

*Tekelec EAGLE<sup>®</sup> 5*  
*Integrated Signaling System*

---

**Feature Manual - INP/AINPO**

910-4480-001 Revision A

November 2006



**TEKELEC**

**Copyright© 2005, 2006 Tekelec.  
All Rights Reserved  
Printed in U.S.A.**

### **Notice**

Information in this documentation is subject to change without notice. Unauthorized use or copying of this documentation can result in civil or criminal penalties.

Any export of Tekelec products is subject to the export controls of the United States and the other countries where Tekelec has operations.

No part of this documentation may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying or recording, for any purpose without the express written permission of an authorized representative of Tekelec.

Other product names used herein are for identification purposes only, and may be trademarks of their respective companies.

RoHS 5/6 - As of July 1, 2006, all products that comprise new installations shipped to European Union member countries will comply with the EU Directive 2002/95/EC "RoHS" (Restriction of Hazardous Substances). The exemption for lead-based solder described in the Annex will be exercised. RoHS 5/6 compliant components will have unique part numbers as reflected in the associated hardware and installation manuals.

WEEE - All products shipped to European Union member countries comply with the EU Directive 2002/96/EC, Waste Electronic and Electrical Equipment. All components that are WEEE compliant will be appropriately marked. For more information regarding Tekelec's WEEE program, contact your sales representative.

### **Trademarks**

The Tekelec logo, EAGLE, G-Flex, G-Port, IP<sup>7</sup>, IP<sup>7</sup>Edge, IP<sup>7</sup> Secure Gateway, and TALI are registered trademarks of Tekelec. TekServer is a trademark of Tekelec. All other trademarks are the property of their respective owners.

### **Patents**

This product is covered by one or more of the following U.S. and foreign patents:

#### U.S. Patent Numbers:

5,008,929, 5,953,404, 6,167,129, 6,324,183, 6,327,350, 6,456,845, 6,606,379, 6,639,981, 6,647,113, 6,662,017, 6,735,441, 6,745,041, 6,765,990, 6,795,546, 6,819,932, 6,836,477, 6,839,423, 6,885,872, 6,901,262, 6,914,973, 6,940,866, 6,944,184, 6,954,526, 6,954,794, 6,959,076, 6,965,592, 6,967,956, 6,968,048, 6,970,542

### **Ordering Information**

For additional copies of this document, contact your sales representative.

# Table of Contents

## Chapter 1. Introduction

Overview .....	1-1
Scope and Audience .....	1-2
Manual Organization .....	1-2
Related Publications .....	1-3
Documentation Packaging, Delivery, and Updates .....	1-8
Documentation Admonishments .....	1-9
Customer Assistance .....	1-10
Customer Care Center .....	1-10
Emergency Response .....	1-10
Acronyms and Abbreviations .....	1-12

## Chapter 2. Feature Description

Overview .....	2-1
MPS/EPAP Platform .....	2-3
EPAP/PDBA Overview .....	2-6
INP/AINPQ Considerations .....	2-10
Network Connections .....	2-12
Serviceability Hints .....	2-17
INP/AINPQ Message Protocol .....	2-21
Primary INP/AINPQ Functions .....	2-21
The Stages of INP/AINPQ Execution .....	2-22

## Chapter 3. INP/ANIPQ Commands

Introduction .....	3-1
EAGLE 5 ISS Commands for INP/AINPQ .....	3-1
Commands .....	3-1
System Debug Services (SDS) Commands .....	3-17
MSU Trap and Trace Command .....	3-17

## Chapter 4. INP/AINPQ Feature Activation

Introduction .....	4-1
Prerequisites .....	4-2
Feature Activation Overview .....	4-4
Feature Activation Procedure .....	4-10

**Chapter 5. Maintenance and Measurements**

Introduction .....	5-1
Maintenance Requirements .....	5-1
EPAP Status and Alarm Reporting .....	5-2
EPAP Maintenance Blocks .....	5-2
DSM Status Requests .....	5-3
Status Reporting to the EPAP .....	5-3
Hourly Maintenance Report .....	5-4
GSM and INP/AINPQ System Hardware Verification .....	5-5
DSM Main Board Verification .....	5-5
DSM Applique Memory Verification .....	5-5
Actions Taken When Hardware Determined to be Invalid .....	5-6
Unstable Loading Mode .....	5-6
GSM System and INP/AINPQ System Status Reporting .....	5-7
System Status Reporting .....	5-7
GSM Status Reporting .....	5-7
INP/AINPQ Status Reporting .....	5-7
DSM Memory Capacity Status Reporting .....	5-7
Loading Mode Support Status Reporting .....	5-8
Code and Application Data Loading .....	5-8
DSM Code Loading .....	5-8
DSM Application Data Loading .....	5-8
EPAP - DSM Loading Interface .....	5-9
Loading Mode Support .....	5-9
State Transitions during Start-Up .....	5-11
INP/AINPQ Subsystem Related Alarms .....	5-15
DSM-EPAP Link .....	5-17
MPS (EPAP) Alarms .....	5-17
Card Related MPS Alarms .....	5-19
GSM Subsystem Alarms .....	5-21
INP/AINPQ Subsystem Alarms .....	5-22
INP/AINPQ Subsystem Related UIMs .....	5-24
INP/AINPQ Measurements .....	5-25
OAM Based Measurements .....	5-25
Measurements Platform .....	5-25
Measurement Reports .....	5-27

**Chapter 6. Prepaid IDP Query Relay Feature**

## Table of Contents

Overview .....	6-1
Feature Description .....	6-2
Call Flows .....	6-2
Service Selection .....	6-7
CDPN Number Format Determination .....	6-8
CDPN Number Conditioning .....	6-10
MNP Database Search .....	6-12
Encoding of Outgoing CDPN .....	6-13
IDPR Commands .....	6-14
IDPR Measurements .....	6-16
Prepaid IDP Query Relay Provisioning and Activation .....	6-16

## Index

# List of Figures

Figure 2-1. MPS/EPAP Platforms for Provisioning INP/AINPQ .....	2-4
Figure 2-2. Customer Provisioning Network .....	2-13
Figure 2-3. EPAP Sync Network .....	2-14
Figure 2-4. DSM Networks .....	2-15
Figure 2-5. Dial-up PPP Network .....	2-16
Figure 4-1. Push in Inject/Eject Clamps .....	4-21
Figure 4-2. Push Inject/Eject Clamps Outward .....	4-29
Figure 4-3. Push in Inject/Eject Clamps .....	4-30
Figure 5-1. Obit Message for Abort of Card Loading .....	5-11
Figure 5-2. INP Not Enabled, DSM Running in TSM Emulation .....	5-12
Figure 5-3. INP Enabled, Normal Operating Sequence .....	5-12
Figure 5-4. INP Enabled, but DSM Memory Less Than 1GB .....	5-12
Figure 5-5. INP Enabled, but DSM Not Connected to EPAP .....	5-13
Figure 5-6. INP Enabled, but DSM Memory Insufficient for Database .....	5-13
Figure 5-7. INP Enabled, but Database Exceeds DSM Memory .....	5-14
Figure 5-8. INP Not Enabled at First, but then Activated on DSM ...	5-14
Figure 5-9. INP Activation Unsuccessful due to Insufficient Database .....	5-15
Figure 6-1. MO Prepaid Call to Ported Out Subscriber .....	6-3
Figure 6-2. MO Prepaid Call to an Imported or Own-Non-Ported Subscriber .....	6-6

# List of Tables

Table 2-1. EPAP IP Addresses in the DSM Network .....	2-16
Table 5-1. INP/AINPQ Subsystem Related UAMs .....	5-15
Table 5-2. INP/AINPQ Subsystem UIM Alarms .....	5-24
Table 5-3. New Pegs for Per System INP/AINPQ Measurements .....	5-26
Table 5-4. Pegs for Per SSP INP/AINPQ Measurements .....	5-26
Table 6-1. IDP Relay Number Conditioning Table .....	6-12



# 1

## Introduction

Overview .....	1-1
Scope and Audience .....	1-2
Manual Organization .....	1-2
Related Publications .....	1-3
Documentation Packaging, Delivery, and Updates .....	1-8
Documentation Admonishments .....	1-9
Customer Assistance .....	1-10
Acronyms and Abbreviations .....	1-12

### Overview

This manual presents an overview of the following features that allow wireline and wireless operators to support service provider portability in telephone networks in locations worldwide except North America. The following features allow subscribers in ITU networks to change to a new service provider while retaining their original phone number.

- INP (INAP-based Number Portability)
- AINPQ (ANSI-41 Query)

These features have many functions in common. The message relay function is the same for both features. Both features support ported variable-length numbers up to 15 digits, without requiring the padding of numbers in the provisioning interfaces. The two features differ in how queries to the Number Portability Database (NPDB) are made:

- The INP feature supports INAP (Intelligent Network Application Protocol) TCAP (Transaction Capabilities Application Part) queries.

- The AINPQ feature supports ANSI-41 (American National Standards Institute) TCAP queries.

To indicate which functions are common to both features and which are unique to a given feature, the following terminology is used in this manual:

- INP/AINPQ indicates functions that apply to either or both of the INP and AINPQ features
- INP, used by itself, indicates function that applies only to the INP feature
- AINPQ, used by itself, indicates function that applies only to the AINPQ feature

The INP and AINPQ features can be enabled independent of each other or both can be enabled on one EAGLE 5 ISS node. However, both features are mutually exclusive with the North American LNP (Local Number Portability) on an EAGLE 5 ISS node. The global title translations (GTT) feature is required for operation of either the INP or AINPQ feature (or both). Both the INP and AINPQ features use feature access keys for enablement.

## Scope and Audience

This manual is intended for anyone responsible for installing, maintaining, and using the INP and/or AINPQ feature in the EAGLE 5 ISS. Users of this manual and the others in the EAGLE 5 ISS family of documents must have a working knowledge of telecommunications and network installations.

## Manual Organization

This document is organized into the following chapters:

- Chapter 1, "Introduction," contains general information about the INP and AINPQ documentation, organization of this manual, and how to get technical assistance.
- Chapter 2, "Feature Description," outlines the concepts and highlights of the INP and AINPQ features. It describes the functions of INP and AINPQ, the services provided by the EPAP and PDPA programs operating in the MPS hardware, the INP and AINPQ user interfaces, and the INP and AINPQ message protocols.
- Chapter 3, "INP/AINPQ Commands," describes the new or updated EAGLE 5 ISS commands that support the INP and AINPQ features. It provides some sample reports and explanations of appropriate command usage.
- Chapter 4, "INP/AINPQ Feature Activation," describes the commands and procedures necessary to configure the INP and/or AINPQ features for the INP/AINPQ subsystem and EAGLE 5 ISS.

## Introduction

- Chapter 5, "Maintenance and Measurements," explains these functions: EPAP status and alarm reporting, DSM status reporting to the EPAP, system hardware verification, system status reporting, commands, code and application data loading, feature related alarms, and measurements.
- Chapter 6, "Prepaid IDP Query Relay Feature," describes functionality and behavior of the Prepaid IDP Query Relay feature and outlines the concepts and highlights of the IDPR feature.

## Related Publications

The *Feature Manual - INP/AINPQ* is part of the EAGLE 5 ISS documentation set and may refer to one or more of the following manuals:

- The *Commands Manual* contains procedures for logging into or out of the EAGLE 5 ISS, a general description of the terminals, printers, the disk drive used on the system, and a description of all the commands used in the system.
- The *Commands Pocket Guide* is an abridged version of the *Commands Manual*. It contains all commands and parameters, and it shows the command-parameter syntax.
- The *Commands Quick Reference Guide* contains an alphabetical listing of the commands and parameters. The guide is sized to fit a shirt-pocket.
- The *Commands Error Recovery Manual* contains the procedures to resolve error message conditions generated by the commands in the *Commands Manual*. These error messages are presented in numerical order.
- The *Database Administration Manual – Features* contains procedural information required to configure the EAGLE 5 ISS to implement these features:
  - X.25 Gateway
  - STP LAN
  - Database Transport Access
  - GSM MAP Screening
  - EAGLE 5 Integrated Monitoring Support.
- The *Database Administration Manual - Gateway Screening* contains a description of the Gateway Screening (GWS) feature and the procedures necessary to configure the EAGLE 5 ISS to implement this feature.

- The *Database Administration Manual – Global Title Translation* contains procedural information required to configure an EAGLE 5 ISS to implement these features:
  - Global Title Translation
  - Enhanced Global Title Translation
  - Variable Length Global Title Translation
  - Interim Global Title Modification
  - Intermediate GTT Load Sharing
  - ANSI-ITU-China SCCP Conversion
  - Flexible GTT Load Sharing
  - Origin-Based SCCP Routing.
- The *Database Administration Manual - IP7 Secure Gateway* contains procedural information required to configure the EAGLE 5 ISS to implement the SS7-IP Gateway.
- The *Database Administration Manual – SEAS* contains the EAGLE 5 ISS configuration procedures that can be performed from the Signaling Engineering and Administration Center (SEAC) or a Signaling Network Control Center (SNCC). Each procedure includes a brief description of the procedure, a flowchart showing the steps required, a list of any EAGLE 5 ISS commands that may be required for the procedure but that are not supported by SEAS, and a reference to optional procedure-related information, which can be found in one of these manuals:
  - *Database Administration Manual – Gateway Screening*
  - *Database Administration Manual – Global Title Translation*
  - *Database Administration Manual – SS7.*
- The *Database Administration Manual – SS7* contains procedural information required to configure an EAGLE 5 ISS to implement the SS7 protocol.
- The *Database Administration Manual – System Management* contains procedural information required to manage the EAGLE 5 ISS database and GPLs, and to configure basic system requirements such as user names and passwords, system-wide security requirements, and terminal configurations.
- The *Dimensioning Guide for EPAP Advanced DB Features* is used to provide EPAP planning and dimensioning information. This manual is used by Tekelec personnel and EAGLE 5 ISS customers to aid in the sale, planning, implementation, deployment, and upgrade of EAGLE 5 ISS systems equipped with one of the EAGLE 5 ISS EPAP Advanced Database (EADB) Features.

## Introduction

- The *ELAP Administration Manual* defines the user interface to the EAGLE 5 ISS LNP Application Processor on the MPS/ELAP platform. The manual defines the methods for accessing the user interface, menus, screens available to the user and describes their impact. It provides the syntax and semantics of user input and defines the output the user receives, including information and error messages, alarms, and status.
- The *EPAP Administration Manual* describes how to administer the EAGLE 5 ISS Provisioning Application Processor on the MPS/EPAP platform. The manual defines the methods for accessing the user interface, menus, and screens available to the user and describes their impact. It provides the syntax and semantics of user input and defines the output the user receives, including messages, alarms, and status.
- The *Feature Manual - EIR* provides instructions and information on how to install, use, and maintain the EIR feature on the Multi-Purpose Server (MPS) platform of the EAGLE 5 ISS. The feature provides network operators with the capability to prevent stolen or disallowed GSM mobile handsets from accessing the network.
- The *Feature Manual - G-Flex C7 Relay* provides an overview of a feature supporting the efficient management of Home Location Registers in various networks. This manual gives the instructions and information on how to install, use, and maintain the G-Flex feature on the Multi-Purpose Server (MPS) platform of the EAGLE 5 ISS.
- The *Feature Manual - A-Port* provides an overview of a feature providing the capability for IS41 mobile subscribers to change service provider while retaining their original Mobile Directory Number (MDN). This manual gives the instructions and information on how to install, use, and maintain the A-Port feature on the Multi-Purpose Server (MPS) platform of the EAGLE 5 ISS.
- The *Feature Manual - G-Port* provides an overview of a feature providing the capability for mobile subscribers to change the GSM subscription network within a portability cluster while retaining their original MSISDNs. This manual gives the instructions and information on how to install, use, and maintain the G-Port feature on the Multi-Purpose Server (MPS) platform of the EAGLE 5 ISS.
- The *Feature Manual - Migration* provides an overview of a feature providing the capability for IS41 subscribers to migrate to a GSM network and GSM mobile subscribers to migrate to an IS41 network. This manual gives the instructions and information on how to install, use, and maintain the Migration feature on the Multi-Purpose Server (MPS) platform of the EAGLE 5 ISS.
- The *FTP-Based Table Retrieve Application (FTRA) User Guide* describes how to set up and use a PC to serve as the offline application for the EAGLE 5 ISS FTP Retrieve and Replace feature.

- The *Hardware Manual - EAGLE 5 ISS* contains hardware descriptions and specifications of Tekelec's signaling products. These include the EAGLE 5 ISS, OEM-based products such as the ASi 4000 Service Control Point (SCP), the Netra-based Multi-Purpose Server (MPS), and the Integrated Sentinel with Extended Services Platform (ESP) subassembly.

The Hardware Manual provides an overview of each system and its subsystems, details of standard and optional hardware components in each system, and basic site engineering. Refer to this manual to obtain a basic understanding of each type of system and its related hardware, to locate detailed information about hardware components used in a particular release, and to help configure a site for use with the system hardware.

- The *Hardware Manual - Tekelec 1000 Application Server* provides general specifications and a description of the Tekelec 1000 Applications Server (T1000 AS). This manual also includes site preparation, environmental and other requirements, procedures to physically install the T1000 AS, and troubleshooting and repair of Field Replaceable Units (FRUs).
- The *Hardware Manual - Tekelec 1100 Application Server* provides general specifications and a description of the Tekelec 1100 Applications Server (T1100 AS). This manual also includes site preparation, environmental and other requirements, procedures to physically install the T1100 AS, and troubleshooting and repair of Field Replaceable Units (FRUs).
- The *Installation Manual - EAGLE 5 ISS* contains cabling requirements, schematics, and procedures for installing the EAGLE 5 ISS along with LEDs, connectors, cables, and power cords to peripherals. Refer to this manual to install components or the complete systems.
- The *Installation Manual - Integrated Applications* provides the installation information for integrated applications such as EPAP 4.0 or earlier (Netra-based Multi-Purpose Server (MPS) platform) and Sentinel. The manual includes information about frame floors and shelves, LEDs, connectors, cables, and power cords to peripherals. Refer to this manual to install components or the complete systems.
- The *LNP Database Synchronization Manual - LSMS with EAGLE 5 ISS* describes how to keep the LNP databases at the LSMS and at the network element (the EAGLE 5 ISS is a network element) synchronized through the use of resynchronization, audits and reconciles, and bulk loads. This manual is contained in both the LSMS documentation set and in the EAGLE 5 ISS documentation set.
- The *LNP Feature Activation Guide* contains procedural information required to configure the EAGLE 5 ISS for the LNP feature and to implement these parts of the LNP feature on the EAGLE 5 ISS:
  - LNP services
  - LNP options

## Introduction

- LNP subsystem application
- Automatic call gapping
- Triggerless LNP feature
- Increasing the LRN and NPANXX Quantities on the EAGLE 5 ISS
- Activating and Deactivating the LNP Short Message Service (SMS) feature.
- The *Maintenance Manual* contains procedural information required for maintaining the EAGLE 5 ISS and the card removal and replacement procedures. The *Maintenance Manual* provides preventive and corrective maintenance procedures used in maintaining the different systems.
- The *Maintenance Pocket Guide* is an abridged version of the Maintenance Manual and contains all the corrective maintenance procedures used in maintaining the EAGLE 5 ISS.
- The *Maintenance Emergency Recovery Pocket Guide* is an abridged version of the Maintenance Manual and contains the corrective maintenance procedures for critical and major alarms generated on the EAGLE 5 ISS.
- The *MPS Platform Software and Maintenance Manual - EAGLE 5 ISS with Tekelec 1000 Application Server* describes the platform software for the Multi-Purpose Server (MPS) based on the Tekelec 1000 Application Server (T1000 AS) and describes how to perform preventive and corrective maintenance for the T1000 AS-based MPS. This manual should be used with the EPAP-based applications (EIR, G-Port, G-Flex, A-Port, Migration, and INP).
- The *MPS Platform Software and Maintenance Manual - EAGLE 5 ISS with Tekelec 1100 Application Server* describes the platform software for the Multi-Purpose Server (MPS) based on the Tekelec 1100 Application Server (T1100 AS) and describes how to perform preventive and corrective maintenance for the T1100 AS-based MPS. This manual should be used with the ELAP-based application (LNP).
- The *Provisioning Database Interface Manual* defines the programming interface that populates the Provisioning Database (PDB) for the EAGLE 5 ISS features supported on the MPS/EPAP platform. The manual defines the provisioning messages, usage rules, and informational and error messages of the interface. The customer uses the PDBI interface information to write his own client application to communicate with the MPS/EPAP platform.
- The *Previously Released Features Manual* summarizes the features of previous EAGLE, EAGLE 5 ISS, and IP<sup>7</sup> Secure Gateway releases, and it identifies the release number of their introduction.

- The *Release Documentation* contains the following documents for a specific release of the system:
  - *Feature Notice* - Describes the features contained in the specified release. The Feature Notice also provides the hardware baseline for the specified release, describes the customer documentation set, provides information about customer training, and explains how to access the Customer Support website.
  - *Release Notice* - Describes the changes made to the system during the lifecycle of a release. The Release Notice includes Generic Program Loads (GPLs), a list of PRs resolved in a build, and all known PRs.  
**NOTE: The *Release Notice* is maintained solely on Tekelec's Customer Support site to provide you with instant access to the most up-to-date release information.**
  - *System Overview* - Provides high-level information on SS7, the IP7 Secure Gateway, system architecture, LNP, and EOAP.
  - *Master Glossary* - Contains an alphabetical listing of terms, acronyms, and abbreviations relevant to the system.
  - *Master Index* - Lists all index entries used throughout the documentation set.
- The *System Manual – EOAP* describes the Embedded Operations Support System Application Processor (EOAP) and provides the user with procedures on how to implement the EOAP, replace EOAP-related hardware, device testing, and basic troubleshooting information.

## Documentation Packaging, Delivery, and Updates

Customer documentation is provided with each system in accordance with the contract agreements. It is updated whenever significant changes that affect system operation or configuration are made. Updates may be issued as an addendum, or a reissue of the affected documentation.

The document part number appears on the title page along with the current revision of the document, the date of publication, and the software release that the document covers. The bottom of each page contains the document part number and date of publication.

Two types of releases are major software releases and maintenance releases. Maintenance releases are issued as addenda with a title page and change bars. On changed pages, the date and document part number are changed; on unchanged pages that accompany the changed pages, the date and document part number are unchanged.

## Introduction

When the software release has a minimum affect on documentation, an addendum is provided. The addendum contains an instruction page, a new title page, a change history page, and replacement chapters with the date of publication, the document part number, and change bars.

If a new release has a major impact on documentation, such as a new feature, the entire documentation set is reissued with a new part number and a new release number.

## Documentation Admonishments

Admonishments are icons and text occurring throughout the EAGLE 5 ISS manual set that alert the reader to assure personal safety, to minimize possible service interruptions, and to warn of the potential for equipment damage. The EAGLE 5 ISS manuals have three admonishments, listed in descending levels of priority.

	<b>DANGER:</b> (This icon and text indicate the possibility of <i>personal injury</i> .)
	<b>WARNING:</b> (This icon and text indicate the possibility of <i>equipment damage</i> .)
	<b>CAUTION:</b> (This icon and text indicate the possibility of <i>service interruption</i> .)

## Customer Assistance

The Tekelec Customer Care Center offers a point of contact through which customers can receive support for problems. The Tekelec Customer Care Center is staffed with highly-trained engineers to provide solutions to technical questions and issues seven days a week, twenty-four hours a day. A variety of service programs are available through the Tekelec Customer Care Center to maximize the performance of Tekelec products that meet and exceed customer needs

### Customer Care Center

To receive technical assistance, call the Tekelec Customer Care Center at one of the following locations by one of the following methods:

- Tekelec, UK

Phone: +44 1784 467804

Fax: +44 1784 477120

Email: *ecsc@tekelec.com*

- Tekelec, USA

Phone (within continental US): (888) 367-8552

(outside continental US): +1 919-460-2150

Fax: 919-460-2126

Email: *support@tekelec.com*

When the call is received, a Customer Service Report (CSR) is issued to record the request for service. Each CSR includes an individual tracking number.

Once a CSR is issued, Technical Services determines the classification of the trouble. If a critical problem exists, emergency procedures are initiated. If the problem is not critical, information regarding the serial number of the system, COMMON Language Location Identifier (CLLI), initial problem symptoms (includes outputs and messages) is recorded. A primary Technical Services engineer is also assigned to work on the CSR and provide a solution to the problem. The CSR is closed when the problem is resolved.

### Emergency Response

In the event of a critical service situation, emergency response is offered by Tekelec Technical Services twenty-four hours a day, seven days a week. The emergency response provides immediate coverage, automatic escalation, and other features to ensure that the critical situation is resolved as rapidly as possible.

## **Introduction**

A critical situation is defined as a problem with an EAGLE 5 ISS that severely affects service, traffic, or maintenance capabilities, and requires immediate corrective action. Critical problems affect service and/or system operation resulting in:

- A total system failure that results in loss of all transaction processing capability
- Significant reduction in system capacity or traffic handling capability
- Loss of the system's ability to perform automatic system reconfiguration
- Inability to restart a processor or the system
- Corruption of system databases that requires service affecting corrective actions
- Loss of access for maintenance or recovery operations
- Loss of the system ability to provide any required critical or major trouble notification

Any other problem severely affecting service, capacity/traffic, billing, and maintenance capabilities may be defined as critical by prior discussion and agreement with Tekelec Technical Services.

## Acronyms and Abbreviations

ACN.....	Application Context Name
ADL.....	Application Data Loader
ADU.....	Application Defined User Alarms
AINPQ.....	ANSI-41 INP Query
AuC.....	Authentication Center
APDU.....	Application Protocol Data Unit
A-Port.....	ANSI Mobile Number Portability
CC.....	E.164 Country Code
CCBS.....	Completion of Call to Busy Subscriber
CCNR.....	Completion of Call on No Reply
CCRNDN.....	Country Code + Routing Number + Dialed Number
CDPA.....	Called Party Address, an SCCP parameter in a UDT message
CDPN.....	INP Called Party Number (TCAP parameter in IDP message)
CDPNNAI.....	CDPN Nature of Address Indicator
CDPNPFX.....	CDPN Prefix digits
CGPA.....	Calling Party Address, an SCCP parameter in a UDT message
CDU.....	CAP Download Utility
CPC.....	Capability Point Code
CSL.....	Common Screening List
DCB.....	Device Control Block
DGTSDIAL.....	Dialed digits
DLTPFX.....	Delete CDPN Prefix digits
DN.....	Directory Number
DPC.....	Destination Point Code
DRA.....	Destination Routing Address, a parameter containing RN, RN+DN, CC+RN+DN, or RN+NEC_DN in an INP Connect response or in an AINPQ Return Result with Digits

## Introduction

DSM .....	Database Services Module
EMS.....	Element Management System
EOAP .....	Embedded OAP
EPAP .....	Eagle Provisioning Application Processor
ES.....	Encoding Scheme
ETSI.....	European Telecommunications Standards Institution
FAK .....	Feature Access Key
FTA .....	File Transfer Area
G-Flex .....	GSM Flexible Numbering
GMSC .....	Gateway MSC
GPDB .....	G-Port Database
G-Port .....	GSM Mobile Number Portability
GPL .....	Generic Program Load
GSM .....	Global System for Mobile communications
GTA.....	Global Title Address
GTAI .....	Global Title Address Information
GTI .....	Global Title Indicator
GTT .....	Global Title Translation
HCAP .....	High Capacity/Speed Application Processor
HLR.....	Home Location Register
HRN.....	Home Routing Number
IAM.....	Initial Address Message
IDP .....	Initial Detection Point
IDPR.....	Prepaid IDP Query Relay Feature
IEC .....	International Escape Code
IMSI .....	International Mobile Station Identifier
IN .....	Intelligent Network
IS-NR .....	In Service - NoRmal
INAP .....	Intelligent Network Application Protocol
INE.....	Interrogating Network Entity

INN .....	Internal Network Number
INP .....	INAP-based Number Portability
IP .....	Internet Protocol
ISDN .....	Integrated Services Digital Network
ISS.....	Integrated Signaling System
ISUP .....	ISDN User Part
ITU .....	International Telecommunications Union
LIM.....	Link Interface Module
LNP .....	Local Number Portability
LSS.....	Local Subsystem
MAP .....	(1) Mobile Application Part (2) Mated APplication
MAS .....	Maintenance and Administration Subsystem
MCAP .....	MAS Communication Application Processor Card
MEA.....	Mismatch of Equipment and Attributes
MGT .....	Mobile Global Title
MNP.....	Mobile Number Portability
MPS.....	Multi-Purpose Server
MR.....	INP Message Relay
MS .....	Mobile Station
MSC.....	Mobile Switching Center
MSISDN.....	Mobile Station international ISDN number
MSRN .....	Mobile Station Roaming Number
MSU .....	Message Signaling Unit
MTP.....	Message Transfer Part
NAI .....	Nature of Address Indicator
NAIV.....	NAI Value
NC .....	E.214 Network Code, either the National Destination Code (NDC), as defined in Recommendation E.164, or the NDC and some additional E.164 digits
NDC .....	E.164 National Destination Code

## Introduction

NE .....	Network Element
NEBS .....	Network Equipment-Building System generic equipment requirements
NEC .....	National Escape Code
NP .....	(1) Number Portability (2) Numbering Plan
NPA .....	Numbering Plan Area
NPDB .....	Number Portability Database
npreq response .....	Response to Number Portability Request with the TCAP Return Result component
NPREQ .....	Number Portability Request message with the TCAP Invoke component
NPV .....	Numbering Plan Value
NSD .....	Network Switching Division, Tekelec
OAM .....	Operation Administration & Maintenance
OAP .....	Operations Support System/Application Processor
OPS .....	Operator Provisioning System
OTID .....	Originating Transaction ID
PC .....	Point Code
PDB .....	Provisioning Database
PDBI .....	Provisioning Database Interface
PFS .....	Product Functional Specification
PLMN .....	Public Land Mobile Network
PMTC .....	Peripheral Maintenance
POI .....	Point of Interconnection
PPP .....	Point-to-Point Protocol
Provlk .....	Link between EPAP and external provisioning system
QS .....	INP/AINPQ Query Service
RAID .....	Redundant Array of Independent Disks
RI .....	Routing Indicator
RMTP .....	Reliable Multicast Transport Protocol, a product of Globalcast Communications

RN .....	Routing Number
RNDN.....	Routing Number + Directory Number
RNIDN .....	Routing Number + International DN
RNNDN.....	Routing Number + National DN
RNNECDN .....	Routing Number + National Escape Code + National DN
RNSDN.....	Routing Number + Subscriber DN
RTDB.....	Real-Time DataBase (also called the MPS database)
SCCP .....	Signalling Connection Control Part
SCF .....	Service Control Function
SCM.....	System Configuration Manager
SCP .....	Service Control Point
SIM .....	Subscriber Identity Module
SMS .....	Service Management System
SMSC .....	Short Message Service Center
SNAI .....	Service Nature of Address Indicator
SNP .....	Service Numbering Plan
SP .....	Signalling Point
SOR .....	Support of Optimal Routing
SPC .....	Secondary Point Code
SRF .....	Signaling Relay Function
SRI .....	Send Routing Information
SSF .....	Service Switching Function
SSN.....	Subsystem Number
SSP.....	Service Switching Point
ST.....	Stop Digit, BCD value 15 (0xF)
STP .....	Signal Transfer Point
TCAP .....	Transaction Capabilities Application Part
TCP.....	Transmission Control Protocol
TDM.....	Terminal Disk Module

## Introduction

TPC .....	True Point Code
TT .....	Translation Type
UAM .....	Unsolicited Alarm Message
UDP .....	User Datagram Protocol
UDT .....	Unitdata
UDTS .....	Unit Data Transfer Service
UIM.....	Unsolicited Information Message
VLR .....	Visitor Location Register
VMSC .....	Visited MSC
VMSC .....	Voice Mail Service Center
VSCCP .....	VxWorks Signalling Connection Control Part GPL



## Feature Description

Overview .....	2-1
MPS/EPAP Platform .....	2-3
EPAP/PDBA Overview .....	2-6
INP/AINPQ Considerations.....	2-10
Network Connections .....	2-12
Serviceability Hints.....	2-17
INP/AINPQ Message Protocol .....	2-21
Primary INP/AINPQ Functions.....	2-21
The Stages of INP/AINPQ Execution .....	2-22

### Overview

Throughout the world, wireline and wireless operators are receiving directives from their national regulators to support service provider number portability in their networks. The INP and AINPQ features provide subscribers the ability to switch their telephone service to a new service provider while retaining their original telephone number.

While the advent of number portability is good news for consumers, it presents many challenges for network operators. Tekelec's INP and AINPQ features minimize those challenges for network operators, while enabling them to efficiently meet their regulatory obligations. (

**NOTE: Both INP and AINPQ are mutually exclusive with their North American equivalent, LNP, on an EAGLE 5 ISS node. That is, if LNP is enabled on an EAGLE 5 ISS node, neither INP nor AINPQ can be enabled on that node, and if either INP or AINPQ or both are enabled on an EAGLE 5 ISS node, LNP cannot be enabled on that node.**

Tekelec uses an NPDB (number portability database) to provide fully functional support (both message relay and queries) for number portability in an ITU network. Both the INP and AINPQ features use the same NPDB. INP and AINPQ differ in the TCAP query type used.

The following functions are available for both the INP and AINPQ features:

- Support for ported number lengths up to 15 digits.
  - In addition, true variable-length numbers are supported without requiring padding of numbers in the provisioning and other input/output interfaces.
  - Number lengths vary between countries and may even vary within a country. As a result, the NPDB structure supports numbers of varying length in a flexible way without requiring software modifications. A maximum number length of 15 digits for ported numbers is supported.
- The INP and AINPQ features can be provisioned to remove automatically a special prefix (that is, an access code such as '0' or '1'). This capability allows INP/AINPQ to accommodate SSPs that do or do not include the prefix in their queries to the NPDB. Also, INP/AINPQ can be provisioned to accept queries with or without special prefixes on the DN. In this situation, INP/AINPQ can strip off the prefix, perform a database query using the international version of the DN, and return a response to the switch. These capabilities, referred to as number normalization, are options the customer can provision.

INP/AINPQ number normalization also allows the operator to specify NAI values via configuration parameters. The configuration parameters are set to specify rules that map incoming NAI values to service NAI values for the purpose of number conditioning.

- The INP and AINPQ features can be provisioned to remove automatically the National Escape Code (NEC) that may be up to five hexadecimal digits.
- The INP and AINPQ features can be deployed either in the same node that also performs the STP function or as a stand-alone node without STP function. The INP/AINPQ executes on the same MPS platform as other Tekelec features, such as G-Flex and G-Port.

## Feature Description


### MPS/EPAP Platform

Tekelec provides the MPS (Multi-Purpose Server) platform as a subsystem of the EAGLE 5 ISS. The MPS provides support for multiple features, such as the INP, AINPQ, EIR, G-Flex, G-Port, A-Port, and IS-41 GSM Migration features.

The MPS is composed of hardware and software components that interact to create a secure and reliable platform. (For details about the MPS hardware, refer to the *Tekelec 1000 Application Server Hardware Manual*.) The MPS provides the means of interfacing the customer provisioning application with the EAGLE 5 ISS. It connects the customer with the EAGLE 5 ISS and accepts the customer number portability data, while accommodating numbers of varying lengths.

The EAGLE Provisioning Application Processor (EPAP) is the software that runs on the MPS hardware platform. It collects and organizes customer provisioning data, and forwards it to the EAGLE 5 ISS DSM cards. Figure 2-1 shows the overall system architecture, providing a graphic overview of MPS/EPAP platform from customer provisioning through the MPS subsystem to the EAGLE 5 ISS DSM databases.

Figure 2-1. MPS/EPAP Platforms for Provisioning INP/AINPQ

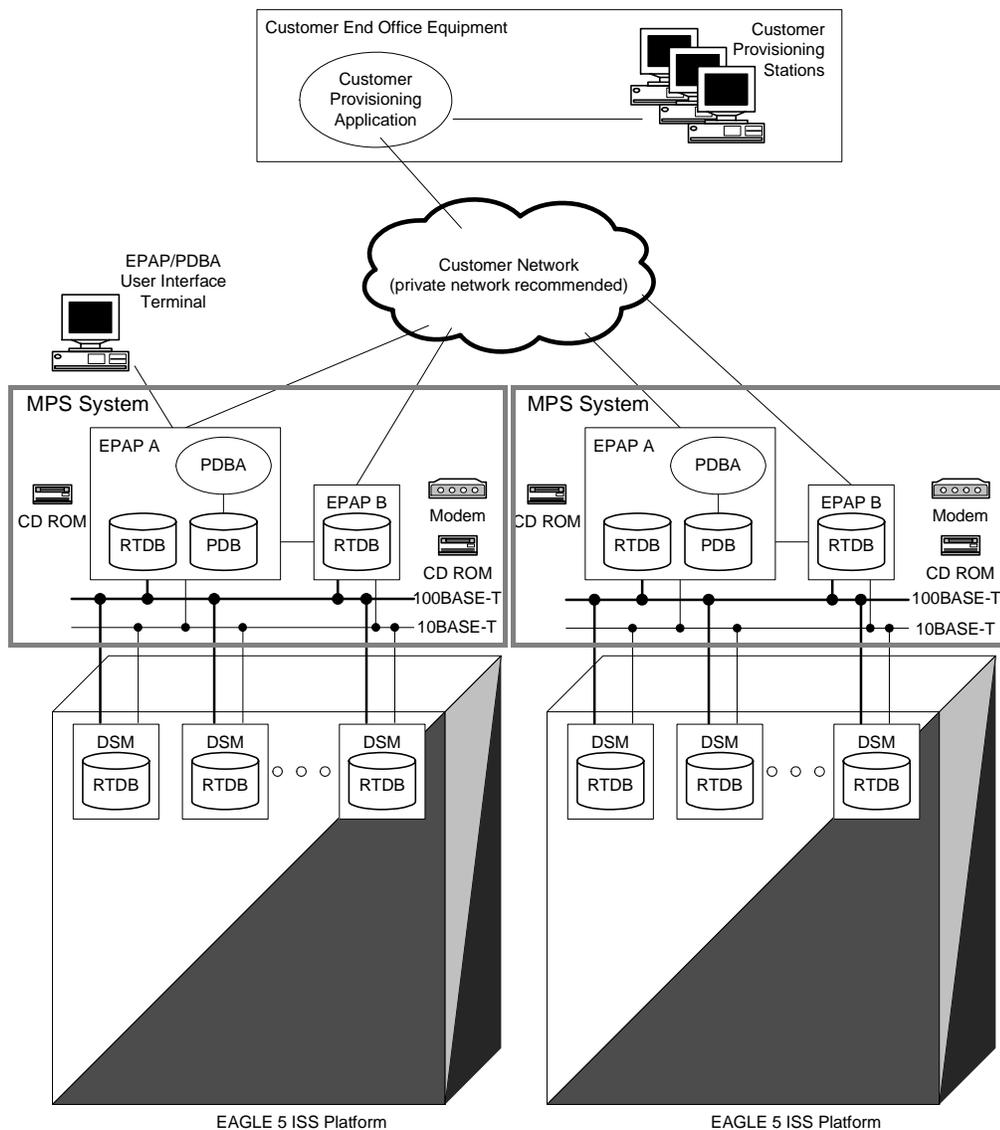

**Design Overview and System Layout**

Figure 2-1 illustrates the overall system architecture of INP/AINPQ and identifies the different tasks, databases and interfaces involved. The system consists of two mated MPS servers. Each MPS contains two EPAP platforms, EPAP A and EPAP B, a RealTime Database, a Provisioning Database, servers, CD ROMs, modems, and network hubs. Each MPS and its EPAPs may be thought of as an ‘EPAP system’; the EPAP system at the mated EAGLE 5 ISS is referred to as the ‘mated EPAP system’. Each EPAP system is a T1000 AS system with a total of four Ethernet interfaces.

## Feature Description

On the EAGLE 5 ISS platform side, a set of DSMs, which hold the NPDB, is part of the STP. Two high-speed Ethernet links connect the DSMs and the EPAPs. One of the links is a 100BASE-T Ethernet bus, and the other is a 10BASE-T Ethernet bus.

The NPDB is provisioned and maintained through the EPAPs. EPAP A and EPAP B act as the active EPAP and the standby EPAP. One link serves as the active link, and the other as the standby link. At any given time, there is only one active EPAP and one active link. The database is provisioned through the active link by the active EPAP; the other EPAP provides redundancy.

In case of failure of the active EPAP, the standby EPAP takes over the role of active EPAP and continues to provision the NPDB. In the case where the active link fails, the active EPAP switches to the standby link to continue provisioning the DSMs. The two Ethernet links are part of the DSM network. See “DSM Networks” on page 2-14.

Another 100BASE-T Ethernet link exists between the EPAPs; that link is called the EPAP sync network. See the “EPAP Sync Network” on page 2-14.

Major modules on the EPAP are the:

- DSM provisioning module
- Maintenance module
- RTDB module
- PDB module

The DSM provisioning module is responsible for updating NPDBs on the EAGLE 5 ISS DSM cards using the RMTP multicast. The maintenance module is responsible for the proper functioning of the EPAP platform. The PDB module is responsible for preparing and maintaining the Real Time Database, which is the “golden copy” of the NPDB (number portability database). The PDB module can run on one of the EPAPs of either of the mated EAGLE 5 ISSs.

### Functional Overview

The main function of the MPS/EPAP platform is to provision the INP and AINPQ data from the customer network to the DSM cards on the STP. INP/AINPQ database records are continuously updated from the customer network to the PDB. The PDB module communicates with the maintenance module and the RTDB task over a TCP/IP socket to provision the DSM cards on the EAGLE 5 ISS. The maintenance module is responsible for the overall stability and performance of the system.

It is possible for the DSM database to get out-of-sync due to missed provisioning or card rebooting. Therefore, the RTDB contains a coherent, current copy of the DSM database. The EPAP-DSM provisioning task sends database information out on the provisioning link. The DSM cards act as the receivers and are reprovisioned.

## EPAP/PDBA Overview

The EAGLE Provisioning Application Processor (EPAP) platform and the Provisioning Database Application (PDBA) coupled with the Provisioning Database Interface (PDBI) facilitate the database required for the INP and AINPQ features. It performs the following two basic functions in support of the INP and AINPQ features:

- Accept and store INP and/or AINPQ data provisioned by the customer
- Update and reload the NPDBs on the DSM cards

The PDBA operates on the master INP/AINPQ provisioning database (PDB). The EPAP and PDBA are both installed on the MPS hardware platform. Figure 2-1 shows the overall system architecture, including a graphic path of INP/AINPQ data from the customer provisioning through the MPS subsystem to the EAGLE 5 ISS DSM databases.

The EPAP platform maintains an exact copy of the real-time database (RTDB) required by the EAGLE 5 ISS DSM cards, provisions the EAGLE 5 ISS DSM cards, and maintains redundant copies of both databases on mated EPAP hardware. The EPAP platform is a mated pair of processors (the upper processor, called EPAP A, and the lower processor, EPAP B) contained in one frame.

During normal operation, information flows through the EPAP/PDBA software with no intervention. INP or AINPQ data is generated at one or more operations centers and is delivered to the PDBA through a TCP socket interface (PDBI). The PDBA software stores and replicates data on EPAP A on the mated EPAP system. The data is then transmitted across a private network to the DSM cards located in the EAGLE 5 ISS frame by the EPAPs.

The primary interface to the PDBA consists of machine-to-machine messages. The interface is defined by Tekelec and is available in the *Provisioning Database Interface Manual*. Use that manual to update or create provisioning software compatible with the EPAP socket interface.

A direct user interface is provided on each EPAP to allow configuration, maintenance, debugging, and platform operations. A direct user interface is also provided by the PDBA for configuration and database maintenance.

The MPS/EPAP is an open systems platform and easily accommodates the high provisioning rates that INP/AINPQ requires. Implementing the persistent database and provisioning as an open systems platform, compared to the traditional OAM platform, provides these benefits:

- Variety of hardware components and vendors
- Availability of third party communication and database tools
- Standard communication protocols
- Availability of personnel with related experience

## Feature Description

Each EPAP server maintains a copy of the real-time database in order to provision the EAGLE 5 ISS DSM cards. The EPAP server must comply with the hardware requirements in *Tekelec 1000 Application Server Hardware Manual*. Figure 2-1 illustrates the EPAP architecture contained in the MPS subsystem.

Each EPAP has a dedicated CD ROM drive. One EPAP per EAGLE 5 ISS platform has a modem capable of supporting remote diagnostics, remote configuration, and remote maintenance; these remote operations are performed through EPAP login sessions. These sessions are accessible across the customer network (that is, the telnet) as well as through direct terminal connection to the EPAP via an RS232 connection. Also, tape drives support backup and restore operations. Refer to the *Tekelec 1000 Application Server Hardware Manual* for details about the hardware devices and network connections.

### INP and AINPQ Features

The INP and AINPQ features minimize challenges for network operators while they plan to implement number portability for their subscribers.

INP and AINPQ can operate on the same node as Tekelec features G-Port, A-Port, and G-Flex. Following is a summary of INP and AINPQ functions:

- Because the number lengths can vary between countries (sometimes even within a country), the INP and AINPQ features support numbers of varying lengths in a flexible way, without requiring software modifications. The maximum number length of 15 digits for ported numbers is supported.
  - INP performs number portability translations based on the received Called Party Number (CDPN) in the INAP portion of the message. For call-related messages, the database query is performed by using the digits from the Called Party Number parameter and converting them to an international number, if the number is not already in international format.
  - AINPQ performs number portability translations based on the received dialed digits (DGTSDIAL).
- The INP and AINPQ features can remove automatically the National Escape Code (NEC) that may be up to five hexadecimal digits.
- The INP and AINPQ features avoid problem situations with number normalization. In certain cases, problems could occur where operators do not use NAI values that match the EAGLE 5 ISS's current number conditioning process. For example, a switch might send an NAI of a subscriber and expect the number to be treated as a National number, leading to problems.

Number normalization also allows the user to specify how certain NAI (Nature of Address Indicator) values are to be treated. This value treatment is performed by setting up rules that map incoming NAI values to internal SNAI

(Service Nature of Address Indicator) values for the purpose of number conditioning.

Another potential difficulty in some networks, users dial a special prefix, such as a '0' or '1' (that is, an "access code"), before dialing the digits for the party they are trying to reach. Some SSPs strip off this prefix and do not include it in the query to the NPDB. However, other SSPs send the query using the entire dialed number, including the prefix.

Number normalization lets INP and AINPQ accept queries either with or without special prefixes on the DN. Upon receipt, INP or AINPQ strips off the prefix, if present, converts the DN to an international number, performs the database query, and returns a response to the switch. The Called Party Number (for the INP feature) or the dialed digits (for the AINPQ feature) in the response can include the special prefix or not, depending on how the operator configures the feature.

### **EPAP (Eagle Provisioning Application Processor)**

As shown in Figure 2-1, a MPS/EPAP platform contains two EPAP servers to provide the INP and/or AINPQ service. At any given time, only one EPAP actively communicates with the DSMs. The other EPAP is in standby mode.

The primary purpose of the EPAPs is to maintain the provisioning database (PDB) and to download copies of the RTDB to the DSM cards. The EPAP receives INP/AINPQ data from the customer network through the PDBI, the external source of INP/AINPQ provisioning information. The PDBI continually updates the active EPAP's PDB. Once an update is applied to the active PDB, it is sent to the RTDBs on the active and standby EPAPs.

Each EPAP maintains a copy of the RTDB. When a DSM needs a copy of the RTDB, the EPAP downloads the file to the DSM for its own resident copy of the RTDB database.

The EPAP maintains a file of database updates to be sent to the DSMs. This file contains the changes necessary to keep the DSM files current relative to the RTDB database.

### **DSM (Database Services Module)**

The INP and/or AINPQ feature can provision from 1 to 25 DSM cards. The DSM cards have two Ethernet links, as shown in Figure 2-1.

- The INP feature requires each DSM card to have at least 1 GB capacity.
- The AINPQ feature requires each DSM card to have at least 4 GB capacity.

Multiple DSMs provide a means of load balancing in high-traffic situations. The DSM database is in a format that facilitates rapid lookups. Each DSM contains an identical database. Furthermore, all DSM NPDBs are identical to the RTDB maintained by the EPAPs.

## Feature Description

However, the various databases may not be identical at all times for several reasons. First of all, when a DSM card is initialized, it downloads the current copy of the database from the EPAP. While that card is being downloaded, it cannot provide VSCCP services. Another condition that can result in databases being out-of-sync occurs when the EPAP receives updates from its provisioning source, but it has not yet sent them down to the DSM cards. Updates are applied to the provisioning database as they are received.

Two possible scenarios contribute to a condition where a DSM may not have enough memory to hold the entire database. In the first case, the database is downloaded successfully to the DSM, but subsequent updates eventually increase the size of the database beyond the capacity of the DSM memory. In this situation, it is desirable to continue processing INP/AINPQ transactions, even though the database may not be as up-to-date as it could be.

The other case occurs when a DSM card is booted. If it is determined then that the card does not have enough memory for the entire database, the database is not loaded on that card. Each DSM is responsible for recognizing and reporting its out-of-memory conditions by means of alarms.

### Overview of EPAP to DSM Communications

Before discussing DSM status reporting or EPAP status reporting, it is helpful to understand the communications between the DSMs and the EPAP in broad terms.

- UDP - sending DSM status messages

The DSMs and EPAPs create a UDP (User Datagram Protocol) socket, which is used for status messages. One of the last things a DSM does when it is initialized is to send a status message to the EPAP, containing the DSM ID, database level, and memory size. The EPAP maintains tables containing the last known status of each DSM. EPAP uses these to determine whether or not the DSM needs to download the database.

- IP - reporting EPAP maintenance data

The DSMs create an TCP/IP socket when they are initialized, and listen for connection requests. During initialization or after a loss of connectivity, the active EPAP chooses one of the DSMs and issues a *Connect* to establish the TCP/IP connection with that DSM (referred to as the Primary DSM). The purpose of this link is to provide a path for reporting EPAP alarms and to forward maintenance blocks to the DSM.

- IP Multicast - downloading GSM database

Because of the large size of the database and the need to download it quickly on up to 25 DSM cards, EPAP uses a technique known as IP multicasting. This technique is based on Reliable Multicast Transport Protocol-II (RMTP-II), a product of Globalcast Communications. IP multicasting downloads the RTDB and database updates to the DSMs.

The administration of IP multicasting is based on the concept of a “tree”, or stream of data, which is constantly being broadcast by the EPAP. DSMs that need to download the real time database or to receive database updates “join the tree”. DSMs can also “leave the tree”, typically when the database fills their available memory.

### **Incremental Downloading**

Once a download is in progress, it is possible for another DSM to determine that it also needs to download the file. The new DSM can “jump in” and join the download in progress and begin its download with whatever record is currently being sent. When the last record in the file has been sent, the EPAP restarts the download from the beginning. The EPAP then sends the records that the new DSM needs to complete its database.

### **EPAP Status and Error Reporting via Maintenance Blocks**

The EPAPs forward all status and error messages to the DSMs in maintenance blocks. Maintenance blocks are asynchronously sent whenever the EPAP has something to report. The maintenance blocks eventually update EPAP DCBs located on the EAGLE 5 ISS.

### **INP/AINPQ Considerations**

The following list contains considerations you should think over before installing and operating the INP and/or AINPQ feature:

1. The INP and the AINPQ features can co-exist on the same node if they share the same Subsystem Number (SSN).
2. INP and AINPQ responses are not routed by Global Title Translation.
3. The maximum length of the Application Context Name Object Identifier is 32 digits.
4. It is possible that PCs and/or PC + SSNs that are in the entity table of the database and are referenced by subscriber entries do not have the required data present on the EAGLE 5 ISS to route messages to them.

For example, the PC may not have a route, or the PC+SSN may not be in the MAP table for a final GTT. In these cases, a UIM is output only when a message is discarded due to the lack of data. These data problems can be reduced by careful provisioning of the route and MAP tables.

## Feature Description

5. For INP Message Relay messages with E.164 numbers in the SCCP CDPA, it is assumed that no truncation occurred if and when the routing number was prepended and that SCCP CDPA has the full DN of the subscriber.
6. INP Message Relay to the EAGLE 5 ISS local subsystem is not supported.
7. Only the first 21 digits of the CDPA are decoded for INP Message Relay. For example, if the CDPA contains an RN prefixed to a DN, the RN is seven digits, and the DN is 15 digits, then the total is 22 digits, and the DN used for processing will be only 14 digits (21 total digits less 7 RN digits).
8. GTT currently handles decimal digits only. Thus, if an operator/country is using hexadecimal digits 'A' through 'F' in RNs and the operator is providing GTT to messages that have RN prefixes other than its own prefixes, the operator must enter the RN+DN number ranges as DN ranges in the INP/AINPQ database. The only problem with this is that the beginning and ending DNs can only be 15 digits, which may not be enough for an RN+DN.
9. If ported-in numbers use RN entity, replacing the CDPA GT with the entity address of a Signalling Point is not supported. There is at least one case where this is required: Subsequent GTT is desired, but the STP providing subsequent GTT does not have Number Portability capability.
10. If you choose to provision number normalization, INP/AINPQ always removes the specified prefix digits from the beginning of the DN before searching the database. Take care that the digit sequence of the specified prefix never matches the initial digit sequence of a valid DN. For example, if a valid DN without any special prefix is 5551234, then 55 should not be provisioned as a special prefix. If it were, INP/AINPQ would remove the first two digits from the DN, resulting in an invalid DN: 51234.

Other number normalization considerations include:

- INP and AINPQ features support up to forty special prefixes per node.
- Special prefixes may not exceed 15 digits. All configurations of the 15 digit prefix are valid; that is, any digit from '0' to 'F' in any sequence is valid for the prefix.
- An INP/AINPQ option (`cdpnpfx`, `chg-inpopts` command) lets an operator enter the prefix digits to be deleted from the Called Party Number or dialed digits before the database lookup.
- The operator can return either the complete Called Party Number or dialed digits in the response to the SSP including the special prefix, or the DN without the special prefix. Option `d1tpfx` is provisionable on a per-prefix basis. Up to 40 prefix-response combinations are supported.

- The operator can specify mappings from NAI to SNAI (Service NAI). Up to five mappings (for five unique NAI values) are supported. The only valid SNAI values are subscriber (`sub`), national (`nat1`), international (`intl`), and none (`none`, which is used to delete existing entries).
- INP/AINPQ searches for the specified prefix at the beginning of the DN:
  - If the beginning digits of the DN match the provisioned prefix, they are removed before conditioning the number to the international format.
- If NEC is provisioned, INP/AINPQ determines whether the NEC matches the beginning of the DN:
  - If the beginning digits of the DN match the NEC, they are removed before conditioning the number to the international format.
  - If the beginning digits of the DN do not match the provisioned prefix, the unchanged number is conditioned to the international format, which is used for the database search.
- If the Called Party Number NAI value received in the INP query matches a NAI value provisioned in the NAI to SNAI mapping table, the value of SNAI is used when conditioning the number to international format according to existing rules defined for INP.
- After the database search, the response to the SSP is constructed using either the complete number as received in the query (with special prefix), or just the DN (without a prefix). This handling of the prefix depends on the user's specification of various options during configuration, such as `dltpfx`, DRA, and Global Connect.

### Network Connections

Several customer- and Tekelec-installed private networks are required to support the INP/AINPQ feature. These networks are:

- Customer provisioning network
- EPAP sync network
- DSM networks
- Dial-up network

The following discussion is an overview of these private networks. It expands on the networks in the INP/AINPQ architecture diagram shown in Figure 2-1. (For details about configuring these networks, refer to the *EPAP User Interface Manual*.)

## Feature Description


### Customer Provisioning Network

The customer network carries the following traffic:

- Customer queries and responses to the PDB via the PDBI from the customer provisioning network
- Updates between PDBs of a mated EAGLE 5 ISS pair
- Updates between a PDB on one EAGLE 5 ISS and RTDBs on a mated EAGLE 5 ISS
- RTDB reload traffic if the active PDBA is not collocated on the same EPAP
- PDBA import/export (file transfer) traffic
- Traffic from a PDBA reloading from its mate
- EPAP and PDBA user interface traffic.

A typical customer network is shown in Figure 2-2.

**Figure 2-2.** Customer Provisioning Network

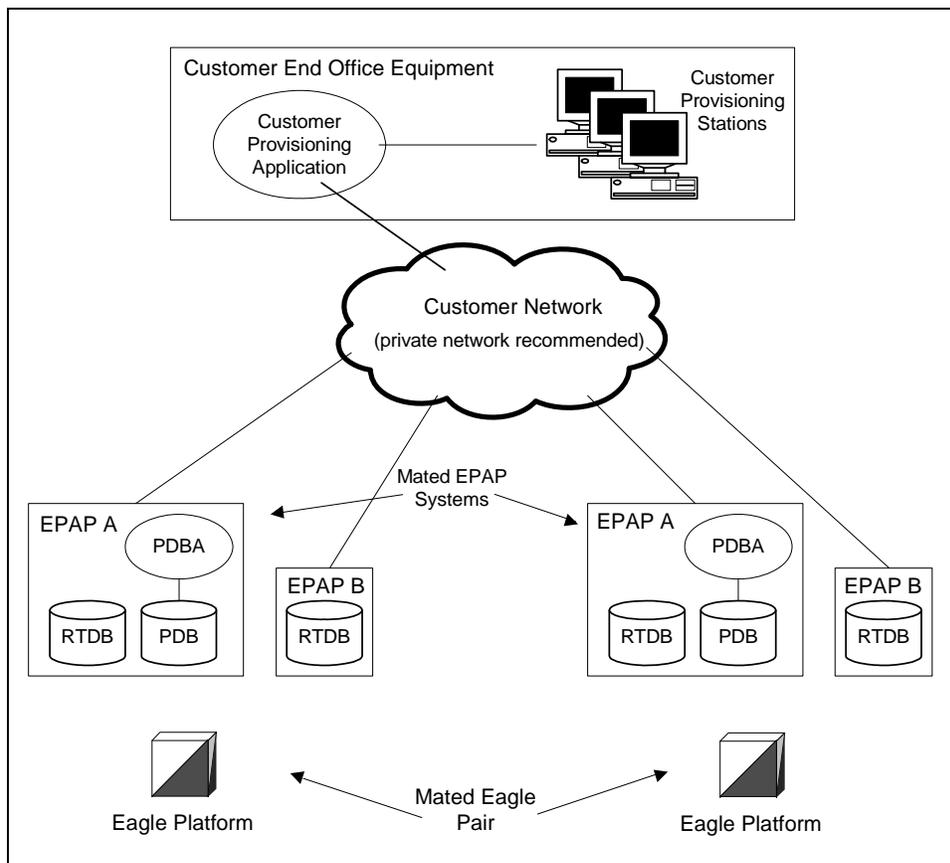


Although a dedicated network is recommended, it is possible that unrelated customer traffic can use the network as well. The determination either to have a dedicated network or to allow other customer traffic should be based on available external Ethernet bandwidth and network performance considerations.

### EPAP Sync Network

The EPAP sync network carries RTDB and maintenance application traffic between active and standby EPAP servers on an EPAP system. It synchronizes the contents of the RTDBs of both EPAP A and B. The EPAP network is a single Ethernet cable between EPAP A and EPAP B running at 100BASE-T, as shown in Figure 2-3.

**Figure 2-3.** EPAP Sync Network

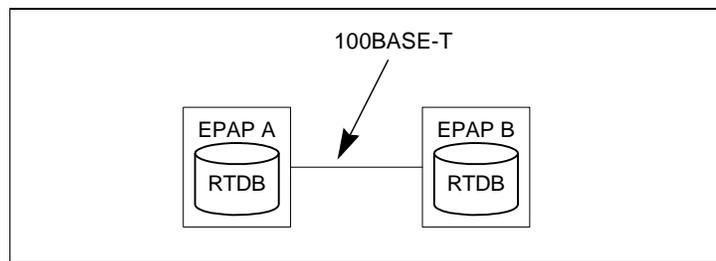


### DSM Networks

The DSM networks are shown in Figure 2-4. They carry provisioning data from the Real Time Data Bases (RTDBs) from the active EPAP to the DSM cards. They also carry reload and maintenance traffic to the DSMs.

The DSM networks consist of two Ethernet networks, which are the main DSM network running at 100BASE-T and the backup DSM network running at 10BASE-T. Both Ethernet networks connect EPAP A and EPAP B with every DSM card on a single EAGLE 5 ISS platform.

## Feature Description

**Figure 2-4.** DSM Networks

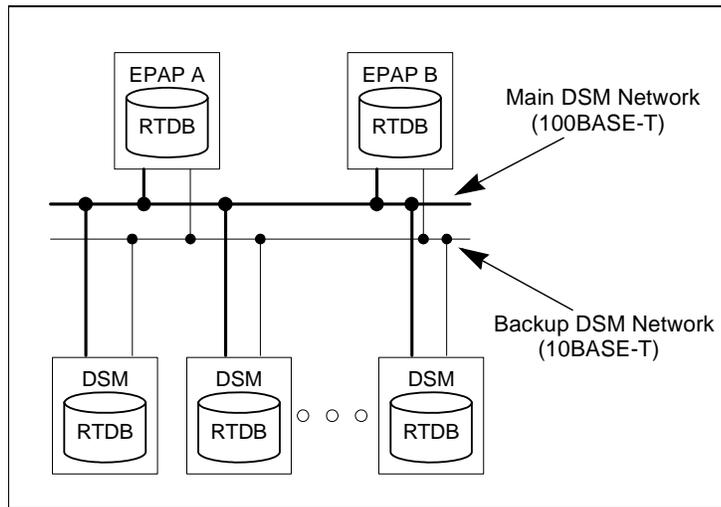

Maintenance information is sent from the active EPAP to an arbitrarily selected DSM card. The selected DSM is known as the primary DSM. Static information is exchanged across this interface at initialization, and dynamic information is exchanged on occasion.

While much of the traditional OAM provisioning and database functionality is implemented on the EPAP, the maintenance reporting mechanism is still the OAM.

The first and second octets of the EPAP network addresses for this network are 192.168. (The first two octets for private class C networks are defined in RFC 1597.)

The third octet is a customer specifiable for each DSM network. Be sure to select values that do not interfere with the customer's network addressing scheme.

The fourth octet of the address is specified as follows:

- If the EPAP is configured as “EPAP A”, the fourth octet has a value of 100.
- If the EPAP is configured as “EPAP B”, the fourth octet has a value of 200.

Table 2-1 summarizes the contents of each octet.


**Table 2-1.** EPAP IP Addresses in the DSM Network

Octet	Value
1	'192'
2	'168'
3	One customer-provisioned value for DSM network A, and another for DSM network B
4	'100' for EPAP A '200' for EPAP B

**Dial-Up PPP Network**

The dial-up PPP network, which is not illustrated in Figure 2-1, allows multiple user interface sessions to be established with the EPAP. The network connects a remote EPAP/PDBA user interface terminal with the EPAP in the EAGLE 5 ISS's MPS subsystem. The dial-up PPP network is illustrated in Figure 2-5.

**Figure 2-5.** Dial-up PPP Network

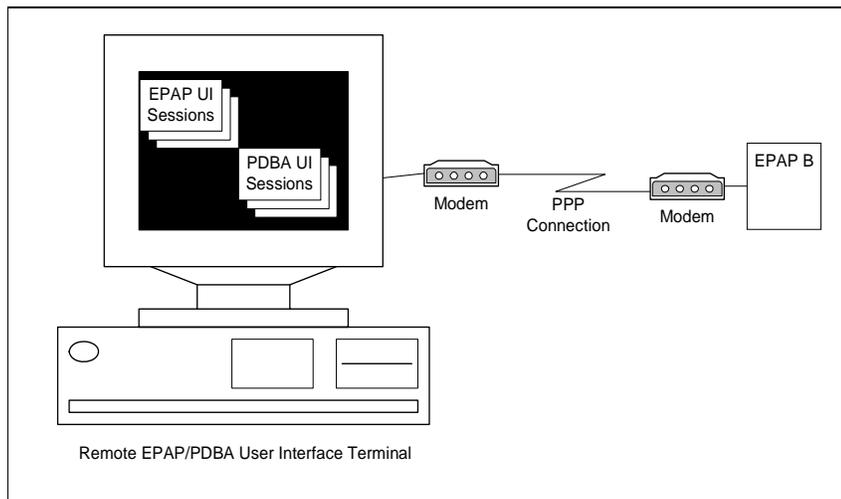

## Feature Description

### Serviceability Hints

#### Receiving INP/AINPQ Data from a National Database

The operator provisioning system (OPS) must address certain concerns when it gets its portability information from a national database.

1. Consider a two-step querying process where all but the recipient network uses a RN that identifies the recipient network and the recipient network itself uses a RN that identifies a particular exchange within its network. In this case, the data from the national database is the RN identifying the recipient network. If the operator is the recipient, its provisioning system must override the “national” RN with the “local” RN.
2. The translation from the national database associated with an RN is to the point of interconnection (POI) for the recipient network. The recipient network operator's provisioning system must override this translation with one that directs non-circuit related messages to the correct signalling point within its network. If this is not done, the result will be either message discard or circular routing.
3. The same problem as item 2 above occurs when the national database provides RNs and associated translations for non-ported numbers. The number range owner's provisioning system must do one of the following:
  - Override the translations to its POI with one that directs non-circuit related messages to the correct signaling points within its network, or
  - Remove the RNs and the associated translations, which activity causes the messages to use normal GTT, or
  - Replace the RN entities with SP entities when G-Flex is used.
4. When bulk loading the national database, the OPS must not wipe out any G-Flex data nor any data change done to solve the above issues.

#### Signaling Point (SP) Entity ID

Another issue for operators can be resolved by the operator provisioning system (OPS). When the user wants a MR translation for a DN that does not have an RN, an entity ID number for the signalling point must be provided to the PDB even if one is not normally assigned.

Use the OPS to generate a unique ID number for an SP entity when it is entered, and use that number when communicating with the PDB, but identify the entity to the OPS user via other methods. If a number is desired that does not require the use of the OPS to correlate to a specific entity, use the following rule of thumb: Use the PC (converted to a 5-digit decimal number) and SSN to identify the entity, since the PC and SSN, together, are guaranteed to be unique within a network.

This means that if an International PC is used, some method is required to set it off from the National PCs because it is a separate network. One way of doing this is to use an extra digit to specify the network. These examples show how to use a '1' to identify National PCs and '2' to identify International PCs:

- Intermediate GTT to another STP whose PCN = 2345 EntityID = 102345
- Final GTT to an SCP whose PCN = 2346 and SSN = 5 EntityID = 102346005
- Final GTT to a different service (SSN = 7) on the same SCP EntityID = 102346007
- Intermediate GTT to another STP whose PCI = 3-4-5 EntityID = 206181

### Mated Application Considerations

An EPAP-administered entity data can possibly become out-of-sync with the EAGLE 5 ISS mated application table because the creation of entity point codes (and/or subsystem numbers) in the mated application table is not performed at EPAP administration time.

If this mismatch is discovered at real time, a UIM message (such as "SCCP did not route - DPC not in MAP tbl" or "SCCP did not route - SS not in MAP tbl") is sent to the EAGLE 5 ISS maintenance terminal. This message means the MSU was discarded.

For this reason, it is recommended that the entity (SP or RN) not be administered until the entity PC (and/or SSN) has been entered into the EAGLE 5 ISS mated application (MAP) table.

### Entity Point Codes and Routes

Verification that an entity point code exists in the route table and has a route is not performed at database administration time. Therefore, it is possible for the EPAP entity data to be out-of-sync with the EAGLE 5 ISS route table.

If an out-of-sync condition is discovered at real time, a UIM is sent to the EAGLE 5 ISS maintenance terminal, indicating one of these conditions:

- Destination point code is not in the route table.
- Destination point code exists in the route table but is not assigned a route.
- Destination point code exists in the route table and has been assigned a route, but it is out of service.

For this reason, it is recommended that the entity not be administered until the entity PC (and/or SSN) has been entered into the EAGLE 5 ISS route table.

### Provisioning of Routing Number Prefix of the Node (HOMERN)

When the portability cluster uses RN prefixes for relayed messages, a message for a ported-in number arrives at the EAGLE 5 ISS with an RN prefixed to the DN in the CDPA. In this case, the RN is one of the RNs for the EAGLE 5 ISS operator's network.

Because the database contains only the DN, the following logic is performed to remove the RN before performing the database look-up:

- When the SNAI (from SRVSEL entry) for a message is RNSDN, RNNDN, or RNIDN, the EAGLE 5 ISS searches all Home RNs (HRNs) entered by the operator for a match with the same number of leading digits in the CDPA.
- If one or more matches are found, the match with the greatest number of digits is considered the HRN for that message. The CDPA digits matching the HRN are removed from the CDPA for database look-up purposes.
- If a matching HRN is not found, the entire string of the received digits (except for any ST digit on the end) is considered for the database look-up. If the database does not contain that entry, the database searching fails, resulting in the MSU being handled by GTT.

Because the correct removal of RN prefixes depends on the data entered by the operator, care must be used:

- First, all combinations of service selectors for incoming INP/AINPQ MR messages with RN prefixes should have the appropriate SNAI (RNSDN, RNNDN, or RNIDN).
- Second, all RNs to be removed should be entered by the HOMERN command.

Messages without an RN prefix can, in some cases, use the same selector values as messages with RN prefixes. If so, the SNAI must be set to RNxDN, but the leading CDPA digits of the non-prefix messages *must not match* any HOMERN entries. If the digits do match, that part of the DN is removed before database look-up, resulting in the database look-up failing to find the full DN.

### Provisioning the INP/AINPQ Number Normalization

When the MSC/SSP uses prefixed CDPN or DGTSDIAL in the queries, a message arrives at the INPQ with a prefixed CDPN number. The prefix in this case is (one of) the prefix(es) defined in the `chg-inpopts` commands.

The operator must take care because the correct removal of prefixes depends on the content of the data that is entered. All prefixes to be removed from the CDPN or DGTSDIAL are entered by the `chg-inpopts` command. It is possible that CDPNs or DGTSDIALs without a prefix can have the same first digits as the prefix digits. If the digits match, that portion of the DN would be removed before database look up, which situation would result in a failure of the database look-up finding the full DN. A similar situation could occur if NEC is provisioned and the digits match the NEC.

The following logic is performed to remove the prefix before doing a database look up.

- When any prefix(es) are provisioned in `chg-inpopts`, the decoded INAP CDPN or DGTSDIAL digits are compared with the list of provisioned prefixes.
- If a matching prefix is found, INP/AINPQ strips the prefix digits from the number.
- After the prefixes are compared, the digits are also compared to any provisioned NEC value. If the beginning digits match the NEC, INP/AINPQ strips the matching digits.
- If a matching prefix is not found, the entire string of the received digits, except for any ST digit on the end, is considered for the database look up without stripping the prefix.
- Number conditioning, if required, is applied after deleting the prefix and/or NEC.

### Provisioning the INP/AINPQ Service NAI

When the MSC/SSP uses one of the non-standard values for CDPN NAI or intends INP/AINPQ to treat a standard NAI value differently, the CDPN NAI is defined by the `cdpnnai` parameter in the `chg-inpopts` command with a corresponding service NAI (SNAI). If the CDPN NAI is not specified in the `chg-inpopts` command, SNAI is treated as national unless CDPN NAI is subscriber or international. INP/AINPQ performs any number conditioning based on the SNAI value and converts the CDPN digits to international number.

Since the correct use of `cdpnnai` depends on the data entered in `chg-inpopts` and in the EPAP database, the operator must exercise care in the entering data consistent with the features provisioned.

### Two UIMs for One MSU

An MSU that is invalid for INP/AINPQ MR, which consequently falls through to the GTT, may result in two UIMs being issued. For example, the first UIM results from the INP/AINPQ MR due to a number conditioning error. The second results from the GTT, due to a routing failure or a translation not provisioned for the GTAI.

In these cases, one UIM may not be issued because of frequency limiting. For example, the frequencies for a MR UIM and a PC Unavailable UIM are one message every 200 milliseconds. In the case of two problems with one MSU, the UIMs occur within microseconds of each other, so that one of the UIMs is not printed. It is the timing of UIMs with regard to any UIMs for other MSUs that

## Feature Description

determines which, if either, is printed. In the example, assuming no UIMs occurred in the previous 200 ms for any other MSUs, the INP/AINPQ MR is printed because it was generated first.

## INP/AINPQ Message Protocol

### Primary INP/AINPQ Functions

INP/AINPQ supports two TCAP protocols: INAP (for the INP feature) and ANSI-41 (for the AINPQ feature). The effective processing of the messages is the same for INAP and ANSI-41 protocols. INP and AINPQ provide the following main functions:

- *Message discrimination:* INP and AINPQ translate ported numbers, and consequently can differentiate between messages for INP or AINPQ or other services. Discrimination is performed via a service selector table where you can define the INP or AINPQ service for a combination of selectors. These selectors define whether INP Message Relay or INP/AINPQ Query is to be performed on an incoming message.
- *Number conditioning:* Because the subscriber database stores international DNs only, INP/AINPQ can condition incoming numbers to be international DNs by inserting a default CC and/or a default NDC for the database look up.
  - If the service is INPMR and SNAI is either a RNSDN or RNNDN or RNIDN, INP/AINPQ strips off the RN prefix if it matches the home network RN prefix and then conditions the number, if needed, before performing a database lookup.
  - If the service is INPQ and the message is destined to the INP/AINPQ subsystem, INP/AINPQ does the following:
    - Strips off CDPN or DGTSDIAL prefix if it matches the `cdpnfx` parameters defined in the `chg-inpopts` command
    - Strips off any digits that match the NEC, if NEC is provisioned
    - Then conditions, if needed, before performing a database lookup
- *INAP Connect Response:* INP Query Services generates a Connect response for an InitialDP message if the conditioned number is found in the subscriber database lookup. INP uses the routing number (RN) associated with the DN entry to build the Destination Routing Address number equal to RN only, RN+DN, CC+RN+DN, or RN+NEC+DN, based on the INPOPTS DRA parameter.
- *ANSI-41 Return Result with Routing Digits:* If the TCAP query is ANSI-41 protocol, AINPQ responds to the queries with Return Result message. This message has the Routing Digits encoded. If the conditioned number is found in the Database and the NE is RN, RN+DN, CC+RN+DN, or RN+NEC+DN,

and the Global Connect option is Continue, Return Result with Routing Digits message will be the response. If the Global Option is Connect and the number returned from the database has an NE assigned, a Return Result with routing digits is the response.

- *INAP Continue Response:* A Continue response is generated for an InitialDP message if the conditioned number is not found in the subscriber database lookup.
- *ANSI-41 Return Result without Routing Digits:* If the query is ANSI-41 protocol and the conditioned number is not found in the database, a Return Result without Routing Digits response is generated. If the conditioned number is found and NE is not assigned and Global Connect Option is set to Connect a Return Result without Routing Digits is generated. If the conditioned number is found in the database, the NE is SP or None and the Global Connect Option is set to Continue, this message is the response.
- *INP Message Relay:* INP performs Message Relay when a combination of service selectors (like domain (ITU or ANSI), Global Title Indicator (GTI), Translation Type (TT), Numbering Plan (NP), and Nature of Address Indicator (NAI)) indicate INP Message Relay is to be performed. If the translation data exists, INP Message Relay does one of the following:
  - Provides the ability to prefix the entity ID to the CDPA digits after deleting any home RN prefix, or
  - Replaces the CDPA digits with the RN prefix, or
  - Performs no change to the CDPA digits.

### The Stages of INP/AINPQ Execution

INP/AINPQ is performed in the following stages:

1. The message arrives at EAGLE 5 ISS *route-on-gt*. The SCCP portion is decoded; the data is used to perform the service selection, based on the CDPA GT fields other than ES and GTAI. The result of this selection identifies the set of translations to be used for INP/AINPQ and also specifies whether INP Message Relay or INP/AINPQ Query is to be performed on the message. If a selector does not match the incoming GT fields, then GTT is performed.
2. If stage 1 indicates INP/AINPQ is required and the message is not a UDTS (Unit Data Transfer Service) generated by EAGLE 5 ISS, the remaining SCCP portion is decoded. If INP/AINPQ Query is required, the TCAP and INAP portions are also decoded. If the message is a UDTS generated by the EAGLE 5 ISS, GTT is performed on the message.

## Feature Description

3. If the service indicator is INP Message Relay:
  - a. If SNAI is RNSDN or RNNDN or RNIDN, the leading digits of the DN number from the SCCP portion of the message are checked for the Home Routing Number (HOMERN), if any are provisioned. If found, INP/AINPQ strips off the HOMERN and condition the DN to be an international number.
  - b. The conditioned number's length is validated and the number is looked up in the subscriber database. First, the individual number database is searched. If the number is absent, the number range database is searched.
  - c. If the number is found, the EAGLE 5 ISS uses the Message Relay GT information from the associated entity and prefixes the entity ID to the DN if specified or, based on the option, can replace the CDPA digits with the entity ID or leave the DN unchanged. If no entity is associated with the DN or if the entity does not have translation (MR) data, the GTT is performed on the message.
  - d. If no match is found for the conditioned number in the subscriber database, GTT is performed on this message.
  - e. If the DPC in the translation data is the EAGLE 5 ISS's Point Code or is for a different domain than the message (i.e., ANSI vs. ITU or ITU vs. ANSI), a UDTS is sent and the processing stops here.
4. If the service indicator is INP Query,
  - a. Two types of messages are allowed: messages with InitialDP as the INAP op-code and ANSI-41 messages with NPREQ op-code. During decoding, INP/AINPQ identifies whether the tcap-type is ANSI-41 or INAP from the package type field (second byte) of the TCAP portion of the message.
  - b. If the INAP op-code is InitialDP, INP decodes the CDPN parameter and performs number conditioning to convert the INAP CDPN to an international number. This operation is performed in these steps:
    1. Leading digits of the CDPN number from the INAP portion of the message are checked for the prefixes (cdpnpfx), if any are provisioned. If any are found, INP strips the prefix from the CDPN digits.
    2. Remove if the stop digits are present in the Dialed Digits.
    3. If NEC is provisioned and NEC is present in the Dialed Digits, strip the NEC off.
    4. After removing cdpnpfx, ST Digits, and NEC, INP maps the CDPN NAI to the Service NAI by doing a lookup in the INPOPTS table. If the

CDPN NAI is entered in the INPOPTS table, its corresponding SNAI value is used for number conditioning. Otherwise, INP treats the number as national (*nat1*), unless the NAI field in the CDPN is subscriber (*sub*) or international (*int1*).

- c. If the ANSI-41 OPcode is NPREQ, AINPQ decodes the Dialed Digits number and performs number conditioning to convert the Dialed Digits to an international number. As in the case of INAP:
  1. The leading digits of the Dialed Digits from the TCAP portion of the message are checked for the prefixes (*cdpnpfx*), if any are provisioned. If found, the *cdpnpfx* is stripped off from the Dialed Digits.
  2. Remove if the stop digits are present in the Dialed digits.
  3. If NEC is provisioned and NEC is present in the Dialed Digits, strip the NEC off.
  4. After removing the *cdpnpfx*, ST DIGITS and NEC from the Dialed digits, NAI is mapped into Service NAI of the INPOPTS table, and corresponding SNAI value is used for number conditioning. If mapping is not found, AINPQ treats the number as National, if the NAI field of Dialed Digits is Subscriber or International.
5. The conditioned number's length is validated, and the number is looked up in the subscriber database.
6. The response depends on the implemented feature (INP or AINPQ), the Global Connect option specified in the *chg-inpopts* command (*connect* or *continue*), and on the result type of the query of the NPDB (RN or SP), as follows:
  - A “Connect” message (for the INP feature) or a “Return Result with Digits” message (for the AINPQ feature) is sent in the following cases:
    - The NPDB query result type is RN (in this case, the Global Connect option does not matter)
    - The NPDB query result type is SP and the Global Connect option is specified as *connect*

In either case, the Destination Routing Address of the message contains RN, RN+DN, CC+RN+DN or RN+NEC+DN, depending on the value of the DRA field specified in the *chg-inpopts* command.

## Feature Description

- A “Continue” message (for the INP feature) or a “Return Result without Digits” message (for the AINPQ feature) is sent in the following cases:
  - The NPDB query result type is SP and the Global Connect option is specified as *continue*
  - The NPDB query result returns a Not Found (in this case, the Global Connect option does not matter)



# INP/AINPQ Commands

Introduction.....	3-1
EAGLE 5 ISS Commands for INP/AINPQ.....	3-1
System Debug Services (SDS) Commands.....	3-17

## Introduction

This chapter describes the EAGLE 5 ISS Commands used for maintenance, measurement, and administration of the INP and AINPQ features. EAGLE 5 ISS INP/AINPQ commands provide for the provisioning, operations, and maintenance activities of the EAGLE 5 ISS DSM cards and associated network connections.

## EAGLE 5 ISS Commands for INP/AINPQ

This section provides a description of the user interface for maintenance, operation, and measurement commands for the INP/AINPQ feature. The commands that follow allow provisioning, operations, and maintenance activities for DSM cards.

Complete descriptions of these commands are shown in detail in the *Commands Manual*, including parameter names, valid values, and output examples for the commands.

## Commands

The command examples shown illustrate the requirements and provide suggestions for suitable names and output. The commands are described in detail in the *Commands Manual*, where the actual parameter names, valid values, and output for the commands are provided.

Commands described in this section include:

- chg-ctrl-feat / enable-ctrl-feat / rtrv-ctrl-feat
- chg-stpopts / rtrv-stpopts
- ent-srvsel / dlt-srvsel / chg-srvsel / rtrv-srvsel
- ent-homern / dlt-homern / rtrv-homern
- chg-sid / rtrv-sid
- rept-stat-sys
- rept-stat-sccp
- rept-stat-mps
- rept-stat-card
- rept-meas
- chg-measopts
- rept-stat-meas
- rept-ftp-meas
- rtrv-measopts
- rept-stat-trbl
- rept-stat-alm
- rept-stat-db
- inh-card / alw-card
- ent-card / rtrv-card / dlt-card
- ent-map / dlt-map / chg-map / rtrv-map
- alw-map-ss / inh-map-ss
- ent-ss-appl / chg-ss-appl / dlt-ss-appl / rtrv-ss-appl
- chg-gpl / act-gpl / rtrv-gpl / rept-stat-gpl / copy-gpl
- ent-cspc / dlt-cspc / rtrv-cspc
- chg-inpopts / rtrv-inpopts
- inh-alm / unhb-alm
- chg-ip-card / rtrv-ip-card
- chg-ip-lnk / rtrv-ip-lnk
- ent-ip-host / dlt-ip-host / rtrv-ip-host

- pass, including ping, netstat, nslookup, arp, and help commands

**chg-ctrl-feat / enable-ctrl-feat / rtrv-ctrl-feat**

The **chg-ctrl-feat** command is used with the controlled features of the EAGLE 5 ISS that have been purchased and enabled with the **enable-ctrl-feat** command.

Although the **chg-ctrl-feat** command can be used for some feature types to turn those features on or off, the INP and AINPQ features are feature types that can only be permanently turned on. After the INP and AINPQ features have been turned on using the **chg-ctrl-feat** command, they are permanently on and cannot be turned off.

The **enable-ctrl-feat** command is used to enable a controlled feature of the EAGLE 5 ISS.

The **rtrv-ctrl-feat** command is used to retrieve the status of features that are controlled by feature access keys. The following example shows an example of the output from the **rtrv-ctrl-feat** command for an EAGLE 5 ISS in which both the INP and AINPQ features have been enabled.

- **rtrv-ctrl-feat**

```

rlghncxa03w 06-11-24 16:40:40 EST  EAGLE5 36.0.0
The following features have been permanently enabled:
Feature Name                Partnum    Status  Quantity
IPGWx Signaling TPS         893012805  on      2000
HC-MIM SLk Capacity         893012707  on       64
ISUP Normalization          893000201  on      ----
Command Class Management    893005801  on      ----
LNP Short Message Service    893006601  on      ----
Prepaid SMS Intercept Ph1    893006701  on      ----
Intermed GTT Load Sharing    893006901  on      ----
G-Port Circ Route Prevent    893007001  on      ----
XGTT Table Expansion         893006101  on     400000
XMAP Table Expansion         893007710  on       3000
Large System # Links         893005910  on       2000
Routesets                    893006403  on       8000
EAGLE5 Product               893007101  on      ----
EAGLE Product                893007201  off     ----
IP7 Product                  893007301  off     ----
Network Security Enhance     893009101  off     ----
Telnet                       893005701  on      ----
Port Chk for MO SMS          893009301  on      ----
LNP ELAP Configuration       893010901  on      ----
LNP ported TNs               893011023  on    228000000
LNP ported LRNs              893010501  on     150000
LNP ported NPANXXs          893009402  on     300000
15 Minute Measurements       893012101  off     ----
EIR                           893012301  on      ----
EAGLE OA&M IP Security        893400001  off     ----
SCCP Conversion              893012001  on      ----
SE-HSL SLK Capacity          893013005  on       64
GSM Map Screening (GMS)      893013201  on      ----

```

```

Enhanced GMS (EGMS)      893012401  on      ----
MTP MAP Screening        893013501  on      ----
Spare Point Code Support 893013601  on      ----
GSM MAP SRI Redirect     893014001  on      ----
ISUP NP with EPAP        893013801  on      ----
GPort SRI Query for PP   893017701  off     ----
Origin-Based MTP Routing 893014201  on      ----
Prepaid IDP Query Relay  893016001  on      ----
IDP Screening for Prepaid 893015501  on      ----
Flexible GTT Load-Sharing 893015401  on      ----
Origin Based SCCP Routing 893014301  on      ----
INP                      893017901  on      ----
ANSI-41 INP Query       893017801  on      ----
;

```

The following features have been temporarily enabled:

Feature Name	Partnum	Status	Quantity	Trial Period Left
G-Port Circ Route Prevent	893007001	On	---	20 days 8 hrs 57 mins

The following features have expired temporary keys:

Feature Name	Part Num
OnOffFeatV	

;

For further details on using these commands, refer to the *Commands Manual*.

### chg-stpopts / rtrv-stpopts

The STP system options commands (**stpopts**) change and display STP wide options in the EAGLE 5 ISS database. It has two variations, each of which is described in the following: **chg-stpopts** and **rtrv-stpopts**.

The **chg-stpopts** command changes STP system options in the database. This command updates the STPOPTS table. The **defcc** and **defndc** parameters are used to convert non-international numbers received in the MSU to an international number. The parameters can only be changed if the G-Flex feature bit is ON or the G-Port, INP, or AINPQ features have been enabled.

The **chg-stpopts** command is also used to configure the EAGLE 5 ISS to send:

- The Connect or Continue message when an IDP message is received for INP service
- The Return Result with Routing Digits or Return Result without Routing Digits message when an IDP message is received for AINPQ service

The **rtrv-stpopts** command is used to retrieve all STP options from the database. This command updates the STPOPTS table. The **defcc** and **defndc** parameters are the additional options displayed when the G-Flex feature bit is ON or the G-Port, INP, or AINPQ features have been enabled.

For further details on using these commands, refer to the *Commands Manual*.

### **ent-srvsel / dlt-srvsel / chg-srvsel / rtrv-srvsel**

The INP/AINPQ service selector (**srvsel**) commands are used to provision new selectors for the INP/AINPQ service, providing greater flexibility when provisioning the type of messages that require INP/AINPQ processing. There are four variants, each of which is described in the following sections: **ent-srvsel**, **chg-srvsel**, **dlt-srvsel**, and **rtrv-srvsel**. For further details on the EAGLE 5 ISS INP/AINPQ service selector commands (such as command rules and output format), refer to the *Commands Manual*.

### **ent-homern / dlt-homern / rtrv-homern**

These commands allow you to provision, remove, and report on the up-to-100 routing number prefixes for the operating network in the HOMERN table. Refer to the *Commands Manual* for details of these commands.

### **chg-sid / rtrv-sid**

These commands are used to change and report on the self-identification of the EAGLE 5 ISS. The self-identification identifies the EAGLE 5 ISS to other signaling points in the network. Refer to the *Commands Manual* for details of these commands.

### **rept-stat-sys**

The **rept-stat-sys** command is used to determine the location of troubles in the system. The display shows the number of these items that are in service (IS-NR) and how many are in another state (IS-ANR, OOS-MT, OOS-MT-DSBLD).

### **rept-stat-sccp**

This command is used to display the status of the SCCP and VSCCP cards and the GTT (Global Title Translation), G-Flex (GSM Flexible Numbering), G-Port (GSM Mobile Number Portability), A-Port (ANSI Mobile Number Portability), INP (INAP-based Number Portability), AINPQ (ANSI-41 INP Query), and EIR (Equipment Identity Register) services executing on those cards. This command also displays any cards that are denied SCCP service.

Here are two sample commands and their outputs.

- **rept-stat-sccp**

Command entered at terminal #3.

;

```
tekelecstp 06-11-24 13:34:22 EST EAGLE 36.0.0 -30.10.0
  SCCP SUBSYSTEM REPORT IS-NR      Active      -----
  GSM  SUBSYSTEM REPORT IS-NR      Active      -----

  SCCP Cards Configured= 4  Cards IS-NR= 2  Capacity Threshold = 100%
```

## INP/ANIPQ Commands

CARD	VERSION	PST	SST	AST	MSU USAGE	CPU USAGE
1212	101-001-000	IS-NR	Active	ALMINH	45%	30%
1301	101-001-000	IS-NR	Active	-----	35%	20%
1305	-----	OOS-MT	Isolated	-----	0%	0%
2112	-----	OOS-MT-DSBLD	Manual	-----	0%	0%

-----  
 SCCP Service Average MSU Capacity = 40%                      Average CPU Capacity = 25%

AVERAGE CPU USAGE PER SERVICE:

GTT = 15%    GPORT = 5%    GPORT = 10%  
 INPMR = 2%    INPQS = 3%

TOTAL SERVICE STATISTICS:

SERVICE	SUCCESS	ERRORS	WARNINGS	FORWARD TO GTT	TOTAL
GTT:	1995	5	-	-	2000
GFLEX:	500	1	4	10	515
GPORT:	800	0	2	3	800
INPMR:	50	5	1	15	70
INPQS:	499	1	-	-	500

Command Completed.

;

- **rept-stat-sccp:loc=1106**

Command entered at terminal #4.

;

```
tekelecstp 06-11-24 13:34:22 EST EAGLE 36.0.0 -33.10.0
CARD VERSION TYPE PST SST AST
1106 103-010-000 DSM IS-NR Active -----
```

ALARM STATUS = No Alarms.

GTT: STATUS = ACT            MSU USAGE = 10%  
 GFLEX: STATUS = ACT        MSU USAGE = 10%  
 GPORT: STATUS = ACT        MSU USAGE = 10%  
 INPMR: STATUS = ACT        MSU USAGE = 13%  
 INPQS: STATUS = ACT        MSU USAGE = 20%

CPU USAGE = 15%

CARD SERVICE STATISTICS:

SERVICE	SUCCESS	ERRORS	WARNINGS	FORWARD TO GTT	TOTAL
GTT:	1995	5	-	-	2000
GFLEX:	500	1	4	10	515
GPORT:	500	1	4	10	515
INPMR:	50	2	3	15	70
INPQS:	499	1	-	-	500

Command Completed.

;

## INP/ANIPQ Commands

### **rept-stat-mps**

This command is used to display the overall status of the application running on the MPS (multi-purpose server).

- If the LNP ELAP Configuration feature is turned on, the status of the ELAP (EAGLE LNP Application Processor) subsystem is displayed.

**NOTE: The LNP feature cannot be enabled in the same EAGLE 5 ISS where an INP or AINPQ feature is enabled.**

- If the INP (INAP number portability) feature is turned on, the status of the EPAP (EAGLE Provisioning Application Processor) subsystem is displayed.
- If the AINPQ (ANSI-41 INP Query) feature is turned on, the status of the EPAP (EAGLE Provisioning Application Processor) subsystem is displayed.
- If the G-Port (GSM mobile number portability) feature or G-Flex (GSM flexible numbering) feature is turned on, the status of the GSM (Global System for Mobile Telecommunications) and the EPAP (EAGLE Provisioning Application Processor) is displayed.
- If the EIR (Equipment Identity Register) feature is enabled and turned on, the status of the EIR component on the card is displayed.

A sample command and the associated output follows:

- **rept-stat-mps**  
Command entered at terminal #4.

```

rlghncxa03w 06-11-24 10:23:93 EST EAGLE 36.0.0
          VERSION      PST          SST          AST
EPAP A          027-015-000  IS-NR        Active       -----
  CRITICAL PLATFORM  ALARM DATA = No Alarms
  MAJOR   PLATFORM   ALARM DATA = No Alarms
  MINOR   PLATFORM   ALARM DATA = No Alarms
  CRITICAL APPLICATION ALARM DATA = No Alarms
  MAJOR   APPLICATION ALARM DATA = No Alarms
  MINOR   APPLICATION ALARM DATA = No Alarms
          ALARM STATUS = No Alarms

          VERSION      PST          SST          AST
EPAP B          027-015-000  IS-NR        Standby     -----
  CRITICAL PLATFORM  ALARM DATA = No Alarms
  MAJOR   PLATFORM   ALARM DATA = No Alarms
  MINOR   PLATFORM   ALARM DATA = No Alarms
  CRITICAL APPLICATION ALARM DATA = No Alarms
  MAJOR   APPLICATION ALARM DATA = No Alarms
  MINOR   APPLICATION ALARM DATA = No Alarms
          ALARM STATUS = No Alarms

CARD  PST          SST          INP STAT
1106 P IS-NR        Active       ACT
1201  IS-ANR        Active       SWDL
1205  OOS-MT-DSBLD Manual       -----
1302  OOS-MT        Isolated    -----
1310  IS-ANR        Standby     SWDL

CARD 1106 ALARM STATUS = No Alarms
  DSM PORT A:          ALARM STATUS          = No Alarms
  DSM PORT B:          ALARM STATUS          = No Alarms
CARD 1201 ALARM STATUS = No Alarms
  DSM PORT A:          ALARM STATUS          = ** 0084 IP Connection Unavailable
  DSM PORT B:          ALARM STATUS          = ** 0084 IP Connection Unavailable
CARD 1205 ALARM STATUS = No Alarms
  DSM PORT A:          ALARM STATUS          = ** 0084 IP Connection Unavailable
  DSM PORT B:          ALARM STATUS          = ** 0084 IP Connection Unavailable
CARD 1302 ALARM STATUS = ** 0013 Card is isolated from the system
  DSM PORT A:          ALARM STATUS          = ** 0084 IP Connection Unavailable
  DSM PORT B:          ALARM STATUS          = ** 0084 IP Connection Unavailable
CARD 1310 ALARM STATUS = No Alarms
  DSM PORT A:          ALARM STATUS          = ** 0084 IP Connection Unavailable
  DSM PORT B:          ALARM STATUS          = ** 0084 IP Connection Unavailable

```

```

Command Completed.
;

```

### rept-stat-card

The **rept-stat-card** command is used to display the status of the card and maintenance activity.

The output of the **rept-stat-card** command includes the card location, GPL version being used by the card, device type, device primary state, device secondary state, and device associated state. Refer to the *Commands Manual* for details of this command.

### **rept-meas**

This command is used to generate measurement reports on demand. The reports display on the UI terminal, and are not transferred to the customer FTP server when the Measurements Platform feature is enabled. Refer to the *Commands Manual* for details of this command.

### **chg-measopts**

Used to enable or disable the automatic generation and FTP transfer of scheduled measurement reports to the FTP server. Refer to the *Commands Manual* for details of this command.

### **rept-stat-meas**

Reports the status of the measurements subsystem including card location and state, Alarm level, and Subsystem State. Refer to the *Commands Manual* for details of this command.

### **rept-ftp-meas**

Manually initiates generation and FTP transfer of a measurements report from the MCPM to the FTP server. Refer to the *Commands Manual* for details of this command.

### **rtrv-measopts**

Generates a user interface display showing the enabled/disabled status of all FTP scheduled reports. Refer to the *Commands Manual* for details of this command.

### **rept-stat-trbl**

This command is used to display a summary report of all the device trouble notifications that are logged currently in the RAM storage area of the OAM. This command includes the INP/AINPQ subsystem and DSM/EPAP IP link alarms. Refer to the *Commands Manual* for details of this command. Here is an example of the command and output.

### **rept-stat-trbl**

```
Command Accepted - Processing
  eagle10605 06-11-24 14:34:08 EST  EAGLE 36.0.0
  rept-stat-trbl
  Command entered at terminal #10.
;
  eagle10605 99-06-24 14:34:08 EST  EAGLE 36.0.0
  Searching devices for alarms...
;
```

```

eagle10605 06-11-24 14:34:09 EST EAGLE 36.0.0
SEQN UAM AL DEVICE ELEMENT TROUBLE TEXT
0002.0143 * CARD 1113 OAM System release GPL(s) not approved
0011.0176 * SECULOG 1116 Stdby security log -- upload required
3540.0203 ** SLK 1201,A lsn1 REPT-LKF: lost data
3541.0203 ** SLK 1201,B lsn4 REPT-LKF: lost data
3542.0203 ** SLK 1202,A lsn2 REPT-LKF: lost data
3544.0202 ** SLK 1203,A lsn3 REPT-LKF: HWP - too many link interrupts
0021.0318 ** LSN lsn1 REPT-LKSTO: link set prohibited
0022.0318 ** LSN lsn2 REPT-LKSTO: link set prohibited
0023.0318 ** LSN lsn3 REPT-LKSTO: link set prohibited
0010.0318 ** LSN lsn4 REPT-LKSTO: link set prohibited
3537.0084 ** DSM A 1215 IP Connection Unavailable
3536.0084 ** EPAP B 7100 IP Connection Unavailable
0003.0313 *C DPC 010-010-003 DPC is prohibited
0004.0313 *C DPC 010-010-004 DPC is prohibited
0005.0313 *C DPC 010-010-005 DPC is prohibited
0028.0313 *C DPC 252-010-001 DPC is prohibited
0006.0313 *C DPC 252-010-003 DPC is prohibited
0008.0313 *C DPC 252-010-004 DPC is prohibited
0009.0313 *C DPC 252-011-* DPC is prohibited
0029.0308 *C SYSTEM Node isolated due to SLK failures
Command Completed.
;

```

### rept-stat-alm

This command is used to provide status of all alarms. This includes the alarm totals of the INP/AINPQ subsystem and DSM/EPAP IP links. Refer to the *Commands Manual* for details of this command. Here is an example of the command and output.

### rept-stat-alm

Command Accepted - Processing

```

eagle10605 06-11-24 23:59:39 EST EAGLE 36.0.0
rept-stat-alm
Command entered at terminal #10.
;

eagle10605 06-11-24 23:59:39 EST EAGLE 36.0.0
ALARM TRANSFER= RMC
ALARM MODE CRIT= AUDIBLE MAJR= AUDIBLE MINR= AUDIBLE
ALARM FRAME 1 CRIT= 9 MAJR= 12 MINR= 2
ALARM FRAME 2 CRIT= 0 MAJR= 0 MINR= 0
ALARM FRAME 3 CRIT= 0 MAJR= 0 MINR= 0
ALARM FRAME 4 CRIT= 0 MAJR= 0 MINR= 0
ALARM FRAME 5 CRIT= 0 MAJR= 0 MINR= 0
ALARM FRAME 6 CRIT= 0 MAJR= 0 MINR= 0
ALARM FRAME GPF CRIT= 1 MAJR= 2 MINR= 1
PERM. INH. ALARMS CRIT= 0 MAJR= 0 MINR= 0
TEMP. INH. ALARMS CRIT= 0 MAJR= 0 MINR= 0
ACTIVE ALARMS CRIT= 10 MAJR= 14 MINR= 3
TOTAL ALARMS CRIT= 10 MAJR= 14 MINR= 3
Command Completed.
;

```

### **rept-stat-db**

This command displays both EAGLE 5 ISS and INP/AINPQ database status and level information for each DSM network card, and for the active and standby EPAP databases. It reports database exception status such as corrupted, incoherent, or inconsistent, as well as providing the birthdates and levels. For details about this command, refer to the *Commands Manual*.

### **inh-card / alw-card**

The *inh-card* command is used to change the state of the card from in-service normal (IS-NR) to Out-of-Service Maintenance-Disabled (OOS-MT-DSBLD). A craftsperson then can test the DCM/LIM/ACM/ASM/DSM/GPSM-II/MIM card or physically remove it from the shelf.

The *alw-card* command is used to change the card from OOS-MT-DSBLD (out-of-service maintenance-disabled) to IS-NR (in-service normal) if the loading is successful.

Refer to the *Commands Manual* for details of these commands.

### **ent-card / rtrv-card / dlt-card**

The *ent-card* command is used to add a card to the database. The card type and application specifies the function assigned to the card.

The *rtrv-card* command is used to display the information about a card. This command displays the card type, the application the card is running, the linkset name, the signaling link code, and the ports.

The *dlt-card* command is used to remove a card entry from the system database.

Refer to the *Commands Manual* for details on using these commands.

### **ent-map / dlt-map / chg-map / rtrv-map**

These commands are used to provision, remove, change, and report on the mate point code and subsystem number and its attributes. A mate point code defines an adjacent signaling point, which is considered the mated signal transfer point (STP) to the EAGLE 5 ISS. Refer to the *Commands Manual* for details of these commands.

### **alw-map-ss / inh-map-ss**

The *alw-map-ss* command is used to allow the INP/AINPQ subsystem which brings the subsystem back on-line. The command is rejected if the subsystem specified with the SSN parameter is not the INP/AINPQ subsystem. The current state of the INPQS or EIR subsystem must be OOS-MT-DSBLD (out of service maintenance disabled) in order for the command to be accepted.

When the *inh-map-ss* is entered for the INP/AINPQ subsystem, a coordinated shutdown is attempted. If the coordinated shutdown fails, a UIM is output indicating the shutdown failed. If the FORCE parameter is specified, the specified subsystem is forced to shutdown. A coordinated shutdown is not performed.

Refer to the *Commands Manual* for details of these commands.

### **ent-ss-appl / chg-ss-appl / dlt-ss-appl / rtrv-ss-appl**

These commands are used to provision, remove, change, and report on the entry of a subsystem number for an application and set the application status online or offline. Only one subsystem can be defined per application, and the application must be unique. This command adds new subsystem application value for INP/AINPQ.

Refer to the *Commands Manual* for details of these commands.

### **chg-gpl / act-gpl / rtrv-gpl / rept-stat-gpl / copy-gpl**

The *chg-gpl* command is used to copy a generic program load from the source disk to the destination disk (both active and standby disks). The new GPL becomes the trial version on each of the destination disks. This command also copies the system release table to the fixed disks.

The *act-gpl* command is used to change the status of the trial GPL from “trial” to “approved.” The status of the previously approved GPL is changed to “trial.”

The *rtrv-gpl* command is used to show the version numbers of the GPLs stored on each fixed disk (TDM) or removable cartridge (MDAL, if available) and the system release table stored on each fixed disk.

The *rept-stat-gpl* command is used to display the version of GPLs currently running for an application, plus the approved and trial versions of the GPL that will run if the card is restarted.

The *copy-gpl* command is used to copy all approved GPLs from one drive to another. The GPLs can be copied only from the fixed disk on the active TDM to the removable cartridge, or from the removable cartridge to the fixed disk on the standby TDM.

Refer to the *Commands Manual* for details of these commands.

Here are samples of the reports produced by these commands.

```
chg-gpl:appl=vsccp:ver=101-3-0
```

```
Command entered at terminal #3.
;
tekelecstp 06-11-24 06:54:39 EST EAGLE 36.0.0
VSSCP upload to 1114 completed
VSSCP upload to 1116 completed
;
```

## INP/ANIPQ Commands

### **act-gpl:appl=vsccp:ver=101-3-0**

```
Command entered at terminal #3.
;
tekelecstp 06-11-24 06:54:39 EST EAGLE 36.0.0
VSSCP activate on 1114 completed
VSSCP activate on 1116 completed
;
```

### **rtrv-gpl:appl=vsccp**

```
Command entered at terminal #3.
;
tekelecstp 06-11-24 07:01:08 EST EAGLE 36.0.0
GPL Auditing ON

APPL CARD RELEASE APPROVED TRIAL REMOVE TRIAL
VSSCP 1114 101-001-000 101-003-000 101-001-000 101-003-000
VSSCP 1116 101-001-000 101-003-000 101-003-000 -----
;
```

### **rept-stat-gpl:appl=vsccp**

```
Command entered at terminal #3.
;
tekelecstp 06-11-24 12:55:50 EST EAGLE 36.0.0
APPL CARD RUNNING APPROVED TRIAL
VSSCP 1205 101-003-000 ALM 101-003-000 101-003-000
VSSCP 1211 101-001-000 ALM+ 101-003-000 -----
Command Completed.
;
```

### **ent-cspc / dlt-cspc / rtrv-cspc**

These commands are used to provision, remove, and report on the broadcast concerned signaling point code groups. These point codes are notified of the receipt by EAGLE 5 ISS of subsystem-prohibited and subsystem-allowed SS7 SCCP management messages from an application at an adjacent signaling point and subsystem. Refer to the *Commands Manual* for details of these commands.

### **chg-inpopts / rtrv-inpopts**

These commands are used to change and report on the INP/AINPQ specific data. These commands provision and report on the contents of the INPOPTS table. Refer to the *Commands Manual* for details of these commands.

### **inh-alm / unhb-alm**

The *inh-alm* command is used inhibit the reporting of alarms for the given device. Inhibited alarms will not generate unsolicited output or cause alarm indicators to be turned on. All *rept-stat-xxx* commands continue to display the alarm with an indication that the device has its alarms inhibited.

The *unhb-alm* command is used to restore the reporting of alarms for the given device.

Refer to the *Commands Manual* for details of using these commands.

### **chg-ip-card / rtrv-ip-card**

The *chg-ip-card* command is used to provision the Internet Protocol networking parameters for any given DSM card.

The *rtrv-ip-card* command is used to report on the Internet Protocol networking parameters for any given DSM card.

Refer to the *Commands Manual* for details of these commands.

### **chg-ip-lnk / rtrv-ip-lnk**

The *chg-ip-lnk* command is used to provision the Internet Protocol link table.

The *rtrv-ip-lnk* command is used to report on the Internet Protocol link table.

Refer to the *Commands Manual* for details of these commands.

### **ent-ip-host / dlt-ip-host / rtrv-ip-host**

These commands are used to provision, remove, and report on the entries in the Internet Protocol host table. The IP host table defines local and remote host names for IP addresses.

Refer to the *Commands Manual* for details of these commands.

### **pass**

The *pass* command allows remote execution of a selected command by the targeted card. (These commands recognize the DSM boards.) Selected commands are allowed as follows.

- `pass:cmd="ping"`
- `pass:cmd="netstat"`
- `pass:cmd="nslookup"`
- `pass:cmd="arp"`
- `pass:cmd="help"`

For this feature, the *loc* parameter must be a VSCCP card location. For other details of the *pass* command, refer to *Commands Manual*.

## INP/ANIPQ Commands

### **pass: cmd="Ping"**

The 'ping' **pass** command supports troubleshooting of the private EPAP/DSM IP network. The following example demonstrates typical usage.

```
eagle10506 06-12-11 08:43:45 EST EAGLE 36.0.0

pass:loc=1215:cmd="ping -h"
Command entered at terminal #2.
;

eagle10506 06-12-11 08:43:45 EST EAGLE 36.0.0
PASS: Command sent to card
;

eagle10506 06-12-11 08:43:45 EST EAGLE 36.0.0

Usage: ping <hostname | ipaddr> [-h] [-i size] [-n count]
Options:
-h          Displays this message
-i count   Number of pings to send. Range=1..5. Default=3.
-n size    Sets size of ICMP echo packet. Range=12..2048. Default=64.
hostname   Name of machine to ping
ipaddr     IP Address of machine to ping (d.d.d.d)
;
```

### **pass:cmd="netstat"**

The 'netstat' **pass** command supports troubleshooting of network interface and routing configuration problems within the private EPAP/DSM IP network.

The following examples demonstrate typical usage.

```
eagle10506 06-12-11 08:43:00 EST EAGLE 36.0.0

pass:loc=1215:cmd="netstat -h"

Command entered at terminal #2.
;

eagle10506 06-12-11 08:43:00 EST EAGLE 36.0.0

PASS: Command sent to card
;

eagle10506 06-12-11 08:43:00 EST EAGLE 36.0.0

Usage: netstat [-a] [-i] [-h] [-m data|sys|dd] [-p icmp|ip|tcp|udp] [-r]
Options:
-a          display socket information for all protocols
-h          Displays this message
-i          display interface information for all interfaces
-m          display buffer pool information for 1 of the system
pools
-p          display socket information for 1 of the protocols
```

```

        -r          display the route table information
;

```

### **pass:cmd="nslookup"**

The '**nslookup**' **pass** command supports debugging of domain name server (DNS) to IP addressing tables. DNS is not supported for EPAP cards for the initial release.

The following examples demonstrate typical usage.

```

eagle10506 06-12-11 08:45:57 EST  EAGLE 36.0.0

pass:loc=1215:cmd="nslookup"
Command entered at terminal #2.
;

eagle10506 06-12-11 08:45:57 EST  EAGLE 36.0.0
PASS: Command sent to card
;

eagle10506 06-12-11 08:45:57 EST  EAGLE 36.0.0

Usage: nslookup [hostname|ipaddr]

Options:
    hostname  String name
    ipaddr    d.d.d.d
;

```

### **pass:cmd="arp"**

The '**arp**' **pass** command supports the verification of and correction of IP stack ARP tables. In general, this command is not required for normal operation.

The following examples demonstrates typical usage.

```

eagle10506 06-12-11 08:43:23 EST  EAGLE 36.0.0
pass:loc=1215:cmd="arp      -h"
Command entered at terminal #2.
;

eagle10506 06-12-11 08:43:23 EST  EAGLE 36.0.0
PASS: Command sent to card
;

eagle10506 06-12-11 08:43:23 EST  EAGLE 36.0.0

Usage: arp [-a] [-d ipaddr] [-f] [-h] [-s ipaddr enetaddr]

Options:
    -a          Display All entries in ARP table
    -d          Delete specified entry (ipaddr) from ARP table
    -f          Flush all entries from ARP table
    -h          Displays this message
    -s          Set ARP table entry to associate ipaddr with enetaddr
    enetaddr   x:x:x:x:x:x

```

## INP/ANIPQ Commands

```
        ipaddr    d.d.d.d
;

eagle10506 06-12-11 08:43:25 EST  EAGLE 36.0.0

ARP command complete
;
```

### **pass:cmd="help"**

The '**help**' **pass** command provides a list of supported **pass** commands for the target location.

The following examples demonstrates typical usage.

```
eagle10506 06-12-11 08:42:18 EST  EAGLE 36.0.0
pass:loc=1215:cmd="help"
Command entered at terminal #2.
;

eagle10506 06-12-11 08:42:18 EST  EAGLE 36.0.0
PASS: Command sent to card
;

eagle10506 06-12-11 08:42:18 EST  EAGLE 36.0.0
List of commands supported is:
nslookup
netstat
arp
ping
help

END of LIST
;
```

## System Debug Services (SDS) Commands

The following section describes SDS command **ent-trace** used with INP/AINPQ.

### MSU Trap and Trace Command

INP/AINPQ uses the existing **ent-trace** command to provide a trap-and-trace function for MSUs on the SCCP card.

The user can create a MSU trigger on the SCCP card on one or more criteria (both old and new) defined in the following using the **ent-trace** command. When multiple trigger criteria are entered, the MSU is trapped when any one of the criteria are satisfied.



**CAUTION:** As with other debug commands, this command can cause OAM to reset if too many MSUs are trapped.

- **RN or SP address (Entity ID)** - Use this new criterion to trap messages immediately after performing the RTDB database lookup. If the RN or SP obtained from the database lookup matches the Entity ID provisioned in the command, the message is trapped. This parameter supports a variable number of hexadecimal digits from 1 to 15 digits, and the Entity ID specified must be the one stored in the INP/AINPQ RTDB.
- **E.164 MSISDN number (DN)** - Use this criterion to trap messages immediately before performing a INP/AINPQ search based on the MSISDN numbers defined in the INP/AINPQ RTDB. This parameter accepts a range of digits, from 5 to 15. The number specified must be an International E.164 number (MSISDN or Entity Number).
- **Global Title digits (GT)** - Use this criterion to trap messages based on CdPA Global Title Address (that is, either MSISDN (+ST) number or RN + MSISDN (+ST)) present in the SCCP part of the message.
- **Origination point code (SSPI/SSPN)** - Use this criterion to trap messages based on CgPA SPC present in the SCCP part of the message. If no point code is present in the CgPA SPC, the criteria is matched with the OPC present in the MTP part of the message.

A trace must still be set on all SCCP cards; specify `card=sccp-a11`. Use a repetition parameter (`rep`) to control the number of MSUs that are trapped.

MSUs that satisfy any trigger criteria are trapped on the SCCP card, are forwarded to OAM, and are displayed. Refer to *Commands Manual* for a complete description of the `ent-trace` command.

# INP/AINPQ Feature Activation

Introduction.....	4-1
Prerequisites .....	4-2
Feature Activation Overview.....	4-4
Feature Activation Procedure .....	4-10



**CAUTION:** For an in-service environment, contact “Customer Care Center” on page 1-10 before continuing to activate either the INP feature or the AINPQ feature. For an environment that is not yet in-service, you may continue with this procedure.

**NOTE:** The INP feature cannot be enabled if any of the DSMs have less than 1GB of memory installed. The AINPQ feature cannot be enabled if any of the DSM cards have less than 4GB of memory installed. Refer to the *Dimensioning Guide for EPAP Advanced DB Features Technical Reference* for important information on the dimensioning rules and the DSM database capacity requirements.

## Introduction

This chapter identifies prerequisites for the INP/AINPQ feature activation procedures, an overview of the activation steps, and a matching number of detailed step descriptions to turn on the INP/AINPQ features. The INP/AINPQ feature activation procedure is performed at the EAGLE 5 ISS. The INP and AINPQ features can be enabled and turned on independently.

The INP and AINPQ features support numbers of varying lengths in a flexible way without requiring software modifications.

- The INP feature applies to ITU-I (international) and ITU-N (national) network environments. The INP Query Services apply to ITU-N networks only.

- The AINPQ feature applies to ITU-N networks only.

The INP feature, AINPQ feature, and other related features, are optional and can be purchased from Tekelec. If you are not sure whether you have purchased a specific feature, contact your Tekelec Sales or Account Representative.



**CAUTION:** Once a feature has been enabled with the `enable-ctrl-feat` command and then turned on with the `chg-ctrl-feat` command, it cannot be turned off. Since features may overwrite other features or create changes in the database, assure that you have a license and full technical support from Tekelec before turning on this or any feature.

**NOTE:** The INP and AINPQ features require a DSM card running the VSCCP application. Systems with TSM cards running the SCCP application need to be upgraded to DSM cards prior to turning on the INP or AINPQ features.

Refer to the *Dimensioning Guide for EPAP Advanced DB Features Technical Reference* for important information on the dimensioning rules and the DSM database capacity requirements.

**Procedures described in the remainder of this manual apply only to the INP and AINPQ features and can only be performed if the INP or AINPQ feature is turned on.**

The following features are related to the GSM (Global System for Mobile communications) Flexible Numbering feature (see your Tekelec Sales or Account Representative for additional information):

- Global Title Translation (GTT)
- Enhanced Global Title Translation (EGTT)
- Variable-Length Global Title Translation (VGTT)
- EAGLE Provisioning Application Processor (EPAP)

## Prerequisites

The INP/AINPQ feature activation assumes that the features Global Title Translation (GTT), Enhanced Global Title Translation (EGTT), and Variable-Length Global Title Translation (VGTT) are already provisioned. Refer to the *Database Administration Manual - Features* for provisioning procedures.

The INP/AINPQ feature activation assumes that the EPAP software is already configured; refer to *EPAP Administration Manual*, [EPAP Software Configuration](#).

The INP/AINPQ feature activation assumes that DSM cards (minimum of 1GB for the INP feature and 4GB for the AINPQ feature) to be installed and TSM cards to be removed are identified:

## INP/AINPQ Feature Activation

- Note installed DSM card locations if any
- Note available odd-even card slots for DSM card installation
- Note installed TSM card locations
- Note adjacent odd-even TSM card slot number positions for DSM card replacement

**NOTE:** TSM cards use one card slot; DSM cards require two card slots, odd-even.

**NOTE:** Neither the INP feature nor the AINPQ feature can be turned on until the TSM cards running the SCCP application are removed from the system.

- Determine DSM card IP addresses and have them available during the activation procedure.

For in-service systems, schedule DSM card replacement in maintenance window that allows the reboot of DSM cards (`init-card:loc=<DSM card location>`) one at a time.



**CAUTION:** In an in-service environment and when replacing TSM cards with DSM cards, initialize one DSM card at a time. Verify its return to IS-NR state before initializing another card. This precaution keeps cards in service and precludes an interruption of SCCP services.

For in-service systems with TSM cards running SCCP traffic, one DSM card must be installed in an available double-slot odd-even location and provisioned for VSCCP prior to inhibiting the SCCP card. The DSM card running the VSCCP application will take over the SCCP traffic (`alw-card`) once the SCCP card becomes inhibited.



**CAUTION:** SCCP traffic redundancy will be lost if inhibiting two SCCP cards at a time with only one VSCCP card available in their place. Redundancy will be re-established once the two SCCP cards are replaced with a second VSCCP card.

For in-service systems that already have the G-Port and/or G-Flex feature enabled, only perform steps 70 through 94 to turn on and configure the INP feature or the AINPQ feature or both features. With the G-Port and/or G-Flex feature enabled, the DSM cards already contain the RTDB database.

For new systems, DSM cards may be rebooted all at one time using the `init-card:appl=vsccp` command.

For new systems, GTT, EGTT, and VGTT features may be turned on prior to or immediately following the reboot of all DSM cards.

## Feature Activation Overview

This section provides an overview of the INP/AINPQ feature activation procedure. The procedure is described in detail in section “Feature Activation Procedure” on page 4-10.

The feature activation consists of these sections:

- Configure system for HLR destinations in steps 1 through 28.
- Install DSM cards in available slots and configure for VSCCP in steps 29 through 44.
- Replace TSM cards configured for SCCP with DSM cards configured for VSCCP and inhibit/remove any remaining SCCP cards in steps 45 through 69.
- Enable, turn on and configure the INP feature or the AINPQ feature or both in steps 71 through 94.

Steps 1 through 28 configure the system to be able to communicate with the system of the HLR database. The route to this database may already be configured. Perform these steps to verify that you have entered all HLR destinations for INP/AINPQ and make configuration changes as needed.

1. Display and note current system settings for point codes (PCs) and capability point codes (CPCs), destination point codes (DPCs), routes, and linksets using steps 1 through 7.
2. Use `rtrv-sid` command to display current PCs and CPCs.
3. Use `rtrv-dstn` command to display current DPCs.
4. Use `rtrv-rte` command to display current route configurations.
5. Identify PCs and CPCs; determine new PC and CPC to be entered in step 9.
6. Use `rtrv-stpopts` command to display PC or CPC format if ITU-N network.
7. Use `rtrv-map` command to display PCs of mated applications in database; remove system PC from table if necessary (refer to *Database Administration Manual - Features, Removing A Mated Application*)



**CAUTION:** Changing a system’s point code requires a system reboot using the `init-sys` command to fully implement the changes. The `init-sys` command causes a complete system reload and should be used only in an environment that is not in service. Using this command ensures the updated self identification information is loaded onto all cards, but does interrupt service.

8. Change PC, CPC, DPC, route, linkset, and LIM card configurations for the HLR database using steps 9 through 28.
9. Use `chg-sid` command to configure PC and CPC by network type.

10. Use `init-sys` command to initialize system if changes were made in step 9 to any `pca/pci/pcn` parameter.



**CAUTION:** The `init-sys` command causes a complete system reload and should be used only in an environment that is not in service. Using this command ensures the updated self identification information is loaded onto all cards, but does interrupt service.



**CAUTION:** When the `init-sys` command executes, the system does not retain the manually initiated state (for example, OOS-MT-DSBLD) for the signaling link, card, or terminal. After the command executes, the system attempts to bring all provisioned links, cards, and terminals on line, including those that were previously out of service. You will need to manually put each device back into its previous state after the system is back on line. Print or electronically capture the output of the `rept-stat-slk`, `rept-stat-card`, and `rept-stat-trm` commands for reference prior to issuing the `init-sys` command. To restore a device to its previous state, issue the appropriate inhibit/deactivate command listed in the *Eagle STP Commands Manual* in the **Related Commands** section for each of the above `rept-stat` commands.

11. Use `rtrv-sid` command to display new PC and CPC.
12. Use `ent-dstn` command to enter DPC for HLR destinations.
13. Use `rtrv-dstn` command to display new HLR DPC.
14. Use `ent-ls` command to enter linkset and assign DPC for HLR destinations.
15. Use `rtrv-ls` command to display new linkset and assigned DPC for HLR destinations.
16. Use `ent-card` command to enter LIM card(s) into database.
17. Use `rtrv-card` command to display new LIM card(s) in database.
18. Use `ent-slk` command to assign signaling link(s) to LIM card(s).
19. Use `rtrv-slk` command to display new signaling link(s) assigned to LIM card(s).
20. Use `ent-rte` command to assign route to new DPC.
21. Use `rtrv-rte` command to display route assigned to new DPC.
22. Use `ent-map` command to enter mated application into database.
23. Use `rtrv-map` command to display new mated application in database.
24. Use `alw-card` command to allow LIM card(s).
25. Use `rept-stat-card` command to display status of new LIM card(s) in database.

26. Use `act-slk` command to activate new signaling link(s) for LIM card(s).
27. Use `rept-stat-slk` command to display IS-NR status of signaling link(s).
28. Use `rtrv-card` command to confirm the new LIM card(s) and identify VSCCP cards (DSM cards running VSCCP application) and SCCP cards (TSM cards running SCCP application).



**CAUTION:** When adding DSM cards in an in-service environment, you must take care not to interrupt traffic. Before replacing SCCP cards with DSMs, first install a VSCCP card in an available odd-even double-slot prior to removing SCCP cards to make additional room for other DSM cards.

29. Install and configure DSM card(s) in available odd-even slots as needed using steps 30 through 44.
30. Install DSM card(s) in available odd-even slots and verify green IMT bus LEDs.
31. Use `ent-card` command to enter DSM card(s) as VSCCP card(s) into database.
32. Use `rtrv-card` command to display new VSCCP card(s) in database.
33. Use `rtrv-ip-host` command to display current IP host information in database.
34. Use `ent-ip-host` command to add host name and IP address for each VSCCP link.
35. Use `rtrv-ip-host` command to display changed IP host information.
36. Use `chg-ip-card` command to set local domain and IP router address if necessary.
37. Use `rtrv-ip-card` command to display changed VSCCP card information.
38. Use `rtrv-ip-lnk` command to display current link parameters associated with the VSCCP card.
39. Use `chg-ip-lnk` command to set the IP address port and speed associated with the VSCCP card.
40. Use `rtrv-ip-lnk` command to display changed link parameters.
41. Use `alw-card` command to boot DSM card in TSM emulation mode.
42. Use `rept-stat-card` command to display IS-NR status of VSCCP card.
43. Use `pass` command to test presence of EPAP hosts on network.
44. Repeat steps 30 through 43 to add all DSM cards (N+1) to be installed in available slots. Go to the next step to start replacing TSM cards.

## INP/AINPQ Feature Activation

45. Replace TSM card(s) with DSM cards if applicable, and add DSM card(s) to database using steps 46 through 68.
46. Use `rtrv-card` command to display TSM cards running the SCCP application (SCCP cards) in database.
47. Use `rept-stat-card` command to display SCCP cards in IS-NR status.
48. Use `inh-card` command to inhibit SCCP card(s)
49. Use `rept-stat-card` command to display OOS-MT-DSBLD status of SCCP card(s).
50. Use `dlt-card` command to delete SCCP card(s) from database.
51. Use `rtrv-card` command to verify removal of SCCP cards from database.
52. Remove first TSM card from shelf.
53. Remove second TSM card from shelf.
54. Install DSM card in shelf and verify green IMT bus LEDs.
55. Use `ent-card` command to enter DSM card as VSCCP card into database.
56. Use `rtrv-card` command to display new VSCCP card in database.
57. Use `rtrv-ip-host` command to display IP host information in database.
58. Use `ent-ip-host` command to add host name and IP address for VSCCP link.
59. Use `rtrv-ip-host` command to display changed IP host information in database.
60. Use `chg-ip-card` command to set local domain and IP router address if necessary.
61. Use `rtrv-ip-card` command to display changed VSCCP card information.
62. Use `rtrv-ip-lnk` command to display current link parameters associated with VSCCP card.
63. Use `chg-ip-lnk` command to set the IP address port and speed associated with VSCCP card.
64. Use `rtrv-ip-lnk` command to display changed link parameters associated with the VSCCP card.
65. Use `alw-card` command to boot DSM card in TSM emulation mode.
66. Use `rept-stat-card` command to display IS-NR status of VSCCP card.
67. Use `pass` command to test presence of EPAP hosts on network.
68. Repeat steps 46 through 67 to replace all adjacent TSM cards identified in the prerequisites and to be replaced with DSM cards.

69. Repeat steps 48 through 52 to inhibit any remaining TSM cards running the SCCP application and remove them from database and shelf.

**NOTE:** Neither the INP feature nor the AINPQ feature can be turned on until TSM cards running the SCCP application are removed from the system.



**CAUTION:** Contact Tekelec Customer Care Center at this point for assistance in completing this INP/AINPQ activation procedure (see “Customer Assistance” on page 1-10). Do not proceed without consulting with Tekelec Customer Care Center.

70. Enable, turn on and configure the INP feature or the AINPQ feature or both features using steps 71 through 94.
71. Use the `enable-ctrl-feat` to enable INP feature or the AINPQ feature or both features.
72. Use the `chg-ctrl-feat` command to turn on INP feature or the AINPQ feature or both features.
73. Use the `chg-sid` command to enter INP/AINPQ capability point codes (for INP/AINPQ Query Services).
74. Use the `rtrv-sid` command to display new INP/AINPQ capability point codes.
75. Use the `ent-cspc` command to enter the point code of the EAGLE 5 ISS mate and of any nodes that will send route-on-subsystem queries to the local INP/AINPQ subsystem (for INP/AINPQ Query Services).
76. Use the `rtrv-cspc` command to verify changes.
77. Use the `ent-map` command to enter local INP/AINPQ subsystem and its mate subsystem (on the other EAGLE 5 ISS) with the concerned point code list from the previous step (for INP/AINPQ Query Services).
- Use the `ent-map` command to enter any new nodes to which INP message relay will do final GTT.
78. Use `rtrv-map` command to display new mated applications in database.
79. Use the `ent-ss-app1` command to enter the state and subsystem number for the INP/AINPQ local subsystem (for INP/AINPQ Query Services).
80. Use the `rtrv-ss-app1` command to verify the changes.
81. Use `chg-stpopts` command to enter default country code (CC) and default network destination code (NDC) if handling non-international numbers.
82. Use `rtrv-stpopts` command to verify changes of CC and NDC.

83. Use the `chg-inpopts` command to enter various INP/AINPQ system options used for number conditioning and INP/AINPQ normalization (for INP Query Services).
84. Use the `rtrv-inpopts` command to verify changes.
85. Use the `ent-homern` command to enter any Home RNs that are prefixed to DNs for incoming INP/AINPQ MR messages.
86. Use `rtrv-homern` command to verify routing number prefixes.
87. Use `ent-srvsel` command to enter INP/AINPQ service selectors.
88. Use `rtrv-srvsel` command to verify changes to INP/AINPQ service selectors.
89. Use the `alw-map-ss` command to bring the local INP/AINPQ subsystem into service (for INP/AINPQ Query Services).
90. Use the `rept-stat-sccp` command to verify activation of INP/AINPQ subsystem.



**CAUTION:** When you have an in-service environment and you are replacing TSM cards with DSM cards, initialize one DSM card at a time. Verify its return to IS-NR state before initializing another card. This precaution keeps cards in service and precludes an interruption of SCCP services.

91. Use `init-card:loc=<DSM card>` command to load RTDB, OAM, GPL, and GTT data to VSCCP card.
92. Use `rept-stat-card` command to display IS-NR status of VSCCP card.
93. Repeat steps 91 and 92 to reboot each DSM card.

**NOTE:** Once the INP or AINPQ feature is turned on, always boot the DSM cards with the `init-card:loc=<DSM card location>` command.

94. Confirm success of activation procedure with `rept-stat-sccp`, `rept-stat-mps`, and `rept-stat-db:display=all` commands.

EPAP can now administer INP/AINPQ entity objects and INP/AINPQ subscribers. For the details about performing these actions, refer to the *EPAP Administration Manual*.

The detailed INP/AINPQ activation procedure is described next.

## Feature Activation Procedure

### Procedure

---

1. Before changing a true point code (PC) and adding a capability point code (CPC) for the INP/AINPQ feature, display the current values of the self-identification configuration (shown in step 2), the destination point codes (DPCs) (shown in step 3), and the routes and linksets assigned to the DPCs (shown in step 4). The INP feature applies to ITU-I (international) and ITU-N (national) networks. The AINPQ feature applies to ANSI-41 networks.

2. Display the current self identification of the system (PC and CPC) using the `rtrv-sid` command. This is an example of the possible output:

```
rlghncxa03w 01-10-07 00:57:31 GMT EAGLE 36.0.0
PCA          PCI          PCN          CLLI          PCTYPE
----- 1-100-1          11111          rlghncxa03w  OTHER
```

```
CPCA
-----
```

```
CPCI
1-101-1          1-101-2          1-101-3          1-101-4
```

```
CPCN
11121          11122          11123          11124
```

If the ITUDUPPC (ITU national duplicate point code) feature is on, the ITU national point code also contains a group code. The group code is a two-character field from aa to zz that is entered as the last subfield of an ITU national point code, nnnnn-gc (for example, 2112-aa)

3. Display the current destination point codes in the destination point code table (`dpci/dpcn`) using the `rtrv-dstn` command. This is an example of the possible output:

```
rlghncxa03w 01-10-10 11:43:04 GMT EAGLE 36.0.0
DPCA        CLLI        BEI ELEI    ALIASI    ALIASN    DOMAIN
-----  -----  ---  ---  -----  -----  ---
```

```
DPCI        CLLI        BEI ELEI    ALIASA    ALIASN    DOMAIN
2-100-1    rlghncxa03w no  ---  222-210-000  12001  SS7
```

```
DPCN        CLLI        BEI ELEI    ALIASA    ALIASI    DOMAIN
21111    rlghncxa03w no  ---  222-200-200  2-121-1  SS7
```

```
DESTINATION ENTRIES ALLOCATED:      2000
  FULL DPC(s) :                      2
  NETWORK DPC(s) :                    0
  CLUSTER DPC(s) :                    0
  TOTAL DPC(s) :                      2
  CAPACITY (% FULL) :                  1%
X-LIST ENTRIES ALLOCATED:            500
```

---

4. Display the current route configuration using the `rtrv-rte` command. This is an example of the possible output:

```

rlghncxa03w 01-10-07 11:43:04 GMT EAGLE 36.0.0
-----
DPCA          ALIASI          ALIASN          CLLI          LSN          RC APCA
-----
DPCI          ALIASN          ALIASA          CLLI          LSN          RC APCI
2-100-1      121111         -----        idp1         ls100001     10 1-234-5
                                     ls100002     10 1-234-6
                                     ls100003     20 1-234-7
                                     ls100004     30 1-234-1
                                     ls100005     40 1-234-2
                                     ls100006     50 1-234-3

DPCN          ALIASA          ALIASI          CLLI          LSN          RC APCN
21111        -----        0-001-1        ndp1         ls200001     10 11111
                                     ls200002     10 11112
                                     ls200003     20 11113
                                     ls200004     30 11114
                                     ls200005     40 11115
                                     ls200006     50 11116
    
```

5. If the system's point code (`pci/pcn`) or capability point code (`cpci/cpcn`) to be configured in this procedure is shown in steps 2, 3, or 4, choose another point code to configure with this procedure (step 9).

6. If configuring the system point code or capability point code (`pcn` or `cpcn`) of an ITU-N network, view the current value of the ITU-N point code format. Otherwise continue with step 7.

Enter the `rtrv-stpopts` command and specify the ITU-N point code format option `npcfmti`. The `npcfmti` option identifies how the ITU-N point code is entered into the database and how it is displayed in any outputs. The value is shown in the `NPCFMTI` field. This is an example of the possible output:

```

rlghncxa03w 01-10-17 16:02:05 GMT EAGLE 36.0.0
STP OPTIONS
-----
MTPT31CTL          1
MTPLTI             yes
MTPLTCTDPCQ        3
MTPLTST            10000
MTPXLQ             500
MTPXLET            0100
MTPXLOT            90%
MTPDPCQ            1750
TFATFRPR           1000
MTPRSI             yes
MTPRSIT            5000
MTPLPRST           yes
MTPT10ALT          30000
SLSCNV             perls
UIMRD              yes
CRITALMINH         no
DISPACTALMS        no
NPCFMTI            4-4-4-2
DEFCC               49
DEFNDC              177
DSMAUD              on
    
```

If you wish to change the format of the ITU-N point code, go to section "ITU National Point Code Formats" in the *Eagle STP Database Administration Manual - SS7*. Then continue with step 7.

7. Display the mated applications in the database using the `rtrv-map` command. These are examples of possible output:

```
rlghncxa03w 01-10-07 11:43:04 GMT EAGLE 36.0.0
PCN          SSN  RC  MPCN          MSSN MATERC SRM  MRC  GRP  NAME
11111        5   10 12347          5       20
```

```
rlghncxa03w 01-10-07 11:43:04 GMT EAGLE 36.0.0
PCI          SSN  RC  MPCN          MSSN MATERC SRM  MRC  GRP  NAME
2-100-1      5   20 3-200-1        250     99 ---  ---  abcdefgh
```

If the system's point code is shown in the `rtrv-map` command output (in the `PCA`, `PCI`, `PCN`, `MPCA`, `MPCI`, or `MPCN` fields), remove the system's point code from the mated application table. Refer to procedure "Removing a Mated Application" in the *Eagle STP Database Administration Manual - Features*.

If the system's point code or capability point code is a destination point code of a route, select a point code that is not the destination point code of a route (see output of the `rtrv-rte` command in step 4) and not in the destination point code table (see output of the `rtrv-dstn` command in step 3).

- 
8. Change PC, CPC, DPC, route, linkset, and LIM card configurations for the HLR database using steps 9 through 28.
- 



**CAUTION:** Changing a system's point code requires a system reboot using the `init-sys` command to fully implement the changes. The `init-sys` command causes a complete system reload and should be used only in an environment that is not in service. Using this command ensures the updated self identification information is loaded onto all cards but does interrupt service.

9. Configure the system's point code (`pci/pcn`) and capability point code (`cpci/cpcn`) by network type using the `chg-sid` command. For example, enter one of these commands:

```
chg-sid:pci=1-100-2:cpci=1-102-1
```

```
chg-sid:pcn=11112:cpcn=11125
```

where:

:`pci/pcn` – The point code used to uniquely identify the system.

:`cpci/cpcn` – The point code used by the SS7 protocol to identify a group of functionally related EAGLE 5 ISSs in the signaling network to which the EAGLE 5 ISS belongs.

After successful completion of this command, the system returns the following output:

```
rlghncxa03w 01-10-07 00:57:31 GMT EAGLE 36.0.0
CHG-SID: MASP A - COMPLTD
```

When any of the `pci/pcn` parameters have changed, the system needs to be reinitialized. The following caution message is displayed:

CAUTION: SYSTEM SITE ID HAS BEEN CHANGED, MANUAL RE-INITIALIZATION IS NEEDED

---



**CAUTION:** The `init-sys` command causes a complete system reload and should be used only in an environment that is not in service. Using this command ensures the updated self identification information is loaded onto all cards, but does interrupt service.



**CAUTION:** When the `init-sys` command executes, the system does not retain the manually initiated state (for example, OOS-MT-DSBLD) for the signaling link, card, or terminal. After the command executes, the system attempts to bring all provisioned links, cards, and terminals on line, including those that were previously out of service. You will need to manually put each device back into its previous state after the system is back on line. Print or electronically capture the output of the `rept-stat-slk`, `rept-stat-card`, and `rept-stat-trm` commands for reference prior to issuing the `init-sys` command. To restore a device to its previous state, issue the appropriate inhibit/deactivate command listed in the *Eagle STP Commands Manual* in the Related Commands section for each of the above `rept-stat` commands.

10. Reinitialize the system by entering the `init-sys` command if changes were made in step 9 to any `pca/pci/pcn` parameter.

**NOTE:** The `init-sys` command must be entered twice within 30 seconds for the system to re-initialize. If the `init-sys` command is not executed twice within 30 seconds, the attempt to re-initialize the system is aborted.

When the `init-sys` command is first entered, this message should appear.

```
rlghncxa03w 01-10-07 00:57:31 GMT EAGLE 36.0.0
CAUTION: This command causes a complete system reload, and
will result in traffic loss.
Re-enter command within 30 seconds to confirm.
```

When the `init-sys` command is re-entered within the 30 second time limit, this message should appear.

```
rlghncxa03w 01-10-07 00:57:31 GMT EAGLE 36.0.0
Init System command issued at terminal #3
```

From the time that the `init-sys` command is accepted, you must wait approximately two minutes before you can perform step 11 (logging into the system). If the terminal is in the VT-100/VT-320 mode, the terminal display will be refreshed with non-zero alarm counts. During this two-minute interval, an intermediate screen refresh occurs, which is caused by the MASP's role change from active to standby and from standby to active. This screen refresh is typically a partial refresh and the alarm indicators are set to zero.

If you are logged into the system in the KSR mode, the only response you will receive of being able to log into the system is the message 'UAM 0009, MASP became active'. UAM 0009 could be issued twice due to a possible transient

MASP role change (switching from active to standby). Following the execution of the `init-sys` command, the MASP that was active before the `init-sys` command was entered will be the active MASP again when the system has finished reinitializing.

11. Verify the SID changes using the `rtrv-sid` command. This is an example of the possible output:

```
durhncxa03w 01-10-07 00:57:31 GMT EAGLE 36.0.0
PCA          PCI          PCN          CLLI          PCTYPE
-----      -1-100-1      11111        rlghncxa03w   OTHER

CPCA
-----

CPCI
1-101-1      1-101-2      1-101-3      1-101-4
1-102-1

CPCN
11121        11122        11123        11124
11125
```

12. Enter a destination point code for the HLR location in the Destination Point Code table by network type using the `ent-dstn` command. For example, enter one of these commands:

```
ent-dstn:dpci=2-100-2
```

```
ent-dstn:dpcn=21112
```

where:

:`dpci/dpcn` – The destination point code being added to the database

The system returns this message:

```
rlghncxa03w 01-10-17 15:35:05 GMT EAGLE 36.0.0
Destination table is (40 of 4000) 1% full
ENT-DSTN: MASP A - COMPLTD
```

13. Verify the changes using the `rtrv-dstn` command and specifying the DPC that was entered in step 75. For example, enter one of these commands:

```
rtrv-dstn:dpci=2-100-2
```

```
rtrv-dstn:dpcn=21112
```

This is an example of the possible output for DPCIs.

```
rtrv-dstn:dpci=2-100-2

RLGHNCXA03W 01-10-30 21:16:37 GMT EAGLE 36.0.0
DPCI        CLLI        BEI ELEI    ALIASA    ALIASN    DOMAIN
2-100-2     -----    no  ---     -----    21112     SS7

          SPC          NCAI
          -----    no

Destination table is (20 of 2000) 1% full
```

This is an example of the possible output for DPCNs.

```
rtrv-dstn:dpcn=21112

RLGHNCXA03W 01-10-30 21:16:37 GMT EAGLE 36.0.0
DPCN          CLLI          BEI  ELEI  ALIASA          ALIASI  DOMAIN
21112          -----          no  ---  -----          2-100-2  SS7

                SPC          NCAI
                -----          no

Destination table is (20 of 2000) 1% full
```

14. Enter a linkset with the **ent-ls** command, and assign it to the destination point code by network type. For example, enter one of these commands:

```
ent-ls:lsn=ls400001:apci=2-200-2:lst=c
ent-ls:lsn=ls500001:apcn=21122:lst=c
```

where:

- :lsn** – The name of the linkset
- :apci/apcn** – Adjacent point code – the point code identifying the node that is next to the system
- :lst** – The linkset type of the specified linkset

After successful completion of this command, the system returns the following message:

```
RLGHNCXA03W 01-10-17 16:23:21 GMT EAGLE 36.0.0
Link set table is ( 114 of 1024) 12% full
ENT-LS: MASP A - COMPLTD
```

15. Verify the changes using the **rtrv-ls** command and specifying the linkset name. For example, enter one of these commands:

```
rtrv-ls:lsn=ls400001
rtrv-ls:lsn=ls500001
```

For lsn400001, the system returns output similar to the following:

```

                L3T  SLT
LSN          APCI (SS7)  SCRN  SET  SET BEI LST LNKS GWSA GWSM GWSL SLSCI
NIS
ls400001    2-200-2      scr1  1    2    no  a   0    on  off  off  no    on
CLLI        TFATCABMLQ  MTPRSE ASL8
RLGHNCXA03W 1          no    no

                L2T          L1          PCR PCR
LOC  PORT SLC TYPE  SET BPS  MODE TSET ECM  N1  N2

Link set table is (114 of 1024) 12% full
```

For lsn500001, the system returns output similar to the following:

```

                                L3T  SLT
LSN          APCN (SS7)  SCRN  SET  SET  BEI  LST  LNKS  GWSA  GWSM  GWSL  SLSCI
NIS
ls500001    21122          scr3  1    2   no  a    0    on   off  off  no    on
CLLI        TFATCABMLQ  MTPRSE  ASL8
RLGHNCXA03W 1          no    no
                                L2T    L1          PCR  PCR
LOC  PORT  SLC  TYPE  SET  BPS  MODE  TSET  ECM  N1  N2
Link set table is (114 of 1024) 12% full

```

16. Add the LIM cards to the database using the `ent-card` command. For this example, enter these commands:

```
ent-card:loc=1105:type=limocu:appl=ccs7itu
ent-card:loc=1106:type=limocu:appl=ccs7itu
```

where:

- :loc - specifies the slot number for the card.
- :type - specifies that the card is a LIMOCU card.
- :appl - specifies that the application is CCS7ITU.

After successful completion of this command, the system returns the following message:

```
RLGHNCXA03W 01-10-12 09:12:36 GMT EAGLE 36.0.0
ENT-CARD: MASP A - COMPLTD
```

17. Verify the changes using the `rtrv-card` command with the card location specified. For this example, enter these commands:

```
rtrv-card:loc=1105
rtrv-card:loc=1106
```

These are examples of the possible output:

```

RLGHNCXA03W 01-10-30 09:12:36 GMT EAGLE 36.0.0
CARD  TYPE          APPL          PORT A LSET (SLC)  PORT B LSET (SLC)
1105  LIMOCU        CCS7ITU        -----  (--)  -----  (--)

RLGHNCXA03W 01-10-30 09:12:36 GMT EAGLE 36.0.0
CARD  TYPE          APPL          PORT A LSET (SLC)  PORT B LSET (SLC)
1106  LIMOCU        CCS7ITU        -----  (--)  -----  (--)

```

18. Assign signaling links to the LIM cards using the `ent-slk` command. For example, enter these commands:

```
ent-slk:loc=1105:port=a:lsn=ls400001:slc=0:l2tset=1
ent-slk:loc=1106:port=a:lsn=ls500001:slc=0:l2tset=1
```

where:

- :loc - The card location of the LIM that the SS7 signaling link will be assigned to.

**:port** – The port on the card specified in the **loc** parameter.

**:lsn** – The name of the linkset that will contain the signaling link.

**:slc** – The signaling link code. The **slc** must be unique within the linkset. It must be the same at both the system location and the distant node.

**:l2tset** – The level 2 timer set table. A signaling link may be assigned to any of the twenty tables.

After successful completion of this command, the system returns the following message:

```
RLGHNCXA03W 01-10-07 08:29:03 GMT EAGLE 36.0.0
ENT-SLK: MASP A - COMPLTD
```

Signaling links are the only elements in the database directly supported by a hardware device. When a link is added to a linkset, the link remains in the state OOS-MT-DSBLD (out of service maintenance disabled) until it is activated; see step 26.

19. Verify the changes using the **rtrv-slk** command, specifying the card location and port of the signaling link entered in step 18.

```
rtrv-slk:loc=1105:port=a
```

```
rtrv-slk:loc=1106:port=a
```

This is an example of the possible output.

```
RLGHNCXA03W 01-10-19 21:16:37 GMT EAGLE 36.0.0
LOC  PORT LSN      SLC TYPE      L2T  BPS      L1      TSET  ECM  PCR  PCR
1105  A      1s400001  0  LIMOCU      1    56000  ---  ---  BASIC ---  -----
```

```
RLGHNCXA03W 01-10-19 21:16:37 GMT EAGLE 36.0.0
LOC  PORT LSN      SLC TYPE      L2T  BPS      L1      TSET  ECM  PCR  PCR
1106  A      1s500001  0  LIMOCU      1    56000  ---  ---  BASIC ---  -----
```

20. Add a route for the new DPC by network type using the **ent-rte** command. For example, enter one of these commands:

```
ent-rte:dpci=2-100-2:lsn=1s400001:rc=10
```

```
ent-rte:dpcn=21112:lsn=1s500001:rc=10
```

where:

**:dpci/dpcn** – Destination point code of the node that the traffic is bound for

**:lsn** – The name of the linkset that will carry the traffic bound for the node specified by the destination point code.

**:rc** – The relative cost (priority) for this route.

After successful completion of this command, the system returns the following message:

```
RLGHNCXA03W 01-10-07 08:28:30 GMT EAGLE 36.0.0
ENT-RTE: MASP A - COMPLTD
```

21. Verify the changes using the `rtrv-rte` command and specifying the destination point code of the route. This is an example of the possible output:

```
rlghncxa03w 01-10-07 11:43:04 GMT EAGLE 36.0.0
DPCA          ALIASI          ALIASN          CLLI          LSN          RC APCA
-----
DPCI          ALIASN          ALIASA          CLLI          LSN          RC APCI
2-100-1      121111          240-111-111    idp1          ls100001     10 1-234-5
                                     ls100002     10 1-234-6
                                     ls100003     20 1-234-7
                                     ls100004     30 1-234-1
                                     ls100005     40 1-234-2
                                     ls100006     50 1-234-3
2-100-2      121111          240-111-111    idp1          ls400001    10 1-200-2

DPCN          ALIASA          ALIASI          CLLI          LSN          RC APCN
21111        011-222-111    0-001-1          ndp1          ls200001     10 11111
                                     ls200002     10 11112
                                     ls200003     20 11113
                                     ls200004     30 11114
                                     ls200005     40 11115
                                     ls200006     50 11116
21112        011-222-111    0-001-1          ndp1          ls500001    10 11122
```

22. Add a mated application to the database by network type using the `ent-map` command. For this example, enter this command:

```
ent-map:pci=2-100-1:ssn=12:rc=20:mpci=3-200-1:mssn=50
:materc=99:grp=grp03
ent-map:pcn=11112:ssn=12:rc=10:mpcn=11114:mssn=250:materc=99
:grp=grp07
```

where:

`:pci/pcn` – The point code of the primary signaling point that is to receive the message.

`:ssn` – Subsystem number – the subsystem address of the primary point code that is to receive the message.

`:rc` – The relative cost

`:mpc/mpca/mpci/mpcn` – The point code of the backup signaling point that is to receive the message.

`:mssn` – Mate subsystem number – the subsystem address of the backup point code that is to receive the message.

`:materc` – Mate relative cost.

`:grp` – The name of the concerned signaling point code group that contains the point codes that should be notified of the subsystem status. This parameter applies to both RPCs/SSNs.

## INP/AINPQ Feature Activation

When each of these commands have successfully completed, this message should appear:

```
RLGHNCXA03W 01-10-07 00:28:31 GMT EAGLE 36.0.0
ENT-MAP: MASP A - COMPLTD
```

---

23. Verify the changes using the `rtv-map` command. These are examples of possible output.

```
rlghncxa03w 01-10-07 11:43:04 GMT EAGLE 36.0.0
PCI          SSN  RC  MPCN          MSSN MATERC  SRM  MRC  GRP NAME
11111        5   20 12347          250         99  ---  ---  GRP07
11112        12  0  12347          250         99  ---  ---  GRP07

rlghncxa03w 01-10-07 11:43:04 GMT EAGLE 36.0.0
PCI          SSN  RC  MPCN          MSSN MATERC  SRM  MRC  GRP NAME
1-100-1      5   0  3-200-1       250         99  ---  ---  GRP03
2-100-1      12  20 3-200-1       50          99  ---  ---  GRP03
```

---

24. Allow the LIM cards that were entered in step 16 by using the `alw-card` command. For example, enter these commands:

```
alw-card:loc=1105
```

```
alw-card:loc=1106
```

This message appears:

```
RLGHNCXA03W 01-10-30 21:20:37 GMT EAGLE 36.0.0
Card has been allowed.
```

---

25. Verify the in-service normal (IS-NR) status of the cards using the `rept-stat-card` command. This is an example of the possible output:

```
RLGHNCXA03W 01-10-27 16:43:42 GMT EAGLE 36.0.0
CARD  VERSION          TYPE  APPL  PST          SST          AST
1101  100-000-00003-000  ASM   SCCP   IS-NR       Active       ---
1102  100-000-00003-000  ASM   SCCP   IS-NR       Active       ---
1103  100-000-00003-000  ACMENET STPLAN  IS-NR       Active       ---
1104  100-000-00003-000  ACMENET GLS    IS-NR       Active       ---
1105  100-000-00003-000  LIMOCU CCS7ITU  IS-NR       Active       ---
1106  100-000-00003-000  LIMOCU CCS7ITU  IS-NR       Active       ---
1113  100-000-00002-000  MCAP   OAM     IS-NR       Active       ---
1114  100-000-00002-000  TDM    IS-NR       Active       ---
1115  100-000-00002-000  MCAP   OAM     IS-NR       Active       ---
1116  100-000-00002-000  TDM    IS-NR       Active       ---
1117  100-000-00002-000  MDAL   IS-NR       Active       ---
1201  100-000-00003-000  LIMDS0 SS7ANSI  IS-NR       Active       ---
1202  100-000-00002-000  LIMV35 SS7GX25  IS-NR       Active       ---
1203  100-000-00003-000  LIMV35 SS7ANSI  IS-NR       Active       ---
1204  100-000-00003-000  LIMATM ATMANSI  IS-NR       Active       ---
1205  100-000-00001-000  DCM    IPLIM   IS-NR       Active       ---
1207  100-000-00001-000  DCM    SS7IPGW IS-NR       Active       ---
1303  100-000-00001-000  DCM    IPLIM   IS-NR       Active       ---
1305  100-000-00001-000  DCM    SS7IPGW IS-NR       Active       ---
```

---

26. Activate the signaling links entered in step 18 using the `act-slk` command. For example, enter these commands

```
act-slk:loc=1105:port=a
```

```
act-slk:loc=1106:port=a
```

The link changes its state from *OOS-MT-DSBLD* (out-of-service maintenance-disabled) to *IS-NR* (in-service normal).

The output confirms the activation.

```
RLGHNCXA03W 01-10-07 11:11:28 GMT EAGLE 36.0.0
Activate Link message sent to card
```

27. Verify the in-service normal (IS-NR) status of the signaling link using the `rept-stat-slk` command. For example, enter these commands:

```
rept-stat-slk:loc=1105
```

```
rept-stat-slk:loc=1106
```

This message should appear.

```
RLGHNCXA03W 01-10-30 21:16:37 GMT EAGLE 36.0.0
SLK      LSN      CLLI      PST      SST      AST
1105,A  1s400001  -----  IS-NR    Avail    ----
Command Completed.
```

```
RLGHNCXA03W 01-10-30 21:16:37 GMT EAGLE 36.0.0
SLK      LSN      CLLI      PST      SST      AST
1106,A  1s500001  -----  IS-NR    Avail    ----
Command Completed.
```

28. Display the new LIM cards in the database using the `rtrv-card` command. This is an example of the possible output:

```
RLGHNCXA03W 01-10-15 16:34:56 GMT EAGLE 36.0.0
CARD  TYPE      APPL      PORT A LSET (SLC)  PORT B LSET (SLC)
1101  ASM        SCCP      -----  (--)  -----  (--)
1102  ASM        SCCP      -----  (--)  -----  (--)
1103  ACMENET    STPLAN    -----  (--)  -----  (--)
1104  ACMENET    GLS       -----  (--)  -----  (--)
1105  LIMOCU     CCS7ITU   1s400001  (00)  -----  (--)
1106  LIMOCU     CCS7ITU   1s500001  (00)  -----  (--)
1113  MCAP       OAM
1114  TDM
1115  MCAP       OAM
1116  TDM
1117  MDAL
1201  LIMDS0     SS7ANSI   lsn1      (00)   lsn2      (01)
1202  LIMV35     SS7GX25   lsngwy    (00)   -----  (--)
1203  LIMV35     SS7ANSI   lsn2      (00)   lsn1      (01)
1204  LIMATM     ATMANSI   atmgwy    (00)   -----  (--)
1205  DCM        IPLIM     ipgwy1    (00)   ipgwy3    (01)
1207  DCM        SS7IPGW   ipgwy2    (00)   -----  (--)
1303  DCM        IPLIM     ipgwy1    (00)   ipgwy3    (01)
1305  DCM        SS7IPGW   ipgwy4    (00)   -----  (--)
```

Determine a location where the double-slot DSM card can be inserted. The output shows slots 1107 and 1108 are not occupied. Also determine adjacent (odd-even slots) SCCP cards for later TSM card replacements.

29. Install and configure DSM card(s) as needed in available odd-even slots using steps 30 through 44. For our example, install a DSM card in slots 1107 and 1108.
- 

30. Install the DSM card in slots 1107 and 1108. The DSM card requires two slots and must be installed in an odd slot with an adjacent empty even slot on its right side.


- a. Open the ejector levers on the DSM card. Carefully align the card's edges with the top and bottom card guides. Then push the card along the length of the card guides until the rear connectors on the card engage the mating connectors on the target shelf backplane.
- b. Press the left edge of the card's faceplate using constant pressure until you feel the card's progress cease.



**WARNING:** Do not impact the faceplate in order to mate the connectors. Any impact to the card's faceplate can damage the faceplate, the pins, or the connectors.

- c. Push in the top and bottom inject/eject clamps. This locks the card in place and ensures a strong connection with the pins on the target shelf backplane.

**Figure 4-1.** Push in Inject/Eject Clamps

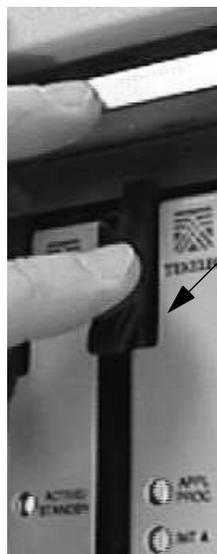

Push in the inject/eject clamps to lock the card in place.

- d. Verify that both IMT bus LEDs are green.
  - e. Install the cabling required to connect the DSM card to the MPS. Refer to the *Installation Manual* for details.
-

31. Add the DSM card to the database and configure it as VSCCP card using the `ent-card` command. For this example, enter this command.

```
ent-card:loc=1107:type=dsm:appl=vsccp
```

where:

`:loc` - specifies the slot number for the card. The slot number must be an odd number.

`:type` - specifies that the card is a DSM card.

`:appl` - specifies that the application is VSCCP.

After successful completion of this command, the system returns the following message:

```
RLGHNCXA03W 01-10-12 09:12:36 GMT EAGLE 36.0.0
ENT-CARD: MASP A - COMPLTD
```

---

32. Verify the VSCCP card using the `rtrv-card` command with the card location specified. For this example, enter this command:

```
rtrv-card:loc=1107
```

This is an example of the possible output:

```
RLGHNCXA03W 01-10-30 09:12:36 GMT EAGLE 36.0.0
CARD   TYPE      APPL      PORT A LSET (SLC)  PORT B LSET (SLC)
1107   DSM        VSCCP     -----  (--)  -----  (--)
```

---

33. Display the current IP host information in the database by entering the `rtrv-ip-host` command. This is an example of the possible output:

```
RLGHNCXA03W 01-10-30 21:17:37 GMT EAGLE 36.0.0

IPADDR      HOST
192.1.1.32  KC_HLR2
192.1.1.50  DN_MSC1
192.1.1.52  DN_MSC2
```

---

34. Add the host name and IP address for each VSCCP link using the `ent-ip-host` command. For example, enter these commands:

```
ent-ip-host:host=vsccp_1107_a:ipaddr=192.168.122.1
```

```
ent-ip-host:host=vsccp_1107_b:ipaddr=192.168.123.1
```

where:

`:host` - specifies the host name. Each VSCCP link must be specified separately.

`:ipaddr` - specifies the IP network address for each EPAP. The first three octets of the IP address must be the same as MPS A and B ports, respectively. The fourth octet identifies the DSM card and must have a unique octet identifier for the card's IP address; we recommend numbering the DSM cards sequentially, using values 1 to 25. (This example shows the assignment of the first DSM card.)

## INP/AINPQ Feature Activation

After successful completion of this command, the system returns the following message:

```
RLGHNCXA03W 01-10-30 21:18:37 GMT EAGLE 36.0.0  
ENT-IP-HOST: MASP A - COMPLTD
```

---

35. Verify the new IP host information in the database by entering the `rtrv-ip-host` command. The following is an example of the possible output.

```
RLGHNCXA03W 01-10-30 21:19:37 GMT EAGLE 36.0.0  
  
IPADDR          HOST  
192.1.1.32      KC_HLR2  
192.1.1.50      DN_MSC1  
192.1.1.52      DN_MSC2  
192.168.122.1   VSCCP_1107_A  
192.168.123.1   VSCCP_1107_B
```

---

**NOTE: Most INP/AINPQ customer private networks do not require setting up a default router for the DSM card. However, if your network configuration does require a default router to connect the DSM card communication to the EPAP, then only one default router is assignable to each DSM card. Assign the default router address to each DSM card as shown in this step.**

36. Enter local domain and IP router address for the VSCCP card using the `chg-ip-card` command. For this example, enter this command:

```
chg-ip-card:loc=1107:domain=nc.tekelec.com  
:defrouter=192.168.122.250
```

where

`:loc` – The location of the VSCCP card within the EAGLE 5 ISS.

`:domain` – The domain name of domain server.

`:defrouter` – Default router address. The IP address for default router. This is a TCP/IP address expressed in standard “dot notation”. IP addresses consist of the system’s network number and the machine’s unique host number.

After successful completion of this command, the system returns the following message:

```
RLGHNCXA03W 01-10-30 21:20:37 GMT EAGLE 36.0.0  
CHG-IP-CARD: MASP A - COMPLTD
```

---

37. Verify the new TCP/IP parameters associated with the VSCCP card in the database by entering the `rtrv-ip-card` command. This is an example of the possible output:

```
RLGHNCXA03W 01-10-30 21:21:37 GMT EAGLE 36.0.0
  LOC 1107
    SRCHORDR LOCAL
    DNSA -----
    DNSB -----
    DEFROUTER 192.168.122.250
    DOMAIN NC.TEKELEC.COM
```

---

38. Display the current link parameters associated with the VSCCP card in the database by entering the `rtrv-ip-lnk` command. This is an example of the possible output:

```
RLGHNCXA03W 01-10-30 21:14:37 GMT EAGLE 36.0.0
LOC  PORT  IPADDR          SUBMASK          DUPLEX  SPEED  MACTYPE  AUTO  MCAST
1107  A      -----             -----             HALF    10     DIX      NO    NO
1107  B      -----             -----             HALF    10     DIX      NO    NO
```

---

39. Enter the IP address port and speed associated with the VSCCP card in the database using the `chg-ip-lnk` command. For this example, enter these commands:

```
chg-ip-lnk:loc=1107:port=a:duplex=half:ipaddr=192.168.122.1
:mactype=dix:speed=100:mcast=yes:submask=255.255.255.0
chg-ip-lnk:loc=1107:port=b:duplex=half:ipaddr=192.168.123.1
:mactype=dix:speed=10:mcast=yes:submask=255.255.255.0
```

where:

- `:loc` – The card location of the VSCCP card within the EAGLE 5 ISS.
- `:port` – The port ID. The `port` parameter of the `chg-ip-lnk` command specifies the physical interface of the DSM card.
- `:ipaddr` – IP address assigned to the port. This is a TCP/IP address expressed in standard “dot notation.” IP addresses consist of the system’s network number and the machine’s unique host number.
- `:duplex` – This is the mode of operation of the interface.
- `:speed` – This is interface bandwidth in megabits per second. The speed is either 100 Mbps for main DSM network or 10 Mbps for backup DSM network.
- `:mactype` – This is the Media Access Control Type of the interface. Specify `dix` for the Digital/Inter/Xerox *de facto* standard for the Ethernet.
- `:mcast` – This is the Multicast Control of the interface.
- `:submask` – The subnet mask of the IP interface, in the form of an IP address with a restricted range of values.

## INP/AINPQ Feature Activation

When this command has successfully completed, the following message appears:

```
RLGHNCXA03W 01-10-30 21:18:37 GMT EAGLE 36.0.0
CHG-IP-LNK: MASP A - COMPLTD
```

---

40. Verify the IP address port and speed associated with the VSCCP card in the database by entering the `rtrv-ip-lnk` command. This is an example of the possible output:

```
RLGHNCXA03W 01-10-30 21:14:37 GMT EAGLE 36.0.0
LOC  PORT IPADDR          SUBMASK          DUPLEX  SPEED  MACTYPE  AUTO  MCAST
1107  A    192.168.122.1        255.255.255.0    HALF    100    DIX      NO    YES
1107  B    192.168.123.1        255.255.255.0    HALF    10     DIX      NO    YES
```

---

41. Boot the DSM card that was added in step 31 in TSM emulation mode by using the `alw-card` command. For example, enter this command:

```
alw-card:loc=1107
```

This message appears:

```
RLGHNCXA03W 01-10-30 21:20:37 GMT EAGLE 36.0.0
Card has been allowed.
```

---

42. Verify the in-service normal (IS-NR) status of the VSCCP card using the `rept-stat-card` command. This is an example of the possible output.

```
RLGHNCXA03W 01-10-27 16:43:42 GMT EAGLE 36.0.0
CARD  VERSION          TYPE  APPL  PST          SST  AST
1101  100-000-00003-000  ASM   SCCP  IS-NR        Active ---
1102  100-000-00003-000  ASM   SCCP  IS-NR        Active ---
1103  100-000-00002-000  ACMENET STPLAN IS-NR        Active ---
1104  100-000-00003-000  ASM   GLS   IS-NR        Active ---
1105  100-000-00003-000  LIMOCU CCS7ITU IS-NR        Active ---
1106  100-000-00003-000  LIMOCU CCS7ITU IS-NR        Active ---
1107  100-000-00003-000  DSM   VSCCP  IS-NR        Active ---
1113  100-000-00002-000  MCAP  OAM    IS-NR        Active ---
1114  100-000-00002-000  TDM   IS-NR        Active ---
1115  100-000-00002-000  MCAP  OAM    IS-NR        Active ---
1116  100-000-00002-000  TDM   IS-NR        Active ---
1117  100-000-00002-000  MDAL  IS-NR        Active ---
1201  100-000-00003-000  LIMDS0 SS7ANSI IS-NR        Active ---
1202  100-000-00002-000  LIMV35 SS7GX25 IS-NR        Active ---
1203  100-000-00003-000  LIMV35 SS7ANSI IS-NR        Active ---
1204  100-000-00003-000  LIMATM ATMANSI IS-NR        Active ---
1205  100-000-00001-000  DCM   IPLIM  IS-NR        Active ---
1207  100-000-00001-000  DCM   SS7IPGW IS-NR        Active ---
1303  100-000-00001-000  DCM   IPLIM  IS-NR        Active ---
1305  100-000-00001-000  DCM   SS7IPGW IS-NR        Active ---
```

---

43. Test the presence of the EPAP hosts on the network using the `pass` command with the `ping` parameter. This command is invoked with a destination (either a hostname or IP address). For example, enter the following command:

```
pass:loc=1107:cmd="ping 192.168.122.100".
pass:loc=1107:cmd="ping 192.168.122.200".
pass:loc=1107:cmd="ping 192.168.123.100".
pass:loc=1107:cmd="ping 192.168.123.200".
```

After successful completion of each command, the system returns output similar to the following:

```
rlghncxa03w 00-06-27 08:30:44 GMT EAGLE 36.0.0
pass: loc=1107: cmd="ping 192.168.122.100"
Command entered at terminal #1.
;
rlghncxa03w 00-06-27 08:30:44 GMT EAGLE 36.0.0
PASS: Command sent to card
;
rlghncxa03w 00-06-27 08:30:44 GMT EAGLE 36.0.0
PING command in progress
;
rlghncxa03w 00-06-27 08:30:46 GMT EAGLE 36.0.0
PING 192.168.122.100: 56 data bytes
64 bytes from tekral.nc.tekelec.com (192.168.122.100):icmp_seq=0.time=5. ms
64 bytes from tekral.nc.tekelec.com (192.168.122.100):icmp_seq=1.time=0. ms
64 bytes from tekral.nc.tekelec.com (192.168.122.100):icmp_seq=2.time=0. ms
----192.168.100.3 PING Statistics----
3 packets transmitted, 3 packets received, 0% packet loss
round-trip (ms) min/avg/max = 0/1/5
PING command complete
```

If the `pass` commands with the `ping` parameter is not successful, verify the the correct connection of the hardware cabling and try again. If the command fails again, contact Customer Care Center (see “Customer Assistance” on page 1-10).

- 
44. Repeat steps 30 through 43 to add all DSM cards (N+1) to be installed in available slots. Go to the next step to start replacing TSM cards with DSM cards.
- 
45. Replace TSM card(s) with DSM cards if applicable and add DSM card(s) to the database using steps 46 through 68. In this procedure, we are removing two existing adjacent TSM cards and replace them with a double-slot DSM card in slots 1101 and 1102.

**NOTE:** When adding DSM cards in an in-service environment, you must take care not to interrupt traffic. Before replacing SCCP cards with DSMs, first install a VSCCP card in an available double-slot.

---

46. Display the TSM cards running the SCCP application in the database using the `rtrv-card` command. This is an example of the possible output:

```

RLGHNCXA03W 01-10-15 16:34:56 GMT EAGLE 36.0.0
CARD  TYPE          APPL      PORT A LSET (SLC)  PORT B LSET (SLC)
1101  ASM            SCCP      -----  (--)  -----  (--)
1102  ASM            SCCP      -----  (--)  -----  (--)
1103  ACMENET        STPLAN   -----  (--)  -----  (--)
1104  ACMENET        GLS      -----  (--)  -----  (--)
1105  LIMOCU         CCS7ITU   1s300001  (00)  -----  (--)
1106  LIMOCU         CCS7ITU   1s400001  (00)  -----  (--)
1107  DSM            VSCCP     1s300001  (00)  -----  (--)
1113  MCAP           OAM
1114  TDM
1115  MCAP           OAM
1116  TDM
1117  MDAL
1201  LIMDS0         SS7ANSI   lsn1      (00)   lsn2      (01)
1202  LIMV35         SS7GX25   lsn1      (00)   -----  (--)
1203  LIMV35         SS7ANSI   lsn2      (00)   lsn1      (01)
1204  LIMATM         ATMANSI   atmgwy    (00)   -----  (--)
1205  DCM            IPLIM     ipgwy1    (00)   ipgwy3    (01)
1207  DCM            SS7IPGW   ipgwy2    (00)   -----  (--)
1303  DCM            IPLIM     ipgwy1    (00)   ipgwy3    (01)
1305  DCM            SS7IPGW   ipgwy4    (00)   -----  (--)

```

Determine the cards to be removed from the database. In this procedure, we will remove the SCCP cards in card locations **1101 and 1102**.

47. Display the SCCP cards that are in service with the `rept-stat-card:stat=nr` command. For this example, enter the following command:

```
rept-stat-card:stat=nr
```

This is an example of the possible output:

```

RLGHNCXA03W 01-10-27 16:43:42 GMT EAGLE 36.0.0
CARD  VERSION        TYPE          APPL      PST          SST          AST
1101  100-000-00003-000  ASM          SCCP        IS-NR        Active      ---
1102  100-000-00003-000  ASM          SCCP        IS-NR        Active      ---
1103  100-000-00003-000  ACMENET     STPLAN     IS-NR        Active      ---
1104  100-000-00003-000  ACMENET     GLS        IS-NR        Active      ---
1105  100-000-00003-000  LIMOCU      CCS7ITU    IS-NR        Active      ---
1106  100-000-00003-000  LIMOCU      CCS7ITU    IS-NR        Active      ---
1107  100-000-00003-000  DSM         VSCCP      IS-NR        Active      ---
1113  100-000-00002-000  MCAP        OAM        IS-NR        Active      ---
1114  100-000-00002-000  TDM
1115  100-000-00002-000  MCAP        OAM        IS-NR        Active      ---
1116  100-000-00002-000  TDM
1117  100-000-00002-000  MDAL
1201  100-000-00003-000  LIMDS0     SS7ANSI    IS-NR        Active      ---
1202  100-000-00002-000  LIMV35     SS7GX25    IS-NR        Active      ---
1203  100-000-00003-000  LIMV35     SS7ANSI    IS-NR        Active      ---
1204  100-000-00003-000  LIMATM     ATMANSI    IS-NR        Active      ---
1205  100-000-00001-000  DCM        IPLIM      IS-NR        Active      ---
1207  100-000-00001-000  DCM        SS7IPGW    IS-NR        Active      ---
1303  100-000-00001-000  DCM        IPLIM      IS-NR        Active      ---
1305  100-000-00001-000  DCM        SS7IPGW    IS-NR        Active      ---

```

48. Inhibit the SCCP cards using the `inh-card` command and specifying the card locations.

```
inh-card:loc=1101
```

```
inh-card:loc=1102
```

When each command has successfully completed, this message appears:

```
RLGHNCXA03W 01-10-12 09:12:36 GMT EAGLE 36.0.0
Card has been inhibited.
```

49. Verify that the SCCP cards are in the Out-of-Service Maintenance-Disabled (OOS-MT-DSBLD) state with the `rept-stat-card` command. This is an example of the possible output:

```
RLGHNCXA03W 01-10-27 16:43:42 GMT EAGLE 36.0.0
CARD  VERSION          TYPE  APPL  PST          SST          AST
1101  100-000-00003-000  ASM   SCCP   OOS-MT-DSBLD  Isolated  ---
1102  100-000-00003-000  ASM   SCCP   OOS-MT-DSBLD  Isolated  ---
1103  100-000-00002-000  ACMENET STPLAN  IS-NR         Active    ---
1104  100-000-00002-000  ACMENET STPLAN  IS-NR         Active    ---
1105  100-000-00003-000  LIMOCU  CCS7ITU  IS-NR         Active    ---
1106  100-000-00003-000  LIMOCU  CCS7ITU  IS-NR         Active    ---
1107  100-000-00003-000  DSM     VSCCP   IS-NR         Active    ---
1113  100-000-00002-000  MCAP    OAM      IS-NR         Active    ---
1114  100-000-00002-000  TDM     OAM      IS-NR         Active    ---
1115  100-000-00002-000  MCAP    OAM      IS-NR         Active    ---
1116  100-000-00002-000  TDM     OAM      IS-NR         Active    ---
1117  100-000-00002-000  MDAL    OAM      IS-NR         Active    ---
1201  100-000-00003-000  LIMDS0  SS7ANSI  IS-NR         Active    ---
1202  100-000-00002-000  LIMV35  SS7GX25  IS-NR         Active    ---
1203  100-000-00003-000  LIMV35  SS7ANSI  IS-NR         Active    ---
1204  100-000-00003-000  LIMATM  ATMANSI  IS-NR         Active    ---
1205  100-000-00001-000  DCM     IPLIM    IS-NR         Active    ---
1207  100-000-00001-000  DCM     SS7IPGW  IS-NR         Active    ---
1303  100-000-00001-000  DCM     IPLIM    IS-NR         Active    ---
1305  100-000-00001-000  DCM     SS7IPGW  IS-NR         Active    ---
```

50. Remove the SCCP cards from the database using the `dlt-card` command. The `dlt-card` command has only one parameter, `loc`, which is the location of the card. For this example, enter these commands:

```
dlt-card:loc=1101
```

```
dlt-card:loc=1102
```

After successful completion of this command, the system returns the following message:

```
RLGHNCXA03W 01-10-12 09:12:36 GMT EAGLE 36.0.0
DLT-CARD: MASP A - COMPLTD
```

51. Verify that the SCCP cards are removed from the database using the `rtrv-card` command and specifying the cards that were removed in step 50. For this example, enter these commands:

```
rtrv-card:loc=1101
```

```
rtrv-card:loc=1102
```

After successful completion of this command, the system returns the following message:

```
E2144 Cmd Rej: Location invalid for hardware configuration
```

---

### 52. Locate the TSM card to be removed from the shelf.

Because the TSM card takes just one slot and the DSM card requires two slots, the DSM card must be installed in an odd slot that is adjacent to an even slot on its right side. In this procedure, we will remove two TSM cards from slots 1101 and 1102 to make space for one DSM card.

- a. Push the inject/eject clamps outward from the card's faceplate (top clamp in the "UP" position, bottom clamp in the "DOWN" position). Pull the levers away from the shelf until they are parallel to the floor. Gently pull the card towards you until the card clears the shelf.

**Figure 4-2.** Push Inject/Eject Clamps Outward



- b. Place the card you have removed in an electrostatic discharge (ESD) protective container, or place the card in the spare card storage shelf.
- 

### 53. Repeat step 52 to remove the second TSM card.

---

### 54. Install the DSM card in slots 1101 and 1102.

- a. Open the ejector levers on the DSM card. Carefully align the card's edges with the top and bottom card guides. Then push the card along the length of the card guides until the rear connectors on the card engage the mating connectors on the target shelf backplane.


- b. Press the left edge of the card's faceplate using constant pressure until you feel the card's progress cease.



**WARNING:** Do not impact the faceplate in order to mate the connectors. Any impact to the card's faceplate can damage the faceplate, the pins, or the connectors.

- c. Push in the top and bottom inject/eject clamps. This locks the card in place and ensures a strong connection with the pins on the target shelf backplane.

**Figure 4-3.** Push in Inject/Eject Clamps

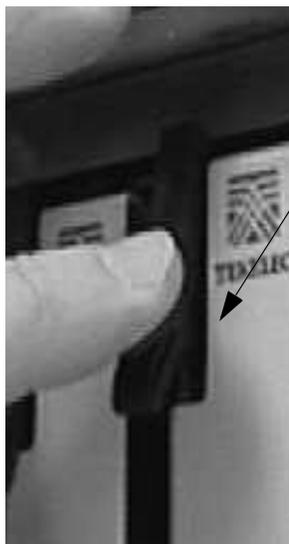

Push in the inject/eject clamps to lock the card in place.

- d. Verify that both IMT bus LEDs are green.
- e. Install the cabling required to connect the DSM card to the MPS. Refer to the *Installation Manual* for details.

- 
- 55. Add the DSM card to the database and assign the VSCCP application using the `ent-card` command. For this example, enter this command:

```
ent-card:loc=1101:type=dsm:appl=vsccp
```

where:

`:loc` - specifies the slot number for the card. The slot number must be an odd number.

`:type` - specifies that the card is a DSM card.

`:appl` - specifies that the application is VSCCP.

After successful completion of this command, the system returns the following message:

```
RLGHNCXA03W 01-10-12 09:12:36 GMT EAGLE 36.0.0
ENT-CARD: MASP A - COMPLTD
```

---

56. Display the new VSCCP card using the `rtrv-card` command with the card location specified. For this example, enter this command:

```
rtrv-card:loc=1101
```

This is an example of the possible output:

```
RLGHNCXA03W 01-10-30 09:12:36 GMT EAGLE 36.0.0
CARD   TYPE      APPL      PORT A LSET (SLC)   PORT B LSET (SLC)
1101 DSM          VSCCP     -----  (--)  -----  (--)
```

---

57. Display the current IP host information in the database by entering the `rtrv-ip-host` command. The following is an example of the possible output.

```
RLGHNCXA03W 01-10-30 21:17:37 GMT EAGLE 36.0.0
```

```
IPADDR      HOST
192.1.1.32   KC_HLR2
192.1.1.50   DN_MSC1
192.1.1.52   DN_MSC2
192.168.122.1 VSCCP_1107_A
192.168.123.1 VSCCP_1107_B
```

---

58. Add the host name and IP address for each VSCCP link using the `ent-ip-host` command. For example, enter these commands:

```
ent-ip-host:host=vsccp_1101_a:ipaddr=192.168.122.2
```

```
ent-ip-host:host=vsccp_1101_b:ipaddr=192.168.123.2
```

where:

`:host` - specifies the host name. Each VSCCP link must be specified separately.

`:ipaddr` - specifies the IP network address for each EPAP. The first three octets of the IP address must be the same as MPS A and B ports, respectively. The fourth octet identifies the DSM card and must have a unique octet identifier for the card's IP address; we recommend numbering the DSM cards sequentially, using values 1 to 25. (This example shows the assignment of the second DSM card.)

After successful completion of this command, the system returns the following message:

```
RLGHNCXA03W 01-10-30 21:18:37 GMT EAGLE 36.0.0
ENT-IP-HOST: MASP A - COMPLTD
```

---

59. Verify the new IP host information in the database by entering the `rtrv-ip-host` command. This is an example of the possible output:

```
RLGHNCXA03W 01-10-30 21:19:37 GMT EAGLE 36.0.0

IPADDR          HOST
192.1.1.32      KC_HLR2
192.1.1.50      DN_MSC1
192.1.1.52      DN_MSC2
192.168.122.1   VSCCP_1107_A
192.168.123.1   VSCCP_1107_B
192.168.122.2   VSCCP_1101_A
192.168.123.2   VSCCP_1101_B
```

---

**NOTE: Most INP/AINPQ customer private networks do not require setting up a default router for the DSM card. However, if your network configuration does require a default router to connect the DSM card communication to the EPAP, then only one default router is assignable to each DSM card. Assign the default router address to each DSM card as shown in this step.**

60. Enter local domain and IP router address for the VSCCP card using the `chg-ip-card` command. For this example, enter this command:

```
chg-ip-card:loc=1107:domain=nc.tekelec.com
:defrouter=192.168.122.250
```

where

:loc - The card location of the card within the EAGLE 5 ISS.

:domain - The domain name of domain server.

:defrouter - Default router address. The IP address for default router. This is a TCP/IP address expressed in standard "dot notation". IP addresses consist of the system's network number and the machine's unique host number.

After successful completion of this command, the system returns the following message:

```
RLGHNCXA03W 01-10-30 21:20:37 GMT EAGLE 36.0.0
CHG-IP-CARD: MASP A - COMPLTD
```

---

61. Verify the local domain and IP router address associated with the VSCCP card in the database by entering the `rtrv-ip-card` command. This is an example of the possible output:

```
RLGHNCXA03W 01-10-30 21:21:37 GMT EAGLE 36.0.0
LOC 1101
SRCHORDR LOCAL
DNSA -----
DNSB -----
DEFROUTER 192.168.122.250
DOMAIN    NC.TEKELEC.COM
```

---

62. Display the current link parameters associated with the VSCCP card in the database by entering the `rtrv-ip-lnk` command. This is an example of the possible output:

```

RLGHNCXA03W 01-10-30 21:14:37 GMT EAGLE 36.0.0
LOC  PORT IPADDR          SUBMASK          DUPLEX  SPEED  MACTYPE  AUTO  MCAST
1101  A  -----             -----             HALF    10     DIX      NO   NO
1101  B  -----             -----             HALF    10     DIX      NO   NO
1107  A  -----             -----             HALF    10     DIX      NO   NO
1107  B  -----             -----             HALF    10     DIX      NO   NO

```

---

63. Change the link parameters associated with the VSCCP card in the database using the `chg-ip-lnk` command. For this example, enter these commands:

```

chg-ip-lnk:loc=1101:port=a:duplex=half:ipaddr=192.168.122.2
:mactype=dix:speed=100:mcast=yes:submask=255.255.255.0
chg-ip-lnk:loc=1101:port=b:duplex=half:ipaddr=192.168.123.2
:mactype=dix:speed=10:mcast=yes:submask=255.255.255.0

```

where:

`:loc` – The card location of the card within the EAGLE 5 ISS.

`:port` – The port ID. The `port` parameter of the `chg-ip-lnk` command specifies the physical interface of the DSM card.

`:ipaddr` – IP address assigned to the port. This is a TCP/IP address expressed in standard “dot notation.” IP addresses consist of the system’s network number and the machine’s unique host number.

`:duplex` – This is the mode of operation of the interface.

`:speed` – This is interface bandwidth in megabits per second. The speed is either 100 Mbps for main DSM network or 10 Mbps for backup DSM network.

`:mactype` – This is the Media Access Control Type of the interface. Specify `dix` for the Digital/Inter/Xerox *de facto* standard for the Ethernet.

`:mcast` – This is the Multicast Control of the interface.

`:submask` – The subnet mask of the IP interface, in the form of an IP address with a restricted range of values.

When this command has successfully completed, the following message should appear.

```

RLGHNCXA03W 01-10-30 21:18:37 GMT EAGLE 36.0.0
CHG-IP-LNK: MASP A - COMPLTD

```

---

64. Verify the new link parameters associated with the VSCCP card in the database by entering the `rtrv-ip-lnk` command. The following is an example of the possible output.

```
RLGHNCXA03W 01-10-30 21:14:37 GMT EAGLE 36.0.0
LOC  PORT  IPADDR          SUBMASK          DUPLEX  SPEED  MACTYPE  AUTO  MCAST
1101  A    192.168.122.2    255.255.255.0    HALF    100    DIX      NO    YES
1101  B    192.168.123.2    255.255.255.0    HALF    10     DIX      NO    YES
1107  A    192.168.122.1    255.255.255.0    HALF    100    DIX      NO    YES
1107  B    192.168.123.1    255.255.255.0    HALF    10     DIX      NO    YES
```

65. Boot the DSM card that was inhibited in step 48 in TSM emulation mode by using the `alw-card` command. For example, enter this command:

```
alw-card:loc=1101
```

This message appears:

```
RLGHNCXA03W 01-10-30 21:20:37 GMT EAGLE 36.0.0
Card has been allowed.
```

66. Verify the in-service normal (IS-NR) status of the VSCCP card using the `rept-stat-card` command. This is an example of the possible output:

```
RLGHNCXA03W 01-10-27 16:43:42 GMT EAGLE 36.0.0
CARD  VERSION          TYPE  APPL  PST          SST          AST
1101  100-000-00003-000  DSM   VSCCP  IS-NR        Active       ---
1103  100-000-00002-000  ACMENET STPLAN  IS-NR        Active       ---
1104  100-000-00003-000  ASM    GLS     IS-NR        Active       ---
1105  100-000-00003-000  LIMOCU CCS7ITU  IS-NR        Active       ---
1106  100-000-00003-000  LIMOCU CCS7ITU  IS-NR        Active       ---
1107  100-000-00003-000  DSM   VSCCP  IS-NR        Active       ---
1113  100-000-00002-000  MCAP   OAM     IS-NR        Active       ---
1114  100-000-00002-000  TDM    IS-NR        Active       ---
1115  100-000-00002-000  MCAP   OAM     IS-NR        Active       ---
1116  100-000-00002-000  TDM    IS-NR        Active       ---
1117  100-000-00002-000  MDAL   IS-NR        Active       ---
1201  100-000-00003-000  LIMDS0 SS7ANSI  IS-NR        Active       ---
1202  100-000-00002-000  LIMV35 SS7GX25  IS-NR        Active       ---
1203  100-000-00003-000  LIMV35 SS7ANSI  IS-NR        Active       ---
1204  100-000-00003-000  LIMATM ATMANSI  IS-NR        Active       ---
1205  100-000-00001-000  DCM    IPLIM   IS-NR        Active       ---
1207  100-000-00001-000  DCM    SS7IPGW IS-NR        Active       ---
1303  100-000-00001-000  DCM    IPLIM   IS-NR        Active       ---
1305  100-000-00001-000  DCM    SS7IPGW IS-NR        Active       ---
```

67. Test the presence of the EPAP hosts on the network using the `pass` command with the `ping` parameter. This command is invoked with a destination (either a hostname or IP address). For example, enter the following command:

```
pass:loc=1101:cmd="ping 192.168.122.100".
```

```
pass:loc=1101:cmd="ping 192.168.122.200".
```

```
pass:loc=1101:cmd="ping 192.168.123.100".
```

```
pass:loc=1101:cmd="ping 192.168.123.200".
```

## INP/AINPQ Feature Activation

After successful completion of each command, the system returns output similar to the following:

```
rlghncxa03w 00-06-27 08:30:44 GMT EAGLE 36.0.0
pass: loc=1101: cmd="ping 192.168.122.100"
Command entered at terminal #1.
;
rlghncxa03w 00-06-27 08:30:44 GMT EAGLE 36.0.0
PASS: Command sent to card
;
rlghncxa03w 00-06-27 08:30:44 GMT EAGLE 36.0.0
PING command in progress
;
rlghncxa03w 00-06-27 08:30:46 GMT EAGLE 36.0.0
PING 192.168.122.100: 56 data bytes
64 bytes from tekral.nc.tekelec.com (192.168.122.100):icmp_seq=0.time=5. ms
64 bytes from tekral.nc.tekelec.com (192.168.122.100):icmp_seq=1.time=0. ms
64 bytes from tekral.nc.tekelec.com (192.168.122.100):icmp_seq=2.time=0. ms
----192.168.100.3 PING Statistics----
3 packets transmitted, 3 packets received, 0% packet loss
round-trip (ms) min/avg/max = 0/1/5
PING command complete
```

If the **pass** command with the **ping** parameter is not successful, verify the the correct connection of the hardware cabling and try again. If the command fails again, contact Customer Care Center (see “Customer Assistance” on page 1-10).

- 
- 68.** Repeat steps 46 through 67 to replace all adjacent TSM cards identified in the prerequisites and to be replaced with DSM cards.

- 
- 69.** Repeat steps 48 through 52 to inhibit any remaining TSM cards running the SCCP application and remove them from database and shelf.

**NOTE:** Neither the INP feature nor the AINPQ feature can be turned on until TSM cards running the SCCP application are removed from the system.



---

**CAUTION:** At this point in the procedure, contact Tekelec Customer Care Center for assistance in completing this INP/AINPQ activation procedure (see “Customer Assistance” on page 1-10).

**Do not proceed without consulting with Customer Care Center.**

- 70.** Turn on and configure the INP feature or the AINPQ feature or both using steps 71 through 94.

- 
- 71.** Enable the INP feature or the AINPQ feature or both using either or both of the following commands:

```
enable-ctrl-feat:partnum=893017901:fak=<INP_FAK>
```

```
enable-ctrl-feat:partnum=893017801:fak=<AINPQ_FAK>
```

After each command has been processed successfully, the system returns the following output:

```
rlghncxa03w 01-10-11 11:34:04 GMT EAGLE 36.0.0
ENABLE-CTRL-FEAT: MASP A - COMPLD
```

72. Turn on the INP feature or the AINPQ feature or both using either or both of the following commands (the first command is for the INP feature, and the second command is for the AINPQ feature):

```
chg-ctrl-feat:partnum=893017901:status=on
chg-ctrl-feat:partnum=893017801:status=on
```

After each command has been processed successfully, the system returns the following output:

```
rlghncxa03w 01-10-11 11:34:04 GMT EAGLE 36.0.0
CHG-CTRL-FEAT: MASP A - COMPLD
```

73. Configure an INP/AINPQ capability point code using the `chg-sid` command. For example, enter these commands:

```
chg-sid:pcn=1:cpci=1-300-1:cpctype=inp
chg-sid:cpcn=11131:cpctype=inp
```

where:

`pci/pcn` – The point code of the primary signaling point that is to receive the message.

`:cpcn/:cpci/cpcn` – The point code used by the SS7 protocol to identify a group of functionally related EAGLE 5 ISSs in the signaling network to which the EAGLE 5 ISS belongs.

`:cpctype` – the type of capability point code (use the value `inp` for either INP or AINPQ)

After successful completion of this command, the system returns the following output:

```
rlghncxa03w 01-10-07 00:57:31 GMT EAGLE 36.0.0
CHG-SID: MASP A - COMPLTD
```

74. Verify the changes using the `rtrv-sid` command. This is an example of the possible output.

```
rlghncxa03w 01-10-07 00:57:31 GMT EAGLE 36.0.0
PCA          PCI          PCN          CLLI          PCTYPE
----- 1-100-1          11111          rlghncxa03w  OTHER

CPCA
-----

CPCI
1-101-1          1-101-2          1-101-3          1-101-4
1-102-1          1-300-1
```

## INP/AINPQ Feature Activation

```
CPCN
11121          11122          11123          11124
11125

CPCN (INP)
11131
```

---

75. Enter the signaling points to a broadcast signaling point code group using the `ent-cspc` command (for INP/AINPQ Query Services). You use this command to enter the point code of the EAGLE 5 ISS mate and of any nodes that will send route-on-subsystem queries to the local INP/AINPQ subsystem. These point codes are notified of the receipt by EAGLE 5 ISS of subsystem-prohibited and subsystem-allowed SS7 SCCP management messages from an application at an adjacent signaling point and subsystem and when the local subsystem experiences a status change.

```
ent-cspc:grp=cspc
ent-cspc:grp=cspc:pcn=2
```

where:

`:grp` – The name to be assigned to the new group. This parameter is a character string associated with this broadcast list.

`:pcn` – The ITU national point code in the form of ITU number (*nnnnn*).

The system returns this message:

```
rlghncxa03w 01-10-17 15:35:05 GMT EAGLE 36.0.0
ENT-CSPC: MASP A - COMPLTD
```

---

76. Verify the changes using the `rtrv-cspc` command and showing the list of concerned signaling point codes that are to notified when subsystem-prohibited or subsystem-allowed messages are received for an associated mate application. For this example, enter these commands.

```
rtrv-cspc:grp=cspc
rtrv-cspc:grp=cspc:pcn=2
```

This is an example of the possible output.

```
rtrv-cspc:grp=cspc

RLGHNCXA03W 01-10-30 21:16:37 GMT EAGLE 36.0.0
CSPC GRP      PERCENT FULL
CSPC          0%
```

This is an example of the possible output.

```
rtrv-cspc:grp=cspc:pcn=2

RLGHNCXA03W 01-10-30 21:16:37 GMT EAGLE 36.0.0
CSPC PC TABLE IS 15% FULL.
CSPC GRP      PC
CSPC          2
```

---

77. Add a mated application to the database using the `ent-map` command. Use this command for INP/AINPQ Query Services. Enter the local INP/AINPQ subsystem and its mate subsystem (on the other EAGLE 5 ISS) with the concerned point code list from the previous steps. For this example, enter this command:

```
ent-map:pcn=1:ssn=12:grp=cspcs:mpcn=2:mssn=12
```

where:

`:pc/pca/pci/pcn` – The point code of the primary signaling point that is to receive the message.

`:mpc/mpca/mpci/mpcn` – The point code of the backup signaling point that is to receive the message.

`:ssn` – Subsystem number – the subsystem address of the primary point code that is to receive the message.

`:mssn` – Mate subsystem number – the subsystem address of the backup point code that is to receive the message.

`:grp` – The name of the concerned signaling point code group that contains the point codes that should be notified of the subsystem status. This parameter applies to both RPCs/SSNs.

When each of these commands have successfully completed, this message should appear.

```
RLGHNCXA03W 01-10-07 00:28:31 GMT EAGLE 36.0.0
ENT-MAP: MASP A - COMPLTD
```

78. Verify the changes using the `rtrv-map` command. This command shows the mated application relationship maintained by the EAGLE 5 ISS. This information supports the routing of SCCP management SSP/SSA messages. Here is an example of the possible output.

```
RLGHNCXA03W 01-10-07 00:29:31 GMT EAGLE 36.0.0
. . .
PCN          SSN   MPCN          MSSN SRM   MRC   GRP NAME
1            12    2             12  YES  YES   CSPC
. . .
```

## INP/AINPQ Feature Activation

79. Enter the `ent-ss-appl` command to reserve a subsystem number for an application and set the application to be online or offline. Use this command for INP/AINPQ Query Services. Enter the state and subsystem number for the INP/AINPQ local subsystem. For example, enter this command:

```
ent-ss-appl:ssn=12:appl=inp:stat=online
```

where:

**:ssn** – The primary subsystem number (*range = 2-255*). This value should match the INPQ SSN you define with `ent-map` in the MAP database.

**:appl** – The application type (use the value *inp* for either INP or AINPQ).

**:stat** – The status of online or offline (*online*).

The system returns this message:

```
rlghncxa03w 01-10-17 15:35:05 GMT EAGLE 36.0.0  
ENT-SS-APPL: MASP A - COMPLTD
```

---

80. Verify the change made in the previous step with the `rtrv-ss-appl` command retrieve all applications from the database. The commands displays the application type, subsystem number, and application status. For example, enter this command.

```
rtrv-ss-appl
```

This is an example of the possible output.

```
rtrv-cspc:grp=cspc  
  
RLGHNCXA03W 01-10-30 21:16:37 GMT EAGLE 36.0.0  
AAPL  SSN  STAT  
INP   12   online  
SS-APPL table is (1 of 100) 100% full
```

---

81. Enter the default country code (CC) and default network destination code (NDC) to convert the nature of address indicator (NAI) of MSISDNs to the international format (`nai=int1`) with the `chg-stpopts` command. This command can change the values of one or more of the STP node level processing option indicators kept in the STP option table. All values are assigned initially to system defaults at STP installation time, and they can be updated subsequently with this command. For example, enter the following command:

```
chg-stpopts:defcc=1:defndc=38:dsm aud=on:np cfmt i=2-9-2-1
```

where:

**:defcc** – The default country code.

**:defndc** – The default network destination code.

**:dsm aud** – The DSM audit running state (*on* or *off*).

**:npcfmt1** – The ITU National Point Code Format Identifier, which identifies how the ITU-N point code is entered into the database and how it is displayed in all EAGLE 5 ISS outputs. This code is a 14-bit integer.

After successful completion of this command, the system returns the following output:

```
rlghncxa03w 01-10-07 00:57:31 GMT EAGLE 36.0.0
CHG-STPOPTS: MASP A - COMPLTD
```

- 82.** Verify the new country code and network destination code using the **rtrv-stpopts** command. This is an example of the possible output:

```
rlghncxa03w 01-10-07 00:57:31 GMT EAGLE 36.0.0
STP OPTIONS
-----
NPCFMTI          2-9-2-1
DEFCC             1
DEFNDC            38
DSMAUD            on
```

- 83.** Use the **chg-inpopts** command for number conditioning and INP/AINPQ normalization. Use this command for INP/AINPQ Query Services. For example, enter the following commands to enter a series of entries for the INPOPTS:

```
chg-inpopts:dra=rndn:dranp=e164:dranai=intl
chg-inpopts:cdpnfx=200
chg-inpopts:cdpnfx=fed123:dltprfx=yes
chg-inpopts:cdpnai=1:snai=sub
chg-inpopts:cdpnai=70:snai=intl
chg-inpopts:nec=1234
```

where:

**:cdpnai** – The called party prefix number nature of address indicator (0 to 127).

**:cdpnfx** – The called party prefix number (contains 1 to 15 characters, each of which is in the range of '0' to 'f').

**:dltprfx** – The delete prefix indicator (yes, no).

**:dra** – The destination routing address, where the values are *rn* (routing number), *rndn* (routing number and dialed number), *ccrndn* (country code and routing number and dialed number), and *rnecdn* (routing number and national escape code and dialed number).

**:dranai** – The nature of address indicator (*intl*, *sub*, *natl*, *ntwk*, *unknown*).

**:dranp** – The numbering plan mnemonic (*e164*, *x121*, *f69*).

## INP/AINPQ Feature Activation

**:nec** – National Escape Code (contains 1 to 5 characters, each of which is in the range of '0' to 'f').

**:snai** – The service nature of address indicator (*sub, natl, intl, none*).

**:sprestype** – Indicates what type of message the EAGLE 5 ISS is to send when an IDP message is received for INP service, the DN digits match, and the HLR ID is present. If the value is set to *connect*, the EAGLE 5 ISS is to send a “Connect” message for the INP feature or a “Return Result with Digits” message for the AINPQ feature. If the value is set to *continue*, the EAGLE 5 ISS is to send a “Continue” message for the INP feature or a “Return Result without Digits” message for the AINPQ feature. (Allowed values are *connect* and *continue*).

After successful completion of this command, the system returns this output:

```
rlghncxa03w 01-10-07 00:57:31 GMT EAGLE 36.0.0
CHG-INPOPTS: MASP A - COMPLTD
```

---

- 84.** Verify the changes using the `rtrv-inpopts` command. This command retrieves INP/AINPQ-specific options. Here is an example of the possible output.

```
rlghncxa03w 01-01-06 08:50:12 GMT EAGLE 36.0.0
rtrv-inpopts
Command Entered at terminal #1
;
rlghncxa03w 06-09-17 15:35:05 EST EAGLE 36.0.0
  INP OPTIONS
  -----
  NEC           = abc1d
  DRANAIV       = 126
  DRANP         = E164
  DRA           = CCRNDN
  SPRESTYPE     = CONTINUE

  CDPNPFX       DLTPFX
  -----      ---

  CDPNNAI       SNAI
  ---          ----
  127           unknown
;
```

---

- 85.** Add routing number prefixes for the operating network using the `ent-homern` command. Use this command to enter any Home RNs that are prefixed to DNs for incoming INP/AINPQ MR messages. You may use this command to enter up to 100 routing number prefixes for the operating network into the HOMERN table. For example, enter this command:

```
ent-homern:rn=c222
```

where:

**:rn** – The home routing number prefix. The range is 1 to 15 hex digits (0-F).

When this command has successfully completed, this message appears.

```
RLGHNCXA03W 01-10-07 00:28:31 GMT EAGLE 36.0.0
HOMERN table is (1 of 100) 1% full
ENT-HOMERN: MASP A - COMPLTD
```

---

- 86.** Verify the changes using the `rtrv-homern` command. This command retrieves a list of routing number prefixes that belong to the operating network. Here is an example of the possible output.

```
rlghncxa03w 01-10-28 00:29:31 GMT EAGLE 36.0.0
RN
-----
216780909087654
76345098
c10234567
c222
cabade
abc
abc123

HOMERN table is (6 of 100) 6% full
```

---

- 87.** Use the `ent-srvsel` command to enter the INP/AINPQ Service Selectors. You may use this command to assign the applicable service selectors required to specify the service entry for DSM services. For example, you can enter this command in these formats:

```
ent-srvsel:gtin=4:serv=inpvr:tt=0:nai=intl:np=e164:snai=rnidn
:snp=e164

ent-srvsel:gtin=4:serv=inpqs:tt=1:nai=intl:np=e164:snai=intl
:snp=e164
```

where:

**:gtii/gtin** – The Global Title Indicator. For all INP/AINPQ service selector commands, the domain is defined as **gtii** (ITU international) and **gtin** (ITU national). The supported range values for both **gtii** and **gtin** are 2 and 4.

**:serv** – The DSM service. The valid ranges are *inpqs* (INP/AINPQ query) and *inpvr* (INP Message Relay).

**:tt** – The Translation Type. The range is 0-255.

**:nai** – The Nature of Address indicator. The valid range indicators are: *sub* (subscriber number), *rsvd* (reserved for national use), *natl* (national significant number), and *intl* (international number).

**:np** – The Numbering Plan. The valid range indicators are: *e164* (ISDN/telephony numbering plan), *generic* (generic numbering plan), *x121* (data numbering plan), *f69* (Telex numbering plan), *e210* (Maritime numbering plan), *e212* (land mobile numbering plan), *e214* (ISDN/mobile numbering plan), and *private* (private network-specific numbering plan).

**:snai** – The Service Nature of Address Indicator. Valid range indicators are: *sub* (subscriber number), *natl* (national significant number), *intl* (international number), *rnidn* (routing number prefix and international dialed/directory number), *rnndn* (routing number prefix and national

dialed/directory number), *rmsdn* (routing number prefix and subscriber dialed/directory number).

**:snp** – The Service Numbering Plan. The valid mnemonic for INP/AINPQ is *e164*.

When this command has successfully completed, this message appears.

```
rlghncxa03w 01-10-07 00:28:31 GMT EAGLE 36.0.0
Service Selector table is (114 of 1024) 11% full
ENT-SRVSEL: MASP A - COMPLTD
```

- 88.** Verify the changes using the `rtrv-srvsel` command. This command retrieves a list of administered service selector combinations. Avoid lengthy output by filtering the list using various parameter combinations. (The selector table can have over 1,000 entries.) For example, enter this command:

```
rtrv-srvsel:gtin=4
```

where:

**:gtin** – The Global Title Indicator for a defined domain of ITU national. The range is *2* or *4*.

This is an example of the possible output for the command:

```
rlghncxa03w 01-10-28 00:29:31 GMT EAGLE 36.0.0
GTIN TT NP NAI NPV NAIV SNP SNAI SERV
4 0 e164 intl --- --- e164 rnidn inpmr
4 1 e164 intl --- --- e164 intl inpq
```

- 89.** Use the Allow Mated Application Subsystem command (`alw-map-ss`) for INP/AINPQ Query Services to activate the INP/AINPQ subsystem and bring it online. You can allow and inhibit the INP/AINPQ Query Services subsystem. The command requires a parameter that identifies the SSN to be allowed. That subsystem must be out-of-service maintenance-disabled (OOS-MT-DSBLD) for the command to be accepted. For example, enter this command:

```
alw-map-ss:ssn=12
```

where:

**:ssn** – The INP/AINPQ Subsystem Number. The range is *2-255*.

When this command has successfully completed, this message appears.

```
rlghncxa03w 01-10-24 00:28:31 GMT EAGLE 36.0.0
Local Subsystem has been allowed.
Command Completed.
```

90. Verify the activation of the INP/AINPQ subsystem by the previous command using the Report Status SCCP command `rept-stat-sccp`. This command displays the status of the DSMs running the SCCP application, and also displays cards that are denied SCCP service. If you issue the command without parameters, it displays the status of the VSCCP cards and the GTT and INP/AINPQ services executing on those cards.

This is an example of the possible output for the command `rept-stat-sccp`:

```
rlghncxa03w 01-10-28 00:29:31 GMT EAGLE 36.0.0
SCCP SUBSYSTEM REPORT IS-NR Active -----
GSM SUBSYSTEM REPORT IS-NR Active -----
INP SUBSYSTEM REPORT IS-NR Restricted -----
ASSUMING MATE'S LOAD
INPQ: SSN STATUS = Allowed MATE SSN STATUS = Prohibited
...
```



**CAUTION:** When you have an in-service environment and you are replacing TSM cards with DSM cards, initialize one DSM card at a time. Verify its return to IS-NR state before initializing another DSM card. This precaution keeps cards in service and precludes an interruption of SCCP services.

**NOTE:** GTT, EGTT, and VGTT traffic are routed based on the global titles in the OAM database while G-Flex, G-Port, A-Port, AINPQ, and INP traffic is routed based on the global title in the RTDB. Rebooting a DSM card running the VSCCP application causes both the OAM and RTDB databases on the DSM card to reload.

91. Reload a DSM card using the `init-card` command. For example, enter this command:

```
init-card:loc=1101
```

The system returns the following message:

```
rlghncxa03w 01-10-07 00:28:31 GMT EAGLE 36.0.0
Command entered at terminal #3.
Init Card command issued to card 1101
```

92. Verify its return to IS-NR state with the `rept-stat-card` command. (Wait until in-service state is restored.) This is an example of the possible output:

```

RLGHNCXA03W 01-10-07 00:30:42 GMT EAGLE 36.0.0
CARD  VERSION                TYPE  APPL  PST          SST      AST
1101  100-000-00003-000      DSM   VSCCP  IS-NR       Active   ---
1103  100-000-00002-000      ACMENET STPLAN  IS-NR       Active   ---
1104  100-000-00003-000      ASM    GLS     IS-NR       Active   ---
1105  100-000-00003-000      LIMOCU CCS7ITU IS-NR       Active   ---
1106  100-000-00003-000      LIMOCU CCS7ITU IS-NR       Active   ---
1107  100-000-00003-000      DSM   VSCCP  IS-NR       Active   ---
1113  100-000-00002-000      MCAP   OAM     IS-NR       Active   ---
1114  100-000-00002-000      TDM    IS-NR       Active   ---
1115  100-000-00002-000      MCAP   OAM     IS-NR       Active   ---
1116  100-000-00002-000      TDM    IS-NR       Active   ---
1117  100-000-00002-000      MDAL   IS-NR       Active   ---
1201  100-000-00003-000      LIMDS0 SS7ANSI  IS-NR       Active   ---
1202  100-000-00002-000      LIMV35 SS7GX25  IS-NR       Active   ---
1203  100-000-00003-000      LIMV35 SS7ANSI  IS-NR       Active   ---
1204  100-000-00003-000      LIMATM ATMANSI  IS-NR       Active   ---
1205  100-000-00001-000      DCM    IPLIM   IS-NR       Active   ---
1207  100-000-00001-000      DCM    SS7IPGW IS-NR       Active   ---
1303  100-000-00001-000      DCM    IPLIM   IS-NR       Active   ---
1305  100-000-00001-000      DCM    SS7IPGW IS-NR       Active   ---

```

93. After the `init-card` and the `rept-stat-card` commands show that service is successfully restored, repeat steps 91 and 92 for each DSM card in your system.

94. Confirm that essential activation procedures are successful.

- Use `rept-stat-sccp` to verify all your DSM cards are loaded and are IS-NR (in-service normal) status.
- Use `rept-stat-mps` to verify all your DSM cards and the EPAP are connected and operational.
- Use `rept-stat-db:display=all` to verify database levels are identical for the EPAP PDB and RTDB and the RTDBs on the DSM cards.

The INP feature or AINPQ feature or both features are now installed, activated, and ready for operations.



# Maintenance and Measurements

Introduction.....	5-1
Maintenance Requirements.....	5-1
EPAP Status and Alarm Reporting .....	5-2
GSM and INP/AINPQ System Hardware Verification .....	5-5
GSM System and INP/AINPQ System Status Reporting .....	5-7
Code and Application Data Loading.....	5-8
INP/AINPQ Subsystem Related Alarms.....	5-15
INP/AINPQ Subsystem Related UIMs.....	5-24
INP/AINPQ Measurements .....	5-25

## Introduction

This chapter describes the changes and alterations to the EAGLE 5 ISS for implementing the Maintenance and Measurements for the INP and AINPQ features. This chapter also provides an overview of the interaction between the EPAP in the MPS subsystem and the EAGLE 5 ISS.

## Maintenance Requirements

Maintenance supports the INP and AINPQ features by providing these functions.

- EPAP status and alarm reporting
- DSM status reporting to the EPAP
- GSM and INP/AINPQ system hardware verification
- GSM and INP/AINPQ system status reporting

- Commands
- Code and application data loading
- Feature Related Alarms
- Measurements

These measurement and maintenance functions for INP and AINPQ are described in the following pages.

### EPAP Status and Alarm Reporting

The EPAPs have no direct means of accepting user input or displaying output messages on EAGLE 5 ISS terminals, so Maintenance, Measurements, and Status information must be routed through a DSM card. The EPAP sends two types of messages to the DSM:

- EPAP maintenance blocks
- DSM status requests

#### EPAP Maintenance Blocks

The active EPAP generates and sends maintenance blocks to the primary DSM. One maintenance block is sent as soon as the IP link is established between the active EPAP and the primary DSM. Additional maintenance blocks are sent whenever the EPAP needs to report any change in status or error conditions. The information returned in maintenance blocks is included in the output of the `rept-stat-mps` and `rept-stat-sccp` commands.

The EPAP sends maintenance blocks that contain (at least) the following information.

- Status of EPAP 'A' - actual states are active, standby, and down (inoperative). Maintenance blocks include a field so this information can be forwarded to the EPAP A Device Control Block (DCB), where it is available for the output of the `rept-stat-mps` command.
- Status of EPAP 'B' - actual states are active, standby, and down (inoperative). Maintenance blocks include a field so this information can be forwarded to the EPAP B DCB, where it is available for the output of the `rept-stat-mps` command.
- Identification of active EPAP - a field to identify the active EPAP.

## Maintenance and Measurements

- Congestion indicator - an indicator showing provisioning link congestion. The link between the EPAPs and the external source of provisioning data can become congested in high provisioning traffic situations. When this occurs and subsequently as the congestion clears, the EPAP sends maintenance blocks to the DSM. The EPAP must ensure that no more than one maintenance block per second is sent to the primary DSM if the only reason is to report a change in congestion status.
- Alarm conditions - an error code field. If the EPAP needs to report an alarm condition, it puts an appropriate UAM identifier in this field.
- Current MPS database size - a field indicating the current RTDB size. The DSM uses this information to calculate the percentage of memory utilized by the RTDB.

## DSM Status Requests

When the EPAP needs to know the status of a DSM, it sends a DSM status request to that DSM. Since status messages are sent over the UDP, the EPAP broadcasts the DSM status request, and each DSM returns its status to the EPAP.

## Status Reporting to the EPAP

The sections that follow describe the DSM status reporting for the EPAP.

### DSM Status Messages – When Sent

The EPAP needs to know the current status of various aspects of the DSMs. Accordingly, DSMs send a DSM status message to the EPAP when the following events occur in the DSM whenever:

- The DSM is booted.
- When the DSM receives a DSM Status Request message from the EPAP.
- When the DSM determines that it needs to download the entire database, for example, if the DSM determines that the RTDB needs to be downloaded (for instance, if the database is totally corrupted), or if a craftsperson requests that the database be reloaded.
- When the DSM starts receiving DB downloads or DB updates. When the DSM card(s) starts downloading the RTDB, or if the DSM starts accepting database updates, it needs to send a status message informing the EPAP of the first record received. This helps the EPAP keep track of downloads in progress.

## DSM Status Messages Fields

The DSM status message provides the following information to the EPAP:

- **DSM Memory Size.** When the DSM is initialized, it determines the amount of applique memory present. The EPAP uses the value to determine if the DSM has enough memory to hold the RTDB.  
Refer to the *Dimensioning Guide for EPAP Advanced DB Features Technical Reference* for important information on the dimensioning rules and the DSM database capacity requirements.
- **Load Mode Status.** This indicator indicates whether 80% of the IS-NR (in service normal) LIMs have access to SCCP services.
- **Database Level Number.** The EPAP maintains a level number for the RTDB. Each time the database is updated, the level number is incremented. When the database is sent to the DSM, the DSM keeps track of the database level number. The database level number is included in all status messages that the DSM sends. Level number 0 signifies that no database has been loaded into the DSM; this occurs whenever the DSM requests a full database download.
- **Database Download Starting Record Number.** When the DSM starts downloading either an entire RTDB or just updates to the database, it identifies the starting record number. This lets the EPAP know when to wrap around the end of the file and when the DSM has finished receiving the file or updates.

## Hourly Maintenance Report

The Hourly Maintenance Report, generated automatically, includes the alarm totals of the INP/AINPQ subsystem and DSM/EPAP IP links. A sample follows.

```
eagle10506 06-10-10 16:00:01 EST EAGLE 36.0.0
5072.0000 REPT COND GSM SS
"GSM SS :0440,MTCEINT-0,SA,99-10-10,16:00:01,,,,*C"
;
eagle10506 06-10-10 16:00:01 EST EAGLE 36.0.0
5073.0000 REPT COND INP SS
"INP SS :0440,MTCEINT-0,SA,99-10-10,16:20:01,,,,*C"
;
eagle10506 06-10-10 16:00:01 EST EAGLE 36.0.0
5077.0000 REPT COND EPAPDSM
"EPAPDSM :0084,MTCEINT-0,SA,99-10-10,16:00:01,,,,**"
;
eagle10506 06-10-10 16:00:01 EST EAGLE 36.0.0
5007.0000 REPT COND CARD
"CARD 1102:0422,SCMMA,SA,99-10-10,16:00:01,,,,**"
;
eagle10506 06-09-13 16:00:01 EST EAGLE 36.0.0
3561.0000 REPT COND ALARM STATUS
"ALARMS:PERM. INHIBITED,0,0,0"
"ALARMS:TEMP. INHIBITED,0,0,0"
"ALARMS:ACTIVE,10,14,3"
"ALARMS:TOTAL,10,14,3"
;
```

## **GSM and INP/AINPQ System Hardware Verification**

DSM card loading also verifies the validity of the hardware configuration for DSM cards. The verification of the hardware includes:

- Validity of the main board
- Verification of applique memory size

### **DSM Main Board Verification**

An AMD-K6 (or better) main board is required to support the INP/AINPQ VSCCP (VxWorks Signalling Connection Port) application on the DSM card. EAGLE 5 ISS maintenance stores the validity status of the VSCCP card's main board configuration. The EAGLE 5 ISS prevents the INP and AINPQ features from being enabled if the hardware configuration is invalid.

When the VSCCP application is being initialized, it determines the main board type. The SCCP maintenance block relays the main board information to OAM. This requires the application software to be loaded to the VSCCP card; then verification of the main board information is received in the SCCP maintenance block. If the main board is determined to be invalid for the INP or AINPQ application, loading the VSCCP card is automatically inhibited, and the card is booted via PMTC (Peripheral Maintenance).

### **DSM Applique Memory Verification**

The VSCCP application performs two types of memory validation to determine whether a DSM has enough memory to run INP and/or AINPQ.

#### **1. Local Memory Validation**

When the INP FAK is first enabled, or when the INPQ feature is enabled and the DSM is initializing, the VSCCP checks to see if the DSM has at least one D1G applique. The INP FAK cannot be enabled if any DSM has less than 1GB of memory installed.

When the AINPQ FAK is first enabled, or when the AINPQ feature is enabled and the DSM is initializing, the VSCCP checks to see if the DSM has at least one D1G applique. The AINPQ FAK cannot be enabled if any DSM has less than 4GB of memory installed.

#### **2. Real-time Memory Validation**

When communication is established between the DSM and EPAP and the DSM has joined the RMTP tree, the EPAP starts downloading its copy of the

RTDB to the DSM. The EPAP includes the size of the current RTDB in all records sent to the DSM.

The DSM compares the size required with the amount of installed memory; it issues a minor alarm if the database exceeds 80% of the DSM memory. If the database completely fills the DSM memory, an insufficient memory alarm is issued, the DSM leaves the RMTP tree, and the DSM status changes to IS-ANR/Restricted.

### **Actions Taken When Hardware Determined to be Invalid**

When the hardware configuration for a DSM card is determined to be invalid for the INP and/or AINPQ application, the SCM (System Configuration Manager) automatically inhibits loading that specific DSM card. A major alarm is generated, indicating that card loading for that DSM card has failed and has been automatically inhibited, that is, prevented from reloading again. See “Card Related MPS Alarms” on page 5-19 for information about the alarms that are generated.

When card loading is inhibited, the primary state of the card is set to OOS-MT-DSBLD and the secondary state of the card is set to MEA (Mismatch of Equipment and Attributes).

The following actions apply to a DSM card determined to be invalid:

- The DSM does not download the EAGLE 5 ISS (STP) databases.
- The DSM does not download the Real Time Database from the EPAP.
- The DSM does not accept Real Time Database updates (such as *add*, *change*, *delete*) from the EPAP.

To activate loading of a DSM card which has been automatically inhibited, the craftsperson must enter command `alw-card:loc=xxxx`.

### **Unstable Loading Mode**

At some point, having some number of invalid DSM cards results in some of the LIMs being denied SCCP services. A threshold must be monitored; if the number of valid DSMs is insufficient to provide service to at least 80% of the in-service (IS-NR) LIMs, the system is in an unstable loading mode. There are other reasons why an EAGLE 5 ISS might be in an unstable Loading Mode; refer to “Loading Mode Support” on page 5-9 for further information.

## GSM System and INP/AINPQ System Status Reporting

### System Status Reporting

The `rept-stat-sys` command supports the DSM cards running the VSCCP application. Refer to “rept-stat-sys” on page 3-5 for more details on the `rept-stat-sys` command changes.

The `rept-stat-sccp` command supports the DSM cards running the VSCCP application and reports INP/AINPQ statistics. Refer to “rept-stat-sccp” on page 3-5 for more details on the `rept-stat-sccp` command changes.

### GSM Status Reporting

The `rept-stat-mps` command is a new command that supports reporting of GSM system. This command concentrates on reporting the status of the GSM and INP provisioning system. Refer to “rept-stat-db” on page 3-11 for more details on the `rept-stat-mps` command.

### INP/AINPQ Status Reporting

The `rept-stat-mps` command is a new command that supports reporting of INP/AINPQ system. This command concentrates on reporting the status of the GSM and INP/AINPQ provisioning system. Refer to “rept-stat-db” on page 3-11 for details on the `rept-stat-mps` command. INP statistics are placed in the `rept-stat-sccp` command.

### DSM Memory Capacity Status Reporting

As described in “Status Reporting to the EPAP” on page 5-3, the DSM sends a message to the EPAP defining the DSM board memory size. The EPAP determines whether the DSM has enough memory to store the RTDB and responds to the DSM with an Ack or Nak, indicating whether the DSM memory is large enough.

When the EPAP sends database updates to the DSMs, the update messages include a field that contains the new database memory requirements. Each DSM monitors the database size requirements, and issues a minor alarm if the size of the database exceeds 80% of its memory. If a database increases to the point that it occupies 100% of the DSM memory, an insufficient memory major alarm is issued.

The `rept-stat-mps:loc=xxxx` command displays the amount of memory used by the RTDB as a percent of available DSM memory.

## Loading Mode Support Status Reporting

The OAM application can determine whether the system is in an unstable loading mode because it knows the state of all LIM, SCCP, and DSM cards in the system. When the loading mode is unstable, the `rept-stat-sys` command reports the existence of the unstable loading mode and the specific conditions that caused it. See “Loading Mode Support” on page 5-9 for additional information.

## Code and Application Data Loading

In general, administrative updates can occur while a DSM card is loading. The DSM card should also remain in an in-transition state if the EAGLE 5 ISS portion of the database has completed loading and is waiting for the RTDB to download.

### DSM Code Loading

The EAGLE 5 ISS OAM performs code loading of the DSM card.

### DSM Application Data Loading

The INP and AINPQ features require that new TDM-resident data tables be loaded in addition to those currently supported by EAGLE 5 ISS. The GPL and data loading support this additional table loading while maintaining support for loading the existing EAGLE 5 ISS tables.

In order to support both RTDB and EAGLE 5 ISS data loading, the VSCCP GPL verifies its hardware configuration during initialization to determine if it has the capacity to support the RTDB.

The VSCCP GPL application data loader registers all tables for loading, independent of the INP/AINPQ feature provisioning and main board/applique hardware configuration. As a result, load requests are always identical. During loading, multiple DSM load requests are combined into a single download, reducing the overall download time. The DSM card stores or discards RTDB table data based on whether or not it has RTDB-capable hardware for features like G-Port, A-Port, G-Flex, INP, and AINPQ.

The OAM, on the other hand, downloads the INP OPTS, HOMERN, and SERV SEL tables only if the INP or AINPQ feature is provisioned. When neither the INP feature nor the AINPQ feature is provisioned, the OAM does not attempt to read these tables from disk. Instead, empty tables (i.e., tables without entries) are downloaded. All other tables requested for loading are read from disk and downloaded routinely.

## Maintenance and Measurements

### Non-GSM Data Initialization

If the DSM card hardware configuration cannot support the RTDB, the GSM tables and INP/AINPQ tables are marked as absent during Service Management System (SMS) initialization. Memory is not reserved for the GSM table data. Also, GSM tables are registered with the application data loader (ADL) specifying a data discard function. GSM table data is discarded during loading by the ADL discard function, rather than storing it in memory.

### GSM Data Initialization

If the DSM card detects INP/AINPQ-capable hardware, the GSM and INP/AINPQ tables are registered with ADL specifying a data load function. Any INP/AINPQ table data downloaded is stored in memory during loading.

### EPAP - DSM Loading Interface

The DSM must convey to the EPAP that it needs to download the RTDB. This occurs when the DSM sends a Full Download Request message to the EPAP.

### Loading Mode Support

No more than 16 LIMs can be serviced by each SCCP (or VSCCP) card.

### 80% Threshold of Support

Loading mode is based on the ability of the system to provide SCCP service to at least 80% of the LIMs.

### VSCCP Capacity

An insufficient number of VSCCP cards that are `is-nr` or `oos-mt-dsbl` relative to 80% of the number of provisioned LIMs is called a “failure to provide adequate SCCP capacity.”

### Insufficient SCCP Service

It is also possible for LIMs or VSCCP cards to be inhibited or to have problems that prevent them from operating normally. If enough VSCCP cards are out of service, it may not be possible for the remaining `is-nr` VSCCP cards to service at least 80% of the number of `is-nr` LIMs. This is called “insufficient SCCP service.” When this occurs, some of the LIMs are denied SCCP service. It is possible to inhibit LIMs to bring the ratio back to 16:1 (or better).

### Conditions That Create an Unstable Loading Mode

Current system implementation interrupts and aborts card loading upon execution of an EAGLE 5 ISS database `chg` command. Loading mode support denies the execution of EAGLE 5 ISS database `chg` commands when the system is in an unstable loading mode. An unstable loading mode exists when any of the following conditions are true:

- The system's maintenance baseline has not been established.
- Less than 80% of the number of LIMs provisioned are `is-nr` or `oos-mt-dsbl'd`.
- The number of `is-nr` and `oos-mt-dsbl'd sccp` cards is insufficient to service at least 80% of all provisioned LIMs.
- Insufficient SCCP service occurs when an insufficient number of `is-nr` VSCCP cards are available to service at least 80% of the number of `is-nr` LIMs.
- LIM cards are being denied SCCP service and any VSCCP cards are in an abnormal state (`oos-mt`, `is-anr`).

### Actions Taken When the System is in an Unstable Loading Mode

- No affect on RTDB downloads or updates.

Unstable loading mode has no impact on RTDB downloads or the stream of RTDB updates.

- `rept-stat-sys` reports unstable loading mode.

When the loading mode is unstable, the `rept-stat-sys` command reports the existence of the unstable loading mode and the specific trigger that caused it.

- No EAGLE 5 ISS database updates allowed.

When in an unstable loading mode, the EAGLE 5 ISS does not accept database updates. When updates are rejected, the reason is given as: `E3112 Cmd Rej: Loading Mode unstable due to SCCP service is deficient.`

The `inh-card` and `alw-card` commands can be used to alter SCCP service levels to achieve the 80% threshold. This can be repeated for each card until the system is able to supply SCCP services to at least 80% of the `is-nr` LIMs. The remaining 20% LIM or supporting VSCCP cards may remain out of service until the stream of EAGLE 5 ISS database updates ceases. This stream of updates can be temporarily interrupted to allow the remaining 20% of the system to come in service.

Once the EAGLE 5 ISS database has been loaded, that database can be updated (as long as the system is not in an unstable loading mode). However, if an update comes in during EAGLE 5 ISS database loading, the DSM aborts

the current loading, issues a class 01D7 obit, and reboots. Figure 5-1 shows an example.

**Figure 5-1. Obit Message for Abort of Card Loading**

```

tekelecstp 06-10-08 12:29:04 EST EAGLE 36.0.0
-----
Card 1317 Module RADB_MGR.C Line 337 Class 01d7
Card 1317 Module RADB_MGR.C Line 337 Class 01d7
Register Dump :
  EFL=00000246   CS =0058       EIP=0000808d   SS =0060
  EAX=000a6ff3   ECX=000a0005   EDX=00000000   EBX=000a6fa0
  ESP=00108828   EBP=0010882c   ESI=001f1e10   EDI=00000000
  DS =0060       ES =0060       FS =0060       GS =0060

Stack Dump :
[SP+1E]=001f   [SP+16]=0000   [SP+0E]=000a   [SP+06]=0010
[SP+1C]=1e10   [SP+14]=0004   [SP+0C]=6fa0   [SP+04]=8850
[SP+1A]=0010   [SP+12]=001f   [SP+0A]=0004   [SP+02]=0001
[SP+18]=886c   [SP+10]=4928   [SP+08]=7ec3   [SP+00]=504b

User Data Dump :

14 02 fa ed 01 01 1d 01 5a 01 00           .....Z...

Report Date:97-04-08 Time:12:29:04

```

**Using the force Option**

Use the **force** option to execute commands that would put the system in unstable loading mode. If executing the **ent-card** or **inh-card** commands would cause the system to enter an unstable loading mode, use the **force** option on the command.


**State Transitions during Start-Up**

Figures 5-2 through 5-9 show the transitions that a DSM card goes through as it boots, loads code and data, and runs various VSCCP services. These figures do not illustrate every possible situation, but they do include the most common scenarios.

**NOTE: These scenarios show the INP feature. Similar scenarios exist for the AINPQ feature, except that the minimum DSM memory size is 4 GB for the AINPQ feature.**


In Figure 5-2, the INP feature is not enabled, and the DSM card can operate in TSM emulation mode, although it does not provide INP operation.

**Figure 5-2.** INP Not Enabled, DSM Running in TSM Emulation

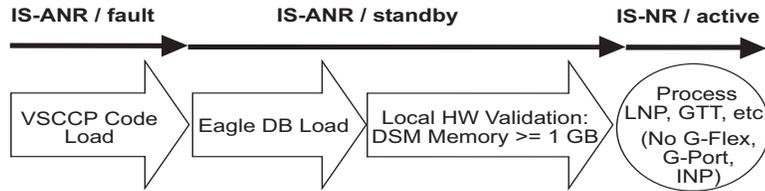


In Figure 5-3, the INP feature is enabled, and the DSM card memory is at least 1GB and is connected to the EPAP. A normal DSM card operating sequence occurs, providing INP service.

**Figure 5-3.** INP Enabled, Normal Operating Sequence

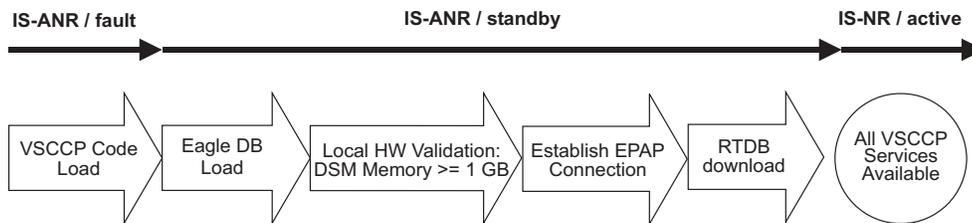


In Figure 5-4, the INP feature is enabled, but the DSM card memory is less than 1GB. The INP feature cannot begin operation. Refer to the *Dimensioning Guide for EPAP Advanced DB Features Technical Reference* for important information on the dimensioning rules and the DSM database capacity requirements.

**Figure 5-4.** INP Enabled, but DSM Memory Less Than 1GB

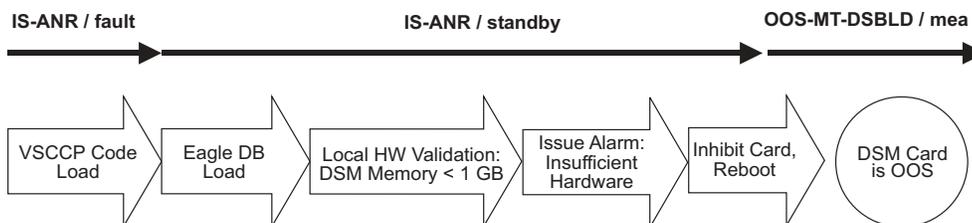


In Figure 5-5, the INP feature is enabled, the DSM card memory has at least 1GB, but the DSM card is unable to connect to the EPAP. The INP feature cannot begin operation.

**Figure 5-5.** INP Enabled, but DSM Not Connected to EPAP

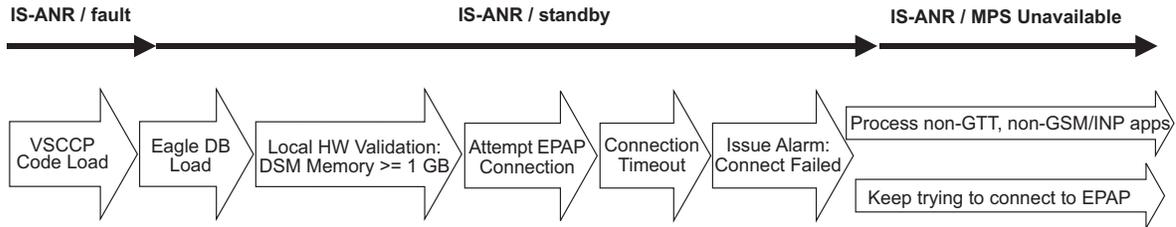

In Figure 5-6, the INP feature is enabled, the DSM card has the required 1GB memory and is connected to the EPAP, but the DSM card is too small for the required database. The INP feature cannot begin operation. Refer to the *Dimensioning Guide for EPAP Advanced DB Features Technical Reference* for important information on the dimensioning rules and the DSM database capacity requirements.


**Figure 5-6.** INP Enabled, but DSM Memory Insufficient for Database

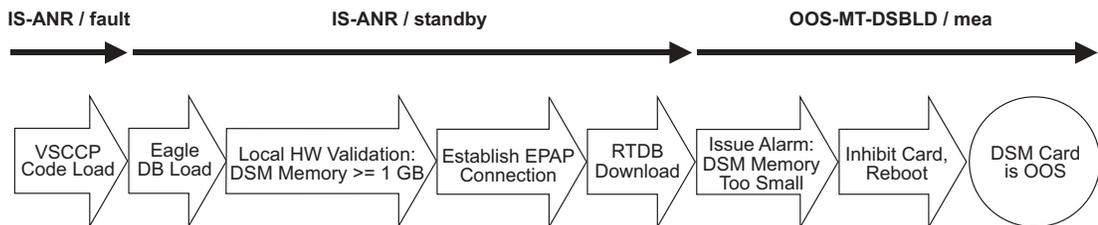

In Figure 5-7, the INP feature is enabled, the DSM card is connected to the EPAP, but the RTDB grows eventually to exceed the capacity of the DSM card memory, despite its memory size of at least 1GB (an alarm is issued when the DSM memory becomes full from the RTDB update). The INP feature cannot begin operation.


Refer to the *Dimensioning Guide for EPAP Advanced DB Features Technical Reference* for important information on the dimensioning rules and the DSM database capacity requirements.

**Figure 5-7.** INP Enabled, but Database Exceeds DSM Memory

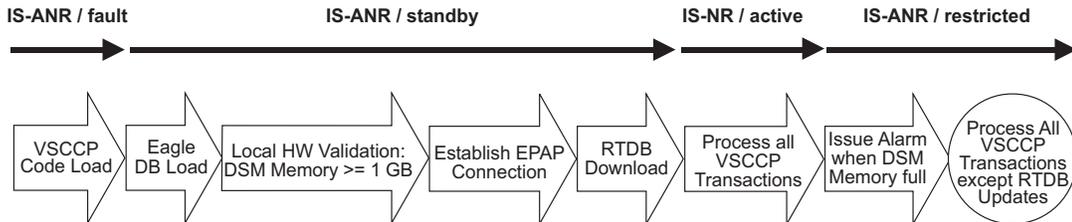

In Figure 5-8, the INP feature is not initially enabled; the DSM card memory has at least 1GB but no EPAP connection; the DSM card is running other applications when the INP feature is turned on. The DSM has sufficient memory to provide the INP feature service.


**Figure 5-8.** INP Not Enabled at First, but then Activated on DSM

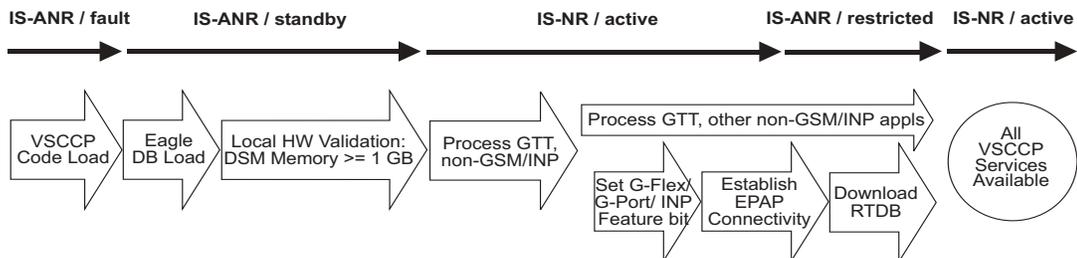

## Maintenance and Measurements

In Figure 5-9, the INP feature is not initially enabled; the DSM card memory has at least 1GB but no EPAP connection, and is running other applications when the INP feature is turned on. However, the DSM card memory is insufficient for the needed database, and cannot perform the INP feature operation. Refer to the *Dimensioning Guide for EPAP Advanced DB Features Technical Reference* for important information on the dimensioning rules and the DSM database capacity requirements.

**Figure 5-9.** INP Activation Unsuccessful due to Insufficient Database

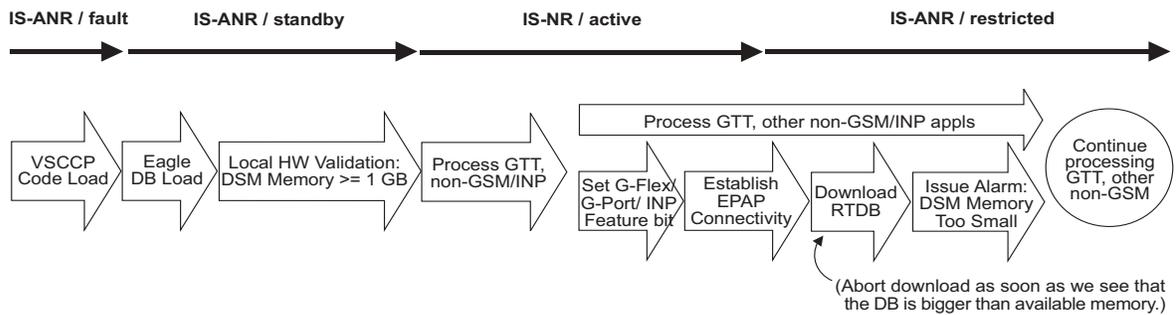

## INP/AINPQ Subsystem Related Alarms

Refer to the *EAGLE 5 ISS Maintenance Manual* for a complete description and the associated corrective procedure for all INP/AINPQ related UAMs.

Refer to the *EAGLE 5 ISS Maintenance Manual* for more information and corrective procedures for the EAGLE 5 ISS related alarms. Refer to the *EAGLE 5 ISS-Tekelec 1000 AS MPS Platform Software and Maintenance Manual* for more information and corrective procedures for the MPS related alarms.

**Table 5-1.** INP/AINPQ Subsystem Related UAMs

UAM	Severity	Message Text	MPS or EAGLE 5 ISS
0013	Major	Card is isolated from the system	EAGLE 5 ISS
0084	Major	IP Connection Unavailable	EAGLE 5 ISS
0085	None	IP Connection Available	EAGLE 5 ISS
0099	Major	Incompatible HW for provisioned slot	EAGLE 5 ISS
0250	None	MPS available	MPS
0261	Critical	MPS unavailable	MPS
0328	None	SCCP is available	EAGLE 5 ISS

**Table 5-1.** INP/AINPQ Subsystem Related UAMs (Continued)

<b>UAM</b>	<b>Severity</b>	<b>Message Text</b>	<b>MPS or EAGLE 5 ISS</b>
0329	None	SCCP capacity normal, card(s) abnormal	EAGLE 5 ISS
0330	Major	System SCCP TPS Threshold exceeded	EAGLE 5 ISS
0331	Critical	SCCP is not available	EAGLE 5 ISS
0335	None	SCCP is removed	EAGLE 5 ISS
0336	Major	LIM(s) have been denied SCCP service	EAGLE 5 ISS
0370	Critical	Critical Platform Failure(s)	MPS
0371	Critical	Critical Application Failure(s)	MPS
0372	Major	Major Platform Failure(s)	MPS
0373	Major	Major Application Failure(s)	MPS
0374	Minor	Minor Platform Failure(s)	MPS
0375	Minor	Minor Application Failure(s)	MPS
0394	None	Local Subsystem is available	EAGLE 5 ISS
0395	Critical	Local Subsystem is not available	EAGLE 5 ISS
0396	Critical	Local Subsystem is disabled	EAGLE 5 ISS
0397	None	Local Subsystem is removed	EAGLE 5 ISS
0398	Minor	Local Subsystem normal, card(s) abnormal	EAGLE 5 ISS
0422	Major	Insufficient extended memory	EAGLE 5 ISS
0423	None	Card reload attempted	EAGLE 5 ISS
0441	Major	Incorrect MBD - CPU	EAGLE 5 ISS
0442	Critical	RTDB database capacity is 95% full	EAGLE 5 ISS
0443	Major	RTDB database is corrupted	EAGLE 5 ISS
0444	Minor	RTDB database is inconsistent	EAGLE 5 ISS
0445	None	RTDB database has been corrected	EAGLE 5 ISS
0446	Major	RTDB Database capacity is 80% full	EAGLE 5 ISS
0447	None	RTDB database capacity alarm cleared	EAGLE 5 ISS
0448	Minor	RTDB database is incoherent	EAGLE 5 ISS
0449	Major	RTDB resynchronization in progress	EAGLE 5 ISS
0451	Major	RTDB reload is required	EAGLE 5 ISS

## Maintenance and Measurements

### DSM-EPAP Link

Two alarms are used to indicate the DSM-to-EPAP link status. Refer to the *EAGLE 5 ISS Maintenance Manual* for more information and corrective procedures for the following alarms.

- **UAM 0084** - IP Connection Unavailable

This message indicates that an IP application socket is out of service due to a IP link down (Ethernet problem) or due to the DSM card.

```
station1234 06-09-30 16:28:08 EST EAGLE 36.0.0
** 5676.0084 ** DSM B 1101 IP Connection Unavailable
```

- **UAM 0085** - IP Connection Available

This message indicates that a previously broken link between the EPAP and DSM card is now functioning properly.

```
station1234 06-09-30 16:28:08 EST EAGLE 36.0.0
5676.0085 DSM B 1101 IP Connection Available
```

### MPS (EPAP) Alarms

The following alarms are output on the EAGLE 5 ISS and include an alarm data string in the output. Refer to the *EAGLE 5 ISS -Tekelec 1000 AS MPS Platform Software and Maintenance Manual* (except where noted) for more information and corrective procedures for the following MPS related alarms. The MPS (EPAP) alarms are output to the MPS Output Group.

- **UAM 0250** - MPS available

This indicates that a previous MPS platform association loss has been reestablished and is currently functioning properly.

Example:

```
station1234 06-09-30 16:28:08 EST EAGLE 36.0.0
0259.0250 MPS B MPS available
```

- **UAM 0261** - MPS unavailable

This message indicates that the EAGLE 5 ISS is unable to communicate with the MPS or the MPS has an internal failure. Refer to the *EAGLE 5 ISS Maintenance Manual* for the corrective action procedure.

Example:

```
station1234 06-09-30 16:28:08 EST EAGLE 36.0.0
*C 0259.0261 *C MPS B MPS unavailable
```

- **UAM 0370** - Critical Platform Failure (s)

This message indicates the application running in the MPS server has detected a critical platform failure. The Alarm Data in the message contains a 16-character hexadecimal string in the format of h'1xxxxxxxxxxxxxxx'. This alarm will be reset when UAM #250, MPS Available is issued.

Example:

```
station1234 06-09-30 16:28:08 EST EAGLE 36.0.0
*C 0259.0370 *C MPS B Critical Platform Failure(s)
ALARM DATA = h'1000000000000008'
```

- **UAM 0371 - Critical Application Failure (s)**

This message indicates the application running in the MPS server has detected a critical application failure. The Alarm Data in the message contains a 16-character hexadecimal string in the format of h'2xxxxxxxxxxxxxx'. This alarm will be reset when UAM #250, MPS Available is issued.

Example:

```
station1234 06-09-30 16:28:08 EST EAGLE 36.0.0
*C 0259.0371 *C MPS B Critical Application Failure(s)
ALARM DATA = h'2000000000000001'
```

- **UAM 0372 - Major Platform Failure (s)**

This message indicates the application running in the MPS server has detected a major platform failure. The Alarm Data in the message contains a 16-character hexadecimal string in the format of h'3xxxxxxxxxxxxxx'. This alarm will be reset when UAM #250, MPS Available is issued.

Example:

```
station1234 06-09-30 16:28:08 EST EAGLE 36.0.0
** 0259.0372 ** MPS B Major Platform Failure(s)
ALARM DATA = h'3000000000000002'
```

- **UAM 0373 - Major Application Failure (s)**

This message indicates the application running in the MPS server has detected a major application failure. The Alarm Data in the message contains a 16-character hexadecimal string in the format of h'4xxxxxxxxxxxxxx'. This alarm will be reset when UAM #250, MPS Available is issued.

Example:

```
station1234 06-09-30 16:28:08 EST EAGLE 36.0.0
** 0259.0373 ** MPS B Major Application Failure(s)
ALARM DATA = h'4000000000000008'
```

- **UAM 0374 - Minor Platform Failure (s)**

This message indicates the application running in the MPS server has detected a minor platform failure. The Alarm Data in the message contains a 16-character hexadecimal string in the format of h'5xxxxxxxxxxxxxx'. This alarm will be reset when UAM #250, MPS Available is issued.

Example:

```
station1234 06-09-30 16:28:08 EST EAGLE 36.0.0
* 0259.0374 * MPS B Minor Platform Failure(s)
ALARM DATA = h'5000000000000004'
```

- **UAM 0375 - Minor Application Failure (s)**

## Maintenance and Measurements

This message indicates the application running in the MPS server has detected a minor application failure. The Alarm Data in the message contains a 16-character hexadecimal string in the format of h'6xxxxxxxxxxxxxxxx'. This alarm will be reset when UAM #250, MPS Available is issued.

Example:

```
station1234 06-09-30 16:28:08 EST EAGLE 36.0.0
* 0259.0375 * MPS B Minor Application Failure(s)
ALARM DATA = h'6000000000000001'
```

## Card Related MPS Alarms

The following alarms are output on the EAGLE 5 ISS. Refer to the *EAGLE 5 ISS Maintenance Manual* for more information and corrective procedures for the following card related MPS alarms. The Card Related MPS alarms are output to the Card Output Group.

- **UAM 0013** - Card is isolated from the system

This indicates a card has become isolated and is unable to communicate to other cards in the system. This could be caused by a defective card, a power failure occurred on the card, or the system software has ordered a reset.

This also appears when the card has been manually reset by a command.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
** 0012.0013 ** CARD 1101 SCCP Card is isolated from the system
ASSY SN: 102199815a1234
```

- **UAM 0099** - Incompatible HW for provisioned slot

This indicates a DCM or DSM card does not have an extended memory. This card is automatically inhibited.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
** 0012.0099 ** CARD 1101 VSCCP Incompatible hardware for provisioned slot
ASSY SN: 102199815a1234
```

- **UAM 0422** - Insufficient extended memory

At least one SCCP card does not have enough memory for the INP and/or AINPQ application. Loading of the SCCP card is automatically inhibited.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
** 0012.0422 ** CARD 1108 SCCP Insufficient extended memory
```

- **UAM 0423** - Card reload attempted

Card loading is no longer inhibited. The once inhibited card is now attempting to load.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
0012.0423 CARD 1108 SCCP Card reload attempted
```

- **UAM 0441 - Incorrect MBD - CPU**

A DSM card does not have the required hardware configuration for the INP and/or AINPQ application.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
** 0012.0441 ** CARD 1108 VSCCP Incorrect MBD - CPU
```

- **UAM 0442 - RTDB database capacity is 95% full**

This critical alarm is generated when a DSM card detects that its applique memory is 95% full. Loading of the DSM card is automatically inhibited when it reaches 100% of capacity. The actual memory usage can be displayed by entering the `rept-stat-mps:loc=xxxx` command.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
*C 0012.0442 *C CARD 1108 VSCCP RTDB database capacity is 95% full
```

- **UAM 0443 - RTDB database is corrupted**

A RTDB database is corrupt. The calculated checksum did not match the checksum value stored for one or more records.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
** 0012.0443 ** CARD 1108 VSCCP RTDB Database is corrupted
```

- **UAM 0444 - RTDB database is inconsistent**

One or more DSM card's real time database is not identical to the current real time database on the active EPAP fixed disks.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
* 0012.0444 * CARD 1108 VSCCP RTDB database is inconsistent
```

- **UAM 0445 - RTDB database has been corrected**

This message indicates that a problem with the RTDB has been corrected.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
0012.0445 CARD 1108 VSCCP RTDB database has been corrected
```

- **UAM 0446 - RTDB Database capacity is 80% full**

This message is displayed when a DSM card detects that its daughterboard memory is at least 80% full.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
** 0012.0446 ** CARD 1108 VSCCP RTDB Database capacity is 80% full
```

- **UAM 0447 - RTDB database capacity alarm cleared**

## Maintenance and Measurements

This message indicates that a problem with the RTDB memory has been corrected.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
0012.0447 CARD 1108 VSCCP RTDB database capacity alarm cleared
```

- **UAM 0448** - RTDB database is incoherent

This message indicates that the RTDB database download is in-process or that the update failed.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
* 0012.0448 * CARD 1108 VSCCP RTDB database is incoherent
```

- **UAM 0449** - RTDB resynchronization in progress

This message indicates that the MPS database resynchronization is in-process.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
** 0012.0449 ** CARD 1108 VSCCP RTDB resynchronization in progress
```

- **UAM 0451** - RTDB reload is required

The RTDB database on the DSM card needs to be reloaded because the resynchronization log does not contain all of the required updates.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
** 0012.0451 ** CARD 1108 VSCCP RTDB reload is required
```

## GSM Subsystem Alarms

The following alarms are output on the EAGLE 5 ISS for the GSM subsystem. The GSM Subsystem alarms are output to the GTT Output Group.

- **UAM 0328** - SCCP is available

The SCCP subsystem has returned to service.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
0056.0328 SCCP SYSTEM SCCP is available
```

- **UAM 0329** - SCCP capacity normal, card(s) abnormal

1 SCCP card has GSM status of Active and there are 1 or more cards with an GSM status other than Active.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
0056.0329 SCCP SYSTEM SCCP capacity normal, card(s) abnormal
```

- **UAM 0330** - System SCCP TPS Threshold exceeded

Indicates the EAGLE 5 ISS has exceeded its TPS (Transactions Per Second) message transport rate threshold.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
** 0056.0330 ** SCCP SYSTEM System SCCP TPS Threshold exceeded
```

- **UAM 0331 - SCCP is not available**

The SCCP subsystem is not available to any LIM(s). All DSM-SCCP cards have failed.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
*C 0056.0331 *C SCCP SYSTEM SCCP is not available
```

- **UAM 0335 - SCCP is removed**

All SCCP cards have been deleted from the database; SCCP services are not available to the system.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
0056.0335 SCCP SYSTEM SCCP is removed
```

- **UAM 0336 - LIM(s) have been denied service**

Some LIM(s) are using the SCCP subsystem, but others have been denied service.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
** 0056.0336 ** SCCP SYSTEM LIM(s) have been denied SCCP service
```

## INP/AINPQ Subsystem Alarms

The following alarms are output on the EAGLE 5 ISS for the INP/AINPQ subsystem. The INP/AINPQ Subsystem alarms are output to the Application Subsystem Output Group.

- **UAM 0394 - Local Subsystem is available**

All SCCP cards are IS-NR and have an INP/AINPQ status of Active.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
0056.0394 INP SYSTEM Local Subsystem is available
```

- **UAM 0395 - Local Subsystem is not available**

Indicates no SCCP cards have an INP/AINPQ status of active. All are OOS or loading.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
*C 0056.0395 *C INP SYSTEM Local Subsystem is not available
```

## Maintenance and Measurements

- **UAM 0396** - Local Subsystem is disabled

The INP/AINPQ subsystem has been manually disabled using the *inh-map-ss* command.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
*C 0056.0396 *C INP SYSTEM Local Subsystem is disabled
```

- **UAM 0397** - Local Subsystem is removed

There are no VSCCP cards configured with this INP/AINPQ subsystem.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
0056.0397 INP SYSTEM Local Subsystem is removed
```

- **UAM 0398** - Local Subsystem normal, card(s) abnormal

1 SCCP card has INP/AINPQ status of Active and there are 1 or more cards with an INP/AINPQ status other than Active.

Example:

```
station1234 06-04-30 16:28:08 EST EAGLE 36.0.0
* 0056.0398 * INP SYSTEM Local Subsystem normal, card(s) abnormal
```

## INP/AINPQ Subsystem Related UIMs

The UIM (Unsolicited Information Message) alarms in Table 5-2 support the INP/AINPQ subsystem. The *EAGLE 5 ISS Maintenance Manual* contains a complete description of all UIM text and formats. The INP/AINPQ Subsystem related UIMs are output to the Application Subsystem Output Group.

**Table 5-2.** INP/AINPQ Subsystem UIM Alarms

UIM	Text	Description	Action
1242	Conv to intl num - Dflt CC not found	Conversion to international number failed because default CC was not found	Define the default CC with <code>chg-stpopts :defcc=xxx</code>
1243	Conv to intl num - Dflt NC not found	Conversion to international number failed because default NC was not found	Define the default NDC with <code>chg-stpopts :defndc=xxxxxx</code>
1246	Invalid length of conditioned digits	Invalid length of conditioned digits (length of conditioned international number is less than 5 or greater than 15)	Use an international number with length in the acceptable range
1295	Translation PC is EAGLE 5 ISSs	PC translation is invalid because it is one of the point codes of the EAGLE 5 ISS	Change the point code
1296	Translation PC type is ANSI	PC translation is invalid because it is an ANSI point code	Change the point code
1297	Invalid length of prefix/suffix digits	Attempted digit action of prefixing or suffixing the entity ID is invalid because the combined length of entity ID and GT digits is greater than 21 digits.	Change the attempted digit action or decrease the length of the entity ID and/or GT digits

**NOTE:** The EPAP does not have any UIM requirements.

## INP/AINPQ Measurements

Refer to the *EAGLE 5 ISS Maintenance Manual* for detailed measurement usage information.

### OAM Based Measurements

INP/AINPQ measurements are available via the FTA (File Transfer Area) feature and not directly via EAGLE 5 ISS terminals. The File Transfer Area feature supports the transfer of file data between an EAGLE 5 ISS and a remote computer. It provides the capability to download files from the EAGLE 5 ISS via a data communications link. The data communications link is accessed through a dial-up modem using one of the RS-232 I/O ports of the EAGLE 5 ISS. The link is illustrated in Figure 2-5 “Dial-up PPP Network” on page 2-16.

See the *Commands Manual* for details about using FTA commands, which are:

- Activate File Transfer: `act-file-trns`
- Copy to or from Transfer Area: `copy-fta`
- Delete Entry from File Transfer Area: `dlt-fta`
- Display File Transfer Area: `disp-fta-dir`

### Measurements Platform

The Measurements Platform (MP) is required for an EAGLE 5 ISS with more than 700 links. It provides a dedicated processor for collecting and reporting STP, LNP, INP, AINPQ, G-Flex, A-Port, and G-Port measurements data. The interface to the customer's network supports the FTP transfer of Measurements reports to an FTP server. Following collection, scheduled reports are automatically generated and transferred to the customer's FTP server via the FTP interface.

**NOTE: Existing FTP file server reports are overwritten by subsequent requests that produce the identical file name.**

Reports can be scheduled or printed on-demand. Scheduled and on-demand reports are accessible by the following administrative commands:

- *chg-measopts* - Used to enable or disable the automatic generation and FTP transfer of scheduled measurement reports to the FTP server.
- *rept-stat-meas* - Reports the status of the measurements subsystem including card location and state, Alarm level, and Subsystem State.
- *rept-ftp-meas* - Manually initiates generation and FTP transfer of a measurements report from the MCPM to the FTP server.
- *rtrv-measopts* - Generates a user interface display showing the enabled/disabled status of all FTP scheduled reports.

The following Per System measurement peg counts of INP/AINPQ MSUs (Message Signalling Units) are supported for the INP and AINPQ features, as shown in Table 5-3. The peg for “IDP received” is the total count of the number of the NPREQ and IDP queries received if both the NPREQ and either the INP feature or the AINPQ feature or both are turned on.

**Table 5-3.** New Pegs for Per System INP/AINPQ Measurements

Event Name	Description	Type	Unit
INPQRCV	Number of total queries received by INPQS	System	Peg count
INPQDSC	Number of invalid queries that are discarded as no reply can be generated	System	Peg count
INPQTCPE	Number of error replies with TCAP error code	System	Peg count
INPSREP	Number of successful replies to INP/AINPQ non-queried queries. These replies will be: <ul style="list-style-type: none"> <li>• Either INP Connect or INP Continue for the INP feature</li> <li>• Either Return Result with Digits or Return Result without Digits for the AINPQ feature.</li> </ul>	System	Peg count

The following equation applies:

$$\text{INPQRCV} = \text{INPQDSC} + \text{INPQTCPE} + \text{INPSREP}$$

The following Per SSP measurement peg counts of INP/AINPQ MSUs are supported for the INP and AINPQ features. See Table 5-4.

**Table 5-4.** Pegs for Per SSP INP/AINPQ Measurements

Event Name	Description	Type	Unit
INPQSCONN	Number of non-errored QS messages with QS	Point Code	Peg count
INPQSCONT	Number of non-errored QS messages with QS Continue or Return Result without Digits responses	Point Code	Peg count
INPMRTR	Number of messages sent to MR service that receive MR translation	Point Code	Peg count
INPMRGTT	Number of messages sent to MR service that fall through to GTT	Point Code	Peg count

The following equation applies:

$$\text{INPSREP} = \text{INPQSCONN} + \text{INPQSCONT}$$

## Maintenance and Measurements

The following measurement events are included on the STP Daily Maintenance (MTCDD) and the STP Day-to-Hour (MTCDDTH) measurement reports and include peg counts for INP/AINPQ MSUs. These reports are similar to those used for GTT. The existing GTT/SCCP measurements are used for both GTT and INP/AINPQ and appear in the same reports.

- **MSSCCPFL** MSUs discarded due to SCCP routing failure  
Also includes INP/AINPQ MSUs that got a match from either the INP/AINPQ or GTT database, but cannot be routed because of PC (Point Code) or SS (SubSystem) congestion, PC or SS unavailable, SS unequipped, or an unqualified error.
- **GTTUN0NS** GTT unable to perform; no such type  
Also includes INP/ANIPQ Message Relay MSUs that did fall through to GTT but did not match on GTT selectors
- **GTTUN1NT** GTT unable to perform: no translation on this address  
Also includes INP/ANIPQ Message Relay MSUs that fell through to GTT, obtained a GTT selector match but still did not match on the GTA.
- **GTTPERFD** Number of GTT performed  
Also includes INP/AINPQ MSUs that got a match in either the INP/AINPQ or GTT database.

This implementation does not discriminate between the MSSCCPFL, GTTUN0NS, GTTUN1NT, or GTTPERFD pegs for INP/AINPQ or GTT applications. For example, a search failure could result from a problem in either the INP/AINPQ or GTT database.

## Measurement Reports

Measurements are available with these report commands. Refer to the *Commands Manual* for detailed usage information.

- OAM daily: `rept-meas:type=mtcd:enttype=np`
- OAM hourly: `rept-meas:type=mtch:enttype=np`
- MP daily: `rept-ftp-meas:type=mtcd:enttype=np`
- MP hourly: `rept-ftp-meas:type=mtch:enttype=np`



# Prepaid IDP Query Relay Feature

Overview .....	6-1
Feature Description .....	6-2
Call Flows.....	6-2
Service Selection.....	6-7
CDPN Number Format Determination .....	6-8
CDPN Number Conditioning .....	6-10
MNP Database Search .....	6-12
Encoding of Outgoing CDPN .....	6-13
IDPR Commands .....	6-14
IDPR Measurements.....	6-16
Prepaid IDP Query Relay Provisioning and Activation .....	6-16

## Overview

The Prepaid IDP Query Relay feature (IDP Relay) provides a mechanism to insure the correct charging for calls from prepaid subscribers in a portability environment.

Mobile Switching Centers (MSCs) in the network must be configured to send all IDP prepaid query messages through the EAGLE 5 ISS MPS. The EAGLE 5 ISS MPS platform intercepts the IDP query based on a set of configurable criteria, then performs a number portability lookup on the number given in the IDP CalledPartyNumber (CDPN) parameter (or CalledPartyBCDNumber in CAMEL IDPs, based on the call scenario). If a respective entry is found in the INP database, the CDPN is modified with the portability information (routing number or HLR address) and then forwarded to the prepaid SCP (PPSCP) for processing.

When the SCP receives the IDP query, all of the information it needed to correctly charge for and process the call is already present, without the need to launch a separate number portability database query.

### Feature Description

The EAGLE 5 ISS MPS platform intercepts the IDP query based on a set of configurable criteria, then performs a number portability lookup on the called number, insert the portability information (Routing Number or HLR Address), and forward the IDP query to a prepaid SCP for processing. If a respective entry is found in the INP database, the CDPN is modified with the portability information (routing number or HLR address) and then forwarded to the prepaid SCP (PPSCP) for processing.

The concept of IDP Relay is that instead of the MSC routing the prepaid IDP query directly to the prepaid SCP, and forcing the SCP to perform its own number portability database query, the IDP query is instead intercepted by the EAGLE 5 ISS. The EAGLE 5 ISS (using the MPS) performs a portability check on the called number, inserts the portability information (Routing Number or HLR Address), and forwards the IDP query to a prepaid SCP for processing. When the SCP receives the IDP query, all of the information needed to correctly charge for and process the call is already present, without the need to launch a separate number portability database query.

### Call Flows


#### Mobile Originated Prepaid Call to a Ported Out Subscriber

This scenario encompasses the following subscriber types:

- **Own Subscriber Ported Out** - Refers to an Own Subscriber who has ported to a Foreign Network.
- **Foreign Subscriber Ported to Foreign Network** - Refers to a Foreign Subscriber who has ported to a different Foreign Network.
- **Foreign Subscriber** (optional, dependent on how the RTDB is provisioned) - Refers to a subscriber whose number belongs to the number range of a Foreign Network, and who has not ported to another Foreign Network.
- **Foreign Subscriber Not Known to be Ported** (optional, dependent on how the RTDB is provisioned) - Refers to a Foreign Subscriber whose portability status is unknown by the querying network.

When a prepaid subscriber attempts to originate a call, the MSC/VLR must first query a prepaid SCP before attempting to complete the call in order to determine if the subscriber has enough credit to complete the call.

Figure 6-1. MO Prepaid Call to Ported Out Subscriber

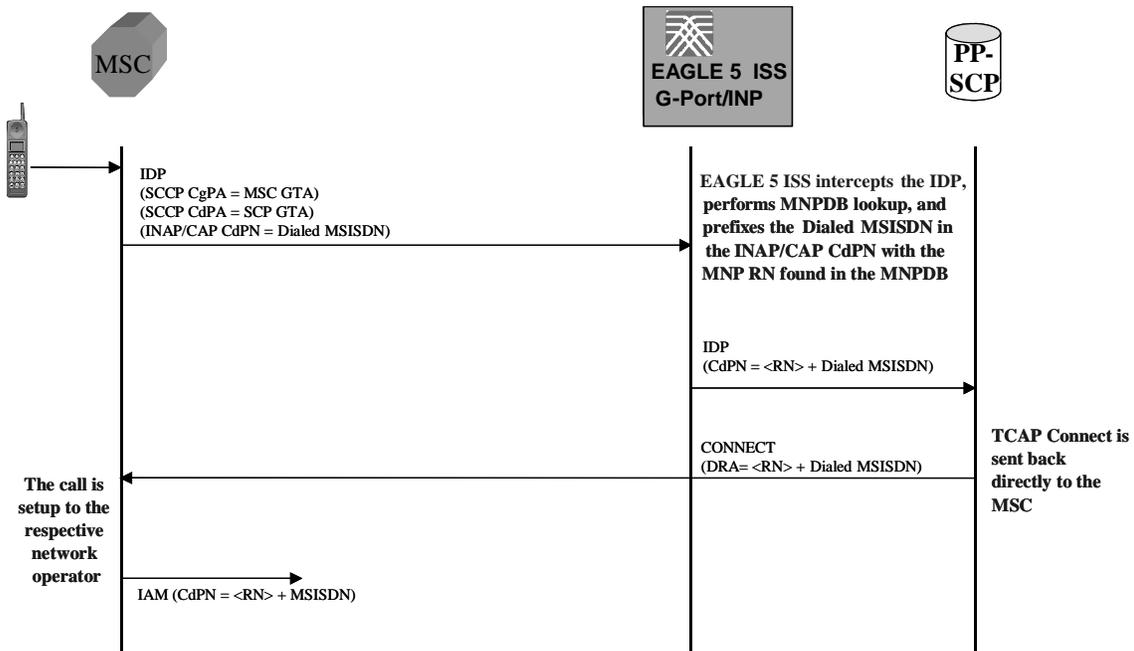

When a prepaid subscriber originates a call, the MSC/MSC/VLR serving that subscriber formulates an INAP or CAP IDP message and routes it to the Prepaid SCP. This message is routed via GTT (SCCP CdPA = PPSCP GTA), with the EAGLE 5 ISS serving as either the Intermediate or Final GTT service provider. In either case, the EAGLE 5 ISS is either an Intermediate or Final GTT service provider for the message (message arriving at the EAGLE 5 ISS must have MTP DPC = Eagle PC, SCCP CdPA RI = route-on-GT, and SCCP CdPA GTA = PPSCP) in order for the IDP Relay service to be triggered.

Upon receipt of the IDP, the EAGLE 5 ISS first examines the SCCP CdPA TT, SSN, NP, NAI, and GTI (Service Selectors) to determine which of the EAGLE 5 ISS's SCCP services is required (IDP Relay, INP, AINPQ, G-Port, A-Port, G-Flex, GTT, etc.). If the message parameters match the provisioned Service Selector combination for IDP Relay service in general, the EAGLE 5 ISS then determines whether this specific IDP requires processing by the IDP Relay service based on examination of the SCCP CdPA GTA digits (which should be the GTA of a PPSCP), the TCAP Operation Code, and the combination of Service Key and EventTypeBCSM in the INAP/CAP layer. If the SCCP CdPA GTA matches one of the provisioned PPSCP addresses, the Operation Code signifies IDP, and the Service Key and EventTypeBCSM matches one of the provisioned service values for the IDP Relay service, then the EAGLE 5 ISS enters the IDP Relay logic. Otherwise, the EAGLE 5 ISS continues with normal SCCP processing.

If the intercepted IDP is selected for IDP Relay service, the EAGLE 5 ISS enters the IDP Relay processing routing. The EAGLE 5 ISS extracts the B-party number (the number which was dialed by the prepaid subscriber) from the INAP/CAP

CalledPartyNumber parameter, or from the CAP CalledPartyBCDNumber parameter (CDPN), and performs a lookup in the EAGLE 5 ISS's G-Port/INP MNP database (after some number filtering and conditioning).

In this scenario, the EAGLE 5 ISS finds a match on the B-party DN in the RTDB with an association to a Routing Number (RN).

**NOTE: Typically, an DN entered in the database with an association to an RN indicates that the number is either (a) an Own Number ported to another network, or (b) a Foreign Number which has been ported to another foreign network. In some cases (depending upon how the customer chooses to provision the database), this may also indicate a Foreign Number which is not known to be ported.**

After finding a match on DN with an associated RN in the G-Port RTDB, the EAGLE 5 ISS modifies the INAP/CAP CDPN parameter by prefixing the RN information to the DN. The CDPN NAI parameter will be copied from the incoming value, or changed to 'Unknown', based on the provisioned value in the EAGLE 5 ISS. The IDP Relay service may be configured to either send the same NAI as was received in the incoming CDPN, or to send the value 'unknown' in all cases.

**NOTE: The term CDPN NAI is used in this document to represent the value in the INAP/CAP CDPN parameter. In INAP, this parameter is known as "NADI", while in CAP, it is known as "Type of Number". CDPN NAI is used here to represent both for simplicity.**

After performing the required modifications, the EAGLE 5 ISS then routes the modified IDP via GT translation to the PPSCP indicated by the original GTA in the SCCP CdPA, which was not altered as a result of the IDP Relay operation. The PPSCP receives the modified IDP, containing the portability information needed to correctly charge for the call. The SCP then returns the appropriate response to the MSC/VLR, either allowing or denying the call.

In order for the IDP Relay feature to provide accurate portability information for all ported numbers, it is required that all ported numbers be entered into the MNP database, including Own numbers ported out as well as Foreign numbers ported to foreign networks. If a foreign number ported to a foreign network is not entered in the database with a routing number (either in the individual or range entry tables), the IDP Relay will not find a match, and will not be able to prefix the routing number information to the CDPN in the IDP with the routing number of the current subscription network. Thus, the EAGLE 5 ISS sends the original IDP unmodified to the SCP with CDPN = dialed DN only. However, even in this case it is possible for the SCP to differentiate calls within the own network from calls to foreign networks very easily.

### Mobile Originated Prepaid Call to Imported or Own Non-Ported Subscriber

This scenario encompasses the following subscriber types:

- **Own Subscriber** - Refers to a subscriber whose number belongs to the number range of the Own Network and who has not ported to another network.
- **Foreign Subscriber Ported In** - Refers to a Foreign Subscriber who has ported into the Own Network.

When a prepaid subscriber attempts to originate a call, the MSC/VLR must first query a prepaid SCP before attempting to complete the call in order to determine if the subscriber has enough credit to complete the call.


When a prepaid subscriber originates a call, the MSC/MSC/VLR serving that subscriber formulates an INAP or CAP IDP message and routes it to the Prepaid SCP. This message is routed via GTT (SCCP CdPA = PPSCP GTA), with the EAGLE 5 ISS serving as either the Intermediate or Final GTT service provider. In either case, the EAGLE 5 ISS is either an Intermediate or Final GTT service provider for the message (message arriving at the EAGLE 5 ISS must have MTP DPC = Eagle PC, SCCP CdPA RI = route-on-GT, and SCCP CdPA GTA = PPSCP) in order for the IDP Relay service to be triggered.

Upon receipt of the IDP, the EAGLE 5 ISS first examines the SCCP CdPA TT, SSN, NP, NAI, and GTI (Service Selectors) to determine which of the EAGLE 5 ISS's SCCP services is required (IDP Relay, INP, AINPQ, G-Port, A-Port, G-Flex, GTT, etc.). If the message parameters match the provisioned Service Selector combination for IDP Relay service in general, the EAGLE 5 ISS then determines whether this specific IDP requires processing by the IDP Relay service based examination of the SCCP CdPA GTA digits (which should be the GTA of a PPSCP), the TCAP Operation Code, and the combination of Service Key and EventTypeBCSM in the INAP/CAP layer. If the SCCP CdPA GTA matches one of the provisioned PPSCP addresses, the Operation Code signifies IDP, and the Service Key and EventTypeBCSM matches one of the provisioned service values for the IDP Relay service, then the EAGLE 5 ISS enters the IDP Relay logic. Otherwise, the EAGLE 5 ISS continues with normal SCCP processing.

If the intercepted IDP is selected for IDP Relay service, the EAGLE 5 ISS enters the IDP Relay processing routing. The EAGLE 5 ISS extracts the B-party number (the number which was dialed by the prepaid subscriber) from the INAP/CAP CalledPartyNumber parameter, or from the CAP CalledPartyBCDNumber parameter (CDPN), and performs a lookup in the EAGLE 5 ISS's G-Port/INP MNP database (after some number filtering and conditioning).

In this scenario, the EAGLE 5 ISS finds a match on the DN in the RTDB with an association to an SP entity ID (HLR GTA).

Figure 6-2. MO Prepaid Call to an Imported or Own-Non-Ported Subscriber

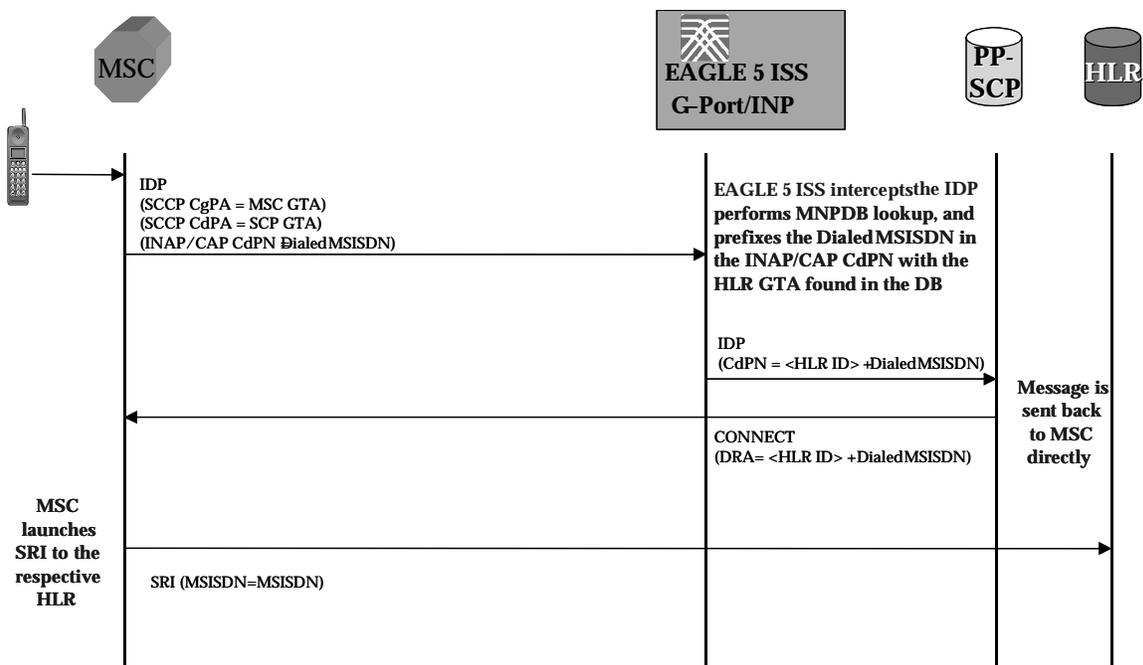

In this case, the PPSCP always requires an SP ID to be prefixed to the DN in the CDPN - for both Foreign Numbers Ported In as well as Own Numbers never ported. Based on this, the IDP Relay requires that all such numbers be entered in the MNP database with an association to an SP ID, either as individual numbers (which is likely the case for imported numbers), or in a number range (which is likely the case of own numbers not ported). This distinction is made because in a standard MNP node, it is often standard practice not to enter Own Subscribers never ported because for SP queries, the standard GTT translation normally suffices for these subscribers, and it is not required to enter them into the RTDB. If these numbers are not entered, IDP Relay will not find a match, and would simply transfer the IDP without modification to the PPSCP (containing DN only in CDPN).

This may not be an issue if the PPSCP correctly interprets when the PPSCP receives an IDP without any RN or SP ID, it assumes the DN is an Own Subscriber, and acts accordingly. There is also a value to enter all own subscribers with the respective HLR-ID to streamline MNP processing in networks with a high prepaid subscriber base.

### Mobile Originated Prepaid Call to Foreign (Non-Ported) Subscriber

In this scenario, an IDP is received for a number which is a foreign (non-own-network) number and which has not been ported. There are two options in this scenario, both configurable via provisioning. In one case, a number range for the foreign network is entered with a generic routing number for the network. In this case, the IDP Relay reacts in the same way as with a ported-out number, prefixing the CDPN with the RN taken from the number range entry. Although the number is technically not ported, the use of a range with an RN would still point to the correct network.

Alternatively, if the number is not provisioned in the RTDB at all, or is entered without an associated routing number/HLR ID, the IDP is not modified and the message is simply be relayed to the SCP. In this scenario, the SCP returns the IDP response to the MSC without any prefix.

Note that this method could also be used for Own Subscribers never ported - i.e. no entry in the RTDB, which would cause IDP Relay to send the unmodified IDP to the PPSCP.

### Service Selection

When an IDP is sent by an MSC, it is sent to the PPSCP via the EAGLE 5 ISS for GTT processing. As such, the message will contain MTP DPC = Eagle's PC and SCCP CdPA = PPSCP GTA with RI = GT. Because the MTP destination of the message is the EAGLE 5 ISS, the message is delivered to the EAGLE 5 ISS's SCCP subsystem for processing.

The EAGLE 5 ISS's SCCP subsystem first examines the SCCP CdPA parameters to determine which service is being requested (the EAGLE 5 ISS contains a Service Selection table to inform the system of how to treat incoming messages according to basic SCCP parameters). The SCCP CdPA TT, NP, NAI, GTI, and SSN parameters are examined first for this purpose. This combination of parameters may or may not be enough to determine that the message should receive IDP Relay service, and is based on what other services are active on the EAGLE 5 ISS. (For example, if the Eagle is expected to receive other IDP messages that do not require IDP Relay, the Service Selectors would not provide a definitive decision point, as the TT, NP, NAI, GTI, and SSN would likely be identical for all IDPs.) Therefore, additional service selection criteria are required.

After examining the basic Service Selectors and determining that the combination is consistent with service selectors for the IDP Relay service, the EAGLE 5 ISS then examines the SCCP CdPA GTA digits against a provisioned list of Prepaid SCP GTAs. This list should contain all SCPs which could be the recipient of an IDP for prepaid query. If the SCCP CdPA GTA matches one of the provisioned PPSCP GTAs, the EAGLE 5 ISS then proceeds with service selection evaluation. If no match is found, the IDP is processed by standard GTT service in the EAGLE 5 ISS.

If the SCCP CdPA GTA matches one of the provisioned PPSCP GTAs, the EAGLE 5 ISS continues service selection to determine if IDP Relay is required. The TCAP Operation Code is next examined. The OpCode should be that for IDP. If it is not, the IDP is processed by standard GTT service in the EAGLE 5 ISS.

The EAGLE 5 ISS next compares the combination of INAP/CAP Service Key and EventTypeBCSM from the message with a provisioned list of Service Keys + Event Types. If the Service Key + EventTypeBCSM match one of the provisioned combinations pointing to IDP Relay service, then the message is sent for IDP Relay service. IDPs not matching these criteria fall through to standard GTT service and are routed transparently (unless the message matches the service selectors for another SCCP service hosted on the EAGLE 5 ISS, in which case the message is sent for that service).

### CDPN Number Format Determination

After determining that a particular IDP requires the IDP Relay service, the EAGLE 5 ISS next determines the format of the incoming number, and the context surrounding the call. These items factor into both the conditioning of the number for the RTDB search, as well as the manner in which the message is treated as a result. The following details about the number must be known:

- Is the call terminating to a subscriber in the home country? (Calls terminating to numbers outside the home country are not subject to IDP Relay since number portability does not cross International boundaries).
- Is the calling subscriber roaming or dialing from inside the home country? (Determines if numbers dialed as national numbers are treated as in-country or out-of-country terminated).
- Was the number dialed with Escape Codes? (These must be deleted for DB lookup, but may be re-inserted for transmission).

The INAP/CAP CDPN parameter includes a CDPN NAI parameter which indicates the nature of address for the dialed digits (International, National, Subscriber, or Unknown). This parameter alone cannot always be relied upon to determine the format of the CDPN. For example, it is possible for the CDPN to contain a National number, but the CDPN NAI may be marked "Unknown".

Other conditions also factor into how a received number should be treated. For example, a National number dialed while a subscriber is roaming must be treated differently than a National number dialed while a subscriber is in his/her home country/network. The condition of whether the calling subscriber is roaming or not cannot be determined from the CDPN NAI in the CDPN.

Additional checks are required in order to determine the true nature of the CDPN. The following sections describe the additional checks applied to the received IDP in order to determine how the message is treated.

### Escape Codes

Escape Codes are also considered when determining the CDPN number format.

Subscribers are normally required to enter International Escape Code (IEC) before dialing the digits an International number. For example, in some countries, the digits *00* must be dialed before dialing an International number.

Subscribers are also normally required to enter a National Escape Code (NEC) to before dialing long distance National numbers. For example, many countries require a single *0* to be dialed before dialing a National number.

Escape codes must be removed for IDP Relay to perform the database lookup, as the numbers in the RTDB are always provisioned in International format. When an Escape Code is used, the CDPN NAI will be *unknown*. Therefore, whether *IEC* or *NEC* is found will indicate whether the number is International or National.

The EAGLE 5 ISS provides a table to provision both an *IEC* and a *NEC*. If a message is received with CDPN CDPN NAI = unknown, IDP Relay first checks the leading digits of the number for a match with *IEC* or *NEC*, and treats the number accordingly. If CDPN NAI = unknown and no match is found on the *IEC* or *NEC*, the number is treated as National with no preceding *NEC*.

### Calling Subscriber Roaming

Roaming is another factor that must be considered when determining the structure of the incoming IDP, and how it should be treated is whether or not the calling subscriber is roaming when the call is placed.

When a subscriber is roaming, all incoming IDPs generated from calls made by that subscriber are CAMEL Application Part (CAP) rather than INAP. When a roaming subscriber dials a National Number (number without a Country Code), it is treated differently that when a non-roaming subscriber dials a National Number. This is because when a subscriber dials a National number while roaming Internationally, it is assumed that the subscriber is attempting to dial a number in the country where they are currently roaming, and not in their home country (if the subscriber wishes to dial a number in their home country, it must be dialed as an International number since they are roaming).

Since MNP checks are not conducted across International boundaries, calls from a roaming subscriber to a National number should be subject to IDP Relay service. Calls from the same subscriber to a National number when the subscriber is not roaming are subjected to IDP Relay service because these numbers are assumed to be terminating in the subscriber's home country, where portability applies. The National number digits could be identical in these two cases, although the actual destination is different.

For these reasons, it may be required that the IDP Relay function be able to distinguish between an IDP received for a call generated by a roaming subscriber versus one generated by a non-roaming subscriber. The IDP Relay service offers a configurable option to select whether IDPs generated by roaming subscribers should be subjected to IDP Relay processing, or be routed via standard GTT.

If this option (CGPA check) is activated, the calling subscriber's roaming status is determined by comparing the Country Code in the SCCP CGPA parameter of the IDP with the Default Country Code provisioned in the EAGLE 5 ISS. (There is only one Default CC provisioned in the EAGLE 5 ISS, and it corresponds to the *home* network. If a subscriber is roaming, the CC of the visited MSC will not match the Default CC provisioned in the EAGLE 5 ISS). If National roaming is allowed, the respective scenarios are treated as if the subscriber is not roaming. A roaming scenario is not detected by the CGPA check and IDP Relay processing is performed. This option is ON by default. If the operator wants the IDP Relay feature to treat IDPs generated from roaming subscribers, this option must be turned OFF.

### **Call Placed to Country Other than Home Country**

The IDP Relay check does not apply if a subscriber dials a number in a country other than subscriber's home country. The INAP/CAP CDPN Country Code is checked against the Default CC provisioned in the EAGLE 5 ISS. If a match is not found, it means the subscriber has dialed a number outside his home country and IDP Relay is not required. The message simply falls through to GTT (or other SCCP service).

### **CDPN Number Conditioning**

Once the format of the CDPN number has been determined as described in "CDPN Number Format Determination" on page 6-8, conditioning (if necessary) is performed before an RTDB lookup. The INP MNP database stores numbers in full International format only. Numbers not received in International format must first be converted (conditioned) before performing an RTDB lookup. For a summary refer to Table 6-1.

### **CDPN Received in International Format**

There are two number format determination cases which result in a number being declared in International format.

- CDPN Received in Correct International Format (CDPN NAI = "International")  
In the case that the INAP/CAP Called Party Number (or Called Party BCD Number) is already in International format (as determined by CDPN NAI parameter set to "International") with no extra prefixes or suffixes, including no Escape Codes. No conditioning is required by the IDP Relay application prior to RTDB lookup.

## Prepaid IDP Query Relay Feature

- CDPN Received with IEC Prefixed to International Digits (CDPN NAI = “Unknown”)  
If the CDPN NAI = Unknown, the IDP Relay first searches for an International Escape Code (IEC). If an IEC is found, the received CDPN is conditioned prior to RTDB lookup by removing the IEC, leaving only the International digits (CC+DN).

### CDPN Received in National Format

There are three number format determination cases which result in a number being declared in National format.

- CDPN Received in Correct National Format (CDPN NAI = National)  
The INAP/CAP Called Party Number (or Called Party BCD Number) is received in correct National format (as determined by CDPN NAI parameter set to “National”) with no extra prefixes or suffixes, including no Escape Codes. If the calling subscriber is not roaming, then IDP Relay conditions the CDPN by prefixing the DefCC to the DN prior to conducting the RTDB lookup.
- CDPN Received with NEC Prefixed to National Digits (CDPN NAI = Unknown)  
If the CDPN NAI = Unknown, IDP Relay first searches for an International Escape Code (IEC), and if no match, then searches for a National Escape Code (NEC). Since the NEC is found (in this case), the received CDPN must be conditioned prior to RTDB lookup by first removing the NEC, then prefixing the DefCC to the remaining National digits (DN), resulting in an International number for lookup.
- CDPN Received without Prefix, but CDPN NAI = “Unknown”  
In this case, the CDPN is in a National format without a prefixed Escape Code, but the CDPN NAI is still marked “Unknown” rather than “National”. After searching first for an IEC, then for a NEC prefixed to the CDPN and finding neither, IDP Relay assumes that the number is in National format. If the subscriber is not roaming, then IDP Relay conditions the number prior to RTDB lookup by adding the DefCC to the digits received in the CDPN, which are assumed to be DN without a prefix.

**Table 6-1. IDP Relay Number Conditioning Table**

Incoming Address Format			Number Conditioning	Outgoing Address Format	
TCAP DN NAI	Perform SCCP CGPA DefCC Check?	TCAP DN Format		NAI	Format
International	No	CC DN	None. Do RTDB lookup.	If PFX3=UNKN NAI=unknown Else NAI=International	PFX1 CC RN DN
National	if PFX4=ON	DN	Add DEFCC. Do RTDB lookup.	If PFX3=UNKN NAI=unknown Else nai=National	PFX2 RN DN
Unknown	No	IEC CC DN	CSL Delete prefix found, (P1=International), remove it, Do RTDB Lookup	NAI=unknown	IEC CC RN DN
Unknown	if PFX4=ON	NEC DN	CSL Delete prefix found, (P1=National), remove it, Add DEFCC, Do RTDB Lookup	NAI=unknown	NEC RN DN
Unknown	if PFX4=ON	DN	No delete prefix found. Add DEFCC, Do RTDB Lookup	NAI=unknown	RN DN
Legend:			UNKN	Unknown	
CC	Country Code		NEC	National Escape Code	
PFX	Prefix Number		DEFCC	Default Country Code	
DN	Directory Number		NAI	Nature of Address Indicator	
IEC	International Escape Code		SCCP	Signaling Connection Control Part	
RTDB	Real Time Database		TCAP	Transaction Capabilities	
CSL	Common Screening List			Application Part	
CGPA	Calling Party Address				

### MNP Database Search

After service selection, number format determination, and number conditioning, the IDP Relay service searches the INP MNP database with the digits retrieved from the INAP/CAP CDPN parameter of the IDP message. This search results in one of four outcomes

#### Match on Digits with RN (Routing Number)

This condition indicates that the number belongs to a Foreign Network, and could be an Own Subscriber ported out, or a Foreign Subscriber. The IDP Relay then prefixes the RN to the CDPN digits and relays to the PPSCP.

## Prepaid IDP Query Relay Feature

### **Match on Digits with SP (SP Address)**

This condition indicates that the number belongs to the Own Network, and could be an Own Subscriber, or a Foreign Subscriber ported in. The IDP Relay then prefixes the SP address to the CDPN digits and relays to the PPSCP.

### **Match on digits, but no associated RN or SP**

This condition indicates a number was entered in the RTDB, but the portability status is unknown. Data might be entered in this format because it is an All Call Query solution based on SRF, but regulation does not allow prefixing of non-ported numbers. If IDP Relay finds such a match, the EAGLE 5 ISS terminates the IDP Relay function and simply routes the message via standard GTT to the PPSCP. The EAGLE 5 ISS will not modify the INAP/CAP portion of the message, and will only modify the MTP and SCCP CdPA modifications if required by standard GTT.

### **No Match on Digits**

This condition indicates the number is not in the RTDB. Generally, this indicates that the number has never been ported (in or out), or is an unknown number. In any case, if IDP Relay encounters this scenario, the EAGLE 5 ISS will terminate the IDP Relay function and simply route the message via standard GTT to the PPSCP. The EAGLE 5 ISS will not modify the INAP/CAP portion of the message, and will only modify the MTP and SCCP CdPA modifications if required by standard GTT.

## **Encoding of Outgoing CDPN**

If a match is found in the RTDB on the CDPN digits with either an RN or an SP/SP, the IDP Relay function then modifies the CDPN by adding the RN or SP/SP address to the CDPN. The exact placement of the RN/SP and the exact format of the CDPN in the outgoing message is dependent upon the format and context of the incoming message.

### **Setting of Outgoing CDPN NAI Parameter**

The user has two basic options for setting the CDPN NAI parameter in the CDPN of the outgoing message. The Eagle will provide an option for setting CDPN NAI with values of either “unknown” or “incoming”. “Unknown” is the default value for this option. When “unknown” is selected, or if no option has been selected, the CDPN NAI in the outgoing CDPN will always be set to “Unknown” regardless of the CDPN NAI received in the incoming message, and regardless of the format of the outgoing digits. When “incoming” is selected, the CDPN NAI in the outgoing CDPN will be set to the same value as the CDPN NAI received in the incoming message, regardless of the format of the outgoing digits. (This means that if the incoming CDPN NAI = Unknown, the outgoing CDPN NAI will also be set to “Unknown”).

## Outgoing CDPN Digits

The outgoing CDPN digits are determined based on several factors, including the CDPN NAI of the incoming CDPN and the format of the digits in the incoming CDPN. If the incoming CDPN NAI = Unknown, then the outgoing CDPN digits will be the same as the digits received in the incoming message with the exception of the addition of RN or SP. In these cases, the RN or SP is placed between the Escape Code (if dialed) plus Country Code (if number was International) and the DN. If the incoming CDPN NAI = International or National, the outgoing digits are prefixed by the RN or SP, and also by an “Insert Prefix” which is a user-configurable parameter in the EAGLE 5 ISS. In these cases, the Insert Prefix always precedes any other digits. In the case of a National format number, the RN or SP immediately follows the Insert Prefix. In the case of an International format number, the Country Code is placed between the Insert Prefix and the RN/SP.

The inclusion of the Insert Prefix is based on the incoming CDPN NAI parameter and whether or not an Insert Prefix is provisioned. There is one Insert Prefix for International and one for National, and the two are independent. For example, if an Insert Prefix is provisioned for International but not for National, then the International prefix will be inserted in messages which were received with CDPN NAI = International in addition to the RN/SP, but no prefix will be inserted in message received with CDPN NAI = National - only the RN/SP would be inserted in these messages.

In most cases, this Insert Prefix will simply be equal to the International or National Escape Codes used in the network. The EAGLE 5 ISS allows this parameter to be provisioned so that it can be any value required by the operator.

## IDPR Commands

This section provides a description of the user interface for maintenance, operations, and measurements commands for IDPR. The commands that follow allow provisioning and operations activities for DSM cards.

Complete descriptions of these commands are shown in detail in the *Commands Manual*, including parameter names, valid values, and output examples for the commands.

### **chg/enable-ctrl-feat**

This command is support the provisioning of the Feature Activation Key (FAK) to enable the Prepaid IDP Query Relay feature.

## Prepaid IDP Query Relay Feature

### **chg-prefix / rtrv-prefix**

This command is used to enter the name of a feature and relate it to a Prefix, and to specify an ID value that is used to refer to the prefix from another table.

Refer to the *Commands Manual* for details on using these commands.

### **ent-csl / chg-csl / dlt-csl / rtrv-csl**

Common screening commands are used for handling screening requirements of various features. The screenings are done on digit string or point codes. For IDP Relay feature, 4 such screening lists are required. Each of the four screening is based on digit string.

- GTA screening list - This list is used to compare the SCCP CDPA GT from the incoming message into this list. If not found, the message falls to GTT handling.
- CCNDC screening list - This screening list is used to compare the conditioned TCAP DN in international format into this list. If not found, the message falls to GTT handling.
- SKBCSM screening list - This screening list is used to compare the concatenated SK + BCSM from the incoming message into this list. If not found, the message falls to GTT handling.
- Delete prefix screening list - When performing number conditioning for incoming NAI=Unknown case, this list is checked for IEC or NEC. This is checked by searching the TCAP DN on this list.

Refer to the *Commands Manual* for details on using this command.

### **ent-srvsel / dlt-srvsel / chg-srvsel / rtrv-srvsel**

The IDPR service selector (*srvsel*) commands are used to provision new selectors for the IDPR service, providing greater flexibility when provisioning the type of messages that require IDPR processing. There are four variants, each of which is described in the following sections: *ent-srvsel*, *chg-srvsel*, *dlt-srvsel*, and *rtrv-srvsel*. For further details on the EAGLE 5 ISS IDPR service selector commands (such as command rules and output format), refer to the *Commands Manual*.

**rept-stat-sccp**

This command is used to display the status of the SCCP and VSCCP cards and the GTT (Global Title Translation), G-Flex (GSM Flexible Numbering), G-Port (GSM Mobile Number Portability), A-Port (ANSI Mobile Number Portability), INP (INAP-based Number Portability), AINPQ (ANSI-41 INP Query), EIR (Equipment Identity Register), and IDPR (Prepaid IDP Query Relay Feature) services executing on those cards. This command also displays any cards that are denied SCCP service. Refer to the *Commands Manual* for details on using this command.

**IDPR Measurements**

Four measurement registers are defined for the IDPR. All registers added in this feature are reported in the STP System Total (SYSTOT-STP) report. The registers are as follows:

- **IDPRMSERR** The total number of MSU's selected for IDPR service which could not be processed due to errors in encoding, decoding, or formatting.
- **IDPRMSFAIL** Total number of MSU's selected for IDPR service which fell through to GTT due to (1) no match on MSISDN in MNPDB, or (2) match on MSISDN but no association to RN or SP.
- **IDPRMSRCV** Total number of MSU's received and selected for IDPR service. This register includes counts for MSU's that resulted in both successful and unsuccessful MNPDB lookups.
- **IDPRMSSUCC** Number of MSU's selected for IDPR service for which the MNPDB lookup resulted in a match on MSISDN with association to an RN or SP.

**Prepaid IDP Query Relay Provisioning and Activation**

The following gives the general sequence of the provisioning required to support IDP Relay on the EAGLE 5 ISS. This procedure assumes INP and GTT are provisioned and activated.

**Procedure**

1. Use the following command to enter the NT serial number.

```
ent-serial-num:serial=<System NT serial number>:lock=yes
```

Enter NT serial number into EAGLE 5 ISS database. If the NT serial number is already entered, then ignore this step.

## Prepaid IDP Query Relay Feature

2. Enter the `enable-ctrl-feat` command to enable the IDPR.

```
enable-ctrl-feat:partnum=893016001:fak=<Feature Access Key>
```

---

3. Enter the `chg-stpopts` command to enable the DEFCC (if not already present/entered due to another feature).

```
chg-stpopts:DEFCC=48
```

---

4. Enter the `chg-ctrl-feat` command to activate the IDPR.

```
chg-ctrl-feat:partnum=893016001:status=on
```

---

5. Enter the `ent-srvsel` command to enter IDPR Global Title Selectors These selectors trigger INP as well as IDPR processing.

```
ent-srvsel:gtii=4:tt=20:np=e164:nai=intl:serv=idpr:ssn=*
```

\*There can be multiple entries for this command. This example sets up the service selectors needed to select incoming messages with GTI=4, NP=E164, TT=20 and NAI=INTL selected for IDPR service.

---

6. Optional - Enter the international insert Prefix in the prefix table.

```
chg-prefix:feat="Prepaid IDP Query  
Relay":prefixnum=1:prefix=862
```

---

7. Optional - Enter the national insert Prefix in the prefix table.

```
chg-prefix:feat="Prepaid IDP Query Relay":prefixnum=2:prefix=0
```

---

8. Optional - Control for NAI in the outgoing TCAP DN (incoming or default).

```
chg-prefix:feat="Prepaid IDP Query Relay":prefixnum=3:prefix=1
```

---

9. Optional - if the SCCP CGPA DEFCC check is ON or OFF.

```
chg-prefix:feat="Prepaid IDP Query Relay":prefixnum=4:prefix=1
```

---

10. Use the `ent-csl` command to enter Digit String (DS) entries in the CC+NDC list

```
ent-csl:pn=893016001:list=ccnc:ds=48
```

There can be multiple entries for this command. There should be minimum of one entry for the feature to work.

The entry can be just with country code - same value as in DEFFCC parameter.

---

11. Use the `ent-csl` command to enter Digit String (DS) entries in the GT list.

```
ent-csl:pn=893016001:list=gt:ds=456
```

There can be multiple entries for this command. There should be minimum of one entry for the feature to work. This digit should match the called party number in the SCCP CDPA.

---

12. Use the `ent-csl` command to enter Digit String (DS) entries in the SKBCSM list.

```
ent-csl:pn=893016001:list=skbcsm:ds=h'0x1402
```

There can be multiple entries for this command. There should be minimum of one entry for the feature to work. This digit should match the service key value and the event BCSM value from the IDP message.

---

13. Optional - Use the `ent-csl` command to enter Digit String (DS) entries in the DELPFX list.

```
ent-csl:pn=893016001:list=delpfx:ds=789:p1=1
```

There can be multiple entries for this command. This digit should match the IEC(p1=2) or NEC(p1=1) in the incoming TCAP DN when the NAI is unknown.

---

# Index

## Numerics

100% of DSM memory, 5-7  
100BASE-T, 2-14  
100BASE-T Ethernet bus, 2-5  
10BASE-T, 2-14  
10BASE-T Ethernet bus, 2-5  
21 digits of CDPA, 2-11  
80% of IS-NR LIMs, 5-4  
80% Threshold of Support, 5-9

## A

access code, 2-2, 2-8  
ACN, 1-12  
acronyms, list, 1-12  
act-file-trns, 5-25  
act-gpl, 3-12  
Actions Taken When Hardware  
  Invalid, 5-6  
Actions Taken When System is in Unstable  
  Loading Mode, 5-10  
Activate File Transfer, 5-25  
activate INP subsystem, 4-43  
activate signaling link, 4-19, 4-20, 4-35  
activate signaling link, act-slk  
  SS7IPGW, 4-19, 4-20, 4-35  
active EPAP, 2-5, 3-11  
act-slk, 4-6, 4-20  
add capability PC, 4-10  
add mated application, 4-18  
add route for new DPC, 4-17  
add signaling link, 4-16  
ADL, 1-12  
administering INP/AINPQ features, 3-1  
admonishments, 1-9  
ADU, 1-12  
AINPQ, 1-12  
alarm condition, 5-3  
alarm totals, 3-10  
alarms, 5-15  
allow DSM card, 4-44  
allow inhibited card, 4-19, 4-25, 4-34  
alw-card, 3-11, 4-5, 4-6, 4-7, 4-19, 4-25, 4-34,  
  5-6, 5-10  
alw-map-ss, 4-43

ANSI-41 Return Result with Routing  
  Digits, 2-21  
ANSI-41 Return Result without Routing  
  Digits, 2-22  
APDU, 1-12  
appl=vsccp, 4-16, 4-22, 4-30  
assign routes and linksets, 4-10  
assign service selectors, 4-42  
AuC, 1-12

## B

backup and restore operations, 2-7  
broadcast signaling point code group, 4-37

## C

Called Party Number, 2-7, 2-11  
capability point code, 4-10, 4-11, 4-12, 4-36  
card loading interrupted or aborted, 5-10  
Card Related MPS Alarms, 5-19  
caution  
  changing point code, 4-4, 4-12  
  init-sys command, 4-5, 4-13  
Caution icon, 1-9  
CC, 1-12  
CCBS, 1-12  
CCNR, 1-12  
CCRNDN, 1-12  
CDPA, 1-12  
CDPN, 2-7, 2-19  
CDPN digits, 2-20  
CDPN NAI, 2-20  
cdpnnai, 2-20  
cdpnpfx, 2-11, 2-23, 2-24  
CDU, 1-12  
CGPA, 1-12  
change link parameters, 4-24, 4-33  
change TCP/IP information for DSM, 4-23,  
  4-32  
change true PC, 4-10  
changing point code  
  caution, 4-4, 4-12  
chg-feat, 4-8  
  gflex=on, 4-8, 4-36  
chg-gpl, 3-12

- chg-inpopts, 2-11, 2-19, 2-20, 3-13, 4-9, 4-40
  - chg-ip-card, 3-14, 4-6, 4-7, 4-23, 4-32
  - chg-ip-lnk, 3-14, 4-6, 4-7, 4-24, 4-33
  - chg-map, 3-11
  - chg-sid, 3-5, 4-4, 4-8, 4-12, 4-36
  - chg-srvsel, 3-5, 6-15
  - chg-stpopts, 3-4, 4-8, 4-39, 5-24
  - Code and Application Data Loading, 5-8
  - command
    - alw-card, 5-6
    - alw-map-ss, 4-43
    - chg-inpopts, 2-11, 2-19, 4-9, 4-40
    - chg-map, 3-11
    - chg-sid, 3-5, 4-4, 4-8, 4-12, 4-36
    - chg-stpopts, 5-24
    - dlt-csp, 3-13
    - dlt-homern, 3-5
    - dlt-map, 3-11
    - ent-cspc, 4-8, 4-37
    - ent-homern, 3-5, 4-41
    - ent-map, 3-11, 4-8, 4-38
    - ent-srvsel, 3-5, 4-42
    - ent-ss-appl, 4-8, 4-39
    - init-sys, 4-5, 4-13
    - rept-stat-epap, 5-2, 5-7
    - rept-stat-sccp, 4-44, 5-2, 5-7
    - rept-stat-sys, 5-7, 5-8
    - rtrv-cspc, 4-8, 4-37
    - rtrv-homern, 4-9, 4-42
    - rtrv-inpopts, 3-13, 4-9, 4-41
    - rtrv-map, 3-11, 4-38
    - rtrv-sid, 3-5, 4-36
    - rtrv-srvsel, 3-5, 6-15
    - rtrv-ss-appl, 4-8, 4-39
  - Commands, 3-1, 6-14
  - conditioning number, 2-12
  - Conditions That Create an Unstable Loading Mode, 5-10
  - configuration parameters, 2-2
  - configure Eagle point code, 4-4, 4-12
  - configuring INP capability point code, 4-36
  - congestion indicator, 5-3
  - Connect Response, 2-21
  - Contents of DSM Status Messages, 5-4
  - Continue Response, 2-22
  - contract agreements, 1-8
  - Copy to or from Transfer Area, 5-25
  - copy-fta, 5-25
  - copy-gpl, 3-12
  - corrupted, 3-11
  - CPC, 1-12, 4-10
  - CPCTYPE parameter chg-sid, 4-36
  - CSL, 1-12
  - Customer Assistance, 1-10
  - Customer Provisioning Network, 2-13
  - Customer Support Center, 1-10
- D**
- Danger icon, 1-9
  - database, 2-21
    - GTT, 5-27
    - INP, 5-27
    - loading complete, 5-8
    - look up, 2-11, 2-21
    - look-up, 2-19
    - look-up failure, 2-19
    - MAP, 4-39
    - memory requirements, 5-7
    - national, 2-17
    - NPDB, 2-2, 2-5
    - provisioned, 2-5
    - query, 2-2, 2-8
    - records, 2-5
    - RTDB, 2-8
    - search, 2-11, 2-12
    - size requirements, 5-7
    - subscriber lookup, 2-22
  - database administration, 2-18
  - Database Download Starting Record Number, 5-4
  - database exception status, 3-11
  - Database Level Number, 5-4
  - DCB, 1-12
  - debugging domain name server (DNS) to IP addressing tables, 3-16
  - decoded INAP CDPN digits, 2-20
  - defcc, 5-24
  - defndc, 5-24
  - Delete Entry from File Transfer Area, 5-25
  - Design Overview and System Layout, 2-4, 6-18
  - destination point code, 2-18
  - destination point codes, 4-4, 4-10
  - DGTSDIAL, 1-12
  - dial-up modem, 5-25

## Index

- Dial-Up PPP Network, 2-16
- disp-fta-dir, 5-25
- display current IP host information, 4-22, 4-31
- display current link parameters, 4-24, 4-33
- Display File Transfer Area, 5-25
- display signaling link status, rept-stat-slk SS7IPGW, 4-20
- dlt-card, 3-11, 4-7, 4-28
- dlt-csp, 3-13
- dlt-cspc, 3-13
- dlt-fta, 5-25
- dlt-homern, 3-5
- dlt-ip-host, 3-14
- dlt-map, 3-11
- DLTPFX, 1-12
- dltprfx, 2-11, 2-12
- dlt-srvsel, 3-5, 6-15
- DN, 1-12
- DNS, 3-16
- document part number, 1-8
- Documentation Packaging, Delivery, and Updates, 1-8
- download, 2-10
- download files from STP, 5-25
- DPC, 1-12, 4-4, 4-10
- dpci, dpcn parameters, 4-10
- DRA, 1-12
- DSM, 1-13
- DSM (Database Services Module), 2-8
- DSM Application Data Loading, 5-8
- DSM Applique Memory Verification, 5-5
- DSM cards, 2-3, 2-8
- DSM Code Loading, 5-8
- DSM Main Board Verification, 5-5
- DSM Memory Capacity Status Reporting, 5-7
- DSM Memory Size, 5-4
- DSM Networks, 2-14
- DSM provisioning module, 2-5
- DSM Status Messages – When Sent, 5-3
- DSM Status Requests, 5-3
- DSM/EPAP IP link alarms, 3-9
- DSM-EPAP Link, 5-17
- E**
- E.164, 2-11
- E.164 MSISDN number (DN), 3-18
- EAGLE 5 ISS commands, 3-1
- EAGLE 5 ISS DSM databases, 2-3
- EAGLE 5 ISS maintenance terminal, 2-18
- EAGLE 5 ISS mated application table, 2-18
- Eagle Commands for INP, 3-1
- EAGLE Provisioning Application Processor, 2-3, 2-6
- EMS, 1-13
- enable INP feature, 4-35, 4-36
- ent-bp, 3-13
- ent-card, 3-11, 4-5, 4-6, 4-7, 4-16, 4-22, 4-30, 5-11
- ent-cspc, 3-13, 4-8, 4-37
- ent-dstn, 4-5, 4-14
- enter destination PC, 4-14
- enter DPC, 4-14
- enter INP service selectors, 4-9
- enter linkset, 4-15
- entering
  - init-sys command, 4-5, 4-13
- ent-homern, 3-5, 4-41
- ent-ip-host, 3-14, 4-6, 4-7, 4-22, 4-31
- Entity Point Codes and Routes, 2-18
- ent-ls, 4-5, 4-15
- ent-map, 3-11, 4-5, 4-8, 4-18, 4-38
- entries in the Internet Protocol host table, 3-14
- ent-rte, 4-5, 4-17
- ent-slk, 4-5, 4-16
- ent-srvsel, 3-5, 4-9, 4-42
- ent-ss-appl, 4-8, 4-39
- ent-trace, 3-17
- EOAP, 1-13
- EPAP, 1-13, 2-3, 2-6
- EPAP - DSM Loading Interface, 5-9
- EPAP (Eagle Provisioning Application Processor), 2-8
- EPAP A, 2-4
- EPAP B, 2-4
- EPAP database, 2-20
- EPAP IP Addresses in the DSM Network, 2-16
- EPAP Maintenance Blocks, 5-2
- EPAP network addresses, 2-15
- EPAP platforms, 2-4
- EPAP Status and Alarm Reporting, 5-2
- EPAP Status and Error Reporting via

- Maintenance Blocks, 2-10
- EPAP Sync Network, 2-14
- EPAP system, 2-4
- EPAP/PDBA Overview, 2-6
- equipment damage, 1-9
- ES, 1-13
- Ethernet links, 2-5
- ETSI, 1-13
- exception status, 3-11

**F**

- failure of database look-up, 2-19
- feature access key, 1-2
- Feature Description, 2-1, 6-1
- File Transfer Area, 5-25
- force option, 5-11
- frequency limiting, 2-20
- FTA, 1-13, 5-25

**G**

- General Procedure for INP Activation, 4-2, 4-4
- G-Flex, 1-13
- Global Title digits (GT), 3-18
- Global Title Translation, 2-10
- global title translations, 1-2
- GMSC, 1-13
- GPDB, 1-13
- GPL, 1-13
- G-Port, 1-13
- G-Port Data Initialization, 5-9
- group code, 4-10
- GSM, 1-13
- GSM Alarms
  - Subsystem Alarms, 5-21, 5-22
- GSM and INP System Hardware Verification, 5-5
- GSM Status Reporting, 5-7
- GSM Subsystem Alarms, 5-21
- GSM System and INP System Status Reporting, 5-7
- GSMOPTS table, 3-4
- GTA, 1-13
- GTAI, 1-13
- GTI, 1-13
- GTT, 1-2, 1-13

**H**

- HCAP, 1-13
- hexadecimal digits, 2-11
- high-speed Ethernet links, 2-5
- HLR, 1-13
- Home RNs, 2-19
- HOMERN, 2-19, 2-23
- host=epap-a, 4-22, 4-31
- Hourly Maintenance Report, 5-4
- HRN, 1-13
- HRNs, 2-19

**I**

- IAM, 1-13
- icons, 1-9
- IDP Relay, 6-1
- IMSI, 1-13
- IN, 1-13
- INAP, 1-13
- incoherent, 3-11
- inconsistent, 3-11
- Incremental Downloading, 2-10
- INE, 1-13
- inh-alm, 3-13
- inh-card, 3-11, 4-7, 4-28, 5-10, 5-11
- inhibit LIMs, 5-9
- init-card, 4-9, 4-44, 4-45
- init-sys, 4-5, 4-13
- init-sys command
  - caution, 4-5, 4-13
  - re-entering, 4-5, 4-13
- INN, 1-14
- INP, 1-14
- INP Activation Unsuccessful due to
  - Insufficient Database, 5-15
- INP Alarms
  - Card Related MPS Alarms, 5-19
  - DSM-EPAP Link, 5-17
  - MPS (EPAP) Alarms, 5-17
- INP capability point code configuring, 4-36
- INP Considerations, 2-10
- INP Enabled, but Database Exceeds DSM Memory, 5-14
- INP Enabled, but DSM Memory Insufficient for Database, 5-13
- INP Enabled, but DSM Memory Less Than 1 GB, 5-12

## Index

- INP Enabled, but DSM Not Connected to EPAP, 5-13
  - INP Enabled, Normal Operating Sequence, 5-12
  - INP Feature, 2-7
  - INP Feature Activation, 4-1
  - INP Measurements, 5-25
  - INP Message Protocol, 2-21, 6-18
  - INP Message Relay, 2-11, 2-22, 2-23
  - INP Not Enabled at First, but then Activated on DSM, 5-14
  - INP Not Enabled, DSM Running in TSM Emulation, 5-12
  - INP Query, 2-22, 2-23
  - INP Related Alarms, 5-15
  - INP Service Selectors, 4-42
  - INP Status Reporting, 5-7
  - INP Subsystem Alarms, 5-21
  - INP Subsystem UIMs, 5-24
  - INP UAMs, 5-15
    - Card Related MPS Alarms, 5-19
    - DSM-EPAP Link, 5-17
    - MPS (EPAP) Alarms, 5-17
    - Subsystem Alarms, 5-21, 5-22
  - INP/AINPQ number normalization, 2-2
  - INP/AINPQ Subsystem Related UIMs, 5-24
  - INP/AINPQ VSCCP, 5-5
  - input/output interfaces, 2-2
  - Install, 4-29
  - insufficient memory alarm, 5-7
  - Insufficient SCCP Service, 5-9
  - internal SNAI, 2-7
  - international, 2-12
  - international format, 2-12
  - international number, 2-7, 2-8
  - International PC, 2-18
  - international version, 2-2
  - Internet Protocol host table, 3-14
  - intl, 2-12, 2-24
  - Introduction, 1-1
  - invalid DN, 2-11
  - IP, 1-14
  - IP communications, 2-9
  - IP host table, 3-14
  - IP link alarms, 3-9
  - IP Multicast, 2-9
  - ipaddr=192.168.122.nnn, 4-22, 4-31
  - ISDN, 1-14
  - IS-NR, 1-13
  - ISS, 1-14
  - ISUP, 1-14
  - ITU, 1-14
  - ITU national duplicate PC, 4-10
  - ITU national point code, 4-10
  - ITUDUPPC, 4-10
- ## L
- LIM, 1-14
  - LIMs denied SCCP service, 5-9
  - link alarms, 3-9
  - link congestion, 5-3
  - linksets assigned, 4-10
  - list supported pass commands, 3-17
  - LNP, 1-2, 1-14
  - Load Mode Status, 5-4
  - Loading Mode Support, 5-9
  - Loading Mode Support Status Reporting, 5-8
  - loc parameter, 4-17
  - loc=1103, 4-16, 4-22, 4-30
  - Local Memory Validation, 5-5
  - Local Number Portability, 1-2
  - LSS, 1-14
- ## M
- Maintenance
    - Card Related MPS Alarms, 5-19
    - DSM-EPAP Link Alarms, 5-17
    - MPS (EPAP) Alarms, 5-17
    - Subsystem Alarms, 5-21, 5-22
  - Maintenance and Measurements, 5-1
  - maintenance application traffic, 2-14
  - maintenance blocks, 2-10
  - maintenance information, 2-15
  - Maintenance Requirements, 5-1
  - maintenance terminal, 2-18
  - manual audience, 1-2
  - Manual Organization, 1-2
  - MAP, 1-14
  - MAS, 1-14
  - matching prefix, 2-20
  - mated application, 4-38
  - Mated Application Considerations, 2-18
  - mated EPAP system, 2-4

mated MPS servers, 2-4  
 MCAP, 1-14  
 MEA, 1-14, 5-6  
 Measurement Reports, 5-27  
 memory requirements, 5-7  
 Message discrimination, 2-21  
 MGT, 1-14  
 Mismatch of Equipment and  
     Attributes, 5-6  
 MNP, 1-14  
 MPS, 1-14  
 MPS (EPAP) Alarm, 5-17  
 MPS platform, 2-3  
 MPS/EPAP Platform, 2-3  
 MPS/EPAP platform, 2-8  
 MPS/EPAP Platforms for Provisioning  
     INP, 2-4  
 MR, 1-14  
 MSC, 1-14  
 MSISDN, 1-14  
 MSRN, 1-14  
 MSU, 1-14  
 MSU Trap and Trace Command, 3-17  
 MSU trigger, 3-17  
 MTP, 1-14  
 multiple trigger criteria, 3-17  
 Multi-Purpose Server, 2-3

## N

NAI, 1-14, 2-12  
 NAI value, 2-12  
 NAI values, 2-2, 2-7  
 NAIV, 1-14  
 national, 2-12  
 national database, 2-17  
 National PCs, 2-18  
 natl, 2-12, 2-24  
 NC, 1-14  
 NDC, 1-14  
 NE, 1-15  
 NEBS, 1-15  
 network addresses, 2-15  
 Network Connections, 2-12  
 network installations, 1-2  
 network number portability, 2-1  
 New Pegs for Per SSP INP  
     Measurements, 5-26

New Pegs for Per System INP  
     Measurements, 5-26  
 none, 2-12  
 Non-GSM Data Initialization, 5-9  
 non-standard values, 2-20  
 NP, 1-15  
 NPA, 1-15  
 npcfmti option, 4-11  
 NPDB, 1-15, 2-2  
 NPREQ, 1-15  
 npreq, 1-15  
 NPV, 1-15  
 NSD, 1-15  
 nstall, 4-21  
 Number conditioning, 2-21  
 number conditioning, 2-2, 2-8, 2-12, 2-20  
 number conditioning error, 2-20  
 number normalization, 2-2, 2-7, 2-11  
 number portability, 2-1  
 number portability database, 2-2  
 number portability translations, 2-7

## O

OAM, 1-15  
 OAM provisioning, 2-15  
 OAP, 1-15  
 Obit Message for Abort of Card  
     Loading, 5-11  
 octets, 2-15  
 operator provisioning system, 2-17  
 OPS, 1-15, 2-17  
 organization of manual, 1-2  
 original telephone number, 2-1  
 Origination point code, 3-18  
 OTID, 1-15  
 Overview of EPAP to DSM  
     Communications, 2-9  
 Overview of INP, 1-1

## P

parameter  
     CPCTYPE  
         chg-sid, 4-36  
     PCI  
         chg-sid, 4-12  
     PCN  
         chg-sid, 4-12

## Index

pass, 3-14, 4-6, 4-7, 4-26, 4-34  
  cmd="arp", 3-16  
  cmd="help", 3-17  
  cmd="netstat", 3-15  
  cmd="nslookup", 3-16  
  cmd="Ping", 3-15  
PC, 1-15  
PCI parameter  
  chg-sid, 4-12  
PCN parameter  
  chg-sid, 4-12  
PDB, 1-15  
PDBA, 2-6  
PDBI, 1-15, 2-6  
Peripheral Maintenance, 5-5  
personal safety, 1-9  
PFS, 1-15  
ping parameter, 4-26, 4-34  
PLMN, 1-15  
PMTIC, 1-15, 5-5  
POI, 1-15, 2-17  
point code, 4-12  
point codes, 2-18  
point of interconnection, 2-17  
ported number lengths, 2-2  
ported-in numbers, 2-11  
PPP, 1-15  
prefix, 2-2  
prefix digits, 2-11  
prefix removal, 2-19  
prefixed CDPN or DGTSDIAL, 2-19  
Prepaid IDP Query Relay, 6-1  
Primary INP Functions, 2-21  
provision DSM cards, 2-5  
provision INP data, 2-5  
provisioned prefix, 2-12  
Provisioning Database, 2-4  
Provisioning Database Application, 2-6  
Provisioning INP Number  
  Normalization, 2-19  
Provisioning INPQ Service NAI, 2-20  
provisioning link congestion, 5-3  
Provisioning of Routing Number Prefix of  
  Node (HOMERN), 2-19  
provisioning system, 2-17  
Provlk, 1-15

## Q

QS, 1-15

## R

RAID, 1-15  
RealTime Database, 2-4  
real-time database, 2-6  
Real-time Memory Validation, 5-5  
Receiving INP Data from a National  
  Database, 2-17  
re-entering init-sys command, 4-5, 4-13  
reinitialize system, 4-13  
Related Publications, 1-3  
Reliable Multicast Transport Protocol, 2-9  
removal of prefix, 2-19  
removal of RN prefixes, 2-19  
replace TSM card with DSM card, 4-21,  
  4-29  
rept-meas, 3-9  
rept-stat-alm, 3-10  
rept-stat-card, 4-5, 4-6, 4-7, 4-9, 4-19, 4-25,  
  4-28, 4-34, 4-45  
  stat=nr, 4-27  
rept-stat-db, 3-11  
rept-stat-epap, 3-7, 5-2, 5-7  
rept-stat-gpl, 3-12  
rept-stat-sccp, 3-5, 4-44, 5-2, 5-7, 6-16  
rept-stat-slk, 4-6, 4-20  
rept-stat-sys, 3-5, 5-7, 5-8, 5-10  
rept-stat-trbl, 3-9  
reserve a subsystem number, 4-39  
Return Result with Digits, 5-26  
Return Result with Routing Digits, 2-21,  
  3-4  
Return Result without Digits, 5-26  
Return Result without Routing  
  Digits, 2-22, 3-4  
RI, 1-15  
RMTP, 1-15, 2-9  
RMTP multicast, 2-5  
RN, 1-16  
RN or SP address (Entity ID), 3-18  
RN prefixes, 2-19  
RNIDN, 1-16, 2-23  
RNNDN, 1-16, 2-23  
RNNECDN, 1-16  
RNSDN, 1-16, 2-23

route table, 2-18  
 routes and linksets assigned to the  
     DPCs, 4-10  
 routing number prefixes, 4-41  
 RS232 connection, 2-7  
 RS-232 I/O ports, 5-25  
 RTDB, 1-16  
 rtrv-card, 3-11, 4-5, 4-6, 4-7, 4-16, 4-20, 4-22,  
     4-27, 4-28, 4-31  
 rtrv-cspc, 3-13, 4-8, 4-37  
 rtrv-dstn, 4-4, 4-5, 4-10, 4-12, 4-14  
 rtrv-gpl, 3-12  
 rtrv-homern, 3-5, 4-9, 4-42  
 rtrv-inpopts, 3-13, 4-9, 4-41  
 rtrv-ip-card, 3-14, 4-6, 4-7, 4-24, 4-32  
 rtrv-ip-host, 3-14, 4-6, 4-7, 4-22, 4-23, 4-31,  
     4-32  
 rtrv-ip-lnk, 3-14, 4-6, 4-7, 4-24, 4-25, 4-33,  
     4-34  
 rtrv-ls, 4-5, 4-15  
 rtrv-map, 3-11, 4-5, 4-8, 4-12, 4-19, 4-38  
 rtrv-rte, 4-4, 4-5, 4-11, 4-12, 4-18  
 rtrv-sid, 3-5, 4-4, 4-5, 4-8, 4-10, 4-14, 4-36  
 rtrv-slk, 4-5, 4-17  
 rtrv-srvsel, 3-5, 4-9, 4-43, 6-15  
 rtrv-ss-appl, 4-8, 4-39  
 rtrv-stpopts, 3-4, 4-4, 4-11, 4-40

## S

SCCP, 1-16  
 SCCP portion, 2-22  
 SCF, 1-16  
 SCM, 1-16, 5-6  
 Scope and Audience, 1-2  
 SCP, 1-16  
 self identification of system, 4-10  
 sequential steps to activate INP, 4-1  
 service interruption, 1-9  
 service NAI values, 2-2  
 Service Nature of Address Indicator, 2-8  
 service provider number portability, 2-1  
 service selectors, 4-42  
 Serviceability Hints, 2-17  
 set trace, 3-18  
 Signaling Point (SP) Entity ID, 2-17  
 signaling points, 4-37  
 SIM, 1-16

SMS, 1-16  
 SMSC, 1-16  
 SNAI, 1-16, 2-7, 2-12  
 SNP, 1-16  
 SOR, 1-16  
 SP, 1-16  
 SPC, 1-16  
 special prefix, 2-2, 2-8, 2-11  
 special prefixes, 2-2  
 specify ITU national PC format, 4-11  
 speed=10, 4-24, 4-33  
 SRF, 1-16  
 SRI, 1-16  
 srvsel commands, 3-5, 6-15  
 SS7IPGW  
     activate signaling link, act-slk, 4-19,  
         4-20, 4-35  
     display signaling link status,  
         rept-stat-slk, 4-20  
 SSF, 1-16  
 SSN, 1-16  
 SSP, 1-16  
 SSPI/SSPN, 3-18  
 ST, 1-16  
 Stages of INP Execution, 2-22  
 standby EPAP, 2-5, 3-11  
 State Transitions during Start-Up, 5-11  
 steps to activate INP, 4-1  
 STP, 1-16  
 sub, 2-12, 2-24  
 subscriber, 2-12  
 subscriber database lookup, 2-22  
 Subsystem Related UIMs, 5-24  
 Subsystem UIMs, 5-24  
 switch telephone service, 2-1  
 System Configuration Manager, 5-6  
 System Debug Services (SDS)  
     Commands, 3-17  
 system point code, 4-11  
 system self-identification, 4-10  
 System Status Reporting, 5-7

## T

TCAP, 1-16  
 TCP, 1-16  
 TDM, 1-16  
 TDM-resident data tables, 5-8

## Index

- telnet, 2-7
- TPC, 1-17
- trace, 3-18
- translations, 2-7
- trap messages, 3-18
- trap-and-trace function, 3-17
- trigger criteria, 3-18
- troubleshooting network interface and routing configuration, 3-15
- troubleshooting private EPAP/DSM IP network, 3-15
- true point code, 4-10
- TT, 1-17
- Two UIMs for One MSU, 2-20
- type=dsm, 4-16, 4-22, 4-30

## U

- UAM, 1-17
- UDP, 1-17, 2-9
- UDT, 1-17
- UDTS, 1-17, 2-22
- UIM, 1-17
- UIMs, 5-24
- unhb-alm, 3-13
- Unit Data Transfer Service, 2-22
- Unsolicited Information Message, 5-24
- Unstable Loading Mode, 5-6
- unstable loading mode, 5-6, 5-8
- User Datagram Protocol, 2-9
- user interface for maintenance and measurements, 3-1, 6-14
- Using force Option, 5-11

## V

- variable-length numbers, 2-2
- verify and correct IP stack ARP tables, 3-16
- verify IS-NR card status, 4-19, 4-25, 4-34
- verify new link parameters, 4-25, 4-34
- VLR, 1-17
- VMSC, 1-17
- VSCCP, 1-17, 5-5
- VSCCP Capacity, 5-9
- VxWorks Signalling Connection Port, 5-5

## W

- Warning icon, 1-9

