

Tekelec EAGLE[®] 5 Integrated Signaling System

Feature Manual - IS41 GSM Migration

910-5601-001 Revision B

February 2009



**Copyright 2009 Tekelec
All Rights Reserved
Printed in USA**

Notice

Information in this documentation is subject to change without notice. Unauthorized use, copying, or translation of this documentation can result in civil or criminal penalties.

Any export of Tekelec products is subject to the export controls of the United States and the other countries where Tekelec has operations.

No part of this documentation may be reproduced, translated, or transmitted in any form or by any means, electronic or mechanical, including photocopying or recording, for any purpose without the express written permission of an authorized representative of Tekelec.

Other product names used herein are for identification purposes only, and may be trademarks of their respective companies.

RoHS 5/6 - As of July 1, 2006, all products that comprise new installations shipped to European Union member countries will comply with the EU Directive 2002/95/EC "RoHS" (Restriction of Hazardous Substances). The exemption for lead-based solder described in the Annex will be exercised. RoHS 5/6 compliant components will have unique part numbers as reflected in the associated hardware and installation manuals.

WEEE - All products shipped to European Union member countries comply with the EU Directive 2002/96/EC, Waste Electronic and Electrical Equipment. All components that are WEEE compliant will be appropriately marked. For more information regarding Tekelec's WEEE program, contact your sales representative.

Trademarks

The Tekelec logo, EAGLE, G-Flex, G-Port, IP7, IP7 Edge, and IP7 Secure Gateway are registered trademarks of Tekelec. TekServer, A-Port, EAGLE 5 ISS, and V-Flex are trademarks of Tekelec. All other trademarks are the property of their respective owners.

Patents

This product is covered by one or more of the following U.S. and foreign patents:

U.S. Patent Numbers:

5,732,213; 5,953,404; 6,115,746; 6,167,129; 6,324,183; 6,327,350; 6,456,845; 6,606,379; 6,639,981; 6,647,113; 6,662,017; 6,735,441; 6,745,041; 6,765,990; 6,795,546; 6,819,932; 6,836,477; 6,839,423; 6,885,872; 6,901,262; 6,914,973; 6,940,866; 6,944,184; 6,954,526; 6,954,794; 6,959,076; 6,965,592; 6,967,956; 6,968,048; 6,970,542; 6,987,781; 6,987,849; 6,990,089; 6,990,347; 6,993,038; 7,002,988; 7,020,707; 7,031,340; 7,035,239; 7,035,387; 7,043,000; 7,043,001; 7,043,002; 7,046,667; 7,050,456; 7,050,562; 7,054,422; 7,068,773; 7,072,678; 7,075,331; 7,079,524; 7,088,728; 7,092,505; 7,108,468; 7,110,780; 7,113,581; 7,113,781; 7,117,411; 7,123,710; 7,127,057; 7,133,420; 7,136,477; 7,139,388; 7,145,875; 7,146,181; 7,155,206; 7,155,243; 7,155,505; 7,155,512; 7,181,194; 7,190,702; 7,190,772; 7,190,959; 7,197,036; 7,206,394; 7,215,748; 7,219,264; 7,222,192; 7,227,927; 7,231,024; 7,242,695; 7,254,391; 7,260,086; 7,260,207; 7,283,969; 7,286,516; 7,286,647; 7,286,839; 7,295,579; 7,299,050; 7,301,910; 7,304,957; 7,318,091; 7,319,857; 7,327,670

Foreign Patent Numbers:

EP1062792; EP1308054; EP1247378; EP1303994; EP1252788; EP1161819; EP1177660; EP1169829; EP1135905; EP1364520; EP1192758; EP1240772; EP1173969; CA2352246

Ordering Information

Your Tekelec Sales Representative can provide you with information about how to order additional discs.

Table of Contents

Chapter 1: Migration Introduction.....	1
Overview.....	2
Scope and Audience.....	2
Manual Organization.....	2
Documentation Admonishments.....	3
Customer Care Center.....	3
Emergency Response.....	5
Related Publications.....	6
Documentation Availability, Packaging, and Updates.....	6
Locate Product Documentation on the Customer Support Site.....	7
Chapter 2: Feature Description.....	9
Introduction.....	10
IS412GSM Migration Changes.....	12
MPS/EPAP Platform.....	12
EPAP/PDBA Overview.....	14
Subscriber Data Provisioning.....	15
EPAP (EAGLE Provisioning Application Processor).....	17
Service Module Cards.....	18
Network Connections.....	21
IGM Protocol.....	25
General Numbering Requirements.....	41
Maintenance.....	42
Chapter 3: EAGLE 5 ISS Migration Commands.....	45
Introduction.....	46
EAGLE 5 ISS Commands for Migration.....	46
EAGLE 5 ISS GSM System Options Commands.....	47
EAGLE 5 ISS IS41 Options Commands.....	49
EAGLE 5 ISS Migration Service Selector Commands.....	54
EAGLE 5 ISS Feature Key Control Commands.....	58
EAGLE 5 ISS MNP SCCP Service Commands.....	59
Maintenance and Measurements User Interface Commands.....	61

Chapter 4: Migration Feature Activation.....	69
Introduction.....	70
Prerequisites.....	71
Feature Activation Overview.....	72
Feature Activation Procedure.....	77
The 1100 TPS/Service Module Card for ITU NP Feature.....	106
Activating the 1100 TPS/Service Module Card for ITU NP Feature	
.....	107
Activating the E5-SM4G Throughput Capacity Feature.....	112
Chapter 5: Maintenance and Measurements.....	119
Hardware Requirements.....	120
EPAP Status and Alarms.....	120
DSM Status Requests.....	121
IGM System Status Reports.....	121
Code and Application Data Loading.....	123
EPAP Application Data Loading.....	123
State Transitions during Start-Up.....	126
IGM Related Alarms.....	128
IGM UIMs.....	136
IGM Related Measurements.....	139
Glossary.....	145

List of Figures

Figure 1: MPS/EPAP Platform Architecture.....	12
Figure 2: Subscriber Data Provisioning Architecture (High Level).....	16
Figure 3: Database Administrative Architecture.....	17
Figure 4: Customer Provisioning Network.....	21
Figure 5: EPAP Sync Network.....	22
Figure 6: DSM Networks.....	23
Figure 7: Dial-Up PPP Network.....	24
Figure 8: Message Control Flow.....	38
Figure 9: Push in Inject/Eject Clamp.....	88
Figure 10: Push Inject/Eject Clamps Outward.....	95
Figure 11: Push in Inject/Eject Clamps.....	96
Figure 12: Obit Message for Abort of Card Loading.....	125
Figure 13: IGM Not Enabled, Service Module Card Running in TSM Emulation.....	126
Figure 14: IGM Enabled, Normal Operating Sequence.....	126
Figure 15: IGM Enabled, but Service Module Card Not Connected to EPAP.....	126
Figure 16: IGM Enabled, but Service Module Card Memory Insufficient for Database.....	127
Figure 17: IGM Enabled, but Database Exceeds Service Module Card Memory.....	127
Figure 18: IGM Not Enabled at First, but then Activated on Service Module Card.....	127
Figure 19: IGM Activation Unsuccessful due to Insufficient Database.....	128

List of Tables

Table 1: Admonishments.....	3
Table 2: EPAP IP Addresses in the DSM Network.....	24
Table 3: IGM Customer Message Processing.....	27
Table 4: IS412GSM Migration Customer Message Processing.....	28
Table 5: IGM and G-Port Customer Message Processing.....	29
Table 6: IGM and A-Port Message Processing.....	30
Table 7: IGM, A-Port, and G-Port Customer Message Processing.....	31
Table 8: DigitAction Applications.....	32
Table 9: MNP SCCP Service Re-Route Capability Summary.....	36
Table 10: MTP Routed Handling Example 1.....	39
Table 11: MTP Routed Handling Example 2.....	40
Table 12: MTP Routed Handling Example 3.....	40
Table 13: Commands for EAGLE 5 ISS Migration.....	46
Table 14: chg-gsmopts Parameters - Class = DATABASE.....	47
Table 15: chg-is41opts Parameters - Class = DATABASE.....	49
Table 16: ent-srvsel Parameters - Class = DATABASE.....	55
Table 17: chg-srvsel Parameters - Class = DATABASE.....	56
Table 18: dlt-srvsel Parameters - Class = DATABASE.....	56
Table 19: rtrv-srvsel Parameters - Class = DATABASE.....	57
Table 20: chg-sccp-serv Parameters - Class = DATABASE.....	59
Table 21: dlt-sccp-serv Parameters - Class = DATABASE.....	60
Table 22: IGM Related UAMs.....	128
Table 23: IGM Related UIMs.....	136
Table 24: Pegs for Per System MNP Measurements.....	140
Table 25: Pegs for Per SSP MNP Measurements.....	143
Table 26: Pegs for Per System and Per SSP MNP Measurements.....	143

Chapter 1

Migration Introduction

Topics:

- [Overview Page 2](#)
- [Scope and Audience Page 2](#)
- [Manual Organization Page 2](#)
- [Documentation Admonishments Page 3](#)
- [Customer Care Center Page 3](#)
- [Emergency Response Page 5](#)
- [Related Publications Page 6](#)
- [Documentation Availability, Packaging, and Updates Page 6](#)
- [Locate Product Documentation on the Customer Support Site Page 7](#)

This chapter provides a brief description of the IS41GSM Migration (IGM) feature of the EAGLE 5 Integrated Signaling System. The chapter also includes the scope, audience, and organization of the manual; how to find related publications; and how to contact Tekelec for assistance.

Overview

This manual provides a description, along with commands, maintenance, measurements, and configuration details associated with the Migration (IGM) feature of the EAGLE 5 ISS (Integrated Signaling System).

The IGM feature provides the mobile wireless service provider a way to migrate subscribers from IS-41 to GSM and GSM to IS-41. Once the subscriber is marked as migrated, the GSM handset is fully functional, and the migrated subscriber has the option whether to continue to receive calls on the IS-41 or GSM handset.

The Migration feature is based on the EAGLE 5 ISS platform. It is deployed in a node that is also performing the STP function.

Number lengths vary between countries and may even vary within a country. As a result, the IGM database structure supports numbers of varying length in a flexible way without necessitating software modifications. A maximum number length of 15 digits for ported numbers is supported.

Migration is an optional feature on the EAGLE 5 ISS, and can be enabled and turned on, but not off, via a feature access key. Note that Migration requires the Global Title Translation (GTT) feature and that Migration and North American LNP (Local Number Portability) are mutually exclusive on an EAGLE 5 ISS node.

Scope and Audience

This manual is intended for anyone responsible for installing, maintaining, and using the IGM feature in the EAGLE 5 ISS. Users of this manual and the others in the EAGLE 5 ISS family of documents must have a working knowledge of telecommunications and network installations.

Manual Organization




This document is organized into the following chapters:

- *Migration Introduction* on page 1 contains general information about the IGM documentation, the organization of this manual, and how to request technical assistance.
- *Feature Description* on page 9 provides a functional description of the IGM feature, including network perspectives, assumptions and limitations, a database overview, Service Module card provisioning and reloading, IGM user interface, and an audit overview.
- *EAGLE 5 ISS Migration Commands* on page 45 describes the commands that support the IGM feature, sample reports, and explanations of appropriate command usage.
- *Migration Feature Activation* on page 69 describes how to activate the IGM feature.
- *Maintenance and Measurements* on page 119 describes maintenance and measurements, including EPAP status and alarms, hardware verification messages, TSM emulation mode, IGM system status reports and commands, code and application data loading, and alarms.

Documentation Admonishments

Admonishments are icons and text throughout this manual that alert the reader to assure personal safety, to minimize possible service interruptions, and to warn of the potential for equipment damage.

Table 1: Admonishments

	<p>DANGER: (This icon and text indicate the possibility of <i>personal injury</i>.)</p>
	<p>WARNING: (This icon and text indicate the possibility of <i>equipment damage</i>.)</p>
	<p>CAUTION: (This icon and text indicate the possibility of <i>service interruption</i>.)</p>

Customer Care Center

The Tekelec Customer Care Center is your initial point of contact for all product support needs. A representative takes your call or email, creates a Customer Service Request (CSR) and directs your requests to the Tekelec Technical Assistance Center (TAC). Each CSR includes an individual tracking number. Together with TAC Engineers, the representative will help you resolve your request.

The Customer Care Center is available 24 hours a day, 7 days a week, 365 days a year, and is linked to TAC Engineers around the globe.

Tekelec TAC Engineers are available to provide solutions to your technical questions and issues 7 days a week, 24 hours a day. After a CSR is issued, the TAC Engineer determines the classification of the trouble. If a critical problem exists, emergency procedures are initiated. If the problem is not critical, normal support procedures apply. A primary Technical Engineer is assigned to work on the CSR and provide a solution to the problem. The CSR is closed when the problem is resolved.

Tekelec Technical Assistance Centers are located around the globe in the following locations:

Tekelec - Global

Email (All Regions): support.tekelec.com

- **USA and Canada**

Phone:

1-888-FOR-TKLC or 1-888-367-8552 (toll-free, within continental USA and Canada)

1-919-460-2150 (outside continental USA and Canada)

TAC Regional Support Office Hours:

8:00 a.m. through 5:00 p.m. (GMT minus 5 hours), Monday through Friday, excluding holidays

- **Central and Latin America (CALA)**

Phone:

USA access code +1-800-658-5454, then 1-888-FOR-TKLC or 1-888-367-8552 (toll-free)

TAC Regional Support Office Hours (except Brazil):

10:00 a.m. through 7:00 p.m. (GMT minus 6 hours), Monday through Friday, excluding holidays

- **Argentina**

Phone:

0-800-555-5246 (toll-free)

- **Brazil**

Phone:

0-800-891-4341 (toll-free)

TAC Regional Support Office Hours:

8:30 a.m. through 6:30 p.m. (GMT minus 3 hours), Monday through Friday, excluding holidays

- **Chile**

Phone:

1230-020-555-5468

- **Columbia**

Phone:

01-800-912-0537

- **Dominican Republic**

Phone:

1-888-367-8552

- **Mexico**

Phone:

001-888-367-8552

- **Peru**

Phone:

0800-53-087

- **Puerto Rico**

Phone:

1-888-367-8552 (1-888-FOR-TKLC)

- **Venezuela**
Phone:
0800-176-6497
- **Europe, Middle East, and Africa**
 - **Signaling**
Phone:
+44 1784 467 804 (within UK)
TAC Regional Support Office Hours:
8:00 a.m. through 7:00 p.m. (GMT), Monday through Friday, excluding holidays
 - **Software Solutions**
Phone:
+33 3 89 33 54 00
TAC Regional Support Office Hours:
8:00 a.m. through 7:00 p.m. (GMT), Monday through Friday, excluding holidays
- **Asia**
 - **India**
Phone:
+91 124 436 8552 or +91 124 436 8553
TAC Regional Support Office Hours:
10:00 a.m. through 7:00 p.m. (GMT plus 5 1/2 hours), Monday through Saturday, excluding holidays
 - **Singapore**
Phone:
+65 6796 2288
TAC Regional Support Office Hours:
9:00 a.m. through 6:00 p.m. (GMT plus 8 hours), Monday through Friday, excluding holidays

Emergency Response

In the event of a critical service situation, emergency response is offered by the Tekelec Customer Care Center 24 hours a day, 7 days a week. The emergency response provides immediate coverage, automatic escalation, and other features to ensure that the critical situation is resolved as rapidly as possible.

A critical situation is defined as a problem with an EAGLE 5 ISS that severely affects service, traffic, or maintenance capabilities, and requires immediate corrective action. Critical problems affect service and/or system operation resulting in:

- A total system failure that results in loss of all transaction processing capability
- Significant reduction in system capacity or traffic handling capability
- Loss of the system's ability to perform automatic system reconfiguration
- Inability to restart a processor or the system
- Corruption of system databases that requires service affecting corrective actions
- Loss of access for maintenance or recovery operations
- Loss of the system ability to provide any required critical or major trouble notification

Any other problem severely affecting service, capacity/traffic, billing, and maintenance capabilities may be defined as critical by prior discussion and agreement with the Tekelec Customer Care Center.

Related Publications

For information about additional publications that are related to this document, refer to the *Related Publications* document. The *Related Publications* document is published as a part of the *Release Documentation* and is also published as a separate document on the Tekelec Customer Support Site.

Documentation Availability, Packaging, and Updates

Tekelec provides documentation with each system and in accordance with contractual agreements. For General Availability (GA) releases, Tekelec publishes a complete EAGLE 5 ISS documentation set. For Limited Availability (LA) releases, Tekelec may publish a documentation subset tailored to specific feature content or hardware requirements. Documentation Bulletins announce a new or updated release.

The Tekelec EAGLE 5 ISS documentation set is released on an optical disc. This format allows for easy searches through all parts of the documentation set.

The electronic file of each manual is also available from the Tekelec Customer Support site. This site allows for 24-hour access to the most up-to-date documentation.

Printed documentation is available for GA releases on request only and with a lead time of six weeks. The printed documentation set includes pocket guides for commands and alarms. Pocket guides may also be ordered as a set or individually. Exceptions to printed documentation are:

- Hardware or Installation manuals are printed only without the linked attachments found in the electronic version of the manuals.
- The Release Notice is available only on the Customer Support site.

Note:

Customers may print a reasonable number of each manual for their own use.

Documentation is updated when significant changes are made that affect system operation. Updates resulting from Severity 1 and 2 PRs are made to existing manuals. Other changes are included in the documentation for the next scheduled release. Updates are made by re-issuing an electronic file to the customer support site. Customers with printed documentation should contact their Sales Representative for an addendum. Occasionally, changes are communicated first with a Documentation Bulletin to provide customers with an advanced notice of the issue until officially released in the documentation. Documentation Bulletins are posted on the Customer Support site and can be viewed per product and release.

Locate Product Documentation on the Customer Support Site

Access to Tekelec's Customer Support site is restricted to current Tekelec customers only. This section describes how to log into the Tekelec Customer Support site and locate a document. Viewing the document requires Adobe Acrobat Reader, which can be downloaded at www.adobe.com.

1. Log into the Tekelec **new** Customer Support site at support.tekelec.com.

Note: If you have not registered for this new site, click the **Register Here** link. Have your customer number available. The response time for registration requests is 24 to 48 hours.

2. Click the **Product Support** tab.
3. Use the Search field to locate a document by its part number, release number, document name, or document type. The Search field accepts both full and partial entries.
4. Click a subject folder to browse through a list of related files.
5. To download a file to your location, right-click the file name and select **Save Target As**.

Chapter 2

Feature Description

Topics:

- [Introduction Page 10](#)
- [MPS/EPAP Platform Page 12](#)
- [IGM Protocol Page 25](#)
- [General Numbering Requirements Page 41](#)
- [Maintenance Page 42](#)

This chapter describes the IS41 GSM Migration (IGM) feature.

Introduction

The IS41 GSM Migration (IGM) feature supports call termination for customers to migrate from IS-41 to GSM and GSM to IS-41 wireless technology. This is referred to as Portability Type = 5 (PT = 5). This feature provides the mobile wireless service provider a way to migrate subscribers from IS-41 to GSM and GSM to IS-41. Once the subscriber is marked as migrated, the GSM handset is fully functional, and the migrated subscriber has the option whether to continue to receive calls on the IS-41 or GSM handset.

The IGM is based on the EAGLE 5 ISS platform. It is deployed in a node that is also performing the STP function.

IGM provides the ability for subscribers to change service providers while retaining their Mobile Dialed Number (MDN). IGM uses EPAP provisioning database (also used by G-Port, INP, EIR, G-Flex, and the A-Port features) to maintain subscriber portability/migration information. Subscriber information in the EPAP provisioning database is keyed by Mobile MDNs for ANSI-41 subscribers and Mobile Station International ISDN Number (MSISDNs) for GSM subscribers.

Note: IGM treats only those DN entries assigned with SP/PT= 5, No NE/PT=5, or assigned with RN/PT= 0 as migrated subscribers. Any other types of NE/PT assignments are not considered as migrated or ported subscribers.

Two types of subscriber entries, migrated and non-migrated subscribers are supported. For migrated subscribers, the subscriber entries are entered with No NE/PT=5, SP/PT=5, and RN/PT=0. All other entries are non-migrated subscribers. Migration also supports DN block entries.

The ETSI standards are defined so that GSM carriers can choose to implement either Signaling Relay Function (SRF)-based (using MAP protocol) MNP or IN-based (using INAP protocol) MNP. Migration supports only the SRF-based solution for MNP. (INAP-based MNP processing is similar to wireline networks; this function is supported by the INP feature.)

Message Interception

SRF-based MNP processing involves the “intercepting” of existing MAP messages to check for ported numbers. For call-related messages, IGM acts as a “NP HLR” in the case where the number has been exported, by responding to the switch with a SRI, SRI-SM, LOCREQ, and SMSREQ ack messages. For non-migrated calls, IGM performs message relay.

Routing Options

The ETSI standards for SRF-based MNP define two routing options, direct routing and indirect routing. IGM supports both options:

- With direct routing, the network where the call is originated is responsible for determining whether the called party has ported and routing the call to the new subscription network.
- With indirect routing, this is the responsibility of the network that originally owned the number.

Number Lengths

Number lengths vary between countries and may even vary within a country. As a result, the Migration Database structure supports numbers of varying length in a flexible way without

necessitating software modifications. A maximum number length of 15 digits for ported numbers is supported.

Supported Messages

IGM utilizes the EPAP database to derive the portability status of a subscriber. This feature supports LOCREQ messages as well as SMSREQ messages (if the option is selected) for number portability handling. LOCREQ messages generate a LOCREQ response if the mobile dialed number (MDN) is migrated and relays the LOCREQ if the MDN is not ported (non-porting or porting are handled the same way). SMSREQ messages generate a SMSREQ NAK if access is denied and relays the SMSREQ if SMSREQ BYPASS is set to false. SRI generates an ACK if the MSISDN is migrated, and relays the message if the dialed number is not migrated. SRI-SM generates an ACK if the dialed number is migrated, and relays the message if it is not.

MTP Msgs for SCCP Apps

If the MTP Msgs for SCCP Apps feature is turned on, all MTP-routed UDT and non-segmented XUDDT SCCP messages are routed to TSM cards running the SCCP application. The TSM card then performs SCCP decode/verification on MTP-routed messages. If the MTP-routed messages have CDPA GTI = 0, and the IGM feature is turned on, then the message is sent for IGM processing. If the MTP-routed messages have CDPA GTI ≠ 0, then SRVSEL lookup is performed using the SCCP CDPA information. If the result of the lookup is MNP service, the MTP routed messages are sent for MNP handling. MNP begins IGM general TCAP/MAP verification if the message is ANSI TCAP and IGM feature is turned on.

MNP Circular Route Prevention

The MNP Circular Route Prevention (MNP CRP) feature is an extension of the IGM feature which helps in cases of circular routing caused by incorrect information in one or more of the network number portability databases. For example, a subscriber may have ported from network A to network B. Network A has the correct routing information, indicating the subscriber now belongs to network B. However, network B may have incorrect routing information, indicating that the subscriber still belongs to network A. In this case, network A routes the call to network B, based on its portability data, but network B routes the call back to network A, based on its incorrect data. This results in a circular route. The MNP CRP feature provides the logic to prevent this scenario. This feature is enabled and turned-on using Feature Access Key (FAK) commands.

DigitAction Expansion

The DigitAction Expansion feature provides more flexibility to formulate the SCCP Called Party Address (SCCP) Global Title Address (GTA) field of the MAP messages relayed by IGM.

DigitAction Expansion is provisioned via the PDBI Enter Network Entity or Update Network Entity commands. DigitAction Expansion can also be modified via the Add an NE and Update an NE GUI screens.

MNP SCCP Service Re-Route

The MNP SCCP Service Re-Route feature is used when the IGM subscriber database is incoherent with MPS data and the GTT data is valid. The MNP SCCP Service Re-Route feature provides the capability to re-route the traffic from the EAGLE 5 ISS to other IGM subscriber database nodes and inform the originating nodes to re-route the IGM service related traffic to other IGM service nodes.

The MNP SCCP Service Re-Route feature is designed to handle and control re-routing of IGM traffic from an affected node to alternate nodes within an operators network. This feature is an optional feature and doesn't affect the normal IGM function. This feature also provides the option to mark IGM OFFLINE to perform a controlled re-routing during this state.

IS412GSM Migration Changes

For systems that are upgraded to the IGM feature, the upgrade process sets an SCCP option to on if the G-Port feature is turned on and the IS412GSM prefix is defined. If the G-Port feature is turned on and the IS412GSM prefix is not defined, the upgrade process sets the SCCP option to off. The default setting for new systems is off (disabled).

The EAGLE 5 ISS populates a new GSM2IS41 prefix following the same mechanism that is used for the existing IS412GSM prefix. The EAGLE 5 ISS returns a GSM2IS41 prefix in the SRI_ACK message if a received SRI message is destined for a non-migrated IS41 or GSM migrated IS41 subscriber (a data entry is found with RN and PT=0).

MPS/EPAP Platform


Tekelec provides the MPS (Multi-Purpose Server) platform as a subsystem of the EAGLE 5 ISS. The MPS provides support for the AINPQ, A-Port, EIR, G-Flex, G-Port, IGM, and INP features.

The MPS is composed of hardware and software components that interact to create a secure and reliable platform. (For details about the MPS hardware, refer to the *Tekelec 1000 Application Server Hardware Manual*.) The MPS provides the means of interfacing the customer provisioning application with the EAGLE 5 ISS. It connects the customer with the EAGLE 5 ISS and accepts the customer number portability data, while accommodating numbers of varying lengths.

The EAGLE Provisioning Application Processor (EPAP) is software that runs on the MPS hardware platform. It collects and organizes customer provisioning data, and forwards it to the EAGLE 5 ISS Service Module cards. [Figure 1: MPS/EPAP Platform Architecture](#) on page 12 shows the overall system architecture, providing a graphic overview of MPS/EPAP platform from customer provisioning through the MPS subsystem to the EAGLE 5 ISS Service Module card databases.

Note: In this Manual, Service Module Card refers to either a DSM card or an E5-SM4G card unless a specific card is required. For more information about the supported cards, refer to the *EAGLE 5 ISS Hardware Manual*.

Figure 1: MPS/EPAP Platform Architecture

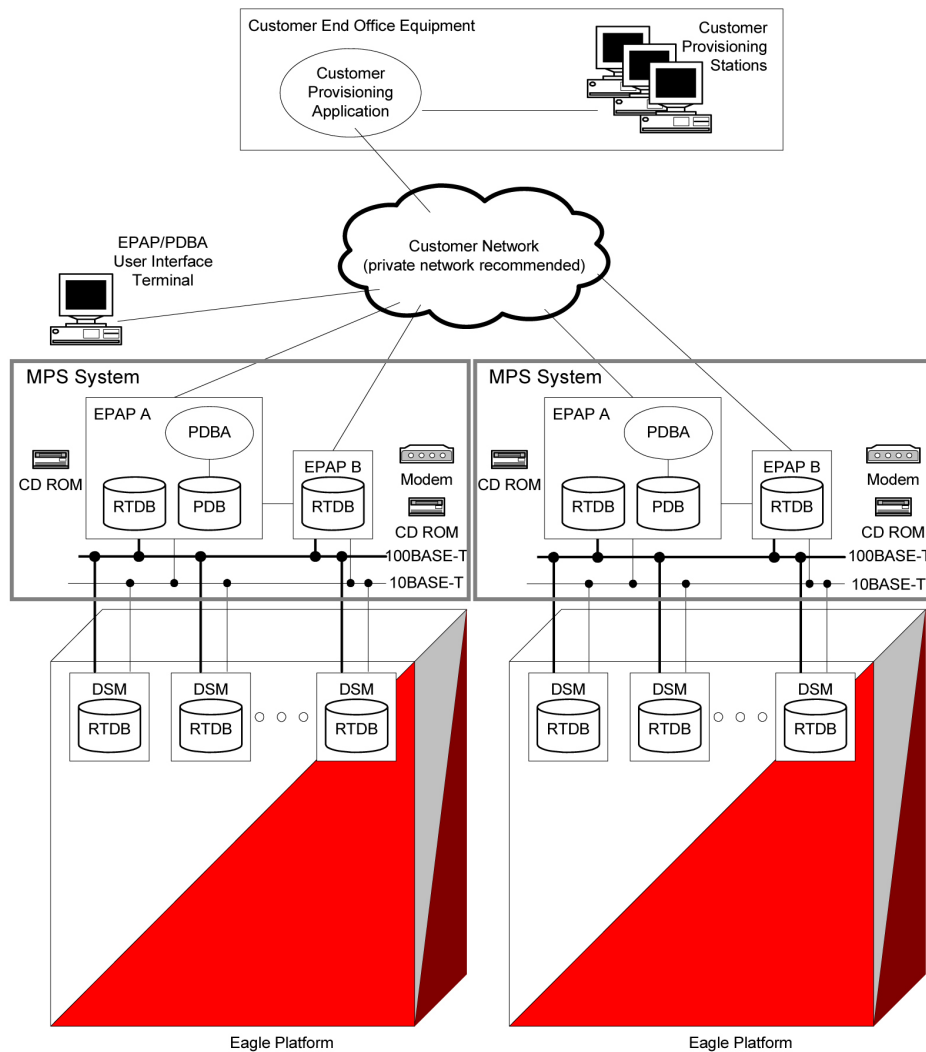

Design Overview and System Layout

Figure 1: MPS/EPAP Platform Architecture on page 12 illustrates the overall system architecture and identifies the different tasks, databases and interfaces involved. The system consists of two mated MPS servers. Each MPS contains two EPAP platforms, EPAP A and EPAP B, each containing a RealTime Database (RTDB), a Provisioning Database (PDB), servers, optical media, modems, and network hubs. Each MPS and its EPAPs may be thought of as an ‘EPAP system’; the EPAP system and the mated EAGLE 5 ISS is referred to as the ‘mated EPAP system’. Each EPAP system is a T1000 AS system with a total of four Ethernet interfaces: one from each EPAP to the 100Base-T Ethernet and one from each EPAP to the 10Base-T Ethernet.

On the EAGLE 5 ISS platform side, a set of Service Module cards, which hold the RTDB database, is part of the STP. Two high-speed Ethernet links connect the Service Module cards and the EPAPs. One of the links is a 100BASE-T Ethernet bus, and the other is a 10BASE-T Ethernet bus.

The RTDB database is provisioned and maintained through the EPAPs. EPAP A and EPAP B act as the active EPAP and the standby EPAP. One link serves as the active link, and the other as the

standby link. At any given time, there is only one active EPAP and one active link. The database is provisioned through the active link by the active EPAP; the other EPAP provides redundancy.

In case of failure of the active EPAP, the standby EPAP takes over the role of active EPAP and continues to provision the subscriber database. In the case where the active link fails, the active EPAP switches to the standby link to continue provisioning the Service Module cards. The two Ethernet links are part of the DSM network.

Another 100BASE-T Ethernet link exists between the EPAPs; that link is called the EPAP sync network.

The major modules on the EPAP are:

- Service Module card provisioning module
- Maintenance module
- RTDB module
- PDB module

The Service Module card provisioning module is responsible for updating subscriber databases on the EAGLE 5 ISS Service Module cards using the Reliable Multicast Transport Protocol (RMTP) multicast. The maintenance module is responsible for the proper functioning of the EPAP platform. The PDB module is responsible for preparing and maintaining the Real Time Database, which is the “golden copy” of the subscriber database. The PDB module can run on one of the EPAPs of either of the mated EAGLE 5 ISSs.

Functional Overview

The main function of the MPS / EPAP platform is to provision the data from the customer network to the Service Module cards on the EAGLE 5 ISS. Subscriber database records are continuously updated from the customer network to the PDB. The PDB module communicates with the maintenance module and the RTDB task over a TCP/IP connection to provision the Service Module cards on the EAGLE 5 ISS. The maintenance module is responsible for the overall stability and performance of the system.

It is possible for the current copy of the RTDB database on the Service Module cards to get out-of-sync due to missed provisioning or card rebooting. Therefore, the RTDB on the EPAP contains a coherent, current copy of the subscriber database. The EPAP-Service Module card provisioning task sends database information out on the provisioning link. The Service Module cards act as the receivers and are reprovisioned.

EPAP/PDBA Overview

The EAGLE Provisioning Application Processor (EPAP) platform and the Provisioning Database Application (PDBA), coupled with the Provisioning Database Interface (PDBI) facilitate the user database required for EAGLE 5 ISS EPAP-based features. The following functions are supported:

- Accept and store subscription data provisioned by the customer
- Update and reload subscriber databases on the Service Module cards

The PDBA operates on the master Provisioning Database (PDB). The EPAP and PDBA are both installed on the MPS hardware platform.

The EPAP platform performs the following:

- Maintains an exact copy of the real time database (RTDB) on the EPAP
- Distributes the subscription database to the Service Module cards
- Maintains a redundant copy of the RTDB database

The EPAP platform is a mated pair of processors (the upper processor, called EPAP A, and the lower processor, EPAP B) contained in one frame.

During normal operation, information flows through the EPAP/PDBA software with no intervention. Subscription data is generated at one or more operations centers and is delivered to the PDBA through a TCP socket interface (PDBI). The PDBA software stores and replicates data on EPAP A on the mated EPAP system. The data is then transmitted by the EPAPs across a private network to the Service Module cards located in the EAGLE 5 ISS frame.

The primary interface to the PDBA consists of machine-to-machine messages. The interface is defined by Tekelec and is described in the Provisioning Database Interface Manual. Provisioning software compatible with the EPAP socket interface can be created or updated using the interface described in that manual.

Additionally, a direct user interface is provided on each EPAP to allow for configuration, maintenance, debugging, and platform operations. A direct user interface is also provided by the PDBA for configuration and database maintenance.

The MPS/EPAP is an open-systems platform and easily accommodates the required high provisioning rates. Compared to the traditional OAM platform, the persistent database and provisioning in an open systems platform provides these benefits:

- Variety of hardware components and vendors
- Availability of third party communication and database tools
- Standard communication protocols
- Availability of personnel with related experience

Each EPAP server maintains a copy of the Real Time Database (RTDB) in order to provision the EAGLE 5 ISS Service Module cards. The EPAP server must comply with the hardware requirements in the *MPS Hardware Manual*. [Figure 1: MPS/EPAP Platform Architecture](#) on page 12 illustrates the EPAP architecture contained in the MPS subsystem.


Each EPAP has a dedicated optical media drive. One EPAP per EAGLE 5 ISS platform has a modem capable of supporting remote diagnostics, configuration, and maintenance. These remote operations are performed through EPAP login sessions and are accessible across the customer network as well as through a direct terminal connection to the EPAP using an RS232 connection. Refer to the *Tekelec T1000 Application Server Hardware Manual* for details about the hardware devices and network connections.

Subscriber Data Provisioning

[Figure 2: Subscriber Data Provisioning Architecture \(High Level\)](#) on page 16 shows the current high-level view of the subscriber data provisioning architecture. Only those parts of the EAGLE 5 ISS platform that are relevant to subscriber data provisioning are shown. This section defines requirements for the Provisioning Database Interface (PDBI) between the EPAP and the operator's provisioning system (OPS). Provisioning clients connect to the EPAPs via the PDBI. This interface contains commands that allow all of the provisioning and retrieving of subscription data. The

PDBI is used for real-time provisioning of subscriber and network entity data only. Refer to the *Provisioning Database Interface Manual* for more details.

Figure 2: Subscriber Data Provisioning Architecture (High Level)

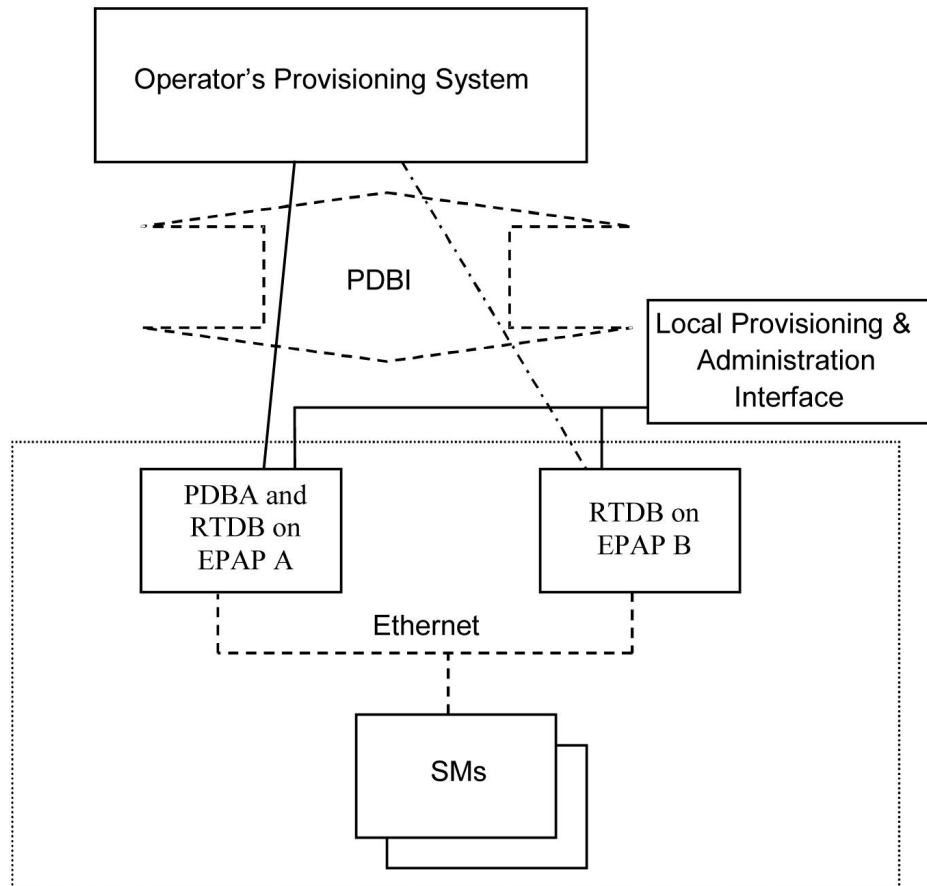

A pair of active/standby EPAP servers provides the interface between the Real Time Database (RTDB) of the EAGLE 5 ISS Service Module cards and the OPS. EPAP A is equipped with both the PDB (Provisioning Database) and the RTDB, and EPAP B has just the RTDB. An EPAP with just the RTDB must be updated by the EPAP that has the PDB.

For more information about the EPAP, refer to the *EPAP Administration Manual*. For more information about the MPS hardware, refer to the *Tekelec 1000 Application Server Hardware Manual*.

Distributed Administrative Architecture

This section describes, at a high level, the distributed administrative architecture for the EAGLE 5 ISS, including the EPAP.

Databases requiring high update and retrieval rates, such as the EPAP RTDB, are populated using redundant Ethernet connections to Service Module cards from an EPAP MPS platform.

An EPAP consists of a combined Provisioning (MySQL) and Real Time Database (RTDB). The Provisioning Database (PDB) responds to requests for updates by the active and standby RTDBs on both mated EAGLE 5 ISSs. The active EPAP RTDB is responsible for initiating multi-cast updates of changed database records to the Service Module cards after the data has been committed to the

EPAP disks. Furthermore, the PDB may accept and commit more database updates while the RTDBs are completing their previous updates.

It is this overlapping of database updates, coupled with an RTDB transactional database engine and fast download time, that allows larger amounts of data at a time to be transferred from the PDB. Committing larger amounts of data at a time to the RTDB (versus a single update at a time) allows faster overall transaction rates to be achieved. The boundaries of the transaction rates become more closely related to cache size and disk cache flush time than the disk access time of a single update. Thus, successful completion of EPAP database updates only guarantees that the PDB has been updated, but it does *not* mean the RTDB has completed the update and sent the new subscription data to the Service Module card.

The EPAP architecture contains a local provisioning terminal and a modem for remote access, as well as other functions. A backup device can be used to back up or restore the provisioning database. The local provisioning terminal is used to manually repair the standby EPAP RTDB or to turn the subscriber database audit on or off. For additional information, refer to the *Tekelec T1000 Application Server Hardware Manual* and *EPAP Administration Manual*.

EPAP (EAGLE Provisioning Application Processor)

As shown in [Figure 1: MPS/EPAP Platform Architecture](#) on page 12, a single MPS system contains two EPAP (EAGLE Provisioning Application Processor) servers. At any given time, only one actively communicates with the Service Module cards. The other EPAP server is in standby mode. In addition, two MPS systems can be deployed in a mated-pair configuration.

The primary purpose of the EPAP systems is to maintain the RTDB and PDB and to download copies of the RTDB to the Service Module cards on the EAGLE 5 ISS.


The PDB on the active EPAP receives subscription data from the customer network through the PDBI, the external source of provisioning information. The PDBA continually updates the active EPAP's PDB. The PDB uses MySQL database software. Once an update is applied to the active PDB, it is sent to the RTDBs on the active and standby EPAPs.

Both the active and standby EPAPs maintain copies of the RTDB. Periodically, the Service Module card polls the active EPAP RTDB for any new updates. The active EPAP downloads the updates to the Service Module for its own resident copy of the RTDB.

In a mated-pair configuration, there are two mated MPS Systems, as shown in [Figure 1: MPS/EPAP Platform Architecture](#) on page 12. The PDB on the active EPAP automatically updates the PDB on the mate platform. The PDB on the mate platform then updates its EPAP RTDBs, which in turn update the RTDBs on the associated Service Module cards.

Provisioning of the EAGLE 5 ISS's Service Module cards is performed through two interfaces, using two different sets of commands. Provisioning is accomplished by the STP updates from EAGLE 5 ISS terminals and by updates from the customer's external provisioning system. This system of dual provisioning is illustrated in [Figure 3: Database Administrative Architecture](#) on page 17.

Figure 3: Database Administrative Architecture

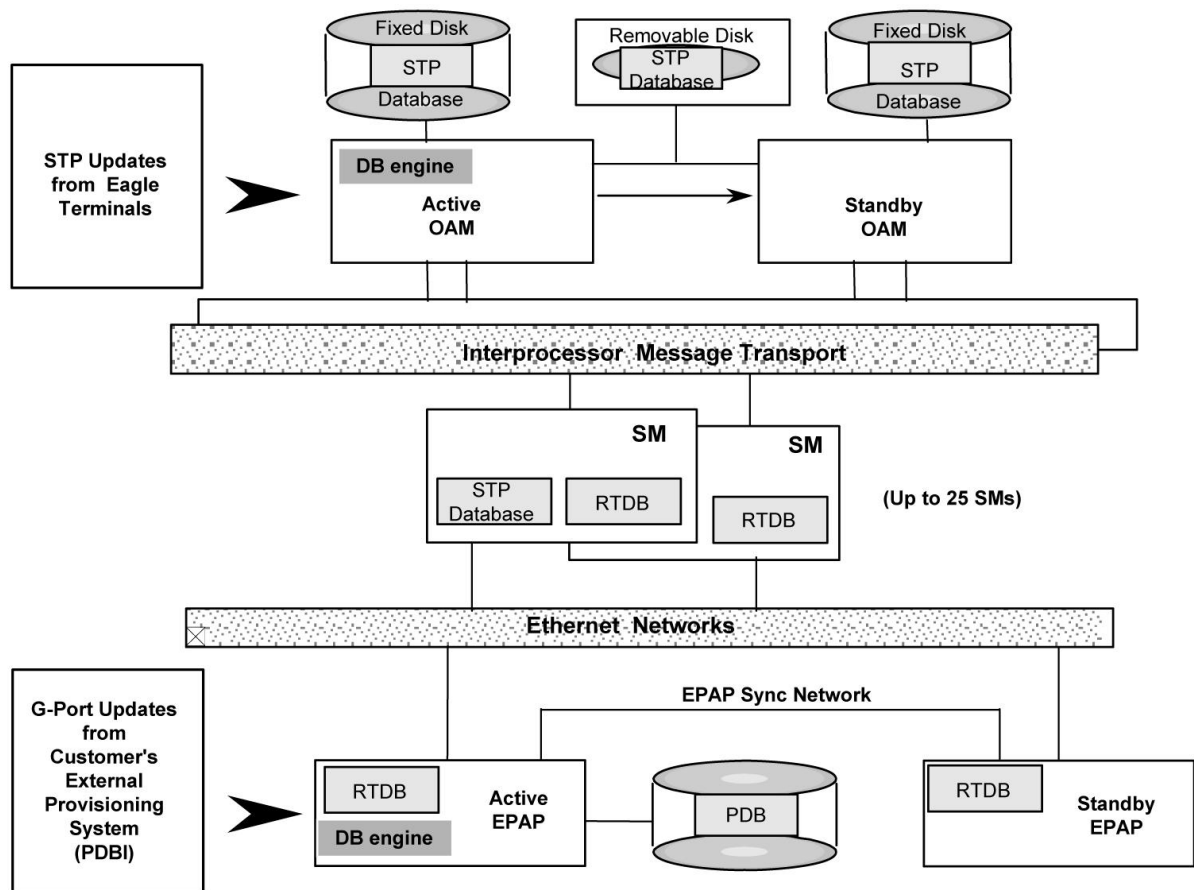

Service Module Cards

From 1 to 25 Service Module cards can be provisioned with the IGM feature enabled. The IGM feature requires that all Service Module cards contain 4 GB of memory. [Figure 3: Database Administrative Architecture](#) on page 17 illustrates each Service Module card having two Ethernet links, the main Service Module network on the 100BASE-T link and the backup Service Module network on the 10BASE-T link.

The extra memory holds a copy of the RTDB. The Service Module Ethernet ports are linked to the EPAP systems to receive the downloaded RTDBs. The Service Module cards run a version of the SCCP software application that has been ported to the VxWorks operating system. To differentiate the Service Module-VxWorks-SCCP application from the SCCP that runs on Translation Services Module (TSM) cards, the Service Module version is named 'VSCCP'.

Multiple Service Module cards provide a means of load balancing in high-traffic situations. The Service Module card database is in a format that facilitates rapid lookups. Each Service Module card contains an identical database. Furthermore, all Service Module IGM subscriber databases are identical to the RTDB maintained by the EPAPs.

However, the various databases may not be identical at all times for several reasons. First of all, when a Service Module card is initialized, it downloads the current copy of the database from the EPAP. While that card is being loaded, it cannot receive new updates that have arrived at the EPAP since reload began. Another condition that can result in databases being out-of-sync occurs when the EPAP receives updates from its provisioning source, but it has not yet sent them down

to the Service Module cards. Updates are applied to the Provisioning Database (PDB) as they are received.

Two possible scenarios contribute to a condition where a Service Module card may not have enough memory to hold the entire database. In the first case, the database is downloaded successfully to the Service Module card, but subsequent updates eventually increase the size of the database beyond the capacity of the Service Module card memory. In this situation, it is desirable to continue processing IGM transactions, even though the database may not be as up-to-date as it could be.

The other case occurs when a Service Module card is booted. If it is determined then that the card does not have enough memory for the entire database, the database is not loaded on that card. Each Service Module card is responsible for recognizing and reporting its out-of-memory conditions by means of alarms.

Overview of EPAP to Service Module Card Communications

Before discussing Service Module card status reporting or EPAP status reporting, it is helpful to understand the communications between the Service Module cards and the EPAP in broad terms.

- UDP - sending Service Module card status messages

The Service Module cards and EPAPs create a UDP (User Datagram Protocol) socket which is used for status messages. One of the last things a Service Module card does when it is initialized is to send a status message to the EPAP, containing the Service Module ID, database level, and memory size. The EPAP maintains tables containing the last known status of each Service Module card. EPAP uses these to determine whether or not the Service Module card needs to download the database.

- IP - reporting EPAP maintenance data

The Service Module cards create a TCP socket when they are initialized, and listen for connection requests. During initialization or after a loss of connectivity, the active EPAP chooses one of the Service Module cards and issues a *Connect* to establish the TCP/IP connection with that Service Module card (referred to as the primary Service Module). The purpose of this link is to provide a path for reporting EPAP alarms and to forward maintenance blocks to the Service Module card.

- IP Multicast - downloading GSM database

Because of the large size of the database and the need to download it quickly on up to 25 Service Module cards, IGM uses a technique known as IP multicasting. This technique is based on Reliable Multicast Transport Protocol-II (RMTP-II), a product of Globalcast Communications. IP multicasting downloads the RTDB and database updates to all of the Service Module cards simultaneously.

The administration of IP multicasting is based on the concept of a “tree”, or stream of data, which is constantly being broadcast by the EPAP. Service Module cards that need to download the real time database or to receive database updates “join the tree”. Service Module cards can also “leave the tree”, typically when the database fills their available memory.

Service Module Card Provisioning and Reload

One of the core functions of the EPAP is to provision the Service Module cards with the Real Time Database (RTDB) updates. In order to provide redundancy for this feature, separate RMTP channels are created on each interface from each EPAP:

- EPAP A, Link A (on the main DSM network, 100BASE-T)
- EPAP A, Link B (on the backup DSM network, 10BASE-T)
- EPAP B, Link A (on the main DSM network, 100BASE-T)
- EPAP B, Link B (on the backup DSM network, 10BASE-T)

Provisioning and other data is broadcast on one of these channels to all of the Service Module cards. Provisioning is done by database level in order to leave tables coherent between updates.

The Service Module cards do the following:

- Detect the need for incremental updates and send a status message to the EPAP.
- Discriminate between the various streams according to the database level contained in each message and accept updates based on the Service Module card database level.

Service Module Card Reload Model

Service Module cards may require a complete database reload in the event of reboot or loss of connectivity for a significant amount of time. The EPAP provides a mechanism to quickly load a number of Service Module cards with the current database. The database on the EPAP is large and may be updated constantly. The database sent to the Service Module card or cards will likely be missing some of these updates making it corrupt, in addition to being "back level."

EPAP Continuous Reload

It is important to understand how the EPAP handles reloading of multiple Service Module cards from different starting points. Reload begins when the first Service Module card requires it. Records are read sequentially from the Real Time Database (RTDB) from an arbitrary starting point, wrapping back to the beginning. If another Service Module card requires reloading at this time, it uses the existing record stream and notifies the Service Module card provisioning task of the first record it read. This continues until all Service Module cards are satisfied.

Service Module Card Database Levels and Reloading

The current database level when the reload started is of special importance during reload. When a Service Module card detects that the last record has been received, it sends a status message back to the EPAP indicating the database level at the start of reload. This action starts incremental loading. The Service Module card continues to reload until it is completely caught up with the current level of the RTDB. As database records are sent to the Service Module cards during reload, normal provisioning can *change* those records. All records changed between the start and end of reloading must be incrementally loaded before the database is coherent and usable by the Service Module card.

The following terminology is used here for the stages of database reload for a given Service Module card.

- **Stage 1 loading:** The database is being copied record for record from the golden RTDB in the EPAP to the Service Module card RTDB. The database is incoherent during stage 1 loading.
- **Incremental update:** The database is receiving all of the updates missed during stage 1 loading or some other reason (e.g., network outage, processor limitation, lost communication, etc.). The database is coherent, but back-level during incremental update.
- **Current:** The database is receiving current updates from the Service Module card provisioning task.

- **Coherent:** The database is at a whole database level, that is, not currently updating records belonging to a database level.

EPAP Status and Error Reporting via Maintenance Blocks

The EPAPs forward all status and error messages to the Service Module cards in maintenance blocks. Maintenance blocks are asynchronously sent whenever the EPAP has something to report. The maintenance blocks eventually update EPAP Device Control Blocks (DCBs) located on the EAGLE 5 ISS. The DCBs provide the status information that is received when a `rept-stat-mps` command is issued.

Network Connections

Several customer and Tekelec-installed private networks are *required* to support the provisioning of subscription data. These networks are:

- [Customer Provisioning Network](#) on page 21
- [EPAP Sync Network](#) on page 22
- [DSM Networks](#) on page 23
- [Dial-Up PPP Network](#) on page 24

The following discussion is an overview of these private networks. It expands on the networks in the architecture diagram shown in [Figure 4: Customer Provisioning Network](#) on page 21. (For details about configuring these networks, refer to the *EPAP Administration Manual*.)


Customer Provisioning Network

The customer network carries the following traffic:

- Customer queries and responses to the PDB via the PDBI from the customer provisioning network
- Updates between PDBs of a mated EAGLE 5 ISS pair
- Updates between a PDB on one EAGLE 5 ISS and RTDBs on a mated EAGLE 5 ISS
- PDBA import/export (file transfer) traffic
- Traffic from a PDBA reloading from its mate
- EPAP and PDBA user interface traffic.

A typical customer network is shown in [Figure 4: Customer Provisioning Network](#) on page 21.

Figure 4: Customer Provisioning Network

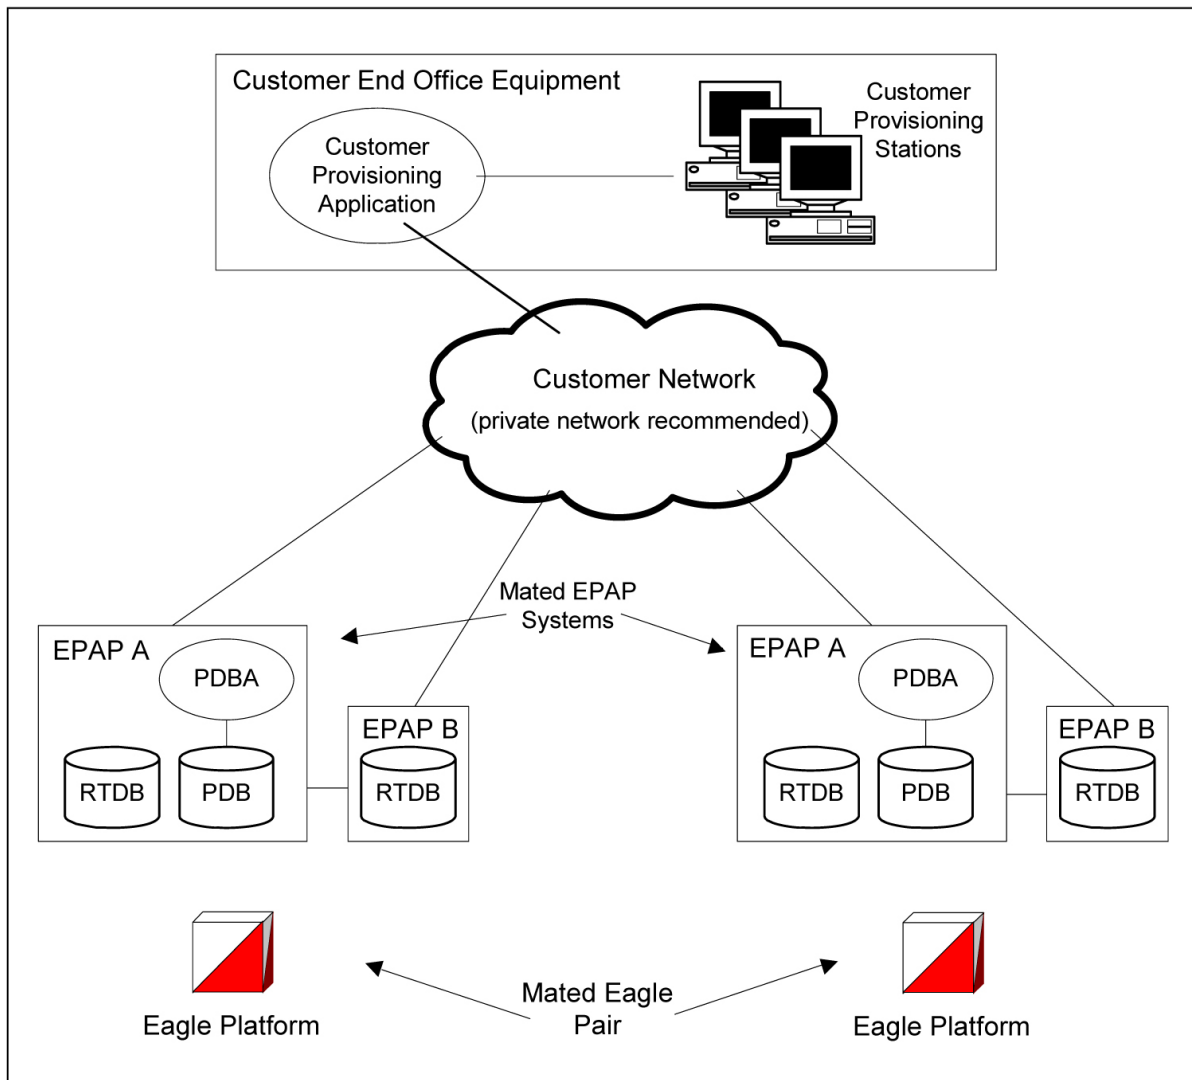


Although a dedicated network is recommended, it is possible that unrelated customer traffic can use the network as well. The determination, either to have a dedicated network or to allow other customer traffic, should be based on available external Ethernet bandwidth and network performance considerations.

EPAP Sync Network

The EPAP sync network carries RTDB and maintenance application traffic between active and standby EPAP servers on an MPS system. It synchronizes the contents of the RTDBs of both EPAP A and B. The EPAP Sync network is a single Ethernet connection between EPAP A and EPAP B running at 100BASE-T, as shown in [Figure 5: EPAP Sync Network](#) on page 22.

Figure 5: EPAP Sync Network

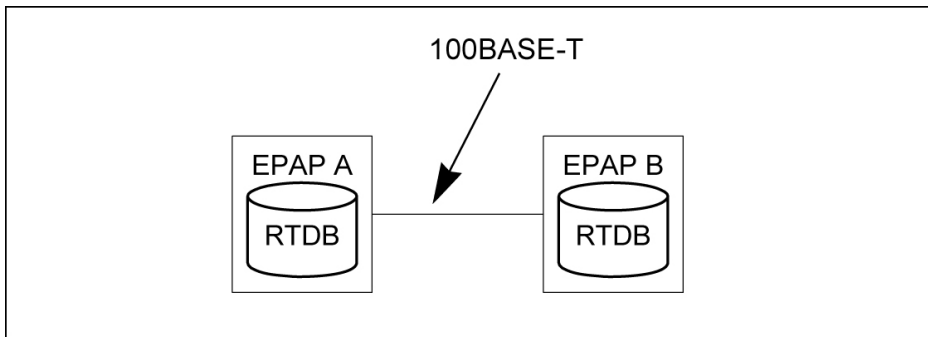


DSM Networks

The DSM networks are shown in [Figure 6: DSM Networks](#) on page 23. They carry provisioning data from the active EPAP RTDB to the Service Module cards. They also carry reload and maintenance traffic to the Service Module cards.

The DSM networks consist of two Ethernet networks: the main DSM network running at 100BASE-T, and the backup DSM network running at 10BASE-T. Both Ethernet networks connect EPAP A and EPAP B with every Service Module card on a single EAGLE 5 ISS platform.

Figure 6: DSM Networks

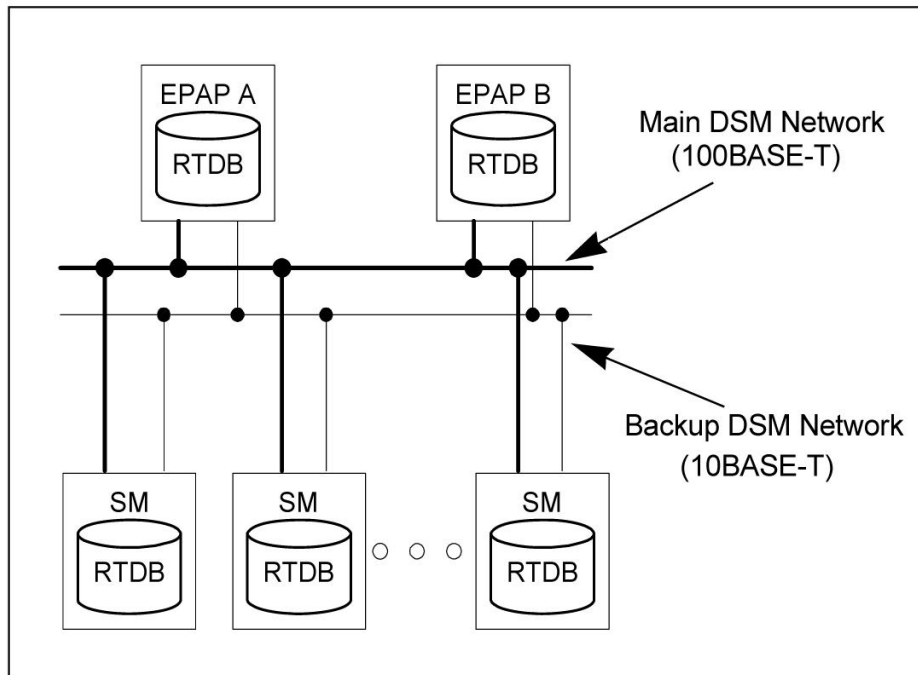

Maintenance information is sent from the active EPAP to an arbitrarily selected Service Module card. The selected Service Module card is known as the primary Service Module card. Static information is exchanged across this interface at initialization, and dynamic information is exchanged on occasion.

While much of the traditional OAM provisioning and database functionality is implemented on the EPAP, the maintenance reporting mechanism is still the OAM.

The first and second octets of the EPAP network addresses for this network are 192.168. (The first two octets for private class C networks are defined in RFC 1918.)

The third octet is customer specifiable for each DSM network. It is important to select values that do not interfere with the customer's network addressing scheme.

The fourth octet of the address is specified as follows:

- If the EPAP is configured as "EPAP A", the fourth octet has a value of 100.
- If the EPAP is configured as "EPAP B", the fourth octet has a value of 200.

[Table 2: EPAP IP Addresses in the DSM Network](#) on page 24 summarizes the contents of each octet.


Table 2: EPAP IP Addresses in the DSM Network

Octet	Value
1	'192'
2	'168'
3	One customer-provisioned value for DSM network A, and another for DSM network B
4	'100' for EPAP A '200' for EPAP B

Dial-Up PPP Network

The dial-up PPP network allows multiple user-interface sessions to be established with the EPAP. The network connects a remote EPAP/PDBA user interface terminal with the EPAP in the EAGLE 5 ISS's MPS subsystem. The dial-up PPP network is illustrated in [Figure 7: Dial-Up PPP Network](#) on page 24.

Figure 7: Dial-Up PPP Network

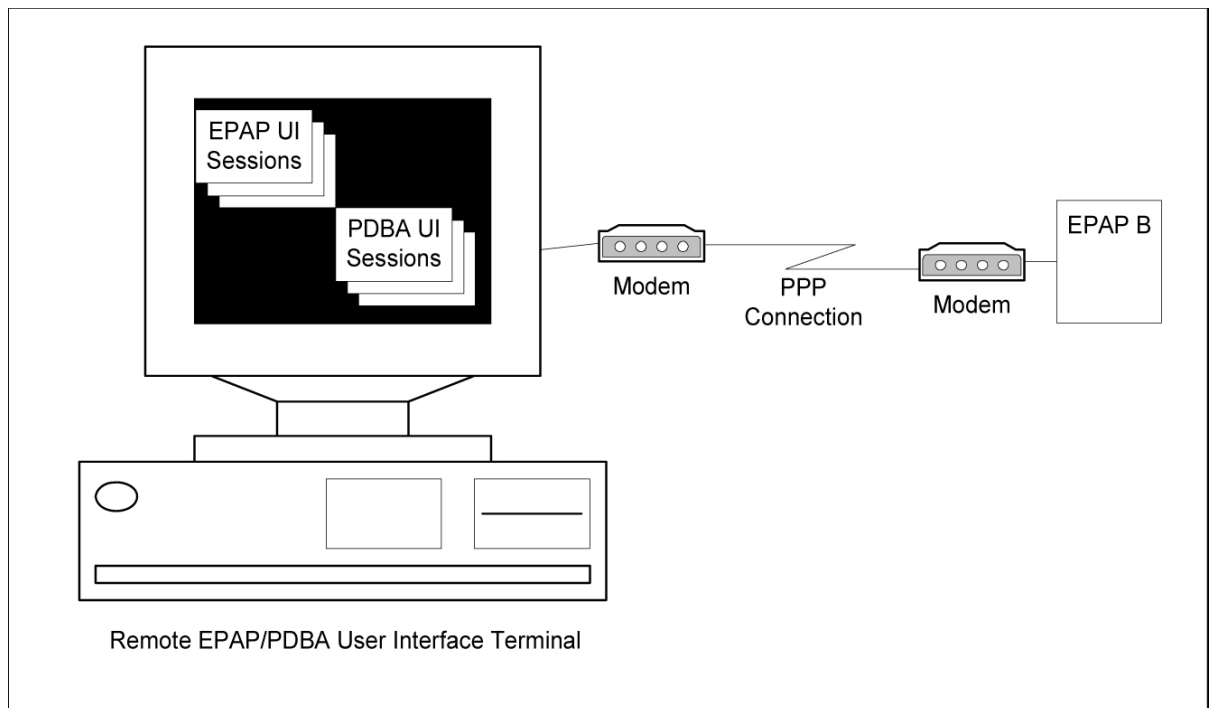

IGM Protocol

IGM provides the following main functions:

Message Discrimination

Because IGM provides translation of migrated and non-migrated numbers, it provides a method to identify which messages need migration handling versus GTT. This task of identification is provided via a service selector table where the user defines the service for a combination of selectors.

Operation Code Discrimination

IGM handles ANSI Loc_Req, SMSREQ, GSM SRI, and SRI_SM differently than other ANSI/GSM operation codes. The Portability type field is only considered for these operation codes. Message relay is performed for all other operation codes based on IGM Translation data.

Number Conditioning

The RTDB stores International MSISDN only. IGM provides the capability to condition incoming numbers to be international MSISDN (Insert CC or/and NDC) for the database look up. IGM removes the GSM prefix from GSM SRI messages and then conditions the non-international numbers to international numbers, if needed, before performing any database lookup.

IS412GSM

IGM generates a Loc_Req Return Result Response, when the MDN in the Loc_Req is a "Migrated with one handset" subscriber. When formulating a Loc_Req response, IGM uses the IS412GSM prefix in GSMOPTS to build the Routing Digits. If the IS412GSM prefix is not provisioned, IGM issues UIM 1130 "LOCREQ rcvd - IS412GSM not provisioned" and falls through to GTT.

GSM2IS41

The GSM2IS41 prefix is used in the SRI-ack if the message received is SRI and DN lookup has RN and PT = 0 assigned. If MIGRPFX = MULTIPLE then the RN from the RTDB is used as the prefix in the SRI ack message. If MIGRPFX = SINGLE and GSM2IS41 prefix is NONE, then the SRI ack message issues UIM 1341 "SRI rcvd GSM2is41 prefix not provisioned" and the message falls through to GTT.

Database Lookup

IGM performs the RTDB database lookup using the international MSISDN.

The individual number database is searched first:

- If the number is not found, the number range database is searched.
- If a match is not found in the individual and range-based database, the GTT is performed on the message.

In the event of the MSISDN numbers in the RTDB database being odd and CDPA GTI of the incoming message being '2', and the last digit of the number is 'zero':

- IGM first performs database lookup one time using the even number.
- If no match is found, IGM again performs the database lookup, using the odd number (without last digit).

Since a DN may be the target of the A-Port, G-Port, or IGM message processing in a hybrid network (where an operator owns both GSM and IS41 network), message processing call disposition is based on what applications are in service. [Table 3: IGM Customer Message Processing](#) on page 27 through [Table 7: IGM, A-Port, and G-Port Customer Message Processing](#) on page 31 show call dispositions for the following configurations:

- IGM Only ([Table 3: IGM Customer Message Processing](#) on page 27)
- IS41 GSM Migration Only [Table 4: IS412GSM Migration Customer Message Processing](#) on page 28
- IGM and G-Port ([Table 5: IGM and G-Port Customer Message Processing](#) on page 29)
- IGM and A-Port ([Table 6: IGM and A-Port Message Processing](#) on page 30)
- A-Port, G-Port, and IGM ([Table 7: IGM, A-Port, and G-Port Customer Message Processing](#) on page 31)

The following notations apply to [Table 3: IGM Customer Message Processing](#) on page 27 through [Table 7: IGM, A-Port, and G-Port Customer Message Processing](#) on page 31.

PT = Portability Type for the DN

Values:

- 0 – not known to be ported

- 1 – own number ported out
- 2 – foreign number ported to foreign network
- 3 – prepaid 1 (used by PPSMS)
- 4 – prepaid 2 (used by PPSMS)
- 5 – migrated with one handset

RN = Routing Number

SP = Signaling Point

NE = Network Entity

SP* : This row refers to DN is assigned with SP, with or without PT. SP** : This row refers to DN is assigned with SP without PT. DN blocks are commonly assigned with SP and without PT.

Table 3: IGM Customer Message Processing

NE/PT	SRI	SRI_SM	Other GSM	LOCREQ	SMSREQ	Other IS41
RN and PT = 0	MIGRPFX= single: ACK (use GSM2IS41 prefix) MIGRPFX= multiple: ACK (RN from EPAP)	SRI_SM_ACK with Return Error Component	Relay	Relay	Relay	Relay
RN and PT ≠ 0	GTT	GTT	GTT	GTT	GTT	GTT
SP and PT = 5	Relay	Relay	Relay	ACK (IS412GSM prefix)	smsreq (SMS Access Denied Reason = 5) GTT (if smsreqbypass = true)	Relay
SP and PT ≠ 5	Relay	Relay	Relay	Relay	Relay	Relay
No NE and PT = 0	ACK (no NE)	GTT	GTT	GTT	GTT	GTT

NE/PT	SRI	SRI_SM	Other GSM	LOCREQ	SMSREQ	Other IS41
No NE and PT=1, 2, or No PT	GTT	GTT	GTT	GTT	GTT	GTT
No NE and PT = 5	GTT	GTT	GTT	ACK (IS412GSM prefix)	smsreq (SMS Access Denied Reason = 5) GTT (if smsreqbypass = true)	GTT
No DN entry found	GTT	GTT	GTT	GTT	GTT	GTT

Table 4: IS412GSM Migration Customer Message Processing

NE/PT	SRI	SRI_SM	Other GSM	LOCREQ	SMSREQ	Other IS41
RN and PT = 0	ACK (RN from EPAP)	SRI_SM_ACK with Return Error Component	Relay	Relay	Relay	Relay
RN and PT ≠ 0	ACK (RN from EPAP)	Relay	Relay	Relay	Relay	Relay
SP and PT = 5	Relay	Relay	Relay	ACK (IS412GSM prefix)	smsreq (SMS Access Denied Reason = 5)	Relay
SP and PT ≠ 5	Relay	Relay	Relay	Relay	Relay	Relay
No NE and PT= 0, 1, 2, or No PT	ACK (no NE)	GTT	GTT	GTT	GTT	GTT

NE/PT	SRI	SRI_SM	Other GSM	LOCREQ	SMSREQ	Other IS41
No NE and PT = 5	GTT	GTT	GTT	ACK (IS412GSM prefix)	smsreq (SMS Access Denied Reason = 5)	GTT
No DN entry found	GTT	GTT	GTT	GTT	GTT	GTT

Table 5: IGM and G-Port Customer Message Processing

NE/PT	SRI	SRI_SM	Other GSM	LOCREQ	SMSREQ	Other IS41
RN and PT = 0	MIGRPFX= single: ACK (use GSM2IS41 prefix) MIGRPFX= multiple: ACK (RN from EPAP)	SRI_SM_ACK with Return Error Component	Relay	Relay	Relay	Relay
RN and PT ≠ 0	ACK (RN from EPAP)	Relay	Relay	GTT	GTT	GTT
SP and PT = 5	Relay	Relay	Relay	ACK (IS412GSM prefix)	smsreq (SMS Access Denied Reason = 5) Relay (if smsreqbypass = false)	Relay
SP and PT ≠ 5	Relay	Relay	Relay	Relay	Relay	Relay
No NE and PT = 5	GTT	GTT	GTT	ACK (IS412GSM prefix)	smsreq (SMS Access Denied Reason = 5)	GTT

NE/PT	SRI	SRI_SM	Other GSM	LOCREQ	SMSREQ	Other IS41
					GTT (if smsreqbypass = true)	
No NE and PT= 0, 1, 2, or No PT	ACK (no NE)	GTT	GTT	GTT	GTT	GTT
No DN entry found	GTT	GTT	GTT	GTT	GTT	GTT

Table 6: IGM and A-Port Message Processing

NE/PT	SRI	SRI_SM	Other GSM	LOCREQ	SMSREQ	Other IS41
RN and PT = 0	MIGRPFX= single: ACK (use GSM2IS41 prefix) MIGRPFX= multiple: ACK (RN from EPAP)	SRI_SM_ACK with Return Error Component	Relay	Relay	Relay	Relay
RN and PT≠ 0	ACK (RN from EPAP)	GTT	GTT	ACK (RN from EPAP)	Relay	Relay
SP and PT= 5	Relay)	Relay	Relay	ACK (using IS412GSM prefix)	smsreq (SMS Access Denied Reason = 5)	Relay
SP and PT≠ 5	GTT	GTT	GTT	Relay	Relay	Relay
No NE and PT= 5	GTT	GTT	GTT	ACK (using IS412GSM prefix)	smsreq (SMS Access Denied Reason = 5)	GTT

NE/PT	SRI	SRI_SM	Other GSM	LOCREQ	SMSREQ	Other IS41
					GTT (if smsreqbypass = true)	
No NE and PT= 0	ACK (no NE)	GTT	GTT	GTT	GTT	GTT
No NE and PT= 1, 2, or No PT	GTT	GTT	GTT	ACK (no NE)	GTT	GTT
No DN entry found	GTT	GTT	GTT	GTT	GTT	GTT

Table 7: IGM, A-Port, and G-Port Customer Message Processing

NE/PT	SRI	SRI_SM	Other GSM	LOCREQ	SMSREQ	Other IS41
RN and PT = 0	MIGRPFX= single: ACK (use GSM2IS41 prefix) MIGRPFX= multiple: ACK (RN from EPAP)	SRI_SM_ACK with Return Error Component	Relay	Relay	Relay	Relay
RN and PT ≠ 0	ACK (RN from EPAP)	Relay	Relay	ACK (RN from EPAP)	Relay	Relay
SP and PT = 5	Relay	Relay	Relay	ACK (IS412GSM prefix)	smsreq (SMS Access Denied Reason = 5) GTT (if smsreqbypass = true)	Relay
SP and PT ≠ 5	Relay	Relay	Relay	Relay	Relay	Relay

NE/PT	SRI	SRI_SM	Other GSM	LOCREQ	SMSREQ	Other IS41
No NE and PT = 0	ACK (no NE)	GTT	GTT	GTT	GTT	GTT
No NE and PT=1, 2, or No PT	ACK (no NE)	GTT	GTT	ACK (no NE)	GTT	GTT
No NE and PT = 5	GTT	GTT	GTT	ACK (IS412GSM prefix)	smsreq (SMS Access Denied Reason = 5) GTT (if smsreqbypass = true)	GTT
No DN entry found	GTT	GTT	GTT	GTT	GTT	GTT

Database lookup results in the following:

1. Applying normal routing or
2. Relaying the message to the destination as noted in the database or
3. Returning an acknowledge message to the originating switch.

Message Relay

The rules for formatting the SCCP CdPA GTA field are based on the value specified in the DigitAction field. In the case where a received IS41 message is relayed, the EAGLE formulates the SCCP CdPA GTA field of the outgoing message according to DigitAction specified. If DigitAction = none, the EAGLE 5 ISS does not overwrite the SCCP CdPA GTA. For all other values, the EAGLE 5 ISS formats the SCCP CdPA GTA according to the value assigned to DigitAction. [Table 8: DigitAction Applications](#) on page 32 identifies the required DigitAction options as well as the samples of how the SCCP CdPA GTA of an outgoing message is formatted for each of the options. The illustration assumes the RN/SP ID is 1404 and default country code is 886.

Table 8: DigitAction Applications

DigitAction	Value in Incoming CdPA GTA	Value in Outgoing CdPA GTA	Meaning
none	886944000213	886944000213	No change to the Called Party GTA (default)

DigitAction	Value in Incoming CdPA GTA	Value in Outgoing CdPA GTA	Meaning
prefix	886944000213	1404886944000213	Prefix Called Party GTA with the entity id
replace	886944000213	1404	Replace Called Party GTA with the entity id
insert	886944000213	8861404944000213	Insert entity id after country code. (CC + Entity Id + NDC + SN)
delccprefix	886944000213	1404944000213	Delete country code and add prefix
delcc	886944000213	944000213	Delete country code
spare1	886944000213	treated as none	No change to the Called Party GTA (default)
spare2	886944000213	treated as none	No change to the Called Party GTA (default)

Returning Acknowledgement

The following encoding rules are followed when a LOCREQ ack is returned:

1. When a ACK/Response is returned, the EAGLE5 ISS follows the LOCREQ encoding rules along with the following enhancements for added flexibility:
2. Allow users to specify which TCAP locreq parameter (a.k.a., the TCAP Outgoing Called Party parameter) shall encode the RN (and/or DN) information
3. Allow users to specify the DigitType value to encode the TCAP Outgoing Called Party parameter
4. Allow users to specify the value to encode the Nature of Number field of the TCAP Outgoing Called Party parameter
5. Allow users to specify the value to encode the Numbering Plan field of the TCAP Outgoing Called Party parameter
6. Allow users to specify the digit encoding format of the locreq TCAP Outgoing Called Party parameter
7. Allow users to specify the MSCID values to be encoded in the locreq message
8. Allow users to specify the ESN values to be encoded in the locreq message
9. Allow users to specify how the digits of the locreq MIN parameter shall be encoded.

The following encoding rules are followed when a SRI ack is returned:

1. When a SRI ack is returned, the EAGLE 5 ISS follows the SRI ack encoding rules along with the following enhancements for added flexibility
2. Allow users to specify which SRI parameter (the TCAP MSRN parameter) encodes the RN (and/or DN) information
3. Allow users to specify the value to encode the Nature of Address field of the TCAP MSRN parameter
4. Allow users to specify the value to encode the Numbering Plan field of the TCAP MSRN parameter.

MNP SCCP Service Re-Route Capability

This feature is designed to handle and control re-routing of MNP traffic from an affected node to alternate nodes within an operators network. This feature is an optional feature and does not affect the normal MNP functionality. This feature consists of the following main functions:

- [Service State](#) on page 34
- [MNP Re-Routing](#) on page 34
- [MNP Capability Point Codes](#) on page 34

Service State

Service state is part of the MNP SCCP Service Re-Route Capability. Service state is used to indicate the current state of MNP, either `ONLINE` or `OFFLINE`. Service state also gives the user the option to mark MNP as `OFFLINE` or `ONLINE` based on the current behavior. If a MNP problem is identified, MNP can be marked `OFFLINE` to initiate the re-routing procedure. When the TSM cards running the SCCP application need to be reloaded, MNP can be marked `OFFLINE` until enough cards are in-service and then bring MNP `ONLINE` in a controlled fashion. This feature also provides the option to mark MNP `OFFLINE` to perform a controlled re-routing during this state.

MNP Re-Routing

MNP Re-Routing is an optional feature and is enabled by defining a list of alternate PCs or by defining the GTT option. MNP re-routing is activated by marking MNP `OFFLINE`. When MNP is `OFFLINE` and alternate PCs are provisioned, any messages destined for MNP are re-routed to the available alternate PCs that are defined for MNP. If alternate PCs are not provisioned or none are available, then the GTT option is used. If the GTT option is set to `YES`, then messages destined for MNP will fall through to GTT as part of the re-routing procedure.

Re-Routing is applied to all MNP messages (based on `SRVSEL`). There is no distinction of DPC of the messages. The DPC of the message can be either `True`, `Secondary`, or `Capability Point code`.

MNP Capability Point Codes

Capability Point Codes (CPC) are also supported for MNP. The use of MNP capability point code aids the adjacent nodes in knowing about MNP outages. When MNP is brought down through administrative commands, all traffic destined to this MNP node will generate a Transfer Prohibited (TFP) message to the adjacent node about the MNP CPC. The TFP response to the adjacent node causes the traffic originating nodes to stop sending MNP traffic to this node. All MNP traffic coming into this node is sent to the alternate MNP nodes. Adjacent nodes will initiate route-set-test procedures after receipt of the TFP response.

If the messages are destined to the EAGLE 5 ISS true point code, then TFP messages are not generated when the MNP service is OFFLINE . The originator would not be aware of the outage.

Once MNP is back in service on the EAGLE 5 ISS, a Transfer Allowed (TFA) message is sent to the traffic adjacent nodes in response to route-set-test message. The traffic originating nodes will then start sending MNP traffic to the original MNP node.

MNP Capability point codes can be provisioned when the MNP feature is ON. There can be more than one Capability Point Code assigned to MNP CPCType.

When the MNP feature is turned ON and the MNP service state is set to OFFLINE , the user can change the service to ONLINE at any point. Once the feature is turned ONLINE , MNP will start processing messages if at least one TSM card running the SCCP application is IS-NR.

The MNP service can be set to OFFLINE at any point. This causes the EAGLE 5 ISS to stop processing MNP traffic and re-routing is performed.

The MNP service state is persistent. Booting the OAM or all the TSM cards running the SCCP application will not change the service state. Commands must be used to change the service state.

MNP supports up to 7 alternate PCs per domain. All 6 domains (ANSI, ITU-I, ITUN14, ITUN14 spare, ITU-I spare and ITUN24) are supported. An entire set of alternate PCs are considered as a re-route set. A GTT option is supported for MNP re-route. When the MNP service is OFFLINE , MNP messages fall through to GTT based on the GTT option. This option is set to YES by default.

MNP SCCP Service Re-Route Capability Summary

If the MNP service is not normal (because the RTDB is not in sync with MPS or if cards are misrouting MNP messages) then the MNP service state should be changed to OFFLINE .

Before changing MNP service to OFFLINE , it should be decided what kind of re-routing will be used during the outage. The EAGLE 5 ISS supports re-routing data to alternate point codes or falling through to GTT as two possible options. Re-routing to alternate point code has priority over falling through to GTT. Examples of the two options follow:

Option 1

Define alternate point codes to re-route MNP traffic. This is the recommended option. Up to 7 alternate MNP nodes can be provisioned to re-route all the incoming MNP traffic. Once provisioned, the MNP service can be changed to OFFLINE . This example has any incoming being MNP traffic being load-shared to point codes based on the relative cost.

```
chg-sccp-serv:serv=mnpc:pci1=1-1-1:rc1=10:pci2=2-2-2:rc2=10:pci3=3-3-3:rc3=10:pci4=4-4-4:rc4=10
```

```
chg-sccp-serv:serv=mnpc:pci1=1-1-1:rc1=10:pci2=2-2-2:rc2=10:pci3=3-3-3:rc3=10:pci4=4-4-4:rc4=10
```

```
chg-sccp-serv:serv=mnpc:pci1=5-5-5:rc1=10:pci2=6-6-6:rc2=10:pci3=7-7-7:rc3=10:pci4=8-8-8:rc4=10
```

```
chg-sccp-serv:serv=mnpc:state=offline
```

Option 2

With this option default GTT translations are provisioned for MNP service. Then the chg-sccp-serv command is used to provision GTT=YES. All MNP messages will fall through to GTT. An example command follows:

```
chg-sccp-serv:serv=mnpc:gtt=yes (it is yes by default)
```

Once the MNP re-routing data is provisioned, MNP service can be changed to OFFLINE . At this point all MNP traffic will be re-routed. The user can take necessary steps to correct the MNP service

on the node. Until all the cards or enough cards are in active state with valid MNP subscriber database, MNP service should not be changed to ONLINE .

Table 9: MNP SCCP Service Re-Route Capability Summary on page 36 shows the actions taken when the MNP service is offline, a message arrives at the affected node requiring MNP service, and the TSM cards running the SCCP application are available.

Table 9: MNP SCCP Service Re-Route Capability Summary

Result of service selector	DPC	Alternate point code defined and available	GTT to be performed as fall through	Message Handling	Network Management
MNP	MNP Capability PC	Yes	N/A	Re-Route to alternate point code based on relative cost	TFP concerning CPC
MNP	MNP Capability PC	No [*]	Yes	Fall through to GTT and perform GTT	TFP concerning CPC
MNP	MNP Capability PC	No [*]	No	Generate UDTS (return cause = network failure)	TFP concerning CPC
MNP	MNP Capability PC	Not Defined	Yes	Fall through to GTT and perform GTT	TFP concerning CPC
MNP	MNP Capability PC	Not Defined	No	Generate UDTS (return cause = no relation for this addr)	TFP concerning CPC
Not MNP	MNP Capability PC	N/A	N/A	Perform appropriate Service/GTT	None
MNP	True or Secondary PC or non-MNP CPC	Yes	N/A	Re-Route to alternate point code based on relative cost	None

Result of service selector	DPC	Alternate point code defined and available	GTT to be performed as fall through	Message Handling	Network Management
MNP	True or Secondary PC or non-MNP CPC	No [*]	No	Generate UDTS (return cause = network failure)	None
MNP	True or Secondary PC or non-MNP CPC	No [*]	Yes	Fall through to GTT and perform GTT	None
MNP	True or Secondary PC or non-MNP CPC	Not Defined	Yes	Fall through to GTT and perform GTT	None
MNP	True or Secondary PC or non-MNP CPC	Not Defined	No	Generate UDTS (return cause = no relation for this addr)	None
Not MNP	True or Secondary PC or non-MNP CPC	N/A	N/A	Perform appropriate Service/GTT	None
*Alternate point codes are defined and unavailable (prohibited or congested).					

MTP Routed SCCP Traffic for IGM

IGM supports MTP routed SCCP messages (Figure 2-8). LOCREQ messages are supported. This feature cannot be turned on unless at least one of the following is turned on:

- A-Port
- IGM
- G-Flex

Use of MTP Msgs for SCCP Apps feature adversely affects the SCCP capacity, as all of these messages are counted under SCCP capacity.

After this feature is turned on, all SCCP messages are routed to the TSM cards running the SCCP application. The TSM card running the SCCP application then performs SCCP decode/verification.

If the MTP routed messages have CDPA GTI = 0 and IGM is turned on, then the message is sent for IGM processing. If MNP service is OFFLINE, then MTP routing is performed on the messages.


If the MTP routed messages have CDPA GTI ≠ 0, then SRVSEL lookup is performed using the SCCP CDPA information. If the result of the lookup is MNP service, the message is sent to MNP handling. If a service selector is not defined or does not match, or if the service is OFFLINE, then MTP routing is performed on the messages. The MNP SCCP Service re-route is not performed on MTP routed messages.

MNP checks to see if the TCAP portion of the message is ITU or ANSI. If the message has ITU TCAP then normal routing (or G-Flex if provisioned) is performed on the message. If the message has ANSI TCAP then, IGM general TCAP/MAP verification is performed if A-Port or IGM is turned on.

SMS Address conversion is not affected by the MTP Msgs for SCCP Apps feature; SMS conversion handles only Registration Notification and SMS Notification messages.

A feature access key (FAK) for part number 893017401 is required to enable the MTP Msgs for SCCP Apps feature.

Figure 8: Message Control Flow

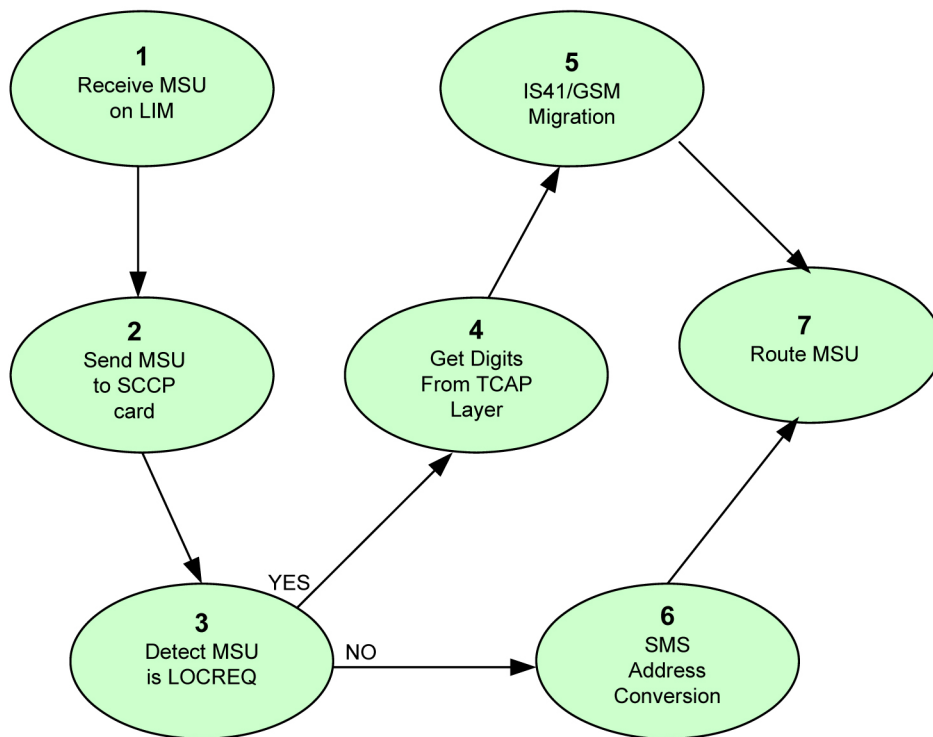

Detailed message control flow routing information follows:

1. The MSU is received by the EAGLE 5 ISS
2. The MSU is sent to the SCCP Function.
3. The TSM card running the SCCP application examines the MSU and determines if it is a LOCREQ message.

4. For LOCREQ, the TCAP Digit Parameter contains the digits to apply to Migration. This is a mandatory parameter. The digits are in encoded.
5. IS41/GSM Migration is applied to the digits to determine if the subscriber is migrated. If so, a LOCREQ Return Result is generated to the OPC. If not, the LOCREQ is routed.
6. If the message is not a LOCREQ, ITUN-ANSI SMS Address Conversion is applied. SMS Address conversion feature does not have any impact because on this feature because SMS conversion handles only Registration Notification and SMS Notification messages.
7. The MSU is routed. MTP and SCCP conversion are performed if crossing a network boundary.

Detailed message processing for MTP Routed messages are included in the following tables.

- [Table 10: MTP Routed Handling Example 1](#) on page 39: Message processing for MTP routed messages when IGM is on, A-Port, G-Port, and G-Flex are OFF. SERV=MNP or GTI=0.
- [Table 11: MTP Routed Handling Example 2](#) on page 40: Message processing for MTP routed messages when IGM, A-Port, G-Port are ON. SERV=MNP or GTI=0.
- [Table 12: MTP Routed Handling Example 3](#) on page 40: Message processing for MTP routed messages when G-Flex and IGM (or A-Port, G-Port) are ON. SERV=MNP.

Table 10: MTP Routed Handling Example 1

NE/PT	SRI	SRI_SM	Other GSM	LOCREQ	SMSREQ	Other IS41
RN and PT = 0	MTP routing	MTP routing	MTP routing	Relay	MTP routing	MTP routing
RN and PT ≠ 0	MTP routing	MTP routing	MTP routing	MTP routing	MTP routing	MTP routing
SP and PT = 5	MTP routing	MTP routing	MTP routing	ACK (IS412GSM prefix)	MTP routing	MTP routing
SP and PT ≠ 5	MTP routing	MTP routing	MTP routing	Relay	MTP routing	MTP routing
No NE and PT = 0	MTP routing	MTP routing	MTP routing	MTP routing	MTP routing	MTP routing
No NE and PT=1, 2, or No PT	MTP routing	MTP routing	MTP routing	MTP routing	MTP routing	MTP routing
No NE and PT = 5	MTP routing	MTP routing	MTP routing	ACK (IS412GSM prefix)	MTP routing	MTP routing

NE/PT	SRI	SRI_SM	Other GSM	LOCREQ	SMSREQ	Other IS41
No DN entry found	MTP routing	MTP routing	MTP routing	MTP routing	MTP routing	MTP routing

Table 11: MTP Routed Handling Example 2

NE/PT	SRI	SRI_SM	Other GSM	LOCREQ	SMSREQ	Other IS41
RN and PT = 0	MTP routing	MTP routing	MTP routing	Relay	MTP routing	MTP routing
RN and PT ≠ 0	MTP routing	MTP routing	MTP routing	ACK (RN from EPAP)	MTP routing	MTP routing
SP and PT = 5	MTP routing	MTP routing	MTP routing	ACK (IS412GSM prefix)	MTP routing	MTP routing
SP and PT ≠ 5	MTP routing	MTP routing	MTP routing	Relay	MTP routing	MTP routing
No NE and PT = 0	MTP routing	MTP routing	MTP routing	MTP routing	MTP routing	MTP routing
No NE and PT=1, 2, or No PT	MTP routing	MTP routing	MTP routing	ACK (no NE)	MTP routing	MTP routing
No NE and PT = 5	MTP routing	MTP routing	MTP routing	ACK (IS412GSM prefix)	MTP routing	MTP routing
No DN entry found	MTP routing	MTP routing	MTP routing	MTP routing	MTP routing	MTP routing

Table 12: MTP Routed Handling Example 3

NE/PT	SRI	SRI_SM	Other GSM	LOCREQ	SMSREQ	Other IS41
RN and PT = 0	Relay	Relay	Relay	Relay	Relay	Relay

NE/PT	SRI	SRI_SM	Other GSM	LOCREQ	SMSREQ	Other IS41
RN and PT ≠ 0	Relay	Relay	Relay	ACK (no NE)	Relay	Relay
SP and PT = 5	Relay	Relay	Relay	ACK (IS412GSM prefix)	Relay	Relay
SP and PT ≠ 5	Relay	Relay	Relay	Relay	Relay	Relay
No NE and PT = 0	MTP routing	MTP routing	MTP routing	MTP routing	MTP routing	MTP routing
No NE and PT=1, 2, or No PT	MTP routing	MTP routing	MTP routing	ACK (no NE)	MTP routing	MTP routing
No NE and PT = 5	MTP routing	MTP routing	MTP routing	ACK (IS412GSM prefix)	MTP routing	MTP routing
No DN entry found	MTP routing	MTP routing	MTP routing	MTP routing	MTP routing	MTP routing

General Numbering Requirements

Incoming called party numbers, from the SCCP portion, destined for IGM processing are conditioned to fit the GDB requirements where possible. The following factors are used to condition the SCCP numbers.

- Based on provisioning: If the GTT selectors available in the incoming message match an entry in the IGM selector table, then the service numbering plan from the selector table entry uses that number's numbering plan. Further conditioning is applied based on this new numbering plan.
- Based on configurable options: If the GTT selectors available in the incoming message match an entry in the IGM selector table, then the service nature of address from the selector table entry uses that number's nature of address. Further conditioning is applied based on this new nature of address.
- If the nature of address is Subscriber, the default CC + default NC (network code for E.164) are prepended to the number. The default codes to be used by the EAGLE 5 ISS must be

previously provisioned by the EAGLE 5 ISS operator. If not, a UIM is issued, and the message falls through to GTT.

Numbers with fewer than five digits after the above conditioning are not used for IGM. In this case, a UIM is issued, and the message falls through to GTT.

Numbers with more than fifteen digits after the above conditioning are not used for IGM. In this case, a UIM is issued, and the message falls through to GTT.

Maintenance

Validation of IGM Hardware Configuration

Service Module card loading has been modified to verify the validity of the hardware configuration for the Service Module cards. Hardware verification includes the following.

- **Service Module Card Main Board Verification**

An AMD-K6 or better main board is required to support the IGMVSCCP application on the Service Module card. EAGLE 5 ISS maintenance stores the validity status of the main board configuration of the Service Module card.

Note: The system does not allow the IGM feature to be turned on if the hardware configuration is invalid.

- During initialization, the VSCCP application determines the main board type. The SCCP maintenance block is the mechanism used to relay the main board information to OAM. This requires that the application software be loaded to the Service Module card and then the main board information received in the SCCP maintenance block must be verified. If the main board is determined to be invalid for the IGM application, loading of the Service Module card is automatically inhibited.
- **Service Module Card Applique Memory Verification**

The VSCCP application performs two types of memory validation to determine whether or not a Service Module card has sufficient memory to run IGM:



CAUTION

CAUTION: IGM cannot be enabled if any of the Service Module cards have less than 4 GB of memory installed. Refer to the *Dimensioning Guide for EPAP Advanced DB Features* Technical Reference for important information on the dimensioning rules and the Service Module card database capacity requirements.

- **Local Memory Validation** . When the IGM feature is first enabled, or any time the IGM feature is enabled and the Service Module card is initializing, VSCCP checks if the Service Module card has at least 4GB of memory installed.
- **Real-Time Memory Validation (during card initialization)** . After communications between the Service Module card and EPAP have been established, and the Service Module card has joined the RMTP Tree, the EPAP starts downloading the RTDB to the Service Module card. After the Service Module card has downloaded the RTDB, it continues to receive database updates as necessary. The EPAP includes the size of the current RTDB in all records sent to the Service Module card. The Service Module card compares the size required to the amount of memory installed, and issues a minor alarm once the database exceeds 80% of the Service Module card memory. If the database completely fills the Service Module card memory, a major alarm is

issued, the Service Module card leaves the RMTP tree, and the status of the Service Module card changes to IS-ANR/Restricted. The Service Module card continues to carry traffic.

- **Actions Taken When Hardware Determined to be Invalid**

When the hardware configuration for a Service Module card is determined to be invalid for the IGM application, SCM automatically inhibits loading for that specific Service Module card. A major alarm is generated indicating that card loading for that Service Module card has failed and has been automatically inhibited (that is, prevented from reloading again). Refer to [IGM Related Alarms](#) on page 128 for the specific alarm that is generated. When card loading has been inhibited, the primary state of the card is set to `oos-mt-dsbl'd`, and the secondary state of the card is set to `MEA` (Mismatch of Equipment and Attributes).

The following actions apply to a Service Module card determined to be invalid:

- The Service Module card will not download the EAGLE 5 ISS databases
- The Service Module card will not download the real-time RTDB from the EPAP.
- The Service Module card will not accept RTDB updates (that is, add, change, delete) from the EPAP, nor will it accept STP database updates.

To activate loading of a Service Module card that has been automatically inhibited, the craftsperson must enter the `alw-card` command (`alw-card:loc=xxxx`).

- **Unstable Loading Mode**

At some point, having a number of invalid Service Module cards results in some of the LIMs (Link Interface Module) being denied SCCP services. The threshold is monitored; if the number of valid Service Module cards is insufficient to provide service to at least 80% of the IS-NR LIMs, the system is said to be in an unstable loading mode. For additional reasons an EAGLE 5 ISS might be in an unstable loading mode, refer to [Loading Mode Support Status Reporting](#) on page 122.

Maintenance Commands

The following commands are used for IGM maintenance.

- The debug command `ent-trace` traps IGM MSUs (Message Signaling Unit) based on the point code of the switch that generated the MSU (SSP), a particular DN and entity ID. For MSISDN and entity ID, the comparison is based on the search key built from the CdPA GTAI (Global Title Address Information) after any conditioning. The existing GT SCCP trigger also applies to IGM messages.
- The command `rept-stat-sccp` reports current MNP statistics. A MSU is considered to be a IGM MSU after SRVSEL. This command reports IGM statistics on the basis of a single TSM card running the SCCP application or on a IGM system basis.

For more information, refer to [Maintenance and Measurements](#) on page 119.

IGM Loading Mode Support

Loading mode support is not applicable for RTDB updates because Service Module cards use incremental loading from the EPAP. STP Administrative updates are allowed while a Service Module card is loading and the system is above the 80% card stability threshold. If it is below the 80% threshold, loading mode support allows STP administrative updates to be rejected while cards finish loading and cross the 80% or better threshold.

For IGM, loading mode support is applicable for database updates originating from the EAGLE 5 ISS GPSM-II (General Purpose Service Module II cards) destined for the Service Module cards.

Audit Requirements

The IGM audit does not change EAGLE 5 ISS compliance to STP audit requirements, to which it currently adheres. New IGM subscriber database tables residing on the EAGLE 5 ISS TDM fixed disks are audited by the existing STP audit, which only verifies tables on the EAGLE 5 ISS active and standby TDMs. There are new audit mechanisms for new IGM tables residing on the EPAP platform that are downloaded to the Service Module cards. The new audit mechanisms consist of the following.

- On each Service Module card and on the standby EPAP, a background audit calculates checksums for each IGM RTDB table record and compares the calculated checksum against the checksum value stored in each record. If they are not the same, then a *database corrupt* alarm is issued.
- A process that runs periodically on the active EPAP (approximately every five seconds or less) sends the latest RTDB database level to all the Service Module cards and the standby EPAP. If the database levels do not match, the standby EPAP or Service Module card issues a *diff level* alarm.

For more information on the audit mechanisms, refer to the *EPAP Administration Manual*.

Chapter 3

EAGLE 5 ISS Migration Commands

Topics:

- [Introduction Page 46](#)
- [EAGLE 5 ISS Commands for Migration Page 46](#)

This chapter provides brief descriptions of the EAGLE 5 ISS commands that are used for the configuration, control, maintenance, and measurements of the IS41 GSM Migration (IGM) feature.

Introduction

This chapter describes the Commands for maintenance, measurements, and administration of the Migration features. EAGLE 5 ISS Migration commands provide for the provisioning, operations, and maintenance activities of the EAGLE 5 ISS Service Module cards and associated network connections.

EAGLE 5 ISS Commands for Migration

This section includes the EAGLE 5 ISS commands that are either new or modified for the Migration feature. This chapter contains a brief description of the functions the commands provide and examples of their use with the Migration feature. User commands are listed in [Table 13: Commands for EAGLE 5 ISS Migration](#) on page 46.

The command examples in this chapter illustrate the requirements and provide suggestions for suitable names and output. Complete descriptions of these commands are shown in detail in the *Commands Manual*, including parameter names, valid values, and output examples for the commands.

Table 13: Commands for EAGLE 5 ISS Migration

EAGLE 5 ISS Commands for Migration Feature			
act-gpl	chg-srvsel	inh-card	rtrv-ctrl-feat
alw-card	copy-gpl	rept-ftp-meas	rtrv-card
chg-ctrl-feat	dlt-map	rept-meas	rtrv-gpl
chg-db	dlt-card	rept-stat-alm	rtrv-gsmopts
chg-gpl	dlt-sccp-serv	rept-stat-db	rtrv-is41opts
chg-gsmopts	dlt-srvsel	rept-stat-gpl	rtrv-measopts
chg-is41opts	enable-ctrl-feat	rept-stat-meas	rtrv-sccp-serv
chg-measopts	ent-card	rept-stat-mps	rtrv-sid
chg-map	ent-map	rept-stat-sccp	rtrv-srvsel
chg-sccp-serv	ent-srvsel	rept-stat-sys	unhb-alm

EAGLE 5 ISS Commands for Migration Feature			
chg-sid	inh-alm	rept-stat-trbl	

EAGLE 5 ISS GSM System Options Commands

The Migration system options (`gsmopts`) commands change and display Migration-specific system options in the EAGLE 5 ISS database. The two variations are described in the following: `chg-gsmopts` and `rtrv-gsmopts`. For details on these commands, refer to the *Commands Manual*.

- chg-gsmopts: Change GSM System Options Command** – The `chg-gsmopts` command changes IGM-specific options in the database. This command updates the GSMOPTS table. The default parameter values are always overwritten when specified. Refer to the *Commands Manual* for details of this command

Table 14: chg-gsmopts Parameters - Class = DATABASE

Parameter	Optional/Mandatory	Range	Description
defmapvr	Optional	1-3	Default MAP version
gsm2is41	Optional	1-15 digits, none	GSM to IS-41 migration prefix
is412gsm	Optional	1-15 digits, none	IS-41 to GSM migration prefix
migrpfx	Optional	single, multiple	Migration prefix
msisdntrunc	Optional	1 digit (0-5)	MS ISDN Truncation digits
msrndig	Optional	rn, rndn, ccrndn	RN used "as is" or with MSISDN
msrnnai	Optional	1-7	NAIV for the MSRN
msrnp	Optional	0-15	Numbering plan for the MSRN
multcc	Optional	1 to 3 digits (0-9, a-f, or A-F)	Multiple Country Code
nmultcc	Optional	1 to 3 digits (0-9, a-f, A-F, or none)	New Multiple Country Code

Parameter	Optional/ Mandatory	Range	Description
serverpfx	Optional	1-4 digits, none	Server SRI prefix
srfaddr	Optional	1-15 digits	Entity address of MNP_SRF node
srfnai	Optional	0-127	NAIV of the MNP_SRF
srfnp	Optional	0-15	Numbering plan value of the MNP_SRF Network Code
sridn	Optional	tcap, sccp	Send Routing Information Dialed Number location
sridnnotfound	Optional	gtt, srinack	When G-Port encounters an RTDB query result that indicates that the given DN is not known, SRIDNNOTFOUND parameter value determines further processing.

- **rtv-gsmopts: Retrieve System Options Command** – The `rtv-gsmopts` command displays the GSM option indicators maintained in the GSMOPTS table

The following GSM options are displayed.

```
tekelecstp 08-05-05 14:05:45 EST EAGLE 39.0.0
GSM OPTIONS
-----
DEFMCC      = NONE
DEFMNC      = NONE
SRFADDR     = NONE
MSRNDIG     = RN
DEFMAPVR    = 1
SRIDN       = TCAP
IS412GSM    = NONE
MULTCC      = 2
MULTCC      = 4
MULTCC      = 5
MULTCC      = 20
MULTCC      = 119
MULTCC      = 121
MULTCC      = 123
```

```

MULTCC      = 124
MSISDNTRUNC = 0
MIGRPPFX    = SINGLE
GSM2IS41    = NONE

```

;

EAGLE 5 ISS IS41 Options Commands

The Migration IS41 options (is41opts) commands are used to change and report on the values of one or more of the STP node level processing option indicators maintained in the IS41option tables. All values are assigned initially to system defaults at STP installation, and the values can be updated later using the `chg-is41opts` command.

- **chg-is41opts: Change IS41 Options Command** – The `chg-is41opts` command changes IS41-specific options in the database. This command updates the IS41OPTS table. The default parameter values are always overwritten when specified. Refer to the *Commands Manual* for details of this command.

Table 15: chg-is41opts Parameters - Class = DATABASE

Parameter	Optional/ Mandatory	Range	Description
esnmfg	Optional	0-255	TCAP LOCREQ ESN Manufacturer code. This parameter specifies the value to be encoded in the TCAP LOCREQ ESN parameter in the manufacturer code section.
esnsn	Optional	0-16777215	TCAP LOCREQ ESN Serial Number. This parameter specifies the value to be encoded in the TCAP LOCREQ ESN parameter in the serial number section.
iec	Optional	digit string 1-5 digits, none	International escape code
locreqdn	Optional	tcap, sccp	Use this parameter to define whether the Called Party will be obtained from the SCCP layer or the

Parameter	Optional/ Mandatory	Range	Description
			TCAP layer of a received LOCREQ for database lookup
locreqrmhrn	Optional	yes, no	Locreq RM HRN. Used to specify if HomeRN is to be removed from the TCAP Outgoing Called party for a relayed LOCREQ message.
mscmktid	Optional	0-65535	Locreq MSCID market id. Used to specify the value to be encoded in locreq MSCID parameter for Market ID.
mscswitch	Optional	0-255	Locreq mscid market id switch part is used to specify the value to be encoded in locreq MSCID parameter, market id switch part
mtplocreqnai	Optional	ccrndn, frmmsg, intl, natl, rmidn, rnrndn, rnsdn, sub, locreqlen	Message Translation Part LOCREQ nature of address indicator. Used to define how Called Party obtained from the TCAP layer of a received MTP-routed LOCREQ message is interpreted.
nec	Optional	digit string 1-5 digits, none	National escape code
rspcdpari	Optional	frmmsg, gt, ssn	Response Called Party Routing Indicator. Use this parameter to specify the value of the Routing Indicator

Parameter	Optional/ Mandatory	Range	Description
			bit to encode the SCCP CdPA GTA of a returned locreq message.
rspcgpanai	Optional	0-127, none	Response calling party Nature of Address Indicator (NAI). Used to specify a new NAI value to override the NAI value specified in the SCCP CdPA of a received LOCREQ/SMSREQ if the message is to be relayed after database lookup.
rspcgpanp	Optional	0-15, none	Response calling party numbering plan. Used to specify a new Numbering Plan value to override the Numbering Plan value specified in the SCCP CdPA of a received LOCREQ/SMSREQ if the message is to be relayed after database lookup.
rspcgpapcp	Optional	frmsg, on, off	Response Calling Party Point Code Present. Used to specify the value of the Point Code Present bit to encode the SCCP CgPA GTA of a returned locreq message
rspcgpari	Optional	frmsg, gt, ssn	Response Calling Party Routing Indicator. Used to specify the value of the Routing Indicator

Parameter	Optional/ Mandatory	Range	Description
			bit to encode the SCCP CgPA GTA of a returned locreq message.
rspcgpatt	Optional	0-255, none	Response calling party translation type. Used to specify a new TT value to override the TT value specified in the SCCP CdPA of a received LOCREQ/SMSREQ if the message is to be relayed after database lookup.
rspdig	Optional	ccrndn, hrnrndn, rn, rndn	Use this parameter to specify the digit encoding format of the locreq TCAP Outgoing Called Party parameter on a per EAGLE 5 ISS node basis.
rspdigtype	Optional	0-255	Response digit type. Used to specify DigitType value to encode the TCAP Outgoing Called Party parameter.
rspmin	Optional	homern, nothomern, tendelhomern, tenhomern, tenzero	Response locreq min parameter encoding. Used to specify how the digits of the locreq MIN parameter are to be encoded.
rspnon	Optional	0-255, none	MSRN nature of number. Used to specify the Nature of Number value of the TCAP Outgoing Called Party parameter.

Parameter	Optional/ Mandatory	Range	Description
rspnp	Optional	0-15, none	MSRN numbering plan. Used to specify the Numbering Plan values of the TCAP Outgoing Called Party parameter.
rspparm	Optional	ddigit, rtdigit, tlist	Response parameter. Used to specify which TCAP locreq parameter (TCAP Outgoing Called Party) will encode the RN and/or DN information.
smsreqbypass	Optional	yes, no	Use this parameter to specify whether a received SMSREQ that passes the MNP Service Selector (serv=mnps parameter is specified) will be subject to Migration message processing. Note: The MT-Based IS41 SMS NP feature described in the <i>A-Port Feature Manual</i> does not consider the value of this parameter. If smsreqbypass has a value of yes, the IGM feature will not be applied but the message will be considered for MT-Based IS41 SMS NP processing.
tcapsnai	Optional	ccrnodn, frmmsg, intl, natl, rmidn, rnndn, rnsdn, sub	Use this parameter to specify how Called Party, obtained from the TCAP layer of a received LOCREQ

Parameter	Optional/ Mandatory	Range	Description
			message shall be interpreted, either based on the Nature of Number encoded in the TCAP Digits[Dialed] parameter, or based on the selection specified by the mtplocreqnai parameter.

- **rtrv-is41opts: Retrieve System Options Command** – The `rtrv-is41opts` command displays the IS41 option indicators maintained in the IS41OPTS table.

The following IS41 options are displayed.

```
rtrv-is41opts
tekelecstp 08-01-15 12:49:20 EST EAGLE 39.0.0

IS41 OPTIONS
-----
SMSREQBYPASS      = NO
LOCREQDN          = SCCP
IEC               = NONE
NEC               = NONE
RSPCGPARI         = FRMSG
RSPCGPAPCP       = FRMSG
RSPCDPARI        = FRMSG
RSPCDPAPCP       = OFF
RSPCGPANAI       = NONE
RSPCGPANP        = NONE
RSPCGPATT        = NONE
MTPLOCREQNAI     = FRMSG
RSPPARM          = TLIST
RSPDIG           = RNDN
RSPNON           = NONE
RSPNP            = 2
RSPMIN           = HOMERN
MSCMKTID         = 0
MSCSWITCH        = 0
ESNMFG           = 0
ESNSN            = 0
RSPDIGTYPE       = 6
LOCREQRMHRN      = NO
TCAPSNAI         = FRMSG
MTPLOCREQLEN     = 15
```

EAGLE 5 ISS Migration Service Selector Commands

The Migration service selector (`srvsel`) commands are used to provision, remove, change, and report on the applicable service selectors required to change a service entry for DSM services.

These commands provide flexibility when provisioning the type of messages that require Migration processing. Four variants are described in the following sections: `ent-srvsel`, `chg-srvsel`, `dlt-srvsel`, and `rtrv-srvsel`. For further details on the EAGLE 5 ISS service selector commands, such as command rules and output format, refer to the *Commands Manual*.

- **ent-srvsel: Enter Service Selectors Command** – The `ent-srvsel` command specifies that the applicable Migration service selectors indicating Migration processing is required. The Migration FAK must be enabled before entering this command. The available parameters are:

Table 16: ent-srvsel Parameters - Class = DATABASE

Parameter	Optional/ Mandatory	Range	Description
gti, gtia, gtii, gtin, gtin24	Mandatory	2, 4	Global Title Indicator
serv	Mandatory	eir, gflex, gport, inpq, inpmr, smsmr, idps, idpr, mnp, vflex, atinp	DSM service
ssn	Mandatory	0-255, *	Subsystem number
tt	Mandatory	0-255	Translation Type
nai	Optional	1sub, rsvd, natl, intl	Nature Of Address Indicator
naiv	Optional	0-127	NAI Value
np	Optional	e164, generic, x121, f69, e210, e212, e214, private	Numbering Plan
npv	Optional	10-15	Numbering Plan Value
snai	Optional	1sub, natl, intl, rmidn, rmidn, rnsdn, ccrndn	Service Nature of Address Indicator
snp	Optional	1e164, e212, e214	Service Numbering Plan

- **chg-srvsel: Change Service Selector Command** – The `chg-srvsel` command specifies the applicable Migration selectors required to change an existing Migration selector entry. The available parameters are:

Table 17: chg-srvsel Parameters - Class = DATABASE

Parameter	Optional/ Mandatory	Range	Description
gti, gtia, gtii, gtin, gtin24	Mandatory	2, 4	Global Title Indicator
ssn	Mandatory	0-255, *	Subsystem number
tt	Mandatory	0-255	Translation Type
nai	Optional	sub, rsvd, natl, intl	Nature Of Address Indicator
naiv	Optional	0-127	NAI Value
np	Optional	e164, generic, x121, f69, e210, e212, e214, private	Numbering Plan
npv	Optional	0-15	Numbering Plan Value
nserv	Mandatory	eir, gflex, gport, inpq, inpmr, smsmr, idpr, idps, mnp, vflex, atinp	New DSM service
nsnai	Optional	sub, natl, intl, rnidn, rnrndn, rnsdn, ccrndn, none	New Service Nature of Address Indicator
nsnp	Optional	e164, e212, e214, none	New Service Numbering Plan

- **dlt-srvsel: Delete Migration Service Selector Command** – The dlt-srvsel command deletes a Migration service selector. The available parameters are:

Table 18: dlt-srvsel Parameters - Class = DATABASE

Parameter	Optional/ Mandatory	Range	Description
gti, gtia, gtii, gtin, gtin24	Mandatory	2, 4	Global Title Indicator
ssn	Mandatory	0-255, *	Subsystem number

Parameter	Optional/ Mandatory	Range	Description
tt	Mandatory	0-255	Translation Type
nai	Optional	sub, rsvd, natl, intl	Nature Of Address Indicator
naiv	Optional	0-127	NAI Value
np	Optional	e164, generic, x121, f69, e210, e212, e214, private	Numbering Plan
npv	Optional	0-15	Numbering Plan Value

- rtrv-srvsel: Retrieve Migration Service Selector Command** – The `rtrv-srvsel` command displays a list of administered Migration service selector combinations. All output is sorted first by service, then by global title domain (ANSI first, followed by ITU), GTI, translation type, numbering plan, and by the nature of address indicator. The output can be filtered by specifying any optional parameter. The available parameters are:

Table 19: rtrv-srvsel Parameters - Class = DATABASE

Parameter	Optional/ Mandatory	Range	Description
gti, gtia, gtii, gtin, gtin24	Optional	2, 4	Global Title Indicator
nai	Optional	sub, rsvd, natl, intl	Nature Of Address Indicator
naiv	Optional	0-127	NAI Value
np	Optional	e164, generic, x121, f69, e210, e212, e214, private	Numbering Plan
npv	Optional	0-15	Numbering Plan Value
serv	Optional	eir, gflex, gport, inpq, inpmr, smsmr, idpr, idps, mnp, vflex, atinp	DSM service

Parameter	Optional/ Mandatory	Range	Description
snai	Optional	sub, natl, intl, rnidn, rnndn, rnsdn, ccrndn	Service Nature of Address Indicator
snp	Optional	e164, e212, e214	Service Numbering Plan
ssn	Mandatory	0-255, *	Subsystem number
tt	Optional	0-255	Translation Type

EAGLE 5 ISS Feature Key Control Commands

These commands are used to enable, update, view, and control the Migration feature. A Feature Access Key is used to turn on the Migration feature. This feature must be purchased in order to have access to the Feature Access Key, which must be used when enabling these features.

No temporary key is associated with this feature. After the feature is turned on, it cannot be turned off. Two steps are performed to turn on the Migration feature. The first step is to enable the feature. The second step is to set the status to on.

Additional verifications are performed to ensure the correct hardware is present in the system. These checks include verifying that the GTT bit is on and that there are no SCCP GLP cards provisioned. Refer to the *Commands Manual* for details of this command.

The part number 893017301 is used to enable Migration feature on the EAGLE 5 ISS.

- **enable-ctrl-feat: Enable Control Feature Command** – The `enable-ctrl-feat` command is used for the permanent enabling of the Migration feature. An example of the command using the Migration part number is:
`enable-ctrl-feat:partnum=893017301:fak=<Feature Access Key>`
- **chg-ctrl-feat: Change Control Feature Command** – The `chg-ctrl-feat` command is used to activate the Migration feature. This command requires the Migration feature to be enabled as a prerequisite. The Migration feature cannot be enabled if any TSM cards are in the system.
`chg-ctrl-feat:partnum=893017301:status=on`
- **rtrv-ctrl-feat: Retrieve Control Feature Command** – The `rtrv-ctrl-feat` command is used to display the status of the features (on/off) and to show the trial period remaining if temporarily enabled. An example output is :

```
The following features have been permanently enabled:
Feature Name      Partnum  Status  Quantity
IPGWx Signaling TPS  893012805  on      2000
ISUP Normalization  893000201  on      ----
Command Class Management  893005801  on      ----
Prepaid SMS Intercept Ph1  893006701  on      ----
Intermed GTT Load Sharing  893006901  on      ----
MNP Circ Route Prevent  893007001  on      ----
XGTT Table Expansion  893006101  on      400000
XMAP Table Expansion  893007710  on      3000
```



```

Large System # Links      893005910  on           2000
Routesets                893006401  on           6000
EAGLE5 Product          893007101  off          ----
EAGLE Product           893007201  off          ----
IP7 Product             893007301  off          ----
Network Security Enhance 893009101  off          ----
HC-MIM SLK Capacity     893011801  on            64
MNP                     893016601  on          ----
EAGLE OA&M IP Security   893400001  off          ----
SCCP Conversion         893012001  on          ----
The following features have been temporarily enabled:
Feature Name            Partnum    Status Quantity  Trial Period Left
G-Port Circ Route Prevent 893007001 On         ----  20 days 8 hrs 57 mins
The following features have expired temporary keys:
Feature Name            Part Num
OnOffFeatV             893492401
;
    
```

EAGLE 5 ISS MNP SCCP Service Commands

The `sccp-serv` commands allow for services to be taken online and offline, and for their processing load to be shifted to other designated nodes. These commands also support the assignment of PCs to PC groups used for MNP re-route assignment. The following sections describe three variations: `chg-sccp-serv`, `dlt-sccp-serv`, and `rtrv-sccp-serv`.

Entries using the `chg-sccp-serv` command are provisioned in the SCCP-SERV table, and are shown by the `rtrv-sccp-serv` command output. This reduces the maximum number of entries that the MRN table can contain by the number of entries shown in the `rtrv-sccp-serv` command output. For more information on provisioning MRN tables, refer to the *Database Administration Manual - Global Title Translations* manual.

For further details on the EAGLE 5 ISS MNP SCCP service commands (such as command rules and output format), refer to the *Commands Manual*.

- chg-sccp-serv: Change MNP SCCP Service Command** – The `chg-sccp-serv` command is used to add point codes to an existing service group, or to change the Relative Cost (RC) of existing point codes in a group. SCCP Service groups are organized by service (G-Flex, G-Port, MNP) and point code network type (ANSI, ITU-I, Spare ITU-I, ITU-N, Spare ITU-N, or ITUN-24). Up to seven PCs may be in a network type grouping for service re-route load sharing. This command allows for additions/modifications of up to 4 PCs at once. The point code parameters support the Spare Point Code subtype prefix `s-` for ITU-I and ITU-N point codes. The available parameters follow:

Table 20: chg-sccp-serv Parameters - Class = DATABASE

Parameter	Optional/Mandatory	Range	Description
serv	Mandatory	gport, gflex, mnp	Service
state	Optional	offline, online	Status
gtt	Optional	no, yes	Global Title Translation

Parameter	Optional/ Mandatory	Range	Description
pc1, pca1, pci1, pcn1, pcn241	Optional	Refer to Commands Manual	Post GTT-translated PC
rc1	Optional	00-99	Relative Cost
pc2, pca2, pci2, pcn2, pcn242	Optional	Refer to Commands Manual	Post GTT-translated PC
rc2	Optional	00-99	Relative Cost
pc3, pca3, pci3, pcn3, pcn243	Optional	Refer to Commands Manual	Post GTT-translated PC
rc3	Optional	00-99	Relative Cost
pc4, pca4, pci4, pcn4, pcn244	Optional	Refer to Commands Manual	Post GTT-translated PC
rc4	Optional	00-99	Relative Cost

- **dlt-sccp-serv: DeleteMNP SCCP Service Command** – The `dlt-sccp-serv` command is used to remove entries from the SCCP Service table. A single command may either remove a PC from a group, or remove the entire group. The available parameters follow:

Table 21: dlt-sccp-serv Parameters - Class = DATABASE

Parameter	Optional/ Mandatory	Range	Description
serv	Mandatory	gport, gflex, mnp	Service
pc1, pca1, pci1, pcn1, pcn241	Optional	Refer to Commands Manual	Post GTT-translated PC
pc2, pca2, pci2, pcn2, pcn242	Optional	Refer to Commands Manual	Post GTT-translated PC
pc3, pca3, pci3, pcn3, pcn243	Optional	Refer to Commands Manual	Post GTT-translated PC
pc4, pca4, pci4, pcn4, pcn244	Optional	Refer to Commands Manual	Post GTT-translated PC

Parameter	Optional/ Mandatory	Range	Description
all	Optional	No, Yes	Yes will delete the entire group

- **rtrv-sccp-serv: RetrieveMNPSCCP Service Command** – The `rtrv-sccp-serv` command is used to display the SCCP Service application relationship information maintained by the EAGLE 5 ISS. Point codes are grouped by service. The sample output that follows indicates that the MNP service is online and there are ANSI and ITU-I point codes in the service set.

```

tekelecstp 05-12-20 08:51:53 EST 36.0.0-55.43.0
rtrv-sccp-serv
Command entered at terminal #4.
-----
Service      : GFLEX
State        : Offline
GTT Option   : Yes
-----
Service      : MNP
State        : Online
GTT Option   : Yes
-----
ANSI PC      RC
001-001-001  10
002-002-002  20
003-003-003  30
004-004-004  40
ITU-I PC     RC
2-002-2      10
3-003-3      10
;

```

Maintenance and Measurements User Interface Commands

This section provides a description of the user interface for maintenance and measurements for the Migration feature. The commands that follow allow provisioning, operations, and maintenance activities for Service Module cards.

The command examples shown illustrate the requirements and provide suggestions for suitable names and output. The commands are described in detail in the *Commands Manual*, where the actual parameter names, valid values, and output for the commands are provided.

Commands described here include:

- [rept-stat-sys](#) on page 62
- [rept-stat-sccp](#) on page 63
- [rept-stat-mps](#) on page 64
- [rept-stat-trbl](#) on page 65
- [rept-stat-alm](#) on page 65
- [chg-db](#) on page 66
- [rept-stat-db](#) on page 66
- [inh-card / alw-card](#) on page 66

- [ent-card / rtrv-card / dlt-card](#) on page 66
- [ent-map / chg-map / dlt-map](#) on page 66
- [chg-sid](#) on page 67
- [chg-gpl / act-gpl / rtrv-gpl / rept-stat-gpl / copy-gpl](#) on page 67
- [inh-alm / unhb-alm](#) on page 67
- [rept-ftp-meas](#) on page 67
- [rept-meas](#) on page 68
- [rept-stat-meas](#) on page 68
- [rtrv-measopts / chg-measopts](#) on page 68

rept-stat-sys

This command is used to determine the location of troubles in the MNP subsystem. The display shows the number items that are in service (IS-NR) and the how many are in another state (IS-ANR, OOS-MT, OOS-MT-DSBLD). Refer to the *Commands Manual* for details of this command.

A sample output follows:

```
eagle10605 01-07-25 02:32:46 EST Rel 36.0.0-49.10.0
  MAINTENANCE STATUS REPORT
  Maintenance Baseline established.
  Routing Baseline established.
  SCCP Baseline established.
  ALARMS:      CRIT=    9      MAJR=   10      MINR=    3      INH=    2
  OAM 1113     IS-NR           Active           INH=    0
  OAM 1115     IS-NR           Standby          INH=    0
  LIM CARD    IS-NR=    3      Other=           0      INH=    0
  X25 CARD    IS-NR=    0      Other=           0      INH=    0
  SCCP CARD   IS-NR=    1      Other=           0      INH=    0
  GLS CARD    IS-NR=    0      Other=           0      INH=    0
  SLAN CARD   IS-NR=    0      Other=           0      INH=    0
  EMDC CARD   IS-NR=    2      Other=           0      INH=    0
  MCPM CARD   IS-NR=    2      Other=           0      INH=    0
  IMT         IS-NR=    2      Other=           0
  HMUX        IS-NR=    2      Other=           0      INH=    0
  HIPR        IS-NR=    2      Other=           0      INH=    0
  SLK         IS-NR=    0      Other=           6      INH=    0
  DLK         IS-NR=    0      Other=           0      INH=    0
  LINK SET    IS-NR=    0      Other=           4      INH=    0
  NDC IP LK   IS-NR=    4      Other=           0      INH=    0
  MCPM IP LK  IS-NR=    2      Other=           0      INH=    0
  SS7 DPC     IS-NR=    0      Other=           6      INH=    0
  X25 DPC     IS-NR=    0      Other=           0      INH=    0
  CLUST DPC   IS-NR=    0      Other=           1      INH=    0
  XLIST DPC   IS-NR=    0      Other=           0
  DPC SS      Actv =    0      Other=           0
  SEAS SS     IS-NR=    0      Other=           0
  SEAS X25    IS-NR=    0      Other=           0      INH=    0
  LSMS SS     IS-NR=    0      Other=           0
  LSMS Conn   IS-NR=    0      Other=           0      INH=    0
  NDC SS      IS-NR=    1      Other=           0
  NDC Q.3     IS-NR=    0      Other=           2      INH=    1
  TERMINAL   IS-NR=    2      Other=          14      INH=    0
```

MPS	IS-NR=	2	Other=	0
EIR SS	IS-NR=	1	Other=	0

rept-stat-sccp

The output for the `rept-stat-sccp` command displays the Service Module cards running the VSCCP application and the GTT, G-Flex, INP, EIR, and MNP services executing on those cards. This command also displays any cards that are denied SCCP service. When turned on, the A-Port and IGM features share statistic status with the G-Port feature. If only the G-Port feature is on, the display title is GPORT. If the A-Port or IGM feature are on, with or without the G-Port feature, the display title for the statistic status changes from GPORT to MNP.

The `loc` parameter displays detailed view of the status of SCCP services provided by a specific TSM or Service Module card. Fields are omitted if an associated feature is not turned on.

The `mode` parameter targets the general SCCP traffic performance for both TSM cards running the SCCP application and Service Module cards. The report supplies message rates for group ticket voucher (TVG) performance.

Refer to the *Commands Manual* for details of this command.

The following sample output shows the output of the `rept-stat-sccp` command with the G-Flex, G-Port, INP, and Migration features on. The EIR feature is not enabled, and the `ansigflex` system option is disabled:

```
tekelecstp 000623 13:34:22 EST EAGLE5 36.0.0
  SCCP SUBSYSTEM REPORT IS-NR      Active
    SCCP ALARM STATUS = No Alarms
  INPQ SUBSYSTEM REPORT IS-ANR      Restricted  -----
    ASSUMING MATE'S LOAD
    INPQ: SSN STATUS = Allowed      MATE SSN STATUS = Prohibited
    INPQ ALARM STATUS = No Alarms
  GFLEX SERVICE REPORT IS-ANR      Active
    GFLEX ALARM STATUS = No Alarms
  MNP SERVICE REPORT IS-ANR      Active
    MNP ALARM STATUS = No Alarms
  SCCP Cards Configured=4  Cards IS-NR=2
  System TPS Alarm Threshold = 100% Total Capacity
  System Peak SCCP Load = 3000 TPS
  System Total SCCP Capacity = 5000 TPS
  CARD  VERSION      PST          SST          AST          MSU USAGE  CPU USAGE
  -----
  1212  101-001-000  IS-NR      Active      ALMINH      45%         30%
  1301 P 101-001-000  IS-NR      Active      -----      35%         40%
  1305  -----      OOS-MT      Isolated    -----      0%          0%
  2112  -----      OOS-MT-DSBLD Manual    -----      0%          0%
  -----
  SCCP Service Average MSU Capacity = 40%      Average CPU Capacity = 35%
  AVERAGE CPU USAGE PER SERVICE:
    GTT = 15%  GFLEX = 5%  MNP = 10%
    INPMR = 2%  INPQ = 3%
  TOTAL SERVICE STATISTICS:
  SERVICE      SUCCESS      ERRORS      FAIL          REROUTE\      FORWARD      TOTAL
                RATIO        RATIO        WARNINGS      TO GTT
  GTT:          1995         5           0%            -             -           2000
  GFLEX:        500          1           0%            4             10          515
  MNP:          800          0           0%            2             3           805
  INPMR:        50           5           0%            0             15          70
```

```
INPQ:          499          1          0%          -          -          500
Command Completed.
```

rept-stat-mps

This command is used to display the overall status of the application running on the Multi-Purpose Server (MPS).

If the G-Port, G-Flex, A-Port, or Migration feature is turned on, the status of the GSM and EPAP are displayed.

Refer to the *Commands Manual* for details of this command.

The following sample output follows:

```
Integrat40 00-06-24 10:37:22 EST Rel 36.0.0-49.10.0
          VERSION          PST          SST          AST
EPAP A          027-015-000    IS-NR          Active        -----
  CRITICAL PLATFORM    ALARM DATA = No Alarms
  MAJOR   PLATFORM    ALARM DATA = No Alarms
  MINOR   PLATFORM    ALARM DATA = No Alarms
  CRITICAL APPLICATION ALARM DATA = No Alarms
  MAJOR   APPLICATION ALARM DATA = No Alarms
  MINOR   APPLICATION ALARM DATA = No Alarms
          ALARM STATUS = No Alarms
          VERSION          PST          SST          AST

EPAP B          027-015-000    OOS-MT          Fault         Standby

  CRITICAL PLATFORM    ALARM DATA = No Alarms
  MAJOR   PLATFORM    ALARM DATA = h'0123456789ABCDEF
  MINOR   PLATFORM    ALARM DATA = h'0123456789ABCDEF
  CRITICAL APPLICATION ALARM DATA = No Alarms
  MAJOR   APPLICATION ALARM DATA = h'0123456789ABCDEF
  MINOR   APPLICATION ALARM DATA = No Alarms
          ALARM STATUS = ** 0371 Major Platform Failure(s)

CARD  PST          SST          EIR STAT
1106 P IS-NR          Active      ACT
1201 IS-ANR          Active      SWDL
1205 OOS-MT-DSBLD Manual      -----
1302 OOS-MT          Isolated   -----
1310 IS-ANR          Standby    SWDL

CARD 1106 ALARM STATUS = No Alarms
  DSM PORT A:          ALARM STATUS          = No Alarms
  DSM PORT B:          ALARM STATUS          = No Alarms
CARD 1201 ALARM STATUS = No Alarms
  DSM PORT A:          ALARM STATUS          = ** 0084 IP Connection Unavailable
  DSM PORT B:          ALARM STATUS          = ** 0084 IP Connection Unavailable
CARD 1205 ALARM STATUS = No Alarms
  DSM PORT A:          ALARM STATUS          = ** 0084 IP Connection Unavailable
  DSM PORT B:          ALARM STATUS          = ** 0084 IP Connection Unavailable
CARD 1302 ALARM STATUS = ** 0013 Card is isolated from the system
  DSM PORT A:          ALARM STATUS          = ** 0084 IP Connection Unavailable
  DSM PORT B:          ALARM STATUS          = ** 0084 IP Connection Unavailable
CARD 1310 ALARM STATUS = No Alarms
  DSM PORT A:          ALARM STATUS          = ** 0084 IP Connection Unavailable
  DSM PORT B:          ALARM STATUS          = ** 0084 IP Connection Unavailable
```

```
Command Completed.
;
```

rept-stat-trbl

This command displays a summary of the device trouble notifications. The severity of each alarm is indicated in the output report. Refer to the *Commands Manual* for details of this command.

A sample output follows:

```
eagle10207 02-08-23 10:09:59 EST Rel 35.0.0-49.10.0

  SEQN UAM  AL  DEVICE      ELEMENT      TROUBLE TEXT
0001.0013 **  CARD 1201  GLS          Card is isolated from the system
0002.0013 **  CARD 1211  SS7ANSI     Card is isolated from the system
0011.0013 **  CARD 1101  SCCP        Card is isolated from the system
0013.0013 **  CARD 1103  GLS          Card is isolated from the system
0015.0013 **  CARD 1105  VSCCP       Card is isolated from the system
0018.0013 **  CARD 1115  OAM         Card is isolated from the system
0019.0236 **  SLK 1211,B  ls1134      REPT-LKF: not aligned
0020.0236 **  SLK 1311,A  ls1134567   REPT-LKF: not aligned
0021.0236 **  SLK 1312,A  ls113456    REPT-LKF: not aligned
0022.0236 **  SLK 1313,A  ls11345     REPT-LKF: not aligned
0023.0236 **  SLK 1314,A  ls113467    REPT-LKF: not aligned
0024.0236 **  SLK 1315,A  ls11234567  REPT-LKF: not aligned
0025.0236 **  SLK 1316,A  ls11345678  REPT-LKF: not aligned
0026.0318 **  LSN ls11234567  REPT-LKSTO: link set prohibited
0027.0318 **  LSN ls11345678  REPT-LKSTO: link set prohibited
0028.0318 **  LSN ls1134567   REPT-LKSTO: link set prohibited
0029.0318 **  LSN ls113456    REPT-LKSTO: link set prohibited
0030.0318 **  LSN ls11345     REPT-LKSTO: link set prohibited
0035.0318 **  LSN ls113467    REPT-LKSTO: link set prohibited
0032.0318 **  LSN ls1134     REPT-LKSTO: link set prohibited
0033.0336 **  SCCP SYSTEM    LIM(s) have been denied SCCP service
0034.0349 *C  SEAS SYSTEM    SEAS unavailable
0035.0356 *C  LSMS SYSTEM    LSMS unavailable
0036.0455 *C  EIR SYSTEM     EIR Subsystem is not available
0019.0236 *C  T1PORT 1301,1  REPT-T1F:FAC-T1  LOS failure
Command Completed.
```

rept-stat-alm

This command includes the alarm totals of the MNP subsystem and Service Module card/EPAP IP links. Refer to the *Commands Manual* for details of this command. Here is an example of the command and output.

```
rept-stat-alm
Command Accepted - Processing
eagle10605 99-06-24 23:59:39 EAGLE 35.0.0
rept-stat-alm
Command entered at terminal #10.
;

eagle10605 99-06-24 23:59:39 EAGLE 35.0.0
ALARM  TRANSFER= RMC
ALARM  MODE      CRIT= AUDIBLE      MAJR= AUDIBLE      MINR= AUDIBLE
ALARM  FRAME 1   CRIT= 9          MAJR= 12          MINR= 2
ALARM  FRAME 2   CRIT= 0          MAJR= 0           MINR= 0
ALARM  FRAME 3   CRIT= 0          MAJR= 0           MINR= 0
ALARM  FRAME 4   CRIT= 0          MAJR= 0           MINR= 0
ALARM  FRAME 5   CRIT= 0          MAJR= 0           MINR= 0
ALARM  FRAME 6   CRIT= 0          MAJR= 0           MINR= 0
ALARM  FRAME GPF CRIT= 1          MAJR= 2           MINR= 1
```

```

    PERM. INH. ALARMS  CRIT=  0          MAJR=  0          MINR=  0
    TEMP. INH. ALARMS  CRIT=  0          MAJR=  0          MINR=  0
    ACTIVE ALARMS      CRIT= 10          MAJR= 14          MINR=  3
    TOTAL ALARMS       CRIT= 10          MAJR= 14          MINR=  3
    Command Completed.
;

```

chg-db

The `chg-db` command copies the EAGLE 5 ISS TDM resident MNP database tables during database backup, restore, and repair.

rept-stat-db

This command displays the status information for the EAGLE 5 ISS databases. This includes the level information for each DSM network card, and for the active and standby EPAP databases. It reports database exception status such as corrupted, incoherent, or inconsistent, as well as providing the birthdates and levels. It is enhanced to show the status of the PDB and RTDB databases if the Migration feature is activated. For details about this command, refer to the *Commands Manual*.

inh-card / alw-card

The `inh-card` command is used to change the state of the card from in-service normal (IS-NR) to Out-of-Service Maintenance-Disabled (OOS-MT-DSBLD). A craftsman then can test the DCM/LIM/ACM/Service Module/GPSM-II/MIM card or physically remove it from the shelf.

The `alw-card` command is used to change the card from OOS-MT-DSBLD (out-of-service maintenance-disabled) to IS-NR (in-service normal) if the loading is successful.

Refer to the *Commands Manual* for details of these commands.

ent-card / rtrv-card / dlt-card

The `ent-card` command is used to add a card to the database. The card type and application specifies the function assigned to the card. This command verifies that if the Migration feature is turned on, that the `gpl` that is being provisioned is a VSCCP `gpl`, and if it is, an error is displayed and the `ent-card` command is rejected.

The `rtrv-card` command is used to display the information about a card. This command displays the card type, the application the card is running, the linkset name, the signaling link code, and the ports.

The `dlt-card` command is used to remove a card entry from the system database.

Refer to the *Commands Manual* for details on using these commands.

ent-map / chg-map / dlt-map

These commands are used to provision, remove, change, and report on the mate point code and subsystem number and its attributes. A mate point code defines an adjacent signaling point, which is considered the mated signal transfer point (STP) to the EAGLE 5 ISS.

These commands are updated to allow both ITU-N and ITU-I true point codes to be defined for the same SSN. Refer to the *Commands Manual* for details of these commands.

chg-sid

This command is used to change and report on the self-identification of the EAGLE 5 ISS. The self-identification identifies the EAGLE 5 ISS to other signaling points in the network. The `mnp` CPC type is used for Migration. Refer to the *Commands Manual* for details of this command.

chg-gpl / act-gpl / rtrv-gpl / rept-stat-gpl / copy-gpl

The command-handling and scroll area output for these commands include the VSCCP GPL. Refer to the *Commands Manual* for details of these commands.

Here are samples of the reports produced by these commands.

```

chg-gpl:appl=vscpp:ver=101-3-0
  Command entered at terminal #3.
;
  tekelecstp 99-10-24 06:54:39 EAGLE 35.0.0
  VSCCP upload to 1114 completed
  VSCCP upload to 1116 completed
;
act-gpl:appl=vscpp:ver=101-3-0
  Command entered at terminal #3.
;
  tekelecstp 99-10-24 06:54:39 EAGLE 35.0.0
  VSCCP activate on 1114 completed
  VSCCP activate on 1116 completed
;
rtrv-gpl:appl=vscpp
  Command entered at terminal #3.
;
  tekelecstp 99-10-04 07:01:08 EAGLE 35.0.0
  GPL Auditing ON
  APPL  CARD  RELEASE          APPROVED          TRIAL          REMOVE TRIAL
  VSCCP 1114  101-001-000  101-003-000    101-001-000  101-003-000
  VSCCP 1116  101-001-000  101-003-000    101-003-000  -----
;
rept-stat-gpl:appl=vscpp
  Command entered at terminal #3.
;
  tekelecstp 99-10-04 12:55:50 EAGLE 35.0.0
  APPL  CARD          RUNNING          APPROVED          TRIAL
  VSCCP 1205          101-003-000  ALM              101-003-000  101-003-000
  VSCCP 1211          101-001-000  ALM+             101-003-000  -----
  Command Completed.
;

```

inh-alm / unhb-alm

These commands allow both Port A and Port B to be specified for the `dev=dlk`. This allows alarms to be inhibited on the DSM ports. Refer to the *Commands Manual* for details of these commands.

rept-ftp-meas

This command provides on-demand measurements reporting capabilities. This command initiates generation and FTP transfer of a measurements report from the MCPM to the FTP server. The `enttype=np` supports Migration measurements. The combination of this `enttype` and a report type determines which on-demand Migration report is generated. Refer to the *Commands Manual* for details of this command.

rept-meas

This command includes Migration measurements in the output sent to the EAGLE 5 ISS Terminal. Refer to the *Commands Manual* for details of this command.

rept-stat-meas

Reports the status of the measurements subsystem including card location and state, Alarm level, and Subsystem State. Refer to the *Commands Manual* for details of this command.

rtrv-measopts / chg-measopts

The `chg-measopts` command provides the user with the capability to enable and disable measurement options related to the Measurements Platform. Use this command for the following functions:

- Enable the Measurements Platform collection function
- Turn on or turn off the 15 Minute Measurements collection function
- Enable or disable the automatic generation and FTP transfer of scheduled measurements reports to the FTP server
- Turn on or off the CLLI-based file name option for measurements reports files

The `rtrv-measopts` command displays the current state of the Measurements Platform options. Refer to the *Commands Manual* for details of these commands.

Chapter 4

Migration Feature Activation

Topics:

- [Introduction Page 70](#)
- [Prerequisites Page 71](#)
- [Feature Activation Overview Page 72](#)
- [Feature Activation Procedure Page 77](#)
- [The 1100 TPS/Service Module Card for ITU NP Feature Page 106](#)
- [Activating the E5-SM4G Throughput Capacity Feature Page 112](#)

This chapter describes the prerequisites, considerations, and steps to activate the IS41 GSM Migration (IGM) feature.

Introduction



CAUTION: For an in-service environment, contact the [Customer Care Center](#) on page 3 before continuing to activate the Migration feature. For an environment that is not in-service, continue with this procedure.

The Migration feature cannot be turned on if any of the Service Module cards have less than 4 GB of memory installed. Refer to the *Dimensioning Guide for EPAP Advanced DB Features Technical Reference* for important information on the dimensioning rules and the Service Module card database capacity requirements.

This chapter identifies prerequisites for the Migration (IGM) feature activation procedure, an overview of the activation steps, and a matching number of detailed step descriptions to turn on the IGM feature. The IGM feature activation is performed at the EAGLE 5 ISS.

The IGM feature provides the mobile wireless service provider a way to migrate subscribers from IS-41 to GSM and GSM to IS-41. After the subscriber is marked as migrated, the GSM handset is fully functional and the migrated subscriber has the option whether to continue to receive calls on the IS-41 or GSM handset.

The IGM feature, and other related features, are optional and can be purchased from Tekelec. If you are not sure whether you have purchased a specific feature, contact your Tekelec Sales or Account Representative.



CAUTION:

After a feature has been turned on with the `enable-ctrl-feat` command, the feature cannot be turned off. Because features may overwrite other features or create changes in the database, confirm that you have a license and full technical support from Tekelec before turning on this or any feature. The IGM feature requires a Service Module card running the VSCCP application. Systems with TSM cards running the SCCP application must be upgraded to 4 GB Service Module cards prior to turning on the IGM feature. Refer to the *Dimensioning Guide for EPAP Advanced DB Features Technical Reference* for important information on the dimensioning rules and the Service Module card database capacity requirements. Procedures described in the remainder of this section apply only to the IGM feature and can be performed only if the IGM feature is enabled.

The following features are related to the IGM feature (see your Tekelec Sales or Account Representative for additional information):

- Global Title Translation (GTT)
- Enhanced Global Title Translation (EGTT)
- Variable-Length Global Title Translation (VGTT)
- Mobile Number Portability Circular Route Prevention (MNPCR)

Prerequisites

The IGM feature activation assumes that at least one of the following features is provisioned.

- Global Title Translation (GTT),
- Enhanced Global Title Translation (EGTT)
- Variable-Length Global Title Translation (VGTT)

Refer to the Database Administration Manual - Global Title Translation for provisioning procedures.

The NT serial number (`ent-serial-num`) must be entered and locked before IGM can be enabled and turned-on.

The IGM feature activation assumes that the EPAP software is already configured; refer to *EPAP Administration Manual*, EPAP Software Configuration.

The IGM feature activation assumes that 4 GB Service Module cards to be installed and TSM cards to be removed are identified.

- Note installed Service Module card locations, if any.
- Note available odd-even card slots for Service Module card installation.
- Note installed TSM card locations.
- Note adjacent odd-even TSM card slot number positions for Service Module card replacement.

Note:

TSM cards use one card slot; Service Module cards require two card slots (odd-even). The IGM feature cannot be turned on until the TSM cards running the SCCP application are removed from the system

- Determine Service Module card IP addresses and have them available during the activation procedure.

For in-service systems, schedule Service Module card replacement in maintenance window that allows the reboot of Service Module cards (`init-card:loc=<Service Module card location>`) one at a time.



CAUTION

CAUTION:

When replacing TSM cards with Service Module cards in an in-service environment, initialize one Service Module card at a time. Verify the Service Module card is in the IS-NR state before initializing another Service Module card. This precaution keeps cards in service and prevents an interruption of SCCP services.

For in-service systems with TSM cards running SCCP traffic, one Service Module card must be installed in an available dual-slot (odd-even) location and provisioned for VSCCP prior to inhibiting the TSM card running the SCCP application. The Service Module card running the VSCCP application will take over the SCCP traffic (`alw-card`) after the TSM card running SCCP becomes inhibited

**CAUTION:**

SCCP traffic redundancy will be lost if inhibiting two TSM cards running the SCCP application at a time with only one Service Module card available in their place. Redundancy will be re-established after the two TSM cards running the SCCP application are replaced with a second Service Module card.

For in-service systems that already have the G-Port, G-Flex and/or INP feature enabled, perform only steps [Step 70](#) on page 75 through [Step 90](#) on page 76 to turn on the IGM feature. With the G-Port, G-Flex and/or INP feature enabled, the Service Module cards already contain the RTDB database.

For new systems, Service Module cards may be rebooted all at one time using the `init-card:appl=vsccp` command.

For new systems, GTT, EGTT, and VGTT features may be turned on prior to or immediately following the reboot of all Service Module cards.

Feature Activation Overview

This section provides an overview of the IGM feature activation procedure. The procedure is described in detail in section [Feature Activation Procedure](#) on page 77

The feature activation consists of these sections:

- Configure system for HLR destinations in [Step 1](#) on page 72 through [Step 28](#) on page 74.
- Install Service Module cards in available slots and configure for VSCCP in [Step 29](#) on page 74 through [Step 44](#) on page 74.
- Replace TSM cards configured for SCCP with Service Module cards configured for VSCCP and inhibit/remove any remaining TSM cards running SCCP in [Step 45](#) on page 74 through [Step 69](#) on page 75.
- Turn on and configure the IGM feature in [Step 70](#) on page 75 through [Step 90](#) on page 76.

[Step 1](#) on page 72 through [Step 28](#) on page 74 configure the system to be able to communicate with the system of the HLR database. The route to this database may already be configured. Perform these steps to verify that you have entered all HLR destinations for IGM and make configuration changes as needed.

1. Display and note current system settings for point codes (PCs) and capability point codes (CPCs), destination point codes (DPCs), routes, and linksets using [Step 2](#) on page 72 through [Step 7](#) on page 72.
2. Use `rtrv-sid` command to display current PCs and CPCs.
3. Use `rtrv-dstn` command to display current DPCs.
4. Use `rtrv-rte` command to display current route configurations.
5. Identify PCs and CPCs; determine new PC and CPC to be entered in [Step 9](#) on page 73 .
6. Use `rtrv-stpopts` command to display PC or CPC format if ITU-N network.
7. Use `rtrv-map` command to display PCs of mated applications in database; remove system PC from table if necessary (refer to *Database Administration Manual - Features, Removing A Mated Application*).

**CAUTION:**

Changing the point code of a system requires a system reboot using the `init-sys` command to fully implement the changes. The `init-sys` command causes a complete system reload and should be used only in an environment that is not in service. Using this command ensures the updated self identification information is loaded onto all cards, but does interrupt service.

8. Change PC, CPC, DPC, route, linkset, and LIM card configurations for the HLR database using [Step 9](#) on page 73 through [Step 28](#) on page 74.
9. Use `chg-sid` command to configure PC and CPC by network type.
10. Use `init-sys` command to initialize system if changes were made in [Step 9](#) on page 73 to any `pca/pci/pcn` parameter.

**CAUTION:**

The `init-sys` command causes a complete system reload and should be used only in an environment that is not in service. Using this command ensures the updated self identification information is loaded onto all cards, but does interrupt service.

When the `init-sys` command executes, the system does not retain the manually initiated state (for example, OOS-MT-DSBLD) for the signaling link, card, or terminal. After the command executes, the system attempts to bring all provisioned links, cards, and terminals on line, including those that were previously out of service. You will need to manually put each device back into its previous state after the system is back on line. Print or electronically capture the output of the `rept-stat-slk`, `rept-stat-card`, and `rept-stat-trm` commands for reference prior to issuing the `init-sys` command. To restore a device to its previous state, issue the appropriate inhibit/deactivate command listed in the EAGLE 5 ISS Commands Manual in the Related Commands section for each of the above `rept-stat` commands.

11. Use `rtrv-sid` command to display new PC and CPC.
12. Use `ent-dstn` command to enter DPC for HLR destinations.
13. Use `rtrv-dstn` command to display new HLR DPC.
14. Use `ent-ls` command to enter linkset and assign DPC for HLR destinations.
15. Use `rtrv-ls` command to display new linkset and assigned DPC for HLR destinations.
16. Use `ent-card` command to enter LIM cards into database.
17. Use `rtrv-card` command to display new LIM cards in database.
18. Use `ent-slk` command to assign signaling links to LIM cards.
19. Use `rtrv-slk` command to display new signaling links assigned to LIM cards.
20. Use `ent-rte` command to assign route to new DPC.
21. Use `rtrv-rte` command to display route assigned to new DPC.
22. Use `ent-map` command to enter mated application into database.
23. Use `rtrv-map` command to display new mated application in database.
24. Use `alw-card` command to allow LIM cards.
25. Use `rept-stat-card` command to display status of new LIM cards in database.

26. Use `act-slk` command to activate new signaling links for LIM cards.
27. Use `rept-stat-slk` command to display IS-NR status of signaling links.
28. Use `rtrv-card` command to confirm the new LIM cards and identify Service Module cards running VSCCP application and TSM cards running SCCP application.

**CAUTION****CAUTION:**

When adding Service Module cards in an in-service environment, take care precautions to not interrupt traffic. Before replacing TSM cards running SCCP with Service Module cards, first install a Service Module card in an available odd-even double-slot prior to removing TSM cards running SCCP to make additional room for other Service Module cards.

29. Install and configure Service Module cards in available odd-even slots as needed using [Step 30](#) on page 74 through [Step 44](#) on page 74.
30. Install Service Module cards in available odd-even slots and verify the IMT bus LEDs are illuminated green.
31. Use `ent-card` command to enter Service Module cards as VSCCP cards into database.
32. Use `rtrv-card` command to display new Service Module cards running VSCCP in database.
33. Use `rtrv-ip-host` command to display current IP host information in database.
34. Use `ent-ip-host` command to add host name and IP address for each VSCCP link.
35. Use `rtrv-ip-host` command to display changed IP host information.
36. Use `chg-ip-card` command to set local domain and IP router address if necessary.
37. Use `rtrv-ip-card` command to display changed Service Module card information.
38. Use `rtrv-ip-lnk` command to display current link parameters associated with the Service Module card.
39. Use `chg-ip-lnk` command to set the IP address port and speed associated with the Service Module card.
40. Use `rtrv-ip-lnk` command to display changed link parameters.
41. Use `alw-card` command to boot Service Module cards in TSM emulation mode.
42. Use `rept-stat-card` command to display IS-NR status of Service Module card.
43. Use `pass` command to test presence of EPAP hosts on network.
44. Repeat [Step 30](#) on page 74 through [Step 43](#) on page 74 to add all Service Module cards (N+1) to be installed in available slots.
Go to the next step to start replacing TSM cards.
45. Replace TSM cards with Service Module cards if applicable, and add Service Module cards to database using [Step 46](#) on page 74 through [Step 68](#) on page 75.
46. Use `rtrv-card` command to display TSM cards running the SCCP application in database.
47. Use `rept-stat-card` command to display TSM cards running the SCCP application in IS-NR status.
48. Use `inh-card` command to inhibit TSM cards running the SCCP application.
49. Use `rept-stat-card` command to display OOS-MT-DSBLD status of TSM cards running the SCCP application.
50. Use `dlt-card` command to delete TSM cards running the SCCP application from database.

51. Use `rtrv-card` command to verify removal of TSM cards running the SCCP application from database.
52. Remove first TSM card from shelf.
53. Remove second TSM card from shelf.
54. Install Service Module card in shelf and verify IMT bus LEDs are illuminated green.
55. Use `ent-card` command to enter Service Module card as VSCCP card into database.
56. Use `rtrv-card` command to display new Service Module cards running VSCCP in database.
57. Use `rtrv-ip-host` command to display IP host information in database.
58. Use `ent-ip-host` command to add host name and IP address for VSCCP link.
59. Use `rtrv-ip-host` command to display changed IP host information in database.
60. Use `chg-ip-card` command to set local domain and IP router address if necessary.
61. Use `rtrv-ip-card` command to display changed Service Module card information.
62. Use `rtrv-ip-lnk` command to display current link parameters associated with Service Module card.
63. Use `chg-ip-lnk` command to set the IP address port and speed associated with Service Module card.
64. Use `rtrv-ip-lnk` command to display changed link parameters associated with the Service Module card.
65. Use `alw-card` command to boot Service Module card in TSM emulation mode.
66. Use `rept-stat-card` command to display IS-NR status of Service Module card.
67. Use `pass` command to test presence of EPAP hosts on network.
68. Repeat [Step 46](#) on page 74 through [Step 67](#) on page 75 to replace all adjacent TSM cards identified in the prerequisites and to be replaced with Service Module cards.
69. Repeat [Step 48](#) on page 74 through [Step 52](#) on page 75 to inhibit any remaining TSM cards running the SCCP application and remove them from database and shelf.

Note:

The IGM feature cannot be turned on until TSM cards running the SCCP application are removed from the system.

**CAUTION:**

Contact the [Customer Care Center](#) on page 3 before continuing for assistance in completing this IGM activation procedure. Do not proceed without consulting with the [Customer Care Center](#) on page 3.

70. Turn on IGM feature and configure the feature using [Step 71](#) on page 75 through [Step 90](#) on page 76.
71. Use `enable-ctrl-feat` command to enable the IGM feature.
72. Use `chg-ctrl-feat` command to turn on the IGM feature.

Note:

[Step 75](#) on page 76 through [Step 85](#) on page 76 describe the commands that administer the IGM protocol flow to support:

- IGM SRI ACK and LOCREQ (Ported-out MDNs)
- IGM SRI ACK and LOCREQ (Foreign MDNs not known to be ported)

- IGM Message Relay (Ported-in, non-porting MDNs)
73. Use `enable-ctrl-feat` command to enable the optional MTP MSGS for SCCP Apps feature, if required.
 74. Use `chg-ctrl-feat` command to turn on the optional MTP MSGS for SCCP Apps feature, if required.
 75. Use `chg-stpopts` command to enter default country code (CC) and default network destination code (NDC) if handling non-international numbers.
 76. Use `rtrv-stpopts` command to verify changes of CC and NDC.
 77. Use `chg-gsmopts` command to change GSM options.
 78. Use `rtrv-gsmopts` command to verify changes to GSM options.
 79. Use `chg-is41opts` command to change IS41 options.
 80. Use `rtrv-is41opts` command to verify changes to IS41 options.
 81. Use the `ent-homern` command to enter any Home RNs that are prefixed to DNs for incoming IGM MR messages.
 82. Use `rtrv-homern` command to verify routing number prefixes.
 83. Use the `rtrv-srvsel` command to display the administered service selector combinations.
 84. Use `ent-srvsel` command to enter MNP service selectors.
 85. Use `rtrv-srvsel` command to verify changes to MNP service selectors.

**CAUTION**

CAUTION: When you have an in-service environment and you are replacing TSM cards with Service Module cards, initialize one Service Module card at a time. Verify its return to IS-NR state before initializing another card. This precaution keeps cards in service and precludes an interruption of SCCP services.

86. Use `init-card:loc= <Service Module card>` command to load RTDB, OAM, GPL, and GTT data to Service Module card.
87. Use `rept-stat-card` command to display IS-NR status of Service Module card running VSCCP.
88. Repeat [Step 86](#) on page 76 and [Step 89](#) on page 76 to reboot each Service Module card.

Note:

After the IGM feature is turned on, always boot the Service Module cards with the `init-card:loc=<Service Module card location>` command.

89. Use `chg-sccp-serv:serv=mnp:state=online` to set the MNP service to online.
90. Confirm success of activation procedure with `rept-stat-sccp`, `rept-stat-mps`, and `rept-stat-db:display=all` commands.

EPAP can now administer Migration entity objects and IGM subscribers. For the details about performing these actions, refer to the EPAP Administration Manual.

The detailed IGM activation procedure is described next.

Feature Activation Procedure



CAUTION:

Refer to the *Dimensioning Guide for EPAP Advanced DB Features Technical Reference* for important information on the dimensioning rules and the DSM database capacity requirements.

1. Before changing a true point code (PC) and adding a capability point code (CPC) for the IGM feature, display the current values of the self-identification configuration (shown in [Step 2](#) on page 77), the destination point codes (DPCs) (shown in [Step 3](#) on page 77), and the routes and linksets assigned to the DPCs (shown in [Step 4](#) on page 78).

The IGM feature applies to ITU-I (international), ITU-N (national), and ITU-N ANSI networks.

2. Display the current self identification of the system (PC and CPC) using the `rtrv-sid` command.

This is an example of the possible output:

```
tklc1081301 06-10-05 11:43:02 EST EAGLE5 36.0.0
PCA          PCI          PCN          CLLI          PCTYPE
006-010-006 5-010-5      5-010-5-aa   tklc1081301  ANSI
CPCA (MNP)
006-012-000
CPCI (MNP)
5-012-0
CPCN (MNP)
5-012-0-aa      5-012-0-ms
CPCN24 (MNP)
006-012-000
;
```

This example retrieved all capability point codes with `cpctype=mnmp`.

3. Display the current destination point codes in the destination point code table (`dpci/dpcn/dpc/dpca`) using the `rtrv-dstn` command.

This is an example of the possible output:

```
tklc1191001 06-05-11 08:02:13 EST EAGLE5 36.0.0
DPCA          CLLI          BEI  ELEI  ALIASI          ALIASN/N24  DOMAIN
008-030-008  stpa038a     no   ---  -----  -----  SS7
006-010-006  stpc016a     no   ---  -----  -----  SS7
042-052-012  tklca4212a2 no   ---  4-075-2  4-075-2-aa  SS7
042-054-012  tklca4212a4 no   ---  4-077-2  4-077-2-aa  SS7
042-056-012  tklca4212a6 no   ---  4-079-2  4-079-2-aa  SS7
```

```

255-**-*      mobrnrcr001a --- --- -----
255-225-*      mobrnrcr002a no  no -----
225-225-199    mobrrrte001a no  ---   7-255-7       7-255-7-aa  SS7

DPCI          CLLI          BEI  ELEI   ALIASA          ALIASN/N24  DOMAIN
7-030-7       stpa037i      no  --- -----
s-7-030-7     -----      no  --- -----
5-010-5       stpc015i      no  --- -----

DPCN24        CLLI          BEI  ELEI   ALIASA          ALIASI       DOMAIN
008-030-008   stpa038c      no  --- -----
006-010-006   stpc016c      no  --- -----
006-090-006   stpd096c      no  --- -----
006-132-002   sc3a040i00    no  --- -----

DESTINATION ENTRIES ALLOCATED:  6000
FULL DPC(s):                    664
EXCEPTION DPC(s):               5272
NETWORK DPC(s):                 1
CLUSTER DPC(s):                 1
TOTAL DPC(s):                   5938
CAPACITY (% FULL):              99%
ALIASES ALLOCATED:              12000
ALIASES USED:                   1185
CAPACITY (% FULL):              10%
X-LIST ENTRIES ALLOCATED:      500

```

The example shows a truncated display of all provisioned destinations.

4. Display the current route configuration using the `rtrv-rte` command.

This is an example of the possible output:

```

rlghncxa03w 01-03-07 11:43:04 GMT EAGLE 36.0.0
DPCA          ALIASI          ALIASN          CLLI          LSN          RC  APCA
-----
DPCI          ALIASN          ALIASA          CLLI          LSN          RC  APCI
2-100-1       121111         -----      idp1         ls100001     10  1-234-5
              121111         -----      idp1         ls100002     10  1-234-6
              121111         -----      idp1         ls100003     20  1-234-7
              121111         -----      idp1         ls100004     30  1-234-1
              121111         -----      idp1         ls100005     40  1-234-2
              121111         -----      idp1         ls100006     50  1-234-3

DPCN          ALIASA          ALIASI          CLLI          LSN          RC  APCN
21111         -----      0-001-1       ndp1         ls200001     10  11111
              -----      0-001-1       ndp1         ls200002     10  11112
              -----      0-001-1       ndp1         ls200003     20  11113
              -----      0-001-1       ndp1         ls200004     30  11114
              -----      0-001-1       ndp1         ls200005     40  11115
              -----      0-001-1       ndp1         ls200006     50  11116

```

- If the system's point code (pci/pcn) or capability point code (cpci/cpcn) to be configured in this procedure is shown in [Step 2](#) on page 77, [Step 3](#) on page 77, or [Step 4](#) on page 78, choose another point code to configure with this procedure ([Step 9](#) on page 80).
- If configuring the system point code or capability point code (pcn or cpcn) of an ITU-N network, view the current value of the ITU-N point code format. Otherwise continue with [Step 7](#) on page 79.

Enter the `rtrv-stpopts` command and specify the ITU-N point code format option `npcfmt i`. The `npcfmt i` option identifies how the ITU-N point code is entered into the database and how it is displayed in any outputs. The value is shown in the `NPCFMTI` field.

This is an example of the possible output:

```
rlghncxa03w 01-03-17 16:02:05 GMT EAGLE 36.0.0
STP OPTIONS
-----
MTPT31CTL          1
MTPLTI             yes
MTPLTCTDPCQ       3
MTPLTST           10000
MTPXLQ             500
MTPXLET            0100
MTPXLOT            90%
MTPDPCQ           1750
TFATFRPR          1000
MTPRSI             yes
MTPRSIT            5000
MTPLPRST           yes
MTPT10ALT          30000
SLSCNV             perlS
UIMRD              yes
CRITALMINH         no
DISPACTALMS        no
NPCFMTI            4-4-4-2
DEFCC              49
DEFNDC             177
DSMAUD             on
```

If you wish to change the format of the ITU-N point code, go to section "ITU National Point Code Formats" in the EAGLE 5 ISS Database Administration Manual - SS7. Then continue with [Step 7](#) on page 79.

- Display the mated applications in the database using the `rtrv-map` command.

These are examples of possible output:

```
PCN          SSN  RC  MPCN          MSSN MATERC SRM  MRC  GRP  NAME
11111         5  10  12347         5    20
rlghncxa03w 01-03-07 11:43:04 GMT EAGLE 36.0.0
PCI          SSN  RC  MPCN          MSSN MATERC SRM  MRC  GRP  NAME
2-100-1      5  20  3-200-1      250   99  ---  ---  abcdefgh
```

If the system's point code is shown in the `rtrv-map` command output (in the PCA, PCI, PCN, MPCA, MPCN, or MPCN fields), remove the system's point code from the mated application table. Refer to procedure "Removing a Mated Application" in the EAGLE 5 ISS Database Administration Manual - Features.

If the system's point code or capability point code is a destination point code of a route, select a point code that is not the destination point code of a route (see output of the `rtrv-rte` command in [Step 4](#) on page 78 `rtrv-dstn` command in [Step 3](#) on page 77).

8. Change PC, CPC, DPC, route, linkset, and LIM card configurations for the HLR database using [Step 9](#) on page 80 through [Step 28](#) on page 87.



CAUTION

CAUTION:

Changing a system's point code requires a system reboot using the `init-sys` command to fully implement the changes. The `init-sys` command causes a complete system reload and should be used only in an environment that is not in service. Using this command ensures the updated self identification information is loaded onto all cards but does interrupt service.

Note: The `init-sys` command must be entered twice within 30 seconds for the system to re-initialize. If the `init-sys` command is not executed twice within 30 seconds, the attempt to re-initialize the system is aborted.

9. Configure the system's point code (`pci/pcn`) and capability point code (`cpci/cpcn`) by network type using the `chg-sid` command.

For example, enter one of these commands:

```
chg-sid:pci=1-100-2:cpci=1-102-1
```

```
chg-sid:pcn=11112:cpcn=11125
```

where:

`pci/pcn` – The point code used to uniquely identify the system.

`cpci/cpcn` – The point code used by the SS7 protocol to identify a group of functionally related EAGLE 5 ISSs in the signaling network to which the EAGLE 5 ISS belongs.

After successful completion of this command, the system returns the following output:

```
rlghncxa03w 01-03-07 00:57:31 GMT EAGLE 36.0.0
CHG-SID: MASP A - COMPLTD
```

When any of the `pci/pcn` parameters have changed, the system needs to be reinitialized. The following caution message is displayed:

CAUTION: SYSTEM SITE ID HAS BEEN CHANGED, MANUAL RE-INITIALIZATION IS NEEDED



CAUTION

CAUTION:

The `init-sys` command causes a complete system reload and should be used only in an environment that is not in service. Using this command ensures the updated self identification information is loaded onto all cards, but does interrupt service.

When the `init-sys` command executes, the system does not retain the manually initiated state (for example, OOS-MT-DSBLD) for the signaling link, card, or terminal. After the command executes, the system attempts to bring all provisioned links, cards, and terminals on line, including those that were previously out of service. You will need to manually put each device back into its previous state after the system is back on line. Print or electronically capture the output of the `rept-stat-slk`, `rept-stat-card`, and `rept-stat-trm` commands for

reference prior to issuing the `init-sys` command. To restore a device to its previous state, issue the appropriate inhibit/deactivate command listed in the EAGLE 5 ISS Commands Manual in the Related Commands section for each of the above `rept-stat` commands.

- Reinitialize the system by entering the `init-sys` command if changes were made in [Step 9](#) on page 80 to any `pca/pci/pcn` parameter.

When the `init-sys` command is first entered, this message should appear.

```
rlghncxa03w 01-03-07 00:57:31 GMT EAGLE 36.0.0
CAUTION: This command causes a complete system reload, and
will result in traffic loss.
Re-enter command within 30 seconds to confirm.
```

When the `init-sys` command is re-entered within the 30 second time limit, this message should appear.

```
rlghncxa03w 01-03-07 00:57:31 GMT EAGLE 36.0.0
Init System command issued at terminal #3
```

From the time that the `init-sys` command is accepted, you must wait approximately two minutes before you can perform [Step 11](#) on page 81 (logging into the system). If the terminal is in the VT-100/VT-320 mode, the terminal display will be refreshed with non-zero alarm counts. During this two-minute interval, an intermediate screen refresh occurs, which is caused by the MASP's role change from active to standby and from standby to active. This screen refresh is typically a partial refresh and the alarm indicators are set to zero. If you are logged into the system in the KSR mode, the only response you will receive of being able to log into the system is the message 'UAM 0009, MASP became active'. UAM 0009 could be issued twice due to a possible transient MASP role change (switching from active to standby). Following the execution of the `init-sys` command, the MASP that was active before the `init-sys` command was entered will be the active MASP again when the system has finished reinitializing.

- Verify the SID changes using the `rtrv-sid` command.

This is an example of the possible output:

```
durhncxa03w 01-03-07 00:57:31 GMT EAGLE 36.0.0
PCA          PCI          PCN          CLLI          PCTYPE
-----          1-100-1          11111          rlghncxa03w  OTHER

CPCA
-----

CPCI
1-101-1          1-101-2          1-101-3          1-101-4
1-102-1

CPCN
11121          11122          11123          11124
11125
```

- Enter a destination point code for the HLR location in the Destination Point Code table by network type using the `ent-dstn` command.

For example, enter one of these commands:

```
ent-dstn:dpci=2-100-2
ent-dstn:dpcn=21112
```

where:

dpc/dpca/dpci/dpcn – The destination point code being added to the database

The system returns this message:

```
rlghncxa03w 01-03-17 15:35:05 GMT EAGLE 36.0.0
Destination table is (40 of 4000) 1% full
ENT-DSTN: MASP A - COMPLTD
```

- Verify the changes using the `rtrv-dstn` command and specifying the DPC that was entered in [Step 12](#) on page 81.

For example, enter one of these commands:

```
rtrv-dstn:dpci=2-100-2
```

```
rtrv-dstn:dpcn=21112
```

This is an example of the possible output for DPCI s.

```
rtrv-dstn:dpci=2-100-2
RLGHNCXA03W 01-03-30 21:16:37 GMT EAGLE 36.0.0
DPCI          CLLI          BEI  ELEI  ALIASA          ALIASN          DOMAIN
2-100-2      -----          no  ---  -----          21112          SS7
              SPC              NCAI
              -----          no
Destination table is (20 of 2000) 1% full
```

This is an example of the possible output for DPCNs.

```
rtrv-dstn:dpcn=21112
RLGHNCXA03W 01-03-30 21:16:37 GMT EAGLE 36.0.0
DPCN          CLLI          BEI  ELEI  ALIASA          ALIASI  DOMAIN
21112        -----          no  ---  -----          2-100-2  SS7
              SPC              NCAI
              -----          no
Destination table is (20 of 2000) 1% full
```

- Enter a linkset with the `ent-ls` command, and assign it to the destination point code by network type.

For example, enter one of these commands:

```
ent-ls:lsn=ls400001:apci=2-200-2:lst=c
```

```
ent-ls:lsn=ls500001:apcn=21122:lst=c
```

where:

lsn – The name of the linkset

apc/apca/apci/apcn – Adjacent point code – the point code identifying the node that is next to the system

lst – The linkset type of the specified linkset

After successful completion of this command, the system returns the following message:

```
RLGHNCXA03W 01-03-17 16:23:21 GMT EAGLE 36.0.0
Link set table is ( 114 of 1024) 12% full
ENT-LS: MASP A - COMPLTD
```

- Verify the changes using the `rtrv-ls` command and specifying the linkset name.

For example, enter one of these commands:

```
rtrv-ls:lsn=ls400001
```

```
rtrv-ls:lsn=ls500001
```

For lsn400001, the system returns output similar to the following:

```

                L3T  SLT
LSN          APCI (SS7)  SCRNL  SET  SET BEI LST LNKS GWSA GWSM GWSL SLSCI NIS
ls400001 2-200-2
  scr1 1 2 no a 0
    on  off  off no  on
CLLI          TFATCABMLQ  MTPRSE  ASL8
RLGHNCXA03W  1          no      no
                L2T      L1          PCR PCR
LOC  PORT SLC TYPE  SET BPS  MODE TSET ECM  N1  N2

Link set table is (114 of 1024) 12% full

```

For lsn500001, the system returns output similar to the following:

```

                L3T  SLT
LSN          APCN (SS7)  SCRNL  SET  SET BEI LST LNKS GWSA GWSM GWSL SLSCI
NIS ls500001 21122
  scr3 1 2 no a 0
    on  off  off no  on
CLLI          TFATCABMLQ  MTPRSE  ASL8
RLGHNCXA03W  1          no      no
                L2T      L1          PCR PCR
LOC  PORT SLC TYPE  SET BPS  MODE TSET ECM  N1  N2

Link set table is (114 of 1024) 12% full

```

16. Add the LIM cards to the database using the `ent-card` command.

For this example, enter these commands:

```
ent-card:loc=1105:type=limocu:appl=ccs7itu
```

```
ent-card:loc=1106:type=limocu:appl=ccs7itu
```

where:

`loc` - specifies the slot number for the card.

`type` - specifies that the card is a LIMOCU card.

`appl` - specifies that the application is CCS7ITU.

After successful completion of this command, the system returns the following message:

```

RLGHNCXA03W 01-03-12 09:12:36 GMT EAGLE 36.0.0
ENT-CARD: MASP A - COMPLTD

```

17. Verify the changes using the `rtrv-card` command with the card location specified.

For this example, enter these commands:

```
rtrv-card:loc=1105
```

```
rtrv-card:loc=1106
```

These are examples of the possible output:

```

RLGHNCXA03W 01-03-30 09:12:36 GMT EAGLE 36.0.0
CARD  TYPE          APPL          PORT A LSET (SLC)  PORT B LSET (SLC)  1105

```

```

LIMOCU      CCS7ITU      -----      (--)      -----      (--)
RLGHNCXA03W 01-03-30 09:12:36 GMT EAGLE 36.0.0
CARD  TYPE          APPL          PORT A LSET (SLC)  PORT B LSET (SLC) 1106
LIMOCU      CCS7ITU      -----      (--)      -----      (--)

```

18. Assign signaling links to the LIM cards using the `ent-slk` command.

For example, enter these commands:

```
ent-slk:loc=1105:port=a:lsn=ls400001:slc=0:l2tset=1
```

```
ent-slk:loc=1106:port=a:lsn=ls500001:slc=0:l2tset=1
```

where:

`loc` – The card location of the LIM that the SS7 signaling link will be assigned to.

`port` – The port on the card specified in the `loc` parameter.

`lsn` – The name of the linkset that will contain the signaling link.

`slc` – The signaling link code. The `slc` must be unique within the linkset. It must be the same at both the system location and the distant node.

`l2tset` – The level 2 timer set table. A signaling link may be assigned to any of the twenty tables.

After successful completion of this command, the system returns the following message:

```

RLGHNCXA03W 01-03-07 08:29:03 GMT EAGLE 36.0.0
ENT-SLK: MASP A - COMPLTD

```

Signaling links are the only elements in the database directly supported by a hardware device. When a link is added to a linkset, the link remains in the state OOS-MT-DSBLD (out of service maintenance disabled) until it is activated; see [Step 26](#) on page 87.

19. Verify the changes using the `rtrv-slk` command, specifying the card location and port of the signaling link entered in [Step 18](#) on page 84.

```
rtrv-slk:loc=1105:port=a
```

```
rtrv-slk:loc=1106:port=a
```

This is an example of the possible output.

```

RLGHNCXA03W 01-03-19 21:16:37 GMT EAGLE 36.0.0
LOC  PORT LSN          SLC TYPE          L2T          L1          PCR  PCR
A 1s400001 0 LIMOCU          1 56000 --- --- BASIC --- ---
RLGHNCXA03W 01-03-19 21:16:37 GMT EAGLE 36.0.0
LOC  PORT LSN          SLC TYPE          L2T          L1          PCR  PCR
A 1s500001 0 LIMOCU          1 56000 --- --- BASIC --- ---

```

20. Add a route for the new DPC by network type using the `ent-rte` command.

For example, enter one of these commands:

```
ent-rte:dpci=2-100-2:lsn=ls400001:rc=10
```

```
ent-rte:dpcn=21112:lsn=ls500001:rc=10
```

where:

`dpc/dpca/dpci/dpcn` – Destination point code of the node that the traffic is bound for
`lsn` – The name of the linkset that will carry the traffic bound for the node specified by the destination point code.

`rc` – The relative cost (priority) for this route.

After successful completion of this command, the system returns the following message:

```
RLGHNCXA03W 01-03-07 08:28:30 GMT EAGLE 36.0.0
ENT-RTE: MASP A - COMPLTD
```

21. Verify the changes using the `rtrv-rte` command and specifying the destination point code of the route.

This is an example of the possible output:

```
rlghncxa03w 01-03-07 11:43:04 GMT EAGLE 36.0.0
DPCA          ALIASI          ALIASN          CLLI          LSN          RC APCA          DPCI
-----
2-100-1          121111          240-111-111  idp1          ls100001  10 1-234-5
                121111          240-111-111  idp1          ls100002  10 1-234-6
                121111          240-111-111  idp1          ls100003  20 1-234-7
                121111          240-111-111  idp1          ls100004  30 1-234-1
                121111          240-111-111  idp1          ls100005  40 1-234-2
                121111          240-111-111  idp1          ls100006  50 1-234-3  2-100-2
                121111          240-111-111  idp1          ls400001
10 1-200-2 DPCN
                ALIASA          ALIASI          CLLI          LSN          RC APCN
21111          011-222-111  0-001-1          ndp1          ls200001  10 11111
                011-222-111  0-001-1          ndp1          ls200002  10 11112
                011-222-111  0-001-1          ndp1          ls200003  20 11113
                011-222-111  0-001-1          ndp1          ls200004  30 11114
                011-222-111  0-001-1          ndp1          ls200005  40 11115
                011-222-111  0-001-1          ndp1          ls200006  50 11116  21112
                011-222-111  0-001-1          ndp1          ls500001
10 11122
```

22. Add a mated application to the database by network type using the `ent-map` command.

For this example, enter this command:

```
ent-map:pci=2-100-1:ssn=12:rc=20:mpci=3-200-1:mssn=50
:materc=99:grp=grp03
```

```
ent-map:pcn=11112:ssn=12:rc=10:mpcn=11114:mssn=250:materc=99 :grp=grp07
```

where:

`pci/pcn` – The point code of the primary signaling point that is to receive the message.

`ssn` – Subsystem number – the subsystem address of the primary point code that is to receive the message.

`rc` – The relative cost

`mpc/mpca/mpci/mpcn` – The point code of the backup signaling point that is to receive the message.

`mssn` – Mate subsystem number – the subsystem address of the backup point code that is to receive the message.

`materc` – Mate relative cost.

grp – The name of the concerned signaling point code group that contains the point codes that should be notified of the subsystem status. This parameter applies to both RPCs/SSNs.

When each of these commands have successfully completed, this message should appear.

```
RLGHNCXA03W 01-03-07 00:28:31 GMT EAGLE 36.0.0
ENT-MAP: MASP A - COMPLTD
```

23. Verify the changes using the `rtrv-map` command.

These are examples of possible output.

```
rlghncxa03w 01-03-07 11:43:04 GMT EAGLE 36.0.0
PCN          SSN RC  MPCN          MSSN MATERC SRM MRC GRP NAME
11111        5  20 12347          250      99 --- --- GRP07
11112        12 0  12347          250      99 --- --- GRP07

rlghncxa03w 01-03-07 11:43:04 GMT EAGLE 36.0.0
PCI          SSN RC  MPCN          MSSN MATERC SRM MRC GRP NAME
1-100-1      5  0  3-200-1       250      99 --- --- GRP03
2-100-1      12 20 3-200-1       50       99 --- --- GRP03
```

24. Allow the LIM cards that were entered in [Step 16](#) on page 83 by using the `alw-card` command.

For example, enter these commands:

```
alw-card:loc=1105
```

```
alw-card:loc=1106
```

This message appears:

```
RLGHNCXA03W 01-03-30 21:20:37 GMT EAGLE 36.0.0
Card has been allowed.
```

25. Verify the in-service normal (IS-NR) status of the cards using the `rept-stat-card` command.

This is an example of the possible output:

```
RLGHNCXA03W 01-03-27 16:43:42 GMT EAGLE 36.0.0
CARD VERSION          TYPE  APPL  PST          SST          AST 1101
100-000-00003-000 ASM SCCC IS-NR
Active --- 1102 100-000-00003-000 ASM SCCC IS-NR
Active ---
1103 100-000-00003-000 ACMENET STPLAN IS-NR Active ---
1104 100-000-00003-000 ACMENET GLS IS-NR Active --- 1105
100-000-00003-000 LIMOCU CCS7ITU IS-NR
Active --- 1106 100-000-00003-000 LIMOCU CCS7ITU IS-NR
Active ---
1113 100-000-00002-000 MCAP OAM IS-NR Active ---
1114 100-000-00002-000 TDM IS-NR Active ---
1115 100-000-00002-000 MCAP OAM IS-NR Active ---
1116 100-000-00002-000 TDM IS-NR Active ---
1117 100-000-00002-000 MDAL IS-NR Active ---
1201 100-000-00003-000 LIMDS0 SS7ANSI IS-NR Active ---
1202 100-000-00002-000 LIMV35 SS7GX25 IS-NR Active ---
1203 100-000-00003-000 LIMV35 SS7ANSI IS-NR Active ---
1204 100-000-00003-000 LIMATM ATMANSI IS-NR Active ---
1205 100-000-00001-000 DCM IPLIM IS-NR Active ---
1207 100-000-00001-000 DCM SS7IPGW IS-NR Active ---
1303 100-000-00001-000 DCM IPLIM IS-NR Active ---
1305 100-000-00001-000 DCM SS7IPGW IS-NR Active ---
```

26. Activate the signaling links entered in [Step 18](#) on page 84 using the `act-slk` command.

For example, enter these commands

```
act-slk:loc=1105:port=a
act-slk:loc=1106:port=a
```

The link changes its state from OOS-MT-DSBLD (out-of-service maintenance-disabled) to IS-NR (in-service normal). The output confirms the activation.

```
RLGHNCXA03W 01-03-07 11:11:28 GMT EAGLE 36.0.0
Activate Link message sent to card
```

27. Verify the in-service normal (IS-NR) status of the signaling link using the `rept-stat-slk` command.

For example, enter these commands:

```
rept-stat-slk:loc=1105
rept-stat-slk:loc=1106
```

This message should appear

```
RLGHNCXA03W 01-03-30 21:16:37 GMT EAGLE 36.0.0
SLK      LSN      CLLI      PST      SST      AST 1105,A 1s400001
----- IS-NR  Avail  ----
Command Completed.

RLGHNCXA03W 01-03-30 21:16:37 GMT EAGLE 36.0.0
SLK      LSN      CLLI      PST      SST      AST 1106,A 1s500001
----- IS-NR  Avail  ----
Command Completed
```

28. Display the new LIM cards in the database using the `rtrv-card` command.

This is an example of the possible output:

```
RLGHNCXA03W 01-03-15 16:34:56 GMT EAGLE 36.0.0
CARD  TYPE      APPL      PORT A LSET (SLC)  PORT B LSET (SLC)
1101  ASM         SCCP      -----  (--)  -----  (--)
1102  ASM         SCCP      -----  (--)  -----  (--)
1103  ACMENET     STPLAN   -----  (--)  -----  (--)
1104  ACMENET     GLS       -----  (--)  -----  (--) 1105 LIMOCU
CCS7ITU 1s400001
( 00
) -----  (--) 1106 LIMOCU CCS7ITU 1s500001
( 00
) -----  (--)
1113  MCAP        OAM
1114  TDM
1115  MCAP        OAM
1116  TDM
1117  MDAL
1201  LIMDS0     SS7ANSI   lsn1      (00)    lsn2      (01)
1202  LIMV35     SS7GX25   lsngwy    (00)    -----  (--)
1203  LIMV35     SS7ANSI   lsn2      (00)    lsn1      (01)
1204  LIMATM     ATMANSI   atmgwy    (00)    -----  (--)
1205  DCM        IPLIM     ipgwy1    (00)    ipgwy3    (01)
1207  DCM        SS7IPGW   ipgwy2    (00)    -----  (--)
```

1303	DCM	IPLIM	ipgwy1	(00)	ipgwy3	(01)
1305	DCM	SS7IPGW	ipgwy4	(00)	-----	(--)

Determine a location where the dual-slot Service Module card can be inserted. The output shows slots 1107 and 1108 are not occupied. Also determine adjacent (odd-even slots) TSM cards running the SCCP application for later TSM card replacements.

29. Install and configure Service Module card(s) as needed in available odd-even slots using steps 30 through 44.

For our example, install a Service Module card in slots 1107 and 1108.

30. Install the Service Module card in slots 1107 and 1108.

The Service Module card requires two slots and must be installed in an odd slot with an adjacent empty even slot on its right side.

- a) Open the ejector levers on the Service Module card.

Carefully align the card's edges with the top and bottom card guides. Then push the card along the length of the card guides until the rear connectors on the card engage the mating connectors on the target shelf backplane.

- b) Press the left edge of the card's faceplate using constant pressure until you feel the card's progress cease.



warning: Do not impact the faceplate in order to mate the connectors. Any impact to the card's faceplate can damage the faceplate, the pins, or the connectors.

- c) Push in the top and bottom inject/eject clamps. This locks the card in place and ensures a strong connection with the pins on the target shelf backplane.

Figure 9: Push in Inject/Eject Clamp



Push in the inject/eject clamps to lock the card in place.

- d) Verify that both IMT bus LEDs are green.
- e) Install the cabling required to connect the Service Module card to the MPS. Refer to the Installation Manual for details

31. Add the Service Module card to the database and configure it as Service Module card using the `ent-card` command.

For this example, enter this command.

```
ent-card:loc=1107:type=dsm:appl=vsccp
```

where:

`loc` - specifies the slot number for the card. The slot number must be an odd number.

`type` - specifies that the card is a DSM card.

`appl` - specifies that the application is VSCCP.

After successful completion of this command, the system returns the following message:

```
RLGHNCXA03W 01-03-12 09:12:36 GMT EAGLE 36.0.0
ENT-CARD: MASP A - COMPLTD
```

32. Verify the VSCCP card using the `rtrv-card` command with the card location specified.

For this example, enter this command:

```
rtrv-card:loc=1107
```

This is an example of the possible output:

```
RLGHNCXA03W 01-03-30 09:12:36 GMT EAGLE 36.0.0
CARD   TYPE           APPL           PORT A LSET (SLC)   PORT B LSET (SLC) 1107 DSM
VSCCP
-----  (--)          -----  (--)
```

33. Display current link parameters associated with the Service Module card in the database by entering the `rtrv-ip-lnk` command.

This is an example of the possible output:

```
RLGHNCXA03W 01-03-30 21:17:37 GMT EAGLE 36.0.0

IPADDR      HOST
192.1.1.32   KC_HLR2
192.1.1.50   DN_MSC1
192.1.1.52   DN_MSC2
```

34. Enter the IP address port and speed associated with the Service Module card in the database using the `chg-ip-lnk` command.

For this example, enter these commands:

```
chg-ip-lnk:loc=1101:port=a:duplex=half:ipaddr=192.168.122.2
:mactype=dix:speed=100:mcast=yes:submask=255.255.255.0
```

```
chg-ip-lnk:loc=1101:port=b:duplex=half:ipaddr=192.168.123.2
```

```
:mactype=dix:speed=10:mcast=yes:submask=255.255.255.0
```

where:

`:loc` – The card location of the card within the EAGLE 5 ISS.

`:port` – The port ID. The `port` parameter of the `chg-ip-lnk` command specifies the physical interface of the Service Module card.

: `ipaddr` – IP address assigned to the port. This is a TCP/IP address expressed in standard “dot notation.” IP addresses consist of the system’s network number and the machine’s unique host number.

: `duplex` – This is the mode of operation of the interface.

: `speed` – This is interface bandwidth in megabits per second. The speed is either 100 Mbps for main DSM network or 10 Mbps for backup DSM network.

: `mactype` – This is the Media Access Control Type of the interface. Specify `dix` for the Digital/Inter/Xerox *de facto* standard for the Ethernet.

: `mcast` – This is the Multicast Control of the interface.

: `submask` – The subnet mask of the IP interface, in the form of an IP address with a restricted range of values.

When this command has successfully completed, the following message should appear.

```
RLGHNCXA03W 01-10-30 21:18:37 GMT EAGLE 37.0.0
CHG-IP-LNK: MASP A - COMPLTD
```

35. Verify the IP address port and speed associated with the Service Module card in the database by entering the `rtrv-ip-lnk` command.

This is an example of the possible output.

```
RLGHNCXA03W 01-03-30 21:14:37 GMT EAGLE 37.0.0
LOC PORT IPADDR SUBMASK DUPLEX SPEED MACTYPE AUTO MCAST
1107 A 192.168.122.1 255.255.255.0 HALF 100 DIX NO YES
1107 B 192.168.123.1 255.255.255.0 HALF 10 DIX NO YES
```

36. Display the current IP host information in the database by entering the `rtrv-ip-host` command.

```
RLGHNCXA03W 01-03-30 21:14:37 GMT EAGLE 37.0.0
LOC PORT IPADDR SUBMASK DUPLEX SPEED MACTYPE AUTO MCAST
1107 A 192.168.122.1 255.255.255.0 HALF 100 DIX NO YES
1107 B 192.168.123.1 255.255.255.0 HALF 10 DIX NO YES
```

37. Add the host name and IP address for each VSCCP link using the `ent-ip-host` command.

For example, enter these commands:

```
ent-ip-host:host=vsccp_1107_a:ipaddr=192.168.122.1
ent-ip-host:host=vsccp_1107_b:ipaddr=192.168.123.1
```

where:

:`host` - specifies the host name. Each VSCCP link must be specified separately.

:`ipaddr` - specifies the IP network address for each EPAP. The first three octets of the IP address must be the same as MPS A and B ports, respectively. The fourth octet identifies the DSM card and must have a unique octet identifier for the card’s IP address; we recommend numbering the Service Module cards sequentially, using values 1 to 25. (This example shows the assignment of the first Service Module card.)

After successful completion of this command, the system returns the following message:

```
RLGHNCXA03W 01-03-30 21:18:37 GMT EAGLE 36.0.0
ENT-IP-HOST: MASP A - COMPLTD
```

38. Verify the new IP host information in the database by entering the `rtrv-ip-host` command.

The following is an example of the possible output.

```
RLGHNCXA03W 01-03-30 21:19:37 GMT EAGLE 36.0.0
IPADDR      HOST
192.1.1.32  KC_HLR2
192.1.1.50  DN_MSC1
192.1.1.52  DN_MSC2
192.168.122.1 VSCCP_1107_A
192.168.123.1 VSCCP_1107_B
```

Note:

Most IGM customer private networks do not require setting up a default router for the Service Module card. However, if your network configuration does require a default router to connect the Service Module card communication to the EPAP, then only one default router is assignable to each Service Module card. Assign the default router address to each Service Module card as shown in this step.

39. Enter local domain and IP router address for the Service Module card using the `chg-ip-card` command.

For this example, enter this command:

```
chg-ip-card:loc=1107:domain=nc.tekelec.com :defrouter=192.168.122.250
where:
```

`loc` – The location of the Service Module card within the EAGLE 5 ISS.

`domain` – The domain name of domain server.
`defrouter` – Default router address. The IP address for default router. This is a TCP/IP address expressed in standard “dot notation”. IP addresses consist of the system’s network number and the machine’s unique host number.

After successful completion of this command, the system returns the following message:

```
RLGHNCXA03W 01-03-30 21:20:37 GMT EAGLE 36.0.0
CHG-IP-CARD: MASP A - COMPLTD
```

40. Verify the new TCP/IP parameters associated with the Service Module card in the database by entering the `rtrv-ip-card` command.

This is an example of the possible output:

```
RLGHNCXA03W 01-03-30 21:21:37 GMT EAGLE 36.0.0
LOC 1107
SRCHORDR LOCAL
DNSA -----
DNSB -----
DEFROUTER 192.168.122.250
DOMAIN NC.TEKELEC.COM
```

41. Boot the Service Module card that was added in [Step 31](#) on page 89 in TSM emulation mode by using the `alw-card` command.

For example, enter this command:

```
RLGHNCXA03W 01-03-30 21:14:37 GMT EAGLE 36.0.0
LOC PORT IPADDR SUBMASK DUPLEX SPEED MACTYPE AUTO MCAST
1107 A 192.168.122.1 255.255.255.0 HALF 100 DIX NO YES
1107 B 192.168.123.1 255.255.255.0 HALF 10 DIX NO YES
```

42. Verify the in-service normal (IS-NR) status of the Service Module card using the `rept-stat-card` command.

This is an example of the possible output.

```

RLGHNCXA03W 01-03-27 16:43:42 GMT EAGLE 36.0.0
CARD  VERSION          TYPE      APPL      PST          SST          AST
1101  100-000-00003-000  ASM      SCCP      IS-NR        Active       ---
1102  100-000-00003-000  ASM      SCCP      IS-NR        Active       ---
1103  100-000-00002-000  ACMENET  STPLAN   IS-NR        Active       ---
1104  100-000-00003-000  ASM      GLS       IS-NR        Active       ---
1105  100-000-00003-000  LIMOCU   CCS7ITU  IS-NR        Active       ---
1106  100-000-00003-000  LIMOCU   CCS7ITU  IS-NR        Active       ---
1107  100-000-00003-000  DSM      VS CCP    IS-NR        Active       ---
1113  100-000-00002-000  MCAP     OAM       IS-NR        Active       ---
1114  100-000-00002-000  TDM                      IS-NR        Active       ---
1115  100-000-00002-000  MCAP     OAM       IS-NR        Active       ---
1116  100-000-00002-000  TDM                      IS-NR        Active       ---
1117  100-000-00002-000  MDAL                      IS-NR        Active       ---
1201  100-000-00003-000  LIMDS0   SS7ANSI  IS-NR        Active       ---
1202  100-000-00002-000  LIMV35   SS7GX25  IS-NR        Active       ---
1203  100-000-00003-000  LIMV35   SS7ANSI  IS-NR        Active       ---
1204  100-000-00003-000  LIMATM   ATMANSI  IS-NR        Active       ---
1205  100-000-00001-000  DCM      IPLIM     IS-NR        Active       ---
1207  100-000-00001-000  DCM      SS7IPGW  IS-NR        Active       ---
1303  100-000-00001-000  DCM      IPLIM     IS-NR        Active       ---
1305  100-000-00001-000  DCM      SS7IPGW  IS-NR        Active       --

```

43. Test the presence of the EPAP hosts on the network using the `pass` command with the `ping` parameter.

This command is invoked with a destination (either a hostname or IP address). For example, enter the following command:

```

pass:loc=1107:cmd="ping 192.168.122.100".
pass:loc=1107:cmd="ping 192.168.122.200".
pass:loc=1107:cmd="ping 192.168.123.100".
pass:loc=1107:cmd="ping 192.168.123.200".

```

After successful completion of each command, the system returns output similar to the following:

```

rlghncxa03w 00-06-27 08:30:44 GMT EAGLE 36.0.0
pass:loc=1107:cmd="ping192.168.122.100"
Command entered at terminal #1.
;
rlghncxa03w 00-06-27 08:30:44 GMT EAGLE 36.0.0
PASS: Command sent to card
;
rlghncxa03w 00-06-27 08:30:44 GMT EAGLE 36.0.0
PING command in progress
;
rlghncxa03w 00-06-27 08:30:46 GMT EAGLE 36.0.0
PING 192.168.122.100: 56 data bytes
64 bytes from tekral.nc.tekelec.com (192.168.122.100):icmp_seq=0.time=5. ms
64 bytes from tekral.nc.tekelec.com (192.168.122.100):icmp_seq=1.time=0. ms
64 bytes from tekral.nc.tekelec.com (192.168.122.100):icmp_seq=2.time=0. ms
----192.168.100.3 PING Statistics----
3 packets transmitted, 3 packets received, 0% packet loss

```

```
round-trip (ms) min/avg/max = 0/1/5
PING command complete
```

If the `pass` commands with the `ping` parameter is not successful, verify the the correct connection of the hardware cabling and try again. If the command fails again, contact [Customer Care Center](#) on page 3.

44. Repeat [Step 30](#) on page 88 through [Step 43](#) on page 92 to add all Service Module cards (N+1) to be installed in available slots.

Go to the next step to start replacing TSM cards with Service Module cards.

Note: When adding Service Module cards in an in-service environment, take precautions to not interrupt traffic. Before replacing TSM cards running the SCCP application with Service Module cards, first install a Service Module card in an available dual-slot.

45. Replace TSM card(s) with Service Module cards if applicable and add Service Module card(s) to the database using [Step 46](#) on page 93 through [Step 68](#) on page 101.

In this procedure, we are removing two existing adjacent TSM cards and replace them with a dual-slot Service Module card in slots 1101 and 1102.

46. Display the TSM cards running the SCCP application in the database using the `rtrv-card` command.

This is an example of the possible output:

```
RLGHNCXA03W 01-03-15 16:34:56 GMT EAGLE 36.0.0
CARD   TYPE          APPL      PORT A LSET (SLC)  PORT B LSET (SLC) 1101
TSM
      SCCP          -----  (--)          -----  (--)
1102   TSM            SCCP          -----  (--)          -----  (--)
1103   ACMENET        STPLAN          -----  (--)          -----  (--)
1104   ACMENET        GLS             -----  (--)          -----  (--)
1105   LIMOCU         CCS7ITU        1s300001      (00)          -----  (--)
1106   LIMOCU         CCS7ITU        1s400001      (00)          -----  (--)
1107   DSM            VSCCP          1s300001      (00)          -----  (--)
1113   MCAP           OAM
1114   TDM
1115   MCAP           OAM
1116   TDM
1117   MDAL
1201   LIMDS0         SS7ANSI        1sn1           (00)          1sn2           (01)
1202   LIMV35        SS7GX25        1sngwy         (00)          -----  (--)
1203   LIMV35        SS7ANSI        1sn2           (00)          1sn1           (01)
1204   LIMATM        ATMANSI        atmgwy         (00)          -----  (--)
1205   DCM            IPLIM          ipgwy1         (00)          ipgwy3         (01)
1207   DCM            SS7IPGW        ipgwy2         (00)          -----  (--)
1303   DCM            IPLIM          ipgwy1         (00)          ipgwy3         (01)
1305   DCM            SS7IPGW        ipgwy4         (00)          -----  (--)
```

Determine the cards to be removed from the database. In this procedure, we will remove the SCCP cards in card locations **1101 and 1102**.

47. Display the TSM cards running the SCCP application that are in service with the `rept-stat-card:stat=nr` command.

For this example, enter the following command:

```
rept-stat-card:stat=nr
```

This is an example of the possible output:

```
RLGHNCXA03W 01-03-27 16:43:42 GMT EAGLE 36.0.0
```

CARD	VERSION	TYPE	APPL	PST	SST	AST	1101
100-000-00003-000	TSM	SCCP	IS-NR		Active	---	
1102	100-000-00003-000	TSM	SCCP	IS-NR	Active	---	
1103	100-000-00003-000	ACMENET	STPLAN	IS-NR	Active	---	
1104	100-000-00003-000	ACMENET	GLS	IS-NR	Active	---	
1105	100-000-00003-000	LIMOCU	CCS7ITU	IS-NR	Active	---	
1106	100-000-00003-000	LIMOCU	CCS7ITU	IS-NR	Active	---	
1107	100-000-00003-000	DSM	VSCCP	IS-NR	Active	---	
1113	100-000-00002-000	MCAP	OAM	IS-NR	Active	---	
1114	100-000-00002-000	TDM		IS-NR	Active	---	
1115	100-000-00002-000	MCAP	OAM	IS-NR	Active	---	
1116	100-000-00002-000	TDM		IS-NR	Active	---	
1117	100-000-00002-000	MDAL		IS-NR	Active	---	
1201	100-000-00003-000	LIMDS0	SS7ANSI	IS-NR	Active	---	
1202	100-000-00002-000	LIMV35	SS7GX25	IS-NR	Active	---	
1203	100-000-00003-000	LIMV35	SS7ANSI	IS-NR	Active	---	
1204	100-000-00003-000	LIMATM	ATMANSI	IS-NR	Active	---	
1205	100-000-00001-000	DCM	IPLIM	IS-NR	Active	---	
1207	100-000-00001-000	DCM	SS7IPGW	IS-NR	Active	---	
1303	100-000-00001-000	DCM	IPLIM	IS-NR	Active	---	
1305	100-000-00001-000	DCM	SS7IPGW	IS-NR	Active	---	

48. Inhibit the TSM cards running the SCCP application using the `inh-card` command and specifying the card locations.

```
inh-card:loc=1101
```

```
inh-card:loc=1102
```

When each command has successfully completed, this message appears:

```
RLGHNCXA03W 01-03-12 09:12:36 GMT EAGLE 36.0.0
Card has been inhibited.
```

49. Verify that the TSM cards running the SCCP application are in the Out-of-Service Maintenance-Disabled (OOS-MT-DSBLD) state with the `rept-stat-card` command.

This is an example of the possible output:

```
RLGHNCXA03W 01-03-27 16:43:42 GMT EAGLE 36.0.0
CARD  VERSION          TYPE  APPL      PST          SST          AST
1101  100-000-00003-000  TSM   SCCP      OOS-MT-DSBLD  Isolated    ---
1102  100-000-00003-000  TSM   SCCP      OOS-MT-DSBLD  Isolated    ---
1103  100-000-00002-000  ACMENET STPLAN    IS-NR         Active      ---
1104  100-000-00002-000  ACMENET STPLAN    IS-NR         Active      ---
1105  100-000-00003-000  LIMOCU CCS7ITU   IS-NR         Active      ---
1106  100-000-00003-000  LIMOCU CCS7ITU   IS-NR         Active      ---
1107  100-000-00003-000  DSM    VSCCP     IS-NR         Active      ---
1113  100-000-00002-000  MCAP   OAM       IS-NR         Active      ---
1114  100-000-00002-000  TDM             IS-NR         Active      ---
1115  100-000-00002-000  MCAP   OAM       IS-NR         Active      ---
1116  100-000-00002-000  TDM             IS-NR         Active      ---
1117  100-000-00002-000  MDAL            IS-NR         Active      ---
1201  100-000-00003-000  LIMDS0 SS7ANSI   IS-NR         Active      ---
1202  100-000-00002-000  LIMV35 SS7GX25   IS-NR         Active      ---
1203  100-000-00003-000  LIMV35 SS7ANSI   IS-NR         Active      ---
1204  100-000-00003-000  LIMATM ATMANSI   IS-NR         Active      ---
1205  100-000-00001-000  DCM    IPLIM     IS-NR         Active      ---
1207  100-000-00001-000  DCM    SS7IPGW   IS-NR         Active      ---
1303  100-000-00001-000  DCM    IPLIM     IS-NR         Active      ---
1305  100-000-00001-000  DCM    SS7IPGW   IS-NR         Active      ---
```

50. Remove the TSM cards running the SCCP application from the database using the `dlt-card` command.

The `dlt-card` command has only one parameter, `loc`, which is the location of the card. For this example, enter these commands:

```
dlt-card:loc=1101
dlt-card:loc=1102
```

After successful completion of this command, the system returns the following message:

```
RLGHNCXA03W 01-03-12 09:12:36 GMT EAGLE 36.0.0
DLT-CARD: MASP A - COMPLTD
```

51. Verify that the TSM cards running the SCCP application are removed from the database using the `rtrv-card` command and specifying the cards that were removed in [Step 50](#) on page 95. For this example, enter these commands:

```
rtrv-card:loc=1101
rtrv-card:loc=1102
```

After successful completion of this command, the system returns the following message:

```
E2144 Cmd Rej: Location invalid for hardware configuration
```

52. Locate the TSM card to be removed from the shelf.

Because the TSM card takes just one slot and the Service Module card requires two slots, the Service Module card must be installed in an odd slot that is adjacent to an even slot on its right side. In this procedure, we will remove two TSM cards from slots 1101 and 1102 to make space for one Service Module card.

- a) Push the inject/eject clamps outward from the card's faceplate (top clamp in the "UP" position, bottom clamp in the "DOWN" position). Pull the levers away from the shelf until they are parallel to the floor. Gently pull the card towards you until the card clears the shelf.

Figure 10: Push Inject/Eject Clamps Outward



- b) Place the card you have removed in an electrostatic discharge (ESD) protective container, or place the card in the spare card storage shelf.

53. Repeat [Step 52](#) on page 95 to remove the second TSM card.

54. Install the Service Module card in slots 1101 and 1102.

- a) Open the ejector levers on the Service Module card.

Carefully align the card's edges with the top and bottom card guides. Then push the card along the length of the card guides until the rear connectors on the card engage the mating connectors on the target shelf backplane.

- b) Press the left edge of the card's faceplate using constant pressure until you feel the card's progress cease.




WARNING

warning: Do not impact the faceplate in order to mate the connectors. Any impact to the card's faceplate can damage the faceplate, the pins, or the connectors.

- c) Push in the top and bottom inject/eject clamps. This locks the card in place and ensures a strong connection with the pins on the target shelf backplane.

Figure 11: Push in Inject/Eject Clamps

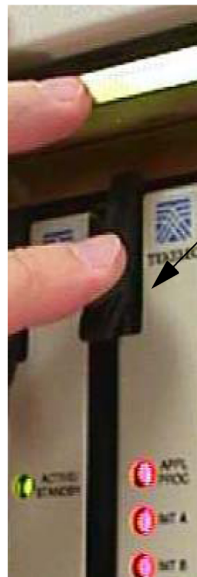

Push in the inject/eject clamps to lock the card in place.

- d) Verify that both IMT bus LEDs are green.
 - e) Install the cabling required to connect the Service Module card to the MPS. Refer to the Installation Manual for details.
55. Add the Service Module card to the database and assign the VSCCP application using the `ent-card` command.

For this example, enter this command:

```
ent-card:loc=1101:type=dsm:appl=vsccp
```

where:

`loc` - specifies the slot number for the card. The slot number must be an odd number.

`type` - specifies that the card is a DSM card.

`appl` - specifies that the application is VSCCP.

After successful completion of this command, the system returns the following message:

```
RLGHNCXA03W 01-03-12 09:12:36 GMT EAGLE 36.0.0
ENT-CARD: MASP A - COMPLTD
```

56. Display the new Service Module card using the `rtrv-card` command with the card location specified.

For this example, enter this command:

```
rtrv-card:loc=1101
```

This is an example of the possible output:

```
RLGHNCXA03W 01-03-30 09:12:36 GMT EAGLE 36.0.0
CARD  TYPE          APPL          PORT A LSET (SLC)  PORT B LSET (SLC) 1101 DSM
VSCCP
-----  (--)  -----  (--)
```

57. Display the current link parameters associated with the Service Module card in the database by entering the `rtrv-ip-lnk` command.

The following is an example of the possible output.

```
RLGHNCXA03W 01-03-30 21:17:37 GMT EAGLE 36.0.0
IPADDR      HOST
192.1.1.32  KC_HLR2
192.1.1.50  DN_MSC1
192.1.1.52  DN_MSC2
192.168.122.1 VSCCP_1107_A
192.168.123.1 VSCCP_1107_B
```

58. Change the link parameters associated with the Service Module card in the database using the `chg-ip-lnk` command.

For this example, enter these commands:

```
chg-ip-lnk:loc=1101:port=a:duplex=half:ipaddr=192.168.122.2
:mactype=dix:speed=100:mcast=yes:submask=255.255.255.0
chg-ip-lnk:loc=1101:port=b:duplex=half:ipaddr=192.168.123.2
:mactype=dix:speed=10:mcast=yes:submask=255.255.255.0
```

where:

:loc – The card location of the card within the EAGLE 5 ISS.

:port – The port ID. The port parameter of the `chg-ip-lnk` command specifies the physical interface of the Service Module card.

:ipaddr – IP address assigned to the port. This is a TCP/IP address expressed in standard “dot notation.” IP addresses consist of the system’s network number and the machine’s unique host number.

:duplex – This is the mode of operation of the interface.

:speed – This is interface bandwidth in megabits per second. The speed is either 100 Mbps for main DSM network or 10 Mbps for backup DSM network.

:mactype – This is the Media Access Control Type of the interface. Specify `dix` for the Digital/Inter/Xerox *de facto* standard for the Ethernet.

:mcast – This is the Multicast Control of the interface.

:submask – The subnet mask of the IP interface, in the form of an IP address with a restricted range of values.

When this command has successfully completed, the following message should appear.

```
RLGHNCXA03W 01-10-30 21:18:37 GMT EAGLE 37.0.0
CHG-IP-LNK: MASP A - COMPLTD
```

59. Verify the new link parameters associated with the Service Module card in the database by entering the `rtrv-ip-lnk` command.

The following is an example of the possible output.

```
RLGHNCXA03W 01-10-30 21:14:37 GMT EAGLE 37.0.0
LOC  PORT  IPADDR      SUBMASK      DUPLEX  SPEED  MACTYPE  AUTO  MCAST
1101  A      192.168.122.2  255.255.255.0  HALF    100    DIX      NO    YES
1101  B      192.168.123.2  255.255.255.0  HALF    10     DIX      NO    YES
1107  A      192.168.122.1  255.255.255.0  HALF    100    DIX      NO    YES
1107  B      192.168.123.1  255.255.255.0  HALF    10     DIX      NO    YES
```


60. Display the current IP host information in the database by entering the `rtrv-ip-host` command.
61. Add the host name and IP address for each VSCCP link using the `ent-ip-host` command.

For example, enter these commands:

```
ent-ip-host:host=vsccp_1101_a:ipaddr=192.168.122.2
ent-ip-host:host=vsccp_1101_b:ipaddr=192.168.123.2
```

where:

`host` - specifies the host name. Each VSCCP link must be specified separately.

`ipaddr` - specifies the IP network address for each EPAP. The first three octets of the IP address must be the same as MPS A and B ports, respectively. The fourth octet identifies the Service Module card and must have a unique octet identifier for the card's IP address; we recommend numbering the Service Module cards sequentially, using values 1 to 25. (This example shows the assignment of the second Service Module card.) After successful completion of this command, the system returns the following message:

```
RLGHNCXA03W 01-03-30 21:18:37 GMT EAGLE 36.0.0
ENT-IP-HOST: MASP A - COMPLTD
```

62. Verify the new IP host information in the database by entering the `rtrv-ip-host` command.

This is an example of the possible output:

```
RLGHNCXA03W 01-03-30 21:19:37 GMT EAGLE 36.0.0

IPADDR          HOST
192.1.1.32      KC_HLR2
192.1.1.50      DN_MSC1
192.1.1.52      DN_MSC2
192.168.122.1   VSCCP_1107_A
192.168.123.1   VSCCP_1107_B
192.168.122.2   VSCCP_1101_A 192.168.123.2 VSCCP_1101_B
```

Note:

Most IGM customer private networks do not require setting up a default router for the Service Module card. However, if your network configuration does require a default router to connect the Service Module card communication to the EPAP, then only one default router is assignable to each Service Module card. Assign the default router address to each Service Module card as shown in this step.

63. Enter local domain and IP router address for the Service Module card using the `chg-ip-card` command.

For this example, enter this command:

```
chg-ip-card:loc=1107:domain=nc.tekelec.com :defrouter=192.168.122.250
```

where:

`loc` - The card location of the card within the EAGLE 5 ISS.

`domain` - The domain name of domain server.

`defrouter` - Default router address. The IP address for default router. This is a TCP/IP address expressed in standard "dot notation". IP addresses consist of the system's network number and the machine's unique host number.

After successful completion of this command, the system returns the following message:

```
RLGHNCXA03W 01-03-30 21:20:37 GMT EAGLE 36.0.0
CHG-IP-CARD: MASP A - COMPLTD
```

64. Verify the local domain and IP router address associated with the Service Module card in the database by entering the `rtrv-ip-card` command.

This is an example of the possible output:

```
RLGHNCXA03W 01-03-30 21:21:37 GMT EAGLE 36.0.0
LOC 1101
  SRCHORDR LOCAL
  DNSA -----
  DNSB -----
  DEFROUTER 192.168.122.250
  DOMAIN    NC.TEKELEC.COM
```

65. Boot the Service Module card that was inhibited in [Step 48](#) on page 94 in TSM emulation mode by using the `alw-card` command.

For example, enter this command:

```
alw-card:loc=1101
```

This message appears:

```
RLGHNCXA03W 01-03-30 21:20:37 GMT EAGLE 36.0.0
Card has been allowed
```

66. Verify the in-service normal (IS-NR) status of the Service Module card using the `rept-stat-card` command.

This is an example of the possible output:

```
RLGHNCXA03W 01-03-27 16:43:42 GMT EAGLE 36.0.0
CARD  VERSION          TYPE      APPL      PST          SST          AST
1101  100-000-00003-000  DSM      VS CCP    IS-NR        Active      ---
1103  100-000-00002-000  ACMENET  STPLAN    IS-NR        Active      ---
1104  100-000-00003-000  TSM      GLS       IS-NR        Active      ---
1105  100-000-00003-000  LIMOCU   CCS7ITU   IS-NR        Active      ---
1106  100-000-00003-000  LIMOCU   CCS7ITU   IS-NR        Active      ---
1107  100-000-00003-000  DSM      VS CCP    IS-NR        Active      ---
1113  100-000-00002-000  MCAP     OAM       IS-NR        Active      ---
1114  100-000-00002-000  TDM      IS-NR     IS-NR        Active      ---
1115  100-000-00002-000  MCAP     OAM       IS-NR        Active      ---
1116  100-000-00002-000  TDM      IS-NR     IS-NR        Active      ---
1117  100-000-00002-000  MDAL     IS-NR     IS-NR        Active      ---
1201  100-000-00003-000  LIMDS0   SS7ANSI   IS-NR        Active      ---
1202  100-000-00002-000  LIMV35   SS7GX25   IS-NR        Active      ---
1203  100-000-00003-000  LIMV35   SS7ANSI   IS-NR        Active      ---
1204  100-000-00003-000  LIMATM   ATMANSI   IS-NR        Active      ---
1205  100-000-00001-000  DCM      IPLIM     IS-NR        Active      ---
1207  100-000-00001-000  DCM      SS7IPGW   IS-NR        Active      ---
1303  100-000-00001-000  DCM      IPLIM     IS-NR        Active      ---
1305  100-000-00001-000  DCM      SS7IPGW   IS-NR        Active      ---
```

67. Test the presence of the EPAP hosts on the network using the `pass` command with the `ping` parameter.

This command is invoked with a destination (either a hostname or IP address). For example, enter the following command:

```
pass:loc=1101:cmd="ping 192.168.122.100" .
pass:loc=1101:cmd="ping 192.168.122.200" .
pass:loc=1101:cmd="ping 192.168.123.100" .
pass:loc=1101:cmd="ping 192.168.123.200" .
```

After successful completion of each command, the system returns output similar to the following:

```
rlghncxa03w 00-06-27 08:30:44 GMT EAGLE 36.0.0
pass:loc=1101:cmd="ping 192.168.122.100"
Command entered at terminal #1.
;
rlghncxa03w 00-06-27 08:30:44 GMT EAGLE 36.0.0
PASS: Command sent to card
;
rlghncxa03w 00-06-27 08:30:44 GMT EAGLE 36.0.0
PING command in progress
;
rlghncxa03w 00-06-27 08:30:46 GMT EAGLE 36.0.0
PING 192.168.122.100: 56 data bytes
64 bytes from tekral.nc.tekelec.com (192.168.122.100):icmp_seq=0.time=5. ms
64 bytes from tekral.nc.tekelec.com (192.168.122.100):icmp_seq=1.time=0. ms
64 bytes from tekral.nc.tekelec.com (192.168.122.100):icmp_seq=2.time=0. ms
----192.168.100.3 PING Statistics----
3 packets transmitted, 3 packets received, 0% packet loss
round-trip (ms) min/avg/max = 0/1/5
PING command complete
```

If the pass command with the ping parameter is not successful, verify the the correct connection of the hardware cabling and try again. If the command fails again, contact [Customer Care Center](#) on page 3.

68. Repeat [Step 46](#) on page 93 through [Step 67](#) on page 100 to replace all adjacent TSM cards identified in the prerequisites and to be replaced with DSM cards.
69. Repeat [Step 48](#) on page 94 through [Step 52](#) on page 95 to inhibit any remaining TSM cards running the SCCP application and remove them from database and shelf.

Note:

The IGM feature cannot be turned on until TSM cards running the SCCP application are removed from the system.



CAUTION

CAUTION:

At this point in the procedure, contact [Customer Care Center](#) on page 3 for assistance in completing this IGM activation procedure. Do not proceed without consulting with Technical Services.

70. Turn on and configure the IGM feature using steps 71 through 89.
71. Enter the enable-ctrl-feat command to enable the IGM feature.


```
enable-ctrl-feat:partnum=893017301:fak=<Feature Access Key>
```
72. Enter the chg-ctrl-feat command to activate the IGM feature.


```
chg-ctrl-feat:partnum=893017301:status=ON
```

73. Enter the `enable-ctrl-feat` command to enable the MTP MSGS for SCCP Apps feature.
`enable-ctrl-feat:partnum=893017401:fak=<Feature Access Key>`
74. Enter the `chg-ctrl-feat` command to activate the MTP MSGS for SCCP Apps feature.
`chg-ctrl-feat:partnum=893017401:status=ON`
75. Enter the default country code (CC) and default network destination code (NDC) to convert the nature of address indicator (NAI) of MDNs to the international format (`nai=intl`) with the `chg-stpopts` command.

For example, enter this command:

```
chg-stpopts:defcc=1:defndc=38:dsm aud=on:np cfmt i=2-9-2-1
```

where:

`defcc` – The default country code.

`defndc` – The default network destination code.

`dsm aud` – The DSM audit running state (on or off).

`np cfmt i` – The ITU National Point Code Format Identifier, which identifies how the ITU-N point code is entered into the database and how it is displayed in all EAGLE 5 ISS outputs. This code is a 14-bit integer.

After successful completion of this command, the system returns the following output:

```
rlghncxa03w 01-03-07 00:57:31 GMT EAGLE 36.0.0
CHG-STPOPTS: MASP A - COMPLTD
```

76. Verify the new country code and network destination code using the `rtrv-stpopts` command.
 This is an example of the possible output:

```
rlghncxa03w 01-03-07 00:57:31 GMT EAGLE 36.0.0
CHG-STPOPTS: MASP A - COMPLTD
```

77. Change the GSM system options in the database.

For example, enter this command:

```
chg-gsmopts:srfnai=7:srfaddr=23448:srfnp=15:is412gsm=34
:msrsndig=ccr ndn: defmapvr=2
```

where:

`srfnai` defines the nature of address indicator value of the MNP_SRF.

`srfaddr` defines the entity address of the MNP_SRF node.

`srfnp` defines the numbering plan value of the MNP_SRF.

`is412gsm` defines the IS-41 to GSM migration prefix

`msrsndig` defines the routing number to be used or to be concatenated with the MDN.

`defmapvr` defines the default MAP version.

The system returns the following message:

```
rlghncxa03w 00-08-20 09:04:14 GMT EAGLE 36.0.0
CHG-GSMOPTS: MASP A - COMPLTD
```

78. Verify the changes using the `thertrv-gsmopts` command.

This command displays all GSM system options from the database. This is an example of the possible output:

```
GSMOPT OPTIONS
-----
SRFADDR=23448  SRFNAI=7  SRFNP=15
MSRNDIG=CCRNDN
MSRNNAI=7  MSRNNP=15  DEFMAPVR=2
```

79. Change the IS41 system options in the database.

For example, enter this command:

```
chg-is41opts:rspcgpanai=7:rspcgpanp=15:rspdig=ccrndn
```

where:

`rspcgpanai` - specifies a new NAI value to override the NAI value specified in the SCCP CdPA of a received LOCREQ/SMSREQ if the message is to be relayed after database lookup

.

`rspcgpanp` - defines the numbering plan value of the MNP_SRF.

`rspdig` - specifies the digit encoding format of the LOCREQ TCAP Outgoing Called Party parameter on a per EAGLE 5 ISS node basis.

The system returns the following message:

```
rlghncxa03w 00-08-20 09:04:14 GMT EAGLE 36.0.0
CHG-IS41OPTS: MASP A - COMPLTD
```

80. Verify the changes using the `rtrv-is41opts` command.

This command displays all is41 options from the database. This is an example of the possible output:

```
tekelecstp 06-08-15 10:33:44 EST EAGLE 36.0.0

IS41 OPTIONS
-----
SMSREQBYPASS      = NO
LOCREQDN          = TCAP
IEC               = 0
NEC               = 00
RSPCGPARI         = FRMSG
RSPCGPAPCP        = FRMSG
RSPCDPARI         = FRMSG
RSPCDPAPCP        = FRMSG
RSPCGPANAI        = 7
RSPCGPANP         = 15
RSPCGPATT         = 0
MTPLOCREQNAI     = SUB
RSPPARM           = DDIGIT
RSPDIG            = CCRNDN
RSPNON            = 0
RSPNP             = 0
RSPMIN            = NOTHOMERN
MSCMKTID          = 32300
MSCSWITCH         = 20
ESNMFG            = 0
```

```

ESNSN          = 0
RSPDIGTYPE     = 0
LOCREQRMHRN    = NO
TCAPSNAI       = SUB

```

- 81.** Add routing number prefixes for the operating network using the `ent-homern` command.

Use this command to enter any Home RNs that are prefixed to DNs for incoming INP MR messages. You may use this command to enter up to 100 routing number prefixes for the operating network into the HOMERN table. For example, enter this command:

```
ent-homern:rn=34
```

where:

`rn` – The home routing number prefix. The range is 1 to 15 hex digits (0-F).

When this command has successfully completed, this message appears.

```

RLGHNCXA03W 01-03-07 00:28:31 GMT EAGLE 36.0.0

HOMERN table is (1 of 100) 1% full
ENT-HOMERN: MASP A - COMPLTD

```

- 82.** Verify the changes using the `rtrv-homern` command.

This command retrieves a list of routing number prefixes that belong to the operating network. Here is an example of the possible output.

```

rlghncxa03w 01-03-28 00:29:31 GMT EAGLE 36.0.0.0
RN
-----
216780909087654
76345098
c10234567
c222
cabade
abc
abc123

HOMERN table is (6 of 100) 6% full

```

- 83.** Verify the changes using the `rtrv-srvsel` command.

This command retrieves a list of administered service selector combinations. This is an example of the possible output:

```

rlghncxa03w 00-06-20 09:09:14 GMT EAGLE 36.0.0
GTII TT NP NAI NPV NAIV SSN SNP SNAI SERV
4 1 e214 intl --- --- 3 --- --- mnp

```

- 84.** Use the `ent-srvsel` command to enter the IGM service selectors by network type.

This command assigns applicable service selectors required to specify the service entry for DSM services. For example, enter the following command:

```
ent-srvsel:gtii=4:tt=1:snp=e164:snai=intl:serv:mnp:nai=intl
:np=e164:ssn=9
```

where:

`gtii` - specifies the global title translation indicator (2 = ANSI, ITU; 4 = ITU).

`tt` - specifies the translation type.

`snp` - defines the service numbering plan (e164, e212, or e214).

`snai` - specifies the international Service Nature of Address Indicator.

`serv` - specifies the service feature.

`nai` - specifies the nature of address indicator.

`np` - specifies the numbering plan.

`ssn` - defines the subsystem number

The system returns the following message:

```
rlghncxa03w 01-03-07 00:28:31 GMT EAGLE 36.0.0
Service Selector table is (114 of 1024) 11% full
ENT-SRVSEL: MASP A - COMPLTD
```

85. Verify the changes using the `rtrv-srvsel` command.

This command retrieves a list of administered service selector combinations. Avoid lengthy output by filtering the list using various parameter combinations. (The selector table can have over 1,000 entries.) For example, enter this command:

```
rtrv-srvsel:gtii=2
```

```
rtrv-srvsel:gtii=4
```

After successful completion of this command, the system returns output similar to the following:

```
TII TT NP NAI NPV NAIV SNP SNAI SERV
2 0 e164 intl --- --- e164 intl gport
2 1 e164 intl --- --- e164 intl gport

rlghncxa03w 01-03-28 00:29:31 GMT EAGLE 36.0.0
GTII TT NP NAI NPV NAIV SNP SNAI SERV
4 0 e164 intl --- --- e164 intl gport
4 1 e164 intl --- --- e164 intl gport
```



CAUTION

CAUTION:

When you have an in-service environment and you are replacing TSM cards with Service Module cards, initialize one Service Module card at a time. Verify its return to IS-NR state before initializing another Service Module card. This precaution keeps cards in service and precludes an interruption of SCCP services.

GTT, EGTT, and VGTT traffic are routed based on the global titles in the OAM database while G-Flex, IGM, and INP traffic is routed based on the global title in the RTDB. Rebooting a Service Module card running the VSCCP application causes both the OAM and RTDB databases on the Service Module card to reload

86. Reload a Service Module card using the `init-card` command.

For example, enter this command:

```
init-card:loc=1101
```

The system returns the following message:

```
rlghncxa03w 01-03-07 00:28:31 GMT EAGLE 36.0.0
```

```
Command entered at terminal #3.
Init Card command issued to card 1101
```

87. Verify its return to IS-NR state with the `rept-stat-card` command.

(Wait until in-service state is restored.) This is an example of the possible output:

```
RLGHNCXA03W 01-03-07 00:30:42 GMT EAGLE 36.0.0
CARD VERSION TYPE APPL PST SST AST 1101
100-000-00003-000 DSM VSCCP IS-NR
Active ---
1103 100-000-00002-000 ACMENET STPLAN IS-NR Active ---
1104 100-000-00003-000 TSM GLS IS-NR Active ---
1105 100-000-00003-000 LIMOCU CCS7ITU IS-NR Active ---
1106 100-000-00003-000 LIMOCU CCS7ITU IS-NR Active ---
1107 100-000-00003-000 DSM VSCCP IS-NR Active ---
1113 100-000-00002-000 MCAP OAM IS-NR Active ---
1114 100-000-00002-000 TDM IS-NR Active ---
1115 100-000-00002-000 MCAP OAM IS-NR Active ---
1116 100-000-00002-000 TDM IS-NR Active ---
1117 100-000-00002-000 MDAL IS-NR Active ---
1201 100-000-00003-000 LIMDS0 SS7ANSI IS-NR Active ---
1202 100-000-00002-000 LIMV35 SS7GX25 IS-NR Active ---
1203 100-000-00003-000 LIMV35 SS7ANSI IS-NR Active ---
1204 100-000-00003-000 LIMATM ATMANSI IS-NR Active ---
1205 100-000-00001-000 DCM IPLIM IS-NR Active ---
1207 100-000-00001-000 DCM SS7IPGW IS-NR Active ---
1303 100-000-00001-000 DCM IPLIM IS-NR Active ---
1305 100-000-00001-000 DCM SS7IPGW IS-NR Active ---
```


88. After the `init-card` and the `rept-stat-card` commands show that service is successfully restored, repeat [Step 84](#) on page 104 and [Step 87](#) on page 106 for each Service Module card in your system.
89. Enter the `chg-sccp-serv:serv=mdp:state=online` command to set the IGM service state online.
90. Confirm that essential activation procedures are successful.
- Use `rept-stat-sccp` to verify all your Service Module cards are loaded and are IS-NR (in-service normal) status.
 - Use `rept-stat-mps` to verify all your Service Module cards and the EPAP are connected and operational.
 - Use `rept-stat-db:display=all` to verify database levels are identical for the EPAP PDB and RTDB and the RTDBs on the Service Module cards.

The IGM feature is now installed, activated, and ready for operations.

The 1100 TPS/Service Module Card for ITU NP Feature

This procedure is used to enable and turn on the 1100 TPS/Service Module card for ITU NP feature. This feature provides up to 26,400 transactions per second when the maximum number of Service Module cards are installed in the EAGLE 5 ISS and one or more EPAP-related features (such as G-Port, G-Flex, A-Port, INP, EIR, Migration) are enabled and turned on.

This feature can be enabled only for Service Module cards that are rated at 850 transactions per second (TPS).

 **CAUTION:** The increase of the Service Module card capacity, 1100 TPS per Service Module card, assumes incoming traffic consists of at least 30% of GTT routed traffic that does not require EPAP based lookup. If more than 70% of incoming traffic requires EPAP based lookup, Group Ticket Voucher (TVG) may shutdown and overall TVG capacity of 1100 for the card may not be met.

The feature access key is based on the feature's part number and the serial number of the EAGLE 5 ISS, making the feature access key site-specific.

The `enable-ctrl-feat` command enables the 1100 TPS/Service Module card for ITU NP feature by inputting the feature's access key and the feature's part number with these parameters:

:fak

The feature access key provided by Tekelec. The feature access key contains 13 alphanumeric characters and is not case sensitive.

:partnum

The Tekelec-issued part number of the 1100 TPS/Service Module card for ITU NP feature, 893018001.

After the 1100 TPS/Service Module card for ITU NP feature has been enabled, the feature must be turned on with the `chg-ctrl-feat` command. The `chg-ctrl-feat` command uses these parameters:

:partnum

The Tekelec-issued part number of the 1100 TPS/Service Module card for ITU NP feature, 893018001.

:status=on

Used to turn the 1100 TPS/Service Module card for ITU NP feature on.

Activating the 1100 TPS/Service Module Card for ITU NP Feature

The 1100 TPS/Service Module card for ITU NP feature cannot be enabled with a temporary feature access key.

The 1100 TPS/Service Module card for ITU NP feature cannot be enabled if:

- The EAGLE 5 ISS does not contain any Service Module cards.
- The LNP feature is enabled.

The status of the LNP feature is shown with the `rtrv-ctrl-feat` command output.

- The ANSI G-Flex STP Option is enabled.

The status of the ANSI G-Flex STP Option is shown in the `rtrv-stpopts` command output.

- The GTT feature is not turned on.

The status of the GTT feature is shown in the `rtrv-feat` command output.

The `enable-ctrl-feat` command requires that the database contain a valid serial number for the EAGLE 5 ISS, and that this serial number is locked. This can be verified with the `rtrv-serial-num` command. The EAGLE 5 ISS is shipped with a serial number in the database, but the serial number is not locked. The serial number can be changed, if necessary, and locked

once the EAGLE 5 ISS is on-site, with the `ent-serial-num` command. The `ent-serial-num` command uses these parameters:

:serial

The serial number assigned to the EAGLE 5 ISS. The serial number is not case sensitive.

:lock

Specifies whether or not the serial number is locked. This parameter has only one value, `yes`, which locks the serial number. Once the serial number is locked, it cannot be changed.

Note: To enter and lock the serial number of the EAGLE 5 ISS, the `ent-serial-num` command must be entered twice, once to add the correct serial number to the database with the `serial` parameter, then again with the `serial` and the `lock=yes` parameters to lock the serial number. Verify that the serial number in the database is correct before locking the serial number. The serial number can be found on a label affixed to the control shelf (shelf 1100).

The 1100 TPS/Service Module card for ITU NP feature increases the processing capacity of SCCP traffic for an EAGLE 5 ISS processing EPAP-based traffic to 26,400 transactions per second. To achieve this increase in SCCP processing capacity, a maximum of 25 Service Module cards must be provisioned and installed in the EAGLE 5 ISS.

1. Display the status of the 1100 TPS/Service Module card feature by entering the `rtrv-ctrl-feat` command.

The following is an example of the possible output:

```
rlghncxa03w 07-05-28 21:15:37 GMT EAGLE5 37.5.0
```

The following features have been permanently enabled:

Feature Name	Partnum	Status	Quantity
TPS	893000110	on	1000
ISUP Normalization	893000201	on	----
Prepaid SMS Intercept Ph1	893006701	on	----
MNP Circ Route Prevent	893007001	on	----
1100 TPS/DSM for ITU NP	893018001	on	----

The following features have been temporarily enabled:

Feature Name	Partnum	Status	Quantity	Trial Period Left
TPS	893000140	on	4000	20 days 8 hrs 57 mins

The following features have expired temporary keys:

Feature Name	Part Num
OnOffFeatV	893492401

2. Based on the output from the previous step, do one of the following:
 - If the `rtrv-ctrl-feat` output shows that the 1100 TPS/Service Module card for ITU NP feature is enabled, shown by the entry 1100 TPS/Service Module card for ITU NP, and its status is *on*, no further action is necessary.
 - If the feature is enabled and its status is *off*, go to [Step 13](#) on page 111.
 - If the `rtrv-ctrl-feat` output shows that the LNP feature is enabled, this procedure cannot be performed. The 1100 TPS/Service Module card for ITU NP feature cannot be enabled if the LNP feature is enabled.
 - If the 1100 TPS/Service Module card for ITU NP and LNP features are not enabled, go to the next step.

- Determine whether the G-Flex feature is turned on by entering the `rtrv-ctrl-feat`.
(If the G-Flex feature is off, then the ANSIGFLEX option is not displayed in the `rtrv-stpopts` output in the next step.)

The status of the G-Flex feature is shown by the entry *G-Flex* in the `rtrv-ctrl-feat` output.

- If the G-Flex feature is turned off, skip to [Step 5](#) on page 109.
- If the G-Flex feature is turned on, go to the next step.

- Verify that the ANSI G-Flex option is not enabled or turned on by entering the `rtrv-stpopts` command.

The 1100 TPS/Service Module card ITU NP feature cannot be enabled if the ANSI G-Flex option is turned on.

The ANSI G-Flex option is shown by the entry *ANSIGFLEX* in the `rtrv-stpopts` output. If the *ANSIGFLEX* entry is displayed in the `rtrv-stpopts` output, both the G-Flex and the GTT features are turned on.

- If the ANSIGFLEX value is *yes* in the `rtrv-stpopts` output, the ANSI G-Flex option is enabled and the remainder of this procedure cannot be performed.
- If the ANSIGFLEX value is *no* in the `rtrv-stpopts` output, the ANSI G-Flex option is *not* enabled. Go to [Step 6](#) on page 109.

- Determine whether the GTT feature is turned on by examining the output of the `rtrv-feat` command.

The 1100 TPS/Service Module card ITU NP feature cannot be enabled unless the GTT feature is turned on. The GTT feature is shown by the entry *GTT* in the `rtrv-feat` output executed in [Step 3](#) on page 109.

- If the GTT feature is turned on, go to the next step.
- If the GTT feature is turned off, perform "Adding a Service Module" in the *Database Administration Manual - Global Title Translation* manual to turn the GTT feature on and to add the required number of Service Module cards to the database. After "Adding a Service Module" has been performed, go to [Step 11](#) on page 110.

- Verify the number of Service Module cards that are provisioned in the database using the `rept-stat-gpl:gpl=sccphc` command:

This is an example of the possible output:

```
rlghncxa03w 07-05-01 11:40:26 GMT EAGLE5 37.5.0
GPL      CARD      RUNNING      APPROVED      TRIAL
VSCCCP 1201 126-002-000 126-002-000 126-003-000
VSCCCP 1203 126-002-000 126-002-000 126-003-000
VSCCCP 1207 126-002-000 126-002-000 126-003-000
VSCCCP 1213 126-002-000 126-002-000 126-003-000
VSCCCP 1215 126-002-000 126-002-000 126-003-000
VSCCCP 1305 126-002-000 126-002-000 126-003-000
VSCCCP 1313 126-002-000 126-002-000 126-003-000
VSCCCP 2103 126-002-000 126-002-000 126-003-000
Command Completed
```

- Based on the output shown in the previous step, do one of the following:
 - If the required number of Service Module cards are provisioned in the database, go to the next step.

- If the required number of Service Module cards are not provisioned in the database, perform "Adding a Service Module" in the *Database Administration Manual - Global Title Translation* to add the required number of Service Module cards to the database. After "Adding a Service Module" has been performed, go to the next step.
8. Display the serial number in the database with the `rtrv-serial-num` command.
- This is an example of the possible output:
- ```
rlghncxa03w 07-05-28 21:15:37 GMT EAGLE5 37.5.0
System serial number = nt00001231
System serial number is not locked
.
rlghncxa03w 07-05-28 21:15:37 GMT EAGLE5 37.5.0 Command Completed
```
9. Compare the actual serial number (located on a label affixed to the control shelf, shelf 1100) to the output shown in the previous step, and do one of the following:
- If the serial number is correct and locked, go to [Step 13](#) on page 111.
  - If the serial number is correct but not locked, go to [Step 12](#) on page 110.
  - If the serial number is not correct, but is locked, this feature cannot be enabled and the remainder of this procedure cannot be performed. Contact the [Customer Care Center](#) on page 3 to get an incorrect and locked serial number changed.
10. Enter the correct serial number into the database using the `ent-serial-num` command with the serial parameter.

For this example, enter this command:

```
ent-serial-num:serial=<EAGLE 5 ISS's correct serial number>
```

When this command has successfully completed, the following message appears:

```
rlghncxa03w 07-05-28 21:15:37 GMT EAGLE5 37.5.0
ENT-SERIAL-NUM: MASP A - COMPLTD
```

11. Verify that the serial number entered into [Step 7](#) on page 109 was entered correctly:

- a) Enter the `rtrv-serial-num` command.

This is an example of the possible output:

```
rlghncxa03w 07-05-28 21:15:37 GMT EAGLE5 37.5.0
System serial number = nt00001231
System serial number is not locked.
rlghncxa03w 07-05-28 21:15:37 GMT EAGLE5 37.5.0
Command Completed
```

- b) If the serial number was not entered correctly, repeat [Step 10](#) on page 110 and [Step 11](#) on page 110 and re-enter the correct serial number.

12. Lock the serial number in the database by entering the `ent-serial-num` command with the serial number shown in [Step 8](#) on page 110 (if the serial number shown in [Step 8](#) on page 110 is correct) or with the serial number shown in [Step 10](#) on page 110 (if the serial number was changed in [Step 10](#) on page 110 ), and with the `lock=yes` parameter.

For this example, enter this command:

```
ent-serial-num:serial=<EAGLE 5 ISS's serial number>:lock=yes
```

When this command has successfully completed, a message similar to the following should appear.

```
rlghncxa03w 07-05-28 21:15:37 GMT EAGLE5 37.5.0
ENT-SERIAL-NUM: MASP A - COMPLTD
```

13. Enable the 1100 TPS/Service Module card for ITU NP feature with the permanent key by entering the `enable-ctrl-feat` command.

For this example, enter this command:

```
enable-ctrl-feat:partnum=893018001:fak=<1100 TPS/Service Module card
for ITU NP feature access key>
```

**Note:** The values for the feature access key (the `fak` parameter) are provided by Tekelec. If you do not have the feature access key for the 1100 TPS/Service Module card for ITU NP feature, contact your Tekelec Sales Representative or Account Representative.

When the `enable-ctrl-feat` command has successfully completed, a message similar to the following should appear.

```
rlghncxa03w 07-05-28 21:15:37 GMT EAGLE5 37.5.0
ENABLE-CTRL-FEAT: MASP B - COMPLTD
```

14. Do one of the following:

- If you do not wish to turn the 1100 TPS/Service Module card for ITU NP feature on, skip this step and go to [Step 16](#) on page 111. If you do not turn this feature on, the transaction rate will remain at 850 TPS/Service Module card.
- If you do wish to turn on the 1100 TPS/Service Module card for ITU NP feature, enter the `chg-ctrl-feat` command, specifying the 1100 TPS/Service Module card for ITU NP feature part number used in [Step 13](#) on page 111 and the `status=on` parameter and enter the command again as shown in the next step.

For this example, enter this command:

```
chg-ctrl-feat:partnum=893018001:status=on
```

The following output message appears:

```
CAUTION: Rated TPS for this feature supports an engineered GTT traffic mix of
no more than 70 percent EPAP-based traffic. Re-enter the command within 30
seconds to confirm change.
```



**CAUTION**

**CAUTION:** If the EPAP-based traffic is higher than 70% of all traffic on the EAGLE 5 ISS, the Service Module card's performance may not reach 1100 TPS per Service Module card.

15. Re-enter the `chg-ctrl-feat` command to turn the feature ON.

For example `chg-ctrl-feat:partnum=893018001:status=on`

When this command has successfully completed, a message similar to the following should appear:

```
rlghncxa03w 07-05-28 21:15:37 GMT EAGLE5 37.5.0
CHG-CTRL-FEAT: MASP B - COMPLTD
```

16. Verify the changes by entering the `rtrv-ctrl-feat` command with the 1100 TPS/Service Module card for ITU NP feature part number specified in [Step 14](#) on page 111 or [Step 15](#) on page 111.

```
rtrv-ctrl-feat:partnum=893018001
```

The following is an example of the possible output:

```
rlghncxa03w 07-05-28 21:15:37 GMT EAGLE5 37.5.0
The following features have been permanently enabled:
Feature Name Partnum Status Quantity
TPS 893000110 on 1000
ISUP Normalization 893000201 on ----
Prepaid SMS Intercept Ph1 893006701 on ----
MNP Circ Route Prevent 893007001 on ----
1100 TPS/DSM for ITU NP 893018001 on ----

The following features have been temporarily enabled:
Feature Name Partnum Status Quantity Trial Period Left
TPS 893000140 on 4000 20 days 8 hrs 57 mins

The following features have expired temporary keys:
Feature Name Part Num
OnOffFeatV 893492401
```

**17. Backup the new changes by entering:**

```
chg-db:action=backup:dest=fixed
```

These messages should appear; the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

**18. If you wish to turn off TPS/Service Module card for ITU NP feature, enter the chg-ctrl-feat command, specifying the 1100 TPS/Service Module card feature part number used in [Step 14](#) on page 111 and the status=off parameter.**

For this example, enter this command:

```
chg-ctrl-feat:partnum=893018001:status=off
```

The following output message appears:

```
CAUTION: This command decreases the total TPS of the SCCP system from 1100 to
850 TPS for each DSM card.
```

**19. Confirm that you wish to turn off TPS/Service Module card for ITU NP feature by re-entering the command, as shown below, within 30 seconds:**

```
chg-ctrl-feat:partnum=893018001:status=off
```

When this command has successfully completed, the following message should appear:

```
rlghncxa03w 07-05-28 21:15:37 GMT EAGLE5 37.5.0
CHG-CTRL-FEAT: MASP B - COMPLTD
```

## Activating the E5-SM4G Throughput Capacity Feature

This procedure is used to enable and turn on the E5-SM4G Throughput Capacity feature. This feature provides up to 75,000 transactions per second when the maximum number of Service

Module cards are installed in the EAGLE 5 ISS and one or more EPAP-related features (such as G-Port, A-Port, G-Flex) are enabled and turned on.

The feature access key is based on the feature's part number and the serial number of the EAGLE 5 ISS, making the feature access key site-specific.

The `enable-ctrl-feat` command enables the E5-SM4G Throughput Capacity feature by inputting the feature's access key and the feature's part number with these parameters:

**:fak**

The feature access key provided by Tekelec. The feature access key contains 13 alphanumeric characters and is not case sensitive.

**:partnum**

The Tekelec-issued part number of the E5-SM4G Throughput Capacity feature, 893019101.

This feature cannot be enabled with a temporary feature access key.

The E5-SM4G Throughput Capacity feature cannot be enabled if:

- The LNP feature is enabled.
- The STPLAN feature is turned on.
- The GTT feature is not turned on.

The E5-SM4G Throughput Capacity feature cannot be enabled unless the EAGLE 5 ISS contains Service Module cards, and Service Module cards cannot be installed in the EAGLE 5 ISS unless HIPR cards are installed in all shelves containing Service Module cards. Enter the `rept-stat-gp1:gp1=hipr` command to verify if HIPR cards are installed in all shelves containing Service Module cards.

The status of the LNP feature is shown with the `rtrv-ctrl-feat` command output.

The status of the GTT is shown in the `rtrv-feat` command output.

The `enable-ctrl-feat` command requires that the database contain a valid serial number for the EAGLE 5 ISS, and that this serial number is locked. This can be verified with the `rtrv-serial-num` command. The EAGLE 5 ISS is shipped with a serial number in the database, but the serial number is not locked. The serial number can be changed, if necessary, and locked once the EAGLE 5 ISS is on-site, with the `ent-serial-num` command. The `ent-serial-num` command uses these parameters.

**:serial**

The serial number assigned to the EAGLE 5 ISS. The serial number is not case sensitive.

**:lock**

Specifies whether or not the serial number is locked. This parameter has only one value, `yes`, which locks the serial number. Once the serial number is locked, it cannot be changed.

**Note:**

To enter and lock the serial number of the EAGLE 5 ISS, the `ent-serial-num` command must be entered twice, first to add the correct serial number to the database with the `serial` parameter, then again with the `serial` and the `lock=yes` parameters to lock the serial number. Before locking the serial number, insure that the serial number in the database is correct. The serial number can be found on a label affixed to the control shelf (shelf 1100).

Once the E5-SM4G Throughput Capacity feature has been enabled, the feature must be turned on with the `chg-ctrl-feat` command. The `chg-ctrl-feat` command uses these parameters:

**:partnum**

The Tekelec-issued part number of the E5-SM4G Throughput Capacity feature, 893019101

**:status=on**

used to turn the E5-SM4G Throughput Capacity feature on.

This feature increases the processing capacity of SCCP traffic for an EAGLE 5 ISS processing EPAP-based traffic to 75,000 transactions per second. To achieve this increase in SCCP processing capacity, a maximum of 25 Service Module cards must be provisioned and installed in the EAGLE 5 ISS.

1. Display the status of the E5-SM4G Throughput Capacity feature by entering the `rtrv-ctrl-feat` command.

Possible output of this command follows:

```
rlghncxa03w 07-05-28 21:15:37 GMT EAGLE5 37.0.0
The following features have been permanently enabled:
```

| Feature Name              | Partnum   | Status | Quantity |
|---------------------------|-----------|--------|----------|
| IPGWx Signaling TPS       | 893012814 | on     | 20000    |
| ISUP Normalization        | 893000201 | on     | ----     |
| Command Class Management  | 893005801 | on     | ----     |
| Intermed GTT Load Sharing | 893006901 | off    | ----     |
| XGTT Table Expansion      | 893006101 | off    | ----     |
| XMAP Table Expansion      | 893007710 | on     | 3000     |
| Large System # Links      | 893005910 | on     | 2000     |
| Routesets                 | 893006401 | on     | 6000     |
| HC-MIM SLK Capacity       | 893012707 | on     | 64       |

The following features have been temporarily enabled:

| Feature Name        | Partnum | Status | Quantity | Trial Period Left |
|---------------------|---------|--------|----------|-------------------|
| Zero entries found. |         |        |          |                   |

The following features have expired temporary keys:

| Feature Name           | Partnum                    |
|------------------------|----------------------------|
| Zero entries found.    |                            |
| MNP Circ Route Prevent | 893007001 On               |
|                        | ---- 20 days 8 hrs 57 mins |

If the `rtrv-ctrl-feat` output shows that the E5-SM4G Throughput Capacity feature is enabled, shown by the entry E5-SM4G Throughput Cap, and its status is on, no further action is necessary.

If the `rtrv-ctrl-feat` output shows that the LNP feature is enabled, this procedure cannot be performed. The E5-SM4G Throughput Capacity feature cannot be enabled if the LNP feature is enabled.

If the feature is enabled, and its status is off, go to [Step 9](#) on page 116 (skip [Step 2](#) on page 114 through [Step 8](#) on page 116).

If the E5-SM4G Throughput Capacity and LNP features are not enabled, go to [Step 2](#) on page 114.

2. Enter the `rtrv-feat` command to verify the status of the STPLAN feature.



To enable the E5-SM4G Throughput Capacity feature, the STPLAN feature cannot be turned on.

The STPLAN feature is shown by the entry LAN in the `rtrv-feat` output.

If the STPLAN feature is turned on, this procedure cannot be performed.

If the STPLAN feature is turned off, go to [Step 3](#) on page 115

3. Verify that the GTT feature is turned on.

To enable the E5-SM4G Throughput Capacity feature, the GTT feature must be turned on. The GTT feature is shown by the entry GTT in the `rtrv-feat` output executed in [Step 2](#) on page 114. If the GTT feature is turned on, go to [Step 4](#) on page 115. If the GTT feature is turned off, perform "Adding a Service Module" in the *Database Administration Manual - Global Title Translation* in order to:

- Turn the GTT feature
- add the required number of Service Module cards to the database

After "Adding a Service Module" has been performed, go to [Step 5](#) on page 115 (skip [Step 4](#) on page 115).

4. Verify the number of Service Module cards that are provisioned in the database using the `rept-stat-gpl:gpl=sccphc` command.

This is an example of the possible output:

```
rlghncxa03w 07-05-01 11:40:26 GMT EAGLE5 37.0.0
GPL CARD RUNNING APPROVED TRIAL
SCCPHC 1201 126-002-000 126-002-000 126-003-000
SCCPHC 1203 126-002-000 126-002-000 126-003-000
SCCPHC 1207 126-002-000 126-002-000 126-003-000
SCCPHC 1213 126-002-000 126-002-000 126-003-000
SCCPHC 1215 126-002-000 126-002-000 126-003-000
SCCPHC 1305 126-002-000 126-002-000 126-003-000
SCCPHC 1313 126-002-000 126-002-000 126-003-000
SCCPHC 2103 126-002-000 126-002-000 126-003-000
Command Completed
```

If the required number of Service Module cards are provisioned in the database, go to [Step 5](#) on page 115.

If the required number of Service Module cards are not provisioned in the database, perform "Adding a Service Module" in the *Database Administration Manual - Global Title Translation* to add the required number of Service Module cards to the database. After the required number of Service Module cards are provisioned in the database, go to [Step 5](#) on page 115.

5. Verify whether HIPR cards are installed on all the EAGLE 5 ISS shelves containing Service Module cardService Module cards using the `rept-stat-gpl:gpl=hipr` command.

```
the rept-stat-gpl:gpl=hipr command.
rlghncxa03w 07-05-01 11:40:26 GMT EAGLE5 37.0.0
GPL CARD RUNNING APPROVED TRIAL
HIPR 1109 126-002-000 126-002-000 126-003-000
HIPR 1110 126-002-000 126-002-000 126-003-000
HIPR 1209 126-002-000 126-002-000 126-003-000
HIPR 1210 126-002-000 126-002-000 126-003-000
HIPR 1309 126-002-000 126-002-000 126-003-000
HIPR 1310 126-002-000 126-002-000 126-003-000
HIPR 2109 126-002-000 126-002-000 126-003-000
HIPR 2110 126-002-000 126-002-000 126-003-000
Command Completed
```

If HIPR cards are installed in all shelves containing Service Module cards, go to [Step 6](#) on page 116.

If HIPR cards are not installed on all shelves containing E5-SM4G cards, refer to the *Installation Manual - EAGLE 5 ISS* and install the HIPR cards on each of the shelves. Once the HIPR cards have been installed, go to [Step 6](#) on page 116.

6. Display the serial number in the database with the `rtrv-serial-num` command.

An example of output from this command follows:

```
rlghncxa03w 07-05-28 21:15:37 GMT EAGLE5 37.0.0
System serial number = nt00001231

System serial number is not locked.

rlghncxa03w 07-05-28 21:15:37 GMT EAGLE5 37.0.0
Command Completed
```

If the serial number is correct and locked, go to [Step 10](#) on page 117 (skip [Step 7](#) on page 116, [Step 8](#) on page 116, and [Step 9](#) on page 116). If the serial number is correct but not locked, go to [Step 9](#) on page 116 (skip [Step 7](#) on page 116 and [Step 8](#) on page 116). If the serial number is not correct, but is locked, this feature cannot be enabled and the remainder of this procedure cannot be performed. Contact the [Customer Care Center](#) on page 3 to get an incorrect and locked serial number changed. The serial number can be found on a label affixed to the control shelf (shelf 1100).

7. Enter the correct serial number into the database using the `ent-serial-num` command with the `serial` parameter.

For this example, enter this command:

```
ent-serial-num:serial=<EAGLE 5 ISS's correct serial number>
```

When this command has successfully completed, the following message appears.

```
rlghncxa03w 07-05-28 21:15:37 GMT EAGLE5 37.0.0
ENT-SERIAL-NUM: MASP A - COMPLTD
```

8. Verify that the serial number entered into [Step 7](#) on page 116 was entered correctly using the `rtrv-serial-num` command.

An example of output from this command follows:

```
rlghncxa03w 07-05-28 21:15:37 GMT EAGLE5 37.0.0
System serial number = nt00001231

System serial number is not locked.

rlghncxa03w 07-05-28 21:15:37 GMT EAGLE5 37.0.0
Command Completed
```

If the serial number was not entered correctly, repeat [Step 7](#) on page 116 and [Step 8](#) on page 116 and re-enter the correct serial number.

9. Lock the serial number in the database by entering the `ent-serial-num` command with the serial number shown in [Step 6](#) on page 116, if the serial number shown in [Step 6](#) on page 116 is correct, or with the serial number shown in [Step 8](#) on page 116, if the serial number was changed in [Step 7](#) on page 116, and with the `lock=yes` parameter.

For this example, enter this command:

```
ent-serial-num:serial=<EAGLE 5 ISS's serial number>:lock=yes
```

When this command has successfully completed, the following message appears:

```
rlghncxa03w 07-05-28 21:15:37 GMT EAGLE5 37.0.0
ENT-SERIAL-NUM: MASP A - COMPLTD
```

10. Enable the E5-SM4G Throughput Capacity feature with the permanent key by entering the `enable-ctrl-feat` command.

For this example, enter the following command:

```
enable-ctrl-feat:partnum=893019101:fak=<E5-SM4G Throughput Capacity
feature access key>
```

**Note:** The values for the feature access key (the `fak` parameter) are provided by Tekelec. If the feature access key for the E5-SM4G Throughput Capacity feature is not known, contact your Tekelec Sales Representative or Account Representative.

When the `enable-ctrl-feat` command has successfully completed, this message appears:

```
rlghncxa03w 07-05-28 21:15:37 GMT EAGLE5 37.0.0
ENABLE-CTRL-FEAT: MASP B - COMPLTD
```

Note: If you do not wish to turn the E5-SM4G Throughput Capacity feature on, go to [Step 12](#) on page 117 ( and skip [Step 11](#) on page 117) .

11. Turn the E5-SM4G Throughput Capacity feature using the `chg-ctrl-feat` command, specifying the E5-SM4G Throughput Capacity feature part number used in [Step 10](#) on page 117 and the `status=on` parameter.

For example, enter the following command:

```
chg-ctrl-feat:partnum=893019101:status=on
```

**Note:** Once this feature is turned on, it cannot be turned off.

When this command has successfully completed, the following message appears:

```
rlghncxa03w 07-05-28 21:15:37 GMT EAGLE5 37.0.0
CHG-CTRL-FEAT: MASP B - COMPLTD
```

12. Verify the changes by entering the `rtrv-ctrl-feat` command with the E5-SM4G Throughput Capacity feature part number specified in [Step 10](#) on page 117 or [Step 11](#) on page 117.

For example, enter the following command:

```
rtrv-ctrl-feat:partnum=893019101
```

An example of output from this command follows:

```
rlghncxa03w 07-05-28 21:15:37 GMT EAGLE5 37.0.0
The following features have been permanently enabled:
```

| Feature Name           | Partnum   | Status | Quantity |
|------------------------|-----------|--------|----------|
| E5-SM4G Throughput Cap | 893019101 | on     | ----     |

The following features have been temporarily enabled:

| Feature Name              | Partnum   | Status | Quantity | Trial Period Left     |
|---------------------------|-----------|--------|----------|-----------------------|
| Zero entries found.       |           |        |          |                       |
| G-Port Circ Route Prevent | 893007001 | On     | ----     | 20 days 8 hrs 57 mins |

The following features have expired temporary keys:

| Feature Name        | Partnum |
|---------------------|---------|
| Zero entries found. |         |

13. Backup the new changes using the `chg-db:action=backup:dest=fixed` command.

The following messages appear, with the active Maintenance and Administration Subsystem Processor (MASP) appearing first, as shown.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

# Chapter 5

## Maintenance and Measurements

---

### Topics:

- [Hardware Requirements Page 120](#)
- [EPAP Status and Alarms Page 120](#)
- [IGM System Status Reports Page 121](#)
- [Code and Application Data Loading Page 123](#)
- [IGM Related Alarms Page 128](#)
- [IGM UIMs Page 136](#)
- [IGM Related Measurements Page 139](#)

This chapter describes the maintenance and measurements information available from the EAGLE 5 ISS for the IS41 GSM Migration (IGM) feature. The information includes status, alarms (UAMs), information messages (UIMs), and reports from the Measurements Platform.

## Hardware Requirements

The EAGLE 5 ISS may be equipped with from 1 to 25 Service Module cards to support IGM. The IGM feature requires Service Module cards to run the VSCCP GPL.

**CAUTION:**

A mix of TSM cards running the SCCP application and Service Module cards running the VSCCP application is not permitted with the IGM feature enabled. These card types cannot coexist in a system operating the IGM feature. Refer to the *Dimensioning Guide for EPAP Advanced DB Features Technical Reference* for important information on the dimensioning rules and the DSM database capacity requirements.

The IGM feature also requires a T1000-based Multi-Purpose Server (MPS) system.

## EPAP Status and Alarms

Because EPAP has no direct means of accepting user input or displaying output messages on EAGLE 5 ISS terminals, maintenance, measurements, and status information are routed through a Service Module card. EPAP sends two types of messages to the Service Module card: [EPAP Maintenance Blocks](#) on page 120 and [DSM Status Requests](#) on page 121. Each message type is discussed in the following sections.

### EPAP Maintenance Blocks

The active EPAP generates and sends maintenance blocks to the primary Service Module card. One maintenance block is sent as soon as the IP link is established between the active EPAP and the primary Service Module card. Additional maintenance blocks are sent whenever the EPAP needs to report any change in status or error conditions. The information returned in maintenance blocks is included in the output of the `rept-stat-mps` and `rept-stat-sccp` commands.

The EPAP sends maintenance blocks that contain at least the following information:

- Status of EPAP 'A' - actual states are active, standby, and down (inoperative). Maintenance blocks include a field for this information so that it can be forwarded to the EPAP A Device Control Block (DCB), where it is available for the output of the `rept-stat-mps` command.
- Status of EPAP 'B' - actual states are active, standby, and down (inoperative). Maintenance blocks include a field for this information so that it can be forwarded to the EPAP B DCB, where it is available for the output of the `rept-stat-mps` command.
- Identification of Active EPAP - a field to identify the active EPAP.
- Congestion Indicator - an indicator showing provisioning link congestion. The link between the EPAPs and the external source of provisioning data can become congested in high-provisioning traffic situations. When this occurs and subsequently as the congestion clears, the EPAP sends maintenance blocks to the Service Module card. The EPAP must ensure that no more than one maintenance block per second is sent to the primary Service Module card if the only reason is to report a change in congestion status.

- Alarm Conditions - an error code field. If the EPAP needs to report an alarm condition, it puts an appropriate UAM identifier in this field.
- Current MPS Database Size - a field indicating the current RTDB size. The Service Module card uses this information to calculate the percentage of memory utilized by the RTDB.

## DSM Status Requests

When the EPAP needs to know the status of a Service Module card, it sends a DSM status request to that Service Module card. Because status messages are sent over UDP, the EPAP broadcasts the DSM status request (to all Service Module cards) and each Service Module card returns its status to the EPAP.

### DSM Status Reporting to the EPAP

The sections that follow describe the DSM status reporting for the EPAP.

### DSM Status Messages – When Sent

Service Module cards send a DSM status message to the EPAP when any the following events occur in the Service Module card:

- The Service Module card is booted.
- The Service Module card receives a DSM Status Request message from the EPAP
- The Service Module card determines that it needs to download the entire database, for example, if the Service Module card determines that the RTDB needs to be downloaded (for instance, if the database is totally corrupted), or if a craftsman requests that the database be reloaded.
- The Service Module card starts receiving database downloads or database updates. When a Service Module card starts downloading the RTDB or accepting database updates, it sends a DSM Status Message informing the EPAP of the first record received. This helps the EPAP keep track of downloads in progress.

### DSM Status Messages Fields

The DSM Status Message provides the following information to the EPAP:

- **DSM Memory Size.** When the Service Module card is initialized, it determines the amount of memory present. The EPAP uses the value to determine if the Service Module card has enough memory to hold the RTDB.

Refer to the *Dimensioning Guide for EPAP Advanced DB Features Technical Reference* for important information on the dimensioning rules and the Service Module card database capacity requirements.

- **Load Mode Status.** This indicator indicates whether or not 80% of the IS-NR (In-Service Normal) LIMs have access to SCCP services.

## IGM System Status Reports

Status reporting described here includes the following:

- System status
- IGM status
- Service Module card memory capacity status
- Loading mode support status

### System Status Reporting

The `rept-stat-sys` command supports the Service Module cards running the VSCCP application.

The `rept-stat-sccp` command supports the Service Module cards running the VSCCP application and reports IGM statistics.

### IGM Status Reporting

The `rept-stat-mps` command supports IGM system reporting. `rept-stat-mps` concentrates on reporting the status of the provisioning system. See "Maintenance and Measurements User Interface Commands", for more details. IGM statistics are placed in the `rept-stat-sccp` command.

### Service Module card Memory Capacity Status Reporting

As described in the [DSM Status Messages Fields](#) on page 121, the Service Module card sends a message to the EPAP containing the amount of memory on the Service Module card. The EPAP determines whether the Service Module card has enough memory to store the RTDB and sends an ack or nak back to the Service Module card indicating whether or not the Service Module card has an adequate amount of memory. Refer to the *Dimensioning Guide for EPAP Advanced DB Features Technical Reference* for important information on the dimensioning rules and the Service Module card database capacity requirements.

When the EPAP sends database updates to the Service Module cards, the update messages include a field that contains the new database memory requirements. Each Service Module card monitors the DB size requirements, and issues a minor alarm if the size of the DB exceeds 80% of its memory. If a database increases to the point that there is insufficient Service Module card memory, a major alarm is issued.

The `rept-stat-mps:loc=xxxx` command shows the amount of memory used by the RTDB as a percent of available Service Module card memory.

### Loading Mode Support Status Reporting

The OAM application determines whether or not the system is in an unstable loading mode since it knows the state of all LIM, SCCP, and Service Module cards in the system. When the loading mode is unstable, the `rept-stat-sys` command reports the existence of the unstable loading mode and the specific conditions that caused it. Refer to [Loading Mode Support](#) on page 124, for more details.



## Code and Application Data Loading

In general, administrative updates can occur while a Service Module card is loading. The Service Module card should also remain in an in-transition state if the STP portion of the database has completed loading and is waiting for the RTDB to download.

### Service Module Code Loading

The EAGLE 5 ISS OAM performs code loading of the Service Module card.

## EPAP Application Data Loading

The IGM feature requires that new TDM-resident data tables be loaded in addition to those currently supported by EAGLE 5 ISS. The GPL and data loading support this additional table loading while maintaining support for loading the existing EAGLE 5 ISS tables.

In order to support both RTDB and EAGLE 5 ISS data loading, the Service Module card GPL verifies its hardware configuration during initialization to determine if it has the capacity to support the RTDB.

The Service Module card GPL application data loader registers all tables for loading, independent of the IGM feature provisioning and main board / applique hardware configuration. As a result, load requests are always identical. During loading, multiple Service Module card load requests are combined into a single download, reducing the overall download time. The Service Module card stores or discards RTDB table data based on whether or not it has RTDB-capable hardware for features like G-Port, G-Flex, INP, and EIR.

The OAM, on the other hand, downloads or sets memory boundaries for the IGM options, HOMERN, and service selector tables only if the IGM feature is provisioned. When the IGM feature is not provisioned, the OAM does not attempt to read these tables from disk. Instead, empty tables (i.e., tables without entries) are downloaded. All other tables requested for loading are read from disk and downloaded routinely.

### Non IGM Data Initialization

If the Service Module card's hardware configuration cannot support the RTDB, the IGM tables are marked as absent during Service Management System initialization. Memory is not reserved for the IGM table data. IGM tables are registered with the application data loader (ADL), specifying a data discard function. IGM table data is discarded during loading by the ADL discard function, rather than storing it in memory.

### IGM Data Initialization

If the Service Module card detects IGM-capable hardware, the IGM tables are registered with ADL, specifying a data load function. Any IGM table data downloaded are stored in memory during loading.

### EPAP-Service Module Card Loading Interface

The Service Module card must convey to the EPAP that it needs to download the RTDB. This occurs when the Service Module card sends a Full Download Request message to the EPAP.

### Loading Mode Support

No more than 16 LIMs can be serviced by each TSM card running the SCCP application (or Service Module card).

### 80% Threshold of Support

Loading mode is based on the ability of the system to provide TSM card running the SCCP application service to at least 80% of the LIMs.

### Service Module card Capacity

An insufficient number of Service Module cards that are in the is-nr (In Service - Normal) or oos-mt-dsbl (Out of Service - Maintenance Disabled) relative to 80% of the number of provisioned LIMs is called a "failure to provide adequate TSM card running the SCCP application capacity."

### Insufficient TSM Card Running the SCCP Application Service

It is also possible for LIMs or Service Module cards to be inhibited or to have problems that prevent them from operating normally. If enough Service Module cards are out of service, it may not be possible for the remaining is-nr Service Module cards to service at least 80% of the number of is-nr LIMs. This is called "insufficient TSM card running the SCCP application service." When this occurs, some of the LIMs are denied TSM card running the SCCP application service. It is possible to inhibit LIMs to bring the ratio back to 16:1 (or better).

### Conditions That Create an Unstable Loading Mode

The current system implementation interrupts and aborts card loading upon execution of an STP database `chg` command. Loading mode support denies the execution of EAGLE 5 ISS database `chg` commands when the system is in an unstable loading mode. An unstable loading mode exists when any of the following conditions are true:

- The system's maintenance baseline has not been established.
- Less than 80% of the number of LIMs provisioned are is-nr or oos-mt-dsbl.
- The number of is-nr and oos-mt-dsbl TSM card running the SCCP application is insufficient to service at least 80% of all provisioned LIMs.
- Insufficient TSM card running the SCCP application service occurs when an insufficient number of is-nr Service Module cards are available to service at least 80% of the number of is-nr LIMs.
- LIM cards are being denied TSM card running the SCCP application service and any Service Module cards are in an abnormal state (oos-mt or is-anr).

### Effects of System in an Unstable Loading Mode

- No affect on RTDB downloads or updates.  
Unstable loading mode has no impact on RTDB downloads or the stream of RTDB updates.
- `rept-stat-sys` reports unstable loading mode.  
When the loading mode is unstable, the `rept-stat-sys` command response reports the existence of the unstable loading mode and the specific trigger that caused it.
- No STP database updates allowed.

When in an unstable loading mode, the EAGLE 5 ISS does not accept STP database updates. When updates are rejected, the reason is given as:

E3112 Cmd Rej: Loading Mode unstable due to TSM card running the SCCP application service is deficient.

The `inh-card` and `alw-card` commands can be used to alter TSM card running the SCCP application service levels to achieve the 80% threshold. This can be repeated for each card until the system is able to supply TSM card running the SCCP application services to at least 80% of the `is-nr` LIMs. The remaining 20% LIM or supporting Service Module cards may remain out of service until the stream of database updates ceases. This stream of updates can be temporarily interrupted to allow the remaining 20% of the system to come in service.

Once an STP database has been loaded, that database can be updated (as long as the system is not in an unstable loading mode). However, if an STP update arrives during STP database loading, the Service Module card aborts the current loading, issues a class 01D7 obit, and reboots. [Figure 12: Obit Message for Abort of Card Loading](#) on page 125 shows an example.

**Figure 12: Obit Message for Abort of Card Loading**

```

tekelecstp 97-04-08 12:29:04 EAGLE 35.0.0

Card 1317 Module RADB_MGR.C Line 337 Class 01d7
Card 1317 Module RADB_MGR.C Line 337 Class 01d7
Register Dump :
 EFL=00000246 CS =0058 EIP=0000808d SS =0060
 EAX=000a6ff3 ECX=000a0005 EDX=00000000 EBX=000a6fa0
 ESP=00108828 EBP=0010882c ESI=001f1e10 EDI=00000000
 DS =0060 ES =0060 FS =0060 GS =0060

Stack Dump :
[SP+1E]=001f [SP+16]=0000 [SP+0E]=000a [SP+06]=0010
[SP+1C]=1e10 [SP+14]=0004 [SP+0C]=6fa0 [SP+04]=8850
[SP+1A]=0010 [SP+12]=001f [SP+0A]=0004 [SP+02]=0001
[SP+18]=886c [SP+10]=4928 [SP+08]=7ec3 [SP+00]=504b

User Data Dump :

14 02 fa ed 01 01 1d 01 5a 01 00 Z..

Report Date:97-04-08 Time:12:29:04

```

### Using the force Option


Use the force option to force the execution of commands that would put the system in unstable loading mode. If executing the `ent-card` or `inh-card` commands would cause the system to enter an unstable loading mode, use the force option on the command.

### State Transitions during Start-Up

Figure 13: IGM Not Enabled, Service Module Card Running in TSM Emulation on page 126 through Figure 19: IGM Activation Unsuccessful due to Insufficient Database on page 128 show the transitions that a Service Module card goes through as it boots, loads code and data, and runs various VSCCP services. These figures do not illustrate every possible situation, but they include the most common scenarios involving the IGM feature.


In Figure 13: IGM Not Enabled, Service Module Card Running in TSM Emulation on page 126, the IGM feature is not enabled, and the Service Module card can operate in TSM emulation mode, although it does not provide IGM operation.

**Figure 13: IGM Not Enabled, Service Module Card Running in TSM Emulation**

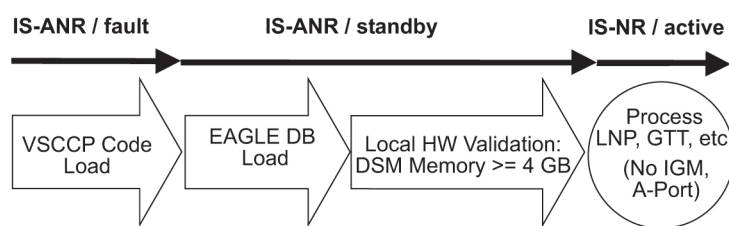


In Figure 14: IGM Enabled, Normal Operating Sequence on page 126, the IGM feature is enabled, and the Service Module card memory is 4 GB and is connected to the EPAP. A normal Service Module card operating sequence occurs, providing IGM service.

**Figure 14: IGM Enabled, Normal Operating Sequence**

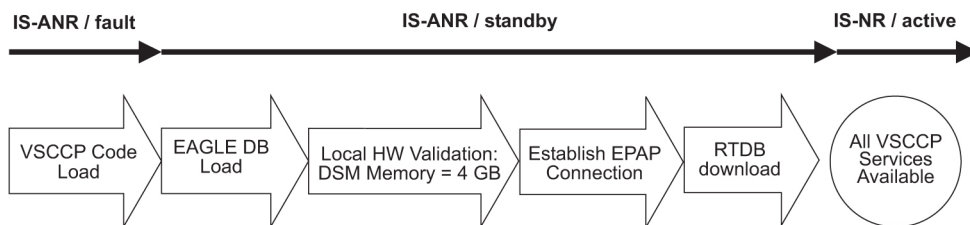

In Figure 15: IGM Enabled, but Service Module Card Not Connected to EPAP on page 126, the IGM feature is enabled, the Service Module card memory is 4 GB, but the Service Module card is unable to connect EPAP; the IGM cannot begin operation.


**Figure 15: IGM Enabled, but Service Module Card Not Connected to EPAP**

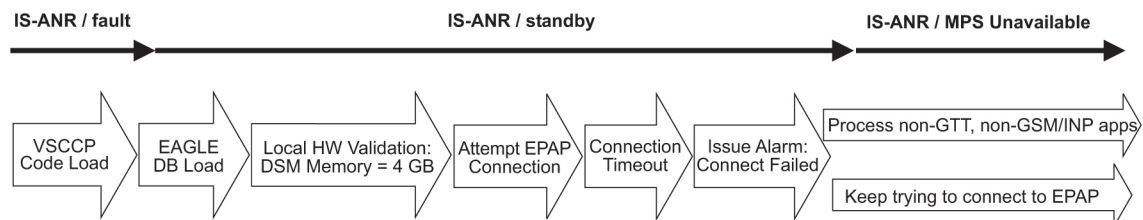

In Figure 16: IGM Enabled, but Service Module Card Memory Insufficient for Database on page 127, the IGM feature is enabled, the DSM card has the required 4 GB memory and is connected to the EPAP, but the DSM card is too small for the required database; IGM cannot begin operation. Refer


to the *Dimensioning Guide for EPAP Advanced DB Features Technical Reference* for important information on the dimensioning rules and the DSM database capacity requirements.

**Figure 16: IGM Enabled, but Service Module Card Memory Insufficient for Database**

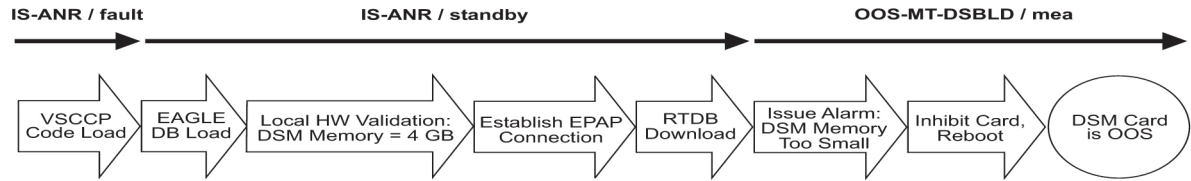


In [Figure 17: IGM Enabled, but Database Exceeds Service Module Card Memory](#) on page 127, the IGM feature is enabled, the Service Module card is connected to the EPAP, but the RTDB grows eventually to exceed the capacity of the Service Module card memory, despite its memory size of 4GB (an alarm is issued when the Service Module card memory becomes full from the RTDB update). The IGM cannot begin operation. Refer to the *Dimensioning Guide for EPAP Advanced DB Features Technical Reference* for important information on the dimensioning rules and the DSM database capacity requirements.

**Figure 17: IGM Enabled, but Database Exceeds Service Module Card Memory**

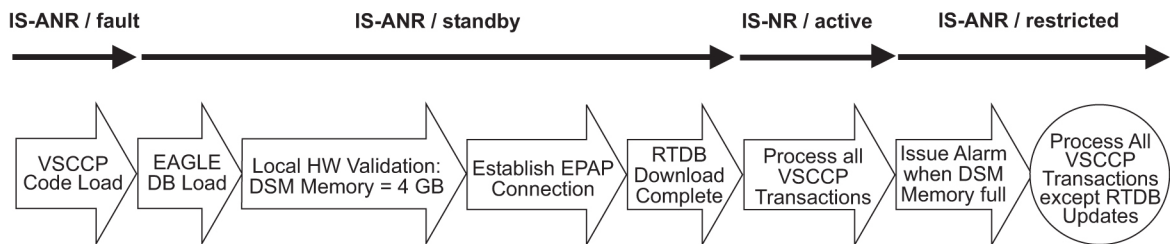

In [Figure 18: IGM Not Enabled at First, but then Activated on Service Module Card](#) on page 127, the IGM feature is not initially enabled; the Service Module card memory is 4 GB but no EPAP connection; the Service Module card is running other applications when the IGM feature is enabled and turned on; the Service Module card has sufficient memory to provide IGM service.


**Figure 18: IGM Not Enabled at First, but then Activated on Service Module Card**

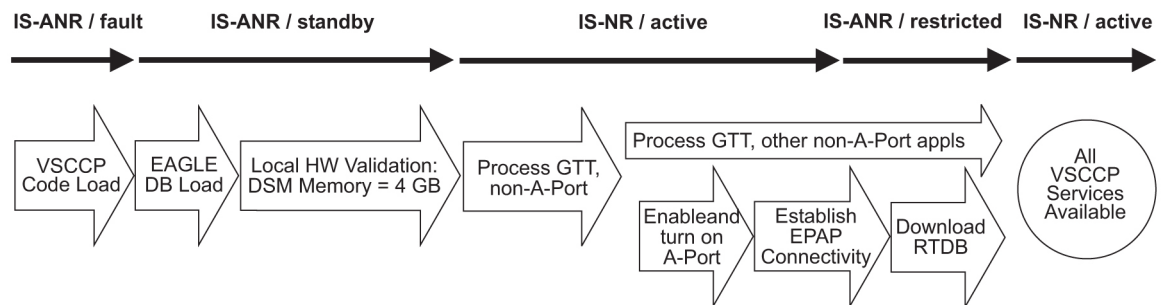

In [Figure 19: IGM Activation Unsuccessful due to Insufficient Database](#) on page 128, the IGM feature is not initially enabled; the Service Module card memory is 4 GB but no EPAP connection, and is running other applications when the IGM feature is turned on. However, the Service Module card memory is insufficient for the needed database, and the cannot provide IGM operation. Refer to

the *Dimensioning Guide for EPAP Advanced DB Features Technical Reference* for important information on the dimensioning rules and the DSM database capacity requirements.

**Figure 19: IGM Activation Unsuccessful due to Insufficient Database**

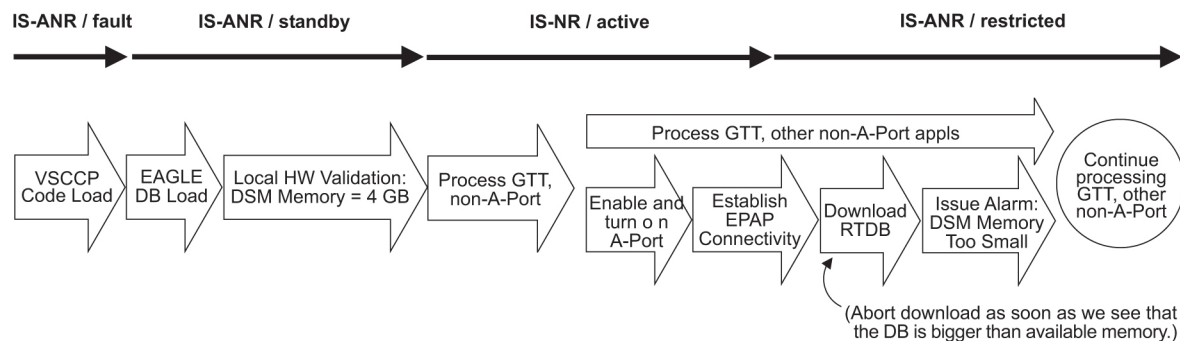

## IGM Related Alarms

All IGM related UAMs are output to the Maintenance Output Group. *Unsolicited Alarm and Information Messages* contains a complete description of all UAMs. [Table 22: IGM Related UAMs](#) on page 128 contains a listing of UAMs used to support the IGM feature.

Refer to *Unsolicited Alarm and Information Messages* for more information and corrective procedures for the EAGLE 5 ISS related alarms. Refer to *MPS Platform Software and Maintenance Manual* for information and corrective procedures for the MPS related alarms.

**Table 22: IGM Related UAMs**

| UAM  | Severity | Message Text                         | MPS or EAGLE 5 ISS |
|------|----------|--------------------------------------|--------------------|
| 0013 | Major    | Card is isolated from system         | EAGLE 5 ISS        |
| 0084 | Major    | IP Connection Unavailable            | EAGLE 5 ISS        |
| 0085 | None     | IP Connection Available              | EAGLE 5 ISS        |
| 0099 | Major    | Incompatible HW for provisioned slot | EAGLE 5 ISS        |
| 0250 | None     | MPS available                        | MPS                |
| 0261 | Critical | MPS unavailable                      | MPS                |

| UAM  | Severity | Message Text                              | MPS or EAGLE 5 ISS |
|------|----------|-------------------------------------------|--------------------|
| 0328 | None     | SCCP is available                         | EAGLE 5 ISS        |
| 0329 | None     | SCCP capacity normal,<br>card(s) abnormal | EAGLE 5 ISS        |
| 0330 | Major    | SCCP TPS Threshold<br>exceeded            | EAGLE 5 ISS        |
| 0331 | Critical | SCCP is not available                     | EAGLE 5 ISS        |
| 0335 | None     | SCCP is removed                           | EAGLE 5 ISS        |
| 0336 | Major    | LIMs have been denied<br>SCCP service     | EAGLE 5 ISS        |
| 0370 | Critical | Critical Platform<br>Failures             | MPS                |
| 0371 | Critical | Critical Application<br>Failures          | MPS                |
| 0372 | Major    | Major Platform<br>Failures                | MPS                |
| 0373 | Major    | Major Application<br>Failures             | MPS                |
| 0374 | Minor    | Minor Platform<br>Failures                | MPS                |
| 0375 | Minor    | Minor Application<br>Failures             | MPS                |
| 0422 | Major    | Insufficient extended<br>memory           | EAGLE 5 ISS        |
| 0423 | None     | Card reload attempted                     | EAGLE 5 ISS        |
| 0441 | Major    | Incorrect MBD - CPU                       | EAGLE 5 ISS        |
| 0442 | Critical | RTDB database<br>capacity is 95% full     | EAGLE 5 ISS        |

| UAM  | Severity | Message Text                         | MPS or EAGLE 5 ISS |
|------|----------|--------------------------------------|--------------------|
| 0443 | Major    | RTDB database is corrupted           | EAGLE 5 ISS        |
| 0444 | Minor    | RTDB database is inconsistent        | EAGLE 5 ISS        |
| 0445 | None     | RTDB database has been corrected     | EAGLE 5 ISS        |
| 0446 | Major    | RTDB database capacity is 80% full   | EAGLE 5 ISS        |
| 0447 | None     | RTDB database capacity alarm cleared | EAGLE 5 ISS        |
| 0448 | Minor    | RTDB database is incoherent          | EAGLE 5 ISS        |
| 0449 | Major    | RTDB resynchronization in progress   | EAGLE 5 ISS        |
| 0451 | Major    | RTDB reload is required              | EAGLE 5 ISS        |
| 0526 | None     | Service is available                 | EAGLE 5 ISS        |
| 0527 | Minor    | Service abnormal                     | EAGLE 5 ISS        |
| 0528 | Critical | Service is not available             | EAGLE 5 ISS        |
| 0529 | Critical | Service is disabled                  | EAGLE 5 ISS        |
| 0530 | None     | Service is removed                   | EAGLE 5 ISS        |

#### Service Module card-EPAP Link

Two alarms are used to indicate the Service Module card-to-EPAP link status. Refer to *Unsolicited Alarm and Information Messages* for information and corrective procedures for the following alarms.

- **UAM 0084** - *IP Connection Unavailable*



This message indicates that an IP application socket is out of service due to a IP link down (Ethernet problem) or due to the Service Module card.

```
station1234 00-09-30 16:28:08 EAGLE 36.0.0
** 5676.0084 ** DSM B 1101 IP Connection Unavailable
```

- **UAM 0085 - IP Connection Available**

This message indicates that a previously broken link between the EPAP and Service Module card is now functioning properly.

```
station1234 00-09-30 16:28:08 EAGLE 36.0.0
5676.0085 DSM B 1101 IP Connection Available
```

### MPS (EPAP) Alarms

The following alarms are output on the EAGLE 5 ISS and include an alarm data string in the output. Refer to *MPS Platform Software and Maintenance Manual* (except where noted) for information and corrective procedures for the following MPS related alarms.

- **UAM 0261 - MPS unavailable**

This message indicates that the EAGLE 5 ISS is unable to communicate with the MPS or the MPS has an internal failure. Refer to *Unsolicited Alarm and Information Messages* for the corrective action procedure.

Example:

```
station1234 00-09-30 16:28:08 EAGLE 36.0.0
*C 0259.0261 *C MPS B MPS unavailable
```

- **UAM 0370 - Critical Platform Failure (s)**

This message indicates the application running in the MPS server has detected a critical platform failure. The Alarm Data in the message contains a 16-character hexadecimal string in the format of h'1xxxxxxxxxxxxxx'. This alarm will be reset when UAM #250, MPS Available is issued.

Example:

```
station1234 00-09-30 16:28:08 EAGLE 36.0.0
*C 0259.0370 *C MPS B Critical Platform Failure(s)
ALARM DATA = h'1000000000000008'
```

- **UAM 0371 - Critical Application Failure (s)**

This message indicates the application running in the MPS server has detected a critical application failure. The Alarm Data in the message contains a 16-character hexadecimal string in the format of h'2xxxxxxxxxxxxxx'. This alarm will be reset when UAM #250, MPS Available is issued.

Example:

```
station1234 00-09-30 16:28:08 EAGLE 36.0.0
*C 0259.0371 *C MPS B Critical Application Failure(s)
ALARM DATA = h'2000000000000001'
```

- **UAM 0372 - Major Platform Failure (s)**

This message indicates the application running in the MPS server has detected a major platform failure. The Alarm Data in the message contains a 16-character hexadecimal string in the format of h'3xxxxxxxxxxxxxx'. This alarm will be reset when UAM #250, MPS Available is issued.

Example:

```
station1234 00-09-30 16:28:08 EAGLE 36.0.0
** 0259.0372 ** MPS B Major Platform Failure(s)
ALARM DATA = h'3000000000000002'
```

- **UAM 0373 - Major Application Failure (s)**

This message indicates the application running in the MPS server has detected a major application failure. The Alarm Data in the message contains a 16-character hexadecimal string in the format of h'4xxxxxxxxxxxxxx'. This alarm will be reset when UAM #250, MPS Available is issued.

Example:

```
station1234 00-09-30 16:28:08 EAGLE 36.0.0
** 0259.0373 ** MPS B Major Application Failure(s)
ALARM DATA = h'4000000000000008'
```

- **UAM 0374 - Minor Platform Failure (s)**

This message indicates the application running in the MPS server has detected a minor platform failure. The Alarm Data in the message contains a 16-character hexadecimal string in the format of h'5xxxxxxxxxxxxxx'. This alarm will be reset when UAM #250, MPS Available is issued.

Example:

```
station1234 00-09-30 16:28:08 EAGLE 36.0.0
* 0259.0374 * MPS B Minor Platform Failure(s)
ALARM DATA = h'5000000000000004'
```

- **UAM 0375 - Minor Application Failure (s)**

This message indicates the application running in the MPS server has detected a minor application failure. The Alarm Data in the message contains a 16-character hexadecimal string in the format of h'6xxxxxxxxxxxxxx'. This alarm will be reset when UAM #250, MPS Available is issued.

Example:

```
station1234 00-09-30 16:28:08 EAGLE 36.0.0
* 0259.0375 * MPS B Minor Application Failure(s)
ALARM DATA = h'6000000000000001'
```

### Card Related MPS Alarms

The following alarms are output on the EAGLE 5 ISS. Refer to *Unsolicited Alarm and Information Messages* for more information and corrective procedures for the following card related MPS alarms.

- **UAM 0013 - Card is isolated from system**

This indicates a card has become isolated and is unable to communicate to other cards in the system. This could be caused by a defective card, a power failure occurred on the card, or the system software has ordered a reset.

This also appears when the card has been manually reset by a command.

Example:

```
station1234 00-04-30 16:28:08 EAGLE 36.0.0
** 0012.0013 ** CARD 1101 SCCP Card is isolated from the system
 ASSY SN: 102199815a1234
```

- **UAM 0099** - Incompatible HW for provisioned slot

This indicates a DCM or Service Module card does not have an extended memory. This card is automatically inhibited.

Example:

```
station1234 00-04-30 16:28:08 EAGLE 36.0.0
** 0012.0099 ** CARD 1101 VSCCP Incompatible hardware for provisioned slot
 ASSY SN: 102199815a1234
```

- **UAM 0422** - Insufficient extended memory

At least one TSM card running the SCCP application does not have enough memory for the IGM application. Loading of the TSM card running the SCCP application is automatically inhibited.

Example:

```
station1234 00-04-30 16:28:08 EAGLE 36.0.0
** 0012.0422 ** CARD 1108 SCCP Insufficient extended memory
```

- **UAM 0423** - Card reload attempted

Card loading is no longer inhibited. The once inhibited card is now attempting to load.

Example:

```
station1234 00-04-30 16:28:08 EAGLE 36.0.0
0012.0423 CARD 1108 SCCP Card reload attempted
```

- **UAM 0441** - Incorrect main board - CPU

A Service Module card does not have the required hardware configuration for the IGM application.

Example:

```
station1234 00-04-30 16:28:08 EAGLE 36.0.0
** 0012.0441 ** CARD 1108 VSCCP Incorrect MBD - CPU
```

- **UAM 0442** - Insufficient RTDB database capacity

At least one Service Module card does not have at least 4Gb of memory or does not have enough capacity for the RTDB. Loading of the Service Module card is automatically inhibited.

Example:

```
station1234 00-04-30 16:28:08 EAGLE 36.0.0
*C 0012.0442 *C CARD 1108 VSCCP RTDB database capacity is 95% full
```

- **UAM 0443** - RTDB database is corrupted

A RTDB database is corrupt. The calculated checksum did not match the checksum value stored for one or more records.

Example:

```
station1234 00-04-30 16:28:08 EAGLE 36.0.0
** 0012.0443 ** CARD 1108 VSCCP RTDB database is corrupted
```

- **UAM 0444** - RTDB database is inconsistent

One or more Service Module card's real time database is not identical to the current real time database on the active EPAP fixed disks.

Example:

```
station1234 00-04-30 16:28:08 EAGLE 36.0.0
* 0012.0444 * CARD 1108 VSCCP RTDB database is inconsistent
```

- **UAM 0445** - RTDB database has been corrected

This message indicates that a problem with the RTDB has been corrected.

Example:

```
station1234 00-04-30 16:28:08 EAGLE 36.0.0
0012.0445 CARD 1108 VSCCP RTDB database has been corrected
```

- **UAM 0446** - RTDB Database capacity is 80% full

This message is displayed when a Service Module card detects that its daughterboard memory is at least 80% full.

Example:

```
station1234 00-04-30 16:28:08 EAGLE 36.0.0
** 0012.0446 ** CARD 1108 VSCCP RTDB Database capacity is 80% full
```

- **UAM 0447** - RTDB database capacity alarm cleared

This message indicates that a problem with the RTDB memory has been corrected.

Example:

```
station1234 00-04-30 16:28:08 EAGLE 36.0.0
0012.0447 CARD 1108 VSCCP RTDB database capacity alarm cleared
```

- **UAM 0448** - RTDB database is incoherent

This message indicates that the RTDB database download is in-process.

Example:

```
station1234 00-04-30 16:28:08 EAGLE 36.0.0
* 0012.0448 * CARD 1108 VSCCP RTDB database is incoherent
```

- **UAM 0449** - RTDB resynchronization in progress

This message indicates that the MPS database resynchronization is in-process.

Example:

```
station1234 00-04-30 16:28:08 EAGLE 36.0.0
** 0012.0449 ** CARD 1108 VSCCP RTDB resynchronization in progress
```

- **UAM 0451** - RTDB reload is required

The RTDB database on the Service Module card needs to be reloaded because the resynch log does not contain all of the required updates.

Example:

```
station1234 00-04-30 16:28:08 EAGLE 36.0.0
** 0012.0451 ** CARD 1108 VSCCP RTDB reload is required
```

### MPS Subsystem Alarms

The following alarms are output on the EAGLE 5 ISS for the MPS subsystem.

- **UAM 0526** - Service is available

A problem with the specified SCCP service has been corrected. All SCCP cards are IS-NR and have a service status of Active.

Example:

```
station1234 00-04-30 16:28:08 EAGLE 36.0.0
0056.0526 MNP SERVICE Service is available
```

- **UAM 0527** - Service abnormal

One or more of the cards providing the specified SCCP service do not have a service status of Active.

Example:

```
station1234 00-04-30 16:28:08 EAGLE 36.0.0
* 0056.0527 * MNP SERVICE Service abnormal
```

- **UAM 0528** - Service is not available

The IGM service is not available. No IS-NR SCCP cards are associated the IGM service. No SCCP cards providing the IGM service have a service status of Active.

Example:

```
station1234 00-04-30 16:28:08 EAGLE 36.0.0
*C 0056.0528 *C MNP SERVICE Service is not available
```

- **UAM 0529** - Service is disabled

The IGM service has been manually disabled with the chg-sccp-serv command. All IS-NR cards providing the IGM have service status of Offline.

Example:

```
station1234 00-04-30 16:28:08 EAGLE 36.0.0
*C 0056.0529 *C MNP SERVICE Service is disabled
```

- **UAM 0530** - Service is removed

The IGM SCCP service is not equipped. No TSM cards running the SCCP application are configured with the IGM service.

Example:

```
station1234 00-04-30 16:28:08 EAGLE 36.0.0
0056.0530 MNP SERVICE Service is removed
```

## IGM UIMs

*Unsolicited Alarm and Information Messages* contains a complete description of all UIM text and formats. If IGM is provisioned, then the following UIMs ([Table 23: IGM Related UIMs](#) on page 136) are used.

**Table 23: IGM Related UIMs**

| UIM  | Text                                     | Description                                                       | Action                                                             | Output Group (UI Output Direction) |
|------|------------------------------------------|-------------------------------------------------------------------|--------------------------------------------------------------------|------------------------------------|
| 1035 | SCCP rsp did not route - invalid GTI     | The SCCP response did not route due to an invalid GTI             | Use a valid GTI in the CGPA part of the query                      | gtt                                |
| 1036 | SCCP rsp did not route - invalid TT      | The SCCP response did not route due to an invalid TT              | Provision the CGPA TT in the GTT TT table                          | gtt                                |
| 1037 | SCCP rsp did not route - bad Xlation     | The SCCP response did not route due to a bad translation          | Provision the CGPA GTA address in the GTT database                 | gtt                                |
| 1038 | SCCP rsp did not route - SSP not True PC | The SCCP response did not route due to SSP is not true point code | Use the true point code in the CGPA point code or OPC of the query | gtt                                |

| UIM  | Text                                    | Description                                                                                                                                                          | Action                                                                                       | Output Group<br>(UI Output<br>Direction) |
|------|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|------------------------------------------|
| 1039 | SCCP rsp did not route - bad Selectors  | The SCCP response did not route due to invalid selectors                                                                                                             | Provision the CGPA GTI, TT, NP, and NAI in the EGTT selector table                           | gtt                                      |
| 1130 | LOCREQ rcvd - IS412GSM not provisioned  | The IS-41 to GSM Migration prefix (specified by the IS412GSM parameter) is not provisioned on this system.                                                           | The IS412GSM prefix must be specified in the GSMOPTS table.                                  | gtt                                      |
| 1131 | Invalid digits in IS41 MAP Digits parms | The EAGLE 5 ISS encountered an error in decoding the digits parameter in the LocationRequest message.                                                                | Correct the digits parameter                                                                 | gtt                                      |
| 1169 | SCCP rcvd inv TCAP portion              | This indicates that SCCP discarded a message because the TCAP provided in the called party address is invalid in the EAGLE 5 ISS.                                    | No action is necessary.                                                                      | application subsystem                    |
| 1227 | SCCP did not route - DPC not in MAP tbl | This message indicates that SCCP did not route a message because the destination point code was not in the mated application (MAP) table. The message was discarded. | If the DPC indicated in the message should not be routed to, no further action is necessary. | gtt                                      |

| UIM  | Text                                   | Description                                                                                                                                                         | Action                                                          | Output Group (UI Output Direction) |
|------|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|------------------------------------|
| 1230 | SCCP did not route - SS not in MAP tbl | This message indicates that SCCP did not route a message because the destination subsystem was not in the Mated Application (MAP) table. The message was discarded. | No action is necessary.                                         | gtt                                |
| 1242 | Conv to intl num - Dflt CC not found   | Conversion to international number failed because default CC was not found                                                                                          | Define the default CC with<br>chg-stpopts :defcc=xxx            | application subsystem              |
| 1243 | Conv to intl num - Dflt NC not found   | Conversion to international number failed because default NC was not found                                                                                          | Define the default NDC with<br>chg-stpopts :defndc=xxxxxx       | application subsystem              |
| 1246 | Invalid length of conditioned digits   | Invalid length of conditioned digits (length of conditioned international number is less than 5 or greater than 15)                                                 | Use an international number with length in the acceptable range | application subsystem              |
| 1256 | MNP Circular Route Detected            | This message indicates the network has incorrect number portability data for a subscriber.                                                                          | Verify and update number portability data.                      | application subsystem              |
| 1294 | Invalid digits in MAP MSISDN parameter | No digits found in MAP MSISDN parameter                                                                                                                             | Specify valid digits in the MSISDN                              | application subsystem              |



| UIM  | Text                                   | Description                                                                                                                            | Action                                                                                     | Output Group (UI Output Direction) |
|------|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|------------------------------------|
| 1295 | Translation PC is Eagle's              | PC translation is invalid because it is one of EAGLE 5 ISS's PCs                                                                       | Change the point code                                                                      | application subsystem              |
| 1297 | Invalid length of prefix/suffix digits | Attempted digit action of prefixing entity ID is invalid because combined length of entity ID and GT digits was greater than 21 digits | Change the attempted digit action or decrease the length of the entity ID and/or GT digits | application subsystem              |
| 1341 | SRI rcvd - GSM2IS41 not provisioned    | MIGRPFX=SINGLE and GSM2IS41 prefix is NONE. The GSM to IS-41 Migration prefix is not provisioned on this system.                       | The GSM2IS41 prefix must be specified in the GSMOPTS table.                                | gtt                                |

## IGM Related Measurements

Refer to the *Measurements* manual for for detailed measurement usage information.

### OAM Based Measurements

IGM measurements are available via the File Transfer Area (FTA) feature and not directly via EAGLE 5 ISS terminals. The File Transfer Area feature supports the transfer of file data between an EAGLE 5 ISS and a remote computer. The File Transfer Area feature provides the capability to download files from the EAGLE 5 ISS using a data communications link. The data communications link is accessed through a dial-up modem using one of the EAGLE 5 ISS RS-232 I/O ports. The link is illustrated in [Figure 7: Dial-Up PPP Network](#) on page 24.

See *Commands Manual* for details about using FTA commands, which are:

- Activate File Transfer: `act-file-trns`
- Copy to or from Transfer Area: `copy-fta`
- Delete Entry from File Transfer Area: `dlt-fta`
- Display File Transfer Area: `disp-fta-dir`

### Measurements Platform

The Measurements Platform (MP) is required for an EAGLE 5 ISS with more than 700 links. It provides a dedicated processor for collecting and reporting EAGLE 5 ISS, LNP, INP, G-FLEX, EIR, Migration, A-Port, and G-PORT measurements data. The interface to the customer's network supports the FTP transfer of Measurements reports to an FTP server. Following collection, scheduled reports are automatically generated and transferred to the customer FTP server via the FTP interface.

#### Note:

Existing FTP file server reports are overwritten by subsequent requests that produce the identical file name.

Reports can be scheduled or printed on-demand. Scheduled and on-demand reports are accessible by the following administrative commands:

- `chg-measopts` - Used to enable or disable the automatic generation and FTP transfer of scheduled measurement reports to the FTP server.
- `rept-stat-meas` - Reports the status of the measurements subsystem including card location and state, Alarm level, and Subsystem State.
- `rept-ftp-meas` - Manually initiates generation and FTP transfer of a measurements report from the MCPM to the FTP server.
- `rtrv-measopts` - Generates a user interface display showing the enabled/disabled status of all FTP scheduled reports.

*Table 24: Pegs for Per System MNP Measurements* on page 140 describes the Pegs per System measurement peg counts of MNP MSUs (Message Signaling Units) are supported for the IGM feature.

**Table 24: Pegs for Per System MNP Measurements**

| Event Name | Description                                                                                                                                                                                                                                                                                                                                         | Type   | Unit      |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-----------|
| APSMSRCV   | Number of SMS Request messages received<br><br><b>Note:</b> <ul style="list-style-type: none"> <li>• If the MT-Based IS41 SMS NP feature is not turned on and the <code>is41opts:smsreqbypass</code> option is set to yes, this count will not be updated.</li> <li>• If neither the MT-Based IS41 SMS NP feature nor the IGM feature is</li> </ul> | System | Peg count |

| Event Name | Description                                                                                                                                                                                                                                                                                                                                                                                        | Type   | Unit      |
|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-----------|
|            | turned on, this count will not be updated                                                                                                                                                                                                                                                                                                                                                          |        |           |
| APSMSREL   | <p>Number of SMS Request messages relayed</p> <p><b>Note:</b></p> <ul style="list-style-type: none"> <li>• If the MT-Based IS41 SMS NP feature is not turned on and the <code>is41optssmsreqbypass</code> option is set to yes, this count will not be updated.</li> <li>• If neither the MT-Based IS41 SMS NP feature nor the IGM feature is turned on, this count will not be updated</li> </ul> | System | Peg count |
| APSMRQREP  | <p>Number of SMSREQ messages received that result in SMSREQ ACK or SMSREQ NACK responses</p> <p><b>Note:</b> This count will include any SMSREQ NACKs generated by the IGM feature.</p>                                                                                                                                                                                                            | System | Peg count |
| APSMRQERR  | <p>Number of SMSREQ messages received that resulted in error.</p> <p><b>Note:</b> This count is only applicable when the incoming message is SMSREQ . The peg count is incremented only when the MT-Based IS-41 SMS NP feature is turned</p>                                                                                                                                                       | System | Peg count |

| Event Name | Description                                                                                                                            | Type   | Unit      |
|------------|----------------------------------------------------------------------------------------------------------------------------------------|--------|-----------|
|            | on. If the IGM feature is also turned on and the IGM feature handles the message resulting in an error, this peg count is incremented. |        |           |
| GPSRRCV    | Number of call-related SRI messages received                                                                                           | System | Peg count |
| GPSRGTT    | Number of call-related SRI messages that fell through to GTT                                                                           | System | Peg count |
| GPSRREP    | Number of call-related SRI messages that received A-Port service                                                                       | System | Peg count |
| GPSRERR    | Number of call-related messages that cause errors and SRI Negative ACK                                                                 | System | Peg count |
| IS41LRERR  | Number of IS-41 Location Request - Error response messages sent.                                                                       | System | Peg count |
| IS41LRMRCV | Number of IS-41 Location Request messages received.                                                                                    | System | Peg count |
| IS41LRTRN  | Number of IS-41 Location Request - Return Result messages sent                                                                         | System | Peg count |

*Table 25: Pegs for Per SSP MNP Measurements* on page 143 describes the per SSP measurement peg counts of MNP MSUs are supported for the feature.

**Table 25: Pegs for Per SSP MNP Measurements**

| Event Name | Description                                                             | Type       | Unit      |
|------------|-------------------------------------------------------------------------|------------|-----------|
| APLRACK    | Number of call related LOCREQ messages acknowledged.                    | Point Code | Peg count |
| APLRRLY    | Number of call related LOCREQ messages relayed                          | Point Code | Peg count |
| APNOCL     | Number of non-call non-LOCREQ related messages relayed                  | Point Code | Peg count |
| APNOCLGT   | Number of non-call non-LOCREQ related messages that fell through to GTT | Point Code | Peg count |
| GPSRACK    | Number of call-related SRI responses                                    | Point Code | Peg count |
| GPSRRLY    | Number of call-related SRI messages relayed                             | Point Code | Peg count |

*Table 26: Pegs for Per System and Per SSP MNP Measurements* on page 143 describes both the Per System and Per SSP MNP measurement peg counts of MNP MSUs are supported for the IGM feature.

**Table 26: Pegs for Per System and Per SSP MNP Measurements**

| Event Name | Description                                                  | Type               | Unit      |
|------------|--------------------------------------------------------------|--------------------|-----------|
| GPNOCL     | Number of non-call-related messages relayed by G-Port        | System, Point Code | Peg count |
| GPNOCLGT   | Number of non-call-related messages that fell through to GTT | System, Point Code | Peg count |

### Measurement Reports

Measurements are available with these report commands. Refer to the *Commands Manual* for detailed usage information.

The commands are specified as follows, where **xxx** is a three-letter abbreviation for a day of the week (MON, TUE, WED, THU, FRI, SAT, or SUN) and **yy** is an hour of the day:

- OAM Daily `rept-meas:type=mtcd:enttype=np`
- OAM hourly: `rept-meas:type=mtch:enttype=np`
- MP daily: `rept-ftp-meas:type=mtcd:enttype=np`
- MP hourly: `rept-ftp-meas:type=mtch:enttype=np`

# Glossary

## A

|        |                                                                                                                                                                                                                                                                                                                                                       |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ACK    | Data Acknowledgement                                                                                                                                                                                                                                                                                                                                  |
| ACM    | Application Communications Module<br><br>A card in the EAGLE 5 ISS that provides a communications interface to a remote host across an Ethernet LAN.                                                                                                                                                                                                  |
| ADL    | Application Data Loader                                                                                                                                                                                                                                                                                                                               |
| AINPQ  | ANSI-41 INP Query                                                                                                                                                                                                                                                                                                                                     |
| ANSI   | American National Standards Institute<br><br>An organization that administers and coordinates the U.S. voluntary standardization and conformity assessment system. ANSI develops and publishes standards. ANSI is a non-commercial, non-government organization which is funded by more than 1000 corporations, professional bodies, and enterprises. |
| A-Port | ANSI-41 Mobile Number Portability                                                                                                                                                                                                                                                                                                                     |
| AS     | Application Server<br><br>A logical entity serving a specific Routing Key. An example of an Application Server is a virtual switch element handling all call processing for a unique range of PSTN trunks, identified by an SS7                                                                                                                       |

## A

DPC/OPC/CIC\_range. Another example is a virtual database element, handling all HLR transactions for a particular SS7 DPC/OPC/SCCP\_SSN combination. The AS contains a set of one or more unique Application Server Processes, of which one or more normally is actively processing traffic.

## C

CC

Country Code

CCS7ITU

The generic program load and application for the ITU SS7 signaling links that is used with card types limds0, limch, limocu, limv35, lime1, and limt1.

CdPA

Called Party Address

The portion of the MSU that contains the additional addressing information of the destination of the MSU. Gateway screening uses this additional information to determine if MSUs that contain the DPC in the routing label and the subsystem number in the called party address portion of the MSU are allowed in the network where the EAGLE 5 ISS is located.

CgPA

Calling Party Address

The point code and subsystem number that originated the MSU. This point code and subsystem number are contained in the calling party address portion of the signaling information field of the MSU. Gateway screening uses this information to determine if MSUs that contain this point code and



## C

subsystem number area allowed in the network where the EAGLE 5 ISS is located.

Circular Route Prevention

See CRP.

CLLI

Common Language Location Identifier

The CLLI uniquely identifies the STP in terms of its physical location. It is usually comprised of a combination of identifiers for the STP's city (or locality), state (or province), building, and traffic unit identity. The format of the CLLI is:

The first four characters identify the city, town, or locality.

The first character of the CLLI must be an alphabetical character.

The fifth and sixth characters identify state or province.

The seventh and eighth characters identify the building.

The last three characters identify the traffic unit.

CPC

Capability Point Code

A capability point code used by the SS7 protocol to identify a group of functionally related STPs in the signaling network.

CPU

Central Processing Unit

CRP

Circular Route Prevention

A G-Port MNP feature that detects instances of circular routing caused by incorrect information in one or more of the network number portability databases. If a circular

## C

route has been detected, a message will be generated by the EAGLE 5 ISS and returned to the originator.

## D

Database

All data that can be administered by the user, including cards, destination point codes, gateway screening tables, global title translation tables, links, LNP services, LNP service providers, location routing numbers, routes, shelves, subsystem applications, and 10 digit telephone numbers.

DB

Database  
Daughter Board  
Documentation Bulletin

DCB

Device Control Block

DCM

Database Communication Module  
The DCM provides IP connectivity for applications. Connection to a host is achieved through an ethernet LAN using the TCP/IP protocol.

Destination

The node to which the signaling link traffic is routed. This destination is identified by a point code, either a full point code or a cluster point code.

DN

Directory number  
A DN can refer to any mobile or wireline subscriber number, and can include MSISDN, MDN, MIN, or the wireline Dialed Number.

**D**

|      |                                                                                                                                                                                                                                                                                                                                                                                     |
|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DPC  | <p>Destination Point Code</p> <p>DPC refers to the scheme in SS7 signaling to identify the receiving signaling point. In the SS7 network, the point codes are numeric addresses which uniquely identify each signaling point. This point code can be adjacent to the EAGLE 5 ISS, but does not have to be.</p>                                                                      |
| DPCI | <p>Destination Point Code International</p>                                                                                                                                                                                                                                                                                                                                         |
| DSM  | <p>Database Service Module.</p> <p>The DSM provides large capacity SCCP/database functionality. The DSM is an application card that supports network specific functions such as EAGLE Provisioning Application Processor (EPAP), Global System for Mobile Communications (GSM), EAGLE Local Number Portability (ELAP), and interface to Local Service Management System (LSMS).</p> |

**E**

|      |                                                                                                                                                                                                                                                                                                            |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EGTT | <p>Enhanced Global Title Translation</p> <p>A feature that is designed for the signaling connection control part (SCCP) of the SS7 protocol. The EAGLE 5 ISS uses this feature to determine to which service database to send the query message when a Message Signaling Unit (MSU) enters the system.</p> |
| EIR  | <p>Equipment Identity Register</p> <p>A network entity used in GSM networks, as defined in the 3GPP Specifications for mobile networks. The entity stores lists of International Mobile Equipment</p>                                                                                                      |

**E**

Identity (IMEI) numbers, which correspond to physical handsets (not subscribers). Use of the EIR can prevent the use of stolen handsets because the network operator can enter the IMEI of these handsets into a 'blacklist' and prevent them from being registered on the network, thus making them useless.

Enhanced Global Title Translation

See EGTT.

EPAP

EAGLE Provisioning Application Processor

ESD

Electro-Static Discharge

ESN

Electronic Serial Number

ETSI

European Technical Standards Institute

**F**

FAK

Feature Access Key

The feature access key allows the user to enable a controlled feature in the system by entering either a permanent feature access key or a temporary feature access key. The feature access key is supplied by Tekelec.

FTA

File Transfer Area

A special area that exists on each OAM hard disk, used as a staging area to copy files to and from the EAGLE 5 ISS using the Kermit file-transfer protocol.

**F**

|     |                                                                                                                                                                        |
|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FTP | <p>File Transfer Protocol</p> <p>A client-server protocol that allows a user on one computer to transfer files to and from another computer over a TCP/IP network.</p> |
|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

**G**

|         |                                                                                                                                                                                                                                                          |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GB      | <p>Gigabyte — 1,073,741,824 bytes</p>                                                                                                                                                                                                                    |
| G-Flex  | <p>GSM Flexible numbering</p> <p>A feature that allows the operator to flexibly assign individual subscribers across multiple HLRs and route signaling messages, based on subscriber numbering, accordingly.</p>                                         |
| GPL     | <p>Generic Program Load</p> <p>Software that allows the various features in the system to work. GPLs and applications are not the same software.</p>                                                                                                     |
| G-Port  | <p>GSM Mobile Number Portability</p> <p>A feature that provides mobile subscribers the ability to change the GSM subscription network within a portability cluster, while retaining their original MSISDN(s).</p>                                        |
| GPSM-II | <p>General Purpose Service Module</p> <p>Contains the communications processor and applications processor and provides connections to the Interprocessor Message Transport (IMT) bus. The GPSM-II card can run on the OAM, IPS, or MCP applications.</p> |
| GSM     | <p>Global System for Mobile Communications</p>                                                                                                                                                                                                           |

**G**

|     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GT  | Global Title Routing Indicator                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| GTA | Global Title Address                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| GTI | Global Title Indicator                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| GTT | Global Title Translation<br>A feature of the signaling connection control part (SCCP) of the SS7 protocol that the EAGLE 5 ISS uses to determine which service database to send the query message when an MSU enters the EAGLE 5 ISS and more information is needed to route the MSU. These service databases also verify calling card numbers and credit card numbers. The service databases are identified in the SS7 network by a point code and a subsystem number. |
| GUI | Graphical User Interface<br>The term given to that set of items and facilities which provide the user with a graphic means for manipulating screen data rather than being limited to character based commands.                                                                                                                                                                                                                                                          |

**H**

|        |                                    |
|--------|------------------------------------|
| HLR    | Home Location Register             |
| HOMERN | Home Network Routing Number Prefix |
| HRN    | Home Routing Number                |
| HW     | Hardware                           |

## I

|      |                                                                                                                                                                                                                                                                                                                                                                                                                |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ID   | Identity, identifier                                                                                                                                                                                                                                                                                                                                                                                           |
| IGM  | IS41 GSM Migration                                                                                                                                                                                                                                                                                                                                                                                             |
| IMT  | Inter-Module-Transport<br>The communication software that operates the inter-module-transport bus on all cards except the LIMATM, DCM, DSM, and HMUX.                                                                                                                                                                                                                                                          |
| IN   | Intelligent Network<br>A network design that provides an open platform for developing, providing and managing services.                                                                                                                                                                                                                                                                                        |
| INAP | Intelligent Network Application Protocol                                                                                                                                                                                                                                                                                                                                                                       |
| INP  | INAP-based Number Portability<br>Tekelec's INP can be deployed as a stand-alone or an integrated signal transfer point/number portability solution. With Tekelec's stand-alone NP server, no network reconfiguration is required to implement number portability. The NP server delivers a much greater signaling capability than the conventional SCP-based approach.<br>Intelligent Network (IN) Portability |
| IP   | Internet Protocol<br>IP specifies the format of packets, also called datagrams, and the addressing scheme. The network layer for the TCP/IP protocol suite widely used on Ethernet networks,                                                                                                                                                                                                                   |

## I

defined in STD 5, RFC 791. IP is a connectionless, best-effort packet switching protocol. It provides packet routing, fragmentation and re-assembly through the data link layer.

IS-41

Interim Standard 41, same as and interchangeable with ANSI-41. A standard for identifying and authenticating users, and routing calls on mobile phone networks. The standard also defines how users are identified and calls are routed when roaming across different networks.

IS41 GSM Migration

A feature that adds GSM IS-41 migration functions to the existing IS-41 to GSM feature. This enhancement provides flexibility in the encoding and decoding of parameters of LOCREQ messages and responses to number migration from one mobile protocol to another.

IS-ANR

In Service - Abnormal

The entity is in service but only able to perform a limited subset of its normal service functions.

ISDN

Integrated Services Digital Network

IS-NR

In Service - Normal

ISDN

Integrated Services Digital Network

Integrates a number of services to form a transmission network. For example, the ISDN network



**I**

integrates, telephony, facsimile, teletext, Datex-J, video telephony and data transfer services, providing users with various digital service over a single interface: voice, text, images, and other data.

ISS Integrated Signaling System

ITU International Telecommunications Union

**K**

KSR Keyboard Send/Receive Mode

**L**

LIM Link Interface Module  
Provides access to remote SS7, X.25, IP and other network elements, such as a Signaling Control Point (SCP) through a variety of signaling interfaces (V.35, OCU, DS0, MPL, E1/T1 MIM, LIM-ATM, E1-ATM, IPLIMx, IPGWx). The LIMs consist of a main assembly and possibly, an interface appliqué board. These appliqué provide level one and some level two functionality on SS7 signaling links.

Link Signaling Link

LNP Local Number Portability

LOCREQ Location Request Message  
A TDMA/CDMA MSC query to an HLR for retrieving subscription/location information

**L**

about a subscriber to terminate a voice call.

**M**

MAP

Mobile Application Part

MASP

Maintenance and Administration Subsystem Processor

The Maintenance and Administration Subsystem Processor (MASP) function is a logical pairing of the GPSM-II card and the TDM card. The GPSM-II card is connected to the TDM card by means of an Extended Bus Interface (EBI) local bus.

The MDAL card contains the removable cartridge drive and alarm logic. There is only one MDAL card in the Maintenance and Administration Subsystem (MAS) and it is shared between the two MASPs.

Mated Application

The point codes and subsystem numbers of the service databases that messages are routed to for global title translation.

MCPM

Measurement Collection and Polling Module

The Measurement Collection and Polling Module (MCPM) provides comma delimited core STP measurement data to a remote server for processing. The MCPM is an EDSM with 2 GB of memory running the MCP application.

MDN

Mobile Dialed Number

Mobile Directory Number

**M**

|     |                                                                                                                                                                                                                                                                                                                                                       |
|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MIM | Multi-Channel Interface Module                                                                                                                                                                                                                                                                                                                        |
| MIN | Mobile Identification Number                                                                                                                                                                                                                                                                                                                          |
| MNP | Mobile Number Portability                                                                                                                                                                                                                                                                                                                             |
| MP  | Measurement Platform<br>Message Processor<br>The role of the Message Processor is to provide the application messaging protocol interfaces and processing. However, these servers also have OAM&P components. All Message Processors replicate from their System OAM's database and generate faults to a Fault Management System.                     |
| MPS | Multi-Purpose Server<br>The Multi-Purpose Server provides database/reload functionality and a variety of high capacity/high speed offboard database functions for applications. The MPS resides in the General Purpose Frame.                                                                                                                         |
| MR  | Message Relay                                                                                                                                                                                                                                                                                                                                         |
| MRN | Message Reference Number<br>An unsolicited numbered message (alarm or information) that is displayed in response to an alarm condition detected by the system or in response to an event that has occurred in the system.<br>Mated Relay Node<br>A mated relay node (MRN) group is provisioned in the database to identify the nodes that the traffic |

## M

is load shared with, and the type of routing, either dominant, load sharing, or combined dominant/load sharing.

MS

Mobile Station

MSISDN

Mobile Station International  
Subscriber Directory Number

The MSISDN is the network specific subscriber number of a mobile communications subscriber. This is normally the phone number that is used to reach the subscriber.

MSRN

Mobile Station Roaming Number

MSU

Message Signaling Unit

The SS7 message that is sent between signaling points in the SS7 network with the necessary information to get the message to its destination and allow the signaling points in the network to set up either a voice or data connection between themselves. The message contains the following information:

- The forward and backward sequence numbers assigned to the message which indicate the position of the message in the traffic stream in relation to the other messages.
- The length indicator which indicates the number of bytes the message contains.
- The type of message and the priority of the message in the signaling information octet of the message.

## M

- The routing information for the message, shown in the routing label of the message, with the identification of the node that sent message (originating point code), the identification of the node receiving the message (destination point code), and the signaling link selector which the EAGLE 5 ISS uses to pick which link set and signaling link to use to route the message.

MTP

The levels 1, 2, and 3 of the SS7 protocol that control all the functions necessary to route an SS7 MSU through the network.

MTP Msgs for SCCP Apps

A feature that supports MTP-routed SCCP messages for the ANSI-41 Mobile Number Portability feature and the IS41 GSM Migration feature. The feature supports both LOCREQ and SMSREQ messages.

## N

NAI

Nature of Address Indicator  
Standard method of identifying users who request access to a network.

NAIV

NAI Value

NAK

Negative Acknowledgment

NC

Network Cluster  
Network Code

**N**

NDC Network destination code

NE Network Element  
An independent and identifiable piece of equipment closely associated with at least one processor, and within a single location.

NP Number Plan

**O**

OAM Operations, Administration, and Maintenance  
The generic load program (application) that operates the Maintenance and Administration Subsystem which controls the operation of the EAGLE 5 ISS.

OOS-MT Out of Service - Maintenance  
The entity is out of service and is not available to perform its normal service function. The maintenance system is actively working to restore the entity to service.

OPC Originating Point Code

OPS Operator Provisioning System

**P**

PC Point Code  
The identifier of a signaling point or service control point in a network. The format of the point code can be one of the following types:

## P

- ANSI point codes in the format network indicator-network cluster-network cluster member (**ni-nc-ncm**).
- Non-ANSI domestic point codes in the format network indicator-network cluster-network cluster member (**ni-nc-ncm**).
- Cluster point codes in the format network indicator-network cluster-\* or network indicator-\*-\*.
- ITU international point codes in the format **zone-area-id**.
- ITU national point codes in the format of a 5-digit number (**nnnnn**), or 2, 3, or 4 numbers (members) separated by dashes (**m1-m2-m3-m4**) as defined by the Flexible Point Code system option. A group code is required (**m1-m2-m3-m4-gc**) when the ITUDUPPC feature is turned on.
- 24-bit ITU national point codes in the format main signaling area-subsignaling area-service point (**msa-ssa-sp**).

The EAGLE 5 ISS LNP uses only the ANSI point codes and Non-ANSI domestic point codes.

PDB

Provisioning Database

PDBA

Provisioning Database Application

There are two Provisioning Database Applications (PDBAs), one in EPAP A on each EAGLE 5 ISS. They follow an Active/Standby model. These processes are responsible for updating and maintaining the Provisioning Database (PDB).

**P**

|       |                                                                                                                                                                                                                                    |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PDBI  | Provisioning Database Interface<br>The interface consists of the definition of provisioning messages only. The customer must write a client application that uses the PDBI request/response messages to communicate with the PDBA. |
| PPP   | Point-to-Point Protocol                                                                                                                                                                                                            |
| PPSMS | Prepaid Short Message Service<br>Prepaid Short Message Service Intercept                                                                                                                                                           |
| PPSMS | Prepaid Short Message Service Intercept                                                                                                                                                                                            |
| PT    | Portability Type                                                                                                                                                                                                                   |

**R**

|       |                                       |
|-------|---------------------------------------|
| RC    | Relative Cost                         |
| RFC   | Request for Comment                   |
| RMTP  | Reliable Multicast Transport Protocol |
| RN    | Routing Number                        |
| Route | A path to another signaling point.    |
| RS    | Requirement Specification             |
| RTDB  | Real Time Database                    |

**S**



## S

|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SAT                                 | Supervisory Audio Tone                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| SCCP                                | Signaling Connection Control Part                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| SCM                                 | System Configuration Manager<br>System Configuration Matrix.                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Service Nature of Address Indicator | See SNAI.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| SM                                  | Short Message                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| SMS                                 | Short Message Service                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| SMSREQ                              | SMS Request Message                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| SP                                  | Service Provider<br>Signaling Point                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Spare Point Code                    | The EAGLE ITU International/National Spare Point Code feature allows a network operator to use the same Point Codes across two networks (either ITU-I or ITU-N). The feature also enables National and National Spare traffic to be routed over the same linkset. The EAGLE uses the MSU Network Indicator (NI) to differentiate the same point code of one network from the other. In accordance with the SS7 standard, unique Network Indicator values are defined for Point Code types ITU-I, ITU-N, ITU-I Spare, and ITU-N Spare. |
| SRF                                 | Signaling Relay Function                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

## S

The SRF determines the HLR of the destination mobile station. If the mobile station is not ported, the original HLR is queried. If the mobile station is ported, the recipient HLR is queried.

SRI Send\_Route\_Information Message

SS Subsystem

SS7 Signaling System #7

SSN Subsystem Number

The subsystem number of a given point code. The subsystem number identifies the SCP application that should receive the message or the subsystem number of the destination point code to be assigned to an X.25 address or the LNP subsystem of the EAGLE 5 ISS.

A value of the routing indicator portion of the global title translation data commands indicating that no further global title translation is required for the specified entry.

SSP Subsystem Prohibited network management message.

Subsystem Prohibited SCCP (SCMG) management message. (CER)

STP Signal Transfer Point

STPs are ultra-reliable, high speed packet switches at the heart of SS7 networks, which terminate all link types except F-links. STPs are

## S

nearly always deployed in mated pairs for reliability reasons. Their primary functions are to provide access to SS7 networks and to provide routing of signaling messages within and among signaling networks.

## T

|        |                                                                                                                                                                                                                                                                                                              |
|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TCAP   | Transaction Capabilities Application Part                                                                                                                                                                                                                                                                    |
| TCP    | Transfer Control Protocol                                                                                                                                                                                                                                                                                    |
| TCP/IP | Transmission Control Protocol/Internet Protocol                                                                                                                                                                                                                                                              |
| TDM    | Terminal Disk Module<br>The MAS card that contains the fixed disk drive (hard disk storage), the terminal processor for the 16 serial I/O ports, and an interface to the MDAL (maintenance disk and alarm) card, which contains the removable cartridge drive and alarm logic.<br>Time Division Multiplexing |
| TFA    | TransFer Allowed (Msg)                                                                                                                                                                                                                                                                                       |
| TFP    | TransFer Prohibited (Msg)<br>A procedure included in the signaling route management (functionality) used to inform a signaling point of the unavailability of a signaling route.                                                                                                                             |
| TPS    | Transactions Per Second                                                                                                                                                                                                                                                                                      |

**T**

**TSM** Translation Services Module  
Provides SCCP functionality or GLS functionality for Local Number Portability (LNP)/SCCP (GTT). The SCCP software allows the TSM to be used as a memory board for Global Title Translation (GTT).

**TT** Translation Type.  
Resides in the Called Party Address (CdPA) field of the MSU and determines which service database is to receive query messages. The translation type indicates which Global Title Translation table determines the routing to a particular service database.

**TVG** Group Ticket Voucher

**U**

**UAM** Unsolicited Alarm Message.

**UDP** User Datagram Protocol

**UDTS** Unit Data Transfer Service

**UI** User Interface

**UIM** Unsolicited Information Message

**V**

**VGTT** Variable Length GTT  
A feature that provides the ability to provision global title entries of varying lengths to a single translation type or GTT set. Users

## V

are able to assign global title entries of up to 10 different lengths to a single translation type or GTT set.

## VSCCP

## VxWorks Signaling Connection Control Part

The application used by the Service Module card to support the G-Flex, G-Port, INP, AINPQ, EIR, A-Port, IGM, V-Flex, and LNP features. If the G-Flex, G-Port, INP, AINPQ, EIR, A-Port, IGM, V-Flex, or LNP feature is not turned on, and a Service Module card is present, the VSCCP GPL processes normal GTT traffic.

## X

## XUDT

## Extended User Data



# Feature Manual - IS41 GSM Migration

## Index

100BASE-T Ethernet bus 13  
10BASE-T Ethernet bus 13

### A

act-file-trns 139  
act-slk 74, 87  
Actions Taken When Hardware Determined to be Invalid 43  
activate signaling link 101  
activate signaling link, act-slk  
    SS7IPGW 101  
active EPAP 14, 17, 22, 66  
active EPAP RTDB process 17  
active/standby EPAP servers 16  
add capability PC 77  
add route for new DPC 84  
add signaling link 84  
ADL 123  
administering IGM features 46  
admonishments, documentation 3  
alarm totals 65  
allow DSM card 105  
allow inhibited card 100  
alw-card 73, 74, 75, 86, 91, 100, 125  
AMD-K6 main board 42  
appl=vsccp 83, 89, 97  
application data loader 123  
assign routes and linksets 77  
availability, documentation 6

### C

calculates checksums 44  
call-related messages 10  
capability point code 77, 79, 80  
card loading interrupted or aborted 124  
card state 43  
caution  
    init-sys command 73, 80  
CAUTION admonishment 3  
change GSM system options 76  
Change GSM System Options Command 47  
change link parameters 98  
change TCP/IP information for DSM 99  
change true PC 77  
checksums  
    database corrupt alarm 44  
chg-ctrl-feat 75, 76  
chg-gsmopts 47, 76, 102, 103  
chg-ip-card 74, 75, 91, 99

chg-ip-lnk 74, 75, 98  
chg-is41opts  
    Change IS41 Options Command 49  
chg-sccp-serv  
    Change G-Flex SCCP Service Command 59  
chg-sid 73, 80  
chg-srvsel  
    Change MNP Service Selector Command 55  
chg-stpopts 76, 102  
Coherent 21  
command  
    chg-sid 73, 80  
    ent-homern 104  
    init-sys 73, 80  
    rept-stat-sys 62  
    rtrv-homern 76, 104  
Commands  
    chg-ctrl-feat 58  
    chg-gsmopts 49  
    enable-ctrl-feat 58  
    rtrv-ctrl-feat 58  
configure EAGLE 5 SAS point code 73  
Copy to or from Transfer Area 139  
copy-fta 139  
corrupted 66  
CPC 77  
CSR, See Customer Service Request (CSR)  
Current 20  
Customer Care Center  
    contact information 3  
    emergency response 5  
customer network 17  
Customer Service Request (CSR) 3  
Customer Support site  
    how to access 7  
customer's external provisioning system 17

### D

DANGER admonishment 3  
data from customer network 17  
database  
    loading complete 123  
    records 14  
    status information 66  
database exception status 66  
database memory requirements 122  
DCBs 21  
debug command ent-trace 43  
Delete Entry from File Transfer Area 139  
delete MNP service selector command 56

destination point codes 72, 77  
 dev=dlk parameter 67  
 device control blocks 21  
 dial-up modem 139  
 direct routing 10  
 disp-fta-dir 139  
 Display File Transfer Area 139  
 display signaling link status, rept-stat-slk  
     SS7IPGW 87  
 dlt-card 74, 95  
 dlt-fta 139  
 dlt-sccp-serv  
     Delete G-Flex SCCP Service Command 60  
 documentation 3, 6, 7  
     availability, packaging, and updates 6  
     Documentation Bulletins 7  
     electronic files 6  
     locate on Customer Support site 7  
     printed 6  
     Related Publications 6  
     Release Notice 6  
 download files from STP 139  
 DPC 72, 77  
 dpci, dpcn parameters 77  
 dual provisioning 17

## E

Eagle commands 46  
 EAGLE Commands for IGM Feature 47  
 Eagle Provisioning Application Processor 12  
 EAGLE Provisioning Application Processor 14, 17  
 EAGLE Provisioning Application Processors 16  
 Eagle Service Module card databases 12  
 electronic files, documentation 6  
 emergency response, Customer Care Center 5  
 enable-ctrl-feat 75, 76  
 ent-card 73, 74, 75, 83, 89, 97, 125  
 ent-dstn 73, 81  
 ent-homern 104  
 ent-ip-host 74, 75, 90, 99  
 ent-ls 73, 82  
 ent-map 73, 85  
 ent-rte 73, 84  
 ent-serial-num 108  
 ent-slk 73, 84  
 ent-srvsel 55, 76, 104  
     Enter MNP Service Selectors Command 55  
 ent-trace 43  
 enter G-Flex service selectors 76, 104  
 entering  
     init-sys command 73, 81  
 EPAP 12, 13, 14, 16, 17  
 EPAP A 16  
 EPAP A, Link A 20  
 EPAP A, Link B 20  
 EPAP architecture 17

EPAP automatically updates PDB 17  
 EPAP B 16  
 EPAP B, Link A 20  
 EPAP B, Link B 20  
 EPAP network addresses 24  
 ept-stat-epap 21  
 Ethernet links 13  
 ETSI standards 10  
 exception status 66

## F

File Transfer Area 139  
 force option 125  
 FTA 139

## G

GDB requirements 41  
 General Purpose Service Module II card 44  
 global title domain 57  
 Globalcast Communications 19  
 GPSM-II 44  
 gsmopts commands 47  
 GSMOPTS table 47  
 GTT selectors 41

## H

hardware configuration 43  
 high-traffic situations 18  
 host=epap-a 90, 99

## I

IGM Loading Mode Support 43  
 IGM Related Alarms 128  
 import/export traffic 21  
 IN-based MNP 10  
 incoherent 66  
 inconsistent 66  
 incremental loading 20  
 Incremental update 20  
 incremental updates 20  
 indirect routing 10  
 inh-card 74, 94, 125  
 inhibit LIMs 124  
 init-card 76, 105, 106  
 init-sys 73, 81  
 init-sys command  
     caution 73, 80  
     re-entering 73, 81  
 initializing Service Module cards 19  
 intercepting MAP messages 10  
 invalid hardware configuration 43  
 IP 19



## Feature Manual - IS41 GSM Migration

IP Multicast 19  
ipaddr=192.168.122.nnn 90, 99  
is41opts commands 49  
IS41OPTS table 49

### L

LIMs 43  
LIMs denied TSM card running the SCCP application service 124  
Link Interface Module 43  
linksets assigned 77  
load balancing 18  
loc parameter 63, 84  
loc=1103 83, 89, 97  
Local Memory Validation 42  
local provisioning terminal 17  
locate documentation on Customer Support site 7  
loss of connectivity 19

### M

main board 42  
maintenance application traffic 22  
mated EPAP system 13  
mated MPS servers 13  
mated pair configuration 17  
maximum number length 2, 11  
MEA 43  
measurements 68  
memory requirements 122  
message relay 10  
Message Signaling Unit 43  
Migration IS41 options (is41opts) 49  
Migration measurements 68  
Migration system options (gsmopts) 47  
Mismatch of Equipment and Attributes 43  
MNP Circular Route Prevention 11  
MNP Re-routing 34  
modem for remote access 17  
MPS 16  
MPS platform 12  
MSUs 43  
multi cast updates 17  
Multi-Purpose Server 12  
Multi-Purpose Server (MPS) hardware 16  
multiple Service Modules 20  
MySQL 17

### N

network addresses 24  
npcfmt option 79

### O

OAM provisioning 23  
OPS 16  
overlapping database updates 17

### P

packaging, documentation 6  
parameter 80  
pass 74, 75, 92, 100  
PCI  
    chg-sid 80  
PCI parameter  
    chg-sid 80  
PCN  
    chg-sid 80  
PCN parameter  
    chg-sid 80  
PDB 16  
PDBA 14, 21  
PDBI 15, 16  
Pegs for both Per System and Per SSP 143  
Pegs per SSP measurement peg counts 142  
ping parameter 92, 100  
planing your site 46  
platforms 13  
point code 80  
ported numbers 2, 11  
printed documentation 6  
provision Service Module cards 14  
provision V-Flex 14  
Provisioning Database 13, 16, 17  
Provisioning Database Application 14  
Provisioning Database Interface 16  
provisioning Service Module cards 17

### R

re-entering init-sys command 73, 81  
real-time database 15  
Real-Time Memory Validation 43  
Realtime Database 16  
RealTime Database 13  
Related Publications 6  
Release Notice 6  
Reliable Multicast Transport Protocol-II 19  
reloading multiple Service Modules 20  
replace TSM card with DSM card 88  
rept-stat-card 73, 74, 75, 76, 86, 92, 93, 94, 100, 106  
    stat=nr 93  
rept-stat-epap 43, 122  
rept-stat-sccp 122  
rept-stat-slk 74, 87  
rept-stat-sys 62, 122, 124  
Retrieve GSM System Options Command 48  
RMTP multicast 14

RMTP-II 19  
 routes and linksets assigned to the DPCs 77  
 routing number prefixes 104  
 routing options 10  
 RS-232 I/O ports 139  
 RS232 connection 15  
 RTDB 16  
 RTDB database 17  
 rtrv-card 73, 74, 75, 83, 87, 89, 93, 95, 97  
 rtrv-ctrl-feat 108  
 rtrv-dstn 72, 73, 77, 80, 82  
 rtrv-gsmopts 48  
 rtrv-homern 76, 104  
 rtrv-ip-card 74, 75, 91, 100  
 rtrv-ip-host 74, 75, 90, 99  
 rtrv-ip-lnk 74, 75  
 rtrv-is41opts  
   Retrieve IS41 Options Command 54  
 rtrv-ls 73, 82  
 rtrv-map 72, 73, 79, 86  
 rtrv-rte 72, 73, 78, 80, 85  
 rtrv-sccp-serv  
   Retrieve G-Flex SCCP Service Command 61  
 rtrv-serial-num 108  
 rtrv-sid 72, 73, 77, 81  
 rtrv-slk 73, 84  
 rtrv-srvsel 57, 76, 105  
   Retrieve MNP Service Selector Command 57  
 rtrv-stpopts 72, 79, 102

## S

SCCP maintenance block 42  
 self identification of system 77  
 send status message 20  
 sequential steps to activate G-Flex 70  
 Service Module 16  
 Service Module Card Applique Memory Verification 42  
 Service Module Card Main Board Verification 42  
 Service Module card polls 17  
 Service Module card provisioning module 14  
 Service Module cards 12  
 Service Module-VxWorks-SCCP application 18  
 site planning 46  
 specify ITU national PC format 79  
 speed=10 89, 98

SRF-based MNP 10  
 srvsel commands 54  
 SS7IPGW  
   activate signaling link, act-slk 101  
   display signaling link status, rept-stat-slk 87  
 Stage 1 loading 20  
 standby EPAP 14, 17, 22, 66  
 steps to activate G-Flex 70  
 system point code 79  
 system self-identification 77

## T

TAC Regional Support Office 4  
 TCP/IP socket 19  
 TDM fixed disks 44  
 TDM-resident data tables 123  
 threshold monitoring 43  
 TOPPLE admonishment 3  
 transitions of DSM card 126  
 true point code 77  
 type=dsm 83, 89, 97

## U

UAM 128  
 UDP 19  
 Unstable Loading Mode 43  
 updates, documentation 6  
 user interface for maintenance and measurements 61  
 user interface traffic 21

## V

Validation of IGM Hardware Configuration 42  
 varying length numbers 2, 11  
 verify IS-NR card status 100  
 VSCCP 18  
 VSCCP application 42  
 VxWorks OS 18

## W

WARNING admonishment 3