

Tekelec EAGLE[®] 5 Integrated Signaling System

Release 38.0

Database Administration Manual - Gateway Screening

910-5257-001 Revision C

July 2008



**Copyright 2008 Tekelec
All Rights Reserved.
Printed in U.S.A.**

Notice

Information in this documentation is subject to change without notice. Unauthorized use, copying, or translation of this documentation can result in civil or criminal penalties.

Any export of Tekelec products is subject to the export controls of the United States and the other countries where Tekelec has operations.

No part of this documentation may be reproduced, translated, or transmitted in any form or by any means, electronic or mechanical, including photocopying or recording, for any purpose without the express written permission of an authorized representative of Tekelec.

Other product names used herein are for identification purposes only, and may be trademarks of their respective companies.

RoHS 5/6 - As of July 1, 2006, all products that comprise new installations shipped to European Union member countries will comply with the EU Directive 2002/95/EC "RoHS" (Restriction of Hazardous Substances). The exemption for lead-based solder described in the Annex will be exercised. RoHS 5/6 compliant components will have unique part numbers as reflected in the associated hardware and installation manuals.

WEEE - All products shipped to European Union member countries comply with the EU Directive 2002/96/EC, Waste Electronic and Electrical Equipment. All components that are WEEE compliant will be appropriately marked. For more information regarding Tekelec's WEEE program, contact your sales representative.

Trademarks

The Tekelec logo, EAGLE, G-Flex, G-Port, IP7, IP7 Edge, and IP7 Secure Gateway are registered trademarks of Tekelec. TekServer, A-Port, and V-FLEX are trademarks of Tekelec. All other trademarks are the property of their respective owners.

Patents

This product is covered by one or more of the following U.S. and foreign patents:

U.S. Patent Numbers:

5,732,213; 5,953,404; 6,115,746; 6,167,129; 6,324,183; 6,327,350; 6,456,845; 6,606,379; 6,639,981; 6,647,113; 6,662,017; 6,735,441; 6,745,041; 6,765,990; 6,795,546; 6,819,932; 6,836,477; 6,839,423; 6,885,872; 6,901,262; 6,914,973; 6,940,866; 6,944,184; 6,954,526; 6,954,794; 6,959,076; 6,965,592; 6,967,956; 6,968,048; 6,970,542; 6,987,781; 6,987,849; 6,990,089; 6,990,347; 6,993,038; 7,002,988; 7,020,707; 7,031,340; 7,035,239; 7,035,387; 7,043,000; 7,043,001; 7,043,002; 7,046,667; 7,050,456; 7,050,562; 7,054,422; 7,068,773; 7,072,678; 7,075,331; 7,079,524; 7,088,728; 7,092,505; 7,108,468; 7,110,780; 7,113,581; 7,113,781; 7,117,411; 7,123,710; 7,127,057; 7,133,420; 7,136,477; 7,139,388; 7,145,875; 7,146,181; 7,155,206; 7,155,243; 7,155,505; 7,155,512; 7,181,194; 7,190,702; 7,190,772; 7,190,959; 7,197,036; 7,206,394; 7,215,748; 7,219,264; 7,222,192; 7,227,927; 7,231,024; 7,242,695; 7,254,391; 7,260,086; 7,260,207; 7,283,969; 7,286,516; 7,286,647; 7,286,839; 7,295,579; 7,299,050; 7,301,910; 7,304,957; 7,318,091; 7,319,857; 7,327,670

Foreign Patent Numbers:

EP1062792; EP1308054; EP1247378; EP1303994; EP1252788; EP1161819; EP1177660; EP1169829; EP1135905; EP1364520; EP1192758; EP1240772; EP1173969; CA2352246

Ordering Information

To order additional copies of this document, contact your Tekelec Sales Representative.

Table of Contents

Chapter 1. Introduction	1-1
Overview	1-1
Manual Organization	1-2
Related Publications	1-3
Documentation Availability, Packaging, and Updates	1-3
Documentation Admonishments	1-3
Customer Care Center	1-4
Emergency Response	1-4
Maintenance and Administration Subsystem	1-5
EAGLE 5 ISS Database Partitions	1-5
Fixed Disk Drive	1-6
Removable Cartridge	1-7
Locate Product Documentation on the Customer Support Site	1-7
Chapter 2. Gateway Screening (GWS) Overview	2-1
Introduction	2-2
TUP Message Screening	2-4
Gateway Screening States	2-4
Linkset Parameters	2-5
Gateway Screening Attributes	2-5
Use of the Character “c” for the NI, NC, NCM, ZONE, AREA, ID, NPC, MSA, SSA, and SP Parameters	2-9
Specifying a Range of Values for Gateway Screening Parameters	2-9
Use of the Asterisk “*” for the ZONE, AREA, ID, MSA, SSA, and SP Parameters	2-12
User Interface Requirements	2-13
Command Summary	2-13
Enter Commands	2-14
Change Commands	2-14
Delete Commands	2-15
Retrieve Commands	2-15
14-Bit ITU National Point Code Formats	2-18
Converting Single Number 14-Bit ITU National Point Codes	2-19
Converting Multiple Part 14-Bit ITU National Point Codes	2-20
Gateway Screening Using Duplicate ITU National Point Codes	2-20
Gateway Screening Configuration	2-21
Gateway Screening Configuration Examples	2-24
Adding an GLS Card	2-35
Removing a GLS Card	2-38
Configuring Gateway Screening Stop Action Sets	2-41

Configuring TLNP Gateway Screening Stop Action Sets	2-54
Removing Gateway Screening Stop Action Sets	2-65
Setting the Threshold for Reporting Gateway Screening Activity	2-67
Setting the Maximum Number of Gateway Screening Rejected Messages	2-71
Chapter 3. Allowed Affected Point Code (AFTPC) Screen Configuration	3-1
Introduction	3-1
Adding an Allowed Affected Point Code Screen	3-3
Removing an Allowed Affected Point Code Screen	3-11
Changing an Allowed Affected Point Code Screen	3-15
Chapter 4. Allowed Called Party (CDPA) Screen Configuration	4-1
Introduction	4-1
Adding an Allowed Called Party Address Screen	4-3
Removing an Allowed Called Party Address Screen	4-13
Changing an Allowed Called Party Address Screen	4-17
Chapter 5. Allowed Translation Type (TT) Screen Configuration	5-1
Introduction	5-1
Adding an Allowed Translation Type Screen	5-4
Removing an Allowed Translation Type Screen	5-10
Changing an Allowed Translation Type Screen	5-12
Chapter 6. Allowed Calling Party (CGPA) Screen Configuration	6-1
Introduction	6-1
Adding an Allowed Calling Party Address Screen	6-6
Removing an Allowed Calling Party Address Screen	6-15
Changing an Allowed Calling Party Address Screen	6-19
Chapter 7. Allowed Affected Destination Field (DESTFLD) Screen Configuration	7-1
Introduction	7-1
Adding an Allowed Affected Destination Field Screen	7-6
Removing an Allowed Affected Destination Field Screen	7-13
Changing an Allowed Affected Destination Field Screen	7-17
Chapter 8. Blocked Destination Point Code (BLKDPC) Screen Configuration	8-1
Introduction	8-1
Adding a Blocked DPC Screen	8-7
Removing a Blocked DPC Screen	8-18
Changing a Blocked DPC Screen	8-23
Chapter 9. Allowed Destination Point Code (DPC) Screen Configuration	9-1
Introduction	9-1
Adding an Allowed DPC Screen	9-7
Removing an Allowed DPC Screen	9-19
Changing an Allowed DPC Screen	9-22
Chapter 10. Allowed Signaling Information Octet (SIO) Screen Configuration	10-1
Introduction	10-1
Adding an Allowed SIO Screen	10-8

Removing an Allowed SIO Screen	10-17
Changing an Allowed SIO Screen	10-20
Chapter 11. Blocked Originating Point Code (BLKOPC) Screen Configuration	11-1
Introduction	11-1
Adding a Blocked OPC Screen	11-7
Removing a Blocked OPC Screen	11-19
Changing a Blocked OPC Screen	11-24
Chapter 12. Allowed Originating Point Code (OPC) Screen Configuration	12-1
Introduction	12-1
Adding an Allowed OPC Screen	12-7
Removing an Allowed OPC Screen	12-19
Changing an Allowed OPC Screen	12-22
Chapter 13. Screen Set Configuration	13-1
Introduction	13-1
Automatic Destination Field Screening	13-1
Adding a Screen Set	13-2
Removing a Screen Set	13-9
Changing a Screen Set	13-11
Chapter 14. Calling Name Conversion Facility (CNCf) Configuration	14-1
Introduction	14-1
Configuring the EAGLE 5 ISS for the CNCf Feature	14-3
Chapter 15. Allowed ISUP Message Type Screen Configuration	15-1
Introduction	15-1
TUP Message Screening	15-2
Adding an Allowed ISUP Message Type Screen	15-8
Removing an Allowed ISUP Message Type Screen	15-14
Changing an Allowed ISUP Message Type Screen	15-17
Glossary	Glossary-1
Index	Index-1

List of Figures

- Figure 1-1.** EAGLE 5 ISS Database Partitions..... 1-6
- Figure 2-1.** Sample Network Showing Gateway Screening Using Duplicate ITU
National Point Codes..... 2-21
- Figure 2-2.** The Gateway Screening Process..... 2-24
- Figure 2-3.** Gateway Screening Configuration - Example 1..... 2-26
- Figure 2-4.** Gateway Screening Configuration - Example 2..... 2-28
- Figure 2-5.** Gateway Screening Configuration - Example 3..... 2-29
- Figure 2-6.** Gateway Screening Configuration - Example 4..... 2-31
- Figure 2-7.** Gateway Screening Configuration - Example 5..... 2-32
- Figure 2-8.** Gateway Screening Configuration - Example 6..... 2-33
- Figure 2-9.** Gateway Screening Configuration - Example 7..... 2-35
- Figure 3-1.** Allowed Affected Point Code Screening Function..... 3-2
- Figure 4-1.** Allowed Called Party Address Screening Function..... 4-2
- Figure 5-1.** Allowed Translation Type Screening Function..... 5-2
- Figure 6-1.** Allowed Calling Party Address Screening Function..... 6-4
- Figure 7-1.** Allowed Affected Destination Field Screening Function..... 7-5
- Figure 8-1.** Blocked DPC Screening Functions..... 8-6
- Figure 9-1.** Allowed DPC Screening Functions..... 9-6
- Figure 10-1.** Allowed SIO Screening Function..... 10-7
- Figure 11-1.** Blocked OPC Screening Functions..... 11-6
- Figure 12-1.** Allowed OPC Screening Functions..... 12-6
- Figure 14-1.** PIP/GN Parameter Conversion..... 14-2
- Figure 14-2.** CNCF Gateway Screening Configuration - Example 1..... 14-4
- Figure 14-3.** CNCF Gateway Screening Configuration - Example 2..... 14-4
- Figure 14-4.** CNCF Gateway Screening Configuration - Example 3..... 14-5
- Figure 14-5.** CNCF Gateway Screening Configuration - Example 4..... 14-6
- Figure 15-1.** Allowed ISUP Message Type Screening Function..... 15-7

List of Tables

Table 1-1. Admonishments.....	1-3
Table 2-1. Valid Value Combinations for ANSI Point Code Parameters	2-10
Table 2-2. Valid Value Combinations for H0 and H1 Parameters.....	2-10
Table 2-3. Valid Parameter Combinations for ANSI Point Code Parameters.....	2-11
Table 2-4. Valid Value Combinations for ITU-I Point Code Parameters	2-12
Table 2-5. Valid Value Combinations for 24-Bit ITU-N Point Code Parameters	2-12
Table 2-6. Valid Parameter Combinations for ITU-I Point Code Parameters.....	2-12
Table 2-7. Valid Parameter Combinations for 24-bit ITU-N Point Code Parameters.....	2-12
Table 2-8. Gateway Screening Process and Provisioning Order.....	2-23
Table 2-9. Gateway Screening Stop Action Definitions If the CNCF Feature Is Off.....	2-42
Table 2-10. Gateway Screening Stop Action Definitions If the CNCF Feature Is On.....	2-43
Table 2-11. Sample Gateway Screening Stop Action Set Configuration.....	2-44
Table 2-12. Sample TLNP Gateway Screening Stop Action Set Configuration.....	2-55
Table 3-1. Example Gateway Screening Allowed AFTPC Configuration Table.....	3-4
Table 3-2. Valid Value Combinations for ANSI Point Code Parameters.....	3-4
Table 3-3. Valid Value Combinations for ITU-I Point Code Parameters.....	3-4
Table 3-4. Valid Value Combinations for 24-Bit ITU-N Point Code Parameters.....	3-5
Table 3-5. Valid Value Combinations for ANSI Point Code Parameters.....	3-15
Table 3-6. Valid Value Combinations for ITU-I Point Code Parameters	3-16
Table 3-7. Valid Value Combinations for 24-Bit ITU-N Point Code Parameters	3-16
Table 4-1. Example Gateway Screening Allowed CDPA Configuration Table.....	4-4
Table 4-2. Valid Value Combinations for ANSI Point Code Parameters.....	4-4
Table 4-3. Valid Value Combinations for ITU-I Point Code Parameters.....	4-5
Table 4-4. Valid Value Combinations for 24-Bit ITU-N Point Code Parameters.....	4-5
Table 4-5. CDPA Parameter Combinations.....	4-8
Table 4-6. Valid Value Combinations for ANSI Point Code Parameters	4-18
Table 4-7. Valid Value Combinations for ITU-I Point Code Parameters	4-19
Table 4-8. Valid Value Combinations for 24-Bit ITU-N Point Code Parameters	4-19
Table 4-9. CDPA Parameter Combinations.....	4-22
Table 5-1. Example Gateway Screening Allowed TT Configuration Table.....	5-4
Table 6-1. Valid Parameter Combinations for the Allowed CGPA Screening Function.....	6-2
Table 6-2. Example Gateway Screening Allowed CGPA Configuration Table.....	6-6
Table 6-3. Valid Value Combinations for ANSI Point Code Parameters.....	6-7
Table 6-4. Valid Value Combinations for ITU-I Point Code Parameters.....	6-7
Table 6-5. Valid Value Combinations for 24-Bit ITU-N Point Code Parameters.....	6-7
Table 6-6. Valid Value Combinations for ANSI Point Code Parameters.....	6-20
Table 6-7. Valid Value Combinations for ITU-I Point Code Parameters.....	6-21

Table 6-8.	Valid Value Combinations for 24-Bit ITU-N Point Code Parameters.....	6-21
Table 6-9.	CGPA Parameter Combinations.....	6-24
Table 7-1.	Example Gateway Screening Allowed DESTFLD Configuration Table.....	7-6
Table 7-2.	Valid Value Combinations for ANSI Point Code Parameters.....	7-7
Table 7-3.	Valid Value Combinations for ITU-I Point Code Parameters.....	7-7
Table 7-4.	Valid Value Combinations for 24-Bit ITU-N Point Code Parameters.....	7-7
Table 7-5.	Valid Value Combinations for ANSI Point Code Parameters.....	7-18
Table 7-6.	Valid Value Combinations for ITU-I Point Code Parameters	7-18
Table 7-7.	Valid Value Combinations for 24-Bit ITU-N Point Code Parameters	7-19
Table 8-1.	Example Gateway Screening Blocked DPC Configuration Table.....	8-7
Table 8-2.	Valid Value Combinations for ANSI Point Code Parameters.....	8-9
Table 8-3.	Valid Value Combinations for ITU-I Point Code Parameters.....	8-9
Table 8-4.	Valid Value Combinations for 24-Bit ITU-N Point Code Parameters.....	8-9
Table 8-5.	Valid Value Combinations for ANSI Point Code Parameters.....	8-25
Table 8-6.	Valid Value Combinations for ITU-I Point Code Parameters.....	8-25
Table 8-7.	Valid Value Combinations for 24-Bit ITU-N Point Code Parameters.....	8-25
Table 9-1.	Example Gateway Screening Allowed DPC Configuration Table.....	9-7
Table 9-2.	Valid Value Combinations for ANSI Point Code Parameters.....	9-9
Table 9-3.	Valid Value Combinations for ITU-I Point Code Parameters.....	9-9
Table 9-4.	Valid Value Combinations for 24-Bit ITU-N Point Code Parameters.....	9-9
Table 9-5.	Valid Value Combinations for ANSI Point Code Parameters.....	9-24
Table 9-6.	Valid Value Combinations for ITU-I Point Code Parameters	9-24
Table 9-7.	Valid Value Combinations for 24-Bit ITU-N Point Code Parameters	9-24
Table 10-1.	Valid Parameter Combinations for the Allowed SIO Screening Function.....	10-2
Table 10-2.	Example Gateway Screening Allowed SIO Configuration Table.....	10-9
Table 10-3.	Valid Value Combinations for H0 and H1 Parameters.....	10-10
Table 10-4.	Valid Value Combinations for H0 and H1 Parameters.....	10-22
Table 11-1.	Example Gateway Screening Blocked OPC Configuration Table.....	11-7
Table 11-2.	Valid Value Combinations for ANSI Point Code Parameters.....	11-9
Table 11-3.	Valid Value Combinations for ITU-I Point Code Parameters	11-9
Table 11-4.	Valid Value Combinations for 24-Bit ITU-N Point Code Parameters	11-9
Table 11-5.	Valid Value Combinations for ANSI Point Code Parameters.....	11-25
Table 11-6.	Valid Value Combinations for ITU-I Point Code Parameters.....	11-26
Table 11-7.	Valid Value Combinations for 24-Bit ITU-N Point Code Parameters.....	11-26
Table 12-1.	Example Gateway Screening Allowed OPC Configuration Table.....	12-7
Table 12-2.	Valid Value Combinations for ANSI Point Code Parameters.....	12-9
Table 12-3.	Valid Value Combinations for ITU-I Point Code Parameters.....	12-9
Table 12-4.	Valid Value Combinations for 24-Bit ITU-N Point Code Parameters.....	12-9
Table 12-5.	Valid Value Combinations for ANSI Point Code Parameters.....	12-23
Table 12-6.	Valid Value Combinations for ITU-I Point Code Parameters.....	12-23
Table 12-7.	Valid Value Combinations for 24-Bit ITU-N Point Code Parameters.....	12-24
Table 13-1.	Example Gateway Screening Screen Set Configuration Table.....	13-2
Table 14-1.	ISUP IAM Message Conversion Examples.....	14-2
Table 14-2.	Example Gateway Screening Allowed DPC Configuration Table for the CNCF Feature.....	14-9

Table 14-3. Example Gateway Screening Allowed SIO Configuration Table for the CNCF Feature..... 14-10

Table 14-4. Example Gateway Screening Allowed OPC Configuration Table for the CNCF Feature..... 14-11

Table 14-5. Example Gateway Screening Screen Set Configuration Table for the CNCF Feature..... 14-11

Table 14-6. Linkset Configuration Table for the CNCF Feature..... 14-12

Table 15-1. Example Gateway Screening Allowed ISUP Configuration Table..... 15-9

List of Flowcharts

Flowchart 1. Adding an GLS Card to the Database.....	2-38
Flowchart 2. Removing a GLS Card.....	2-41
Flowchart 3. Configuring Gateway Screening Stop Action Sets.....	2-48
Flowchart 4. Configuring TLNP Gateway Screening Stop Action Sets.....	2-61
Flowchart 5. Removing Gateway Screening Stop Action Sets.....	2-67
Flowchart 6. Setting the Threshold for Reporting Gateway Screening Activity.....	2-70
Flowchart 7. Setting the Maximum Number of Gateway Screening Rejected Messages.....	2-72
Flowchart 8. Allowed AFTPC Screening Action.....	3-2
Flowchart 9. Adding an Allowed Affected Point Code Screen	3-9
Flowchart 10. Removing an Allowed Affected Point Code Screen.....	3-14
Flowchart 11. Changing an Allowed Affected Point Code Screen.....	3-20
Flowchart 12. Allowed CDPA Screening Action.....	4-2
Flowchart 13. Adding an Allowed Called Party Address Screen.....	4-10
Flowchart 14. Removing an Allowed Called Party Address Screen	4-16
Flowchart 15. Changing an Allowed Called Party Address Screen.....	4-24
Flowchart 16. Allowed TT Screening Action.....	5-2
Flowchart 17. Adding an Allowed Translation Type Screen	5-8
Flowchart 18. Removing an Allowed Translation Type Screen	5-12
Flowchart 19. Changing an Allowed Translation Type Screen	5-16
Flowchart 20. Allowed CGPA Screening Action.....	6-3
Flowchart 21. Adding an Allowed Calling Party Address Screen.....	6-12
Flowchart 22. Removing an Allowed Calling Party Address Screen	6-18
Flowchart 23. Changing an Allowed Calling Party Address Screen.....	6-25
Flowchart 24. Allowed Affected Destination Screening Action	7-3
Flowchart 25. Adding an Allowed Affected Destination Field Screen	7-11
Flowchart 26. Removing an Allowed Affected Destination Field Screen.....	7-16
Flowchart 27. Changing an Allowed Affected Destination Field Screen.....	7-22
Flowchart 28. Blocked DPC Screening Action.....	8-2
Flowchart 29. Adding a Blocked DPC Screen.....	8-14
Flowchart 30. Removing a Blocked DPC Screen.....	8-22
Flowchart 31. Changing a Blocked DPC Screen.....	8-30
Flowchart 32. Allowed DPC Screening Action.....	9-2
Flowchart 33. Adding an Allowed DPC Screen.....	9-15
Flowchart 34. Removing an Allowed DPC Screen	9-22
Flowchart 35. Changing an Allowed DPC Screen	9-29

Flowchart 36.	Allowed SIO Screening Action.....	10-3
Flowchart 37.	Adding an Allowed SIO Screen.....	10-15
Flowchart 38.	Removing an Allowed SIO Screen	10-20
Flowchart 39.	Changing an Allowed SIO Screen	10-25
Flowchart 40.	Blocked OPC Screening Action.....	11-2
Flowchart 41.	Adding a Blocked OPC Screen.....	11-15
Flowchart 42.	Removing a Blocked OPC Screen.....	11-23
Flowchart 43.	Changing a Blocked OPC Screen.....	11-30
Flowchart 44.	Allowed OPC Screening Action.....	12-2
Flowchart 45.	Adding an Allowed OPC Screen.....	12-15
Flowchart 46.	Removing an Allowed OPC Screen.....	12-21
Flowchart 47.	Changing an Allowed OPC Screen	12-28
Flowchart 48.	Adding a Screen Set.....	13-7
Flowchart 49.	Removing a Screen Set.....	13-11
Flowchart 50.	Changing a Screen Set.....	13-15
Flowchart 51.	Calling Name Conversion Facility Configuration	14-13
Flowchart 52.	Allowed ISUP Message Type Screening Action	15-3
Flowchart 53.	Adding an Allowed ISUP Message Type Screen	15-12
Flowchart 54.	Removing an Allowed ISUP Message Type Screen.....	15-17
Flowchart 55.	Changing an Allowed ISUP Message Type Screen.....	15-20

Introduction

Overview	1-1
Manual Organization	1-2
Related Publications	1-3
Documentation Availability, Packaging, and Updates	1-3
Documentation Admonishments	1-3
Customer Care Center	1-4
Emergency Response	1-4
Maintenance and Administration Subsystem	1-5
EAGLE 5 ISS Database Partitions	1-5
Fixed Disk Drive	1-6
Removable Cartridge	1-7
Locate Product Documentation on the Customer Support Site	1-7

Overview

The *Database Administration Manual – Gateway Screening* describes the procedures necessary for database administration personnel or translations personnel to configure the EAGLE 5 ISS and its database to implement the Gateway Screening Feature.

The Gateway Screening (GWS) feature examines a Message Signaling Unit (MSU) attempting to enter the EAGLE 5 ISS against predefined criteria in the EAGLE 5 ISS database to determine whether the MSU should be allowed to enter. The screening functions are defined by using screening tables or screen sets containing a set of rules. Each screen set is uniquely identified by a screen set name. Each rule in the screen set is identified by a screening reference name. Each screening reference belongs to a specific category, which indicates the criteria used to either accept or reject an incoming MSU. Gateway screening tables provide screening of MTP messages on Link Interface Modules (LIMs) and SCCP messages on Translation Services Modules (TSMs) or Database Services Module (DSMs).

NOTE: Before enabling any the Gateway Screening feature, make sure you have purchased this feature to be turned on. If you are not sure whether you have purchased this feature to be turned on, contact your Tekelec Sales Representative or Account Representative.

NOTE: Database administration privileges are password restricted. Only those persons with access to the command class “Database Administration” can execute the administrative functions. Refer to the *Commands Manual* for more information on command classes and commands allowed by those classes.

It is possible for two or more users to make changes to the same database element at any time during their database administration sessions. It is strongly recommended that only one user at a time make any changes to the database.

Manual Organization

Throughout this document, the terms database and system software are used. Database refers to all data that can be administered by the user, including shelves, cards, links, routes, global title translation tables, and gateway screening tables. System software refers to data that cannot be administered by the user, including generic program loads (GPLs).

This document is organized into the following sections.

[Chapter 1 Introduction](#) contains general information about the gateway screening feature, the database, and the organization of this manual.

[Chapter 2 Gateway Screening \(GWS\) Overview](#) contains an overview of the Gateway screening feature and the procedures for provisioning the GLS card, gateway screening stop action sets, the threshold for gateway screening activity, and the maximum number of gateway screening rejected messages.

[Chapter 3 Allowed Affected Point Code \(AFTPC\) Screen Configuration](#) contains the procedures necessary to configure allowed affected point code screens.

[Chapter 4 Allowed Called Party \(CDPA\) Screen Configuration](#) contains the procedures necessary to configure allowed called party address screens.

[Chapter 5 Allowed Translation Type \(TT\) Screen Configuration](#) contains the procedures necessary to configure allowed translation type screens.

[Chapter 6 Allowed Calling Party \(CGPA\) Screen Configuration](#) contains the procedures necessary to configure allowed calling party address screens.

[Chapter 7 Allowed Affected Destination Field \(DESTFLD\) Screen Configuration](#) contains the procedures necessary to configure allowed affected destination field screens.

[Chapter 8 Blocked Destination Point Code \(BLKDPC\) Screen Configuration](#) contains the procedures necessary to configure blocked destination point code screens.

[Chapter 9 Allowed Destination Point Code \(DPC\) Screen Configuration](#) contains the procedures necessary to configure allowed destination point code screens.

[Chapter 10 Allowed Signaling Information Octet \(SIO\) Screen Configuration](#) contains the procedures necessary to configure allowed signaling information octet screens.

[Chapter 11 Blocked Originating Point Code \(BLKOPC\) Screen Configuration](#) contains the procedures necessary to configure blocked originating point code screens.

[Chapter 12 Allowed Originating Point Code \(OPC\) Screen Configuration](#) contains the procedures necessary to configure allowed originating point code screens.

[Chapter 13 Screen Set Configuration](#) contains the procedures necessary to configure screen sets.

[Chapter 14 Calling Name Conversion Facility \(CNCF\) Configuration](#) contains a description of the Calling Name Conversion Facility feature the procedure necessary to configure this feature.

[Chapter 15 Allowed ISUP Message Type Screen Configuration](#) contains the procedures necessary to configure allowed ISUP message type screens.

Related Publications

For information about additional publications that are related to this document, refer to the *Related Publications* document. The *Related Publications* document is published as a part of the *Release Documentation* and is also published as a separate document on the Tekelec Customer Support Site.

Documentation Availability, Packaging, and Updates

Tekelec provides documentation with each system and in accordance with contractual agreements. For General Availability (GA) releases, Tekelec publishes a complete EAGLE 5 ISS documentation set. For Limited Availability (LA) releases, Tekelec may publish a documentation subset tailored to specific feature content or hardware requirements. Documentation Bulletins announce a new or updated release.

The Tekelec EAGLE 5 ISS documentation set is released on an optical disc. This format allows for easy searches through all parts of the documentation set.

The electronic file of each manual is also available from the Tekelec Customer Support site. This site allows for 24-hour access to the most up-to-date documentation.

Printed documentation is available for GA releases on request only and with a lead time of four weeks. The printed documentation set includes pocket guides for commands and alarms. Pocket guides may also be ordered as a set or individually. Exceptions to printed documentation are:

- Hardware or Installation manuals are printed only without the linked attachments found in the electronic version of the manuals.
- The Release Notice is available only on the Customer Support site.

NOTE: Customers may print a reasonable number of each manual for their own use.

Documentation is updated when significant changes are made that affect system operation. Updates resulting from Severity 1 and 2 PRs are made to existing manuals. Other changes are included in the documentation for the next scheduled release. Updates are made by re-issuing an electronic file to the customer support site. Customers with printed documentation should contact their Sales Representative for an addendum. Occasionally, changes are communicated first with a Documentation Bulletin to provide customers with an advanced notice of the issue until officially released in the documentation. Documentation bulletins are posted on the Customer Support site and can be viewed per product and release.

Content changes are indicated with change bars, the revision of the manual part number is incremented, and the month of publication is updated.

Documentation Admonishments

Admonishments are icons and text throughout this manual that alert the reader to assure personal safety, to minimize possible service interruptions, and to warn of the potential for equipment damage.

Table 1-1. Admonishments

	<p>DANGER:</p>
---	-----------------------

	(This icon and text indicate the possibility of <i>personal injury</i> .)
	WARNING: (This icon and text indicate the possibility of <i>equipment damage</i> .)
	CAUTION: (This icon and text indicate the possibility of <i>service interruption</i> .)

Customer Care Center

The Tekelec Customer Care Center offers a point of contact for product and service support through highly trained engineers or service personnel. The Tekelec Customer Care Center is available 24 hours a day, 7 days a week at the following locations:

- Tekelec, USA
 Phone:
 +1 888 367 8552 (US and Canada only)
 +1 919 460 2150 (international)
 Email: support@tekelec.com
- Tekelec, Europe
 Phone: +44 1784 467804
 Email: ecsc@tekelec.com

When a call is received, a Customer Service Report (CSR) is issued to record the request for service. Each CSR includes an individual tracking number.

After a CSR is issued, the Customer Care Center determines the classification of the trouble. If a critical problem exists, emergency procedures are initiated. If the problem is not critical, information regarding the serial number of the system, COMMON Language Location Identifier (CLLD), initial problem symptoms (includes outputs and messages) is recorded. A primary Customer Care Center engineer is also assigned to work on the CSR and provide a solution to the problem. The CSR is closed when the problem is resolved.

Emergency Response

In the event of a critical service situation, emergency response is offered by the Tekelec Customer Care Center 24 hours a day, 7 days a week. The emergency response provides immediate coverage, automatic escalation, and other features to ensure that the critical situation is resolved as rapidly as possible.

A critical situation is defined as a problem with an EAGLE 5 ISS that severely affects service, traffic, or maintenance capabilities, and requires immediate corrective action. Critical problems affect service and/or system operation resulting in:

- A total system failure that results in loss of all transaction processing capability
- Significant reduction in system capacity or traffic handling capability

- Loss of the system's ability to perform automatic system reconfiguration
- Inability to restart a processor or the system
- Corruption of system databases that requires service affecting corrective actions
- Loss of access for maintenance or recovery operations
- Loss of the system ability to provide any required critical or major trouble notification

Any other problem severely affecting service, capacity/traffic, billing, and maintenance capabilities may be defined as critical by prior discussion and agreement with the Tekelec Customer Care Center.

Maintenance and Administration Subsystem

The maintenance and administration subsystem consists of two processors, MASP (maintenance and administration subsystem processor) A and MASP B.

Each MASP is made up of two cards, the GPSM-II card (general purpose service module) and the TDM (terminal disk module).





The GPSM-II card contains the communications processor and applications processor and provides connections to the IMT bus. The GPSM-II controls the maintenance and database administration activity.

The TDM contains the fixed disk drive, the terminal processor for the 16 serial I/O ports and interfaces to the MDAL (maintenance disk and alarm) card which contains the removable cartridge drive and alarm logic. There is only one MDAL card in the maintenance and administration subsystem and it is shared between the two MASPs.

For more information on these cards, go to the *Hardware Manual - EAGLE 5 ISS* .

EAGLE 5 ISS Database Partitions

The data that the EAGLE 5 ISS uses to perform its functions are stored in two separate areas: the fixed disk drives, and the removable cartridge. The following sections describe these areas and data that is stored on them. These areas and their partitions are shown in [Figure 1-1](#) .

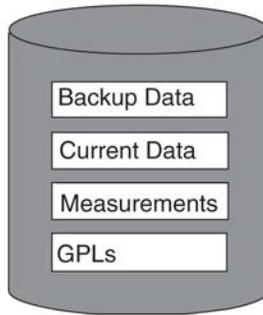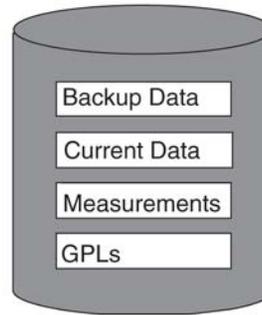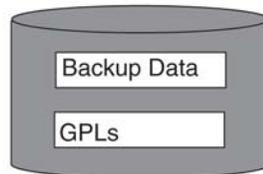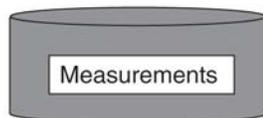Figure 1-1. EAGLE 5 ISS Database Partitions**ACTIVE FIXED DISK****STANDBY FIXED DISK****System Data
Removable
Cartridge****Measurements
Removable
Cartridge****Fixed Disk Drive**

There are two fixed disk drives on the EAGLE 5 ISS. The fixed disk drives contain the “master” set of data and programs for the EAGLE 5 ISS. The two fixed disk drives are located on the terminal disk modules (TDMs). Both disks have the same files. The data stored on the fixed disks is partially replicated on the various cards in the EAGLE 5 ISS. Changes made during database administration sessions are sent to the appropriate cards.

The data on the fixed disks can be viewed as four partitions.

- Current partition
- Backup partition
- Measurements partition
- Generic program loads (GPLs) partition

The data which can be administered by users is stored in two partitions on the fixed disk, a current database partition which has the tables which are changed by on-line administration, and a backup database partition which is a user-controlled copy of the current partition.

All of the on-line data administration commands effect the data in the current partition. The purpose of the backup partition is to provide the users with a means of rapidly restoring the database to a known good state if there has been a problem while changing the current partition.

A full set of GPLs is stored on the fixed disk, in the GPL partition. There is an approved GPL and a trial GPL for each type of GPL in this set and a utility GPL, which has only an approved version. Copies of these GPLs are downloaded to the EAGLE 5 ISS cards. The GPL provides each card with its functionality. For example, the **ss7ansi** GPL provides MTP functionality for link interface modules (LIMs).

Measurement tables are organized as a single partition on the fixed disk. These tables are used as holding areas for the measurement counts.

Removable Cartridge

A removable cartridge is used for two purposes.

- To hold an off-line backup copy of the administered data and system GPLs
- To hold a copy of the measurement tables

Because of the size of the data stored on the fixed disk drives on the TDMs, a single removable cartridge cannot store all of the data in the database, GPL and measurements partitions.

To use a removable cartridge to hold the system data, it must be formatted for system data. To use a removable cartridge to hold measurements data, it must be formatted for measurements data. The EAGLE 5 ISS provides the user the ability to format a removable cartridge for either of these purposes. A removable cartridge can be formatted on the EAGLE 5 ISS by using the **format-disk** command. More information on the **format-disk** command can be found in the *Commands Manual*. More information on the removable cartridge drives can be found in the *Hardware Manual - EAGLE 5 ISS*.

The removable cartridge drive is located on the MDAL card in card location 1117.

Additional and preformatted removable cartridges are available from the [Customer Care Center](#).

Locate Product Documentation on the Customer Support Site

To view or download product documentation, log into the Tekelec Customer Support site at:

<https://support.tekelec.com/index.asp>

1. Log in with your user name and password. (Click on **Need an Account?** if you need to register).
2. Select **EAGLE** from the Product Support menu.
3. Select the release number from the Release menu.
4. Locate the Notices section to view the latest Feature Notice.
5. Locate the Manuals section to view all manuals applicable to this release.

The documentation is listed in alphabetical order by the manual name. Only the first three manuals display. Click **more...** to see the remaining manuals.

6. Locate the latest revision of the manual name.

Confirm the release number and last available revision.

Select the 936-xxxx-x01 part number to download the complete documentation set with all linked files.

NOTE: The electronic file for this part number is quite large.

7. To view a manual, double-click the manual name.
8. To download a manual, right-click and select **Save Target As**.

NOTE: Customers may print a reasonable number of each manual for their own use.

Gateway Screening (GWS) Overview

Introduction	2-2
TUP Message Screening	2-4
Gateway Screening States	2-4
Linkset Parameters	2-5
Gateway Screening Attributes	2-5
Use of the Character “c” for the NI, NC, NCM, ZONE, AREA, ID, NPC, MSA, SSA, and SP Parameters	2-9
Specifying a Range of Values for Gateway Screening Parameters	2-9
Use of the Asterisk “*” for the ZONE, AREA, ID, MSA, SSA, and SP Parameters	2-12
User Interface Requirements	2-13
Command Summary	2-13
Enter Commands	2-14
Change Commands	2-14
Delete Commands	2-15
Retrieve Commands	2-15
14-Bit ITU National Point Code Formats	2-18
Converting Single Number 14-Bit ITU National Point Codes	2-19
Converting Multiple Part 14-Bit ITU National Point Codes	2-20
Gateway Screening Using Duplicate ITU National Point Codes	2-20
Gateway Screening Configuration	2-21
Gateway Screening Configuration Examples	2-24
Adding an GLS Card	2-35
Removing a GLS Card	2-38
Configuring Gateway Screening Stop Action Sets	2-41
Configuring TLNP Gateway Screening Stop Action Sets	2-54
Removing Gateway Screening Stop Action Sets	2-65
Setting the Threshold for Reporting Gateway Screening Activity	2-67
Setting the Maximum Number of Gateway Screening Rejected Messages	2-71

Introduction

This chapter provides an overview of the gateway screening feature and procedures for provisioning these items in the database:

- GLS cards
- Gateway screening stop action sets
- The threshold for gateway screening activity
- Setting the maximum number of gateway screening rejected messages

The gateway screening tables are loaded onto Link Interface Modules (LIMs) or SCCP cards. SCCP cards can be any of these cards:

- Translation Services Modules (TSMs)
- Database Services Modules (DSMs).

The use of the TSMs or DSMs in the EAGLE 5 ISS is dependent on the combination of global title translation features that are being used in the EAGLE 5 ISS. For more information on the global title translation features, go to the *Database Administration Manual - Global Title Translation*.

The gateway screening tables provide screening of MTP (LIMs) and SCCP () messages.

MTP Screening consists of the following items:

- Allowed Originating Point Code (OPC)
- Blocked Originating Point Code (BLKOPC)
- Allowed Signaling Information Octet (SIO)
- Allowed Destination Point Code (DPC)
- Blocked Destination Point Code (BLKDPC)
- Allowed Affected Destination Field (DESTFLD)
- Allowed ISUP Message Type (ISUP) - ISUP and TUP messages can be screened by the allowed ISUP message type screen.

SCCP Screening consists of the following items:

- Allowed Calling Party Address (CGPA)
- Allowed Translation Type (TT)
- Allowed Called Party Address (CDPA)
- Allowed Affected Point Code (AFTPC).

The procedures shown in this manual use a variety of commands. If more information than what is shown in these procedures is needed, go to the *Commands Manual* to find the required information.

The EAGLE 5 ISS's role in the SS7 network is to provide SS7 message transport between originating and destination signaling points. EAGLE 5 ISSs that route messages to and from other networks also perform gateway screening. The screening process results in a message being accepted into the network or rejected. The criteria for message screening depends on the type of message received by the EAGLE 5 ISS, and the contents of the EAGLE 5 ISS screening tables.

Gateway screening functions on the EAGLE 5 ISS reside within the LIM and the SCCP cards and are defined using screening tables or screen sets which contain a set of rules. Each screen set is uniquely identified by a screen

set name. Each rule in the screen set is identified by a screening reference name. Each screening reference belongs to a specific category, which indicates the criteria that is used to either accept or reject an incoming MSU. For example, the category **blkopc** rejects all MSUs with the OPCs specified in the screening reference. The screening parameters (point codes, routing indicator, subsystem number, etc.) are used to match information in the SS7 message. The screening data is defined by the attributes discussed in the [Gateway Screening Attributes](#) section.

Each group of screening references is referred to as a screen set and is identified by a particular screen set name (**scrn**). The screen set is applied to a particular linkset. This allows the capability, for example, for specific OPCs with particular SIOs and DPCs to be allowed into the network.

With the SEAS interface, the screen set function is performed by a gateway linkset. A gateway linkset combines the functions of a gateway screening screen set and an SS7 linkset specifying the **gwsa=on** and **scrn** parameters. Like an EAGLE 5 ISS gateway screening screen set, a gateway linkset defines the screening references that are to be used to screen the messages on the linkset. It also defines the linkset whose messages are to be screened. A gateway linkset can only be configured from a SEAS terminal and not from an EAGLE 5 ISS terminal. The linkset attributes of a gateway linkset can be displayed on an EAGLE 5 ISS terminal with the **rtrv-ls** command. A gateway linkset is shown by the entry **SEAS** in the **SCRN** field of the **rtrv-ls** command output. The gateway screening portion of the gateway linkset can only be displayed on the SEAS interface.

There are two basic functions, allow and block. In an allowed screen (for example, allowed DPC), if a match is found and the next screening function identifier (**nsfi**) is equal to anything but **stop**, the next screening reference (**nsr**) is identified and the screening process continues to the next screen identified by the **nsfi** and **nsr** parameters. If the next screening function identifier is **stop**, the message is processed and no further screening takes place. If no match is found, the message is rejected.

In a blocked screen (for example, blocked DPC), if a match is found and the next screening function identifier is **fail**, the message is rejected and no further screening takes place. If no match is found and the next screening function identifier is equal to anything but **stop**, the next screening reference is identified and the screening process continues to the next screen identified by the **nsfi** and **nsr** parameters. If the next screening function identifier is equal to **stop**, the message is processed and no further screening takes place.

When the screening process stops, other actions can be assigned to the screen set. These actions, called gateway screening stop actions, define the actions the EAGLE 5 ISS can perform on the MSU that passes gateway screening. For more information on configuring gateway screening stop actions, go to the [Configuring Gateway Screening Stop Action Sets](#) procedure. The EAGLE 5 ISS currently uses these gateways screening stop actions.

- **COPY** – copy the MSU for the STPLAN feature
- **RDCT** – redirect the MSU for the DTA feature
- **CNCF** – convert the PIP parameter with the GN parameter or the GN parameter with the PIP parameter in the ISUP IAM message for the Calling Name Conversion Facility feature.
- **TLNP** – ISUP IAMs that pass gateway screening are processed either by the ISUP NP with EPAP feature (if the ISUP NP with EPAP feature is enabled and turned on) or by the Triggerless LNP feature (if the Triggerless LNP feature is turned on).
- **TINP** – ISUP IAMs that pass gateway screening are intercepted by the Triggerless ISUP based Number Portability (TINP) feature and converted to include the routing number (RN) if the call is to a ported number. This gateway screening stop action can be specified only if the TINP feature is enabled.

The allowed OPC and DPC screens are useful in the gateway screening process when specifying particular sets of point codes that are allowed to send messages to another network or receive messages from another network. The blocked OPC and DPC screens are useful in the gateway screening process specifying particular sets of point codes that are not allowed to send SS7 messages to another network or receive SS7 messages from another network.

TUP Message Screening

TUP messages are screened using the Allowed ISUP Message Type screen. The TUP protocol is an obsolete predecessor to the ISUP protocol that remains in use in some areas. To screen for TUP messages, a screen set must be defined to screen for messages containing the service indicator value of 4. This is accomplished by defining an allowed SIO screen in the screen set containing the **si=4** parameter.

Since both ISUP and TUP messages are screened using the allowed ISUP message type screen, it is recommended that the screen set contain an allowed SIO screen to screen for ISUP messages, messages containing the service indicator value of 5. Each of these entries in the allowed SIO screen should have separate next screening functions. This allows the screening rules after the allowed SIO screen to have two separate streams, one that ends with screening ISUP messages, the other that ends with screening TUP messages.

The TUP messages can be screened for point codes before, with the allowed and blocked OPC screens, and after the SIO screen, with the allowed and blocked DPC screens. However, if the screen set does not contain an allowed SIO screen that screens for TUP messages (messages with the service indicator value of 4), the message will be treated by the allowed ISUP message type screen as an ISUP message.

The following commands show how a screen set can be provisioned to screen for TUP and ISUP messages.

```
ent-scr-isup:sr=is01:isupmt=10:nsfi=stop
ent-scr-isup:sr=tu01:tupmt=1:nsfi=stop
ent-scr-dpc:sr=dpc4:ni=1:nc=2:ncm=3:nsfi=isup:nsr=tu01
ent-scr-dpc:sr=dpc5:ni=7:nc=1:ncm=0:nsfi=isup:nsr=is01
ent-scr-sio:sr=si02:nic=2:pri=0:si=4:nsfi=dpc:nsr=dpc4
ent-scr-sio:sr=si02:nic=2:pri=0:si=5:nsfi=dpc:nsr=dpc5
ent-scrset:scrn=ist2:nsr=si02:nsfi=sio
```

In this example screen set configuration, messages are screened by the allowed SIO screen **si02** for either ISUP or TUP messages. ISUP messages are further screened by the allowed DPC screen **dpc5** and TUP messages are screened by the allowed DPC screen **dpc4**. The ISUP messages containing the ANSI point code 001-002-003 are passed onto the allowed ISUP screen **is01**. The TUP messages containing the ANSI point code 007-001-000 are passed onto the allowed ISUP screen **tu01**.

NOTE: The gateway screening rules are entered in reverse of the order that the screening process takes place.

Gateway Screening States

Gateway screening on a particular linkset can be set to function in one of four states:

NO SCREENING – Screening is not performed. All message signaling units (MSUs) are passed. This state is set by the **gwsa=off** and **gws=off** parameters of the **ent-ls** or **chg-ls** commands.

SCREEN AND REPORT – Screening is performed. When an MSU fails screening it is discarded, an output message is generated, and measurements are pegged. This state is set by the **gwsa=on** and **gws=on** parameters of the **ent-ls** or **chg-ls** commands.

SCREEN AND DON'T REPORT – Screening is performed. When an MSU fails screening it is discarded and measurements are pegged, but no output message is generated. This state is set by the **gwsa=on** and **gws=off** parameters of the **ent-ls** or **chg-ls** commands.

SCREEN TEST MODE – Screening is performed, but all MSUs are passed. When an MSU fails screening, an output message is generated, but the MSU is still passed. This state is set by the **gwsa=off** and **gwsn=on** parameters of the **ent-1s** or **chg-1s** commands.



CAUTION: When Gateway Screening is in the screen test mode, any action in the gateway screening stop action set specified by the **actname** parameter at the end of the gateway screening process will be performed.

The **gwsa** and **gwsn** parameters are described in the [Linkset Parameters](#) section.

Linkset Parameters

Optional parameters of the enter linkset (**ent-1s**) command or the change linkset (**chg-1s**) command are used to set the screening state. These parameters are:

SCRN – the name of the gateway screening screen set that is associated with the linkset.

GWSA – Gateway screening action – The value **on** allows gateway screening to be performed on the linkset. The value **off**, does not allow gateway screening to be performed on the linkset. This parameter can only be specified if the **scrn** parameter is specified.

GWSM – Gateway screening messaging – The value **on** allows output messages to be generated. The value **off** does not allow output messages to be generated. This parameter can only be specified if the **scrn** parameter is specified.

GWSD – Gateway screening MSU discard – If gateway screening cannot be performed and the **gwsd** parameter is set to **on**, all MSUs on the linkset are discarded. These are two examples of why gateway screening could not be performed.

- No GLS cards are configured and installed in the EAGLE 5 ISS.
- The screen set is too big to be loaded onto the LIM, TSM, or the SCCP card.
The value **off** does not allow messages to be discarded. This parameter can only be specified if the **scrn** and **gwsa=on** parameters are specified.

NOTE: Discarding all MSUs on a linkset will not allow any MSUs on the linkset to be routed. It is recommended that the value specified for the **gwsd** parameter is **off**. The **gwsd** parameter should only be set to **on** if you wish screen MSUs for gateway screening rather than routing MSUs through the EAGLE 5 ISS.

Refer to the *Commands Manual* for more information on the **ent-1s** or **chg-1s** commands.

Gateway Screening Attributes

Each screen has attributes which hold information required to perform a particular screening function. The following attributes are required in order to implement all of the screening functions.

The screen set name (**scrn**) is a four character (one alpha and up to three alphanumeric) value that specifies the name of the screen set.

The screening reference (**sr**) is a four character (one alpha and up to three alphanumeric) value. Combined with the next screening function identifier (**nsfi**), it uniquely defines a screening table.

The network identifier for ANSI point codes (**ni**) is an integer between 0 and 255, the asterisk “*”, or the character “c”.

The network cluster for ANSI point codes (**nc**) is an integer between 0 and 255, the asterisk "*", or the character "c".

The network cluster member for ANSI point codes (**ncm**) is an integer between 0 and 255, the asterisk "*", or the character "c".

The zone for ITU international point codes (**zone**) is an integer between 0 and 7, the asterisk "*", or the character "c".

The area for ITU international point codes (**area**) is an integer between 0 and 255, the asterisk "*", or the character "c".

The ID for ITU international point codes (**id**) is an integer between 0 and 7, the asterisk "*", or the character "c".

The 14-bit ITU national point code (**npc**) is an integer between 1 and 16383, the asterisk "*", or the character "c". The EAGLE 5 ISS supports different formats for 14-bit ITU national point codes as defined by the **npcfmt i** parameter of the **chg-stpopts** command. No matter what format is defined by the **npcfmt i** parameter, the 14-bit ITU national point code must be entered as an integer for gateway screening. If the format of the 14-bit ITU national point code that you wish to enter for gateway screening is not a single integer, the point code value must be converted into a single integer value. For more information on converting 14-bit ITU national point code values, see the [14-Bit ITU National Point Code Formats](#) section. For more information on the different ITU national point code formats, see the 14-Bit ITU National Point Code Formats section in Chapter 2, Configuring Destination Tables in the *Database Administration Manual - SS7*.

Gateway Screening supports using ITU international spare point codes in addition to ITU international point codes, and 14-bit ITU national spare point codes in addition to 14-bit ITU national point codes. The **pcst** parameter is used to specify the whether or not the ITU international and 14-bit ITU national point codes are spare point codes (**pcst=s** parameter) or not (**pcst=none** parameter). For more information about ITU international and 14-bit ITU national spare point codes, see Chapter 2, Configuring Destination Tables in the *Database Administration Manual - SS7*. Gateway Screening does not support using private point codes.

The main signaling area value for 24-bit ITU national point codes (**msa**) is an integer between 0 and 255, the asterisk "*", or the character "c".

The sub-signaling area value for 24-bit ITU national point codes (**ssa**) is an integer between 0 and 255, the asterisk "*", or the character "c".

The signaling point value for 24-bit ITU national point codes (**sp**) is an integer between 0 and 255, the asterisk "*", or the character "c".

The ISUP message type (**isupmt**)/TUP message type (**tupmt**) is an integer between 0 and 255, or the character "*". This parameter specifies either an ISUP message type or a TUP message type for the ISUP screening reference specified in the **sr** parameter.

The service indicator (**si**) is an integer between 0 and 15. This parameter specifies a service indicator for the SIO screening reference specified in the **sr** parameter. The service indicator is the first 4 bits of an SIO.

The network indicator code (**nic**) is an integer between 0 and 3 or an "*" (asterisk). This parameter specifies a network indicator code for the SIO screening reference specified in the **sr** parameter. The network indicator code is the last 2 bits of an SIO.

The H0 heading code (**h0**) is an integer between 0 and 15, or an "*" (asterisk). This parameter specifies the first four bits of a message type for the SIO screening reference.

The H1 heading code (**h1**) is an integer between 0 and 15, or an "*" (asterisk). This parameter specifies last four bits of a message type for the SIO screening reference.

The message priority (**pri**) is an integer between 0 and 3. This parameter specifies the message priorities for the SIO screening reference.

The subsystem number (**ssn**) is an integer between 1 and 255 or an "*" (asterisk). This parameter identifies the SCP application that should receive the message.

The routing indicator (**ri**) is destination point code (DPC), global title translation (GT), or "*" (asterisk). This parameter indicates whether a subsequent global title translation is required.

- **gt** – indicates that a subsequent translation is required.
- **dpc** – indicates that no further translation is required.
- ***** (asterisk) – indicates all possible values (DPC and GT).

The translation type (**type**) is an integer between 0 and 255 or a "*" (asterisk). Identifies the type of global title translation. It is the decimal representation of the 1-byte field used in SS7.

The SCCP message type (**sccpmt**) is an integer with the values 9 (UDT messages), 10 (UDTS messages), 17 (XUDT messages), 18 (XUDTS messages), or "*" (asterisk). This parameter specifies one of these message types and is part of the calling party address screen.

The SCCP management (SCMG) format ID (**scmgfid**) is an integer from 1 to 255 or "*" (asterisk). This parameter specifies the function and format of an SCMG message and is part of the called party address screen.

The next screening function identifier (**nsfi**) is the screen function that is required to continue processing the message. It is the next step in processing the message. The values for this attribute are: **opc**, **blkopc**, **sio**, **dpc**, **blkdpc**, **destfld**, **isup cgpa**, **tt**, **cdpa**, **aftpc**, **stop**, and **fail**.

The next screening reference (**nsr**) is a four character (one alpha and up to three alphanumeric) value. Combined with the next screening function identifier (**nsfi**), it uniquely defines the next screening table to be used in the gateway screening process.

The gateway screening stop action set name (**actname**) is a six character (one alpha and up to five alphanumeric characters) value. Specified only with the **nsfi=stop** parameter, the gateway screening stop action set defines the additional actions the EAGLE 5 ISS can perform on MSUs that pass gateway screening.

The asterisk, or "*", is a single entry that indicates all possible values for that parameter.

These attributes are not used on all screens. The following list shows which attributes are required for each screening function. There are two types of attributes, search keys and results. The search keys are used to match fields in the SS7 message in order to determine the screening function result. The result is determined by matching a search key with information in the current SS7 message. The result indicates the next step in the screening process.

- Screen Set screening function
 - Search Key - SCRN
 - Result - NSFI, NSR, ACTNAME
- Allowed OPC screening function
 - Search Key - SR, NI, NC, NCM, ZONE, AREA, ID, NPC, MSA, SSA, SP, PCST
 - Result - NSFI, NSR, ACTNAME
- Blocked OPC screening function
 - Search Key - SR, NI, NC, NCM, ZONE, AREA, ID, NPC, MSA, SSA, SP, PCST

- Result - NSFI, NSR, ACTNAME
- Allowed SIO screening function
 - Search Key - SR, NIC, SI, H0, H1, PRI
 - Result - NSFI, NSR, ACTNAME
- Allowed DPC screening function
 - Search Key - SR, NI, NC, NCM, ZONE, AREA, ID, NPC, MSA, SSA, SP, PCST
 - Result - NSFI, NSR, ACTNAME
- Blocked Allowed DPC screening function
 - Search Key - SR, NI, NC, NCM, ZONE, AREA, ID, NPC, MSA, SSA, SP, PCST
 - Result - NSFI, NSR, ACTNAME
- Allowed DESTFLD screening function
 - Search Key - SR, NI, NC, NCM, ZONE, AREA, ID, NPC, MSA, SSA, SP, PCST
 - Result - NSFI, ACTNAME
- Allowed ISUP screening function
 - Search Key - SR, ISUPMT, TUPMT
 - Result - NSFI, ACTNAME

NOTE: The Allowed ISUP Screening function table contains both the ISUP message type (ISUPMT) and TUP message type (TUPMT). Only one of these parameters can be specified for an allowed ISUP screen. The parameter value to be used is dependent on the service indicator (SI) value specified in the allowed SIO screen: SI=5 for an ISUP message type, SI=4 for a TUP message type.
- Allowed CGPA screening function
 - Search Key - SR, NI, NC, NCM, ZONE, AREA, ID, NPC, MSA, SSA, SP, RI, SSN, SCCPMT, PCST
 - Result - NSFI, NSR, ACTNAME
- Allowed TT screening function
 - Search Key - SR, TYPE
 - Result - NSFI, NSR, ACTNAME
- Allowed CDPA screening function
 - Search Key - SR, NI, NC, NCM, ZONE, AREA, ID, NPC, MSA, SSA, SP, SSN, SCMGFID, PCST
 - Result - NSFI, NSR, ACTNAME
- Allowed AFTPC screening function
 - Search Key - SR, NI, NC, NCM, ZONE, AREA, ID, NPC, MSA, SSA, SP, SSN, PCST
 - Result - NSFI, ACTNAME

NOTE: The NSR attribute can only be specified when the NSFI is not STOP. The NSR cannot be specified with the ACTNAME attribute. The ACTNAME attribute can only be specified when the NSFI is STOP. The ACTNAME parameter cannot be specified with the NSR parameter. NSFI and NSR can only be defined once per screening table.

Use of the Character “ c ” for the NI, NC, NCM, ZONE, AREA, ID, NPC, MSA, SSA, and SP Parameters

The character “ c ” is used in the blocked OPC or DPC screens (for parameters **ni**, **nc**, **ncm**, **zone**, **area**, **id**, **npc**, **msa**, **ssa**, and **sp**) to allow the screening process to continue for messages with point codes that do not match any point codes in the blocked OPC or DPC screens. The character “ c ” is used this way. When screening for a blocked OPC or DPC and the point code being screened does not match any of the point codes in the blocked OPC or DPC screens, the message is not rejected and the screening process continues. To allow the screening process to continue, the blocked OPC and blocked DPC screens must have at least one entry consisting of a screening reference, a point code, a next screening function identifier, and a next screening reference. The point code is in the form of **ni=c**, **nc=c**, **ncm=c** (for ANSI point codes), **zone=c**, **area=c**, **id=c** (for ITU international point codes), **npc=c** (for 14-bit ITU national point codes), and **msa=c**, **ssa=c**, **sp=c** (for 24-bit ITU national point codes). When the character “ c ” is specified, the next screening function identifier and next screening reference must be specified, unless the next screening function identifier is stop (**nsfi=stop**). Then the next screening reference cannot be specified.

When the point code does not match any entries in the blocked OPC or DPC screens, the screening process is directed to the screening reference with the point code **c-c-c** or **npc=c**. The next screening function identifier and next screening reference in this entry are examined to determine the next step in the screening process.

When a blocked OPC or DPC screen is created, the first entry for the **ni-nc-ncm**, **zone-area-id**, or **msa-ssa-sp** must be **c-c-c**, or the **npc** must “c.” Subsequent entries can be specific point codes.

If the character “ c ” is specified for any parameters **ni**, **nc**, **ncm**, **zone**, **area**, **id**, **msa**, **ssa**, or **sp**, it must be specified for all three parameters. No other values can be used. For example, a point code **c-c-255** is not allowed. The point code must be **c-c-c**. The “*” (asterisk) value cannot be used with the character “ c ” (for example, a point code **c-c-*** is not allowed).

ANSI, ITU international, or 24-bit ITU national point codes using the value “c” can be entered by specifying only the **ni=c** parameter (for ANSI point codes), **zone=c** parameter (for ITU international point codes), or **msa=c** parameter (for 24-bit ITU national point codes), and the **nc**, **ncm**, **area**, **id**, **ssa**, and **sp** parameters can be omitted.

The **pcst** and **npcst** parameters, for specifying the ITU international and 14-bit ITU national spare point codes, cannot be used with point codes containing the character “c”.

Specifying a Range of Values for Gateway Screening Parameters

The values of these gateway screening parameters can be specified as a range of values.

- ni** – the network identifier for an ANSI point code
- nc** – the network cluster for an ANSI point code
- ncm** – the network cluster member for an ANSI point code
- pri** – the message priority in the SIO field of an MSU
- h0** – the H0 heading code in the SIF field of an MSU

h1 – the H1 heading code in the SIF field of an MSU

type – the translation type in the called party address field of an MSU

isupmt – the ISUP message type

tupmt – the TUP message type

A range of values is specified with the values that define the range separated by two ampersands (&&), for example, **:ni=025&&100** specifies all network indicators for ANSI point codes from 25 to 100.

A range of values for an ANSI point code parameter can be specified with asterisks (*) or single values for other point code parameters. [Table 2-1](#) shows the valid combinations of these parameter values.

Table 2-1. Valid Value Combinations for ANSI Point Code Parameters

NI	NC	NCM
Single Value	Single Value	Single Value
Single Value	Single Value	Range of Values
Single Value	Single Value	Asterisk
Single Value	Range of Values	Asterisk
Single Value	Asterisk	Asterisk
Range of Values	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

A range of values for the H0 and H1 heading codes can be specified with asterisks (*) or single values for other heading code parameter. [Table 2-2](#) shows the valid combinations of these parameter values.

Table 2-2. Valid Value Combinations for H0 and H1 Parameters

H0	H1
Single Value	Single Value
Single Value	Range of Values
Single Value	Asterisk
Range of Values	Asterisk
Asterisk	Asterisk

When changing or removing an existing gateway screening entry, the ANSI point code values, priority values, H0 and H1 heading code values, translation type, ISUP message type, or TUP message type values specified with the command must match the values configured in the database for the specified screening reference. If a command is specified with a parameter value that is part of a range of values for that parameter already configured for that screening reference, the command is rejected.

For example, the database contains a gateway screening entry for the range of allowed OPCs 010-010-010 to 010-010-100 in Allowed OPC screening reference **opc1**. If an attempt is made to remove or change Allowed OPC screening reference **opc1** and the ANSI point code 010-010-025 is specified. The command is rejected because point code 010-010-025 is a part of the point code range configured in the database. To remove or change Allowed OPC screening reference **opc1**, these point code parameters must be specified with the command, **ni=010, nc=010, ncm=010&&100**.

If the ANSI point code, priority value, H0 and H1 heading code values, or translation type values specified with an enter command is within the range of values already configured for the specified screening reference, the command is rejected. For example, the **ent-scr-opc** command is entered with the point code 010-010-050 assigned to screening reference **opc1**. If the database contains the range of point codes 010-010-010 to 010-010-100, specified as **ni=010,nc=010,ncm=010&&100**, the command is rejected. If the database contains an entry for all point codes with the network identifier of 010 and network cluster of 010, **ni=010,nc=010,ncm=***, the command is rejected.

A range of values can be specified when displaying gateway screening entries. The range of values does not have to match the values configured in the database. The range of values specified with a retrieve command is used to limit the number of entries to search for. There are some restrictions for using ANSI point code values with retrieve commands. [Table 2-3](#) shows the valid combinations of the ANSI point code parameters.

Table 2-3. Valid Parameter Combinations for ANSI Point Code Parameters

NI	NC	NCM
Single value	Single value	Single value, a range of values, an asterisk, or the NCM value not specified
Single value	A range of values, an asterisk, or the NC value is not specified	the NCM value is not specified
A range of NI values, an asterisk, or the NI value is not specified	the NC value is not specified	the NCM value is not specified

The range of values are displayed in the output of the retrieve commands the same way as they were entered. The following are examples of outputs containing ranges of values.

rtrv-scr-blkdpc:sr=iec:ni=240:nc=001:ncm=010&&018

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = BLOCKED DPC
SR  NI  NC  NCM  NSF1  NSR/ACT
IEC 240 001 010&&020 STOP  -----
```

rtrv-scr-sio:sr=iec:nic=1:si=1

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED SIO
SR  NIC  PRI  SI  H0  H1  NSF1  NSR/ACT
IEC 2 0&&2 1 08&&11 * BLKDPC WDB2
IEC 2 1 1 11 03&&07 DPC ABC2
```

rtrv-scr-tt:all=yes

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED TT
SR  TYPE  NSF1  NSR/ACT
IEC 005&&010 STOP  -----
IEC 012 STOP  -----
IEC 016 CDPA IEC
WRD2 243 STOP  -----
WRD4 * STOP  -----
```

Use of the Asterisk “ * ” for the ZONE, AREA, ID, MSA, SSA, and SP Parameters

A range of values for an ITU-I or 24-bit ITU-N point code parameter can be specified using a combination of asterisks (*) and single values for the point code parameters. [Table 2-4](#) shows the valid combinations of the ITU-I parameter values. [Table 2-5](#) shows the valid combinations of the 24-bit ITU-N parameter values.

Table 2-4. Valid Value Combinations for ITU-I Point Code Parameters

ZONE	AREA	ID
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Table 2-5. Valid Value Combinations for 24-Bit ITU-N Point Code Parameters

MSA	SSA	SP
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

[Table 2-6](#) shows the valid combinations of the ITU-I point code parameters used with the retrieve commands when displaying ITU-I gateway screening entries.

Table 2-6. Valid Parameter Combinations for ITU-I Point Code Parameters

ZONE	AREA	ID
Single value	Single value	Single value, an asterisk, or the ID value not specified
Single value	An asterisk, or the AREA value is not specified	the ID value is not specified
An asterisk, or the ZONE value is not specified	the AREA value is not specified	the ID value is not specified

[Table 2-7](#) shows the valid combinations of the 24-bit ITU-N point code parameters used with the retrieve commands when displaying 24-bit ITU-N gateway screening entries.

Table 2-7. Valid Parameter Combinations for 24-bit ITU-N Point Code Parameters

MSA	SSA	SP
Single value	Single value	Single value, an asterisk, or the SP value not specified
Single value	An asterisk, or the SSA value is not specified	the SP value is not specified

MSA	SSA	SP
An asterisk, or the MSA value is not specified	the SSA value is not specified	the SP value is not specified

User Interface Requirements

A screening table is created, modified, displayed and removed using these on-line commands. For more information on these commands, go to the *Commands Manual*.

- Screen Set – **ent-scrset, chg-scrset, dlt-scrset, rtrv-scrset**
- Allowed Originating Point Code – **ent-scr-opc, chg-scr-opc, dlt-scr-opc, rtrv-scr-opc**
- Blocked Originating Point Code – **ent-scr-blkopc, chg-scr-blkopc, dlt-scr-blkopc, rtrv-scr-blkopc**
- Allowed Service Information Octet – **ent-scr-sio, chg-scr-sio, dlt-scr-sio, rtrv-scr-sio**
- Allowed Destination Point Code – **ent-scr-dpc, chg-scr-dpc, dlt-scr-dpc, rtrv-scr-dpc**
- Blocked Destination Point Code – **ent-scr-blkdpc, chg-scr-blkdpc, dlt-scr-blkdpc, rtrv-scr-blkdpc**
- Allowed Affected Destination Field – **ent-scr-destfld, chg-scr-destfld, dlt-scr-destfld, rtrv-scr-destfld**
- Allowed ISUP/TUP Message Type – **ent-scr-isup, chg-scr-isup, dlt-scr-isup, rtrv-scr-isup**
- Allowed Calling Party Address – **ent-scr-cgpa, chg-scr-cgpa, dlt-scr-cgpa, rtrv-scr-cgpa**
- Allowed Called Party Address – **ent-scr-cdpa, chg-scr-cdpa, dlt-scr-cdpa, rtrv-scr-cdpa**
- Allowed Translation Type – **ent-scr-tt, chg-scr-tt, dlt-scr-tt, rtrv-scr-tt**
- Allowed Affected Point Code – **ent-scr-aftpc, chg-scr-aftpc, dlt-scr-aftpc, rtrv-scr-aftpc**
- Gateway Screening Stop Action Sets – **chg-gws-actset, rtrv-gws-actset**

Command Summary

This section briefly describes each type of command used in this chapter. There are four commands for each screening function. One to enter the screening information (**ent**), one to change the screening information after it has been entered (**chg**), one to delete screening information (**dlt**), and one to display the screening information (**rtrv**).

If the command is not accepted, a “Command Rejected” message is displayed. If the command is accepted, a time stamp and a “Command Completed” message is displayed. For example:

```
E2361 Cmd Rej: Screen set name not defined
```

or

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
ENT-SCR-OPC: MASP A - COMPLTD
```

Any time a screen set is affected by a command (for example, an entry is added to, removed from, or changed in the screen set) a “Screen Set Affected” message is displayed indicating the percentage of memory that screen set occupies (100% = the maximum space available). This information is useful in determining how “full” the screen set is at any given time. The percentages are calculated after the command is executed. For example, the output message, ENT-SCR-OPC: SCREEN SET AFFECTED - SS01 25% FULL, indicates that after an entry was added to screen set SS01 by the **ent-scr-opc** command, it occupied 25% of the maximum space available. The following is an example of the output that can be received when a screen set is affected.

```
Extended Processing Time Required -- Please Wait
Notice: The number of screensets affected is 2.
ENT-SCR-OPC: SCREEN SET AFFECTED - ss01 25% FULL
ENT-SCR-OPC: SCREEN SET AFFECTED - ss04 35% FULL
ENT-SCR-OPC: MASP A - COMPLTD
```

When a new screen set is created it immediately occupies space which may or may not be over the allowed limit. The user must know how much space has been occupied by the new screen set. For example, if the screen set **SCR1** is created, the output of the **ent-scrset** command has the following format:

```
Extended Processing Time Required -- Please Wait
Notice: The number of screensets affected is 1.
ENT-SCRSET: SCREEN SET AFFECTED - scr1 95% FULL
ENT-SCRSET: MASP A - COMPLTD
```

NOTE: A screen set can be over 100% full, but it is not recommended that the screen set remain in this condition. The gateway screening process will not function properly using a screen set that is over 100% full. Some entries must be removed from the screen set to reduce the screen set capacity to 100% or below.

Enter Commands

All of the parameters in the enter command are mandatory. If the enter command contains a screening reference that does not exist, a new screening table is created. If the screening reference exists, and an entry that matches the specified parameters does not already exist, a new entry is added to the screening table. If an entry exists already, the command is rejected.

Change Commands

At least one parameter must be changed in the change commands. Parameters that are considered part of the search key must be specified in every **chg** command (for example, the **ni**, **nc**, **ncm**, **zone**, **area**, **id**, **npc**, **msa**, **ssa**, and **sp** parameters for the **chg-scr-opc** command). Each of these parameters has a corresponding “new” parameter (for example, **nni**, **nnc**, **nncm**, **nzone**, **narea**, **nid**, **nnpc**, **nmsa**, **nssa**, **nsp**) which may be specified in order to change the entry in the screening table. Parameters that are not part of the search key may be specified, but do not have “new” values. For example, the **nsfi**, **nsr**, **ri**, and **actname** parameters do not have “new” parameters (for example, **nnsfi**, **nnsr**, **nri**, or **nactname**). If a “new” parameter is not specified, it assumes the value of the corresponding search key parameter. For example, if the **nni** parameter is not specified, then the **ni** parameter does not change since the **nni** parameter assumes the value of the **ni** parameter. If, however, a “new” parameter is specified, it must follow the same rules as the search keys. For example, if the **nni** and **nncm** parameters are not specified, and the **nnc** parameter is specified as an “*” (asterisk), then the **ncm** parameter must be an “*” (asterisk). The new data must not already exist in the screening table. If an entry already exists which matches the new data, the command is rejected.

Delete Commands

The use of the asterisk value in a delete command implies the deletion of a specific entry containing that asterisk value, not the deletion of multiple entries whose values may be in the range implied by the asterisk. For example, entering `dlt-scr-opc:sr=opc1:ni=*:nc=*:ncm=*` cannot be used to remove all entries in `opc1`.

When the last entry is deleted from a screening table, the entire table is deleted, unless it is referenced by another screening table. If a screening table is referenced and an attempt is made to delete the last entry in the screening table, an error message is displayed.

Retrieve Commands

The retrieve commands for each screening function have the same parameters as the enter commands with an additional parameter called `all`. The `all` parameter defaults to `no`, and can only be specified if no other parameters are specified. If the `all` parameter is specified and is `yes`, then a detailed output consisting of every entry in each rule of the indicated screening function type is displayed. There are no rules associated with parameter combinations (for example, if the `nc` parameter is equal to `*` then the `ncm` parameter must be `"*"`). If an entry is specified using a `"*"`, then only the entries where that parameter is a `"*"` is output.

If the NSFI has a value other than `STOP` or `FAIL`, then the name of the screening reference to be used in the next step of the gateway screening process (NSR) must be specified. The value of the NSR is shown in the **NSR/ACT** field.

If the NSFI is `STOP`, no NSR value can be specified. The gateway screening stop action sets can be specified with the `actname` parameter if the NSFI is `STOP`. If a gateway screening stop set has been assigned to the screen, the **NSR/ACT** field shows the name of the gateway screening stop action set. for more information on the gateway screening stop action sets, go to the [Configuring Gateway Screening Stop Action Sets](#) procedure.

If the NSFI is `FAIL` or `STOP` and no NSR or ACTNAME value is assigned to the screen, the entry `-----` is shown in the **NSR/ACT** field.

The following is an example of a detailed output using the `rtrv-scr-opc` command with the `all=yes` parameter specified.

```
r1ghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED OPC
SR  NI      NC      NCM      NSFI      NSR/ACT
IEC 240      001      010&&200 STOP      -----
IEC 241      *        *        CGPA      cg04
SR   ZONE    AREA    ID      NSFI      NSR/ACT
IEC 1        003     4       BLKOPC    blk1
IEC 1        003     5       STOP      COPY
SR   NPC
IEC 00235
IEC 00240
CGPA      cg04
CGPA      cg01
SR  NI      NC      NCM      NSFI      NSR/ACT
WRD2 243      015&&075 *        STOP      RDCT
WRD3 243      105     002     CGPA      WRD4
SR   NPC
WRD4 00245
WRD4 00247
NSFI      NSR/ACT
BLKOPC    blk3
STOP      CR
```

For the `rtrv-scrset:all=yes` command, the output consists of every screen set and every screening table in each screen set, in addition to the fields displayed from the `rtrv-scrset` command with no parameters. The following is an example of the detailed output of the `rtrv-scrset:all=yes` command.

```
r1ghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0

SCRN NSFI  NSR/ACT  RULES  DESTFLD
SS01 OPC    IEC      120    Y
```

	DPC	GOOP	33	
	SIO	WRD1	5	
SS02	STOP	-----	0	Y
SS03	DPC	WRD1	56	Y
	SIO	WRD2	10	
	BLKDPC	WRD5	30	

Parameters that are not specified default to “all possible values” for that parameter. If no parameters are specified (except for the **rtrv-scrset** command), a summary output is displayed. A summary output consists of three columns of information, the screening references for the specified screen (**SR**), and an indicator of whether the screen table is referenced or not (**REF**), and the number of entries in the screening reference (**RULES**). The following is an example of a summary output using the **rtrv-scr-opc** command with no parameters.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED OPC
```

SR	REF	RULES
IEC	YES	2
WRD2	YES	1
WRD3	NO	4
WRD4	YES	9

For the **rtrv-scrset** command, if no parameters are specified, the output displays the following information.

- The capacity of the gateway screening database, as a percentage of the maximum capacity
- The percentage of the maximum number of the CDPA and AFTPC tables
- The total number of screen sets in the database with the percentage of the screen set capacity
- The number of SEAS and EAGLE 5 ISS screen sets being used
- The screen set name (**SCRN**)
- The next screening function that should be used in the gateway screening process (**NSFI**)
- The next screening reference or the gateway screening stop action set name (**NSR/ACT**)
- The memory capacity (percentage) of each screen set (**FULL**)
- The number of entries (rules) in the screen set (**RULES**)
- The number of tables in the screen set (**TABLES**)
- Whether the automatic allowed affected destination screening (**DESTFLD**) for network management messages is applied against the routing table, self point codes, and capability point codes. When this parameter is on, the automatic screening is applied at the end of the provisioned screen set.

The following is an example of the output of the **rtrv-scrset** command with no parameters.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
ENTIRE GWS DATABASE IS 1% FULL
CDPA + AFTPC TABLES ARE 1% FULL
SCREEN SET TABLE IS ( 7 OF 255 ) 2% FULL
THERE ARE 0 SEAS SCREEN SETS USED ( prefix 00nn )
THERE ARE 7 EAGLE SCREEN SETS USED
```

SCRN	NSFI	NSR/ACT	FULL	RULES	TABLES	DESTFLD
ss01	OPC	opc1	51%	2075	22	Y
ss02	OPC	opc2	2%	75	22	Y
ss03	OPC	opc3	2%	75	22	Y
ss04	OPC	opc1	51%	2075	22	N
ss07	OPC	opc1	51%	2075	22	Y
ss09	OPC	opc1	51%	2075	22	N
ss28	OPC	opc1	51%	2075	22	Y

The outputs of the retrieve commands contains the following fields. There are certain fields that are used with specific commands and these are noted in the description of the field.

AREA – The area value of an ITU international point code, expressed as **zone-area-id**. This field is used with all screening functions except screen set, allowed SIO, and allowed TT screening functions.

DESTFLD – Whether the automatic allowed affected destination screening for network management messages is applied against the routing table, self point codes, and capability point codes. When this parameter is on, the automatic screening is applied at the end of the provisioned screen set. This field is only used with the screen set function.

FULL – The capacity of allowed memory a given screen set occupies, expressed as percentage. This field is only used with the screen set function.

H0 – The H0 heading code in the service information field. The **H0** field shows the first four bits of the message type indicator in the SIO field. This field is only used with the allowed SIO screening function.

H1 – The H1 heading code in the service information field. The **H1** field shows the last four bits of the message type indicator in the SIO field. This field is only used with the allowed SIO screening function.

ID – The ID value of an ITU international point code, expressed as **zone-area-id**. This field is used with all screening functions except screen set, allowed SIO, and allowed TT screening functions.

ISUPMT/TUPMT – The ISUP message type (**ISUPMT**) in the service information field of an ISUP message or the TUP message type (**TUPMT**) in the service information field of a TUP message. This field is used only with allowed ISUP screening functions.

MSA – The main signaling area value of a 24-bit ITU national point code, expressed as **msa-ssa-sp**. This field is used with all screening functions except screen set, allowed SIO, and allowed TT screening functions.

NC – The network cluster of an ANSI point code, expressed as **ni-nc-ncm**. This field is used with all screening functions except screen set, allowed SIO, and allowed TT screening functions.

NCM – The network cluster member of an ANSI point code, expressed as **ni-nc-ncm**. This field is used with all screening functions except screen set, allowed SIO, and allowed TT screening functions.

NI – The network identifier of an ANSI point code, expressed as **ni-nc-ncm**. This field is used with all screening functions except screen set, allowed SIO, and allowed TT screening functions.

NIC – The network indicator code in the service information octet. This field is only used with the allowed SIO screening function.

NPC – The ITU national point code. This field is used with all screening functions except screen set, allowed SIO, and allowed TT screening functions.

NSFI – The next screening function identifier. The next screening function identifier specifies the next screening function that should be used in the gateway screening process. This field is used with all screening functions.

NSR/ACT – The next screening reference or the gateway screening stop action set name. The next screening reference is the name of the of the next gateway screening entity that should be used in the screening process. The gateway screening stop action set name is the name of the gateway screening stop action set assigned to the screen defining the additional action to be performed on the MSU that passes gateway screening. This field is used with all screening functions.

PRI – The priority of a message in the service information octet. This field is only used with the allowed SIO screening function.

REF – An indicator of whether the specified screening table is referenced by another screening table. This field is used with the summary outputs of all retrieve commands except the retrieve screen set (**rtrv-scrset**) command.

RI – The routing indicator in the called party address (CDPA). This field is only used with the allowed CGPA screening function.

RULES – The number of entries in the screen. This field is only used with the screen set function.

SCCPMT – The SCCP message type. This field is only used with the allowed calling party address function.

SCMGFID – The SCCP management (SCMG) format ID, which defines the function and format of each SCMG message. This field is only used with the allowed called party address function.

SCRN – The name of the screen set. This field is only used with the screen set function.

SI – The service indicator for the service information octet, which are the last two bits of the subservice field. This field is only used with the allowed SIO screening function.

SP – The signaling point value of a 24-bit ITU national point code, expressed as **msa-ssa-sp**. This field is used with all screening functions except screen set, allowed SIO, and allowed TT screening functions.

SR – The name of the screening reference. This field is used with all screening functions except the screen set screening function.

SSA – The sub-signaling area value of a 24-bit ITU national point code, expressed as **msa-ssa-sp**. This field is used with all screening functions except screen set, allowed SIO, and allowed TT screening functions.

SSN – The subsystem number of a given point code. This field is only used with the allowed CGPA, allowed CDPA, and allowed AFTPC screening functions.

TABLES – The number of tables in the screen. This field is only used with the screen set function.

TYPE – The translation type that is allowed for global title translation. This field is only used with the allowed TT screening function.

ZONE – The zone value of an ITU international point code, expressed as **zone-area-id**. This field is used with all screening functions except screen set, allowed SIO, and allowed TT screening functions.

The ITU international and 14-bit ITU national spare point codes are displayed in the output of the Gateway Screening retrieve commands with the spare point code subtype prefix “s-”.

14-Bit ITU National Point Code Formats

Gateway screening only allows 14-bit ITU national point codes to be provisioned in the database by the enter, delete, or change gateway screening commands, and displayed by the gateway screening retrieve commands as a single number. If a format other than a single number (14-0-0) for the 14-bit ITU national point code has been defined by the **npcfmt.i** parameter of the **chg-stpopts** command, the 14-bit ITU national point code must be converted into a single number so that it can be used by gateway screening.

For example, the format of the 14-bit ITU national point code is 4-4-4-2 and the user would like to add point code value 7-7-7-1 into the allowed OPC screen. The point code value 7-7-7-1 would have to be converted to a single number so that the point code can be added to the allowed OPC screen. To determine what multiple part 14-bit ITU national point code is represented by the single number 14-bit ITU national point code in the gateway screening table, the single number point code must be converted to a multiple part point code.

To convert a single number 14-bit ITU national point code to a multiple part point code, perform the [Converting Single Number 14-Bit ITU National Point Codes](#) procedure.

To convert a multiple part 14-bit ITU national point code to a single number point code, perform the [Converting Multiple Part 14-Bit ITU National Point Codes](#) procedure.

For a definition of the different formats that can be used for 14-bit ITU national point codes, see the 14-Bit ITU National Point Code Formats section in Chapter 2, Configuring Destination Tables in the *Database Administration Manual - SS7*.

Converting Single Number 14-Bit ITU National Point Codes

To convert a single number 14-bit ITU national point code to a multiple part 14-bit ITU national point code, perform these steps. To make this conversion, you will need to know the format of the 14-bit ITU national point code. This can be verified in the **NPCFMTI** field of the **rtrv-stpopts** command output. For this example, the 14-bit ITU national point codes 14781 and 695 are converted to point codes using the 3-8-3-0 format.

Procedure

1. The point code is converted to a binary number.

This can be done with most scientific calculators.

- a. The number 14781 converts to the binary number 11100110111101.
- b. The number 695 converts to the binary number 1010110111.

NOTE: Make sure the binary number contains 14 digits. If it does not, add leading zeros to the binary number to bring the total number of digits in the number to 14.

In this example, the binary equivalent for the decimal number 695 (1010110111) contains 10 digits, so four zeros must be added to the beginning of the binary number. The resulting binary number is now 00001010110111.

2. Divide the binary number into the number of parts required by the format of the 14-bit ITU national point code.

For this example, the format is 3-8-3-0. Since the last part of the point code format is 0, the point code format contains only three parts. Divide the point code into three parts, the first part of the point code contains the first three digits of the 14-digit binary number, the second part of the point code contains the next eight digits of the 14-digit binary number, and the third part of the point code contains the last three digits of the 14-digit binary number.

For this example, the binary numbers would be divided like this:

- a. 11100110111101 = 111 00110111 101
- b. 00001010110111 = 000 01010110 111

3. Convert each part of the point code into a decimal number using the same scientific calculator used in step 1 and separate each part of the point code with dashes.

The results are as follows.

- a. 111 00110111 101 = 7-55-5
- b. 000 01010110 111 = 0-86-7

When the 14-bit ITU national point codes are converted from single numbers to multiple part point codes, the resulting value of the multiple part point code depends on the point code format specified by the **npcfmt.i** parameter of the **chg-stpopts** command. When converting the single number

point code 14781 to the point code format 3-8-3-0, the resulting point code value is 7-55-5. If point code 14781 is converted to the point code format 4-4-4-2, the resulting point code value is 14-6-15-1.

Converting Multiple Part 14-Bit ITU National Point Codes

To convert multiple part 14-bit ITU national point codes to a single number, perform these steps. To make this conversion, you will need to know the format of the 14-bit ITU national point code. This can be verified in the **NPCFMTI** field of the **rtrv-stpopts** command output. For this example, the 14-bit ITU national point codes 7-55-5 and 0-86-7, using the 3-8-3-0 point code format, are converted into a single number.

Procedure

1. Convert each part of the point code into a binary number using a scientific calculator.

The results are as follows.

a. 7-55-5 = 111 00110111 101

b. 0-86-7 = 000 01010110 111

2. Combine each part of the point code into a single binary number as follows.

a. 111 00110111 101 = 11100110111101

b. 000 01010110 111 = 00001010110111

NOTE: If the binary number has any zeros at the beginning of the number, remove these zeros as they are not necessary.

In this example, the binary equivalent for the point code 0-86-7 (00001010110111) contains four zeros at the beginning of the binary number. When the leading zeros are removed from the binary number, the resulting binary number is now 1010110111.

3. Convert the binary number to a decimal number using the same scientific calculator used in step 1.

a. The binary number 11100110111101 converts to the decimal number 14781.


b. The binary number 1010110111 converts to the decimal number 695.

Gateway Screening Using Duplicate ITU National Point Codes

NOTE: The Duplicate ITU National Point Code feature applies only to 14-bit ITU national point codes.

Gateway screening does not support the Duplicate ITU National Point Code Support feature. The point code value specified with the **npc** parameter can only be a 5-digit number and cannot contain any group code values. However, by assigning a different screenset to the linksets that have different group codes, you can screen on ITU national point codes that have group codes assigned to them. The screenset is assigned to the linkset with the **scrn** parameter of either the **ent-ls** or **chg-ls** command.

For example, in the network in [Figure 2-1](#), if you want to screen out MSUs coming from OPC 6217 in group GE, but allow MSUs coming from OPC 6217 in group FR, you could assign different screensets to linksets LSB1 and LSB2. The screenset assigned to linkset LSB1 would allow MSUs from OPC 6217. The screenset assigned to linkset LSB2 would block MSUs from OPC 6217.

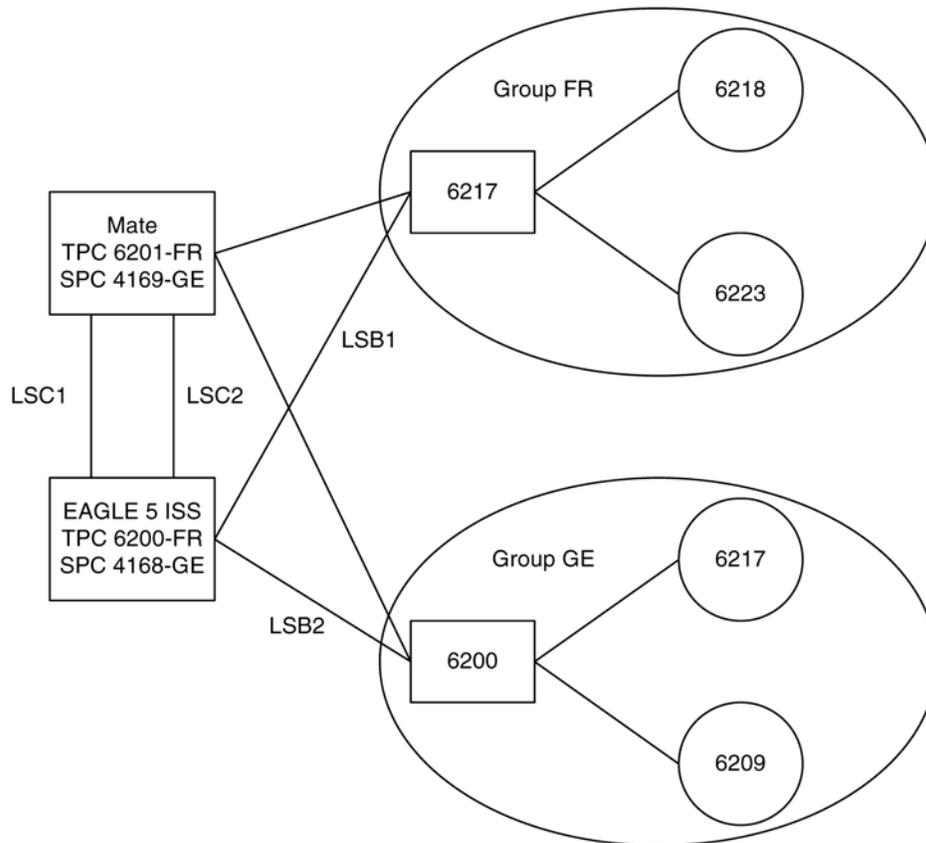Figure 2-1. Sample Network Showing Gateway Screening Using Duplicate ITU National Point Codes

Gateway Screening Configuration

Gateway screening can be configured in a variety of ways, depending on the criteria you wish to screen the messages for. The examples used in these procedures are based on seven example configurations ([Figure 2-3](#) through [Figure 2-9](#)). Each example configuration shows the screening order used by the EAGLE 5 ISS, with the screening criteria for each screen, and the order that these screens are added to the database to achieve the screening order, with the command entry required to enter the screening criteria into the database.

Each procedure adding a gateway screening entity to the database contains a table showing the parameters and the data used for the command examples.

NOTE: The gateway screening rules table can contain a maximum of 362,700 rules.

The EAGLE 5 ISS can contain a maximum of 255 screen sets.

Each screen set can contain a maximum of 4,000 rules, however the total number of rules contained in all the screen sets cannot exceed 362,700.

These general rules apply to configuring gateway screening entities in the database. Each procedure contains any rules that are specific to that procedure.

1. The gateway screening feature must be turned on before gateway screening entities can be added to the database.

Verify this by entering the **rtrv-feat** command. If the gateway screening feature is off, it can be turned on by entering the **chg-feat:gws=on** command.

NOTE: Once the gateway screening feature is turned on with the chg-feat command, it cannot be turned off

2. A TSM running the GLS GPL must be configured in the database with the **ent-card:type=tsm:appl=gl:loc=<TSM Card Location>** command.

Verify this with the **rtrv-card** command.

3. Changing or removing an existing gateway screening entity will change the screening order for the messages on the linkset.

Verify the new screening order before changing or removing any gateway screening entities.

4. If the screen set being added to the database, includes existing screening references, messages in the linkset being screened will be screened against all entries in those screening references.

This could allow a message into the EAGLE 5 ISS that was not supposed to be allowed in, or a message blocked from the EAGLE 5 ISS that is supposed to be allowed in. Verify the contents of existing screening references to make sure that you want all messages in the linkset screened against all entries in the existing screening references.

5. The gateway screening entity specified by the **nsfi** and **nsr** parameters must be in the database.
6. If the **nsfi** and **nsr** parameters do not reference an existing screening entity, the **nsfi** parameter must be set to **stop** and the **nsr** parameter cannot be specified.

When the **nsfi** parameter is set to **stop**, the gateway screening process stops at the specified screen.

7. The **actname** parameter, specifying the gateway screening stop action set assigned to the screen, can only be specified with the **nsfi=stop** parameter.



CAUTION: When Gateway Screening is in the screen test mode, as defined by the linkset parameters gwsa=off and gwsm=on, any action in the gateway screening stop action set specified by the actname parameter at the end of the gateway screening process will be performed.

8. The word **SEAS** cannot be used as a value for the **scrn** parameter of the **ent-scrset**, **dlt-scrset**, and **chg-scrset** commands.

The word **SEAS** is used in the **rtrv-ls** command output, in the **SCRN** field, to show gateway linksets created on the SEAS interface. A gateway linkset can only be configured from a SEAS terminal and not from an EAGLE 5 ISS terminal. Gateway linksets can only be displayed from the SEAS interface.

9. When removing gateway screening entities from the database, the specified entity cannot be removed if it is referenced by other gateway screening entities.

If it is referenced by other gateway screening entities, either the **nsfi** parameter in those gateway screening entities must be changed to **stop**, or the **nsfi** and **nsr** parameters in the those gateway screening entities must be changed to reference other gateway screening entities.

10. Point code values containing all zeros, shown in the following list, cannot be specified for any gateway screening command:

- ANSI Point Code - 000-000-000
- ITU-I Point Code - 0-000-0

11. For example, the 14-bit ITU national point code 1 (**npc=1**) and the 24-bit ITU national point code 000-000-001 (**msa=0**, **ssa=0**, **sp=1**) cannot be specified for the same screening reference as both of these

point codes have the same internal value. This would also apply to using the asterisk as a point code value. The **npc=*** and the **msa=***, **ssa=***, **sp=*** parameters cannot be specified in the same screening reference.

- If the last entry in the specified screening reference is removed from the database, the screening reference is removed from the database.

If an attempt is made to display that specified screening reference name (for example, entering the **rtrv-scr-opc:sr=iec** command after removing the last entry in the allowed OPC screen IEC), the following error message is displayed showing that the specified screening reference name could not be found in the database.

```
E2573 Cmd Rej: SR or NSR does not reference an existing SR
```

- The EAGLE 5 ISS screens messages in a hierarchical fashion.

For example, allowed OPC screens are checked before blocked OPC screens; blocked OPC screens are checked before allowed SIO screens, and so on. The gateway screening entities must be entered in reverse of the order that the screening process takes place (see [Figure 2-2](#)). To add gateway screening entities into the database, the first entity to be entered must be the entity that you want to stop screening the message on. The other entities follow in the proper order and the screen set is the last entity to be added into the database. The screen set entity must be in the database for gateway screening to take place. [Table 2-8](#) The following lists shows the order of the MTP gateway screening process and the SCCP gateway screening process and the order that these gateway screening entities must be entered into the database.


Table 2-8. Gateway Screening Process and Provisioning Order

MTP Gateway Screening Order		SCCP Gateway Screening Order	
Screening Order	Order of Entry into the Database	Screening Order	Order of Entry into the Database
1. Screen Set	1. Allowed DESTFLD	1. Screen Set	1. Allowed AFTPC
2. Allowed OPC	or Allowed ISUP*	2. Allowed OPC	2. Allowed CDPA
3. Blocked OPC	2. Blocked DPC	3. Blocked OPC	3. Allowed TT
4. Allowed SIO	3. Allowed DPC	4. Allowed SIO	4. Allowed CGPA
5. Allowed DPC	4. Allowed SIO	5. Allowed DPC	5. Blocked DPC
6. Blocked DPC	5. Blocked OPC	6. Blocked DPC	6. Allowed DPC
7. Allowed DESTFLD	6. Allowed OPC	7. Allowed CGPA	7. Allowed SIO
or Allowed ISUP*	7. Screen Set	8. Allowed TT	8. Blocked OPC
		9. Allowed CDPA	9. Allowed OPC
		10. Allowed AFTPC	10. Screen Set

* The allowed ISUP screen can contain ISUP and TUP message types.

Using the **ent-ls** or **chg-ls** commands, the screen set can then be assigned to a linkset and all messages on that linkset are screened for acceptance into the network.

Figure 2-2. The Gateway Screening Process

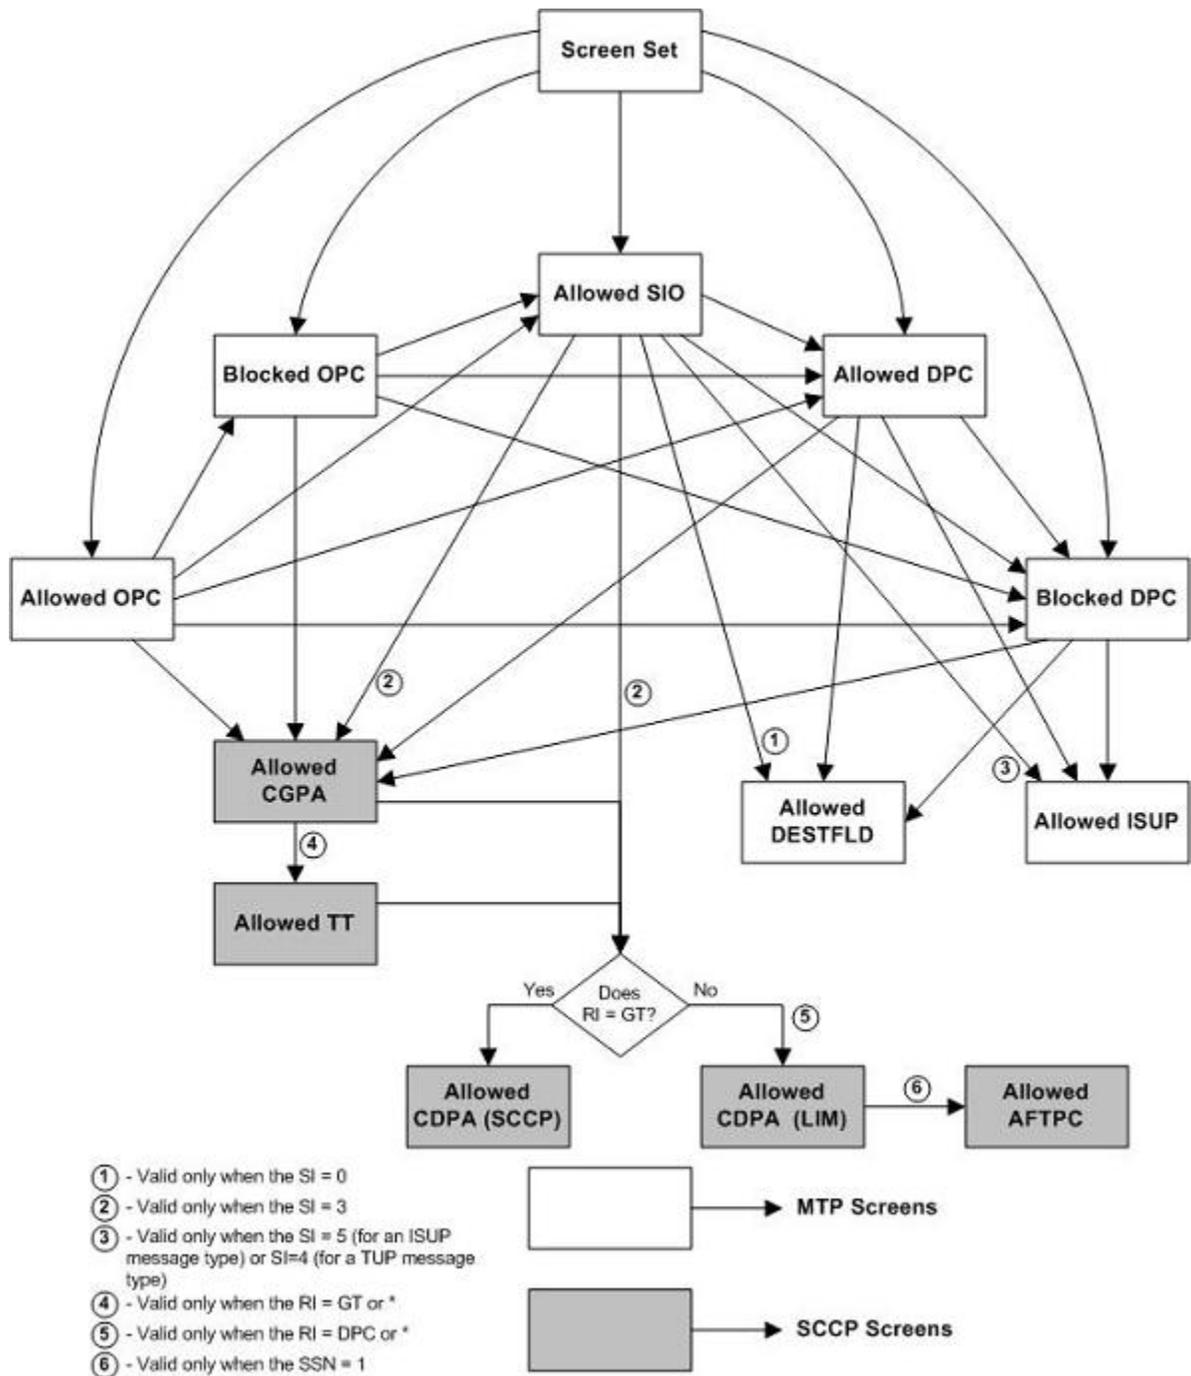

Gateway Screening Configuration Examples

Example 1

Example 1 screens the messages in a linkset for the following criteria. [Figure 2-3](#) shows the screening order the EAGLE 5 ISS uses and the order that the screens must be entered into the database.

- Allow into the EAGLE 5 ISS messages containing the following items
The OPC 001-001-001

The DPC 003-003-003


The calling party address (CGPA) 006-006-006, with the subsystem number of 253 and the routing indicator (**ri**) of **dpc** and the SCCP message type of UDT

The called party address (CDPA) 003-003-003 with the subsystem number of 001, and the SCMG format ID of 050

The allowed affected point code (AFTPC) of 008-008-008 with the subsystem number of 250
- Block from the EAGLE 5 ISS messages containing these items
The OPC 001-002-002

The DPC 004-004-004
- The message that passes the gateway screening criteria is copied for the STPLAN application (specified with the **actname** parameter and the name of the gateway screening stop action set containing the **COPY** gateway screening stop action).

Figure 2-3. Gateway Screening Configuration - Example 1

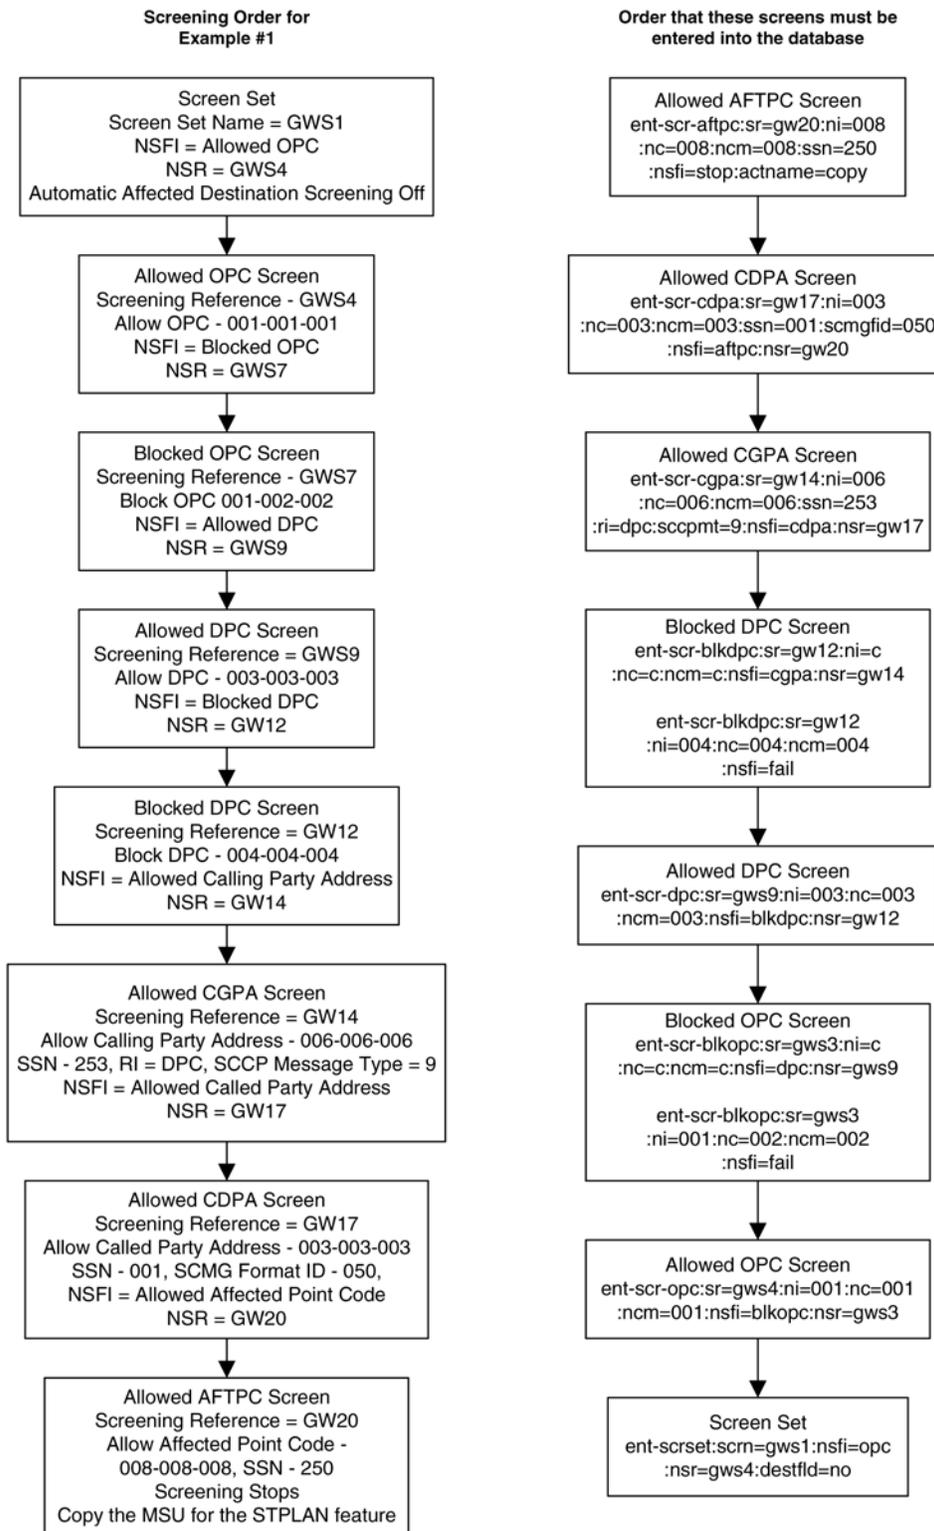

Example 2

Example 2 screens the messages in a linkset for the following criteria. [Figure 2-4](#) shows the screening order the EAGLE 5 ISS uses and the order that the screens must be entered into the database.

- Allow messages containing the following items into the EAGLE 5 ISS

The following SIO information:


- The network indicator code of 2 (**nic=2**)
- The service indicator of 3 (**si=3**)
- Message priorities ranging from 1 to 3 (**:pri=1&&3**)

The calling party address (CGPA) 7-100-4, with the subsystem number of 254 and the routing indicator (**ri**) of *, and the SCCP message type of UDTS

The called party address (CDPA) 5-117-2 with the subsystem number of 254

- Block messages containing the OPC 4-250-3 from the EAGLE 5 ISS

Figure 2-4. Gateway Screening Configuration - Example 2

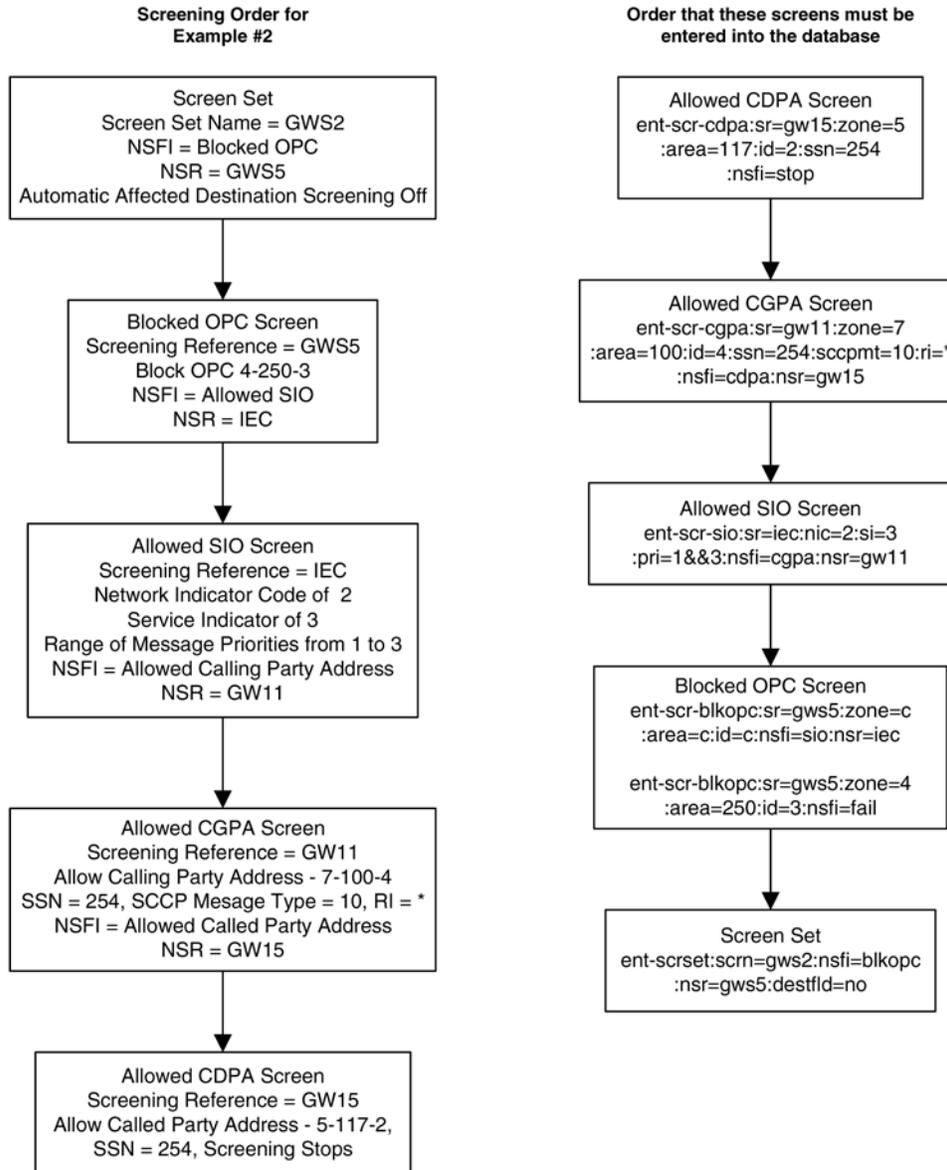

Example 3


Example 3 screens the messages in a linkset for the following criteria. [Figure 2-5](#) shows the screening order the EAGLE 5 ISS uses and the order that the screens must be entered into the database.

- Allow into the EAGLE 5 ISS messages containing the following items
 - The DPCs from 070-070-025 to 070-070-135
 - The calling party address (CGPA) 007-007-007, with the subsystem number of 250 and the routing indicator (ri) of gt and the SCCP Message type of XUDT
 - The translation type (TT) 250

The called party address (CDPA) 006-006-006 with the subsystem number of 253

- Block messages containing the DPC 005-005-005 from the EAGLE 5 ISS
- Automatic Destination Field screening is on.


Figure 2-5. Gateway Screening Configuration - Example 3

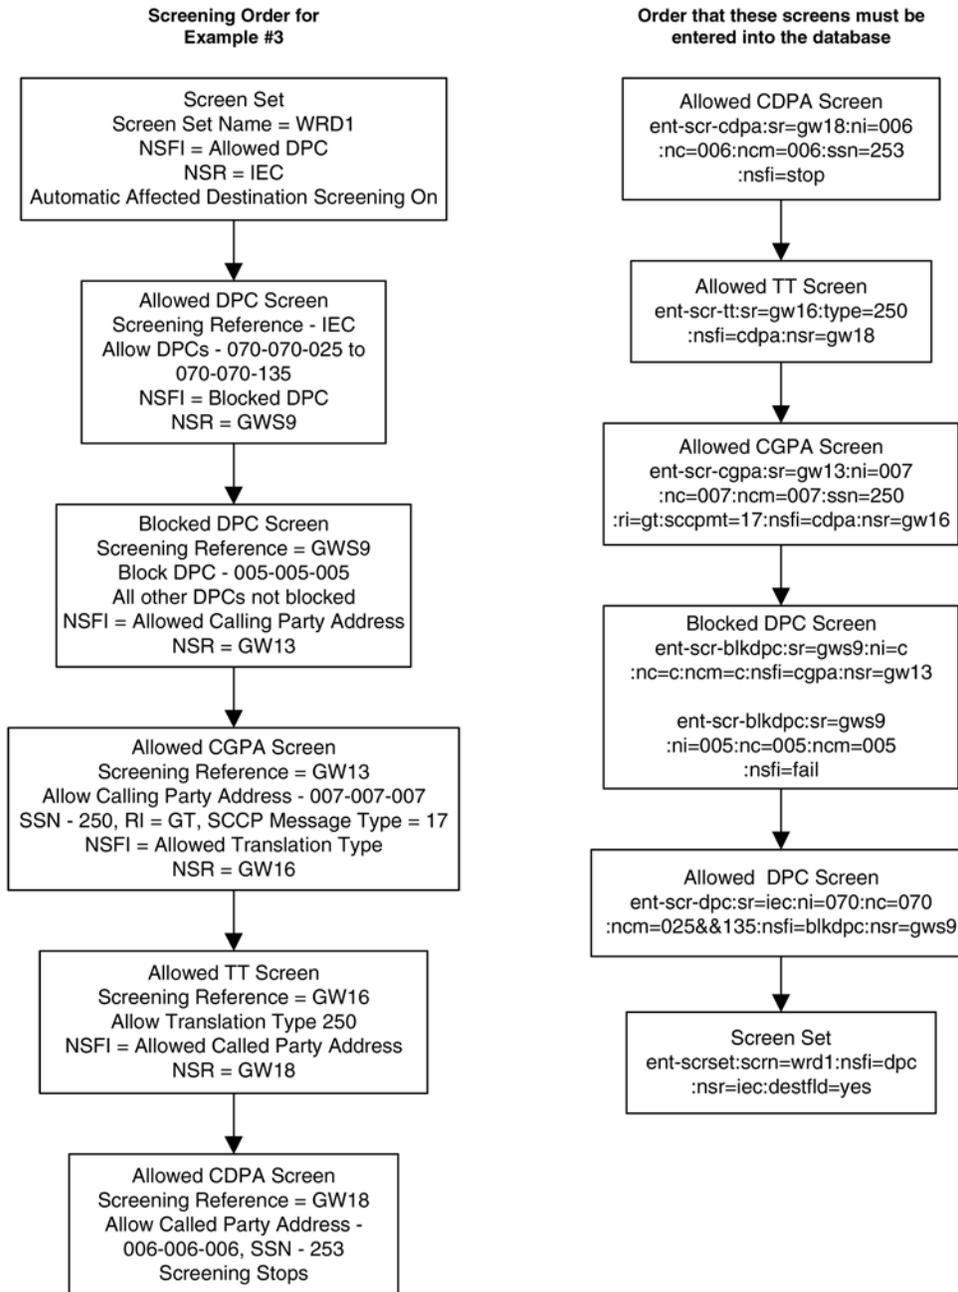

Example 4

Example 4 screens the messages in a linkset for the following criteria. [Figure 2-6](#) shows the screening order the EAGLE 5 ISS uses and the order that the screens must be entered into the database.

- Allow messages containing the following items into the EAGLE 5 ISS
The following SIO information:
 - The network indicator code of 2 (**nic=2**)
 - The service indicator of 3 (**si=3**)
 - Message priority of 3 (**pri=3**)The called party address (CDPA) 007-007-007 with the subsystem number of 001 and SCMG format ID of 100
The allowed affected point code (AFTPC) of 010-010-010 with the subsystem number of 015
- The message that passes the gateway screening criteria is copied for the STPLAN application (specified with the **actname** parameter and the name of the gateway screening stop action set containing the **COPY** gateway screening stop action).
- Automatic Destination Field screening is on.

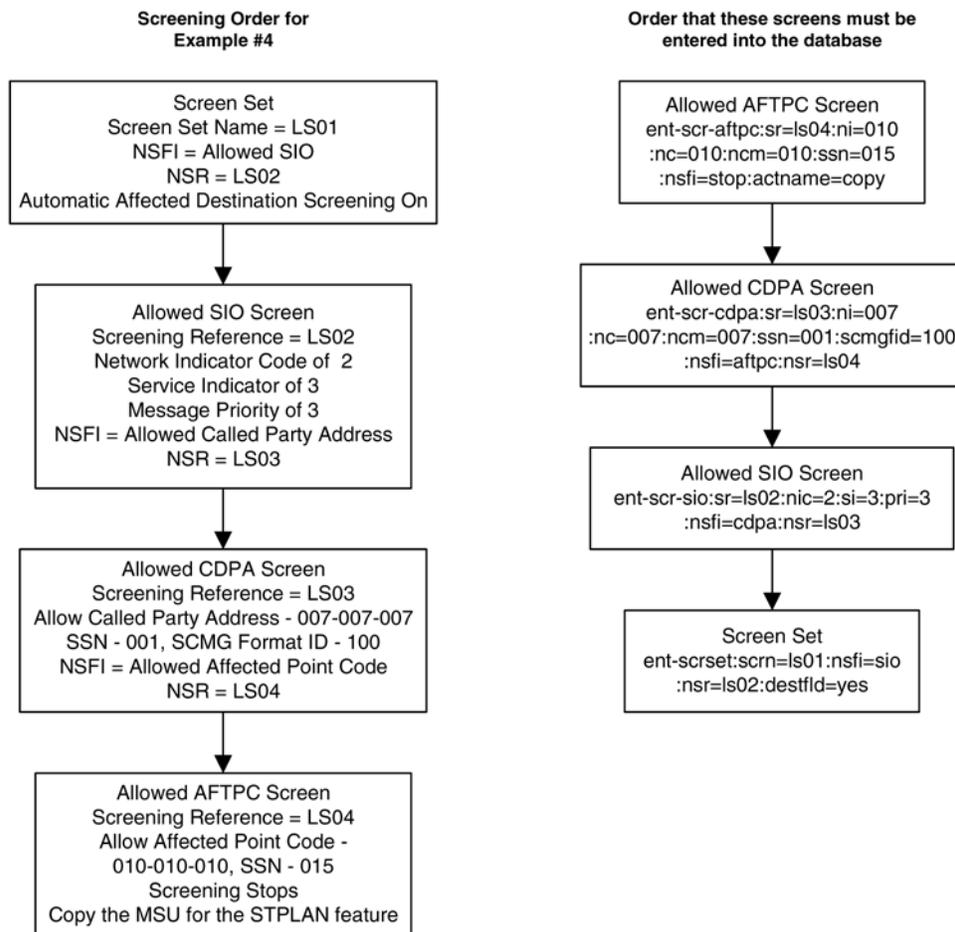Figure 2-6. Gateway Screening Configuration - Example 4

Example 5

Example 5 screens the messages in a linkset for the following criteria. [Figure 2-7](#) shows the screening order the EAGLE 5 ISS uses and the order that the screens must be entered into the database.

- Allow into the EAGLE 5 ISS messages containing the following items
The OPC 010-010-010


The following SIO information:

- The network indicator code of 2 (**nic=2**)
- The service indicator of 0 (**si=0**)
- Heading code 0 of 4 (**h0=4**)
- Heading code 1 of 5 (**h1=5**)
- Message priority of 3 (**pri=3**)

The allowed affected destination field (DESTFLD) of 100-100-100

- Block messages containing the OPC 020-020-020 from the EAGLE 5 ISS
- The message that passes the gateway screening criteria is copied for the STPLAN application and is redirected for the gateway screening redirect function (specified with the **actname** parameter and the name of the gateway screening stop action set containing the **COPY** and **RDCT** gateway screening stop actions).

Figure 2-7. Gateway Screening Configuration - Example 5

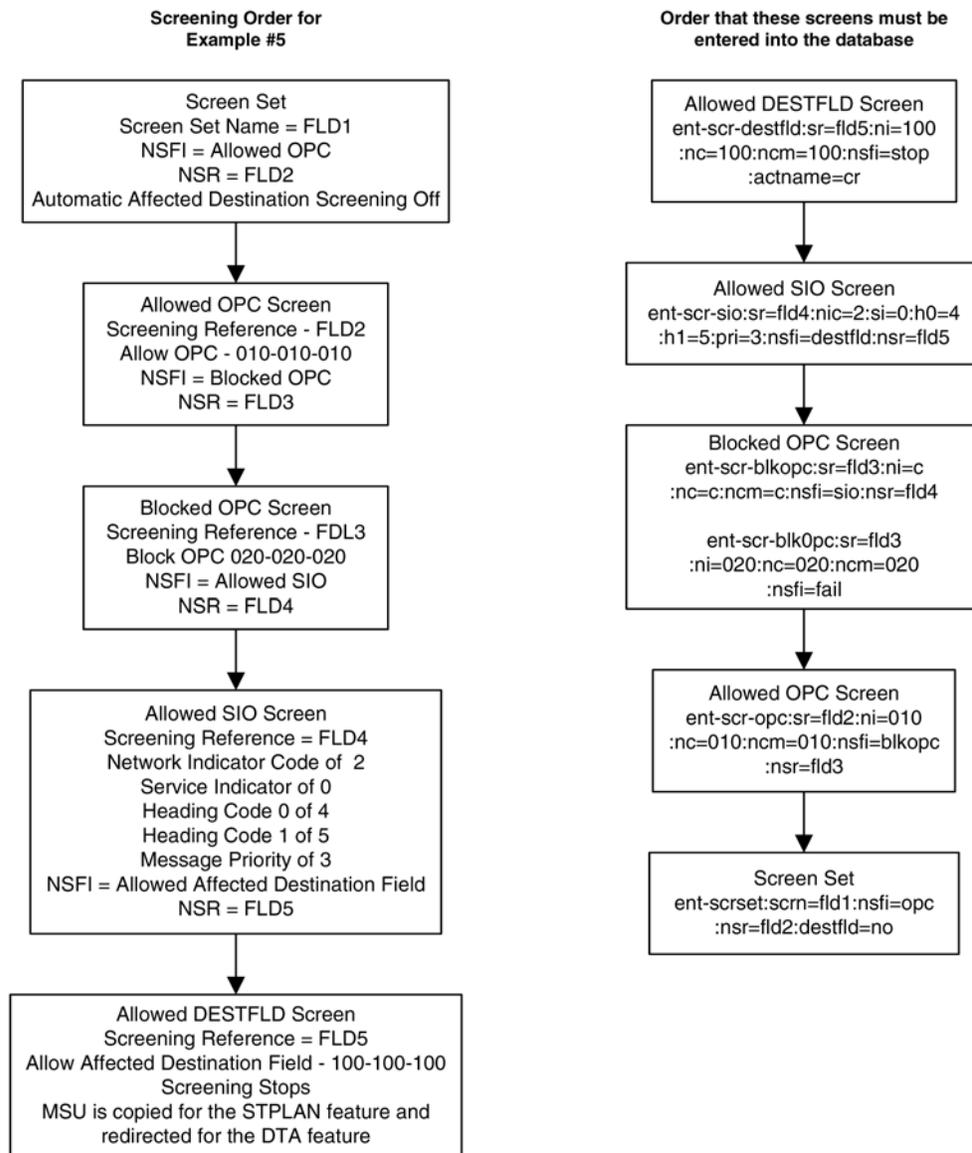

Example 6

Example 6 screens the messages in a linkset for the following criteria. [Figure 2-8](#) shows the screening order the EAGLE 5 ISS uses and the order that the screens must be entered into the database.

- Allow into the EAGLE 5 ISS messages containing the following items
The OPC 015-015-015


The following SIO information:

- The network indicator code of 2 (**nic=2**)
- The service indicator of 5 (**si=5**)
- Message priority of 3 (**pri=3**)

The allowed ISUP message type (ISUP) of 135

- Block messages containing the OPC 025-025-025 from the EAGLE 5 ISS
- The message that passes the gateway screening criteria is copied for the STPLAN application and is redirected for the gateway screening redirect function (specified with the **actname** parameter and the name of the gateway screening stop action set containing the **COPY** and **RDCT** gateway screening stop actions).

Figure 2-8. Gateway Screening Configuration - Example 6

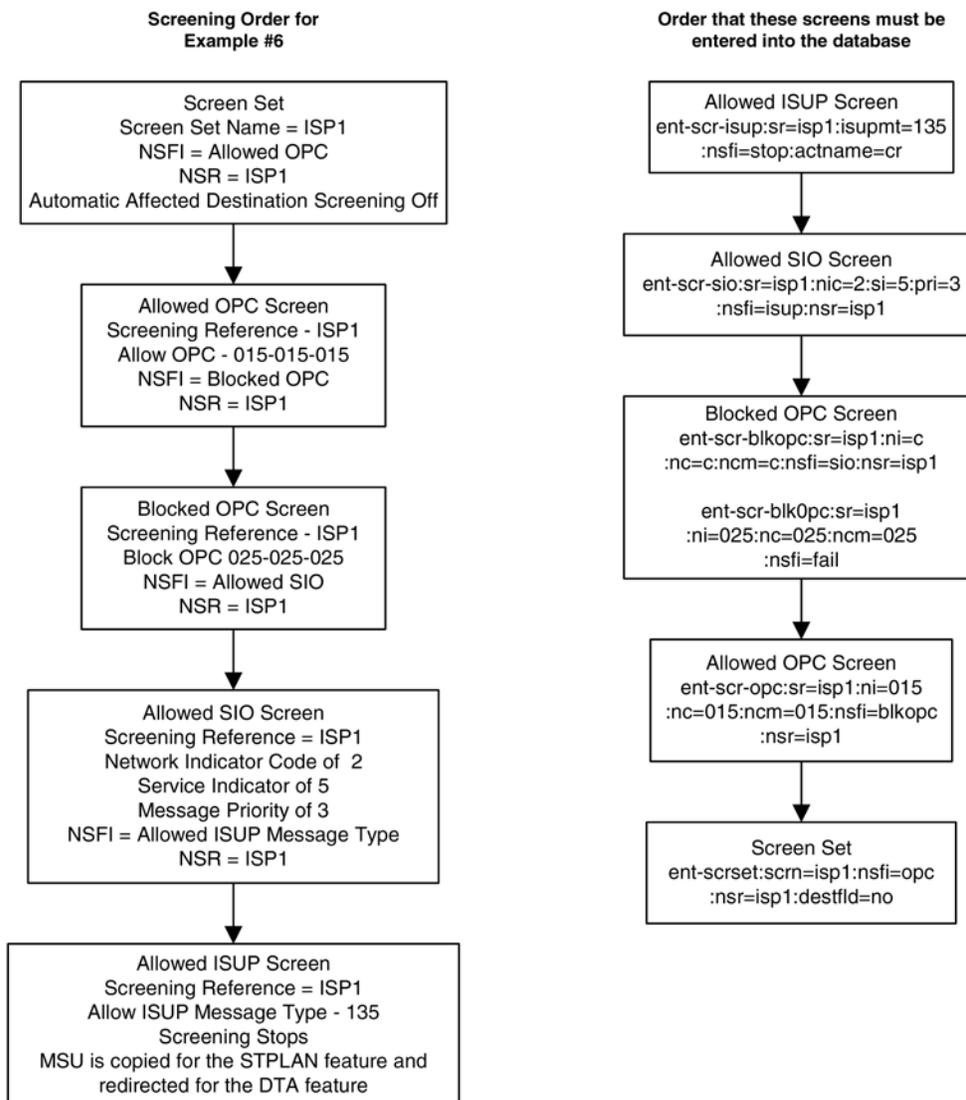


Example 7

Example 7 screens the messages in a linkset for the following criteria. [Figure 2-9](#) shows the screening order the EAGLE 5 ISS uses and the order that the screens must be entered into the database.

- Allow into the EAGLE 5 ISS messages containing the following items:
 - TUP messages containing these items:
 - The OPC 017-017-017
 - The DPC 050-034-049
 - The following SIO information:
 - ◆ The network indicator code of 2 (**nic=2**)
 - ◆ The service indicator of 4 (**si=4**)
 - ◆ Message priority of 3 (**pri=3**)
 - The allowed TUP message type of 100
 - ISUP messages containing these items:
 - The OPC 017-017-017
 - The DPC 073-200-059
 - The following SIO information:
 - ◆ The network indicator code of 2 (**nic=2**)
 - ◆ The service indicator of 5 (**si=5**)
 - ◆ Message priority of 3 (**pri=3**)
 - The allowed ISUP message type of 139
- The messages, both TUP and ISUP, that pass the gateway screening criteria are copied for the STPLAN application and are redirected for the gateway screening redirect function (specified with the **actname** parameter and the name of the gateway screening stop action set containing the **COPY** and **RDCT** gateway screening stop actions).

Figure 2-9. Gateway Screening Configuration - Example 7

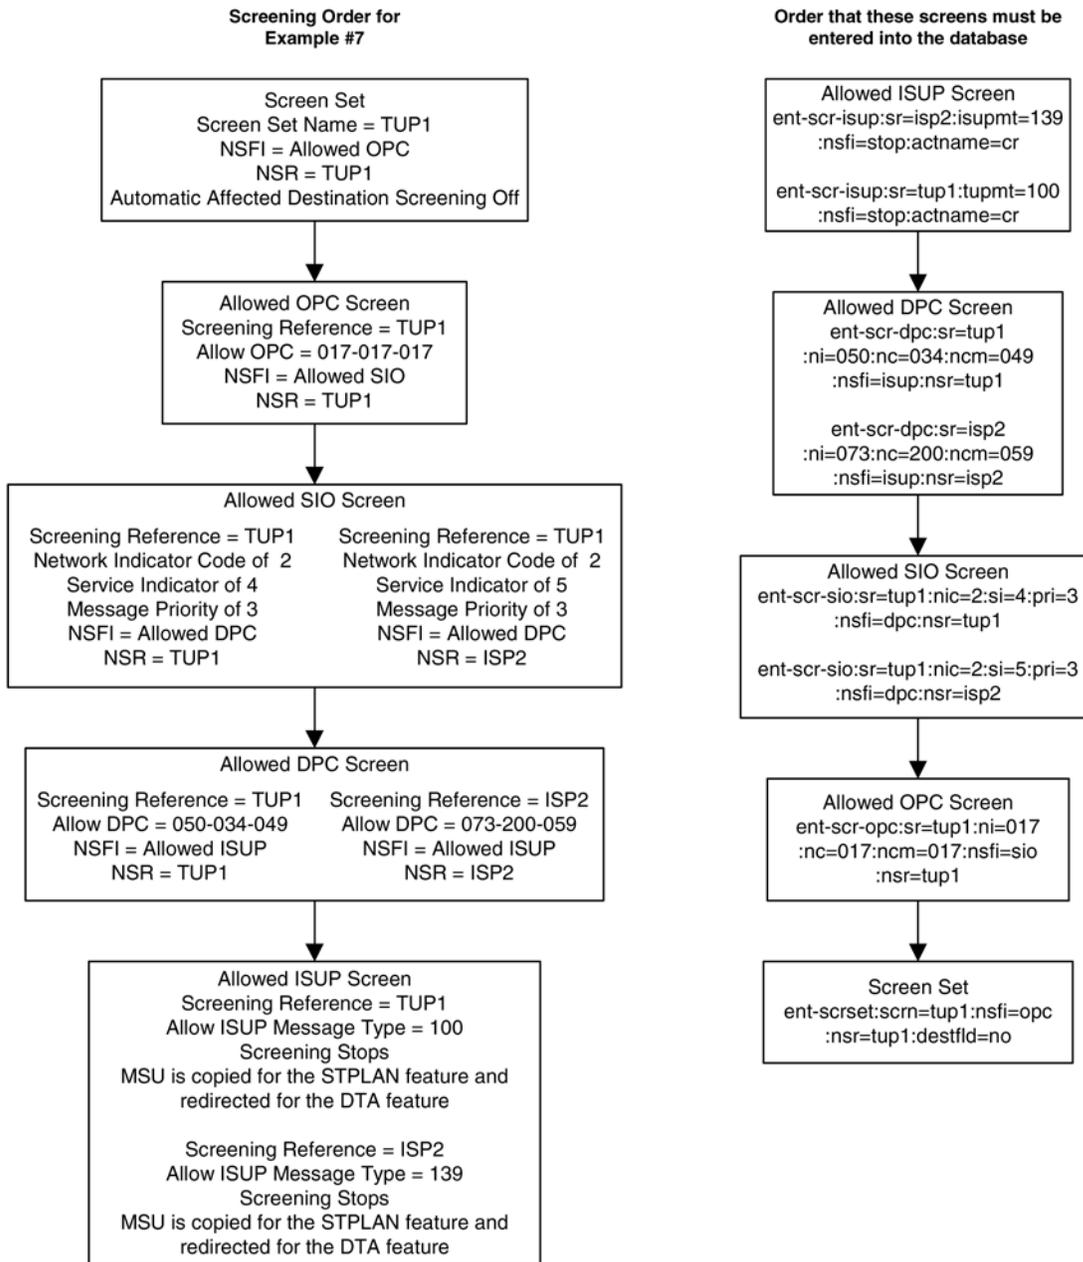

Adding an GLS Card

This procedure is used to add a TSM running the GLS GPL to support the gateway screening feature using the **ent-card** command. The **ent-card** command uses these parameters.

:loc – The location of the card being added to the database.

:type – The type of card being added to the database. For this procedure, the value of this parameter is **tsm**.

:appl – The application software or GPL that is assigned to the card. For this procedure, the value of this parameter is **gls**.

:force – Allow the LIM to be added to the database even if there are not enough cards running the SCCP GPL (either TSM or DSM) to support the number of LIMs in the EAGLE 5 ISS. This parameter is obsolete and is no longer used.

The shelf to which the card is to be added, must already be in the database. This can be verified with the **rtrv-shlf** command. If the shelf is not in the database, see the Adding a Shelf procedure in the *Database Administration Manual – System Management*.

The card cannot be added to the database if the specified card location already has a card assigned to it.

Before the TSM can be configured in the database for the gateway screening feature, the gateway screening feature must be turned on with the **chg-feat** command. The **rtrv-feat** command can verify that the gateway screening feature is on.

NOTE: Once the gateway screening feature is turned on with the chg-feat command, they cannot be turned off.

The EAGLE 5 ISS can contain a maximum of 8 TSMs running the GLS GPL.

The examples in this procedure are used to add a TSM running the GLS GPL in card slot 1214 to the database.

Procedure

1. Display the cards in the EAGLE 5 ISS using the **rtrv-card** command.

This is an example of the possible output. Cards should be distributed throughout the EAGLE 5 ISS for proper power distribution. Refer to the *Installation Manual - EAGLE 5 ISS* for the shelf power distribution. This is an example of the possible output.

```

rlghncxa03w 06-10-25 09:58:31 GMT EAGLE5 36.0.0
CARD  TYPE      APPL      LSET NAME      LINK SLC  LSET NAME      LINK SLC
1101  TSM          SCCP
1102  TSM          GLS
1113  GPSP        EOAM
1114  TDM-A
1115  GPSP        EOAM
1116  TDM-B
1117  MDAL
1201  LIMDS0      SS7ANSI   sp2           A    0    sp1           B    0
1203  LIMDS0      SS7ANSI   sp3           A    0
1204  LIMDS0      SS7ANSI   sp3           A    1
1206  LIMDS0      SS7ANSI   nsp3          A    1    nsp4          B    1
1207  LIMV35      SS7GX25   nsp1          A    0
1208  LIMV35      SS7GX25   nsp1          A    1
1216  ACMENET     STPLAN
1308  LIMDS0      SS7ANSI   sp6           A    1    sp7           B    0
1314  LIMDS0      SS7ANSI   sp7           A    1    sp5           B    1
1317  ACMENET     STPLAN

```

If the **APPL** field of the **rtrv-card** command output shows cards assigned to the **GLS** GPL, skip steps 2, and 3, and go to step 4.

2. Verify that the gateway screening feature is on, by entering the **rtrv-feat** command.

If the gateway screening feature is on, the **GWS** field should be set to **on**. For this example, the gateway screening feature is off.

NOTE: The rtrv-feat command output contains other fields that are not used by this procedure. If you wish to see all the fields displayed by the rtrv-feat command, see the rtrv-feat command description in the Commands Manual.

If the gateway screening feature is on, skip steps 3 and go to step 4. If the gateway screening feature is not on, go to step 3.

3. If the gateway screening feature is not on, shown by the **GWS = off** entry in the **rtrv-feat** command output in step 2, turn the gateway screening feature on by entering this command.

chg-feat:gws=on

NOTE: Once the gateway screening feature is turned on with the chg-feat command, it cannot be turned off.

When the **chg-feat** has successfully completed, this message should appear.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
CHG-FEAT: MASP A - COMPLTD
```

4. Verify that the TSM has been physically installed into the proper location.
5. Add the TSM to the database using the **ent-card** command.

For this example, enter this command.

ent-card:loc=1212:type=tsm:appl=glS

When each of these commands have successfully completed, this message should appear.

```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
ENT-CARD: MASP A - COMPLTD
```

6. Verify the changes using the **rtrv-card** command with the card location specified.

For this example, enter this command.

rtrv-card:loc=1212

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:29:30 GMT EAGLE5 36.0.0
CARD  TYPE      APPL      LSET NAME      LINK SLC  LSET NAME      LINK SLC
1212  TSM          GLS
```

7. Put the card in service using the **rst-card** command with the card location specified in step 5. For this example, enter this command.

rst-card:loc=1212

When this command has successfully completed, this message should appear.


```
rlghncxa03w 06-10-28 08:21:07 GMT EAGLE5 36.0.0
Card has been allowed.
```

8. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

These messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 2-1. Adding an GLS Card to the Database

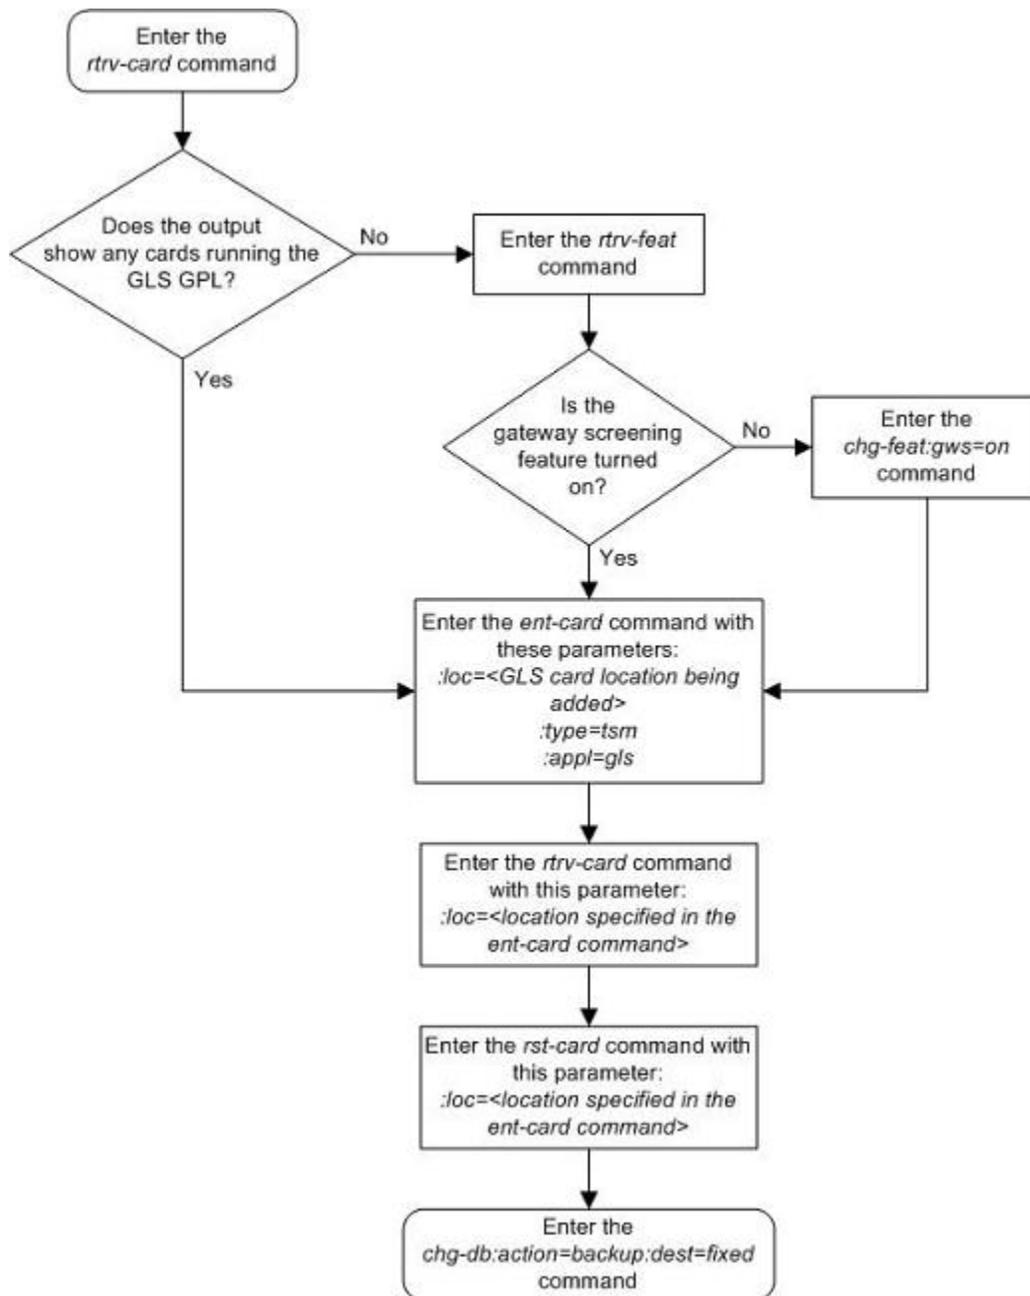

Removing a GLS Card

This procedure is used to remove GLS cards, used by gateway screening, from the database using the **dlr-card** command. The card cannot be removed if it does not exist in the database.



CAUTION: If the GLS card is the last GLS card in service, removing this card from the database will disable the gateway screening feature.

The examples in this procedure are used to remove the GLS card in card location 1205.

Canceling the REPT-STAT-CARD Command

Because the **rept-stat-card** command used in this procedure can output information for a long period of time, the **rept-stat-card** command can be canceled and the output to the terminal stopped. There are three ways that the **rept-stat-card** command can be canceled.

- Press the **F9** function key on the keyboard at the terminal where the **rept-stat-card** command was entered.
- Enter the **canc-cmd** without the **trm** parameter at the terminal where the **rept-stat-card** command was entered.
- Enter the **canc-cmd:trm=<xx>**, where **<xx>** is the terminal where the **rept-stat-card** command was entered, from another terminal other than the terminal where the **rept-stat-card** command was entered. To enter the **canc-cmd:trm=<xx>** command, the terminal must allow Security Administration commands to be entered from it and the user must be allowed to enter Security Administration commands. The terminal's permissions can be verified with the **rtrv-secu-trm** command. The user's permissions can be verified with the **rtrv-user** or **rtrv-secu-user** commands.

For more information about the **canc-cmd** command, go to the *Commands Manual*.

Procedure

1. Display the cards in the database using the **rtrv-card** command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 09:58:31 GMT EAGLE5 36.0.0
CARD  TYPE      APPL      LSET NAME      LINK SLC  LSET NAME      LINK SLC
1101  TSM          SCCP
1102  TSM          GLS
1103  ACMENET     STPLAN
1104  ACMENET     STPLAN
1113  GPSM        EOAM
1114  TDM-A
1115  GPSM        EOAM
1116  TDM-B
1117  MDAL
1201  LIMDS0     SS7ANSI   lsn1           A    0    lsn2           B    1
1202  LIMV35     SS7GX25   lsn2           A    0
1203  LIMV35     SS7ANSI   lsn2           A    0    lsn1           B    1
1205  TSM          GLS
```

2. Display the cards that are in service with the **rept-stat-card:stat=nr** command.

rept-stat-card:stat=nr

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
CARD  VERSION     TYPE      GPL      PST      SST      AST
1101  110-003-000  TSM      SCCP     IS-NR    Active   ---
1102  110-003-000  TSM      GLS      IS-NR    Active   ---
1103  110-002-000  ACMENET  STPLAN  IS-NR    Active   ---
1104  110-002-000  ACMENET  STPLAN  IS-NR    Active   ---
1109  109-003-000  HMUX     BPHMUX  IS-NR    Active   ---
1110  109-003-000  HMUX     BPHMUX  IS-NR    Active   ---
1201  110-003-000  LIMDS0   SS7ANSI  IS-NR    Active   ---
1202  110-002-000  LIMV35   SS7GX25  IS-NR    Active   ---
1203  110-003-000  LIMV35   SS7ANSI  IS-NR    Active   ---
```

1205	110-003-000	TSM	GLS	IS-NR	Active	---
1209	109-003-000	HMUX	BPHMUX	IS-NR	Active	---
1210	109-003-000	HMUX	BPHMUX	IS-NR	Active	---

- An GLS card is identified by the entry **GLS** in the **APPL** fields in the outputs in steps 1 and 2.

Remove the card from service using the **rmv-card** command and specifying the card location. If the GLS card to be inhibited is the only GLS card in service, shown in step 2, the **force=yes** parameter must also be specified. For this example, enter this command.

```
rmv-card:loc=1205
```

When this command has successfully completed, this message should appear.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
Card has been inhibited.
```

- Remove the card from the database using the **dlt-card** command.

The **dlt-card** command has only one parameter, **loc**, which is the location of the card. For this example, enter this command.

```
dlt-card:loc=1205
```

When this command has successfully completed, this message should appear.

```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
DLT-CARD: MASP A - COMPLTD
```

- Verify the changes using the **rtrv-card** command specifying the card that was removed in step 4.

For this example, enter this command.

```
rtrv-card:loc=1205
```

When this command has successfully completed, this message should appear.


```
E2144 Cmd Rej: Location invalid for hardware configuration
```

- Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

These messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 2-2. Removing a GLS Card

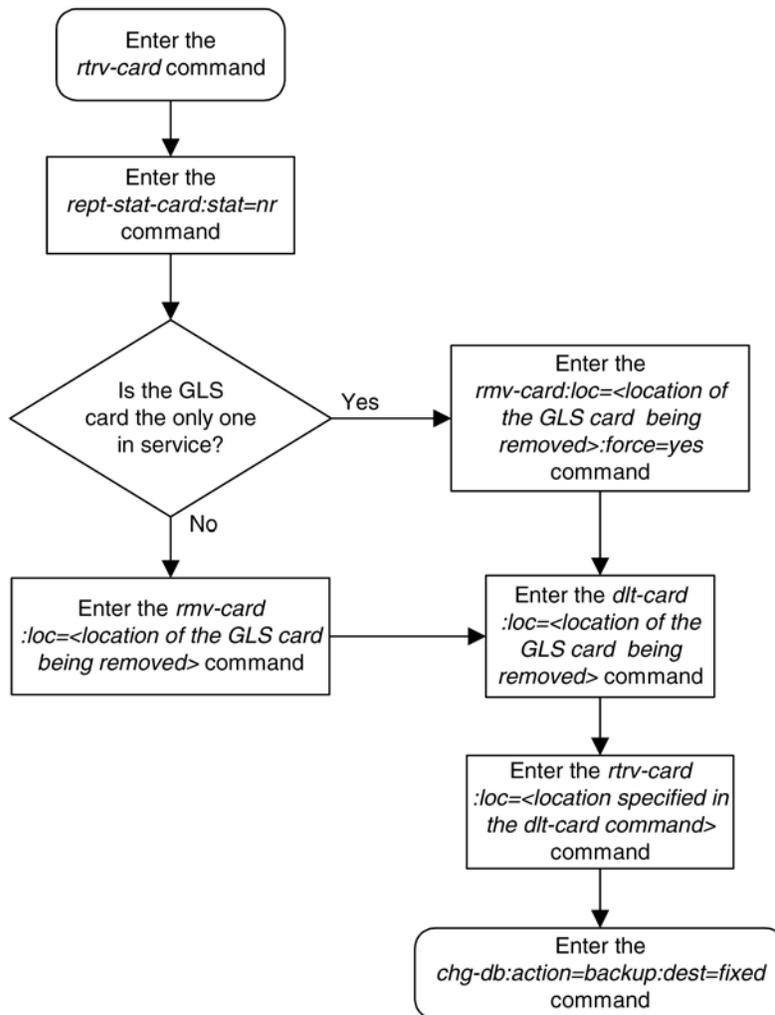

Configuring Gateway Screening Stop Action Sets

This procedure is used to add a gateway screening stop action set to the database or change an existing gateway screening stop action set using the **chg-gws-actset** command.

The gateway screening stop action sets define the actions that are performed on the MSU when the gateway screening process has stopped. These gateway screening stop action sets replace the **copy** and **redirect** parameters that have been used with the gateway screening commands when the gateway screening process stops.

The database can contain a maximum of 16 gateway screening stop action sets, with each set containing a maximum of 10 gateway screening stop actions. Five gateway screening stop actions have been defined.

- COPY – copy the MSU for the STPLAN feature
- RDCT – redirect the MSU for the DTA feature

- CNCF – convert the PIP parameter with the GN parameter or the GN parameter with the PIP parameter in the ISUP IAM message for the Calling Name Conversion Facility feature.
- TLNP – ISUP IAMs that pass gateway screening are processed either by the ISUP NP with EPAP feature or by the Triggerless LNP feature. This gateway screening stop action is discussed in more detail in the [Configuring TLNP Gateway Screening Stop Action Sets](#) procedure.
- TINP – ISUP IAMs that pass gateway screening are intercepted by the Triggerless ISUP based Number Portability (TINP) feature and converted to include the routing number (RN) if the call is to a ported number. This gateway screening stop action can be specified only if the TINP feature is enabled. The TINP gateway screening stop action cannot be specified with either the CNCF, TLNP, or RDCT gateway screening actions in the same gateway screening action set. After the TINP feature is enabled and turned on, the ISUP NP with EPAP feature (if the ISUP NP with EPAP feature is enabled) is overridden. All messages delivered to either the TLNP or TINP stop action will be processed by TINP feature.
- NONE – no action is performed on the MSU



CAUTION: When Gateway Screening is in the screen test mode, as defined by the linkset parameters `gwsa=off` and `gwsn=on`, any action in the gateway screening stop action sets created in this procedure will be performed.

The `chg-gws-actset` command uses these parameters.

:actid – The ID number of the gateway screening stop action set. The value of this parameter is from 4 to 16.

:actname – The name of the gateway screening stop action set consisting of 1 alphabetic character followed by up to 5 alphanumeric characters.

:force – The `force=yes` parameter must be specified when changing the gateway screening stop actions of an existing gateway screening stop action set.

:all=none – sets the value of each gateway screening stop action in the gateway screening stop action set to `none`.

:act1 to **:act10** – The ten gateway screening stop actions for each gateway screening stop action set. Gateway screening stop action 1 (**act1**) is the first stop action to be performed and gateway screening stop action 10 (**act10**) is the last stop action to be performed on the MSU.

The first three gateway screening stop action sets (**actid=1**, **actid=2**, and **actid=3**) are already defined with the existing gateway screening stop actions shown in [Table 2-9](#) and [Table 2-10](#) .

Table 2-9. Gateway Screening Stop Action Definitions If the CNCF Feature Is Off

Gateway Screening Stop Action ID	Gateway Screening Stop Action Set Name	Stop Action 1	Stop Action 2	Action Performed by the EAGLE 5 ISS
1	copy	copy	—	copy the MSU for the STPLAN feature
2	rdct	rdct	—	redirect the MSU for the DTA feature
3	cr	copy	rdct	copy the MSU for the STPLAN feature and redirect the MSU for the DTA feature

Table 2-10. Gateway Screening Stop Action Definitions If the CNCF Feature Is On

Gateway Screening Stop Action ID	Gateway Screening Stop Action Set Name	Stop Action 1	Stop Action 2	Action Performed by the EAGLE 5 ISS
1	copy	copy	—	copy the MSU for the STPLAN feature
2	cncf	cncf	—	convert the PIP parameter with the GN parameter or the GN parameter with the PIP parameter in the ISUP IAM message for the Calling Name Conversion Facility feature.
3	cpcncf	copy	cncf	copy the MSU for the STPLAN feature and convert the PIP parameter with the GN parameter or the GN parameter with the PIP parameter in the ISUP IAM message for the Calling Name Conversion Facility feature.

The word **none** cannot be used for the **actname** parameter.

No other optional parameters can be specified **all=none** parameter.

The **force=yes** parameter must be specified when changing an existing gateway screening stop action set.

If the **cncf** value is specified for the **act1** through **act10** parameters, the CNCF feature must be on. This can be verified with the **rtrv-feat** command. The **cncf=on** field in the **rtrv-feat** command output shows that the CNCF feature is on.

If the **copy** gateway screening action is specified with the **chg-gws-actset** command, it must be specified with the **act1** parameter.

A specific gateway screening stop action can only be specified once in a specific gateway screening stop action set. For example, the **chg-gws-actset** command cannot be executed if the **copy** gateway screening stop action is specified for gateway screening stop action parameters **act1** and **act2** as shown in this command example.

```
chg-gws-actset:actid=4:act1=copy:act2=copy
```

The gateway screening stop action set can only have one **copy**, **cncf**, **rdct**, or **tlnp** gateway screening stop action.

The value of the **actname** parameter must be unique. The value of this parameter is used by the **actname** parameter in the gateway screening commands and is shown in the **NSR/ACT** field of the outputs of the retrieve gateway screening commands to define the action that is performed on the MSU that passes gateway screening.

If the redirect gateway screening action (**rdct**) is specified with other gateway screening stop actions, it must be specified with the last gateway screening stop action parameter specified with the **chg-gws-actset** command. For example, the **chg-gws-actset** command is specified with three gateway screening stop actions (using parameters **act1**, **act2**, and **act3**) with one of the stop actions being the redirect gateway screening stop action. The redirect gateway screening stop action must be specified with the **act3** parameter.

When a gateway screening stop action set is being entered in to the database for the first time, the name of the gateway screening stop action set (**actname**) must be added to the database before any gateway screening stop actions are assigned to the gateway screening stop action set.

The **tlnp** gateway screening stop action cannot be specified with either the **cncf** (calling name conversion facility) or **rdct** (redirect) gateway screening actions in the same gateway screening action set.

The examples in this procedure are used to create four new gateway screening stop action sets. The CNCF feature is not on.

Table 2-11. Sample Gateway Screening Stop Action Set Configuration

ACTID	ACTNAME	ACT1	ACT2	ACT3
4	CNCF	cncf	—	—
5	CPCNCF	copy	cncf	—
6	CNCFRD	cncf	rdct	—
7	CPCFRD	copy	cncf	rdct
8	CPTINP	copy	tinp	—
9	TINP	tinp	—	—

Procedure

1. Verify that the gateway screening feature is turned on, by entering the `rtrv-feat` command.

If the gateway screening feature is turned on, the **GWS** field should be set to **on**. In this example, the gateway screening feature is off.

NOTE: The `rtrv-feat` command output contains other fields that are not used by this procedure. If you wish to see all the fields displayed by the `rtrv-feat` command, see the `rtrv-feat` command description in the *Commands Manual*.

If the gateway screening feature is turned on, go to step 3.

2. If the gateway screening feature is not turned on, shown by the **GWS = off** entry in the `rtrv-feat` command output in step 1, turn it on by entering this command.

```
chg-feat:gws=on
```

NOTE: Once the gateway screening feature is turned on with the `chg-feat` command, it cannot be turned off.

When this command has successfully completed, this message should appear.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
CHG-FEAT: MASP A - COMPLTD
```

3. Display the gateway screening stop action sets in the database with the `rtrv-gws-actset` command.

Action IDs 1, 2, and 3 are predefined and cannot be changed. Action ID 1 contains only the COPY stop action. Action ID 2 contains either the RDCT or CNCF stop action. Action ID 3 contains the COPY and either the RDCT or CNCF stop actions as shown in the following output examples.

```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
ACT ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT
ID  NAME  1    2    3    4    5    6    7    8    9    10
--  ---  ---  ---  ---  ---  ---  ---  ---  ---  ---  ---
1   copy  copy
2   cncf  cncf
3   cpcncf copy cncf
GWS action set table is (3 of 16) 19% full
```

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
ACT ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT
ID  NAME  1    2    3    4    5    6    7    8    9    10
--  ---  ---  ---  ---  ---  ---  ---  ---  ---  ---  ---
1   copy  copy
2   rdct  rdct
```

```
3 cr copy rdct
GWS action set table is (3 of 16) 19% full
```

NOTE: If the CNCF stop action is shown in the `rtrv-gws-actset` output in step 3, or if the `rtrv-feat` output in step 1 shows that the CNCF feature is on, skip step 4 and go to step 5.

4. If the calling name conversion facility feature is not turned on, shown by the `CNCF = off` entry in the `rtrv-feat` command output in step 1, turn it on by entering this command.

```
chg-feat:cncf=on
```

NOTE: Once the calling name conversion facility feature is turned on with the `chg-feat` command, it cannot be turned off.

When this command has successfully completed, this message should appear.

```
rlghncxa03w 06-10-25 15:29:30 GMT EAGLE5 36.0.0
CHG-FEAT: MASP A - COMPLTD
```

NOTE: If the TINP stop action will not be specified in this procedure, skip step 5 and step 6, and go to step 7.

5. The TINP stop action cannot be specified in this procedure if the `ansigflex` option is set to `yes`. Display the `ansigflex` option setting by entering the `rtrv-stpopts` command. This is an example of the possible output.

```
rlghncxa03w 07-05-17 16:02:05 GMT EAGLE5 37.2.0
STP OPTIONS
-----
ANSIGFLEX yes
```

NOTE: The `rtrv-stpopts` command output contains other fields that are not used by this procedure. If you wish to see all the fields displayed by the `rtrv-stpopts` command, see the `rtrv-stpopts` command description in the *Commands Manual*.

If the `ansigflex` option is set to `yes`, the TINP stop action cannot be configured in this procedure. Skip step 6 and go to step 7 and configure stop action sets without the TINP stop action.

6. Display the features that are enabled by entering the `rtrv-ctrl-feat` command. The following is an example of the possible output.

```
rlghncxa03w 07-05-30 21:15:37 GMT EAGLE5 37.2.0
The following features have been permanently enabled:
```

Feature Name	Partnum	Status	Quantity
Command Class Management	893005801	off	----
Intermed GTT Load Sharing	893006901	off	----
XGTT Table Expansion	893006101	off	----
XMAP Table Expansion	893007710	on	3000
Large System # Links	893005910	on	2000
Routesets	893006401	on	6000
GSM MAP SRI Redirect	893014001	on	----
ISUP NP with EPAP	893013801	on	----
HC-MIM SLK Capacity	893012707	on	64

The following features have been temporarily enabled:

```
Feature Name Partnum Status Quantity Trial Period Left
Zero entries found.
```

The following features have expired temporary keys:

```
Feature Name Partnum
Zero entries found.
```

If the Triggerless ISUP based Number Portability feature is enabled, shown by the entry TINP in the **rtrv-ctrl-feat** output, go to step 7.

If the LNP feature is enabled, shown by the entries LNP ELAP Configuration and LNP ported TNs in the **rtrv-ctrl-feat** output, the TINP stop action cannot be configured in this procedure. Go to step 7 and configure stop action sets without the TINP stop action.

If the TINP feature is not enabled, perform the procedures in the *Feature Manual - G-Port* and enable the TINP feature. After the TINP feature is enabled, go to step 7.

7. Add the gateway screening stop action to the database by using the **chg-gws-actset** command.

For this example, enter these commands based on the sample configuration shown in [Table 2-11](#).

```
chg-gws-actset:actid=4:actname=cncf:act1=cncf
```

```
chg-gws-actset:actid=5:actname=cpcncf:act1=copy:act2=cncf
```

```
chg-gws-actset:actid=6:actname=cncfrd:act1=cncf:act2=rdct
```

```
chg-gws-actset:actid=7:actname=cpcfrd:act1=copy:act2=cncf :act3=rdct
```

```
chg-gws-actset:actid=8:actname=cptinp:act1=copy:act2=tinp
```

```
chg-gws-actset:actid=9:actname=tinp:act1=tinp
```

If you wish to remove the gateway screening stop actions from an existing gateway screening stop action set (stop action sets 4 through 16), enter the **chg-gws-actset** command with the **all=none**, **actid**, and **force=yes** parameters, as shown in this command example.

```
chg-gws-actset:actid=4:all=none:force=yes
```

If you wish to remove individual gateway screening stop actions from an existing gateway screening stop action set (stop action sets 4 through 16), enter the **chg-gws-actset** command with the stop action parameter (**act1** through **act10**) value equal to none and the **force=yes** parameter, as shown in this command example.

```
chg-gws-actset:actid=4:act1=none:force=yes
```

If an existing gateway screening stop action set is being changed, the **force=yes** parameter must be specified with the **chg-gws-actset** command.

The **force=yes** parameter can be specified with the **chg-gws-actset** command if a new GWS stop action set is being created, but is not necessary.

The CNCF feature must be on to specify the CNCF GWS stop action.

The TINP feature must be enabled to specify the TINP gateway screening stop action. The TINP stop action cannot be in the same stop action set with the CNCF, TLNP, or RDCT stop actions.

The **actname** parameter must be specified for a new GWS stop action set. The **actname** parameter is not required, but can be specified, if an existing stop action set is being changed.

If the **actname** parameter value is different from what is shown in the **rtrv-gws-actset** output for the GWS stop action set being changed, the name of the GWS stop action set will be changed to the new **actname** parameter value (see the first Caution).



CAUTION: Changing the name of an existing GWS stop action set will prevent the actions defined in the GWS stop action set from being used to process the MSUs that pass gateway screening. If the name of the GWS stop action set is changed, enter the gateway

screening retrieve commands (`rtrv-scrset`, `rtrv-scr-opc`, `rtrv-scr-blkopc`, `rtrv-scr-sio`, `rtrv-scr-dpc`, `rtrv-scr-blkdpc`, `rtrv-scr-destfld`, `rtrv-scr-isup`, `rtrv-scr-cgpa`, `rtrv-scr-tt`, `rtrv-scr-cdpa`, and `rtrv-scr-aftpc`) with the `actname` parameter and the old GWS stop action set name to identify the screens that need to be changed to use the new GWS stop action set name. To change these screens, perform the appropriate procedures in Chapters [Chapter 3 Allowed Affected Point Code \(AFTPC\) Screen Configuration](#) through [Chapter 15 Allowed ISUP Message Type Screen Configuration](#) in this manual.



CAUTION: Caution must be used when changing the stop actions in existing gateway screening stop action sets because these gateway screening stop action sets may be used by one or more gateway screening rules. Changes in the existing gateway screening stop action sets will change how MSUs that pass gateway screening are processed.



CAUTION: Caution must be used when specifying the RDCT stop action in an existing GWS stop action set. Specifying the RDCT stop action for Allowed OPC screens containing the adjacent point code of a linkset, for Allowed SIO screens containing the service indicator values 1 (SI=1) or 2 (SI=2), or for Allowed DPC screens containing the EAGLE 5 ISS's point code can cause signaling link failures. To verify whether or not the GWS stop action set name used in this procedure is referenced by these screens, enter the `rtrv-scr-opc`, `rtrv-scr-sio`, or `rtrv-scr-dpc` commands, with the `actname` parameter and the GWS stop action set name used in this procedure.

When each of these commands have successfully completed, this message should appear.

```
rlghncxa03w 06-10-25 15:30:30 GMT EAGLE5 36.0.0
CAUTION: GWS action set may be referenced by one or more GWS rules
CHG-GWS-ACTSET: MASP A - COMPLTD
```

- Verify the changes using the `rtrv-gws-actset` command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:31:30 GMT EAGLE5 36.0.0
ACT ACT ACT ACT ACT ACT ACT ACT ACT ACT
ID NAME 1 2 3 4 5 6 7 8 9 10
--
1 copy copy
2 rdct rdct
3 cr copy rdct
4 cncf cncf
5 cpncf copy cncf
6 cncfrd cncf rdct
7 cpcfrd copy cncf rdct
8 cptinp copy tinp
9 tinp tinp
```


GWS action set table is (9 of 16) 56% full


- Backup the new changes using the `chg-db:action=backup:dest=fixed` command.


These messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.


```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```


Flowchart 2-3. Configuring Gateway Screening Stop Action Sets

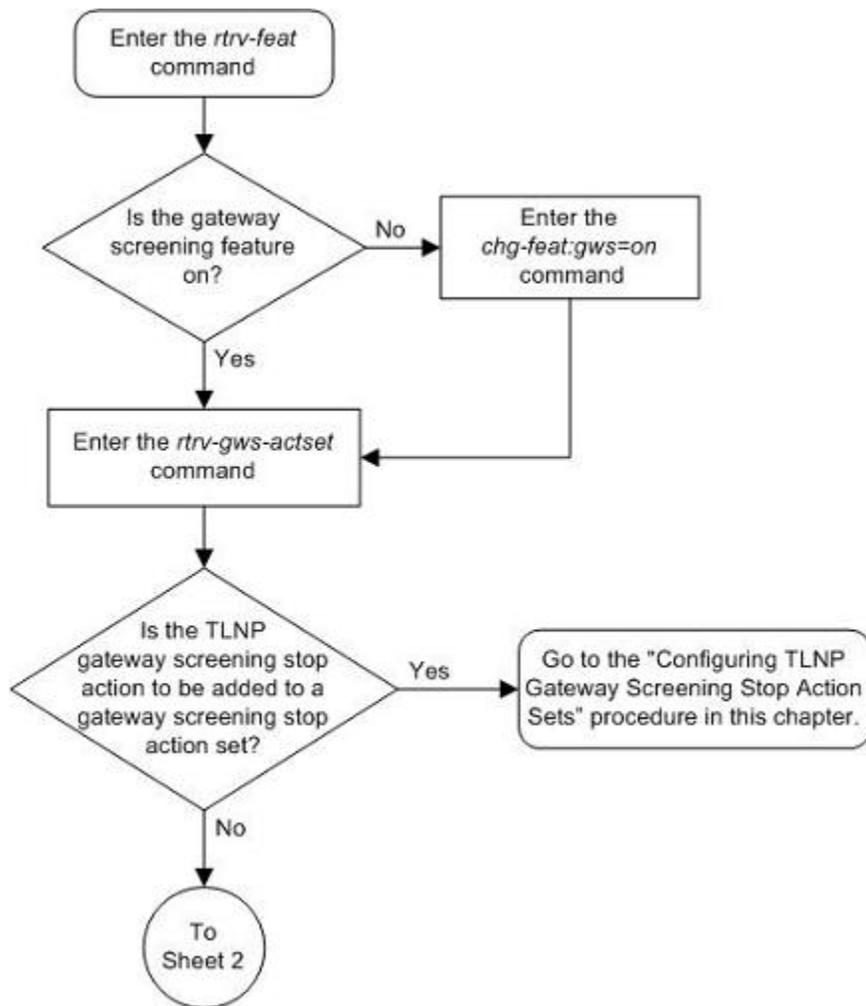


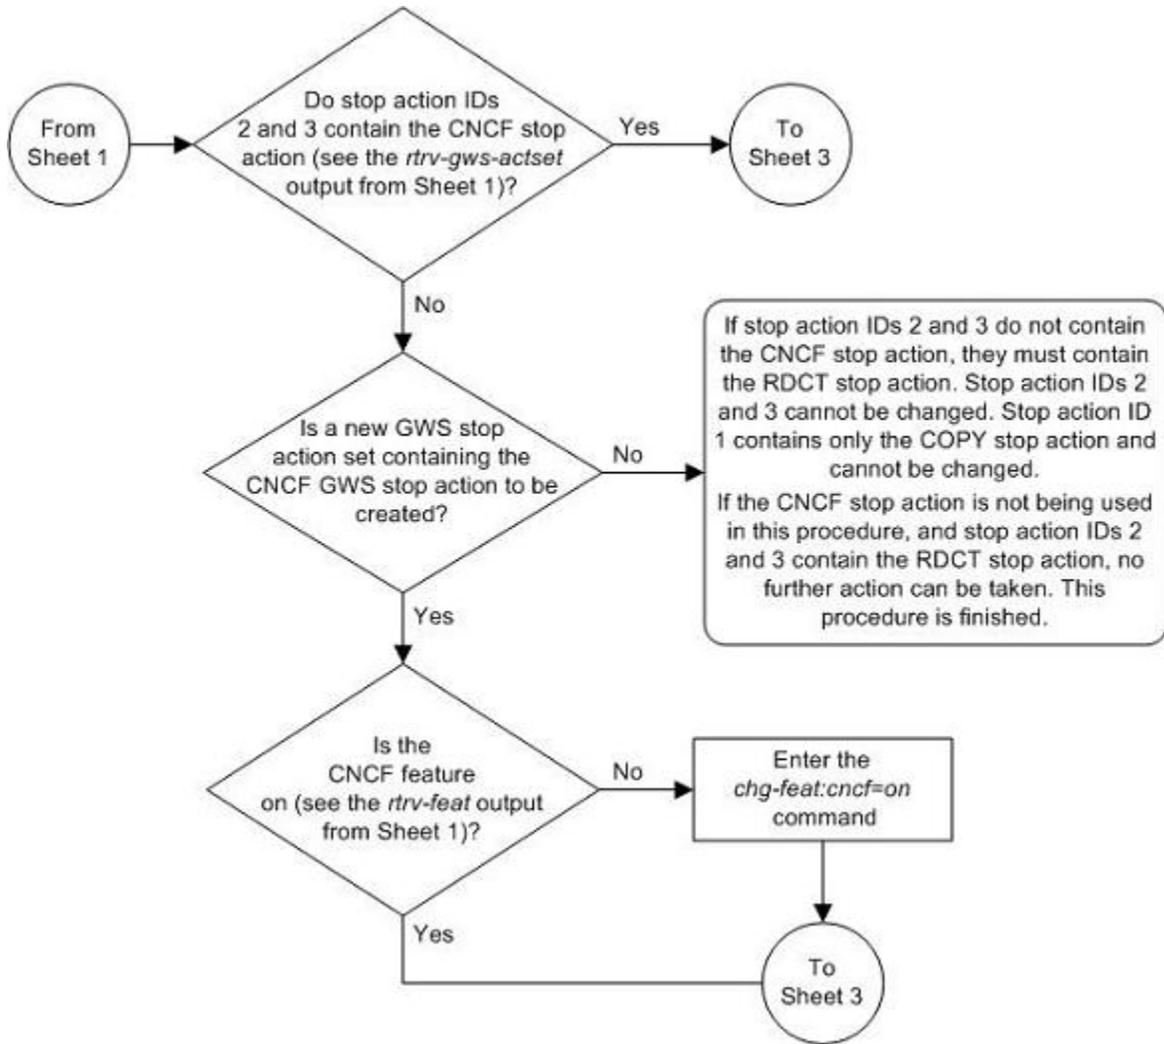

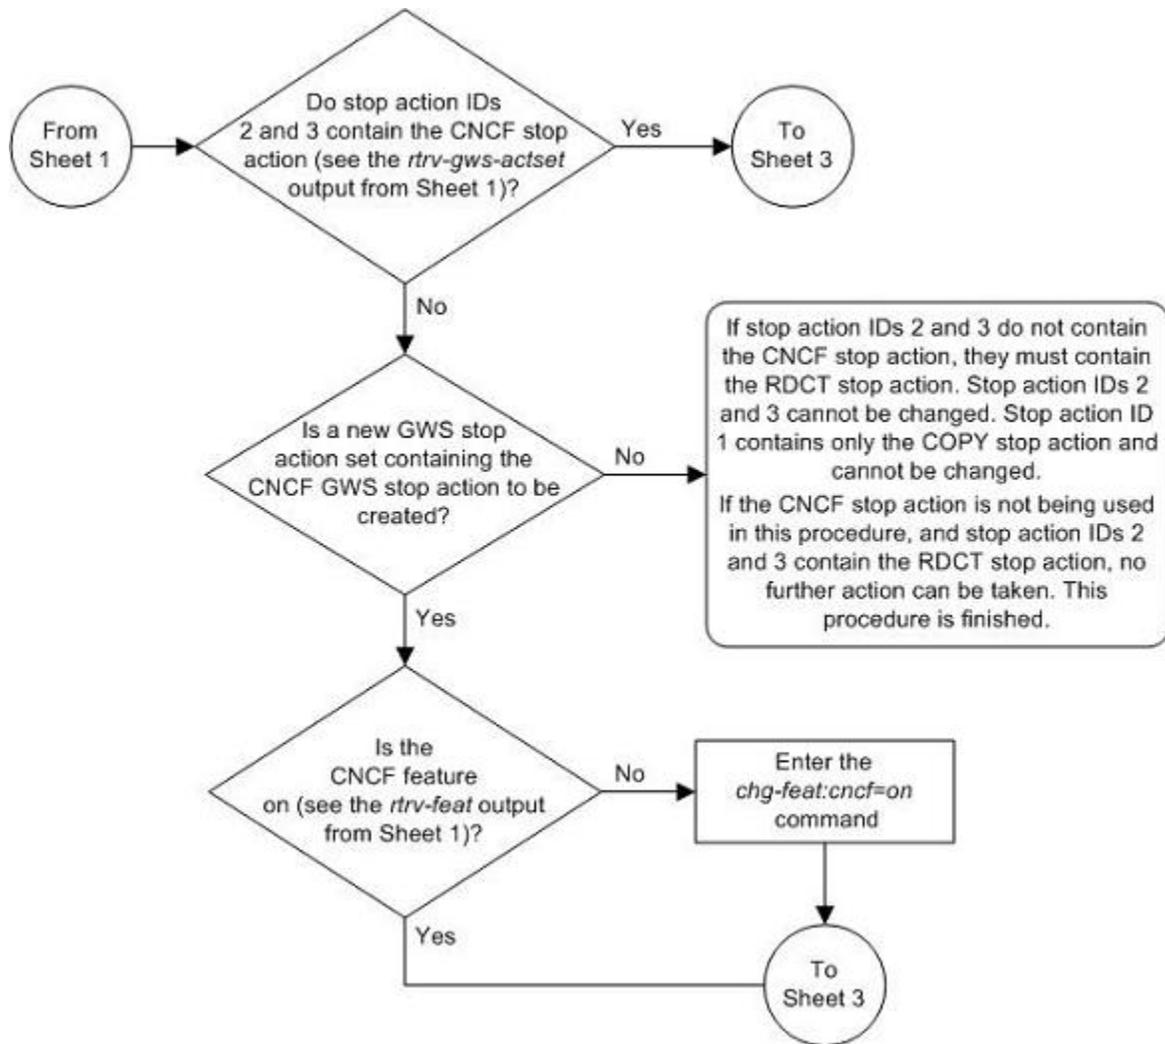

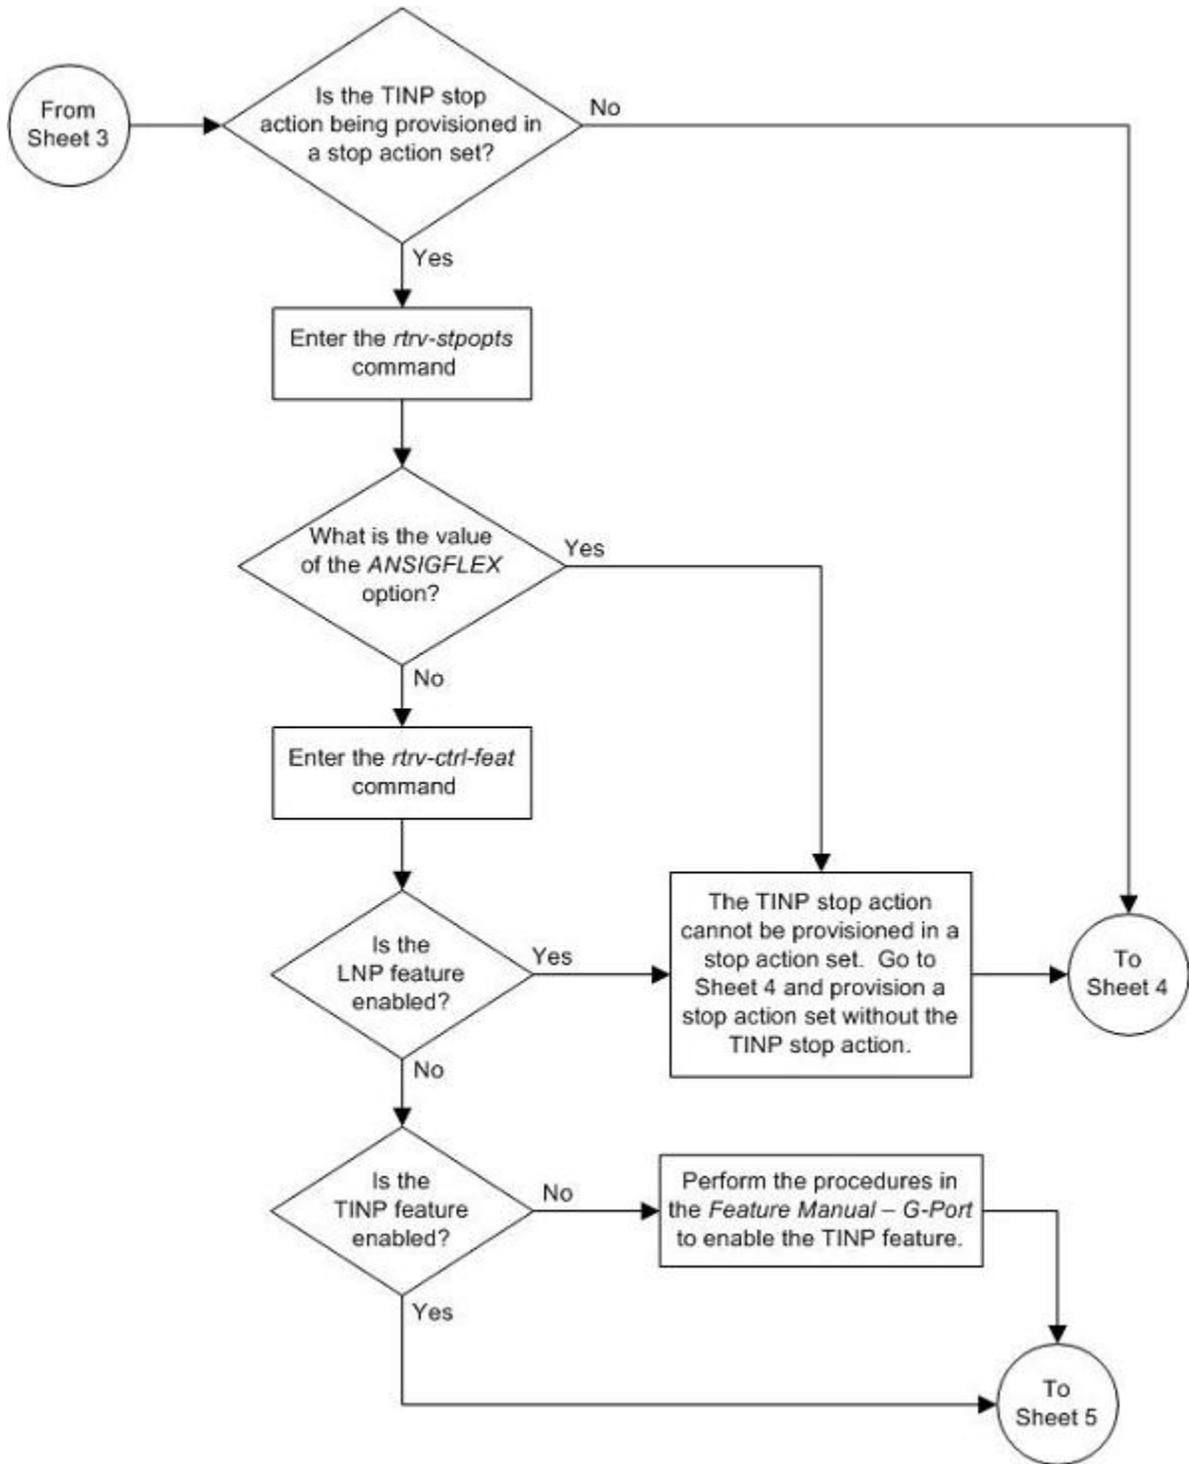

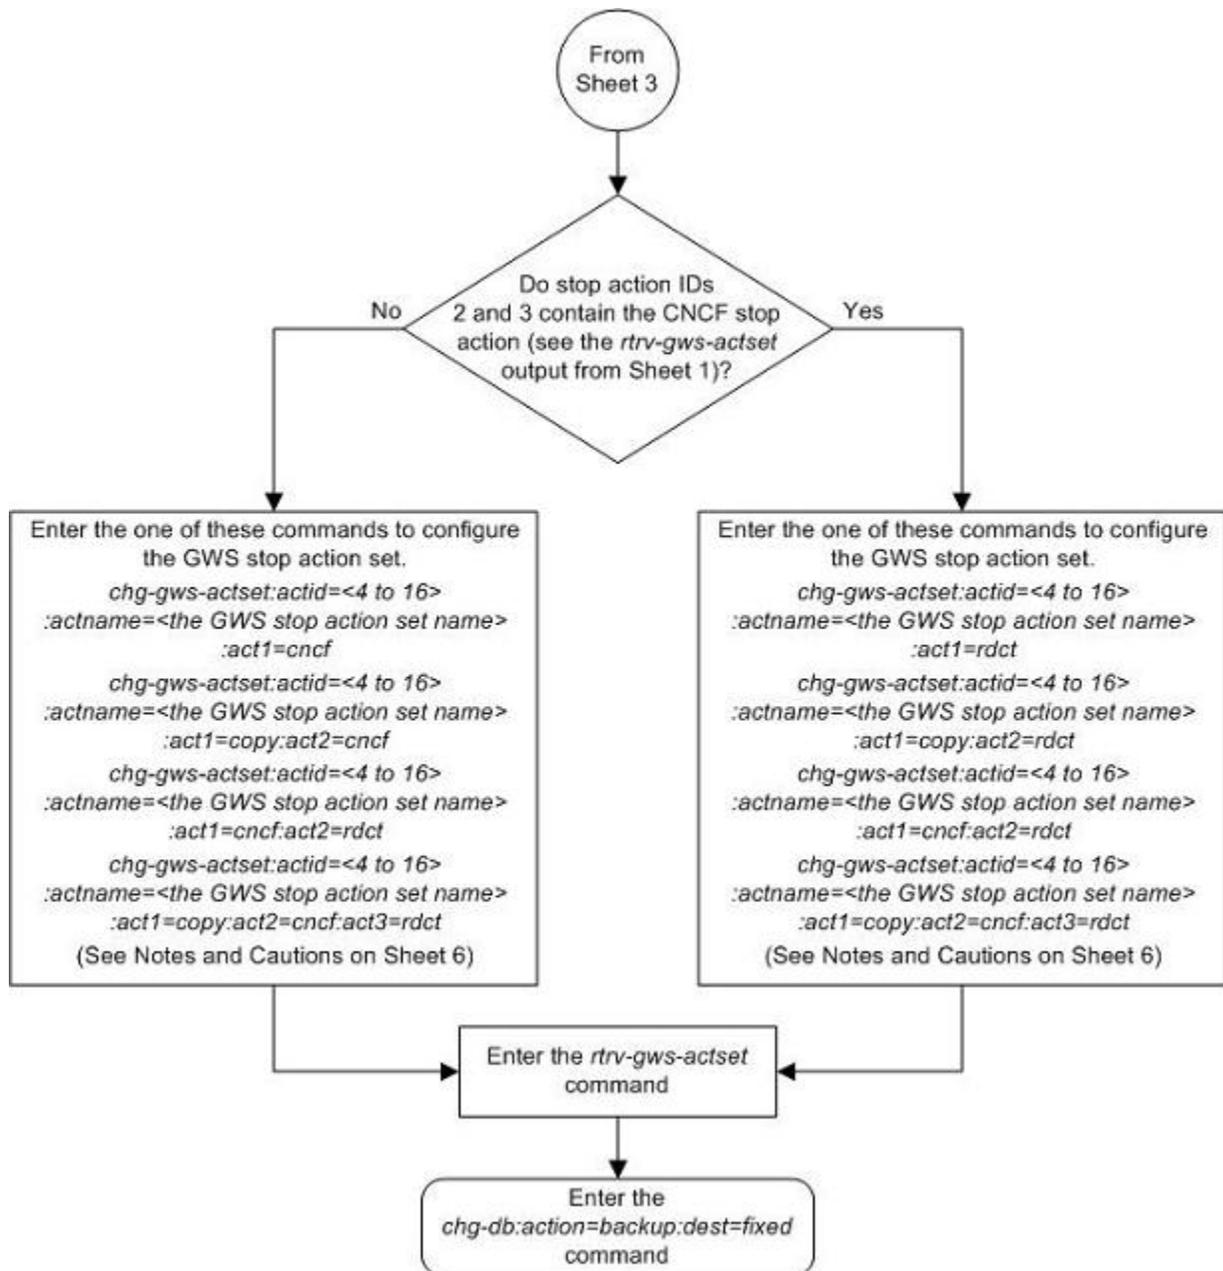

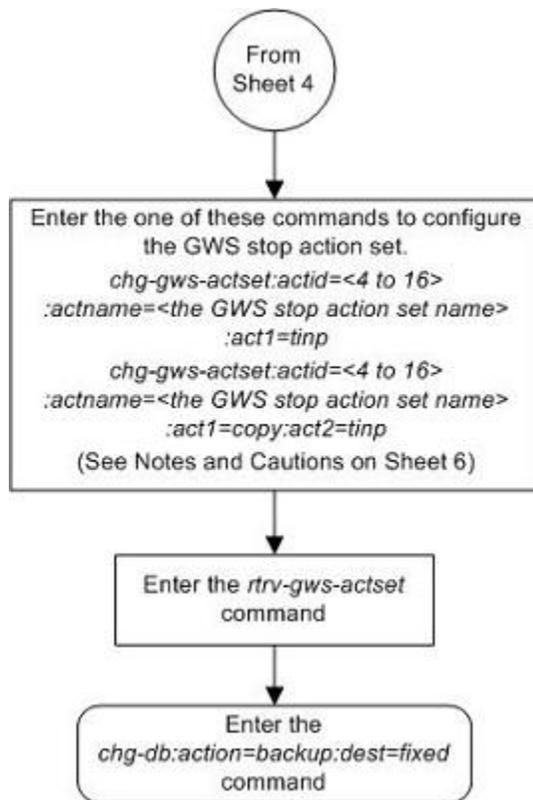

Notes:

1. The *force=yes* parameter must be specified with the *chg-gws-actset* command if an existing GWS stop action set is being changed.
2. The *force=yes* parameter can be specified with the *chg-gws-actset* command if a new GWS stop action set is being created, but is not necessary.
3. The CNCF feature must be on to specify the CNCF GWS stop action.
4. The *actname* parameter must be specified for a new GWS stop action set.
5. The *actname* parameter is not required, but can be specified, if an existing stop action set is being changed.
6. If the *actname* parameter value is different from what is shown in the *rtv-gws-actset* output for the GWS stop action set being changed, the name of the GWS stop action set will be changed to the new *actname* parameter value (see Caution 1).
7. The TINP feature must be enabled to specify the TINP GWS stop action.

Cautions:

1. Changing the name of an existing GWS stop action set will prevent the actions defined in the GWS stop action set from being used to process the MSUs that pass gateway screening. If the name of the GWS stop action set is changed, enter the gateway screening retrieve commands (*rtv-scrset*, *rtv-scr-opc*, *rtv-scr-blkopc*, *rtv-scr-sio*, *rtv-scr-dpc*, *rtv-scr-blkdpc*, *rtv-scr-destfld*, *rtv-scr-isup*, *rtv-scr-cgpa*, *rtv-scr-tt*, *rtv-scr-cdpa*, and *rtv-scr-aftpc*) with the *actname* parameter and the old GWS stop action set name to identify the screens that need to be changed to use the new GWS stop action set name. To change these screens, perform the appropriate procedures in Chapters 3 through 15 in this manual.
2. Caution must be used when changing the stop actions in existing gateway screening stop action sets because these gateway screening stop action sets may be used by one or more gateway screening rules. Changes in the existing gateway screening stop action sets will change how MSUs that pass gateway screening are processed.
3. Caution must be used when specifying the RDCT stop action in an existing GWS stop action set. Specifying the RDCT stop action for Allowed OPC screens containing the adjacent point code of a linkset, for Allowed SIO screens containing the service indicator values 1 (SI=1) or 2 (SI=2), or for Allowed DPC screens containing the Eagle's point code can cause signaling link failures.
To verify whether or not the GWS stop action set name used in this procedure is referenced by these screens, enter the *rtv-scr-opc*, *rtv-scr-sio*, or *rtv-scr-dpc* commands, with the *actname* parameter and the GWS stop action set name used in this procedure.

Configuring TLNP Gateway Screening Stop Action Sets

This procedure is used to add a gateway screening stop action set containing the TLNP gateway screening stop action to the database using the **chg-gws-actset** command.

The gateway screening stop action sets define the actions that are performed on the MSU when the gateway screening process has stopped.

The database can contain a maximum of 16 gateway screening stop action sets, with each set containing a maximum of 10 gateway screening stop actions. For this procedure only two gateway screening stop actions can be used.

- COPY – copy the MSU for the STPLAN feature
- TLNP – ISUP IAMs that pass gateway screening are processed either by the ISUP NP with EPAP feature (if the ISUP NP with EPAP feature is enabled and turned on) or by the Triggerless LNP feature (if the LNP feature is enabled and the Triggerless LNP feature is turned on). The ISUP NP with EPAP feature is discussed in more detail in the *Feature Manual - G-Port*. The Triggerless LNP feature is discussed in more detail in the *LNP Feature Activation Guide*.

The status of the ISUP NP with EPAP feature can be verified with the **rtrv-ctrl-feat** command. The ISUP NP with EPAP feature also requires that the G-Port feature is enabled and that the Gateway Screening feature is turned on. The status of the G-Port feature can be verified with the **rtrv-ctrl-feat** command. The status of the Gateway Screening feature can be verified with the **rtrv-feat** command. Enabling the G-Port feature is discussed in more detail in the *Feature Manual - G-PORT*.



CAUTION: When Gateway Screening is in the screen test mode, as defined by the linkset parameters `gwsa=off` and `gwsn=on`, any action in the gateway screening stop action sets created in this procedure will be performed.

The **chg-gws-actset** command in this procedure uses these parameters.

:actid – The ID number of the gateway screening stop action set. The value of this parameter is from 4 to 16.

:actname – The name of the gateway screening stop action set consisting of 1 alphabetic character followed by up to 5 alphanumeric characters. The word **none** cannot be used for the **actname** parameter.

:force – The **force=yes** parameter must be specified when changing the gateway screening stop actions of an existing gateway screening stop action set.

:act1 and **:act2** – Only two gateway screening stop action sets can be defined with the TLNP gateway screening stop action:

- One set with only the TLNP gateway Screening stop action (defined with the **act1=tlnp** parameter).
- Another set with the COPY and TLNP gateway screening stop action (defined by the **act1=copy** and **act2=tlnp** parameters).

The value of the **actname** parameter must be unique. The value of this parameter is used by the **actname** parameter in the gateway screening commands and is shown in the **NSR/ACT** field of the outputs of the retrieve gateway screening commands to define the action that is performed on the MSU that passes gateway screening.

When a gateway screening stop action set is being entered into the database for the first time, the name of the gateway screening stop action set (**actname**) must be added to the database before any gateway screening stop actions are assigned to the gateway screening stop action set.

The **tlnp** gateway screening stop action cannot be specified with either the **cncf** (calling name conversion facility) or **rdct** (redirect) gateway screening actions in the same gateway screening action set.

Table 2-12. Sample TLNP Gateway Screening Stop Action Set Configuration

ACTID	ACTNAME	ACT1	ACT2	ACT3
4	TLNP	tlnp	—	—
5	CPNP	copy	tlnp	—

Procedure

1. Verify that the gateway screening feature is turned on, by entering the **rtrv-feat** command.

If the gateway screening feature is turned on, the **GWS** field should be set to **on**. In this example, the gateway screening feature is off.

NOTE: The `rtrv-feat` command output contains other fields that are not used by this procedure. If you wish to see all the fields displayed by the `rtrv-feat` command, see the `rtrv-feat` command description in the *Commands Manual*.

If the gateway screening feature is turned on, go to step 3.

2. If the gateway screening feature is not turned on, shown by the **GWS = off** entry in the **rtrv-feat** command output in step 1, turn it on by entering this command.

chg-feat:gws=on

NOTE: Once the gateway screening feature is turned on with the chg-feat command, it cannot be turned off.

When this command has successfully completed, this message should appear.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
CHG-FEAT: MASP A - COMPLTD
```

3. Display the gateway screening stop action sets in the database with the **rtrv-gws-actset** command.

Action IDs 1, 2, and 3 are predefined and cannot be changed. Action ID 1 contains only the COPY stop action. Action ID 2 contains either the RDCT or CNCF stop action. Action ID 3 contains the COPY and either the RDCT or CNCF stop actions as shown in the following output examples.

```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
ACT ACT
ID NAME 1 2 3 4 5 6 7 8 9 10
--
1 copy copy
2 cncf cncf
3 cpncf copy cncf
GWS action set table is (3 of 16) 19% full
```

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
ACT ACT
ID NAME 1 2 3 4 5 6 7 8 9 10
--
1 copy copy
2 rdct rdct
3 cr copy rdct
GWS action set table is (3 of 16) 19% full
```

If the **rtrv-gws-actset** output shows that these gateway screening stop action sets: one with **ACT1=tlnp** and the other with **ACT1=copy** and **ACT2=tlnp**, this procedure cannot be performed.

If only one of these gateway screening stop action sets are shown, skip steps 4 through 11, and go to step 12.

If neither of these gateway screening stop action sets are shown, go to step 4.

4. Verify whether or not the LNP or ISUP NP with EPAP features are enabled, using the **rtrv-ctrl-feat** command.

If the LNP feature is enabled, the **LNP TNS** field with a telephone number quantity greater than zero is shown in the **rtrv-ctrl-feat** output. If the ISUP NP with EPAP feature is enabled, the **ISUP NP with EPAP** field is shown in the **rtrv-ctrl-feat** output.

This is an example of the possible output.

```
rlghncxa03w 06-10-30 21:15:37 GMT EAGLE5 36.0.0
The following features have been permanently enabled:

Feature Name          Partnum    Status    Quantity
Command Class Management 893005801 off      ----
Intermed GTT Load Sharing 893006901 off      ----
```

Database Administration Manual - Gateway ScreeningConfiguring TLNP Gateway Screening Stop Action Sets

XGTT Table Expansion	893006101	off	----
XMAP Table Expansion	893007710	on	3000
Large System # Links	893005910	on	2000
Routesets	893006401	on	6000
GSM MAP SRI Redirect	893014001	on	----
ISUP NP with EPAP	893013801	on	----
HC-MIM SLK Capacity	893012707	on	64

The following features have been temporarily enabled:

Feature Name	Partnum	Status	Quantity	Trial Period Left
Zero entries found.				

The following features have expired temporary keys:

Feature Name	Partnum
Zero entries found.	

If the ISUP NP with EPAP feature is enabled, skip steps 5 through 10, and go to step 11.

If the LNP feature is enabled, perform the “Configuring the Triggerless LNP Feature” procedure in the *LNP Feature Activation Guide*.

If neither the ISUP NP with EPAP or the LNP features are enabled, perform the “Configuring the Triggerless LNP Feature” procedure in the *LNP Feature Activation Guide* to use the **tlnp** gateway screening stop action for the Triggerless LNP feature.

To use the **tlnp** gateway screening stop action for the ISUP NP with EPAP feature, and neither the ISUP NP with EPAP or the LNP features are enabled, verify that the G-Port feature is enabled. If the G-Port feature is enabled, the entry **GPORT** is shown in the **rtrv-ctrl-feat** output. If the G-Port feature is not enabled, go to the *Feature Manual - G-Port* and enable the G-Port feature. Then go to step 5.

If the G-Port feature is enabled, go to step 5.

NOTE: If the **rtrv-ctrl-feat output in step 4 shows any controlled features, skip steps 5, 6, 7, and 8, and go to step 9.**

NOTE: If the **rtrv-ctrl-feat output shows only the HC-MIM SLK Capacity feature with a quantity of 64, then no other features are enabled. Steps 5, 6, 7, and 8 must be performed.**

5. Display the serial number in the database with the **rtrv-serial-num** command.

This is an example of the possible output.

```
rlghncxa03w 06-10-30 21:15:37 GMT EAGLE5 36.0.0
System serial number = ntxxxxxxxxxxxxxx
```

```
System serial number is not locked.
```

```
rlghncxa03w 06-10-30 21:15:37 GMT EAGLE5 36.0.0
Command Completed
```

NOTE: If the serial number is locked, skip step 6 and go to step 7.

NOTE: If the serial number is correct and locked, skip steps 6, 7, and 8, and go to step 9. If the serial number is correct but not locked, skip steps 6 and 7, and go to step 8. If the serial number is not correct, but is locked, the ISUP NP with EPAP feature cannot be enabled and the remainder of this procedure cannot be performed. Contact the Customer Care Center to get an incorrect and locked serial number changed. Refer to [Customer Care Center](#) for the contact information. The serial number can be found on a label affixed to the control shelf (shelf 1100).

6. Enter the correct serial number into the database using the **ent-serial-num** command with the **serial** parameter.

For this example, enter this command.

```
ent-serial-num:serial=<EAGLE 5 ISS's correct serial number>
```

When this command has successfully completed, the following message should appear.

```
rlghncxa03w 06-10-28 21:15:37 GMT EAGLE5 36.0.0
ENT-SERIAL-NUM: MASP A - COMPLTD
```

7. Verify that the serial number entered into step 6 was entered correctly using the **rtrv-serial-num** command.

This is an example of the possible output.

```
rlghncxa03w 06-10-28 21:15:37 GMT EAGLE5 36.0.0
System serial number = nt00001231

System serial number is not locked.
rlghncxa03w 06-10-28 21:15:37 GMT EAGLE5 36.0.0
Command Completed
```

If the serial number was not entered correctly, repeat steps 6 and 7 and re-enter the correct serial number.

8. Lock the serial number in the database by entering the **ent-serial-num** command with the serial number shown in step 5, if the serial number shown in step 5 is correct, or with the serial number shown in step 7, if the serial number was changed in step 6, and with the **lock=yes** parameter.

For this example, enter this command.

```
ent-serial-num:serial=<EAGLE 5 ISS's serial number>:lock=yes
```

When this command has successfully completed, the following message should appear.

```
rlghncxa03w 06-10-28 21:15:37 GMT EAGLE5 36.0.0
ENT-SERIAL-NUM: MASP A - COMPLTD
```

9. Enable the ISUP NP with EPAP feature by entering the **enable-ctrl-feat** command.

For this example, enter this command.

```
enable-ctrl-feat:partnum=893013801:fak=<feature access key>
```

NOTE: The values for the feature access key (the fak parameter) are provided by Tekelec. If you do not have the controlled feature part number or the feature access key for the feature you wish to enable, contact your Tekelec Sales Representative or Account Representative.

When the **enable-ctrl-feat** command has successfully completed, this message should appear.

```
rlghncxa03w 06-10-30 21:15:37 GMT EAGLE5 36.0.0
ENABLE-CTRL-FEAT: MASP B - COMPLTD
```

10. Verify the changes by entering the **rtrv-ctrl-feat** command with the part number specified in step 9.

```
rtrv-ctrl-feat:partnum=893013801
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-30 21:16:37 GMT EAGLE5 36.0.0
The following features have been permanently enabled:

Feature Name          Partnum    Status    Quantity
ISUP NP with EPAP    893013801  off      ----
```

NOTE: If the TLNP feature is on, shown in the `rtrv-feat` output in step 1, skip this step and step 12, and go to step 13.

11. Turn the TLNP feature on by entering this command.

```
chg-feat:tlnp=on
```

NOTE: Once the TLNP feature is turned on with the `chg-feat` command, it cannot be turned off.

When this command has successfully completed, this message should appear.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
CHG-FEAT: MASP A - COMPLTD
```

12. Add the TLNP gateway screening stop action to the database by using the `chg-gws-actset` command.

For this example, enter these commands based on the sample configuration shown in [Table 2-12](#) .

```
chg-gws-actset:actid=4:actname=tlnp:act1=tlnp
```

```
chg-gws-actset:actid=5:actname=cpnp:act1=copy:act2=tlnp
```

If an existing gateway screening stop action set is being changed, the `force=yes` parameter must be specified with the `chg-gws-actset` command.

The `force=yes` parameter can be specified with the `chg-gws-actset` command if a new GWS stop action set is being created, but is not necessary.

The `actname` parameter must be specified for a new GWS stop action set.

The `actname` parameter is not required, but can be specified, if an existing stop action set is being changed.

If the `actname` parameter value is different from what is shown in the `rtrv-gws-actset` output for the GWS stop action set being changed, the name of the GWS stop action set will be changed to the new `actname` parameter value (see the first Caution).



CAUTION: Changing the name of an existing GWS stop action set will prevent the actions defined in the GWS stop action set from being used to process the MSUs that pass gateway screening. If the name of the GWS stop action set is changed, enter the gateway screening retrieve commands (`rtrv-scrset`, `rtrv-scr-opc`, `rtrv-scr-blkopc`, `rtrv-scr-sio`, `rtrv-scr-dpc`, `rtrv-scr-blkdpc`, `rtrv-scr-destfld`, `rtrv-scr-isup`, `rtrv-scr-cgpa`, `rtrv-scr-tt`, `rtrv-scr-cdpa`, and `rtrv-scr-aftpc`) with the `actname` parameter and the old GWS stop action set name to identify the screens that need to be changed to use the new GWS stop action set name. To change these screens, perform the appropriate procedures in Chapters [Chapter 3 Allowed Affected Point Code \(AFTPC\) Screen Configuration](#) through [Chapter 15 Allowed ISUP Message Type Screen Configuration](#) in this manual.



CAUTION: Caution must be used when changing the stop actions in existing gateway screening stop action sets because these gateway screening stop action sets may be used by one or more gateway screening rules. Changes in the existing gateway screening stop action sets will change how MSUs that pass gateway screening are processed.

When each of these commands have successfully completed, this message should appear.

```
rlghncxa03w 06-10-25 15:30:30 GMT EAGLE5 36.0.0
CAUTION: GWS action set may be referenced by one or more GWS rules
CHG-GWS-ACTSET: MASP A - COMPLTD
```

13. Verify the changes using the **rtrv-gws-actset** command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:31:30 GMT EAGLE5 36.0.0
ACT ACT
ID NAME 1 2 3 4 5 6 7 8 9 10
-----
1 copy copy
2 rdct rdct
3 cr copy rdct
4 tlnp tlnp
5 cpnp copy tlnp


GWS action set table is (5 of 16) 31% full
```


14. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.


These messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.


```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 2-4. Configuring TLNP Gateway Screening Stop Action Sets

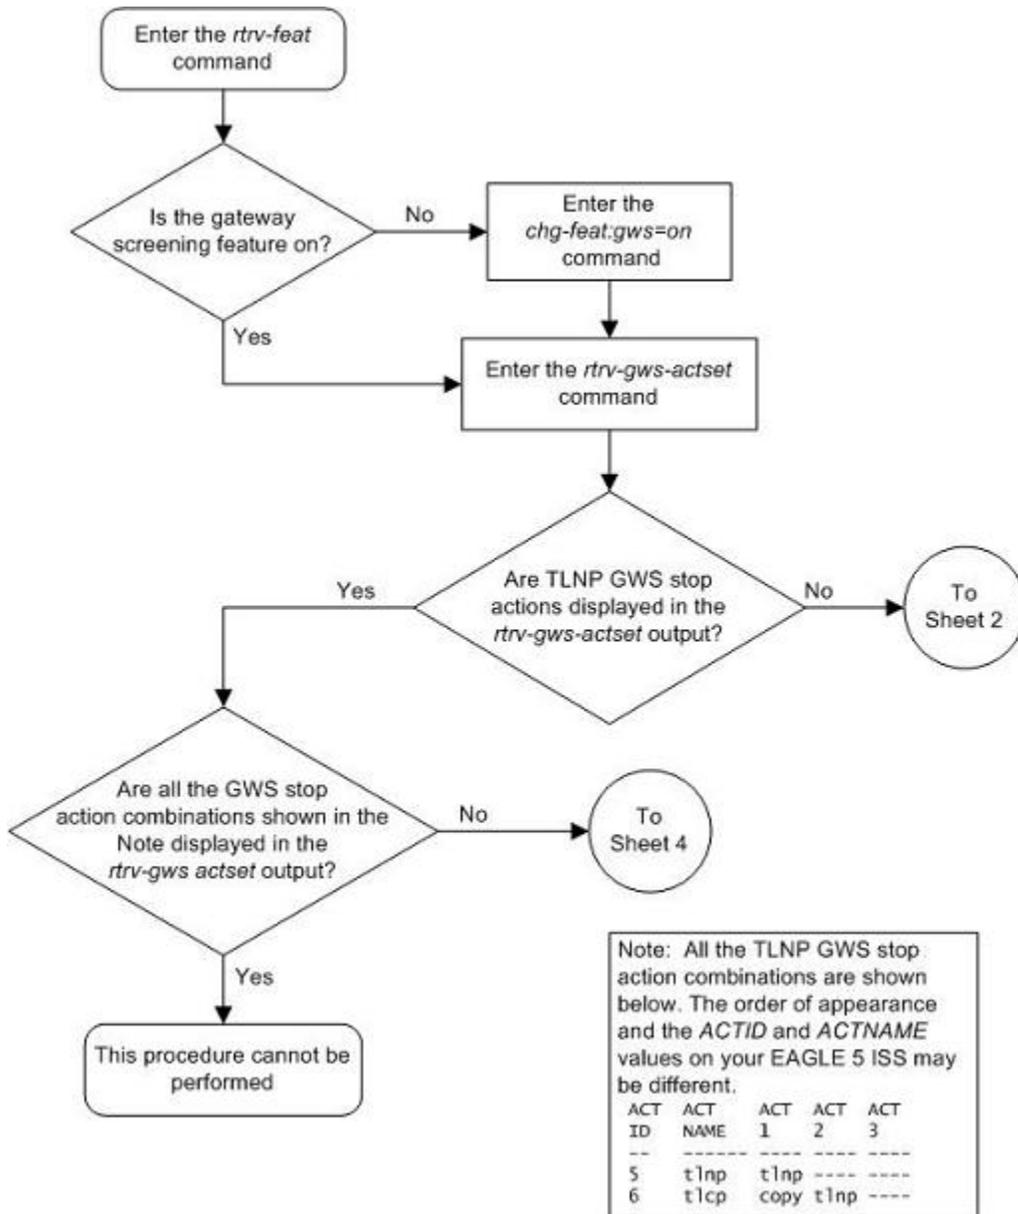

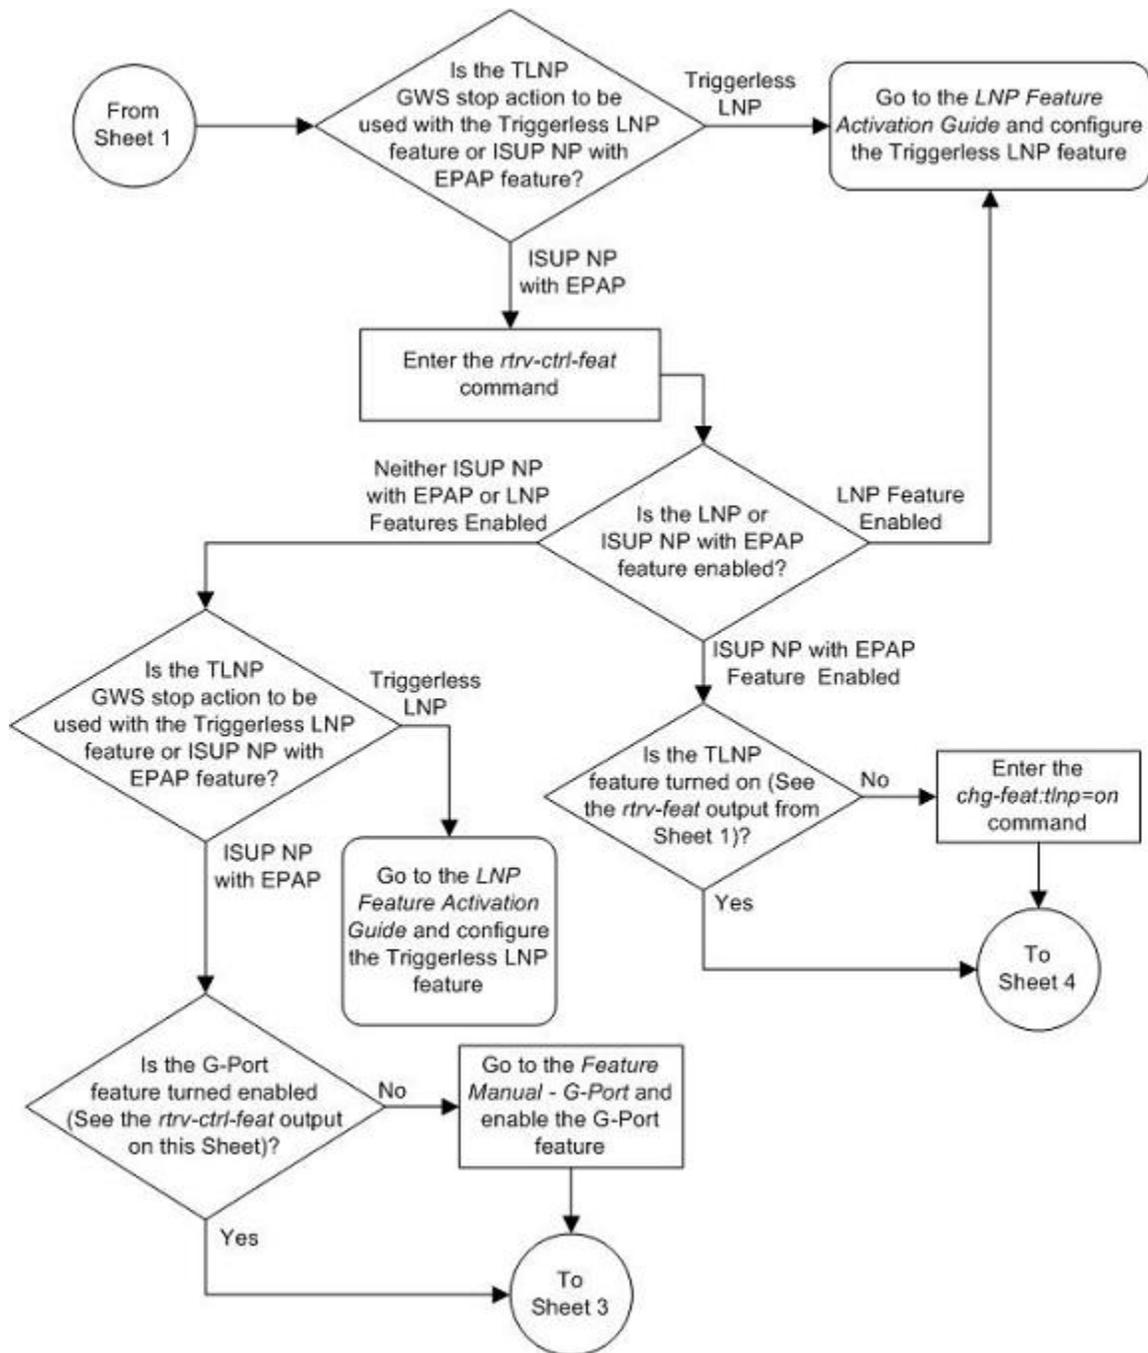

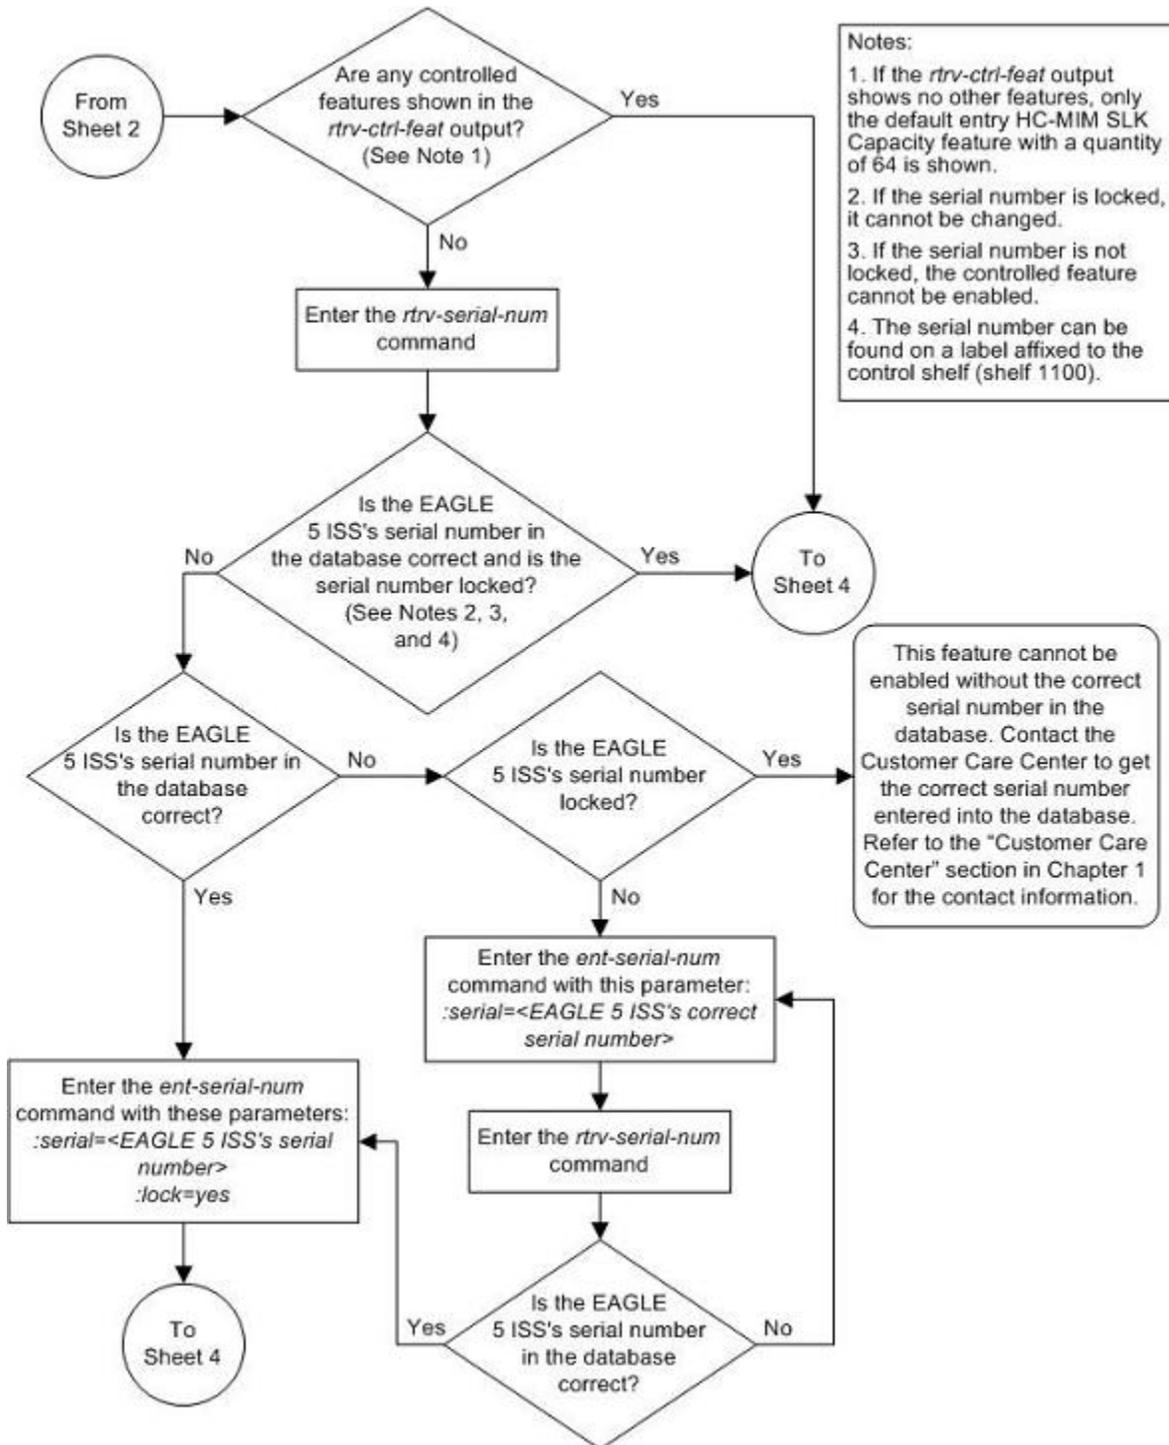

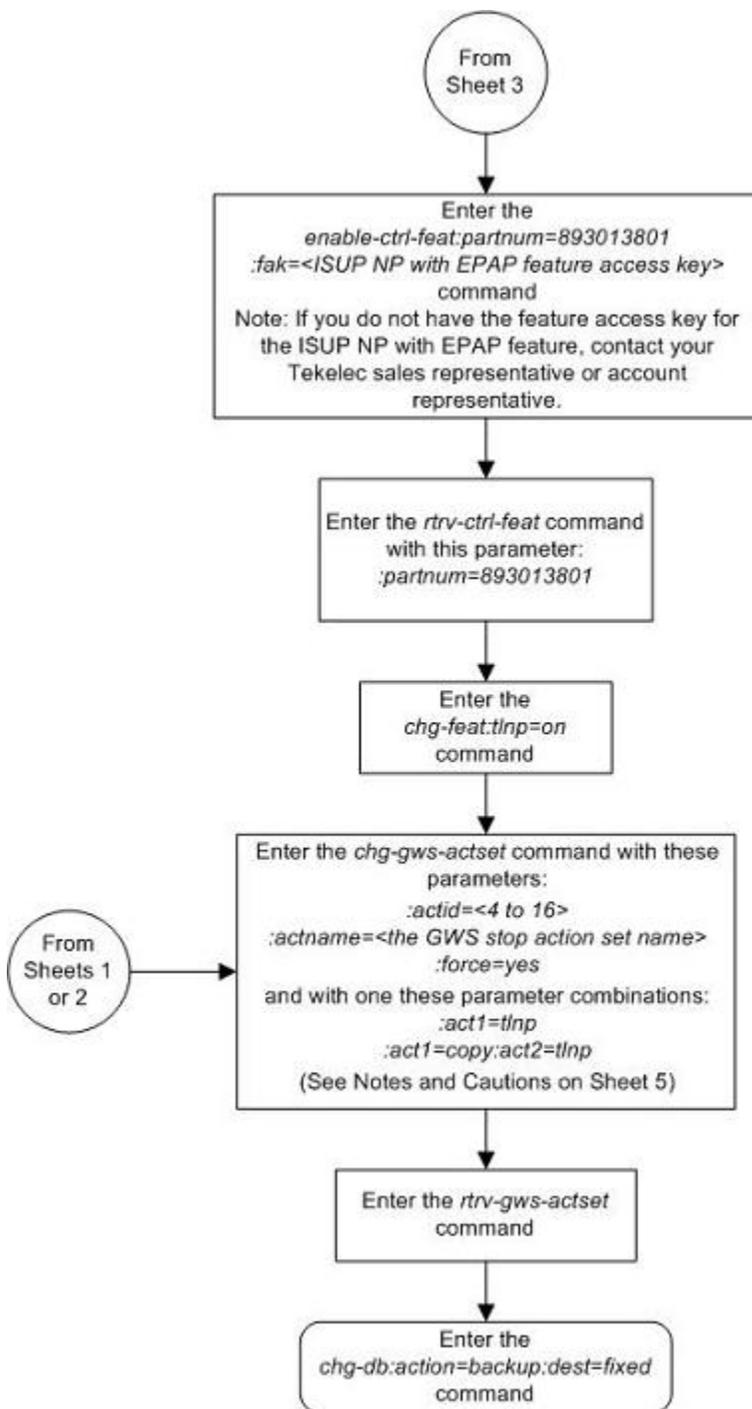

Notes:

1. The *force=yes* parameter must be specified with the *chg-gws-actset* command if an existing GWS stop action set is being changed.
2. The *force=yes* parameter can be specified with the *chg-gws-actset* command if a new GWS stop action set is being created, but is not necessary.
3. The TLNP GWS stop action cannot be in the same GWS stop action set with either the CNCF or RDCT GWS stop actions.
4. The *actname* parameter must be specified for a new GWS stop action set.
5. The *actname* parameter is not required, but can be specified, if an existing stop action set is being changed.
6. If the *actname* parameter value is different from what is shown in the *rtrv-gws-actset* output for the GWS stop action set being changed, the name of the GWS stop action set will be changed to the new *actname* parameter value (see Caution 1).

Cautions:

1. Changing the name of an existing GWS stop action set will prevent the actions defined in the GWS stop action set from being used to process the MSUs that pass gateway screening. If the name of the GWS stop action set is changed, enter the gateway screening retrieve commands (*rtrv-scrset*, *rtrv-scr-opc*, *rtrv-scr-blkopc*, *rtrv-scr-sio*, *rtrv-scr-dpc*, *rtrv-scr-blkdpc*, *rtrv-scr-destfid*, *rtrv-scr-isup*, *rtrv-scr-cgpa*, *rtrv-scr-itt*, *rtrv-scr-cdpa*, and *rtrv-scr-aftpc*) with the *actname* parameter and the old GWS stop action set name to identify the screens that need to be changed to use the new GWS stop action set name. To change these screens, perform the appropriate procedures in Chapters 3 through 15 in this manual.
2. Caution must be used when changing the stop actions in existing gateway screening stop action sets because these gateway screening stop action sets may be used by one or more gateway screening rules. Changes in the existing gateway screening stop action sets will change how MSUs that pass gateway screening are processed.

Removing Gateway Screening Stop Action Sets

This procedure is used to remove a gateway screening stop action set from the database or a gateway screening stop action from a gateway screening stop action set from the database using the **chg-gws-actset** command.

The database can contain a maximum of 16 gateway screening stop action sets, with each set containing a maximum of 10 gateway screening stop actions. Five gateway screening stop actions have been defined.

The **chg-gws-actset** command uses these parameters in this procedure.

:actid – The ID number of the gateway screening stop action set. The value of this parameter is from 4 to 16.

:force – The **force=yes** parameter must be specified when changing the gateway screening stop actions of an existing gateway screening stop action set.

:all=none – Sets the value of each gateway screening stop action in the gateway screening stop action set to **none**.

:act1 to **:act10** – One of ten gateway screening stop actions being removed from the gateway screening stop action set.

The first three gateway screening stop action sets (**actid=1**, **actid=2**, and **actid=3**) cannot be changed or removed.

No other optional parameters can be specified **all=none** parameter.

The **force=yes** parameter must be specified when changing an existing gateway screening stop action set.

Procedure

1. Display the gateway screening stop action sets in the database with the **rtrv-gws-actset** command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
ACT ACT
ID NAME 1 2 3 4 5 6 7 8 9 10
--
1 copy copy
2 rdct rdct
3 cr copy rdct
4 cncf cncf
5 cpnf copy cncf
6 cfrd copy cncf rdct
7 cnrd cncf rdct
8 tlnp tlnp
9 tlcp copy tlnp
```

GWS action set table is (9 of 16) 56% full

2. Either remove a gateway screening stop action set from the database or remove a gateway screening stop action from a gateway screening stop action set from the database by entering the **chg-gws-actset** command.

If you wish to remove the gateway screening stop actions from an existing gateway screening stop action set (stop action sets 4 through 16), enter the **chg-gws-actset** command with the **all=none**, **actid**, and **force=yes** parameters, as shown in this command example.

chg-gws-actset:actid=4:all=none:force=yes

If you wish to remove individual gateway screening stop actions from an existing gateway screening stop action set (stop action sets 4 through 16), enter the **chg-gws-actset** command with the stop action parameter (**act1** through **act10**) value equal to none and the **force=yes** parameter, as shown in this command example.

chg-gws-actset:actid=5:act2=none:force=yes



CAUTION: Caution must be used when changing the stop actions in existing gateway screening stop action sets because these gateway screening stop action sets may be used by one or more gateway screening rules. Changes in the existing gateway screening stop action sets will change how MSUs that pass gateway screening are processed.

When each of these commands have successfully completed, this message should appear.

```
rlghncxa03w 06-10-25 15:30:30 GMT EAGLE5 36.0.0
CAUTION: GWS action set may be referenced by one or more GWS rules
CHG-GWS-ACTSET: MASP A - COMPLTD
```

3. Verify the changes using the **rtrv-gws-actset** command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:31:30 GMT EAGLE5 36.0.0
ACT ACT
ID NAME 1 2 3 4 5 6 7 8 9 10
--
1 copy copy
2 rdct rdct
3 cr copy rdct
4 ---- ----
5 cpncf copy
6 cncfrd cncf rdct
```

```

7  cpcf rd copy cnf rdct
8  tlnp tlnp
9  cpnp copy tlnp

GWS action set table is (8 of 16) 50% full
    
```


- Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

These messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```

BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
    
```

Flowchart 2-5. Removing Gateway Screening Stop Action Sets

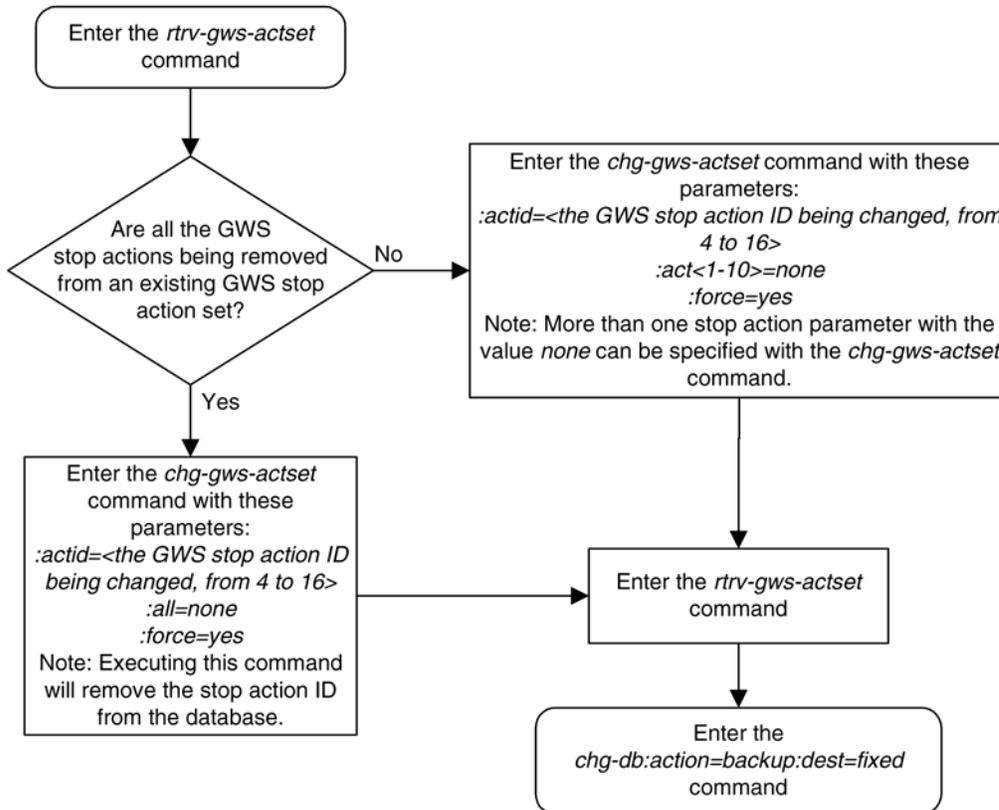

Setting the Threshold for Reporting Gateway Screening Activity

This procedure is used to set the threshold for reporting these gateway screening activities using the **set-gtwy-actthresh** command.

- The threshold for MSUs received on a gateway link set.
- The threshold for MSUs rejected on a gateway link set because of screening.

Setting the Threshold for Reporting Gateway Screening Database Administration Manual - Gateway Screening Activity

These thresholds are set on a linkset basis. These gateway screening activities are reported only if the threshold is set and only if the threshold is reached.

The **set-gtwy-acthresh** command uses these parameters.

:intrvl – The examination period, in minutes, during which the gateway screening activity thresholds are to be tested.

:lsn – The name of the linkset that the thresholds are assigned to.

:recv – The threshold for MSUs received on the gateway link set.

:rej – The threshold for MSUs rejected on the gateway link set because of screening.

Canceling the RTRV-LS Command

Because the **rtrv-ls** command used in this procedure can output information for a long period of time, the **rtrv-ls** command can be canceled and the output to the terminal stopped. There are three ways that the **rtrv-ls** command can be canceled.

- Press the **F9** function key on the keyboard at the terminal where the **rtrv-ls** command was entered.
- Enter the **canc-cmd** without the **trm** parameter at the terminal where the **rtrv-ls** command was entered.
- Enter the **canc-cmd:trm=<xx>**, where **<xx>** is the terminal where the **rtrv-ls** command was entered, from another terminal other than the terminal where the **rtrv-ls** command was entered. To enter the **canc-cmd:trm=<xx>** command, the terminal must allow Security Administration commands to be entered from it and the user must be allowed to enter Security Administration commands. The terminal's permissions can be verified with the **rtrv-secu-trm** command. The user's permissions can be verified with the **rtrv-user** or **rtrv-secu-user** commands.

For more information about the **canc-cmd** command, go to the *Commands Manual*.

Procedure

1. Display the gateway screening thresholds in the database using the **rtrv-gtwy-acthresh** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
LSN      REJ      RECV     INTRVL
WY644368 10       1000    10
WY234456 25       2000    20
LN123556 25       2500    30
OP239900 -        5       5
```

2. Display the current linkset configuration using the **rtrv-ls** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
LSN      APCA  (SS7)  SCRN  SET  SET  BEI  LST  LNKS  ACT  MES  DIS  SLSCI  NIS
lsa1     240-020-000  ss01  1  1  yes  A  1  off  off  off  no  off
lsa2     240-030-000  ss02  1  2  no   C  3  on  on  on  yes  off
lsa3     240-040-000  ss03  1  3  yes  C  5  off  off  off  yes  off
ln123556 240-050-000  ss01  1  8  yes  C  5  on  on  on  yes  off
op239900 240-060-000  ss01  1  7  yes  C  5  on  on  on  yes  off
wy234456 240-070-000  ss01  1  6  yes  C  5  on  on  on  yes  off
wy644368 240-080-000  ss01  1  5  yes  C  5  on  on  on  yes  off

L3T  SLT                                GWS  GWS  GWS
```

LSN	APCA (X25)	SCRN	SET	SET	BEI	LST	LNKS	ACT	MES	DIS	SLSCI	NIS
ls6	244-010-004	ss04	1	4	no	A	6	off	off	off	---	off
ls7	244-012-005	ss07	1	5	no	C	3	on	on	on	---	off
ls8	244-012-006	ss09	1	6	no	C	8	off	off	off	---	off

LSN	APCI (SS7)	SCRN	SET	SET	BEI	LST	LNKS	ACT	MES	DIS	SLSCI	NIS
lsi1	1-111-1	ss01	1	1	yes	A	1	off	off	off	---	---
lsi2	1-111-2	ss02	1	2	no	C	3	on	on	on	---	---
lsi3	1-111-3	ss03	1	3	yes	C	5	off	off	off	---	---

LSN	APCN (SS7)	SCRN	SET	SET	BEI	LST	LNKS	ACT	MES	DIS	SLSCI	NIS
lsn1	11111	ss01	1	1	yes	A	1	off	off	off	---	off
lsn2	11112	ss02	1	2	no	C	3	on	on	on	---	off
lsn3	11113	ss03	1	3	yes	C	5	off	off	off	---	off

Link set table is (12 of 1024) 1% full

- Set the gateway screening thresholds for a linkset using the **set-gtwy-acthresh** command.

For this example, enter this command.

```
set-gtwy-acthresh:lsn=lsa2:intrvl=20:rej=30:rcv=2500
```

When this command has successfully completed, a message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:29:30 GMT EAGLE5 36.0.0
SET-GTWY-TRHSHLD: MASP A - COMPLTD
```

- Verify the changes using the **rtrv-gtwy-acthresh** command with the linkset name specified in step 3.

For this example, enter this command.

```
rtrv-gtwy-acthresh:lsn=lsa2
```

The following is an example of the possible output.


```
rlghncxa03w 06-10-25 15:30:30 GMT EAGLE5 36.0.0
LSN      REJ      RECV     INTRVL
LSA2     30       2500     20
```

- Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 2-6. Setting the Threshold for Reporting Gateway Screening Activity

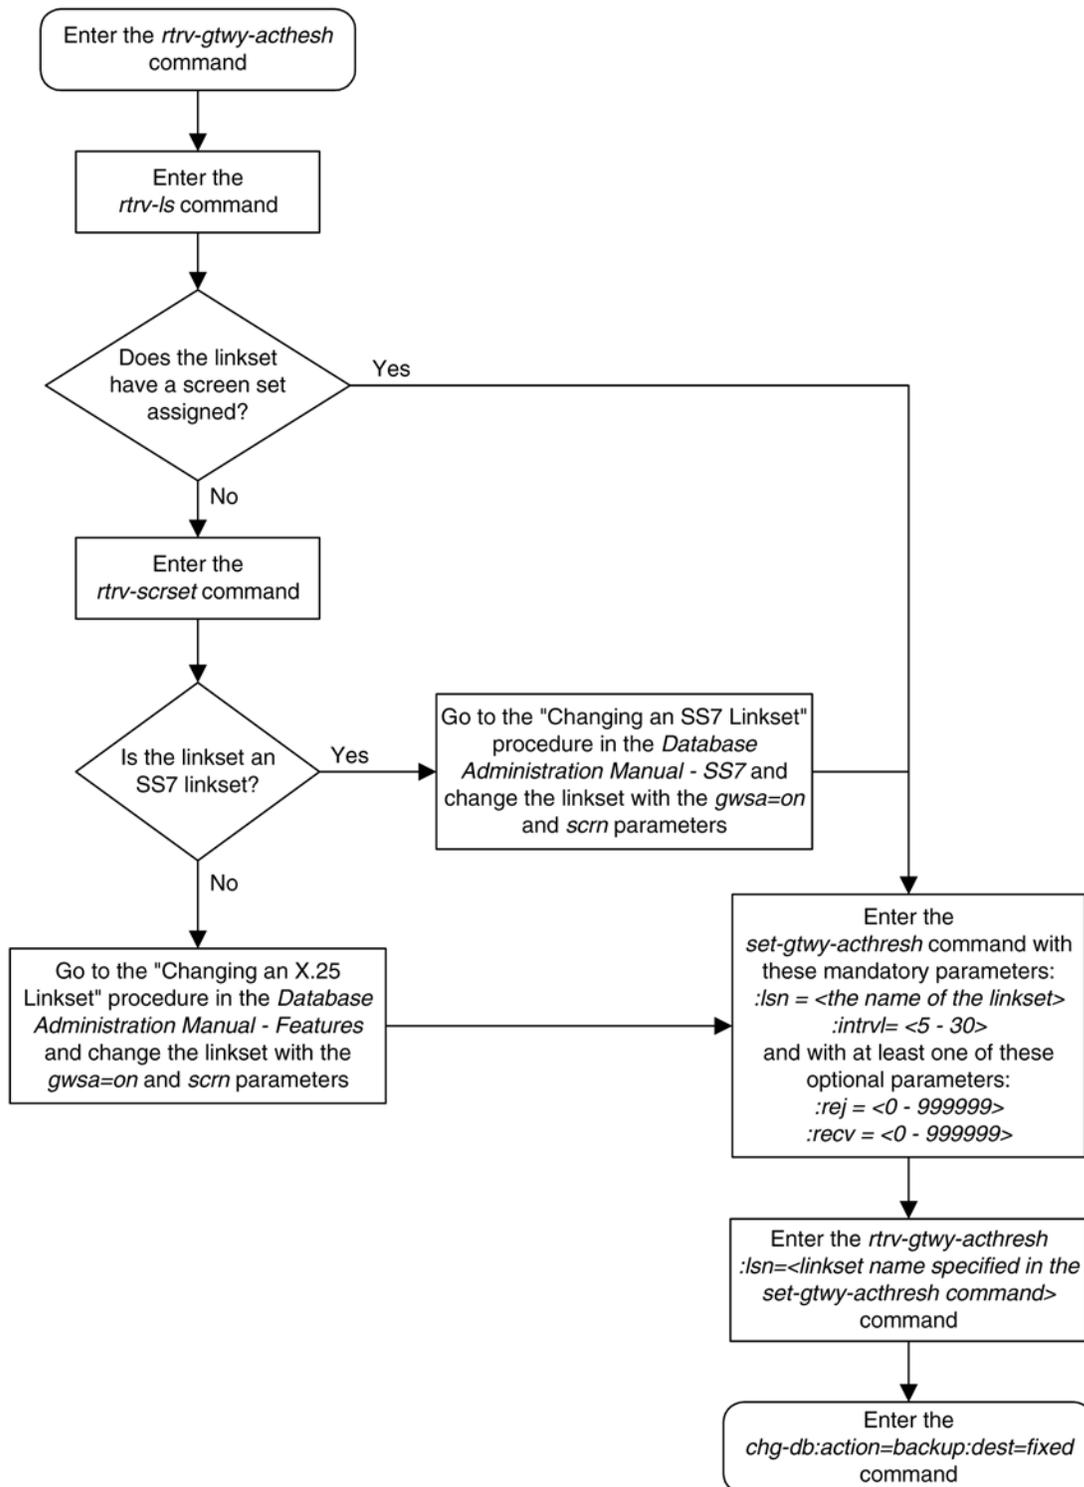

Setting the Maximum Number of Gateway Screening Rejected Messages

When an MSU is rejected because of gateway screening, a UIM is sent to the terminal alerting the user that the MSU has been rejected. The EAGLE 5 ISS allows the user to configure the maximum number of these UIMs that can be sent to the terminal for a specified time period. This procedure is used to configure the maximum number of UIMs sent to the terminal and the time period using the **set-scrrej-prmtrs** command.

The **set-scrrej-prmtrs** command uses these parameters.

:limit – the number of UIMs to be sent to the EAGLE 5 ISS terminals during the time period specified by the **intrvl** parameter. The values for this parameter range from 0 to 9999.

:intrvl – the amount of time, in minutes, that the maximum number of UIMs, defined by the **limit** parameter, can be sent to the EAGLE 5 ISS terminals.

The examples in this procedure are used to set the number of UIMs to 500 and the time period to 20 minutes.

Procedure

1. Display the current gateway screening rejected UIM limit in the database using the **rtrv-gtwy-prmtrs** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
LIMIT INTRVL
1000 15
```

2. Set the gateway screening rejected UIM limit using the **set-scrrej-prmtrs** command.

For this example, enter this command.

```
set-scrrej-prmtrs:limit=500:intrvl=20
```

When this command has successfully completed, a message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
SET-SCRREJ-PRMTRS: MASP A - COMPLTD
```

3. Verify the changes using the **rtrv-gtwy-prmtrs** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
LIMIT INTRVL
500 20
```


4. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Setting the Maximum Number of Gateway Screening Database Administration Manual - Gateway Screening Rejected Messages

Flowchart 2-7. Setting the Maximum Number of Gateway Screening Rejected Messages

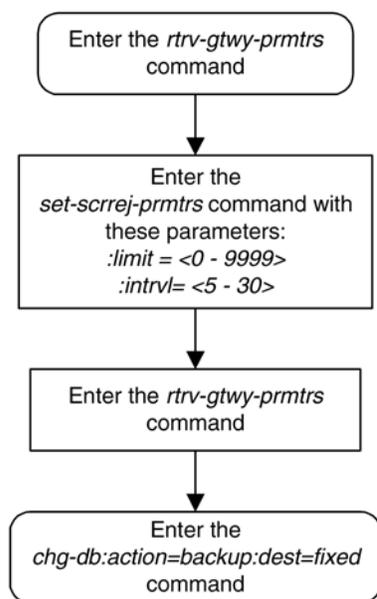

Allowed Affected Point Code (AFTPC) Screen Configuration

Introduction	3-1
Adding an Allowed Affected Point Code Screen	3-3
Removing an Allowed Affected Point Code Screen	3-11
Changing an Allowed Affected Point Code Screen	3-15

Introduction

The allowed affected point code (AFTPC) screen is used to identify affected point codes. Messages containing the allowed affected point code in the AFTPC screen are allowed into the EAGLE 5 ISS for further processing. The gray shaded areas in [Figure 3-1](#) shows the fields of the SS7 message that are checked by the AFTPC screening function.

Affected point codes are found in subsystem-prohibited (SSP), subsystem-status-test (SST) and subsystem-allowed (SSA) SCCP management messages. This is the last screen in the gateway screening process. If a match is found, the **nsfi** is equal to **stop**, and the message is processed.

If the **copy** gateway screening stop action is specified, the message is processed and a copy of the message is sent by the STPLAN feature to an external application.

If no match is found, the message is rejected.

[Flowchart 3-8](#) shows the screening action of the allowed AFTPC screen.

Flowchart 3-1. Allowed AFTPC Screening Action

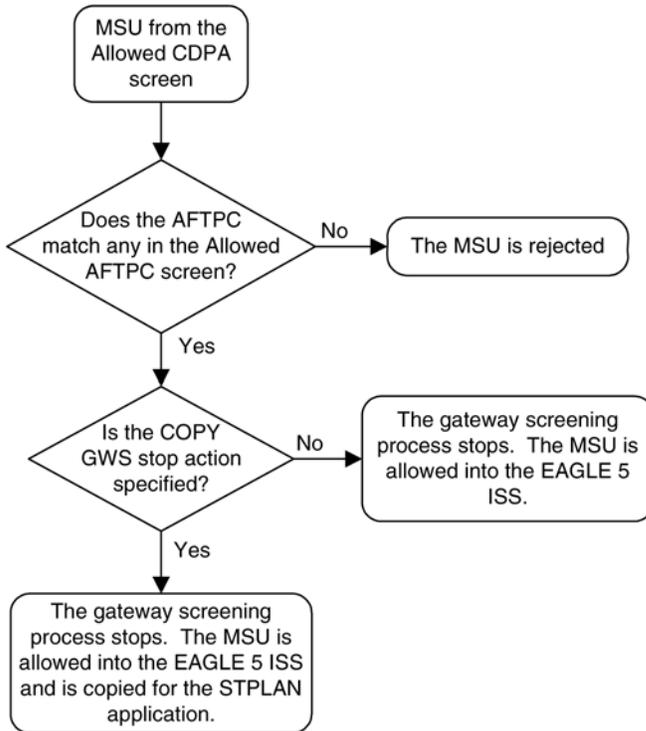


Figure 3-1. Allowed Affected Point Code Screening Function

ANSI MSU (ANSI Message Signal Unit)							
BSN FSN LI	SIO xx xx xxxx NIC PRI SI	SIF					
		DPC NCM NC NI	Routing Label OPC NCM NC NI	SLS xx	CGPA	CDPA	SCMG Data Length Message Type1 (SSA, SSP, SST) Affected Subsystem Affected Point Code (NCM NC NI) Subsystem Multiplicity

ITU-I MSU (ITU International Message Signal Unit)							
BSN FSN LI	SIO xx xx xxxx NIC PRI SI	SIF					
		DPC ID AREA ZONE	Routing Label OPC ID AREA ZONE	SLS xx	CGPA	CDPA	SCMG Data Length Message Type1 (SSA, SSP, SST) Affected Subsystem Affected Point Code (ID AREA ZONE) Subsystem Multiplicity

14-Bit ITU-N MSU (14-Bit ITU National Message Signal Unit)							
BSN FSN LI	SIO xx xx xxxx NIC PRI SI	SIF					
		DPC NPC	Routing Label OPC NPC	SLS xx	CGPA	CDPA	SCMG Data Length Message Type1 (SSA, SSP, SST) Affected Subsystem Affected Point Code (NPC) Subsystem Multiplicity

24-Bit ITU-N MSU (24-Bit ITU National Message Signal Unit)							
BSN FSN LI	SIO xx xx xxxx NIC PRI SI	SIF					
		DPC SP SSA MSA	Routing Label OPC SP SSA MSA	SLS xx	CGPA	CDPA	SCMG Data Length Message Type1 (SSA, SSP, SST) Affected Subsystem Affected Point Code (SP SSA MSA) Subsystem Multiplicity

Adding an Allowed Affected Point Code Screen

This procedure is used to add an allowed affected point code (AFTPC) screen to the database using the **ent-scr-aftpc** command. The parameters used by the **ent-scr-aftpc** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The examples in this procedure are used to add the allowed AFTPC screen data shown in [Table 3-1](#) and based on the example configurations shown in [Figure 2-3](#) and [Figure 2-6](#).

Table 3-1. Example Gateway Screening Allowed AFTPC Configuration Table

Screening Reference	NI	NC	NCM	SSN	NSFI	ACTNAME
gw20	008	008	008	250	stop	COPY
ls04	010	010	010	015	stop	COPY

NOTE: If you using multiple-part ITU national point codes with gateway screening, see the [14-Bit ITU National Point Code Formats](#) section.

Specifying a Range of Values

A range of values can be specified for the point code parameters **ni**, **nc**, or **ncm**.

If a range of values is specified for any of these parameters, and the value of the other parameters match existing values for the screening reference name, the range of values for the point code parameter cannot include any values for that parameter that are currently provisioned for the screening reference name.

For example, screening reference name **scr1** contains these entries:

SR	NI	NC	NCM	SSN	NSFI	NSR/ACT
SCR1	240	001	010	012	STOP	-----
SCR1	241	010	020	015	STOP	-----

Another entry for screening reference **scr1** with the **ni** value of 240 and the **nc** value of 001 cannot be specified if the range of values for the **ncm** parameter includes the value 010.

The ANSI point code parameter values can be specified as a single value, a range of values, or with an asterisk (*). The asterisk specifies all possible values for the **ni**, **nc**, and **ncm** parameters. [Table 3-2](#) shows the valid combinations of these parameter values.

Table 3-2. Valid Value Combinations for ANSI Point Code Parameters

NI	NC	NCM
Single Value	Single Value	Single Value
Single Value	Single Value	Range of Values
Single Value	Single Value	Asterisk
Single Value	Range of Values	Asterisk
Single Value	Asterisk	Asterisk
Range of Values	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

A range of values can also be specified for an ITU-I or 24-bit ITU-N point code parameter using a combination of asterisks (*) and single values for the point code parameters. [Table 3-3](#) shows the valid combinations of the ITU-I parameter values. [Table 3-4](#) shows the valid combinations of the 24-bit ITU-N parameter values.

Table 3-3. Valid Value Combinations for ITU-I Point Code Parameters

ZONE	AREA	ID
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Table 3-4. Valid Value Combinations for 24-Bit ITU-N Point Code Parameters

MSA	SSA	SP
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Procedure

1. Verify that the gateway screening feature is on, by entering the **rtrv-feat** command.

If the gateway screening feature is on, the **GWS** field is set to **on**.

NOTE: The rtrv-feat command output contains other fields that are not used by this procedure. If you wish to see all the fields displayed by the rtrv-feat command, see the rtrv-feat command description in the *Commands Manual*.

If the gateway screening feature is on, shown by the entry **GWS = on** in the **rtrv-feat** command output, skip step 2, and go to step 3.

2. Turn the gateway screening feature on by entering this command.

chg-feat:gws=on

NOTE: Once the gateway screening feature is turned on with the chg-feat command, it cannot be turned off.

The gateway screening feature must be purchased before you turn this feature on with the chg-feat command. If you are not sure if you have purchased the gateway screening feature, contact your Tekelec Sales Representative or Account Representative.

When the **chg-feat** has successfully completed, this message should appear.

```
rlghncxa03w 06-10-28 11:43:04 GMT EAGLE5 36.0.0
CHG-FEAT: MASP A - COMPLTD
```

3. Display all allowed AFTPC screens in the database using the **rtrv-scr-aftpc** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED AFTPC
SR   REF  RULES
IEC  YES   2
WRD2 YES   1
WRD4 YES   9
```

If the screening reference names that you wish to add with this procedure are not shown in the **rtrv-scr-aftpc** command output, go to step 4. For this example, the screening reference names are not shown. If these screening reference names are shown in the **rtrv-scr-aftpc** command output, make sure the screening data you wish to enter is not already in the database by entering the **rtrv-scr-aftpc** command with the screening reference name. For example, enter the **rtrv-scr-aftpc:sr=iec** command. The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED AFTPC
SR  NI   NC   NCM   SSN   NSF1  NSR/ACT
IEC 010   010   011   012   STOP  -----
IEC 010   010   013   012   STOP  -----
```

If a gateway screening stop action set is to be assigned to the allowed AFTPC screen being added to the database, go to step 4. Otherwise, go to step 5.

4. Display the gateway screening stop action sets in the database with the **rtrv-gws-actset** command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
ACT ACT ACT ACT ACT ACT ACT ACT ACT ACT
ID NAME 1 2 3 4 5 6 7 8 9 10
---
1 copy copy
2 rdct rdct
3 cr copy rdct
4 cncf cncf
5 cpcncf copy cncf
6 cncfrd cncf rdct
7 cpcfcd copy cncf rdct
```

GWS action set table is (7 of 16) 44% full

If the required gateway screening stop action set is not in the database, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure to configure the required gateway screening stop action set.

NOTE: If the point code being added in this procedure is not an ITU-I or 14-bit ITU-N spare point code, skip step 5 and to step 6.

NOTE: If the point code being added in this procedure is an ITU-I or 14-bit ITU-N spare point code and the screening reference contains ITU-I or 14-bit ITU-N spare point codes, skip step 5 and go to step 6.

5. Display the status of the ITU National and International Spare Point Code Support feature by entering the **rtrv-ctrl-feat** command with the ITU National and International Spare Point Code Support feature part number.

Enter this command.

```
rtrv-ctrl-feat:partnum=893013601
```

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
The following features have been permanently enabled:

Feature Name          Partnum   Status Quantity
Spare Point Code Support 893013601 on     ----

The following features have been temporarily enabled:

Feature Name          Partnum   Status Quantity   Trial Period Left
Zero entries found.

The following features have expired temporary keys:

Feature Name          Partnum
Zero entries found.
```

If the ITU National and International Spare Point Code Support feature is enabled, go to step 6.

If the ITU National and International Spare Point Code Support feature is not enabled, perform the “Activating the ITU National and International Spare Point Code Support Feature” procedure in the *Database Administration Manual - SS7* to enable the ITU National and International Spare Point Code Support feature as required. After the feature has been enabled, go to step 6.

6. Add the new allowed AFTPC screen to the database using the **ent-scr-aftpc** command.



CAUTION: The EAGLE 5 ISS does not support redirecting MSUs for the DTA feature or intercepting ISUP IAM messages for the Calling Name Conversion Facility feature from the allowed AFTPC screen. Gateway screening stop action sets containing either the RDCT (redirect) or CNCF (calling name conversion facility) stop actions should not be assigned to the allowed AFTPC screen. If a gateway screening stop action set containing the RDCT or CNCF stop actions is specified with the **ent-scr-aftpc** command, unsolicited information message (UIM) 1127 is generated when the attempt is made to redirect MSUs from the allowed AFTPC screen. Unsolicited information message (UIM) 1217 is generated when ISUP IAM MSUs are intercepted from the allowed AFTPC screen. For more information on UIMs 1127 and 1217, go to the *Maintenance Manual*.

If a gateway screening stop action is to be assigned to the allowed AFTPC screen being changed, enter the **ent-scr-aftpc** command with the **nsfi=stop** parameter and the **actname** parameter with the name of a gateway screening stop action set shown in the output of the **rtrv-gws-actset** command executed in step 4.

The following list contains the values for **ni**, **nc**, **ncm**, **zone**, **area**, **id**, **npc**, **msa**, **ssa**, **sp**, and **ssn** parameters:

- **ni** – 0 - 255 or an asterisk (*)
- **nc** – 0 - 255 or an asterisk (*)
- **ncm** – 0 - 255 or an asterisk (*)
- **zone** – 0 - 7 or an asterisk (*)
- **area** – 0 - 255 or an asterisk (*)
- **id** – 0 - 7 or an asterisk (*)
- **npc** – 1 - 16383 or an asterisk (*)
- **msa** – 0 - 255 or an asterisk (*)
- **ssa** – 0 - 255 or an asterisk (*)
- **sp** – 0 - 255 or an asterisk (*)
- **ssn** – 0 - 255 or an asterisk (*)

A range of values can be specified for the **ni**, **nc**, and **ncm** parameters. See the [“Specifying a Range of Values”](#) section for more information on how the asterisk and a range of values are used for the **ni**, **nc**, and **ncm** parameters.

To add a spare point code to the allowed AFTPC screen, the **pcst=s** parameter must be specified. To add a non-spare point code to the allowed AFTPC screen, the **pcst** parameter does not have to be specified. If the **pcst** parameter is specified for a screen containing an ITU-I or 14-bit ITU-N non-spare point code, the value must be **none**. For this example, enter these commands.

```
ent-scr-  
aftpc:sr=gw20:ni=008:nc=008:ncm=008:ssn=250:nsfi=stop :actname=copy
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0  
ENT-SCR-AFTPC: SCREEN SET AFFECTED - GW20 1% FULL  
ENT-SCR-AFTPC: MASP A - COMPLTD
```

```
ent-scr-
aftpc:sr=ls04:ni=010:nc=010:ncm=010:ssn=015:nsfi=stop :actname=copy
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
ENT-SCR-AFTPC: SCREEN SET AFFECTED - LS04 1% FULL
ENT-SCR-AFTPC: MASP A - COMPLTD
```

7. Verify the changes using the **rtrv-scr-aftpc** command with the screening reference name used in step 6.

For this example, enter these commands.

```
rtrv-scr-aftpc:sr=gw20
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:29:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED AFTPC
SR   NI      NC      NCM      SSN      NSFI     NSR/ACT
GW20 008      008      008      250      STOP     COPY
```

```
rtrv-scr-aftpc:sr=ls04
```

The following is an example of the possible output.


```
rlghncxa03w 06-10-25 15:30:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED AFTPC
SR   NI      NC      NCM      SSN      NSFI     NSR/ACT
LS04 010      010      010      015      STOP     COPY
```


8. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 3-2. Adding an Allowed Affected Point Code Screen

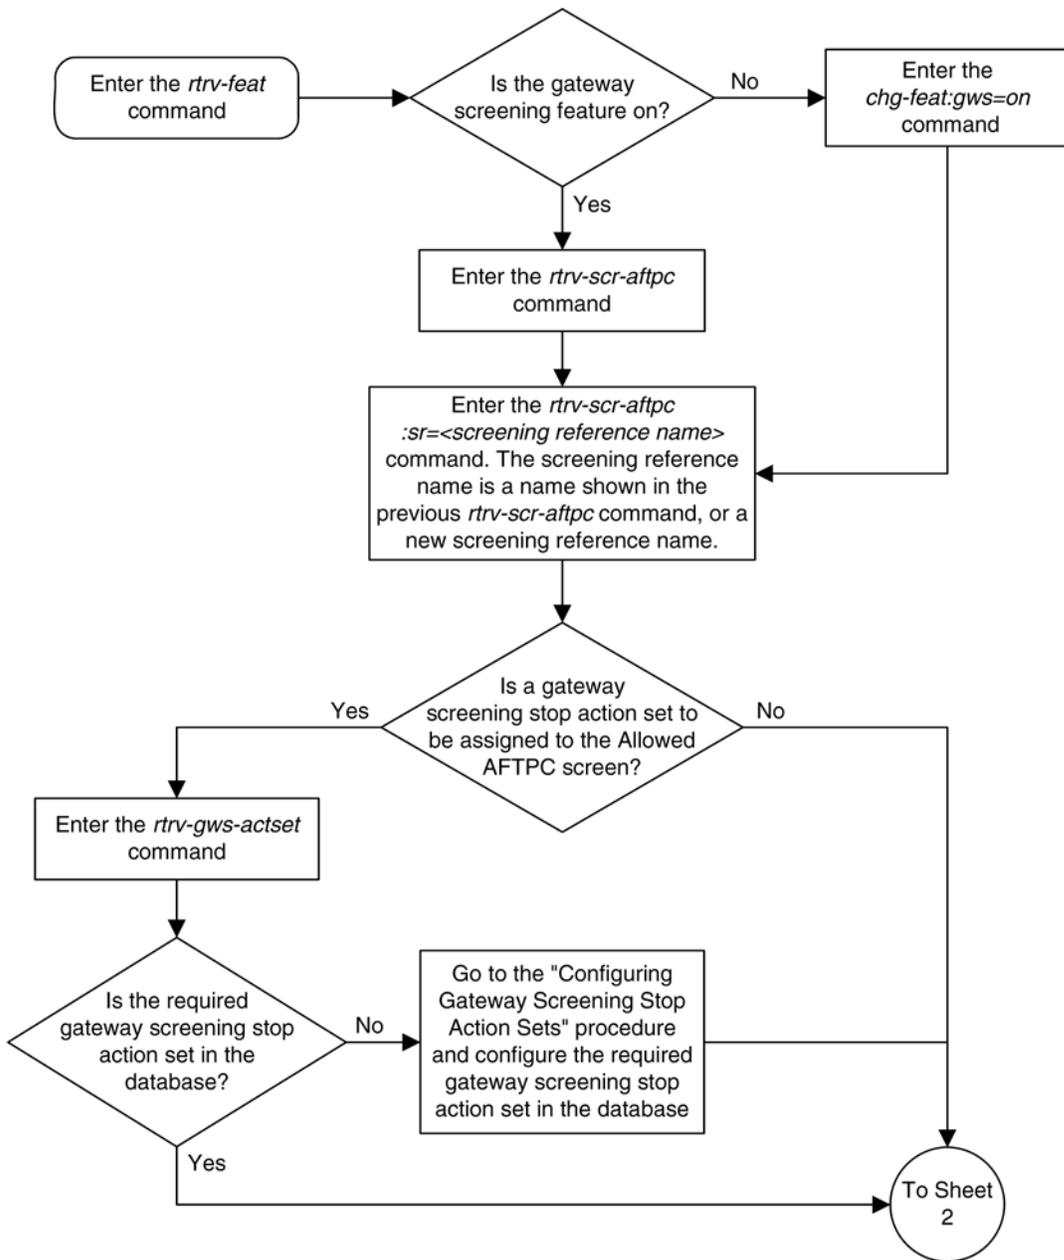

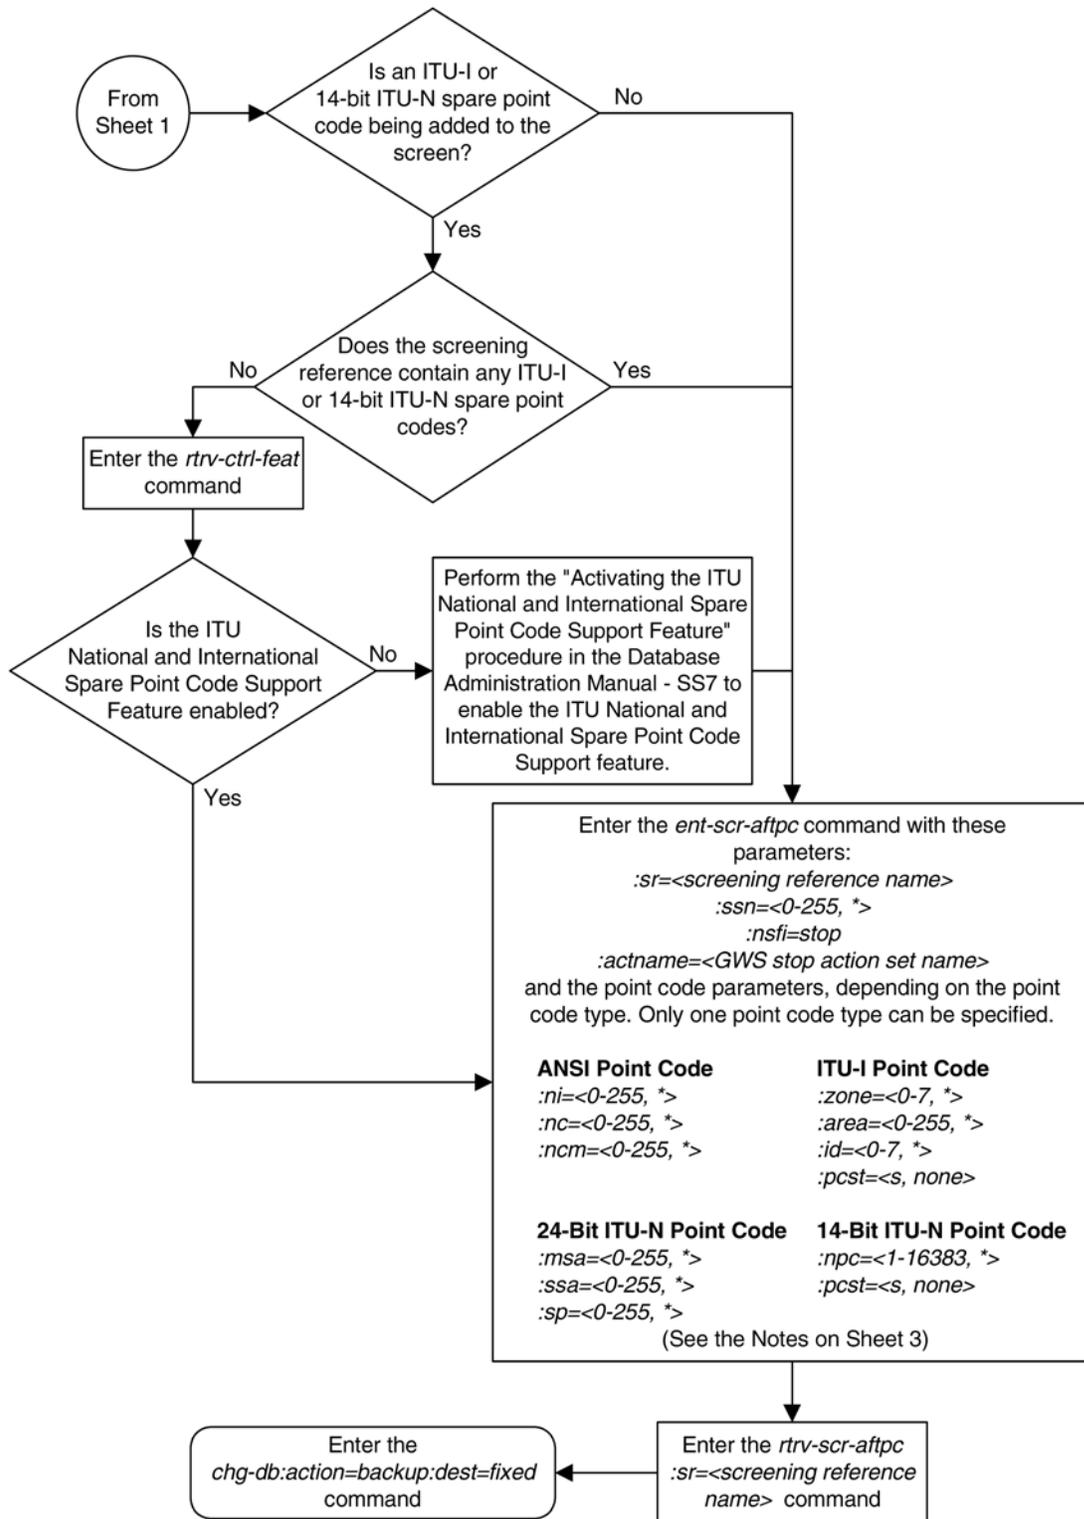

Notes:

1. A range of values can be specified for the *ni*, *nc*, or *ncm* parameters by inserting double ampersands (&&) between the parameter values defining the range. For example, to specify the range 025 to 200 for the *ni* parameter, enter 025&&200 for the *ni* parameter value.

2. The asterisk (*) specifies the entire range of values for that parameter.

For more information about specifying a range of values and about using the asterisk, see the "Gateway Screening Attributes" section in Chapter 2 and the "Specifying a Range of Values" section in this procedure.

3. The *actname* parameter is optional. If the *actname* parameter is specified, the *actname* parameter value is one of the gateway screening stop action set names shown in the *rtv-gws-actset* output on Sheet 1.

4. To add a non-spare point code, the *pcst* parameter does not have to be specified. If the *pcst* parameter is specified for a screen containing an ITU-I or 14-bit ITU-N non-spare point code, the value must be *none*.

5. To add a spare point code, the *pcst=s* parameter must be specified.

Removing an Allowed Affected Point Code Screen

This procedure is used to remove an allowed affected point code (AFTPC) screen from the database using the **dlt-scr-aftpc** command. The parameters used by the **dlt-scr-aftpc** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The example in this procedure removes the allowed AFTPC screen **wrd0** from the database.

NOTE: If you using multiple-part ITU national point codes with gateway screening, see the [14-Bit ITU National Point Code Formats](#) section.

Procedure

1. Display the allowed AFTPC screens in the database using the **rtrv-scr-aftpc** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED AFTPC
SR      REF  RULES
GW20    YES   1
IEC     YES   2
LS04    YES   1
WRD0    YES   1
WRD2    YES   1
WRD4    YES   9
```

From the **rtrv-scr-aftpc** output, display the allowed AFTPC screen you wish to remove using the **rtrv-scr-aftpc** command with the screening reference name. For this example, enter the **rtrv-scr-aftpc:sr=wrd0** command. The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED AFTPC
SR      ZONE  AREA  ID      SSN      NSFI     NSR/ACT
WRD0    1       004   6       023     STOP    -----
```

2. An allowed AFTPC screen can only be referenced by an allowed CDPA screen.

Verify any references to the allowed AFTPC screen being removed from the database using the **rtrv-scr-cdpa:nsfi=aftpc** command. The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED CDPA
SR      ZONE  AREA  ID      SSN      SCMGFID  NSFI    NSR/ACT
IEC     1      134   *       001      002      AFTPC   IEC

SR      ZONE  AREA  ID      SSN      SCMGFID  NSFI    NSR/ACT
WRD1    1      004   6       001      005      AFTPC   WRD0

SR      NPC
WRD4    12345                001      100      AFTPC   IEC
```

If the screen being removed is referenced by any CDPA screens, perform the [Changing an Allowed Called Party Address Screen](#) procedure to change the NSFI of those CDPA screens to reference other AFTPC screens or change the NSFI of these screens to STOP.

- Remove the allowed AFTPC screen from the database using the **dlt-scr-aftpc** command with the screening reference name shown in the **rtrv-scr-aftpc** output in step 1 and with the point code parameter values (**ni**, **nc**, **ncm**, or **zone**, **area**, **id**, or **npc**, or **msa**, **ssa**, **sp**) and the **ssn** parameter value of the screen being removed from the database.

The values for these parameters must be entered exactly as shown in the **rtrv-scr-aftpc** output.

To remove an entry containing either an ITU-I or a 14-bit ITU-N spare point code, the **pcst=s** parameter must be specified with the **dlt-scr-aftpc** command.

To remove an entry containing either an ITU-I or a 14-bit ITU-N non-spare point code, the **pcst** parameter does not have to be specified with the **dlt-scr-aftpc** command. If the **pcst** parameter is specified, the value must be **none**.

For this example, enter this command.

```
dlt-scr-aftpc:sr=wrd0:zone=1:area=004:id=6:ssn=023
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:29:30 GMT EAGLE5 36.0.0
DLT-SCR-AFTPC: SCREEN SET AFFECTED - WRD0 0% FULL
DLT-SCR-AFTPC: MASP A - COMPLTD
```

- Verify the changes using the **rtrv-scr-aftpc** command with screening reference name used in step 3.

For this example, enter this command.

```
rtrv-scr-aftpc:sr=wrd0
```

The following message should appear.

```
E2573 Cmd Rej: SR or NSR does not reference an existing SR
```


This message shows that the specified screening reference name is not in the database and the action of the **dlt-scr-aftpc** command in step 5 was successful. If the specified screening reference name contained more than one entry when the **dlt-scr-aftpc** command was executed in step 4, the **rtrv-scr-aftpc:sr=** command output would show the remaining entries in the screening reference instead of error message E2573.

- Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.  
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.  
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.  
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 3-3. Removing an Allowed Affected Point Code Screen

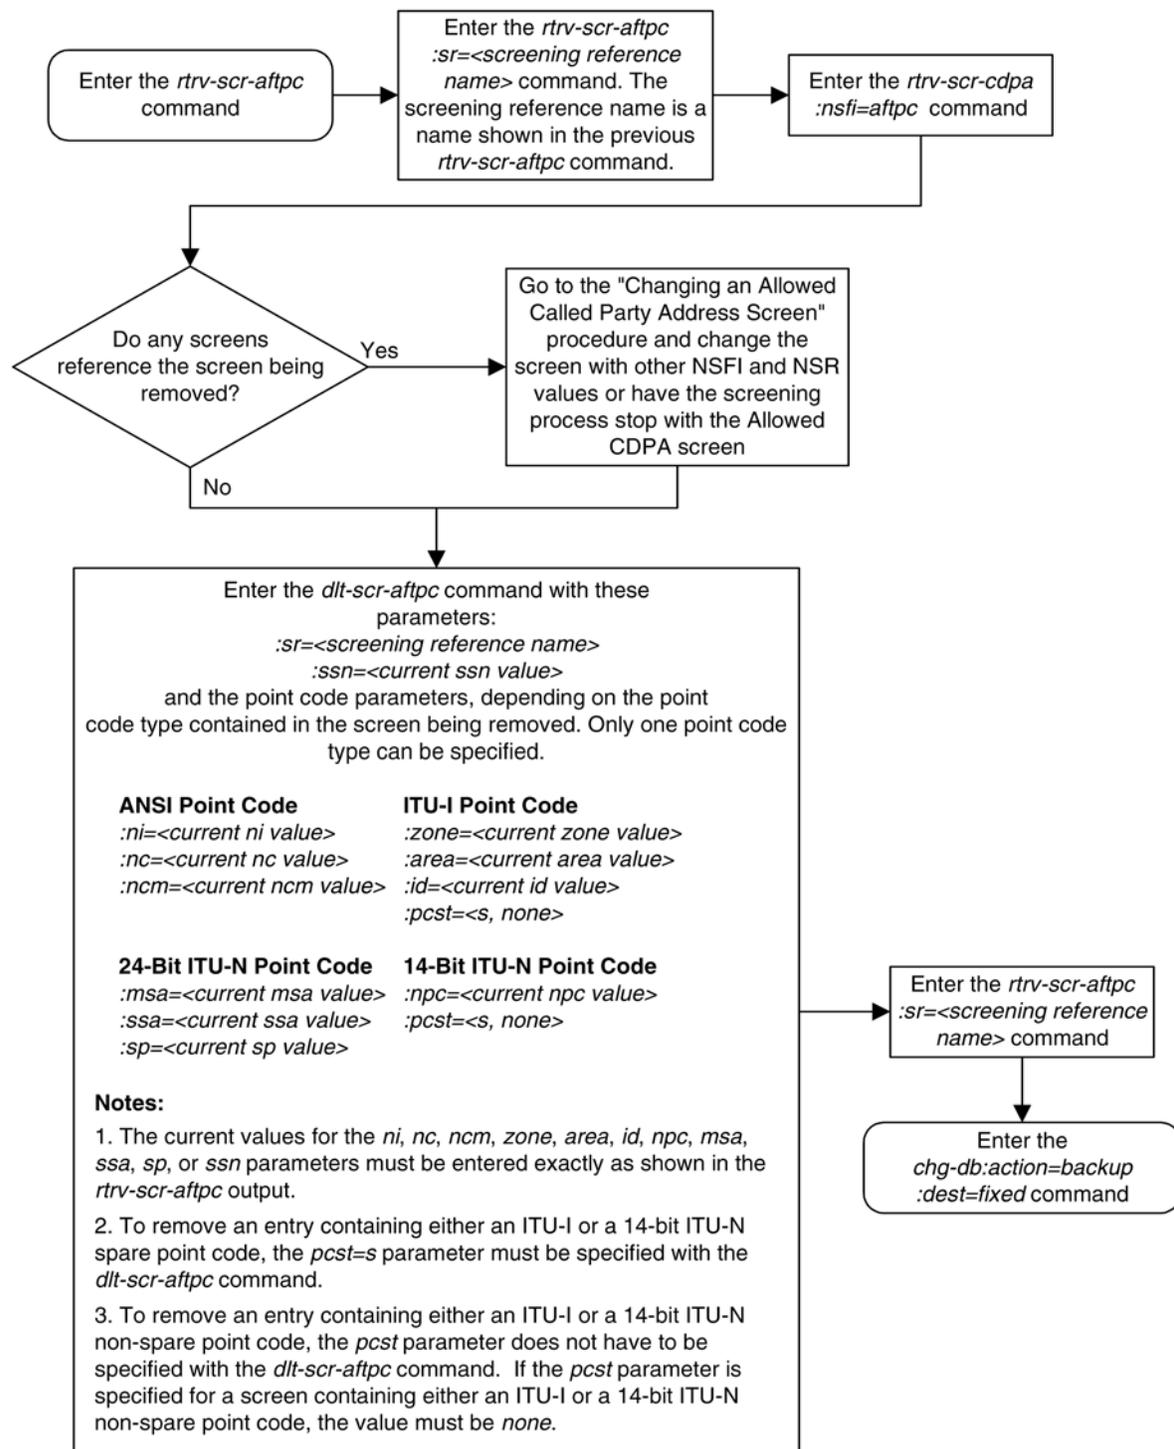

Changing an Allowed Affected Point Code Screen

This procedure is used to change the attributes of an allowed affected point code (AFTPC) screen in the database using the `chg-scr-aftpc` command. The parameters used by the `chg-scr-aftpc` command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The example in this procedure is used to change the point code 009-009-009 for the allowed AFTPC screen `gw21` to 100-100-100, and the subsystem number from 253 to 150.

NOTE: If you using multiple-part ITU national point codes with gateway screening, see the [14-Bit ITU National Point Code Formats](#) section.

Specifying a Range of Values

A range of values can be specified for the point code parameters `ni`, `nc`, or `ncm`.

If a range of values is specified for any of these parameters, and the value of the other parameters match existing values for the screening reference name, the range of values for the point code parameter cannot include any values for that parameter that are currently provisioned for the screening reference name.

For example, screening reference name `scr1` contains these entries:

SR	NI	NC	NCM	SSN	NSFI	NSR/ACT
SCR1	240	001	010	012	STOP	-----
SCR1	241	010	020	015	STOP	-----

Another entry for screening reference `scr1` with the `ni` value of 240 and the `nc` value of 001 cannot be specified if the range of values for the `ncm` parameter includes the value 010.

The ANSI point code parameter values can be specified as a single value, a range of values, or with an asterisk (*). The asterisk specifies all possible values for the `ni`, `nc`, and `ncm` parameters. [Table 3-5](#) shows the valid combinations of these parameter values.

Table 3-5. Valid Value Combinations for ANSI Point Code Parameters

NI	NC	NCM
Single Value	Single Value	Single Value
Single Value	Single Value	Range of Values
Single Value	Single Value	Asterisk
Single Value	Range of Values	Asterisk
Single Value	Asterisk	Asterisk
Range of Values	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

A range of values can also be specified for an ITU-I or 24-bit ITU-N point code parameter using a combination of asterisks (*) and single values for the point code parameters. [Table 3-6](#) shows the valid combinations of the ITU-I parameter values. [Table 3-7](#) shows the valid combinations of the 24-bit ITU-N parameter values.

Table 3-6. Valid Value Combinations for ITU-I Point Code Parameters

ZONE	AREA	ID
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Table 3-7. Valid Value Combinations for 24-Bit ITU-N Point Code Parameters

MSA	SSA	SP
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Procedure

1. Display the allowed AFTPC screens in the database using the **rtrv-scr-aftpc** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED AFTPC
SR   REF  RULES
GW20 YES   1
GW21 YES   1
IEC  YES   2
LS04 YES   1
WRD0 YES   1
WRD2 YES   1
WRD4 YES   9
```

From the **rtrv-scr-aftpc** output, display the allowed AFTPC screen you wish to change using the **rtrv-scr-aftpc** command with the screening reference name. For this example, enter this command.

```
rtrv-scr-aftpc:sr=gw21
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED AFTPC
SR  NI      NC      NCM      SSN      NSFI      NSR/ACT
GW21 009     009     009     253     STOP     -----
```

If a gateway screening stop action set is to be assigned to the allowed AFTPC screen being changed in this procedure, go to step 2. Otherwise, skip step 2 and go to step 3.

2. Display the gateway screening stop action sets in the database with the **rtrv-gws-actset** command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
ACT ACT  ACT ACT  ACT ACT  ACT ACT  ACT ACT  ACT ACT
ID  NAME  1    2    3    4    5    6    7    8    9    10
```

```

-- -----
1  copy  copy
2  rdct  rdct
3  cr    copy rdct
4  cnf   cnf
5  cpncf copy cnf
6  cnfcrd cnf rdct
7  cpcfrd copy cnf rdct

```

GWS action set table is (7 of 16) 44% full

If the required gateway screening stop action set is not in the database, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure to configure the required gateway screening stop action set.

3. Display the status of the ITU National and International Spare Point Code Support feature by entering the **rtrv-ctrl-feat** command with the ITU National and International Spare Point Code Support feature part number.

NOTE: If any of these conditions apply to this procedure, skip this step and go to step 4:

- The point code in the screen is not being changed.
- The screen being changed contains either an ANSI or 24-bit ITU-N point code.
- The ITU-I or 14-bit ITU-N non-spare point code in the screen is not being changed to an ITU-I or 14-bit ITU-N spare point code.
- The point code in the screen is an ITU-I or 14-bit ITU-N spare point code or the screening reference contains other screens with ITU-I or 14-bit ITU-N spare point codes.

Enter this command.

```
rtrv-ctrl-feat:partnum=893013601
```

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
The following features have been permanently enabled:
```

Feature Name	Partnum	Status	Quantity
Spare Point Code Support	893013601	on	----

The following features have been temporarily enabled:

Feature Name	Partnum	Status	Quantity	Trial Period Left
Zero entries found.				

The following features have expired temporary keys:

Feature Name	Partnum
Zero entries found.	

If the ITU National and International Spare Point Code Support feature is enabled, go to step 4.

If the ITU National and International Spare Point Code Support feature is not enabled, perform the “Activating the ITU National and International Spare Point Code Support Feature” procedure in the *Database Administration Manual - SS7* to enable the ITU National and International Spare Point Code Support feature as required. After the feature has been enabled, go to step 4.

4. Change the attributes of an allowed AFTPC screen using the **chg-scr-aftpc** command.

If a gateway screening stop action is to be assigned to the allowed AFTPC screen being changed, enter the **chg-scr-aftpc** command with the **nsfi=stop** parameter and the **actname** parameter with the name

of a gateway screening stop action set shown in the output of the `rtrv-gws-actset` command executed in step 2.

The current values for the `ni`, `nc`, `ncm`, `zone`, `area`, `id`, `npc`, `msa`, `ssa`, `sp`, and `ssn` parameters must be entered exactly as shown in the `rtrv-scr-aftpc` output in step 1.

The following list contains the values for the `nni`, `nnc`, `nncm`, `nzone`, `narea`, `nid`, `nnpc`, `nmsa`, `nssa`, `nsp`, and `nssn` parameters:

- `nni` - 0-255 or an asterisk (*)
- `nnc` - 0-255 or an asterisk (*)
- `nncm` - 0-255 or an asterisk (*)
- `nzone` - 0-7 or an asterisk (*)
- `narea` - 0-255 or an asterisk (*)
- `nid` - 0-7 or an asterisk (*)
- `nnpc` - 1 - 16383 or an asterisk (*)
- `nmsa` - 0-255 or an asterisk (*)
- `nssa` - 0-255 or an asterisk (*)
- `nsp` - 0-255 or an asterisk (*)

A range of values can be specified for the `nni`, `nnc`, and `nncm` parameters. See the [“Specifying a Range of Values”](#) section for more information on how the asterisk and a range of values are used for the `nni`, `nnc`, and `nncm` parameters.

To change an ITU-I or 14-bit ITU-N spare point code to a non-spare point code, both the `pcst=s` and `npcst=none` parameters must be specified with the `chg-scr-aftpc` command.

To change an ITU-I or 14-bit ITU-N non-spare point code to a spare point code, the `npcst=s` parameter must be specified with the `chg-scr-aftpc` command. The `pcst` parameter does not have to be specified.

If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N spare point code, the `pcst=s` parameter must be specified with the `chg-scr-aftpc` command.

If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N non-spare point code, the `pcst` parameter does not have to be specified with the `chg-scr-aftpc` command. If the `pcst` parameter is specified for a screen containing either an ITU-I or 14-bit ITU-N non-spare point code, the `pcst` parameter value must be `none`.

For this example, enter this command.

```
chg-scr-
aftpc:sr=gw21:ni=009:nc=009:ncm=009:ssn=253:nni=100 :nnc=100:nncm=100:n
ssn=150
```



CAUTION: The EAGLE 5 ISS does not support redirecting MSUs for the DTA feature or intercepting ISUP IAM messages for the Calling Name Conversion Facility feature from the allowed AFTPC screen. Gateway screening stop action sets containing either the RDCT (redirect) or CNCF (calling name conversion facility) stop actions should not be assigned to the allowed AFTPC screen. If a gateway screening stop action set containing the RDCT or CNCF stop actions is specified with the `chg-scr-aftpc`

command, unsolicited information message (UIM) 1127 is generated when the attempt is made to redirect MSUs from the allowed AFTPC screen. Unsolicited information message (UIM) 1217 is generated when ISUP IAM MSUs are intercepted from the allowed AFTPC screen. For more information on UIMs 1127 and 1217, go to the *Maintenance Manual*.

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
CHG-SCR-AFTPC: SCREEN SET AFFECTED - GW21 1% FULL
CHG-SCR-AFTPC: MASP A - COMPLTD
```

5. Verify the changes using the **rtrv-scr-aftpc** command with screening reference name used in step 4.

For this example, enter this command.

```
rtrv-scr-aftpc:sr=gw21
```

The following is an example of the possible output.


```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED AFTPC
SR      NI      NC      NCM      SSN      NSFI      NSR/ACT
GW21   100      100      100      150      STOP      -----
```


6. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.


The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 3-4. Changing an Allowed Affected Point Code Screen

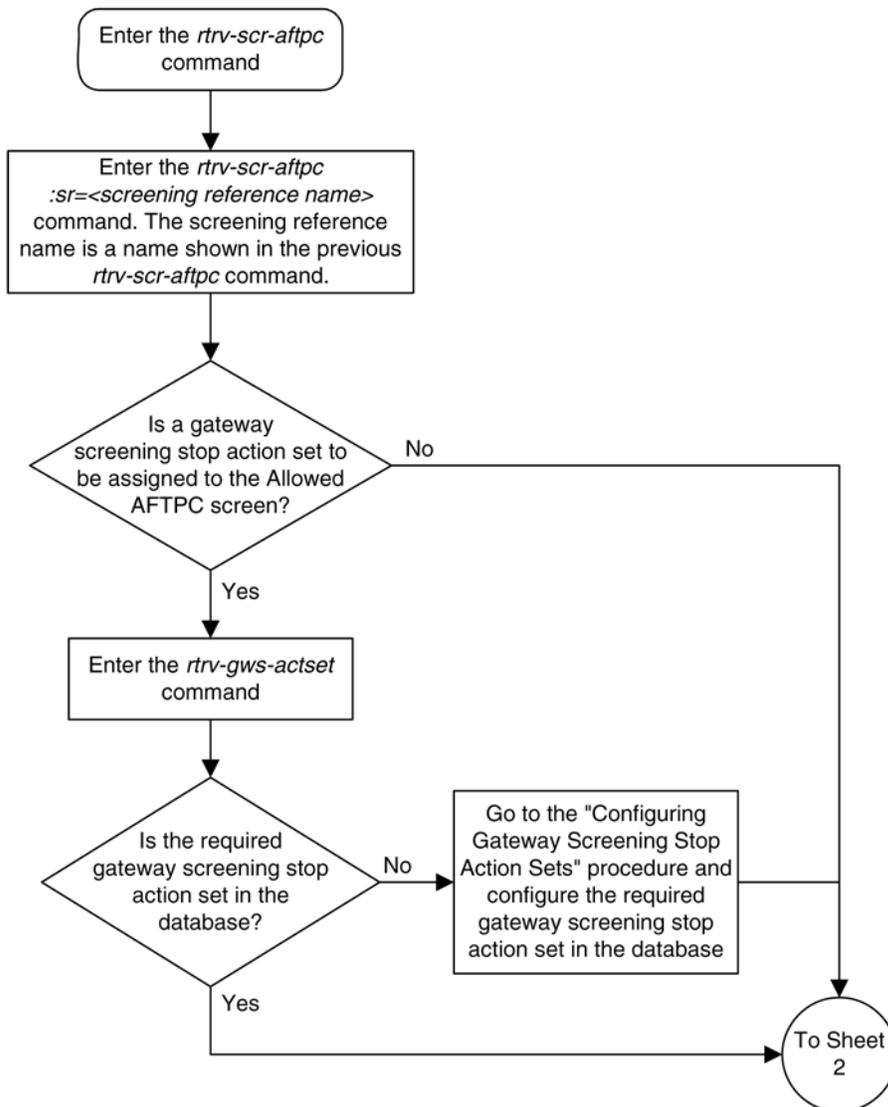

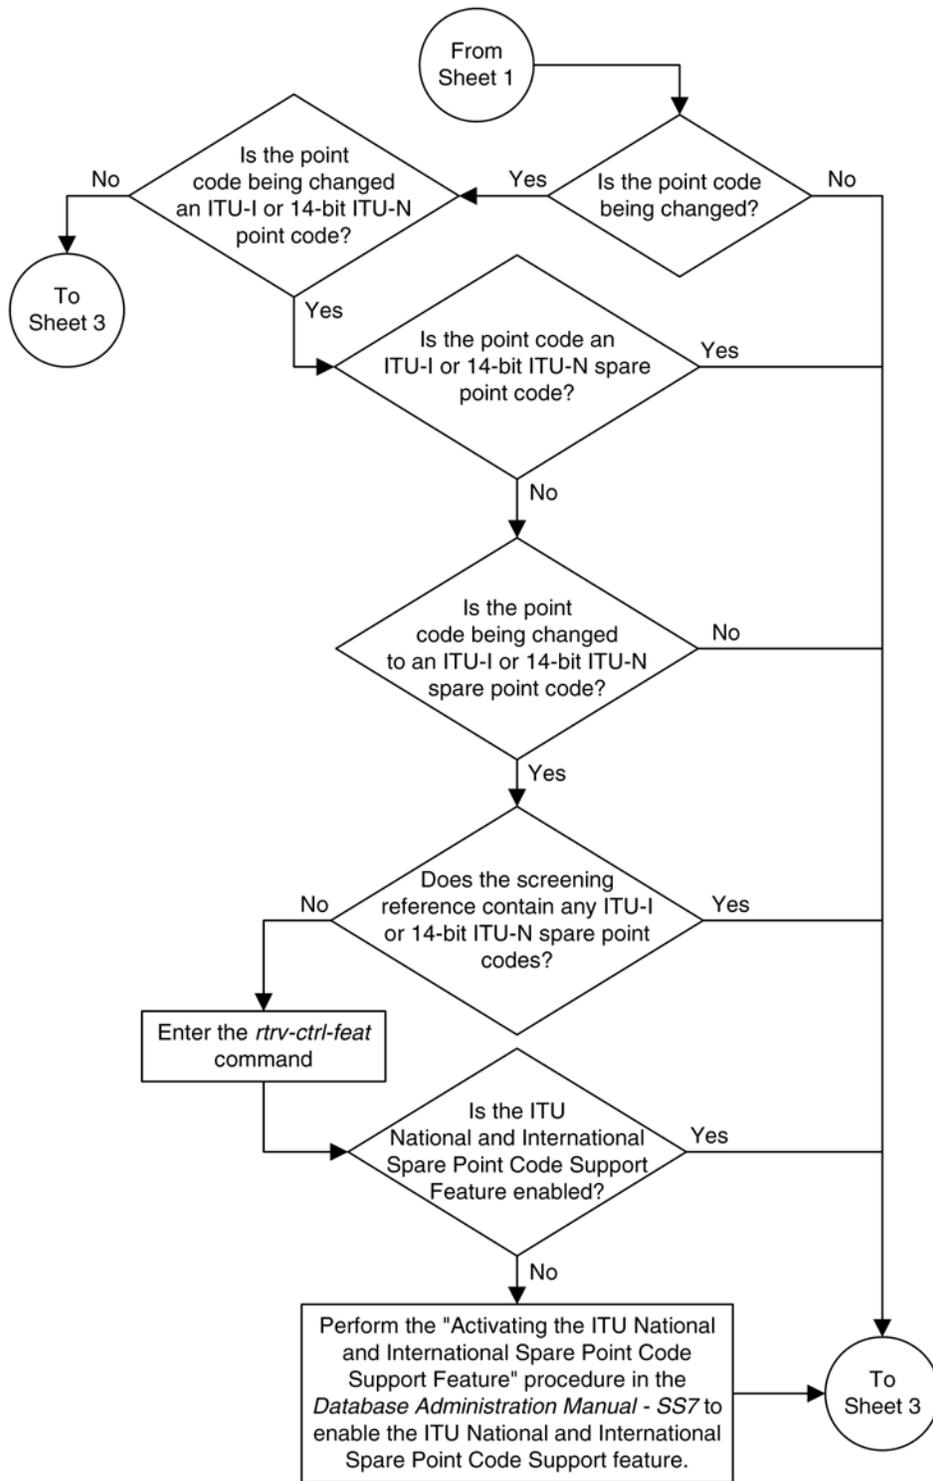

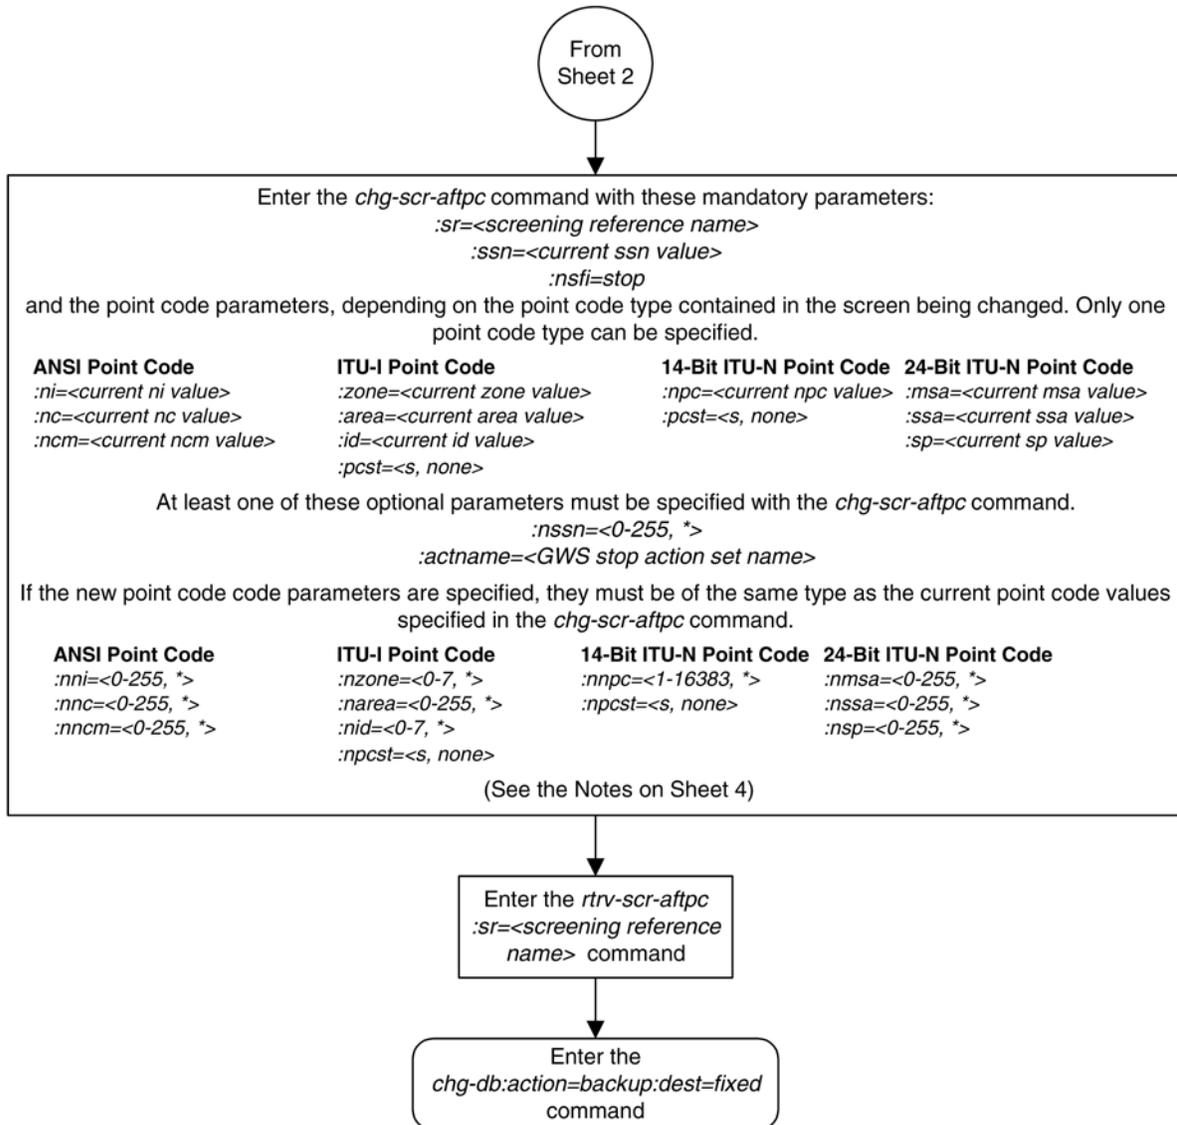

Notes:

1. A range of values can be specified for the *ni*, *nc*, or *ncm* parameters by inserting double ampersands (&&) between the parameter values defining the range. For example, to specify the range 025 to 200 for the *ni* parameter, enter 025&&200 for the *ni* parameter value.

2. The current values for the *ni*, *nc*, *ncm*, *zone*, *area*, *id*, or *ssn* parameters must be entered exactly as shown in the *rtv-scr-aftpc* output.

3. The asterisk (*) specifies the entire range of values for that parameter.

For more information about specifying a range of values and about using the asterisk, see the "Gateway Screening Attributes" section in Chapter 2 and the "Specifying a Range of Values" section in this procedure.

4. The *actname* parameter is optional. If the *actname* parameter is specified, the *actname* parameter value is one of the gateway screening stop action set names shown in the *rtv-gws-actset* output on Sheet 1.

5. To change an ITU-I or 14-bit ITU-N spare point code to a non-spare point code, both the *pcst=s* and *npcst=none* parameters must be specified with the *chg-scr-aftpc* command.

6. To change an ITU-I or 14-bit ITU-N non-spare point code to a spare point code, the *npcst=s* parameter must be specified with the *chg-scr-aftpc* command. The *pcst* parameter does not have to be specified.

7. If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N spare point code, the *pcst=s* parameter must be specified with the *chg-scr-aftpc* command.

8. If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N non-spare point code, the *pcst* parameter does not have to be specified with the *chg-scr-aftpc* command. If the *pcst* parameter is specified for a screen containing either an ITU-I or 14-bit ITU-N non-spare point code, the *pcst* parameter value must be *none*.

Allowed Called Party (CDPA) Screen Configuration

Introduction	4-1
Adding an Allowed Called Party Address Screen	4-3
Removing an Allowed Called Party Address Screen	4-13
Changing an Allowed Called Party Address Screen	4-17

Introduction

The allowed called party address (CDPA) screen is used to screen SCCP messages for a DPC in the routing label and a subsystem number in the called party address. The gray shaded areas in [Figure 4-1](#) shows the fields of the SS7 message that are checked by the CDPA screening function. The screening reference contains a list of point codes and subsystem number combinations. If a match is found, the **nsfi** is examined to determine the next step in the screening process. If the **nsfi** is equal to **stop**, the message is processed and no further screening takes place.

If the **nsfi** is equal to **stop**, and the **copy** gateway screening stop action is specified, the message is processed and a copy of the message is sent by the STPLAN feature to an external application.

If the **nsfi** is equal to anything else, the next screening reference (**nsr**) is identified and the screening process continues to the next screen identified by the **nsfi** and **nsr** parameters. If no match is found, the message is discarded.

[Flowchart 4-12](#) shows the screening action of the allowed CDPA screen.

Flowchart 4-1. Allowed CDPA Screening Action

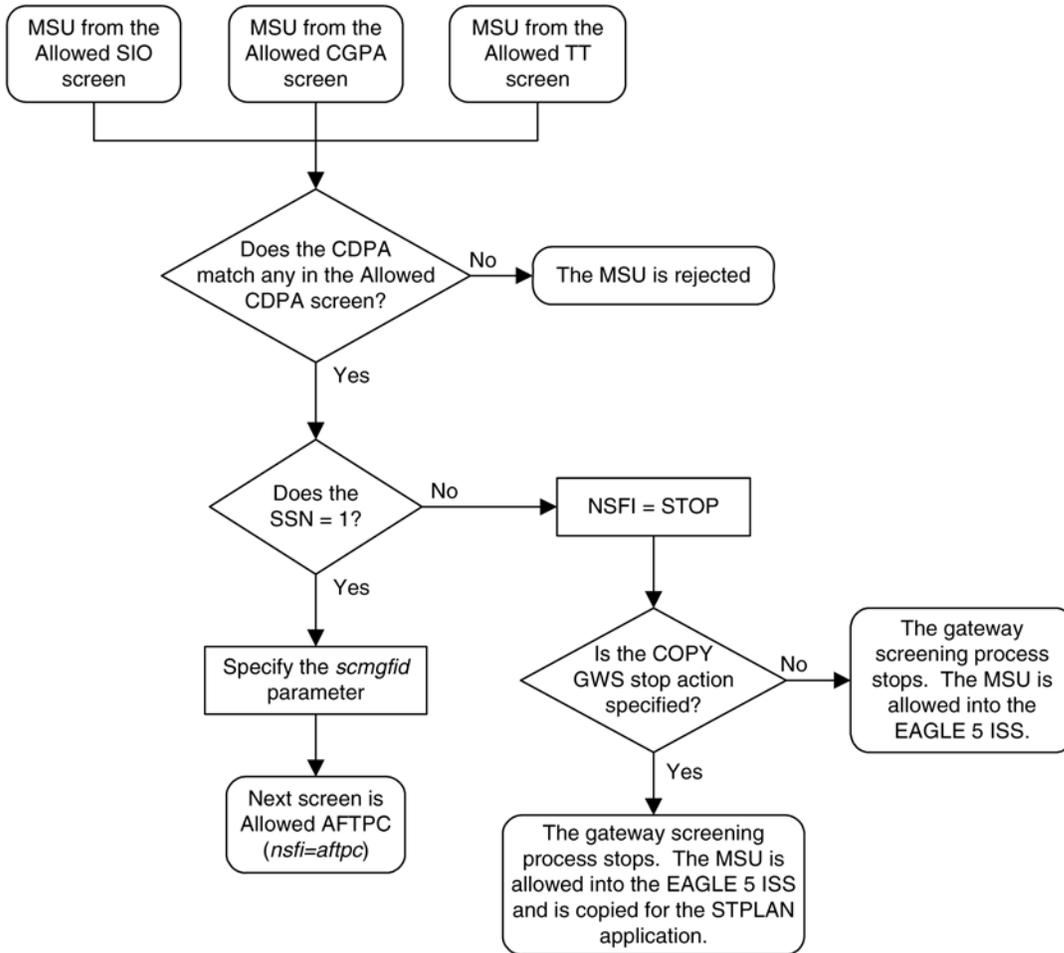


Figure 4-1. Allowed Called Party Address Screening Function

ANSI MSU (ANSI Message Signal Unit)						
BSN FSN LI	SIO xx xx xxxx NIC PRI SI	SIF				
		Routing Label DPC OPC SLS NCM NC NI NCM NC NI xx			CGPA Length Address Indicator Subsystem Point Code (NCM NC NI)	CDPA Length Address Indicator (x x xxxx xx) (x RI xxxx xx) Subsystem Point Code (NCM NC NI)
ITU-I MSU (ITU International Message Signal Unit)						
BSN FSN LI	SIO xx xx xxxx NIC PRI SI	SIF				
		Routing Label DPC OPC SLS ID AREA ZONE ID AREA ZONE xx			CGPA Length Address Indicator Subsystem Point Code (ID AREA ZONE)	CDPA Length Address Indicator (x x xxxx xx) (x RI xxxx xx) Subsystem Point Code (ID AREA ZONE)
14-Bit ITU-N MSU (14-Bit ITU National Message Signal Unit)						
BSN FSN LI	SIO xx xx xxxx NIC PRI SI	SIF				
		Routing Label DPC OPC SLS NPC NPC xx			CGPA Length Address Indicator Subsystem Point Code (NPC)	CDPA Length Address Indicator (x x xxxx xx) (x RI xxxx xx) Subsystem Point Code (NPC)
24-Bit ITU-N MSU (24-bit ITU National Message Signal Unit)						
BSN FSN LI	SIO xx xx xxxx NIC PRI SI	SIF				
		Routing Label DPC OPC SLS SP SSA MSA SP SSA MSA xx			CGPA Length Address Indicator Subsystem Point Code (SP SSA MSA)	CDPA Length Address Indicator (x x xxxx xx) (x RI xxxx xx) Subsystem Point Code (SP SSA MSA)

Adding an Allowed Called Party Address Screen

This procedure is used to add an allowed called party address (CDPA) screen to the database using the `ent-scr-cdpa` command. The parameters used by the `ent-scr-cdpa` command are shown in the [Gateway Screening](#)

[Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The examples in this procedure are used to add the allowed CDPA screen data shown in [Table 4-1](#) and based on the example configurations shown in [Figure 2-3](#) through [Figure 2-6](#).

Table 4-1. Example Gateway Screening Allowed CDPA Configuration Table

Screening Reference	ZONE	AREA	ID	SSN	SCMGFID	NSFI	NSR
gw15	5	117	2	254	----	stop	----
Screening Reference	NI	NC	NCM	SSN	SCMGFID	NSFI	NSR
gw17	003	003	003	001	050	aftpc	gw20
gw18	006	006	006	253	----	stop	----
ls03	007	007	007	001	100	aftpc	ls04

NOTE: If you using multiple-part ITU national point codes with gateway screening, see the [14-Bit ITU National Point Code Formats](#) section.

The allowed CDPA screen can only reference an allowed AFTPC screen and the allowed AFTPC screen being referenced must be in the database. This can be verified using the `rtrv-scr-aftpc:all=yes` command. If the desired allowed AFTPC screen is not in the database, perform one of these procedures to add the required screen to the database or change an existing screen in the database.

- [Adding an Allowed Affected Point Code Screen](#)
- [Changing an Allowed Affected Point Code Screen](#)

Specifying a Range of Values

A range of values can be specified for the point code parameters **ni**, **nc**, or **ncm**.

If a range of values is specified for any of these parameters, and the value of the other parameters match existing values for the screening reference name, the range of values for the point code parameter cannot include any values for that parameter that are currently provisioned for the screening reference name.

For example, screening reference name **scr1** contains these entries:

SR	NI	NC	NCM	SSN	SCMGFID	NSFI	NSR/ACT
SCR1	240	001	010	012	-----	STOP	-----
SCR1	241	010	020	001	002	AFTPC	SCR1

Another entry for screening reference **scr1** with the **ni** value of 240 and the **nc** value of 001 cannot be specified if the range of values for the **ncm** parameter includes the value 010.

The ANSI point code parameter values can be specified as a single value, a range of values, or with an asterisk (*). The asterisk specifies all possible values for the **ni**, **nc**, and **ncm** parameters. [Table 4-2](#) shows the valid combinations of these parameter values.

Table 4-2. Valid Value Combinations for ANSI Point Code Parameters

NI	NC	NCM
Single Value	Single Value	Single Value
Single Value	Single Value	Range of Values
Single Value	Single Value	Asterisk
Single Value	Range of Values	Asterisk

NI	NC	NCM
Single Value	Asterisk	Asterisk
Range of Values	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

A range of values can also be specified for an ITU-I or 24-bit ITU-N point code parameter using a combination of asterisks (*) and single values for the point code parameters. [Table 4-3](#) shows the valid combinations of the ITU-I parameter values. [Table 4-4](#) shows the valid combinations of the 24-bit ITU-N parameter values.

Table 4-3. Valid Value Combinations for ITU-I Point Code Parameters

ZONE	AREA	ID
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Table 4-4. Valid Value Combinations for 24-Bit ITU-N Point Code Parameters

MSA	SSA	SP
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Procedure

1. Verify that the gateway screening feature is on, by entering the **rtrv-feat** command.

If the gateway screening feature is on, the **GWS** field is set to **on**.

NOTE: The rtrv-feat command output contains other fields that are not used by this procedure. If you wish to see all the fields displayed by the rtrv-feat command, see the rtrv-feat command description in the *Commands Manual*.

If the gateway screening feature is on, shown by the entry **GWS = on** in the **rtrv-feat** command output, skip step 2, and go to step 3.

2. Turn the gateway screening feature on by entering this command.

```
chg-feat:gws=on
```

NOTE: Once the gateway screening feature is turned on with the chg-feat command, it cannot be turned off.

The gateway screening feature must be purchased before you turn this feature on with the chg-feat command. If you are not sure if you have purchased the gateway screening feature, contact your Tekelec Sales Representative or Account Representative.

When the **chg-feat** has successfully completed, this message should appear.

```
r1ghncxa03w 06-10-28 11:43:04 GMT EAGLE5 36.0.0
CHG-FEAT: MASP A - COMPLTD
```

3. Display all allowed CDPA screens in the database using the **rtrv-scr-cdpa** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED CDPA
SR   REF  RULES
IEC  YES   2
WRD2 YES   1
WRD4 YES   9
```

If the screening reference names that you wish to add with this procedure are not shown in the **rtrv-scr-cdpa** command output, go to step 4. For this example, the screening reference names are not shown. If these screening reference names are shown in the **rtrv-scr-cdpa** command output, make sure the screening data you wish to enter is not already in the database by entering the **rtrv-scr-cdpa** command with the screening reference name. For example, enter the **rtrv-scr-cdpa:sr=iec** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED CDPA
SR   NI      NC      NCM      SSN      SCMGFID  NSFI      NSR/ACT
IEC  240     001     010     012     -----  STOP     -----
SR   ZONE   AREA   ID      SSN      SCMGFID  NSFI      NSR/ACT
IEC  1       134   *      001     002     AFTPC    IEC
```

If a gateway screening stop action set is to be assigned to the allowed CDPA screen being added to the database, go to step 4.

Step 4 verifies the gateway screening stop action set names in the database. The gateway screening stop action set names are assigned only if the NSFI of the screen being added in this procedure is STOP. If the NSFI of the new screen will be STOP, but a gateway screening stop action set name will not be assigned to the new screen, skip steps 4 and 5 and go to step 6. If the NSFI of the new screen is AFTPC, skip step 4 and go to step 5.

4. Display the gateway screening stop action sets in the database with the **rtrv-gws-actset** command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
ACT  ACT
ID   NAME  1    2    3    4    5    6    7    8    9    10
--   ---  ---  ---  ---  ---  ---  ---  ---  ---  ---  ---
1    copy  copy
2    rdct  rdct
3    cr    copy rdct
4    cnf   cnf
5    cpcnf copy cnf
6    cnf   rdct
7    cpcnf copy cnf rdct
```

GWS action set table is (7 of 16) 44% full

If the required gateway screening stop action set is not in the database, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure to configure the required gateway screening stop action set.

NOTE: If the NSFI of the screen being added in this procedure is STOP, skip step 5 and go to step 6.

5. Enter the **rtrv-scr-aftpc** command to verify that the screen that will be specified by the NSFI/NSR parameter combination in step 7 is in the database.

If the desired screen is not in the database, perform one of these procedures to add the desired screen to the database or change an existing screen in the database.

- [Adding an Allowed Affected Point Code Screen](#)

- [Changing an Allowed Affected Point Code Screen](#) .

NOTE: If the point code being added in this procedure is not an ITU-I or 14-bit ITU-N spare point code, skip step 6 and to step 7.

NOTE: If the point code being added in this procedure is an ITU-I or 14-bit ITU-N spare point code and the screening reference contains ITU-I or 14-bit ITU-N spare point codes, skip step 6 and go to step 7.

6. Display the status of the ITU National and International Spare Point Code Support feature by entering the **rtrv-ctrl-feat** command with the ITU National and International Spare Point Code Support feature part number.

Enter this command.

```
rtrv-ctrl-feat:partnum=893013601
```

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
The following features have been permanently enabled:
```

Feature Name	Partnum	Status	Quantity
Spare Point Code Support	893013601	on	----

The following features have been temporarily enabled:

Feature Name	Partnum	Status	Quantity	Trial Period Left
Zero entries found.				

The following features have expired temporary keys:

Feature Name	Partnum
Zero entries found.	

If the ITU National and International Spare Point Code Support feature is enabled, go to step 7.

If the ITU National and International Spare Point Code Support feature is not enabled, perform the “Activating the ITU National and International Spare Point Code Support Feature” procedure in the *Database Administration Manual - SS7* to enable the ITU National and International Spare Point Code Support feature as required. After the feature has been enabled, go to step 7.

7. Add a new allowed CDPA screen to the database using the **ent-scr-cdpa** command.

If a gateway screening stop action is to be assigned to the allowed CDPA screen being added to the database, enter the **ent-scr-cdpa** command with the **nsfi=stop** parameter and the **actname** parameter with the name of a gateway screening stop action set shown in the output of the **rtrv-gws-actset** command executed in step 4.



CAUTION: The EAGLE 5 ISS does not support redirecting MSUs for the DTA feature or intercepting ISUP IAM messages for the Calling Name Conversion Facility feature from the allowed CDPA screen. Gateway screening stop action sets containing either the RDCT (redirect) or CNCF (calling name conversion facility) stop actions should not be assigned to the allowed CDPA screen. If a gateway screening stop action set containing the RDCT or CNCF stop actions is specified with the ent-scr-cdpa command, unsolicited information message (UIM) 1125 is generated when the attempt is made to redirect MSUs from the allowed CDPA screen. Unsolicited information message (UIM) 1215 is generated when ISUP IAM MSUs are intercepted from the allowed CDPA screen. For more information on UIMs 1125 and 1215, go to the *Maintenance Manual*.

The following list contains the values for **ni**, **nc**, **ncm**, **zone**, **area**, **id**, **npc**, **msa**, **ssa**, **sp**, **ssn**, and **scmgfid** parameters:

- ni – 0 - 255 or an asterisk (*)
- nc – 0 - 255 or an asterisk (*)
- ncm – 0 - 255 or an asterisk (*)
- zone – 0 - 7 or an asterisk (*)
- area – 0 - 255 or an asterisk (*)
- id – 0 - 7 or an asterisk (*)
- npc – 1 - 16383 or an asterisk (*)
- msa – 0 - 255 or an asterisk (*)
- ssa – 0 - 255 or an asterisk (*)
- sp – 0 - 255 or an asterisk (*)
- ssn – 0 - 255 or an asterisk (*)
- scmgfid – 1 - 255 or an asterisk (*)

NOTE: The **scmgfid**, **ssn**, **nsfi**, and **nsr** parameters can be specified only as shown in [Table 4-5](#) .

Table 4-5. CDPA Parameter Combinations

SSN	SCMGFID	NSFI	NSR
1	1 - 255, *	AFTPC	Must be specified
0, 2-255, *	Cannot be specified	STOP	Cannot be specified

A range of values can be specified for the **ni**, **nc**, and **ncm** parameters. See the [“Specifying a Range of Values”](#) section for more information on how the asterisk and a range of values are used for the **ni**, **nc**, and **ncm** parameters.

To add a spare point code to the allowed CDPA screen, the **pcst=s** parameter must be specified. To add a non-spare point code to the allowed CDPA screen, the **pcst** parameter does not have to be specified. If the **pcst** parameter is specified for a screen containing an ITU-I or 14-bit ITU-N non-spare point code, the value must be **none**.

For this example, enter these commands.

```
ent-scr-cdpa:sr=gw15:zone=5:area=117:id=2:ssn=254:nsfi=stop
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
ENT-SCR-CDPA: SCREEN SET AFFECTED - GW15 1% FULL
ENT-SCR-CDPA: MASP A - COMPLTD
```

```
ent-scr-
```

```
cdpa:sr=gw17:ni=003:nc=003:ncm=003:ssn=001:scmgfid=050 :nsfi=aftpc:nsr=
gw20
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:29:30 GMT EAGLE5 36.0.0
ENT-SCR-CDPA: SCREEN SET AFFECTED - GW17 1% FULL
ENT-SCR-CDPA: MASP A - COMPLTD
```

```
ent-scr-cdpa:sr=gw18:ni=006:nc=006:ncm=006:ssn=253:nsfi=stop
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:30:30 GMT EAGLE5 36.0.0
ENT-SCR-CDPA: SCREEN SET AFFECTED - GW18 1% FULL
ENT-SCR-CDPA: MASP A - COMPLTD
```

ent-scr-

cdpa:sr=ls03:ni=007:nc=007:ncm=007:ssn=001:scmgfid=100 :nsfi=aftpc:nsr=ls04

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:31:30 GMT EAGLE5 36.0.0
ENT-SCR-CDPA: SCREEN SET AFFECTED - LS03 1% FULL
ENT-SCR-CDPA: MASP A - COMPLTD
```

8. Verify the changes using the **rtrv-scr-cdpa** command with the screening reference name used in step 7.

For this example, enter these commands.

rtrv-scr-cdpa:sr=gw15

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:32:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED CDPA
SR      ZONE  AREA  ID      SSN      SCMGFID  NSFI    NSR/ACT
GW15    5       117   2       254      -----  STOP    -----
```

rtrv-scr-cdpa:sr=gw17

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:33:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED CDPA
SR      NI      NC      NCM      SSN      SCMGFID  NSFI    NSR/ACT
GW17    003     003     003     001     050     AFTPC   GW20
```

rtrv-scr-cdpa:sr=gw18

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:34:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED CDPA
SR      NI      NC      NCM      SSN      SCMGFID  NSFI    NSR/ACT
GW18    006     006     006     253     -----  STOP    -----
```

rtrv-scr-cdpa:sr=ls03

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:35:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED CDPA
SR      NI      NC      NCM      SSN      SCMGFID  NSFI    NSR/ACT
LS03    007     007     007     001     100     AFTPC   -----
```


9. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.


The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.


```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
```

BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
 BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
 BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.

Flowchart 4-2. Adding an Allowed Called Party Address Screen

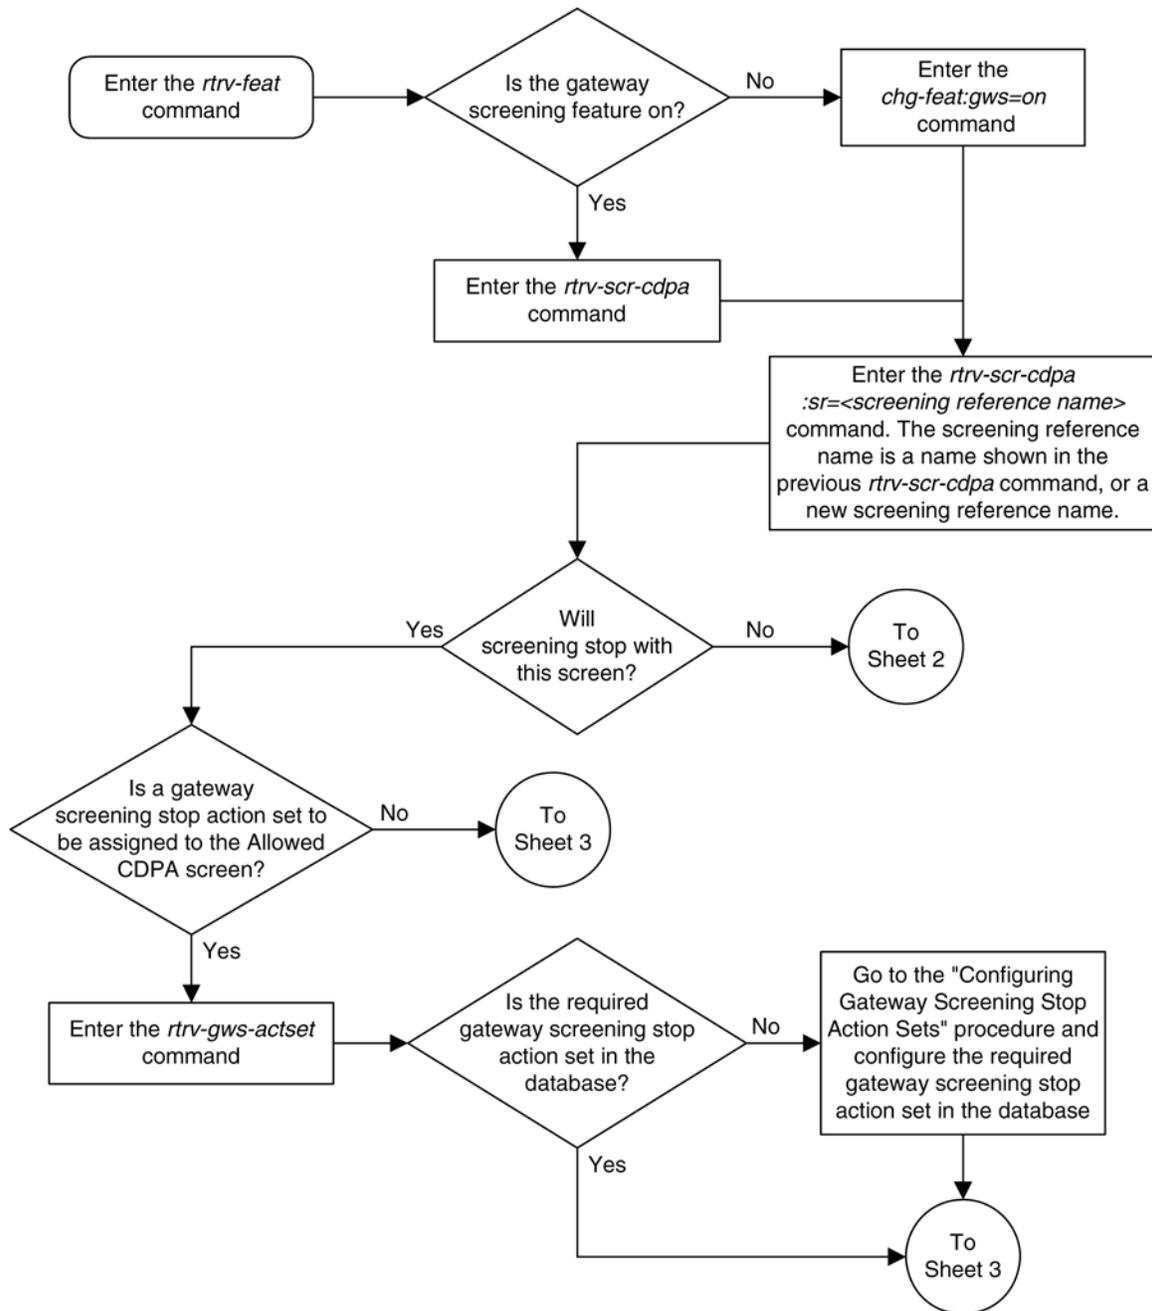

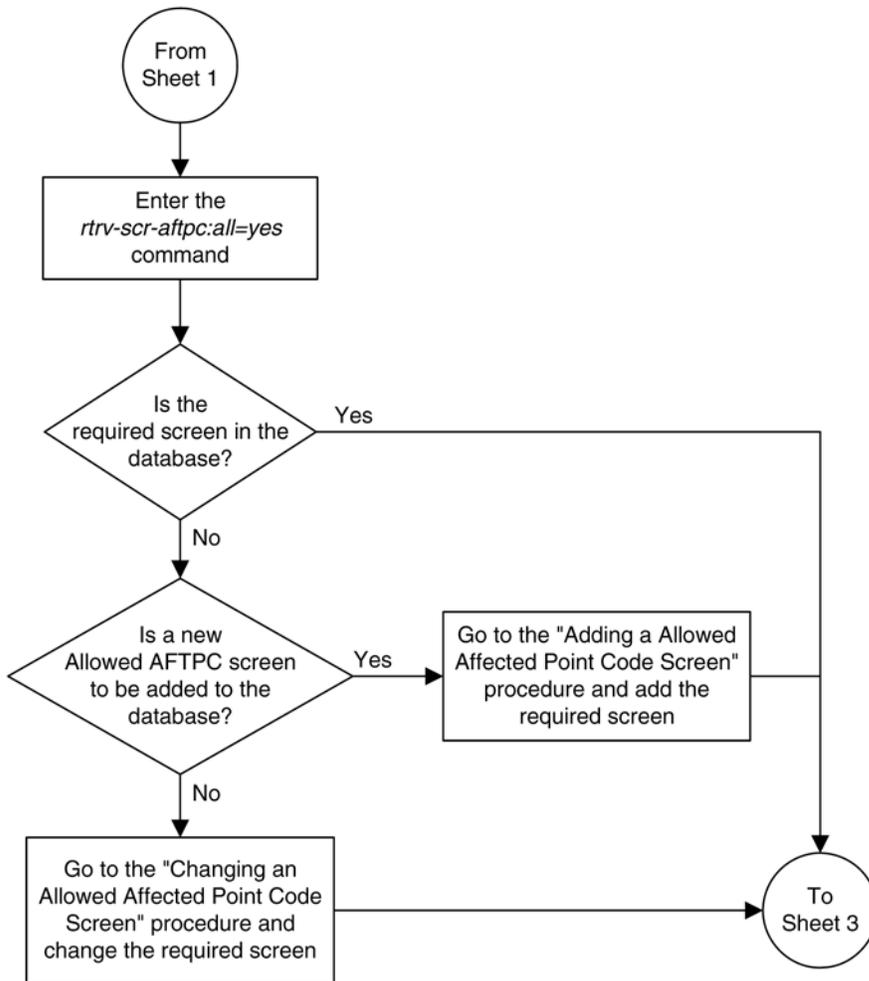

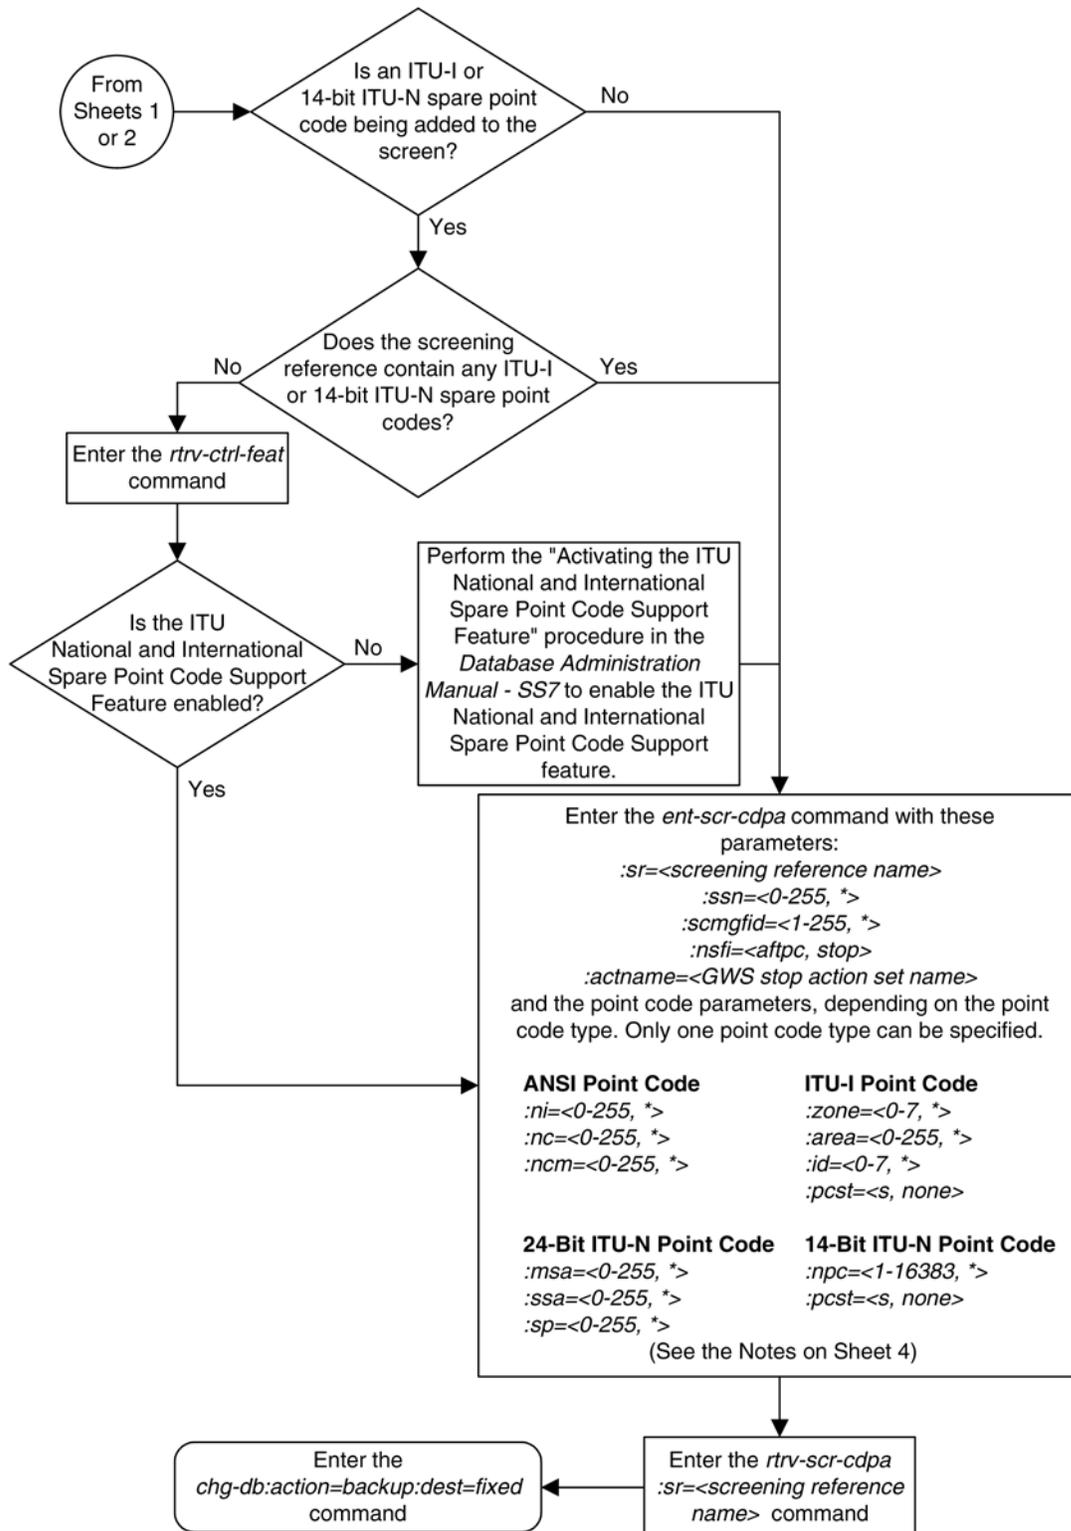

Notes:

1. A range of values can be specified for the *ni*, *nc*, or *ncm* parameters by inserting double ampersands (&&) between the parameter values defining the range. For example, to specify the range 025 to 200 for the *ni* parameter, enter 025&&200 for the *ni* parameter value.
 2. The asterisk (*) specifies the entire range of values for that parameter.
- For more information about specifying a range of values and about using the asterisk, see the "Gateway Screening Attributes" section in Chapter 2 and the "Specifying a Range of Values" section in this procedure.
3. The *scmgfid* parameter can be specified only if the *ssn=1* parameter is specified. If either the *ssn=1* or *scmgfid* parameter is specified, the other parameter must be specified. The *scmgfid* parameter cannot be specified if the *ssn* parameter value is 2 through 255, or *.
 4. To specify the *nsfi=afpc* parameter, the *ssn* parameter value must be 1.
 5. If the *ssn* parameter value is 2 through 255, or *, the *nsfi* parameter value must be *stop*.
 6. If the *ssn* parameter value is 1, the *nsfi* parameter value can be *afpc* or *stop*.
 7. The *nsr* parameter can be specified only, and must be specified, if the *nsfi=afpc* parameter is specified.
 8. The *actname* parameter can be specified only if the *nsfi=stop* parameter is specified. The *actname* parameter is optional. If the *actname* parameter is specified, the *actname* parameter value is one of the gateway screening stop action set names shown in the *rtrv-gws-actset* output on Sheet 1.
 9. To add a non-spare point code, the *pcst* parameter does not have to be specified. If the *pcst* parameter is specified for a screen containing an ITU-I or 14-bit ITU-N non-spare point code, the value must be *none*.
 10. To add a spare point code, the *pcst=s* parameter must be specified.

Removing an Allowed Called Party Address Screen

This procedure is used to remove an allowed called party address (CDPA) screen from the database using the **dlt-scr-cdpa** command. The parameters used by the **dlt-scr-cdpa** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The example in this procedure removes the allowed CDPA screen **gw17** from the database.

NOTE: If you using multiple-part ITU national point codes with gateway screening, see the [14-Bit ITU National Point Code Formats](#) section.

The allowed CDPA screen can be referenced by one of the following screens.

- Allowed SIO
- Allowed CGPA
- Allowed TT

Verifying the Gateway Screening Configuration

Enter the following commands to verify that none of these screens reference the allowed CDPA screen being removed from the database.

- **rtrv-scr-sio:nsfi=cdpa**
- **rtrv-scr-cgpa:nsfi=cdpa**
- **rtrv-scr-tt:nsfi=cdpa**

Gateway Screening Configuration Procedures

To change the NSFI of any of these screens, perform one of these procedures.

- [Changing an Allowed Translation Type Screen](#)
- [Changing an Allowed Calling Party Address Screen](#)
- [Changing an Allowed SIO Screen](#)

Procedure

1. Display the allowed CDPA screens in the database using the **rtrv-scr-cdpa** command.

The following is an example of the possible output.

```
r1ghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED CDPA
SR   REF  RULES
GW15 YES   1
GW17 YES   1
GW18 YES   1
IEC  YES   2
LS03 YES   1
WRD2 YES   1
WRD4 YES   9
```

From the **rtrv-scr-cdpa** output, display the allowed CDPA screen you wish to remove using the **rtrv-scr-cdpa** command with the screening reference name. For this example, enter the **rtrv-scr-cdpa:sr=gw17** command. The following is an example of the possible output.

The following is an example of the possible output.

```
r1ghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED CDPA
SR  NI      NC      NCM      SSN      SCMGFID  NSFI      NSR/ACT
GW17 003      003      003      001      050      AFTPC     GW20
```

2. Enter the commands in the [Verifying the Gateway Screening Configuration](#) section to verify that the screen being removed is not referenced by other screens in the database.

If the screen being removed is referenced by other screens, perform the procedures shown in the [Gateway Screening Configuration Procedures](#) section to change the NSFI of those screens to reference other screens or change the NSFI of these screens to STOP.

3. Remove the allowed CDPA screen from the database using the **dlt-scr-cdpa** command.

The current values for the **ni**, **nc**, **ncm**, **zone**, **area**, **id**, **npc**, **msa**, **ssa**, **sp**, **ssn**, and **scmgfid** parameters must be entered exactly as shown in the **rtrv-scr-cdpa** output. If dashes are shown for the **scmgfid** parameter, the **scmgfid** parameter cannot be specified with the **dlt-scr-cdpa** command.

To remove an entry containing either an ITU-I or a 14-bit ITU-N spare point code, the **pcst=s** parameter must be specified with the **dlt-scr-cdpa** command.

To remove an entry containing either an ITU-I or a 14-bit ITU-N non-spare point code, the **pcst** parameter does not have to be specified with the **dlt-scr-cdpa** command. If the **pcst** parameter is specified, the value must be **none**.

For this command, enter this command:

```
dlt-scr-cdpa:sr=gw17:ni=003:nc=003:ncm=003:ssn=001:scmgfid=050
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0  
DLT-SCR-CDPA: SCREEN SET AFFECTED - GW17 0% FULL  
DLT-SCR-CDPA: MASP A - COMPLTD
```

4. Verify the changes using the **rtrv-scr-cdpa** command with the screening reference name used in step 3.

For this example, enter this command.

```
rtrv-scr-cdpa:sr=gw17
```

The following is an example of the possible output.

```
E2573 Cmd Rej: SR or NSR does not reference an existing SR
```


This message shows that the specified screening reference name is not in the database and the action of the **dlt-scr-cdpa** command in step 3 was successful. If the specified screening reference name contained more than one entry when the **dlt-scr-cdpa** command was executed in step 3, the **rtrv-scr-cdpa:sr=** command output would show the remaining entries in the screening reference instead of error message E2573.


5. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.  
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.  
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.  
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 4-3. Removing an Allowed Called Party Address Screen

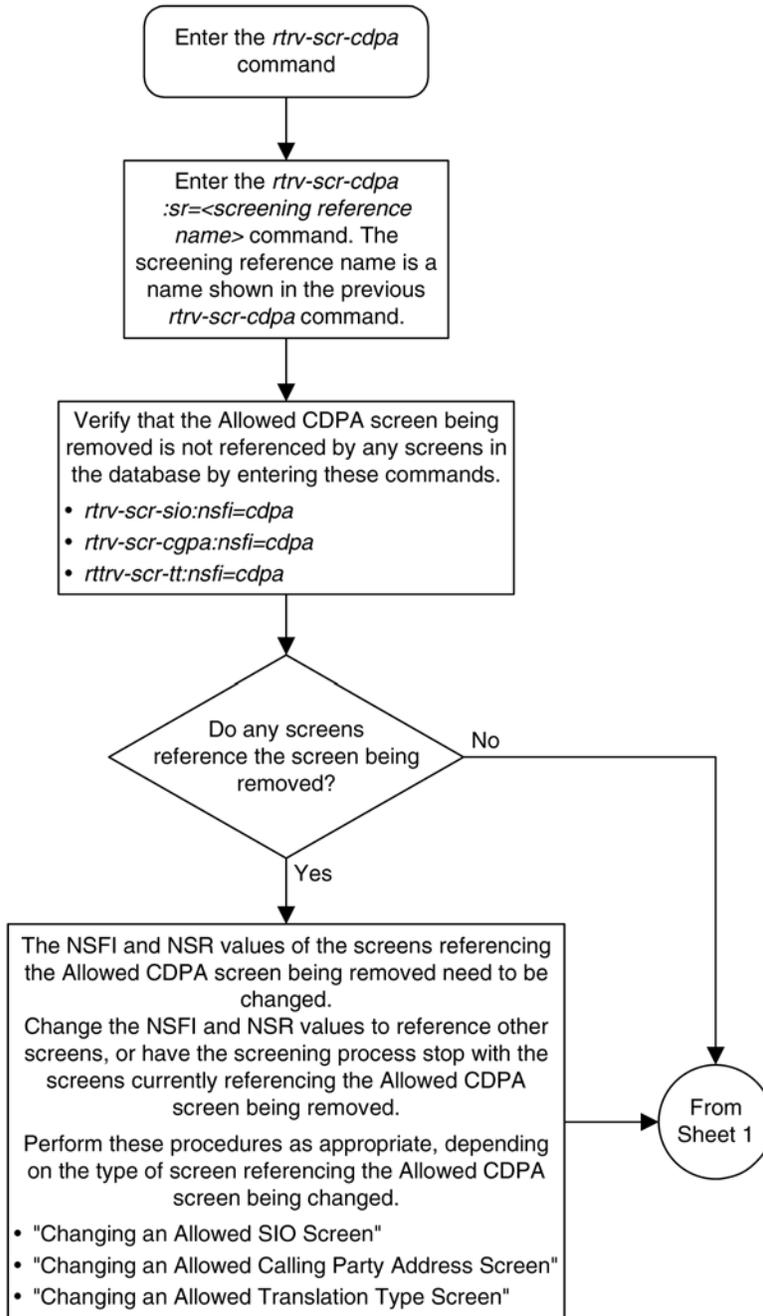

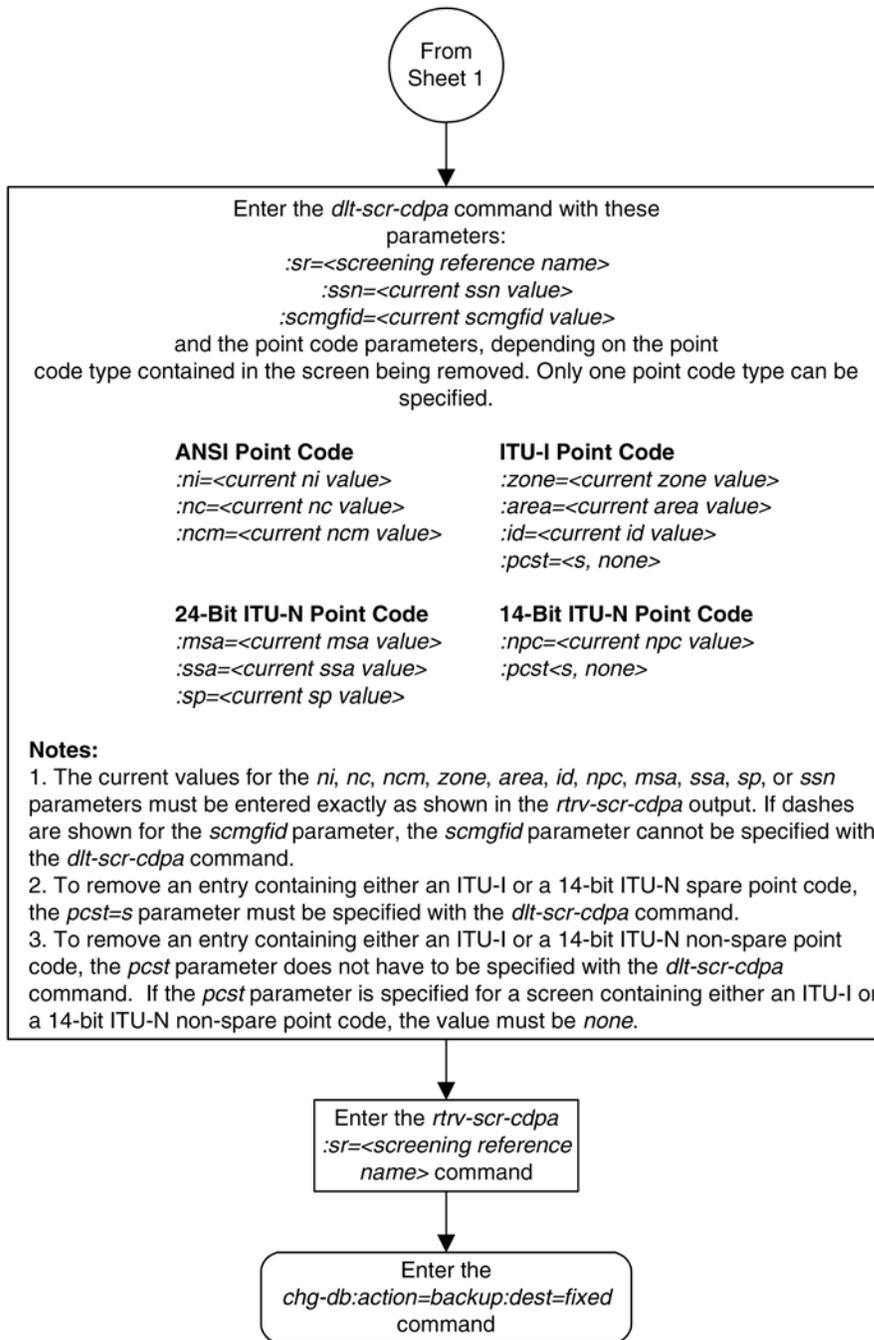

Changing an Allowed Called Party Address Screen

This procedure is used to change the attributes of an allowed called party address (CDPA) screen in the database using the **chg-scr-cdpa** command. The parameters used by the **chg-scr-cdpa** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The example in this procedure is used to change the point code 5-117-2 for the allowed CDPA screen **gw15** to 2-230-7, the subsystem number from 254 to 001, the NSFI to **aftpc**, the NSR of **itu1**, and the new SCMG format ID of 150.

NOTE: If you using multiple-part ITU national point codes with gateway screening, see the [14-Bit ITU National Point Code Formats](#) section.

The allowed CDPA screen can only reference an allowed AFTPC screen. This can be verified using the **rtrv-scr-aftpc:all=yes** command. If the desired allowed AFTPC screen is not in the database, perform one of these procedures to add the required screen to the database or change an existing screen in the database.

- [Adding an Allowed Affected Point Code Screen](#)
- [Changing an Allowed Affected Point Code Screen](#)

Specifying a Range of Values

A range of values can be specified for the point code parameters **ni**, **nc**, or **ncm**.

If a range of values is specified for any of these parameters, and the value of the other parameters match existing values for the screening reference name, the range of values for the point code parameter cannot include any values for that parameter that are currently provisioned for the screening reference name.

For example, screening reference name **scr1** contains these entries:

SR	NI	NC	NCM	SSN	SCMGFID	NSFI	NSR/ACT
SCR1	240	001	010	012	-----	STOP	-----
SCR1	241	010	020	001	002	AFTPC	SCR1

Another entry for screening reference **scr1** with the **ni** value of 240 and the **nc** value of 001 cannot be specified if the range of values for the **ncm** parameter includes the value 010.

The ANSI point code parameter values can be specified as a single value, a range of values, or with an asterisk (*). The asterisk specifies all possible values for the **ni**, **nc**, and **ncm** parameters. [Table 4-6](#) shows the valid combinations of these parameter values.

Table 4-6. Valid Value Combinations for ANSI Point Code Parameters

NI	NC	NCM
Single Value	Single Value	Single Value
Single Value	Single Value	Range of Values
Single Value	Single Value	Asterisk
Single Value	Range of Values	Asterisk
Single Value	Asterisk	Asterisk
Range of Values	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

A range of values can also be specified for an ITU-I or 24-bit ITU-N point code parameter using a combination of asterisks (*) and single values for the point code parameters. [Table 4-7](#) shows the valid combinations of the ITU-I parameter values. [Table 4-8](#) shows the valid combinations of the 24-bit ITU-N parameter values.

Table 4-7. Valid Value Combinations for ITU-I Point Code Parameters

ZONE	AREA	ID
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Table 4-8. Valid Value Combinations for 24-Bit ITU-N Point Code Parameters

MSA	SSA	SP
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Procedure

1. Display the allowed CDPA screens in the database using the **rtrv-scr-cdpa** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED CDPA
SR   REF  RULES
GW15 YES   1
GW17 YES   1
GW18 YES   1
IEC  YES   2
LS03 YES   1
WRD2 YES   1
WRD4 YES   9
```

From the **rtrv-scr-cdpa** output, display the allowed CDPA screen you wish to change using the **rtrv-scr-cdpa** command with the screening reference name. For this example, enter this command.

```
rtrv-scr-cdpa:sr=gw15
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED CDPA
SR   ZONE  AREA  ID      SSN      SCMGFID  NSFI    NSR/ACT
GW15  5      117   2       254     -----  STOP    -----
```

If a gateway screening stop action set is to be assigned to the allowed CDPA screen being changed in this procedure, go to step 2.

Step 2 verifies the gateway screening stop action set names in the database. The gateway screening stop action set names are assigned only if the NSFI of the screen being changed in this procedure is STOP. If the NSFI of the screen will be changed to STOP, but a gateway screening stop action set name will not be

assigned to the screen, skip steps 2 and 3 and go to step 4. If the NSFI of the screen will not be STOP, skip step 2 and go to step 3.

2. Display the gateway screening stop action sets in the database with the `rtrv-gws-actset` command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
ACT ACT
ID NAME 1 2 3 4 5 6 7 8 9 10
--
1 copy copy
2 rdct rdct
3 cr copy rdct
4 cnf cnf
5 cpcnf copy cnf
6 cnf rd cnf rdct
7 cpcrd copy cnf rdct
```

GWS action set table is (7 of 16) 44% full

If the required gateway screening stop action set is not in the database, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure and configure the required gateway screening stop action set.

NOTE: If the NSFI of the screen being added in this procedure is STOP, skip step 3 and go to step 4.

3. Enter the `rtrv-scr-aftpc` command to verify that the screen that will be specified by the NSFI/NSR parameter combination in step 5 is in the database.

If the desired screen is not in the database, perform one of these procedures to add the desired screen to the database or change an existing screen in the database.

- [Adding an Allowed Affected Point Code Screen](#)
- [Changing an Allowed Affected Point Code Screen](#)

NOTE: If any of these conditions apply to this procedure, skip step 4 and go to step 5:

- The point code in the screen is not being changed.
- The screen being changed contains either an ANSI or 24-bit ITU-N point code.
- The ITU-I or 14-bit ITU-N non-spare point code in the screen is not being changed to an ITU-I or 14-bit ITU-N spare point code.
- The point code in the screen is an ITU-I or 14-bit ITU-N spare point code or the screening reference contains other screens with ITU-I or 14-bit ITU-N spare point codes.

4. Display the status of the ITU National and International Spare Point Code Support feature by entering the `rtrv-ctrl-feat` command with the ITU National and International Spare Point Code Support feature part number.

Enter this command.

```
rtrv-ctrl-feat:partnum=893013601
```

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
The following features have been permanently enabled:

Feature Name          Partnum  Status  Quantity
```

Spare Point Code Support 893013601 on ----

The following features have been temporarily enabled:

Feature Name	Partnum	Status	Quantity	Trial Period	Left
Zero entries found.					

The following features have expired temporary keys:

Feature Name	Partnum
Zero entries found.	

If the ITU National and International Spare Point Code Support feature is enabled, go to step 5.

If the ITU National and International Spare Point Code Support feature is not enabled, perform the “Activating the ITU National and International Spare Point Code Support Feature” procedure in the *Database Administration Manual - SS7* to enable the ITU National and International Spare Point Code Support feature as required. After the feature has been enabled, go to step 5.

5. Change the attributes for the allowed CDPA screen using the **chg-scr-cdpa** command.

If a gateway screening stop action is to be assigned to the allowed CDPA screen being changed, enter the **chg-scr-cdpa** command with the **nsfi=stop** parameter and the **actname** parameter with the name of a gateway screening stop action set shown in the output of the **rtrv-gws-actset** command executed in step 2.



CAUTION: The EAGLE 5 ISS does not support redirecting MSUs for the DTA feature or intercepting ISUP IAM messages for the Calling Name Conversion Facility feature from the allowed CDPA screen. Gateway screening stop action sets containing either the RDCT (redirect) or CNCF (calling name conversion facility) stop actions should not be assigned to the allowed CDPA screen. If a gateway screening stop action set containing the RDCT or CNCF stop actions is specified with the chg-scr-cdpa command, unsolicited information message (UIM) 1125 is generated when the attempt is made to redirect MSUs from the allowed CDPA screen. Unsolicited information message (UIM) 1215 is generated when ISUP IAM MSUs are intercepted from the allowed CDPA screen. For more information on UIMs 1125 and 1215, go to the *Maintenance Manual*.

The current values for the **ni**, **nc**, **ncm**, **zone**, **area**, **id**, **npc**, **msa**, **ssa**, and **sp**, **ssn**, and **scmgfid** parameters must be entered exactly as shown in the **rtrv-scr-cdpa** output in step 1. If the **scmgfid** value is shown as dashes, the **scmgfid** parameter cannot be specified.

The following list contains the values for **nni**, **nnc**, **nncm**, **nzone**, **narea**, **nid**, **nnpc**, **nmsa**, **nssa**, **nsp**, **nssn**, and **nscmgfid** parameters:

- **nni** – 0 - 255 or an asterisk (*)
- **nnc** – 0 - 255 or an asterisk (*)
- **nncm** – 0 - 255 or an asterisk (*)
- **nzone** – 0 - 7 or an asterisk (*)
- **narea** – 0 - 255 or an asterisk (*)
- **nid** – 0 - 7 or an asterisk (*)
- **nnpc** – 1 - 16383 or an asterisk (*)
- **nmsa** – 0 - 255 or an asterisk (*)
- **nssa** – 0 - 255 or an asterisk (*)
- **nsp** – 0 - 255 or an asterisk (*)

- nssn – 0 - 255 or an asterisk (*)
- nscmgfid – 1 - 255 or an asterisk (*)

NOTE: The **nsfi=aftpc** parameter can be specified only if the **ssn** value (new or current) is 1. [Table 4-9](#) shows the valid parameter combinations for the **ssn**, **scmgfid**, **nsfi**, and **nsr** parameter values.

Table 4-9. CDPA Parameter Combinations

New or Current SSN Value	New or Current SCMGFID Value	NSFI	NSR
1	1 - 255, *	AFTPC or STOP	Must be specified if NSFI=AFTPC
0, 2-255, *	Cannot be specified	STOP	Cannot be specified

A range of values can be specified for the **nni**, **nnc**, and **nncm** parameters. See the [“Specifying a Range of Values”](#) section for more information on how the asterisk and a range of values are used for the **nni**, **nnc**, and **nncm** parameters.

To change an ITU-I or 14-bit ITU-N spare point code to a non-spare point code, both the **pcst=s** and **npcst=none** parameters must be specified with the **chg-scr-cdpa** command.

To change an ITU-I or 14-bit ITU-N non-spare point code to a spare point code, the **npcst=s** parameter must be specified with the **chg-scr-cdpa** command. The **pcst** parameter does not have to be specified.

If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N spare point code, the **pcst=s** parameter must be specified with the **chg-scr-cdpa** command.

If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N non-spare point code, the **pcst** parameter does not have to be specified with the **chg-scr-cdpa** command. If the **pcst** parameter is specified for a screen containing either an ITU-I or 14-bit ITU-N non-spare point code, the **pcst** parameter value must be **none**.

For this example, enter this command.

```
chg-scr-cdpa:sr=gw15:zone=5:area=117:id=2:ssn=254:nzone=2 :narea=230:nid=7:nssn=001:nscmgfid=150:nsfi=aftpc:nsr=itu1
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
CHG-SCR-CDPA: SCREEN SET AFFECTED - GW15 1% FULL
CHG-SCR-CDPA: MASP A - COMPLTD
```

6. Verify the changes using the **rtrv-scr-cdpa** command with the screening reference name used in step 5.

For this example, enter this command.

```
rtrv-scr-cdpa:sr=gw15
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED CDPA
```

Database Administration Manual - Gateway Screening Changing an Allowed Called Party Address Screen


SR	ZONE	AREA	ID	SSN	SCMGFID	NSFI	NSR/ACT
GW15	2	230	7	001	150	AFTPC	ITU1


7. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.


The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.


```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.  
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.  
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.  
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 4-4. Changing an Allowed Called Party Address Screen

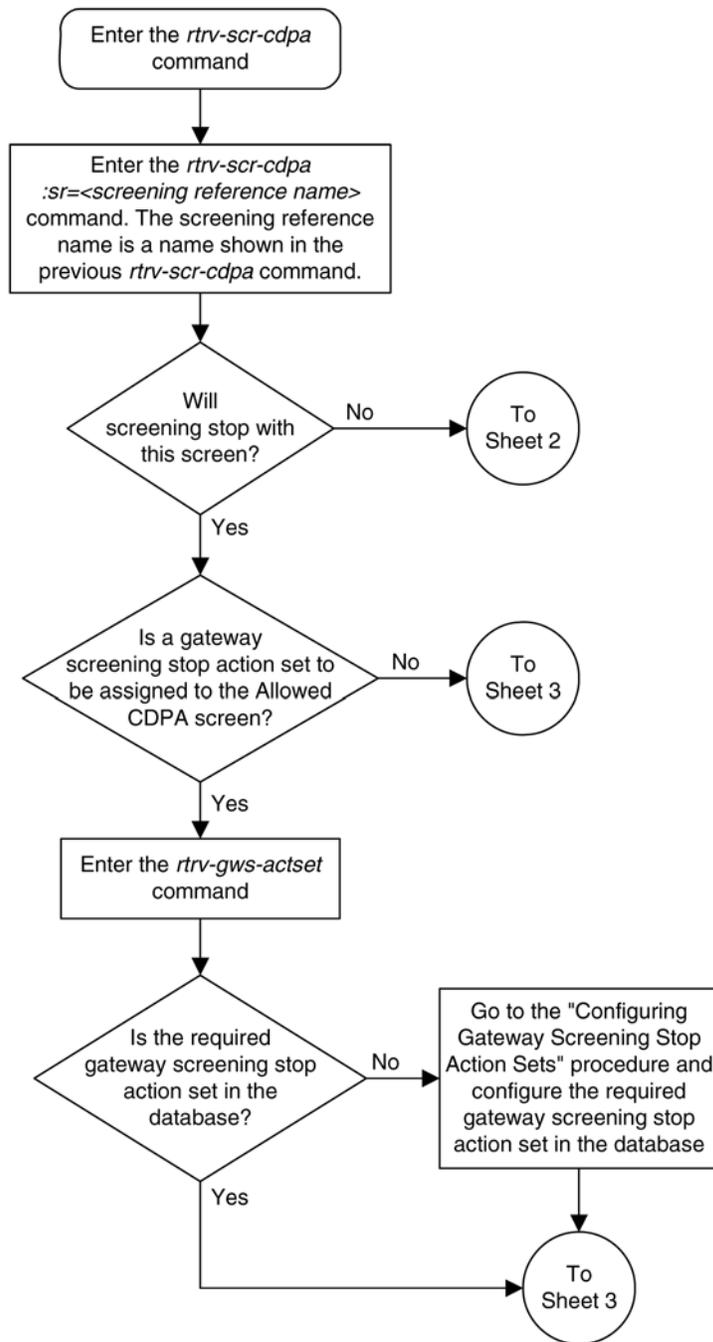

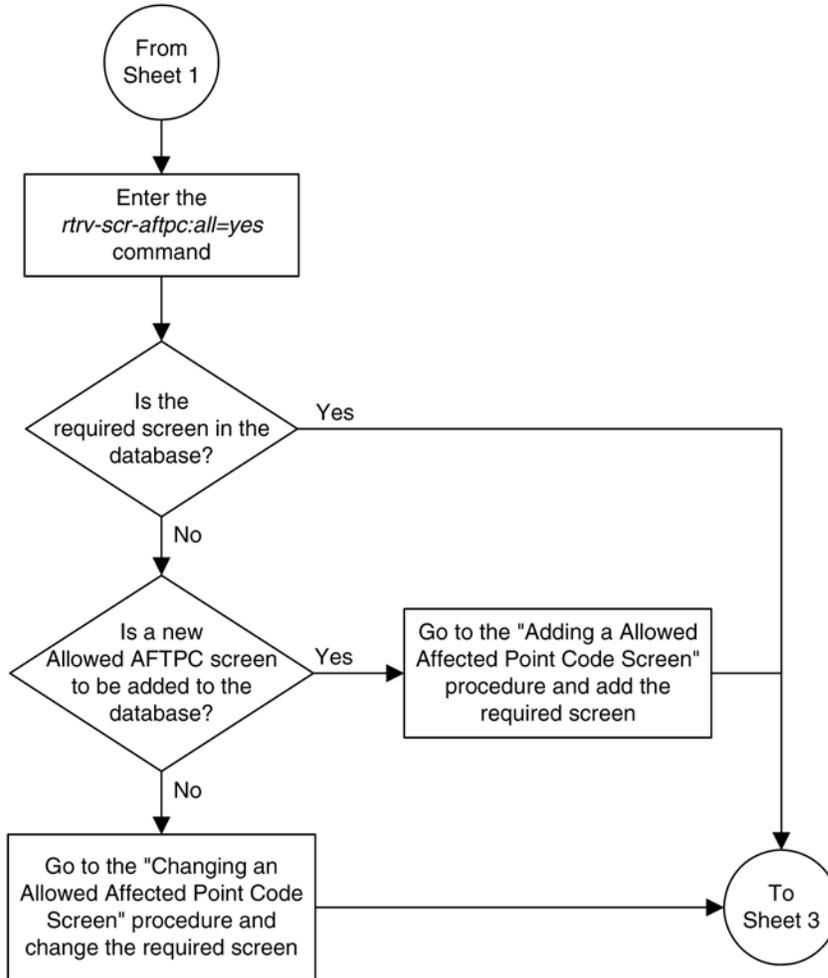

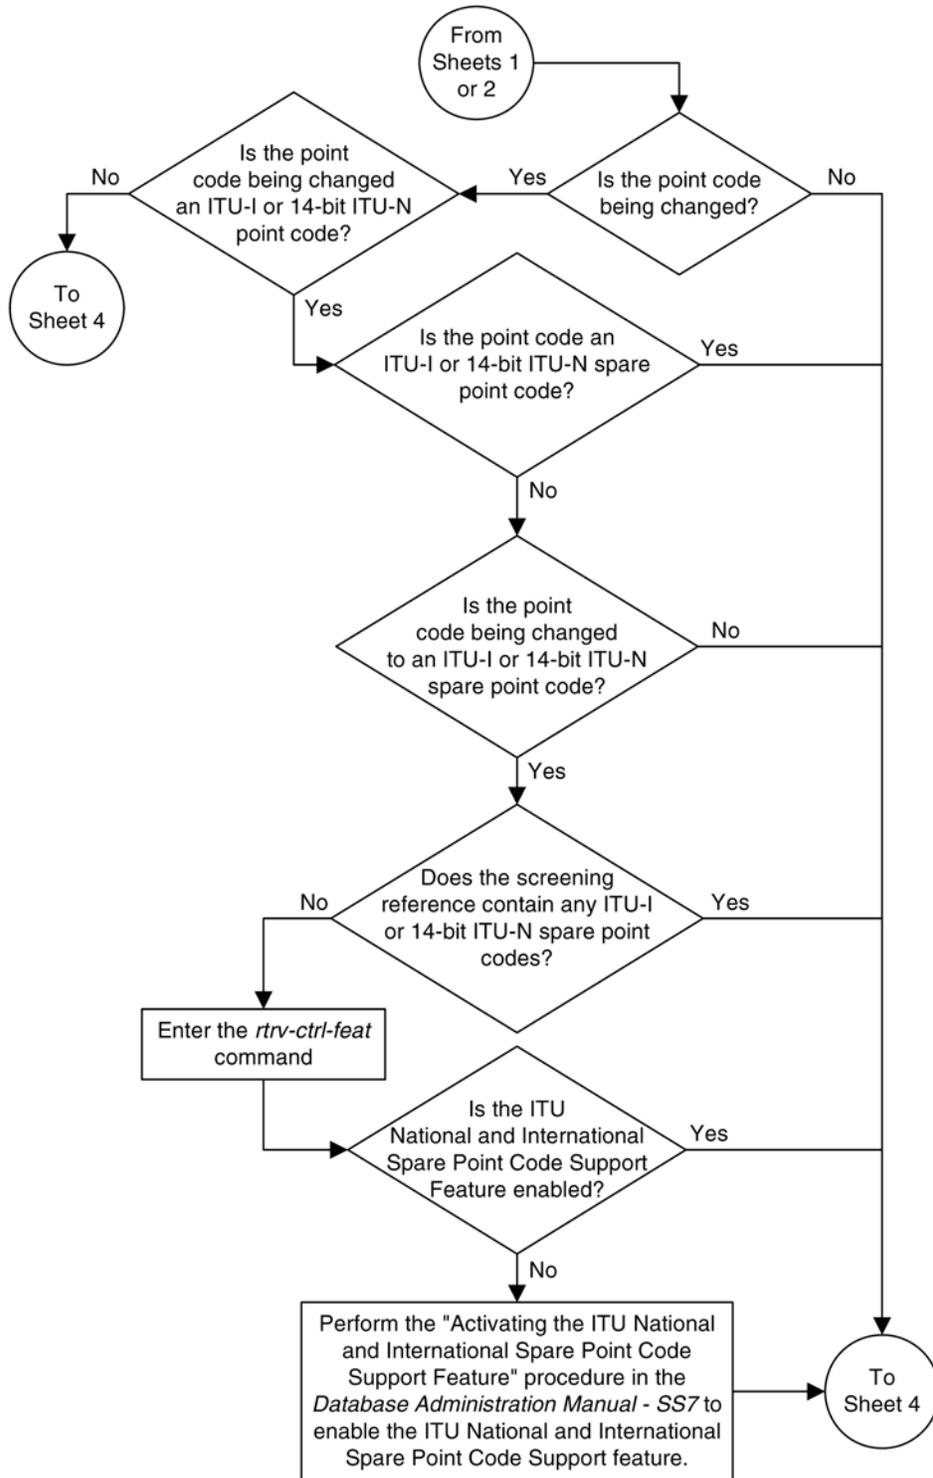



Enter the *chg-scr-cdpa* command with these mandatory parameters:

```

:sr=<screening reference name>
:ssn=<current ssn value>
:scmgfid=<current scmgfid value>
    
```

and the point code parameters, depending on the point code type contained in the screen being changed. Only one point code type can be specified.

ANSI Point Code	ITU-I Point Code	14-Bit ITU-N Point Code	24-Bit ITU-N Point Code
:ni=<current ni value>	:zone=<current zone value>	:npc=<current npc value>	:msa=<current msa value>
:nc=<current nc value>	:area=<current area value>	:pcst=<s, none>	:ssa=<current ssa value>
:ncm=<current ncm value>	:id=<current id value>		:sp=<current sp value>
	:pcst=<s, none>		

At least one of these optional parameters must be specified with the *chg-scr-cdpa* command.

```

:nssn=<0-255, *>
:nscmgfid=<1-255, *>
:nspi=<aftpc, stop>
:nsr=<next screening reference>
:actname=<GWS stop action set name>
    
```

If the new point code code parameters are specified, they must be of the same type as the current point code values specified in the *chg-scr-cdpa* command.

ANSI Point Code	ITU-I Point Code	14-Bit ITU-N Point Code	24-Bit ITU-N Point Code
:nni=<0-255, *>	:nzone=<0-7, *>	:nnpc=<1-16383, *>	:nmsa=<0-255, *>
:nnc=<0-255, *>	:narea=<0-255, *>	:npcst=<s, none>	:nssa=<0-255, *>
:nncm=<0-255, *>	:nid=<0-7, *>		:nsp=<0-255, *>
	:npcst=<s, none>		

(See the Notes on Sheet 5)

Enter the *rtv-scr-cdpa*
:*sr*=<screening reference name> command

Enter the
chg-db:action=backup:dest=fixd
command

Notes:

1. A range of values can be specified for the *nni*, *nnc*, or *nncm* parameters by inserting double ampersands (&&) between the parameter values defining the range. For example, to specify the range 025 to 200 for the *nni* parameter, enter 025&&200 for the *nni* parameter value.
2. The asterisk (*) specifies the entire range of values for that parameter.
For more information about specifying a range of values and about using the asterisk, see the "Gateway Screening Attributes" section in Chapter 2 and the "Specifying a Range of Values" section in this procedure.
3. The *nscmgfid* parameter can be specified only if the *ssn* parameter value (if unchanged) or the *nssn* parameter value is 1. If either the *nssn=1* or *nscmgfid* parameter is specified, the other parameter must be specified. The *nscmgfid* parameter cannot be specified if the *ssn* parameter value is 2 through 255, or *.
4. To specify the *nsfi=atpc* parameter, the *ssn* parameter value (if unchanged) or the *nssn* parameter value must be 1.
5. If the *ssn* parameter value (if unchanged) or the *nssn* parameter value is 2 through 255, or *, the *nsfi* parameter value must be *stop*.
6. If the *ssn* parameter value (if unchanged) or the *nssn* parameter value is 1, the *nsfi* parameter value can be either *atpc* or *stop*.
7. The *nsr* parameter can be specified only, and must be specified, if the *nsfi=atpc* parameter is specified.
8. The *actname* parameter can be specified only if the *nsfi* value is *stop* (either the current *nsfi* value is *stop* and not being changed, or the *nsfi* value is being changed to *stop*). The *actname* parameter is optional. If the *actname* parameter is specified, the *actname* parameter value is one of the gateway screening stop action set names shown in the *rtrv-gws-actset* output on Sheet 1.
9. The current values for the *ni*, *nc*, *nncm*, *zone*, *area*, *id*, *npc*, *msa*, *ssa*, *sp*, or *ssn* parameters must be entered exactly as shown in the *rtrv-scr-cdpa* output. If dashes are shown for the *scmgfid* parameter, the *scmgfid* parameter cannot be specified with the *chg-scr-cdpa* command.
10. To change an ITU-I or 14-bit ITU-N spare point code to a non-spare point code, both the *pcst=s* and *npcst=none* parameters must be specified with the *chg-scr-cdpa* command.
11. To change an ITU-I or 14-bit ITU-N non-spare point code to a spare point code, the *npcst=s* parameter must be specified with the *chg-scr-cdpa* command. The *pcst* parameter does not have to be specified.
12. If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N spare point code, the *pcst=s* parameter must be specified with the *chg-scr-cdpa* command.
13. If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N non-spare point code, the *pcst* parameter does not have to be specified with the *chg-scr-cdpa* command. If the *pcst* parameter is specified for a screen containing either an ITU-I or 14-bit ITU-N non-spare point code, the *pcst* parameter value must be *none*.

Allowed Translation Type (TT) Screen Configuration

Introduction	5-1
Adding an Allowed Translation Type Screen	5-4
Removing an Allowed Translation Type Screen	5-10
Changing an Allowed Translation Type Screen	5-12

Introduction

The allowed translation type (TT) screen is used to screen all SCCP messages which have the specified translation type value in the called party address. The gray shaded areas in [Figure 5-1](#) shows the fields of the SS7 message that are checked by the TT screening function. If a match is found, the **nsfi** is examined to determine the next step in the screening process. If the **nsfi** is equal to **stop**, the message is processed and no further screening takes place.

If the **nsfi** is equal to **stop**, and the **copy** gateway screening stop action is specified, the message is processed and a copy of the message is sent by the STPLAN feature to an external application.

If the **nsfi** is equal to anything else, the next screening reference (**nsr**) is identified and the screening process continues to the next screen identified by the **nsfi** and **nsr** parameters. If no match is found, the message is discarded.

[Flowchart 5-16](#) shows the screening action of the allowed TT screen.

Flowchart 5-1. Allowed TT Screening Action

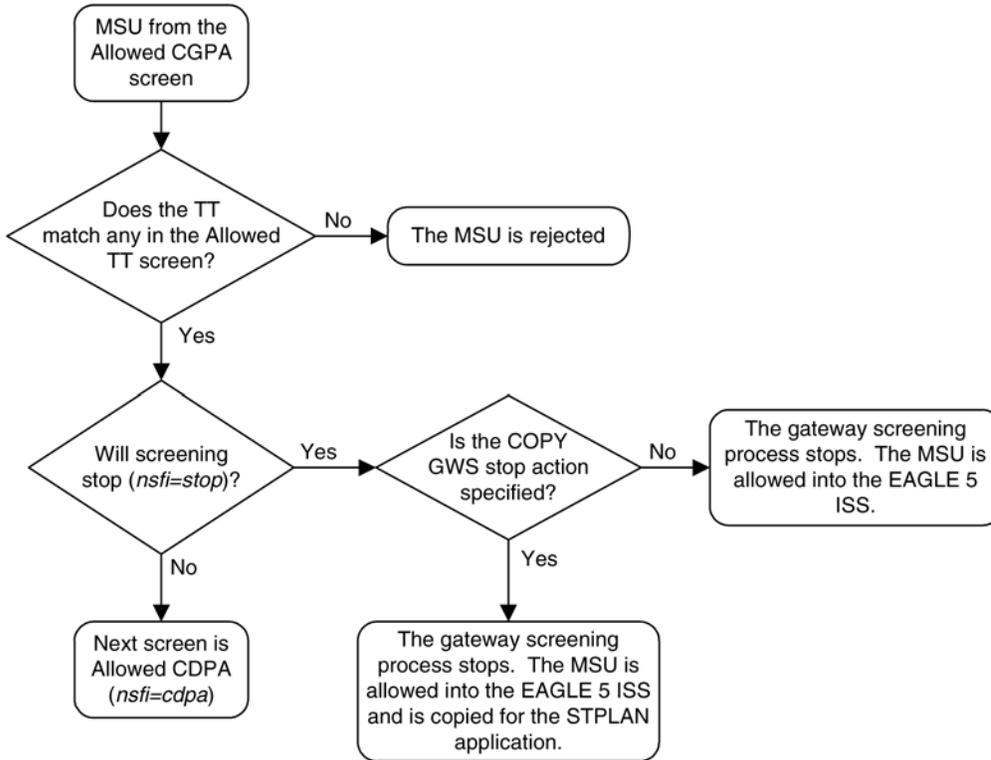


Figure 5-1. Allowed Translation Type Screening Function

ANSI MSU (ANSI Message Signal Unit)						
BSN FSN LI	SIO xx xx xxxx NIC PRI SI	SIF				
		DPC NCM NC NI	Routing Label OPC NCM NC NI	SLS xx	CGPA Length Address Indicator Subsystem Point Code (NCM NC NI)	CDPA Length Address Indicator (x x xxxx xx) (x RI xxxx xx) Subsystem Point Code (NCM NC NI) Address (Translation Type) (Digits)
ITU-I MSU (ITU International Message Signal Unit)						
BSN FSN LI	SIO xx xx xxxx NIC PRI SI	SIF				
		DPC ID AREA ZONE	Routing Label OPC ID AREA ZONE	SLS xx	CGPA Length Address Indicator Subsystem Point Code (ID AREA ZONE)	CDPA Length Address Indicator (x x xxxx xx) (x RI xxxx xx) Subsystem Point Code (ID AREA ZONE) Address (Translation Type) (Digits)
14-Bit ITU-N MSU (14-Bit ITU National Message Signal Unit)						
BSN FSN LI	SIO xx xx xxxx NIC PRI SI	SIF				
		DPC NPC	Routing Label OPC NPC	SLS xx	CGPA Length Address Indicator Subsystem Point Code (NPC)	CDPA Length Address Indicator (x x xxxx xx) (x RI xxxx xx) Subsystem Point Code (NPC) Address (Translation Type) (Digits)
24-Bit ITU-N MSU (24-Bit ITU National Message Signal Unit)						
BSN FSN LI	SIO xx xx xxxx NIC PRI SI	SIF				
		DPC SP SSA MSA	Routing Label OPC SP SSA MSA	SLS xx	CGPA Length Address Indicator Subsystem Point Code (SP SSA MSA)	CDPA Length Address Indicator (x x xxxx xx) (x RI xxxx xx) Subsystem Point Code (SP SSA MSA) Address (Translation Type) (Digits)

Adding an Allowed Translation Type Screen

This procedure is used to add an allowed translation type (TT) screen to the database using the **ent-scr-tt** command. The parameters used by the **ent-scr-tt** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The examples in this procedure are used to add the allowed TT screen data shown in [Table 5-1](#) and based on the example configuration shown in [Figure 2-5](#).

Table 5-1. Example Gateway Screening Allowed TT Configuration Table

Screening Reference	TYPE	NSFI	NSR
gw16	250	cdpa	gw18

The allowed TT screen can only reference an allowed CDPA screen and the allowed CDPA screen being referenced must be in the database. This can be verified using the **rtrv-scr-cdpa:all=yes** command. If the desired allowed CDPA screen is not in the database, perform one of these procedures to add the required screen to the database or change an existing screen in the database.

- [Adding an Allowed Called Party Address Screen](#)
- [Changing an Allowed Called Party Address Screen](#)

Specifying a Range of Values

A range of values can be specified for the **type** parameter. The range of values specified for the **type** parameter cannot include any values currently provisioned for the screen reference name.

For example, screening reference name **scr1** contains these entries:

```
SR  TYPE      NSFI  NSR/ACT
scr1 110      STOP  -----
scr1 125      STOP  -----
```

Another entry for screening reference **scr1** cannot contain a range of values that would include the **type** parameter values 110 or 125.

Procedure

1. Verify that the gateway screening feature is on, by entering the **rtrv-feat** command.

If the gateway screening feature is on, the **GWS** field is set to **on**.

NOTE: The **rtrv-feat command output contains other fields that are not used by this procedure. If you wish to see all the fields displayed by the **rtrv-feat** command, see the **rtrv-feat** command description in the *Commands Manual*.**

If the gateway screening feature is on, shown by the entry **GWS = on** in the **rtrv-feat** command output, skip step 2, and go to step 3.

2. Turn the gateway screening feature on by entering this command.

```
chg-feat:gws=on
```

NOTE: Once the gateway screening feature is turned on with the `chg-feat` command, it cannot be turned off.

The gateway screening feature must be purchased before you turn this feature on with the `chg-feat` command. If you are not sure if you have purchased the gateway screening feature, contact your Tekelec Sales Representative or Account Representative.

When the `chg-feat` has successfully completed, this message should appear.

```
rlghncxa03w 06-10-28 11:43:04 GMT EAGLE5 36.0.0
CHG-FEAT: MASP A - COMPLTD
```

3. Display all allowed TT screens in the database using the `rtrv-scr-tt` command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED TT
SR   REF  RULES
IEC  YES   2
WRD2 YES   1
WRD4 YES   9
```

If the screening reference names that you wish to add with this procedure are not shown in the `rtrv-scr-tt` command output, go to step 4. For this example, the screening reference names are not shown. If these screening reference names are shown in the `rtrv-scr-tt` command output, make sure the screening data you wish to enter is not already in the database by entering the `rtrv-scr-tt` command with the screening reference name. For example, enter the `rtrv-scr-tt:sr=iec` command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED TT
SR   TYPE  NSFI   NSR/ACT
IEC  005&&010 STOP  -----
IEC  012     STOP  -----
IEC  016     CDPA  IEC
WRD2 243     STOP  -----
WRD4 *      STOP  -----
```

If a gateway screening stop action set is to be assigned to the allowed TT screen being added to the database, go to step 4.

Step 4 verifies the gateway screening stop action set names in the database. The gateway screening stop action set names are assigned only if the NSFI of the screen being added in this procedure is STOP. If the NSFI of the new screen will be STOP, but a gateway screening stop action set name will not be assigned to the new screen, skip steps 4 and 5 and go to step 6. If the NSFI of the new screen is CDPA, skip step 4 and go to step 5.

4. Display the gateway screening stop action sets in the database with the `rtrv-gws-actset` command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
ACT ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT
ID  NAME  1   2   3   4   5   6   7   8   9   10
--  ----  -   -   -   -   -   -   -   -   -   -
1   copy  copy
2   rdct  rdct
3   cr    copy rdct
4   cncf  cncf
5   cpcncf copy cncf
6   cncfrd cncf rdct
```

```
7 cpcf rd copy cnf rdct
GWS action set table is (7 of 16) 44% full
```

If the required gateway screening stop action set is not in the database, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure to configure the required gateway screening stop action set.

NOTE: If the NSFI of the screen being added in this procedure is STOP, skip step 5 and go to step 6.

5. Enter the **rtrv-scr-cdpa** command to verify that the screen that will be specified by the NSFI/NSR parameter combination in step 6 is in the database.

If the desired screen is not in the database, perform one of these procedures to add the desired screen to the database or change an existing screen in the database.

- [Adding an Allowed Called Party Address Screen](#)
- [Changing an Allowed Called Party Address Screen](#) .

6. Add a new allowed TT screen to the database using the **ent-scr-tt** command.

If a gateway screening stop action is to be assigned to the allowed TT screen being changed, enter the **ent-scr-tt** command with the **nsfi=stop** parameter and the **actname** parameter with the name of a gateway screening stop action set shown in the output of the **rtrv-gws-actset** command executed in step 4.



CAUTION: The EAGLE 5 ISS does not support redirecting MSUs for the DTA feature or intercepting ISUP IAM messages for the Calling Name Conversion Facility feature from the allowed TT screen. Gateway screening stop action sets containing either the RDCT (redirect) or CNCF (calling name conversion facility) stop actions should not be assigned to the allowed TT screen. If a gateway screening stop action set containing the RDCT or CNCF stop actions is specified with the ent-scr-tt command, unsolicited information message (UIM) 1128 is generated when the attempt is made to redirect MSUs from the allowed TT screen. Unsolicited information message (UIM) 1218 is generated when ISUP IAM MSUs are intercepted from the allowed TT screen. For more information on UIMs 1128 and 1218, go to the *Maintenance Manual*.

The value of the **type** parameter can be from 0 to 255 or an asterisk (*).

A range of values can be specified for the **type** parameter. See the [“Specifying a Range of Values”](#) section for more information on how a range of values is used for the **type** parameter.

For this example, enter this command.

```
ent-scr-tt:sr=gw16:type=250:nsfi=cdpa:nsr=gw18
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
ENT-SCR-TT: SCREEN SET AFFECTED - GW16 1% FULL
ENT-SCR-TT: MASP A - COMPLTD
```

7. Verify the changes using the **rtrv-scr-tt** command with the screening reference name used in step 6.

For this example, enter this command.

```
rtrv-scr-tt:sr=gw16
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:29:30 GMT EAGLE5 36.0.0
```


```
SCREEN = ALLOWED TT
SR      TYPE      NSFI   NSR/ACT
GW16   250        CDPA   GW18
```


8. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.


The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 5-2. Adding an Allowed Translation Type Screen

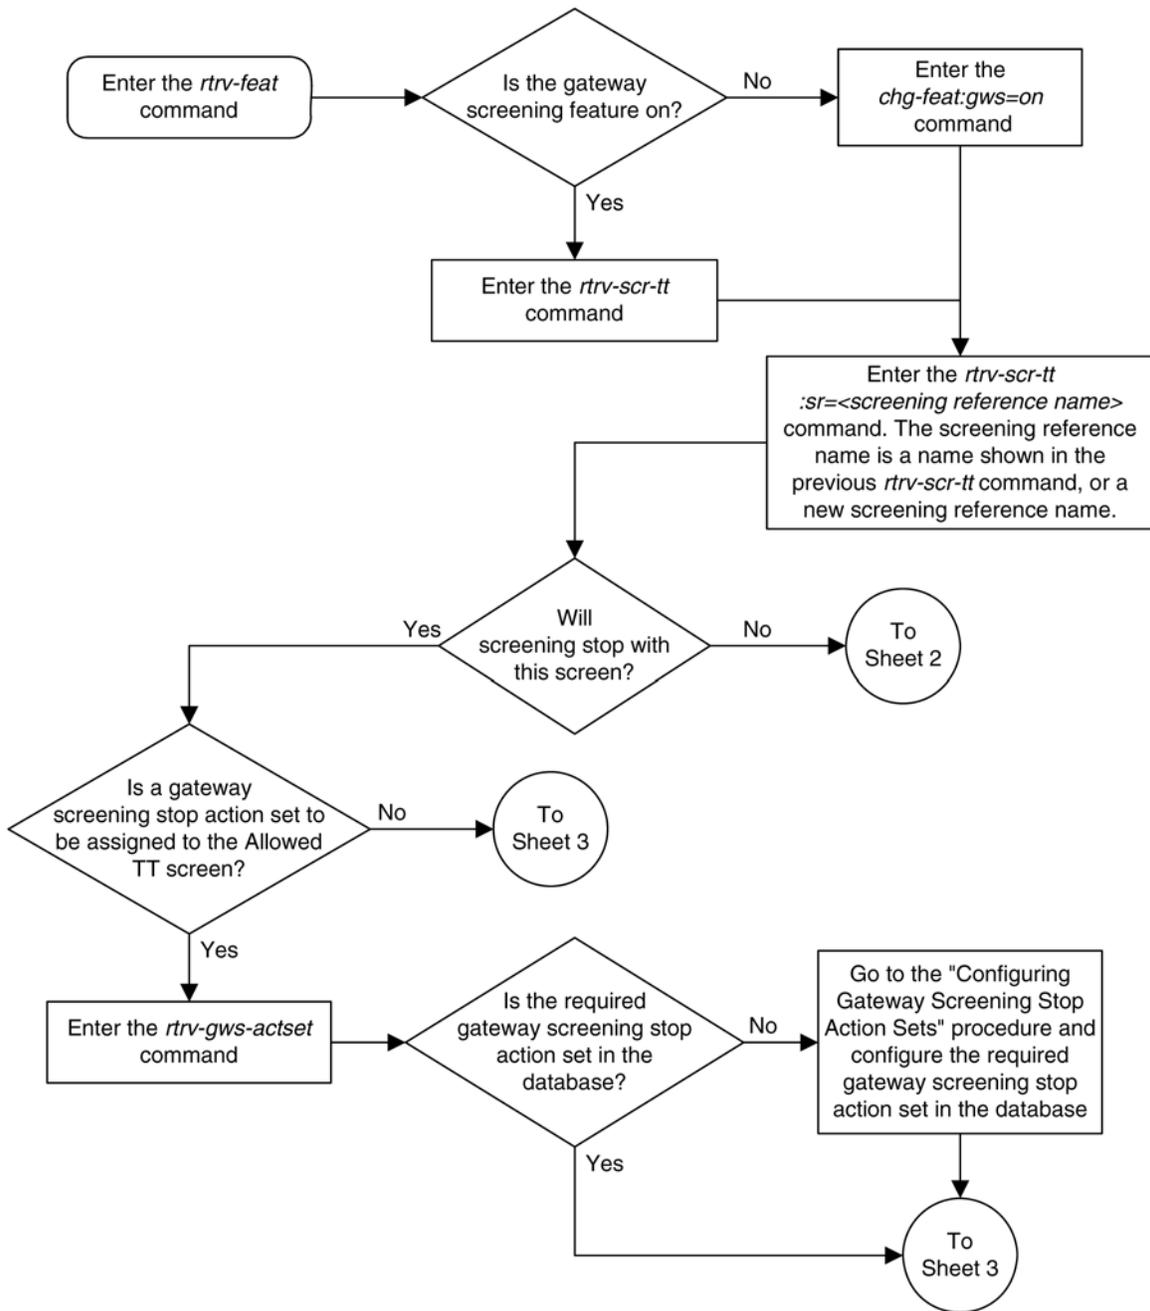

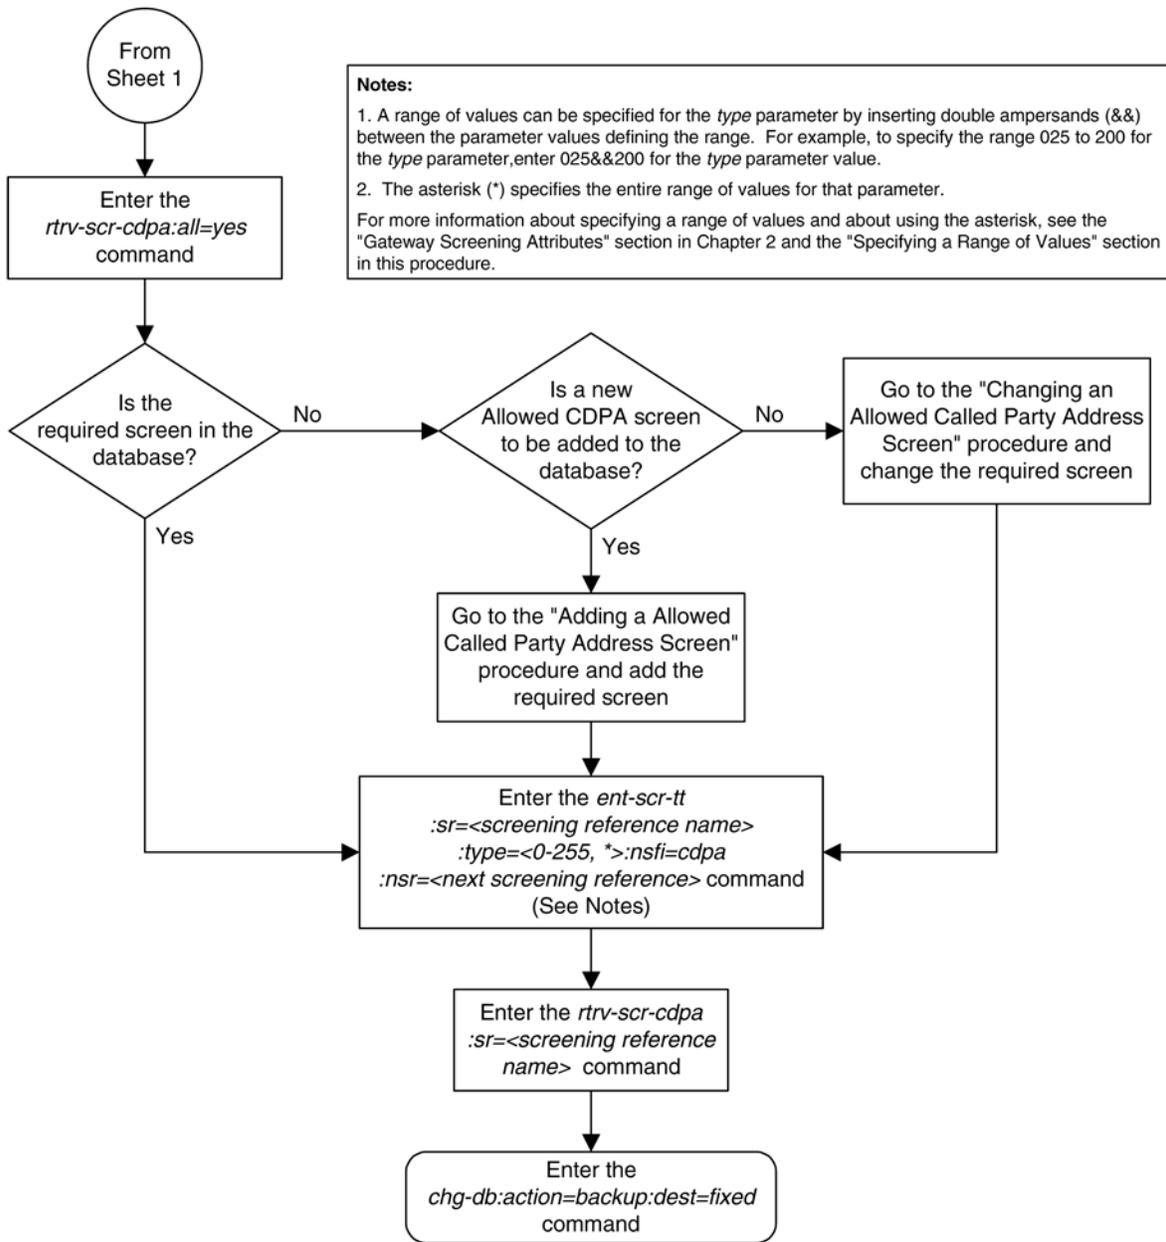

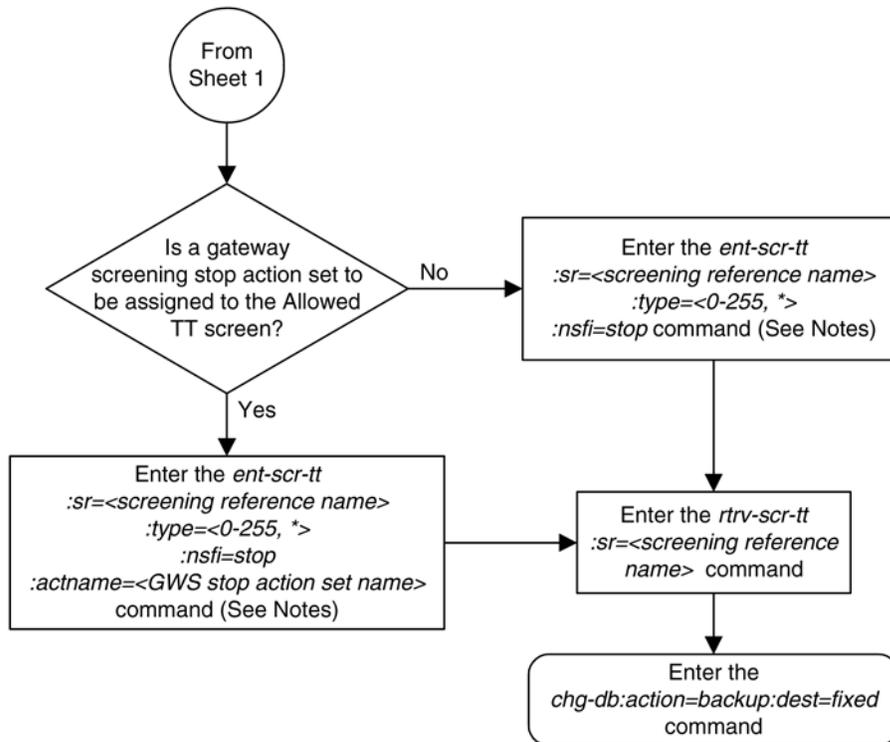

Notes:

1. A range of values can be specified for the *type* parameter by inserting double ampersands (&&) between the parameter values defining the range. For example, to specify the range 025 to 200 for the *type* parameter, enter 025&&200 for the *type* parameter value.
2. The asterisk (*) specifies the entire range of values for that parameter.

For more information about specifying a range of values and about using the asterisk, see the "Gateway Screening Attributes" section in Chapter 2 and the "Specifying a Range of Values" section in this procedure.

Removing an Allowed Translation Type Screen

This procedure is used to remove an allowed translation type (TT) screen from the database using the **dlt-scr-tt** command. The parameters used by the **dlt-scr-tt** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The example in this procedure removes the allowed TT screen **iec**, with the translation type 016 from the database.

The allowed TT screen can be referenced by the Allowed CGPA screen. Enter the **rtrv-scr-cgpa:nsfi=tt** command to verify that this screen does not reference the allowed TT screen being removed from the database.

To change the NSFI of any of these screens, perform the [Changing an Allowed Calling Party Address Screen](#) procedure.

Procedure

1. Display the allowed TT screens in the database using the **rtrv-scr-tt** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED TT
SR   REF  RULES
GW16 YES   1
IEC  YES   3
WRD2 YES   1
WRD4 YES   1
```

From the **rtrv-scr-tt** output, display the allowed TT screen you wish to remove using the **rtrv-scr-tt** command with the screening reference name. For this example, enter the **rtrv-scr-tt:sr=iec** command. The following is an example of the possible output. The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED TT
SR   TYPE  NSFI  NSR/ACT
IEC  005&&010 STOP  -----
IEC  012    STOP  -----
IEC  016    CDPA  IEC
```

2. Enter the **rtrv-scr-cgpa:nsfi=tt** command to verify that the screen being removed is not referenced by other screens in the database.

If the screen being removed is referenced by other screens, perform the [Changing an Allowed Calling Party Address Screen](#) procedure procedure and change the NSFI of those screens to reference other screens or change the NSFI of these screens to STOP.

3. Remove the allowed TT screen from the database using the **dlt-scr-tt** command.

The current value of the **type** parameter must be entered exactly as shown in the **rtrv-scr-tt** output. For this example, enter this command.

```
dlt-scr-tt:sr=iec:type=016
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
DLT-SCR-TT: SCREEN SET AFFECTED - IEC 2% FULL
DLT-SCR-TT: MASP A - COMPLTD
```

4. Verify the changes using the **rtrv-scr-tt** command with the screening reference name used in step 3.

For this example, enter this command.

```
rtrv-scr-tt:sr=iec
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED TT
SR   TYPE  NSFI  NSR/ACT
IEC  005&&010 STOP  -----
IEC  012    STOP  -----
```


5. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
```

BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
 BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
 BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.

Flowchart 5-3. Removing an Allowed Translation Type Screen

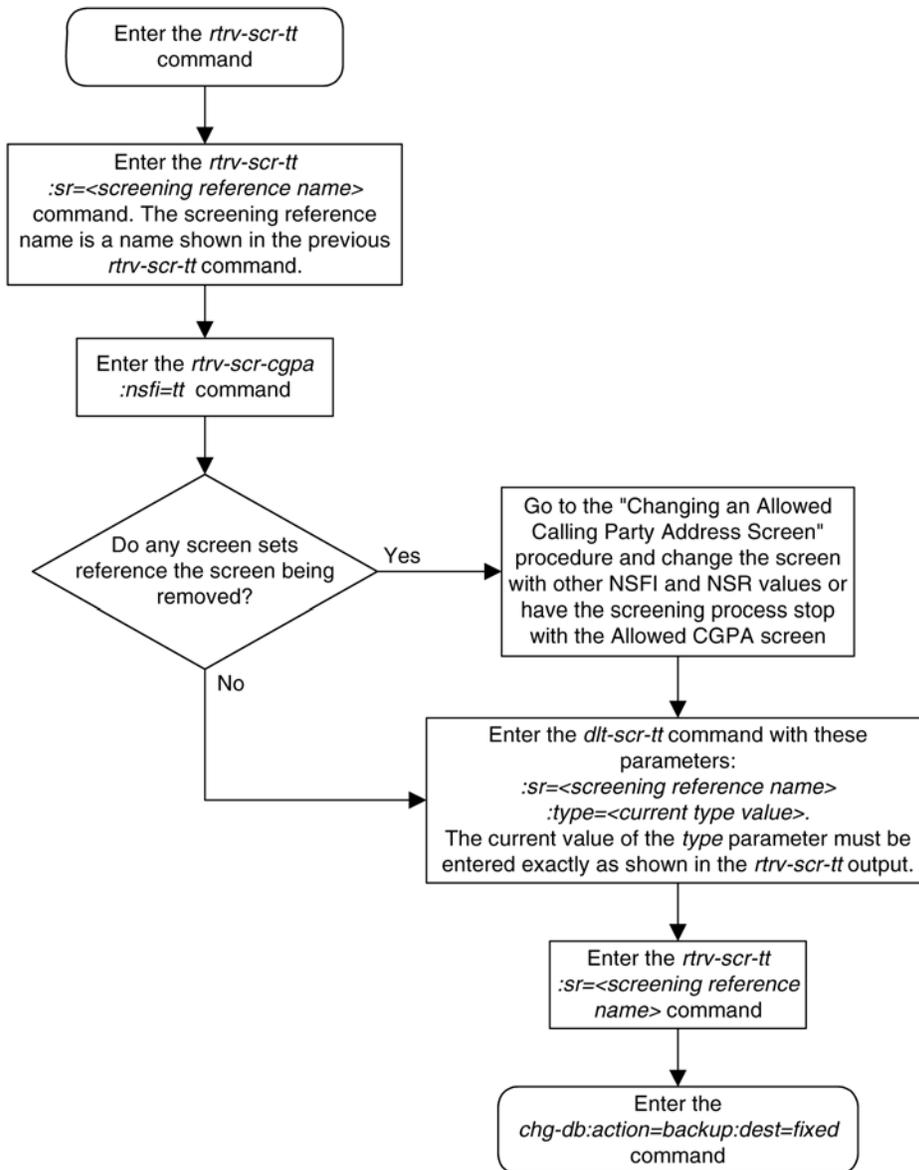

Changing an Allowed Translation Type Screen

This procedure is used to change the attributes of an allowed translation type (TT) screen in the database using the **chg-scr-tt** command. The parameters used by the **chg-scr-tt** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The example in this procedure is used to change the translation type 016 for the allowed CGPA screen **iec** to 210 and change the NSFPI to **stop**.

The allowed TT screen can only reference an allowed CDPA screen. This can be verified using the **rtrv-scr-cdpa:all=yes** command. If the desired allowed CDPA screen is not in the database, perform one of these procedures to add the required screen to the database or change an existing screen in the database.

- [Adding an Allowed Called Party Address Screen](#)
- [Changing an Allowed Called Party Address Screen](#)

Specifying a Range of Values

A range of values can be specified for the **type** parameter. The range of values specified for the **type** parameter cannot include any values currently provisioned for the screen reference name.

For example, screening reference name **scr1** contains these entries:

```
SR   TYPE      NSFPI   NSR/ACT
scr1 110        STOP    -----
scr1 125        STOP    -----
```

Another entry for screening reference **scr1** cannot contain a range of values that would include the **type** parameter values 110 or 125.

Procedure

1. Display the allowed TT screens in the database using the **rtrv-scr-tt** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED TT
SR   REF  RULES
GW16 YES   1
IEC  YES   3
WRD2 YES   1
WRD4 YES   1
```

From the **rtrv-scr-tt** output, display the allowed TT screen you wish to remove using the **rtrv-scr-tt** command with the screening reference name. For this example, enter the **rtrv-scr-tt:sr=iec** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED TT
SR   TYPE      NSFPI   NSR/ACT
IEC  005&&010  STOP    -----
IEC  012        STOP    -----
IEC  016        CDPA    IEC
```

If a gateway screening stop action set is to be assigned to the allowed TT screen being added to the database, go to step 2.

Step 2 verifies the gateway screening stop action set names in the database. The gateway screening stop action set names are assigned only if the NSFPI of the screen being changed in this procedure is STOP. If the NSFPI of the screen will be changed to STOP, but a gateway screening stop action set name will not be

assigned to the screen, skip steps 2 and 3 and go to step 4. If the NSFI of the screen will not be STOP, skip step 2 and go to step 3.

2. Display the gateway screening stop action sets in the database with the `rtrv-gws-actset` command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
ACT ACT
ID NAME 1 2 3 4 5 6 7 8 9 10
-----
1 copy copy
2 rdct rdct
3 cr copy rdct
4 cncf cncf
5 cpncf copy cncf
6 cncfrd cncf rdct
7 cpcf rd copy cncf rdct
```

GWS action set table is (7 of 16) 44% full

If the required gateway screening stop action set is not in the database, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure to configure the required gateway screening stop action set.

NOTE: If the NSFI of the screen being added in this procedure is STOP, skip step 3 and go to step 4.

3. Enter the `rtrv-scr-cdpa` command to verify that the screen that will be specified by the NSFI/NSR parameter combination in step 4 is in the database.

If the desired screen is not in the database, perform one of these procedures to add the desired screen to the database or change an existing screen in the database.

- [Adding an Allowed Called Party Address Screen](#)
- [Changing an Allowed Called Party Address Screen](#)

4. Change the attributes of an allowed TT screen using the `chg-scr-tt` command.

If a gateway screening stop action is to be assigned to the allowed TT screen being changed, enter the `chg-scr-tt` command with the `nsfi=stop` parameter and the `actname` parameter with the name of a gateway screening stop action set shown in the output of the `rtrv-gws-actset` command executed in step 2.



CAUTION: The EAGLE 5 ISS does not support redirecting MSUs for the DTA feature or intercepting ISUP IAM messages for the Calling Name Conversion Facility feature from the allowed TT screen. Gateway screening stop action sets containing either the RDCT (redirect) or CNCF (calling name conversion facility) stop actions should not be assigned to the allowed TT screen. If a gateway screening stop action set containing the RDCT or CNCF stop actions is specified with the `chg-scr-tt` command, unsolicited information message (UIM) 1128 is generated when the attempt is made to redirect MSUs from the allowed TT screen. Unsolicited information message (UIM) 1218 is generated when ISUP IAM MSUs are intercepted from the allowed TT screen. For more information on UIMs 1128 and 1218, go to the *Maintenance Manual*.

The value of the `ntype` parameter can be from 0 to 255 or an asterisk (*). The current value of the `type` parameter must be entered exactly as shown in the `rtrv-scr-tt` output in step 1.

A range of values can be specified for the `ntype` parameter. See the [“Specifying a Range of Values”](#) section for more information on how a range of values is used for the `ntype` parameter.

For this example, enter this command.

```
chg-scr-tt:sr=iec:type=016:ntype=210:nsfi=stop
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
CHG-SCR-TT: SCREEN SET AFFECTED - IEC 4% FULL
CHG-SCR-TT: MASP A - COMPLTD
```

5. Verify the changes using the **rtrv-scr-tt** command with the screening reference name used in step 4.

For this example, enter this command.

```
rtrv-scr-tt:sr=iec
```

The following is an example of the possible output.


```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED TT
SR   TYPE      NSFI   NSR/ACT
IEC  005&&010  STOP   -----
IEC  012       STOP   -----
IEC  210       STOP   -----
```


6. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.


The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 5-4. Changing an Allowed Translation Type Screen

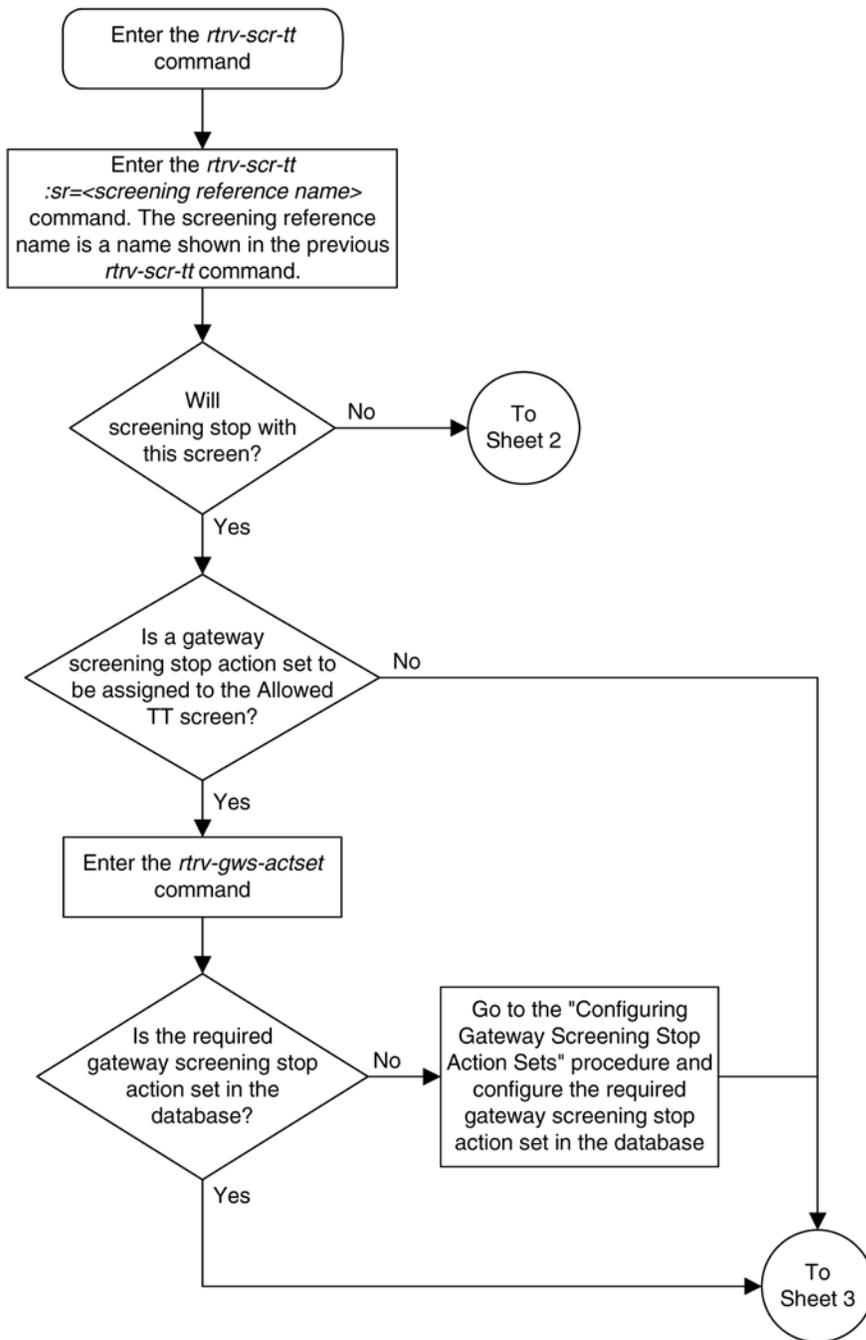

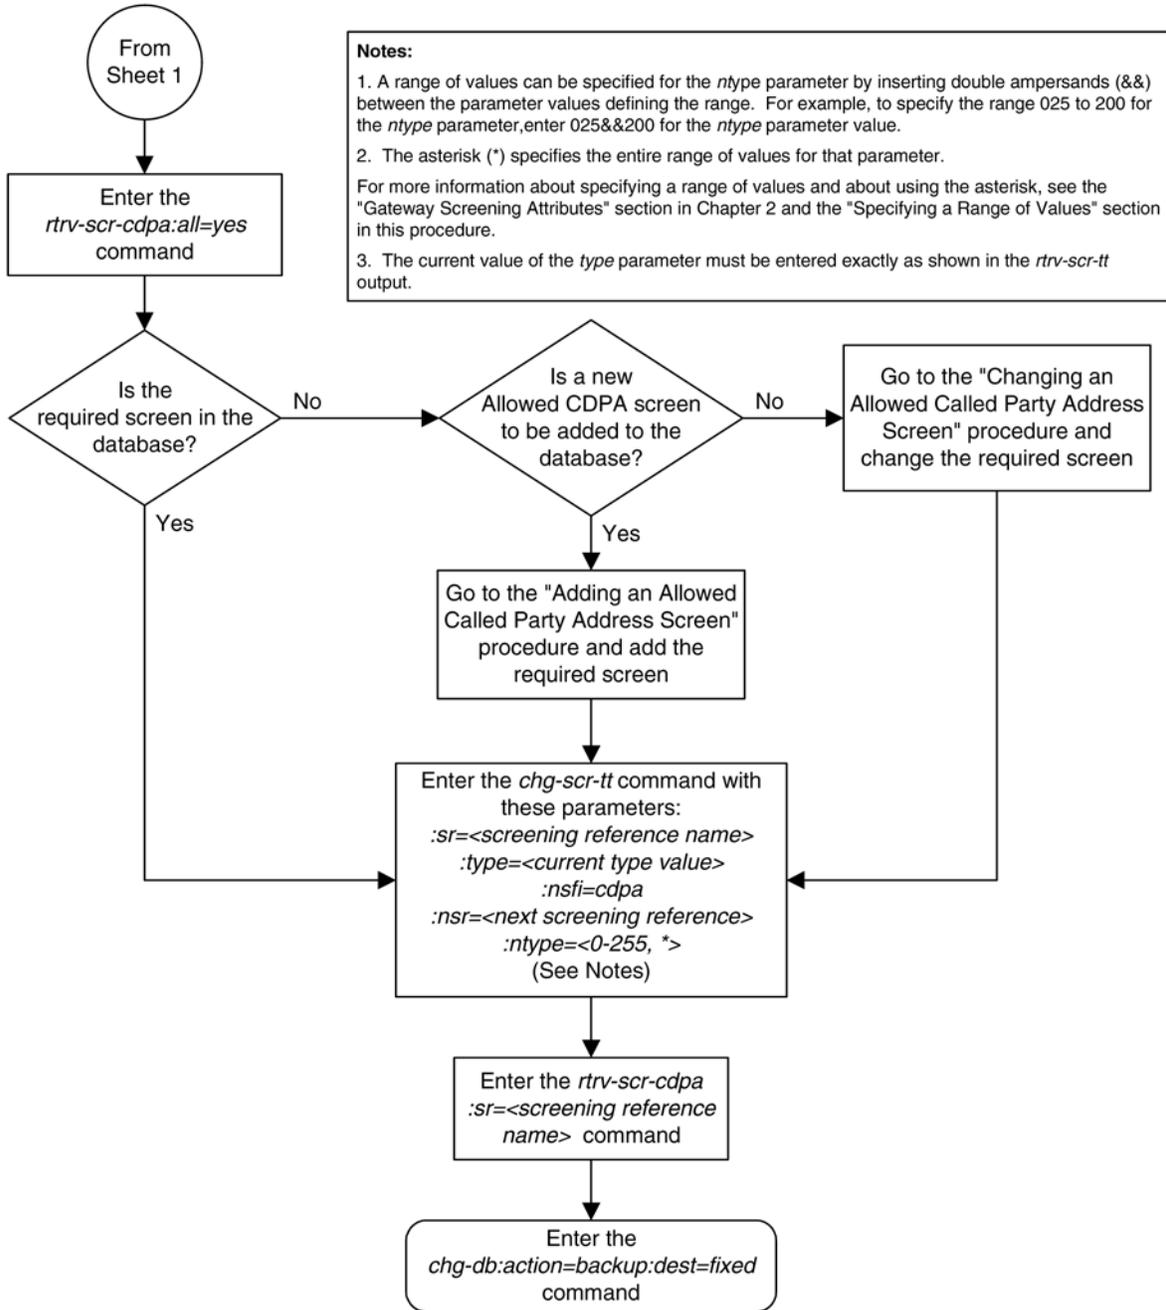

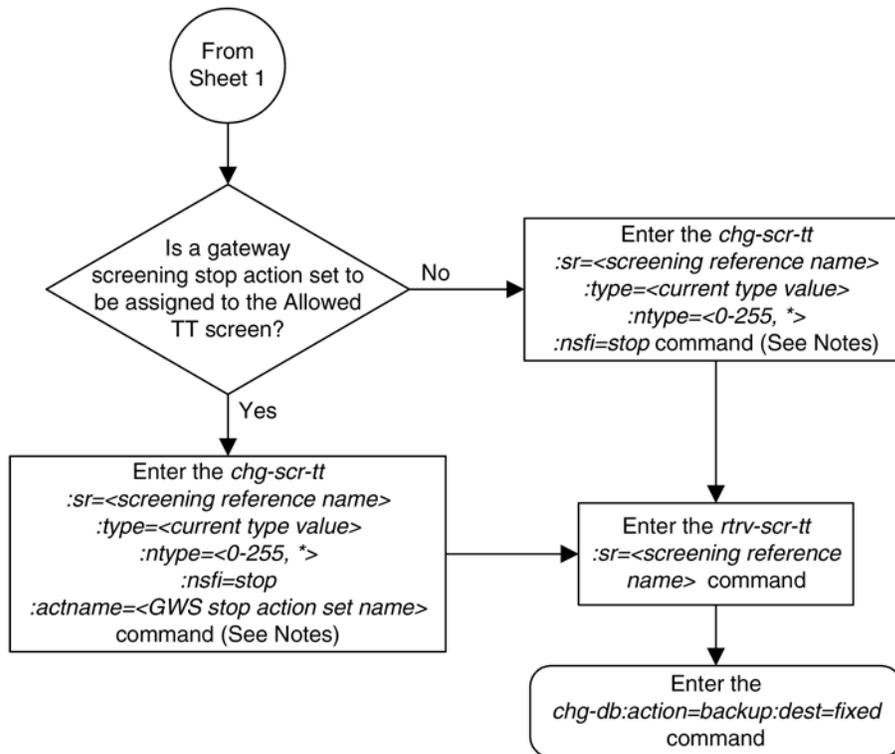

Notes:

1. A range of values can be specified for the *ntype* parameter by inserting double ampersands (&&) between the parameter values defining the range. For example, to specify the range 025 to 200 for the *ntype* parameter, enter 025&&200 for the *ntype* parameter value.
2. The asterisk (*) specifies the entire range of values for that parameter.

For more information about specifying a range of values and about using the asterisk, see the "Gateway Screening Attributes" section in Chapter 2 and the "Specifying a Range of Values" section in this procedure.

3. The current value of the *type* parameter must be entered exactly as shown in the *rtv-scr-tt* output.

Allowed Calling Party (CGPA) Screen Configuration

Introduction	6-1
Adding an Allowed Calling Party Address Screen	6-6
Removing an Allowed Calling Party Address Screen	6-15
Changing an Allowed Calling Party Address Screen	6-19

Introduction

The allowed calling party address (CGPA) screen is used to screen SCCP messages from another network. The gray shaded areas in [Figure 6-1](#) shows the fields of the SS7 message that are checked by the CGPA screening function. The screening reference contains a list of point codes and subsystem number combinations. If a match is found, the **nsfi** is examined to determine the next step in the screening process.

If the **nsfi** is equal to **stop**, the message is processed and no further screening takes place.

If the **nsfi** is equal to **stop**, and the **copy** gateway screening stop action is specified, the message is processed and a copy of the message is sent by the STPLAN feature to an external application.

If the **nsfi** is equal to anything else, the next screening reference (**nsr**) is identified and the screening process continues to the next screen identified by the **nsfi** and **nsr** parameters. If no match is found, the message is discarded.

Any MSU that does not contain a service indicator of 3 in the SIO field and does not contain the SCCP message types 9, 10, 17, or 18 and reaches this screen in the gateway screening process automatically passes gateway screening and is allowed into the EAGLE 5 ISS.


The value of the **nsfi** parameter is based on the value of the routing indicator (**ri**) parameter. [Table 6-1](#) shows the valid combinations of **nsfi** values and routing indicator values.

Table 6-1. Valid Parameter Combinations for the Allowed CGPA Screening Function

Routing Indicator (RI) Values	Nest Screening Function Identifier (NSFI) Values
GT	TT
DPC	CDPA
* (asterisk)	TT, CDPA

[Flowchart 6-20](#) shows the screening action of the allowed CGPA screen.

Flowchart 6-1. Allowed CGPA Screening Action

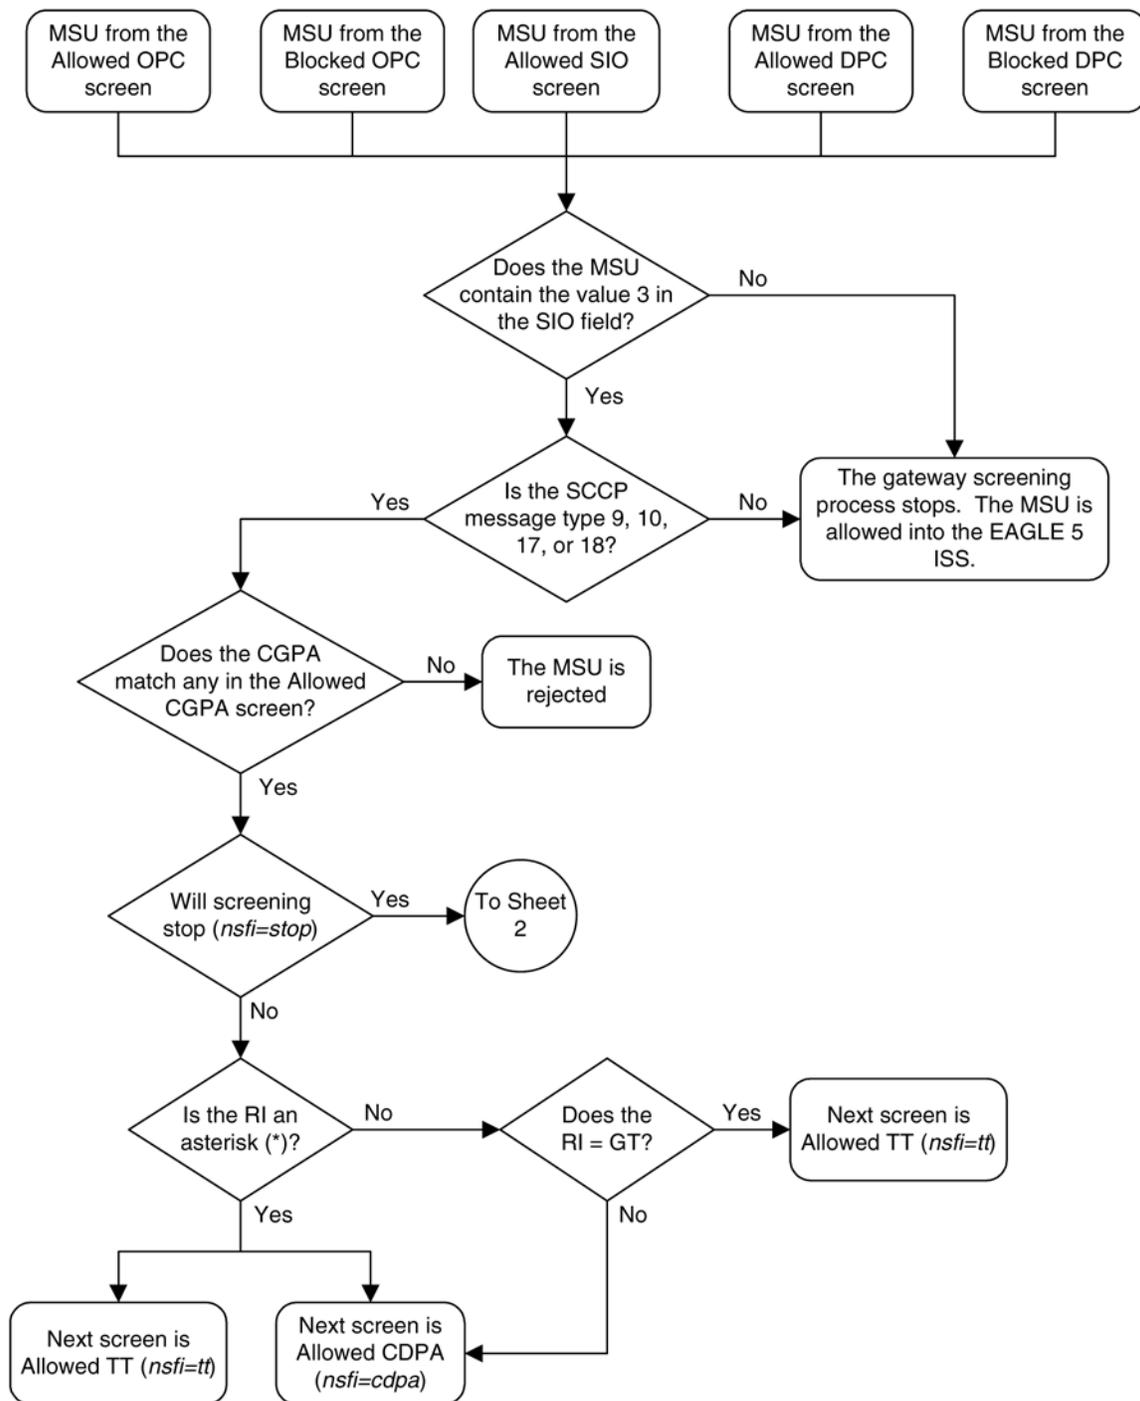

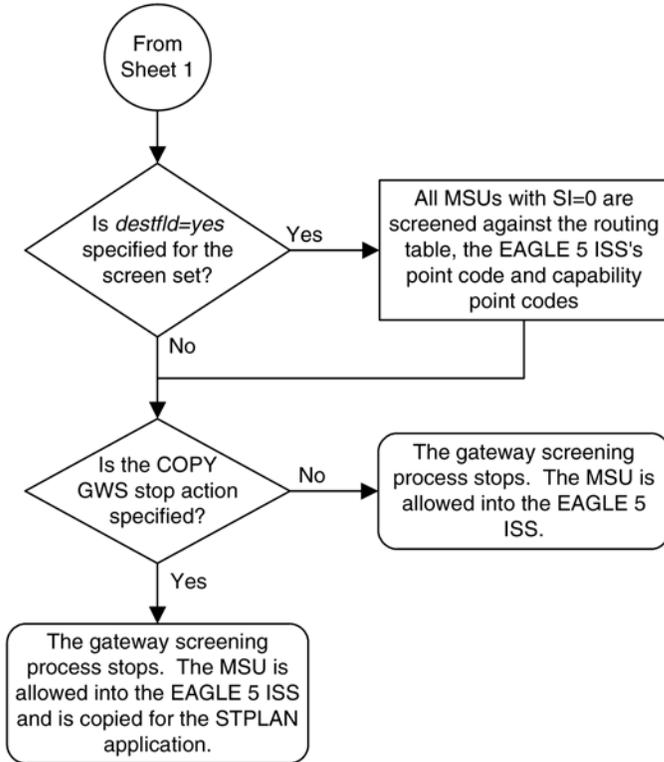


Figure 6-1. Allowed Calling Party Address Screening Function

ANSI MSU (ANSI Message Signal Unit)						
BSN FSN LI	SIO xx xx xxxx NIC PRI SI	SIF				
		DPC NCM NC NI	Routing Label OPC NCM NC NI	SLS xx	SCCP Message Type xxxx xxxx	CGPA Length Address Indicator Subsystem Point Code (NCM NC NI)

ITU-I MSU (ITU International Message Signal Unit)						
BSN FSN LI	SIO xx xx xxxx NIC PRI SI	SIF				
		DPC ID AREA ZONE	Routing Label OPC ID AREA ZONE	SLS xx	SCCP Message Type xxxx xxxx	CGPA Length Address Indicator Subsystem Point Code (ID AREA ZONE)

14-Bit ITU-N MSU (14-Bit ITU National Message Signal Unit)						
BSN FSN LI	SIO xx xx xxxx NIC PRI SI	SIF				
		DPC NPC	Routing Label OPC NPC	SLS xx	SCCP Message Type xxxx xxxx	CGPA Length Address Indicator Subsystem Point Code (NPC)

24-Bit ITU-N MSU (24-Bit ITU National Message Signal Unit)						
BSN FSN LI	SIO xx xx xxxx NIC PRI SI	SIF				
		DPC SP SSA MSA	Routing Label OPC SP SSA MSA	SLS xx	SCCP Message Type xxxx xxxx	CGPA Length Address Indicator Subsystem Point Code (SP SSA MSA)

Adding an Allowed Calling Party Address Screen

This procedure is used to add an allowed calling party address (CGPA) screen to the database using the **ent-scr-cgpa** command. The parameters used by the **ent-scr-cgpa** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The examples in this procedure are used to add the allowed CGPA screen data shown in [Table 6-2](#) and based on the example configurations shown in [Figure 2-3](#) through [Figure 2-5](#).

Table 6-2. Example Gateway Screening Allowed CGPA Configuration Table

Screening Reference	ZONE	AREA	ID	SSN	RI	SCCPMT	NSFI	NSR
gw11	7	100	4	254	*	010	cdpa	gw15
Screening Reference	NI	NC	NCM	SSN	RI	SCCPMT	NSFI	NSR
gw13	007	007	007	250	gt	017	tt	gw16
gw14	006	006	006	253	dpc	009	cdpa	gw17

NOTE: If you using multiple-part ITU national point codes with gateway screening, see the [14-Bit ITU National Point Code Formats](#) section.

The allowed CGPA screen can reference one of the following screens.

- Allowed TT
- Allowed CDPA

Verifying the Gateway Screening Configuration

Enter the following commands to verify that these screens are in the database.

- **rtrv-scr-tt:all=yes**
- **rtrv-scr-cdpa:all=yes**

Gateway Screening Configuration Procedures

If the desired screen is not in the database, perform one of the following procedures to add the desired screen to the database or change an existing screen in the database.

- [Adding an Allowed Translation Type Screen](#)
- [Adding an Allowed Called Party Address Screen](#)
- [Changing an Allowed Translation Type Screen](#)
- [Changing an Allowed Called Party Address Screen](#)

Specifying a Range of Values

A range of values can be specified for the point code parameters **ni**, **nc**, or **ncm**.

If a range of values is specified for any of these parameters, and the value of the other parameters match existing values for the screening reference name, the range of values for the point code parameter cannot include any values for that parameter that are currently provisioned for the screening reference name.

For example, screening reference name **scr1** contains these entries:

SR	NI	NC	NCM	SSN	RI	SCCPMT	NSFI	NSR/ACT
SCR1	240	001	010	012	DPC	009	STOP	-----
SCR1	241	010	020	*	GT	017	TT	SCR1

Another entry for screening reference **scr1** with the **ni** value of 240 and the **nc** value of 001 cannot be specified if the range of values for the **ncm** parameter includes the value 010.

The ANSI point code parameter values can be specified as a single value, a range of values, or with an asterisk (*). The asterisk specifies all possible values for the **ni**, **nc**, and **ncm** parameters. [Table 6-3](#) shows the valid combinations of these parameter values.

Table 6-3. Valid Value Combinations for ANSI Point Code Parameters

NI	NC	NCM
Single Value	Single Value	Single Value
Single Value	Single Value	Range of Values
Single Value	Single Value	Asterisk
Single Value	Range of Values	Asterisk
Single Value	Asterisk	Asterisk
Range of Values	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

A range of values can also be specified for an ITU-I or 24-bit ITU-N point code parameter using a combination of asterisks (*) and single values for the point code parameters. [Table 6-4](#) shows the valid combinations of the ITU-I parameter values. [Table 6-5](#) shows the valid combinations of the 24-bit ITU-N parameter values.

Table 6-4. Valid Value Combinations for ITU-I Point Code Parameters

ZONE	AREA	ID
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Table 6-5. Valid Value Combinations for 24-Bit ITU-N Point Code Parameters

MSA	SSA	SP
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Procedure

1. Verify that the gateway screening feature is on, by entering the **rtrv-feat** command.

If the gateway screening feature is on, the **GWS** field is set to **on**.

NOTE: The **rtrv-feat** command output contains other fields that are not used by this procedure. If you wish to see all the fields displayed by the **rtrv-feat** command, see the **rtrv-feat** command description in the *Commands Manual*.

If the gateway screening feature is on, shown by the entry **GWS = on** in the **rtrv-feat** command output, skip step 2, and go to step 3.

- Turn the gateway screening feature on by entering this command.

```
chg-feat:gws=on
```

NOTE: Once the gateway screening feature is turned on with the `chg-feat` command, it cannot be turned off.

The gateway screening feature must be purchased before you turn this feature on with the `chg-feat` command. If you are not sure if you have purchased the gateway screening feature, contact your Tekelec Sales Representative or Account Representative.

When the `chg-feat` has successfully completed, this message should appear.

```
rlghncxa03w 06-10-28 11:43:04 GMT EAGLE5 36.0.0
CHG-FEAT: MASP A - COMPLTD
```

- Display all allowed CGPA screens in the database using the `rtrv-scr-cgpa` command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED CGPA
SR  REF  RULES
IEC  YES   2
WRD2 YES   1
WRD4 YES   9
```

If the screening reference names that you wish to add with this procedure are not shown in the `rtrv-scr-cgpa` command output, go to step 2. For this example, the screening reference names are not shown. If these screening reference names are shown in the `rtrv-scr-cgpa` command output, make sure the screening data you wish to enter is not already in the database by entering the `rtrv-scr-cgpa` command with the screening reference name. For example, enter the `rtrv-scr-cgpa:sr=iec` command. The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED CGPA
SR  NI      NC      NCM      SSN      RI  SCCPMT  NSFI  NSR/ACT
IEC  240     001     010     012     DPC  009     STOP  -----
IEC  241     010     *       *       GT   017     TT   TT1
```

If a gateway screening stop action set is to be assigned to the allowed CGPA screen being added to the database, go to step 4.

Step 4 verifies the gateway screening stop action set names in the database. The gateway screening stop action set names are assigned only if the NSFI of the screen being added in this procedure is STOP. If the NSFI of the new screen will be STOP, but a gateway screening stop action set name will not be assigned to the new screen, skip steps 4 and 5 and go to step 6. If the NSFI of the new screen is not STOP, skip step 4 and go to step 5.

- Display the gateway screening stop action sets in the database with the `rtrv-gws-actset` command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT
ID  NAME  1    2    3    4    5    6    7    8    9    10
--  ----  ---  ---  ---  ---  ---  ---  ---  ---  ---
1   copy  copy
2   rdct  rdct
3   cr    copy rdct
4   cncf  cncf
5   cpcncf copy cncf
6   cncfrd cncf rdct
7   cpcfrd copy cncf rdct
```

GWS action set table is (7 of 16) 44% full

If the required gateway screening stop action set is not in the database, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure to configure the required gateway screening stop action set.

NOTE: If the NSFI of the screen being added in this procedure is STOP, skip step 5 and go to step 6.

5. Enter the commands in the [Verifying the Gateway Screening Configuration](#) section to verify that the screen that will be specified by the NSFI/NSR parameter combination in step 7 is in the database.

If the desired screen is not in the database, perform one of the procedures shown in the [Gateway Screening Configuration Procedures](#) section to add the desired screen to the database or change an existing screen in the database.

NOTE: If the point code being added in this procedure is not an ITU-I or 14-bit ITU-N spare point code, skip step 6 and to step 7.

NOTE: If the point code being added in this procedure is an ITU-I or 14-bit ITU-N spare point code and the screening reference contains ITU-I or 14-bit ITU-N spare point codes, skip step 6 and go to step 7.

6. Display the status of the ITU National and International Spare Point Code Support feature by entering the **rtrv-ctrl-feat** command with the ITU National and International Spare Point Code Support feature part number.

Enter this command.

```
rtrv-ctrl-feat:partnum=893013601
```

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
The following features have been permanently enabled:
```

Feature Name	Partnum	Status	Quantity
Spare Point Code Support	893013601	on	----

The following features have been temporarily enabled:

Feature Name	Partnum	Status	Quantity	Trial Period Left
Zero entries found.				

The following features have expired temporary keys:

Feature Name	Partnum
Zero entries found.	

If the ITU National and International Spare Point Code Support feature is enabled, go to step 7.

If the ITU National and International Spare Point Code Support feature is not enabled, perform the “Activating the ITU National and International Spare Point Code Support Feature” procedure in the *Database Administration Manual - SS7* to enable the ITU National and International Spare Point Code Support feature as required. After the feature has been enabled, go to step 7.

7. Add a new allowed CGPA screen to the database using the **ent-scr-cgpa** command.

If a gateway screening stop action is to be assigned to the allowed CGPA screen being changed, enter the **ent-scr-cgpa** command with the **nsfi=stop** parameter and the **actname** parameter with the name of a gateway screening stop action set shown in the output of the **rtrv-gws-actset** command executed in step 4.



CAUTION: The EAGLE 5 ISS does not support redirecting MSUs for the DTA feature or intercepting ISUP IAM messages for the Calling Name Conversion Facility feature from the allowed CGPA screen. Gateway screening stop action sets containing either the RDCT (redirect) or CNCF (calling name conversion facility) stop actions should not be assigned to the allowed CGPA screen. If a gateway screening stop action set containing the RDCT or CNCF stop actions is specified with the `ent-scr-cgpa` command, unsolicited information message (UIM) 1126 is generated when the attempt is made to redirect MSUs from the allowed CGPA screen. Unsolicited information message (UIM) 1216 is generated when ISUP IAM MSUs are intercepted from the allowed CGPA screen. For more information on UIMs 1126 and 1216, go to the *Maintenance Manual*.

The following list contains the values for `ni`, `nc`, `ncm`, `zone`, `area`, `id`, `npc`, `msa`, `ssa`, `sp`, `ssn`, `ri`, and `sccpmt` parameters:

- `ni` – 0 - 255 or an asterisk (*)
- `nc` – 0 - 255 or an asterisk (*)
- `ncm` – 0 - 255 or an asterisk (*)
- `zone` – 0 - 7 or an asterisk (*)
- `area` – 0 - 255 or an asterisk (*)
- `id` – 0 - 7 or an asterisk (*)
- `npc` – 1 - 16383 or an asterisk (*)
- `msa` – 0 - 255 or an asterisk (*)
- `ssa` – 0 - 255 or an asterisk (*)
- `sp` – 0 - 255 or an asterisk (*)
- `ssn` – 0 - 255 or an asterisk (*)
- `ri` – `gt`, `dpc` or an asterisk (*)
- `sccpmt` – 9, 10, 17, 18 or an asterisk (*)

NOTE: If either the `ri=gt` or `nsfi=tt` parameter is specified, the other parameter must be specified. If either the `ri=dpc` or `nsfi=cdpa` parameter is specified, the other parameter must be specified. If the `ri=*` parameter is specified, either the `nsfi=gt` or `nsfi=dpc` parameters can be specified.

NOTE: If the `sccpmt` parameter is not specified, an asterisk will be entered as the value of the `sccpmt` parameter.

A range of values can be specified for the `ni`, `nc`, and `ncm` parameters. See the [“Specifying a Range of Values”](#) section for more information on how the asterisk and a range of values are used for the `ni`, `nc`, and `ncm` parameters.

To add a spare point code to the allowed CGPA screen, the `pcst=s` parameter must be specified. To add a non-spare point code to the allowed CGPA screen, the `pcst` parameter does not have to be specified. If the `pcst` parameter is specified for a screen containing an ITU-I or 14-bit ITU-N non-spare point code, the value must be `none`.

For this example, enter these commands.

ent-scr-

cgpa:sr=gw11:zone=7:area=100:id=4:ssn=254:ri=* :sccpmt=010:nsfi=cdpa:nsr=gw15

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
ENT-SCR-CGPA: SCREEN SET AFFECTED - GW11 1% FULL
ENT-SCR-CGPA: MASP A - COMPLTD
```

ent-scr-

cgpa:sr=gw13:ni=007:nc=007:ncm=007:ssn=250:ri=gt :sccpmt=017:nsfi=tt:nsr=gw16

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:29:30 GMT EAGLE5 36.0.0
ENT-SCR-CGPA: SCREEN SET AFFECTED - GW13 1% FULL
ENT-SCR-CGPA: MASP A - COMPLTD
```

ent-scr-

cgpa:sr=gw14:ni=006:nc=006:ncm=006:ssn=253:ri=dpc :sccpmt=009:nsfi=cdpa:nsr=gw17

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:30:30 GMT EAGLE5 36.0.0
ENT-SCR-CGPA: SCREEN SET AFFECTED - GW14 1% FULL
ENT-SCR-CGPA: MASP A - COMPLTD
```

8. Verify the changes using the **rtrv-scr-cgpa** command with the screening reference name used in step 7.

For this example, enter these commands.

rtrv-scr-cgpa:sr=gw11

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:32:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED CGPA
SR      ZONE  AREA  ID      SSN      RI      SCCPMT  NSFI      NSR/ACT
GW11    7       100   4       254     *       010     CDPA      GW15
```

rtrv-scr-cgpa:sr=gw13

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:33:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED CGPA
SR      NI      NC      NCM     SSN      RI      SCCPMT  NSFI      NSR/ACT
GW13    007     007     007     250     SSN    017     CDPA      GW16
```

rtrv-scr-cgpa:sr=gw14

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:34:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED CGPA
SR      NI      NC      NCM     SSN      RI      SCCPMT  NSFI      NSR/ACT
GW14    006     006     006     253     GT     009     TT        GW17
```


- Backup the new changes using the **chg-db:action=backup:dest=fixed** command.


The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.


```

BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
    
```

Flowchart 6-2. Adding an Allowed Calling Party Address Screen

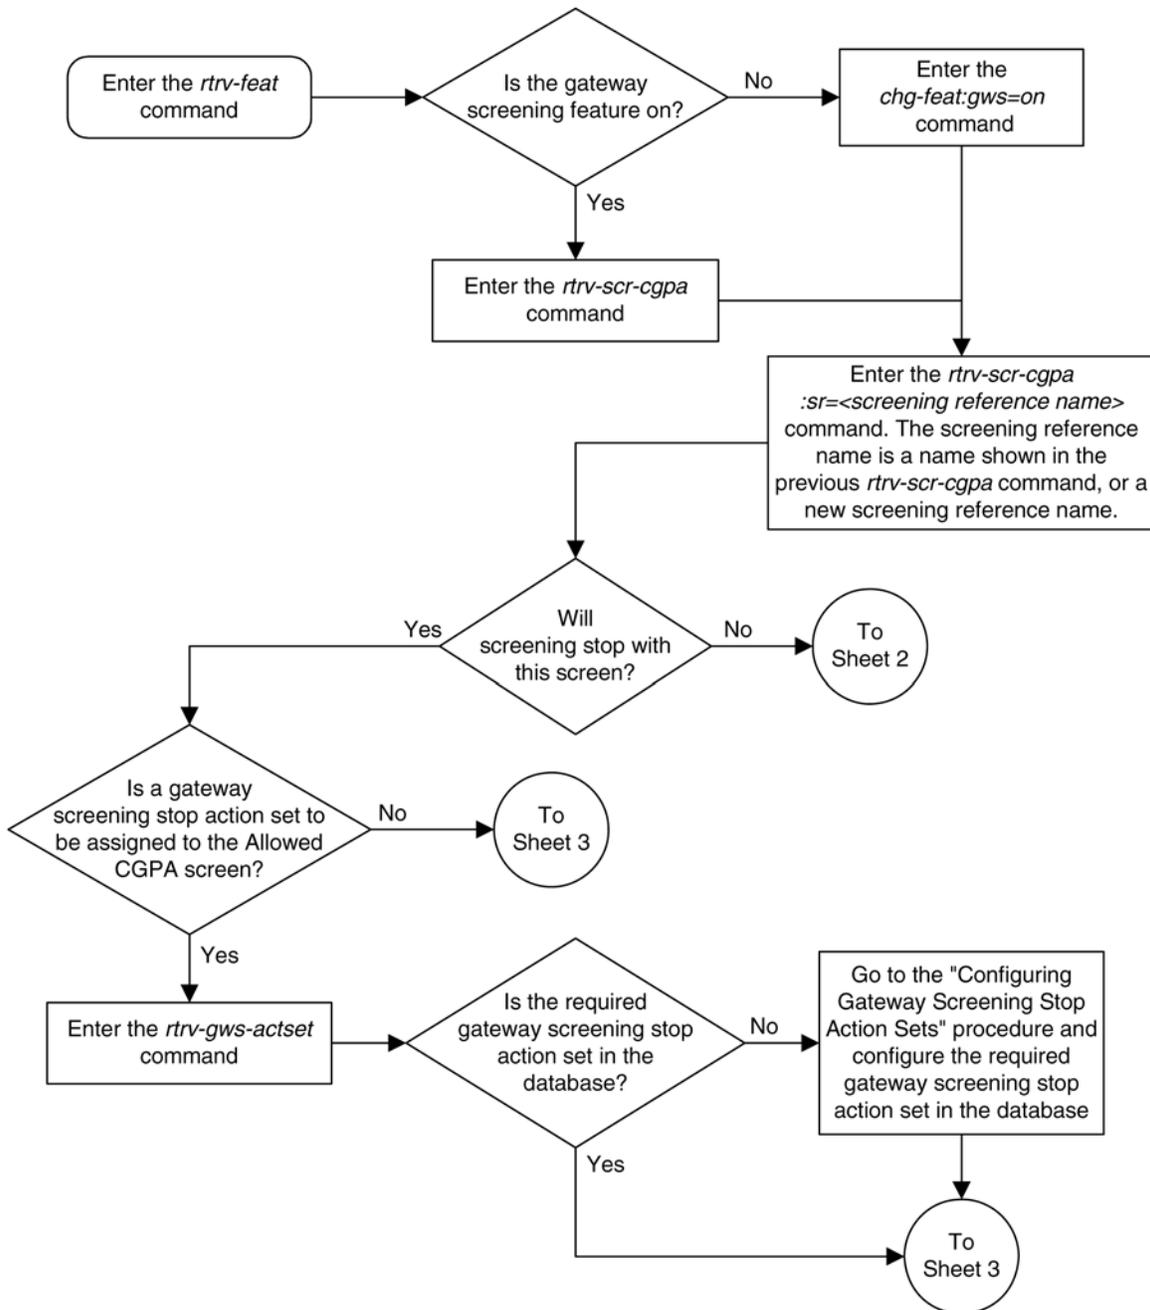

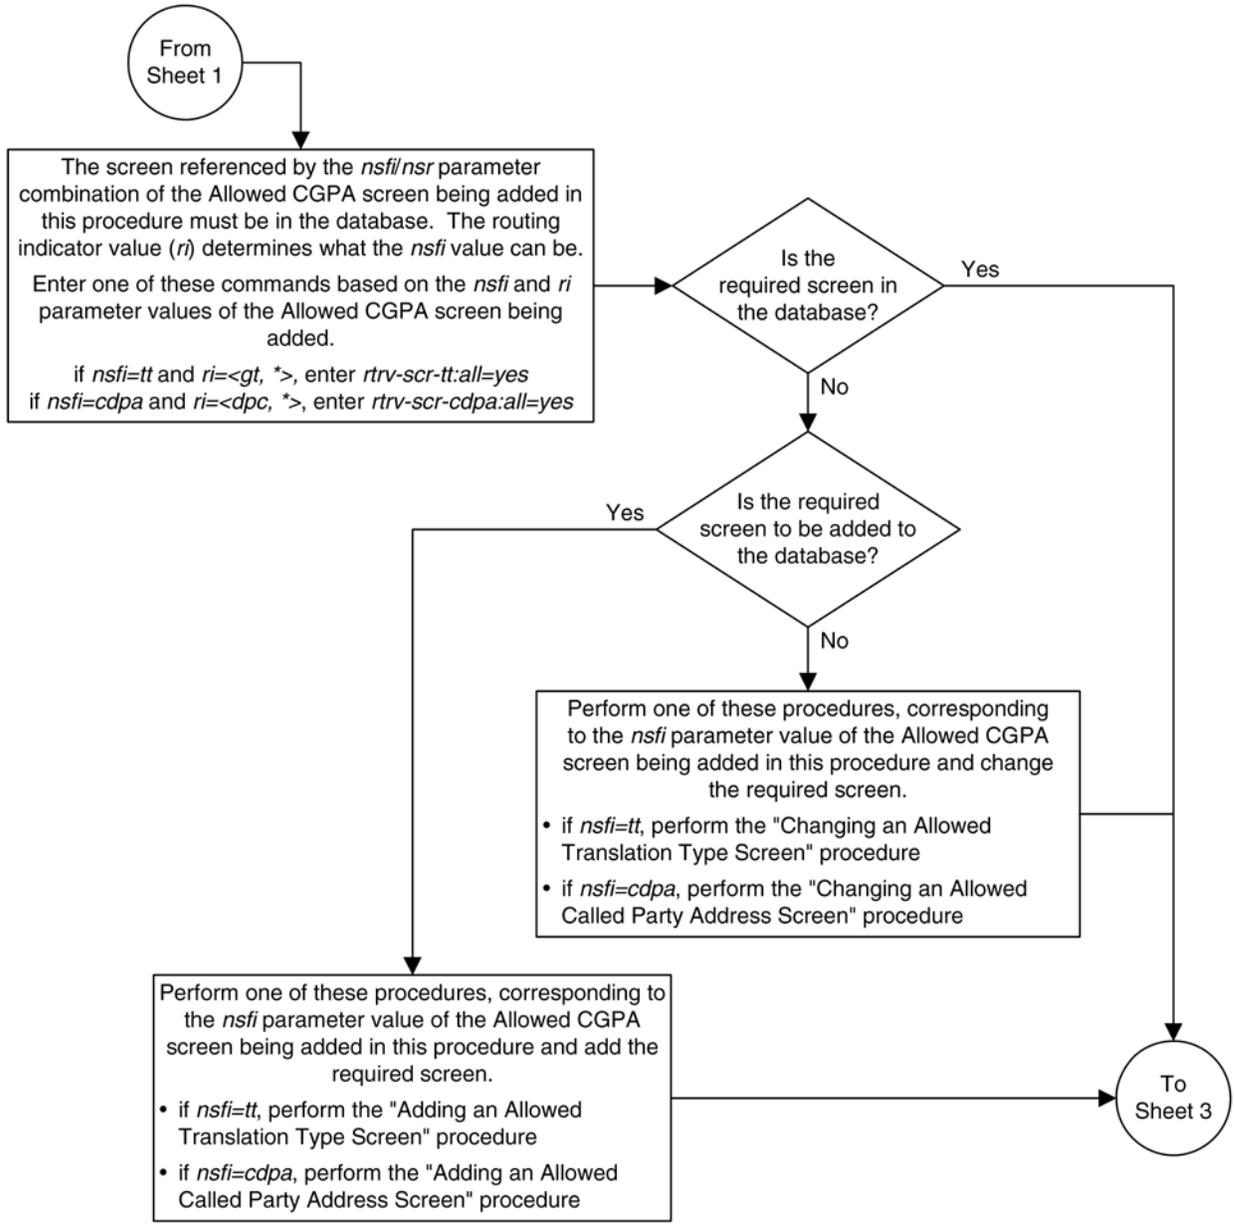

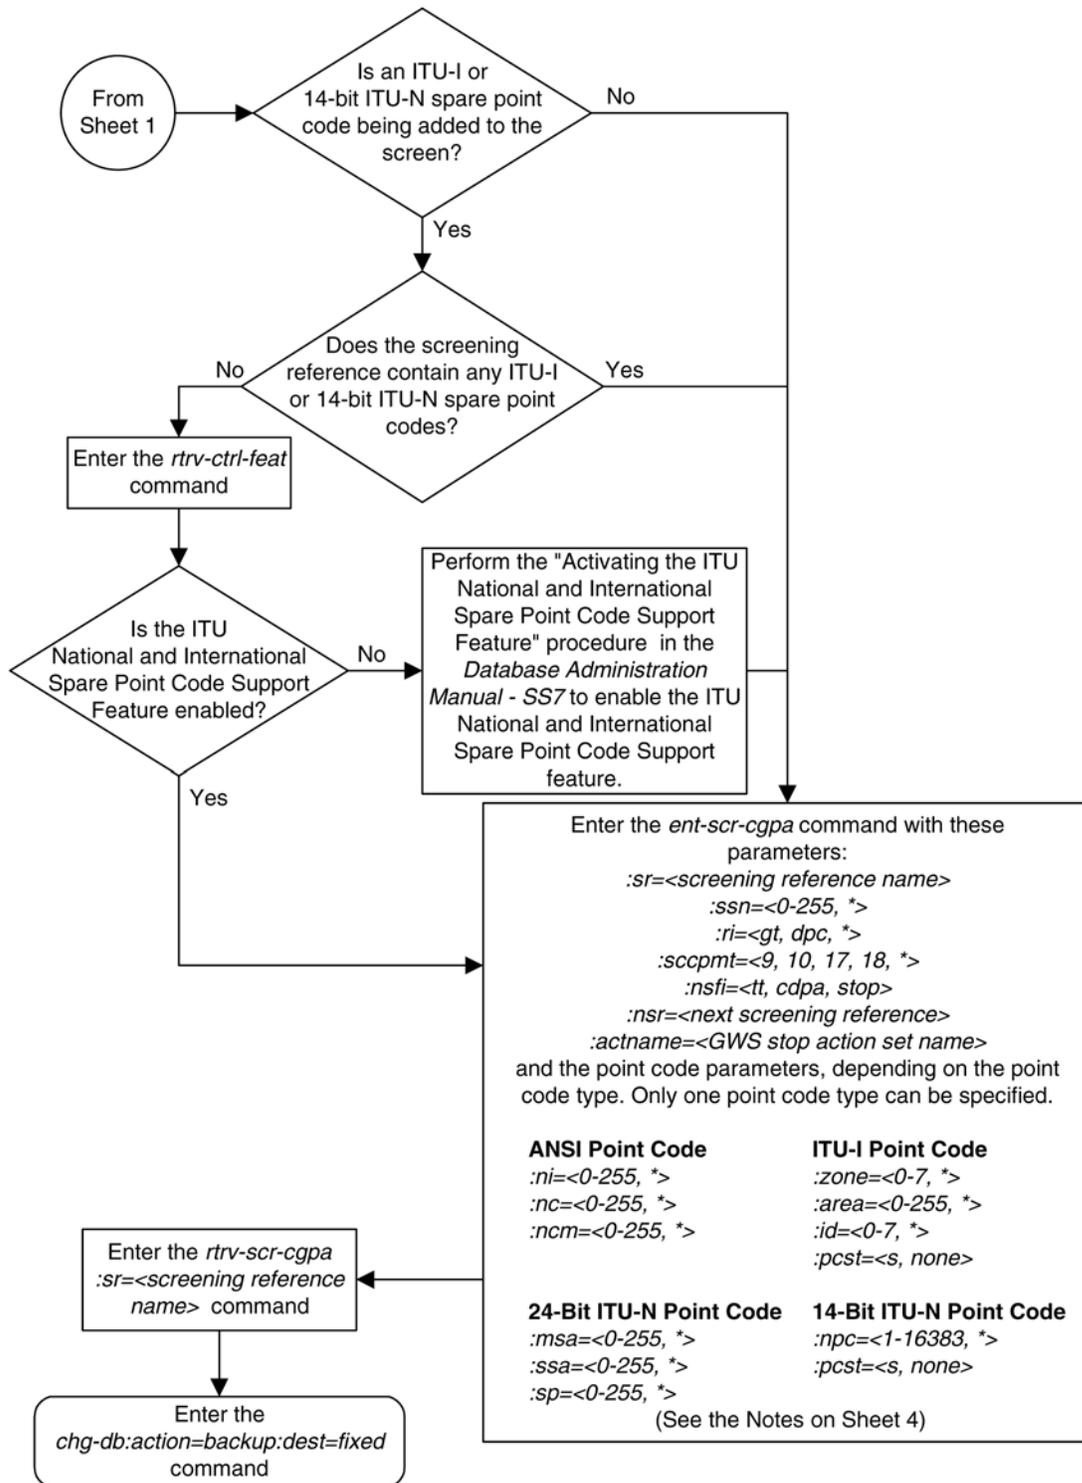

Notes:

1. A range of values can be specified for the *ni*, *nc*, or *ncm* parameters by inserting double ampersands (&&) between the parameter values defining the range. For example, to specify the range 025 to 200 for the *ni* parameter, enter 025&&200 for the *ni* parameter value.
2. The asterisk (*) specifies the entire range of values for that parameter.
For more information about specifying a range of values and about using the asterisk, see the "Gateway Screening Attributes" section in Chapter 2 and the "Specifying a Range of Values" section in this procedure.
3. If the *sccpmt* parameter is not specified, an asterisk will be entered as the value for the *sccpmt* parameter.
4. To specify the *nsfi=tt* parameter, the *ri* parameter value must be *gt* or ***.
5. To specify the *nsfi=cdpa* parameter, the *ri* parameter value must be *dpc* or ***.
6. The *nsr* parameter can be specified only, and must be specified, if the *nsfi=tt* or *nsfi=cdpa* parameters are specified.
7. The *actname* parameter can be specified only if the *nsfi=stop* parameter is specified. The *actname* parameter is optional. If the *actname* parameter is specified, the *actname* parameter value is one of the gateway screening stop action set names shown in the *rtv-gws-actset* output on Sheet 1.
8. To add a non-spare point code, the *pcst* parameter does not have to be specified. If the *pcst* parameter is specified for a screen containing an ITU-I or 14-bit ITU-N non-spare point code, the value must be *none*.
9. To add a spare point code, the *pcst=s* parameter must be specified.

Removing an Allowed Calling Party Address Screen

This procedure is used to remove an allowed calling party address (CGPA) screen from the database using the **dlt-scr-cgpa** command. The parameters used by the **dlt-scr-cgpa** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The example in this procedure removes the allowed CGPA screen **gw14** from the database.

NOTE: If you using multiple-part ITU national point codes with gateway screening, see the [14-Bit ITU National Point Code Formats](#) section.

The allowed CGPA screen can be referenced by one of the following screens.

- Allowed OPC
- Blocked OPC
- Allowed SIO
- Allowed DPC
- Blocked DPC

Verifying the Gateway Screening Configuration

Enter the following commands to verify that none of these screens reference the allowed CGPA screen being removed from the database.

- `rtrv-scr-opc:nsfi=cgpa`
- `rtrv-scr-blkopc:nsfi=cgpa`
- `rtrv-scr-sio:nsfi=cgpa`
- `rtrv-scr-dpc:nsfi=cgpa`
- `rtrv-scr-blkdpc:nsfi=cgpa`

Gateway Screening Configuration Procedures

To change the NSFI of any of these screens, perform one of these procedures.

- [Changing a Blocked DPC Screen](#)
- [Changing an Allowed DPC Screen](#)
- [Changing an Allowed SIO Screen](#)
- [Changing a Blocked OPC Screen](#)
- [Changing an Allowed OPC Screen](#)

Procedure

1. Display the allowed CGPA screens in the database using the `rtrv-scr-cgpa` command.

The following is an example of the possible output.

```
r1ghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED CGPA
SR   REF  RULES
GW11 YES   1
GW13 YES   1
GW14 YES   1
IEC  YES   2
WRD2 YES   1
WRD4 YES   9
```

From the `rtrv-scr-cgpa` output, display the allowed CGPA screen you wish to remove using the `rtrv-scr-cgpa` command with the screening reference name. For this example, enter the `rtrv-scr-cgpa:sr=gw14` command. The following is an example of the possible output.

```
rtrv-scr-cgpa:sr=gw14
```

The following is an example of the possible output.

```
r1ghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED CGPA
SR   NI      NC      NCM      SSN      RI      SCCPMT  NSFI  NSR/ACT
GW14 003      003      003      253      GT      009      TT    GW17
```

2. Enter the commands in the [Verifying the Gateway Screening Configuration](#) section to verify that the screen being removed is not referenced by other screens in the database.

If the screen being removed is referenced by other screens, perform the procedures shown in the [Gateway Screening Configuration Procedures](#) section to change the NSFI of those screens to reference other screens or change the NSFI of these screens to STOP.

3. Remove the allowed CGPA screen from the database using the `dlt-scr-cgpa` command.

The current values for the `ni`, `nc`, `ncm`, `zone`, `area`, `id`, `npc`, `msa`, `ssa`, `sp`, `ri`, `ssn`, or `sccpmt` parameters must be entered exactly as shown in the `rtrv-scr-cgpa` output.

To remove an entry containing either an ITU-I or a 14-bit ITU-N spare point code, the **pcst=s** parameter must be specified with the **dlt-scr-cgpa** command.

To remove an entry containing either an ITU-I or a 14-bit ITU-N non-spare point code, the **pcst** parameter does not have to be specified with the **dlt-scr-cgpa** command. If the **pcst** parameter is specified, the value must be **none**.

For this example, enter this command.

```
dlt-scr-cgpa:sr=gw14:ni=003:nc=003:ncm=003:ssn=253:sccpmt=009
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
DLT-SCR-CGPA: SCREEN SET AFFECTED - GW14 0% FULL
DLT-SCR-CGPA: MASP A - COMPLTD
```

4. Verify the changes using the **rtrv-scr-cgpa** command with the screening reference name used in step 3.

For this example, enter this command.

```
rtrv-scr-cgpa:sr=gw14
```

The following is an example of the possible output.

```
E2573 Cmd Rej: SR or NSR does not reference an existing SR
```


This message shows that the specified screening reference name is not in the database and the action of the **dlt-scr-cgpa** command in step 3 was successful. If the specified screening reference name contained more than one entry when the **dlt-scr-cgpa** command was executed in step 3, the **rtrv-scr-cgpa:sr=** command output would show the remaining entries in the screening reference instead of error message E2573.


5. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 6-3. Removing an Allowed Calling Party Address Screen

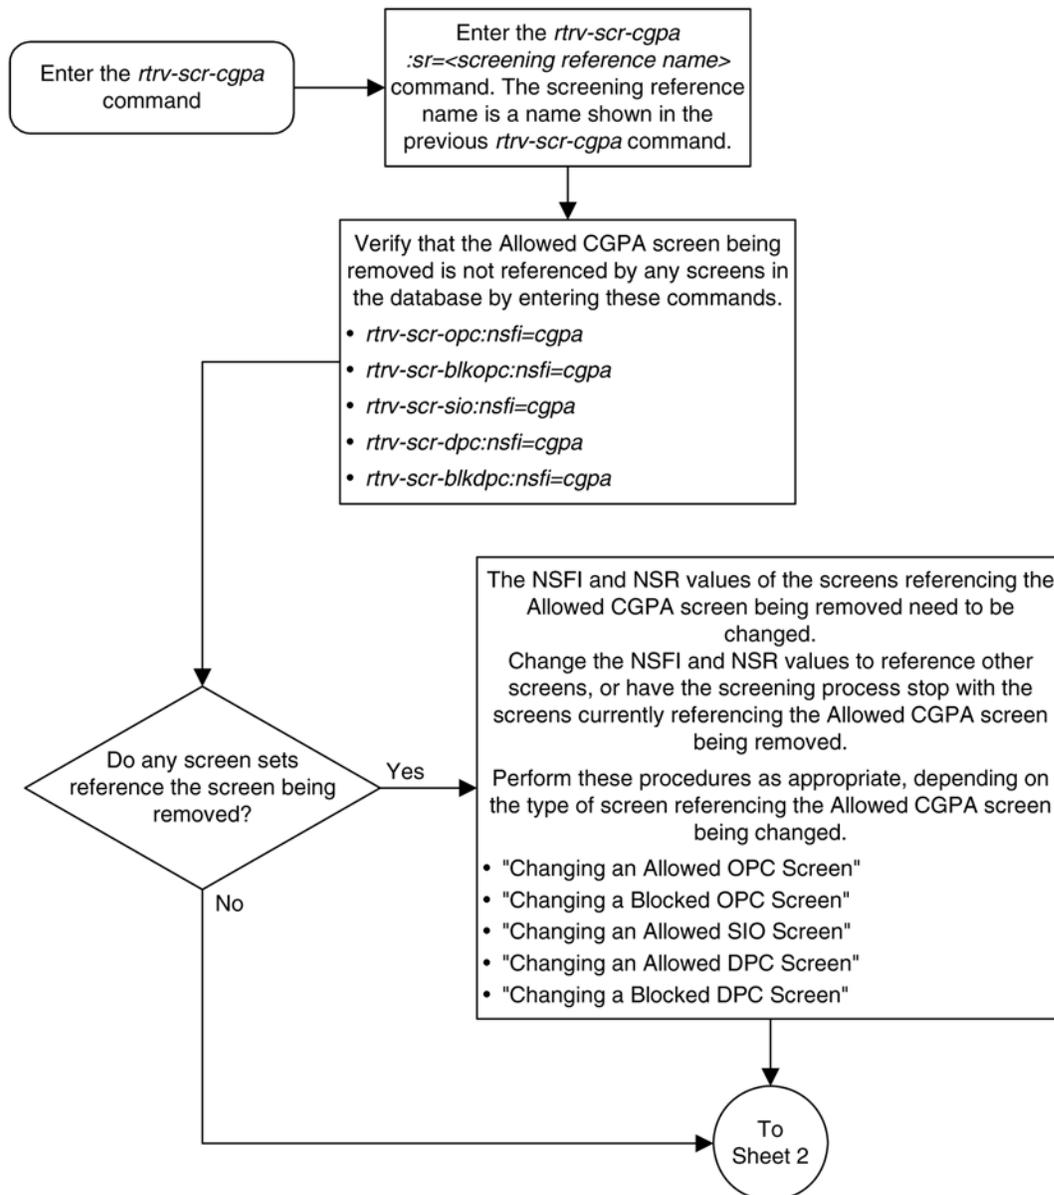

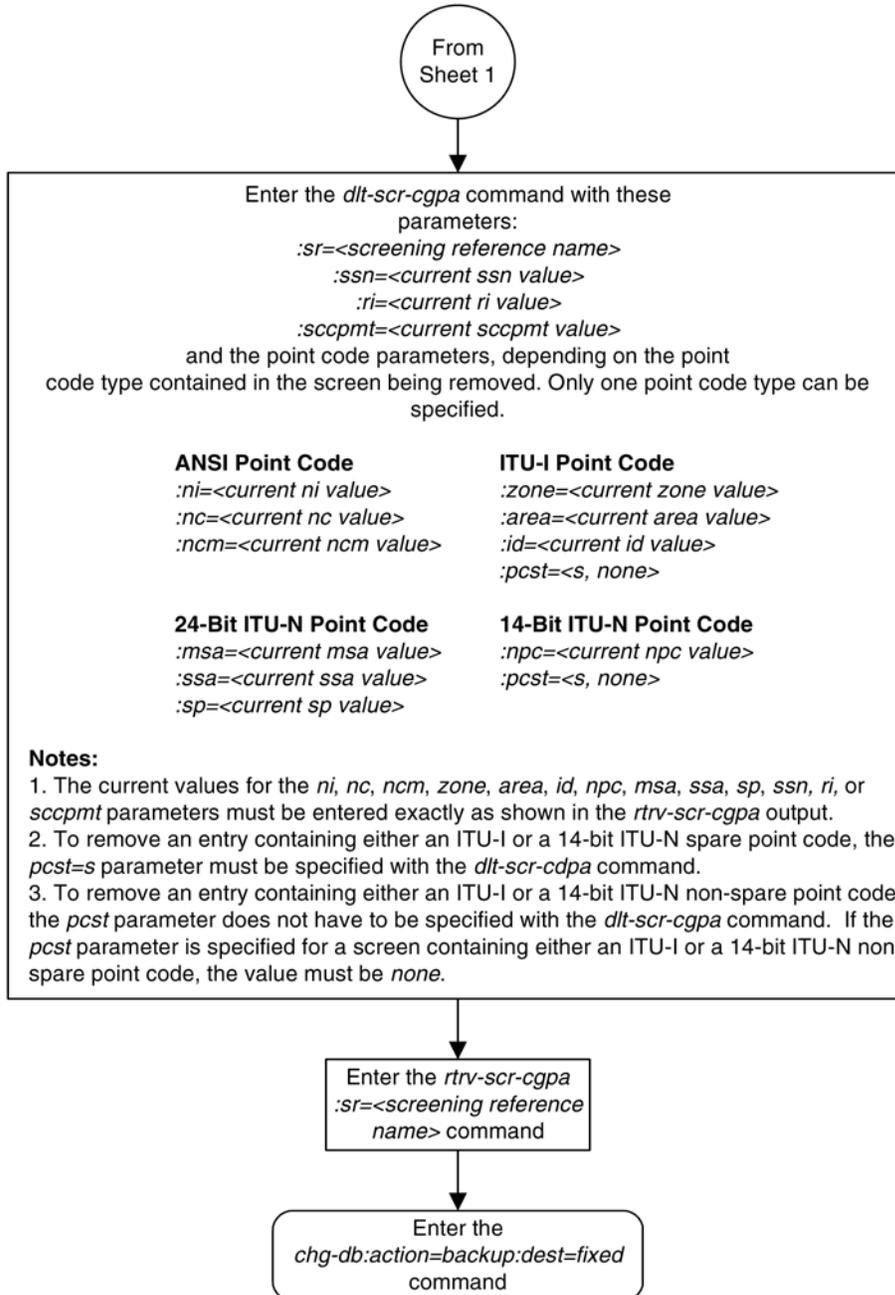

Changing an Allowed Calling Party Address Screen

This procedure is used to change the attributes of an allowed calling party address (CGPA) screen in the database using the **chg-scr-cgpa** command. The parameters used by the **chg-scr-cgpa** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The example in this procedure is used to change the point code 003-003-003 for the allowed CGPA screen **gw14** to 230-230-230 and change the subsystem number from 253 to 150.

NOTE: If you using multiple-part ITU national point codes with gateway screening, see the [14-Bit ITU National Point Code Formats](#) section.

The allowed CGPA screen can reference one of the following screens.

- Allowed TT
- Allowed CDPA

Verifying the Gateway Screening Configuration

Enter the following commands to verify that these screens are in the database.

- `rtrv-scr-tt:all=yes`
- `rtrv-scr-cdpa:all=yes`

Gateway Screening Configuration Procedures

If the desired screen is not in the database, perform one of these procedures to add the desired screen to the database or change an existing screen in the database.

- [Adding an Allowed Translation Type Screen](#)
- [Adding an Allowed Called Party Address Screen](#)
- [Changing an Allowed Translation Type Screen](#)
- [Changing an Allowed Called Party Address Screen](#)

Specifying a Range of Values

A range of values can be specified for the point code parameters **ni**, **nc**, or **ncm**.

If a range of values is specified for any of these parameters, and the value of the other parameters match existing values for the screening reference name, the range of values for the point code parameter cannot include any values for that parameter that are currently provisioned for the screening reference name.

For example, screening reference name **scr1** contains these entries:

SR	NI	NC	NCM	SSN	RI	SCCPMT	NSFI	NSR/ACT
SCR1	240	001	010	012	DPC	009	STOP	-----
SCR1	241	010	020	*	GT	017	TT	SCR1

Another entry for screening reference **scr1** with the **ni** value of 240 and the **nc** value of 001 cannot be specified if the range of values for the **ncm** parameter includes the value 010.

The ANSI point code parameter values can be specified as a single value, a range of values, or with an asterisk (*). The asterisk specifies all possible values for the **ni**, **nc**, and **ncm** parameters. [Table 6-6](#) shows the valid combinations of these parameter values.

Table 6-6. Valid Value Combinations for ANSI Point Code Parameters

NI	NC	NCM
Single Value	Single Value	Single Value
Single Value	Single Value	Range of Values
Single Value	Single Value	Asterisk

NI	NC	NCM
Single Value	Range of Values	Asterisk
Single Value	Asterisk	Asterisk
Range of Values	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

A range of values can also be specified for an ITU-I or 24-bit ITU-N point code parameter using a combination of asterisks (*) and single values for the point code parameters. [Table 6-7](#) shows the valid combinations of the ITU-I parameter values. [Table 6-8](#) shows the valid combinations of the 24-bit ITU-N parameter values.

Table 6-7. Valid Value Combinations for ITU-I Point Code Parameters

ZONE	AREA	ID
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Table 6-8. Valid Value Combinations for 24-Bit ITU-N Point Code Parameters

MSA	SSA	SP
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Procedure

1. Display the allowed CGPA screens in the database using the **rtrv-scr-cgpa** command.

The following is an example of the possible output.

```
r1ghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED CGPA
SR   REF  RULES
GW11 YES   1
GW13 YES   1
GW14 YES   1
IEC  YES   2
WRD2 YES   1
WRD4 YES   9
```

From the **rtrv-scr-cgpa** output, display the allowed CGPA screen you wish to change using the **rtrv-scr-cgpa** command with the screening reference name. For this example, enter this command.

```
rtrv-scr-cgpa:sr=gw14
```

The following is an example of the possible output.

```
r1ghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
```

```
SCREEN = ALLOWED CGPA
SR   NI      NC      NCM      SSN      RI      SCCPMT  NSFI      NSR/ACT
GW14 003     003     003     253     GT      009     TT        GW17
```

If a gateway screening stop action set is to be assigned to the allowed CGPA screen being added to the database, go to step 2.

Step 2 verifies the gateway screening stop action set names in the database. The gateway screening stop action set names are assigned only if the NSFI of the screen being changed in this procedure is STOP. If the NSFI of the screen will be changed to STOP, but a gateway screening stop action set name will not be assigned to the screen, skip steps 2 and 3 and go to step 4. If the NSFI of the screen will not be STOP, skip step 2 and go to step 3.

2. Display the gateway screening stop action sets in the database with the `rtrv-gws-actset` command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
ACT ACT
ID  NAME  1    2    3    4    5    6    7    8    9    10
--  -----
1   copy  copy
2   rdct  rdct
3   cr    copy rdct
4   cnf   cnf
5   cpcnf copy cnf
6   cnf   rdct
7   cpcnf copy cnf rdct
```

GWS action set table is (7 of 16) 44% full

If the required gateway screening stop action set is not in the database, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure to configure the required gateway screening stop action set.

NOTE: If the NSFI of the screen being changed in this procedure will be STOP, or if the NSFI of the screen is not being changed, skip step 3 and go to step 4.

3. Enter the commands in the [Verifying the Gateway Screening Configuration](#) section to verify that the screen that will be specified by the NSFI/NSR parameter combination in step 5 is in the database.

If the desired screen is not in the database, perform one of the procedures shown in the [Gateway Screening Configuration Procedures](#) section to add the desired screen to the database or change an existing screen in the database.

NOTE: If any of these conditions apply to this procedure, skip this step and go to step 5:

- The point code in the screen is not being changed.
- The screen being changed contains either an ANSI or 24-bit ITU-N point code.
- The ITU-I or 14-bit ITU-N non-spare point code in the screen is not being changed to an ITU-I or 14-bit ITU-N spare point code.
- The point code in the screen is an ITU-I or 14-bit ITU-N spare point code or the screening reference contains other screens with ITU-I or 14-bit ITU-N spare point codes.

4. Display the status of the ITU National and International Spare Point Code Support feature by entering the `rtrv-ctrl-feat` command with the ITU National and International Spare Point Code Support feature part number.

Enter this command.

```
rtrv-ctrl-feat:partnum=893013601
```

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
The following features have been permanently enabled:
```

```
Feature Name          Partnum  Status Quantity
Spare Point Code Support 893013601 on    ----
```

The following features have been temporarily enabled:

```
Feature Name          Partnum  Status Quantity  Trial Period Left
Zero entries found.
```

The following features have expired temporary keys:

```
Feature Name          Partnum
Zero entries found.
```

If the ITU National and International Spare Point Code Support feature is enabled, go to step 5.

If the ITU National and International Spare Point Code Support feature is not enabled, perform the “Activating the ITU National and International Spare Point Code Support Feature” procedure in the *Database Administration Manual - SS7* to enable the ITU National and International Spare Point Code Support feature as required. After the feature has been enabled, go to step 5.

5. Change the attributes of an allowed CGPA screen using the **chg-scr-cgpa** command.

If a gateway screening stop action is to be assigned to the allowed CGPA screen being changed, enter the **chg-scr-cgpa** command with the **nsfi=stop** parameter and the **actname** parameter with the name of a gateway screening stop action set shown in the output of the **rtrv-gws-actset** command executed in step 2.



CAUTION: The EAGLE 5 ISS does not support redirecting MSUs for the DTA feature or intercepting ISUP IAM messages for the Calling Name Conversion Facility feature from the allowed CGPA screen. Gateway screening stop action sets containing either the RDCT (redirect) or CNCF (calling name conversion facility) stop actions should not be assigned to the allowed CGPA screen. If a gateway screening stop action set containing the RDCT or CNCF stop actions is specified with the chg-scr-cgpa command, unsolicited information message (UIM) 1126 is generated when the attempt is made to redirect MSUs from the allowed CGPA screen. Unsolicited information message (UIM) 1216 is generated when ISUP IAM MSUs are intercepted from the allowed CGPA screen. For more information on UIMs 1126 and 1216, go to the *Maintenance Manual*.

The current values for the **ni**, **nc**, **ncm**, **zone**, **area**, **id**, **npc**, **msa**, **ssa**, **sp**, **ssn**, **ri**, and **sccpmt** parameters must be entered exactly as shown in the **rtrv-scr-cgpa** output in step 1.

The following list contains the values for **nni**, **nnc**, **nncm**, **nzone**, **narea**, **nid**, **nnpc**, **nssn**, **nmsa**, **nssa**, **nsp**, **nri**, and **nsccpmt** parameters:

- nni – 0 - 255 or an asterisk (*)
- nnc – 0 - 255 or an asterisk (*)
- nncm – 0 - 255 or an asterisk (*)
- nzone – 0 - 7 or an asterisk (*)
- narea – 0 - 255 or an asterisk (*)
- nid – 0 - 7 or an asterisk (*)
- nnpc – 1 - 16383 or an asterisk (*)

- nmsa – 0 - 255 or an asterisk (*)
- nssa – 0 - 255 or an asterisk (*)
- nsp – 0 - 255 or an asterisk (*)
- nssn – 0 - 255 or an asterisk (*)
- nri – gt, dpc or an asterisk (*)
- nsccpmt – 9, 10, 17, 18 or an asterisk (*)

NOTE: The **nri**, **nsfi**, and **nsr** parameters can be specified only as shown in [Table 6-9](#).

Table 6-9. CGPA Parameter Combinations

New or Current RI Value	NSFI	NSR
GT	TT, STOP	Must be specified if NSFI=TT
DPC	CDPA, STOP	Must be specified if NSFI=CDPA
*	TT, CDPA, STOP	Must be specified if NSFI=TT or NSFI=CDPA

A range of values can be specified for the **nni**, **nnc**, and **nncm** parameters. See the [“Specifying a Range of Values”](#) section for more information on how the asterisk and a range of values are used for the **nni**, **nnc**, and **nncm** parameters.

To change an ITU-I or 14-bit ITU-N spare point code to a non-spare point code, both the **pcst=s** and **npcst=none** parameters must be specified with the **chg-scr-cgpa** command.

To change an ITU-I or 14-bit ITU-N non-spare point code to a spare point code, the **npcst=s** parameter must be specified with the **chg-scr-cgpa** command. The **pcst** parameter does not have to be specified.

If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N spare point code, the **pcst=s** parameter must be specified with the **chg-scr-cgpa** command.

If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N non-spare point code, the **pcst** parameter does not have to be specified with the **chg-scr-cgpa** command. If the **pcst** parameter is specified for a screen containing either an ITU-I or 14-bit ITU-N non-spare point code, the **pcst** parameter value must be **none**.

For this example, enter this command.

```
chg-scr-cgpa:sr=gw14:ni=003:nc=003:nccm=003:ssn=253:sccpmt=009 :nni=230:nnc=230:nncm=230:nssn=150
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
CHG-SCR-CGPA: SCREEN SET AFFECTED - GW14 1% FULL
CHG-SCR-CGPA: MASP A - COMPLTD
```

6. Verify the changes using the **rtrv-scr-cgpa** command with the screening reference name used in step 5.

For this example, enter this command.

rtrv-scr-cgpa:sr=gw14

The following is an example of the possible output.

```

rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED CGPA
SR   NI      NC      NCM      SSN      RI      SCCPMT  NSFI    NSR/ACT
GW14 230     230     230     150     GT      009     TT      GW17
    
```


- Backup the new changes using the **chg-db:action=backup:dest=fixed** command.


The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.


```

BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
    
```

Flowchart 6-4. Changing an Allowed Calling Party Address Screen

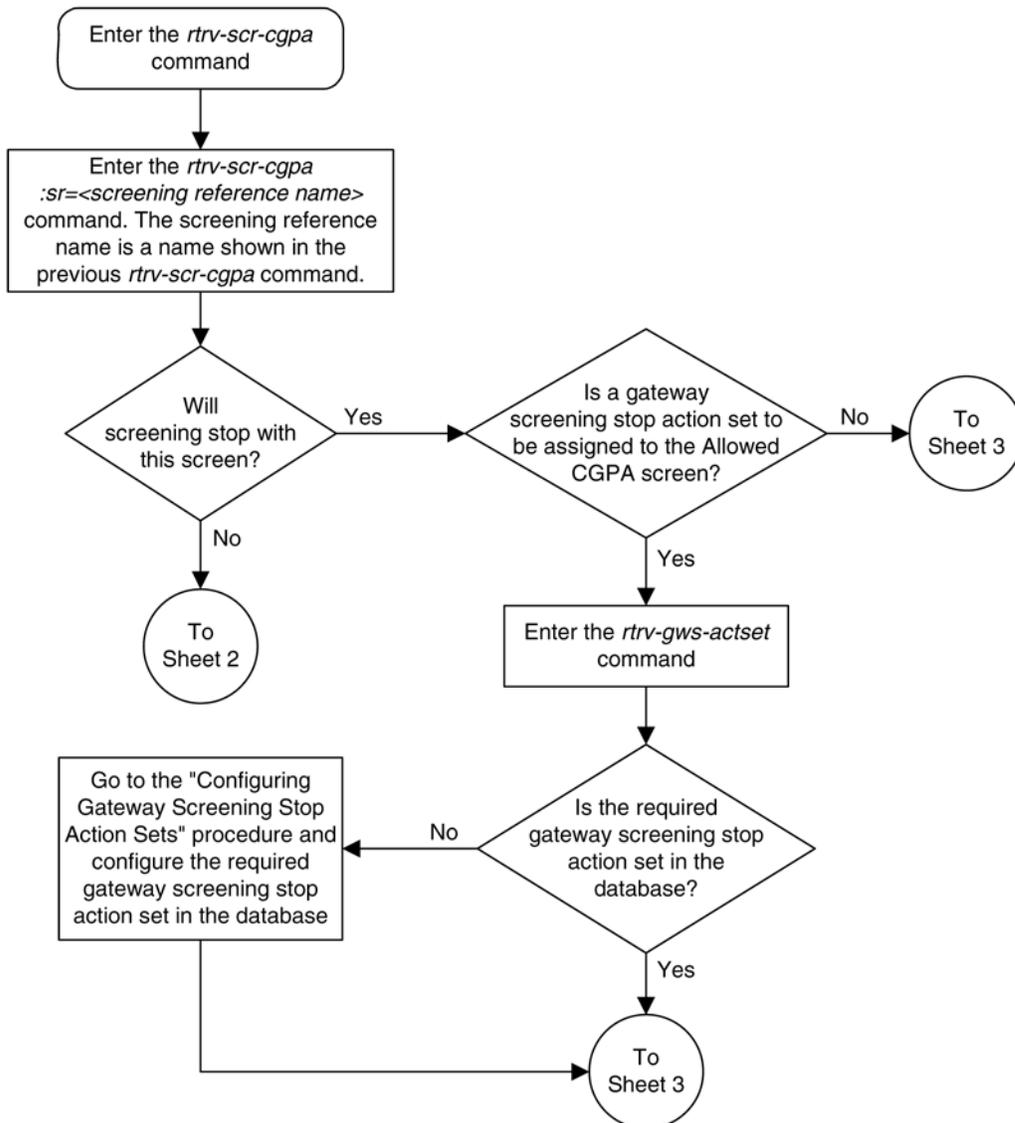

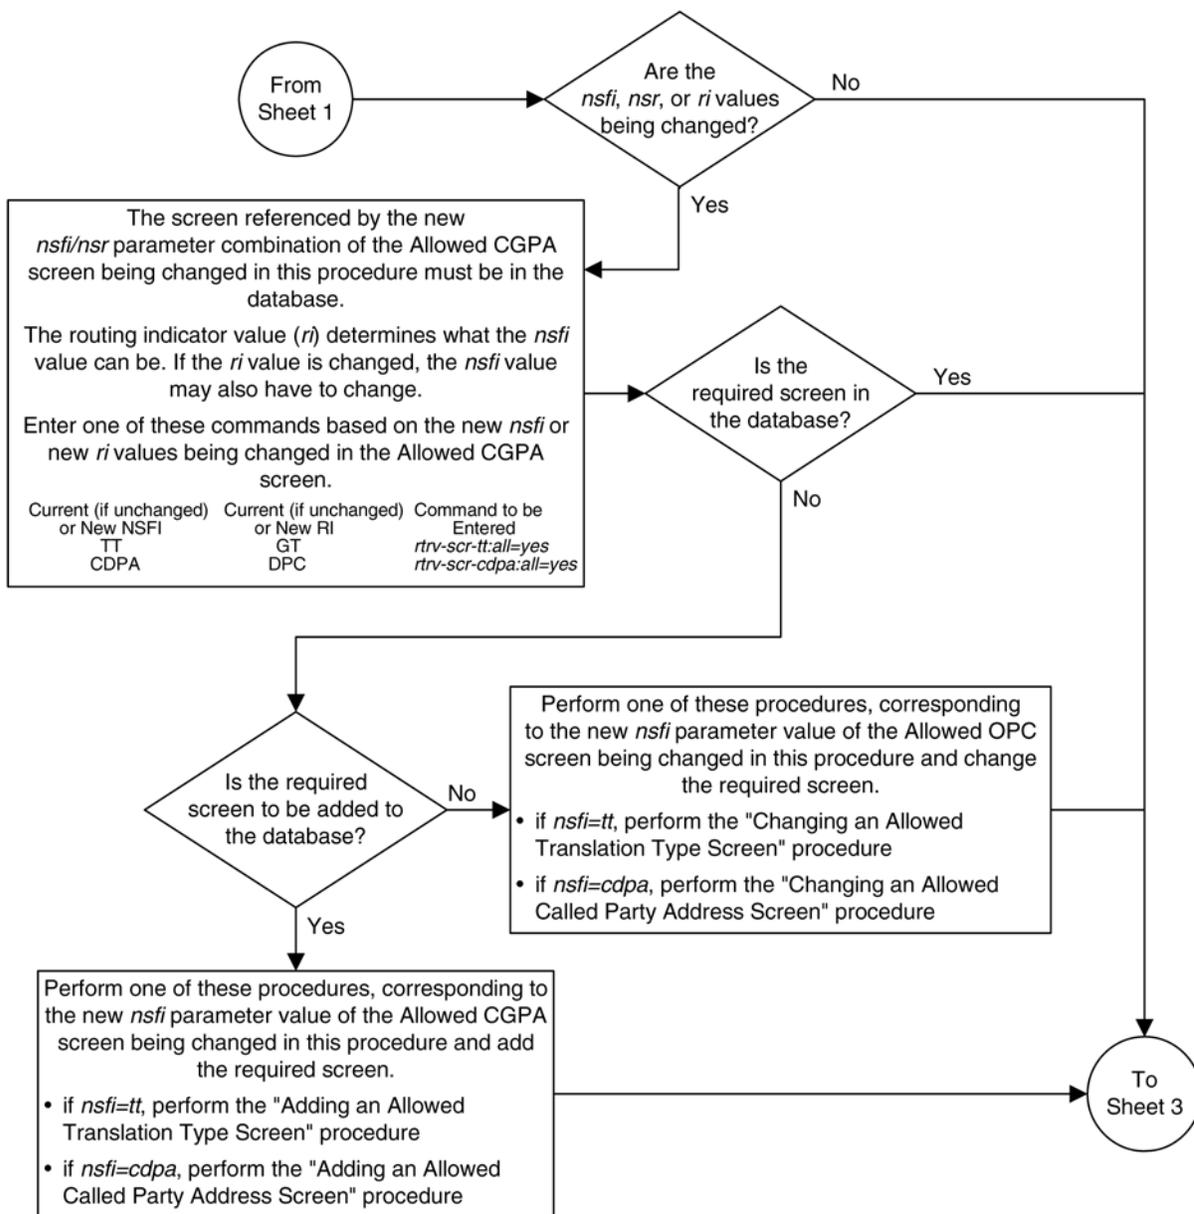

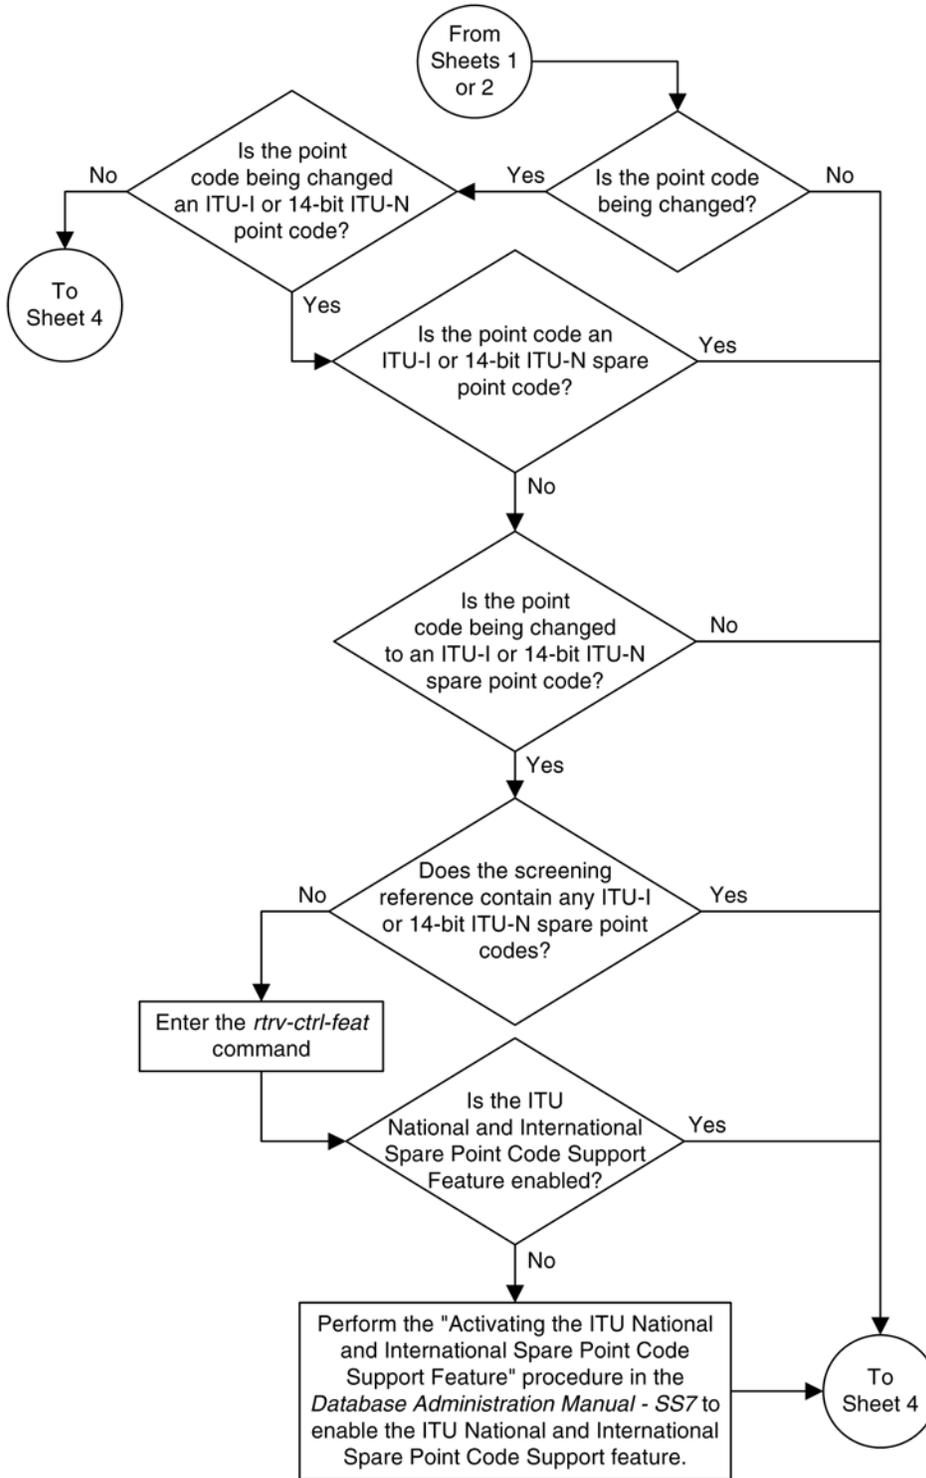



Enter the *chg-scr-cgpa* command with these mandatory parameters:

```

:sr=<screening reference name>
:ssn=<current ssn value>
:ri=<current ri value>
:sccpmt=<current sccpmt value>
    
```

and the point code parameters, depending on the point code type contained in the screen being changed. Only one point code type can be specified.

ANSI Point Code	ITU-I Point Code	14-Bit ITU-N Point Code	24-Bit ITU-N Point Code
:ni=<current ni value>	:zone=<current zone value>	:npc=<current npc value>	:msa=<current msa value>
:nc=<current nc value>	:area=<current area value>	:pcst=<s, none>	:ssa=<current ssa value>
:ncm=<current ncm value>	:id=<current id value>		:sp=<current sp value>
	:pcst=<s, none>		

At least one of these optional parameters must be specified with the *chg-scr-cgpa* command.

```

:nssn=<0-255, *>
:nri=<gt, dpc, *>
:nsccpmt=<9, 10, 17, 18>
:nsfi=<tt, cdpa, stop>
:nsr=<next screening reference>
:actname=<GWS stop action set name>
    
```

If the new point code code parameters are specified, they must be of the same type as the current point code values specified in the *chg-scr-cgpa* command.

ANSI Point Code	ITU-I Point Code	14-Bit ITU-N Point Code	24-Bit ITU-N Point Code
:nni=<0-255, *>	:nzone=<0-7, *>	:nnpc=<1-16383, *>	:nmsa=<0-255, *>
:nnc=<0-255, *>	:narea=<0-255, *>	:npcst=<s, none>	:nssa=<0-255, *>
:nncm=<0-255, *>	:nid=<0-7, *>		:nsp=<0-255, *>
	:npcst=<s, none>		

(See the Notes on Sheet 5)

Enter the *rtv-scr-cgpa*
:sr=<screening reference name> command

Enter the
chg-db:action=backup:dest=fixed
command

Notes:

1. A range of values can be specified for the *nni*, *nnc*, or *nncm* parameters by inserting double ampersands (&&) between the parameter values defining the range. For example, to specify the range 025 to 200 for the *nni* parameter, enter 025&&200 for the *nni* parameter value.
 2. The asterisk (*) specifies the entire range of values for that parameter.
- For more information about specifying a range of values and about using the asterisk, see the "Gateway Screening Attributes" section in Chapter 2 and the "Specifying a Range of Values" section in this procedure.
3. If either the *nsfi=<tt or cdpa>* or *nsr* parameters are specified, the other parameter must be specified.
 4. If the *nsfi=stop* parameter is specified, or if the current *nsfi* value is *stop* and is not being changed, the *nsr* parameter cannot be specified.
 5. The *actname* parameter can be specified only when the *nsfi* value is *stop* (either the current *nsfi* value is *stop* and not being changed, or if the *nsfi* value is being changed to *stop*). The *actname* parameter is optional. If the *actname* parameter is specified, the *actname* parameter value is one of the gateway screening stop action set names shown in the *rtrv-gws-actset* output on Sheet 1.
 6. The *nri=gt* parameter can be specified only if the *nsfi* value is TT. If the *nsfi=tt* parameter is specified, the *ri* value must be GT or *.
 7. The *nri=dpc* parameter can be specified only if the *nsfi* value is CDPA. If the *nsfi=cdpa* parameter is specified, the *ri* value must be DPC or *.
 8. The current values for the *ni*, *nc*, *nncm*, *zone*, *area*, *id*, *npc*, *ssn*, *ri*, and *sccpmt* parameters must be entered exactly as shown in the *rtrv-scr-cgpa* output.
 9. To change an ITU-I or 14-bit ITU-N spare point code to a non-spare point code, both the *pcst=s* and *npcst=none* parameters must be specified with the *chg-scr-cgpa* command.
 10. To change an ITU-I or 14-bit ITU-N non-spare point code to a spare point code, the *npcst=s* parameter must be specified with the *chg-scr-cgpa* command. The *pcst* parameter does not have to be specified.
 11. If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N spare point code, the *pcst=s* parameter must be specified with the *chg-scr-cgpa* command.
 12. If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N non-spare point code, the *pcst* parameter does not have to be specified with the *chg-scr-cgpa* command. If the *pcst* parameter is specified for a screen containing either an ITU-I or 14-bit ITU-N non-spare point code, the *pcst* parameter value must be *none*.

Allowed Affected Destination Field (DESTFLD) Screen Configuration

Introduction	7-1
Adding an Allowed Affected Destination Field Screen	7-6
Removing an Allowed Affected Destination Field Screen	7-13
Changing an Allowed Affected Destination Field Screen	7-17

Introduction

The Affected Destination Field screen identifies the point code in the affected destination field, the concerned signaling point code of incoming MTP network management messages from another network that are allowed into the EAGLE 5 ISS. The gray shaded areas in [Figure 7-1](#) shows the fields of the SS7 message that are checked by the Affected Destination Field screening function.

Network management messages contain the entry 0 in the service indicator field of the SIO. This is the last screen in the MTP portion of the gateway screening process. This **nsfi** for this screen has only one value, **stop**.

NOTE: Screening of the affected destination field can also be performed without configuring an allowed affected destination field screen by specifying the `destfld=yes` parameter when configuring a screen set. For more information on the screen set `destfld=yes` parameter, see the [Automatic Destination Field Screening](#) section.

If no match is found, the MTP network management message is not allowed into the EAGLE 5 ISS. If a match is found, the message is allowed into the EAGLE 5 ISS for further processing.

If the **copy** gateway screening stop action is specified, the message is processed and a copy of the message is sent by the STPLAN feature to an external application.


If the **rdct** (redirect) gateway screening stop action is specified, the message is diverted from the original destination and sent to another destination with the Database Transport Access feature, specified by global title translation, for further processing.


If the Calling Name Conversion Facility (CNCF) feature is on and the **cncf** gateway screening stop action is specified, the PIP parameter in the incoming ISUP IAM message is converted to the GN parameter. The GN parameter in the incoming ISUP IAM message is converted to the PIP parameter. The message is then sent to the node specified by the DPC in the routing label in the message. For more information on the Calling Name Conversion Facility feature, see [Chapter 14 Calling Name Conversion Facility \(CNCF\) Configuration](#) .

These network management messages are screened by the Allowed Affected Destination Field: TFP, TFA, TFR, TFC, UPU, and SRST (RSP, RSR). Any MSU that is not one of these network management message types, or does not contain a service indicator of 0 in the SIO field and reaches this screen in the gateway screening process automatically passes gateway screening and is allowed into the EAGLE 5 ISS.

[Flowchart 7-24](#) shows the screening action of the allowed affected destination field screen.

Flowchart 7-1. Allowed Affected Destination Screening Action

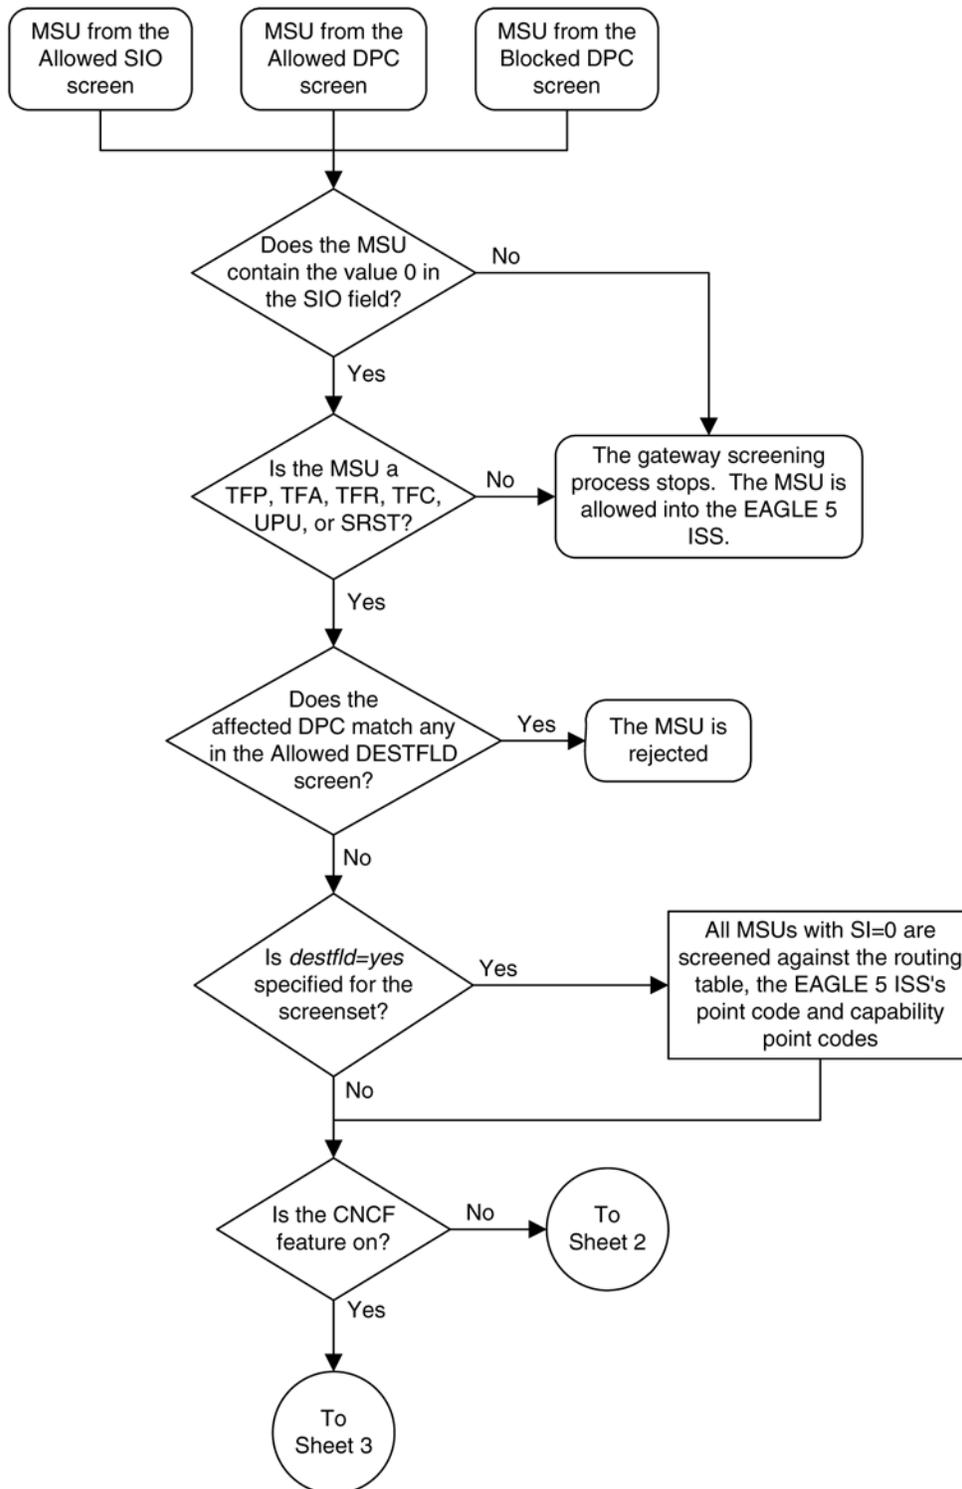

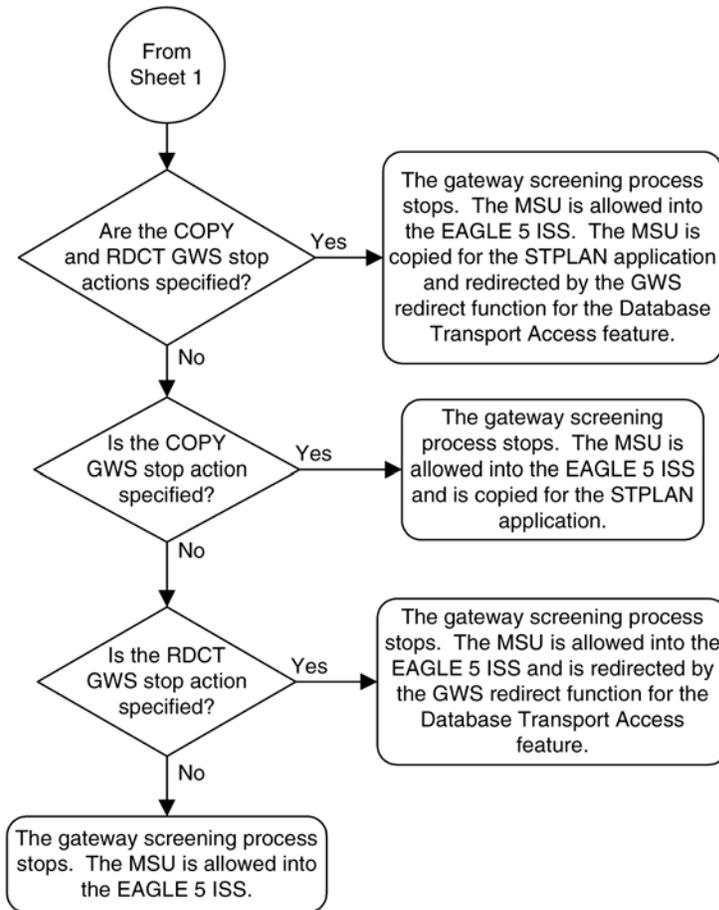


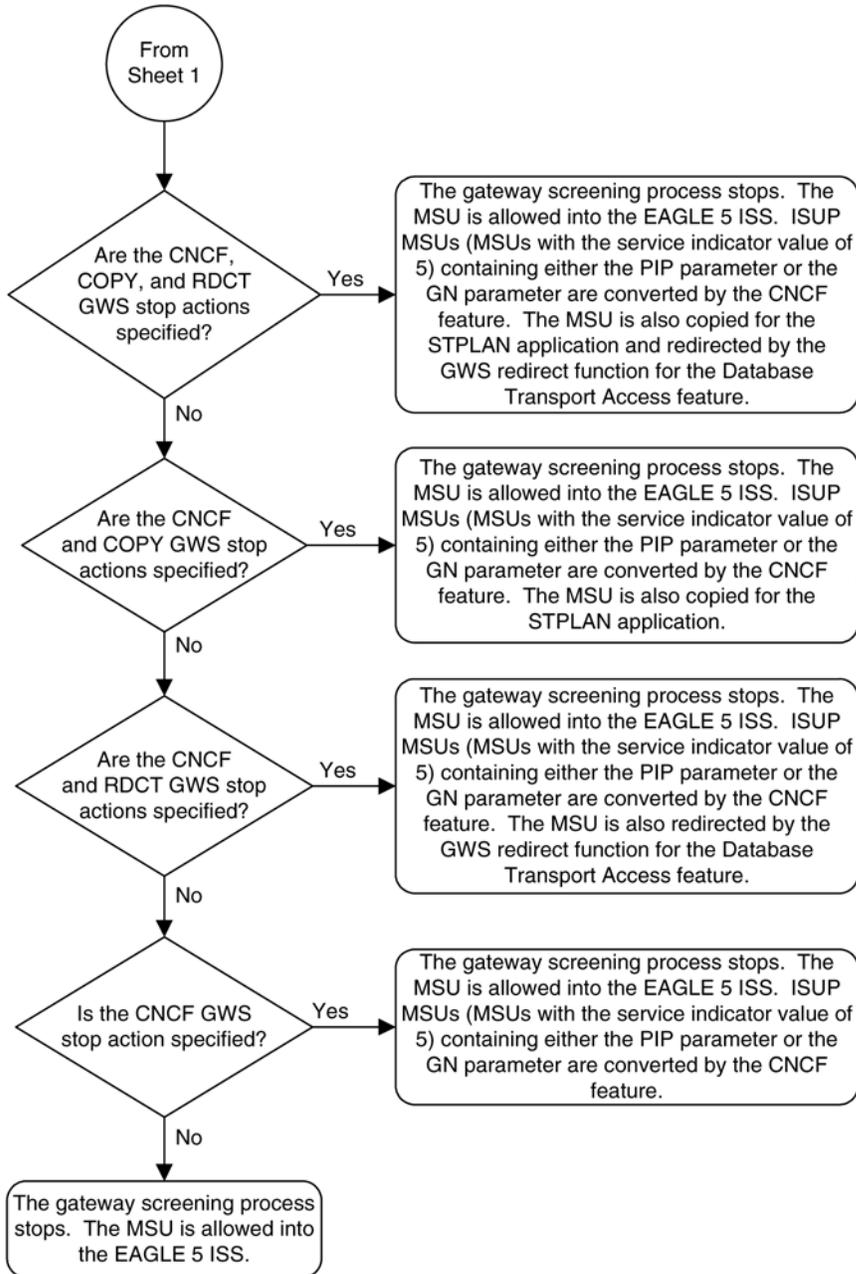


Figure 7-1. Allowed Affected Destination Field Screening Function

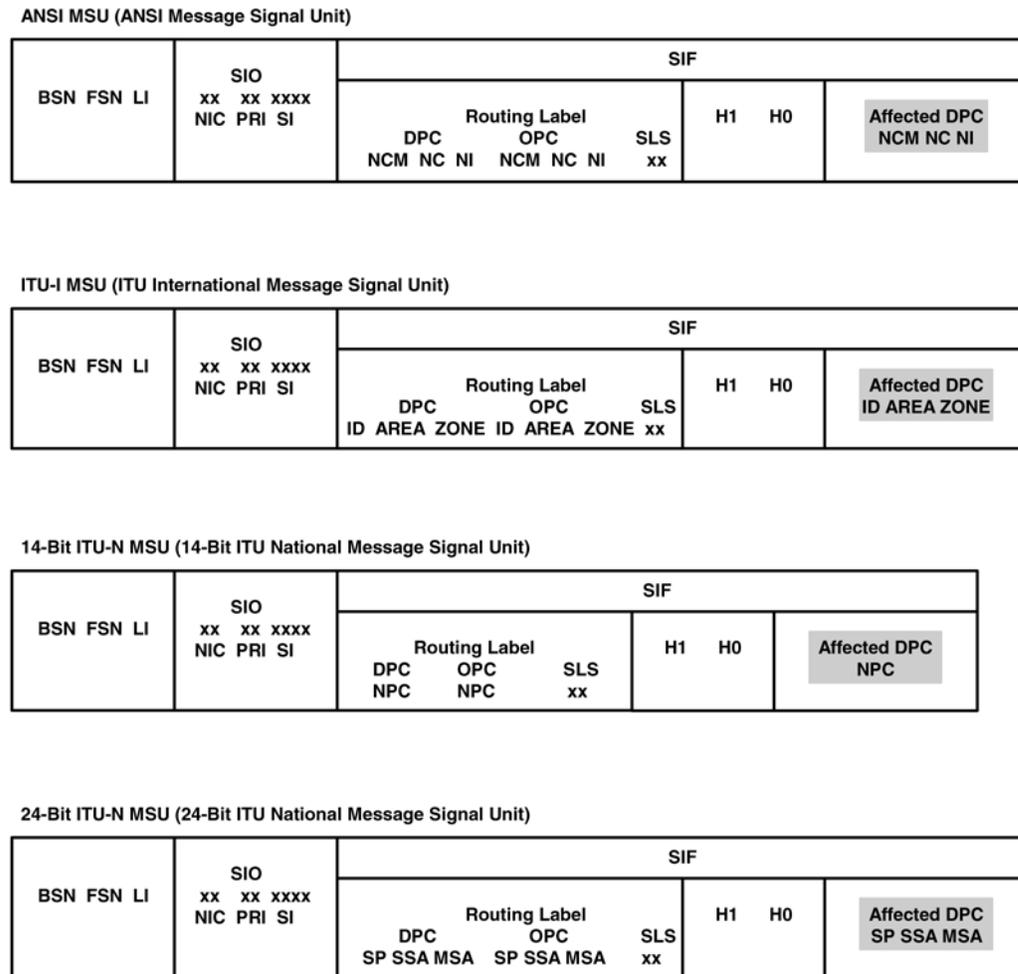

Adding an Allowed Affected Destination Field Screen

This procedure is used to add an allowed affected destination field (DESTFLD) screen to the database using the `ent-scr-destfld` command. The parameters used by the `ent-scr-destfld` command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The examples in this procedure are used to add the allowed DESTFLD screen data shown in [Table 7-1](#) and based on the example configuration shown in [Figure 2-7](#).

Table 7-1. Example Gateway Screening Allowed DESTFLD Configuration Table

Screening Reference	NI	NC	NCM	NSFI	ACTNAME
fld5	100	100	100	stop	CR

NOTE: If you using multiple-part ITU national point codes with gateway screening, see the [14-Bit ITU National Point Code Formats](#) section.

Specifying a Range of Values

A range of values can be specified for the point code parameters **ni**, **nc**, or **ncm**.

If a range of values is specified for any of these parameters, and the value of the other parameters match existing values for the screening reference name, the range of values for the point code parameter cannot include any values for that parameter that are currently provisioned for the screening reference name.

For example, screening reference name **scr1** contains these entries:

SR	NI	NC	NCM	NSFI	NSR/ACT
SCR1	240	001	010	STOP	-----
SCR1	241	010	020	STOP	-----

Another entry for screening reference **scr1** with the **ni** value of 240 and the **nc** value of 001 cannot be specified if the range of values for the **ncm** parameter includes the value 010.

The ANSI point code parameter values can be specified as a single value, a range of values, or with an asterisk (*). The asterisk specifies all possible values for the **ni**, **nc**, and **ncm** parameters. [Table 7-2](#) shows the valid combinations of these parameter values.

Table 7-2. Valid Value Combinations for ANSI Point Code Parameters

NI	NC	NCM
Single Value	Single Value	Single Value
Single Value	Single Value	Range of Values
Single Value	Single Value	Asterisk
Single Value	Range of Values	Asterisk
Single Value	Asterisk	Asterisk
Range of Values	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

A range of values can also be specified for an ITU-I or 24-bit ITU-N point code parameter using a combination of asterisks (*) and single values for the point code parameters. [Table 7-3](#) shows the valid combinations of the ITU-I parameter values. [Table 7-4](#) shows the valid combinations of the 24-bit ITU-N parameter values.

Table 7-3. Valid Value Combinations for ITU-I Point Code Parameters

ZONE	AREA	ID
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Table 7-4. Valid Value Combinations for 24-Bit ITU-N Point Code Parameters

MSA	SSA	SP
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Procedure

1. Verify that the gateway screening feature is on, by entering the **rtrv-feat** command.

If the gateway screening feature is on, the **GWS** field is set to **on**.

NOTE: The `rtrv-feat` command output contains other fields that are not used by this procedure. If you wish to see all the fields displayed by the `rtrv-feat` command, see the `rtrv-feat` command description in the *Commands Manual*.

If the gateway screening feature is on, shown by the entry **GWS = on** in the **rtrv-feat** command output, skip step 2, and go to step 3.

- Turn the gateway screening feature on by entering this command.

chg-feat:gws=on

NOTE: Once the gateway screening feature is turned on with the `chg-feat` command, it cannot be turned off.

The gateway screening feature must be purchased before you turn this feature on with the `chg-feat` command. If you are not sure if you have purchased the gateway screening feature, contact your Tekelec Sales Representative or Account Representative.

When the **chg-feat** has successfully completed, this message should appear.

```
rlghncxa03w 06-10-28 11:43:04 GMT EAGLE5 36.0.0
CHG-FEAT: MASP A - COMPLTD
```

- Display all allowed DESTFLD screens in the database using the **rtrv-scr-destfld** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED DESTFLD
SR   REF  RULES
IEC  YES   2
WRD2 YES   1
WRD4 YES   9
```

If the screening reference names that you wish to add with this procedure are not shown in the **rtrv-scr-destfld** command output, go to step 4. For this example, the screening reference names are not shown. If these screening reference names are shown in the **rtrv-scr-destfld** command output, make sure the screening data you wish to enter is not already in the database by entering the **rtrv-scr-destfld** command with the screening reference name. For example, enter the **rtrv-scr-destfld:sr=iec** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED DESTFLD
SR   NI      NC      NCM      NSF1   NSR/ACT
IEC  240      001      010      STOP   -----
IEC  241      010      *        STOP   COPY
```

If a gateway screening stop action set is to be assigned to the allowed DESTFLD screen being added to the database, go to step 4. Otherwise, go to step 5.

- Display the gateway screening stop action sets in the database with the **rtrv-gws-actset** command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
ACT ACT  ACT ACT  ACT ACT  ACT ACT  ACT ACT
ID  NAME  1    2    3    4    5    6    7    8    9    10
```

```

-- -----
1  copy  copy
2  rdct  rdct
3  cr    copy rdct
4  cnf   cnf
5  cpcnf copy cnf
6  cnfcrd cnf rdct
7  cpcfrd copy cnf rdct

```

GWS action set table is (7 of 16) 44% full

If the required gateway screening stop action set is not in the database, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure to configure the required gateway screening stop action set.

NOTE: If the point code being added in this procedure is not an ITU-I or 14-bit ITU-N spare point code, skip this step and to step 6.

NOTE: If the point code being added in this procedure is an ITU-I or 14-bit ITU-N spare point code and the screening reference contains ITU-I or 14-bit ITU-N spare point codes, skip this step and go to step 6.

5. Display the status of the ITU National and International Spare Point Code Support feature by entering the **rtrv-ctrl-feat** command with the ITU National and International Spare Point Code Support feature part number.

Enter this command.

rtrv-ctrl-feat:partnum=893013601

This is an example of the possible output.

```

rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
The following features have been permanently enabled:

```

Feature Name	Partnum	Status	Quantity
Spare Point Code Support	893013601	on	----

The following features have been temporarily enabled:

Feature Name	Partnum	Status	Quantity	Trial Period Left
Zero entries found.				

The following features have expired temporary keys:

Feature Name	Partnum
Zero entries found.	

If the ITU National and International Spare Point Code Support feature is enabled, go to step 6.

If the ITU National and International Spare Point Code Support feature is not enabled, perform the “Activating the ITU National and International Spare Point Code Support Feature” procedure in the *Database Administration Manual - SS7* to enable the ITU National and International Spare Point Code Support feature as required. After the feature has been enabled, go to step 6.

6. Add a new allowed DESTFLD screen to the database using the **ent-scr-destfld** command.

If a gateway screening stop action is to be assigned to the allowed DESTFLD screen being changed, enter the **ent-scr-destfld** command with the **nsfi=stop** parameter and the **actname** parameter with the name of a gateway screening stop action set shown in the output of the **rtrv-gws-actset** command executed in step 4.

The following list contains the values for **ni**, **nc**, **ncm**, **zone**, **area**, **id**, **npc**, **msa**, **ssa**, and **sp** parameters:

- **ni** – 0 - 255 or an asterisk (*)
- **nc** – 0 - 255 or an asterisk (*)
- **ncm** – 0 - 255 or an asterisk (*)
- **zone** – 0 - 7 or an asterisk (*)
- **area** – 0 - 255 or an asterisk (*)
- **id** – 0 - 7 or an asterisk (*)
- **npc** – 1 - 16383 or an asterisk (*)
- **msa** – 0 - 255 or an asterisk (*)
- **ssa** – 0 - 255 or an asterisk (*)
- **sp** – 0 - 255 or an asterisk (*)

A range of values can be specified for the **ni**, **nc**, and **ncm** parameters. See the [“Specifying a Range of Values”](#) section for more information on how the asterisk and a range of values are used for the **ni**, **nc**, and **ncm** parameters.

To add a spare point code to the allowed DESTFLD screen, the **pcst=s** parameter must be specified. To add a non-spare point code to the allowed DESTFLD screen, the **pcst** parameter does not have to be specified. If the **pcst** parameter is specified for a screen containing an ITU-I or 14-bit ITU-N non-spare point code, the value must be **none**.

For this example, enter this command.

```
ent-scr-destfld:sr=fld5:ni=100:nc=100:ncm=100:nsfi=stop :actname=cr
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:29:30 GMT EAGLE5 36.0.0
ENT-SCR-DESTFLD: SCREEN SET AFFECTED - FLD5 1% FULL
ENT-SCR-DESTFLD: MASP A - COMPLTD
```

7. Verify the changes using the **rtrv-scr-destfld** command with the screening reference name used in step 6. For this example, enter this command.

```
rtrv-scr-destfld:sr=fld5
```

The following is an example of the possible output.


```
rlghncxa03w 06-10-25 15:30:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED DESTFLD
SR   NI      NC      NCM      NSFI   NSR/ACT
FLD5 100      100     100     STOP   CR
```


8. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 7-2. Adding an Allowed Affected Destination Field Screen

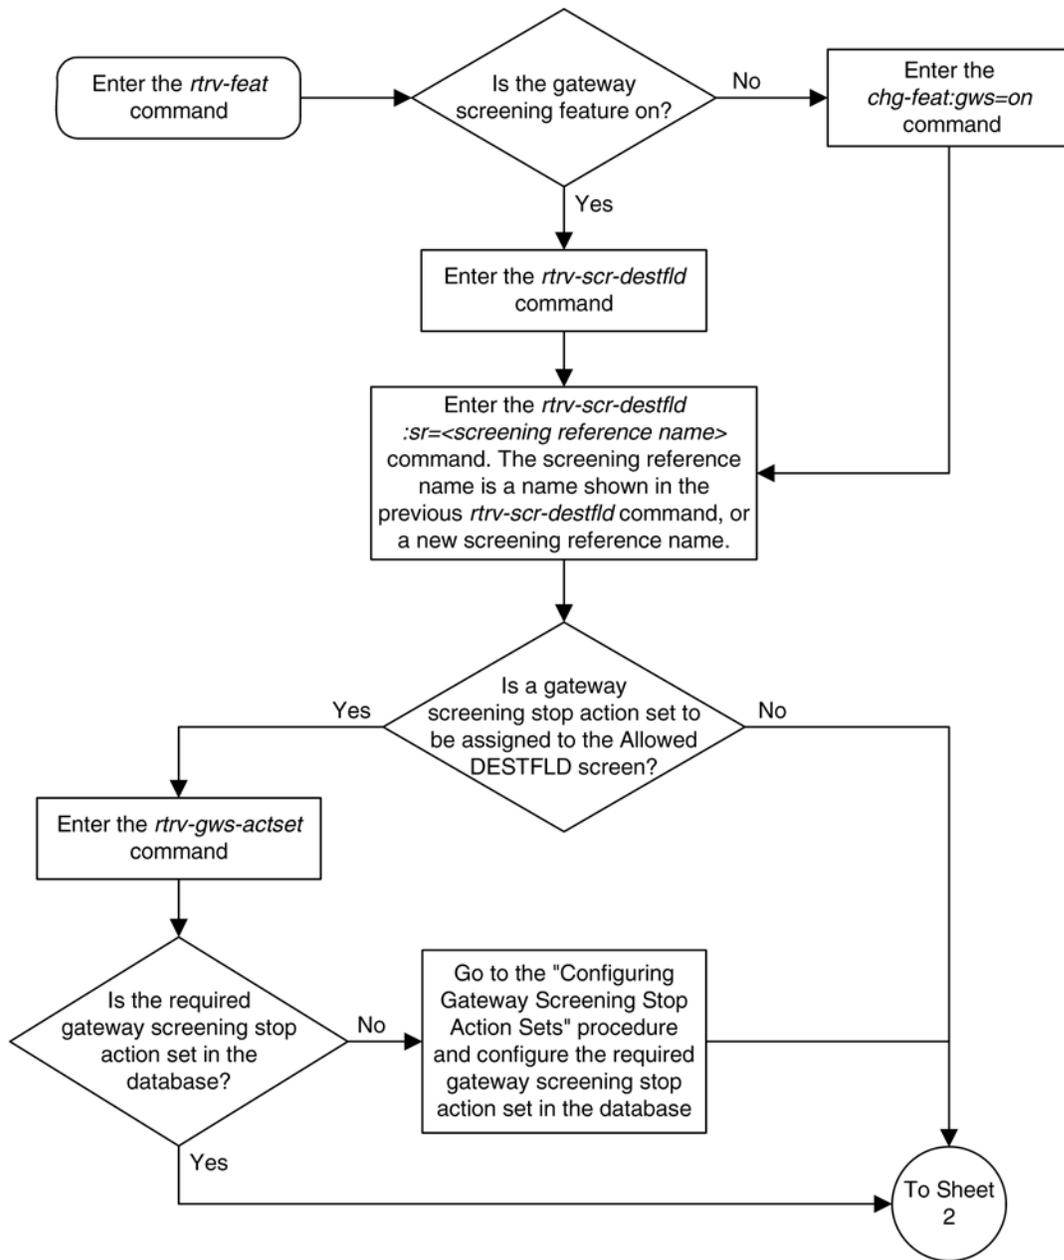

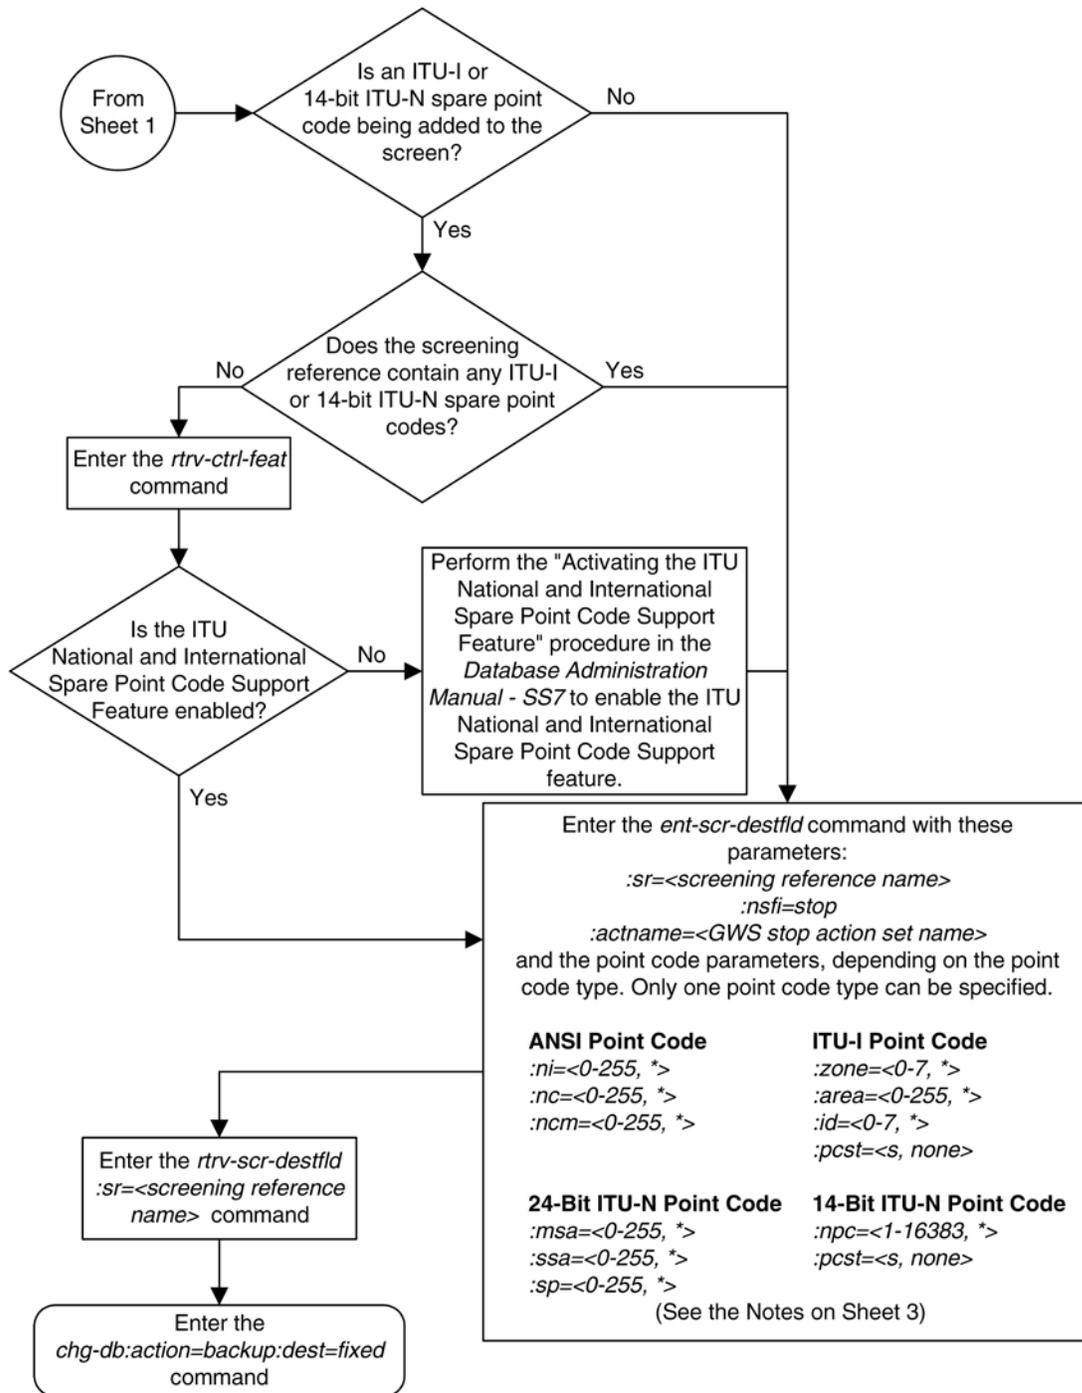

Notes:

1. A range of values can be specified for the *ni*, *nc*, or *ncm* parameters by inserting double ampersands (&&) between the parameter values defining the range. For example, to specify the range 025 to 200 for the *ni* parameter, enter 025&&200 for the *ni* parameter value.

2. The asterisk (*) specifies the entire range of values for that parameter.

For more information about specifying a range of values and about using the asterisk, see the "Gateway Screening Attributes" section in Chapter 2 and the "Specifying a Range of Values" section in this procedure.

3. The *actname* parameter is optional. If the *actname* parameter is specified, the *actname* parameter value is one of the gateway screening stop action set names shown in the *rtrv-gws-actset* output on Sheet 1.

4. To add a non-spare point code, the *pcst* parameter does not have to be specified. If the *pcst* parameter is specified for a screen containing an ITU-I or 14-bit ITU-N non-spare point code, the value must be *none*.

5. To add a spare point code, the *pcst=s* parameter must be specified.

Removing an Allowed Affected Destination Field Screen

This procedure is used to remove an allowed affected destination field (DESTFLD) screen from the database using the `dlt-scr-destfld` command. The parameters used by the `dlt-scr-destfld` command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The example in this procedure removes the allowed DESTFLD screen `fld5` from the database.

NOTE: If you using multiple-part ITU national point codes with gateway screening, see the [14-Bit ITU National Point Code Formats](#) section.

The allowed DESTFLD screen can be referenced by one of the following screens.

- Allowed SIO
- Allowed DPC
- Blocked DPC

Verifying the Gateway Screening Configuration

Enter the following commands to verify that none of these screens reference the allowed CGPA screen being removed from the database.

- `rtrv-scr-sio:nsfi=destfld`
- `rtrv-scr-dpc:nsfi=destfld`
- `rtrv-scr-blkdpc:nsfi=destfld`

Gateway Screening Configuration Procedures

To change the NSFI of any of these screens, perform one of these procedures.

- [Changing an Allowed SIO Screen](#)
- [Changing an Allowed DPC Screen](#)

- [Changing a Blocked DPC Screen](#)

Procedure

1. Display the allowed DESTFLD screens in the database using the **rtrv-scr-destfld** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED DESTFLD
SR   REF  RULES
FLD5 YES   1
IEC  YES   6
WRD2 YES   1
WRD4 YES   9
```

From the **rtrv-scr-destfld** output, display the allowed DESTFLD screen you wish to remove using the **rtrv-scr-destfld** command with the screening reference name. For this example, enter this command.

```
rtrv-scr-destfld:sr=fld5
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED DESTFLD
SR   NI      NC      NCM      NSFI  NSR/ACT
fld5 100      100     100     STOP  cr
```

2. Enter the commands in the [Verifying the Gateway Screening Configuration](#) section to verify that the screen being removed is not referenced by other screens in the database.

If the screen being removed is referenced by other screens, perform the procedures shown in the [Gateway Screening Configuration Procedures](#) section to change the NSFI of those screens to reference other screens or change the NSFI of these screens to STOP.

3. Remove the allowed DESTFLD screen from the database using the **dlt-scr-destfld** command with the screening reference name shown in the **rtrv-scr-destfld** output in step 1 and with the point code parameter values (**ni**, **nc**, **ncm**, or **zone**, **area**, **id**, **npc**, **msa**, **ssa**, or **sp**) of the screen being removed from the database.

The values for these parameters must be entered exactly as shown in the **rtrv-scr-destfld** output.

To remove an entry containing either an ITU-I or a 14-bit ITU-N spare point code, the **pcst=s** parameter must be specified with the **dlt-scr-destfld** command.

To remove an entry containing either an ITU-I or a 14-bit ITU-N non-spare point code, the **pcst** parameter does not have to be specified with the **dlt-scr-destfld** command. If the **pcst** parameter is specified, the value must be **none**.

For this example, enter this command.

```
dlt-scr-destfld:sr=fld5:ni=100:nc=100:ncm=100
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
DLT-SCR-DESTFLD: SCREEN SET AFFECTED - FLD5 0% FULL
DLT-SCR-DESTFLD: MASP A - COMPLTD
```

4. Verify the changes using the **rtrv-scr-destfld** command with the screening reference name used in step 3.

For this example, enter this command.

```
rtrv-scr-destfld:sr=fld5
```

The following is an example of the possible output.

```
E2573 Cmd Rej: SR or NSR does not reference an existing SR
```


This message shows that the specified screening reference name is not in the database and the action of the **dlt-scr-destfld** command in step 3 was successful. If the specified screening reference name contained more than one entry when the **dlt-scr-destfld** command was executed in step 3, the **rtrv-scr-destfld:sr=** command output would show the remaining entries in the screening reference instead of error message E2573.


5. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.  
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.  
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.  
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 7-3. Removing an Allowed Affected Destination Field Screen

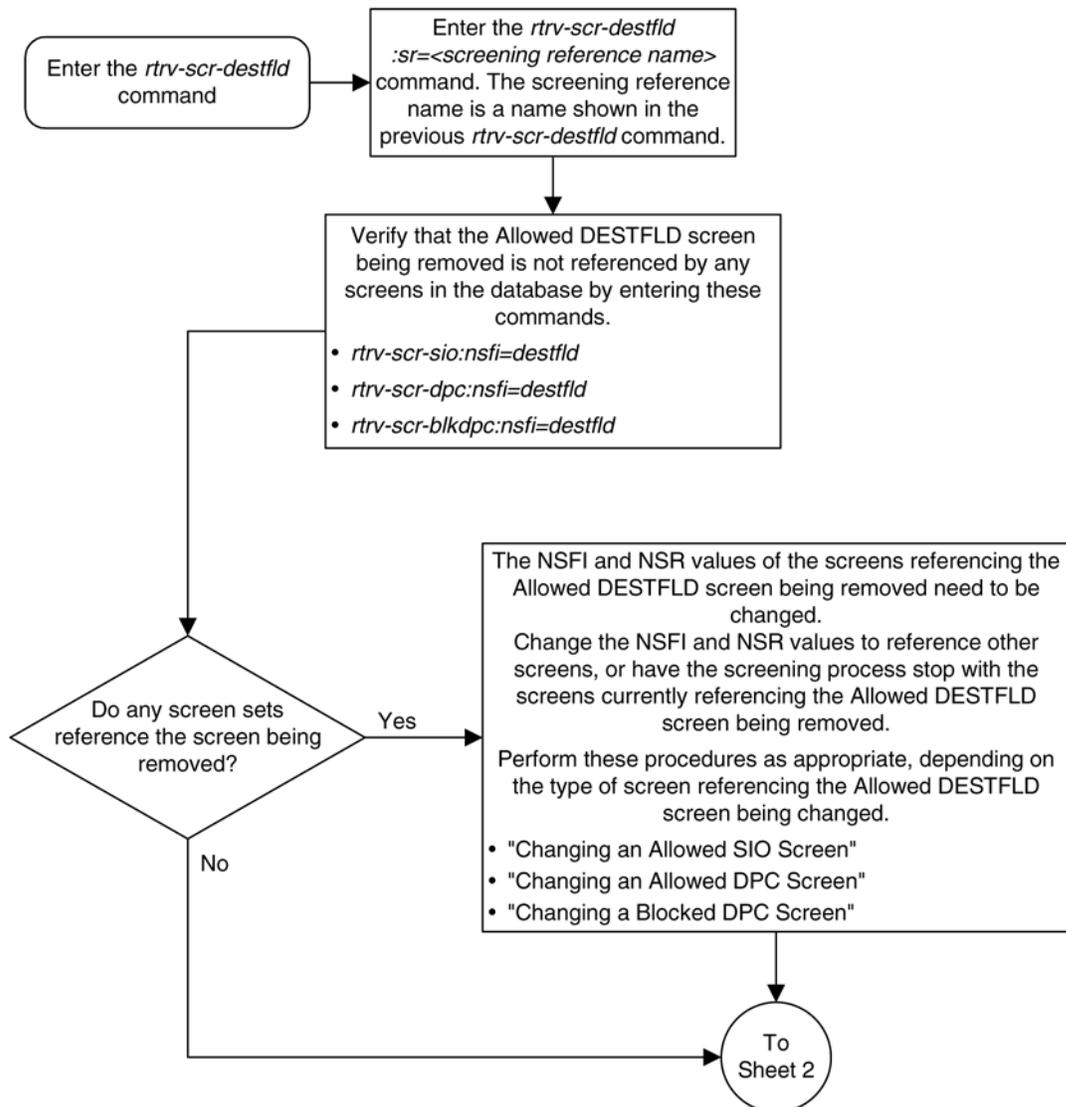

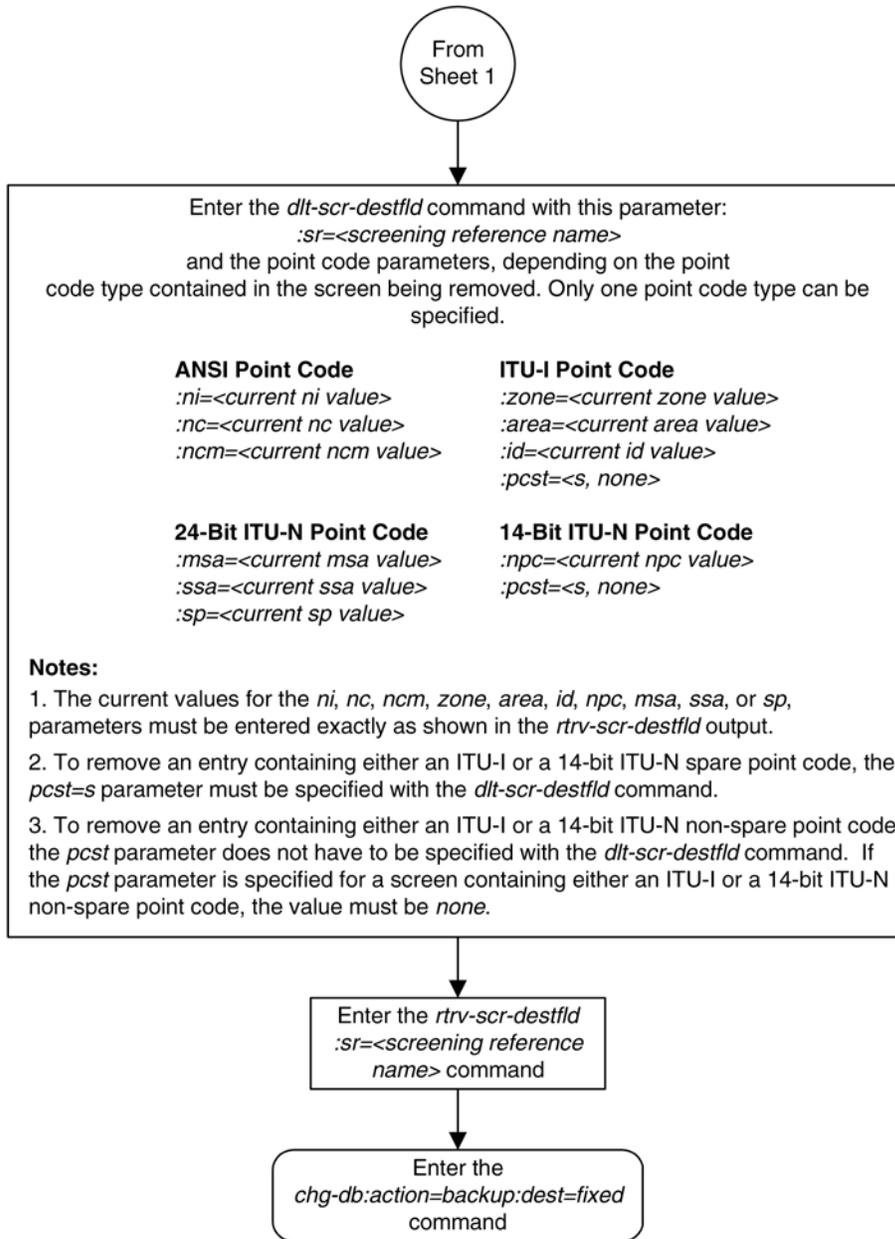

Changing an Allowed Affected Destination Field Screen

This procedure is used to change the attributes of an allowed affected destination field (DESTFLD) screen in the database using the **chg-scr-destfld** command. The parameters used by the **chg-scr-destfld** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The example in this procedure is used to change the point code 100-100-100 for the allowed DESTFLD screen **£1d5** to 030-030-030 and to redirect the MSU for the DTA feature.

NOTE: If you using multiple-part ITU national point codes with gateway screening, see the [14-Bit ITU National Point Code Formats](#) section.

Specifying a Range of Values

A range of values can be specified for the point code parameters **ni**, **nc**, or **ncm**.

If a range of values is specified for any of these parameters, and the value of the other parameters match existing values for the screening reference name, the range of values for the point code parameter cannot include any values for that parameter that are currently provisioned for the screening reference name.

For example, screening reference name **scr1** contains these entries:

SR	NI	NC	NCM	NSFI	NSR/ACT
SCR1	240	001	010	STOP	-----
SCR1	241	010	020	STOP	-----

Another entry for screening reference **scr1** with the **ni** value of 240 and the **nc** value of 001 cannot be specified if the range of values for the **ncm** parameter includes the value 010.

The ANSI point code parameter values can be specified as a single value, a range of values, or with an asterisk (*). The asterisk specifies all possible values for the **ni**, **nc**, and **ncm** parameters. [Table 7-5](#) shows the valid combinations of these parameter values.

Table 7-5. Valid Value Combinations for ANSI Point Code Parameters

NI	NC	NCM
Single Value	Single Value	Single Value
Single Value	Single Value	Range of Values
Single Value	Single Value	Asterisk
Single Value	Range of Values	Asterisk
Single Value	Asterisk	Asterisk
Range of Values	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

A range of values can also be specified for an ITU-I or 24-bit ITU-N point code parameter using a combination of asterisks (*) and single values for the point code parameters. [Table 7-6](#) shows the valid combinations of the ITU-I parameter values. [Table 7-7](#) shows the valid combinations of the 24-bit ITU-N parameter values.

Table 7-6. Valid Value Combinations for ITU-I Point Code Parameters

ZONE	AREA	ID
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Table 7-7. Valid Value Combinations for 24-Bit ITU-N Point Code Parameters

MSA	SSA	SP
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Procedure

1. Display the allowed DESTFLD screens in the database using the **rtrv-scr-destfld** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED DESTFLD
SR   REF  RULES
FLD5 YES   1
IEC  YES   6
WRD2 YES   1
WRD4 YES   9
```

From the **rtrv-scr-destfld** output, display the allowed DESTFLD screen you wish to change using the **rtrv-scr-destfld** command with the screening reference name. For this example, enter this command.

```
rtrv-scr-destfld:sr=fld5
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED DESTFLD
SR   NI      NC      NCM      NSFI  NSR/ACT
fld5 100     100     100     STOP   cr
```

If a gateway screening stop action set is to be assigned to the allowed DESTFLD screen being added to the database, go to step 2. Otherwise, go to step 3.

2. Display the gateway screening stop action sets in the database with the **rtrv-gws-actset** command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
ACT ACT  ACT ACT  ACT ACT  ACT ACT  ACT ACT  ACT ACT
ID  NAME  1   2   3   4   5   6   7   8   9   10
--  ----  - - - - -
1   copy  copy
2   rdct  rdct
3   cr    copy rdct
4   cnf   cnf
5   cpnf  copy cnf
6   cnfrd cnf  rdct
7   cpcfrd copy cnf rdct

GWS action set table is (7 of 16) 44% full
```

If the required gateway screening stop action set is not in the database, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure to configure the required gateway screening stop action set.

3. Display the status of the ITU National and International Spare Point Code Support feature by entering the **rtrv-ctrl-feat** command with the ITU National and International Spare Point Code Support feature part number.

NOTE: If any of these conditions apply to this procedure, skip this step and go to step 4:

- **The point code in the screen is not being changed.**
- **The screen being changed contains either an ANSI or 24-bit ITU-N point code.**
- **The ITU-I or 14-bit ITU-N non-spare point code in the screen is not being changed to an ITU-I or 14-bit ITU-N spare point code.**
- **The point code in the screen is an ITU-I or 14-bit ITU-N spare point code or the screening reference contains other screens with ITU-I or 14-bit ITU-N spare point codes.**

Enter this command.

```
rtrv-ctrl-feat:partnum=893013601
```

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
The following features have been permanently enabled:
```

Feature Name	Partnum	Status	Quantity
Spare Point Code Support	893013601	on	----

The following features have been temporarily enabled:

Feature Name	Partnum	Status	Quantity	Trial Period Left
Zero entries found.				

The following features have expired temporary keys:

Feature Name	Partnum
Zero entries found.	

If the ITU National and International Spare Point Code Support feature is enabled, go to step 4.

If the ITU National and International Spare Point Code Support feature is not enabled, perform the “Activating the ITU National and International Spare Point Code Support Feature” procedure in the *Database Administration Manual - SS7* to enable the ITU National and International Spare Point Code Support feature as required. After the feature has been enabled, go to step 4.

4. Change the attributes of an allowed DESTFLD screen using the **chg-scr-destfld** command.

If a gateway screening stop action is to be assigned to the allowed DESTFLD screen being changed, enter the **chg-scr-destfld** command with the **actname** parameter with the name of a gateway screening stop action set shown in the output of the **rtrv-gws-actset** command executed in step 2.

The current values for the **ni**, **nc**, **ncm**, **zone**, **area**, **id**, **npc**, **msa**, **ssa**, and **sp** parameters must be entered exactly as shown in the **rtrv-scr-destfld** output in step 1.

The following list contains the values for the **nni**, **nnc**, **nncm**, **nzone**, **narea**, **nid**, **nnpc**, **nmsa**, **nssa**, and **nsp** parameters:

- **nni** - 0-255 or an asterisk (*)
- **nnc** - 0-255 or an asterisk (*)

- nncm - 0-255 or an asterisk (*)
- nzone - 0-7 or an asterisk (*)
- narea - 0-255 or an asterisk (*)
- nid - 0-7 or an asterisk (*)
- nnpc - 1 - 16383 or an asterisk (*)
- nmsa - 0-255 or an asterisk (*)
- nssa - 0-255 or an asterisk (*)
- nsp - 0-255 or an asterisk (*)

chg-scr-

destfld:sr=fld5:ni=100:nc=100:nncm=100:nni=030:nnc=030 :nncm=030:actname=rdct

The following messages appear.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
CHG-SCR-DESTFLD: SCREEN SET AFFECTED - FLD5 1% FULL
CHG-SCR-DESTFLD: MASP A - COMPLTD
```

5. Verify the changes using the **rtrv-scr-destfld** command with screening reference name used in step 4.

For this example, enter this command.

rtrv-scr-destfld:sr=fld5

The following is an example of the possible output.


```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED DESTFLD
SR  NI      NC      NCM      NSF1  NSR/ACT
fld5 030      030      030      STOP  rdct
```


6. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 7-4. Changing an Allowed Affected Destination Field Screen

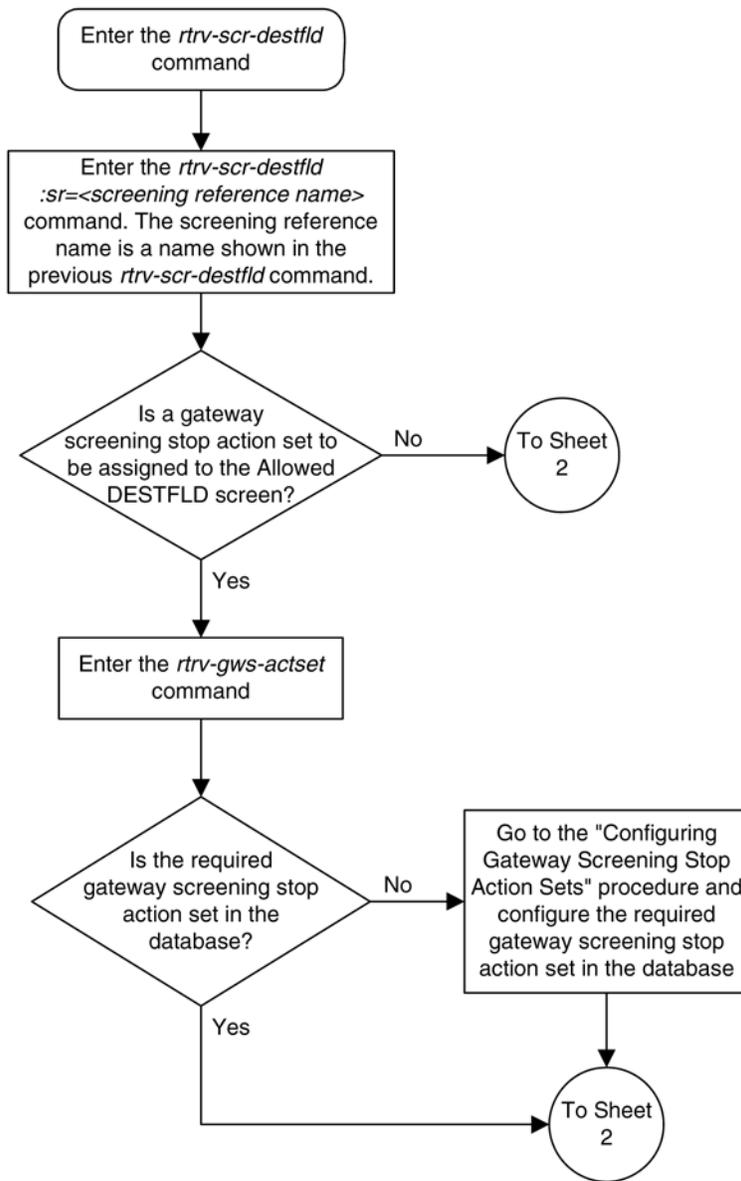

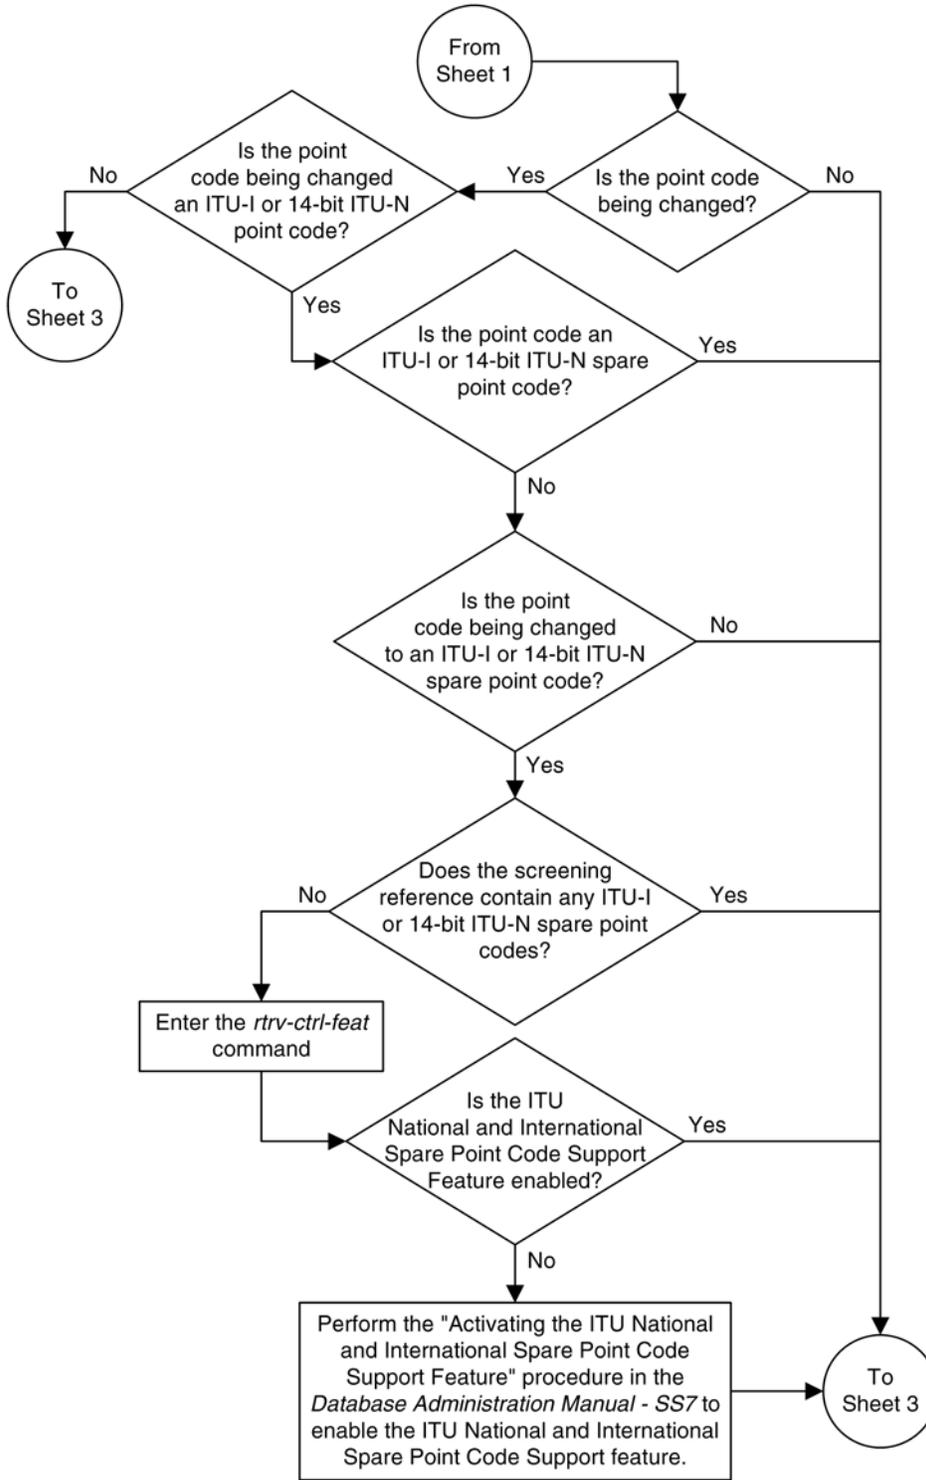



Enter the *chg-scr-destfld* command with these mandatory parameters:
:sr=<screening reference name>
 and the point code parameters, depending on the point code type contained in the screen being changed. Only one point code type can be specified.

ANSI Point Code	ITU-I Point Code	14-Bit ITU-N Point Code	24-Bit ITU-N Point Code
<i>:ni=<current ni value></i>	<i>:zone=<current zone value></i>	<i>:npc=<current npc value></i>	<i>:msa=<current msa value></i>
<i>:nc=<current nc value></i>	<i>:area=<current area value></i>	<i>:pcst=<s, none></i>	<i>:ssa=<current ssa value></i>
<i>:ncm=<current ncm value></i>	<i>:id=<current id value></i>		<i>:sp=<current sp value></i>
	<i>:pcst=<s, none></i>		

At least one of these optional parameters must be specified with the *chg-scr-destfld* command.
:actname=<GWS stop action set name>

ANSI Point Code	ITU-I Point Code	14-Bit ITU-N Point Code	24-Bit ITU-N Point Code
<i>:nni=<0-255, *></i>	<i>:nzone=<0-7, *></i>	<i>:nnpc=<1-16383, *></i>	<i>:nmsa=<0-255, *></i>
<i>:nnc=<0-255, *></i>	<i>:narea=<0-255, *></i>	<i>:npcst=<s, none></i>	<i>:nssa=<0-255, *></i>
<i>:nncm=<0-255, *></i>	<i>:nid=<0-7, *></i>		<i>:nsp=<0-255, *></i>
	<i>:npcst=<s, none></i>		

If the new point code code parameters are specified, they must be of the same type as the current point code values specified in the *chg-scr-destfld* command.
 (See the Notes on Sheet 5)

Enter the *rtvr-scr-destfld*
:sr=<screening reference name> command

Enter the
chg-db:action=backup:dest=fixed
 command

Notes:

1. A range of values can be specified for the *nni*, *nnc*, or *nncm* parameters by inserting double ampersands (&&) between the parameter values defining the range. For example, to specify the range 025 to 200 for the *nni* parameter, enter 025&&200 for the *nni* parameter value.

2. The asterisk (*) specifies the entire range of values for that parameter.

For more information about specifying a range of values and about using the asterisk, see the "Gateway Screening Attributes" section in Chapter 2 and the "Specifying a Range of Values" section in this procedure.

3. The *actname* parameter is optional. If the *actname* parameter is specified, the *actname* parameter value is one of the gateway screening stop action set names shown in the *rtrv-gws-actset* output on Sheet 1.

4. The current values for the *ni*, *nc*, *nncm*, *zone*, *area*, *id*, *npc*, *msa*, *ssa*, and *sp* parameters must be entered exactly as shown in the *rtrv-scr-destfld* output.

5. To change an ITU-I or 14-bit ITU-N spare point code to a non-spare point code, both the *pcst=s* and *npcst=none* parameters must be specified with the *chg-scr-destfld* command.

6. To change an ITU-I or 14-bit ITU-N non-spare point code to a spare point code, the *npcst=s* parameter must be specified with the *chg-scr-destfld* command. The *pcst* parameter does not have to be specified.

7. If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N spare point code, the *pcst=s* parameter must be specified with the *chg-scr-destfld* command.

8. If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N non-spare point code, the *pcst* parameter does not have to be specified with the *chg-scr-destfld* command. If the *pcst* parameter is specified for a screen containing either an ITU-I or 14-bit ITU-N non-spare point code, the *pcst* parameter value must be *none*.

Blocked Destination Point Code (BLKDPC) Screen Configuration

Introduction	8-1
Adding a Blocked DPC Screen	8-7
Removing a Blocked DPC Screen	8-18
Changing a Blocked DPC Screen	8-23

Introduction

The blocked DPC screen identifies DPC's that are not allowed to receive SS7 messages from another network. The gray shaded areas in [Figure 8-1](#) shows the fields of the SS7 message that are checked by the blocked DPC screening function. If a match is found, the **nsfi** is equal to **fail**, the message is discarded and no further screening takes place.

If no match is found, the **nsfi** is examined to determine the next step in the screening process. If the **nsfi** is equal to **stop**, the message is processed and no further screening takes place.

If the **nsfi** is equal to **stop**, and the **copy** gateway screening stop action is specified, the message is processed and a copy of the message is sent by the STPLAN feature to an external application.

If the **nsfi** is equal to **stop**, and the **rdct** (redirect) gateway screening stop action is specified, the message is diverted from the original destination and sent to another destination with the Database Transport Access feature, specified by global title translation, for further processing.

If the Calling Name Conversion Facility (CNCF) feature is on, the **nsfi** is equal to **stop**, and the **cncf** gateway screening stop action is specified, the PIP parameter in the incoming ISUP IAM message is converted to the GN parameter. The GN parameter in the incoming ISUP IAM message is converted to the PIP parameter. The message is then sent to the node specified by the DPC in the routing label in the message. For more information on the Calling Name Conversion Facility feature, see [Chapter 14 Calling Name Conversion Facility \(CNCF\) Configuration](#).


If the Triggerless LNP (TLNP) feature is on, the **nsfi** is equal to **stop**, and the **tlnp** gateway screening stop action is specified, ISUP IAMs that pass gateway screening are processed either by the ISUP NP with EPAP feature (if the ISUP NP with EPAP feature is enabled and turned on) or by the Triggerless LNP feature (if the Triggerless LNP feature is turned on). The ISUP NP with EPAP feature is discussed in more detail in the *Feature Manual - G-Port*. The Triggerless LNP feature is discussed in more detail in the *LNP Feature Activation Guide*.


If the Triggerless ISUP based Number Portability (TINP) feature is enabled, the **nsfi** is equal to **stop**, and the **tinp** gateway screening stop action is specified, ISUP IAMs that pass gateway screening are intercepted by the Triggerless ISUP based Number Portability (TINP) feature and converted to include the routing number (RN) if the call is to a ported number. The TINP feature is discussed in more detail in the *Feature Manual - G-Port*.


If the **nsfi** is equal to anything else, the next screening reference (**nsr**) is identified and the screening process continues to the next screen identified by the **nsfi** and **nsr** parameters.


[Flowchart 8-28](#) shows the screening action of the blocked DPC screen.

Flowchart 8-1. Blocked DPC Screening Action

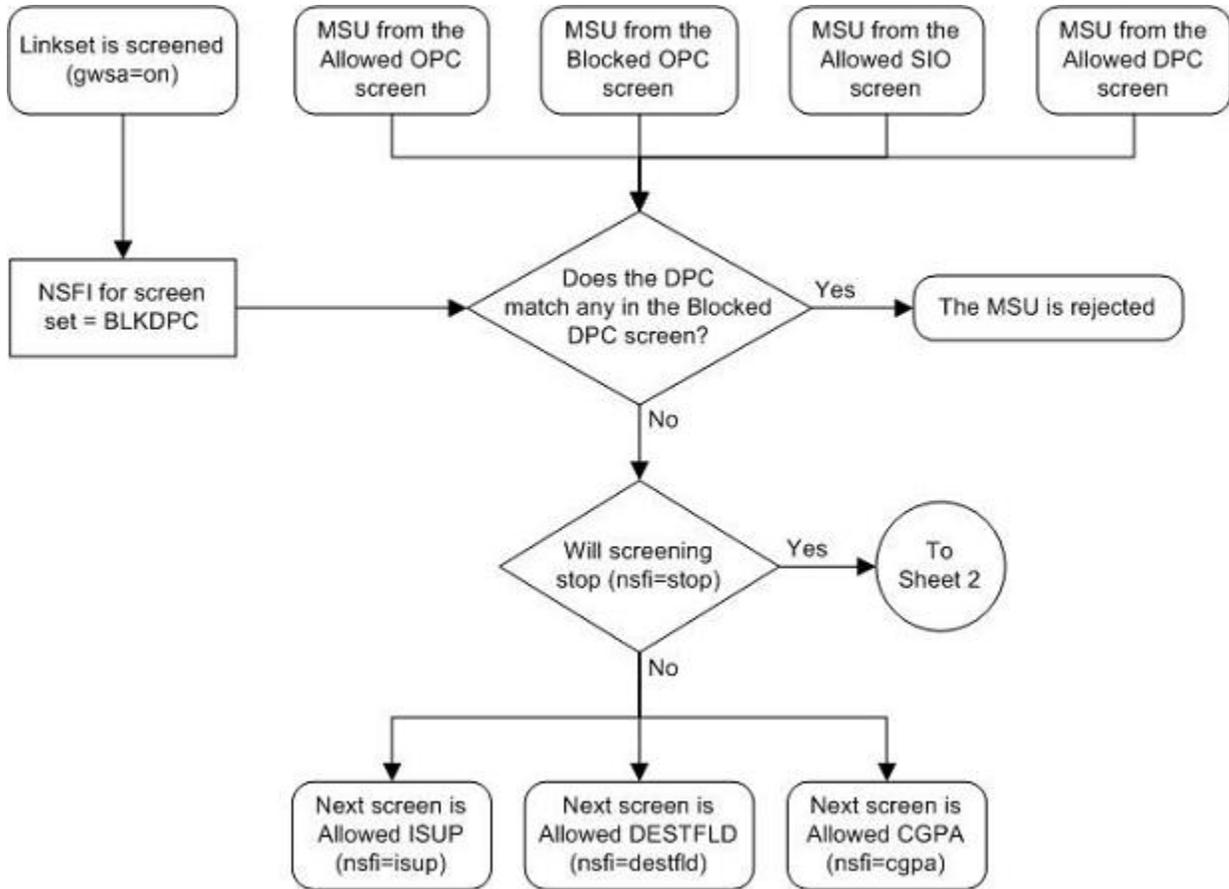

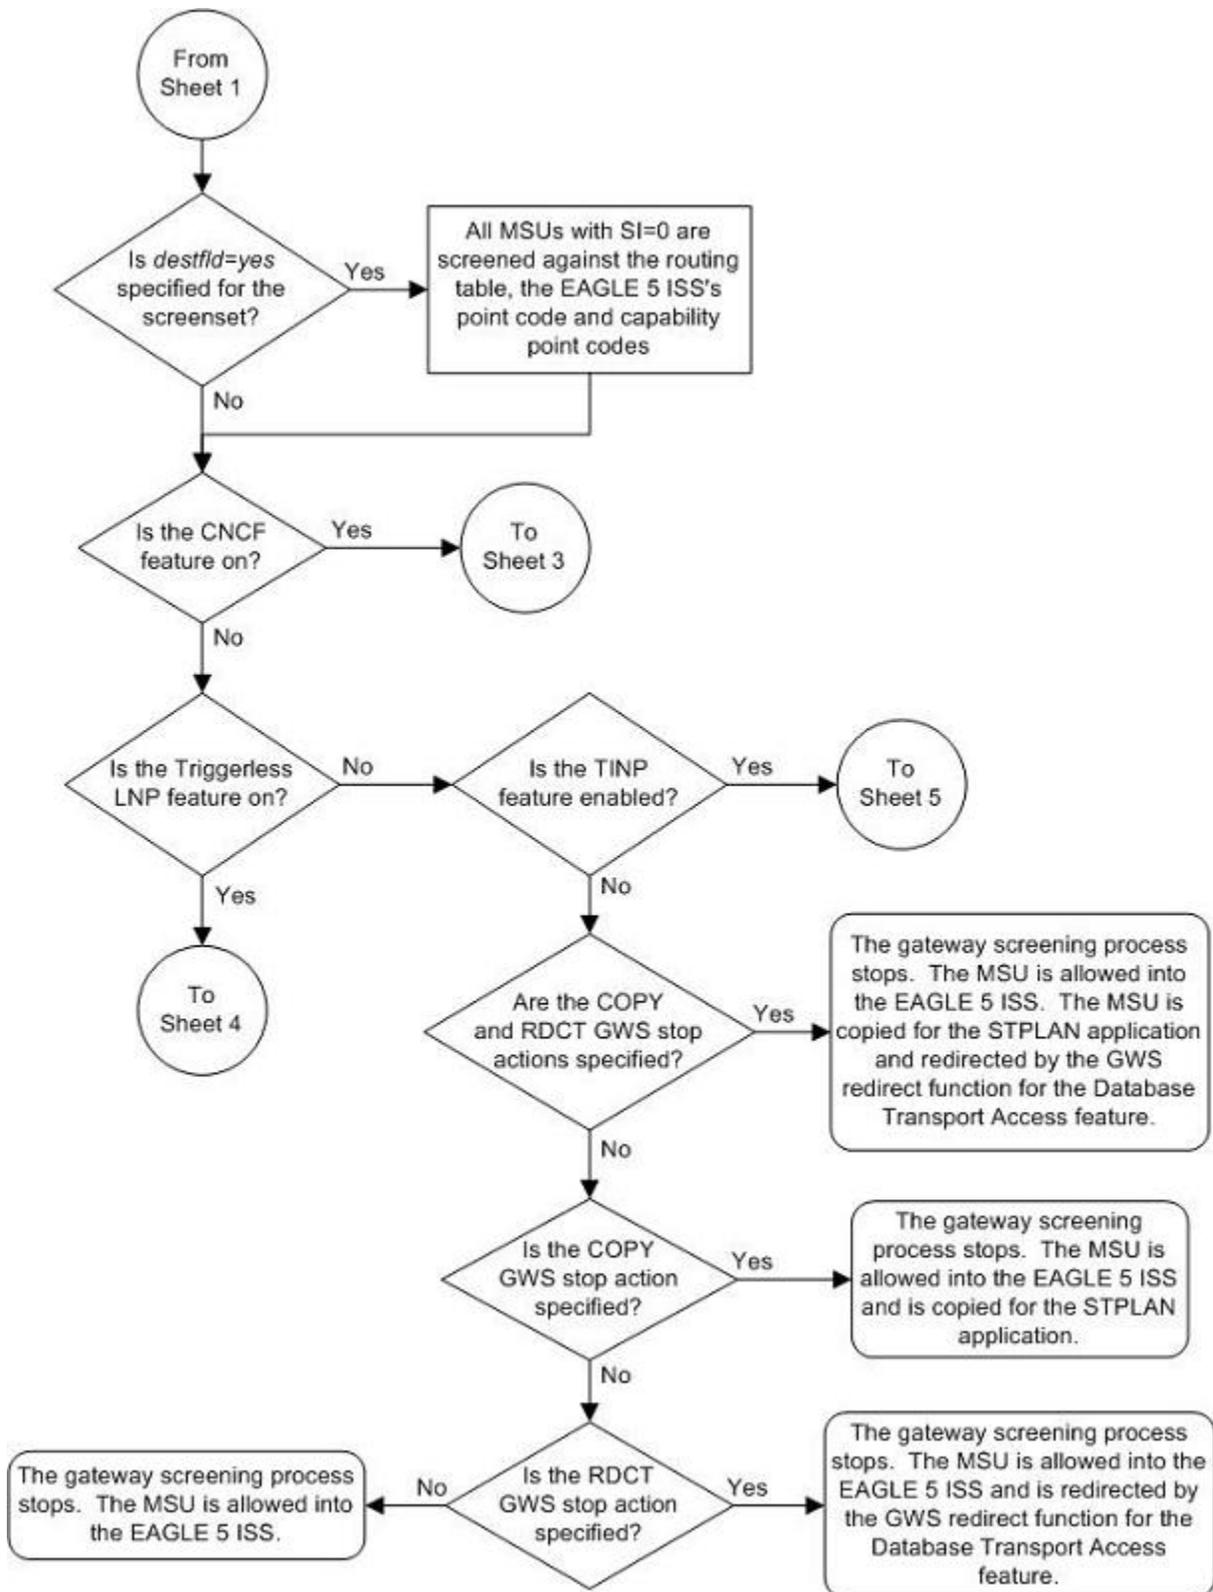

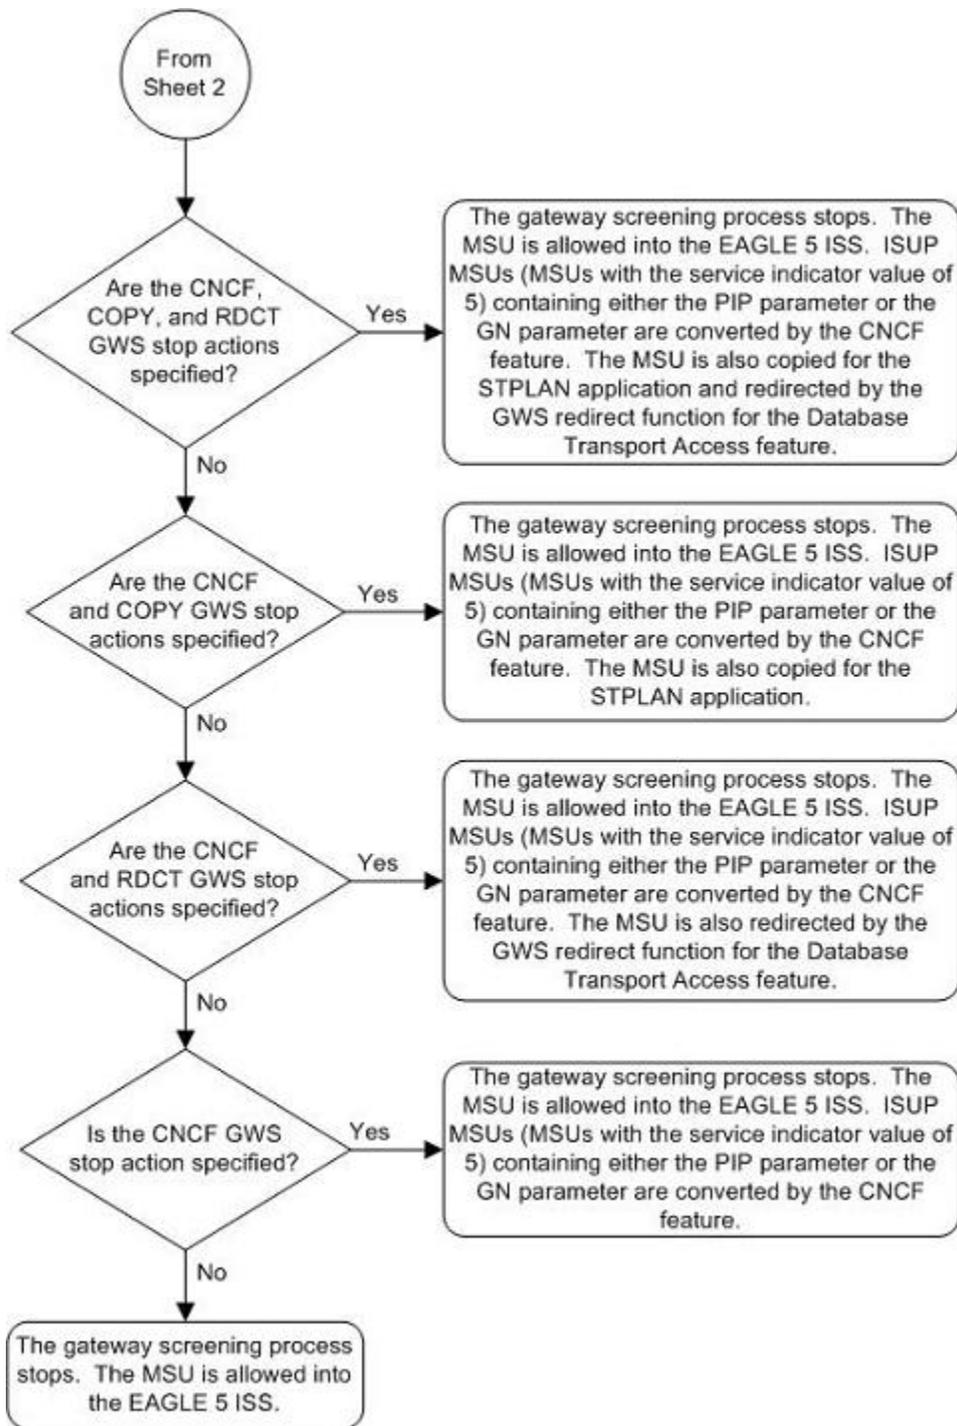

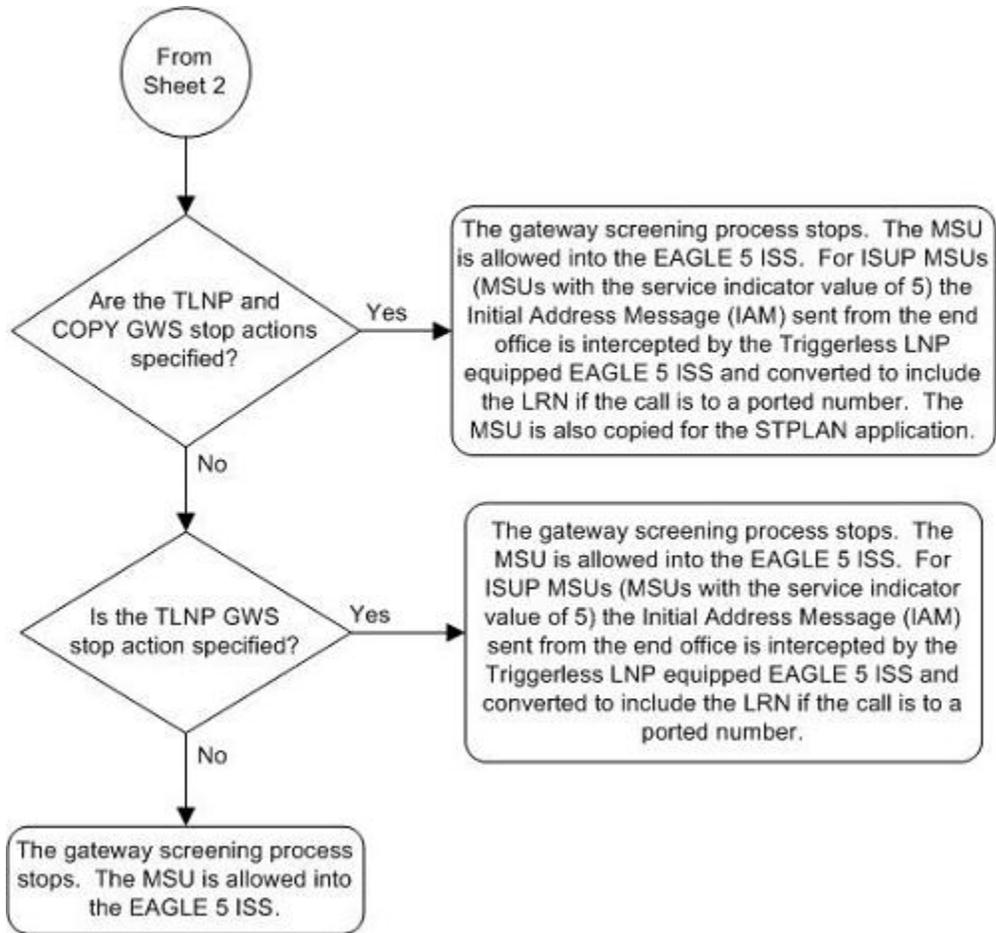


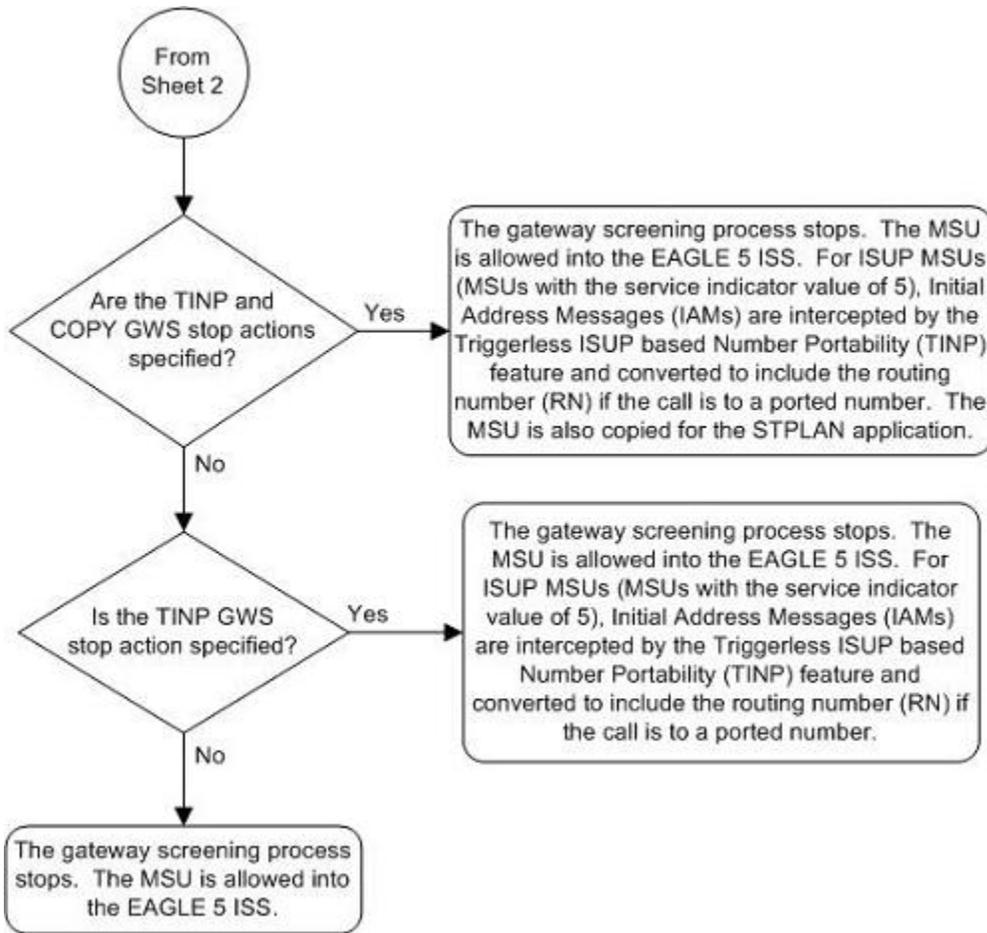


Figure 8-1. Blocked DPC Screening Functions

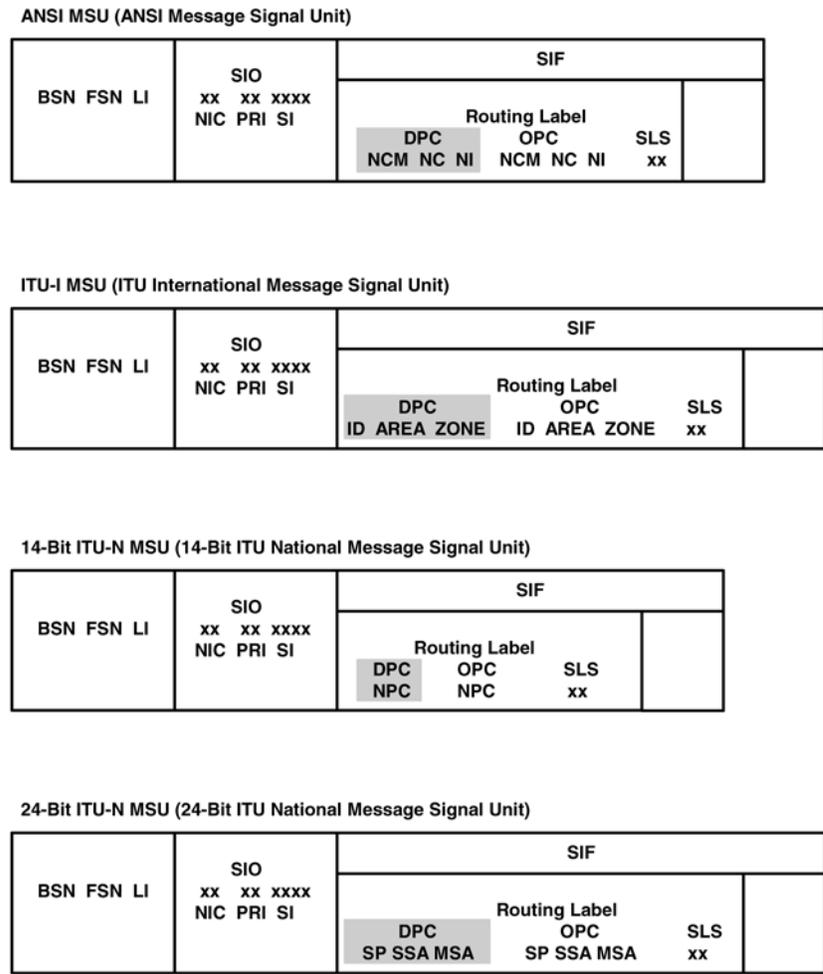

Adding a Blocked DPC Screen

This procedure is used to add a blocked destination point code (DPC) screen to the database using the **ent-scr-blkdpc** command. The parameters used by the **ent-scr-blkdpc** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The examples in this procedure are used to add the blocked DPC screen data shown in [Table 8-1](#) and based on the example configurations shown in [Figure 2-3](#) and [Figure 2-5](#).

Table 8-1. Example Gateway Screening Blocked DPC Configuration Table

Screening Reference	NI	NC	NCM	NSFI	NSR
gws9	C	C	C	cgpa	gw13
gws9	005	005	005	fail	----
gw12	C	C	C	cgpa	gw14

Screening Reference	NI	NC	NCM	NSFI	NSR
gw12	004	004	004	fail	----

NOTE: If you using multiple-part ITU national point codes with gateway screening, see the [14-Bit ITU National Point Code Formats](#) section.

The blocked DPC screen can reference one of the following screens.

- Allowed Affected Destination Field
- Allowed CGPA
- Allowed ISUP

Verifying Gateway Screening Configuration

Enter the following commands to verify that these screens are in the database.

- `rtrv-scr-destfld:all=yes`
- `rtrv-scr-cgpa:all=yes`
- `rtrv-scr-isup:all=yes`

Gateway Screening Configuration Procedures

If the desired screen is not in the database, perform one of the following procedures to add the desired screen to the database or change an existing screen in the database.

- [Adding an Allowed Affected Destination Field Screen](#)
- [Adding an Allowed Calling Party Address Screen](#)
- [Adding an Allowed ISUP Message Type Screen](#)
- [Changing an Allowed Affected Destination Field Screen](#)
- [Changing an Allowed Calling Party Address Screen](#)
- [Changing an Allowed ISUP Message Type Screen](#)

For the first entry for a specific screening reference, the value for the point code must be **c**, and the NSFI must be either **stop** or **cgpa**. If the NSFI is **stop**, the screening of the message will stop at the specified blocked DPC screen. If the NSFI is **cgpa**, then any message containing a point code that is not listed in the blocked DPC screen with a NSFI equal to **fail**, will continue to be screened with the allowed CGPA screen. All subsequent entries for that screening reference must contain a numeric point code value, the NSFI must be equal to **fail**, and the **nsr** parameter cannot be specified. Any message that contains a DPC in the blocked DPC screen with the NSFI equal to **fail** will be rejected from the network and the screening process is stopped.

The **pcst** parameter, specifying whether or not the ITU-I or 14-bit ITU-N point code is a spare point code, cannot be used with the **zone=c** or **npc=c** parameters.

Specifying a Range of Values

A range of values can be specified for the point code parameters **ni**, **nc**, or **ncm**.

If a range of values is specified for any of these parameters, and the value of the other parameters match existing values for the screening reference name, the range of values for the point code parameter cannot include any values for that parameter that are currently provisioned for the screening reference name.

For example, screening reference name **scr1** contains these entries:

SR	NI	NC	NCM	NSFI	NSR/ACT
SCR1	C	C	C	CGPA	cg01
SCR1	240	001	010	FAIL	-----
SCR1	241	010	020	FAIL	-----

Another entry for screening reference **scr1** with the **ni** value of 240 and the **nc** value of 001 cannot be specified if the range of values for the **ncm** parameter includes the value 010.

The ANSI point code parameter values can be specified as a single value, a range of values, or with an asterisk (*). The asterisk specifies all possible values for the **ni**, **nc**, and **ncm** parameters. [Table 8-2](#) shows the valid combinations of these parameter values.

Table 8-2. Valid Value Combinations for ANSI Point Code Parameters

NI	NC	NCM
Single Value	Single Value	Single Value
Single Value	Single Value	Range of Values
Single Value	Single Value	Asterisk
Single Value	Range of Values	Asterisk
Single Value	Asterisk	Asterisk
Range of Values	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

A range of values can also be specified for an ITU-I or 24-bit ITU-N point code parameter using a combination of asterisks (*) and single values for the point code parameters. [Table 8-3](#) shows the valid combinations of the ITU-I parameter values. [Table 8-4](#) shows the valid combinations of the 24-bit ITU-N parameter values.

Table 8-3. Valid Value Combinations for ITU-I Point Code Parameters

ZONE	AREA	ID
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Table 8-4. Valid Value Combinations for 24-Bit ITU-N Point Code Parameters

MSA	SSA	SP
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Procedure

1. Verify that the gateway screening feature is on, by entering the **rtrv-feat** command.

If the gateway screening feature is on, the **GWS** field is set to **on**.

NOTE: The **rtrv-feat** command output contains other fields that are not used by this procedure. If you wish to see all the fields displayed by the **rtrv-feat** command, see the **rtrv-feat** command description in the *Commands Manual*.

If the gateway screening feature is on, shown by the entry **GWS = on** in the **rtrv-feat** command output, skip step 2, and go to step 3.

- Turn the gateway screening feature on by entering this command.

```
chg-feat:gws=on
```

NOTE: Once the gateway screening feature is turned on with the **chg-feat command, it cannot be turned off.**

The gateway screening feature must be purchased before you turn this feature on with the **chg-feat command. If you are not sure if you have purchased the gateway screening feature, contact your Tekelec Sales Representative or Account Representative.**

When the **chg-feat** has successfully completed, this message should appear.

```
rlghncxa03w 06-10-28 11:43:04 GMT EAGLE5 36.0.0
CHG-FEAT: MASP A - COMPLTD
```

- Display all blocked DPC screens in the database using the **rtrv-scr-blkdpc** command. The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = BLOCKED DPC
SR   REF  RULES
IEC  YES   6
WRD2 YES   1
WRD3 NO    4
WRD4 YES   9
```

If the screening reference names that you wish to add with this procedure are not shown in the **rtrv-scr-blkdpc** command output, go to step 4. For this example, the screening reference names are not shown. If these screening reference names are shown in the **rtrv-scr-blkdpc** command output, make sure the screening data you wish to enter is not already in the database by entering the **rtrv-scr-blkdpc** command with the screening reference name. For example, enter the **rtrv-scr-blkdpc:sr=iec** command. The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
SCREEN = BLOCKED DPC
SR   NI      NC      NCM      NSF1     NSR/ACT
IEC  240     001     010     FAIL     -----
IEC  241     010     *       FAIL     -----

SR      NPC      NSF1     NSR/ACT
IEC     00235     FAIL     -----

SR      ZONE   AREA   ID     NSF1     NSR/ACT
IEC     1      003   4      FAIL     -----
IEC     1      003   5      FAIL     -----
IEC     C      C     C      CGPA     cg01
```

If a gateway screening stop action set is to be assigned to the blocked DPC screen being added to the database, go to step 4.

Step 4 verifies the gateway screening stop action set names in the database. The gateway screening stop action set names are assigned only if the NSF1 of the screen being added in this procedure is STOP. If the NSF1 of the new screen will be STOP, but a gateway screening stop action set name will not be assigned to the new screen, skip steps 4 and 5 and go to step 6. If the NSF1 of the new screen is not STOP, skip step 4 and go to step 5.

- Display the gateway screening stop action sets in the database with the **rtrv-gws-actset** command. This is an example of the possible output.

```

rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
ACT ACT
ID NAME 1 2 3 4 5 6 7 8 9 10
---
1 copy copy
2 rdct rdct
3 cr copy rdct
4 cnf cnf
5 cpcnf copy cnf
6 cnfprd cnf rdct
7 cpcprd copy cnf rdct

```

GWS action set table is (7 of 16) 44% full

If the required gateway screening stop action set is not in the database, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure to configure the required gateway screening stop action set.

NOTE: If the NSFI of the screen being added in this procedure is STOP or FAIL, skip step 5 and go to step 6.

5. Enter the commands in the [Verifying the Gateway Screening Configuration](#) section to verify that the screen that will be specified by the NSFI/NSR parameter combination in step 7 is in the database.

If the desired screen is not in the database, perform one of the procedures shown in the [Gateway Screening Configuration Procedures](#) section to add the desired screen to the database or change an existing screen in the database.

NOTE: If the point code being added in this procedure is not an ITU-I or 14-bit ITU-N spare point code, skip this step and to step 7.

NOTE: If the point code being added in this procedure is an ITU-I or 14-bit ITU-N spare point code and the screening reference contains ITU-I or 14-bit ITU-N spare point codes, skip this step and go to step 7.

6. Display the status of the ITU National and International Spare Point Code Support feature by entering the **rtrv-ctrl-feat** command with the ITU National and International Spare Point Code Support feature part number.

Enter this command.

```
rtrv-ctrl-feat:partnum=893013601
```

This is an example of the possible output.

```

rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
The following features have been permanently enabled:

```

```

Feature Name          Partnum  Status Quantity
Spare Point Code Support 893013601 on    ----

```

The following features have been temporarily enabled:

```

Feature Name          Partnum  Status Quantity  Trial Period Left
Zero entries found.

```

The following features have expired temporary keys:

```

Feature Name          Partnum
Zero entries found.

```

If the ITU National and International Spare Point Code Support feature is enabled, go to step 7.

If the ITU National and International Spare Point Code Support feature is not enabled, perform the “Activating the ITU National and International Spare Point Code Support Feature” procedure in the

Database Administration Manual - SS7 to enable the ITU National and International Spare Point Code Support feature as required. After the feature has been enabled, go to step 7.

7. Add a new blocked DPC screen to the database using the **ent-scr-blkdpc** command.

If a gateway screening stop action is to be assigned to the blocked DPC screen being added, enter the **ent-scr-blkdpc** command with the **nsfi=stop** parameter and the **actname** parameter with the name of a gateway screening stop action set shown in the output of the **rtrv-gws-actset** command executed in step 4.

The following list contains the values for **ni**, **nc**, **ncm**, **zone**, **area**, **id**, **npc**, **msa**, **ssa**, and **sp** parameters:

- ni - 0-255, c, or an asterisk (*)
- nc - 0-255, c, or an asterisk (*)
- ncm - 0-255, c, or an asterisk (*)
- zone - 0-7, c, or an asterisk (*)
- area - 0-255, c, or an asterisk (*)
- id - 0-7, c, or an asterisk (*)
- npc - 1 - 16383, c, or an asterisk (*)
- msa - 0-255, c, or an asterisk (*)
- ssa - 0-255, c, or an asterisk (*)
- sp - 0-255, c, or an asterisk (*)

A range of values can be specified for the **ni**, **nc**, and **ncm** parameters. See the [“Specifying a Range of Values”](#) section for more information on how the asterisk and a range of values are used for the **ni**, **nc**, and **ncm** parameters.

To add a spare point code to the blocked DPC screen, the **pcst=s** parameter must be specified. To add a non-spare point code to the blocked DPC screen, the **pcst** parameter does not have to be specified. If the **pcst** parameter is specified for a screen containing an ITU-I or 14-bit ITU-N non-spare point code, the value must be **none**. The **pcst** parameter cannot be used with the **zone=c** or **npc=c** parameters.

For this example, enter these commands.

```
ent-scr-blkdpc:sr=gws9:ni=c:nc=c:ncm=c:nsfi=cgpa:nsr=gw13
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
ENT-SCR-BLKDPC: SCREEN SET AFFECTED - GWS9 1% FULL
ENT-SCR-BLKDPC: MASP A - COMPLTD
```

```
ent-scr-blkdpc:sr=gws9:ni=005:nc=005:ncm=005:nsfi=fail
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:29:30 GMT EAGLE5 36.0.0
ENT-SCR-BLKDPC: SCREEN SET AFFECTED - GWS9 1% FULL
ENT-SCR-BLKDPC: MASP A - COMPLTD
```

```
ent-scr-blkdpc:sr=gw12:ni=c:nc=c:ncm=c:nsfi=cgpa:nsr=gw14
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:30:30 GMT EAGLE5 36.0.0
ENT-SCR-BLKDPC: SCREEN SET AFFECTED - GW12 1% FULL
ENT-SCR-BLKDPC: MASP A - COMPLTD
```

ent-scr-blkdpc:sr=gw12:ni=004:nc=004:ncm=004:nsfi=fail

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:31:30 GMT EAGLE5 36.0.0
ENT-SCR-BLKDPC: SCREEN SET AFFECTED - GW12 1% FULL
ENT-SCR-BLKDPC: MASP A - COMPLTD
```

- Verify the changes using the **rtrv-scr-blkdpc** command with the screening reference name used in step 7. For this example, enter these commands.

rtrv-scr-blkdpc:sr=gws9

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:32:30 GMT EAGLE5 36.0.0
SCREEN = BLOCKED DPC
SR  NI      NC      NCM      NSFI     NSR/ACT
GWS9 C        C        C        CGPA     GW13
GWS9 005     005     005     FAIL     -----
```

rtrv-scr-blkdpc:sr=gw12

The following is an example of the possible output.


```
rlghncxa03w 06-10-25 15:33:30 GMT EAGLE5 36.0.0
SCREEN = BLOCKED DPC
SR  NI      NC      NCM      NSFI     NSR/ACT
GW12 C        C        C        CGPA     GW14
GW12 004     004     004     FAIL     -----
```


- Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 8-2. Adding a Blocked DPC Screen

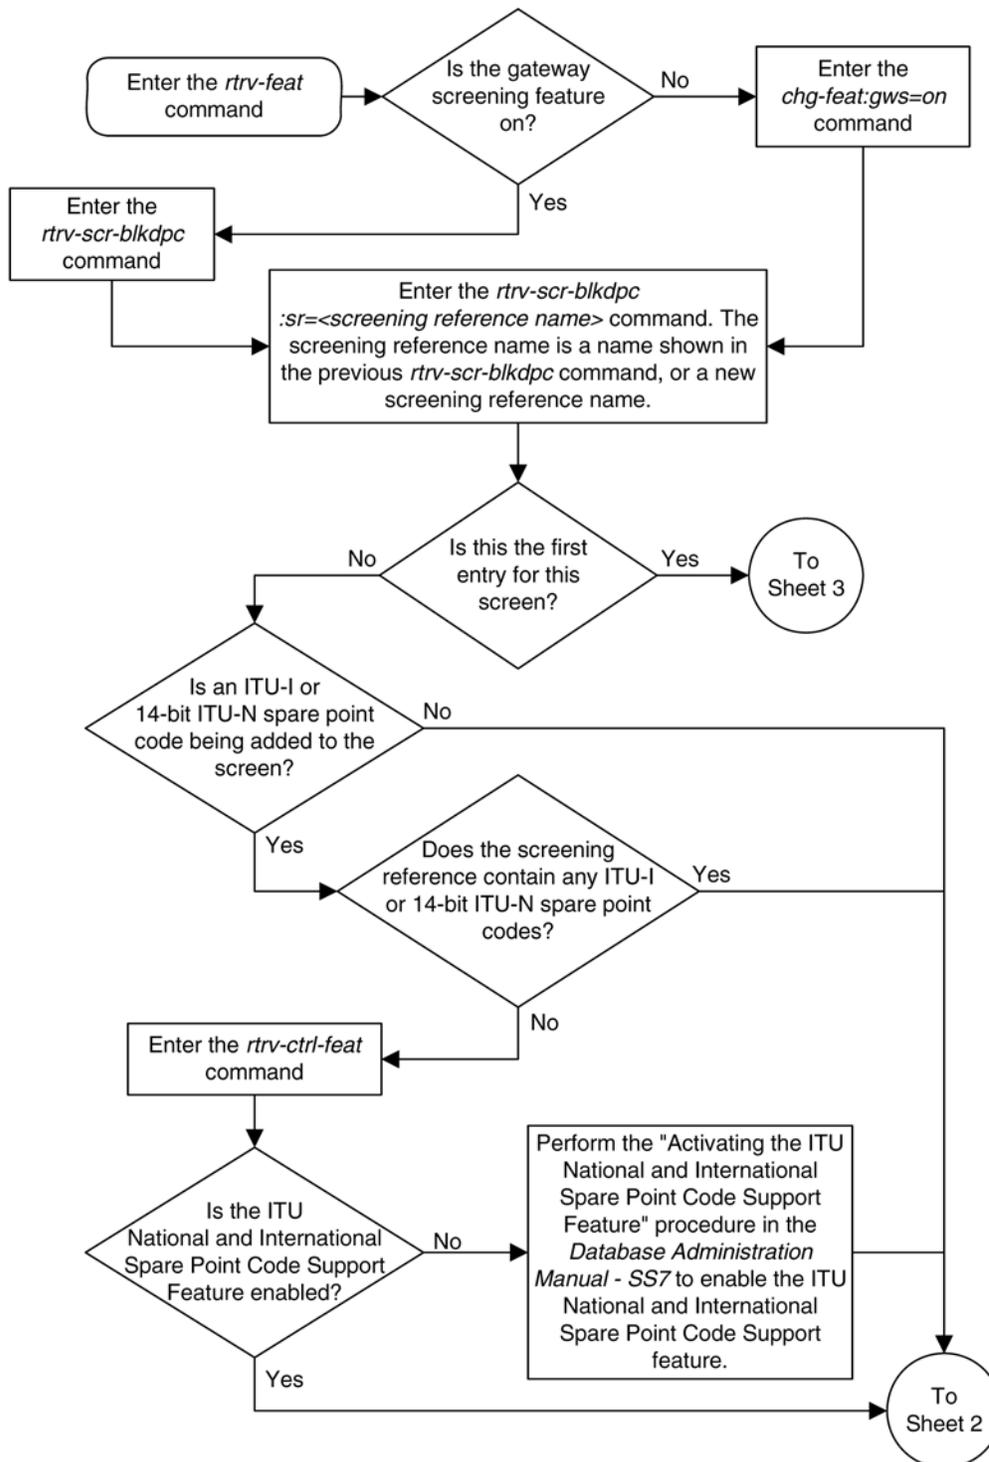

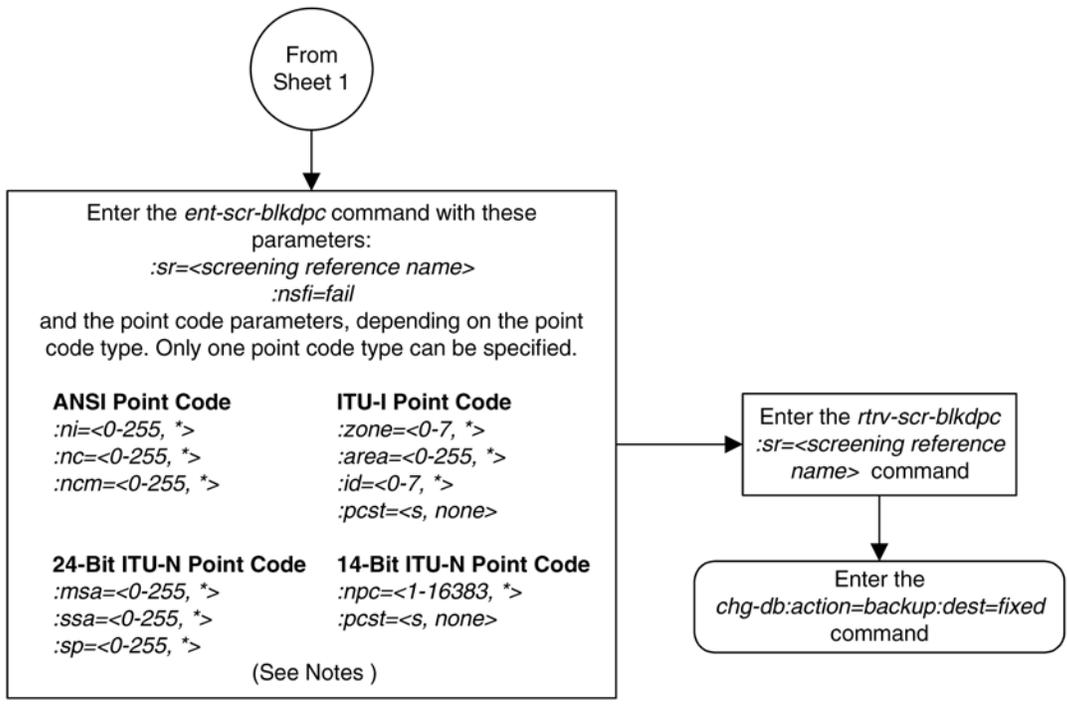



Notes:


1. A range of values can be specified for the *ni*, *nc*, or *ncm* parameters by inserting double ampersands (&&) between the parameter values defining the range. For example, to specify the range 025 to 200 for the *ni* parameter, enter 025&&200 for the *ni* parameter value.
2. The asterisk (*) specifies the entire range of values for that parameter.

For more information about specifying a range of values and about using the asterisk, see the "Gateway Screening Attributes" section in Chapter 2 and the "Specifying a Range of Values" section in this procedure.

3. To add a non-spare point code, the *pcst* parameter does not have to be specified. If the *pcst* parameter is specified for a screen containing an ITU-I or 14-bit ITU-N non-spare point code, the value must be *none*.
4. To add a spare point code, the *pcst=s* parameter must be specified.

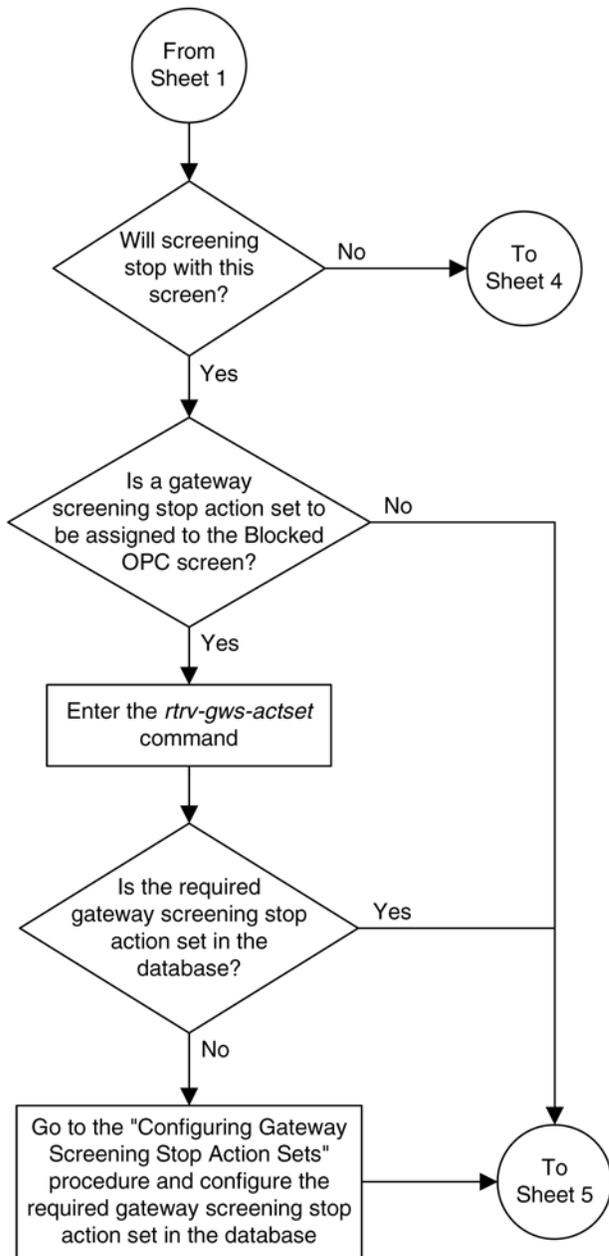

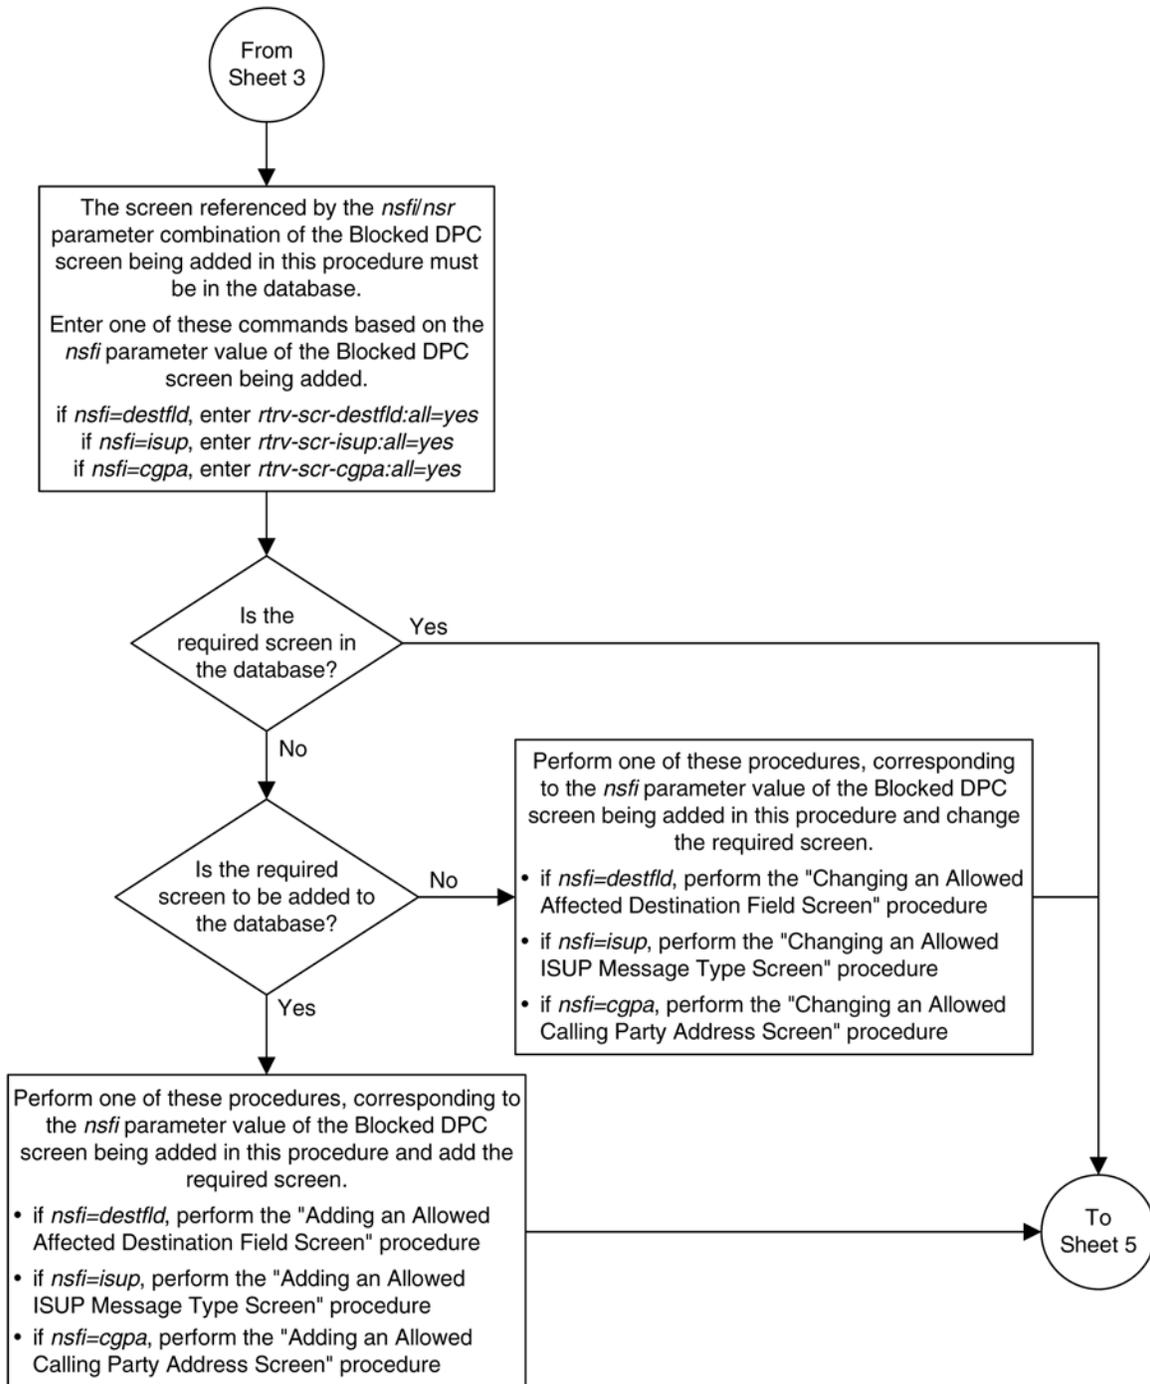

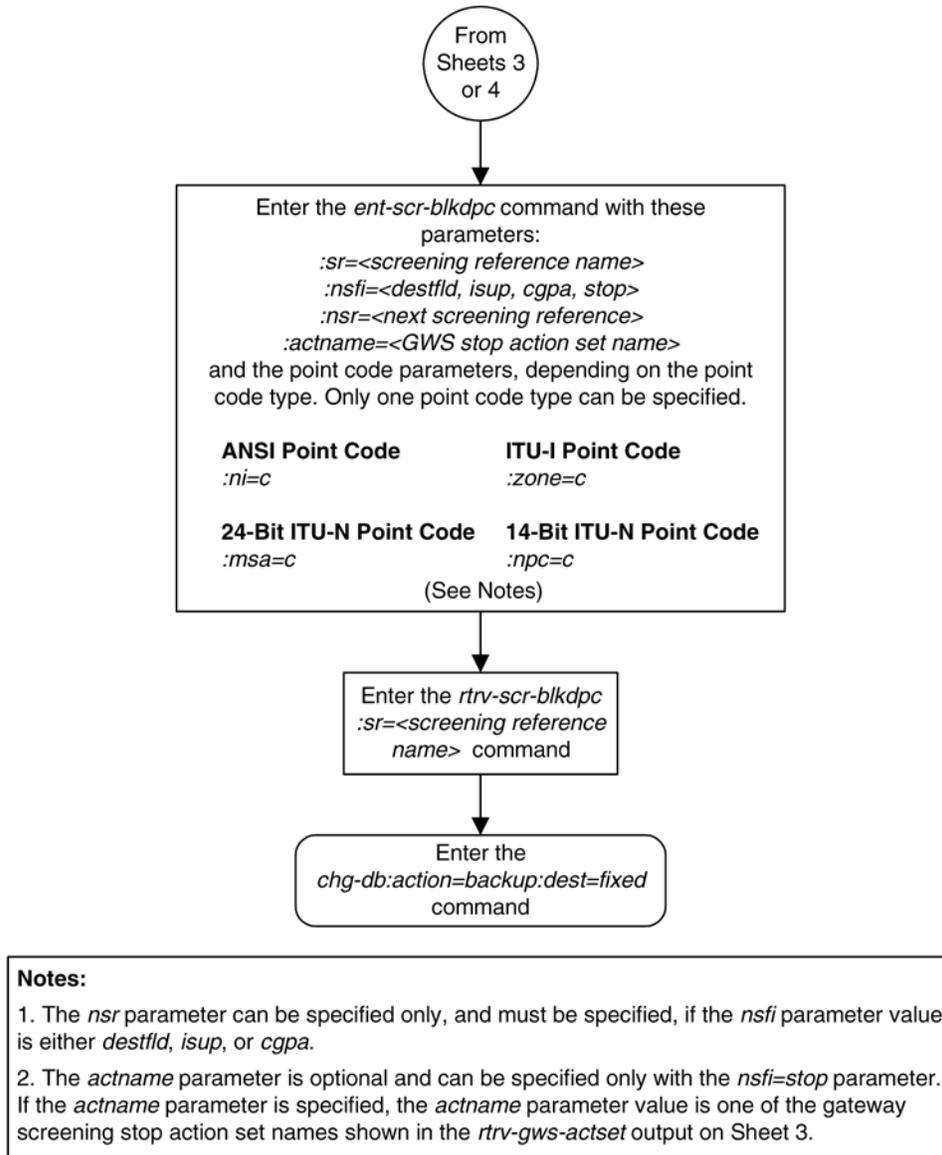

Removing a Blocked DPC Screen

This procedure is used to remove a blocked destination point code (DPC) screen from the database using the **dlt-scr-blkdpc** command. The parameters used by the **dlt-scr-blkdpc** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The example in this procedure removes the blocked DPC screen **iec** with the point code 240-001-010 from the database.

NOTE: If you using multiple-part ITU national point codes with gateway screening, see the [14-Bit ITU National Point Code Formats](#) section.

The **c-c-c** entry cannot be removed from the blocked DPC screen unless all other entries in the blocked DPC screen have been removed. The **c-c-c** entry cannot be removed from the blocked DPC screen if other screens reference the blocked DPC screen. If the last entry (**c-c-c**) in the blocked DPC screen is removed, the blocked DPC screen is removed. The blocked DPC screen can be referenced by one of the following screens.

- Screen Set
- Allowed OPC
- Blocked OPC
- Allowed SIO
- Allowed DPC

Verifying the Gateway Screening Configuration

Enter the following commands to verify that none of these screens reference the blocked DPC screen being removed from the database.

- **rtrv-scrset:nsfi=blkdpc**
- **rtrv-scr-opc:nsfi=blkdpc**
- **rtrv-scr-blkopc:nsfi=blkdpc**
- **rtrv-scr-sio:nsfi=blkdpc**
- **rtrv-scr-dpc:nsfi=blkdpc**

Gateway Screening Configuration Procedures

To change the NSFI of any of these screens, perform one of these procedures.

- [Changing a Screen Set](#)
- [Changing an Allowed OPC Screen](#)
- [Changing a Blocked OPC Screen](#)
- [Changing an Allowed SIO Screen](#)
- [Changing an Allowed DPC Screen](#)

Procedure

1. Display the blocked DPC screens in the database using the **rtrv-scr-blkdpc** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = BLOCKED DPC

SR   REF  RULES
IEC  YES   6
WRD2 YES   1
WRD3 NO    4
WRD4 YES   9
```

From the **rtrv-scr-blkdpc** output, display the blocked DPC screen you wish to remove using the **rtrv-scr-blkdpc** command with the screening reference name. For this example, enter this command.

```
rtrv-scr-blkdpc:sr=iec
```

The following is an example of the possible output.

```

rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = BLOCKED DPC
SR  NI      NC      NCM      NSFI     NSR/ACT
IEC 240     001     010     FAIL     -----
IEC 241     010     *       FAIL     -----
SR   NPC
IEC  00235
SR   ZONE   AREA   ID      NSFI     NSR/ACT
IEC  1      003   4      FAIL     -----
IEC  1      003   5      FAIL     -----
IEC  C      C      C      CGPA     cg01
    
```

2. Enter the commands in the [Verifying the Gateway Screening Configuration](#) section to verify that the screen being removed is not referenced by other screens in the database.

If the screen being removed is referenced by other screens, perform the procedures shown in the [Gateway Screening Configuration Procedures](#) section to change the NSFI of those screens to reference other screens or change the NSFI of these screens to STOP.

3. Remove the blocked DPC screen from the database using the **dlt-scr-blkdpc** command with the screening reference name shown in the **rtrv-scr-blkdpc** output in step 1 and with the point code parameter values (**ni**, **nc**, **ncm**, or **zone**, **area**, **id**, **npc**, **msa**, **ssa**, or **sp**) of the screen being removed from the database. The values for these parameters must be entered exactly as shown in the **rtrv-scr-blkdpc** output.

To remove an entry containing either an ITU-I or a 14-bit ITU-N spare point code, the **pcst=s** parameter must be specified with the **dlt-scr-blkdpc** command.

To remove an entry containing either an ITU-I or a 14-bit ITU-N non-spare point code, the **pcst** parameter does not have to be specified with the **dlt-scr-blkdpc** command. If the **pcst** parameter is specified, the value must be **none**.

The **pcst** parameter cannot be used with the **zone=c** or the **npc=c** parameters.

For this example, enter this command.

```
dlt-scr-blkdpc:sr=iec:ni=240:nc=001:ncm=010
```

A message similar to the following should appear.

```

rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
DLT-SCR-BLKDPC: SCREEN SET AFFECTED - IEC 25% FULL
DLT-SCR-BLKDPC: MASP A - COMPLTD
    
```

4. Verify the changes using the **rtrv-scr-blkdpc** command with the screening reference name used in step 3.

For this example, enter this command.

```
rtrv-scr-blkdpc:sr=iec
```

The following is an example of the possible output.

```

rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
SCREEN = BLOCKED DPC
SR  NI      NC      NCM      NSFI     NSR/ACT
IEC 241     010     *       FAIL     -----

SR   NPC
IEC  00235
SR   ZONE   AREA   ID      NSFI     NSR/ACT
IEC  1      003   4      FAIL     -----
    
```

SR	ZONE	AREA	ID	NSFI	NSR/ACT
IEC	1	003	4	FAIL	-----
IEC	1	003	5	FAIL	-----
IEC	C	C	C	CGPA	cg01

If the screen removed in step 3 was the last screen contained in the specified screening reference, the screening reference is removed from the database. The following message is displayed.


```
E2573 Cmd Rej: SR or NSR does not reference an existing SR
```

5. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.  
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.  
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.  
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 8-3. Removing a Blocked DPC Screen

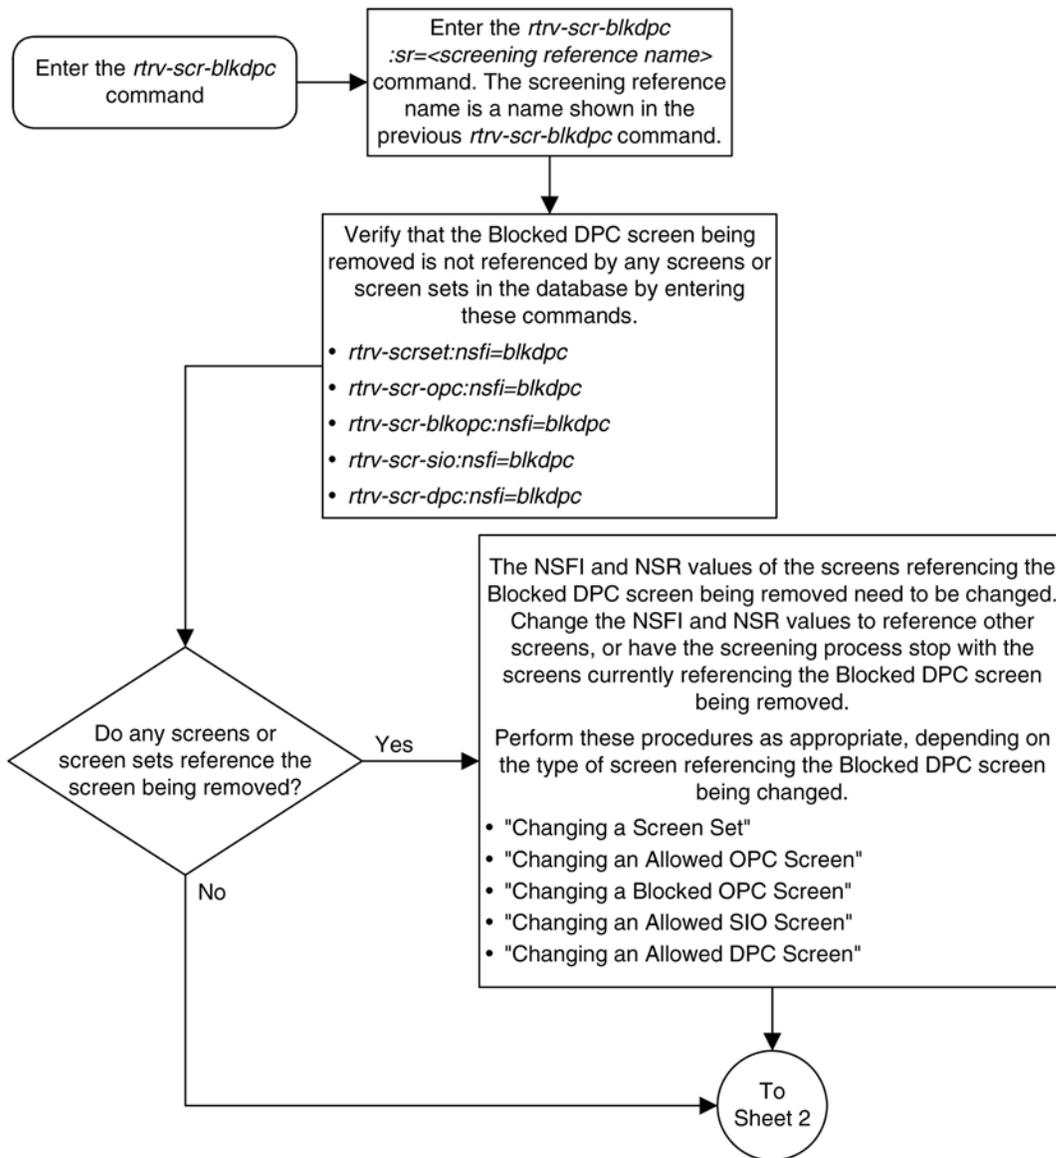

If the current **ni**, **nc**, and **ncm** are equal to the character " **c** ", only the next screening function identifier and next screening reference can be changed. The next screening function identifier cannot be equal to **fail**. If the next screening function identifier is not equal to **stop**, the next screening reference must be specified. Otherwise, only the blocked DPC can be changed.

The blocked DPC screen can reference one of the following screens.

- Allowed Affected Destination Field
- Allowed CGPA
- Allowed ISUP

Verifying the Gateway Screening Configuration

Enter the following commands to verify that these screens are in the database.

- **rtrv-scr-destfld:all=yes**
- **rtrv-scr-cgpa:all=yes**
- **rtrv-scr-isup:all=yes**

Gateway Screening Configuration Procedures

If the desired screen is not in the database, perform one of these procedures to add the desired screen to the database or change an existing screen in the database.

- [Adding an Allowed Affected Destination Field Screen](#)
- [Adding an Allowed Calling Party Address Screen](#)
- [Adding an Allowed ISUP Message Type Screen](#)
- [Changing an Allowed Affected Destination Field Screen](#)
- [Changing an Allowed Calling Party Address Screen](#)
- [Changing an Allowed ISUP Message Type Screen](#)

If the NSFI is **stop**, the screening of the message will stop at the specified blocked DPC screen. If the NSFI is either **cgpa**, **destfld**, or **isup**, then any message containing a point code that is not listed in the blocked DPC screen with a NSFI equal to **fail**, will continue to be screened with either the allowed CGPA, allowed DESTFLD, or allowed ISUP screen. All subsequent entries for that screening reference must contain a numeric point code value, the NSFI must be equal to **fail**, and the **nsr** parameter cannot be specified. Any message that contains a DPC in the blocked DPC screen with the NSFI equal to **fail** will be rejected from the network and the screening process is stopped.

The **pcst** or **npcst** parameters, specifying whether or not the ITU-I or 14-bit ITU-N point code is a spare point code, cannot be used with the **zone=c** or **npc=c** parameters.

Specifying a Range of Values

A range of values can be specified for the point code parameters **ni**, **nc**, or **ncm**.

If a range of values is specified for any of these parameters, and the value of the other parameters match existing values for the screening reference name, the range of values for the point code parameter cannot include any values for that parameter that are currently provisioned for the screening reference name.

For example, screening reference name **scr1** contains these entries:

```
SR      NI      NC      NCM      NSFI      NSR/ACT
```

```

SCR1  C      C      C      CGPA  cg01
SCR1  240   001   010   FAIL  -----
SCR1  241   010   020   FAIL  -----

```

Another entry for screening reference **scr1** with the **ni** value of 240 and the **nc** value of 001 cannot be specified if the range of values for the **ncm** parameter includes the value 010.

The ANSI point code parameter values can be specified as a single value, a range of values, or with an asterisk (*). The asterisk specifies all possible values for the **ni**, **nc**, and **ncm** parameters. [Table 8-5](#) shows the valid combinations of these parameter values.

Table 8-5. Valid Value Combinations for ANSI Point Code Parameters

NI	NC	NCM
Single Value	Single Value	Single Value
Single Value	Single Value	Range of Values
Single Value	Single Value	Asterisk
Single Value	Range of Values	Asterisk
Single Value	Asterisk	Asterisk
Range of Values	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

A range of values can also be specified for an ITU-I or 24-bit ITU-N point code parameter using a combination of asterisks (*) and single values for the point code parameters. [Table 8-6](#) shows the valid combinations of the ITU-I parameter values. [Table 8-7](#) shows the valid combinations of the 24-bit ITU-N parameter values.

Table 8-6. Valid Value Combinations for ITU-I Point Code Parameters

ZONE	AREA	ID
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Table 8-7. Valid Value Combinations for 24-Bit ITU-N Point Code Parameters

MSA	SSA	SP
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Procedure

1. Display the blocked DPC screens in the database using the **rtrv-scr-blkdpc** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = BLOCKED DPC
SR      REF  RULES
GW12   YES   2
IEC    YES   6
WRD2   YES   1
WRD3   NO    4
WRD4   YES   9
```

From the **rtrv-scr-blkdpc** output, display the blocked DPC screen you wish to change using the **rtrv-scr-blkdpc** command with the screening reference name. For this example, enter this command.

rtrv-scr-blkdpc:sr=gw12

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = BLOCKED DPC
SR  NI      NC      NCM      NSFI      NSR/ACT
GW12 C      C      C      CGPA      GW14
GW12 003    003    003    FAIL      -----
```

If a gateway screening stop action set is to be assigned to the blocked DPC screen being changed in the database, go to step 2.

Step 2 verifies the gateway screening stop action set names in the database. The gateway screening stop action set names are assigned only if the NSFI of the screen being changed in this procedure is STOP. If the NSFI of the screen will be changed to STOP, but a gateway screening stop action set name will not be assigned to the screen, skip steps 2 and 3 and go to step 4. If the NSFI of the screen will not be STOP, skip step 2 and go to step 3.

2. Display the gateway screening stop action sets in the database with the **rtrv-gws-actset** command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
ACT ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT
ID  NAME  1    2    3    4    5    6    7    8    9    10
--  ----  ---  ---  ---  ---  ---  ---  ---  ---  ---
1   copy  copy
2   rdct  rdct
3   cr    copy rdct
4   cnf   cnf
5   cpn   copy cnf
6   cnfrd cnf rdct
7   cpcfrd copy cnf rdct
```

GWS action set table is (7 of 16) 44% full

If the required gateway screening stop action set is not in the database, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure to configure the required gateway screening stop action set.

NOTE: If the NSFI of the screen being changed in this procedure will be STOP or FAIL, or if the NSFI of the screen is not being changed, skip step 3 and go to step 4.

3. Enter the commands in the [Verifying the Gateway Screening Configuration](#) section to verify that the screen that will be specified by the NSFI/NSR parameter combination in step 5 is in the database.

If the desired screen is not in the database, go to one of the procedures shown in the [Gateway Screening Configuration Procedures](#) section to add the desired screen to the database or change an existing screen in the database.

NOTE: If any of these conditions apply to this procedure, skip this step and go to step 5:

- The point code in the screen is not being changed.
 - The screen being changed contains either an ANSI or 24-bit ITU-N point code.
 - The ITU-I or 14-bit ITU-N non-spare point code in the screen is not being changed to an ITU-I or 14-bit ITU-N spare point code.
 - The point code in the screen is an ITU-I or 14-bit ITU-N spare point code or the screening reference contains other screens with ITU-I or 14-bit ITU-N spare point codes.
4. Display the status of the ITU National and International Spare Point Code Support feature by entering the **rtrv-ctrl-feat** command with the ITU National and International Spare Point Code Support feature part number.

Enter this command.

```
rtrv-ctrl-feat:partnum=893013601
```

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
The following features have been permanently enabled:
```

Feature Name	Partnum	Status	Quantity
Spare Point Code Support	893013601	on	----

The following features have been temporarily enabled:

Feature Name	Partnum	Status	Quantity	Trial Period Left
Zero entries found.				

The following features have expired temporary keys:

Feature Name	Partnum
Zero entries found.	

If the ITU National and International Spare Point Code Support feature is enabled, go to step 5.

If the ITU National and International Spare Point Code Support feature is not enabled, perform the “Activating the ITU National and International Spare Point Code Support Feature” procedure in the *Database Administration Manual - SS7* to enable the ITU National and International Spare Point Code Support feature as required. After the feature has been enabled, go to step 5.

5. Change the attributes of a blocked DPC screen using the **chg-scr-blkdpc** command.

If a gateway screening stop action is to be assigned to the blocked DPC screen being changed, enter the **chg-scr-blkdpc** command with the **nsfi=stop** parameter and the **actname** parameter with the name of a gateway screening stop action set shown in the output of the **rtrv-gws-actset** command executed in step 2.

The current values for the **ni**, **nc**, **ncm**, **zone**, **area**, **id**, **npc**, **msa**, **ssa**, and **sp** parameters must be entered exactly as shown in the **rtrv-scr-blkdpc** output in step 1.

The following list contains the values for the **nni**, **nnc**, **nncm**, **nzone**, **narea**, **nid**, **nnpc**, **nmsa**, **nssa**, and **nsp** parameters:

- **nni** – 0 - 255, c, or an asterisk (*)
- **nnc** – 0 - 255, c, or an asterisk (*)

- `nncm` – 0 - 255, c, or an asterisk (*)
- `nzone` – 0 - 7, c, or an asterisk (*)
- `narea` – 0 - 255, c, or an asterisk (*)
- `nid` – 0 - 7, c, or an asterisk (*)
- `nnpc` – 1 - 16383, c, or an asterisk (*)
- `nmsa` – 0 - 255, c, or an asterisk (*)
- `nssa` – 0 - 255, c, or an asterisk (*)
- `nsp` – 0 - 255, c, or an asterisk (*)

A range of values can be specified for the `nni`, `nnc`, and `nncm` parameters. See the [“Specifying a Range of Values”](#) section for more information on how the asterisk and a range of values are used for the `nni`, `nnc`, and `nncm` parameters.

To change an ITU-I or 14-bit ITU-N spare point code to a non-spare point code, both the `pcst=s` and `npcst=none` parameters must be specified with the `chg-scr-blkdpc` command.

To change an ITU-I or 14-bit ITU-N non-spare point code to a spare point code, the `npcst=s` parameter must be specified with the `chg-scr-blkdpc` command. The `pcst` parameter does not have to be specified.

If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N spare point code, the `pcst=s` parameter must be specified with the `chg-scr-blkdpc` command.

If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N non-spare point code, the `pcst` parameter does not have to be specified with the `chg-scr-blkdpc` command. If the `pcst` parameter is specified for a screen containing either an ITU-I or 14-bit ITU-N non-spare point code, the `pcst` parameter value must be `none`.

The `pcst` or `npcst` parameters cannot be used with the `zone=c` or `npc=c` parameters.

For this example, enter this command.

```
chg-scr-blkdpc:sr=gw12:ni=003:nc=003:nncm=003:nni=230:nnc=230 :nncm=230
```

The following messages appear.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
CHG-SCR-BLKDPC: SCREEN SET AFFECTED - GW12 1% FULL
CHG-SCR-BLKDPC: MASP A - COMPLTD
```

6. Verify the changes using the `rtrv-scr-blkdpc` command with the screening reference name used in step 5.

For this example, enter this command.

```
rtrv-scr-blkdpc:sr=gw12
```

The following is an example of the possible output.


```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
SCREEN = BLOCKED DPC
SR   NI      NC      NCM      NSFI     NSR/ACT
GW12 C        C        C        CGPA     GW14
GW12 230     230     230     FAIL     -----
```


7. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.  
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.  
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.  
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 8-4. Changing a Blocked DPC Screen

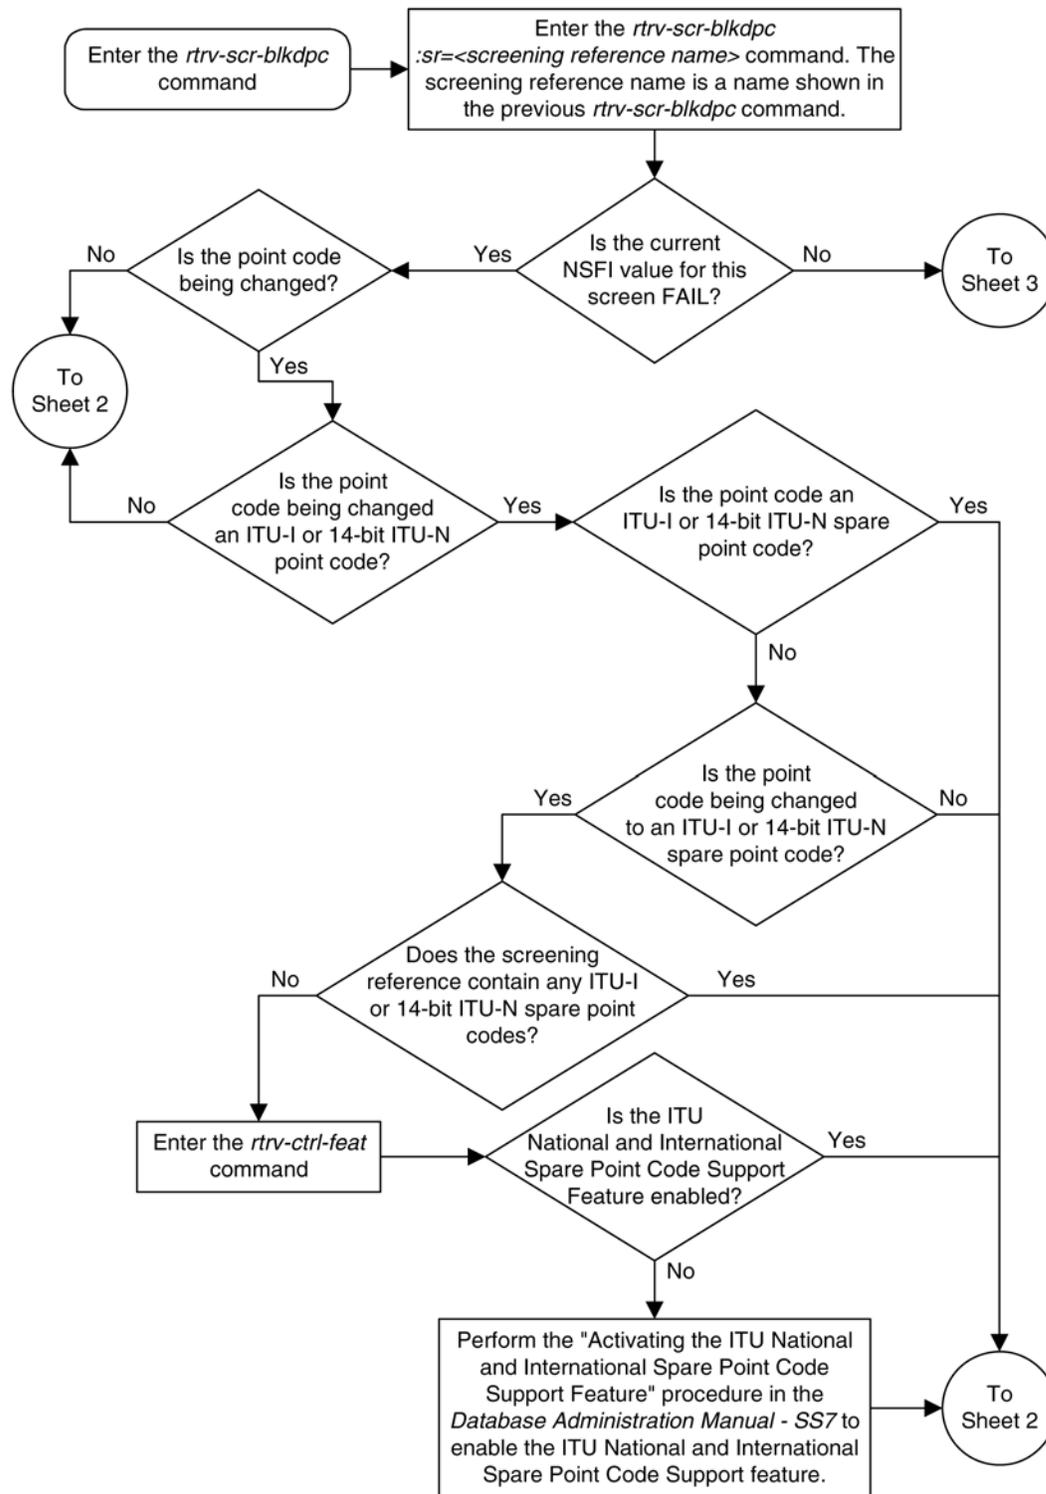



Enter the *chg-scr-blkdpc* command with this mandatory parameter:
:sr=<screening reference name>
 and the point code parameters, depending on the point code type contained in the screen being changed. Only one point code type can be specified.

ANSI Point Code	ITU-I Point Code	14-Bit ITU-N Point Code	24-Bit ITU-N Point Code
<i>:ni=<current ni value></i>	<i>:zone=<current zone value></i>	<i>:npc=<current npc value></i>	<i>:msa=<current msa value></i>
<i>:nc=<current nc value></i>	<i>:area=<current area value></i>	<i>:pcst=<s, none></i>	<i>:ssa=<current ssa value></i>
<i>:ncm=<current ncm value></i>	<i>:id=<current id value></i>		<i>:sp=<current sp value></i>
	<i>:pcst=<s, none></i>		

At least one of these optional point code parameters must be specified with the *chg-scr-blkdpc* command.


ANSI Point Code	ITU-I Point Code	14-Bit ITU-N Point Code	24-Bit ITU-N Point Code
<i>:nni=<0-255, *></i>	<i>:nzone=<0-7, *></i>	<i>:nnpc=<1-16383, *></i>	<i>:nmsa=<0-255, *></i>
<i>:nnc=<0-255, *></i>	<i>:narea=<0-255, *></i>	<i>:npcst=<s, none></i>	<i>:nssa=<0-255, *></i>
<i>:nncm=<0-255, *></i>	<i>:nid=<0-7, *></i>		<i>:nsp=<0-255, *></i>
	<i>:npcst=<s, none></i>		


The new point code code parameters must be of the same type as the current point code values specified in the *chg-scr-blkdpc* command
 (See Notes)


Enter the *rtv-scr-blkdpc*
:sr=<screening reference name> command

Enter the *chg-db:action=backup:dest=fixed* command

- Notes:**
1. A range of values can be specified for the *nni*, *nnc*, or *nncm* parameters by inserting double ampersands (&&) between the parameter values defining the range. For example, to specify the range 025 to 200 for the *nni* parameter, enter 025&&200 for the *nni* parameter value.
 2. The current values for the *ni*, *nc*, *ncm*, *zone*, *area*, *id*, *npc*, *msa*, *ssa*, or *sp* parameters must be entered exactly as shown in the *rtv-scr-blkdpc* output. The current point code value cannot be C.
 3. The asterisk (*) specifies the entire range of values for that parameter.
- For more information about specifying a range of values and about using the asterisk, see the "Gateway Screening Attributes" section in Chapter 2 and the "Specifying a Range of Values" section in this procedure.
4. To change an ITU-I or 14-bit ITU-N spare point code to a non-spare point code, both the *pcst=s* and *npcst=none* parameters must be specified with the *chg-scr-blkdpc* command.
 5. To change an ITU-I or 14-bit ITU-N non-spare point code to a spare point code, the *npcst=s* parameter must be specified with the *chg-scr-blkdpc* command. The *pcst* parameter does not have to be specified.
 6. If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N spare point code, the *pcst=s* parameter must be specified with the *chg-scr-blkdpc* command.
 7. If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N non-spare point code, the *pcst* parameter does not have to be specified with the *chg-scr-blkdpc* command. If the *pcst* parameter is specified for a screen containing either an ITU-I or 14-bit ITU-N non-spare point code, the *pcst* parameter value must be *none*.

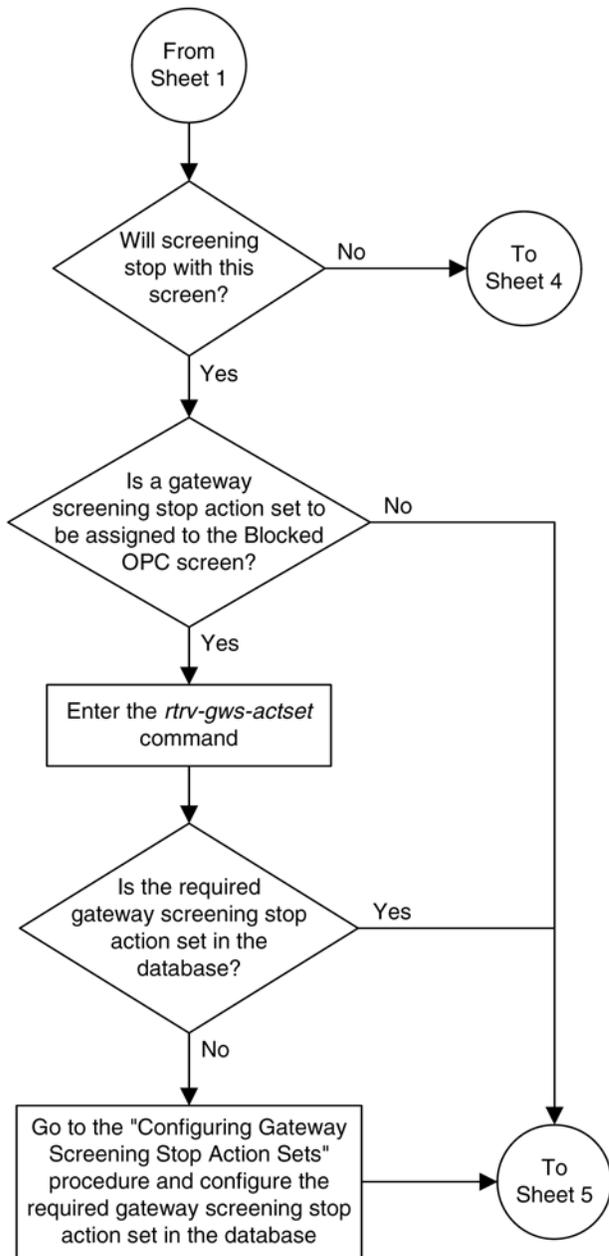

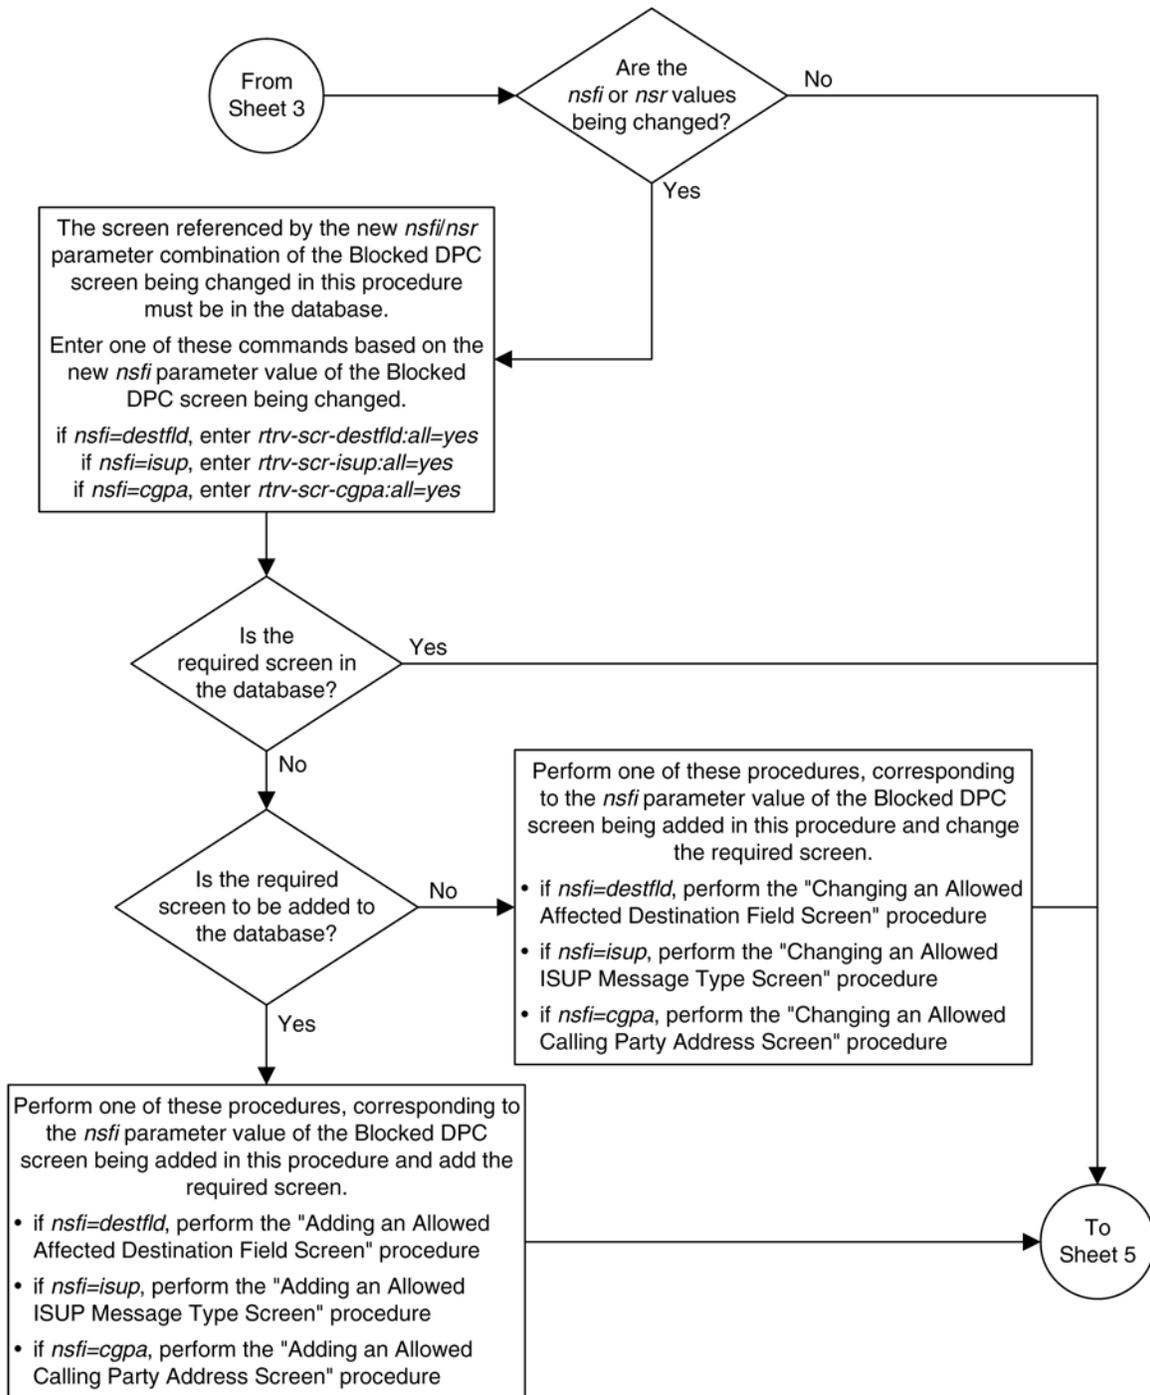

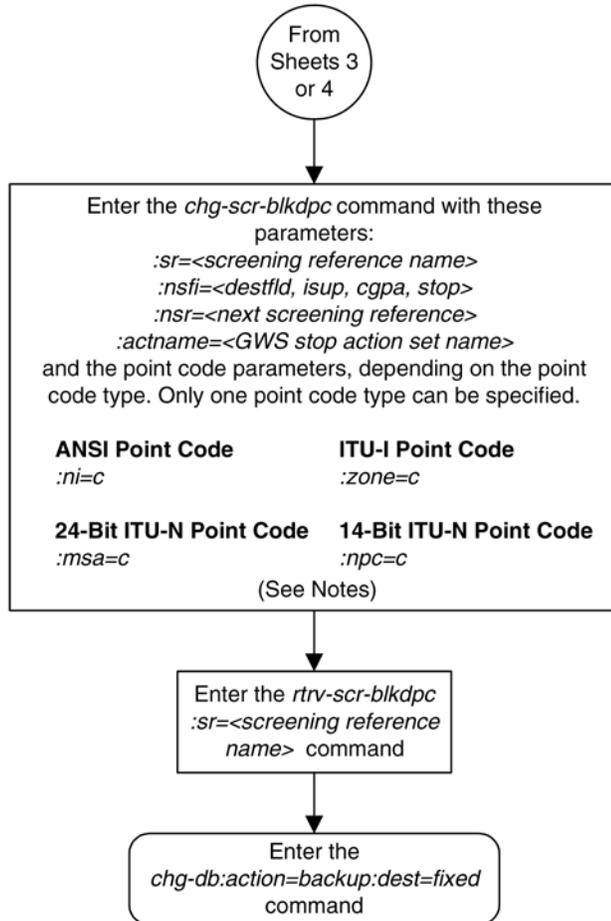

Notes:

1. The *nsr* parameter can be specified only, and must be specified, if the *nsfi* parameter value is either *destfld*, *isup*, or *cgpa*.
2. The *actname* parameter is optional and can be specified only with the *nsfi=stop* parameter. If the *actname* parameter is specified, the *actname* parameter value is one of the gateway screening stop action set names shown in the *rtv-gws-actset* output on Sheet 3.

Allowed Destination Point Code (DPC) Screen Configuration

Introduction	9-1
Adding an Allowed DPC Screen	9-7
Removing an Allowed DPC Screen	9-19
Changing an Allowed DPC Screen	9-22

Introduction

The allowed destination point code (DPC) screen identifies a set of DPC's that are allowed to receive SS7 messages from another network. The gray shaded areas in [Figure 9-1](#) shows the fields of the SS7 message that are checked by the allowed DPC screening function. If a match is found, the **nsfi** is examined to determine the next step in the screening process. If the **nsfi** is equal to **stop**, the message is processed and no further screening takes place.

If the **nsfi** is equal to **stop**, and the **copy** gateway screening stop action is specified, the message is processed and a copy of the message is sent by the STPLAN feature to an external application.

If the **nsfi** is equal to **stop**, and the **rdct** (redirect) gateway screening stop action is specified, the message is diverted from the original destination and sent to another destination with the Database Transport Access feature, specified by global title translation, for further processing.

If the Calling Name Conversion Facility (CNCF) feature is on, the **nsfi** is equal to **stop**, and the **cncf** gateway screening stop action is specified, the PIP parameter in the incoming ISUP IAM message is converted to the GN parameter. The GN parameter in the incoming ISUP IAM message is converted to the PIP parameter. The message is then sent to the node specified by the DPC in the routing label in the message. For more information on the Calling Name Conversion Facility feature, see [Chapter 14 Calling Name Conversion Facility \(CNCF\) Configuration](#).

If the Triggerless LNP (TLNP) feature is on, the **nsfi** is equal to **stop**, and the **tlnp** gateway screening stop action is specified, ISUP IAMs that pass gateway screening are processed either by the ISUP NP with EPAP feature (if the ISUP NP with EPAP feature is enabled and turned on) or by the Triggerless LNP feature (if the Triggerless LNP feature is turned on). The ISUP NP with EPAP feature is discussed in more detail in the *Feature Manual - G-Port*. The Triggerless LNP feature is discussed in more detail in the *LNP Feature Activation Guide*.


If the Triggerless ISUP based Number Portability (TINP) feature is enabled, the **nsfi** is equal to **stop**, and the **tinp** gateway screening stop action is specified, ISUP IAMs that pass gateway screening are intercepted by the


Triggerless ISUP based Number Portability (TINP) feature and converted to include the routing number (RN) if the call is to a ported number. The TINP feature is discussed in more detail in the *Feature Manual - G-Port*.


If the **nsfi** is equal to anything else, the next screening reference (**nsr**) is identified and the screening process continues to the next screen identified by the **nsfi** and **nsr** parameters. If no match is found, the message is discarded.


[Flowchart 9-32](#) shows the screening action of the allowed DPC screen.

Flowchart 9-1. Allowed DPC Screening Action

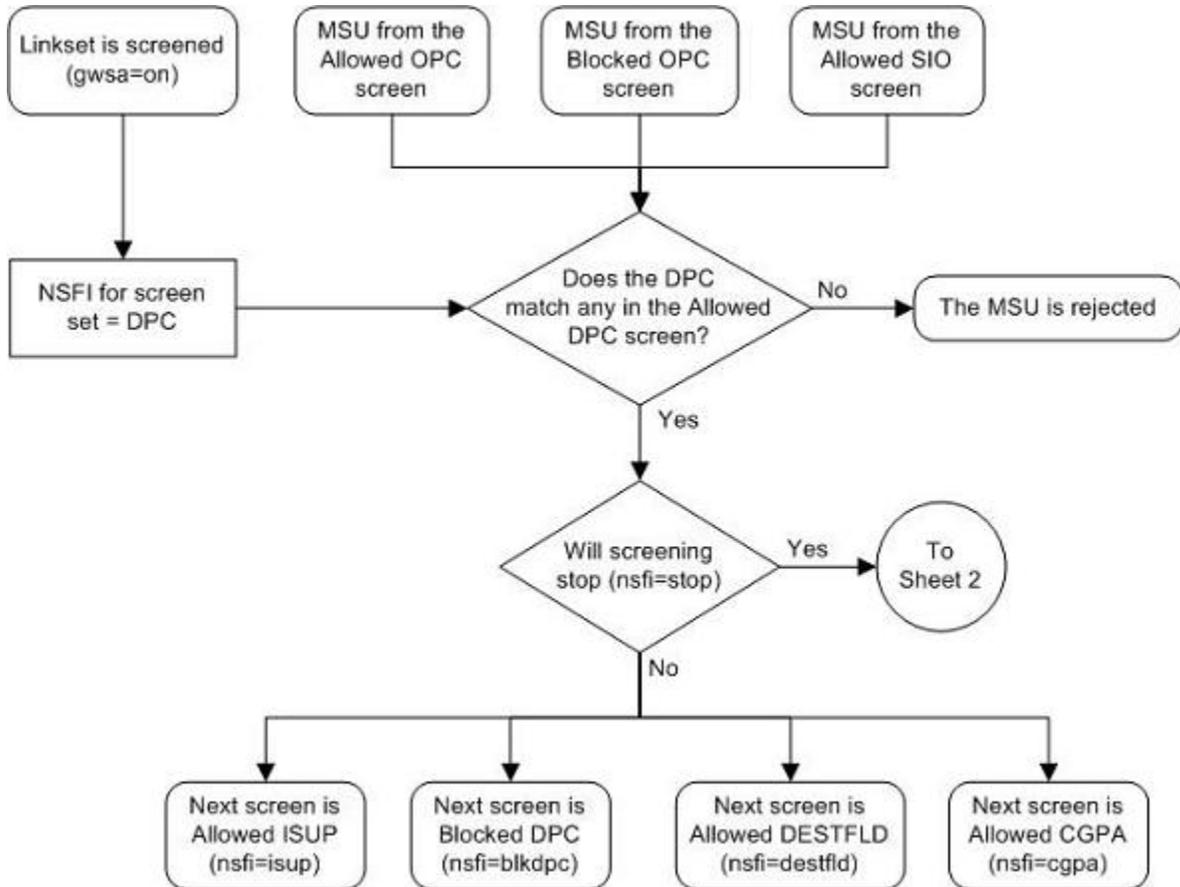

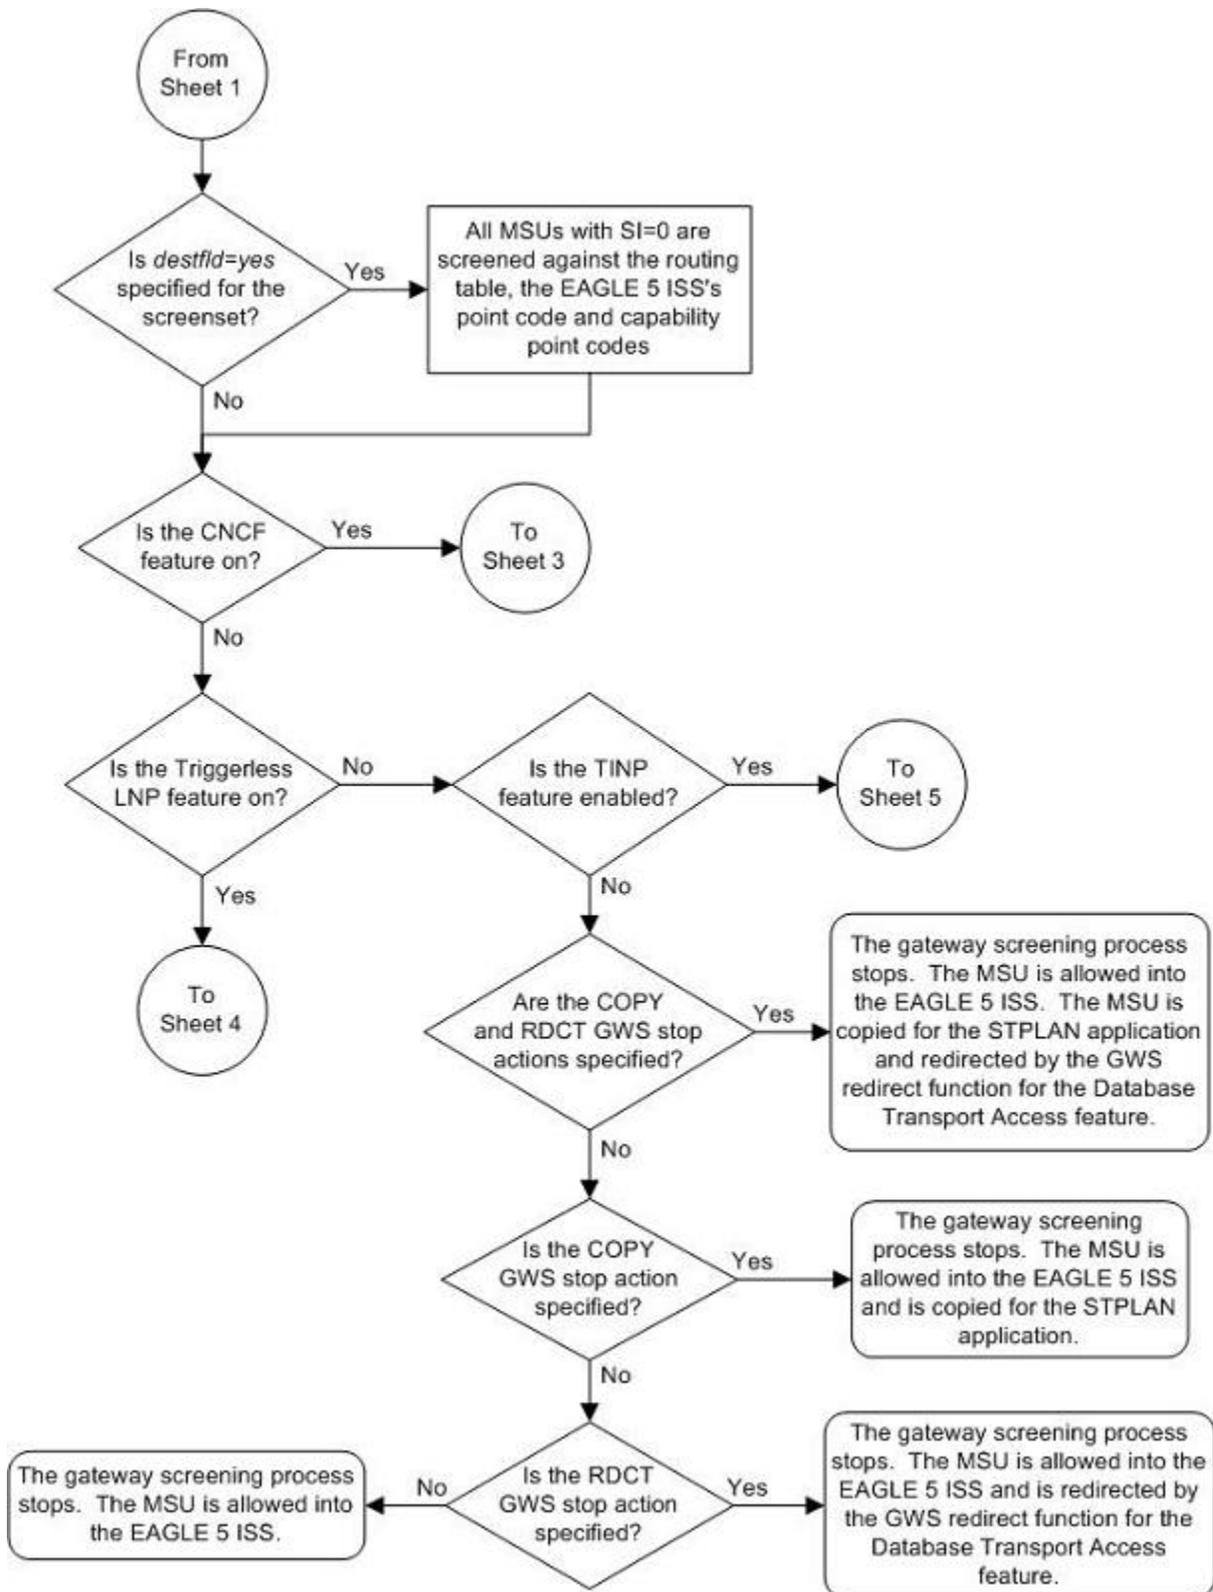

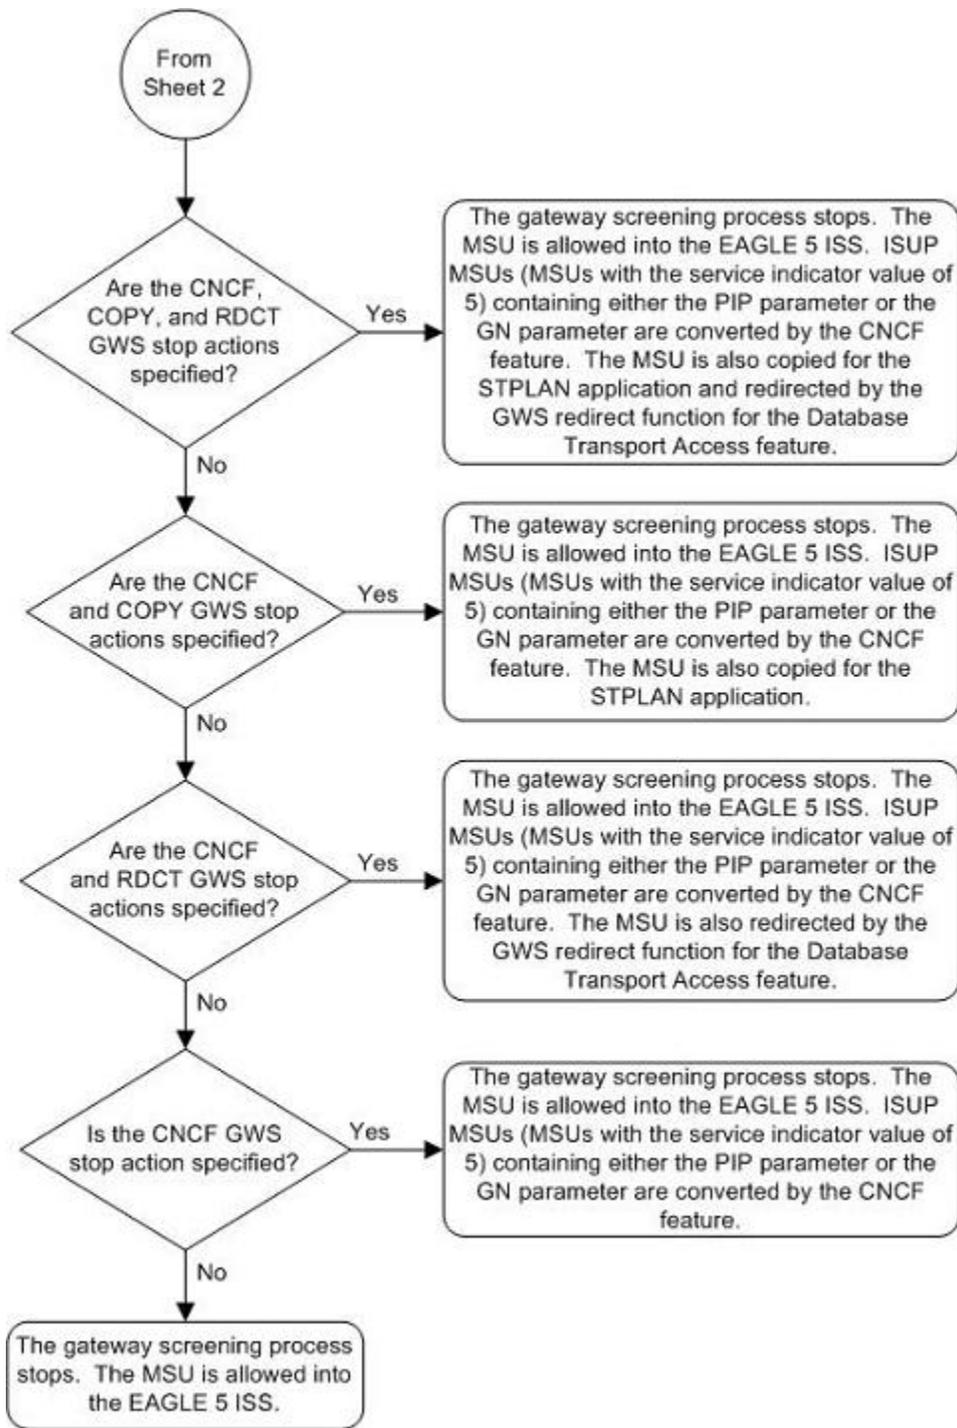

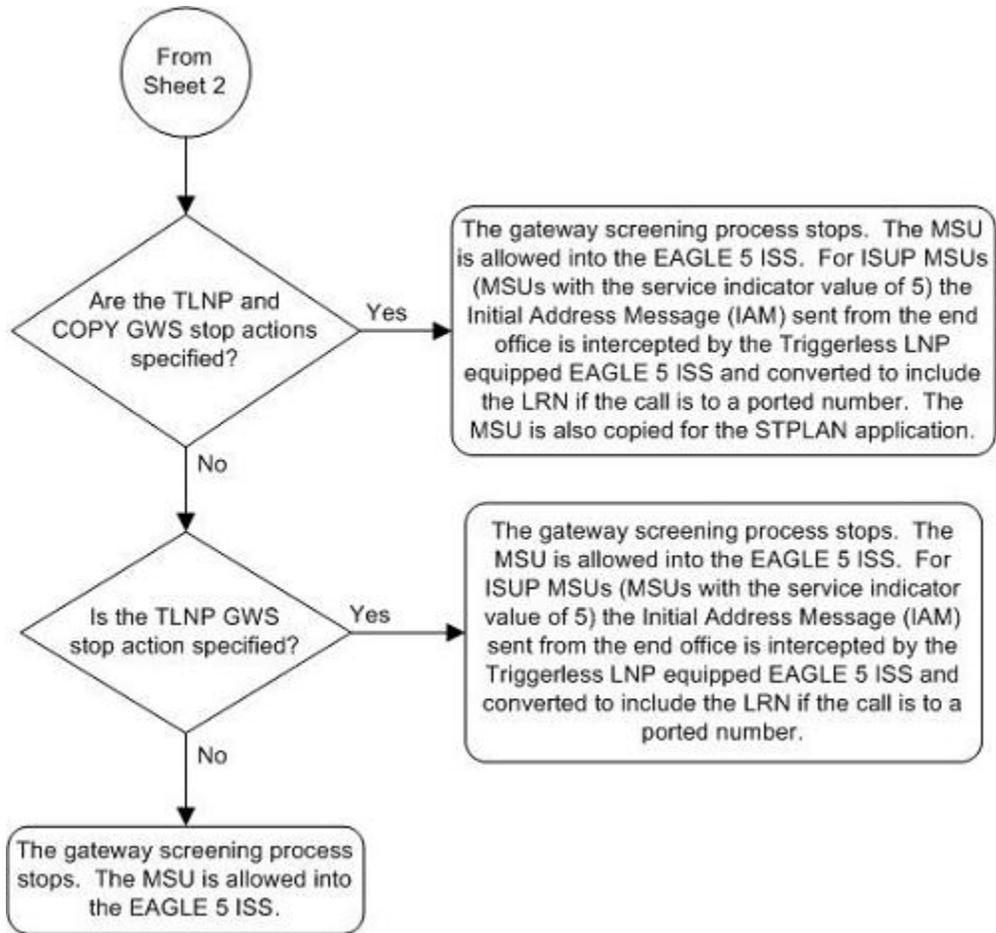


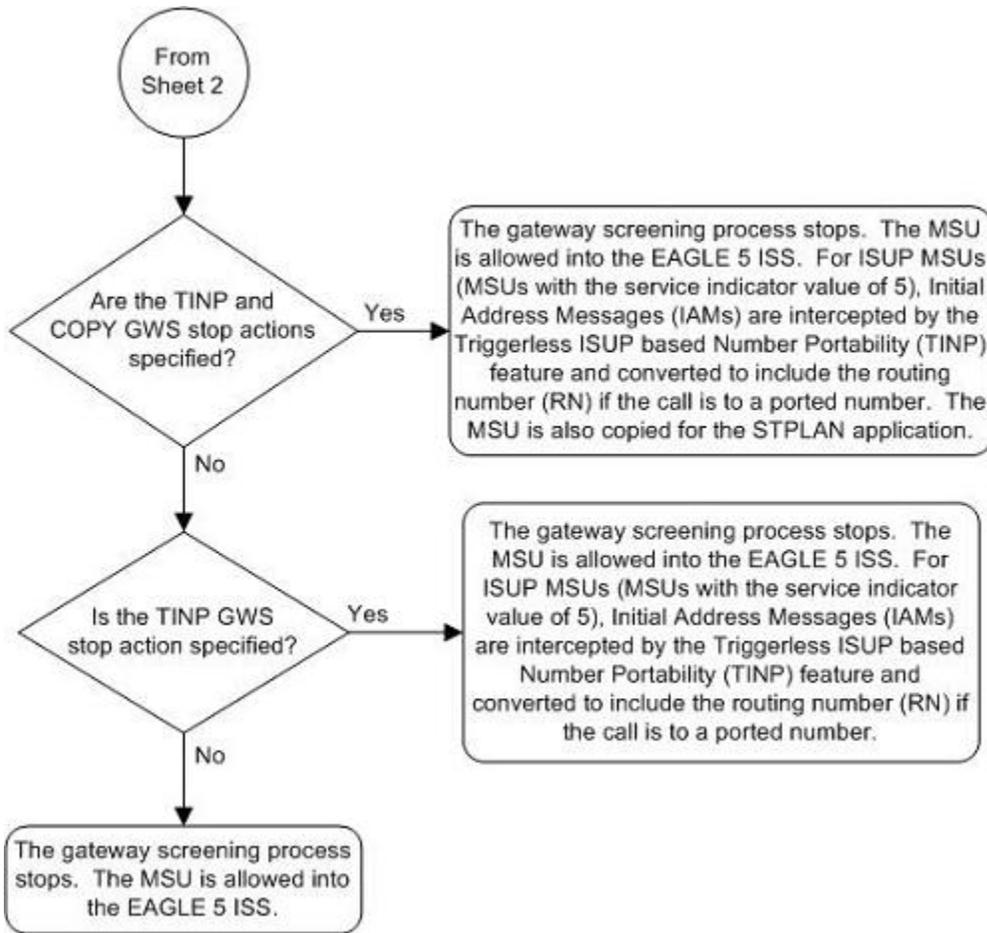


Figure 9-1. Allowed DPC Screening Functions

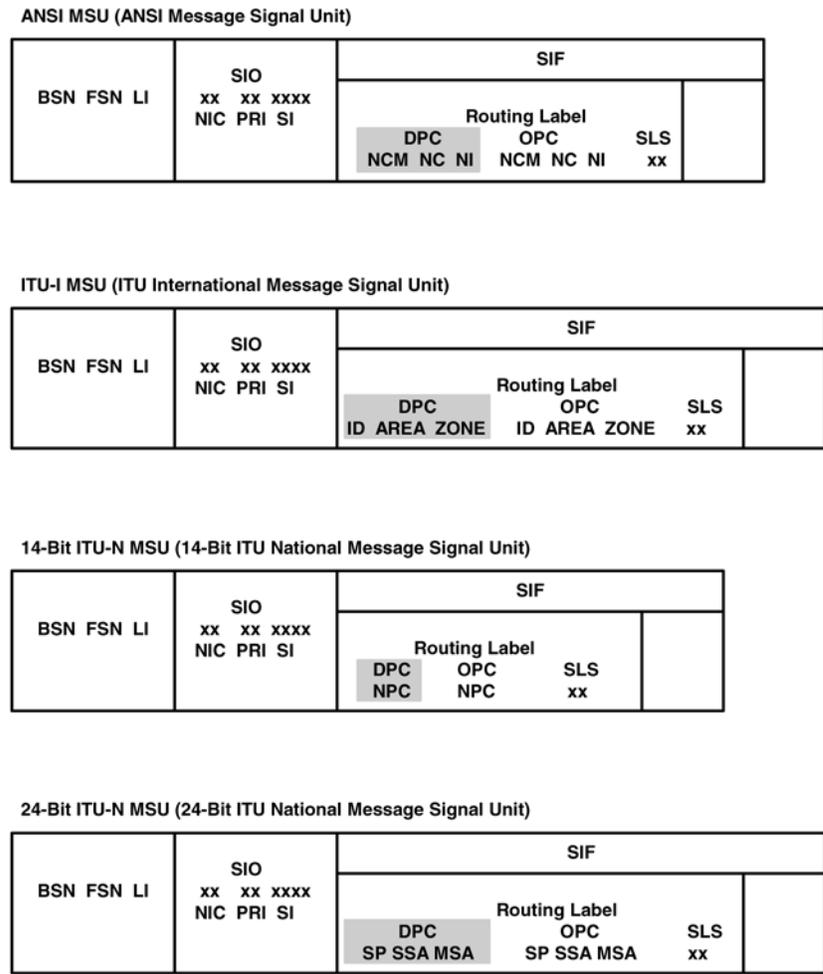

Adding an Allowed DPC Screen

This procedure is used to add an allowed destination point code (DPC) screen to the database using the **ent-scr-dpc** command. The parameters used by the **ent-scr-dpc** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The examples in this procedure are used to add the allowed DPC screen data shown in [Table 9-1](#) and based on the example configurations shown in [Figure 2-3](#), [Figure 2-5](#), and [Figure 2-9](#).

Table 9-1. Example Gateway Screening Allowed DPC Configuration Table

Screening Reference	NI	NC	NCM	NSFI	NSR
gws9	003	003	003	blkdpc	gw12
iec	070	070	025&&135	blkdpc	gws9

Screening Reference	NI	NC	NCM	NSFI	NSR
isp2	073	200	059	isup	isp2
tup1	050	034	049	isup	tup1

NOTE: If you using multiple-part ITU national point codes with gateway screening, see the [14-Bit ITU National Point Code Formats](#) section.

The allowed DPC screen can reference one of the following screens.

- Blocked DPC
- Allowed Affected Destination Field
- Allowed CGPA
- Allowed ISUP

Verifying the Gateway Screening Configuration

Enter the following commands to verify that these screens are in the database.

- `rtrv-scr-blkdpc:all=yes`
- `rtrv-scr-destfld:all=yes`
- `rtrv-scr-cgpa:all=yes`
- `rtrv-scr-isup:all=yes`

Gateway Screening Configuration Procedures

If the desired screen is not in the database, perform one of these procedures to add the desired screen to the database or change an existing screen in the database.

- [Adding a Blocked DPC Screen](#)
- [Adding an Allowed Affected Destination Field Screen](#)
- [Adding an Allowed Calling Party Address Screen](#)
- [Adding an Allowed ISUP Message Type Screen](#)
- [Changing a Blocked DPC Screen](#)
- [Changing an Allowed Affected Destination Field Screen](#)
- [Changing an Allowed Calling Party Address Screen](#)
- [Changing an Allowed ISUP Message Type Screen](#)

Specifying a Range of Values

A range of values can be specified for the point code parameters **ni**, **nc**, or **ncm**.

If a range of values is specified for any of these parameters, and the value of the other parameters match existing values for the screening reference name, the range of values for the point code parameter cannot include any values for that parameter that are currently provisioned for the screening reference name.

For example, screening reference name **scr1** contains these entries:

```
SR      NI      NC      NCM      NSFI      NSR/ACT
```

```
SCR1 240 001 010 CGPA -----
SCR1 241 010 020 STOP -----
```

Another entry for screening reference **scr1** with the **ni** value of 240 and the **nc** value of 001 cannot be specified if the range of values for the **ncm** parameter includes the value 010.

The ANSI point code parameter values can be specified as a single value, a range of values, or with an asterisk (*). The asterisk specifies all possible values for the **ni**, **nc**, and **ncm** parameters. [Table 9-2](#) shows the valid combinations of these parameter values.

Table 9-2. Valid Value Combinations for ANSI Point Code Parameters

NI	NC	NCM
Single Value	Single Value	Single Value
Single Value	Single Value	Range of Values
Single Value	Single Value	Asterisk
Single Value	Range of Values	Asterisk
Single Value	Asterisk	Asterisk
Range of Values	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

A range of values can also be specified for an ITU-I or 24-bit ITU-N point code parameter using a combination of asterisks (*) and single values for the point code parameters. [Table 9-3](#) shows the valid combinations of the ITU-I parameter values. [Table 9-4](#) shows the valid combinations of the 24-bit ITU-N parameter values.

Table 9-3. Valid Value Combinations for ITU-I Point Code Parameters

ZONE	AREA	ID
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Table 9-4. Valid Value Combinations for 24-Bit ITU-N Point Code Parameters

MSA	SSA	SP
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Procedure

1. Verify that the gateway screening feature is on, by entering the **rtrv-feat** command.

If the gateway screening feature is on, the **GWS** field is set to **on**.

NOTE: The `rtrv-feat` command output contains other fields that are not used by this procedure. If you wish to see all the fields displayed by the `rtrv-feat` command, see the `rtrv-feat` command description in the *Commands Manual*.

If the gateway screening feature is on, shown by the entry `GWS = on` in the `rtrv-feat` command output, skip step 2, and go to step 3.

- Turn the gateway screening feature on by entering this command.

```
chg-feat:gws=on
```

NOTE: Once the gateway screening feature is turned on with the `chg-feat` command, it cannot be turned off.

NOTE: The gateway screening feature must be purchased before you turn this feature on with the `chg-feat` command. If you are not sure if you have purchased the gateway screening feature, contact your Tekelec Sales Representative or Account Representative.

When the `chg-feat` has successfully completed, this message should appear.

```
rlghncxa03w 06-10-28 11:43:04 GMT EAGLE5 36.0.0
CHG-FEAT: MASP A - COMPLTD
```

- Display all allowed DPC screens in the database using the `rtrv-scr-dpc` command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED DPC
SR  REF  RULES
IEC  YES   6
WRD2 YES   1
WRD4 YES   9
```

If the screening reference names that you wish to add with this procedure are not shown in the `rtrv-scr-dpc` command output, go to step 2. For this example, the screening reference names are not shown. If these screening reference names are shown in the `rtrv-scr-dpc` command output, make sure the screening data you wish to enter is not already in the database by entering the `rtrv-scr-dpc` command with the screening reference name. For example, enter the `rtrv-scr-dpc:sr=iec` command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED DPC
SR  NI      NC      NCM      NSF1     NSR/ACT
IEC  240      001     010     STOP     -----
IEC  241      010     *       CGPA     cg04
SR   NPC
IEC  00235
IEC  00240
SR   ZONE   AREA   ID      NSF1     NSR/ACT
IEC  1       003    4       BLKDPC  blk1
IEC  1       003    5       STOP     -----
```

If a gateway screening stop action set is to be assigned to the allowed DPC screen being added to the database, go to step 4.

Step 4 verifies the gateway screening stop action set names in the database. The gateway screening stop action set names are assigned only if the NSF1 of the screen being added in this procedure is STOP. If the NSF1 of the new screen will be STOP, but a gateway screening stop action set name will not be assigned to

the new screen, skip steps 4, 5, and 6 and go to step 7. If the NSFI of the new screen is not STOP, skip step 4 and 5, and go to step 6.

4. Display the gateway screening stop action sets in the database with the `rtrv-gws-actset` command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
ACT  ACT
ID   NAME  1    2    3    4    5    6    7    8    9    10
---  ---  ---  ---  ---  ---  ---  ---  ---  ---  ---
1    copy  copy
2    rdct  rdct
3    cr    copy rdct
4    cnf   cnf
5    cpcnf copy cnf
6    cnf   rdct
7    cpcnf copy cnf rdct
```

GWS action set table is (7 of 16) 44% full

If the required gateway screening stop action set is not in the database, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure to configure the required gateway screening stop action set.

NOTE: If the gateway screening stop action set being assigned to the Allowed DPC screen does not contain the redirect stop action, skip step 5 and go to step 6.

5. Verify the EAGLE 5 ISS's point code by entering the `rtrv-sid` command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-10 11:43:04 GMT EAGLE5 36.0.0
PCA          PCI          PCN          CLLI          PCTYPE
100-100-100  3-75-7          7-9-8-1     rlghncxa03w  OTHER

CPCA
002-002-002  002-002-003    002-002-004  002-002-005
002-002-006  002-002-007    002-002-008  002-002-009
004-002-001  004-003-003    050-060-070

CPCA (LNP)
005-005-002  005-005-004    005-005-005  006-006-006

CPCI
1-002-1      1-002-2        1-002-3      1-002-4
2-001-1      7-222-7

CPCN
2-0-10-3     2-0-11-0      2-0-11-2     2-0-12-1
2-2-3-3     2-2-4-0      10-14-10-1
```



CAUTION: Redirecting SLTA/SLTM messages prevents SLTA/SLTM messages from being returned to the EAGLE 5 ISS. The signaling link carrying these messages will fail if these messages are not returned to the EAGLE 5 ISS. To prevent SLTA/SLTM messages from being redirected, gateway screening stop action sets containing the redirect stop action should not be assigned to Allowed DPC screens containing the EAGLE 5 ISS's point code.

NOTE: If the NSFI of the screen being added in this procedure is STOP, skip step 6 and go to step 7.

6. Enter the commands in the [Verifying the Gateway Screening Configuration](#) section to verify that the screen that will be specified by the NSFI/NSR parameter combination in step 8 is in the database.

If the desired screen is not in the database, perform one of the procedures shown in the [Gateway Screening Configuration Procedures](#) section to add the desired screen to the database or change an existing screen in the database.

NOTE: If the point code being added in this procedure is not an ITU-I or 14-bit ITU-N spare point code, continue the procedure with step 8.

NOTE: If the point code being added in this procedure is an ITU-I or 14-bit ITU-N spare point code and the screening reference contains ITU-I or 14-bit ITU-N spare point codes, continue the procedure with step 8.

7. Display the status of the ITU National and International Spare Point Code Support feature by entering the **rtrv-ctrl-feat** command with the ITU National and International Spare Point Code Support feature part number.

Enter this command.

```
rtrv-ctrl-feat:partnum=893013601
```

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
The following features have been permanently enabled:
```

Feature Name	Partnum	Status	Quantity
Spare Point Code Support	893013601	on	----

The following features have been temporarily enabled:

Feature Name	Partnum	Status	Quantity	Trial Period Left
Zero entries found.				

The following features have expired temporary keys:

Feature Name	Partnum
Zero entries found.	

If the ITU National and International Spare Point Code Support feature is enabled, go to step 8.

If the ITU National and International Spare Point Code Support feature is not enabled, perform the “Activating the ITU National and International Spare Point Code Support Feature” procedure in the *Database Administration Manual - SS7* to enable the ITU National and International Spare Point Code Support feature as required. After the feature has been enabled, go to step 8.

8. Add a new allowed DPC screen to the database using the **ent-scr-dpc** command.

If a gateway screening stop action is to be assigned to the allowed DPC screen being added, enter the **ent-scr-dpc** command with the **nsfi=stop** parameter and the **actname** parameter with the name of a gateway screening stop action set shown in the output of the **rtrv-gws-actset** command executed in step 4.



CAUTION: Redirecting SLTA/SLTM messages prevents SLTA/SLTM messages from being returned to the EAGLE 5 ISS. The signaling link carrying these messages will fail if these messages are not returned to the EAGLE 5 ISS. To prevent SLTA/SLTM messages from being redirected, gateway screening stop action sets containing the redirect stop action should not be assigned to Allowed DPC screens containing the EAGLE 5 ISS’s point code, shown in step 5.

The following list contains the values for **ni**, **nc**, **ncm**, **zone**, **area**, **id**, **npc**, **msa**, **ssa**, and **sp** parameters:

- ni – 0 - 255 or an asterisk (*)
- nc – 0 - 255 or an asterisk (*)
- ncm – 0 - 255 or an asterisk (*)
- zone – 0 - 7 or an asterisk (*)
- area – 0 - 255 or an asterisk (*)
- id – 0 - 7 or an asterisk (*)
- npc – 1 - 16383 or an asterisk (*)
- msa – 0 - 255 or an asterisk (*)
- ssa – 0 - 255 or an asterisk (*)
- sp – 0 - 255 or an asterisk (*)

A range of values can be specified for the **ni**, **nc**, and **ncm** parameters. See the [“Specifying a Range of Values”](#) section for more information on how the asterisk and a range of values are used for the **ni**, **nc**, and **ncm** parameters. To add a spare point code to the allowed DPC screen, the **pcst=s** parameter must be specified.

To add a non-spare point code to the allowed DPC screen, the **pcst** parameter does not have to be specified. If the **pcst** parameter is specified for a screen containing an ITU-I or 14-bit ITU-N non-spare point code, the value must be **none**.

For this example, enter these commands.

```
ent-scr-dpc:sr=gws9:ni=003:nc=003:ncm=003:nsfi=blkdpc:nsr=gw12
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
ENT-SCR-DPC: SCREEN SET AFFECTED - GWS9 1% FULL
ENT-SCR-DPC: MASP A - COMPLTD
```

```
ent-scr-dpc:sr=isp2:ni=073:nc=200:ncm=059:nsfi=isup:nsr=isp2
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:29:30 GMT EAGLE5 36.0.0
ENT-SCR-DPC: SCREEN SET AFFECTED - ISP2 1% FULL
ENT-SCR-DPC: MASP A - COMPLTD
```

```
ent-scr-dpc:sr=tup1:ni=050:nc=034:ncm=059:nsfi=isup:nsr=tup1
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:29:30 GMT EAGLE5 36.0.0
ENT-SCR-DPC: SCREEN SET AFFECTED - TUP1 1% FULL
ENT-SCR-DPC: MASP A - COMPLTD
```

```
ent-scr-dpc:sr=iec:ni=070:nc=070:ncm=025&&135:nsfi=blkdpc :nsr=gws9
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:29:30 GMT EAGLE5 36.0.0
ENT-SCR-DPC: SCREEN SET AFFECTED - IEC 1% FULL
ENT-SCR-DPC: MASP A - COMPLTD
```

9. Verify the changes using the **rtrv-scr-dpc** command with the screening reference name used in step 8.

For this example, enter these commands.

rtrv-scr-dpc:sr=gws9

The following is an example of the possible output.

```
r1ghncxa03w 06-10-25 15:30:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED DPC
SR   NI      NC      NCM      NSF1     NSR/ACT
GWS9 003     003     003     BLKDPC  GW12
```

rtrv-scr-dpc:sr=iec

The following is an example of the possible output.

```
r1ghncxa03w 06-10-25 15:31:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED DPC
SR   NI      NC      NCM      NSF1     NSR/ACT
IEC  070     070     025&&135 BLKDPC  GWS9
```

rtrv-scr-dpc:sr=isp2

The following is an example of the possible output.

```
r1ghncxa03w 06-10-25 15:31:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED DPC
SR   NI      NC      NCM      NSF1     NSR/ACT
ISP2 073     200     059     ISUP     ISP2
```

rtrv-scr-dpc:sr=tup1

The following is an example of the possible output.


```
r1ghncxa03w 06-10-25 15:31:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED DPC
SR   NI      NC      NCM      NSF1     NSR/ACT
TUP1 050     034     049     ISUP     TUP1
```


10. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.


The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.


```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 9-2. Adding an Allowed DPC Screen

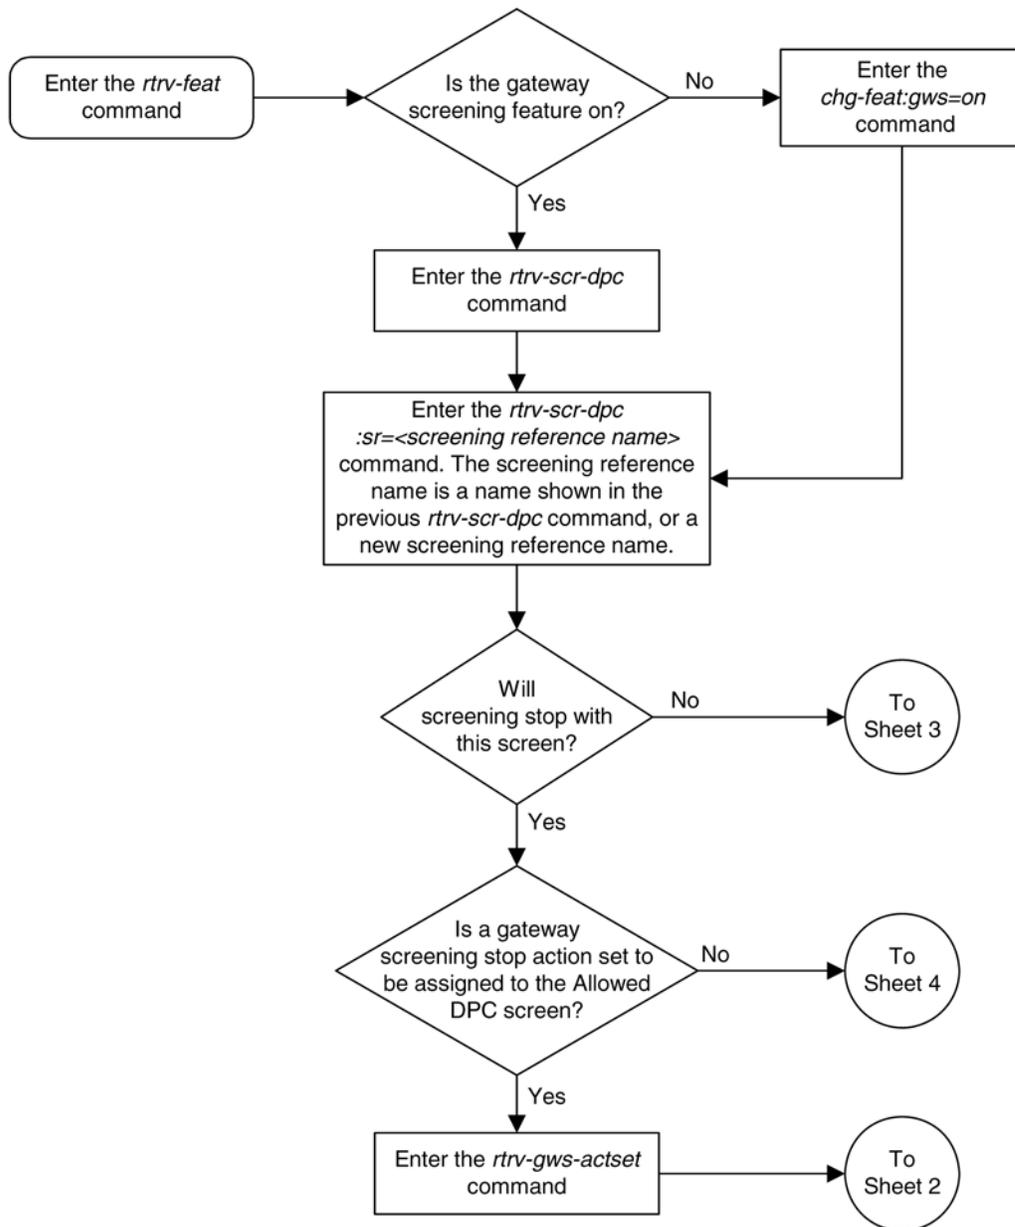

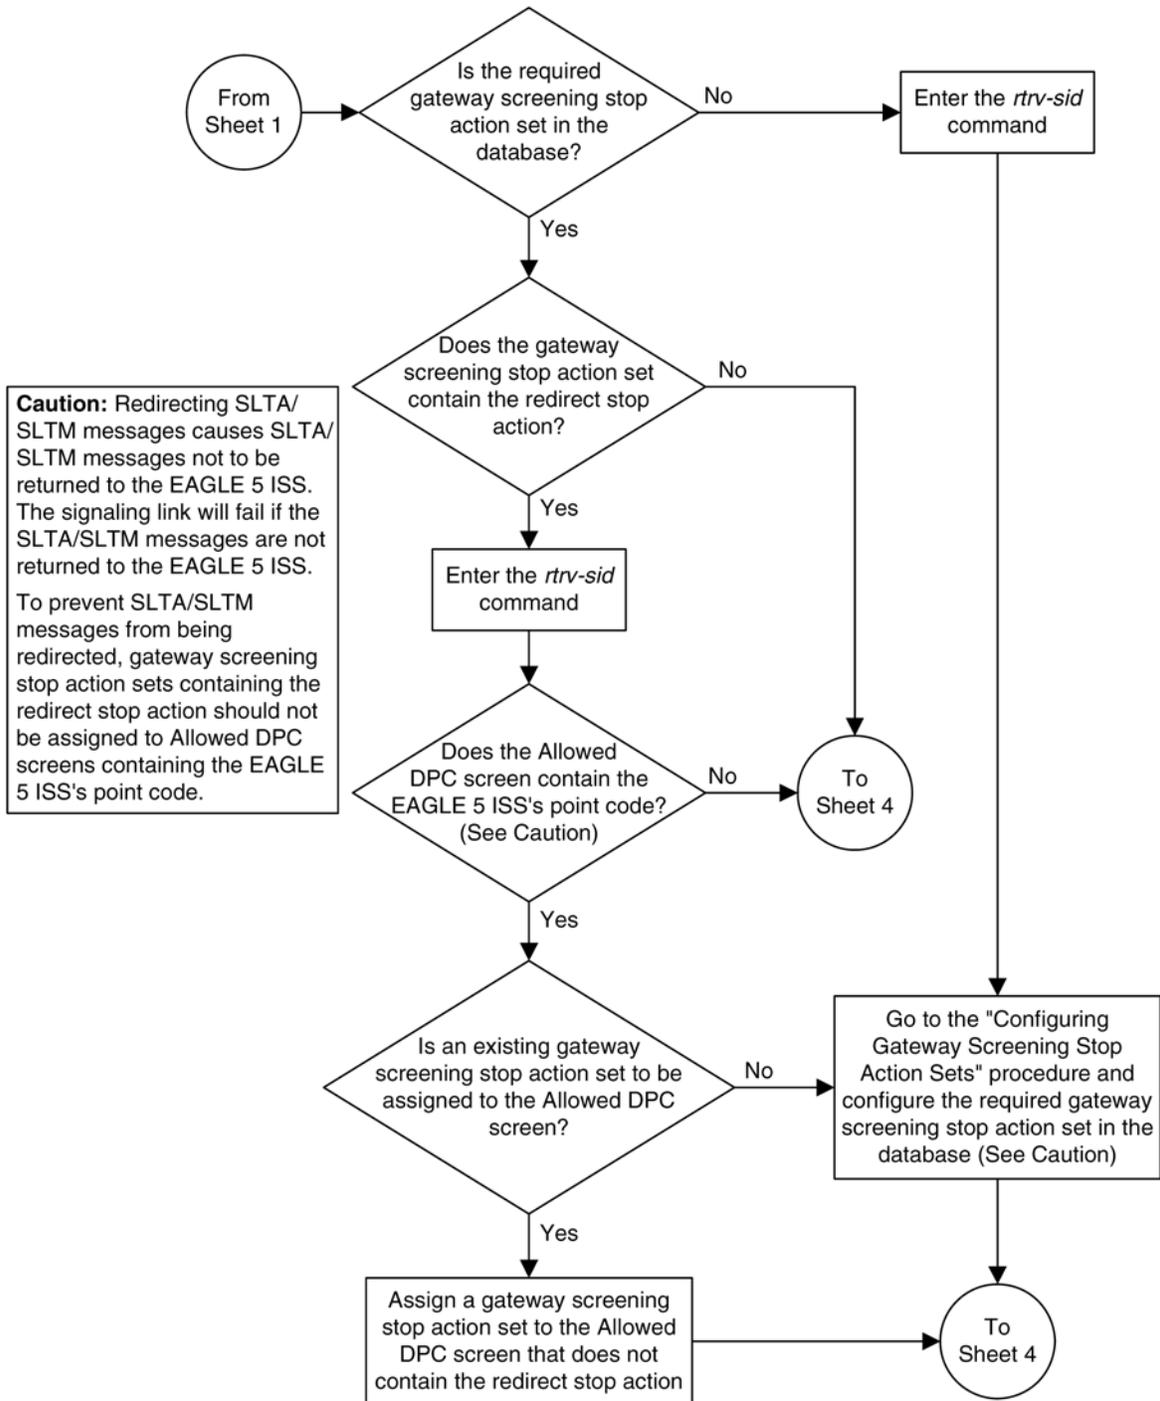

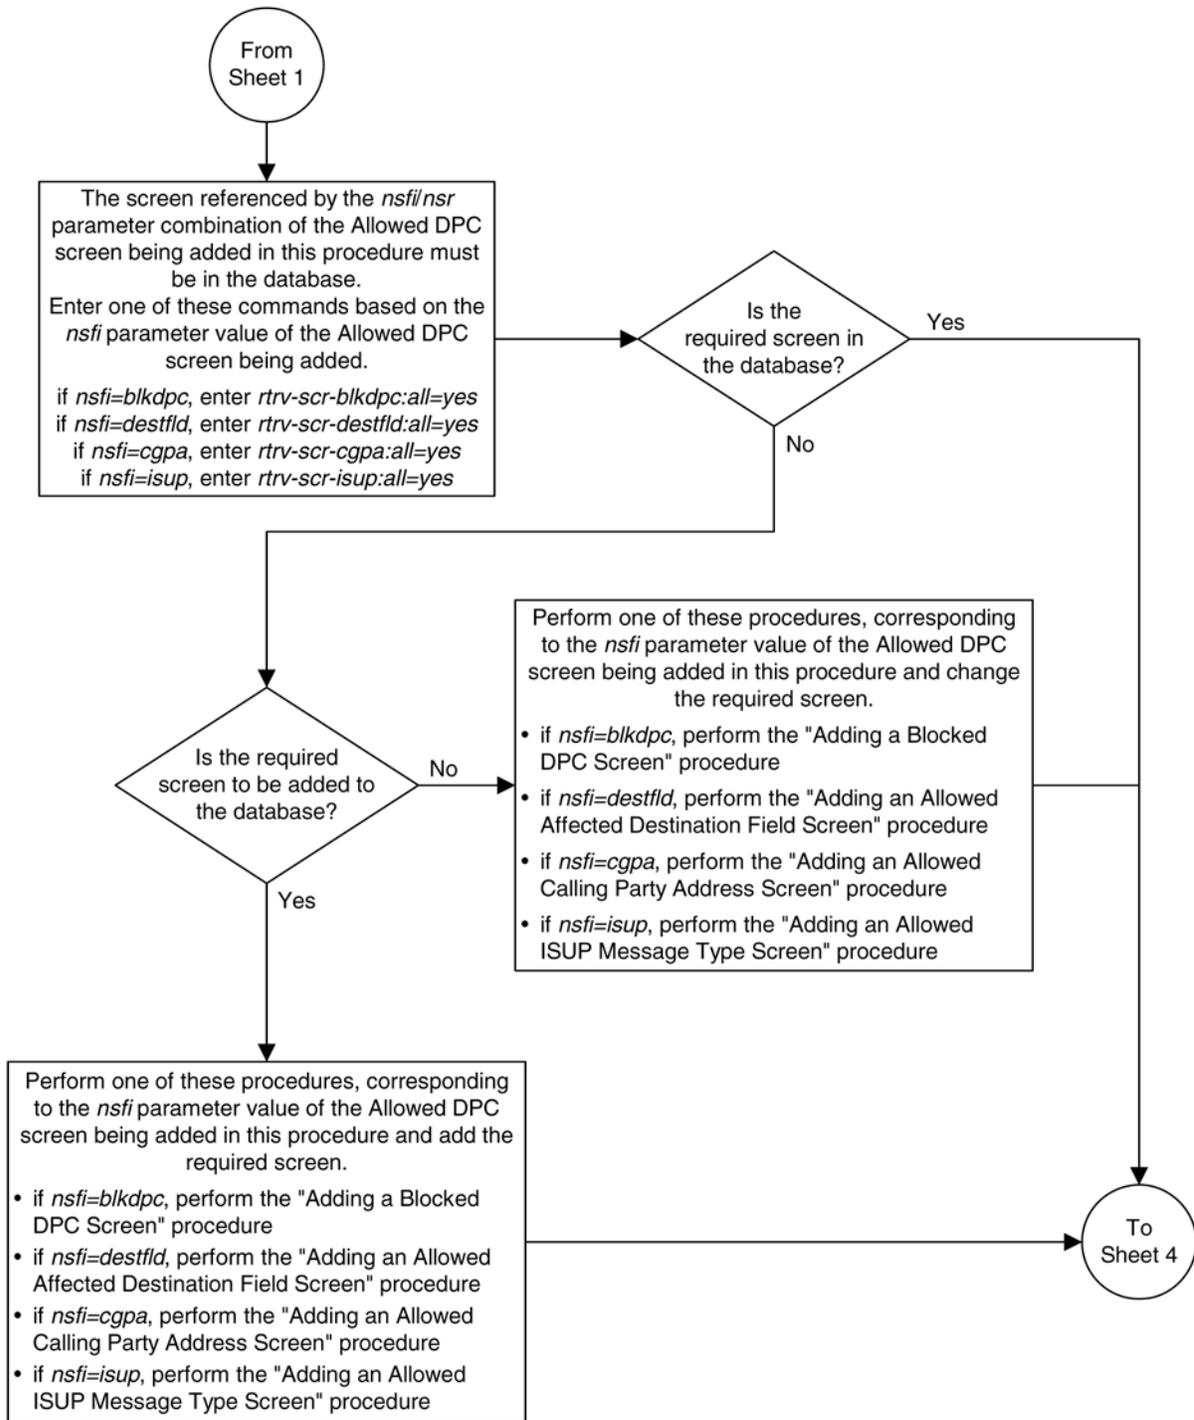

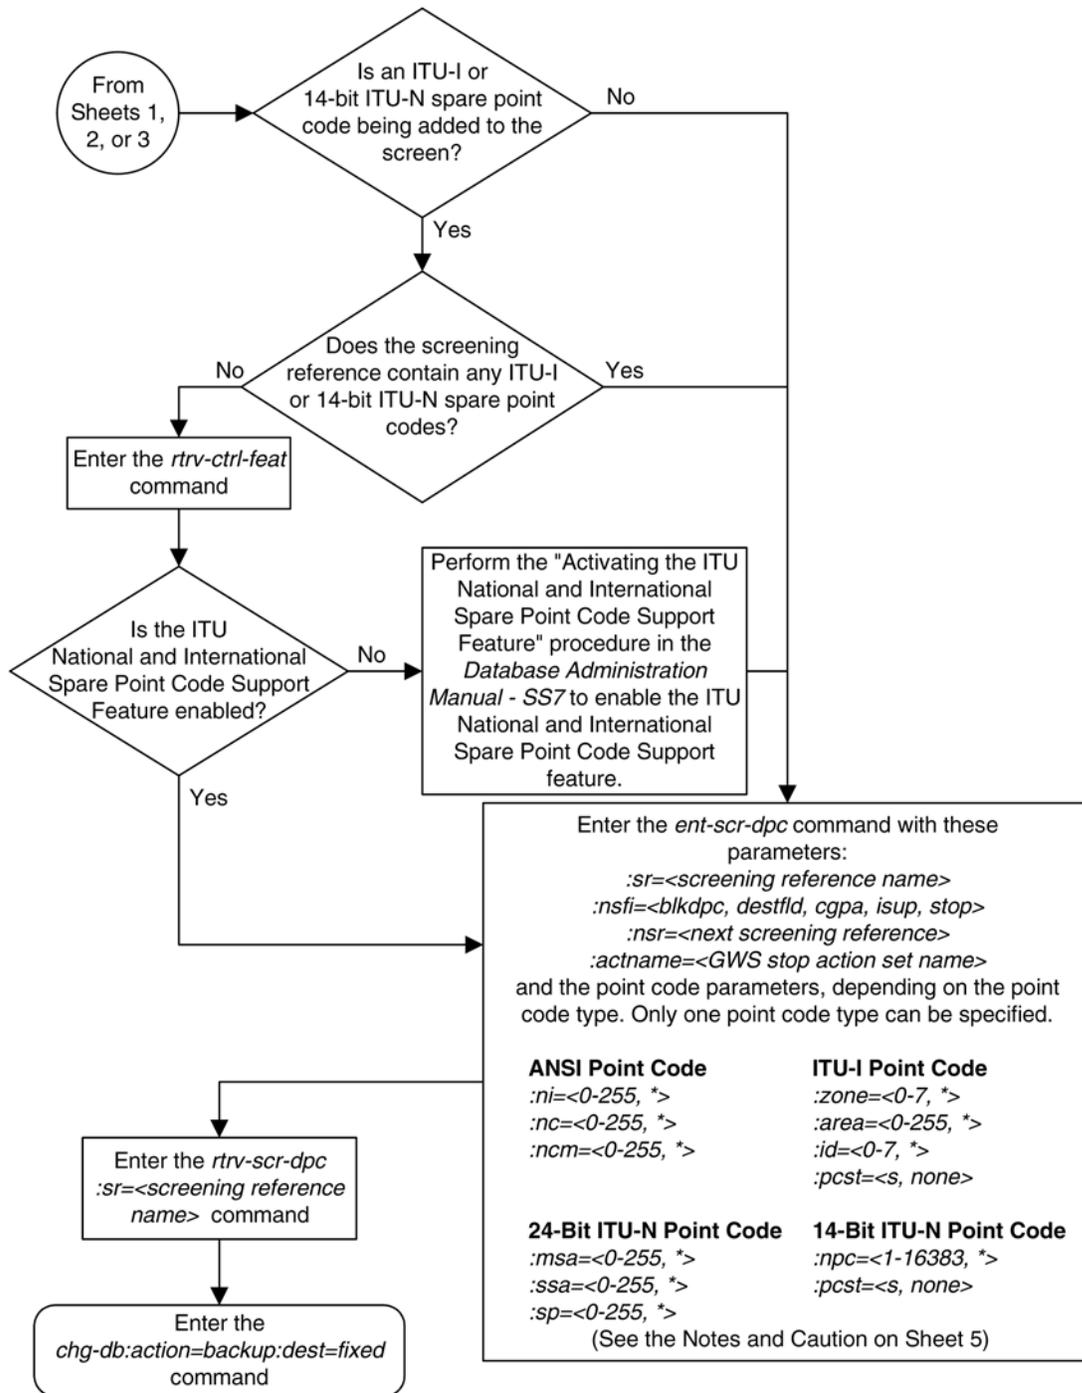

Notes:

1. A range of values can be specified for the *ni*, *nc*, or *ncm* parameters by inserting double ampersands (&&) between the parameter values defining the range. For example, to specify the range 025 to 200 for the *ni* parameter, enter 025&&200 for the *ni* parameter value.

2. The asterisk (*) specifies the entire range of values for that parameter.

For more information about specifying a range of values and about using the asterisk, see the "Gateway Screening Attributes" section in Chapter 2 and the "Specifying a Range of Values" section in this procedure.

3. The *nsr* parameter can be specified only, and must be specified, if the *nsfi* parameter value is either *blkdpc*, *destfld*, *cgpa*, or *isup*.

4. The *actname* parameter is optional and can be specified only with the *nsfi=stop* parameter. If the *actname* parameter is specified, the *actname* parameter value is one of the gateway screening stop action set names shown in the *rtrv-gws-actset* output on Sheet 1.

5. To add a non-spare point code, the *pcst* parameter does not have to be specified. If the *pcst* parameter is specified for a screen containing an ITU-I or 14-bit ITU-N non-spare point code, the value must be *none*.

6. To add a spare point code, the *pcst=s* parameter must be specified.

Caution: Redirecting SLTA/SLTM messages causes SLTA/SLTM messages not to be returned to the EAGLE 5 ISS. The signaling link will fail if the SLTA/SLTM messages are not returned to the EAGLE 5 ISS.

To prevent SLTA/SLTM messages from being redirected, gateway screening stop action sets containing the redirect stop action should not be assigned to Allowed DPC screens containing the EAGLE 5 ISS's point code.

Removing an Allowed DPC Screen

This procedure is used to remove an allowed destination point code (DPC) screen from the database using the `dlt-scr-dpc` command. The parameters used by the `dlt-scr-dpc` command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The example in this procedure removes the allowed DPC screen `gws9` from the database.

NOTE: If you using multiple-part ITU national point codes with gateway screening, see the [14-Bit ITU National Point Code Formats](#) section.

The allowed DPC screen can be referenced by one of the following screens.

- Screen Set
- Allowed OPC
- Blocked OPC
- Allowed SIO

Verifying the Gateway Screening Configuration

Enter the following commands to verify that none of these screens reference the allowed DPC screen being removed from the database.

- `rtrv-scrset:nsfi=dpc`

- `rtrv-scr-opc:nsfi=dpc`
- `rtrv-scr-blkopc:nsfi=dpc`
- `rtrv-scr-sio:nsfi=dpc`

Gateway Screening Configuration Procedures

To change the NSFI of any of these screens, perform one of these procedures.

- [Changing a Screen Set](#)
- [Changing an Allowed OPC Screen](#)
- [Changing a Blocked OPC Screen](#)
- [Changing an Allowed SIO Screen](#)

Procedure

1. Display the allowed DPC screens in the database using the `rtrv-scr-dpc` command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED DPC

SR   REF  RULES
GWS9 YES   1
IEC  YES   6
ISP2 YES   1
TUP1 YES   1
WRD2 YES   1
WRD4 YES   9
```

From the `rtrv-scr-dpc` output, display the allowed DPC screen you wish to remove using the `rtrv-scr-dpc` command with the screening reference name. For this example, enter this command.

```
rtrv-scr-dpc:sr=gws9
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED DPC
SR   NI      NC      NCM      NSFI      NSR/ACT
GWS9 003      003      003      BLKDPC    GW12
```

2. Enter the commands in the [Verifying the Gateway Screening Configuration](#) section to verify that the screen being removed is not referenced by other screens in the database.

If the screen being removed is referenced by other screens, perform the procedures shown in the [Gateway Screening Configuration Procedures](#) section to change the NSFI of those screens to reference other screens or change the NSFI of these screens to STOP.

3. Remove the allowed DPC screen from the database using the `dlt-scr-dpc` command with the screening reference name shown in the `rtrv-scr-dpc` output in step 1 and with the point code parameter values (`ni`, `nc`, `ncm`, or `zone`, `area`, `id`, or `npc`, or `msa`, `ssa`, `sp`) of the screen being removed from the database.

The values for these parameters must be entered exactly as shown in the `rtrv-scr-dpc` output.

To remove an entry containing either an ITU-I or a 14-bit ITU-N spare point code, the `pcst=s` parameter must be specified with the `dlt-scr-dpc` command.

To remove an entry containing either an ITU-I or a 14-bit ITU-N non-spare point code, the **pcst** parameter does not have to be specified with the **dlt-scr-dpc** command. If the **pcst** parameter is specified, the value must be **none**.

For this example, enter this command.

```
dlt-scr-dpc:sr=gws9:ni=003:nc=003:ncm=003
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
DLT-SCR-DPC: SCREEN SET AFFECTED - GWS9 0% FULL
DLT-SCR-DPC: MASP A - COMPLTD
```

4. Verify the changes using the **rtrv-scr-dpc** command with the screening reference name used in step 3.

For this example, enter this command.

```
rtrv-scr-dpc:sr=gws9
```

The following is an example of the possible output.

```
E2573 Cmd Rej: SR or NSR does not reference an existing SR
```


This message shows that the specified screening reference name is not in the database and the action of the **dlt-scr-dpc** command in step 3 was successful. If the specified screening reference name contained more than one entry when the **dlt-scr-dpc** command was executed in step 3, the **rtrv-scr-dpc:sr=** command output would show the remaining entries in the screening reference instead of error message E2573.

5. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 9-3. Removing an Allowed DPC Screen

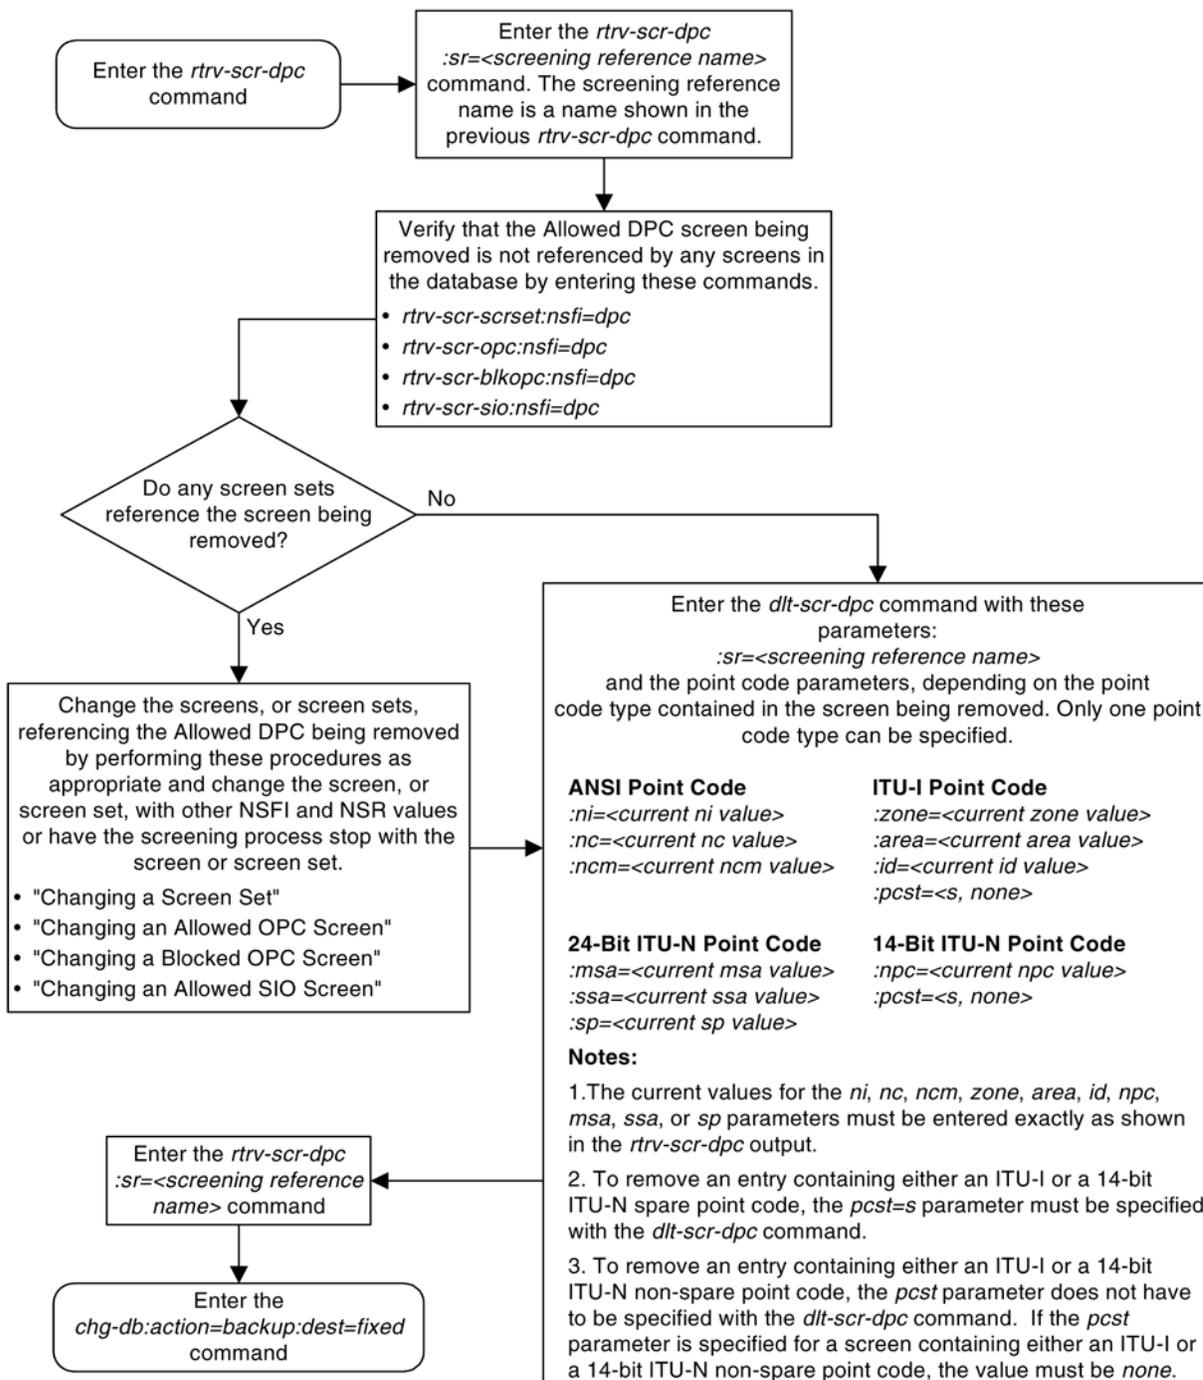

Changing an Allowed DPC Screen

This procedure is used to change the attributes of an allowed destination point code (DPC) screen in the database using the **chg-scr-dpc** command. The parameters used by the **chg-scr-dpc** command are shown in the

[Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The example in this procedure change point code in the allowed DPC screen **gws9** to 009-009-009 and change the **nsfi** to **stop**.

NOTE: If you using multiple-part ITU national point codes with gateway screening, see the [14-Bit ITU National Point Code Formats](#) section.

The allowed DPC screen can reference one of the following screens.

- Blocked DPC
- Allowed Affected Destination Field
- Allowed CGPA
- Allowed ISUP Message Type

Verifying the Gateway Screening Configuration

Enter the following commands to verify that these screens are in the database.

- **rtrv-scr-blkdpc:all=yes**
- **rtrv-scr-destfld:all=yes**
- **rtrv-scr-cgpa:all=yes**
- **rtrv-scr-isup:all=yes**

Gateway Screening Configuration Procedures

If the desired screen is not in the database, perform one of these procedures to add the desired screen to the database or change an existing screen in the database.

- [Adding a Blocked DPC Screen](#)
- [Adding an Allowed Affected Destination Field Screen](#)
- [Adding an Allowed Calling Party Address Screen](#)
- [Adding an Allowed ISUP Message Type Screen](#)
- [Changing a Blocked DPC Screen](#)
- [Changing an Allowed Affected Destination Field Screen](#)
- [Changing an Allowed Calling Party Address Screen](#)
- [Changing an Allowed ISUP Message Type Screen](#)

Specifying a Range of Values

A range of values can be specified for the point code parameters **ni**, **nc**, or **ncm**.

If a range of values is specified for any of these parameters, and the value of the other parameters match existing values for the screening reference name, the range of values for the point code parameter cannot include any values for that parameter that are currently provisioned for the screening reference name.

For example, screening reference name **scr1** contains these entries:

SR	NI	NC	NCM	NSFI	NSR/ACT
SCR1	240	001	010	CGPA	-----
SCR1	241	010	020	STOP	-----

Another entry for screening reference **scr1** with the **ni** value of 240 and the **nc** value of 001 cannot be specified if the range of values for the **ncm** parameter includes the value 010.

The ANSI point code parameter values can be specified as a single value, a range of values, or with an asterisk (*). The asterisk specifies all possible values for the **ni**, **nc**, and **ncm** parameters. [Table 9-5](#) shows the valid combinations of these parameter values.

Table 9-5. Valid Value Combinations for ANSI Point Code Parameters

NI	NC	NCM
Single Value	Single Value	Single Value
Single Value	Single Value	Range of Values
Single Value	Single Value	Asterisk
Single Value	Range of Values	Asterisk
Single Value	Asterisk	Asterisk
Range of Values	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

A range of values can also be specified for an ITU-I or 24-bit ITU-N point code parameter using a combination of asterisks (*) and single values for the point code parameters. [Table 9-6](#) shows the valid combinations of the ITU-I parameter values. [Table 9-7](#) shows the valid combinations of the 24-bit ITU-N parameter values.

Table 9-6. Valid Value Combinations for ITU-I Point Code Parameters

ZONE	AREA	ID
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Table 9-7. Valid Value Combinations for 24-Bit ITU-N Point Code Parameters

MSA	SSA	SP
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Procedure

1. Display the allowed DPC screens in the database using the **rtrv-scr-dpc** command.

The following is an example of the possible output.

```
r1ghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED DPC
```

SR	REF	RULES
GWS9	YES	1
IEC	YES	6
ISP2	YES	1
TUP1	YES	1
WRD2	YES	1
WRD4	YES	9

From the **rtrv-scr-dpc** output, display the allowed DPC screen you wish to remove using the **rtrv-scr-dpc** command with the screening reference name. For this example, enter this command.

```
rtrv-scr-dpc:sr=gws9
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED DPC
SR  NI      NC      NCM      NSFI      NSR/ACT
GWS9 003      003      003      BLKDPC    GW12
```

If a gateway screening stop action set is to be assigned to the allowed DPC screen being changed in the database, go to step 2.

Step 2 verifies the gateway screening stop action set names in the database. The gateway screening stop action set names are assigned only if the NSFI of the screen being changed in this procedure is STOP. If the NSFI of the screen will be changed to STOP, but a gateway screening stop action set name will not be assigned to the screen, skip steps 2, 3, and 4, and go to step 5. If the NSFI of the screen will not be STOP, skip step 2 and 3, and go to step 4.

2. Display the gateway screening stop action sets in the database with the **rtrv-gws-actset** command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
ACT ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT
ID  NAME  1    2    3    4    5    6    7    8    9    10
--  ---  ---  ---  ---  ---  ---  ---  ---  ---  ---  ---
1   copy  copy
2   rdct  rdct
3   cr    copy rdct
4   cncf  cncf
5   cpcnfc copy cnfc
6   cncfrd cnfc rdct
7   cpcfrc copy cnfc rdct
```

GWS action set table is (7 of 16) 44% full

If the required gateway screening stop action set is not in the database, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure to configure the required gateway screening stop action set.

NOTE: If the gateway screening stop action set being assigned to the Allowed DPC screen does not contain the redirect stop action, skip step 3 and go to step 4.

3. Verify the EAGLE 5 ISS's point code by entering the **rtrv-sid** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-10 11:43:04 GMT EAGLE5 36.0.0
PCA          PCI          PCN          CLLI          PCTYPE
100-100-100  3-75-7        7-9-8-1     rlghncxa03w  OTHER

CPCA
002-002-002  002-002-003  002-002-004  002-002-005
002-002-006  002-002-007  002-002-008  002-002-009
004-002-001  004-003-003  050-060-070
```

CPCA (LNP)			
005-005-002	005-005-004	005-005-005	006-006-006
CPCI			
1-002-1	1-002-2	1-002-3	1-002-4
2-001-1	7-222-7		
CPCN			
2-0-10-3	2-0-11-0	2-0-11-2	2-0-12-1
2-2-3-3	2-2-4-0	10-14-10-1	



CAUTION: Redirecting SLTA/SLTM messages prevents SLTA/SLTM messages from being returned to the EAGLE 5 ISS. The signaling link carrying these messages will fail if these messages are not returned to the EAGLE 5 ISS. To prevent SLTA/SLTM messages from being redirected, gateway screening stop action sets containing the redirect stop action should not be assigned to Allowed DPC screens containing the EAGLE 5 ISS's point code.

NOTE: If the NSFI of the screen being changed in this procedure will be STOP, or if the NSFI of the screen is not being changed, skip step 4 and go to step 5.

4. Enter the commands in the [Verifying the Gateway Screening Configuration](#) section to verify that the screen that will be specified by the NSFI/NSR parameter combination in step 6 is in the database.

If the desired screen is not in the database, perform one of the procedures shown in the [Gateway Screening Configuration Procedures](#) section to add the desired screen to the database or change an existing screen in the database.

NOTE: If any of these conditions apply to this procedure, skip step 5 and go to step 6:

- The point code in the screen is not being changed.
- The screen being changed contains either an ANSI or 24-bit ITU-N point code.
- The ITU-I or 14-bit ITU-N non-spare point code in the screen is not being changed to an ITU-I or 14-bit ITU-N spare point code.
- The point code in the screen is an ITU-I or 14-bit ITU-N spare point code or the screening reference contains other screens with ITU-I or 14-bit ITU-N spare point codes.

5. Display the status of the ITU National and International Spare Point Code Support feature by entering the **rtrv-ctrl-feat** command with the ITU National and International Spare Point Code Support feature part number.

Enter this command.

```
rtrv-ctrl-feat:partnum=893013601
```

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
The following features have been permanently enabled:
```

Feature Name	Partnum	Status	Quantity
Spare Point Code Support	893013601	on	----

The following features have been temporarily enabled:

Feature Name	Partnum	Status	Quantity	Trial Period Left
Zero entries found.				

The following features have expired temporary keys:

Feature Name	Partnum
Zero entries found.	

If the ITU National and International Spare Point Code Support feature is enabled, go to step 6.

If the ITU National and International Spare Point Code Support feature is not enabled, perform the “Activating the ITU National and International Spare Point Code Support Feature” procedure in the *Database Administration Manual - SS7* to enable the ITU National and International Spare Point Code Support feature as required. After the feature has been enabled, go to step 6.

6. Change the attributes of an allowed DPC screen using the **chg-scr-dpc** command.

If a gateway screening stop action is to be assigned to the allowed DPC screen being changed, enter the **chg-scr-dpc** command with the **nsfi=stop** parameter and the **actname** parameter with the name of a gateway screening stop action set shown in the output of the **rtrv-gws-actset** command executed in step 2.



CAUTION: Redirecting SLTA/SLTM messages prevents SLTA/SLTM messages from being returned to the EAGLE 5 ISS. The signaling link carrying these messages will fail if these messages are not returned to the EAGLE 5 ISS. To prevent SLTA/SLTM messages from being redirected, gateway screening stop action sets containing the redirect stop action should not be assigned to Allowed DPC screens containing the EAGLE 5 ISS’s point code, shown in step 3.

The current values for the **ni**, **nc**, **ncm**, **zone**, **area**, **id**, **npc**, **msa**, **ssa**, and **sp** parameters must be entered exactly as shown in the **rtrv-scr-dpc** output in step 1.

The following list contains the values for the **nni**, **nnc**, **nncm**, **nzone**, **narea**, **nid**, **nnpc**, **nmsa**, **nssa**, and **nsp** parameters:

- **nni** - 0-255 or an asterisk (*)
- **nnc** - 0-255 or an asterisk (*)
- **nncm** - 0-255 or an asterisk (*)
- **nzone** - 0-7 or an asterisk (*)
- **narea** - 0-255 or an asterisk (*)
- **nid** - 0-7 or an asterisk (*)
- **nnpc** - 1 - 16383 or an asterisk (*)
- **nmsa** - 0-255 or an asterisk (*)
- **nssa** - 0-255 or an asterisk (*)
- **nsp** - 0-255 or an asterisk (*)

A range of values can be specified for the **nni**, **nnc**, and **nncm** parameters. See the [“Specifying a Range of Values”](#) section for more information on how the asterisk and a range of values are used for the **nni**, **nnc**, and **nncm** parameters.

To change an ITU-I or 14-bit ITU-N spare point code to a non-spare point code, both the **pcst=s** and **npcst=none** parameters must be specified with the **chg-scr-dpc** command.

To change an ITU-I or 14-bit ITU-N non-spare point code to a spare point code, the **npcst=s** parameter must be specified with the **chg-scr-dpc** command. The **pcst** parameter does not have to be specified.

If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N spare point code, the **pcst=s** parameter must be specified with the **chg-scr-dpc** command.

If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N non-spare point code, the **pcst** parameter does not have to be specified with the **chg-scr-dpc** command. If the **pcst** parameter is specified for a screen containing either an ITU-I or 14-bit ITU-N non-spare point code, the **pcst** parameter value must be **none**.

For this example, enter this command.

```
chg-scr-  
dpc:sr=gws9:ni=003:nc=003:ncm=003:nni=009:nnc=009 :nncm=009:nsfi=stop
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0  
CHG-SCR-DPC: SCREEN SET AFFECTED - GWS9 1% FULL  
CHG-SCR-DPC: MASP A - COMPLTD
```

7. Verify the changes using the **rtrv-scr-dpc** command with the screening reference name used in step 6.

For this example, enter this command.

```
rtrv-scr-dpc:sr=gws9
```

The following is an example of the possible output.


```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0  
SCREEN = ALLOWED DPC  
SR   NI       NC       NCM       NSFI      NSR/ACT  
GWS9 009       009       009       STOP      -----
```


8. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.


The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.


```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.  
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.  
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.  
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 9-4. Changing an Allowed DPC Screen

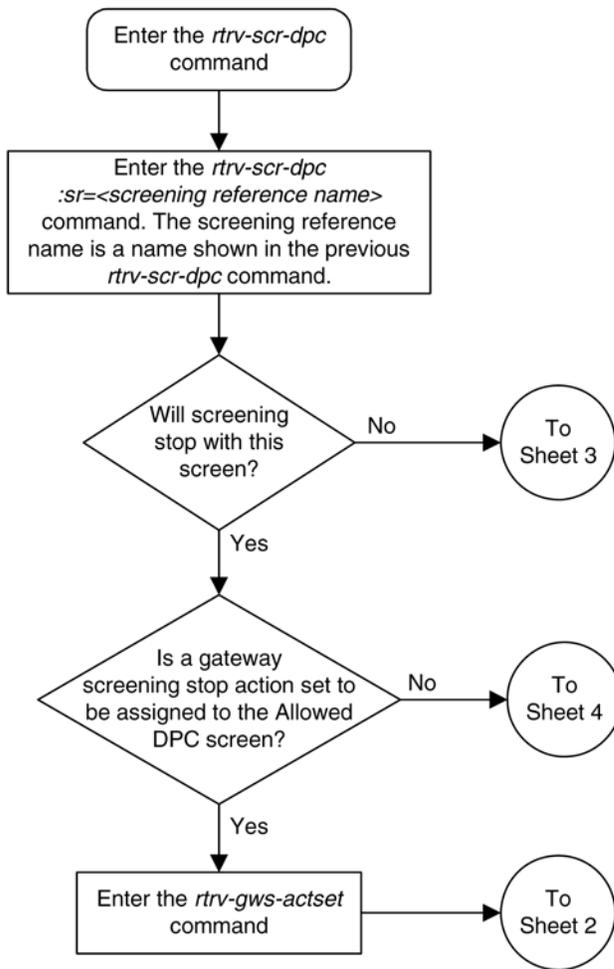

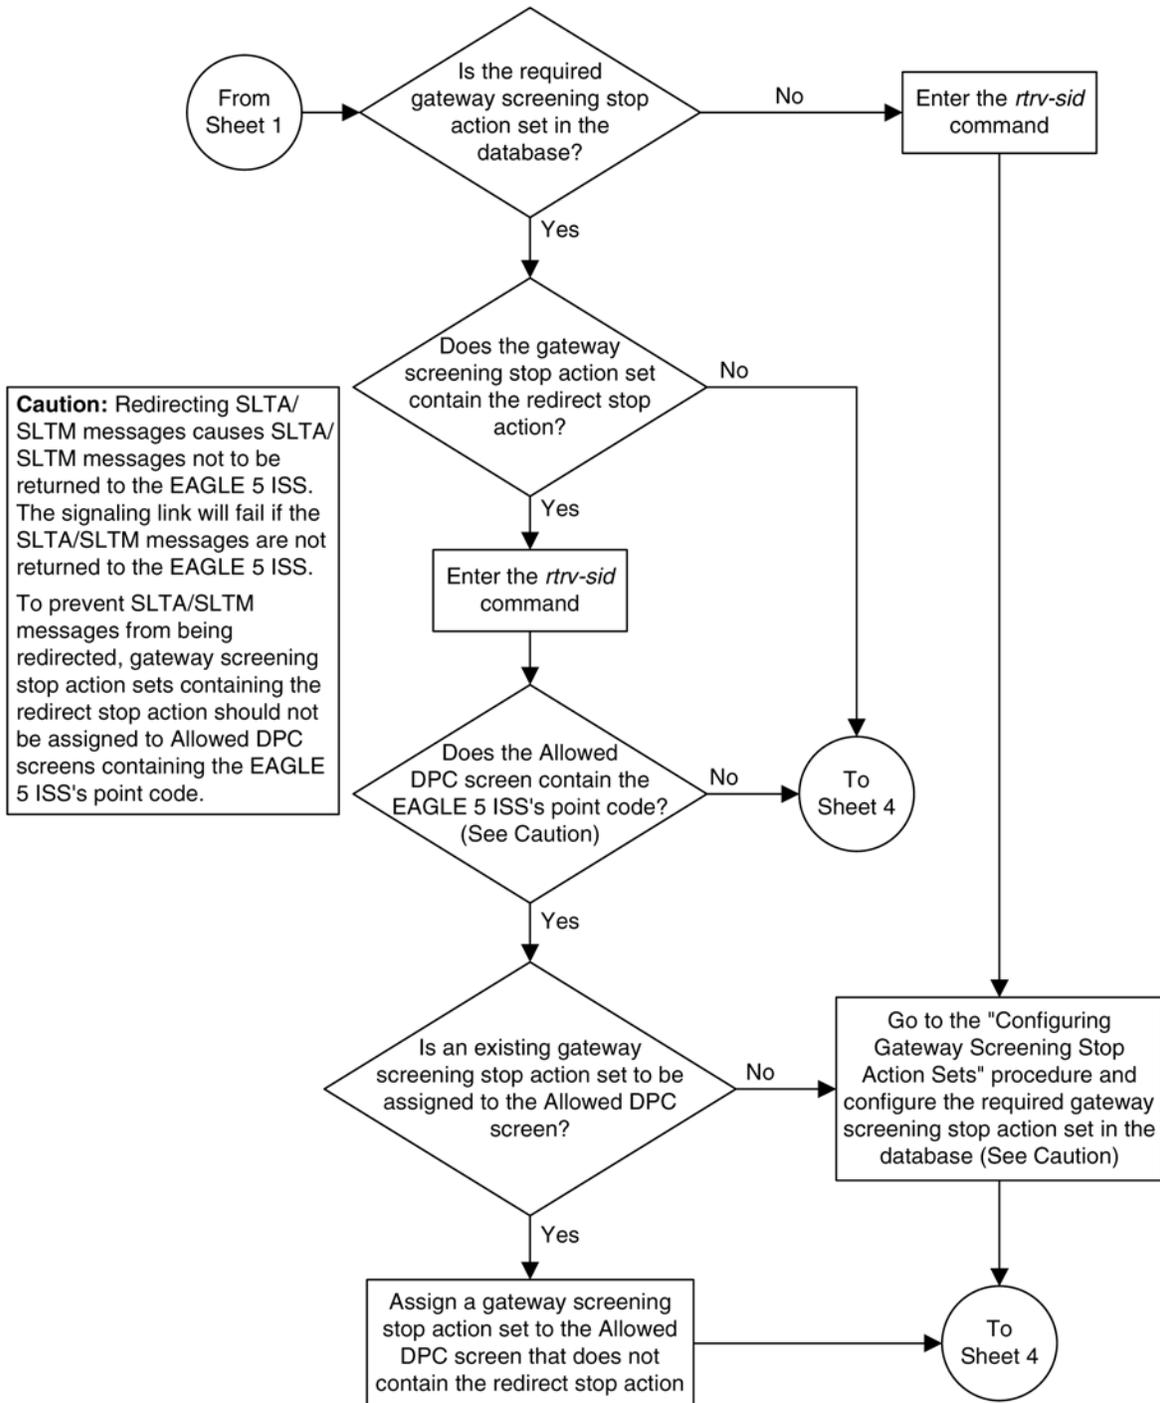

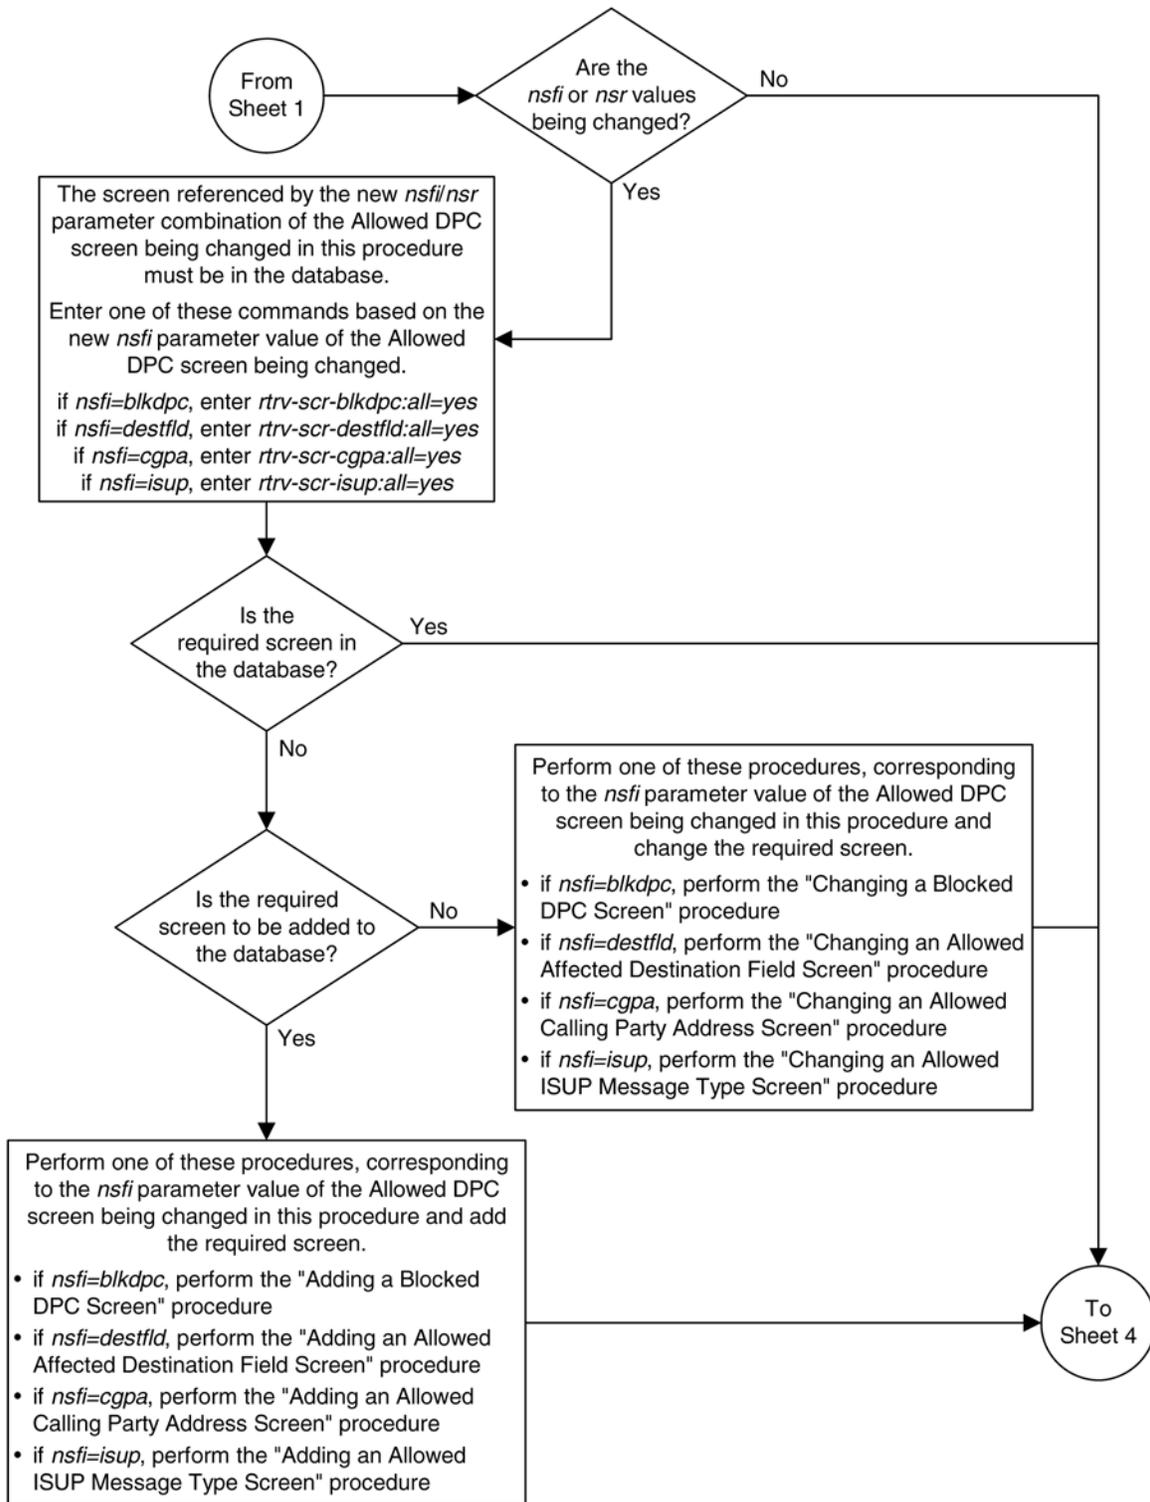

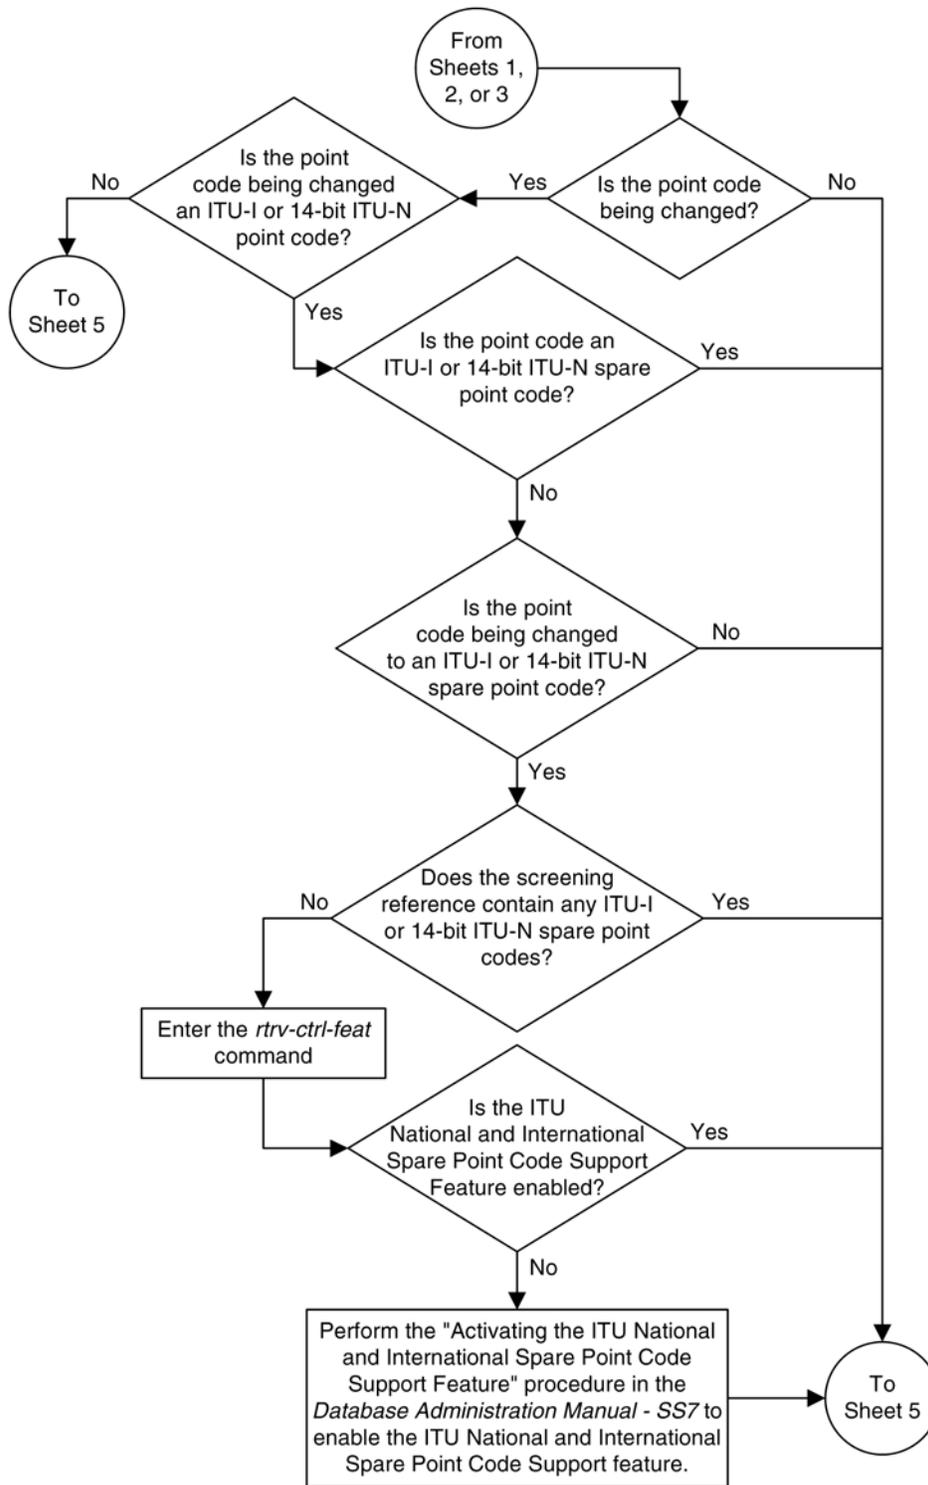



Enter the *chg-scr-dpc* command with this mandatory parameter:
:sr=<screening reference name>
 and the point code parameters, depending on the point code type contained in the screen being changed. Only one point code type can be specified.

ANSI Point Code	ITU-I Point Code	14-Bit ITU-N Point Code	24-Bit ITU-N Point Code
<i>:ni=<current ni value></i>	<i>:zone=<current zone value></i>	<i>:npc=<current npc value></i>	<i>:msa=<current msa value></i>
<i>:nc=<current nc value></i>	<i>:area=<current area value></i>	<i>:pcst=<s, none></i>	<i>:ssa=<current ssa value></i>
<i>:ncm=<current ncm value></i>	<i>:id=<current id value></i>		<i>:sp=<current sp value></i>
	<i>:pcst=<s, none></i>		

At least one of these optional parameters must be specified with the *chg-scr-dpc* command.

:nsfi=<blkdpc, destfld, cgpa, isup, stop>
:nsr=<next screening reference>
:actname=<GWS stop action set name>

If the new point code code parameters are specified, they must be of the same type as the current point code values specified in the *chg-scr-dpc* command.

ANSI Point Code	ITU-I Point Code	14-Bit ITU-N Point Code	24-Bit ITU-N Point Code
<i>:nni=<0-255, *></i>	<i>:nzone=<0-7, *></i>	<i>:nnpc=<1-16383, *></i>	<i>:nmsa=<0-255, *></i>
<i>:nnc=<0-255, *></i>	<i>:narea=<0-255, *></i>	<i>:npcst=<s, none></i>	<i>:nssa=<0-255, *></i>
<i>:nncm=<0-255, *></i>	<i>:nid=<0-7, *></i>		<i>:nsp=<0-255, *></i>
	<i>:npcst=<s, none></i>		

(See the Notes and Caution on Sheet 6)

Enter the *rtrv-scr-dpc*
:sr=<screening reference name> command

Enter the
chg-db:action=backup:dest=fixed
 command

Notes:

1. A range of values can be specified for the *ni*, *nc*, or *ncm* parameters by inserting double ampersands (&&) between the parameter values defining the range. For example, to specify the range 025 to 200 for the *ni* parameter, enter 025&&200 for the *ni* parameter value.

2. The asterisk (*) specifies the entire range of values for that parameter.

For more information about specifying a range of values and about using the asterisk, see the "Gateway Screening Attributes" section in Chapter 2 and the "Specifying a Range of Values" section in this procedure.

3. The *nsr* parameter can be specified, and must be specified, if the *nsfi* parameter value is either *blkdpc*, *destfld*, *cgpa*, or *isup*.

4. The *actname* parameter is optional and can be specified only with the *nsfi=stop* parameter. If the *actname* parameter is specified, the *actname* parameter value is one of the gateway screening stop action set names shown in the *rtrv-gws-actset* output on Sheet 1.

5. To change an ITU-I or 14-bit ITU-N spare point code to a non-spare point code, both the *pcst=s* and *npcst=none* parameters must be specified with the *chg-scr-dpc* command.

6. To change an ITU-I or 14-bit ITU-N non-spare point code to a spare point code, the *npcst=s* parameter must be specified with the *chg-scr-dpc* command. The *pcst* parameter does not have to be specified.

7. If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N spare point code, the *pcst=s* parameter must be specified with the *chg-scr-dpc* command.

8. If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N non-spare point code, the *pcst* parameter does not have to be specified with the *chg-scr-dpc* command. If the *pcst* parameter is specified for a screen containing either an ITU-I or 14-bit ITU-N non-spare point code, the *pcst* parameter value must be *none*.

Caution: Redirecting SLTA/SLTM messages causes SLTA/SLTM messages not to be returned to the EAGLE 5 ISS. The signaling link will fail if the SLTA/STM messages are not returned to the EAGLE 5 ISS.

To prevent SLTA/SLTM messages from being redirected, gateway screening stop action sets containing redirect stop action should not be assigned to Allowed DPC screens containing the EAGLE 5 ISS's point code.

Allowed Signaling Information Octet (SIO) Screen Configuration

Introduction	10-1
Adding an Allowed SIO Screen	10-8
Removing an Allowed SIO Screen	10-17
Changing an Allowed SIO Screen	10-20

Introduction

The allowed signaling information octet (SIO) screen identifies the type of MSUs (ISUP, TCAP, etc.) that are allowed into the network. The gray shaded areas in [Figure 10-1](#) shows the fields of the SS7 message that are checked by the allowed SIO screening function. If a match is found, the **nsfi** is examined to determine the next step in the screening process. If the **nsfi** is equal to **stop**, the message is processed and no further screening takes place.

If the **nsfi** is equal to **stop**, and the **copy** gateway screening stop action is specified, the message is processed and a copy of the message is sent by the STPLAN feature to an external application.

If the **nsfi** is equal to **stop**, and the **rdct** (redirect) gateway screening stop action is specified, the message is diverted from the original destination and sent to another destination with the Database Transport Access feature, specified by global title translation, for further processing.

If the Calling Name Conversion Facility (CNCf) feature is on, the **nsfi** is equal to **stop**, and the **cncf** gateway screening stop action is specified, the PIP parameter in the incoming ISUP IAM message is converted to the GN parameter. The GN parameter in the incoming ISUP IAM message is converted to the PIP parameter. The message is then sent to the node specified by the DPC in the routing label in the message. For more information on the Calling Name Conversion Facility feature, see [Chapter 14 Calling Name Conversion Facility \(CNCf\) Configuration](#).

If the Triggerless LNP (TLNP) feature is on, the **nsfi** is equal to **stop**, and the **tlnp** gateway screening stop action is specified, ISUP IAMs that pass gateway screening are processed either by the ISUP NP with EPAP feature (if the ISUP NP with EPAP feature is enabled and turned on) or by the Triggerless LNP feature (if the Triggerless LNP feature is turned on). The ISUP NP with EPAP feature is discussed in more detail in the *Feature Manual - G-Port*. The Triggerless LNP feature is discussed in more detail in the *LNP Feature Activation Guide*.

If the Triggerless ISUP based Number Portability (TINP) feature is enabled, the **nsfi** is equal to **stop**, and the **tinp** gateway screening stop action is specified, ISUP IAMs that pass gateway screening are intercepted by the

Triggerless ISUP based Number Portability (TINP) feature and converted to include the routing number (RN) if the call is to a ported number. The TINP feature is discussed in more detail in the *Feature Manual - G-Port*.

If the **nsfi** is equal to anything else, the next screening reference (**nsr**) is identified and the screening process continues to the next screen identified by the **nsfi** and **nsr** parameters. If no match is found, the message is discarded.

The value of the **nsfi** parameter is based on the value of the service indicator (**si**) parameter. [Table 10-1](#) shows the valid combinations of **nsfi** values and service indicator values.


Table 10-1. Valid Parameter Combinations for the Allowed SIO Screening Function


Service Indicator (SI) Values	Nest Screening Function Identifier (NSFI) Values
0	DPC, BLKDPC, DESTFLD
3	DPC, BLKDPC, CGPA, CDPA
4, 5	DPC, BLKDPC, ISUP
All other values (1, 2, 6-15)	DPC, BLKDPC


Messages containing the service indicator value 4 are TUP messages, and messages containing the service indicator value 5 are ISUP messages. Both types of messages are screened using the allowed ISUP screen. TUP messages can be screened for point codes, after the SIO screen, with the allowed and blocked DPC screens. However, if the screen set does not contain an allowed SIO screen that screens for TUP messages (messages with the service indicator value of 4), the message will be treated by the allowed ISUP message type screen as an ISUP message, even if the message contains the service indicator value of 4.


[Flowchart 10-36](#) shows the screening action of the allowed SIO screen.

Flowchart 10-1. Allowed SIO Screening Action

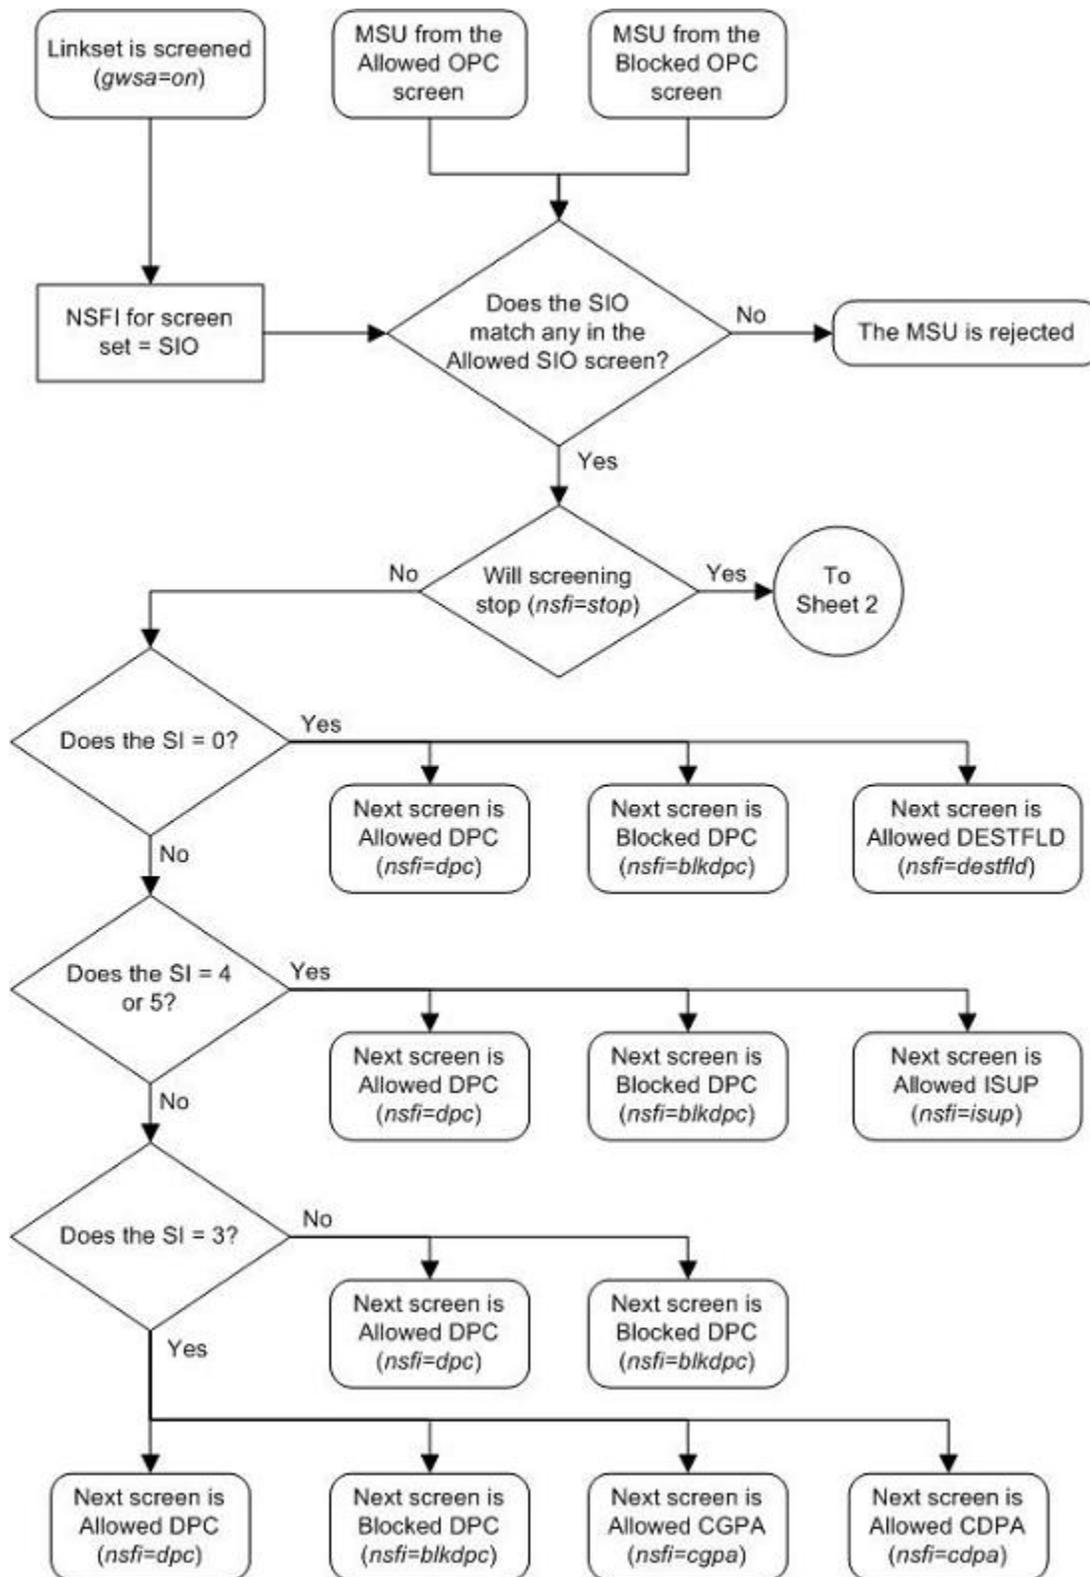

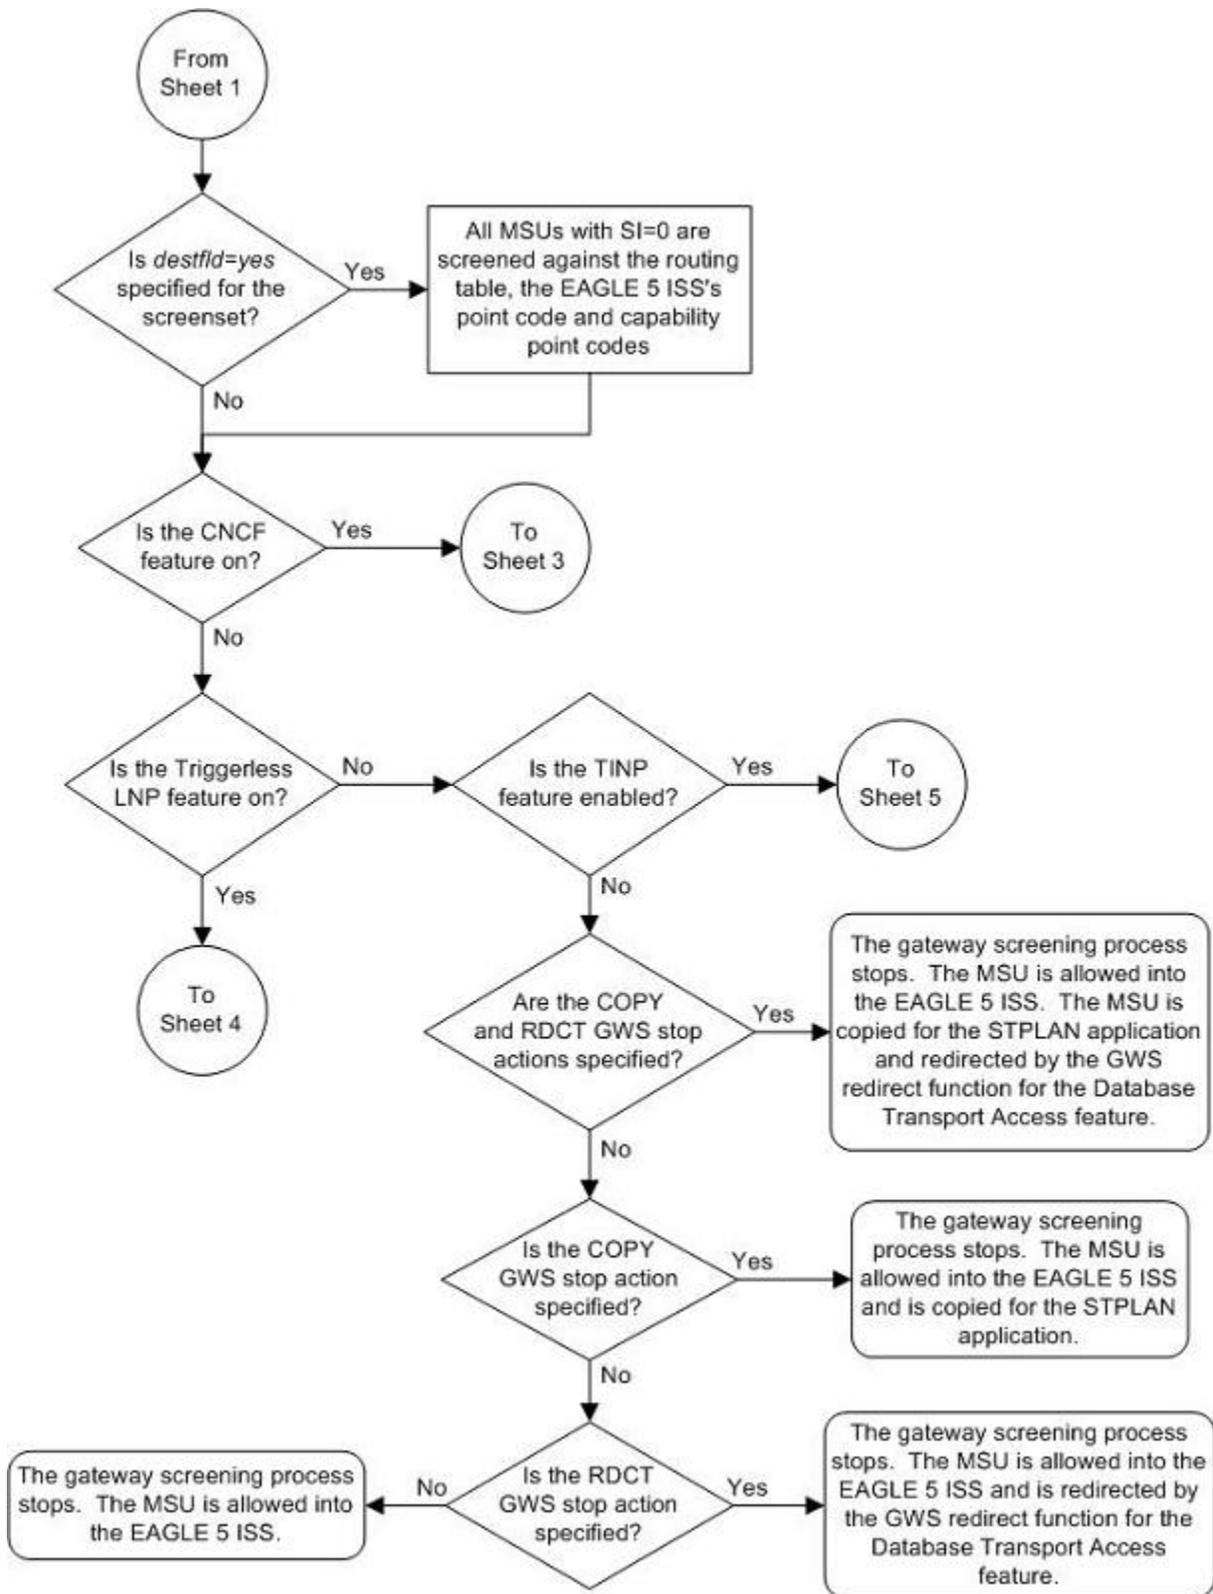

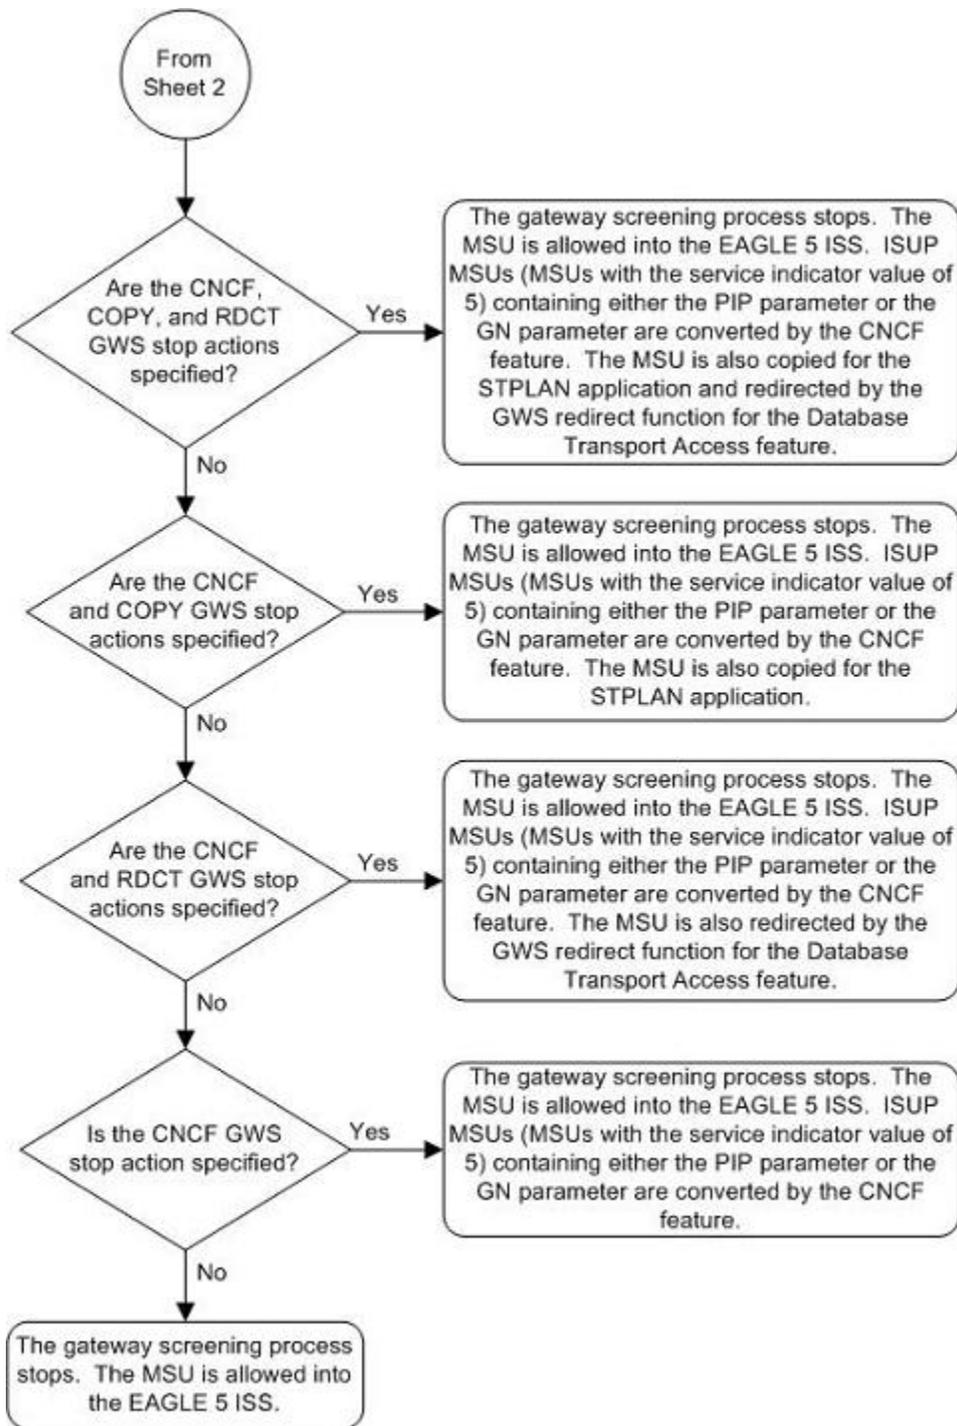

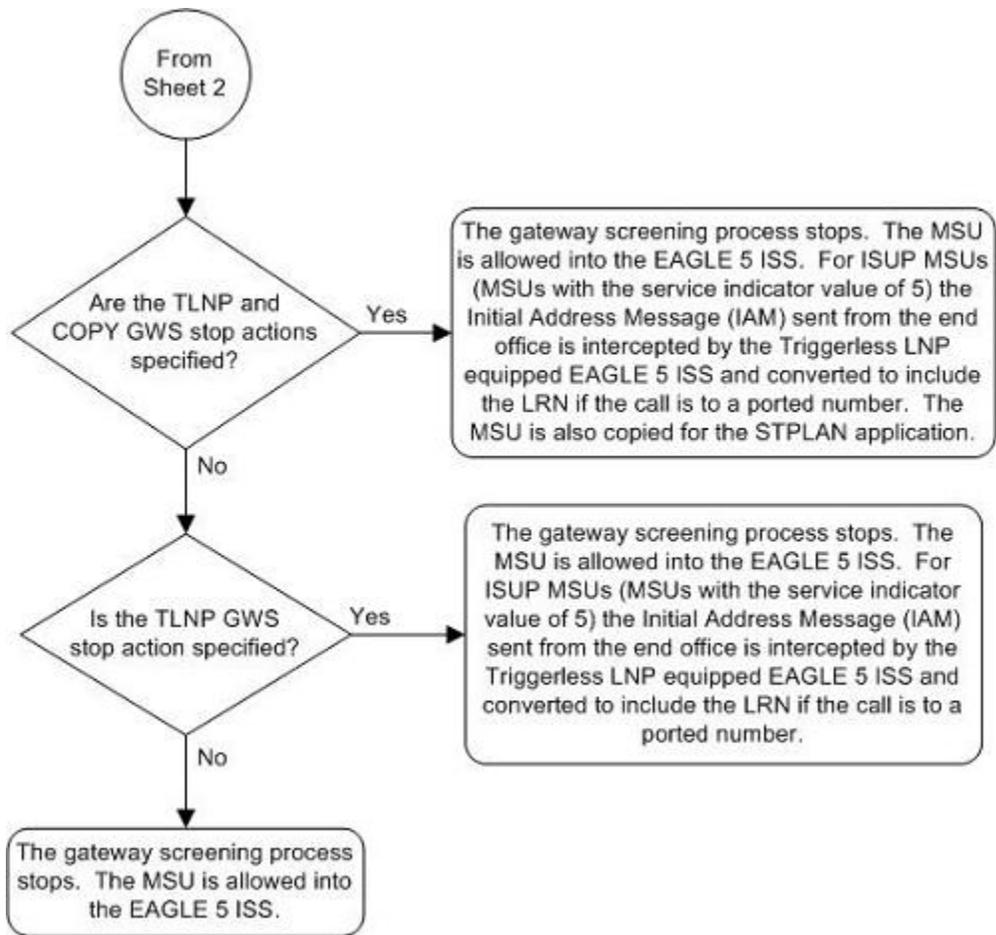

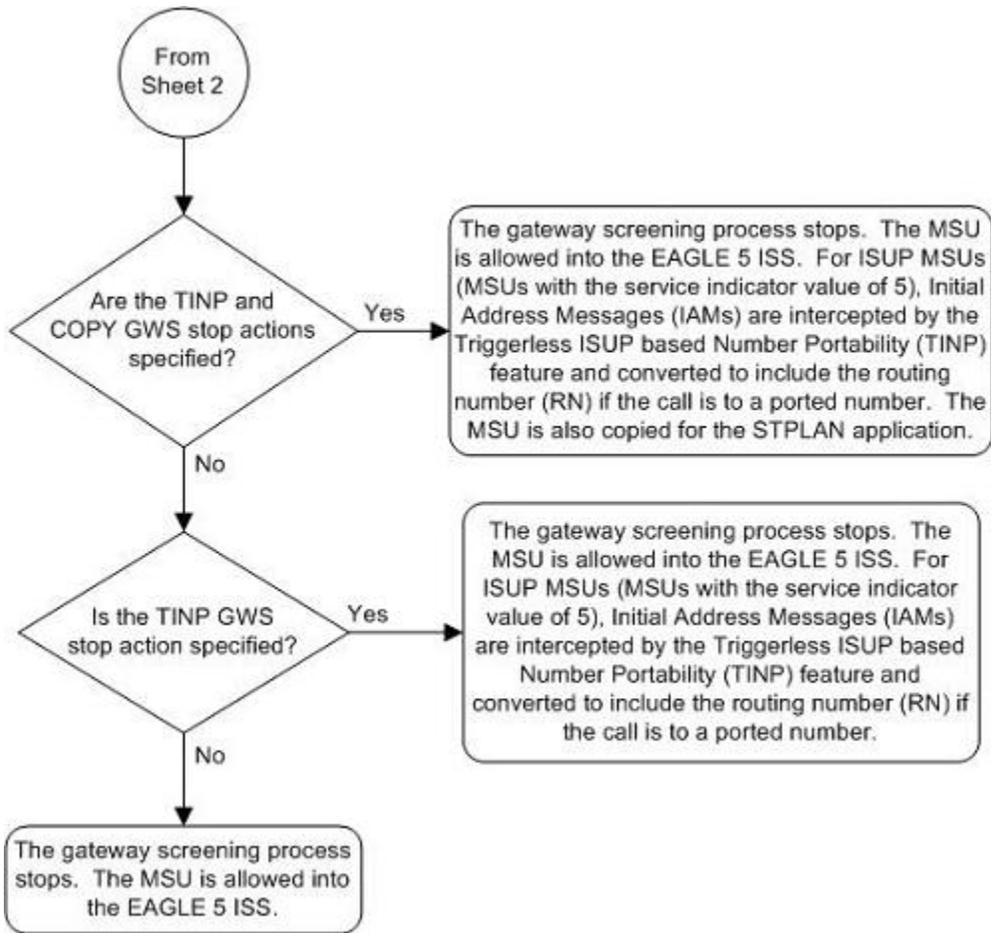


Figure 10-1. Allowed SIO Screening Function

ANSI MSU (ANSI Message Signal Unit)					
BSN FSN LI	SIO xx xx xxxx NIC PRI SI		SIF		
	Routing Label DPC OPC SLS NCM NC NI NCM NC NI xx			H1	H0

ITU-I MSU (ITU International Message Signal Unit)					
BSN FSN LI	SIO xx xx xxxx NIC PRI SI		SIF		
	Routing Label DPC OPC SLS ID AREA ZONE ID AREA ZONE xx			H1	H0

14-Bit ITU-N MSU (14-Bit ITU National Message Signal Unit)					
BSN FSN LI	SIO xx xx xxxx NIC PRI SI		SIF		
	Routing Label DPC OPC SLS NPC NPC xx			H1	H0

24-Bit ITU-N MSU (24-Bit ITU National Message Signal Unit)					
BSN FSN LI	SIO xx xx xxxx NIC PRI SI		SIF		
	Routing Label DPC OPC SLS SP SSA MSA SP SSA MSA xx			H1	H0

Adding an Allowed SIO Screen

This procedure is used to add an allowed signaling information octet (SIO) screen to the database using the **ent-scr-sio** command. The parameters used by the **ent-scr-sio** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The examples in this procedure are used to add the allowed SIO screen data shown in [Table 10-2](#) and based on the example configurations shown in [Figure 2-4](#), [Figure 2-6](#), [Figure 2-7](#), [Figure 2-8](#), and [Figure 2-9](#).

Table 10-2. Example Gateway Screening Allowed SIO Configuration Table

Screening Reference	NIC	SI	H0	H1	PRI	NSFI	NSR
fld4	2	0	4	5	3	destfld	fld5
iec	2	3	--	--	1&&3	cgpa	gw11
ls02	2	3	--	--	3	cdpa	ls03
isp1	2	5	--	--	3	isup	isp1
tup1	2	4	--	--	3	dpc	tup1
tup1	2	5	--	--	3	dpc	isp2

The allowed SIO screen can reference one of the following screens.

- Allowed DPC
- Blocked DPC
- Allowed Affected Destination Field
- Allowed ISUP Message Type
- Allowed CGPA
- Allowed CDPA

Verifying the Gateway Screening Configuration

Enter the following commands to verify that these screens are in the database.

- `rtrv-scr-dpc:all=yes`
- `rtrv-scr-blkdpc:all=yes`
- `rtrv-scr-destfld:all=yes`
- `rtrv-scr-isup:all=yes`
- `rtrv-scr-cgpa:all=yes`
- `rtrv-scr-cdpa:all=yes`

Gateway Screening Configuration Procedures

If the desired screen is not in the database, perform one of these procedures to add the desired screen to the database or change an existing screen in the database.

- [Adding an Allowed DPC Screen](#)
- [Adding a Blocked DPC Screen](#)
- [Adding an Allowed Affected Destination Field Screen](#)
- [Adding an Allowed ISUP Message Type Screen](#)
- [Adding an Allowed Calling Party Address Screen](#)
- [Adding an Allowed Called Party Address Screen](#)
- [Changing an Allowed DPC Screen](#)

- [Changing a Blocked DPC Screen](#)
- [Changing an Allowed Affected Destination Field Screen](#)
- [Changing an Allowed ISUP Message Type Screen](#)
- [Changing an Allowed Calling Party Address Screen](#)
- [Changing an Allowed Called Party Address Screen](#)

Specifying a Range of Values

A range of values can be specified for the **pri**, **h0**, and **h1** parameters. If a range of values is specified for any of these parameters and the **nic** and **si** values in the screening reference name are not changed, the range of values for the **pri**, **h0**, or **h1** parameters cannot include any values that are currently provisioned for the screening reference name.

For example, screening reference name **scr1** contains these entries:

SR	NIC	PRI	SI	H0	H1	NSFI	NSR/ACT
SCR1	2	3	1	4	5	DPC	LS03
SCR1	2	2	1	2	7	BLKDPC	LS04

Another entry for screening reference **scr1** with the same **nic** and **si** values cannot be specified if:

- The range of values for the **pri** parameter includes the values 2 or 3
- The range of values for the **h0** parameter includes the values 2 or 4
- The range of values for the **h1** parameter includes the values 5 or 7.

Specifying H0 and H1 Values

The **h0** and **h1** values must be specified if the **si** value is 0, 1, or 2. If the **si** value is 3 through 15, the **h0** and **h1** parameters cannot be specified.

The **h0** and **h1** parameters must be specified if either parameter is specified.

The H0 and H1 heading code values can be a single value, a range of values with the beginning and end of the range separated by double ampersands (for example, a range of values from 2 to 9, 2&&9), or with an asterisk (*). The asterisk specifies all possible values for the **h0** and **h1** parameters. [Table 10-3](#) shows the valid combinations of these parameter values.

Table 10-3. Valid Value Combinations for H0 and H1 Parameters

H0	H1
Single Value	Single Value
Single Value	Range of Values
Single Value	Asterisk
Range of Values	Asterisk
Asterisk	Asterisk

Procedure

1. Verify that the gateway screening feature is on, by entering the **rtrv-feat** command.

If the gateway screening feature is on, the **GWS** field is set to **on**.

NOTE: The `rtrv-feat` command output contains other fields that are not used by this procedure. If you wish to see all the fields displayed by the `rtrv-feat` command, see the `rtrv-feat` command description in the *Commands Manual*.

If the gateway screening feature is on, shown by the entry `GWS = on` in the `rtrv-feat` command output, skip step 2, and go to step 3.

- Turn the gateway screening feature on by entering this command.

```
chg-feat:gws=on
```

NOTE: Once the gateway screening feature is turned on with the `chg-feat` command, it cannot be turned off.

The gateway screening feature must be purchased before you turn this feature on with the `chg-feat` command. If you are not sure if you have purchased the gateway screening feature, contact your Tekelec Sales Representative or Account Representative.

When the `chg-feat` has successfully completed, this message should appear.

```
rlghncxa03w 06-10-28 11:43:04 GMT EAGLE5 36.0.0
CHG-FEAT: MASP A - COMPLTD
```

- Display all allowed SIO screens in the database using the `rtrv-scr-sio` command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED SIO
SR   REF  RULES
IEC  YES   5
WRD2 YES   1
WRD4 YES   9
```

If the screening reference names that you wish to add with this procedure are not shown in the `rtrv-scr-sio` command output, go to either steps 4 or 5.

Step 4 verifies the gateway screening stop action set names in the database. The gateway screening stop action set names are assigned only if the NSFI of the screen being added in this procedure is STOP. If the NSFI of the new screen will be STOP, but a gateway screening stop action set name will not be assigned to the new screen, skip steps 4 and 5 and go to step 6. If the NSFI of the new screen is not STOP, skip step 4 and go to step 5.

If these screening reference names are shown in the `rtrv-scr-sio` command output, make sure the screening data you wish to enter is not already in the database by entering the `rtrv-scr-sio` command with the screening reference name. In this example, screen `iec` will have new data added to it. For this example, enter the `rtrv-scr-sio:sr=iec` command. The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED SIO
SR   NIC  PRI  SI  H0    H1    NSFI    NSR/ACT
IEC  2     0&&3 0   0     0     BLKDPC  WDB2
IEC  2     0&&2 0   1     1     DPC     WDB3
IEC  2     0&&1 0   2     2     STOP    -----
IEC  2     0&&3 4   --    --    STOP    -----
IEC  2     0&&2 1   *     *     DPC     WDB3
```

- Display the gateway screening stop action sets in the database with the `rtrv-gws-actset` command.

This is an example of the possible output.

```

rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
ACT ACT ACT ACT ACT ACT ACT ACT ACT ACT
ID NAME 1 2 3 4 5 6 7 8 9 10
-----
1 copy copy
2 rdct rdct
3 cr copy rdct
4 cncf cncf
5 cpcncf copy cncf
6 cncfrd cncf rdct
7 cpcfcrd copy cncf rdct

```

GWS action set table is (7 of 16) 44% full

If the required gateway screening stop action set is not in the database, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure to configure the required gateway screening stop action set.

NOTE: If the NSFI of the screen being added in this procedure is STOP, skip step 5 and go to step 6.

5. Enter the commands in the [Verifying the Gateway Screening Configuration](#) section to verify that the screen that will be specified by the NSFI/NSR parameter combination in step 6 is in the database.

If the desired screen is not in the database, perform one of the procedures shown in the [Gateway Screening Configuration Procedures](#) section to add the desired screen to the database or change an existing screen in the database.

6. Add a new allowed SIO screen to the database using the `ent-scr-sio` command.

If a gateway screening stop action set is to be assigned to the new allowed SIO screen, enter the `ent-scr-sio` command with the `nsfi=stop` parameter and the `actname` parameter with the name of a gateway screening stop action set shown in the output of the `rtrv-gws-actset` command executed in step 4.



CAUTION: Redirecting SLTA/SLTM messages prevents SLTA/SLTM messages from being returned to the EAGLE 5 ISS. The signaling link carrying these messages will fail if these messages are not returned to the EAGLE 5 ISS. To prevent SLTA/SLTM messages from being redirected, gateway screening stop action sets containing the redirect stop action should not be assigned to Allowed SIO screens containing the service indicator values 1 (SI=1) or 2 (SI=2).

The following list contains the values for `nic`, `si`, `pri`, `h0` and `h1` parameters:

- `nic` – 0 - 3, or an asterisk (*)
- `si` – 0 - 15
- `pri` – 0 - 3, or an asterisk (*)
- `h0` – 0 - 15, or an asterisk (*)
- `h1` – 0 - 15, or an asterisk (*)

A range of values can be specified for the `pri`, `h0`, and `h1` parameters. See the [“Specifying a Range of Values”](#) section for more information. See the [“Specifying H0 and H1 Values”](#) section for information on how the asterisk and a range of values are used for the `h0` and `h1` parameters.

The value of the `nsfi` parameter is based on the value of the service indicator (`si`) parameter. [Table 10-1](#) shows the valid combinations of `nsfi` values and service indicator values. For this example, enter these commands.

```
ent-scr-sio:sr=fld4:nic=2:si=0:h0=4:h1=5:pri=3:nsfi=destfld :nsr=fld5
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
ENT-SCR-SIO: MASP A - COMPLTD
```

```
ent-scr-sio:sr=iec:nic=2:si=3:pri=1&&3:nsfi=cgpa:nsr=gw11
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:29:30 GMT EAGLE5 36.0.0
ENT-SCR-SIO: MASP A - COMPLTD
```

```
ent-scr-sio:sr=ls02:nic=2:si=3:pri=3:nsfi=cdpa:nsr=ls03
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:30:30 GMT EAGLE5 36.0.0
ENT-SCR-SIO: MASP A - COMPLTD
```

```
ent-scr-sio:sr=isp1:nic=2:si=5:pri=3:nsfi=isup:nsr=isp1
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:30:30 GMT EAGLE5 36.0.0
ENT-SCR-SIO: MASP A - COMPLTD
```

```
ent-scr-sio:sr=tup1:nic=2:si=4:pri=3:nsfi=dpc:nsr=tup1
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:30:30 GMT EAGLE5 36.0.0
ENT-SCR-SIO: MASP A - COMPLTD
```

```
ent-scr-sio:sr=tup1:nic=2:si=5:pri=3:nsfi=dpc:nsr=isp2
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:30:30 GMT EAGLE5 36.0.0
ENT-SCR-SIO: MASP A - COMPLTD
```

- Verify the changes using the **rtrv-scr-sio** command with the screening reference name used in step 6.

For this example, enter these commands.

```
rtrv-scr-sio:sr=iec
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:31:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED SIO
SR   NIC  PRI  SI  H0  H1  NSFI  NSR/ACT
IEC  2    0&&3  0  0    0  BLKDPC WDB2
IEC  2    0&&2  0  1    1  DPC    WDB3
IEC  2    0&&1  0  2    2  STOP   -----
IEC  2    0&&3  4  --   --   STOP   -----
IEC  2    0&&2  1  *    *    DPC    WDB3
IEC  2    1&&3  3  --   --   CGPA   GW11
```

```
rtrv-scr-sio:sr=ls02
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:32:30 GMT EAGLE5 36.0.0
```

```
SCREEN = ALLOWED SIO
SR      NIC  PRI  SI  H0      H1      NSF1      NSR/ACT
LS02   2    3    3    --      --      CDPA      LS03
```

rtrv-scr-sio:sr=fld4

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:33:30 GMT  EAGLE5 36.0.0
SCREEN = ALLOWED SIO
SR      NIC  PRI  SI  H0      H1      NSF1      NSR/ACT
FLD4   2    3    0    4      5      DESTFLD  FDL5
```

rtrv-scr-sio:sr=isp1

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:33:30 GMT  EAGLE5 36.0.0
SCREEN = ALLOWED SIO
SR      NIC  PRI  SI  H0      H1      NSF1      NSR/ACT
isp1   2    3    5    --      --      ISUP      isp1
```

rtrv-scr-sio:sr=tup1

The following is an example of the possible output.


```
rlghncxa03w 06-10-25 15:33:30 GMT  EAGLE5 36.0.0
SCREEN = ALLOWED SIO
SR      NIC  PRI  SI  H0      H1      NSF1      NSR/ACT
tup1   2    3    4    --      --      DPC       tup1
tup1   2    3    5    --      --      ISUP      isp2
```


8. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.


The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 10-2. Adding an Allowed SIO Screen

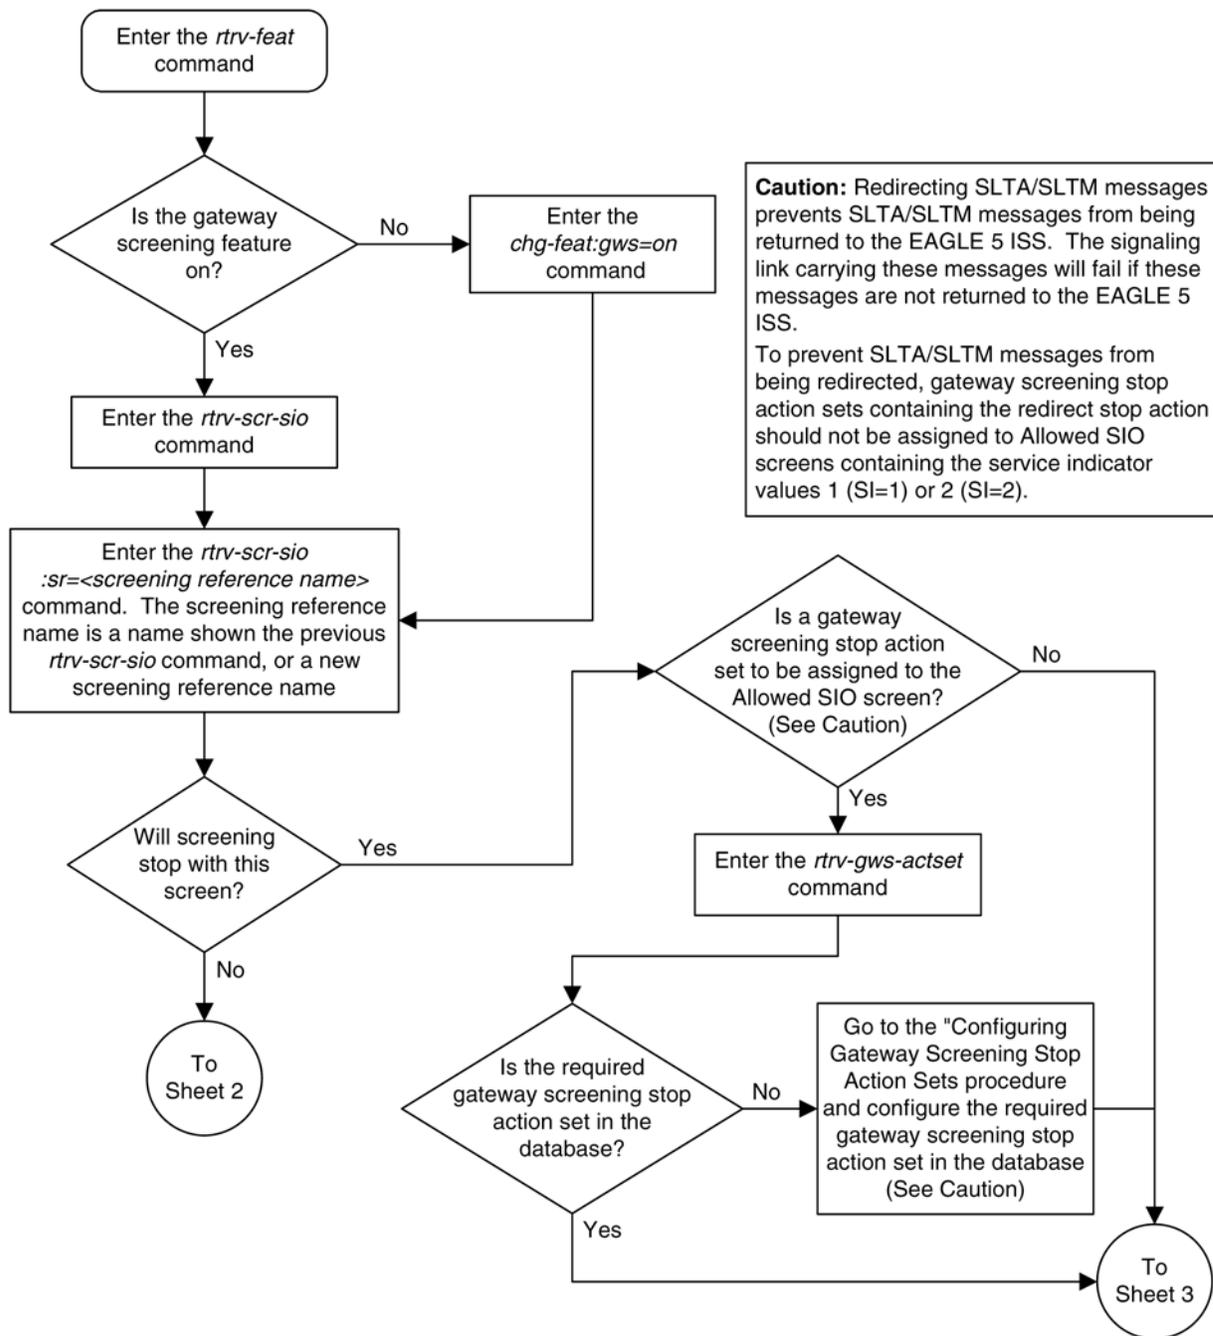

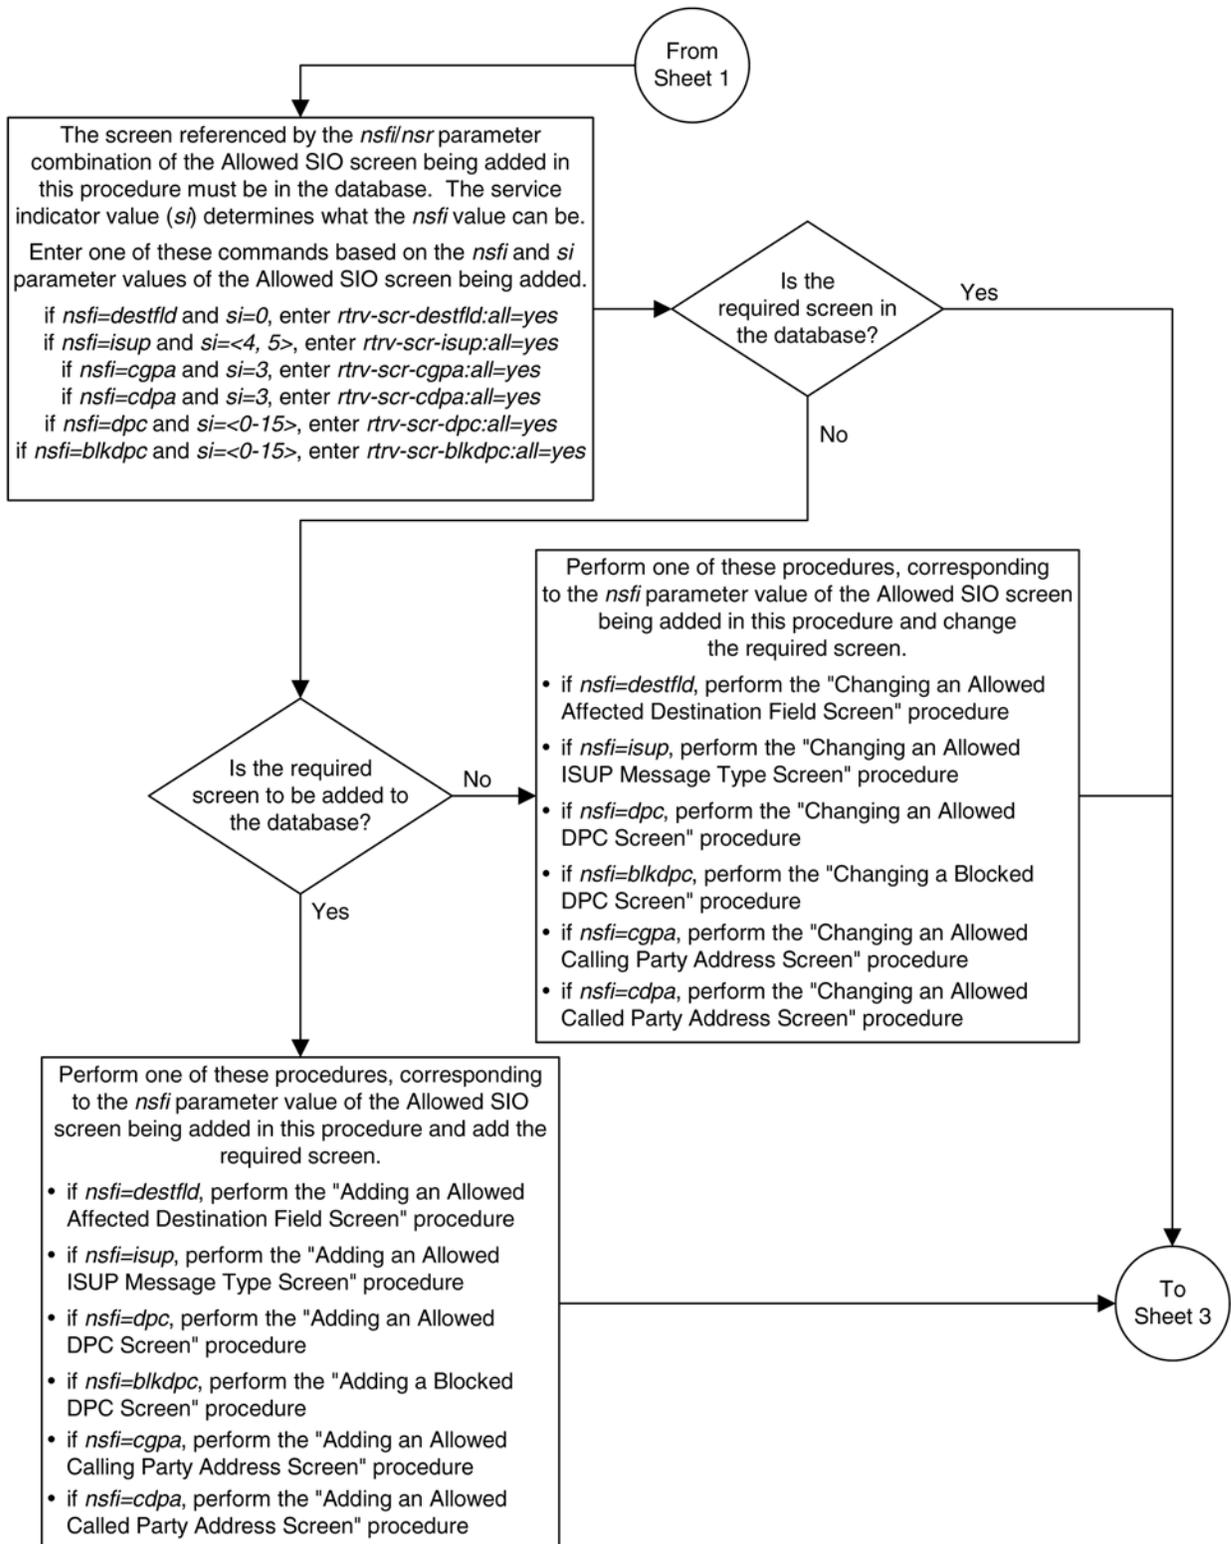

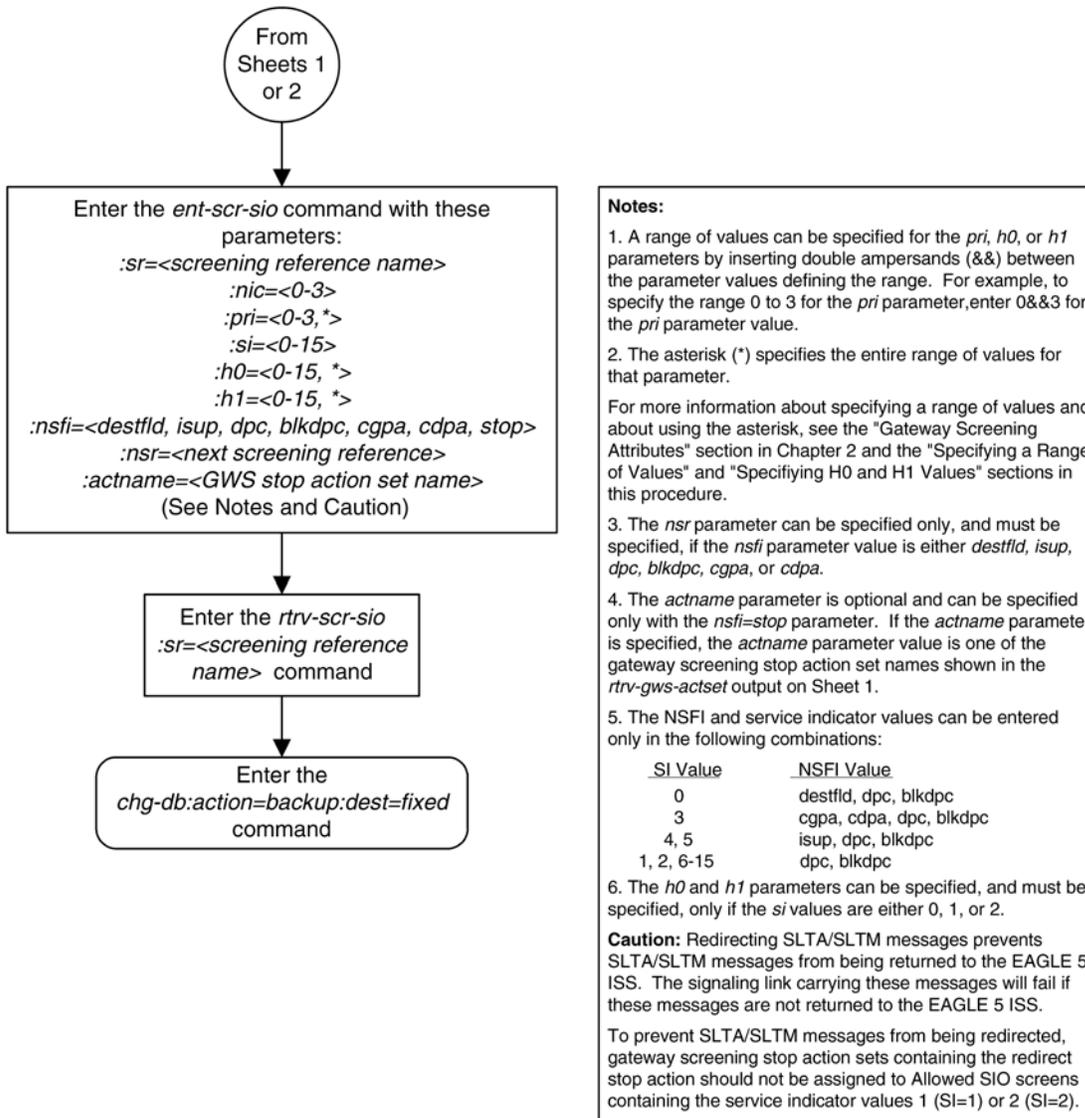

Removing an Allowed SIO Screen

This procedure is used to remove an allowed signaling information octet (SIO) screen from the database using the **dlt-scr-sio** command. The parameters used by the **dlt-scr-sio** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The example in this procedure removes the allowed SIO screen **1s02** from the database.

The allowed SIO screen can be referenced by one of the following screens.

- Screen Set
- Allowed OPC
- Blocked OPC

Verifying the Gateway Screening Configuration

Enter the following commands to verify that none of these screens reference the allowed SIO screen being removed from the database.

- `rtrv-scrset:nsfi=sio`
- `rtrv-scr-opc:nsfi=sio`
- `rtrv-scr-blkopc:nsfi=sio`

Gateway Screening Configuration Procedures

To change the NSFI of any of these screens, perform one of these procedures.

- [Changing a Screen Set](#)
- [Changing an Allowed OPC Screen](#)
- [Changing a Blocked OPC Screen](#)

Procedure

1. Display the allowed SIO screens in the database using the `rtrv-scr-sio` command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED SIO

SR   REF  RULES
IEC  YES   6
ISP1 YES   1
WRD2 YES   1
WRD4 YES   9
LS02 YES   1
TUP1 YES   2
```

From the `rtrv-scr-sio` output, display the allowed SIO screen you wish to remove using the `rtrv-scr-sio` command with the screening reference name. For this example, enter this command.

```
rtrv-scr-sio:sr=ls02
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED SIO
SR   NIC  PRI  SI  H0    H1    NSFI  NSR/ACT
LS02 2     3    3   --    --    CDPA  LS03
```

2. Enter the commands in the [Verifying the Gateway Screening Configuration](#) section to verify that the screen being removed is not referenced by other screens in the database.

If the screen being removed is referenced by other screens, perform the procedures shown in the [Gateway Screening Configuration Procedures](#) to change the NSFI of those screens to reference other screens or change the NSFI of these screens to STOP.

3. Remove the allowed SIO to the database using the `dlt-scr-sio` command.

The `dlt-scr-sio` command must be entered with these parameters: `sr`, `nic`, `si`, `pri`. The values for these parameters must be entered exactly as shown in the `rtrv-scr-sio` output in step 1. If the screen being removed has values for the `h0` and `h1` parameters, these values must be entered with the other parameter values. If the screen being removed contains dashes for the `h0` and `h1` parameters, the `h0` and

h1 parameters cannot be specified with the **dlt-scr-sio** command. For this example, enter this command.

```
dlt-scr-sio:sr=ls02:nic=2:si=3:pri=3
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
DLT-SCR-SIO: SCREEN SET AFFECTED - LS02 0% FULL
DLT-SCR-SIO: MASP A - COMPLTD
```

4. Verify the changes using the **rtrv-scr-sio** command with the screening reference name used in step 3.

For this example, enter this command.

```
rtrv-scr-sio:sr=ls02
```

The following is an example of the possible output.

```
E2573 Cmd Rej: SR or NSR does not reference an existing SR
```


This message shows that the specified screening reference name is not in the database and the action of the **dlt-scr-sio** command in step 3 was successful. If the specified screening reference name contained more than one entry when the **dlt-scr-sio** command was executed in step 3, the **rtrv-scr-sio:sr=** command output would show the remaining entries in the screening reference instead of error message E2573.

5. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 10-3. Removing an Allowed SIO Screen

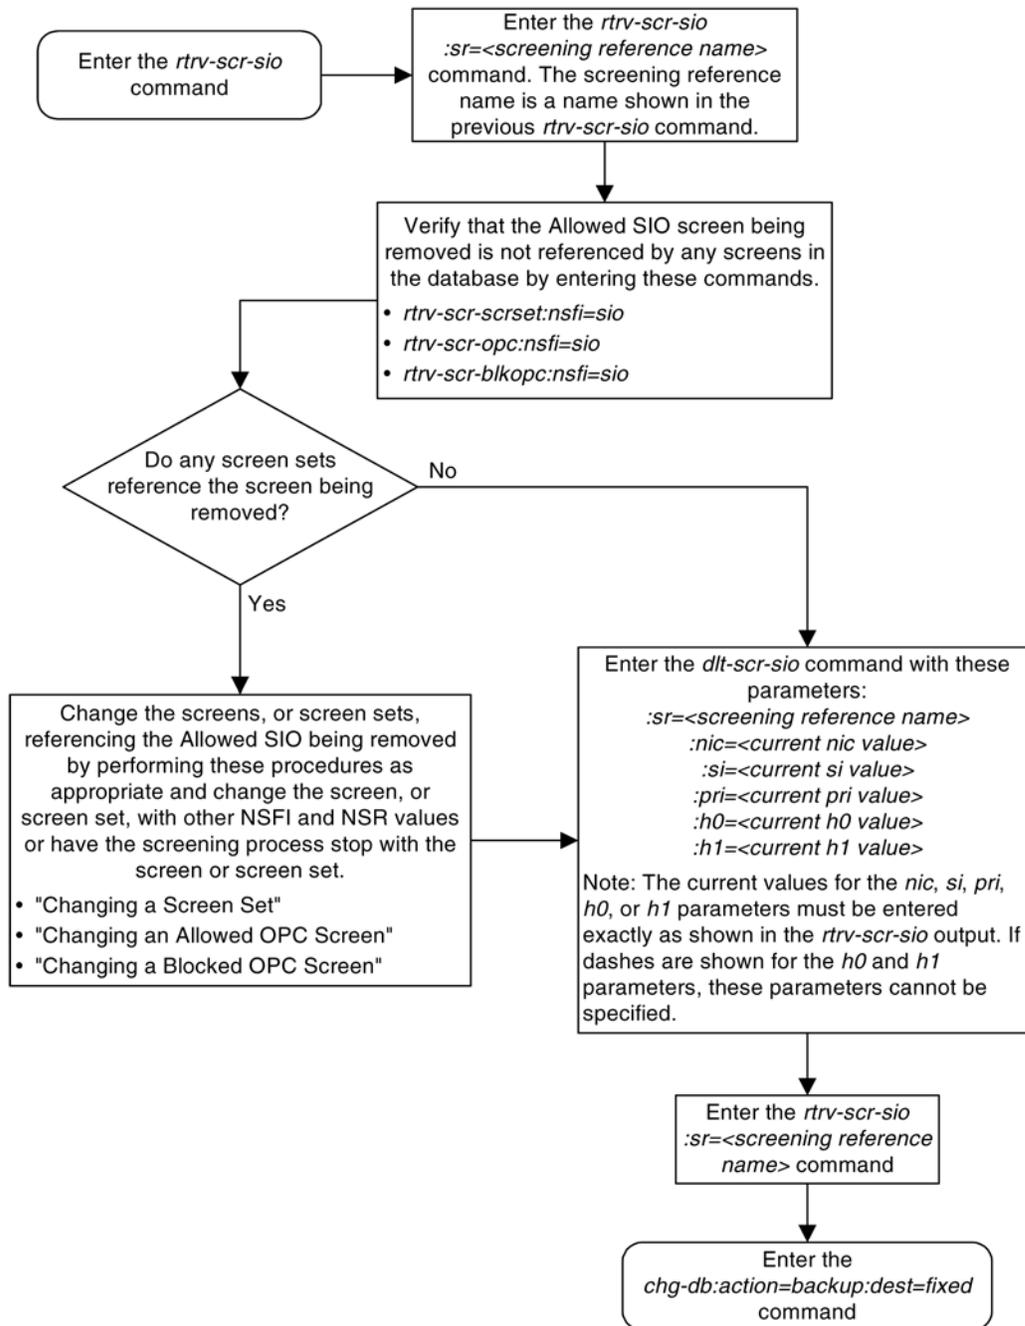

Changing an Allowed SIO Screen

This procedure is used to change the attributes of an allowed signaling information octet (SIO) screen in the database using the **chg-scr-sio** command. The parameters used by the **chg-scr-sio** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The example in this procedure change the allowed SIO screen **ls02** to an **nic** of 2, an **si** of 14, and an **nsfi** is stop.

The allowed SIO screen can reference one of the following screens.

- Allowed DPC
- Blocked DPC
- Allowed Affected Destination Field
- Allowed ISUP
- Allowed CGPA
- Allowed CDPA

Verifying the Gateway Screening Configuration

Enter the following commands to verify that these screens are in the database.

- **rtrv-scr-dpc:all=yes**
- **rtrv-scr-blkdpc:all=yes**
- **rtrv-scr-destfld:all=yes**
- **rtrv-scr-isup:all=yes**
- **rtrv-scr-cgpa:all=yes**
- **rtrv-scr-cdpa:all=yes**

Gateway Screening Configuration Procedures

If the desired screen is not in the database, perform one of these procedures to add the desired screen to the database or change an existing screen in the database.

- [Adding an Allowed DPC Screen](#)
- [Adding a Blocked DPC Screen](#)
- [Adding an Allowed Affected Destination Field Screen](#)
- [Adding an Allowed ISUP Message Type Screen](#)
- [Adding an Allowed Calling Party Address Screen](#)
- [Adding an Allowed Called Party Address Screen](#)
- [Changing an Allowed DPC Screen](#)
- [Changing a Blocked DPC Screen](#)
- [Changing an Allowed Affected Destination Field Screen](#)
- [Changing an Allowed ISUP Message Type Screen](#)
- [Changing an Allowed Calling Party Address Screen](#)
- [Changing an Allowed Called Party Address Screen](#)

The new values for the network indicator code, service indicator, priority, and heading codes being changed in the allowed SIO screen cannot be in that screen.

Specifying a Range of Values

A range of values can be specified for the **pri**, **h0**, and **h1** parameters. If a range of values is specified for any of these parameters and the **nic** and **si** values in the screening reference name are not changed, the range of values for the **pri**, **h0**, or **h1** parameters cannot include any values that are currently provisioned for the screening reference name.

For example, screening reference name **scr1** contains these entries:

SR	NIC	PRI	SI	H0	H1	NSFI	NSR/ACT
SCR1	2	3	1	4	5	DPC	LS03
SCR1	2	2	1	2	7	BLKDPC	LS04

Another entry for screening reference **scr1** with the same **nic** and **si** values cannot be specified if:

- The range of values for the **pri** parameter includes the values 2 or 3
- The range of values for the **h0** parameter includes the values 2 or 4
- The range of values for the **h1** parameter includes the values 5 or 7.

Changing H0 and H1 Values

The **h0** and **h1** values must be specified if the **si** value is 0, 1, or 2. If the **si** value is 3 through 15, the **h0** and **h1** parameters cannot be specified.

The **nh0** and **nh1** values must be specified if the **nsi** value is 0, 1, or 2. If the **nsi** value is 3 through 15, the **nh0** and **nh1** parameters cannot be specified.

The **h0** and **h1** parameters must be specified if either parameter is specified.

The **nh0** and **nh1** parameters must be specified if either parameter is specified.

The H0 and H1 heading code values can be a single value, a range of values with the beginning and end of the range separated by double ampersands (for example, a range of values from 2 to 9, 2&&9), or with an asterisk (*). The asterisk specifies all possible values for the h0 and h1 parameters. [Table 10-4](#) shows the valid combinations of these parameter values.

Table 10-4. Valid Value Combinations for H0 and H1 Parameters

H0	H1
Single Value	Single Value
Single Value	Range of Values
Single Value	Asterisk
Range of Values	Asterisk
Asterisk	Asterisk

Procedure

1. Display the allowed SIO screens in the database using the **rtrv-scr-sio** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED SIO
SR   REF  RULES
IEC  YES   6
ISP1 YES   1
```

```
WRD2 YES 1
WRD4 YES 9
LS02 YES 1
TUP1 YES 2
```

From the **rtrv-scr-sio** output, display the allowed SIO screen you wish to change using the **rtrv-scr-sio** command with the screening reference name. For this example, enter this command.

```
rtrv-scr-sio:sr=ls02
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED SIO
SR  NIC  PRI  SI  H0      H1      NSF1  NSR/ACT
LS02 2    3    3  --      --      CDPA  LS03
```

If a gateway screening stop action set is to be assigned to the allowed SIO screen being changed in the database, go to step 2.

Step 2 verifies the gateway screening stop action set names in the database. The gateway screening stop action set names are assigned only if the NSF1 of the screen being changed in this procedure is STOP. If the NSF1 of the screen will be changed to STOP, but a gateway screening stop action set name will not be assigned to the screen, skip steps 2 and 3 and go to step 4. If the NSF1 of the screen will not be STOP, skip step 2 and go to step 3.

2. Display the gateway screening stop action sets in the database with the **rtrv-gws-actset** command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
ACT ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT
ID  NAME  1    2    3    4    5    6    7    8    9    10
--  ----  ---  ---  ---  ---  ---  ---  ---  ---  ---  ---
1   copy  copy
2   rdct  rdct
3   cr    copy rdct
4   cnf   cnf
5   cpnfc copy cnf
6   cnfcd cnf rdct
7   cpcfd copy cnf rdct
```

GWS action set table is (7 of 16) 44% full

If the required gateway screening stop action set is not in the database, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure to configure the required gateway screening stop action set.

NOTE: If the NSF1 of the screen being changed in this procedure will be STOP, or if the NSF1 of the screen is not being changed, skip step 3 and go to step 4.

3. Enter the commands in the [Verifying the Gateway Screening Configuration](#) section to verify that the screen that will be specified by the NSF1/NSR parameter combination in step 4 is in the database.

If the desired screen is not in the database, perform one of the procedures shown in the [Gateway Screening Configuration Procedures](#) section to add the desired screen to the database or change an existing screen in the database.

4. Change the attributes of an allowed SIO screen using the **chg-scr-sio** command.

If a gateway screening stop action is to be assigned to the allowed SIO screen being changed, enter the **chg-scr-sio** command with the **nsf1=stop** parameter and the **actname** parameter with the name of a gateway screening stop action set shown in the output of the **rtrv-gws-actset** command executed in step 2.



CAUTION: Redirecting SLTA/SLTM messages prevents SLTA/SLTM messages from being returned to the EAGLE 5 ISS. The signaling link carrying these messages will fail if these messages are not returned to the EAGLE 5 ISS. To prevent SLTA/SLTM messages from being redirected, gateway screening stop action sets containing the redirect stop action should not be assigned to Allowed SIO screens containing the service indicator values 1 (SI=1) or 2 (SI=2).

The current values for the **nic**, **si**, **pri**, **h0** and **h1** parameters must be entered in the **chg-scr-sio** command exactly as shown in the **rtrv-scr-sio** output in step 1.

The following list contains the values for **nnic**, **nsi**, **npri**, **nh0** and **nh1** parameters:

- nnic – 0 - 3, or an asterisk (*)
- nsi – 0 - 15
- npri – 0 - 3, or an asterisk (*)
- nh0 – 0 - 15, or an asterisk (*)
- nh1 – 0 - 15, or an asterisk (*)

A range of values can be specified for the **npri**, **nh0**, and **nh1** parameters. See the [“Specifying a Range of Values”](#) section for more information. See the [“Changing H0 and H1 Values”](#) section for information on how the asterisk and a range of values are used for the **nh0** and **nh1** parameters.

The value of the **nsfi** parameter is based on the value of the service indicator (**si**) parameter. [Table 10-1](#) shows the valid combinations of **nsfi** values and service indicator values.

For this example, enter this command.

```
chg-scr-sio:sr=ls02:nic=2:si=3:pri=3:nsi=14:nsfi=stop
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
CHG-SCR-SIO: SCREEN SET AFFECTED - LS02 1% FULL
CHG-SCR-SIO: MASP A - COMPLTD
```

5. Verify the changes using the **rtrv-scr-sio** command with the screening reference name used in step 4.

For this example, enter this command.

```
rtrv-scr-sio:sr=ls02
```

The following is an example of the possible output.


```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED SIO
SR  NIC  PRI  SI  H0  H1  NSFI  NSR/ACT
LS02  2    3    14  --  --  STOP  -----
```


6. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.


The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 10-4. Changing an Allowed SIO Screen

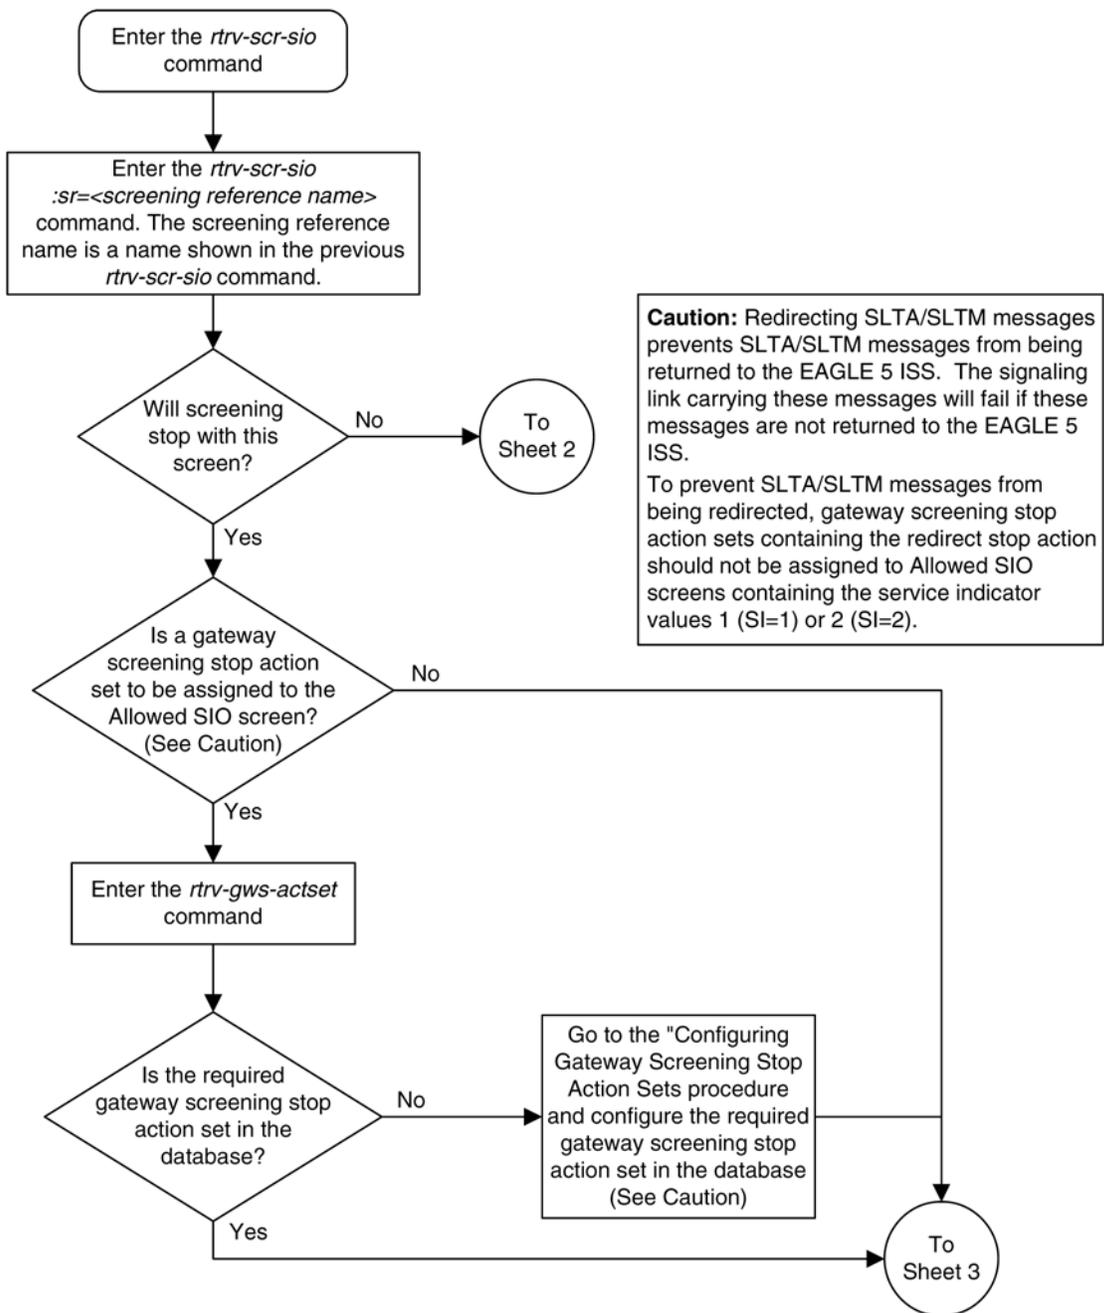

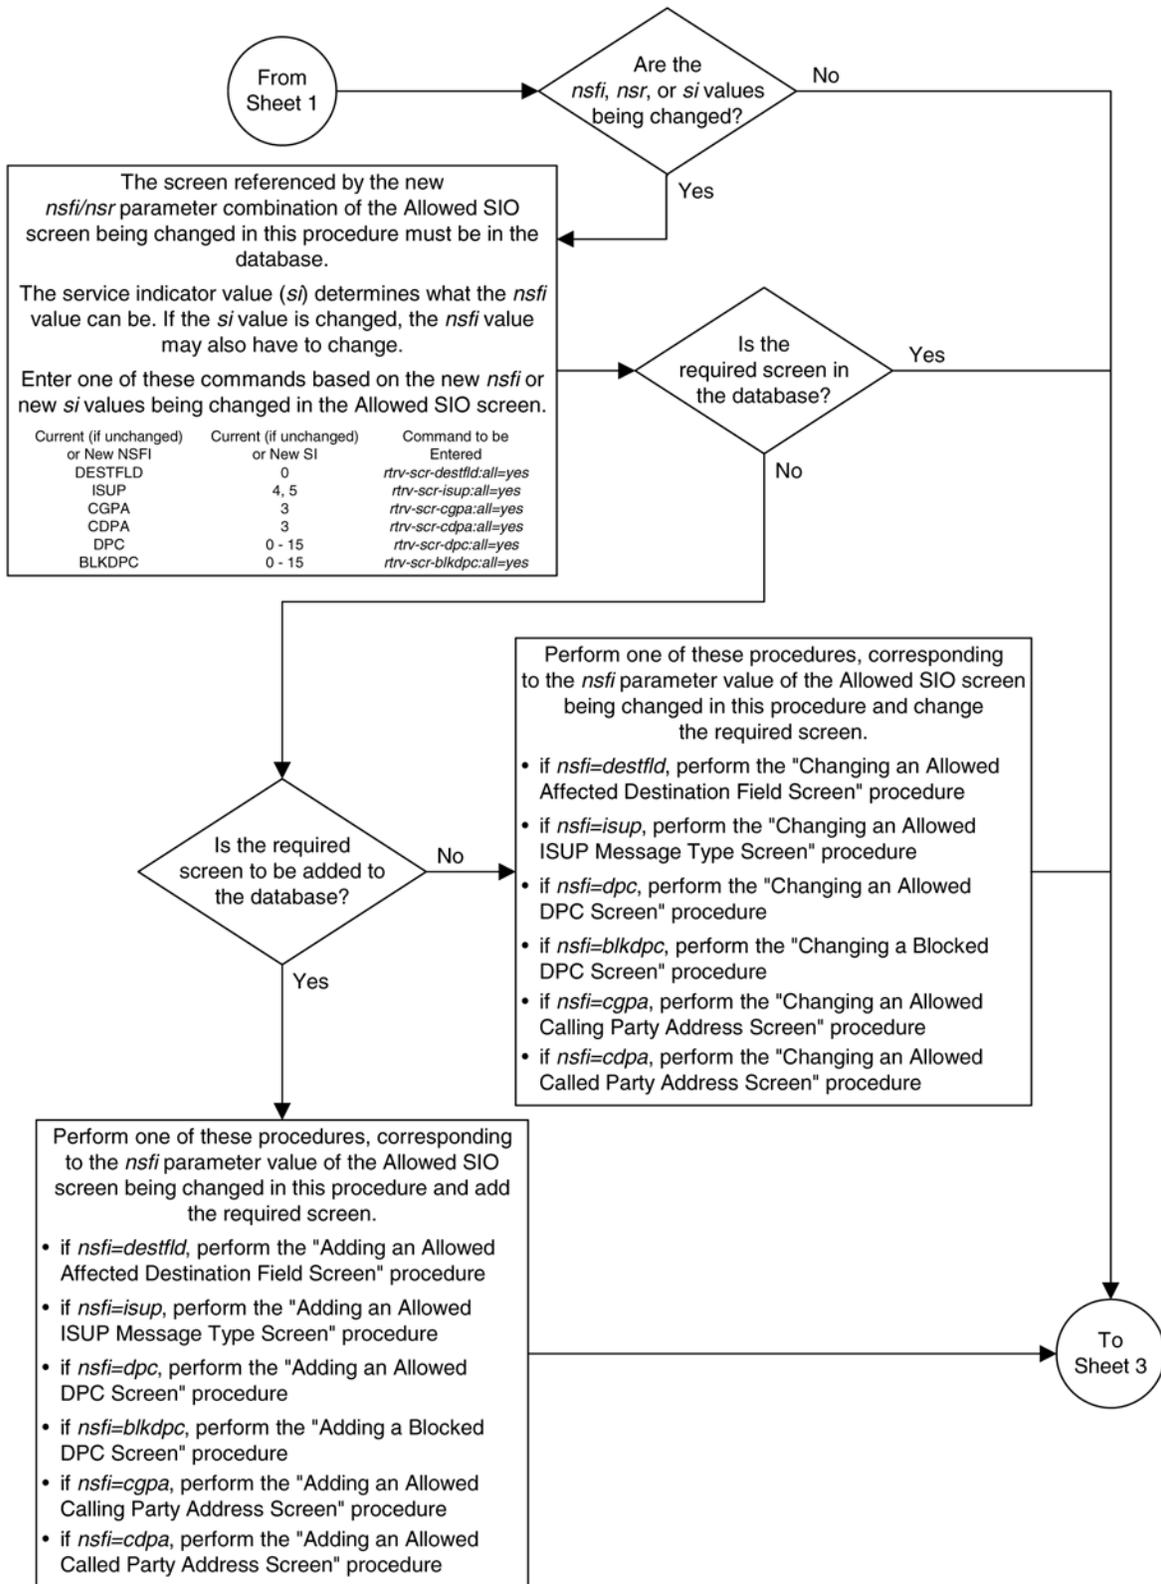

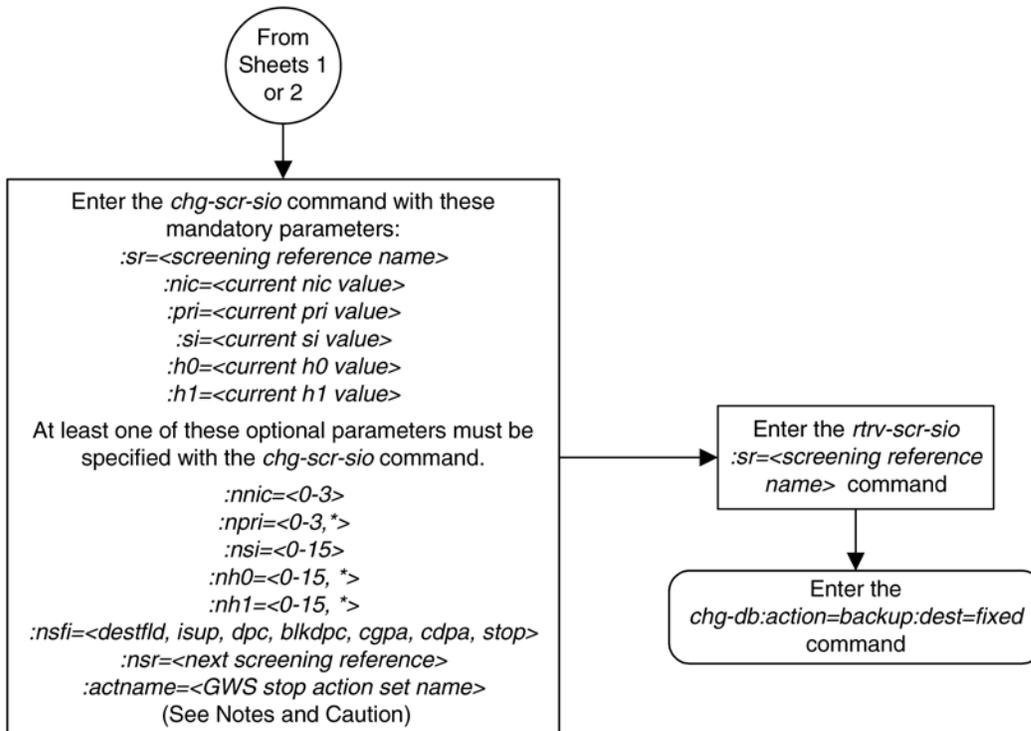

Notes:

1. A range of values can be specified for the *npri*, *nh0*, or *nh1* parameters by inserting double ampersands (&&) between the parameter values defining the range. For example, to specify the range 0 to 3 for the *npri* parameter, enter 0&&3 for the *npri* parameter value.
2. The asterisk (*) specifies the entire range of values for that parameter.

For more information about specifying a range of values and about using the asterisk, see the "Gateway Screening Attributes" section in Chapter 2 and the "Specifying a Range of Values" and "Specifying H0 and H1 Values" sections in this procedure.

3. The current values for the *nic*, *si*, *pri*, *h0*, or *h1* parameters must be entered exactly as shown in the *rtv-scr-sio* output. If dashes are shown for the *h0* and *h1* parameters, these parameters cannot be specified.
4. The *nsr* parameter can be specified only, and must be specified, if the *nsfi* parameter is specified and its value is either *destfld*, *isup*, *dpc*, *blkdp*, *cgpa*, or *cdpa*.
5. The *actname* parameter is optional and can be specified only if the current *nsfi* parameter is *stop*, or the new *nsfi* parameter value is *stop*. If the *actname* parameter is specified, the *actname* parameter value is one of the gateway screening stop action set names shown in the *rtv-gws-actset* output on Sheet 1.
6. If the *si* parameter value is 0, 1, or 2, the *h0* and *h1* parameters must be specified. If the *si* parameter value is 3 through 15, the *h0* and *h1* parameters cannot be specified.
7. If the *nsi* parameter value is 0, 1, or 2, the *nh0* and *nh1* parameters must be specified. If the *nsi* parameter value is 3 through 15, the *nh0* and *nh1* parameters cannot be specified.
8. The NSFI and service indicator values can be entered only in the following combinations:

Current (if unchanged) or New SI Value	Current (if unchanged) or New NSFI Value
0	destfld, dpc, blkdp
3	cgpa, cdpa, dpc, blkdp
4, 5	isup, dpc, blkdp
1, 2, 6 - 15	dpc, blkdp

Caution: Redirecting SLTA/SLTM messages prevents SLTA/SLTM messages from being returned to the EAGLE 5 ISS. The signaling link carrying these messages will fail if these messages are not returned to the EAGLE 5 ISS. To prevent SLTA/SLTM messages from being redirected, gateway screening stop action sets containing the redirect stop action should not be assigned to Allowed SIO screens containing the service indicator values 1 (SI=1) or 2 (SI=2).

Blocked Originating Point Code (BLKOPC) Screen Configuration

Introduction	11-1
Adding a Blocked OPC Screen	11-7
Removing a Blocked OPC Screen	11-19
Changing a Blocked OPC Screen	11-24

Introduction

The blocked OPC screen identifies OPC's that are not allowed to send SS7 messages into the network. The gray shaded areas in [Figure 11-1](#) shows the fields of the SS7 message that are checked by the blocked OPC screening function. If a match is found, the **nsfi** is equal to **fail**, the message is discarded and no further screening takes place. If no match is found, the **nsfi** is examined to determine the next step in the screening process. If the **nsfi** is equal to **stop**, the message is processed and no further screening takes place.

If the **nsfi** is equal to **stop**, and the **copy** gateway screening stop action is specified, the message is processed and a copy of the message is sent by the STPLAN feature to an external application.

If the **nsfi** is equal to **stop**, and the **rdct** (redirect) gateway screening stop action is specified, the message is diverted from the original destination and sent to another destination with the Database Transport Access feature, specified by global title translation, for further processing.

If the Calling Name Conversion Facility (CNCf) feature is on, the **nsfi** is equal to **stop**, and the **cncf** gateway screening stop action is specified, the PIP parameter in the incoming ISUP IAM message is converted to the GN parameter. The GN parameter in the incoming ISUP IAM message is converted to the PIP parameter. The message is then sent to the node specified by the DPC in the routing label in the message. For more information on the Calling Name Conversion Facility feature, see [Chapter 14 Calling Name Conversion Facility \(CNCf\) Configuration](#)

If the Triggerless LNP (TLNP) feature is on, the **nsfi** is equal to **stop**, and the **tlnp** gateway screening stop action is specified, ISUP IAMs that pass gateway screening are processed either by the ISUP NP with EPAP feature (if the ISUP NP with EPAP feature is enabled and turned on) or by the Triggerless LNP feature (if the Triggerless LNP feature is turned on). The ISUP NP with EPAP feature is discussed in more detail in the *Feature Manual - G-Port*. The Triggerless LNP feature is discussed in more detail in the *LNP Feature Activation Guide*.


If the Triggerless ISUP based Number Portability (TINP) feature is enabled, the **nsfi** is equal to **stop**, and the **tinp** gateway screening stop action is specified, ISUP IAMs that pass gateway screening are intercepted by the


Triggerless ISUP based Number Portability (TINP) feature and converted to include the routing number (RN) if the call is to a ported number. The TINP feature is discussed in more detail in the *Feature Manual - G-Port*.


If the **nsfi** is equal to anything else, the next screening reference (**nsr**) is identified and the screening process continues to the next screen identified by the **nsfi** and **nsr** parameters.


[Flowchart 11-40](#) shows the screening action of the blocked OPC screen.

Flowchart 11-1. Blocked OPC Screening Action

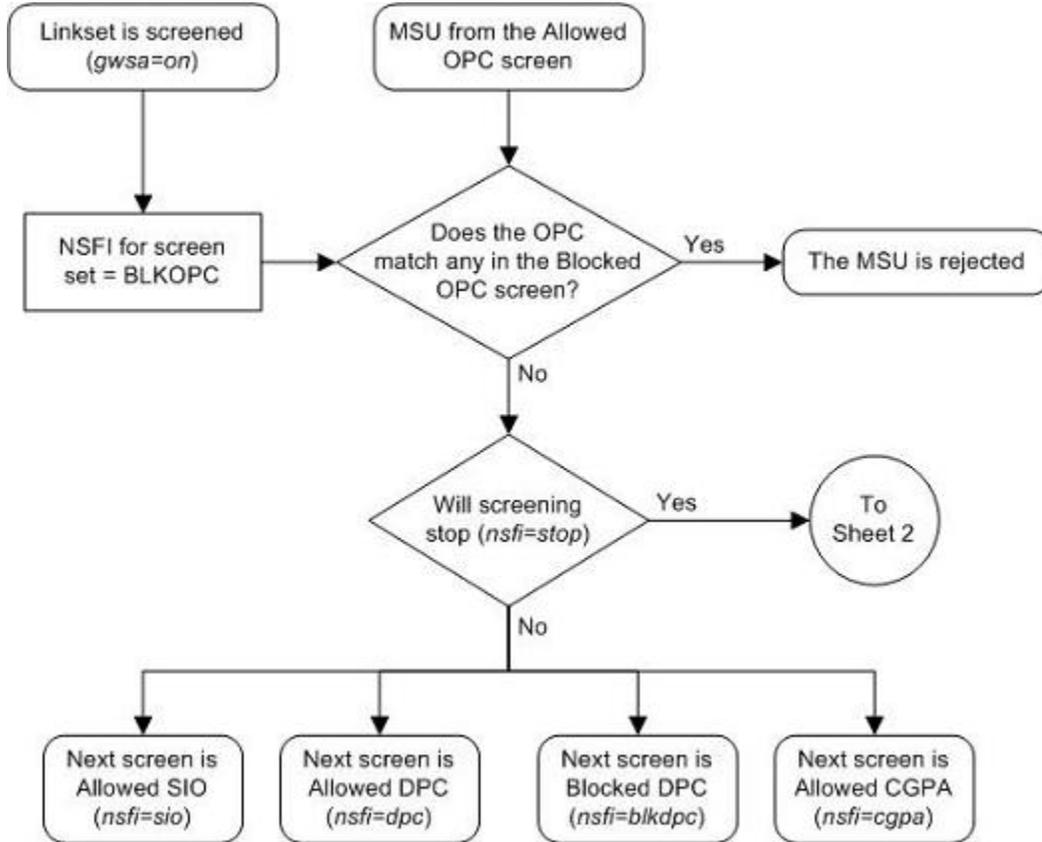

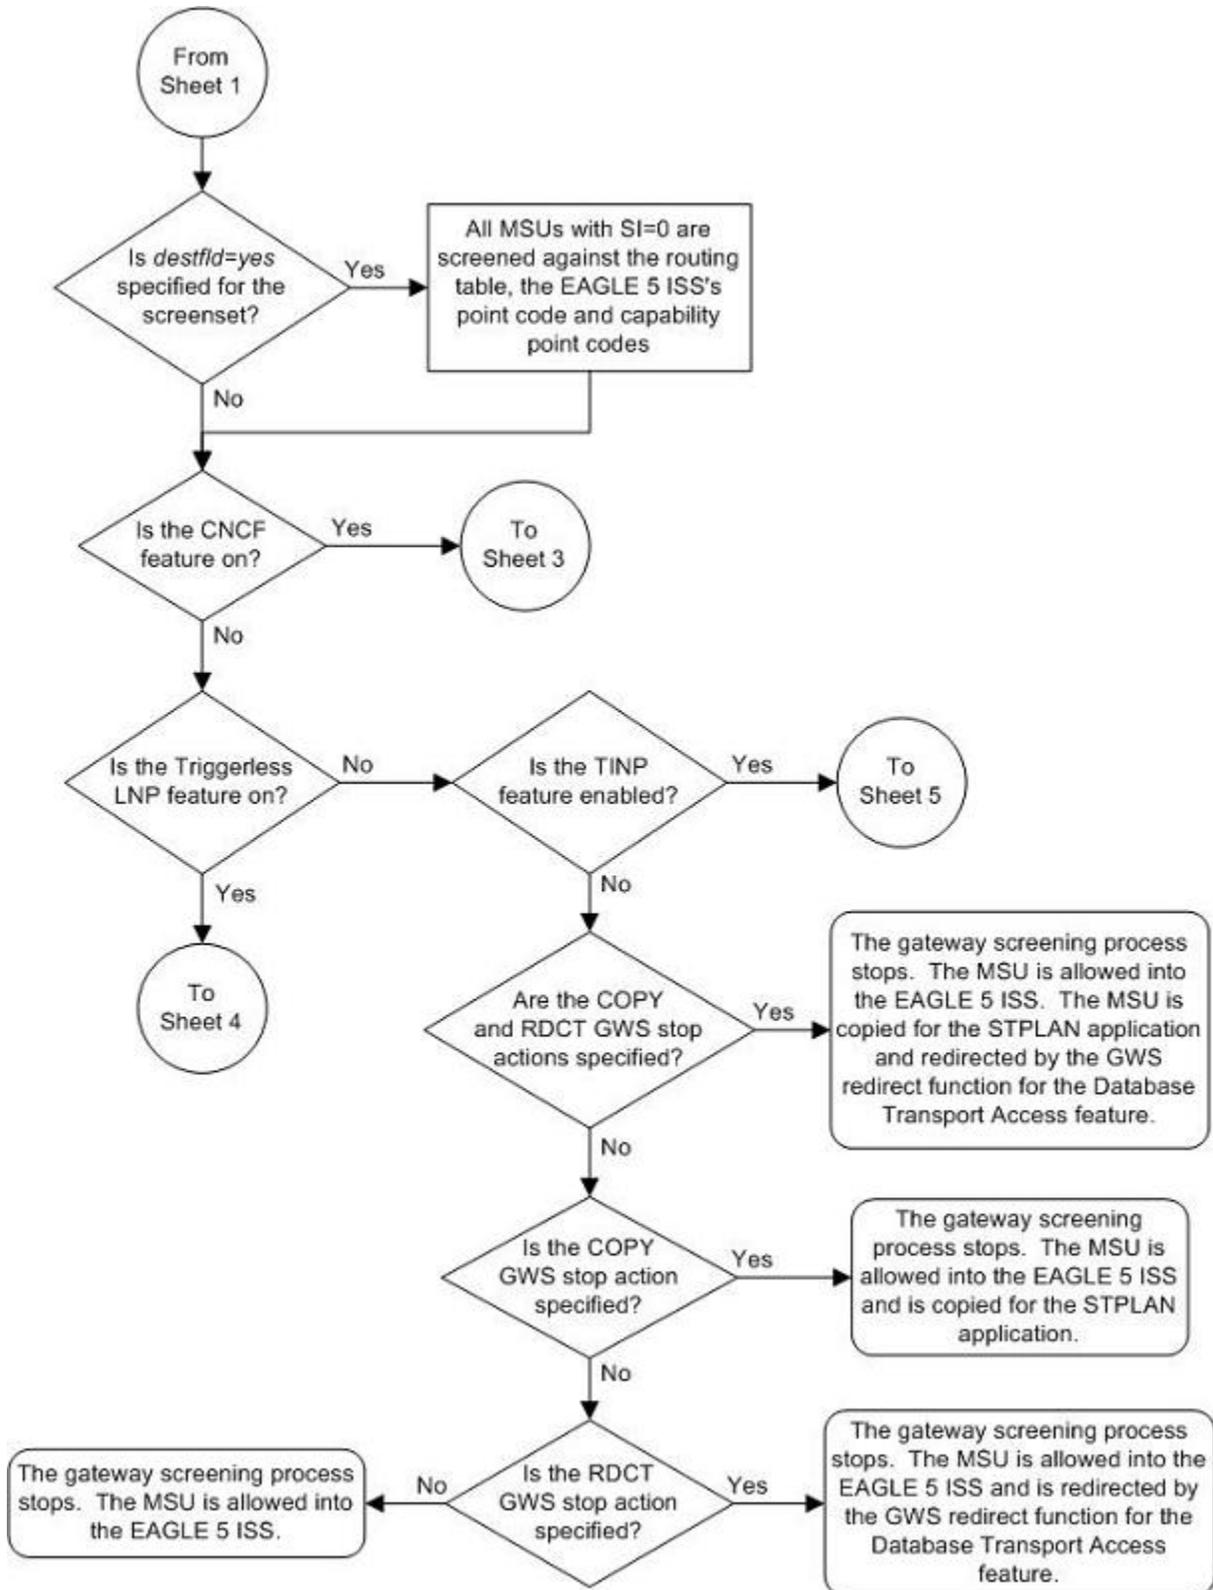

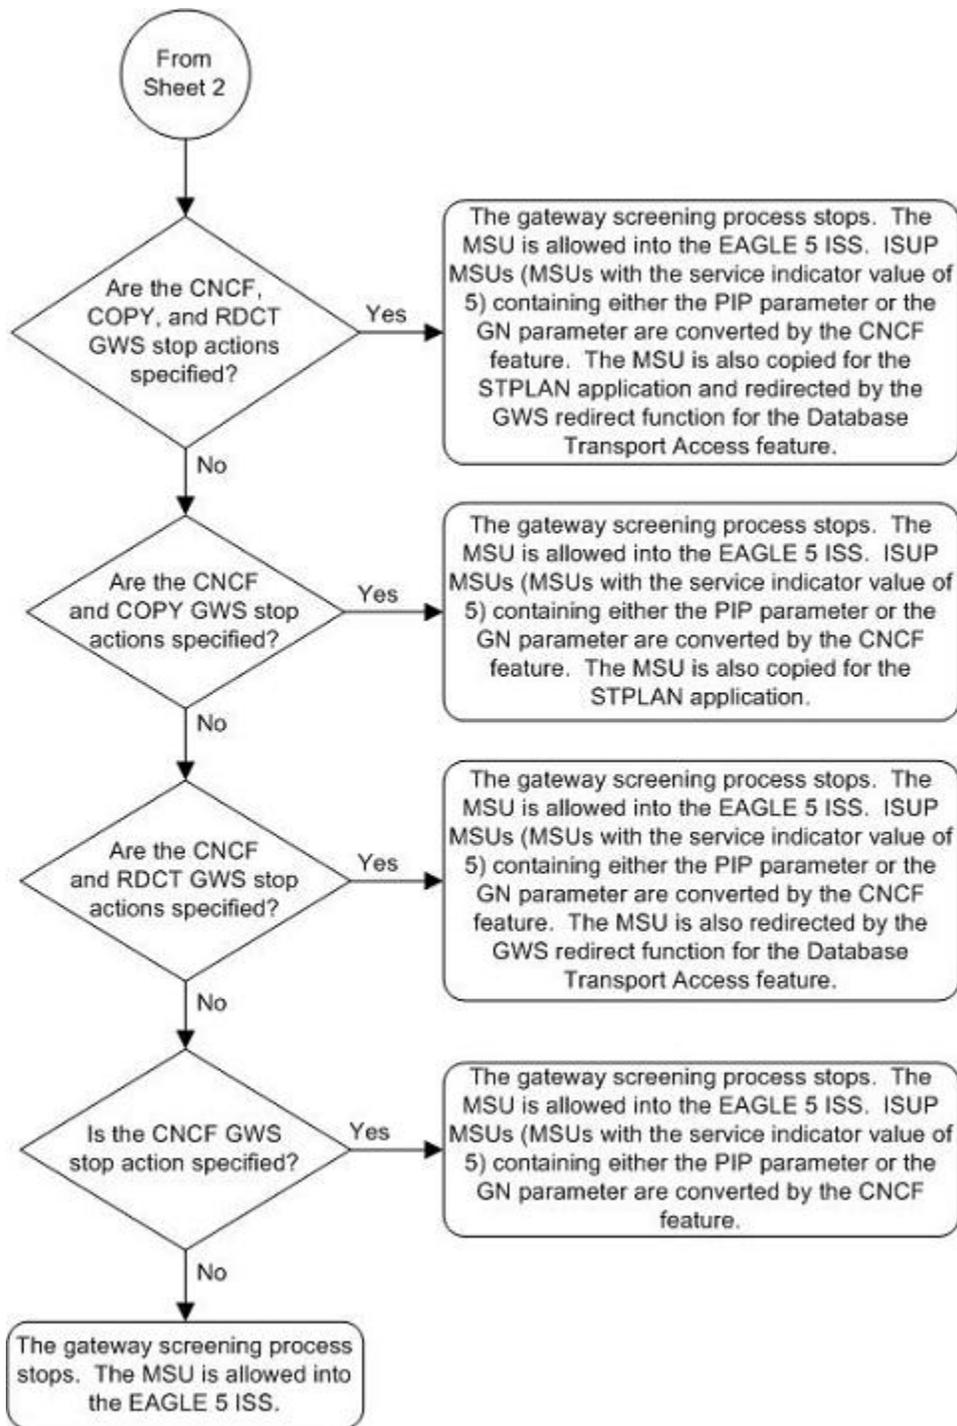

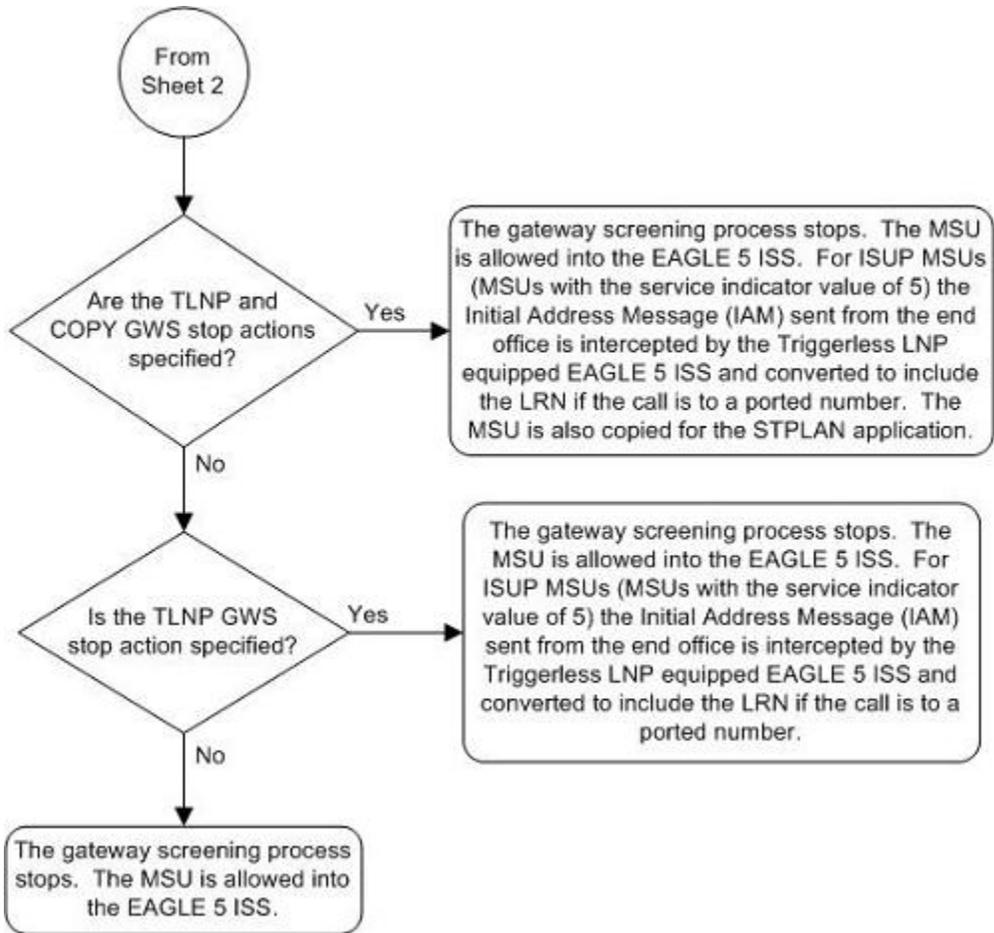


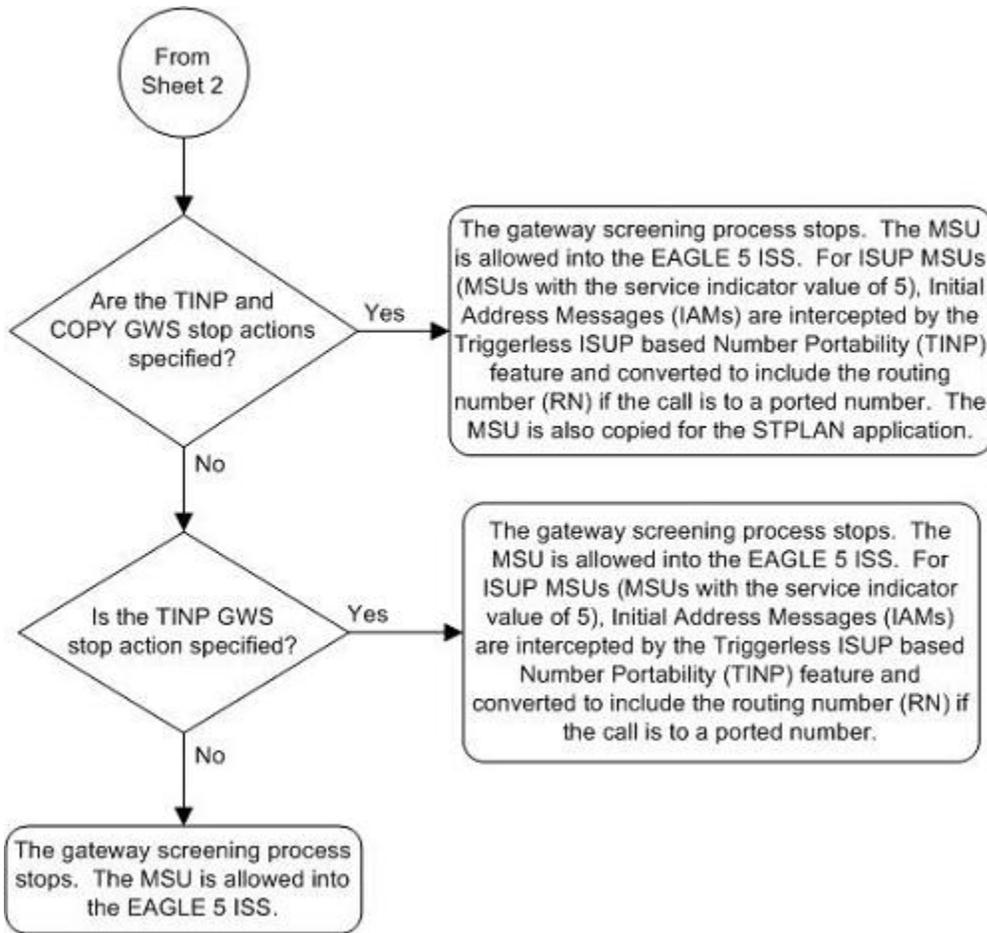


Figure 11-1. Blocked OPC Screening Functions

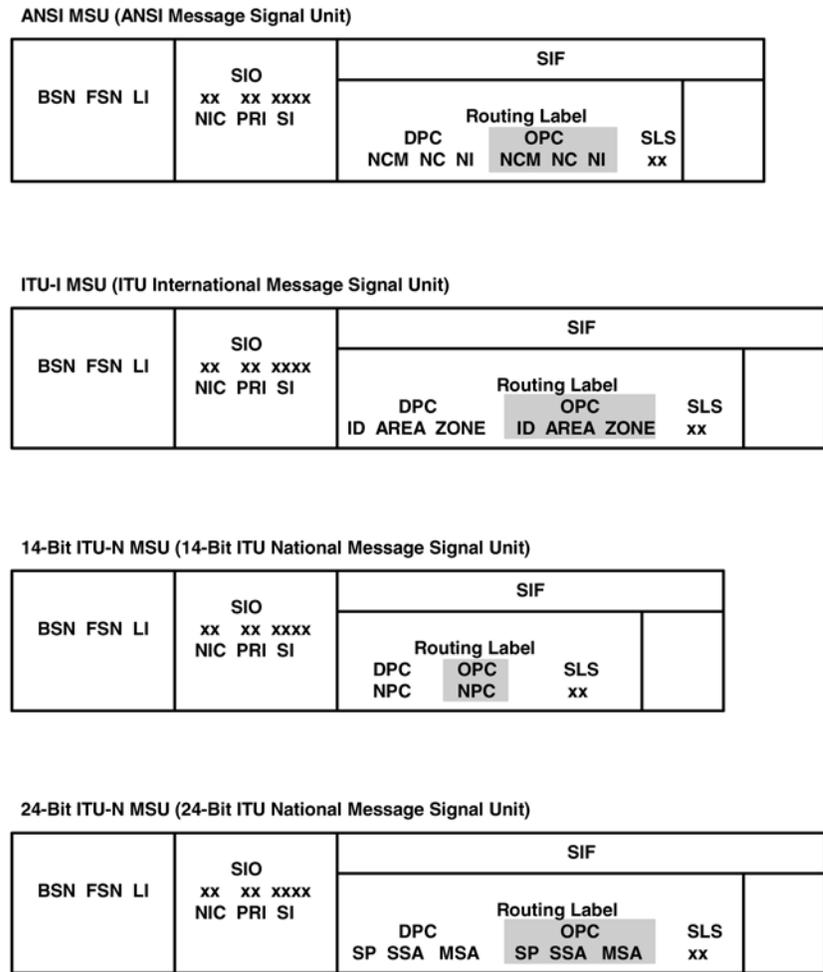

Adding a Blocked OPC Screen

This procedure is used to add a blocked originating point code (OPC) screen to the database using the **ent-scr-blkopc** command. The parameters used by the **ent-scr-blkopc** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The examples in this procedure are used to add the blocked OPC screen data shown in [Table 11-1](#) and based on the example configurations shown in [Figure 2-3](#), [Figure 2-4](#), and [Figure 2-7](#).

Table 11-1. Example Gateway Screening Blocked OPC Configuration Table

Screening Reference	ZONE	AREA	ID	NSFI	NSR
gws5	C	C	C	sio	iec
gws5	4	250	3	fail	----
Screening Reference	NI	NC	NCM	NSFI	NSR

fld3	C	C	C	sio	fld4
fld3	020	020	020	fail	----
gws3	C	C	C	dpc	gws9
gws3	001	002	002	fail	----
isp1	C	C	C	sio	isp1
isp1	025	025	025	fail	----

NOTE: If you using multiple-part ITU national point codes with gateway screening, see the [14-Bit ITU National Point Code Formats](#) section.

The blocked OPC screen can reference one of the following screens.

- Allowed SIO
- Allowed DPC
- Blocked DPC
- Allowed CGPA

Verifying the Gateway Screening Configuration

Enter the following commands to verify that these screens are in the database.

- `rtrv-scr-sio:all=yes`
- `rtrv-scr-dpc:all=yes`
- `rtrv-scr-blkdpc:all=yes`
- `rtrv-scr-cgpa:all=yes`

Gateway Screening Configuration Procedures

If the desired screen is not in the database, perform one of the following procedures to add the desired screen to the database or change an existing screen in the database.

- [Adding an Allowed SIO Screen](#)
- [Adding an Allowed DPC Screen](#)
- [Adding a Blocked DPC Screen](#)
- [Adding an Allowed Calling Party Address Screen](#)
- [Changing an Allowed SIO Screen](#)
- [Changing an Allowed DPC Screen](#)
- [Changing a Blocked DPC Screen](#)
- [Changing an Allowed Calling Party Address Screen](#)

For the first entry for a specific screening reference, the value for the point code must be **c**, and the NSFI must be either **stop**, **sio**, **dpc**, **blkdpc**, or **cgpa**. If the NSFI is **stop**, the screening of the message will stop at the specified blocked OPC screen. If the NSFI is either **sio**, **dpc**, **blkdpc**, or **cgpa**, then any message containing a point code that is not listed in the blocked OPC screen with a NSFI equal to **fail**, will continue to be screened with either the allowed SIO, allowed DPC, blocked DPC, or the allowed CGPA screen.

All subsequent entries for that screening reference must contain a numeric point code value, the NSFI must be equal to **fail**, and the **nsr** parameter cannot be specified. Any message that contains an OPC in the blocked OPC screen with the NSFI equal to **fail** will be rejected from the network and the screening process is stopped.

The **pcst** parameter, specifying whether or not the ITU-I or 14-bit ITU-N point code is a spare point code, cannot be used with the **zone=c** or **npc=c** parameters.

Specifying a Range of Values

A range of values can be specified for the point code parameters **ni**, **nc**, or **ncm**.

If a range of values is specified for any of these parameters, and the value of the other parameters match existing values for the screening reference name, the range of values for the point code parameter cannot include any values for that parameter that are currently provisioned for the screening reference name.

For example, screening reference name **scr1** contains these entries:

SR	NI	NC	NCM	NSFI	NSR/ACT
SCR1	240	001	010	FAIL	-----
SCR1	241	010	020	FAIL	-----

Another entry for screening reference **scr1** with the **ni** value of 240 and the **nc** value of 001 cannot be specified if the range of values for the **ncm** parameter includes the value 010.

The ANSI point code parameter values can be specified as a single value, a range of values, or with an asterisk (*). The asterisk specifies all possible values for the **ni**, **nc**, and **ncm** parameters. [Table 11-2](#) shows the valid combinations of these parameter values.

Table 11-2. Valid Value Combinations for ANSI Point Code Parameters

NI	NC	NCM
Single Value	Single Value	Single Value
Single Value	Single Value	Range of Values
Single Value	Single Value	Asterisk
Single Value	Range of Values	Asterisk
Single Value	Asterisk	Asterisk
Range of Values	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

A range of values can also be specified for an ITU-I or 24-bit ITU-N point code parameter using a combination of asterisks (*) and single values for the point code parameters. [Table 11-3](#) shows the valid combinations of the ITU-I parameter values. [Table 11-4](#) shows the valid combinations of the 24-bit ITU-N parameter values.

Table 11-3. Valid Value Combinations for ITU-I Point Code Parameters

ZONE	AREA	ID
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Table 11-4. Valid Value Combinations for 24-Bit ITU-N Point Code Parameters

MSA	SSA	SP
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Procedure

1. Verify that the gateway screening feature is on, by entering the **rtrv-feat** command.

If the gateway screening feature is on, the **GWS** field is set to **on**.

NOTE: The rtrv-feat command output contains other fields that are not used by this procedure. If you wish to see all the fields displayed by the rtrv-feat command, see the rtrv-feat command description in the *Commands Manual*.

If the gateway screening feature is on, shown by the entry **GWS = on** in the **rtrv-feat** command output, skip step 2, and go to step 3.

2. Turn the gateway screening feature on by entering this command.

chg-feat:gws=on

NOTE: Once the gateway screening feature is turned on with the chg-feat command, it cannot be turned off.

The gateway screening feature must be purchased before you turn this feature on with the chg-feat command. If you are not sure if you have purchased the gateway screening feature, contact your Tekelec Sales Representative or Account Representative.

When the **chg-feat** has successfully completed, this message should appear.

```
rlghncxa03w 06-10-28 11:43:04 GMT EAGLE5 36.0.0
CHG-FEAT: MASP A - COMPLTD
```

3. Display all blocked OPC screens in the database using the **rtrv-scr-blkopc** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = BLOCKED OPC
SR   REF  RULES
IEC  YES   2
WRD2 YES   1
WRD4 YES   9
```

If the screening reference names that you wish to add with this procedure are not shown in the **rtrv-scr-blkopc** command output, go to step 4. For this example, the screening reference names are not shown. If these screening reference names are shown in the **rtrv-scr-blkopc** command output, make sure the screening data you wish to enter is not already in the database by entering the **rtrv-scr-blkopc** command with the screening reference name. For example, enter the **rtrv-scr-blkopc:sr=iec** command. The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
SCREEN = BLOCKED OPC
SR   NI      NC      NCM      NSF1     NSR/ACT
IEC  240      001      010      FAIL     -----
IEC  241      010      *        FAIL     -----

SR   ZONE    AREA    ID      NSF1     NSR/ACT
IEC  1        003     4       FAIL     -----
IEC  1        003     5       FAIL     -----

SR   NI      NC      NCM      NSF1     NSR/ACT
IEC  C        C       C        STOP     CR
SR   NPC
IEC  00235          NSF1     NSR
      FAIL     -----

SR   NI      NC      NCM      NSF1     NSR/ACT
WRD2 243      015     001     STOP     -----
WRD2 243      105     002     FAIL     -----
WRD2 C        C       C        STOP     -----
```

If a gateway screening stop action set is to be assigned to the blocked OPC screen being added to the database, go to step 4.

Step 4 verifies the gateway screening stop action set names in the database. The gateway screening stop action set names are assigned only if the NSFI of the screen being added in this procedure is STOP. If the NSFI of the new screen will be STOP, but a gateway screening stop action set name will not be assigned to the new screen, skip steps 4 and 5 and go to step 6. If the NSFI of the new screen is not STOP, skip step 4 and go to step 5.

4. Display the gateway screening stop action sets in the database with the `rtrv-gws-actset` command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
ACT ACT
ID NAME 1 2 3 4 5 6 7 8 9 10
--
1 copy copy
2 rdct rdct
3 cr copy rdct
4 cncf cncf
5 cpcncf copy cncf
6 cncfrd cncf rdct
7 cpcfrd copy cncf rdct

GWS action set table is (7 of 16) 44% full
```

If the required gateway screening stop action set is not in the database, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure to configure the required gateway screening stop action set.

NOTE: If the NSFI of the screen being added in this procedure is STOP or FAIL, skip step 5 and go to step 6.

5. Enter the commands in the [Verifying the Gateway Screening Configuration](#) section to verify that the screen that will be specified by the NSFI/NSR parameter combination in step 7 is in the database.

If the desired screen is not in the database, perform one of the procedures shown in the [Gateway Screening Configuration Procedures](#) section to add the desired screen to the database or change an existing screen in the database.

6. Display the status of the ITU National and International Spare Point Code Support feature by entering the `rtrv-ctrl-feat` command with the ITU National and International Spare Point Code Support feature part number.

NOTE: If the point code being added in this procedure is not an ITU-I or 14-bit ITU-N spare point code, skip this step and to step 7.

NOTE: If the point code being added in this procedure is an ITU-I or 14-bit ITU-N spare point code and the screening reference contains ITU-I or 14-bit ITU-N spare point codes, skip this step and go to step 7.

Enter this command.

```
rtrv-ctrl-feat:partnum=893013601
```

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
The following features have been permanently enabled:

Feature Name          Partnum  Status  Quantity
Spare Point Code Support 893013601 on      ----

The following features have been temporarily enabled:
```

```
Feature Name      Partnum  Status Quantity  Trial Period Left
Zero entries found.
```

The following features have expired temporary keys:

```
Feature Name      Partnum
Zero entries found.
```

If the ITU National and International Spare Point Code Support feature is enabled, go to step 7.

If the ITU National and International Spare Point Code Support feature is not enabled, perform the “Activating the ITU National and International Spare Point Code Support Feature” procedure in the *Database Administration Manual - SS7* to enable the ITU National and International Spare Point Code Support feature as required. After the feature has been enabled, go to step 7.

7. Add a new blocked OPC screen to the database using the **ent-scr-blkopc** command.

If a gateway screening stop action is to be assigned to the blocked OPC screen being changed, enter the **ent-scr-blkopc** command with the **nsfi=stop** parameter and the **actname** parameter with the name of a gateway screening stop action set shown in the output of the **rtrv-gws-actset** command executed in step 4. The following list contains the values for **ni**, **nc**, **ncm**, **zone**, **area**, **id**, **npc**, **msa**, **ssa**, and **sp** parameters:

- ni – 0 - 255, c, or an asterisk (*)
- nc – 0 - 255, c, or an asterisk (*)
- ncm – 0 - 255, c, or an asterisk (*)
- zone – 0 - 7, c, or an asterisk (*)
- area – 0 - 255, c, or an asterisk (*)
- id – 0 - 7, c, or an asterisk (*)
- npc – 1 - 16383, c, or an asterisk (*)
- msa – 0 - 255, c, or an asterisk (*)
- ssa – 0 - 255, c, or an asterisk (*)
- sp – 0 - 255, c, or an asterisk (*)

A range of values can be specified for the **ni**, **nc**, and **ncm** parameters. See the [“Specifying a Range of Values”](#) section for more information on how the asterisk and a range of values are used for the **ni**, **nc**, and **ncm** parameters.

To add a spare point code to the blocked OPC screen, the **pcst=s** parameter must be specified. To add a non-spare point code to the blocked OPC screen, the **pcst** parameter does not have to be specified. If the **pcst** parameter is specified for a screen containing an ITU-I or 14-bit ITU-N non-spare point code, the value must be **none**. The **pcst** parameter cannot be used with the **zone=c** or **npc=c** parameters.

For this example, enter these commands.

```
ent-scr-blkopc:sr=gws5:zone=c:area=c:id=c:nsfi=sio:nsr=iec
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:29:30 GMT EAGLE5 36.0.0
ENT-SCR-BLKOPC: SCREEN SET AFFECTED - GWS5 1% FULL
ENT-SCR-BLKOPC: MASP A - COMPLTD
```

```
ent-scr-blkopc:sr=gws5:zone=4:area=250:id=3:nsfi=fail
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:30:30 GMT EAGLE5 36.0.0
ENT-SCR-BLKOPC: SCREEN SET AFFECTED - GWS5 1% FULL
ENT-SCR-BLKOPC: MASP A - COMPLTD
```

ent-scr-blkopc:sr=gws3:ni=c:nc=c:ncm=c:nsfi=dpc:nsr=gws9

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:31:30 GMT EAGLE5 36.0.0
ENT-SCR-BLKOPC: SCREEN SET AFFECTED - GWS7 1% FULL
ENT-SCR-BLKOPC: MASP A - COMPLTD
```

ent-scr-blkopc:sr=gws3:ni=001:nc=002:ncm=002:nsfi=fail

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:32:30 GMT EAGLE5 36.0.0
ENT-SCR-BLKOPC: SCREEN SET AFFECTED - GWS7 1% FULL
ENT-SCR-BLKOPC: MASP A - COMPLTD
```

ent-scr-blkopc:sr=fld3:ni=c:nc=c:ncm=c:nsfi=sio:nsr=fld4

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:33:30 GMT EAGLE5 36.0.0
ENT-SCR-BLKOPC: SCREEN SET AFFECTED - FLD3 1% FULL
ENT-SCR-BLKOPC: MASP A - COMPLTD
```

ent-scr-blkopc:sr=fld3:ni=020:nc=020:ncm=020:nsfi=fail

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:34:30 GMT EAGLE5 36.0.0
ENT-SCR-BLKOPC: SCREEN SET AFFECTED - FLD3 1% FULL
ENT-SCR-BLKOPC: MASP A - COMPLTD
```

ent-scr-blkopc:sr=isp1:ni=c:nc=c:ncm=c:nsfi=sio:nsr=isp1

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:33:30 GMT EAGLE5 36.0.0
ENT-SCR-BLKOPC: SCREEN SET AFFECTED - ISP1 1% FULL
ENT-SCR-BLKOPC: MASP A - COMPLTD
```

ent-scr-blkopc:sr=isp1:ni=025:nc=025:ncm=025:nsfi=fail

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:34:30 GMT EAGLE5 36.0.0
ENT-SCR-BLKOPC: SCREEN SET AFFECTED - ISP1 1% FULL
ENT-SCR-BLKOPC: MASP A - COMPLTD
```

8. Verify the changes using the **rtrv-scr-blkopc** command with the screening reference name used in step 7. For this example, enter these commands.

rtrv-scr-blkopc:sr=gws5

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:35:30 GMT EAGLE5 36.0.0
SCREEN = BLOCKED OPC
```

SR	ZONE	AREA	ID	NSFI	NSR/ACT
GWS5	4	250	3	FAIL	-----
GWS5	C	C	C	SIO	IEC

rtrv-scr-blkopc:sr=gws3

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = BLOCKED OPC
SR  NI      NC      NCM      NSFI     NSR/ACT
GWS3 002     002     002     FAIL     -----
GWS3 C       C       C       DPC     GWS9
```

rtrv-scr-blkopc:sr=fld3

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:36:30 GMT EAGLE5 36.0.0
SCREEN = BLOCKED OPC
SR  NI      NC      NCM      NSFI     NSR/ACT
FLD3 020     020     020     FAIL     -----
FLD3 C       C       C       DPC     FLD4
```

rtrv-scr-blkopc:sr=isp1

The following is an example of the possible output.


```
rlghncxa03w 06-10-25 15:36:30 GMT EAGLE5 36.0.0
SCREEN = BLOCKED OPC
SR  NI      NC      NCM      NSFI     NSR/ACT
ISP1 025     025     025     FAIL     -----
ISP1 C       C       C       SIO     ISP1
```


9. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 11-2. Adding a Blocked OPC Screen

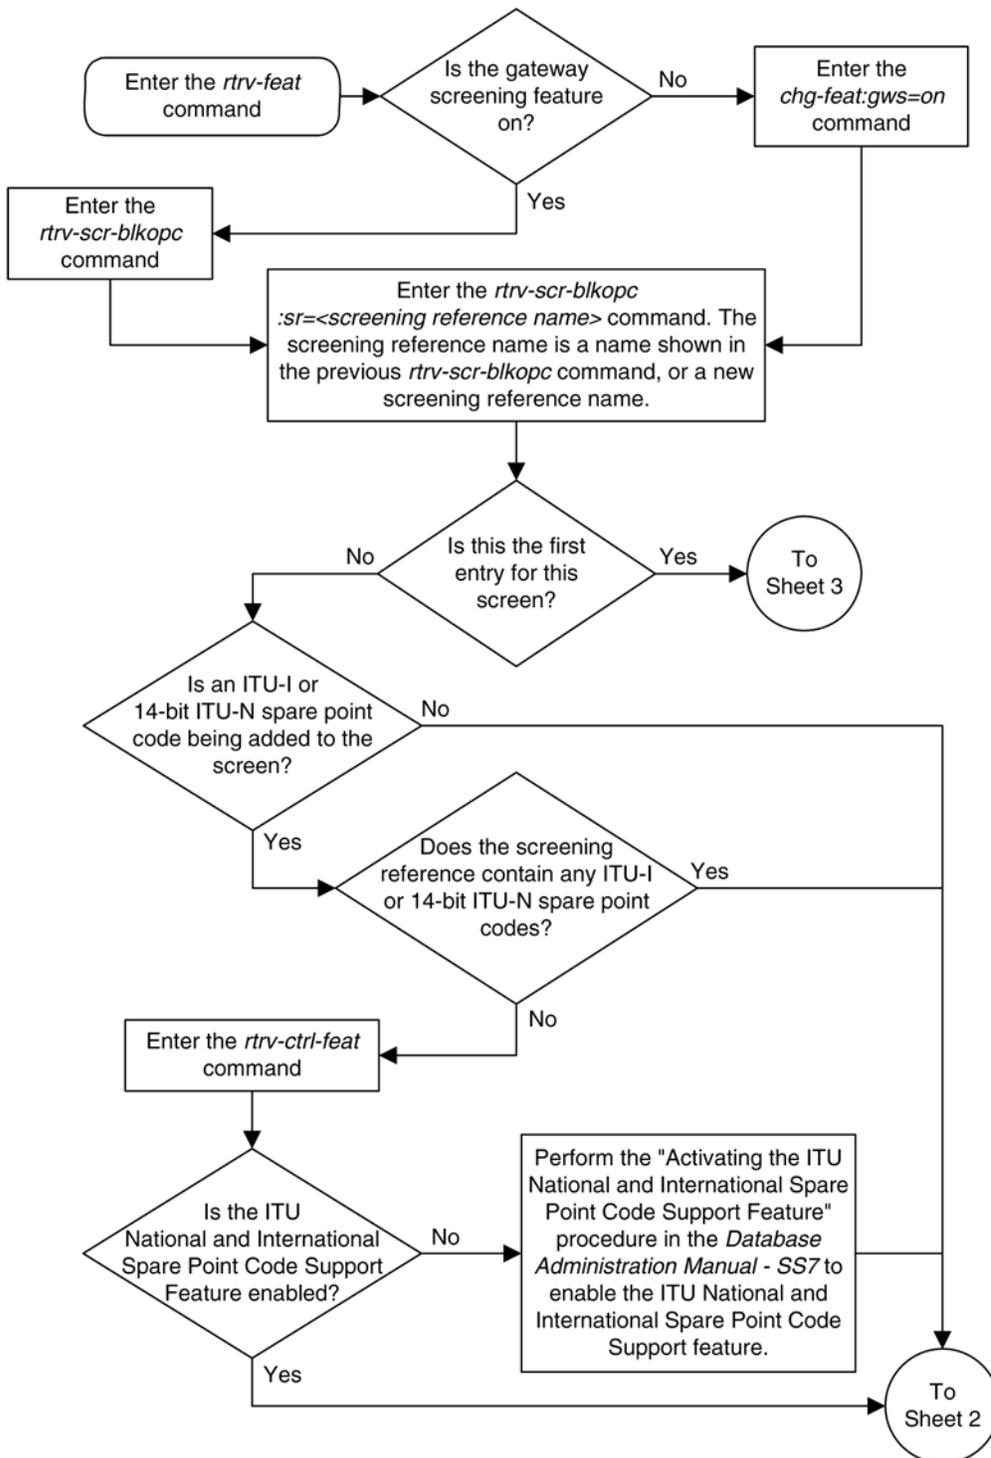

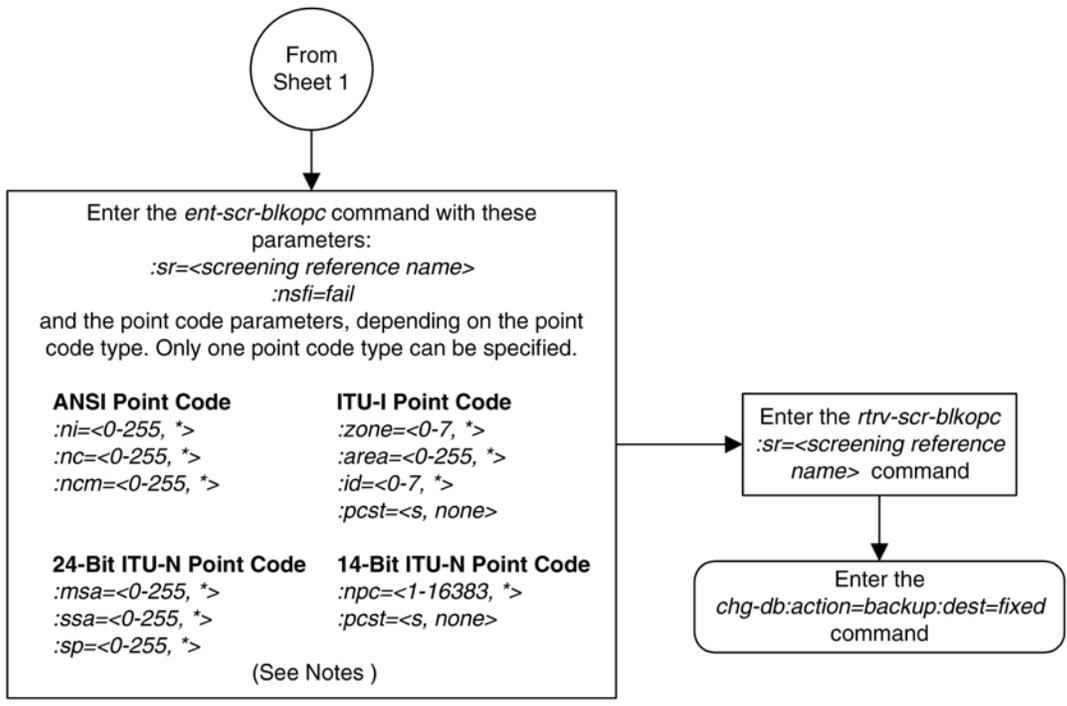



Notes:


1. A range of values can be specified for the *ni*, *nc*, or *ncm* parameters by inserting double ampersands (&&) between the parameter values defining the range. For example, to specify the range 025 to 200 for the *ni* parameter, enter 025&&200 for the *ni* parameter value.
2. The asterisk (*) specifies the entire range of values for that parameter.

For more information about specifying a range of values and about using the asterisk, see the "Gateway Screening Attributes" section in Chapter 2 and the "Specifying a Range of Values" section in this procedure.

3. To add a non-spare point code, the *pcst* parameter does not have to be specified. If the *pcst* parameter is specified for a screen containing an ITU-I or 14-bit ITU-N non-spare point code, the value must be *none*.
4. To add a spare point code, the *pcst=s* parameter must be specified.

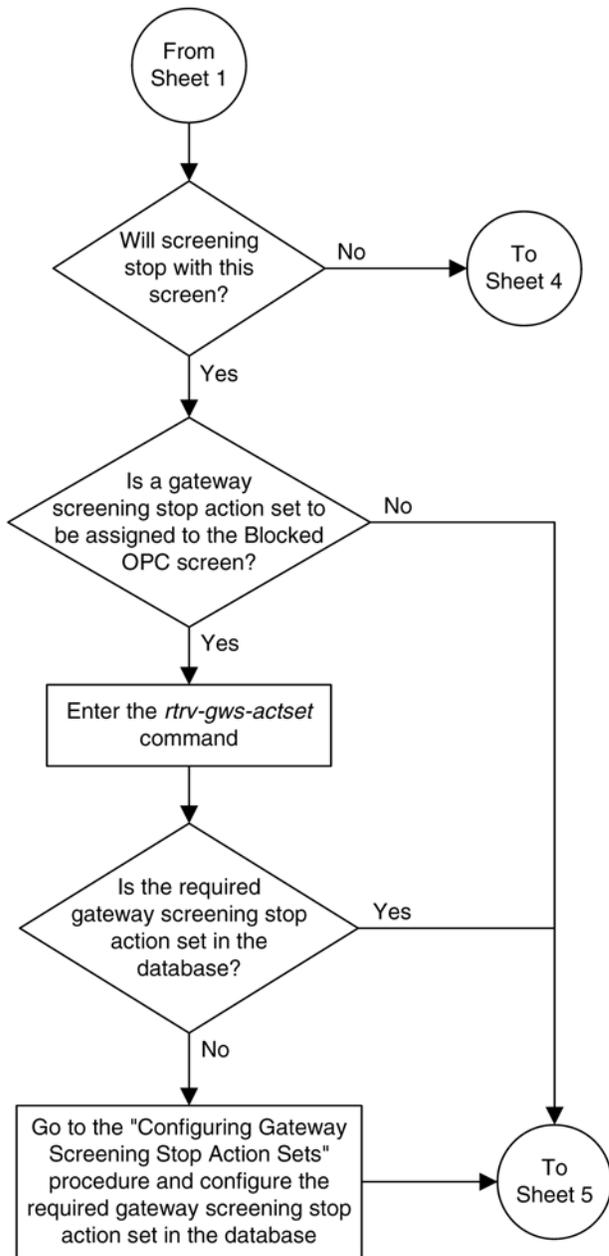

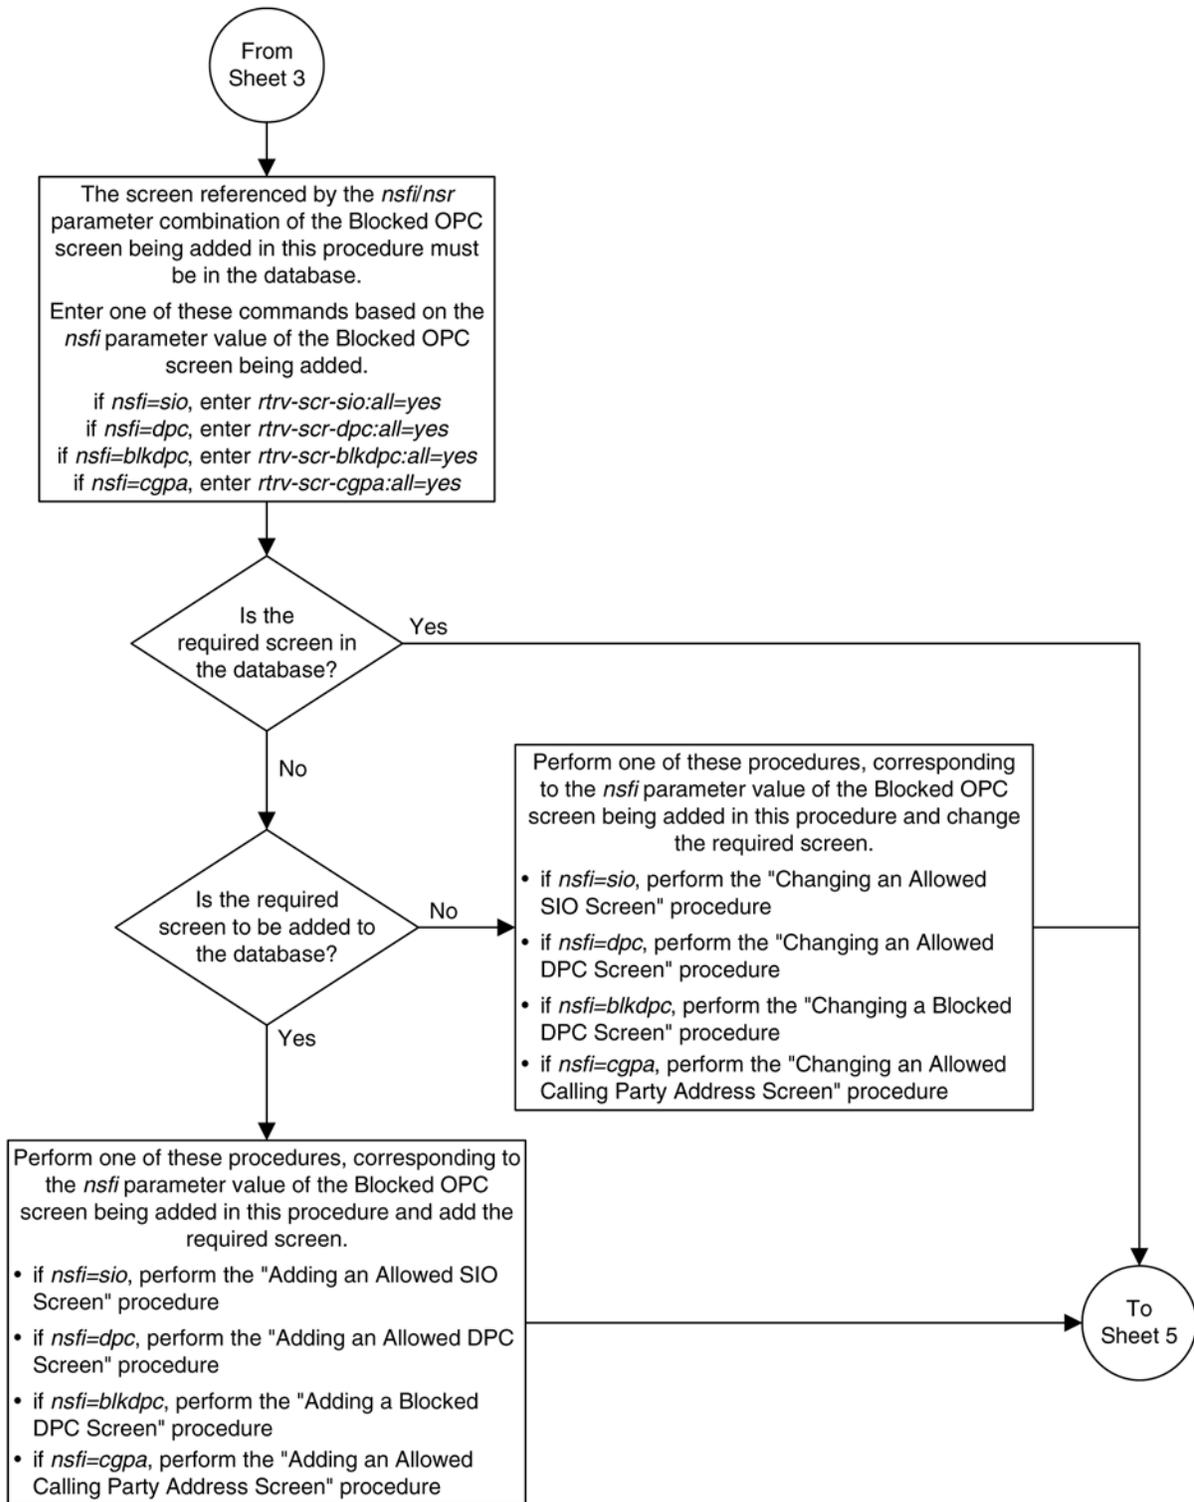

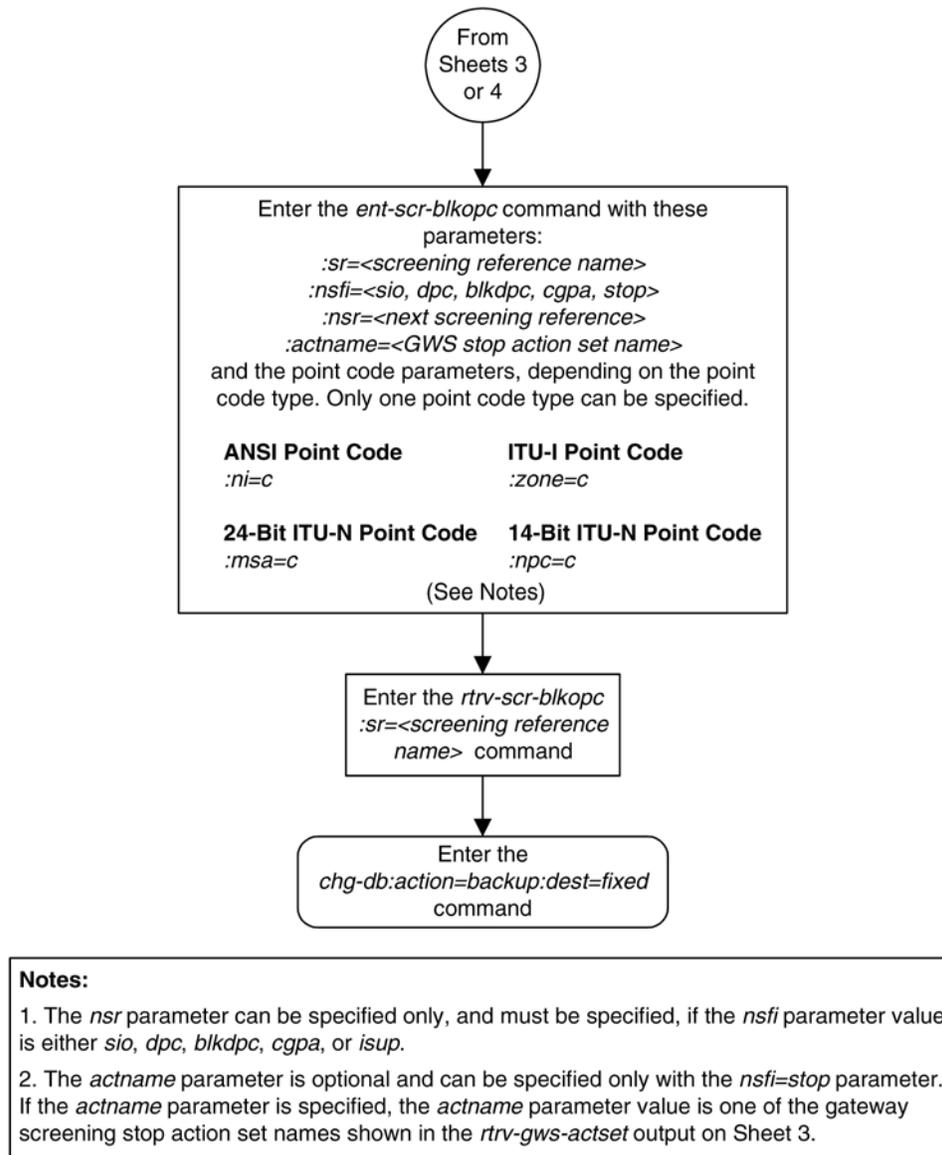

Removing a Blocked OPC Screen

This procedure is used to remove a blocked originating point code (OPC) screen from the database using the **dlt-scr-blkopc** command. The parameters used by the **dlt-scr-blkopc** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The example in this procedure removes the blocked OPC screen **iec** with the point code 240-001-010 from the database.

NOTE: If you using multiple-part ITU national point codes with gateway screening, see the [14-Bit ITU National Point Code Formats](#) section.

The **c-c-c** entry cannot be removed from the blocked OPC screen unless all other entries in the blocked OPC screen have been removed. The **c-c-c** entry cannot be removed from the blocked OPC screen if other screens reference the blocked OPC screen. If the last entry (**c-c-c**) in the blocked OPC screen is removed, the blocked OPC screen is removed. The blocked OPC screen can be referenced by one of the following screens.

- Screen Set
- Allowed OPC

Verifying the Gateway Screening Configuration

Enter the following commands to verify that none of these screens reference the blocked OPC screen being removed from the database.

- **rtrv-scrset:nsfi=blkopc**
- **rtrv-scr-opc:nsfi=blkopc**

Gateway Screening Configuration Procedures

To change the NSFI of any of these screens, perform one of these procedures.

- [Changing a Screen Set](#)
- [Changing an Allowed OPC Screen](#)

Procedure

1. Display the blocked OPC screens in the database using the **rtrv-scr-blkopc** command.

The following is an example of the possible output.

```
r1ghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = BLOCKED DPC

SR  REF  RULES
IEC  YES   6
ISP1 YES   2
WRD2 YES   2
WRD3 NO    4
WRD4 YES   9
```

From the **rtrv-scr-blkopc** output, display the blocked OPC screen you wish to remove using the **rtrv-scr-blkopc** command with the screening reference name. For this example, enter this command.

```
rtrv-scr-blkopc:sr=iec
```

The following is an example of the possible output.

```
r1ghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = BLOCKED OPC

SR  NI      NC      NCM      NSFI      NSR/ACT
IEC  240     001     010     FAIL     -----
IEC  241     010     *       FAIL     -----
SR  ZONE   AREA   ID      NSFI      NSR/ACT
IEC  1      003    4       FAIL     -----
IEC  1      003    5       FAIL     -----
SR  NI      NC      NCM      NSFI      NSR/ACT
IEC  C       C       C       CGPA     cg01
SR  NPC
IEC  00235      FAIL     -----
```

2. Enter the commands in the [Verifying the Gateway Screening Configuration](#) section to verify that the screen being removed is not referenced by other screens in the database.

If the screen being removed is referenced by other screens, perform the procedures shown in the [Gateway Screening Configuration Procedures](#) section to change the NSFI of those screens to reference other screens or change the NSFI of these screens to STOP.

3. Remove the blocked OPC screen from the database using the **dlt-scr-blkopc** command with the screening reference name shown in the **rtrv-scr-blkopc** output in step 1 and with the point code parameter values (**ni**, **nc**, **ncm**, or **zone**, **area**, **id**, or **npc**, **msa**, **ssa**, **sp**) of the screen being removed from the database.

The values for these parameters must be entered exactly as shown in the **rtrv-scr-blkopc** output.

To remove an entry containing either an ITU-I or a 14-bit ITU-N spare point code, the **pcst=s** parameter must be specified with the **dlt-scr-blkopc** command.

To remove an entry containing either an ITU-I or a 14-bit ITU-N non-spare point code, the **pcst** parameter does not have to be specified with the **dlt-scr-blkopc** command. If the **pcst** parameter is specified, the value must be **none**.

The **pcst** parameter cannot be used with the **zone=c** or the **npc=c** parameters.

For this example, enter this command.

```
dlt-scr-blkopc:sr=iec:ni=240:nc=001:ncm=010
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
DLT-SCR-BLKOPC: SCREEN SET AFFECTED - IEC 2% FULL
DLT-SCR-BLKOPC: MASP A - COMPLTD
```

4. Verify the changes using the **rtrv-scr-blkopc** command with the screening reference name used in step 3.

For this example, enter this command.

```
rtrv-scr-blkopc:sr=iec
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
SCREEN = BLOCKED OPC
SR  NI      NC      NCM      NSFI     NSR/ACT
IEC 241     010     *        FAIL     -----
SR   ZONE    AREA    ID       NSFI     NSR/ACT
IEC  1      003     4        FAIL     -----
IEC  1      003     5        FAIL     -----
SR  NI      NC      NCM      NSFI     NSR/ACT
IEC  C      C      C        CGPA     cg01
SR   NPC
IEC  00235          NSFI     NSR
IEC                                FAIL     -----
```

If the screen removed in step 3 was the last screen contained in the specified screening reference, the screening reference is removed from the database. The following message is displayed.


```
E2573 Cmd Rej: SR or NSR does not reference an existing SR
```

5. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.  
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.  
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.  
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 11-3. Removing a Blocked OPC Screen

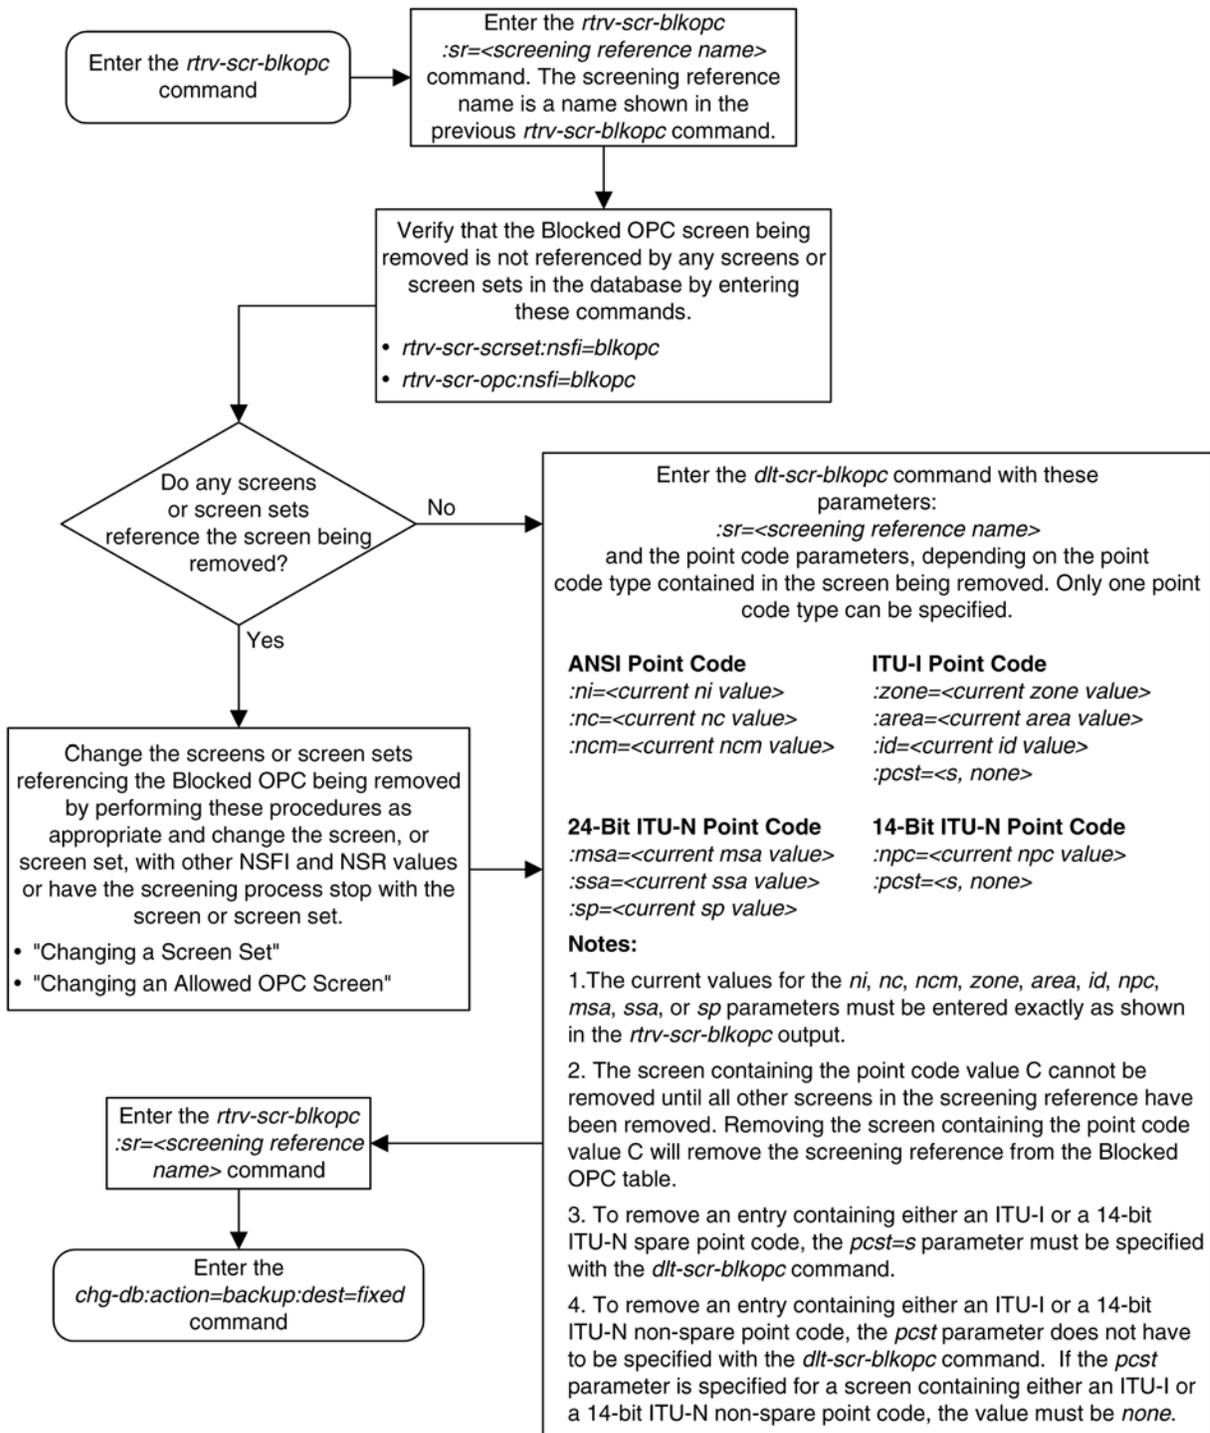

Changing a Blocked OPC Screen

This procedure is used to change the attributes of a blocked originating point code (OPC) screen in the database using the **chg-scr-blkopc** command. The parameters used by the **chg-scr-blkopc** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The example in this procedure is used to change the point code 002-002-002 for the blocked OPC screen **gws7** to 230-230-230.

NOTE: If you using multiple-part ITU national point codes with gateway screening, [14-Bit ITU National Point Code Formats](#) section.

If the current **ni**, **nc**, and **ncm** are equal to the character " **c** ", only the next screening function identifier and next screening reference can be changed. The next screening function identifier cannot be equal to **fail**. If the next screening function identifier is not equal to **stop**, the next screening reference must be specified. Otherwise, only the point code can be changed.

The blocked OPC screen can reference one of the following screens.

- Allowed SIO
- Allowed DPC
- Blocked DPC
- Allowed CGPA

Verifying the Gateway Screening Configuration

Enter the following commands to verify that these screens are in the database.

- **rtrv-scr-sio:all=yes**
- **rtrv-scr-dpc:all=yes**
- **rtrv-scr-blkdpc:all=yes**
- **rtrv-scr-cgpa:all=yes**

Gateway Screening Configuration Procedures

If the desired screen is not in the database, perform one of these procedures to add the desired screen to the database.

- [Adding an Allowed SIO Screen](#)
- [Adding an Allowed DPC Screen](#)
- [Adding a Blocked DPC Screen](#)
- [Adding an Allowed Calling Party Address Screen](#)
- [Changing an Allowed SIO Screen](#)
- [Changing an Allowed DPC Screen](#)
- [Changing a Blocked DPC Screen](#)
- [Changing an Allowed Calling Party Address Screen](#)

For the first entry for a specific screening reference, the value for the point code must be **c**, and the NSFI must be either **stop**, **sio**, **dpc**, **blkdpc**, or **cgpa**. If the NSFI is **stop**, the screening of the message will stop at the specified blocked OPC screen. If the NSFI is either **sio**, **dpc**, **blkdpc**, or **cgpa**, then any message containing

a point code that is not listed in the blocked OPC screen with a NSFI equal to **fail**, will continue to be screened with either the allowed SIO, allowed DPC, blocked DPC, or the allowed CGPA screen.

All subsequent entries for that screening reference must contain a numeric point code value, the NSFI must be equal to **fail**, and the **nsr** parameter cannot be specified. Any message that contains an OPC in the blocked OPC screen with the NSFI equal to **fail** will be rejected from the network and the screening process is stopped.

The **pcst** or **npcst** parameters, specifying whether or not the ITU-I or 14-bit ITU-N point code is a spare point code, cannot be used with the **zone=c** or **npc=c** parameters.

Specifying a Range of Values

A range of values can be specified for the point code parameters **ni**, **nc**, or **ncm**.

If a range of values is specified for any of these parameters, and the value of the other parameters match existing values for the screening reference name, the range of values for the point code parameter cannot include any values for that parameter that are currently provisioned for the screening reference name.

For example, screening reference name **scr1** contains these entries:

SR	NI	NC	NCM	NSFI	NSR/ACT
SCR1	240	001	010	FAIL	-----
SCR1	241	010	020	FAIL	-----

Another entry for screening reference **scr1** with the **ni** value of 240 and the **nc** value of 001 cannot be specified if the range of values for the **ncm** parameter includes the value 010.

The ANSI point code parameter values can be specified as a single value, a range of values, or with an asterisk (*). The asterisk specifies all possible values for the **ni**, **nc**, and **ncm** parameters. [Table 11-5](#) shows the valid combinations of these parameter values.

Table 11-5. Valid Value Combinations for ANSI Point Code Parameters

NI	NC	NCM
Single Value	Single Value	Single Value
Single Value	Single Value	Range of Values
Single Value	Single Value	Asterisk
Single Value	Range of Values	Asterisk
Single Value	Asterisk	Asterisk
Range of Values	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

A range of values can also be specified for an ITU-I or 24-bit ITU-N point code parameter using a combination of asterisks (*) and single values for the point code parameters. [Table 11-6](#) shows the valid combinations of the ITU-I parameter values. [Table 11-7](#) shows the valid combinations of the 24-bit ITU-N parameter values.

Table 11-6. Valid Value Combinations for ITU-I Point Code Parameters

ZONE	AREA	ID
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Table 11-7. Valid Value Combinations for 24-Bit ITU-N Point Code Parameters

MSA	SSA	SP
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Procedure

1. Display the blocked OPC screens in the database using the **rtrv-scr-blkopc** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = BLOCKED OPC
SR  REF  RULES
GWS7 YES   2
IEC  YES   6
ISP1 YES   2
WRD2 YES   2
WRD3 NO    4
WRD4 YES  10
```

From the **rtrv-scr-blkopc** output, display the blocked OPC screen you wish to change using the **rtrv-scr-blkopc** command with the screening reference name. For this example, enter this command.

```
rtrv-scr-blkopc:sr=gws7
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = BLOCKED OPC
SR  NI      NC      NCM      NSF1     NSR/ACT
GWS7 002     002     002     FAIL     -----
GWS7 C       C       C       DPC     GWS9
```

If a gateway screening stop action set is to be assigned to the blocked OPC screen being changed in the database, go to step 2.

Step 2 verifies the gateway screening stop action set names in the database. The gateway screening stop action set names are assigned only if the NSF1 of the screen being changed in this procedure is STOP. If the NSF1 of the screen will be changed to STOP, but a gateway screening stop action set name will not be

assigned to the screen, skip steps 2 and 3 and go to step 4. If the NSFI of the screen will not be STOP, skip step 2 and go to step 3.

2. Display the gateway screening stop action sets in the database with the `rtrv-gws-actset` command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
ACT ACT
ID NAME 1 2 3 4 5 6 7 8 9 10
--
1 copy copy
2 rdct rdct
3 cr copy rdct
4 cncf cncf
5 cpcncf copy cncf
6 cncfrd cncf rdct
7 cpcfrd copy cncf rdct
```

GWS action set table is (7 of 16) 44% full

If the required gateway screening stop action set is not in the database, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure to configure the required gateway screening stop action set.

NOTE: If the NSFI of the screen being changed in this procedure will be STOP or FAIL, or if the NSFI of the screen is not being changed, skip step 3 and go to step 4.

3. Enter the commands in the [Verifying the Gateway Screening Configuration](#) section to verify that the screen that will be specified by the NSFI/NSR parameter combination in step 5 is in the database.

If the desired screen is not in the database, perform one of the procedures shown in the [Gateway Screening Configuration Procedures](#) section to add the desired screen to the database or change an existing screen in the database.

NOTE: If any of these conditions apply to this procedure, skip this step and go to step 5:

- The point code in the screen is not being changed.
- The screen being changed contains either an ANSI or 24-bit ITU-N point code.
- The ITU-I or 14-bit ITU-N non-spare point code in the screen is not being changed to an ITU-I or 14-bit ITU-N spare point code.
- The point code in the screen is an ITU-I or 14-bit ITU-N spare point code or the screening reference contains other screens with ITU-I or 14-bit ITU-N spare point codes.

4. Display the status of the ITU National and International Spare Point Code Support feature by entering the `rtrv-ctrl-feat` command with the ITU National and International Spare Point Code Support feature part number.

Enter this command.

```
rtrv-ctrl-feat:partnum=893013601
```

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
The following features have been permanently enabled:

Feature Name          Partnum   Status  Quantity
Spare Point Code Support 893013601 on      ----

The following features have been temporarily enabled:
```

```
Feature Name      Partnum  Status Quantity  Trial Period Left
Zero entries found.
```

The following features have expired temporary keys:

```
Feature Name      Partnum
Zero entries found.
```

If the ITU National and International Spare Point Code Support feature is enabled, go to step 5.

If the ITU National and International Spare Point Code Support feature is not enabled, perform the “Activating the ITU National and International Spare Point Code Support Feature” procedure in the *Database Administration Manual - SS7* to enable the ITU National and International Spare Point Code Support feature as required. After the feature has been enabled, go to step 5.

5. Change the attributes of the blocked OPC screen using the **chg-scr-blkopc** command.

If a gateway screening stop action is to be assigned to the blocked OPC screen being changed, enter the **chg-scr-blkopc** command with the **nsfi=stop** parameter and the **actname** parameter with the name of a gateway screening stop action set shown in the output of the **rtrv-gws-actset** command executed in step 2.

The current values for the **ni**, **nc**, **ncm**, **zone**, **area**, **id**, **npc**, **msa**, **ssa**, and **sp** parameters must be entered exactly as shown in the **rtrv-scr-blkopc** output in step 1.

The following list contains the values for the **nni**, **nnc**, **nncm**, **nzone**, **narea**, **nid**, **nnpc**, **nmsa**, **nssa**, and **nsp** parameters:

- **nni** – 0 - 255, c, or an asterisk (*)
- **nnc** – 0 - 255, c, or an asterisk (*)
- **nncm** – 0 - 255, c, or an asterisk (*)
- **nzone** – 0 - 7, c, or an asterisk (*)
- **narea** – 0 - 255, c, or an asterisk (*)
- **nid** – 0 - 7, c, or an asterisk (*)
- **nnpc** – 1 - 16383, c, or an asterisk (*)
- **nmsa** – 0 - 255, c, or an asterisk (*)
- **nssa** – 0 - 255, c, or an asterisk (*)
- **nsp** – 0 - 255, c, or an asterisk (*)

A range of values can be specified for the **nni**, **nnc**, and **nncm** parameters. See the [“Specifying a Range of Values”](#) section for more information on how the asterisk and a range of values are used for the **nni**, **nnc**, and **nncm** parameters.

To change an ITU-I or 14-bit ITU-N spare point code to a non-spare point code, both the **pcst=s** and **npcst=none** parameters must be specified with the **chg-scr-blkopc** command.

To change an ITU-I or 14-bit ITU-N non-spare point code to a spare point code, the **npcst=s** parameter must be specified with the **chg-scr-blkopc** command. The **pcst** parameter does not have to be specified.

If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N spare point code, the **pcst=s** parameter must be specified with the **chg-scr-blkopc** command.

If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N non-spare point code, the **pcst** parameter does not have to be specified with the **chg-scr-blkopc** command. If the

pcst parameter is specified for a screen containing either an ITU-I or 14-bit ITU-N non-spare point code, the **pcst** parameter value must be **none**.

The **pcst** or **npcst** parameters cannot be used with the **zone=c** or **npc=c** parameters.

For this example, enter this command.

```
chg-scr-blkopc:sr=gws7:ni=002:nc=002:ncm=002:nni=230:nnc=230 :nncm=230
```

The following messages appear.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
CHG-SCR-BLKOPC: SCREEN SET AFFECTED - GWS7 1% FULL
CHG-SCR-BLKOPC: MASP A - COMPLTD
```

NOTE: Verify the changes using the `rtrv-scr-blkopc` command with the screening reference name used in step 5. For this example, enter this command.

```
rtrv-scr-blkopc:sr=gws7
```

The following is an example of the possible output.


```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
SCREEN = BLOCKED OPC
SR   NI       NC       NCM       NSF1    NSR/ACT
GWS7 230      230      230      FAIL    -----
GWS7 C        C        C        DPC     GWS9
```


6. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 11-4. Changing a Blocked OPC Screen

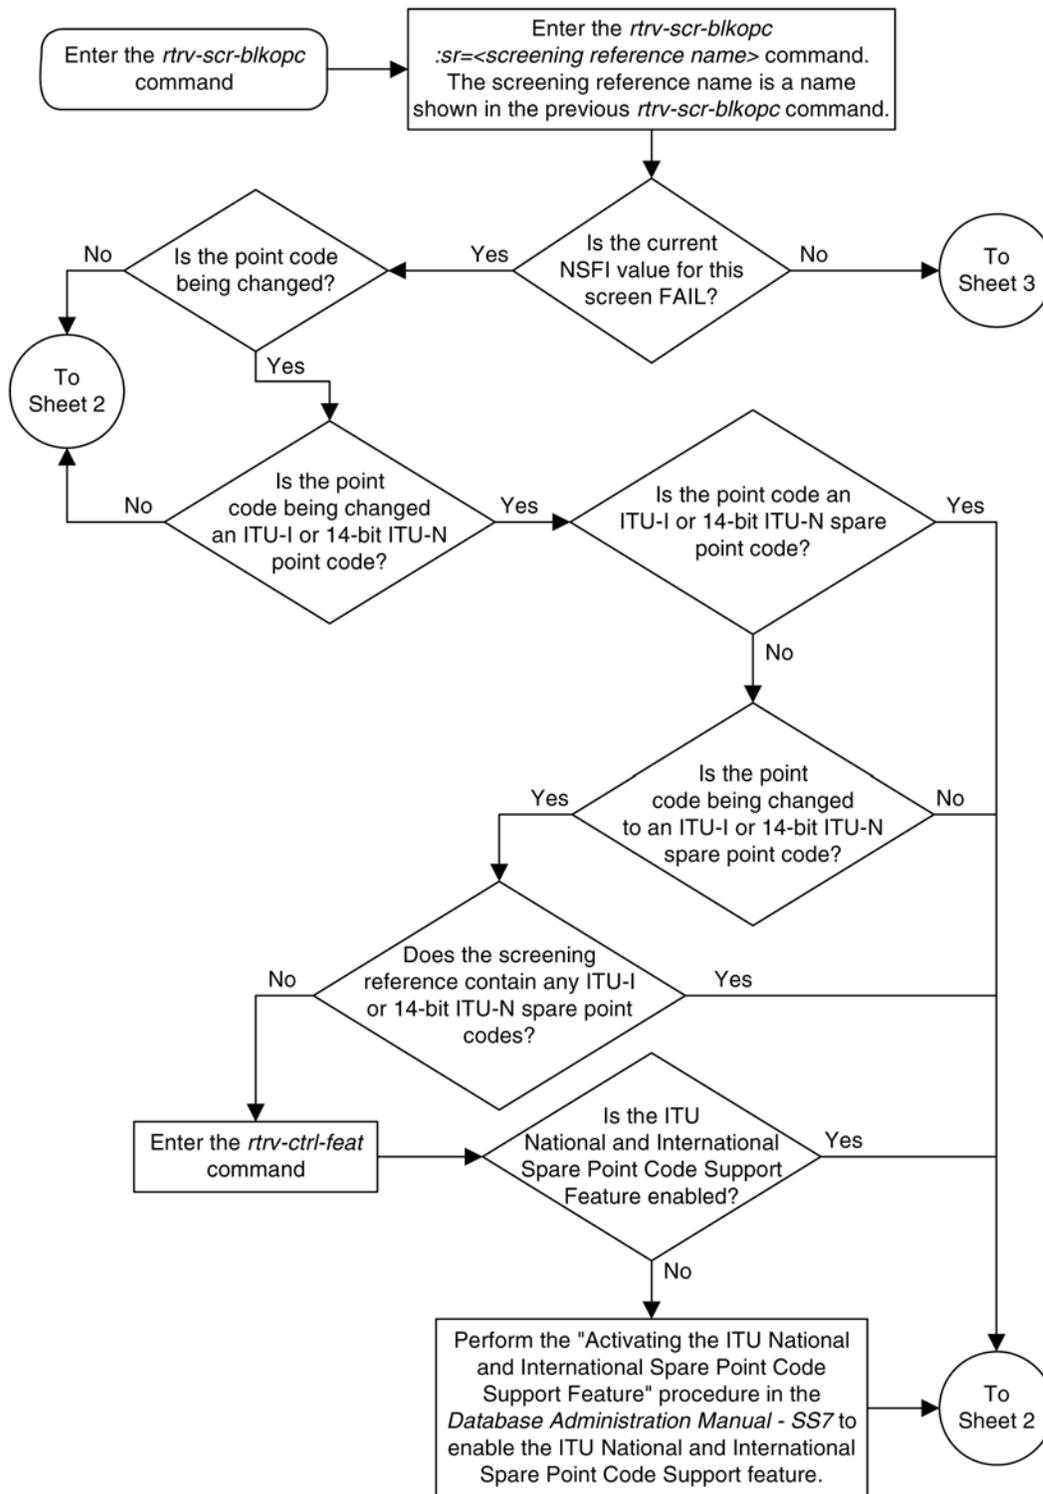



Enter the *chg-scr-blkopc* command with this mandatory parameter:
:sr=<screening reference name>
 and the point code parameters, depending on the point code type contained in the screen being changed. Only one point code type can be specified.

ANSI Point Code	ITU-I Point Code	14-Bit ITU-N Point Code	24-Bit ITU-N Point Code
<i>:ni=<current ni value></i>	<i>:zone=<current zone value></i>	<i>:npc=<current npc value></i>	<i>:msa=<current msa value></i>
<i>:nc=<current nc value></i>	<i>:area=<current area value></i>	<i>:pcst=<s, none></i>	<i>:ssa=<current ssa value></i>
<i>:ncm=<current ncm value></i>	<i>:id=<current id value></i>		<i>:sp=<current sp value></i>
	<i>:pcst=<s, none></i>		

At least one of these optional point code parameters must be specified with the *chg-scr-blkopc* command.


ANSI Point Code	ITU-I Point Code	14-Bit ITU-N Point Code	24-Bit ITU-N Point Code
<i>:nni=<0-255, *></i>	<i>:nzone=<0-7, *></i>	<i>:nnpc=<1-16383, *></i>	<i>:nmsa=<0-255, *></i>
<i>:nnc=<0-255, *></i>	<i>:narea=<0-255, *></i>	<i>:npcst=<s, none></i>	<i>:nssa=<0-255, *></i>
<i>:nncm=<0-255, *></i>	<i>:nid=<0-7, *></i>		<i>:nsp=<0-255, *></i>
	<i>:npcst=<s, none></i>		


The new point code code parameters must be of the same type as the current point code values specified in the *chg-scr-blkopc* command
 (See Notes)


Enter the *rtv-scr-blkopc*
:sr=<screening reference name> command

Enter the *chg-db:action=backup:dest=fixed* command

- Notes:**
1. A range of values can be specified for the *nni*, *nnc*, or *nncm* parameters by inserting double ampersands (&&) between the parameter values defining the range. For example, to specify the range 025 to 200 for the *nni* parameter, enter 025&&200 for the *nni* parameter value.
 2. The current values for the *ni*, *nc*, *ncm*, *zone*, *area*, *id*, *npc*, *msa*, *ssa*, or *sp* parameters must be entered exactly as shown in the *rtv-scr-blkopc* output. The current point code value cannot be C.
 3. The asterisk (*) specifies the entire range of values for that parameter.
- For more information about specifying a range of values and about using the asterisk, see the "Gateway Screening Attributes" section in Chapter 2 and the "Specifying a Range of Values" section in this procedure.
4. To change an ITU-I or 14-bit ITU-N spare point code to a non-spare point code, both the *pcst=s* and *npcst=none* parameters must be specified with the *chg-scr-blkopc* command.
 5. To change an ITU-I or 14-bit ITU-N non-spare point code to a spare point code, the *npcst=s* parameter must be specified with the *chg-scr-blkopc* command. The *pcst* parameter does not have to be specified.
 6. If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N spare point code, the *pcst=s* parameter must be specified with the *chg-scr-blkopc* command.
 7. If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N non-spare point code, the *pcst* parameter does not have to be specified with the *chg-scr-blkopc* command. If the *pcst* parameter is specified for a screen containing either an ITU-I or 14-bit ITU-N non-spare point code, the *pcst* parameter value must be *none*.

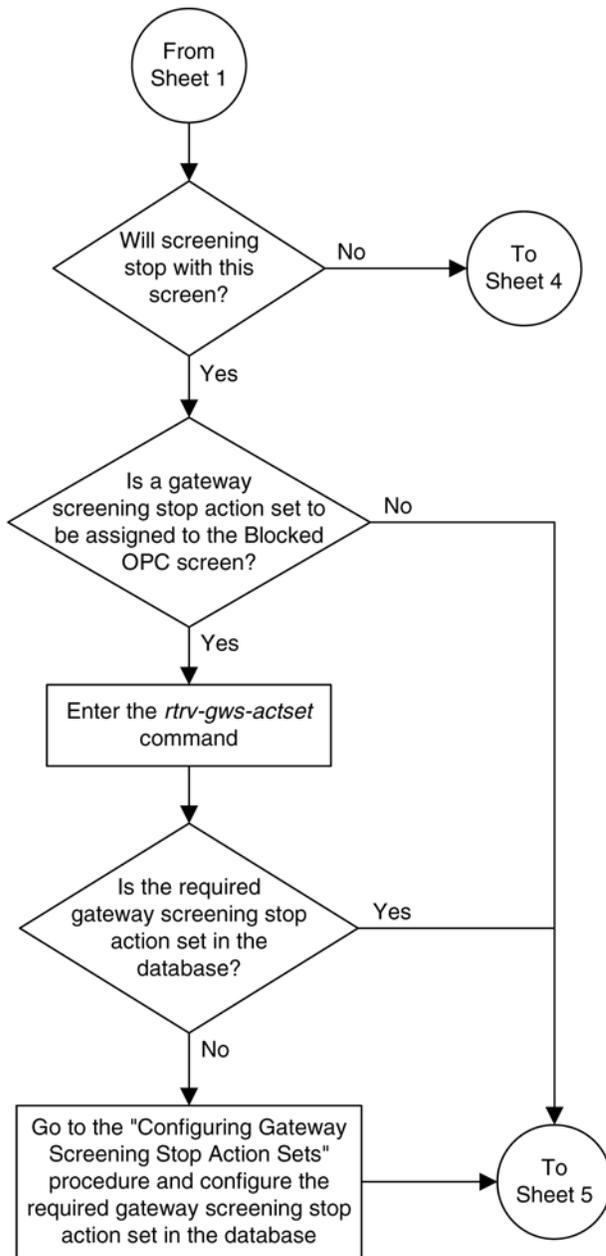

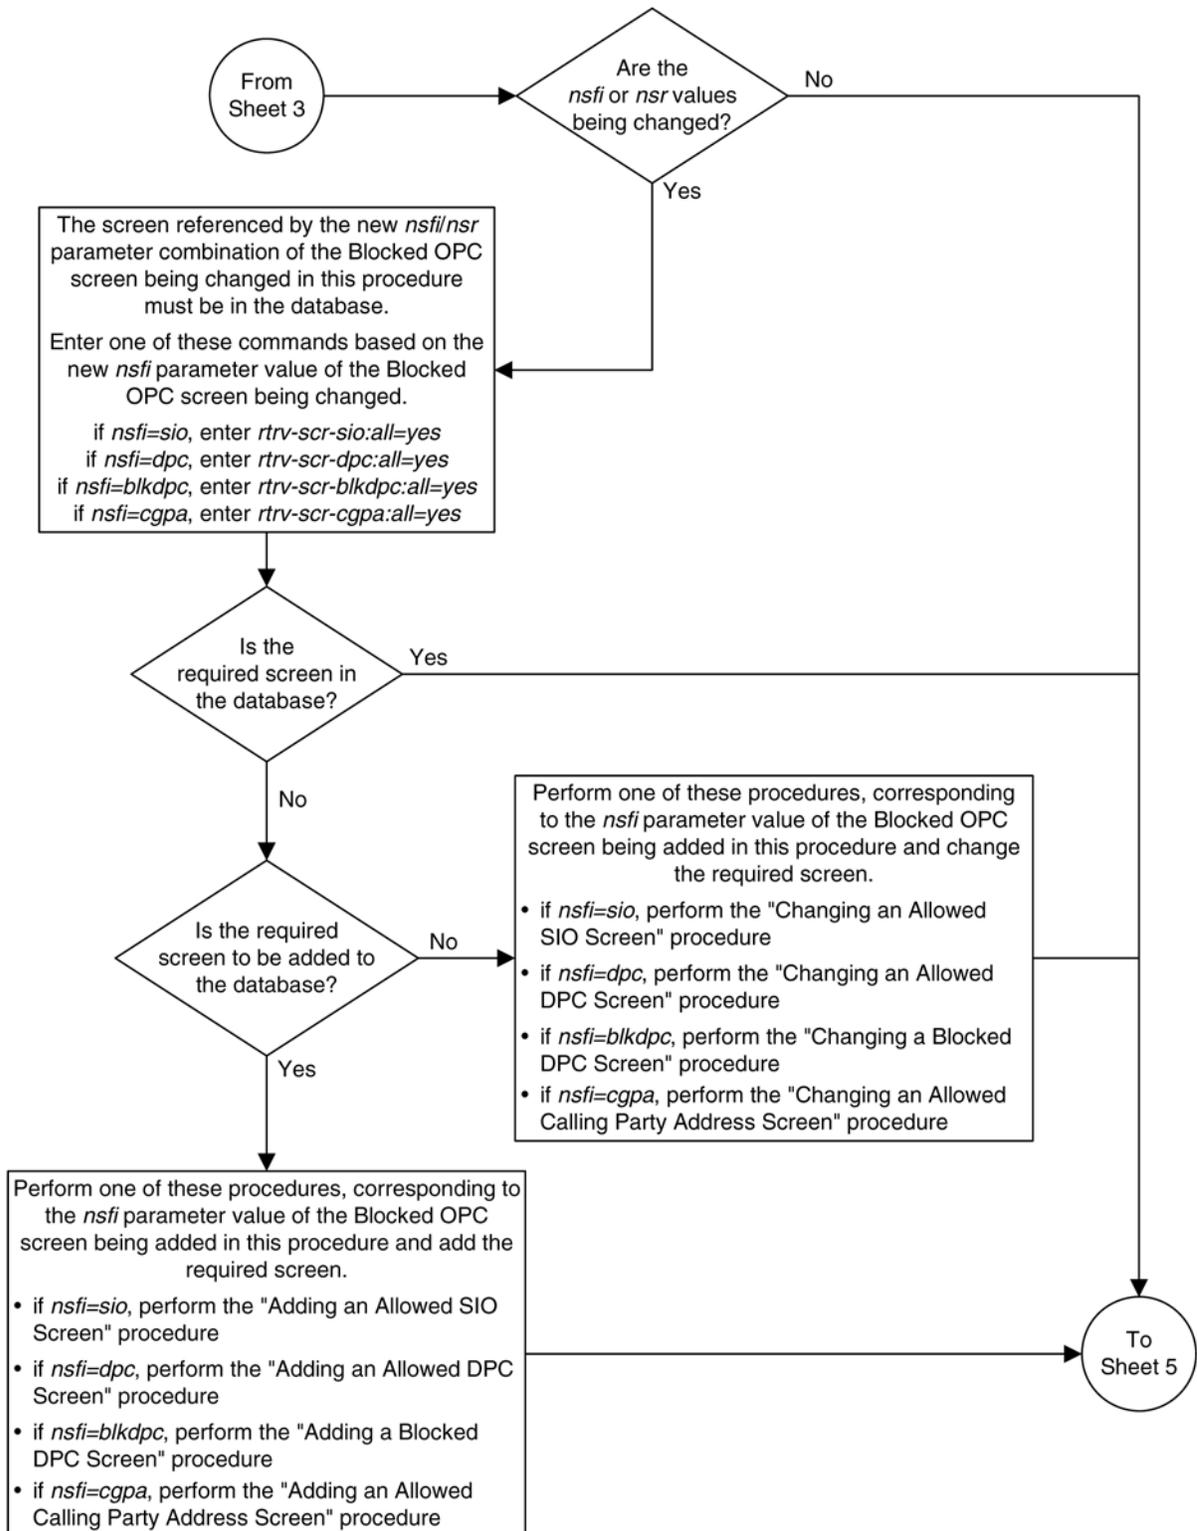

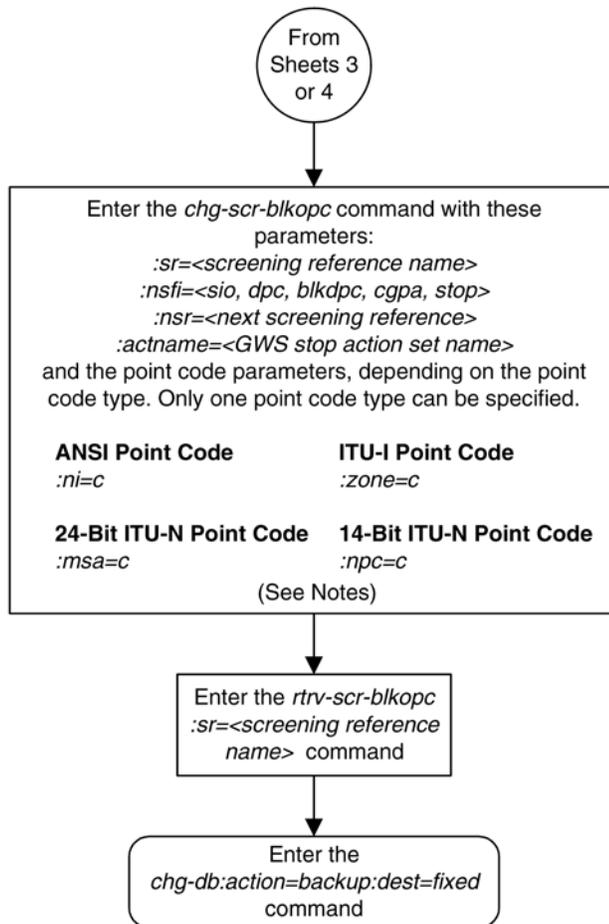

Notes:

1. The *nsr* parameter can be specified only, and must be specified, if the *nsfi* parameter value is either *sio*, *dpc*, *blkdpc*, or *cgpa*.
2. The *actname* parameter is optional and can be specified only with the *nsfi=stop* parameter. If the *actname* parameter is specified, the *actname* parameter value is one of the gateway screening stop action set names shown in the *rtv-gws-actset* output on Sheet 3.

Allowed Originating Point Code (OPC) Screen Configuration

Introduction	12-1
Adding an Allowed OPC Screen	12-7
Removing an Allowed OPC Screen	12-19
Changing an Allowed OPC Screen	12-22

Introduction

The allowed originating point code (OPC) screen identifies a set of OPC's that are allowed to send SS7 messages into the network. The gray shaded areas in [Figure 12-1](#) shows the fields of the SS7 message that are checked by the allowed OPC screening function. If a match is found, the **nsfi** is examined to determine the next step in the screening process. If the **nsfi** is equal to **stop**, the message is processed and no further screening takes place.

If the **nsfi** is equal to **stop**, and the **copy** gateway screening stop action is specified, the message is processed and a copy of the message is sent by the STPLAN feature to an external application.

If the **nsfi** is equal to **stop**, and the **rdct** (redirect) gateway screening stop action is specified, the message is diverted from the original destination and sent to another destination with the Database Transport Access feature, specified by global title translation, for further processing.

If the Calling Name Conversion Facility (CNCF) feature is on, the **nsfi** is equal to **stop**, and the **cncf** gateway screening stop action is specified, the PIP parameter in the incoming ISUP IAM message is converted to the GN parameter. The GN parameter in the incoming ISUP IAM message is converted to the PIP parameter. The message is then sent to the node specified by the DPC in the routing label in the message. For more information on the Calling Name Conversion Facility feature, see [Chapter 14 Calling Name Conversion Facility \(CNCF\) Configuration](#).

If the Triggerless LNP (TLNP) feature is on, the **nsfi** is equal to **stop**, and the **tlnp** gateway screening stop action is specified, ISUP IAMs that pass gateway screening are processed either by the ISUP NP with EPAP feature (if the ISUP NP with EPAP feature is enabled and turned on) or by the Triggerless LNP feature (if the Triggerless LNP feature is turned on). The ISUP NP with EPAP feature is discussed in more detail in the *Feature Manual - G-Port*. The Triggerless LNP feature is discussed in more detail in the *LNP Feature Activation Guide*.


If the Triggerless ISUP based Number Portability (TINP) feature is enabled, the **nsfi** is equal to **stop**, and the **tinp** gateway screening stop action is specified, ISUP IAMs that pass gateway screening are intercepted by the


Triggerless ISUP based Number Portability (TINP) feature and converted to include the routing number (RN) if the call is to a ported number. The TINP feature is discussed in more detail in the *Feature Manual - G-Port*.


If the **nsfi** is equal to anything else, the next screening reference (**nsr**) is identified and the screening process continues to the next screen identified by the **nsfi** and **nsr** parameters. If no match is found, the message is discarded.


[Flowchart 12-44](#) shows the screening action of the allowed OPC screen.

Flowchart 12-1. Allowed OPC Screening Action

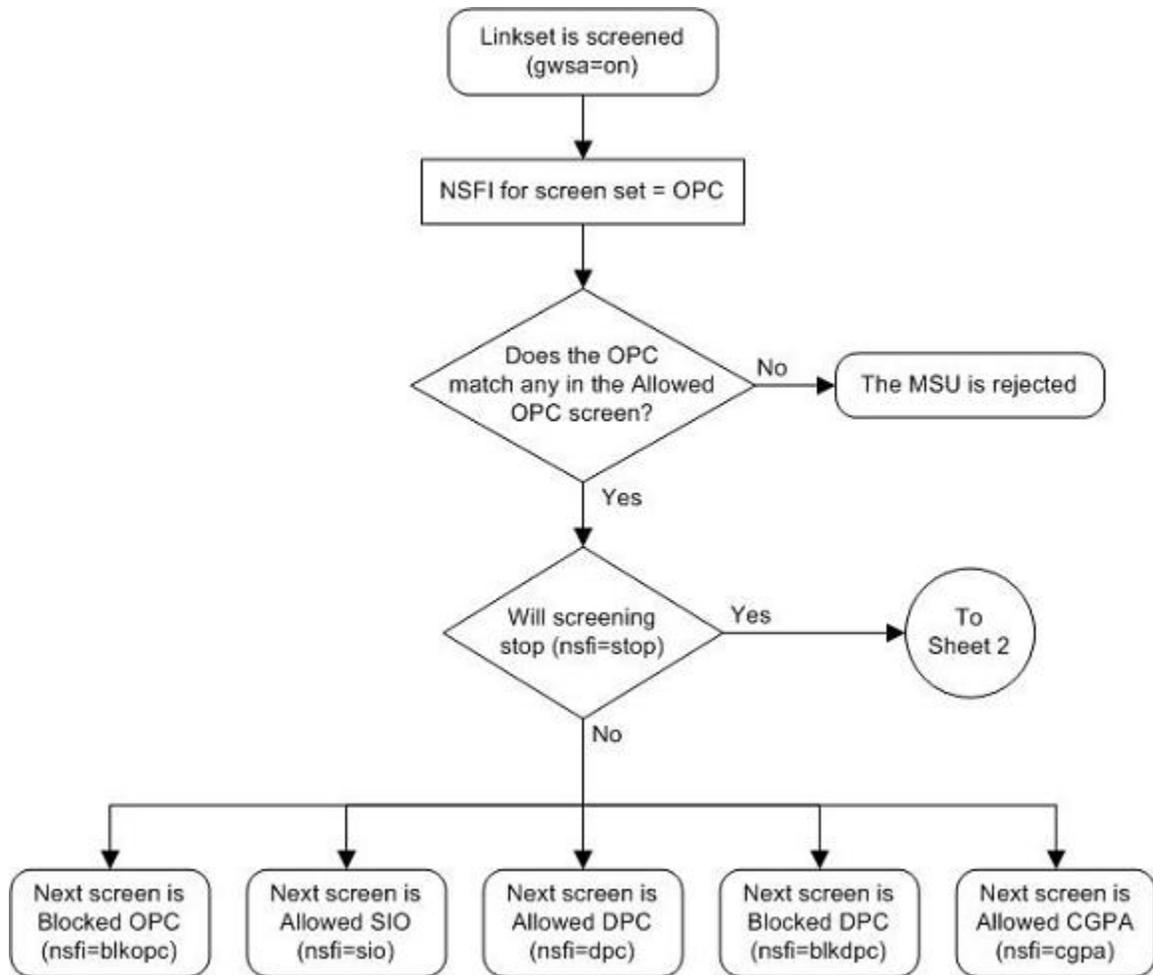

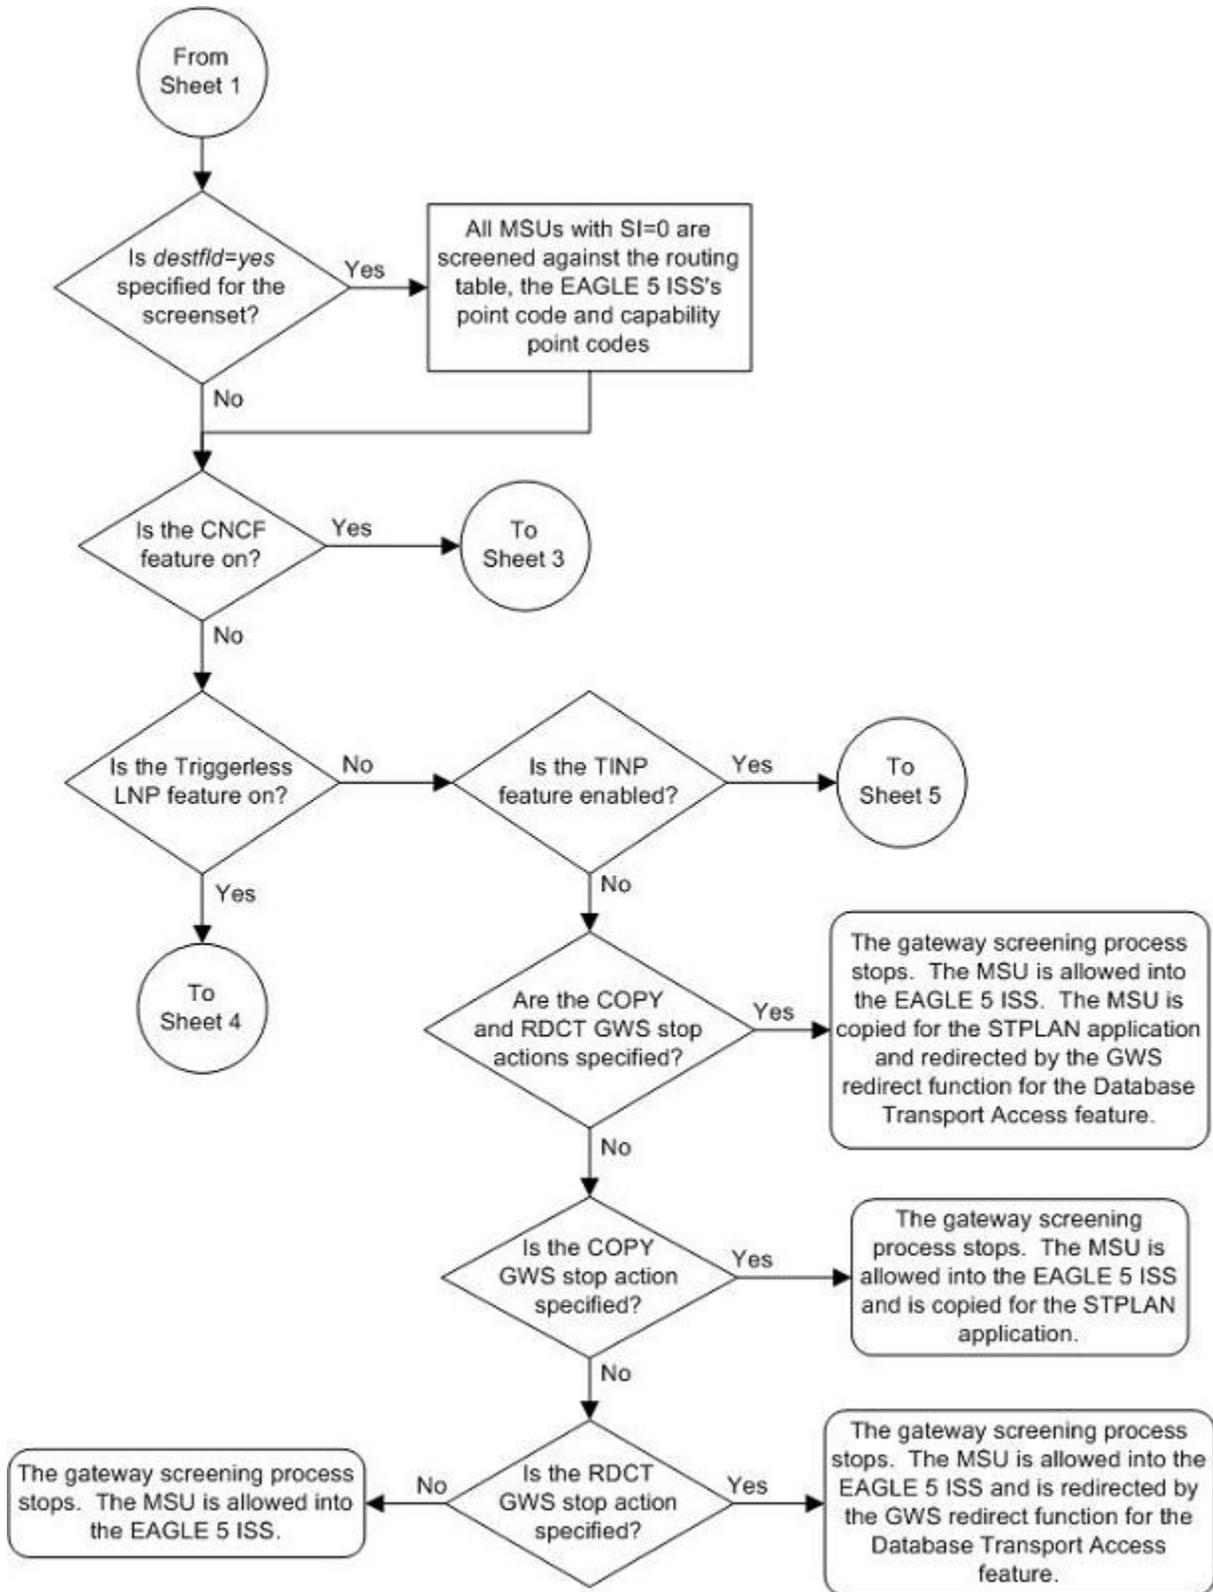

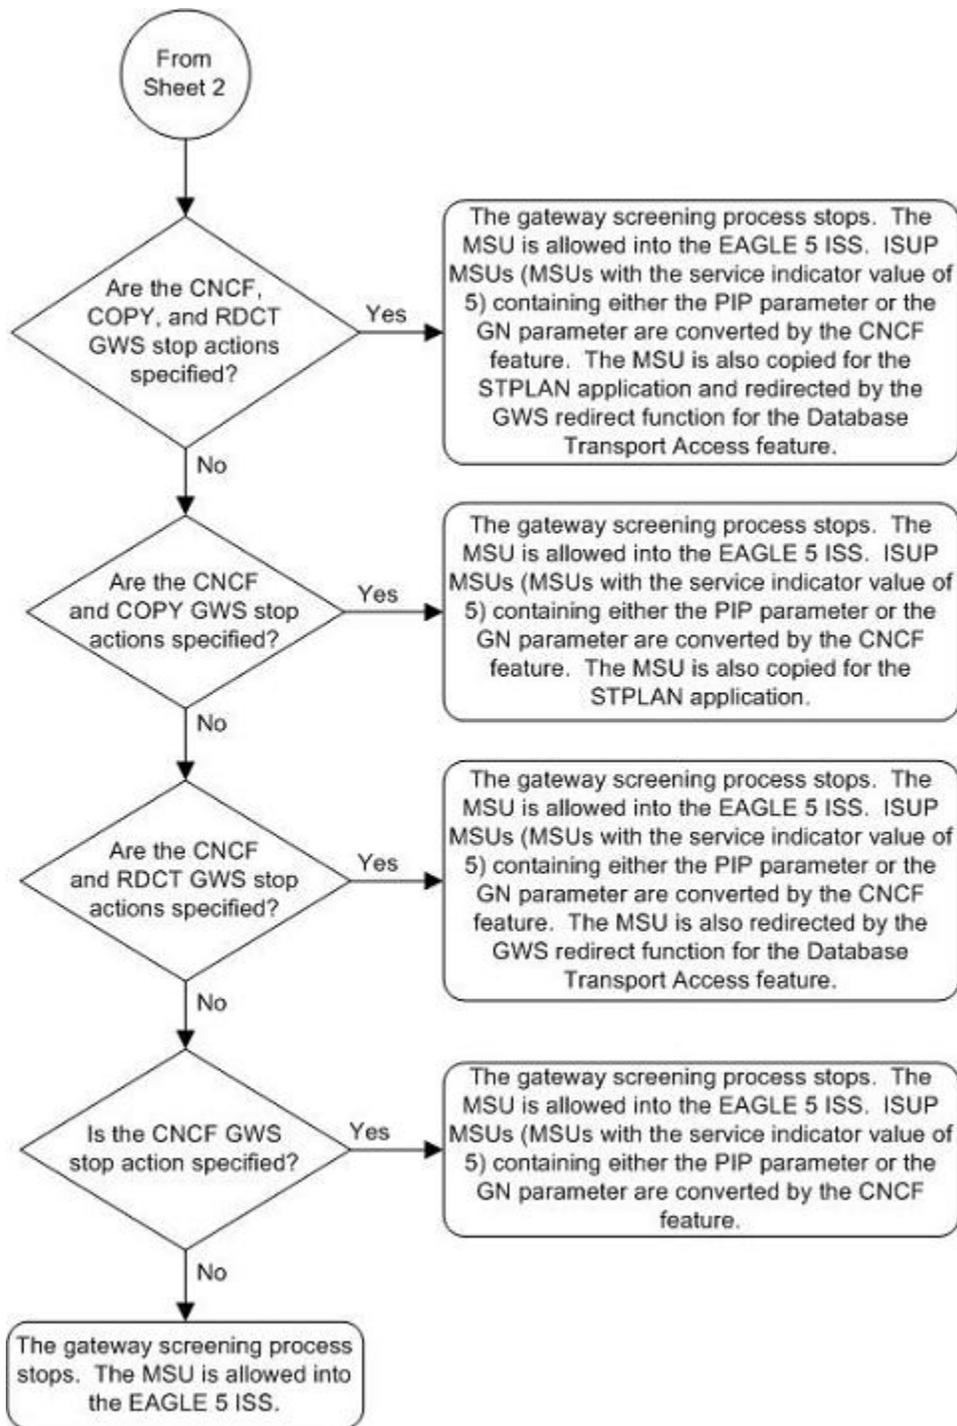

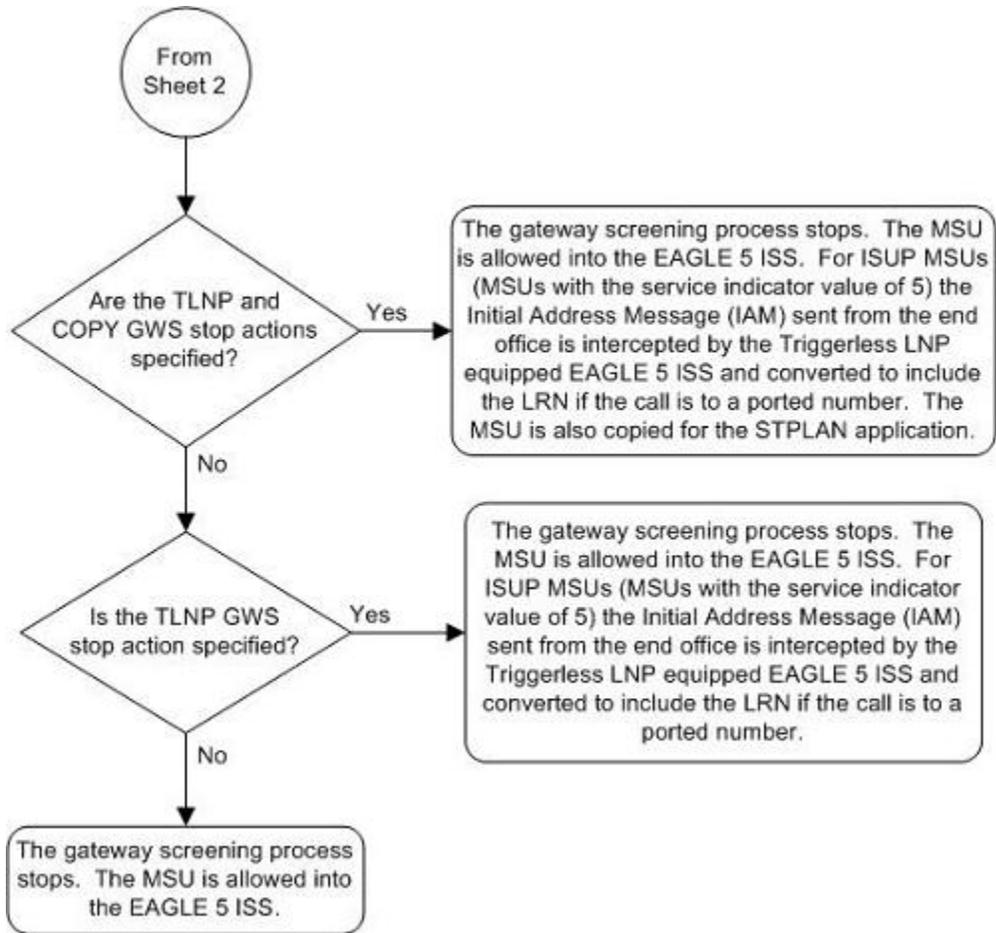


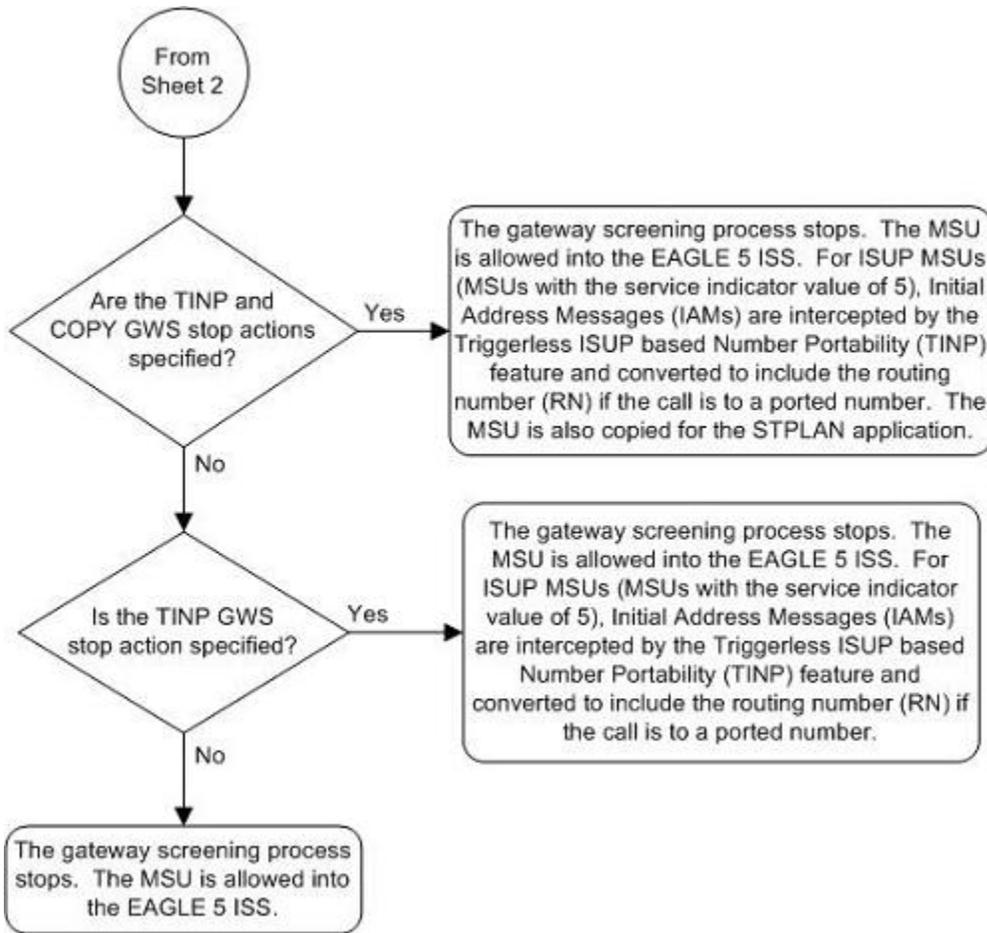


Figure 12-1. Allowed OPC Screening Functions

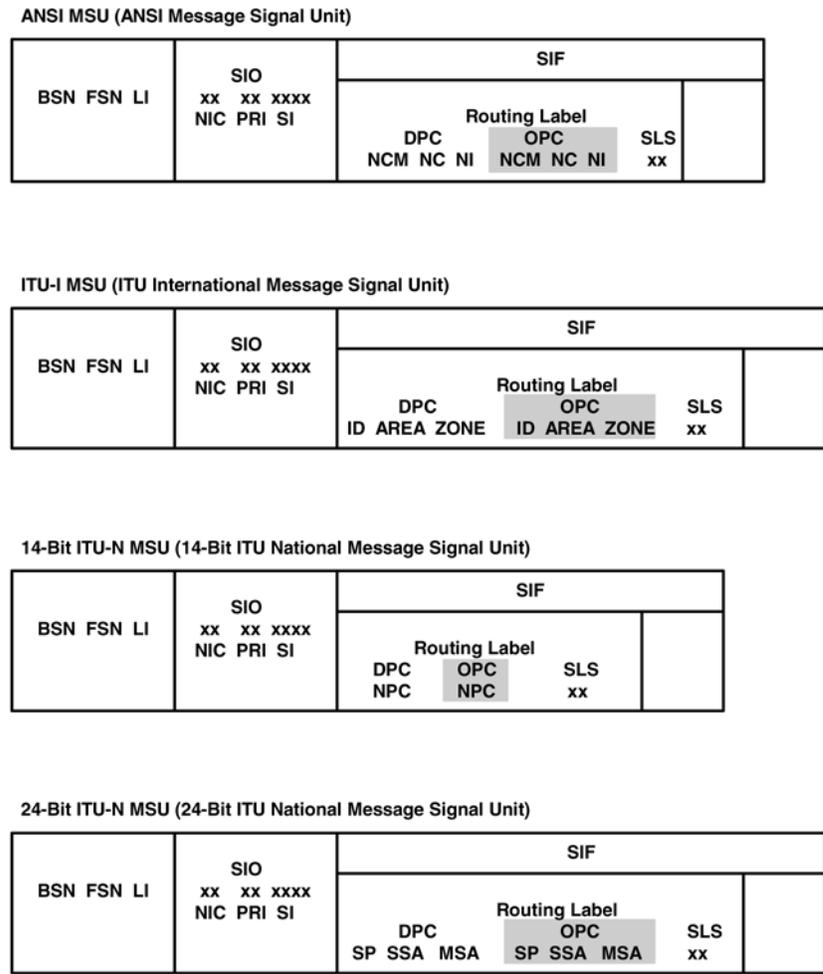

Adding an Allowed OPC Screen

This procedure is used to add an allowed originating point code (OPC) screen to the database using the **ent-scr-opc** command. The parameters used by the **ent-scr-opc** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The examples in this procedure are used to add the allowed OPC screen data shown in [Table 12-1](#) and based on the example configurations shown in [Figure 2-3](#), [Figure 2-7](#), and [Figure 2-9](#).

Table 12-1. Example Gateway Screening Allowed OPC Configuration Table

Screening Reference	NI	NC	NCM	NSFI	NSR
gws4	001	001	001	blkopc	gws3
fld2	010	010	010	blkopc	fld3

Screening Reference	NI	NC	NCM	NSFI	NSR
isp1	015	015	015	blkopc	isp1
tup1	017	017	017	sio	tup1

NOTE: If you using multiple-part ITU national point codes with gateway screening, see the [14-Bit ITU National Point Code Formats](#) section.

The allowed OPC screen can reference one of the following screens.

- Blocked OPC
- Allowed SIO
- Allowed DPC
- Blocked DPC
- Allowed CGPA

Verifying the Gateway Screening Configuration

Enter the following commands to verify that these screens are in the database.

- `rtrv-scr-blkopc:all=yes`
- `rtrv-scr-sio:all=yes`
- `rtrv-scr-dpc:all=yes`
- `rtrv-scr-blkdpc:all=yes`
- `rtrv-scr-cgpa:all=yes`

Gateway Screening Configuration Procedures

If the desired screen is not in the database, perform one of these procedures to add the desired screen to the database or change an existing screen in the database.

- [Adding a Blocked OPC Screen](#)
- [Adding an Allowed SIO Screen](#)
- [Adding an Allowed DPC Screen](#)
- [Adding a Blocked DPC Screen](#)
- [Adding an Allowed Calling Party Address Screen](#)
- [Changing a Blocked OPC Screen](#)
- [Changing an Allowed SIO Screen](#)
- [Changing an Allowed DPC Screen](#)
- [Changing a Blocked DPC Screen](#)
- [Changing an Allowed Calling Party Address Screen](#)

Specifying a Range of Values

A range of values can be specified for the point code parameters **ni**, **nc**, or **ncm**.

If a range of values is specified for any of these parameters, and the value of the other parameters match existing values for the screening reference name, the range of values for the point code parameter cannot include any values for that parameter that are currently provisioned for the screening reference name.

For example, screening reference name **scr1** contains these entries:

SR	NI	NC	NCM	NSFI	NSR/ACT
SCR1	240	001	010	CGPA	-----
SCR1	241	010	020	STOP	-----

Another entry for screening reference **scr1** with the **ni** value of 240 and the **nc** value of 001 cannot be specified if the range of values for the **ncm** parameter includes the value 010.

The ANSI point code parameter values can be specified as a single value, a range of values, or with an asterisk (*). The asterisk specifies all possible values for the **ni**, **nc**, and **ncm** parameters. [Table 12-2](#) shows the valid combinations of these parameter values.

Table 12-2. Valid Value Combinations for ANSI Point Code Parameters

NI	NC	NCM
Single Value	Single Value	Single Value
Single Value	Single Value	Range of Values
Single Value	Single Value	Asterisk
Single Value	Range of Values	Asterisk
Single Value	Asterisk	Asterisk
Range of Values	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

A range of values can also be specified for an ITU-I or 24-bit ITU-N point code parameter using a combination of asterisks (*) and single values for the point code parameters. [Table 12-3](#) shows the valid combinations of the ITU-I parameter values. [Table 12-4](#) shows the valid combinations of the 24-bit ITU-N parameter values.

Table 12-3. Valid Value Combinations for ITU-I Point Code Parameters

ZONE	AREA	ID
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Table 12-4. Valid Value Combinations for 24-Bit ITU-N Point Code Parameters

MSA	SSA	SP
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk

MSA	SSA	SP
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Procedure

1. Verify that the gateway screening feature is on, by entering the **rtrv-feat** command.

If the gateway screening feature is on, the **GWS** field is set to **on**.

NOTE: The rtrv-feat command output contains other fields that are not used by this procedure. If you wish to see all the fields displayed by the rtrv-feat command, see the rtrv-feat command description in the Commands Manual.

If the gateway screening feature is on, shown by the entry **GWS = on** in the **rtrv-feat** command output, skip step 2, and go to step 3.

2. Turn the gateway screening feature on by entering this command.

chg-feat:gws=on

NOTE: Once the gateway screening feature is turned on with the chg-feat command, it cannot be turned off.

NOTE: The gateway screening feature must be purchased before you turn this feature on with the chg-feat command. If you are not sure if you have purchased the gateway screening feature, contact your Tekelec Sales Representative or Account Representative.

When the **chg-feat** has successfully completed, this message should appear.

```
rlghncxa03w 06-10-28 11:43:04 GMT EAGLE5 36.0.0
CHG-FEAT: MASP A - COMPLTD
```

3. Display all allowed OPC screens in the database using the **rtrv-scr-opc** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED OPC
SR   REF  RULES
IEC  YES   2
WRD2 YES   1
WRD4 YES   9
```

If the screening reference names that you wish to add with this procedure are not shown in the **rtrv-scr-opc** command output, go to step 4. For this example, the screening reference names are not shown. If these screening reference names are shown in the **rtrv-scr-opc** command output, make sure the screening data you wish to enter is not already in the database by entering the **rtrv-scr-opc** command with the screening reference name. For example, enter the **rtrv-scr-opc:sr=iec** command. The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED OPC
SR  NI   NC      NCM      NSF1   NSR/ACT
IEC 240   001     010     STOP   -----
IEC 241   010     *       CGPA   cg04

SR      NPC
IEC     00235

NSFI   NSR/ACT
CGPA   cg04
```

```
IEC      00240                      CGPA      cg01

SR      ZONE  AREA  ID      NSFI  NSR/ACT
IEC     1     003   4      BLKOPC blk1
IEC     1     003   5      STOP   -----
```

If a gateway screening stop action set is to be assigned to the allowed OPC screen being added to the database, go to step 4.

Step 4 verifies the gateway screening stop action set names in the database. The gateway screening stop action set names are assigned only if the NSFI of the screen being added in this procedure is STOP. If the NSFI of the new screen will be STOP, but a gateway screening stop action set name will not be assigned to the new screen, skip steps 4, 5, and 6, and go to step 7. If the NSFI of the new screen is not STOP, skip steps 4 and 5, and go to step 6.

4. Display the gateway screening stop action sets in the database with the `rtrv-gws-actset` command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
ACT ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT
ID  NAME  1    2    3    4    5    6    7    8    9    10
--  ----  ---  ---  ---  ---  ---  ---  ---  ---  ---
1   copy  copy
2   rdct  rdct
3   cr    copy rdct
4   cncf  cncf
5   cpcncf copy cncf
6   cncfrd cncf rdct
7   cpcfrd copy cncf rdct
```

GWS action set table is (7 of 16) 44% full

If the required gateway screening stop action set is not in the database, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure to configure the required gateway screening stop action set.

NOTE: If the gateway screening stop action set being assigned to the Allowed OPC screen does not contain the redirect stop action, skip step 5 and go to step 6.

5. Verify the point codes of adjacent nodes by entering the `rtrv-ls` command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-10 11:43:04 GMT EAGLE5 36.0.0
                                L3T SLT
LSN      APCA  (SS7)  SCRN  SET  SET  BEI  LST  LNKS  GWS  GWS  GWS
ele2     001-207-000  none  1   1   no  B   6   off  off  off  no  off
ls1305   000-005-000  none  1   1   no  A   1   off  off  off  no  off
ls1307   000-007-000  none  1   1   no  A   1   off  off  off  no  off
elm1s1   001-001-001  none  1   1   no  A   7   off  off  off  no  off
elm1s2   001-001-002  none  1   1   no  A   7   off  off  off  no  off

                                L3T SLT
LSN      APCI  (SS7)  SCRN  SET  SET  BEI  LST  LNKS  GWS  GWS  GWS
ele2i    1-207-0    none  1   1   no  B   4   off  off  off  ---  on
ls1315   0-015-0    none  1   1   no  A   1   off  off  off  ---  off
ls1317   0-017-0    none  1   1   no  A   1   off  off  off  ---  on
elm2s1   1-011-1    none  1   1   no  A   7   off  off  off  ---  off
elm2s2   1-011-2    none  1   1   no  A   7   off  off  off  ---  off
```

Link set table is (10 of 1024) 1% full.



CAUTION: Redirecting SLTA/SLTM messages prevents SLTA/SLTM messages from being returned to the EAGLE 5 ISS. The signaling link carrying these messages will fail if these messages are not returned to the EAGLE 5 ISS. To prevent SLTA/SLTM

messages from being redirected, gateway screening stop action sets containing the redirect stop action should not be assigned to Allowed OPC screens containing the adjacent point code of a linkset.

NOTE: If the NSFI of the screen being added in this procedure is STOP, skip step 6 and go to step 7.

6. Enter the commands in the [Verifying the Gateway Screening Configuration](#) section to verify that the screen that will be specified by the NSFI/NSR parameter combination in step 8 is in the database.

If the desired screen is not in the database, perform one of the procedures shown in the [Gateway Screening Configuration Procedures](#) section to add the desired screen to the database or change an existing screen in the database.

NOTE: If the point code being added in this procedure is not an ITU-I or 14-bit ITU-N spare point code, skip step 7 and to step 8.

NOTE: If the point code being added in this procedure is an ITU-I or 14-bit ITU-N spare point code and the screening reference contains ITU-I or 14-bit ITU-N spare point codes, skip step 7 and go to step 8.

7. Display the status of the ITU National and International Spare Point Code Support feature by entering the **rtrv-ctrl-feat** command with the ITU National and International Spare Point Code Support feature part number.

Enter this command.

```
rtrv-ctrl-feat:partnum=893013601
```

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
The following features have been permanently enabled:
```

Feature Name	Partnum	Status	Quantity
Spare Point Code Support	893013601	on	----

The following features have been temporarily enabled:

Feature Name	Partnum	Status	Quantity	Trial Period Left
Zero entries found.				

The following features have expired temporary keys:

Feature Name	Partnum
Zero entries found.	

If the ITU National and International Spare Point Code Support feature is enabled, go to step 8.

If the ITU National and International Spare Point Code Support feature is not enabled, perform the “Activating the ITU National and International Spare Point Code Support Feature” procedure in the *Database Administration Manual - SS7* to enable the ITU National and International Spare Point Code Support feature as required. After the feature has been enabled, go to step 8.

8. Add a new allowed OPC screen to the database using the **ent-scr-opc** command.

If a gateway screening stop action is to be assigned to the allowed OPC screen being changed, enter the **ent-scr-opc** command with the **nsfi=stop** parameter and the **actname** parameter with the name of a gateway screening stop action set shown in the output of the **rtrv-gws-actset** command executed in step 4.



CAUTION: Redirecting SLTA/SLTM messages prevents SLTA/SLTM messages from being returned to the EAGLE 5 ISS. The signaling link carrying these messages will fail if these messages are not returned to the EAGLE 5 ISS. To prevent SLTA/SLTM messages from being redirected, gateway screening stop action sets containing the redirect stop action should not be assigned to Allowed OPC screens containing the adjacent point code of a linkset, shown in step 5.

The following list contains the values for **ni**, **nc**, **ncm**, **zone**, **area**, **id**, **npc**, **msa**, **ssa**, and **sp** parameters:

- **ni** – 0 - 255 or an asterisk (*)
- **nc** – 0 - 255 or an asterisk (*)
- **ncm** – 0 - 255 or an asterisk (*)
- **zone** – 0 - 7 or an asterisk (*)
- **area** – 0 - 255 or an asterisk (*)
- **id** – 0 - 7 or an asterisk (*)
- **npc** – 1 - 16383 or an asterisk (*)
- **msa** – 0 - 255 or an asterisk (*)
- **ssa** – 0 - 255 or an asterisk (*)
- **sp** – 0 - 255 or an asterisk (*)

A range of values can be specified for the **ni**, **nc**, and **ncm** parameters. See the [“Specifying a Range of Values”](#) section for more information on how the asterisk and a range of values are used for the **ni**, **nc**, and **ncm** parameters.

To add a spare point code to the allowed OPC screen, the **pcst=s** parameter must be specified. To add a non-spare point code to the allowed OPC screen, the **pcst** parameter does not have to be specified. If the **pcst** parameter is specified for a screen containing an ITU-I or 14-bit ITU-N non-spare point code, the value must be **none**.

For this example, enter these commands.

```
ent-scr-opc:sr=gws4:ni=001:nc=001:ncm=001:nsfi=blkopc:nsr=gws3
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
ENT-SCR-OPC: SCREEN SET AFFECTED - GWS4 1% FULL
ENT-SCR-OPC: MASP A - COMPLTD
```

```
ent-scr-opc:sr=fld2:ni=010:nc=010:ncm=010:nsfi=blkopc:nsr=fld3
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:29:30 GMT EAGLE5 36.0.0
ENT-SCR-OPC: SCREEN SET AFFECTED - FLD2 1% FULL
ENT-SCR-OPC: MASP A - COMPLTD
```

```
ent-scr-opc:sr=ispl:ni=015:nc=015:ncm=015:nsfi=blkopc:nsr=ispl
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:29:30 GMT EAGLE5 36.0.0
```

```
ENT-SCR-OPC: SCREEN SET AFFECTED - ISP1 1% FULL
ENT-SCR-OPC: MASP A - COMPLTD
```

```
ent-scr-opc:sr=tup1:ni=017:nc=017:ncm=017:nsfi=sio:nsr=tup1
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:29:30 GMT EAGLE5 36.0.0
ENT-SCR-OPC: SCREEN SET AFFECTED - TUP1 1% FULL
ENT-SCR-OPC: MASP A - COMPLTD
```

9. Verify the changes using the **rtrv-scr-opc** command with the screening reference name used in step 8. For this example, enter these commands.

```
rtrv-scr-opc:sr=gws4
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:30:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED OPC
SR  NI      NC      NCM      NSFI     NSR/ACT
GWS4 001      001      001      BLKOPC   GWS3
```

```
rtrv-scr-opc:sr=fld2
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:31:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED OPC
SR  NI      NC      NCM      NSFI     NSR/ACT
FLD2 010      010      010      BLKOPC   FLD3
```

```
rtrv-scr-opc:sr=isp1
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:31:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED OPC
SR  NI      NC      NCM      NSFI     NSR/ACT
ISP1 015      015      015      BLKOPC   ISP1
```

```
rtrv-scr-opc:sr=tup1
```

The following is an example of the possible output.


```
rlghncxa03w 06-10-25 15:31:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED OPC
SR  NI      NC      NCM      NSFI     NSR/ACT
TUP1 017      017      017      SIO      TUP1
```


10. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.


The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.


```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 12-2. Adding an Allowed OPC Screen

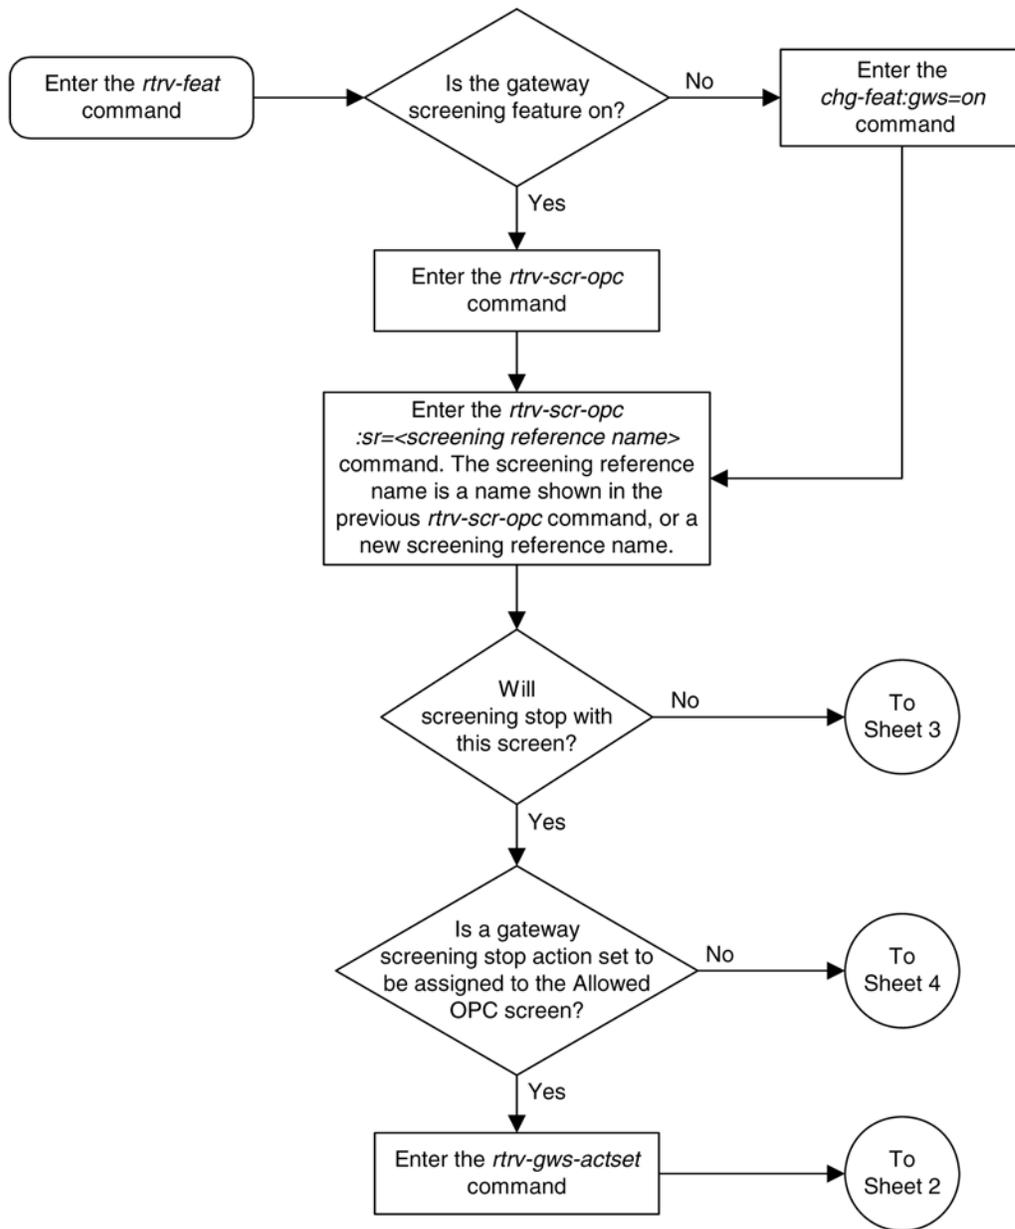

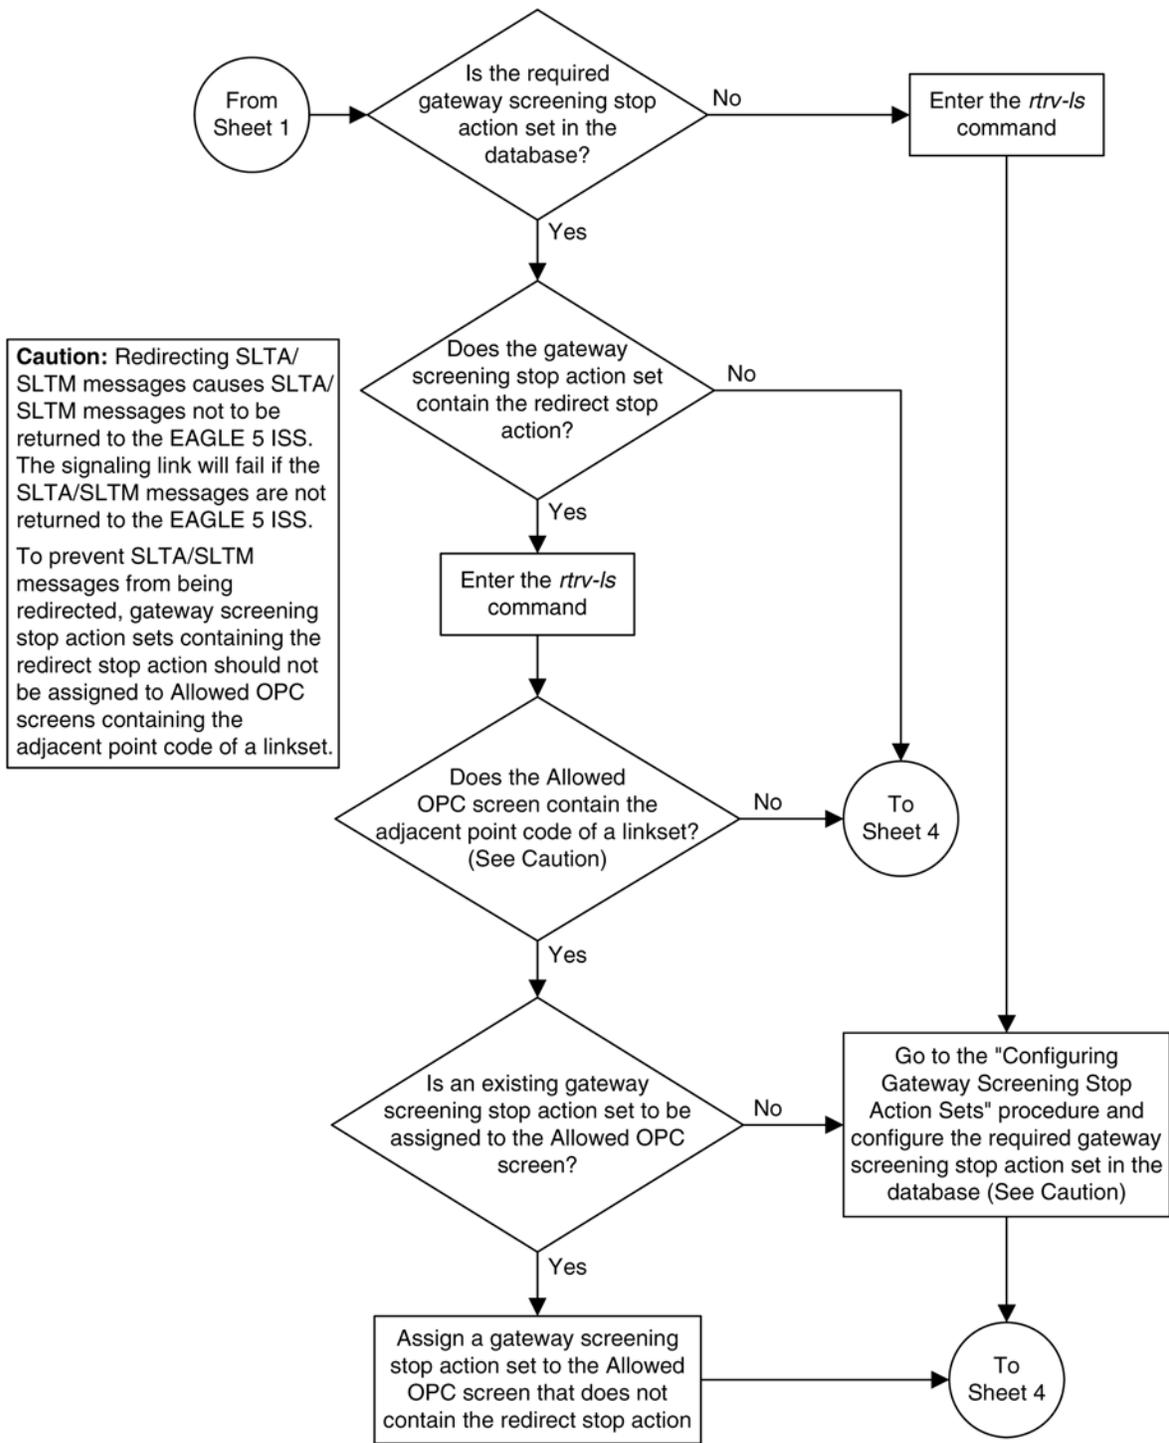

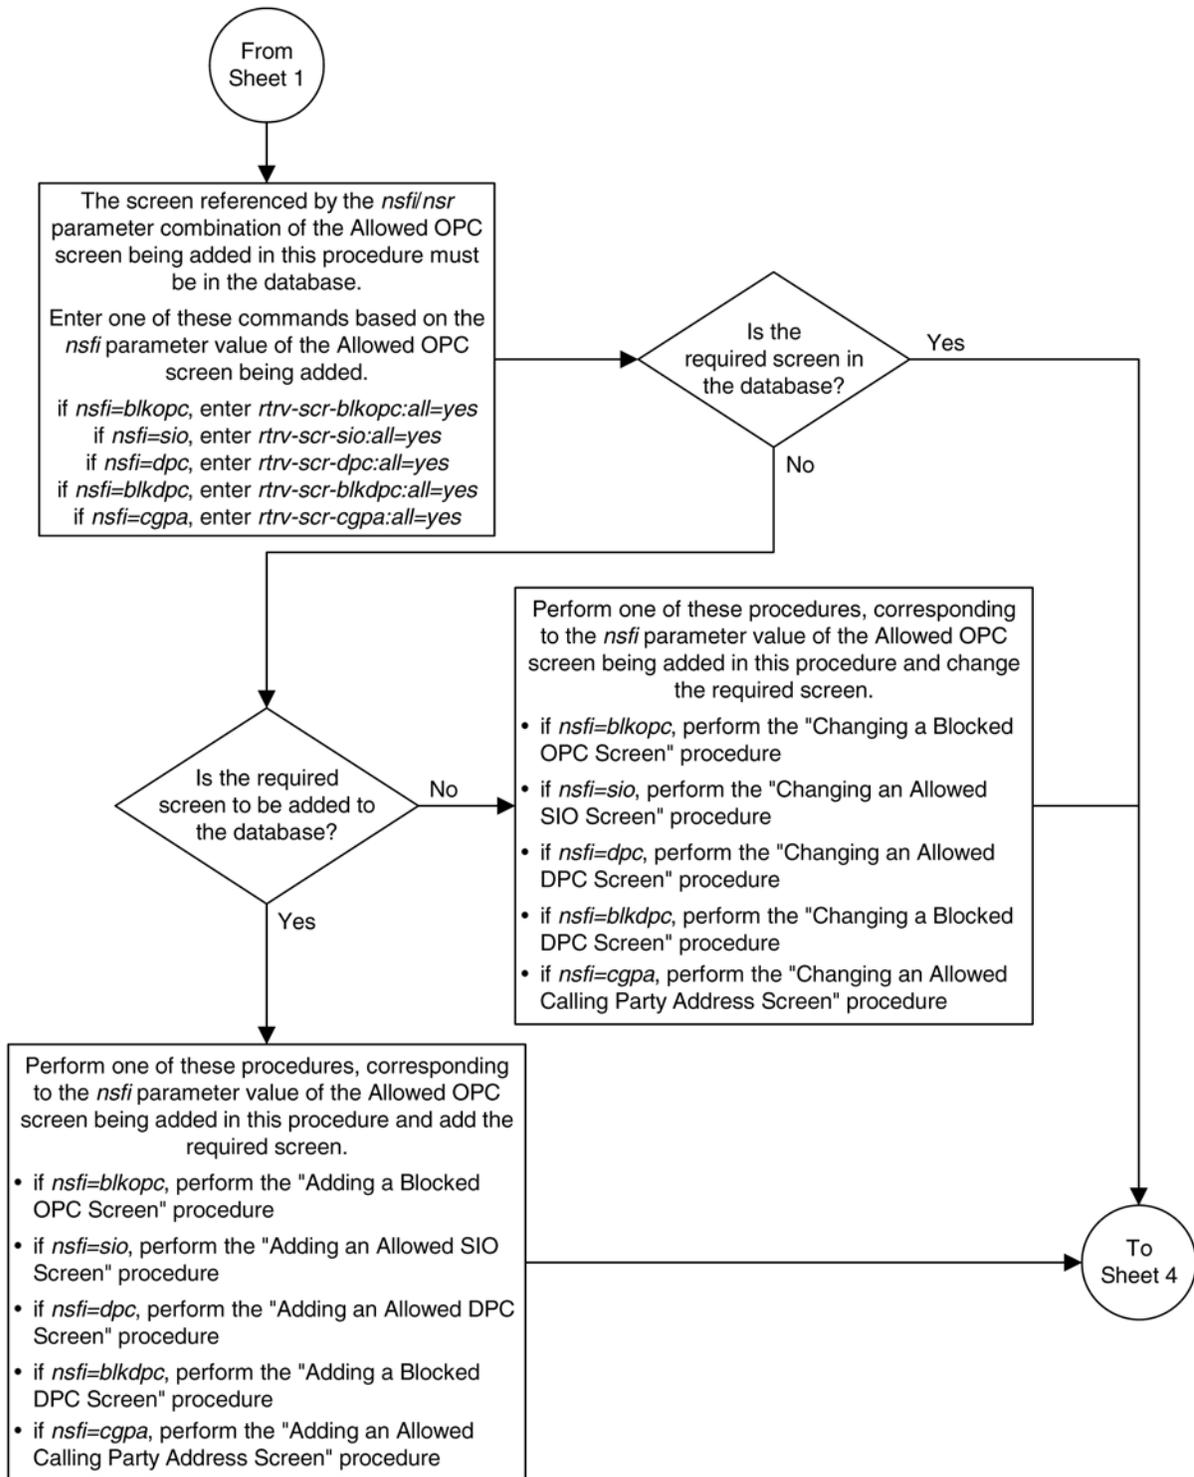

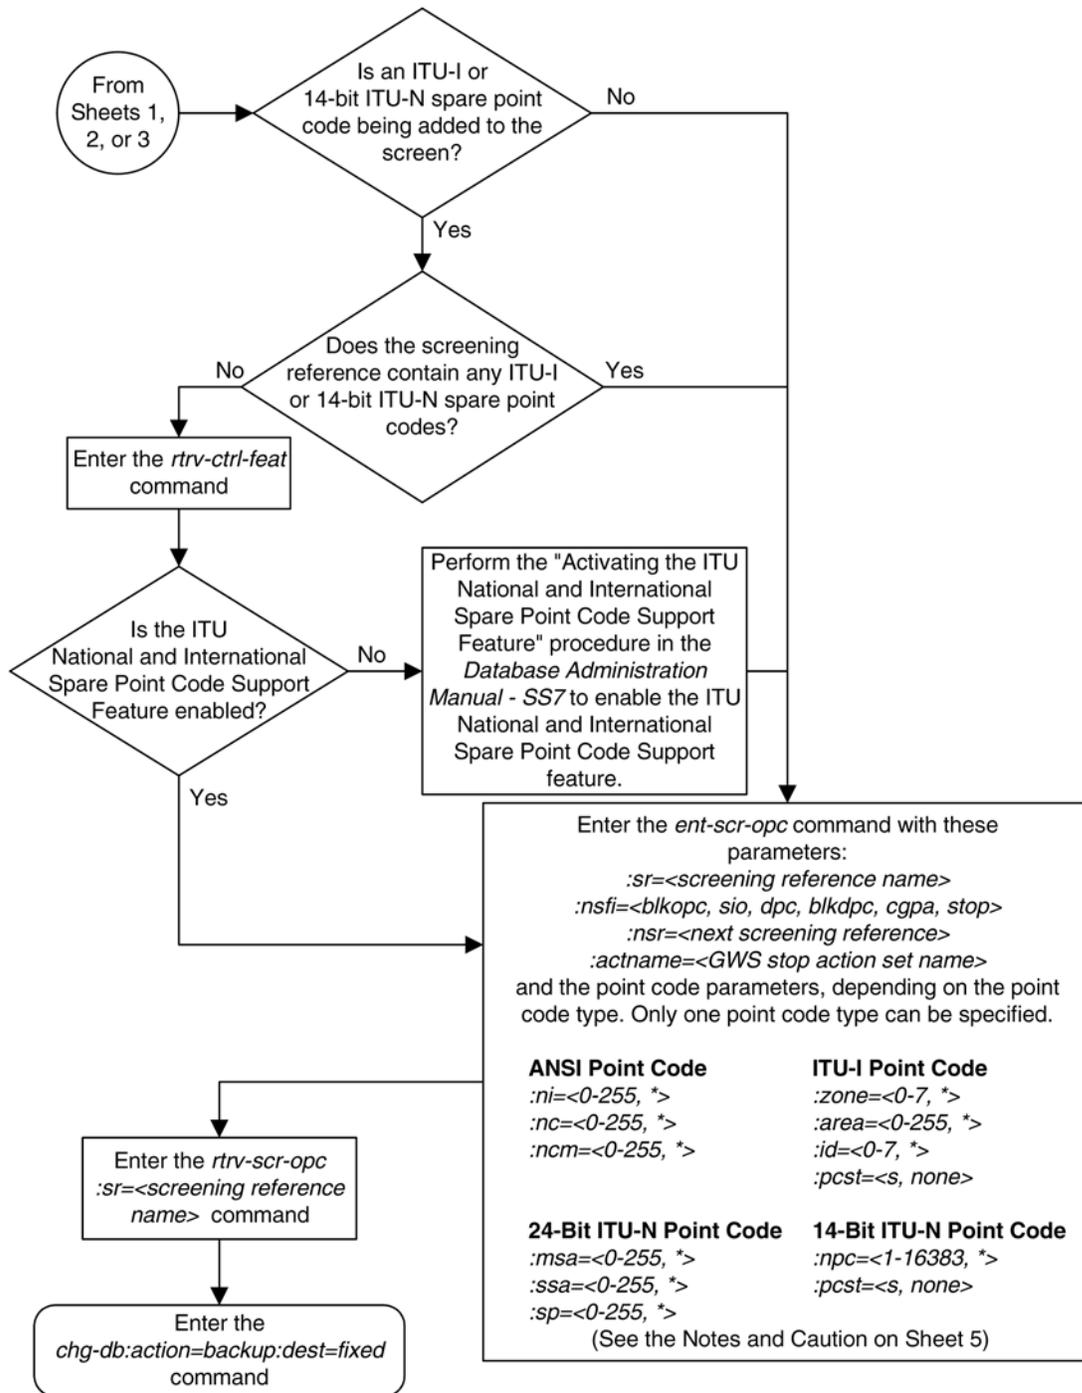

Notes:

1. A range of values can be specified for the *ni*, *nc*, or *ncm* parameters by inserting double ampersands (&&) between the parameter values defining the range. For example, to specify the range 025 to 200 for the *ni* parameter, enter 025&&200 for the *ni* parameter value.

2. The asterisk (*) specifies the entire range of values for that parameter.

For more information about specifying a range of values and about using the asterisk, see the "Gateway Screening Attributes" section in Chapter 2 and the "Specifying a Range of Values" section in this procedure.

3. The *nsr* parameter can be specified only, and must be specified, if the *nsfi* parameter value is either *blkopc*, *sio*, *dpc*, *blkdpc*, or *cgpa*.

4. The *actname* parameter is optional and can be specified only with the *nsfi=stop* parameter. If the *actname* parameter is specified, the *actname* parameter value is one of the gateway screening stop action set names shown in the *rtrv-gws-actset* output on Sheet 1.

5. To add a non-spare point code, the *pcst* parameter does not have to be specified. If the *pcst* parameter is specified for a screen containing an ITU-I or 14-bit ITU-N non-spare point code, the value must be *none*.

6. To add a spare point code, the *pcst=s* parameter must be specified.

Caution: Redirecting SLTA/SLTM messages causes SLTA/SLTM messages not to be returned to the EAGLE 5 ISS. The signaling link will fail if the SLTA/SLTM messages are not returned to the EAGLE 5 ISS.

To prevent SLTA/SLTM messages from being redirected, gateway screening stop action sets containing the redirect stop action should not be assigned to Allowed OPC screens containing the adjacent point code of a linkset.

Removing an Allowed OPC Screen

This procedure is used to remove an allowed originating point code (OPC) screen from the database using the **dlt-scr-opc** command. The parameters used by the **dlt-scr-opc** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The example in this procedure removes the allowed OPC screen **gws4** from the database.

NOTE: If you using multiple-part ITU national point codes with gateway screening, see the [14-Bit ITU National Point Code Formats](#) section.

The allowed OPC screen can only be referenced by a screen set.

Enter the **rtrv-scrset:nsfi=opc** command to verify that none of the screen sets reference the allowed OPC screen being removed from the database.

To change the NSFI of any of the screen sets, perform the [Changing a Screen Set](#) procedure.

Procedure

1. Display the allowed OPC screens in the database using the **rtrv-scr-opc** command.

The following is an example of the possible output.

```
r1ghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED OPC

SR      REF  RULES
```

```
GWS4  YES    1
IEC    YES    6
ISP1   YES    1
TUP1   YES    1
WRD2   YES    1
WRD4   YES    9
```

From the **rtrv-scr-opc** output, display the allowed OPC screen you wish to remove using the **rtrv-scr-opc** command with the screening reference name. For this example, enter this command.

```
rtrv-scr-opc:sr=gws4
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT  EAGLE5 36.0.0
SCREEN = ALLOWED OPC
SR      NI      NC      NCM      NSFI      NSR/ACT
GWS4   001      001      001      BLKOPC   GWS7
```

2. Enter the **rtrv-scrset:nsfi=opc** command to verify that none of the screen sets reference the allowed OPC screen being removed from the database.

To change the NSFI of any of the screen sets, perform the [Changing a Screen Set](#) procedure.

3. Remove the allowed OPC screen from the database using the **dlt-scr-opc** command with the screening reference name shown in the **rtrv-scr-opc** output in step 1 and with the point code parameter values (**ni**, **nc**, **ncm**, or **zone**, **area**, **id**, or **npc**, or **msa**, **ssa**, **sp**) of the screen being removed from the database. The values for these parameters must be entered exactly as shown in the **rtrv-scr-opc** output.

To remove an entry containing either an ITU-I or a 14-bit ITU-N spare point code, the **pcst=s** parameter must be specified with the **dlt-scr-opc** command.

To remove an entry containing either an ITU-I or a 14-bit ITU-N non-spare point code, the **pcst** parameter does not have to be specified with the **dlt-scr-opc** command. If the **pcst** parameter is specified, the value must be **none**.

For this example, enter this command.

```
dlt-scr-opc:sr=gws4:ni=001:nc=001:ncm=001
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:26:30 GMT  EAGLE5 36.0.0
DLT-SCR-OPC: SCREEN SET AFFECTED - GWS4  0% FULL
DLT-SCR-OPC: MASP A - COMPLTD
```

4. Verify the changes using the **rtrv-scr-opc** command with the screening reference name used in step 3.

For this example, enter this command.

```
rtrv-scr-opc:sr=gws4
```

The following is an example of the possible output.

```
E2573 Cmd Rej: SR or NSR does not reference an existing SR
```

This message shows that the specified screening reference name is not in the database and the action of the **dlt-scr-opc** command in step 3 was successful. If the specified screening reference name contained more than one entry when the **dlt-scr-opc** command was executed in step 3, the **rtrv-scr-opc:sr=** command output would show the remaining entries in the screening reference instead of error message E2573.


- Backup the new changes using the `chg-db:action=backup:dest=fixed` command.

The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```

BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
    
```

Flowchart 12-3. Removing an Allowed OPC Screen

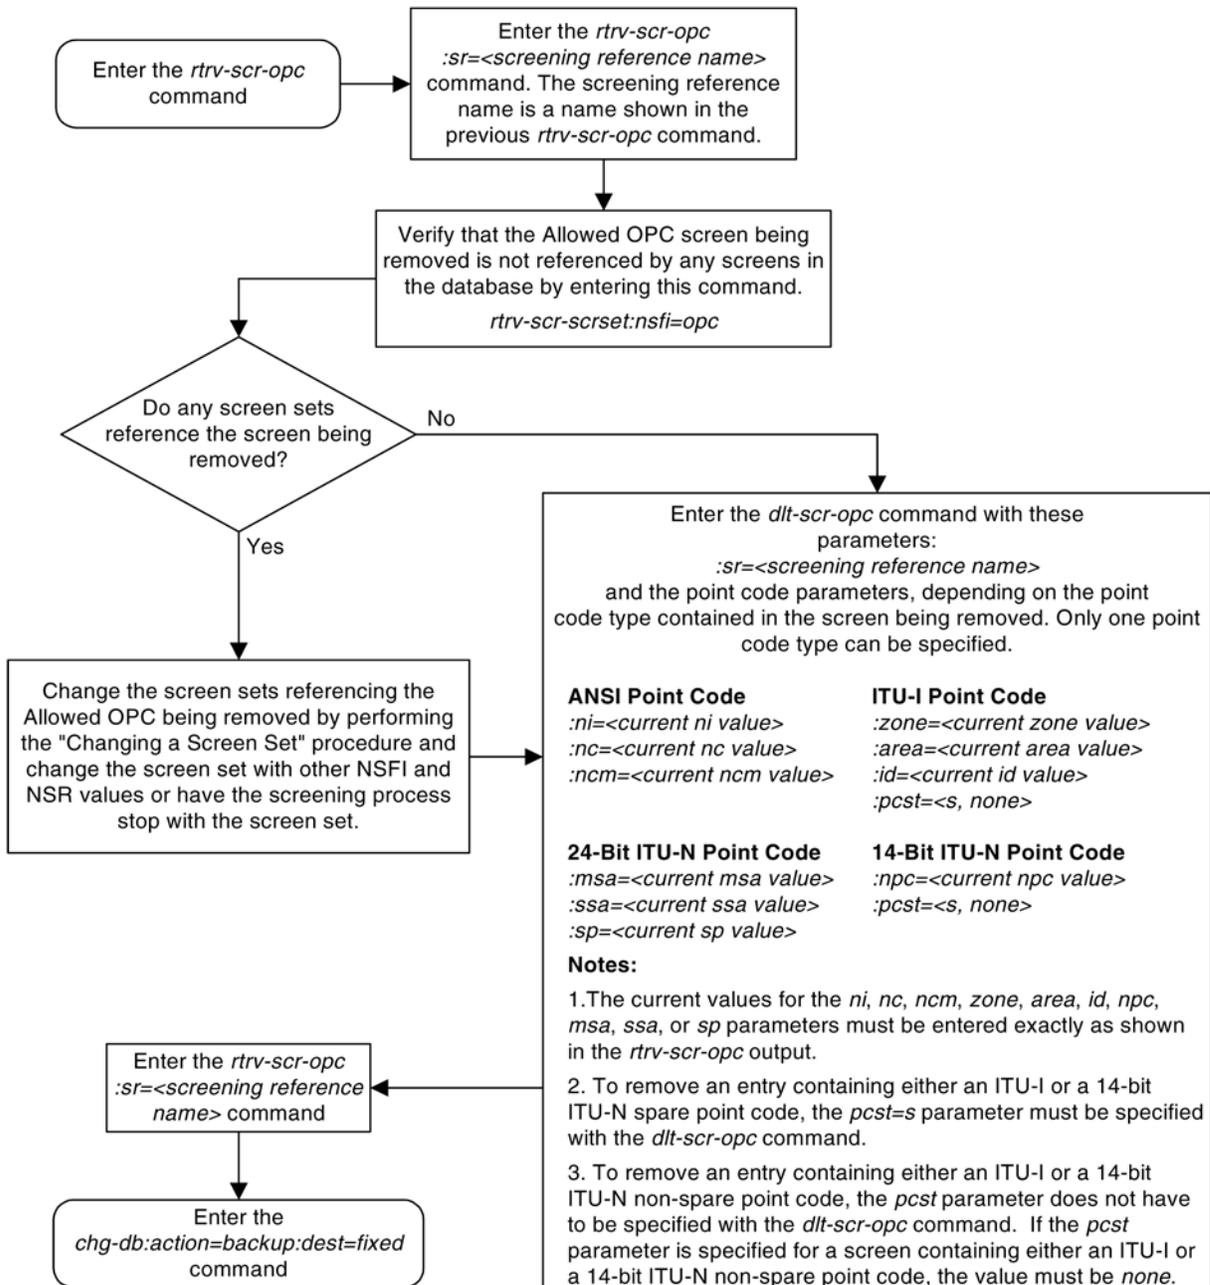

Changing an Allowed OPC Screen

This procedure is used to change the attributes of an allowed originating point code (OPC) screen in the database using the **chg-scr-opc** command. The parameters used by the **chg-scr-opc** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The example in this procedure is used to change the point code for the allowed OPC screen **wrd2** to 230-230-230, the NSFI to **blkopc**, and the NSR to **wrd6**.

NOTE: If you using multiple-part ITU national point codes with gateway screening, see the [14-Bit ITU National Point Code Formats](#) section.

The allowed OPC screen can reference one of the following screens.

- Blocked OPC
- Allowed SIO
- Allowed DPC
- Blocked DPC
- Allowed CGPA

Verifying the Gateway Screening Configuration

Enter the following commands to verify that these screens are in the database.

- **rtrv-scr-blkopc:all=yes**
- **rtrv-scr-sio:all=yes**
- **rtrv-scr-dpc:all=yes**
- **rtrv-scr-blkdpc:all=yes**
- **rtrv-scr-cgpa:all=yes**

Gateway Screening Configuration Procedures

If the desired screen is not in the database, perform one of these procedures to add the desired screen to the database or change an existing screen in the database.

- [Adding a Blocked OPC Screen](#)
- [Adding an Allowed SIO Screen](#)
- [Adding an Allowed DPC Screen](#)
- [Adding a Blocked DPC Screen](#)
- [Adding an Allowed Calling Party Address Screen](#)
- [Changing a Blocked OPC Screen](#)
- [Changing an Allowed SIO Screen](#)
- [Changing an Allowed DPC Screen](#)
- [Changing a Blocked DPC Screen](#)
- [Changing an Allowed Calling Party Address Screen](#)

Specifying a Range of Values

A range of values can be specified for the point code parameters **ni**, **nc**, or **ncm**.

If a range of values is specified for any of these parameters, and the value of the other parameters match existing values for the screening reference name, the range of values for the point code parameter cannot include any values for that parameter that are currently provisioned for the screening reference name.

For example, screening reference name **scr1** contains these entries:

SR	NI	NC	NCM	NSFI	NSR/ACT
SCR1	240	001	010	CGPA	-----
SCR1	241	010	020	STOP	-----

Another entry for screening reference **scr1** with the **ni** value of 240 and the **nc** value of 001 cannot be specified if the range of values for the **ncm** parameter includes the value 010.

The ANSI point code parameter values can be specified as a single value, a range of values, or with an asterisk (*). The asterisk specifies all possible values for the **ni**, **nc**, and **ncm** parameters. [Table 12-5](#) shows the valid combinations of these parameter values.

Table 12-5. Valid Value Combinations for ANSI Point Code Parameters

NI	NC	NCM
Single Value	Single Value	Single Value
Single Value	Single Value	Range of Values
Single Value	Single Value	Asterisk
Single Value	Range of Values	Asterisk
Single Value	Asterisk	Asterisk
Range of Values	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

A range of values can also be specified for an ITU-I or 24-bit ITU-N point code parameter using a combination of asterisks (*) and single values for the point code parameters. [Table 12-6](#) shows the valid combinations of the ITU-I parameter values. [Table 12-7](#) shows the valid combinations of the 24-bit ITU-N parameter values.

Table 12-6. Valid Value Combinations for ITU-I Point Code Parameters

ZONE	AREA	ID
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Table 12-7. Valid Value Combinations for 24-Bit ITU-N Point Code Parameters

MSA	SSA	SP
Single Value	Single Value	Single Value
Single Value	Single Value	Asterisk
Single Value	Asterisk	Asterisk
Asterisk	Asterisk	Asterisk

Procedure

1. Display the allowed OPC screens in the database using the **rtrv-scr-opc** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED DPC
SR   REF  RULES
GWS4 YES   1
IEC  YES   6
ISP1 YES   1
TUP1 YES   1
WRD2 YES   1
WRD4 YES   9
```

From the **rtrv-scr-opc** output, display the allowed OPC screen you wish to remove using the **rtrv-scr-opc** command with the screening reference name. For this example, enter this command.

```
rtrv-scr-opc:sr=wrd2
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED OPC
SR   NI      NC      NCM      NSFI      NSR/ACT
WRD2 243      015      001      STOP      -----
```

If a gateway screening stop action set is to be assigned to the allowed OPC screen being changed in the database, go to step 2.

Step 2 verifies the gateway screening stop action set names in the database. The gateway screening stop action set names are assigned only if the NSFI of the screen being changed in this procedure is STOP. If the NSFI of the screen will be changed to STOP, but a gateway screening stop action set name will not be assigned to the screen, skip steps 2, 3, and 4 and go to step 5. If the NSFI of the screen will not be STOP, skip step 2 and 3, and go to step 4.

2. Display the gateway screening stop action sets in the database with the **rtrv-gws-actset** command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
ACT  ACT
ID  NAME  1   2   3   4   5   6   7   8   9   10
--  ---  - - - - -
1   copy  copy
2   rdct  rdct
3   cr    copy rdct
4   cncf  cncf
5   cpcncf copy cncf
6   cncfrd cncf rdct
```

```
7    cpcf rd copy cnf rdct
GWS action set table is (7 of 16) 44% full
```

If the required gateway screening stop action set is not in the database, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure to configure the required gateway screening stop action set.

NOTE: If the gateway screening stop action set being assigned to the Allowed OPC screen does not contain the redirect stop action, skip step 3 and go to step 4.

3. Verify the point codes of adjacent nodes by entering the `rttrv-ls` command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-10 11:43:04 GMT EAGLE5 36.0.0

LSN          APCA  (SS7)  SCRNL3T  SLT          GWS  GWS  GWS
           SET  SET  BEI  LST  LNKS  ACT  MES  DIS  SLSCI  NIS
ele2         001-207-000  none  1   1   no  B   6   off off off no   off
ls1305       000-005-000  none  1   1   no  A   1   off off off no   off
ls1307       000-007-000  none  1   1   no  A   1   off off off no   off
elm1s1       001-001-001  none  1   1   no  A   7   off off off no   off
elm1s2       001-001-002  none  1   1   no  A   7   off off off no   off

LSN          APCI  (SS7)  SCRNL3T  SLT          GWS  GWS  GWS
           SET  SET  BEI  LST  LNKS  ACT  MES  DIS  SLSCI  NIS
ele2i        1-207-0      none  1   1   no  B   4   off off off ---  on
ls1315       0-015-0      none  1   1   no  A   1   off off off ---  off
ls1317       0-017-0      none  1   1   no  A   1   off off off ---  on
elm2s1       1-011-1      none  1   1   no  A   7   off off off ---  off
elm2s2       1-011-2      none  1   1   no  A   7   off off off ---  off

Link set table is (10 of 1024) 1% full.
```



CAUTION: Redirecting SLTA/SLTM messages prevents SLTA/SLTM messages from being returned to the EAGLE 5 ISS. The signaling link carrying these messages will fail if these messages are not returned to the EAGLE 5 ISS. To prevent SLTA/SLTM messages from being redirected, gateway screening stop action sets containing the redirect stop action should not be assigned to Allowed OPC screens containing the adjacent point code of a linkset.

NOTE: If the NSFI of the screen being changed in this procedure will be STOP, or if the NSFI of the screen is not being changed, skip step 4 and go to step 5.

4. Enter the commands in the [Verifying the Gateway Screening Configuration](#) section to verify that the screen that will be specified by the NSFI/NSR parameter combination in step 6 is in the database.

If the desired screen is not in the database, perform one of the procedures shown in the [Gateway Screening Configuration Procedures](#) section to add the desired screen to the database or change an existing screen in the database.

NOTE: If any of these conditions apply to this procedure, skip this step and go to step 6:

- The point code in the screen is not being changed.
- The screen being changed contains either an ANSI or 24-bit ITU-N point code.
- The ITU-I or 14-bit ITU-N non-spare point code in the screen is not being changed to an ITU-I or 14-bit ITU-N spare point code.
- The point code in the screen is an ITU-I or 14-bit ITU-N spare point code or the screening reference contains other screens with ITU-I or 14-bit ITU-N spare point codes.

5. Display the status of the ITU National and International Spare Point Code Support feature by entering the **rtrv-ctrl-feat** command with the ITU National and International Spare Point Code Support feature part number.

Enter this command.

```
rtrv-ctrl-feat:partnum=893013601
```

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
The following features have been permanently enabled:
```

Feature Name	Partnum	Status	Quantity
Spare Point Code Support	893013601	on	----

The following features have been temporarily enabled:

Feature Name	Partnum	Status	Quantity	Trial Period Left
Zero entries found.				

The following features have expired temporary keys:

Feature Name	Partnum
Zero entries found.	

If the ITU National and International Spare Point Code Support feature is enabled, go to step 6.

If the ITU National and International Spare Point Code Support feature is not enabled, perform the “Activating the ITU National and International Spare Point Code Support Feature” procedure in the *Database Administration Manual - SS7* to enable the ITU National and International Spare Point Code Support feature as required. After the feature has been enabled, go to step 6.

6. Change the attributes for the allowed OPC using the **chg-scr-opc** command.

If a gateway screening stop action is to be assigned to the allowed OPC screen being changed, enter the **chg-scr-opc** command with the **nsfi=stop** parameter and the **actname** parameter with the name of a gateway screening stop action set shown in the output of the **rtrv-gws-actset** command executed in step 2.



CAUTION: Redirecting SLTA/SLTM messages prevents SLTA/SLTM messages from being returned to the EAGLE 5 ISS. The signaling link carrying these messages will fail if these messages are not returned to the EAGLE 5 ISS. To prevent SLTA/SLTM messages from being redirected, gateway screening stop action sets containing the redirect stop action should not be assigned to Allowed OPC screens containing the adjacent point code of a linkset, shown in step 3.

The current values for the **ni**, **nc**, **ncm**, **zone**, **area**, **id**, **npc**, **msa**, **ssa**, and **sp** parameters must be entered exactly as shown in the **rtrv-scr-opc** output in step 1.

The following list contains the values for the **nni**, **nnc**, **nncm**, **nzone**, **narea**, **nid**, and **nnpc** parameters:

- nni – 0 - 255 or an asterisk (*)
- nnc – 0 - 255 or an asterisk (*)
- nncm – 0 - 255 or an asterisk (*)
- nzone – 0 - 7 or an asterisk (*)
- narea – 0 - 255 or an asterisk (*)
- nid – 0 - 7 or an asterisk (*)

- `nnpc` – 1 - 16383 or an asterisk (*)
- `nmsa` – 0 - 255 or an asterisk (*)
- `nssa` – 0 - 255 or an asterisk (*)
- `nsp` – 0 - 255 or an asterisk (*)

A range of values can be specified for the `nni`, `nnc`, and `nncm` parameters. See the [“Specifying a Range of Values”](#) section for more information on how the asterisk and a range of values are used for the `nni`, `nnc`, and `nncm` parameters.

To change an ITU-I or 14-bit ITU-N spare point code to a non-spare point code, both the `pcst=s` and `npcst=none` parameters must be specified with the `chg-scr-opc` command.

To change an ITU-I or 14-bit ITU-N non-spare point code to a spare point code, the `npcst=s` parameter must be specified with the `chg-scr-opc` command. The `pcst` parameter does not have to be specified.

If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N spare point code, the `pcst=s` parameter must be specified with the `chg-scr-opc` command.

If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N non-spare point code, the `pcst` parameter does not have to be specified with the `chg-scr-opc` command. If the `pcst` parameter is specified for a screen containing either an ITU-I or 14-bit ITU-N non-spare point code, the `pcst` parameter value must be `none`.

For this example, enter this command.

```
chg-scr-
opc:sr=wrld2:ni=243:nc=015:nncm=001:nni=230:nc=230 :nncm=230:nsfi=blkopc:n
sr=wrld6
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
CHG-SCR-OPC: SCREEN SET AFFECTED - WRD2 1% FULL
CHG-SCR-OPC: MASP A - COMPLTD
```

7. Verify the changes using the `rtrv-scr-opc` command with the screening reference name used in step 6.

For this example, enter this command.

```
rtrv-scr-opc:sr=wrld2
```

The following is an example of the possible output.


```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED OPC
SR   NI      NC      NCM      NSFI     NSR/ACT
WRD2 230      230      230      BLKOPC  WRD6
```


8. Backup the new changes using the `chg-db:action=backup:dest=fixed` command.


The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.


```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 12-4. Changing an Allowed OPC Screen

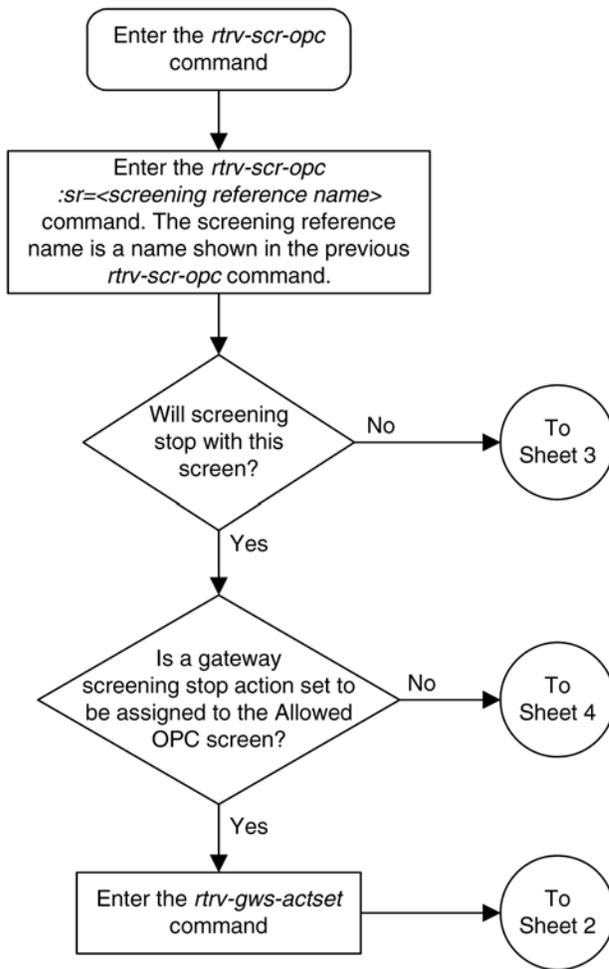

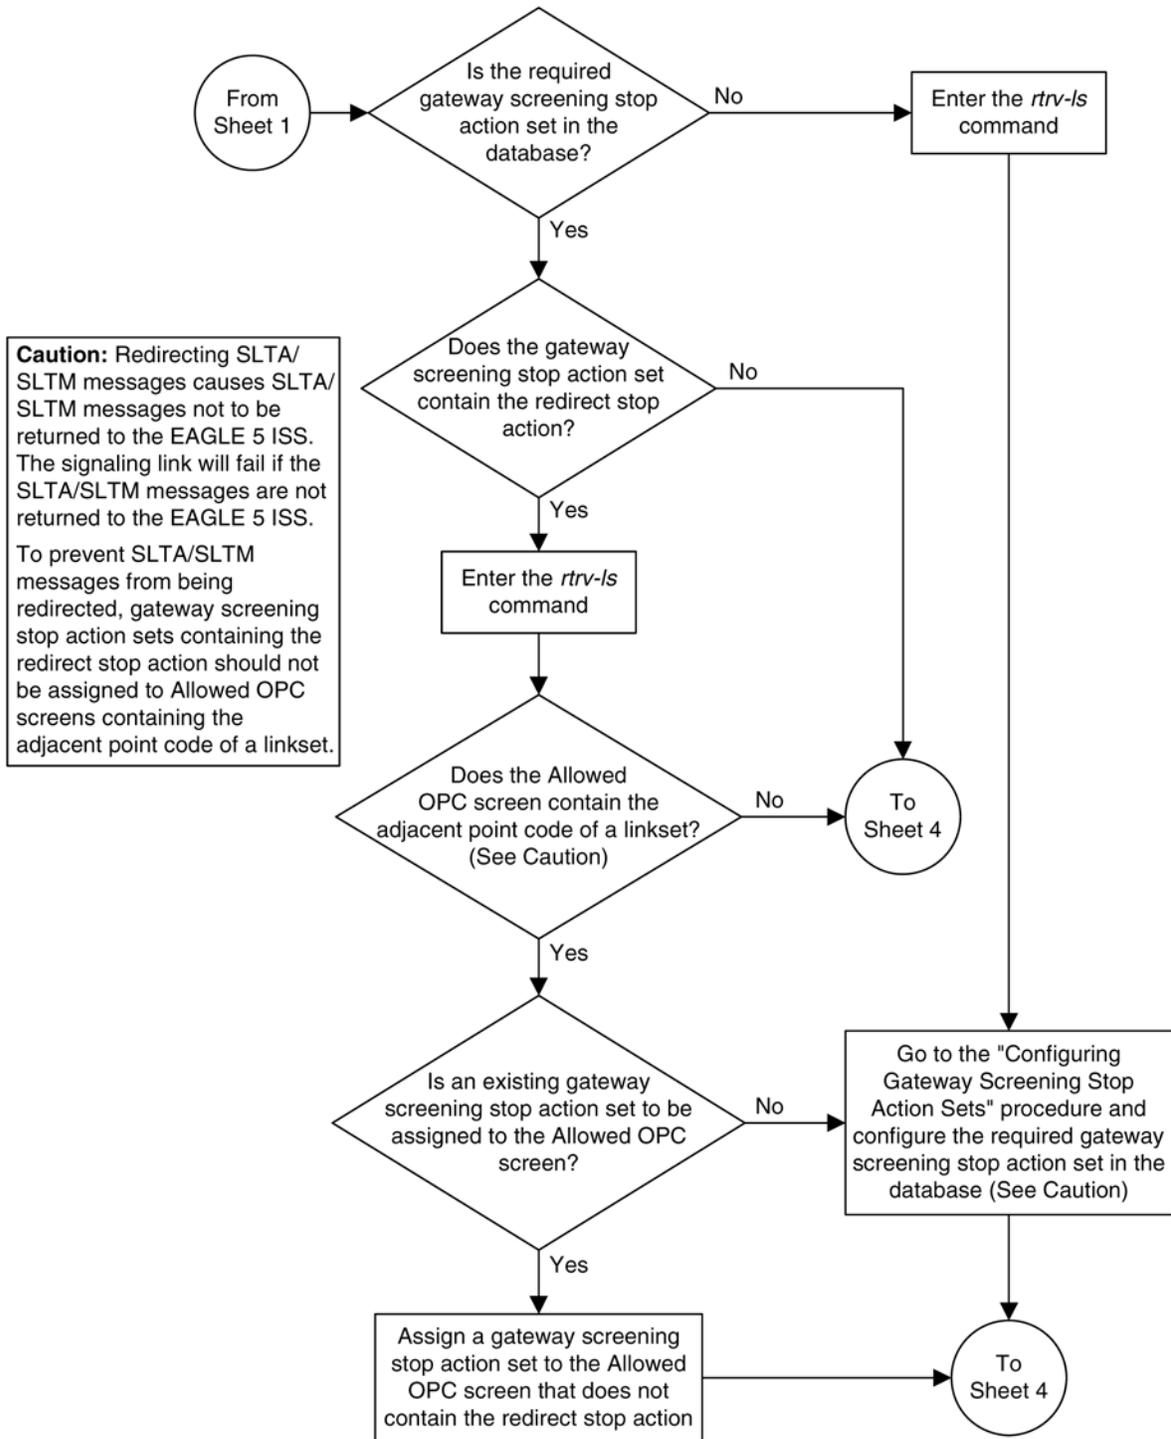

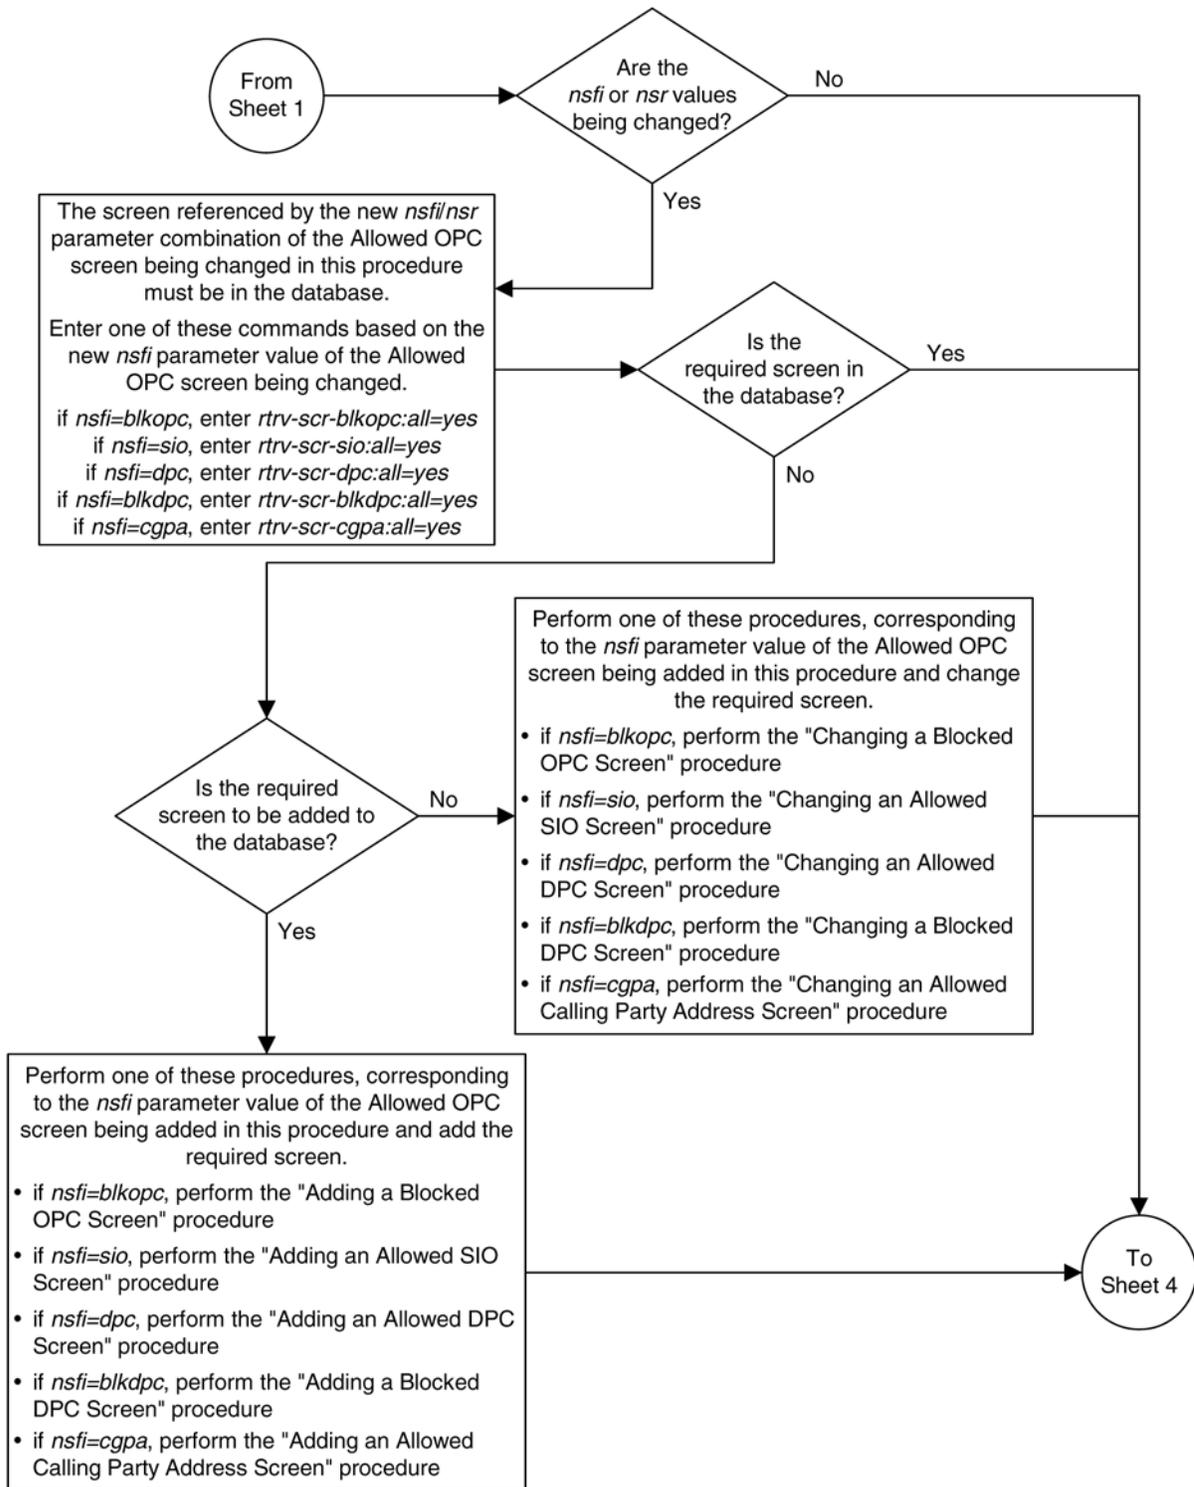



Enter the *chg-scr-opc* command with this mandatory parameter:
:sr=<screening reference name>
 and the point code parameters, depending on the point code type contained in the screen being changed. Only one point code type can be specified.

ANSI Point Code	ITU-I Point Code	14-Bit ITU-N Point Code	24-Bit ITU-N Point Code
<i>:ni=<current ni value></i>	<i>:zone=<current zone value></i>	<i>:npc=<current npc value></i>	<i>:msa=<current msa value></i>
<i>:nc=<current nc value></i>	<i>:area=<current area value></i>	<i>:pcst=<s, none></i>	<i>:ssa=<current ssa value></i>
<i>:ncm=<current ncm value></i>	<i>:id=<current id value></i>		<i>:sp=<current sp value></i>
	<i>:pcst=<s, none></i>		

At least one of these optional parameters must be specified with the *chg-scr-opc* command.

:nsfi=<blkopc, sio, dpc, blkopc, cgpa, stop>
:nsr=<next screening reference>
:actname=<GWS stop action set name>

If the new point code code parameters are specified, they must be of the same type as the current point code values specified in the *chg-scr-opc* command.

ANSI Point Code	ITU-I Point Code	14-Bit ITU-N Point Code	24-Bit ITU-N Point Code
<i>:nni=<0-255, *></i>	<i>:nzone=<0-7, *></i>	<i>:nnpc=<1-16383, *></i>	<i>:nmsa=<0-255, *></i>
<i>:nnc=<0-255, *></i>	<i>:narea=<0-255, *></i>	<i>:npcst=<s, none></i>	<i>:nssa=<0-255, *></i>
<i>:nncm=<0-255, *></i>	<i>:nid=<0-7, *></i>		<i>:nsp=<0-255, *></i>
	<i>:npcst=<s, none></i>		

(See the Notes and Caution on Sheet 6)

Enter the *rtrv-scr-opc*
:sr=<screening reference name> command

Enter the
chg-db:action=backup:dest=fixed
 command

Notes:

1. A range of values can be specified for the *ni*, *nc*, or *ncm* parameters by inserting double ampersands (&&) between the parameter values defining the range. For example, to specify the range 025 to 200 for the *ni* parameter, enter 025&&200 for the *ni* parameter value.
2. The asterisk (*) specifies the entire range of values for that parameter.
For more information about specifying a range of values and about using the asterisk, see the "Gateway Screening Attributes" section in Chapter 2 and the "Specifying a Range of Values" section in this procedure.
3. The *nsr* parameter can be specified, and must be specified, if the *nsfi* parameter value is either *blkopc*, *sio*, *dpc*, *blkdpc*, or *cgpa*.
4. The *actname* parameter is optional and can be specified only with the *nsfi=stop* parameter. If the *actname* parameter is specified, the *actname* parameter value is one of the gateway screening stop action set names shown in the *rtrv-gws-actset* output on Sheet 1.
5. To change an ITU-I or 14-bit ITU-N spare point code to a non-spare point code, both the *pcst=s* and *npcst=none* parameters must be specified with the *chg-scr-opc* command.
6. To change an ITU-I or 14-bit ITU-N non-spare point code to a spare point code, the *npcst=s* parameter must be specified with the *chg-scr-opc* command. The *pcst* parameter does not have to be specified.
7. If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N spare point code, the *pcst=s* parameter must be specified with the *chg-scr-opc* command.
8. If the current point code in the screen being changed is either an ITU-I or 14-bit ITU-N non-spare point code, the *pcst* parameter does not have to be specified with the *chg-scr-opc* command. If the *pcst* parameter is specified for a screen containing either an ITU-I or 14-bit ITU-N non-spare point code, the *pcst* parameter value must be *none*.

Caution: Redirecting SLTA/SLTM messages causes SLTA/SLTM messages not to be returned to the EAGLE 5 ISS. The signaling link will fail if the SLTA/STM messages are not returned to the EAGLE 5 ISS.

To prevent SLTA/SLTM messages from being redirected, gateway screening stop action sets containing redirect stop action should not be assigned to Allowed OPC screens containing the adjacent point code of a linkset.

Screen Set Configuration

Introduction	13-1
Automatic Destination Field Screening	13-1
Adding a Screen Set	13-2
Removing a Screen Set	13-9
Changing a Screen Set	13-11

Introduction

A screen set is a gateway screening table containing a list of rules, or screening references. The screening references indicate the screening action that is to be performed on a message in a specific linkset. These screening references are configured in Chapters [Chapter 3 Allowed Affected Point Code \(AFTPC\) Screen Configuration](#) through [Chapter 12 Allowed Originating Point Code \(OPC\) Screen Configuration](#). The screen set is assigned to a linkset. When the **gwsa=on** linkset parameter is specified for a specific linkset, all the messages on that linkset will be screened by the gateway screening feature based on the screening references contained in the screen set. For more information of the linkset parameters used for the gateway screening feature, go to the [Gateway Screening States](#) section, or to the **ent-1s** or **chg-1s** command descriptions in the *Commands Manual*.

Automatic Destination Field Screening

Network management messages can be screened automatically by gateway screening without configuring an Allowed Affected Destination Field screen. The **destfld=yes** parameter specified with the **ent-scrset** or **chg-scrset** commands turns on automatic screening of the affected destination point code (see [Figure 7-1](#)) in the network management messages. Network management messages contain the value 0 in the service indicator field of the SIO. The network management messages are screened against the routing table, the EAGLE 5 ISS's point code, and capability point codes. If the affected destination point code matches the EAGLE 5 ISS's point code, capability point codes, or point codes in the routing table, the message is allowed into the EAGLE 5 ISS. The automatic screening is applied after the last screen in the screening process, containing the **nsfi=stop** parameter, for that screen set.

These network management messages are automatically screened by gateway screening: TFP, TFA, TFR, TFC, UPU, SRST (RSP, RSR). All other network management messages are allowed into the EAGLE 5 ISS.

Adding a Screen Set

This procedure is used to add a screen set to the database using the **ent-scrset** command. The parameters used by the **ent-scrset** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

A maximum of 255 screen sets can be configured in the database. If the database contains 255 screen sets, any attempt to add another screen set with the **ent-scrset** command will be rejected. If the database contains 255 screen sets, and you wish to add another screen set, a current screen set must be removed or changed. To remove a screen set, perform the [Removing a Screen Set](#) procedure. To change an existing screen set, perform the [Changing a Screen Set](#) procedure.

The examples in this procedure are used to add the screen set data shown in [Table 13-1](#) and based on the example configurations shown in [Figure 2-3](#) through [Figure 2-9](#).

Table 13-1. Example Gateway Screening Screen Set Configuration Table

Screen Set Name	Next Screening Function Identifier	Next Screening Reference	DESTFLD
gws1	opc	gws4	No
gws2	blkopc	gws5	No
ls01	sio	ls02	Yes
wrd1	dpc	iec	Yes
fld1	opc	fld2	No
isp1	opc	isp1	No
tup1	opc	tup1	No

The screen set can reference one of the following screens.

- Allowed OPC
- Blocked OPC
- Allowed SIO
- Allowed DPC
- Blocked DPC

Verifying the Gateway Screening Configuration

Enter the following commands to verify that these screens are in the database.

- **rtrv-scr-opc:all=yes**
- **rtrv-scr-blkopc:all=yes**
- **rtrv-scr-sio:all=yes**
- **rtrv-scr-dpc:all=yes**
- **rtrv-scr-blkdpc:all=yes**

Gateway Screening Configuration Procedures

If the desired screen is not in the database, perform one of these procedures to add the desired screen to the database or change an existing screen in the database.

- [Adding an Allowed OPC Screen](#)
- [Adding a Blocked OPC Screen](#)
- [Adding an Allowed SIO Screen](#)
- [Adding an Allowed DPC Screen](#)
- [Adding a Blocked DPC Screen](#)
- [Changing an Allowed OPC Screen](#)
- [Changing a Blocked OPC Screen](#)
- [Changing an Allowed SIO Screen](#)
- [Changing an Allowed DPC Screen](#)
- [Changing a Blocked DPC Screen](#)

Procedure

1. Verify that the gateway screening feature is on, by entering the **rtrv-feat** command.

If the gateway screening feature is on, the **GWS** field is set to **on**.

NOTE: The rtrv-feat command output contains other fields that are not used by this procedure. If you wish to see all the fields displayed by the rtrv-feat command, see the rtrv-feat command description in the *Commands Manual*.

If the gateway screening feature is on, shown by the entry **GWS = on** in the **rtrv-feat** command output, skip step 2, and go to step 3.

2. Turn the gateway screening feature on by entering this command.

chg-feat:gws=on

NOTE: Once the gateway screening feature is turned on with the chg-feat command, it cannot be turned off.

The gateway screening feature must be purchased before you turn this feature on with the chg-feat command. If you are not sure if you have purchased the gateway screening feature, contact your Tekelec Sales Representative or Account Representative.

When the **chg-feat** has successfully completed, this message should appear.

```
r1ghncxa03w 06-10-28 11:43:04 GMT EAGLE5 36.0.0
CHG-FEAT: MASP A - COMPLTD
```

3. Display all the screen sets in the database using the **rtrv-scrset** command.

The following is an example of the possible output.

```
r1ghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
ENTIRE GWS DATABASE IS 1% FULL
CDPA + AFTPC TABLES ARE 1% FULL
THERE ARE 248 SCREEN SETS AVAILABLE
```

```
THE FOLLOWING ARE OVER 80% FULL:
SCRN  NSFI    NSR/ACT  FULL  RULES  TABLES  DESTFLD
SCRN  NSFI    NSR/ACT  FULL  RULES  TABLES  DESTFLD
ss01  OPC      opc1     51%   2075   22       YES
ss02  OPC      opc2     2%    75     22       YES
ss03  OPC      opc3     2%    75     22       YES
```

ss04	OPC	opc1	51%	2075	22	NO
ss07	OPC	opc1	51%	2075	22	YES
ss09	OPC	opc1	51%	2075	22	NO
ss28	OPC	opc1	51%	2075	22	YES

If a gateway screening stop action set is to be assigned to the screen set being added to the database, go to step 4.

Step 4 verifies the gateway screening stop action set names in the database. The gateway screening stop action set names are assigned only if the NSFI of the screen set being added in this procedure is STOP. If the NSFI of the new screen set will be STOP, but a gateway screening stop action set name will not be assigned to the new screen set, skip steps 4 and 5 and go to step 6. If the NSFI of the new screen set is not STOP, skip step 4 and go to step 5.

4. Display the gateway screening stop action sets in the database with the **rtrv-gws-actset** command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
ACT ACT
ID NAME 1 2 3 4 5 6 7 8 9 10
-----
1 copy copy
2 rdct rdct
3 cr copy rdct
4 cncf cncf
5 cpcncf copy cncf
6 cncfrd cncf rdct
7 cpcfrd copy cncf rdct
GWS action set table is (7 of 16) 44% full
```

If the required gateway screening stop action set is not in the database, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure to configure the required gateway screening stop action set.

NOTE: If the NSFI of the screen set being added in this procedure is STOP, skip step 5 and go to step 6.

5. Enter the commands in the [Verifying the Gateway Screening Configuration](#) section to verify that the screen that will be specified by the NSFI/NSR parameter combination in step 6 is in the database.

If the desired screen is not in the database, perform one of the procedures shown in the [Gateway Screening Configuration Procedures](#) section to add the desired screen to the database or change an existing screen in the database.

6. Add a new screen set to the database using the **ent-scrset** command.

If a gateway screening stop action is to be assigned to the screen set being added, enter the **ent-scrset** command with the **nsfi=stop** parameter and the **actname** parameter with the name of a gateway screening stop action set shown in the output of the **rtrv-gws-actset** command executed in step 4.

For this example, enter these commands.

```
ent-scrset:scrn=gws1:nsfi=opc:nsr=gws4:destfld=no
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
ENT-SCRSET: SCREEN SET AFFECTED - GWS1 1% FULL
ENT-SCRSET: MASP A - COMPLTD
```

```
ent-scrset:scrn=gws2:nsfi=blkopc:nsr=gws5:destfld=no
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
ENT-SCRSET: SCREEN SET AFFECTED - GWS2 1% FULL
ENT-SCRSET: MASP A - COMPLTD
```

ent-scrset:scrn=ls01:nsfi=sio:nsr=ls02:destfld=yes

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:29:30 GMT EAGLE5 36.0.0
ENT-SCRSET: SCREEN SET AFFECTED - LS01 1% FULL
ENT-SCRSET: MASP A - COMPLTD
```

ent-scrset:scrn=wrđ1:nsfi=dpc:nsr=iec:destfld=yes

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:30:30 GMT EAGLE5 36.0.0
ENT-SCRSET: SCREEN SET AFFECTED - WRD1 1% FULL
ENT-SCRSET: MASP A - COMPLTD
```

ent-scrset:scrn=fld1:nsfi=opc:nsr=fld2:destfld=no

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:31:30 GMT EAGLE5 36.0.0
ENT-SCRSET: SCREEN SET AFFECTED - FLD1 1% FULL
ENT-SCRSET: MASP A - COMPLTD
```

ent-scrset:scrn=isp1:nsfi=opc:nsr=isp1:destfld=no

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:31:30 GMT EAGLE5 36.0.0
ENT-SCRSET: SCREEN SET AFFECTED - ISP1 1% FULL
ENT-SCRSET: MASP A - COMPLTD
```

ent-scrset:scrn=tup1:nsfi=opc:nsr=tup1:destfld=no

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:31:30 GMT EAGLE5 36.0.0
ENT-SCRSET: SCREEN SET AFFECTED - TUP1 1% FULL
ENT-SCRSET: MASP A - COMPLTD
```

7. Verify the changes using the **rtrv-scrset** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:32:30 GMT EAGLE5 36.0.0
ENTIRE GWS DATABASE IS 1% FULL
CDPA + AFTPC TABLES ARE 1% FULL
THERE ARE 242 SCREEN SETS AVAILABLE
```

```
THE FOLLOWING ARE OVER 80% FULL:
```

SCRN	NSFI	NSR/ACT	FULL	RULES	TABLES	DESTFLD
fld1	OPC	fld2	1%	5	4	NO
gws1	OPC	gws4	1%	9	7	NO
gws2	BLKOPC	gws5	1%	5	4	NO
isp1	OPC	isp1	1%	6	4	NO
ls01	SIO	ls02	1%	3	3	YES
ss01	OPC	opc1	51%	2075	22	YES
ss02	OPC	opc2	2%	75	22	YES
ss03	OPC	opc3	2%	75	22	YES


ss04	OPC	opcl	51%	2075	22	NO
ss07	OPC	opcl	51%	2075	22	YES
ss09	OPC	opcl	51%	2075	22	NO
ss28	OPC	opcl	51%	2075	22	YES
tup1	OPC	tup1	1%	8	5	NO
wrd1	DPC	iec	1%	6	5	YES


8. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.


The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.  
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.  
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.  
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 13-1. Adding a Screen Set

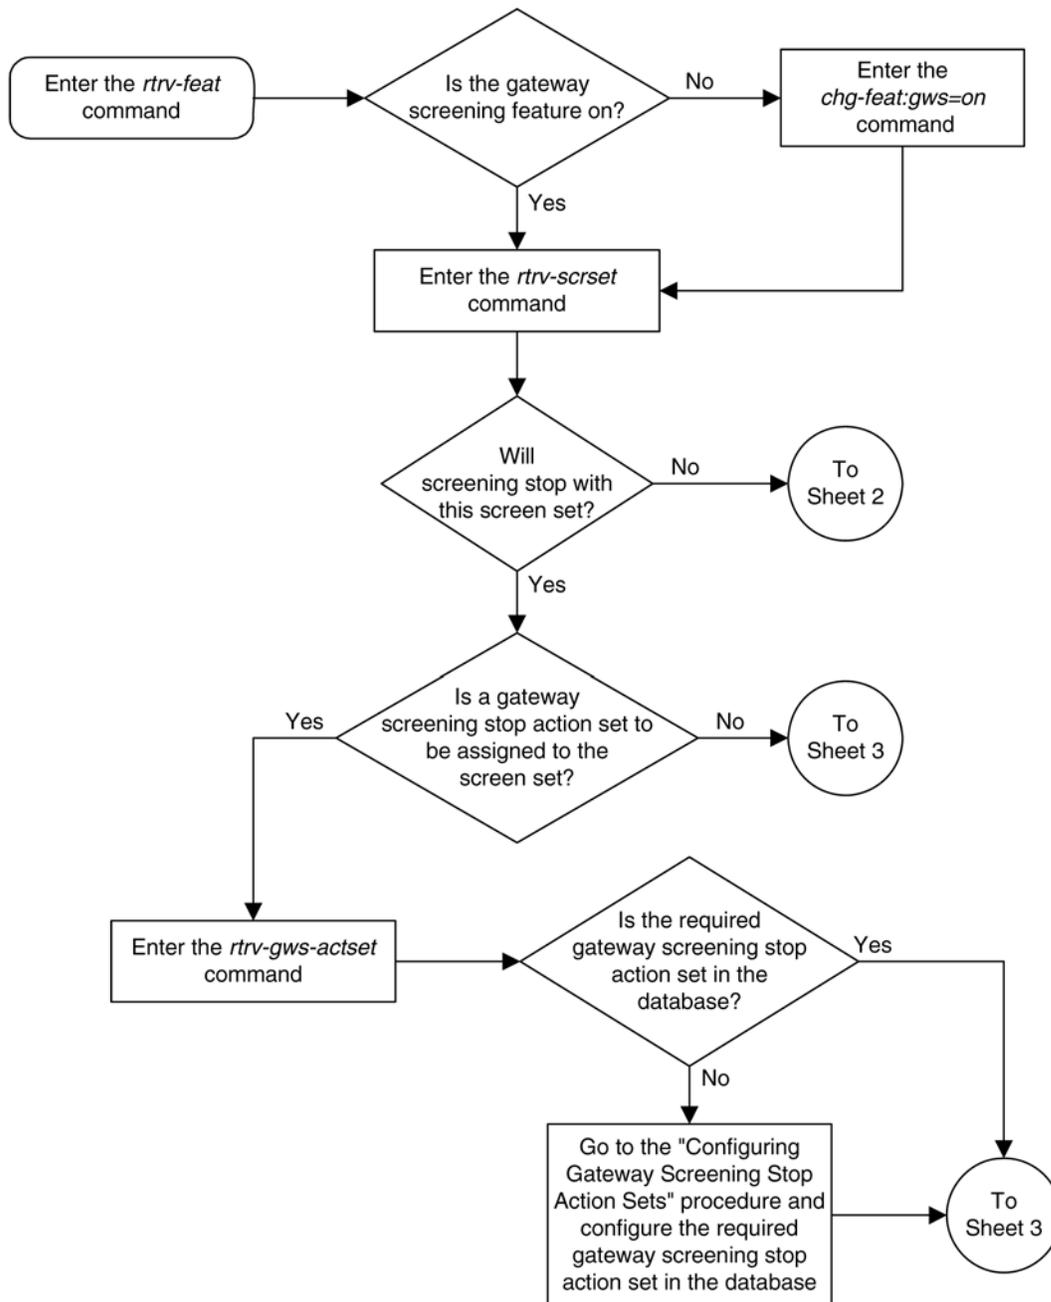

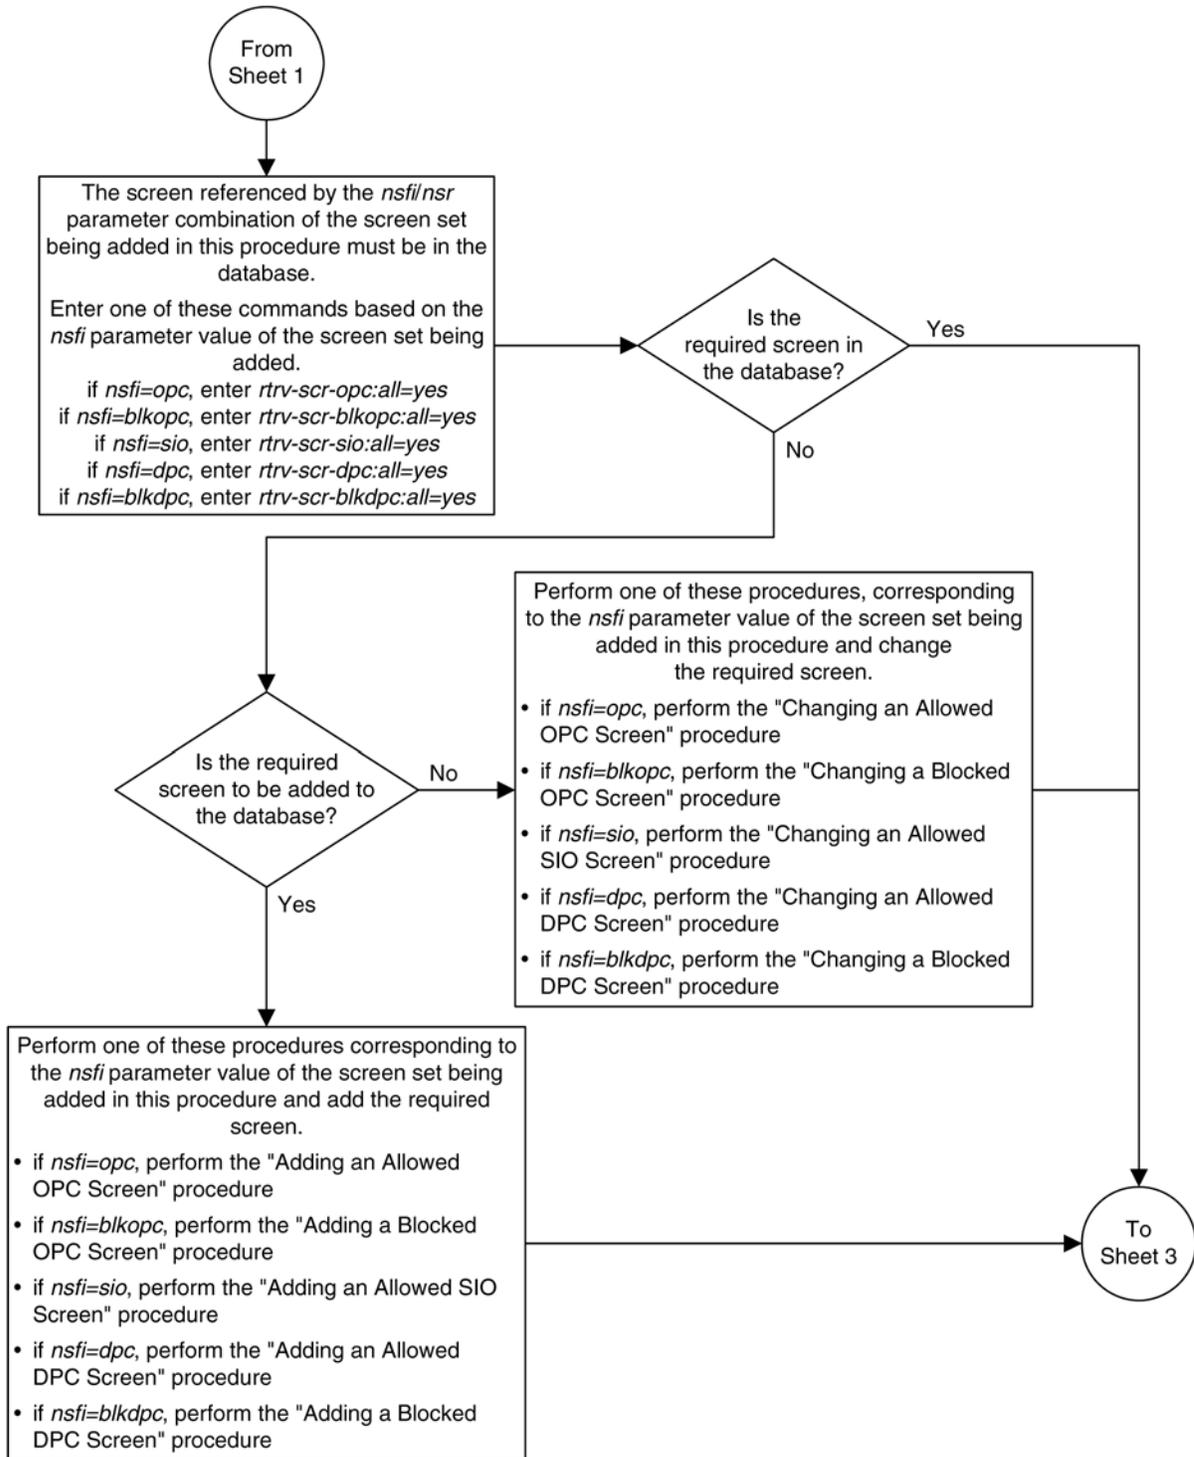

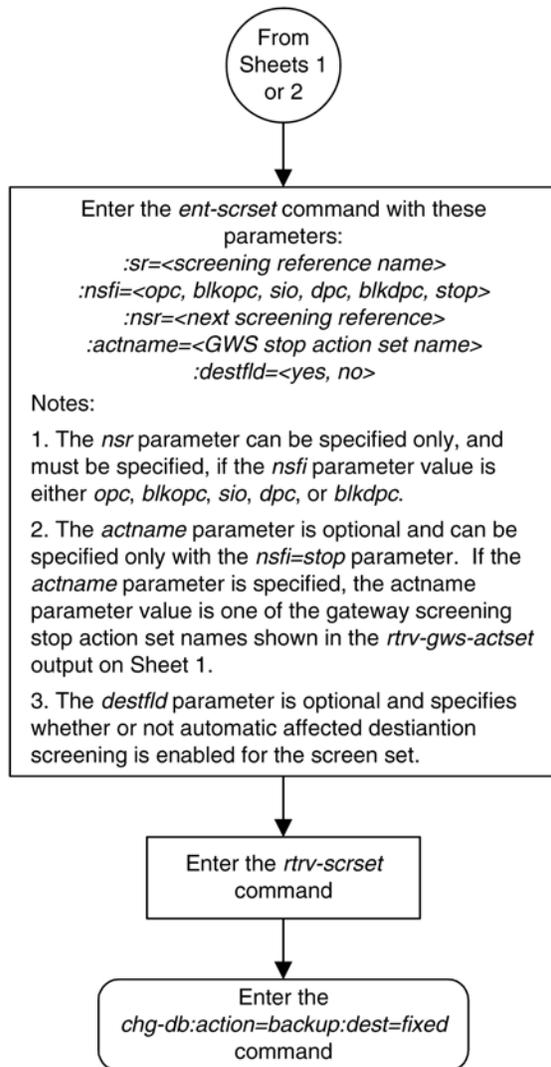

Removing a Screen Set

This procedure is used to remove a screen set from the database using the **dlt-scrset** command. The parameters used by the **dlt-scrset** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The example in this procedure removes the screen set **gws1** from the database.

Procedure

1. Display all screen sets in the database using the **rtrv-scrset** command.

The following is an example of the possible output.

```

r1ghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
ENTIRE GWS DATABASE IS 1% FULL
CDPA + AFTPC TABLES ARE 1% FULL
THERE ARE 242 SCREEN SETS AVAILABLE

```

```
THE FOLLOWING ARE OVER 80% FULL:
SCRN  NSFI    NSR/ACT  FULL  RULES  TABLES  DESTFLD

SCRN  NSFI    NSR/ACT  FULL  RULES  TABLES  DESTFLD
fld1  OPC     fld2     1%    5      4        NO
gws1  OPC     gws4     1%    9      7        NO
gws2  BLKOPC  gws5     1%    5      4        NO
isp1  OPC     isp1     1%    6      4        NO
ls01  SIO     ls02     1%    3      3        YES
ss01  OPC     opc1     51%   2075   22       YES
ss02  OPC     opc2     2%    75     22       YES
ss03  OPC     opc3     2%    75     22       YES
ss04  OPC     opc1     51%   2075   22       NO
ss07  OPC     opc1     51%   2075   22       YES
ss09  OPC     opc1     51%   2075   22       NO
ss28  OPC     opc1     51%   2075   22       YES
tup1  OPC     tup1     1%    8      5        NO
wrld1 DPC     iec      1%    6      5        YES
```

- The screen set to be removed cannot be referenced by a linkset.

To verify this, enter the **rtrv-ls** command. If the output shows a reference to the screen set to be removed, perform the Changing an SS7 Linkset procedure in the *Database Administration Manual – SS7* or the “Changing an X.25 Linkset” procedure in the *Database Administration Manual – Features* and change the **scrn** parameter to reference another screen set, or to **none** to remove the reference to the screen set.

- Remove the screen set from the database using the **dlt-scrset** command.

For this example, enter this command.

```
dlt-scrset:scrn=gws1
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
DLT-SCRSET: SCREEN SET AFFECTED - GWS1 0% FULL
DLT-SCRSET: MASP A - COMPLTD
```

- Verify the changes using the **rtrv-scrset** command with the screen set name used in step 3.

For this example, enter this command.

```
rtrv-scrset:scrn=gws1
```

The following is an example of the possible output.

```
E2573 Cmd Rej: SR or NSR does not reference an existing SR
```


This message shows that the specified screen set name is not in the database and the action of the **dlt-scrset** command in step 3 was successful.

- Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 13-2. Removing a Screen Set

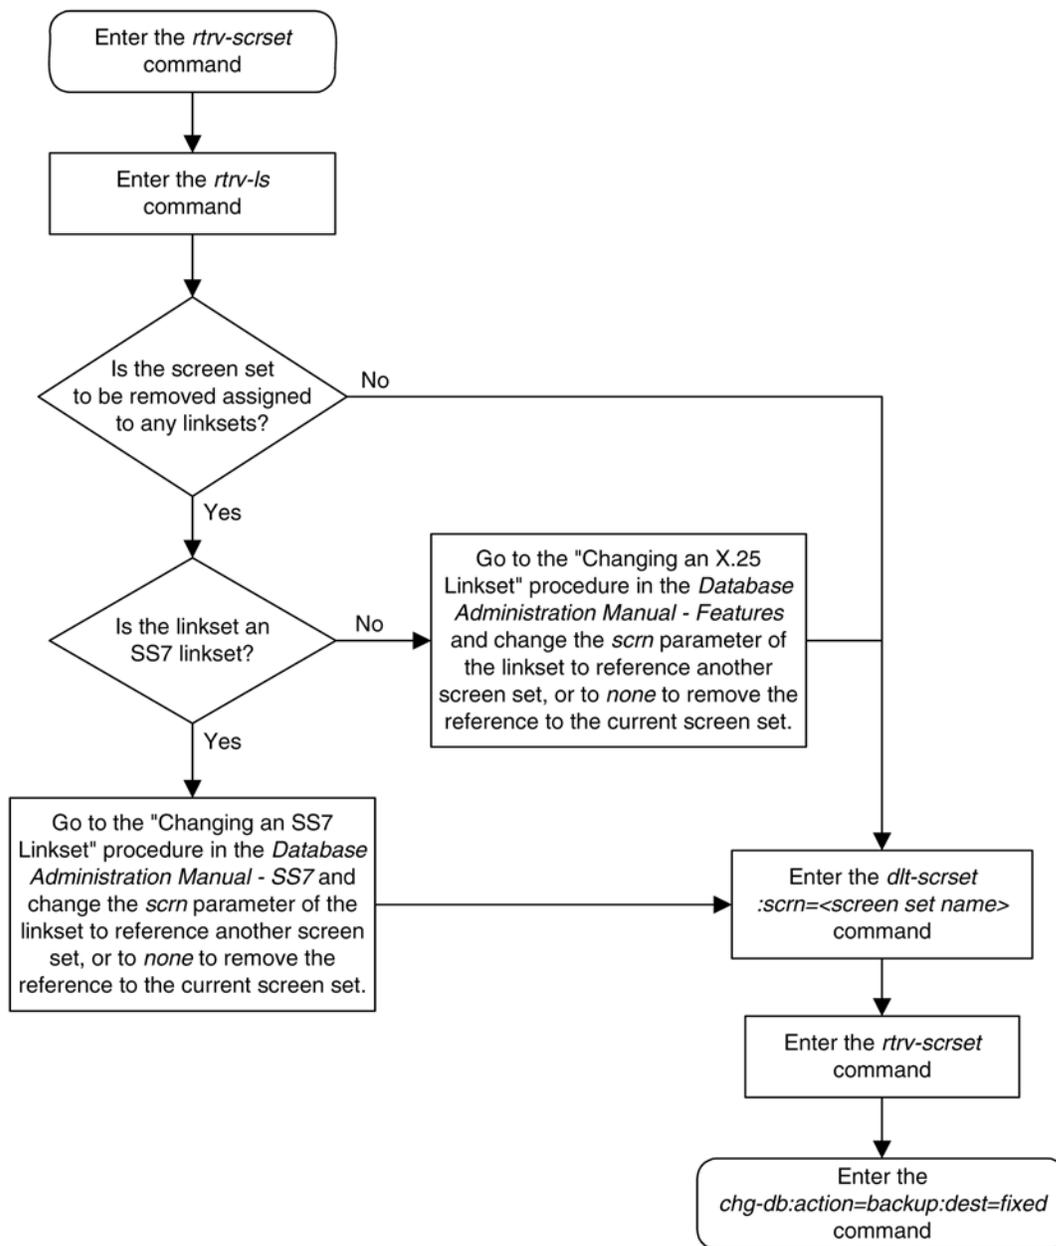

Changing a Screen Set

This procedure is used to change the attributes of a screen set in the database using the **chg-scrset** command. The parameters used by the **chg-scrset** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The example in this procedure is used to change screen set **ls01** to screen set **ls05** with the **nsfi=blkopc** and **nsr=ls08**.

If the screen set name is being changed, the new screen set name cannot already exist in the database.

The screen set can reference one of the following screens.

- Allowed OPC
- Blocked OPC
- Allowed SIO
- Allowed DPC
- Blocked DPC

Verifying the Gateway Screening Configuration

Enter the following commands to verify that these screens are in the database.

- `rtrv-scr-opc:all=yes`
- `rtrv-scr-blkopc:all=yes`
- `rtrv-scr-sio:all=yes`
- `rtrv-scr-dpc:all=yes`
- `rtrv-scr-blkdpc:all=yes`

Gateway Screening Configuration Procedures

If the desired screen is not in the database, perform one of the following procedures to add the desired screen to the database or change an existing screen in the database.

- [Adding an Allowed OPC Screen](#)
- [Adding a Blocked OPC Screen](#)
- [Adding an Allowed SIO Screen](#)
- [Adding an Allowed DPC Screen](#)
- [Adding a Blocked DPC Screen](#)
- [Changing an Allowed OPC Screen](#)
- [Changing a Blocked OPC Screen](#)
- [Changing an Allowed SIO Screen](#)
- [Changing an Allowed DPC Screen](#)
- [Changing a Blocked DPC Screen](#)

Procedure

1. Display all screen sets in the database using the `rtrv-scrset` command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
ENTIRE GWS DATABASE IS 1% FULL
CDPA + AFTPC TABLES ARE 1% FULL
THERE ARE 242 SCREEN SETS AVAILABLE

THE FOLLOWING ARE OVER 80% FULL:
SCRN  NSFI    NSR/ACT  FULL  RULES  TABLES  DESTFLD
```

SCRN	NSFI	NSR/ACT	FULL	RULES	TABLES	DESTFLD
fld1	OPC	fld2	1%	5	4	NO
gws1	OPC	gws4	1%	9	7	NO
gws2	BLKOPC	gws5	1%	5	4	NO
isp1	OPC	isp1	1%	6	4	NO
ls01	SIO	ls02	1%	3	3	YES
ss01	OPC	opc1	51%	2075	22	YES
ss02	OPC	opc2	2%	75	22	YES
ss03	OPC	opc3	2%	75	22	YES
ss04	OPC	opc1	51%	2075	22	NO
ss07	OPC	opc1	51%	2075	22	YES
ss09	OPC	opc1	51%	2075	22	NO
ss28	OPC	opc1	51%	2075	22	YES
tup1	OPC	tup1	1%	8	5	NO
wrd1	DPC	iec	1%	6	5	YES

- The screen set being changed cannot be referenced by a linkset.

To verify this, enter the **rtrv-ls** command. If the output shows a reference to the screen set to be removed, perform the Changing an SS7 Linkset procedure in the *Database Administration Manual – SS7* or the “Changing an X.25 Linkset” procedure in the *Database Administration Manual – Features* and change the **scrn** parameter to reference another screen set, or to **none** to remove the reference to the screen set.

NOTE: If a new gateway screening stop action set will not be assigned to the screen set being changed, skip step 3 and go to step 4.

- Display the gateway screening stop action sets in the database with the **rtrv-gws-actset** command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
ACT  ACT
ID  NAME  1    2    3    4    5    6    7    8    9    10
---  ---
1    copy  copy
2    rdct  rdct
3    cr    copy rdct
4    cncf  cncf
5    cpcncf copy cncf
6    cncfrd cncf rdct
7    cpcfrd copy cncf rdct
```

GWS action set table is (7 of 16) 44% full

If the required gateway screening stop action set is not in the database, go to the [Configuring Gateway Screening Stop Action Sets](#) procedure and configure the required gateway screening stop action set.

NOTE: If the NSFI of the screen set being changed in this procedure will be STOP, or if the NSFI of the screen set is not being changed, skip step 4 and go to step 5.

- Enter the commands in the [Verifying the Gateway Screening Configuration](#) section to verify that the screen that will be specified by the NSFI/NSR parameter combination in step 5 is in the database.

If the desired screen is not in the database, perform one of the procedures shown in the [Gateway Screening Configuration Procedures](#) section to add the desired screen to the database or change an existing screen in the database.

- Change the attributes of a screen set using the **chg-scrset** command.

If a gateway screening stop action is to be assigned to the screen set being changed, enter the **chg-scrset** command with the **nsfi=stop** parameter and the **actname** parameter with the name of a gateway screening stop action set shown in the output of the **rtrv-gws-actset** command executed in step 2.

For this example, enter this command.

```
chg-scrset:scrn=ls01:nsrn=ls05:nsfi=blkopc:nsr=ls08
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
CHG-SCRSET: SCREEN SET AFFECTED - LS01 1% FULL
CHG-SCRSET: MASP A - COMPLTD
```

6. Verify the changes using the **rtrv-scrset** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
ENTIRE GWS DATABASE IS 1% FULL
CDPA + AFTPC TABLES ARE 1% FULL
THERE ARE 242 SCREEN SETS AVAILABLE
```

```
THE FOLLOWING ARE OVER 80% FULL:
SCRN  NSFI    NSR/ACT  FULL  RULES  TABLES  DESTFLD


SCRN  NSFI    NSR/ACT  FULL  RULES  TABLES  DESTFLD
fld1  OPC     fld2     1%    5      4        NO
gws1  OPC     gws4     1%    9      7        NO
gws2  BLKOPC  gws5     1%    5      4        NO
isp1  OPC     isp1     1%    6      4        NO
ls05  BLKOPC  ls08     3%    45     14       YES
ss01  OPC     opc1     51%   2075   22       YES
ss02  OPC     opc2     2%    75     22       YES
ss03  OPC     opc3     2%    75     22       YES
ss04  OPC     opc1     51%   2075   22       NO
ss07  OPC     opc1     51%   2075   22       YES
ss09  OPC     opc1     51%   2075   22       NO
ss28  OPC     opc1     51%   2075   22       YES
tup1  OPC     tup1     1%    8      5        NO
wrld1 DPC     iec      1%    6      5        YES
```


7. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.


The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 13-3. Changing a Screen Set

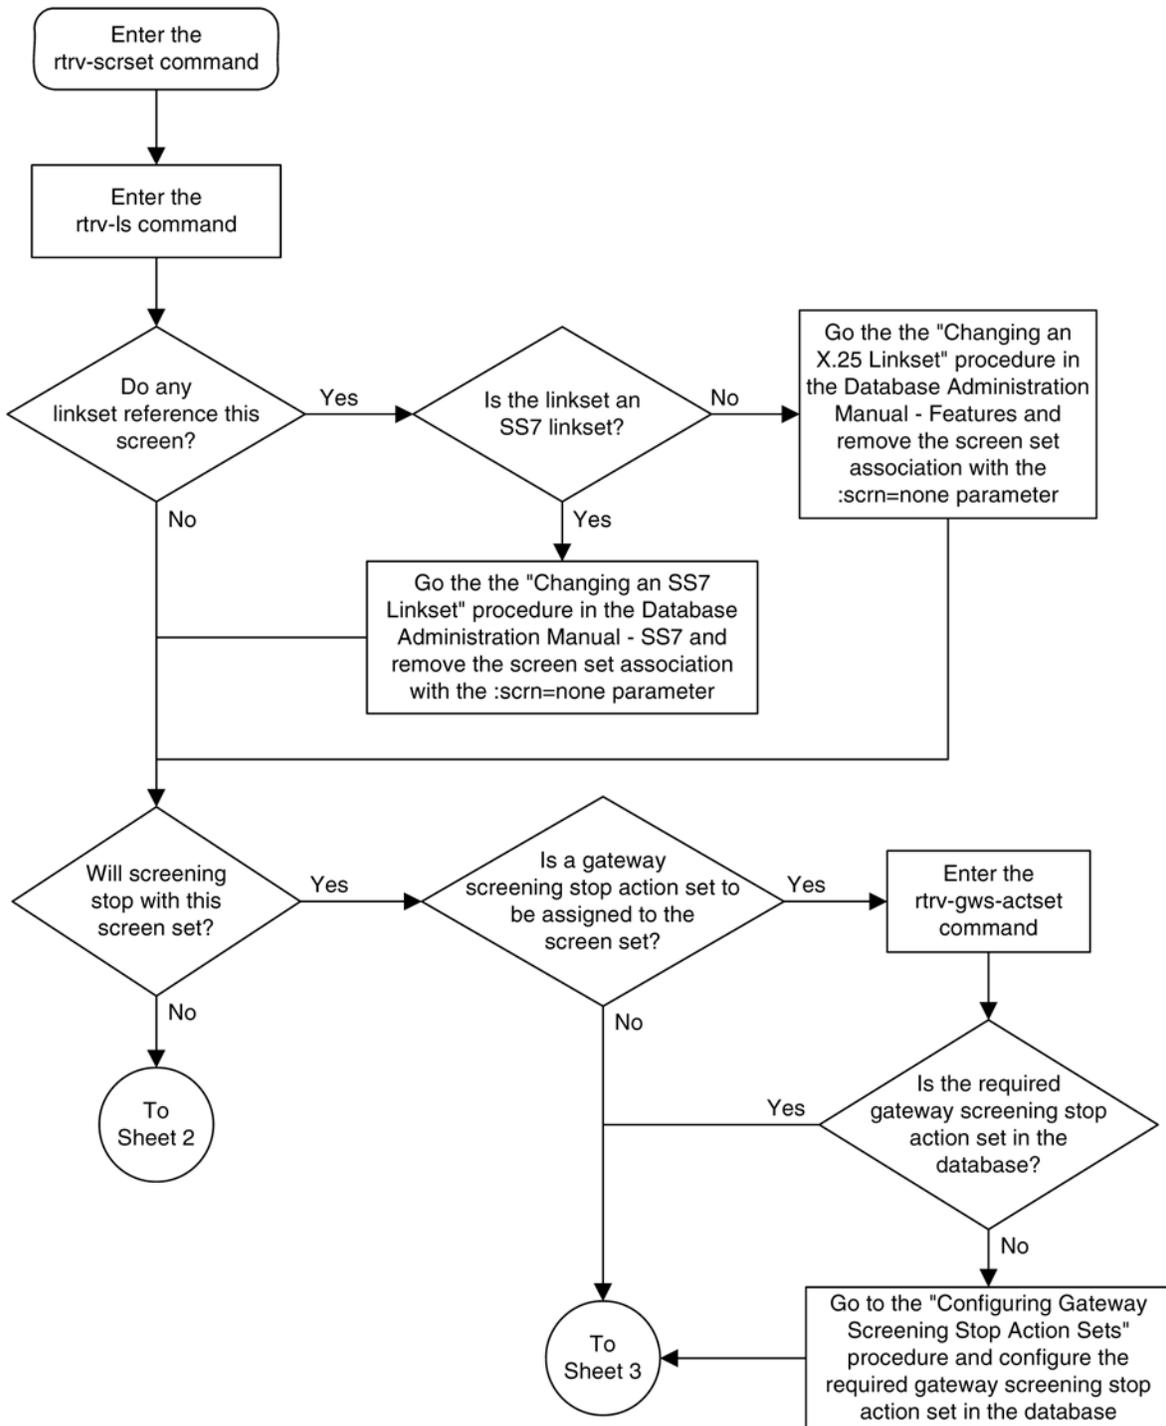

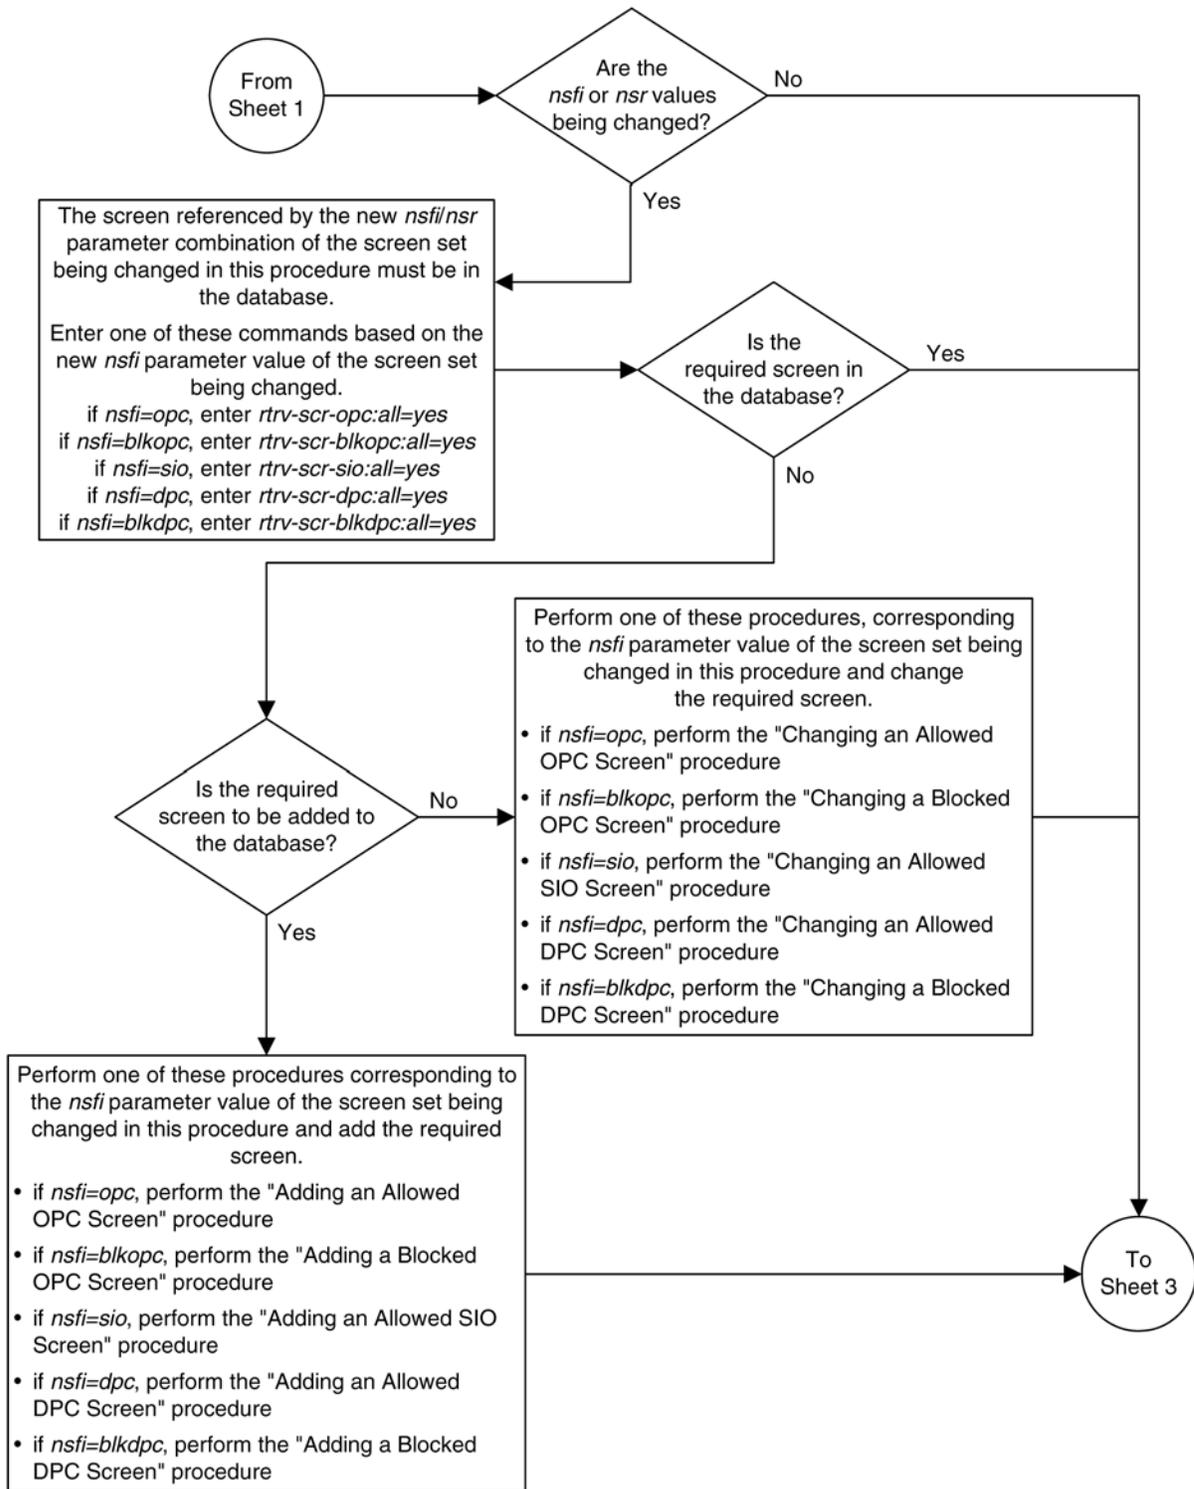

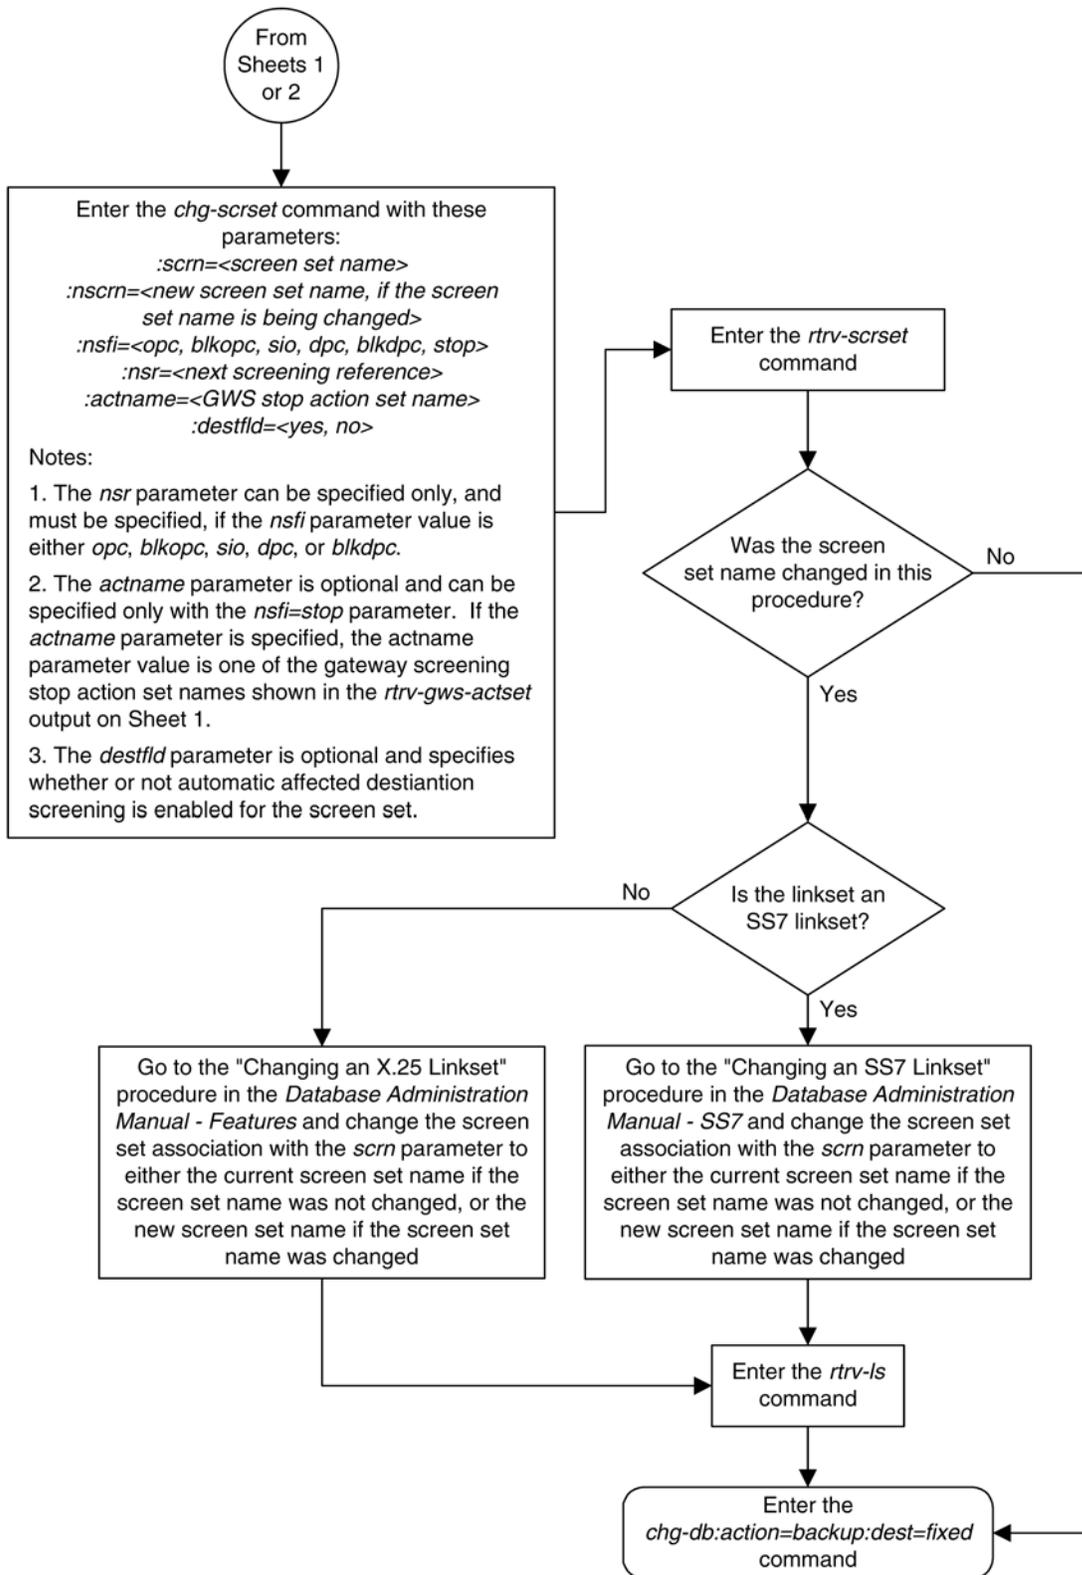

Calling Name Conversion Facility (CNCF) Configuration

Introduction	14-1
Configuring the EAGLE 5 ISS for the CNCF Feature	14-3


Introduction

This feature provides a conversion of ISUP IAM messages using two versions of calling name identification presentation (CNIP) for calling name information delivery. One version of the CNIP uses the non-standard proprietary ISUP party information (PIP) parameter. The other version uses the ANSI standard ISUP generic name (GN) parameter. The conversion will either replace the PIP parameter with the GN parameter or the GN parameter with the PIP parameter in the ISUP IAM message.

The gateway screening feature is used to select the ISUP messages that are converted. The incoming messages are selected based on the OPC and DPC in the routing label of the message, and the message type in the service information octet. The message type is defined by the value of the service indicator (SI) field of the SIO. ISUP messages contain the value 5 in the service indicator field of the SIO. Screening rules for Allowed OPC, Allowed DPC, and the Allowed SIO entities must be configured in the database for this feature.

This feature is an optional feature and must be turned on with the **chg-feat** command and the **cncf=on** parameter. The **rtrv-feat** command can be used to verify if this feature is on or not. This feature applies to only ANSI networks.

[Figure 14-1](#) shows an example network which contains these two separate ISUP versions. Based on this example, [Table 14-1](#) shows when the ISUP IAM message conversion by the CNCF feature occurs.

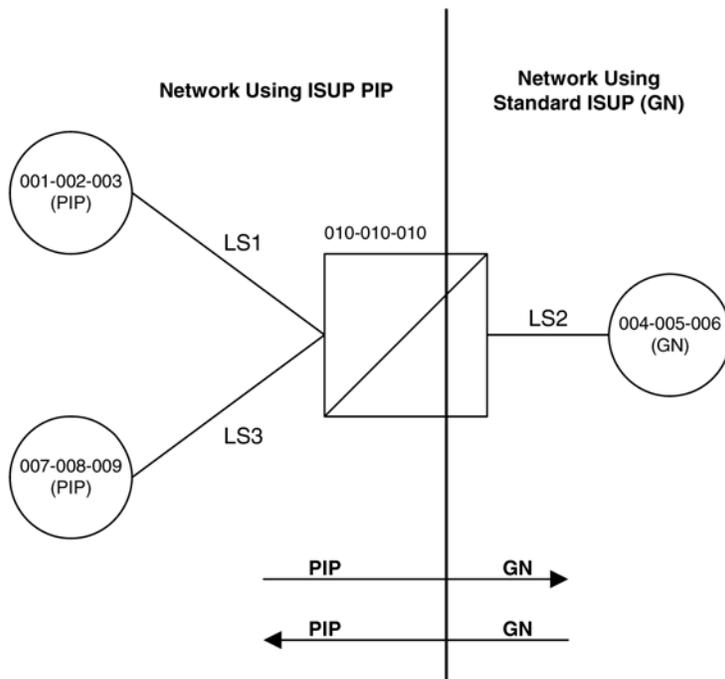Figure 14-1. PIP/GN Parameter Conversion**Table 14-1.** ISUP IAM Message Conversion Examples

Origination Point Code	Destination Point Code	ISUP IAM Message Conversion
001-002-003	004-005-006	Yes
001-002-003	007-008-009	No
004-005-006	001-002-003	Yes
004-005-006	007-008-009	Yes
007-008-009	001-002-003	No
007-008-009	004-005-006	Yes

Great care must be taken when configuring the gateway screening rules for this feature. The CNCF feature has no way to validate the gateway screening rules to detect errors in converting messages between compatible networks. For example, using the example network in [Figure 14-1](#), the ISUP IAM message traffic from node 001-002-003 to node 007-008-009 does not need to be converted because they are using the same calling name delivery parameter, PIP. If the gateway screening rules are not carefully configured, these messages could be converted when they do not need to be.

No measurements are collected showing the number of MSUs converted by this feature.

If both the **COPY** and **CNCF** gateway screening stop actions are specified as the stop actions for the gateway screening process, the MSU is converted by the CNCF feature, then copied for the STPLAN feature.

If both the **RDCT** and **CNCF** gateway screening stop actions are specified as the stop actions for the gateway screening process, the MSU is converted by the CNCF feature, then redirected for the DTA feature.

If there are multiple PIP parameters or GN parameters with calling name information within a single ISUP IAM, only the first occurrence of the parameter in the ISUP IAM message is converted.

Messages on X.25 linksets cannot be converted with the CNCF feature.

Only GN IAM messages containing calling name information (Type of Name = Calling Name, Presentation = Allowed, Parameter Length >1) are converted to PIP IAM messages.

Only PIP IAM messages containing Calling Name Information (Sub-Parameter Code = Name Information, Name Element Indicator = Calling Party) are converted to GN IAM messages.

If the received IAM message contains both a GN and a PIP parameter with calling name information, the GN parameter is retransmitted and the PIP parameter is deleted.

Any MSU that is not converted is simply retransmitted. These MSUs include non-ISUP MSUs, non-IAM MSUs, and any IAM MSU received that doesn't contain either a GN or PIP parameter.

If the PIP parameter contains other information in addition to the calling party name information, only a GN parameter containing calling party name information is generated.

The linkset being screened for this feature should not contain C links (**lst=c** parameter of the **ent-1s** and **chg-1s** commands). This would result in the double conversion of the ISUP IAM messages.

Configuring the EAGLE 5 ISS for the CNCF Feature

To configure the EAGLE 5 ISS for the CNCF feature, gateway screening rules for Allowed OPC, Allowed DPC, and the Allowed SIO entities must be configured in the database for this feature. The last entity in the screening process (**nsfi=stop**) must have a gateway screening stop action set containing the **CNCF** gateway screening stop action.

The allowed OPC screening rules must contain the OPCs that the ISUP IAM messages are being sent from.

The allowed DPC screening rules must contain the DPCs that the ISUP IAM messages are being sent to.

The allowed SIO screening rules must contain the ISUP message type, defined by the **si=5** parameter.

The CNCF feature must be turned on. Before the CNCF feature can be turned on, the gateway screening feature must be on. This can be verified with the **rtrv-feat** command.

The examples in this procedure are based on [Figure 14-2](#) , [Figure 14-3](#) , [Figure 14-4](#) , [Figure 14-5](#) , [Table 14-1](#) , [Table 14-2](#) , [Table 14-3](#) , [Table 14-4](#) , [Table 14-5](#) , and [Table 14-6](#) .

Figure 14-2. CNCF Gateway Screening Configuration - Example 1

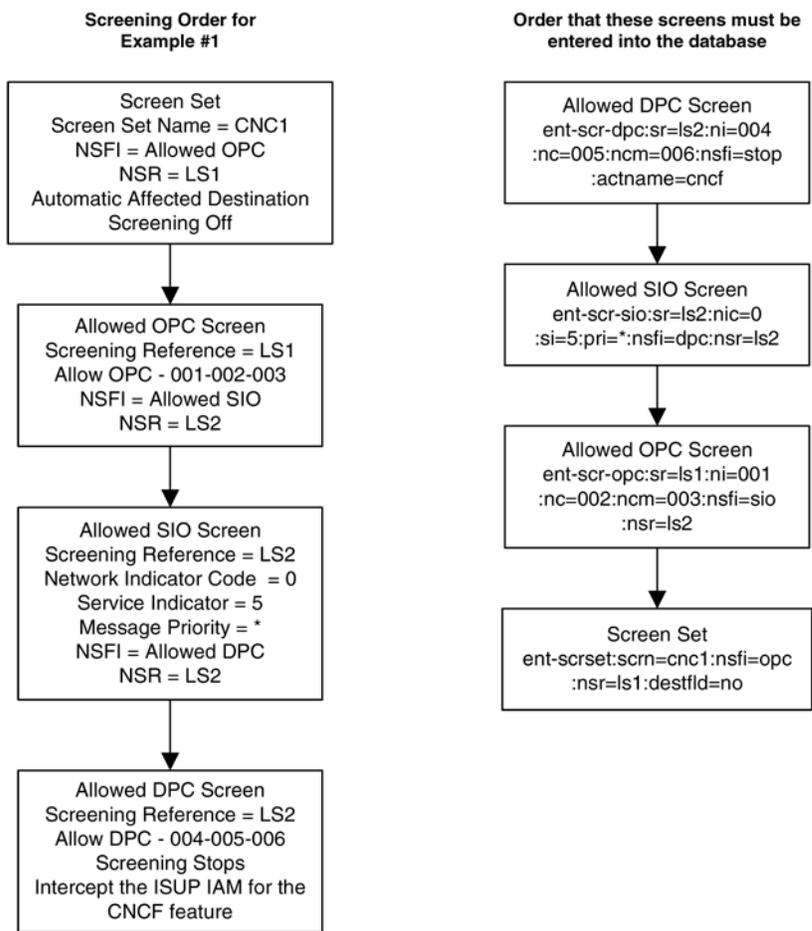


Figure 14-3. CNCF Gateway Screening Configuration - Example 2

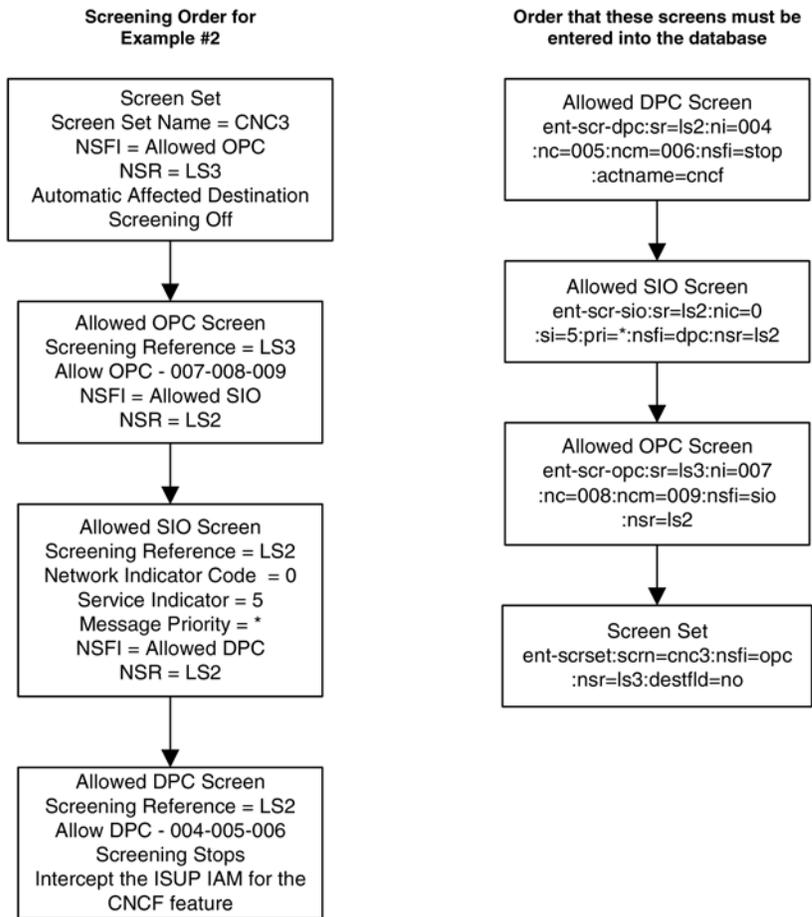


Figure 14-4. CNCF Gateway Screening Configuration - Example 3


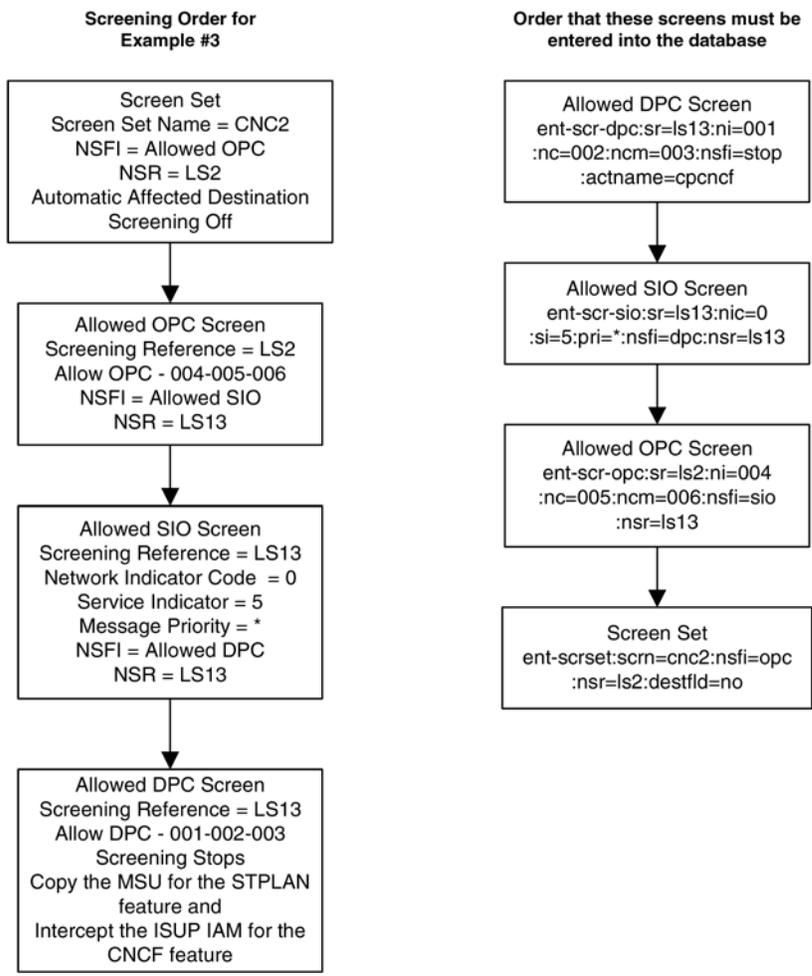


Figure 14-5. CNCF Gateway Screening Configuration - Example 4

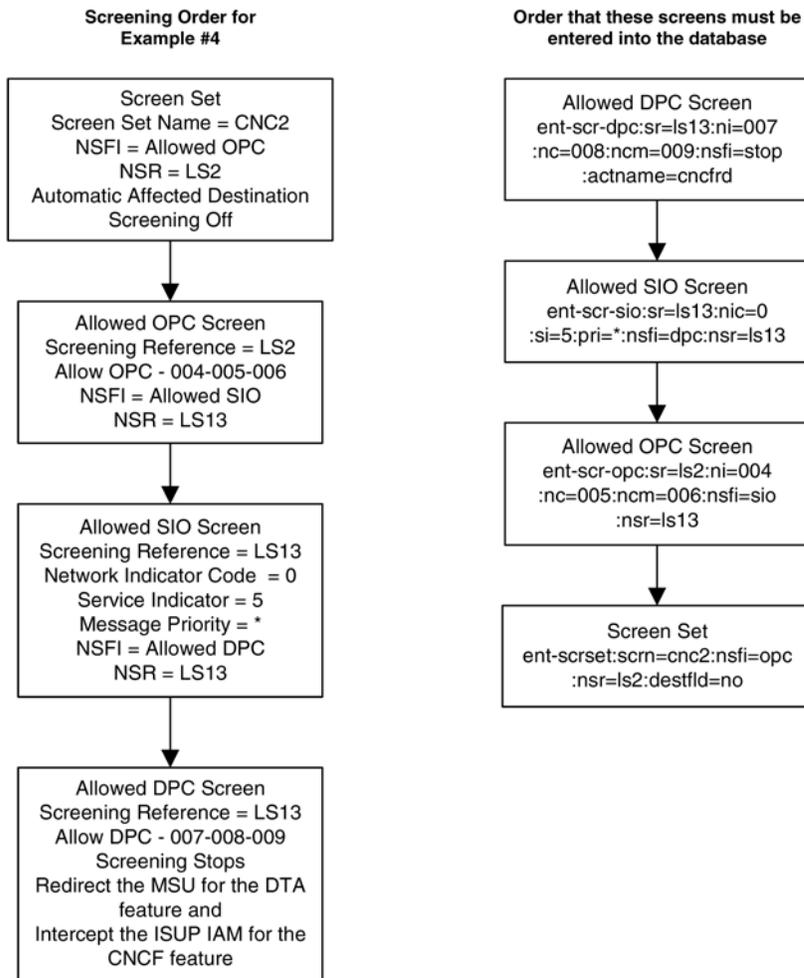

Canceling the RTRV-LS Command

Because the **rtrv-ls** command used in this procedure can output information for a long period of time, the **rtrv-ls** command can be canceled and the output to the terminal stopped. There are three ways that the **rtrv-ls** command can be canceled.

- Press the **F9** function key on the keyboard at the terminal where the **rtrv-ls** command was entered.
- Enter the **canc-cmd** without the **trm** parameter at the terminal where the **rtrv-ls** command was entered.
- Enter the **canc-cmd:trm=<xx>**, where **<xx>** is the terminal where the **rtrv-ls** command was entered, from another terminal other than the terminal where the **rtrv-ls** command was entered. To enter the **canc-cmd:trm=<xx>** command, the terminal must allow Security Administration commands to be entered from it and the user must be allowed to enter Security Administration commands. The terminal's permissions can be verified with the **rtrv-secu-trm** command. The user's permissions can be verified with the **rtrv-user** or **rtrv-secu-user** commands.

For more information about the **canc-cmd** command, go to the *Commands Manual*.

Procedure

Configuring the EAGLE 5 ISS for the CNCF Feature Database Administration Manual - Gateway Screening

1. Verify that the gateway screening and the calling name conversion facility features are on, by entering the **rtrv-feat** command.

If the gateway screening feature is on, the **GWS** field should be set to **on**. If the calling name conversion facility feature is on, the **CNCF** field should be set to **on**. For this example, the gateway screening and the calling name conversion facility features are off.

NOTE: The rtrv-feat command output contains other fields that are not used by this procedure. If you wish to see all the fields displayed by the rtrv-feat command, see the rtrv-feat command description in the *Commands Manual*.

If both features are on, go to step 4. If the gateway screening feature is on, but the calling name conversion facility feature is off, go to step 3. If the gateway screening feature is off, go to step 2.

2. If the gateway screening feature is not on, shown by the **GWS = off** entry in the **rtrv-feat** command output in step 1, turn the gateway screening feature on by entering this command.

```
chg-feat:gws=on
```

NOTE: Once the gateway screening feature is turned on with the chg-feat command, it cannot be turned off.

When the **chg-feat** has successfully completed, this message should appear.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
CHG-FEAT: MASP A - COMPLTD
```

3. If the calling name conversion facility feature is not on, shown by the **CNCF = off** entry in the **rtrv-feat** command output in step 1, turn the calling name conversion facility feature on by entering this command.

```
chg-feat:cncf=on
```

NOTE: Once the calling name conversion facility feature is turned on with the chg-feat command, it cannot be turned off.

When the **chg-feat** has successfully completed, this message should appear.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
CHG-FEAT: MASP A - COMPLTD
```

4. Display the gateway screening stop action sets in the database with the **rtrv-gws-actset** command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
ACT ACT
ID NAME 1 2 3 4 5 6 7 8 9 10
--
1 copy copy
2 rdct rdct
3 cr copy rdct
4 cncf cncf
5 epncf copy cncf
6 cncfrd cncf rdct
7 epcf rd copy cncf rdct
```

```
GWS action set table is (7 of 16) 44% full
```

If the **cncf** gateway screening stop action is not shown in the **rtrv-gws-actset** command output, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure to create a new gateway screening

stop action set containing the **cncf** gateway screening stop action, or change an existing gateway screening stop action set to contain the **cncf** gateway screening stop action.

5. Display all allowed DPC screens in the database using the **rtrv-scr-dpc** command.

The following is an example of the possible output.

```
r1ghncxa03w 06-10-25 15:29:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED DPC
SR   REF  RULES
IEC  YES   2
WRD2 YES   1
WRD4 YES   9
```

If the necessary screening reference name is shown in the **rtrv-scr-dpc** command output, make sure the screening data you wish to enter is not already in the database by entering the **rtrv-scr-dpc** command with the screening reference name. For example, enter the **rtrv-scr-dpc:sr=iec** command.

The following is an example of the possible output.

```
r1ghncxa03w 06-10-25 15:30:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED DPC
SR   NI      NC      NCM      NSFI      NSR/ACT
IEC  240      001      010      STOP      -----
IEC  241      010      *        CGPA      cg04
SR   NPC
IEC  00235
IEC  00240
SR   ZONE    AREA    ID      NSFI      NSR/ACT
IEC  1        003     4       BLKDPC    blk1
IEC  1        003     5       STOP      -----
```

6. If the required screen is not in the database, perform the [Adding an Allowed DPC Screen](#) procedure to add the required allowed DPC screen.

For this example, enter the screening information in [Table 14-2](#) .

Table 14-2. Example Gateway Screening Allowed DPC Configuration Table for the CNCF Feature

Screening Reference	NI	NC	NCM	NSFI	ACTNAME*
ls2	004	005	006	Stop	CNCF
ls13	001	002	003	Stop	CPCNCF
ls13	007	008	009	Stop	CNCFRD
* The value of the actname parameter is shown in the rtrv-gws-actset command output example shown in step 4.					

If you wish to change an existing allowed DPC screen, instead of adding a new allowed DPC screen, perform the [Changing an Allowed DPC Screen](#) procedure to change an existing allowed DPC screen. For this example, change the screens with the screening information in [Table 14-2](#) .

7. Display all allowed SIO screens in the database using the **rtrv-scr-sio** command.

The following is an example of the possible output.

```
r1ghncxa03w 06-10-25 15:31:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED SIO
SR   REF  RULES
IEC  YES   2
```

```
WRD2 YES 1
WRD4 YES 9
```

If the necessary screening reference name is shown in the **rtrv-scr-sio** command output, make sure the screening data you wish to enter is not already in the database by entering the **rtrv-scr-sio** command with the screening reference name. For example, enter the **rtrv-scr-sio:sr=iec** command.

The following is an example of the possible output.

```
r1ghncxa03w 06-10-25 15:32:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED SIO
SR  NIC  PRI  SI  H0  H1  NSF1  NSR/ACT
IEC  2    0&&3  0  0    0    BLKDPC  WDB2
IEC  2    0&&2  0  1    1    DPC     WDB3
IEC  2    0&&1  0  2    2    STOP    -----
IEC  2    0&&3  4  --   --   STOP    -----
IEC  2    0&&2  1  *    *    DPC     WDB3
```

8. If the required screen is not in the database, perform the [Adding an Allowed SIO Screen](#) procedure to add the required allowed SIO screen.

For this example, enter the screening information in [Table 14-3](#) .

Table 14-3. Example Gateway Screening Allowed SIO Configuration Table for the CNCF Feature

Screening Reference	NIC	SI	H0	H1	PRI	NSFI	NSR
ls2	0	5	--	--	*	dpc	ls2
ls13	0	5	--	--	*	dpc	ls13

If you wish to change an existing allowed SIO screen, instead of adding a new allowed SIO screen, perform the [Changing an Allowed SIO Screen](#) procedure to change an existing allowed SIO screen. For this example, change the screens with the screening information in [Table 14-3](#) .

9. Display all allowed OPC screens in the database using the **rtrv-scr-opc** command.

The following is an example of the possible output.

```
r1ghncxa03w 06-10-25 15:33:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED OPC
SR  REF  RULES
IEC  YES  2
WRD2 YES  1
WRD4 YES  9
```

If the necessary screening reference name is shown in the **rtrv-scr-opc** command output, make sure the screening data you wish to enter is not already in the database by entering the **rtrv-scr-opc** command with the screening reference name. For example, enter the **rtrv-scr-opc:sr=iec** command.

The following is an example of the possible output.

```
r1ghncxa03w 06-10-25 15:34:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED OPC
SR  NI  NC  NCM  NSF1  NSR/ACT
IEC  240  001  010  STOP  -----
IEC  241  010  *    CGPA  cg04
SR  NPC
IEC  00235  CGPA  cg04
IEC  00240  CGPA  cg01
SR  ZONE  AREA  ID  NSF1  NSR/ACT
```

```
IEC 1 003 4 BLKOPC blk1
IEC 1 003 5 STOP -----
```

- If the required screen is not in the database, perform the [Adding an Allowed OPC Screen](#) procedure to add the required allowed OPC screen.

For this example, enter the screening information in [Table 14-4](#) .

Table 14-4. Example Gateway Screening Allowed OPC Configuration Table for the CNCF Feature

Screening Reference	NI	NC	NCM	NSFI	NSR
ls1	001	002	003	sio	ls2
ls2	004	005	006	sio	ls13
ls3	007	008	009	sio	ls2

If you wish to change an existing allowed OPC screen, instead of adding a new allowed OPC screen, perform the [Changing an Allowed OPC Screen](#) procedure to change an existing allowed OPC screen. For this example, change the screens with the screening information in [Table 14-4](#) .

- Display all the screen sets in the database using the `rtrv-scrset` command.

The following is an example of the possible output.

```
r1ghncxa03w 06-10-25 15:35:30 GMT EAGLE5 36.0.0
ENTIRE GWS DATABASE IS 1% FULL
CDPA + AFTPC TABLES ARE 1% FULL
THERE ARE 248 SCREEN SETS AVAILABLE

THE FOLLOWING ARE OVER 80% FULL:
SCRN NSFI NSR/ACT FULL RULES TABLES DESTFLD

SCRN NSFI NSR/ACT FULL RULES TABLES DESTFLD
ss01 OPC opc1 51% 2075 22 YES
ss02 OPC opc2 2% 75 22 YES
ss03 OPC opc3 2% 75 22 YES
ss04 OPC opc1 51% 2075 22 NO
ss07 OPC opc1 51% 2075 22 YES
ss09 OPC opc1 51% 2075 22 NO
ss28 OPC opc1 51% 2075 22 YES
```

- If the required screen set is not in the database, perform the [Adding a Screen Set](#) procedure to add the required screen set.

For this example, enter the screening information in [Table 14-5](#) .

Table 14-5. Example Gateway Screening Screen Set Configuration Table for the CNCF Feature

Screen Set Name	Next Screening Function Identifier	Next Screening Reference	DESTFLD
cnc1	opc	ls1	No
cnc2	opc	ls2	No
cnc3	opc	ls3	No

If you wish to change an existing screen set, instead of adding a new screen set, perform the [Changing a Screen Set](#) procedure to change an existing screen set. For this example, change the screen sets with the screening information in [Table 14-5](#) .

- Display the current linkset configuration using the `rtrv-ls` command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:36:30 GMT EAGLE5 36.0.0

LSN          APCA  (SS7)  SCR1  L3T SLT          GWS GWS GWS
lsal         240-020-000 scr1   1   1  yes A   1   off off off no  off
lsa2         240-030-000 scr2   1   2  no  C   3   on  on  on yes  off
lsa3         240-040-000 scr3   1   3  yes C   5   off off off yes off

LSN          APCA  (X25)  SCR4  L3T SLT          GWS GWS GWS
ls6          244-010-004 scr4   1   4  no  A   6   off off off --- off
ls7          244-012-005 scr5   1   5  no  C   3   on  on  on --- off
ls8          244-012-006 scr6   1   6  no  C   8   off off off --- off

LSN          APCI  (SS7)  SCR1  L3T SLT          GWS GWS GWS
lsi1         1-111-1     scr1   1   1  yes A   1   off off off --- ---
lsi2         1-111-2     scr2   1   2  no  C   3   on  on  on --- ---
lsi3         1-111-3     scr3   1   3  yes C   5   off off off --- ---

LSN          APCN  (SS7)  SCR1  L3T SLT          GWS GWS GWS
lsn1         11111      scr1   1   1  yes A   1   off off off --- off
lsn2         11112      scr2   1   2  no  C   3   on  on  on --- off
lsn3         11113      scr3   1   3  yes C   5   off off off --- off

Link set table is ( 12 of 1024) 1% full
```

- If the required linkset is not in the database, perform the Adding an SS7 Linkset in the *Database Administration Manual – SS7* to add the required linkset.

For this example, enter the linkset information in [Table 14-6](#) .

Table 14-6. Linkset Configuration Table for the CNCF Feature

Linkset Name	Linkset APC	# LINKS	LST	GWSA	GWSM	SCRN
ls1	001-002-003	2	B	on	off	cnc1
ls2	004-005-006	2	B	on	off	cnc2
ls3	007-008-009	2	B	on	off	cnc3


If you wish to change an existing linkset, instead of adding a new linkset, perform the Changing an SS7 Linkset procedure in the *Database Administration Manual – SS7* to change an existing linkset. For this example, change the linksets with the information in [Table 14-6](#) .


- Backup the new changes using the `chg-db:action=backup:dest=fixed` command.


The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```


Flowchart 14-1. Calling Name Conversion Facility Configuration

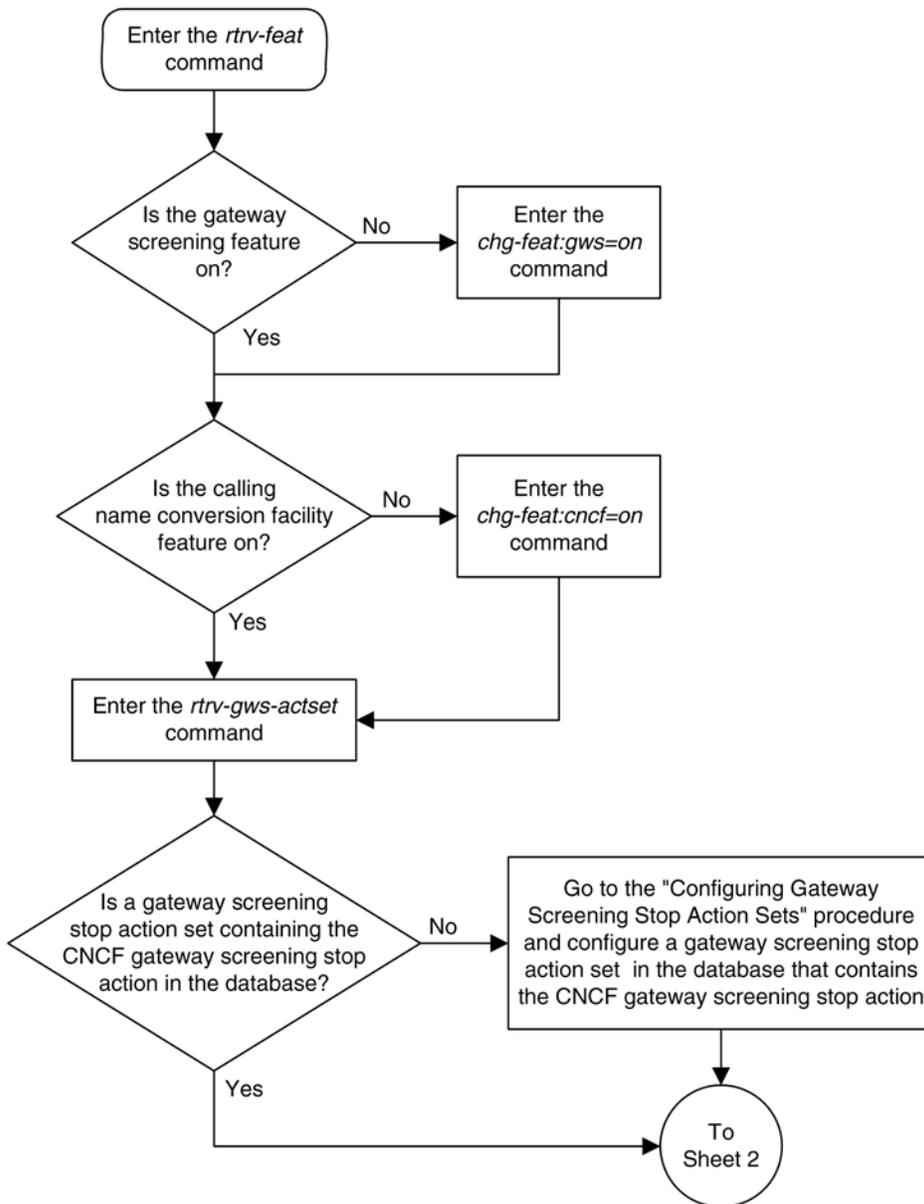

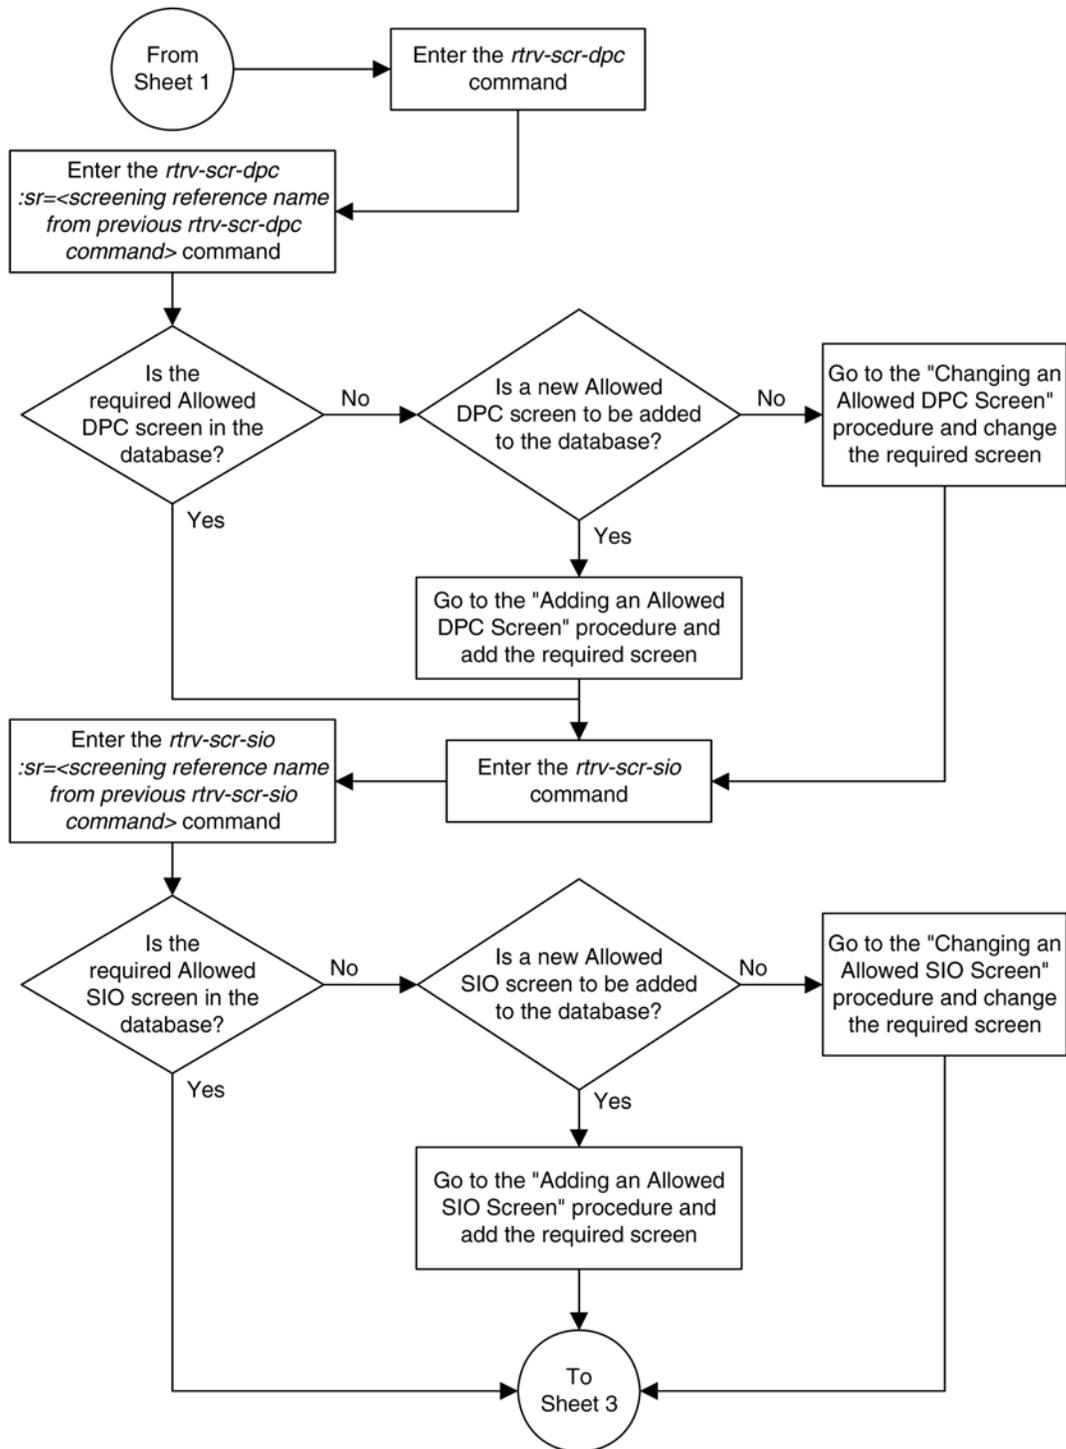

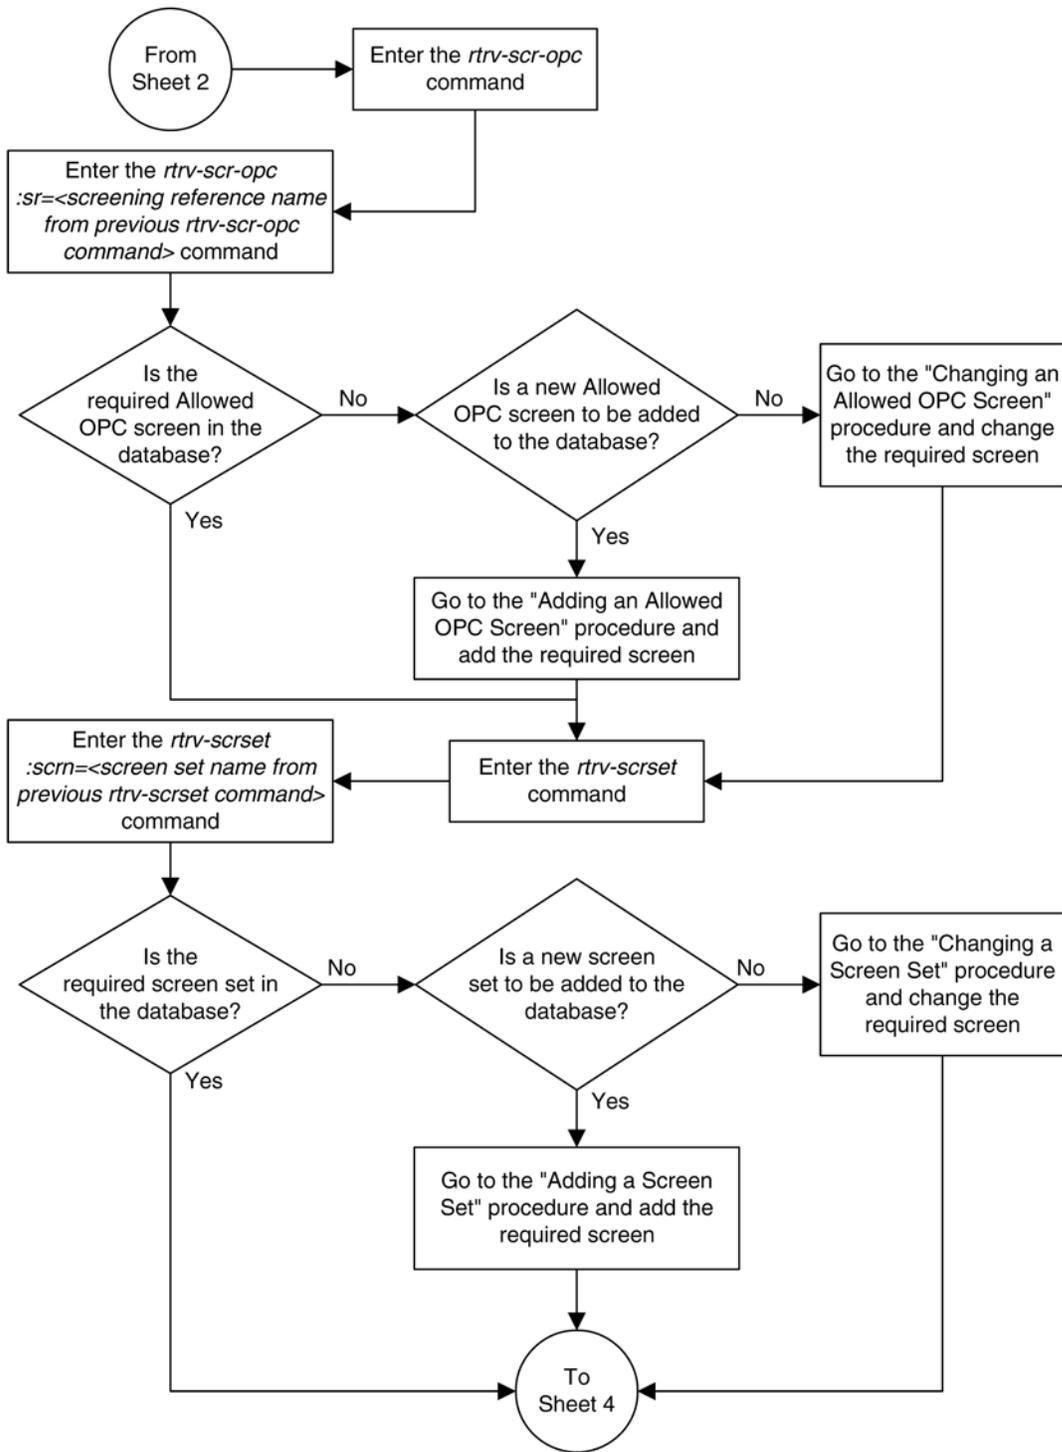

Configuring the EAGLE 5 ISS for the CNCF Feature Database Administration Manual - Gateway Screening

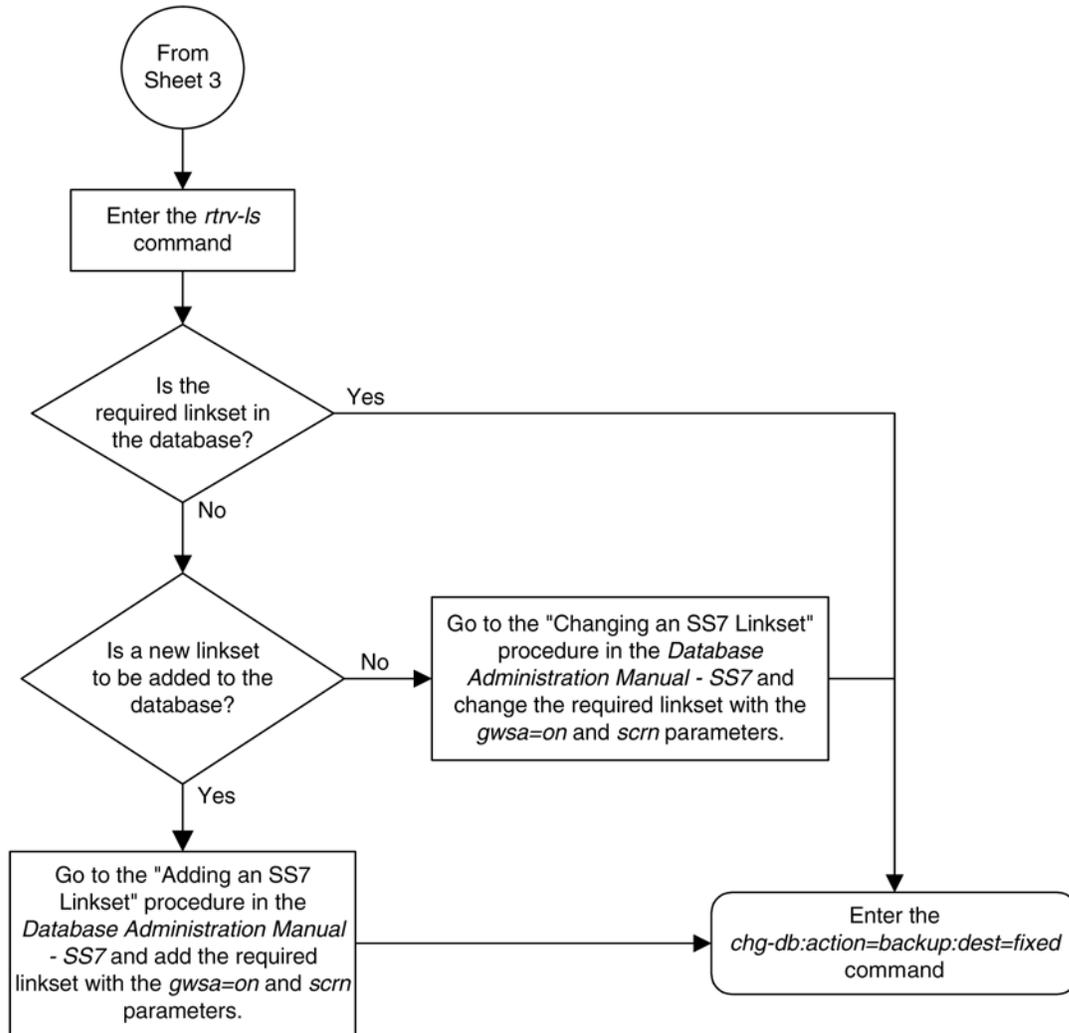

Allowed ISUP Message Type Screen Configuration

Introduction	15-1
TUP Message Screening	15-2
Adding an Allowed ISUP Message Type Screen	15-8
Removing an Allowed ISUP Message Type Screen	15-14
Changing an Allowed ISUP Message Type Screen	15-17

Introduction

The ISUP Message Type screen identifies which ISUP messages, using the ISUP message type, that are allowed into the EAGLE 5 ISS. The gray shaded areas in [Figure 15-1](#) shows the fields of the SS7 message that are checked by the ISUP Message Type screening function.

If no match is found, the MTP network management message is not allowed into the EAGLE 5 ISS. If a match is found, the message is allowed into the EAGLE 5 ISS for further processing.

If the **copy** gateway screening stop action is specified, the message is processed and a copy of the message is sent by the STPLAN feature to an external application.

If the **rdct** (redirect) gateway screening stop action is specified, the message is diverted from the original destination and sent to another destination with the Database Transport Access feature, specified by global title translation, for further processing.

If the Calling Name Conversion Facility (CNCF) feature is on and the **cncf** gateway screening stop action is specified, the PIP parameter in the incoming ISUP IAM message is converted to the GN parameter. The GN parameter in the incoming ISUP IAM message is converted to the PIP parameter. The message is then sent to the node specified by the DPC in the routing label in the message. For more information on the Calling Name Conversion Facility feature, see [Chapter 14 Calling Name Conversion Facility \(CNCF\) Configuration](#).

If the Triggerless LNP (TLNP) feature is on and the **tlnp** gateway screening stop action is specified, ISUP IAMs that pass gateway screening are processed either by the ISUP NP with EPAP feature (if the ISUP NP with EPAP feature is enabled and turned on) or by the Triggerless LNP feature (if the Triggerless LNP feature is turned on). The ISUP NP with EPAP feature is discussed in more detail in the *Feature Manual - G-Port*. The Triggerless LNP feature is discussed in more detail in the *LNP Feature Activation Guide*.

If the Triggerless ISUP based Number Portability (TINP) feature is enabled, the **nsfi** is equal to **stop**, and the **tinp** gateway screening stop action is specified, ISUP IAMs that pass gateway screening are intercepted by the

Triggerless ISUP based Number Portability (TINP) feature and converted to include the routing number (RN) if the call is to a ported number. The TINP feature is discussed in more detail in the *Feature Manual - G-Port*.

TUP Message Screening

TUP messages are screened using the Allowed ISUP Message Type screen. The TUP protocol is an obsolete predecessor to the ISUP protocol that remains in use in some areas. To screen for TUP messages, a screen set must be defined to screen for messages containing the service indicator value of 4. This is accomplished by defining an allowed SIO screen in the screen set containing the **si=4** parameter.

Since both ISUP and TUP messages are screened using the allowed ISUP message type screen, it is recommended that the screen set contain an allowed SIO screen to screen for ISUP messages, messages containing the service indicator value of 5. Each of these entries in the allowed SIO screen should have separate next screening functions. This allows the screening rules after the allowed SIO screen to have two separate streams, one that ends with screening ISUP messages, the other that ends with screening TUP messages.

The TUP messages can be screened for point codes before, with the allowed and blocked OPC screens, and after the SIO screen, with the allowed and blocked DPC screens. However, if the screen set does not contain an allowed SIO screen that screens for TUP messages (messages with the service indicator value of 4), the message will be treated by the allowed ISUP message type screen as an ISUP message.

The following commands show how a screen set can be provisioned to screen for TUP and ISUP messages.


```
ent-scr-isup:sr=is01:isupmt=10:nsfi=stop
ent-scr-isup:sr=tu01:tupmt=1:nsfi=stop
ent-scr-dpc:sr=dpc4:ni=1:nc=2:ncm=3:nsfi=isup:nsr=tu01
ent-scr-dpc:sr=dpc5:ni=7:nc=1:ncm=0:nsfi=isup:nsr=is01
ent-scr-sio:sr=si02:nic=2:pri=0:si=4:nsfi=dpc:nsr=dpc4
ent-scr-sio:sr=si02:nic=2:pri=0:si=5:nsfi=dpc:nsr=dpc5
ent-scrset:scrn=ist2:nsr=si02:nsfi=sio
```


In this example screen set configuration, messages are screened by the allowed SIO screen **si02** for either ISUP or TUP messages. ISUP messages are further screened by the allowed DPC screen **dpc5** and TUP messages are screened by the allowed DPC screen **dpc4**. The ISUP messages containing the ANSI point code 001-002-003 are passed onto the allowed ISUP screen **is01**. The TUP messages containing the ANSI point code 007-001-000 are passed onto the allowed ISUP screen **tu01**.


NOTE: The gateway screening rules are entered in reverse of the order that the screening process takes place.


[Flowchart 15-52](#) shows the screening action of the allowed ISUP message type screen.

Flowchart 15-1. Allowed ISUP Message Type Screening Action

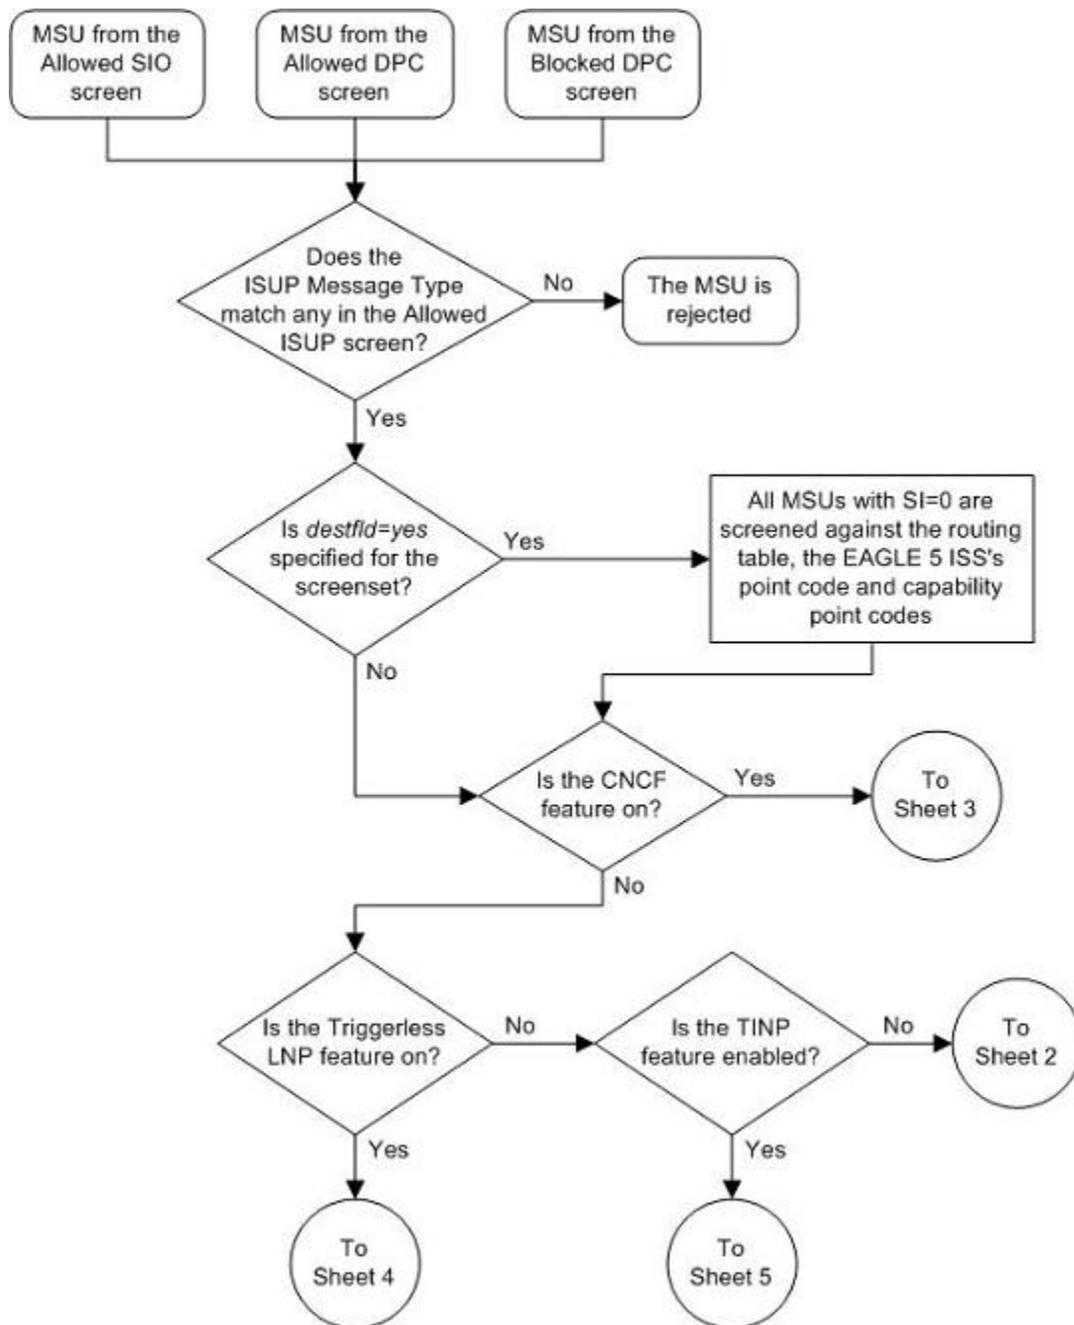

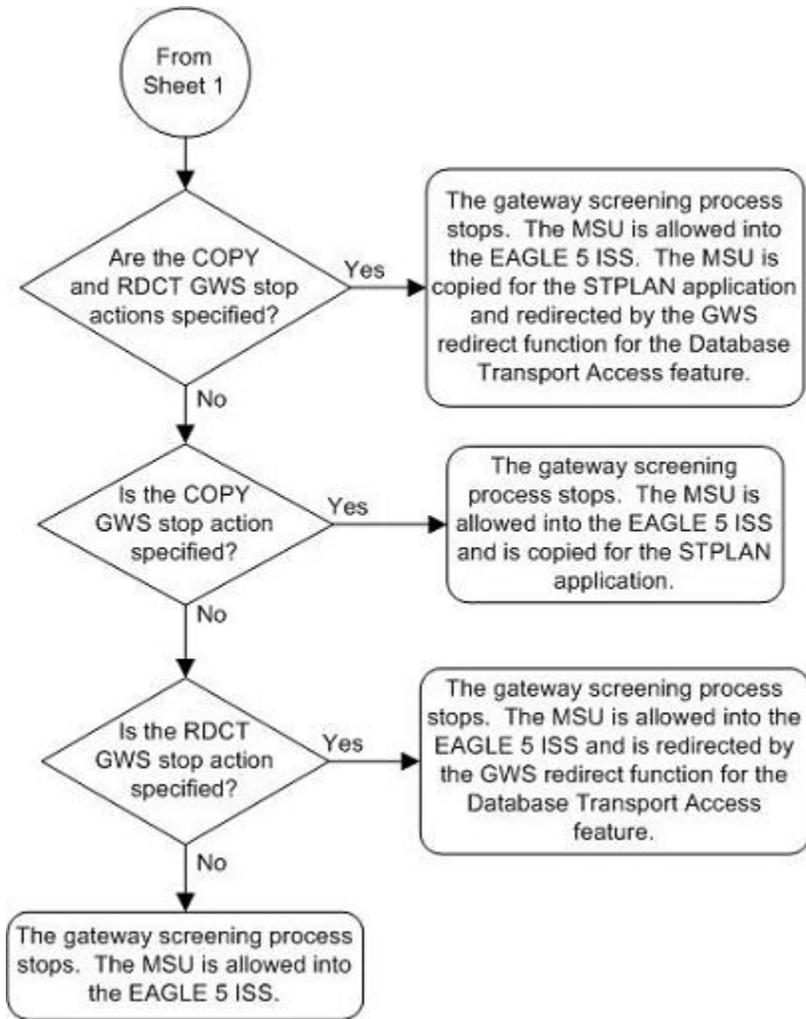

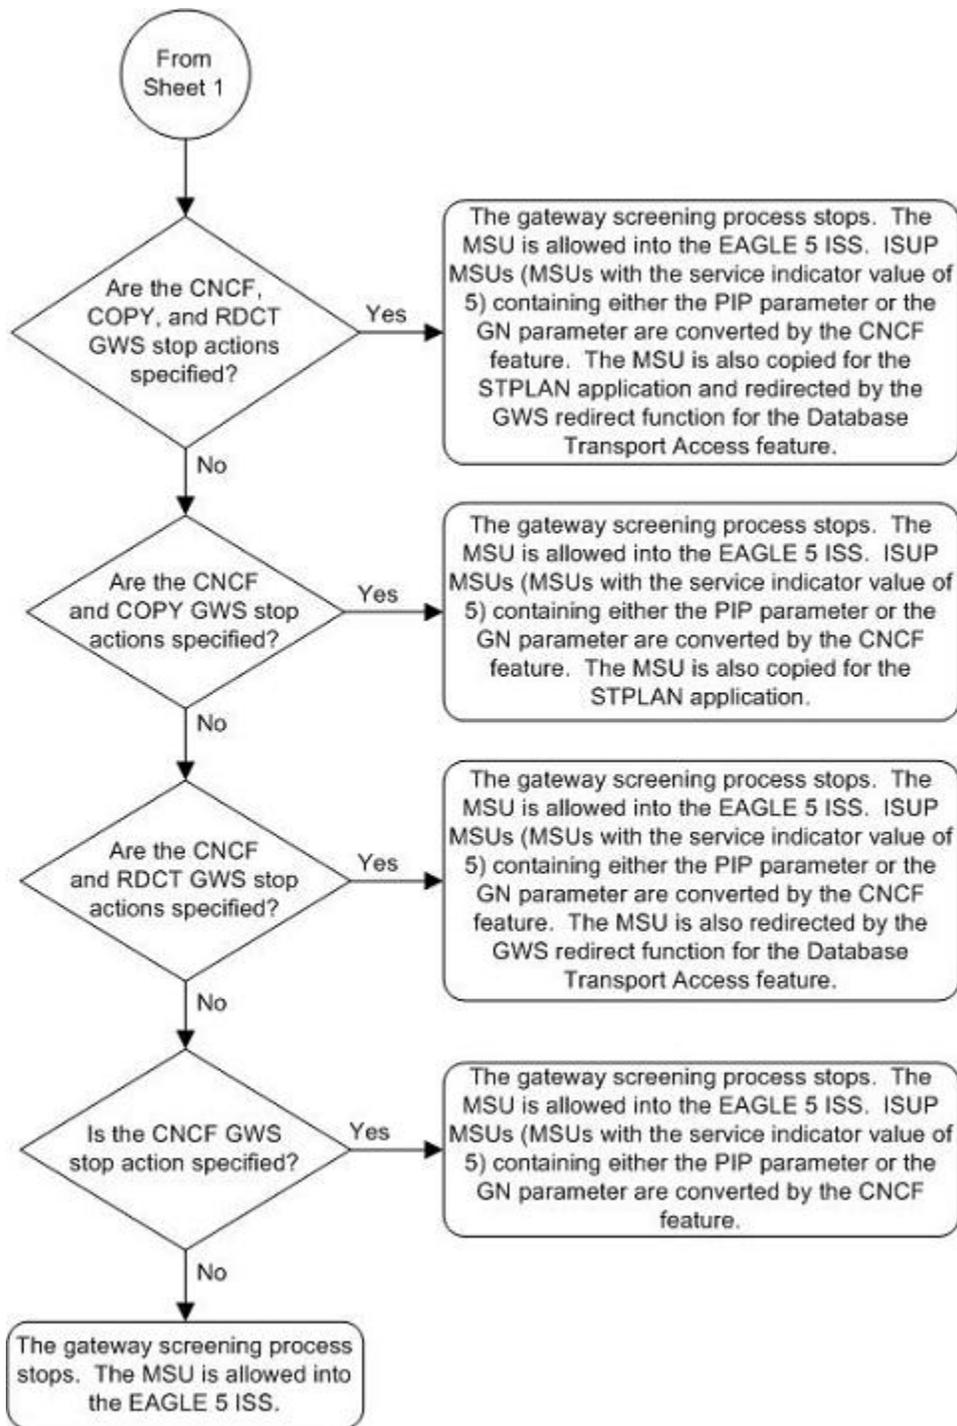

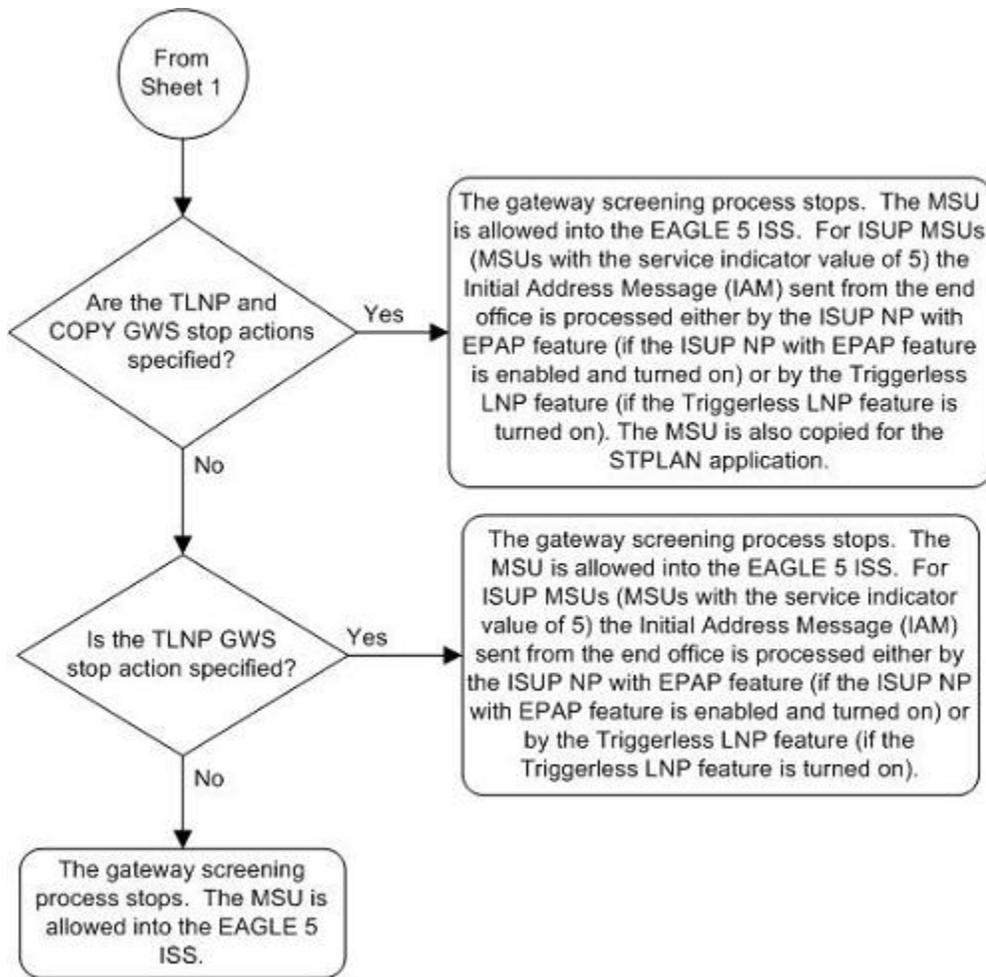

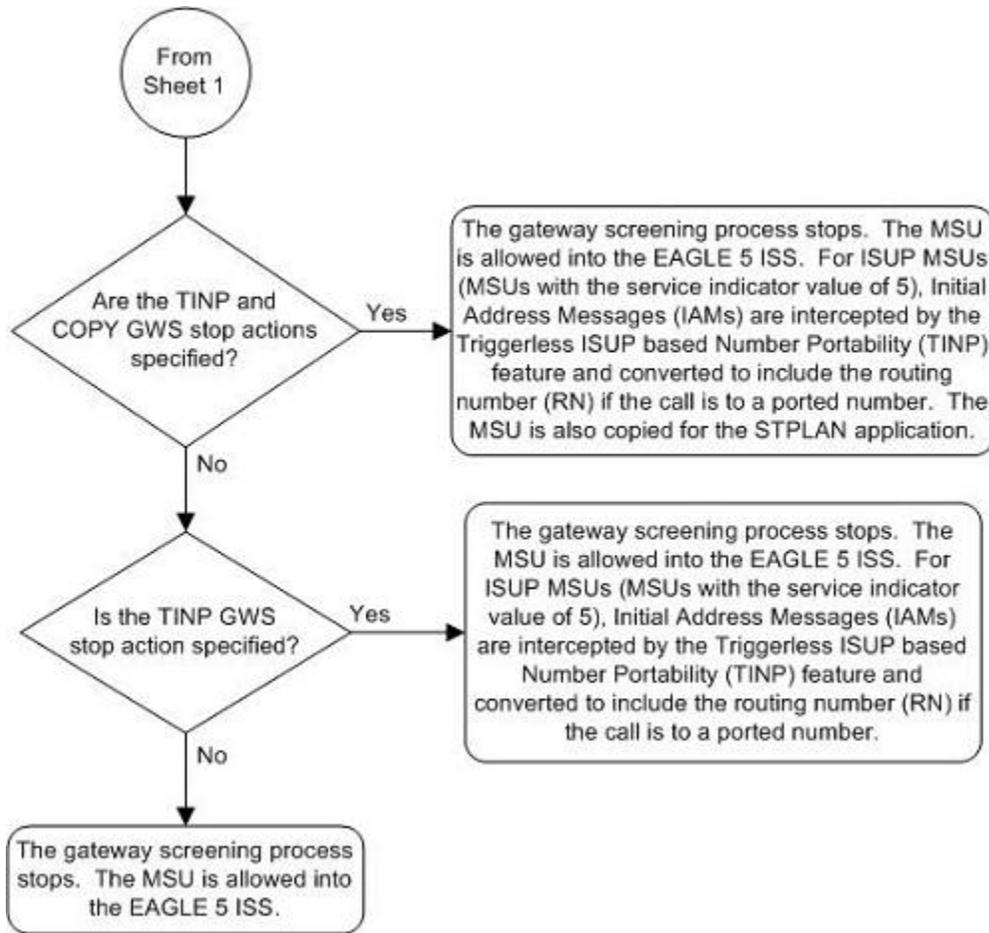


Figure 15-1. Allowed ISUP Message Type Screening Function

ANSI MSU (ANSI Message Signal Unit)							
BSN FSN LI	SIO xx xx xxxx NIC PRI SI	SIF					
		Routing Label DPC OPC NCM NC NI NCM NC NI		SLS xx	CIC Code	ISUP Message Type	ISUP Data

ITU-I MSU (ITU International Message Signal Unit)							
BSN FSN LI	SIO xx xx xxxx NIC PRI SI	SIF					
		Routing Label DPC OPC ID AREA ZONE ID AREA ZONE		SLS xx	CIC Code	ISUP Message Type	ISUP Data

14-Bit ITU-N MSU (14-Bit ITU National Message Signal Unit)							
BSN FSN LI	SIO xx xx xxxx NIC PRI SI	SIF					
		Routing Label DPC OPC NPC NPC		SLS xx	CIC Code	ISUP Message Type	ISUP Data

24-Bit ITU-N MSU (24-Bit ITU National Message Signal Unit)							
BSN FSN LI	SIO xx xx xxxx NIC PRI SI	SIF					
		Routing Label DPC OPC SP SSA MSA SP SSA MSA		SLS xx	CIC Code	ISUP Message Type	ISUP Data

Adding an Allowed ISUP Message Type Screen

This procedure is used to add an allowed ISUP message type (ISUP) screen to the database using the **ent-scr-isup** command. The parameters used by the **ent-scr-isup** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

Since both ISUP and TUP messages are screened by the allowed ISUP message type screen, the **ent-scr-isup** command contains a parameter for the ISUP message type (**isupmt**) and a parameter for the TUP message type (**tupmt**). Only one of these parameters can be specified for the allowed ISUP screen being entered into the database. The **isupmt** parameter should be specified in screen sets that contain allowed SIO screens that are screening messages for the service indicator value of 5 (SI=5). The **tupmt** parameter should be specified in screen sets that contain allowed SIO screens that are screening messages for the service indicator value of 4 (SI=4). If you wish to screen for TUP messages, make sure that the screen set being configured contains an allowed SIO screen that screens messages for the service indicator value of 4 (SI=4). If you do not do this, the EAGLE 5 ISS will treat the message as an ISUP message, even if the message contains the service indicator value of 4.

The examples in this procedure are used to add the allowed ISUP screen data shown in [Table 15-1](#) and based on the example configuration shown in [Figure 2-8](#) and [Figure 2-9](#).

Table 15-1. Example Gateway Screening Allowed ISUP Configuration Table

Screening Reference	ISUPMT	NSFI	ACTNAME
isp1	135	stop	CR
isp2	139	stop	CR
Screening Reference	TUPMT	NSFI	ACTNAME
tup1	100	stop	CR

Procedure

1. Verify that the gateway screening feature is on, by entering the **rtrv-feat** command.

If the gateway screening feature is on, the **GWS** field is set to **on**.

NOTE: The rtrv-feat command output contains other fields that are not used by this procedure. If you wish to see all the fields displayed by the rtrv-feat command, see the rtrv-feat command description in the Commands Manual.

If the gateway screening feature is on, shown by the entry **GWS = on** in the **rtrv-feat** command output, skip step 2, and go to step 3.

2. Turn the gateway screening feature on by entering this command.

```
chg-feat:gws=on
```

NOTE: Once the gateway screening feature is turned on with the chg-feat command, it cannot be turned off.

The gateway screening feature must be purchased before you turn this feature on with the chg-feat command. If you are not sure if you have purchased the gateway screening feature, contact your Tekelec Sales Representative or Account Representative.

When the **chg-feat** has successfully completed, this message should appear.

```
rlghncxa03w 06-10-28 11:43:04 GMT EAGLE5 36.0.0
CHG-FEAT: MASP A - COMPLTD
```

3. Display all allowed ISUP screens in the database using the **rtrv-scr-isup** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED ISUP
SR   REF  RULES
IEC  YES   2
WRD2 YES   1
WRD4 YES   1
```

If the screening reference names that you wish to add with this procedure are not shown in the **rtrv-scr-isup** command output, go to step 4. For this example, the screening reference names are not shown. If these screening reference names are shown in the **rtrv-scr-isup** command output, make sure the screening data you wish to enter is not already in the database by entering the **rtrv-scr-isup** command with the screening reference name. For example, enter the **rtrv-scr-isup:sr=iec** command. The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
```

```
SCREEN = ALLOWED ISUP
SR  ISUPMT/  NSFI  NSR/ACT
    TUPMT
iec 100      STOP   cr
iec 197      STOP   cr
```

If a gateway screening stop action set is to be assigned to the allowed ISUP screen being added to the database, go to step 4. Otherwise, go to step 5.

4. Display the gateway screening stop action sets in the database with the **rtrv-gws-actset** command. This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:28:30 GMT EAGLE5 36.0.0
ACT ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT  ACT
ID  NAME  1    2    3    4    5    6    7    8    9    10
--  ----  ---  ---  ---  ---  ---  ---  ---  ---  ---  ---
1   copy  copy
2   rdct  rdct
3   cr    copy rdct
4   cncf  cncf
5   cpcncf copy cncf
6   cn CFRD cn CFRD rdct
7   cpcFRD copy cn CFRD rdct
```

GWS action set table is (7 of 16) 44% full

If the required gateway screening stop action set is not in the database, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure to configure the required gateway screening stop action set.

5. Add a new allowed ISUP screen to the database using the **ent-scr-isup** command.

For this example, enter this command.

```
ent-scr-isup:sr=isp1:isupmt=135:nsfi=stop:actname=cr
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:29:30 GMT EAGLE5 36.0.0
ENT-SCR-ISUP: SCREEN SET AFFECTED - ISP1 1% FULL
ENT-SCR-ISUP: MASP A - COMPLTD
```

```
ent-scr-isup:sr=isp2:isupmt=139:nsfi=stop:actname=cr
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:29:30 GMT EAGLE5 36.0.0
ENT-SCR-ISUP: SCREEN SET AFFECTED - ISP2 1% FULL
ENT-SCR-ISUP: MASP A - COMPLTD
```

```
ent-scr-isup:sr=tup1:tupmt=100:nsfi=stop:actname=cr
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:29:30 GMT EAGLE5 36.0.0
ENT-SCR-ISUP: SCREEN SET AFFECTED - TUP1 1% FULL
ENT-SCR-ISUP: MASP A - COMPLTD
```

If a gateway screening stop action is to be assigned to the allowed ISUP screen being changed, enter the **ent-scr-isup** command with the **nsfi=stop** parameter and the **actname** parameter with the name of a gateway screening stop action set shown in the output of the **rtrv-gws-actset** command executed in step 4. The **isupmt** or **tupmt** parameters can have these values: 0 - 255, or an asterisk (*). A range of ISUP or TUP message types can be specified with the **ent-scr-isup** command. If a range of ISUP message types is specified, the range of ISUP message types cannot include any ISUP message types that

are currently provisioned for the screening reference name. If a range of TUP message types is specified, the range of TUP message types cannot include any TUP message types that are currently provisioned for the screening reference name. For example, screening reference name **scr1** contains these entries:

```
SR  ISUPMT/  NSFI  NSR/ACT
   TUPMT
scr1 115      STOP  cr
scr1 203      STOP  cr
```

Another entry for screening reference **scr1** cannot be specified if the range of ISUP message types includes the values 115 and 203.

6. Verify the changes using the **rtrv-scr-isup** command with the screening reference name used in step 5.

For this example, enter this command.

```
rtrv-scr-isup:sr=isp1
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:30:30 GMT  EAGLE5 36.0.0
SCREEN = ALLOWED ISUP
SR  ISUPMT/  NSFI  NSR/ACT
   TUPMT
isp1 135      STOP  cr
```

```
rtrv-scr-isup:sr=isp2
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:30:30 GMT  EAGLE5 36.0.0
SCREEN = ALLOWED ISUP
SR  ISUPMT/  NSFI  NSR/ACT
   TUPMT
isp2 139      STOP  cr
```

```
rtrv-scr-isup:sr=tup1
```

The following is an example of the possible output.


```
rlghncxa03w 06-10-25 15:30:30 GMT  EAGLE5 36.0.0
SCREEN = ALLOWED ISUP
SR  ISUPMT/  NSFI  NSR/ACT
   TUPMT
tup1 100      STOP  cr
```


7. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.


The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 15-2. Adding an Allowed ISUP Message Type Screen

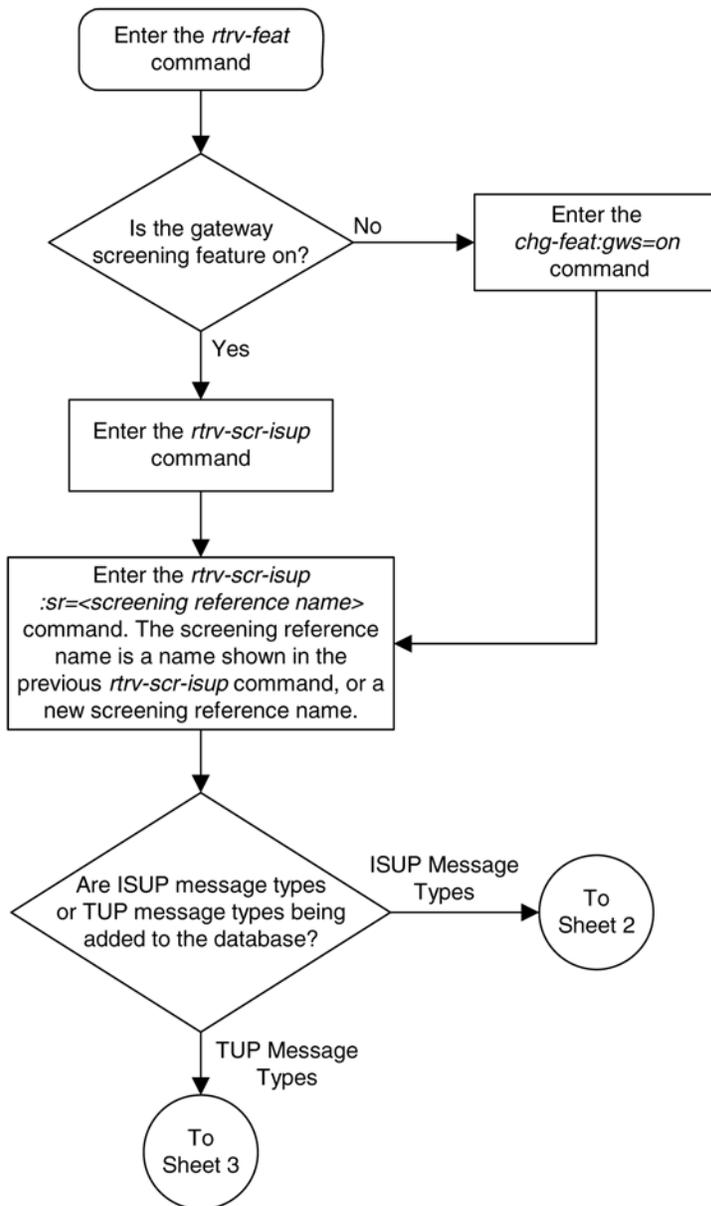

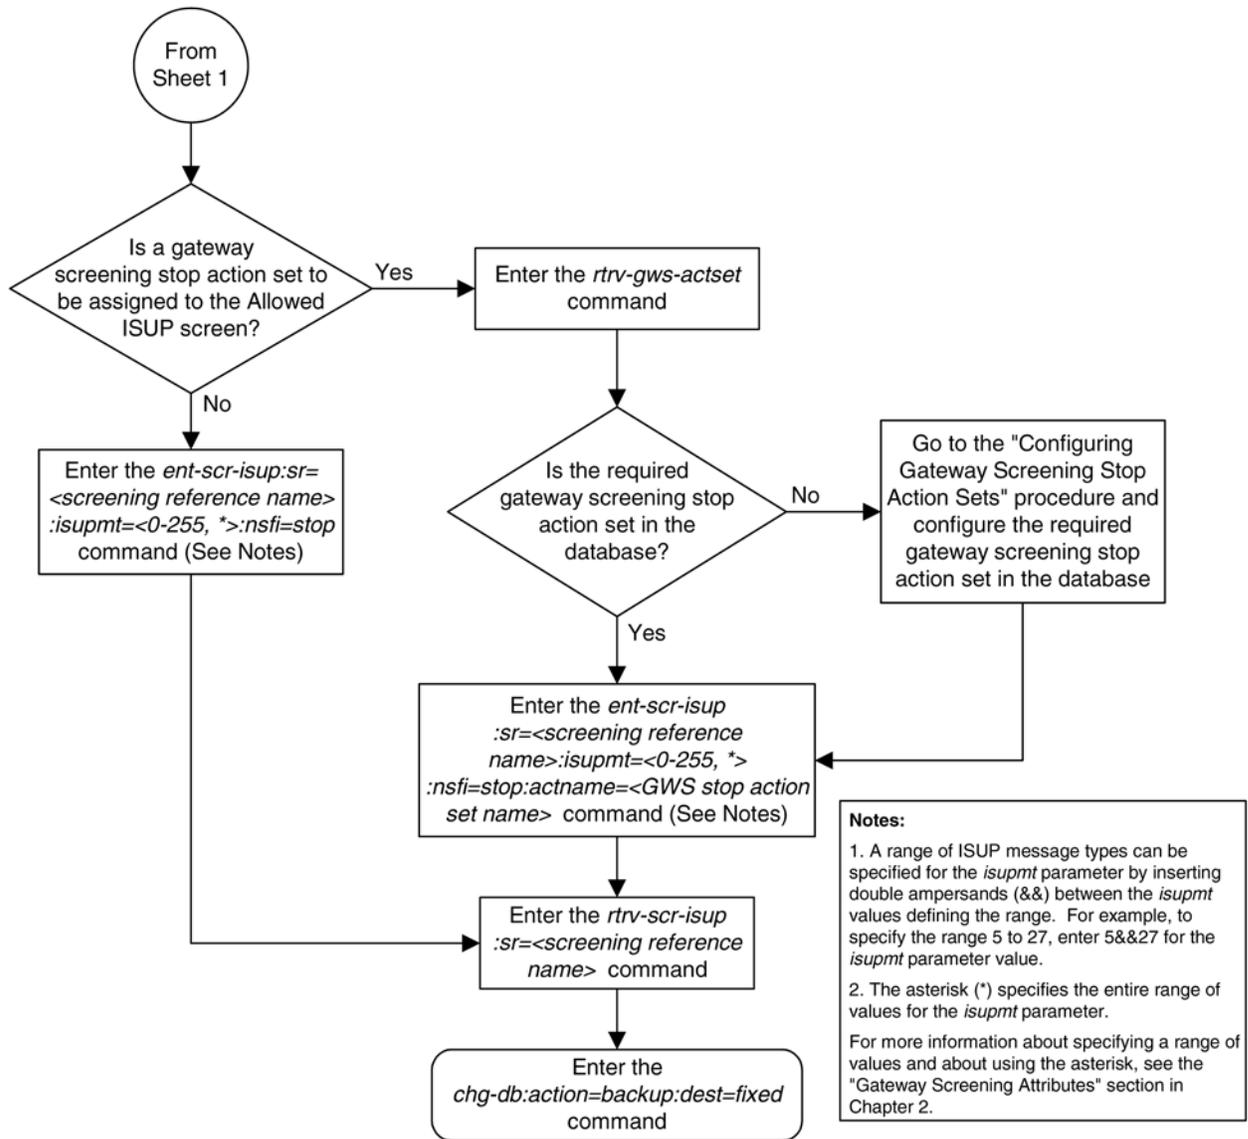

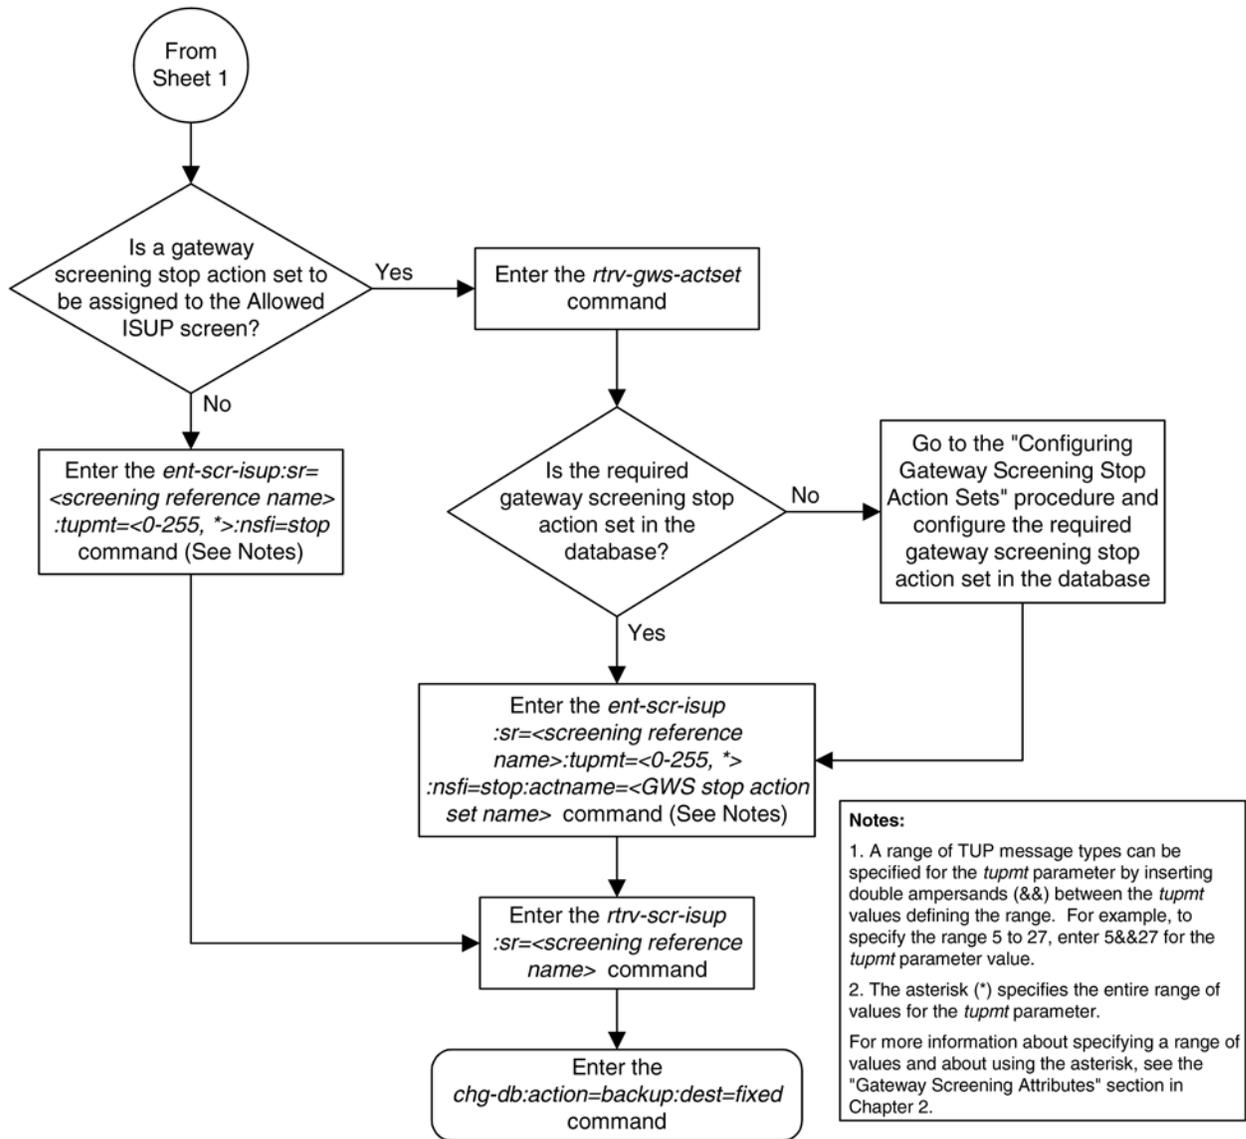

Removing an Allowed ISUP Message Type Screen

This procedure is used to remove an allowed ISUP message type (ISUP) screen from the database using the **dlt-scr-isup** command. The parameters used by the **dlt-scr-isup** command are shown in the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

Since both ISUP and TUP messages are screened by the allowed ISUP message type screen, the **dlt-scr-isup** command contains a parameter for the ISUP message type (**isupmt**) and a parameter for the TUP message type (**tupmt**). Only one of these parameters can be specified for the allowed ISUP screen being removed from the database.

The example in this procedure removes the allowed ISUP screen **isp2** from the database.

The allowed ISUP screen can be referenced by one of the following screens.

- Allowed SIO
- Allowed DPC
- Blocked DPC

Verifying the Gateway Screening Configuration

Enter the following commands to verify that none of these screens reference the allowed ISUP screen being removed from the database.

- `rtrv-scr-sio:nsfi=isup`
- `rtrv-scr-dpc:nsfi=isup`
- `rtrv-scr-blkdpc:nsfi=isup`

Gateway Screening Configuration Procedures

To change the NSFI of any of these screens, perform to one of these procedures.

- [Changing an Allowed SIO Screen](#)
- [Changing an Allowed DPC Screen](#)
- [Changing a Blocked DPC Screen](#)

Procedure

1. Display the allowed ISUP screens in the database using the `rtrv-scr-isup` command.

The following is an example of the possible output.

```
r1ghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED ISUP
SR   REF  RULES
IEC  YES   2
ISP1 YES   1
ISP2 YES   2
TUP1 YES   1
WRD2 YES   1
WRD4 YES   1
```

From the `rtrv-scr-isup` output, display the allowed ISUP screen you wish to remove using the `rtrv-scr-isup` command with the screening reference name. For this example, enter this command.

```
rtrv-scr-isup:sr=isp2
```

The following is an example of the possible output.

```
r1ghncxa03w 06-10-25 15:30:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED ISUP
SR   ISUPMT/  NSFI   NSR/ACT
      TUPMT
isp2 055      STOP   cr
```

2. Enter the commands in the [Verifying the Gateway Screening Configuration](#) section to verify that the screen being removed is not referenced by other screens in the database.

If the screen being removed is referenced by other screens, perform the procedures shown in the [Gateway Screening Configuration Procedures](#) section to change the NSFI of those screens to reference other screens or change the NSFI of these screens to STOP.

3. Remove the allowed ISUP screen from the database using the **dlt-scr-isup** command.

The current value of the **isupmt** parameter must be entered exactly as shown in the **rtrv-scr-isup** output in step 1. For this example, enter this command.

```
dlt-scr-isup:sr=isp2:isupmt=055
```

A message similar to the following should appear.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
DLT-SCR-ISUP: SCREEN SET AFFECTED - FLD5 0% FULL
DLT-SCR-ISUP: MASP A - COMPLTD
```

4. Verify the changes using the **rtrv-scr-isup** command with the screening reference name used in step 3.

For this example, enter this command.

```
rtrv-scr-isup:sr=isp2
```

The following is an example of the possible output.


```
E2573 Cmd Rej: SR or NSR does not reference an existing SR
```

This message shows that the specified screening reference name is not in the database and the action of the **dlt-scr-isup** command in step 3 was successful. If the specified screening reference name contained more than one entry when the **dlt-scr-isup** command was executed in step 3, the **rtrv-scr-isup:sr=** command output would show the remaining entries in the screening reference instead of error message E2573.

5. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

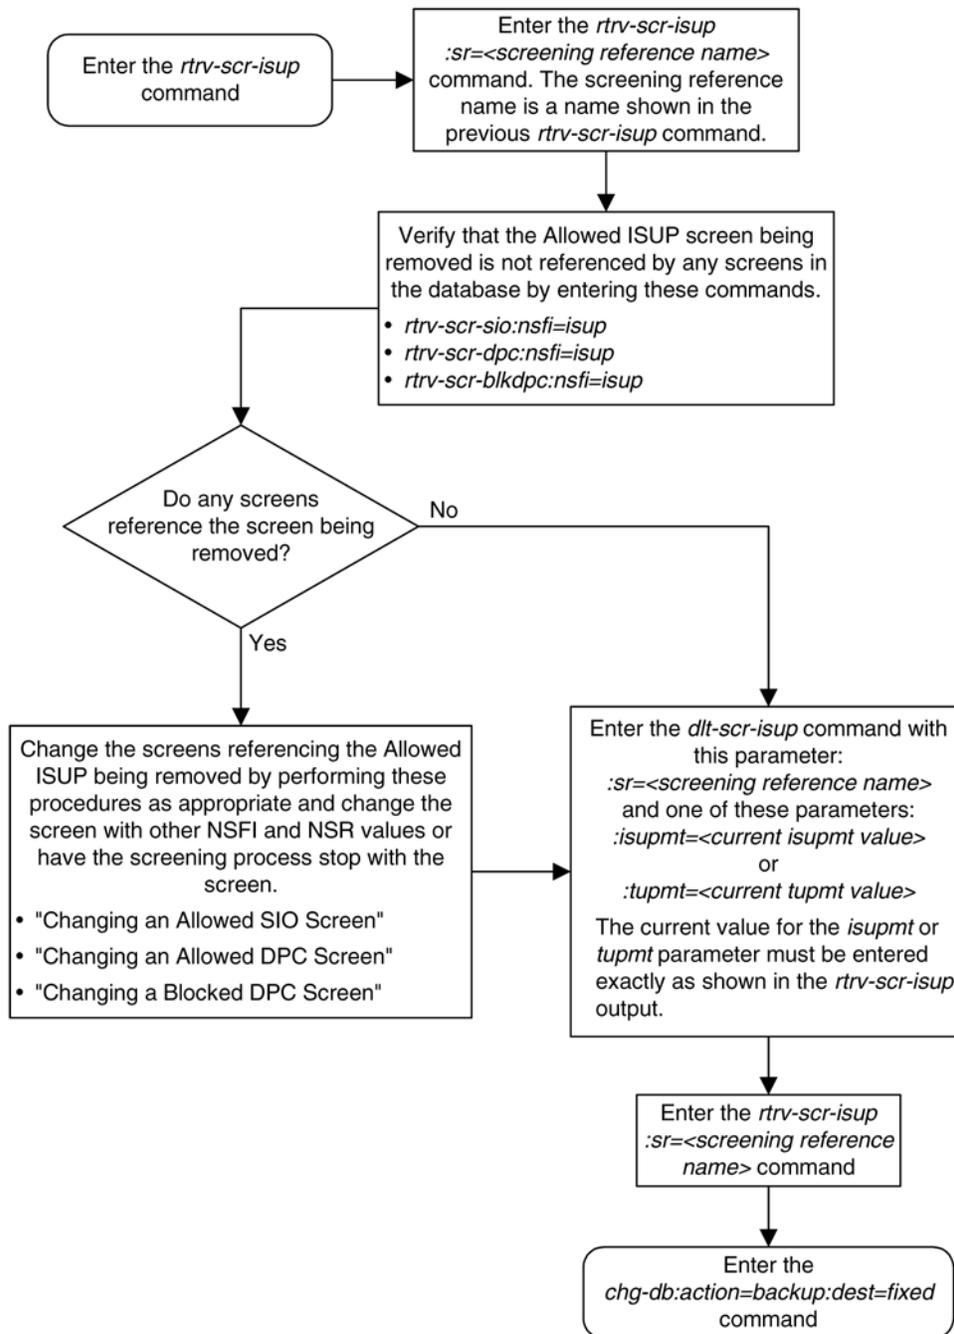Flowchart 15-3. Removing an Allowed ISUP Message Type Screen

Changing an Allowed ISUP Message Type Screen

This procedure is used to change the attributes of an allowed ISUP message type (ISUP) screen in the database using the **chg-scr-isup** command. The parameters used by the **chg-scr-isup** command are shown in

the [Gateway Screening Attributes](#) section. The general rules that apply to configuring gateway screening entities are shown in the [Gateway Screening Configuration](#) section.

The example in this procedure is used to change the ISUP message type 135 for the allowed ISUP screen **isp1** to 075 and to redirect the MSU for the DTA feature.

Procedure

1. Display the allowed ISUP screens in the database using the **rtrv-scr-isup** command.

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:25:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED ISUP
SR   REF  RULES
IEC  YES   2
ISP1 YES   3
ISP2 YES   2
TUP1 YES   1
WRD2 YES   1
WRD4 YES   1
```

From the **rtrv-scr-isup** output, display the allowed ISUP screen you wish to remove using the **rtrv-scr-isup** command with the screening reference name. For this example, enter this command.

```
rtrv-scr-isup:sr=isp1
```

The following is an example of the possible output.

```
rlghncxa03w 06-10-25 15:30:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED ISUP
SR   ISUPMT/  NSFI   NSR/ACT
      TUPMT
isp1 002      STOP   copy
isp1 089      STOP   -----
isp1 135      STOP   cr
```

If a gateway screening stop action set is to be assigned to the allowed ISUP screen being changed in the database, go to step 2.

Step 2 verifies the gateway screening stop action set names in the database. If a gateway screening stop action set name will not be assigned to the screen, skip step 2 and go to step 3.

2. Display the gateway screening stop action sets in the database with the **rtrv-gws-actset** command.

This is an example of the possible output.

```
rlghncxa03w 06-10-25 15:26:30 GMT EAGLE5 36.0.0
ACT ACT  ACT ACT  ACT ACT  ACT ACT  ACT ACT  ACT ACT
ID  NAME  1   2   3   4   5   6   7   8   9   10
--  ----  -   -   -   -   -   -   -   -   -   -
1   copy  copy
2   rdct  rdct
3   cr    copy rdct
4   cnf   cnf
5   cpnf  copy cnf
6   cnfrd cnf  rdct
7   cpfrd copy cnf rdct

GWS action set table is (7 of 16) 44% full
```

If the required gateway screening stop action set is not in the database, perform the [Configuring Gateway Screening Stop Action Sets](#) procedure to configure the required gateway screening stop action set.

3. Change the attributes of an allowed ISUP screen using the **chg-scr-isup** command.

If a gateway screening stop action is to be assigned to the allowed ISUP screen being changed, enter the **chg-scr-isup** command with the **nsfi=stop** parameter and the **actname** parameter with the name of a gateway screening stop action set shown in the output of the **rtrv-gws-actset** command executed in step 2.

The value of the **isupmt** or **tupmt** parameter must be entered exactly as shown in the **rtrv-scr-isup** output in step 1.

The **nisupmt** or **ntupmt** parameter can have these values: 0 - 255, or an asterisk (*).

A range of ISUP or TUP message types can be specified with the **chg-scr-isup** command. If a range of ISUP message types is specified, the range of ISUP message types cannot include any ISUP message types that are currently provisioned for the screening reference name. If a range of TUP message types is specified, the range of TUP message types cannot include any TUP message types that are currently provisioned for the screening reference name.

For example, screening reference name **scr1** contains these entries:

```
SR   ISUPMT/  NSFI   NSR/ACT
     TUPMT
scr1 115      STOP   cr
scr1 203      STOP   cr
```

Another entry for screening reference **scr1** cannot be specified if the range of ISUP message types includes the values 115 and 203. For this example, enter this command.

```
chg-scr-isup:sr=isp1:isupmt=135:nisupmt=075:actname=rdct
```

The following messages appear.

```
rlghncxa03w 06-10-25 15:27:30 GMT EAGLE5 36.0.0
CHG-SCR-ISUP: SCREEN SET AFFECTED - ISP1 1% FULL
CHG-SCR-ISUP: MASP A - COMPLTD
```

4. Verify the changes using the **rtrv-scr-isup** command with screening reference name used in step 3.

For this example, enter this command.

```
rtrv-scr-isup:sr=isp1
```

The following is an example of the possible output.


```
rlghncxa03w 06-10-25 15:30:30 GMT EAGLE5 36.0.0
SCREEN = ALLOWED ISUP
SR   ISUPMT/  NSFI   NSR/ACT
     TUPMT
isp1 002      STOP   copy
isp1 075      STOP   rdct
isp1 089      STOP   -----
```


5. Backup the new changes using the **chg-db:action=backup:dest=fixed** command.

The following messages should appear, the active Maintenance and Administration Subsystem Processor (MASP) appears first.

```
BACKUP (FIXED) : MASP A - Backup starts on active MASP.
BACKUP (FIXED) : MASP A - Backup on active MASP to fixed disk complete.
BACKUP (FIXED) : MASP A - Backup starts on standby MASP.
BACKUP (FIXED) : MASP A - Backup on standby MASP to fixed disk complete.
```

Flowchart 15-4. Changing an Allowed ISUP Message Type Screen

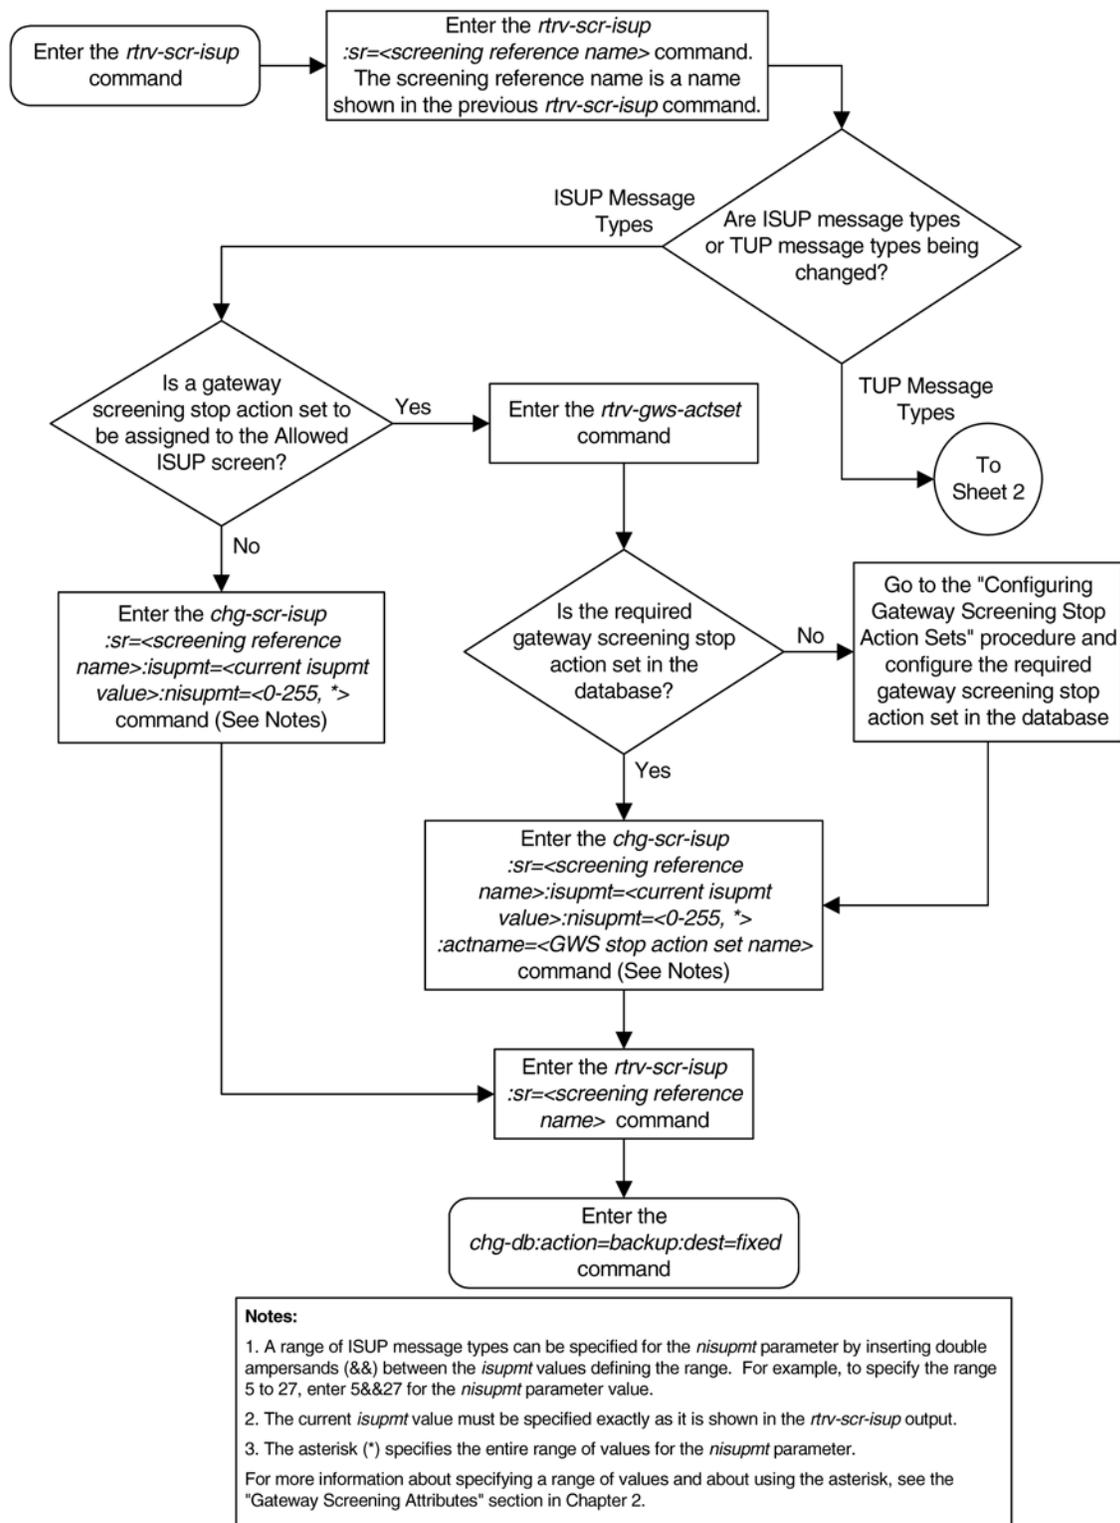

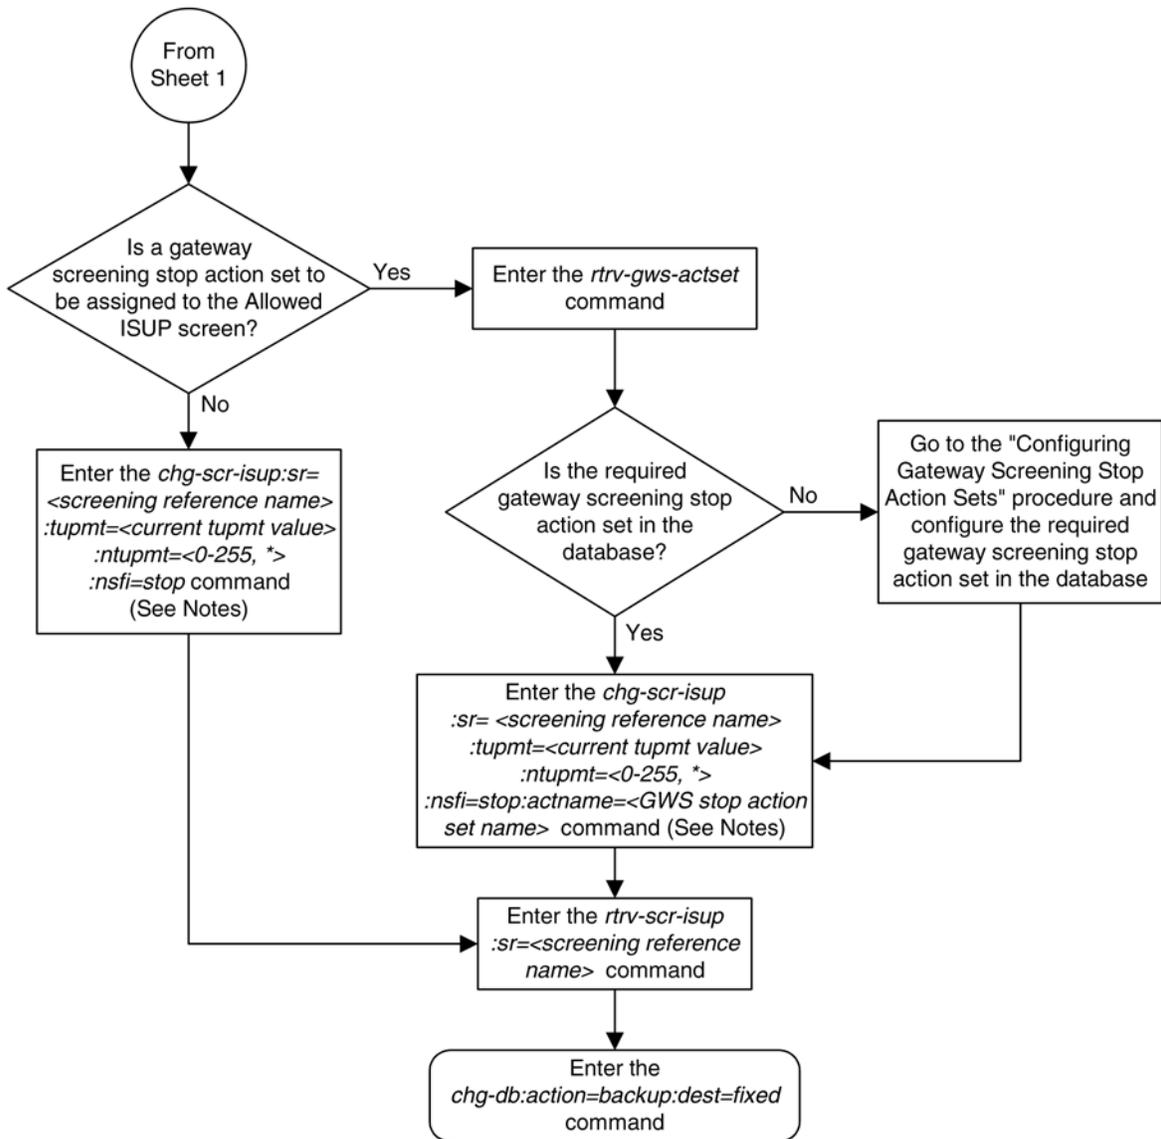

Notes:

1. A range of TUP message types can be specified for the *ntupmt* parameter by inserting double ampersands (&&) between the *tupmt* values defining the range. For example, to specify the range 5 to 27, enter 5&&27 for the *ntupmt* parameter value.
2. The current *tupmt* value must be specified exactly as it is shown in the *rtrv-scr-isup* output.
3. The asterisk (*) specifies the entire range of values for the *ntupmt* parameter.

For more information about specifying a range of values and about using the asterisk, see the "Gateway Screening Attributes" section in Chapter 2.

Glossary

A

ACT	Activate
AFTPC	Affected Point Code
Allowed Affected Destination Field	The gateway screening entity that identifies the point code in the affected destination field (the concerned signaling point code) of incoming MTP network management messages from another network that are allowed into the EAGLE 5 ISS. Messages containing the specified point code are allowed into the network.
Allowed AFTPC	The gateway screening entity that identifies the messages containing a specific affected point code. Messages containing the specified affected point code are allowed into the network.
Allowed DPC	The gateway screening entity that identifies the destination point codes that are allowed to receive SS7 messages from the EAGLE 5 ISS. Messages containing the specified destination point codes go on to the next step in the gateway screening process, or are allowed into the network if the gateway screening process stops with this entity.
Allowed ISUP	The gateway screening entity that identifies the ISUP or TUP message types that are allowed into the network.
Allowed OPC	The gateway screening entity that identifies the originating point codes that are allowed to send SS7 messages into the network. Messages containing the specified originating point codes go on to the next step in the gateway screening process, or are allowed into the network if the gateway screening process stops with this entity.
Allowed SIO	The gateway screening entity that identifies the type of MSUs (ISUP, TUP, TCAP, and so forth) that are allowed into the network. The message type is determined by the network indicator code (NIC), priority (PRI), and service indicator (SI) fields of the signaling information octet (SIO) field in the MSU, and the H0 and H1 heading codes of the signaling information field of the MSU. Messages containing the specified message type go on to the next step in the gateway screening process, or are allowed into the network if the gateway screening process stops with this entity.
Allowed TT	The gateway screening entity that identifies the SCCP messages that have a specified translation type value in the called party address. SCCP messages containing specified translation type in the called party address go on to the next step in the gateway screening process, or are allowed into the network if the gateway screening process stops with this entity.
ANSI	American National Standards Institute
APC	Adjacent Point Code
	Application Processing Chassis

B

BLKDPC	Blocked Destination Point Code
BLKOPC	Blocked Originating Point Code

C

CLLI	Common Language Location Identifier
CNCF	Calling Name Conversion Facility
CNIP	Calling Name Identification Presentation
CR	Cluster Routing
	Connection Request
CSR	Customer Service Request

D

Database	All data that can be administered by the user, including cards, destination point codes, gateway screening tables, global title translation tables, links, LNP services, LNP service providers, location routing numbers, routes, shelves, subsystem applications, and 10 digit telephone numbers.
DESTFLD	The point code in the affected destination field (the concerned signaling point code) of incoming MTP network management messages from another network that are allowed into the EAGLE 5 ISS.
Destination	The node to which the signaling link traffic is routed. This destination is identified by a point code, either a full point code or a cluster point code.
DPC	Destination Point Code The point code of the signaling point to which the MSU is routed. This point code can be adjacent to the EAGLE 5 ISS, but does not have to be.
DSM	Database Service Module.
DTA	Database Transport Access A feature in the EAGLE 5 ISS that encapsulates specific MSUs into the data portion of SCCP within a new SS7 MSU and sends the new MSU to the destination using global title translation. The EAGLE 5 ISS uses gateway screening to determine which MSUs are used by the DTA feature.

E

EPAP	EAGLE Provisioning Application Processor
------	--

F

FR	Family of Requirement
----	-----------------------

G

GLS	Generic Loading Services An application that is used by the TSM cards for downloading gateway screening to LIM cards.
GN	Generic Name
GPL	Generic Program Load
G-Port	GSM Mobile Number Portability A feature that provides mobile subscribers the ability to change the GSM subscription network within a portability cluster, while retaining their original MSISDN(s).
GPSM-II	General Purpose Service Module
GT	Global Title Routing Indicator

Database Administration Manual - Gateway

Screening

GWS	Gateway Screening.
GWSA	Gateway Screening Action
	Gateway Screening Application
GWSD	Gateway Screening Message Discard
GWSM	Gateway Screening Messages
	Gateway Screening Mode

H

HC-MIM	High Capacity Multi-Channel Interface Module
--------	--

I

IAM	Initial Address Message
ID	Identity, identifier
IEC	Inter-Exchange Carrier
	International Escape Code
IMT	Inter-Module-Transport
	The communication software that operates the inter-module-transport bus on all cards except the LIMATM, DCM, DSM, and HMUX.
ISS	Integrated Signaling System
ISUP	ISDN User Part
ITU	International Telecommunications Union

L

LIM	Link Interface Module
Link	Signaling Link
LNP	Local Number Portability
LST	Link Set Type

M

MASP	Maintenance and Administration Subsystem Processor
MDAL	Maintenance Disk and Alarm Card
MODE	A parameter of the chg-slt command and a field in the rtrv-slt command output showing the mode used when sending signaling link test messages, regular or special. special - All SLTMs generated by the links in the link set associated with this SLTM record are designated “special” maintenance messages. regular - All SLTMs generated by the links in the link set associated with this SLTM record are designated “regular” maintenance messages.
MSA	Metropolitan Statistical Areas
	Main Signaling Area
MSU	Message Signaling Unit
MTP	Message Transfer Part
	Module Test Plan

N

NC	Network Cluster Network Code
NCM	Network Cluster Member
NI	Network Indicator
NIC	Network Identifier Code Network Information Center
NP	Number Plan Numbering Plan Number Portability
NPC	National Point Code
NSR	Next Screening Reference

O

OPC	Originating Point Code
-----	------------------------

P

PIP	Party Information Parameter
PRI	Primary Rate Interface Primary Rate ISDN Priority

R

RI	Routing Indicator
RN	Routing Number
RSP	Routeset Prohibited Test (Msg)
RSR	Reset Request

S

SCCP	Signaling Connection Control Part
SCP	Service Control Point.
Screen Set	A gateway screening table containing a list of rules, or screening references. The screening references indicate the screening action that is to be performed on a message in a specific linkset.
Screening Reference	The name of each entry in the gateway screening tables. Combined with the next screening function identifier (NSFI), it uniquely defines a screening table. This field is used with all screening functions except the screen set screening function.
SCRN	Screen Set Name
SEAS	Signaling Engineering and Administration System An interface defined by Bellcore and used by the Regional Bell Operating Companies (RBOCs), as well as other Bellcore Client Companies (BCCs), to remotely administer and monitor the signaling points in their network from a central location.

Database Administration Manual - Gateway

Screening

SIF	Service Information Field
SI	Service Indicator
SIO	Service Information Octet
SIO	Service Information Octet.
SLTA	Signaling Link Test Acknowledgment
SLTM	Signal Link Test Message
SP	Service Provider
	Signaling Point
Spare Point Code	The EAGLE ITU International/National Spare Point Code feature allows a network operator to use the same Point Codes across two networks (either ITU-I or ITU-N). The feature also enables National and National Spare traffic to be routed over the same linkset. The EAGLE uses the MSU Network Indicator (NI) to differentiate the same point code of one network from the other. In accordance with the SS7 standard, unique Network Indicator values are defined for Point Code types ITU-I, ITU-N, ITU-I Spare, and ITU-N Spare.
SR	Screening Reference
SS7	Signaling System #7
SSA	Subsystem Allowed
SSN	SS7 Subsystem Number
	Subsystem Number
SSP	Subsystem Prohibited network management message. Subsystem Prohibited SCCP (SCMG) management message. (CER) Service Switching Point (SS7 Network)
SST	Secondary State
	Subsystem Status Test
	Subsystem Status Test network management message. Subsystem Status Test SCCP (SCMG) management message. (CER)
STPLAN	Signaling Transfer Point Local Area Network
	The generic program load and application used by the ACM card to support the STP LAN application. This GPL does not support 24-bit ITU-N point codes.
T	
TCAP	Transaction Capabilities Application Part
TDM	Terminal Disk Module.
	Time Division Multiplexing.
TFA	TransFer Allowed (Msg)
TFC	Transfer Control
	TransFer Controlled (Msg)
TFR	Transfer Restricted
TFP	TransFer Prohibited (Msg)
TLNP	Triggerless LNP
Triggerless LNP	A feature that gives service providers a method to route calls to ported numbers without having to upgrade their signaling switch (end office or mobile switching center) software. This feature uses the gateway screening stop action TLNP to intercept through-switched ISUP messages on the LIM.
TSM	Translation Services Module

TT Translation Type.
TUP Telephone User Part

U

UDT Unit Data Transfer
UDTS Unit Data Transfer Service
UIM Unsolicited Information Message
UPU User Part Unavailable
UPU User Part Unavailable

X

XUDT Extended Unit Data
Extended User Data
XUDTS Extended Unit Data Service
Extended User Data Service

Index

14-bit ITU national spare point code 2-6 ,
2-9 , 2-18 , 3-6 , 3-7 , 3-12 , 3-17
, 3-18 , 4-7 , 4-8 , 4-14 , 4-20 ,
4-22 , 6-9 , 6-10 , 6-17 , 6-22 ,
6-23 , 6-24 , 7-9 , 7-10 , 7-14 ,
7-20 , 8-8 , 8-11 , 8-12 , 8-20 ,
8-24 , 8-27 , 8-28 , 9-12 , 9-13 ,
9-20 , 9-21 , 9-27 , 9-28 , 11-9 ,
11-11 , 11-12 , 11-21 , 11-25 ,
11-27 , 11-28 , 11-29 , 12-12 ,
12-13 , 12-20 , 12-25 , 12-26 ,
12-27

A

admonishments, documentation 1-3
Allowed Affected Destination Field 2-2
Allowed Affected Point Code 2-2
Allowed Called Party Address 2-2
Allowed Calling Party Address 2-2
Allowed Destination Point Code 2-2
Allowed ISUP Message Type 2-2
Allowed Originating Point Code 2-2
Allowed Signaling Information Octet 2-2
Allowed Translation Type 2-2

B

Blocked Destination Point Code 2-2
Blocked Originating Point Code 2-2

D

documentation
admonishments 1-3

I

ITU international spare point code 2-6 , 2-9
, 2-18 , 3-6 , 3-7 , 3-12 , 3-17 ,
3-18 , 4-7 , 4-8 , 4-14 , 4-20 ,
4-22 , 6-9 , 6-10 , 6-17 , 6-22 ,
6-23 , 6-24 , 7-9 , 7-10 , 7-14 ,
7-20 , 8-8 , 8-11 , 8-12 , 8-20 ,
8-24 , 8-27 , 8-28 , 9-12 , 9-13 ,

9-20 , 9-21 , 9-27 , 9-28 , 11-9 ,
11-11 , 11-12 , 11-21 , 11-25 ,
11-27 , 11-28 , 11-29 , 12-12 ,
12-13 , 12-20 , 12-25 , 12-26 ,
12-27

M

MTP Screening 2-2

N

npcst parameter 2-9 , 3-18 , 4-22 , 6-24
, 6-24 , 8-24 , 8-28 , 9-27 , 9-28 ,
11-25 , 11-28 , 11-29 , 12-27

P

pcst parameter 2-6 , 2-9 , 2-18 , 3-7 ,
3-12 , 3-18 , 4-8 , 4-14 , 4-22 ,
6-10 , 6-17 , 6-24 , 7-10 , 7-14 ,
8-8 , 8-11 , 8-12 , 8-20 , 8-24 ,
8-27 , 8-28 , 9-13 , 9-20 , 9-21 ,
9-27 , 9-28 , 11-9 , 11-12 , 11-21 ,
11-25 , 11-28 , 11-29 , 12-13 ,
12-20 , 12-27

S

SCCP Screening 2-2

Spare point code

14-bit ITU national 2-6 , 2-9 , 2-18 ,
3-6 , 3-7 , 3-12 , 3-17 , 3-18 , 4-7
, 4-8 , 4-14 , 4-20 , 4-22 , 6-9 ,
6-10 , 6-17 , 6-22 , 6-23 , 6-24 ,
7-9 , 7-10 , 7-14 , 7-20 , 8-8 ,
8-11 , 8-12 , 8-20 , 8-24 , 8-27 ,
8-28 , 9-12 , 9-13 , 9-20 , 9-21 ,
9-27 , 9-28 , 11-9 , 11-11 , 11-12 ,
11-21 , 11-25 , 11-27 , 11-28 ,
11-29 , 12-12 , 12-13 , 12-20 ,
12-25 , 12-26 , 12-27

ITU international 2-6 , 2-9 , 2-18 ,
3-6 , 3-7 , 3-12 , 3-17 , 3-18 , 4-7
, 4-8 , 4-14 , 4-20 , 4-22 , 6-9 ,
6-10 , 6-17 , 6-22 , 6-23 , 6-24 ,
7-9 , 7-10 , 7-14 , 7-20 , 8-8 ,
8-11 , 8-12 , 8-20 , 8-24 , 8-27 ,

**Database Administration Manual -
Gateway Screening**

8-28 , 9-12 , 9-13 , 9-20 , 9-21 ,
9-27 , 9-28 , 11-9 , 11-11 , 11-12 ,
11-21 , 11-25 , 11-27 , 11-28 ,

11-29 , 12-12 , 12-13 , 12-20 ,
12-25 , 12-26 , 12-27