

19-, 23- and 24-inch, and 600mm Rack Slide Mounts

The mounting slides can each be used on either side of the rack.

The parts you require are listed in the tables below.

TABLE 2-1 19-inch Rackmounting Kit

Description	Quantity	Part No. (t1, D130)	Part No. (T1)
Slide Assembly	2	540-4362	540-4785
Cable management bracket	1	340-6151	340-6151
Thumbscrew bracket	2	340-6085	340-6085
M4 8mm Phillips countersunk screw	4	240-3070	240-3070
10-32 UNF screws	8	240-1207	240-1207

TABLE 2-2 23-inch Rackmounting Kit (same for Netra t1, T1, and D130 models)

Description	Quantity	Part No.
Slide Assembly	2	540-4359
Cable management bracket	1	340-6151
Thumbscrew bracket	2	340-6085
M4 8mm Phillips countersunk screw	4	240-3070
10-32 UNF screws	8	240-1207

TABLE 2-3 24-inch Rackmounting Kit (same for Netra t1, T1, and D130 models)

Description	Quantity	Part No.
Slide Assembly	2	540-4360
Cable management bracket	1	340-6151
Thumbscrew bracket	2	340-6085
M4 8mm Phillips countersunk screw	4	240-3070
10-32 UNF screws	8	240-1207

TABLE 2-4 600mm Rackmounting Kit (same for Netra t1, T1, and D130 models)

Description	Quantity	Part No.
Slide Assembly	2	540-4361
Cable management bracket	1	340-6151

TABLE 2-4 600mm Rackmounting Kit (*Continued*)(same for Netra t1, T1, and D130)

Description	Quantity	Part No.
Thumbscrew bracket	2	340-6085
M4 8mm Phillips countersunk screw	4	240-3070
10-32 UNF screws	8	240-1207

The cable management bracket is provided to aid cabling at the rear of the system.

Note – 10-32 UNF screws are provided in the 23 inch, 24 inch, and 600mm Rackmounting Kits. For details of alternate screws you may need instead of these, please check the documentation supplied by your rack vendor.

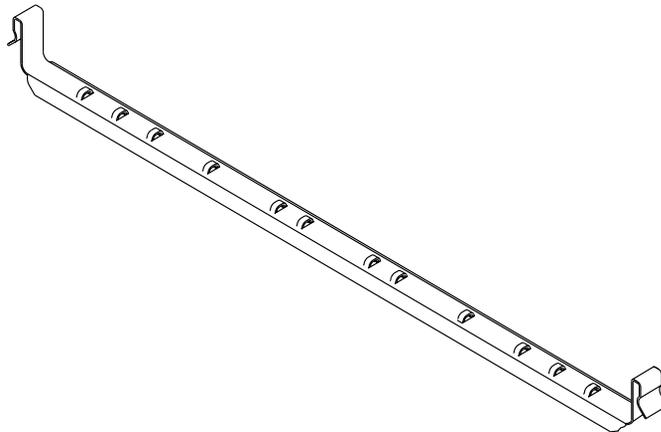


FIGURE 2-1 Cable Management Bracket

▼ To Assemble the Slides and Mount the System

1. Position the two parts of the slide so that the double-angled ear (A) is to the front.

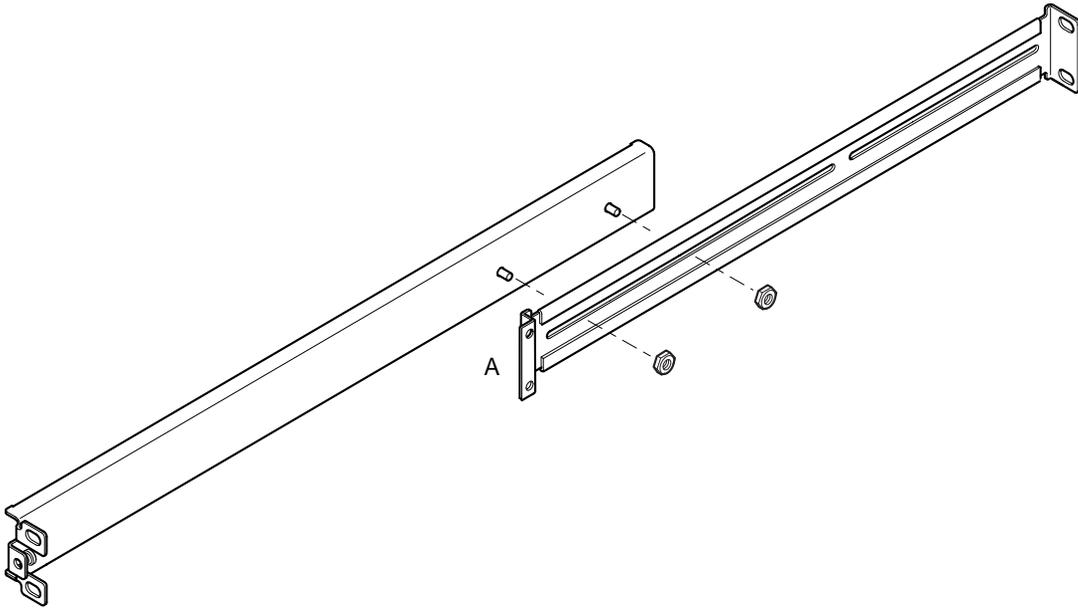


FIGURE 2-2 19-, 23- and 24inch and 600mm Rack Slide Mounts

2. Ensure that the front and rear mounting ears are the correct distance apart, and loosely secure the two parts together using the M4 nuts supplied.
3. Adjust the mount to fit the rack.
The ears must be outside the rack.
4. Move the brackets so that the studs are in suitable slots and tighten the nuts.
5. Fasten the mounting slides to the rack using the screws supplied.
Refer to FIGURE 2-3 on page 13. Leave the screws slightly loose to allow adjustment when the Netra unit is inserted.

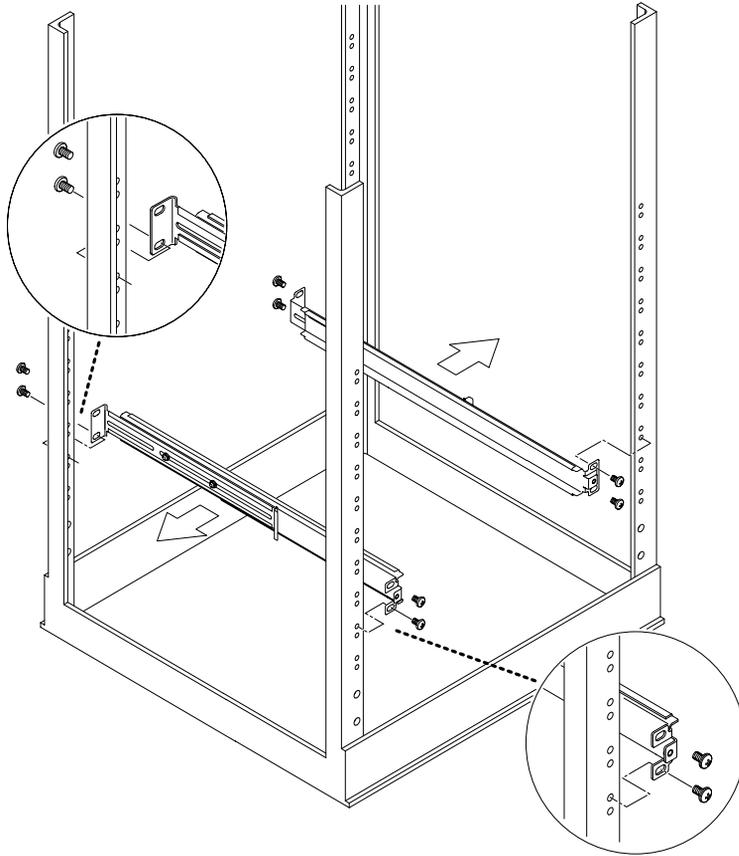


FIGURE 2-3 Fitting Slide Mounts to the Rack

6. Fit the thumbscrew brackets to the side of the Netra unit using the screws supplied.

Refer to FIGURE 2-4 and FIGURE 2-5.

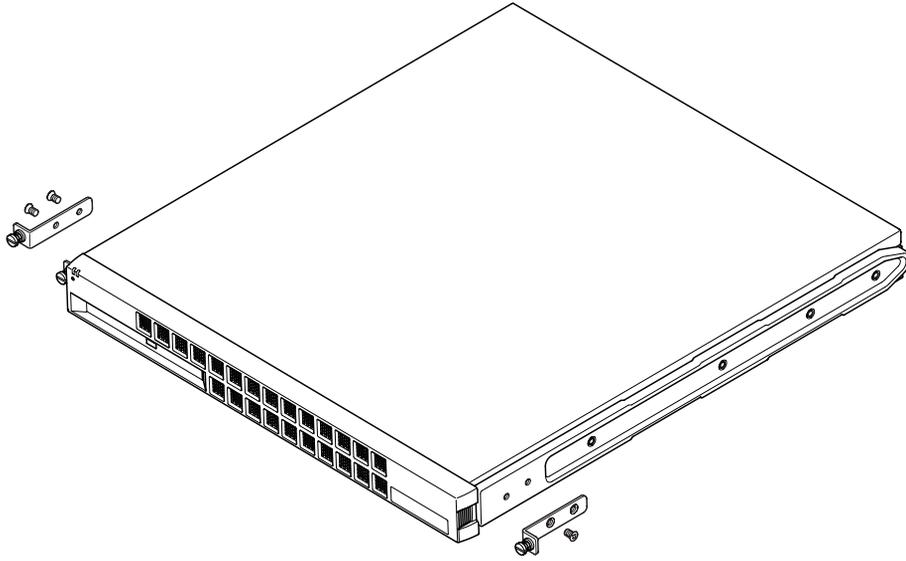


FIGURE 2-4 Fitting the Thumbscrew Brackets (Netra T1 server shown)

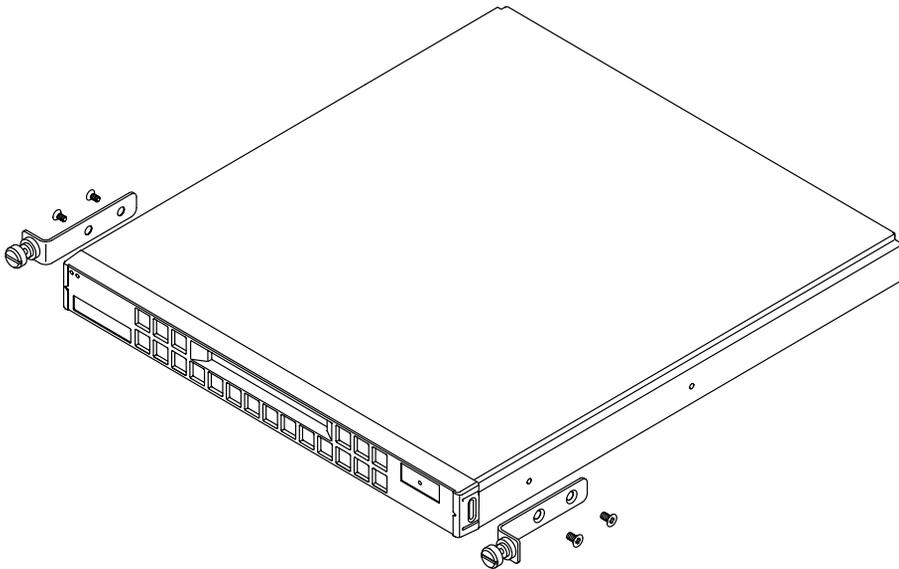


FIGURE 2-5 Fitting the Thumbscrew Brackets (Netra t1 server shown)

7. Slide the Netra unit into the rack.
8. Check the alignment of the thumbscrews either side of the Netra unit.
9. Fasten the slide mount fixing screws.
It may be necessary to readjust the fixings in order to align the system as required.
10. Fasten the thumbscrews at the front of the Netra unit finger-tight.

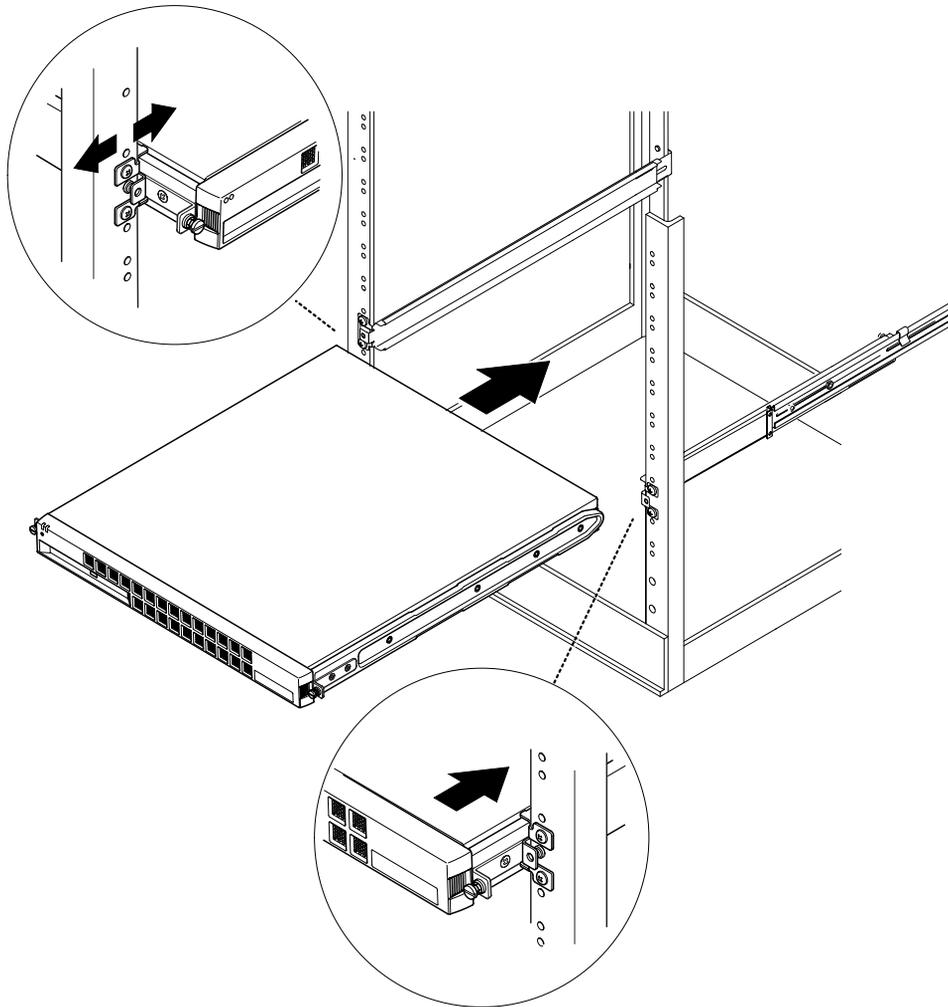


FIGURE 2-6 Fitting a Netra T1 Unit into a Rack

▼ To Fit the Cable Management Bracket

- **Hook the bracket over the slide mounts at the rear of the system.**

You can use the loops in the bracket to secure the cables with cable ties.

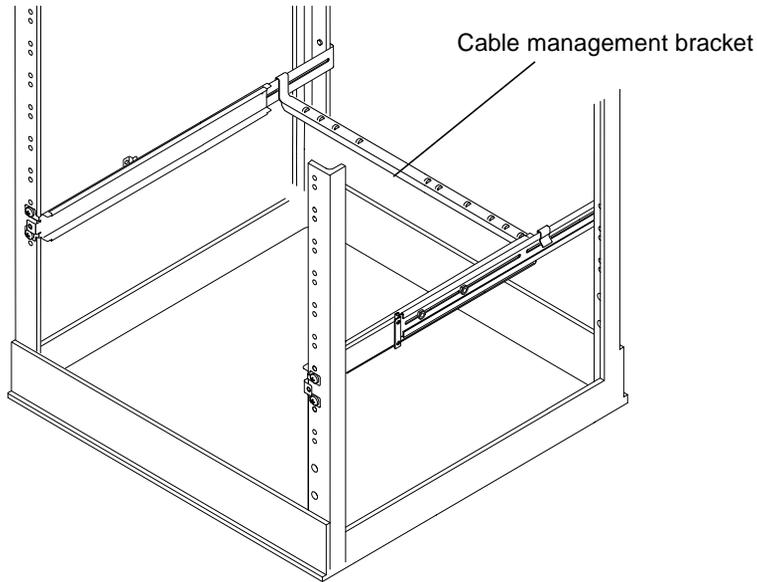


FIGURE 2-7 Cable Management Bracket Installed in a Rack

Fixed Mounts

The parts required are listed below:

TABLE 3-1 Fixed Bracket Mounting Kit

Description	Quantity	Part No.
Bracket	4	340-5819
M4 x 8mm countersunk Phillips screws	4	240-3070
10-32 UNF screws	8	240-1207

1. Remove the thumbscrew rack brackets from either side of the system.

Refer to FIGURE 3-1 and FIGURE 3-2.

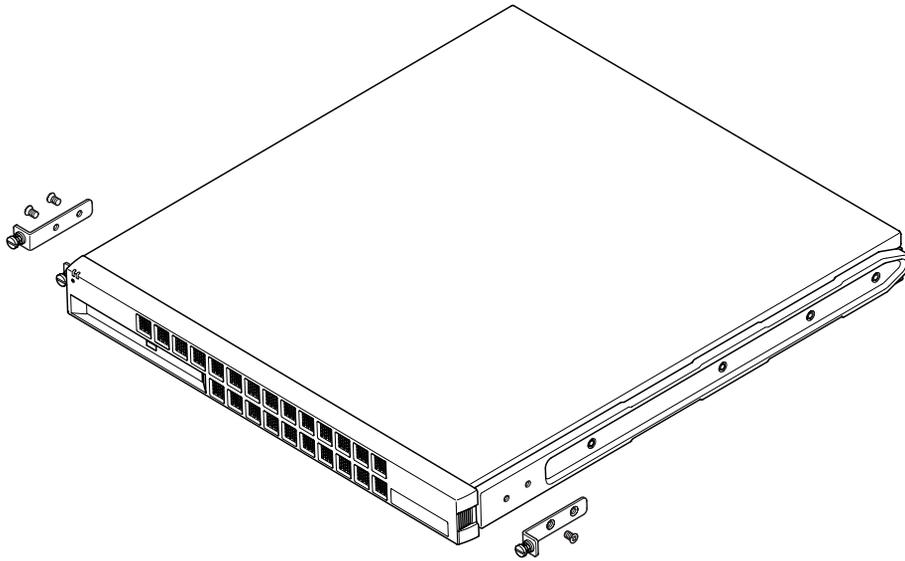


FIGURE 3-1 Removing the Thumbscrew Brackets (Netra T1 server shown)

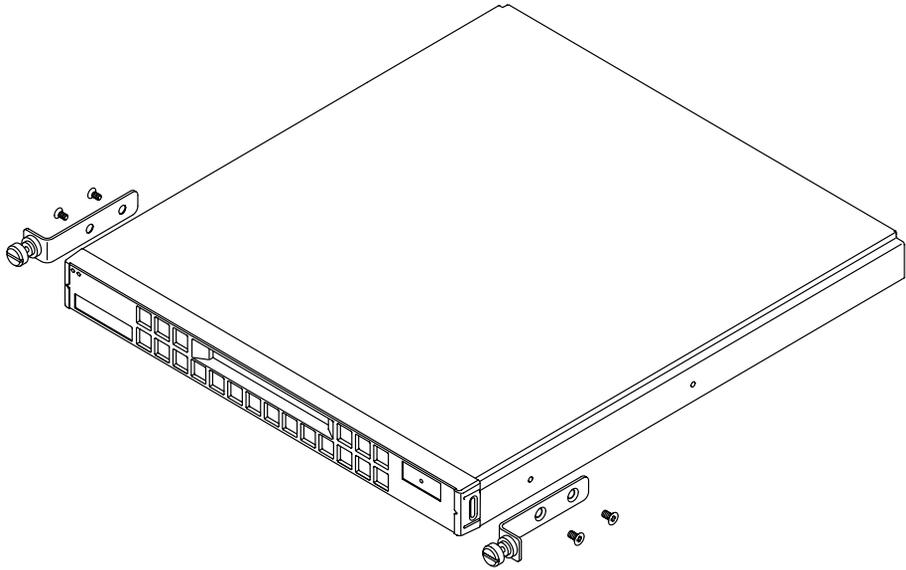


FIGURE 3-2 Removing the Thumbscrew Brackets (Netra t1 server shown)

2. Fit the two front fixed brackets to the rearmost two of the three tapped holes at the front of the system, using the Phillips-head countersunk screws provided.

Refer to FIGURE 3-3.

Note – Do not fit the rear brackets until Step 4

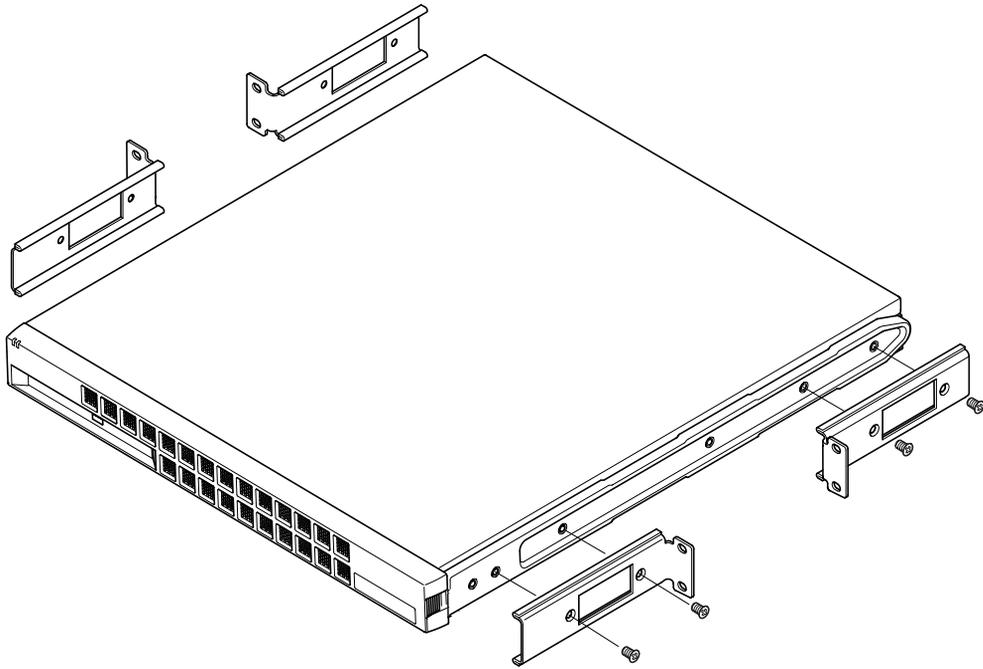


FIGURE 3-3 Fitting the Fixed Mounting Brackets (Netra T1 server shown)

- 3. Secure the system to the rack using just the front brackets, but do not fully tighten the screws at this stage.**

Refer to FIGURE 3-4 on page 21.

- 4. Fit the two rear fixed brackets to the two tapped holes at the rear of the system on each side, using the Phillips-head countersunk screws provided.**

Refer to FIGURE 3-4 on page 21.

- 5. Secure the rear brackets to the rack in the appropriate place.**

Refer to FIGURE 3-4 on page 21.

- 6. Once you are certain that all the rack fixing screws are correctly aligned, they can be fully tightened.**

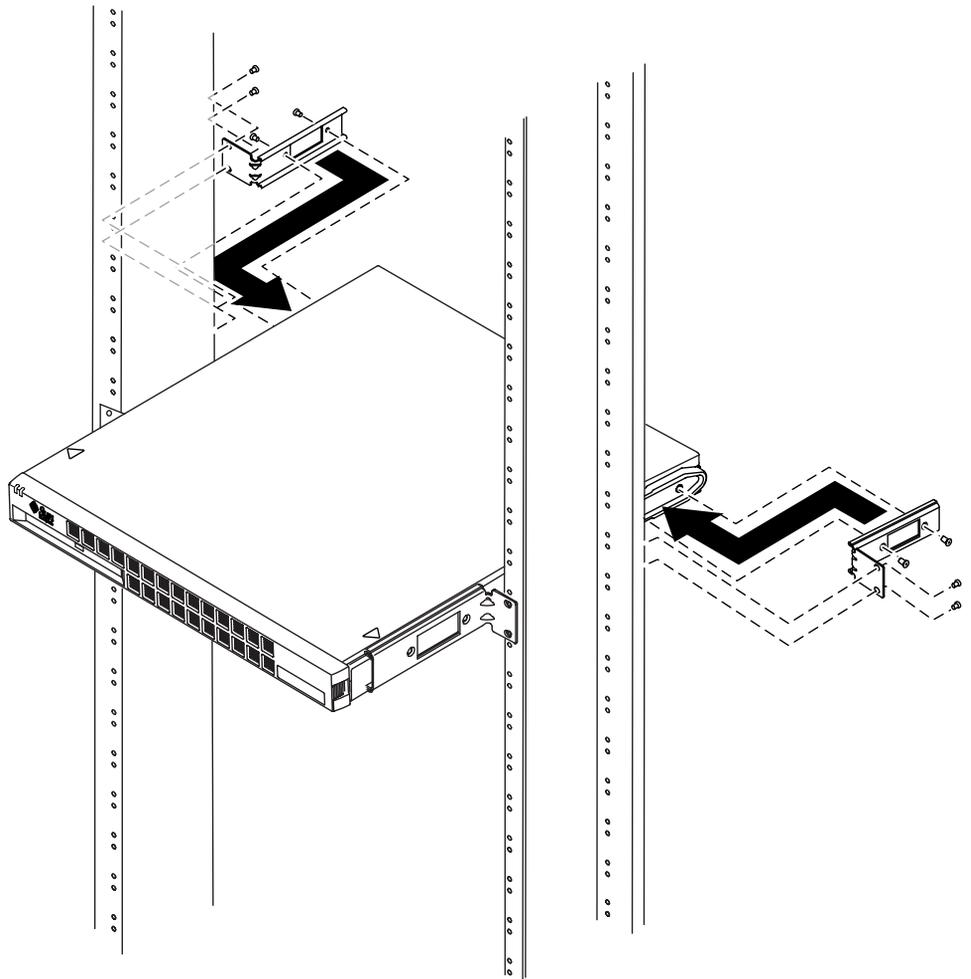


FIGURE 3-4 Using Fixed Brackets (Netra T1 server shown)

