



Sun Fire™ T2000 Server Overview Guide

Sun Microsystems, Inc.
www.sun.com

Part No. 819-2543-12
January 2007, Revision A

Submit comments about this document at: <http://www.sun.com/hwdocs/feedback>

Copyright 2007 Sun Microsystems, Inc., 4150 Network Circle, Santa Clara, California 95054, U.S.A. All rights reserved.

Sun Microsystems, Inc. has intellectual property rights relating to technology that is described in this document. In particular, and without limitation, these intellectual property rights may include one or more of the U.S. patents listed at <http://www.sun.com/patents> and one or more additional patents or pending patent applications in the U.S. and in other countries.

This document and the product to which it pertains are distributed under licenses restricting their use, copying, distribution, and decompilation. No part of the product or of this document may be reproduced in any form by any means without prior written authorization of Sun and its licensors, if any.

Third-party software, including font technology, is copyrighted and licensed from Sun suppliers.

Parts of the product may be derived from Berkeley BSD systems, licensed from the University of California. UNIX is a registered trademark in the U.S. and in other countries, exclusively licensed through X/Open Company, Ltd.

Sun, Sun Microsystems, the Sun logo, AnswerBook2, docs.sun.com, Solstice DiskSuite, Java, Sun Fire, and Solaris are trademarks or registered trademarks of Sun Microsystems, Inc. in the U.S. and in other countries.

All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. in the U.S. and in other countries. Products bearing SPARC trademarks are based upon an architecture developed by Sun Microsystems, Inc.

The OPEN LOOK and Sun™ Graphical User Interface was developed by Sun Microsystems, Inc. for its users and licensees. Sun acknowledges the pioneering efforts of Xerox in researching and developing the concept of visual or graphical user interfaces for the computer industry. Sun holds a non-exclusive license from Xerox to the Xerox Graphical User Interface, which license also covers Sun's licensees who implement OPEN LOOK GUIs and otherwise comply with Sun's written license agreements.

U.S. Government Rights—Commercial use. Government users are subject to the Sun Microsystems, Inc. standard license agreement and applicable provisions of the FAR and its supplements.

DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID.

Copyright 2007 Sun Microsystems, Inc., 4150 Network Circle, Santa Clara, Californie 95054, Etats-Unis. Tous droits réservés.

Sun Microsystems, Inc. a les droits de propriété intellectuels relatants à la technologie qui est décrit dans ce document. En particulier, et sans la limitation, ces droits de propriété intellectuels peuvent inclure un ou plus des brevets américains énumérés à <http://www.sun.com/patents> et un ou les brevets plus supplémentaires ou les applications de brevet en attente dans les Etats-Unis et dans les autres pays.

Ce produit ou document est protégé par un copyright et distribué avec des licences qui en restreignent l'utilisation, la copie, la distribution, et la décompilation. Aucune partie de ce produit ou document ne peut être reproduite sous aucune forme, par quelque moyen que ce soit, sans l'autorisation préalable et écrite de Sun et de ses bailleurs de licence, s'il y en a.

Le logiciel détenu par des tiers, et qui comprend la technologie relative aux polices de caractères, est protégé par un copyright et licencié par des fournisseurs de Sun.

Des parties de ce produit pourront être dérivées des systèmes Berkeley BSD licenciés par l'Université de Californie. UNIX est une marque déposée aux Etats-Unis et dans d'autres pays et licenciée exclusivement par X/Open Company, Ltd.

Sun, Sun Microsystems, le logo Sun, AnswerBook2, docs.sun.com, Solstice DiskSuite, Java, Sun Fire, et Solaris sont des marques de fabrique ou des marques déposées de Sun Microsystems, Inc. aux Etats-Unis et dans d'autres pays.

Toutes les marques SPARC sont utilisées sous licence et sont des marques de fabrique ou des marques déposées de SPARC International, Inc. aux Etats-Unis et dans d'autres pays. Les produits portant les marques SPARC sont basés sur une architecture développée par Sun Microsystems, Inc.

L'interface d'utilisation graphique OPEN LOOK et Sun™ a été développée par Sun Microsystems, Inc. pour ses utilisateurs et licenciés. Sun reconnaît les efforts de pionniers de Xerox pour la recherche et le développement du concept des interfaces d'utilisation visuelle ou graphique pour l'industrie de l'informatique. Sun détient une licence non exclusive de Xerox sur l'interface d'utilisation graphique Xerox, cette licence couvrant également les licenciées de Sun qui mettent en place l'interface d'utilisation graphique OPEN LOOK et qui en outre se conforment aux licences écrites de Sun.

LA DOCUMENTATION EST FOURNIE "EN L'ÉTAT" ET TOUTES AUTRES CONDITIONS, DECLARATIONS ET GARANTIES EXPRESSES OU TACITES SONT FORMELLEMENT EXCLUES, DANS LA MESURE AUTORISEE PAR LA LOI APPLICABLE, Y COMPRIS NOTAMMENT TOUTE GARANTIE IMPLICITE RELATIVE A LA QUALITE MARCHANDE, A L'APTITUDE A UNE UTILISATION PARTICULIERE OU A L'ABSENCE DE CONTREFAÇON.



Please
Recycle



Adobe PostScript

Contents

Preface v

Sun Fire T2000 Server Features 2

Features at a Glance 3

Chip-Multithreaded Multicore Processor and Memory Technology 5

Performance Enhancements 6

PreInstalled Solaris Operating System 6

Preloaded Java Enterprise System Software 7

Hardware-Assisted Cryptography 8

Remote Manageability With ALOM CMT 8

System Reliability, Availability, and Serviceability 9

Hot-Swappable Components 9

Power Supply Redundancy 9

Fan Redundancy 10

Environmental Monitoring 10

Support for RAID Storage Configurations 10

Error Correction and Parity Checking 11

Fault Management and Predictive Self Healing 11

Rackmountable Enclosure 11

Chassis Identification 12

Preface

The *Sun Fire T2000 Server Overview Guide* describes the hardware and software features for the Sun Fire™ T2000 server.

Sun Fire T2000 Server Documentation

You can view and print the following manuals from the Sun documentation web site at: <http://www.sun.com/documentation>

Title	Description	Part Number
<i>Sun Fire T2000 Server Site Planning Guide</i>	Site planning information for the Sun Fire T2000 server	819-2545
<i>Sun Fire T2000 Server Product Notes</i>	Late-breaking information about the server. The latest notes are posted at: http://www.sun.com/documentation	819-2544
<i>Sun Fire T2000 Server Getting Started Guide</i>	Information about where to find documentation to get your system installed and running quickly	819-2542
<i>Sun Fire T2000 Server Installation Guide</i>	Detailed rackmounting, cabling, power-on, and configuration information	819-2546
<i>Sun Fire T2000 Server Administration Guide</i>	How to perform administrative tasks that are specific to the Sun Fire T2000 server	819-2549
<i>Sun Fire T2000 Server Service Manual</i>	How to run diagnostics to troubleshoot your server and how to remove and replace parts in the server	819-2548
<i>Advanced Lights Out Management (ALOM) CMT vx.x Guide</i>	How to use the Advanced Lights Out Management (ALOM) CMT software.	Varies, based on version

Accessing Sun Documentation

You can view, print, or purchase a broad selection of Sun documentation, including localized versions, at:

<http://www.sun.com/documentation>

Third-Party Web Sites

Sun is not responsible for the availability of third-party web sites mentioned in this document. Sun does not endorse and is not responsible or liable for any content, advertising, products, or other materials that are available on or through such sites or resources. Sun will not be responsible or liable for any actual or alleged damage or loss caused by or in connection with the use of or reliance on any such content, goods, or services that are available on or through such sites or resources.

Documentation, Support, and Training

Sun Function	URL
Documentation	http://www.sun.com/documentation/
Support	http://www.sun.com/support/
Training	http://www.sun.com/training/

Sun Welcomes Your Comments

Sun is interested in improving its documentation and welcomes your comments and suggestions. You can submit your comments by going to:

<http://www.sun.com/hwdocs/feedback>

Please include the title and part number of your document with your feedback:

Sun Fire T2000 Server Overview Guide, part number 819-2543-12

Sun Fire T2000 Server Features

This chapter describes the features of the Sun Fire T2000 server. The following topics are covered:

- [“Sun Fire T2000 Server Features” on page 2](#)
- [“Features at a Glance” on page 3](#)
- [“Chassis Identification” on page 12](#)

Sun Fire T2000 Server Features

The Sun Fire T2000 server is a scalable and reliable high-performance, entry-level server, offering the following characteristics:

- Space efficient, rack-optimized 2U form factor for horizontally scaled environments.
- Chip multithreading technology (CMT) in the UltraSPARC® T1 processor with CoolThreads™ technology offering four, six, or eight cores, with four threads per core for improved throughput and reduced power consumption.
- Four on-board Ethernet ports providing efficient integration and connectivity.

Investment protection with SPARC® V9 binary application compatibility and the Solaris™ 10 Operating System. The Solaris 10 OS also provides features such as Solaris Predictive Self-Healing, Solaris Dynamic Tracing, and support across UltraSPARC platforms.

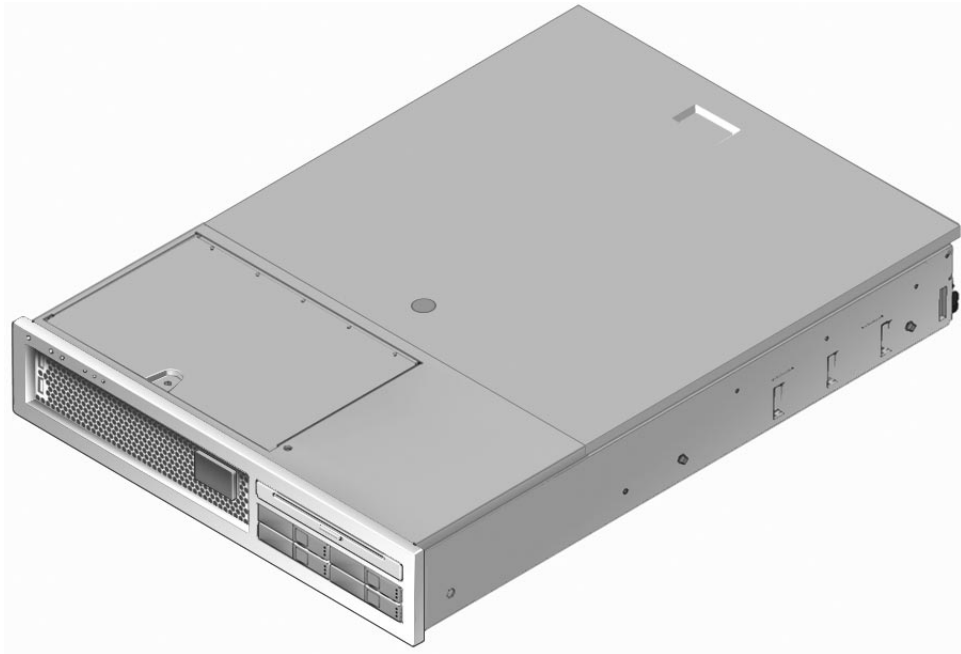


FIGURE 1 Sun Fire T2000 Server

Features at a Glance

TABLE 1 Sun Fire T2000 Server Features at a Glance

Feature	Description
Processor	1 UltraSPARC T1 multicore processor (4, 6, or 8 cores)
Architecture	SPARC V9 architecture, ECC protected Platform group: sun4v Platform name: SUNW,Sun-Fire-T200
Memory	16 slots that can be populated with one of the following types of DDR-2 DIMMS: <ul style="list-style-type: none">• 512 MB (8 GB maximum)• 1 GB (16 GB maximum)• 2 GB (32 GB maximum)• 4GB (64 GB maximum)
Ethernet ports	4 ports, 10/100/1000 Mb autonegotiating
Internal hard drives	1-4 SFF SAS 73 GB, 10k rpm, 2.5-inch form factor drives (hot pluggable)
Other internal peripherals	1 slimline DVD-R/CD-RW device
USB ports	4 USB 1.1 ports (2 in front and 2 in rear)
Cooling	3 hot-swappable and redundant system fans and 1 blower unit
PCI interfaces	3 PCI Express (PCI-E) slots that support* cards with the following specifications: <ul style="list-style-type: none">• low-profile• x1, x4, and x8 width• 12v and 3.3v as defined by the PCI Express specification 2 PCI-X slots that support* cards with the following specifications: <ul style="list-style-type: none">• 64-bit, 133 MHz• low-profile• 3.3v (5v is also supplied, as defined by the PCI-X specification, using a 3.3V form factor connector) Note: Depending on the server model, one PCI-X slot might be occupied with a disk controller card. Refer to the <i>Sun Fire T2000 Server Service Manual</i> for details.
Power	2 hot-swappable and redundant power supply units (PSUs) Refer to the <i>Sun Fire T2000 Server Site Planning Guide</i> for power and environmental specifications.
Remote management	ALOM CMT management controller with a serial and 10/100 Mb Ethernet port

TABLE 1 Sun Fire T2000 Server Features at a Glance

Feature	Description
Firmware	System Firmware comprising: <ul style="list-style-type: none">• OBP for system settings and power-on self test (POST) support• ALOM CMT for remote management administration
Cryptography	Hardware-assisted cryptographic acceleration
Operating system	Solaris™ 10 Operating System preinstalled on disk 0 Refer to the <i>Sun Fire T2000 Server Product Notes</i> for information on the minimum version of supported OS and required patches.
Other software	Java™ Enterprise System with a 90-day trial licence
Other	Some models [†] of this server comply with the Restriction of Hazardous Substances (RoHS) directive 2002/95/EC.H. Refer to the <i>Sun Fire T2000 Server Installation Guide</i> for certification information.

* PCI-E and PCI-X specifications described in this table list the physical requirements for PCI cards. Additional support capabilities must also be provided (such as device drivers) for a PCI card to function in the server. Refer to the specifications and documentation for a given PCI card to determine if the required drivers are provided that enable the card to function in this server.

† To determine if a given Sun Fire T2000 server meets this directive, at the ALOM CMT `sc>` prompt, issue the `showfru -s MB` command. If the `SpecPartNo` is 885-0481, the system is not certified for the RoHS directive. If the `SpecPartNo` is 885-0689, the system meets the RoHS directive.

Refer to the *Sun Fire T2000 Server Service Manual* for hardware configuration information. Refer to the *Sun Fire T2000 Server Administration Guide* for administrative tasks that are specific to this server.

Chip-Multithreaded Multicore Processor and Memory Technology

The UltraSPARC® T1 multicore processor is the basis of the Sun Fire T2000 server. The UltraSPARC T1 processor is based on chip multithreading (CMT) technology that is optimized for highly threaded transactional processing. The UltraSPARC T1 processor improves throughput while using less power and dissipating less heat than conventional processor designs.

Depending on the model purchased, the processor has four, six, or eight UltraSPARC cores. Each core equates to a 64-bit execution pipeline capable of running four threads. The result is that the 8-core processor handles up to 32 active threads concurrently.

Additional processor components, such as L1 cache, L2 cache, memory access crossbar, DDR2 memory controllers, and a JBus I/O interface have been carefully tuned for optimal performance. See [FIGURE 2](#).

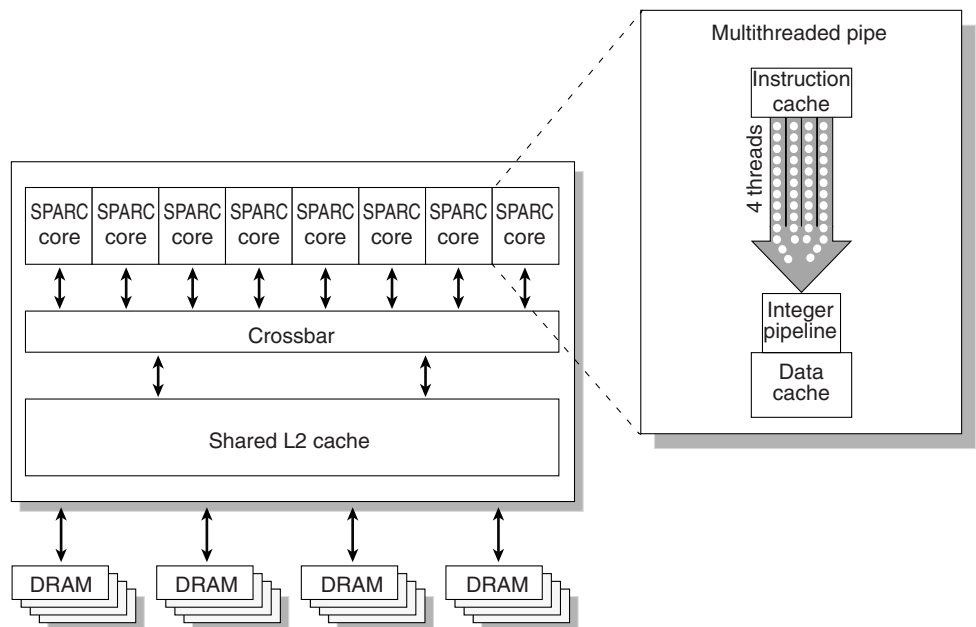


FIGURE 2 UltraSPARC T1 Multicore Processor Block Diagram

Performance Enhancements

The Sun Fire T2000 server running the Solaris 10 OS provides several new performance enhancing technologies with its sun4v architecture and multicore multithreaded UltraSPARC T1 multicore processor.

Some of these enhancements are:

- Large page optimization
- Reduction on TLB misses
- Optimized block copy
- Improved web services performance through the kernel-level SSL proxy Solaris 10 OS feature

PreInstalled Solaris Operating System

The Sun Fire T2000 server is preinstalled with the Solaris 10 Operating System (Solaris OS), and offers the following Solaris OS features:

- Stability, high performance, scalability, and precision of a mature 64-bit operating system
- Support for over 12,000 leading technical and business applications
- Solaris Containers – Isolate software applications and services using flexible, software-defined boundaries.
- DTrace – A comprehensive dynamic tracing framework for tuning applications and troubleshooting systemic problems in real time.
- Predictive Self-Healing – Capability that automatically diagnoses, isolates, and recovers from many hardware and application faults.
- Security – Advanced security features designed to protect the enterprise at multiple levels.
- Network Performance – Completely rewritten TCP/IP stack dramatically improves the performance and scalability of your networked services.

If you prefer to install the Solaris OS rather than use the preinstalled Solaris OS, you can do so. The Sun Fire T2000 server supports Solaris 10 OS. For possible updates to supported Solaris releases, refer to the *Sun Fire T2000 Server Product Notes*.

Preloaded Java Enterprise System Software

The Sun Fire T2000 server is preinstalled with Java™ Enterprise System software and includes a free 90-day evaluation license for the following Java Enterprise System software applications:

- Access Manager – A security foundation that helps manage secure access to an enterprises' web applications by offering single sign-on (SSO) as well as enabling federation across trusted networks.
- Application Server – Provides a Java 2 Platform, Enterprise Edition (J2EE platform) 1.4 compatible platform for developing and delivering server-side Java applications and web services.
- Calendar Server – A Web-based tool that facilitates team collaboration by enabling users to manage and coordinate appointments, events, tasks, and resources.
- Cluster software – Delivers high availability to enterprise system applications.
- Directory Server – User-management infrastructure for enterprises that manage high volumes of user information by providing a centralized repository for storing and managing user profiles and access privileges, as well as application and network resource information.
- Directory Proxy Server – Provides secure firewall-like services for the Directory Server.
- Instant Messaging – A standards-based, real-time communication and collaboration application.
- Message Queue – An enterprise-level message server using a standards-based (JMS) messaging solution.
- Messaging Server – A high-performance, highly secure messaging platform that provides security features that help ensure the integrity of communications.
- Portal Server – Provides portal services that identify users through centralized identity services using roles, and policies.
- Web Server – A secure, reliable, easy-to-use web server designed for medium and large business applications.

To gain the benefits of the Java Enterprise System, you can buy a subscription license for a Java Enterprise System Suite, or a combination of Java System Suites.

Hardware-Assisted Cryptography

The UltraSPARC T1 multicore processor provides hardware-assisted acceleration of RSA and DSA cryptographic operations. The Solaris 10 Operating System provides the multithreaded device driver (ncp device driver) that supports the hardware-assisted cryptography.

Remote Manageability With ALOM CMT

The Advanced Lights Out Management (ALOM CMT) feature is a system controller that enables you to remotely manage and administer the Sun Fire T2000 server.

The ALOM CMT software is preinstalled as firmware, and initializes as soon as you apply power to the system. You can customize ALOM CMT to work with your particular installation.

ALOM CMT enables you to monitor and control your server over a network, or by using a dedicated serial port for connection to a terminal or terminal server. ALOM CMT provides a command-line interface that you can use to remotely administer geographically distributed or physically inaccessible machines. In addition, ALOM CMT enables you to run diagnostics (such as POST) remotely that would otherwise require physical proximity to the server's serial port.

You can configure ALOM CMT to send email alerts of hardware failures, hardware warnings, and other events related to the server or to ALOM CMT. The ALOM CMT circuitry runs independently of the server, using the server's standby power. Therefore, ALOM CMT firmware and software continue to function when the server operating system goes offline or when the server is powered off. ALOM CMT monitors the following Sun Fire T2000 server components:

- CPU temperature conditions
- Disk drive status
- Enclosure thermal conditions
- Fan speed and status
- Power supply status
- Voltage conditions

For information about configuring and using the ALOM system controller, refer to the *Advanced Lights Out Management (ALOM) CMT Guide*.

System Reliability, Availability, and Serviceability

Reliability, availability, and serviceability (RAS) are aspects of a system's design that affect its ability to operate continuously and to minimize the time necessary to service the system. Reliability refers to a system's ability to operate continuously without failures and to maintain data integrity. System availability refers to the ability of a system to recover to an operational state after a failure, with minimal impact. Serviceability relates to the time it takes to restore a system to service following a system failure. Together, reliability, availability, and serviceability features provide for near continuous system operation.

To deliver high levels of reliability, availability, and serviceability, the Sun Fire T2000 server offers the following features:

- Hot-swappable hard drives
- Redundant, hot-swappable power supplies (two)
- Redundant hot-swappable fan units (three) and one blower unit
- Environmental monitoring
- Internal hardware drive mirroring (RAID 1) and striping (RAID0)
- Error detection and correction for improved data integrity
- Easy access for most component replacements

For more information about using RAS features, refer to the *Sun Fire T2000 Server Administration Guide*.

Hot-Swappable Components

Sun Fire T2000 server hardware is designed to support hot-swapping of the chassis-mounted hard drives, fan units, and power supplies. By using the proper software commands, you can install or remove these components while the system is running. Hot-swap technology significantly increases the system's serviceability and availability by providing the ability to replace hard drives, fan units, and power supplies without service disruption.

Power Supply Redundancy

The Sun Fire T2000 server features two hot-swappable power supplies, enabling the system to continue operating should one of the power supplies fail or if one power source fails.

The Sun Fire T2000 server also has a single hot-swappable blower unit that works in conjunction with the power supply fans to provide cooling for the internal disk drives. If the blower unit fails, the three functioning fan units provide enough cooling to keep the system running.

Fan Redundancy

The Sun Fire T2000 server features three hot-swappable system fans. The fans enable the system to continue operating with adequate cooling in the event that one of the fans fails.

Environmental Monitoring

The Sun Fire T2000 server server features an environmental monitoring subsystem protects the server and its components against:

- Extreme temperatures
- Lack of adequate airflow through the system
- Power supply failures
- Hardware faults

Temperature sensors are located throughout the system to monitor the ambient temperature of the system and internal components. The software and hardware ensure that the temperatures within the enclosure do not exceed predetermined safe operation ranges. If the temperature observed by a sensor falls below a low-temperature threshold or rises above a high-temperature threshold, the monitoring subsystem software lights the amber Service Required LEDs on the front and back panel. If the temperature condition persists and reaches a critical threshold, the system initiates a graceful system shutdown. In the event of a failure of the system controller, backup sensors protect the system from serious damage, by initiating a forced hardware shutdown.

All error and warning messages are logged in the ALOM CMT event log and are optionally sent to the system controller (SC) system console. Service Required LEDs remain lit after an automatic system shutdown to aid in problem diagnosis.

The power subsystem is monitored in a similar fashion by monitoring power supplies and reporting any fault in the front and rear panel LEDs.

If a power supply problem is detected, an error message is logged in the ALOM CMT event log and optionally sent to the SC system console. Additionally, LEDs located on each power supply light to indicate failures. The system Service Required LED lights to indicate a system fault.

Support for RAID Storage Configurations

You can set up a hardware RAID 1 (mirroring) and hardware RAID 0 (striping) configurations for any pair of internal hard drives, providing a high-performance solution for hard drive mirroring.

By attaching one or more external storage devices to the Sun Fire T2000 server, you can use a redundant array of independent drives (RAID) software application such as Solstice DiskSuite™ or VERITAS Volume Manager to configure system drive storage in a variety of different RAID levels.

Error Correction and Parity Checking

The UltraSPARC T1 multicore processor provides parity protection on its internal cache memories, including tag parity and data parity on the D-cache and I-cache. The internal 3MB L2 cache has parity protection on the tags, and ECC protection on the data.

Advanced ECC, also called chipkill, corrects up to 4-bits in error on nibble boundaries, as long as they are all in the same DRAM. If a DRAM fails, the DIMM continues to function.

Fault Management and Predictive Self Healing

The Sun Fire T2000 server features the latest fault management technologies. The Solaris 10 OS architecture provides a means for building and deploying systems and services capable of *predictive self-healing*. Self-healing technology enables systems to accurately predict component failures and mitigate many serious problems before they actually occur. This technology is incorporated into both the hardware and software of the Sun Fire T2000 server.

At the heart of the predictive self-healing capabilities is the Solaris Fault Manager, a new service that receives data relating to hardware and software errors, and automatically and silently diagnoses the underlying problem. Once a problem is diagnosed, a set of agents automatically responds by logging the event, and if necessary, takes the faulty component offline. By automatically diagnosing problems, business-critical applications and essential system services can continue uninterrupted in the event of software failures, or major hardware component failures.

Rackmountable Enclosure

The Sun Fire T2000 server uses a space-saving 2U-high rackmountable enclosure that can be installed into a variety of industry standard racks.

Chassis Identification

The following figures show the physical characteristics of the Sun Fire T2000 server.

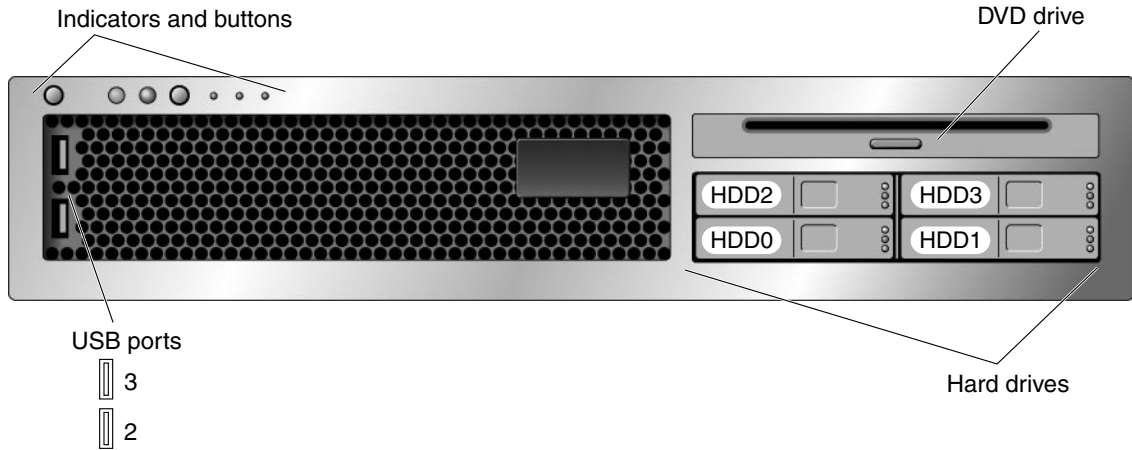


FIGURE 3 Sun Fire T2000 Server Front Panel

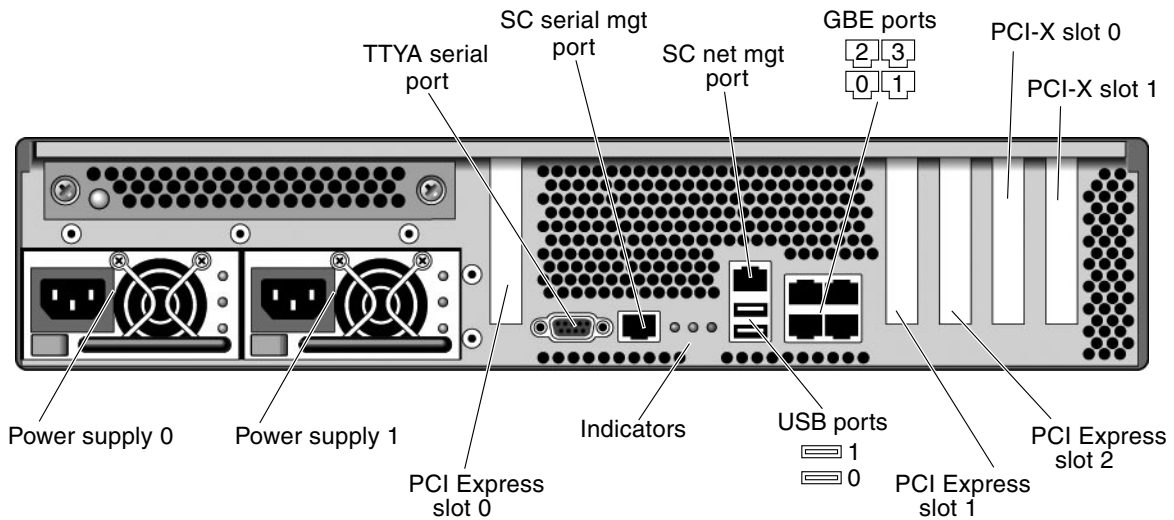


FIGURE 4 Sun Fire T2000 Server Rear Panel

For details on how to install the server refer to the *Sun Fire T2000 Server Installation Guide*.