Oracle
Primavera Unifier
Integration Interface Guide

Version 23
July 2025

Oracle Primavera Unifier Integration Interface Guide

Copyright © 1998, 2025, Oracle and/or its affiliates.

Primary Author: Oracle Corporation

Contents

Introduction 13
Security 15
List of Updated Topics 17
Integration Users 21
Unifier Web Services 23
Internationalization and Web Services 23
Number formatting of data 24
Get Web Services 24
General Validation Rules Across all Services 24
General Limitations Across all Services 25
Pickers 26
File Size Limit for REST APIs 27
Known Issues Across all Services 27
Business Process (BP) Picker Support 28
Business Process (BP) Record Data Processing Rules 28
Creating and Updating Schedule Sheet 29
Data Mapping 30
Associate CBS Codes with Activities 33
Simple Object Access Protocol (SOAP) Web Services 35
Resource Manager Methods 35
Create and/or update Role 35
Get Role List 36
Create and/or update Resource 38
Get Resource List 39
Space Manager Methods 40
Create Level 40
Update Level 41
Get Level List 42
Create Space 43
Update Space 44
Get Space List 45
Planning Manager Methods 46
Get Planning Item Record 46
User Administration Methods 48
Create User 48

Update User 51
Get User List 52
Update User Group Membership 53
Update User Shell Membership 55
Schedule of Values (SOV) Methods 56
Get SOV 56
Exchange Rates Methods 57
Update Exchange Rates 58
Get Exchange Rates 59
Configurable Manager Methods 60
Create Records in Code and Records-based Generic Manager 60
Update Records in Code and Records-based Generic Manager 61
Shell Methods 63
Create Shell 63
Update Shell 67
Get Shell List 69
Get Project/Shell List 70
Schedule Manager Methods 72
Create Schedule Sheet Activities from Primavera P5 and P6 XML 72
Create Schedule Sheet Activities V2 from Oracle Primavera P6 XML 73
Create Schedule Activities from file V2 76
Update Schedule Sheet Activities from Oracle Primavera P5 and P6 XML 79
Update Schedule Sheet Activities V2 from Oracle Primavera P6 XML 80
Update Schedule Activities From File V2 84
Get Schedule Sheet Activities from Unifier 87
Get a List of Project Schedule Sheets 88
Get a List of Schedule Sheet Data Mappings 90
User Defined Reports (UDR) Methods 91
Get UDR Data 91
Cost Sheet Methods 93
Get Column Data 93
Update Column Data 96
Business Process (BP) Methods 98
Create BP Record 98
Create BP Record (Additional Information) 102
Create Complete BP Record 107
Create Complete BP Record (Additional Information) 111
Add BP Line Item 113
Add BP Line Item (Additional Information) 117
Add Complete BP Line Item 117
Add Complete BP Line Item (Additional Information) 121
Update BP Record 123
Update BP Record (Additional Information) 124

Update Complete BP Record 124
Update Complete BP Record (Additional Information) 127
Update BP Record V2 127
Update BP Record V2 (Additional Information) 129
Get BP Record 136
Get BP Record (Additional Information) 137
Get BP List 138
Get BP List (Additional Information) 140
Get Complete BP Record 141
Get Complete BP Record (Additional Information) 142
CBS Code Methods 143
Get CBS Structure 144
Create CBS Code 144
Get CBS Codes 146
Update CBS Codes 147
Sort Cost Sheet 149
Accessing Representational State Transfer (REST) Services V1 and V2 153
Setting Up Integration Users with Basic Authentication 153
V1 Get Token REST Service for Basic Authentication 154
V2 Get Token REST Service for Basic Authentication 155
Setting Up Integration Users with OAuth Authentication 157
V1 Get Token REST Service for OAuth Authentication 158
V2 Get Token REST Service for OAuth Authentication 159
Representational State Transfer (REST) Web Services V1 163
Document Manager 166
Folder Services 166
Create Folders by Path 166
Create Folders by Parent Folder ID 171
Update Folder Meta Data by Path 176
Update Folder Meta Data by Folder ID 181
Get Folders or Documents Meta Data by Path 184
Get Folders or Documents Meta Data by Parent Folder ID 187
Document Services 190
Create Documents by Path 190
Create Documents by Parent Folder ID 192
Update Documents Meta Data by Path 193
Update Document Meta Data by Document ID 195
Get Documents by Path 196
Get Documents by Parent Folder ID 198
Get Document as Tiff File 200
Get Document by File ID 200
Search Document or Folder Properties 200
Rename a Node by Node ID 203

Rename Unpublished Document by File ID 204
Get Node Permissions by Node Path and Project Number 206
Get Node Permissions by Node Path, Project Number, and User or Group 208
Add Node Permissions by Node Path and Project Number 211
Update Node Permissions by Node Path and Project Number 213
Remove Node Permissions by Node Path and Project Number 215
Remove Node Permissions by Node Path, Project Number, and User or Group 216
Set Permissions in Document Manager 217
Granting, Inheriting, and Pushing permissions to files or folders 218
Removing Permissions to Files or Folders 219
Get Permissions on Files or Folders 219
Business Processes 219
Fetch BP Record List 219
Get BP Record 227
Get BP Record With Attachments 231
Create BP Record 239
Update BP Record 247
Update BP Record with Attachment 254
Create BP Record with Attachment 262
Fetch BP Record List with filter_criteria 271
Payment Application with Auto-populate from SOV and Commits 275
Bulk Create Records 275
Bulk Update Records 277
Bulk Reverse Auto-populate Records 278
Asynchronous Bulk BP Operations 280
Asynchronous REST Call Status 282
Fetch List of Attached Files in a BP 282
Download a Single Attached File in a BP 286
Download Multipart or Large Files 286
Shell Manager 288
Create Shell 288
Update Shell 290
Get Shell 291
Get BPs in Shell or Company 293
Get Project Shell List 295
Level 296
Authorization 296
Response Error Codes 297
Get Level List 297
Create Level 300
Update Level 302
Space 304
Authorization 304

Response Error Codes 304
Get Space List 305
Create Space 308
Update Space 311
Cost 313
Get CBS Codes 313
Get CBS Codes Sample Response 314
Create CBS Codes 316
Update CBS Codes 318
Get Column Data 320
Update Column Data 322
Sort Cost Sheet 325
Cash Flow 327
Authorization 327
Definitions or Values Used 328
Response Error Codes (REST API Details in Cash Flow) 331
Create Cash Flow 337
Create Cash Flow From Template Only 338
Create Cash Flow Manual - Project or Shell 338
Create Cash Flow Manual - CBS 341
Create Cash Flow Manual - Summary CBS 345
Create Cash Flow Manual - Commitment 346
Create Summary Curve 348
Create Rollup Cash Flows for Company 350
Update Rollup Cash Flows for Company 353
Delete Cash Flow 356
Delete Cash Flow Curve 358
Delete Cash Flow - Summary Curves 359
Get Cash Flow Data 360
Get Summary Cash Flow Data 364
Get Rollup Status 368
Get Rollup Status - for Template Cash Flows 369
Update Rollup Status 370
Update Rollup Status - For Template Cash Flows 371
Refresh Cash Flow 373
Get Cash Flow Refresh Job Status 374
Get Cash Flow Properties 375
Get Summary Cash Flow Properties 400
Get Cash Flow Permissions 402
Get Distribution Profiles 404
Create (Add User or Group) Cash Flow Permission 405
Delete (Remove User or Group) Cash Flow Permission 409
Update Cash Flow 411

Update or Modify Cash Flow Permission 416
Update Cash Flow Data 422
Update Cash Flow Schedule 425
Create Distribution Profiles 426
Update Distribution Profiles 429
Delete Distribution Profiles 432
Refresh Cash Flow Curves 433
Refresh Cash Flow Sample 434
Get Cash Flow Permissions 435
Refresh Cash Flow 435
Schedule Sheet 437
Get Schedule Sheet Data Mapping 437
Get Schedule Sheets 438
Update Schedule Activities 439
Response Codes 440
Exchange Rates 440
Get Exchange Rates 440
Update Exchange Rates 442
Data Structure Setup 444
Authorization 444
Get Data Elements 444
Create Data Element 445
Update Data Element 448
Delete Data Elements 450
Create DDS Definition 451
Update DDS Definition 455
Delete DDS Definition 458
Get DDS Definition 459
Create DDS Data 461
Update DDS Data 464
Delete DDS Data 466
Get DDS Data 467
Get Data Definition 469
Create Data Definition 474
Update Data Definition 484
Delete Data Definition 491
Response Error Codes 492
Partner Company 494
Get Partner Company 508
Create Partner Company 510
Update Partner Company 512
Update Partner Company Shortname 513
Add (Update) Partner Company Shell Membership 513

Remove (Update) Partner Company Shell Membership 515
User 516
Get User 516
Create User 516
Update User 519
Update User Shell Membership 520
Update User Group Membership 521
User Defined Report (UDR) 521
Passing Values to UDR 522
Get Templates List 524
Project or Shell Sample 525
Data 527
Data Format 527
Data Transfer 528
Event Driven Notification 528
Get Event Driven Notification 529
Funding 530
Get Funds List 530
Create Fund 532
Update Fund 534
Delete Fund 535
Manual Fund Consumption 537
Get Fund Columns 543
Get Fund Assignment Order 544
Get Fund Assignment Order for Cost Sheet 545
Update Fund Assignment Order 547
Update Fund Assignment Order for Cost Sheet 548
Update Fund Status 550
Get Fund Consumption for CBS Level SOV (Auto-Order / Auto-Ratio) 551
Update Fund Consumption for CBS Level SOV (Auto-Order / Auto-Ratio) 557
Response Error Codes (Funding REST API Details) 563
Non-Workflow BP Permissions 567
Get BP Records Permission 567
Get BP Permission Sample Response 569
Update/Modify BP Records Permission 570
Update/Modify BP Records Permission Sample Response 572
Create (Add User/Group) BP Records Permission 575
Create (Add User/Group) BP Records Permission Sample Response 576
Delete (Remove User/Group) BP Records Permission 578
Delete (Remove User/Group) BP Records Permission Sample Response 579
Representational State Transfer (REST) Web Services V2 581
Business Processes 584
Create BP Record 584

Update BP Record 590
Update BP Record with Attachment 597
Create BP Record with Attachment 606
Response Error Codes 616
Payment Application with Auto-populate from SOV and Commits 617
Get BP Record Permission 617
Update BP Record Permission 619
Add Assignees to Workflow BP Records 622
Shell Manager 627
Create Shell 627
Update Shell 644
Get Shell 646
WBS Sheet 649
Create WBS Code 649
Get External WBS Sheet Data 653
Master Rate Sheet 654
Create and Update Resources in the Master Rate Sheet 654
Create and Update Roles in the Master Rate Sheet 658
Get Resources from the Master Rate Sheet 662
Get Roles from the Master Rate Sheet 671
Cash Flow 677
Create Snapshot in Cashflow Curve 677
Delete Snapshot from Cashflow Curve 678
Get Snapshot Names for the Selected Cashflow 680
Activities and Assignments 681
Create, Update, and Remove Assignments 681
Create or Update Assignment Spreads 728
Get Spread Job Status 745
Create or Update Activity Spreads 745
Create, Update, and Remove Activities from the System Activity Sheet of a Specific Shell 755
Get Activities from the System Activity Sheet of a Specific Shell 774
Create, Update, and Delete Activities in the Manual Activity Sheet of a Specific Shell 780
Get Activities in the Manual Activity Sheet of a Specific Shell 813

Codes Used in Web Services 817

Currency 817
Currencies and codes (A-G) 817
Currencies and codes (H-N) 819
Currencies and codes (O-T) 821
Currencies and codes (U-Z) 822
Time Zone 823
Date Format 828
User Type 829

Company Address....829
Status....830
Check Box....830
Appendix A: Return Values....831

Introduction

The interface to integrate Unifier and an external system is based on Simple Object Access Protocol (SOAP) and Representational State Transfer (REST) web services.

This document describes how to use the web services for:

- Integration and passing data
- Codes used in web services
- Return values

> **Note:** Oracle develops all new web services as Representational State Transfer (RESTful or REST) web services and not Simple Object Access Protocol (SOAP) web services. Support for SOAP services is deprecated beginning with version 23.5. Oracle recommends that the new integrations use RESTful web services.

The following services are included in the Web Service Description Language (WSDL) file, but these services are reserved for internal use only (not for customer use):

- createSapBPRecord
- getSapBPList
- getSapBPRecord
- updateSapBPRecord
- Ping
- getTransactionStatus

> **Note**: Unifier contains a number of additional RESTful web services that are not documented in this guide. These RESTful web services are subject to change, for internal purposes only, and must not be used.

Within our documentation, some content might be specific for cloud deployments while other content is relevant for on-premises deployments. Any content that applies to only one of these deployments is labeled accordingly.

Security

Unifier web services and RESTful services are sent and received through a secured server using "https" protocol. After https is set up at both ends, the client must accept the server certificate to continue with the Integration procedure.

The system also requires clients to register Unifier with the `shortname` (the Company identifier) and `authcode` (the Company authentication code).

> **Note**: Web services calls can only be made using Owner Company details.

List of Updated Topics

Here is a list of topics that have been updated:

Date	Topics
July 2025	**V2 REST Services** Updated the following service: --WBS Sheet ▸ Create WBS Code
April 2025	**V2 REST Services** Updated the following service: --Business Processes ▸ Add Assignees to Workflow BP Records
August 2024	**SOAP Services** Updated the following services: ▸ Update User Group Membership ▸ Update User Shell Membership **V1 REST Services** Updated the following services: --Folder Services ▸ Create Folders by Path ▸ Create Folders by Parent Folder ID ▸ Update Folders Meta Data by Path ▸ Update Folder Meta Data by Folder ID ▸ Get Folders or Documents Meta Data by Path ▸ Get Folders or Documents Meta Data by Parent Folder ID --Business Processes ▸ Update BP Record ▸ Update BP Record with Attachment --User ▸ Update User Shell Membership ▸ Update User Group Membership --User Defined Report (UDR) **V2 REST Services** Updated the following services: --Shell Manager ▸ Create Shell

Date	Topics
	--Activities and Assignments ▸ Create, Update, and Remove Assignments
December 2023	All topics in the Accessing Representational State Transfer (REST) Services V1 and V2 section **V2 REST Services** Updated the following services: --Business Processes ▸ Add Assignees to Workflow BP Records --Activities and Assignments ▸ Create, Update, and Remove Activities from the System Activity Sheet of a Specific Shell ▸ Get Activities from the System Activity Sheet of a Specific Shell ▸ Create, Update, and Delete Activities in the Manual Activity Sheet of a Specific Shell ▸ Get Activities in the Manual Activity Sheet of a Specific Shell
November 2023	**V1 REST Services** Updated the following services: --Shell Manager ▸ Create Shell ▸ Update Shell ▸ Get Shell **V2 REST Services** Updated the following services: --Shell Manager ▸ Create Shell ▸ Update Shell ▸ Get Shell
October 2023	Updated the following topics: ▸ Introduction ▸ Simple Object Access Protocol (SOAP) Web Services
April 2023	Updated the following topics: ▸ Introduction ▸ Integration Users ▸ Unifier Web Services **SOAP Services** Updated the following services: --Business Process (BP) Methods:

Date	Topics
	▸ Update BP Record V2 ▸ Update BP Record V2 (Additional Information) ▸ Get Complete BP Record --Representational State Transfer (REST) Web Services V1 and V2 --Representational State Transfer (REST) Web Services V1 --Business Processes ▸ Fetch List of Attached Files in a BP ▸ Download a Single Attached File in a BP ▸ Download Multipart or Large files --Shell Manager ▸ Get Shell --Cost ▸ Sort Cost Sheet --Cash Flow ▸ Authorization ▸ Create Cash Flow -Create Cash Flow Manual - Project or Shell ▸ Delete Cash Flow ▸ Delete Cash Flow Curve ▸ Delete Cash Flow - Summary Curves ▸ Get Cash Flow Properties ▸ Update Cash Flow ▸ Update Cash Flow Schedule **V1 REST Services** Updated the following service: ▸ Business Processes

Integration Users

The system supports the creation of integration users in **User Administration** for different permissions towards SOAP and REST services.

> **Note**: Oracle develops all of the new web services as RESTful web services and not SOAP web services. Oracle recommends that the new integrations use RESTful web services.

The *username* and *password* for these integration users can be used in SOAP services instead of the *shortname* (the Company identifier) and *authcode* (the Company authentication code) to run the requests.

> **Note**: All the other web services, including SOAP and REST (but excluding V1 and V2), will still be accessible by the Company *shortname* and *authcode* and do not have any impact on existing end-users.

Unifier Web Services

Tag Requirements

- All input XML tags must be wrapped within the tags <list_wrapper> </list_wrapper>
- All BP Tag names must start with <_bp> and end with </_bp>
- All BP Line Items must start with <_bp_lineitems> and end with </_bp_lineitems>

Terminology

- **Shells**

  Shells are designed in uDesigner and can represent virtually anything you want. For example, a shell can represent a building, a project, or a concept such as "innovative ideas." Refer to Unifier User Help and Unifier Administration Help for more information.
- **Shell with Cost Code CBS**

  These are shell types for use with the CBS Cost Manager.
- **Shell with Cost Code Generic**

  These are shell types with for use with the Generic Cost Manager.

> **Note:** Oracle develops all new web services as RESTful web services and not SOAP web services. Support for SOAP services is deprecated beginning with version 23.5. Oracle recommends that the new integrations use RESTful web services.

Internationalization and Web Services

About Web Services

New records can be created and line items can be added using Integration through web services. Also, the Schedule Manager integrates with Primavera scheduling software by way of web services.

> **Note**: Integration through web services must be coordinated with an Oracle Primavera representative.

As Project Administrator, you can receive email notification of the successful creation of a shell instance, for shells that are created manually, through web services or a CSV file upload, or through auto-creation. This notification can be set up in email notifications in uDesigner. Also, you can set your **Preferences** to control whether you receive these notifications.

Web Services and Internationalization

The output data generated by web services is always in the source language.

> **Note**: If a record (Example: Business Process) is created by using web services and the Data Definition (DD) label includes a non-ASCII string, then the record creation will fail.

Number formatting of data

When you enter numeric data in XML, you can only use the decimal point (period) and negative sign (dash).

Examples

XML Tag: <Committed_Amount>100.99</Committed_Amount>

XML Tag: <Credited_Amount>-1423.99</Credited_Amount>

Sample JSON request

```
"data": [
        {
            "uuu_quantity": 6000.258,
            "amount": -27600.0,
}
```

When you run a Get call, the input content in the response XML or JSON will be in the language of the source strings.

Get Web Services

You can use the Get Web Services call methods to get various attributes of Shell, CBS, and the list of Business Process records, Shells, and User defined data.

When you run a Get call, the input content in the response XML will be in the language of the source strings.

Number formatting does not apply to the numeric data and the decimal point is a period. The negative numbers are displayed with the minus sign before the numeric data, for example, -12345.99.

> **Note**: Number formatting is not supported for Symbols that are based on a right-to-left language such as official languages of Afghanistan or Hebrew.

General Validation Rules Across all Services

General commenting is only supported by `getCompleteBPRecord` service.

Special characters must be escaped in a valid XML document. The following characters `", ‘, < , >, &` will be escaped to:

- `"`
- `'`

- `<`
- `>`
- `&`

For Web Services (`createBPRecord`, `addBPLineItems`, `updateBPRecord`, `createProject`) the XML is scanned for validity and any errors are reported when found.

A non-required tag like `<hello>hello</hello>` is completely ignored.

Date fields (which are set as Date type) must be in the following format:

- `MM/dd/yyyy`
- `MM-dd-yyyy`
- `MM/dd/yyyy HH:mm:ss`
- `MM-dd-yyyy HH:mm:ss`
- `MM-dd-yyyy HH:mm:ss z (this format accepts timezone)`
- `MM/dd/yyyy HH:mm:ss z (this format accepts timezone)`
- `yyyy/MM/dd HH:mm:ss`
- `yyyy-MM-dd'T'HH:mm:ss`
- `yyyy-MM-dd`

`MM-dd-yyyy hh:mm` is a 24-hour clock. Users should specify time in hours instead of AM/PM notation.

The "z" in `MM/dd/yyyy HH:mm:ss z` signifies timezone.

The system converts user specified time to server time zone and stores in the database.

Tag names are *case sensitive*. For example: <_BP> is not a valid tag.

When designing Business Processes (BPs) that are related to Integration:

- All BPs must have the `record_no` tag in the Upper forms.
- For Cost related BPs, the Amount field must be present in the Line Items.

If the XML has a leading tag `<?xml encoding="iso-8859-1" ?>`, the system supports all characters within this ISO standard.

There are no form-level validations (required field, form level validation rules, and so forth).

There is no auto-populate feature through Integration, if integration interface is not designed for the BP.

General Limitations Across all Services

The `getBPList` service always returns the label data for a Pull Down (drop-down) field.

The `getBPList` service does not return the values.

You cannot send fund related information for Cost Type BPs such as **General Spends** and **Payment Applications**.

Only the following ISO tags are supported as part of Web Services message:

–	NBSP 00 A0 160	¡ 00 A1 161	¢ 00 A2 162	£ 00 A3 163	¤ 00 A4 164	¥ 00 A5 165	¦ 00 A6 166	§ 00 A7 167	¨ 00 A8 168	© 00 A9 169	ª 00 AA 170	« 00 AB 171	¬ 00 AC 172	SHY 00 AD 173	® 00 AE 174	¯ 00 AF 175
B–	° 00 B0 176	± 00 B1 177	² 00 B2 178	³ 00 B3 179	´ 00 B4 180	µ 00 B5 181	¶ 00 B6 182	· 00 B7 183	¸ 00 B8 184	¹ 00 B9 185	º 00 BA 186	» 00 BB 187	¼ 00 BC 188	½ 00 BD 189	¾ 00 BE 190	¿ 00 BF 191
C–	À 00 C0 192	Á 00 C1 193	Â 00 C2 194	Ã 00 C3 195	Ä 00 C4 196	Å 00 C5 197	Æ 00 C6 198	Ç 00 C7 199	È 00 C8 200	É 00 C9 201	Ê 00 CA 202	Ë 00 CB 203	Ì 00 CC 204	Í 00 CD 205	Î 00 CE 206	Ï 00 CF 207
D–	Ð 00 D0 208	Ñ 00 D1 209	Ò 00 D2 210	Ó 00 D3 211	Ô 00 D4 212	Õ 00 D5 213	Ö 00 D6 214	× 00 D7 215	Ø 00 D8 216	Ù 00 D9 217	Ú 00 DA 218	Û 00 DB 219	Ü 00 DC 220	Ý 00 DD 221	Þ 00 DE 222	ß 00 DF 223
E–	à 00 E0 224	á 00 E1 225	â 00 E2 226	ã 00 E3 227	ä 00 E4 228	å 00 E5 229	æ 00 E6 230	ç 00 E7 231	è 00 E8 232	é 00 E9 233	ê 00 EA 234	ë 00 EB 235	ì 00 EC 236	í 00 ED 237	î 00 EE 238	ï 00 EF 239
F–	ð 00F0 240	ñ 00F1 241	ò 00F2 242	ó 00F3 243	ô 00F4 244	õ 00F5 245	ö 00F6 246	÷ 00F7 247	ø 00F8 248	ù 00F9 249	ú 00FA 250	û 00FB 251	ü 00FC 252	ý 00FD 253	þ 00FE 254	ÿ 00FF 255
	—0	—1	—2	—3	—4	—5	—6	—7	—8	—9	—A	—B	—C	—D	—E	—F

Pickers

The following pickers are not supported through Web Services call:

- Commit Short Description
- Asset Picker
- Account Code Picker
- Planning Item Picker
- Resource Picker
- Project Picker
- Activity Picker

- Role Picker
- User Picker

Auto-populate from following attribute forms is not supported:

- Cost Attribute Form
- Fund Attribute Form
- DMS Attribute Form

For all Web Services that allow the addition of attachments, the zip format is supported only if the `iszipfile` tag is set to "yes". The `gzip` files (including the similar file formats) are not supported.

Company Picker

- Both the PUT and GET methods of the REST API support the Company Picker field.
- In the PUT calls, when the tag includes value for a Company Picker field, post validation values are inserted into the system. Similarly the GET calls will retrieve values for the Company Picker fields in the response output. This is applicable to both Upper Form and Detail Form data elements of the Company Picker type.

File Size Limit for REST APIs

Unifier does not support creation / upload of files greater than 1GB through REST API. However, you can also upload the files manually through the Unifier user interface. To upload files successfully through the Unifier user interface, ensure the files are within the file size limit specified in the **Size Limit per File in MB** setting of Unifier. Contact your Company Administrator if you need to modify the file size limit.

Known Issues Across all Services

The `createWBS` service is case insensitive. The service creates a CBS code with A-B-C-D and a-b-c-d.

Any transaction against inactive FBS code will not be rejected.

Auto-population of the Amount field on header form (from Line Items), is only supported if it is included in the form during the form design in uDesigner. Refer to the following guides for more information:

- *Unifier uDesigner User Guide*
- *Unifier General Administration Guide*

- *Unifier Modules Setup Administration Guide*

The shell name can be the same under different parents. In this scenario, if a user tries to create a business process record by passing in a value for a shell picker data element, then the system displays an error (more than one shell with same name).

Business Process (BP) Picker Support

The following Web Services calls will support Business Process Picker:

- `createBPRecord`
- `updateBPRecord`
- `addLineItem`
- `getBPRecord`
- `getCompleteBPRecord`
- `getBPList`

The following validation will be performed when a value is sent for the BP Picker data element:

- System will assume that the value send through the integration message is the value for the Source Element selected as part of reference process definition.
- One, and only one, combination exists.
- If the combination is not valid, or results in two records from reference business process, then the integration will error out.

Similar process will be followed for the Line Item Picker on Detail Form.

Business Process (BP) Record Data Processing Rules

Data Definition tags which have invalid value names will produce an error. If the tag is not sent, the default value 0 (zero) is set if the type of the field is an integer.

Character fields: Check for length.

Amount tag, where specified, checks for valid amount

For Cost type BPs, the CBS code must be there.

For cost BPs, if the status tag is not given, the system scans to check if the BP has one or more status values.

- If it has only one status value, the system will assume it is the default value for this record.
- If the system finds more than one status value, an error is reported.

Note: Error checking is currently supported for Cost BPs only.

Data element of type Pull Down (drop-down) will always take the label value, when a message is sent to the system.

For a BP that is involved in fund information, the FBS code will be validated.

Transactions against an inactive CBS code will be rejected.

If a business process form has a dynamic data set (DDS) definition, then the data combination will be validated while creating, or updating records, through integration.

Creating and Updating Schedule Sheet

A Schedule Sheet under Schedule Manager supports the following objects. For more information, refer to the *Unifier General User Guide*, *Unifier General Administration Guide*, and *Unifier uDesigner User Guide*.

- Activities
- Resource Assignments
- Activity Dependencies (Successors and Predecessors) along with relationship (Start to Finish, Finish to Start, and so on) and lag information.
- Association of an activity with a cost code (CBS Code) from Unifier Cost Manager.

Integration with P6 involves creation, modification and association of these objects automatically through Web Services calls.

As of the current Unifier release, integration with P6 Server supports the following information for each object.

- Activities: All elements including User Defined Fields.
- Resource Assignments: All elements including User Defined Fields and Unit of Measure
- Activity Dependencies: Based on Activity Dependencies option
- Association with Cost Codes: Unifier uses special logic as part of integration to build CBS Code to match with Unifier CBS Code or Cost Codes under Cost Manager. See ***Associate CBS Codes with Activities*** (on page 33).

To create and update these objects as part of Integration, the user must first create a data mapping relationship between data elements of Unifier and P6. The following section explains Data Mapping concepts and how to create one.

Apart from data mapping, Unifier should also know how to identify Activities and Resources that are coming from Primavera Project. This is to allow the system to support the update web service method. The application currently supports two ways to identify an Activity and one way to identify a Resource.

An Activity can be identified by a GUID. Each activity in Primavera Project has a GUID. This GUID will be stored when an activity is created in Unifier and can be used later as part of update process.

The second way to identify an activity is through Activity ID. Each activity in Primavera Project has an Activity ID. This ID will be stored when an activity is created and will be used later as part of update process.

Resources are identified by their name. Each resource in Primavera Project has a name and this will be stored when a resource assignment is created in Unifier.

Data Mapping

To create and update these objects as part of Integration, the user must first create a data mapping relationship between Unifier and P6 data elements. The user can create one or more data mapping for each Schedule Sheet.

To define data mapping:

1) Navigate to your Project/Shell and open a schedule sheet.
2) From the menu bar, choose **File** > **Data Mapping**. The Data Mappings window opens.

   The Data Mappings window lists any mappings that you have created, and their default statuses. At run time, the system uses the mapping status and prevents the Select Default Mapping window from opening.
3) Click the **Add** button. The Data Mapping window opens.
4) On the **General** tab, enter the name and the description for the data mapping and click **Apply** to save changes and keep the window open, or click **OK** to save changes and close the window.
5) On the **Activity** tab, you can map Unifier schedule sheet columns to external CSV headers and XML tags for the import or export of activity information. Choose data elements from Activity and Resource Attribute forms. See the **Activity Tab Fields** table for details.
6) On the **Resources** tab, you can map resource information through XML integration. Enter the header in the XML element that corresponds to the column. Mapping resources is mandatory only if you select Import Resource Assignments on the Options tab.
7) On the **Options** tab you can configure XML options that the system uses when importing data. See the **Options Tab Fields** table for details.
8) Click **OK**.

One of the data mappings can be selected as default.This defaulting concept will be used while processing a web services call. How to use a data mapping and where default data mapping is used is explained in Web Service Methods section.

Data mapping can be marked to override existing data or merge existing data. Based on the web services call and business need appropriate option must be selected.

Activity Tab Fields

Data format	Data mapping requirements
Column	Select the data elements you want to import. Minimum required fields for XML import are Activity ID, Activity Name, Start Date, Finish Date, and Duration.
CSV Header	Enter the CSV header from the external source.
XML Element	Enter the corresponding XML from the external source

Options Tab Fields

In this field:	Do this:
XML Import	Define options for importing XML activity schedules into Unifier. Mapping options are the same for Primavera XML and Microsoft Project XML.
Options	You can either retain existing schedule information in Unifier, or overwrite it complete upon importing an external XML file. 1. Merge into existing schedule. With this selection, you have a sub-option to Delete Activities removed from the source schedule. 2. Overwrite existing schedule replaces the existing schedule.
Data Elements	Select the appropriate check boxes if you want to: - Import activities (rows) - Include dependencies - Assign resources - Assign CBS codes

In this field:	Do this:
Data Elements *(continued)*	1. Activity Dependencies: Select this check box to retain activities from the XML source file. 2. Activity Calendar: Select this check box to retain the activity calendar from the XML source file. If imported, the activity calendar will trigger the recalculation of activity dates as needed, and will override any existing activity calendar association. If a calendar is not imported, the activity will use the existing calendar defined in the Schedule Sheet properties.
Data Elements *(continued)*	There must be a calendar in the system with the same name as the calendar in the import file. (For more information, see **Creating Multiple Calendars** in the *Unifier Modules Setup Administration Guide*.) 1. Resource Assignments: Select this check box to retain the resource assignments from the XML source file. If you want to import resources, define the resource types for the data definition SYS Resource Type. For Microsoft Project files, use standard resource types: Work, Material, and Cost. Upon import, these resource types will soft book. 2. CBS Codes: Select this check box to import CBS codes 3. Number of Levels: If you choose to import Primavera CBS codes, you can specify the segments that should be considered in the Primavera XML file for the codes (from 1 to 9) and the CBS code suffix mask. For more information, see **CBS code options for Primavera XML and Microsoft Project XML** in the *Unifier Modules Setup Administration Guide*. 4. Suffix Mask: Does not apply for Microsoft Project XML files, and this value is ignored when files of this type are imported. You can use a constant or a data element value in the Suffix Mask.

Associate CBS Codes with Activities

In a Project, the activities are grouped together by CBS Codes.

The following shows a sample project data:

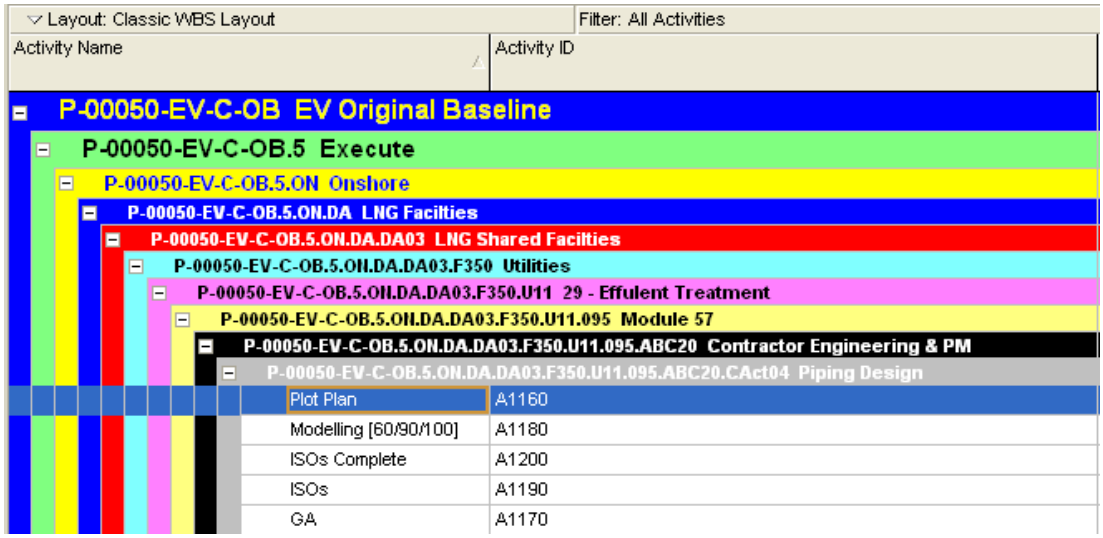

In this sample, the activities A1160, A1180 are under a CBS Code built by the following sequence of codes:

- `P -00050-EV-C-OB.5 Execute`
- `P -00050-EV-C-OB.5.ON Onshore`
- `P -00050-EV-C-OB.5.ON.DA LNG Facilities`
- `P -00050-EV-C-OB.5.ON.DA.DA03 LNG Shared Facilities`
- and so forth ...

In this sample, activity A1160 (Plot Plan) is associated with CBS Code: `P -00050-EV-C-OB.5.ON.DA.DA03.F350.U11.095.ABC20.CAct04`. The XML file that is generated by Unifier does not include the entire string of CBS Code with all segments. The structure of the XML file is built based on the Parent/Child CBS segments. As a result, activity A1160 (Plot Plan) has reference to its immediate parent segment, which in this example is only `CAct04`. The `CAct04` segment will have a reference to `ABC20` segment, the `ABC20` has reference to `095` and so on.

To associate an activity with a CBS Code, the system will go through this hierarchical structure of CBS segments to build the final CBS Code. Unifier will perform this function when CBS Code import option is checked on the Options tab of Data Mapping. The CBS Code string generated will then be validated with leaf level CBS Codes created under Cost Manager. If the CBS Code is available, then the activity will be associated with the CBS Code. If the CBS Code is not available, then the import process will fail.

Additional options are available to create entire string of CBS Code. These options can be used to address any structural differences between the way CBS Codes are built in Unifier Cost Manager and CBS Codes in Primavera Project.

- **Levels**: User can choose number of CBS segments that should be considered while processing a Primavera XML file. For example, if user enters 8 then last segment CAct04 will not be considered while building CBS Code.
- **Suffix Mask**: User can optionally enter a suffix mask, which will be added to the end of CBS Codes built based on Primavera XML file. Users can either enter a constant value of select a data element from activity attribute form.

> **Note**: With the help of this data element being selected as suffix, it is possible to build CBS Code and assign it to an activity based on attributes of activities coming from P6 instead of the CBS Code hierarchy of the activities.

Simple Object Access Protocol (SOAP) Web Services

Figure 1: Support for SOAP is deprecated starting with Unifier 23.10.

The following topics explain the Unifier SOAP web services.

Note: Oracle develops all new web services as RESTful web services and not SOAP web services. Support for SOAP services is deprecated beginning with version 23.5. Oracle recommends that the new integrations use RESTful web services.

In This Section

Resource Manager Methods....35
Space Manager Methods....40
Planning Manager Methods....46
User Administration Methods....48
Schedule of Values (SOV) Methods....56
Exchange Rates Methods....57
Configurable Manager Methods....60
Shell Methods....63
Schedule Manager Methods....72
User Defined Reports (UDR) Methods....91
Cost Sheet Methods....93
Business Process (BP) Methods....98
CBS Code Methods....143

Resource Manager Methods

Figure 2: Support for SOAP is deprecated starting with Unifier 23.10.

Create and/or update Role

Figure 3: Support for SOAP is deprecated starting with Unifier 23.10.

Description

This method creates (and updates) Resource Manager Roles.

Support

This method can only support creating and updating Roles at the company level.

Installation: ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	No

Prototype

public XMLObject createUpdateRole (String shortname, String authcode, String rolesXML);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
authcode	authentication key for the company, in text string
rolesXML	Information of the role(s) that must be created and/or updated

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

createUpdateRole("acme", "acme_authcode", "XML")

Additional Information

_role tag can be repeated to create multiple roles.

Role name will be used as a unique identifier to update existing role information.

Value of <role_currency> element should be valid. For a list of valid country names, see Currency.

Get Role List

Figure 4: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method gets a list of roles created at company level.

Support

This method is only supported at company level.

Installation: ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	No

Prototype

public XMLObject getRoleList (String shortname, String authcode, String filterCondition);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
authcode	authentication key for the company, in text string
filtercondition	Condition based on which list of roles can be filtered

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

getRoleList("acme", "acme_authcode",uuu_role_status=Active)

Additional Information

Only one filter condition can be provided at a time.

Only operator available for filter condition will be "=".

Example:

If user wants to get a list of roles with status Active then filterCondition should be <filterCondition>uuu_role_status = Active</filterCondition>

If user wants to get a role with name "Architect" then filterCondition should be <filterCondition>uuu_role_name = Architect</filterCondition>.

Create and/or update Resource

Figure 5: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method creates (and updates) Resource Manager Resources.

Support

This method can only support creating and updating Resources at the company level.

Installation: ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	No

Prototype

public XMLObject createUpdateResource (String shortname, String authcode, String resourceXML);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
authcode	authentication key for the company, in text string
resourceXML	Information of the resource(s) that will be created and/or updated

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

createUpdateResource("acme", "acme_authcode", XML)

Additional Information

_resource tag can repeat to create multiple resources.

Get Resource List

Figure 6: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method gets a list of resources created at company level.

Support

This method is only supported at company level.

Installation: ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	No

Prototype

public XMLObject getResourceList(String shortname, String authcode, String filterCondition);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
authcode	authentication key for the company, in text string
filtercondition	Condition based on which list of roles can be filtered

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

getRoleList("acme", "acme_authcode",uuu_resc_status=Active)

Additional Information

Only one filter condition can be provided at a time.

Only operator available for filter condition will be "=".

Example:

If user wants to get a list of resources with status Active then filterCondition should be <filterCondition>uuu_resc_status = Active</filterCondition>

Space Manager Methods

Figure 7: Support for SOAP is deprecated starting with Unifier 23.10.

Create Level

Figure 8: Support for SOAP is deprecated starting with Unifier 23.10.

Description

This method creates level record in the system. This works only for project or shell level.

Support

Installation: ASP and Self host

Level	Yes or No
Company Level	No
Project and Shell Level	Yes

Prototype

public XMLObject createLevel (String shortname, String authcode, string projectNumber, String levelXML);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
authcode	authentication key for the company, in text string
projectNumber	Identifier of the project or shell.
levelXML	XML that contains information related to level that is getting created

Return Value

XMLObject (XMLObject is described at the beginning of this document)

Sample Method

createLevel ("acme", "acme_authcode", "proj-01", levelXML) will return the XML Record of the Level created.

Additional Information

Multiple levels can be created by repeating <_level> for each level record.

This service can be used for both Shells of cost code type CBS and Generic.

XML tags under _level element are based on the integration interface definition of level form.

Update Level

Figure 9: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method updates level record in the system. This works only for project or shell level.

Support

Installation: ASP and Self host

Level	Yes or No
Company Level	No
Project and Shell Level	Yes

Prototype

public XMLObject updateLevel (String shortname, String authcode, string projectNumber, String levelXML);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
authcode	authentication key for the company, in text string
projectNumber	Identifier of the project or shell.

Parameter	Description
levelXML	XML that contains information related to level that is getting created

Return Value

XMLObject (XMLObject is described at the beginning of this document)

Sample Method

updateLevel ("acme", "acme_authcode", "proj-01", levelXML) will return the XML Record of the Level updated.

Additional Information

Multiple levels can be updated by repeating <_level> for each level record.

This service can be used for both Shells of cost code type CBS and Generic.

XML tags under _level element are based on the integration interface definition of level form.

To update a level record, value under <uuu_sp_level_name> will be used as identifier.

Get Level List

Figure 10: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method will get a list of level record from the system. This works only for project or shell level.

Support

Installation: ASP and Self host

Level	Yes or No
Company Level	No
Project and Shell Level	Yes

Prototype

public XMLObject getLevelList(String shortname, String authcode, string projectNumber);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
authcode	authentication key for the company, in text string
projectNumber	Identifier of the project or shell in Unifier.

Return Value

XMLObject (XMLObject is described at the beginning of this document)

Sample Method

getLevelList ("acme", "acme_authcode", "proj-01") will return the XML Record of the Level records.

Additional Information

XML tags under _level will be based on integration interface definition of level form.

This service can be used for both Shells of cost code type CBS and Generic.

Create Space

Figure 11: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method creates space record of a space type in the system. This works only for project or shell level.

Support

Installation: ASP and Self host

Level	Yes or No
Company Level	No
Project and Shell Level	Yes

Prototype

public XMLObject createSpace (String shortname, String authcode, string projectNumber, String spacetype, String spaceXML);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
authcode	authentication key for the company, in text string
projectNumber	Identifier of the project or shell.
spacetype	Identifier of the space type
spaceXML	XML that contains information related to space that is getting created

Return Value

XMLObject (XMLObject is described at the beginning of this document)

Sample Method

createSpace ("acme", "acme_authcode", "proj-01", "Useable Spaces", spaceXML) will return the XML Record of the Level created.

Additional Information

Multiple spaces can be created by repeating <_space> for each space record.

This service can be used for both Shells of cost code type CBS and Generic.

XML tags under _space element are based on the integration interface definition of space form.

uuu_sp_level_picker element value will be used to identify the level under which the space record should be created.

Update Space

Figure 12: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method will update space record in the system. This works only for project or shell level.

Support

Installation: ASP and Self host

Level	Yes or No
Company Level	No
Project and Shell Level	Yes

Prototype

public XMLObject updateSpace(String shortname, String authcode, string projectNumber, String spacetype, String spaceXML);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
authcode	authentication key for the company, in text string
projectNumber	Identifier of the project or shell.
spacetype	Identifier of the space type
spaceXML	XML that contains information related to space that is getting updated

Return Value

XMLObject (XMLObject is described at the beginning of this document)

Sample Method

updateSpace ("acme", "acme_authcode", "proj-01","Useable Spaces", spaceXML) will return the XML Record of the Level updated.

Additional Information

Multiple spaces can be updated by repeating <_level> for each space record.

This service can be used for both Shells of cost code type CBS and Generic.

XML tags under _space element are based on the integration interface definition of space form.

To update a space record in Unifier, value under <uuu_sp_level_picker> and data element based on data definition Sys Space Name will be used as identifier.

Get Space List

Figure 13: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method will get a list of space record from the system. This works only for project or shell level.

Support

Installation: ASP and Self host

Level	Yes or No
Company Level	No
Project and Shell Level	Yes

Prototype

public XMLObject getSpaceList(String shortname, String authcode, string projectNumber);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
authcode	authentication key for the company, in text string
projectNumber	Identifier of the project or shell.

Return Value

XMLObject (XMLObject is described at the beginning of this document)

Sample Method

getSpaceList ("acme", "acme_authcode", "proj-01") will return the XML Record of the Level records.

Additional Information

XML tags under _space will be based on integration interface definition of level form.

This service can be used for both Shells of cost code type CBS and Generic.

Planning Manager Methods

Figure 14: Support for SOAP is deprecated starting with Unifier 23.10.

Get Planning Item Record

Figure 15: Support for SOAP is deprecated starting with Unifier 23.10.

Description

This method gets a specific Planning Item record in the system. This works for both company level and project or shell level Planning Items.

Support

This process supports all type of Planning Items.

Installation: ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	Yes

Prototype

public XMLObject getPlanningItem (String shortname, String authcode, string projectNumber, String BPName, String planning Item);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
authcode	authentication key for the company, in text string
projectNumber	Identifier of the project or shell. Pass null for Company Level Planning Items
BPName	identifier of the planning item type, for example: Capital Projects
planningItem	identifier of the planning item example: Tower

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

getPlanningItem("acme", "acme_authcode", "proj-01", "Capital Projects","Tower") will return the XML Record of the Planning Item.

Additional Information

If the planningItem is left blank or invalid planningItem then the method will returns the Planning Item's skeletal XML.

To get company level Planning Item record information, send null for projectNumber parameter. If you send a project number for a Planning Item type that is at Company level then you will get an error that Planning Item type is not correct.

This service can be used for Projects/Shells of cost code type CBS and Generic.

User Administration Methods

Figure 16: Support for SOAP is deprecated starting with Unifier 23.10.

Create User

Figure 17: Support for SOAP is deprecated starting with Unifier 23.10.

Description

This public method will allow users to create one or more company users.

Support

Installation: ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	No

Prototype

public XMLObject createUser(String shortname, String authcode, String copyFromUserPreferenceTemplate, String userXML);

Parameters

Parameter	Description
Shortname	Identifier of the company, company's short name
Authcode	Authentication key for the company, in text string
copyFromUserPreferenceTemplate	Name of the template from which user preference should be copied over when new user is created

Parameter	Description
userXML	▸ If the User Attribute Form is defined, it should be based on the integration interface definition of the user attribute form in udesigner. ▸ If the User Attribute Form is not defined, the element of userXML will be from the table in the following "userXML Elements" section, below.

userXML Elements (When User Attribute Form is not Defined)

Tag Name	Required	Description	Valid values
<username>	Yes	User name that is going to be used by user to sign in to Unifier.	
<password>	Yes	User's password	
<firstname>	No	First name of the user.	
<lastname>	No	Last name of the user.	
<title>	No	Title information	
<email>	No	Email of the user	
<workphone>	No	Work phone number of the user	
<homephone>	No	Home phone number of the user	
<fax>	No	Fax number of the user	
<cellphone>	No	Cell phone number of the user	
<pager>	No	Pager number of the user	
<status>	No	Status of the newly created user (Active, Inactive, On-Hold)	Active: 1 Inactive: 0 On-Hold: 2

Tag Name	Required	Description	Valid values
<timezone>	No	Time zone of the user.	See Time Zone. You have to send the data from value column, for example, for time zone GMT -11:00, Samoa Standard Time (Samoa) send 10.
<dateformat>	No	User preference date format.	See Date Format. You have to send the data from value column, for example for MM/DD/YYYY HH:MM AM send 0 (zero).
<usertype>	No	Defines the user type, based on license terms.	0 for Standard User 1 for Portal User

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

createUser("acme", "acme_authcode", "User Pref Temp 1", "<user information>")

Additional Information

If the user preference template is provided then the user preference will be set based on the user preference template on the newly created company user.

'_user' will be the base tag which can be repeated with the data in order to create multiple company users.

The Web Services call for user administration includes a XML tag to support the Proxy login setup. The Data Element (DE) for the XML tag is: "`uuu_user_proxy_config`."

This is not a required field, so the default value remains unchecked.

Users can be created using the CreateOject WS method, and the XML tag is: "`allowproxy`."

To map the values for check box:

- If `uuu_user_proxy_config` or `allowproxy` is set to Yes, the “Do not allow Proxies” check box in the Proxy tab should be deselected.
- If `uuu_user_proxy_config` or `allowproxy` is set to No, the “Do not allow Proxies” check box in the Proxy tab should be selected.

Update User

Figure 18: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This public method will allow users to update one or more company users.

Support

Installation: ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	No

Prototype

public XMLObject updateUser(String shortname, String authcode, String userXML);

Parameters

Parameter	Description
Shortname	identifier of the company, company's short name
Authcode	authentication key for the company, in text string
userXML	▸ If the User Attribute Form is defined, it should be based on the integration interface definition of the user attribute form in udesigner. ▸ If the User Attribute Form is not defined, the element of userXML will be from the userXML Elements table in the "Create User" section above.

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

updateUser("acme", "acme_authcode", "<user information>")

Additional Information

'_user' will be the base tag which can be repeated with the data in order to update multiple company users.

The unique identifier will be the user name and based on the matching user name, the passed on fields should be updated.

The Web Services call for user administration includes a XML tag to support the Proxy login setup. The Data Element (DE) for the XML tag is: "`uuu_user_proxy_config`."

This is not a required field, so the default value remains unchecked.

Users can be created using the CreateOject WS method, and the XML tag is: "`allowproxy`."

To map the values for check box:

- If `uuu_user_proxy_config` or `allowproxy` is set to Yes, the “Do not allow Proxies” check box in the Proxy tab should be deselected.
- If `uuu_user_proxy_config` or `allowproxy` is set to No, the “Do not allow Proxies” check box in the Proxy tab should be selected.

Get User List

Figure 19: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This public method will allow users to get a list of company users.

Support

Installation: ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	No

Prototype

public XMLObject getUserList(String shortname, String authcode, String filterCondition);

Parameters

Parameter	Description
Shortname	identifier of the company, company's short name
Authcode	authentication key for the company, in text string

Parameter	Description
filterCondition	Information or condition to filter users list

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

If User Attribute Form is defined:

```
getUserList("acme", "acme_authcode", "uuu_user_status=0 or uuu_user_status=1 or uuu_user_status=2");
```

If User Attribute Form is not defined:

```
getUserList("acme", "acme_authcode", " status=0 or status=1 or status=2");
```

Additional Information

This method will allow users to get a list of company users based on the matching filter condition on either Username or First Name or Last Name or Email or Status. The XML element for these fields will be based on whether or not the User Attribute Form has been defined, as shown below:

Field	When User Attribute Form is Defined	When User Attribute Form is not Defined
Username	uuu_user_loginname	username
First Name	uuu_user_firstname	firstname
Lastname	uuu_user_lastname	lastname
Email	uuu_user_email	email
Status	uuu_user_status	status

Only one filter condition can be provided at a time using the "=" operator.

Method will return the list of Users with matching conditions.

Update User Group Membership

Figure 20: Support for SOAP is deprecated starting with Unifier 23.10.

Description

This public method will allow users to update one or more company user's membership to company level groups.

Note: Although the system audits the addition or removal of users to or from a shell, it does not audit group membership. Because of this, changes to group membership are not reflected in the Group Audit Log.

Support

Installation: ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	No

Prototype

public XMLObject updateUserGroupMembership(String shortname, String authcode, String membershipXML);

Parameters

Parameter	Description
Shortname	identifier of the company, company's short name
Authcode	authentication key for the company, in text string
membershipXML	Information of the user(s) that must be added and/or removed from company level groups

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

updateUserGroupMembership("acme", "acme_authcode", "<user information>")

Additional Information

'_user' will be the base tag which can be repeated with the data in order to update multiple company users' group membership.

The unique identifier will be the user name and based on the matching user name, the passed on fields should be updated.

Update User Shell Membership

Figure 21: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This public method adds users to shell membership, updates user status in shell membership and adds/removes users to/from groups at shell level.

> **Note:** Although the system audits the addition or removal of users to or from a shell, it does not audit group membership. Because of this, changes to group membership are not reflected in the Group Audit Log.

Support

Installation: ASP and Self host

Level	Yes or No
Company Level	No
Project and Shell Level	Yes

Prototype

public XMLObject updateUserShellMembership(String shortname, String authcode, String projectNumber, String membershipXML);

Parameters

Parameter	Description
Shortname	Identifier of the company, company's short name
Authcode	Authentication key for the company, in text string
projectNumber	Identifier of project or shell in Unifier
membershipXML	Information of the user(s) that must be added and/or removed from shell groups including activation / inactivation of user under a project or shell

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

updateUserShellMembership("acme", "acme_authcode", "Proj-0001", "<user information>")

Additional Information

The project/shell number is mandatory

'_ shelluser' will be the base tag which can be repeated with the data in order to update multiple company/shell users and their group membership.

The unique identifier will be the user name and based on the matching user name, the passed on fields should be updated.

'group_add', 'group_remove' and 'status' are optional tags.

Status can be either 'Active', 'Inactive', or empty.

Empty status or no status should be interpreted as 'Active' status.

Prerequisite for this web service to successfully add users to the shell membership:

Add the company user to the shell membership only if the user exists in company users log at the company level and is with active or on-hold status.

Add the partner user to the shell membership if the user exists in partner user log at the company level and is with active or on-hold status. If the partner user does not exist at the company level, the web service will add the user to both company level partner user log and to the shell membership after checking for license restrictions.

Schedule of Values (SOV) Methods

Figure 22: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Get SOV

Figure 23: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method will get schedule of values information of a commitment.

Support

Installation: ASP and Self host

Level	Yes or No
Company Level	No

Level	Yes or No
Project and Shell Level	Yes

Prototype

public XMLObject getSOV(String shortname, String authcode, String projectNumber, String BPName, String recordNumber);

Parameters

Parameter	Description
Shortname	Identifier of the company, company's short name
Authcode	Authentication key for the company, in text string
projectNumber	Identifier of a project or shell.
BPName	Identifier of the base commits business process, for example: Contracts. This is case sensitive, and should be the name as given in uDesigner
RecordNumber	The record number is base commit record number that the SOV is associated to.

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

getSOV("acme", "acme_authcode", "PRJ-0001", "Contracts", "CON-0001")

Additional Information

getSOV can be used to get the SOV for General Spends and Payment Applications.

Tags under <SOV_header> parent tag will change if the SOV is group by commit codes or individual line items.

Exchange Rates Methods

Figure 24: Support for SOAP is deprecated starting with Unifier 23.10.

Update Exchange Rates

Figure 25: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method adds and updates exchange rates defined at company level.

Support

This applies to exchange rates at company level only.

Installation: ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	No

Prototype

public XMLObject updateExchangeRates(String shortname, String authcode, String rates;

Parameters

Parameter	Description
Shortname	identifier of the company, company's short name
Authcode	authentication key for the company, in text string
Rates	Exchange rates of one or more currency codes with respect to company base currency.

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

updateExchangeRates ("acme", "acme_authcode", "XML")

Additional Information

User can add rates using Web Services call.

updateExchangeRates will always create new exchange rate record and will mark it "Active."

New currency codes can be added as part of this call.

If an invalid currency code is provided as part of currency code then that code will be ignored and other codes will be processed.

If the call is successful, new record with rates will be added.

Currency name is not mandatory. For valid currency codes, see Currencies and Codes.

Get Exchange Rates

Figure 26: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method will get exchange rates from the latest exchange rates record.

Support

Installation: ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	No

Prototype

public XMLObject getExchangeRates(String shortname, String authcode);

Parameters

Parameter	Description
Shortname	identifier of the company, company's short name
Authcode	authentication key for the company, in text string
Rates	Exchange rates of one or more currency codes with respect to company base currency.

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

getExchangeRates("acme", "acme_authcode", rates)

Configurable Manager Methods

Figure 27: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Create Records in Code and Records-based Generic Manager

Figure 28: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method creates records under a generic manager class. This applies only to code-& records based generic managers.

Support

This applies to code-& records based generic managers at Company and Project or Shell levels.

Installation: ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	Yes

Prototype

public XMLObject createConfigurableModuleRecord(String shortname, String authcode, String projectNumber, String CMCode, String ClassName, String copyFromRecord, String recordXML);

Parameters

Parameter	Description
Shortname	identifier of the company, company's short name
Authcode	authentication key for the company, in text string
projectNumber	Identifier of a project or shell. Value can be left empty/ignored if specified CM is a company level manager.
CMCode	Identify CM (‘CM1', ‘CM2', …)

Parameter	Description
ClassName	Name of the class (Buildings, Electrical, IT Equipments and so on)
copyFromRecord	Can be left empty if not copying from another record
recordXML	content of the record that needs to be created. This is based on Integration interface design for class in uDesigner.

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

createConfigurableModuleRecord ("acme", "acme_authcode", "Buildings","CM5", "Electrical","", "XML")

Additional Information

Same logic while creating new records from UI will be used while creating a record from integration. This includes validation logic, setting status, and so on.

All validations on detail form including required fields and user defined form validations will be retained while creating new records through web services.

After a record is created, detail form will be in Finish Editing mode. Data will be rolled up to the corresponding manager sheet.

Data Element which is based on data definition as follows, SYS Numeric Logical Datasource, SYS Date Logical Datasource, SYS Business Process Datasource and SYS Project Cost Datasource will not be available as part of Integration.

This service can be used for Projects/Shells of cost code type CBS and Generic.

Update Records in Code and Records-based Generic Manager

Figure 29: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method updates records under a generic manager class. This applies only to code-& records based generic managers.

Support

This applies to code-& records based generic managers at Company and Project or Shell levels.

Installation: ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	Yes

Prototype

public XMLObject updateConfigurableModuleRecord(String shortname, String authcode, String projectNumber, String CMCode, String ClassName, String copyFromRecord, String recordXML);

Parameters

Parameter	Description
Shortname	identifier of the company, company's short name
Authcode	authentication key for the company, in text string
projectNumber	Identifier of a project or shell. Value can be left empty/ignored if specified CM is a company level manager.
CMCode	Identify CM (‘CM1', ‘CM2', …)
ClassName	Name of the class (Buildings, IT Equipments, and so on)
copyFromRecord	Can be left empty if not copying from another record
recordXML	Content of the record that needs to be created. This is based on Integration interface design for class in uDesigner.

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

updateConfigurableModuleRecord ("acme", "acme_authcode", "Buildings","CM5", "Electrical","", "XML")

Additional Information

Same logic while creating new records from UI will be used while creating a record from integration. This includes validation logic, setting status, and so on.

All validations on detail form including required fields and user defined form validations will be retained while creating new records through web services.

After a record is created, detail form will be in Finish Editing mode. Data will be rolled up to the corresponding manager sheet.

Data Element which is based on data definition as follows, SYS Numeric Logical Datasource, SYS Date Logical Datasource, SYS Business Process Datasource and SYS Project Cost Datasource will not be available as part of Integration.

This service can be used for Projects/Shells of cost code type CBS and Generic.

Shell Methods

Figure 30: Support for SOAP is deprecated starting with Unifier 23.10.

Create Shell

Figure 31: Support for SOAP is deprecated starting with Unifier 23.10.

Description

This method will allow users to create shell instances under a shell type. User can create more than one shell at a time.

Support

This method only supports creation of shells under a company and is not associated with any project.

Installation: ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	No

Prototype

public XMLObject createShell(String shortname, String authcode, String copyFromShellTemplate, String shellXML);

Parameters

Parameter	Description
shortname	Identifier of the company, company's short name

Parameter	Description
authcode	Authentication code for the company, in text string
copyFromShellTemplate	This will be number of another shell instance or shell template. Based on shell template, shell type will be determined to create new shell
shellXML	This will be based on Shell integration interface definition. Without this definition defined user will not be allowed to create a shell instance

shellXML Elements

Tag Name	Required	Description	Valid values
<_shell>	Yes	Base tag for new shell data. This tag can be repeated to create more than one shell instance	NA
<_moduleoptions>	No	Base tag for options.	This tag is optional. If this tag is not provided, Unifier will create shell by copying user / groups from template or shell provided under copyFromShellTemplate.

Tag Name	Required	Description	Valid values
<copyModules>	No	Option to either copy modules or not.	This tag can only go as a child element under <_moduleOptions> tag. This tag is identify either to create a new shell by copying all modules including user / group or just creates a new shell by copying user / group from template provided under copyFromShellTemplate. Only valid values are Yes / No. Yes means copy all modules including user / groups. No means copy only user / groups. If tag is not provided or value is empty then default behavior will be to No.

Tag Name	Required	Description	Valid values
<defaultCurrency>	No	Option to specify the currency code for the shell	A new child element of <defaultCurrency> will be available within the <_moduleoptions> tag. Valid values for the <defaultCurrency> tag are the code for the currency rather than the names. For example, USD is valid, United States Dollars is not. If the code is not a valid code then the web service will fail. If the tag is present and the value is empty then template currency will be selected.

The Document Manager attribute that is used to define the Document Management Structure (DMS) originates from the shell template that was used to create the shell using "copyFromShellTemplate" parameter. If the shell template does not contain any references to the DM attribute form, the shell that was created by using such template will have the system-defined attribute form in order to define the DMS.

Return Value

See ***Appendix A: Return Values*** (on page 831).

> **Note**: The message will contain new Shell Number and Shell Name that is created within the system.

Sample Method

createShell("acme", "acme_authcode", "Proj-0001","<XML Content>");

Note: If you do not provide values for elements that are not required then the values from template will be used to create new shell.

Additional Information

User will be allowed to create shells of type CBS and Generic. For more information about types of shells, refer to the *Unifier uDesigner User Guide*.

User will be able to pass in a value for Location Picker element while creating shell instance.

All other validation while creating shell instance manually will be honored through Integration as follows, required fields, duplicate shell id, and so on.

Users will be allowed to create multiple shells using this service call. If creation of one shell fails then entire transaction will be rolled back.

All shells created will be based on same template

Shell currency will be based on the template.

Update Shell

Figure 32: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method will allow users to update shell instances. User can update more than one shell at a time.

The user will be able to pass in a value for Location Picker element (`Datadefinition : uuu_location`) while updating the shell instance.

Location picker value will be validated.

Support

This method only supports update of shells under a company and is not associated with any project.

Installation: ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	No

Prototype

public XMLObject updateShell (String shortname, String authcode, String shellType, String shellXML);

Parameters

Parameter	Description
shortname	Identifier of the company, company's short name
authcode	Authentication code for the company, in text string
shellType	To identify type of the shell that is getting updated, for example, Building, Projects, Capital Projects, Properties, and so on
shellXML	This will be based on Shell integration interface definition. Without this definition defined user will not be allowed to update a shell instance

shellXML Elements

Tag Name	Required	Description	Valid values
<_shell>	Yes	Base tag for new shell data. This tag can be repeated to create more than one shell instance	

Return Value

See ***Appendix A: Return Values*** (on page 831). Message will contain Shell Number and Shell Name that is updated within Unifier.

Sample Method

updateShell("acme", "acme_authcode", "Buildings","<XML Content>");

Additional Information

Shell that will be updated will be based on shell type and shell number provided as part of XML content.

User will be allowed to update both CBS and Generic shells. For more information about shells, refer to the *Unifier uDesigner User Guide*.

User will be able to pass in a value for Location Picker element while updating shell instance. Location picker value will be validated.

All other validation while creating shell instance manually will be retained through Integration as follows, required fields, duplicate shell id, and so on.

This method will allow user to update one more shell of same type at a time.

Get Shell List

Figure 33: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method will allow users to get a list of shell instances. User can get information of more than one shell at a time.

Support

Installation: ASP and Self host

Level	Yes or No
Company Level	Yes
Project or Shell Level	No

Prototype

public XMLObject getShellList(String shortname, String authcode, String shellType, String filterCondition);

Parameters

Parameter	Description
shortname	Identifier of the company, company's short name
authcode	Authentication code for the company, in text string
shellType	To identify type of the shell that is getting updated, for example, Building, Projects, Capital Projects, Properties, and so on
filtercondition	This will allow user to filter list of shells returned. Following is list of elements that use can filter shell list on <shell number>: data element used to capture shell number <shell name>: data element used to capture shell name Status (uuu_shell_status): Status of the shell

Return Value

See ***Appendix A: Return Values*** (on page 831).

> **Note**: The message will return list of shells based on filer condition.

Sample Method

getShellList("acme", "acme_authcode", "Buildings", uuu_shell_status=Active);

Additional Information

Only one filter condition can be provided at a time.

Only operator available for filter condition will be "=".

Example:

If user wants to get a list of shells with status Active then filterCondition should be <filterCondition>uuu_shell_status = Active</filterCondition>

If user wants to get a shell with name Building 101 then filterCondition should be <filterCondition>my_building_name = Building 101</filterCondition). Assuming that my_building_name is the data element used to capture name of the shell using SYS Shell Name.

Get Project/Shell List

Figure 34: Support for SOAP is deprecated starting with Unifier 23.10.

Description

This method will allow users to get a list of project and shell instances. User can get information of more than one project and shell at a time.

Support

Installation: ASP and Self host

Level	Yes or No
Company Level	Yes
Project or Shell Level	No

Prototype

public XMLObject getProjectShellList(String shortname, String authcode, String options);

Parameters

Parameter	Description
Shortname	Identifier of the company, company's short name
Authcode	Authentication code for the company, in text string

Options	This parameter allows the user to filter the list based on the following:
	▸ <status>: select a status of Active, Inactive, On-Hold or View-Only. If no status is provided then all projects and shells are returned.
	▸ <type>: select the type to be returned. Value can be project, CBS_shell or generic_shell. If no type if provided then all projects and shells will be returned.
	▸ <filter_condition>: filter the results based on either the projectnumber or projectname.
	Example:
	`<gen:options>`
	`<![CDATA[`
	`<options>`
	`<type>CBS_shell</type>`
	`<status>Active</status>`
	`<filter_condition>projectname=Building 101</filter_condition>`
	`</options>`
	`]]>`
	`</gen:options>`

Return Value

See ***Appendix A: Return Values*** (on page 831).

Note: The message will return list of project and shells based on filter conditions.

Sample Method

getShellList("acme", "acme_authcode", type=CBS_shell);

Schedule Manager Methods

Figure 35: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Create Schedule Sheet Activities from Primavera P5 and P6 XML

Figure 36: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method creates activities into an existing Unifier project level or shell level (cost code type CBS) schedule sheet, using the default data mapping.

Support

This method can only support creation of activities in project level or shell level (cost code type CBS) schedule sheets.

Installation: ASP and Self host

Level	Yes or No
Company Level	No
Project and Shell Level	Yes

Prototype

public XMLObject createScheduleActivities(String shortname, String authcode, String projectNumber, String scheduleSheet, String scheduleXML);

Parameters

Parameter	Description
Shortname	Identifier of the company, company's short name

Parameter	Description
authcode	Authentication code for the company, in text string
projectNumber	Identifier of a project or shell.
scheduleSheet	Name of Schedule Sheet to import activities into.
scheduleXML	Content of activities to import. This is obtained from the Primavera P5/P6 xml content. The Primavera XML content should be generated by exporting the full Primavera project.

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

createScheduleActivities("acme","acme_authcode","Proj-0001","Schedule Sheet 001", "<XML Content>");

Additional Information

You must perform appropriate data mapping setups on the target schedule sheet. This includes mapping Unifier Schedule Sheet columns to Primavera XML elements, and setting appropriate XML Import options. Only elements that are mapped will be copied.

This method can only be used to create new activities not for updating existing activities.

If invoked on an empty schedule sheet, this method will insert activities into the schedule sheet. If invoked on a non-empty schedule sheet, it will overwrite all existing activities (delete and recreate) in the non-empty schedule sheet if this function is allowed in the data mapping setup.

If the method is called on a non-empty schedule sheet and the data mapping setup does not allow overwrite, then the method will return an error in the response.

This service can be used for Projects/Shells of cost code type CBS.

Activity identified with this creation method will be the globally unique identifier (GUID).

Data Mapping Marked as default will be used.

Create Schedule Sheet Activities V2 from Oracle Primavera P6 XML

Figure 37: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method creates activities into an existing Unifier project or shell (cost code type CBS) level schedule sheet based on the data mapping parameter and schedule options provided as part of Web Service call.

Support

This method can only support creation of activities in project or shell (cost code type CBS) level schedule sheets.

Installation: ASP and Self host

Level	Yes or No
Company Level	No
Project and Shell Level	Yes

Prototype

public XMLObject createScheduleActivitiesV2(String shortname, String authcode, String projectNumber, String sheetName, String sheetXML, String scheduleOptions);

Parameters

Parameter	Description
Shortname	Identifier of the company, company's short name
Authcode	Authentication code for the company, in text string
projectNumber	Identifier of a project or shell.
sheetName	Name of Schedule Sheet to import activities into.
sheetXML	Content of activities to import. This is obtained from the Primavera P5/P6 xml content. The Primavera XML content should be generated by exporting the full Primavera project.
scheduleOptions	This element will allow message to carry optional information. Following are the tags under this element ▸ <MapName/> ▸ <ActivityIdentifier/> ▸ <CBS_NoOfLevelsToMerge/> ▸ <CBS_StartMergeFrom/>

Parameter	Description
MapName	Name of the data mapping that should be used while processing a XML file. If there is no map name then the one marked "Default" in Unifier on the schedule sheet will be used.
ActivityIdentifier	Possible values are the globally unique identifier (GUID)or ID. ID is the tag of Activity Id in Primavera. This tag will be used if you want to update an activity through udpateScheduleActivities webservice call. If Id tag is used for create and update then the value provided under Id tag will be used as task / activity identifier.
CBS_NoOfLevelsToMerge	This parameter will take a numeric value. This parameter can be used by user to specify how many levels (CBS Levels) in P6 XML file should be merged together. EXAMPLE: Assume that P6 has following structure: (5.ON.DA.DA03.F350.U11.095.ABC20.CAct04). If you specify 3, then three levels will be merged together and the 3 segments will be based on the next parameter (CBS_startmergefrom). Value of this parameter can be 0.
CBS_StartMergeFrom	This parameter will take a numeric value. Value of this parameter will be used to determine the level from which this merge should start. EXAMPLE: In the above example, if a user specifies 2, then system will start from level 2 and merge ON, DA and DA03. So after the merge the CBS Code build by import program will be 5.ONDADA03.F350.U11.095.ABC20.CAct04. Value of this parameter can be 0.

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

createScheduleActivitiesV2("acme","acme_authcode","Proj-0001","Schedule Sheet 001", "<XML Content>","<scheduleoptions>");

Additional Information

You must perform appropriate data mapping setups on the target schedule sheet. This includes mapping Unifier Schedule Sheet columns to Primavera XML elements, and setting appropriate XML Import options. Only elements that are mapped will be copied.

This method can only be used to create new activities not for updating existing activities.

If invoked on an empty schedule sheet, this method will insert activities into the schedule sheet. If invoked on a non-empty schedule sheet, it will overwrite all existing activities (delete and recreate) in the non-empty schedule sheet if this function is allowed in the data mapping setup.

If the method is called on a non-empty schedule sheet and the data mapping setup does not allow overwrite, then the method will return an error in the response.

This service can be used for Projects/Shells of cost code type CBS.

- Activity identified with this creation method can be GUID or ID
- CBS Code will be derived automatically based on the XML file. For more information, see ***Associate CBS Codes with Activities*** (on page 33).

Create Schedule Activities from file V2

Figure 38: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This option will allow user to process a P6 XML file and add activities and resources to a Unifier schedule sheet. Along with activity information this process will also take activity spread information. Since the activity spread information data can be a lot, this method allows user to send in information in a .zip file.

Support

Installation: ASP and Self host

Level	Yes or No
Company Level	No
Project and Shell Level	Yes

Prototype

public XMLObject createScheduleActivitiesFromFileV2(String shortname, String authcode, String projectNumber, String sheetname, String scheduleoptions, String iszipfile, FileObject[] files);

Parameters

Parameter	Description
Shortname	identifier of the company, company's short name
Authcode	authentication key for the company, in text string
projectNumber	Identifier of the project or shell.
sheetName	Identifies the name of the schedule sheet.
iszipfile	This tag identifies if the file provided under files tag is a zip file or .xml file with just activity and resource information. If user wants to send activity spread information then the value of this tag should be yes and the file provided under files tag should be a zip file containing activity/ resource information and the spread information.
files	FileObject containing the Activity / Resource information and the activity spread information. FileObject is made up of two components String filename (this should be the name of the zip file) and the zip file with two files, one for activity / resource information and one with activity spread information. Name of the activity/ resource information should be same as the one given under <scheduleoptions>.<ActivityFileName>tag and the name of the name of the activity spread information should be same as the one given under <scheduleoptions>.<SpreadFileName>.
scheduleOptions	This element will allow message to carry optional information. Following are the tags under this element <MapName/> <ActivityIdentifier/> <CBS_NoOfLevelsToMerge/> <CBS_StartMergeFrom/> <ActivityFileName/> <SpreadFileName/>
MapName	Name of the data mapping that should be used while processing XML file

Parameter	Description
ActivityIdentifier	Possible values are GUID, ID. ID is the tag of Activity Id in Primavera.
CBS_NoOfLevelsToMerge	This parameter will take a numeric value. This parameter can be used by user to specify how many levels (CBS Levels) in P6 XML file should be merged together. EXAMPLE: Assume that P6 has following structure: (5.ON.DA.DA03.F350.U11.095.ABC20.CAct04). If you specify 3 then three levels will be merged together, and the 3 segments will be based on the next parameter (CBS_startmergefrom)
CBS_StartMergeFrom	▸ This parameter will take a numeric value. Value of this parameter will be used to determine the level from which this merge should start. ▸ EXAMPLE: In the above example, if a user specifies 2, then system will start from level 2 and merge ON, DA and DA03. So after the merge the CBS Code build by import program will be 5.ONDADA03.F350.U11.095.ABC20.CAct04
ActivityFileName	Name of the file that contains the activity and resource information. Please refer to files tag
SpreadFileName	Name of the activity spread file name. Please refer to files tag

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

createScheduleActivitiesFromFileV2("acme","acme_authcode","Proj-0001","Schedule Sheet 001", "<XMLContent>","yes","<scheduleoptions>",files);

Additional Information

Format of spread file should be similar to Sample Spread Data example.

While processing spread information, the system will only look for <amt> tag.

If the Import from external source option is checked in Unifier and spread information is not available in XML file then system will error out. This error condition is also valid when this tag is not available in the XML file.

Activity File should start and end with <List_Wrapper> tag

Spread file should not contain any <List_Wrapper> tag

Update Schedule Sheet Activities from Oracle Primavera P5 and P6 XML

Figure 39: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method will insert/update activities into any project or shell schedule sheet. It will not overwrite existing activities in the schedule sheet.

Support

This method can only update activities in project or shell level schedule sheets.

Installation: ASP and Self host

Level	Yes or No
Company Level	No
Project or Shell Level	Yes

Prototype

public XMLObject updateScheduleActivities(String shortname, String authcode, String projectNumber, String sheetName, String sheetXML);

Parameters

Parameter	Description
shortname	Identifier of the company, company's short name
authcode	Authentication code for the company, in text string
projectNumber	Identifier of a project or shell.
sheetName	Name of Schedule Sheet to import activities into.

Parameter	Description
sheetXML	Content of activities to import. This is obtained from the Primavera P5/P6 xml content. The Primavera XML content should be generated by exporting the full Primavera project.

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

updateScheduleActivities("acme","acme_authcode","Proj-0001","Schedule Sheet 001", "<XML Content>");

Additional Information

You must perform appropriate data mapping setups on the target schedule sheet. This includes mapping Unifier Schedule Sheet columns to Primavera XML elements, and setting appropriate XML Import options.

This method will insert/update activities into any project or shell schedule sheet. It will not overwrite existing activities in the schedule sheet. The method will utilize the data mapping setup to update only those elements that are mapped.

The method errors out if the data mapping option does not allow merge.

Activities are uniquely identified within Primavera by the Globally Unique Id (<GUID>). The GUID is assumed to be unique not just within Primavera but across all products including Unifier.

Resource assignments will be imported (inserted/updated) if the 'Import Resource Assignments' check box is selected. Resource assignments will be matched by Resource Name.

This service can be used for Projects/Shells of cost code type CBS.

Update Schedule Sheet Activities V2 from Oracle Primavera P6 XML

Figure 40: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method will insert/update activities into any project or shell schedule sheet. It will not overwrite existing activities in the schedule sheet based on the data mapping parameter.

Support

This method can only support updation of activities in project or shell level schedule sheets.

Installation: ASP and Self host

Level	Yes or No
Company Level	No
Project or Shell Level	Yes

Prototype

public XMLObject updateScheduleActivitiesV2(String shortname, String authcode, String projectNumber, String sheetName, String sheetXML, String scheduleOptions);

Parameters

Parameter	Description
shortname	Identifier of the company, company's short name
authcode	Authentication code for the company, in text string
projectNumber	Identifier of a project or shell.
sheetname	Name of Schedule Sheet to import activities into.
sheetXML	Content of activities to import. This is obtained from the Primavera P5/P6 xml content. The Primavera XML content should be generated by exporting the full Primavera project.
scheduleOptions	This element will allow message to carry optional information. Following are the tags under this element <MapName/> <ActivityIdentifier/> <CBS_NoOfLevelsToMerge/> <CBS_StartMergeFrom/> <ActivityDeletion/>
MapName	Name of the data mapping that should be used while processing XML file
ActivityIdentifier	Possible values are GUID, ID. ID is the tag of Activity Id in Primavera.

Parameter	Description
CBS_NoOfLevelsToMerge	This parameter will take a numeric value. This parameter can be used by user to specify how many levels (CBS Levels) in P6 XML file should be merged together. ▸ EXAMPLE: Assume that P6 has following structure (5.ON.DA.DA03.F350.U11.095.ABC20 .CAct04) If you specify 3 then two levels will be merged together. But which 3 segments will be based on the next parameter (CBS_startmergefrom)
CBS_StartMergeFrom	▸ This parameter will take a numeric value. Value of this parameter will be used to determine the level from which this merge should start. ▸ EXAMPLE: In the above example, if a user specifies 2, then system will start from level 2 and merge ON, DA and DA03. So after the merge the CBS Code build by import program will be 5.ONDADA03.F350.U11.095.ABC20.C Act04
ActivityDeletion	Indicate to delete activities from schedule sheet in Unifier if it is deleted in P6.

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

updateScheduleActivitiesV2("acme","acme_authcode","Proj-0001","Schedule Sheet 001", "<XML Content>","Data Mapping 001","Id");

Additional Information

You must perform appropriate data mapping setups on the target schedule sheet. This includes mapping Unifier Schedule Sheet columns to Primavera XML elements, and setting appropriate XML Import options.

This method will insert/update activities into any project or shell schedule sheet. The method will utilize the data mapping setup to update only those elements that are mapped.

The method errors out if the data mapping option does not allow merge.

Activities are uniquely identified within Primavera by the Globally Unique Id (<GUID>) or the identified provided as part of XML file. GUID will be used if ActivityIdentifier is empty or blank.

Resource assignments will be imported (inserted/updated) if the 'Import Resource Assignments' check box is selected. Resource assignments will be matched by Resource Name.

This service can be used for Projects/Shells of cost code type CBS.

- Activity identified with this creation method can be GUID or ID
- On the options tab of Data Mapping, merge existing schedule option should be checked.
- CBS Code will be derived automatically based on the XML file. For more information, see ***Associate CBS Codes with Activities*** (on page 33).
- ActivityDeletion tag logic is based on the "Delete Activity" check box available on data mapping window in Unifier. Following is the logic for this tag

Delete Check Box	Activity Deletion	Behavior
Deselected	Auto or Confirm	Activity Deletion tag is ignored. Activities that are removed under source schedule will not be removed from the Schedule Sheet.
Selected	Auto	Activity Deletion tag is considered Activities that are removed under source schedule will be deleted automatically under Unifier Schedule Sheet.
Selected	Confirm	Activity Deletion tag is considered Activities that are removed under source schedule will not be deleted. System will return an error and will not update Unifier schedule sheet. If no activities are removed under source schedule then the system will update the Schedule Sheet.

ActivityDeletion tags are only considered for updateScheduleSheetFromFileV2 service and not for create.

Update Schedule Activities From File V2

Figure 41: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This option will allow user to process a P6 XML file and add and update activities and resources to a Unifier schedule sheet. Along with activity information this process will also take activity spread information.

Support

Installation: ASP and Self host

Level	Yes or No
Company Level	No
Project and Shell Level	Yes

Prototype

public XMLObject updateScheduleActivitiesFromFileV2(String shortname, String authcode, String projectNumber, String sheetname, String scheduleoptions, String iszipfile, FileObject[] files);

Parameters

Parameter	Description
Shortname	identifier of the company, company's short name
Authcode	authentication key for the company, in text string
projectNumber	Identifier of the project or shell.
sheetName	Identify the name of the schedule sheet.
iszipfile	This tag identifies if the file provided under files tag is a zip file or .xml file with just activity and resource information. If user wants to send activity spread information then the value of this tag should be yes and the file provided under files tag should be a zip file containing both activity and resource information and the spread information.

Parameter	Description
files	FileObject containing the Activity / Resource information and the activity spread information. FileObject is made up of two components String filename (this should be the name of the zip file) and the zip file with two files, one for activity / resource information and one with activity spread information. Name of the activity/ resource information should be same as the one given under <scheduleoptions>.<ActivityFileName>tag and the name of the name of the activity spread information should be same as the one given under <scheduleoptions>.<SpreadFileName>.
scheduleOptions	This element will allow message to carry optional information. Following are the tags under this element <MapName/> <ActivityIdentifier/> <CBS_NoOfLevelsToMerge/> <CBS_StartMergeFrom/> <ActivityDeletion> <ActivityFileName> <SpreadFileName>
MapName	Name of the data mapping that should be used while processing XML file
ActivityIdentifier	Possible values are GUID, ID. ID is the tag of Activity Id in Primavera.
CBS_NoOfLevelsToMerge	This parameter will take a numeric value. This parameter can be used by user to specify how many levels (CBS Levels) in P6 XML file should be merged together. ▸ EXAMPLE: Assume that P6 has following structure (5.ON.DA.DA03.F350.U11.095.ABC20.CAct04) If you specify 3 then two levels will be merged together. But which 3 segments will be based on the next parameter (CBS_startmergefrom)

Parameter	Description
CBS_StartMergeFrom	▸ This parameter will take a numeric value. Value of this parameter will be used to determine the level from which this merge should start. ▸ EXAMPLE: In the above example, if a user specifies 2, then system will start from level 2 and merge ON, DA and DA03. So after the merge the CBS Code build by import program will be 5.ONDADA03.F350.U11.095.ABC20.CAct04
ActivityDeletion	This tag will allow user to determine if the activities that does not exists in P6 should be deleted from Unifier schedule sheet. Possible values are Auto / Confirm.
ActivityFileName	Name of the file that contains the activity and resource information. Please refer to files tag
SpreadFileName	Name of the activity spread file name. Please refer to files tag

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

updateScheduleActivitiesFromFileV2 ("acme","acme_authcode","Proj-0001","Schedule Sheet 001", "<XML Content>","yes","<scheduleoptions>",files);

Additional Information

ActivityDeletion tag logic is based on the "Delete Activity" check box available on the data mapping window. Following is the logic for this tag

Delete Check Box	Activity Deletion	Behavior
Deselected	Auto or Confirm	Activity Deletion tag is ignored. Activities that are removed under source schedule will not be removed from Unifier Schedule Sheet

Delete Check Box	Activity Deletion	Behavior
Selected	Auto	Activity Deletion tag is considered Activities that are removed under source schedule will be deleted automatically under the Schedule Sheet.
Selected	Confirm	Activity Deletion tag is considered Activities that are removed under source schedule will not be deleted. System will return an error and will not update the schedule sheet. If no activities are removed under source schedule then system will update Unifier Schedule Sheet.

ActivityDeletion tags are only considered for updateScheduleSheetFromFileV2 service and not for create.

While processing spread information, the system will only look for ""tag.

If the Import from external source option is checked in Unifier and spread information is not available in XML file then system will error out. This error condition is also valid when this tag is not available in the XML file.

Activity File should start and end with <List_Wrapper> tag

Spread file should not contain any <List_Wrapper> tag

Get Schedule Sheet Activities from Unifier

Figure 42: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method will extract activities from any project or shell (cost code of type CBS) schedule sheet.

Support

This method can only extract activities from project or shell level schedule sheets.

Installation: ASP and Self host

Level	Yes or No
Company Level	No
Project and Shell Level	Yes

Prototype

public XMLObject getScheduleActivities(String shortname, String authcode, String projectNumber, String scheduleSheet);

Parameters

Parameter	Description
Shortname	Identifier of the company, company's short name
Authcode	Authentication code for the company, in text string
projectNumber	Identifier of a project or shell.
scheduleSheet	Name of Schedule Sheet to import activities into.

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

getScheduleActivities("acme", "acme_authcode", "Proj-0001","Schedule Sheet 001");

Additional Information

The XML return object contains a Unifier specific format. You will need to write additional integration logic to convert it to other formats.

This service can be used for Projects/Shells of cost code type CBS.

Get a List of Project Schedule Sheets

Figure 43: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method will return a list of Schedule Sheets within a Project or Shell.

Support

This method can only list Schedule Sheets from projects or shells.

Installation: ASP and Self host

Level	Yes or No
Company Level	No
Project and Shell Level	Yes

Prototype

public XMLObject getScheduleSheetList(String shortname, String authcode, String projectnumber, String options);

Parameters

Parameter	Description
shortname	Identifier of the company, company's short name
authcode	Authentication code for the company, in text string
projectnumber	Identifier of a project or shell.
options	This parameter allows the user to filter the list based on the following: <status>: select a status of Active or Inactive. If no status is provided then all sheets are returned. <main_sheet>: Set to true or false in order to specifiy if the master sheet is to only be returned. Setting true will return only the master schedule. <filter_condition>: two filter conditions are available; name and sheet_lock. The name is the name of the sheet and sheet_lock can have a value of true or false in order to only return locked schedule sheets.

Return Value

See ***Appendix A: Return Values*** (on page 831). Message will return list of Schedule Sheets based on filter condition.

Sample Method

getScheduleSheetList("acme", "acme_authcode", "P-000001", status=Active);

Get a List of Schedule Sheet Data Mappings

Figure 44: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method will return a list of Data Mappings configured for a Schedule Sheet within a Project or Shell.

Support

This method can only list Data Mappings from Schedule Sheets within projects or shells.

Installation: ASP and Self host

Level	Yes or No
Company Level	No
Project and Shell Level	Yes

Prototype

public XMLObject getScheduleSheetDataMaps(String shortname, String authcode, String projectnumber, String sheetname, String options);

Parameters

Parameter	Description
shortname	Identifier of the company, company's short name
authcode	Authentication code for the company, in text string
projectnumber	Identifier of a project or shell.
sheetname	Identifier of the schedule sheet within the project or shell.
options	This parameter allows the user to filter the list based on the following: <datamap_name>: The name of a specific data mapping to be retrieved. <filter_condition>: one filter conditions is available; isdefault. If set to true only the data mapping flagged as the default will be returned.

Return Value

See ***Appendix A: Return Values*** (on page 831). Message will return list of Schedule Sheets based on filter condition.

Sample Method

getScheduleSheetDataMaps ("acme", "acme_authcode", "P-00001", "Master Schedule", isdefault=true);

User Defined Reports (UDR) Methods

Figure 45: Support for SOAP is deprecated starting with Unifier 23.10.

Get UDR Data

Figure 46: Support for SOAP is deprecated starting with Unifier 23.10.

Description

This method gets XML data from UDR output.

Support

This process is supported under both Company and Project or Shell level reports. Only reports that are marked for Integration are eligible for integration.

Installation: ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	Yes

Prototype

public XMLObject getUDRData(String shortname, String authcode, string projectNumber, String reportName);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name

Parameter	Description
authcode	authentication key for the company, in text string
projectNumber	identifier of the project or shell. If you want to get company level report then pass null for this parameter.
reportName	name of the report user defined report

Return Value

Response will contain following data elements

Tag Name	Description
<report>	Main report tag
<report_header>	Element that carries all report header column names.
<report_row>	Element that carries data of all rows. This element will also show following information **Group By**: If report has group by condition then the data value will show under this element **Subtotal:** If report is configured to show sub-total then the data value will show under this element **Count:** If report is configured to show count then the data value will show under this element.

Sample Method

getUDRData ("acme", "acme_authcode", "project_info", "Funding Report")

The XML output of an UDR will be based on report design.

- Tabular UDR with no Group
- Tabular UDR with Group
- Tabular UDR with Sub-Total
- Tabular UDR with Count
- Cross Tab UDR
- Summary UDR
- Alert UDR

Additional Information

A user-defined report (UDR) always runs upon receiving the message. This ensures that the latest data is returned.

Web Services call does not need any additional permission to run a UDR that is marked for Integration

If UDR has query parameters defined then the Web Services method will retain that as long as the query parameters are pre-populated during report design

Following are the failure reasons and description

Reason	Description
Report name is not valid. Check if report exists or is enabled for Integration	Invalid Report Name (If report does not exist or is not marked for Integration)
Unable to run report. Contact System Administrator	While running report if there is a system error or for any reason Unifier cannot run this report

This service can be used for Projects/Shells of cost code type CBS and Generic.

In case of the getUDR web-service call:

- If the report data being retrieved is based on permission aware data sources, then nothing will be returned.
- If the report being retrieved is based on system defined data sources, then it will work as per existing functionality.

Cost Sheet Methods

Figure 47: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Get Column Data

Figure 48: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method gets data from a project or shells (with cost codes CBS) cost sheet column.

Support

This method is only supported for cost sheet columns. The Get Column Data Web Services call method will only fetch data for the following combination of Type and Datasource:

(1) Type = Direct Entry and Datasource = Project Cost (1 - 100)

(2) Type = Line Item Content and Datasource = Project Cost (1 - 100)

(3) Type = Line Item Content and Datasource = AFC

(4) Type = Line Item Content and Datasource = YTB (Yet To Buy)

Installation: ASP and Self host

Level	Yes or No
Company Level	No
Project and Shell Level	Yes

Prototype

public XMLObject getColumnData(String shortname, String authcode, string projectNumber, String ColumnName);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
authcode	authentication key for the company, in text string
projectNumber	Identifier of the project or shell.

Parameter	Description
columnName	Identifier of the cost sheet column. This is case sensitive, and should be the name of Column that is defined in Unifier.

Return Value

See ***Appendix A: Return Values*** (on page 831). Response will contain following data elements.

Tag Name	Description
<CBS_code>	CBS Code is a required field.
<short_description>	Short Description
<long_description>	Long Description
<work_package>	Work Package Name
<spends_category>	Spends Category Label
<quantity>	Quantity
<unit_of_measure>	Unit of Measure
<unit_cost>	Unit Cost Label
<amount>	Amount

Sample Method

getColumnData("acme", "acme_authcode", "project_info","my column name")

Additional Information

Following are the failure reasons and description

Reason	Description
Column is not valid	Invalid Column Name
Column is not manual	Column is not defined as manual entry

If the cost sheet column entry method is "Line Item Content" then this web service call will only return lines for CBS Code which has valid lines. For example, if there are 2 CBS Codes on cost sheet and one has line item content and other does not then only CBS Code with line item content will be returned.

If the cost sheet column entry method is "Direct Entry" then this web service call will return a line for a CBS Code even if there is no data manually entered against that CBS Code in project or shell cost sheet. For example, if there are 2 CBS Codes on cost sheet and one has a value entered directly on cost sheet and other does not have any value, even then this service call will return 2 lines, one for each CBS Code. Following are the elements that will be returned as part of each CBS Code.

Observe that short_description element will automatically get a value "Direct Entry Line Item". This is to indicate that the value was entered directly on cost sheet.

This service can be used for Projects/Shells of cost code type CBS.

Update Column Data

Figure 49: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method updates data of a project or shells (cost code type CBS) cost sheet column. This method replaces entire data.

Support

This method can only support for project or shell level cost sheet column that is defined as Manual Entry Method. This column does not support Assigned Budget column. This method does not support incremental or delta changes to a column.

Installation: ASP and Self host

Level	Yes or No
Company Level	No
Project and Shell Level	Yes

Prototype

public XMLObject updateColumnData(String shortname, String authcode, string projectNumber, String ColumnName, String DataXML);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
authcode	authentication key for the company, in text string
projectNumber	Identifier of the project or shell.
columnName	Identifier of the cost sheet column. This is case sensitive, and should be the name of Column that is defined in Unifier.
columnXML	identifier for Column content in XML format

Return Value

DataXML Elements

The elements that include as part of DataXML parameter are:

Tag Name	Description
<CBS_code>	CBS Code is a required field.
<short_description>	This is a required field.
<long_description>	This is an optional field
<work_package>	This is an optional field. But use should specify a work package name which is valid under a project or shell. Data entered under this element will be ignored for company level cost column
<spends_category>	This is an optional field. Data sent through this data element should be validated against the data set values
<quantity>	This is an optional field. Data sent through this data element should be numeric. Any other data will be considered as illegal and error should be returned back to user. If user did not send a value for this, then "0" will be assumed as value.
<unit_of_measure>	This is an optional field. Data sent through this data element should be validated against the data set values
<unit_cost>	This is an optional field. Data sent through this data element should be numeric. Any other data will be considered as illegal. If user did not send a value for this, then "0" will be assumed as value.
<amount>	This is an optional field. User cannot enter any value for this element. Value of this data element should be automatically calculated as (Quantity * Unit Cost)

Project or Shell → Administrator will be used as user who is performing this integration. Audit log will track and trace all changes done through this web services method.

Sample Method

updateColumnData("acme", "acme_authcode", "project_info","my column name", "DataXML")

Additional Information

Following are the failure reasons and description

Reason	Description
Column is not valid	Invalid Column Name
Column is not manual	Column is not defined as manual entry
Administrator is inactivated	Administrator is inactive. Cannot create column data.

This service can be used for both Project (Standard) and Shells of cost code type CBS.

Business Process (BP) Methods

Figure 50: Support for SOAP is deprecated starting with Unifier 23.10.

Create BP Record

Figure 51: Support for SOAP is deprecated starting with Unifier 23.10.

Description

This method can be used to:

- Create business process records in Unifier based on Integration design that has been defined in uDesigner. For more information, refer to the *Unifier uDesigner User Guide*.
- Create group line items together. You can assign a group name to provide the context of the line items.

If you want to create a BP record with line item information, then you must use this service. If this is a cost related BP, line items will be rolled up to the cost sheet.

> **Note**: When you a create record through a web service, and you want to send the newly created record with a record number (record_no) value to Unifier, to avoid duplicating record numbers, do not include a value for the next record number because the value has already been configured in the BP setup. You can only enter a value in the record number (record_no) field, if you are getting the value from an external system, or you are self-generating a value, and the value does not fall into the same sequence number pattern as set in the BP setup. In this scenario, when you are sending the record number (record_no) value to the application, it is important to know that providing a unique record number

(record_no) value is your responsibility.

See ***Create BP Record (Additional Information)*** (on page 102) for important additional details.

Support

This process supports all type of BPs

Installation: ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	Yes

Prototype

public XMLObject createBPRecord(String shortname, String authcode, string projectNumber, String BPName, String BPXML);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
authcode	authentication key for the company, in text string
projectNumber	Identifier of the project or shell. If you want to create a BP record at Company level then pass null for this parameter.
BPName	Identifier of the business process, for example: Invoice. This is case sensitive, and should be the name as given in uDesigner
BPXML	identifier for BP content in XML format

BPXML Elements

The elements that include as part of BPXML parameters is dependent on the Integration interface design of your BP in uDesigner. XML format can be exported (downloaded) from uDesigner. Elements with direction marked as "Input" or "Both" will be part of XML format.

Note that elements lists should be send based on the type of BP and your design in uDesigner.

Following a list of elements that can be included as part of integration design in uDesigner and behavior when you include them. Note that elements lists should be sent based on the type of BP for which you are creating a record.

Tag Name	BP Type	Description
<amount>	Cost	Amount is a required field if you are sending line item information under _bp_lineitems. You will see same value on Unifier.
<CBS_code>	Cost	CBS Code is a required field if you are sending line information under _bp_lineitems.
<status>	Any	a) If BP uses a status field then you can send status tag. b) If the BP is a workflow based then the record will be created and will stay in the initial status that is valid. User has to go through remaining workflow process. c) If it is non-workflow based then the message can send a valid status and the record will take that status. If there is only one status defined for the BP then by default that status will be picked even if user sends a wrong status value.

Tag Name	BP Type	Description
<record_no>	Any	You can send record number by using this tag. If you do not specify a record_no tag as part of message then a new record will be created. The system will assign a record number. If you specify a record_no then system will create a record with the given record number. If the record number is a duplicate number then an error message will be send back as response. If the record_no is specified and if it does not exists then a new record will be created.
<_comment>	Text BP	Enter the responses (comments) associated with the BP record.
<li_group_name>	All BPs that support Summary line items other than Summary Payment Application BPs of Base Commit, Change Commit and Payment Applications.	Use to specify group name.

Return Value

See ***Appendix A: Return Values*** (on page 831). This is dependent on which WSDL you are going to use.

If you use WSDL -1 then you should expect XMLObject as return value.

If you use WSDL - 2 then you should expect XMLFileObject as return value.

Create BP Record (Additional Information)

Figure 52: Support for SOAP is deprecated starting with Unifier 23.10.

This topic includes additional information about creating BP records.

Sending Integration Request

When you send an integration request that updates or inserts a formula field, check to ensure that the input data for the formula field complies with the data definition. If the input data for the formula field does not comply with the data definition, then the system will reject your request for update or insert.

BP XML Structure

To get the BP XML structure, first send a message to get BP record. Refer to the Web Service ***getBPRecord*** for more information.

Interface

This interface can be extended with additional data elements. In order for Unifier to recognize those elements, the data element name must match those created in uDesigner for this business process.

YTB/AFC

If the tags YTB or AFC are present in the line items, the system processes these tags. If they are not present, Unifier will check the uDesigner BP setup configuration for Cost Adjustment. If this field has been set, the line item amount is treated as YTB/AFC and processed.

Single Record BP

Record Exists

If you send a message for a single record BP and the record exists, Unifier will not send back an error; but if you send an invalid record number, it will send back an error.

Record does not exist

If you send a message for single record BP and a record does not exist, Unifier will create a record for you. If the BP type is of Line item then any line items included in the message will be added to the BP record. If the BP type is of Simple then any line items added as part of message will be ignored.

If your BP has **uuu_creation_date** then it will be populated when you send a message

If your Cost BP has fund related information then you have to send Fund code details. If you are using multi segment fund code then send the code segments with delimiters.

Example:

Fundseg1-Fundseg2-Fundseg3.

The fund information send as part of Cost BP will be rolled up to Funding Sheet or Cost Sheet.

You cannot send fund related information for Cost Type BPs such as General Spends and Payment Applications.

All data element values provided as part of integration message will be validated against the action form selected as part of design in uDesigner. Validation includes required field, form validation, and so on.

The following XML tag <_refnum> </refnum> should be added under BP line item tag <_bp_lineitem> </bp_lineitem> to support the ability to import the line items for General Spends and Payment Applications if SOV is individual line items. For Group by commit codes lines are identified by CBS Code.

If the action form used for validation is auto-populating values from a Business Process picker then system will auto-populate these values if a valid value is provided for that Business Process Picker.

This service can be used for Projects/Shells of cost code type CBS and Generic.

Additional element and sub elements (XML tags) within the line items (_bp_lineitems) of Summary Payment Application SOV Type

To perform Cost allocation to line items, use the following information:

Note: For additional details, refer to the *Unifier Data Reference Guide*.

Tag Name	BP Type	Description
<_cost_allocation>	Cost (Base Commit and Change Commit of Summary Payment Application SOV type)	Cost allocation for the summary line item will be done using _cost_allocation.
<bItemID>	Cost (Base Commit and Change Commit of Summary Payment Application SOV type)	bItemID, which is CBS Code, is a required field if you are sending costed line item information under _cost_allocation.
<short_desc>	Cost (Base Commit and Change Commit of Summary Payment Application SOV type)	Required field.
<uuu_quantity>	Cost (Base Commit and Change Commit of Summary Payment Application SOV type)	Required field if cost line item type specified in _bp_lineitems has been set as Unit Cost. The Unit Cost information is specified in _bp_lineitems.

Tag Name	BP Type	Description
<amount>	Cost (Base Commit and Change Commit of Summary Payment Application SOV type)	Required field if cost line item type specified in _bp_lineitems has been set as Lump Sum.
<_bp_lineitems>	Cost (Base Commit and Change Commit of Summary Payment Application SOV type)	Optional field. Use when modifications are needed for line items that have already been committed in an SOV.

The Payment Application detail form is a customized form that is designed in uDesigner. This form will have a set of fixed and user-defined fields. The Input XML for Payment Application will include the following:

- All existing XML tags that are currently applicable for the classic Payment Application Business Process.
- The tags listed in the following table:

Note: The table only lists out the system defined Data Element behavior specific to Payment Applications of SPA SOV type

Available for data input in Elements	Tags / Data elements specific to Payment Application	Additional comments
_bp_lineitems and _cost_allocation	Reference (_refnum)	This will be the identifier for the line item that needs to be paid. This field cannot be empty when the _bp_lineitems block has values in other fields. This will be the identifier for the costed line item as well.
_cost_allocation	bItemID (Cost Code)	This field cannot be empty when the _cost_allocation block has values in the other fields. Combination of _refnum and bItemID will be used to identify the costed line against which the payment has to be made. If there are duplicate _refnum and CBS codes in multiple cost allocation blocks then the creation/update will fail.

Available for data input in Elements	Tags / Data elements specific to Payment Application	Additional comments
_bp_lineitems and _cost_allocation	short_desc (Description)	Both at summary and costed line levels.
_bp_lineitems and _cost_allocation	uuu_spa_qty_tp (Quantity this Period)	Since the Input XML will be common for both Lump Sum and Unit cost the tags will always be available. Any value entered in this field when cost type is Lump Sum, will be ignored.
_bp_lineitems and _cost_allocation	uuu_spa_amt_tp (Amount this Period)	Since the Input XML will be common for both Lump Sum and Unit cost the tags will always be available. Any value entered in this field when cost type is Unit Cost, will be ignored.
_bp_lineitems and _cost_allocation	uuu_spa_other_tp (Other Amount this Period	Both summary line items and costed lines can have this field value.
_bp_lineitems and _cost_allocation	uuu_spa_mat_stored (Material Stored)	Both summary line items and costed lines can have this field value.
_bp_lineitems	uuu_spa_per_comp (Percentage Complete To Date)	Only summary line items can have this field value.

Notes:

- The "_bp_lineitems" elements will be as per the detailed integration interface design.
- The "_cost_allocation" elements will mostly be the same as "_bp_lineitems" elements, but the editability of the fields is governed by the logic currently existing in the system.
- The Payment Application has certain restrictions regarding fields that can be edited at the Summary or Allocation levels:
- If the XML template has values in the "_bp_lineitems" elements that are not allowed, for example, CBS codes, then such values are ignored.
- There are certain fields such as "uuu_cost_li_type" which should be entered only at the Summary level.
- If the XML has the value in the "_cost_allocation", then such values

are ignored.

Behavior Specific to Summary Payment Application SOV type BPs

The following information is applicable to the *Base Commit*, *Change Commit*, and *Payment Application Business Processes of Summary Payment Application SOV type*.

- Business Process records can be created both with and without line items, by using various Create methods.
- Standalone Create methods also exist by using a line items that can be added to an existing Business Process record, for example, Add BP Line Item.

In both cases mentioned above, you can add the summary line items along with the cost allocation.

For adding line items to the Change Commit BP records from SOVs (modifying committed line items) using Input XMLs use the following:

- The reference tag uuu_sovlinum in the _bp_lineitems element determines the SOV line that will be modified. The costed lines that need to be updated will be identified by the uuu_sovlinum and Cost Code/ bItemId. The combination of uuu_sovlinum and Cost Code/ bItemId must be unique. Post record creation of all costed lines belonging to the summary line item will be added.
- If the input XML has the cost line item type field, then the system checks to ensure that the uuu_sovlinum and uuu_cost_li_type are as per SOV line. If there is a mismatch, the system generates an integration error.
- If the input XML has both uuu_sovlinum and uuu_cost_li_type fields, but the uuu_cost_li_type field has an invalid value, then the system generates an integration error.
- If the input XML has just the uuu_sovlinum and the uuu_cost_li_type field is blank, then no check will be performed for cost line item type validation.
- The Short description from a committed line comes from the SOV. When a line item has the uuu_sovlinum value, the short description field can empty. At runtime the value comes from SOV; however, if the short description value is included in the XML, then the existing value replaces the one coming from SOV.

Payment Application

The following information is specific to Payment Application.

At the time of creating a Payment Application record, details of the line items that are getting paid will be entered in the Input XML. Post creation of the record, all the line items existing for the Commit record will be seen in the record.

Example

Payment is made against Contract CON-009 and this record has 5 line items which exist in the SOV, but the payment has to be made only for Line item 1. The input XML will have all the data for this line item. After a successful integration, PayApp-010 gets created. When you open this record, all the 5 line items will be seen in PayApp-010.

Validation

Since the system adds all the line items from the SOV, which do not exist in the Input XML, the system performs additional checks at the time of creating the record.

- All auto-population and default values set for String fields will be retained at the time of creating the records. If no auto-population and default values exist for these required string fields then, the creation of record through integration will fail.
- All auto-population and default values for Numeric fields will also be retained. If no values exist then the system will default these fields to 0.
- Errors messages will be pertaining to the required field check validations.

Create Complete BP Record

Figure 53: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method can be used to create new business process records with attachments in Unifier based on Integration design that has been defined in uDesigner. It allows attachments to be added to the upper form and line items.

> **Note**: If you want to create a BP record with line item information with attachments, then you should use this service. If this is a cost related BP, line items will be rolled up to the cost sheet.

Support

This process supports all type of BPs

Installation

ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	Yes

Prototype

public XMLObject createCompleteBPRecord(String shortname, String authcode, string projectNumber, String BPName, String BPXML, String iszipfile, FileObject[] fileobjects);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
authcode	authentication key for the company, in text string

Parameter	Description
projectNumber	Identifier of the project or shell. If you want to create a BP record at Company level then pass null for this parameter.
BPName	Identifier of the business process, for example: Invoice. This is case sensitive, and should be the name as given in uDesigner
BPXML	identifier for BP content in XML format
fileobjects	Array of FileObjects, each FileObject is made up of two components: String filename (this should be the same name as in the record data <_attachment><filename> tag, and javax.activation.DataHandler as filestream. Files can be sent as a single zipped file or individual files.
isZipFile	Identifies if the file provided under the fileobjects tag is a zip file. The value for this tag is "yes" or "no". Yes to allow zip file as an attachment. Otherwise, select No. **Note:** Only .zip file format is acceptable. When using .zip file as an attachment, you should attach one zip file at a time that includes a single attachment of each file in the zip file.

BPXML Elements

The elements that include as part of BPXML parameters is dependent on the Integration interface design of your BP in uDesigner. XML format can be exported (downloaded) from uDesigner. Elements with direction marked as "Input" or "Both" will be part of XML format.

Note that elements lists should be send based on the type of BP and your design in uDesigner.

Following a list of elements that can be included as part of integration design in uDesigner and behavior when you include them. Note that elements lists should be sent based on the type of BP for which you are creating a record.

Tag Name	BP Type	Description
<amount>	Cost	Amount is a required field if you are sending line item information under _bp_lineitems. You will see same value on Unifier.
<status>	Any	a) If BP uses a status field then you can send status tag. b) If the BP is a workflow based then the record will be created and will stay in the initial status that is valid. User has to go through remaining workflow process. c) If it is non-workflow based then the message can send a valid status and the record will take that status. If there is only one status defined for the BP then by default that status will be picked even if user sends a wrong status value.
<record_no>	Any	You can send record number by using this tag. If you do not specify a record_no tag as part of message then a new record will be created. The system will assign a record number. If you specify a record_no then system will create a record with the given record number. If the record number is a duplicate number then an error message will be send back as response. If the record_no is specified and if it does not exists then a new record will be created.

Tag Name	BP Type	Description
attachment	Simple BP, Text BP, Line Item BP, Cost BP, Document Type BPs	Multiple attachment elements can be added to the upper form and to line items (if applicable). The attachment element contains sub elements that identify: File name Title Revision Number Issue Date Version Reference
<_comment>	Text BP	Enter the responses (comments) associated with the BP record.
<li_group_name>	All BPs that support Summary line items other than Summary Payment Application BPs of Base Commit, Change Commit and Payment Applications.	Use to specify group name.

Return Value

See ***Appendix A: Return Values*** (on page 831). This is dependent on which WSDL you are going to use. If you use WSDL -1, you should expect XMLObject as return value and if you use WSDL - 2, you should expect XMLFileObject as return value.

Create Complete BP Record (Additional Information)

Figure 54: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

This topic includes additional information about creating complete BP records.

Acceptable File Formats

Only .zip file format is acceptable. When using a Zip file as an attachment, you should attach one zip file at a time that includes the single attachment for each file in the zip file. To get the BP XML structure, first send a message to get BP record. Refer to the Web Service ***getBPRecord*** for more information.

This interface can be extended with additional data elements. In order for Unifier to recognize those elements, the data element name must match those created in uDesigner for this business process.

YTB/AFC

If the tags YTB or AFC are present in the line items, the system processes these tags. If they are not present, Unifier will check the uDesigner BP setup configuration for Cost Adjustment. If this field has been set, the line item amount is treated as YTB/AFC and processed.

Single Record BP

Record Exists

If you send a message for a single record BP and a record exists, Unifier will not send back an error; but if you send an invalid record number, it will send back an error.

Record does not exist

If you send a message for single record BP and a record does not exist, Unifier will create a record for you. If the BP type is of Line item, any line items included in the message will be added to the BP record. If the BP type is of Simple, any line items added as part of message will be ignored.

If your BP has **uuu_creation_date,** it will be populated when you send a message.

If your Cost BP has fund related information, you have to send Fund code details. If you are using multi segment fund code, send the code segments with delimiters.

Example

Fundseg1-Fundseg2-Fundseg3.

The fund information send as part of Cost BP will be rolled up to Funding Sheet or Cost Sheet.

All data element values provided as part of integration message will be validated against the action form selected as part of design in uDesigner. Validation includes required field, form validation, and so on.

If the action form used for validation is auto-populating values from a Business Process picker then system will auto-populate these values if a valid value is provided for that Business Process Picker.

Attachments can be added to upper form and line items, and multiple records.

Files can be sent as a single zipped file or individual files for the complete transaction record, the same file can be referenced multiple times in the same transaction; however, files contained in the zip file should still be described by separate attachment elements.

API

This API requires Integration Design to be published in uDesigner for the business process.

Attachment file cross references is not supported. The reference sub element under attachments should always have the value ‘No'.

Adding attachments is optional. If attachment elements are not provided, then the API behaves exactly like createBPRecord API.

> **Note**: This API is not compatible with non Java web services client platforms.

Total attachment size per request across all files is limited to 250 MB. It is recommended that files are compressed into 1 zip file for submission to the API.

This service can be used for Projects/Shells of cost code type CBS and Generic.

The following XML tag <_refnum> </refnum> should be added under BP line item tag <_bp_lineitem> </bp_lineitem> to support the ability to import the line items for General Spends and Payment Applications.

Creating Complete BP Record for Document type BP with Folder Structure

The Web Services calls support creating new records and allows users to include the line items assigned to a particular folder.

- The tag <folder_path> specifies the path of the folder for the line item. This tag exists in the current input XML for Document Type BP with folder structure.
- The folder path (<folder_path>) contains the names of the folders.
  - If the folders mentioned in the folder path do not exist, the folders are created and the line items are added to the last folder mentioned in the folder path.
  - If the folder names exist, the line items are created under the last folder mentioned in the path.
- The Input integration XML contains the tags, as part of bp_lineitems elements.
- The syntax of the entry for the <folder_path> field is: “/<Folder Name1>/”
- If you create the line items under the root node, the valid inputs within the tag are either “/” or blank.
- If the folder path is blank, the line item is created at the root node “Attachments” and the folder name will be “Attachments”.
- If the line items have attachments in the <_attachment> elements, the line items are added to the respective folder.

When the folders are being created through Web Services, the validations (in web interface of Unifier) are completed during the naming of the folders. You can enter non-ASCII characters as folder names. For example, you can enter Chinese characters as folder names in the folder path.

Behavior Specific to Summary Payment Application SOV Type BPs

> **Note**: The information is applicable to Base Commit, Change Commit, and Payment Application Business Processes of Summary Payment Application SOV Type BPs.

For more details about XML tags, see Create and Add Methods in the ***Create BP Record (Additional Information)*** (on page 102) section.

Add BP Line Item

Figure 55: Support for SOAP is deprecated starting with Unifier 23.10.

Description

This method adds a BP line item to an existing business process record based on Integration design that has been defined in uDesigner. For more information, refer to the *Unifier uDesigner User Guide*.

This method can also be used to create new BP records with line items, check LineXML elements sub-topic to find out more.

Support

This process supports all type of BPs.

Installation

ASP and Self host

Level	Yes or No
Company Level	Yes
Project or Shell Level	Yes

Prototype

public XMLObject addBPLineItem(String shortname, String authcode, string projectNumber, string BPName, String ItemXML);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
authcode	authentication key for the company, in text string
projectNumber	identifier of the project or shell
BPName	identifier of the business process, for example: Invoice. This is case sensitive, and should be the name as given in uDesigner
ItemXML	identifier for line item content in XML format

ItemXML Elements

The elements that include as part of LineXML parameter are dependent on the Integration interface design of your BP in uDesigner. ItemXML format can be exported (downloaded) from uDesigner. Elements with direction marked as "Input" or "Both" will be part of XML format.

The following is a list of elements that can be added as part of integration design and their behavior when you include them. Note that elements lists should be sent based on the type of BP for which you are creating a record.

Tag Name	BP Type	Description
<amount>	Cost	Amount is a required field if you are sending line item information under _bp_lineitems. You will see same value on Unifier.
<CBS_code>	Cost	CBS Code is a required field if you are sending line information under _bp_lineitems.

Tag Name	BP Type	Description
<record_no>	Any	You can send record number by using this tag. If you do not specify a record_no tag as part of message then a new record will be created with the line item information that is provided as part of ItemXML If you specify a record_no then system will add new line item(s) based on the data provided as part of ItemXML If the record_no is specified and if it does not exists then a new record will be created with the line item information that is provided as part of ItemXML.

Tag Name	BP Type	Description
<status>	Any	You can send record status by using this tag. This tag is valid only for multi-record BPs. If the record_no is specified and if it does not exists then a new record will be created with the line item information that is provided as part of ItemXML. If the BP is a workflow based then the record will be created and will be created and will stay in the initial status that is valid. User has to go through remaining workflow process. If it is a non-workflow based then the message can send a valid status and the record will take that status. If there is only one status defined for the BP then by default that status will be picked even if user sends a wrong status value.
<li_group_name>	All BPs that support Summary line items other than Summary Payment Application BPs of Base Commit, Change Commit and Payment Applications.	Use to specify group name.

Return Value

See ***Appendix A: Return Values*** (on page 831).

Add BP Line Item (Additional Information)

Figure 56: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

This topic includes additional information about adding BP line items.

Interface

This interface can be extended with additional data elements. In order for Unifier to recognize those elements, the data element name has to match those created in uDesigner for this business process.

YTB/AFC

If the tags YTB or AFC are present in the line items, the system processes these tags. If they are not present, Unifier will check the uDesigner BP setup configuration for Cost Adjustment. If this field has been set, the line item amount is treated as YTB/AFC and processed.

To add a line item to company level BP record then send null for projectNumber parameter. If you send a project number for a BP that is at Company level then you will get an error that BP name is not correct.

This service can be used for Projects/Shells of cost code type CBS and Generic.

The following XML tag <_refnum> </refnum> should be added under BP line item tag <_bp_lineitem> </bp_lineitem> to support the ability to import the line items for General Spends and Payment Applications.

This service can be used to add lines to Payment Applications and General Spends type of business process. When adding lines to Payment Applications type of business process, existing lines if any will be removed and new lines will be added that are provided as part of the service call. For General spends line will be appended like any other business process.

Behavior Specific to Summary Payment Application SOV Type BPs

> **Note**: The information is applicable to Base Commit, Change Commit, and Payment Application Business Processes of Summary Payment Application SOV Type BPs.

For more details about XML tags, see Create and Add Methods in the ***Create BP Record (Additional Information)*** (on page 102) section.

Add Complete BP Line Item

Figure 57: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method adds a BP line item to an existing business process record based on Integration design that has been defined in uDesigner. For more information, refer to *Unifier uDesigner User Guide*. It allows multiple files to be attached to the BP line item.

This method can also be used to create new BP records with line items, check LineXML elements sub-topic to find out more.

Support

This process supports all type of BPs.

Installation

ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	Yes

Prototype

public XMLObject addCompleteBPLineItem(String shortname, String authcode, string projectNumber, string BPName, String ITemXML , FileObject[] fileobjects);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
authcode	authentication key for the company, in text string
projectNumber	identifier of the project or shell in Unifier
BPName	identifier of the business process in Unifier, for example: Invoice. This is case sensitive, and should be the name as given in uDesigner
ItemXML	identifier for line item content in XML format

Parameter	Description
fileobjects	Array of FileObjects, each FileObject is made up of two components: String filename (this should be the same name as in the record data <_attachment><filename> tag, and javax.activation.DataHandler as filestream. Files can be sent as a single zipped file or individual files

ItemXML Elements

The elements that include as part of LineXML parameter are dependent on the Integration interface design of your BP in uDesigner. ItemXML format can be exported (downloaded) from uDesigner. Elements with direction marked as "Input" or "Both" will be part of XML format.

The following is a list of elements that can be added as part of integration design and their behavior when you include them. Note that elements lists should be send based on the type of BP for which you are creating a record.

Tag Name	BP Type	Description
<amount>	Cost	Amount is a required field if you are sending line item information under _bp_lineitems. You will see same value on Unifier.
<record_no>	Any	You can send record number by using this tag. If you do not specify a record_no tag as part of message then a new record will be created with the line item information that is provided as part of ItemXML If you specify a record_no then system will add new line item(s) based on the data provided as part of ItemXML If the record_no is specified and if it does not exists then a new record will be created with the line item information that is provided as part of ItemXML.

Tag Name	BP Type	Description
<status>	Any	You can send record status by using this tag. This tag is valid only for multi-record BPs. If the record_no is specified and if it does not exists then a new record will be created with the line item information that is provided as part of ItemXML. If the BP is a workflow based then the record will be created and will be created and will stay in the initial status that is valid. User has to go through remaining workflow process. If it is a non-workflow based then the message can send a valid status and the record will take that status. If there is only one status defined for the BP then by default that status will be picked even if user sends a wrong status value.
attachment	Any	Multiple attachment elements can be added to the upper form and to line items (if applicable). The attachment element contains sub elements that identify: ▸ File name ▸ Title ▸ Revision Number ▸ Issue Date ▸ Version ▸ Reference

Tag Name	BP Type	Description
<li_group_name>	All BPs that support Summary line items other than Summary Payment Application BPs of Base Commit, Change Commit and Payment Applications.	Use to specify group name.

Return Value

See ***Appendix A: Return Values*** (on page 831).

Add Complete BP Line Item (Additional Information)

Figure 58: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

This topic includes additional information about adding complete BP line items.

Interface

This interface can be extended with additional data elements. In order for Unifier to recognize those elements, the data element name has to match those created in uDesigner for this business process.

YTB/AFC

If the tags YTB or AFC are present in the line items, Unifier processes these tags. If they are not present, Unifier will check the uDesigner BP setup configuration for Cost Adjustment. If this field has been set, the line item amount is treated as YTB/AFC and processed.

To add a line item to company level BP record then send null for projectNumber parameter. If you send a project number for a BP that is at Company level then you will get an error that BP name is not correct.

Attachments

Attachments can be added to line items.

Files can be sent as a single zipped file or individual files for the complete transaction record, the same file can be referenced multiple times in the same transaction. However, files contained in the zip file should still be described by separate attachment elements.

API

This API requires Integration Design to be published in uDesigner for the business process.

Attachment elements specified as part of upper form data will be ignored by this API.

Attachment file cross references is not supported. The reference sub element under attachments should always have the value ‘No'.

Adding attachments is optional. If attachment elements are not provided, then the API behaves exactly like addBPLineItem API.

> **Note:** This API is not compatible with non Java web services client platforms.

Total attachment size per request across all files is limited to 250 MB. It is recommended that files are compressed into 1 zip file for submission to the API.

This service can be used for Projects/Shells of cost code type CBS and Generic.

The following XML tag <_refnum> </refnum> should be added under BP line item tag <_bp_lineitem> </bp_lineitem> to support the ability to import the line items for General Spends and Payment Applications.

This service can be used to add lines to Payment Applications and General Spends type of business process. When adding lines to Payment Applications type of business process, existing lines if any will be removed and new lines will be added that are provided as part of the service call. For General spends line will be appended like any other business process.

Adding Complete BP Line Item for Document type BP with Folder Structure

You can add additional line items (including a document) into a particular folder in the Document Type BP with folder structure for an existing, or new, BP record.

- The tag <folder_path> specifies the path of the folder for the line item. This tag exists in the current input XML for Document Type BP with folder structure.
- The folder path (<folder_path>) contains the names of the folders.
  - If the folders mentioned in the folder path do not exist, the folders are created and the line items are added to the last folder mentioned in the folder path.
  - If the folder names exist, the line items are created under the last folder mentioned in the path.
- The Input integration XML contains the tags, as part of bp_lineitems elements.
- The syntax of the entry for the <folder_path> field is: “/<Folder Name1>/”
- If you create the line items under the root node, the valid inputs within the tag are either “/” or blank.
- If the folder path is blank, the line item is created at the root node “Attachments” and the folder name will be “Attachments”.
- If the line items have attachments in the <_attachment> elements, the line items are added to the respective folder.

When the folders are being created through Web Services, the validations (in web interface of Unifier) are completed during the naming of the folders. You can enter non-ASCII characters as folder names. For example, you can enter Chinese characters as folder names in the folder path.

Behavior Specific to Summary Payment Application SOV Type BPs

> **Note**: The information is applicable to Base Commit, Change Commit, and Payment Application Business Processes of Summary Payment

Application SOV Type BPs.

For more details about XML tags, see Create and Add Methods in the ***Create BP Record (Additional Information)*** (on page 102) section.

Note: You can use this method to add line items to a BP record that does not have any line items. If a record already has the SOV line items that existed at the time of the record creation, then new line items cannot be added. If the call is started, then the system generates an error message.

Update BP Record

Figure 59: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method updates a record in Unifier.

Support

This service is available at both Company Level and Project or Shell Level BPs of type non-workflow Line Item type and can only update information on upper form. Line items will be ignored. Additionally the service is also available at Project or Shell Level for Cost (Non-Payment type), Simple, Text type and Document Type (Basic and Advanced) business process. In these cases, too, the service can only update information on upper form. Line items will be ignored.

Installation

ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	Yes

Prototype

public XMLObject updateBPRecord(String shortname, String authcode, String projectNumber, String BPName, String BPXML);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name

Authcode	authentication key for the company, in text string
projectNumber	Identifier of the project or shell.
BPName	Identifier of the BP
BPXML	Content of the BP that needs to be updated

BPXML Elements

The BPXML Elements are based on BP design. So in order to use this method user has to first use getBPRecord service. getBPRecord service will provide user with valid XML elements that are part of BP design.

If you want to update record for a BP at company level then do not pass projectnumber parameter.

If you send invalid projectnumber then you will get an error.

<record_no> tag as part of <_bp> element is required while send updateBPRecord message.

This service can be used for Projects/Shells of cost code type CBS and Generic.

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

updateBPRecord("acme", "acme_authcode", "Proj-0001", "Blanket PO", "<XML Content>")

Update BP Record (Additional Information)

Figure 60: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Behavior Specific to Summary Payment Application SOV Type BPs

The information is applicable to Base Commit, Change Commit, and Payment Application Business Processes of Summary Payment Application SOV Type BPs.

For more details about XML tags, see the Create and Add Methods topic in the ***Create BP Record (Additional Information)*** (on page 102) section.

The "Enable Step for Integration" option in the Workflow BP setup is not available for the REST integration.

Update Complete BP Record

Figure 61: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method updates a record in Unifier. It also provides the ability to add attachments to the upper form. It will not delete existing attachments.

Support

This service is available at both Company Level and Project or Shell Level BPs of type non-workflow Line Item type and can only update information on upper form. Line items will be ignored. Additionally the service is also available at Project or Shell Level for Cost (Non-Payment type), Simple, Text type and Document Type (Basic and Advanced) business process. In these cases, too, the service can only update information on upper form. Line items will be ignored.

Installation

ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	Yes

Prototype

public XMLObject updateCompleteBPRecord(String shortname, String authcode, string projectNumber, String BPName, String BPXML, String iszipfile, FileObject[] fileobjects);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
Authcode	authentication key for the company, in text string
projectNumber	Identifier of the project or shell in Unifier.
BPName	Identifier of the BP
BPXML	Content of the BP that needs to be updated
iszipfile	This tag identifies if the file provided under the fileobjects tag is a zip file or not. Values for this tag are "yes" or "no".

fileobjects	Array of FileObjects, each FileObject is made up of two components: String filename (this should be the same name as in the record data <_attachment><filename> tag, and javax.activation.DataHandler as filestream. Files can be sent as a single zipped file or individual files..

BPXML Elements

The BPXML Elements are based on BP design. So in order to use this method user has to first use getBPRecord service. getBPRecord service will provide user with valid XML elements that are part of BP design.

If you want to update record for a BP at company level then do not pass projectnumber parameter.

If you send invalid projectnumber then you will get an error.

<record_no> tag as part of <_bp> element is required while send updateBPRecord message.

Attachments can be added only to the upper form.

Files can be sent as a single zipped file or individual files for the complete transaction record, the same file can be referenced multiple times in the same transaction. However, files contained in the zip file should still be described by separate attachment elements.

API

This API requires Integration Design to be published in uDesigner for the business process.

Attachment file cross references is not supported. The reference sub element under attachments should always have the value ‘No'.

Adding attachments is optional. If attachment elements are not provided, then the API behaves exactly like updateBPRecord API.

> **Note:** This API is not compatible with non Java web services client platforms.

Total attachment size per request across all files is limited to 250 MB. It is recommended that files are compressed into 1 zip file for submission to the API.

This service can be used for Projects/Shells of cost code type CBS and Generic.

Return Value

See ***Appendix A: Return Values*** (on page 831).

Update Complete BP Record (Additional Information)

Figure 62: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Updating Complete BP Record for Document type BP with Folder Structure

The existing Web Services call updates the Upper form elements and you can add attachments to the Upper form.

> **Note**: The Document type BP with folder structure does not have record-level attachments.

Behavior Specific to Summary Payment Application SOV Type BPs

> **Note**: The information is applicable to Base Commit, Change Commit, and Payment Application Business Processes of Summary Payment Application SOV Type BPs.

For more details about XML tags, see Create and Add Methods in the ***Create BP Record (Additional Information)*** (on page 102) section.

Update BP Record V2

Figure 63: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This option will allow external systems to update a business process record and advance it to next step.

Support

This service is available at both Company Level and Project or Shell Level BPs of type non-workflow Line Item type and can only update information on upper form. Additionally, the service is also available at Project or Shell Level for Cost (Non-Payment type), Simple, Text type and Document Type (Basic and Advanced) business process. In these cases, too, the service can only update information on upper form.

> **Note**: By design, there are no web services available for the Request for Bid (RFB) business process.

Installation

ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	Yes

Prototype

public XMLObject updateBPRecordV2(String shortname, String authcode, String shellNumber, String BPName, String BPXML, String options).

Parameters

Parameter	Description
Shortname	identifier of the company, company's short name
Authcode	authentication key for the company, in text string
shellNumber	Identifier of the project or shell.
BPName	Identifier of the BP
BPXML	Content of the BP that needs to be updated and moved to next step.
Options	This tag will allow user to send additional information related to workflow and line items. Following are the tags under options tag and their description ▸ LineItemIdentifier: Name of the DE on the detail form / line item to uniquely identify line items. ▸ WFCurrentStepName: Name of the current workflow setup ▸ WFActionName: Action that should be taken to move the WF to next step ▸ SYS Auto Sequence type DE

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

updateBPRecordV2("acme", "acme_authcode", "PRJ-0001", "Contracts", <XML content>,<options>)

Update BP Record V2 (Additional Information)

Figure 64: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

This topic includes additional information about updating BP record V2.

> **Note**: The "Enable Step for Integration" option in the Workflow BP setup is not available for the REST integration.

Simple Object Access Protocol (SOAP)

To send SOAP services as XML, ensure that you follow the general rules of XML:

- All tag data (not CDATA) needs to be escaped for < > & "
- Escaping must be a part of the client code which generates the web service call

> **Note**: Those using SOAPUI to make a call must do it manually.

Unifier supports MTOM base64 encoded files in our Unifier Web Service SOAP platform for:

- createCompleteBPRecord
- updateCompleteBPRecord
- addCompleteBPRecord
- getCompleteBPRecord

> **Note**: By design, there are no web services available for the Request for Bid (RFB) business process.

Shell and Company Levels

If the Shell number is null then the record will be assumed for company level record.

The step involved in sending a record (Send To) is pre-assigned.

Options

- **WFCurrentStepName**

  Value of this tag identifies the current step of the record. This is to ensure that web service call is called for correct step with correct action.

- **WFActionName**

  Value of this tag determines the action that should be taken. This action name will be validated against the WFCurrentStepName

WFActionName

If the option WFActionName tag is empty, the system only updates the record. WFCurrentStepName in this case is not validated.

If the option WFActionName tag has a value, then the system pushes workflow to the next step, based on the value of WFActionName tag. All form level validations will be triggered before pushing workflow to the next step. In this scenario WFCurrentStepName will be validated to make sure that the step is valid and action is valid. The option WFActionName tag will be ignored for non-workflow business processes.

Validations while processing WFCurrentStepName and WFActionName tags

- If WFActionName tag *is empty*, then do not validate WFCurrentStepName
- If WFActionName tag *is not empty*, then validate WFCurrentStepName

WFCurrentStepName

The record is still on the step identified by WFCurrentStepName. If it is not, the system generates an error.

Step identified by WFCurrentStepName value has "Enable Step for Integration" option set to "Yes". If it is not, the system generates an error. The "Enable Step for Integration" option is specific to SOAP.

Validate WFActionName is valid action that can be taken from step identified by the value of WFCurrentStepName.

After going through all validations rules, the system moves the record to next step. The Creator, who has been selected on the Admin > BP Setup > Workflow (node) > Auto Creation (tab) > Creator, is the person who takes action on the step.

It is possible that someone would have accepted the task on step identified by the value of WFCurrentStepName. (This can happen because "Assignees" option for this step under BP Setup is not disabled). There are three possible scenarios under this condition:

- No one accepted the task: In this scenario system will automatically accepts the task, update record and line items and move record to next step. System will remove task from all other users list.
- Someone accepted the task: In this scenario system will update record and move it to next step and will remove task from other users list including the use who accepted the task.
- Someone accepted the task and move workflow to next step. System will generate an error message as the task is already accepted and WF is moved out of that step

LineItemIdentifier

There are two scenarios for this option:

a. LineItemIdentifier value is empty: In this scenario system will add all line items. <_delete_bp_lineitems> tag will be ignored.

b. LineItemIdentifier value is not empty: In this scenario value provided as part of LineItemIdentifier should be a tag under _bp_lineitems. If not system will error out.

If LineItemIdentifier value is an element under _bp_lineitems, then the system will try to query up a line item based on the value provided under this element.

If the line is found then it will be updated.

If two lines are found, then the system generates an error (duplicate rows).

If the line is not found, then it will be added.

Notes:

- The mentioned behavior mentioned above is applicable to all lines on all tabs.
- The system will not update/remove/add line items of Cost type of Business Process records that have reached terminal status (not just end step), using this new service.

The "LineItemIdentifier" option is ignored for following type of business processes:

- Simple: Document with Detail form
- Text

WFActionName and **WFCurrentStepName**

This option is ignored for non-workflow Business Processes.

Import the line items for General Spends and Payment Applications

The following XML tag <_refnum> </refnum> should be added under BP line item tag <_bp_lineitem> </bp_lineitem> to support the ability to import the line items for General Spends and Payment Applications.

This service can be used to add lines to Payment Applications and General Spends type of business process. When adding lines to Payment Applications type of business process, existing lines if any will be removed and new lines will be added that are provided as part of the service call. For General spends line will be appended like any other business process.

Note: *updateBPRecordv2* cannot be used to update existing line items for Payment Applications type of business process.

Updating BP Record V2 for Document type BP with Folder Structure

The Web Service call supports the adding of line items to a specific folder to an existing Document type BP record.

The **Update BP Record V2** is applicable to Base Commit and Change Commit of *Summary Payment Application* type business processes.

The **Update BP Record V2** is partially supported for Payment Application business processes of Summary Payment Application type. Use this service to add standard tab line items to a payment record only when the record does not have any standard tab line items created, yet (in such case, the same service can also be used to optionally progress the workflow). Alternately, this service can be used only to progress the workflow on a record.

This service is not available to modify or delete standard tab line items.

Payment BP (both the classic and summary payment) line items belonging to tabs other than the standard tab can be added/modified/deleted by using: updatebprecordv2 call.

Behavior Specific to Summary Payment Application SOV Type BPs

> **Note**: The information is applicable to Base Commit and Change Commit of Summary Payment Application SOV Type BPs.

For more details about XML tags, see Create and Add Methods in the ***Create BP Record (Additional Information)*** (on page 102) section.

Update Methods (Update BP Record V2)

The Cost Allocation using the Update BP Record V2 method is necessary when Summary Line Item is added at the creation step and Actual Cost Allocation is added in the subsequent step.

When you need to add Cost Allocation to an existing Line Item, the existing "LineItemIdentifier" tag can hold the information of the Line Item that needs to be updated with the Cost Allocation

The LineItemIdentifier is the key tag for identifying the Line Item that needs to be updated.

You can add new Summary Line Items and Costed Line Items.

If the XML template has the Summary Line Item fields, along with the Cost Allocation, then the Summary Line Items need to be updated.

> **Note**: In this case, the LineItemIdentifier tag is the key.

For modifying Line Items, either by adding new Costed Line Items or updating existing Costed Line Items for Base Commit and Change Commit Business Process records, the following rules are applied:

- CBS Code forms the identifier for identifying the Costed Line Items that need to be updated in Base Commit BPs.
- For a Base Commit BP record:
  - If a CBS Code that is specified in the _cost_allocation block does not exist in the Line Item, this will be treated as a new Costed Line Item for the specified Line Item.
  - If the CBS Code specified in the _cost_allocation block exists, this will be treated as an update and the Costed Line Item for the specified Line Item will be updated.
  - If there are multiple Cost Allocation blocks with the same CBS Codes, the update will not take place and results in a duplicate CBS Code error.

> **Note**: The above rule also applies to updating the existing Line Items in the Change Commit BP.

New modifications to Line Items existing in the SOV can be done by specifying the sovlinum. For modifying the Costed Line Items in the Summary Line Items, the combination of sovlinum and CBS Code will be used.

Since the Short Description exists for the Line Items, this is as an Optional field.

The Costed Line Items that need to be updated will be identified by the Cost Code/ bItemId.

All operations that are currently possible with the updateBPRecordV2 call will also be applicable here.

Example

Workflow progress, deletion of line items, and so on

Validation

If the input XML used for updating Line Items has only Cost Allocation details, along with the Line Item reference, then the Line Items update with the Cost Allocation will go through without any errors.

All validations for the required fields in the Summary level and the Cost Allocation level will be applicable.

All system level validations existing for the above mentioned BPs will be applicable.

Example

Costed amount = Line item amount at a given step

Existing validations for update BP record V2 will be applicable.

Data Elements in Line Items

If the following Data Elements are present in the Line Items, they will not be updated.

- `bitemid`
- `budgetid`
- `sovitemid`
- `uuu_cm0_picker`
- `xid`
- `ds_code`
- `fsm_lineitem_id`
- `asm_lineitem_id`
- `uuu_lat`
- `uuu_long`
- `uuu_company_account_name`
- `uuu_company_account_code`
- `uuu_company_acc_codepicker`
- `uuu_activity_picker`
- `uuu_asset_picker`
- `ref_bpo_lineitem`
- `ref_bpo`
- `ref_rfb`
- `refid`
- `uuu_sovlinum`
- `otherCompanyID`
- `uuu_costcode_picker`
- `scheduled_value`
- `uuu_asset_cum_depreciation`
- `uuu_asset_curr_period_dep`
- `uuu_asset_net_book_value`

- uuu_unit_price
- currencyid
- due_date
- uuu_asset_calc_as_of_date
- uuu_from_date
- uuu_issue_date
- uuu_last_update_date
- uuu_rfb_due_date
- uuu_to_date
- uuu_week_picker
- uuu_datasource
- uuu_depreciation_mtd
- uuu_line_item_status
- row_id
- uuu_bid_count
- uuu_bidders_count
- uuu_planning_item_picker
- uuu_proj_picker
- record_no
- uuu_resc_picker
- uuu_role_picker
- uuu_commit_short_desc
- end_date
- uuu_creation_date
- uuu_asset_name
- uuu_commit_breakdown
- uuu_asset_code
- uuu_asset_navigation_code
- uuu_timescale_units
- creator_id
- wpid
- uuu_cost_costattribute
- uuu_cost_external_refid
- uuu_cost_status
- uuu_cost_cost_type
- uuu_cost_description
- uuu_cost_item
- uuu_cost_owner
- uuu_cost_code
- uuu_dm_create_date

- uuu_file_create_date
- uuu_file_issue_date
- uuu_dm_percent_complete
- uuu_file_size
- uuu_file_version
- uuu_dm_description
- uuu_dm_node_path
- uuu_dm_node_name
- uuu_file_revision_no
- uuu_file_title
- uuu_dm_create_by
- uuu_file_create_by
- uuu_fund_fundcategory
- uuu_fund_long_desc
- uuu_fund_description
- uuu_fund_fundname
- uuu_fund_code
- uuu_description
- uuu_resc_nwd_type
- uuu_resc_interest
- uuu_resc_proficiency
- uuu_resc_skill
- uuu_role_status
- uuu_role_name
- uuu_resc_capacity
- uuu_user_address
- uuu_user_city
- uuu_user_country
- uuu_user_email
- uuu_user_fax
- uuu_user_firstname
- uuu_user_homephone
- uuu_user_lastname
- uuu_user_mobilephone
- uuu_user_pager
- uuu_user_state
- uuu_user_timezone
- uuu_user_title
- uuu_user_workphone
- uuu_user_zip

- uuu_resc_status
- uuu_resc_code
- uuu_resc_name
- uuu_early_finish
- uuu_early_start,uuu_finish
- uuu_late_finish
- uuu_late_start
- uuu_start
- uuu_act_pct_complete
- uuu_activity_work_hrs
- uuu_duration
- uuu_fixed_cost
- uuu_float
- uuu_labor_cost
- uuu_non_labor_cost
- uuu_total_cost
- uuu_activity_id
- uuu_flag_complete
- uuu_flag_milestone
- uuu_activity_resources
- uuu_dependency_type
- uuu_activity_name
- uuu_outline_code
- uuu_cost_li_type

Get BP Record

Figure 65: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method gets a specific Business Process record in Unifier based on Integration design that has been defined in uDesigner. For more information, refer to the *Unifier uDesigner User Guide*. This method works for both company level and project or shell level BPs.

Support

This process supports all type of BPs.

Installation

ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	Yes

Prototype

public XMLObject getBPRecord(String shortname, String authcode, string projectNumber, String BPName, String recordNumber);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
authcode	authentication key for the company, in text string
projectNumber	Identifier of the project or shell. Pass null for Company Level BP
BPName	identifier of the business process, for example: Invoice
recordNumber	identifier of the business process example: inv-0001

Return Value

See ***Appendix A: Return Values*** (on page 831).

For Text BPs, the contents of the <_comment> tag, which contains the response list (comments), is also returned.

Sample Method

getBPRecord("acme", "acme_authcode", "proj-01", "Invoice","innv-0001") will return the XML Record of the BP.

Get BP Record (Additional Information)

Figure 66: Support for SOAP is deprecated starting with Unifier 23.10.

This topic includes additional information about getting a BP record.

Use the <li_group_name> tag to specify group names. This tag is applicable to all BPs that support Summary line items other than Summary Payment Application BPs of Base Commit, Change Commit and Payment Applications.

recordNumber

If the recordNumber is left blank or invalid recordNumber then the method will returns the BP's skeletal XML. BP template can also be downloaded from uDesigner.

To get company level BP record information, send null for projectNumber parameter. If you send a project number for a BP that is at Company level then you will get an error that BP name is not correct.

To get Single Record BP you need a record number populated on the record. If you do not have a record number populated then getBPRecord will return back the structure of the BP.

If you getting information for a Cost Type BP then you will always get <bItemID> and <fund_code> elements as part of return XML.

This service can be used for Projects/Shells of cost code type CBS and Generic.

Behavior Specific to Summary Payment Application SOV Type BPs

> **Note**: The information is applicable to Base Commit, Change Commit, and Payment Application Business Processes of Summary Payment Application SOV Type BPs.

When this method is used for the above mentioned BPs, the response file will contain Cost Allocation details for various Line Items.

Get BP List

Figure 67: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method gets all the records for a specific Business Process in Unifier based on Integration design that has been defined in uDesigner. For more information, see **uDesigner Overview** in the *Unifier General Administration Guide*.

Support

This process supports all type of BPs.

Installation

ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	Yes

Prototype

public XMLObject getBPList (String shortname, String authcode, string projectNumber, String BPName, String[] fieldnames, String filterCondition, String[] filterValues);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
authcode	authentication key for the company, in text string
projectNumber	identifier of the project or shell
BPName	identifier of the business process, for example: Invoice
fieldnames	names of the elements in the BP that you want to retrieve; this is an optional parameter. If not specified, all elements will be returned. Currently this parameter is not supported through Web services.
filterCondition	a list of supported condition, this is an optional parameter. If not specified, no conditions will be applied. Field names that you enter as filterCondition should match with the elements that you have selected while designing Integration Interface in uDesigner.
filterValues	a list of values depending on the filter conditions. Currently this parameter is not supported through Web services.

fieldnames

Values that you are going to send through fieldnames parameter are dependent on your BP design. Only those filed can send through fieldnames that are part of your BP design. You can send a name from line item list.

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

getBPList("acme", "acme_authcode", "proj-01", "Invoice",null,null,null) will return the XML List of all the Records of the BP Invoice.

```
<gen:getBPList>
```

```
<!--Optional:-->
  <gen:shortname>4C</gen:shortname>
  <!--Optional:-->
  <gen:authcode>123</gen:authcode>
  <!--Optional:-->
  <gen:projectNumber></gen:projectNumber>
  <!--Optional:-->
  <gen:BPName>Vendors</gen:BPName>
  <!--Zero or more repetitions:-->
  <gen:fieldnames></gen:fieldnames>
  <!--Optional:-->
  <gen:filterCondition></gen:filterCondition>
  <!--Zero or more repetitions:-->
  <gen:filtervalues>showlineitems=yes</gen:filtervalues>
```

Or: `<gen:filtervalues>showlineitems=`**no**`</gen:filtervalues>` for only Upper form details.

```
</gen:getBPList>
```

Get BP List (Additional Information)

Figure 68: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

This topic includes additional information about getting a BP list.

Company-level BP Record

To get company level BP record information, do not send projectNumber parameter. If you send project number and the BP exists at company level then you will get an error that BP name is not correct.

Single Record BP

To get Single Record BP you need a record number populated on to the record. If you do not have a record number populated then getBPRecord will return back the structure of the BP.

filterCondition

If you cannot send filterCondition and filter values currently then it is recommended that these be set to "null." If you want to filter out the records that you want to retrieve then you can use this element. If you want to include more than one filter condition then following this syntax

<_filterCondition>fieldname=value && fieldname=value<_filterCondition>

You can add custom field clause through filters.

Example

end_date=04-13-2005, & record_no=uas-1200

If condition value is string (for example, ABC Inc), the value should be entered as follows <_filterCondition>Vendor Name='ABC Inc'</_filterCondition>. Observe that the value has single quotes. Only equal to "=" operation is supported.

> **Note:** If errors are present when evaluating the basic filter condition system will ignore it, but if there are errors in custom filter condition field names and values, system will return an empty list. All condition fields are evaluated using AND. If the combination has only basic fields and it has an error in processing all the records will be returned.

filterNames

The Filter name will contain list of elements that you want to see as part of output XML. For example, if you want to see project name and project number as output, include projectname and projectnumber.

filterValues, and filterNames are *not supported* as part of Web services for this release.

This service can be used for Projects/Shells of cost code type CBS and Generic.

li_group_name

Use the <li_group_name> tag to specify group names. This tag is applicable to all BPs that support Summary line items other than Summary Payment Application BPs of Base Commit, Change Commit and Payment Applications.

Behavior Specific to Summary Payment Application SOV Type BPs

> **Note**: The information is applicable to Base Commit, Change Commit, and Payment Application Business Processes of Summary Payment Application SOV Type BPs.

When this method is used for the above mentioned BPs, the response file will contain Cost Allocation details for various Line Items.

Get Complete BP Record

Figure 69: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

Methods returns back complete BP record information. This includes any attachments, general comments, and so on.

Support

This service is available at both Company Level and Project and Shell Level BPs

> **Note**: By design, there are no web services available for the Request for Bid (RFB) business process.

Installation

ASP and Self host

Level	Yes or No
Company Level	Yes
Project and Shell Level	Yes

Prototype

public XMLObject getCompleteBPRecord(String shortname, String authcode, String projectNumber, String BPName, String record_no);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
Authcode	authentication key for the company, in text string
projectNumber	Identifier of the project or shell.
BPName	Identifier of the BP
record_no	A valid record number.

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

getCompleteBPRecord("acme", "acme_authcode", "Proj-0001", "Invoices", "Inv-0001")

Get Complete BP Record (Additional Information)

Figure 70: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

This topic includes additional information about getting a complete BP record.

Use the <li_group_name> tag to specify group names. This tag is applicable to all BPs that support Summary line items other than Summary Payment Application BPs of Base Commit, Change Commit and Payment Applications.

Company-Level BP Record

If you want to get company level BP record information then pass null for projectnumber element.

You will get a zip file as an output. The zip file contains any attachments and a PDF file that contains BP record information.

<record_no> tag as part of <_bp> element is required while send getCompleteBPRecord message.

This service can be used for Projects/Shells of cost code type CBS and Generic.

> **Note**: By design, there are no web services available for the Request for Bid (RFB) business process.

Getting Complete BP Record for Document type BP with Folder Structure

The existing Get Complete BP record displays the <folder_path> in <bp_lineitems> elements and <attachments_folder> elements. The folder path seen in the line items elements matches the folder path seen in the <attachments_folder>. The <folder_name> is displayed with the <folder_path> in the <attachments_folder> section.

Behavior Specific to Summary Payment Application SOV Type BPs

> **Note**: The information is applicable to Base Commit, Change Commit, and Payment Application Business Processes of Summary Payment Application SOV Type BPs.

When this method is used for the above mentioned BPs, the response file will contain Cost Allocation details for various Line Items.

CBS Code Methods

Figure 71: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

This section covers the following:

- Get CBS Structure
- Create CBS Code
- Get CBS Codes
- Update CBS Codes

> **Note**: The Cost Breakdown Structure (CBS) methods have replaced the Work Breakdown Structure (WBS) methods; however, for legacy

purposes the initials "WBS" have remained as is (for example, *WBS*XML in the Create CBS Code method is the identifier used for the CBS creation XML format).

Get CBS Structure

Figure 72: Support for SOAP is deprecated starting with Unifier 23.10.

Description

This method gets CBS Structure in Unifier for a company.

Support

This service is available at Company Level

Level	Yes or No
Company Level	Yes
Project and Shell Level	No

Prototype

Public XMLObject getWBSStructure(String shortname, String authcode);

Parameters

Parameter	Description
Shortname	identifier of the company, company's short name
Authcode	authentication key for the company, in text string

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

getWBSStructure ("acme", "acme_authcode")

Create CBS Code

Figure 73: Support for SOAP is deprecated starting with Unifier 23.10.

Description

This method creates CBS code under Project or Shell (cost code type as CBS) cost sheet.

Prototype

Public XMLObject createWBS(String shortname,String authcode, string projectNumber, String WBSXML);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
authcode	authentication key for the company, in text string
projectNumber	identifier of the project or a shell
WBSXML	identifier used for CBS creation XML format

WBSXML Elements

The following is a list of elements that are supported while creating CBS code. Any other codes that are defined as part of Cost Attribute form will be supported except User and BP Picker

Parameter	Description
<status>	Status is not a required tag when you are sending createWBS message. But if you include this tag then following are the valid values Active: Code will be created with Active status Inactive: Code will be created with Inactive status If you do not send this tag then code will be created without any status which is equivalent to Inactive status.
<cost_type>	This is not a required tag when you are sending createWBS message. But if you include this tag then following are the valid values Capital: To create CBS of type Capital Expense: To create CBS of type Expense If you do not send this tag then code will be created with Capital as Cost Type.

Parameter	Description
<costattribute>	This is not a required tag when you are sending createWBS message. But if you include this tag then send data that is defined as values under Cost Attribute data definition.

Return Value

See ***Appendix A: Return Values*** (on page 831).

Additional Information

You can create CBS Code with a Tree Structure.

getWBSStructure

Use getWBSStructure service to get the CBS attribute structure. The retrieved structure can be used to create new CBS codes. User can define a Cost Attribute form in uDesigner. In order to send XML message to create new Cost codes user has to send data using schema that is generated as output from getCBSStrucutre service.

If the Project or Shell CBS structure is in tree mode, or a parent / child relationship is required, the CBS code passed via the integration interface must concatenate the parent CBS code and child CBS code with "~~" as the delimiter.

If you have multilevel parent child relationship then you have to pass in "~~" as delimiter at all levels to separate parent and child.

Parent will be automatically created when you create child.

CBS Item element will take value of Description element.

This service will only work for Shells with Cost Code: CBS

Get CBS Codes

Figure 74: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method gets the CBS Codes in Unifier for a particular project or shell.

Support

This service is available at Project/Shell

Level	Yes or No
Company Level	No

Level	Yes or No
Project and Shell Level	Yes

Prototype

Public XMLObject getWBSCodes(String shortname, String authcode, String projectnumber, String options);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
authcode	authentication key for the company, in text string
projectnumber	Identifier of the project or shell.
options	Three options are available: <status>: can be set to active or inactive. If status is blank or not provided it will return all status. <cost_type>: can be set to capital or expense. If cost_type is blank or not provided it will return all cost types. <summary_detail> : can be set to true or false. Setting to true, leaving blank or not providing the value will return all summaries and detail CBS codes. Setting to false will return on the detail CBS codes with no summaries.

Return Value

See ***Appendix A: Return Values*** (on page 831).

Sample Method

getWBSCodes ("acme", "acme_authcode", "P-00001" status=active)

Update CBS Codes

Figure 75: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method updates CBS code under Project or Shell (cost code type as CBS) cost sheet. The updateWBS allows existing CBS attributes to be changed. All user-defined and system-attributes are available to be modified. The CBS Code cannot be edited.

Support

This service is available for Project/Shell.

Prototype

Public XMLObject updateWBS(String shortname,String authcode, string projectNumber, String WBSXML);

Parameters

Parameter	Description
shortname	identifier of the company, company's short name
authcode	authentication key for the company, in text string
projectNumber	identifier of the project or a shell
WBSXML	identifier used for CBS update XML format

Return Value

See ***Appendix A: Return Values*** (on page 831).

Additional Information

You can update CBS Code with a Tree Structure.

getWBSStructure

Users will be able to update CBS codes with tree structure.

Use getWBSStructure service to get the CBS attribute structure. The retrieved structure can be used to update CBS codes; however, the retrieved structure XML is needed to be wrapped as follows:

```
<![CDATA[
<List_Wrapper>  <!-- List Wrapper Added -->
<_bp_wbscode>
  <wbs_code></wbs_code>
  <wbs_item></wbs_item>
  <description></description>
  <costattribute></costattribute>
  <external_refid></external_refid>
  <owner></owner>
  <status></status>
  <cost_type></cost_type>
  <exposed_to_p6></exposed_to_p6>
</_bp_wbscode>
</List_Wrapper> <!-- List Wrapper Closed-->
]]>
```

User can define a Cost Attribute form in uDesigner. In order to send XML message to update Cost codes user has to send data using schema that is generated as output from getWBSStrucutre service.

If the Project or Shell CBS structure is in tree mode, or a parent / child relationship is required, the CBS code passed via the integration interface must concatenate the parent CBS code and child CBS code with "~~" as the delimiter.

If you have multilevel parent child relationship then you have to pass in "~~" as delimiter at all levels to separate parent and child.

This service will only work for projects/shells with a CBS Cost Code.

Sort Cost Sheet

Figure 76: Support for SOAP is deprecated starting with Unifier 23.10.

DEPRECATED

Description

This method sorts the project Cost Sheet on CBS code.

Support

This method only supports sorting of CBS code for Project/Shell.

Level	Yes or No
Company Level	No
Project Level and Shell Level	Yes

Prototype

Public XMLObject sortCostSheet (String shortname, String authcode, String projectNumber, String type, String sortOrder);

Parameters

The following is a list of parameters.

Parameter	Description
shortname	identifier of the company, company's short name
authcode	authentication key for the company, in text string
projectNumber	identifier of the project or a shell

The following is a list of optional parameters.

Parameter	Description
type	Identifier for the column (the column that the sorting must happen). The only supported value is: CBS. This is an optional parameter, and if the parameter is not present the project Cost Sheet will be sorted based on CBS codes.
sortOrder	Identifier to define the sort order (ascending or descending). The values are: 'asc' or 'desc'. This is an optional input parameter. By default, the sort order is ascending.

Return Value

The Return values for this service are:

Code	Description
200	Ok
602	Project/Shell Number is not correct.
605	No Budget set up for the project.
500	Server Error, contact the system administrator.
1059	The type name does not match the column name from cost sheet.
1060	Invalid sort order. You must provide a value for either 'asc' or 'desc'.

Sample Method

sortCostSheet ("acme", "acme_authcode", “CBS","desc");

Additional Information

The following are the rules for sorting:

- For a flat structured Project Cost Sheet, there will be a simple alphanumeric sort on all the segment codes. The sorting will be case insensitive.
- For a tree structured Cost Sheet, the level sorting will happen first (the parent level first followed by the child level). Further alphanumeric sorting will happen within the level. The sorting will be case insensitive.

> **Note**: The user must not perform any action on the project Cost Sheet when `sortCostSheet webservice` is running.

Accessing Representational State Transfer (REST) Services V1 and V2

The following types of authentications are supported for REST APIs (V1 and V2):

- Basic
- OAuth

Depending on the authentication, a token is generated using an end-point URL.

This chapter describes how to obtain a token to authenticate yourself for using REST services.

For basic authentication, see ***Setting Up Integration Users with Basic Authentication*** (on page 153).

For Oauth authentication, see ***Setting Up Integration Users with OAuth Authentication*** (on page 157).

> **Note**: If the endpoint URL has a project number that contains special characters such as / \ : * ? " < > or |, you must change those special characters to URL escape characters. For example, A project number with a special number sign (hash) such as 2020#7 must be changed to 2020%7. You can use a browser to access the list of URL escape characters.

In This Section

Setting Up Integration Users with Basic Authentication 153
Setting Up Integration Users with OAuth Authentication 157

Setting Up Integration Users with Basic Authentication

To set up integration users with basic authentication for V1 and V2 REST APIs:

1) Create an integration user at **Company Workspace > User Administration > Integration User**.
2) Enable appropriate module permissions for the integration user.

To fetch a token for users with basic authentication for V1 REST Service, use the ***V1 Get Token REST Service for Basic Authentication*** (on page 154)

To fetch a token for users with basic authentication for V2 REST Service, use the ***V2 Get Token REST Service for Basic Authentication*** (on page 155).

V1 Get Token REST Service for Basic Authentication

GET http://<host>:<port./ws/rest/service/v1/login

Prerequisite

Your user integration status must be set to *Active*.

Purpose

Use this REST service to generate an authentication token to access V1 REST services.You can set the token expiration from the integration user interface in terms of days, hours, and minutes. The validity of the token in terms of date and time is displayed in the response.

Valid values for expiry duration is 1 through 500. By default the expiry duration is set to 180 days.

Instructions For Using Any Generic REST Client

To generate a token using any generic rest client:

1) In the **Authorization** tab, select *Basic Authentication* **Type**.
2) Enter your user name and password.
3) Click **Update Request** to generate the necessary Authorization header in the **Headers** tab.

Response Format

Headers -Authorization:Basic <*Basic Auth of integration user*>

Sample Response

This is an example of a successful response.

```
{
     "expiryDate": "05/18/2021",
     "Timezone": "(UTC-08:00) Pacific Time (US & Canada)",
     "expiryTime": "05/18/2021 11:44 AM",
     "status": 200,
     "token":
"eyJ0eXAiOiJEQiJ9.eyJ1c2VybmFtZSI6IiQkZGVsdDMifQ==.02318C44-9F3A-F931-3F14-C6FA7576F55E7D8D9975C46B5805179BD10D890DF15F"
}
```

You can use this token in the Header section of all REST services for authentication.

Note: The expiry date is displayed as per the user date format preferences set in the Integration user interface.

Sample Header

This is an example of a header using basic authentication.

Key	Value
Authorization	Basic eyJ0eXAiOiJEQiJ9.eyJ1c2VybmFtZSI6IiQkZGVsdDMifQ==.02318C44-9F3A-F931-3F14-C6FA7576F55E7D8D9975C46B5805179BD10D890DF15F

Supported HTTP Status Codes

The following HTTP status codes are supported for this REST service:

HTTP Status Code	Status Message	Error Message
200	Success	none
400	Bad Request	*Invalid expiry.*
401	Unauthorized	*Empty or Invalid Authorization Header.* *Invalid Authorization Header*

V2 Get Token REST Service for Basic Authentication

GET https://<hostname>/ws/rest/service/v2/auth/token

Purpose

Use this REST service with your credentials to fetch a JWT token to access the V2 REST services. The token is valid for date/time available in the response.

Request Format

Send an API request for a token with the end point URL included in the following curl command.

```
curl --location --request GET
'http://<HOST_NAME/ws/rest/service/v2/auth/token' \
--header 'Authorization: Basic XXXXXXX'
```

Response Format

A JSON object is returned in the following format:

```
{
    "data": [],
    "message": [],
    "status": <REST status code value>,
}
```

Sample Success Response

This is an example of a successful response to a request.

```
{
    "data": {
        "expiryDate": "30/09/2023",
        "Timezone": "(UTC+05:30) Chennai, Kolkata, Mumbai, New Delhi",
        "access_token":
"eyJ0eXAiOiJEQiJ9.eyJ1c2VybmFtZSI6IiQkbW9oYW5kMzIifQ==.6CCC9E5E-9266-E1
54-59F2-DB861A6C7142205367E35B6B058F4B6A03BD6E4BD814",
        "auth_type": "Basic",
        "expiryTime": "30/09/2023 08:20 PM",
        "expires_in": 172800
    },
    "message": [],
    "status": 200
}
```

Supported Response Parameters for Basic Authentication

For basic authentication, the following parameters display values in the response output:

Response Parameter	Data Type	Description
access_token	string	Displays the bearer token.
expires_in	string	Displays the expiry duration in seconds.
expiryDate	string	Displays the expiry date formatted in accordance to the integration user's timezone.

Response Parameter	Data Type	Description
Timezone	string	Displays the integration user's timezone.
auth_type	string	Displays the authentication type used by the integration user. Choices include: Basic, and OAuth.
expiryTime	string	Displays the expiry time formatted in accordance to the integration user's timezone.
message	string	Displays the error message.
status	string	Displays the http status code.

Supported Validation Messages and Status Codes

The following HTTP status codes are supported for this REST service:

HTTP Status Code	Status Message	Error Message
200	Sucess	not applicable.
400	Bad Request	*Invalid expiry.*
401	Unauthorized	*Empty or Invalid Authorization Header.* *Invalid Authorization Header*
500	Internal Server Error	*Please contact Administator with Diagnostic code.*

Setting Up Integration Users with OAuth Authentication

V1 and V2 REST services can be authenticated using OAuth Authentication by integrating with your identity domain.

Note: OAuth authentication is only possible for Cloud customers.

New OAuth integration users must be set up on the Primavera Administration Portal application. You will need to raise a service request accordingly.

To switch existing users from basic authentication to OAuth authentication, you will need to raise a service request. After the service request is completed, existing basic authentication users will now have an *inactive* status.

V1 Get Token REST Service for OAuth Authentication

GET /ws/rest/service/v1/oauth/token

Version: 21.7

Purpose

Use this REST service to generate an an OAuth token to access V1 REST services.

Authorization

Use the OAuth type integration user and password reset using email.

Input Authorization

Username and password using Basic Authentication

All parameters should be URL encoded.

```
curl --location 'http://<HOST>/ws/rest/service/v1/oauth/token' \
--header 'Authorization: Basic XYZ'
```

Optional Request Parameter

Use the following parameter to modify the token expiration in the API request:

Request Parameter	Data Type	Description
Expiry	string	Enter the optional token expiration duration in seconds. For example, expiry=300. The default value is 3600 seconds.

Response Format

A JSON object is returned in the following format:

```
{
    "data": [],
    "message": [],
    "status": <REST status code value>,
}
```

For a successful status (status code 200), the token details will be sent in the JSON output response.

If the status is not a success, then a JSON object containing a 'message' is returned.

Sample Success Response

This is an example of successful response.

{

"access_token": "eyJ4NXQjUzI1NiIdds6IkRoQXRBNENzTDRUdEIza1BLRlY3TTZSUzlCbExBamIxbDBvV2V6OXpaUXMiLCJ4NXQiOiJXMlR2WXlBeTZZTEpUSndBRC1YdENRRXFmbnMiLCJraWQiOiJTSUdOSU5HX0tFWSIsImFsZyI6IlJTMjU2In0.eyJ1c2VyX3R6IjoiQW1lcmljYVwvQ2hpY2FnbyIsInN1YiI6Imp5b",

"token_type": "Bearer",

"expires_in": 3600,

"status": 200

}

V2 Get Token REST Service for OAuth Authentication

GET https://<hostname>/ws/rest/service/v2/auth/token

Purpose

Use this rest service with your credentials to fetch a JWT token to access V2 REST services. The token is valid for date/time available in the response. The token expiration is set to 3600 seconds by default.

Request Format

Send an API request for a token with the end point URL included in the following curl command.

```
curl --location --request GET
'http://<HOST_NAME/ws/rest/service/v2/auth/token' \
--header 'Authorization: Bearer XXXXXXX'
```

> **Note**: If the endpoint URL has a project number that contains special characters such as / \ : * ? " < > or |, you must change those special characters to URL escape characters. For example, A project number with a special number sign (hash) such as 2020#7 must be changed to 2020%7. You can use a browser to access the list of URL escape characters.

Optional Request Parameter

Use the following parameter to modify the token expiration in the API request:

Request Parameter	Data Type	Description
Expiry	string	Enter the optional token expiration duration in seconds. For example, expiry=300.

Sample Success Response

This is an example of a successful response to a request.


```
{
    "data": {
        "access_token":
"eyJ4NXQjUzI1NiI6IjN2dFl1OU04ejFJSWlieDI2c2k1b2J1ekZ4RlBlRFpTcmhjX01kcH
pjcE0iLCJ4NXQiOiItZlVTYTJVeGNzRGxJUzBxbHRrT3c5cEtyNlUiLCJraWQiOiJTSUdOS
U5HX0tFWSIsImFsZyI6IlJTMjU2In0.eyJjbGllbnRfb2NpZCI6Im9jaWQxLmRvbWFpbmFw
cC5vYzEuaWFkLmFtYWFhYWFhYXF0cDViYWE1Z3Rwd25zbW5nbjY1eGdmcTIyZ3hsamFpeHp
idWp3ZmVpNTY0Zmp5YjduYSIsInVzZX",
        "expires_in": 3600,
        "token_type": "Bearer",
        "auth_type": "oAuth"
    },
    "message": [],
    "status": 200
}
```


Supported Response Parameters for OAuth Authentication

The following parameters display with values in the response output:

Response Parameter	Data Type	Description
access_token	string	Displays the bearer token.
expires_in	string	Displays the expiry duration in seconds. By default, 3600 seconds.
token_type	string	Displays the Bearer token type.
auth_type	string	Displays the authentication type used by the integration user. Choices include: Basic, and OAuth.
message	string	Displays the error message.
status	string	Displays the http status code.

Supported HTTP Status Codes

The following HTTP status codes are supported for this rest service:

HTTP Status Code	Status Message	Error Message
200	Success	not applicable.
400	Bad Request	*Invalid expiry.*
401	Unauthorized	*Empty or Invalid Authorization Header.* *Invalid Authorization Header*
500	Internal Server Error	*Please contact Administator with Diagnostic code.*

Representational State Transfer (REST) Web Services V1

HTTP Methods

GET, POST, PUT, DELETE

Authentication

If you use *Basic Authentication*, follow the steps in the ***Setting Up Integration Users with Basic Authentication*** (on page 153) topic to create an Integration users and retrieve the Authentication token.

If you use *OAuth Authentication*, follow the steps in the ***Setting Up Integration Users with OAuth Authentication*** (on page 157) topic to create Integration users and retrieve the Authentication token.

Prerequisite for invoking any rest service - Integration user and JWT Auth token should be available.

Integration User:

All REST services should be accessed via Integration User.

Token can now be used in all rest services for authentication mechanism. All rest services should have the below set in the 'Header'.

Header - Sample

Key	Value
Authorization	Bearer eyJ0eXAiOiJEQiJ9.eyJ1c2VybmFtZSI6IiQkZGVsdDMifQ==.02318C44-9F3A-F931-3F14-C6FA7576F55E7D8D9975C46B5805179BD10D890DF15F

Note: Validity of the token is as given in the login. The same can be re-used for subsequent rest requests until the expiry date.

User can change Expiry Date to minutes, hours, and days in UI. Rest will retain those settings and generate new token with given Expiry Duration in the UI.

If the Authorization token is not valid/correct for subsequent rest requests, those services will throw 401 status code(Unauthorized).

If the Authorization token is correct but user (for whom token is generated) does not have permission for any rest request, that service will throw 403 status code (Forbidden).

For every login rest service initiated, a new token is generated, old token is invalidated.

Data

If integration interface is defined for BP, then integration form will be used for this service; otherwise, all custom DEs defined in the form will be used.

For update, specify only the DEs to be updated.

Data Format

Input and output data will be in JSON format. Set HTTP header **Content-Type : application/json.**

Data Transfer

- HTTP request body will be used to send the JSON data.
- Multipart/form-data will be used to handle files.

Default Integration User

For migrating customers before 19.7, default integration user with company shortname and authcode with access to existing system services.

Default cloud user has 500 days Auth token validity.

Standards

Get Method

Will be used to request data from a source when no parameters are sent in the body.

> **Note:** Do not use the word "get" in the URL.

URL Encoding GET call parameter values

All parameters in GET call must be URL encoded.

For Postman REST client, use following code in "**pre-request Script**" tab, which will trim extra spaces in params key and encode special characters in params value.

```
pm.request.url.query.all().forEach( (param) =>
{
        param.key = param.key.trim();
        param.value = encodeURIComponent(param.value );
    }
);
```

POST Method

POST can be used to retrieve data with parameters in body.

Can be used for CREATE, Retrieve data with parameters.

For example, getBprecordlist - bpname is mandatory and needs to be a sent in request body.

> **Note:** Do not use the word "create" in the URL.

To distinguish create and get data with parameters, term list can be added in the URL.

PUT Method

PUT is used update data.

> **Note:** Do not use the word "update" in the URL.

Logging:

All REST operations get audited in internal audit log table (not accessible to User, as it is not business case audit logs).

A background CRON job is created to run on every SUNDAY 4:00AM (server time zone) which will purge older REST internal audit logs which goes beyond 25000 audit rows.

IP Filtering:

Customers have the ability to provide the list of IP addresses that can consume REST Web Services (V1 or V2). The IP Filtering option is available in the portal in the **Company Properties** - **Security** tab.

If the 'IP Filtering Policy' field is checked in company properties, then the remote host will be validated based on their IP Version.

1. If the remote host is IPv4 version, it will be checked against the list of IP addresses provided in the IPv4 text box.
2. If the remote host is of IPv6 version, it will be checked against the list of IPs provided in the IPV6 text box.
3. If IP addresses are provided in CIDR format, then the remote host IP will be checked against all addresses that come in the range.

Additional Information

If the endpoint URL has a project number and the project number contains special characters (such as / \ : * ? " < > |), you must change those special characters to URL escape characters.

Example

Project number with a special number sign (hash) such as 2020#7 must be changed to 2020%7.

> **Note:** You can use a browser to access the list of URL escape characters.

In This Section

Document Manager 166
Business Processes 219
Shell Manager 288
Level 296
Space 304
Cost 313
Cash Flow 327
Schedule Sheet 437
Exchange Rates 440
Data Structure Setup 444
Partner Company 494
User 516
User Defined Report (UDR) 521
Get Templates List 524
Data 527
Data Format 527
Data Transfer 528
Event Driven Notification 528
Funding 530
Non-Workflow BP Permissions 567

Document Manager

The Unifier Document Management Representational State Transfer (REST) Application Program Interface (API) has the following components:

- Folder Services
- Document Services

Notes:

- The UserServices uses the login user access control to run the service calls. The web service uses the company or project admin to run the service calls.
- Before making the REST calls, set the JSESSIONID cookie (with valid value) in the request header (from the REST client code).

Folder Services

Create Folders by Path

```
POST /ws/rest/service/v1/dm/folder/create
```

Purpose

This service allows you to create folders under a parent folder. You can also use this service to create folders under different parent folders.

- projectnumber (String) Optional. Not required for company level.
- data (JSON String) Required: List of field and values for the folder attribute form.
  - Path: Specify the full parent path where folder has to created.
  - Name: Name of the folder to create: "Folder1"
  - Path and Name are required fields, other fields are optional/required based on the attribute form design.

Prerequisites

To use this REST service:

- Configure the Document Manager in the shell where folder is to be created.
- To include categories and phases in the request, in the **Company Workspace**, ensure the categories are configured in the **Data Structure Setup > Data Definitions > Basic > SYS Category and phases from Data Structure Setup > Data Definitions > Basic > Project Phase**.
- As an integration user, you must also have create access on DM functionality.

Request Format

Send an API request in the following format:

```
(Form Data (content type : application/x-www-form-urlencoded))
data:[
        {
           "Path": "<value>",
           "Name": "<value>",
           "Owner": "<value>",
           "Creation Date": "<value>",
           "% Complete": "<value>",
           "node_id": "<value>"
        }
    ]
```

> **Note**: `Creation Date`, `% Complete`, and `Owner` are optional fields and are loaded by default with appropriate values. The `Owner` is the shell-level administrator.

Supported Request Parameters

The following parameters can be included in the request:

Request Parameter	Required?	Data Type	Description
projectnumber	Yes	String	The project number or shell that is to be included in the folder. However, if you creating a folder at the company level, the projectnumber is not mandatory. By default, when the projectnumber is not provided, the folder is then created in the specified path within the Company Level Shell.
Data JSON Map: The following parameters can be included. Optional fields are based on the **Attribute** form design.			
Path	Yes	String	Path in the Document Manager where you want to create a folder.
Name	Yes	String	Name of the folder to be created. A maximum length of 250 characters is supported. Names that will not be supported are those that contain non-printable ascii, / or \, names with trailing spaces, and the special names "." and "..".
Description	No	String	A short description of the folder's purpose.
Categories	No	String	The folder category associated with the folder to be created.
Phases	No	String	The phase associated with the folder to be created. For example, Preplanning.

Sample Request

To create a folder "REST Folder" under "/Project Documents/Folder112" then data should as below

```
projectnumber:TestProj-C
data:[
    {
        "Path":"/Folder112",
        "Name":"REST Folder",
        "Owner":"Company Administrator",
```

```
        "Creation Date":"01/01/2016",
        "% Complete":"100",
        "Comments":"Fold 1"
    }
]
```

Sample Response Format

A JSON object is returned in the following format:

```
{
    "data": [],
    "message": [],
    "status": <REST status code value>,
}
```

where:

`"data": []` contains list of fields defined in the Folder Attribute form.

Sample Success Response

In addition to the data, a successful response displays:

- a response "status" code of 200
- a `_record_status` key with a "SUCCESS" value or an error message

```
{
"data":
[
{
"Path":"/Folder112/Folder112",
"Creation Date":"01/01/2016",
"Owner":"Company Administrator",
"Comments":"Fold 1",
"% Complete":"100",
"Name":"REST Folder",
"node_id":"2003150"
}
],
"message":
[
{
```

```
"message":"OK"
}
],
"status":200
}
```

Sample Failed Response

The following is an example of the failed response:

```
{
"data":
[
{
"Path":"/Folder112/Folder112",
"Creation Date":"01/01/2016",
"Owner":"Company Administrator",
"Comments":"Fold 1",
"% Complete":"100",
"Name":"REST Folder"
}
],
"message":
[
{
"message":"Folder with given name already exists"
}
],
"status":1043
}
```

Supported Validation Messages and Status Codes

The following error messages and status codes display in the response when incorrect values are provided in the request.

Field Name	Use-case Scenario	Status code	Error Message
projectnumber	An invalid projectnumber is specified in the request.	602	Project/Shell Number is not correct.

Field Name	Use-case Scenario	Status code	Error Message
projectnumber	The projectnumber is blank and thepath is not valid.	1043	Parent path or node id is invalid or does not exists.
Path	The Path is not specified.	500	Server Error, contact system administrator.
Path	An invalid path is specified.	1043	Parent path or node id is invalid or does not exists.
Name	Name is blank.	1043	Input Name Required-Empty Name Given.
Name	Name is not specified in the data JSON object.	1043	Server Error, contact system administrator.
Name	An invalid Name is specified including special characters.	1043	Folder Name can not have special characters '/','\\',':','*','?','\"','<','>','|'
Name	An existing Name is specified (case-insensitive).	1043	Folder with given name already exists.
Description	The Description exceeds 2000 characters.	1043	Valid Input required for fields : 'Description'.
Categories	An invalid Category is specified	1043	Invalid Categories, Please provide correct Category values.
Phases	An invalid Phase is specified.	1043	Invalid Phases, Please provide correct Phase values.

Create Folders by Parent Folder ID

```
POST /ws/rest/service/v1/dm/folder/create/<parent_folder_id>
```

Purpose

This service allows you to create folders under a specific folder. The parent folder is specified as node id in the service call's path parameter.

Prerequisites

To use this REST service:

- Configure the Document Manager in the shell where folder is to be created.

- To include categories and phases in the request, in the **Company Workspace**, ensure the categories are configured in the **Data Structure Setup > Data Definitions > Basic > SYS Category and phases from Data Structure Setup > Data Definitions > Basic > Project Phase**.

  Multiple categories and phases can be included in the request.
- As an integration user, you must also have create access on DM functionality.

Request Format

Send an API request in the following format.

```
(Form Data (content type :
application/x-www-form-urlencoded))<parent_node_id value>
data:[
        {
            "Path": "<value>",
            "Description": "<value>",
            "Phases": "<value>",
            "Categories": "<value>",
            "Name": "<value>",
        }
    ]
```

> **Note**: parent_node_id can be provided as a part of path parameter in request.

Supported Request Parameters

The following parameters can be included in the request:

Request Parameter	Required?	Data Type	Description
parent_node_id	Yes	Integer	The node_id under which the folder is created. To get the node_id value for the parent folder, use the ***Get Folders or Documents Meta Data by Path*** (on page 184) REST service.
Data JSON Map: The following parameters can be included. All other fields are required or optional based on the **Attribute** form design.			

Request Parameter	Required?	Data Type	Description
Name	Yes	String	Name of the folder to be created. A maximum length of 250 characters is supported. Names that will not be supported are those that contain non-printable ascii, / or \, names with trailing spaces, and the special names "." and "..".
Description	No	String	A short description of the folder's purpose.
Categories	No	String	The folder category associated with the folder to be created.
Phases	No	String	The phase associated with the folder to be created. For example, Preplanning.

Sample Request

To create a "2023" folder under "/Project Documents/Service docs" whose node id (2002896) is specified in path parameter, send the request as shown below:

```
URL:http://unifier-intg.oracle.com/ws/rest/dm/folder/create/2002896
data:[
            {
                        "Name":"2023",
                        "Owner":"Company Administrator",
                        "Creation Date":"01/01/2016",
                        "% Complete":"100",
                        "Description":"Fold 1"
            }
     ]
```

Sample Response Format

A JSON object is returned in the following format:

> **Note**: The data will be same as input data with new folder id and parent folder ID.

```
{
    "data": [],
    "message": [],
    "status": <REST status code value>,
    "rest_audit_id": <value>
}
```

Sample Success Response

In addition to the data, a successful response displays:

- a response "status" code of 200
- a `_record_status` key with a "SUCCESS" value or an error message

```
{
"data":
[
{
"Path":"/Service docs",
"Creation Date":"01/01/2016",
"Owner":"Company Administrator",
"Description":"Fold 1",
"% Complete":"100",
"Name":"REST Folder",
"node_id":"2003152"
}
],
"message":
[
{
"message":"OK"
}
],
"status":200
}
```

Sample Failed Response

The following is an example of a failed response.

```
{
    "data":
      [
            {
                "Path":"/Service docs",
                "Creation Date":"01/01/2016",
                "Owner":"Company Administrator",
                "Description":"Fold 1",
                "% Complete":"100",
                "Name":"REST Folder"
            }
      ],
    "message":
      [
            {
                "message":"Folder with given name already exists"
            }
      ],
    "status":1043
}
```


Supported Validation Messages and Status Codes

The following error messages and status codes display in the response when incorrect values are provided in the request.

Field Name	Use-case Scenario	Status code	Error Message
parent_node_id	parent_node_id is blank.	500	Server Error, Contact System Administrator.
parent_node_id	parent_node_id is invalid.	1039	Parent path or node id is invalid or does not exist.
Name	Name is blank.	1043	Input Name Required-Empty Name Given.
Name	Name is not specified in the data JSON object.	1043	Server Error, contact system administrator.

Field Name	Use-case Scenario	Status code	Error Message
Name	An invalid Name is specified including special characters.	1043	Folder Name can not have special characters '/','\\',':','*','?','\"','<','>','|'
Name	An existing Name is specified (case-insensitive).	1043	Folder with given name already exists.
Description	The Description exceeds 2000 characters.	1043	Valid Input required for fields : 'Description'.
Categories	An invalid Category is specified	1043	Invalid Categories, Please provide correct Category values.
Phases	An invalid Phase is specified.	1043	Invalid Phases, Please provide correct Phase values.

Update Folder Meta Data by Path

```
POST /ws/rest/service/v1/dm/folder/update
```

Purpose

This service allows you to modify the metadata for documents under a folder using the folder path value.

Prerequisites

To use this REST service:

- Configure the Document Manager(DM) in the shell where folder is to be created.
- To include categories and phases in the request, in the **Company Workspace**, ensure the categories are configured in the **Data Structure Setup > Data Definitions > Basic > SYS Category and phases from Data Structure Setup > Data Definitions > Basic > Project Phase**.

  Multiple categories and phases can be included in the request.
- As an integration user, you must also have update access on DM functionality.

Request Format

Send an API request in the following format:

```
(Form Data (content type :
application/x-www-form-urlencoded))projectnumber: <value>

data:[

        {
```

```
            "Path": "<value>",
            "Description": "<value>",
            "Name": "<value>",
            "Categories": "<value>",
            "Phases": "<value>",
        }
]
```

> **Note**: parent_node_id can be provided as a part of path parameter in request.

Supported Request Parameters

The following parameters can be included in the request:

Request Parameter	Required?	Data Type	Description
projectnumber	Yes	String	The project number or shell that is to be included in the folder. However, if you creating a folder at the company level, the projectnumber is not mandatory. By default, when the projectnumber is not provided, the folder is then created in the specified path within the Company Level Shell.
Data JSON Map: The following parameters can be included. Optional fields are based on the **Attribute** form design.			
Path	Yes	String	Path in the Document Manager where you want to update a folder. Specify the full path of the document to update. For example, "/Project Documents/Service docs/Folder1/pipeline estimate.doc"
Name	No	String	The new name of the renamed folder. A maximum length of 250 characters is supported. Names that will not be supported are those that contain non-printable ascii, / or \, names with trailing spaces, and the special names "." and "..".

Request Parameter	Required?	Data Type	Description
Description	No	String	A short description of the folder's purpose.
Categories	No	String	The folder category associated with the folder being updated.
Phases	No	String	The phase associated with the folder being updated. For example, Preplanning.

Sample Request

To update a document "dm1.PNG" under "/test" folder, the data must be:

```
URL: http://<host>:<port>/ws/rest/service/v1/dm/document/update
data:[
            {
                 "Path":"/test/dm1.PNG",
                 "Name":"dm1.PNG",
                 "Owner":"Company Administrator",
                 "Creation Date":"01/01/2016",
                 "% Complete":"100",
                 "Description":"dm1.PNG df"
            }
     ]
```

Tip: Use the GET call to get the structure of the JSON data.

Response Format

A JSON object is returned in the following format.

```
{
    "data": [],
    "message": [],
    "status": <REST status code value>,
    "rest_audit_id": <value>
}
```

Note: The read-only fields will not be updated with values from input.

Sample Success Response

This is an example of a successful response:


```
{
	"data":[
				{
					"Path":"/test/dm1.PNG",
					"Creation Date":"01/01/2016",
					"Owner":"Company Administrator",
					"Description":"dm1.PNG df",
					"% Complete":"100",
					"Name":"dm1.PNG"
				}
		],
	"message":[
				{
					"message":"OK"
				}
			],
	"status":200
}
```


Sample Failed Response

This is an example of a failed response with a status code 505 for an invalid folder name.


```
{
	"data":[
				{
					"Path":"/test/dm2.PNG",
					"Creation Date":"01/01/2016",
					"Owner":"Company Administrator",
					"Description":"dm1.PNG df",
					"% Complete":"100",
					"Name":"d1.PNG"
```

```
                              }
          ],
     "message":[
                              {
                                   "message":"Invalid folder name."
                              }
          ],
     "status":505
}
```

Supported Validation Messages and Status Codes

The following validation messages and status codes display in the response when incorrect values are provided in the request.

Field Name	Use-case Scenario	Status code	Error Message
projectnumber	The projectnumber is invalid.	602	Server Error, Contact System Administrator.
projectnumber	The projectnumber is blank and Path is not valid.	505	Invalid folder name.
projectnumber	The projectnumber is blank and Path is valid at the Company level.	200	Ok
Path	The Path is blank	500	Server Error, contact system administrator.
Path	An invalid Path is specified.	505	Invalid folder name.
Name	The Name is blank.	505	Input Required: Name
Name	An invalid Name is specified including special characters.	505	Folder Name can not have special characters '/','\\',':','*','?','\"','<','>','|'
Name	Name is not specified in the data JSON object.	505	Server Error, contact system administrator.
Name	Renamed a folder in a blank shell.	505	Invalid folder name.
Name	Renamed a root folder.	505	Root folder can not be renamed.

Field Name	Use-case Scenario	Status code	Error Message
Name	An existing folder is duplicated (case-insensitive)	505	Folder with given name already exists
Categories	An invalid Category is specified.	505	Invalid Categories, Please provide correct Category values
Phases	An invalid Phase is specified.	505	Invalid Phases, Please provide correct Phase values

Update Folder Meta Data by Folder ID

POST /ws/rest/service/v1/dm/folder/update/<node_id>

Purpose

This service allows user to update a specific folder meta data using the folder node id.

Prerequisites

To use this REST service:

- Configure the Document Manager(DM) in the shell where folder is to be created.
- To include categories and phases in the request, in the **Company Workspace**, ensure the categories are configured in the **Data Structure Setup > Data Definitions > Basic > SYS Category and phases from Data Structure Setup > Data Definitions > Basic > Project Phase**.

  Multiple categories and phases can be included in the request.
- As an integration user, you must also have update access on DM functionality.

Request Format

Send a request in the following format.

```
(Form Data (content type : application/x-www-form-urlencoded))
http://<host>:<port>/ws/rest/service/v1/document/update/<node_id>
```

> **Note**: Use the ***Get Folders or Documents Meta Data by Path*** (on page 184)" REST service to get the node_id value for the folder.

Supported Request Parameters

The following parameters can be included in the request:

Request Parameter	Required?	Data Type	Description
node_id	Yes	String	The node_id whose meta data is to be updated.
Data JSON Map: The following parameter can be included.			
Name	No	String	The name of the folder whose meta data is being updated. A maximum length of 250 characters is supported. Names that will not be supported are those that contain non-printable ascii, / or \, names with trailing spaces, and the special names "." and "..".

Response Format

A JSON object is returned in the following format.

```
{
    "data": [],
    "message": [],
    "status": <REST status code value>,
}
```

> **Note**: The read-only fields will not be updated with input values.

Sample Request

To update the folder, "trial2" under "/abcd10/f2" specified in the path parameter with node_id 754

```
(Form Data (content type : application/x-www-form-urlencoded))
http://localhost:7003/ws/rest/service/v1/dm/folder/update/754
data:[ {"Name":"trial2" } ]
```

Sample Success Response

This is an example of a successful response to the above sample request.

```
{
     "data": [
                        {
                             "Path": "/abcd10/f2",
                             "Name": "trial2"
```

```
                    }
                ],
     "message": [
                    {
                         "message": "OK"
                    }
          ],
    "status": 200
}
```

> **Note**: Use the GET call to get the structure of the JSON data.

Sample Failed Response

This is an example of a failed response to a request when an invalid node_id is specified in the request.

```
{
    "data":[
                    {
                         "Creation Date":"01/01/2016",
                         "Comments":"Fold 2 update dmpick",
                         "% Complete":"100",
                         "Name":"DmPicker"
                    }
         ],
    "message":[
                    {
                         "message":"Parent path or node id is invalid
or does not exists."
                    }
             ],
    "status":1039
}
```

Supported Validation Messages and Status Codes

The following validation messages and status codes display in the response when incorrect values are provided in the request.

Field Name	Use-case Scenario	Status code	Error Message
node_id	The node_id is invalid.	1039	Parent path or node id is invalid or does not exists.
node_id	The projectnumber is blank.	500	Server Error, Contact System Administrator.
Name	The Name is blank.	505	Input Required: Name
Name	An invalid Name is specified including special characters.	505	Folder Name can not have special characters '/','\\',':','*','?','\"','<','>','|'
Name	Renamed a folder in a blank shell.	505	Invalid folder name.
Name	Renamed a root folder.	505	Root folder can not be renamed.
Name	An existing folder is duplicated (case-insensitive)	505	Folder with given name already exists

Get Folders or Documents Meta Data by Path

GET /ws/rest/service/v1/dm/node/properties

Purpose

This service allows you to retrieve a folder's or a document's meta data using a folder path.

Prerequisites

To use this REST service:

- Configure the Document Manager(DM) in the shell where folder is to be created.
- To include categories and phases in the request, in the **Company Workspace**, ensure the categories are configured in the **Data Structure Setup > Data Definitions > Basic > SYS Category and phases from Data Structure Setup > Data Definitions > Basic > Project Phase**.

  Multiple categories and phases can be included in the request.
- As an integration user, you must also have update access on DM functionality.

Request Format

Send a request in the following format.

```
URL:
http://<host>:<port>/ws/rest/service/v1/dm/node/properties?projectnumber=<value>&parentpath=<value>
```

Supported Request Parameters

The following parameters can be included in the request.

Request Parameter	Mandatory?	Data Type	Description
projectnumber	Yes	String	The shell in which the folder is to be created. Empty for Company level DM.
parentpath	Yes	String	The path of the folder in Document Manager whose meta data is being requested.
nodetype	No	String	The properties of the Folder or Document depending on the nodetype. Valid values include: "Folder" and "Document". If no value is specified, then both, the folder and document properties will be returned.

Response Format

A JSON object is returned in the following format.

```
{
    "data": [],
    "message": [],
    "status": <REST status code value>,
}
```

Sample Request

To obtain the meta data of the project, TestProj-C, with parentpath, /u17.1, send a request as shown below.

```
http://<host>:<port>/ws/rest/service/v1/dm/node/properties?projectnumber=TestProj-C&parentpath=/u17.1
```

Sample Response

This is an example where the "data" is an array of document or folder properties.

```
{
  "data":
  [
    {
      "Owner":"Company Administrator",
```

```
      "projectnumber":null,
      "node_path":"/Company Documents",
      "Description":"",
      "type":"Folder",
      "foreignKeyId":-1000,
      "parentUuid":null,
      "Name":"Company Documents",
      "parent_node_id":285,
      "foreignEntityType":"company",
      "% Complete":"0",
      "Location":"/",
      "node_id":700,
      "upload_date":"2017-12-07T07:54"
    },

    {
      "Revision No.":"",
      "Owner":"Company Administrator",
      "projectnumber":null,
      "node_path":"/Folder
City/Fremont/AutoVue_Applet-Free_Client_TUD.pdf",
      "Description":"",
      "Pub No.":"1",
      "file_name":"AutoVue_Applet-Free_Client_TUD.pdf",
      "annotate":true,
      "type":"Document",
      "title":"",
      "foreignKeyId":-1000,
      "parentUuid":294,
      "file_size":"448519",
      "uuu_create_by":"Company Administrator",
      "file_id":58,
      "Issue Date":"",
      "foreignEntityType":"company",
```

```
      "% Complete":"0",
      "Location":"/Folder City/Fremont",
      "node_id":306,
      "upload_date":"2017-11-03T14:02"
    },

  ],
  "message":
  [
  ],
  "status":200
}
```


Sample Failed Response

This is an example of a failed response when a parentpath is incorrect or blank.


```
{
  "data":[ ],
  "message":[
    {
        "message":"Parent path or node id is invalid or does not exists."
    }
            ],
  "status":1039
}
```


Get Folders or Documents Meta Data by Parent Folder ID

`GET /ws/rest/service/v1/dm/node/properties/<parent_folder_id>`

Purpose

This service allows you \ to retrieve the folders or documents meta data under a folder path by using the parent folder node id.

Request Format

Send a request in the following format:

```
http://<host>:<port>/ws/rest/service/v1/dm/node/properties/<parent_folder_id>?nodetype=<value>
```

Supported Request Parameters

Supported Request Parameters

The following parameters can be included in the request.

Request Parameter	Required?	Data Type	Description
parent_folder_id	Yes	Integer	The node id of the parent folder of the folder or document meta data is to be retrieved.
nodetype	No	String	The properties of the Folder or Document depending on the nodetype. Valid values include: "Folder" and "Document". If no value is specified, then both, the folder and document properties will be returned.

Response Format

A JSON object is returned in the following format.

```
{
    "data": [],
    "message": [],
    "status": <REST status code value>,
}
```

Sample Request

This is an example of a request to retrieve a document's meta data with a parent folder ID,2003148.

```
URL:http://<host>:<port>/ws/rest/dm/node/properties/2003148?nodetype=Document
```

Sample Success Response

This is an example of a successful response.

```
{
"data":
```

```
[
{
"Revision No.":"",
"Owner":"Company Administrator",
"projectnumber":"B-001",
"node_path":"/DmPicker/dm1.PNG",
"Description":"",
"Pub No.":"1",
"Size":"125718",
"Default Status for Leased Space":"",
"Title":"",
"PWO Line Item No":"",
"type":"Document",
"Name":"dm1.PNG",
"parent_node_id":298716,
"Creation Date":"2018/02/13 12:45",
"project_id":1170,
"file_id":139100,
"Issue Date":"",
"Upload By":"Company Administrator",
"Upload Date":"2018/02/13 12:45",
"% Complete":"0",
"Location":"/DmPicker",
"node_id":298717
}
],
"message":
[
],
"status":200
}
```

Document Services

Create Documents by Path

`POST /ws/rest/service/v1/dm/document/create`

Purpose

- Provide the ability for customers to add documents (files) with their metadata to particular folder.
- Supports adding revision to an existing document.

Input

This a multi-part request and *all* parameters should be listed *before* all file parts and should use the following order.

- projectnumber (String) Optional. Not required for company level.
- dorevise: (String) Optional. This flag is used to automatically revise file with same file name. Expected values are "yes" or "no". Default is no.
- data (JSON String) Required: List of field and values for the document attribute form.
  - Path: Full path where the document will be created. The folder path must exists for the document to be created.
  - Name: Name of the document that needs to be created.

Output

JSON object containing 'status', 'data', 'message'

Example

To create a document "ProjectDetails.doc" under "/Project Documents/Service docs" then data should as below

[

{"path":"/Service docs","fileName":"ProjectDetails.doc","docTitle":"project details","revNo":"1","issueDate":"06/01/2016", additional document attribute form properties, excluding creation date and owner }

]

Notes:

- Except for creation date and owner, you can add any additional document attribute form properties as key value pairs in the preceding JSON.
- This call only updates the elements visible in the upload window, such as Document Title, Revision No, and Issue Date. The system cannot update Custom Data Elements that are not listed in the upload window.

Example Multipart Form Request

Note: The form data body boundary in the example below is "—file upload—", but can be anything (or left unset).

```
-----file upload---
Content-Disposition: form-data; name="shortname"
unifier
-----file upload---
Content-Disposition: form-data; name="authcode"
MTIzMTIz
-----file upload---
Content-Disposition: form-data; name="dorevise"
yes
-----file upload---
Content-Disposition: form-data; name="projectnumber"
Shell-001
 -----file upload---
Content-Disposition: form-data; name="data"
[
{"Path":"/Service
docs","Name":"ProjectDetails.doc","docTitle":"project
details","revNo":"1","issueDate":"06/01/2016", additional document
attribute form properties, excluding creation date and owner }
]
-----file upload---
Content-Disposition: form-data; name="0"; filename="b.txt"
Content-Type: text/plain
test document contents
-----file upload-----
```

Create Documents by Parent Folder ID

POST /ws/rest/service/v1/dm/document/create/<parent_folder_id>

Purpose

- Provide the ability for customers to add documents (files) to a particular folder using the folder node id.
- Supports adding revision to an existing document.

Input

Path Parameter

- parent_folder_id : Parent folder's node id under which the documents will be created.
  - Use “Get Folder or Document meta data by path” REST Service to get the node_id value for the folder.

This a multi-part request and *all* parameters should be listed *before* all file parts and should use the following order.

- projectnumber (String) Optional.

  Project number for project/shell level DM. Empty for Company level DM. (If projectnumber is not given, then the document will be created under company workspace. If the parent folder Id is not under company workspace, then the document will not be visible even in company workspace).
- dorevise: (String) Optional.

  This flag is used to automatically revise file with same file name. Expected values are "yes" or "no". Default is no.
- data (JSON String) Required:

  List of field and values for the document attribute form.
  - Name: Name of the document that needs to be created.

Example

```
To create a document "ProjectDetails.doc" under "/Project
Documents/Service docs" then data should as below
[
 {"fileName":"ProjectDetails.doc","docTitle":"project
details","revNo":"1","issueDate":"06/01/2016", additional document
attribute form properties, excluding creation date and owner }
]
```

Notes:

- Except for creation date and owner, you can add any additional document attribute form properties as key value pairs in the preceding JSON.
- This call only updates the elements visible in the upload window, such

as Document Title, Revision No, and Issue Date. The system cannot update Custom Data Elements that are not listed in the upload window.

Example Multipart Form Request

Note: The form data body boundary in the example below is "—file upload—", but can be anything (or left unset).

```
-----file upload---
Content-Disposition: form-data; name="shortname"
unifier
-----file upload---
Content-Disposition: form-data; name="authcode"
MTIzMTIz
-----file upload---
Content-Disposition: form-data; name="dorevise"  yes
 -----file upload---
Content-Disposition: form-data; name="data"
[
 {"Name":"ProjectDetails.doc","Owner":"Company
Administrator","Creation Date":"01/01/2016","%
Complete":"100","Description":"Fold 1" }
]
-----file upload---
Content-Disposition: form-data; name="0"; filename="b.txt"
Content-Type: text/plain
test document contents
-----file upload-----
```

Output

JSON object containing 'status', 'data', 'message'

Update Documents Meta Data by Path

`POST /ws/rest/service/v1/dm/document/update`

Purpose

Provide the ability to modify the metadata for documents under a folder using the folder path value.

Input

Form Data (content Type: application/x-www-form-urlencoded)

- projectnumber (String) Optional. Project number for project/shell level DM. Empty for Company level DM.
- data (JSON String) Required: List of field and values for the document attribute form.
  - Path: Specify the full path of the document to update. Example "/Project Documents/Service docs/Folder1/pipeline estimate.doc"

Path is a required field. Other fields are optional.

Example

URL: http://<host>:<port>/ws/rest/service/v1/dm/document/update

To update a document "dm1.PNG" under "/test" folder the data should must be:

data:[{"Path":"/test/dm1.PNG","Name":"dm1.PNG","Owner":"Company Administrator","Creation Date":"01/01/2016","% Complete":"100","Description":"dm1.PNG df" }]

Use the GET call to get the structure of the JSON data.

Output

JSON object containing 'status', 'data', 'message'

> **Note**: The read-only fields will not be updated with values from input.

Response in case of success:

```
{
"data":
[
{
"Path":"/test/dm1.PNG",
"Creation Date":"01/01/2016",
"Owner":"Company Administrator",
"Description":"dm1.PNG df",
"% Complete":"100",
"Name":"dm1.PNG"
}
],
"message":
[
{
"message":"OK"
}
],
```

```
"status":200
}
```

Response in case of error:

```
{
"data":
[
{
"Path":"/test/dm2.PNG",
"Creation Date":"01/01/2016",
"Owner":"Company Administrator",
"Description":"dm1.PNG df",
"% Complete":"100",
"Name":"d1.PNG"
}
],
"message":
[
{
"message":"Invalid folder name."
}
],
"status":505
}
```

Update Document Meta Data by Document ID

POST /ws/rest/service/v1/dm/document/update/<document_id>

Purpose

Provide the ability to modify the metadata for a particular document using the node id.

Input

Path Parameter

- document_id : Node id of the document which needs to be updated.
  - Use “Get Folder or Document meta data by path” REST Service to get the node_id value for the document.

Form Data (content Type: application/x-www-form-urlencoded)

- data (JSON String) Required: List of field and values for the document attribute form.

Example

URL: http://<host>:<port>/ws/rest/service/v1/dm/document/update/298717

To update a document "dm1.PNG" under ""/test" the data must be:

projectnumber:B-001

data:[{"Path":"/test/dm1.PNG","Name":"dm1.PNG","Owner":"Company Administrator","Creation Date":"01/01/2016","% Complete":"100","Description":"dm1.PNG data" }]

Use the GET call to get the structure of the JSON data.

Output

JSON object containing 'status', 'data', 'message'

Response in case of success:

```
{ "data": [ { "Path":"/test/dm1.PNG", "Creation Date":"01/01/2016",
"Owner":"Company Administrator", "Description":"dm1.PNG data", "%
Complete":"100", "Name":"dm1.PNG" } ], "message": [ { "message":"OK" }
], "status":200 }
```

Response in case of error:

```
{ "data": [ { "Path":"/test/dm1.PNG", "Creation Date":"01/01/2016",
"Owner":"Company Administrator", "Description":"dm1.PNG data", "%
Complete":"100", "Name":"dm1.PNG" } ], "message": [ { "message":"Parent
path or node id is invalid or does not exists." } ], "status":1039 }
```

Get Documents by Path

GET /ws/rest/service/v1/dm/document

Purpose

Provide a web service to retrieve all the documents (files) and meta data under a folder using the folder path.

Input

Query Parameters

- projectnumber (String) Optional. Project number for project/shell level DM. Empty for Company level DM.
- parentpath (String) Required. Path to a folder in DM
- iszip (String) Optional:
  - "yes" to get all the files in a single zip file.
  - "no" to get individual files.

> **Note**: In order to finish the call successfully, users must put the parameters in the URL. This Web Service call does not permit users to put the parameters in the body as JSON.

Output

Output will be a multi-part response.

- If **iszip** option is yes, then the response file part will be a zip file containing all the documents.
- If **iszip** option is no, then the output will be individual documents in the file part parameter.

Example

There are 2 files b.txt (content is test test) and ucm_migration_issue.txt (content is 1. Most of the cases the wrong file referenced is a report) under the selected directory.

iszip = no

Response Header

Content-Type = multipart/form-data; boundary=QXL6HDrSIJF1imDRjdgUC8bTbHIq1z4PUZ

Response Body

--5MJDL8Wb3f7FtknE7iXUzMYy-W1KqjuFfd6bye

Content-Disposition: form-data; name="response"

Content-Type: application/octet-stream

Content-Transfer-Encoding: 8bit

{"status":200,"data":[],"message": ""}

--5MJDL8Wb3f7FtknE7iXUzMYy-W1KqjuFfd6bye

Content-Disposition: form-data; name="b.txt"; filename="b.txt"

Content-Type: application/octet-stream

Content-Transfer-Encoding: binary

test test

--5MJDL8Wb3f7FtknE7iXUzMYy-W1KqjuFfd6bye

Content-Disposition: form-data; name="ucm_migration_issue.txt"; filename="ucm_migration_issue.txt"

Content-Type: application/octet-stream

Content-Transfer-Encoding: binary

1. Most of the cases the wrong file referenced is a report

--5MJDL8Wb3f7FtknE7iXUzMYy-W1KqjuFfd6bye--

{ "data": [ ], "message": [ ], "status":200 }

iszip = yes

Response Header

Content-Type = application/octet-stream

Response Body

zip file binary data

In case of error:

Output:

```
{
"data":
[
],
"message":
[
{
"message":"Parent path or node id is invalid or does not exists."
}
],
"status":1039
}
```

Get Documents by Parent Folder ID

GET /ws/rest/service/v1/dm/document/<parent_node_id>

Purpose

Provide a web service to retrieve all the documents (files) and meta data under a folder using the parent folder node id.

Input

Path Parameter

- parent_folder_id : Parent folder's node id from which to get the documents.
  - Use “Get Folder or Document meta data by path” REST Service to get the node_id value for the folder.

Query Parameter

- iszip (String) Optional: "yes" to get all the files in a single zip file. "no" to get individual files. Default is "yes"

Output

Output will be a multi-part response.

- If iszip option is yes, then the response file part will be a zip file containing all the documents.
- If iszip option is no, then the output will be individual documents in the file part parameter.

Example

To get the documents under parent_node_id 55889 request URL should be as below:

URL: http://<host>:<port>/ws/rest/service/v1/dm/document/55889

There are 2 files b.txt (content is test test) and ucm_migration_issue.txt (content is 1. Most of the cases the wrong file referenced is a report) under the selected directory.

iszip = no

Response Header

Content-Type = multipart/form-data; boundary=QXL6HDrSIJF1imDRjdgUC8bTbHIq1z4PUZ

Response Body

--5MJDL8Wb3f7FtknE7iXUzMYy-W1KqjuFfd6bye
Content-Disposition: form-data; name="response"
Content-Type: application/octet-stream
Content-Transfer-Encoding: 8bit
{"status":200,"data":[],"message": ""}
--5MJDL8Wb3f7FtknE7iXUzMYy-W1KqjuFfd6bye
Content-Disposition: form-data; name="b.txt"; filename="b.txt"
Content-Type: application/octet-stream
Content-Transfer-Encoding: binary
test test
--5MJDL8Wb3f7FtknE7iXUzMYy-W1KqjuFfd6bye
Content-Disposition: form-data; name="ucm_migration_issue.txt";
filename="ucm_migration_issue.txt"
Content-Type: application/octet-stream
Content-Transfer-Encoding: binary
1. Most of the cases the wrong file referenced is a report
--5MJDL8Wb3f7FtknE7iXUzMYy-W1KqjuFfd6bye--
{ "data": [ ], "message": [ ], "status":200 }

iszip = yes

Response Header

Content-Type = application/octet-stream

Response Body

zip file binary data

In case of error:

Output:

```
{
"data":
[
],
"message":
[
{
"message":"Parent path or node id is invalid or does not exists."
}
],
"status":1039
```

```
}
```

Get Document as Tiff File

```
GET /ws/rest/service/v1/dm/file/view/<file_id>
```

Purpose

Provide a web service to retrieve a file as a multi-page tiff file.

Input

Path Parameter: file_id: internal file id

Output

Request will return a tiff file

Get Document by File ID

```
GET /ws/rest/service/v1/dm/file/download/<file_id>
```

Purpose

Provide a web service to download the contents of a single document based on file id.

Input

Path Parameter

- file_id(Required) : The file id which needs to be downloaded
  - Use “Get Folder or Document meta data by path” REST Service to get the file_id value for the document.

Output

Document file stream object.

Example

```
HTTP/1.1 200 OK
Date: Thu, 01 Sep 2016 15:35:07 GMT
Transfer-Encoding: chunked
Content-Type: application/octet-stream
Content-Disposition: attachment; filename=Autovue_reply.txt
<< Contents of the file being downloaded >>
```

Search Document or Folder Properties

```
POST /ws/rest/service/v1/dm/search
```

Purpose

Provide a web service to search a document/folder properties.

Input

Form Data (content Type: application/x-www-form-urlencoded)

- projectnumber (String) Optional. Project number for project/shell level DM. Empty for Company level DM.
- parentpath (String) Required. Path to a folder in DM
- match (String) : Search condition to apply for search terms. Default is AND. Possible values AND / OR
- nodetype (String) Optional. Specify if you want to search in "folders" or "files". Default is to search in both folders and documents. Values can be "Folder" or "Document".
- query (JSON String) Required if simplequery is not specified : array of search terms. Each of the search term will be joined with AND condition.
  - name: uDesigner element name to be searched. (Required)
  - comparator: Operation to be performed on the value (Optional)
  - value: Search value (Required)
  - value2: Search value for the range comparator (Optional)

  Example:

```
"query":[{ "name":"uuu_file_title", "label":"Title","value":"first
document title", "comparator":"like" }, {
"name":"uuu_file_issue_date", "label":"Issue Date",
"value":"2017-12-07T07:54", "value2":"2017-20-07T07:54",
"comparator":"range" } ]
```

  The above request will search for documents with title like "first document title" and issue date between 2017-12-07T07:54 and 2017-20-07T07:54.

Name	Label
uuu_dm_node_name	Name
uuu_dm_create_by	Owner
uuu_file_title	Title

Comparator

- like : For sting data types. Will perform a like query, %value% (Default)
- eq : For string and numeric data type. Will perform exact match.
- lt : Numeric , Date values. Will perform less than value.
- gt : Numeric , Date values. Will perform greater than value.
- le : Numeric , Date values. Will perform less than or equal value.
- ge : Numeric , Date values. Will perform greater than or equal value.
- ne : Numeric , Date values. Will perform not equal value.
- range : Numeric , Date values. Will perform range search between value and value2.

Example

```
"projectnumber":"0002"
"parentpath":"/Meeting%20Minutes"
"query":[ { "name":"uuu_dm_node_name",
"label":"Name","value":"meetingnotes.txt", "comparator":"like" } ,[ {
"name":"", "label":"Pub No.", "value":"2", "comparator":"gt" }]
"match":"OR"
```

Output

Output will be same as /dm/node/properties REST call.

JSON object containing 'status', 'data', 'message'

"data" will be array of document or folder properties matching the search term specified in the request.

Example

```
{
  "data":
  [
    {
      "Owner":"Company Administrator",
      "projectnumber":null,
      "node_path":"/Company Documents",
      "Description":"",
      "type":"Folder",
      "foreignKeyId":-1000,
      "parentUuid":null,
      "Name":"Company Documents",
      "parent_node_id":285,
      "foreignEntityType":"company",
      "% Complete":"0",
      "Location":"/",
      "node_id":700,
      "upload_date":"2017-12-07T07:54"
    },

    {
      "Revision No.":"",
      "Owner":"Company Administrator",
      "projectnumber":null,
      "node_path":"/Folder
City/Fremont/AutoVue_Applet-Free_Client_TUD.pdf",
```

```
        "Description":"",
        "Pub No.":"1",
        "file_name":"AutoVue_Applet-Free_Client_TUD.pdf",
        "annotate":true,
        "type":"Document",
        "title":"",
        "foreignKeyId":-1000,
        "parentUuid":294,
        "file_size":"448519",
        "uuu_create_by":"Company Administrator",
        "file_id":58,
        "Issue Date":"",
        "foreignEntityType":"company",
        "% Complete":"0",
        "Location":"/Folder City/Fremont",
        "node_id":306,
        "upload_date":"2017-11-03T14:02"
      },

    ],
    "message":
    [
    ],
    "status":200
}
```


Rename a Node by Node ID

POST /ws/rest/service/v1/dm/node/rename/{node_id}

Purpose

Provide a web service to rename a node(folder/document) based on node id.

Input

Path Parameter

- node_id(Required) : The node id which needs to be renamed.

Form Data (content Type: application/x-www-form-urlencoded)

- data: `[{"new_node_name":"rename.json","forceful":"yes" }]`

Output

JSON object containing 'status', 'data', 'message'

Example:

To rename a folder/document with node_id 86375, give the URL as below:
URL: http://<host>:<port>/ws/rest/service/v1/dm/node/rename/86375
data:[{"new_node_name":"rename89.pdf","forceful":"yes" }] projectnumber:B001

Response in case success:

{
"data": [{
"Path": "/RESTMAINFOLDER/Auto_Fold1",
"forceful": "yes",
"node_name_input": "rename89.pdf",
"Name": "rename89.pdf"
}],
"message": [{"message": "Renamed node successfully"}],
"status": 200
}

Response in case of error:

{
"data": [{
"Path": "/RESTMAINFOLDER/Auto_Fold1",
"forceful": "yes",
"node_name_input": "rename.pdf",
"Name": "rename.pdf"
}],
"message": [{"message": "New node name and old node name are same"}],
"status": 505
}

Rename Unpublished Document by File ID

POST /ws/rest/service/v1/dm/node/rename/unpublished/{file_id}

Purpose

Provide a web service to rename an unpublished document based on file id.

Input

Path Parameter

- file_id(Required) : The unpublished document file_id which needs to be renamed.
- Form Data (content Type: application/x-www-form-urlencoded)
  - data: `[{"new_node_name":"rename.json","forceful":"yes" }]`

Output

JSON object containing 'status', 'data', 'message'

Example:

To rename an unpublished document with file_id 219 give URL as below:
URL: http://<host>:<port>/ws/rest/service/v1/dm/node/rename/unpublished/219
data: [{"new_node_name":"renamefile.dwg","forceful":"yes" }]

Response in case of success:

```
{
"data": [ {
"Path": "",
"forceful": "yes",
"node_name_input": "renamefile.dwg",
"Name": "renamefile(1).dwg"
}],
"message": [{"message": "Renamed unpublished document successfully"}],
"status": 200
}
```

Response in case of error:

```
{
"data": [ {
"Path": "",
"forceful": "yes",
"node_name_input": "rename.dwg",
"Name": "rename.dwg"
}],
"message": [{"message": "New file name and old file name are same"}],
"status": 505
}
}
```

Get Node Permissions by Node Path and Project Number

`GET /ws/rest/service/v1/dm/permission/{projectNumber}/node/{node_path}`

Purpose

This service allows user to retrieve permissions of a node by node_path and project number.

Input

Path parameter:

projectnumber: (Optional) project number(if not given, default is company workspace)

node_path: (Path parameter) full node_path of the required node.

Output

JSON object containing permissions data

Example:

To get the permissions of node "test3" under path "/tes2" of projectnumber b1, give the URL as follows.

http://<host>:port>/ws/rest/service/v1/dm/permission/b1/node/test2/test3

Response in case of success:

{
"Inheritance": false,
"ApplyToAllSubFolders": false,
"UserPermission": [
{
"Type": "PG",
"GroupName": "Asset Managers",
"FullName": "Asset Managers",
"DocumentPermission": {
"View": 1,
"Move": 1,
"Copy": 1,
"Delete": 1,
"Download": 1,
"ModifyProperties": 1,
"ModifyPermissions": 1,

"AddComments": 1,
"Revise": 1
},
"FolderPermission": {
"View": 1,
"Move": 1,
"Copy": 1,
"Delete": 1,
"ModifyProperties": 1,
"ModifyPermissions": 1,
"CreateSubFolders": 1,
"AddDocuments": 1
},
{
"Type": "U",
"LoginName": "coadmin",
"FullName": "Company Administrator",
"DocumentPermission": {
"View": 1,
"Move": 0,
"Copy": 0,
"Delete": 0,
"Download": 0,
"ModifyProperties": 0,
"ModifyPermissions": 0,
"AddComments": 0,
"Revise": 0
},
"FolderPermission": {
"View": 1,
"Move": 0,
"Copy": 1,
"Delete": 1,

"ModifyProperties": 1,

"ModifyPermissions": 1,

"CreateSubFolders": 1,

"AddDocuments": 1

}

}

]

}

Response in case of error:

{

"message": ["Invalid Node Path"],

"status": 1075

}

Get Node Permissions by Node Path, Project Number, and User or Group

`GET /ws/rest/service/v1/dm/permission/{projectNumber}/node/{node_path}/user/{username}?usertype={usertype}`

Purpose

This service allows user to retrieve permissions of a node by node_path, project number, user/group name and userType (either 'U' for user, 'PG' for group)

Input

Path parameters:

projectnumber: (Optional) project number (if not given, default is company workspace)

node_path : full node_path of the required node.

username: user/group name. If it is user (user login name should be given, if its group, group name should be given)

usertype: QueryParameter: 'U' for user, 'PG' for group.

POST body is JSON

Request body:

{

"Inheritance": false,

"ApplyToAllSubFolders": false,

"UserPermission": [

{
"Type": "PG",
"GroupName": "Asset Managers",
"FullName": "Asset Managers",
"DocumentPermission": {
"View": 1,
"Move": 1,
"Copy": 1,
"Delete": 1,
"Download": 1,
"ModifyProperties": 1,
"ModifyPermissions": 1,
"AddComments": 1,
"Revise": 1
},
"FolderPermission": {
"View": 1,
"Move": 1,
"Copy": 1,
"Delete": 1,
"ModifyProperties": 1,
"ModifyPermissions": 1,
"CreateSubFolders": 1,
"AddDocuments": 1
}
}
]
}

Output

JSON object containing permissions data

Example:

To get the permissions of node "test3" under path "/test2" of projectnumber b1 for a given group "Asset Managers", give the URL as follows.

http://<host>:port>/ws/rest/service/v1/dm/permission/b1/node/test2/test3/user/Asset%20Managers?usertype=PG

usertype is either 'U' for user or 'PG' for project group.

Response in case of success:

```
"Inheritance": false,
"ApplyToAllSubFolders": false,
"UserPermission": [
{
"Type": "PG",
"GroupName": "Asset Managers",
"FullName": "Asset Managers",
"DocumentPermission": {
"View": 1,
"Move": 1,
"Copy": 1,
"Delete": 1,
"Download": 1,
"ModifyProperties": 1,
"ModifyPermissions": 1,
"AddComments": 1,
"Revise": 1
},
"FolderPermission": {
"View": 1,
"Move": 1,
"Copy": 1,
"Delete": 1,
"ModifyProperties": 1,
"ModifyPermissions": 1,
"CreateSubFolders": 1,
"AddDocuments": 1}}]}
```

Response in case of error:

```
{
"message": ["Invalid user Type. Type is mandatory to identify either a
user or a group"],
"status": 1075
}
```

Add Node Permissions by Node Path and Project Number

`POST /ws/rest/service/v1 /dm/permission/{projectNumber}/node/{node_path}`

Purpose

This service provides the ability to add/update permissions of a node.

Input

Path parameters:

projectnumber: (Optional) project number(if not given, default is company workspace)

node_path : full node_path of the required node.

POST body is a JSON

Request body:

{
"Inheritance": false,
"ApplyToAllSubFolders": false,
"UserPermission": [
{
"Type": "PG",
"GroupName": "Asset Managers",
"FullName": "Asset Managers",
"DocumentPermission": {
"View": 1,
"Move": 1,
"Copy": 1,
"Delete": 1,
"Download": 1,
"ModifyProperties": 1,
"ModifyPermissions": 1,
"AddComments": 1,
"Revise": 1
},
"FolderPermission": {
"View": 1,
"Move": 1,

"Copy": 1,
"Delete": 1,
"ModifyProperties": 1,
"ModifyPermissions": 1,
"CreateSubFolders": 1,
"AddDocuments": 1
}
}
]
}

Output

JSON object containing 'status', 'data', 'message'
Example:
To add permission of a node test3 under node path "/test2" of project b1 give input as follows:
URL: http://<host>:<port>/ws/rest/service/v1/dm/permission/b1/node/test2/test3
Request body:
{
"Inheritance": false,
"ApplyToAllSubFolders": false,
"UserPermission": [
{
"Type": "PG",
"GroupName": "Asset Managers",
"FullName": "Asset Managers",
"DocumentPermission": {
"View": 1,
"Move": 1,
"Copy": 1,
"Delete": 1,
"Download": 1,
"ModifyProperties": 1,
"ModifyPermissions": 1,
"AddComments": 1,

"Revise": 1
},
"FolderPermission": {
"View": 1,
"Move": 1,
"Copy": 1,
"Delete": 1,
"ModifyProperties": 1,
"ModifyPermissions": 1,
"CreateSubFolders": 1,
"AddDocuments": 1
}
}
]
}

Response in case of success:

[{
"message":
["given permissions are added successfully"
],
"status":200
}]

Response in case of error:

[{
"message":
["Invalid user name or user does not have permission to the current project"
],
"status":1076
}]

Update Node Permissions by Node Path and Project Number

```
PUT /ws/rest/service/v1 /dm/permission/{projectNumber}/node/{node_path}
```

Purpose

This service provides the ability to add/update permissions of a node.

Input

Path parameters:

projectnumber: (Optional) project number(if not given, default is company workspace)

node_path : full node_path of the required node.

Output

JSON object containing 'status', 'data', 'message'

Example

To update permission of a node test3 under node path /test2 of project b1, give input as follows:

URL: http://<host>:<port>/ws/rest/service/v1/dm/permission/b1/node/test2/test3

Request Body:

{
"Inheritance": false,
"ApplyToAllSubFolders": false,
"UserPermission": [
{
"Type": "PG",
"GroupName": "Asset Managers",
"FullName": "Asset Managers",
"DocumentPermission": {
"View": 1,
"Move": 1,
"Copy": 1,
"Delete": 1,
"Download": 1,
"ModifyProperties": 1,
"ModifyPermissions": 1,
"AddComments": 1,
"Revise": 1
},
"FolderPermission": {

"View": 1,

"Move": 1,

"Copy": 1,

"Delete": 1,

"ModifyProperties": 1,

"ModifyPermissions": 1,

"CreateSubFolders": 1,

"AddDocuments": 1

}

}

]

}

Response in case success

[{

"message":

["node permissions are updated successfully"

],

"status":200

}]

Response in case error

[{ "message": ["Invalid user name or user does not have permission to the current project"], "status":1076 }]]

Remove Node Permissions by Node Path and Project Number

`PUT /ws/rest/service/v1/dm/permission/{projectNumber}/node/{node_path}/remove`

Purpose

This service allows user to retrieve permissions of a node by node_path and project number.

Input

projectnumber: (Optional) project number(if not given, default is company workspace)

node_path : full node_path of the required node.

Output

Status of the remove permission.

Example:

To remove the permissions of node test3 under "/test2" of projectnumber b1, give the URL as follows.

URL http://<host>:port>/ws/rest/service/v1/dm/permission/b1/node/test2/test3

Response in case of success:

```
[
{
"message":
[ "all permissions removed successfully for this node"
],
"status":200
}]]
```

Response in case of error:

```
[
{
"message":
[ "The given node path does not exist"
],
"status":1074
}]]
```

Remove Node Permissions by Node Path, Project Number, and User or Group

```
PUT
/ws/rest/service/v1/dm/permission/{projectNumber}/node/{node_path}/remo
ve/user/{username}?usertype={usertype}
```

Purpose

This service allows user to retrieve permissions of a node by node_path, project number, user/group name and user Type (either 'U' for user, 'PG' for group)

Input

projectnumber: (Optional) project number(if not given, default is company workspace)

node_path : full node_path of the required node.

username: comma separated user/group names based on usertype. If it is user(user login name should be given, if its group, group name should be given)

usertype: QueryParameter: 'U' for user, 'PG' for group.

Output

Status of the remove permission.

Example:

To remove permissions of node "test3" under node path /test2 of projectnumber b1 for a given group "Asset Managers", give the URL as follows.

http://<host>:port>/ws/rest/service/v1/dm/permission/b1/node/test2/test3/user/Asset%20Managers?usertype=PG

> **Note**: the usertype is either 'U' for user or 'PG' for project group.

Response in case of success:

[{ "message":

["Permissions removed successfully"

],

"status":200

}]]

Response in case of error: if given node path does not exist in the existing permission list:

[{"message":

["The given node path does not exist"

],

"status":1074

}]]

Set Permissions in Document Manager

You can set permissions for files and folders in the Document Manager (DM) by way of the RESTful web services.

Setting permissions to folders and documents in the DM to users or groups through REST Services involves one of the following:

- Granting explicit permissions (calling out a file or folder, specifying user or group name, and granting permissions to those users or groups)
- Inheriting permissions from a parent folder into child files or folders
- Applying (pushing) permissions from a parent folder to sub-folders or files
- Remove users or groups from having permissions to files or folders in the DM through REST Services
- Get permissions on files or folders using REST Services

Authorization

Every V1 REST services includes JWT token in the Authorization header. The integration username and password, which can be created under Company Workspaces > User Administration > Integration User, are required to create this token. Make a GET request to "`/ws/rest/service/v1/login`" service with integration username and password as Basic Authentication.

If the call is successful with 200 response code, then the response will contain the JWT token and the expiry date (The token is valid for 6 months from issuance).

The 401 status code will be returned when the username/password combination is incorrect, the User is not an integration user, or when the User is not active.

Sample Response


```
{
"expiryDate": "2019/01/10 12:00 AM",
"status": 200,
"token":
"eyJ0eXAiOiJEQiJ9.eyJ1c2VybmFtZSI6IiQkaW50ZWdyYXRpb25icCJ9.2F17ECA4-F553-DF21-BD3F-389AE3680675C80772B0EBF7BAD220BF36BA611BB6A5"
}
```


All Rest Services must have the following set in the Header.

Header Sample

Key	Value
Authorization	Bearer eyJ0eXAiOiJEQiJ9.eyJ1c2VybmFtZSI6IiQkaW50ZWdyYXRpb25icCJ9.2F17ECA4-F553-DF21-BD3F-389AE3680675C80772B0EBF7BAD220BF36BA611BB6A5

Note: The same authorization token can be re-used for subsequent Rest Service requests, until the expiry date.

Granting, Inheriting, and Pushing permissions to files or folders

Users can use REST Services to call out a file or folder in the DM (Company, Shell, or Project), specify names of the users or groups at that location, and *grant* any (or all) of the existing permissions (users or groups) available in the UI for that file or folder.

Users can grant permissions to a file or folder in REST Services by stating that a file or folder "Inherit permissions from the parent folder."

If a user states that a file or folder "Inherit permissions from the parent folder" and also calls user or group names and grants permissions to those individually, then the "Inherit permissions from the parent folder" setting will take precedence and the manually called out permissions will be ignored.

Users can call out a folder and grant permissions to files or folders located within the folder by stating in the REST Services: "Apply these permissions to documents and sub-folders."

Removing Permissions to Files or Folders

Users can use REST Services to call out a file or folder in the DM (Company, Shell, or Project), specify names of the users or groups at that location, and *delete* any (or all) of the existing permissions (users or groups) available in the UI for that file or folder.

You can remove users or groups from permissions through REST Services only if the **Inherit permissions from the parent folder** option is not selected. If this option is selected, then the remove of users or groups will not go through. You can change the inherit permissions condition (on a file or folder by) by clearing the **Inherit permissions from the parent folder** through REST Services.

Get Permissions on Files or Folders

You can use REST Services to get permissions on a file or folder located in the DM.

Business Processes

Ensure that the integration user has the required Business Process Permissions.

If a BP has integration option, then that BP can use BP services.

> **Note:** By design, there are no web services available for the Request for Bid (RFB) business process.

Fetch BP Record List

POST /ws/rest/service/v1/bp/records/{project_number}

Purpose

Get all list of record in of a specific BP in a shell based on shell number or from Company level if project/shell number is not provided.

The input JSON shall provide various options to be considered for fetching the data.

Input

All parameters should be URL encoded.

Path Parameter

project_number: Specify the Project number in which the records exists; if not provided, then records are considered to be fetched from Company Level.

filter_condition

```
{
    "bpname" : "Vendors",
    "lineitem" : "yes",
    "lineitem_fields" : " uuu_tab_id;title",
    "filter_condition" : "status=Active",
    "record_fields" : "uuu_user_id;uuu_record_last_update_date"
}
```

POST body is a JSON, POST call has input & output both as JSON in the body.

The "bpname" is mandatory.

The "record_fields" (optional) is list of fields. That is to state: The data element names in the record upper form, only those fields (along with record_no) will be listed out in result.

The "lineitem_fields"(optional) is list of fields in the record lineitem form (only those fields will be listed out in the result).

The "lineitem" values "yes' or "no", default "yes," if not provided. If "no," then the record lineitem details will not be fetched in the result.

The "filter_condition" (optional) is the condition on the record level. The records which satisfy that criteria will be fetched. Only the "=" (equal) condition is supported.

Filter Criteria

BP Record list can be filtered further using filter_criteria,

- Text, String = Pattern matching
- Number, Cost = Ranges and arithmetic / logical operators
- Date = Ranges

"filter_criteria" should be added in POST data.

filter_criteria

```
{
    "bpname" : "Vendors",
    "lineitem" : "yes",
    "lineitem_fields" : "uuu_tab_id;title",
    "record_fields" : "uuu_user_id;uuu_record_last_update_date",

    "filter_criteria":{
        "join":"OR",
        "filter":[
            {
                "field":"record_no",
```

```
                "value":"VEN",
                "condition_type":"like"
            },
            {
                "field":"status",
                "value":"Active",
                "condition_type":"eq"
            },
            {
                "field":"uuu_file_title",
                "value":"first document title",
                "condition_type":"like"
            },
            {
                "field":"uuu_file_issue_date",
                "value":"12-07-2017 07:54:00",
                "value2":"05-07-2018",
                "condition_type":"range"
            }
        ]
    }
}
```

filter_criteria Key Definitions

1) The "join": (optional) Specify if the filter condition has to be combined using OR or AND operator. Default is AND.
2) The "filter": List of filter conditions. Each condition will have "field", "value" ("value2" if condition_type is range) and condition_type.
   - The "field": BP form DE name for which the filter condition has to be applied.
   - The "value": value for the DE to filter the data.
   - The "value2": second value for the range condition. Not required to be specified for other conditions.
   - The "condition_type": the filter condition that needs to be applied.

Possible value for condition_type

condition_type	Notes	Supported Data Element Types
like	For string data types. The value can contain the SQL wildcard characters when like is specified.	Text (String)
eq	For string, numeric and date data type. Will perform the exact match.	Text (String), Number, Cost, Date
lt	For numeric values. Will perform less than value.	Number, Cost, Date
gt	For numeric values. Will perform greater than value.	Number, Cost, Date
lteq	For numeric values. Will perform less than or equal value.	Number, Cost, Date
gteq	For numeric values. Will perform greater than or equal value.	Number, Cost, Date
neq	For numeric values. Will perform not equal value.	Text (String), Number, Cost, Date
range	Numeric, Date values. Will perform range search between value and value2.	Number, Cost, Date

Note: The **Input Date** fields should be provided in "MM-dd-yyyy HH:mm:ss" or ""MM-dd-yyyy" format in **filter_criteria**.

Earlier "filter_condition" (optional) is still supported, and it is the condition on the record level, records which satisfy that criteria will be fetched.

If both "filter_condition" and "filter_criteria" are provided together then It will be "AND" condition between "filter_condition" and "filter_criteria".

Output

JSON object containing 'status', 'data', 'message'

A message will be present if status is not 200; otherwise, it will be "success".

The below funding details for general spends, payment application, or generic cost BPs will be present in the response

- unassigned_amount
- fund (JSON array containing below)
  - code
  - fund_balance
  - assigned_amount

Note: If an integration interface is defined for the BP, all the fields defined in the interface will be sent in the response. If an integration interface is not defined, all the custom-defined fields will be sent in response.

Get BP list Sample Response


```
{
  "data":
  [
    {
      "uuu_user_id":"a@abc.com",
      "uuu_record_last_update_date":"2018/04/23 11:06",
      "_bp_lineitems":
      [
        {
          "uuu_tab_id":"List of Contacts",
          "li_num":1,
          "title":"t"
        }
      ],
      "record_no":"VEN-0023"
    },
    {
      "uuu_user_id":"a@abc.com",
      "uuu_record_last_update_date":"2018/05/28 04:34",
      "_bp_lineitems":
      [
        {
          "uuu_tab_id":"List of Contacts",
          "li_num":1,
          "title":"t"
        },
        {
          "uuu_tab_id":"List of Contacts",
          "li_num":2,
```

```
          "title":"t"
        }
      ],
      "record_no":"VEN-0024"
    }
  ],
  "message":
  [ "success"
  ],
  "status":200
}
```

Sample Response With Fund Details

```
// For lineitem and CBS assignment rule
{
  "data": [
    {
      "amount": 140,
      "_bp_lineitems": [
        {
          "uuu_quantity": 1,
          "amount": 10,
          "group_id": 0,
          "bItemID": "1_D_D~~1_D_D",
          "uuu_tab_id": "Standard",
          "uuu_unit_price": 10,
          "short_desc": "a1",
          "li_num": 1,
          "unassigned_amount":20.30
          "funds": [
            {
              "code": "City Funding",
              "fund_balance": 790,
              "assigned_amount":20
```

```
        },
        {
          "code": "State Funding",
          "fund_balance": 3500,
          "assigned_amount":560
        }
      ]
    },
    {
      "uuu_quantity": 2,
      "amount": 40,
      "group_id": 0,
      "bItemID": "2_D_D~~2_D_D",
      "uuu_tab_id": "Standard",
      "uuu_unit_price": 20,
      "short_desc": "a2",
      "li_num": 2
    },
    {
      "uuu_quantity": 3,
      "amount": 90,
      "group_id": 0,
      "bItemID": "1_D_D~~1_D_D",
      "uuu_tab_id": "Standard",
      "uuu_unit_price": 30,
      "short_desc": "a3",
      "li_num": 3
    }
  ],
  "record_no": "uxcost5-0010",
  "due_date": null,
  "title": "multiple li 2",
  "status": "Pending"
}
```

```
  ],
  "message": [
    "success"
  ],
  "status": 200
}

//For record level assignment rule
{
  "data": [
    {
      "amount": 51600,
      "unassigned_amount":7000,
      "funds": [
        {
          "code": "City Funding",
         "fund_balance": 3500,
         "assigned_amount":560
        },
        {
          "code": "State Funding",
          "fund_balance": 3500,
          "assigned_amount":560
        }
      ],
      "_bp_lineitems": [
        {
          "uuu_quantity": 50,
          "amount": 50000,
          "uuu_effective_date": null,
          "group_id": 0,
          "bItemID": "1_D_D~~1_D_D",
          "uuu_tab_id": "Standard",
```

```
          "upaItemUnitPrice": 1000,
          "short_desc": "short desc 1",
          "li_num": 1
        },
        {
          "uuu_quantity": 4,
          "amount": 1600,
          "uuu_effective_date": null,
          "group_id": 0,
          "bItemID": "1_D_D~~1_D_D",
          "uuu_tab_id": "Standard",
          "upaItemUnitPrice": 400,
          "short_desc": "short desc 2",
          "li_num": 2
        }
      ],
      "record_no": "uxcost4-0004",
      "due_date": null,
      "refid": "uxcost1-0001",
      "title": null,
      "status": "Approved"
    }
  ],
  "message": [
    "success"
  ],
  "status": 200
}
```


Get BP Record

GET /ws/rest/service/v1/bp/record/{project_number}

Purpose

Get a record in of a specific BP in a shell based on shell number or from Company level if project/shell number is not provided.

The input JSON shall provide various options to be considered for fetching the data

Input

All parameters should be URL encoded.

Path Parameter

project_num: Specify the Project number in which the records exists; if not provided, then records are considered to be fetched from Company Level.

GET URL Parameter

```
input =
 {
    "bpname" : "Vendors",
    "record_no" : "VEN-0023",
    "lineitem":"yes"
 }
 Here "record_no" and "bpname" are mandatory input parameter.
 The "lineitem" is by default "yes", if not provided.
```

Output

JSON object containing 'status', 'data', 'message'

message will be present if status is not 200; otherwise, it will be "success".

> **Note**: If Integration interface is defined for that BP. All fields defined in this interface will be sent in the response.

If Integration interface is not defined, then all Custom defined Fields will be sent in response.

Get BP Sample Response

```
{
  "data":
  [
    {
      "uuu_user_id":"a@abc.com",
      "uuu_record_last_update_date":"2018/04/23 11:06",
      "uveFaxTB16":null,
      "uveCertificateNoTB64":null,
```

```
"uvePrimaryContactTB64":"a",
"title":"v-00101",
"uveLicenseNoTB16":null,
"uuu_contact_company":"v-00101",
"uveCOIAmoutCA":0.0,
"_bp_lineitems":
[
  {
    "uirCntctFstNmTB":"a",
    "uuu_user_workphone":null,
    "uuu_tab_id":"List of Contacts",
    "title":"t",
    "ugenAddress1TXT120":null,
    "ugenAddress2TXT120":null,
    "ugenCountryPD":null,
    "ugenCityTXT50":null,
    "short_desc":"Vendor Contact",
    "li_num":1,
    "uriCntctLstNmTB":"b",
    "ugenStatePD":null,
    "ugenZipCodeTXT16":null,
    "uveEmailTB120":null,
    "ugenAddress3TXT120":null
  }
],
"uvePolicyNoTB32":null,
"record_no":"VEN-0023",
"uveVendorTypePD":"Architect",
"ugenCityTXT50":null,
"uveCoiExpDOP":null,
"uuu_dm_publish_path":"v_path",
"uuu_contact_last_name":"b",
"ugenZipCodeTXT16":null,
"uveEmailTB120":"a@abc.com",
```

```
      "ugenAddress3TXT120":null,
      "uveReferenceIdTB16":null,
      "uuu_creation_date":"2018/04/12 09:01",
      "ugenRemarksTB4000":null,
      "uvePhoneTB64":null,
      "uveTaxIDTB16":null,
      "uveMinorityBusCB":0,
      "uveInsuranceCoTB32":null,
      "ugenExpirationDateDOP":null,
      "uveWomanOwnedCB":0,
      "uveVendorNameTB50":"v-00101",
      "ugenAddress1TXT120":null,
      "uveDisadvantagedBusCB":0,
      "ugenDiscipline":null,
      "creator_id":"Company Administrator",
      "ugenAddress2TXT120":null,
      "ugenCountryPD":null,
      "uveVendorIDTB16":"v-00101",
      "ugenStatePD":null,
      "uuu_contact_first_name":"a",
      "status":"Active"
    }
  ],
  "message":
  [ "success"
  ],
  "status":200
}
```


The following funding information for general spends, payment application, or generic cost BPs will be present in the response:

- unassigned_amount
- fund (JSON array containing below)
  - code
  - fund_balance

- assigned_amount

Get BP Record With Attachments

GET /ws/rest/service/v1/bp/record/file/{project_number}

Purpose

Get a record detail and all the attachments in the record and its lineitem and general comments, based on input parameter, of a specific BP in a shell based on shell number or from Company level if project/shell number is not provided.

The input JSON shall provide various options to be considered for fetching the data

Input

All parameters should be URL encoded.

Path Parameter

project_num: Specify the Project number in which the records exists; if not provided, then records are considered to be fetched from Company Level.

GET URL Parameter

```
input =
 {
     "bpname":"Vendors",
     "record_no":"VEN-0024",
     "lineitem":"yes",
     "lineitem_file":"yes",
     "general_comments":"yes"
    "attach_all_publications":"yes"
  }
```

The "record_no" and "bpname" are mandatory input parameters.

The "lineitem" values "yes" or "no"; default is "yes", if not provided.

The "lineitem_file" values "yes" or "no"; default is "yes", but if "lineitem" is "no" then "lineitem_file" will be considered "no".

The "lineitem_file" input parameter is decided if lineitem attachments will be download or not.

The "general_comments" is for having general comment data in response along with its attachment; by default, it is "yes".

The "attach_all_publications" is for downloading all the publications/revisions for file attached; by default, it is "no".

Output

JSON object containing 'status', 'data', 'message'

A message will be present if status is not 200; otherwise, it will be "success".

Record data will be part of response field "record_data", and record level attachments will always return in response.

Attachments will be part of response field "file_handler", which is base64 encoded zip file String and should be decoded with base64 decoder application or online decoder, for example: `https://www.base64decode.org/`

The file name is outermost "file_name" field in response.

If multiple revision or publication of file is attached, then attachment detail in response will contain all the publications; however, the file with latest publication will be part of downloaded attachment.

To download all the publication/revisions of file attached in record, set "attach_all_publications" in input JSON. It will get all publications from Record upper and detail forms only.

Output Folder Structure

zip_file

```
           |
               +-- attachments
               |            |
               |            +-- files attached to record ( upper form )
               |            |
               |            +-- lineitem_<lineitem number>
               |                                        |
               |                                        +-- files
attached to lineitem
               |
               +-- gc_attachments ( general comment attachments )
               |
               +-- comment_<comment number>
                                      |
                                      +-- files attached to comment
```

Output Folder structure when "attach_all_publications" is "yes"

zip_file

```
      |
        +-- attachments
```

```
        |            |
        |            +-- publication_<publication number>
        |            |             |
        |            |            +-- files attached to record which has
same publication number as in parent folder suffix
        |            |
        |            +-- lineitem_<lineitem number>
        |                         |
        |                        +-- publication_<publication number>
        |                                              |
        |                                             +-- files attached to
lineitem which has same publication number as in parent folder suffix
        |
       +-- gc_attachments ( general comment attachments )
                    |
                    +-- comment_<comment number>
                                  |
                                  +-- files attached to comment
```

Note: If Integration interface is defined for that BP. All fields defined in this interface will be sent in the response.

If the integration interface is not defined, then all Custom defined Fields will be sent in response.

Get BP with attachment Sample Response


```
{
   "data":[
      {
         "record_data":{
            "uuu_user_id":"a@abc.com",
            "uuu_record_last_update_date":"2018/05/28 04:34",
            "uveFaxTB16":null,
            "uveCertificateNoTB64":null,
            "uvePrimaryContactTB64":"a",
            "title":"v-00024",
            "uveLicenseNoTB16":null,
            "_general_comments":[
```

```
{
   "firstname":"Company",
   "comment_state":"Active",
   "create_date_iso":"2018-05-28T04:34",
   "page_num":"0",
   "lastmodified_iso":"2018-05-28T04:34",
   "shortname":"idc",
   "content":"\nNew attach comment",
   "has_annotation":"0",
   "lastname":"Administrator",
   "attachment":{
      "issue_date":null,
      "revision_no":null,
      "file_name":"27362157.jpg",
      "publication_no":1,
      "title":null,
      "file_size":201571
   },
   "companyname":"idc",
   "attachment_id":"0",
   "fullname":"Company Administrator",
   "create_date":[
      "05-28-2018 04:34:55",
      "05-28-2018 04:34:55"
   ],
   "attachment_count":"1"
},
{
   "firstname":"Company",
   "comment_state":"Active",
   "create_date_iso":"2018-05-28T04:07",
   "page_num":"0",
   "lastmodified_iso":"2018-05-28T04:07",
   "shortname":"idc",
```

```
            "content":"\nThis is a wonderful general comment",
            "has_annotation":"0",
            "lastname":"Administrator",
            "companyname":"idc",
            "attachment_id":"0",
            "fullname":"Company Administrator",
            "create_date":[
               "05-28-2018 04:07:03",
               "05-28-2018 04:07:03"
            ],
            "attachment_count":"0"
         }
      ],
      "uuu_contact_company":"v-00024",
      "uveCOIAmoutCA":0.0,
      "_bp_lineitems":[
         {
            "uirCntctFstNmTB":"a",
            "uuu_user_workphone":null,
            "uuu_tab_id":"List of Contacts",
            "title":"t",
            "ugenAddress1TXT120":null,
            "attachment":[
               {
                  "reference":"NO",
                  "issue_date":null,
                  "revision_no":null,
                  "file_name":"sample_upload_1.pdf",
                  "publication_no":1,
                  "title":null,
                  "create_date":"2018/05/21 19:39",
                  "file_size":83768
               }
            ],
```

```
        "ugenAddress2TXT120":null,
        "ugenCountryPD":null,
        "ugenCityTXT50":null,
        "short_desc":"Vendor Contact",
        "li_num":1,
        "uriCntctLstNmTB":"b",
        "ugenStatePD":null,
        "ugenZipCodeTXT16":null,
        "uveEmailTB120":null,
        "ugenAddress3TXT120":null
    },
    {
        "uirCntctFstNmTB":"a",
        "uuu_user_workphone":null,
        "uuu_tab_id":"List of Contacts",
        "title":"t",
        "ugenAddress1TXT120":null,
        "attachment":[
            {
                "reference":"NO",
                "issue_date":null,
                "revision_no":null,
                "file_name":"sample_upload_1.pdf",
                "publication_no":0,
                "title":null,
                "create_date":"2018/05/21 19:39",
                "file_size":83768
            },
            {
                "reference":"NO",
                "issue_date":null,
                "revision_no":null,
                "file_name":"sample_upload_2.pdf",
                "publication_no":1,
```

```
                "title":null,
                "create_date":"2018/05/21 19:39",
                "file_size":83768
             }
          ],
          "ugenAddress2TXT120":null,
          "ugenCountryPD":null,
          "ugenCityTXT50":null,
          "short_desc":"Vendor Contact",
          "li_num":2,
          "uriCntctLstNmTB":"b",
          "ugenStatePD":null,
          "ugenZipCodeTXT16":null,
          "uveEmailTB120":null,
          "ugenAddress3TXT120":null
       }
    ],
    "attachment":[
       {
          "reference":"NO",
          "issue_date":null,
          "revision_no":null,
          "file_name":"sample_upload_3.pdf",
          "publication_no":1,
          "title":null,
          "create_date":"2018/05/21 19:39",
          "file_size":83768
       },
       {
          "reference":"NO",
          "issue_date":null,
          "revision_no":null,
          "file_name":"sample_upload_3.pdf",
          "publication_no":2,
```

```
            "title":null,
            "create_date":"2018/05/27 23:55",
            "file_size":83768
         }
      ],
      "uvePolicyNoTB32":null,
      "record_no":"VEN-0024",
      "uveVendorTypePD":"Architect",
      "ugenCityTXT50":null,
      "uveCoiExpDOP":null,
      "uuu_dm_publish_path":"v_path",
      "uuu_contact_last_name":"b",
      "ugenZipCodeTXT16":null,
      "uveEmailTB120":"a@abc.com",
      "ugenAddress3TXT120":null,
      "uveReferenceIdTB16":null,
      "uuu_creation_date":"2018/04/19 02:13",
      "ugenRemarksTB4000":null,
      "uvePhoneTB64":null,
      "uveTaxIDTB16":null,
      "uveMinorityBusCB":0,
      "uveInsuranceCoTB32":null,
      "ugenExpirationDateDOP":null,
      "uveWomanOwnedCB":0,
      "uveVendorNameTB50":"v-00024",
      "ugenAddress1TXT120":null,
      "uveDisadvantagedBusCB":0,
      "ugenDiscipline":null,
      "creator_id":"Company Administrator",
      "ugenAddress2TXT120":null,
      "ugenCountryPD":null,
      "uveVendorIDTB16":"v-00024",
      "ugenStatePD":null,
      "uuu_contact_first_name":"a",
```

```
            "status":"Active"
         },
         "file_name":"uv_VEN-0024_0_attachments.zip",
         "file_handler":" base64 encoded zip file "
      }
   ],
   "message":[
      "success"
   ],
   "status":200
}
```


The following funding information for general spends, payment application, or generic cost BPs will be present in the response:

- unassigned_amount
- fund (JSON array containing below)
  - code
  - fund_balance
  - assigned_amount

Create BP Record

POST /ws/rest/service/v1/bp/record/{project_number}

Purpose

Create a record in a specific BP in a shell based on shell number or from Company level if project/shell number is not provided.

The input JSON shall provide various options to be considered for fetching the data.

Input

All parameters should be URL encoded.

Path Parameter

project_number: Specify the Project number in which the records exists; if not provided, then records are considered to be from Company Level.

POST body is a JSON

> **Note**: POST call has input & output both as JSON in the body.


```
{
```

```
"options": {
    "bpname": "Vendors",
    "workflow_details":
    {
        "workflow_name": "workflow_name",
        "user_name" : "first_name  last_name",
        "action_name" : "action_name"
    }
},
"data": [
        {
            "record_no":"hello",
            "uuu_user_id": "a@abc.com",
            "uuu_record_last_update_date": "04-12-2018",
            "uveFaxTB16": null,
            "uveCertificateNoTB64": null,
            "uvePrimaryContactTB64": "a",
            "title": "v-00101",
            "uveLicenseNoTB16": null,
            "uuu_contact_company": "v-00101",
            "uveCOIAmoutCA": 0,
            "_bp_lineitems": [
                {
                    "uirCntctFstNmTB": "a",
                    "uuu_user_workphone": null,
                    "uuu_tab_id": "List of Contacts",
                    "title": "t",
                    "ugenAddress1TXT120": null,
                    "ugenAddress2TXT120": null,
                    "ugenCountryPD": null,
                    "ugenCityTXT50": null,
                    "short_desc": "Vendor Contact",
                    "uriCntctLstNmTB": "b",
                    "ugenStatePD": null,
```

```
            "ugenZipCodeTXT16": null,
            "uveEmailTB120": "hello@abc.com",
            "ugenAddress3TXT120": null
        }
    ],
    "uvePolicyNoTB32": null,
    "uveVendorTypePD": "Architect",
    "ugenCityTXT50": null,
    "uveCoiExpDOP": null,
    "uuu_dm_publish_path": "v_path",
    "uuu_contact_last_name": "b",
    "ugenZipCodeTXT16": null,
    "uveEmailTB120": "a@abc.com",
    "ugenAddress3TXT120": null,
    "uveReferenceIdTB16": null,
    "uuu_creation_date": "04-12-2018",
    "ugenRemarksTB4000": null,
    "uvePhoneTB64": null,
    "uveTaxIDTB16": null,
    "uveMinorityBusCB": 0,
    "uveInsuranceCoTB32": null,
    "ugenExpirationDateDOP": null,
    "uveWomanOwnedCB": 0,
    "uveVendorNameTB50": "v-00101",
    "ugenAddress1TXT120": null,
    "uveDisadvantagedBusCB": 0,
    "ugenDiscipline": null,
    "creator_id": "Company Administrator",
    "ugenAddress2TXT120": null,
    "ugenCountryPD": null,
    "uveVendorIDTB16": "v-00101",
    "ugenStatePD": null,
    "uuu_contact_first_name": "a",
    "status": "Active"
```

```
            }
        ]
}
```

If "record_no" is not provided, then auto-generated record_no will be assigned to record. If unique "record_no" is provided, then record will be created be given record_no.

- "bpname" is mandatory and is part of options form parameter.
- If "workflow_details" is not specified, then the fall back will be the auto-creation settings defined on the BP Setup.
- If specified, then all the three params - user_name, workflow_name and action_name are mandatory.
- Validations Performed:
  - If the user is a valid active user in the project.
  - Workflow name is valid and active.
  - User is an assignee (user/group) on the creation step of the workflow.
  - Action name is valid outgoing link from the creation step.
  - Error messages:
    - Enter a valid or an active user. (Missing key or invalid user name)
    - The workflow name is not valid. (Missing key or invalid/inactive workflow name)
    - The user does not have an active workflow template. (User is not an assignee on the creation step)
    - The workflow action name is not valid. (Missing key or invalid outgoing action name from creation step)

Output

JSON object containing 'status', 'data', 'message.'

A message will be present if status is not 200.

Status codes are:

1> 200 OK, if all creation succeeds.

2> 3000, If any of records creation fail.

Create BP Sample Response

```
{
    "data": [],
    "message": [
        {
                "_record_status": "success",
                "uuu_user_id": "a@abc.com",
                "uuu_record_last_update_date": "04-12-2018",
```

```
"uveFaxTB16": null,
"uveCertificateNoTB64": null,
"uvePrimaryContactTB64": "a",
"title": "v-00101",
"uveLicenseNoTB16": null,
"uuu_contact_company": "v-00101",
"uveCOIAmoutCA": 0,
"_bp_lineitems": [
    {
        "uirCntctFstNmTB": "a",
        "uuu_user_workphone": null,
        "uuu_tab_id": "List of Contacts",
        "title": "t",
        "ugenAddress1TXT120": null,
        "ugenAddress2TXT120": null,
        "ugenCountryPD": null,
        "ugenCityTXT50": null,
        "short_desc": "Vendor Contact",
        "uriCntctLstNmTB": "b",
        "ugenStatePD": null,
        "ugenZipCodeTXT16": null,
        "uveEmailTB120": "hello@abc.com",
        "ugenAddress3TXT120": null
    }
],
"uvePolicyNoTB32": null,
"record_no": "hello",
"_attachment": [
    {
        "file_name": "new 1.txt"
    }
],
"uveVendorTypePD": "Architect",
"ugenCityTXT50": null,
```

```
                "uveCoiExpDOP": null,
                "uuu_dm_publish_path": "v_path",
                "uuu_contact_last_name": "b",
                "ugenZipCodeTXT16": null,
                "uveEmailTB120": "a@abc.com",
                "ugenAddress3TXT120": null,
                "uveReferenceIdTB16": null,
                "uuu_creation_date": "04-12-2018",
                "ugenRemarksTB4000": null,
                "uvePhoneTB64": null,
                "uveTaxIDTB16": null,
                "uveMinorityBusCB": 0,
                "uveInsuranceCoTB32": null,
                "ugenExpirationDateDOP": null,
                "uveWomanOwnedCB": 0,
                "uveVendorNameTB50": "v-00101",
                "ugenAddress1TXT120": null,
                "uveDisadvantagedBusCB": 0,
                "ugenDiscipline": null,
                "creator_id": "Company Administrator",
                "ugenAddress2TXT120": null,
                "ugenCountryPD": null,
                "uveVendorIDTB16": "v-00101",
                "ugenStatePD": null,
                "uuu_contact_first_name": "a",
                "status": "Active"
            }
    ],
    "status": 200
}
in case of any error :
{
    "data": [],
    "message": [
```

```
        {
            "_record_status": "Error Business Process record_no hello
already exists. ",
            "record": {
                "uuu_user_id": "a@abc.com",
                "uuu_record_last_update_date": "04-12-2018",
                "uveFaxTB16": null,
                "uveCertificateNoTB64": null,
                "uvePrimaryContactTB64": "a",
                "title": "v-00101",
                "uveLicenseNoTB16": null,
                "uuu_contact_company": "v-00101",
                "uveCOIAmoutCA": 0,
                "_bp_lineitems": [
                    {
                        "uirCntctFstNmTB": "a",
                        "uuu_user_workphone": null,
                        "uuu_tab_id": "List of Contacts",
                        "title": "t",
                        "ugenAddress1TXT120": null,
                        "ugenAddress2TXT120": null,
                        "ugenCountryPD": null,
                        "ugenCityTXT50": null,
                        "short_desc": "Vendor Contact",
                        "uriCntctLstNmTB": "b",
                        "ugenStatePD": null,
                        "ugenZipCodeTXT16": null,
                        "uveEmailTB120": "hello@abc.com",
                        "ugenAddress3TXT120": null
                    }
                ],
                "uvePolicyNoTB32": null,
                "record_no": "hello",
                "_attachment": [
```

```
                {
                    "file_name": "new 1.txt"
                }
            ],
            "uveVendorTypePD": "Architect",
            "ugenCityTXT50": null,
            "uveCoiExpDOP": null,
            "uuu_dm_publish_path": "v_path",
            "uuu_contact_last_name": "b",
            "ugenZipCodeTXT16": null,
            "uveEmailTB120": "a@abc.com",
            "ugenAddress3TXT120": null,
            "uveReferenceIdTB16": null,
            "uuu_creation_date": "04-12-2018",
            "ugenRemarksTB4000": null,
            "uvePhoneTB64": null,
            "uveTaxIDTB16": null,
            "uveMinorityBusCB": 0,
            "uveInsuranceCoTB32": null,
            "ugenExpirationDateDOP": null,
            "uveWomanOwnedCB": 0,
            "uveVendorNameTB50": "v-00101",
            "ugenAddress1TXT120": null,
            "uveDisadvantagedBusCB": 0,
            "ugenDiscipline": null,
            "creator_id": "Company Administrator",
            "ugenAddress2TXT120": null,
            "ugenCountryPD": null,
            "uveVendorIDTB16": "v-00101",
            "ugenStatePD": null,
            "uuu_contact_first_name": "a",
            "status": "Active"
        }
    }
```

```
    ],
    "status": 3000
}
```

Update BP Record

PUT /ws/rest/service/v1/bp/record/{project_number}

Purpose

Update record in a specific BP in a shell based on shell number or from Company level if project/shell number is not provided. The input JSON provides various options to be considered for fetching the data.

Input

All parameters should be URL encoded.

Path Parameter

project_number: Specify the Project number in which the records exists; if not provided, then records are considered to be from Company Level.

PUT

```
{
        "options":{
            "bpname":"line6",
            "LineItemIdentifier":"upwoLISAS",
            "workflow_details" :
            {
               "WFCurrentStepName":"Step 4",
               "WFActionName":"Line 3",
            }
        },
        "data": [
            {
                "ugenUserIDPK":null,
                "_bp_lineitems":
                [
                    {
                    "ugenShellPK":"/AP1",
                    "uuu_tab_id":"Standard",
                    "short_desc":"desc3_m11",
                    "upwoLISAS":"0001",
                    "uuu_line_item_status":"Active"
```

```
                }
            ],
            "record_no":"uxli6-0020",
            "title":"new title"
        }
        ]
}
```

Notes:

- Auto-Creation setting is mandatory in Shell or Company BP Setup in Admin mode.
- The "record_no" is mandatory and is part of data.
- The "bpname" is mandatory and is part of options form parameter.
- The WFCurrentStepName and WFActionName are part of the "workflow_details" and are for Workflow-type BPs. If the values for the WFCurrentStepName and WFActionName are provided, then the record will be updated and sent to the next step of the workflow. If the values for the WFCurrentStepName and WFActionName are not provided, then the record will be updated but will remain in same workflow step.
- The LineItemIdentifier is a part of options form parameter. The LineItemIdentifier value will be the DE name present in the lineItem. The DE name present in the lineItem should be present in the "data" (input record JSON) with its value.
- When you update a record using this REST service to add standard lines, do not include LineItemIdentifier as part of the options in the request. Updating the standard lines in a Payment Application BP is not currently supported.
- The "Enable Step for Integration" option in the Workflow BP setup is not available for the REST integration.

Steps to add LineItemIdentifier in the BP design:

1) Create a custom DE with DD: Sys Auto Sequence.
2) Add this DE to the Detail Form of the BP with the line items that need to be updated.
3) Navigate to the Company Workspace > Admin mode > Business Processes and open the BP.
4) Click Open drop-down to open and select Data Elements to open the Data Elements Configuration window.
5) Click the Auto Sequence tab and click Add.
6) Select the data element added in the Detail Form and select the level as: Per Record.
7) Provide the start value and click Create.
8) Add the parameter "Sys Sequence counter" and click OK.
9) Add the DE to Integration > Detail.

10) Set the "Direction" to "Both" for that DE.

11) Complete and deploy the BP.

12) In the body of the request, add the DE name as Lineitem identifier and send the request.

Delete the Line-Item, using Update Request

To delete the line-Item using update request, the field "_delete_line_item" should be used (value of which will be comma separated values of LineItemIdentifier DE) as shown in the following example:

Sample: Delete line-item input

```
{
                    "options": {
                   "bpname":"line6",
                  "LineItemIdentifier":"upwoLISAS"
                  },
                 "data": [
                {
                    "ugenUserIDPK":null,
                    "_delete_bp_lineitems":"0002,0001,0003",
                    "record_no":"uxli6-0021",
                    "title":"title_m112244"
               }
           ]
      }
```

Note: PUT call has input & output, both as JSON in the body.

Output

JSON object containing 'status', 'data', 'message'

A message will be present if status is not 200 .

Status codes are:

1>200 OK, if all update succeeds .

2>3000, if any of records update fails.

Update BP Sample Response

```
{
    "data": [],
    "message": [
        {
            "_record_status": "success",
```

```
            "record": {
                "ugenUserIDPK": null,
                "record_no": "uxli6-0021",
                "title": "title_m112244"
            }
        }
    ],
    "status": 200
}
```

An Integration user can modify the Fund Code for an existing record line items, by using `UpdateBPRecord` call.

A user can see the Fund Code for an existing record line items being updated and the line item amount is rolled up to the Fund Sheet, based on updated Fund Code.

Additional Information

The "record_no" is mandatory, and it is a part of data for the `UpdateBPRecord` call.

The "bpname" is mandatory, and it is a part of options form parameter.

The "WFCurrentStepName" and "WFActionName" are part of the "workflow_details," and they are for Workflow type BPs.

If the values for "WFCurrentStepName" and "WFActionName" are provided, then the record will be updated and sent to the next step of workflow.

If the values for "WFCurrentStepName" and "WFActionName" are not provided, then the record will be updated but will remain in the same workflow step.

The "LineItemIdentifier" is a part of options form parameter. The "LineItemIdentifier" value will be the DE name that is present in the "lineItem." The DE is present in the "data" (input record JSON) along with its value.

In the "_bp_lineitems" section, if "row_id" is modified along with other attributes, then update the Fund Code for the line item in the "data" (with the "Lineitemidentifier" specified).

Any auto-populate DEs that are based on the "row_id" (Fund Code) will be populated by means of the update.

Formulas based on auto-populate DES will be evaluated in the line item.

When a record is routed to next step for workflow BPs, if the "work_flow" details are specified, then verify that in the Fund sheet the line item amount is rolled up to the modified Fund Code.

The rules that are based on the Fund Code will be evaluated when routing the record through the "UpdateBPRecord" call.

For non-workflow Fund BP, if in the input request the status is specified along with the Fund Code in the line item, upon successful request the existing line item will be updated with the specified Fund Code, and the Fund Sheet will show the line item amount against the modified Fund Code.

> **Note:** For the line item with both Fund Code and CBS Code BPs, only the Fund Code for the existing line items can be modified, by using the "UpdateBPRecord" call.

Editing the Due Date (due_date) Field

In the **Workflow Settings** field in the **Workflow Setup** of a BP, if the option **Override Workflow Due Date** field set as **Yes**, then you *can edit* the due date in the creation step.

In the **Workflow Settings** field in the **Workflow Setup** of a BP, if the option **Override Workflow Due Date** field set as **No**, then you *cannot edit* the due date in the creation step.

Also, you cannot edit the Due Date if:

- The work has started.
- The work has moved to the next step (is in-flight) in the workflow process.

Data Elements in Line Items

If the following Data Elements are present in the Line Items, they will not be updated during UpdateBPRecord call.

- `bitemid`
- `budgetid`
- `sovitemid`
- `uuu_cm0_picker`
- `xid`
- `ds_code`
- `fsm_lineitem_id`
- `asm_lineitem_id`
- `uuu_lat`
- `uuu_long`
- `uuu_company_account_name`
- `uuu_company_account_code`
- `uuu_company_acc_codepicker`
- `uuu_activity_picker`
- `uuu_asset_picker`
- `ref_bpo_lineitem`
- `ref_bpo`
- `ref_rfb`
- `refid`
- `uuu_sovlinum`
- `otherCompanyID`
- `uuu_costcode_picker`

- scheduled_value
- uuu_asset_cum_depreciation
- uuu_asset_curr_period_dep
- uuu_asset_net_book_value
- uuu_unit_price
- currencyid
- due_date
- uuu_asset_calc_as_of_date
- uuu_from_date
- uuu_issue_date
- uuu_last_update_date
- uuu_rfb_due_date
- uuu_to_date
- uuu_week_picker
- uuu_datasource
- uuu_depreciation_mtd
- uuu_line_item_status
- row_id
- uuu_bid_count
- uuu_bidders_count
- uuu_planning_item_picker
- uuu_proj_picker
- record_no
- uuu_resc_picker
- uuu_role_picker
- uuu_commit_short_desc
- end_date
- uuu_creation_date
- uuu_asset_name
- uuu_commit_breakdown
- uuu_asset_code
- uuu_asset_navigation_code
- uuu_timescale_units
- creator_id
- wpid
- uuu_cost_costattribute
- uuu_cost_external_refid
- uuu_cost_status
- uuu_cost_cost_type
- uuu_cost_description
- uuu_cost_item

- uuu_cost_owner
- uuu_cost_code
- uuu_dm_create_date
- uuu_file_create_date
- uuu_file_issue_date
- uuu_dm_percent_complete
- uuu_file_size
- uuu_file_version
- uuu_dm_description
- uuu_dm_node_path
- uuu_dm_node_name
- uuu_file_revision_no
- uuu_file_title
- uuu_dm_create_by
- uuu_file_create_by
- uuu_fund_fundcategory
- uuu_fund_long_desc
- uuu_fund_description
- uuu_fund_fundname
- uuu_fund_code
- uuu_description
- uuu_resc_nwd_type
- uuu_resc_interest
- uuu_resc_proficiency
- uuu_resc_skill
- uuu_role_status
- uuu_role_name
- uuu_resc_capacity
- uuu_user_address
- uuu_user_city
- uuu_user_country
- uuu_user_email
- uuu_user_fax
- uuu_user_firstname
- uuu_user_homephone
- uuu_user_lastname
- uuu_user_mobilephone
- uuu_user_pager
- uuu_user_state
- uuu_user_timezone
- uuu_user_title

- uuu_user_workphone
- uuu_user_zip
- uuu_resc_status
- uuu_resc_code
- uuu_resc_name
- uuu_early_finish
- uuu_early_start,uuu_finish
- uuu_late_finish
- uuu_late_start
- uuu_start
- uuu_act_pct_complete
- uuu_activity_work_hrs
- uuu_duration
- uuu_fixed_cost
- uuu_float
- uuu_labor_cost
- uuu_non_labor_cost
- uuu_total_cost
- uuu_activity_id
- uuu_flag_complete
- uuu_flag_milestone
- uuu_activity_resources
- uuu_dependency_type
- uuu_activity_name
- uuu_outline_code
- uuu_cost_li_type

Update BP Record with Attachment

The following applies to the **Update BP Record with Attachment** (REST API Details in Business Processes) Web Services V1:

PUT /ws/rest/service/v1/bp/record/file/{project_number}

Purpose

Update a record with attachment in a specific BP in a shell based on shell number or from Company level if the project, or shell number, is not provided.

The input JSON shall provide various options to be considered for fetching the data.

Input

All parameters must be URL encoded.

Path Parameter

project_number: Specify the Project number in which the records exists; if not provided, then records are considered to be from Company Level.

Both input & output in JSON format in the body.

Update BP Record with Attachment

```
{
   "options":{
      "bpname":"line6",
      "LineItemIdentifier":"upwoLISAS",
      "workflow_details":{
         "WFCurrentStepName":"Step 4",
         "WFActionName":"Line 3"
      }
   },
   "data":[
      {
         "ugenUserIDPK":null,
         "_bp_lineitems":[
            {
               "ugenShellPK":"/AP1",
               "uuu_tab_id":"Standard",
               "short_desc":"desc3_m11",
               "upwoLISAS":"0001",
               "uuu_line_item_status":"Active"
            }
         ],
         "record_no":"uxli6-0020",
         "title":"new title",
         "_attachment":[
            {
               "file_name":"file_1.txt",
               "title":"file_title1",
```

```
               "issue_date":"05/06/2018",
               "revision_no":"300"
            },
            {
               "file_name":"file_2.txt",
               "title":"file_title2",
               "issue_date":"05/06/2018",
               "revision_no":"200"
            }
         ]
      }
   ],
   "_attachment":
   {
        "zipped_file_name" : "zip_file_name.zip",
        "zipped_file_size": "746089",
        "zipped_file_content" :"<base64_encoded string of
zip_file_name.zip file>"
    }
}
```

Notes:

- If "adding attachment" is disabled in Upper form or Detail form, and user is trying to attach file to corresponding form. Updating record will fail.
- Only one record update with attachments is supported in this call. If the file exists in a record, then that file will be ignored and will not get revised .
- If integration form has "add attachment" disabled, then files will not get attached.
- If the "_attachment" (outside data list) for zip file is not provided, then the record will be updated without attachment.
- Auto-Creation setting is mandatory in Shell or Company BP Setup in the Admin mode.
- In input JSON options, the "project_number" specifies the shell in which the records exist, if the "project_number" is not provided, then the records are considered to be from Company Level.
- The "record_no" is mandatory and is a part of data.
- The "bpname" is mandatory and is a part of options form parameter.
- The WFCurrentStepName and WFActionName are part of the "workflow_details" and are for Workflow type BPs. If the values for WFCurrentStepName and WFActionName are provided, then the record will be updated and sent to next step of the workflow. If the values for WFCurrentStepName and WFActionName are not provided, then the record will be updated but it will remain on the same workflow step.
- The LineItemIdentifier is part of options form parameter. The LineItemIdentifier value will be DE name present in the lineItem. That DE should be present in "data" (input record JSON) with its value.
- The "Enable Step for Integration" option in the Workflow BP setup is not available for the REST integration.

Steps to add LineItemIdentifier in the BP design:

1. Create a custom DE with DD: Sys Auto Sequence.
2. Add this DE to the Detail Form of the BP with the line items that need to be updated.
3. Navigate to the Company Workspace > Admin mode > Business Processes and open the BP.
4. Click Open drop-down to open and select Data Elements to open the Data Elements Configuration window.
5. Click the Auto Sequence tab and click Add.
6. Select the data element added in the Detail Form and select the level as: Per Record.
7. Provide the start value and click Create.
8. Add the parameter "Sys Sequence counter" and click OK.
9. Add the DE to Integration > Detail.

10. Set the "Direction" to "Both" for that DE.
11. Complete and deploy the BP.
12. In the body of the request, add the DE name as Lineitem identifier and send the request.

Delete the Line-Item, using Update Request

To delete the line-Item using update request, the field "_delete_line_item" should be used (value of which will be comma separated values of LineItemIdentifier DE) as shown in the following example:

Sample: *Delete line-item input*

```
{
   "options":{
      "bpname":"line6",
      "LineItemIdentifier":"upwoLISAS"
   },
   "data":[
      {
         "ugenUserIDPK":null,
         "_delete_bp_lineitems":"0002,0001,0003",
         "record_no":"uxli6-0021",
         "title":"title_m112244"
      }
   ]
}
```

Output:

JSON object containing 'status', 'data', 'message'

A message will be present if status is not 200 .

Status codes are:

1>200 OK, if all creation succeeds.
2>3000, if any of records creation fails.

Sample: *Update record with attachment response*

```
{
   "data":[

   ],
   "message":[
```

```
      {
         "_record_status":"success",
         "record":{
            "ugenUserIDPK":null,
            "record_no":"uxli6-0021",
            "title":"title_m112244"
         }
      }
   ],
   "status":200
}
```

or if zip_file_size of uploaded zip file is not correct :

```
   {
       "data": [],
       "message": [
           "Uploaded Zip file is invalid"
       ],
       "status": 3003
   }
```

Data Elements in Line Items

If the following Data Elements are present in the Line Items, they will not be updated during UpdateBPRecord call.

- bitemid
- budgetid
- sovitemid
- uuu_cm0_picker
- xid
- ds_code
- fsm_lineitem_id
- asm_lineitem_id
- uuu_lat
- uuu_long
- uuu_company_account_name
- uuu_company_account_code
- uuu_company_acc_codepicker
- uuu_activity_picker
- uuu_asset_picker
- ref_bpo_lineitem

- ref_bpo
- ref_rfb
- refid
- uuu_sovlinum
- otherCompanyID
- uuu_costcode_picker
- scheduled_value
- uuu_asset_cum_depreciation
- uuu_asset_curr_period_dep
- uuu_asset_net_book_value
- uuu_unit_price
- currencyid
- due_date
- uuu_asset_calc_as_of_date
- uuu_from_date
- uuu_issue_date
- uuu_last_update_date
- uuu_rfb_due_date
- uuu_to_date
- uuu_week_picker
- uuu_datasource
- uuu_depreciation_mtd
- uuu_line_item_status
- row_id
- uuu_bid_count
- uuu_bidders_count
- uuu_planning_item_picker
- uuu_proj_picker
- record_no
- uuu_resc_picker
- uuu_role_picker
- uuu_commit_short_desc
- end_date
- uuu_creation_date
- uuu_asset_name
- uuu_commit_breakdown
- uuu_asset_code
- uuu_asset_navigation_code
- uuu_timescale_units
- creator_id
- wpid

- uuu_cost_costattribute
- uuu_cost_external_refid
- uuu_cost_status
- uuu_cost_cost_type
- uuu_cost_description
- uuu_cost_item
- uuu_cost_owner
- uuu_cost_code
- uuu_dm_create_date
- uuu_file_create_date
- uuu_file_issue_date
- uuu_dm_percent_complete
- uuu_file_size
- uuu_file_version
- uuu_dm_description
- uuu_dm_node_path
- uuu_dm_node_name
- uuu_file_revision_no
- uuu_file_title
- uuu_dm_create_by
- uuu_file_create_by
- uuu_fund_fundcategory
- uuu_fund_long_desc
- uuu_fund_description
- uuu_fund_fundname
- uuu_fund_code
- uuu_description
- uuu_resc_nwd_type
- uuu_resc_interest
- uuu_resc_proficiency
- uuu_resc_skill
- uuu_role_status
- uuu_role_name
- uuu_resc_capacity
- uuu_user_address
- uuu_user_city
- uuu_user_country
- uuu_user_email
- uuu_user_fax
- uuu_user_firstname
- uuu_user_homephone

- uuu_user_lastname
- uuu_user_mobilephone
- uuu_user_pager
- uuu_user_state
- uuu_user_timezone
- uuu_user_title
- uuu_user_workphone
- uuu_user_zip
- uuu_resc_status
- uuu_resc_code
- uuu_resc_name
- uuu_early_finish
- uuu_early_start,uuu_finish
- uuu_late_finish
- uuu_late_start
- uuu_start
- uuu_act_pct_complete
- uuu_activity_work_hrs
- uuu_duration
- uuu_fixed_cost
- uuu_float
- uuu_labor_cost
- uuu_non_labor_cost
- uuu_total_cost
- uuu_activity_id
- uuu_flag_complete
- uuu_flag_milestone
- uuu_activity_resources
- uuu_dependency_type
- uuu_activity_name
- uuu_outline_code
- uuu_cost_li_type

Create BP Record with Attachment

POST /ws/rest/service/v1/bp/record/file/{project_number}

Purpose

Create a record in a specific BP in a shell based on shell number or from Company level if project/shell number is not provided.

The input JSON shall provide various options to be considered for fetching the data

Input

All parameters should be URL encoded.

Path Parameter

project_number: Specify the Project number in which the records exists; if not provided, then records are considered to be from Company Level.

POST body is a JSON

> **Note**: POST call has input & output both as JSON in the body.

```
{
    "options": {
        "bpname": "Vendors",
        "workflow_details":
        {
            "workflow_name": "workflow_name",
            "user_name" : "first_name  last_name",
            "action_name" : "action_name"
        }
    },
    "data": [
            {
                "uuu_user_id": "a@abc.com",
                "uuu_record_last_update_date": "04-12-2018",
                "uveFaxTB16": null,
                "uveCertificateNoTB64": null,
                "uvePrimaryContactTB64": "a",
                "title": "v-00101",
                "uveLicenseNoTB16": null,
                "uuu_contact_company": "v-00101",
                "uveCOIAmoutCA": 0,
                "_bp_lineitems": [
                    {
                        "uirCntctFstNmTB": "a",
                        "uuu_user_workphone": null,
                        "uuu_tab_id": "List of Contacts",
```

```
            "title": "t",
            "ugenAddress1TXT120": null,
            "ugenAddress2TXT120": null,
            "ugenCountryPD": null,
            "ugenCityTXT50": null,
            "short_desc": "Vendor Contact",
            "uriCntctLstNmTB": "b",
            "ugenStatePD": null,
            "ugenZipCodeTXT16": null,
            "uveEmailTB120": "hello@abc.com",
            "ugenAddress3TXT120": null,
        "_attachment":[
            {
                "file_name":"new 1.txt",
                "title":"file_title",
                "issue_date":"05/06/2018",
                "revision_no":"100"
            }
            ]
            }
        ],
        "uvePolicyNoTB32": null,
        "uveVendorTypePD": "Architect",
        "ugenCityTXT50": null,
        "uveCoiExpDOP": null,
        "uuu_dm_publish_path": "v_path",
        "uuu_contact_last_name": "b",
        "ugenZipCodeTXT16": null,
        "uveEmailTB120": "a@abc.com",
        "ugenAddress3TXT120": null,
        "uveReferenceIdTB16": null,
        "uuu_creation_date": "04-12-2018",
        "ugenRemarksTB4000": null,
        "uvePhoneTB64": null,
        "uveTaxIDTB16": null,
        "uveMinorityBusCB": 0,
        "uveInsuranceCoTB32": null,
        "ugenExpirationDateDOP": null,
        "uveWomanOwnedCB": 0,
        "uveVendorNameTB50": "v-00101",
```

```
                "ugenAddress1TXT120": null,
                "uveDisadvantagedBusCB": 0,
                "ugenDiscipline": null,
                "creator_id": "Company Administrator",
                "ugenAddress2TXT120": null,
                "ugenCountryPD": null,
                "uveVendorIDTB16": "v-00101",
                "ugenStatePD": null,
                "uuu_contact_first_name": "a",
                "status": "Active",
                "_attachment":[
                    {
                        "file_name":"new 1.txt",
                        "title":"file_title1",
                        "issue_date":"05/06/2018",
                        "revision_no":"300"
                    },
                    {
                        "file_name":"exp1.txt",
                        "title":"file_title2",
                        "issue_date":"05/06/2018",
                        "revision_no":"200"
                    }
                    ]
            }
        ]
    ,
    "_attachment": {
            "zipped_file_name" : "create.zip",
            "zipped_file_size": "746089",
            "zipped_file_content" :"< base64_encoded string of
create.zip file>"
    }
}
```

If "adding attachment" is disabled in Upper form or Detail form, and user is trying to attach file to corresponding form. Creating record will fail.

If "record_no" is not provided, then the auto-generated record_no will be assigned to the record

If a unique "record_no" is provided, then the record will be created be given record_no.

- "bpname" is mandatory and is part of options form parameter.

- If "workflow_details" is not specified, then the fall back will be the auto-creation settings defined on the BP Setup.
- If specified, then all the three params - user_name, workflow_name and action_name are mandatory.
- Validations Performed:
  - If the user is a valid active user in the project.
  - Workflow name is valid and active.
  - User is an assignee (user/group) on the creation step of the workflow.
  - Action name is valid outgoing link from the creation step.
  - Error messages:
    - Enter a valid or an active user. (Missing key or invalid user name)
    - The workflow name is not valid. (Missing key or invalid/inactive workflow name)
    - The user does not have an active workflow template. (User is not an assignee on the creation step)
    - The workflow action name is not valid. (Missing key or invalid outgoing action name from creation step)
- If "_attachment" (outside data list) for zip file is not provided, then record will be created without attachment.

Output

JSON object containing 'status', 'data', 'message'

A message will be present if status is not 200.

Status codes are:

1> 200 OK, if all creation succeeds.

2> 3000, if any of records creation fail.

> **Note**: Only one record input should be provided in Create BP record with attachment.

Create BP Sample Response


```
{
    "data": [],
    "message": [
        {
            "uuu_user_id": "a@abc.com",
            "uuu_record_last_update_date": "04-12-2018",
            "uveFaxTB16": null,
            "uveCertificateNoTB64": null,
            "uvePrimaryContactTB64": "a",
            "title": "v-00101",
            "uveLicenseNoTB16": null,
```

```
"uuu_contact_company": "v-00101",
"_record_status": "success",
"uveCOIAmoutCA": 0,
"_bp_lineitems": [
    {
        "uirCntctFstNmTB": "a",
        "uuu_user_workphone": null,
        "uuu_tab_id": "List of Contacts",
        "title": "t",
        "ugenAddress1TXT120": null,
        "_attachment": [
            {
                "issue_date": "05/06/2018",
                "revision_no": "100",
                "file_name": "new 1.txt",
                "title": "file_title"
            }
        ],
        "ugenAddress2TXT120": null,
        "ugenCountryPD": null,
        "ugenCityTXT50": null,
        "short_desc": "Vendor Contact",
        "uriCntctLstNmTB": "b",
        "ugenStatePD": null,
        "ugenZipCodeTXT16": null,
        "uveEmailTB120": "hello@abc.com",
        "ugenAddress3TXT120": null
    }
],
"uvePolicyNoTB32": null,
"_attachment": [
    {
        "issue_date": "05/06/2018",
        "revision_no": "300",
        "file_name": "new 1.txt",
        "title": "file_title1"
    },
    {
        "issue_date": "05/06/2018",
        "revision_no": "200",
```

```
                    "file_name": "exp1.txt",
                    "title": "file_title2"
                }
            ],
            "record_no": "VEN-0086",
            "uveVendorTypePD": "Architect",
            "ugenCityTXT50": null,
            "uveCoiExpDOP": null,
            "uuu_dm_publish_path": "v_path",
            "uuu_contact_last_name": "b",
            "ugenZipCodeTXT16": null,
            "uveEmailTB120": "a@abc.com",
            "ugenAddress3TXT120": null,
            "uveReferenceIdTB16": null,
            "uuu_creation_date": "04-12-2018",
            "ugenRemarksTB4000": null,
            "uvePhoneTB64": null,
            "uveTaxIDTB16": null,
            "uveMinorityBusCB": 0,
            "uveInsuranceCoTB32": null,
            "ugenExpirationDateDOP": null,
            "uveWomanOwnedCB": 0,
            "uveVendorNameTB50": "v-00101",
            "ugenAddress1TXT120": null,
            "uveDisadvantagedBusCB": 0,
            "ugenDiscipline": null,
            "creator_id": "Company Administrator",
            "ugenAddress2TXT120": null,
            "ugenCountryPD": null,
            "uveVendorIDTB16": "v-00101",
            "ugenStatePD": null,
            "uuu_contact_first_name": "a",
            "status": "Active"
        }
    ],
    "status": 200
}

in case of any error :
{
```

```
    "data": [],
    "message": [
        {
            "_record_status": "Error Business Process record_no hello
already exists. ",
            "record": {
                "uuu_user_id": "a@abc.com",
                "uuu_record_last_update_date": "04-12-2018",
                "uveFaxTB16": null,
                "uveCertificateNoTB64": null,
                "uvePrimaryContactTB64": "a",
                "title": "v-00101",
                "uveLicenseNoTB16": null,
                "uuu_contact_company": "v-00101",
                "uveCOIAmoutCA": 0,"uveTaxIDTB16": null,
                "_bp_lineitems": [
                    {
                        "uirCntctFstNmTB": "a",
                        "uuu_user_workphone": null,
                        "uuu_tab_id": "List of Contacts",
                        "title": "t",
                        "ugenAddress1TXT120": null,
                        "ugenAddress2TXT120": null,
                        "ugenCountryPD": null,
                        "ugenCityTXT50": null,
                        "short_desc": "Vendor Contact",
                        "uriCntctLstNmTB": "b",
                        "ugenStatePD": null,
                        "ugenZipCodeTXT16": null,
                        "uveEmailTB120": "hello@abc.com",
                        "ugenAddress3TXT120": null
                    }
                ],
                "uvePolicyNoTB32": null,
                "record_no": "hello",
                "_attachment": [
                    {
                        "file_name": "new 1.txt"
                    }
                ],
```

```
                "uveVendorTypePD": "Architect",
                "ugenCityTXT50": null,
                "uveCoiExpDOP": null,
                "uuu_dm_publish_path": "v_path",
                "uuu_contact_last_name": "b",
                "ugenZipCodeTXT16": null,
                "uveEmailTB120": "a@abc.com",
                "ugenAddress3TXT120": null,
                "uveReferenceIdTB16": null,
                "uuu_creation_date": "04-12-2018",
                "ugenRemarksTB4000": null,
                "uvePhoneTB64": null,
                "uveTaxIDTB16": null,
                "uveMinorityBusCB": 0,
                "uveInsuranceCoTB32": null,
                "ugenExpirationDateDOP": null,
                "uveWomanOwnedCB": 0,
                "uveVendorNameTB50": "v-00101",
                "ugenAddress1TXT120": null,
                "uveDisadvantagedBusCB": 0,
                "ugenDiscipline": null,
                "creator_id": "Company Administrator",
                "ugenAddress2TXT120": null,
                "ugenCountryPD": null,
                "uveVendorIDTB16": "v-00101",
                "ugenStatePD": null,
                "uuu_contact_first_name": "a",
                "status": "Active"
            }
        }
    ],
    "status": 3000
}
or if zip_file_size of uploaded zip file is not correct :
{
    "data": [],
    "message": [
        "Uploaded Zip file is invalid"
    ],
    "status": 3003
```

```
}
```

Fetch BP Record List with filter_criteria

POST /ws/rest/service/v1/bp/records/{project_number}

Purpose

Earlier in REST V1 service, "POST /ws/rest/service/v1/bp/records/{projectnumber}" used "filter_condition" to filter the BP records. Only '=' (equal) condition was supported for Data Elements 'end_date','record_no' and 'status'"

filter_condition

```
{
    "bpname" : "Vendors",
    "lineitem" : "yes",
    "lineitem_fields" : " uuu_tab_id;title",
    "filter_condition" : "status=Active",
    "record_fields" : "uuu_user_id;uuu_record_last_update_date"
}
```

Enhancing BP Record list V1 REST API to support for filters like:

- Text, String = Pattern matching
- Number, Cost = Ranges and arithmetic / logical operators
- Date = Ranges

To support the new BP filters, new "**filter_criteria**" should be added in POST data.

filter_criteria

```
{
    "bpname" : "Vendors",
    "lineitem" : "yes",
    "lineitem_fields" : "uuu_tab_id;title",
    "record_fields" : "uuu_user_id;uuu_record_last_update_date",
    "filter_criteria":{
        "join":"OR",
        "filter":[
            {
                "field":"record_no",
                "value":"VEN",
                "condition_type":"like"
```

```
            },
            {
                "field":"uuu_file_title",
                "value":"first document title",
                "condition_type":"like"
            },
            {
                "field":"uuu_file_issue_date",
                "value":"12-07-2017 07:54:00",
                "value2":"20-07-2018",
                "condition_type":"range"
            }
        ]
    }
}
```

filter_criteria Key Definitions

1) The "join": (optional) Specify if the filter condition has to be combined using OR or AND operator. Default is AND.
2) The "filter": List of filter conditions. Each condition will have "field", "value" ("value2" if condition_type is range) and condition_type.
   - The "field": BP form DE name for which the filter condition has to be applied.
   - The "value": value for the DE to filter the data.
   - The "value2": second value for the range condition. Not required to be specified for other conditions.
   - The "condition_type": the filter condition that needs to be applied.

Possible Values For condition_type

condition_type	Notes	Supported Data Element Types
like	For string data types. The value can contain the SQL wildcard characters when like is specified.	Text (String)
eq	For string, numeric and date data type. Will perform the exact match.	Text (String), Number, Cost, Date

lt	For numeric values. Will perform less than value.	Number, Cost, Date
gt	For numeric values. Will perform greater than value.	Number, Cost, Date
lteq	For numeric values. Will perform less than or equal value.	Number, Cost, Date
gteq	For numeric values. Will perform greater than or equal value.	Number, Cost, Date
neq	For numeric values. Will perform not equal value.	Text (String), Number, Cost, Date
range	Numeric, Date values. Will perform range search between value (from) and value2 (to).	Number, Cost, Date

Notes:

- The **Input Date** fields should be provided in "MM-dd-yyyy HH:mm:ss" or ""MM-dd-yyyy" format in **filter_criteria**.
- All parameters should be URL encoded.
- POST body is a JSON, POST call has input and output both as JSON in the body, "bpname" is mandatory.
- The "record_fields" (optional) is list of fields. That is to state that the upper form DR names in the record upper form, only those fields (along with the "record_no) will be listed in the result.
- The "lineitem_fields" (optional) is a list of fields in the record lineitem form, and only those fields will be listed in the result.
- Earlier "filter_condition" is still supported, and it is the condition on the record level, the records which satisfy that criteria will be fetched. Only "=" (equal) condition is supported.

Output

JSON object containing 'status', 'data', 'message'

A message will be present if status is not 200; otherwise, it will be "success".

Sample Response of Get BP list after applying filter_criteria

```
{
  "data":
  [
    {
```

```
      "uuu_user_id":"a@abc.com",
      "uuu_record_last_update_date":"2018/04/23 11:06",
      "_bp_lineitems":
      [
        {
          "uuu_tab_id":"List of Contacts",
          "li_num":1,
          "title":"t"
        }
      ],
      "record_no":"VEN-0023"
    },
    {
      "uuu_user_id":"a@abc.com",
      "uuu_record_last_update_date":"2018/05/28 04:34",
      "_bp_lineitems":
      [
        {
          "uuu_tab_id":"List of Contacts",
          "li_num":1,
          "title":"t"
        },
        {
          "uuu_tab_id":"List of Contacts",
          "li_num":2,
          "title":"t"
        }
      ],
      "record_no":"VEN-0024"
    }
  ],
  "message":
  [ "success"
  ],
```

```
  "status":200
}
```

Payment Application with Auto-populate from SOV and Commits

Any auto-populate from SOV, Base Commit, or Change Commit will take precedent over the input provided in the JSON request file.

Bulk Create Records

POST /ws/rest/service/v2/bp/record/bulk

Purpose

To create bulk BP records of Simple and Line Item BP (non-workflow) type.

There are couple of optimizations done in this service with reference to existing v1/v2 BP Create services.

> **Note**: The RAP will not be triggered upon creation of the records. (since 19.12.13.1)

Input

Authentication

Integration user authorization token is required as part of Authorization header with necessary BP Create service permission for that integration user.

The integration user token can be generated by using the Unifier Admin UI or by using API (Refer REST Services V1).

Header Information

Authorization:Bearer eyJ0eXAiOiJEQiJ9.eyJ1c2VybmFtZSI6IiQkaW50ZWcxIn0=.43E4736D-37C2-60AF-E643-C6B648DE07DD26CDA133C93F3DF5B37D129FA40232F6

Content-Type:application/json

Both input & output in JSON format in the body.

> **Notes**:
>
> - The "async" param in the options JSON is optional and if true, processes the request asynchronously. A call back URL is obtained in response for the caller to ping back on the status of the request.
> - The record_no will be auto generated; even if it is specified, it will be

ignored.

- Logic for auto-population of values from Details form (sum of all lines) for the amount type fields was not included in bulk BP records creation code.
- Amount DE in upper form is rolled up from line items; it should not be a part of upper form data.

JSON Input for Bulk Create Records

```
{
   "options":{
     "project_number":"P-0001",
      "bpname":"Areas Bulk Create",
      "async": true
   },
    "data":[
     {"ugenProjectName": "P-002", "Quantity": 1.0, "uMatCost": 1.0,
"ugenVendorBP": "VEN-0001","title":
"AreasBulkCreate1","uem_rate": 1.0,"Assigned_To": "Company
Administrator","ugenProjectNumber": "P-0001", "uriEnvironImpactPD":
"Yes","CPLGrossAreaND": 0.0,"creator_id": "Company
Administrator","uPracqSiteVisDateDOP": "06-05-2020
00:00:00","WaterMeterBPDP": "uwm-0000","status": "Active"},
     {"ugenProjectName": "P-002", "Quantity": 2.0, "uMatCost": 1.0,
"ugenVendorBP": "VEN-0001","title":
"AreasBulkCreate2","uem_rate": 1.0,"Assigned_To": "Company
Administrator","ugenProjectNumber": "P-0001", "uriEnvironImpactPD":
"Yes","CPLGrossAreaND": 0.0,"creator_id": "Company
Administrator","uPracqSiteVisDateDOP": "06-05-2020
00:00:00","WaterMeterBPDP": "uwm-0001","status": "Active"},
     {"ugenProjectName": "P-002",  "Quantity": 3.0, "uMatCost": 1.0,
"ugenVendorBP": "VEN-0001","title":
"AreasBulkCreate3","uem_rate": 1.0,"Assigned_To": "Company
Administrator","ugenProjectNumber": "P-0001", "uriEnvironImpactPD":
"Yes","CPLGrossAreaND": 0.0,"creator_id": "Company
Administrator","uPracqSiteVisDateDOP": "06-05-2020
00:00:00","WaterMeterBPDP": "uwm-0000","status": "Active"}
  ]
}
```

Output

JSON output for Bulk Create Records

```
{
```

```
  "message": {
    "@uri": "/ws/rest/service/status/job/115",
    "job_id": "115"
  },
  "status": "202"
}
```

Response

For when async parameter is false or not available in options.

JSON output for Bulk Create Records

```
{
  "data":
  [
  ],
  "message":
  [ "success"
  ],
  "status":200
}
```

Bulk Update Records

PUT /ws/rest/service/v2/bp/record/bulk

Purpose

To update BP records upper form details.

> **Note**: Only the Simple type and the Line Item type BPs are supported.

Input

Both input & output in JSON format in the body.

JSON input for Bulk Update Records

```
{
  "options":{
     "bpname" : "Simple_bp",
```

```
    "project_number" :"P-0002"
  },
  "data": [
   { "ugenAmountCA":600.0, "unameofAgentDPK": "vendor_002",
"record_no":"uxsim02-0000" },
   { "ugenAmountCA":600.0, "unameofAgentDPK": "vendor_002",
"record_no":"uxsim02-0001" },
   { "ugenAmountCA":600.0, "unameofAgentDPK": "vendor_002",
"record_no":"uxsim02-0002" }
  ]
}
```

Output

JSON output for Bulk Update Records

```
{
  "data":
  [
  ],
  "message":
  [ "success"
  ],
  "status":200
}
```

Bulk Reverse Auto-populate Records

PUT /ws/rest/service/v2/bp/record/bulk

Purpose

To update Destination BP records upper form details from Source BP record Line items.

> **Note**: The destination BP must be of Simple type BP or Line Item type BP.

Input

Both input & output in JSON format in the body.

JSON Input for Bulk Reverse Auto-Populate (RAP) Records

```
{
    "options":
    {
            "bpname" : "Source BP name",
            "project_number" :"P-0001",
            "record_no":"record number in Source BP",
            "bulk_type":"lineitem_to_upperform",
            "li_picker_field":"Picker Data Element name",
            "destination":{
                "bpname" : "Destination BP name",
                "field_mapping":{
                    "li_field0 (Data Element) in source BP":"upper_field0
(Data Element) in destination BP",
                    "li_field1":"upper_field1",
                    "li_field2":"upper_field2",
                    "li_field3":"upper_field3"
                },
                "filter" :[
                    {
                     "field_name":"Source BP Line item Data Element name",
                     "operator" :"eq",
                     "value":"Data Element Value"
                    },
                    {
                     "field_name":"ugenAmountCA",
                     "operator" :"eq",
                     "value":"100"
                    }
                ]
            }
    }
}
```

Notes:

- The "filter" in input JSON is optional. Only the records that match with

the filter criteria will be Reverse Auto-populated.

- The li_picker_field: BP Picker in the destination BP.
- The bulk_type: Only the line item of the Upper form is supported.
- The bpname: Is the source BP Name.

Supported Filter Operators

Operators	Interpretation
eq	+
Lt	<
Lteq	<=
gt	>
gteq	>=

Note: The Filter field value must be placed inside double quotation marks (String).

Output

JSON Output for Bulk Reverse Auto Populate Records

```
{
  "data":
  [
  ],
  "message":
  [ "success"
  ],
  "status":200
}
```

Asynchronous Bulk BP Operations

Purpose

To make these operations Asynchronous:

- BulkCreateRecords (***Bulk Create Records*** (on page 275))
- BulkUpdateRecords (***Bulk Update Records*** (on page 277))
- BulkReverseAutoPopulateRecords (***Bulk Reverse Auto Populate Records*** (on page 278))

See the pertinent topics for details.

> **Note**: The destination BP must be of Simple type BP or Line Item type BP.

Input

Both input & output in JSON format in the body.

When input JSON contains "async" : "true" inside "options", the REST call will become asynchronous. The REST call will return URL to check status of BP operation.

JSON input for Asynchronous Bulk BP Operations

```
{
    "options":
    {
        "async" : "true",

        "bpname" : "Source BP name",
        "project_number" :"P-0001",
            .....
            .....
            .....

    }
}
```

Output

JSON Output for Asynchronous Bulk BP Operations

```
{
  "message": {
    "@uri": "/ws/rest/service/status/job/110",
    "job_id": "110"
  },
  "status": "202"
}
```

Asynchronous REST Call Status

Bulk Reverse Auto Populate Records

GET /ws/rest/service/status/job/{job_id}

Purpose

To check the status (success/pending/failed) of Asynchronous BP REST call.

Output

JSON Output for Asynchronous REST call status

```
{
  "message": {
    "job-message": "success",
    "job-status": "200"
  },
  "status": 200
}
```

Fetch List of Attached Files in a BP

GET /ws/rest/service/v1/bp/record/file/list/P-0001?input={"bpname" : "Purchase Orders","record_no" : "PO-0104"}

Where "P-0104" is the project number. If the project number is specified, then the record will be fetched from that project, if the project number is not specified then the record will be fetched from company-level BP.

Purpose

This web service enables the external application to fetch a list of attachments in a specific BP record in a:

- Shell or project, based on the shell or project number.
- Company, if the shell or project number is not available or has not been provided.

If there is a revision performed on any attached files, the list API returns the latest revised file details.

If any of the attached files are revised (at the record level, or at the line item level), the API list will contain all those revised files.

> **Note**: By design, there are no web services available for the Request for Bid (RFB) business process.

JSON input provides many options for fetching the data.

Input

All parameters should be URL encoded.

Path Parameter

project_number

Specify the project number for the project that contains the BP records. If you do not specify the project number, then the system will fetch the BP records at company level.

```
filter_condition
input= {
    "bpname" : "Purchase Orders",
    "record_no" : "PO-0104"
}
```

Request parameters have to be added with the above parameters.

You must add the request parameters to the parameters listed above.

The "bpname" and "record_no" are mandatory.

Output

JSON object containing 'status', 'data', 'message'

The system will display a message if the status is not 200; otherwise, the operation is "success".

Get BP Record Attachment list Sample Response


```
{
    "data": [
        {
            "bpname": "Purchase Orders",
            "attachments": [
                {
                    "issue_date": null,
                    "revision_no": null,
                    "file_name": "abc - Copy (3).txt",
                    "file_id": 13392,
                    "tab_name": "",
                    "publication_no": 8,
                    "title": null,
                    "file_size": 5
                },
                {
```

```
            "issue_date": null,
            "revision_no": null,
            "file_name": "abc - Copy (4).txt",
            "file_id": 13393,
            "tab_name": "",
            "publication_no": 12,
            "title": null,
            "file_size": 5
        }
    ],
    "detailTabs": [
        {
            "attachments": [
                {
                    "issue_date": null,
                    "revision_no": null,
                    "file_name": "abc - Copy (5).txt",
                    "file_id": 13394,
                    "tab_name": "Line Items",
                    "publication_no": 11,
                    "title": null,
                    "file_size": 5
                },
                {
                    "issue_date": null,
                    "revision_no": null,
                    "file_name": "abc - Copy (6).txt",
                    "file_id": 13395,
                    "tab_name": "Line Items",
                    "publication_no": 11,
                    "title": null,
                    "file_size": 5
                },
                {
```

```
                            "issue_date": null,
                            "revision_no": null,
                            "file_name": "abc - Copy (7).txt",
                            "file_id": 13396,
                            "tab_name": "Line Items",
                            "publication_no": 11,
                            "title": null,
                            "file_size": 5
                        },
                        {
                            "issue_date": null,
                            "revision_no": null,
                            "file_name": "abc - Copy (8).txt",
                            "file_id": 13397,
                            "tab_name": "Line Items",
                            "publication_no": 8,
                            "title": null,
                            "file_size": 5
                        }
                    ],
                    "tab_name": "Line Items"
                }
            ],
            "record_no": "PO-0104"
        }
    ],
    "message": [
        "success"
    ],
    "status": 200
}
```

Download a Single Attached File in a BP

GET ws/rest/service/v1/bp/record/download/file/{file_id}

where the file_id is the file that you want to download.

Purpose

This web service enables the external application to download a specific attachment in a specific BP record, using the file id, in a:

- Shell or project, based on the shell or project number.
- Company, if the shell or project number is not available or has not been provided.

If there is a revision performed on any attached files, the list API returns the latest revised file details.

If any of the attached files are revised (at the record level, or at the line item level), the API list will contain all those revised files.

Notes:

- Reference files are not downloaded, only the base file is downloaded when using this REST API.
- By design, there are no web services available for the Request for Bid (RFB) business process.

Input

All parameters should be URL encoded.

Path Parameter

file_id

Specify the file id.

Output

Octet-stream of the file along with JSON object containing 'status', 'data', 'message'

If the file id is valid, then the file content will come as a zip file, as a part of the response. To get the file, you must save the response.

Note: The output is in octet-stream format, which only has arbitrary binary data.

Download Multipart or Large Files

If the BP has large drawing and 3d Model files as attachments and downloading all the attachments in the BP is not possible, you can "Fetch" a list of attachments (in the BP) first, determine which files you need, and proceed to download those needed attachments.

This service will enable third-party applications to fetch just a list of the BP attachments (and any updates because of subsequent changes to the list) in order to determine which attachments to download.

Fetch all Attachments in a Record as Multipart

GET /ws/rest/service/v1/bp/record/multipart/file

Purpose

To provide the attachments as a multipart file in the response along with the BP details and get all the attachments in a record as a zip file as a multipart octet-stream response.

After you save the response, it will be saved as a zip file with name as `<<model name>>_<<record number>>_<<random number>>_attachments.zip`, for example: `Purchase Orders_PO-0115_0_attachments.zip`.

The zip file maintains folder structure inside as "Attachments" folder for the upper form level attachments. Inside the folder the "`lineitems_0_1`" folder for the line items level attachments.

A folder will be created for the comment level attachments under the zip file: "`gc_attachments`."

The response content type will be application/octet-stream (sent with the header file), and the response cannot be parsed as JSON data (the response will not contain the record information).

The new multipart endpoint is implemented to handle large file download, similar to the downloading of large files in Document Manager.

Input

All parameters should be URL encoded.

filter_condition

```
input= {
    "projectNumber":"P-0001",
    "bpname":"Action Items",
    "record_no":"AI-000017",
    "lineitem":"yes"
}
```

Request parameters have to be added with the above parameters.

Payload Details

Mandatory

- "projectNumber"
- "bpname"
- "record_no"

Optional

"lineitem"

If the "lineitem" is set as "no", then the lineitem-related attachments will not be pulled.

Output

Octet-stream of the attachments zip along with JSON object containing 'status', 'data', 'message'

The system will display a message if the status is not 200; otherwise, the operation is "success".

> **Note:** The output is in octet-stream format, which only has arbitrary binary data.

Response Header

The following table contains the response header details.

Header (5)

Status Code: 200 OK

Key	Value
Connection	close
Date	Wed, 12 Oct 2022 06:12:27 GMT
Transfer-Encoding	chunked
Content-Type	The “Content-Type” header parameter would be the application/Octet-stream.
Content-Disposition	The “Content-Disposition” header parameter would be the attachment details, such as the file name, in standard and UTF8 formats. For example: attachment; filename="Action Items_AI-000017_0_attachments.zip";filename*=utf-8''Action%20Items_AI-000017_0_attachments.zip

Shell Manager

- Create Shell
- Update Shell
- Get Shell
- Get BPs in Shell or Company
- Get Project Shell List

Create Shell

POST /ws/rest/service/v1/admin/shell

Input JSON


```
   {
   "options" : {
   "copy_from_shell_template" : "OFF-00",
   "copy_modules" : "",
   "default_currency" : ""
   },
   "data" :
   [
   {
   "uBuildingNumber" : "BLD - 31",
   "uBuildingName" : "BUILDING 31",
   "uuu_location" : "/All Properties",
   "uuu_administrator" : "Company Administrator"
   },
   {
   "uBuildingNumber" : "BLD - 32",
   "uBuildingName" : "BUILDING 32",
   "uuu_location" : "/All Properties",
   "uuu_administrator" : "Company Administrator"
   }
   ]
}
```


Output JSON


```
   {
   "data":
   [
   ],
   "message":
   [
   {
   "uBuildingNumber":"BLD - 31",
   "uuu_administrator":"Eadlin Jay",
   "_record_status":"uBuildingName BUILDING 31 already exists under /All
   Properties. ",
   "uuu_location":"/All Properties",
   "uBuildingName":"BUILDING 31"
   },
   {
```

```
"uBuildingNumber":"BLD0032",
"uuu_administrator":"Eadlin Jay",
"_record_status":"SUCCESS",
"uuu_location":"/All Properties",
"uBuildingName":"BUILDING 32"
}
],
"status":3000
}
```


- If all the shells are created successfully, then the response status code will be 200.
- The copy_modules and default_currency are optional.
- The response will have the input data sent in plus the _record_status.
- The _record_status will indicate if the shell creation is a success or the respective error message.

> **Note**: The shell number in the response might not be the same as the input if auto-numbering is set.

Update Shell

PUT /ws/rest/service/v1/admin/shell

Input JSON

```
{
"options" : {
"shelltype" : "All Properties"
},
"data" :
[
{
"uPropertyNumber" : "RE00000",
"description" : "TEST35"
} ,
{
"uPropertyNumber" : "BLD0005",
"description" : "TEST35"
}
]
}
```

Output JSON

```
{
"data":
[
],
"message":
[
{
"_record_status":"SUCCESS",
"description":"TEST35",
"uPropertyNumber":"RE00000"
},
{
"_record_status":"Shell Number is not correct. ",
"description":"TEST35",
"uPropertyNumber":"BLD0005"
}
],
"status":3000
}
```

If all the shells are updated successfully, then the response status code will be 200.

The Response will have the input data sent in plus the _record_status.

The _record_status will indicate if the shell update is a success or the respective error message.

Get Shell

GET /ws/rest/service/v1/admin/shell

Input JSON

Optional filter condition can be provided as parameter to the GET request .

Name of key is options and value is in JSON format as below:

```
{
  "filter": {
                  "shell_type" : "Buildings"
              }
 }
```

The only applicable filter condition is the `"shell_type".`

Only one value for shell_type is supported.

Output JSON

1) When filter condition is not provided, Response will contain all the shells (not template) that are in "Active" status.


```
{
    "data":
    [
        {
            "shell_model_name":"us_apr",
            "shell_number":"RE00000",
            "shell_name":"All Properties",
            "shell_phase":null,
            "latitude":null,
            "longitude":null,
            "shell_location":null
        },
        {
            "shell_model_name":"us_st",
            "shell_number":"site-001",
            "shell_name":"Site_1",
            "shell_phase":null,
            "latitude":null,
            "longitude":null,
            "shell_location":"/All Properties"
        },
        {
            "shell_model_name":"us_bld",
            "shell_number":"B-0001",
            "shell_name":"Building_1",
            "shell_phase":null,
            "latitude":null,
            "longitude":null,
            "shell_location":"/All Properties/Site_1"
        }
    ],
    "message":
    [ ""
    ],
    "status":200
}
```

2) When filter condition is provided (shell type "Buildings"), then Response will contain shells only of type "Buildings".


```
{
    "data":
    [
        {
            "shell_model_name":"us_bld",
            "shell_number":"B-0001",
            "shell_name":"Building_1",
            "shell_phase":null,
            "latitude":null,
            "longitude":null,
            "shell_location":"/All Properties/Site_1"
        }
    ],
    "message":
    [ ""
    ],
    "status":200
}
```


3) If incorrect shell_type is provided in filter condition, then Error with status 2051 and message "Invalid Shell Type : input shell type " would be the Response.


```
{
    "data":
    [
    ],
    "message":
    [ "Invalid Shell Type : Buildings_1"
    ],
    "status":2051
}
```


Get BPs in Shell or Company

GET /ws/rest/service/v1/admin/bps/project_number

This GET service results all the Business Processes available (BP set ups) in shell:

- If project_number in URL is provided, or
- The company Level, if project_number is left empty.

Output JSON

1) When project number is provided, for example: /ws/rest/service/v1/admin/bps/B-0001, the Response will contain all the shell level Business Processes available to be used by users in that project/shell. When project number is not provided, for example: /ws/rest/service/v1/admin/bps, the Response will contain all the company level Business Processes available to be used by users in the Company Level.


```
{
 "data":
    [
        {
            "bp_model_name":"uab",
            "bp_name":"Annual Budget",
            "studio_source":"cost",
            "studio_type":"other",
            "no_workflow":false
        },
        {
            "bp_model_name":"uatc",
            "bp_name":"Assets Creator",
            "studio_source":"simple",
            "studio_type":null,
            "no_workflow":false
        },
        {
            "bp_model_name":"ubcfm",
            "bp_name":"Budget Changes-FM",
            "studio_source":"cost",
            "studio_type":"other",
            "no_workflow":false
        }
    ],
    "message":
    [ ""
    ],
    "status":200
}
```


2) When incorrect shell number is provided, the Result would be error response with status 602 and message: "Project/Shell Number is not correct.," as shown below.


```
{
     "data":
```

```
        [
        ],
        "message":
        [ "Project/Shell Number is not correct."
        ],
        "status":602
    }
```

Get Project Shell List

GetProjectShellList

GET /ws/rest/service/v1/admin/projectshell

Purpose

Get Project and Shells

Input

All parameters should be URL encoded.

URL example:

ws/rest/service/v1/admin/projectshell?options={"filter_condition": "projectname=project001", "status": "Active", "type" : "wbs_shell"}

Both input & output in JSON format in the body

Url Parameter

"options" (Optional): options attribute can be used to filter the list with the possible attributes.

"status"(Optional): "Active, Inactive, On-Hold, View-Only" are possible values.

"type"(Optional):"wbs_shell,generic_shell" are possible types.

"filter_condition"(Optional): projectname or projectnumber.

Output

JSON object containing 'status', 'data', 'message'

Status codes are:

1> 200 OK if success

For error scenarios, the relevant message will be displayed.

GetProjectShellList

```
{
  "data":
  [
    {
```

```
      "projectname":"All Projects",
      "projectnumber":"AP",
      "status":"Active",
      "type":"wbs_shell"
    },
    {
      "projectname":"Fred's Test Project 1",
      "projectnumber":"P-0001",
      "status":"Active",
      "type":"wbs_shell"
    },
    {
      "projectname":"Ray's Test Project 1",
      "projectnumber":"P-0002",
      "status":"Active",
      "type":"wbs_shell"
    }
],
  "message":
  [ "Success"
  ],
  "status":200
}
```


Level

- Authorization
- Response Error Codes
- Get Level List
- Create Level
- Update Level

Authorization

For more information, see the **Authentication** section in ***REST Services V1***.

Response Error Codes

Code	Message	Details
200	success	If the request is successful
500	Server Error, contact the system administrator.	If there is any exception when running this service
602	Project/Shell Number is not correct	Project number is incorrect or does not exists
603	Invalid 'space_type' provided in filter	
603	invalid 'space_type' provided in options	
618	Shell Number is not correct.	If incorrect project_number is provided or project_number is not provided in input
695	Project Number cannot be blank	
811	Invalid Filter Condition.	
855	Space Type is inactive at company level	
855	Level is inactive at company level	
1101	Empty or Invalid JSON data	If required input JSON is empty
3000	Partial failure.	Partial failure of REST service
3002	Invalid input	If input JSON did not contain the "data"/required parameter

Get Level List

GET /ws/rest/service/v1/level

Purpose

Get list of level record from Unifier. This works only at project or shell level.

Input

All parameters should be URL encoded.

URL query parameter -

- project_number(Required): specify the project/shell number to get project/shell level list.
- filter_condition

filter_condition

```
"filter_condition" : {
    "record_fields" : "uuu_floor_id, uuu_floor_name",
    "filter_criteria":{
        "join":"OR",
        "filter":[
            {
                "field":"status",
                "value":"Vacant",
                "condition_type":"like"
            },
            {
                "field":"App_date",
                "value":"10-09-2019 07:54:00",
                "value2":"10-17-2019",
                "condition_type":"range"
            }
        ]
    }
}
```

filter_condition key definition

- "record_fields" (optional) is list of fields, that is, DE names in Level; only those fields will be listed out in result.

filter_criteria key Definitions

1. "join": (optional)Specify if the filter condition has to be combined using OR or AND operator. Default is AND.
2. "filter": List of filter conditions. Each condition will have "field", "value" ("value2" if condition_type is range) and condition_type.
    - "field": BP form DE name for which the filter condition has to be applied.
    - "value": value for the DE to filter the data.

- "value2": second value for the range condition. Not required to be specified for other conditions.

Possible Values For condition_type

condition_type	Notes	Supported Data Element Types
like	For string data types. The value can contain the SQL wildcard characters when like is specified	Text (String)
eq	For string, numeric and date data type. Will perform the exact match.	Text (String), Number, Cost, Date
lt	For numeric values. Will perform less than value.	Number, Cost, Date
gt	For numeric values. Will perform greater than value.	Number, Cost, Date
lteq	For numeric values. Will perform less than or equal value.	Number, Cost, Date
gteq	For numeric values. Will perform greater than or equal value.	Number, Cost, Date
neq	For numeric values. Will perform not equal value.	Text (String), Number, Cost, Date
range	Numeric, Date values. Will perform range search between value and value2	Number, Cost, Date

Note: Input Date fields should be provided in "MM-dd-yyyy HH:mm:ss" or ""MM-dd-yyyy" format in filter_criteria.

Output

JSON object containing '**status**', '**data**', '**message**'

Get Level List output JSON


```
{
  "data": [
    {
      "App_date": "10/Oct/2019 10:00 AM",
      "uuu_sp_level_name": "F-1008"
    },
    {
      "App_date": "10/Oct/2019 12:00 AM",
```

```
      "uuu_sp_level_name": "F-1009"
    },
    {
      "App_date": "10/Oct/2019 12:00 AM",
      "uuu_sp_level_name": "F-1010"
    },
    {
      "App_date": "10/Oct/2019 12:00 AM",
      "uuu_sp_level_name": "F-1011"
    }
  ],
  "message": [],
  "status": 200
}
```


Status codes are:

1> 200 , for success

Create Level

POST /ws/rest/service/v1/level

Purpose

To create level record. This works only at project or shell level.

Input

All parameters should be URL encoded.

Both input & output in JSON format in the body

Create Level input JSON


```
{
 "options" :
  {
      "project_number":"Shell/Project number"
  },
  "data": [
    {
      "uuu_sp_level_name": "F-0001",
      "status": "Occupied",
```

```
      "App_date": "25/Dec/2019 7:00 PM",
      "ulevStorAreaND": "0.00000000",
      "ulevGrossBuildAreaNLD": "0.00000000",
      "uuu_sp_uom": "Sq Ft",
      "ulevStorAreaBasNLD": "0.00000000",
      "ulvlCode": "1.00000000",
      "ulevStackOrdDA": "123.00000000",
      "NumericPullDown": "One",
      "multiselect": "One",
      "CPLGrossAreaND": 2345.0
    }
  ]
}
```


Input JSON Field Description

- uuu_sp_level_name(Required): specify the floor name
- project_number(Required): specify the project/shell number to create level in that project

> **Note:** Input Date fields should be provided in Integration user preference format in input JSON.

Output

JSON object containing '**status**', '**data**', '**message**'

Create Level output JSON


```
{
  "data": [
    {
      "uuu_sp_level_name": "F-0001",
      "status": "Occupied",
      "App_date": "25/Dec/2019 7:00 PM",
      "ulevStorAreaND": "0.00000000",
      "ulevGrossBuildAreaNLD": "0.00000000",
      "uuu_sp_uom": "Sq Ft",
      "ulevStorAreaBasNLD": "0.00000000",
      "ulvlCode": "1.00000000",
      "ulevStackOrdDA": "123.00000000",
```

```
      "NumericPullDown": "One",
      "multiselect": "One",
      "CPLGrossAreaND": 2345.0
      "ulevMajorVertPenND": 0.0,
      "uuu_sp_level_drawing": null,
      "ulevBuildRatioNLD": 0.0
    }
  ],
  "message": [
    {
      "uuu_sp_level_name": "F-0001",
      "message": "success"
    }
  ],
  "status": 200
}
```


Status codes are:

- 200 for success
- 3000 for partial create

Update Level

PUT /ws/rest/service/v1/level

Purpose

To update level record. This works only at project or shell level.

Input

All parameters should be URL encoded.

Both input & output in JSON format in the body

Update Level input JSON


```
{
  "options" :
  {
      "project_number":"Shell/Project number"
  },
```

```
  "data": [
    {
      "uuu_sp_level_name": "F-0001",
      "status": "Occupied",
      "App_date": "26/Dec/2019 1:00 PM",
      "NumericPullDown": "One, Two"
      }
   ]
}
```

Input JSON field description:

- project_number (Required): specify the project/shell number to update level.
- uuu_sp_level_name(Required): specify the floor name to update level

> **Note:** Input Date fields should be provided in Integration user preference format in input JSON.

Output

JSON object containing '**status**', '**data**', '**message**'

Update Level output JSON

```
{
  "data": [
    {
      "uuu_sp_level_name": "F-0001",
      "status": "Occupied",
      "App_date": "26/Dec/2019 07:00 PM",
      "ulevStorAreaND": "0.00000000",
      "ulevGrossBuildAreaNLD": "0.00000000",
      "uuu_sp_uom": "Sq Ft",
      "ulevStorAreaBasNLD": "0.00000000",
      "ulvlCode": "1.00000000",
      "ulevStackOrdDA": "123.00000000",
      "NumericPullDown": "One",
      "multiselect": "One, Two",
      "CPLGrossAreaND": 2345.0
      "uuu_sp_level_drawing": null,
```

```
      "ulevBuildRatioNLD": 0.0
    }
  ],
  "message": [
    {
      "uuu_sp_level_name": "F-0001",
      "message": "success"
    }
  ],
  "status": 200
}
```


Status codes are:

1> 200 , for success

2> 3000, for partial update.

Space

- Authorization
- Response Error Codes
- Get Space List
- Create Space
- Update Space

Authorization

For more information, see the **Authentication** section in ***REST Services V1***.

Response Error Codes

Code	Message	Details
200	success	If the request is successful
500	Server Error, contact the system administrator.	If there is any exception when running this service
602	Project/Shell Number is not correct	Project number is incorrect or does not exists
603	Invalid 'space_type' provided in filter	

603	invalid 'space_type' provided in options	
618	Shell Number is not correct.	If incorrect project_number is provided or project_number is not provided in input
695	Project Number cannot be blank	
811	Invalid Filter Condition.	
855	Space Type is inactive at company level	
855	Level is inactive at company level	
1101	Empty or Invalid JSON data	If required input JSON is empty
3000	Partial failure.	Partial failure of REST service
3002	Invalid input	If input JSON did not contain the "data"/required parameter

Get Space List

GET /ws/rest/service/v1/space

Purpose

Get list of Space records from Unifier. This works only at project or shell level.

Input

All parameters should be URL encoded.

URL query parameter -

- project_number(Required): specify the project/shell number to get project/shell Space record list.
- filter_condition : Required parameter, as "space_type" (Space bp name) is always required.

URL query parameters

```
project_number = Building_shell_number
filter_condition = {
    "space_type" : "space_bp_name",
```

```
    "record_fields":"space_sp_space_name; uuu_rsv_overbook;
uuu_sp_level_picker; uSiteName; uBuildingName",
    "filter_criteria":{
        "join":"AND",
        "filter":[
           {
              "field":"space_sp_space_name",
              "value":"Space_00%",
              "condition_type":"like"
           },
           {
              "field":"uuu_rsv_overbook",
              "value":"No overbooking",
              "condition_type":"eq"
           }
        ]
    }
}
```

filter_condition key definition

- "space_type" is mandatory .
- "record_fields" (optional) is list of fields, that is, DE names in Space; only those fields (along with space_sp_space_name & uuu_sp_level_picker) will be listed out in result.

filter_criteria key Definitions:

1. "join": (optional) Specify if the filter condition has to be combined using OR or AND operator. Default is AND.
2. "filter": List of filter conditions. Each condition will have "field", "value" ("value2" if condition_type is range) and condition_type.
    - "field": BP form DE name for which the filter condition has to be applied.
    - "value": value for the DE to filter the data.
    - "value2": second value for the range condition. Not required to be specified for other conditions.

Possible Values For condition_type

condition_type	notes	Supported Data Element Types
like	For string data types. The value can contain the SQL wildcard characters when like is specified	Text (String)
eq	For string, numeric and date data type. Will perform the exact match.	Text (String), Number, Cost, Date
lt	For numeric values. Will perform less than value.	Number, Cost, Date
gt	For numeric values. Will perform greater than value.	Number, Cost, Date
lteq	For numeric values. Will perform less than or equal value.	Number, Cost, Date
gteq	For numeric values. Will perform greater than or equal value.	Number, Cost, Date
neq	For numeric values. Will perform not equal value.	Text (String), Number, Cost, Date
range	Numeric, Date values. Will perform range search between value and value2	Number, Cost, Date

Note: Input Date fields should be provided in "MM-dd-yyyy HH:mm:ss" or ""MM-dd-yyyy" format in filter_criteria.

Output

JSON object containing '**status**', '**data**', '**message**'

Get Space List output JSON

```
{
  "data":
  [
    {
```

```
      "uuu_rsv_overbook":"No overbooking",
      "uBuildingName":"Building_01",
      "space_sp_space_name":"Space_001",
      "uSiteName":"Site_01",
      "uuu_sp_level_picker":"floor_01",
      "uplRoomTB250":"sp_901",
      "uuu_rsv_reservable":"Yes",
    },
    {
      "uuu_rsv_overbook":"No overbooking",
      "uBuildingName":"Building_01",
      "space_sp_space_name":"Space_002",
      "uSiteName":"Site_01",
      "uuu_sp_level_picker":"floor_01",
      "uplRoomTB250":"sp_901",
      "uuu_rsv_reservable":"Yes",
    }
  ],
  "message":
  [ "success"
  ],
  "status":200
}
```


Status codes are:

1> 200 , for success

Create Space

POST /ws/rest/service/v1/space

Purpose

To create Space record. This works only at project or shell .

Input

All parameters should be URL encoded.

Both input & output in JSON format in the body

Create Space Record input JSON

```
{
  "options" :
  {
      "project_number":"Shell/Project number",
      "space_type" : "Space BP name"
  },
  "data": [
    {
      "uuu_rsv_overbook":"No overbooking",
      "uBuildingName":"Building_01",
      "space_sp_space_name":"Space_003",
      "uSiteName":"Site_01",
      "uuu_sp_level_picker":"floor_01",
      "uplRoomTB250":"sp_901",
      "uuu_rsv_reservable":"Yes"
    },
    {
      "uuu_rsv_overbook":"No overbooking",
      "uBuildingName":"Building_01",
      "space_sp_space_name":"Space_004",
      "uSiteName":"Site_01",
      "uuu_sp_level_picker":"floor_01",
      "uplRoomTB250":"sp_901",
      "uuu_rsv_reservable":"Yes"
    }
  ]
}
```

Input JSON field description:

- project_number (Required): specify the project/shell number to create space record.
- space_type (Required): specify the Space BP name, for which record will be created.
- space_sp_space_name (Required) : Unique "**space_sp_space_name**" must be provided in "data" for each space record.

Output

JSON object containing '**status**', '**data**', '**message**'

Create Space Record output JSON


```
{
  "data": [
    {
      "uuu_rsv_overbook":"No overbooking",
      "uBuildingName":"Building_01",
      "space_sp_space_name":"Space_003",
      "uSiteName":"Site_01",
      "uuu_sp_level_picker":"floor_01",
      "uplRoomTB250":"sp_901",
      "uuu_rsv_reservable":"Yes"
    },
    {
      "uuu_rsv_overbook":"No overbooking",
      "uBuildingName":"Building_01",
      "space_sp_space_name":"Space_004",
      "uSiteName":"Site_01",
      "uuu_sp_level_picker":"floor_01",
      "uplRoomTB250":"sp_901",
      "uuu_rsv_reservable":"Yes"
    }
  ],
  "message": [
    {
      "space_sp_space_name":"Space_003",
      "message":"success"
    },
    {
      "space_sp_space_name":"Space_004",
      "message":"success"
    }
```

```
  ],
  "status": 200
}
```

Status codes are:

1> 200 , for success.
2> 3000, for partial success.

Update Space

PUT /ws/rest/service/v1/space

Purpose

To update Space record. This works only at project or shell .

Input

All parameters should be URL encoded.

Both input & output in JSON format in the body

Update Space Record input JSON

```
{
  "options" :
  {
      "project_number":"Shell/Project number",
      "space_type" : "Space BP name"
  },
  "data": [
    {
      "uuu_rsv_overbook":"No overbooking",
      "uBuildingName":"Building_01",
      "space_sp_space_name":"Space_003",
      "uSiteName":"Site_01",
      "uuu_sp_level_picker":"floor_01",
      "uplRoomTB250":"sp_901",
      "uuu_rsv_reservable":"Yes"
    },
    {
      "uuu_rsv_overbook":"No overbooking",
```

```
      "uBuildingName":"Building_01",
      "space_sp_space_name":"Space_004",
      "uSiteName":"Site_01",
      "uuu_sp_level_picker":"floor_01",
      "uplRoomTB250":"sp_901",
      "uuu_rsv_reservable":"Yes"
    }
  ]
}
```


Input JSON field description:

- project_number (Required): specify the project/shell number to update space record.
- space_type (Required): specify the Space BP name, where record will be Updated.
- space_sp_space_name (Required) : "**space_sp_space_name**" must be provided in "data" to identify space record to be updated.

Output

JSON object containing '**status**', '**data**', '**message**'

Update Space Record output JSON


```
{
  "data": [
    {
      "uuu_rsv_overbook":"No overbooking",
      "uBuildingName":"Building_01",
      "space_sp_space_name":"Space_003",
      "uSiteName":"Site_01",
      "uuu_sp_level_picker":"floor_01",
      "uplRoomTB250":"sp_901",
      "uuu_rsv_reservable":"Yes"
    },
    {
      "uuu_rsv_overbook":"No overbooking",
      "uBuildingName":"Building_01",
      "space_sp_space_name":"Space_004",
      "uSiteName":"Site_01",
      "uuu_sp_level_picker":"floor_01",
```

```
      "uplRoomTB250":"sp_901",
      "uuu_rsv_reservable":"Yes"
    }
  ],
  "message": [
    {
      "space_sp_space_name":"Space_003",
      "message":"success"
    },
    {
      "space_sp_space_name":"Space_004",
      "message":"success"
    }
  ],
  "status": 200
}
```


Status codes are:

1> 200 , for success.

2> 3000, for partial success.

Cost

> **Note**: The integration user must have the required Cost Services Permissions.

Get CBS Codes

POST /ws/rest/service/v1/cost/cbs/list/{project_number}

Purpose

Get list of CBS codes for a project number specified.

The input JSON includes options for fetching the data

Input

All parameters should be URL encoded.

Path Parameter

project_num: Specify the Project number in which the records exists, Project number is mandatory

POST body is a JSON

> **Note**: POST call has input & output both as JSON in the body

```
{
"options":
{
"cost_type":"Capital",
"summary_detail":"true",
"status":"active"
"hierarchy":true
}
}
```

All the options specified are optional.

If hierarchy is not specified, default value is false. Complete hierarchy of the cbs code will be displayed if the value is true.

Output

JSON object containing 'status', 'data', 'message'

message will be present if status is not 200; otherwise, it will be "success".

> **Note**: Cost code attributes defined will be sent in JSON output response.

Get CBS Codes Sample Response

```
{
   "data":[
      {
         "bitemid" : 24,
         "code": "CostB",
         "description": "Desc of CostB",
         "item": " Cost Item",
         "uResProgressAmount": 10,
         "status": "Active",
         "cost_type": "Food",
         "parentid": "1",
```

```
      "orderid": "1",
      "budgetid": "6",
   },
   {
      "bitemid" : 25,
      "code": "CostB~~Cost1",
      "description": "Desc of CostB~Cost1",
      "item": " Cost Item",
      "uResProgressAmount": 10,
      "status": "Active",
      "cost_type": "Food",
      "parentid": "24",
      "orderid": "2",
      "budgetid": "6",
   },
   {
      "bitemid" : 26,
      "code": "Cost1",
      "description": "Desc of Cost1",
      "item": " Cost1 Item",
      "uResProgressAmount": 10,
      "status": "Active",
      "cost_type": "Capital",
      "parentid": "1",
      "orderid": "0",
      "budgetid": "6",
   },
  "codestructure": [
     {
         "treemode": true,
         "segsize": 1,
         "seperator": "-"
      }
  ],
```

```
   ],
   "message":[
      "success"
   ],
   "status":200
}
```

Create CBS Codes

POST /ws/rest/service/v1/cost/cbs/{project_number}

Purpose

Create CBS Codes for the specified Project

Input

All parameters should be URL encoded. Both the input & output are in JSON format, in the body.

Path Parameter

project_number: Specify the Project number. Project number is mandatory.

In the input request: "code" is a Required field.

Notes:

- If the CBS code is given in this format 'A~~B', then CBS code B will be created under A. If the cost code A does not exist, then the CBS code A will be created first, before creating the CBS code B under it.
- If the input code does not contain delimiter '~~', then that CBS code will be created under valid 'parentid'. If the 'parentid' is not available in the input request, then the code will be created under root.
- If the input code has delimiter '~~', and the 'parentid' is included in input request, then the 'parentid' will be ignored, and the code will be created as per hierarchy in the code.
- If multiple codes are sent in one request, and if the creation of one of the codes fails, then the entire request will be canceled.

Create CBS code input JSON

```
{
    "data": [
        {
            "code": "CostB~~Cost1",
            "description": "Creating Cost Code using REST webservice",
```

```
            "item": " Cost Item",
            "uResProgressAmount": 10,
            "status": "Active",
            "cost_type": "Food"
        },
        {
            "code": "Cost1",
            "description": "Creating Cost Code using REST webservice",
            "item": "Cost1 Item",
            "uResProgressAmount": 10,
            "status": "Active",
            "cost_type": "Capital"
        }
    ]
}
```


Output

JSON object containing 'status', 'data', 'message'

Create CBS Code output JSON


```
{
   "data":[
      {
         "bitemid" : 24,
         "code": "CostB",
         "description": "Creating Cost Code using REST webservice",
         "item": " Cost Item",
         "uResProgressAmount": 10,
         "status": "Active",
         "cost_type": "Food",
         "parentid": "23",
         "orderid": "1",
         "budgetid": "6",
      },
      {
```

```
            "bitemid" : 25,
            "code": "CostB~~Cost1",
            "description": "Creating Cost Code using REST webservice",
            "item": " Cost Item",
            "uResProgressAmount": 10,
            "status": "Active",
            "cost_type": "Food",
            "parentid": "24",
            "orderid": "2",
            "budgetid": "6",
         },
         {
            "bitemid" : 26,
            "code": "Cost1",
            "description": "Creating Cost Code using REST webservice",
            "item": " Cost1 Item",
            "uResProgressAmount": 10,
            "status": "Active",
            "cost_type": "Capital",
            "parentid": "1",
            "orderid": "0",
            "budgetid": "6",
         }
      ],
      "message":[
         "success"
      ],
      "status":200
}
```


Update CBS Codes

PUT /ws/rest/service/v1/cost/cbs/{project_number}

Purpose:

Update CBS Codes for the specified Project.

Input:

All parameters should be URL encoded.

Path Parameter

- project_number: Specify the Project number. Project number is mandatory.
- input query parameter -

  options=

  ```
  {
  "key": "bitemid"
  }
  ```
- Based on the key value provided in 'options' parameter, required field will be chosen. If key value is not given then 'code' will be considered as required field.
- "key" <<code>,<bitemid>>

> **Notes**:
>
> - The complete path from parent to child CBS code (separated by delimiter '~~') should be given in code field of input request if code is chosen as value for key.
> - The "orderid" and "parentid" cannot be updated. All other cost attributes can be updated.
> - The value in the CBS code field can be updated when the value of key in options parameter is '"bitemid."
> - Partial Update is not allowed.

Update CBS code input JSON

```
{
    "data": [
        {
         "bitemid": "26",
         "code": "CostX"
         "description": "Updating Cost Code using REST webservice",
         "status": "InActive"
        }
    ]
}
```

Output:

JSON object containing 'status', 'data', 'message'

Update CBS Code output JSON

```
{
   "data":[
      {
         "bitemid" : 26,
         "code": "CostX",
         "description": "Updating Cost Code using REST webservice",
         "item": " Cost1 Item",
         "uResProgressAmount": 10,
         "status": "inactive",
         "cost_type": "Capital",
         "parentid": "1",
         "orderid": "0",
         "budgetid": "6",
      }
   ],
   "message":[
      "success"
   ],
   "status":200
}
```


Get Column Data

GET /ws/rest/service/v1/cost/columndata/{project_number}

Purpose:

Get column data of all rows / lineitems of cost sheet for a given column name

Input:

All parameters should be URL encoded.

Path Parameter

project_number(Required): Specify the project/shell number to get column data of project cost sheet

Query Parameter

columnname(Required): Specify the column name of cost sheet.

Both input & output in JSON format in the body.

Output:

JSON object containing 'status', 'data', 'message'

Get Column Data output JSON


```
{
  "data": [
    {
      "wbs_code": "Cost Code 1",
      "short_description": "Direct Entry Line Item",
      "amount": "1000.0",
      "spends_category": "",
      "quantity": "10.0",
      "work_package": "",
      "unit_of_measure": "each",
      "unit_cost": "100.0",
      "long_description": ""
    },
    {
      "wbs_code": "Cost Code 2",
      "short_description": "Direct Entry Line Item",
      "amount": "100.0",
      "spends_category": "",
      "quantity": "10.0",
      "work_package": "",
      "unit_of_measure": "",
      "unit_cost": "10.0",
      "long_description": ""
    }
  ],
  "message": [
    "success"
  ],
  "status": 200
}
```


Status codes are:

1> 200, for success

Update Column Data

PUT /ws/rest/service/v1/cost/columndata/{project_number}

Purpose:

Update column data of all rows / lineitems of cost sheet for a given column name

Input:

All parameters should be URL encoded.

Path Parameter

project_number(Required): Specify the project/shell number to update column data of project cost sheet

Query Parameter

columnname(Required): Specify the column name of cost sheet.

Both input & output in JSON format in the body

Update Column Data input JSON


```
{
    "data": [
    {
      "wbs_code": "Code 1",
      "short_description": "Code 1 Description",
      "amount": "20.0",
      "spends_category": "",
      "quantity": "2.0",
      "work_package": "",
      "unit_of_measure": "each",
      "unit_cost": "10.0",
      "long_description": ""
    },
    {
      "wbs_code": "Code 2",
      "short_description": "Code 2 Description",
      "amount": "90.0",
      "spends_category": "",
      "quantity": "3.0",
```

```
      "work_package": "",
      "unit_of_measure": "fl. oz",
      "unit_cost": "30.0",
      "long_description": ""
    },
    {
      "wbs_code": "Code 3",
      "short_description": "Code 3 Description",
      "amount": "160.0",
      "spends_category": "",
      "quantity": "4.0",
      "work_package": "",
      "unit_of_measure": "",
      "unit_cost": "40.0",
      "long_description": ""
    },
    {
      "wbs_code": "Code 3",
      "short_description": "Code 3 Description",
      "amount": "250.0",
      "spends_category": "",
      "quantity": "5.0",
      "work_package": "",
      "unit_of_measure": "yd.",
      "unit_cost": "50.0",
      "long_description": ""
    }
  ],
  "message": [
    "success"
  ],
  "status": 200
}
```

> **Note**: Data of all rows must be provided in the request; otherwise, their respective line items will be deleted and amounts of the rows which are not part of request will be reset to 0.

Output:

JSON object containing 'status', 'data', 'message'

Update Column Data output JSON


```
{
    "data": [
    {
      "wbs_code": "Code 1",
      "short_description": "Code 1 Description",
      "amount": "20.0",
      "spends_category": "",
      "quantity": "2.0",
      "work_package": "",
      "unit_of_measure": "each",
      "unit_cost": "10.0",
      "long_description": ""
    },
    {
      "wbs_code": "Code 2",
      "short_description": "Code 2 Description",
      "amount": "90.0",
      "spends_category": "",
      "quantity": "3.0",
      "work_package": "",
      "unit_of_measure": "fl. oz",
      "unit_cost": "30.0",
      "long_description": ""
    },
    {
      "wbs_code": "Code 3",
      "short_description": "Code 3 Description",
      "amount": "160.0",
```

```
      "spends_category": "",
      "quantity": "4.0",
      "work_package": "",
      "unit_of_measure": "",
      "unit_cost": "40.0",
      "long_description": ""
    },
    {
      "wbs_code": "Code 3",
      "short_description": "Code 3 Description",
      "amount": "250.0",
      "spends_category": "",
      "quantity": "5.0",
      "work_package": "",
      "unit_of_measure": "yd.",
      "unit_cost": "50.0",
      "long_description": ""
    }
  ]
  "message": [
    "success"
  ],
  "status": 200
}
```


Status codes are:

1> 200, for success

Sort Cost Sheet

PUT /ws/rest/service/v1/cost/cbs/sort

Purpose:

This sorts the WBS codes present in the Project Cost Sheet.

Notes:

- Do not perform any other actions when the RESTful web service for

Sort Cost Sheet Web Service is being executed by the system.

- When one user is manually sorting from the UI and at the same time another user sorts from RESTful, the system prevents the RESTful sorting to override the manual sorting.

Input:

There are three input parameters for the web service call:

Project number

project_number(Required): Specify the project/shell number to update column data of project cost sheet

If the user enters a wrong project number and the web service call fails, then the existing error code on incorrect project number will be used to report the error to the user.

Note: The Sort Cost Sheet must be used only for one project at a time.

Type

This is an optional parameter, and if the parameter is not present, then the project Cost Sheet will be sorted based on the CBS codes.

Default value will be CBS

Identifier for the column (the column that the sorting must happen)

The only supported value is: CBS

Sort order

This is an optional input parameter.

Default value will be ascending

sortOrder: Identifier to define the sort order (ascending or descending).

The values are: 'asc' or 'desc'.

Note: The user should not perform any action when sortCostSheet web service is being executed.

Output:

JSON object containing 'status', 'data', 'message'

The message will be present if status is not 200; otherwise, it will be "success".

Additional Information

The following are the rules for sorting:

- For a flat structured Project Cost Sheet, there will be a simple alphanumeric sort on all the segment codes. The sorting will be case insensitive.
- For a tree structured Cost Sheet, the level sorting will happen first (the parent level first followed by the child level). Further alphanumeric sorting will happen within the level. The sorting will be case insensitive.

Sample

URL: http://cegbu137.oraclecorp.com:7001/ws/rest/service/v1/cost/cbs/sort

Body:

```
{
"options":
{
    "type":" CBS",
    "sortOrder":"desc",
    "projectNumber":"proj-3"
}
}
```

Response:

```
{
    "data": [],
    "message": [],
    "status": 200
}
```

Cash Flow

> **Note**: The integration user must have the required Cashflow Services Permissions.

1) Properties (Project/Shell, Summary CBS, CBS, Commitment)
   a. Get Properties
   b. Create Properties
   c. Update Properties
2) Detail Curve (Baseline, Spends, Forecast, Custom, Derived, Portfolio Budget)
   a. Get Detail Curve
   b. Update Detail Curve
   c. Delete Curve
3) Refresh Curve
4) Get Templates
5) Schedule Refresh Curve
6) Add/update CF permission
7) GET Property by prop_name (one record)

Authorization

Update Effective Date deletion of profile.

For more information, see the **Authentication** section in ***REST Services V1***.

Ensure that the integration user has the required cash flow services permissions.

Definitions or Values Used

DE	Value	Label	Display UI Text
rollup_status	0	Active	Active
rollup_status	1	Inactive	Inactive
detail_level	0	Project / Shell	Project / Shell
detail_level	1	CBS	CBS
detail_level	2	Summary CBS	Summary CBS
detail_level	3	Commitment	Commitment
period_type	No	Standard Planning Period	Standard Planning Period
period_type	Yes	Financial Periods	Financial Periods
inc_spends_opt	0	next_month	The next month if after the cutoff date
inc_spends_opt	2	same_month	The same month as the effective date
distribution >type	0	manual	Manual
distribution >type	2	manual_autodistribution	manual auto distribute by default profile

distribution >type	3	schedule_sheet	Use data from Schedule Sheet
distribution >type	4	p6_sheet	Use data from P6 Source
Cost >Type	0	manual	Manually enter amounts for each period
Cost >Type	1	auto_distribution	Auto distribute total amount across all periods
Cost >Type	2	cost_sheet	Distribute amount from cost sheet column
Cost >Type	3	p6_sheet	Use Actuals from P6 Summary Sheet
Schedule >Type	0	manual	Manual
Schedule >Type	1	schedule_sheet	Use dates from Schedule Sheet
Schedule >Type	2	p6_sheet	Use dates from P6 Source
Schedule >Type	3		
Filter >Type	0	all	All CBS codes from cost sheet
Filter >Type	1	summary_cbs	Select summary CBS codes
Filter >Type	2	cbs	Select CBS codes
Forecast > Option	TRUE	begin_end_of_curve	Begin calculations at

			end of curve
Forecast > Option	TRUE	current_actual_cut_off_date	Replace current period forecast with Actuals on cut Off date
Distribute unassigned amounts from Spends			
Distribute unassigned amounts from Spends	0	weighted_avg_all_periods	Using weighted average over all remaining periods
Derived > Float Rate Option			
Derived > Float Rate Option	0	beginning_period	At the beginning of the period
Derived > Float Rate Option	1	end_period	At the end of the period
Derived > Float Rate Option	2	weighted_period	A weighted average for the period
Detail level > Commitment Granularity	0	single_distribution	Single distribution of sum of base commit and all changes
Detail level > Commitment Granularity	1	individual_record	By individual record(base commit and all changes separately)
Detail level > Commitment	2	by_lineitem	By line items within each individual

Granularity			record
Distribution method	0	manual	
Distribution method	1	Autodistribution_manual	Autodistribution - manual dates and profile
Distribution method	1	Autodistribution_bp {bp:"",from:"",to:"",profile:""}	Autodistribution - BP dates and default profile selection
Commit change Processes		BP : Status	

Response Error Codes (REST API Details in Cash Flow)

Code	Message	Details
200	success	If the request is successful
500	Server Error, contact the system administrator.	If there is any exception when running this service
505	token+" is not present, it is required in the formula:"+value+" for field "+name	If the data provided is not correct like pull down with a label which does not exist.
602	Project/Shell Number is not correct	project number is incorrect or does not exists
603	Business Process Name is not correct	"bpname" is not specified in the input JSON and or is invalid value
651	CBS Code is not present.	"cbs_code" is not present in the input JSON
657	Invalid record_no.	"record_no" value is not

Code	Message	Details
		specified in the input JSON or is invalid value.
663	Status field value is not correct.	If status value is not valid i.e it is neither active nor inactive
701	Invalid Column Name	If column name given in the filter condition does not belong to funding sheet
1101	Empty or Invalid JSON data	If required input JSON is empty
1301	Cash Flow name is not present in input request	
1302	Cash Flow Template name provided is not valid	
1303	Cash Flow data provided is not valid for field :	If invalid data is provided in input JSON for fields
1304	Required Cash Flow data is not provided for field :	If data is not provided in input JSON for mandatory fields
1305	Cash Flow do not exist	Cash flow record with given property name does not exist
1306	System-defined Summary Cash Flow Curve cannot be deleted	
1307	Cash Flow not Found	
1308	Summary Cash Flow Curve name already exists	If the name exists when creating cash flow summary
1309	More than one Cash Flow Curve is required to create a Summary Cash Flow Curve	
1310	Error in creating Summary Cash Flow Curve	
1311	Created Summary Cash Flow Curve without these invalid Cash Flow Curve(s):	
1312	Cannot create Summary Cash Flow Curve since all	

Code	Message	Details
	Cash Flow Curve(s) are invalid	
1313	Summary Cash Flow Curve name is required	
1314	Cash Flow name provided already exists.	
1315	Cost sheet is required for detail_level CBS/Summary CBS/Commitment.	
1316	Cost sheet is required for Summary CBS/CBS filters.	
1317	Financial Period is not assigned to the shell.	
1318	Filter Type Summary CBS can only be assigned to Tree mode of Cost sheet.	
1319	Cash Flow Template name is required.	
1320	Request is valid for Shell or Project	If the request is not valid for company.
1321	Template Number is not correct.	
1322	Invalid Job ID.	
1323	Job processing failed with errors.	
1324	Detail curve is not present in the Cash Flow	when performing get data for a cash flow which doesn't have a detail curve.
1325	This operation is not supported on Inactive or View-only Shell/Project	
1326	Detail curves cannot be created for Template	
1327	Summary Cash Flow status Should be 'Active' or 'Inactive'.	
1328	Request is not valid for shell template.	

Code	Message	Details
1329	<different validation error for different fields in input JSON>	If fields provided in input JSON fails validation.
1330	Cash Flow Curve do not exist	If Update/Delete curve request input JSON contains curve details which does not exists on given Cash Flow
1331	Error in deleting Cash Flow Curve	
1332	No Curves are defined for this Cash Flow	If Update/Delete curve request input JSON contains curve details for Cash Flow which does not have any curve.
1333	Rollup Cash Flow name is required	Name is a required field in Rollup curve creation
1335	Rollup curves can be created/updated only for Company	Rollup curves can be created only for company
1336	Detail curves cannot be updated for Template	
1337	Distribution Profile do not exist	
1338	Distribution Profile is used in Cash Flows Curves	
1339	filter parameter is required	For GET cash flow data & summary cash flow data , filter parameter is required.
1340	filter parameter is invalid	If filter condition is invalid for GET cash flow data
1341	Error in updating the Cash Flow Data	
1342	Value for Number is not provided in the input data	
1343	Value for No is not provided in the input data	Value for Line Number is not provided in the input data
1344	Number or No has invalid	

Code	Message	Details
	value in the input data	
1345	Date values provided in the input is invalid	
1346	Profile name is invalid in the input request	
1347	Total value is invalid in the input request	
1348	Update data is not allowed	
1349	Cash Flow Curve name is not present in input request	
1350	Invalid CBS Code	
1351	From date is not set	
1352	To date is not set	
1353	Invalid distribution amount	
1354	Provided Currency is not a valid transaction currency	
1355	Duplicate data exists in details	
1356	Cash Flow operations are not possible on Generic type of Project	
1357	Rollup Cash Flow Curve does not exist	
1368	Create/update request contains conflicting values for noenddate and enddate	
1359	Cash Flow id is required	
1360	Cash Flow Curve details are not present in the input request	If input JSON for update cash flow data contains curves but curve details are not provided
1361	Project number is required	This error is raised if cash flow data update REST call is for Company level
1362	Detail level Summary CBS cannot have filters of type CBS	

Code	Message	Details
1363	Detail level CBS cannot have filters of type Summary CBS	
1364	GET Detail curves operation is not supported for Template/Company	
1365	From Date should be greater than Financial Period Start Date and Less than Financial Period End Date	
1367	To Date should be less than Financial Period End Date and Greater than Financial Period Start Date	
1368	Cannot update distribution as dates are not defined for this Cash Flow curve	
1369	No data are updated as both setup and distribution options are not set	
1370	Cash Flow data provided cannot be updated for the field :	
3000	Partial failure.	Partial failure of REST service
3002	Invalid input	If input JSON did not contain the "data"/required parameter
3003	Business Process is not Active.	When fund consumption is performed on a inactive BP
13001	Project/Shell number is mandatory and is missing in the input request	When no project number is provided
13002	Cashflow curve name is mandatory and is missing in the input request	When curve name is not provided
13003	Invalid curve name provided in input request	When curve name provided no longer exists

Code	Message	Details
13004	Provide a snapshot name	When snapshot name is not provided
13005	Snapshot name already exists	When snapshot name exists
13006	Snapshot name specified does not exist in the cashflow <name>	When snapshot name does not exist for selected curve
13007	The selected curve name is a summary type, and summary snapshots are not supported through integration	When summary type curve is processed
13008	Snapshots <name1>, <name2> do not exist in the selected cash flow curve <curve name>.	When none of the provided snapshot names exist in the selected cashflow curve
13009	Snapshots <name1>, <name2>, <name3> do not exist in the cash flow curve <curve name>.	When some cashflow names in the delete request are invalid
13010	Cash Flow snapshot name cannot exceed 64 characters.	When snapshot name exceeds 64 characters

Create Cash Flow

POST /ws/rest/service/v1/cashflow/{project_number}

Purpose:

Create cash flow from a template or by specifying the property values.

If the template name is provided, cash flow properties are created from a template in combination with input parameters specified in the request.

If template_projectid is not provided, the company template will be fetched.

Integration user used will have full access to the cash flow created. To change the permissions, **Update or Modify Cashflow Permission** service need to be run.

In addition to integration user, project administrator/company administrator will have full access to the cash flow created from service.

Period name is not accepted from the input JSON. If provided, will be ignored.

Irrelevant attributes specified in the request for create/update are ignored.

Input:

All parameters should be URL encoded.

Path Parameter

project_number: Required

When creating cash flow from template, specify the below values in the data JSON.

template_name:Required

template_project: optional. Project number of the template.

Post data JSON will be details of cash flow

For the input attributes provided, the data will be used from the input request:

Example

If name, template, and schedule details are specified in the input request, then the cash flow will be created with template details but the schedule will be as per the input request.

Defaults will be used if data is not provided in the input request.

JSON object containing 'status', 'data', 'message'

A message will be present if the status is not 200; otherwise, it will be "success".

The user can provide Effective_date in Actuals Curve at CBS/Summary CBS level if Set Effective Date is selected as Yes.

Format is mentioned in Actuals Curve Request, below:

Create Cash Flow From Template Only

```
{
    "data":
        {   "template":"Project Cash Flow - Cost Controls",
            "template_project":"T-001",
            "name": "fromtemplate"
       }

}
```

Create Cash Flow Manual - Project or Shell

```
{
    "data":
        {
            "name": "project type cashflow",
```

```
 "description": null,
 "rollup_status": "Active",
 "detail_level": "Project / Shell",
 "period_type": "Standard Planning Period",
 "period_name": "Standard Planning Period",
 "period_by": "Month",
 "period_format": "M YYYY",
 "decimal_places": 2,
 "decimal_option": "0"
"snapshot": {
    "sn_week_num": "First",
    "sn_week_day": "Sunday",
    "cutoff_spends": {
        "cutoff_week_num": "First",
        "cutoff_week_day": "Sunday",
        "inc_spends_opt": "same_month"
    }
 },
 "schedule": {
    "enable_refresh": false
 },

 "summary": [
    {
        "name": "summary",
        "summary_type": "User_Defined"
    }
 ],
 "curves": [
    {
        "name": "Actuals",
        "type": "Spends",
        "cost": {
```

```
                        "type":"cost_sheet",
                        "cost_sheet_column": "152 Base Commit WF
(Approved)"
                    }
                },
                {
                    "name": "Cash flow3",
                    "type": "Derived",
                    "cost": {
                        "base_currency": "United States Dollar (USD)",
                        "source_curve_name": "Actuals",
                        "derived_curve_currency": "Australia Dollar
(AUD)",
                        "exchange_rate": "Peg",
                        "peg_rate_as": "Dynamic",
                        "peg_dynamic_ds": "Single Record BPs / 922_Simple
PNW/FSingle LL",
                        "peg_dynamic_de": "Currency amount 1",
                        "float_rate_as": "weighted_period"
                    }
                },
                {
                    "name": "Today",
                    "type": "Portfolio Budget",
                    "cost": {
                        "currency_code": "Australia Dollar (AUD)",
                        "distribut_amount_from": "approved"
                    }
                },
                {
                    "name": "Forecast",
                    "type": "Forecast",
                    "distribution": {
                        "type": "auto_profile",
```

```
                    "distribution_profile": "Front Load"
                },
                "cost": {
                    "type": "cost_sheet",
                    "cost_sheet_column": "152 Base Commit WF (Open)"
                },
                "schedule": {
                    "type": "manual"
                },
                "forecast_options": {
                    "begin_end_of_curve": true,
                    "fc_curve_name": "Actuals",
                    "current_actual_cut_off_date": true,
                    "fc_dist": "weighted_avg_over_next",
                    "periods": 3
                }
            }
        ]
    }

}
```

Create Cash Flow Manual - CBS

```
{
    "data":
        {
           "name": "cbsfromservice",
            "description": "cbs type",
            "rollup_status": "Active",
            "detail_level": "CBS",
            "period_type": "Standard Planning Period",
            "period_name": "Standard Planning Period",
            "period_by": "Month",
            "period_format": "M YYYY",
```

```
        "decimal_places": 2,
        "snapshot": {
            "sn_dayof": 1,
            "cutoff_spends": {
                "cutoff_week_num": "First",
                "cutoff_week_day": "Sunday",
                "inc_spends_opt": "same_month"
            }
        },
    "filters": {
            "filter_option": "cbs",
            "cbs": [
                {
                    "cbs_code": "16000~~16700",
                    "bitemid": 235,
                    "item": "Communications"
                },
                {
                    "cbs_code": "99999",
                    "bitemid": 237,
                    "item": "Contingencies"
                }
            ]
        },
        "summary": [
            {
                "name": "Cash Flow Summary Curve",
                "summary_type": "System_Defined"
            }
        ],
        "curves": [
            {
                "name": "P6Actuals",
                "type": "Spends",
```

```
                    "cost": {
                        "type":"P6 Summary Sheet",
                        "p6_datasource":"Original Baseline" //"Current
Schedule"
                        "cost_sheet_column": "A_Commit_01 (Approved)"
                    }
                },
                {
                    "name": "custom_Float",
                    "type": "Derived",
                    "cost": {
                        "base_currency": "United States Dollar (USD)",
                        "source_curve_name": "Actuals",
                        "derived_curve_currency": "Bhutan Ngultrum
(BTN)",
                        "exchange_rate": "Float",
                        "float_rate_as": "weighted_period"
                    }
                },
                {
                    "name": "Cash flow3",
                    "type": "Derived",
                    "cost": {
                        "base_currency": "United States Dollar (USD)",
                        "source_curve_name": "Actuals",
                        "derived_curve_currency": "Australia Dollar
(AUD)",
                        "exchange_rate": "Peg",
                        "peg_rate_as": "Dynamic",
                        "peg_dynamic_ds": "Single Record BPs / 922_Simple
PNW/FSingle LL",
                        "peg_dynamic_de": "Currency amount 1",
                        "float_rate_as": "weighted_period"
                    }
                },
```

```
                {
                    "name": "custom_Peg_Constant",
                    "type": "Derived",
                    "cost": {
                        "base_currency": "United States Dollar (USD)",
                        "source_curve_name": "Actuals",
                        "derived_curve_currency": "Bhutan Ngultrum
(BTN)",
                        "exchange_rate": "Peg",
                        "peg_rate_as": "Constant",
                        "peg_constant_value":"1"
                    }
                },
                {
                    "name": "custom_Peg_Project",
                    "type": "Derived",
                    "cost": {
                        "base_currency": "United States Dollar (USD)",
                        "source_curve_name": "Actuals",
                        "derived_curve_currency": "Bhutan Ngultrum
(BTN)",
                        "exchange_rate": "Peg",
                        "peg_rate_as": "Project"
                    }
                },
                {
                    "name": "Today",
                    "type": "Portfolio Budget",
                    "cost": {
                  "currency_code": "Indian Rupee (INR)",
                  "distribut_amount_from": "approved"
               }
            }
         ]
```

```
    }

}
```

Create Cash Flow Manual - Summary CBS

```
{
    "data":
        {
            "name": "Manual Curve",
            "detail_level": "CBS",
            "curves": [
                {
                    "name": "Actuals",
                    "type": "Spends",
                    "cost": {
                        "type":"cost_sheet",
                        "cost_sheet_column": "152 Base Commit WF
(Approved)"
                    }
                },
                {
                    "name": "Today",
                    "type": "Portfolio Budget",
                    "cost": {
                        "currency_code": "Australia Dollar (AUD)",
                        "distribut_amount_from": "original"
                    }
                },
                {
                    "name": "Cash flow1",
                    "type": "Derived",
                    "cost": {
                        "base_currency": "United States Dollar (USD)",
                        "source_curve_name": "Today",
```

```
                        "derived_curve_currency": "Afghani (AFN)",
                        "exchange_rate": "Peg",
                        "peg_rate_as": "Dynamic",
                        "peg_dynamic_ds": "Single Record BPs / 922_Simple
PNW/FSingle LL",
                        "peg_dynamic_de": "Integer Amount 1",
                        "float_rate_as": "weighted_period"
                    }
                }
            ]
        }

}
```

Create Cash Flow Manual - Commitment

```
{
    "data":
        {
            "name": "commitment",
            "description": "commitment",
            "rollup_status": "Active",
            "detail_level": "Commitment",
            "bp_name": "Purchase Orders",
            "reference_elements": "record_no:upoPONumberTXT16",
            "base_commit_record": "PO-0001",
            "period_type": "Standard Planning Period",
            "period_name": "Standard Planning Period",
            "period_by": "Month",
            "period_format": "M YYYY",
            "decimal_places": 2,
             "schedule": {
                "enable_refresh": true,
                "frequency": "Weekly",
                "weekday": "Sunday",
```

```
                "startdate": "06/10/2019 12:00 AM",
                "noenddate": false,
                "enddate": "06/24/2019 12:00 AM"
            },
            "summary": [
                {
                    "name": "Cash Flow Summary Curve",
                    "summary_type": "System_Defined"
                },
                {
                    "name": "summary",
                    "summary_type": "User_Defined"
                }
            ]
        }
            "curves": [
                {
                    "name": "commitActuals",
                    "type": "Spends",
                    "cashflow_granularity": "by_lineitem", // "" or
"single_distribution"
                    "cost": {
                        "spends_bp": [{"bp_name" :"A_Commit_01",
"status":"Approved"}]
                    }
                },
                {
                    "name": "Today",
                    "type": "Portfolio Budget",
                    "cost": {
                        "currency_code": "Ariary (MGA)",
                        "distribut_amount_from": "original"
                    }
                },
```

```
                {
                    "name": "Cash flow1",
                    "type": "Derived",
                    "cost": {
                        "base_currency": "United States Dollar (USD)",
                        "source_curve_name": "Spend",
                        "derived_curve_currency": "Chile Peso (CLP)",
                        "exchange_rate": "Peg",
                        "peg_rate_as": "Dynamic",
                        "peg_dynamic_ds": "Single Record BPs /
91ProjectinformationBP",
                        "peg_dynamic_de": "% Phase Cmplete",
                        "float_rate_as": "end_period"
                    }
                }
            ]
        }

}
```

Create Summary Curve

POST /ws/rest/service/v1/cashflow/summary/{project_number}

Purpose:

Create Cashflow summary curves.

Input:

All parameters should be URL encoded.

Path Parameter

project_number(Required): Specify the project/shell number.

> **Note:** POST call has input & output both as JSON in the body

In the input request:

"name"(Required).

"status" (Optional): If not specified then the summary curve will be active.

"description" (Optional): If no value is specified, then the summary curve will be created with no description.

"curves" (Optional): List of cash flow curve names, which has to be part of the summary curve. If no value is specified, then the summary curve will be created without any cash flow curve.

Output:

JSON object containing 'status', 'data', 'message'

The data will contain the name and the id of the summary curve which was created successfully. The message will contain the status of the curve creation for all the input data.

Sample input request

```
{
   "data":[
      {
         "name":"summary curve 1",
         "status":"active",
         "description":"This summary curve is created from REST API",
         "curves":[
            "CF For buildings",
            "Curve 1"
         ]
      },
      {
         "name":"summary curve 2",
         "status":"active",
         "description":"This summary curve is created from REST API",
         "curves":[
            "Manual curve 0120",
            "cashflow for bridge 20"
         ]
      }
   ]
}
```

Sample output request

```
{
   "data":[
      {
```

```
            "name":"summary curve 1",
            "id":31
         }
      ],
      "message":[
         {
            "name":"summary curve 1",
            "status":"200",
            "message":"success"
         },
         {
            "name":"summary curve 2",
            "status":"1308",
            "message":"Summary name already exists"
         }
      ],
      "status":3000
}
```


Create Rollup Cash Flows for Company

POST /ws/rest/service/v1/cashflow/rollup/

Purpose:

Create Rollup Cash Flows.

Input:

All parameters should be URL encoded.

Path Parameter

Both input & output in JSON format in the body

In the input request:

"name" (Required)

"status" (Optional): If not specified then by default 'Active' will be taken.

"data_source" (Optional): List of data sources, which has to be part of the rollup curve. If no value is specified then the rollup curve will be created without any data sources.

"period_type" (Required): If no value is given then by default "Standard Planning Period" will be taken

"period_by": Is Required if period_type is "Standard Planning Period" and by default 'Year' will be taken.

"period_format": Is Required if period_type is "Standard Planning Period" and by default 'YYYY' will be taken.

"period_name": Is Required if period_type is "Financial Periods"

"decimal_places" (Optional)

Output:

JSON object containing 'status', 'data', 'message'

The data will contain the name and the id of the rollup curve which was created successfully. The message will contain the status of the curve creation for all the input data.

Status codes are:

1> 200 , for success

2> 3000, for Partial success.

Create Rollup Cash Flows Input JSON

```
{
    "data": [
        {
            "template": "Rollup Template"
            "name": "Rollup Curve 1",
            "status": "Active",
            "period_type": "Standard Planning Period",
            "period_name": "Standard Planning Period",
            "period_by": "Year",
            "period_format": "YYYY",
            "decimal_places": 5,
            "data_source": [
                {
                    "name": "Baseline",
                    "curve_type": "Baseline"
                },
                {
                    "name": "Vendor Approved Budget",
                    "curve_type": "Baseline"
                }
            ]
```

```
        },
        {
            "name": "Rollup Curve 3",
            "status": "Active",
            "period_type": "Financial Periods",
            "period_name": "FP",
            "decimal_places": 5,
            "data_source": []
        }
    ]
}
```

Create Rollup Cash Flows Output JSON

```
{
   "data":[
      {
         "id": "208"
         "name": "Rollup Curve 1",
         "status": "Active",
         "period_type": "Standard Planning Period",
         "period_name": "Standard Planning Period",
         "period_by": "Year",
         "period_format": "YYYY",
         "decimal_places": 5,
         "data_source": [
             {
                "name": "Baseline",
                "curve_type": "Baseline"
             },
             {
                 "name": "Vendor Approved Budget",
                 "curve_type": "Baseline"
             }
          ]
```

```
      }
   ],
   "message":[
      {
         "name":"Rollup Curve 1",
         "status":"200",
         "message":"success"
      },
      {
         "name":"Rollup Curve 3",
         "status": 1303,
         "message": "CashFlow data provided is not valid for field :
period_name"

      }
   ],
   "status":3000
}
```


Update Rollup Cash Flows for Company

PUT /ws/rest/service/v1/cashflow/rollup/

Purpose:

Update Rollup Cash Flows.

Input:

All parameters should be URL encoded.

Path Parameter

Both input & output in JSON format in the body

In the input request:

"id" is a required field

Output:

JSON object containing 'status', 'data', 'message'

The data will contain the name and the ID of the rollup curve which was created successfully. The message will contain the status of the curve creation for all the input data.

Status codes are:

1> 200 , for success

2> 3000, for Partial success.

Update Rollup Cashflows Input JSON

```
{
    "data": [
        {
            "name": "Rollup Curve 1",
            "status": "Active",
            "period_type": "Standard Planning Period",
            "period_name": "Standard Planning Period",
            "period_by": "Month",
            "period_format": "M YYYY",
            "decimal_places": 3
        },
        {
            "name": "Rollup Curve 2",
            "status": "Active",
            "period_type": "Financial Periods",
            "period_name": "FP1",
            "decimal_places": 5,
            "data_source": [
                    {
                        "name": "Baseline"
                    },
                    {
                        "name": "Vendor Approved Budget",
                        "action": "delete"
                    }
            ]
        }
    ]
}
```

Update Rollup Cashflows Output JSON

```
{
   "data":[
      {
         "id": "208"
         "name": "Rollup Curve 1",
         "status": "Active",
         "period_type": "Standard Planning Period",
         "period_name": "Standard Planning Period",
         "period_by": "Month",
         "period_format": "M YYYY",
         "decimal_places": 3,
         "data_source": [
             {
                "name": "Baseline",
                "curve_type": "Baseline"
             },
             {
                 "name": "Vendor Approved Budget",
                 "curve_type": "Baseline"
             }
          ]
      },
      {
         "id": 198,
         "name": "Rollup Curve 2",
         "description": "description",
         "status": "Active",
         "period_type": "Financial Periods",
         "period_name": "FP1",
         "period_by": "Custom",
         "decimal_places": 5,
         "data_source": [
             {
                "name": "Baseline",
```

```
                "curve_type": "Baseline"
            }
         ]
      }
   ],
   "message":[
      {
         "name":"Rollup Curve 1",
         "status":"200",
         "message":"success"
      },
      {
         "name":"Rollup Curve 2",
         "status": "200",
         "message": "success"

      }
   ],
   "status":200
}
```


Delete Cash Flow

PUT/ws/rest/service/v1/cashflow/{project_number}

> **Note:** The owner permissions cannot be deleted via REST or Web Services.

Purpose:

Delete detail/rollup cash flows

Input:

All parameters should be URL encoded.

Path Parameter

project_number (Optional): Specify the project/shell number to delete the cash flows of project; otherwise, to delete the company rollup curves

Both input & output in JSON format in the body

Output:

JSON object containing 'status', 'data', 'message'

Status codes are:

1> 200, for success.

2> 3000, for Partial success.

Delete Cash Flow Input JSON

```
{
    "data": {
        "names": ["Cash Flow 1","Cash Flow 2"]
    }
}
```

Delete Cash Flow Ouput JSON

```
{
    "data": [],
    "message": [
        {
            "status": 200,
            "message": "success",
            "name": "Cash Flow 1"
        },
        {
            "status": 1305,
            "message": "Cash Flow do not exist",
            "name": "Cash Flow 2"
        }
    ],
    "status": 3000
}
```

Delete Cash Flow Curve

DELETE /ws/rest/service/v1/cashflow/curve/{project_number}

Version: 19.7

PUT /ws/rest/service/v1/cashflow/delete/curve/{project_number}

Version: 22.11

Purpose:

Delete cashflows curves

Input:

All parameters should be URL encoded.

Path Parameter

project_number (Required): Specify the project/shell number.

In input request JSON:

"name" (Required): Specify the cashflow name

"curves"(Required): Specify an array of curve names that need to be deleted.

Output:

JSON object containing 'status', 'data', 'message'

Sample input request

```
{
    "data": {
        "name":"Cashflow 1"
        "curves": ["Spends","Dervied 1"]
    }
}
```

Sample output request

```
{
    "data": [],
    "message": [
        {
            "status": 200,
            "message": "success",
            "name": "Spends"
        },
```

```
        {
            "status": 200,
            "message": "success",
            "name": "Dervied 1"
        }
    ],
    "status": 200
}
```

Delete Cash Flow - Summary Curves

DELETE /ws/rest/service/v1/cashflow/summary/{project_number}

Version: 19.7

PUT /ws/rest/service/v1/cashflow/delete/curve/{project_number}

Version: 22.11

Purpose:

Delete summary cash flow

Input:

All parameters should be URL encoded.

Path Parameter

project_number(Required): Specify the project/shell number to delete the summary cash flows of project

Both input & output in JSON format in the body

Output:

JSON object containing 'status', 'data', 'message'

Status codes are:

1> 200, for success.
2> 3000, for Partial success.

Delete Cashflow Input JSON

```
{
    "data": {
        "names": ["Summary Cash Flow 1","Cash Flow Summary Curve"]
    }
}
```

Delete Cashflow Output JSON


```
{
    "data": [],
    "message": [
        {
            "status": 200,
            "message": "success",
            "name": "Summary Cash Flow 1"
        },
        {
            "status": 1306,
            "message": "System-defined Summary Cash Flow Curve cannot be
deleted",
            "name": "Cash Flow Summary Curve"
        }
    ],
    "status": 3000
}
```


Get Cash Flow Data

GET /ws/rest/service/v1/cashflow/data/{project_number}

Purpose:

Get cash flow curve data.

Input:

All parameters should be URL encoded.

Path Parameter

project_number(Optional): Specify the project/shell number. If no value is specified, then company level cash flow data will be retrieved.

Url Parameter

filter (Required): Filter condition to be used when retrieving the data. It is a JSON object with the below information:

"name"(Required): Specify the cash flow name to get the data

"curves"(Optional): Specify the curve name for which the data is to be retrieved. Invalid curve name will be ignored. If no value is specified, then all the curves data will be sent in the response.

Sample filter parameter

```
filter={  "name":"cashflow 1",   "curves":[  "Baseline", "Forecast"  ] }
```

Output:

JSON object containing 'status', 'data', 'message'

Status codes are:

1> 200 OK if success

For Partial failure, the relevant message will be displayed.

Sample output request

```
{
   "data":[
      {
         "name":"cashflow 1",
         "alert_message":[
            {
               "projectname":"Shell-Weekly",
               "name":"CF-New",
               "curvename":"Actuals",
               "errormessage":"Curve timescale is yearly"
            },
            {
               "projectname":"SUNEEL-RETEST-YEARLY",
               "name":"CashFlow-Suneel-Retest-Yearly",
               "curvename":"Actuals",
               "errormessage":"Curve timescale is yearly"
            }
         ],
         "curves":[
            {
               "Name":"Baseline",
               "alert_message":"",
               "Currency":"Indian Rupee (INR)",
               "Type":"Baseline",
               "From Date":"01/01/17",
```

```
      "To Date":"12/30/17",
      "Total":"1742.56"
      "Unassigned":"300.90",
      "2 2016":"800.56"
      "details":[
         {
            "Number":"A0001-B0001-C0001-D0001-E0001",
            "Name":"Row-00001",
            "Profile":"Front Load",
            "Total":"1742.56",
            "From Date":"02/29/16",
            "To Date":"12/30/16",
            "Unassigned":"345.90",
            "2 2016":"1742.56"
         },
         {
            "Number":"A0003-B0003-C0003-D0003-E0003",
            "Name":"Row-00003",
            "Profile":"S Curve",
            "Total":"800.56",
            "From Date":"01/01/17",
            "To Date":"12/30/17",
            "Unassigned":"300.90",
            "2 2016":"800.56"
         }
      ]
   },
   {
      "name":"Forecast",
      "Type":"Forecast",
      "alert_message":"",
      "currency":"Indian Rupee (INR)",
      "Total":"800.56",
      "From Date":"02/02/19",
```

```
      "To Date":"04/12/19",
      "Total":"1742.56"
      "Unassigned":"7443.20",
      "2 2016":"689.53"
      "details":[
         {
            "Number":"A0009-B0009-C0009-D0009-E00011",
            "Name":"Row-00011",
            "Profile":"S Curve",
            "Total":"800.56",
            "From Date":"02/02/19",
            "To Date":"04/12/19",
            "Unassigned":"7443.20",
            "2 2016":"689.53"
         },
         {
            "Number":"A0007-B0007-C0007-D0007-E0007",
            "Name":"Row-00007",
            "Profile":"S Curve",
            "Total":"800.56",
            "From Date":"05/05/19",
            "To Date":"12/30/19",
            "Unassigned":"280.43",
            "2 2016":"3321.56"
         }
      ]
   },
   {
      "alert_message":"",
      "Name":"Original",
      "Currency":"Canada Dollar (CAD)",
      "Type":"Portfolio Budget",
      "From Date":"",
      "To Date":"",
```

```
                "Total":"0.00",
                "Unassigned":"0.00",
                "1 2017":"100.00",
                "2 2017":"",

            }
         ]
      }
   ],
   "message":[
      "success"
   ],
   "status":"200"
}
```


Get Summary Cash Flow Data

GET /ws/rest/service/v1/cashflow/summary/data/{project_number}

Purpose:

Get Summary Cash Flow Curve data.

Input:

All parameters should be URL encoded.

Path Parameter

project_number (Required): Specify the project/shell number.

Url Parameter

filter (Required): Filter condition to be used when retrieving the data. It is a JSON object with the below information:

"name"(Required): Specify the cash flow name to get the data

"curves"(Optional): Specify the curve name for which the data is to be retrieved. Invalid curve name will be ignored. If no value is specified, then all the curves data will be sent in the response.

Sample filter parameter

```
filter={  "name":"cashflow 1",   "curves":[  "Baseline", "Forecast"  ] }
```

Output:

JSON object containing 'status', 'data', 'message'

Status codes are:

1> 200 OK, if success.

For Partial failure, relevant message will be displayed.

Sample output request


```
{
   "data":[
      {
         "name":"cashflow 1",
         "alert_message":[
            {
               "projectname":"Shell-Weekly",
               "name":"CF-New",
               "curvename":"Actuals",
               "errormessage":"Curve timescale is yearly"
            },
            {
               "projectname":"SUNEEL-RETEST-YEARLY",
               "name":"CashFlow-Suneel-Retest-Yearly",
               "curvename":"Actuals",
               "errormessage":"Curve timescale is yearly"
            }
         ],
         "curves":[
            {
               "name":"Baseline",
               "alert_message":"",
               "currency":"Indian Rupee (INR)",
               "Type":"Baseline",
               "Total":"1742.56",
               "From Date":"02/29/16",
               "To Date":"12/30/16",
               "Unassigned":"345.90",
               "2 2016":"1742.56"
               "details":[
```

```
            {
               "Number":"A0001-B0001-C0001-D0001-E0001",
               "Name":"Row-00001",
               "Profile":"Front Load",
               "Total":"1742.56",
               "From Date":"02/29/16",
               "To Date":"12/30/16",
               "Unassigned":"345.90",
               "2 2016":"1742.56"
            },
            {
               "Number":"A0003-B0003-C0003-D0003-E0003",
               "Name":"Row-00003",
               "Profile":"S Curve",
               "Total":"800.56",
               "From Date":"01/01/17",
               "To Date":"12/30/17",
               "Unassigned":"300.90",
               "2 2016":"800.56"
            }
         ]
      },
      {
         "name":"Forecast",
          "Type":"Forecast",
         "alert_message":"",
         "currency":"Indian Rupee (INR)",
         "Total":"800.56",
         "From Date":"05/05/19",
         "To Date":"12/30/19",
         "Unassigned":"280.43",
         "2 2016":"3321.56"
         "details":[
            {
```

```
            "Number":"A0009-B0009-C0009-D0009-E00011",
            "Name":"Row-00011",
            "Profile":"S Curve",
            "Total":"800.56",
            "From Date":"02/02/19",
            "To Date":"04/12/19",
            "Unassigned":"7443.20",
            "2 2016":"689.53"
         },
         {
            "Number":"A0007-B0007-C0007-D0007-E0007",
            "Name":"Row-00007",
            "Profile":"S Curve",
            "Total":"800.56",
            "From Date":"05/05/19",
            "To Date":"12/30/19",
            "Unassigned":"280.43",
            "2 2016":"3321.56"
         }
      ]
   },
   {
      "alert_message":"",
      "Name":"Original",
      "Currency":"Canada Dollar (CAD)",
      "Type":"Portfolio Budget",
      "From Date":"",
      "To Date":"",
      "Total":"0.00",
      "Unassigned":"0.00",
      "1 2017":"100.00",
      "2 2017":"",
```

```
            }
         ]
      }
   ],
   "message":[
      "success"
   ],
   "status":"200"
}
```

Get Rollup Status

GET /ws/rest/service/v1/cashflow/rollup/status/{project_number}

Purpose:

Get Cashflow Rollup Status

Input:

All parameters should be URL encoded.

Path Parameter

project_number(Required): Specify the project/shell number to get the rollup status of project cash flows

url parameter(Optional)

filter=

{

"names":["Cash Flow 1" ,"Cash Flow 2"]

}

Filter can be used to filter on name to get the cash flow rollup status. If cash flow does not exist with the given name, then that name will be ignored. Cashflows of other names will be returned.

If project number is not specified in the URL, then error message will be returned

Output:

JSON object containing 'status', 'data', 'message'

Status codes are:

1> 200, for success.

Get Rollup Status Output JSON

```
{
    "data": [
```

```
        {
            "name": "Cash Flow 1",
            "id": "21",
            "status": "Active"
        }
    ],
    "message": [
        "success"
    ],
    "status": 200
}
```

Get Rollup Status - for Template Cash Flows

GET /ws/rest/service/v1/cashflow/template/rollup/status/{template_number}

Purpose:

Get Rollup Status of template cash flows

Input:

All parameters should be URL encoded.

Path Parameter

template_number(Optional): Specify the template number to get the rollup status of template cash flows; otherwise, to get the rollup status of standard template cash flows

url parameter(Optional)

filter=

{

"names":["Cash Flow 1" ,"Cash Flow 2"]

}

Filter can be used to filter on name to get the cash flow rollup status. If cash flow does not exist with the given name, that name will be ignored. Cash flows of other names will be returned.

Output:

JSON object containing 'status', 'data', 'message'

Status codes are:

1> 200, for success.

Get Rollup Status Output JSON

```
{
```

```
    "data": [
        {
            "name": "Cash Flow 1",
            "id": "21",
            "status": "Active"
        }
    ],
    "message": [
        "success"
    ],
    "status": 200
}
```

Update Rollup Status

PUT /ws/rest/service/v1/cashflow/rollup/status/{project_number}

Purpose:

Update Cashflow Rollup status

Input:

All parameters should be URL encoded.

Path Parameter

project_number(Required): Specify the project/shell number to update the rollup status of project cash flow

Both input & output in JSON format in the body

Output:

JSON object containing 'status', 'data', 'message'

Status codes are:

1> 200, for success.

2> 3000, for Partial success.

Update Rollup Status Input JSON

```
{
    "data" : [
                {"name": "Cash Flow 1", "rollup_status": "Inactive"},
                {"name": "Cash Flow 2", "rollup_status": "Open"},
                {"name": "Cash Flow 3", "rollup_status": "Active"}
```

```
    ]
}
```


Update Rollup Status Output JSON


```
{
    "data": [
        {
            "rollup_status": "Active",
            "name": "Cash Flow 1",
            "id": "61"
        }
    ],
    "message": [
        {
            "name": "Cash Flow 1",
            "message": "success",
            "status": 200
        },
        {
            "name": "Cash Flow 2",
            "message": "Status field value is not correct.",
            "status": 663
        },
        {
            "name": "Cash Flow 3",
            "message": "Cash Flow do not exist",
            "status": 1305
        }
    ],
    "status": 3000
}
```


Update Rollup Status - For Template Cash Flows

PUT /ws/rest/service/v1/cashflow/template/rollup/status/{template_number}

Purpose:

Update Rollup status of template cash flows

Input:

All parameters should be URL encoded.

Path Parameter

template_number(Optional): Specify the template number to update the rollup status of template cash flows; otherwise, to update the rollup status of standard template cash flows

Both input & output in JSON format in the body

Output:

JSON object containing 'status', 'data', 'message'

Status codes are:

1> 200, for success.

2> 3000, for Partial success.

Update Rollup Status Input JSON

```
{
    "data" : [
                {"name": "Cash Flow 1", "rollup_status": "Inactive"},
                {"name": "Cash Flow 2", "rollup_status": "Open"},
                {"name": "Cash Flow 3", "rollup_status": "Active"}
    ]
}
```

Update Rollup Status Output JSON

```
{
    "data": [
        {
            "rollup_status": "Active",
            "name": "Cash Flow 1",
            "id": "61"
        }
    ],
    "message": [
        {
            "name": "Cash Flow 1",
            "message": "success",
```

```
            "status": 200
        },
        {
            "name": "Cash Flow 2",
            "message": "Status field value is not correct.",
            "status": 663
        },
        {
            "name": "Cash Flow 3",
            "message": "Cash Flow do not exist",
            "status": 1305
        }
    ],
    "status": 3000
}
```


Refresh Cash Flow

PUT /ws/rest/service/v1/cashflow/refresh/{project_number}

Purpose:

Refresh Cashflow Properties

Input:

All parameters should be URL encoded.

Path Parameter

project_number:Required

Path Parameter

Both input & output in JSON format in the body

{

"names": ["CBS CF", cash_flow_2"]

}

Supported options properties

"names": ["CBS CF", "cash_flow_2"] for one or more values

Or "names": "CBS CF" for only one value

"rollup_status"<<Active><Inactive>> (or "status" in case)

If rollup_status value provided is other than above mentioned values, invalid options message will be thrown.

"detail_level"<<Summary CBS>< CBS><Project / Shell><Commitment>>

If detail_levelvalue provided is other than above mentioned values, invalid options message will be thrown.

Output:

JSON object containing 'status', 'data', 'message'

Status codes are:

1> 200 OK, if success.

For Partial failure, relevant message will be displayed.

Refresh Cashflow Properties Sample Response

1) response when success:

```
{
    "data": "",
    "message": ["http://slc12knf.us.oracle.com:912<server url>/ws/rest/service/v1/cashflow/jobs/1503681423559"],
    "status": 202
}
```

2) response when partial success:

```
{
   "invalid_names": "[Summary1, Curve2]",
   "data": [],
   "message": [
       "http://blr00bti.in.oracle.com:3883/idchyd<server url>/ws/rest/service/v1/cashflow/jobs/1556455198417"
   ],
   "status": 3000
}
```

Get Cash Flow Refresh Job Status

GET /ws/rest/service/v1/cashflow/jobs/{job_id}

Purpose:

To retrieve cash flow refresh job status

Input:

All parameters should be URL encoded.

Path Parameter

job_id: Required

Output:

JSON object containing 'status', 'data', 'message'

Status codes are:

1> 200 OK, if success.

For Partial failure, relevant message will be displayed.

Refresh Cashflow Job status Sample Response

1) on success.

```
{
    "data":"",
    "job_status":"Finished",
    "status_code":200,
    "message":"OK"
}
```

2) when job is in progress.

```
{
    "data":"",
    "job_status":"In progress",
    "status_code":200,
    "message":"OK"
}
```

3) when job has failed.

```
{
    "data":"Failure detail",
    "job_status":"Finished with errors",
    "status_code":1006,
    "message":"Job processing failed with errors."
}
```

Get Cash Flow Properties

GET /ws/rest/service/v1/cashflow/{project_number}

Purpose:

Get cash flow properties

Input:

All parameters should be URL encoded.

Path Parameter

project_number: optional, if not provided then company cash flow will be fetched.

input query parameter -

```
filter=
{
"names":["Cash Flow 1" ,"Cash Flow 2"]
}
```

Supported options in filter:

"names": "CBS CF"

"curve_name": << Name of The Curve>>

"rollup_status"<<Active><Inactive>>

If rollup_status value provided is other than above mentioned values, invalid options message will be thrown.

"detail_level"<<Summary CBS>< CBS><Project / Shell><Commitment>>

If detail_level value provided is other than above mentioned values, invalid options message will be thrown.

"include_curves":<< Yes/ No>> <!-- default is Yes if not provided→>

If include_curves value provided is other than above mentioned values, invalid options message will be thrown.

> **Note:** If no filter options provided service will return all cash flow curves from the project.

Output:

JSON object containing 'status', 'data', 'message'

Status codes are:

1> 200 OK, if success.

For Partial failure, relevant message will be displayed.

Project or Shell

```
{
    "data": [
        {
            "name": "Project_CF",
            "description": "test webservice get Cashflow Properties",
```

```
"rollup_status": "Active",
"detail_level": "Project / Shell",
"period_type": "Standard Planning Period",
"period_name": "Standard Planning Period",
"period_by": "Month",
"period_format": "M YYYY",
"decimal_places": 8,
"decimal_option": "0"
"snapshot": {
    "snapshot_day_of": 1,
    "cutoff_spends": {
        "cutoff_week_num": "First",
        "cutoff_week_day": "Sunday",
        "inc_spends_opt": "next_month"
    }
},
"curves": [
    {
        "name": "Baseline",
        "type": "Baseline",
        "distribution": {
            "type": "auto_profile",
            "distribution_profile": "Front Loaded"
        },
        "cost": {
            "type": "auto_distribution"
        },
        "schedule": {
            "type": "schedule_sheet",
            "sheet_name": "sheet3",
            "sch_start_source": "Estimated Finish Date",
            "sch_end_source": "Estimated Start Date"
        }
    },
```

```
                {
                    "name": "Forecast",
                    "type": "Forecast",
                    "distribution": {
                        "type": "manual"
                    },
                    "cost": {
                        "type": "manual"
                    },
                    "schedule": {
                        "type": "schedule_sheet",
                        "sheet_name": "Sheet1",
                        "sch_start_source": "AP_Date6",
                        "sch_end_source": "AP_Date only 1"
                    },
                    "forecast_options": {
                        "begin_end_of_curve": true,
                        "fc_curve_name": "Actuals",
                        "current_actual_cut_off_date": true,
                        "edit_until_replace_by_actual": true
                    }
                },
                {
                    "name": "Actuals",
                    "type": "Spends",
                    "cost": {
                        "cost_sheet_column": "Purchase Orders
(Pending)",
                        "type": "cost_sheet"
                    }
                },
                {
                    "name": "Original Budget",
                    "type": "Portfolio Budget",
```

```
            "cost": {
                "currency_code": "United States Dollar (USD)",
                "distribut_amount_from": "original"
            }
        },
        {
            "name": "Approved Budget",
            "type": "Portfolio Budget",
            "cost": {
                "currency_code": "RADO",
                "distribut_amount_from": "approved"
            }
        },
        {
            "name": "Shared Budget",
            "type": "Portfolio Budget",
            "cost": {
                "currency_code": "Afghani (AFN)",
                "distribut_amount_from": "shared"
            }
        },
        {
            "name": "custom_D",
            "type": "Derived",
            "cost": {
                "base_currency": "United States Dollar (USD)",
                "source_curve_name": "Baseline",
                "derived_curve_currency": "Afghani (AFN)",
                "exchange_rate": "Float",
                "float_rate_as": "end_period"
            }
        }
    ],
    "filters": {
```

```
                "filter_option": "all"
            },
            "schedule":{
                "enable_refresh" : true,
                "frequency" : "Quarterly",
                "quarterday" : 4,
                "startdate": "2019/03/30",
                "noenddate": false,
                "enddate"    : "2020/03/30"
            },
            "summary_curves":[
                {
                    "name":"curve_1",
                    "summary_type" : "System Defined",
                    "status" : "Active"
                },
                {
                    "name":"curve_2",
                    "summary_type" : "System Defined",
                    "status" : "Active"
                }
            ]
         }
    ],
    "message": [
        "success"
    ],
    "status": 200
}
```


CBS


```
{
    "data": [
        {
```

```
            "name": "CBS_CF",
            "description": "CBS  Cashflow",
            "rollup_status": "Active",
            "detail_level": "CBS",
            "period_type": "Standard Planning Period",
            "period_name": "Standard Planning Period",
            "period_by": "Year",
            "period_format": "YYYY",
            "decimal_places": 3,
            "snapshot": {
                "snapshot_week_num": 1,
                "snapshot_week_day": "1"
            },
            "curves": [
                {
                    "name": "Actuals",
                    "type": "Spends",
                    "cost": {
                        "cost_sheet_column": "Purchase Orders
(Pending)",
                        "type": "cost_sheet"
                    }
                },
                {
                    "name": "Baseline",
                    "type": "Baseline",
                    "distribution": {
                        "type": "auto_profile",
                        "cbs": [
                            {
                                "cbs_code": "s1-a 1-b 1-a123~~s3-a 2-b
1-a123",
                                "bitemid": 13,
                                "item": "A123",
```

```
                                "default_profile": "Front Loaded"
                            },
                            {
                                "cbs_code": "s1-a 1-b 1-a123~~s2-a 2-b
1-a123",
                                "bitemid": 12,
                                "item": "A123",
                                "default_profile": null
                            }
                        ]
                    },
                    "cost": {
                        "type": "auto_distribution"
                    },
                    "schedule": {
                        "type": "schedule_sheet",
                        "sheet_name": "Sheet1",
                        "sch_start_source": "Finish date",
                        "sch_end_source": "Late Start date"
                    }
                },
                {
                    "name": "Forecast",
                    "type": "Forecast",
                    "distribution": {
                        "type": "schedule_sheet",
                        "sch_sheet_name": "sheet2"
                    },
                    "cost": {
                        "type": "manual"
                    },
                    "schedule": {
                        "type": "manual"
                    },
```

```
                    "forecast_options": {
                        "begin_end_of_curve": true,
                        "fc_curve_name": "Actuals",
                        "current_actual_cut_off_date": true,
                        "fc_dist": "weighted_avg_over_next",
                        "periods": 1
                    }
                },
                {
                    "name": "Portfolio Budget",
                    "type": "Portfolio Budget",
                    "cost": {
                        "currency_code": "Costa Rica Colon (CRC)",
                        "distribut_amount_from": "original"
                    }
                },
                {
                    "name": "custom_D",
                    "type": "Derived",
                    "cost": {
                        "base_currency": "United States Dollar (USD)",
                        "source_curve_name": "Actuals",
                        "derived_curve_currency": "Bhutan Ngultrum
(BTN)",
                        "exchange_rate": "Float",
                        "float_rate_as": "weighted_period"
                    }
                },
                {
                    "name": "Approved Budget",
                    "type": "Portfolio Budget",
                    "cost": {
                        "currency_code": "Bhutan Ngultrum (BTN)",
                        "distribut_amount_from": "approved"
```

```
        }
    },
    {
        "name": "Original Budget",
        "type": "Portfolio Budget",
        "cost": {
            "currency_code": "RADO",
            "distribut_amount_from": "original"
        }
    },
    {
        "name": "Shared Budget",
        "type": "Portfolio Budget",
        "cost": {
            "currency_code": "RADO",
            "distribut_amount_from": "shared"
        }
    },
    {
        "name": "Derive",
        "type": "Derived",
        "cost": {
            "base_currency": "United States Dollar (USD)",
            "source_curve_name": "Forecast",
            "derived_curve_currency": "Dirham (AED)",
            "exchange_rate": "Float",
            "float_rate_as": "beginning_period"
        }
    },
    {
        "name": "Forecast 2",
        "type": "Forecast",
        "distribution": {
            "type": "manual"
```

```
            },
            "cost": {
                "type": "manual"
            },
            "schedule": {
                "type": "p6_sheet",
                "p6_datasource": "Original Baseline",
                "sch_dates_type": "At Completion"
            },
            "forecast_options": {}
        }
    ],
    "filters": {
        "filter_option": "all"
    },
    "schedule":{
        "enable_refresh" : true,
        "frequency" : "Quarterly",
        "quarterday" : 4,
        "startdate": "2019/03/30",
        "noenddate": false,
        "enddate"    : "2020/03/30"
    },
    "summary_curves":[
        {
            "name":"curve_1",
            "summary_type" : "System Defined",
            "status" : "Active"
        },
        {
            "name":"curve_2",
            "summary_type" : "System Defined",
            "status" : "Active"
        }
```

```
            ]
         }
    ],
    "message": [
        "success"
    ],
    "status": 200
}
```


Summary CBS


```
{
    "data": [
        {
            "name": "SummaryCBS_CF",
            "description": "SummaryCBS_CF for Cashflow Properties",
            "rollup_status": "Active",
            "detail_level": "Summary CBS",
            "period_type": "Standard Planning Period",
            "period_name": "Standard Planning Period",
            "period_by": "Month",
            "period_format": "M YYYY",
            "decimal_places": 3,
            "snapshot": {
                "snapshot_week_num": 1,
                "snapshot_week_day": "2",
                "cutoff_spends": {
                    "cutoff_week_num": 2,
                    "cutoff_week_day": "6",
                    "inc_spends_opt": "next_month"
                }
            },
            "curves": [
                {
                    "name": "Actuals",
```

```
                    "type": "Spends",
                    "cost": {
                        "cost_sheet_column": "Purchase Orders
(Pending)",
                        "type": "cost_sheet"
                    }
                },
                {
                    "name": "Baseline",
                    "type": "Baseline",
                    "distribution": {
                        "type": "auto_profile"
                    },
                    "cost": {
                        "type": "cost_sheet",
                        "cost_sheet_column": "Purchase Orders (Pending)"
                    },
                    "schedule": {
                        "type": "schedule_sheet",
                        "sheet_name": "Sheet1",
                        "sch_start_source": "Start date",
                        "sch_end_source": "Finish date"
                    }
                },
                {
                    "name": "Forecast",
                    "type": "Forecast",
                    "distribution": {
                        "type": "manual"
                    },
                    "cost": {
                        "type": "manual"
                    },
                    "schedule": {
```

```
            "type": "manual"
        },
        "forecast_options": {}
    },
    {
        "name": "Approved Budget",
        "type": "Portfolio Budget",
        "cost": {
            "currency_code": "test",
            "distribut_amount_from": "approved"
        }
    },
    {
        "name": "Original Budget",
        "type": "Portfolio Budget",
        "cost": {
            "currency_code": "Yen (JPY)",
            "distribut_amount_from": "original"
        }
    },
    {
        "name": "Shared Budget",
        "type": "Portfolio Budget",
        "cost": {
            "currency_code": "Algeria Dinar (DZD)",
            "distribut_amount_from": "shared"
        }
    },
    {
        "name": "Derive",
        "type": "Derived",
        "cost": {
            "base_currency": "United States Dollar (USD)",
            "source_curve_name": "Baseline",
```

```
                        "derived_curve_currency": "Bhutan Ngultrum
(BTN)",
                        "exchange_rate": "Float",
                        "float_rate_as": "beginning_period"
                    }
                }
            ],
            "filters": {
                "filter_option": "all"
            },
            "schedule":{
                "enable_refresh" : true,
                "frequency" : "Quarterly",
                "quarterday" : 4,
                "startdate": "2019/03/30",
                "noenddate": false,
                "enddate"    : "2020/03/30"
            },
            "summary_curves":[
                {
                    "name":"curve_1",
                    "summary_type" : "System Defined",
                    "status" : "Active"
                },
                {
                    "name":"curve_2",
                    "summary_type" : "System Defined",
                    "status" : "Active"
                }
            ]
        }
    ],
    "message": [
        "success"
```

```
    ],
    "status": 200
}
```


Commitment Type


```
{
    "data": [
        {
            "name": "Commitment_CF",
            "description": "commit",
            "rollup_status": "Active",
            "detail_level": "Commitment",
            "bp_name": "Purchase Orders",
            "reference_elements": "record_no:Record No.",
            "base_commit_record": "PO-0001",
            "period_type": "Standard Planning Period",
            "period_name": "Standard Planning Period",
            "period_by": "Month",
            "period_format": "M YYYY",
            "decimal_places": 2,
            "curves": [
                {
                    "name": "Actuals",
                    "type": "Spends",
                    "cashflow_granularity": "by_lineitem",
                    "cost": {
                        "spends_bp": [{"bp_name" :"A_Commit_01",
"status":"Approved"}]
                    }
                },
                {
                    "name": "Baseline",
                    "type": "Baseline",
                    "cashflow_granularity": "individual_record",
                    "distribution": {
```

```
                        "type": "auto_profile",
                        "commit_profile": "business_process",
                        "bp_dates_profile": "{ Purchase Orders:Creation
Date:Creation Date:Back Loaded }{ PO Amendments:Creation Date:Creation
Date:Linear }"},
"bp_dates_profile": [
                    {
                       "bp_name": "Purchase Orders",
                        "todate": "uuu_creation_date ",
                        "profile": "Front Loaded",
                        "fromdate": "ugenP6PlannedStartDOP"
                     }
                ],
                    "commit_change_processes": "{PO
Amendments:Approved}{PO Amendments:Canceled}{PO Amendments:Rejected}"
"commit_change_processes": [
                        {
                            "bp_name": "PO Amendments",
                            "status": "Approved"
                        },
                        {
                           "bp_name": "PO Amendments",
                            "status": "Canceled"
                        },
                        {
                            "bp_name": "PO Amendments",
                            "status": "Pending"
                        },
                        {
                            "bp_name": "PO Amendments",
                            "status": "Rejected"
                        }
                    ]
                },
```

```
{
    "name": "Forecast",
    "type": "Forecast",
    "cashflow_granularity": "by_lineitem",
    "distribution": {
        "type": "manual"
    },
    "commit_change_processes": "",
    "forecast_options": {}
},
{
    "name": "Approved Budget",
    "type": "Portfolio Budget",
    "cost": {
        "currency_code": "Costa Rica Colon (CRC)",
        "distribut_amount_from": "approved"
    }
},
{
    "name": "Shared Budget",
    "type": "Portfolio Budget",
    "cost": {
        "currency_code": "Dirham (AED)",
        "distribut_amount_from": "shared"
    }
},
{
    "name": "Original Budget",
    "type": "Portfolio Budget",
    "cost": {
        "currency_code": "Afghani (AFN)",
        "distribut_amount_from": "original"
    }
},
```

```
                {
                    "name": "Derive",
                    "type": "Derived",
                    "cost": {
                        "base_currency": "United States Dollar (USD)",
                        "source_curve_name": "Baseline",
                        "derived_curve_currency": "Costa Rica Colon
(CRC)",
                        "exchange_rate": "Float",
                        "float_rate_as": "weighted_period"
                    }
                }
            ],
            "schedule":{
                "enable_refresh" : true,
                "frequency" : "Quarterly",
                "quarterday" : 4,
                "startdate": "2019/03/30 00:00",
                "noenddate": false,
                "enddate": "2020/03/31 00:00"
            },
            "summary_curves":[
                {
                    "name":"curve_1",
                    "summary_type" : "System Defined",
                    "status" : "Active"
                },
                {
                    "name":"curve_2",
                    "summary_type" : "System Defined",
                    "status" : "Active"
                }
            ]
        }
```

```
    ],
    "message": [
        "success"
    ],
    "status": 200
}
{
    "data": [
        {
            "id": 670,
            "name": "P-0006",
            "description": null,
            "rollup_status": "Active",
            "detail_level": "Commitment",
            "bp_name": "Purchase Orders",
            "reference_elements": "record_no:record_no",
            "base_commit_record": "PO-0005",
            "period_type": "Financial Periods",
            "period_name": "FP_02",
            "period_by": "Custom",
            "decimal_places": 2,
            "schedule": {
                "enable_refresh": true,
                "frequency": "Quarterly",
                "quarterday": 4,
                "startdate": "06/24/2019",
                "noenddate": false,
                "enddate": "06/24/2020"
            },
            "curves": [
                {
                    "id": 930,
                    "name": "Forecast",
                    "type": "Forecast",
```

```
        "cashflow_granularity": "by_lineitem",
        "distribution": {
            "type": "manual"
        },
        "commit_change_processes": [],
        "forecast_options": {}
    },
    {
        "id": 931,
        "name": "Baseline",
        "type": "Baseline",
        "cashflow_granularity": "individual_record",
        "distribution": {
            "type": "auto_profile",
            "commit_profile": "business_process",
            "bp_dates_profile": [
                {
                    "bp_name": "Purchase Orders",
                    "todate": "uuu_creation_date",
                    "profile": "Back Loaded",
                    "fromdate": "ugenP6PlannedStartDOP"
                },
                {
                    "bp_name": "PO Amendments",
                    "todate": "ugenP6PlannedFinishDOP",
                    "profile": "Linear",
                    "fromdate": "due_date"
                }
            ]
        },
        "commit_change_processes": [
            {
                "bp_name": "PO Amendments",
                "status": "Approved"
```

```
            },
            {
                "bp_name": "PO Amendments",
                "status": "Pending"
            }
        ]
    },
    {
        "id": 957,
        "name": "Actuals",
        "type": "Spends",
        "cashflow_granularity": "by_lineitem",
        "cost": {
            "spends_bp": [
                {
                    "bp_name": "Invoices",
                    "status": "Approved"
                },
                {
                    "bp_name": "Invoices",
                    "status": "Pending"
                }
            ]
        }
    },
    {
        "id": 958,
        "name": "Approved Budget",
        "type": "Portfolio Budget",
        "cost": {
            "currency_code": "Belize Dollar (BZD)",
            "distribut_amount_from": "approved"
        }
    },
```

```
        {
            "id": 959,
            "name": "Shared Budget",
            "type": "Portfolio Budget",
            "cost": {
                "currency_code": "Indian Rupee (INR)",
                "distribut_amount_from": "shared"
            }
        },
        {
            "id": 960,
            "name": "Original Budget",
            "type": "Portfolio Budget",
            "cost": {
                "currency_code": "Malta Lira (MTL)",
                "distribut_amount_from": "original"
            }
        },
        {
            "id": 961,
            "name": "Derived",
            "type": "Derived",
            "cost": {
                "base_currency": "United States Dollar (USD)",
                "source_curve_name": "Baseline",
                "derived_curve_currency": "Belize Dollar (BZD)",
                "exchange_rate": "Float",
                "float_rate_as": "weighted_period"
            }
        }
    ],
    "summary": [
        {
            "name": "Cash Flow Summary Curve",
```

```
                    "summary_type": "System_Defined"
                }
            ]
        }
    ],
    "message": [
        "success"
    ],
    "status": 200
}
```

All possible Schedule values

```
"schedule":{
    "enable_refresh" : false
}
"schedule":{
    "enable_refresh" : true,
    "frequency" : "Daily",
    "startdate": "2019/03/30 00:00",
    "noenddate": true,
    "enddate": null
}
"schedule":{
    "enable_refresh" : true,
    "frequency" : "Weekly",
    "weekday"    : "Thursday",
    "startdate": "2019/03/30 00:00",
    "noenddate": false,
    "enddate": "2020/03/31 00:00"
}
"schedule":{
    "enable_refresh" : true,
    "frequency" : "Monthly",
    "bymonthday": true,
```

```
    "monthday": 11,
    "startdate": "2019/03/30 00:00",
    "noenddate": false,
    "enddate": "2020/03/31 00:00"
}
"schedule":{
    "enable_refresh" : true,
    "frequency" : "Monthly",
    "bymonthday": false,
    "monthweeknum"    : 2
    "monthweekday": "Thursday",
    "startdate": "2019/03/30 00:00",
    "noenddate": false,
    "enddate": "2020/03/31 00:00"
}
"schedule":{
    "enable_refresh" : true,
    "frequency" : "Quarterly",
    "quarterday" : 4,
    "startdate": "2019/03/30 00:00",
    "noenddate": false,
    "enddate": "2020/03/31 00:00"
}
```


Company Level


```
{
    "data": [
        {
            "name": "Company cashflow- roll up curves",
            "description": null,
            "status": "Active",
            "period_type": "Standard Planning Period",
            "period_name": "Standard Planning Period",
```

```
            "period_by": "Month",
            "period_format": "M YYYY",
            "decimal_places": 2,
            "filters": {
                "filter_option": "all"
            },

            "data_source": [
                {
                    "name": "Baseline",
                    "curve_type": "Baseline"
                },
                {
                    "name": "Forecast",
                    "curve_type": "Forecast"
                },
                {
                    "name": "Actuals",
                    "curve_type": "Spends"
                }
            ]
        }
    ],
    "message": [
        "success"
    ],
    "status": 200
}
```


Get Summary Cash Flow Properties

GET /ws/rest/service/v1/cashflow/summary/{project_number}

Purpose:

Get Summary Cash Flow properties

Input:

All parameters should be URL encoded.

Path Parameter

project_number(Mandatory): Specify the project/Shell number to get project cash flow properties

input query parameter -

filter=

```
{
 "names":["Summary Cash Flow 1" ,"Summary Cash Flow 2"]
 }
```

Filter can be used to filter on name to get the summary cash flow properties. If summary cashflow does not exist with the given name, then that name will be ignored.

Output:

JSON object containing 'status', 'data', 'message'

Status codes are:

1> 200, for success.

Get Summary Cashflow Properties

```
{
    "data": [
        {
            "curves": [
                "Cash Flow 1",
                "Cash flow 2"
            ],
            "name": "Sum Cash Flow 1",
            "description": "This summary curve is created from REST API",
            "summary_type": "User_Defined",
            "status": "Active"
        }
    ],
    "message": [
        "success"
    ],
    "status": 200
```

```
}
```

Get Cash Flow Permissions

GET /ws/rest/service/v1/cashflow/permission/{project_number}

Purpose:

Fetch Cash flow Permissions

The input JSON shall provide various options to be considered for fetching cash flow permissions.

POST body is a JSON

> **Note:** POST call has input & output both as JSON in the body

input query parameter

filter =

```
{
    "names" : [ "cash flow 1", "cash flow 2" ]
 }
```

Input:

All parameters should be URL encoded.

project_number: Specify the Project number in which the cash flow exists. If not provided, Company workspace will be considered.

In request, "names" is optional.

In the request body names can be provided in below two formats

1. "names": ["cash flow 1", "cash flow 2", "cash flow 3"] For one or more cash flows.
2. "names": "cash flow 1" For only one cash flow.

Output:

JSON object containing 'status', 'data', 'message'

message will be present if status is not 200; otherwise, it will be "success".

Get Cash flow Permission Sample Response

```
{
    "data": {
        "cash flow 1": {
           "permissions": [
                {
                    "login_name": "coadmin",
```

```
                "full_name": "Company Administrator",
                "permission": {
                    "edit_data": "1",
                    "view": "1",
                    "modify_permission": "0"
                },
                "type": "U"
            },
            {
                "full_name": "Company Group 1",
                "group_name": "Company Group 1",
                "permission": {
                    "edit_data": "1",
                    "view": "1",
                    "modify_permission": "1"
                },
                "type": "CG"
            }
        ]
    },
    "Cash flow 2": {
        "permissions": [
            {
                "login_name": "firstname",
                "full_name": "Firstname Lastname",
                "permission": {
                    "edit_data": "1",
                    "view": "1",
                    "modify_permission": "1"
                },
                "type": "U"
            }
        ]
    }
```

```
    },
    "message": [
        "success"
    ],
    "status": 200
}
```

Get Distribution Profiles

GET /ws/rest/service/v1/cashflow/profile

Purpose:

Get Distribution profiles of company

Input:

All parameters should be URL encoded.

Path Parameter

url parameter(Optional)

filter=

```
{
 "names":["Linear" , "L Curve"]
 }
```

Filter can be used to filter on profile name to get the distribution profile data. If profile does not exist with the given name, then that name will be ignored. Profiles of other names will be returned.

Output:

JSON object containing 'status', 'data', 'message'

Get Distribution Profile Output JSON

```
{
    "data": [
        {
            "name": "Linear",
            "status": "Active",
            "distribution": [
                "5.0",
                "5.0",
                "5.0",
```

```
                "5.0",
                "5.0",
                "5.0",
                "5.0",
                "5.0",
                "5.0",
                "5.0",
                "5.0",
                "5.0",
                "5.0",
                "5.0",
                "5.0",
                "5.0",
                "5.0",
                "5.0",
                "5.0"
            ]
        }
    ],
    "message": [
        "success"
    ],
    "status": 200
}
```


Status codes are:

1> 200, for success.

Create (Add User or Group) Cash Flow Permission

POST /ws/rest/service/v1/cashflow/permission/{project_number}

Purpose:

Add User or Group to cash flow permission (in user mode) of a specific BP in a shell based on shell number or from Company level if project/shell number is not provided.

The input JSON shall provide various options to be considered for fetching the data

Input:

All parameters should be URL encoded.

Path Parameter

project_number: Specify the Project number in which the cash flow exists, if not provided, then cash flows are considered to be fetched from Company level.

POST body is a JSON

> **Note:** POST call has input & output both as JSON in the body

Input JSON

```
{
    "data" :
    {
        "names": ["cash flow 1"] ,
        "permissions": [
                {
                    "login_name": "PU1",
                    "type": "U",
                    "full_name": "P1 user",
                    "permission": {
                        "edit_data": "1",
                        "modify_permission": "1",
                        "view": "1"
                    }
                }
            ]
    }
}
```

Here "cash_flow" are mandatory in options.

In the request body names can be provided in below two formats

1. "names": ["cash flow 1", "cash flow 2", "cash flow 3"] For one or more cash flows.
2. "names": "cash flow 1" For only one cash flow.

If names not provided, then error response will be provided to user to provide cash flows .

Output:

JSON object containing 'status', 'data', 'message'

message will be present if status is not 200; otherwise, it will be "success".

Create (Add User/Group) Cash flow Permission Sample Response

1) Response for success case:


```
{
    "data": {
        "cash flow 1": {
            "added_users": [PU1],
            "permissions": [
                {
                    "login_name": "PU1",
                    "full_name": "PU1 P",
                    "permission": {
                        "edit_data": "1",
                        "view": "1",
                        "modify_permission": "1"
                    },
                    "type": "U"
                },
                {
                    "login_name": "coadmin",
                    "full_name": "Company Administrator",
                    "permission": {
                        "edit_data": "1",
                        "view": "1",
                        "modify_permission": "1"
                    },
                    "type": "U"
                },
                {
                    "full_name": "Space Planners",
                    "group_name": "Space Planners",
                    "permission": {
                        "edit_data": "1",
                        "view": "1",
                        "modify_permission": "1"
```

```
                    },
                    "type": "CG"
                }
            ],
            "added_groups": []
        }
    },
    "message": [
        "success"
    ],
    "status": 200
}
```


2) Response for partial success case:


```
{
    "data": {
        "cash flow 1": {
            "permissions": [
                {
                    "login_name": "donna",
                    "full_name": "Donna Pinciotti",
                    "permission": {
                        "edit_data": "1",
                        "view": "1",
                        "modify_permission": "1"
                    },
                    "type": "U"
                },
                {
                    "full_name": "Project Managers",
                    "group_name": "Project Managers",
                    "permission": {
                        "edit_data": "1",
                        "view": "1",
```

```
                        "modify_permission": "0"
                    },
                    "type": "PG"
                }
            ],
            "added_users": [
                "donna"
            ],
            "added_groups": [
                "Project Managers"
            ]
        }
    },
    "message": [
        {
            "name": "cash flow 2",
            "status": "add permission error message"
        },
        {
            "name": "cash flow 3",
            "status": "add permission error message"
        }
    ],
    "status": 3000
}
```


Delete (Remove User or Group) Cash Flow Permission

DELETE /ws/rest/service/v1/cashflow/permission/{project_number}

Purpose:

Add User/Group to cash flow permission (in user mode) of a specific BP in a shell based on shell number or from Company level if project/shell number is not provided.

The input JSON shall provide various options to be considered for fetching the data

Input:

All parameters should be URL encoded.

Path Parameter

project_number: Specify the Project number in which the cash flow exists, if not provided, then cash flows are considered to be fetched from Company level.

POST body is a JSON

> **Note:** POST call has input & output both as JSON in the body

Input JSON

```
{
    "data" :
    {
        "names": ["cash flow 1"],
        "user_names" : ["coadmin","donna","PU1"],
        "group_names" : [ "group1", "group2" ]
    }
}
```

Here "cash_flow" are mandatory in options.

In the request body names can be provided in below two formats

1. "names": ["cash flow 1", "cash flow 2", "cash flow 3"] For one or more cash flows.
2. "names": "cash flow 1" For only one cash flow.

If names not provided, then error response will be provided to user to provide cash flows .

Output:

JSON object containing 'status', 'data', 'message'

message will be present if status is not 200; otherwise, it will be "success".

Delete (Remove User/Group) Cash flow Permission Sample Response

1) Response for success case:

```
{
    "data": {
        "cash flow 1": {
            "deleted_groups": [],
            "deleted_users": [
                "PU1 P"
            ]
        }
    },
    "message": [
```

```
        "success"
    ],
    "status": 200
}
```


2) Response for partial success case:


```
{
    "data": {
        "cash flow 1": {
            "deleted_groups": [],
            "deleted_users": [
                "PU1 P"
            ]
        }
    },
    "message": [
        {
            "name": "cash flow 2",
            "status": "delete permission error message"
        },
        {
            "name": "cash flow 3",
            "status": "delete permission error message"
        }
    ],
    "status": 3000
}
```


Update Cash Flow

PUT /ws/rest/service/v1/cashflow/{project_number}

Purpose:

Update cash flow properties data. Can be used to add new curves to cash flow.

Input:

All parameters should be URL encoded.

Specify only the data that needs to be updated. Use the response from get cash flow properties service "GET /ws/rest/service/v1/cashflow/{project_number}" to create the update request.

Cashflow curves will be updated based on the cash flow id.

If the attribute is not provided, then the value will not be updated.

If the attribute is provided with value, then validation will be performed and the value will be updated.

When the attribute is provided and the value is empty, then the value will be deleted.

To delete a profile from profile list of CBS or Summary CBS, provide empty default profile, as below.

Irrelevant attributes specified in the request for create/update are ignored.

Deletion of Profile

```
"distribution": {
                    "type": "auto_profile",
                    "cbs": [
                            {
                                 "cbs_code": "t30001~~t30002",
                                 "bitemid": 242,
                                 "item": "T30002",
                                 "default_profile": ""
                             }
                        ]
                   }
```

To delete a change commit BP list, specify "action" attribute with value as "delete", as given below:

Deletion of Commit BP

```
"commit_change_processes": [
                        {
                            "bp_name": "PO Amendments",
                            "status": "Canceled",
                            "action":"delete"
                        }
                     ]
```

To update Distribution profiles in Commitment detail level Cashflow, All values of "that profile map" must be provided . Other maps (or rows in UI) of bp_date_profiles which are not subject to update, are optional (may or may not be in bp_date_profiles list).

```
"bp_dates_profile": [
                        {
                            "bp_name": "PO Amendments",
                            "todate": "ugenP6PlannedFinishDOP",
                            "profile": "Back Loaded",
                            "fromdate": "due_date"
                        }
                    ]
```

To delete Distribution profile in Commitment Detail level Cashflow, provide correct "bp_name" and "to_date", "fromdate" & "profile" as empty String, in "bp_dates_profiles.

```
"bp_dates_profile": [
                        {
                            "bp_name": "PO Amendments",
                            "todate": "",
                            "profile": "",
                            "fromdate": ""
                        }
                    ]
```

Note: POST call has input & output both as JSON in the body.

Update Cashflow Manual - Project or Shell

```
{
    "data":
        {   "id":12,
            "name": "project type cashflowupdated",
            "description": null,
            "rollup_status": "Active",
            "detail_level": "Project / Shell",
            "period_type": "Standard Planning Period",
            "period_name": "Standard Planning Period",
            "period_by": "Month",
            "period_format": "M YYYY",
            "decimal_places": 2,
            "decimal_option": "0"
```

```
            "snapshot": {
                "sn_week_num": "First",
                "sn_week_day": "Sunday",
                "cutoff_spends": {
                    "cutoff_week_num": "First",
                    "cutoff_week_day": "Sunday",
                    "inc_spends_opt": "same_month"
                }
            },
            "schedule": {
                "enable_refresh": false
            },

            "summary": [
                {
                    "name": "summary",
                    "summary_type": "User_Defined"
                }
            ],
            "curves": [
                {
                    "name": "Actuals",
                    "type": "Spends",
                    "cost": {
                        "type":"cost_sheet",
                        "cost_sheet_column": "152 Base Commit WF
(Approved)"
                    }
                },
                {
                    "name": "Cash flow3",
                    "type": "Derived",
                    "cost": {
                        "base_currency": "United States Dollar (USD)",
```

```
                        "source_curve_name": "Actuals",
                        "derived_curve_currency": "Australia Dollar
(AUD)",
                        "exchange_rate": "Peg",
                        "peg_rate_as": "Dynamic",
                        "peg_dynamic_ds": "Single Record BPs / 922_Simple
PNW/FSingle LL",
                        "peg_dynamic_de": "Currency amount 1",
                        "float_rate_as": "weighted_period"
                    }
                },
                {
                    "name": "Today",
                    "type": "Portfolio Budget",
                    "cost": {
                        "currency_code": "Australia Dollar (AUD)",
                        "distribut_amount_from": "approved"
                    }
                },
                {
                    "name": "Forecast",
                    "type": "Forecast",
                    "distribution": {
                        "type": "auto_profile",
                        "distribution_profile": "Front Load"
                    },
                    "cost": {
                        "type": "cost_sheet",
                        "cost_sheet_column": "152 Base Commit WF (Open)"
                    },
                    "schedule": {
                        "type": "manual"
                    },
                    "forecast_options": {
```

```
                        "begin_end_of_curve": true,
                        "fc_curve_name": "Actuals",
                        "current_actual_cut_off_date": true,
                        "fc_dist": "weighted_avg_over_next",
                        "periods": 3
                    }
                }
            ]
        }

}
```

For other detail_type sample output, please refer to create Cashflow call.

Output:

JSON object containing 'status', 'data', 'message'

a message will be present if the status is not 200; otherwise, it will be "success".

Update or Modify Cash Flow Permission

PUT /ws/rest/service/v1/cashflow/permission/{project_number}

Purpose:

Update permission (in user mode) of a specific cash flow in a shell based on shell number or from Company level if project/shell number is not provided.

The input JSON shall provide various options to be considered for fetching the data

Input:

All parameters should be URL encoded.

Path Parameter

project_number: Specify the Project number in which the cash flow exists; if not provided, then cash flows are considered to be fetched from Company Level.

POST body is a JSON

> **Note:** POST call has input & output both as JSON in the body

Input JSON

```
{
    "data" :
    {
        "names": ["cash flow 1", "cash flow 2", "cash flow 3"] ,
```

```
            "permissions": [
                    {
                        "login_name": "coadmin",
                        "type": "U",
                        "full_name": "Company Administrator",
                        "permission": {
                            "edit_data": "1",
                            "modify_permission": "0",
                            "view": "1"
                        }
                    },
                    {
                        "full_name": "Project Manager 1",
                        "group_name": "Project Manager 1",
                        "permission": {
                            "edit_data": "1",
                            "view": "1",
                            "modify_permission": "0"
                        },
                        "type": "PG"
                    }
                ]
        }
    }
```

In request, "names" is mandatory .

In the request body names can be provided in below two formats

1. "names": ["cash flow 1", "cash flow 2", "cash flow 3"] For one or more cash flows.
2. "names": "cash flow 1" For only one cash flow.

If names not provided, then error response will be provided to user to provide cash flows.

Output:

JSON object containing 'status', 'data', 'message'

message will be present if status is not 200; otherwise, it will be "success".

Update or Modify Cash flow Permission Sample Response

1) Response for success case:

```
{
    "data": {
        "cash flow 1": {
```

```
"permissions": [
    {
        "login_name": "donna",
        "full_name": "Donna Pinciotti",
        "permission": {
            "edit_data": "1",
            "view": "1",
            "modify_permission": "1"
        },
        "type": "U"
    },
    {
        "login_name": "coadmin",
        "full_name": "Company Administrator",
        "permission": {
            "edit_data": "1",
            "view": "1",
            "modify_permission": "0"
        },
        "type": "U"
    },
    {
        "full_name": "Project Managers",
        "group_name": "Project Managers",
        "permission": {
            "edit_data": "1",
            "view": "1",
            "modify_permission": "0"
        },
        "type": "PG"
    }
],
"updated_users": [
    "coadmin"
```

```
        ],
        "updated_groups": [
            "Project Managers"
        ]
    },
    "cash flow 2": {
        "permissions": [
            {
                "login_name": "coadmin",
                "full_name": "Company Administrator",
                "permission": {
                    "edit_data": "1",
                    "view": "1",
                    "modify_permission": "1"
                },
                "type": "U"
            }
        ],
        "updated_users": [],
        "updated_groups": []
    },
    "cash flow 3": {
        "permissions": [
            {
                "login_name": "coadmin",
                "full_name": "Company Administrator",
                "permission": {
                    "edit_data": "1",
                    "view": "1",
                    "modify_permission": "0"
                },
                "type": "U"
            },
            {
```

```
                    "login_name": "donna",
                    "full_name": "Donna Pinciotti",
                    "permission": {
                        "edit_data": "1",
                        "view": "1",
                        "modify_permission": "1"
                    },
                    "type": "U"
                },
                {
                    "full_name": "Project Managers",
                    "group_name": "Project Managers",
                    "permission": {
                        "edit_data": "1",
                        "view": "1",
                        "modify_permission": "0"
                    },
                    "type": "PG"
                }
            ],
            "updated_users": [
                "coadmin"
            ],
            "updated_groups": [
                "Project Managers"
            ]
        }
    },
    "message": [
        "success"
    ],
    "status": 200
}
```

2: Response for partial success case:


```
{
    "data": {
        "cash flow 1": {
            "permissions": [
                {
                    "login_name": "donna",
                    "full_name": "Donna Pinciotti",
                    "permission": {
                        "edit_data": "1",
                        "view": "1",
                        "modify_permission": "1"
                    },
                    "type": "U"
                },
                {
                    "login_name": "coadmin",
                    "full_name": "Company Administrator",
                    "permission": {
                        "edit_data": "1",
                        "view": "1",
                        "modify_permission": "0"
                    },
                    "type": "U"
                },
                {
                    "full_name": "Project Managers",
                    "group_name": "Project Managers",
                    "permission": {
                        "edit_data": "1",
                        "view": "1",
                        "modify_permission": "0"
                    },
```

```
                    "type": "PG"
                }
            ],
            "updated_users": [
                "coadmin"
            ],
            "updated_groups": [
                "Project Managers"
            ]
        }
    },
    "message": [
        {
            "name": "cash flow 2",
            "status": "update permission error message"
        },
        {
            "name": "cash flow 3",
            "status": "update permission error message"
        }
    ],
    "status": 3000
}
```


Update Cash Flow Data

PUT /ws/rest/service/v1/cashflow/data/{project_number}

Purpose:

This service will update the cash flow detail curve data.

Input:

All parameters should be URL encoded.

Path Parameter

project_number(Required): Specify the project/shell number.

PUT body is in JSON format.

"options": Specify if curve "setup" or "distribution" data has to be updated. If no data is provided, then the default will be setup = "yes".

"setup": Optional, default is "yes". Specify "yes" if you need to update the curve setup data (From Date, To Date, Profile and Total), "no" if curve setup is not required to be updated.

"distribution": Optional, default is "no". Specify "yes" if you need to update the distribution data (distribution values of the Total amount entered in the date period), "no" if the distribution is not required to be updated.

If both setup and distribution are set to "yes" then only "setup" data will be updated.

if both setup and distribution are set to "no" then no data will be updated.

"data": Specify the curve data which needs to be updated. Use the response from the REST API, "/cashflow/data". Use the "details" part of the response.

The "From Date" and "To Date" should use integration user preference data format.

Sample Request

```
{
   "options":{
      "setup":"yes",
      "distribution":"no"
   },
   "data":[
      {
         "Name":"cashflow 1",
         "curves":[
            {
               "Type":"Forecast",
               "Name":"Forecast",
               "details":[
                  {
                     "Number":"TestProj-C",
                     "Name":"TestProj-C-TestProj-C Name",
                     "From Date":"05-31-2019 00:00:00",
                     "To Date":"10-25-2019 00:00:00",
                     "Profile":"",
                     "Total":"230.00",
                     "Unassigned":"-48.00",
                     "5 2019":"450.00",
```

```
                  "6 2019":"40.00",
                  "7 2019":"10.00",
                  "8 2019":"-44.00",
                  "9 2019":"-44.00",
                  "10 2019":"-44.00"
               }
            ]
         },
         {
            "Type":"Baseline",
            "Name":"Baseline",
            "details":[
               {
                  "Number":"TestProj-C",
                  "Name":"TestProj-C-TestProj-C Name",
                  "From Date":"05-01-2019 00:00:00",
                  "To Date":"10-25-2019 00:00:00",
                  "Profile":"",
                  "Total":"100.00",
                  "Unassigned":"90.00",
                  "5 2019":"5.00",
                  "6 2019":"0.00",
                  "7 2019":"0.00",
                  "8 2019":"0.00",
                  "9 2019":"10.00",
                  "10 2019":"0.00"
               }
            ]
         }
      ]
   }
]
}
```

Output:

JSON object containing 'status', 'data', 'message'

a message will be present if the status is not 200; otherwise, it will be "success".

Update Data Response

```
{
    "data": [],
    "message": [
        {
            "curve_name": "Baseline",
            "status_code": 200,
"name": "cashflow 1"
            "message": "success"
        }
    ],
    "status": 200
}
```

Update Cash Flow Schedule

PUT /ws/rest/service/v1/cashflow/schedule/{project_number}

Version: 19.7

Purpose:

Update cashflow schedule details.

Input:

All parameters should be URL encoded.

Specify only the schedule data that needs to be updated. Use the response from get cashflow properties service "GET /ws/rest/service/v1/cashflow/{project_number}" to get schedule data.

If the attribute is not provided, then the value will not be updated.

If the attribute is provided with value, then validation will be performed and the value will be updated.

When the attribute is provided and the value is empty, then the value will be deleted.

Irrelevant attributes specified in the request for update are ignored.

Update Cashflow Schedule

```
{
```

```
    "data":{

            "id":198,
            "name": "test7521",
             "schedule": {
                "enable_refresh": true,
                "frequency": "Weekly",
                "weekday": "Sunday",
                "startdate": "06/16/2019 12:00 AM",
                "noenddate": false,
                "enddate": "06/24/2019 12:00 AM"
            }
       }
}
```

Note: POST call has input & output both as JSON in the body.

For other detail_type sample output, please refer to create/Update Cashflow call.

Output:

JSON object containing 'status', 'data', 'message'

a message will be present if the status is not 200; otherwise, it will be "success".

Create Distribution Profiles

POST /ws/rest/service/v1/cashflow/profile

Purpose:

Create distribution profiles of company

Input:

Both input & output in JSON format in the body.

Create Distribution Profile input JSON

```
{
    "data": [
        {
            "name": "S Curve new",
            "status": "Active",
            "distribution": [
```

```
            "0.5",
            "0.5",
            "1.5",
            "1.5",
            "4.0",
            "4.0",
            "7.5",
            "7.5",
            "11.5",
            "11.5",
            "11.5",
            "11.5",
            "7.5",
            "7.5",
            "4.0",
            "4.0",
            "1.5",
            "1.5",
            "0.5",
            "0.5"
        ]
    },
    {
        "name": "Front Loaded",
        "status": "Active",
        "distribution": [
            "6.5",
            "6.5",
            "6.5",
            "6.5",
            "6.5",
            "6.5",
            "6.5",
            "6.5",
```

```
                "6.5",
                "6.5",
                "3.5",
                "3.5",
                "3.5",
                "3.5",
                "3.5",
                "3.5",
                "3.5",
                "3.5",
                "3.5",
                "3.5"
            ]
        }
    ]
}
```

Supported values for "status" is "Active" or "Inactive".

The "distribution" must be a list of at least 20 elements, the sum of them all must be 100. If the "distribution" is not provided, the "distribution" with 20 elements, all with value 5, will be considered.

Output:

JSON object containing 'status', 'data', 'message'

Create Distribution Profile output JSON

```
{
    "data": [
            {
                "id": 5,
                "name": "S Curve new"
            }
     ],
    "message": [
           {
                "name": "S Curve new",
                "status": 200,
```

```
                "message": "success"
            },
            {
                "name": "Front Loaded",
                "status": 1337,
                "message": "Distribution Profile already exist"
            }
    ],
    "status": 3000
}
```


Status codes are:

1> 200, for success.

2> 3000, for Partial success.

Update Distribution Profiles

PUT /ws/rest/service/v1/cashflow/profile

Purpose:

Update the distribution profiles of company.

Input:

Both input & output in JSON format in the body.

Update Distribution Profile input JSON


```
{
    "data": [
        {
            "id": 1,
            "name": "S Curve new",
            "status": "Active",
            "distribution": [
                "0.5",
                "0.5",
                "1.5",
                "1.5",
                "4.0",
```

```
            "4.0",
            "7.5",
            "7.5",
            "11.5",
            "11.5",
            "11.5",
            "11.5",
            "7.5",
            "7.5",
            "4.0",
            "4.0",
            "1.5",
            "1.5",
            "0.5",
            "0.5"
        ]
    },
    {
        "id": 2,
        "name": "Front Loaded",
        "status": "Active",
        "distribution": [
            "6.5",
            "6.5",
            "6.5",
            "6.5",
            "6.5",
            "6.5",
            "6.5",
            "6.5",
            "6.5",
            "6.5",
            "3.5",
            "3.5",
```

```
                "3.5",
                "3.5",
                "3.5",
                "3.5",
                "3.5",
                "3.5",
                "3.5",
                "3.5"
            ]
        }
    ]
}
```

Supported values for "status" is "Active" or "Inactive".

The "distribution" must be a list of at least 20 elements, the sum of them all must be 100.

Output:

JSON object containing 'status', 'data', 'message'

Update Distribution Profile output JSON

```
{
    "data": [],
    "message": [
        {
            "id" : 1,
            "name": "S Curve new"
            "status": 200,
            "message": "success"
        },
        {
            "id" : 2,
            "name": "Front Loaded"
            "status": 200,
            "message": "success"
        }
    ],
```

```
    "status": 200
}
```

Status codes are:

1> 200, for success.

2> 3000, for Partial success.

Delete Distribution Profiles

DELETE /ws/rest/service/v1/cashflow/profile

Purpose:

Delete distribution profiles of company

Input:

Both input & output in JSON format in the body

Delete Distribution Profile input JSON

```
{
    "data": {
        "names": ["Linear", "L Curve", "S Curve"]
    }
}
```

Output:

JSON object containing 'status', 'data', 'message'

Delete Distribution Profile Output JSON

```
{
    "data": [],
    "message": [
        {
            "name": "Linear"
            "status": 200,
            "message": "success"
        },
        {
            "name": "L Curve"
            "status": 1337,
            "message": "Distribution Profile do not exist"
```

```
        },
        {
            "name": "S Curve"
            "status": 1338,
            "message": "Distribution Profile is used in Cashflow Curves"
        }
    ],
    "status": 3000
}
```

Status codes are:

1> 200, for success.

2> 3000, for Partial success.

Refresh Cash Flow Curves

POST /ws/rest/service/v1/cashflow/prop/refresh/{project_number}

Purpose:

Refresh selected cash flow properties.

The input JSON shall provide various options to be considered for refreshing Curves.

Input:

All parameters should be URL encoded.

project_number: (Required) Specify the Project number in which the curve exists.

POST body is a JSON

> **Note**: POST call has input & output both as JSON in the body.

```
{
"options":{
"property_name": "CBS CF"
}
}
```

Supported options properties

"property_name": "CBS CF"

"rollup_status"<<Active><Inactive>>

If rollup_status value provided is other than above mentioned values, invalid options message will be thrown.

"detail_level"<<Summary CBS>< CBS><Project / Shell><Commitment>>

If detail_levelvalue provided is other than above mentioned values, invalid options message will be thrown.

"include_curves":<< Yes/ No>> <!-- default is Yes if not provided→>

If include_curves value provided is other than above mentioned values, invalid options message will be thrown.

Output:

JSON object containing 'status', 'data', 'message'

A message will be present if the status is not 200; otherwise, it will be "success".

Refresh Cash Flow Sample


```
{
    "data": [
        {
            "id": 13,
            "name": "Project CF",
            "_record_status": "SUCCESS"
        },
        {
            "id": 14,
            "name": "Project CF FP",
            "_record_status": "SUCCESS"
        },
        {
            "id": 15,
            "name": "xyz",
            "_record_status": "SUCCESS"
        }
    ],
    "message": [
        "success"
    ],
    "status": 200
}
```

Get Cash Flow Permissions

GET /ws/rest/service/v1/cashflow/prop/permission/{project_number}

Purpose:

Fetch Cash flow Permissions

The input JSON shall provide various options to be considered for fetching cashflow permissions.

Input:

All parameters should be URL encoded.

project_number: (Required) Specify the Project number in which the curve exists.

Output:

JSON object containing 'status', 'data', 'message'

A message will be present if the status is not 200; otherwise, it will be "success".

Refresh Cash Flow


```
"data":
 [
   {
     "property_name":"Project CF",
     "user_group":
     [
       {
         "name":"Admin",
         "type":"U",
         "id":1000,
         "permission":
         {
           "modify_permission":1,
           "edit_data":1,
           "view":1
         }
       },
       {
         "name":"test Group",
```

```
          "type":"PU",
          "id":1000014,
          "permission":
          {
            "modify_permission":0,
            "edit_data":1,
            "view":1
          }
        }
      ]
    },
    {
      "property_name":"xyz",
      "user_group":
      [
        {
          "name":"Admin",
          "type":"U",
          "id":1000,
          "permission":
          {
            "modify_permission":1,
            "edit_data":1,
            "view":1
          }
        }
      ]
    }
  ],
  "message":
  [ "success"
  ],
  "status":200
}
```

Schedule Sheet

- Authorization
- Get Schedule Sheet Data Mapping
- Get Schedule Sheets
- Update Schedule Activities
- Response Codes

Get Schedule Sheet Data Mapping

GET /ws/rest/service/v1/schedule/mapping/{project_number}

Purpose:

Get all list of data mappings defined for this schedule sheet.

Input:

Path Parameter

project_number(Required): Specify the project/shell number.

Url Parameter

sheetname(Required): name of the schedule sheet.

filter (Optional): Filter condition to be used when retrieving the data mapping. It is a JSON object with the below information:

"name"(Optional): Name of data mapping

"isdefault"(Optional): Specify "yes" to get only the default data mapping and "no" to get all the data mappings. Default is "no"

Output:

JSON object containing 'status', 'data', 'message'

A message will be present if the status is not 200; otherwise, it will be "success".

Sample Response

```
{
   "data":[
      {
        "name":"p6_mapping",
        "isdefault":"true"
     },
    {
        "name":"stage_mapping",
        "isdefault":"false"
```

```
      }
   ]
}
```

Get Schedule Sheets

GET /ws/rest/service/v1/schedule/{project_number}

Purpose:

Get the list of schedule sheet attributes defined in the project/shell.

Input:

Path Parameter

project_number(Required): Specify the project/shell number.

Url Parameter

filter (Optional): Filter condition to be used when retrieving the schedule sheet. It is a JSON object with the below information:

"status": Status of the schedule sheet that needs to be retrieved. Possible values are "active" and "inactive".

"main_sheet": Specify "true" to get the main schedule sheet or "false" to get other non-main schedule sheets.

"sheet_lock": Specify "true" to get the schedule sheets that are locked, "false" to get non locked schedule sheet.

"name": Specify the name of the schedule sheet that needs to be returned in the response.

> **Note**: All fields values of filter condition are case insensitive except the value of "name" field

Sample input parameter

```
{
   "filter":
      {
        "name":"Gas pipeline schedule",
        "status": "open"
      }
}
```

Output:

JSON object containing 'status', 'data', 'message'

A message will be present if the status is not 200; otherwise, it will be "success".

Sample Response

```
{
  "data": [],
  "message": [
    "Invalid Filter Condition : status"
  ],
  "status": 811
}
```

Update Schedule Activities

PUT /ws/rest/service/v1/schedule/file/{project_number}

Purpose:

Update schedule sheet activities using P6 xml file as an attachment to this service.

Input:

Path Parameter

project_number(Required): Specify the project/shell number.

POST body is a JSON with the below options

Sample Request

```
{
  "data": {
    "sheetName": "Gas pipeline schedule",
    "iszipfile": "yes"
  },
  "scheduleOptions": {
    "MapName": "p6_mapping",
    "ActivityIdentifier": "Id",
    "WBS_NoOfLevelsToMerge": "5",
    "WBS_StartMergeFrom": "2",
    "ActivityDeletion": "Auto",
    "ActivityFileName": "activity.xml",
    "SpreadFileName": "spreaddfile.xml",
    "CBS_FullPath":"Yes",
    "is_cumulative":"no"
```

```
  },
  "_attachment": {
    "file_name": "pipeline_schedule_p6.zip",
    "file_size": "746089",
    "file_content": "base64_encoded string of create.zip file"
  }
}
```

Output:

JSON object containing 'status', 'data', 'message'

A message will be present if the status is not 200; otherwise, it will be "success".

Sample Response

```
{
    "data": [],
    "message": [
        "success"
    ],
    "status": 200
}
```

Response Codes

Code	Message	Details
1400	Schedule Sheet operations are not possible on Generic type of Project	Not available.

Exchange Rates

Get Exchange Rates

GET /ws/rest/service/v1/exchange

Purpose:

Get Company Exchange Rates

Output:

JSON object containing 'status', 'data', 'message'

Get Exchange Rates output JSON


```
{
    "data":{
    "base_currency": "Indian Rupee (INR)",
    "exchange_rates": [
          {
            "currencyid":2,
            "rate":101.0,
            "currency_name":"Afghani (AFN)",
            "currency_code":"AFN"
          },
          {
            "currencyid":12,
            "rate":211.0,
            "currency_name":"Barbados Dollar (BBD)",
            "currency_code":"BBD"
          },
          {
            "currencyid":40,
            "rate":134.0,
            "currency_name":"Algeria Dinar (DZD)",
            "currency_code":"DZD"
          }
          ]
    },
    "message": [
      "success"
    ],
    "status": 200
}
```


Status codes are:

1 > 200, for success

Update Exchange Rates

PUT /ws/rest/service/v1/exchange

Purpose:

To add or modify currency rates of active exchange rates set.

Input:

Both input & output in JSON format in the body.

'currency_code' is required in the input request.

Update Exchange Rates input JSON

```
{
  "data":[
  {
    "currencyid":2,
    "rate":110.0,
    "currency_name":"Afghani (AFN)",
    "currency_code":"AFN"
  },
  {
    "currencyid":3,
    "rate":12.0,
    "currency_name":"Lek (ALL)",
    "currency_code":"ALL"
  }
  ]
}
```

Output:

JSON object containing 'status', 'data', 'message'

Update Exchange Rates output JSON

```
{
  "data":[
  {
    "currencyid":2,
    "rate":110.0,
    "currency_name":"Afghani (AFN)",
```

```
    "currency_code":"AFN"
  },
  {
    "currencyid":3,
    "rate":12.0,
    "currency_name":"Lek (ALL)",
    "currency_code":"ALL"
  }
  {
    "currencyid":40,
    "rate":134.0,
    "currency_name":"Algeria Dinar (DZD)",
    "currency_code":"DZD"
  },
  {
     "currencyid":12,
     "rate":211.0,
     "currency_name":"Barbados Dollar (BBD)",
     "currency_code":"BBD"
  },
  ],
  "message": [
    "success"
  ],
  "status": 200
}
```


Notes:

- Whenever request is made to this service, a new exchange rate will be created (with currencies of currently active exchange rate set), and this new exchange rate will be activated immediately.
- If currency object given in input request does not exist in the active exchange rate set, then this currency object will be added to existing currency list.
- If currency object given in input request exists in currently active exchange rate set, then the currency rate will be modified with the

value given in input object.

Status codes are:

1 > 200, for success

Data Structure Setup

Authorization

For more information, see the **Authentication** section in ***REST Services V1***.

Ensure that the integration user has the required Company Administration Permissions.

Get Data Elements

GET /ws/rest/service/v1/ds/data-elements

Version: 20.10

Purpose:

To get list of custom data elements

Input:

All parameters should be URL encoded.

Path Parameter

```
filter =
{
    "data_element": "",
    "data_definition": "Decimal Amount" ,
    "form_label": "" ,
    "description": "" ,
    "tooltip": ""
}
```

Notes:

- All field values in the filter object are case insensitive
- If filter object is not provided in the request, then all data elements list will be returned
- Condition type contains will be used to fetch the data elements
- Filter condition will be applied only if the provided filter values are not-null/non-empty.

Output:

JSON object containing 'status', 'data', 'message'

Get Data Element output JSON


```
{
  "data": [
    {
      "data_element": "sampleDE",
      "data_definition": "Decimal Amount",
      "form_label": "Sample Decimal Element",
      "description": "Test DE",
      "tooltip": null,
      "decimal_format": "5",
      "Pre-Defined Category": null
     },
    {
      "data_element": "sampleDE2",
      "data_definition": "Decimal Amount",
      "form_label": "Sample Decimal Element 2",
      "description": "Decimal DE",
      "tooltip": null,
      "decimal_format": "6",
      "Pre-Defined Category": null
     }, ...
  ],
  "message": [
      "success"
  ],
  "status": 200
}
```


Status codes are:

1> 200, for success

Create Data Element

POST /ws/rest/service/v1/ds/data-elements

Version: 20.10

Purpose:

To create custom data elements

Input:

All parameters should be URL encoded.

Both input & output in JSON format in the body

Create Data Element input JSON

```
{
  "data": [
    {
      "data_element": "sampleDE",
      "data_definition": "Decimal Amount",
      "form_label": "Sample Decimal Element",
      "description": "Test DE",
      "decimal_format": "5"
    },
    {
      "data_element": "sampleImgDE",
      "data_definition": "Image Picker",
      "form_label": "Sample Image Picker",
      "description": "Test Image DE",
      "tooltip": "Test Image DE"
    }
  ]
}
```

Input JSON field description:

- **Required Fields:**
  - data_element (Required): specify the unique date element name
  - data_definition (Required): specify the field definition to create data element of that type
  - form_label (Required): specify DE Label name
- **Non-required Fields:**
  - Description
  - Tooltip
- **Valid Fields based on the data_definition value:**

data_definition	Required Field Name
Image Picker	height (required)
SYS Rich Text	height (required)
textarea (as data_source)	no_of_lines (required)
Decimal Amount	decimal_format (not required - default value is '8')
SYS Numeric Query Based	hide_currency_symbol (not required - valid values are Yes/No - default value will be No)

Output:

JSON object containing 'status', 'data', 'message'

Create Data Element ouptut JSON


```
{
  "data": [
    {
      "data_element": "sampleDE",
      "data_definition": "Decimal Amount",
      "form_label": "Sample Decimal Element",
      "description": "Test DE",
      "tooltip": null,
      "decimal_format": "5" ,
      "Pre-Defined Category": null
     }
  ],
  "message": [
    {
      "data_element": "sampleDE",
      "message": "success"
    },
    {
      "data_element": "sampleImgDE",
      "message": "height is required",
      "status": 505
    }
  ],
```

```
  "status": 3000
}
```

Status codes are:

1> 200, for success

2> 3000, for partial create.

3> 3002, for invalid JSON input

4> 1101, for Empty or Invalid JSON data

Update Data Element

PUT /ws/rest/service/v1/ds/data-elements

Version: 20.10

Purpose:

To update custom data elements

Input:

All parameters should be URL encoded.

Both input & output in JSON format in the body

Update Data Element input JSON

```
{
  "data": [
    {
      "data_element": "sampleDE",
      "data_definition": "SYS Rich Text",
      "form_label": "Sample Rich Text Element",
      "description": "Test DE",
      "height": "50"
    },
    {
      "data_element": "sampleImgDE",
      "data_definition": "Image Picker",
      "form_label": "Sample Image Picker",
      "description": "Test Image DE",
      "tooltip": "Test Image DE"
    }
```

```
  ]
}
```

Input JSON field description:

- **Required Fields:**
  Data_element(Required): specify the existing date element name
- **Non-required Fields:**
  - Description
  - Tooltip
- **Valid Fields based on the data_definition value:**

data_definition	Required Field Name (Existing values will be used if there are no values in the request body)
Image Picker	height (required)
SYS Rich Text	height (required)
textarea (as data_source)	no_of_lines (required)
Decimal Amount	decimal_format (not required - default value is '8')
SYS Numeric Query Based	hide_currency_symbol (not required - valid values are Yes/No - default value will be No)

Notes:

- data_element field value will be used to uniquely identify the existing Data Element.
- Field values can be cleared by providing the empty string in the input request.
- data_definition and form_lable values cannot be emptied/cleared and if no values are provided in the request, existing values will be taken.
- data_definition field value of a DE cannot be updated if that DE is pre-defined or already deployed.
- For all the fields mentioned above, if no values are provided in the input request then existing values of the given data element will be taken.

Output:

JSON object containing 'status', 'data', 'message'

Update Data Element ouptut JSON

```
{
  "data": [
```

```
    {
      "data_element": "sampleDE",
      "data_definition": "SYS Rich Text",
      "form_label": "Sample Rich Text Element",
      "description": "Test DE",
      "tooltip": null,
      "height": "50" ,
      "Pre-Defined Category": null
     }
  ],
  "message": [
    {
      "data_element": "sampleDE",
      "message": "success"
    },
    {
      "data_element": "sampleImgDE",
      "message": "sampleImgDE does not exists",
      "status": 505
    }
  ],
  "status": 3000
}
```


Status codes are:

1> 200, for success

2> 3000, for partial create.

3> 3002, for invalid JSON input

4> 1101, for Empty or Invalid JSON data

Delete Data Elements

DELETE /ws/rest/service/v1/ds/data-elements

Version: 20.10

Purpose:

Deletes custom data elements

Input:

All parameters should be URL encoded.

Both input & output in JSON format in the body

Delete Data Element

```
{
"data":{
    "data_elements": ["simpleDE1", "simpleDE2", "simpleDE3",
"uuu_P6CSIndex"]
    }
}
```

Output:

JSON object containing 'status', 'data', 'message'

Delete Data Element

```
{
    "data": [],
    "message": [
        { "data_element": "SimpleDE1","status":
"200","message":"success"}  ,
        { "data_element": "SimpleDE2","status": "1521","message":"Data
Element is used in Unifier, it cannot be deleted."} ,
        { "data_element": "SimpleDE3","status": "1522","message":"This
data element is being used in uDesigner and cannot be deleted."} ,
        { "data_element": "uuu_P6CSIndex","status":
"1523","message":"Pre-Defined Data Elements cannot be deleted."}
    ],
    "status": 3000
}
```

Status codes are:

1> 200, for success

2> 3000, for partial delete

Create DDS Definition

POST /ws/rest/service/v1/ds/dds

Version: 20.10

Purpose:

To create Dynamic Data Set Definition

Input:

All parameters should be URL encoded.

Both input & output in JSON format in the body

Create Dynamic Data Set input JSON

```
{
 "data": [
          {
            "dds_name": "sampleDDS",
            "master_de_name": "countryDE",
            "dds_desc": "sampleDDS",
            "value_set":[
               {
                "data_element":"stateDE",
                 "order":1
                 },
                {
                 "data_element":"cityDE",
                 "order":2
                }
               ],
              "behavior_set":[
                {
                "data_element":"zipcodeDE"
                }
               ]
            },
            {
            "dds_name": "sampleDDS2",
            "master_de_name": "countryDE",
            "dds_desc": "sampleDDS",
            "value_set":[
```

```
                {
                 "data_element":"stateDE",
                 "order":2
                 },
                 {
                  "data_element":"cityDE",
                  "order":1
                  }
                ],
               "behavior_set":[
                 {
                 "data_element":"zipcodeDE"
                 }
                ]
            }
        ]
}
```

Input JSON field description:

- **Required Fields:**
  - dds_name: specify the unique DDS name
  - master_de_name: specify Master DE
  - data_element in value_set is required if the value_set is part of the input request
  - order: order of the value set DEs
- **Non Required Fields:**
  - description

Output:

JSON object containing 'status', 'data', 'message'

Create Dynamic Data Set ouptut JSON

```
{
   "data": [
           {
            "id":12,
            "dds_name": "sampleDDS2",
            "master_de_name": "countryDE",
```

```
            "dds_desc": "sampleDDS",
            "value_set":[
              {
              "data_element":"stateDE",
               "order":1
               },
              {
               "data_element":"cityDE",
               "order":2
              }
              ],
              "behavior_set":[
               {
                "data_element":"zipcodeDE"
               }
               ]
              }]
},
  "message": [
                 {
                    "dds_name": sampleDDS
                    "message": Name already exists. Enter a different
name.,
                    "status": 1500
                },
                {
                    "dds_name": "sampletest1",
                    "message": "usrServiceCategoryPD122",
                    "status": 200
                }
  ],
  "status": 3000
}
```

Status codes are:

1> 200 , for success

2> 3002, for invalid JSON input

3> 1101, for Empty or Invalid JSON data

Update DDS Definition

PUT /ws/rest/service/v1/ds/dds

Version: 20.10

Purpose:

To Update Dynamic Data Set Definition. Action JSON value 'delete' will used to remove any value or Behavior set data element for DDS Definition.

Previously existing value set or Behavior set data elements will be reordered based on latest order provided in values set/Behavior set in update DDS definition.

Input:

All parameters should be URL encoded.

Both input & output in JSON format in the body

Update Dynamic Data Set input JSON

```
{
 "data": [
          { "id":12,
            "dds_name": "sampleDDS",
            "master_de_name": "countryDE",
            "dds_desc": "desc",
            "value_set":[
               {
                "data_element":"stateDE",
                "order":1
                },
                {
                 "data_element":"cityDE",
                 "action":"delete"
                },
                {
                 "data_element":"address",
                 "order":2
```

```
                }
               ],
              "behavior_set":[
                {
                "data_element":"zipcodeDE"
                }
               ]
            },
            {
            "dds_name": "sampleDDS2",
            "master_de_name": "countryDE",
            "dds_desc": "desc",
            "value_set":[
               {
                "data_element":"stateDE",
                "order":1
                },
                {
                 "data_element":"cityDE",
                 "order":2
                }
               ],
              "behavior_set":[
                {
                "data_element":"zipcodeDE"
                }
               ]
            }
        ]
}
```

Input JSON field description:

- **Required Fields:**
  id : specify the DDS id which needs to be updated

Note: action: "delete" required to delete value set or behavior set data element in DDS Definition

Output:

JSON object containing 'status', 'data', 'message'

Update Dynamic Data Set ouptut JSON


```
{
   "data": [
           {
            "id":12,
            "dds_name": "sampleDDS",
            "master_de_name": "countryDE",
            "dds_desc": "desc",
            "value_set":[
              {
              "data_element":"stateDE",
               "order":1
               },
              {
               "data_element":"address",
               "order":2
              }
              ],
              "behavior_set":[
               {
                "data_element":"zipcodeDE"
               }
               ]
              }]
         },
   "message": [
                 {
                    "dds_name": "sampleDDS"
                    "message": "usrServiceCategoryPD122",
                    "status": 200
```

```
                },
                {
                    "dds_name": "sampleDDS2",
                    "message": Name already exists. Enter a different
name.,
                    "status": 1500

                }
  ],
  "status": 3000
}
```

Status codes are:

1> 200 , for success

2> 3002, for invalid JSON input

3> 1101, for Empty or Invalid JSON data

Delete DDS Definition

DELETE /ws/rest/service/v1/ds/dds

Version: 20.10

Purpose:

To delete Dynamic Data Set Definition

Input:

All parameters should be URL encoded.

Both input & output in JSON format in the body

Delete Dynamic Data Set input JSON

```
{
 "data": {
   "dds_name": ["sampleDDS","sampleDDS2"]
  }
}
```

Input JSON field description:

- **Required Fields:**
  dds_name: DDS name

Output:

JSON object containing 'status', 'data', 'message'

Delete Dynamic Data Set ouptut JSON

```
{
    "data": {

    },
    "message": [

          { name: "SampleDDS","status": "200","message":"success"},
          { name: "SampleDDS2","status": "1509","message":"DDS does not
exist"}

    ],
    "status": 3000
}
```

Status codes are:

1> 200 , for success

2> 3002, for invalid JSON input

3> 1101, for Empty or Invalid JSON data

Get DDS Definition

GET /ws/rest/service/v1/ds/dds

Version: 20.10

Purpose:

To get Dynamic Data set Definition

Input:

All parameters should be URL encoded.

URL query parameter -

```
filter=
{
"dds_name":"Sample DDS"
}
```

Supported options in filter:

- dds_name: specify the DDS name

- master_de_name: specify Master DE
- dds_desc: Description of the DDS
- master_de_label: Form Label of the Master DE

> **Note:** If no filter options provided service will return all DDS.

Both input & output in JSON format in the body

Get Dynamic Data Set input filter

```
"filter":
         {
           "dds_name": "sampleDDS",
           "master_de_name": "countryDE",
           "dds_desc": "sampleDDS",
           "master_de_label": "my sample"
           }
```

Input JSON field description:

- Non Required Fields:
  - dds_name: specify the DDS name
  - master_de_name: specify Master DE
  - dds_desc: Description of the DDS
  - master_de_label: Form Label of the Master DE

  It is a "contains" and case insensitive search.

Output:

JSON object containing 'status', 'data', 'message'

Get Dynamic Data Set output JSON

```
{
   "data": [
           {
            "id":12,
            "dds_name": "sampleDDS",
            "master_de_name": "countryDE",
            "dds_desc": "sampleDDS",
            "master_de_label": "my sample"
            "value_set":[
              {
              "data_element":"stateDE",
```

```
                "order":1
                },
               {
                "data_element":"cityDE",
                "order":2
               }
               ],
               "behavior_set":[
                {
                 "data_element":"zipcodeDE"
                }
                ]
               }]
},
  "message":  [
     "Success"
  ],
  "status":200
}
```


Status codes are:

1> 200, for success

2> 3002, for invalid JSON input

3> 1101, for Empty or Invalid JSON data

Create DDS Data

POST /ws/rest/service/v1/ds/ddsdata

Version: 20.10

Purpose:

To create data set for a given Dynamic Data Set

Input:

All parameters should be URL encoded.

Both input & output in JSON format in the body

Create DDS Data input JSON

```
{   "data": {
        "dds_name": "mydds",
        "data_set": [{
                "masterDE":"value2",
                "value_set": {
                    "valueDE1": "value1",
                    "valueDE2": "value2"
                },
                "behavior_set": {
                    "behavede1": "disabled"
                }
            },
            {    "masterDE":"value1",
                "value_set": {
                    "valueDE1": "value1",
                    "valueDE2": "value3"
                },
                "behavior_set": {
                    "behavede1": "Required"
                }
            }
        ]
    }
}
```

Input JSON field description:

- **Required Fields:**
  - dds_name(Required): specify the dynamic data set for which the data needs to be created
  - value set(Required if configured): specify the values for the DEs defined as value
- **Non Required Fields:**
  - behavior set(required if configured): specify the value for the DEs defined as behavior

Output:

JSON object containing 'status', 'data', 'message'

Create DDS data output JSON

```
{
    "data": {
        "dds_name": "mydds",
        "data_set": [{
                "id": 710,
                "masterDE":"value1",
                "value_set": {
                    "dename1": "value",
                    "dename2": "value"
                },
                "behavior_set": {
                    "dename3": "disabled"
                }
            },
            {
                "id": 711,
                "masterDE":"value2",
                "value_set": {
                    "dename1": "value",
                    "dename2": "value"
                },
                "behavior_set": {
                    "dename3": "disabled"
                }
            }
        ]
    },
    "message":  "success"   ,
    "status": 200
}
```


Status codes are:

1> 200, for success

2> 3002, for invalid JSON input

3> 1101, for Empty or Invalid JSON data

Update DDS Data

POST /ws/rest/service/v1/ds/ddsdata

Version: 20.10

Purpose:

To update data set for a given Dynamic Data Set

Input:

All parameters should be URL encoded.

Both input & output in JSON format in the body

Update DDS Data input JSON

```
{   "data": {
        "dds_name": "mydds",
        "data_set": [{
                "id": 710,
                "masterDE":"value1updated",
                "value_set": {
                    "valueDE1": "value1updated",
                    "valueDE2": "value2updated"
                },
                "behavior_set": {
                    "behavede1": "disabled"
                }
            },
            {
                "id": 711,
                "countryDE":"value2updated",
                "value_set": {
                    "valueDE1": "value1",
                    "valueDE2": "value3"
                },
                "behavior_set": {
                    "behavede1": "Required"
```

```
                }
            }
        ]
    }
}
```

Input JSON field description:

- **Required Fields:**
  - dds_name: specify the dds name for which the data needs to be updated
  - id: specify the dda data row id to uniquely identify the data set

Output:

JSON object containing 'status', 'data', 'message'

Update DDS data output JSON

```
{
    "data": {
        "dds_name": "mydds",
        "data_set": [{
                "id": 710,
                "masterDE":"value1updated",
                "value_set": {
                    "dename1": "value",
                    "dename2": "value"
                },
                "behavior_set": {
                    "dename3": "disabled"
                }
            },
            {
                "id": 711,
                "masterDE":"value1updated",
                "value_set": {
                    "dename1": "value",
                    "dename2": "value"
                },
                "behavior_set": {
```

```
                    "dename3": "disabled"
                }
            }
        ]
    },
    "message":  "success"   ,
    "status": 200
}
```

Status codes are:

1> 200, for success

2> 3002, for invalid JSON input

3> 1101, for Empty or Invalid JSON data

Delete DDS Data

DELETE /ws/rest/service/v1/ds/ddsdata

Version: 20.10

Purpose:

To delete DDS data

Input:

All parameters should be URL encoded.

Both input & output in JSON format in the body

Delete DDS data input JSON

```
{
 "data": {
   "dds_name": "sampleDDS",
   "id":[712,714]
  }
}
```

Input JSON field description:

- **Required Fields:**
  - dds_name: specify the DDS name of the ddds data set to be deleted. Multiple DDS can be deleted in one request.
  - id: id of the DDS data set.

    Note: Use id vs value set and behavior set combination

Output:

JSON object containing 'status', 'data', 'message'

Delete DDS data output JSON

```
{
    "data": {

    },
    "message": [

          { id: "712","status": "200","message":"success"},
          { id: "714","status": "1509","message":"DDS does not exist"}

    ],
    "status": 3000
}
```

Status codes are:

1> 200, for success

2> 3002, for invalid JSON input

3> 1101, for Empty or Invalid JSON data

Get DDS Data

GET /ws/rest/service/v1/ds/ddsdata

Version: 20.10

Purpose:

To get DDS data

Input:

All parameters should be URL encoded.

URL query parameter -

dds_name="sample dds"

filter=

{

"masterDE":"val1",

"value_set":{ "leed":"test","uuu_state":"TS"}

"behavior_set":{"uuu_name":"Required","uuu_desc":"Disabled"}

}

Supported options in filter :

master_de_value: specify Master DE value

value_de: specify the value de with the values if configured

behavior_de :specify the value of behavior de with the values if configured

Both input & output in JSON format in the body

Get DDS data input filter

"dds_name": "sampleDDS",

"filter":

{

"countryDE":"IN",

"value_set":{ "leed":"test","uuu_state":"TS"}

}

Input JSON field description:

- **Required Fields:**
  - dds_name:specify the name of the dds
- **Non Required Fields:**
  - master_de_value: specify Master DE value
  - value_de1_value: Value of the value_de if configured
  - behavior_de1_value: Value of the behavior_de if configured

It is a equals and case insensitive search

> **Note:** If more than one Value DE is configured, it can be used in filter using value_de2

Output:

JSON object containing 'status', 'data', 'message'

Get Dynamic Data Set output JSON

```
{
    "data": [{
        "id":720,
        "dds_name": "sampleDDS",
        "data_set": [{
                "id": 710,
                "CountryDE":"IN",
```

```
                "value_set": {
                    "leed": "test",
                    "uuu_state": "TS"
                },
                "behavior_set": {
                    "contract_name": "disabled"
                }
                }]
          }],
  "message":  [
     "Success"
  ],
  "status":200
}
```


Status codes are:

1> 200, for success

2> 3002, for invalid JSON input

3> 1101, for Empty or Invalid JSON data

Get Data Definition

GET /ws/rest/service/v1/ds/data-def

Version: 20.11

Purpose:

To get list of data definitions

Input:

All parameters should be URL encoded.

Path Parameter

type = Basic / Cost Codes / Data Picker

filter =


```
{
    "name": "Sample DD Name",
        "data_source": ""
    }
```

Notes:

- All field values in the filter object are case insensitive type is case insensitive.
- If filter object is not provided in the request, then all data definitions list will be returned
- Condition type contains will be used to fetch the data definitions
- Filter condition will be applied only if the provided filter values are not-null/non-empty.
- type: possible values will be Basic, Cost Codes, Data Picker
- name: Name of the Data definition
- data_source: Data source of the data picker. Only applicable for data picker type.

Output:

JSON object containing 'status', 'data', 'message'

Basic type Output:

Get Data Definition of type Basic output JSON


```
{
 "data": [
        {
            "data_size": 0,
            "name": "Account Code Picker",
            "data_type": "Integer",
            "input_type": "Picker",
            "used": "Yes",
            "category": "System"
        },
        {
            "data_size": 128,
            "name": "Account Type PD",
            "data_type": "String",
            "input_type": "Pull-down Menu",
            "data_set": [],
            "used": "Yes",
            "category": "Company"
        },
```

```
        {
            "data_size": 128,
            "name": "Action Required PD",
            "data_type": "String",
            "input_type": "Pull-down Menu",
            "dataset_non_modifiable": "No",
            "data_set": [
                {
                    "status": "Active",
                    "value": "No",
                    "label": "No",
                    "row_num": 1,
                    "is_default": "No"
                },
                {
                    "status": "Active",
                    "value": "Yes",
                    "label": "Yes",
                    "row_num": 2,
                    "is_default": "No"
                }
            ],
            "used": "Yes",
            "category": "^Company"
        }
    ],
    "message": [
        "success"
    ],
    "status": 200
}
```


Cost Code type Output:

Get Data Definition of type Cost Codes output JSON

```
{
 "data": [{
            "data_size": 32,
            "name": "Segment 1",
            "data_type": "String",
            "input_type": "Text Box",
            "used": "Yes",
            "label": "Segment 1",
            "category": "CBS Code"
        },
        {
            "data_size": 32,
            "name": "segment 2",
            "data_type": "String",
            "input_type": "Pull-down Menu",
            "label": "Segment 2",
            "dataset_non_modifiable": "Yes",
            "data_set": [
                {
                    "status": "Active",
                    "value": "Yes",
                    "label": "Yes",
                    "row_num": 1,
                    "is_default": "No"
                },
                {
                    "status": "Active",
                    "value": "No",
                    "label": "No",
                    "row_num": 2,
                    "is_default": "No"
                }
            ],
            "used": null,
```

```
            "category": "CBS Code"
        }
    ],
    "message": [
        "success"
    ],
    "status": 200
}
```


DataPicker type output:

Get Data Definition of type Data Pickers output JSON


```
{
 "data": [
        {
            "data_element": "uuu_user_name",
            "display_element": "Name",
            "name": "Action Item Approver DP",
            "used": "Yes",
            "category": "User Attributes",
            "data_source": "User Attributes"
        },
        {
            "data_element": "space_sp_space_name",
            "display_element": "Space Name",
            "name": "Usable Space DP",
            "used": "Yes",
            "category": "Space Manager",
            "data_source": "Usable Space"
        },
        {
            "data_element": "ugenPropertyName",
            "display_element": "Property Name",
            "name": "Property DP",
            "used": "Yes",
```

```
            "category": "Business Process",
            "data_source": "Prospective Properties"
        },
        {
            "data_element": "uveVendorNameTB50",
            "display_element": "Vendor Name",
            "name": "Vendors PK",
            "used": "Yes",
            "category": "Business Process",
            "data_source": "Vendors"
        }
    ],
    "message": [
        "success"
    ],
    "status": 200
}
```


Status codes are:

1> 200, for success

Create Data Definition

POST /ws/rest/service/v1/ds/data-def

Version: 20.11

Purpose:

To create data definition

Input:

All parameters should be URL encoded.

Both input & output in JSON format in the body

Create DD Basic type

Input JSON field description:

Required Fields:

- name: specify the data definition name
- type: Basic
- data_type: Integer/String are possible values.

- input_type: Text Box, Pull-down Menu, Radio Buttons, Multi-select Input, Multiple Text Lines, Checkbox are possible values based on the data type.
- data_size: has to be provided for Text Box and Multiple Text Lines.

Non-required Fields:

- default_value: Default value can be set.
- data_set: Value and Labels for Pull-down Menu , Radio buttons, Multi-select Input
- dataset_non_modifiable: Yes/No.

Valid Fields based on the data_definition:

data_type	input_type	datasize	separator	data_set
Integer	Checkbox	n/a	n/a	n/a
Integer	Pull-down Menu	n/a	n/a	pull down value and labels need to be set
Integer	Radio Buttons	n/a	n/a	value and labels need to be set
String	Text Box	required.	n/a	n/a
String	Multiple Text Lines	required.	n/a	n/a
String	Pull-down Menu	n/a	n/a	pull down value and labels need to be set
String	Radio Buttons	n/a	n/a	value and labels need to be set
String	Multi-select Input	n/a	comma is the separator.	value need to be set

Notes:

- Category will be defaulted to "Company" in case of basic type of data definition.
- "System" category type of data definition cannot be created.
- type is case insensitive.
- dataset_non_modifiable is case insensitive.

Basic type input JSON

```
{
 "options":{
            "type": "Basic"
  },
```

```
"data": [{
        "name": "sample basic 1",
        "data_size": "128",
        "data_type": "String",
        "input_type": "Text Box"
    },
    {
        "name": "sample basic 2",
        "data_type": "Integer",
        "input_type": "Pull-down Menu",
        "dataset_non_modifiable": "Yes",
        "data_set": [{
            "value": 0,
            "label": "first",
            "row_num": 1,
            "status": "Active",
            "is_default": "No"
        },
        {
            "value": 1,
            "label": "Fixed Amount",
            "row_num": 2,
            "status": "Active",
            "is_default": "Yes"
        },
        {
            "value": 2,
            "label": "last",
            "row_num": 3,
            "status": "Active",
            "is_default": "No"
        }
    ]
```

```
        }
    ]
}
```


Output:

JSON object containing 'status', 'data', 'message'.

Basic type output JSON


```
{
    "data": [
        {
            "data_size": "128",
            "name": "sample basic 1",
            "data_type": "String",
            "input_type": "Text Box",
            "default_value": "",
            "used": "",
            "category": "Company"
        },
        {
            "data_size": "0",
            "dataset_non_modifiable": "Yes",
            "name": "sample basic 2",
            "data_type": "Integer",
            "input_type": "Pull-down Menu",
            "data_set": [
                {
                    "value": "0",
                    "row_num": 1,
                    "status": "Active",
                    "label": "first",
                    "is_default": "No"
                },
                {
                    "value": "1",
```

```
                    "row_num": 2,
                    "status": "Active",
                    "label": "Fixed Amount",
                    "is_default": "Yes"
                },
                {
                    "value": "2",
                    "row_num": 3,
                    "status": "Active",
                    "label": "last",
                    "is_default": "No"
                }
            ],
            "used": "",
            "category": "Company"
        }
    ],
    "message": [
        {
            "message": "success",
            "data_definition": "sample basic 1",
            "status": 200
        },
        {
            "message": "success",
            "data_definition": "sample basic 2",
            "status": 200
        }
    ],
    "status": 200
}
```


Create DD Cost Code type

Input JSON field description:

Required Fields:

name: specify the field definition name

type: Cost Codes

label : has to be specified.

input_type: Text Box, Pull-down Menu are possible values.

Non-required Fields:

default value: Default value can be set.

data_set: Value and Labels are applicable for Pull down menu.

dataset_non_modifiable: Yes/No.

Notes:

- Category will be defaulted to "CBS Code" in case of cost codes type of data definition.
- type is case insensitive.
- dataset_non_modifiable is case insensitive.

Cost Codes type input JSON

```
{
"options":{
        "type": "Cost Codes"
 },
 "data": [{
        "name": "sample costcode 1",
        "input_type": "Text Box",
        "label": "Test 1"
    },
    {
        "name": "sample costcode 2",
        "input_type": "Pull-down Menu",
        "label": "Test 2",
        "dataset_non_modifiable": "No",
        "data_set": [{
                "value": "Type 1",
                "label": "first",
                "row_num": 1,
```

```
                    "status": "Active",
                    "is_default": "Yes"

                },
                {
                    "value": "Type 2",
                    "label": "Fixed Amount",
                    "row_num": 2,
                    "status": "Active",
                    "is_default": "No"

                },
                {
                    "value": "Type 3",
                    "label": "last",
                    "row_num": 3,
                    "status": "Inactive",
                    "is_default": "No"
                }
            ]
        }
    ]
}
```


Output:

JSON object containing 'status', 'data', 'message'

Cost Codes type output JSON


```
{
    "data": [
        {
            "data_size": "32",
            "name": "sample costcode 1",
            "data_type": "String",
            "input_type": "Text Box",
```

```
        "default_value": "",
        "used": "",
        "label": "Test 1",
        "category": "CBS Code"
    },
    {
        "data_size": "32",
        "dataset_non_modifiable": "No",
        "name": "sample costcode 2",
        "data_type": "String",
        "input_type": "^ull-down Menu",
        "data_set": [
            {
                "value": "Type 1",
                "row_num": 1,
                "status": "Active",
                "label": "first",
                "is_default": "Yes"
            },
            {
                "value": "Type 2",
                "row_num": 2,
                "status": "Active",
                "label": "Fixed Amount",
                "is_default": "No"
            },
            {
                "value": "Type 3",
                "row_num": 3,
                "status": "Inactive",
                "label": "last",
                "is_default": "No"
            }
```

```
            ],
            "used": "",
            "label": "Test 2",
            "category": "CBS Code"
        }
    ],
    "message": [
        {
            "message": "success",
            "data_definition": "sample costcode 1",
            "status": 200
        },
        {
            "message": "success",
            "data_definition": "sample costcode 2",
            "status": 200
        }
    ],
    "status": 200
}
```


Create DD Data Picker type

Input JSON field description:

Required Fields:

name: specify the field definition name

category: Business process, Shell Manager, Planning Items, Resource Manager, User Attributes and Space Manager are the system defined categories. You can provide other category values based on the modules loaded in the environment, for example, Material Inventory Manager.

data_source: name of the data source for the given category

data_element: provide the data element for the selected data source.

type: Data Picker

> **Note**: Type is case insensitive.

Data Picker type input JSON


```
{
```

```
 "options":{
            "type": "Data Picker"
 },
 "data": [{
            "name": "sample dp 1",
            "category": "Business Process",
            "data_source": "Vendors",
            "data_element": "uuu_user_name"
        },
        {
            "name": "sample dp 2",
            "category": "Shell Manager",
            "data_source": "Buildings",
            "data_element": "uBuildingNumber"
        }
    ]
}
```

Output:

JSON object containing 'status', 'data', 'message'

Data Picker type output JSON

```
{
    "data": [
        {
            "data_element": "uBuildingNumber",
            "display_element": "Building Code",
            "name": "sample dp 2",
            "used": "",
            "category": "Shell Manager",
            "data_source": "Buildings"
        }
    ],
    "message": [
        {
```

```
            "message": "invalid data element provided for Vendors",
            "data_definition": "sample dp 1",
            "status": 619
        },
        {
            "message": "success",
            "data_definition": "sample dp 2",
            "status": 200
        }
    ],
    "status": 3000
}
```


Status codes are:

1> 200, for success

2> 3000, for partial create.

3> 3002, for invalid JSON input

4> 1101, for Empty or Invalid JSON data

5> 619, for invalid field value

6> 620, for input is required.

Update Data Definition

PUT /ws/rest/service/v1/ds/data-def

Version: 20.11

Purpose:

To update data definition

Input:

All parameters should be URL encoded.

Both input & output in JSON format in the body

Update Basic Data Defintion:

Input JSON field description:

Required Fields:

- name: specify the data definition name
- type: Basic

Non-required Fields:

- default_value: Default value can be set.
- data_set: Value and Labels for Pull-down Menu , Radio buttons, Multi-select Input
- dataset_non_modifiable: Yes/No.
- dataset_delete_all: Yes

Notes:

- Default value for a data picker can only be updated as part of basic data definition type.
- Sequential ordering of data set is mandatory else it returns an error.
- The data_set which is provided in the input will completely replace the existing data_set. So be sure to get the data_set through GET call and use it for any type of update operations on data_set.
- If data_set is not provided or is empty then existing data_set will not be modified at all.
- Type is case insensitive.
- dataset_non_modifiable is case insensitive.
- dataset_delete_all: if user wants to remove all data set values then they can use this field. This field is case insensitive.

Update Basic Data Definition input JSON

```
{
  "options":{
            "type": "Basic"
  },
  "data": [
    {
        "name": "sample basic 1",
        "default_value": "Entering default value"
    },
    {
     "name": "sample basic 2",
     "dataset_non_modifiable": "No",
     "data_set": [
                {
                    "value": "0",
                    "row_num": 1,
                    "status": "Active",
                    "label": "first",
```

```
                    "is_default": "No"
                },
                {
                    "value": "1",
                    "row_num": 2,
                    "status": "Inactive",
                    "label": "Fixed Amount",
                    "is_default": "No"
                }
        ]
    }
  ]
}
```


Output:

JSON object containing 'status', 'data', 'message'

Update Basic Data Definition output JSON


```
{
    "data": [
        {
            "data_size": "128",
            "name": "sample basic 1",
            "data_type": "String",
            "input_type": "Text Box",
            "default_value": "Entering default value",
            "used": "",
            "category": "Company"
        },
        {
            "data_size": "0",
            "dataset_non_modifiable": "No",
            "name": "sample basic 2",
            "data_type": "Integer",
            "input_type": "Pull-down Menu",
```

```
            "data_set": [
                {
                    "value": "0",
                    "row_num": 1,
                    "status": "Active",
                    "label": "first",
                    "is_default": "No"
                },
                {
                    "value": "1",
                    "row_num": 2,
                    "status": "Inactive",
                    "label": "Fixed Amount",
                    "is_default": "No"
                }
            ],
            "used": "",
            "category": "Company"
        }
    ],
    "message": [
        {
            "message": "success",
            "data_definition": "sample basic 1",
            "status": 200
        },
        {
            "message": "success",
            "data_definition": "sample basic 2",
            "status": 200
        }
    ],
    "status": 200
}
```

Update Cost Codes Data Defintion:

Input JSON field description:

Required Fields:

- name: specify the data definition name
- type: Cost Codes
- Non-required Fields:
- default_value: Default value can be set.
- data_set: Value and Labels for Pull-down Menu
- dataset_non_modifiable: Yes/No.
- dataset_delete_all: Yes

Notes:

- Sequential ordering of data set is mandatory else it returns an error.
- The data_set which is provided in the input will completely replace the existing data_set. So be sure to get the data_set through GET call and use it for any type of update operations on data_set.
- If data_set is not provided or is empty then existing data_set will not be modified at all.
- Type is case insensitive.
- dataset_non_modifiable is case insensitive
- dataset_delete_all: if user wants to remove all data set values then they can use this field. This field is case insensitive.

Update Cost Codes Data Definition input JSON

```
{
  "options":{
            "type": "Cost Codes"
  },
  "data": [
    {
        "name": "sample costcode 1",
        "default_value": "Entering default value"
    },
    {
     "name": "sample costcode 2",
     "dataset_non_modifiable": "No",
     "data_set": [
                {
```

```
                    "value": "0",
                    "row_num": 1,
                    "status": "Active",
                    "label": "first",
                    "is_default": "No"
                },
                {
                    "value": "1",
                    "row_num": 2,
                    "status": "Inactive",
                    "label": "Fixed Amount",
                    "is_default": "No"
                }
        ]
    }
  ]
}
```


Output:

JSON object containing 'status', 'data', 'message'

Update Cost Codes Data Definition output JSON


```
{
    "data": [
        {
            "data_size": "32",
            "name": "sample costcode 1",
            "data_type": "String",
            "input_type": "Text Box",
            "default_value": "Entering default value",
            "used": "",
            "label": "Test 1",
            "category": "CBS Code"
        },
        {
```

```
            "data_size": "32",
            "dataset_non_modifiable": "No",
            "name": "sample costcode 2",
            "data_type": "String",
            "input_type": "Pull-down Menu",
            "data_set": [
                {
                    "value": "0",
                    "row_num": 1,
                    "status": "Active",
                    "label": "first",
                    "is_default": "No"
                },
                {
                    "value": "1",
                    "row_num": 2,
                    "status": "Inactive",
                    "label": "Fixed Amount",
                    "is_default": "No"
                }
            ],
            "used": "",
            "label": "Test 2",
            "category": "CBS Code"
        }
    ],
    "message": [
        {
            "message": "success",
            "data_definition": "sample costcode 1",
            "status": 200
        },
        {
            "message": "success",
```

```
            "data_definition": "sample costcode 2",
            "status": 200
        }
    ],
    "status": 200
}
```

Status codes are:

1> 200, for success

2> 3000, for partial create.

3> 3002, for invalid JSON input

4> 1101, for Empty or Invalid JSON data

5> 619, for invalid field value

6> 620, for input is required.

Delete Data Definition

DELETE /ws/rest/service/v1/ds/data-def

Version: 20.11

Purpose:

Deletes data definition

Input:

All parameters should be URL encoded.

Both input & output in JSON format in the body

options: user has to specify the type of data definition; that is, Basic, Cost Codes, Data Picker.

> **Note**: Type is case insensitive.

Delete Data Definition Input JSON

```
{
"options":{
    "type": "Basic"
  },
"data":{
    "data_definitions": ["simple DD1", "simple DD2"]
    }
}
```

Output:

JSON object containing 'status', 'data', 'message'

Delete Data Definition Output JSON

```
{
    "data": [],
    "message": [
        { data_definition: "Simple DD1","status": "1531","message":"You
can not delete deployed definitions."}  ,
        { data_definition: "Simple DD2","status":
"200","message":"success"}
    ],
    "status": 3000
}
```

Status codes are:

1> 200, for success

2> 3000, for partial delete

3> 1531, for cannot delete data definition.

4> 1532, for data definition does not exists.

5> 3002, for invalid JSON input.

Response Error Codes

The following lists the response error codes for the REST API Details in Data Structure Setup:

Code	Message	Details
200	success	If the request is successful
500	Server Error, contact the system administrator.	If there is server exception when running this service
600	Invalid options	
619	Invalid field value (or) a field-specific error message will be displayed	If an unsupported value is provided for any field
620	Input Required (or) a field-specific error message will be displayed	If the required field value is not provided in the request
1101	Empty or Invalid JSON data	
1500	Required field validation for DDS Name	

1501	Cannot begin with a number.	
1502	Allowed characters are A-Z a-z 0-9 _	
1503	Reserved word validation (Eg: starts with sys,uuu..etc)	
1504	Starts with Underscore validation	
1505	Field Max length validation.	
1506	Value set contains Master data element	
1507	Invalid Order for Value set and Behavior set	
1508	DDS name already Exist	
1509	Invalid Data element in DDS Definition	
1510	DDS usage validation for update and delete DDS Definition.	
1511	Invalid DDS name	
1512	Value Set is Required	
1513	Invalid DDS Data Options	
1514	Option value was doesn't match the available data options	
1515	Duplicate dds data combination.	
1516	Restricted data element that is part of the behavior. The value of this data element cannot be set as Disabled and Clear	
1517	Value Set/Behavior Set contains duplicate DE's for DDS name	
1518	Invalid DDS Data id	
1519	Invalid Action for Update DDS Definition	
1520	data_definition value cannot be updated	If the DE is pre-defined or deployed then data_definition of that DE cannot be updated
1521	Data Element is used in Unifier, it cannot be deleted.	
1522	This data element is being used in uDesigner and cannot be deleted.	
1523	Pre-Defined Data Elements cannot be	

	deleted.	
1531	Cannot delete data definition.	
1532	Data definition does not exists.	
3000	Partial delete	
3002	Invalid Input	

Partner Company

The following table contains detailed information on Data Elements related to Partner Company REST Services V1:

Element	Sub-element	UI Label	Data Type	Mandatory?	GET	CREATE	UPDATE	Note
companyname		Name	String	Y	√	√	√	
shortname		Short Name	String	Y	√	√	√	
description		Description	String		√	√	√	
duns		DUNS	String		√	√	√	
url		Home Page URL	String		√	√	√	
helpurl		Help URL	String		√	√	√	
status		Status	Integer		√	√	√	This is optional. If not supplied, inactive company will be created. Possible values are 0 for inactive, and 1 for

								active.
support_contactemail		Support Contact Info - Email	String		√	√	√	
support_contactphone		Support Contact Info - Phone	String		√	√	√	
support_instructions		Support Contact Info - Instructions	String		√	√	√	
support_emailnotification		Support Contact Info - Email Notifications	String		√	√	√	
elearn_url		eLearning Access - URL	String		√	√	√	
elearn_label		eLearning Access - Label	String		√	√	√	
elearn_contactemail		eLearning Access - Contact Email	String		√	√	√	
elearn_instructions		eLearning Access - Instructions	String		√	√	√	

addresses					√	√	√	This is optional. If not supplied, one of the owner company address will be added to this company.
	address type	At Address Tab - Address Type	Integer	Y	√	√	√	For possible value, see ***Company Address***. If not sure, provide 1 for address type "Headquarter".
	addressline1	At Address Tab - Address 1	String	Y	√	√	√	
	addressline2	At Address Tab - Address 2	String		√	√	√	
	addressline3	At Address Tab - Address 3	String		√	√	√	
	city	At	String	Y	√	√	√	

		Address Tab - City						
	state	At Address Tab - State	String	Y	√	√	√	
	zip	At Address Tab - Zip/Postal Code	String	Y	√	√	√	
	country	At Address Tab - Country/Region	String	Y	√	√	√	For a list of country codes, see the table later in this topic.
	phone	At Address Tab - Phone	String		√	√	√	
	fax	At Address Tab - Fax	String		√	√	√	
passwordpolicy					√	√	√	This is optional. If not supplied, owner company password policy will be added to this company.

	min_length	At Security Tab - Minimum overall character(s)	Integer	Y	√	√	√	
	max_length	At Security Tab - Maximum overall character(s)	Integer		√	√	√	
	min_numericchar	At Security Tab - Minimum numeric character(s)	Integer		√	√	√	
	min_alpchar	At Security Tab - Minimum alphabetic character(s)	Integer		√	√	√	
	min_spechar	At Security Tab - Minimum special character(s)	Integer		√	√	√	
	chk_uname	At Security Tab - Password	Integer		√	√	√	

		cannot be same as Username						
	chk_flname	At Security Tab - Password cannot be same as First or Last Name	Integer		√	√	√	
	chk_prevpwd	At Security Tab - Password cannot be same as last	Integer		√	√	√	
	pwd_validfor	At Security Tab - Password expiration	Integer		√	√	√	
	inform_exp	At Security Tab - Inform user before expiration	Integer		√	√	√	
	max_attempts	At Security Tab - Maximum login attempt	Integer		√	√	√	

		s						
	max_inactive	At Security Tab - Suspend inactive user after	Integer		√	√	√	

Country List and Country Codes

Code	Country/Territory
AF	Afghanistan
AL	Albania
DZ	Algeria
AS	American Samoa
AD	Andorra
AO	Angola
AI	Anguilla
AQ	Antarctica
AG	Antigua and Barbuda
AR	Argentina
AM	Armenia
AW	Aruba
AU	Australia
AT	Austria
AZ	Azerbaijan
BS	Bahamas
BH	Bahrain
BD	Bangladesh
BB	Barbados
BY	Belarus
BE	Belgium
BZ	Belize

Code	Country/Territory
BJ	Benin
BM	Bermuda
BT	Bhutan
BO	Bolivia
BA	Bosnia and Herzegovina
BW	Botswana
BV	Bouvet Island
BR	Brazil
IO	British Indian Ocean Territory
BN	Brunei
BG	Bulgaria
BF	Burkina Faso
BI	Burundi
KH	Cambodia
CM	Cameroon
CA	Canada
CV	Cape Verde
KY	Cayman Islands
CF	Central African Republic
TD	Chad
CL	Chile
CN	China
CX	Christmas Island
CC	Cocos (Keeling) Islands
CO	Colombia
KM	Comoros
CG	Congo
CK	Cook Islands
CR	Costa Rica
CI	Côte d'Ivoire
HR	Croatia (Hrvatska)

Code	Country/Territory
CU	Cuba
CY	Cyprus
CZ	Czech Republic
CD	Congo (DRC)
DK	Denmark
DJ	Djibouti
DM	Dominica
DO	Dominican Republic
TP	East Timor
EC	Ecuador
EG	Egypt
SV	El Salvador
GQ	Equatorial Guinea
ER	Eritrea
EE	Estonia
ET	Ethiopia
FK	Falkland Islands (Islas Malvinas)
FO	Faroe Islands
FJ	Fiji Islands
FI	Finland
FR	France
GF	French Guiana
PF	French Polynesia
TF	French Southern and Antarctic Lands
GA	Gabon
GM	Gambia
GE	Georgia
DE	Germany
GH	Ghana
GI	Gibraltar
GR	Greece

Code	Country/Territory
GL	Greenland
GD	Grenada
GP	Guadeloupe
GU	Guam
GT	Guatemala
GN	Guinea
GW	Guinea-Bissau
GY	Guyana
HT	Haiti
HM	Heard Island and McDonald Islands
HN	Honduras
HK	Hong Kong SAR
HU	Hungary
IS	Iceland
IN	India
ID	Indonesia
IR	Iran
IQ	Iraq
IE	Ireland
IL	Israel
IT	Italy
JM	Jamaica
JP	Japan
JO	Jordan
KZ	Kazakhstan
KE	Kenya
SZ	Kingdom of Swaziland
KI	Kiribati
KR	Korea
KW	Kuwait
KG	Kyrgyzstan

Code	Country/Territory
LA	Laos
LV	Latvia
LB	Lebanon
LS	Lesotho
LR	Liberia
LY	Libya
LI	Liechtenstein
LT	Lithuania
LU	Luxembourg
MO	Macao SAR
MK	Macedonia, Former Yugoslav Republic of
MG	Madagascar
MW	Malawi
MY	Malaysia
MV	Maldives
ML	Mali
MT	Malta
MH	Marshall Islands
MQ	Martinique
MR	Mauritania
MU	Mauritius
YT	Mayotte
MX	Mexico
FM	Micronesia
MD	Moldova
MC	Monaco
MN	Mongolia
MS	Montserrat
MA	Morocco
MZ	Mozambique
MM	Myanmar

Code	Country/Territory
NA	Namibia
NR	Nauru
NP	Nepal
NL	Netherlands
AN	Netherlands Antilles
NC	New Caledonia
NZ	New Zealand
NI	Nicaragua
NE	Niger
NG	Nigeria
NU	Niue
NF	Norfolk Island
KP	North Korea
MP	Northern Mariana Islands
NO	Norway
OM	Oman
PK	Pakistan
PW	Palau
PA	Panama
PG	Papua New Guinea
PY	Paraguay
PE	Peru
PH	Philippines
PN	Pitcairn Islands
PL	Poland
PT	Portugal
PR	Puerto Rico
QA	Qatar
RE	Reunion
RO	Romania
RU	Russia

Code	Country/Territory
RW	Rwanda
WS	Samoa
SM	San Marino
ST	São Tomé and Príncipe
SA	Saudi Arabia
SN	Senegal
YU	Serbia and Montenegro
SC	Seychelles
SL	Sierra Leone
SG	Singapore
SK	Slovakia
SI	Slovenia
SB	Solomon Islands
SO	Somalia
ZA	South Africa
GS	South Georgia and the South Sandwich Islands
ES	Spain
LK	Sri Lanka
SH	St. Helena
KN	St. Kitts and Nevis
LC	St. Lucia
PM	St. Pierre and Miquelon
VC	St. Vincent and the Grenadines
SD	Sudan
SR	Suriname
SJ	Svalbard and Jan Mayen
SE	Sweden
CH	Switzerland
SY	Syria
TW	Taiwan

Code	Country/Territory
TJ	Tajikistan
TZ	Tanzania
TH	Thailand
TG	Togo
TK	Tokelau
TO	Tonga
TT	Trinidad and Tobago
TN	Tunisia
TR	Turkey
TM	Turkmenistan
TC	Turks and Caicos Islands
TV	Tuvalu
UG	Uganda
UA	Ukraine
AE	United Arab Emirates
UK	United Kingdom
US	United States
UM	United States Minor Outlying Islands
UY	Uruguay
UZ	Uzbekistan
VU	Vanuatu
VA	Vatican City
VE	Venezuela
VN	Viet Nam
VG	Virgin Islands (British)
VI	Virgin Islands
WF	Wallis and Futuna
YE	Yemen
ZM	Zambia
ZW	Zimbabwe

Get Partner Company

Method: GET

Objective: Provide the ability to get partner company information.

Usage:

1) This will be the GET request.
2) The service URL to be used will be `http://<environment url>ws/rest/service/v1/admin/company?shortname=<urlencoded_shortname>`.
3) If the shortname parameter is not specified, then the URL will retrieve the entire list of partner companies.

Output:

If the service runs successfully, the output will be Status, Message, and Data.

Sample output JSON when shortname parameter is passed


```
{
  "data":
  [
    {
      "support_contactphone":null,
      "elearn_url":null,
      "addresses":
      [
        {
          "zip":"94588",
          "country":"US",
          "city":"Pleasanton",
          "phone":null,
          "addressline3":null,
          "addresstype": 1,
          "addressline2":null,
          "addressline1":"5815 Owens Drive",
          "state":"CA",
          "fax":null
        }
      ],
      "support_emailnotification":null,
      "passwordpolicy":
      {
        "inform_exp":7,
```

```
          "min_specchar":1,
          "max_inactive":360,
          "min_length":6,
          "min_numericchar":1,
          "max_attempts":5,
          "min_alpchar":1,
          "pwd_validfor":180,
          "chk_uname":1,
          "chk_prevpwd":0,
          "max_length":0,
          "chk_flname":1
        },
        "helpurl":null,
        "description":null,
        "support_contactemail":null,
        "shortname":"partner01",
        "url":null,
        "companyname":"Partner Company - 01",
        "elearn_instructions":null,
        "elearn_contactemail":null,
        "support_instructions":null,
        "duns":null,
        "elearn_label":null,
        "status":1
      }
    ],
    "message":
    [
    ],
    "status":200
  }
```


Sample Output for all partner companies


```
  {
    "data":
    [
      {
        "companyname":"Partner Company - 01",
        "shortname":"partner01",
        "status":1
      },
```

```
      {
        "companyname":"Partner Company - 02",
        "shortname":"partner02",
        "status":1
      }
    ],
    "message":
    [
    ],
    "status":200
  }
```

Create Partner Company

Method: POST

Objective: Create partner company based on information provided.

Usage:

This will be the POST request.

The service URL to be used will be `http://<environment url>/ws/rest/service/v1/admin/company`

Input:

The user will be required to enter the company information in JSON format.

Minimum data requirements are the mandatory fields when creating partner company or you can specify detailed data, similar to output of GET request.

Sample JSON to create Partner company

```
  {
   "companyname":"Partner Company - 01",
   "shortname":"partner01",
   "addresses": [{
          "addresstype": 1,
          "addressline1":"San Jose CA",
          "city":"San Jose",
          "state":"CA",
          "zip":"95110",
          "country":“US”
   }],
   "passwordpolicy":{
```

```
            "min_length": 3,
            "max_length": 7,
    }
    }
```

Output:

The output will consist of Status, message.

```
   Sample Output
    Sample output JSON
    {
    "data":
    [
    ],
    "message":
    [
        "The partner company has been created"'
    ],
    "status":200
    }
    Error Handling
    {
    "data": [
    "companyname is mandatory to create partner company",
    "passwordpolicy is mandatory to create partner company",
    "addresses is mandatory to create partner company"
    ],
    "message": [
    "One or more records contain errors."
    ],
    "status": 5555
    }
```

The mandatory existing validations that exist for creating partner company will be applicable in REST service as well.

Validations for creating partner company

Status	Condition	Message
200	Success	The partner company has been created.
900	Mandatory field not specified	<data_element> is mandatory to create partner company
500	Server Error	Server Error, contact the system administrator.
901	Invalid data value	Invalid data for <data_element>.
5555	One or more records contain errors.	One or more records contain errors.

Update Partner Company

Method: PUT

Objective: Provide the ability to update partner company based on information provided.

Usage:

This will be the PUT request.

The service URL to be used will be: `http://<environment url>/ws/rest/service/v1/admin/company`

Input:

Company information in JSON format.

Sample JSON to update Partner company

```
{
"companyname":"Partner Company - 01",
"shortname":"partner01",
"addresses": [{
"addresstype": 1,
"addressline1":"488 Almaden Blvd",
"city":"San Jose",
"state":"CA",
"zip":"95110",
"country":"US"
}],
"passwordpolicy":{
"min_length": 1,
"max_length": 3
}
}
```

Output:

If the service runs successfully, then the return data will be Status and message.

The mandatory existing validations that exist for updating partner company will be applicable in REST service as well

The shortname is the identifier for updating the partner company details.

The other data elements which are not included as part of the update request will retain its value on execution.

Validations for updating partner company

Status	Condition	Message
200	Success	The partner company {partner company name} has been created.
901	Invalid data value	Invalid data for <data_element>.
902	Partner company specified does not exist as shortname specified is not matching.	The partner company does not exist.
5555	One or more records contain errors.	One or more records contain errors.

Update Partner Company Shortname

Method: POST

The Company "shortname" is the identifier.

URL: <unifier_url>/ws/rest/service/v1/admin/company/shortname

Sample Input JSON:

```
{
    "shortname":"partner07",
    "new_shortname":"partner07123"
}
```

Add (Update) Partner Company Shell Membership

Method: PUT

URL: <unifier_url>/ws/rest/service/v1/admin/company/shell/member/add

Objective: Add partner company to a shell based on information provided.

Usage:

This will be a PUT request.

The service URL to be used will be: `http://<environment url>/ws/rest/service/v1/admin/company/shell/member/add`

Input:

Company information in JSON format.

Sample JSON to add member company to a shell

```
{
    "shortname":"partner01",
    "shellnumber":"7896"
}
```

Output:

Return data will be JSON format too.

Validations:

Status	Condition	Message
200	Success	The member company {name} has been added to shell {name}
910	Adding inactive partner company to a given shell.	The inactive partner company {name} cannot be added to shell {name}.
911	Adding member company to an inactive shell.	The partner company {name} cannot be added to inactive shell {name}
902	Partner company specified does not exist as shortname specified is not matching.	The partner company does not exist.
500	Server Error.	Server Error, contact the system administrator.
901	Invalid data value.	Invalid data for <data_element>.
5555	One or more records contain errors.	The partner company does not exist

Remove (Update) Partner Company Shell Membership

Method: PUT

URL: <unifier_url>/ws/rest/service/v1/admin/company/shell/member/remove

Objective: Remove partner company from shell based on information provided.

Usage:

This will be a PUT request.

The service URL to be used will be: `http://<environment url>/ws/rest/service/v1/admin/company/shell/member/remove`

Input:

Company information in JSON format.

Sample JSON to add member company to a shell

```
{
     "shortname":"partner01",
     "shellnumber":"7896"
 }
```

Output:

Return data will be status and message.

Validations:

Status	Condition	Message
200	Success	The member company {name} has been removed from the shell {name}
902	Partner company specified does not exist as shortname specified is not matching.	The partner company does not exist.
602	When shell number is invalid or does not exist.	The shell number is invalid/does not exist.
913	When shell number specified is for inactive shell.	The shell specified is inactive.
500	Server Error.	Server Error, contact the system administrator.
5555	One or more records contain errors.	The partner company does not exist.

User

Get User

Method: POST

This will not return Hosting and Partner company users (same as SOAP web service). The Get User REST is different than the SOAP web service. The REST will return the owner company and partner company users, based on the filter condition.

URL: `<unifier_url>/ws/rest/service/v1/admin/user/get`

Input

For filter condition:

```
{
    "filterCondition":"uuu_user_status=1"
}
```

For Get User call, the input filter condition has to be specified.

Create User

Method: POST

Objective: Create partner/company user based on information provided.

Usage:

This will be POST request.

The service URL to be used will be: `http://<environment url>/ws/rest/service/v1/admin/user`

Input:

The user will be required to enter the company/partner user information.

The JSON input to create owner company or partner company users are similar. The Minimum input is:

```
{
    "copyFromUserPreferenceTemplate": "",
    "users": [
        {
            "uuu_user_loginname": "user010",
            "uuu_user_password": "123123",
            "uuu_user_firstname": "User",
```

```
            "uuu_user_lastname": "010",
            "uuu_user_email": "user010@oracle.com",
            "uuu_user_type": "0",
            "uuu_user_status": "1",
            "uuu_user_dateformat": "0",
            "uuu_user_timezone_pref": "50",
            "uuu_user_company": "unifier"
        }
    ]
}
```

Sample JSON to create Partner user

```
{
  "copyfromuserpreferencetemplate":"92Template1",
  "users":
  [
    {
      "uuu_user_workphone":"1-800-333-8989",
      "uuu_user_name":"Company Administrator",
      "uuu_user_status":"1",
      "uuu_user_email":"userabc@oracle.com",
      "empEmployeeIDTB50":"",
      "uuu_user_dateformat":"0",
      "uuu_user_proxy":"",
      "uuu_user_type":"0",
      "uuu_user_timezone_pref":"50",
      "uuu_user_pager":"",
      "empEmployeeRegHrsDA":"0.0",
      "uuu_user_homephone":"",
      "uuu_user_fax":"",
      "uuu_user_lastname":"Administrator",
      "ugenFlrTB120":"",
      "uemSpace1DPK":"",
      "uuu_user_title":"Administrator",
      "uempCurrLocBldDPK":"",
      "uplRoomTB250":"",
      "empEmployeeManagerTB120":"",
      "uuu_user_mobilephone":"1-650-323-32324",
      "uuu_user_proxy_config":"1",
      "usmUSAssignedDeptPD":"",
      "uSiteDP":"",
```

```
        "uuu_user_loginname":"coadmin",
        "uuu_user_company":"unifier",
        "uuu_user_firstname":"Company",
        "uuu_user_password" : "123"
      }
    ]
  }
```

For creating company user the minimum requirement will be:

Sample JSON to create Company User

```
  {
  "user": {
          "loginname":"abcuser",
          "password":"123",
          "firstname":"ABC",
          "lastname":"User",
          "mobilephone":"951-109-8347",
          "homephone":"951-109-8347",
          "workphone":"951-109-8347",
          "email":"abc@oracle.com",
          "pager":"951-109-8347",
          "fax":"951-109-8347",
          "title":"Lead",
          "date_format":"10",
          "timezone":"50",
          "user_type":"Standard"
  },
  }
```

Output:

If the service runs successfully the output is status and message.

The mandatory existing validations that exist for creating partner/company user will be applicable in REST service as well.

Validations for creating partner company

Status	Condition	Message
200	Success	The partner user has been created.
500	Server Error.	Server Error, contact the system administrator.
5555	One or more records contain errors.	One or more records contain errors.

Update User

Method: PUT

Objective: Update company/partner user based on information provided.

> **Note:** In order to update the user successfully, ensure that the integration user has the proper update permissions (Company Workspace (Admin mode) > User Administration > Integration Users).

Usage:

This will be a PUT request.

The service URL to be used will be: `http://<environment url>/ws/rest/service/v1/admin/user`

Input:

User information in JSON format

Sample JSON to update Partner user

```
{
 "users":
  [
    {
      "uuu_user_workphone":"1-800-333-8989",
      "uuu_user_name":"Company Administrator",
      "uuu_user_status":"1",
      "uuu_user_email":"user123@oracle.com",
      "empEmployeeIDTB50":"",
      "uuu_user_dateformat":"0",
      "uuu_user_proxy":"",
      "uuu_user_type":"0",
      "uuu_user_timezone_pref":"50",
      "uuu_user_pager":"",
      "empEmployeeRegHrsDA":"0.0",
      "uuu_user_homephone":"",
      "uuu_user_fax":"",
      "uuu_user_lastname":"Administrator",
      "ugenFlrTB120":"",
      "uemSpace1DPK":"",
      "uuu_user_title":"Administrator",
      "uempCurrLocBldDPK":"",
```

```
        "uplRoomTB250":"",
        "empEmployeeManagerTB120":"",
        "uuu_user_mobilephone":"1-650-323-32324",
        "uuu_user_proxy_config":"1",
        "usmUSAssignedDeptPD":"",
        "uSiteDP":"",
        "uuu_user_loginname":"coadmin",
        "uuu_user_company":"unifier",
        "uuu_user_firstname":"Company"
        "uuu_user_password" : "123"
      }
    ]
  }
```

Output:

Return data will be JSON format.

- `uuu_user_loginname` will be the identifier to identify if the user can be updated
- `uuu_user_company` will be `URLencoded`

Validations for updating company partner user

Status	Condition	Message
200	Success	The {first name last name} user has been updated.
500	Server Error.	Server Error, contact the system administrator.
5555	One or more records contain errors.	One or more records contain errors.

Update User Shell Membership

Method: PUT

URL: `<unifier_url>/ws/rest/service/v1/admin/user/shell/membership`

Sample input JSON

```
{
    "shellnumber":"State0003",
    "users":[
        { "username":"ConfUser3",
          "status":"Active",
```

```
            "group_add": "G1",
                    "group_remove": "Project Administrator"
                }
        ]
}
```

Notes:

- To update the user successfully, ensure that the integration user has the proper update permissions (Company Workspace (Admin mode) > User Administration > Integration Users).
- Although the system audits the addition or removal of users to or from a shell, it does not audit group membership. Because of this, changes to group membership are not reflected in the Group Audit Log.

Update User Group Membership

Method: PUT

URL: `<unifier_url>/ws/rest/service/v1/admin/user/group/membership`

Sample input JSON

```
[
  {
      "username":"ConfUser9",
       "group_add":"Group_A",
       "group_remove":"new group"
  }
]
```

Notes:

- To update the user successfully, ensure that the integration user has the proper update permissions (Company Workspace (Admin mode) > User Administration > Integration Users).
- Although the system audits the addition or removal of users to or from a shell, it does not audit group membership. Because of this, changes to group membership are not reflected in the Group Audit Log.

User Defined Report (UDR)

Usage:

POST /ws/rest/service/v1/data/udr/get/{project_number}

Purpose:

Get User Defined Report Data in a project/shell based on {project_number} or from Company level if {project_number} is not provided.

Input:

Path Parameter

project_number: Specify the Project/shell number to generate the UDR data; if not provided, then UDR will be generated from Company Level.

UDR information in JSON format

Minimum data requirement is:

```
{
"reportname":"partner01_UDR"
}
```

Method : POST

With project Number (Shell level reports): http://<environment url>/ws/rest/service/v1/data/udr/get /<project-number>

Method : POST

Input:

UDR information in JSON format

Minimum data requirement is:

```
{
"reportname":"partner01_UDR"
}
```

Output:

Return data will be JSON format by default.

Validations

Error Code	Condition	Message
200	Success	Ok
500	Server Error	Server Error. Contact the system administrator.

Passing Values to UDR

To pass parameter for query condition for a UDR:

Sample JSON to pass parameters

```
{
"reportname": "UDR for Request for Bid",
"query": [
{
"label":"Requests for Bid / Title",
"value1":"Standard"
},
{
"label":"Requests for Bid / Title",
"value1":"34",
"value2":"43"
},
{
"label":"Formula_01",
"value1":"100"
},
{
"label":"Formula_02",
"value1":"200"
},
{
"label":"Requests for Bid / Due Date",
"value1":"2018-07-31",
"value2":"5"
},
{
"label":"Requests for Bid / Bid Sponsor",
"value1":"XYZ"
}
]
}
```


Parameter for passing values:

Parameter	Condition
label	This must match the query condition label in the UDR.
Value 1	This will help user to enter value for given query condition.
Value 2	This parameter will help user to enter the secondary value in case of between query

Parameter	Condition
	condition.

Get Templates List

POST /ws/rest/service/v1/cashflow/template/list/{project_number}

Purpose:

Get all list of CashFlow Templates with all curves types defined.

The input JSON shall provide various options to be considered for fetching the data

Input:

All parameters should be URL encoded.

Path Parameter

project_number: (Required) Specify the Project number in which the curve exists.

POST body is a JSON

> **Note:** POST call has input & output both as JSON in the body.

```
{
"options":{
"property_name": "CBS CF"
}
}
```

Supported options properties

"property_name": "CBS CF"

"curve_name": << Name of The Curve>>,

"rollup_status"<<Active><Inactive>>

If rollup_status value provided is other than above mentioned values, then invalid options message will be thrown.

"detail_level"<<Summary CBS>< CBS><Project / Shell><Commitment>>

If detail_levelvalue provided is other than above mentioned values, then invalid options message will be thrown.

"include_curves":<< Yes/ No>> <!-- default is Yes if not provided→>

If include_curves value provided is other than above mentioned values, then invalid options message will be thrown.

If no options provided, then the service will return all templates along with cash flow curves from the project.

Output:

JSON object containing 'status', 'data', 'message'

A message will be present if the status is not 200; otherwise, it will be "success".

Project or Shell Sample


```
{
    "data": [
        {
            "name": "Project Cash Flow - Capital Planning",
            "description": null,
            "rollup_status": "Active",
            "detail_level": "Project / Shell",
            "period_type": "Standard Planning Period",
            "period_name": "Standard Planning Period",
            "period_by": "Month",
            "period_format": "M YYYY",
            "decimal_places": 2,
            "curves": [
                {
                    "name": "Baseline",
                    "type": "Baseline",
                    "distribution": {
                        "type": "auto_profile",
                        "distribution_profile": "S Curve"
                    },
                    "cost": {
                        "type": "cost_sheet",
                        "cost_sheet_column": "Revised Budget"
                    },
                    "schedule": {
                        "type": "manual"
                    }
```

```
},
{
    "name": "Actuals",
    "type": "Spends",
    "cost": {
        "cost_sheet_column": "Spends",
        "type": "cost_sheet"
    }
},
{
    "name": "Forecast",
    "type": "Forecast",
    "distribution": {
        "type": "auto_profile",
        "distribution_profile": "S Curve"
    },
    "cost": {
        "type": "cost_sheet",
        "cost_sheet_column": "Forecast"
    },
    "schedule": {
        "type": "manual"
    },
    "forecast_options": {}
},
{
    "name": "Original Budget",
    "type": "Portfolio Budget",
    "cost": {
        "currency_code": "United States Dollar (USD)",
        "distribut_amount_from": "original"
    }
},
{
```

```
                    "name": "Approved Budget",
                    "type": "Portfolio Budget",
                    "cost": {
                        "currency_code": "United States Dollar (USD)",
                        "distribut_amount_from": "approved"
                    }
                },
                {
                    "name": "Shared Budget",
                    "type": "Portfolio Budget",
                    "cost": {
                        "currency_code": "United States Dollar (USD)",
                        "distribut_amount_from": "shared"
                    }
                }
            ],
            "filters": {
                "filter_option": "all"
            }
    ],
    "message": [
        "success"
    ],
    "status": 200
}
```


Data

If integration interface is defined for BP, then integration form will be used for this service; otherwise, all custom DEs defined in the form will be used.

For update, specify only the DEs to be updated.

Data Format

Input and output data will be in JSON format. Set HTTP header Content-Type as: application/json.

Data Transfer

HTTP request body will be used to send the JSON data.

Multi-part/form-data will be used to handle files.

Event Driven Notification

To integrate Unifier with third-party software seamlessly, the application stores the relevant events in the database and provides an integration end point making those events available to the external application.

All the information that is captured within the **Event Notifications** log, about each event, will be available by way of a REST API: 'GET' (GET /ws/rest/service/v1/event/notification). This API will help you to get all the notification events by using the available filter parameters.

The following data can be pulled about any event:

#	Attribute name/label in Unifier	JSON label
1	project_id	project_id
2	object_prefix	object_prefix
3	Shell Number	shell_number
4	Shell Name	shell_name
5	Object Type	object_type
6	Object Sub-Type	object_subtype
7	Object Name	object_name
8	Record Number	record_no
9	Event Date	event_date
10	WF Step From WF type BPs only	workflow_from
11	WF Step To WF type BPs only	workflow_to
12	WF Action Name WF type BPs only	workflow_action
13	Old Status	old_status
14	New Status	new_status

Get Event Driven Notification

GET /ws/rest/service/v1/event/notification

Purpose:

Get all Notification events based on user configuration/request

Input:

All parameters are optional.

Filter condition example:

"filter":{event_date:"2015-07-04T12:08:56.235",object_type:"Business Process", shell_number:"XTB-100"}

Available filter parameters→ "object_type", "event_date", "object_name", "old_status","new_status", "record_no", "project_id" & "shell_number".

Supported Event Date Format: "2019-11-13T10:42" & with milliseconds "2019-11-13T10:42:19.799"

"max_records": Optional(default 1000 records) -maximum records in the request, if not provided system will return 1000 records.

JSON object containing 'status', 'data', 'message', 'latest_event_date', 'total_records', 'fetched_records'

A message will be present if the status is not 200; otherwise, it will be "success".

Sample Request/Output:


```
{
"data":
     {
     "latest_event_date": "2019-12-05T16:01:04.062",
     "total_records": 2,
     "items": [
               {
                    "workflow_from": "Review",
                    "workflow_action": "To Approver",
                    "workflow_to": "Approve",
                    "object_type": "Business Process",
                    "shell_number": "XTB-100",
                    "object_prefix": "uxsov",
                    "project_id": 1002,
                    "object_name": "SOV-W-100",
                    "record_no": "uxsov-0031",
```

```
                    "event_date": "2019-12-05T11:16:26.918",
                    "object_subtype": "WorkFlow",
                    "old_status": "Rejected",
                    "new_status": "Pending"
               },
               {
                    "workflow_from": null,
                    "workflow_action": null,
                    "workflow_to": null,
                    "object_type": "Business Process",
                    "shell_number": "XTB-100",
                    "object_prefix": "uxnwf1",
                    "project_id": 1002,
                    "object_name": "Commit NWF1",
                    "record_no": "uxnwf1-0004",
                    "event_date": "2019-12-04T08:47:46.994",
                    "object_subtype": null,
                    "old_status": "Pending",
                    "new_status": "Pending"
               }
     ],
     "fetched_records": 2
},
"message": [ "Success"],
"status": 200
}
```


Funding

Get Funds List

GET /ws/rest/service/v1/fund/{project_number}

Purpose:

Get all list of Funds

Input:

All parameters should be URL encoded.

Path Parameter

project_number: specify the project/shell number if you need to get project/shell level fund code. If no value is specified, then company level fund code will be returned in the response.

url parameter -

filter=

{ "category":"All Bond Fund Sources",

"status":"Active"

}

Category filter is the display label of the category and is case sensitive.

One category can only be filter in a single request. Multiple categories filter is not supported.

Output:

JSON object containing 'status', 'data', 'message'

A message will be present if the status is not 200; otherwise, it will be "success".

GetFunds


```
{
  "data":
  [
    {
        "id":3,
        "code":MaintainFund,
        "name":"MaintainFund",
        "category":"Grants",
        "description":"College Maintenance Fund",
        "status":"active"
      },
      {
        "id":4,
        "code":MiscFund,
        "fundname":"MiscFund",
        "fundcategory":"Grants",
        "description":"MiscellaenousFund",
        "status":"active"
```

```
      }
    ]
 ,
  "message":
  [
     "Success"
  ],
  "status":200
}
```

Create Fund

POST /ws/rest/service/v1/fund/{project_number}

Purpose:

Create Fund Codes.

If project number is specified and the fund does not exist at company level, throw Error.

Input:

All parameters should be URL encoded.

Path Parameter

project_number: Specify the project/shell number to create the fund codes from company fund sheet. If no value is specified, then the fund code will be created in company.

POST body is a JSON

Data JSON will be list of fund codes attributes.

> **Note**: POST call has input & output both as JSON in the body

For Company:

Create Fund - Company

```
{"data":[{
        "name":"MiscFund",
        "category":"Grants",
        "description":"Miscellaneous Fund",
         "upermitIssuerURL": "http://google.com test",
      }
]
}
```

Parentid is not accepted for tree mode. If provided, will be ignored.

Output:

JSON object containing 'status', 'data', 'message'

A message will be present if the status is not 200; otherwise, it will be "success".

Create Fund - Company

```
{
    "data": [
       {
         "id":4,
         "code":Fund6,
         "name":"Fund6",
         "category":"Grants",
         "description":"MiscellaenousFund",
         "upermitIssuerURL": "http://google.com test",
         "status":"active"
      }
    ],
    "message":
        [

          { code: "Fund5","status": "1206","message":"Fund Code is
referenced in lineitems"},
          { code: "Fund6","status": "200","message":"success"}
    ],
    "status": 200
}
```

For Projects, the list of fund codes are required to create fund codes.

Create Fund - Project

```
{"data":{
      "codes": ["Fund1","Fund2","Fund3"]
      }
}
```

Output:

JSON object containing 'status', 'data', 'message'

A message will be present if the status is not 200; otherwise, it will be "success".

Create Fund - Project

```
{
    "data": {
         {
            "code": "Fund1",
            "id":31
         }
    },
    "message": [

          { code: "Fund2","status": "1201","message":"Fund Code used
already exists."},
          { code: "Fund1","status": "200","message":"success"}  ,
         { code: "Fund2","status": "1201","message":"Fund Code used
already exists."}
    ],
    "status": 3000
}
```

Multiple fund codes can be created in a single request. For Partial Success/Failure, status will be 3000.

Update Fund

PUT /ws/rest/service/v1/fund/

Purpose:

Update company fund code attributes.

Input:

All parameters should be URL encoded.

POST body is a JSON. Data will be list of fund code attributes to be updated at company level

> **Note**: POST call has input & output both as JSON in the body.

Update Fund

```
{"data":[{
```

```
        "code":"MiscFund",
        "category":"Grants",
        "description":"Miscellaneous Fund"
      }
]
}
```

Code, Name, ID, Status and orderid cannot be updated. If provided, they will be ignored.

Output:

JSON object containing 'status', 'data', 'message'

A message will be present if the status is not 200; otherwise, it will be "success".

Update Fund

```
{
    "data": [
          {
                "id":4,
                "code":MiscFund,
                "name":"MiscFund",
                "category":"Grants",
                "description":"MiscellaenousFund",
                "status":"active"
      }
    ],
    "message":
        [
          { code: "MiscFund","status": "200","message":"success"}
    ],
    "status": 200
}
```

Multiple fund codes can be updated in a single request.

Delete Fund

DELETE /ws/rest/service/v1/fund/{project_number}

Purpose:

Deletes Fund codes

Input:

All parameters should be URL encoded.

Path Parameter

project_number: Specify the project/shell number in which fund ids exists. If no value is specified, then the fund ids will be deleted from company.

Path Parameter

Both input & output in JSON format in the body

Delete Fund

```
{
"data":{
"codes": ["Fund9","Fund5","Fund6"]
}
}
```

Output:

JSON object containing 'status', 'data', 'message'

Status codes are:

1> 200 OK, if all creation succeeds.

2> 3000, If any of records creation fail.

For Partial failure, relevant message will be displayed to the fund code.

Delete Fund

```
{
    "data": {
    },
    "message": [
          { code: "Fund5","status": "1206","message":"Fund Code is
referenced in lineitems"},
          { code: ""Fund6"","status": "200","message":"success"}  ,
          { code: "Fund9","status": "1201","message":"Fund Code do not
exist"}
    ],
    "status": 3000
}
```

Manual Fund Consumption

POST /ws/rest/service/v1/fund/consumption/{project_number}

Purpose:

This API is used to perform the manual fund consumption on a record that is either in terminal state or non-terminal state. In case of transient state, this service can be used at both view only or action form of the BP.

Notes:

- Commitment funding is not supported by this service.
- Will support remove and replace of fund similar to UI.
- The uDesigner settings regarding funding option will also be validated as part of the service.
- All the BP records will be processed even if there are any failures in one of the record. Within the BP records all the line items will be processed. Failed record and line items will be reported in the response.
- The order of processing of the lineitem will be based on li_num value.
- This service will not roll up the amount to the fund sheet. Use update BP service or from UI when the BP is sent to next step or finish editing in case of Non workflow BP then the amount will be rolled up to the fund sheet.
- The integration user should have "Full Access" or "Update" permission under "Business Process Services" to run this service.

Input:

All parameters should be URL encoded.

Path Parameter

project_number(Required): Specify the project/shell number of the funding sheet.

POST body contains the JSON object with array of BP assignments.

"data" is a JSON array which can have one or more BP records fund consumption data.

"bpname" (Required): Name of the BP corresponding to the BP record.

"record_no" (Required): The BP record number for which the fund consumption has to be processed.

"funds" is a JSON array which contains one or more fund consumption details.

"code" (Required) : Specify the fund code associated with project/shell or CBS.

"amount" (Required) : Datatype is Double. Specify the assignment value to be consumed from the fund.

"_bp_lineitems" : JSON Array to specify the BP lineitems. Required for "Project Level - Manual(Assign by BP Line Item)" and "CBS Level - Manual" assignment setting.

"li_num" (Required) : Use the "li_num" in "_bp_lineitems" from the response to "GET /ws/rest/service/v1/bp/record/" REST call with lineitem":"yes" as part of the request.

"uuu_tab_id" (Required) : Use the "uuu_tab_id" in"_bp_lineitems" from the response to "GET /ws/rest/service/v1/bp/record/" REST call with lineitem":"yes" as part of the request.

"group_id" (Required if lineitem has group else optional) : Use the "group_id" in"_bp_lineitems" from the response to "GET /ws/rest/service/v1/bp/record/" REST call with lineitem":"yes" as part of the request.

Sample Input Request

//Spends BP data is an example for Project Level - Manual(Assign by BP Record Total) assignment and //Payments BP data is an example for Manual (Assign by BP Line Item)" and "CBS Level - Manual" assignment.

```
{
   "data":[
      {
         "bpname":"Spends",
         "record_no":"uxsp-001",
         "funds":[
            {
               "code":"grants",
               "amount":300.25
            },
            {
               "code":"bonds",
               "amount":750.30
            }
         ]
      },
      {
         "bpname":"Payments",
         "record_no":"uxpa-001",
         "_bp_lineitems":[
            {
```

```
      "uuu_tab_id":"List of Contacts",
      "li_num":1,
      "group_id":60,
      "funds":[
         {
            "code":"grants",
            "amount":250.80
         },
         {
            "code":"bonds",
            "amount":750.40
         }
      ]
   },
   {
      "uuu_tab_id":"List of Contacts",
      "li_num":2,
      "group_id":60,
      "funds":[
         {
            "code":"grants",
            "amount":250.40
         },
         {
            "code":"bonds",
            "amount":750.16
         }
      ]
   },
   {
      "uuu_tab_id":"List of Contacts",
      "li_num":3,
      "group_id":60,
      "funds":[
```

```
                {
                   "code":"federal",
                   "amount":650.45
                }
             ]
          }
       ]
    }
]
}
```

Output:

JSON object containing 'status', 'data', 'message'

"data" will be empty in the response.

"message" This will be an array of JSON object containing

"record_no" and "status". This will "success" or error message for the failure.

"status" contains:

- 200 when all the record's fund consumption completed successfully and
- 3000 if any one record fund consumption has failed.

Sample Output Response

```
{
   "data":[
      {
         "record_no":"uxsp-001",
         "fund_consumed":500.0
      },
      {
         "record_no":"uxpa-001",
         "_bp_lineitems":[
            {
               "uuu_tab_id":"List of Contacts",
               "li_num":1,
               "cbs_code":"1_D_D",
               "fund_consumed":500.0
            },
```

```
            {
               "uuu_tab_id":"List of Contacts",
               "li_num":2,
               "cbs_code":"2_D_D",
               "fund_consumed":450.0
            }
         ]
      }
   ],
   "message":[
      {
         "record_no":"uxsp-001",
         "funds":[
            {
               "code":"grants",
               "status":1214,
               "message":"Fund assignment amount is required."
            },
            {
               "code":"bonds",
               "status":200,
               "message":"Success"
            }
         ]
      },
      {
         "record_no":"uxpa-001",
         "_bp_lineitems":[
            {
               "uuu_tab_id":"List of Contacts",
               "li_num":1,
               "funds":[
                  {
                     "code":"grants",
```

```
                    "status":1214,
                    "message":"Fund assignment amount is required."
                 },
                 {
                    "code":"bonds",
                    "status":200,
                    "message":"Success"
                 }
              ]
           },
           {
              "uuu_tab_id":"List of Contacts",
              "li_num":2,
              "funds":[
                 {
                    "code":"grants",
                    "status":200,
                    "message":"Success"
                 },
                 {
                    "code":"bonds",
                    "status":200,
                    "message":"Success"
                 }
              ]
           }
        ]
     }
  ],
  "status":3000
}
```

Get Fund Columns

GET /ws/rest/service/v1/fund/column/{project_number}

Purpose:

Get the funding column data. This API can be used to get the fund balance as user can use a formula column to calculate the balance.

Input:

All parameters should be URL encoded.

Path Parameter

project_number(Optional): Specify the project/shell number to get the project/shell funding data or empty to get the company data.

url parameter -

filter=

{

"column_names":["Manual Funding by Project" ,"Project Funding"],

"codes":["Fund0","Fund1","Fund2"]

}

Notes:

- Filter can be used to filter on column name and the fund code to get the data.
- For funding sheets with tree as display mode, if parent fund code is given in filter condition, then error will be thrown.
- If with given filter column name, multiple columns exists in the funding sheet then validation error will be thrown.

Output:

JSON object containing 'status', 'data', 'message'

Note: If there are no columns defined in the fund sheet then the service will return an empty data array in the response.

Sample Response

```
{
  "data":[
     {
        "Project Funding":{
        "Data Source" : "Project_Funding",
        "Funds":{
```

```
                  "fund0":101.00,
                  "fund1":100.2,
                  "fund2":100.3
               }
         }
      },
      {
         "Manual Funding by Project":{
         "Data Source" : "Manual_Funding",
         "Funds":{
                  "fund0":101.00,
                  "fund1":100.2,
                  "fund2":100.3
               }
         }
      }
   ],
   "message":[
      "success"
   ],
   "status":"200"
}
```


Partial get is not allowed; that is, if one of the filter conditions fails, only an error message will be returned.

Get Fund Assignment Order

GET /ws/rest/service/v1/fund/order/{project_number}

Purpose:

Get Fund Order

Input:

All parameters should be URL encoded.

Path Parameter

project_number(Required): Specify the project/shell number of the funding sheet.

Output:

JSON object containing 'status', 'data', 'message'

Status	Message	Condition
200	success	If all the data is retrieved in the response
500	exception message	If there is any exception when running this service
1240	Request is valid for Shell or Project.	
1207	Funding sheet do not exist.	If shell does not have funding sheet

Get Fund Order

```
{
   "data": [{
     "code_order": ["f1001", "f1002", "f1003"]
      }],
"message": [
        "success"
    ],
    "status": 200
}
```

Get Fund Assignment Order for Cost Sheet

GET /ws/rest/service/v1/cost/fund/order/{project_number}

Purpose:

Get Fund Order

Input:

All parameters should be URL encoded.

Path Parameter

project_number(Required): Specify the project/shell number of the funding sheet

optional url parameter -

```
filter=
{
"cbs_codes":["code1" ,"code2"]
}
```

If cbs_codes in filter do not have fund assigned to them, then empty code_order List will return in response for those cbs_codes.

When filter is not provided, then only those cbs_codes which have fund assigned to them will return in response.

Output:

JSON object containing 'status', 'data', 'message'

Status	Message	Condition
200	success	If all the data is retrieved in the response
500	exception message	If there is any exception when running this service
1240	Request is valid for Shell or Project.	
1207	Funding sheet do not exist.	If shell does not have funding Sheet
707	Cost sheet does not exist.	If shell does not have Cost Sheet

Get Fund Order

Without filter condition: response contains only those cbs_codes which have fund assigned.

```
{
   "data": [{
            "cbs_code": "cost_code_1",
            "code_order": ["f1001", "f1002", "f1003"]
        },
        {
            "cbs_code": "cost_code_2",
            "code_order": ["f1002", "f1004", "f1003"]
        }
 ],
"message": [
        "success"
    ],
    "status": 200
}
```

With filter condition: returns empty code_order List for "cost_code_3". It does not have fund assigned.


```
{
   "data": [{
            "cbs_code": "cost_code_1",
            "code_order": ["f1001", "f1002", "f1003"]
        },
        {
            "cbs_code": "cost_code_2",
            "code_order": ["f1002", "f1004", "f1003"]
        },
        {
            "cbs_code": "cost_code_3",
            "code_order": []
        }
 ],
"message": [
        "success"
    ],
    "status": 200
}
```


Update Fund Assignment Order

PUT /ws/rest/service/v1/fund/order/{project_number}

Purpose:

Fund ordering to be used for fund assignment when auto order rule is specified for the business process. this API will allow user to change the fund order in the project/shell funding sheet.

Input:

All parameters should be URL encoded.

Path Parameter

project_number(Required): Specify the project/shell number of the funding sheet.

POST body (JSON)

The data object will contain all the fund codes listed in order.

Order Fund Codes

Sample Input

```
{
    "data": [{
        "code_order": ["1001", "1002", "1003"]
    }]
}
```

Output:

JSON object containing 'status', 'data', 'message'

Status	Message	Condition
200	success	If all the data is retrieved in the response

Sample Output

```
{
    "data": [{
        "code_order": ["1001", "1002", "1003"]
    }]
,
"message": [
        "success"
    ],
    "status": 200
}
```

Output:

JSON object containing 'status', 'data', 'message'

If update for one code fails, all the changes will be rolled back.

Update Fund Assignment Order for Cost Sheet

This PUT /ws/rest/service/v1/cost/fund/order/{project_number}

Purpose:

Fund ordering to be used for fund assignment when auto order rule is specified for the business process. this API will allow user to change the fund order in the project/shell funding sheet.

Input:

All parameters should be URL encoded.

Path Parameter

project_number(Required): Specify the project/shell number of the funding sheet.

POST body (JSON)

The data object will contain the list of all fund codes for a given cbs code listed in order.

Order Fund Codes by CBS codes

Sample Input

```
{
   "data": [
        {
            "cbs_code": "00000~~00500",
            "code_order": ["f1001", "f1002", "f1003"]
        },
        {
            "cbs_code": "00000~~005001",
            "code_order": ["f1002", "f1004", "f1003"]
        }
   ]
}
```

Output:

JSON object containing 'status', 'data', 'message'

Sample Output

```
{
    "data": [{
            "cbs_code": "00000~~00500",
            "code_order": ["f1001", "f1002", "f1003"]
        }
    ],
    "message": [  {
            "code": "00000~~005001",
            "message": "CBS Code is invalid.",
            "status": 1241
        },
        {
```

```
            "code": "00000~~00500",
            "message": "success",
            "status": 200
        }
    ],
    "status": 3000
}
```

Partial update is allowed.

Update Fund Status

PUT /ws/rest/service/v1/fund/status/{project_number}

Purpose:

API will allow user to change the fund status in the project/shell funding sheet.

Input:

All parameters should be URL encoded.

Path Parameter

project_number(Optional): Specify the project/shell number of the funding sheet. If not specified, will update company fund codes.

POST body (JSON)

The data object will have fund ids and the status to be updated to. It will take the id as the key and the status as value.

Sample input request

```
{
   "data": [
        {"code":"1001","status":"Active"},
        {"code":"1002","status":"Open"},
        {"code":"1003","status":"Inactive"}
   ]
}
```

Output:

JSON object containing 'status', 'data', 'message'

Update Status

```
{
    "data": [
```

```
        {
            "code": "1003",
            "status": "Inactive"
        }
    ],
    "message": [
        {
            "code": "1001",
            "message": "Fund Code do not exist.",
            "status": "1203"
        },
        {
            "code": "1002",
            "message": "Status field value is not correct.",
            "status": "663"
        },
        {
            "code": "1003",
            "message": "success",
            "status": "200"
        }
    ],
    "status": 3000
}
```


Partial update is allowed.

Get Fund Consumption for CBS Level SOV (Auto-Order / Auto-Ratio)

GET /ws/rest/service/v1/fund/sov/consumption/{project_number}

Purpose:

To Fetch assigned Funds to CBS in SOV of types "General Spends" & "Payment Applications".

Input Parameter:

All parameters should be URL encoded.

Both input & output in JSON format.

Get Fund Consumption for CBS Level SOV input JSON

```
filter = {
    "commit_bp_name" : ["bp_name"],
    "record_no" : ["base_record_no"],
    "cbs_code" : ["100~~101"],
    "item#" : [1234],
    "sov_type" : "General Spends",
    "assignment_type": "SOV Auto-Order"
}
```

If a filter is not provided, then all SOVs (from "General Spends" & "Payment Applications") will be fetched. If a filter is provided, then the "AND" condition is seen.

Filter condition key definitions

Key	Definition
commit_bp_name	Optional. The commit_bp_name references those BPs that have SOV Auto-Order, or SOV Auto-Ratio, fund assignment selected in Funding Sheet properties. One or more inputs are supported in filter .
record_no	Optional. The base record number of the SOV sheet. One or more inputs are supported in filter . The record_no supports '%' wildcard character to filter record_no. For example: The "record_no" : "PO-001%", will fetch SOV details for all the records starting with "PO-001".
cbs_code	Optional. The CBS code to which the fund is assigned. One or more inputs are supported in filter.
item#	Optional. Uniquely identifiable row number "item#" in the SOV sheet. One or more inputs are supported in filter.
sov_type	Optional. Only one value is supported at a time in

Key	Definition
	the filter: General Spends" or "Payment Applications".
assignment_type	Optional. Only one value is supported at a time in the filter: "SOV Auto-Order" or "SOV Auto-Ratio".

Output:

JSON object containing 'status', 'data', 'message'

Get Fund Consumption for CBS Level SOV output JSON


```
{
  "data": {
    "Purchase Orders": {
      "sov_type": "General Spends",
      "assignment_type": "SOV Auto-Ratio",
      "record_no": {
        "PO-0002": {
          "rows": [
            {
              "item#": "000010",
              "cbs_code": "100~~101",
              "fund_assignment": [
                {
                  "fund_code": "funding",
                  "fund_ratio": "40",
                  "status" : "Active"
                },
                {
                  "fund_code": "State Funding",
                  "fund_ratio": "0",
                  "status" : "Inactive"
                },
```

```
            {
              "fund_code": "Federal Funding",
              "fund_ratio": "60",
              "status" : "Active"
            }
          ]
        },
        {
          "item#": "000020",
          "cbs_code": "100~~102",
          "fund_assignment": [
            {
              "fund_code": "State Funding",
              "fund_ratio": "100",
              "status" : "Active"
            }
          ]
        },
        {
          "item#": "000030",
          "cbs_code": "100~~102",
          "fund_assignment": []
        },
        {
          "item#": "000040",
          "cbs_code": "300~~302",
          "fund_assignment": []
        }
      ]
    },
    "PO-0001": {
      "rows": [
        {
          "item#": "000010",
```

```
          "cbs_code": "100~~101",
          "fund_assignment": [
            {
              "fund_code": "funding",
              "fund_ratio": "100",
              "status" : "Active"
            }
          ]
        }
      ]
    }
  }
},
,
"Group_by_CBS_base_commit_bp": {
  "sov_type": "General Spends",
  "assignment_type": "SOV Auto-Order",
  "record_no": {
    "uxfund20-0000": {
      "rows": [
        {
          "item#": "000010",
          "cbs_code": "100~~101",
          "fund_assignment": [
            {
                "fund_code" : "funding",
                "status" : "Active"
            },
            {
                "fund_code" : "State Funding",
                "status" : "Active"
            }
            {
                "fund_code" : "Federal Funding",
```

```
                    "status" : "Active"
                  }
                ]
              }
            ]
          }
        }
      },
      "SM Cost PG Commit WF": {
        "sov_type": "Payment Applications",
        "assignment_type": "SOV Auto-Order",
        "record_no": {
          "uxfund4-0001": {
            "rows": [
              {
                "item#": "000010",
                "cbs_code": "100~~101",
                "fund_assignment": [
                      {
                          "fund_code" : "funding",
                          "status" : "Active"
                      }
                ]
              }
            ]
          }
        }
      }
    },
    "message": [
      "Success"
    ],
    "status": 200
}
```

Notes:

- To perform this call, the Integration user need to have the "Cost CBS Services > Get" permission (under "User Administration in Company Admin mode").
- Only the SOV sheets with "Fund Assignment" enabled (in the sheets) will be fetched as part of GET SOV consumption call.
- The SOV sheets that are funded from Commit Fund Sheet will not get fetched from this GET call.
- From the SOV sheet, the Summary rows will not be fetched. Only the rows with Cost code assigned to them (normal rows or breakdown of summary row) will be fetched in GET call.

Status codes are:

1>200, for success

Update Fund Consumption for CBS Level SOV (Auto-Order / Auto-Ratio)

PUT /ws/rest/service/v1/fund/sov/consumption/{project_number}

Purpose:

To assign Funds to CBS in SOV of types "General Spends" & "Payment Applications".

Input:

All parameters should be URL encoded.

Both input & output in JSON format in the body.

Fund Consumption for CBS Level SOV input JSON

SOV Auto-Ratio

```
{
   "data":{
      "Purchase Orders" ( commit_bp_name ):{
         "sov_type":"General Spends", ( optional )
         "assignment_type":"SOV Auto-Ratio", ( optional )
         "record_no":{
            "PO-0002" ( SOV base record number ):{
               "rows":[
                  {
                     "item#":"000010",
                     "cbs_code":"100~~101", ( optional )
                     "fund_assignment":[
```

```
                {
                   "fund_code":"funding",
                   "fund_ratio":"40",
                   "status" : "Active" ( optional )
                },
                {
                   "fund_code":"State Funding",
                   "fund_ratio":"0"
                   "status" : "Active"
                },
                {
                   "fund_code":"Federal Funding",
                   "fund_ratio":"60"
                }
             ]
          },
          {
             "item#":"000020.00001",
             "breakdown" : "BD1",
             "cbs_code":"100~~102",
             "fund_assignment":[
                {
                   "fund_code":"State Funding",
                   "fund_ratio":"100"
                }
             ]
          }
       ]
    },
    "PO-0001":{
       "rows":[
          {
             "item#":"000010",
             "cbs_code":"100~~101",
```

```
                    "fund_assignment":[
                       {
                          "fund_code":"funding",
                          "fund_ratio":"100"
                       }
                    ]
                 }
              ]
           }
        }
     }
  }
}
```

SOV Auto-Order (fund_assignment can be provided in two ways):

1)

```
  {
      "data":{
        "Group_by_CBS_base_commit_bp" ( commit_bp_name ): {
          "sov_type": "General Spends",
          "assignment_type": "SOV Auto-Order",
          "record_no": {
              "uxfund20-0000" ( SOV base record number ): {
              "rows": [
                  {
                  "item#": "000010",
                  "cbs_code": "100~~101",
                  "fund_assignment": [
                      "funding",
                      "State Funding",
                      "Federal Funding"
                  ]
                  }
              ]
              }
          }
        }
     }
```

```
   }
```

2)

```
   {
       "data":{
           "Group_by_CBS_base_commit_bp": {
               "sov_type": "General Spends",
               "assignment_type": "SOV Auto-Order",
               "record_no": {
                   "uxfund20-0000": {
                       "rows": [
                           {
                               "item#": "000010",
                               "cbs_code": "100~~101",
                               "fund_assignment": [
                                   {
                                       "fund_code" : "funding"
                                   },
                                   {
                                       "fund_code" : "State Funding"
                                   },
                                   {
                                       "fund_code" : "Federal Funding"
                                   }
                               ]
                           }
                       ]
                   }
               }
           }
       }
   }
```

Notes:

- The "item#" is mandatory, to uniquely identify row to be updated, in SOV sheet.
- For SOV Auto-Order, if only one fund_code is provided in input without fund_ratio, then default 100% will be applied to that fund_code.
- SOV sheets configured to be funded from Commit Fund Sheet, will not get updated from this update call.
- To perform this call, the Integration user needs to have the "Cost CBS Services > Get" permission (under "User Administration in Company Admin mode").
- The update operation supports only one Commitment Business process in Input.
- Only the SOV sheets with "Fund Assignment" enabled (in the sheets) will be updated.
- In the SOV sheet, only the rows that have Cost code assigned to them are provided in input JASON.
- If a row is divided in breakdowns, then both the "item#" and the "breakdown" values must be provided for identification in order for the row to be updated. For the SOV Auto-Order, if only one fund_code is provided in input, without fund_ratio, then the default value of 100% will be applied to that fund_code.
- The SOV sheets that have been configured to be funded from the Commit Fund Sheet will not get updated from this update call.

Output:

JSON object containing 'status', 'data', 'message'

Response message contains key as "<record_no>/<item#>/<breakdown, if present>

And "item_status", "item_message" contains individual response for that row in SOV record.

Fund Consumption for CBS Level SOV output JSON

SOV Auto-Ratio

```
{
   "data":[
   ],
   "message":[
      {
         "PO-0002/000010" :
        {
                "item_status":200,
```

```
                "item_message":"success"
        }
        "PO-0002/000020.00001/BD1" :
        {
                "item_status":200,
                "item_message":"success"
        },
        "PO-0001/000010" :
        {
                "item_status":200,
                "item_message":"success"
         }
      }
   ],
   "status":200
}
```


SOV Auto-Order


```
{
   "data":[
   ],
   "message":[
      {
         "uxfund20-0000/000010" :
        {
                  "item_status":200,
                  "item_message":"success"
        }
      }
   ],
   "status":200
}
```


Status codes are:

1>200, for success

2> 3000, for Partial success.

Response Error Codes (Funding REST API Details)

Code	Message	Details
200	success	If the request is successful
500	Server Error, contact the system administrator.	If there is any exception when running this service
505	token+" is not present, it is required in the formula:"+value+" for field "+name	If the data provided is not correct like pull down with a label which does not exist.
602	Project/Shell Number is not correct	project number is incorrect or does not exist
603	Business Process Name is not correct	"bpname" is not specified in the input JSON and or is invalid value
651	CBS Code is not present.	"cbs_code" is not present in the input JSON
657	Invalid record_no.	"record_no" value is not specified in the input JSON or is invalid value.
663	Status field value is not correct.	If status value is not valid; that is, it is neither active nor inactive
701	Invalid Column Name	If column name given in the filter condition does not belong to funding sheet
707	Cost sheet does not exist.	If shell does not have Cost Sheet
811	Invalid Filter Condition.	
859	This record is already terminated.	When BP specified in the input JSON is terminated.
1101	Empty or Invalid JSON data.	Input request JSON is invalid
1202	Fund Code cannot be deleted as child funds exist.	
1203	Fund Code do not exist.	If the input fund code does not belong to project funding sheet or configured in cost sheet for CBS

Code	Message	Details
1204	Fund Code is referenced in lineitems.	Fund Code is referenced in lineitems and has data.
1205	Fund Code has funds allocated manually.	
1206	This operation cannot be performed on Root/Unassigned/Parent Fund Code	
1207	Funding sheet do not exist	project fund sheet is not defined
1208	Fund Code is not valid.	
1209	Fund Code is required	When input JSON did not contain "code" parameter in "funds" array.
1210	Only manual funding assignment rule is supported	if the assignment rule for BP is not set for manual funding or it is a commitment funding BP.
1211	Only General Spends, Payment Application or Generic Cost BP are supported	BP name specified in the input is not a spends, payment or generic cost BP type
1212	code not present in input request	
1213		If Fund status is inactive
1214	Fund assignment amount is required.	
1215	Business Process line item is required.	"_bp_lineitems" is not specified in the input JSON for lineitem or CBS assignment
1216	li_num is not present	"li_num" is not present in the input JSON
1217	li_num is Invalid.	"li_num" has invalid value like not a number or it does not belong to the BP lineitem
1218	Invalid CBS Code for	For CBS manual

Code	Message	Details
	lineitem.	assignment rule the "cbs_code" and "li_num" values in input JSON does not match
1219	Project status is Inactive.	
1220	Fund code cannot be empty	
1221	Consumption cannot be done on a negative fund balance	When the fund balance is negative
1222	Amount cannot be greater than fund balance	When input amount is greater than available fund balance
1223	Amount must be between	validation message based on the input amount and total fund amount and other values
1224	Amount cannot be greater than unassigned amount	Input amount is greater than unassigned amount
1225	Total amount must be between	Input amount is less or greater than the lineitem or record amount
1226	Funds are not provided for consumption.	"funds" array is not specified in the input JSON or it is empty
1227	Fund consumption is not allowed.	If funding option is disabled in uDesigner settings.
1228	Fund Code is used in Projects.	
1229	Fund amount is required.	"amount" value is not specified in the input JSON
1230	Fund amount is invalid.	"amount" value is invalid in input JSON
1231	Separator cannot be included in the value.	
1232	Fund consumption failed.	When there is an exception or error when processing the fund consumption
1233	No Fund Codes are assigned to CBS for this	If the CBS code provided in the input JSON does not

Code	Message	Details
	lineitem	have any fund code associated with it.
1234	Fund Code is not assigned to this CBS	If Fund Code is not assigned to CBS
1235	Multiple Fund Columns with same name exists	If multiple columns of a fund sheet exists with same column name.
1236	Tab name is invalid.	tab name specified in uuu_tab_id parameter is not a valid value.
1237	Fund codes specified in the given project are not valid:	Fund codes specified are in valid.
1238	All the fund codes in the project are not specified.	All the fund codes in the project are not specified.
1239	Fund Code specified is duplicate:	Fund code specified is duplicate
1409	Invalid fund_assignment.	
1410	Invalid funds: <fund names >	
1411	Inactive funds: <fund names>	
1412	Invalid fund_ratio : <input value>	
1413	Sum of fund_ratio is not 100% : < total value >	
1414	Invalid item# or breakdown.	
1415	Fund Assignment not enabled.	
1416	Invalid Commitment Business process.	
1240	Request is valid for Shell or Project.	Request is valid for Shell or Project.
1241	CBS Code is invalid.	CBS Code is invalid.
1242	All the fund codes in the cbs code are not specified.	All the fund codes assigned in the cbs code are not specified.
1243	Fund consumption cannot	Fund consumption is

Code	Message	Details
	be performed when the project/shell status is Inactive or View-Only or On-Hold.	allowed only active project/shell status.
1244	Invalid Fund Category, Please provide correct Category.	Provide correct Category.
1245	Update cannot be performed when project/shell status is Inactive or View-Only or On-Hold.	
1246	group_id is Invalid.	group_id value specified in fund consumption call for lineitems is invalid.
1247	group_id is required.	group_id value is required for lineitem BP with groups when invoking the fund consumption call.
3000	Partial failure.	Partial failure of REST service
3002	Invalid input	If input JSON did not contain the "data" parameter
3002	Only one business process is supported.	
3002	No data in input JSON.	
3003	Business Process is not Active.	When fund consumption is performed on an inactive BP.

Non-Workflow BP Permissions

Note: Ensure that the integration user has the required Business Process Permissions.

Get BP Records Permission

POST /ws/rest/service/v1/bp/record/permission/list/{project_number}

Purpose:

Get non-workflow records permission (in user mode) of a specific BP in a shell based on shell number or from Company level if project/shell number is not provided.

The input JSON shall provide various options to be considered for fetching the data.

Input:

All parameters should be URL encoded.

Path Parameter

project_number: Specify the Project number in which the records exists; if not provided, then records are considered to be fetched from Company Level.

POST body is a JSON

> **Note**: POST call has input & output both as JSON in the body.

For one or more records

```
{
   "bpname" : "Vendors",
   "record_no" : ["VEN-0023","VEN-0024"],
    "filter_condition" : "status=Active"
}
```

For only one record

```
{
   "bpname" : "Vendors",
   "record_no" : "VEN-0023",
    "filter_condition" : "status=Inactive"
}
```

"bpname" is mandatory input parameter.

In the request body record_no can be provided in below two formats:

1. "record_no": ["VEN-0023","VEN-0024"] For one or more records.

2. "record_no": "VEN-0023" For only one record.

"record_no" is optional. If no value is specified, then all the BP record permission will be returned.

"filter_condition" is optional parameter and filter is supported only on "status" field. It will be "AND" condition between "record_no" & "filter_condition".

Output:

JSON object containing 'status', 'data', 'message'

Message will be present if status is not 200; otherwise, it will be "success".

Get BP Permission Sample Response


```
{
    "data": {
        "VEN-0024": {
            "record_status": "Active",
            "permissions": [
                {
                    "login_name": "coadmin",
                    "full_name": "Company Administrator",
                    "permission": {
                        "edit_data": "1",
                        "view": "1",
                        "modify_permission": "0"
                    },
                    "type": "U"
                },
                {
                    "full_name": "Space Planners",
                    "group_name": "Space Planners",
                    "permission": {
                        "edit_data": "1",
                        "view": "1",
                        "modify_permission": "1"
                    },
                    "type": "CG"
                }
            ]
        },
        "VEN-0023": {
            "record_status": "Terminated",
            "permissions": [
                {
                    "login_name": "coadmin",
```

```
                    "full_name": "Company Administrator",
                    "permission": {
                        "edit_data": "1",
                        "view": "1",
                        "modify_permission": "1"
                    },
                    "type": "U"
                }
            ]
        }
    },
    "message": [
        "success"
    ],
    "status": 200
}
```


Update/Modify BP Records Permission

PUT /ws/rest/service/v1/bp/record/permission/{project_number}

Purpose:

Update non-workflow records permission (in user mode) of a specific BP in a shell based on shell number or from Company level if project/shell number is not provided.

The input JSON shall provide various options to be considered for fetching the data

Input:

All parameters should be URL encoded.

Path Parameter

project_number: Specify the Project number in which the records exists; if not provided, then records are considered to be fetched from Company Level.

POST body is a JSON

> **Note**: POST call has input & output both as JSON in the body.


```
{
    "options":{
        "bpname" : "simple1"
```

```
    },
    "data": {
        "record_no": ["uxss1-0007", "uxss1-0006", "uxss1-0005"]
        "permissions": [
                {
                    "login_name": "coadmin",
                    "type": "U",
                    "full_name": "Company Administrator",
                    "permission": {
                        "edit_data": "1",
                        "modify_permission": "0",
                        "view": "1"
                    }
                }
                {
                    "full_name": "Building Managers",
                    "group_name": "Building Managers",
                    "permission": {
                        "edit_data": "1",
                        "view": "1",
                        "modify_permission": "0"
                    },
                    "type": "PG"
                }
            ]
        }
}
```

Here "bpname" & "record_no" are mandatory in options.

In the request body record_no can be provided in below two formats

1. "record_no": ["uxss1-0007", "uxss1-0006", "uxss1-0005"] For one or more records.

2. "record_no": "uxss1-0007" For only one record.

If record_no not provided, then error response will be provided to user to provide record_number.

Output:

JSON object containing 'status', 'data', 'message'

Message will be present if status is not 200; otherwise, it will be "success".

Update/Modify BP Records Permission Sample Response


```
{
    "data": {
        "uxss1-0007": {
            "record_status": "Active",
            "permissions": [
                {
                    "login_name": "firstname",
                    "full_name": "Firstname Lastname",
                    "permission": {
                        "edit_data": "1",
                        "view": "1",
                        "modify_permission": "1"
                    },
                    "type": "U"
                },
                {
                    "login_name": "coadmin",
                    "full_name": "Company Administrator",
                    "permission": {
                        "edit_data": "1",
                        "view": "1",
                        "modify_permission": "0"
                    },
                    "type": "U"
                },
                {
                    "full_name": "Building Managers",
                    "group_name": "Building Managers",
                    "permission": {
                        "edit_data": "1",
```

```
                "view": "1",
                "modify_permission": "0"
            },
            "type": "PG"
        }
    ],
    "updated_users": [
        "coadmin"
    ],
    "updated_groups": [
        "Building Managers"
    ]
},
"uxss1-0005": {
    "record_status": "Terminated",
    "permissions": [
        {
            "login_name": "coadmin",
            "full_name": "Company Administrator",
            "permission": {
                "edit_data": "1",
                "view": "1",
                "modify_permission": "1"
            },
            "type": "U"
        }
    ],
    "updated_users": [],
    "updated_groups": []
},
"uxss1-0006": {
    "record_status": "Active",
    "permissions": [
        {
```

```
            "login_name": "coadmin",
            "full_name": "Company Administrator",
            "permission": {
                "edit_data": "1",
                "view": "1",
                "modify_permission": "0"
            },
            "type": "U"
        },
        {
            "login_name": "firstname",
            "full_name": "Firstname Lastname",
            "permission": {
                "edit_data": "1",
                "view": "1",
                "modify_permission": "1"
            },
            "type": "U"
        },
        {
            "full_name": "Building Managers",
            "group_name": "Building Managers",
            "permission": {
                "edit_data": "1",
                "view": "1",
                "modify_permission": "0"
            },
            "type": "PG"
        }
    ],
    "updated_users": [
        "coadmin"
    ],
    "updated_groups": [
```

```
                "Building Managers"
            ]
        }
    },
    "message": [
        "success"
    ],
    "status": 200
}
```

Create (Add User/Group) BP Records Permission

POST /ws/rest/service/v1/bp/record/permission/{project_number}

Purpose:

Add User/Group to non-workflow records permission (in user mode) of a specific BP in a shell based on shell number or from Company level if project/shell number is not provided.

The input JSON shall provide various options to be considered for fetching the data

Input:

All parameters should be URL encoded.

Path Parameter

project_number: Specify the Project number in which the records exists; if not provided, then records are considered to be fetched from Company Level.

POST body is a JSON

> **Note**: POST call has input & output both as JSON in the body.

```
{
    "options":{
        "bpname" : "Vendors"
    },
    "data": {
        "record_no": ["VEN-002598"],
        "permissions": [
                {
                    "login_name": "PU1",
                    "type": "U",
```

```
                    "full_name": "P1 user",
                    "permission": {
                        "edit_data": "1",
                        "modify_permission": "1",
                        "view": "1"
                    }
                }
            ]
        }
}
```

Here "bpname" & "record_no" are mandatory in options.

In the request body record_no can be provided in below two formats.

1. "record_no": ["uxss1-0007", "uxss1-0006", "uxss1-0005"] For one or more records.

2. "record_no": "uxss1-0007" For only one record.

If record_no not provided, then error response will be provided to user to provide record_number.

Output:

JSON object containing 'status', 'data', 'message'

Message will be present if status is not 200; otherwise, it will be "success".

Create (Add User/Group) BP Records Permission Sample Response

```
{
    "data": {
        "VEN-0025": {
            "record_status": "Active",
            "added_users": [PU1],
            "permissions": [
                {
                    "login_name": "PU1",
                    "full_name": "PU1 P",
                    "permission": {
                        "edit_data": "1",
                        "view": "1",
                        "modify_permission": "1"
```

```
                    },
                    "type": "U"
                },
                {
                    "login_name": "coadmin",
                    "full_name": "Company Administrator",
                    "permission": {
                        "edit_data": "1",
                        "view": "1",
                        "modify_permission": "1"
                    },
                    "type": "U"
                },
                {
                    "full_name": "Space Planners",
                    "group_name": "Space Planners",
                    "permission": {
                        "edit_data": "1",
                        "view": "1",
                        "modify_permission": "1"
                    },
                    "type": "CG"
                }
            ],
            "added_groups": []
        }
    },
    "message": [
        "success"
    ],
    "status": 200
}
```

Delete (Remove User/Group) BP Records Permission

DELETE /ws/rest/service/v1/bp/record/permission/{project_number}

Purpose:

Add User/Group to non-workflow records permission (in user mode) of a specific BP in a shell based on shell number or from Company level if project/shell number is not provided.

The input JSON shall provide various options to be considered for fetching the data.

Input:

All parameters should be URL encoded.

Path Parameter

project_number: Specify the Project number in which the records exists; if not provided, then records are considered to be fetched from Company Level.

POST body is a JSON

> **Note**: POST call has input & output both as JSON in the body.

```
{
    "options":{
        "bpname" : "Vendors"
    },
    "data": {
        "record_no": ["VEN-002589"],
         "user_names" : ["coadmin","donna","PU1"]
        }
}
```

Here "bpname" & "record_no" are mandatory in options.

In the request body record_no can be provided in below two formats

1. "record_no": ["uxss1-0007", "uxss1-0006", "uxss1-0005"] For one or more records.

2 "record_no": "uxss1-0007" For only one record.

If record_no not provided, then error response will be provided to user to provide record_number.

Output:

JSON object containing 'status', 'data', 'message'

Message will be present if status is not 200; otherwise, it will be "success".

Delete (Remove User/Group) BP Records Permission Sample Response


```
{
    "data": {
        "VEN-0025": {
            "deleted_groups": [],
            "record_status": "Active",
            "deleted_users": [
                "PU1 P"
            ]
        }
    },
    "message": [
        "success"
    ],
    "status": 200
}
```

Representational State Transfer (REST) Web Services V2

HTTP Methods

GET, POST, PUT,DELETE

Authentication

Prerequisite for invoking any rest service - Integration user and JWT auth token should be available.

Integration User:

All rest services should be accessed via Integration User.

Create an Integration User at Company Workspace → User Administration → Integration User.

Make sure the integration user has the required module permissions enabled.

Integration user token expiration can be set from the Integration user UI. User can create, update Auth Token expiry date to - days, hours, and minutes.

1 to 500 is a valid value for Expiry Duration.

By default the value is set to 180 days.

Auth Token:

authentication token is required to access the rest services.

Token is set to be valid for date available in the response.

The token can be obtained by the below URL.

http://<host>:<port./ws/rest/service/v1/login

Method - GET

Headers -Authorization:Basic <Basic Auth of integration user>

(To Generate one via Postman rest client - Go to 'Authorization' tab → choose 'Basic Auth' in 'Type' dropdown → Enter Integration user name and password -. Click 'Update Request'. This generates the necessary Authorization header in 'Headers' tab.)

If the user name/password combination shared in the above Authorization Header is not valid/correct, the service throws **401** status code(Unauthorized)

Other conditions that are checked are - Integration user has to be active.

The expiry date is displayed as per the user date format preferences set in the Integration UI.

Sample response -


```
 {
"expiryDate": "05/18/2021",
"Timezone": "(UTC-08:00) Pacific Time (US & Canada)",
"expiryTime": "05/18/2021 11:44 AM",
"status": 200,
```

```
"token":
"eyJ0eXAiOiJEQiJ9.eyJ1c2VybmFtZSI6IiQkZGVsdDMifQ==.02318C44-9F3A-F931-3F14-C6FA7576F55E7D8D9975C46B5805179BD10D890DF15F"
}
```


Token can now be used in all rest services for authentication mechanism. All rest services should have the below set in the 'Header'.

Header - Sample

Key	Value
Authorization	Bearer eyJ0eXAiOiJEQiJ9.eyJ1c2VybmFtZSI6IiQkZGVsdDMifQ==.02318C44-9F3A-F931-3F14-C6FA7576F55E7D8D9975C46B5805179BD10D890DF15F

Notes:

- Validity of the token is as given in the login. The same can be re-used for subsequent rest requests until the expiry date.
- User can change Expiry Date to minutes, hours, and days in UI. Rest will retain those settings and generate new token with given Expiry Duration in the UI.
- If the Authorization token is not valid/correct for subsequent rest requests, those services will throw **401** status code(Unauthorized)
- If the Authorization token is correct but user (for whom token is generated) does not have permission for any rest request, that service will throw **403** status code(Forbidden).
- For every login rest service initiated, a new token is generated, old token is invalidated.

Data

If integration interface is defined for BP, then integration form will be used for this service; otherwise, all custom DEs defined in the form will be used.

For update, specify only the DEs to be updated.

Data Format

Input and output data will be in JSON format. Set HTTP header **Content-Type : application/json**.

Data Transfer

- HTTP request body will be used to send the JSON data.
- multipart/form-data will be used to handle files.

Standards

Get Method -

Will be used to request data from a source when no parameters are sent in the body.

> **Note:** Do not use the word "get" in the URL.

URL Encoding GET call parameter values

All parameters in GET call must be URL encoded.

For Postman REST client, use below code in "**pre-request Script**" tab, which will trim extra spaces in params key and encode special characters in params value.

```
pm.request.url.query.all().forEach( (param) =>
{
        param.key = param.key.trim();
        param.value = encodeURIComponent(param.value );
    }
);
```

POST Method -

POST can be used to retrieve data with parameters in body.

Can be used for CREATE, Retrieve data with parameters.

For example getBprecordlist - bpname is mandatory and need to be a sent in request body.

> **Note:** Do not use the word "create" in the URL.

To distinguish create and get data with parameters term list can be added in the URL.

PUT Method -

PUT is used update data.

> **Note:** Do not use the word "update" in the URL.

Logging:

All REST operations get audited in internal audit log table (not accessible to User, as it is not business case audit logs) .

A background CRON job is created to run on every SUNDAY 4:00AM (server time zone) which will purge older REST internal audit logs which goes beyond 25000 audit rows.

IP Filtering:

Customers have the ability to provide the list of IP addresses that can consume Unifier REST Web Services (V1 or V2). IP Filtering option is available in the portal in Company Properties - Security Tab.

If the 'IP Filtering Policy' field is checked in company properties, then the remote host will be validated based on their IP Version

1. If the remote host is IPv4 version then it will be checked against the list of IP addresses provided in the IPv4 text box.

2. If the remote host is of IPv6 version it will be checked against the list of IPs provided in the IPV6 text box.

3. If IP addresses are provided in CIDR format then the remote host IP will be checked against all addresses that come in the range.

In This Section

Business Processes 584
Shell Manager 627
WBS Sheet 649
Master Rate Sheet 654
Cash Flow 677
Activities and Assignments 681

Business Processes

If a BP has integration option, then that BP can use BP services.

> **Note**: By design, there are no web services available for the Request for Bid (RFB) business process.

Create BP Record

POST /ws/rest/service/v2/bp/record

Purpose:

Create a record in a specific BP in a shell based on "project_number" (provided in input JSON options) or from Company level if the project or shell number is not provided.

The input JSON provides various options to be considered for fetching the data.

This V2 service will use the step form (creation form) to create the BP record. All the required fields and validation rules will be run against the creation form used in the workflow details.

Input:

All parameters should be URL encoded.

Both input & output in JSON format in the body.

Create BP Record Input JSON

```
{
   "options":{
      "project_number" : "P-0002",
      "bpname":"Vendors",
      "workflow_details":{
         "workflow_name":"workflow_name",
```

```
            "user_name":"first_name  last_name",
            "action_name":"action_name"
         }
      },
      "data":[
         {
            "record_no":"hello",
            "uuu_user_id":"a@abc.com",
            "title":"v-00101",
            "uveLicenseNoTB16":null,
            "uuu_contact_company":"v-00101",
            "uveCOIAmoutCA":0,
            "_bp_lineitems":[
               {
                  "uirCntctFstNmTB":"a",
                  "uuu_tab_id":"List of Contacts",
                  "title":"t",
                  "short_desc":"Vendor Contact",
                  "uriCntctLstNmTB":"b",
                  "ugenStatePD":null,
                  "ugenZipCodeTXT16":null,
                  "uveEmailTB120":"hello@abc.com",
                  "ugenAddress3TXT120":null
               }
            ],
            "creator_id":"Company Administrator",
            "uveVendorIDTB16":"v-00101",
            "uuu_contact_first_name":"a",
            "status":"Active"
         }
      ]
}
```


Notes:

- If "record_no" is not provided, then an auto-generated "record_no" will be assigned to the record. If a unique "record_no" is provided, then the record will be created with a record number.
- Field properties such as Read-only in step form (creation form) will be retained. The Field mandatory in step form must be present in Integration Form with direction set as "both" or "input"
- Field direction provided in Integration form will be retained.
- Auto-Creation setting is mandatory in Shell or Company BP Setup in the Admin mode.
- In input JSON options, the "project_number" specifies the shell in which the records exist, if the "project_number" is not provided, then the records are considered to be from Company Level.
- The "bpname" is mandatory and is part of options form parameter.
- If the "workflow_details" is not specified, the auto-creation settings, defined on the BP setup, will be used.
- If the "workflow_details" are specified, then the three params "user_name," "workflow_name," and "action_name" are mandatory.
- The validations will be performed:
  - If the user is a valid active user in the project.
  - The workflow name is valid and active.
  - User is an assignee (user/group) on the creation step of the workflow.
  - Action name is valid outgoing link from the creation step.
  - The following error messages may display:
    - Enter a valid or an active user. (Missing key or invalid user name)
    - The workflow name is not valid. (Missing key or invalid/inactive workflow name)
    - The user does not have an active workflow template. (User is not an assignee on the creation step)
    - The workflow action name is not valid. (Missing key or invalid outgoing action name from creation step)

Output:

JSON object containing 'status', 'data', 'message'

Sample: Create BP Response


```
{
    "data": [],
    "message": [
        {
                "_record_status": "success",
                "uuu_user_id": "a@abc.com",
                "uuu_record_last_update_date": "04-12-2018",
                "uveFaxTB16": null,
                "uveCertificateNoTB64": null,
```

```
"uvePrimaryContactTB64": "a",
"title": "v-00101",
"uveLicenseNoTB16": null,
"uuu_contact_company": "v-00101",
"uveCOIAmoutCA": 0,
"_bp_lineitems": [
    {
        "uirCntctFstNmTB": "a",
        "uuu_user_workphone": null,
        "uuu_tab_id": "List of Contacts",
        "title": "t",
        "ugenAddress1TXT120": null,
        "ugenAddress2TXT120": null,
        "ugenCountryPD": null,
        "ugenCityTXT50": null,
        "short_desc": "Vendor Contact",
        "uriCntctLstNmTB": "b",
        "ugenStatePD": null,
        "ugenZipCodeTXT16": null,
        "uveEmailTB120": "hello@abc.com",
        "ugenAddress3TXT120": null
    }
],
"uvePolicyNoTB32": null,
"record_no": "hello",
"_attachment": [
    {
        "file_name": "new 1.txt"
    }
],
"uveVendorTypePD": "Architect",
"ugenCityTXT50": null,
"uveCoiExpDOP": null,
"uuu_dm_publish_path": "v_path",
```

```
                "uuu_contact_last_name": "b",
                "ugenZipCodeTXT16": null,
                "uveEmailTB120": "a@abc.com",
                "ugenAddress3TXT120": null,
                "uveReferenceIdTB16": null,
                "uuu_creation_date": "04-12-2018",
                "ugenRemarksTB4000": null,
                "uvePhoneTB64": null,
                "uveTaxIDTB16": null,
                "uveMinorityBusCB": 0,
                "uveInsuranceCoTB32": null,
                "ugenExpirationDateDOP": null,
                "uveWomanOwnedCB": 0,
                "uveVendorNameTB50": "v-00101",
                "ugenAddress1TXT120": null,
                "uveDisadvantagedBusCB": 0,
                "ugenDiscipline": null,
                "creator_id": "Company Administrator",
                "ugenAddress2TXT120": null,
                "ugenCountryPD": null,
                "uveVendorIDTB16": "v-00101",
                "ugenStatePD": null,
                "uuu_contact_first_name": "a",
                "status": "Active"
            }
    ],
    "status": 200
}
```


in case of any error:


```
   {
       "data": [],
       "message": [
           {
```

```
            "_record_status": "Error Business Process record_no hello
already exists. ",
            "record": {
                "uuu_user_id": "a@abc.com",
                "uuu_record_last_update_date": "04-12-2018",
                "uveFaxTB16": null,
                "uveCertificateNoTB64": null,
                "uvePrimaryContactTB64": "a",
                "title": "v-00101",
                "uveLicenseNoTB16": null,
                "uuu_contact_company": "v-00101",
                "uveCOIAmoutCA": 0,
                "_bp_lineitems": [
                    {
                        "uirCntctFstNmTB": "a",
                        "uuu_user_workphone": null,
                        "uuu_tab_id": "List of Contacts",
                        "title": "t",
                        "ugenAddress1TXT120": null,
                        "ugenAddress2TXT120": null,
                        "ugenCountryPD": null,
                        "ugenCityTXT50": null,
                        "short_desc": "Vendor Contact",
                        "uriCntctLstNmTB": "b",
                        "ugenStatePD": null,
                        "ugenZipCodeTXT16": null,
                        "uveEmailTB120": "hello@abc.com",
                        "ugenAddress3TXT120": null
                    }
                ],
                "uvePolicyNoTB32": null,
                "record_no": "hello",
                "_attachment": [
                    {
                        "file_name": "new 1.txt"
                    }
                ],
                "uveVendorTypePD": "Architect",
                "ugenCityTXT50": null,
                "uveCoiExpDOP": null,
```

```
                    "uuu_dm_publish_path": "v_path",
                    "uuu_contact_last_name": "b",
                    "ugenZipCodeTXT16": null,
                    "uveEmailTB120": "a@abc.com",
                    "ugenAddress3TXT120": null,
                    "uveReferenceIdTB16": null,
                    "uuu_creation_date": "04-12-2018",
                    "ugenRemarksTB4000": null,
                    "uvePhoneTB64": null,
                    "uveTaxIDTB16": null,
                    "uveMinorityBusCB": 0,
                    "uveInsuranceCoTB32": null,
                    "ugenExpirationDateDOP": null,
                    "uveWomanOwnedCB": 0,
                    "uveVendorNameTB50": "v-00101",
                    "ugenAddress1TXT120": null,
                    "uveDisadvantagedBusCB": 0,
                    "ugenDiscipline": null,
                    "creator_id": "Company Administrator",
                    "ugenAddress2TXT120": null,
                    "ugenCountryPD": null,
                    "uveVendorIDTB16": "v-00101",
                    "ugenStatePD": null,
                    "uuu_contact_first_name": "a",
                    "status": "Active"
                }
            }
        ],
        "status": 3000
    }
```


Status codes are:

1>200, for success.

2>3000, for Partial success.

Update BP Record

PUT /ws/rest/service/v2/bp/record

Purpose:

Update a record in a specific BP in a shell based on "project_number" (provided in input JSON options) or from Company level if the project or shell number is not provided.

The input JSON shall provide various options to be considered for fetching the data.

This V2 service will use the step form to update the BP record. All the required fields and Validation rules will be run against the step form used in the workflow details.

Form in the End step is a View Form and cannot be updated.

Input:

All parameters should be URL encoded.

Both input & output in JSON format in the body.

Update BP Record Input

```
{
   "options":{
      "project_number" : "P-0002",
      "bpname":"line6",
      "LineItemIdentifier":"upwoLISAS",
      "optimizedPickerExecution" : "true",
      "workflow_details":{
         "WFCurrentStepName":"Step 4",
         "WFActionName":"Line 3"
      }
   },
   "data":[
      {
         "ugenUserIDPK":null,
         "_bp_lineitems":[
            {
               "ugenShellPK":"/AP1",
               "uuu_tab_id":"Standard",
               "short_desc":"desc3_m11",
               "upwoLISAS":"0001",
               "uuu_line_item_status":"Active"
            }
         ],
         "record_no":"uxli6-0020",
```

```
        "title":"new title"
      }
   ]
}
```

Notes:

- Field properties such as Read-only in step form will be retained. The Field mandatory in step form must be present in the Integration Form with direction set as "both" or "input".
- The Field direction provided in the Integration form will be retained.
- Auto-Creation setting is mandatory in Shell or Company BP Setup in Admin mode.
- In input JSON options, the "project_number" specifies the shell in which the records exists, if the "project_number" is not provided, then the records are considered to be from Company Level.
- The "record_no" is mandatory and is part of data.
- The "bpname" is mandatory and is part of options form parameter.
- If a Workflow BP record is already accepted by an assignee, then the Update REST call will fail with error message: Record has already been accepted by Task Assignee.
- The WFCurrentStepName and WFActionName are part of the "workflow_details" and are for Workflow-type BPs. If the values for the WFCurrentStepName and WFActionName are provided, then the record will be updated and sent to the next step of the workflow. If the values for the WFCurrentStepName and WFActionName are not provided, then the record will be updated but will remain in same workflow step.
- The LineItemIdentifier is a part of options form parameter. The LineItemIdentifier value will be the DE name present in the lineItem. The DE name present in the lineItem should be present in the "data" (input record JSON) with its value.
- When you update a record using this REST service to add standard lines, do not include LineItemIdentifier as part of the options in the request. Updating the standard lines in a Payment Application BP is not currently supported.
- The optimizedPickerExecution is a part of the options form parameter. The optimizedPickerExecution controls the pickers 'populate' execution, on the existing line items. The values can be True or False.

  When the value is True, the Upper Form, or the Lineitem Form, input JSON is required to send the Datapicker DE tag (with values) to trigger 'populate' on the other DEs that are configured per design. If the input JSON does not contain the Datapicker DE property, the system will not process the Datapicker DE as a part of the update to 'populate' the values from the data picker record to the current record and lineitems that get updated.

  When the value is False, or non-existent, the system will continue to process according to the existing behavior.
- The "Enable Step for Integration" option in the Workflow BP setup is not available for the REST integration.

Steps to add LineItemIdentifier in the BP design:

1. Create a custom DE whose Data definition is 'Sys Auto Sequence'.
2. Add this DE to the detail form of the BP whose line items needs to be updated.
3. Navigate to Company Workspace > Business Processes and open the BP.

4. Navigate to the BP-Home > click Open drop-down > Data Elements. A data element configuration screen appears
5. Click the Auto Sequence tab and click Add.
6. Select the Data element added in the detail form and select the level as 'Per record'.
7. Provide the start value and click Create (next to format), add the parameter 'Sys Sequence counter', and click OK.
8. Add the DE to Integration > Detail and select "Direction" to "Both" for the DE.
9. Complete and deploy the BP.
10. In the body of the request add this DE name as Lineitem identifier and send the request.

Delete the Line-Item, using Update Request:

To delete the line-Item using update request, the field "_delete_line_item" should be used (value of which will be comma separated values of LineItemIdentifier DE) as shown in the following example:

Sample: Delete line-item input

```
{
   "options":{
      "project_number" : "P-0002",
      "bpname":"line6",
      "LineItemIdentifier":"upwoLISAS"
   },
   "data":[
      {
         "ugenUserIDPK":null,
         "_delete_bp_lineitems":"0002,0001,0003",
         "record_no":"uxli6-0021",
         "title":"title_m112244"
      }
   ]
}
```

Output:

JSON object containing 'status', 'data', 'message'

A message will be present if status is not 200 .

Status codes are:

1>200 OK, if all update succeeds.

2>3000, if any of records update fails.

Sample: Update BP Record Response

```
{
    "data": [],
    "message": [
        {
            "_record_status": "success",
            "record": {
                "ugenUserIDPK": null,
                "record_no": "uxli6-0021",
                "title": "title_m112244"
            }
        }
    ],
    "status": 200
}
```


Data Elements in Line Items

If the following Data Elements are present in the Line Items, they will not be updated.

- bitemid
- budgetid
- sovitemid
- uuu_cm0_picker
- xid
- ds_code
- fsm_lineitem_id
- asm_lineitem_id
- uuu_lat
- uuu_long
- uuu_company_account_name
- uuu_company_account_code
- uuu_company_acc_codepicker
- uuu_activity_picker
- uuu_asset_picker
- ref_bpo_lineitem
- ref_bpo
- ref_rfb
- refid
- uuu_sovlinum
- otherCompanyID
- uuu_costcode_picker

- scheduled_value
- uuu_asset_cum_depreciation
- uuu_asset_curr_period_dep
- uuu_asset_net_book_value
- uuu_unit_price
- currencyid
- due_date
- uuu_asset_calc_as_of_date
- uuu_from_date
- uuu_issue_date
- uuu_last_update_date
- uuu_rfb_due_date
- uuu_to_date
- uuu_week_picker
- uuu_datasource
- uuu_depreciation_mtd
- uuu_line_item_status
- row_id
- uuu_bid_count
- uuu_bidders_count
- uuu_planning_item_picker
- uuu_proj_picker
- record_no
- uuu_resc_picker
- uuu_role_picker
- uuu_commit_short_desc
- end_date
- uuu_creation_date
- uuu_asset_name
- uuu_commit_breakdown
- uuu_asset_code
- uuu_asset_navigation_code
- uuu_timescale_units
- creator_id
- wpid
- uuu_cost_costattribute
- uuu_cost_external_refid
- uuu_cost_status
- uuu_cost_cost_type
- uuu_cost_description
- uuu_cost_item

- uuu_cost_owner
- uuu_cost_code
- uuu_dm_create_date
- uuu_file_create_date
- uuu_file_issue_date
- uuu_dm_percent_complete
- uuu_file_size
- uuu_file_version
- uuu_dm_description
- uuu_dm_node_path
- uuu_dm_node_name
- uuu_file_revision_no
- uuu_file_title
- uuu_dm_create_by
- uuu_file_create_by
- uuu_fund_fundcategory
- uuu_fund_long_desc
- uuu_fund_description
- uuu_fund_fundname
- uuu_fund_code
- uuu_description
- uuu_resc_nwd_type
- uuu_resc_interest
- uuu_resc_proficiency
- uuu_resc_skill
- uuu_role_status
- uuu_role_name
- uuu_resc_capacity
- uuu_user_address
- uuu_user_city
- uuu_user_country
- uuu_user_email
- uuu_user_fax
- uuu_user_firstname
- uuu_user_homephone
- uuu_user_lastname
- uuu_user_mobilephone
- uuu_user_pager
- uuu_user_state
- uuu_user_timezone
- uuu_user_title

- uuu_user_workphone
- uuu_user_zip
- uuu_resc_status
- uuu_resc_code
- uuu_resc_name
- uuu_early_finish
- uuu_early_start,uuu_finish
- uuu_late_finish
- uuu_late_start
- uuu_start
- uuu_act_pct_complete
- uuu_activity_work_hrs
- uuu_duration
- uuu_fixed_cost
- uuu_float
- uuu_labor_cost
- uuu_non_labor_cost
- uuu_total_cost
- uuu_activity_id
- uuu_flag_complete
- uuu_flag_milestone
- uuu_activity_resources
- uuu_dependency_type
- uuu_activity_name
- uuu_outline_code
- uuu_cost_li_type

Update BP Record with Attachment

The following applies to the Update BP Record with Attachment (REST API Details in Business Processes) Web Services V2.

PUT /ws/rest/service/v2/bp/record/file

Purpose:

Update a record with attachment in a specific BP in a shell based on "project_number" (provided in input JSON options) or from Company level if the project or shell number is not provided.

The input JSON shall provide various options to be considered for fetching the data.

This V2 service will use the step form to update the BP record. All the required fields and Validation rules will be run against the step form used in the workflow details.

Form in the End step is a View Form and cannot be updated.

Input:

All parameters should be URL encoded.

Both input & output in JSON format in the body.

Update BP Record with Attachment

```
{
   "options":{
      "project_number" : "P-0002",
      "bpname":"line6",
      "LineItemIdentifier":"upwoLISAS",
      "workflow_details":{
         "WFCurrentStepName":"Step 4",
         "WFActionName":"Line 3"
      }
   },
   "data":[
      {
         "ugenUserIDPK":null,
         "_bp_lineitems":[
            {
               "ugenShellPK":"/AP1",
               "uuu_tab_id":"Standard",
               "short_desc":"desc3_m11",
               "upwoLISAS":"0001",
               "uuu_line_item_status":"Active",
                "_attachment_from_dm": {
                       "dm_file_ids": "115"
                 }
            }
         ],
         "record_no":"uxli6-0020",
         "title":"new title",
         "_attachment":[
            {
               "file_name":"file_1.txt",
```

```
                "title":"file_title1",
                "issue_date":"05/06/2018",
                "revision_no":"300"
             },
             {
                "file_name":"file_2.txt",
                "title":"file_title2",
                "issue_date":"05/06/2018",
                "revision_no":"200"
             }
          ],
        "_attachment_from_dm": {
              "dm_file_ids": "114"
          }
     }
   ],
   "_attachment":
   {
        "zipped_file_name" : "zip_file_name.zip",
        "zipped_file_size": "746089",
        "zipped_file_content" :"<base64_encoded string of create.zip
file>"
     }
}
```

Notes:

- If "adding attachment" is disabled in Upper form or Detail form, and user is trying to attach file to corresponding form. Updating record will fail.
- Only one record update with attachments is supported in this call. If the file exists in a record, then that file will be ignored and will not get revised .
- If step form has "add attachment" disabled, then files will not get attached.
- If the "_attachment" (outside data list) for zip file is not provided, then the record will be updated without attachment.
- Field properties such as Read-only in step form will be retained. The

Field mandatory in step form must be present in Integration Form with the direction set as "both" or "input".

- Field direction provided in Integration form will be retained.
- Auto-Creation setting is mandatory in Shell or Company BP Setup in the Admin mode.
- In input JSON options, the "project_number" specifies the shell in which the records exist, if the "project_number" is not provided, then the records are considered to be from Company Level.
- The "record_no" is mandatory and is a part of data.
- The "bpname" is mandatory and is a part of options form parameter.
- If a Workflow BP record is already accepted by an assignee, then Update REST call will fail with error message: "Record has already been accepted by Task Assignee".
- The WFCurrentStepName and WFActionName are part of the "workflow_details" and are for Workflow type BPs. If the values for WFCurrentStepName and WFActionName are provided, then the record will be updated and sent to next step of the workflow. If the values for WFCurrentStepName and WFActionName are not provided, then the record will be updated but it will remain on the same workflow step.
- The LineItemIdentifier is part of options form parameter. The LineItemIdentifier value will be DE name present in the lineItem. That DE should be present in "data" (input record JSON) with its value.
- The "Enable Step for Integration" option in the Workflow BP setup is not available for the REST integration.

Steps to add LineItemIdentifier in the BP design:

1. Create a custom DE with DD: Sys Auto Sequence.
2. Add this DE to the Detail Form of the BP with the line items that need to be updated.
3. Navigate to the Company Workspace > Admin mode > Business Processes and open the BP.
4. Click Open drop-down to open and select Data Elements to open the Data Elements Configuration window.
5. Click the Auto Sequence tab and click Add.
6. Select the data element added in the Detail Form and select the level as: Per Record.
7. Provide the start value and click Create.
8. Add the parameter "Sys Sequence counter" and click OK.
9. Add the DE to Integration > Detail.
10. Set the "Direction" to "Both" for that DE.
11. Complete and deploy the BP.
12. In the body of the request, add the DE name as Lineitem identifier and send the request.

If files from the Document Manager (DM) need to be attached, the field "**_attachment_from_dm**" must be used. Within that field, a string of comma separated file IDs for the relevant DM files must be provided to the "**dm_file_ids**" field. Up to 50 files can be attached from the DM at the record and each line item level. Document Type BPs and Text Type BPs are not currently supported. Validations performed for attaching files from the DM using file IDs include:

- If the integration user has DM permissions.
- If the string provided to field "**dm_file_ids**" is a string of comma separated file IDs.
- If the file IDs provided are valid file IDs.
- Record and line item each have up to 50 files attached from the DM.
- Example input field:

"*_attachment_from_dm*":{

"*dm_file_ids*":"*123,345*"

}

Delete the Line-Item, using Update Request:

To delete the line-Item using update request, the field "_delete_line_item" should be used (value of which will be comma separated values of LineItemIdentifier DE) as shown in the following example:

Sample: *Delete line-item input*

```
{
   "options":{
      "project_number" : "P-0002",
      "bpname":"line6",
      "LineItemIdentifier":"upwoLISAS"
   },
   "data":[
      {
         "ugenUserIDPK":null,
         "_delete_bp_lineitems":"0002,0001,0003",
         "record_no":"uxli6-0021",
         "title":"title_m112244"
      }
   ]
}
```

Output:

JSON object containing 'status', 'data', 'message'

A message will be present if status is not 200 .

Status codes are:

1>200 OK, if all creation succeeds.
2>3000, if any of records creation fails.

Sample: *Update record with attachment response*

```
{
   "data":[
   ],
   "message":[
      {
         "_record_status":"success",
         "record":{
            "ugenUserIDPK":null,
            "record_no":"uxli6-0021",
            "title":"title_m112244"
         }
      }
   ],
   "status":200
}
```

or if zip_file_size of uploaded zip file is not correct:

```
{
    "data": [],
    "message": [
        "Uploaded Zip file is invalid"
    ],
    "status": 3003
}
```

Data Elements in Line Items

If the following Data Elements are present in the Line Items, they will not be updated.

- `bitemid`
- `budgetid`
- `sovitemid`
- `uuu_cm0_picker`
- `xid`
- `ds_code`
- `fsm_lineitem_id`
- `asm_lineitem_id`

- uuu_lat
- uuu_long
- uuu_company_account_name
- uuu_company_account_code
- uuu_company_acc_codepicker
- uuu_activity_picker
- uuu_asset_picker
- ref_bpo_lineitem
- ref_bpo
- ref_rfb
- refid
- uuu_sovlinum
- otherCompanyID
- uuu_costcode_picker
- scheduled_value
- uuu_asset_cum_depreciation
- uuu_asset_curr_period_dep
- uuu_asset_net_book_value
- uuu_unit_price
- currencyid
- due_date
- uuu_asset_calc_as_of_date
- uuu_from_date
- uuu_issue_date
- uuu_last_update_date
- uuu_rfb_due_date
- uuu_to_date
- uuu_week_picker
- uuu_datasource
- uuu_depreciation_mtd
- uuu_line_item_status
- row_id
- uuu_bid_count
- uuu_bidders_count
- uuu_planning_item_picker
- uuu_proj_picker
- record_no
- uuu_resc_picker
- uuu_role_picker
- uuu_commit_short_desc
- end_date

- uuu_creation_date
- uuu_asset_name
- uuu_commit_breakdown
- uuu_asset_code
- uuu_asset_navigation_code
- uuu_timescale_units
- creator_id
- wpid
- uuu_cost_costattribute
- uuu_cost_external_refid
- uuu_cost_status
- uuu_cost_cost_type
- uuu_cost_description
- uuu_cost_item
- uuu_cost_owner
- uuu_cost_code
- uuu_dm_create_date
- uuu_file_create_date
- uuu_file_issue_date
- uuu_dm_percent_complete
- uuu_file_size
- uuu_file_version
- uuu_dm_description
- uuu_dm_node_path
- uuu_dm_node_name
- uuu_file_revision_no
- uuu_file_title
- uuu_dm_create_by
- uuu_file_create_by
- uuu_fund_fundcategory
- uuu_fund_long_desc
- uuu_fund_description
- uuu_fund_fundname
- uuu_fund_code
- uuu_description
- uuu_resc_nwd_type
- uuu_resc_interest
- uuu_resc_proficiency
- uuu_resc_skill
- uuu_role_status
- uuu_role_name

- uuu_resc_capacity
- uuu_user_address
- uuu_user_city
- uuu_user_country
- uuu_user_email
- uuu_user_fax
- uuu_user_firstname
- uuu_user_homephone
- uuu_user_lastname
- uuu_user_mobilephone
- uuu_user_pager
- uuu_user_state
- uuu_user_timezone
- uuu_user_title
- uuu_user_workphone
- uuu_user_zip
- uuu_resc_status
- uuu_resc_code
- uuu_resc_name
- uuu_early_finish
- uuu_early_start,uuu_finish
- uuu_late_finish
- uuu_late_start
- uuu_start
- uuu_act_pct_complete
- uuu_activity_work_hrs
- uuu_duration
- uuu_fixed_cost
- uuu_float
- uuu_labor_cost
- uuu_non_labor_cost
- uuu_total_cost
- uuu_activity_id
- uuu_flag_complete
- uuu_flag_milestone
- uuu_activity_resources
- uuu_dependency_type
- uuu_activity_name
- uuu_outline_code
- uuu_cost_li_type

Create BP Record with Attachment

POST /ws/rest/service/v2/bp/record/file

Purpose:

Create a record in a specific BP in a shell based on project_number (provided in input JSON options) or from Company level if project/shell number is not provided.

The input JSON shall provide various options to be considered for fetching the data.

This V2 service will use the step form (creation form) to create a BP record. All the required fields and Validation rules will be run against the creation form used in the workflow details.

> **Note**: Only one record with attachments is supported in this call.

Input:

All parameters should be URL encoded.

Both input & output in JSON format in the body.

Create BP Record with Attachment

```
{
    "options": {
        "project_number" : "P-0002",
        "bpname": "Vendors",
        "workflow_details":
        {
            "workflow_name": "workflow_name",
            "user_name" : "first_name  last_name",
            "action_name" : "action_name"
        }
    },
    "data": [
            {
                "uuu_user_id": "a@abc.com",
                "uuu_record_last_update_date": "04-12-2018",
                "uveFaxTB16": null,
                "uveCertificateNoTB64": null,
                "uvePrimaryContactTB64": "a",
                "title": "v-00101",
                "uveLicenseNoTB16": null,
```

```
"uuu_contact_company": "v-00101",
"uveCOIAmoutCA": 0,
"_bp_lineitems": [
    {
        "uirCntctFstNmTB": "a",
        "uuu_user_workphone": null,
        "uuu_tab_id": "List of Contacts",
        "title": "t",
        "ugenAddress1TXT120": null,
        "ugenAddress2TXT120": null,
        "ugenCountryPD": null,
        "ugenCityTXT50": null,
        "short_desc": "Vendor Contact",
        "uriCntctLstNmTB": "b",
        "ugenStatePD": null,
        "ugenZipCodeTXT16": null,
        "uveEmailTB120": "hello@abc.com",
        "ugenAddress3TXT120": null,
"_attachment":[
    {
        "file_name":"new 1.txt",
        "title":"file_title",
        "issue_date":"05/06/2018",
        "revision_no":"100"
    }
    ],
      "_attachment_from_dm":{
            "dm_file_ids":"456,789"
        }
    }
],
"uvePolicyNoTB32": null,
"uveVendorTypePD": "Architect",
"ugenCityTXT50": null,
```

```
"uveCoiExpDOP": null,
"uuu_dm_publish_path": "v_path",
"uuu_contact_last_name": "b",
"ugenZipCodeTXT16": null,
"uveEmailTB120": "a@abc.com",
"ugenAddress3TXT120": null,
"uveReferenceIdTB16": null,
"uuu_creation_date": "04-12-2018",
"ugenRemarksTB4000": null,
"uvePhoneTB64": null,
"uveTaxIDTB16": null,
"uveMinorityBusCB": 0,
"uveInsuranceCoTB32": null,
"ugenExpirationDateDOP": null,
"uveWomanOwnedCB": 0,
"uveVendorNameTB50": "v-00101",
"ugenAddress1TXT120": null,
"uveDisadvantagedBusCB": 0,
"ugenDiscipline": null,
"creator_id": "Company Administrator",
"ugenAddress2TXT120": null,
"ugenCountryPD": null,
"uveVendorIDTB16": "v-00101",
"ugenStatePD": null,
"uuu_contact_first_name": "a",
"status": "Active",
"_attachment":[
    {
        "file_name":"new 1.txt",
        "title":"file_title1",
        "issue_date":"05/06/2018",
        "revision_no":"300"
    },
    {
```

```
                        "file_name":"exp1.txt",
                        "title":"file_title2",
                        "issue_date":"05/06/2018",
                        "revision_no":"200"
                    }

                    ],
                "_attachment_from_dm":{
                    "dm_file_ids":"123,345"
                }
            }
        ]
    ,
    "_attachment": {
            "zipped_file_name" : "create.zip",
            "zipped_file_size": "746089",
            "zipped_file_content" :"<base64_encoded string of create.zip
file>"
    }
}
```

Notes:

- If "adding attachment" is disabled in Upper form or Detail form, and user is trying to attach file to corresponding form. Creating record will fail.
- Only one record creation with attachments is supported in this call.
- If the creation form has the "add attachment" disabled, then the files will not get attached.
- If the "_attachment" (outside data list) for zip file is not provided, then the record will be created without attachment.
- Field properties such as Read-only in step form (creation form) will be retained. The Field mandatory in step form must be present in Integration Form with direction set as "both" or "input".
- Field direction provided in Integration form will be retained.
- Auto-Creation setting is mandatory in Shell or Company BP Setup in the Admin mode.
- In input JSON options, the "project_number" specifies the shell in which the records exist, if the "project_number" is not provided, then the records are considered to be from Company Level.
- If the "record_no" is not provided, then an auto-generated "record_no" will be assigned to the record. If a unique "record_no" is provided, then the record will be created with a record number.

- The "bpname" is mandatory and is part of options form parameter.
- If the "workflow_details" is not specified, then the auto-creation settings, defined on the BP setup, will be used.
- If the "workflow_details" are specified, then the three params "user_name," "workflow_name," and "action_name" are mandatory.
- The validations will be performed:
  - If the user is a valid active user in the project.
  - The workflow name is valid and active.
  - User is an assignee (user/group) on the creation step of the workflow.
  - Action name is valid outgoing link from the creation step.
  - The following error messages may display:
    - Enter a valid or an active user. (Missing key or invalid user name)
    - The workflow name is not valid. (Missing key or invalid/inactive workflow name)
    - The user does not have an active workflow template. (User is not an assignee on the creation step)
    - The workflow action name is not valid. (Missing key or invalid outgoing action name from creation step)
- If the "_attachment" (outside data list) for zip file is not provided, then the record will be created without attachment.
- Only one record input must be provided in Create BP record with attachment.

If files from the Document Manager (DM) need to be attached, the field **"_attachment_from_dm"** must be used. Within that field, a string of comma separated file IDs for the relevant DM files must be provided to the **"dm_file_ids"** field. Up to 50 files can be attached from the DM at the record and each line item level. Document Type BPs and Text Type BPs are not currently supported. Validations performed for attaching files from the DM using file IDs include:

- If the integration user has DM permissions.
- If the string provided to field "dm_file_ids" is a string of comma separated file IDs.
- If the file IDs provided are valid file IDs.
- Record and line item each have up to 50 files attached from the DM.
- Example input field:

```
                "_attachment_from_dm":{
        "dm_file_ids":"123,345"
    }
```

Output:

JSON object containing 'status', 'data', 'message'

A message will be present if status is not 200 .

Status codes are:

1>200 OK, if all creation succeeds.

2>3000, if any of records creation fails.

Sample: Create Record with Attachment Response


```
{
    "data": [],
    "message": [
        {
            "uuu_user_id": "a@abc.com",
            "uuu_record_last_update_date": "04-12-2018",
            "uveFaxTB16": null,
            "uveCertificateNoTB64": null,
            "uvePrimaryContactTB64": "a",
            "title": "v-00101",
            "uveLicenseNoTB16": null,
            "uuu_contact_company": "v-00101",
            "_record_status": "success",
            "uveCOIAmoutCA": 0,
            "_bp_lineitems": [
                {
                    "uirCntctFstNmTB": "a",
                    "uuu_user_workphone": null,
                    "uuu_tab_id": "List of Contacts",
                    "title": "t",
                    "ugenAddress1TXT120": null,
                    "_attachment_from_dm":{
                        "dm_file_ids":"456,789"
                    },
                    "_attachment": [
                        {
                            "issue_date": "05/06/2018",
                            "revision_no": "100",
                            "file_name": "new 1.txt",
                            "title": "file_title"
                        }
                    ],
```

```
            "ugenAddress2TXT120": null,
            "ugenCountryPD": null,
            "ugenCityTXT50": null,
            "short_desc": "Vendor Contact",
            "uriCntctLstNmTB": "b",
            "ugenStatePD": null,
            "ugenZipCodeTXT16": null,
            "uveEmailTB120": "hello@abc.com",
            "ugenAddress3TXT120": null
        }
    ],
    "uvePolicyNoTB32": null,
    "_attachment_from_dm":{
            "dm_file_ids":"123,345"
     }
    "_attachment": [
        {
            "issue_date": "05/06/2018",
            "revision_no": "300",
            "file_name": "new 1.txt",
            "title": "file_title1"
        },
        {
            "issue_date": "05/06/2018",
            "revision_no": "200",
            "file_name": "exp1.txt",
            "title": "file_title2"
        }
    ],
    "record_no": "VEN-0086",
    "uveVendorTypePD": "Architect",
    "ugenCityTXT50": null,
    "uveCoiExpDOP": null,
    "uuu_dm_publish_path": "v_path",
```

```
            "uuu_contact_last_name": "b",
            "ugenZipCodeTXT16": null,
            "uveEmailTB120": "a@abc.com",
            "ugenAddress3TXT120": null,
            "uveReferenceIdTB16": null,
            "uuu_creation_date": "04-12-2018",
            "ugenRemarksTB4000": null,
            "uvePhoneTB64": null,
            "uveTaxIDTB16": null,
            "uveMinorityBusCB": 0,
            "uveInsuranceCoTB32": null,
            "ugenExpirationDateDOP": null,
            "uveWomanOwnedCB": 0,
            "uveVendorNameTB50": "v-00101",
            "ugenAddress1TXT120": null,
            "uveDisadvantagedBusCB": 0,
            "ugenDiscipline": null,
            "creator_id": "Company Administrator",
            "ugenAddress2TXT120": null,
            "ugenCountryPD": null,
            "uveVendorIDTB16": "v-00101",
            "ugenStatePD": null,
            "uuu_contact_first_name": "a",
            "status": "Active"
        }
    ],
    "status": 200
}
```


In case of any errors:


```
   {
       "data": [],
       "message": [
           {
```

```
            "_record_status": "Error Business Process record_no hello
  already exists. ",
            "record": {
                "uuu_user_id": "a@abc.com",
                "uuu_record_last_update_date": "04-12-2018",
                "uveFaxTB16": null,
                "uveCertificateNoTB64": null,
                "uvePrimaryContactTB64": "a",
                "title": "v-00101",
                "uveLicenseNoTB16": null,
                "uuu_contact_company": "v-00101",
                "uveCOIAmoutCA": 0,
                "_bp_lineitems": [
                    {
                        "uirCntctFstNmTB": "a",
                        "uuu_user_workphone": null,
                        "uuu_tab_id": "List of Contacts",
                        "title": "t",
                        "ugenAddress1TXT120": null,
                        "ugenAddress2TXT120": null,
                        "ugenCountryPD": null,
                        "ugenCityTXT50": null,
                        "short_desc": "Vendor Contact",
                        "uriCntctLstNmTB": "b",
                        "ugenStatePD": null,
                        "ugenZipCodeTXT16": null,
                        "uveEmailTB120": "hello@abc.com",
                        "ugenAddress3TXT120": null
                    }
                ],
                "uvePolicyNoTB32": null,
                "record_no": "hello",
                "_attachment_from_dm": {
                        "dm_file_ids": "115"
                 }
                "_attachment": [
                    {
                        "file_name": "new 1.txt"
                    }
                ],
```

```
                    "uveVendorTypePD": "Architect",
                    "ugenCityTXT50": null,
                    "uveCoiExpDOP": null,
                    "uuu_dm_publish_path": "v_path",
                    "uuu_contact_last_name": "b",
                    "ugenZipCodeTXT16": null,
                    "uveEmailTB120": "a@abc.com",
                    "ugenAddress3TXT120": null,
                    "uveReferenceIdTB16": null,
                    "uuu_creation_date": "04-12-2018",
                    "ugenRemarksTB4000": null,
                    "uvePhoneTB64": null,
                    "uveTaxIDTB16": null,
                    "uveMinorityBusCB": 0,
                    "uveInsuranceCoTB32": null,
                    "ugenExpirationDateDOP": null,
                    "uveWomanOwnedCB": 0,
                    "uveVendorNameTB50": "v-00101",
                    "ugenAddress1TXT120": null,
                    "uveDisadvantagedBusCB": 0,
                    "ugenDiscipline": null,
                    "creator_id": "Company Administrator",
                    "ugenAddress2TXT120": null,
                    "ugenCountryPD": null,
                    "uveVendorIDTB16": "v-00101",
                    "ugenStatePD": null,
                    "uuu_contact_first_name": "a",
                    "status": "Active"
                }
            }
        ],
        "status": 3000
    }
```


or if zip_file_size of uploaded zip file is not correct:


```
    {
        "data": [],
        "message": [
            "Uploaded Zip file is invalid"
        ],
        "status": 3003
```

```
}
```

Response Error Codes

The following applies to the Response Error Codes (REST API Details in Business Processes) Web Services V2:

Code	Message	Details
200	success	If the request is successful
500	Server Error, contact the system administrator.	If there is any exception when running this service
603	Business Process Name is not correct.	
650	Create Business Process failed reasons, files cannot be attached to upper form. Create Business Process failed reasons, files cannot be attached to detail form: <tab_name> Update Business Process failed reasons, files cannot be attached to upper form. Update Business Process failed reasons, files cannot be attached to detail form: <tab_name>	
657	Invalid record_no.	
895	Record has already been accepted by Task Assignee	
1101	Empty or Invalid JSON data	If required input JSON is empty
1419	The Project Funding Sheet has to be created prior to this operation.	When user is creating a Fund type BP record or Funding and WBS type BP Record, but a Project Funding Sheet has not been created.
3000	Partial failure.	Partial failure of REST service
3002	Invalid Input	

Code	Message	Details
11001	File not found for file ID(s):	If the user provides invalid file IDs for which there are no files in DM
11002	Currently, Document Type BP is not supported for attachments from DM	If the user tries to attach files from DM for Document Type BP
11003	No of files attached exceeds the allowed limit. Allowed limit: [50]	If the user tries to attach more than 50 files from DM at either record- or line item-level
11004	Invalid value for field dm_file_ids	If the user tries to give any value other than comma-separated numbers for the dm_file_ids field
11005	Currently, Text Type BP is not supported for attachments from DM	If the user tries to attach files from DM for Text Type BP

Payment Application with Auto-populate from SOV and Commits

Any auto-populate from SOV, Base Commit, or Change Commit will take precedent over the input provided in the JSON request file.

Get BP Record Permission

POST /ws/rest/service/v2/bp/record/wf/permission

Purpose:

Retrieve a list of users associated to a single workflow business process record, including the assignee as well as CCs of the record.

Input:

Request parameters are specified as a JSON Map {} - structure : { "options":{} }

In options JSON map : "options":{ "project_number": "<value>", "bpname": "<value>", "record_no": "<value>" },

Any other fields in the options map will be ignored.

Project number is an optional input. BP name and record number are mandatory.

Get BP Record Permission - Sample Input JSON

```
{
    "options": {
        "project_number" : "RE00000",
        "bpname" : "Action Items",
        "record_no" : "AI-000734"
    }
}
```

Output:

JSON object containing '**status**', '**data**', '**message**', '**rest_audit_id**'

Response Format:

```
     {
          "data": [
                    {
                         "record_id" : "<Internal record ID for the
specified BP record>",
                         "record_no" : "<Record number for the
specified BP record>",
                         "record_status" : "<BP record status>",
                         "users" : <List of maps>
                    }
               ],
           "message": [ "<message string>"],
          "status":<integer value>,
          "rest_audit_id" : <ID from the rest audit table matching this
request>
     }
```

Message will be present if status is not 200; otherwise, it will be "success".

Get BP Record Permission - Sample Response

```
{
  "data":
  [
    {
        "record_id" : "798",
        "record_no" : "AI-000734",
```

```
        "record_status" : "Pending",
        "users" : [
            {
                "username", "coadmin",
                "fullname", "Company Administrator"
            },
            {
                "username", "testuser1",
                "fullname", "Test User1"
            }
        ]
    }
  ],
  "message":
  [
    "success"
  ],
  "status":200,
  "rest_audit_id" : 720
}
```


Get BP Record Permission - Sample Error Response


```
{
    "data": [],
    "message": [
        "Business Process Name is required."
    ],
    "status": 603,
    "rest_audit_id": 721
}
```


Update BP Record Permission

PUT /ws/rest/service/v2/bp/record/wf/permission

Purpose:

Add or remove users from a single workflow business process record.

Input:

Request parameters are specified as a JSON Map {} - structure : { "options":{} }

In options JSON map : { "project_number": "<value>", "bpname": "<value>", "record_no": "<value>", "add_users" : <List of user names>, "remove_users" : <List of user names> }

Project number is an optional input. Add users and remove users are also optional, but one or the other is required. If using add users or remove users, user name is a mandatory input. BP name and record number are mandatory.

Update BP Record Permission - Sample Input JSON

```
{
    "options": {
        "project_number" : "RE00000",
        "bpname" : "Action Items",
        "record_no" : "AI-000734",
        "add_user" : ["testuser1", "coadmin"],
        "remove_user" : ["testuser2", "testuser3"]
    }
}
```

Output:

JSON object containing '**status**', '**data**', '**message**', '**rest_audit_id**'

Response Format :

```
     {
          "data": [
             {
                "record_id" : "<Internal record ID for the specified BP record>"
             }
          ],
          "message": [ "<message string>"],
          "status":<integer value>,
          "rest_audit_id" : <ID from the rest audit table matching this request>
     }
```

Message will be present if status is not 200; otherwise, it will be "success".

Update BP Record Permission - Sample Response

```
{
  "data":
  [
        {
            "record_id" : "798"
         }
  ],
  "message":
  [
    "success"
  ],
  "status":200,
  "rest_audit_id" : 720
}
```


Update BP Record Permission - Sample Error Response


```
{
    "data": [],
    "message": [
        "AI-000734 specified is in Initiation step"
    ],
    "status": 17007,
    "rest_audit_id": 721
}
```


Notes for Removing a User:

- The user should be part of the project/company.
- CC user(s)'s permissions can be removed at any time. They will not be able to view records in the Notification or Record log.
- The task will be marked closed if required and Permissions will be removed if the user is an assignee and:
  - Is not on the current step.
  - Is on the current step, the record is not accepted yet, and the user is not the only assignee on the current step.
  - Is on the current step, the record is accepted, and the completion policy is set to **Single**, but the user has not accepted the task.
- You cannot remove a user's permissions if that user is an assignee on the current step and:
  - The record is not accepted, and the user is the only assignee on the current step.

- The record is accepted, the completion policy is set to **Single**, and the user has accepted the task.
- The record is accepted, and the completion policy is set to **All-Major** or **All-Consensus**.

- No mail/notification will be sent when a user is removed from a workflow BP record.
- For the **Record Received by Me** Log View, permissions must be checked. Only records with the necessary permissions will be available for the user to access.

Notes for Adding a User:

- The user can only be added as a CC user to the current step and will be able to access records under notifications (for the current step) and the BP record log.
- The user should be an active user and part of the project/company.
- Adding users will not be dependent on Workflow Setup.
- The user will be added to the record if they have not been added either as an assignee or CC.
- A user cannot be added if the record is terminated.
- A mail/notification will be sent when the user is added in the workflow BP record.

> **Note:** If a user is initially added to in-flight records and is subsequently removed and re-added, no notifications will be generated, and the workflow progress will remain unchanged. However, the user will still be included as a CC user in the current step and will have access to the record from the BP log.

Add Assignees to Workflow BP Records

```
PUT /ws/rest/service/v2/bp/record/wf/addassignees
```

Purpose

Add existing project/shell users as assignees to a list of existing in-flight workflow BP records of a project/shell with an **Active**, **View-Only**, or **On-Hold** status.

The system updates the BP Record Audit Log to reflect changes made using this REST service.

> **Notes:**
>
> - Users who have already accepted a task as Assignees cannot be added to the corresponding workflow BP records using this REST service. Including them causes the request to fail.
> - You can use this REST service for workflows with a Completion Policy of All-Majority and All-Consensus; you cannot use it for a Single Completion Policy.

Prerequisites

- You must be an active user and a member of the company and the applicable project/shell.

- You must have Workflow Business Process Permissions (Get, Update) in the User Administration to use this API. Otherwise, contact your company administrator to update your Integration permission settings for Workflow Business Processes as outlined in **Updating Permissions for Integration Users** in the *Unifier General Administration Guide*.
- The Completion Policy must be All-Majority or All-Consensus.

Request Format

The request parameters are specified as a JSON Map {} - structure: `{ "options":{}, "data":[{}] }`

In the options JSON map: `{"project_number": "<value>", "bpname": "<value>","email_notification" : "<yes/no>"}`

In the data list: `[ {"record_numbers": <List of record numbers>, "add_assignees" : <List of usernames>} ]`

The data list size is restricted to one.

Request Parameters

The following parameters can be included in the request:

Request Parameter	Mandatory?	Data Type	Description
`project_number`	No	String	A valid 'Active' Unifier Shell number. For example, RE00000. If no value is specified, it is considered as Company.
`bpname`	Yes	String	A Business Process name of a Workflow BP. For example, Action Items.
`email_notification`	No	Boolean	Specify if an email notification is to be sent. Values include: *Yes* or *No* (default).
`record_numbers`	Yes	List	Record numbers of a Workflow BP. For example, ["AI-000734", "AI-000735"].

Request Parameter	Mandatory?	Data Type	Description
add_assignees	Yes	List	A list of user names (login name) to be added as assignees to the current step of the workflow record. For example, ["testuser1", "coadmin"].

Recommendations

When submitting the request, you can specify in the array up to 1000 records and 10 assignees.

Sample Request

```
{
    "options": {
        "project_number" : "RE00000",
        "bpname" : "Action Items",
        "email_notification" : "yes"
    },
    "data" : [
        {
            "record_numbers" : ["AI-000734", "AI-000735"],
          "add_assignees" : ["testuser1", "coadmin"]
        }
    ]
}
```

Response Format

A JSON object is returned in the following format.

```
{
    "data": [{"record_id" : "<Internal record ID for the specified BP record>"}],
    "message": [ "<list of messages>"],
    "status": <integer value>,
    "rest_audit_id": <ID from the REST audit table matching this request>
}
```

A successful response displays a status code 200.

A failed response displays a message with a status code 3010.

Sample Success Response

```
{
   "data":  [     ],
  "message":  [    "success"  ],
  "status": 200,
  "rest_audit_id": 720
}
```

Sample Failed Response 1

```
{
    "data": [],
    "message": ["Business Process Name is not correct."],
    "status": 17002,
    "rest_audit_id": 721
}
```

Sample Failed Response 2

```
{
    "data": [],
    "message": [
                "AI-000734 specified is in Initiation step.",
                "AI-000735 is terminated, cannot add assignee.",
                "testuser1 is not an active member of RE00000."
            ],
   "status": 3010,
    "rest_audit_id": 722
}
```

Supported Validation Messages and Status Codes

The following validation messages and status codes display in the response when incorrect values are provided in the request:

Field Name	Use-case Scenario	Status Code	Error Message
project_number	Project number was not specified for a shell-level BP.	1361	Project number is required
project_number	Specified project number is invalid (only applies to shell-level BPs).	602	Project/Shell Number is not correct.
project_number	Specified project number is not active (only applies to shell-level BPs).	17022	Update cannot be performed when project/shell status is Inactive or View-Only or On-Hold.
bpname	BP name was omitted.	603	Business Process Name is required.
bpname	Comma-separated list of BP names specified.	17001	Cannot support multiple business processes.
bpname	Specified BP name is invalid.	17002	Business Process Name is not correct.
bpname	Specified BP name is not a Workflow BP.	17003	Business Process is not a workflow BP.
bpname	Specified BP name is not active.	3006	Business Process is not Active.
email_notification	email_notification is specified but value is empty or incorrect.	17021	Invalid email notification, provide either 'yes' or 'no' value.
record_numbers	Record number was omitted.	17004	Record number is required.
record_numbers	Specified record number is invalid.		<record number> is not correct.
record_numbers	Specified record is in Initiation step.		<record number> is in Initiation step, cannot add assignee.
record_numbers	Specified record is terminated.		<record number> is terminated, cannot add assignee.

Field Name	Use-case Scenario	Status Code	Error Message
record_numbers	Completion Policy is Single for specified record number and record has been accepted by an assignee.		<record number> has already been accepted, cannot add assignee.
record_numbers	Specified record is closed.		<record number> is closed, cannot add assignee.
add_assignees	add_assignees was omitted.	17020	Add assignees is required.
add_assignees	add_assignees is specified but value is blank.	17016	User name is required for add assignees.
add_assignees	Specified user is not active in the project/shell or company.		<user name> is not an active member of <project number>/company.

Shell Manager

- Create Shell
- Update Shell
- Get Shell

Create Shell

POST /ws/rest/service/v2/admin/shell

Purpose

Creates a new shell with additional properties such as Options, Links, Currency, Images, and Gateway Integration. You can create only one new shell with each request.

The service further supports all options available through the user interface, including:

- All currencies added by the user
- Any links added by the user
- Options: Phase, Email Address, Send Notifications To (list of emails), Document Manager Attribute Form, E-Signature Type, Time Zone, Financial Period, Template Name
- Default Calendar

- Custom Print Template
- View Forms: Form Name, and Permission Structure

> **Note**: If auto-numbering is set, the shell number in the response might not be the same as the input.

Request Format

Send an API request as a JSON Map with the following structure:

```
{
          "options":{},
          "data":[]
}
```

Options JSON Map Format

In the "options" JSON Map you can include the following parameters:

```
 "options":{
       "copy_from_shell_template": "<value>",
       "copy_modules": "<value>",
       "default_currency": "<value>" }
                 }
```

To view a master list of all fields supported in the request, select the following menu option: **uDesigner > Shell Manager > Select the Template > Integration > Detail**.

The fields in the Detail menu are applicable to the **Shell General** tab.

uuu_shell_addl_props JSON Map Format

To support all other tabs, specify a `uuu_shell_addl_props` key with the following JSON map structure:

```
{
     "uuu_shell_addl_props":
        {
             "options": { },
             "links": [ ],
             "currency": [ ],
             "images": { },
             "gateway": [ ]
        }
}
```

All keys within uuu_shell_addl_props key are optional. For more details, see a detailed listing of all Optional Request Parameters Supported in uuu_shell_addl_props Key.

Request Parameters Supported in "Options" JSON Map

The following parameters can be included in the request:

Request Parameters	Required ?	Data Type	Description
copy_from_shell_template	Yes	String	The name of the shell template
copy_modules	No	String	Indicates whether the sub-modules are to be copied to the new shell. Choices include: *Yes* or *No* (default).
default_currency	No	String	The currency code available in the Shell template/Company Currencies. If a currency code is not specified, defaults to the currency code of the shell template.

Optional Request Parameters Supported in uuu_shell_addl_props Key

To support optional fields in the request, specify a `uuu_shell_addl_props` key with the following JSON map structure:

```
{ "uuu_shell_addl_props": { "options": { }, "links": [ ], "currency": [ ], "images": { }, "gateway": [ ] } }
```

This section provides a detailed listing of all optional request parameters supported in:

- `"options"` JSON list
- `"links"` JSON list
- "currency" JSON list
- `"images"` JSON list
- `"gateway"` JSON list

Optional Request Parameters Supported in the "Options" JSON Map of uuu_shell_addl_props Key

Specify optional "options" within the `"uuu_shell_addl_props"` key using the following JSON Map structure:

```
{
    "uuu_shell_addl_props": {
        "options": {
            "dmFormUsed": "",
            "financialPeriod": "",
            "eSign": "",
```

```
            "projectPhase": "",
            "timezone": "",
            "notification": {
                  "users": []
             },
        }
    }
}
```

Request Parameters	Required?	Data Type	Description
dmFormUsed	No	String	Document Manager value
financialPeriod	No	String	Financial Period value
eSign	No	Integer	eSignature value. Choices include: None (Default), DocuSign, and Adobe
projectPhase	No	String	Project Phase value
timezone	No	String	Timezone value
notification	No	String Array	Username
users	No	String	

Optional Request Parameters Supported in the "Links" JSON Map of uuu_shell_addl_props Key

Specify optional links within the `"uuu_shell_addl_props"` key using the following JSON Map structure:

```
{
    "uuu_shell_addl_props": {
        "links": [
            {
                "name": "",
                "url": "",
                "orderId": 0,
            }
        ]
    }
```

```
}
```

Request Parameters	Mandatory?	Data Type	Description
name	Yes	String	The name of the link.
url	Yes	String	URL for the link.
orderId	No	Integer	The number that specifies the order in which the link displays in a sequence.

Optional Request Parameters Supported in Currency JSON list [] in uuu_shell_addl_props Key

Specify optional currency values within the `"uuu_shell_addl_props"` key using the following JSON Map structure:

```
{
    "uuu_shell_addl_props": {
        "currency": [
            {
                "currencyCode": "",
                "rateType": "",
                "rate": 0.0
                "comments": "",
            }
        ]
    }
}
```

Request Parameters	Required?	Data Type	Description
currencyCode	Yes	String	The currency code.
rateType	Yes	String	Indicate the type of currency. Choices include: FLOAT (default) or PEG.
rate	No	Number (Decimal supported)	Specify the rate only if the rate type is PEG.
comments	No	String	Enter more details about the currency.

Optional Request Parameters Supported in the "Images" JSON Map of uuu_shell_addl_props Key

Specify optional "Images" within the "uuu_shell_addl_props" key using the following JSON Map structure:

```
{
    "uuu_shell_addl_props": {
        "images": {
            "shell_images": [
                {
                    "file_name": "",
                    "title": ""
                },
                {
                    "file_name": "",
                    "title": ""
                }
            ],
            "_attachment": {
                "zipped_file_content": "",
                "zipped_file_name": "",
                "zipped_file_size": 0
            }
        }
    }
}
```

Request Parameters	Mandatory?	Data Type	Description
The following parameters are supported for shell_images.			
file_name	Yes	String	The image file name included in the zip file. Choices include: GIF, PNG, JPG, JPEG, TIF, TIFF
title	Yes	String	Name of the new image
The following parameters are supported for attachments.			

Request Parameters	Mandatory?	Data Type	Description
zipped_file_content	Yes	String	Base64 content of the ZIP file
zipped_file_name	Yes	String	Original ZIP file name
zipped_file_size	Yes	String	Original ZIP file size in bytes

Optional Request Parameters Supported in the "gateway" JSON Map of uuu_shell_addl_props Key

Specify optional "gateway" within the `"uuu_shell_addl_props"` key using the following JSON Map structure:

```
{
    "uuu_shell_addl_props": {
        "gateway": [
            {
                "p6_project_id": "EVM240"
            },
            {
                "p6_project_id": "EVM241"
            }
        ]
    }
}
```

Request Parameters	Mandatory?	Data Type	Description
p6_project_id	Yes	String	The P6 EPPM project ID configured in the Primavera Gateway application.

Response Format

The REST service returns a JSON Map in the following format:

```
{
    "data": [],
    "message": [],
    "status": <REST status code value>,
    "rest_audit_id": <value>
```

}

Response Parameters Supported in JSON Map

The following response parameters are supported in the above response format:

Request Parameters	Data Type	Description
data	String	The name of the shell template

message	String	Each JSON map as the response for every request.
		{
		"message": [
		{
		"<shellNumberDE>": "",
		"_record_status": "",
		"errors": []
		}
		]
		}
		where:
		▸ <shellNumberDE> is the unique key for each shell
		▸ "_record_status" indicates the status of each shell
		▸ "errors" displays any errors in processing the additional properties

status	Integer	The overall REST status code
rest_audit_id	Integer	The audit ID

Sample Success Request

In addition to the data, a successful response displays:

- a response "status" code of 200
- a `_record_status` key with a "SUCCESS" value or an error message

```
{
  "data": [
    {
      "uBuildingNumber": "BLDCBS - 0006",
      "uuu_administrator": "Company Administrator",
      "uuu_location": "/All Properties",
      "uuu_shell_addl_props": {
```

```
        "images": {
          "shell_images": [
            {
              "file_name": "Image_1.png",
              "title": "image one"
            },
            {
              "file_name": "Image_2.png",
              "title": "image two"
            }
          ],
          "_attachment": {
            "zipped_file_content":
"UEsDBBQAAAAIAHhl7lZhg1mDOAQAAN4IAAALAAAASW1hZ2VfMS5wbmfrDPBz5+WS4mJgYO
D19HAJYmBgnADCHGxAkYb9ZmcYGDiWero4hlTMeXt3b/bkWvljD+OX1Lc94l7UIRSt6ypy8
OjRo6qRPl4rOXbt3GEZEXMnJubIyZOe0/1ira4udHYU2SViVaIhwtXa1PHI+91am9od8W8y
J2lPl2MvOVta9uvD3rYlF19/",
            "zipped_file_size": 15657,
            "zipped_file_name": "Image.zip"
          }
        },
        "options": {
          "dmFormUsed": "Folder and Document Attributes",
          "financialPeriod": "FP1",
          "eSign": "Default",
          "projectPhase": "Preplanning",
          "timezone": "(UTC-12:00) International Date Line West",
          "notification": {
              "users": ["tt"]
          }
        },
        "links": [
          {
            "orderId": 1,
            "name": "Google",
```

```
            "url": "http://www.google.com"
          }
        ],
        "currency": [
          {
            "rateType": "PEG",
            "comments": "Metadata for the currency value",
            "rate": 150.0503,
            "currencyCode": "JPY"
          }
        ],
        "gateway": [
          {
            "p6_project_id": "EVM242"
          },
          {
            "p6_project_id": "EVM241"
          }
        ]
      },
      "uBuildingName": "W_BUILDING_CBS 0006"
    }
  ],
  "message": [
    {
      "uBuildingNumber": "BLDCBS - 0006",
     "_record_status": "SUCCESS"
    }
  ],
  "status": 200,
  "rest_audit_id": 9074
}
```

Sample Failure Request

The following is an example of a failed request.


```
{
  "options": {
    "copy_from_shell_template": "BPCBS_T0001",
    "copy_modules": "yes",
    "default_currency": "AFN"
  },
  "data": [
    {
      "uBuildingNumber": "BLDCBS - 0007",
      "uBuildingName": "W_BUILDING_CBS 0007",
      "uuu_location": "/All Properties",
      "uuu_administrator": "Company Administrator",
      "uuu_shell_addl_props": {
        "gateway": [
          {
            "p6_project_id": "EVM242"
          },
          {
            "p6_project_id": "EVM241"
          }
        ],
        "links": [
          {
            "orderId": 1,
            "name": "Google",
            "url": "h://www.google.com"
          }
        ],
        "options": {
          "dmFormUsed": "Folder and Dcument Attributes",
          "financialPeriod": "FP",
```

```
    "eSign": "Default",
    "projectPhase": "Preplaning",
    "timezone": "(UTC-12:00)International Date Line West",
    "notification": {
        "users": ["tts"]
    }
},
"currency": [
    {
        "currencyCode": "",
        "comments": "Metadata for the currency value",
        "rateType": "PEG",
        "rate": 150.0503
    }
],
"images": {
    "shell_images": [
        {
            "file_name": "Image_1.pg",
            "title": "image one"
        },
        {
            "file_name": "Image_10.png",
            "title": "image two"
        }
    ],
    "_attachment": {
        "zipped_file_content":
"UEsDBBQAAAAIAHhl7lZhg1mDOAQAAN4IAAALAAAASW1hZ2VfMS5wbmfrDPBz5+WS4mJg
YOD19HAJYmBgnADCHGxAkYb9ZmcYGDiWero4hlTMeXt3b/bkWvljD+OX1Lc94l7UIRSt6ypy8
OjRo6qRPl4rOXbt3GEZEXMnJubIyZOe0/1ira4udHYU2SViVaIhwtXa1PHI+91am9od8W8yJ2lPl
2MvOVta9uvD3rYlF19/rWJl4HsRcJWZYYU6I6OCkgKDCwtLQ0cDg4CgAIMSE5PDkjLGn9/eRs
+cPVs7OTl56cWML3/",
        "zipped_file_name": "Image.zip",
        "zipped_file_size": 15657
```

```
            }
          }
        }
      }
    ]
}
```


Sample Failure Response

The following is an example of the response to the above sent failed request. A failed response displays a status code and error messages in the body of the "message".


```
{
  "data": [
    {
      "uBuildingNumber": "BLDCBS - 0007",
      "uuu_administrator": "Company Administrator",
      "uuu_location": "/All Properties",
      "uuu_shell_addl_props": {
        "images": {
          "shell_images": [
            {
              "file_name": "Image_1.pg",
              "title": "image one"
            },
            {
              "file_name": "Image_10.png",
              "title": "image two"
            }
          ],
          "_attachment": {
            "zipped_file_content":
"UEsDBBQAAAAIAHhl7lZhg1mDOAQAAN4IAAALAAAASW1hZ2VfMS5wbmfrDPBz5+WS4mJg
YOD19HAJYmBgnADCHGxAkYb9ZmcYGDiWero4hlTMeXt3b/bkWvljD+OX1Lc94l7UIRSt6ypy8
OjRo6qRPl4rOXbt3GEZEXMnJubIyZOe0/1ira4udHYU2SViVaIhwtXa1PHI+91am9od8W8yJ2lPl
2MvOVta9uvD3rYlF19/rWJl4HsRcJWZYYU6I6OCkgKDCwtLQ0cDg4CgAIMSE5PDkjLGn9/eRs
+cPVs7OTl56cWML3/f//",
```

```
        "zipped_file_size": 15657,
        "zipped_file_name": "Image.zip"
    }
},
"options": {
    "dmFormUsed": "Folder and Dcument Attributes",
    "financialPeriod": "FP",
    "eSign": "Default",
    "projectPhase": "Preplaning",
    "timezone": "(UTC-12:00)International Date Line West",
    "notification": {
          "users": ["tts"]
    }
},
"links": [
    {
        "orderId": 1,
        "name": "Google",
        "url": "h://www.google.com"
    }
],
"currency": [
    {
        "rateType": "PEG",
        "comments": "Metadata for the currency value",
        "rate": 150.0503,
        "currencyCode": ""
    }
],
"gateway": [
    {
        "p6_project_id": "EVM242"
    },
```

```
            {
               "p6_project_id": "EVM241"
            }
          ]
        },
        "uBuildingName": "W_BUILDING_CBS 0007"
      }
    ],
    "message": [
      {
        "uBuildingNumber": "BLDCBS - 0007",
        "_record_status": "Shell creation failed because of errors found while processing the additional shell options",
        "errors": [
          "url is invalid; cannot exceed 250 chars",
          "Same project available in the other shells: (EVM242 -> W_BUILDING_CBS 0006), (EVM241 -> W_BUILDING_CBS 0006)",
          "Invalid project phase",
          "currencyCode is a required field",
          "Invalid timezone",
          "DM name does not exist",
          "Non-image files found in the request"
        ]
      }
    ],
    "status": 3000,
    "rest_audit_id": 9076
}
```


Supported Validation Messages and Status Codes

The following error messages and status codes display in the response when incorrect values are provided in the request.

Field Name	Use-case Scenario	Status code	Error Message
copy_from_shell_template	The key is missing or an incorrect shell template name is given.	812	Copy from shell/template number is not correct
default_currency	An incorrect currency code is included in the request.	3000	Shell not created due to an invalid currency code
In the "links" JSON map:			
name	The name is not specified in the request	3000	Name is a required field.
name	The name is more than 50 characters in length.	3000	name is invalid; cannot exceed 50 chars
In the "currency" JSON map:			
currencyCode	The currencyCode is not included in the request.	3000	currencyCode is a required field
currencyCode	The currencyCode is invalid.	3000	Currency exchange rates are not available
currencyCode	The base currency of the project is altered.	3000	Update to the currency is not allowed because it matches Company Currency
currencyCode	Multiple currency details are available for the same currency code.	3000	Duplicate currency found in the request
currencyCode	Unable to find the company currency.	3000	Unable to find the Company Currency
rate	The rateType is PEG, but no rate is included in the request.	3000	Rate value for the PEG type is not a number
comments	The length of the comments is more than 250 characters.	3000	Comments are invalid; cannot exceed 250 chars
In the "options" JSON map:			
projectPhase	The projectPhase does not have a value in the request.	3000	Invalid project phase.

Field Name	Use-case Scenario	Status code	Error Message
projectPhase	Multiple values are found with a given value.	3000	Multiple Project phase found
timezone	No timezone is found with a given value.	3000	Invalid timezone
timezone	Multiple timezones are found with a given value.	3000	Multiple timezone entries found
financialPeriod	No financial period is found with a given value.	3000	Financial period does not exist
notification → users	An invalid user is included in the request.	3000	User(s) do not have access or not found: user1, user2.
dmFormUsed	No document manager is found with a given value.	3000	DM name does not exist.
eSign	eSign is not configured in the company workspace.	3000	Requested E-Signature not configured
eSign	an invalid eSign is given in the request	3000	Invalid e-sign
In the "images" JSON map:			
file_name	An invalid request is found in the request.	3000	Invalid JSON structure found in the request for additional properties
file_name	The file_name is missing.	3000	File_name and title are required for shell images
file_name	Other image formats included in the request	3000	File upload prevented due to blocked file extension
title	The title is missing.	3000	file_name and title are required for shell images
zipped_file_content	Non-images are found in the zip file.	3000	Non-image files found in the request
zipped_file_content	no image is available in the zip.	3000	No images found in the ZIP file

Field Name	Use-case Scenario	Status code	Error Message
zipped_file_content	Issue in unzipping the file.	3000	Unable to unzip the files
zipped_file_content	An invalid attachment is available.	3000	Invalid attachment found in the request
zipped_file_size	A mismatch with the file size in the request.	3000	File size is mismatched with the incoming file
In the "gateway" JSON map:			
p6_project_id	An invalid request is found in the request.	3000	Invalid JSON structure found in the request for additional properties
p6_project_id	p6_project_id is null/missing/empty string.	3000	p6_project_id is a required field
p6_project_id	EVM license is not provided.	3000	Invalid EVM License
p6_project_id	Cloud schedule project exists	3000	Cloud schedule project exists
p6_project_id	Duplicate project id available in the request.	3000	Same project is available multiple times in the same shell: id1, id2, ...
p6_project_id	Trying to delete the integrated project.	3000	Unable to delete the project as it is integrated.
p6_project_id	Same project available in other shells	3000	Same project available in the other shells: EVM → shell name

Update Shell

PUT /ws/rest/service/v2/admin/shell

Input JSON

```
{
"options" : {
```

```
"shelltype" : "All Properties"
},
"data" :
[
{
"uPropertyNumber" : "RE00000",
"description" : "TEST35"
} ,
{
"uPropertyNumber" : "BLD0005",
"description" : "TEST35"
}
]
}
```

Output JSON

```
{
"data":
[
],
"message":
[
{
"_record_status":"SUCCESS",
"description":"TEST35",
"uPropertyNumber":"RE00000"
},
{
"_record_status":"Shell Number is not correct. ",
"description":"TEST35",
"uPropertyNumber":"BLD0005"
}
],
"status":3000
}
```

If all the shells are updated successfully, then the response status code will be 200.

The Response will have the input data sent in plus the _record_status.

The _record_status will indicate if the shell update is a success or the respective error message.

Update Shell supports all options available through the user interface, including:

- Currency
  - All currencies added by the user
- Options
  - Phase, Email Address, Send Notifications To (list of emails), Document Manager Attribute Form, E-Signature Type, Time Zone, Financial Period, Template Name
- Links
  - Any links added by the user
- Default Calendar
- Custom Print Template
- Gateway Integration
  - Project ID
- Primavera Integration
  - Project ID
- View Forms
  - Form Name, Permission Structure

Get Shell

GET /ws/rest/service/v2/admin/shell

Purpose

Fetch all existing shells with additional properties such as Options, Links, and Currency.

Input JSON

Optional filter condition can be provided as parameter to the GET request .

Name of key is options and value is in JSON format as below:

```
{
  "filter": {
                  "shell_type" : "Buildings"
              }
 }
```

The only applicable filter condition is the `"shell_type".`

Only one value for shell_type is supported.

Output JSON

1) When filter condition is not provided, Response will contain all the shells (not template) that are in "Active" status.

```
{
    "data":
    [
        {
```

```
                "shell_model_name":"us_apr",
                "shell_number":"RE00000",
                "shell_name":"All Properties",
                "shell_phase":null,
                "latitude":null,
                "longitude":null,
                "shell_location":null
            },
            {
                "shell_model_name":"us_st",
                "shell_number":"site-001",
                "shell_name":"Site_1",
                "shell_phase":null,
                "latitude":null,
                "longitude":null,
                "shell_location":"/All Properties"
            },
            {
                "shell_model_name":"us_bld",
                "shell_number":"B-0001",
                "shell_name":"Building_1",
                "shell_phase":null,
                "latitude":null,
                "longitude":null,
                "shell_location":"/All Properties/Site_1"
            }
        ],
        "message":
        [ ""
        ],
        "status":200
    }
```


2) When filter condition is provided (shell type "Buildings"), then Response will contain shells only of type "Buildings".


```
    {
        "data":
        [
            {
                "shell_model_name":"us_bld",
                "shell_number":"B-0001",
```

```
                "shell_name":"Building_1",
                "shell_phase":null,
                "latitude":null,
                "longitude":null,
                "shell_location":"/All Properties/Site_1"
            }
        ],
        "message":
        [ ""
        ],
        "status":200
    }
```


3) If incorrect shell_type is provided in filter condition, then Error with status 2051 and message "Invalid Shell Type : input shell type " would be the Response.


```
    {
        "data":
        [
        ],
        "message":
        [ "Invalid Shell Type : Buildings_1"
        ],
        "status":2051
    }
```


Get Shell supports all options available through the user interface, including:

- Currency
  - All currencies added by the user
- Options
  - Phase, Email Address, Send Notifications To (list of emails), Document Manager Attribute Form, E-Signature Type, Time Zone, Financial Period, Template Name
- Links
  - Any links added by the user
- Default Calendar
- Custom Print Template
- Gateway Integration
  - Project ID
- Primavera Integration
  - Project ID
- View Forms
  - Form Name, Permission Structure

WBS Sheet

Create WBS Code

POST /ws/rest/service/v2/wbs

Purpose: Create WBS Codes in a specific shell from a different system.

> **Note**: If you are creating a WBS sheet/codes manually by using the REST service, do not include a period (".") in the name of the shell when you create the shell. Because the shell name becomes part of the WBS path and WBS does not currently accept periods, the shell name cannot contain periods.

Permissions:

The user must have the required WBS Sheet Services permissions under the Activity Manager.

Mandatory fields for this API include “source”, “project_number”, “sourceProjectId”, “wbsCode”, “wbsName”, “wbsPath”, and “sheetType”, while “removeUnreferencedData”, “ETCTechnique”, “PerformanceFactor”, “isETCApplicableToChild”, and “wbsStatus” are optional.

Input (Manual Sheet Type):

```
{
    "options": {
        "source": "Others",
        "project_number": "P-0056", // Manual
       "removeUnreferencedData":false,
        "sheetType": "manual"
    },
    "data": [
     {
            "uuu_cmwbs_code": "A1083",
            "uuu_cmwbs_name": "WBS1",
            "uuu_P6WBSPath": "P-0056.A1083",
            "uuu_cmwbs_status": "Active",
            "uuu_P6ETCComputeType": 4,
            "uuu_P6ETCUserValue": 5,
            "isETCApplicableToChild" : true
        },
             {
              "uuu_cmwbs_code": "A1084",
```

```
            "uuu_cmwbs_name": "WBS2",
            "uuu_P6WBSPath": "P-0056.A1083.A1084",
            "uuu_cmwbs_status": "Active",
            "uuu_P6ETCComputeType": 4,
            "uuu_P6ETCUserValue": 5,
            "isETCApplicableToChild" : true
        }
    ]
}
```


Output (Manual Sheet Type):


```
{
    "data": [
        {
            "id": 28852,
            "uuu_cmwbs_code": "A1084",
            "uuu_cmwbs_name": "WBS2",
            "uuu_P6WBSPath": "P-0056.A1083.A1084",
            "uuu_cmwbs_status": "Active",
            "uuu_P6ETCComputeType": 4,
            "uuu_P6ETCUserValue": 0.01
        },
        {
            "id": 28851,
            "uuu_cmwbs_code": "A1083",
            "uuu_cmwbs_name": "WBS1",
            "uuu_P6WBSPath": "P-0056.A1083",
            "uuu_cmwbs_status": "Active",
            "uuu_P6ETCComputeType": 4,
            "uuu_P6ETCUserValue": 0.01
        }
    ],
    "message": [
        "success"
```

```
    ],
    "status": 200,
    "rest_audit_id": 11870
}
```

> **Note:** For the Manual Sheet Type, the source should always be "Others".

Input (System Sheet Type):

```
{
    "options": {
        "source": "Primavera Cloud",
       "sourceProjectId": "WBSSystem", // System
        "project_number": "P-0056", // Manual
       "removeUnreferencedData":false,
        "sheetType": "System"
    },
    "data": [
     {
            "uuu_cmwbs_code": "A1083",
            "uuu_cmwbs_name": "WBS1",
            "uuu_P6WBSPath": "WBSSystem.A1083",
            "uuu_cmwbs_status": "Active",
            "uuu_P6ETCComputeType": 4,
            "uuu_P6ETCUserValue": 5,
            "isETCApplicableToChild" : true
        },
             {
            "uuu_cmwbs_code": "A1084",
            "uuu_cmwbs_name": "WBS2",
            "uuu_P6WBSPath": "WBSSystem.A1083.A1084",
            "uuu_cmwbs_status": "Active",
            "uuu_P6ETCComputeType": 4,
            "uuu_P6ETCUserValue": 5,
            "isETCApplicableToChild" : true
```

```
        }
    ]
}
```


Output (System Sheet Type):


```
{
    "data": [
        {
            "id": 28852,
            "uuu_cmwbs_code": "A1084",
            "uuu_cmwbs_name": "WBS2",
            "uuu_P6WBSPath": "WBSSystem.A1083.A1084",
            "uuu_cmwbs_status": "Active",
            "uuu_P6ETCComputeType": 4,
            "uuu_P6ETCUserValue": 0.01
        },
        {
            "id": 28851,
            "uuu_cmwbs_code": "A1083",
            "uuu_cmwbs_name": "WBS1",
            "uuu_P6WBSPath": "WBSSystem.A1083",
            "uuu_cmwbs_status": "Active",
            "uuu_P6ETCComputeType": 4,
            "uuu_P6ETCUserValue": 0.01
        }
    ],
    "message": [
        "success"
    ],
    "status": 200,
    "rest_audit_id": 11868
}
```


Note: For the System Sheet Type, the source can be “Primavera Cloud” or “P6”.

Get External WBS Sheet Data

GET /ws/rest/service/v2/wbs?project_number={project number}&sourceProjectId={sourceProjectId}

Purpose:

Retrieve externally synced WBS Sheet data in a specified Unifier Shell based on the source_project_id and project_number provided in the request parameters.

Retrieve WBS Sheet data for a manual WBS Sheet based on the project_number provided in the request.

Permissions:

The user must have the required WBS Sheet Services permissions under the Activity Manager.

Details:

There are two types of WBS Code data the user can get from the source application.

- Manual (sourceProjectId is not required. Only project_number is required.)

/ws/rest/service/v2/wbs?project_number={project number}

- System (sourceProjectId and project_number are required fields.)

/ws/rest/service/v2/wbs?project_number={project number}&sourceProjectId={sourceProjectId}

This API will fetch the current WBS Code data for both types based on the request pattern.

Sample Response:


```
{
    "data": [
        {
            "id": 28853,
            "uuu_cmwbs_code": "A1083",
            "uuu_cmwbs_name": "WBS1",
            "uuu_P6WBSPath": "P-0056.A1083",
            "uuu_cmwbs_status": "Active",
            "uuu_P6ETCComputeType": 4,
            "uuu_P6ETCUserValue": 0.01
        },
        {
            "id": 28854,
            "uuu_cmwbs_code": "A1084",
            "uuu_cmwbs_name": "WBS2",
            "uuu_P6WBSPath": "P-0056.A1083.A1084",
```

```
            "uuu_cmwbs_status": "Active",
            "uuu_P6ETCComputeType": 4,
            "uuu_P6ETCUserValue": 0.01
        }
    ],
    "message": [
        "success"
    ],
    "status": 200,
    "rest_audit_id": 11873
}
```

Master Rate Sheet

Create and Update Resources in the Master Rate Sheet

POST /ws/rest/service/v2/rate/sheet/resources

Purpose:

Create or update Resources in the Master Rate Sheet.

This POST service includes the creation and updating of Resources. Resources cannot be removed once they are created under the Master Rate Sheet.

There is no PUT or delete API for this.

Prerequisites:

- rateType and costType are optional fields in the ratesBreakdown Array. If they are not entered, Standard and Direct will be the default breakdown for the Rates.
- There should be a unique combination of Rate Type and Cost Type in the request payload. If there is more than one entry with the same combination and different Rates, you should receive an error message.
- The user must have the necessary permissions to run this service.

> **Note:** All the allowed values for API parameters are case-sensitive.

Input:

```
{
  "options": {
        "source": "Primavera Cloud"
    },
    "data": [
```

```
{
    "resourceCode": "Child1Rate4",
    "resourceName": "Child1Rate4",
    "workspaceCode": "NON_PROD3",
    "parentResourceCode": "Parent",
    "resourceType": "Labor",
    "resourceCurrency": "USD",
    "resourceStatus": "Active",
    "unitsPerTime": 10,
    "rates": [
        {
            "resourceEffectiveDate": "2020-02-03",
            "ratesBreakdown": [
                {
                   "resourceStandardRate": 100,
                   "costType": "Food",
                   "rateType": "Direct"
                },
                {
                   "resourceStandardRate": 100
                }
            ]
       },

        {
          "resourceEffectiveDate": "2020-02-05",
           "ratesBreakdown" : [
               {
                    "resourceStandardRate": 50,
                    "costType" : "Food",
                    "rateType" : "Direct"
               },
               {
```

```
                        "resourceStandardRate": 100,
                        "costType" : "Standard",
                        "rateType" : "Indirect"
                    }
                ]
            }
        ]
    }

]
}
```

Output:


```
{
    "data": [
        {
            "resourceStatus": "Active",
            "resourceCurrency": "USD",
            "resourceCode": "Child1Rate4",
            "workspaceCode": "NON_PROD3",
            "unitsPerTime":10,
            "rates": [
                {
                    "ratesBreakdown": [
                        {
                            "rateType": "Direct",
                            "costType": "Food",
                            "id": 920,
                            "resourceStandardRate": 100.0
                        },
                        {
                            "rateType": "Direct",
                            "costType": "Standard",
                            "id": 921,
```

```
                        "resourceStandardRate": 100.0
                    }
                ],
                "resourceEffectiveDate": "2020-02-03",
                "id": 913
            },
            {
                "ratesBreakdown": [
                    {
                        "rateType": "Direct",
                        "costType": "Food",
                        "id": 922,
                        "resourceStandardRate": 50.0
                    },
                    {
                        "rateType": "Indirect",
                        "costType": "Standard",
                        "id": 923,
                        "resourceStandardRate": 100.0
                    }
                ],
                "resourceEffectiveDate": "2020-02-05",
                "id": 914
            }
        ],
        "resourceName": "Child1Rate4",
        "id": 118,
        "parentResourceCode": "Parent",
        "resourceType": "Labor"
    }
],
"message": [
    "success"
],
```

```
    "status": 200,
    "rest_audit_id": 1234
}
```

Error Response:

```
{
    "data": [],
    "message": [
        "The API request is missing the required information:
[resourceCode]."
    ],
    "status": 12400,
    "rest_audit_id": 1396
}
```

Create and Update Roles in the Master Rate Sheet

POST /ws/rest/service/v2/rate/sheet/roles

Purpose:

Create or update Roles in the Master Rate Sheet.

This POST service includes the creation and updating of Roles. Roles created under the Master Rate Sheet cannot be removed.

There is no PUT or delete API for this.

Prerequisites:

The user must have the necessary permissions to run this service.

Input:

```
{
  "options":{
      "source": "Primavera Cloud"
   },
  "data":[
     {
        "roleCode":"Manager",
        "roleName": "Manager",
        "workspaceCode": "Workspace1",
        "unitsPerTime":150,
```

```
        "roleCurrency": "USD",
        "roleStatus":"Active",
        "rates": [
               {
                    "roleEffectiveDate": "2020-02-01",
                    "ratesBreakdown" : [
                        {
                           "roleStandardRate": 100 ,
                           "costType":"Food",
                           "rateType":"Direct"
                        },
                         {
                           "roleStandardRate": 100
                        }
                    ]
               },
                {
                    "roleEffectiveDate": "2018-02-01",
                    "ratesBreakdown" : [
                        {
                           "roleStandardRate": 100 ,
                           "costType":"Food",
                           "rateType":"Direct"
                        },
                         {
                           "roleStandardRate": 100
                        }
                    ]
               }
        ]
    }
]
```

```
 }
```

Output:


```
{
    "data": [
        {
            "roleCurrency": "USD",
            "unitsPerTime": 150,
            "roleCode": "Manager",
            "workspaceCode": "Workspace1",
            "rates": [
                {
                    "ratesBreakdown": [
                        {
                            "roleStandardRate": 100.0,
                            "rateType": "Direct",
                            "costType": "Food",
                            "id": 1568
                        },
                        {
                            "roleStandardRate": 100.0,
                            "rateType": "Direct",
                            "costType": "Standard",
                            "id": 1569
                        }
                    ],
                    "id": 1247,
                    "roleEffectiveDate": "2020-02-01"
                },
                {
                    "ratesBreakdown": [
                        {
                            "roleStandardRate": 100.0,
                            "rateType": "Direct",
```

```
                            "costType": "Food",
                            "id": 1570
                        },
                        {
                            "roleStandardRate": 100.0,
                            "rateType": "Direct",
                            "costType": "Standard",
                            "id": 1571
                        }
                    ],
                    "id": 1248,
                    "roleEffectiveDate": "2018-02-01"
                }
            ],
            "roleName": "Manager",
            "id": 92,
            "roleStatus": "Active"
        }
    ],
    "message": [
        "success"
    ],
    "status": 200,
    "rest_audit_id": 2242
}
```


Error Response:


```
{
    "data": [],
    "message": [
        "The API request contains empty value for: [roleCode]."
    ],
    "status": 12422,
    "rest_audit_id": 1395
```

```
}
```

Get Resources from the Master Rate Sheet

GET /ws/rest/service/v2/rate/sheet/resources?source={sourceApplication}

Purpose:

Retrieve the list of resources synced from a source application based on the source provided in the request.

Prerequisites:

The user has access to fetch the data.

Input:

```
https://<SERVER_URL>/rest1/ws/rest/service/v2/rate/sheet?source="Primavera Cloud"
```

Output (Oracle Primavera Cloud):


```
{
    "data": [
        {
            "resourceStatus": "Active",
            "unitsPerTime": 1.0,
            "resourceCurrency": "USD1",
            "resourceCode": "RateDemo5",
            "workspaceCode": "NON_PROD2",
            "rates": [
                {
                    "ratesBreakdown": [
                        {
                            "rateType": null,
                            "costType": null,
                            "id": 901,
                            "resourceStandardRate": 100.1234567890124
                        },
                        {
                            "rateType": null,
                            "costType": null,
                            "id": 902,
```

```
                    "resourceStandardRate": 120.0
                }
            ],
            "resourceEffectiveDate": "2020-02-03T00:00:00",
            "id": 902
        },
        {
            "ratesBreakdown": [
                {
                    "rateType": null,
                    "costType": null,
                    "id": 903,
                    "resourceStandardRate": 50.0
                },
                {
                    "rateType": null,
                    "costType": null,
                    "id": 904,
                    "resourceStandardRate": 100.0
                }
            ],
            "resourceEffectiveDate": "2020-02-05T00:00:00",
            "id": 903
        }
    ],
    "resourceName": "RateDemo5",
    "id": 111,
    "parentResourceCode": "Parent",
    "resourceType": "Labor"
},
{
    "resourceStatus": "Active",
    "unitsPerTime": 1.0,
    "resourceCurrency": "USD",
```

```
"resourceCode": "30May12",
"workspaceCode": "NON_PROD2",
"rates": [
    {
        "ratesBreakdown": [
            {
                "rateType": "Direct",
                "costType": "Food",
                "id": 1040,
                "resourceStandardRate": 100.0
            },
            {
                "rateType": "Indirect",
                "costType": "Standard",
                "id": 1041,
                "resourceStandardRate": 20.12
            }
        ],
        "resourceEffectiveDate": "2024-02-03T00:00:00",
        "id": 984
    },
    {
        "ratesBreakdown": [
            {
                "rateType": "Direct",
                "costType": "Food",
                "id": 1042,
                "resourceStandardRate": 500.98
            },
            {
                "rateType": "Indirect",
                "costType": "Standard",
                "id": 1043,
                "resourceStandardRate": 60.23
```

```
                        }
                    ],
                    "resourceEffectiveDate": "2025-02-05T00:00:00",
                    "id": 985
                }
            ],
            "resourceName": "30May12update2222",
            "id": 183,
            "parentResourceCode": "Parent",
            "resourceType": "Nonlabor"
        }
    ],
    "message": [
        "success"
    ],
    "status": 200,
    "rest_audit_id": 1929
}
```


Output (P6):


```
{
    "data": [
        {
            "resourceStatus": "Active",
            "unitsPerTime": 1.0,
            "resourceCurrency": "USD",
            "resourceCode": "Child4",
            "rates": [
                {
                    "resourceEffectiveDate": "2020-02-03T00:00:00",
                    "id": 1020
                }
            ],
            "resourceName": "Child4",
```

```
            "id": 211,
            "parentResourceCode": "",
            "resourceType": "Labor"
        },
        {
            "resourceStatus": "Active",
            "unitsPerTime": 100.0,
            "resourceCurrency": "INR",
            "resourceCode": "P6C2",
            "rates": [
                {
                    "ratesBreakdown": [
                        {
                            "rateType": "Direct",
                            "costType": "Food",
                            "id": 1238,
                            "resourceStandardRate": 30.5
                        },
                        {
                            "rateType": "Indirect",
                            "costType": "Food",
                            "id": 1239,
                            "resourceStandardRate": 100.0
                        }
                    ],
                    "resourceEffectiveDate": "2020-02-03T00:00:00",
                    "id": 1093
                }
            ],
            "resourceName": "C2update",
            "id": 229,
            "parentResourceCode": "p6res",
            "resourceType": "Nonlabor"
        }
```

```
    ],
    "message": [
        "success"
    ],
    "status": 200,
    "rest_audit_id": 1930
}
```


Output (Other):


```
{
    "data": [
        {
            "resourceStatus": "Active",
            "unitsPerTime": 1.0,
            "resourceCurrency": "USD",
            "resourceCode": "res2",
            "rates": [
                {
                    "ratesBreakdown": [
                        {
                            "rateType": "Direct",
                            "costType": "Standard",
                            "id": 12,
                            "resourceStandardRate": 33.8
                        }
                    ],
                    "resourceEffectiveDate": "2022-06-01T00:00:00",
                    "id": 12
                },
                {
                    "ratesBreakdown": [
                        {
                            "rateType": "Direct",
                            "costType": "Standard",
```

```
                "id": 27,
                "resourceStandardRate": 40.0
            }
        ],
        "resourceEffectiveDate": "2022-05-27T00:00:00",
        "id": 27
    },
    {
        "ratesBreakdown": [
            {
                "rateType": "Direct",
                "costType": "Standard",
                "id": 30,
                "resourceStandardRate": 10.0
            }
        ],
        "resourceEffectiveDate": "2022-04-29T00:00:00",
        "id": 30
    },
    {
        "ratesBreakdown": [
            {
                "rateType": "Direct",
                "costType": "Food",
                "id": 10,
                "resourceStandardRate": 10.0
            }
        ],
        "resourceEffectiveDate": "2022-06-23T00:00:00",
        "id": 10
    },
    {
        "ratesBreakdown": [
            {
```

```
                    "rateType": "Direct",
                    "costType": "Standard",
                    "id": 11,
                    "resourceStandardRate": 5.0
                }
            ],
            "resourceEffectiveDate": "2022-06-21T00:00:00",
            "id": 11
        },
        {
            "ratesBreakdown": [
                {
                    "rateType": "Direct",
                    "costType": "Standard",
                    "id": 87,
                    "resourceStandardRate": 50.0
                }
            ],
            "resourceEffectiveDate": "2020-04-01T00:00:00",
            "id": 87
        },
        {
            "ratesBreakdown": [
                {
                    "rateType": "Direct",
                    "costType": "Standard",
                    "id": 90,
                    "resourceStandardRate": 20.0
                }
            ],
            "resourceEffectiveDate": "2019-10-31T00:00:00",
            "id": 90
        }
    ],
```

```
            "resourceName": "Resource2",
            "id": 9,
            "parentResourceCode": "",
            "resourceType": "Labor"
        },

        {
            "resourceStatus": "Active",
            "unitsPerTime": 1.0,
            "resourceCurrency": "USD",
            "resourceCode": "NonLabor",
            "rates": [],
            "resourceName": "NonLabor",
            "id": 223,
            "parentResourceCode": "res2",
            "resourceType": "Nonlabor"
        }
    ],
    "message": [
        "success"
    ],
    "status": 200,
    "rest_audit_id": 1931
}
```


Error Response:


```
{
    "data": [],
    "message": [
        "Invalid value was found in a field: 'source'. Allowed values:
[Primavera Cloud]"
     ],
    "status": 12008,
    "rest_audit_id": 4633
}
```

Get Roles from the Master Rate Sheet

GET /ws/rest/service/v2/rate/sheet/roles?source={sourceApplication}

Purpose:

Retrieve the list of roles synced from a source application based on source provided in the request.

Prerequisites:

The user has access to fetch the data.

Input:

```
https://<SERVER_URL>/rest1/ws/rest/service/v2/rate/sheet?source="Primavera Cloud"
```

Output (Oracle Primavera Cloud):


```
{
    "data": [
        {
            "roleCurrency": "USD",
            "unitsPerTime": 1.0,
            "roleCode": "Root1",
            "workspaceCode": "Workspace1",
            "rates": [
                {
                    "ratesBreakdown": [
                        {
                            "roleStandardRate": 30.5,
                            "rateType": "Direct",
                            "costType": "Food",
                            "id": 1100
                        },
                        {
                            "roleStandardRate": 100.0,
                            "rateType": "Indirect",
                            "costType": "Food",
                            "id": 1101
                        }
```

```
                ],
                "id": 1014,
                "roleEffectiveDate": "2020-02-03T00:00:00"
            }
        ],
        "roleName": "Root1",
        "id": 28,
        "parentRoleCode": "",
        "roleStatus": "Active"
    },

    {
        "roleCurrency": "USD",
        "unitsPerTime": 1.0,
        "roleCode": "ChildRole1",
        "workspaceCode": "Workspace1",
        "rates": [
            {
                "ratesBreakdown": [
                    {
                        "roleStandardRate": 30.5,
                        "rateType": "Direct",
                        "costType": "Standard",
                        "id": 1098
                    },
                    {
                        "roleStandardRate": 100.0,
                        "rateType": "Indirect",
                        "costType": "Food",
                        "id": 1099
                    }
                ],
                "id": 1013,
```

```
                    "roleEffectiveDate": "2020-02-03T00:00:00"
                }
            ],
            "roleName": "ChildRoleupdate2",
            "id": 27,
            "parentRoleCode": "Root1",
            "roleStatus": "Active"
        }
    ],
    "message": [
        "success"
    ],
    "status": 200,
    "rest_audit_id": 1932
}
```


Output (P6):


```
{
    "data": [
        {
            "roleCurrency": "USD",
            "unitsPerTime": 10.0,
            "roleCode": "APIP6Role2C1",
            "rates": [
                {
                    "ratesBreakdown": [
                        {
                            "roleStandardRate": 100.0,
                            "rateType": "Direct",
                            "costType": "Food",
                            "id": 1165
                        },
                        {
                            "roleStandardRate": 100.0,
```

```
                        "rateType": "Direct",
                        "costType": "Standard",
                        "id": 1166
                    }
                ],
                "id": 1053,
                "roleEffectiveDate": "2020-02-01T00:00:00"
            }
        ],
        "roleName": "APIP6Role2C1update",
        "id": 49,
        "parentRoleCode": "APIP6Role2",
        "roleStatus": "Active"
    },
    {
        "roleCurrency": "USD",
        "unitsPerTime": 200.0,
        "roleCode": "APIP6Role2",
        "rates": [
            {
                "ratesBreakdown": [
                    {
                        "roleStandardRate": 100.0,
                        "rateType": "Direct",
                        "costType": "Food",
                        "id": 1169
                    },
                    {
                        "roleStandardRate": 100.0,
                        "rateType": "Direct",
                        "costType": "Standard",
                        "id": 1170
                    }
                ],
```

```
                    "id": 1055,
                    "roleEffectiveDate": "2020-02-01T00:00:00"
                }
            ],
            "roleName": "APIP6Role2update",
            "id": 50,
            "parentRoleCode": "",
            "roleStatus": "Active"
        }
    ],
    "message": [
        "success"
    ],
    "status": 200,
    "rest_audit_id": 1933
}
```


Output (Other):


```
{
    "data": [
        {
            "roleCurrency": "USD",
            "unitsPerTime": 150.0,
            "roleCode": "r1",
            "rates": [
                {
                    "ratesBreakdown": [
                        {
                            "roleStandardRate": 100.0,
                            "rateType": "Direct",
                            "costType": "Food",
                            "id": 1288
                        },
                        {
```

```
                    "roleStandardRate": 100.0,
                    "rateType": "Direct",
                    "costType": "Standard",
                    "id": 1289
                }
            ],
            "id": 1118,
            "roleEffectiveDate": "2020-02-01T00:00:00"
        },
        {
            "ratesBreakdown": [
                {
                    "roleStandardRate": 100.0,
                    "rateType": "Direct",
                    "costType": "Food",
                    "id": 1290
                },
                {
                    "roleStandardRate": 100.0,
                    "rateType": "Direct",
                    "costType": "Standard",
                    "id": 1291
                }
            ],
            "id": 1119,
            "roleEffectiveDate": "2018-02-01T00:00:00"
        }
    ],
    "roleName": "Role1 update",
    "id": 3,
    "parentRoleCode": "r2",
    "roleStatus": "Active"
}
```

```
    ],
    "message": [
        "success"
    ],
    "status": 200,
    "rest_audit_id": 1934
}
```

Error Response:

```
{
    "data": [],
    "message": [
        "Invalid value was found in a field: 'source'. Allowed values:
[Primavera Cloud]"
     ],
    "status": 12008,
    "rest_audit_id": 4633
}
```

Cash Flow

Create Snapshot in Cashflow Curve

POST /ws/rest/service/v2/cashflow/snapshot

Purpose:

Create a snapshot for an existing cashflow detail curve in a specific shell from a different system. After a successful REST API call, the snapshot should be created with the specified name in the curve, and the snapshot log should show the entry.

Prerequisites:

Full Access and **Update** permissions for the user are mandatory to allow the creation of snapshots at the cashflow curve level.

Only one snapshot can be created at a time.

> **Note:** This API is only applicable to cashflow detail curves.

Sample Request:

```
{
```

```
"options" :
  {
        "project_number" :1001,
        "name" : "CashFlow By CBS",


    },
 "data":[
      {
         "snapshot_name":"May8th snapshot"

      }
```

Sample Response:

```
{
                              "data" : [ ] ,
                              "status: : 200,
                              "message": "success" ,
                              "rest_audit_id": 1210
                        }
```

Note: The snapshot name is also included in the response.

Delete Snapshot from Cashflow Curve

PUT /ws/rest/service/v2/cashflow/delete/snapshot

Purpose:

Delete one or more snapshots for an existing cashflow detail curve in a specific shell from a different system.

Prerequisites:

Full Access or **Update Cashflow** permissions for the user are mandatory to allow the deletion of snapshots at the cashflow curve level.

Notes:

- This API is only applicable to cashflow detail curves.
- If the specified snapshot name does not exist in the cashflow, the system will throw an error response.

Sample Request:

```
{
"options" :
  {
        "project_number" :1001,
        "name" : "CashFlow By CBS"
    },
 "data":[
      {
         "snapshot_name":["May8th Snapshot", "April Snapshot"]
       }
```

Sample Response (All snapshot names valid, successful deletion):

```
"data": {
        "Name": [
            "CashFlow By CBS"
        ],
        "snapshot_name": [
            "May8th Snapshot",
                  "April Snapshot"
        ]
    },
    "message": [
        "success"
    ],
    "status": 200,
    "rest_audit_id": 2383
}
```

Sample Response (Valid and invalid snapshot names):

```
{
```

```
    "data": {
        "Name": [
            "Variance test"
        ],
        "snapshot_name": [
            "May8th Snapshot"
        ]
    },
    "message": [
        "Snapshot(s) May40th Snapshot does not exists in the cash flow curve
Variance test."
    ],
    "status": 13009,
    "rest_audit_id": 2653
}
```


Sample Response (All snapshot names invalid):


```
{
    "data": [],
    "message": [
        "Snapshot(s) May50th Snapshot, May60th Snapshot do not exist in the
selected cash flow curve Variance test."
    ],
    "status": 13008,
    "rest_audit_id": 2654
}
```


Get Snapshot Names for the Selected Cashflow

GET /ws/rest/service/v2/cashflow/snapshot?project_number={project number}&name={cashflow name}

Purpose:

Retrieve snapshot names for an existing cashflow detail curve in a specific shell from a different system.

Prerequisites:

GET permissions for the user are mandatory to allow access to snapshots at the cashflow curve level.

Note: This API is only applicable to cashflow detail curves.

Sample Response:


```
{

 "data" : [
        {
           "name": "Project_CF",
           "snapshot_name" : ["May8th Snapshot", "April Snapshot"]
        }
    ],
    "message": [
        "success"
    ],
    "status": 200,
    "rest_audit_id": 5892
}
```


Activities and Assignments

Create, Update, and Remove Assignments

POST /ws/rest/service/v2/activity/sheet/assignments

Purpose

Create, update, and remove Assignments in the Activity Sheet in a specified Shell based on sourceProjectID, project_number, and the Activity Sheet provided in the input parameters.

Prerequisites

This REST service is specific to updating externally synced Assignment data from other applications. It excludes Manual Activity Sheets, which are generated inside the system. Therefore, sourceProjectID should be configured or added in the user interface tab **Shell Details** → **Primavera Cloud Integration**.

- For the System Activity Sheet, sourceProjectID (the projectID of the external application) should already exist. If not, use the Mapped Projects API.
- The Activity Sheet exists and has activities that need Assignments created, updated, or removed.
- Cost Codes are defined in the Cost Sheet.
- The user has the necessary Activity Sheet Services Permissions in the Activity Manager.

Notes:

- There is no GET or PUT service for this API.
- The Planned Cost, Actual Cost, Remaining Cost, and At Completion Cost values in the Assignments tab are calculated and populated when you trigger Recost.
- The Rate source, Resource and Role, Planning PricePerUnit, and Actuals PricePerUnit values are populated during Recost. The value is 0 before Recost is triggered.
- Recost only works for the System Activity Sheet if the Assignment Spread is present.
- Scheduling handles spread generation and Recost for the Manual Activity Sheet.
- Inactive resources or roles can be assigned via the System Activity Sheet. This is not available in the Manual Activity Sheet.
- All Timestamp related fields exclusively accept hour formats in the Manual Activity Sheet. Any minutes included in a request are ignored.
- Fixed Duration is the only supported duration type for activities inserted via this REST service.
- actualDuration is a calculated field for Manual Activity Sheet Assignments and is populated when scheduling the sheet.
- The profile for a supported Assignment is always linear.
- Validations are not implemented for System Activity Sheet data assuming the data from the source system is sent properly.

Request Format

Send an API Request as a JSON map with the following structure:

```
{
    "options":{},
    "data":[]
}
```

Request Parameters Supported in "options" JSON Map

The "options" JSON map can include the following parameters:

```
"options":
              {"source": "<value>",
               "project_number": "<value>",
               "sourceProjectId":"<value>",
```

```
        "activitySheetType": "<value>",
        "projectType": "<value>",
        "activitySheetName": "<value>",
        "removeUnreferencedData": "<value>"
    }
```

The following request parameters can be included in the "options" JSON map :

Request Parameter	Mandatory?	Data Type	Description
source	Yes	String	The external application from which Assignment data is pulled to be populated. Valid values include: "Primavera Cloud", "P6", and "Others"
project_number	Yes	String	The valid 'Active' Unifier Shell number that is to be updated with project details.
sourceProjectId	Yes	String	The project code in the source application. It is always the current Project Id for system and project number for manual.
activitySheetType	Yes	String	Indicate type of activity sheet type. Valid values include: system and manual. For Primavera Cloud integrations,specify "system" to insert data into the System Activity Sheet.
projectType	Yes	String	The type of project for which the assignments have to be created. Valid values include:Current and Baseline.

Request Parameter	Mandatory?	Data Type	Description
activitySheetName	No	String	Specify this parameter if you have selected the"activitySheetType" parameter value as "manual" This parameter checks for any existing manual activity sheet with the same name. Assignments are then removed or added for the activities in that activity sheet. Ignore this parameter if the "activitySheetType" parameter value is set as "system".
removeUnreferenced Data	No	Boolean	Valid values include: *True*: Creates & updates assignments present in the request body for the respective activity. Removes assignments that don't exist in the current request data for the respective activities passed in the API request from the existing activity sheet. *False* (default): Does not remove any assignments under an activity from the existing activity sheet. Creates assignments from the request data if they don't exist. Updates assignments if they exist.

Request Parameters Supported in the "data" JSON List [ ]

The "data" JSON list can contain one or more JSON maps in the following format:

```
{
    "options":{},
    "data":[
              {
                 "activityId": "<value>",
                 "rateSource": "<value>",
                 "workspaceCode": "<value>",
                 "resourceCode": "<value>",
                 "roleCode": "<value>",
                 "plannedPricePerUnit": "<value>",
```

```
                "actualsPricePerUnit": "<value>",
                "plannedUnits": "<value>",
                "actualUnits": "<value>",
                "atCompletionUnits": "<value>",
                "remainingUnits": "<value>",
                "costCode": "<value>",
                "plannedStart": "<value>",
                "plannedFinish": "<value>",
                "plannedDuration": "<value>",
                "actualStart": "<value>",
                "actualFinish": "<value>",
                "remainingStart": "<value>",
                "remainingFinish": "<value>",
                "remainingDuration": "<value>",
                "start": "<value>",
                "finish": "<value>",
                "duration": "<value>",
                "plannedUnitsPerTime": "<value>",
                "remainingUnitsPerTime": "<value>",
                "profile": "<value>"
            }
        ]
}
```

The following parameters can be included in the "data" JSON list [ ] :

Request Parameter	Mandatory?	Data Type	Description
activityId	Yes	String	The unique Id or code of the Activity in the activity sheet.
rateSource	Yes	String	Determines whether the source for price/unit is Resource or Role or Override. Valid values include: "Resource", "Role" and "Override".

Request Parameter	Mandatory?	Data Type	Description
workspaceCode	Yes, if the source is Primavera Cloud	String	If the project is integrated from Primavera Cloud application, specify the code of the workspace where the resource/role is available. This is mandatory field if source is Primavera Cloud
resourceCode	Yes, if the rateSource value is "Resource"	String	The unique identifier for the resource.
roleCode	Yes, if the rateSource value is "Role"	String	The unique identifier for the role.
plannedPricePerUnit	No	Double	▸ This is updated only if the RateSource is set to "Override". Otherwise, it is ignored. ▸ Defaults to zero if the value is not provided in the API request and the RateSource is override. ▸ If the value is not provided in the API request and the RateSource is "role" or "resource", then it is zero. The value will be populated from the Master Rate Sheet after you complete scheduling or recosting.
actualsPricePerUnit	No	Double	▸ This is updated only if the RateSource is set to "Override". Otherwise, it is ignored. ▸ Defaults to zero if the value is not provided in the API request and the RateSource is override. ▸ If the value is not provided in the API request and the RateSource is "role" or "resource", then it is zero. The value will be populated from the Master Rate Sheet after you complete scheduling or recosting.

Request Parameter	Mandatory?	Data Type	Description
plannedUnits	No	Double	**System Activity Sheets** If a value is not provided, it defaults to zero. **Manual Activity Sheets** ▸ If a value is provided, check if PlannedUnits = PlannedDuration X PlannedUnitPerTime. Otherwise, it displays an error. ▸ If a value is not provided, it is updated as PlannedDuration X PlannedUnitPerTime.
actualUnits	Yes if the Activity status is " In Progress" or "Completed".	Double	**System Activity Sheets** If a value is not provided, it defaults to zero. **Manual Activity Sheets** If status = Not Started: ▸ If its provided in the API request for the assignment, then Activity Status will be changed to 'In Progress'. If status = Completed: ▸ This can be updated from the API request
atCompletionUnits	No	Double	**System Activity Sheets** If a value is not provided, it defaults to zero. **Manual Activity Sheets** ▸ If activities with statuses, *Not Started* or *In Progress*, are included in the request, check if: AtCompletionsUnits = RemainingUnits + ActualUnits. Otherwise displays an error. ▸ If completed activities are included in the request, check if: AtCompletionsUnits = ActualUnits. , Otherwise displays an error. ▸ If it is not provided in the request, it is updated as RemainingUnits + ActualUnits.

Request Parameter	Mandatory?	Data Type	Description
remainingUnits	No	Double	**System Activity Sheets** If a value is not provided, it defaults to zero. **Manual Activity Sheets** ▸ If activities with statuses, *Not Started* or *In Progress*, are included in the request, check if: RemainingUnits = RemainingDuration X RemainingUnitsPerTime. Otherwise, displays an error. ▸ If it is not provided in the request, it is updated as: RemainingDuration X RemainingUnitsPerTime. ▸ Activities with *Completed* statues are ignored if provided.
costCode	No	String	Specify the full path of the CBS Code with entire hierarchy present in Cost Sheet, has to be given. Use "~~" will be used as path separators for the hierarchy. ▸ For a new Resource/Role created, displays an error message for an inactive costCode. ▸ For an update to an existing Resource/Role, compares the existing costCode for that assignment. If the costCode is identical, it will not be updated. Otherwise, displays an error message for the inactive costCode.
For **Manual Activity Sheet Assignments**, specify the following request parameters			
plannedStart	No	Timestamp	The plannedStart is determined as follows: ▸ If the plannedStart is not included in the request, defaults to the Activity PlannedStart. ▸ Displays an error if the updated PlannedStart is less than Activity PlannedStart.

Request Parameter	Mandatory?	Data Type	Description
plannedFinish	No	Timestamp	The plannedFinish is determined as follows: ▸ If the plannedFinish is not included in the request, defaults to the Activity PlannedFinish. ▸ If PlannedFinish of the Assignment is greater than the Activity PlannedFinish, the Activity PlannedFinish is also updated.
plannedDuration	No	Integer	The plannedDuration is determined as follows: ▸ If included in the request, checks if PlannedDuration = PlannedFinish - PlannedStart. Otherwise, displays an error message. ▸ If the plannedDuration is not included in the request, it is calculated as: PlannedFinish - PlannedStart.
actualStart	No	Timestamp	If the ActivityStatus is In Progress or Completed and is less than the Activity ActualStart then the Activity ActualStart is also updated. If its not provided in the request then it is updated as the Activity ActualStart.
actualFinish	No	Timestamp	If ActivityStatus is Completed and the ActualFinish of the Assignment in the request is greater than the Activity ActualFinish then the Activity ActualFinish is also updated. If it is not provided in the request then it is updated as the Activity ActualFinish

Request Parameter	Mandatory?	Data Type	Description
remainingStart	No	Timestamp	When ActivityStatus is Not Started: ▸ If it is included in the request, it checks if the RemainingStart is same as Assignment Planned Start. Otherwise, displays an error message. ▸ If it is not provided in the request, then it is updated as the Assignment Planned Start. When ActivityStatus is In Progress: ▸ If it is included in the request, it checks if it is less than Activity Remaining Start. Otherwise, displays an error message. ▸ If it is not provided in the request, then it is updated as the Activity Remaining Start date. If ActivityStatus is Completed, no value is assigned.
remainingFinish	No	Timestamp	If the status is Not Started: ▸ If it's included in the request , it checks if the Remaining Finish is same as the Assignment Planned Finish. Otherwise, displays an error message. ▸ If it is not included in the request, then it is updated as the Assignment Planned Finish. If status is in In Progress: ▸ If it is included in the request, it checks if it is greater than the Activity RemainingFinish, and then also updates the Activity RemainingFinish. ▸ If it is not included in the request, then it is updated as the Activity Remaining Finish. If ActivityStatus is Completed, no value is assigned.

Request Parameter	Mandatory?	Data Type	Description
remainingDuration	No	Integer	If the status is Not Started or In Progress: ▸ If it is included in the request , it checks if the remainingDuration = RemainingFinish - RemainingStart. Otherwise, displays an error message. ▸ If it is not included in the request, then it is updated as RemainingFinish - RemainingStart If the Status is Completed, it is set to zero (0)
start	No	Timestamp	If ActivityStatus is Not Started: ▸ If it is included in the request , it must be identical to the PlannedStart of the Assignment in the API. Otherwise, displays an error message. ▸ If it is not included in the request, then it is updated as the PlannedStart date of that Assignment. ▸ If both Start and PlannedStart are not included in the request, then Start is updated from the Activity PlannedStart. If ActivityStatus is In Progress orCompleted: ▸ If it is included in the request, it must be same as the ActualStart of that Assignment. Otherwise, displays an error message. ▸ If it is not included in the request, then it is updated as the ActualStart of that Assignment. If both, Start and ActualStart are not provided then Start is updated using the Activity ActualStart.

Request Parameter	Mandatory?	Data Type	Description
finish	No	Timestamp	If the ActivityStatus is Not Started: ▸ If it is provided in the request, it should be same as the PlannedFinish of that Assignment. Otherwise, displays an error message. ▸ If it is not included in the request, then it is updated as the PlannedFinish of that Assignment. ▸ If both, Finish and PlannedFinish are not provided then Finish is updated from the Activity PlannedFinish. If the ActivityStatus is In Progress Activities: ▸ If it is included in the request, it should be same as the RemainingFinish of that Assignment in the API request. Otherwise, displays an error message. ▸ If it is not included in the request, it is updated as the RemainingFinish of that Assignment. ▸ If both, Finish and RemainingFinish are not provided, then Finish is updated from the Activity RemainingFinish. If the ActivityStatus is Completed: ▸ If it is included in the request,it should be same as the ActualFinish of that Assignment in the request. Otherwise, displays an error message. ▸ If it is not included in the request, then it is updated as the ActualFinish of that Assignment. ▸ If both, Finish and ActualFinish of the Assignment are not provided, then Finish is updated from the Activity ActualFinish.

Request Parameter	Mandatory?	Data Type	Description
duration	No	Integer	If it is included in the API request, it check if Start + Duration = Finish. Otherwise, displays an error message. If it is not included in the request, it is updated as, Finish - Start.
plannedUnitsPerTime	No	Double	If it is not included in the request, then it is populated from the Master Rate Sheet.
remainingUnitsPerTime	No	Double	If ActivityStatus is Not Started: ▸ If it is included in the request, checks if it is same as the plannedUnitsPerTime. Otherwise, displays an error message. ▸ If it is not included in the request, it is populated from the Master Rate Sheet. If ActivityStatus is In Progress Activities and it is not included in the request, it is populated from the Master Rate Sheet. If ActivityStatus is Completed: ▸ When the assignment is created, it is populated with default value from the Master Rate Sheet. ▸ When the assignment is updated, this value is ignored, and not updated.
profile	No	String	The profile for the assignments. Valid value: "Linear".

Response Format

A response is returned as a JSON Map with the following elements:

```
{
   "status" : <integer value> ,
   "data" : [ ] ,
   "messages": [ <list of string>] ,
   "rest_audit_id": <id from the rest audit table matching this request>
```

```
   }
```

Sample Request (System Activity Sheet - Current Project):

```
{
   "options":{
      "project_number":"P-0016",
      "source":"Primavera Cloud",
      "sourceProjectId":"OPC10",
      "activitySheetType":"system",
      "removeUnreferencedData":true,
      "projectType": "Current"
   },
    "data": [
     {
     "activityId":"A1000",
      "roleCode":"APIOPC1",
      "rateSource": "Override",
      "workspaceCode" :"NON_PROD",
      "plannedPricePerUnit": 20.0,
      "actualsPricePerUnit":20.0,
      "plannedUnits":40,
      "actualUnits":0,
      "atCompletionUnits":40,
      "remainingUnits":50,
      "costCode": "00000~~00500",
      "profile" : "Linear"
    },
    {
     "activityId":"A1010",
      "resourceCode":"Child999",
      "rateSource": "Resource",
      "workspaceCode" :"test1",
      "plannedPricePerUnit": 20.0,
```

```
  "actualsPricePerUnit":20.0,
  "plannedUnits":40,
  "actualUnits":0,
  "atCompletionUnits":40,
  "remainingUnits":40,
  "costCode": "00000~~00500",
  "profile" : "Linear"
},
 {
 "activityId":"A1010",
  "roleCode":"APIOPC1",
  "rateSource": "Role",
  "workspaceCode" :"NON_PROD",
  "plannedPricePerUnit": 20.0,
  "actualsPricePerUnit":20.0,
  "plannedUnits":40,
  "actualUnits":0,
  "atCompletionUnits":40,
  "remainingUnits":40,
  "costCode": "00000~~00500",
  "profile" : "Linear"
},
{
 "activityId":"A1020",
  "resourceCode":"Child1Rate4",
  "rateSource": "Resource",
  "workspaceCode" :"NON_PROD3",
  "plannedPricePerUnit": 20.0,
  "actualsPricePerUnit":20.0,
  "plannedUnits":40,
  "actualUnits":0,
  "atCompletionUnits":40,
  "remainingUnits":40,
  "costCode": "00000~~00500",
```

```
      "profile" : "Linear"
    }
  ]
}
```

Sample Response (System Activity Sheet - Current Project):

For the above request, a response is returned as follows:


```
{
   "data": [
       {
           "activityID": "A1000",
           "costCode": "00000~~00500",
           "actualsPricePerUnit": 20.0,
           "actualUnits": 0,
           "plannedPricePerUnit": 20.0,
           "workspaceCode": "NON_PROD",
           "roleCode": "APIOPC1",
           "plannedUnits": 40,
           "atCompletionUnits": 40,
           "id": 514,
           "remainingUnits": 50,
           "rateSource": "Override"
       },
       {
           "activityID": "A1010",
           "costCode": "00000~~00500",
           "actualUnits": 0,
           "resourceCode": "Child999",
           "workspaceCode": "test1",
           "plannedUnits": 40,
           "atCompletionUnits": 40,
           "id": 503,
           "remainingUnits": 40,
           "rateSource": "Resource"
```

```
        },
        {
            "activityID": "A1010",
            "costCode": "00000~~00500",
            "actualUnits": 0,
            "workspaceCode": "NON_PROD",
            "roleCode": "APIOPC1",
            "plannedUnits": 40,
            "atCompletionUnits": 40,
            "id": 513,
            "remainingUnits": 40,
            "rateSource": "Role"
        },
        {
            "activityID": "A1020",
            "costCode": "00000~~00500",
            "actualUnits": 0,
            "resourceCode": "Child1Rate4",
            "workspaceCode": "NON_PROD3",
            "plannedUnits": 40,
            "atCompletionUnits": 40,
            "id": 510,
            "remainingUnits": 40,
            "rateSource": "Resource"
        }
    ],
    "message": [
        "success"
    ],
    "status": 200,
    "rest_audit_id": 2648
}
```


Sample Request (Creation of Assignments for Baseline Project from Oracle Primavera Cloud):

```
{
   "options":{
      "project_number":"P-0099",
      "source":"Primavera Cloud",
      "sourceProjectId":"Reg235",
      "activitySheetType":"system",
      "projectType":"Baseline",
      "removeUnreferencedData":"true"
   },
  "data": [
     {
     "activityId":"A1000",
      "resourceCode":"Res1",
      "roleCode":"Role1",
      "rateSource": "Resource",
      "plannedPricePerUnit": 10,
      "actualsPricePerUnit":20,
      "plannedUnits":10,
      "actualUnits":10,
      "atCompletionUnits":10,
      "remainingUnits":10,
      "plannedCost": 300.50,
      "actualCost": 200.30,
      "atCompletionCost":500.80,
      "remainingCost":50.00,
      "costCode": "C-001",
      "start": "2023-06-05T08:00:00",
      "finish": "2023-06-09T16:00:00",
      "duration": 40,
      "plannedStart": "2023-06-05T08:00:00",
      "plannedFinish": "2023-06-09T16:00:00",
      "plannedDuration":40,
      "actualStart": "",
      "actualFinish": "",
```

```
      "remainingStart": "2023-06-05T08:00:00",
      "remainingFinish":  "2023-06-09T16:00:00",
      "remainingDuration" : 40,
      "plannedUnitsPerTime" : 0,
      "remainingUnitsPerTime" : 0,
      "profile" : "Linear",
      "workspaceCode":"NON_PROD"
  }
  ]
}
```


Sample Response (Creation of Assignments for Baseline Project from Oracle Primavera Cloud):


```
{
    "data": [
       {
      "activityId":"A1000",
      "resourceCode":"Res1",
      "roleCode":"Role1",
      "rateSource": "Resource",
      "plannedPricePerUnit": 10,
      "actualsPricePerUnit":20,
      "plannedUnits":10,
      "actualUnits":10,
      "atCompletionUnits":10,
      "remainingUnits":10,
      "plannedCost": 300.50,
      "actualCost": 200.30,
      "atCompletionCost":500.80,
      "remainingCost":50.00,
      "costCode": "C-001",
      "start": "2023-06-05T08:00:00",
      "finish": "2023-06-09T16:00:00",
      "duration": 40,
      "plannedStart": "2023-06-05T08:00:00",
```

```
      "plannedFinish": "2023-06-09T16:00:00",
      "plannedDuration":40,
      "actualStart": "",
      "actualFinish": "",
      "remainingStart": "2023-06-05T08:00:00",
      "remainingFinish":  "2023-06-09T16:00:00",
      "remainingDuration": 40,
      "plannedUnitsPerTime": 0,
      "remainingUnitsPerTime": 0,
      "profile": "Linear",
        "workspaceCode":"NON_PROD",
      "id" : 123
      }
    ],
    "message": [
        "success"
    ],
    "status": 200,
    "rest_audit_id": 5822
}
```


Sample Failure Request:


```
{
   "options":{
      "project_number":"P-0016",
      "source":"Others",
      "sourceProjectId":"Reg235",
      "activitySheetType":"manual",
      "removeUnreferencedData":true,
      "activitySheetName":"MOD",
      "projectType": "Current1"
   },
    "data": [
     {
```

```
     "activityId":"A1000",
      "resourceCode":"Res1",
      "roleCode":"Role1",
      "rateSource": "Resource",
      "plannedPricePerUnit": 10,
      "actualsPricePerUnit":20,
      "plannedUnits":10,
      "actualUnits":10,
      "atCompletionUnits":10,
      "remainingUnits":10,
      "plannedCost": 300.50,
      "actualCost": 200.30,
      "atCompletionCost":500.80,
      "remainingCost":50.00,
      "costCode": "C-001",
      "start": "2023-06-05T08:00:00",
      "finish": "2023-06-09T16:00:00",
      "duration": 40,
      "plannedStart": "2023-06-05T08:00:00",
      "plannedFinish": "2023-06-09T16:00:00",
      "plannedDuration":40,
      "actualStart": "",
      "actualFinish": "",
      "actualDuration": 0,
      "remainingStart": "2023-06-05T08:00:00",
      "remainingFinish":  "2023-06-09T16:00:00",
      "remainingDuration" : 40,
      "plannedUnitsPerTime" : 0,
      "remainingUnitsPerTime" : 0,
      "profile" : "Linear"
    }
  ]
}
```

Sample Failure Response:


```
{
    "data": [],
    "message": [
        {
            "message": "Invalid value was found in a field: 'projectType'.
Allowed values: [Current, Baseline]",
            "status": 12145
        }
    ],
    "status": 3000,
    "rest_audit_id": 1794
}
```


Sample Request (Manual Activity Sheet – Current Project – Assignments for Not Started Activity):


```
{
   "options":{
      "project_number":"P-0016",
      "source":"Others",
      "sourceProjectId":"P-0016",
      "activitySheetType":"manual",
      "removeUnreferencedData":false,
      "activitySheetName":"ACTUTC530",
      "projectType": "Current"
   },
    "data": [
     {
     "activityId":"A1000",
      "roleCode":"APIOPC1",
      "rateSource": "Override",
      "workspaceCode" :"NON_PROD",
      "plannedPricePerUnit": 30.0,
      "actualsPricePerUnit":30,
      "plannedStart": "2023-06-05T08:00:00",
```

```
      "plannedFinish": "2023-06-12T16:00:00",
      "plannedDuration":48,
      "plannedUnits":528.0,
      "atCompletionUnits":528.0,
      "remainingUnits":528.0,
      "costCode": "00000~~00700",
      "start": "2023-06-05T08:00:00",
      "finish": "2023-06-12T16:00:00",
      "duration": 48.0,
      "remainingStart": "2023-06-05T08:00:00",
      "remainingFinish":  "2023-06-12T16:00:00",
      "remainingDuration": 48,
      "remainingUnitsPerTime": 11.0,
      "plannedUnitsPerTime": 11.0,
      "profile": "Linear"
    }
  ]
}
```


Sample Response (Manual Activity Sheet – Current Project – Assignments for Not Started Activity):


```
{
    "data": [
        {
            "actualUnits": null,
            "plannedPricePerUnit": 30.0,
            "plannedUnits": 528.0,
            "remainingFinish": "2023-06-12T16:00:00",
            "start": "2023-06-05T08:00:00",
            "atCompletionUnits": 528.0,
            "remainingUnits": 528.0,
            "plannedStart": "2023-06-05T08:00:00",
            "plannedFinish": "2023-06-12T16:00:00",
             "rateSource": "Override",
            "duration": 48.0,
```

```
            "activityId": "A1000",
            "costCode": "00000~~00700",
            "actualsPricePerUnit": 30,
            "roleCode": "APIOPC1",
            "remainingStart": "2023-06-05T08:00:00",
            "remainingDuration": 48.0,
            "plannedDuration": 48.0,
            "finish": "2023-06-12T16:00:00",
            "remainingUnitsPerTime": 11.0,
            "plannedUnitsPerTime": 11.0,
            "id": 567
        }
    ],
    "message": [
        "success"
    ],
    "status": 200,
    "rest_audit_id": 3396
}
```


Sample Request (Manual Activity Sheet – Current Project – Sample of Assignments for Completed Activity):


```
{
   "options":{
      "project_number":"P-0016",
      "source":"Others",
      "sourceProjectId":"P-0016",
      "activitySheetType":"manual",
      "removeUnreferencedData":false,
      "activitySheetName":"ACTUTC530",
      "projectType": "Current"
   },
    "data": [
     {
     "activityId":"A1020",
```

```
      "roleCode":"CivEng",
      "rateSource": "Override",
      "workspaceCode" :"NON_PROD",
      "plannedPricePerUnit": 30.0,
      "actualsPricePerUnit":30,
      "plannedStart": "2023-06-06T08:00:00",
      "plannedFinish": "2023-06-07T16:00:00",
      "plannedDuration":16,
      "plannedUnits":176.0,
      "atCompletionUnits":8.0,
      "remainingUnits":440.0,
      "costCode": "00000~~00700",
      "start": "2023-06-06T08:00:00",
      "finish": "2023-06-07T16:00:00",
      "duration": 16.0,
      "actualStart": "2023-06-06T08:00:00",
      "actualFinish": "2023-06-07T16:00:00",
      "remainingUnitsPerTime": 11.0,
      "plannedUnitsPerTime": 11.0,
      "actualDuration": 10,
      "actualUnits": 8,
      "profile" : "Linear"
    }
  ]
}
```


Sample Response (Manual Activity Sheet – Current Project – Sample of Assignments for Completed Activity):


```
{
    "data": [
        {
            "actualUnits": 8.0,
            "plannedUnitsPerTime": 11.0,
            "plannedPricePerUnit": 30.0,
            "plannedUnits": 176.0,
```

```
            "remainingFinish": "",
            "start": "2023-06-06T08:00:00",
            "atCompletionUnits": 8.0,
            "remainingUnits": 440.0,
            "plannedStart": "2023-06-06T08:00:00",
            "rateSource": "Override",
            "duration": 16.0,
            "activityId": "A1020",
            "actualFinish": "2023-06-07T16:00:00",
            "plannedFinish": "2023-06-07T16:00:00",
            "costCode": "00000~~00700",
            "actualsPricePerUnit": 30,
            "roleCode": "CivEng",
            "remainingStart": "",
            "remainingDuration": 0,
            "plannedDuration": 16.0,
            "finish": "2023-06-07T16:00:00",
            "id": 571,
            "actualStart": "2023-06-06T08:00:00"
        }
    ],
    "message": [
        "success"
    ],
    "status": 200,
    "rest_audit_id": 3517
}
```


Sample Request (Manual Activity Sheet – Current Project – Sample of Assignments for In Progress Activity):


```
{
   "options":{
      "project_number":"P-0016",
      "source":"Others",
      "sourceProjectId":"P-0016",
```

```
    "activitySheetType":"manual",
    "removeUnreferencedData":false,
    "activitySheetName":"ACTUTC530",
    "projectType": "Current"
 },
  "data": [
   {
   "activityId":"A1010",
    "roleCode":"CivEng",
    "rateSource": "Override",
    "workspaceCode" :"NON_PROD",
    "plannedPricePerUnit": 30.0,
    "actualsPricePerUnit":30,
    "plannedStart": "2023-06-08T08:00:00",
    "plannedFinish": "2023-06-15T16:00:00",
    "plannedDuration":48,
    "plannedUnits":48.0,
    "atCompletionUnits":32.0,
    "remainingUnits":32.0,
    "actualUnits":0,
    "costCode": "00000~~00700",
    "actualStart":"2023-06-05T08:00:00",
    "start": "2023-06-05T08:00:00",
    "finish": "2023-06-09T16:00:00",
    "duration": 40.0,
    "remainingStart": "2023-06-08T08:00:00",
    "remainingFinish":  "2023-06-09T16:00:00",
    "remainingDuration" : 16,
    "plannedUnitsPerTime" : 1,
    "remainingUnitsPerTime":2,
    "actualDuration": 0,
    "profile" : "Linear"
  }
]
```

```
}
```

Sample Response (Manual Activity Sheet – Current Project – Sample of Assignments for In Progress Activity):


```
{
    "data": [
        {
            "plannedFinish": "2023-06-15T16:00:00",
            "actualUnits": null,
            "plannedPricePerUnit": 30.0,
            "plannedUnits": 48.0,
            "remainingFinish": "2023-06-09T16:00:00",
            "start": "2023-06-05T08:00:00",
            "atCompletionUnits": 32.0,
            "remainingUnits": 32.0,
            "plannedStart": "2023-06-08T08:00:00",
            "rateSource": "Override",
            "plannedUnitsPerTime" : 1,
            "remainingUnitsPerTime":2,
            "duration": 40.0,
            "actualUnits":0,
            "activityId": "A1010",
            "costCode": "00000~~00700",
            "actualsPricePerUnit": 30,
            "roleCode": "CivEng",
            "remainingStart": "2023-06-08T08:00:00",
            "remainingDuration": 16.0,
            "plannedDuration": 48.0,
            "finish": "2023-06-09T16:00:00",
            "id": 575,
            "actualStart": "2023-06-05T08:00:00"
        }
    ],
    "message": [
        "success"
```

```
    ],
    "status": 200,
    "rest_audit_id": 3555
}
```

Options JSON Map: Supported Validation Messages and Status Codes

The following error messages and status codes display in the response when incorrect values are provided in the request.

Field Name	Use-case Scenario	Status Code	Error Message
source	The source is not given in JSON input payload	12007	The API request is missing the required information: [source]
source	A wrong source value.	12008	Invalid value was found in a field: [source]. Allowed values: [Primavera Cloud, Others]
source	A wrong value type for source such as boolean or numbers.	12008	Invalid value was found in a field: [source]. Allowed values: [Primavera Cloud, Others]
source	An empty source value.	12030	The API request contains empty value for: [source]. Allowed values: [Primavera Cloud, Others]
project_number	An invalid project_number.	602	Project/Shell Number is not correct.
project_number	The project_number is not given	12018	The API request is missing the required information: [project_number].
project_number	If the project status is inactive or on-hold or View Only for a given project_number.	12020	The API request contains an invalid value: [project_number]. Please check the status of this project_number in Unifier.
project_number	The project_number is empty.	12128	The API request contains empty value for: [project_number].

Field Name	Use-case Scenario	Status Code	Error Message
sourceProjectId	If the sourceProjectId is not configured in the source shell.	12021	The API request contains an invalid value: [sourceProjectId]. Please check if this sourceProjectId has been configured in Unifier.
sourceProjectId	Invalid special characters in the sourceProjectId.	12022	The API request contains invalid characters in: [sourceProjectId]. The following characters are not allowed : / \\ : * ? \" < > | ' =
sourceProjectId	A missing sourceProjectId.	12005	The API request is missing the required information: [sourceProjectId]
sourceProjectId	A blank sourceProjectId.	12032	The API request contains empty value for: [sourceProjectId].
sourceProjectId	Invalid length of sourceProjectId.	12014	Invalid value was found in a field: 'sourceProjectId'. Allowed length: [250]
activitySheetType	A missing activitySheetType value.	12010	The API request is missing the required information: [activitySheetType]
activitySheetType	Accepts only "manual" or "system", else throwing validation.	12011	Invalid value was found in a field: [activitySheetType]. Allowed values: [manual, system]
activitySheetType	The source is "Primavera Cloud" in the request, and the activitySheetType is "manual".	12671	Invalid value was found in a field: [activitySheetType]. If source=Primavera Cloud, allowed values: [system]
activitySheetType	The source is "Others" in the request and the activitySheetType is "system".	12671	Invalid value was found in a field: [activitySheetType]. If source=Others, allowed values: [manual]
projectType	The projectType is missing in the payload.	12143	The API request is missing the required information: [projectType].

Field Name	Use-case Scenario	Status Code	Error Message
projectType	The projectType is empty/blank.	12144	The API request contains empty value for: [projectType].
projectType	The wrong data type(integer/boolean) value is passed for projectType.	12142	Invalid value was found in a field: [projectType]. Allowed only alphanumeric value.
projectType	Some invalid value except "Current"/"Baseline" passed in projectType.	12145	Invalid value was found in a field: [projectType]. Allowed values: [Current, Baseline]
activitySheet Name	The activity sheet name is empty for activity sheet type "manual", and displays validation.	12012	The API request is missing the required information: [activitySheetName].
activitySheet Name	The activitySheetName exceeds 250 characters.	12017	Invalid value was found in a field: [activitySheetName]. Allowed length: [250]
activitySheet Name	he activitySheetName does not exist.	12013	The API request contains an invalid value: [activitySheetName]. Please check if this activitySheetName with type=manual has been configured in Unifier.
removeUnref erencedData	A non-boolean value is provided in removeUnreferencedData.	12016	Invalid value was found in a field: [removeUnreferencedData]. Allowed values: [true, false]

Data JSON List: Supported Validation Messages and Status Codes

The following error messages and status codes display in the response when incorrect values are provided in the request.

Field Name	Use-case Scenario	Status Code	Error Message
activityId	The activityId exceeds 120 characters.	12003	nvalid value was found in a field: [activityId]. Allowed length: [120]

Field Name	Use-case Scenario	Status Code	Error Message
activityId	The activityId is missing in payload.	12009	The API request is missing the required information: [activityId]
activityId	A non-string value is provided for activityId..	12033	Invalid value was found in a field: [activityId]. Allowed only string value or use quotations. Activity ID: <activityId>
activityId	The activityId does not exist in the Activity Sheet.	12606	Invalid value was found in a field [activityId]. Allowed Activity ID that already exists in Activity Sheet. Activity ID: <activityId>
rateSource	The rateSource is empty, or Non-String, or null, or invalid value.	12600	Invalid value was found in a field: [rateSource]. Allowed values: [Resource, Role or Override]. Activity ID: <activityId>
rateSource	The rateSource is missing in payload.	12611	The API request is missing the required information: [rateSource]. Activity ID: <activityId>
workspaceCode	The invalid workspaceCode like not string or not alphanumeric or empty or null.	12115	Invalid value was found in a field: [workspaceCode]. Allowed only alphanumeric value.
workspaceCode	The workspaceCode is missing in payload.	12612	The API request is missing the required information: [workspaceCode].
resourceCode	The rateSource is "Resource" and the resourceCode is missing in the payload.	12400	The API request is missing the required information: [resourceCode]. Activity ID: <activityId>
resourceCode	The rateSource is "Resource" and the Resource Code is empty.	12401	The API request contains an empty value for: [resourceCode]. Activity ID: <activityId>

Field Name	Use-case Scenario	Status Code	Error Message
resourceCode	A non-string value is provided for Resource Code.	12402	Invalid value was found in a field: [resourceCode]. Allowed only string value or use quotations. Activity ID: <activityId>
resourceCode	The Resource Code exceeds 120 characters.	12403	Invalid value was found in a field: [resourceCode]. Allowed length: [120]. Activity ID: <activityId> Resource Code: <resourceCode>
resourceCode	A duplicate resourceCode exists under the same activityId in the request.	12613	Only unique value allowed for [resourceCode] under an Activity. Activity ID: <activityId> Resource Code: <resourceCode>
resourceCode	The Resource Code does not exist in the Master Rate Sheet	12607	Invalid value was found in a field [resourceCode]. Allowed only the Resource codes present in Master Rate Sheet. Activity ID: <activityId> Resource Code: <resourceCode>
roleCode	The rateSource is "Role" and the Role Code is missing.	12421	The API request is missing the required information: [roleCode]. Activity ID: <activityId>
roleCode	The rateSource is "Role" and the Role Code is empty.	12422	The API request contains an empty value for: [roleCode]. Activity ID: <activityId>
roleCode	A non-string value is provided for Role Code.	12423	Invalid value was found in a field: [roleCode]. Allowed only string value or use quotations. Activity ID: <activityId>
roleCode	The Role Code exceeds 120 characters.	12424	Invalid value was found in a field: [roleCode]. Allowed length: [120]. Activity ID: <activityId> Role Code: <roleCode>

Field Name	Use-case Scenario	Status Code	Error Message
roleCode	A duplicate Role Code exists under the same activityId in the request.	12614	Only unique value allowed for [roleCode] under an Activity. Activity ID: <activityId> Role Code: <roleCode>
roleCode	The Role Code does not exist in Master Rate Sheet	12608	Invalid value was found in a field [roleCode]. Allowed only the Role codes present in Master Rate Sheet. Activity ID: <activityId> Role Code: <roleCode>
plannedPrice PerUnit	An Invalid plannedPricePerUnit (Not Double) or empty or null.	12601	Invalid value was found in a field: [plannedPricePerUnit]. Allowed only positive decimal value. Activity ID: <activityId>/Resource Code: <resourceCode>/Role Code: <roleCode>
plannedPrice PerUnit	The plannedPricePerUnit exceeds 999999999999999 or less than 0.	12602	Invalid value was found in a field: [plannedPricePerUnit]. Allowed Range [0-999999999999999]. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
actualsPriceP erUnit	An invalid actualsPricePerUnit (Not Double) or empty or null.	12601	Invalid value was found in a field: [actualsPricePerUnit]. Allowed only positive decimal value. Activity ID: <activityId>. Resource Code: <resourceCode>/Role Code: <roleCode>

Field Name	Use-case Scenario	Status Code	Error Message
actualsPricePerUnit	The actualsPricePerUnit exceeds 999999999999999 or less than 0.	12602	Invalid value was found in a field: [actualsPricePerUnit]. Allowed Range [0-999999999999999]. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
plannedUnits	An invalid plannedUnits (Not Double) or empty or null.	12604	Invalid value was found in a field: [plannedUnits]. Allowed only numerical/decimal value. Activity ID: <activityId> Resource Code: <resourceCode>/Role Code: <roleCode>
plannedUnits	The plannedUnits is less than -99999999999999 or exceeds 999999999999999.	12605	Invalid value was found in a field: [plannedUnits]. Allowed Range [-999999999999999 - 999999999999999]. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
plannedUnits	PlannedUnits != PlannedDuration*PlannedUnitPerTime (for Manual Activity Sheet only).	12615	Invalid value was found in a field [plannedUnits]. The value provided should be equal to (plannedDuration * plannedUnitPerTime) of the assignment. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>

Field Name	Use-case Scenario	Status Code	Error Message
actualUnits	Invalid actualUnits (Not Double) or empty or null.	12604	Invalid value was found in a field: [actualUnits]. Allowed only numerical/decimal value. Activity ID: <activityId> Resource Code: <resourceCode>/Role Code: <roleCode>
actualUnits	actualUnits is less than -99999999999999 or exceeds 999999999999999.	12605	Invalid value was found in a field: [actualUnits]. Allowed Range [-999999999999999 - 999999999999999]. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
actualUnits	For In Progress or Completed Activities, the actualsUnits is missing in the request.	12670	The API request is missing the required information: [actualUnits]. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
atCompletion Units	An invalid atCompletionUnits (Not Double) or empty or null.	12604	Invalid value was found in a field: [atCompletionUnits]. Allowed only numerical/decimal value. Activity ID: <activityId> Resource Code: <resourceCode>/Role Code: <roleCode>
atCompletion Units	The atCompletionUnits is less than -99999999999999 or exceeds 999999999999999.	12605	Invalid value was found in a field: [atCompletionUnits]. Allowed Range [-999999999999999 - 999999999999999]. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>

Field Name	Use-case Scenario	Status Code	Error Message
atCompletion Units	For Not Started or In Progress Activities : If AtCompletionsUnits != RemainingUnits + ActualUnits (for Manual Activity Sheet only).	12615	nvalid value was found in a field [atCompletionUnits]. The value provided should be equal to (remainingUnits + actualUnits) of the assignment. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
atCompletion Units	For Completed Activities : If AtCompletionsUnits != ActualUnits (for Manual Activity Sheet only).	12615	Invalid value was found in a field [atCompletionUnits]. The value provided should be equal to (actualUnits) of the assignment. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
remainingUnits	Invalid remainingUnits (Not Double) or null.	12604	Invalid value was found in a field: [remainingUnits]. Allowed only numerical/decimal value. Activity ID: <activityId> Resource Code: <resourceCode>/Role Code: <roleCode>
remainingUnits	The remainingUnits is less than -99999999999999 or exceeds 999999999999999.	12605	Invalid value was found in a field: [remainingUnits]. Allowed Range [-999999999999999 - 999999999999999]. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>

Field Name	Use-case Scenario	Status Code	Error Message
remainingUnits	If RemainingUnits != RemainingDuration*RemainingUnitsPerTime (for Manual Activity Sheet only).	12615	Invalid value was found in a field [remainingUnits]. The value provided should be equal to (remainingDuration * remainingUnitsPerTime) of the assignment. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
costCode	An Invalid costCode is provided - (Non-String) or empty or null or blank.	12609	Invalid value was found in a field: [costCode]. Allowed only string values. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
costCode	The costCode does not exist in the Cost Sheet.	12610	Invalid value was found in a field [costCode]. Allowed only the Cost codes present in Cost Sheet. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
costCode	Inactive costCode provided in the API request.	12623	Invalid value was found in a field: [costCode]. Allowed only active Cost codes. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
plannedStart	An invalid plannedStart format or null or empty value is provided in the request.	12620	The API request contains an invalid value: [plannedStart]. Correct date format [yyyy-MM-ddTHH:mm:ss]. Activity ID: <activityId>/Resource Code: <Resource Code>/Role Code: <roleCode>

Field Name	Use-case Scenario	Status Code	Error Message
plannedStart	The plannedStart less than Activity Planned Start Date.	12621	Invalid value was found in a field [plannedStart]. plannedStart cannot be less than Activity plannedStart. Activity ID: <activityId>/Resource Code: <Resource Code>/Role Code: <roleCode>
plannedStart	The plannedStart provided is on a holiday or a non-working day.	12672	Invalid value was found in a field: [plannedStart]. Please provide a working day according to the calendar. Activity ID: <activityId>/Resource Code: <Resource Code>/Role Code: <roleCode>
plannedFinish	An invalid plannedFinish format or null or empty value provided in the request.	12620	The API request contains an invalid value: [plannedFinish]. Correct date format [yyyy-MM-ddTHH:mm:ss]. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
plannedFinish	The plannedFinish provided is on a holiday or a non-working day.	12672	Invalid value was found in a field: [plannedFinish]. Please provide a working day according to the calendar. Activity ID: <activityId>/Resource Code: <Resource Code>/Role Code: <roleCode>

Field Name	Use-case Scenario	Status Code	Error Message
plannedDuration	An invalid plannedDuration (Not Integer) or empty or null.	12616	Invalid value was found in a field: [plannedDuration]. Allowed only positive integer value. Activity ID: <activityId> Resource Code: <resourceCode>/Role Code: <roleCode>
plannedDuration	The plannedDuration is less than zero or exceeds 20000.	12617	Invalid value was found in a field: [plannedDuration]. Allowed Range [0-20000]. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
plannedDuration	If plannedDuration != plannedFinish - plannedStart.	12618	Invalid value was found in a field [plannedDuration]. The value provided should be equal to (plannedFinish - plannedStart) of the assignment, as per the calendar defined. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
actualStart	An invalid actualStart format or null or empty value is provided in the request.	12620	The API request contains an invalid value: [actualStart]. Correct date format [yyyy-MM-ddTHH:MM:SS]. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
actualStart	If Actual Start is in the future.	12625	Invalid value was found in a field [actualStart]. actualStart cannot be later than Today. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>

Field Name	Use-case Scenario	Status Code	Error Message
actualStart	actualStart provided is on holiday or non-working day.	12672	Invalid value was found in a field: [actualStart]. Please provide a working day according to the calendar. Activity ID: <activityId>/Resource Code: <Resource Code>/Role Code: <roleCode>
actualFinish	Invalid actualFinish format or null or empty value provided in the API Request.	12620	The API request contains an invalid value: [actualFinish]. Correct date format [yyyy-MM-ddTHH:mm:ss]. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
actualFinish	The Actual Finish is in future.	12625	Invalid value was found in a field [actualFinish]. actualFinish cannot be later than Today. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
actualFinish	The plannedStart provided is on a holiday or a non-working day.	12672	Invalid value was found in a field: [plannedStart]. Please provide a working day according to the calendar. Activity ID: <activityId>/Resource Code: <Resource Code>/Role Code: <roleCode>

Field Name	Use-case Scenario	Status Code	Error Message
actualFinish	The actualFinish provided is on a holiday or a non-working day.	12672	Invalid value was found in a field: [actualFinish]. Please provide a working day according to the calendar. Activity ID: <activityId>/Resource Code: <Resource Code>/Role Code: <roleCode>
remainingStart	An invalid remainingStart format or null or empty value provided in the request.	12620	The API request contains an invalid value: [remainingStart]. Correct date format [yyyy-MM-ddTHH:mm:ss]. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
remainingStart	For NotStarted Activity, if plannedStart date and remainingStart are provided in the request, they should be the same, otherwise displays an error.	12624	Invalid value was found in a field [remainingStart]. The value provided should be equal to plannedStart, if Activity status = Not Started. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
remainingStart	For In Progress Activities, if the remaining start date less than Activity Remaining Start date then throw an error.	12626	Invalid value was found in a field [remainingStart]. The value provided should be equal to or greater than remainingStart of the Activity, if Activity status = In Progress. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>

Field Name	Use-case Scenario	Status Code	Error Message
remainingStart	The remainingStart provided is on a holiday or a non-working day.	12672	Invalid value was found in a field: [remainingStart]. Please provide a working day according to the calendar. Activity ID: <activityId>/Resource Code: <Resource Code>/Role Code: <roleCode>
remainingFinish	Invalid remainingFinish format or null or empty value provided in the API Request.	12620	The API request contains an invalid value: [remainingFinish]. Correct date format [yyyy-MM-ddTHH:mm:ss]. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
remainingFinish	For NotStarted Activity, if remainingFinish date and plannedFinish date are provided in the request, then they should be same, else display an error.	12624	Invalid value was found in a field [remainingFinish]. The value provided should be equal to plannedFinish, if Activity status = Not Started. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
remainingFinish	The remainingFinish provided is on a holiday or a non-working day.	12672	Invalid value was found in a field: [remainingFinish]. Please provide a working day according to the calendar. Activity ID: <activityId>/Resource Code: <Resource Code>/Role Code: <roleCode>

Field Name	Use-case Scenario	Status Code	Error Message
remainingDuration	An invalid remainingDuration (Not Integer) or empty or null.	12616	Invalid value was found in a field: [remainingDuration]. Allowed only positive integer value. Activity ID: <activityId> Resource Code: <resourceCode>/Role Code: <roleCode>
remainingDuration	The remainingDuration is less than zero or exceeds 20000.	12617	Invalid value was found in a field: [remainingDuration]. Allowed Range [0-20000]. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
remainingDuration	remainingDuration!= RemainingFinish - RemainingStart.	12618	Invalid value was found in a field [remainingDuration]. The value should be equal to (remainingFinish - remainingStart) of the assignment, as per the calendar defined. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
start	An invalid start format or null or empty value provided in the request.	12620	The API request contains an invalid value: [start]. Correct date format [yyyy-MM-ddTHH:mm:ss]. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>

Field Name	Use-case Scenario	Status Code	Error Message
start	For NotStarted Activity, if Planned start date and Start date are provided in the request, they should be same, else displays an error.	12624	Invalid value was found in a field [start]. The value provided should be equal to plannedStart, if Activity status = Not Started. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
start	For In Progress & Completed Activities, if the actual start date and start are not same, then display an error.	12627	Invalid value was found in a field [start]. The value provided should be equal to actualStart (actualStart (Assignment)= actualStart (Activity), if not provided in API), if Activity status = In Progress or Completed. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
start	The start provided is on aholiday or a non-working day.	12672	Invalid value was found in a field: [start]. Please provide a working day according to the calendar. Activity ID: <activityId>/Resource Code: <Resource Code>/Role Code: <roleCode>
finish	An invalid finish format or null or empty value is provided in the request.	12620	The API request contains an invalid value: [finish]. Correct date format [yyyy-MM-ddTHH:mm:ss]. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>

Field Name	Use-case Scenario	Status Code	Error Message
finish	For NotStarted Activity, if Planned finish date and finish are provided in the Request, they should be same. Otherwise, display an error.	12624	Invalid value was found in a field [finish]. The value provided should be equal to plannedfinish, if Activity status = Not Started. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
finish	For In Progress Activities, if the Remaining finish date and finish are not same, display an error.	12628	Invalid value was found in a field [finish]. The value provided should be equal to remainingfinish, if Activity status = In Progress. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
finish	For Completed Activities, if the actual finish date and finish are not same, display an error.	12629	Invalid value was found in a field [finish]. The value provided should be equal to actualFinish (actualFinish (Assignment)= actualFinish (Activity), if not provided in API), if Activity status = Completed. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
finish	The finish provided is on a holiday or a non-working day.	12672	Invalid value was found in a field: [finish]. Please provide a working day according to the calendar. Activity ID: <activityId>/Resource Code: <Resource Code>/Role Code: <roleCode>

Field Name	Use-case Scenario	Status Code	Error Message
duration	An invalid Duration (Not Integer) or empty or null.	12616	Invalid value was found in a field: [duration]. Allowed only positive integer value. Activity ID: <activityId> Resource Code: <resourceCode>/Role Code: <roleCode>
duration	The duration is less than zero or exceeds 20000	12617	Invalid value was found in a field: [duration]. Allowed Range [0-20000]. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
duration	If Duration != Finish - Start	12618	Invalid value was found in a field [duration]. The value provided should be equal to (finish - start) of the assignment, as per the calendar defined. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
plannedUnits PerTime	An Invalid plannedUnitsPerTime (Not Double).	12604	Invalid value was found in a field: [plannedUnitsPerTime]. Allowed only numerical/decimal value. Activity ID: <activityId> Resource Code: <resourceCode>/Role Code: <roleCode>
plannedUnits PerTime	The plannedUnitsPerTime is less than -99999999999999 or exceeds 999999999999999.	12605	Invalid value was found in a field: [remainingUnitsPerTime]. Allowed Range [-999999999999999 - 999999999999999]. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>

Field Name	Use-case Scenario	Status Code	Error Message
remainingUnitsPerTime	An invalid remainingUnitsPerTime (Not Double).	12604	Invalid value was found in a field: [remainingUnitsPerTime]. Allowed only numerical/decimal value. Activity ID: <activityId>. Resource Code: <resourceCode>/Role Code: <roleCode>
remainingUnitsPerTime	The remainingUnitsPerTime is less than -99999999999999 or exceeds 999999999999999.	12605	Invalid value was found in a field: [remainingUnitsPerTime]. Allowed Range [-999999999999999 - 999999999999999]. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
remainingUnitsPerTime	For NotStarted Activity, if the remainingUnitsPerTime is included in the request, it should be same as plannedUnitsPerTime. Otherwise, displays an error.	12624	Invalid value was found in a field [remainingUnitsPerTime]. The value provided should be equal to plannedUnitsPerTime, if Activity status = Not Started. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>
profile	If the profile in the request is empty, (Non-String), null or an invalid value.	12619	Invalid value was found in a field: [profile]. Allowed values: [Linear]. Activity ID: <activityId> Resource Code: <Resource Code>/Role Code: <roleCode>

Create or Update Assignment Spreads

POST /ws/rest/service/v2/activity/sheets/assignments/spread

Purpose:

Create or update Assignment Spreads in a specific shell from the source system.

Permissions:

The user must have **Create** permissions enabled. Selecting or clearing **Update** permissions has no impact on a user's ability to utilize this REST Service.

Prerequisites:

This REST Service is specific to updating externally synced Assignment Spread data from other applications. Therefore, sourceProjectID should be configured or added in the user interface tab Shell Details → Primavera Cloud Integration.

Sample Spread JSON Format:


```
{
  "project": {
    "baselineId": 182202,
    "baselineName": "B3",
    "isBaseline": true,
    "projectCode": "AOPC",
    "projectId": 310301,
    "projectName": "AOPC"
  },
  "resourceAssignments": [
    {
      "activityCode": "A11",
      "activityId": 246001,
      "activityName": "Act1",
      "actualCost": 0,
      "actualCostProject": 0,
      "actualUnits": 0,
      "assignmentCode": "AA0",
      "assignmentId": 100001,
      "atCompletionCost": 0,
      "atCompletionCostProject": 0,
      "atCompletionUnits": 40,
      "plannedCost": 0,
      "plannedCostProject": 0,
```

```
"plannedUnits": 40,
"rateSource": "RESOURCE",
"remainingCost": 0,
"remainingCostProject": 0,
"remainingUnits": 40,
"resourceCode": "R19",
"resourceId": 56101,
"resourceName": "R1",
"spread": {
  "actualCost": [
    0,
    0,
    0,
    0,
    0,
    0,
    0
  ],
  "actualCostProject": [
    0,
    0,
    0,
    0,
    0,
    0,
    0
  ],
  "actualUnits": [
    0,
    0,
    0,
    0,
    0,
    0,
```

```
    0
  ],
  "atCompletionCost": [
    0,
    0,
    0,
    0,
    0,
    0,
    0
  ],
  "atCompletionCostProject": [
    0,
    0,
    0,
    0,
    0,
    0,
    0
  ],
  "atCompletionUnits": [
    8,
    0,
    0,
    8,
    8,
    8,
    8
  ],
  "plannedCost": [
    0,
    0,
    0,
    0,
```

```
      0,
      0,
      0
    ],
    "plannedCostProject": [
      0,
      0,
      0,
      0,
      0,
      0,
      0
    ],
    "plannedUnits": [
      8,
      0,
      0,
      8,
      8,
      8,
      8
    ],
    "remainingCost": [
      0,
      0,
      0,
      0,
      0,
      0,
      0
    ],
    "remainingCostProject": [
      0,
      0,
```

```
        0,
        0,
        0,
        0,
        0
      ],
      "remainingUnits": [
        8,
        0,
        0,
        8,
        8,
        8,
        8
      ],
      "spreadDates": [
        "2023-06-09T00:00:00",
        "2023-06-10T00:00:00",
        "2023-06-11T00:00:00",
        "2023-06-12T00:00:00",
        "2023-06-13T00:00:00",
        "2023-06-14T00:00:00",
        "2023-06-15T00:00:00"
      ]
    }
  },
  {
    "activityCode": "A22",
    "activityId": 246002,
    "activityName": "Act2",
    "actualCost": 0,
    "actualCostProject": 0,
    "actualUnits": 0,
    "assignmentCode": "AA1",
```

```
"assignmentId": 100002,
"atCompletionCost": 0,
"atCompletionCostProject": 0,
"atCompletionUnits": 40,
"plannedCost": 0,
"plannedCostProject": 0,
"plannedUnits": 40,
"rateSource": "RESOURCE",
"remainingCost": 0,
"remainingCostProject": 0,
"remainingUnits": 40,
"resourceCode": "R20",
"resourceId": 56201,
"resourceName": "R2",
"spread": {
  "actualCost": [
    0,
    0,
    0,
    0,
    0,
    0,
    0
  ],
  "actualCostProject": [
    0,
    0,
    0,
    0,
    0,
    0,
    0
  ],
  "actualUnits": [
```

```
      0,
      0,
      0,
      0,
      0,
      0,
      0
    ],
    "atCompletionCost": [
      0,
      0,
      0,
      0,
      0,
      0,
      0
    ],
    "atCompletionCostProject": [
      0,
      0,
      0,
      0,
      0,
      0,
      0
    ],
    "atCompletionUnits": [
      8,
      0,
      0,
      8,
      8,
      8,
      8
```

```
        ],
        "plannedCost": [
          0,
          0,
          0,
          0,
          0,
          0,
          0
        ],
        "plannedCostProject": [
          0,
          0,
          0,
          0,
          0,
          0,
          0
        ],
        "plannedUnits": [
          8,
          0,
          0,
          8,
          8,
          8,
          8
        ],
        "remainingCost": [
          0,
          0,
          0,
          0,
          0,
```

```
        0,
        0
      ],
      "remainingCostProject": [
        0,
        0,
        0,
        0,
        0,
        0,
        0
      ],
      "remainingUnits": [
        8,
        0,
        0,
        8,
        8,
        8,
        8
      ],
      "spreadDates": [
        "2023-06-09T00:00:00",
        "2023-06-10T00:00:00",
        "2023-06-11T00:00:00",
        "2023-06-12T00:00:00",
        "2023-06-13T00:00:00",
        "2023-06-14T00:00:00",
        "2023-06-15T00:00:00"
      ]
    }
  },
  {
    "activityCode": "A33",
```

```
"activityId": 246003,
"activityName": "Act3",
"actualCost": 0,
"actualCostProject": 0,
"actualUnits": 0,
"assignmentCode": "AA2",
"assignmentId": 100003,
"atCompletionCost": 0,
"atCompletionCostProject": 0,
"atCompletionUnits": 40,
"plannedCost": 0,
"plannedCostProject": 0,
"plannedUnits": 40,
"rateSource": "RESOURCE",
"remainingCost": 0,
"remainingCostProject": 0,
"remainingUnits": 40,
"resourceCode": "R21",
"resourceId": 56202,
"resourceName": "R3",
"spread": {
  "actualCost": [
    0,
    0,
    0,
    0,
    0,
    0,
    0
  ],
  "actualCostProject": [
    0,
    0,
    0,
```

```
      0,
      0,
      0,
      0
    ],
    "actualUnits": [
      0,
      0,
      0,
      0,
      0,
      0,
      0
    ],
    "atCompletionCost": [
      0,
      0,
      0,
      0,
      0,
      0,
      0
    ],
    "atCompletionCostProject": [
      0,
      0,
      0,
      0,
      0,
      0,
      0
    ],
    "atCompletionUnits": [
      8,
```

```
      0,
      0,
      8,
      8,
      8,
      8
    ],
    "plannedCost": [
      0,
      0,
      0,
      0,
      0,
      0,
      0
    ],
    "plannedCostProject": [
      0,
      0,
      0,
      0,
      0,
      0,
      0
    ],
    "plannedUnits": [
      8,
      0,
      0,
      8,
      8,
      8,
      8
    ],
```

```
"remainingCost": [
  0,
  0,
  0,
  0,
  0,
  0,
  0
],
"remainingCostProject": [
  0,
  0,
  0,
  0,
  0,
  0,
  0
],
"remainingUnits": [
  8,
  0,
  0,
  8,
  8,
  8,
  8
],
"spreadDates": [
  "2023-06-09T00:00:00",
  "2023-06-10T00:00:00",
  "2023-06-11T00:00:00",
  "2023-06-12T00:00:00",
  "2023-06-13T00:00:00",
  "2023-06-14T00:00:00",
```

```
          "2023-06-15T00:00:00"
        ]
      }
    }
  ],
  "timescale": "daily"
}
```

Sample Request (Success Scenario):

```
{hosturl}/ws/rest/service/v2/activity/sheets/assignments/spread
```

Inputs in JSON Raw-data:

```
{
    "options": {
        "project_number": "P-0056",
        "sourceProjectId": "P-0056",
        "source": "Primavera Cloud",
        "projectType": "Current"
    },
    "_attachment": {
        "zipped_file_name": "AssignmentSpread.zip",
        "zipped_file_size": 780,
        "zipped_file_content":
"UEsDBBQAAAAIAKuD7VYD1rN9XAIAAI8fAAAVAAAAQXNzaWdubWVudFNwcmVhZC5qc29u7Z
hda9swFIbvB/sPQdcp6CMNSe/SrBeDbSnpejV2odkiaNhysJRBGfnvkxVbcmzP6soam6IQi
O33yOe1zpH1kN/v300mYJ9nP1mkwM3EnOsrP6hkCRfsY6wvogXGEE8b0heaMi2CWwIqicvb
k1gIKj8wI7gE6yw2Q1ab+zVoaCYTQZBA1FB0IjeqkI4mAORMZoc8Yisp+U6kTCipw76ZwdW
D6DAaKf6LqyebHCGdu6ma9Hg2hzp9S7QOItUYe6DJOpPFzMGu6/fmCTrlR8GVbAj2QazXFQ
Rd+qksEJ671cPSfcIUz0Rlqlt11nqCKoOzmr5PqBAsLu/eFtyNu/Wue+ZUsYeikOaJt1nCQ
E1kKeWCi51N2ZZc0r9FtNO67qmmWjfXcgnaupnq6zmCqKXZJbCtd4Xc54zG1VpqtUTZotVH
+32FM3fy3QntxhyBGVOaQW3UWn7w+tS8jKVKNUudtVo8O8Xi+WdNM+dvkaHLVNoYSYVKN4M
Xx75thy6PNTKSAlk/g5fotDV90BtuywbQhEeu4PwKLr9CeGO+YNoZgaA3AnkjsDeCeCNm3o
hrF1GbkurweDo4Tr3IiHEvMuJeZMQXRkbkQUb81pDx7mHzuF3fDYWNi0UnNjq1BxxxAMcXm
gngWBx7V+ooLA2+8QVwDODon5AAjgEc/zM4EtILjqQXHMmFwRF7wJG8NXDcfLoQNGaJBcbP
VNAdA2di9Sejbr/z60UzuEFFNQIvvtBM4MXi2LtAR2Fp8P0u8GLgRf+EBF4MvPhPvKh/ynk
CiqdMRjQx23tMefKkBx7/AFBLAQI/ABQAAAAIAKuD7VYD1rN9XAIAAI8fAAAVACQAAAAAAA
AAIAAAAAAAAAABBc3NpZ25tZW50U3ByZWFkLmpzb24KACAAAAAAAAEAGAB4ZYwTebXZAQAAA
AAAAAAAAAAAAAAAAABQSwUGAAAAAAEAAQBnAAAAjwIAAAA"
    }
}
```

Sample Response (Success Scenario):


```
{
    "data": {
        "jobId": 1689307060653
    },
    "message": [
        "Job for spread data created successfully."
    ],
    "status": 202,
    "rest_audit_id": 14317
}
```


Sample Request (Failed Scenario):

```
{hosturl}ws/rest/service/v2/activity/sheets/assignments/spread
```

Inputs in JSON Raw Data:


```
 {
    "options": {
        "project_number": "P-0056",
        "sourceProjectId": "P-0056",
        "source": "Primavera Cloud",
        "projectType": ""
    },
    "_attachment": {
        "zipped_file_name": "AssignmentSpread.zip",
        "zipped_file_size": 780,
```

```
        "zipped_file_content":
"UEsDBBQAAAAIAKuD7VYD1rN9XAIAAI8fAAAVAAAAQXNzaWdubWVudFNwcmVhZC5qc29u7Z
hda9swFIbvB/sPQdcp6CMNSe/SrBeDbSnpejV2odkiaNhysJRBGfnvkxVbcmzP6soam6IQi
O33yOe1zpH1kN/v300mYJ9nP1mkwM3EnOsrP6hkCRfsY6wvogXGEE8b0heaMi2CWwIqicvb
k1gIKj8wI7gE6yw2Q1ab+zVoaCYTQZBA1FB0IjeqkI4mAORMZoc8Yisp+U6kTCipw76ZwdW
D6DAaKf6LqyebHCGdu6ma9Hg2hzp9S7QOItUYe6DJOpPFzMGu6/fmCTrlR8GVbAj2QazXFQ
Rd+qksEJ671cPSfcIUz0Rlqlt11nqCKoOzmr5PqBAsLu/eFtyNu/Wue+ZUsYeikOaJt1nCQ
E1kKeWCi51N2ZZc0r9FtNO67qmmWjfXcgnaupnq6zmCqKXZJbCtd4Xc54zG1VpqtUTZotVH
+32FM3fy3QntxhyBGVOaQW3UWn7w+tS8jKVKNUudtVo8O8Xi+WdNM+dvkaHLVNoYSYVKN4M
Xx75thy6PNTKSAlk/g5fotDV90BtuywbQhEeu4PwKLr9CeGO+YNoZgaA3AnkjsDeCeCNm3o
hrF1GbkurweDo4Tr3IiHEvMuJeZMQXRkbkQUb81pDx7mHzuF3fDYWNi0UnNjq1BxxxAMcXm
gngWBx7V+ooLA2+8QVwDODon5AAjgEc/zM4EtILjqQXHMmFwRF7wJG8NXDcfLoQNGaJBcbP
VNAdA2di9Sejbr/z60UzuEFFNQIvvtBM4MXi2LtAR2Fp8P0u8GLgRf+EBF4MvPhPvKh/ynk
CiqdMRjQx23tMefKkBx7/AFBLAQI/ABQAAAAIAKuD7VYD1rN9XAIAAI8fAAAVACQAAAAAAA
AAIAAAAAAAAABBc3NpZ25tZW50U3ByZWFkLmpzb24KACAAAAAAAAEAGAB4ZYwTebXZAQAAA
AAAAAAAAAAAAAAAAABQSwUGAAAAAAEAAQBnAAAAjwIAAAA"
```

```
    }
}
```

Sample Response (Failed Scenario):

```
{
    "data": [],
    "message": [
        {
            "message": "The API request contains empty value for:
[projectType].",
            "status": 12144
        }
    ],
    "status": 3000,
    "rest_audit_id": 14316
}
```

Response Format:

JSON Map {

```
                            "status" : <integer value> ,
                            "data" : [ ] ,
                             "messages": [ <list of string>] ,
                            "rest_audit_id": <id from the rest audit
table matching this request>
                        }
```

Get Spread Job Status

Get /ws/rest/service/v2/activity/sheets/spread/jobStatus/{jobId}

Purpose:

Retrieve the job status of Activity and Assignment Spreads.

Permissions:

To retrieve the job status of a job created via the POST method, a user must have Get Access permissions enabled within Integration Users.

Sample Request:

```
URL :
{hosturl}/ws/rest/service/v2/activity/sheets/spread/jobStatus/1688113665288
```

Sample Response:

```
{
    "message": [
        {
            "jobId": 1690569686180,
            "jobStatus": "COMPLETED",
            "jobDetail": "Job is completed successfully."
        }
    ],
    "status": 200,
    "rest_audit_id": 16306
}
```

Create or Update Activity Spreads

POST /ws/rest/service/v2/activity/sheets/activities/spread

Purpose:

Create or update Activity Spreads in a specific shell from the source system.

Permissions:

The user must have **Create** permissions enabled. Selecting or clearing **Update** permissions has no impact on a user's ability to utilize this REST Service.

Prerequisites:

1) The Project Shell should already be created.
2) The System Activity Sheet should already be available in the Project Shell.

3) The SourceProjectID should be configured in the System Activity Sheet.
4) The user should have token for accessing the API.

This REST Service is specific to updating externally synced Assignment Spread data from other applications. Therefore, sourceProjectID should be configured or added in the user interface tab Shell Details → Primavera Cloud Integration.

> **Note:** Validations are not implemented for System Activity Sheet data in any API assuming the data from the source system is sent properly.

CurrentActivitySpread JSON Sample:


```
{
  "activities": [
    {
      "activityCode": "A1000",
      "activityId": 502202,
      "activityName": "act1",
      "actualTotalCost": 0,
      "actualTotalCostProject": 0,
      "atCompletionTotalCost": 0,
      "atCompletionTotalCostProject": 0,
      "earnedValueCost": 0,
      "earnedValueCostProject": 0,
      "estimateAtCompletionCost": 0,
      "estimateAtCompletionCostProject": 0,
      "estimateToCompleteCost": 0,
      "estimateToCompleteCostProject": 0,
      "estimateToCompleteLaborUnits": 40,
      "plannedTotalCost": 0,
      "plannedTotalCostProject": 0,
      "plannedValueCost": 0,
      "plannedValueCostProject": 0,
      "remainingTotalCost": 0,
      "remainingTotalCostProject": 0,
      "spread": {
        "actualTotalCost": [
          0,
```

```
      0,
      0,
      0,
      0,
      0,
      0
    ],
    "actualTotalCostProject": [
      0,
      0,
      0,
      0,
      0,
      0,
      0
    ],
    "atCompletionTotalCost": [
      0,
      0,
      0,
      0,
      0,
      0,
      0
    ],
    "atCompletionTotalCostProject": [
      0,
      0,
      0,
      0,
      0,
      0,
      0
    ],
```

```
"earnedValueCost": [
  0,
  0,
  0,
  0,
  0,
  0,
  0
],
"earnedValueCostProject": [
  0,
  0,
  0,
  0,
  0,
  0,
  0
],
"estimateAtCompletionCost": [
  0,
  0,
  0,
  0,
  0,
  0,
  0
],
"estimateAtCompletionCostProject": [
  0,
  0,
  0,
  0,
  0,
  0,
```

```
    0
  ],
  "estimateToCompleteCost": [
    0,
    0,
    0,
    0,
    0,
    0,
    0
  ],
  "estimateToCompleteCostProject": [
    0,
    0,
    0,
    0,
    0,
    0,
    0
  ],
  "estimateToCompleteLaborUnits": [
    8,
    8,
    8,
    8,
    0,
    0,
    8
  ],
  "plannedTotalCost": [
    0,
    0,
    0,
    0,
```

```
      0,
      0,
      0
    ],
    "plannedTotalCostProject": [
      0,
      0,
      0,
      0,
      0,
      0,
      0
    ],
    "plannedValueCost": [
      0,
      0,
      0,
      0,
      0,
      0,
      0
    ],
    "plannedValueCostProject": [
      0,
      0,
      0,
      0,
      0,
      0,
      0
    ],
    "remainingTotalCost": [
      0,
      0,
```

```
          0,
          0,
          0,
          0,
          0
        ],
        "remainingTotalCostProject": [
          0,
          0,
          0,
          0,
          0,
          0,
          0
        ],
        "spreadDates": [
          "2023-05-02T00:00:00",
          "2023-05-03T00:00:00",
          "2023-05-04T00:00:00",
          "2023-05-05T00:00:00",
          "2023-05-06T00:00:00",
          "2023-05-07T00:00:00",
          "2023-05-08T00:00:00"
        ]
      },
      "wbsId": 298601
    }
  ],
  "project": {
    "projectCode": "testSpread",
    "projectId": 258401,
    "projectName": "testSpread"
  },
  "timescale": "DAILY"
```

```
}
```

Sample Request (Success Scenario):

```
{hosturl}ws/rest/service/v2/activity/sheets/activities/spread
```

Inputs in Raw JSON-data:

```
{
    "options": {
        "project_number": "P-0056",
        "sourceProjectId": "P-0056",
        "source": "Primavera Cloud",
        "projectType": "Current"
    },
    "_attachment": {
        "zipped_file_name": "557118_activitySpreads.zip",
        "zipped_file_size": 812,
        "zipped_file_content":
"UEsDBBQAAAAIABxu3FYgih2MigIAADgqAAAOAAAAb3Bjc3ByZWFkLmpzb27tV8tq4zAU3Q
fyD8ZrF+RHEqe7kG4KZRiYzMBQZqEmYvDg2MFW

p5SSf6/iR/1QIl0lLVZAIZAc32Pp+Fi+1nkbjyzLxmsa/Y9oRHL71npkh9jnrfxpqq/LdEN
Y3V64ru1w1fsNq7lBEKBgxle/4W15bu/UZxyvUorjZZpTVkcni9+z9B9Z9zl0mW53

MaFRmtRMCOXoYARnCdn8wvEzYZzTxdMD5DTaYkoWrSkZGcgSDrlKK/JhdhAHONwDfkqzn0l
ED3c+aFF3MU7YFfOu8tVmNp7UNo2vSi3NyBZHSZT8rWeS1o8Ok+8ygtn6bBY1v8Cqlf/x

CZ0vQA34UxREa72viF3QF6C+IsFjwwmaO6eRi7rQ7UJPCH0VVRq4xbeOx871TBwRnHbhTAj
DLpzDFOng0ZG+p4tZ0pY8uGud5q6hIi2tal5un9Xce0pAzb3/riy1DLneK0U6ddDWbmDwFX
7

Qolnz7O5zhmublgWUp4Fn5abvjnUE7vG3PeT5N2hyg7wVQrfF13aOM3wpI5AyJlLGVMqYSR
lhw2hZUv/dN9vhl6e8SGvePJwilx0uytLY53ni2BcKYp9nYh81se8KYp9C34Gj8eiC2Affn
Sig

8QgesAa16DoTn8IEcASTooM5wKinMBMcKWrSyC6T8c4QdhUZT+XK4QioRYPbZtLdhelOYQ4
4AqvRwCIT5kBhzgOHOd8Xh7m5IMz5JsxRE+ZMmDsjzCnMA0fjETw7aSdIA6NMmANsuU2YU5
JmwtwZ

wkyYs0yYu0SLBvaYMCcVZcIcKMz5VZhjP5V/9q68efUuuDlS5zpmKf1R7pSdLqMcdxIGyO1
VWK7rn3sg7MspWY8m+RrHBeVucf/wm1X371BLAQI/ABQAAAAIABxu3FYgih2MigIAADgqAA
AOACQAA

AAAAAAAIAAAAAAAAABvcGNzcHJlYWQuanNvbgoAIAAAAAAAAQAYAJmTLy6ZqdkBAAAAAAAA
AAAAAAAAAAAAAFBLBQYAAAAAAQABAGAAAAC2AgAAAA="
    }
}
```

Sample Response (Success Scenario):

```
{
    "data": {
        "jobId": 1688383768969
    },
    "message": [
        "Job for spread data created successfully."
    ],
    "status": 202,
    "rest_audit_id": 12676
}
```


Sample Request (Failed Scenario):

```
{hosturl}/ws/rest/service/v2/activity/sheets/activities/spread
```

Inputs in Raw JSON-data:


```
 {
    "options": {
        "project_number": "P-0056",
        "sourceProjectId": "P-0056",
        "source": "Primavera Cloud",
        "projectType": ""
    },
    "_attachment": {
        "zipped_file_name": "557118_activitySpreads.zip",
        "zipped_file_size": 812,
```

```
        "zipped_file_content":
"UEsDBBQAAAAIABxu3FYgih2MigIAADgqAAAOAAAAb3Bjc3ByZWFkLmpzb27tV8tq4zAU3Q
fyD8ZrF+RHEqe7kG4KZRiYzMBQZqEmYvDg2MFWp5SSf6/iR/1QIl0lLVZAIZAc32Pp+Fi+1
nkbjyzLxmsa/Y9oRHL71npkh9jnrfxpqq/LdENY3V64ru1w1fsNq7lBEKBgxle/4W15bu/U
ZxyvUorjZZpTVkcni9+z9B9Z9zl0mW53MaFRmtRMCOXoYARnCdn8wvEzYZzTxdMD5DTaYko
WrSkZGcgSDrlKK/JhdhAHONwDfkqzn0lED3c+aFF3MU7YFfOu8tVmNp7UNo2vSi3NyBZHSZ
T8rWeS1o8Ok+8ygtn6bBY1v8Cqlf/xCZ0vQA34UxREa72viF3QF6C+IsFjwwmaO6eRi7rQ7
UJPCH0VVRq4xbeOx871TBwRnHbhTAjDLpzDFOng0ZG+p4tZ0pY8uGud5q6hIi2tal5un9Xc
e0pAzb3/riy1DLneK0U6ddDWbmDwFX7Qolnz7O5zhmublgWUp4Fn5abvjnUE7vG3PeT5N2h
yg7wVQrfF13aOM3wpI5AyJlLGVMqYSRlhw2hZUv/dN9vhl6e8SGvePJwilx0uytLY53ni2B
cKYp9nYh81se8KYp9C34Gj8eiC2AffnSig8QgesAa16DoTn8IEcASTooM5wKinMBMcKWrSy
C6T8c4QdhUZT+XK4QioRYPbZtLdhelOYQ44AqvRwCIT5kBhzgOHOd8Xh7m5IMz5JsxRE+ZM
mDsjzCnMA0fjETw7aSdIA6NMmANsuU2YU5JmwtwZwkyYs0yYu0SLBvaYMCcVZcIcKMz5VZh
jP5V/9q68efUuuDlS5zpmKf1R7pSdLqMcdxIGyO1VWK7rn3sg7MspWY8m+RrHBeVucf/wm1
X371BLAQI/ABQAAAAIABxu3FYgih2MigIAADgqAAAOACQAAAAAAAAAIAAAAAAAAABvcGNzc
HJlYWQuanNvbgoAIAAAAAAAAQAYAJmTLy6ZqdkBAAAAAAAAAAAAAAAAAAAAAAAFBLBQYAAAAA
AQABAGAAAAC2AgAAAAA="
```


```
    }
}
```

Sample Response (Failed Scenario):

```
{
    "data": [],
    "message": [
        {
            "message": "The API request contains empty value for:
[projectType].",
            "status": 12144
        }
    ],
    "status": 3000,
    "rest_audit_id": 14302
}
```

Response Format:

JSON Map {

```
                            "status" : <integer value> ,
                            "data" : [ ] ,
                             "messages": [ <list of string>] ,
                            "rest_audit_id": <id from the rest audit
table matching this request>
```

```
}
```

Create, Update, and Remove Activities from the System Activity Sheet of a Specific Shell

Post /ws/rest/service/v2/activity/sheet/activities

Purpose:

Create, update, and delete activities in the Activity Sheet of a shell for a project number specified in the input parameters.

The Activity API creates, updates, or removes activity data as follows:

- Create: If the API request has activities for which the Activity ID is not present in the system, then the Activity data will be created or added by the API request.
- Update: If the API request has activities for which the Activity ID is already present in the system, then the Activity data will be updated by the API request.
- Remove: In the API request options if the remove unreferenced data value passes as as true, then all the activities not present in the API request but already present in Unifier will be removed.

Prerequisites

For creating activities in the System Activity Sheet, the source Project ID should be already configured using the Gateway Integration Tab/Primavera Cloud Integration Tab in the Shell Details.

For creating activities in the Manual Activity Sheet, the activity sheet should be created manually under the Activity Sheet sub-node.

For linking or associating activities to the WBS Codes given in the request parameters, it is expected that the WBS codes are already created in the WBS Sheet either using WBS REST API manually, or integration.

Notes:

- Validations are not implemented for the System Activity Sheet data in any of the API's assuming the data from the source system is sent properly.
- If the System Activity Sheet does not exist in the shell, when a user uses this API, the system activity sheet will be created based on the options provided in the request.
- If the WBS Sheet does not exist in the shell, then the activities will not be assigned to the respective WBS Codes.

Request: Format

The request parameters are included in a JSON Map {} - structure `{"options":{}, "data":[] }`

For the "options" JSON Map, the following fields and validations are applicable:

Mandatory Fields For "options" JSON Map

Field Name	Data Type	Description
source	String	The external application or data from which Activities are pulled. For example, "Primavera" Cloud. "Primavera Cloud" is the only value supported for this release.
project_number	String	A valid 'Active' Unifier shell number (a shell number into which project details are updated). For example, "P-0001".
sourceProjectId	String	A Primavera Cloud Project Code. For example, "Msk-P1".
activitySheetType	String	Accepts only two value "systems." This value indicates if the activity sheet type is system. For Primavera Cloud integrations, it should be "system" as data needs to be inserted into the System Activity Sheet.
projectType	String	The type of project in Unifier for which the Activities have to be created. Allowed values are Current or Baseline.

Field Name	Data Type	Description
activitySheetName	String	If "activitySheetType" is "system" then the activity sheet created will have a name such as "System Activity Sheet" and the value entered in this field will be ignored. If "activitySheetType" is "manual" then this field is mandatory and a new manual activity sheet is created in the shell with this name, or if there is already any existing manual activity sheet with same name, then all the activities in that manual activity sheet will be removed and these activities are re-inserted into the activity sheet.

Optional Fields For "options" JSON Map

Field Name	Data Type	Description
removeUnreferencedData	Boolean	Accepts only true or false. If this value is true, activities will be created & updated in the request body. Activities that do not exist in the current request data will be removed from the existing activity sheet. If this value is false, any activities from the existing activity sheet will not be removed. Activities will be created from the request data if they do not exist and updated if they do exist. If the attribute does not pass in the request, the default value is considered as false and the activity data that does not exist in the current API request data will not be removed.

Validation Use-Cases and Error Codes For "options" JSON Map

Use-Case	Status	Message
source not given	12007	The API request is missing the required information: [source]
source value is not having value 'Primavera Cloud'	12008	Invalid value was found in a field: 'source'. Allowed values: [Primavera Cloud]
source is having empty value	12035	The API request contains empty value for: [source]. Allowed values: [Primavera Cloud].
projectType is empty/blank.	12144	The API request contains empty value for: [projectType].
projectType is missing in payload.	12143	The API request is missing the required information: [projectType].

Use-Case	Status	Message
Some invalid value except "Current"/"Baseline" passed in projectType	12145	Invalid value was found in a field: [projectType]. Allowed values: [Current, Baseline]
Wrong data type(integer/boolean) value passed for projectType	12142	Invalid value was found in a field: [projectType]. Allowed only alphanumeric value.
If projectType is "Baseline" and not configured.	12036	Invalid value was found in a field: [projectType]. Baseline not defined for this Project.
project_number not given.	12018	The API request is missing the required information: [project_number].
Invalid project_number	602	Project/Shell Number is not correct.
Inactive project_number	1219	Project status is Inactive.
project_number is empty/blank	12128	The API request contains empty value for: [project_number].
If this sourceProjectId is not configured in the source unifier shell	12021	The API request contains an invalid value: [sourceProjectId]. Please check if this sourceProjectId has been configured in Unifier.
Invalid Special characters sourceProjectId	12022	The API request contains invalid characters in: [sourceProjectId]. The following characters are not allowed: / \ : * ? " < > | ' ="
Blank sourceProjectId	12005	The API request is missing the required information: [sourceProjectId]
Length of sourceProjectId	12014	Invalid value was found in a field: 'sourceProjectId'. Allowed length: [250]
Blank activitySheetType value	12010	The API request is missing the required information: [activitySheetType]

Use-Case	Status	Message
Accepting only "system", else throwing validation.	12011	Invalid value was found in a field: 'activitySheetType'. Allowed values: [system]

Validation Use-Cases and Error Codes

Use-Case	Status	Message
If activity sheet name is empty for activity sheet type "manual", throwing validation	12012	The API request is missing the required information: [activitySheetName]. If the activitySheetType=manual, then activitySheetName cannot be empty.
Activity Sheet Name exceeded 250 characters.	12017	Invalid value was found in a field: [activitySheetName]. Allowed length: [250]
Activity Sheet Name doesn't exist.	12013	The API request contains an invalid value: [activitySheetName]. Please check if this activitySheetName with type=manual has been configured in Unifier.
Non boolean value provided in removeUnreferencedData	12031	Invalid value was found in a field: [removeUnreferencedData]. Allowed only boolean value.

Mandatory Fields For JSON Map "data"

The "`data`" - JSON List [], can contain one or more JSON Maps
`{"activityId":"<value>", "activityName":"<value>"}`

The mandatory fields and respective validations are listed below.

Field Name	Data Type	Description
uuu_P6ActivityId	String	The ID or Activity code. This is expected to be unique for each activity in the activity sheet. For example, "A1000."
uuu_P6ActivityName	String	The name of the activity. For example, "Activity1."

Validation Use-Cases and Error Codes For JSON Map "data"

The validations for JSON Map "data"are listed below.

Use-Case	Status	Message
Activity Id exceeds 120 characters.	12003	Invalid value was found in a field: [uuu_P6ActivityId]. Allowed length: [120]. Activity Id: <Activity Id>
Duplicate Activity ID exists in Sheet.	12001	Invalid value was found in a field: [uuu_P6ActivityId]. This uuu_P6ActivityId already exists. Activity Id: <Activity Id>
If not provided in API	12009	The API request is missing the required information: [uuu_P6ActivityId]. Activity Id: <Activity Id>
Activity Id cannot be blank.	12030	The API request contains an empty value for:[uuu_P6ActivityId].
Activity Name exceeds 250 characters.	12002	Invalid value was found in a field: [uuu_P6ActivityName]. Allowed length: [250]. Activity Id: <Activity Id>
Activity Name Missing in payload.	12004	The API request is missing the required information: [uuu_P6ActivityName].
Activity Name cannot be blank.	12030	The API request contains an empty value for:[uuu_P6ActivityName].

Validations

Scenario	Status	Message
If any of the mandatory elements, referencing the uDesigner -> Activity Sheet Detail form, are missing.	12027	The API request is missing the required information: [ ].
If any of the mandatory elements, referencing the uDesigner -> Activity Sheet Detail form, are missing.	12029	The API request contains an empty value for: [ ].

Response Format

```
JSON Map  {
                              "status" : <integer value> ,
                              "data" : [ ] ,
                               "messages": [ <list of string>] ,
                              "rest_audit_id": <id from the rest audit
table matching this request>
                         }
```

Sample Request - POST Activity API

```
{
   "options":{
      "project_number":"P-0115",
      "source":"Primavera Cloud",
      "sourceProjectId":"ActivityManual",
      "activitySheetType": "system",
      "removeUnreferencedData": false,
     "projectType": "Current"
   },
  "data":[  {
         "uuu_P6ActivityId":"A1010",
          "uuu_P6ActivityName":"sas",
         "uuu_P6EACCost":"0.0",
         "uuu_P6ScheduleVariance":"0.0",
         "uuu_P6ActualTotalUnits":"0.0",
         "uuu_P6ActualStart":"",
         "uuu_P6AtCompletionTotalUnits":"1827.0",
         "uuu_P6ActualDuration":"0.0",
         "uuu_P6ActualFinish":"",
         "uuu_P6WBSName":"New WBS-1",
         "uuu_P6WBSCode" :"wbs-1",
         "uuu_P6WBSPath":"Msk-P1.1.11",
         "uuu_P6CostVariance":"0.0",
         "uuu_P6BAC":"1461600.0",
         "uuu_P6RemainingEarlyFinish":"2037-08-05T16:00:00",
```

```
        "uuu_P6PlannedFinish":"2037-08-05T16:00:00",
        "uuu_P6EVCost":"0.0",
        "uuu_P6PlannedTotalCost":"1461600.0",
        "uuu_P6ActivityType":"Task Dependent",
        "uuu_P6ETC":"1461600.0",
        "uuu_P6RemainingTotalUnits":"1827.0",
        "uuu_P6RemainingEarlyStart":"2030-08-06T08:00:00",
        "uuu_P6AtCompletionDuration":"1827.0",
        "uuu_P6PercentComplete":"0.0",
        "uuu_P6CPIndex":"0.0",
        "uuu_P6VAC":"0.0",
        "uuu_P6PerfPercComplete":"0.0",
        "uuu_P6RemainingTotalCost":"1461600.0",
        "uuu_P6PlannedDuration":"1827.0",
        "uuu_P6ActivityStatus":"Not Started",
        "uuu_P6AtCompletionTotalCost":"1461600.0",
        "uuu_P6PVCost":"0.0",
        "uuu_P6SPIndex":"0.0",
        "uuu_P6ActualTotalCost":"0.0",
        "uuu_P6PlannedStart":"2030-08-06T08:00:00",
        "uuu_P6PlannedTotalUnits":"1827.0",
        "uuu_P6Start":"2030-08-06T08:00:00",
        "uuu_P6RemainingDuration":"1827.0",
        "uuu_P6Finish":"2037-08-05T16:00:00"
    },
    {
        "uuu_P6ActivityId":"A1",
         "uuu_P6ActivityName":"Asde",
        "uuu_P6EACCost":"0.0",
        "uuu_P6ScheduleVariance":"0.0",
        "uuu_P6ActualTotalUnits":"0.0",
        "uuu_P6ActualStart":"",
        "uuu_P6AtCompletionTotalUnits":"1827.0",
        "uuu_P6ActualDuration":"0.0",
```

```
        "uuu_P6ActualFinish":"",
        "uuu_P6WBSName":"New WBS-1",
        "uuu_P6WBSCode" :"wbs-1",
        "uuu_P6WBSPath":"Msk-P1.1.11",
        "uuu_P6CostVariance":"0.0",
        "uuu_P6BAC":"1461600.0",
        "uuu_P6RemainingEarlyFinish":"2037-08-05T16:00:00",
        "uuu_P6PlannedFinish":"2037-08-05T16:00:00",
        "uuu_P6EVCost":"0.0",
        "uuu_P6PlannedTotalCost":"1461600.0",
        "uuu_P6ActivityType":"Task Dependent",
        "uuu_P6ETC":"1461600.0",
        "uuu_P6RemainingTotalUnits":"1827.0",
        "uuu_P6RemainingEarlyStart":"2030-08-06T08:00:00",
        "uuu_P6AtCompletionDuration":"1827.0",
        "uuu_P6PercentComplete":"0.0",
        "uuu_P6CPIndex":"0.0",
        "uuu_P6VAC":"0.0",
        "uuu_P6PerfPercComplete":"0.0",
        "uuu_P6RemainingTotalCost":"1461600.0",
        "uuu_P6PlannedDuration":"1827.0",
        "uuu_P6ActivityStatus":"Not Started",
        "uuu_P6AtCompletionTotalCost":"1461600.0",
        "uuu_P6PVCost":"0.0",
        "uuu_P6SPIndex":"0.0",
        "uuu_P6ActualTotalCost":"0.0",
        "uuu_P6PlannedStart":"2030-08-06T08:00:00",
        "uuu_P6PlannedTotalUnits":"1827.0",
        "uuu_P6Start":"2030-08-06T08:00:00",
        "uuu_P6RemainingDuration":"1827.0",
        "uuu_P6Finish":"2037-08-05T16:00:00",
}
```

```
   ]
}
```


Sample Output With Success Response


```
{
    "data": [
        {
            "uuu_P6EACCost": "0.0",
            "uuu_P6ScheduleVariance": "0.0",
            "uuu_P6ActualTotalUnits": "0.0",
            "uuu_P6ActualStart": "",
            "uuu_P6AtCompletionTotalUnits": "1827.0",
            "uuu_P6ActualDuration": "0.0",
            "uuu_P6Finish": "2037-08-05T16:00:00",
            "uuu_P6WBSName": "New WBS-1",
            "uuu_P6WBSPath": "Msk-P1.1.11",
            "uuu_P6CostVariance": "0.0",
            "uuu_P6BAC": "1461600.0",
            "uuu_P6RemainingEarlyFinish": "2037-08-05T16:00:00",
            "uuu_P6PlannedFinish": "2037-08-05T16:00:00",
            "uuu_P6EVCost": "0.0",
            "id": 1482870,
            "uuu_P6ActivityName": "sas",
            "uuu_P6PlannedTotalCost": "1461600.0",
            "uuu_P6ActivityType": "Task Dependent",
            "uuu_P6ActualFinish": "",
            "uuu_P6ETC": "1461600.0",
            "uuu_P6RemainingTotalUnits": "1827.0",
            "uuu_P6RemainingEarlyStart": "2030-08-06T08:00:00",
            "uuu_P6ActivityId": "A1010",
            "uuu_P6AtCompletionDuration": "1827.0",
            "uuu_P6PercentComplete": "0.0",
            "uuu_P6CPIndex": "0.0",
```

```
        "uuu_P6WBSCode": "wbs-1",
        "uuu_P6VAC": "0.0",
        "uuu_P6PerfPercComplete": "0.0",
        "uuu_P6RemainingTotalCost": "1461600.0",
        "uuu_P6PlannedDuration": "1827.0",
        "uuu_P6ActivityStatus": "Not Started",
        "uuu_P6AtCompletionTotalCost": "1461600.0",
        "uuu_P6PVCost": "0.0",
        "uuu_P6SPIndex": "0.0",
        "uuu_P6ActualTotalCost": "0.0",
        "uuu_P6PlannedStart": "2030-08-06T08:00:00",
        "uuu_P6PlannedTotalUnits": "1827.0",
        "uuu_P6Start": "2030-08-06T08:00:00",
        "uuu_P6RemainingDuration": "1827.0"
    },
    {
        "uuu_P6EACCost": "0.0",
        "uuu_P6ScheduleVariance": "0.0",
        "uuu_P6ActualTotalUnits": "0.0",
        "uuu_P6ActualStart": "",
        "uuu_P6AtCompletionTotalUnits": "1827.0",
        "uuu_P6ActualDuration": "0.0",
        "uuu_P6Finish": "2037-08-05T16:00:00",
        "uuu_P6WBSName": "New WBS-1",
        "uuu_P6WBSPath": "Msk-P1.1.11",
        "uuu_P6CostVariance": "0.0",
        "uuu_P6BAC": "1461600.0",
        "uuu_P6RemainingEarlyFinish": "2037-08-05T16:00:00",
        "uuu_P6PlannedFinish": "2037-08-05T16:00:00",
        "uuu_P6EVCost": "0.0",
        "id": 1482871,
        "uuu_P6ActivityName": "Asde",
        "uuu_P6PlannedTotalCost": "1461600.0",
        "uuu_P6ActivityType": "Task Dependent",
```

```
            "uuu_P6ActualFinish": "",
            "uuu_P6ETC": "1461600.0",
            "uuu_P6RemainingTotalUnits": "1827.0",
            "uuu_P6RemainingEarlyStart": "2030-08-06T08:00:00",
            "uuu_P6ActivityId": "A1",
            "uuu_P6AtCompletionDuration": "1827.0",
            "uuu_P6PercentComplete": "0.0",
            "uuu_P6CPIndex": "0.0",
            "uuu_P6WBSCode": "wbs-1",
            "uuu_P6VAC": "0.0",
            "uuu_P6PerfPercComplete": "0.0",
            "uuu_P6RemainingTotalCost": "1461600.0",
            "uuu_P6PlannedDuration": "1827.0",
            "uuu_P6ActivityStatus": "Not Started",
            "uuu_P6AtCompletionTotalCost": "1461600.0",
            "uuu_P6PVCost": "0.0",
            "uuu_P6SPIndex": "0.0",
            "uuu_P6ActualTotalCost": "0.0",
            "uuu_P6PlannedStart": "2030-08-06T08:00:00",
            "uuu_P6PlannedTotalUnits": "1827.0",
            "uuu_P6Start": "2030-08-06T08:00:00",
            "uuu_P6RemainingDuration": "1827.0"
        }
    ],
    "message": [
        "success"
    ],
    "status": 200,
    "rest_audit_id": 20569
}
```


Sample Error Response when the Source Project ID is not given in the Request

An example of an invalid API request and response is provided below.

Sample Invalid Request 1


```
{
   "options":{
      "project_number":"P-0103",
      "source":"Primavera Cloud",
      "sourceProjectId":"ActSpread",
      "activitySheetType": "system",
      "removeUnreferencedData": false,
      "activitySheetName1":"System Activity Sheet"

   },
  "data":[  {
        "uuu_P6ActivityId":"",
         "uuu_P6ActivityName":"Act1",
        "uuu_P6EACCost":"0.0",
        "uuu_P6ScheduleVariance":"0.0",
        "uuu_P6ActualTotalUnits":"0.0",
        "uuu_P6ActualStart":"",
        "uuu_P6AtCompletionTotalUnits":"1827.0",
        "uuu_P6ActualDuration":"0.0",
        "uuu_P6ActualFinish":"",
        "uuu_P6WBSName":"New WBS-1",
        "uuu_P6WBSCode" :"wbs-1",
        "uuu_P6WBSPath":"Msk-P1.1.11",
        "uuu_P6CostVariance":"0.0",
        "uuu_P6BAC":"1461600.0",
        "uuu_P6RemainingEarlyFinish":"2037-08-05T16:00:00",
        "uuu_P6PlannedFinish":"2037-08-05T16:00:00",
        "uuu_P6EVCost":"0.0",
        "uuu_P6PlannedTotalCost":"1461600.0",
        "uuu_P6ActivityType":"Task Dependent",
        "uuu_P6ETC":"1461600.0",
```

```
        "uuu_P6RemainingTotalUnits":"1827.0",
        "uuu_P6RemainingEarlyStart":"2030-08-06T08:00:00",
        "uuu_P6AtCompletionDuration":"1827.0",
        "uuu_P6PercentComplete":"0.0",
        "uuu_P6CPIndex":"0.0",
        "uuu_P6VAC":"0.0",
        "uuu_P6PerfPercComplete":"0.0",
        "uuu_P6RemainingTotalCost":"1461600.0",
        "uuu_P6PlannedDuration":"1827.0",
        "uuu_P6ActivityStatus":"Not Started",
        "uuu_P6AtCompletionTotalCost":"1461600.0",
        "uuu_P6PVCost":"0.0",
        "uuu_P6SPIndex":"0.0",
        "uuu_P6ActualTotalCost":"0.0",
        "uuu_P6PlannedStart":"2030-08-06T08:00:00",
        "uuu_P6PlannedTotalUnits":"1827.0",
        "uuu_P6Start":"2030-08-06T08:00:00",
        "uuu_P6RemainingDuration":"1827.0",
        "uuu_P6Finish":"2037-08-05T16:00:00"
    },
    {
        "uuu_P6ActivityId":"A1001",
         "uuu_P6ActivityName":"Act2",
        "uuu_P6EACCost":"0.0",
        "uuu_P6ScheduleVariance":"0.0",
        "uuu_P6ActualTotalUnits":"0.0",
        "uuu_P6ActualStart":"",
        "uuu_P6AtCompletionTotalUnits":"1827.0",
        "uuu_P6ActualDuration":"0.0",
        "uuu_P6ActualFinish":"",
        "uuu_P6WBSName":"New WBS-1",
        "uuu_P6WBSCode" :"wbs-1",
        "uuu_P6WBSPath":"Msk-P1.1.11",
        "uuu_P6CostVariance":"0.0",
```

```
            "uuu_P6BAC":"1461600.0",
            "uuu_P6RemainingEarlyFinish":"2037-08-05T16:00:00",
            "uuu_P6PlannedFinish":"2037-08-05T16:00:00",
            "uuu_P6EVCost":"0.0",
            "uuu_P6PlannedTotalCost":"1461600.0",
            "uuu_P6ActivityType":"Task Dependent",
            "uuu_P6ETC":"1461600.0",
            "uuu_P6RemainingTotalUnits":"1827.0",
            "uuu_P6RemainingEarlyStart":"2030-08-06T08:00:00",
            "uuu_P6AtCompletionDuration":"1827.0",
            "uuu_P6PercentComplete":"0.0",
            "uuu_P6CPIndex":"0.0",
            "uuu_P6VAC":"0.0",
            "uuu_P6PerfPercComplete":"0.0",
            "uuu_P6RemainingTotalCost":"1461600.0",
            "uuu_P6PlannedDuration":"1827.0",
            "uuu_P6ActivityStatus":"Not Started",
            "uuu_P6AtCompletionTotalCost":"1461600.0",
            "uuu_P6PVCost":"0.0",
            "uuu_P6SPIndex":"0.0",
            "uuu_P6ActualTotalCost":"0.0",
            "uuu_P6PlannedStart":"2030-08-06T08:00:00",
            "uuu_P6PlannedTotalUnits":"1827.0",
            "uuu_P6Start":"2030-08-06T08:00:00",
            "uuu_P6RemainingDuration":"1827.0",
            "uuu_P6Finish":"2037-08-05T16:00:00"
      }

      ]
}
```


Sample Invalid Response 1


```
{
```

```
    "data": [],
    "message": [
        "Empty value for mandatory field : uuu_P6ActivityId"
    ],
    "status": 12029,
    "rest_audit_id": 17155
}
```


Sample Error Response When Invalid activitySheetType Parameter is Given in the Request

An example of an invalid API request and response is provided below.

Sample Invalid Request 2


```
{
   "options":{
      "project_number":"P-0103",
      "source":"Primavera Cloud",
      "sourceProjectId":"ActSpread",
      "activitySheetType": "system123",
      "removeUnreferencedData": false,
      "activitySheetName1":"System Activity Sheet"

   },
  "data":[  {
        "uuu_P6ActivityId":"A1000",
         "uuu_P6ActivityName":"Act1",
        "uuu_P6EACCost":"0.0",
        "uuu_P6ScheduleVariance":"0.0",
        "uuu_P6ActualTotalUnits":"0.0",
        "uuu_P6ActualStart":"",
        "uuu_P6AtCompletionTotalUnits":"1827.0",
        "uuu_P6ActualDuration":"0.0",
        "uuu_P6ActualFinish":"",
        "uuu_P6WBSName":"New WBS-1",
        "uuu_P6WBSCode" :"wbs-1",
        "uuu_P6WBSPath":"Msk-P1.1.11",
```

```
        "uuu_P6CostVariance":"0.0",
        "uuu_P6BAC":"1461600.0",
        "uuu_P6RemainingEarlyFinish":"2037-08-05T16:00:00",
        "uuu_P6PlannedFinish":"2037-08-05T16:00:00",
        "uuu_P6EVCost":"0.0",
        "uuu_P6PlannedTotalCost":"1461600.0",
        "uuu_P6ActivityType":"Task Dependent",
        "uuu_P6ETC":"1461600.0",
        "uuu_P6RemainingTotalUnits":"1827.0",
        "uuu_P6RemainingEarlyStart":"2030-08-06T08:00:00",
        "uuu_P6AtCompletionDuration":"1827.0",
        "uuu_P6PercentComplete":"0.0",
        "uuu_P6CPIndex":"0.0",
        "uuu_P6VAC":"0.0",
        "uuu_P6PerfPercComplete":"0.0",
        "uuu_P6RemainingTotalCost":"1461600.0",
        "uuu_P6PlannedDuration":"1827.0",
        "uuu_P6ActivityStatus":"Not Started",
        "uuu_P6AtCompletionTotalCost":"1461600.0",
        "uuu_P6PVCost":"0.0",
        "uuu_P6SPIndex":"0.0",
        "uuu_P6ActualTotalCost":"0.0",
        "uuu_P6PlannedStart":"2030-08-06T08:00:00",
        "uuu_P6PlannedTotalUnits":"1827.0",
        "uuu_P6Start":"2030-08-06T08:00:00",
        "uuu_P6RemainingDuration":"1827.0",
        "uuu_P6Finish":"2037-08-05T16:00:00"
    },
    {
        "uuu_P6ActivityId":"A1001",
         "uuu_P6ActivityName":"Act2",
        "uuu_P6EACCost":"0.0",
        "uuu_P6ScheduleVariance":"0.0",
        "uuu_P6ActualTotalUnits":"0.0",
```

```
"uuu_P6ActualStart":"",
"uuu_P6AtCompletionTotalUnits":"1827.0",
"uuu_P6ActualDuration":"0.0",
"uuu_P6ActualFinish":"",
"uuu_P6WBSName":"New WBS-1",
"uuu_P6WBSCode" :"wbs-1",
"uuu_P6WBSPath":"Msk-P1.1.11",
"uuu_P6CostVariance":"0.0",
"uuu_P6BAC":"1461600.0",
"uuu_P6RemainingEarlyFinish":"2037-08-05T16:00:00",
"uuu_P6PlannedFinish":"2037-08-05T16:00:00",
"uuu_P6EVCost":"0.0",
"uuu_P6PlannedTotalCost":"1461600.0",
"uuu_P6ActivityType":"Task Dependent",
"uuu_P6ETC":"1461600.0",
"uuu_P6RemainingTotalUnits":"1827.0",
"uuu_P6RemainingEarlyStart":"2030-08-06T08:00:00",
"uuu_P6AtCompletionDuration":"1827.0",
"uuu_P6PercentComplete":"0.0",
"uuu_P6CPIndex":"0.0",
"uuu_P6VAC":"0.0",
"uuu_P6PerfPercComplete":"0.0",
"uuu_P6RemainingTotalCost":"1461600.0",
"uuu_P6PlannedDuration":"1827.0",
"uuu_P6ActivityStatus":"Not Started",
"uuu_P6AtCompletionTotalCost":"1461600.0",
"uuu_P6PVCost":"0.0",
"uuu_P6SPIndex":"0.0",
"uuu_P6ActualTotalCost":"0.0",
"uuu_P6PlannedStart":"2030-08-06T08:00:00",
"uuu_P6PlannedTotalUnits":"1827.0",
"uuu_P6Start":"2030-08-06T08:00:00",
"uuu_P6RemainingDuration":"1827.0",
"uuu_P6Finish":"2037-08-05T16:00:00"
```

```
   }

   ]
}
```

Sample Invalid Response 2

```
{
    "data": [],
    "message": [
        "Invalid value was found in a field: [activitySheetType]. Allowed values: [manual, system]"
    ],
    "status": 12011,
    "rest_audit_id": 17153
}
```

Get Activities from the System Activity Sheet of a Specific Shell

Get /ws/rest/service/v2/activity/sheet/activities?project_number={project number}&source_project_id={integrated source project id}

Purpose:

Retrieve a list of activities from the System Activity Sheet of a shell based on the project number and source project ID mentioned in the query parameters.

Request Parameters

Field Name	Data Type	Description
project_number	String	A valid 'Active' Unifier shell number (shell number into which the system is going to update project details). For example, "P-0001."
source_project_id	String	The Primavera Cloud project code. For example, "Msk-P1."

Validation Use-Cases and Error Codes

Use-Case	Status	Message
project_number not given or blank	620	Missing Project Number.
Invalid project_number	602	Project/Shell Number is not correct.
Inactive/On Hold project_number	12020	The API request contains an invalid value: [project_number]. Please check the status of this project_number in Unifier.
If this source_project_id is not configured in the source unifier shell	12205	The API request contains an invalid value: [source_project_id]. Please check if this source_project_id has been configured in Unifier.
Invalid Special characters source_project_id	12204	The API request contains an special characters: [source_project_id]. Please check if this source_project_id should not contain characters: / \\ : * ? \" < > | ' =
Blank source_project_id	12201	The API request is missing the required information: [source_project_id].
Length of source_project_id	12202	Invalid value was found in a field: 'source_project_id'. Allowed length: [250].

Responses

If the project number and the source project ID is correct, a success response is displayed.

If any of the validations are not satisfied, then the response will return a message and the data will return as empty.

Sample Response Success Output


```
{
    "data": [
        {
            "uuu_P6ActualTotalUnits": 0.0,
            "uuu_P6EACCost": 0.0,
```

```
"uuu_P6ScheduleVariance": 0.0,
"uuu_P6ActualStart": null,
"uuu_P6AtCompletionTotalUnits": 1827.0,
"uuu_P6ActualDuration": 0.0,
"uuu_P6Finish": "2037-08-05T16:00:00",
"uuu_P6WBSName": "New WBS-1",
"uuu_P6WBSPath": "Msk-P1.1.11",
"uuu_P6CostVariance": 0.0,
"uuu_P6BAC": 1461600.0,
"uuu_P6RemainingEarlyFinish": "2037-08-05T16:00:00",
"uuu_P6PlannedFinish": "2037-08-05T16:00:00",
"id": 1482360,
"uuu_P6EVCost": 0.0,
"uuu_P6ActivityName": "Act1",
"uuu_P6PlannedTotalCost": 1461600.0,
"uuu_P6ActivityType": "Task Dependent",
"uuu_P6ActualFinish": null,
"uuu_P6ETC": 1461600.0,
"uuu_P6RemainingEarlyStart": "2030-08-06T08:00:00",
"uuu_P6RemainingTotalUnits": 1827.0,
"uuu_P6ActivityId": "A1000",
"uuu_P6AtCompletionDuration": 1827.0,
"uuu_P6PercentComplete": 0.0,
"uuu_P6CPIndex": 0.0,
"uuu_P6WBSCode": "wbs-1",
"uuu_P6VAC": 0.0,
"uuu_P6PerfPercComplete": 0.0,
"uuu_P6RemainingTotalCost": 1461600.0,
"uuu_P6ActivityStatus": "Not Started",
"uuu_P6PlannedDuration": 1827.0,
"uuu_P6ActualTotalCost": 0.0,
"uuu_P6AtCompletionTotalCost": 1461600.0,
"uuu_P6PVCost": 0.0,
"uuu_P6SPIndex": 0.0,
```

```
        "uuu_P6PlannedStart": "2030-08-06T08:00:00",
        "uuu_P6PlannedTotalUnits": 1827.0,
        "uuu_P6Start": "2030-08-06T08:00:00",
        "uuu_P6RemainingDuration": 1827.0
    },
    {
        "uuu_P6ActualTotalUnits": 0.0,
        "uuu_P6EACCost": 0.0,
        "uuu_P6ScheduleVariance": 0.0,
        "uuu_P6ActualStart": null,
        "uuu_P6AtCompletionTotalUnits": 1827.0,
        "uuu_P6ActualDuration": 0.0,
        "uuu_P6Finish": "2037-08-05T16:00:00",
        "uuu_P6WBSName": "New WBS-1",
        "uuu_P6WBSPath": "Msk-P1.1.11",
        "uuu_P6CostVariance": 0.0,
        "uuu_P6BAC": 1461600.0,
        "uuu_P6RemainingEarlyFinish": "2037-08-05T16:00:00",
        "uuu_P6PlannedFinish": "2037-08-05T16:00:00",
        "id": 1482361,
        "uuu_P6EVCost": 0.0,
        "uuu_P6ActivityName": "Act2",
        "uuu_P6PlannedTotalCost": 1461600.0,
        "uuu_P6ActivityType": "Task Dependent",
        "uuu_P6ActualFinish": null,
        "uuu_P6ETC": 1461600.0,
        "uuu_P6RemainingEarlyStart": "2030-08-06T08:00:00",
        "uuu_P6RemainingTotalUnits": 1827.0,
        "uuu_P6ActivityId": "A1001",
        "uuu_P6AtCompletionDuration": 1827.0,
        "uuu_P6PercentComplete": 0.0,
        "uuu_P6CPIndex": 0.0,
        "uuu_P6WBSCode": "wbs-1",
        "uuu_P6VAC": 0.0,
```

```
        "uuu_P6PerfPercComplete": 0.0,
        "uuu_P6RemainingTotalCost": 1461600.0,
        "uuu_P6ActivityStatus": "Not Started",
        "uuu_P6PlannedDuration": 1827.0,
        "uuu_P6ActualTotalCost": 0.0,
        "uuu_P6AtCompletionTotalCost": 1461600.0,
        "uuu_P6PVCost": 0.0,
        "uuu_P6SPIndex": 0.0,
        "uuu_P6PlannedStart": "2030-08-06T08:00:00",
        "uuu_P6PlannedTotalUnits": 1827.0,
        "uuu_P6Start": "2030-08-06T08:00:00",
        "uuu_P6RemainingDuration": 1827.0
    },
    {
        "uuu_P6ActualTotalUnits": 0.0,
        "uuu_P6EACCost": 0.0,
        "uuu_P6ScheduleVariance": 0.0,
        "uuu_P6ActualStart": null,
        "uuu_P6AtCompletionTotalUnits": 1827.0,
        "uuu_P6ActualDuration": 0.0,
        "uuu_P6Finish": "2037-08-05T16:00:00",
        "uuu_P6WBSName": "New WBS-1",
        "uuu_P6WBSPath": "Msk-P1.1.11",
        "uuu_P6CostVariance": 0.0,
        "uuu_P6BAC": 1461600.0,
        "uuu_P6RemainingEarlyFinish": "2037-08-05T16:00:00",
        "uuu_P6PlannedFinish": "2037-08-05T16:00:00",
        "id": 1482359,
        "uuu_P6EVCost": 0.0,
        "uuu_P6ActivityName": "Act1",
        "uuu_P6PlannedTotalCost": 1461600.0,
        "uuu_P6ActivityType": "Task Dependent",
        "uuu_P6ActualFinish": null,
        "uuu_P6ETC": 1461600.0,
```

```
            "uuu_P6RemainingEarlyStart": "2030-08-06T08:00:00",
            "uuu_P6RemainingTotalUnits": 1827.0,
            "uuu_P6ActivityId": "true",
            "uuu_P6AtCompletionDuration": 1827.0,
            "uuu_P6PercentComplete": 0.0,
            "uuu_P6CPIndex": 0.0,
            "uuu_P6WBSCode": "wbs-1",
            "uuu_P6VAC": 0.0,
            "uuu_P6PerfPercComplete": 0.0,
            "uuu_P6RemainingTotalCost": 1461600.0,
            "uuu_P6ActivityStatus": "Not Started",
            "uuu_P6PlannedDuration": 1827.0,
            "uuu_P6ActualTotalCost": 0.0,
            "uuu_P6AtCompletionTotalCost": 1461600.0,
            "uuu_P6PVCost": 0.0,
            "uuu_P6SPIndex": 0.0,
            "uuu_P6PlannedStart": "2030-08-06T08:00:00",
            "uuu_P6PlannedTotalUnits": 1827.0,
            "uuu_P6Start": "2030-08-06T08:00:00",
            "uuu_P6RemainingDuration": 1827.0
        }
    ],


    "message": [
        "success"
    ],
    "status": 200,
    "rest_audit_id": 17150
}
```


Sample Error Response Output

If the API request contains special characters in the `source_project_id`, the following response is generated.

```
{
    "data": [],
    "message": [
        "The API request contains an special characters:
[source_project_id]. Please check if this source_project_id should not
contain characters: / \\ : * ? \" < > | ' ="
    ],
    "status": 12022,
    "rest_audit_id": 4180
}
```


Create, Update, and Delete Activities in the Manual Activity Sheet of a Specific Shell

Post /ws/rest/service/v2/activity/sheet/manualactivities

Purpose

Create, update, and delete activities in the Manual Activity Sheet of a shell for a project number and the activity sheet name specified in the input parameters.

Activities data passed as part of the Activity API will be created, updated or removed based on the details below:

- Create: If the API request has activities for which the Activity ID is not present in the system, then the Activity data will be created or added by the API request.
- Update: If the API request has activities for which the Activity ID is already present in the system, then the Activity data will be updated by the API request.
- Remove: In the API request options if the remove unreferenced data value passes as as true, then all the activities not present in the API request but already present in Unifier will be removed.

Prerequisites

The activity sheet should be manually created in the Activity Sheet sub-node.

To link or associate activities to WBS codes in the request parameters, ensure that the WBS codes are already created in the WBS sheet using the WBS REST API manually or by integration.

Notes:

- The API uses fields added in the Integration form of the Activity Sheet (uDesigner). The fields which have not been added in the integration form will still adhere to the logic defined in the next section for auto-population, but will not be present in the API payload or response.
- All the request parameter type related validations are applied based

on the definitions present in the Detail form. For example, the length of string. Only the Activity ID and Activity Name length checks will be considered as given in the table below.

- The mandatory elements defined in the Detail form are the mandatory elements in this API. If there are any fields which are not given in the mandatory list below but are still in the Manual Activity Sheet detail form marked as Required, then the API will throw an appropriate error if the values are not applicable for those fields.
- For the Manual Activity Sheet, all Timestamp (dates) and related fields are considered only in hours. If the request has minutes, it will be ignored.
- All Read-only attributes of the Detail form will not be considered for updates through the API (though the values are passed in the API request).

In the Read-Only field, the behavior should not be changed in the Detail form as it can create corrupt data:

- `uuu_P6ActualTotalCost`
- `uuu_P6ActualTotalUnits`
- `uuu_P6PlannedTotalCost`
- `uuu_P6PlannedTotalUnits`
- `uuu_P6AtCompletionTotalCost`
- `uuu_P6AtCompletionTotalUnits`
- `uuu_P6AtCompletionDuration`
- `uuu_P6RemainingTotalCost`
- `uuu_P6RemainingTotalUnits`
- `uuu_P6BAC`
- `uuu_P6CPIndex`
- `uuu_P6CSIndex`
- `uuu_P6CostVariance`
- `uuu_P6EVCost`
- `uuu_P6EACCost`
- `uuu_P6ETC`
- `uuu_P6SPIndex`
- `uuu_P6ScheduleVariance`
- `uuu_P6TCPIndex`
- `uuu_P6VAC`
- `uuu_float`
- `uuu_P6PVCost`
- `uuu_P6WBSCode`
- `uuu_P6WBSName`
- `uuu_P6WBSPath`
- `uuu_P6PerfPercComplete`

Request Parameters

The Request parameters are a JSON Map {} - structure `{"options":{}, "data":[] }`

For the `"options"` JSON Map, the following fields and validations are applicable.

Mandatory Fields For "options" JSON Map

The following mandatory fields are applicable to the `"options"` JSON Map.

Field Name	Data Type	Description
`project_number`	String	A valid 'Active' Unifier shell number (shell number into which the system is going to update project details). For example, "P-0001."
`activitySheetName`	String	The name of the manual Activity Sheet into which activities are inserted, updated or removed. If there is no activity sheet present with this name, then error will be thrown. For example, "Activity Sheet 1."

Optional Fields

The following optional fields are applicable to the `"options"` JSON Map.

Field Name	Data Type	Description
`removeUnreferencedData`	Boolean	Accepts only true or false. If this value is true, the activities in the API request will be created and updated. Activities that do no exist in the request data will be removed from the existing activity sheet. If this value is false, the activities in the API request will not be removed from the existing activity sheet. Activities will be created from the request data if they are not existing or updated if they are existing. If the attribute does not pass in the request, the default value is considered as false. The activity data that does not exist in the current API request data will not be removed.

Validation Use-Cases and Error Codes

The following messages are displayed for `"options"` JSON Map.

Use-Case	Status	Message
project_number not given.	12018	The API request is missing the required information: [project_number].
Invalid project_number	602	Project/Shell Number is not correct.
Inactive project_number	1219	Project status is Inactive.
project_number is empty/blank	12128	The API request contains empty value for: [project_number].
If activity sheet name is empty or null	12012	The API request is missing the required information: [activitySheetName].

Use-Case	Status	Message
Activity Sheet Name exceeded 250 characters.	12017	Invalid value was found in a field: [activitySheetName]. Allowed length: [250]
Activity Sheet Name doesn't exist.	12013	The API request contains an invalid value: [activitySheetName]. Please check if this activitySheetName with type=manual has been configured in Unifier.
Non boolean value provided in removeUnreferencedData	12031	Invalid value was found in a field: [removeUnreferencedData]. Allowed only boolean value.

Mandatory Fields For "data" JSON Map

Apart from the list of mandatory fields below, any fields added as *Required* in the Activity Sheet, uDesigner, or Detail form are also considered as mandatory by the API, and appropriate error messages will be displayed if the field does not pass for any of the mandatory fields.

Field Name	Data Type	Description
`uuu_P6ActivityId`	String	The ID or Activity code. This is expected to be unique for each activity in the activity sheet. For example, "A1000".
`uuu_P6ActivityName`	String	Name of the Activity.
`uuu_P6Start`	Timestamp	If this data element is not provided in the API, throw an error. If this value is provided in the API, check if uuu_P6Start >= Project Schedule Start Date; otherwise, throw an error. For example, "2022-12-13T08:00:00".

Field Name	Data Type	Description
`uuu_P6Finish`	Timestamp	If this data element is not provided in the API, throw an error. If this value is provided in the API, check if uuu_P6Finish >= uuu_P6Start; otherwise, throw an error. If Activity Type = Start Milestone If this value is provided in the API, check if uuu_P6Finish = uuu_P6Start; otherwise, throw an error. For example, "2022-12-15T16:00:00."
`uuu_P6Duration`	Integer	If this data element is not provided in the API, throw an error. If this value is provided in the API, check if it is double & >=0; otherwise, throw an error. If this value is provided in the API, check if it is uuu_P6Duration=Finish-Start; otherwise, throw an error. If this value is not provided in the API, update it as Finish-Start.

Validation Use-Cases and Error Codes For "Data" JSON Map

The following messages are displayed for `"Data"` JSON Map.

Use-Case	Status	Message
Activity Id exceeds 120 characters.	12003	Invalid value was found in a field: [uuu_P6ActivityId]. Allowed length: [250]. Activity Id: <Activity Id>

Use-Case	Status	Message
Duplicate Activity ID exists in Sheet.	12001	Invalid value was found in a field: [uuu_P6ActivityId]. This uuu_P6ActivityId already exists. Activity Id: <Activity Id>
If not provided in API	12009	The API request is missing the required information: [uuu_P6ActivityId]. Activity Id: <Activity Id>
Activity Id cannot be blank.	12030	The API request contains an empty value for:[uuu_P6ActivityId].
Activity Name exceeds 250 characters.	12002	Invalid value was found in a field: [uuu_P6ActivityName]. Allowed length: [250]. Activity Id: <Activity Id>
Activity Name Missing in payload.	12004	The API request is missing the required information: [uuu_P6ActivityName].
Activity Name cannot be blank.	12030	The API request contains an empty value for: [uuu_P6ActivityName].
If not provided in the API, then throw an error.	12007	The API request is missing required information: [uuu_P6Start]. Activity ID: <activityId>.
Invalid uuu_P6Start format or null or empty value provided in the API Request.	12620	The API request contains an invalid value: [uuu_P6Start]. Correct date format [yyyy-MM-ddTHH:mm:ss]. Activity ID: <activityId>.
uuu_P6Start provided is on holiday or non-working day	12672	Invalid value was found in a field: [uuu_P6Start]. Please provide a working day according to the calendar. Activity ID: <activityId>

Use-Case	Status	Message
If uuu_P6Start < Project Schedule Start Date	12041	Invalid value was found in a field [uuu_P6Start]. The value provided should be greater than or equal to Project Schedule Start Date. Activity ID: <activityId>
Time provided is outside the working hours	12065	Invalid value was found in a field [uuu_P6Start]. Cannot update uuu_P6Start as the time is outside the working hours according to the calendar. Activity ID: <activityId>

Optional Fields

The following list of fields are validated only if they are added in the Integration form. If they are present in the Integration form they will be ignored and the values will not update in the Activity Sheet.

Field Name	Data Type	Description
`uuu_P6ActivityCalendar`	String	If this value is not provided in the API, then it will be populated with the default value defined in the Activity Sheet properties. If the calendar is explicitly specified in the API, validate that the calendar name exists as custom calendars or company calendars. For example, "Company Calendar".

Field Name	Data Type	Description
uuu_P6ActivityStatus	String	If this value is provided in the API, then check for the actual start value and proceed with updating accordingly. If this value is not provided in the API, then it will be considered as "Not Started." New activities and the current status will be considered for existing activities. If Activity Type = Start Milestone If uuu_P6ActualStart or uuu_P6ActualFinish is provided and uuu_P6ActivityStatus is not provided, then the status will be considered as Completed. If uuu_P6ActualStart or uuu_P6ActualFinish is provided and uuu_P6ActivityStatus != Completed then throw an error. If uuu_P6ActualStart and uuu_P6ActualFinish is empty or not provided and uuu_P6ActivityStatus != Not Started, then throw an error.

Field Name	Data Type	Description
uuu_P6PlannedStart	Timestamp	The planned start of an activity. If this value is provided in the API, check if it is in the correct date format; otherwise, throw an error. If this value is provided in the API, check if the date entered >= Project Schedule Start Date; otherwise, throw an error. For Status = Not Started If this value is not provided in the API, default it to P6Start. If this value is provided in the API, check if P6Start = PlannedStart; otherwise, throw an error. For example, "2022-12-13T08:00:00."

Field Name	Data Type	Description
uuu_P6PlannedFinish	Timestamp	The planned finish of an activity. If this value is provided in the API, check if it is in the correct date format; otherwise, throw an error. If this value is provided in the API, check if the date entered >= Planned Start Date; otherwise, throw an error. If this value is not provided in the API, default it to P6Finish. If Status = Not Started If this value is provided in the API, check if P6Finish = PlannedFinish; otherwise, throw an error. If Activity Type = Start Milestone If this value is provided in the API, check if uuu_P6PlannedFinish = uuu_P6PlannedStart; otherwise, throw an error. For example, "2022-12-15T16:00:00."
uuu_P6PlannedFinish	Integer	If this value is provided in the API, check if its value is a positive integer; otherwise, throw an error. If this value is provided in the API, check if its uuu_P6PlannedDuration=uuu_P6PlannedFinish -uuu_P6PlannedStart; otherwise, throw an error. If this value is not provided in the API, update it as uuu_P6PlannedFinish -uuu_P6PlannedStart. For example, 10.

Field Name	Data Type	Description
uuu_P6ActualStart	Timestamp	If uuu_P6ActivityStatus =In Progress OR Completed This will be updated from the API Request without any changes to uuu_P6ActivityStatus. If uuu_P6ActivityStatus = Not Started If it is not provided in the API request, uuu_P6ActivityStatus will remain "Not Started." If it is provided in the API request and the uuu_P6ActualFinish is not provided, the uuu_P6ActivityStatus will be updated to "In Progress." If it is provided in the API request, the uuu_P6ActualFinish is not provided and the uuu_P6ActivityStatus is provided in the API but is not equal to In Progress or Completed, then throw an error. For example, "2022-12-13T16:00:00."

Field Name	Data Type	Description
uuu_P6ActualFinish	Timestamp	If uuu_P6ActivityStatus = Not Started OR In Progress If it is provided in the API request, then the uuu_P6ActivityStatus will be updated to "Completed." If it is provided in the API request, and the uuu_P6ActivityStatus is also provided in the API but is not equal to Completed, throw an error. If Activity Type = Start Milestone If uuu_P6ActivityStatus = completed and this value is provided in the API, check if uuu_P6ActualFinish = uuu_P6ActualStart; otherwise, throw an error. For example, "2022-12-13T16:00:00."
uuu_P6RemainingEarlyStart	Timestamp	If this value is provided in the API, check if it is in the correct date format; otherwise, throw an error. If this value is provided in the API, check if date entered >= Project Schedule Start Date; otherwise, throw an error. For uuu_P6ActivityStatus = Not Started If this value is not provided in the API then default it to P6Start. For uuu_P6ActivityStatus = Completed If this value is provided in the API, throw an error. For example, "2022-12-13T08:00:00."

Field Name	Data Type	Description
uuu_P6RemainingEarlyFinish	Timestamp	If this value is provided in the API, check if it is in correct date format; otherwise, throw an error. If this value is provided in the API, check if the date entered >= Remaining Start Date; otherwise, throw an error. If this value is not provided in the API, default it to P6Finish. For uuu_P6ActivityStatus = Completed If this value is provided in the API, throw an error. For example, "2022-12-15T16:00:00."
uuu_P6RemainingDuration	Integer	If this value is provided in the API, check if it is a positive integer value; otherwise, throw an error. If this value is provided in the API, check if it is uuu_P6RemainingDuration =uuu_P6RemainingEarlyFinish-uuu_P6RemainingEarlyStart; otherwise, throw an error. If this value is not provided in the API, update it as Finish-Start. For uuu_P6ActivityStatus = Completed If this value is provided in the API, throw an error. For example, 10.

Field Name	Data Type	Description
uuu_activity_constraint_type	String	If this value is provided in the API, check if it is [As soon as possible]; otherwise, throw an error. If this value is not provided in the API, update it as "As soon as possible."
uuu_duration_type	String	If this value is provided in the API, check if it is [Fixed Duration, Fixed Units, Fixed units/time]; otherwise, throw an error. If this value is not provided in the API, update it as "Fixed Duration."
uuu_P6ActivityType	String	If this value is provided in the API then check if it is [Task Dependent, Start Milestone]; otherwise, throw an error. If this value is not provided in the API, it will be populated with the value - Task Dependant. If uuu_P6ActivityType value is provided in the API and is updated to Start Milestone, check if Assignments are existing. If assignments exist throw an error. You will have to manually remove the assignments to proceed. If the uuu_P6ActivityType value is provided in the API as Task Dependent and uuu_P6Duration is 0, then throw an error.

Field Name	Data Type	Description
bItemID	String	This can be updated from the API Request. The full path of the CBS Code with the entire hierarchy present in the Cost Sheet has to be given, otherwise it will throw an error. "~~" will be used as path separators for the hierarchy. If an Inactive costCode is provided in the request, the system checks for the following: If it creates a new activity, the system will throw an error related to inactive costCode. If it is an update of the activity, the system will compare the existing costCode for that activity. If it is same as the existing one, the system will not throw an error. Instead, the system will skip the update of the costCode. But, if it is not same as the existing costCode, the system will throw an error related to the inactive costCode. For example, "C-001~~C-0011."
uuu_cmwbs_picker	String	This can be updated from the API Request. If the WBS Sheet does not exist in the shell, throw an error. If the WBS code does not exist in the WBS Sheet throw an error. For example, "P-001.WBS1."

Field Name	Data Type	Description
uuu_P6PercentComplete	Integer	This can be updated in the API Request. For uuu_P6ActivityStatus = Not Started This value should be zero. If the value is provided in the API Request and the value is not zero, throw an error. For uuu_P6ActivityStatus = In Progress If this value is provided in the API, it should be in the range of [0-100]. For uuu_P6ActivityStatus = Completed This value should be 100. If the value is provided in the API Request and it is not equal to 100, then throw error. For example, 50.

Validation Use-Cases and Error Codes

The following messages are displayed for "Data" JSON Map.

Use-case	Status	Message
Invalid uuu_P6ActivityCalendar value provided (Non-String) or null or empty value provided in the API Request.	12045	Invalid value was found in a field [uuu_P6ActivityCalendar]. Allowed only string values. Activity ID: <activityId>
Calendar not configured in the Unifier Shell/Project	12046	Invalid value was found in a field [uuu_P6ActivityCalendar]. Allowed only Calendars configured in the respective Unifier Project/Shell. Activity ID: <activityId>

Use-case	Status	Message
Invalid value or format or null or empty value provided in the API Request	12042	Invalid value was found in a field [uuu_P6ActivityStatus]. Allowed values: [Not Started, In Progress, Completed]. Activity ID: <activityId>
If uuu_P6ActualStart is provided and uuu_P6ActivityStatus is provided as Not Started.	12051	Invalid value was found in a field: [uuu_P6ActivityStatus]. Cannot update uuu_P6ActivityStatus to Not Started, if uuu_P6ActualStart is not empty. Activity ID: <activityId>
If uuu_P6ActualFinish is provided and uuu_P6ActivityStatus is provided as "In Progress".	12051	Invalid value was found in a field: [uuu_P6ActivityStatus]. Cannot update uuu_P6ActivityStatus to In Progress, if uuu_P6ActualFinish is not empty. Activity ID: <activityId>
If uuu_P6ActualStart is empty or not provided in the API and Status is equal to In Progress or Completed	12052	Invalid value was found in a field: [uuu_P6ActivityStatus]. Cannot update uuu_P6ActivityStatus to In Progress or Completed, if uuu_P6ActualStart is empty. Activity ID: <activityId>
If uuu_P6ActualFinish is empty or not provided in the API and Status is equal to Completed	12053	Invalid value was found in a field: [uuu_P6ActivityStatus]. Cannot update uuu_P6ActivityStatus to Completed, if uuu_P6ActualFinish is empty. Activity ID: <activityId>

Use-case	Status	Message
If uuu_P6ActivityType = Start Milestone, and If uuu_P6ActualStart or uuu_P6ActualFinish is provided and uuu_P6ActivityStatus != Completed	12063	Invalid value was found in a field [uuu_P6ActivityStatus]. Cannot update uuu_P6ActivityStatus to Not Started or In Progress, if uuu_P6ActivityType = Start Milestone and either uuu_P6ActualStart or uuu_P6ActualFinish is not empty. Activity ID: <activityId>
If uuu_P6ActivityType = Start Milestone, and If uuu_P6ActualStart and uuu_P6ActualFinish are empty and uuu_P6ActivityStatus != Not Started	12062	Invalid value was found in a field [uuu_P6ActivityStatus]. Cannot update uuu_P6ActivityStatus to In Progress or Completed, if uuu_P6ActivityType = Start Milestone and uuu_P6ActualStart or uuu_P6ActualFinish are empty. Activity ID: <activityId>
Invalid uuu_P6PlannedStart format or null or empty value provided in the API Request.	12620	The API request contains an invalid value: [uuu_P6PlannedStart]. Correct date format [yyyy-MM-ddTHH:mm:ss]. Activity ID: <activityId>.
uuu_P6PlannedStart provided is on holiday or non-working day	12672	Invalid value was found in a field: [uuu_P6PlannedStart]. Please provide a working day according to the calendar. Activity ID: <activityId>
If uuu_P6PlannedStart < Project Schedule Start Date	12041	Invalid value was found in a field [uuu_P6PlannedStart]. The value provided should be greater than or equal to Project Schedule Start Date. Activity ID: <activityId>

Use-case	Status	Message
If Activity Status = Not Started & P6Start != PlannedStart	12039	Invalid value was found in a field [uuu_P6PlannedStart]. The value provided should be equal to uuu_P6Start, if uuu_P6ActivityStatus = Not Started. Activity ID: <activityId>
Time provided is outside the working hours	12065	Invalid value was found in a field [uuu_P6PlannedStart]. Cannot update uuu_P6PlannedStart as the time is outside the working hours according to the calendar. Activity ID: <activityId>
Invalid uuu_P6PlannedFinish format or null or empty value provided in the API Request.	12620	The API request contains an invalid value: [uuu_P6PlannedFinish]. Correct date format [yyyy-MM-ddTHH:mm:ss]. Activity ID: <activityId>.
uuu_P6PlannedFinish provided is on holiday or non-working day	12672	Invalid value was found in a field [uuu_P6PlannedFinish]. Please provide a working day according to the calendar. Activity ID: <activityId>
If uuu_P6PlannedFinish < uuu_P6PlannedStart	12038	Invalid value was found in a field [uuu_P6PlannedFinish]. The value provided should be greater than or equal to uuu_P6PlannedStart. Activity ID: <activityId>
If Activity Status = Not Started & P6Finish != PlannedFinish	12039	Invalid value was found in a field [uuu_P6PlannedFinish]. The value provided should be equal to uuu_P6Finish, if uuu_P6ActivityStatus = Not Started. Activity ID: <activityId>

Use-case	Status	Message
If uuu_P6ActivityType = Start Milestone, and if uuu_P6PlannedFinish != uuu_P6PlannedStart	12061	Invalid value was found in a field [uuu_P6PlannedFinish]. The value provided should be equal to uuu_P6PlannedStart, if uuu_P6ActivityType = Start Milestone. Activity ID: <activityId>
Time provided is outside the working hours	12065	Invalid value was found in a field [uuu_P6PlannedFinish]. Cannot update uuu_P6PlannedFinish as the time is outside the working hours according to the calendar. Activity ID: <activityId>
If uuu_P6PlannedDuration value provided is null	12047	Invalid value was found in a field [uuu_P6PlannedDuration]. Activity ID: <activityId>
Invalid uuu_P6PlannedDuration(Not Integer) or empty	12616	Invalid value was found in a field [uuu_P6PlannedDuration]. Allowed only positive decimal value. Activity ID: <activityId>
uuu_P6PlannedDuration is less than zero or exceeds 20000	12517	Invalid value was found in a field [uuu_P6PlannedDuration]. Allowed Range [0-20000]. Activity ID: <activityId>
If uuu_P6PlannedDuration != uuu_P6PlannedFinish - uuu_P6PlannedStart	12037	Invalid value was found in a field [uuu_P6PlannedDuration]. The value provided should be equal to (uuu_P6PlannedFinish - uuu_P6PlannedStart) of the activity, as per the calendar defined. Activity ID: <activityId>

Use-case	Status	Message
Invalid uuu_P6ActualStart format or null or empty value provided in the API Request	12620	The API request contains an invalid value: [uuu_P6ActualStart]. Correct date format [yyyy-MM-ddTHH:MM:SS]. Activity ID: <activityId>
If uuu_P6ActualStart provided is on holiday or non-working day	12672	Invalid value was found in a field: [uuu_P6ActualStart]. Please provide a working day according to the calendar. Activity ID: <activityId>
If uuu_P6ActualStart < Project Schedule Start Date	12041	Invalid value was found in a field [uuu_P6ActualStart]. The value provided should be greater than or equal to Project Schedule Start Date. Activity ID: <activityId>
If Activity Status = In Progress and uuu_P6ActualStart != P6Start	12048	Invalid value was found in a field [uuu_P6ActualStart]. The value provided should be equal to uuu_P6Start, if uuu_P6ActivityStatus = In Progress. Activity ID: <activityId>
If Activity Status = Completed and uuu_P6ActualStart != P6Start	12050	Invalid value was found in a field [uuu_P6ActualStart]. The value provided should be equal to uuu_P6Start, if uuu_P6ActivityStatus = Completed. Activity ID: <activityId>
If uuu_P6ActualStart > Today's date	12055	Invalid value was found in a field [uuu_P6ActualStart]. The value cannot be later than today. Activity ID: <activityId>

Use-case	Status	Message
Time provided is outside the working hours	12065	Invalid value was found in a field [uuu_P6ActualStart]. Cannot update uuu_P6ActualStart as the time is outside the working hours according to the calendar. Activity ID: <activityId>
Invalid uuu_P6ActualFinish format or null or empty value provided in the API Request.	12620	The API request contains an invalid value: [uuu_P6ActualFinish]. Correct date format [yyyy-MM-ddTHH:MM:SS]. Activity ID: <activityId>
If uuu_P6ActualFinish is provided is on holiday or non-working day	12672	Invalid value was found in a field [uuu_P6ActualFinish]. Please provide a working day according to the calendar. Activity ID: <activityId>
If uuu_P6ActualFinish < uuu_P6ActualStart	12038	Invalid value was found in a field [uuu_P6ActualFinish]. The value provided should be greater than or equal to uuu_P6ActualStart. Activity ID: <activityId>
If Activity Status = Completed and uuu_P6ActualStart != P6Start	12050	Invalid value was found in a field [uuu_P6ActualFinish]. The value provided should be equal to uuu_P6Finish, if uuu_P6ActivityStatus = Completed. Activity ID: <activityId>
If uuu_P6ActualFinish > Today's date	12055	Invalid value was found in a field [uuu_P6ActualFinish]. The value cannot be later than today. Activity ID: <activityId>

Use-case	Status	Message
If uuu_P6ActivityType = Start Milestone, and if uuu_P6ActualFinish != uuu_P6ActualStart	12061	Invalid value was found in a field [uuu_P6ActualFinish]. The value provided should be equal to uuu_P6ActualStart , if uuu_P6ActivityType = Start Milestone. Activity ID: <activityId>
Time provided is outside the working hours	12065	Invalid value was found in a field [uuu_P6ActualFinish]. Cannot update uuu_P6ActualFinish as the time is outside the working hours according to the calendar. Activity ID: <activityId>
Invalid uuu_P6RemainingEarlyStart format or null or empty value provided in the API Request.	12620	The API request contains an invalid value: [uuu_P6RemainingEarlyStart]. Correct date format [yyyy-MM-ddTHH:mm:ss]. Activity ID: <activityId>.
uuu_P6RemainingEarlyStart provided is on holiday or non-working day	12672	Invalid value was found in a field: [uuu_P6RemainingEarlyStart]. Please provide a working day according to the calendar. Activity ID: <activityId>
If uuu_P6RemainingEarlyStart < Project Schedule Start Date	12041	Invalid value was found in a field [uuu_P6RemainingEarlyStart]. The value provided should be greater than or equal to Project Schedule Start Date. Activity ID: <activityId>

Use-case	Status	Message
If value provided in the API Request for Activity Status=Completed	12040	Invalid value was found in a field [uuu_P6RemainingEarlyStart]. Cannot update uuu_P6RemainingEarlyStart if uuu_P6ActivityStatus = Completed. Activity ID: <activityId>
If Activity Status = Not Started & P6Start != uuu_P6RemainingEarlyStart	12039	Invalid value was found in a field [uuu_P6RemainingEarlyStart]. The value provided should be equal to uuu_P6Start, if uuu_P6ActivityStatus = Not Started. Activity ID: <activityId>
Time provided is outside the working hours	12065	Invalid value was found in a field [uuu_P6RemainingEarlyStart]. Cannot update uuu_P6RemainingEarlyStart as the time is outside the working hours according to the calendar. Activity ID: <activityId>
Invalid uuu_P6RemainingEarlyFinish format or null or empty value provided in the API Request.	12620	The API request contains an invalid value: [uuu_P6RemainingEarlyFinish]. Correct date format [yyyy-MM-ddTHH:mm:ss]. Activity ID: <activityId>.
uuu_P6RemainingEarlyFinish provided is on holiday or non-working day	12672	Invalid value was found in a field: [uuu_P6RemainingEarlyFinish]. Please provide a working day according to the calendar. Activity ID: <activityId>

Use-case	Status	Message
If uuu_P6RemainingEarlyFinish < uuu_P6RemainingEarlyStart	12038	Invalid value was found in a field [uuu_P6RemainingEarlyFinish]. The value provided should be greater than or equal to uuu_P6RemainingEarlyStart. Activity ID: <activityId>
If value provided in the API Request for Activity Status=Completed	12040	Invalid value was found in a field [uuu_P6RemainingEarlyFinish]. Cannot update uuu_P6RemainingEarlyFinish if uuu_P6ActivityStatus = Completed. Activity ID: <activityId>
If Activity Status = Not Started & P6Finish != uuu_P6RemainingEarlyFinish	12039	Invalid value was found in a field [uuu_P6RemainingEarlyFinish]. The value provided should be equal to uuu_P6Finish, if uuu_P6ActivityStatus = Not Started. Activity ID: <activityId>
Time provided is outside the working hours	12065	Invalid value was found in a field [uuu_P6RemainingEarlyFinish]. Cannot update uuu_P6RemainingEarlyFinish as the time is outside the working hours according to the calendar. Activity ID: <activityId>
If uuu_P6RemainingDuration value provided is null	12047	Invalid value was found in a field [uuu_P6RemainingDuration]. Activity ID: <activityId>
Invalid uuu_P6RemainingDuration(Not Integer) or empty	12616	Invalid value was found in a field: [uuu_P6RemainingDuration]. Allowed only positive decimal value. Activity ID: <activityId>

Use-case	Status	Message
uuu_P6RemainingDuration is less than zero or exceeds 20000	12617	Invalid value was found in a field: [uuu_P6RemainingDuration]. Allowed Range [0-20000]. Activity ID: <activityId>
If uuu_P6RemainingDuration != uuu_P6RemainingEarlyFinish - uuu_P6RemainingEarlyStart	12037	Invalid value was found in a field [uuu_P6RemainingDuration]. The value provided should be equal to (uuu_P6RemainingEarlyFinish - uuu_P6RemainingEarlyStart) of the activity, as per the calendar defined. Activity ID: <activityId>
Nonzero value provided in the API Request for Activity Status=Completed	12040	Invalid value was found in a field [uuu_P6RemainingDuration]. Cannot update uuu_P6RemainingDuration, if uuu_P6ActivityStatus = Completed. Activity ID: <activityId>
Invalid uuu_activity_constraint_type value provided (Non-String) or null or empty value provided in the API Request.	12043	Invalid value was found in a field [uuu_activity_constraint_type]. Allowed values: [As soon as possible]. Activity ID: <activityId>
Invalid uuu_duration_type value provided (Non-String) or null or empty value provided in the API Request.	12054	Invalid value was found in a field [uuu_duration_type]. Allowed values: [Fixed Duration, Fixed Units, Fixed units/time]. Activity ID: <activityId>
Invalid uuu_P6ActivityType value provided (Non-String) or null or empty value provided in the API Request.	12044	Invalid value was found in a field [uuu_P6ActivityType]. Allowed values: [Task Dependent, Start Milestone]. Activity ID: <activityId>

Use-case	Status	Message
If uuu_P6ActivityType value is provided as 'Start Milestone' and Assignments are existing	12064	Invalid value was found in a field [uuu_P6ActivityType]. Cannot update uuu_P6ActivityType to Start Milestone, if the activity has assigned resources. Activity ID: <activityId>
If uuu_P6ActivityType value is Task Dependent and uuu_P6Duration is 0, then throw error	12066	Invalid value was found in a field [uuu_P6ActivityType]. Cannot update uuu_P6ActivityType to Task Dependent, if the uuu_P6Duration is 0. Activity ID: <activityId>
Invalid costCode provided - (Non-String) or empty or null or blank	12609	Invalid value was found in a field: [costCode]. Allowed only string values. Activity ID: <activityId>
costCode not existing in Cost Sheet	12610	Invalid value was found in a field [costCode]. Allowed only the Cost codes present in Cost Sheet. Activity ID: <activityId>
Inactive costCode provided in the API request	12623	Invalid value was found in a field: [costCode]. Allowed only active Cost codes. Activity ID: <activityId>
Invalid WBS Code provided - (Non-String) or empty or null or blank	12056	Invalid value was found in a field: [uuu_cmwbs_picker]. Allowed only string values. Activity ID: <activityId>
WBS Code not existing in WBS Sheet or WBS Sheet is not existing	12057	Invalid value was found in a field [uuu_cmwbs_picker]. Allowed only the WBS codes present in WBS Sheet. Activity ID: <activityId>
If uuu_P6PercentComplete value provided is null	12047	Invalid value was found in a field [uuu_P6PercentComplete]. Activity ID: <activityId>

Use-case	Status	Message
Invalid uuu_P6PercentComplete (Not Integer or Not Double) or empty	12616	Invalid value was found in a field: [uuu_P6PercentComplete]. Allowed only positive integer value. Activity ID: <activityId>
uuu_P6PercentComplete is less than zero or exceeds 100	12058	Invalid value was found in a field: [uuu_P6PercentComplete]. Allowed Range [0-100]. Activity ID: <activityId>
Nonzero value provided in the API Request for uuu_P6ActivityStatus =Not Started	12059	Invalid value was found in a field [uuu_P6PercentComplete]. Value provided should be 0, if uuu_P6ActivityStatus = Not Started. Activity ID: <activityId>
If uuu_P6ActivityStatus = In Progress and uuu_P6PercentComplete is equal to 100	12067	Invalid value was found in a field [uuu_P6PercentComplete]. Value provided cannot be 100, if uuu_P6ActivityStatus = In Progress. Activity ID: <activityId>
If uuu_P6ActivityStatus = Completed and uuu_P6PercentComplete not equal to 100	12060	Invalid value was found in a field [uuu_P6PercentComplete]. Value provided should be 100, if uuu_P6ActivityStatus = Completed. Activity ID: <activityId>

Input Request Data Validations

For Input Request data validations which are not included in the request parameters section are listed below.

Scenario	Status	Message
If any of the mandatory elements, referencing uDesigner -> Activity Sheet Detail form, is missing.	12027	Mandatory fields are missing: {field name}.
If any of the mandatory elements, referencing uDesigner -> Activity Sheet Detail form, is empty.	12029	Empty value for mandatory field : {field name}.

Sample Response Format

```
JSON Map  {
                              "status" : <integer value> ,
                              "data" : [ ] ,
                               "messages": [ <list of string>] ,
                              "rest_audit_id": <id from the rest audit
table matching this request>
                           }
```

where

- "status" is of Integer data type
- "data" is a List of Maps data type
- "messages" is a list if String data type
- "rest_audit_id" is of integer data type

Sample Request

The following Sample Request is based on the Integration form designed in the respective environment. As mentioned above, integration form fields derive requests and responses in this API.

```
{
   "options":{
      "project_number":"P-0115",
      "removeUnreferencedData": true,
      "activitySheetName":"testSheet"
   },
  "data":[
```

```
{
            "uuu_P6ActivityId": "A1000",
            "uuu_P6ActivityName": "act0123345",
            "uuu_P6Start": "2023-11-02T08:00:00",
            "uuu_P6Finish": "2023-11-02T10:00:00",
            "uuu_P6ActivityType": "Task Dependent",
            "uuu_P6ActivityStatus": "Not Started",
            "uuu_activity_constraint_type": "As Soon As Possible",
            "uuu_duration_type": "Fixed Duration",
            "uuu_P6ActivityCalendar": "Project/Shell Calendar",
             "uuu_cmwbs_picker": "P-0115.WBSCODE10",
            "uuu_P6Duration": 2.0,
            "uuu_P6PlannedDuration":2.0,
            "uuu_P6WBSCode": "AV1",
            "bItemID": "01000~~01100",
            "CheckPullDown": "No",
             "uuu_P6ETCComputeType":"1/(BAC-EV)",
  },
   {
            "uuu_P6ActivityId": "A1010",
            "uuu_P6ActivityName": "act0123345",
            "uuu_P6Start": "2023-11-02T08:00:00",
            "uuu_P6Finish": "2023-11-02T10:00:00",
            "uuu_P6ActivityType": "Task Dependent",
            "uuu_P6ActivityStatus": "Not Started",
            "uuu_activity_constraint_type": "As Soon As Possible",
            "uuu_duration_type": "Fixed Duration",
             "uuu_cmwbs_picker": "P-0115.WBSCODE1",
            "uuu_P6Duration": 2.0,
            "uuu_P6PlannedDuration":2.0,
            "uuu_P6WBSCode": "AV1",
            "bItemID": "01000~~01100",
```

```
            "CheckPullDown": "No",
             "uuu_P6ETCComputeType":"1/(BAC-EV)",
    }

    ]
}
```


Sample Success Response

A Sample Response from the API is listed below. The response returns the database ID of the Activities created newly in the activity table in addition to the activity data that is created or updated.


```
{
    "data": [
        {
            "uuu_P6Duration": 2.0,
            "id": 1482868,
            "uuu_P6EVCost": 0.0,
            "uuu_P6PlannedTotalCost": 0.0,
            "uuu_P6ActivityType": "Task Dependent",
            "uuu_P6ActivityId": "A1000",
            "CheckPullDown": "No",
            "uuu_P6WBSCode": "WBSCODE10",
            "uuu_P6RemainingTotalCost": 0.0,
            "bItemID": "01000~~01100",
            "uuu_P6ActivityStatus": "Not Started",
            "uuu_P6PlannedDuration": 2.0,
            "uuu_cmwbs_picker": "P-0115.WBSCODE10",
            "uuu_P6Finish": "2023-11-02T10:00:00",
            "uuu_P6WBSPath": "P-0115.WBSCODE10",
            "uuu_P6ActivityCalendar": "Project/Shell Calendar",
            "uuu_P6ActivityName": "act0123345",
            "uuu_P6ETCComputeType": "Remaining Cost for Activity",
            "uuu_P6AtCompletionDuration": 2.0,
            "uuu_P6ActualTotalCost": 0.0,
```

```
            "uuu_P6Start": "2023-11-02T08:00:00"
        },
        {
            "uuu_P6Duration": 2.0,
            "id": 1482869,
            "uuu_P6EVCost": 0.0,
            "uuu_P6PlannedTotalCost": 0.0,
            "uuu_P6ActivityType": "Task Dependent",
            "uuu_P6ActivityId": "A1010",
            "CheckPullDown": "No",
            "uuu_P6WBSCode": "WBSCODE1",
            "uuu_P6RemainingTotalCost": 0.0,
            "bItemID": "01000~~01100",
            "uuu_P6ActivityStatus": "Not Started",
            "uuu_P6PlannedDuration": 2.0,
            "uuu_cmwbs_picker": "P-0115.WBSCODE1",
            "uuu_P6Finish": "2023-11-02T10:00:00",
            "uuu_P6WBSPath": "P-0115.WBSCODE1",
            "uuu_P6ActivityName": "act0123345",
            "uuu_P6ETCComputeType": "Remaining Cost for Activity",
            "uuu_P6AtCompletionDuration": 2.0,
            "uuu_P6ActualTotalCost": 0.0,
            "uuu_P6Start": "2023-11-02T08:00:00"
        }
    ],
    "message": [
        "success"
    ],
    "status": 200,
    "rest_audit_id": 20581
}
```

Get Activities in the Manual Activity Sheet of a Specific Shell

Get/ws/rest/service/v2/activity/sheet/manualactivities?project_number={project number}&activity_sheet_name={manual activity sheet name}

Purpose

Retrieve a list of activities from the Manual Activity Sheet of a shell based on the `project_number` and activity sheet name mentioned in the query parameters.

Prerequisites

To get activities in Manual Activity Sheet, the Manual Activity Sheet should be present under the Activity Sheet sub-node.

To access the API, you should have "Get" permission Access in integration → Activity Sheet Services.

Notes:

- The API uses the fields added in the Integration form of the Activity Sheet (uDesigner) to retrieve the Manual Activity data from the activity sheet.
- All the request parameter related validations are applied.
- The Activity Sheet Name and Project Number are mandatory fields and validations are applied.
- There is no impact of directions present in the integration form of the Manual Activity Sheet.
- There is no sequence defined for the output response. The properties can be in any sequence.
- The Shell should not be Inactive or in an on-hold status to access the API.
- The Manual Activity Sheet should exist in the Shell to access the activities.

Request Parameters

Field Name	Data Type	Description
project_number	String	Valid 'Active' Unifier shell number (shell number into which the system is going to update project details). For example, "P-0001".
activity_sheet_name	String	The name of the activity sheet.

Validation Use-Cases and Error Codes

The following table lists the messages displayed in each use-case or scenario.

Use-Case	Status	Message
project_number provided as blank	12128	The API request contains empty value for: [project_number].
Missing the project_number property in url	12206	The API request is missing the required information: [project_number].
Invalid project_number or null	602	Project/Shell Number is not correct.
Inactive/On Hold project_number	12020	The API request contains an invalid value: [project_number]. Please check the status of this project_number in Unifier.
If activity sheet name is missing in url	12206	The API request is missing the required information: [activity_sheet_name`].
If activity sheet name is empty/null for activity sheet type "manual", throwing validation	12128	The API request contains empty value for: [activity_sheet_name].
Activity Sheet Name exceeded 50 characters.	12202	Invalid value was found in a field: [activity_sheet_name]. Allowed length: [50]
Activity Sheet Name doesn't exist.	12205	The API request contains an invalid value: [activity_sheet_name]. Please check if this activity_sheet_name has been configured in Unifier.

Responses

If the provided project number and activity sheet name are correct, then a success response is displayed.

Otherwise, if any of the validations is not satisfied, the response will display a message and data will return as empty.

Sample Success Response Output:


```
{
    "data": [
        {
            "uuu_P6ActivityType": "Task Dependent",
```

```
            "uuu_P6ActualFinish": null,
            "uuu_P6ActualStart": "2022-12-10T16:00:00",
            "uuu_P6RemainingEarlyStart": "2022-11-30T08:00:00",
            "uuu_P6ActivityId": "A22TestSheet",
            "uuu_P6ActualDuration": 0.0,
            "uuu_P6AtCompletionDuration": 0.0,
            "uuu_P6Finish": "2022-12-13T16:00:00",
            "uuu_P6PercentComplete": 100.0,
            "uuu_P6RemainingTotalCost": 0.0,
            "uuu_P6RemainingEarlyFinish": "2022-12-13T16:00:00",
            "uuu_P6ActivityStatus": "Not Started",
            "uuu_P6PlannedDuration": 0.0,
            "uuu_P6ActualTotalCost": 0.0,
            "uuu_P6PlannedFinish": null,
            "id": 1482795,
            "uuu_P6PlannedStart": null,
            "uuu_P6EVCost": 40.0,
            "uuu_P6ActivityName": "A22TestSheet",
            "uuu_P6PlannedTotalCost": 1.0,
            "uuu_P6Start": "2022-11-30T08:00:00",
            "uuu_P6RemainingDuration": 80.0
        }
    ],
    "message": [
        "success"
    ],
    "status": 200,
    "rest_audit_id": 18722
}
```


Sample Error Response Output


```
{
    "data": [],
```

```
    "message": [
        "The API request contains empty value for: [activity_sheet_name]."
    ],
    "status": 12128,
    "rest_audit_id": 18721
}
```

Codes Used in Web Services

The following topics describe the codes the codes that are used in Unifier web services.

In This Section

Currency 817
Time Zone 823
Date Format 828
User Type 829
Company Address 829
Status 830
Check Box 830

Currency

When importing Business Processes (BPs), you often must specify a project currency that the system can use for cost BPs and other calculations. You may need to enter the code corresponding to the currency used where the project is located. The currency can also be set in a user preference template.

The following tables list the supported currencies and their supporting codes.

Currencies and codes (A-G)

Currency Name	Code
Afghani	AFN
Algeria Dinar	DZD
Ariary	MGA
Australia Dollar	AUD
Azerbaijanian Manat	AZN
Bahamas Dollar	BSD
Bahrain Dinar	BHD
Barbados Dollar	BBD
BCEAO Franc	XOF
Belarus Ruble	BYR
Belize Dollar	BZD
Bermuda Dollar	BMD

Currency Name	Code
Bhutan Ngultrum	BTN
Bolivia Boliviano	BOB
Botswana Pula	BWP
Brazil Real	BRL
Burundi Franc	BIF
Canada Dollar	CAD
Cape Verde Escudo	CVE
Cayman Isl ds Dollar	KYD
CFA Franc BEAC	XAF
Chile Peso	CLP
Chile UF	CLF
China Yuan Renminbi	CNY
Colombia Peso	COP
Comoros Franc	KMF
Comptoirs Francais du Pacifique Franc	XPF
Congo-Kinshasa Franc	CDF
Convertible Marka	BAM
Costa Rica Colon	CRC
Croatia Kuna	HRK
Cuba Peso	CUP
Cyprus Pound	CYP
Czech Republic Koruna	CZK
Denmark Krone	DKK
Dirham	AED
Djibouti Franc	DJF
Dobra	STD
Dominican Republic Peso	DOP
Dram	AMD
East Caribbean Dollar	XCD
Egypt Pound	EGP
El Salvador Colon	SVC

Currency Name	Code
Eritrea Nakfa	ERN
Estonia Kroon	EEK
Ethiopia Birr	ETB
Euro	EUR
Falkland Islands Pound	FKP
Fiji Dollar	FJD
Gambia Dalasi	GMD
Georgia Lari	GEL
Ghana New Cedi	GHs
Gibraltar Pound	GIP
Guatemala Quetzal	GTQ
Guilder	AWG
Guinea Franc	GNF
Guyana Dollar	GYD

Currencies and codes (H-N)

Currency Name	Code
Haiti Gourde	HTG
Honduras Lempira	HNL
Hong Kong Dollar	HKD
Hungary Forint	HUF
Iceland Krona	ISK
Indian Rupee	INR
Indonesia Rupiah	IDR
Iran Rial	IRR
Iraq Dinar	IQD
Israel New Shekel	ILS
Jamaica Dollar	JMD
Jordan Dinar	JOD

Currency Name	Code
Kazakhstan Tenge	KZT
Kenya Shilling	KES
Kuwait Dinar	KWD
Kwanza	AOA
Laos Kip	LAK
Latvia Lat	LVL
Lebanon Pound	LBP
Lek	ALL
Lesotho Loti	LSL
Lev	BGN
Liberia Dollar	LRD
Libya Dinar	LYD
Lithuania Litas	LTL
Macau Pataca	MOP
Macedonia Denar	MKD
Malawi Kwacha	MWK
Malaysia Ringgit	MYR
Maldives Rufiyaa	MVR
Malta Lira	MTL
Mauritania Ouguiya	MRO
Mauritius Rupee	MUR
Mexico Peso	MXN
Mongolia Tughrik	MNT
Morocco Dirham	MAD
Myanmar Kyat	MMK
Namibia Dollar	NAD
Nepal Rupee	NPR
Netherlands Antilles Guilder	ANG
New Mozambique Metical	MZN
New Romania Leu	RON
New Turkish Lira	TRY

Currency Name	Code
New Zealand Dollar	NZD
Nicaragua Gold Cordoba	NIO
Nigeria Naira	NGN
North Korea Won	KPW
Norway Krone	NOK

Currencies and codes (O-T)

Currency Name	Code
OmanRial	OMR
Paanga	TOP
Pakistan Rupee	PKR
PanamaBalboa	PAB
Papua New Guinea Kina	PGK
Paraguay Guarani	PYG
Peru Nuevo Sol	PEN
Peso	ARS
Philippines Peso	PHP
Poland Zloty	PLN
Pound Sterling	GBP
Qatar Riyal	QAR
Riel	KHR
Russia Ruble	RUB
Rwanda Franc	RWF
Saint Helena Pound	SHP
Saudi Arabia Riyal	SAR
Serbian Dinar	RSD
Seychelles Rupee	SCR
Sierra Leone Leone	SLL
Singapore Dollar	SGD

Currency Name	Code
Slovakia Koruna	SKK
Slovenia Tolar	SIT
Solomon Islands Dollar	SBD
Som	KGS
Somalia Shilling	SOS
South Africa Rand	ZAR
South Korea Won	KRW
South Sudanese Pound	SSP
Sri Lanka Rupee	LKR
Sudanese Dinar	SDG
Suriname Dollar	SDG
Sweden Krona	SEK
Switzerland Franc	CHF
Syria Pound	SYP
Taiwan New Dollar	TWD
Taka	BDT
Tala	WST
Tanzania Shilling	TZS
Thailand Baht	THB
Transnistria Moldova Leu	MDL
Trinidad and Tobago Dollar	TTD
Tunisia Dinar	TND
Turkmenistan Manat	TMM
Tuvalu Dollar	TVD

Currencies and codes (U-Z)

Currency Name	Code
Uganda Shilling	UGX
Ukraine Hryvna	UAH

Currency Name	Code
United States Dollar	USD
Uruguay Peso	UYU
Uzbekistan Som	UZS
Vatu	VUV
Venezuela Bolivar Fuerte	VEF
Vietnam Dong	VND
Yemen Rial	YER
Yen	JPY
Zambia Kwacha	ZMK
Zimbabwe Dollar	ZWD

Time Zone

When importing user records, you must enter a starting time zone that the system can use for time stamps. You might want to enter the code corresponding to the company office where the user is located. Time zone is a user preference setting that the user can change later if necessary. The time zone can also be set in a user preference template.

About UTC

The Coordinated Universal Time (UTC) is a 24-hour time standard. The westernmost time zone uses UTC−12, being twelve hours behind UTC; the easternmost time zone, theoretically, uses UTC+12, being twelve hours ahead of UTC. Calculation of the UTC time standard is the same as with Greenwich Mean Time (GMT).

> **Note**: The local time in London is the same as UTC time.

The following table lists the UTC time standards used in the system.

Code	Time Standard/Zone	Information	Type
10	UTC+13:00	Samoa	Pacific/Apia
20	UTC-12:00	International Date Line West	Etc/GMT+12
21	UTC-10:00	Hawaii	Pacific/Honolulu
30	UTC-11:00	Coordinated Universal Time-11	Etc/GMT+11
40	UTC-09:00	Alaska	America/Anchorage

Code	Time Standard/Zone	Information	Type
41	UTC-07:00	Chihuahua, La Paz, Mazatlan	America/Chihuahua
50	UTC-08:00	Pacific Time (US and Canada)	America/Los_Angeles
51	UTC-08:00	Baja California	America/Santa_Isabel
70	UTC-07:00	Arizona	America/Phoenix
71	UTC-07:00	Mountain Time (US and Canada)	America/Denver
80	UTC-06:00	Central America	America/Guatemala
90	UTC-06:00	Central Time (US and Canada)	America/Chicago
91	UTC-06:00	Saskatchewan	America/Regina
92	UTC-06:00	Guadalajara, Mexico City, Monterrey	America/Mexico_City
110	UTC-05:00	Eastern Time (US and Canada)	America/New_York
111	UTC-05:00	Indiana (East)	America/Indianapolis
112	UTC-05:00	Bogota, Lima, Quito	America/Bogota
130	UTC-04:00	Atlantic Time (Canada)	America/Halifax
131	UTC-04:30	Caracas	America/Caracas
132	UTC-04:00	Asuncion	America/Asuncion
133	UTC-04:00	Cuiaba	America/Cuiaba
134	UTC-04:00	Georgetown, La Paz, Manaus, San Juan	America/La_Paz
135	UTC-04:00	Santiago	America/Santiago
140	UTC-03:30	Newfoundland	America/St_Johns
150	UTC-03:00	Brasilia	America/Sao_Paulo
151	UTC-03:00	Buenos Aires	America/Buenos_Aires
152	UTC-03:00	Cayenne, Fortaleza	America/Cayenne
153	UTC-03:00	Greenland	America/Godthab

Code	Time Standard/Zone	Information	Type
154	UTC-03:00	Montevideo	America/Montevideo
155	UTC-03:00	Salvador	America/Bahia
160	UTC-02:00	Coordinated Universal Time-02	Etc/GMT+2
170	UTC-01:00	Azores	Atlantic/Azores
171	UTC-01:00	Cape Verde Is.	Atlantic/Cape_Verde
180	UTC	Dublin, Edinburgh, Lisbon, London	Europe/London
181	UTC	Dublin	Europe/Dublin
182	UTC	Casablanca	Africa/Casablanca
183	UTC	Coordinated Universal Time	Etc/GMT
184	UTC	Monrovia, Reykjavik	Atlantic/Reykjavik
200	UTC+01:00	Amsterdam	Europe/Amsterdam
201	UTC+01:00	Brussels, Copenhagen, Madrid, Paris	Europe/Paris
202	UTC+01:00	Belgrade, Bratislava, Budapest, Ljubljana, Prague	Europe/Budapest
203	UTC+01:00	Amsterdam, Berlin, Bern, Rome, Stockholm, Vienna	Europe/Berlin
204	UTC+01:00	Sarajevo, Skopje, Warsaw, Zagreb	Europe/Warsaw
205	UTC+01:00	West Central Africa	Africa/Lagos
206	UTC+01:00	Windhoek	Africa/Windhoek
210	UTC+02:00	Athens, Bucharest	Europe/Bucharest
211	UTC+02:00	Cairo	Africa/Cairo
212	UTC+02:00	Beirut	Asia/Beirut
213	UTC+02:00	Jerusalem	Asia/Jerusalem
214	UTC+02:00	Helsinki, Kyiv, Riga, Sofia, Tallinn, Vilnius	Europe/Helsinki
215	UTC+02:00	Harare, Pretoria	Africa/Johannesburg

Code	Time Standard/Zone	Information	Type
220	UTC+02:00	Damascus	Asia/Damascus
221	UTC+02:00	Istanbul	Europe/Istanbul
222	UTC+02:00	Tripoli	Africa/Tripoli
223	UTC+03:00	Amman	Asia/Amman
224	UTC+03:00	Kaliningrad, Minsk	Europe/Kaliningrad
225	UTC+03:00	Kuwait, Riyadh	Asia/Riyadh
230	UTC+03:00	Nairobi	Africa/Nairobi
231	UTC+04:00	Moscow, St. Petersburg, Volgograd	Europe/Moscow
232	UTC+03:00	Baghdad	Asia/Baghdad
240	UTC+03:30	Tehran	Asia/Tehran
250	UTC+04:00	Abu Dhabi, Muscat	Asia/Dubai
251	UTC+04:00	Baku	Asia/Baku
252	UTC+04:00	Port Louis	Indian/Mauritius
253	UTC+04:00	Tbilisi	Asia/Tbilisi
254	UTC+04:00	Yerevan	Asia/Yerevan
260	UTC+04:30	Kabul	Asia/Kabul
261	UTC+05:00	Ashgabat, Tashkent	Asia/Tashkent
270	UTC+06:00	Yekaterinburg	Asia/Yekaterinburg
280	UTC+05:00	Islamabad, Karachi	Asia/Karachi
290	UTC+05:30	Chennai, Kolkata, Mumbai, New Delhi	Asia/Calcutta
300	UTC+06:00	Astana	Asia/Almaty
301	UTC+06:00	Dhaka	Asia/Dhaka
302	UTC+06:30	Yangon (Rangoon)	Asia/Rangoon
310	UTC+07:00	Bangkok, Hanoi, Jakarta	Asia/Bangkok
311	UTC+08:00	Krasnoyarsk	Asia/Krasnoyarsk
320	UTC+08:00	Perth	Australia/Perth
321	UTC+08:00	Beijing, Chongqing, Hong Kong, Urumqi	Asia/Shanghai

Code	Time Standard/Zone	Information	Type
322	UTC+08:00	Kuala Lumpur, Singapore	Asia/Singapore
323	UTC+08:00	Taipei	Asia/Taipei
324	UTC+09:00	Irkutsk	Asia/Irkutsk
340	UTC+09:00	Seoul	Asia/Seoul
341	UTC+09:00	Osaka, Sapporo, Tokyo	Asia/Tokyo
342	UTC+10:00	Yakutsk	Asia/Yakutsk
350	UTC+09:30	Darwin	Australia/Darwin
351	UTC+09:30	Adelaide	Australia/Adelaide
360	UTC+10:00	Brisbane	Australia/Brisbane
361	UTC+10:00	Canberra, Melbourne, Sydney	Australia/Sydney
362	UTC+10:00	Hobart	Australia/Hobart
363	UTC+11:00	Vladivostok	Asia/Vladivostok
364	UTC+10:00	Guam, Port Moresby	Pacific/Port_Moresby
380	UTC+07:00	Novosibirsk	Asia/Novosibirsk
390	UTC+08:00	Ulaanbaatar	Asia/Ulaanbaatar
391	UTC+11:00	Solomon Is., New Caledonia	Pacific/Guadalcanal
392	UTC+12:00	Magadan	Asia/Magadan
400	UTC+12:00	Coordinated Universal Time+12	Etc/GMT-12
410	UTC+12:00	Fiji	Pacific/Fiji
411	UTC+12:00	Auckland, Wellington	Antarctica/McMurdo
420	UTC+13:00	Nuku'alofa	Pacific/Tongatapu
430	UTC+05:30	Sri Jayawardenepura	Asia/Colombo
440	UTC+05:45	Kathmandu	Asia/Katmandu

Date Format

The date format is a user preference. You must enter a value for the user. The date format is a user preference setting that the user can change later if necessary. The date format can also be set in a user preference template.

The following lists the supported date formats:

Note: The time format for all dates is: `HH:MM AM`.

Date Format	Code
MM/DD/YYYY	0
DD/MM/YYYY	1
MM/DD/YY	2
DD/MM/YY	3
MM-DD-YYYY	4
DD-MM-YYYY	5
MM-DD-YY	6
DD-MM-YY	7
DD.MM.YYYY	8
YYYY-MM-DD	9
MMM/DD/YYYY	10
DD/MMM/YYYY	11
YYYY/MMM/DD	12
M/D/YYYY	13
M/D/YY	14
D/M/YYYY	15
D/M/YY	16
YY/M/D	17
YYYY/M/D	18

Date Format	Code
YY/MM/DD	19
YYYY/MM/DD	20

User Type

Use the values included in the following table for any record in which Standard or Portal are the User Type choices.

The User Type you choose, for the import value, will be used as soon as the record is imported.

For example, if you enter a “0” for the User Type, the user will be a Standard user upon successful import of the record; if you enter “1”, the user will be a Portal user.

User Type	Value
Standard	0
Portal	1

Company Address

Use the codes included in the following table for the address fields, when entering the user records.

Address Type	Code
Headquarters	1
Main	2
Branch Office	3
Billing	4
Shipping	5
Billing and Shipping	6
Satellite Office	7

Status

Use the values included in the following table for any record in which Active, Inactive, or On Hold are the status choices. The status you choose for the import value will be effective as soon as the record is imported. For example, if you enter a “1” for the status, the user will be an active user upon successful import of the record; if you enter “2”, the user will be On Hold until an administrator activates the user record.

Status	Value
Inactive	0
Active	1
On Hold	2

Check Box

For check boxes on BP forms, you can import the following values to select (“check”) a check box or leave it unchecked.

Check Box	Value
Check box not selected	0
Check box selected	1

Appendix A: Return Values

For all the following methods, the return object will be XMLObject.

> **Note**: XMLObject is described at the beginning of this document.

XMLObject contains 3 string elements:

- **String Status Code** (see table below)
- **String Array** - error log indicating reason of failure
- **String XMLContents** - a string contains XML values, if a return value is expected
- **XMLFileObject** - a file object that contains files as return value

The following is the list of String status codes and their descriptions:

String Status Code	Description
200	OK
300	Bad Data
302	Invalid Short name/AuthCode
303	Invalid Project Number
304	Invalid Business Process Name
405	Method Not Allowed
406	Invalid Server URL
500	Server Error, contact the system administrator
501	Not Implemented
503	Out of Resources
505	Invalid data
506	Invalid login
507	Error in creating directory for business process
601	Invalid Shortname/Authentication code
602	Project Number is not Correct

String Status Code	Description
603	Business Process Name is not correct
605	No Budget setup for the project
606	Budget is not correct.
608	XML is not valid
609	Project Template/Project Number is not correct
610	Only Cost and Line Item BPs are supported
611	Only Cost and Line Item BPs are supported
612	Project Template/Project name already exists
613	Project number already exists
614	ProjectXML should contain project number and project name tags.
615	Error processing XML.
616	XML is null or empty.
617	Found duplicate project numbers.
650	Create BP failed because …..
651	CBS Code is not Present
654	CBS Code is not in the correct format.
655	Could not create CBS Item.
656	Object Name is null or empty.
657	Invalid record_no.
658	field record_no is not present.
659	field record_no is empty.
660	field record_no is duplicate.
661	Integration settings for default workflow link id not set.

String Status Code	Description
662	Integration setting for default workflow or creator or BP not set. The Integration setting for default workflow, creator, or Business Process (BP) name has not been set. This error is sent for the Project number and the BP name that the user has sent in the web service call.
663	Status field value is not correct.
664	Create Project failed because
665	Data values for field tag
690	Only Lineitem non workflow BPs supported
691	Rule engine.
692	Cannot create multiple records for single record BP
693	Cannot create workflow process
694	Project Name can only contain the following characters: alphanumeric, spaces, and ()[],.;:-_&<>'
695	Project Number can only contain the following characters : alphanumeric and [.-_] characters are allowed
701	Invalid Column Name.
702	Column is not defined as manual entry.
703	Administrator is inactive. Cannot create column data.
704	Duplicate Column Name.
705	Update Column Data failed because:
706	Get Column Data failed because:
707	Cost sheet does not exist.
708	Unable to run report. Contact System Administrator.
709	Report name is not valid. Check if report exists or is enabled for Integration.
710	Cannot create Asset type BP record using createBPRecord interface.

String Status Code	Description
711	Invalid sheet name.
712	Import of Schedule activities failed reason :
713	Schedule sheet name is not valid.
714	Schedule sheet cannot be created; reason XML Import property is set to 'merge into existing schedule'.
715	Schedule sheet cannot be updated, reason XML Import property is set to 'overwrite existing schedule'.
716	The SOV of the selected contract is locked by another Business Process.
717	Selected contract does not have SOV. Check if the contract has reached terminal status.
718	Field name "+bp_picker_source_name +" is required.
719	pickervalue +" is invalid "+"value for "+source_name +"."
720	Reference BP not supported
721	Multiple records found for field "+source_name + " with value " + pickervalue+ "."
722	Invalid field name(s)
723	Spend Business Process not supported.
724	SOV is not created yet for the base commit associated with this Business Process.
725	You cannot change a Business Process picker name + <source_name> + , that has line item(s) associated with it.
726	Reference Commit picker value cannot be changed.
800	No Active multiple instance
803	Copy from shell template is not active

String Status Code	Description
804	(can be a combination of the following given below) can only contain the following characters: alphanumeric and [.-_] characters cannot contain any of the following characters: / \ : * ? " < > | Current shell cannot be a sub-shell of the selected shell Administrator is not a valid user
805	shell_name <shell name> already exists under <location>
806	shell_number <shell num> already exists
807	shell_name <shell name> already exists under <location>
808	shell_number <shell num> already exists
810	Integration Interface not found
811	Invalid Filter Condition
812	Copy from shell/template number is not correct
854	Amount exceeds remaining Reference Commit balance for one or more CBS codes
855	Reference commit value cannot be modified
867	Correct the syntax and resubmit the statement. The Data Type is not supported. Data Type should be one of the following: ▸ TIMESTAMP ▸ INTEGER ▸ FLOAT ▸ VARCHAR ▸ CLOB ▸ XML
869	Number of line items in the input file exceeds number of lines in the SOV