



SIEBEL UNIVERSAL QUEUING ADMINISTRATION GUIDE

VERSION 7.5

12-BD5L4X

JULY 2002

Siebel Systems, Inc., 2207 Bridgepointe Parkway, San Mateo, CA 94404
Copyright © 2002 Siebel Systems, Inc.
All rights reserved.
Printed in the United States of America

No part of this publication may be stored in a retrieval system, transmitted, or reproduced in any way, including but not limited to photocopy, photographic, magnetic, or other record, without the prior agreement and written permission of Siebel Systems, Inc.

The full text search capabilities of Siebel eBusiness Applications include technology used under license from Fulcrum Technologies, Inc. and are the copyright of Fulcrum Technologies, Inc. and/or its licensors.

Siebel, the Siebel logo, TrickleSync, TSQ, Universal Agent, and other Siebel product names referenced herein are trademarks of Siebel Systems, Inc., and may be registered in certain jurisdictions.

Other product names, designations, logos, and symbols may be trademarks or registered trademarks of their respective owners.

U.S. GOVERNMENT RESTRICTED RIGHTS. Programs, Ancillary Programs and Documentation, delivered subject to the Department of Defense Federal Acquisition Regulation Supplement, are “commercial computer software” as set forth in DFARS 227.7202, Commercial Computer Software and Commercial Computer Software Documentation, and as such, any use, duplication and disclosure of the Programs, Ancillary Programs and Documentation shall be subject to the restrictions contained in the applicable Siebel license agreement. All other use, duplication and disclosure of the Programs, Ancillary Programs and Documentation by the U.S. Government shall be subject to the applicable Siebel license agreement and the restrictions contained in subsection (c) of FAR 52.227-19, Commercial Computer Software - Restricted Rights (June 1987), or FAR 52.227-14, Rights in Data—General, including Alternate III (June 1987), as applicable. Contractor/licensor is Siebel Systems, Inc., 2207 Bridgepointe Parkway, San Mateo, CA 94404.

Proprietary Information

Siebel Systems, Inc. considers information included in this documentation and in Siebel eBusiness Applications Online Help to be Confidential Information. Your access to and use of this Confidential Information are subject to the terms and conditions of: (1) the applicable Siebel Systems software license agreement, which has been executed and with which you agree to comply; and (2) the proprietary and restricted rights notices included in this documentation.

Contents

Introduction

Revision History	8
----------------------------	---

Chapter 1. Overview of Siebel Universal Queuing

Communications Business Scenarios	10
Routing Voice Calls	11
Routing Email Requests	11
Routing Incoming Faxes	11
About Siebel Universal Queuing	12
Universal Queuing Architecture	13
Overall Architecture	13
Siebel Universal Queuing Elements	17
Work Items	17
Configurations	19
Channels and Channel Types	19
Employee Skills and Expertise	20
Simultaneous Sessions	21
Routes, Route Properties, and Escalations	21
Real-Time and Historical Statistics	22
Alarms and Errors	22
How Siebel Universal Queuing Works	23
Agent Login	23
Receiving Work Items	24
Routing Work Items	24
Escalations	24
Agent Availability and Sequential Assignment	25

Siebel Universal Queuing Implementations	26
Using Siebel Universal Queuing with Other Siebel Modules	27
Siebel Server Requirements for Siebel Universal Queuing	27
Siebel Universal Queuing and Siebel Communications Server	28
Siebel Universal Queuing and Siebel CTI	28
Siebel Universal Queuing and Siebel eMail Response	29
Siebel Universal Queuing Data Flow	30
Voice Call Data Flow	30
Email Data Flow	31

Chapter 2. Installing and Running Siebel Universal Queuing

Preparing to Install Siebel Universal Queuing	34
Server Configuration for the Routing Engine	34
Database Configuration for Recovery Table	37
Optimizing IBM AIX and IBM DB2 Universal Database	40
Installing Siebel Universal Queuing	41
Preinstallation Checklist	41
Installing the Routing Engine on Microsoft Windows	42
Installing the Routing Engine on UNIX	43
Creating the DUStore Recovery Table	45
Reconfiguring Siebel Universal Queuing After Installation	46
Running the Siebel Universal Queuing Routing Engine	47
Verifying and Running Routing Engine Processes on Microsoft Windows	47
Verifying and Running Routing Engine Processes on UNIX	49
Implementing Failure Recovery	51
Heartbeat Protocol	51
Siebel Universal Queuing Failure	52
Siebel Communications Server Failure	53
Configuring Siebel Universal Queuing	55
Views in the UQ Administration Screen	55
Defining Configurations	57

Defining Channels	65
Assigning Employee Skills	67
Defining Employee Channel Capacity	69
Defining Communications Configurations	71
Configuring Sequential Assignment	73
Using the Wrap Enabled Parameter	73
Using Sequential Assignment as Defined in File callrouteA.def	74
Event and Command Definitions for Sequential Assignment	75
Configuring Session Timeout for EAI Object Manager	79

Chapter 3. Using Siebel Universal Queuing

Creating Routes and Escalations	82
Notifying Siebel Universal Queuing of Updates	83
Defining Routes, Route Properties, and Escalation Rules	84
Adding Route Properties	86
Defining a Route Escalation	91
Creating Route Escalation Rules	92
Creating Skill Definitions	94
Editing a Route Definition in Real-Time	96
Inactivating a Route Definition	96
Receiving and Handling Work Items	97
Transferring Work Items to Another Route	98
Selecting Work Items from My Qualified Work Items View	99
Routing Service Requests or Activities	100
Abandoning a Phantom Work Item	102
Resetting the Siebel Universal Queuing Connection	102
Resetting the Siebel Universal Queuing Agent Session	103
Viewing Alarms and Errors	104

Chapter 4. Siebel Universal Queuing Reporting

Viewing Real-Time Status Data	106
Setting the Refresh Interval	106
Viewing Channel Status Data	106
Viewing Employee Status Data	107
Viewing Route Status Data	109
Viewing Historical Data	110
Viewing Historical Channel Statistics	111
Viewing Historical Route Statistics	111
Business Objects and Business Components	113
Siebel Universal Queuing Business Objects	113
Siebel Universal Queuing Business Components	114

Chapter 5. Interfacing with Siebel Universal Queuing

Business Service Methods	124
AddWorkItem	124
CompleteWorkItem	126
RequestAgentState	127
RequestWorkItemState	128
Return Codes for Business Service Methods	129

Chapter 6. Troubleshooting Siebel Universal Queuing

Installation Issues	132
Network Issues	133
Application Issues	135

Index

Introduction

This guide describes how to install and configure Siebel Universal Queuing for use with your Siebel applications.

This book will be useful primarily to people whose title or job description matches one of the following:

Call Center Administrators	Persons responsible for setting up and maintaining a call center. Duties include designing and managing Computer Telephony Integration (CTI), SmartScripts, and message broadcasts.
Communications Developers	Persons who may integrate a third party universal queuing engine for use with Siebel applications using the Siebel Universal Queuing application programming interface.
Database Administrators	Persons who administer the database system, including data loading; system monitoring, backup, and recovery; space allocation and sizing; and user account management.
Siebel Application Administrators	Persons responsible for planning, setting up, and maintaining Siebel applications.
Siebel Application Developers	Persons who plan, implement, and configure Siebel applications, possibly adding new functionality.
Siebel System Administrators	Persons responsible for the whole system, including installing, maintaining, and upgrading Siebel applications.

The book is organized to present information in a sequence corresponding to the order in which you are likely to install and configure Siebel Universal Queuing. The book contains:

- Overview information, including an introduction to the terminology and elements used by Siebel Universal Queuing
- Installation instructions, including failover and troubleshooting information

- Configuration instructions for setting up the Siebel Universal Queuing routing engine

NOTE: End users are not expected to use this book, although some information presented here may be useful to them.

- Configuration information to set up routes, route properties, escalations, and employee sessions
- End user information about requesting and transferring work items and viewing statistics
- Information about business service methods for interfacing with the routing engine

Revision History

Siebel Universal Queuing Administration Guide, Version 7.5

Overview of Siebel Universal Queuing

1

This chapter provides an overview of Siebel Universal Queuing, including the following:

- An overview of Siebel Universal Queuing and some communications business scenarios
- A description of the Siebel Universal Queuing architecture and its elements
- A description of how Siebel Universal Queuing works with Siebel Server and the Siebel EAI Object Manager and Siebel Communications Server components

Communications Business Scenarios

In today's emerging technological and information world, companies are moving towards managing and interacting with their customers through a wide variety of communications channels, such as voice, email, and fax requests.

With so many communication channels, companies are faced with managing each customer interaction while meeting service levels and maximizing customer satisfaction. In addition, customers are faced with optimally staffing and training their workforce to deal with these communication channels whether through their call center, telebusiness organizations, or their sales, marketing, and service professionals.

Currently, many customers have dedicated email and fax addresses defined for specific business areas, as well as automated call distributors. Employees are assigned to poll and manage the inquiries for each communication channel. Combined with the traditional call queues for inbound voice calls, agents are tasked with managing many of these communication channels, yet they may not have any visibility to the queue status and priorities of each channel.

A universal queuing strategy can maximize productivity and customer satisfaction through every communications channel by assigning, routing, and queuing work items from many channels across a common group of blended agents. This reduces response times and customer hold times, while balancing priorities among multiple communication channels. Customers receive the best possible attention in the least amount of time.

The communications toolbar in the Siebel application allows agents to receive and manage work items from any of these channels. Siebel Universal Queuing, a licensed module that is new for Siebel 7, interacts with different Siebel Server components, such as Siebel Communications Server, to manage the many types of communication channels with the customer and proactively present them to the employee in a timely and structured manner.

In the following scenarios, Siebel Universal Queuing examines the type of the request, determines the correct handling of the request based on communication channel type and routing rules, and forwards the request to the appropriate call center agent for handling.

Routing Voice Calls

A customer sees an ad for a product and dials the toll-free number associated with the ad. The customer call is routed into a call queue. The call is forwarded to Siebel Universal Queuing for routing to the most qualified available agent. Siebel Universal Queuing uses the toll-free number or other selection made by the customer to determine the routing rule to use.

Routing Email Requests

A customer is looking at the Web site of the company and decides to email a question about a service to a particular mailto link on the Web site. The customer's email program is opened and a new email message appears already addressed to the company. The customer types in the question and clicks the send button.

The company's email server receives the email and forwards it to Siebel Universal Queuing for routing to the most qualified agent for further processing. An agent uses Siebel eMail Response features to read and reply to the email message.

Routing Incoming Faxes

A customer receives a renewal flyer for their subscription of a service offered by the company. The customer completes the flyer and faxes it back to the company for processing. The company's fax server receives the fax and forwards it to Siebel Universal Queuing for routing through the appropriate Siebel communications infrastructure components to the most qualified agent for further processing.

About Siebel Universal Queuing

Siebel Universal Queuing is a business solution that assists you in routing the communications customers use to interact with your company. Typical communications channels are voice calls or email.

Siebel Universal Queuing routes incoming communications to the most appropriately skilled call center agent. Siebel Universal Queuing also determines agent availability, which is key to routing communications so they will be handled in a timely manner.

To determine the best available agent, Siebel Universal Queuing applies routing rules that you define. To define such a rule, you determine:

- The communications channel to which a rule applies (voice, email, fax, and so on)
- The specific properties for each communication that will be matched to the routing rule
- The skills (language, product area, and so on) that an agent must possess to appropriately handle communications routed by this rule
- The skill competency level required for this routing rule
- The escalation times for each route

Because Siebel Universal Queuing is solely a routing engine, it can route (or find an agent for) any work item that contains work item characteristics that can be matched to routing rules.

The communications toolbar in the Siebel application allows agents to manage communications received from the configured communications channels. Communications are routed to an agent based on selection performed by Siebel Universal Queuing.

Managers can monitor work load response times and agent availability, and modify routing rules in real time.

Universal Queuing Architecture

This section describes the overall relationship between the Siebel Universal Queuing routing engine and Siebel eBusiness Applications. It also describes the interface between the routing engine and the applications.

Overall Architecture

Siebel Universal Queuing includes the following components:

- The Siebel Universal Queuing routing engine, which is installed separately from Siebel Server and runs either on the same machine as Siebel Server or on a separate machine. For performance reasons, it is recommended that you install the Siebel Universal Queuing routing engine on a separate machine by itself.
- Siebel Universal Queuing business service methods, which handle communications with Siebel Communications Server and other Siebel modules.
- The Siebel Universal Queuing application programming interface (API), which provides the mechanism for routing engine functionality to interface with Siebel eBusiness Applications. The Siebel Universal Queuing API is application-independent, allowing customers to integrate a third-party routing engine with Siebel eBusiness Applications, if desired, and to configure channels, route, and other elements in the manner described in this book.

You can request additional information about the Siebel Universal Queuing API from Siebel SupportWeb (<http://ebusiness.siebel.com/supportweb/>).

- The UQ Administration screen included with Siebel eBusiness Applications, which allows administrators to configure and administer the routing engine.

Siebel Universal Queuing works with a number of Siebel modules or products, such as Siebel Communications Server, Siebel CTI, and Siebel eMail Response. These modules work together to make the routing process work.

The communication protocol between Siebel Server and the Siebel Universal Queuing routing engine is HTTP. Because the communication protocol is HTTP, the routing engine may be run on a separate platform from Siebel Server.

Communications with the Siebel Universal Queuing routing engine are through the Siebel Universal Queuing API. The API will package the internal Siebel Universal Queuing request data into Simple Object Access Protocol (SOAP) format with embedded XML. The data is embedded into the body of an HTTP packet and the packet is sent directly to the routing engine through HTTP.

Each Siebel Universal Queuing client, such as Siebel Communications Server establishes a connection to the routing engine through the Universal Queuing API. Voice calls and email requests are sent through the Communications Inbound Manager.

When requests are sent through the Universal Queuing API, the request data will be converted into XML. Siebel Universal Queuing business service will add a SOAP envelope on top of the XML. Once the XML document is ready, it is sent to the Siebel Universal Queuing routing engine using the client's established connection.

Upon receiving the request, the Siebel Universal Queuing routing engine always responds synchronously about whether the request has been processed or not. Depending upon the request, the routing engine will also send back an asynchronous response to the Siebel Web server. The Siebel Web server will route this request to the Siebel EAI Object Manager. The EAI Object Manager then invokes the Siebel Universal Queuing business service, based upon the EAI external services configuration. When EAI Object Manager receives the request in HTTP format, it extracts the data from the body and converts it to a Siebel internal format.

The Siebel Universal Queuing routing engine sends requests back to Siebel Server using a number of established connections to Siebel Web server. The information about how to establish a connection to the Web server is provided to the routing engine during the initial OpenConnection request. In this request, Siebel Server tells the Siebel Universal Queuing routing engine the URL that needs to be sent to the Siebel Web server in order to establish the connection.

Because each connection to EAI Object Manager through the Web server is only served by one thread, it is important to establish the optimum number of connections so that maximum performance is achieved. The number of connections is set using the MaxConnections parameter when defining the Siebel Universal Queuing configuration. For more information about this parameter, see [Table 7 on page 58](#).

Figure 1 illustrates the general architecture of a communications system using Siebel Universal Queuing. Refer to *Siebel Communications Server Administration Guide* for more information on the Siebel Communications Server architecture.

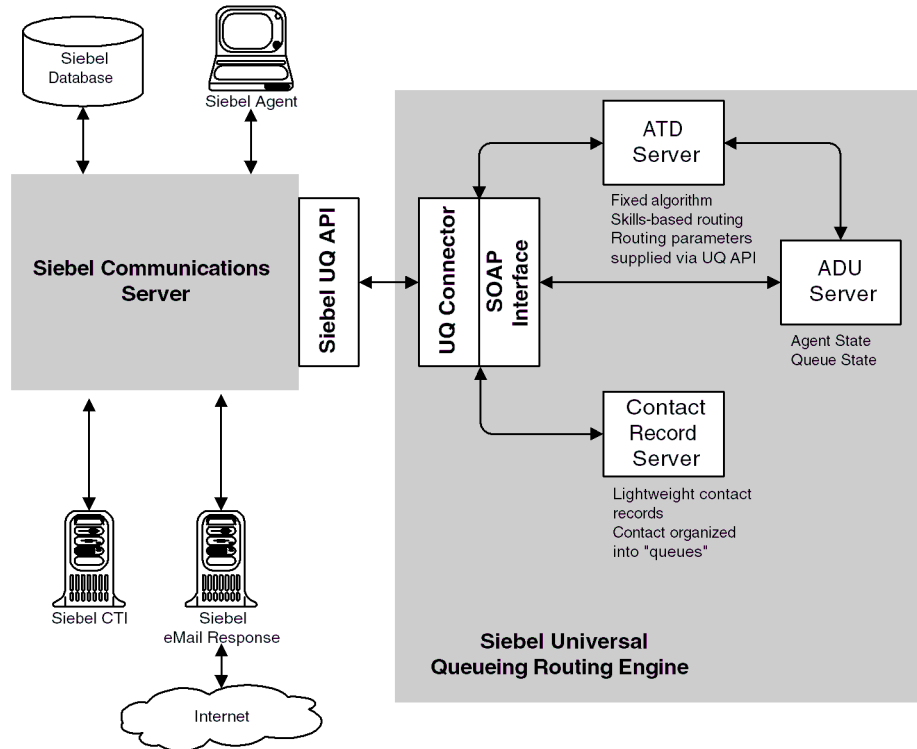


Figure 1. Siebel Universal Queuing Architecture

The Siebel Universal Queuing routing engine comprises the following major components:

- **UQ Connector.** Provides the gateway between Siebel Server and the Siebel Universal Queuing routing engine, using the HTTP protocol.
- **SOAP interface adapter.** Bridges the gap between the UQ Connector and the SOAP interface, and manages the details of the SOAP protocol.

- **ADU Server.** Stores agent state, including the channel state for each channel type for which the agent can receive work items. The Agent Data Unit (ADU) is created for each agent upon login and remains until the agent logs out.
- **Contact Record Server.** Stores work item state from the time a work item is first introduced into the Siebel Universal Queuing routing engine until the last agent completes work on the work item. Support services are called as needed. For example, the Data Unit (DU) Store Server provides a persistent copy in the database (DUStore table) of items stored in the ADU and Contact Record servers; the Directory server supplies configuration information to the servers.
- **ATD Server.** Contains the logic for managing work item state, agent state, and work item routing based on work item data properties and agent skills. To match a work item and an agent, the Automatic Task Distributor (ATD) Server performs these basic operations:
 - Assigns an available agent to a new work item when it arrives, and queues the work item if no agent is available.
 - Finds a work item for an available agent, and leaves the agent available if no work item is found.
 - Looks for work items that expire in each escalation step and moves them to the next escalation step. Then tries to assign an available agent, queuing the work item if no agent is available.

Siebel Universal Queuing Elements

This section gives an overview of the elements that you need to understand before you begin to configure and use Siebel Universal Queuing:

- Work items
- Configurations
- Channels and channel types
- Employee skill definitions and expertise
- Simultaneous sessions
- Routes, route properties, and escalations
- Real-time and historical statistics
- Alarms and errors

Work Items

Siebel Universal Queuing queues and routes *work items*. A work item represents a real-time or a nonreal-time workflow task. A real-time work item, such as a voice call, has an associated live session. A nonreal-time work item is a passive request for an action, such as an email asking for more information, a fax requesting a magazine subscription, or a service request that needs to be addressed. Email, service requests, activities, or other items may be defined either as real-time or as nonreal-time work items.

Each work item has a set of associated properties. For example, an email work item has an email message ID, sender's email address, receiver's email address, subject, and so on.

A work item is delivered to the Siebel Universal Queuing routing engine through the Siebel communications infrastructure. The Siebel Universal Queuing routing engine uses the work item's data properties to find a matching route. After the work item is matched to a route, the routing engine uses the skill requirement in each of the matching route's escalations steps to locate a qualified agent. When the routing engine finds a suitable, available agent to handle the work item, the work item is passed back to Siebel Communications Server to be handled by the agent.

Work Item Delivery Models

An agent has the capability of handling more than one concurrent work item for a given channel. The Siebel Universal Queuing administrator determines how many simultaneous sessions each agent can handle for each channel.

An agent can receive work items in one of the following ways:

- Siebel Universal Queuing working with Siebel Communications Server assigns and *pushes* real-time work items to an agent as soon as the agent becomes available to receive a new work item.

The agent must be logged on and in a ready state to receive a new real-time work item. The Accept Work Item button on the communications toolbar blinks when the work item is received and the agent must explicitly accept the work item. The work item is returned to the queue and rerouted if not accepted by the agent within a specified period of time, and the agent state is changed to not ready.

- The agent can select a work item from a list of available work items for which the agent is qualified. The work items are managed by Siebel Universal Queuing. This model is also known as *cherry picking*.

The agent must be logged on and in a ready state to select a work item from the list. For more information, see [“Selecting Work Items from My Qualified Work Items View” on page 99](#).

- Siebel Universal Queuing, working with Siebel Communications Server, assigns nonreal-time work items to an agent, regardless of the agent’s ready or not ready state.

The agent must be logged on to receive a new nonreal-time work item. The agent also must periodically check the appropriate view, such as the My Service Requests view of the Service screen or the My Communications view of the Communications screen, to determine if new nonreal-time work items have been received. The buttons on the communications toolbar do not blink for new, nonreal-time work items.

Configurations

The Siebel Universal Queuing configuration parameters, described in [Table 7 on page 58](#), specify settings that tell Siebel Server how to connect to the Siebel Universal Queuing routing engine.

You must define at least one Siebel Universal Queuing configuration and make this the *primary configuration*. You can define multiple configurations, but only one configuration can be set as primary. The primary configuration is used by default when an attempt is made to connect to the routing engine and no Siebel Universal Queuing configuration is specified in the agent's communications configuration, or the agent is not defined in any communications configuration.

When call center agents are configured in Siebel Communications Server, they are assigned to a communications configuration. When creating a communications configuration in the Communications Administration screen, you can specify a particular Siebel Universal Queuing configuration for your agents to use, by using the `UQConfigurationName` parameter.

For more information on Siebel Universal Queuing configurations, see [“Defining Configurations” on page 57](#). For information on communications configurations, see [“Defining Communications Configurations” on page 71](#), and refer to *Siebel Communications Server Administration Guide*.

Channels and Channel Types

A channel defines the communication media for a work item that is routed through Siebel Universal Queuing. A channel is typically based on one of the following channel types:

- Voice
- Email
- Service request
- Activity

The channel is one of the characteristics that defines a work item. The channels that will be available to your implementation of Siebel Universal Queuing are defined by your communications administrator. The channel can be anything as long as it can be passed to the routing engine along with the work item. For example, you can specify multiple channels based on the email channel type: Email-support, Email-service, Email-sales, and so on, according to your organization's needs.

Each channel also has channel properties, which are a superset of the values that the work items for the channel may contain. For example, an email channel might have a SenderAddress property. A subset of these properties is used to create the routing rules that will be matched to work item properties.

NOTE: Service requests and activities are nonreal-time work items. Email messages may be configured as either realtime or nonreal-time work items. Routing nonreal-time work items refers to assigning ownership for such items. Agents are not notified directly, as they are with realtime work items that are sent to the agent's Siebel desktop through the communications toolbar.

For more information on channels and channel types, see [“Defining Channels” on page 65](#).

Employee Skills and Expertise

Employees are the individuals to whom Siebel Universal Queuing will route work items. Employees are defined for your organization using the User Administration screen. Specific call center employees are further defined as agents through Siebel Communications Server, where communications drivers are assigned to the agents.

For more information on defining agents, refer to *Siebel Communications Server Administration Guide*. For more information on defining employees, refer to *Applications Administration Guide*.

Since Siebel Universal Queuing uses a skill-based routing algorithm, each employee that will use Siebel Universal Queuing must have skills and expertise levels assigned. Siebel Universal Queuing then matches employee skills and expertise to work item data properties to route the work item.

For more information on employee skills and expertise, see [“Assigning Employee Skills” on page 67](#).

Simultaneous Sessions

Simultaneous sessions are the number of work items for a channel that an employee can work on simultaneously. An employee must have at least one simultaneous session defined for a channel type in order for Siebel Universal Queuing to consider that employee when routing work items for that channel. For some channel types, such as email, an employee may be able to handle multiple work items at one time and would be assigned more than one simultaneous session for this channel type.

NOTE: When sequential assignment is used, then you must set the simultaneous sessions specified for each applicable channel, for each agent, as described in [“Configuring Sequential Assignment” on page 73](#).

For more information on defining simultaneous sessions, see [“Defining Employee Channel Capacity” on page 69](#).

Routes, Route Properties, and Escalations

Work items are handled by Siebel Universal Queuing according to business logic expressed as routes. A route has these components:

- Route record
- Route properties (selection criteria)
- Escalation steps

Selection criteria consist of simple to complex statements that Siebel Universal Queuing evaluates based on the properties of a work item. If the work item characteristics match the selection criteria, the work item is routed based on the escalation steps. For more information, see [“Defining Routes, Route Properties, and Escalation Rules” on page 84](#).

Escalation steps determine how a work item will be routed based on a set of skill definitions and wait times. Skill definitions are used to match a work item with an employee who holds the same skill criteria defined for handling the work item. The wait time determines how long a work item waits for an available employee in this escalation step before moving to the next escalation step. Each escalation step should generally become more liberal by including a larger pool of employees that can handle the work item.

Real-Time and Historical Statistics

You can view statistics on the performance of employees, channels, and routes for specific time intervals. This is useful in helping you determine the most efficient deployment of your call center resources.

For more information on real-time statistics, see [“Viewing Real-Time Status Data” on page 106](#).

Siebel Universal Queuing maintains activity journals for work items and employees. From these journals you can view historical data on routes and channels for a time period that you specify.

For more information on historical statistics, see [“Viewing Historical Data” on page 110](#).

Alarms and Errors

Siebel Universal Queuing generates alarms and errors and logs them to the database. Alarms and error messages can be viewed using the UQ Administration screen.

Alarms are classified using the following designations and criteria:

- **Informational.** Events requiring no action or intervention, such as reporting initialization progress.
- **Warning.** Events that require action, but not necessarily immediate action. There is no immediate degradation in system capabilities or performance. Examples include memory utilization hitting a predetermined threshold, or number of users approaching the system limits.
- **Critical.** Immediate action is required, and the system capability is degraded. An example is a missing required parameter on an API method, or inability to continue to write log information.
- **Emergency.** Immediate action is required, and the system may fail to perform in a useful manner. An example is the inability to connect to the database.

For more information on viewing alarms and errors, see [“Viewing Alarms and Errors” on page 104](#).

How Siebel Universal Queuing Works

This section describes how Siebel Universal Queuing receives and routes incoming work items.

Agent Login

Call center agents are configured to use Siebel Universal Queuing by assigning the agent to a communications configuration that includes Siebel Universal Queuing. The agent is logged into the routing engine using the Siebel Universal Queuing configuration specified in the communications configuration. If no configuration name is specified, the agent is logged in using the Siebel Universal Queuing primary configuration.

For more information on agent configuration and logon, refer to *Siebel Communications Server Administration Guide*.

The first time an agent attempts to log into Siebel Universal Queuing after installation or system restart, Siebel Server sends a request establishing a connection to the routing engine. The connection is established using the Siebel Universal Queuing configuration specified in that agent's communication profile or the primary configuration, if none is specified.

Next, Siebel Server asks Siebel Universal Queuing if routing rules and skill definitions are loaded into memory. If not, the routing rules and skills are loaded from the Siebel database. Siebel Universal Queuing also supports reloading routing rules and skill definitions while agents are logged in by using the Notify UQ button in the Routes and Employees views in the UQ Administration screen. Notify UQ reloads all routing rules and skills, not just those that have been changed.

Once the connection is established with Siebel Server and the rules have been loaded, the agent is logged into Siebel Universal Queuing. Siebel Universal Queuing sends a request to Communications Server to place the agent in ready mode (or not ready, depending on the configuration). The agent is now ready to accept work items for the channel type specified in simultaneous sessions for that agent.

For more information about using the Notify UQ button, see [“Notifying Siebel Universal Queuing of Updates” on page 83](#).

Receiving Work Items

Examples of work items destined for routing by Siebel Universal Queuing are received as follows:

- **Voice calls and email.** These work items are received by the Communication Inbound Manager in Siebel Communications Server. The voice calls and email messages are then packaged and sent to the Siebel Universal Queuing routing engine through the Siebel Universal Queuing API.

Routing Work Items

The Siebel Universal Queuing routing engine receives each work item and uses a skills-based routing algorithm to match the work item properties with one of its routing rules.

For example, a work item received with a channel property of email and a language property of U.S. English (ENU) would match a routing rule with the same properties. When the work item matches a route, the next step is to find an appropriate agent to handle the work item. This happens by matching the skill criteria defined in the escalation step.

Once an agent is found, the routing engine routes the work item in this example back through Siebel Communications Server to the next available qualified agent. Work items can be routed to an available agent if, for this agent, simultaneous sessions is set to at least one for the channel type email and the language skill of ENU is defined. If more than one agent matches the routing rule, the work item is routed to the agent who was least recently assigned a work item.

Escalations

Each route includes escalation steps which define the skill requirements for an agent to handle the work item. One or more escalation steps can be defined to widen the choice of qualified agents when no agent is available that matches the ideal set of skill requirements for the work item.

When a work item is matched to a route but no qualified agents are currently available to accept the work item, the work item waits in the first escalation step for the next available agent. Each escalation step includes a time limit that a work item can remain queued. When the elapsed time that a work item has been in the step reaches the time limit, the work item is moved to the next escalation step for the route. If a work item remains in the last escalation step beyond its time limit, an alarm is generated and logged.

NOTE: Escalation steps consider agent availability only for real-time work items.

Agent Availability and Sequential Assignment

Siebel Universal Queuing manages the agent availability state for the agents logged into the routing engine so that work items can be assigned to agents that are available. As an agent's availability is changed by the routing engine, the new state is sent back to Siebel Communications Server and the communications toolbar is updated to reflect the new state.

Siebel Universal Queuing supports two alternative approaches to implementing *sequential assignment*, which is a way of configuring Siebel Universal Queuing that limits an agent to handling one inbound work item at a time. The work items—across channels—are assigned sequentially. The two approaches, which are not mutually exclusive, are:

- Using the Wrap Enabled configuration parameter
- Using sequential assignment as defined in the file `callrouteA.def`

The two sequential assignment options are ways of simplifying work-item handling for agents. Use `Wrap Enabled = TRUE` when agents need time to do wrap-up work after releasing a work item.

If you choose not to use either approach, then multiple work items may be assigned to an agent at once, subject to each channel's maximum number of simultaneous sessions.

For more information about these two methods, see [“Configuring Sequential Assignment” on page 73](#).

Siebel Universal Queuing Implementations

Customers can implement one of the following two general communications configurations to use Automatic Call Distribution (ACD) with Siebel Universal Queuing:

- Use Siebel Universal Queuing as the exclusive multichannel queuing module. The Siebel Adaptive Communications application programming interface (API) will support the route requests. Any custom Siebel communications driver based on this API, such as for Siebel CTI (Computer Telephony Integration), must implement this functionality, and be able to send route requests to Siebel Universal Queuing for agent assignment.

For information about the Siebel Adaptive Communications API and creating communications drivers, refer to *Siebel Communications Server Administration Guide*.

- Use ACD for voice calls and Siebel Universal Queuing for all other communication channels. This can be accomplished by creating two communications configurations: one for voice with ACD and one for other channels using Siebel Universal Queuing. Agents can be assigned to one or the other of these configurations, so they will not receive work items from both systems.

For information about creating communications configurations, refer to *Siebel Communications Server Administration Guide*.

Using Siebel Universal Queuing with Other Siebel Modules

This section provides high-level information about how Siebel Universal Queuing works with closely related product modules. Several Siebel modules use Siebel Universal Queuing to route incoming communications work items to the most appropriate call center agent.

Siebel Server Requirements for Siebel Universal Queuing

In order to use Siebel Universal Queuing, you must have the following Siebel Server components enabled and running:

- **Communications Session Manager (CommSessionMgr).** Supports multichannel user-interactive sessions for agents using the communications toolbar for voice, email, or other types of work items. This Siebel Communications Server component belongs to the Communications Management component group. For more information, see [“Siebel Universal Queuing and Siebel Communications Server” on page 28](#).
- **Communications Inbound Manager (CommInboundMgr).** Processes inbound work items, including voice or email work items that are to be routed using Siebel Universal Queuing. This Siebel Communications Server component belongs to the Communications Management component group. For more information, see [“Siebel Universal Queuing and Siebel Communications Server” on page 28](#).
- **EAI Object Manager.** This server component, part of the Siebel eBusiness Application Integration technology suite, provides the mechanism by which the Siebel Universal Queuing routing engine communicates with the Siebel application, over HTTP. For more information, refer to *Overview: Siebel eBusiness Application Integration Volume I* and related documentation.

For more information about configuring connections from the Siebel Universal Queuing routing engine to these server components, see [“Configuring Siebel Universal Queuing” on page 55](#).

Siebel Universal Queuing and Siebel Communications Server

Siebel Universal Queuing works in conjunction with Siebel Communications Server to route incoming work items to appropriately skilled agents who have logged into Siebel Universal Queuing.

Agents log in from the communications toolbar or from a menu command. An agent becomes aware of a routed work item through a blinking Accept Work Item button on the communications toolbar. An agent uses other buttons on the communications toolbar to alert Siebel Universal Queuing of the agent's ready state, so that Siebel Universal Queuing can route communications appropriately.

For a detailed data flow description for voice and email work items, see [“Siebel Universal Queuing Data Flow” on page 30](#). For more information about Siebel Communications Server, including server components in the Communications Management component group, refer to *Siebel Communications Server Administration Guide*.

Siebel Universal Queuing and Siebel CTI

Siebel CTI (Computer Telephony Integration) provides voice-channel support for call center agents using Siebel eBusiness Applications. Siebel CTI is included with Siebel Call Center. For other base applications, it is an optional module. CTI capabilities are provided through integration with third-party CTI middleware packages such as Dialogic CT Connect (included in Siebel CTI Connect).

Call routing may be handled by Siebel Universal Queuing and agents are notified of incoming calls through the communications toolbar.

For a detailed data flow description, see [“Voice Call Data Flow” on page 30](#). For more information about Siebel CTI, refer to *Siebel Communications Server Administration Guide*.

Siebel Universal Queuing and Siebel eMail Response

Siebel eMail Response, available as an optional module, allows agents to receive and reply to inbound email messages.

Siebel eMail Response may use Siebel Universal Queuing to route incoming email messages to call center agents. An agent must be identified in the UQ Administration screen as able to accept email messages and must be logged in before Universal Queuing can route an incoming email message to the agent.

For a detailed data flow description, see [“Email Data Flow” on page 31](#). For more information about Siebel eMail Response, refer to *Siebel eMail Response Administration Guide*.

Siebel Universal Queuing Data Flow

This section describes how work items enter and are routed through Siebel Universal Queuing.

Voice Call Data Flow

The following scenario describes the data flow for a voice call work item.

- 1** A customer makes a call to a call center. The number the customer dialed (DNIS) is mapped to a route point on the telephone switch.
- 2** The CTI middleware generates a route request. This request is then sent to the Siebel CTI driver.
- 3** The Siebel CTI driver sends the event to the Communications Inbound Manager.
- 4** Communications Inbound Manager receives the event and then executes the voice routing workflow to package the call data.
- 5** Communications Inbound Manager then invokes the Universal Queuing business service in one of the workflow steps in order to send the call request to the Siebel Universal Queuing routing engine.
- 6** The routing engine receives this call route request and tries to find a matching routing rule based upon the data properties in the call work item.
- 7** Once a routing rule is found, the routing engine looks at the first escalation step to determine which kind of skill for the agent is required.

If no agent is found in the first escalation step, the work item remains in this escalation step for a specified amount of time. When the time expires and no agent is available, the work item moves to the next escalation step and a new set of skill requirements.

- 8** Once an agent is found, the routing engine sends the call data together with the agent ID as a request to the Siebel EAI Object Manager.
- 9** The EAI Object Manager receives the request and then invokes the Siebel Universal Queuing business service to process the request.

- 10** The Siebel Universal Queuing business service receives the request and determines that this request needs to be passed back to Communication Inbound Manager.

The determination is based upon the SiebelLoginID and ClientKey that are included in the work item properties. These two pieces of information are placed in the work item by the Communications Inbound Manager before it sends the work item to the routing engine.

- 11** Communications Inbound Manager determines the telephone extension for the assigned agent.
- 12** The Communications Inbound Manager issues, through the CTI driver, a route request to reroute the call to the extension for the agent.
- 13** The CTI driver issues the route request to the CTI middleware, which in turn sends the request to the switch.
- 14** The phone on the agent's desktop rings and the Accept Work Item button on the communications toolbar blinks.

Email Data Flow

The following scenario describes the data flow for an email work item.

- 1** A customer sends an email to a service center.
- 2** The Communications Inbound Manager is monitoring a specific email account on the email server.
- 3** Once the email message is received in the monitored email account, the email driver picks up the email.
- 4** Communications Inbound Manager executes an email workflow to process the email. One of the steps in the workflow is to package the data as a work item.
- 5** Communications Inbound Manager then invokes the Siebel Universal Queuing business service in one of the workflow steps to send the email request to the Siebel Universal Queuing routing engine.
- 6** The routing engine receives this email request and tries to find a matching routing rule based upon the data in the email work item.

- 7** Once a routing rule is found, the routing engine looks at the first escalation step to determine the required skill for an agent.
- 8** Once an agent is found, the routing engine sends the email data, together with the agent ID, as a request to the EAI Object Manager.
- 9** The EAI Object Manager receives the request and then invokes the Siebel Universal Queuing business service to process the request.
- 10** The Siebel Universal Queuing business service sends this request back to the Communications Session Manager.
- 11** Communications Session Manager processes the email by blinking the Accept Work Item button so that the agent can answer the email request.
- 12** When the email request is answered, the email message will be retrieved from Siebel database and displayed to the agent.

Installing and Running Siebel Universal Queuing

2

This chapter describes how to install and configure the Siebel Universal Queuing routing engine. This chapter also includes information on configuring Siebel applications to use Siebel Universal Queuing.

Preparing to Install Siebel Universal Queuing

Siebel Universal Queuing can be installed before, during, or after the installation of other Siebel components. However, it is strongly recommended that you install Siebel Server before you install Siebel Universal Queuing.

For more information, see the release notes and system requirements and supported platforms documentation for your Siebel applications.

NOTE: Siebel Universal Queuing and Siebel Server should be installed inside the same firewall for security reasons, since HTTP (not HTTPS) is used as the transport mechanism.

Server Configuration for the Routing Engine

You can choose to configure Siebel Universal Queuing to run in one of two ways:

- In a single-server configuration—the default configuration.
- In a dual-server configuration—where a primary set of Siebel Universal Queuing routing engine components resides on one machine and a backup set of components resides on a separate machine. The dual-server configuration facilitates redundancy.

The backup server is used by the Siebel Communications Server when the primary server is functionally unavailable, such as in the event of network failure, system shutdown, and so on.

NOTE: When you install a dual-server configuration, the information provided to the install program must be identical for both the primary and backup servers.

Data you input for these server configurations is described in the tables in this section. Additional data you input relating to your database is described in [“Database Configuration for Recovery Table” on page 37](#). These sections are referenced from the installation procedures for supported Microsoft Windows and UNIX platforms, in [“Installing Siebel Universal Queuing” on page 41](#).

In completing data input for single-server or dual-server configurations, refer to the following paragraphs for additional explanation:

Internal port allocation. The Siebel Universal Queuing routing engine uses a series of consecutively numbered TCP/IP ports for internal communication. Fourteen ports are allocated for this purpose, starting at the base port, which is designated by this setting. By default, the base port is 9000, thus ports 9000 to 9013 are used.

Most users do not need to change the default value. Specify a different value if another application is already using the default port number.

UQ host port (SOAP port) for Communications Server. The UQ host port (or SOAP port) is used by Siebel Communications Server to connect to the Siebel Universal Queuing connector. By default, the UQ host port is 9100. Most users do not need to change this setting. If it is changed, a corresponding change is required for the configuration parameter UQ Host Port. For more information, see [Table 7 on page 58](#).

IP address. The default IP address is the address of the local computer. If the computer is part of a network, then an internal IP address is returned, such as 10.X.X.X, 192.X.X.X, or 168.X.X.X. Siebel Universal Queuing requires a static IP address. The IP address specified here may also be specified as the value of the UQ Host configuration parameter. For more information, see [Table 7 on page 58](#).

Single-Server Configuration

[Table 1](#) provides information required by the installation program for installing the Siebel Universal Queuing routing engine in the single-server configuration.

Table 1. Single-Server Configuration—Required Input

Input	Default	Notes
Hostname of server	Current Hostname	
IP address of server	Current IP	Address of the computer on which you are installing the routing engine. This address must be a static IP address.
Base port for server	9000	Siebel Universal Queuing requires fourteen port numbers starting with the base port.

Table 1. Single-Server Configuration—Required Input

Input	Default	Notes
Port for SOAP listener	9100	Port used by Communications Server to connect to Siebel Universal Queuing. (Corresponds to the UQ Host Port configuration parameter.)
Time interval	300 seconds	Interval for sending statistics information to Communications Server.

Dual-Server Configuration

The tables in this section provide information required by the installation program for installing the Siebel Universal Queuing routing engine in the dual-server configuration.

[Table 2](#) provides information about installing on the primary machine in the dual-server configuration.

Table 2. Primary Server in Dual-Server Configuration—Required Input

Input	Default	Notes
Hostname of primary server	Current Hostname	
IP address of primary server	Current IP	Address of the computer on which you are installing the routing engine. This address must be a static IP address.
Hostname of backup server		
Base port for servers	9000	Siebel Universal Queuing requires fourteen port numbers starting with base port.
Port for SOAP listener	9100	Port used by Communications Server to connect to Siebel Universal Queuing. (Corresponds to the UQ Host Port configuration parameter.)
Time interval	300 seconds	Interval for sending statistics information to Communications Server.

Table 3 provides information about installing on the backup machine in the dual-server configuration.

Table 3. Backup Server in Dual-Server Configuration—Required Input

Input	Default	Notes
Hostname of primary server		Hostname of the primary server.
Hostname of backup server	Current Hostname	
IP Address of backup server	Current IP	Address of the computer on which you are installing the routing engine.
Base port for servers	9000	Siebel Universal Queuing requires fourteen port numbers starting with base port.
Port for SOAP listener	9100	Port used by Communications Server to connect to Siebel Universal Queuing.
Time interval	300 seconds	Interval for sending statistics information to Communications Server.

Database Configuration for Recovery Table

The Siebel Universal Queuing routing engine writes agent state and work-item state data to a table called DUSore. In the dual-server configuration, if the primary server fails for any reason, the backup server recovers the system state from the data in the DUSore table. In a single-server configuration, you can also recover the system state from this table.

NOTE: In order to restart Siebel Universal Queuing in a clean configuration (with no pending work items, no agents logged in, no rules loaded, and so on), the recovery data must be deleted from the DUSore table by a database administrator.

A database table creation script is available on the installation CD for all database platforms that Siebel eBusiness Applications support. The DUStore database table must be created by the database administrator. You can create a new database or use an existing database, such as the Siebel database, to contain this table.

For instructions for creating the DUStore table, see [“Creating the DUStore Recovery Table” on page 45](#).

For more information about database support, see the system requirements and supported platforms documentation for your Siebel applications.

The appropriate database client software for the database that you will use must be installed before you install the Siebel Universal Queuing routing engine. The installer detects which database drivers are installed and only displays the database options that are available on the server.

The installer requires information to connect to the database. The following tables show the required input for each supported database. The required input differs slightly for each database. The account name and password are required in each case.

[Table 4](#) provides information for installing on Microsoft SQL Server.

Table 4. Microsoft SQL Server Database Information

Required Input	Notes
Server Name	The hostname where the SQL Server instance is running.
Database Name	The name of the Siebel database in that instance.
Account Name	A username to access the database.
Account Password	Password for the username.

Table 5 provides information for installing on IBM DB2.

Table 5. IBM DB2 Database Information

Required Input	Notes
Database Alias	The DB2 alias defined on the local machine that points to a specific database on the DB2 database server. For UNIX systems, use the following form: <i>database_hostname.database_alias</i> where <i>database_hostname</i> refers to the DB2 database server machine name and <i>database_alias</i> refers to the DB2 database alias cataloged on the local UNIX machine.
Table Owner	The schema name containing the Siebel database in that database.
DB2 Home Directory (UNIX systems only)	The directory on the local UNIX machine where the DB2 client software is installed—equivalent to \$INSTHOME.
Account Name	A username to access the database.
Account Password	Password for that username.

Table 6 provides information for installing on Oracle.

Table 6. Oracle Database Information

Required Input	Notes
Table Owner	The owner or schema name containing the Siebel database.
Connection String	The Oracle connection string, as defined in the file tnsnames.ora.
Oracle Home Directory	The directory on the local machine where the Oracle client software is installed—equivalent to \$ORACLE_HOME.
Account Name	A username to access the database.
Account Password	Password for that username.

Optimizing IBM AIX and IBM DB2 Universal Database

When running Siebel Universal Queuing on the IBM AIX platform with an IBM DB2 Universal Database, an experienced system administrator should perform the following steps in order to optimize performance.

NOTE: These settings assume that Siebel Universal Queuing and IBM DB2 Universal Database are running on different machines, each running IBM AIX.

On the IBM AIX server machine on which Siebel Universal Queuing is running, add the following lines to the file `/etc/rc.net`:

```
if [ -f /usr/sbin/no ] ; then
    /usr/sbin/no -o tcp_sendspace=65535
    /usr/sbin/no -o tcp_recvspace=65535
    /usr/sbin/no -o tcp_pmtu_discover=1
    /usr/sbin/no -o tcp_nagle_limit=1
    /usr/sbin/no -o fasttimo=50
fi
```

On the IBM AIX server machine on which IBM DB2 Universal Database is running, add the following lines to the file `/etc/rc.net`:

```
if [ -f /usr/sbin/no ] ; then
    /usr/sbin/no -o fasttimo=200
    /usr/sbin/no -o tcp_sendspace=32768
    /usr/sbin/no -o tcp_recvspace=32768
fi
```

Installing Siebel Universal Queuing

This section provides instructions for installing the Siebel Universal Queuing routing engine on supported Microsoft Windows and UNIX platforms.

Preinstallation Checklist

The preinstallation checklist helps you make sure that you have access to the information needed during the installation.

To prepare for a successful installation, determine the defaults you are going to accept, and the server and database configuration choices you have to make. See [Table 1 on page 35](#) through [Table 6 on page 39](#) for more information regarding the following issues:

- The type of installation you want to perform: single-server or dual-server (if dual-server, you specify separate information for primary and backup server)
- Primary server hostname and base port number
- If using a backup server, the backup server hostname
- SOAP port number and the interval time
- IP address
- Choice of an appropriate database:
 - Microsoft SQL Server database input requiring: server name, database name, account name, and password
 - IBM DB2 database input requiring: database alias, table owner, DB2 home directory (UNIX systems only), account name, and password
 - Oracle database input requiring: table owner, connection string, home directory, account name, and password

Installing the Routing Engine on Microsoft Windows

The following procedure describes how to install the Siebel Universal Queuing routing engine on a Microsoft Windows system.

For more information, see the release notes and system requirements and supported platforms documentation for your Siebel applications.

To install the routing engine on Microsoft Windows

- 1** Log into the Microsoft Windows system as an administrator or a user with administrative privileges.
- 2** Insert the *Windows Server Ancillary Programs* CD into the CD-ROM drive of the chosen computer.
- 3** Select Siebel Universal Queuing.
- 4** When the welcome screen appears, click Next and follow the prompts to continue with the installation process.

As the installer guides you through the installation process, it validates the system, and installs the routing engine. You are prompted to reboot after the installation.

- 5** Click Finish and reboot the system.

Uninstalling on Microsoft Windows

The following procedure gives instructions for uninstalling the Siebel Universal Queuing routing engine from your Microsoft Windows system.

To uninstall the routing engine on Microsoft Windows

- 1** Click Start > Settings > Control Panel, and double click Add/Remove Programs.
The Add/Remove Programs dialog box appears.
- 2** Select Siebel Universal Queuing Server.
- 3** Click Add/Remove.

The Siebel Universal Queuing uninstall dialog box appears.

- 4 Click Yes to finish uninstalling the routing engine.
- 5 Reboot the system after removing the software.

Installing the Routing Engine on UNIX

The following procedure gives instructions for installing the Siebel Universal Queuing routing engine on supported UNIX platforms.

For more information, see the release notes and system requirements and supported platforms documentation for your Siebel applications.

To install the routing engine on UNIX

- 1 Log in as root, or as another user with root access, on the chosen computer.

Root access is required in order to authenticate the user who is performing the installation. Depending on your system, you may need to log in as the root user.
- 2 Insert the *Server Ancillary Programs* CD for your supported UNIX platform into the CD-ROM drive of the chosen computer.
- 3 Mount the CD-ROM, if required, to make it accessible.
- 4 Navigate to the following directory on the CD-ROM:

`Thirdpty/enu/universal_queuing/avaya/uq`
- 5 To start the Siebel Universal Queuing installation script, type the following command in the directory in which the script is located on the CD, and press Enter:

`./install`

You receive the following message:

The Universal Queuing Server will be installed on this computer.
- 6 To continue the installation, press Enter.
- 7 Verify the path where Siebel Universal Queuing will be installed, or specify a different installation directory.

The directory `scomm/uq` is created in the directory you specify here.

8 Choose the type of installation:

- Single Server
- Dual Server - Primary with Backup
- Dual Server - Backup

For more information about [Step 8](#) and [Step 9](#), see “[Server Configuration for the Routing Engine](#)” on page 34.

9 Choose the appropriate settings for configuring the server for which you are performing the installation.

10 Choose the appropriate database type option: Oracle or IBM DB2.

For more information about [Step 10](#) and [Step 11](#), see “[Database Configuration for Recovery Table](#)” on page 37.

11 Provide the required information for configuring your chosen database type in order to install the database recovery table DUSore.

12 Verify that the confirmation screen reflects the correct configuration parameters.

If changes are required, select the desired options during confirmation. For descriptions of the configuration parameters, see [Table 7 on page 58](#).

When all files have been extracted and the installation is finished, you receive the message “Installation Complete.”

Starting Universal Queuing Services After Installing

The routing engine (UQ services) does not start automatically after installation on UNIX systems, unless you take further steps. You have two choices:

- Start the UQ services manually after installing. For information about restarting the UQ services manually, see “[Running the Siebel Universal Queuing Routing Engine](#)” on page 47.

- Configure the UQ services to start automatically the next time the machine is restarted. Optionally, the installer can also start the UQ services manually immediately after installing.

When you install, the following lines are written to the shell output and to the installation log file (*install_dir/scomm/uq/logs/uqinstall.log*). To configure the UQ services to start automatically, append the files as directed.

Please append the file *install_dir/scomm/uq/etc/inetd.conf.append* to your System File */etc/inetd.conf*

Please append the file *install_dir/scomm/uq/etc/services.append* to your System File */etc/services*

In these lines, *install_dir* is the directory into which you installed the Siebel Universal Queuing routing engine in [Step 7 on page 43](#).

Creating the DUScore Recovery Table

Use the following procedure to create the DUScore table for your supported database, as may be required for your Siebel Universal Queuing configuration. This database table must be created by the database administrator. This procedure can be run before or after you install Siebel Universal Queuing.

For more information, see [“Database Configuration for Recovery Table” on page 37](#).

To create the DUScore table

- 1 Log into your database as an administrator or a user with administrative privileges.
- 2 Insert the *Server Ancillary Programs* CD for your supported platform into the CD-ROM drive of the chosen computer.
- 3 UNIX only: mount the CD-ROM, if required, to make it accessible.
- 4 Navigate to the following directory on the CD-ROM:

Windows: *Thirdpty\enu\universal_queuing\avaya\Database Scripts*

UNIX: *Thirdpty/enu/universal_queuing/avaya/Database Scripts*

- 5** Depending upon the database you will use for the DUStore table, run one of the following scripts, using an SQL analyzer tool supported by your database.

- `dustore_mssql.sql`
- `dustore_db2.sql`
- `dustore_oracle.sql`

Reconfiguring Siebel Universal Queuing After Installation

During installation of the Siebel Universal Queuing routing engine, various operating system parameters are tested by the installer to determine if conditions are appropriate to continue with the setup process.

Required configuration parameters, including those specifying server IP addresses and ports, API ports, failover configuration, or other settings, are specified during the installation so that, after the installation, the subsystem is ready to run. For more information about configuration parameters, see [Table 7 on page 58](#).

The desired configuration is selected during installation. Limited reconfiguration is available by running the installation program again using the Repair option.

NOTE: A complete reinstallation is required if you change the database connection information.

Running the Siebel Universal Queuing Routing Engine

The Siebel Universal Queuing routing engine runs on a server in the background. All processes can be configured to automatically start when the server starts up. This section describes how you can determine if the processes are running and describes how to start them for Microsoft Windows and UNIX platforms.

For information on Siebel Universal Queuing routing engine or Siebel Communications Server failure procedures, see [“Implementing Failure Recovery” on page 51](#).

Verifying and Running Routing Engine Processes on Microsoft Windows

This section describes how to verify that the Siebel Universal Queuing routing engine processes are running properly on Microsoft Windows platforms. Instructions for starting the services to run these processes are also included.

The following are the processes to verify:

- adusrv.exe
- armsrv.exe
- vdusrv.exe
- dssrv.exe
- orbsrv.exe
- qatdsrv.exe
- qntinetd.exe
- qntorbsrv.exe
- quqconnector.exe
- dustore.exe (This process may not be running for a single-server configuration where no database information was specified.)

To check if all routing engine processes are running

- 1 Using the right mouse button, click a blank area on the taskbar.
- 2 Choose Task Manager.
The Windows Task Manager dialog box appears.
- 3 Verify that the processes listed earlier are running.
- 4 If any processes are not running, restart the routing engine services as described in [“Starting the Routing Engine Services on Microsoft Windows.”](#)

Starting the Routing Engine Services on Microsoft Windows

This section describes how to start the routing engine services on Microsoft Windows. The two services that must be running are:

- UQ Engine - Data Service
- UQ Engine - Orb Service

To start the routing engine services

- 1 Do *one* of the following, according to your Microsoft Windows platform:
 - On Microsoft Windows NT: choose Start > Settings > Control Panel > Services, select UQ Engine - Orb Service, and click Start.
 - On Microsoft Windows 2000: choose Start > Settings > Control Panel > Administrative Tools > Component Services, select UQ Engine - Orb Service (from “Services (Local)”), and click the Start Service button.
- 2 Repeat [Step 1](#) for the UQ Engine - Data Service, until both services are started.

Once these two services are started, all routing engine components should be up and running.

Verifying and Running Routing Engine Processes on UNIX

This section describes how to verify that the Siebel Universal Queuing routing engine processes are running properly on supported UNIX platforms. Instructions for starting these processes are also included.

The following are the processes to verify:

- adusrv
- armsrv
- vdusrv
- dssrv
- orbsrv
- qatdsrv
- quqconnector
- dustoresrv (This process may not be running for a single-server configuration where no database information was specified.)

To check if all routing engine processes are running

- 1** Type the following command:

```
ps -ef | grep uq
```
- 2** Verify that the processes listed earlier are running.
- 3** If any processes are not running or responding, restart the services, as described in [“Starting and Stopping Routing Engine Processes on UNIX.”](#)

Starting and Stopping Routing Engine Processes on UNIX

This section describes how to start and stop the routing engine processes on supported UNIX platforms.

To start the routing engine processes

- 1 From the *install_dir/scomm/uq/bin* directory, type the following command:

```
start_cti start
```

where *install_dir* is the location where you installed the Siebel Universal Queuing routing engine.

- 2 Verify that the processes are running, as described earlier.

All routing engine components should be up and running.

To stop the routing engine processes

- 1 From the *install_dir/scomm/uq/bin* directory, type the following command:

```
start_cti stop
```

where *install_dir* is the location where you installed the Siebel Universal Queuing routing engine.

- 2 Verify that the processes are no longer running, as described earlier.

Implementing Failure Recovery

This section describes the failure recovery procedures that occur during one of these two types of system failure:

- Siebel Universal Queuing failure
- Siebel Communications Server failure

In order to provide the ability to recover from failure, Siebel Universal Queuing saves information in the database at regular intervals. During that interval, the following critical state change for agents and work items are saved:

- Agent states: LOGGEDIN, AVAILABLE, AUXWORK, LOGGEDOUT
- Work item states: RECEIVED, QUEUED, SCHEDULED, ACTIVE, WRAPUP, COMPLETED

Heartbeat Protocol

The Siebel Universal Queuing routing engine can detect connection failures actively by implementing a *heartbeat* protocol with Siebel Communications Server.

In the heartbeat protocol, Siebel Communications Server sends a message with a sequence number to the routing engine on every request connection of each connection set. The message is sent at each interval as determined by the value of the Ping Interval parameter. The default value of this parameter is 30 (seconds). Upon receiving a heartbeat message, the routing engine echoes the sequence number back in the response and restarts the Ping Interval timer.

If the Ping Interval timer expires, it is automatically reset. If the Ping Interval timer expires two consecutive times, the routing engine declares the connection to have failed and initiates recovery as described in [“Siebel Universal Queuing Failure,”](#) below. If a heartbeat request is received with the sequence number out of order, the routing engine treats this the same as a timer expiration.

If Siebel Communications Server encounters a network error when issuing a heartbeat request, Siebel Communications Server will initiate failure recovery and reconnect as described in [“Siebel Communications Server Failure”](#) on page 53.

For more information about setting the Ping Interval parameter, see [Table 7 on page 58](#).

Siebel Universal Queuing Failure

The Siebel Universal Queuing routing engine is designed not to lose any work items that have been successfully introduced into the system, regardless of subsequent errors or system failures.

The dual-server configuration allows you to have two identical routing engine instances running on different machines: a *primary* machine controlling system state and a *standby* machine tracking system state without exerting any control. The standby instance recovers state information from the database when the primary instance fails.

The failover process is as follows:

- 1** The primary and standby instances start, negotiate roles, and arrive at one of the following modes:
 - a** The starting Siebel Universal Queuing instance assigns the primary role to the other Siebel Universal Queuing instance.
 - b** If the assign request succeeds, the other instance returns an indication that it is up and active, and the requesting instance takes on the standby role.
 - c** If the request fails, then this is the only routing engine instance, and it takes on the primary role.
 - d** In the race condition, where both instance start and try to assign to each other at the same time, the instances detect this and fall back to static configuration, assigning roles through a random number exchange.

NOTE: A routing engine instance in standby mode must never accept a Siebel Communications Server connection.

- 2** The standby instance monitors the primary instance to determine when to transition from standby to primary mode.
- 3** The standby instance transitions to primary mode after detecting that the primary instance is no longer available. Before it accepts a Siebel Communications Server connection, it tries to restore all the logged-in agent information and work-item information from the DUSore table.

- 4 The standby instance will then establish a connection to the Siebel Server using the connection information from the primary instance.
- 5 The standby instance will also use the routing rules information from the primary instance to initialize itself.
- 6 Once the connections are established to Siebel Server, the standby instance is ready to begin normal operation.

When the routing engine detects a failure on the socket carrying the statistics connection set, then the routing engine tries to reopen the connection. If it does not succeed after 10 attempts, the routing engine raises a critical alarm. Statistics are not buffered, so failure to reconnect may result in a loss of statistics data.

Siebel Communications Server Failure

When the Siebel Universal Queuing routing engine detects that it has failed to receive a heartbeat message from any active Siebel Communications Server connection, the following actions are taken:

- The routing engine attempts to send a critical alarm. However, this may not be possible if no other client asynchronous inputs are available.
- The routing engine logs out all agents that logged in through the failed Siebel Communications Server.

The scenarios to consider for *normal* connection failures are as follows:

- The connection fails because Siebel Communications Server has failed—Siebel Communications Server does not recover, and agents fail over to another Siebel Communications Server.

When the agents log in, they are using a different Communications Server and, therefore, a different connection ID, from the one used before the failure.

When the routing engine detects that it no longer receives the heartbeat message within the time specified by the Ping Interval parameter, as a result of a Siebel Communications Server failure, but the agents have logged back in within the disconnect retry time, the following actions will occur:

- Interactive items assigned to agents when Siebel Communications Server failed will be completed by the routing engine with a reason code of abnormal termination.
- Noninteractive items will be requeued. There will be an agent journal entry created to account for the time period of the failure.
- Agent journal entries will be generated for affected agents to indicate that the agent logged in again after the failure. If, after the disconnect retry time, the agent has not logged back in, then the work items that were assigned to that agent when the failure was detected will be requeued.
- The connection fails because Siebel Communications Server has failed—agents do not fail over and do not promptly log in again.

When the routing engine detects that it no longer receives the heartbeat message within the time specified by the Ping Interval parameter, as a result of a Siebel Communications Server failure, and the agents have not logged back in within the disconnect retry time, the following actions will occur:

- Interactive items assigned to agents when Siebel Communications Server failed will be completed by the routing engine with a reason code of abnormal termination.
- Noninteractive items will be placed back in queues.
- Agent journals will be generated for all agents logged in on the failed connection, with a logout reason code of connection failure.

Configuring Siebel Universal Queuing

This section describes the procedure for setting up your queuing system for the first time. It also describes how to modify the various elements in your system.

The following gives an overview of the order in which you define the elements in Siebel Universal Queuing:

- 1** Define the configuration parameters so that Universal Queuing can communicate with Siebel Server. For more information, see [“Defining Configurations” on page 57](#).
- 2** Specify the channels for which work items will be routed by Siebel Universal Queuing. For more information, see [“Defining Channels” on page 65](#).
- 3** Specify employee skills and expertise levels. For more information, see [“Assigning Employee Skills” on page 67](#).
- 4** Determine, for each employee, the number of simultaneous sessions for each channel. For more information, see [“Defining Employee Channel Capacity” on page 69](#).
- 5** Define the routing rules for each channel. For more information, see [“Defining Routes, Route Properties, and Escalation Rules” on page 84](#).
- 6** Define the escalation steps for each route. For more information, see [“Defining a Route Escalation” on page 91](#).

Views in the UQ Administration Screen

Siebel Universal Queuing is primarily configured using the UQ Administration screen. The views in this screen are listed here in the sequence in which you work with them.

Views for Configuring Siebel Universal Queuing Elements

The following views are used to specify Siebel Universal Queuing configurations, channels, employees, and routes. The order in which the following views are arranged in the Show drop-down list is the order in which you will configure these elements.

- **Configurations.** Create, modify, copy, or delete a record for a named Siebel Universal Queuing configuration. Define the parameters associated with a configuration. For more information, see [“Defining Configurations” on page 57](#).
- **Channels.** Create or modify channels and specify associated properties for each type of media channel to be routed by Siebel Universal Queuing. Channel properties you define here are used in defining route properties. For more information, see [“Defining Channels” on page 65](#).
- **Employees.** View or modify information for each employee. Assign skill competencies and skill levels to be used for routing work items. Specify the number of work items for each channel an employee can work on simultaneously. For more information, see [“Assigning Employee Skills” on page 67](#) and [“Defining Employee Channel Capacity” on page 69](#).
- **Routes.** Create, modify, copy, or delete routing and escalation rules for each channel type. For more information, see [“Creating Routes and Escalations” on page 82](#).

Views for Reviewing Run-Time Status Data

The following views display run-time status information about channels, employees, and routes.

- **Channel Statistics.** View activity information about the work items for each channel type. For more information, see [“Viewing Channel Status Data” on page 106](#).
- **Employee Statistics.** View detailed activity information about each employee that is logged into Siebel Universal Queuing. For more information, see [“Viewing Employee Status Data” on page 107](#).
- **Route Statistics.** View detailed activity information about the work items in each route. For more information, see [“Viewing Route Status Data” on page 109](#).

Other Views

The following views display historical information about channels, routes, and any alarms or errors that have occurred.

- **Historical Channel Statistics.** View information about channel activity over a specified period of time. For more information, see [“Viewing Historical Channel Statistics” on page 111](#).
- **Historical Route Statistics.** View information about route activity over a specified period of time. For more information, see [“Viewing Historical Route Statistics” on page 111](#).
- **Alarms and Errors.** View information about warnings and errors that have occurred. For more information, see [“Viewing Alarms and Errors” on page 104](#).

Defining Configurations

This section describes the configuration parameters that you define in order for Siebel Universal Queuing to communicate with Siebel Server. These configuration parameters only need to be defined once.

You can define multiple Siebel Universal Queuing configurations. However, you must specify one configuration as *primary*. The primary configuration is the configuration used as the default if no specific configuration is named when an attempt is made to connect to Universal Queuing.

For example, when an agent is configured in Communications Server, you can optionally specify a Siebel Universal Queuing configuration using the UQConfigurationName parameter. This parameter is part of the communications configuration, which is administered in the All Configurations view of the Communications Administration screen.

(The agent can specify the communications configuration to be in effect for the next session, using the Communications view of the User Preferences screen. For more information about communications configurations, refer to *Siebel Communications Server Administration Guide*.)

If a Siebel Universal Queuing configuration is specified using the `UQConfigurationName` parameter, the agent will be connected to that instance of Siebel Universal Queuing upon logging in. If no Siebel Universal Queuing configuration is specified in the applicable communications configuration, then the agent will be logged in using the primary Siebel Universal Queuing configuration.

The primary configuration is especially important for determining how to route work items that are initiated by a customer from a Siebel application running on your company's Web site.

For example, if a customer is using Siebel eService or another Siebel application and initiates an email work item, this customer is not defined as an agent in a communications configuration. Because the `UQConfigurationName` configuration parameter is therefore not in effect for this customer, the Siebel Universal Queuing configuration to use for routing this work item is the one designated as the primary configuration.

Siebel Universal Queuing configuration parameters are listed and described in [Table 7](#).

Table 7. Siebel Universal Queuing Configuration Parameters

Parameter	Required?	Description
AuxWork After Login	N	If this parameter is set to TRUE, the agent will be put into auxwork mode immediately after logging in. The agent must click the Change Ready State button in order to receive new work items. The default value is FALSE.
Backup UQ Host Name	N	The name of the secondary Siebel Universal Queuing host. The secondary Siebel Universal Queuing is used for failure recovery purpose.
Backup UQ Host Port	N	The port number of the secondary Siebel Universal Queuing host.

Table 7. Siebel Universal Queuing Configuration Parameters

Parameter	Required?	Description
Connection Time Out	N	The timeout interval on logging in, sending requests, and receiving requests, in milliseconds. This value is used in the HTTP transport layer. The default is 10 minutes (600000 milliseconds), which is usually enough. If the skill map is large and requires a long time to load when the routing rules are first loaded, set this parameter to a larger value.
Disconnect Retry Time	N	The number of retries before disconnecting, if there is any problem logging in, sending requests, and receiving requests. The default is 10 times. The Connection Time Out parameter determines when a timeout will have been reached, after which another connection attempt may be made, according to the number of retries specified by Disconnect Retry Time.
HTTP Accept Header	N	For the HTTP header field HTTPAccept. The default value is "text/xml". Do not modify this value.
HTTP Content Type	N	For the HTTP header field HTTPContentType. The default value is "text/xml". Do not modify this value.
HTTPLoginBodyTemplate	Y	Login information for normal connections from the Siebel Universal Queuing routing engine to the EAI Object Manager on the Siebel Server. Normal connections (as compared with statistics connections) are used for processing communications work items. See also the description of the MaxConnections parameter. For example, this parameter might be defined as follows: <code>UserName=sadmin&Password=db2</code>
HTTPLogoutURLTemplate	N	Logout information to disconnect the Siebel Universal Queuing routing engine from the EAI Object Manager on the Siebel Server, for normal connections. If you set this parameter, define it exactly as follows: <code>SWEExtCmd=Logout</code>

Table 7. Siebel Universal Queuing Configuration Parameters

Parameter	Required?	Description
HTTPURLTemplate	Y	URL for normal connections from the Siebel Universal Queuing routing engine, through the Siebel Web server, to the EAI Object Manager on the Siebel Server. For example, this parameter might be defined as follows: <pre>http://web_server/obj_mgr/start.swe</pre> where <i>web_server</i> is the Web server name and <i>obj_mgr</i> is the name of the virtual directory (on the Web server) for the EAI Object Manager. For example, this virtual directory name might be “eai_enu”.
Logout From Available	N	Agent can log out from the available state only if this parameter is set to TRUE. The default is TRUE.
MaxConnections	N	The number of connections that Siebel Universal Queuing will establish to the EAI Object Manager. The default is 3. This specified number applies separately to both normal connections and statistics connections. If, for example, MaxConnections is set to 3, then there will be a total of 6 connections established between Siebel Universal Queuing and the EAI Object Manager. <i>Note:</i> The maximum number of statistics connections is always 5. For example, if MaxConnections is set to 4, then the total number of EAI connections will be 8 (4 + 4). However, if MaxConnections is set to 6, then the total number of connections will be 11 (6 + 5). This parameter is mainly used for performance reasons.
Ping Interval	N	The number of seconds defining how often to ping Siebel Universal Queuing. The default is 30 seconds. For more information, see “Implementing Failure Recovery” on page 51.

Table 7. Siebel Universal Queuing Configuration Parameters

Parameter	Required?	Description
SecondaryHTTPLoginBodyTemplate	Y	Login information for secondary (statistics) connections from the Siebel Universal Queuing routing engine to the EAI Object Manager on the Siebel Server. Statistics connections are used for messages that are not time-critical, such as alarm, error, journal, and statistics data. This data will be processed in a nontime-critical fashion. Statistics connections may be to the same EAI Object Manager as for normal connections, which are used for processing communications work items. Or, you may prefer to connect to a separate EAI Object Manager. Statistics connections are specified using the SecondaryHTTPURLTemplate parameter. See also the description of the MaxConnections parameter. For example, this parameter might be defined as follows: <code>UserName=sadmin&Password=db2</code>
SecondaryHTTPLogoutURLTemplate	N	Logout information to disconnect the Siebel Universal Queuing routing engine from the EAI Object Manager on the Siebel Server, for secondary (statistics) connections. If you set this parameter, define it exactly as follows: <code>SWEExtCmd=Logout</code>
SecondaryHTTPURLTemplate	Y	URL for secondary (statistics) connections from the Siebel Universal Queuing routing engine, through the Siebel Web server, to the EAI Object Manager on the Siebel Server. For example, this parameter might be defined as follows: <code>http://web_server/obj_mgr/start.swe</code> where <i>web_server</i> is the Web server name and <i>obj_mgr</i> is the name of the virtual directory (on the Web server) for the EAI Object Manager. For example, this virtual directory name might be "eai_enu".

Table 7. Siebel Universal Queuing Configuration Parameters

Parameter	Required?	Description
Skill:skill_name	Y	Skill dictionary that contains a list of skills and associated skill items. This skill dictionary must be defined to include every skill definition that is to be used by the routing engine. Define your skills before you start Siebel Universal Queuing. The value for Skill:skill_name is in this form: <i>BusObj, BusComp, Field</i> In order to correctly define instances of the Skill parameter, you must use the correct names for the applicable business objects, business components, and fields, as defined in Siebel Tools. For example: Skill:Email Recipient Name=CommSrv CM Adapter Administration, CommSrv CM Adapter Profiles, Name Skill:Industry=Industry, Industry, Name Skill:Language Code=Language Def, Language Def, Language Code Skill:Product=Internal Product, Internal Product, Name <i>Note:</i> In order to be able to define an instance of the Skill:skill_name parameter in the Configurations view, a corresponding List of Values entry of type UQ_CFG_PARAM must already exist. For more information about configuring Lists of Values, refer to <i>Applications Administration Guide</i>. See also “Assigning Employee Skills” on page 67 and “Creating Skill Definitions” on page 94.
Trace FileName	N	The name of the Siebel Universal Queuing log file, can also further specify the path for it. For example, this parameter might be defined as follows: uqtrace.log

Table 7. Siebel Universal Queuing Configuration Parameters

Parameter	Required?	Description
Trace Level	N	Specifies a number that is used internally to decide what level of logging will be performed. To have full logging information, use 69905. The default is 0—no logging is performed.
UQ Host Name	Y	Identifies Siebel Universal Queuing to the Siebel Server.
UQ Host Port	Y	Identifies the port for Siebel Server to communicate with Siebel Universal Queuing.
Use Resonate	N	If you are using Resonate Central Dispatch, you must set this parameter to TRUE. Otherwise, you should set it to FALSE. The default is FALSE.
Wrap Enabled	N	If this parameter is set to TRUE, then the agent will be set to Not Ready automatically after completing a work item. The default is FALSE. For more information, see “Agent Availability and Sequential Assignment” on page 25 .

Creating a Universal Queuing Configuration

You create a new Universal Queuing configuration as part of the Siebel Universal Queuing configuration process. The configuration is defined using the Configurations view in the UQ Administration screen. You can copy an existing configuration and modify the necessary parameters for the new configuration as well.

To create a configuration

- 1 From the application-level menu, choose View > Site Map > UQ Administration > Configurations.

The Configurations view appears.
- 2 Create a new record in the Configurations list.
- 3 Type the name for the new configuration in the Configuration Name field.

- 4 Click the check box in the Primary column if this configuration is to be the primary configuration.

As noted earlier in this section, you must designate one configuration as the primary configuration. This configuration will be in effect when no configuration is otherwise specified.

- 5 Type a description for this new configuration.
- 6 Step off the record to save the new configuration.
- 7 Add new parameters to define this configuration as follows:

- a Create a new record in the Parameters list.
- b Choose the parameter you want to add from the Name drop-down list.
- c Type the value for the parameter in the Value field.

For descriptions of the Siebel Universal Queuing configuration parameters, see [Table 7 on page 58](#).

Editing a Configuration

You can edit a configuration by changing one or more of the configuration parameters. This might occur because you have changed one or more of the optional configuration parameters, such as the maximum number of connections to Siebel Server. You change a parameter by editing its record in the Parameters list.

For descriptions of the Siebel Universal Queuing configuration parameters, see [Table 7 on page 58](#).

NOTE: After a configuration parameter value has been changed, agents need to log out and log in again to use the changed configuration. If a Skill:*skill_name* configuration parameter was added, then you must use the Notify UQ button before the agents log in. For more information, see [“Notifying Siebel Universal Queuing of Updates” on page 83](#).

Deleting a Configuration

You can delete a Siebel Universal Queuing configuration when it is no longer applicable.

Defining Channels

Channels are the forms of communication work items that can be routed by Siebel Universal Queuing. Examples of channel types include the following:

- Voice
- Email
- Service request
- Activity

Your implementation of Siebel Universal Queuing can include any communication type that can be handled by the underlying communications infrastructure that is passing the resulting work item to Siebel Universal Queuing. Siebel Universal Queuing can route any work item that contains a channel type and corresponding work item characteristics that can be matched to routing rules.

For each channel, you specify a service level. The service level is the desired percentage of work items to be routed in a specified period of time. The service level is not used in the routing process, but sets a basis for monitoring a route's performance. When the service level for a channel is exceeded, alarms are triggered and logged. This allows you to examine the work load for a particular channel in real time and make changes to your configurations as necessary.

You should have one channel defined for each channel type. Only one channel can be *primary* at any given time for each channel type. The primary channel is the currently active channel for that channel type.

When you find it necessary to change a channel definition, you should add a new channel for the channel type and make it primary rather than changing the existing channel definition. Historical statistics are gathered and logged based on the current channel definition. If you change the channel definition, the historical information for that channel type will no longer be valid.

CAUTION: You should never delete a channel definition unless you understand the effect the deletion will have on the historical statistical data that has been logged.

For each channel, you create channel properties, which are used to define routing rules. These properties only need to be defined once. The properties you define here are those that appear in the drop-down list for the Property Name field in the Properties list, in the Routes view. You will use a subset of these properties to define the selection criteria when creating routing rules and a subset of these properties will be a part of each work item for this channel.

Channels and channel properties are defined using the Channels view in the UQ Administration screen.

To add a channel

- 1 From the application-level menu, choose View > Site Map > UQ Administration > Channels.

The Channels view appears.

- 2 Choose the channel type from the Channel Type field.
- 3 Click the check box in the Primary column if this channel is the primary channel to be used for this channel type.
- 4 Type the amount of time (in minutes) in the Service Level (mins) field.

This is the amount of time in which work items in this route are expected to be handled. You can use decimals for values less than a minute—for example, 1.5 minutes equals one minute and thirty seconds.

- 5 Type the service level percentage in the Service Level Percentage field.

This is the percentage of work items that are expected to be handled within the Service Level time.

- 6 Step off the record to save the new channel.

Modifying Channels

You can change the service level and channel properties for a channel by adding a new channel and making the new channel *primary*.

CAUTION: You should never change an existing channel definition because it will affect the validity of the historical data that has been saved based on the existing definition. You should never delete a channel unless you understand how the deletion will affect the historical data.

Assigning Employee Skills

Siebel Universal Queuing uses a skills-based algorithm to determine the most qualified *agent* to handle a work item. To be considered a qualified agent by Siebel Universal Queuing, an employee must first be defined as an agent in a communications configuration. The employee then needs to have skill definitions assigned in the UQ Administration screen.

For more information about defining employee skills, refer to *Applications Administration Guide*.

In the case where more than one agent is qualified to handle a work item, then the work item will be assigned to the agent who was least recently assigned a work item.

An employee can have many skill definitions. Each skill definition consists of a skill identifier (skill ID), a skill value (competency), and a skill expertise value ranging from Novice to Expert. A skill identifier can be used multiple times with different skill competencies when defining an employee's skill set. The same skill competency can be used for more than one skill identifier.

For example, an employee could have the following skill definition:

Skill ID	Skill Competency	Expertise
Spoken_Language	English	Expert
Spoken_Language	Mandarin Chinese	Novice
Written_Language	English	Intermediate

Skill expertise values are always considered to be greater than or equal to. For example, a work item requiring a skill expertise of Novice could be handled by an agent with a skill expertise of Intermediate or Expert. However, a work item requiring a skill expertise of Expert would not be routed to an agent with a skill expertise of Intermediate or Novice.

A predefined list of skill identifiers and allowable skill competencies is loaded each time the routing engine is started. These skill identifiers and competencies are lists of values created in the Applications Administration screen. Skills are stored in the database, using the Skill:*skill_name* parameter. The skill identifiers and skill competencies are data items used by the routing rules to match against work item data properties. For more information about this parameter, see [Table 7 on page 58](#).

A virtual agent skill called *AgentID* is automatically added to an agent's skill profile when the agent logs on. The *AgentID* value is equal to the agent's user ID with an expertise value of expert. This virtual agent skill can be used just as any other skill when defining escalation rules. The purpose of this skill is to simplify routing of work items to a specific agent. For information on using the virtual agent skill in route escalations, see [“Defining a Route Escalation” on page 91](#).

An agent's skill profile is made available to Siebel Universal Queuing when that agent logs on. The agent's skill profile can be changed through the UQ Administration screen while the agent is logged on by using the Notify UQ button. Notify UQ reloads routes and skill definitions. For more information, see [“Notifying Siebel Universal Queuing of Updates” on page 83](#).

Employee skills are defined through the Employees view in the UQ Administration screen.

To assign a skill to an employee

- 1 From the application-level menu, choose View > Site Map > UQ Administration > Employees.
- 2 Select the desired employee.
- 3 From the Skills list, add a new record.
- 4 Choose a skill category from the Skill drop-down list.
- 5 From the Employee Competencies list, add a new record.
- 6 In the Skill field, click the select button.

The Skill dialog box appears.

- 7** Choose the specific skill from the list and click OK.

For example, if you chose Product in [Step 4 on page 68](#), then you will see the Product drop-down list.

- 8** Choose the expertise level for the skill.

The following expertise levels are available:

- Expert
- Intermediate
- Novice

- 9** Save the skill record.

- 10** If the employee whose skills you have changed is currently logged on to Siebel Universal Queuing, click Notify UQ.

Otherwise, the changes will take affect the next time the employee logs on. If you have added a new Skill:*skill_name* configuration parameter, then you *must* use Notify UQ. For more information, see [“Notifying Siebel Universal Queuing of Updates” on page 83](#).

- 11** Continue to add skills in the Employees view, as needed, to create skill profiles for employees.

Defining Employee Channel Capacity

You must define the channel capacity for each employee who will receive work items from Siebel Universal Queuing. The channel capacity is the number of work items for each channel type that can be sent to an employee simultaneously.

In order for an employee to receive work items for a particular channel, the employee must have at least one simultaneous session defined for that channel. If channel capacity is not defined for a particular channel, that employee will not be considered for work items of that channel type when the routing rules are executed.

If a channel capacity for an employee is defined for several different channel types, then work items for those channel types can be sent to the employee simultaneously. For example, if an employee is defined to handle two email sessions and one voice call session simultaneously, then that employee could potentially receive two email work items and one voice call work item at the same time.

Depending on the type of work item, an employee may have more than one simultaneous sessions defined for a channel. This allows the employee to work on more than one work item of that type at any given time. However, if you are using either of the two approaches to sequential assignment, only one work item will be sent to an agent at a time, as long as the simultaneous sessions setting is greater than zero.

You use the Simultaneous Sessions list of the Employees view to define an employee's channel capacity.

For more information about sequential assignment, see [“Configuring Sequential Assignment” on page 73](#).

To define simultaneous sessions

- 1 From the application-level menu, choose View > Site Map > UQ Administration > Employees.
The Employees view appears.
- 2 Click the active record indicator for the desired employee.
- 3 Click the Simultaneous Sessions view tab.
- 4 In the Simultaneous Sessions list, create a new record.
- 5 Select the channel type from the Channel Type drop-down list.
- 6 In the Simultaneous Sessions field, enter the number of simultaneous sessions this employee is allowed for this channel type.

The changes will take effect the next time the employee logs on to Siebel Universal Queuing.

Defining Communications Configurations

In order for the Siebel Universal Queuing routing engine to assign an available agent to work on certain work items, agents must be assigned to a communications configuration (for Siebel Communications Server) that includes Siebel Universal Queuing. If a specific Siebel Universal Queuing configuration is not specified, by using the UQConfigurationName parameter, then the primary (or default) configuration is automatically used.

The following steps summarize the procedure for configuring Siebel Communications Server to work with Siebel Universal Queuing. This procedure should be taken as a general outline of the process of setting up a communications configuration that will work with Siebel Universal Queuing.

For complete information about creating or importing a communications configuration and about defining elements for this configuration, refer to *Siebel Communications Server Administration Guide*.

Sample communications definitions data and files (.def files) are provided by Siebel Systems. The file multichannelA.def corresponds to the sample communications configuration named “Multichannel configuration A.” For more information about the file callrouteA.def, see [“Configuring Sequential Assignment” on page 73](#).

To configure a call center agent

- 1** From the application-level menu, choose View > Site Map > Communications Administration > All Configurations.
- 2** In the All Configurations view, add a new configuration. Import configuration data from a communications definition file, as appropriate.
- 3** Click the Parameters view tab.
- 4** Optionally, in the Parameters list, enter a valid Siebel Universal Queuing configuration name as the value for the UQConfigurationName parameter.
- 5** Click the Agents view tab.
- 6** In the Agents list, select a call center agent name.

- 7** From the Show drop-down list, choose Agent General Profile.

In the Agent General Profile view, the current record represents the agent you specified for the configuration in [Step 6](#).

- 8** Click the Configurations view tab.

- 9** In the Configurations list, include the communications configuration name you created in [Step 2](#), and mark it as primary for this agent.

- 10** Click the Telesets view tab.

- 11** In the Telesets list, choose a teleset for this agent, if the agent will work with voice calls and Siebel Universal Queuing is to route voice calls to this agent's teleset extension.

Configuring Sequential Assignment

As described in [“Agent Availability and Sequential Assignment” on page 25](#), there are two ways of enabling sequential assignment for Siebel Universal Queuing:

- Using the Wrap Enabled configuration parameter
- Using sequential assignment as defined in the file `callrouteA.def`

The two sequential assignment options are ways of simplifying work-item handling for agents. Use `Wrap Enabled = TRUE` when agents need time to do wrap-up work after releasing a work item.

If you choose not to use either approach, then multiple work items may be assigned to an agent at once, subject to each channel’s maximum number of simultaneous sessions.

Using the Wrap Enabled Parameter

When the Siebel Universal Queuing configuration parameter `Wrap Enabled` is set to `TRUE`, agent availability is affected as follows:

- An agent will receive only one work item at a time.
- After a work item is released, the agent’s availability is automatically set to not ready, for all channels handled by Siebel Universal Queuing.
- The Change Ready State button on the communications toolbar is enabled, and the agent must explicitly set availability to ready—for all channels or for individual channels—in order to receive a new work item. (While each work item is active, the agent’s state is busy.)
- The agent receives work items one at a time. Once the agent has accepted a work item, the routing engine will not route another work item until the agent finishes the current work item and sets availability to ready.

NOTE: For this approach, for each employee, the simultaneous sessions specified for each applicable channel must be greater than 0 (zero). For more information, see [“Simultaneous Sessions” on page 21](#).

Using Sequential Assignment as Defined in File `callrouteA.def`

This second approach to sequential assignment involves certain requirements for the communications configuration, which is specified in the Communications Administration screen.

In this case, Wrap Enabled can be either FALSE (the default) or TRUE, where agents are not required to change their availability state to ready after a call. After a work item is released, then, for all channels, an agent's availability is automatically set to ready (when Wrap Enabled = FALSE), or set to not ready (when Wrap Enabled = TRUE).

The Change Ready State button on the communications toolbar is enabled, but its channel-specific child buttons are disabled. The agent can manually set availability to ready, or not ready, for all channels at once.

NOTE: For this approach, for each employee, the simultaneous sessions specified for each applicable channel must be 1 (one). For more information, see [“Simultaneous Sessions” on page 21](#).

The following scenarios show how agent availability is affected by this second option for sequential assignment, whether or not you are *also* using the first option (Wrap Enabled = TRUE). Work items must be manually accepted by an agent. Siebel Universal Queuing routes a work item to the agent and places the agent in a not ready state for all channels. The following occurs:

- If the agent accepts the work item, the agent will not receive any more work items until the current work item is finished or released—all channels are blocked. Upon releasing the work item, the agent is set to a ready state for all channels and Siebel Universal Queuing can deliver the next work item to the agent—all channels are unblocked.

(The same is true when Wrap Enabled = TRUE, except that agent availability is set to not ready after the work item is released.)

- If the agent does not accept the work item (work item assignment timeout is reached), Siebel Universal Queuing sets the agent to not ready for all channels, and the work item is routed back to Siebel Universal Queuing. The agent must manually set availability to ready for all channels.

(The same is true when `Wrap Enabled = TRUE`. However, if you are not *also* using the second option for sequential assignment, agents can set availability to ready or not ready for all channels, or for individual channels.)

NOTE: The work item assignment timeout is defined by the parameter “workitemassignmenttimeout” in the files `vesp.imp` and `ds.fdd`. These files are located in the directory `install_dir/scomm/uq/etc`, where `install_dir` is the directory into which you installed the Siebel Universal Queuing routing engine. The default value of 600 seconds (10 minutes) can be modified by an administrator (the routing engine must be restarted for this to take effect). With a timeout value of 600 seconds, if an agent does not accept an incoming work item, after 10 minutes the routing engine will pull this work item back, set the agent’s availability to not ready, and reroute the work item.

Event and Command Definitions for Sequential Assignment

The implementation of the second option for sequential assignment, described in [“Using Sequential Assignment as Defined in File `callrouteA.def`” on page 74](#), is mostly handled through the Siebel Communications Server configuration. The communications definitions file `callrouteA.def`, from which event and command definitions can be imported, includes definitions that support sequential assignment.

For more information about importing configuration data from a file such as `callrouteA.def`, refer to *Siebel Communications Server Administration Guide*.

In order to use the second option for sequential assignment, you may need to change, or verify, your communications configuration. Selected communications events and commands in the communications definition file `callrouteA.def` are described in this section. It is important to understand how these definitions work so that you can modify them to meet your needs.

When the file `callrouteA.def` is prepared appropriately for your needs, you import the events and commands from this file into your communications configuration. (Alternatively, you may choose to use `multichannelA.def`, which supports Siebel Universal Queuing for the email channel—not the voice channel—but does *not* include event and command definitions that support sequential assignment.)

For more information about working with `.def` files, about communications events and commands, and about special events mentioned in this section, refer to *Siebel Communications Server Administration Guide*.

If you will import definitions from `callrouteA.def` and do *not* want to enable the second option for sequential assignment, do *both* of the following before you import definitions from the file:

- Uncomment the lines in “section A” of the file (thereby *enabling* the channel-specific child buttons for the Change Ready State toolbar button)
- Comment out the lines in “section B” of the file (thereby *disabling* the sequential assignment events and commands)

NOTE: When you are using the second method of implementing sequential assignment, but you do not want to route work items of all channels to all agents, then you must handle this in a special manner. For each applicable agent, you must change the simultaneous sessions setting to 0 for a channel to be dropped, as described in [“Simultaneous Sessions” on page 21](#). In addition, however, you must move all such agents to a separate communications configuration, which should support sequential assignment but should not support the dropped channel.

Example Events and Commands for Blocking and Unblocking Channels

The following example event and command definitions (from “section B” of callrouteA.def) support the second option for sequential assignment. These events and commands are for blocking and unblocking other applicable channels after an email work item has been started or released. Events and commands for blocking and unblocking other channels when the current work item is voice are also included in “section B” of callrouteA.def file.

NOTE: In the case of an email work item, blocking of other channels occurs when the work item has actually been started, based on the `@PreWorkItemStartedEvent` special event. In the case of a voice work item, however, the special event `@PreIndicateNewWorkItemEvent` is employed; blocking of other channels occurs whether or not the voice call has been answered.

The following event definitions are for blocking all other channels (that is, voice) after an email work item has been started.

```
[EventHandler:PreWorkItemStartedEvent_Email]
  DeviceEvent      = "@PreWorkItemStartedEvent"
  Response         = "PreWorkItemStartedEvent_Email"
  Filter.ChannelType = "Email"
  Order            = "1"

[EventResponse:PreWorkItemStartedEvent_Email]
  Command          = "BlockAllUQChannel_Except_Email"
```

The following command definitions are for blocking all other channels (that is, voice) after an email work item has been started.

```
[Command:BlockAllUQChannel_Except_Email]
  Hidden          = "TRUE"
  ExecuteAll      = "TRUE"
  SubCommand_2    = "CallUQAgentBusy_Voice"

[Command:CallUQAgentBusy_Voice]
  Hidden          = "TRUE"
  DeviceCommand   = "@UQBlockAgentChannel"
  FilterSpec      =
"$[GetCommandStatus(@UQAgentChangeReadyState(Voice))] =
'Enabled' OR
```

```
[$GetCommandStatus(@UQAgentChangeReadyState(Voice))] =  
'Checked'  
  CmdData          = "CallUQAgentBusy_Voice"  
  
[CmdData:CallUQAgentBusy_Voice]  
Param.MediaType    = "Voice"
```

The following event definitions are for unblocking all other channels (that is, voice) after an email work item has been released.

```
[EventHandler:WorkItemReleasedEvent_Email]  
  DeviceEvent = "@PreWorkItemReleasedEvent"  
  Response    = "WorkItemReleasedEvent_Email"  
  FilterSpec  = "[$GetWorkItemAttr(WorkItemID, IsRevoked)] =  
'FALSE'"  
  Filter.ChannelType = "Email"  
  Order        = "1"  
  
[EventResponse:WorkItemReleasedEvent_Email]  
Command        = "UnBlockAllUQChannel_Except_Email"
```

The following command definitions are for unblocking all other channels (that is, voice) after an email work item has been released.

```
[Command:UnBlockAllUQChannel_Except_Email]  
  Hidden      = "TRUE"  
  ExecuteAll  = "TRUE"  
  SubCommand_2 = "CallUQAgentAvailable_Voice"  
  
[Command:CallUQAgentAvailable_Voice]  
  Hidden      = "TRUE"  
  DeviceCommand = "@UQUnBlockAgentChannel"  
  FilterSpec   =  
"[$GetCommandStatus(@UQAgentChangeReadyState(Voice))] =  
'Enabled' OR  
[$GetCommandStatus(@UQAgentChangeReadyState(Voice))] =  
'Checked'"  
  CmdData      = "CallUQAgentAvailable_Voice"  
  
[CmdData:CallUQAgentAvailable_Voice]  
Param.MediaType = "Voice"
```

Configuring Session Timeout for EAI Object Manager

When a connection to the Siebel EAI Object Manager is idle for a period of time, the EAI Object Manager will disconnect the session. The Siebel Universal Queuing business service will not know that this session cannot be used. As a result, no work items will be delivered to agents, the Siebel Universal Queuing connection will have to be reset, and all agents will be logged out and will have to log back in.

To avoid this problem, a reasonable session timeout (in seconds) must be specified in the eapps.cfg file on the Web server. For example, if the eapps.cfg file reads:

```
[/eai]
ConnectString = connect_string
EnableExtServiceOnly = TRUE
```

Change the file to read:

```
[/eai]
SessionTimeout = 28800
ConnectString = connect_string
EnableExtServiceOnly = TRUE
```


Using Siebel Universal Queuing

3

This chapter describes how to define routes and escalations, and describes various operations that agents and administrators may perform to handle work items and manage the system.

You must define routes and escalations before you can deploy Siebel Universal Queuing.

Also refer to related Siebel documentation for your products, such as *Siebel Communications Server Administration Guide* and *Siebel eMail Response Administration Guide*.

Creating Routes and Escalations

Setting up Siebel Universal Queuing primarily involves defining routes that are used to direct work items to the appropriate agent for handling. When defining routes, you need to take into consideration the type of work item (channel), the characteristics of the work item (for example, is this a high-priority customer), and the best person to handle the work item (employee, skill, and competency).

Routing a work item in Siebel Universal Queuing is a two-step process:

- First, the work item is matched to a route based on selection criteria.
- Second, an appropriate agent is located to handle the work item based on a skill set defined in the selected route's escalation steps.

You define the routing rules that contain the business logic to accomplish these two steps.

NOTE: Escalation steps consider agent availability only for real-time work items.

Selection criteria are made up of simple to complex statements that Siebel Universal Queuing evaluates based on the properties of a work item. Generally, the more complex the statements, the better job Siebel Universal Queuing can do in assigning work items in accordance with your company's business rules.

For more information, see [“Defining Routes, Route Properties, and Escalation Rules” on page 84](#).

Escalation steps determine how a work item is going to be routed based on a set of skill definitions and wait times. Skill definitions are used to match a work item with an employee who holds the same skill definitions. Each route typically contains a series of escalation steps; each step becoming more liberal in the skill requirements, so that the last escalation step will include the largest pool of available employees. For more information, see [“Defining a Route Escalation” on page 91](#).

When a qualified employee for a work item is not available, the work item remains in the route until an employee becomes available. If the wait time for a route escalation is exceeded, the work item moves to the next escalation rule, usually with a more liberal set of employee skills. If the last escalation rule is reached, and the work item remains unassigned in the route longer than the wait time, an alarm is triggered and logged. For more information on alarms, see [“Viewing Alarms and Errors” on page 104](#).

Each channel should have a *catch-all* route defined so that any poorly defined work items will find a matching route. Otherwise, a work item may go through the routing engine without being routed. In this case, an alarm is sent to Siebel Server but the work item will not be processed.

Notifying Siebel Universal Queuing of Updates

Routing rules and escalations are loaded from the database when the Siebel Universal Queuing routing engine is started. When you make changes to routing rules and escalations, you might not want to have to restart the routing engine in order to load the new rules. The Notify UQ button on the Routes view in the UQ Administration screen allows you to reload the routing rules and escalations while the routing engine is running.

NOTE: Notify UQ does not reload the setting of the Non Real-Time flag for a route. This setting should not be changed for a route during runtime.

When you click Notify UQ, all routes, route properties, and escalations are reloaded, not just those you have changed.

Notify UQ is especially useful when you change the characteristics of an existing route or add a new route. You can also use Notify UQ after deleting a route; the route is deleted after the last work item is routed to an agent. Once a route is loaded (or reloaded) into the routing engine, the route remains until the next restart of the system.

Defining Routes, Route Properties, and Escalation Rules

Work items are handled according to business logic expressed as routing rules. A routing rule has these components:

- Route record
- Route properties, described in [“Adding Route Properties” on page 86](#)
- Route escalations and escalation rules, described in [“Defining a Route Escalation” on page 91](#)

A route is specific to a particular channel. However, a channel can have many routes. For example, an email channel could have a route for email messages directed to a technical support email address as well as a route for general email messages. However, each of these routes can only apply to a channel type of email.

When creating routes, follow these guidelines:

- Always include a general route for each channel type with the lowest priority setting. This general route will catch work items for the channel that do not match any other route for the channel.
- Always define the last escalation step for a route to include the entire pool of possible agents and define the wait time as zero. This will make sure that work items will always be assigned to an agent at some point in the route escalation.

Each route depends on the selection criteria defined in its route properties to evaluate work items for routing.

A route property is a set of key-value pair criteria, which are compared to the work item's data property key-value pairs. When a new work item is sent to Siebel Universal Queuing, the routes and route properties for the applicable channel type are searched to find a route whose properties match the work item. The first route for which selection criteria key-value pairs match the key-value pairs of the work item becomes the selected route for that work item.

Routes are selected only once—when the work item is introduced into the system. Every work item is associated with just one selected route.

Each route has a Priority field. Routes are searched for a matching selection rule in priority order, from highest to lowest integer value. The priority determines the order in which routes are matched to work items, and the order in which work items are assigned to agents. If work items in two or more routes match an agent's skill profile, the work item with the highest priority is routed to the agent first.

In the example above, where you have one email route for technical support and one email route for other inbound email messages, you might assign a priority of "10" to the technical support route and a priority of "2" to the general email route. An email addressed to support@yourcompany.com would actually match both routes. However, by setting the technical support route to a higher priority, this route will be matched to the email message first. The message will be routed to an agent who can handle technical support questions.

To create a route

- 1** From the application-level menu, choose View > Site Map > UQ Administration > Routes.

The Routes view appears.
- 2** Type the name for this route in the Name field.
- 3** Choose the channel type from the Channel Type drop-down list.
- 4** Select a priority for this route from the Priority drop-down list.

NOTE: The higher the priority number, the higher the priority.

- 5** Type the maximum number of work items you would like to see waiting in this route in the Capacity field.

The capacity for a route is an arbitrary number that you will use to gauge the activity level of a route. When the number of work items in a route at any given time exceeds the capacity you have set, an alarm is triggered and logged. If you frequently exceed the capacity of a route, you may want to evaluate the design of the routing rule logic to make sure it is meeting your needs.

- 6** Click the Active check box to make this route active.

- 7 Click the Non Real-Time check box to have work items for this route assigned to an employee regardless of the employee's availability.

Nonreal-time work items are assigned to an employee whether or not the employee is ready to accept work items. The work item will be placed into the appropriate queue for the employee, such as My Service Requests, My Activities, or My Communications.

CAUTION: Do not change the setting of the Non Real-Time check box in real-time.

- 8 Type the amount of time (in minutes) in the Service Level (mins) field.

The service level is the amount of time in which work items in this route are expected to be handled. This number is not used in the routing process but sets a target for monitoring performance. You can use decimals for values less than a minute—for example, 1.5 minutes equals one minute and thirty seconds.

- 9 Type the service level percentage in the Service Level Percentage field.

This is the percentage of work items that you want to have handled within the Service Level time.

- 10 Step off the record to save the new route.

Adding Route Properties

After you define a route, you add one or more property statements to the route. Route properties contain properties that match a work item to the channel for the route, and contain selection criteria, based on these properties, that match the work item to the specific route.

For example, an email channel with a channel property of RecipientAddress might be defined in a route as follows:

Property Name	RecipientAddress
Relation	=
Property Value	support@yourcompany.com

In the preceding example, email messages sent to support@yourcompany.com would match this route.

To add route properties

- 1 From the application-level menu, choose View > Site Map > UQ Administration > Routes.

The Routes view appears.

- 2 Select the route for which you are adding properties.
- 3 In the Properties list, add a new record.
- 4 Complete the route property fields shown in [Table 8](#).

Table 8. Route Property Fields

Field	Description
Begin Group	Optional. When multiple route properties are defined and joined to specify complex selection criteria, you may need to begin the definition of an individual route property with (or ((), as is appropriate for its role in the overall selection criteria defined by the joined individual route properties. You do not need to select a value for a route with only a single route property.
Property Name	Required. Choose one of the properties from the drop-down list. <i>Note:</i> The route properties you can specify here were initially defined as channel properties, in the Properties list of the Channels view.
Relation	Required. The valid relational operators are as follows: < less than < = less than or equal = equal to > greater than > = greater than or equal ~ wildcard match

Table 8. Route Property Fields

Field	Description
Property Value	The value match for this property. For example, ENU is the property value in the statement Language Code = “ENU”. The ~ wildcard match can be used with the following values: * – 0 or more characters ? – one single character . (period) – one or more occurrences of the previous character
End Group	Optional. When multiple route properties are defined and joined to specify complex selection criteria, you may need to end the definition of an individual route property with) or)) , as is appropriate for its role in the overall selection criteria defined by the joined individual route properties. You do not need to select a value for a route with only a single route property.
Join	Required for more than one property statement. The possible join values are <i>AND</i> and <i>OR</i> .
Sequence	Required. The sequence in which property statements are evaluated for this route. If only one statement is entered, the sequence is “1”.

Using Regular Expressions for Route Properties

A route property is evaluated using one of the standard relational operators. The operator = can be followed by a text string or a numeric value. The operators > , < , ≥ , and ≤ must be followed by a numeric value. A route property can also be defined by using a wildcard character (~) followed by a UNIX-style regular expression. The elements shown in [Table 9](#) can be used to build the expression.

Table 9. Regular Expression Elements for Route Properties

Regular Expression Element	Description and Example
^	Match any string at the beginning of the line. For example: A property value of ^650 selects any number with 650 as the first three digits.
+	Match one or more of the preceding characters. For example: A property value of ^6503 + selects numbers with the area code 650 and a prefix beginning with a 3. The value will also select numbers where the 650 series exists after the area code, such as 415-336-5033.

Table 9. Regular Expression Elements for Route Properties

Regular Expression Element	Description and Example
.	(period) One single character. For example: A property value of ^6503..... selects ten-digit phone numbers with the area code 650 and a prefix beginning with a 3. You must have a period in place of each of the remaining numbers.
*	Match zero or more occurrences of the preceding character. For example: A property value of ^6503* selects numbers with the area code 650, any prefix (zero or more occurrences of the character just before the *), and any number of characters after the 3.
?	Match zero or one occurrence of the preceding character. For example: A property value of ^6503? selects any phone number with an area code of 650, unless the prefix begins with the digit 3 repeated once (two instances).
[]	Match any value within the range between the brackets. For example: A property value of [A-Z][a-z] selects any capitalized word.
\$	Match any string at the end of a line. For example: A property value of 1234\$ selects any number that ends with “1234”.
?	Match zero or one occurrence of the preceding character. For example: A property value of ^6503? selects any phone number with an area code of 650, unless the prefix begins with the digit 3 repeated once (two instances).

Defining Multiple Route Properties

You can define multiple route properties for a given route to further refine the work items selected for the route. When you define more than one route property, you must specify a logical operator (AND or OR) for the Join field in order to *join* a route property to the next route property (next highest Sequence value).

- Use AND to indicate that both route properties must be met for a work item to match the route.
- Use OR to indicate that either of the route properties can be met for a work item to match the route.

When you have multiple route properties, you must also set the sequence in the Sequence field. The sequence number is an aid to help you insert and order route property expressions as you create and modify the route. When you sort the route properties by sequence number, you can see the order in which the route property expressions will be evaluated.

Route Property Syntax

The syntax for a route property is as follows:

```
property_name comparison_operator constant_string  
logical_operator sequence
```

or

```
property_name ~ regular_expression logical_operator sequence
```

The syntax defined above allows you to describe complex routing rules. Examples are shown below.

The following set of route properties (shown in sequence) matches a work item when the account number is at least 100,000 but less than 200,000 *or* the account number is at least 500,000 but less than 600,000, *and* where the requested product type is either Bond, Tbill, or Annuity:

```
(AcctNum >= "100000" &  
AcctNum < "200000") |  
(AcctNum >= "500000" &  
AcctNum < "600000") &  
(Product = "Bond" |  
Product = "Tbill" |  
Product = "Annuity")
```

The following set of route properties (shown in sequence) matches a work item when the account number is at least 100,000 but less than 200,000, *or* where the account number is at least 500,000 but less than 600,000 *and* where the requested product type is either Bond, Tbill, or Annuity:

```
(AcctNum >= "100000" &  
AcctNum < "200000") |  
((AcctNum >= "500000" &  
AcctNum < "600000") &
```

```
(Product = "Bond" |  
Product = "Tbill" |  
Product = "Annuity"))
```

Defining a Route Escalation

Once a route is selected for a work item based on its route properties, the escalation component of the rule determines how the work item is routed. Every route must have one or more escalation steps. Each escalation step consists of one or more skill requirements and a wait time.

Siebel Universal Queuing will attempt to find a suitable agent for the work item based on the first escalation step (or set of skill requirements). If a suitable agent cannot be found to handle the work item before the escalation step's wait time has elapsed, then the next escalation step will be evaluated. If you enter 0 as the wait time, the work item will remain in this escalation step until an agent becomes available.

When the wait time for the last escalation step in a route expires, a *warning* alarm is generated and logged. Therefore, the last escalation step should have skill requirements that are general enough to handle any work items for this route.

To create a route escalation

- 1 From the application-level menu, choose View > Site Map > UQ Administration > Routes.

The Routes view appears.

- 2 Select the route for which you are adding an escalation.
- 3 Click the Escalations view tab.

The Escalations list appears.

- 4 Type a name for the escalation in the Escalation Name field.
- 5 Type the number of minutes in the Time Out field.

This is the number of minutes to wait for an available agent. If no available agent is found within this time, the next escalation is applied.

- 6 Type a number in the Order field representing the order in which this escalation is to be applied.

NOTE: The order number specified for each escalation must be unique in order to guarantee that all escalations are applied in the intended sequence.

- 7 Create escalation rules, as described in [“Creating Route Escalation Rules” on page 92](#).

Creating Route Escalation Rules

This section describes how to create escalation rules and describes the syntax and fields for escalation rules. Escalation rules are based on skill definitions, which are described in [“Creating Skill Definitions” on page 94](#).

NOTE: Escalation rules do not need to be entered in the order of evaluation. However, entering the rules in the order in which you want them to execute will help you to visually understand the evaluation sequence. You can sort on the Sequence field afterwards, regardless of the order in which you created the rules.

To create an escalation rule

- 1 From the application-level menu, choose View > Site Map > UQ Administration > Routes.

The Routes view appears.
- 2 Select the route for which you are adding an escalation.
- 3 Click the Escalations view tab.
- 4 Select the escalation for which you are adding an escalation rule.
- 5 Add escalation rules to the route as follows:
 - a In the Escalation Rules view, add a new record.

The Escalation Rules form appears.
 - b Complete the escalation rule fields.

- 6 Click Notify UQ if you want to reload the routing rules without restarting Siebel Universal Queuing.

Otherwise, the new rules will take effect the next time Siebel Universal Queuing is started.

Route Escalation Rule Syntax

The syntax for an escalation rule is as follows:

```
skill_id = skill_value/expertise
```

where *skill_value* is either a constant string or a data property name.

The following example shows an escalation rule that looks for an agent who is expert in the product, or an agent who is intermediate in the product, but has had advanced training, or a *universal agent* who is also licensed in the customer's state.

This example uses data property substitution, where Product is the name of a data property.

```
(ProdSkill = "%Product%/3) |  
(ProdSkill = "%Product%/2 &  
TrainingLevel = "Advanced") |  
(ProdSkill = "Universal"/3 &  
License = "%state%")
```

Fields for Route Escalation Rules

Escalation rule fields are described in [Table 10](#).

Table 10. Escalation Rule Fields

Field	Comment
Begin Group	Optional. When multiple escalation rules are defined and joined to specify complex selection criteria, you may need to begin the definition of an individual escalation rule with (or ((, as is appropriate for its role in the overall selection criteria defined by the joined individual escalation rules. You do not need to select a value for a route with only a single escalation rule.
Skill Name	Required. Choose from the pop-up window.

Table 10. Escalation Rule Fields

Field	Comment
Skill Item	Required. Choose from the pop-up window or enter the name of a work item data property. The value of the data property will be used when the rule is evaluated.
Expertise	Required. Choose one of the following values from the drop-down list: ■ Novice ■ Intermediate ■ Expert If no expertise value is selected, a default value of Novice is used.
End Group	Optional. When multiple escalation rules are defined and joined to specify complex selection criteria, you may need to end the definition of an individual escalation rule with) or)), as is appropriate for its role in the overall selection criteria defined by the joined individual escalation rules. You do not need to select a value for a route with only a single escalation rule.
Join	Required for more than one rule statement. The possible join values are AND and OR.
Sequence	Required. The sequence in which escalation steps are evaluated for this route rule. If only one escalation step is entered, the sequence is 1. As you add new escalation steps, the sequence number is automatically assigned using the highest sequence number used plus one. For example, if you have sequence number 3, 6, and 8 already defined and you add a new step, the sequence number 9 is automatically assigned to the new step.

Creating Skill Definitions

An escalation rule consists of a set of skills that are required to handle this work item. A skill is defined by the skill name, a skill value, and a skill expertise level.

Skill names and values are defined by your Siebel administrator. These skill names and values are included as data properties for a work item. They are then used to match a work item with employees who have the same skill definition.

The skill names are defined as instances of the Skill:*skill_name* configuration parameter in the Configurations view in the UQ Administration screen. For more information, see [“Defining Configurations” on page 57](#) and [“Assigning Employee Skills” on page 67](#).

In many cases, each employee has already been assigned a set of skill definitions. For details, refer to *Applications Administration Guide*. However, you can also assign skill definitions for an employee through the UQ Administration screen. For more information, see [“Assigning Employee Skills” on page 67](#).

Skill values may be explicitly specified in the escalation step, or may be indirectly defined by specifying a work item data property name. If you substitute a skill value with a data property name enclosed in % characters, the value of that data property for a given work item will be used for the skill value. Enclosing the data property name in % characters triggers the data property substitution behavior.

For example, you could define a data property alternatively as Product = “Solaris” or as Product = “%system%”, where the value of the Product data property is not fixed but takes on the value of *system* from the work item. Using data property substitution allows you to use the route and escalation more flexibly, such as, as in this example, for more than one operating system.

To simplify the routing of a work item to a particular agent, a virtual agent skill called *AgentID* is automatically added to an agent’s skill profile when the agent logs on. The *AgentID* value is equal to the agent’s user ID with an expertise value of expert. This virtual agent skill can be used just as any other skill when escalation rules are defined.

You use the virtual agent skill in the same way you specify a skill value using a data property name. The skill ID is always *AgentID*. The skill value data property name can be anything as long as the value contained in the work item equals the agent’s user ID. For example, *AgentID* = “%cust_rep_ID%” would match a work item data property called *cust_rep_ID* where the value was the agent’s user ID.

Skill expertise levels are defined by your Siebel administrator. Each employee has been assigned an expertise level for each of their skill definitions. You can assign an expertise level of Novice, Intermediate, or Expert. If no expertise level is assigned, Novice is used as a default.

NOTE: Each sequential escalation step within a routing rule should relax the skill requirements, so that a larger number of agents will be eligible to handle the work item. The last escalation step of a routing rule should include as large a pool of agents as possible.

Editing a Route Definition in Real-Time

You can edit a route definition at any time by making the necessary changes using the Routes view in the UQ Administration screen. The changed route definition will take effect the next time the rules are loaded.

You can use the Notify UQ button on the Routes view to load the routing rules while the system is running. Using Notify UQ reloads all of the rules, not just those that you changed. You can also reload the rules by restarting the routing engine.

Inactivating a Route Definition

If you no longer need a route, it is advisable to inactivate the route rather than to delete it. Do not delete a route unless you understand the effect the deletion will have on the historical statistical data that has been logged.

To make a route definition inactive, uncheck the Active flag for the route in the Routes view of the UQ Administration screen.

After you inactivate, use the Notify UQ button. The change will take effect after the last applicable work item has been routed to an agent.

Receiving and Handling Work Items

Call center agents use the communications toolbar to log into Siebel Universal Queuing and to handle work items dispatched by the routing engine. The following list summarizes the functions related to work items that agents can perform from the communications toolbar.

- **Login.** Allows you to log into or out of a communications system, such as Siebel Universal Queuing. Agents should log into Siebel Universal Queuing only once per session.
- **Accept Work Item.** Allows you to accept an inbound voice call, an email message, or a work item of another channel type. When an inbound work item is routed to you, the Accept Work Item button blinks.
- **Release Work Item.** Allows you to release or disconnect the active work item.
- **Blind Transfer.** Allows you to perform a one-step transfer of a work item such as a voice call.
- **Consultative Transfer.** Allows you to initiate, and to complete, a two-step transfer of a voice call.
- **Pause Work Item.** Allows you to pause the active work item, such as to put a voice call on hold.
- **Work items list.** Allows you to select a paused work item on which to resume work.
- **Resume Work Item.** Allows you to resume work on a paused work item selected from the work items list.
- **Change Ready State.** Allows you to indicate that you are unavailable to accept work items (Not Ready state) or that you are available again (Ready state). Depending on your configuration, you can choose to change your ready state for all channels or for selected individual channels.

The communications toolbar and functions listed above are discussed in more detail in *Siebel Communications Server Administration Guide*.

In addition to the functions listed above, call center agents configured to use Siebel Universal Queuing can also use the following functions:

- **Transfer to Route.** Allows you to transfer a work item to a different route. For more information, see [“Transferring Work Items to Another Route” on page 98](#).
- **My Qualified Work Items.** Allows you to select from a list of work items waiting to be handled by an employee matching your skill qualifications. For more information, see [“Selecting Work Items from My Qualified Work Items View” on page 99](#).

Transferring Work Items to Another Route

In addition to transferring a work item to another call center agent, you can transfer an inappropriately routed work item to a route that can better handle the request. When you transfer a work item to another route, the selection criteria of the new route is bypassed and the work item is processed through the escalation steps as appropriate.

Transfer to route can also be used if an agent receives a work item because a more qualified agent was not available and the work item progressed through the escalation steps. In this case, if the work item could better be handled by a more qualified agent, the work item can be transferred back to the same route. However, if a more qualified agent is still not available, the work item could be reassigned to the transferring agent.

The routes to which you can transfer a work item are automatically generated based on the routes defined by the administrator.

The Transfer to Route command is accessed by using the Blind Transfer button on the communications toolbar. This button is configured, by default, to transfer work items to a route, in addition to performing other blind transfer operations. Alternatively, administrators can create a separate button on the communications toolbar, or configure a communications menu command, by which agents can access the Transfer to Route function.

Communications commands to transfer a work item to a route must specify the special command `@UQTransferWorkItemToRoute` as the device command.

For more information about special commands, command configuration, and communications toolbar and menu configuration, refer to *Siebel Communications Server Administration Guide*.

To transfer a work item to another route

- 1 Select the work item you want to transfer to another route.
- 2 From the communications toolbar, click Blind Transfer.

A list of routes appears.

- 3 Click the route to which you want to transfer the selected work item.

The work item is placed in the route specified and routed to the next available agent based on the escalation steps.

Selecting Work Items from My Qualified Work Items View

Agents have the option of selecting work items from a list of work items matching their skill set that are waiting to be handled. The agent uses the My Qualified Work Items view in the Communications screen for this purpose.

To select a work item

- 1 From the application-level menu, choose View > Site Map > Communications > My Qualified Work Items.

The My Qualified Work Items view appears.

- 2 Click the Change Ready State button on the communications toolbar to change availability to ready, if necessary.
- 3 Click Request Work Items to display the available work items.

A dialog box appears, prompting you for the number of work items for Siebel Universal Queuing to display.

- 4 Enter the number of work items you want to see and click OK.

NOTE: The number you specify here will be the maximum number of work items you can receive for *each channel*; normal limits on channel capacity may be overridden. For example, if you are enabled for the voice and email channels, and you specify to receive two work items, you may receive up to two work items of the voice channel *and* two work items of the email channel—even if the specified maximum for either of these channels is less than two.

If you do not enter a number, the default display in the My Qualified Work Items list in the Communications screen is up to 10 work items.

- 5 Select a work item you decide to work on and click Request Assignment.
- 6 Click Accept to accept the work item.

Routing Service Requests or Activities

The Route With UQ command allows a customer to have Siebel Universal Queuing route an open service request or unassigned activity to an agent with the appropriate skills. After the command is issued, the status of the record is changed and the service request or activity will be matched to a route and sent to Siebel Server for routing to the next available agent. Siebel Server changes the ownership of the record to the newly assigned agent.

Service request and activity work items are typically nonreal-time, and are accessed by the recipient agent in the My Service Requests view or My Activities view, as appropriate. No visual aid alerts the agent to the new work item, as with a real-time work item that arrives by way of the communications toolbar.

By default, only service requests with the Status field set to Open can be routed using Siebel Universal Queuing. After a service request has been sent to the routing engine, the status of the service request changes to Pending, and the Substatus field is set to Assigned.

By default, only activities with the Status field set to Unassigned can be routed using Siebel Universal Queuing. After an activity has been sent to the routing engine, the status of the activity changes to In Progress.

To route a service request or activity with Siebel Universal Queuing

- 1 From the application-level menu, choose View > Site Map > Service Requests, or choose View > Site Map > Activities.

The My Service Requests view, or the My Activities view, appears.

- 2 Click the More Info view tab.
- 3 In the More Info form, click the menu button, and then choose Route With UQ.

The service request or activity is routed by Siebel Universal Queuing to the next available agent with the appropriate skills to handle the work item.

Routing an Email Message as a Nonreal-Time Work Item

Email messages are normally routed in real-time, but you can alternatively configure communications events to allow agents to route them as nonreal-time work items—in the same manner that an agent can use the Route With UQ function to route a service request or an activity, as described earlier in this section.

To support this capability, define events like the following in the communications configuration:

```
[EventHandler:HandleNonRealTimeEmail]
  DeviceEvent = "@HandleNonRealTimeWorkItem"
  Filter.MediaType = "Email"
  Response = "HandleNonRealTimeEmail"
  Order = "55"

[EventResponse:HandleNonRealTimeEmail]
  QueryBusObj = "eMail Response"
  QueryBusComp = "Action"
  QuerySpec = "Id = '{ActivityID}'"
  SingleField.'Primary Owned By' = "{@UserName}"
```

The event response in this example sets the value of the “Primary Owned By” field for the email message’s activity record to the user name of the assigned agent.

For more information about communications events and about the `@HandleNonRealTimeWorkItem` special event, refer to *Siebel Communications Server Administration Guide*.

Abandoning a Phantom Work Item

If a system administrator determines that a given work item is a phantom and no longer corresponds to a real work item, the administrator can request that Siebel Universal Queuing abandon the work item.

For example, in some cases, a phone call may be abandoned on the phone switch, but may still exist in Siebel Universal Queuing. Such a work item may be assigned to an agent, but the agent may not be notified through the communications toolbar. After a timeout, the work item would then return to Siebel Universal Queuing, which puts the agent into auxwork mode and stops routing work items to the agent. The work item could later be reassigned all over again. Abandoning this phantom work item removes it from the queuing system.

For more information about alarms and errors, see [“Viewing Alarms and Errors” on page 104](#).

To abandon a phantom work item

- 1 From the application-level menu, choose View > Site Map > UQ Administration > Alarms and Errors.

The Alarms and Errors view appears.
- 2 In the Alarms and Errors list, query for work item records where the value of the Code field is “32.”
- 3 With such a phantom work item selected, click Abandon Work Item to abandon this work item.

Resetting the Siebel Universal Queuing Connection

When a system administrator determines that work items are waiting in the system but not being delivered to agents, the administrator can choose to reset the Siebel Universal Queuing connection to Siebel Server. Before choosing this option, the system administrator should make sure that the situation is systemwide and not just affecting a few agents.

The system administrator should also consider extending the SessionTimeout parameter for the Siebel EAI Object Manager. For more information, see [“Configuring Session Timeout for EAI Object Manager” on page 79](#).

For more information about alarms and errors, see [“Viewing Alarms and Errors” on page 104](#).

To reset the Siebel Universal Queuing connection

- 1** Ask your agents to finish all open work items and log out as quickly as possible.
- 2** From the application-level menu, choose View > Site Map > UQ Administration > Alarms and Errors.
- 3** In the Alarms and Errors list, click the menu button, and then choose UQ Connection Reset.
- 4** Ask your agents to log back in.

Resetting the Siebel Universal Queuing Agent Session

When the Siebel application is not responding to an agent's communications activity (such as when the agent cannot change ready state or log out), the agent should contact the system administrator for assistance in resolving the problem.

If the system administrator has determined that one of the following problems exist, the agent should reset the Universal Queuing session, as described below:

- Agent was unable to complete a work item.
- Agent was unable to accept a new work item or had no incoming work items.
- Agent was unable to change state to ready or not ready.
- Agent was unable to log in or log out.

To reset the Siebel Universal Queuing session (performed by agent)

- 1** Request assistance from the system administrator in determining the problem.
- 2** From the application-level menu, choose View > Communications > Reset > UQ Agent Reset.

The agent is logged out from Siebel Universal Queuing. All real-time work items associated with this agent are abandoned, such as voice calls. All nonreal-time work items associated with this agent are rerouted to the next available agent. The agent can now log back in.

- 3** Close the Web browser.
- 4** Restart the Siebel application and log in.

Viewing Alarms and Errors

Siebel Universal Queuing generates alarm and error messages and logs them to the database. Alarms and error messages can be viewed using the Alarms and Errors view in the UQ Administration screen. In addition, you can create workflow policies that monitor the messages and that email specific types of messages to a designated email account within your organization.

Alarms are classified using the following designations and criteria:

- **Informational.** Events requiring no action or intervention, such as reporting initialization progress.
- **Warning.** Events that require action, but not necessarily immediate action. There is no immediate degradation in system capabilities or performance. Examples include memory utilization hitting a predetermined threshold, or number of users approaching the system limits.
- **Critical.** Immediate action is required, and the system capability is degraded. An example is a missing required parameter on an API method, or inability to continue to write log information.
- **Emergency.** Immediate action is required, and the system may fail to perform in a useful manner. An example is the inability to connect to the database.

For more information about addressing error conditions, see [Chapter 6, “Troubleshooting Siebel Universal Queuing.”](#)

To view alarms and errors

- 1 From the application-level menu, choose View > Site Map > UQ Administration > Alarms and Errors.

The Alarms and Errors view appears, displaying all current alarm and error messages.

- 2 Click Query.

The Enter Query form appears.

- 3 Enter a value for one of the fields and click Go.

The data matching the value entered appears in the Alarms and Errors list.

Siebel Universal Queuing Reporting

4

This chapter describes the real-time and historical statistics that are provided by Siebel Universal Queuing. It also describes the Siebel Universal Queuing business objects and business components that must be referenced by any custom reporting implementation.

Viewing Real-Time Status Data

You can display real-time status data about channels, employees, and routes currently active in Siebel Universal Queuing.

This section describes how to display real-time status data for channels, employees, and routes. For information on historical data, see [“Viewing Historical Data” on page 110](#).

Setting the Refresh Interval

The refresh interval determines how often real-time statistics are gathered and logged. For example, if you set the refresh interval to 30 minutes, statistics are gathered every 30 minutes. When you click the Refresh button in the Channel Statistics or Route Statistics view, real-time statistics are displayed in 30-minute increments. The minimum refresh interval is one minute.

To set the refresh interval

- 1 From the application-level menu, choose View > Site Map > UQ Administration > Channel Statistics or Route Statistics.
- 2 Click Set Refresh Interval.
The Set Refresh Interval dialog box appears.
- 3 Type the number of minutes in which to gather the data and click OK.
The minimum value is one minute.

Viewing Channel Status Data

The Channel Statistics view displays the following for each channel type:

- The target and actual service level
- The average wait time and the longest wait time
- The total number of abandoned work items
- The total number of work items for a particular channel type

To view channel statistics data

- 1 From the application-level menu, choose View > Site Map > UQ Administration > Channel Statistics.

The Channel Statistics view appears.

- 2 Click Refresh to display the data.

NOTE: The data is not automatically refreshed when the view appears. You must click Refresh to display the data.

Viewing Employee Status Data

The Employee Statistics view comprises the following three lists:

- Employee Statistics
- Channel Summary (child list)
- Details (child list)

Viewing Channel Summary Statistics by Employee

The Channel Summary list displays the following statistics by channel for a selected employee:

- Log in and log out times.
- Average time it took to handle a work item.
- Number of work items handled.

To view channel summary statistics by employee

- 1 From the application-level menu, choose View > Site Map > UQ Administration > Employee Statistics.

The Employee Statistics view appears.

- 2 Select an employee in the Employee list.

The summary statistics by channel for the selected employee appear in the Channel Summary list.

Viewing Detailed Employee Statistics

The Details list displays the following statistics for a selected employee by channel:

- Start and end times
- Percentage of time the employee was idle
- Number of work items
- Total time spent working on work items
- Total wrap time
- Total number of times in not ready state

Employee details are not gathered automatically. You must start and stop the gathering of statistics, as described in the procedure below.

To view detailed employee statistics

- 1** From the application-level menu, choose View > Site Map > UQ Administration > Employee Statistics.
- 2** Click the Details tab.
- 3** Click Start Statistics to begin capturing data for this employee.
The Set Refresh Interval dialog box appears.
- 4** Type the number of minutes in which to gather the data and click OK.
The minimum value is one minute.
- 5** Click Refresh to display the statistics for this employee.
The statistics for this employee are displayed for each time interval that has elapsed since the last refresh.
- 6** Click Stop Statistics to stop capturing data for this employee.

Viewing Route Status Data

The Route Statistics view displays the following for each active route:

- The target and actual service level
- The average wait time, and the longest wait time
- The total number of abandoned work items
- The total number of work items currently in the route

NOTE: The actual service level will not display any data if no work items matched the route during an interval.

To view route statistics data

- 1** From the application-level menu, choose View > Site Map > UQ Administration > Route Statistics.

The Route Statistics view appears.

- 2** Click Refresh to update the displayed data.

Viewing Historical Data

Historical data that you can view includes data for work items and data for agents.

Siebel Universal Queuing maintains a journal of work items received and routed. The work item journal contains the following information for each work item:

- Work item ID
- Work item channel type
- Work item data properties
- Information about processing prior to delivery to an employee (one entry for each escalation step):
 - Routing rule ID, step number, start time, and end time
 - Information about each employee that handled this work item
 - Employee ID, start time, end time, state, user reason code

In addition, Siebel Universal Queuing creates an agent journal when an agent logs out. The agent journal summarizes an agent's performance for this login session. The agent journal contains the following information:

- Agent ID
- Login time, logout time, logout reason
- Number of times agent entered auxwork state, total auxwork time
- Information about agent work item handling performance (one entry for each channel type):
 - Channel ID
 - Number of work items completed,
 - Channel work time and wrap-up time

The information contained in the work item and agent journals is the basis for the historical statistics described in this section. The predefined historical statistics only displays a subset of the available data. You can specify additional statistical information for custom reports by using the business objects and business components defined in [“Business Objects and Business Components” on page 113](#).

Viewing Historical Channel Statistics

The Historical Channel Statistics view displays the following for each channel:

- The target and actual service level
- The average wait time, average abandon time, and the longest wait time
- The total number of abandoned work items
- The total number of work items for the channel

To view historical channel statistics

- 1** From the application-level menu, choose View > Site Map > UQ Administration > Historical Channel Statistics.

The Historical Channel Statistics view appears.

- 2** Click Enter Time Period.
- 3** Enter the date and time for the beginning of the period you want to view.
The date and time format is *mm/dd/yyyy hh:mm:ss am*.
- 4** Enter the for the end of the period you want to view and click OK.

The data requested is displayed in the Historical Channel Statistics view.

Viewing Historical Route Statistics

The Historical Route Statistics view displays the following for each route for a specified time period:

- The target and actual service level.
- The average abandon time, average wait time, and the longest wait time.
- The total number of abandoned work items.
- The total number of work items in the queue.

To view historical route statistics

- 1** From the application-level menu, choose View > Site Map > UQ Administration > Historical Route Statistics.

The Historical Route Statistics view appears.

- 2** Click Enter Time Period.

- 3** Enter the date and time for the beginning of the period you want to view.

The date and time format is *mm/dd/yyyy hh:mm:ss am*.

- 4** Enter the date and time for the end of the period you want to view and click OK.

The data requested is displayed in the Historical Route Statistics view.

Business Objects and Business Components

This section describes Siebel Universal Queuing business objects and business components and lists the fields in each business component. This information can help you to access work item and agent journal data for generating custom reports.

For more information on working with business objects and business components, refer to *Siebel Tools Reference* and *Siebel Tools Online Help*.

Siebel Universal Queuing Business Objects

[Table 11](#) lists the Siebel Universal Queuing business objects.

Table 11. Siebel Universal Queuing Business Objects

Business Object	Description	Business Components
UQ Alarms Errors	Use for alarm and error messages.	UQ Alarm Errors
UQ Employee Statistics	Use for employee related statistics.	UQ Agent Journal UQ Agent Journal Summary UQ Agent Media Statistics UQ Agent Statistics
UQ Media	Use to relate channel information, such as channel name, recoverability, service level, and service level percentage.	UQ Media
UQ Media Statistics	Use for both real-time and historical media statistics.	UQ Historical Media Statistics UQ Media Statistics(Reg)
UQ Routes	Use for both real-time and historical route statistics.	UQ Historical Route Statistics UQ Route Statistics(Reg) UQ Routes
UQ Work Items	Use for work item journal after completion of a work item.	UQ WorkItem Escalation History UQ WorkItem Properties UQ WorkItem State History UQ WorkItems

Siebel Universal Queuing Business Components

Table 12 lists the Siebel Universal Queuing business components. These business components are also referred to in Table 11 on page 113.

Table 12. Siebel Universal Queuing Business Components

Business Component	Description / Field	Field Description
UQ Agent Journal	Provides data from the agent journal captured when the agent logs out. This data includes information about the agent—for example, how long the agent was logged on, how long the agent was in aux mode, how long the agent was in available mode, and so on.	
	Auxiliary Seconds	Number of seconds agent was in not ready state.
	Auxiliary States	Number of times agent entered not ready state.
	Login Time	Time agent logged in.
	Logout Reason	Reason agent logged out.
	Logout Time	Time agent logged out.
	User ID	Agent’s user ID.

Table 12. Siebel Universal Queuing Business Components

Business Component	Description / Field	Field Description
UQ Agent Journal Summary	Provides information from the agent journal for each channel on which the agent was working.	
	Agent Journal ID	Foreign key to S_AGNT_JRNL table.
	Auxiliary Duration	Number of seconds agent was in not ready state.
	Auxiliary States	Number of times agent entered not ready state.
	Auxiliary Duration (mins)	Number of minutes agent was in not ready state.
	Average Handle Time (mins)	Average amount of time in minutes for each work item agent handled.
	Login Time	Login time of the agent.
	Logout Reason	Logout reason.
	Logout Time	Logout time of the agent.
	Media Type	Channel type.
	Media Type ID	Foreign key to S_CM_MEDIA table.
	Served Work Items	Total number of work items served.
	User ID	Foreign key to S_CONTACT table.
	Work Minutes	Time the agent actually worked on this channel, in minutes.
	Work Seconds	Time the agent actually worked on this channel, in seconds.
	Wrap Minutes	Time the user wraps this channel in minutes.
	Wrap Seconds	Time the user wraps this channel in seconds.

Table 12. Siebel Universal Queuing Business Components

Business Component	Description / Field	Field Description
UQ Agent Media Statistics	Provides channel information for Agent Statistics business component. Child of UQ Agent Statistics.	
	Agent Statistics ID	Foreign key to S_AGNT_JRNL table.
	Auxiliary Seconds	Number of seconds agent was in not ready state for this channel.
	Auxiliary States	Number of times agent entered not ready state for this channel.
	Auxiliary Time (mins)	Number of minutes agent was in not ready state for this channel.
	End Time	Logout time of the agent.
	Media Type	Channel type.
	Media Type ID	Foreign key to S_CM_MEDIA table.
	Served Work Items	Total number of work items served.
	Start Time	Login time of the agent.
	Time Interval	
	User ID	Foreign key to S_CONTACT table.
	Work Minutes	Time agent actually worked on this channel.
	Work Seconds	Time the agent actually worked on this channel.
	Wrap Minutes	Time the agent wraps this channel in minutes.
	Wrap Seconds	Time the agent wraps this channel in seconds.

Table 12. Siebel Universal Queuing Business Components

Business Component	Description / Field	Field Description
UQ Agent Statistics	Information provided by UQ HandleAgentStatistics. This is a real-time feeding of agent information and agent channel information. UQ Agent Media Statistics is a related business component.	
	Auxiliary Seconds	
	Auxiliary States	
	End Time	
	Start Time	
	User ID	Foreign key to S_CONTACT table.
UQ Alarms Errors	Shows all the alarms and errors.	
	Code	Error or alarm message code.
	Message	Message description.
	Name	Important information regarding the alarm or error, in the form of comma-delimited key-value pairs. The maximum text length for this field is 50.
	Severity	Severity of alarm.
	Start Time	
	Type	

Table 12. Siebel Universal Queuing Business Components

Business Component	Description / Field	Field Description
UQ Media	Shows all channel configurations including channel name, service level, and whether or not this channel type is failure-recoverable. Used together with UQ Media Statistics(Reg).	
	Current	Current
	Interactive	After a system failure, work items of interactive type (for example, voice calls) do not need to be recovered when the system is restarted.
	Media Type	Channel type.
	Raw Target Service Level	Service level in seconds.
	Service Level Percentage	Service level in percentage.
	Start Time	The time when the record is created.
	Target Service Level	Service level in seconds.
UQ Media Statistics(Reg)	Contains channel real-time statistics information.	
	Abandoned	
	Assigned Work Items	
	Average Wait Time	
	Comments	
	Delivered Work Items	
	End Time	
	Longest Wait Time	
	Media Type	
	Service Level Set	
	Service Level Workitems	
	Start Time	
	WorkItems	

Table 12. Siebel Universal Queuing Business Components

Business Component	Description / Field	Field Description
UQ Route Statistics(Reg)	Shows all the routing statistics.	
	Abandon	
	Assigned WorkItems	
	Average Handle Time	
	Average Wait Time	
	Comments	
	Delivered WorkItems	
	End Time	
	Longest Wait Time	
	Name	
	Service Level Set	
	Service Level WorkItems	
	Start Time	
	UQ Route ID	
	WorkItems	

Table 12. Siebel Universal Queuing Business Components

Business Component	Description / Field	Field Description
UQ Routes	Shows routes information. This information is used in UQ Route Statistics(Reg).	
	Capacity	
	Media Type	
	Name	
	Non Real-Time	
	Priority	
	Raw Target Service Level	
	Service Level Percentage	
	Target Service Level	
UQ WorkItem Escalation History	Provides the escalation history of a work item.	
	Escalation End Time	
	Escalation Result	
	Escalation Start Time	
	Escalation Step Name	
	UQ Route Name	
	Work Item ID	
UQ WorkItem Properties	Provides the data properties for a work item.	
	Name	
	Value	
	Work Item ID	

Table 12. Siebel Universal Queuing Business Components

Business Component	Description / Field	Field Description
UQ WorkItem State History	Provides the state history of a work item. For example, all the agents that worked on this work item.	
	Agent End Time	
	Agent Reason	
	Agent Start Time	
	Agent State	
	UQ Reason	
	User ID	Foreign key to S_CONTACT table.
	Work Item ID	Foreign key to S_UQ_WORK_ITEM table.
UQ WorkItems	The master work item. Each completed work item has an entry in this business component.	
	End Time	
	Media Type	
	Media Type ID	
	Row ID	
	Start Time	
	Work Item Name	

This chapter describes how to use the Universal Queuing business service to access functions in Siebel Universal Queuing.

Business services represent functionality that is encapsulated in a named service, for which methods can be called by the Siebel application. Many types of Siebel eBusiness Applications functionality, including Universal Queuing functionality, can be accessed as methods of Siebel-provided business services.

For more information about working with Siebel business services, refer to:

- *Siebel Communications Server Administration Guide*
- *Siebel Business Process Designer Administration Guide*
- *Siebel Tools Reference*
- *Siebel Tools Online Help*

Business Service Methods

This section describes the Siebel Universal Queueing business service methods available to interface with the Siebel Universal Queueing routing engine, and documents the return codes for these methods. The name of the business service is Universal Queueing. The methods are:

- [AddWorkItem on page 124](#)
- [CompleteWorkItem on page 126](#)
- [RequestAgentState on page 127](#)
- [RequestWorkItemState on page 128](#)

AddWorkItem

[Table 13](#) lists the arguments for the AddWorkItem method. This method adds the specified work item into Siebel Universal Queueing for routing.

Table 13. AddWorkItem Method Arguments

Argument Name	Display Name	Type	Required	Comment
WorkItemID	WorkItemID	Input	Y	The work item ID for the work item being added.
MediaType	MediaType	Input	Y	The channel type (such as voice, email, fax, and so on).
IsInteractive	IsInteractive	Input	Y	TRUE or FALSE.
IsScheduledTask	IsScheduledTask	Input	N	TRUE or FALSE. TRUE indicates this work item is scheduled to be routed during a particular time frame as specified in ScheduleStartTime and ScheduleEndTime. The work item will not be evaluated until at least the ScheduleStartTime.
ScheduleStartTime	ScheduleStartTime	Input	N	UTC time. Integer value in ASCII.
ScheduleEndTime	ScheduleEndTime	Input	N	UTC time. Integer value in ASCII.

Table 13. AddWorkItem Method Arguments

Argument Name	Display Name	Type	Required	Comment
WorkItemDataProperty	WorkItemDataProperty	Input	N	Other information in name and value pairs. This data property is a child data property set.
Return	Return	Output	Y	One of the return codes given in Table 17 on page 129 .

A data property set describes the work item. WorkItemDataProperty is a key-value pair data property that carries information to describe the work item itself. For example, an email work item data property could have the following:

```
Recipient = sales@company.com
Subject = NT
From = user@siebel.com
```

Normally, when an agent is assigned to a work item, the work item will be sent directly to an agent. If for any reason the work item is not to be routed to an agent, the SiebelLoginID and ClientKey is included in the work item data property.

When the routing engine detects these two pieces of information in the work item data property, the work item will be routed to the destination specified by SiebelLoginID and ClientKey using Server Request Broker key-based routing.

IsScheduledTask, ScheduleStartTime, and ScheduleEndTime are optional arguments that are used when the work item needs to be performed during a specified time period.

CompleteWorkItem

[Table 14](#) lists the arguments for the CompleteWorkItem method. This method tells Siebel Universal Queuing that the work item is completed. The next state for the agent will depend on the Auto-Wrap setting. If TRUE, both the agent and the work item will be in wrap mode. If FALSE, the agent returns to the ready state.

Table 14. CompleteWorkItem Method Arguments

Argument Name	Display Name	Type	Required	Comment
AgentLogin	AgentLogin	Input	Y	AgentID of the logged in agent. Used to dispatch work items to an agent.
WorkItemID	WorkItemID	Input	Y	The work item ID for the item the agent wants to complete.
Return	Return	Output	Y	One of the return codes given in Table 17 on page 129 .

RequestAgentState

[Table 15](#) lists the arguments for the RequestAgentState method. This method requests the routing engine to report the current agent state for the specified agent.

Table 15. RequestAgentState Method Arguments

Argument Name	Display Name	Type	Required	Comment
AgentLogin	AgentLogin	Input	Y	AgentID of the logged in agent. Used to dispatch work items to an agent.
AgentState	AgentState	Output	Y	One of the possible agent states: SUQ_AS_AUXWORK – Agent is in not ready state. Agent has no active work items and the routing engine will not dispatch work items to agent. SUQ_AS_AVAILABLE – Agent is ready to receive new work item but currently has no work items. SUQ_AS_BUSY – Agent is busy on one or more work items. SUQ_AS_INITAUXWORK – Initiating not ready mode. After all the work items are complete, the routing engine puts the agent in the not ready state. SUQ_AS_LOGGEDIN – Initial state when agent has just logged in and is not in an available state. SUQ_AS_LOGOUT – Agent is logged out. SUQ_AS_PICMODEAVAILABLE – Intermediate state between not ready and pick mode working states. SUQ_AS_PICMODEWORKING – Agent is working on a work item selected from My Qualified Work Items list.
Return	Return	Output	Y	One of the return codes given in Table 17 on page 129 .

RequestWorkItemState

[Table 16](#) lists the arguments for the RequestWorkItemState method. This method requests the current state of the specified work item.

Table 16. RequestWorkItemState Method Arguments

Argument Name	Display Name	Type	Required	Comment
WorkItemID	WorkItemID	Input	Y	The work item ID for which state is being requested.
WorkItemState	WorkItemState	Output	Y	One of the possible work item states: SUQ_WIS_ACTIVE – Work item is accepted by agent. SUQ_WIS_ALERTING – Work item is assigned to an agent but agent has not yet accepted work item. SUQ_WIS_COMPLETED – Work item is completed and ready to be removed from system. SUQ_WIS_ON_HOLD – Work item is suspended. For example, a call that is put on hold. SUQ_WIS_QUEUED – Work item is matched to a route and waiting for assignment to an agent. SUQ_WIS_RECEIVED – Work item was received by the routing engine but not yet matched to a route. SUQ_WIS_SCHEDULED – Work item is scheduled to be assigned later. SUQ_WIS_TXALERTING – Work item is in transfer alerting state. For example, agent 1 is transferring work item to agent 2 and has notified agent 2. For real-time work items only. SUQ_WIS_TXCONNECT – Work item is transferred to new agent. SUQ_WIS_TXDISCONNECT – Work item is suspended. For example, agent 1 is disconnected from agent 2 and agent 1 has not yet started working on work item again. SUQ_WIS_WRAP_UP – Work item is accepted by agent, completed, and agent is in wrap up state.
Return	Return	Output	Y	One of the return codes given in Table 17 on page 129 .

Return Codes for Business Service Methods

Table 17 gives the possible return codes for the Siebel Universal Queuing business service methods discussed in this chapter. Only the numeric value is returned.

Table 17. Business Service Return Codes

Return Code	Value
SUQ_SUCCESS	0
UQ_ERR_CONNECTION_NOT_FOUND	6
UQ_ERR_AGENT_NOT_FOUND	7
UQ_ERR_AGENT_BUSY	11
UQ_ERR_AGENT_STATE_NOT_VALID	12
UQ_ERR_AGENT_NOT_AVAILABLE	13
UQ_ERR_WORKITEM_NOT_FOUND	17
UQ_ERR_NOT_PRIMARY_UQ	30
UQ_ERR_WRONG_WORKITEM	51

Troubleshooting Siebel Universal Queuing

6

This chapter provides troubleshooting information for problems you may encounter while running the Siebel Universal Queuing routing engine.

Installation Issues

Table 18 gives a solution to an installation-related problem.

Table 18. Installation Issues

Symptom	Reason	Solution
No choices are available on the Database Configuration dialog box during installation on Microsoft Windows NT or Microsoft Windows 2000.	Database client is not installed.	Install the client tools for the appropriate database (Microsoft SQL Server, IBM DB2, or Oracle) to which you will be connecting.

Network Issues

Table 19 gives solutions to network-related problems.

Table 19. Network Issues

Symptom	Reason	Solution
Unable to communicate with Siebel Universal Queuing.	The machine where Siebel Universal Queuing is installed may not be accessible on the network.	Ping the machine by its name and by its IP address. If the machine does not respond to the ping, contact network administrators.
	The UQ connector process may not be running on the Siebel Universal Queuing machine.	Use netstat to check if the port (set during installation) is already in use. If the port is in use, try the following steps: ■ Reinstall the product with a port that is not in use. ■ Check if ORB servers (qntorbsvr, dssrv, armsrv, alertsrv) are running. If not, contact support. ■ Check if correct database instance was set during installation.

Table 19. Network Issues

Symptom	Reason	Solution
Unable to send events to EAI Object Manager.	The machine where EAI Object Manager is installed may not be accessible.	Ping the machine by its name and by its IP address. If the machine does not respond to the ping, contact network administrators.
	EAI Object Manager itself may not be running.	Try starting the server.
	Siebel Communications Server may not have sent valid configuration information for setting up connection with EAI Object Manager.	Make sure Siebel Communications Server is sending valid configuration information (for example, IP address, port, username or password) to Siebel Universal Queuing. Check Siebel Universal Queuing configuration for valid information.
	UQ connector process may not be running on the Siebel Universal Queuing machine.	Use netstat to check if the port (set during installation) is already in use. If the port is in use, try the following steps: ■ Reinstall the product with a port that is not in use. ■ Check if ORB servers (qntorbsvr, dssrv, armsrv, alertsrv) are running. If not, contact support. ■ Check if correct database instance was set during installation.
Web server is not receiving stat events.	Secondary connection may not be set up.	Make sure Siebel Communications Server has set up secondary connection for statistics.
	Configuration information sent may be wrong.	Make sure Siebel Communications Server is sending valid configuration information (for example, IP address, port, username or password) for the secondary connection to Siebel Universal Queuing. Check Siebel Universal Queuing configuration for valid information.

Application Issues

Table 20 gives a solution to an application-related problem.

Table 20. Application Issues

Symptom	Reason	Solution
SOAP requests related to agents and work items sent to Siebel Universal Queuing are failing.	One or more required servers (qatdsrv, adusrv, vdusr, dustore) may not be running.	Check if these processes are running. If not, collect log files and send to support for further investigation.

Index

Symbols

- @PreIndicateNewWorkItemEvent special event 77
- @PreWorkItemStartedEvent special event 77
- @UQTransferWorkItemToRoute special command 98

A

- Accept Work Item function, communications toolbar 18, 97
- activities, routing 100
- activity work items, effect of Status field on routing 100
- AddWorkItem method 124
- ADU server, role of 15
- adusrv process 49
- adusrv.exe process 47
- agent journal 110
- AgentID virtual skill 95
- agents
 - assignment of work items, overview 17
 - availability and escalation 82
 - availability management 25
 - communications toolbar functions 97
 - configuration procedure 71
 - employees, defined 20
 - login overview 23
 - resetting connection 103
 - sequential assignment 25
 - skill definitions and routing 94
 - system restart consideration 37
 - virtual agent skill 95
 - work item assignment, overview 18
 - work items, selecting 99

- work items, transferring 98
- Wrap Enabled parameter, effects of 73
- alarms
 - types of 22
 - viewing 104
- armsrv process 49
- armsrv.exe process 47
- audience for guide 7
- Automatic Call Distribution (ACD), implementation strategies 26
- Automatic Task Distributor (ATD) server, role of 15
- AuxWork After Login parameter 58

B

- Backup UQ Host Name parameter 58
- Backup UQ Host Port parameter 58
- Blind Transfer function, communications toolbar 97
- business components, for Siebel Universal Queuing 114
- business objects, for Siebel Universal Queuing 113
- business service, Universal Queuing
 - AddWorkItem method 124
 - CompleteWorkItem method 126
 - RequestAgentState method 127
 - RequestWorkItemState method 128
 - return codes 129

C

- callrouteA.def file 74
 - blocking and unblocking channels, sample events and commands 77
 - role in sequential assignment 75
 - technical overview 76

- Change Ready State function,
 - communications toolbar 73, 97
 - channel types
 - primary channel 65
 - universal queuing 19
 - channels
 - blocking and unblocking, sample events and commands 77
 - channel capacity, general overview 69
 - channel statistics by employee, viewing 107
 - channel statistics, viewing 106
 - defining 65
 - deleting channels, warning 65
 - historical channel statistics, viewing 111
 - modifying channels, warning 66
 - refresh interval, setting 106
 - routes, relation to 84
 - cherry picking 18
 - Communications Inbound Manager server component 27
 - Communications Session Manager server component 27
 - communications system
 - architecture diagram 15
 - overview, technical 14
 - work items, role of 17
 - communications toolbar, work item functions 97
 - CompleteWorkItem method 126
 - configuration
 - administration views for configuration 55
 - backup server 37
 - configuration, parameters, table of 58
 - creating a configuration 63
 - deleting a configuration 64
 - dual-server configuration 36
 - DUStore table, creating 45
 - editing a configuration 64
 - overview, general 19
 - primary configuration, role of 57
 - primary server 36
 - process overview 55
 - reconfiguring after installation 46
 - recovery table 37
 - Repair option 46
 - sequential assignment, implementation strategies 25
 - single-server configuration 35
 - UQConfigurationName parameter, role of 57
 - Wrap Enabled parameter 25
 - Connection Time Out parameter 59
 - Consultative Transfer function,
 - communications toolbar 97
 - Contact Record server, role of 15
- D**
- database installation
 - IBM DB2 database information 39
 - Microsoft SQL Server database information 38
 - Oracle database information 39
 - overview 38
 - Disconnect Retry Time parameter 59
 - dssrv process 49
 - dssrv.exe process 47
 - dual-server configuration
 - failover advantages 52
 - installation information 36
 - DUStore table
 - creating 45
 - role of 37
 - dustore.exe process 47
 - dustore_db2.sql script 46
 - dustore_mssql.sql script 46
 - dustore_oracle.sql script 46
 - dustoresrv process 49
- E**
- EAI Object Manager server component 27
 - email
 - request routing, data flow 31
 - routing, business scenario 11
 - sample work item data property 125

- employees
 - employee statistics, viewing 107
 - refresh interval, setting 106
 - role in Siebel Universal Queuing 20
- errors
 - viewing 104
- escalation. *See* route escalation rules

F

- failover process
 - Siebel Communications Server 53
 - Siebel Universal Queuing routing engine 52
- faxes, business scenario for routing 11

H

- heartbeat protocol 51
- HTTP Accept Header parameter 59
- HTTP Content Type parameter 59
- HTTP, use with routing engine 13
- HTTPLoginBodyTemplate parameter 59
- HTTPLogoutURLTemplate parameter 59
- HTTPURLTemplate parameter 60

I

- IBM DB2 database, installation
 - information 39
- installation
 - firewall considerations 34
 - Microsoft Windows, installing routing engine on 42
 - MS Windows, uninstalling routing engine 42
 - preinstallation checklist 41
 - reconfiguring after installation 46
 - server configurations, types of 34
 - server preparation 34
 - Siebel Server, installation sequence 34
 - starting UQ services 44
 - troubleshooting 132
 - UNIX, installing routing engine on 43
- installation, database

- IBM DB2 database 39
- Microsoft SQL Server database 38
- Oracle database 39
- overview 38
- IP address, default for routing engine 35

L

- login
 - agent login 23
 - Login function, communications toolbar 97
 - work item data properties for 125
- Logout From Available parameter 60

M

- MaxConnections parameter
 - described 60
 - and performance 14
- Microsoft SQL Server database, installation
 - information 38
- Microsoft Windows
 - routing engine process status, checking 48
 - routing engine services, listed 47
 - routing engine services, starting 48
 - routing engine, installing 42
 - routing engine, uninstalling 42
 - Siebel Universal Queuing, installing 42
 - Siebel Universal Queuing, uninstalling 42
- My Qualified Work Items function, communications toolbar 98

N

- network problems, troubleshooting 133
- nonreal-time work items
 - about assignment of 18
 - definition of 17
 - dispatch mechanism 100
 - email message routing 101
- Notify UQ button 83

O

Oracle database, installation
 information 39
orbsrv process 49
orbsrv.exe process 47
organization of guide 7

P

Pause Work Item function, communications
 toolbar 97
performance considerations 14
phantom work items, abandoning 102
Ping Interval parameter 51, 53, 60

Q

qatdsrv process 49
qatdsrv.exe process 47
qntinetd.exe process 47
qntorbsrv.exe process 47
quqconnector process 49
quqconnector.exe process 47

R

rc.net file 40
real-time work items, definition of 17
refresh interval, setting 106
Release Work Item function,
 communications toolbar 97
reloading queuing routes 83
RequestAgentState method 127
RequestWorkItemState method 128
Resume Work Item function,
 communications toolbar 97
route definition records
 creating 85
 editing in real-time 96
 overview 84
 rules (properties), adding 86
route escalation rules
 bypassing routing rules, about 98
 creating 91
 creating escalation rules 92

 escalation, explanation of 95
 functional overview 91
 overview, general 24, 82
 runtime reloading 83
 skill definitions, overview 94
 syntax 93
 work items, transferring 99
route properties. *See* routing rules
Route With UQ command 100
routes
 assignment to work items 84
 data property set, rerouting work
 items 125
 email messages in non-real time 101
 escalation rules, overview 82
 historical route statistics, viewing 111
 inactivating 96
 overview, general 21
 refresh interval, setting 106
 reloading in real-time 83
 route statistics, viewing 109
 routes, properties, and escalation rules,
 overview 84
 rules, overview 82
 work items, transferring 98, 99
routing email, business scenario 11
routing engine
 See also Siebel Universal Queuing
 architecture diagram 15
 callrouteA.def file 75
 communications protocol 13
 components of 13, 15
 default IP address 35
 location of 13
 Notify UQ button 83
 port allocation 35
 relation to Siebel Server 13
 reloading rules and escalations 83
 runtime reloading of rules 83
 sequential assignment 74
 SOAP port 35
 technical overview 14
 work items, role of 17

- routing engine, configuration
 - backup server, configuration 37
 - configuration parameters, table of 58
 - creating a configuration 63
 - deleting a configuration 64
 - dual-server configuration 36
 - editing a configuration 64
 - primary configuration, role of 57
 - primary server configuration 36
 - process overview 55
 - reconfiguring after installation 46
 - Repair option 46
 - single-server configuration 35
 - UQConfigurationName parameter, role of 57
 - routing engine, failover
 - process overview 52, 53
 - recovery table 37
 - recovery, technical overview 51
 - routing engine, installation
 - database installation, overview 38
 - IBM DB2 database 39
 - Microsoft SQL Server database 38
 - Microsoft Windows, installing on 42
 - MS Windows, uninstalling 42
 - Oracle database 39
 - preinstallation checklist 41
 - reconfiguring after installation 46
 - server configurations, types of 34
 - starting UQ services 44
 - UNIX, installing on 43
 - routing engine, services
 - MS Windows services, listed 47
 - process status, checking (MS Windows) 48
 - process status, checking (UNIX) 49
 - starting after installation 44
 - starting under Microsoft Windows 48
 - starting under UNIX 50
 - stopping under UNIX 50
 - UNIX services, listed 49
 - routing faxes, business scenario 11
 - routing rules
 - bypassing, about 98
 - components of 84
 - example 24
 - multiple property rules, defining 89
 - overview, functional 84
 - overview, general 12, 82
 - properties, adding 87
 - relational operators, use in 88
 - restart consideration 37
 - routing records, adding to 86
 - runtime reloading 83
 - syntax 90
 - routing voice calls, business scenario 11
- ## S
- SecondaryHTTPLoginBodyTemplate
 - parameter 61
 - SecondaryHTTPLogoutURLTemplate
 - parameter 61
 - SecondaryHTTPURLTemplate
 - parameter 61
 - sequential assignment
 - callrouteA.def file, role of 75
 - manually accepted work items 74
 - simultaneous sessions 70
 - work items and Wrap Enabled
 - parameter 73
 - service levels, specifying for channels 65
 - service requests
 - routing 100
 - service requests, effect of Status field on
 - routing 100
 - Siebel Communications Server
 - failover process 53
 - failure recovery 51
 - Siebel Universal Queuing, configuring to
 - work with 71
 - Siebel Universal Queuing, working
 - with 28
 - Siebel CTI and Siebel Universal
 - Queuing 28
 - Siebel EAI Object Manager
 - role in routing requests 14

- session timeout, configuring 79
- troubleshooting 134
- Siebel eMail Response and Siebel Universal Queuing 29
- Siebel Server
 - installation sequence, Siebel Universal Queuing 34
 - relation to routing engine 13
 - Siebel Universal Queuing, firewall considerations 34
 - Siebel Universal Queuing, resetting connection to 102
- Siebel Universal Queuing
 - advantages of 10
 - agent availability, management and assignment 25
 - agent login overview 23
 - alarms and errors, overview 104
 - API overview 14
 - business case for 10
 - business components, table of 114
 - business objects and business components, table of 113
 - business service methods 124
 - employees, role of 20
 - historical data, overview of 110
 - modules that work with 13
 - overview, general 12
 - restarting 37
 - route escalation rules, overview 24
 - Siebel Communications Server, configuring to work with 71
 - Siebel Communications Server, working with 28
 - Siebel CTI, working with 28
 - Siebel eMail Response, working with 29
 - Siebel Server, resetting connection to 102
 - troubleshooting 131
 - work item routing, overview 24
- Siebel Web server, role in routing requests 14
- Simple Object Access Protocol (SOAP)

- role of 14
- SOAP interface adapter, role of 15
- SOAP port 35
- troubleshooting 135
- simultaneous sessions
 - defining 70
 - overview, general 21
 - sequential assignment 70
- skill definitions
 - expertise levels and work item routing 95
 - overview 94
- Skill:*skill_name* parameter 62

T

- timeout, Siebel EAI Object Manager 79
- Trace FileName parameter 62
- Trace Level parameter 63
- Transfer to Route command 98
- Transfer to Route function, communications toolbar 98
- troubleshooting
 - network problems 132, 133
 - Siebel EAI Object Manager 134
 - Siebel Universal Queuing 131
 - SOAP requests 135
 - Web server 134

U

- Universal Queuing business service. *See* business service, Universal Queuing
- Universal Queuing. *See* Siebel Universal Queuing
- UNIX
 - routing engine process status, checking 49
 - routing engine services, listed 49
 - routing engine services, starting 50
 - routing engine services, stopping 50
 - routing engine, installing 43
 - Siebel Universal Queuing, installing 43
- UQ Administration screen and views 55

UQ Agent Journal business component 114
 UQ Agent Journal Summary business component 115
 UQ Agent Media Statistics business component 116
 UQ Agent Reset command 103
 UQ Agent Statistics business component 117
 UQ Alarms Errors business component 117
 UQ Alarms Errors business object 113
 UQ connector, role of 15
 UQ Employee Statistics business object 113
 UQ Engine - Data Service service 48
 UQ Engine - Orb Service service 48
 UQ Host Name parameter 63
 UQ Host Port parameter 63
 UQ Media business component 118
 UQ Media business object 113
 UQ Media Statistics business object 113
 UQ Media Statistics(Reg) business component 118
 UQ Route Statistics(Reg) business component 119
 UQ Routes business component 120
 UQ Routes business object 113
 UQ services. *See* routing engine, services
 UQ Work Items business object 113
 UQ WorkItem Escalation History business component 120
 UQ WorkItem Properties business component 120
 UQ WorkItem State History business component 121
 UQ WorkItems business component 121
 UQ_CFG_PARAM List of Values type 62
 UQConfigurationName parameter 57
 uqinstall.log file 45
 Use Resonate parameter 63

V

vdusrv process 49

vdusrv.exe process 47
 voice calls, routing
 business scenario 11
 data flow 30

W

Web server, troubleshooting 134
 work item journal 110
 work items
 AddWorkItem method and arguments 124
 agents selecting from 99
 assignment timeout parameter 75
 channel capacity, general overview 69
 channel, role of 20
 communications toolbar functions 97
 delivery methods 18
 escalations, overview 82
 manually accepted work items 74
 method for requesting state 128
 overview of 17
 phantom work items, abandoning 102
 restart consideration 37
 routing activities 100
 routing and skill expertise levels 95
 routing service requests 100
 routing, overview 24
 sample email data property 125
 simultaneous sessions 21
 transferring, overview 98
 WorkItemDataProperty argument 125
 Wrap Enabled parameter and work items 73
 wrap-up work, parameter for 73
 Work Items List function, communications toolbar 97
 work items, routing
 data property set for rerouting 125
 route assignment, functional overview 84
 route selection 84
 routes, overview 82
 routes, transferring 99
 routing rules, general overview 82

WorkItemDataProperty 125
Wrap Enabled parameter
 agent availability, role in 25
 described 63
 effect on agent workflow 73