

# Sun Ethernet Fabric Operating System

## RIPng Administration Guide



Part No.: E26512-02  
July 2012

Copyright © 2010, 2012, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related software documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT END USERS. Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

---

Copyright © 2010, 2012, Oracle et/ou ses affiliés. Tous droits réservés.

Ce logiciel et la documentation qui l'accompagne sont protégés par les lois sur la propriété intellectuelle. Ils sont concédés sous licence et soumis à des restrictions d'utilisation et de divulgation. Sauf disposition de votre contrat de licence ou de la loi, vous ne pouvez pas copier, reproduire, traduire, diffuser, modifier, breveter, transmettre, distribuer, exposer, exécuter, publier ou afficher le logiciel, même partiellement, sous quelque forme et par quelque procédé que ce soit. Par ailleurs, il est interdit de procéder à toute ingénierie inverse du logiciel, de le désassembler ou de le décompiler, excepté à des fins d'interopérabilité avec des logiciels tiers ou tel que prescrit par la loi.

Les informations fournies dans ce document sont susceptibles de modification sans préavis. Par ailleurs, Oracle Corporation ne garantit pas qu'elles soient exemptes d'erreurs et vous invite, le cas échéant, à lui en faire part par écrit.

Si ce logiciel, ou la documentation qui l'accompagne, est concédé sous licence au Gouvernement des Etats-Unis, ou à toute entité qui délivre la licence de ce logiciel ou l'utilise pour le compte du Gouvernement des Etats-Unis, la notice suivante s'applique :

U.S. GOVERNMENT END USERS. Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

Ce logiciel ou matériel a été développé pour un usage général dans le cadre d'applications de gestion des informations. Ce logiciel ou matériel n'est pas conçu ni n'est destiné à être utilisé dans des applications à risque, notamment dans des applications pouvant causer des dommages corporels. Si vous utilisez ce logiciel ou matériel dans le cadre d'applications dangereuses, il est de votre responsabilité de prendre toutes les mesures de secours, de sauvegarde, de redondance et autres mesures nécessaires à son utilisation dans des conditions optimales de sécurité. Oracle Corporation et ses affiliés déclinent toute responsabilité quant aux dommages causés par l'utilisation de ce logiciel ou matériel pour ce type d'applications.

Oracle et Java sont des marques déposées d'Oracle Corporation et/ou de ses affiliés. Tout autre nom mentionné peut correspondre à des marques appartenant à d'autres propriétaires qu'Oracle.

Intel et Intel Xeon sont des marques ou des marques déposées d'Intel Corporation. Toutes les marques SPARC sont utilisées sous licence et sont des marques ou des marques déposées de SPARC International, Inc. AMD, Opteron, le logo AMD et le logo AMD Opteron sont des marques ou des marques déposées d'Advanced Micro Devices. UNIX est une marque déposée d'The Open Group.

Ce logiciel ou matériel et la documentation qui l'accompagne peuvent fournir des informations ou des liens donnant accès à des contenus, des produits et des services émanant de tiers. Oracle Corporation et ses affiliés déclinent toute responsabilité ou garantie expresse quant aux contenus, produits ou services émanant de tiers. En aucun cas, Oracle Corporation et ses affiliés ne sauraient être tenus pour responsables des pertes subies, des coûts occasionnés ou des dommages causés par l'accès à des contenus, produits ou services tiers, ou à leur utilisation.



Adobe PostScript

# Contents

---

## **Using This Documentation 1**

- Product Notes 1
- Related Documentation 2
- Acronyms and Abbreviations 2
- CLI Command Modes 3
- Feedback 3
- Support and Accessibility 4

## **RIPng Overview 5**

- Protocol Description 5
- Configuring the RIPng Topology Example 5
  - RIPng Topology Example 6
    - ▼ Configure SEFOS1 6
    - ▼ Configure SEFOS2 9
    - ▼ Configure SEFOS3 11

## **General Configurations 13**

- Configuring IPv6 RIPng 13
  - ▼ Enable RIPng 13
  - ▼ Enable and Configure RIPng on Desired IPv6 Interfaces 14
- Configuring Redistribution 18
  - Redistribution Overview 19
    - ▼ Disable Redistribution 19

- ▼ Disable the split-horizon Option 21
- Configuring the Debug Level for RIPng 22
  - ▼ Enable Debugging 22
  - ▼ Disable RIPng Debugging 23

# Using This Documentation

---

This document describes a sample topology of STP on switches running SEFOS and includes examples of how to configure MSTP and RSTP.

- “Product Notes” on page 1
- “Related Documentation” on page 2
- “Acronyms and Abbreviations” on page 2
- “CLI Command Modes” on page 3
- “Feedback” on page 3
- “Support and Accessibility” on page 4

---

## Product Notes

For late-breaking information and known issues about the following products, refer to the product notes at:

Sun Blade 6000 Ethernet Switched NEM 24p 10GbE:

<http://www.oracle.com/pls/topic/lookup?ctx=SB6K-24p-10GbE>

Sun Network 10GbE Switch 72p:

<http://www.oracle.com/pls/topic/lookup?ctx=SN-10GbE-72p>

---

## Related Documentation

---

Documentation	Links
All Oracle products	<a href="http://oracle.com/documentation">http://oracle.com/documentation</a>
Sun Blade 6000 Ethernet Switched NEM 24p 10GbE	<a href="http://www.oracle.com/pls/topic/lookup?ctx=SB6K-24p-10GbE">http://www.oracle.com/pls/topic/lookup?ctx=SB6K-24p-10GbE</a>
Sun Network 10GbE Switch 72p	<a href="http://www.oracle.com/pls/topic/lookup?ctx=SN-10GbE-72p">http://www.oracle.com/pls/topic/lookup?ctx=SN-10GbE-72p</a>
Sun Blade 6000 modular system	<a href="http://www.oracle.com/pls/topic/lookup?ctx=sb6000">http://www.oracle.com/pls/topic/lookup?ctx=sb6000</a>
Oracle Integrated Lights Out Manager (Oracle ILOM) 3.0	<a href="http://www.oracle.com/pls/topic/lookup?ctx=ilom30">http://www.oracle.com/pls/topic/lookup?ctx=ilom30</a>

---

For detailed information about the commands and options described in this document, refer to the *Sun Ethernet Fabric Operating System CLI Base Reference Manual*.

---

## Acronyms and Abbreviations

---

Acronym or Abbreviation	Explanation
CLI	Command-line interface
IETF	Internet Engineering Task Force
IGP	Internet Gateway Protocol
Oracle ILOM	Oracle Integrated Lights Out Management
LAN	Local area network
NEM	Network Express Module
RIP	Routing Information Protocol
SEFOS	Sun Ethernet Fabric Operating System

---

---

# CLI Command Modes

The following table lists the configuration modes used in this document with their access and exit methods.

Command Mode	Access Method	Prompt	Exit Method
User EXEC	Access SEFOS from Oracle ILOM with read-only rights (privilege level 1).	SEFOS>	Use the <code>logout</code> or <code>exit</code> command to return to the Oracle ILOM prompt.
Privileged EXEC	Access SEFOS from Oracle ILOM with full administrative rights (privilege level 15).	SEFOS#	Use the <code>logout</code> or <code>exit</code> command to return to the Oracle ILOM prompt.
Global Configuration	From User EXEC mode, use the <code>enable</code> command.	SEFOS(config)#	Use the <code>end</code> command to return to Privileged EXEC mode.
Interface Configuration	From Global Configuration mode, use the <code>interface interface-type interface-id</code> command.	SEFOS(config-if)#	Use the <code>exit</code> command to return to Global Configuration mode, or use the <code>end</code> command to return to Privileged EXEC mode.

---

## Feedback

Provide feedback on this documentation at:

<http://www.oracle.com/goto/docfeedback>

---

# Support and Accessibility

---

Description	Links
Access electronic support through My Oracle Support	<a href="http://support.oracle.com">http://support.oracle.com</a>
Learn about Oracle's commitment to accessibility	For hearing impaired: <a href="http://www.oracle.com/accessibility/support.html">http://www.oracle.com/accessibility/support.html</a> <a href="http://www.oracle.com/us/corporate/accessibility/index.html">http://www.oracle.com/us/corporate/accessibility/index.html</a>

---



# RIPng Overview

---

This section describes the RIPng protocol and how to configure the example topology:

- “Protocol Description” on page 5
- “Configuring the RIPng Topology Example” on page 5

---

## Protocol Description

IPv6 RIPng functions similarly to RIP in IPv4, with various enhancements for IPv6. For more information about RIP and its features, refer to the following web sites:

<http://searchnetworking.techtarget.com/definition/Routing-Information-Protocol>[http://www.pulsewan.com/data101/rip\\_basics.htm](http://www.pulsewan.com/data101/rip_basics.htm)

---

## Configuring the RIPng Topology Example


This section describes a simple RIPng topology example and configuration. These configurations are examples and used for illustration purposes only. Variables such as interfaces, IP addresses, and others would be different based on your site topology and configuration.

- “RIPng Topology Example” on page 6
- “Configure SEFOS1” on page 6
- “Configure SEFOS2” on page 9
- “Configure SEFOS3” on page 11

# RIPng Topology Example

The following illustration shows a RIP topology in which the three switches are connected over multiple VLANs interfaces. Switch SEFOS1 has VLAN 30, 40, and 50 configured. Switch SEFOS 3 has VLAN 20 and 30 configured, and switch 2 has VLAN 40 and VLAN 10 configured.

Before configuring the switch to run IPv6 RIPng protocol, IPv6 unicast-routing must be enabled globally, and IPv6 must be enabled on any interface on which IPv6 RIPng is to be processed. This guide describes how to configure RIPng for IPv6 in SEFOS switches and provides configuration examples on the topology shown below.

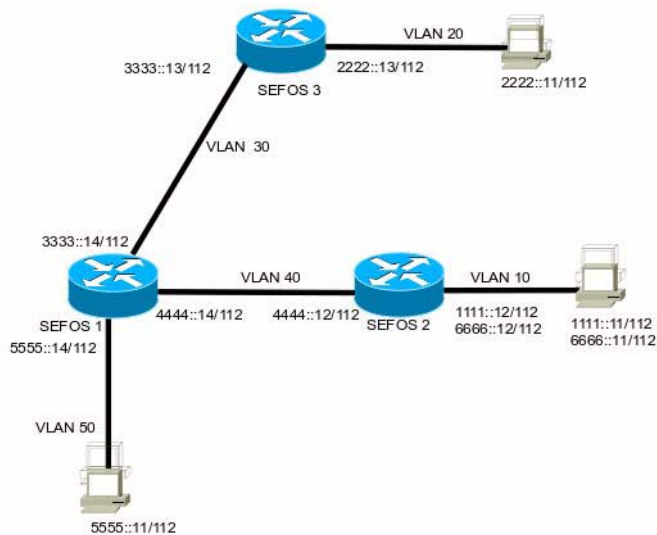

## ▼ Configure SEFOS1

Use the following commands to configure VLAN 50 and VLAN 40 on switch SEFOS1 in the example topology.

### 1. Configure SEFOS1.

```
SEFOS 1 SEFOS# configure terminal
SEFOS 1 SEFOS(config)# set gvrp disable
SEFOS 1 SEFOS(config)# set gmrp disable

SEFOS 1 SEFOS(config)# interface extreme-ethernet 0/15
SEFOS 1 SEFOS(config-if)# switchport access vlan 50
```

```

% Access VLAN does not exist.,Creating vlan
SEFOS 1 SEFOS(config-if)# exit

SEFOS 1 SEFOS(config)# interface vlan 50
SEFOS 1 SEFOS(config-if)# no shutdown
SEFOS 1 SEFOS(config-if)# ipv6 enable
SEFOS 1 SEFOS(config-if)# ipv6 address 5555::14 112
SEFOS 1 SEFOS(config-if)# exit

SEFOS 1 SEFOS(config)# vlan 40
SEFOS 1 SEFOS(config-vlan)# port extreme-ethernet 0/3
SEFOS 1 SEFOS(config-vlan)# exit

SEFOS 1 SEFOS(config)# interface extreme-ethernet 0/3
SEFOS 1 SEFOS(config-if)# no shut
SEFOS 1 SEFOS(config-if)# exit

SEFOS 1 SEFOS(config)# interface vlan 40
SEFOS 1 SEFOS(config-if)# no shut
SEFOS 1 SEFOS(config-if)# ipv6 enable
SEFOS 1 SEFOS(config-if)# ipv6 address 4444::14 112
SEFOS 1 SEFOS(config-if)# end

SEFOS 1 SEFOS# configure terminal
SEFOS 1 SEFOS(config)# vlan 30
SEFOS 1 SEFOS(config-vlan)# port extreme-ethernet 0/7
SEFOS 1 SEFOS(config-vlan)# exit

SEFOS 1 SEFOS(config)# interface extreme-ethernet 0/7
SEFOS 1 SEFOS(config-if)# no shut
SEFOS 1 SEFOS(config-if)# exit

SEFOS 1 SEFOS(config)# interface vlan 30
SEFOS 1 SEFOS(config-if)# no shut
SEFOS 1 SEFOS(config-if)# ipv6 enable
SEFOS 1 SEFOS(config-if)# ipv6 address 3333::14 112
SEFOS 1 SEFOS(config-if)# end
SEFOS 1 SEFOS#

```

## 2. Show the status of IPv6 interfaces on SEFOS1.

```

SEFOS 1 SEFOS# show ipv6 interface
vlan1 is up, line protocol is up
  IPv6 is Enabled
  Link local address:
    fe80::221:28ff:fe56:d7a9
  Global unicast address(es):
    Not Configured.

```

```

    Joined group address(es):
        ff02::1
        ff02::2
        ff02::1:ff56:d7a9
    MTU is 9216
    ICMP redirects are enabled
    ND DAD is enabled, Number of DAD attempts: 1
    ND router advertisement is disabled
vlan50 is up, line protocol is up
    IPv6 is Enabled
    Link local address:
        fe80::221:28ff:fe56:d7a9
    Global unicast address(es):
        5555::14/112
    Joined group address(es):
        ff02::1
        ff02::2
        ff02::1:ff00:14
        ff02::1:ff56:d7a9
    MTU is 9216
    ICMP redirects are enabled
    ND DAD is enabled, Number of DAD attempts: 1
    ND router advertisement is disabled
vlan40 is up, line protocol is up
    IPv6 is Enabled
    Link local address:
        fe80::221:28ff:fe56:d7a9
    Global unicast address(es):
        4444::14/112
    Joined group address(es):
        ff02::1
        ff02::2
        ff02::1:ff00:14
        ff02::1:ff56:d7a9
    MTU is 9216
    ICMP redirects are enabled
    ND DAD is enabled, Number of DAD attempts: 1
    ND router advertisement is disabled
vlan30 is up, line protocol is up
    IPv6 is Enabled
    Link local address:
        fe80::221:28ff:fe56:d7a9
    Global unicast address(es):
        3333::14/112
    Joined group address(es):
        ff02::1
        ff02::2
        ff02::1:ff00:14
        ff02::1:ff56:d7a9

```

```
MTU is 9216
ICMP redirects are enabled
ND DAD is enabled, Number of DAD attempts: 1
ND router advertisement is disabled
```

## ▼ Configure SEFOS2

Configure VLAN 10 and VLAN 40 interfaces on SEFOS2 in the example topology.

### 1. Configure SEFOS2.

```
SEFOS 2 SEFOS# configure terminal
SEFOS 2 SEFOS(config)# set gvrp disable
SEFOS 2 SEFOS(config)# set gmrp disable

SEFOS 2 SEFOS(config)# interface extreme-ethernet 0/15
SEFOS 2 SEFOS(config-if)# switchport access vlan 10
% Access VLAN does not exist.,Creating vlan
SEFOS 2 SEFOS(config-if)# exit

SEFOS 2 SEFOS(config)# interface vlan 10
SEFOS 2 SEFOS(config-if)# no shut
SEFOS 2 SEFOS(config-if)# ipv6 enable
SEFOS 2 SEFOS(config-if)# ipv6 address 1111::12 112
SEFOS 2 SEFOS(config-if)# exit

SEFOS 2 SEFOS(config)# interface vlan 40
SEFOS 2 SEFOS(config-if)# no shut
SEFOS 2 SEFOS(config-if)# ipv6 enable
SEFOS 2 SEFOS(config-if)# ipv6 address 4444::12 112
SEFOS 2 SEFOS(config-if)# exit

SEFOS 2 SEFOS(config)# vlan 40
SEFOS 2 SEFOS(config-vlan)# ports extreme-ethernet 0/3
SEFOS 2 SEFOS(config-vlan)# exit

SEFOS 2 SEFOS(config)# interface extreme-ethernet 0/3
SEFOS 2 SEFOS(config-if)# no shut
SEFOS 2 SEFOS(config-if)# end
```

### 2. Show the status of IPv6 interfaces on SEFOS2.

```
SEFOS 2 SEFOS# show ipv6 interface
vlan1 is up, line protocol is up
  IPv6 is Enabled
  Link local address:
```

```

        fe80::214:4fff:fe6c:630f
Global unicast address(es):
    Not Configured.
Joined group address(es):
    ff02::1
    ff02::2
    ff02::1:ff6c:630f
MTU is 9216
ICMP redirects are enabled
ND DAD is enabled, Number of DAD attempts: 1
ND router advertisement is disabled
vlan40 is up, line protocol is up
IPv6 is Enabled
Link local address:
    fe80::214:4fff:fe6c:630f
Global unicast address(es):
    4444::12/112
Joined group address(es):
    ff02::1
    ff02::2
    ff02::9
    ff02::1:ff00:12
    ff02::1:ff6c:630f
MTU is 9216
ICMP redirects are enabled
ND DAD is enabled, Number of DAD attempts: 1
ND router advertisement is disabled
vlan10 is up, line protocol is up
IPv6 is Enabled
Link local address:
    fe80::214:4fff:fe6c:630f
Global unicast address(es):
    1111::12/112
    6666::12/112
Joined group address(es):
    ff02::1
    ff02::2
    ff02::9
    ff02::1:ff00:12
    ff02::1:ff6c:630f
MTU is 9216
ICMP redirects are enabled
ND DAD is enabled, Number of DAD attempts: 1
ND router advertisement is disabled

```

## ▼ Configure SEFOS3

Use the following commands to configure VLAN 20 and VLAN 30 on SEFOS3 in the example topology.

### 1. Configure SEFOS3.

```
SEFOS 3 SEFOS# configure terminal
SEFOS 3 SEFOS(config)# set gvrp disable
SEFOS 3 SEFOS(config)# set gmrp disable

SEFOS 3 SEFOS(config)# interface extreme-ethernet 0/65
SEFOS 3 SEFOS(config-if)# no shutdown
SEFOS 3 SEFOS(config-if)# switchport access vlan 20
% Access VLAN does not exist.,Creating vlan
SEFOS 3 SEFOS(config-if)# exit

SEFOS 3 SEFOS(config)# interface vlan 20
SEFOS 3 SEFOS(config-if)# no shutdown
SEFOS 3 SEFOS(config-if)# ipv6 enable
SEFOS 3 SEFOS(config-if)# ipv6 address 2222::13 112
SEFOS 3 SEFOS(config-if)# exit

SEFOS 3 SEFOS(config)# vlan 30
SEFOS 3 SEFOS(config-vlan)# port extreme-ethernet 0/1
SEFOS 3 SEFOS(config-vlan)# exit

SEFOS 3 SEFOS(config)# interface extreme-ethernet 0/1
SEFOS 3 SEFOS(config-if)# no shutdown
SEFOS 3 SEFOS(config-if)# exit

SEFOS 3 SEFOS(config)# interface vlan 30
SEFOS 3 SEFOS(config-if)# no shutdown
SEFOS 3 SEFOS(config-if)# ipv6 enable
SEFOS 3 SEFOS(config-if)# ipv6 address 3333::13 112
SEFOS 3 SEFOS(config-if)# end
```

### 2. Show the status of the IPv6 interface on SEFOS3.

```
SEFOS 3 SEFOS# show ipv6 interface
vlan1 is up, line protocol is up
  IPv6 is Enabled
  Link local address:
    fe80::214:4fff:fe6c:686d
  Global unicast address(es):
    Not Configured.
  Joined group address(es):
```

```
ff02::1
ff02::2
ff02::1:ff6c:686d
MTU is 9216
ICMP redirects are enabled
ND DAD is enabled, Number of DAD attempts: 1
ND router advertisement is disabled
vlan20 is up, line protocol is up
IPv6 is Enabled
Link local address:
    fe80::214:4fff:fe6c:686d
Global unicast address(es):
    2222::13/112
Joined group address(es):
    ff02::1
    ff02::2
    ff02::9
    ff02::1:ff00:13
    ff02::1:ff6c:686d
MTU is 9216
ICMP redirects are enabled
ND DAD is enabled, Number of DAD attempts: 1
ND router advertisement is disabled
vlan30 is up, line protocol is up
IPv6 is Enabled
Link local address:
    fe80::214:4fff:fe6c:686d
Global unicast address(es):
    3333::13/112
Joined group address(es):
    ff02::1
    ff02::2
    ff02::9
    ff02::1:ff00:13
    ff02::1:ff6c:686d
MTU is 9216
ICMP redirects are enabled
ND DAD is enabled, Number of DAD attempts: 1
ND router advertisement is disabled

SEFOS 3 SEFOS#
```



# General Configurations

---

This section contains procedures for configuring RIPng in SEFOS switches. See [“RIPng Topology Example” on page 6](#) for descriptions of the topologies that are referenced in the procedures. Before you can configure RIPng, you must perform the basic IPv6 configuration in your environment in similar fashion as described in [“Configuring the RIPng Topology Example” on page 5](#).

- [“Configuring IPv6 RIPng” on page 13](#)
- [“Configuring Redistribution” on page 18](#)
- [“Configuring the Debug Level for RIPng” on page 22](#)

---

## Configuring IPv6 RIPng

Follow these steps to configure IPv6 RIPng on each switch:

1. Enable IPv6 unicast routing globally.
2. Enable IPv6 RIPng routing globally.
3. Enable RIPng routing on the desired interfaces.
  - [“Enable RIPng” on page 13](#)
  - [“Enable and Configure RIPng on Desired IPv6 Interfaces” on page 14](#)

### ▼ Enable RIPng

1. **On the switch, enable IPv6 unicast routing.**

```
SEFOS 2 SEFOS# configure terminal  
SEFOS 2 SEFOS(config)# ipv6 unicast-routing
```

## 2. Enable RIPng and route redistribution.

```
SEFOS 2 SEFOS(config)# ipv6 router rip  
SEFOS 2 SEFOS(config-router)# redistribute connected  
SEFOS 2 SEFOS(config-router)# end  
SEFOS 2 SEFOS#
```

## ▼ Enable and Configure RIPng on Desired IPv6 Interfaces

### 1. Enable RIPng on the interfaces on SEFOS1.

```
SEFOS 1 SEFOS# configure terminal  
SEFOS 1 SEFOS(config)# interface vlan 30  
SEFOS 1 SEFOS(config-if)# ipv6 rip enable  
SEFOS 1 SEFOS(config-if)# exit  
  
SEFOS 1 SEFOS(config)# interface vlan 40  
SEFOS 1 SEFOS(config-if)# ipv6 rip enable  
SEFOS 1 SEFOS(config-if)# exit  
  
SEFOS 1 SEFOS(config)# interface vlan 50  
SEFOS 1 SEFOS(config-if)# ipv6 rip enable  
SEFOS 1 SEFOS(config-if)#
```

### 2. Enable RIPng on the interfaces on SEFOS2.

```
SEFOS 2 SEFOS# configure terminal  
SEFOS 2 SEFOS(config)# interface vlan 10  
SEFOS 2 SEFOS(config-if)# ipv6 rip enable  
SEFOS 2 SEFOS(config-if)# exit  
  
SEFOS 2 SEFOS(config)# interface vlan 40  
SEFOS 2 SEFOS(config-if)# ipv6 rip enable  
SEFOS 2 SEFOS(config-if)# exit
```

### 3. Enable RIPng on the interfaces on SEFOS3.

```
SEFOS 3 SEFOS# configure terminal  
SEFOS 3 SEFOS(config)# interface vlan 20  
SEFOS 3 SEFOS(config-if)# ipv6 rip enable  
SEFOS 3 SEFOS(config-if)# exit
```

```
SEFOS 3 SEFOS(config)# interface vlan 30
SEFOS 3 SEFOS(config-if)# ipv6 rip enable
SEFOS 3 SEFOS(config-if)# exit
```

#### 4. Review the RIPng status on SEFOS1.

```
SEFOS 1 SEFOS# show ipv6 rip
RIP port 521, multicast-group ff02::9,Maximum paths is 16
Updates every 30 seconds; expire after 180
SEFOS 1 SEFOS# show ipv6 rip database
Garbage Collect after 120 seconds
RIP local RIB
1111::/112, metric 2, ripng
    vlan40/fe80::214:4fff:fe6c:630f, expires in 180 secs
2222::/112, metric 2, ripng
    vlan30/fe80::214:4fff:fe6c:686d, expires in 180 secs
3333::/112, metric 2, ripng
    vlan30/fe80::214:4fff:fe6c:686d, expires in 180 secs
3333::/112, metric 1, local
    vlan30/::, expires in 180 secs
4444::/112, metric 2, ripng
    vlan40/fe80::214:4fff:fe6c:630f, expires in 180 secs
4444::/112, metric 1, local
    vlan40/::, expires in 180 secs
5555::/112, metric 1, local
    vlan50/::, expires in 180 secs
6666::/112, metric 2, ripng
    vlan40/fe80::214:4fff:fe6c:630f, expires in 180 secs
Poison Reverse is on
Interface:
vlan50
vlan40
vlan30
Redistribution:
Connected,Routes Redistribution is enabled.
```

```
SEFOS 1 SEFOS# show ipv6 route
IPv6 Routing Table - 8 entries
Codes : C - Connected, S - Static
SEFOS 1 SEFOS# show ipv6 route summary
O - OSPF, R - RIP, B - BGP
IPv6 Routing Table Summary - 8 entries
    3 Connected, 0 Static, 5 RIP, 0 BGP, 0 OSPF
Number of prefixes:
    /112: 8
R 1111::/112 [2/120]
```

```
via fe80::214:4fff:fe6c:630f, vlan40
R 2222::/112 [2/120]
via fe80::214:4fff:fe6c:686d, vlan30
C 3333::/112 [1/1]
via ::, vlan30
R 3333::/112 [2/120]
via fe80::214:4fff:fe6c:686d, vlan30
C 4444::/112 [1/1]
via ::, vlan40
R 4444::/112 [2/120]
via fe80::214:4fff:fe6c:630f, vlan40
C 5555::/112 [1/1]
via ::, vlan50
R 6666::/112 [2/120]
via fe80::214:4fff:fe6c:630f, vlan40
```

## 5. Review the RIP route on SEFOS2.

```
SEFOS 2 SEFOS# show ipv6 rip
RIP port 521, multicast-group ff02::9,Maximum paths is 16
Updates every 30 seconds; expire after 180
SEFOS 2 SEFOS# show ipv6 rip database
Garbage Collect after 120 seconds
RIP local RIB
1111::/112, metric 1, local
    vlan10/::, expires in 180 secs
2222::/112, metric 3, ripng
    vlan40/fe80::221:28ff:fe56:d7a9, expires in 180 secs
3333::/112, metric 2, ripng
    vlan40/fe80::221:28ff:fe56:d7a9, expires in 180 secs
4444::/112, metric 1, local
    vlan40/::, expires in 180 secs
5555::/112, metric 2, ripng
    vlan40/fe80::221:28ff:fe56:d7a9, expires in 180 secs
6666::/112, metric 1, local
    vlan10/::, expires in 180 secs
Poison Reverse is on
Interface:
vlan40
vlan10
Redistribution:
Connected,Routes Redistribution is enabled.
```

```

SEFOS 2 SEFOS# show ipv6 route
IPv6 Routing Table - 6 entries
Codes : C - Connected, S - Static
SEFOS 2 SEFOS# show ipv6 route summary
O - OSPF, R - RIP, B - BGP
IPv6 Routing Table Summary - 6 entries
    3 Connected, 0 Static, 3 RIP, 0 BGP, 0 OSPF
    Number of prefixes:
    /112: 6
C 1111::/112 [1/1]
via ::, vlan10
R 2222::/112 [3/120]
via fe80::221:28ff:fe56:d7a9, vlan40
R 3333::/112 [2/120]
via fe80::221:28ff:fe56:d7a9, vlan40
C 4444::/112 [1/1]
via ::, vlan40
R 5555::/112 [2/120]
via fe80::221:28ff:fe56:d7a9, vlan40
C 6666::/112 [1/1]
via ::, vlan10

```

## 6. Review the RIP route on SEFOS3.

```

SEFOS 3 SEFOS# show ipv6 rip
RIP port 521, multicast-group ff02::9,Maximum paths is 16
Updates every 30 seconds; expire after 180
SEFOS 3 SEFOS# show ipv6 rip database
Garbage Collect after 120 seconds
RIP local RIB
1111::/112, metric 3, ripng
    vlan30/fe80::221:28ff:fe56:d7a9, expires in 180 secs
2222::/112, metric 1, local
    vlan20/::, expires in 180 secs
3333::/112, metric 2, ripng
    vlan30/fe80::221:28ff:fe56:d7a9, expires in 180 secs
3333::/112, metric 1, local
    vlan30/::, expires in 180 secs
4444::/112, metric 2, ripng
    vlan30/fe80::221:28ff:fe56:d7a9, expires in 180 secs
5555::/112, metric 2, ripng
    vlan30/fe80::221:28ff:fe56:d7a9, expires in 180 secs
6666::/112, metric 3, ripng
    vlan30/fe80::221:28ff:fe56:d7a9, expires in 180 secs
Poison Reverse is on
Interface:

```

```
vlan20
vlan30
Redistribution:
Connected,Routes Redistribution is enabled.
```

```
SEFOS 3 SEFOS# show ipv6 route
IPv6 Routing Table - 7 entries
Codes : C - Connected, S - Static
SEFOS 3 SEFOS# show ipv6 route summary
O - OSPF, R - RIP, B - BGP
IPv6 Routing Table Summary - 7 entries
    2 Connected, 0 Static, 5 RIP, 0 BGP, 0 OSPF
Number of prefixes:
/112: 7
R 1111::/112 [3/120]
via fe80::221:28ff:fe56:d7a9, vlan30
C 2222::/112 [1/1]
via ::, vlan20
C 3333::/112 [1/1]
via ::, vlan30
R 3333::/112 [2/120]
via fe80::221:28ff:fe56:d7a9, vlan30
R 4444::/112 [2/120]
via fe80::221:28ff:fe56:d7a9, vlan30
R 5555::/112 [2/120]
via fe80::221:28ff:fe56:d7a9, vlan30
R 6666::/112 [3/120]
via fe80::221:28ff:fe56:d7a9, vlan30
```

---

## Configuring Redistribution

- [“Redistribution Overview” on page 19](#)
- [“Disable Redistribution” on page 19](#)
- [“Disable the split-horizon Option” on page 21](#)

# Redistribution Overview

Redistribution is enabled by default when RIPng is enabled. You can disable or change redistribution status, allowing more control of distributing IPv6 routes. Available options are static, connected and OSPF routes, and metrics. The following example shows a configuration with the default redistribution values.

```
SEFOS 1 SEFOS# show ipv6 rip
RIP port 521, multicast-group ff02::9,Maximum paths is 16
Updates every 30 seconds; expire after 180
Garbage Collect after 120 seconds
Poison Reverse is on
Interface:
vlan40
vlan10
Redistribution:
Connected, Routes Redistribution is enabled.
```

## ▼ Disable Redistribution

The following example disables the redistribution of directly connected routes (5555::0) on SEFOS1. With redistribution disabled, the route to 5555::0 is not visible on switches SEFOS2 and SEFOS3.

### 1. On SEFOS2, review the route information before disabling redistribution.

```
SEFOS 2 SEFOS# show ipv6 route

IPv6 Routing Table - 6 entries
Codes : C - Connected, S - Static
        O - OSPF, R - RIP, B - BGP
C   1111::/112   [1/1]
        via ::, vlan10
R   2222::/112   [3/120]
        via fe80::221:28ff:fe56:d7a9, vlan40
R   3333::/112   [2/120]
        via fe80::221:28ff:fe56:d7a9, vlan40
C   4444::/112   [1/1]
        via ::, vlan40
R   5555::/112   [2/120]
        via fe80::221:28ff:fe56:d7a9, vlan40
C   6666::/112   [1/1]
        via ::, vlan10
```

## 2. On SEFOS3, review the route information before disabling redistribution.

```
SEFOS 3 SEFOS# show ipv6 route
IPv6 Routing Table - 7 entries
Codes : C - Connected, S - Static
        O - OSPF, R - RIP, B - BGP
R  1111::/112   [3/120]
    via fe80::221:28ff:fe56:d7a9, vlan30
C  2222::/112   [1/1]
    via ::, vlan20
C  3333::/112   [1/1]
    via ::, vlan30
R  3333::/112   [2/120]
    via fe80::221:28ff:fe56:d7a9, vlan30
R  4444::/112   [2/120]
    via fe80::221:28ff:fe56:d7a9, vlan30
R  5555::/112   [2/120]
    via fe80::221:28ff:fe56:d7a9, vlan30
R  6666::/112   [3/120]
    via fe80::221:28ff:fe56:d7a9, vlan30
```

## 3. Disable the route redistribution on SEFOS1.

```
SEFOS 1 SEFOS# configure terminal
SEFOS 1 SEFOS(config)# ipv6 route rip
SEFOS 1 SEFOS(config-router)# no redistribute connected
SEFOS 1 SEFOS(config-router)# exit
```

## 4. On SEFOS2, review the route information after disabling redistribution.

Note that 5555::/112 [2/120] is missing from the output.

```
SEFOS 2 SEFOS# show ipv6 route
IPv6 Routing Table - 5 entries
Codes : C - Connected, S - Static
        O - OSPF, R - RIP, B - BGP
C  1111::/112   [1/1]
    via ::, vlan10
R  2222::/112   [3/120]
    via fe80::221:28ff:fe56:d7a9, vlan40
R  3333::/112   [3/120]
    via fe80::221:28ff:fe56:d7a9, vlan40
C  4444::/112   [1/1]
    via ::, vlan40
C  6666::/112   [1/1]
    via ::, vlan10
```



**5. On SEFOS3, review the route information after disabling redistribution.**

Note that 5555::/112 [2/120] is missing from the output.

```
SEFOS 3 SEFOS# show ipv6 route

IPv6 Routing Table - 6 entries
Codes : C - Connected, S - Static
        O - OSPF, R - RIP, B - BGP
R   1111::/112   [3/120]
      via fe80::221:28ff:fe56:d7a9, vlan30
C   2222::/112   [1/1]
      via ::, vlan20
C   3333::/112   [1/1]
      via ::, vlan30
R   3333::/112   [3/120]
      via fe80::221:28ff:fe56:d7a9, vlan30
R   4444::/112   [3/120]
      via fe80::221:28ff:fe56:d7a9, vlan30
R   6666::/112   [3/120]
      via fe80::221:28ff:fe56:d7a9, vlan30
```

## ▼ Disable the split-horizon Option

By default, the split-horizon option with poison reverse is enabled on all RIPng interfaces.

**1. On SEFOS1, enter the configuration mode for the interface and disable split-horizon.**

```
SEFOS 1 SEFOS# configure terminal
SEFOS 1 SEFOS(config)# interface vlan 40
SEFOS 1 SEFOS(config-if)# no ipv6 split-horizon
SEFOS 1 SEFOS(config-if)# end
SEFOS 1 SEFOS#
```

**2. Review the configuration information.**

```
SEFOS 1 SEFOS# show ipv6 rip

RIP port 521, multicast-group ff02::9,Maximum paths is 16
Updates every 30 seconds; expire after 180
Garbage Collect after 120 seconds
Split Horizon is off;
Interface:
vlan50
```

```
vlan40
vlan30
Redistribution:
  Connected,Routes Redistribution is enabled.
```

---

## Configuring the Debug Level for RIPng

The IPv6 RIPng debug option can be used to observe and debug RIPng issues.

- “Enable Debugging” on page 22
- “Disable RIPng Debugging” on page 23

### ▼ Enable Debugging

- Enable the debug level.

```
SEFOS 1 SEFOS# debug ipv6 rip all

RIP6: RIP6 : Got a update timer expiry on If = 41
RIP6: RIP6: Send RIP6 resp Dest port = 521 If = 41 Resp flag = 1
Dest Addr = ff02::9
RIP6: RIP6BUF: In bufwrite Bufptr = 0x11277798 data = 0x3cb9340e
offset = 0 size = 4 Copy = 1
RIP6: RIP6:Combining routes over If=41 RespFlag=1 Horizon=1
DestPort=521 DestAddr=ff02::9
RIP6: Sending over If=41 Route counter=0 Max no of RTE= 456 Len=4
BufPtr=0x3cb932f0
RIP6: RIP6BUF: In bufwrite Bufptr = 0x11277798 data = 0x3cb93280
offset = 4 size = 20 Copy = 1
RIP6: RIP6:Combining routes over If=41 RespFlag=1 Horizon=1
DestPort=521 DestAddr=ff02::9
RIP6: Sending over If=41 Route counter=1 Max no of RTE= 456 Len=24
BufPtr=0x3cb932f0
RIP6: RIP6BUF: In bufwrite Bufptr = 0x11277798 data = 0x3cb93280
offset = 24 size = 20 Copy = 1
RIP6: RIP6:Combining routes over If=41 RespFlag=1 Horizon=1
DestPort=521 DestAddr=ff02::9
RIP6: Sending over If=41 Route counter=2 Max no of RTE= 456 Len=44
BufPtr=0x3cb932f0
RIP6: RIP6BUF: In bufwrite Bufptr = 0x11277798 data = 0x3cb93280
offset = 44 size = 20 Copy = 1
```

```

RIP6: RIP6:Combining routes over If=41 RespFlag=1 Horizon=1
DestPort=521 DestAddr=ff02::9
RIP6: Sending over If=41 Route counter=3 Max no of RTE= 456 Len=64
BufPtr=0x3cb932f0
RIP6: RIP6BUF: In bufwrite Bufptr = 0x11277798 data = 0x3cb93280
offset = 64 size = 20 Copy = 1
RIP6: RIP6:Combining routes over If=41 RespFlag=1 Horizon=1
DestPort=521 DestAddr=ff02::9
RIP6: Sending over If=41 Route counter=4 Max no of RTE= 456 Len=84
BufPtr=0x3cb932f0
RIP6: RIP6BUF: In bufwrite Bufptr = 0x11277798 data = 0x3cb93280
offset = 84 size = 20 Copy = 1
RIP6: RIP6:Combining routes over If=41 RespFlag=1 Horizon=1
DestPort=521 DestAddr=ff02::9
RIP6: Sending over If=41 Route counter=5 Max no of RTE= 456 Len=
104 BufPtr=0x3cb932f0
RIP6: RIP6BUF: In bufwrite Bufptr = 0x11277798 data = 0x3cb93280
offset = 104 size = 20 Copy = 1
RIP6: RIP6:RIP6 send Buf=0x11277798 Send flag=1 DstUDP6Port=521
If=41 DestAddr=ff02::9 Len=124
RIP6: RIP6LIB: Starting timer Id = 3 Duration = 30 Timer Node =
0x11702424
RIP6: RIP6BUF: Reading from buf = 0x112777f8 data = 0x3cb934f4
offset = 0 size = 4 copy = 0
RIP6: RIP6BUF: Returning pointer = 0x35840d80 local data =
0x3cb934f4
RIP6: RIP6 : The RIP6 header has Command = 2 Version = 1 Reserved
field = 0
RIP6: RIP6:rcvd resp Buf=0x112777f8 HopLim=255 Len=124 If=41
SrcAddr=ff02::9 DestAddr=fe80::221:28ff:fe56:d7a9
RIP6: RIP6 : Received RIP6 response buffer :
RIP6: RIP6:snrOfRIPngRespDidnt putLlocalSrcAddr RespCameOnIf=41
SrcAddr=FF02:0000:0000:0000:0000:0000:0000:0009 DesAddr=
FE80:0000:0000:0000:0221:28FF

```

## ▼ Disable RIPng Debugging

- Type.

```
SEFOS 1 SEFOS# no debug ipv6 rip
```

