

**Oracle® Communications
Diameter Signaling Router**

Gateway Location Application (GLA) User's Guide

E57515 Revision 01

March 2015

Oracle® Communications Gateway Location Application (GLA) User's Guide

Copyright © 2011, 2015, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Table of Contents

Chapter 1: Introduction.....	7
Overview.....	8
Scope and Audience.....	8
Manual Organization.....	8
Documentation Admonishments.....	8
Related Publications.....	9
Locate Product Documentation on the Oracle Technology Network Site.....	9
Customer Training.....	9
My Oracle Support (MOS).....	10
Emergency Response.....	10
Chapter 2: User Interface Introduction.....	12
User Interface Organization.....	13
User Interface Elements	13
Main Menu Options.....	15
Missing Main Menu options.....	19
Common Graphical User Interface Widgets.....	19
Supported Browsers.....	19
System Login Page.....	20
Main Menu Icons.....	21
Work Area Displays.....	22
Customizing the Splash Page Welcome Message.....	25
Column Headers (Sorting).....	25
Page Controls.....	26
Clear Field Control.....	26
Optional Layout Element Toolbar.....	27
Filters.....	28
Pause Updates.....	30
Max Records Per Page Controls.....	30
Chapter 3: The Gateway Location Application.....	31
The Gateway Location Application (GLA).....	32
Gateway Location Application (GLA) Description.....	32

GLA GUI Conventions.....	33
GLA Functions.....	33
ComAgent Connectivity for GLA.....	33
Ingress Message Rate Alarming.....	33
GLA Operational Status.....	34
Chapter 4: Gateway Location Application Configuration.....	35
GLA Configuration Overview.....	36
GLA Exceptions.....	36
Configure GLA Exceptions elements.....	36
Configuring GLA Exceptions.....	37
GLA System Options.....	38
Configure GLA System Options elements	38
Configuring GLA System Options.....	40
GLA Alarm Settings.....	41
Configure GLA Alarm Settings elements	42
Configuring GLA Alarm Settings.....	42
Post-Configuration Activities.....	43
Enable the GLA.....	43
ComAgent and PSBR Status Verification.....	44
Verify Application Route Table.....	44
Enable GLA Query Client Connections.....	45
DSR Bulk Import and Export.....	45
Glossary.....	47

List of Figures

Figure 1: Oracle System Login.....20

Figure 2: Paginated table22

Figure 3: Scrollable table.....23

Figure 4: Form page.....23

Figure 5: Tabbed pages.....24

Figure 6: Tabbed pages.....24

Figure 7: Report output.....25

Figure 8: Sorting a Table by Column Header.....25

Figure 9: Clear Field Control X.....26

Figure 10: Optional Layout Element Toolbar.....27

Figure 11: Automatic Error Notification.....27

Figure 12: Examples of Filter Styles.....28

List of Tables

Table 1: Admonishments.....8

Table 2: User interface elements.....13

Table 3: Main Menu Options.....15

Table 4: Main Menu icons.....21

Table 5: Example Action buttons.....26

Table 6: Submit buttons.....26

Table 7: Filter control elements.....28

Table 8: Configure GLA Exception Elements.....37

Table 9: Configure GLA System Options Elements.....39

Table 10: Configure GLA Alarm Settings Elements.....42

Chapter 1

Introduction

Topics:

- *Overview.....8*
- *Scope and Audience.....8*
- *Manual Organization.....8*
- *Documentation Admonishments.....8*
- *Related Publications.....9*
- *Locate Product Documentation on the Oracle Technology Network Site.....9*
- *Customer Training.....9*
- *My Oracle Support (MOS).....10*
- *Emergency Response.....10*

This chapter contains a brief description of the Gateway Location Application (GLA) feature. The contents include sections about the document scope, audience, and organization; how to find related publications; and how to contact Customer Support for assistance.

Overview

This documentation:

- Gives a conceptual overview of the application's purpose, architecture, and functionality
- Describes the pages and fields on the application GUI (Graphical User Interface)
- Provides tasks for using the application interface
- Explains the organization of, and how to use, the documentation

Scope and Audience

This document is intended for anyone responsible for configuring and using the EAGLE XG DSR Gateway Location Application functionality. Users of this manual must have a working knowledge of telecommunications and network installations.

Manual Organization


This manual is organized into the following chapters:




- [Introduction](#) contains general information about the Gateway Location Application (GLA) documentation, the organization of this document, and how to get technical assistance.
- [User Interface Introduction](#) describes the organization and usage of the application user interface. In it you can find information about how the interface options are organized, how to use widgets and buttons, and how filtering and other page display options work.
- [The Gateway Location Application](#) describes the topology, architecture, components, and functions of the GLA.
- [Gateway Location Application Configuration](#) describes configuration of GLA application components.

Documentation Admonishments

Admonishments are icons and text throughout this manual that alert the reader to assure personal safety, to minimize possible service interruptions, and to warn of the potential for equipment damage.

Table 1: Admonishments

Icon	Description
 <p>DANGER</p>	<p>Danger: (This icon and text indicate the possibility of <i>personal injury</i>.)</p>

Icon	Description
 WARNING	Warning: (This icon and text indicate the possibility of <i>equipment damage</i> .)
 CAUTION	Caution: (This icon and text indicate the possibility of <i>service interruption</i> .)
 TOPPLE	Topple: (This icon and text indicate the possibility of <i>personal injury and equipment damage</i> .)

Related Publications

For information about additional publications that are related to this document, refer to the *Related Publications Reference* document, which is published as a separate document on the Oracle Technology Network (OTN) site. See [Locate Product Documentation on the Oracle Technology Network Site](#) for more information.

Locate Product Documentation on the Oracle Technology Network Site

Oracle customer documentation is available on the web at the Oracle Technology Network (OTN) site, <http://docs.oracle.com>. You do not have to register to access these documents. Viewing these files requires Adobe Acrobat Reader, which can be downloaded at www.adobe.com.

1. Log into the Oracle Technology Network site at <http://docs.oracle.com>.
2. Select the **Applications** tile.
The **Applications Documentation** page appears.
3. Select **Apps A-Z**.
4. After the page refreshes, select the **Communications** link to advance to the **Oracle Communications Documentation** page.
5. Navigate to your Product and then the Release Number, and click the **View** link (note that the Download link will retrieve the entire documentation set).
6. To download a file to your location, right-click the **PDF** link and select **Save Target As**.

Customer Training

Oracle University offers training for service providers and enterprises. Visit our web site to view, and register for, Oracle Communications training:

<http://education.oracle.com/communication>

To obtain contact phone numbers for countries or regions, visit the Oracle University Education web site:

www.oracle.com/education/contacts

My Oracle Support (MOS)

MOS (<https://support.oracle.com>) is your initial point of contact for all product support and training needs. A representative at Customer Access Support (CAS) can assist you with MOS registration.

Call the CAS main number at **1-800-223-1711** (toll-free in the US), or call the Oracle Support hotline for your local country from the list at <http://www.oracle.com/us/support/contact/index.html>. When calling, make the selections in the sequence shown below on the Support telephone menu:

1. Select **2** for New Service Request
2. Select **3** for Hardware, Networking and Solaris Operating System Support
3. Select one of the following options:
 - For Technical issues such as creating a new Service Request (SR), Select **1**
 - For Non-technical issues such as registration or assistance with MOS, Select **2**

You will be connected to a live agent who can assist you with MOS registration and opening a support ticket.

MOS is available 24 hours a day, 7 days a week, 365 days a year.

Emergency Response

In the event of a critical service situation, emergency response is offered by the Customer Access Support (CAS) main number at **1-800-223-1711** (toll-free in the US), or by calling the Oracle Support hotline for your local country from the list at <http://www.oracle.com/us/support/contact/index.html>. The emergency response provides immediate coverage, automatic escalation, and other features to ensure that the critical situation is resolved as rapidly as possible.

A critical situation is defined as a problem with the installed equipment that severely affects service, traffic, or maintenance capabilities, and requires immediate corrective action. Critical situations affect service and/or system operation resulting in one or several of these situations:

- A total system failure that results in loss of all transaction processing capability
- Significant reduction in system capacity or traffic handling capability
- Loss of the system's ability to perform automatic system reconfiguration
- Inability to restart a processor or the system
- Corruption of system databases that requires service affecting corrective actions
- Loss of access for maintenance or recovery operations
- Loss of the system ability to provide any required critical or major trouble notification

Any other problem severely affecting service, capacity /traffic, billing, and maintenance capabilities may be defined as critical by prior discussion and agreement with Oracle.

Chapter 2

User Interface Introduction

Topics:

- [User Interface Organization.....13](#)
- [Missing Main Menu options.....19](#)
- [Common Graphical User Interface Widgets.....19](#)

This section describes the organization and usage of the application user interface. In it you can find information about how the interface options are organized, how to use widgets and buttons, and how filtering and other page display options work.

User Interface Organization

The user interface is the central point of user interaction with an application. It is a Web-based graphical user interface (GUI) that enables remote user access over the network to an application and its functions.

DSR GUI

In a DSR, the following Main Menu options are accessible from the System OAM (SOAM) server:

- Transport Manager
- Communication Agent
- SS7/Sigtran
- Diameter Common
- Diameter
- RBAR
- FABR
- Policy and Charging
- IPFE
- MAP-Diameter IWF
- CPA

The following Main Menu options are accessible from the Network OAM (NOAM) server:

- Communication Agent
- Diameter Common > Network Identifiers > MCCMNC, MCCMNC Mapping
- Diameter > Configuration for Topology Hiding,
- Network-wide Policy and Charging > Configuration components are configurable on the NOAM; some Configuration components are view-only on the SOAM. Policy and Charging > Maintenance components are accessible on the NOAM only.
- MAP-Diameter IWF

Bulk Import and Bulk Export functions appear on both OAMs, to be used for the data that can be configured on that OAM.

Most other Main Menu options are configurable from the Network OAM server and view-only from the System OAM server.

User Interface Elements

Table 2: User interface elements describes elements of the user interface.

Table 2: User interface elements

Element	Location	Function
Identification Banner	Top bar across the web page	Displays the company name, product name and version, and the alarm panel.

Element	Location	Function
Session Banner	Next bar across the top of the web page	<p>The left side of the banner just above the Main Menu provides the following session information:</p> <ul style="list-style-type: none"> • The name of the machine to which the user is connected, and whether the user is connected via the VIP or directly to the machine. • The HA state of the machine to which the user is connected. • The role of the machine to which the user is connected. <p>The right side of the banner:</p> <ul style="list-style-type: none"> • Shows the user name of the currently logged-in user. • Provides a link to log out of the GUI.
Main Menu	Left side of screen, under banners	<p>A tree-structured menu of all operations that can be performed through the user interface. The plus character (+) indicates that a menu item contains subfolders.</p> <ul style="list-style-type: none"> • To display submenu items, click the plus character, the folder, or anywhere on the same line. • To select a menu item that does not have submenu items, click on the menu item text or its associated symbol.
Work Area	Right side of panel under status	<p>Consists of three sections: Page Title Area, Page Control Area (optional), and Page Area.</p> <ul style="list-style-type: none"> • Page Title Area: Occupies the top of the work area. It displays the title of the current page being displayed, the date and time, and includes a link to context-sensitive help. • Page Control Area: Is located below the Page Title Area, and is used to show controls for the Page Area (this area is optional). When available for an option, filter controls display in this area. The Page Control Area contains the optional layout element toolbar, which displays different elements depending on which GUI page is selected. For more information, see Optional Layout Element Toolbar. • Page Area: Occupies the bottom of the work area. This area is used for all types of operations. It displays all options, status, data, file, and query screens. Information or error messages are displayed in a message box at the top of this section. A horizontal and/or vertical scroll bar is

Element	Location	Function
		provided when the displayed information exceeds the page area of the screen. When a user first logs in, this area displays the application user interface page. The page displays a user-defined welcome message. To customize the message, see Customizing the Splash Page Welcome Message .

Main Menu Options

Table 3: Main Menu Options describes all main menu user interface options.

Note: The menu options can differ according to the permissions assigned to a user's log-in account. For example, the Administration menu options would not appear on the screen of a user who does not have administrative privileges.

Note: Some menu items are configurable only on the NOAM and view-only on the SOAM; and some menu options are configurable only on the SOAM. See [DSR GUI](#).

Note: Some features will not appear in the main menu until the features are activated.

Table 3: Main Menu Options

Menu Item	Function
Administration	<p>The Administration menu allows the user to:</p> <ul style="list-style-type: none"> • Set up and manage user accounts • Configure group permissions • View session information • Manage sign-on certificates • Authorize IP addresses to access the user interface • Configure SFTP user information • Configure options such as password history and expiration, login message, welcome message, and the number of failed login attempts before an account is disabled • Manage licenses and upgrades • Authenticate LDAP servers • Configure SNMP trapping services • Validate and transfer ISO files • Prepare, initiate, monitor, and complete upgrades • View the software versions report • Configure an export server • Configure DNS elements
Configuration	<p>On the NOAM, allows the user to configure:</p> <ul style="list-style-type: none"> • Network Elements • Network Devices • Network Routes

Menu Item	Function
	<ul style="list-style-type: none"> • Services • Servers • Server Groups • Resource Domains • Places • Place Associations <p>On the SOAM, allows the user to configure the NOAM list plus Interface and Port DSCP.</p>
Alarms and Events	<p>Allows the user to view:</p> <ul style="list-style-type: none"> • Active alarms and events • Alarm and event history • Trap log
Security Log	<p>Allows the user to view, export, and generate reports from security log history.</p>
Status & Manage	<p>Allows the user to monitor the individual and collective status of Network Elements, Servers, HA functions, Databases, system Processes, and Tasks. The user can perform actions required for server maintenance, database management, and data file management.</p>
Measurements	<p>Allows the user to view and export measurement data.</p>
Transport Manager	<p>Allows the user to configure adjacent nodes, configuration sets, or transports; and edit transports.</p>
Communication Agent	<p>Allows the user to configure Remote Servers, Connection Groups, and Routed Services. Also allows the user to monitor the status of Connections, Routed Services, and HA Services.</p>
SS7/Sigtran (optional)	<p>Allows the user to configure various users, groups, remote signaling points, links and other items associated with SS7/Sigtran; perform maintenance and troubleshooting activities; and provides a command line interface for bulk loading SS7 configuration data.</p>
Diameter Common	<p>Allows the user to configure:</p> <ul style="list-style-type: none"> • Network Identifiers: on the NOAM - MCC Ranges • Network Identifiers on the SOAM - MCCMNC and MCCMNC Mapping • MPs (on the SOAM) - editable Profile parameters and Profile assignments <p>The DSR Bulk Import and Export functions are available on both OAMs for the data that is configured on that OAM.</p>
Diameter	<p>Allows the user to configure, modify, and monitor Diameter routing:</p> <ul style="list-style-type: none"> • On the NOAM, Diameter Topology Hiding configuration

Menu Item	Function
	<ul style="list-style-type: none"> • On the SOAM, Diameter Configuration, AVP Dictionary and Troubleshooting for IDIH configuration; Diameter Mediation configuration: and Maintenance functions
RBAR (Range-Based Address Resolution) (optional)	Allows the user to configure the following Range-Based Address Resolution (RBAR) settings: <ul style="list-style-type: none"> • Applications • Exceptions • Destinations • Address Tables • Addresses • Address Resolutions • System Options This is accessible from the SOAM only.
FABR (Full Address Based Resolution) (optional)	Allows the user to configure the following Full Address Based Resolution (FABR) settings: <ul style="list-style-type: none"> • Applications • Exceptions • Default Destinations • Address Resolutions • System Options This is accessible from the SOAM only.
Policy and Charging (optional)	On the NOAM, allows the user to perform configuration tasks, edit options, and view elements for: <ul style="list-style-type: none"> • General Options • Access Point Names • Policy DRA <ul style="list-style-type: none"> • PCRF Pools • PCRF Sub-Pool Selection Rules • Network-Wide Options • Online Charging DRA <ul style="list-style-type: none"> • OCS Session State • Realms • Network-Wide Options • Alarm Settings • Congestion Options On the NOAM, allows the user to perform maintenance tasks, edit options, and view elements for: <ul style="list-style-type: none"> • Maintenance <ul style="list-style-type: none"> • SBR Status

Menu Item	Function
	<ul style="list-style-type: none"> • Policy Database Query <p>On the SOAM, allows the user to perform configuration tasks, edit options, and view elements for:</p> <ul style="list-style-type: none"> • General Options • Access Point Names • Policy DRA <ul style="list-style-type: none"> • PCRFs • Binding Key Priority • PCRF Pools • PCRF Pool to PRT Mapping • PCRF Sub-Pool Selections • Policy Clients • Site Options • Online Charging DRA <ul style="list-style-type: none"> • OCSs • CTFs • OCS Session State • Realms • Error Codes • Alarm Settings • Congestion Options
Gateway Location Application (Optional)	<p>On the SOAM, allows the user to perform configuration tasks, edit options, and view elements for:</p> <ul style="list-style-type: none"> • Exceptions • Options <p>GLA can deploy with Policy DRA (in the same DA-MP or a separate DA-MP).</p>
IPFE (optional)	<p>Allows the user to configure IP Front End (IPFE) options and IP List TSAs.</p> <p>This is accessible from the SOAM server only.</p>
MAP-Diameter Interworking	<p>On the SOAM, allows the user to perform configuration tasks, edit options, and view elements for the DM-IWF DSR Application:</p> <ul style="list-style-type: none"> • DM-IWF Options • Diameter Exception <p>On the NOAM, allows the user to perform configuration tasks, edit options, and view elements for the MD-IWF SS7 Application:</p> <ul style="list-style-type: none"> • MD-IWF Options • Diameter Realm

Menu Item	Function
	<ul style="list-style-type: none"> • Diameter Identity GTA • GTA Range to PC • MAP Exception • CCNDC Mapping
CPA (Charging Proxy Application) (optional)	<p>Allows the user to perform configuration tasks, edit system options, and view elements for:</p> <ul style="list-style-type: none"> • System Options • Message Copy • Session Binding Repository • SBR Subresource Mapping <p>This is accessible from the SOAM only.</p>
Help	Launches the Help system for the user interface.
Logout	Allows the user to log out of the user interface.

Missing Main Menu options

Permissions determine which Main Menu options are visible to users. Permissions are defined through the **Group Administration** page. The default group, **admin**, is permitted access to all GUI options and functionality. Additionally, members of the **admin** group set permissions for other users.

Main Menu options vary according to the group permissions assigned to a user's account. Depending on your user permissions, some menu options may be missing from the Main Menu. For example, Administration menu options will not appear on your screen if you do not have administrative permissions. For more information about user permissions, see *Group Administration* in the OAM section of the online help, or contact your system administrator.

Common Graphical User Interface Widgets

Common controls allow you to easily navigate through the system. The location of the controls remains static for all pages that use the controls. For example, after you become familiar with the location of the display filter, you no longer need to search for the control on subsequent pages because the location is static.

Supported Browsers

This application supports the use of Microsoft® Internet Explorer 8.0, 9.0, or 10.0.


System Login Page

Access to the user interface begins at the System Login page. The System Login page allows users to log in with a username and password and provides the option of changing a password upon login. The System Login page also features a current date and time stamp and a customizable login message.

The user interface is accessed via HTTPS, a secure form of the HTTP protocol. When accessing a server for the first time, HTTPS examines a web certificate to verify the identity of the server. The configuration of the user interface uses a self-signed web certificate to verify the identity of the server. When the server is first accessed, the supported browser warns the user that the server is using a self-signed certificate. The browser requests confirmation that the server can be trusted. The user is required to confirm the browser request.

Customizing the Login Message

Prior to logging in, the **System Login** page appears. You can create a login message that will appear just below the **Log In** button on the **System Login** page.

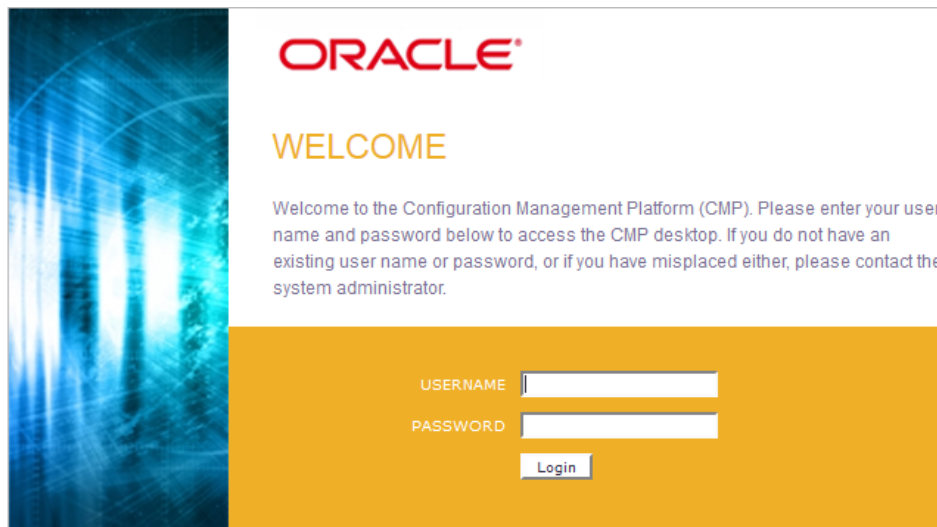

COPYRIGHT © 2003, 2014 ORACLE. ALL RIGHTS RESERVED.

Figure 1: Oracle System Login

1. From the **Main Menu**, select **Administration > General Options**.

The **General Options Administration** page appears.

2. Locate **LoginMessage** in the **Variable** column.
3. Enter the login message text in the **Value** column.
4. Click **OK** or **Apply** to submit the information.

A status message appears at the top of the Configuration Administration page to inform you if the operation was successful.

The next time you log in to the user interface, the login message text is displayed.

Accessing the DSR Graphical User Interface

In a DSR, some configuration is done at the NOAM server, while some is done at the SOAM server. Because of this, you will access the DSR graphical user interface (GUI) from two servers. Certificate Management (Single Sign-On) can be configured to simplify accessing the DSR GUI on the NOAM and the SOAM.

For information on configuring Single Sign-On certificates, see **OAM > Administration > Access Control > Certificate Management** in the DSR online help.

After the certificates have been configured, you can log into the DSR GUI on any NOAM or SOAM, and then access the DSR GUI on other servers (NOAM or other SOAMs) without having to re-enter your login credentials.




1. In the browser URL field, enter the fully qualified hostname of the NOAM server, for example `https://dsr-no.yourcompany.com`.
When using Single Sign-On, you cannot use the IP address of the server.
2. When prompted by the browser, confirm that the server can be trusted.
The System Login page appears.
3. Enter the Username and Password for your account.
The DSR GUI for the NOAM appears.
4. To access the DSR GUI for the SOAM, open another browser window and enter the fully qualified hostname of the SOAM.
The DSR GUI for the SOAM appears.








You can toggle between the DSR GUI on the NOAM and the DSR GUI on the SOAM as you perform configuration tasks.

Main Menu Icons

This table describes the icons used in the **Main Menu**.

Table 4: Main Menu icons

Icon	Name	Description
	Folder	Contains a group of operations. If the folder is expanded by clicking the plus (+) sign, all available operations and sub-folders are displayed. Clicking the minus (-) will collapse the folder.
	Config File	Contains operations in an Options page.
	File with Magnifying Glass	Contains operations in a Status View page.

Icon	Name	Description
	File	Contains operations in a Data View page.
	Multiple Files	Contains operations in a File View page.
	File with Question Mark	Contains operations in a Query page.
	User	Contains operations related to users.
	Group	Contains operations related to groups.
	Help	Launches the Online Help.
	Logout	Logs the user out of the user interface.

Work Area Displays

In the user interface, you will see a variety of page formats. Tables, forms, tabbed pages, and reports are the most common formats in the user interface.

Note: Screenshots are provided for reference only and may not exactly match a specific application's GUI.

Tables

Paginated tables describe the total number of records being displayed at the beginning and end of the table. They provide optional pagination, with **First | Prev | Next | Last** links at both the beginning and end of this table type. Paginated tables also contain action links on the beginning and end of each row. For more information on action links and other page controls, see [Page Controls](#).

Displaying Records 1-1 of 1 | [First](#) | [Prev](#) | [Next](#) | [Last](#)

Action	System ID	IP Address	Permission	Action
Edit Delete	lisa	10.25.62.4	READ_WRITE	Edit Delete

Displaying Records 1-1 of 1 | [First](#) | [Prev](#) | [Next](#) | [Last](#)

Figure 2: Paginated table

Scrollable tables display all of the records on a single page. The scroll bar, located on the right side of the table, allows you to view all records in the table. Scrollable tables also provide action buttons that operate on selected rows. For more information on buttons and other page controls, see [Page Controls](#).

Sequence #	Alarm ID	Timestamp	Severity	Product	Process	NE	Server	Type	Instance	Alarm Text
3498	31201	2009-Jun-11 18:07:41.214 UTC	MAJOR	MiddleWare	procmgr	OAMPNE	teks8011006	PROC	eclipseHelp	A managed process cannot be started or has unexpectedly terminated
5445	31201	2009-Jun-11 18:07:27.137 UTC	MAJOR	MiddleWare	procmgr	SOAMP	teks8011002	PROC	eclipseHelp	A managed process cannot be started or has unexpectedly terminated
5443	31107	2009-Jun-11 18:07:24.704 UTC	MINOR	MiddleWare	inetmerge	SOAMP	teks8011002	COLL	teks8011004	DB merging from a child Source Node has failed
5444	31107	2009-Jun-11 18:07:24.704 UTC	MINOR	MiddleWare	inetmerge	SOAMP	teks8011002	COLL	teks8011003	DB merging from a child Source Node has failed
5441	31209	2009-Jun-11 18:07:22.640 UTC	MINOR	MiddleWare	re.portmap	SOAMP	teks8011002	SW	teks8011003	Unable to resolve a hostname specified in the NodeInfo table.
										Unable to resolve a hostname specified in the NodeInfo table.

Export

Figure 3: Scrollable table

Note: Multiple rows can be selected in a scrollable table. Add rows one at a time using CTRL-click. Add a span of rows using SHIFT-click.

Forms

Forms are pages on which data can be entered. Forms are typically used for configuration. Forms contain fields and may also contain a combination of pulldown lists, buttons and links.

Username: (5-16 characters)

Group:

Time Zone:

Maximum Concurrent Logins: Maximum concurrent logins for a user (0=no limit). [Default = 1; Range = 0-50]

Session Inactivity Limit: Time (in minutes) after which login sessions expire (0 = never). [Default = 120; Range = 0-120]

Comment: (max 64 characters)

Temporary Password: (8-16 characters)

Re-type Password: (8-16 characters)

Ok Apply Cancel

Figure 4: Form page

Tabbed pages

Tabbed pages provide collections of data in selectable tabs. Click on a tab to see the relevant data on that tab. Tabbed pages also group Retrieve, Add, Update, and Delete options on one page. Click on the relevant tab for the task you want to perform and the appropriate fields will populate on the page. Retrieve is always the default for tabbed pages.

Entire Network	*	System.CPU_CoreUtilPct_Average	System.CPU_CoreUtilPct_Peak			
NOAMP						
SOAM						
	Timestamp	System CPU UtilPct Average	System CPU UtilPct Peak	System Disk UtilPct Average	System Disk UtilPct Peak	System RAM UtilPct Average
	10/22/2009 19:45	6.764068	44	0.520000	1	7.939407
	10/22/2009 20:00	7.143644	25	0.520000	1	8.523822

Figure 5: Tabbed pages

Retrieve
Add
Update
Delete

Fields marked with a red asterisk (*) require a value.

Field	Value	Description
Network Entity	<input type="text"/>	* Numeric identifier for the Network Entity 1-15 DIGITS

Figure 6: Tabbed pages

Reports

Reports provide a formatted display of information. Reports are generated from data tables by clicking the **Report** button. Reports can be viewed directly on the user interface, or they can be printed. Reports can also be saved to a text file.


```

=====
User Account Usage Report
=====

Report Generated: Fri Jun 19 19:30:55 2009 UTC
From: Unknown Network OAM&P on host teks5001701
Report Version: 1.0
User: guiadmin

-----
Username          Date of Last Login   Days Since Last Login   Account Status
-----
guiadmin          2009-06-19 19:00:17   0                        enabled

-----

End of User Account Usage Report
=====

```

Figure 7: Report output

Customizing the Splash Page Welcome Message

When you first log in to the user interface, the **User Interface** splash page appears. You can display a customized welcome message on the **User Interface** splash page. Use this procedure to customize the message.

1. From the **Main Menu**, select **Administration > General Options**.
The **General Options Administration** page appears.
2. Locate **WelcomeMessage** in the **Variable** column.
3. Enter the welcome message text in the **Value** column.
4. Click **Update OK** or **Apply** to submit the information.

A status message appears at the top of the Configuration Administration page to inform you if the operation was successful.

The next time you log in to the user interface, the welcome message text is displayed.

Column Headers (Sorting)

You can sort a table by a column by clicking the column header. However, sorting is not necessarily available on every column. Sorting does not affect filtering.

When you click the header of a column that the table can be sorted by, an indicator appears in the column header showing the direction of the sort. See [Figure 8: Sorting a Table by Column Header](#). Clicking the column header again reverses the direction of the sort.

Local Node Name ▼	Realm	FQDN	SCTP Listen Port	TCP Listen Port	Connection Configuration Set	CEX Configuration Set	IP Addresses
-------------------	-------	------	------------------	-----------------	------------------------------	-----------------------	--------------

Figure 8: Sorting a Table by Column Header

Page Controls

User interface pages contain controls, such as buttons and links, that perform specified functions. The functions are described by the text of the links and buttons.

Note: Disabled buttons are grayed out. Buttons that are irrelevant to the selection or current system state, or which represent unauthorized actions as defined in **Group Administration**, are disabled. For example, **Delete** is disabled for users without Global Data Delete permission. Buttons are also disabled if, for example, multiple servers are selected for an action that can only be performed on a single server at a time.

Table 5: Example Action buttons contains examples of Action buttons.

Table 5: Example Action buttons

Action button	Function
Insert	Insert data into a table
Edit	Edit data within a table
Delete	Delete data from table
Change	Change the status of a managed object

Some Action buttons take you to another page.

Submit buttons, described in *Table 6: Submit buttons*, are used to submit information to the server. The buttons are located in the page area and accompanied by a table in which you can enter information. The submit buttons, except for **Cancel**, are disabled until you enter some data or select a value for all mandatory fields.

Table 6: Submit buttons

Submit button	Function
OK	Submits the information to the server, and if successful, returns to the View page for that table.
Apply	Submits the information to the server, and if successful, remains on the current page so that you can enter additional data.
Cancel	Returns to the View page for the table without submitting any information to the server.

Clear Field Control

The clear field control is a widget that allows you to clear the value from a pulldown list. The clear field control is available only on some pulldown fields.

Click the X next to a pulldown list to clear the field.




Figure 9: Clear Field Control X

Optional Layout Element Toolbar

The optional layout element toolbar appears in the Page Control Area of the GUI.




Figure 10: Optional Layout Element Toolbar

The toolbar displays different elements depending on which GUI page is selected. The elements of the toolbar that can appear include:

- Filter - Allows you to filter data in a table.
- Errors - Displays errors associated with the work area.
- Info - Displays information messages associated with the work area.
- Status - Displays short status updates associated with the main work area.
- Warning - Displays warnings associated with the work area.

Notifications

Some messages require immediate attention, such as errors and status items. When new errors occur, the Errors element opens automatically with information about the error. Similarly, when new status items are added, the Status element opens. If you close an automatically opened element, the element stays closed until a new, unacknowledged item is added.

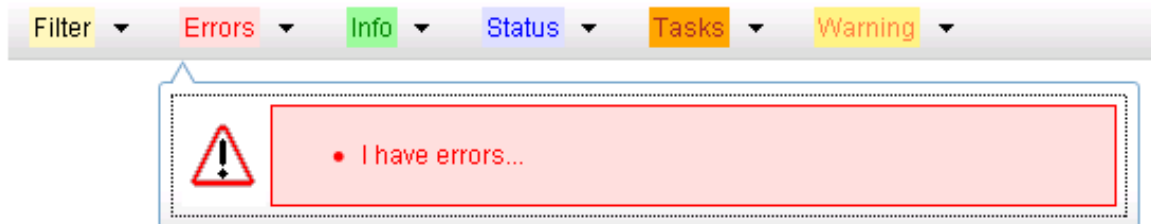


Figure 11: Automatic Error Notification

Note: Viewing and closing an error does not clear the Errors element. If you reopen the Errors element, previously viewed errors are still in the list.

When new messages are added to Warning or Info, the styling of the element changes to indicate new messages are available. The styling of the Task element changes when a task changes state (such as, a task begins or ends).

Opening an Element in the Toolbar

Use this procedure to open an element in the optional layout element toolbar.

1. Click the text of the element or the triangle icon to open an element.
The selected element opens and overlays the work area.
2. Click X to close the element display.

Filters

Filters are part of the optional layout element toolbar and appear throughout the GUI in the Page Control Area. For more information about optional layout element toolbar functionality, see [Optional Layout Element Toolbar](#).

Filters allow you to limit the data presented in a table and can specify multiple filter criteria. By default, table rows appear unfiltered. Three types of filters are supported, however, not all filtering options are available on every page. The types of filters supported include:

- Network Element - When enabled, the Network Element filter limits the data viewed to a single Network Element.

Note: Once enabled, the Network Element filter will affect all pages that list or display data relating to the Network Element.

- Collection Interval - When enabled, the collection interval filter limits the data to entries collected in a specified time range.
- Display Filter - The display filter limits the data viewed to data matching the specified criteria.

Once a field is selected, it cannot be selected again. All specified criteria must be met in order for a row to be displayed.

The style or format of filters may vary depending on which GUI pages the filters are displayed. Regardless of appearance, filters of the same type function the same.



Figure 12: Examples of Filter Styles

Filter Control Elements

This table describes filter control elements of the user interface.

Table 7: Filter control elements

Operator	Description
=	Displays an exact match.
!=	Displays all records that do not match the specified filter parameter value.
>	Displays all records with a parameter value that is greater than the specified value.
>=	Displays all records with a parameter value that is greater than or equal to the specified value.

Operator	Description
<	Displays all records with a parameter value that is less than the specified value.
<=	Displays all records with a parameter value that is less than or equal to the specified value.
Like	Enables you to use an asterisk (*) as a wildcard as part of the filter parameter value.
Is Null	Displays all records that have a value of Is Null in the specified field.

Note: Not all filterable fields support all operators. Only the supported operators will be available for you to select.

Filtering on the Network Element

The global Network Element filter is a special filter that is enabled on a per-user basis. The global Network Element filter allows a user to limit the data viewed to a single Network Element. Once enabled, the global Network Element filter affects all sub-screens that display data related to Network Elements. This filtering option may not be available on all pages.

1. Click **Filter** in the optional layout element toolbar.
The filter tool appears.
2. Select a Network Element from the **Network Element** pulldown menu.
3. Click **Go** to filter on the selection, or click **Reset** to clear the selection.

Records are displayed according to the specified criteria.

Filtering on Collection Interval

The Collection Interval filter allows a user to limit the data viewed to a specified time interval. This filtering option may not be available on all pages.

1. Click **Filter** in the optional layout element toolbar.
The filter tool appears.
2. Enter a duration for the **Collection Interval** filter.
The duration must be a numeric value.
3. Select a unit of time from the pulldown menu.
The unit of time can be seconds, minutes, hours, or days.
4. Select **Beginning** or **Ending** from the pulldown menu.
5. Click **Go** to filter on the selection, or click **Reset** to clear the selection.

Records are displayed according to the specified criteria.

Filtering using the Display Filter

Use this procedure to perform a filtering operation. This procedure assumes that you have a data table displayed on your screen. This process is the same for all data tables. However, all filtering operations are not available for all tables.

1. Click **Filter** in the optional layout element toolbar.

The filter tool appears.

2. Select a field name from the **Display Filter** pulldown menu.

This selection specifies the field in the table that you want to filter on. The default is **None**, which indicates that you want all available data displayed.

The selected field name displays in the **Display Filter** field.

3. Select an operator from the operation selector pulldown menu.

The selected operator appears in the field.

4. Enter a value in the value field.

This value specifies the data that you want to filter on. For example, if you specify Filter=Severity with the equals (=) operator and a value of MINOR, the table would show only records where Severity=MINOR.

5. For data tables that support compound filtering, click the **Add** button to add another filter condition. Then repeat steps 2 through 4.

Multiple filter conditions are joined by an AND operator.

6. Click **Go** to filter on the selection, or click **Reset** to clear the selection.

Records are displayed according to the specified criteria.

Pause Updates

Some pages refresh automatically. Updates to these pages can be paused by selecting the **Pause updates** checkbox. Uncheck the **Pause updates** checkbox to resume automatic updates. The **Pause updates** checkbox is available only on some pages.

Max Records Per Page Controls

Max Records Per Page is used to control the maximum number of records displayed in the page area. If a page uses pagination, the value of Max Records Per Page is used. Use this procedure to change the Max Records Per Page.

1. From the **Main Menu**, select **Administration > General Options**.

The **General Options Administration** page appears.

2. Change the value of the **MaxRecordsPerPage** variable.

Note: **MaxRecordsPerPage** has a range of values from 10 to 100 records. The default value is 20.

3. Click **OK** or **Apply**.

OK saves the change and returns to the previous page.

Apply saves the change and remains on the same page.

The maximum number of records displayed is changed.

Chapter 3

The Gateway Location Application

Topics:

- [The Gateway Location Application \(GLA\).....32](#)
- [Gateway Location Application \(GLA\) Description.....32](#)

The Gateway Location Application (GLA) is a feature of the Diameter Signaling Router (DSR) product. GLA runs as a DSR Application, to provide a Diameter interface to subscriber data stored in the DSR's Policy Session Binding Repository (pSBR).

The Gateway Location Application (GLA)

The Gateway Location Application (GLA) is a DSR Application that provides a Diameter interface to subscriber data stored in the DSR's Policy Session Binding Repository (pSBR). Subscriber data concerning binding and session information is populated in the pSBR-B (Policy SBR - Binding) by the Policy Diameter Routing Agent (Policy DRA). GLA provides methods for a Diameter node to query binding information stored in the pSBR-B. The query can be by either IMSI or MSISDN.

GLA processes Diameter Requests and generates Diameter Answers. It does not route Diameter Requests to other Diameter nodes. A Diameter Peer Node can be a Gateway Query Client (GQC). GLA allows DSR to be a Gateway Query Server (GQS)

GLA provides the following capabilities:

- Ability to configure GLA exceptions
- Ability to configure GLA system options
- Ability to configure GLA alarm thresholds

Gateway Location Application (GLA) Description

Gateway Location Application (GLA) is a DSR Application that retrieves subscriber data stored in Policy Session Binding Repository (pSBR) provided by Policy DRA. The GLA is deployed and must be in the same Resource Domain as DA-MPs activated with Policy DRA. No additional Resource Domain configuration is needed specifically for GLA in the DSR GUI.

After a DA-MP is activated with the GLA, it receives a Request (Get Gateway Request (GGR)) generated by the Gateway Query Client (GQC), then decodes subscriber information (IMSI or MSISDN), then queries the pSBR (via ComAgent within the Gateway Query Server (GQS) or DSR). The GLA generates an Answer (Get Gateway Answer (GGA)) with subscriber information that includes the number of bindings for the subscriber, and the following information is included for each session:

- Access Point name
- PCEF FQDN
- Creation timestamp

The GLA is dependent on Policy DRA to populate data in pSBR and thus GLA will use Activation/Deactivation rules in the following conditions:

- The GLA is activated using the same mechanism as Policy DRA. It will be activated at the NOAM, and activation is performed so that it activates all SOAMs under a common NOAM.
- GLA cannot be activated unless Policy DRA is activated and PCRF-Pooling has been enabled.
- Policy DRA cannot be deactivated if GLA is activated.

To simplify deployment of GLA, it is piggybacked on Policy-DRA's configuration of DA-MPs within its Resource Domain and configuration of ComAgent connections between DA-MPs and pSBRs.

If PCRF pooling is enabled with GLA activated, Policy DRA stores all information required by GLA.

GLA GUI Conventions

The GLA GUI uses the following conventions (this is not an all-inclusive list):

- The breadcrumb displays at the top of the GUI page reflects your position in the menu tree.
- Context sensitive online help is available via the help icon in the upper right side of the GUI page.
- Action buttons are available at the bottom of the GUI page.
- Edit and delete actions will be validated.
- Successful edit and delete actions generate a confirmation message.
- The items that are displayed on the GUI page differ from SOAM and NOAM views.
- The workspace grid is displayed in ascending order by the first field in the grid.
- All columns in the managed object View screen can be sorted by column headers.
- The column headers on all of the GLA view screens are sorted in ascending order by default.
- You can select only one row at a time in the work area grid of the managed object View screen, unless otherwise specified.
- **Edit** and **Delete** are not active until you select a row.
- **Apply** applies any updates and remains on the same GUI page. **OK** applies and updates and returns to the pervious GUI page.
- **OK**, **Apply**, and **Cancel** are enabled by default on all Insert and Edit screens where they appear.

GLA Functions

The GLA application performs the following major functions:

- Provides a Diameter interface to subscriber data stored in the DSR's Policy Session Binding Repository (pSBR)
- Provides methods for a Diameter node to query binding information stored in the pSBR-B
- Processes Diameter Requests and generates Diameter Answers

ComAgent Connectivity for GLA

GLA works with DA-MPs that require ComAgent connectivity to every pSBR-B server in a Policy Binding Resource Domain.

GLA does not configure its own ComAgent connections, but relies on the ComAgent connectivity setup already provided by Policy DRA. When a DA-MP initializes with GLA active, the DA-MP automatically creates ComAgent connections to each pSBR-B.

Ingress Message Rate Alarming

GLA generates alarms based on the ingress message rate. The message processing rates required to generate an alarm are set by the user while configuring GLA, and should be significantly lower than a standard DA-MP's ingress message rate under any DA-MP profile.

The Ingress Message Rate Alarm is a notification that higher than 'expected' rates of traffic are being processed by the DSR Application.

Alarm trigger points differ based on whether the GLA is deployed as the sole DSR Application on a DA-MP or combined with Policy DRA on the same DA-MP. To satisfy the deployment variables, the Ingress Message Rate has the following settings:

Field	Default	Configurable Range	Rules
Maximum	DA-MP Max Ingress Message Rate	N/A	Not configurable. This value is provided by the DA-MP Profile
CL 1 Abatement / Onset (% of Maximum)	50 / 60	1-99	CL1 Onset > CL1 Abatement
CL 2 Abatement / Onset (% of Maximum)	70 / 80	1-99	CL2 Abatement > CL1 Onset CL2 Onset > CL2 Abatement
CL 3 Abatement / Onset (% of Maximum)	90 / 95	1-99	CL3 Abatement > CL2 Onset CL3 Onset > CL3 Abatement

GLA Operational Status

The operational status determines when DRL delivers a request to GLA (for example, when GLA is the Available status) and when DRL uses the Unavailability Action for requests (for example, when GLA is in the Unavailable status).

GLA's Operational Status is dependent on the following items:

- Admin State
- GLA Congestion Level
- pSBR-B SubResource Availability
- Previous Operational Status

When the GLA initializes with the Admin State set to 'Disabled', the Operational Status is set to Unavailable. When the Admin State changes from 'Enabled' to 'Disabled', the Operational Status is transitioned to Unavailable.

When the GLA initializes with the Admin State set to 'Enabled', or if the Admin State is changed from 'Disabled' to 'Enabled', the system begins to monitor resources to determine if it can change its Operational Status.

Once GLA moves into the Available state, the system attempts to answer as many queries as possible and remains available as long as any of the pSBR-B SubResources are also available.

Gateway Location Application Configuration

Topics:

- [GLA Configuration Overview.....36](#)
- [GLA Exceptions.....36](#)
- [GLA System Options.....38](#)
- [GLA Alarm Settings.....41](#)
- [Post-Configuration Activities.....43](#)

The **GLA > Configuration** GUI pages for GLA components provide fields for entering the information needed to manage Gateway Location Application configuration in the DSR.

GLA Configuration Overview

The **GLA > Configuration** GUI pages for Gateway Location Application components provide fields for entering the information needed to manage GLA configuration in the DSR.

Before configuring information in GLA the following characteristics need to be met:

- Since GLA retrieves subscriber information stored in pSBR-B by Policy DRA, Policy DRA must be active for data to be retrieved.
- GLA is activated at the NOAM, and also activates all SOAMs under a common NOAM.
- GLA cannot be active unless Policy DRA is active and PCRF-Pooling is enabled.

The **GLA > Configuration** GUI pages allow you to configure:

- Exceptions - direct the actions that are taken when specific requests cannot be processed correctly by the system
- System Options - determines actions taken when GLA is unavailable, as well as how the Realm and Fully Qualified Domain Name are applied to the answer message
- Alarm Settings - set alarm thresholds

GLA Exceptions

GLA allows the configuration of exceptions to manage object attributes for error handling. This enables the configuration of error answers, which provide information on the result code, vendor ID, and the appropriate error message for each condition.

The following exception types are supported:

- Decode Error
- Unknown Application ID
- Unknown Command Code
- IMSI and MSISDN Present
- IMSI and MSISDN Absent
- pSBR-B Query Failure
- pSBR-B Query Timeout
- Resource Exhausted
- Unable to Process

Configure GLA Exceptions elements

This table describes the elements for configuring GLA error exceptions:

Table 8: Configure GLA Exception Elements

Element	Description	Data Input Notes
Action	The action to be taken when encountering the specific error.	Format: Radio buttons Range: <ul style="list-style-type: none"> • Discard - Request is discarded and no answer is sent • Answer with Result Code - a Diameter Answer message with the Result-Code AVP is sent to Request's Origin-Host. • Answer with Experimental Result Code - Diameter Answer message with an Experimental-Result AVP is sent to Request's Origin-Host Answer with Experimental Result Code
Result Code	The value displayed in the message if the Action is Answer with Result Code or Answer with Experimental Result Code. Select a Result Code from the listing provided or enter a specific code.	Format: Pulldown list Range: 1000-5999
Vendor ID	The vendor ID displayed in the Experimental-Result pair if the Action is Answer with Experimental Result Code.	Format: Text box Range: 1 - 4294967295
Error String	The text string appended to the Error-Message AVP.	Format: Text box Range: 0 to 64 characters

Configuring GLA Exceptions

Use this task to configure exceptions for GLA. Exceptions direct the actions that are taken when specific requests cannot be processed correctly by the system.

The steps below apply to any exception code listed on the GLA Exceptions page. All individual exception codes can be updated independently using these steps.

1. Select **GLA > Configuration > Exceptions**.

The **GLA > Configuration > Exceptions** page appears with a list of configured exception attributes.

The fields are described in [Configure GLA Exceptions elements](#).

2. Select an Action from the available options. Valid options are:
 - Discard - the request is discarded and no answer is sent
 - Answer with Result Code - an answer message with the Result Code AVP is sent to the request originator
 - Answer with Experimental Result Code - an answer message with an Experimental Result Code AVP is sent to the request originator
3. Enter a Result Code or select one from the listing. If Discard is selected for the Action, this field is grayed out. If the Action is other than Discard, the result code is sent with the exception answer.
4. Enter a Vendor ID. This field is activated only if you selected Answer with Experimental Result Code for the Action. This value will be sent with the experimental/result pairing.
5. Enter an Error String to be appended to the error/message pairing sent with the answer message.
6. Click:
 - **Apply** to save the Exception changes and refresh the page to show the changes.
 - **Cancel** to discard the changes and refresh the page.

If **Apply** is clicked and any of the following conditions exist, an error message appears:

- Any fields contain a value that contains invalid characters or is out of the allowed range.
- Any required field is empty (not entered).
- A **Result Code** value is not set when **Answer With Result Code** or **Answer With Experimental Result Code** is selected.
- An **Vendor ID** value is not set when **Answer With Experimental Result Code** is selected.

GLA System Options

GLA allows the configuration of system options. Setting options allows you to determine actions taken when GLA is unavailable, as well as how the Realm and Fully Qualified Domain Name are applied to the answer message.

The system options set include:

- Realm
- Fully Qualified Domain Name
- Application Unavailable Action
- Application Unavailable Route List
- Application Unavailable Result-Code
- Application Unavailable Error Message
- Application Unavailable Vendor-Id

Configure GLA System Options elements

This table describes the elements for configuring GLA system options:

Table 9: Configure GLA System Options Elements

Element	Description	Data Input Notes
Realm	<p>A list of alphanumeric labels (a label is 1-63 characters, and may contain letters, digits, dashes and underscore) separated by dots (.). A label must start with a letter, digit or underscore and must end with a letter or digit.</p> <p>This value is placed in the Origin-Realm AVP of the Answer message generated by GLA.</p> <p>A Fully Qualified Domain Name is required to configure the Realm.</p>	<p>Format: Alphanumeric (A-Z, a-z, 0-9), dash (-) and underscore (_) characters. Not case-sensitive.</p> <p>Range: Maximum of 255 characters.</p>
Fully Qualified Domain Name	<p>A list of alphanumeric labels (a label is 1-63 characters, and may contain letters, digits, dashes and underscore) separated by dots (.). A label must start with a letter, digit or underscore and must end with a letter or digit.</p> <p>This value is placed in the Origin-Realm AVP of the Answer message generated by GLA.</p> <p>A Realm is required to configure Fully Qualified Domain Name.</p>	<p>Format: Alphanumeric (A-Z, a-z, 0-9), dash (-) and underscore (_) characters. Maximum of 255 characters. Not case-sensitive.</p> <p>Range: Maximum of 255 characters.</p>
Application Unavailable Action	<p>Action to be taken when GLA application is unavailable to process messages.</p>	<p>Format: Radio button</p> <p>Range: Valid responses</p> <ul style="list-style-type: none"> • Continue Routing • Default Route • Send Answer with Result-Code pair • Send Answer with Experimental-Result AVP • Discard
Application Unavailable Route List	<p>Route List used to route requests when Unavailability Action is 'Default Route' and GLA application is not available. Using a route list bypasses the Peer Routing Rules.</p>	<p>Format: Drop down list</p> <p>Range: Available Route Lists</p>

Element	Description	Data Input Notes
Application Unavailable Result-Code	The Result-Code or Experimental-Result-Code value returned in an Answer message when a message is not successfully routed because the GLA application is unavailable. If Vendor-Id is configured, this value would be included with the Experimental-Result Code AVP in the Answer message.	Format: Radio Button/Drop down list Default: 3002 Range: 1000 - 5999
Application Unavailable Error Message	The Error-Message AVP value returned in an Answer message when a message is not successfully routed because the GLA application is not unavailable.	Format: Text box Default: GLA Unavailable Range: 0 to 64 characters
Application Unavailable Vendor-Id	The Vendor-Id AVP value returned in an Answer message when a message is not successfully routed because the GLA application is unavailable. If Vendor-Id is configured, this value would be included with the Experimental-Result Code AVP in the Answer message.	Format: Text box Default: N/A Range: 1 to 4294967295

Configuring GLA System Options

Use this task to configure system options for GLA.

1. Select **GLA > Configuration > System Options.**

The **GLA > Configuration > System Options** page appears with a list of system attributes.

The fields are described in [Configure GLA System Options elements](#).

2. Enter a Realm (optional). A Fully Qualified Domain Name is required for this value to be configured, and this value becomes part of the origin/realm pairing in the Answer message. If a realm is not configured, DSR uses the local node information for Answers.
3. Enter a Fully Qualified Domain Name (optional). A Realm is required for this value to be configured. If a FQDN is not configured, DSR uses the local node information for Answers.
4. Select an Application Unavailable Action from the available choices. This determines the action to be taken by the system is the application is unavailable. Valid options are:
 - Continue Routing
 - Default Route
 - Send Answer with Result-Code AVP

Gateway Location Application Configuration

- Send Answer with Experimental-Result AVP
 - Discard
5. Select the Application Unavailable Route List. This option is only available if Default Route is selected as the Unavailable Action, enabling the selected route list to be used when the application is unavailable.
 6. Select the Application Unavailable Result-Code. This option is only available if Send Answer with Result-Code AVP or Send Answer with Experimental-Result AVP are selected as the Unavailable Action. This option determines the message returned in an Answer message when the application is unavailable.
 7. Select the Application Unavailable Error Message. This option is only available if Send Answer with Result-Code AVP or Send Answer with Experimental-Result AVP are selected as the Unavailable Action. This option determines the error/message pair returned in an Answer message when the application is unavailable.
 8. Select the Application Unavailable Vendor ID. This option is only available if Send Answer with Experimental-Result AVP is selected as the Unavailable Action. This option determines the vendor/ID pair returned in an Answer message when the application is unavailable.
 9. Click:
 - **Apply** to save the System Options changes and refresh the page to show the changes.
 - **Cancel** to discard the changes and refresh the page.

If **Apply** is clicked and any of the following conditions exist, an error message appears:

- Any fields contain a value that contains invalid characters or is out of the allowed range.
- Any required field is empty (not entered).
- An **Application Unavailable Route List** value is not set when **Default Route** is selected.
- An **Application Unavailable Result-Code** value is not set when **Send Answer with Result-Code AVP** or **Send Answer with Experimental-Result AVP** is selected.
- An **Application Unavailable Vendor ID** value is not set when **Send Answer with Experimental-Result AVP** is selected.

GLA Alarm Settings

GLA allows the configuration of alarm thresholds. These thresholds are used to generate notifications concerning the ingress message rates for the application.

Alarm thresholds may be set for the following limits:

- Critical Alarm Clear
- Critical Alarm Threshold
- Major Alarm Clear
- Major Alarm Threshold
- Minor Alarm Clear
- Minor Alarm Threshold

Configure GLA Alarm Settings elements

This table describes the elements for configuring a GLA Alarm Setting:

Table 10: Configure GLA Alarm Settings Elements

Element	Description	Data Input Notes
Critical Alarm Threshold (Percent)	GLA ingress message rate threshold for this alarm to be raised as a severity Critical. The threshold is expressed as a percentage of the Ingress Message Capacity.	Default: 95 Range: 1 to 99
Critical Alarm Clear (Percent)	GLA ingress message rate clear for this alarm to be raised as a severity Critical. The threshold is expressed as a percentage of the Ingress Message Capacity.	Default: 90 Range: 1 to 99
Major Alarm Threshold (Percent)	GLA ingress message rate threshold for this alarm to be raised as a severity Major. The threshold is expressed as a percentage of the Ingress Message Capacity.	Default: 80 Range: 1 to 99
Major Alarm Clear (Percent)	GLA ingress message rate clear for this alarm to be raised as a severity Major. The threshold is expressed as a percentage of the Ingress Message Capacity.	Default: 70 Range: 1 to 99
Minor Alarm Threshold (Percent)	GLA ingress message rate threshold for this alarm to be raised as a severity Minor. The threshold is expressed as a percentage of the Ingress Message Capacity.	Default: 60 Range: 1 to 99
Minor Alarm Clear (Percent)	GLA ingress message rate clear for this alarm to be raised as a severity Minor. The threshold is expressed as a percentage of the Ingress Message Capacity.	Default: 50 Range: 1 to 99

Configuring GLA Alarm Settings

Use this task to configure alarm settings for GLA.

1. Select **GLA > Configuration > Alarm Settings**.

The **GLA > Configuration > Alarm Settings** page appears with a list of alarm attribute percentages.

The fields are described in [Configure GLA Alarm Settings elements](#).

2. Select a value for the **Critical Alarm Threshold** percent. This determines the ingress message rate threshold for this alarm to be raised as Critical. The default is 95 percent.
3. Select a value for the **Critical Alarm Clear** percent. This determines the ingress message rate clear for this alarm to be raised as Critical. The default is 90 percent.
4. Select a value for the **Major Alarm Threshold** percent. This determines the ingress message rate threshold for this alarm to be raised as Major. The default is 80 percent.
5. Select a value for the **Major Alarm Clear** percent. This determines the ingress message rate clear for this alarm to be raised as Major. The default is 70 percent.
6. Select a value for the **Minor Alarm Threshold** percent. This determines the ingress message rate threshold for this alarm to be raised as Minor. The default is 60 percent.
7. Select a value for the **Minor Alarm Clear** percent. This determines the ingress message rate clear for this alarm to be raised as Minor. The default is 50 percent.
8. Click:
 - **Apply** to save the Alarm Settings changes and refresh the page to show the changes.
 - **Cancel** to discard the changes and refresh the page.

If **Apply** is clicked and any of the following conditions exist, an error message appears:

- Any fields contain a value that contains invalid characters or is out of the allowed range.
- A **Critical Alarm Clear** value is greater than the **Critical Alarm Threshold**.
- A **Major Alarm Clear** value is greater than the **Major Alarm Threshold**.
- A **Minor Alarm Clear** value is greater than the **Minor Alarm Threshold**.
- A **Major Alarm Threshold** value is greater than the **Critical Alarm Clear** or **Critical Alarm Threshold**.
- A **Minor Alarm Threshold** value is greater than the **Major Alarm Clear** or **Major Alarm Threshold**.

Post-Configuration Activities

After GLA configuration is complete, the following activities need to be performed to make the GLA application fully operational in the system:

- Enable GLA on the DA-MPs that will be processing traffic.
- Verify that GLA comes into service in the Normal state
- Verify that the Application Routing Table that has GLA rules will be used for traffic arriving from Gateway Query Clients
- Enable any connections that will carry GL traffic and verify they are in-service.

Enable the GLA

Use this task to enable GLA. For each Active SOAM,

1. Select **Diameter > Maintenance > Applications**.

The **Diameter > Maintenance > Applications** page appears.

2. Under **DSR Application Name**, select each **GLA** row.
To select more than one row, press and hold **Ctrl** while you click each row.
3. Click **Enable**.
4. Verify the application status on the page.
The **Admin State**, **Operational Status**, **Operational Reason**, and **Congestion Level** in each of the selected rows should change respectively to **Enabled**, **Available**, **Normal**, **Normal**.

ComAgent and PSBR Status Verification

Use the following task to verify ComAgent and PSBR status after configuration is complete.

1. Verify Communication Agent (ComAgent) HA Services Status.
 - a) At the Active NOAM, select **Communication Agent > Maintenance > Connection Status**.
 - b) Verify that **Resource Routing Status** is **Available** for all listed **User/Provider** entries.
2. Verify the ComAgent Automatic Connection Status.
 - a) At the Active NOAM, select **Communication Agent > Maintenance > Ha Services Status**
 - b) Verify that **Automatic Connection Count** is **X of Y In Service**, where $Y \geq X$ and $X = Y$ indicate successful Automatic Connection setup.
3. Verify Policy SBR Status.
 - a) At the Active NOAM, select **Policy DRA > Maintenance > Policy SBR Status**.
 - b) Verify that the server **Resource HA Role** is **Active/Standby/Spare** and **Congestion Level** is **Normal** for all Servers in each Server Group in the Binding Region and Mated Site tab entries.

Verify Application Route Table

Use the following task to verify that the Application Routing Table that includes GLA rules is used for traffic arriving from Gateway Query Clients.

1. At the Active SOAM, select **Diameter > Configuration > Application Route Tables**.
The **Diameter > Configuration > Application Route Tables** page appears.
2. Verify that there is an Application Route Table and Rules set up for GLA. If no table and rules exist, refer to the *DSR Administration Guide*.
3. Select GLA from the Application Route Table and select **View/Edit Rules**.
The Viewing Rules for Application Route Table: GLA page appears.
4. Select the available rules from the table and select **Edit**.
The Viewing Rules for Application Route Table: GLA page appears.
5. Examine the Application Routing Rules that direct traffic to GLA and verify that the Application-Id is configured as GL (16777321) and the Command-Code is configured as GGR (8388655) for all Application Routing Rules referring to GLA.
Once all information is verified, select OK or Cancel to navigate away from the Viewing Rules for Application Route Table: GLA page.

Enable GLA Query Client Connections

Use the following task to enable one or more GLA Query Client connections to Peer Nodes.

1. At the Active SOAM, select **Diameter > Maintenance > Connections**.

The **Diameter > Maintenance > Connections** page appears.

2. Select 1 - 20 connections to enable.

To select multiple connections, press and hold the Ctrl key while you select each connection.

To select multiple contiguous connections, click the first connection you want, press and hold the Shift key, and select the last connection you want. All the connections between are also selected.

3. Click **Enable**.

A confirmation box appears.

4. Click **OK**.

The selected connections are enabled.

If any of the selected connections no longer exist (they have been deleted by another user), an error message is displayed, but any selected connections that do exist are enabled.

5. Verify Connection status on the page.

Verify that the **Admin State** of all connections changes to Enabled and the Operational Reason shows Connecting for connections to PCRF nodes and Listening for connections to other nodes (such as policy clients - PCEF, AF, and others). nodes.

For connections of type Responder Only (Policy Client nodes), the **Operational Status** and **Operational Reason** will be "Unk" if IPFE TSA connections are used.

DSR Bulk Import and Export

The following documents describe the use and operation of DSR Bulk Import and Export functions:

- *Diameter Common User's Guide*,
- **Help > Diameter Common > DSR Bulk Import**
- **Help > Diameter Common > DSR Bulk Export**

The DSR Bulk Import and Export functions can be used to export Diameter, IPFE, and DSR Application configuration data in CSV files to a location outside the system, and to import the files (usually edited) into the system where the Import function is executed.

DSR Bulk Import

The DSR Bulk Import operations use configuration data in ASCII Comma-Separated Values (CSV) files (.csv), to insert new data into, update existing data in, or delete existing data from the configuration data in the system.

Note: Some configuration data can be imported only with the Update operation, and other data can be imported with Insert and Delete operations but not Update. Refer to the *Diameter Common User's Guide* or the **Diameter Common > Import Help** for valid Import operations.

Import CSV files can be created by using a DSR Bulk Export operation, or can be manually created using a text editor.

Note: The format of each Import CSV file record must be compatible with the configuration data in the DSR release that is used to import the file.

Files that are created using the DSR Bulk Export operation can be exported either to the local Status & Manage File Management Directory (**Status & Manage > Files** page), or to the local Export Server Directory.

CSV files that are in the local File Management area can be used for Bulk Import operations on the local system.

Files can be created manually using a text editor on a computer; the files must be uploaded to the File Management area of the local system before they can be used for Import operations on the local system.

The following Import operations can be performed:

- Insert new configuration data records that do not currently exist in the system
- Update existing configuration data in the system
- Delete existing configuration data from the system

Each Import operation creates a log file. If errors occur, a Failures CSV file is created that appears in the File Management area. Failures files can be downloaded, edited to correct the errors, and imported to successfully process the records that failed. Failures files that are unchanged for more than 14 days and log files that are older than 14 days are automatically deleted from the File Management area.

DSR Bulk Export

The DSR Bulk Export operation creates ASCII Comma-Separated Values (CSV) files (.csv) containing Diameter, IPFE, and DSR Application configuration data. Exported configuration data can be edited and used with the DSR Bulk Import operations to change the configuration data in the local system without the use of GUI pages. The exported files can be transferred to and used to configure another DSR system.

Each exported CSV file contains one or more records for the configuration data that was selected for the Export operation. The selected configuration data can be exported once immediately, or exports can be scheduled to periodically occur automatically at configured times.

The following configuration data can be exported in one Export operation:

- All exportable configuration data in the system
- All exportable configuration data from the selected DSR Application, IPFE, or Diameter (each component's data is in a separate file)
- Exportable configuration data from a selected configuration component for the selected DSR Application, IPFE, or Diameter

Exported files can be written to the File Management Directory in the local File Management area (**Status & Manage > File** page), or to the Export Server Directory for transfer to a configured remote Export Server.

CSV files that are in the local File Management area can be used for Bulk Import operations on the local system.

If the export has any failures or is unsuccessful, the results of the export operation are logged to a log file with the same name as the exported file but with a ".log" extension. Successful export operations will not be logged.

C

ComAgent

Communication Agent

A common infrastructure component delivered as part of a common plug-in, which provides services to enable communication of message between application processes on different servers.

D

DA-MP

Diameter Agent Message Processor

A DSR MP (Server Role = MP, Server Group Function = Diameter Signaling Router). A local application such as CPA can optionally be activated on the DA-MP. A computer or blade that is hosting a Diameter Signaling Router Application.

DSR

Diameter Signaling Router

A set of co-located Message Processors which share common Diameter routing tables and are supported by a pair of OAM servers. A DSR Network Element may consist of one or more Diameter nodes.

G

GGA

Get-Gateway-Answer A reply to a GGR. It contains session information for the subscriber present in the GGR. GGA includes the bindings for the subscriber such as, Access Point Name, PCEF FQDN and Creation timestamp. The session information is

G

aggregated in the GGA based on the PCRF to which is it assigned.

GGR	Get-Gateway-Request A request for information for either an IMSI or an MSISDN. Only one subscriber (IMSI or MSISDN) is allowed to be queried per GGR. The GGR is generated by the GQC.
GQC	Gateway Query Client also known as Diameter Node
GQS	Gateway Query Server also known as DSR
GUI	Graphical User Interface The term given to that set of items and facilities which provide the user with a graphic means for manipulating screen data rather than being limited to character based commands.

N

NOAM	Network Operations, Administration, and Maintenance
------	---

P

Policy DRA	Policy Diameter Relay Agent. A scalable, geo-diverse DSR application that creates a binding between a subscriber and a PCRF, and routes all policy messages for a given subscriber to the PCRF that currently hosts that subscriber's policy rules. Policy DRA is capable of performing Topology Hiding to hide the PCRF from the Policy Client.
------------	--

P

pSBR

Policy SBR

S

SOAM

System Operations,
Administration, and Maintenance

T

TSA

Target Set Address

An externally routable IP address that the IPFE presents to application clients. The IPFE distributes traffic sent to a target set address across a set of application servers.