



March 2016

Oracle[®] Communications Performance Intelligence Center 10.2

Feature Guide

E72800 Revision 1

- Table of Contents -

1	INTRODUCING OCPIC	6
1.1	KEY BENEFITS.....	6
1.2	ORACLE'S SOLUTION	6
2	OCPIC PRODUCT OVERVIEW	8
2.1	DATA ACQUISITION LAYER	8
2.2	MEDIATION LAYER	10
2.3	APPLICATIONS LAYER.....	10
2.4	RELIABILITY	11
2.5	BACKUP CAPABILITIES	11
2.6	MONITORED INTERFACES	12
3	DETAILED TECHNICAL DESCRIPTION.....	21
3.1	OCPIC MANAGEMENT.....	22
3.2	OCPIC MANAGEMENT OPTIONAL APPLICATIONS.....	32
3.3	OCPIC MEDIATION.....	50
3.4	OCPIC MEDIATION DATA FEED	56
3.5	OCPIC DATA ACQUISITION	58
3.6	OCPIC VIRTUALIZED CONFIGURATIONS SUMMARY.....	68
4	APPENDIX A – OCPIC APPLICATION VS. OCPIC ORACLE LICENCES.....	69
5	APPENDIX B –ACRONYMS.....	71
6	APPENDIX C – LIST OF SUPPORTED PROTOCOLS	76

-List of Figures -

Figure 1 – Oracle Communications Performance Intelligence Center.....	7
Figure 2 - OCPIC architecture	8
Figure 3 – OCDSR Integrated Acquisition.....	10
Figure 4 - PSTN monitored interfaces	12
Figure 5 - NGN and VoIP monitored interfaces	13
Figure 6 - GSM/GPRS/3G monitored interfaces	13
Figure 7 - CDMA monitored interfaces	16
Figure 8 - IMS monitored interfaces	17
Figure 9 - LTE/SAE monitored interfaces	17
Figure 10 - OCPIC building blocks	21
Figure 11 - OCPIC Management applications	22
Figure 12 - OCPIC Management applications security configuration	24
Figure 13 - Data privacy	25
Figure 14 - OCPIC Management KPI application main screen	26
Figure 15 - OCPIC Management KPI application configuration column edition example	26
Figure 16 - OCPIC Management KPI application configuration measure edition example	26
Figure 17 - Example of filtering capabilities.....	27
Figure 18 - Possible lines definition	27
Figure 19 - Example of alarm definition.....	28
Figure 20 - System alarm main screen.....	29
Figure 21 – Audit viewer example	29
Figure 22 – Capacity management scope	30
Figure 23 – MAP builder configuration for anonymous SMS	31
Figure 24 – OCPIC Multiprotocol Troubleshooting main window for XDR, PDU and protocol	31
Figure 25 - Extended filtering capability	33
Figure 26 - OCPIC XDR viewer overview	33
Figure 27 - Example OCPIC XDR viewer output	34
Figure 28 - OCPIC Multiprotocol Troubleshooting screen capture.....	35
Figure 29 - Example of OCPIC Multiprotocol Troubleshooting output.....	36
Figure 30 - Ladder diagram	36
Figure 31 - Example of OCPIC Dashboard output	37
Figure 32 - Example of OCPIC Network and Service Alarm output.....	38
Figure 33 - Drill-down from OCPIC Network and Service Alarm KPI Alarm to OCPIC Dashboard or to OCPIC XDR browser.....	38
Figure 34 - Table display of KPI from OCPIC Network and Service Alarm drill down	39
Figure 35 - XDR analysis and protocol decoding from OCPIC Network and Service Alarm drill down	39
Figure 36 - Example of alarm forwarding filters	40
Figure 37 - Example of alarm forwarding configuration for destination	40
Figure 38 - Example of alarm forwarding configuration for filtering.....	41
Figure 39 - OCPIC SS7 Management Architecture	42
Figure 40 - Linkset view.....	43
Figure 41 – SS7 Management SIGTRAN main screen	44
Figure 42 - Q.752 counters supported	47
Figure 43 - Q.752 alarm threshold	47
Figure 44 - OCPIC Mediation.....	50
Figure 45 - OCPIC Mediation subsystem overview	51
Figure 46 – Data Records and Packet Data Units Storage on Customer IT storage infrastructure.....	53
Figure 47 - Static XDR enrichment principle	54
Figure 48 – Automatic static enrichment update	55

Figure 49 - OCPIC Mediation Data Feed	56
Figure 50 – OCPIC Acquisition Data Feed Architecture	57
Figure 51 – OCPIC Acquisition Architecture.....	58
Figure 52 - OCPIC Integrated Acquisition Architecture.....	59
Figure 53 - IP Raw & MSU	60
Figure 54 - EAGLE Frame to Integrated Acquisition connection.....	61
Figure 55: APP-B in the EAGLE frame.....	62
Figure 56 - Overview of OCPIC Probed Acquisition	62
Figure 57 – LSL/HSL to SIGTRAN Converters.....	64
Figure 58 – LSL/HSL to SIGTRAN Converters – connectivity	64
Figure 59 – Gb over E1 to Gb over IP Converter	65
Figure 60 – Pcap capture for OCPIC Probed Acquisition	66
Figure 61 – OCDSR Integrated Acquisition.....	67
Figure 62 – OCPIC Virtualized Configurations Summary	68

-List of Tables –

Table 1 – SMS Hiding.....	30
Table 2 – SMS decoding per user’s authorization.....	31
Table 3 – Field hiding per user’s authorization.....	32
Table 5 - OCPIC Probed Acquisition feature supported matrix	63
Table 6 – OCPIC Part Numbers and Legacy Names.....	69
Table 7– List of acronyms	71
Table 8 - List of supported protocols and builders	76

1 INTRODUCING OCPIC

1.1 KEY BENEFITS

In a tough competitive landscape CSPs need to implement new technologies while optimizing their cost. LTE is in their radar screen since a while now, but it is deployed based on economical and regulatory drivers and requires still a lot of efforts. Frequently LTE coverage is partial and it is needed to rely still on 3G when not 2G. Therefore network complexity is growing while price pressure is higher than ever.

In order to drive securely their daily tasks and make the right decisions CSPs need to thoroughly oversee their core network, with flexible tools delivering visibility and allowing to smoothly transition services from 3G/2G to LTE.

With no doubts there is a high value in the data that CSPs are managing and signaling can be monetized. From that point of view, a monitoring solution that can flexibly feed external application becomes a new applications enabler and helps to generate revenue differently than from traditional subscriptions.

1.2 ORACLE'S SOLUTION

Oracle Communications Performance Intelligence Center (OCPIC) is a comprehensive suite of applications, which provides an in-depth understanding of the network and equips wireline and wireless CSPs with the tools required to make informed business investment and cost reduction decisions.

OCPIC provides a set of tools needed to capture network traffic data and convert it into useful business intelligence for troubleshooting, managing traffic, services and QoS metrics in a flexible manner.

OCPIC provides reliable real-time or historic information based on the most important source of service provider revenue – network signaling traffic. OCPIC collects signaling data extracted from the network using carrier-grade platforms dedicated to this purpose. This data is correlated and processed to provide network, service, and subscriber information -- information that is critical to optimize revenue, increase profitability, reduce churn, deploy new services, and manage network migration.

OCPIC is designed to meet the needs of many functions within the CSP's organization, including network operations, customer care, troubleshooting, roaming, marketing, revenue assurance, fraud, finance, business development, and security.

OCPIC is network equipment vendor independent and can be deployed basically on any type of network, (GSM, CDMA, 3G /LTE/EPC, fixed) regardless of the core network vendor. OCPIC is a non-intrusive monitoring system, and as such does not use any resources from network elements.

Service providers use OCPIC to manage interconnection agreements, increase roaming revenue, ensure end-to-end QoS across the network, detect fraud, analyze subscriber behavior, and examine service usage. Moreover OCPIC is of great help in supporting existing applications such as fraud management, interconnect accounting, or assessing service level agreements with key interconnect partners or high value accounts. Support of above services is being provided in a seamless manner across customer's wireline VoIP networks and wireless LTE, IMS and 3G facilities.

The OCPIC set of applications helps leverage raw network traffic data into business/service-oriented triggers such as key performance indicators (KPIs), trends, alarms and statistics. The OCPIC platform is built using open interfaces and a Web-based graphical user interface, ensuring ease of use.

OCPIC features extended integration with the EAGLE, offering an industry unique feature , made of a carrier grade probeless signaling data acquisition module. OCPIC can also be deployed as a standalone solution with probes, or even in a mixed mode , which reduces operational expenses and allows CSPs to scale more quickly.

The OCPIC platform supports major industry protocols such as,

- SS7/SIGTRAN (ISUP, MAP, IS41, INAP, CAP...),
- VoIP/NGN (SIP, H.323, H.248, MGCP...),
- GPRS (Gn, Gi, Gb...) UMTS (IuPS, IuCS)
- SAE/LTE and Diameter (Diameter interfaces , GTPv2, S1C...).

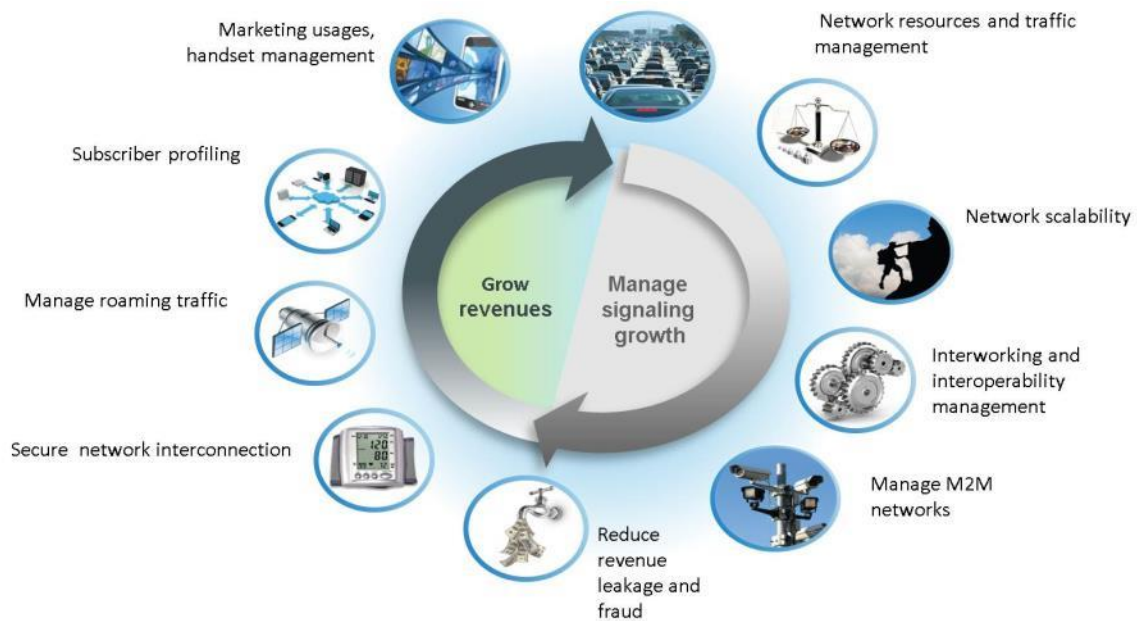


Figure 1 – Oracle Communications Performance Intelligence Center

Focused on performance management, OCPIC provides applications to address troubleshooting, surveillance, and the creation of key performance indicators (KPIs).

2 OCPIC PRODUCT OVERVIEW

The architecture has 3 building blocks: Data acquisition and collection, mediation and applications. Data acquisition can be deployed into the service providers network using signaling interconnect points. The correlation and storage and applications platform are a powerful application processing engine enabling the user to derive “visibility” into traffic transiting their network.

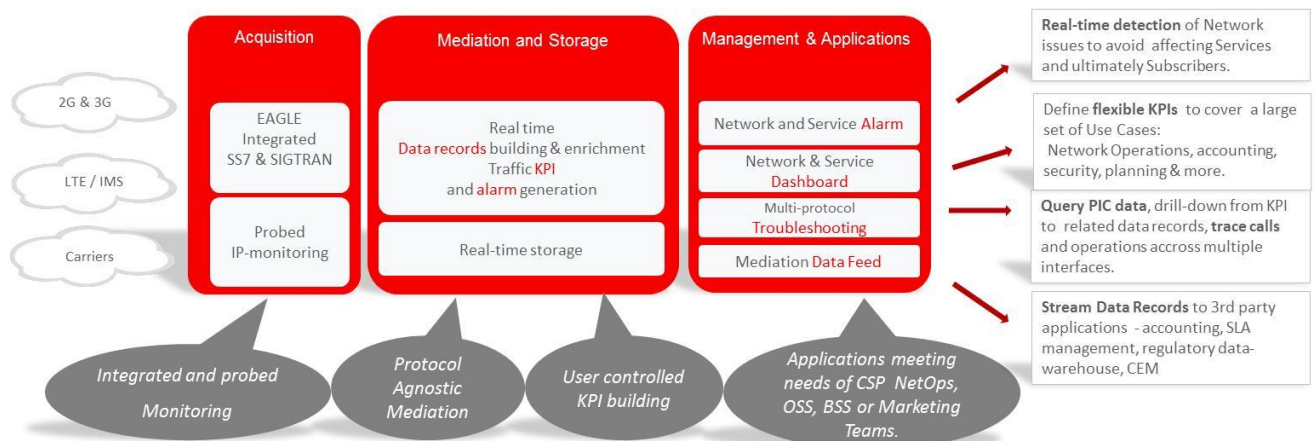


Figure 2 - OCPIC architecture

*Due to rebranding the applications and system elements have been renamed. Please refer to Appendix A – OCPIC APPLICATION VS. OCPIC ORACLE LICENCES for the correspondence.

2.1 DATA ACQUISITION LAYER

It is this layer of the architecture that collects the signaling data from across a network. Equipment is deployed that adapts to the customer network physical interface.

The main functions at this layer are:

- Network adaptation
- Frame capture
- Frame time stamping
- Frame filtering
- Frame routing

Two types of data acquisition is supported with OCPIC: probeless meaning integrated with Core Service nodes as EAGLE, and stand-alone.

2.1.1 Integrated Acquisition

The OCPIC Integrated Acquisition receives the messages and events from the EAGLE and serves as a local processor for the acquisition and short term buffering of collected traffic. The OCPIC Integrated Acquisition provides reliable connectivity to all links supported on the EAGLE. Through the interface between the Eagle and the OCPIC Integrated Acquisition server, the Eagle configuration information is communicated to OCPIC system for simplified provisioning.

2.1.2 Stand-alone Acquisition

Stand-alone Acquisition does support data capture at networks not currently using EAGLE nodes, to capture at IP acquisition points. It requires a passive (non intrusive) probe and is being used to monitor IP based traffic including SIGTRAN, GPRS/UMTS/LTE traffic , Gb interface as well as Iu over IP.

For Ethernet, OCPIC Probed Acquisition supports 4x 1GE ports or 4x 10GE ports. All ports are SFP+ compatible. SFP modules are available for 1000 BASE-T Ethernet, 1000 BASE-SX, 1000BASE-LX, 10G BASE-SR, and 10G BASE-LR.

Stand-alone acquisition is compatible with TAPs and port mirroring.

T1/E1 legacy SS7 links are available through a SIGTRAN converter and Gb over E1 through GboIP converter.

2.1.3 OCDSR Integrated Acquisition

Oracle Communications Diameter Signaling Router (OCDSR) is a comprehensive platform that centralizes routing, traffic management and load balancing, creating an architecture that enables IMS and LTE networks to grow incrementally to support increasing service and traffic demands.

OCPIC features a Diameter monitoring solution integrated to OCDSR. This integrated solution provides compelling advantages as:

- It presents automatic link configuration of OCPIC thanks to configuration automatically forwarded by OCDSR to OCPIC management and configuration application, avoiding time consuming manual configuration in OCPIC.
- It provides enriched data records, on top of the host name (e.g. HSS) captured from the signaling. It enables enhanced troubleshooting with peer node name details showing up in Multi-protocol Troubleshooting application.

OCDSR Integrated Acquisition is based on standalone Acquisition probe as described in §2.1.2.

This configuration is fully dedicated to OCDSR monitoring and only OCDSR Diameter traffic can be monitored by OCDSR Integrated Acquisition probe.

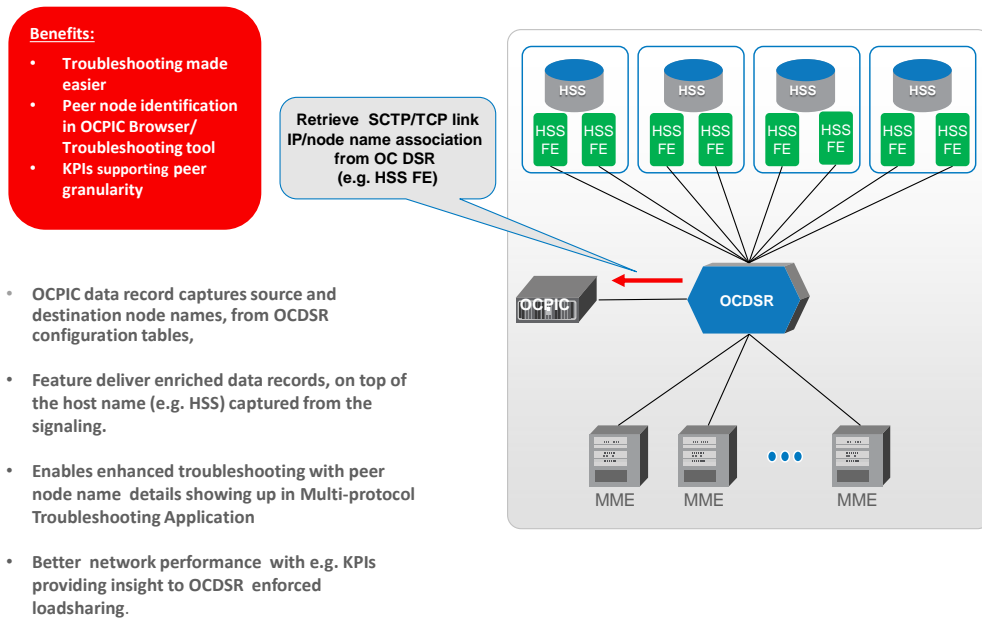


Figure 3 – OCPIC Integrated Acquisition

2.2 MEDIATION LAYER

The correlation and storage subsystem contains a library of signaling XDR protocol builders which correlate in real time signaling messages into XDR depending on protocol. Key performance indicators (KPI) can be defined by the user and are then processed in this portion of the system. These KPI are then provided to the customer in reports and alarms that can be triggered based on thresholds. OCPIC Mediation also manages the storage of raw PDU, XDR and KPI.

For data retention, the XDR storage can support up to 365 days and PDU storage duration is up to 100 days to insure long-term troubleshooting and call analysis. As far as KPI storage is concerned, duration goes up to 2 years, for extended analysis.

It is also possible as an option on a per mediation site basis to store xDR and/or PDU on Customer IT Storage Infrastructure (Cloud). In that case, limits in xDR/PDU/KPI storage duration is only limited by the storage space allocated by the Customer.

Unlike OCPIC internal storage whose access is strictly limited to OCPIC Users and Applications, Databases in Customer IT Storage Infrastructure can be queried by non OCPIC Users and Applications according to access and processing resources allocated by the Customer.

2.3 APPLICATIONS LAYER

OCPIC has a variety of applications which can be combined together for a single point system with multiple business solutions. The cornerstone element is OCPIC Management which enables users to access applications with a web browser interface. In addition, OCPIC system maintenance and data resources are centralized for simplified administration.

A basic system would consist of:

- Centralized configuration management to configure the OCPIC system
- Security application to configure users and profiles to control access to applications and data
- OCPIC Multiprotocol Troubleshooting as OCPIC XDR viewer: Single/multi protocol and single/multi session filtering and decode
- OCPIC Management KPI application: Open KPI generation for ultimate visibility into traffic and resources
- Self-surveillance applications by means of system alarming.

The other applications listed below are optional applications:

- OCPIC SS7 Management: Near real-time SS7 and SIGTRAN network monitoring with stats and state information
- OCPIC Multiprotocol Troubleshooting call tracer: multi-protocol, multi-network message trace and decode
- OCPIC Network and Service Alarm: alarm definition and reporting for OCPIC and network
- OCPIC Network and Service Alarm forward: send alarms to external fault management platform or email addresses
- OCPIC Dashboard: graphical display of KPIs; dashboard creation for output of the OCPIC Management KPI application

Data Export

- Generic export modules used to export XDR/KPI records via NFS or Oracle.

2.4 RELIABILITY

The OCPIC is architected in such a way that if OCPIC Management fails, it will not impact the function of the acquisition and mediation layers of the system. Each component of acquisition and mediation layer has its own configuration data replicated locally from the master database.

Events that were being managed by the failed instance will be re-processed when the instance restarts. However, events being processed by the failed instance will be discarded if the alarm has been terminated otherwise they will be managed by the failed instance when it re-starts.

For the OCPIC Mediation, optional redundancy mechanisms with automatic server failover are provided. This will assure no loss of insertion data in the case of server failure

2.5 BACKUP CAPABILITIES

The OCPIC management provides the ability to backup the following:

- All configuration data for OCPIC Integrated or stand-alone Acquisition and OCPIC Mediation
- All configuration and network topology data associated with all applications
- Application configuration data (OCPIC Dashboard, OCPIC network and service alarm)

The database backup is performed on the OCPIC Management storage array. This backup is scheduled on a daily basis. The last 7 backups are maintained for restore possibility.

There is no XDR/PDU backup/restore. Only alternative is to use export to an external Oracle data warehouse. Backup restore is, in this case under the responsibility of the customer. OCPIC XDR

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS PROPRIETARY AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE WRITTEN PERMISSION OF ORACLE	COPYRIGHT, © ORACLE 2016	Revision: 1.0	Page 11 of 92
--	--------------------------	---------------	---------------

Viewer can be used on top of Oracle Data warehouse. Only XDR and KPI are concerned, no PDU can be backed up by this workaround solution

2.6 MONITORED INTERFACES

OCPIC supports a very broad array of protocols. OCPIC is protocol agnostic. It covers the needs for carriers operating networks that are wireless (CDMA/TDMA, GSM, LTE/EPS), wire line, circuit, or packet based, or a combination of these. Adding new protocols to be supported is accomplished through the addition of protocol builders via a plug-in to cover the new interfaces to monitor, and to adapt platform HW size to process and store added traffic .

This enables the following situations to be handled:

- Monitoring of a CSP's entire SS7 network
- Monitoring on both SS7 and SIP sides of a VoIP gateway used for interconnection with a long-distance VoIP carrier
- Monitoring 2G, 3G and 4G network signaling

The advantages of this architecture are:

- A single system
- Same IP probe as for the widely-deployed SS7, GPRS, UMTS, LTE & VoIP solutions
- No specific training required for IP: the same applications as for SS7 are used
- Ability to easily set traffic statistics & QoS indicators whatever the protocol on the interconnection

The following sections will go through the network collection points available on OCPIC. For a complete list of supported protocols please see Appendix B List of Protocols.

2.6.1 PSTN Networks

For the TDM world the key protocols supported are the following:

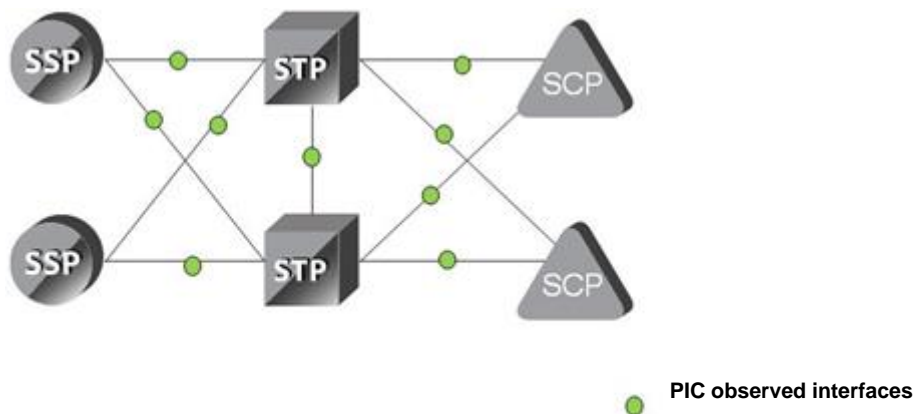


Figure 4 - PSTN monitored interfaces

2.6.2 NGN & VoIP Networks

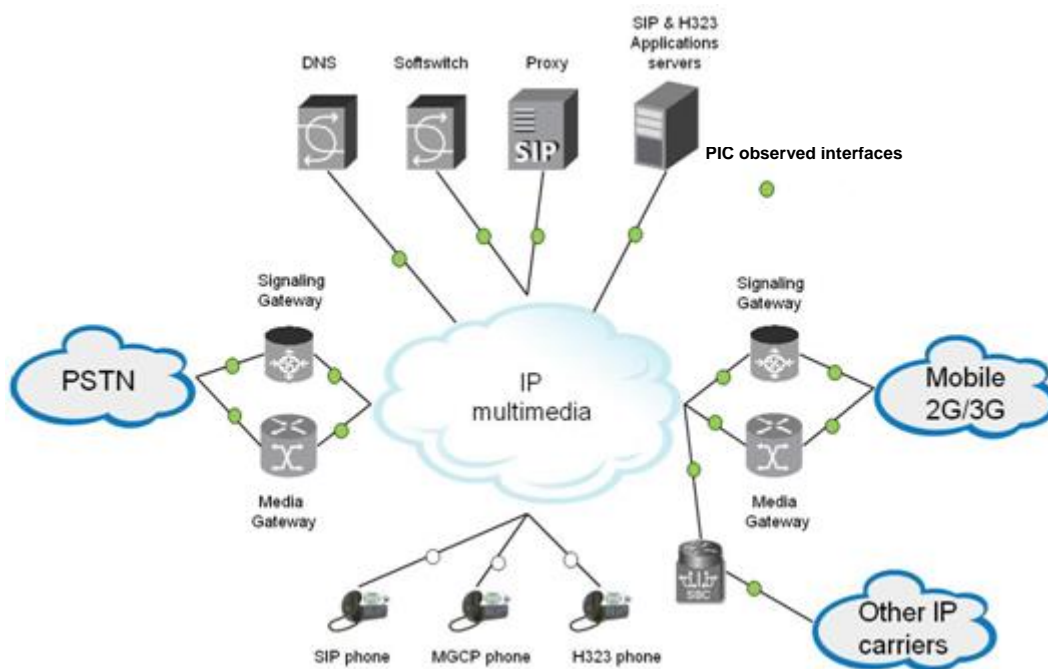


Figure 5 - NGN and VoIP monitored interfaces

2.6.3 GSM/GPRS/3G Networks

The diagram below shows the different interfaces supported for GSM/GPRS/3G networks:

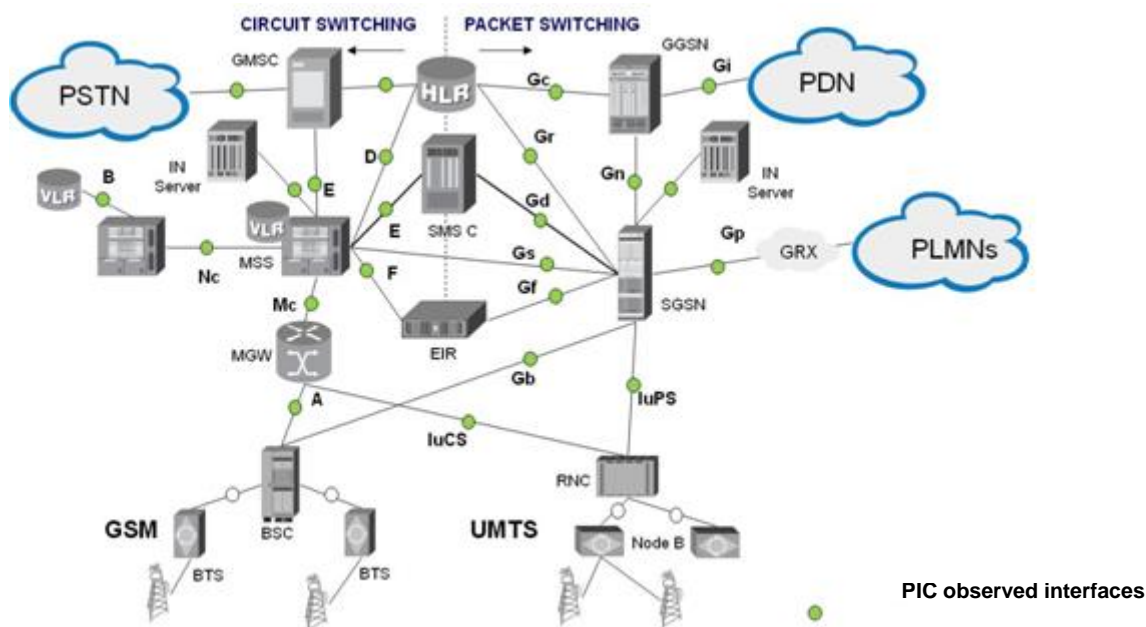


Figure 6 - GSM/GPRS/3G monitored interfaces

This section presents the benefits of monitoring the interfaces supported by OCPIC.

A interface

Degradation can be noticed by subscribers due to mobility, handover, localization and radio problems (for example). Some air interface problems are also easily detected without a need to install probes at all the numerous Abis interfaces.

This interface also carries SMS & USSD information.

B interface

This interface is used to analyze efficiency of VLR management of subscriber mobility.

C interface

This interface is used to analyze efficiency of HLR management of subscriber mobility.

D interface

This interface is used to analyze efficiency of HLR management of subscriber mobility.

E interface

This interface is used to analyze SMS and handover efficiency when a user moves from one MSC to another.

F interface

Handset identification efficiency analysis can be monitored at this interface.

G interface

Location area update procedures data exchanged between VLRs are monitored when using standard MAP protocol.

J interface

Efficiency on user services exchanged between SCP and HLR can be performed at this interface.

Mc interface

Mc is of great interest to be monitored as it gathers information on RAN 2G and 3G interfaces with core network in addition to protocol between MSC server and MGW. Protocols encountered here are BSSAP, RANAP, H.248, Q.931/IUA.

Nc interface

On this interface we will find typically BICC, SIP/I protocol managing calls between MGWs in the network.

Gb Interface

It provides information on:

- Data transport network availability
- Routing and QoS: circuit management, paging, radio status, flow control, flush LL, LLC discard...
- Mobility management efficiency: attach, detach, RA update, PTMSI reallocation, authentication/ciphering...
- Session management efficiency: activation, deactivation, modify PDP context, SMS...

lu-PS and lu-CS interfaces over IP

It enables observation of the following information:

- RNC relocation, RAB management, paging, security...
- Call control – call setup, release...
- Mobility management – attach, detach, RA update, LA update...
- Session management – PDP context activation, deactivation.....
- SMS traffic efficiency
- USSD traffic efficiency

Gn interface

GPRS/UMTS PDP Context management and related QoS

Gp interface

The Gp interface presents the data flow and session management interface with other PLMNs for data roaming in and out.

The same analysis as the one carried out on the Gn interface can be performed.

Gi interface

Radius protocol traffic for authorization and authentication and DHCP for IP address allocation can be observed on Gi interface.

Gr interface (GPRS/UMTS)

This interface allows ciphering parameters capture to decode ciphered Gb and also monitoring of major procedures such as location update, authentication....

Gs interface (GPRS/UMTS)

Gs interface can be used in some cases for efficiency management of the location information and paging related to mobiles that are attached to both GPRS and GSM circuit networks.

Gd interface (GPRS/MAP)

Interface allowing SMS traffic QoS measurement.

Gf interface (GPRS/UMTS)

Interface for handset authentication efficiency measurement.

Gy interface (GPRS/UMTS)

Credit control interface between GGSN and OCS. Enables to control and to trace requested, granted and used service units.

IN/CAMEL interface (GSM/GPRS/UMTS)

Interface for IN server efficiency management (essentially for prepaid and hot billing monitoring)

2.6.4 CDMA Networks

The diagram below shows the different interfaces supported for CDMA networks:

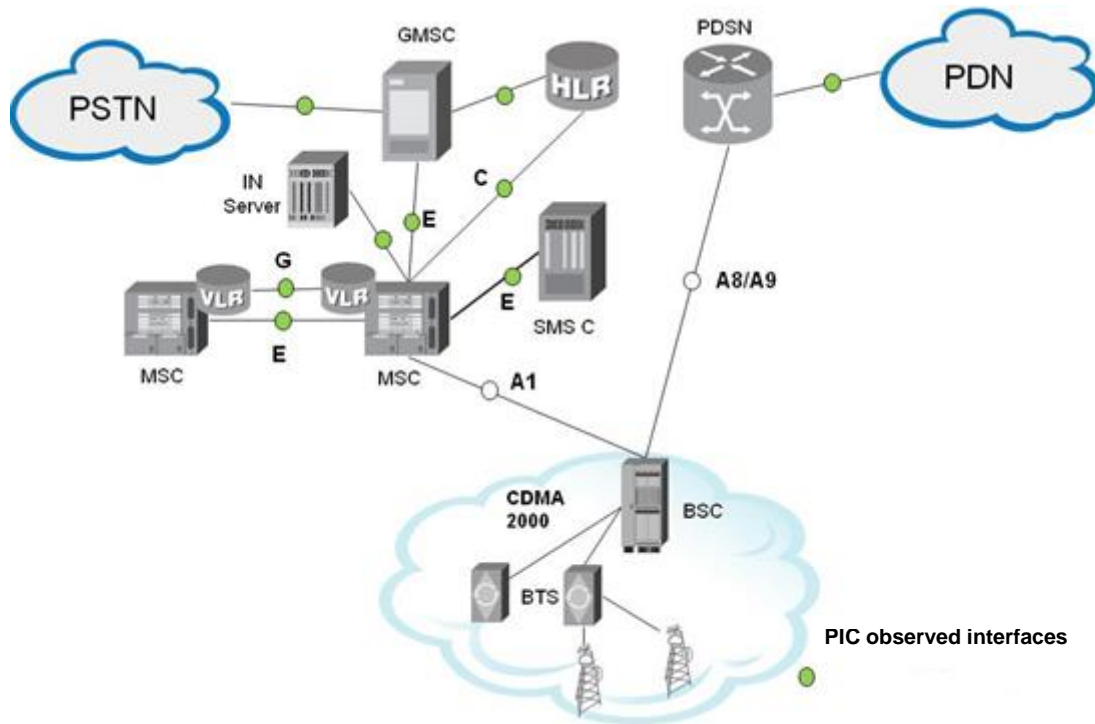


Figure 7 - CDMA monitored interfaces

2.6.5 IMS Networks

The diagram below shows the different interfaces supported for IMS networks:

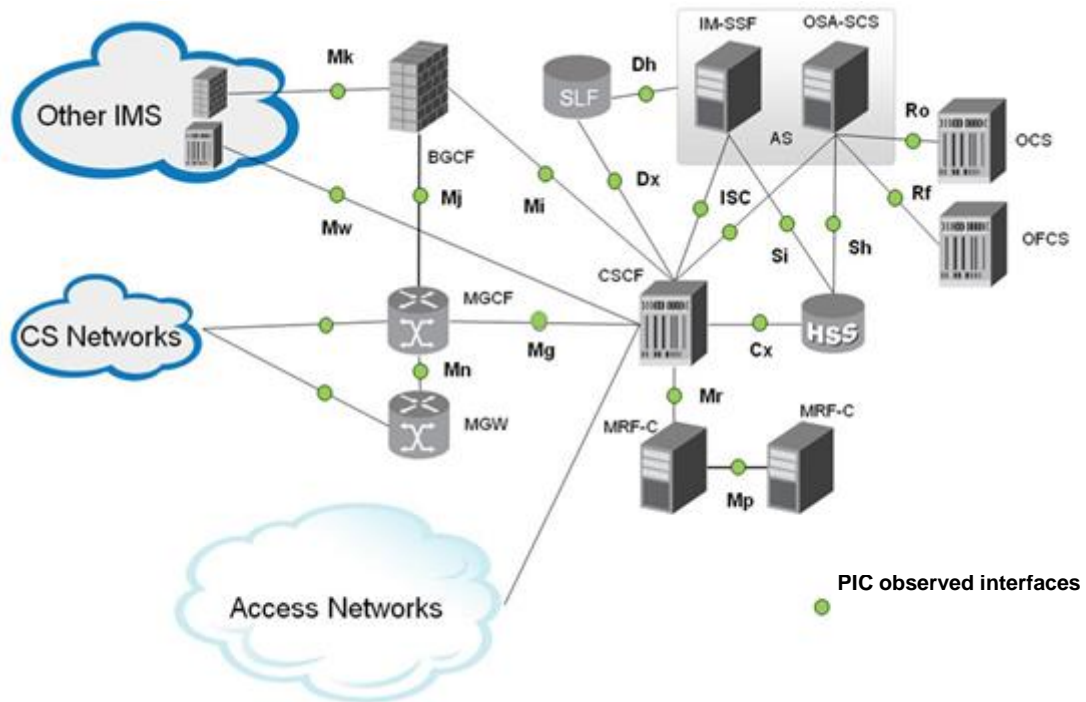


Figure 8 - IMS monitored interfaces

2.6.6 LTE/SAE Networks

The diagram below shows the different interfaces supported for LTE/SAE networks:

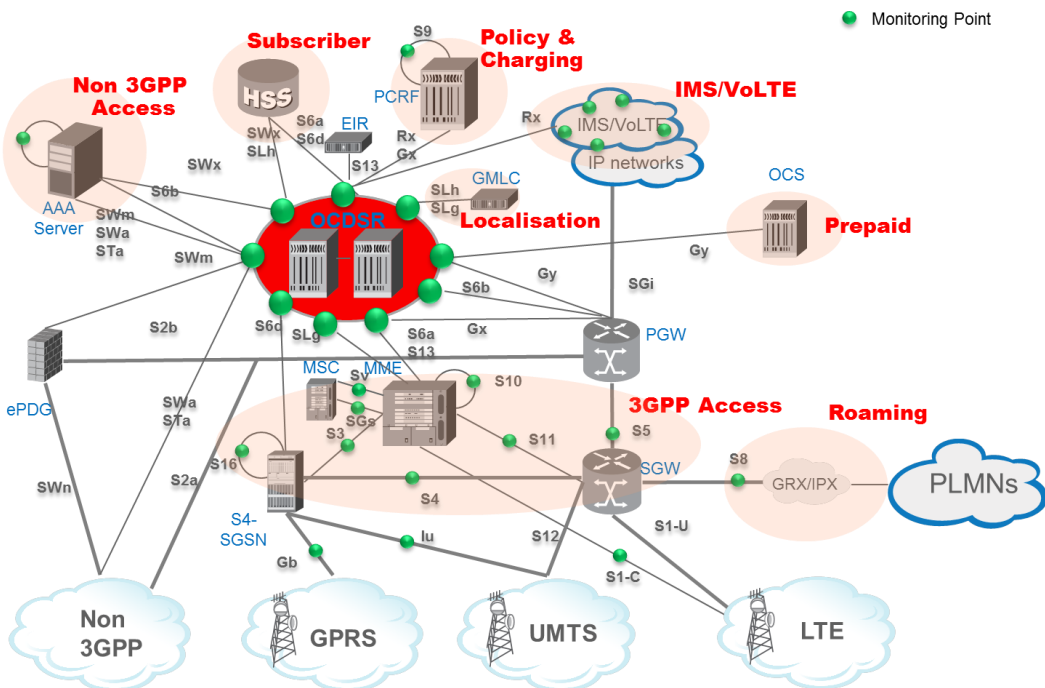


Figure 9 - LTE/SAE monitored interfaces

3GPP ACCESS

S1-C interface non cyphered interface

S1-C is a RAN fundamental interface for monitoring as it provides information on:

- Inter MME handover
- ERAB (establishment, modification, release)
- NAS EMM: mobility management (attach, detach, tracking area update, service request)
- NAS ESM: default/dedicated bearer context activation, modification, deactivation; PDN connect/disconnect request by UE, UE requested bearer resource allocation/modification

GTPv2 C – Tunnel management (S4, S11, S5, S8 interfaces)

GTPv2C tunnel management is dedicated to mainly:

- PDN sessions-default bearer management (create/modify/delete session)
- Dedicated bearer management (create, update, delete)
- UE initiated activate/deactivate bearer resource command
-

GTPv2 C – Mobility Management (S3, S10, S16 interfaces)

GTPv2C is dedicated to mainly:

- Forward relocation (handover, relocation, SRVCC)
- MM/EPS bearers context transfer
- UE identification transfer
- MME/SGSN detach coordination

Among others, monitoring this interface enables to trace all the traffic of a mobile including inter-technology handover, which is very frequent in mobile 4G network and is a big potential source of QoE (Quality of Experience) degradation.

SGs interface

SGs is a critical interface enabling an LTE mobile to setup/receive a call through CSFB (Circuit Switched Fallback) mechanism by the time VoLTE is used by the network.

Sv interface

Sv is a key interface in VoLTE between MME and MSS assuring inter-RAT handover within the critical SRVCC procedure (Single Radio Voice Call Continuity) during an established call. Sv interface monitoring enables to get a full overview of PS to CS and CS to PS handover and IMS session transfer requested further to an SRVCC procedure.

SUBSCRIBER

S6 interface

S6 interface provides information on:

- Location management (update/cancel location)
- Subscriber data
- Authentication

S13 interface

S13 interface is used for tracking stolen handsets

POLICY AND CHARGING

Gy interface

Credit Control interface between GGSN/PGW and OCS. Enables to control and to trace efficiency of request, granted and used service units.

Monitoring this interface provides useful information about credit control process in a multi-service environment.

Gx interface

Gx interface between GGSN/PGW and PCRF is a key interface for flow based charging.

Monitoring Gx provides information on the following processes:

- PGW requests PCC rules from PCRF
- PCRF forwards a PCC rule to PGW
- PGW forwards events to PCRF (e.g. RAT change, end of subscriber credit...)

Rx interface

Rx interface supports the QoS and media resources reservation/modification in VoLTE from IMS network to access network.

ROAMING

S8 interface

S8 interface transports user data in roaming in/out situation. S8-C provides QoS information on PDN session management (create/modify/delete session) and dedicated bearer management (create, update, delete) for roaming IN and OUT.

S9 interface

This interface is the companion interface of Gx interface, supporting monitoring of business sensitive roaming traffic . This interface is required to exchange policy and charging information in roaming situation, between 2 CSPs. Monitoring this interface delivers added value to service providers in that it enables to trace policy and charging information exchanged between the visited network and the home network.

LOCATION SERVICE

SLg and SLh interfaces

Monitoring GMLC (Gateway Mobile Location Center) server interface: SLg between MME and GMLC and SLh between GMLC and HSS/HLR.

NON 3GPP ACCESS

Monitoring AAA server

AAA server is a key service node to deliver access to 3GPP network from WiFi including VoWiFi with the following interfaces relevant for monitoring:

- **SWa** (untrusted) : mobile authentication & authorization
- **STa** (trusted) : mobile authentication & authorization
- **SWm** (untrusted): tunnel authentication and authorization.
- **SWx** : Mobile authentication & authorization through HSS
- **S6b**: PGW address information to AAA server

3 DETAILED TECHNICAL DESCRIPTION

The OCPIC system is comprised of a data acquisition layer to gather the messaging traversing the network, a data mediation/storage component that correlates in real time each message based on the associated protocol, a storage and key performance indicators processing component to store the various data pieces including any customer defined KPI, and finally the applications.

Once deployed the OCPIC platform can be utilized by many departments to cover different needs and can host a variety of applications. Regardless of the protocols being monitored, most of the applications work the same way.

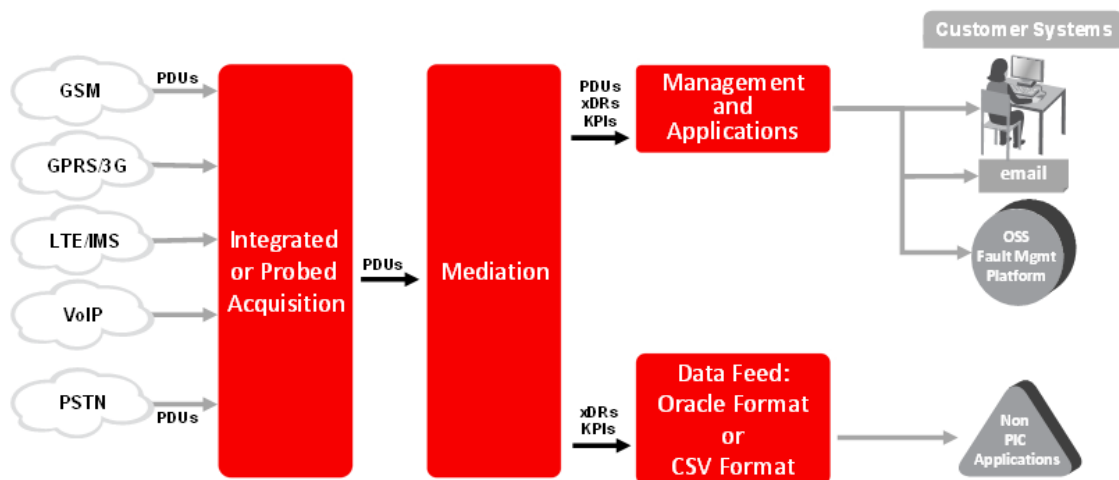


Figure 10 - OCPIC building blocks

3.1 OCPIC MANAGEMENT

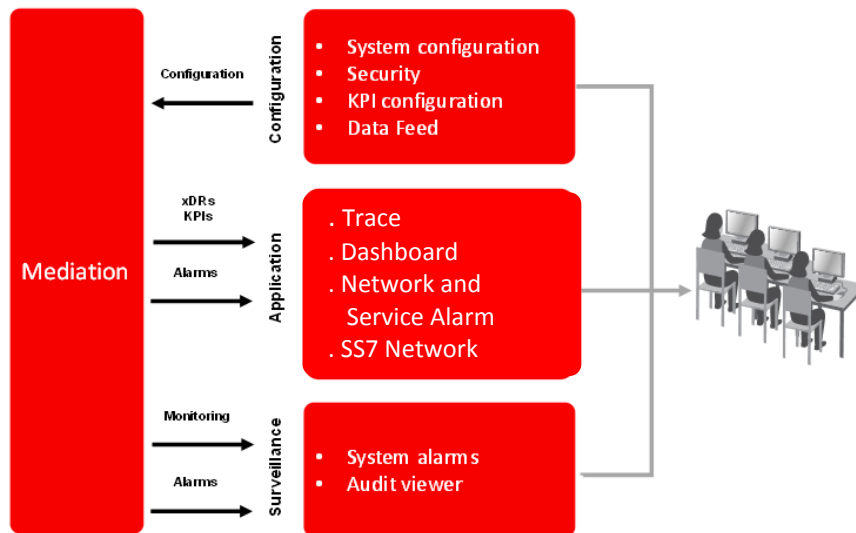


Figure 11 - OCPIC Management applications

3.1.1 OCPIC Management framework

Today's enterprises gain competitive advantage by quickly deploying applications that provide unique business services. Business applications must scale complete 24 x 7, enterprise-wide services, accessible by a number of clients simultaneously.

3.1.1.1 OVERVIEW

OCPIC Management forms the core of a wide range of applications offered by Oracle.

OCPIC Management manages the configuration of a OCPIC system. This allows a centralized configuration and does not need to be entered in multiple locations.

NTP provides system time synchronization between all elements of OCPIC. OCPIC Management supports NTP synchronization from external NTP server.

3.1.1.2 MAJOR BENEFITS

Web-based GUIs (Graphical User Interfaces)

- No installation on client workstation
- Anyone with access privileges can access the applications via URL
- Highly scalable

Reduced cost of maintenance

- Centralized configuration
- Consistency guaranteed across the applications as they all utilize the same source for their data
- Import configuration using csv files

All elements and applications look to OCPIC Management for their configuration, i.e. the data acquisition layer and the mediation layer.

- Reduced time and cost of deployment
- Easily administered (central administration and monitoring)

OCPIC provides a set of system alarms that can be viewed by the user in the system alarm tool that is provided as part of the base OCPIC Management.

OCPIC system self-surveillance is provided via system alarm management application.

Secured and highly configurable access to features and data

- Authentication: verification of users' identities
- Authorization: access control to resources and applications
- Confidentiality: privacy to protect sensitive data

OCPIC Management Server can also be virtualized, using VMware or KVM hypervisor (see section 3.6).

3.1.2 OCPIC Management Base Configuration Features

3.1.2.1 CENTRALIZED CONFIGURATION

The centralized configuration application is used to configure the OCPIC system. From a single location you can configure the complete system in a very efficient way. The configuration application manages a central database containing all configuration information. Configuration information can be separated in two parts:

- data that all applications can utilize like the network topology
- configuration dedicated for frames flows to XDR generation and storage.

The central database avoids unnecessary duplication of the configuration. The data consistency is guaranteed by the use of one single data model in one place

The configuration data is stored in an Oracle database with all standard features associated to standard database: export, backup, etc.

OCPIC EAGLE & OCDSR Integrated Acquisition, OCPIC Probed Acquisition and OCPIC Mediation synch-up from the central database simplifying the data recovery and upgrades.

The central configuration is integrated with the OCPIC Management platform. It has a web based graphical user interface and provides a strong security layer while access to the configuration is simplified.

Using a browsing tree on the left pane in addition to perspectives for different aspects of the configuration task makes it easy to configure the OCPIC system.

The central configuration supports the import of configuration data using csv files.

The configuration consists in defining the PDU or IP frame filtering and routing from the acquisition to the correlation function of the mediation layer up to the storage.

It is also the definition of network views which allow the monitored network to be zoned logically. It can be based on geographical locations, partners, customers, etc. They are used by next-generation applications like the web-based OCPIC Multiprotocol Troubleshooting. They support hierarchy. That is, a network view can contain other network views

The user can create Network Views for:

- Sessions: grouping of multi-protocol XDR sessions
- Links: grouping of links (e.g. SS7 linksets or Gb links)

3.1.2.2 SECURITY

OCPIC Management offers a highly configurable security policy to ensure that data and applications are accessed only by the users that have access privileges. The security application is there to configure the user's profiles. A profile is a convenient way to assign roles to users. Roles are divided in two categories:

- Feature access roles to control access to features (fixed and cannot be changed)
- Privacy roles to control access to data (roles can be added to match any organization)

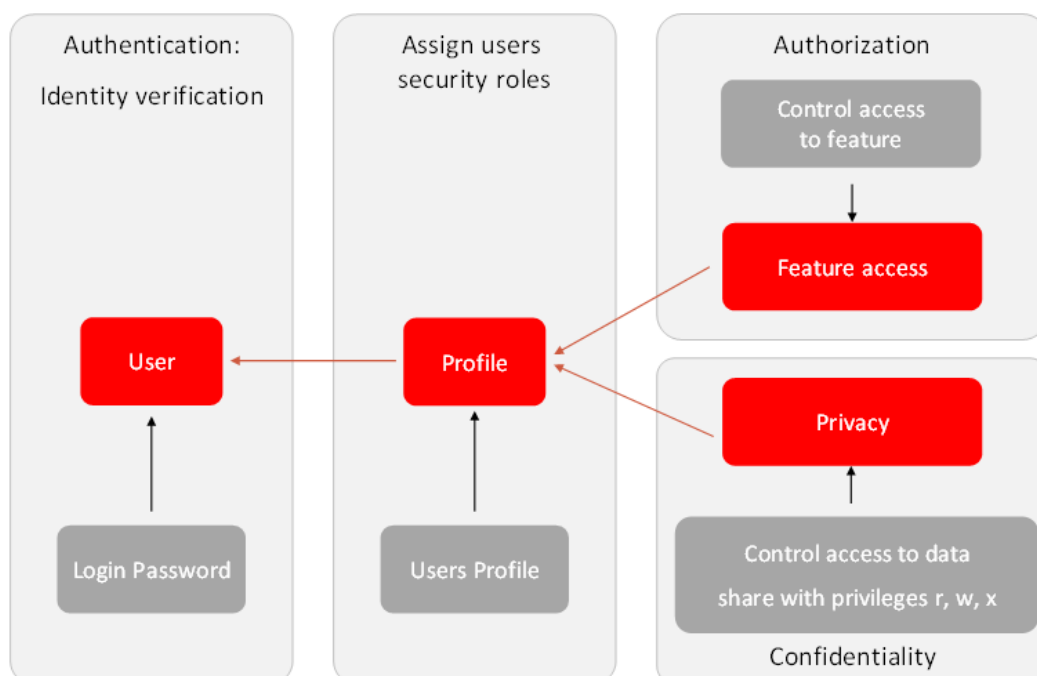


Figure 12 - OCPIC Management applications security configuration

A subset of data can be protected from public access by defining a privacy role for that subset. Then, only users granted with that privacy role will be allowed to see the data. This applies to sessions containing XDRs, dashboards, queries, maps, etc. Those objects can be shared using “rwx” rights. *R* means that the object can be listed. *X* means that the object can be viewed. *W* means that configuration of the object can be changed.

The picture below shows an example of sharing a dashboard to different privacy roles.

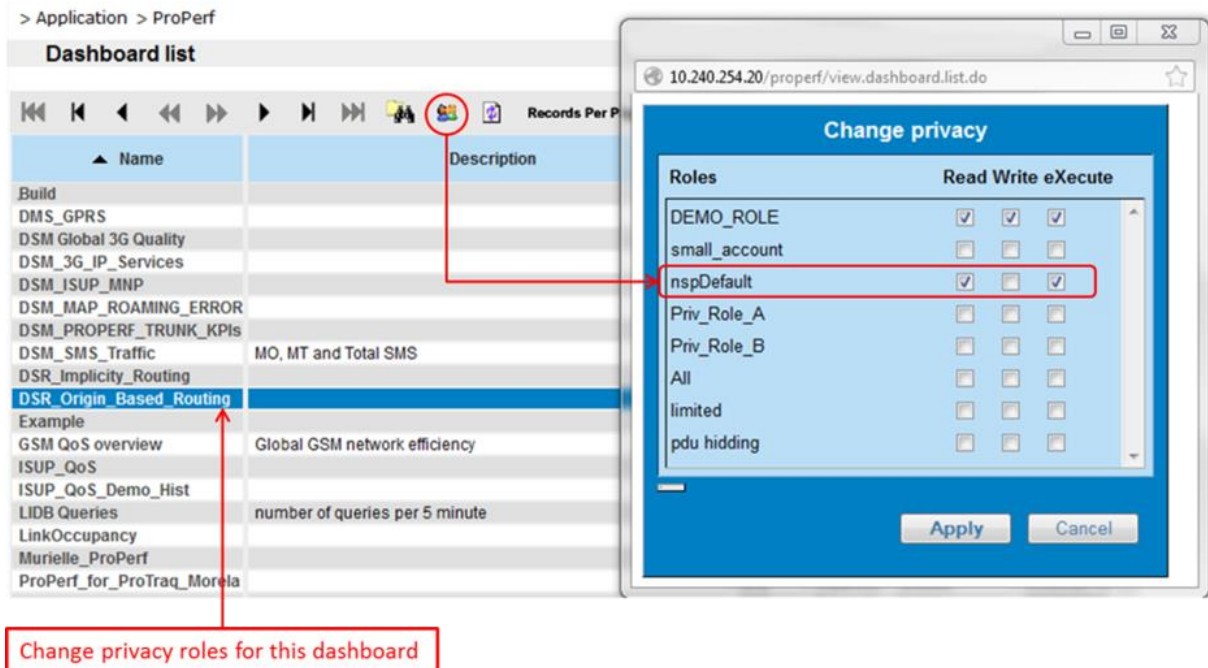


Figure 13 - Data privacy

The security application allows an OCPIC Management administrator to set the security policy for password management. This includes but is not limited to: password length and strength, password aging ...

In addition, this application provides the verification of the number of users simultaneously logged into the system. The number of tokens is positioned based on the quote. If 10 simultaneous users were bought, 10 tokens will be available. The platform will check each time a user logs in or logs out to maintain the pool of tokens. This is the platform that handles this, for the benefit of all the applications.

3.1.2.3 KPI & ALARM CONFIGURATION

Defining real-time alarms on any traffic conditions, setting thresholds and implementing KPIs (Key Performance Indicators) and KQIs (Key Quality Indicators) are critical elements to be taken to monitor networks efficiently.

With OCPIC Management KPI application, you can define specific KPIs/KQIs and alarm to be generated for a given traffic flow. Post-processing treatment will help manage alarm-related information for a given time interval over a specific period for maintenance purposes and troubleshooting.

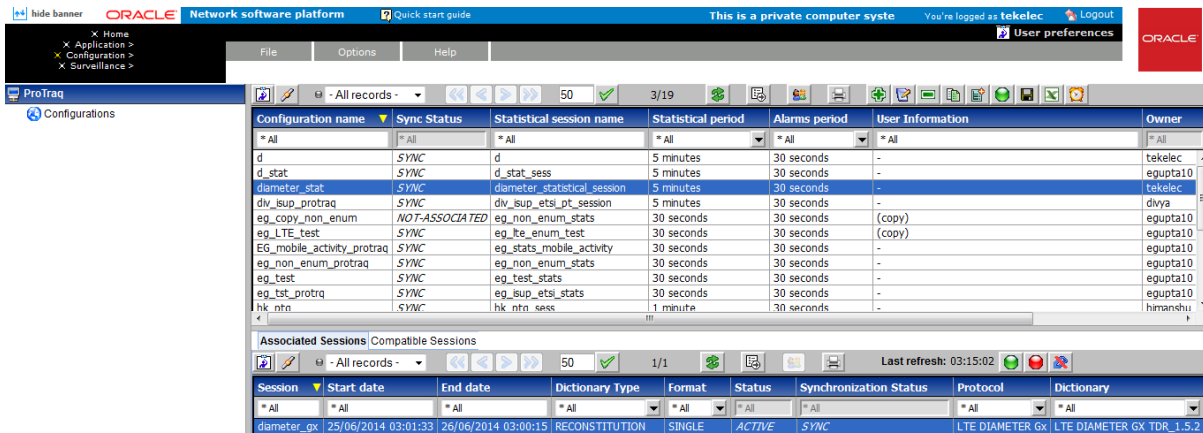


Figure 14 - OCPIC Management KPI application main screen

OCPIC Management KPI application configurations are matrix where you can filter traffic you want to calculate statistics on.

Columns are used to calculate indicators like ASR, NER or anything you need. Rows are typically used to segregate traffic for countries, regions, equipment...

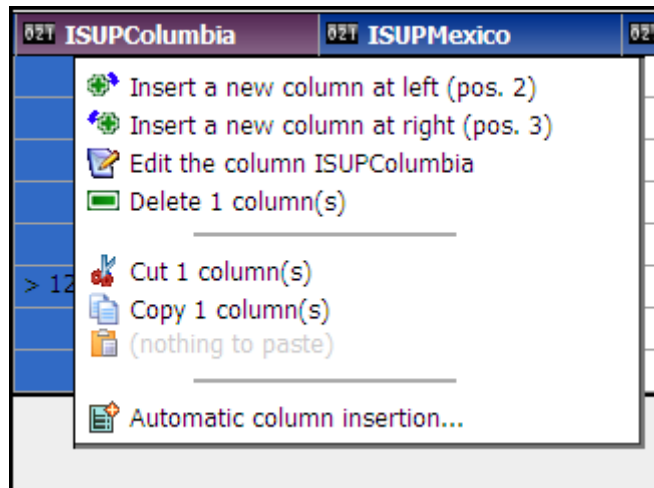


Figure 15 - OCPIC Management KPI application configuration column edition example

An addition, useful feature makes it possible to use a task scheduler based on predefined thresholds in order to enable alarm monitoring for specific periods e.g. night time or day time and adapt the thresholds accordingly. The aggregation period is defined by configuration (30 sec, 1, 5, 15, 30 min, 1 hour, 1 day or 1 week).

Different types of measure types are available.




Figure 16 - OCPIC Management KPI application configuration measure edition example

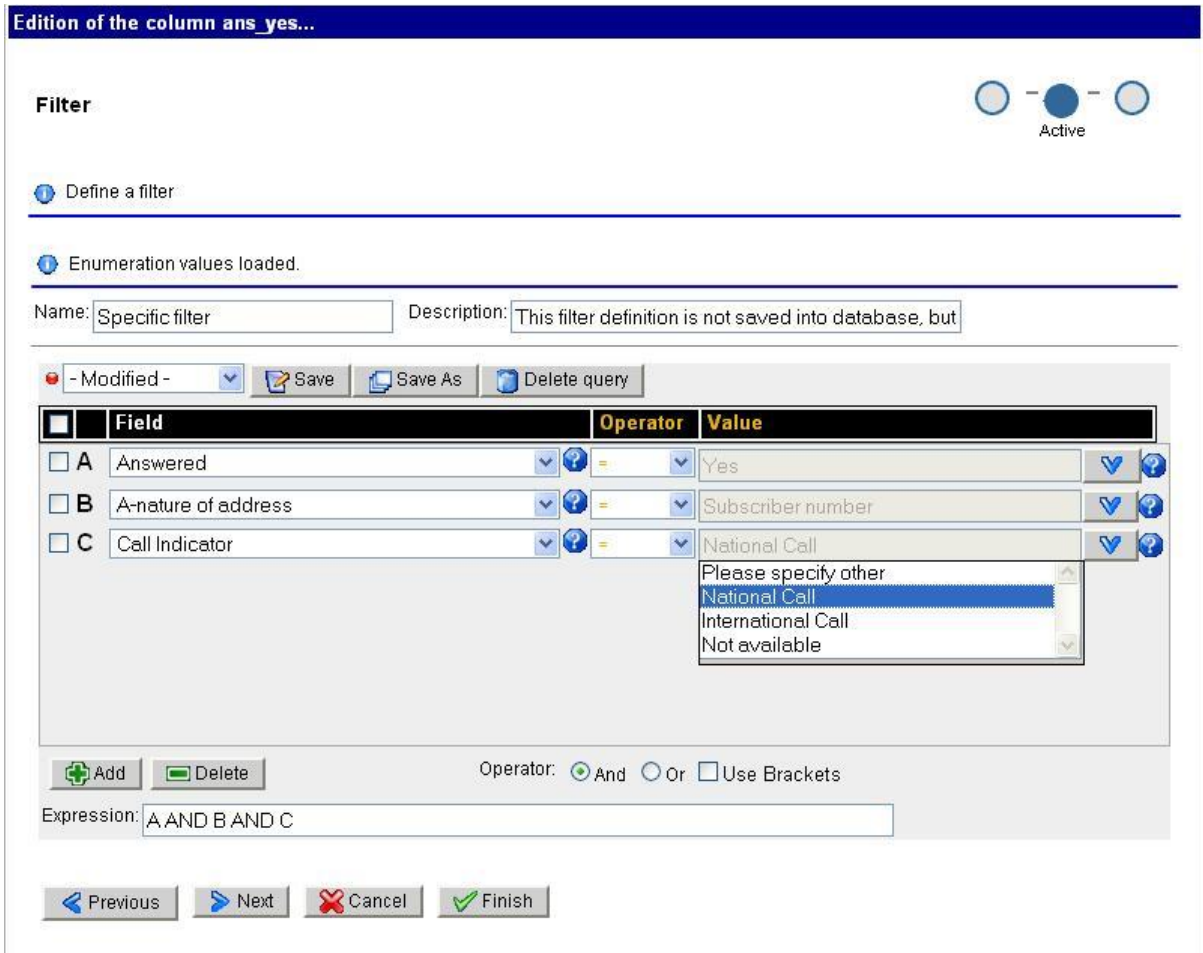


Figure 17 - Example of filtering capabilities




Figure 18 - Possible lines definition

Designing generic models for wide-ranging statistics generation is carried out via dialog boxes and interfaces which combine user-friendly and multi-protocol handling functions. The ability to customize result displays makes it possible to obtain specific purpose network related alarms and thus helps you manage your QoS in a proactive manner.

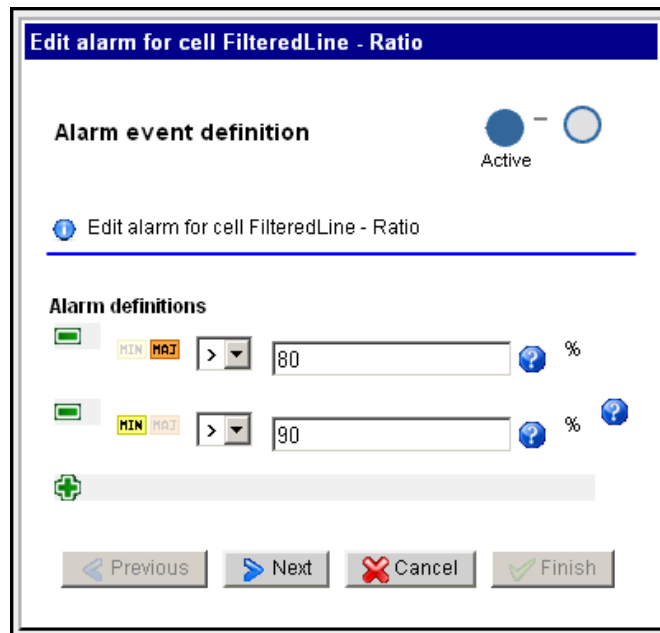


Figure 19 - Example of alarm definition

It is possible to setup alarms when a KPI crosses a threshold. For each KPI, 2 levels of alarms can be defined, minor or major, each with a different threshold. For example, you can configure the system to generate a minor alarm if the ASR for the calls to Germany drops below 90% and a major alarm if it drops below 80%. The alarms are managed by the Network and Service Alarm application described later in this document.

OCPIC Management KPI application enables the CSP to easily customize KPIs in order to get a good knowledge of the behavior of its network. KPIs can be defined on each interface as well as network wide: traffic volume, procedures efficiency, transaction duration and top N analysis.

With the troubleshooting drill-down capabilities, finding the root cause of service failure or network inefficiency is only 2 clicks away. From OCPIC Network and Service Alarm it is possible to drill down from an alarm to a KPI chart to check if the failure is transient or is the result of a long term trend. The other drill down is from an alarm to the browsing of the KPI results for this statistic, and from there, the application can query the XDRs that have been used to generate the KPI. See corresponding section for more details.

3.1.3 OCPIC Management Self-Surveillance Features

3.1.3.1 SYSTEM ALARMS

The OCPIC Management offers a built-in application for the surveillance of the OCPIC system. It provides system alarms related to problems & faults in the acquisition system (hardware) and operation of applications (software) to the user at a glance showing the color coded alarms. Alarms collected are aggregated by objects and by alarm type so that a repeating alarm is just one line in the list

All system alarms from the applications of the OCPIC system are collected by the OCPIC Management in near real time and provided to the user in a constantly refreshed web page.

The application includes alarm management capabilities:

- Users can filter or order the list

- User can acknowledge and manually terminate an alarm
- User can add a comment to an alarm

Alarm Id	Alarm Status	Alarm Raised Time	Ack State	Perceived Severity	Event Count	Probable Cause	Specific Problem	Managed Object
3747	Opened	05/02/2016 06:41:50	UnAcknowledged	Major	1	Equipment malfunction	TKPIC20533: Destination Traffic over specified threshold	IP_Sigtran_eth31_ISUP
3746	Terminated	05/02/2016 06:30:52	Acknowledged	Critical	2	Queue size exceeded	TKPIC25003: IXP: Event List Size Exceeded	lbp1100-1a
3745	Terminated	05/02/2016 06:30:52	Acknowledged	Minor	4	Threshold crossed	TKPIC25002: IXP: Event List Size Threshold Crossed	lbp1100-1a
3744	Terminated	05/02/2016 06:30:52	Acknowledged	Minor	2	Threshold crossed	TKPIC25002: IXP: Event List Size Threshold Crossed	lbp1100-1a
3743	Terminated	05/02/2016 06:26:55	Acknowledged	Major	2	Equipment malfunction	TKPIC20533: Destination Traffic over specified threshold	MAP_10_pmf1100-0a_bj
3742	Terminated	05/02/2016 06:25:00	Acknowledged	Warning	5	CPU cycles limit exceeded	TKPIC25065: IXP: Thread CPU overload	lbp1100-1a
3741	Terminated	05/02/2016 06:15:00	Acknowledged	Warning	2	CPU cycles limit exceeded	TKPIC25065: IXP: Thread CPU overload	lbp1100-1a
3740	Terminated	05/02/2016 06:00:00	Acknowledged	Warning	3	CPU cycles limit exceeded	TKPIC25065: IXP: Thread CPU overload	lbp1100-1a
3739	Opened	05/02/2016 05:59:52	UnAcknowledged	Major	1	Equipment malfunction	TKPIC20533: Destination Traffic over specified threshold	ISUP_2_pmf1100-0a_bj
3738	Terminated	05/02/2016 05:59:10	Acknowledged	Major	2	Equipment malfunction	TKPIC20523: Message Feeder PDU Loss	pmf1100-0a

Figure 20 - System alarm main screen

3.1.3.2 AUDIT VIEWER

The audit viewer is an application that allows users with a specific profile to check the activities on the system. Some of the information available includes a list of who has been changing a KPI configuration, who ran queries with a specific phone number, who logged in and out etc.

Time stamp	User id	Severity	Application id	Message	Machine Name
05/02/2016 07:18:45	tekelec	INFO	Audit Viewer	Activate application auditviewer	nsp-7788-VM
05/02/2016 07:18:14	mcs	INFO	Dashboard	[Oracle] Session query: SELECT *+ -19354 *S.TimeTag, S.Instance, S.Mbps, -19353 Sigtran_Traffi.....	nsp-7788-VM
05/02/2016 07:18:14	mcs	INFO	Dashboard	[Oracle] Session query: SELECT *+ -19354 *S.TimeTag, S.Instance, S.Mbps, -19353 Sigtran_Traffi.....	nsp-7788-VM
05/02/2016 07:18:13	mcs	INFO	Dashboard	[Oracle] Session query: SELECT *+ -19354 *S.TimeTag, S.Instance, S.Mbps, -19353 Sigtran_Traffi.....	nsp-7788-VM
05/02/2016 07:18:12	mcs	INFO	Dashboard	[Oracle] Session query: SELECT *+ -19354 *S.TimeTag, S.Instance, S.Mbps, -19353 Sigtran_Traffi.....	nsp-7788-VM
05/02/2016 07:18:12	mcs	INFO	Dashboard	[Oracle] Session query: SELECT *+ -19354 *S.TimeTag, S.Instance, S.Mbps, -19353 Sigtran_Traffi.....	nsp-7788-VM
05/02/2016 07:18:11	mcs	INFO	Dashboard	[Oracle] Session query: SELECT *+ -19354 *S.TimeTag, S.Instance, S.Mbps, -19353 Sigtran_Traffi.....	nsp-7788-VM
05/02/2016 07:18:11	mcs	INFO	Dashboard	[Oracle] Session query: SELECT *+ -19354 *S.TimeTag, S.Instance, S.Mbps, -19353 Sigtran_Traffi.....	nsp-7788-VM
05/02/2016 07:18:10	mcs	INFO	Dashboard	[Oracle] Session query: SELECT *+ -19354 *S.TimeTag, S.Instance, S.Mbps, -19353 Sigtran_Traffi.....	nsp-7788-VM
05/02/2016 07:18:09	mcs	INFO	Dashboard	[Oracle] Session query: SELECT *+ -19354 *S.TimeTag, S.Instance, S.Mbps, -19353 Sigtran_Traffi.....	nsp-7788-VM
05/02/2016 07:18:08	mcs	INFO	Dashboard	[Oracle] Session query: SELECT *+ -19354 *S.TimeTag, S.Instance, S.Mbps, -19353 Sigtran_Traffi.....	nsp-7788-VM
05/02/2016 07:18:06	mcs	INFO	Dashboard	[Oracle] Session query: SELECT *+ -19354 *S.TimeTag, S.Instance, S.Mbps, -19353 Sigtran_Traffi.....	nsp-7788-VM
05/02/2016 07:18:05	mcs	INFO	Dashboard	[Oracle] Session query: SELECT *+ -19354 *S.TimeTag, S.Instance, S.Mbps, -19353 Sigtran_Traffi.....	nsp-7788-VM
05/02/2016 07:18:04	mcs	INFO	Dashboard	[Oracle] Session query: SELECT *+ -19354 *S.TimeTag, S.Instance, S.Mbps, -19353 Sigtran_Traffi.....	nsp-7788-VM
05/02/2016 07:18:04	mcs	INFO	Dashboard	[Oracle] Session query: SELECT *+ -19354 *S.TimeTag, S.Instance, S.Mbps, -19353 Sigtran_Traffi.....	nsp-7788-VM
05/02/2016 07:18:03	mcs	INFO	Dashboard	[Oracle] Session query: SELECT *+ -19354 *S.TimeTag, S.Instance, S.Mbps, -19353 Sigtran_Traffi.....	nsp-7788-VM
05/02/2016 07:18:02	mcs	INFO	Dashboard	[Oracle] Session query: SELECT *+ -19354 *S.TimeTag, S.Instance, S.Mbps, -19353 Sigtran_Traffi.....	nsp-7788-VM
05/02/2016 07:18:02	mcs	INFO	Dashboard	[Oracle] Session query: SELECT *+ -19354 *S.TimeTag, S.Instance, S.Mbps, -19353 Sigtran_Traffi.....	nsp-7788-VM
05/02/2016 07:18:01	mcs	INFO	Dashboard	[Oracle] Session query: SELECT *+ -19354 *S.TimeTag, S.Instance, S.Mbps, -19353 Sigtran_Traffi.....	nsp-7788-VM
05/02/2016 07:18:01	mcs	INFO	Dashboard	[Oracle] Session query: SELECT *+ -19354 *S.TimeTag, S.Instance, S.Mbps, -19353 Sigtran_Traffi.....	nsp-7788-VM
05/02/2016 07:18:00	mcs	INFO	Dashboard	[Oracle] Session query: SELECT *+ -19354 *S.TimeTag, S.Instance, S.Mbps, -19353 Sigtran_Traffi.....	nsp-7788-VM

Figure 21 – Audit viewer example

Every application that runs on the OCPI Management is logging user’s actions on audit viewer.

3.1.3.3 CAPACITY MANAGEMENT

Capacity management is a statistical session generated with a dedicated XDR builder. It provides very detailed self-surveillance data which can be better analyzed after selection and aggregation.

Derived statistical data are produced in real time (periodicity at the minute, 15 minutes and hour). These statistical results are stored as regular XDR that can be manage with standard OCPI tools.

They globally provide system activity information and traffic in real time and historical mode. It can be used to check the traffic managed according to the licenses.

Standard KPI configurations are provided and need mandatory installation steps. In addition optional customized KPI configurations could be added for more perspectives.

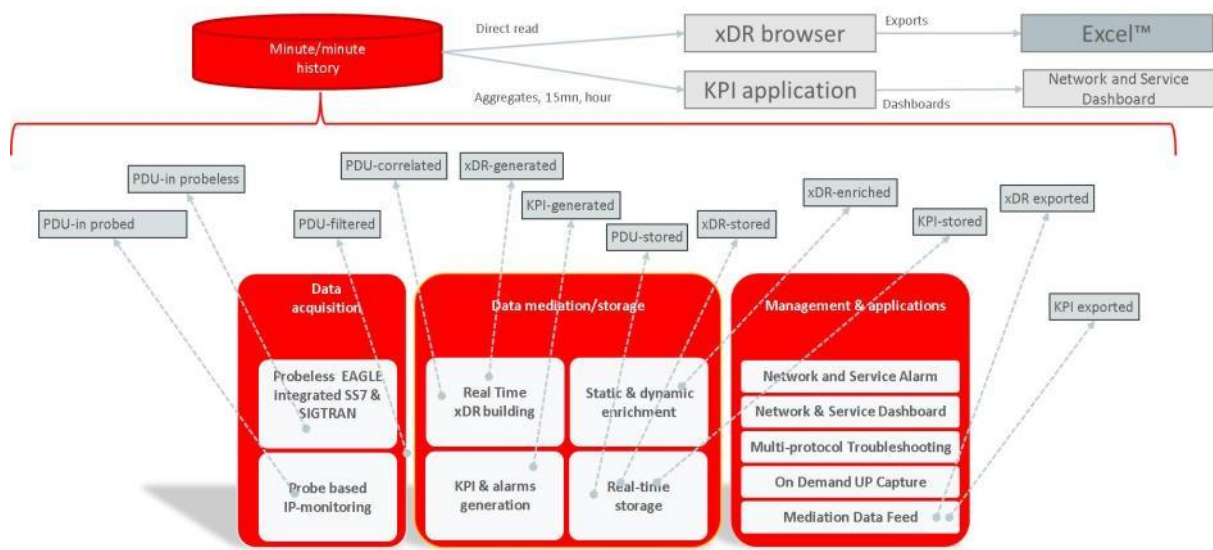


Figure 22 – Capacity management scope

3.1.4 Protect Subscriber’s privacy

OCPIC Management offers subscribers’ privacy protection. There are two cases to consider. One for the SMS hiding, and one for the general case

3.1.4.1 SMS HIDING

In the general case, SMS is not a field of the XDR. The SMS is in the protocol decoding. Depending on user’s role, the SMS is decoded or not. See table below.

There is a dedicated builder for MAP protocol where the SMS can be a field in the XDR, with clear text. The builder is called MAP_SM.

Table 1 – SMS Hiding

	SMS in decoding	SMS in XDR	Other private data
Builder	MAP, MAP_SM	MAP_SM	any
Hide	field hiding	field hiding	field hiding
Anonymous	Builder parameter	Builder parameter	N/A

There is an option of the MAP builder to replace SMS by * straight in the PDU.

Maximum wait after TC-ADDT	0
Activate Multilink(Dual) Mode	<input type="checkbox"/>
Correlate without TC-BEGIN	<input type="checkbox"/>
Waiting for note MM Event end (s)	30
Anonymous SMS Mode	<input type="checkbox"/>
Waiting for ist Alert end (s)	120
Waiting for ist Command end (s)	120

Figure 23 – MAP builder configuration for anonymous SMS

In OCPIC Multiprotocol Troubleshooting, depending on user’s authorization, SMS is visible and/or decoded.

Table 2 – SMS decoding per user’s authorization

	Business User		Business Power User		Business Manager	
	MAP (protocol)	MAP_SM (XDR)	MAP (protocol)	MAP_SM (XDR)	MAP (protocol)	MAP_SM (XDR)
SMS in clear	n/a because don’t see decoding	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

3.1.4.2 FIELD HIDING

Field hiding applies to any protocol and is configurable using the using OCPIC Management central configuration. Hiding applies to XDRs, PDUs and protocol decoding. It is configured for a protocol and applies to the system.

Field hiding applies in OCPIC Multiprotocol Troubleshooting in different sections. Values are replaced by ‘*’.

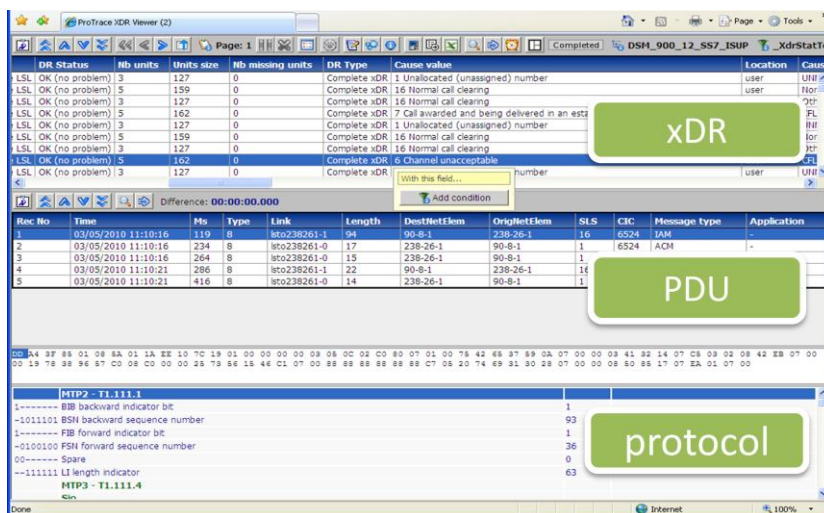


Figure 24 – OCPIC Multiprotocol Troubleshooting main window for XDR, PDU and protocol

For XDR fields, it can be hidden from the right, the left for a number of characters or completely.

For PDUs, this is the same as XDRs. In addition, some values inside a “application” field are hidden based on protocol hiding.

For protocol, hiding is based on keywords (2nd column in protocol part in picture above) and all other fields are hidden.

Table 3 – Field hiding per user’s authorization

	Business User		Business Power User		Business Manager	
	Display	Hide	Display	Hide	Display	Hide
XDR	☑	☑	☑	☑	☑	☒
PDU	☒	N/A	☑	☑	☑	☒
protocol	☒	N/A	☑	☑	☑	☒

3.2 OCPIC MANAGEMENT OPTIONAL APPLICATIONS

3.2.1 OCPIC Multiprotocol Troubleshooting – XDR and KPI Browsing

Note: this feature is not optional but linked to the tracing feature described in the following chapter.

Tracking call and transaction failures in near-real time requires rapid access to various levels of information such as XDR (CDR, TDR, IPDR ...), message and protocol decoding. This is why we developed OCPIC XDR viewer to extract all data pertaining to a given call / transaction in order to perform call / transaction traces over a network at predefined times if needed. OCPIC XDR viewer enables a top-down visualization of transactions/calls from XDR level to protocols analysis.

Additional features enable users to apply specific-purpose filters so that the CSP's traffic can be further analyzed. Post-processing treatment of call-related files will help generate accurate reports for troubleshooting purposes.

You can focus your search, for a given time interval on the available XDR database. Refined conditions can be applied by means of a set of filters, most of which do not require the need to refer to a protocol specification. With its user-friendly display functions, you can select parameters (transaction, protocol, ..) and configure your own report layouts (column widths, lists sorted out in ascending or descending order, hide unnecessary fields, etc.)

The query parameters combined with security features allow individuals with limited telecom skills to use XDR. It is now possible for a user to simply use queries that have been predefined for him/her by entering the required information parameter when running the query, like a phone number, an IMSI... to get all of the corresponding XDRs.

The queries can be performed with extended capabilities:

- Through filters applied to any XDR field
- Allows complex combination of several fields across multiple protocols
- Parameterized queries let the user enter a value for a field
- Allows queries to search on historic data as well as near real time

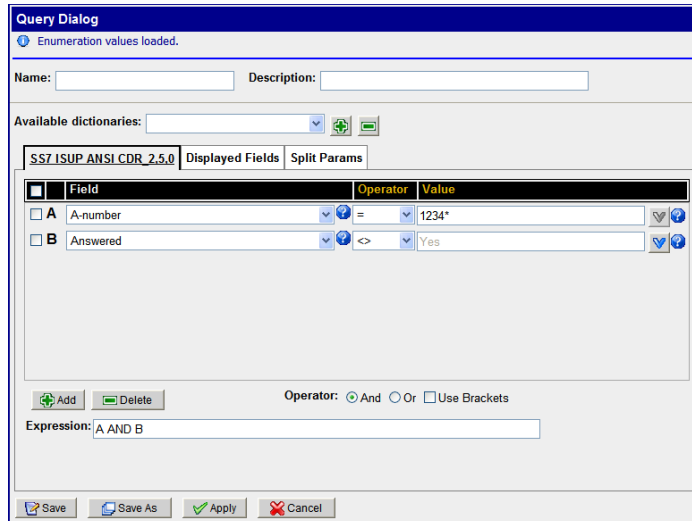


Figure 25 - Extended filtering capability

The OCPIC XDR viewer gives access to network view and link view: to query several sessions across multi protocols on several XDR storages. Three levels of display are available: the XDRs, message sequence of the call attempt / transaction, and protocol decode to display the messages in full. I.e. there is a possibility to get full decoding of each MSU/PDU. A full decoding is available with a simple click on a message.

On top of XDR viewing, the OCPIC XDR viewer allows statistics visualization (Q752 sessions, call/transaction efficiency, traffic, etc.). These statistics can be exported into a csv file and opened with Microsoft Excel in order to generate curves and tables for further analysis. Other supported formats include HTML, XML and text files.

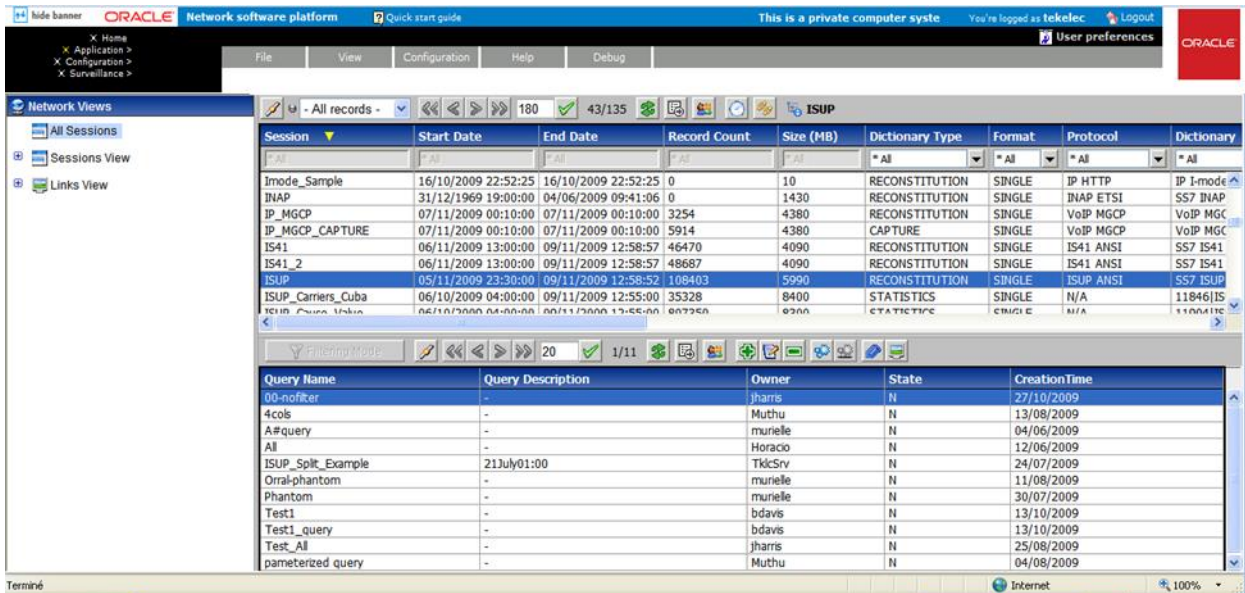


Figure 26 - OCPIC XDR viewer overview

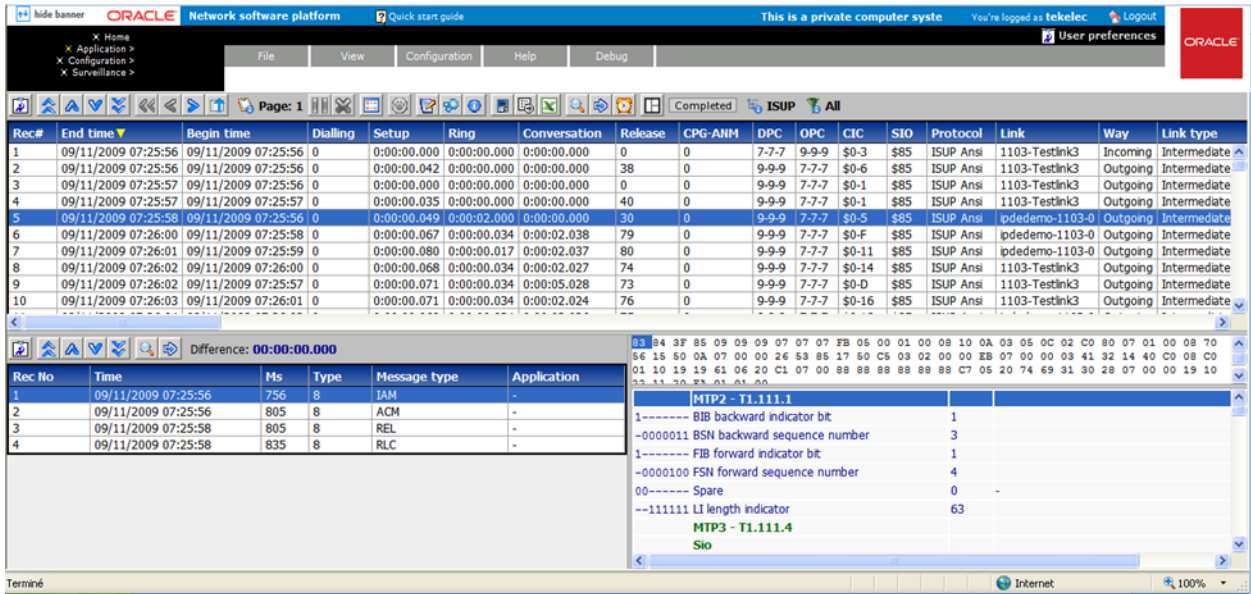


Figure 27 - Example OCPIC XDR viewer output

3.2.2 OCPIC Multiprotocol Troubleshooting – Call Tracing

For troubleshooting, the ability to perform call/transaction/session multi-protocol end-to-end tracing is mandatory for the following scenarios:

- Network-related tracing, where for a global network, problem the user must be able to search on a specific failure cause, to extract a list of calls/transactions/sessions impacted by this problem, and then be able to trace on a chosen number.
- Customer-related tracing, where by the customer, the user can enter for example the IMSI, without any previous query filter, and immediately get the details of calls/sessions related to this customer

Any protocols supervised by OCPIC, related to a call/transaction/session, can be traced as part of an end to end network wide call trace.

OCPIC Multiprotocol Troubleshooting is a scenario-less application. It is based on embedded intra-protocol rules and inter-protocol tracing that is part of an Oracle patent. What this means to the customer is that the users of the system do not need to have the protocol knowledge of how to map Protocol A to Protocol B when attempting to perform a network-wide call trace. The logic to perform this trace is built into the OCPIC Multiprotocol Troubleshooting application itself. OCPIC Multiprotocol Troubleshooting supports Intra-protocol traces functionality for all protocols supported by OCPIC. For example, a customer-related trace of a mobile can be done just by selecting a network view, entering an IMSI, and clicking on “trace now”. Another feature of Network diagram is to display time delay linked to each network elements through which signaling passes.

OCPIC Multiprotocol Troubleshooting handles & displays transactions/calls/sessions in an in-progress mode, including a Message Sequence Diagram. This requires partial CDR option for SIP and ISUP CDRs.

OCPIC Multiprotocol Troubleshooting has the capability to filter on display (ex: in GPRS, where several protocols can be on the same interface, the application can hide some protocols on display only.)

Other functions of OCPIC Multiprotocol Troubleshooting include:

- Handling of some level 2 / level 3 messages in order to handle events like changeovers, alignment, SCTP path failures, as well as network management messages like TFA, TFP, etc.
- Handling of SIGTRAN transport protocol layers messages.
- Two modes (“real time” and “historical”) are supported by OCPIC Multiprotocol Troubleshooting

A trace can be performed either:

- On a sub-network when a global network-related problem is analyzed, but with knowledge of the concerned area
- On an entire network for some customer-related tracing. Example: for tracing in real-time a roamer (identified by an IMSI) who is supposed to enter the network, the point of entry being unknown

In addition to above-mentioned filters defined by administrator or user with specific rights, other users can define additional filters for their own needs.

To configure a trace, the user selects a network view which relates to the concerned data sessions, protocols, and/or related dictionaries.

Before starting a Network-related trace, the User starts a query filter based on any field from the concerned protocol dictionary. Then, in the list of XDRs matching the filter, the user selects an XDR to start a trace with a “start now” or a “begin time” (can be historical), and ends with an “end time” or “continue until cancelled”.

A real-time customer-related trace starts with a filter based on customer identifier like MSISDN or IMSI, or terminal identification like IMEI. The trace starts with a “start now” or a “begin time”, and ends with an “end time” or “continue until cancelled”.

Any protocol supervised by OCPIC can be traced at the same time. So it will be easy to find every operation concerning a subscriber's activities on wire line and wireless networks. Exchange of signaling units and user packets through different elements using different protocols can be highlighted for further investigation purposes. As probes can be located in different areas of the network, end-to-end call tracing will be performed in order to provide a centralized view of the network.

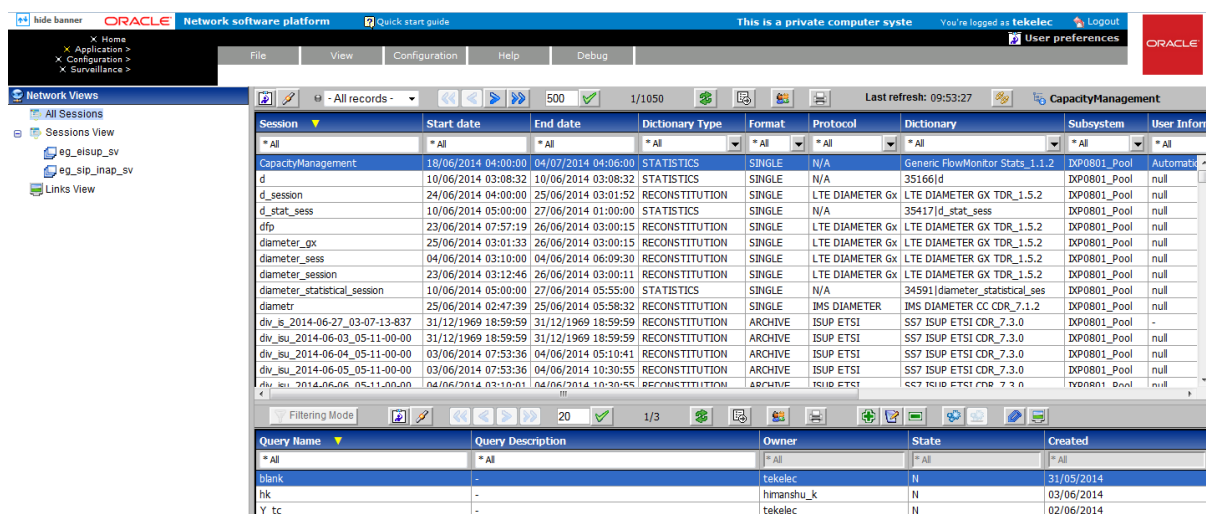


Figure 28 - OCPIC Multiprotocol Troubleshooting screen capture

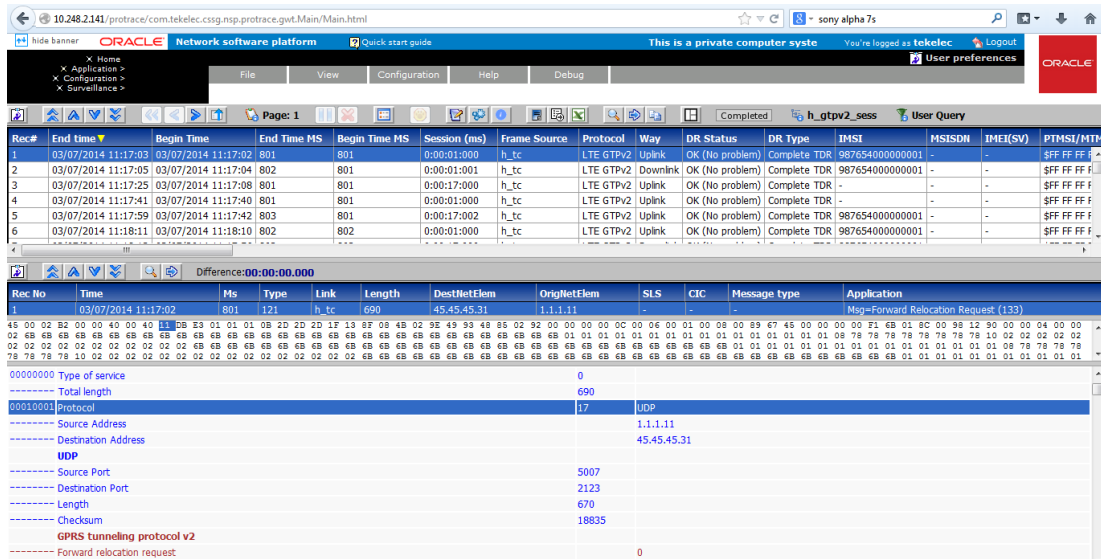


Figure 29 - Example of OCPC Multiprotocol Troubleshooting output

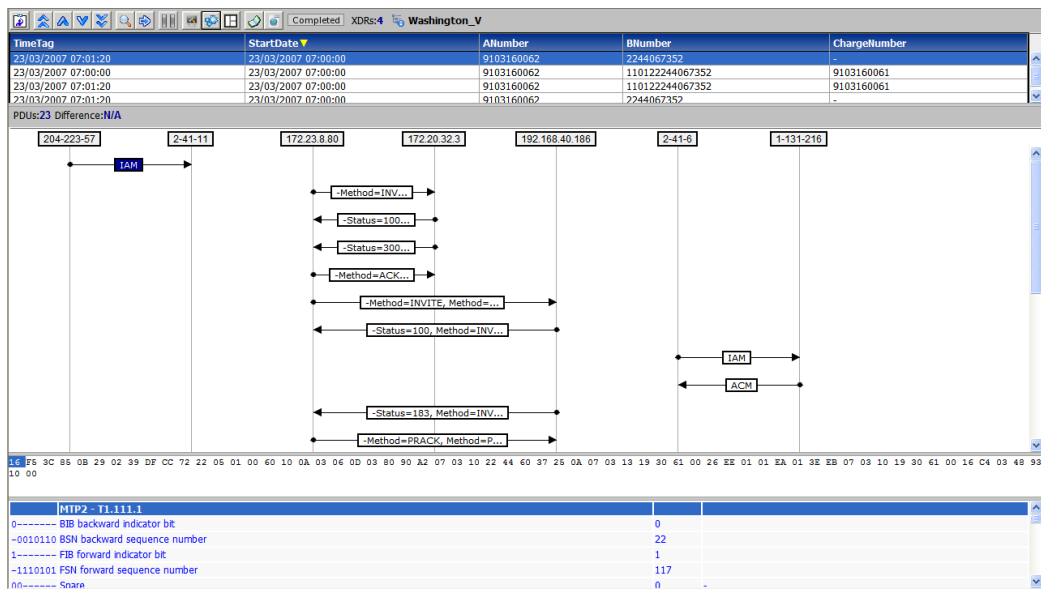


Figure 30 - Ladder diagram

Trace export:

It is possible to export a trace in the following formats:

- Native ZIP
- CSV
- TXT
- HTML
- XML
- PCAP (SIGTRAN and Diameter)

3.2.3 OCPIC Dashboard

With OCPIC Dashboard, users can create a large variety of live and offline dashboards (indicator displays), line, pie or bar charts and table panels. Automatic refresh functionality is available in the case of live traffic.

Every indicator defined by the OCPIC Management KPI application can be displayed by OCPIC Dashboard. These include for instance ISUP or SIP service quality monitoring in real-time. Users can check INAP, MAP, Diameter transaction volumes, efficiency or duration. Checking load sharing is also something that OCPIC Dashboard can do. For instance that can be useful in the context of diameter traffic among several HSS. And the list of examples can also comprise intertechnology use case like CS Fallback.

Failures and overloads appear instantly. Trends can be easily estimated according to the shape of the curves. Offset representations make it easy to compare between real-time and offline data.

The User Authentication feature provides access rights to specific functions and/or specific data. Depending on their profile, users are able to create or utilize dashboards in order to access vital network information.

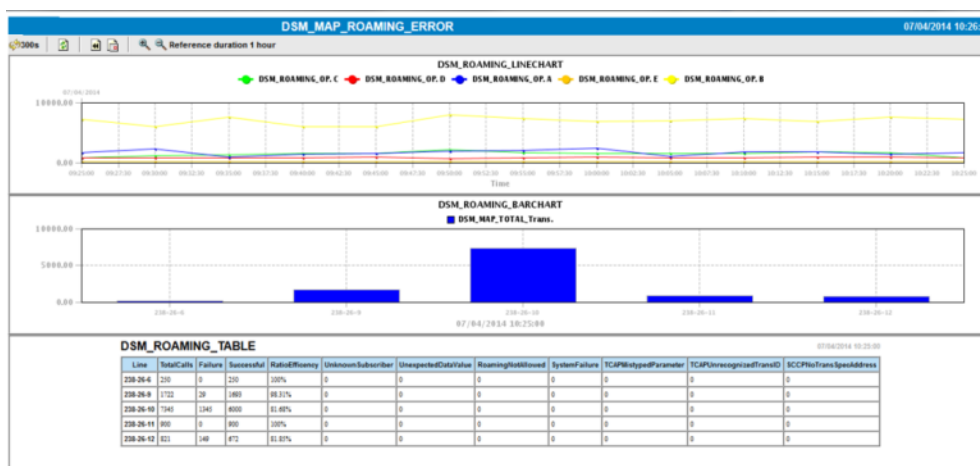


Figure 31 - Example of OCPIC Dashboard output

3.2.4 OCPIC Network and Service Alarm

OCPIC Network and Service Alarm manages predefined or KPI related alarms. Key network elements such as signaling links, linksets, nodes and dedicated services are supervised by means of a feature-rich platform with alarm handling capabilities based on standard components.

Defined KPIs can be tagged in order to enable quick filtering in order to focus on specific problems. In addition to the tag, any alarm attribute can be used as a filtering criteria.

By tags can be composed of several keys in order to enable powerful grouping. As example let's consider 2 tags:

- RoamingISUP
- RoamingMAP

By using wild cards in the filtering it is possible to all roaming alarms, or only ISUP or MAP.

It is possible to get an alarm summary per the different tags.

It is possible for people in charge of managing alarms to acknowledge or manually terminate an alarm. Their login as well as date and time will be stored for future reference.

The User Authentication feature provides access rights to specific functions and/or specific data. Depending on their profile, users will be able to create or utilize filters in order to access vital network information.

In the viewer section, they will only see objects they have authorization for, and thus only see their corresponding alarms and not the complete set. This allows a better focus on managing the part of the network or service or SLA they are responsible for.

Alarm Id	Group Tag	Alarm Status	Alarm Raised Time	Ack State	Perceived Severity	Event Count	Probable Cause	Specific Problem	Managed Object
3747	-	Opened	05/02/2016 06:41:50	UnAcknowledged	Major	1	Equipment malfunction	TKPIC20533: Destination Traffic over specified threshold	IP_Sigtran_eth31_ISUP_...
3746	-	Terminated	05/02/2016 06:30:52	Acknowledged	Critical	2	Queue size exceeded	TKPIC25003: NP: Event List Size Exceeded	lsp1100-1a
3745	-	Terminated	05/02/2016 06:30:52	Acknowledged	Minor	4	Threshold crossed	TKPIC25002: NP: Event List Size Threshold Crossed	lsp1100-1a
3744	-	Terminated	05/02/2016 06:30:52	Acknowledged	Minor	2	Threshold crossed	TKPIC25002: NP: Event List Size Threshold Crossed	lsp1100-1a
3743	-	Terminated	05/02/2016 06:26:55	Acknowledged	Major	2	Equipment malfunction	TKPIC20533: Destination Traffic over specified threshold	MAP_10_pmf1100-0a_lsp
3742	-	Terminated	05/02/2016 06:25:00	Acknowledged	Warning	5	CPU cycles limit exceeded	TKPIC25065: NP: Thread CPU overload	lsp1100-1a
3741	-	Terminated	05/02/2016 06:15:00	Acknowledged	Warning	2	CPU cycles limit exceeded	TKPIC25065: NP: Thread CPU overload	lsp1100-1a
3740	-	Terminated	05/02/2016 06:00:00	Acknowledged	Warning	3	CPU cycles limit exceeded	TKPIC25065: NP: Thread CPU overload	lsp1100-1a
3739	-	Opened	05/02/2016 05:59:52	UnAcknowledged	Major	1	Equipment malfunction	TKPIC20533: Destination Traffic over specified threshold	ISUP_2_pmf1100-0a_lsp
3738	-	Terminated	05/02/2016 05:59:10	Acknowledged	Major	2	Equipment malfunction	TKPIC20523: Message Feeder PDU Loss	pmf1100-0a

Figure 32 - Example of OCPIC Network and Service Alarm output

3.2.5 Inter-Application Link on KPI alarms

OCPIC includes inter-applications links in order to improve root causes analysis process. Several drill down capabilities are available.

From any alarm on a OCPIC Network and Service Alarm, the user can drill down details of the evolution of KPI generating this alarm. The graphical display helps to distinguish e.g. problems due to a sport event from those that are due a longer trend. Drill to KPI details provides additional measures complementing the information provide by the indicator triggering the alarm.

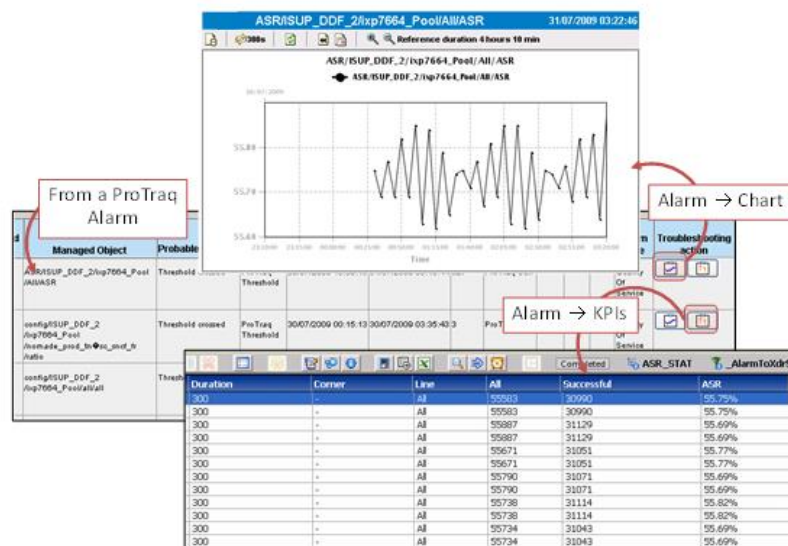


Figure 33 - Drill-down from OCPIC Network and Service Alarm KPI Alarm to OCPIC Dashboard or to OCPIC XDR browser

Rec#	Period end	Duration	Sample	Corner	Line	Attempts	ASR percent	NER percent	PDD milliseconds	ALOC
1	23/11/2009 04:25:00	300	1	OK xDR	TOTAL	486	79.62%	86.41%	63	2
2	23/11/2009 04:30:00	300	1	OK xDR	TOTAL	1206	91.54%	94.36%	65	4
3	23/11/2009 04:35:00	300	1	OK xDR	TOTAL	1002	90.11%	93.41%	65	4
4	23/11/2009 04:40:00	300	1	OK xDR	TOTAL	1001			65	4
5	23/11/2009 04:45:00	300	1	OK xDR	TOTAL	883			65	3
6	23/11/2009 04:50:00	300	1	OK xDR	TOTAL	401			62	2
7	23/11/2009 04:55:00	300	1	OK xDR	TOTAL	486			63	2
8	23/11/2009 05:00:00	300	1	OK xDR	TOTAL	1206			65	4
9	23/11/2009 05:05:00	300	1	OK xDR	TOTAL	1002	90.11%	93.41%	64	4
10	23/11/2009 05:10:00	300	1	OK xDR	TOTAL	1001	90.1%	93.4%	64	4
11	23/11/2009 05:15:00	300	1	OK xDR	TOTAL	883	88.44%	92.29%	65	3
12	23/11/2009 05:20:00	300	1	OK xDR	TOTAL	401	75.31%	83.54%	62	2
13	23/11/2009 05:25:00	300	1	OK xDR	TOTAL	486	79.62%	86.41%	63	2
14	23/11/2009 05:30:00	300	1	OK xDR	TOTAL	1206	91.54%	94.36%	65	4
15	23/11/2009 05:35:00	300	1	OK xDR	TOTAL	1002	90.11%	93.41%	64	4
16	23/11/2009 05:40:00	300	1	OK xDR	TOTAL	1001	90.1%	93.4%	65	4
17	23/11/2009 05:45:00	300	1	OK xDR	TOTAL	883	88.44%	92.29%	65	3
18	23/11/2009 05:50:00	300	1	OK xDR	TOTAL	401	75.31%	83.54%	62	2
19	23/11/2009 05:55:00	300	1	OK xDR	TOTAL	485	79.58%	86.39%	63	2
20	23/11/2009 06:00:00	300	1	OK xDR	TOTAL	1206	91.54%	94.36%	65	4
21	23/11/2009 06:05:00	300	1	OK xDR	TOTAL	1002	90.12%	93.41%	64	4

Figure 34 - Table display of KPI from OCPIK Network and Service Alarm drill down

Further drill down allows an XDR and protocols decoding level analysis.

Rec#	End time	Begin time	Dialing	Setup	Ring	Conversation	Release	CPG-ANM	DPC	OPC	CIC	STO	Protocol
1	23/11/2009 04:35:01	23/11/2009 04:34:55	0	0:00:00.076	0:00:00.019	0:00:05.016	84	0	9-9-9	7-7-7	\$1BD-16	\$85	ISUP Ans
2	23/11/2009 04:35:01	23/11/2009 04:34:56	0	0:00:00.065	0:00:00.030	0:00:05.015	75	0	9-9-9	7-7-7	\$1BD-19	\$85	ISUP Ans
3	23/11/2009 04:35:01	23/11/2009 04:34:59	0	0:00:00.065	0:00:00.030	0:00:02.020	75	0	9-9-9	7-7-7	\$1BE-16	\$85	ISUP Ans
4	23/11/2009 04:35:02	23/11/2009 04:34:56	0	0:00:00.064	0:00:00.031	0:00:05.024	75	0	9-9-9	7-7-7	\$1BD-1F	\$85	ISUP Ans
5	23/11/2009 04:35:02	23/11/2009 04:34:57	0	0:00:00.065	0:00:00.030	0:00:05.015	75	0	9-9-9	7-7-7	\$1BE-2	\$85	ISUP Ans
6	23/11/2009 04:35:02	23/11/2009 04:35:00	0	0:00:00.065	0:00:00.030	0:00:02.015	75	0	9-9-9	7-7-7	\$1BE-1F	\$85	ISUP Ans
7	23/11/2009 04:35:03	23/11/2009 04:34:57	0	0:00:00.065	0:00:00.030	0:00:05.015	80	0	9-9-9	7-7-7	\$1BE-8	\$85	ISUP Ans
8	23/11/2009 04:35:03	23/11/2009 04:34:58	0	0:00:00.065	0:00:00.030	0:00:05.015	75	0	9-9-9	7-7-7	\$1BE-8	\$85	ISUP Ans
9	23/11/2009 04:35:03	23/11/2009 04:35:01	0	0:00:00.065	0:00:00.030	0:00:02.015	75	0	9-9-9	7-7-7	\$1BF-8	\$85	ISUP Ans
10	23/11/2009 04:35:04	23/11/2009 04:34:58	0	0:00:00.065	0:00:00.030	0:00:05.026	74	0	9-9-9	7-7-7	\$1BE-11	\$85	ISUP Ans
11	23/11/2009 04:35:04	23/11/2009 04:34:59	0	0:00:00.065	0:00:00.030	0:00:05.015	75	0	9-9-9	7-7-7	\$1BE-15	\$85	ISUP Ans
12	23/11/2009 04:35:04	23/11/2009 04:35:04	0	0:00:00.040	0:00:00.000	0:00:00.000	10	0	9-9-9	7-7-7	\$1C0-A	\$85	ISUP Ans

Rec No	Time	Ms	Type	Message type	Application
1	23/11/2009 04:34:55	856	8	IAM	-
2	23/11/2009 04:34:55	932	8	ACM	-
3	23/11/2009 04:34:55	951	8	ANM	-
4	23/11/2009 04:35:00	967	8	REL	-
5	23/11/2009 04:35:01	51	8	RLC	-


```

A3 F8 3F 85 09 09 09 07 07 2B B6 37 01 00 00 00 03 05 0C 02 C0
80 07 01 00 24 53 85 17 49 0A 07 00 00 06 41 32 14 49 C5 03 02 91 4D
EB 07 00 00 25 73 56 15 49 C0 08 C0 00 00 18 78 38 96 49 C1 07 00 25
78 56 15 49 C7 05 20 7A 58 31 30 28 07 00 00 17 10 23 11 48 23 01

MTP2 - T1.111.1
1----- BIB backward indicator bit                1
-0100011 BSN backward sequence number             35
1----- FIB forward indicator bit                1
-1111000 FSN forward sequence number              120
00----- Spare                                    0
--111111 LI length indicator                      63

MTP3 - T1.111.4
Sio
10----- NI network indicator                    2      National network
00----- Message priority code                   0      Spare
  
```

Figure 35 - XDR analysis and protocol decoding from OCPIK Network and Service Alarm drill down

3.2.6 Alarm forwarding

To provide CSPs with real time monitoring of the networks, it is important that all alarms are sent to one single application. The alarm forwarding allows a seamless integration into OSS / fault management platform.

Alarm forwarding allows the generation of e-mails too. Up to 10 rules can be defined to forward emails. With each rule an email distribution list can be defined. For instance alarms on servers can be sent to a department and alarms on SLA can be sent to a different department

<input type="checkbox"/>	#	Rule	Filter Name	Description	Destination
<input checked="" type="checkbox"/>	1	27739	VKC	invalid credentials	SMTP
<input type="checkbox"/>	2	24560	eg_test_smtp		SMTP
<input type="checkbox"/>	3	24559	eg_test_snmp		SNMP

Figure 36 - Example of alarm forwarding filters

Also for some critical alarms it could be convenient to receive them by email at your desk or on your mobile handset.

In accordance with ITU X.733 recommendations, OCPIC Network and Service Alarm can forward traffic, service and system alarms to an upper global fault management platform or to a mailbox. With OCPIC Network and Service Alarm events forwarding discriminator, you can define rules to allow the actual forwarding, filter alarms based on user-defined rules, and to forward filtered alarms. This is an ideal combination of functions to manage protocol errors, errors in message signal units, hardware failure notifications and to make network administrators aware of real-time QoS indicators.

An SNMP agent in accordance with ITU X.721 recommendation is available and its MIB can be shared in order to integrate OCPIC alarms into an umbrella system.

Filter Creation Dialog

Destination ○ - ● - ○
Active

SNMP
 SMTP

Email List
 user1@test.com, user2@test.com

Note: Please provide email ids with comma separated(", " e.g. red.dog@mycompany.com, blue.cat@mycompany.com).

Figure 37 - Example of alarm forwarding configuration for destination

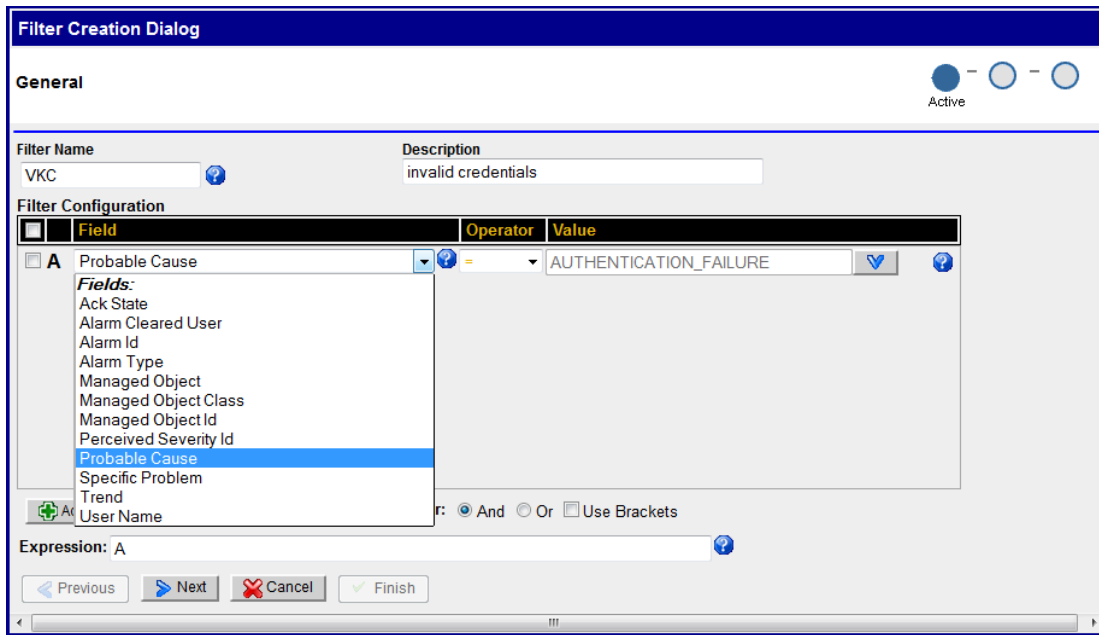


Figure 38 - Example of alarm forwarding configuration for filtering

3.2.7 OCPIC SS7 Management – SS7 network diagnostic (Integrated Acquisition)

OCPIC SS7 Management is an application developed to analyze SS7 link information from the OCPIC Integrated Acquisition for low speed links (LSLs) and high speed links (HSL).

OCPIC SS7 Management provides immediate visual notification, and details, of any L2/L3 events that could impede or prevent the transport of SS7 traffic in a CSP’s network. The CSP is provided with immediate indication of revenue threatening situations and can move quickly to initiate corrective actions. Further, the effectiveness of any corrective actions will be immediately displayed thereby providing an additional level of confidence that the problem has really been fixed.

Functioning as a near real-time application, OCPIC SS7 Management indicates status of nodes, linksets and links that make up a network. It provides continuous assessment of overall network health by displaying the link(s)/node(s) status and link state counters within a network. Following is the architecture overview:

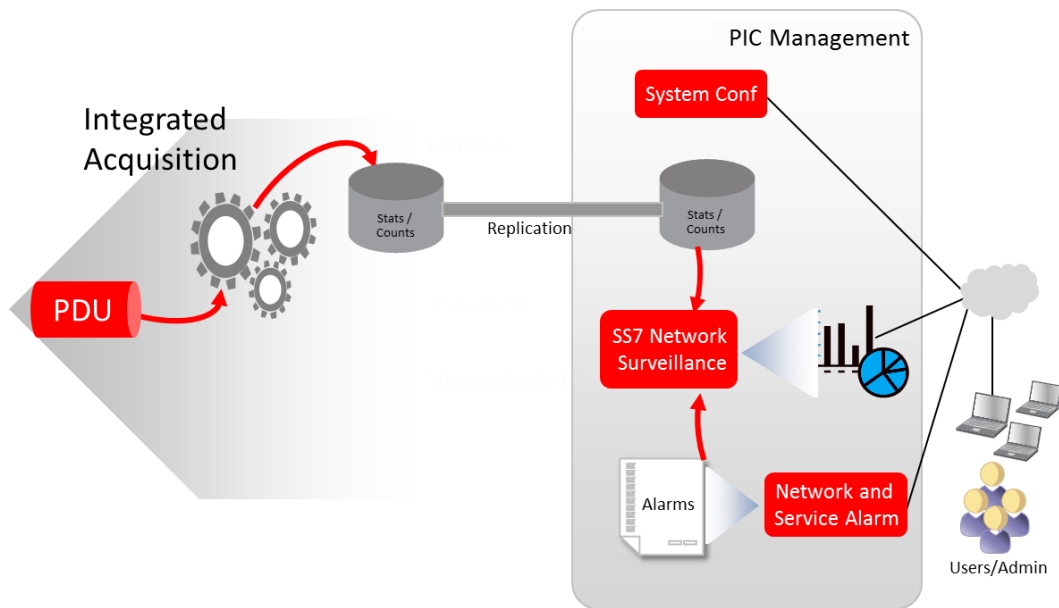


Figure 39 - OCPIC SS7 Management Architecture

OCPIC SS7 Management is a OCPIC Management resident application that can either be invoked directly from the portal or via an inter-application link from OCPIC Network and Service Alarm. The application provides a number of features.

OCPIC SS7 Management has a nice GUI:

- The object tree provides a graphic representation of the nodes, linksets and links in the system
- Configurable and customize colors
- Configurable auto refresh rate 1, 3 or 5 seconds (default 5 secs)
- Ability to reset counters
- Tabular and graphical display options
- Ability to export data to PNG file
- Enables to export all the data in the table that is shown in the monitoring page
- Check the status and state for linksets from OCPIC Network and Service Alarm viewer

The user can select all nodes in the network or a particular subset of interest (e.g., specific region). Once selected, OCPIC SS7 Management will indicate the status of the nodes by different user assigned colors and informational elements.

When you select a monitoring option and open an element, a separate page opens that shows all the pertinent information of that element (node/linkset/link).

From the Node View the user can click on any node or subset of nodes and OCPIC SS7 Management will expand the view to indicate the status of the linksets associated with the node(s). From this view the user can further expand the view to the individual links themselves. This is illustrated below.

Node / LinkSet / Link	State RX	State TX	MSU %RX	MSU %TX	MSU RX	MSU TX	ISUP RX	ISUP TX	SCCP RX	SCCP TX	SIGNET TX	SIGNET RX
Eagle my_cli	A	A	15	14	409	410	280	282	114	114	0	0
Is linkset6	A	A	12	11	54	53	37	36	14	14	0	0
my_cli-9995-0	A	A	13	10	14	12	10	9	4	3	0	0
my_cli-9995-1	A	A	11	12	13	14	9	9	3	4	0	0
my_cli-9995-2	A	A	13	10	14	13	9	9	4	3	0	0
my_cli-9995-3	A	A	11	12	13	14	9	9	3	4	0	0
Is linkset8	A	A	12	11	54	53	37	36	14	14	0	0
my_cli-9997-0	A	A	13	10	14	12	10	9	4	3	0	0
my_cli-9997-1	A	A	11	12	13	14	9	9	3	4	0	0
my_cli-9997-2	A	A	13	10	14	13	9	9	4	3	0	0
my_cli-9997-3	A	A	11	12	13	14	9	9	3	4	0	0
Is linkset5	A	A	12	11	52	53	35	37	15	15	0	0
my_cli-9994-0	A	A	13	10	14	13	9	9	4	3	0	0
my_cli-9994-1	A	A	11	12	12	14	8	10	3	4	0	0
my_cli-9994-2	A	A	13	10	14	12	10	8	4	4	0	0
my_cli-9994-3	A	A	11	12	12	14	8	10	4	4	0	0
Is linkset1	A	A	22	20	98	99	68	68	28	28	0	0
my_cli-9990-0	A	A	22	20	25	25	17	17	7	7	0	0
my_cli-9990-1	A	A	22	21	24	25	17	17	7	7	0	0
my_cli-9990-2	A	A	22	20	25	24	17	17	7	7	0	0
my_cli-9990-3	A	A	22	20	24	25	17	17	7	7	0	0
Is linkset7	A	A	12	11	52	53	35	37	15	15	0	0
my_cli-9996-0	A	A	13	10	14	13	9	9	4	3	0	0
my_cli-9996-1	A	A	11	12	12	14	8	10	3	4	0	0
my_cli-9996-2	A	A	13	10	14	12	10	8	4	4	0	0
my_cli-9996-3	A	A	11	12	12	14	8	10	4	4	0	0
Is linkset9	A	A	22	20	99	99	68	68	28	28	0	0
my_cli-9998-0	A	A	22	21	25	24	17	17	7	7	0	0
my_cli-9998-1	A	A	22	20	25	25	17	17	7	7	0	0
my_cli-9998-2	A	A	22	20	25	25	17	17	7	7	0	0
my_cli-9998-3	A	A	22	20	24	25	17	17	7	7	0	0

Figure 40 - Linkset view

The OCPIC SS7 Management application presents a user with a choice of following monitoring counts and statistics for the element (node/linkset/link):

- Link status - monitors the status of a link(s): state of the link and message counter per SIO
- Link state - monitors the state of a link(s): counters about state messages, retransmission and errors
- NetMgmt transfer signals - monitors the transfer information
- NetMgmt signal route - monitors the route information
- NetMgmt others - monitors other information about inhibition and restart

3.2.8 OCPIC SS7 Management – SIGTRAN network diagnostic (Integrated Acquisition)

OCPIC SS7 Management manage also SIGTRAN based SS7 networks gathered from the OCPIC Integrated Acquisition.

OCPIC SS7 Management provides immediate visual notification, and details, of SIGTRAN events that could impede or prevent the transport of SIGTRAN traffic in an CSP's network.

OCPIC SS7 Management monitors and displays diagnostics data (status and counters) for SIGTRAN layers e.g. SCTP, M2PA, M3UA and SUA.

Functioning as a near real-time application, OCPIC SS7 Management indicates state and status of application servers, application server processes, links, linksets, associations, cards that make up a network. OCPIC SS7 Management application is integrated into OCPIC Management and functions on a network view context. OCPIC SS7 Management provides the capability to view overall status of elements as well as to drill down to individual links and associations

There is a nice GUI:

- Display status and statistics on the various SIGTRAN application server, application server processes, linksets, links, cards and associations that make up the network.
- Choice of following monitoring counts and statistics:
 - Top N occupancy and TPS details
 - Configurable and customizable colors
 - Configurable auto refresh rate 1, 3 or 5 seconds (default 5 secs)
 - Ability to reset counters
 - Tabular and graphical display options
- Allows the user to select which counters and elements to display and choose the display type: tabular or graphical
- Ability to customize display
- Hide columns
- Change layout
- Ability to export data to PNG file
- Enables to export all the data in the table that is shown in the monitoring page

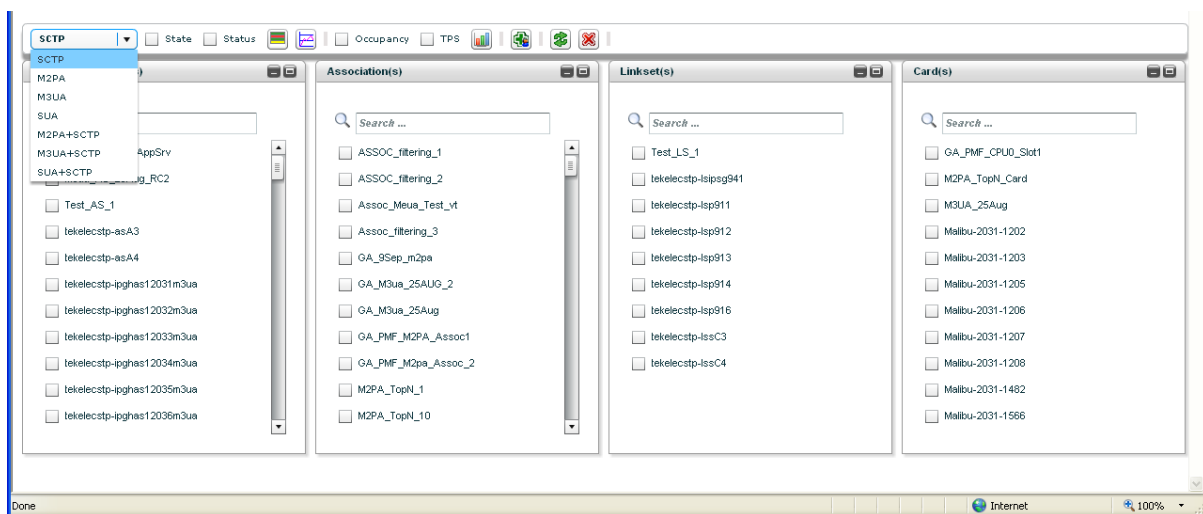


Figure 41 – SS7 Management SIGTRAN main screen

3.2.8.1 STATE COUNTERS

SCTP:

- Heartbeat requests Rx/Tx
- Heartbeat ACKS Rx/Tx
- Operation Errors Rx/Tx
- Shutdown Rx/Tx
- Abort Rx/Tx

M2PA:

- Alignment Rx/Tx
- Proving normal Rx/Tx
- Emergency Rx/Tx
- Out of service Rx/Tx
- Processor outage Rx/Tx
- Busy Rx/Tx

M3UA:

- Management messages Rx/Tx
- SSNM messages Rx/Tx
- ASPSM messages Rx/Tx
- ASPTM messages Rx/Tx
- RKM messages Rx/Tx
- Destination unavailable Rx/Tx
- Signaling congestion Rx/Tx

3.2.8.2 STATUS COUNTERS**SCTP:**

- # Control chunks Rx/Tx
- # Data chunks Rx/Tx
- # Control Bytes Rx/Tx
- # Data bytes Rx/Tx
- Total packets Rx/Tx
- Total bytes Rx/Tx

M2PA:

- # UDMs rx/Tx
- # UDM bytes Rx/Tx
- SS7 SCCP messages Rx/Tx
- SS7 ISUP messages Rx/Tx
- SS7 management messages Rx/Tx
- SS7 message bytes Rx/Tx
- Total messages Rx/Tx
- Current TPS Rx/Tx
- Occupancy % (TPS) Rx/Tx
- Reserved occupancy % Rx/Tx

M3UA:

- Non-data messages Rx/Tx
- Non-data message bytes Rx/Tx
- Data messages Rx/Tx
- Data message bytes Rx/Tx
- Current TPS Rx/Tx
- SCCP message Rx/Tx
- ISUP message Rx/Tx
- Total messages Rx/Tx
- % Total Occupancy (TPS) Rx/Tx
- Reserved occupancy % (TPS) Rx/Tx (Available only for links)

SUA :

- Management messages Rx/Tx
- Management message bytes Rx/Tx
- Data messages (CLDT + CLDR) Rx/Tx
- Data messages (CLDT + CLDR) bytes Rx/Tx
- Total messages Rx/Tx
- Total messages bytes Rx/Tx
- Current TPS Rx/Tx
- Total occupancy % Rx/Tx

3.2.9 Q.752 Application (EAGLE Integrated Acquisition)

In order to manage effectively the resources provided by a signaling system n° 7 network, it is necessary to monitor and measure the present, and estimate the future performance, utilization and availability of these resources.

The values measured are compared to a predetermined threshold for "regular traffic." When a value exceeds the predetermined threshold, an alarm normally is generated, and a notification might be sent to maintenance personnel. In this way, SS7 network monitoring helps the CSP detect security breaches.

Q.752 defines a standard set of measurements (statistical counts) and alarms for monitoring the health of SS7 networks.

Q.752 application supports a large number of counts and statistics. A snapshot of the Q752 counters that are supported by the OCPIC system is as follows:

<input type="checkbox"/>		Table	Description	Period	Name	
<input type="checkbox"/>		1	MTP - Signalling link fault and performance	30'	Q752_1	
<input type="checkbox"/>		2	MTP - Signalling link availability	30'	Q752_2	
<input type="checkbox"/>		3	MTP - Signalling link utilization	5'	Q752_3	
<input type="checkbox"/>		4	MTP - Signalling link set and route set availability	30'	Q752_4	
<input type="checkbox"/>		5	6	MTP - Signalling link traffic distribution	30'	Q752_6
<input type="checkbox"/>		6	7	SCCP - Error performance	30'	Q752_7
<input type="checkbox"/>		7	9	SCCP - Utilization	5'	Q752_9
<input type="checkbox"/>		8	9 bis	SCCP - Quality of service	5'	Q752_9bis
<input type="checkbox"/>		9	11	ISUP - Utilization	5'	Q752_11
<input type="checkbox"/>		10	-	ISUP - Call failure measurement	30'	Q752_ISUPFailCau
<input type="checkbox"/>		11	-	MTP - Signalling link occupancy rate	5'	Q752_SLOR

Figure 42 - Q.752 counters supported

The Q.752 counters need to be activated at the OCPIC Integrated Acquisition and thresholds for the generation of alarms must be set. By default the configuration sets the status of the counters to true and has default threshold values set. The user can modify the low and high threshold of any of the counts and the effect will take place after 10 seconds.

Figure 43 - Q.752 alarm threshold

The *XDR browser* application is used to view these Q.752 counters. All the counts are stored in the sessions. Q752 sessions can be identified by the session name. The session name will typically have Mediation Subsystem name_<Q752 Counter name> For example: Table 1 session for *OCPIC*

Mediation (IXP) Subsystem that has name: Mediation' Subsystem1 will look as "Mediation' Subsystem1_Q752_1".

3.2.10 SIGTRAN statistics and alarms

OCPIC provides SIGTRAN statistics on the following layers:

- SCTP
- M2PA
- M3UA
- SUA

3.2.10.1 SCTP STATISTIC AND ALARMS

Statistics provided:

- SCTP association availability
- SCTP association performance (e.g. message counts, message rate, checksum error counts, etc)
- SCTP retransmissions

Alarms:

- Alarms related to the above statistics can be generated thanks to OCPIC Management KPI application: Statistical alarm if % SCTP retransmissions is higher than a user-defined threshold. OCPIC Management KPI application alarms generated on Statistics session
- SCTP associations loss and recovery alarms (endpoint failure detection)
- SCTP path failure loss and recovery alarms (multi-homed path loss)

3.2.10.2 M2PA STATISTICS AND ALARMS

Statistics :

- Number of Signaling link Congestion
- % of time a link is congested in a statistics period
- Number of Changeovers
- Number of Link Alignment procedures

Alarms

- Alarms related to the above statistics can be generated thanks to OCPIC Management KPI application.
- Alarm on detection of transmit congestion
- Alarm on changeovers: alarm if number of changeovers is higher as a user-defined threshold on the statistics period
- Alarm on link alignment procedures: alarm if number of alignment is higher as a user-defined threshold on the statistics period

3.2.10.3 M3UA STATISTICS AND ALARMS

Statistics are provided per link ID (Association), per point code and per user part:

- Number of events & total duration: (per association & point code)
- Signaling congestion (SCON)
- Destination unavailable (DUNA)
- Destination user part unavailable (DUPU): also per user part
- Number of ASP (Application service part) down and total duration per statistical period
- Number of changeovers: per link ID and point code

Alarms:

- Alarms related to the above statistics can be generated thanks to OCPIC Management KPI application.
- Statistical alarms on the number of occurrences of the events: SCON, DUNA, DUPU
- Statistical alarm on the number of changeovers: per link ID & point code
- Statistical alarm on total ASP down per period

3.2.10.4 SUA STATISTICS

Statistics per association and point codes:

- Number of events & total duration
- Signaling congestion (SCON)
- Destination unavailable (DUNA)
- Destination restricted (DRST)
- Destination user part unavailable (DUPU): also per user part
- Number of ASP (Application service part) down and total duration
- Number of connection oriented SUA messages sent & received per period (Connection refused: COREF)

Related alarms can be generated thanks to OCPIC Management KPI application:

- Statistical alarms on the number of occurrences of the events: SCON, DUNA, DRST, DUPU
- Statistical alarm on total ASP down per period
- Statistical alarms on connection oriented SUA messages sent & received per period (Connection Refused: COREF)

3.3 OCPIC MEDIATION

3.3.1 OCPIC Mediation

OCPIC Mediation subsystem performs core functions of real-time correlation of PDUs into XDRs. It generates Key Performance Indicators (KPI), counts and corresponding QoS alarms in real time. It receives the OCPIC Mediation data stream and stores XDRs and KPIs in an Oracle Database and PDUs into a flat file database for subsequent data requests.

This data can be analyzed in real-time for such functions as call trace as well as analyze KPIs to trigger alarms or reports on network and service status and state. Historical data analysis can be performed for trend or QoS/QoE analysis on traffic, resource utilization or network services as examples.

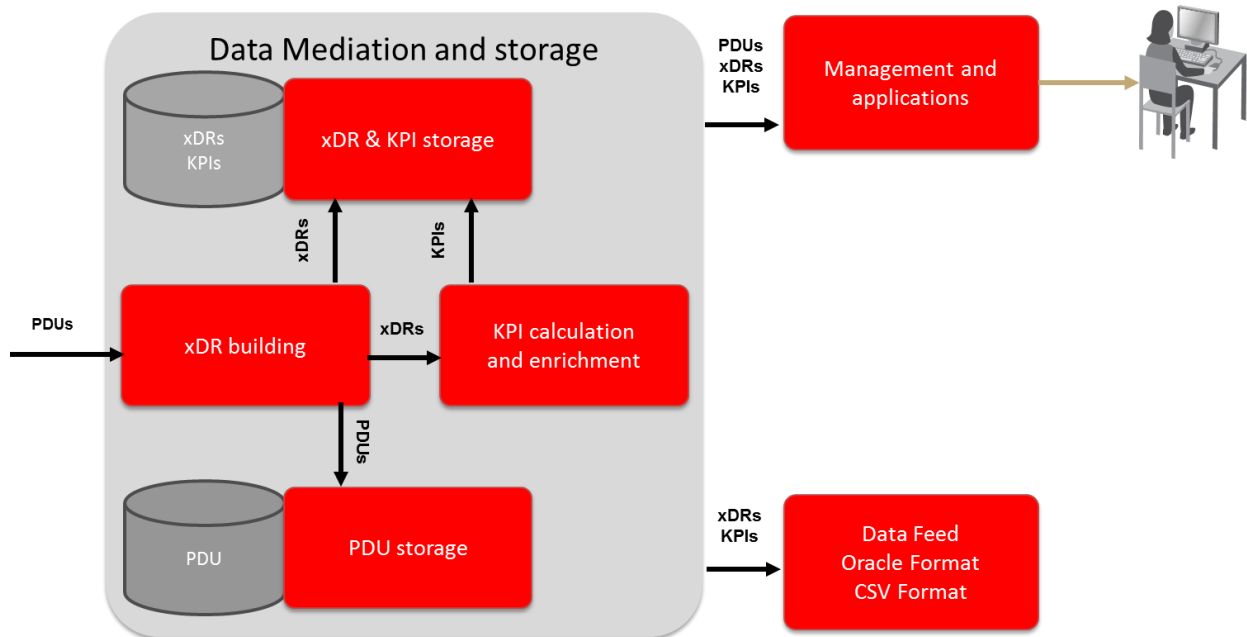


Figure 44 - OCPIC Mediation

OCPIC Mediation XDR correlation for multiple network types based on an array of protocols is accomplished with a library of XDR builders. The desired builder can be selected for the appropriate network and traffic type such as ISUP, TCAP, SIP, Diameter, etc. The XDR library is comprehensive with over 120+ protocols supported on a global basis for most any wire line, wireless, wireless data, VOIP or IMS network.

Mediation is distributed throughout the geographical areas corresponding to traffic capture. Each site may consist of one or several OCPIC Mediation subsystems.

A OCPIC Mediation subsystem is a collection of servers organized in 3 functional areas as depicted in the following diagram:

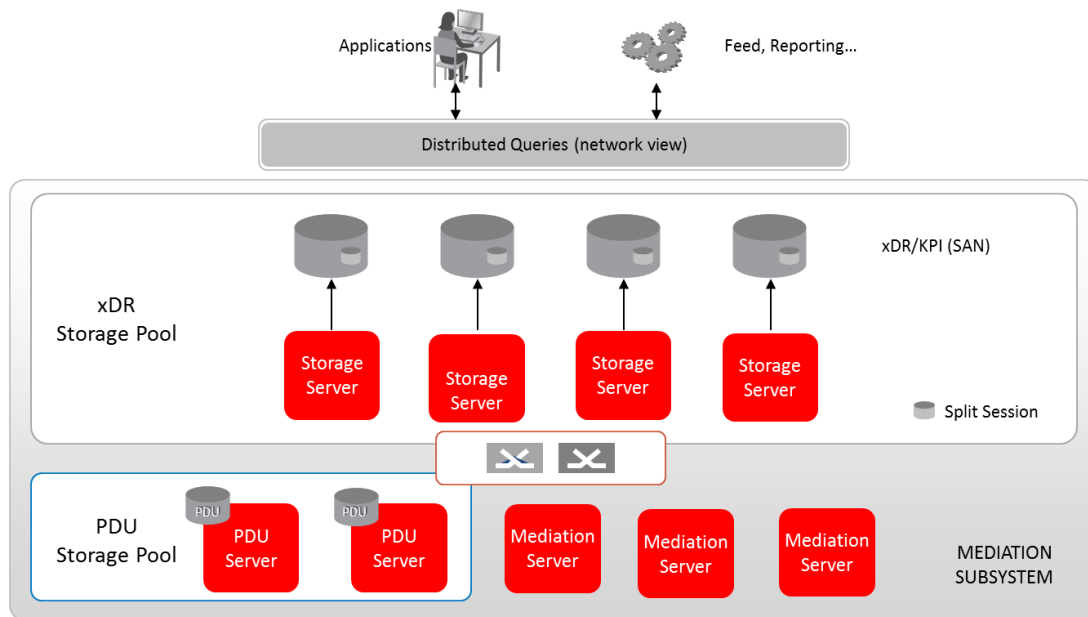


Figure 45 - OCPIC Mediation subsystem overview

3.3.1.1 OCPIC MEDIATION SERVERS

Mediation servers receive real time PDU flows from OCPIC Integrated or stand-alone Acquisition, correlate them and build XDRs accordingly. Process includes dynamic enrichment consisting of enriching XDR with fields that are not present in the related PDUs (e.g. IMSI) but come from the global context (e.g. mobile context) kept by the XDR builder.

Static enrichment may optionally add fields to XDR according to an external user table (e.g. add a network element label from its IP address).

Generated XDRs feed data into OCPIC Management KPI application for generating KPIs and related alarms in real time.

Mediation servers work in load sharing mode so that the system can be easily sized according to the total throughput to be processed.

Virtualized Mediation server:

OCPIC Mediation server can also be virtualized, using VMware or KVM hypervisor (see section 3.6).

3.3.1.2 OCPIC XDR STORAGE POOL

XDR storage pool is the OCPIC XDR and KPI real time data base. A pool is a virtual server consisting of an extensible number of servers allocated to storage and independently from their physical location in enclosures. Each server of the pool runs an autonomous Oracle Database and has its own disk space. Storage is dynamically load-balanced throughout servers of the pool so that a given XDR or KPI session (e.g. MAP XDR session) is evenly distributed over the servers.

If a server goes down, then the xDR traffic is automatically taken over by the other servers of the pool without any loss of data (optional, option N+1 redundancy).

A query to the data base from an application is executed in parallel over all the servers of the pool (distributed queries) so that response time is reduced and the system can scale up to increase the number of simultaneous users.

3.3.1.3 OCPIC PDU STORAGE POOL

PDU storage server stores the PDUs originated from Mediation servers into its integrated PDU database. PDU servers, as XDR servers, are grouped into a pool. Each server of the pool runs an autonomous flat PDU database and has its own disk space. PDU storage is dynamically load-balanced throughout servers of the pool so that PDUs are evenly distributed over the servers.

If a server goes down, then the PDU traffic is automatically taken over by the other servers of the pool without any loss of data (optional, option N+1 redundancy).

Architecture advantages summary:

- Provide flexible linear scaling up:
 - add a storage server (hot plug insertion) to increase storage capacity or number of users independently from Mediation servers
 - or add PDU servers independently from Mediation and XDR storage servers
- Provide optional redundancy mechanism with automatic server failover. This will assure no loss of insertion data in case of server failure

3.3.2 Data Records, Packet Data Units and KPIs Storage on Customer IT infrastructure

As a full alternative to OCPIC internal storage described in sections 3.3.1.2 and 3.3.1.3, it is possible for the customer to use his existing IT storage infrastructure instead of OCPIC internal storage servers. This can be done on a mediation site by site basis

Main advantages for the customer are as follows:

- saving CAPEX and OPEX costs by using Customer existing infrastructure (cloud)
- enabling Customer to size storage duration as needed independently of the limitation of the OCPIC internal storage
- enabling Customer to open access to the databases to non OCPIC Users and Applications

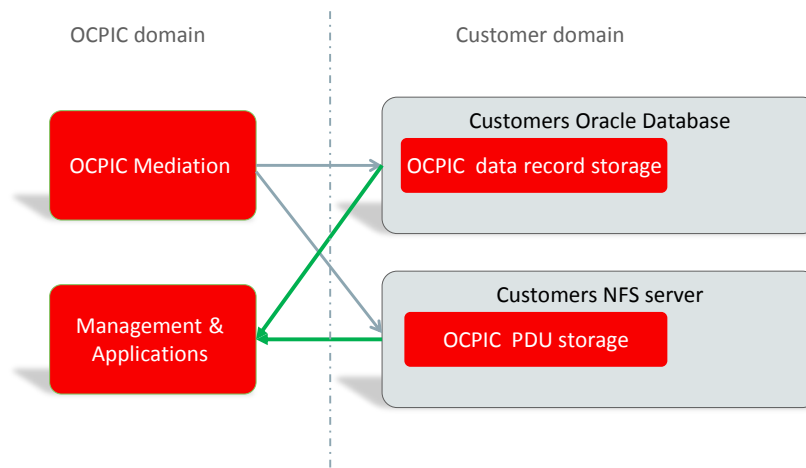


Figure 46 – Data Records, Packet Data Units and KPIs Storage on Customer IT storage infrastructure

3.3.3 XDR builders and protocols

3.3.3.1 XDR BUILDERS

OCPIC generates protocol specific XDRs in real-time in the OCPIC Mediation layer. XDR builders are correlating protocol exchanges in real time. XDR represent the high value from network information. Automatic enrichment of XDR is performed by correlation of multiple protocols allowing integration of IMSI, MSISDN, cell ID, EMEI, APN etc in XDR.

The XDR can be from multiple types:

- TDR for transaction based protocols (MAP, INAP, IS 41...)
- CDR for call based protocols (ISUP...)
- SDR for session based services (PDP session)

The XDR can be browsed with the XDR browser and be processed by OCPIC Management KPI application to generate high value service oriented KPIs.

3.3.3.2 STATIC XDR ENRICHMENT

OCPIC enables XDR enrichment with high value customer or network information. The static XDR enrichment reads a text file built with external data and external application to add useful information in real time in all the XDRs which match the filtering conditions.

Typical uses cases are:

- Country and operator recognition in SCCP calling or called global title
- Tagging VIPs based on their IMSI or MSIDN to later build related KPIs for SLA management
- LERG management in the context North American numbering plan
- Identifying carrier based on the node addresses

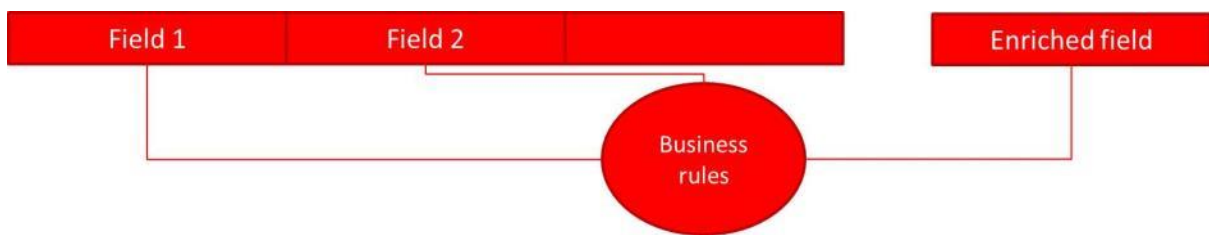


Figure 47 - Static XDR enrichment principle

On the other side, the automatic static enrichment update enables to automatically and periodically populate the static enrichment information from customer database without any manual process as shown in the diagram below.

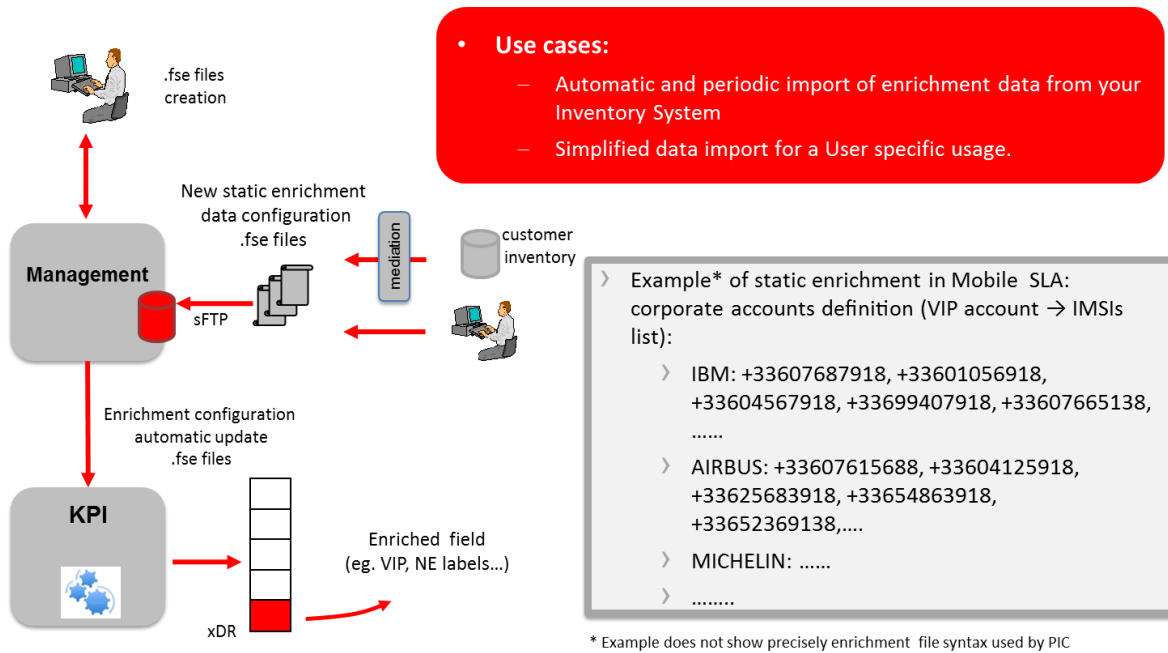


Figure 48 – Automatic static enrichment update

3.3.3.3 PROTOCOLS

OCPIC supports a very broad array of protocols. For the complete list of supported protocols refer to Appendix B.

OCPIC system is compliant with IPv6/IPv4 addressing formats. All IPv4 addresses remain displayed in IPv4 format while IPv6 addresses are displayed in IPv6 format.

All XDRs contain IPv6/IPv4 compatible addresses, with the exception of SIGTRAN CDRs which support only IPv4 addresses.

3.4 OCPIC MEDIATION DATA FEED

OCPIC Mediation Data Feed is a capability to export/transmit signaling data – XDRs and KPIs (Key Performance Indicator) – captured and/or created by the OCPIC platform, to external 3rd party applications and databases. Following is the architecture overview for the Data Feeds:

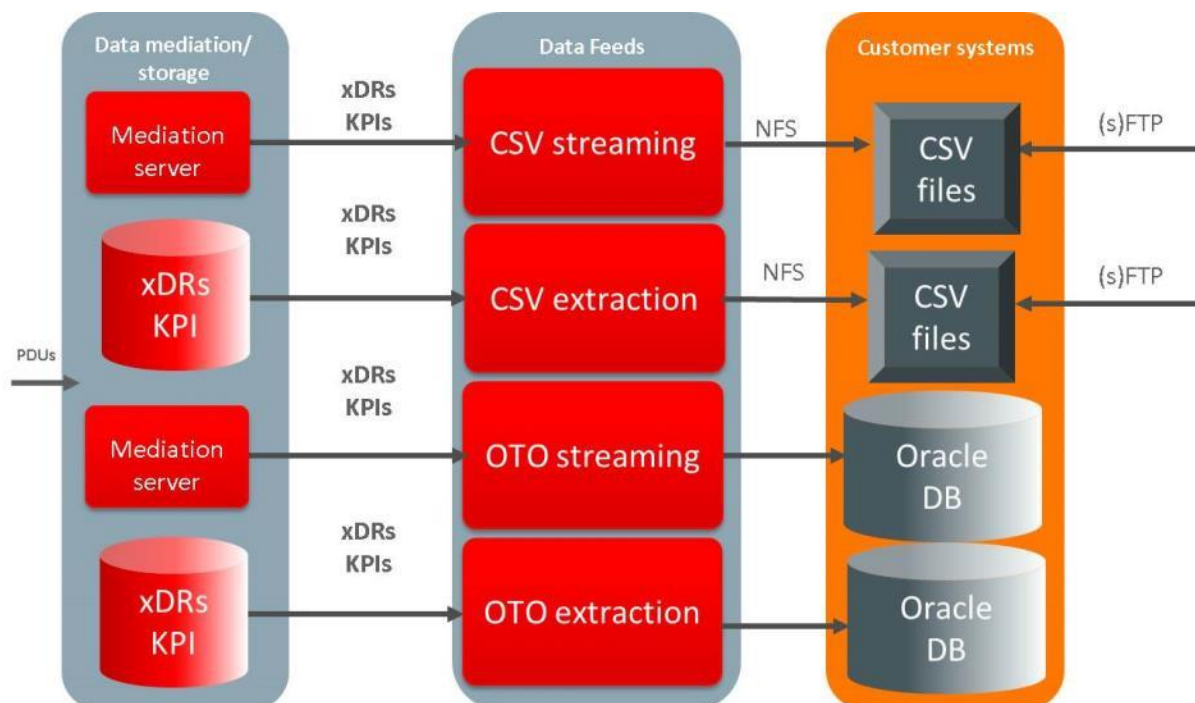


Figure 49 - OCPIC Mediation Data Feed

All the data feeds carry out their function from the OCPIC Mediation subsystem which is the correlation and storage subsystem.

The XDR/KPI records can be exported from the OCPIC system using the following modes:

- CSV streaming
- CSV extraction
- OTO streaming
- OTO extraction

There is also a MSU data feed that maybe be activated directly from the OCPIC Integrated or stand-alone Acquisition. It is called Acquisition Data Feed and will be described into more details later in this document.

3.4.1 OCPIC Mediation Data Feed general features

The following general features apply to all the OCPIC Mediation Data Feed:

- Centralized configuration of the data feeds under OCPIC Management
- Export of data based on schedule (automatic mode)
- Various format of export file (txt, csv, Oracle,...)
- Filtering of exported data based on specific parameters, related to specific subscriber (IMSI/MSISDN) or network element (APN name, SGSN/GGSN IP address)

- Data can be exported from multiple OCPIC Mediation sub-systems
- Monitor the status and progress of the OCPIC Mediation Data Feed
- System surveillance and recovery

3.4.2 OCPIC Acquisition Data Feed - MSU data feed from the OCPIC Integrated or Probed Acquisition

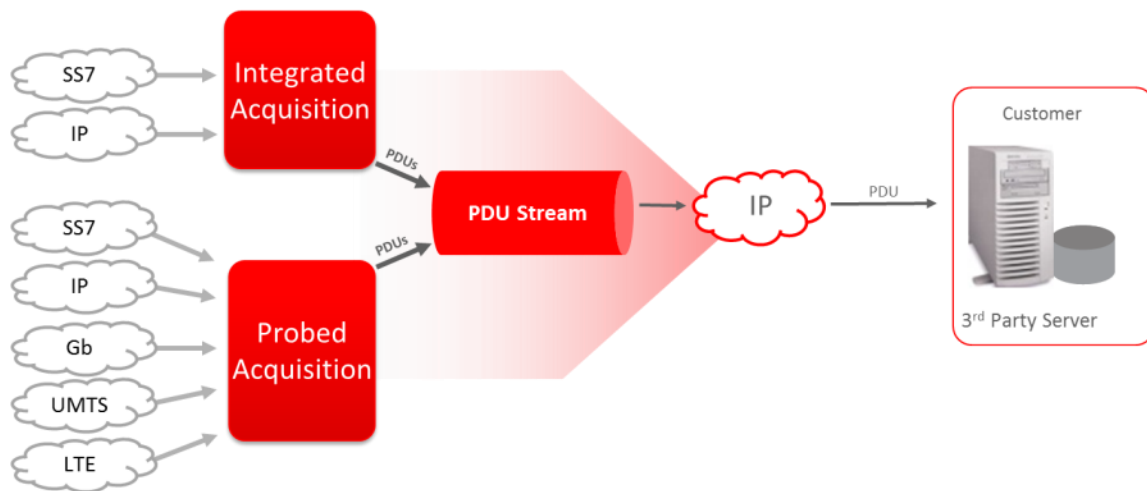


Figure 50 – OCPIC Acquisition Data Feed Architecture

Oracle has developed OCPIC Acquisition Data Feed to allow direct MSU data feed from the OCPIC Integrated or Probed Acquisition to the customer 3rd party server. OCPIC Acquisition Data Feed is a Oracle provided software compatible with Linux OS. It establishes a Linux process that allows for the establishment of a LAN/WAN connection from all XMFs at a site to the customer 3rd party server. The customer server can be located at the site with the OCPIC Acquisition or may be located remotely. If connection is lost an alarm is triggered.

The MSU/IP packets are stored in single file/single directory, or multiple files/single directory or multiple files/multiple directories according to the configuration. Each record contains the full MSU/IP packet + a header. The file is rotated at configurable interval (from 15 sec to 1 hour) and it is renamed when it is closed.

OCPIC Acquisition Data Feed is compatible with the filterable MSU capability of OCPIC. It is available from all of the following OCPIC Integrated or stand-alone Acquisition interfaces, for any of the protocol carried on the interface:

- LSL/HSL (through converter)
- SIGTRAN
- IP
- EAGLE

3.5 OCPIC DATA ACQUISITION

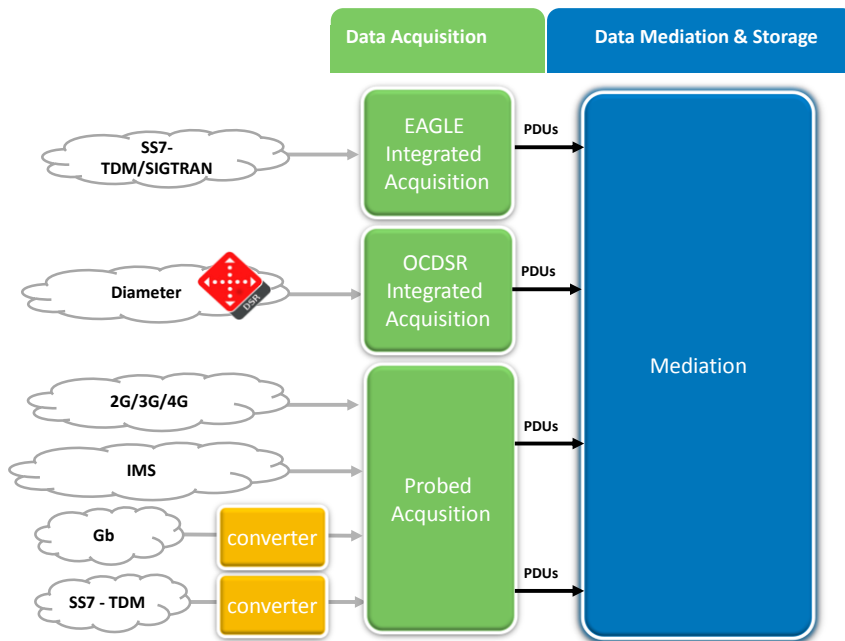


Figure 51 – OCPIC Acquisition Architecture

3.5.1 OCPIC Integrated Acquisition

3.5.1.1 OCPIC INTEGRATED ACQUISITION ARCHITECTURE

OCPIC Integrated Acquisition is a data acquisition component that provides integrated signaling acquisition in conjunction with the EAGLE.

Inputs to the OCPIC Integrated Acquisition are signaling frames acquired from EAGLE. Outputs from the OCPIC Integrated Acquisition are filtered frames with timestamps. The primary functions of the OCPIC Integrated Acquisition are:

- Data Acquisition: to support a highly, reliable architecture for signaling message capture.
- 6 h buffering, this option allows frames to be buffered to avoid data loss in the event of network problems.
- Filtering to ensure non-relevant frames are identified and discarded. The filters, which consist of any combination of fields, are fully configurable. Arithmetic expressions can also be included.
- Routing to provide secure transport to the proper mediation processing resource according to configurable criteria.

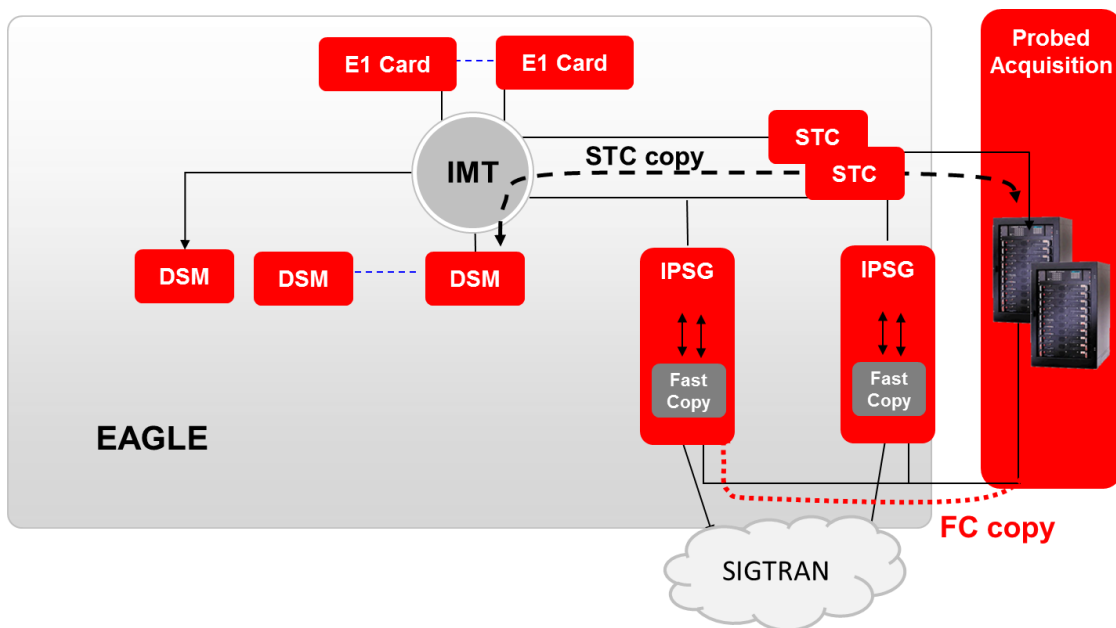


Figure 52 - OCPIC Integrated Acquisition Architecture

OCPIC Integrated Acquisition provides the capability to monitor the signaling link interfaces supported on the EAGLE LIM cards, including LSL, ATM HSL, SE HSL, and SIGTRAN (M2PA and M3UA).

Time stamping of signaling messages captured is made at the message copy source as the messages are copied. Time stamping is synchronized using the Network Timing Protocol (NTP) using a centralized NTP server assigned on a system basis.

Communication between the OCPIC Integrated Acquisition and the EAGLE to forward the MSU is available through 2 modes:

STC copy

In this mode, MSUs for the monitored linksets are copied from the EAGLE cards through the IMT bus to the STC cards. The STC cards are then forwarding the MSU to the OCPIC Integrated Acquisition.

Fast copy

To avoid monitoring traffic presence on the IMT bus and to reduce the copy overhead on the EAGLE cards for SIGTRAN traffic, IPSG and IPGW E5Enet cards implement a fast copy mechanism. Full capacity of EAGLE card and IMT bus is available for customer operational traffic.

Fast copy is available on Enet IPSG cards. Monitoring of other cards is available on STC copy. Fast Copy and STC copy are supported concurrently on the OCPIC Integrated Acquisition.

3.5.1.2 OCPIC INTEGRATED ACQUISITION RELIABILITY

The OCPIC Integrated Acquisition provides reliability with the following attributes:

- Optional automatic failover to the N+1 server if a failure occurs on any OCPIC Integrated Acquisition in the subsystem
- Redundant LAN architecture for interface reliability to the EAGLE
- Redundant WAN access architecture for interface reliability to the OCPIC Mediation
- Mirrored drives for reliability and to enable live upgrade of OCPIC Integrated Acquisition servers

3.5.1.3 OCPIC INTEGRATED ACQUISITION 6H BUFFERING

OCPIC Integrated Acquisition provides buffering and storage of processed signaling information associated with the interface protocol used for secure transfer of the message signaling PDUs to downstream correlation servers thus mitigating WAN outages

When configured on the OCPIC Integrated Acquisition, buffering of signaling data from monitored links for up to 6 hours is performed on the OCPIC Integrated Acquisition in case of network outage. When the outage event is cleared, the buffered data are sent to the OCPIC Mediation for correlation and XDR builder functions. By default the 6h buffering is activated for the MSU and not for IP raw (see IP raw feature section).

If 6h buffering is not required in customer implementation, it is possible to deactivate completely the functionality in the OCPIC Integrated Acquisition. A reduced buffering function (few seconds) is maintained in memory and OCPIC Integrated Acquisition performances are increased.

3.5.1.4 OCPIC INTEGRATED ACQUISITION FILTERING

OCPIC Integrated Acquisition provides filtering capabilities for filtering and discrimination of protocol signaling messages for creation of protocol data flows and data source connections to mediation layer.

All non-relevant frames can be identified and discarded for data flow creation.

OCPIC Integrated Acquisition supports an extended filter capability mode to create very complex filter algorithms.

3.5.1.5 OCPIC INTEGRATED ACQUISITION AUTOMATIC FAILOVER

In order to allow faster recovery and to avoid reconfiguration issue, in case of failure and after all recovery attempts, the system de-allocates the traffic assigned to the failed OCPIC Integrated Acquisition server and reassigns the traffic from the failed OCPIC Integrated Acquisition server. Nominal traffic analysis is restored automatically.

3.5.1.6 OCPIC INTEGRATED ACQUISITION MANAGEMENT

Through the OCPIC Integrated Acquisition integration with the EAGLE, the configuration of the signaling network is discovered and available in the OCPIC central configuration management. This simplifies and provides an error free mechanism to configure the monitoring.

3.5.1.7 OCPIC INTEGRATED ACQUISITION IP RAW AND MSU FORWARDING OPTION

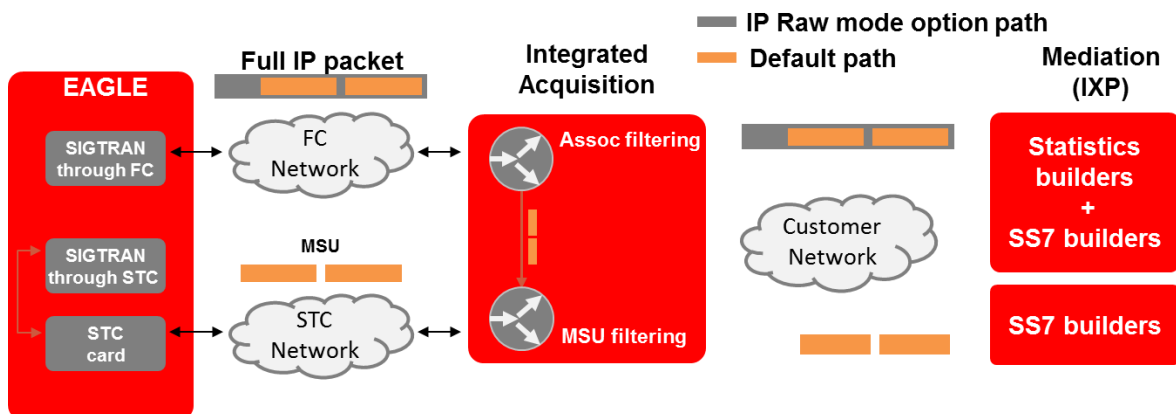


Figure 53 - IP Raw & MSU

By default, the OCPIC Integrated Acquisition is working in MSU forwarding option. Only chunks containing valuable MSU are monitored. This is the best approach to optimize the bandwidth on the customer network and to allow rich set of filtering in the OCPIC Integrated Acquisition. High level SS7 stacks are not impacted and visibility down to the chunk level (M2PA or M3UA) is provided.

If SIGTRAN low layers visibility is requested, with Fast copy, the IP raw option can be activated. In that case, the full IP packet is forwarded to the OCPIC Integrated Acquisition, including all SCTP low layers and management messages. This traffic is used to feed the SIGTRAN low layers builders. It enables in depth troubleshooting for the selected associations and SIGTRAN statistics.

Both modes can be activated simultaneously on the OCPIC Integrated Acquisition server (the IP raw option can be activated per associations).

3.5.1.8 OCPIC INTEGRATED ACQUISITION OPTIONS

2 options are available for integrated acquisition:

- For all configurations (including large configurations)
Integrated acquisition is loaded on standard servers installed inside a frame close to the EAGLE. By adding new servers or switches, this frame dedicated to integrated monitoring, allows scalability up to the monitoring of a fully loaded EAGLE.

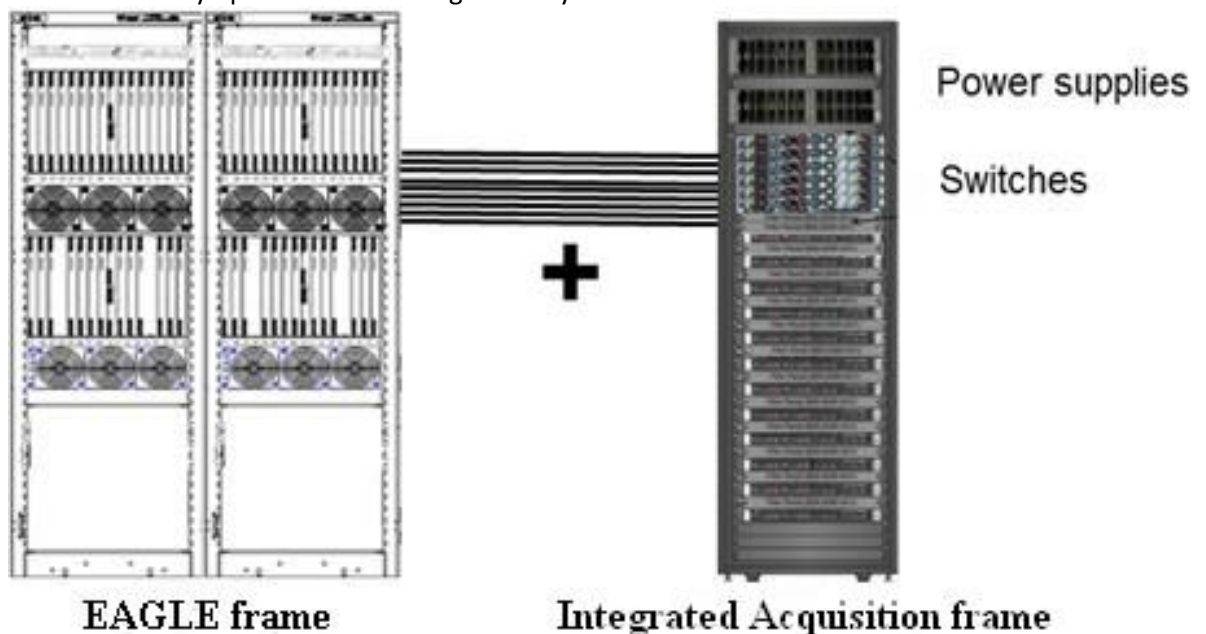


Figure 54 - EAGLE Frame to Integrated Acquisition connection

- For small to medium configuration
For small to medium configuration, the use of a dedicated frame may not be optimized. When configuration allows it, integrated acquisition can be loaded on EAGLE APP-B cards installed inside the EAGLE frame. This option provides several advantages like footprint saving, simplified cabling, no external power supplies (power provided by the EAGLE) and extended life cycle compared to standard servers.

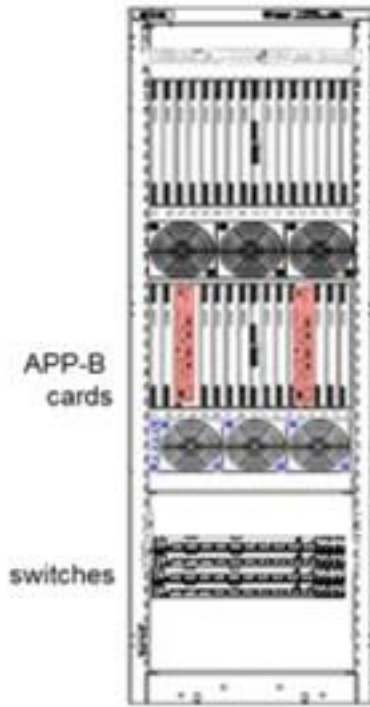


Figure 55: APP-B in the EAGLE frame

For both options, all integrated monitoring functionalities are the same.

3.5.2 OCPIC stand-alone Acquisition

OCPIC stand-alone Acquisition acts as an application level router. It extracts frames from the network using network monitored access (for passive monitoring), timestamps them, and sends this information to the OCPIC Mediation. Some filters can be defined to select only a given set of data.

Acquisition supports specific interfaces for different protocols as reflected in the table below.

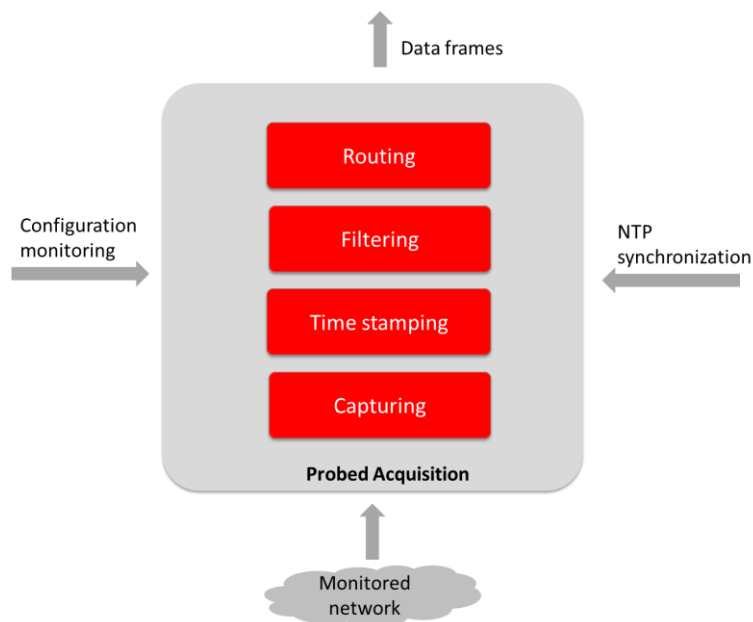


Figure 56 - Overview of OCPIC Probed Acquisition

Table 5 - OCPIC Probed Acquisition feature supported matrix

Network	Physical layer	Network Monitoring Access	Signaling transport
SS7	G703 - G704	Through SS7 to SIGTRAN converter	MTP2 Q703
GSM	G703 - G704	Through SS7 to SIGTRAN converter	MTP2 Q703
GPRS Gb	G703 - G704	Through Gb over E1 to Gb over IP converter	Frame relay
GPRS /UMTS/LTE IP	Ethernet	TAP or port mirroring	IP
SS7- SE-HSL	G703 G704	Through SS7 to SIGTRAN converter	MTP2 Q703
SS7- ATM-HSL	G703 – G704 – ATM	Through SS7 to SIGTRAN converter	SAAL

Virtualized Probed Acquisition server:

OCPIC Probed Acquisition server can also be virtualized, using VMware or KVM hypervisor (see section 3.6).

3.5.2.1 FRAME ACQUISITION

Inputs to the OCPIC Acquisition are signaling frames acquired from the network. Output being frames with timestamps, minus irrelevant data. The primary functions of the Acquisition are:

- Time stamping: To ensure timestamp accuracy and particularly the necessary synchronization of the different message feeders distributed all over the network, each must be synchronized by one or several NTP servers
- 6 hours buffering option for SS7 traffic
- Filtering: All non-relevant frames must be identified and discarded. The filters, which consist of any combination of fields, are fully configurable. Arithmetic expressions can also be included. An extension of filters is now available for SIGTRAN (PC, SSN, SIO and GT).
- Routing: Frames are routed to the proper mediation processing resource according to configurable routing criteria

3.5.2.2 HSL/LSL TO SIGTRAN CONVERTER

Based on market evolution towards SIGTRAN, Oracle is now proposing to use the HSL/LSL to SIGTRAN converter with OCPIC Probed Acquisition IP to replace HSL/LSL legacy old cards. This solution provides smooth migration path for customer still having legacy links and migrating towards SIGTRAN. All investment made on SIGTRAN are preserved and the high capacity of the converter in a very small foot print provides a very efficient solution for legacy links.

The converter is an external high density box positioned in front of a standard OCPIC Probed Acquisition. It extracts the MSU above the MTP2 layer and codes them inside a M2UA SIGTRAN association. All the layers above MTP2 are preserved. Therefore, the conversion doesn't impact the upper layers builder visibility.

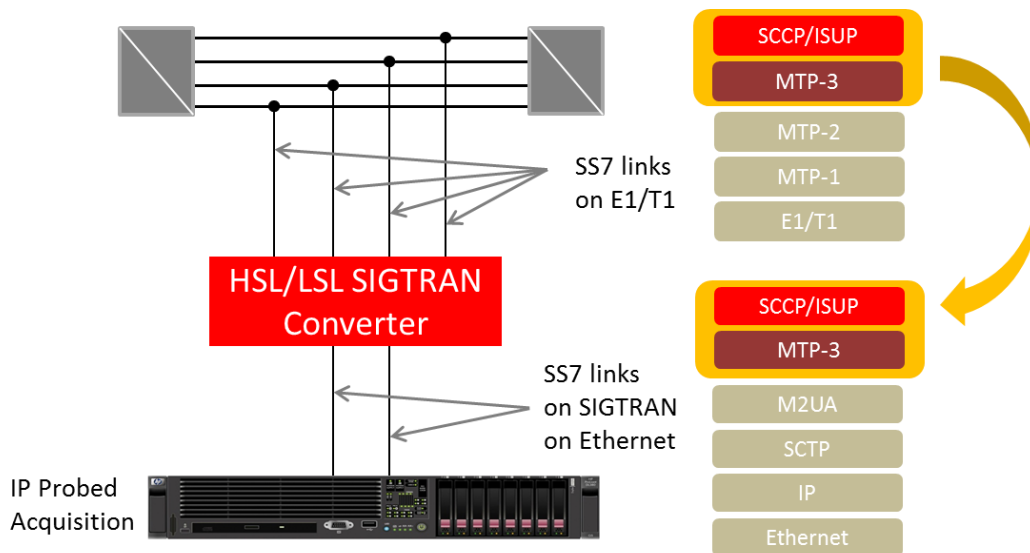


Figure 57 – LSL/HSL to SIGTRAN Converters

The converter is available for E1 or T1, from 64 to 128 links. High concentration connectivity is achieved through external patch panels (balanced 120 Ω and unbalanced 75 Ω circuits are supported). The converter supports up to 200 LSL (for 64 links option) or 400 LSL (for 128 links option)



Figure 58 – LSL/HSL to SIGTRAN Converters – connectivity

Note that the conversion doesn't allow low layer builder to compute information like SLOR, Q752...

Note: The converter implements troubleshooting tools and counters reports accessible through its own interface. This includes:

- Link status: LOS (Loss of Signal), AIS (Alarm Indication Signal), LOF (Loss of Frame), RAI (Remote Alarm Indication) and BPV (Bipolar Violation). Alarms can be generated for link status change.
- Counters:
 - # Synchronizations down, #Frame errors, #CRC4 errors, #LOS, #AIS, #LOF and #RAI
 - ATM counters: #Total Cells, #HEC Errors, #Discarded Cells, #failed Reassemblies, #Forwarded and Discarded Packets.
 - HDLC: #Total Packets, #Frame Check Sequence Errors, # Frame Aborted, #Alignment Errors and #Length Errors.

Note that 56Kb/s in E1 LSL is not supported.

3.5.2.3 Gb OVER E1 TO GBOIP CONVERTER

As for SS7, Oracle is following network evolution to all IP. Oracle is proposing a front head converter before the OCPIC Probed Acquisition to convert Gb over E1 to Gb over IP. This solution provides smooth migration path for customer still having legacy Gb links and migrating towards IP. All investment made on IP are preserved.

The converter is an external high density box positioned in front of a standard OCPIC Probed Acquisition. It extracts the layers encapsulated in the frame relay PVC and codes them inside Gb over IP path. All the layers above frame relay (including NS/BSSGP) are preserved. Therefore, the conversion doesn't impact the Gb builder visibility

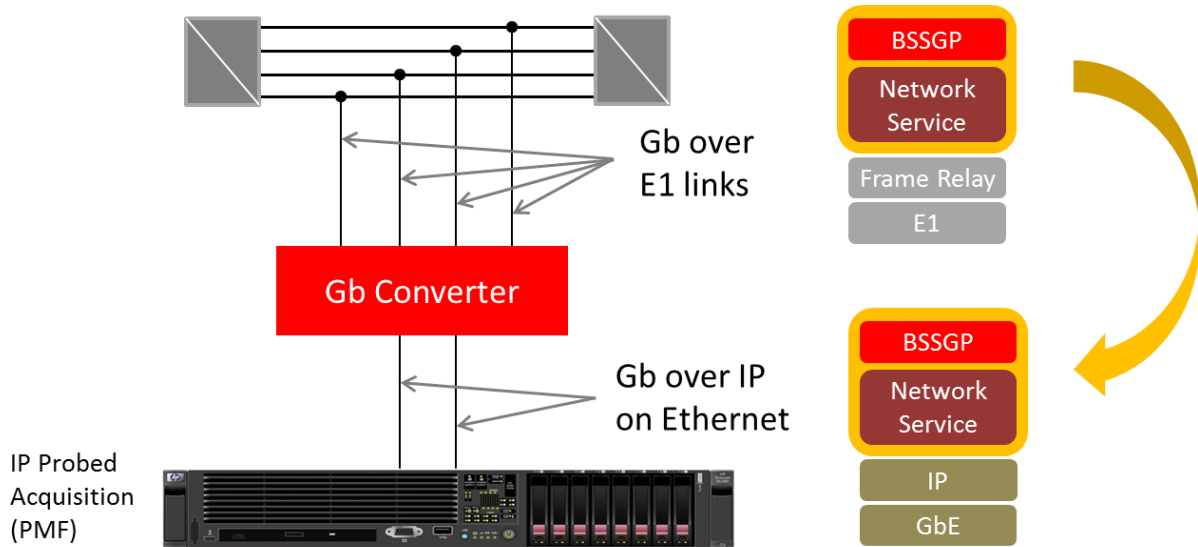


Figure 59 – Gb over E1 to Gb over IP Converter

The converter is available for 64 or 128 Gb over E1 links. High concentration connectivity is achieved through external patch panels (balanced 120 Ω and unbalanced 75 Ω circuits are supported). The converter supports up to 200 frame relay PVC (for 64 links option) or 400 PVC (for 128 links option)

3.5.2.4 PCAP CAPTURE

With OCPIC, detailed PDU are available for each XDR. But for troubleshooting purpose, it is important sometime to have a capture of the packets captured directly on the wire. The *OCPIC Probed Acquisition* IP allows Ethereal like capture and storing directly on the probe.

Filters can be defined to extract only the relevant data for the capture. All *OCPIC Probed Acquisition* filtering rules are applicable including SIGTRAN content filtering. Specifically for SIGTRAN, customer has the capability to capture the IP packets before or after chunk extraction.

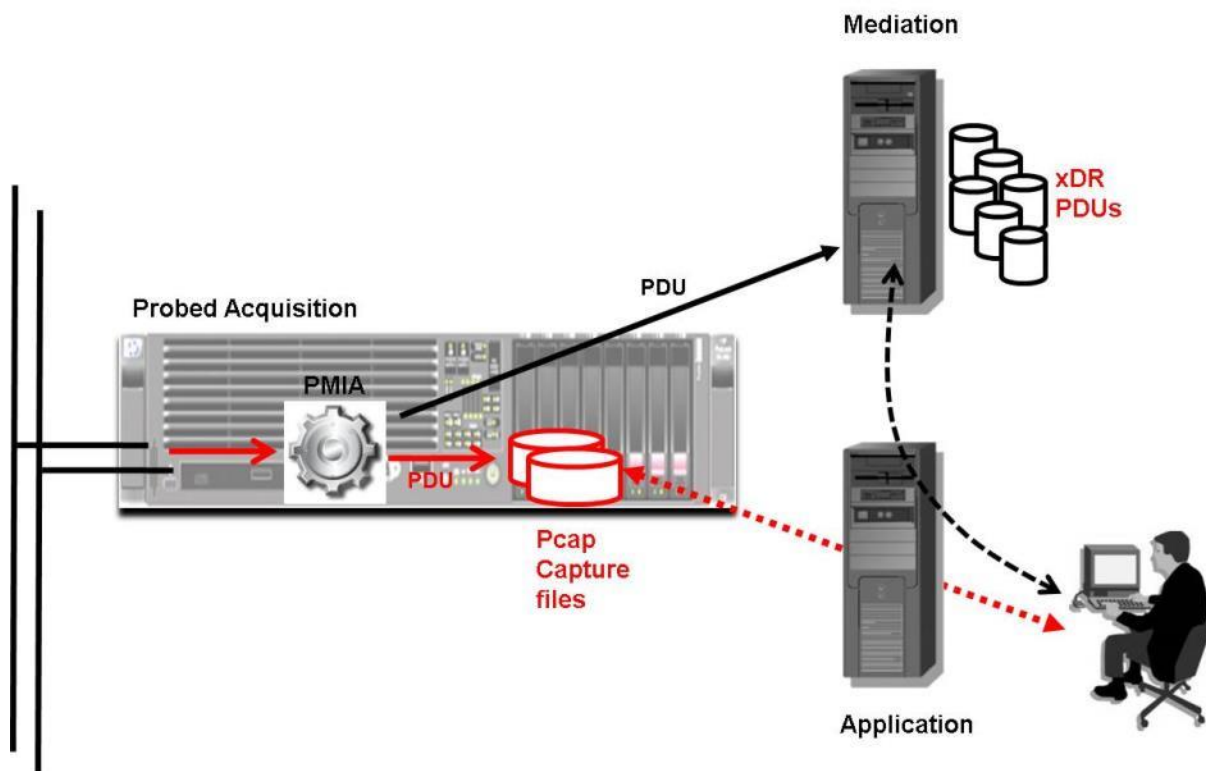


Figure 60 – Pcap capture for OCPIC Probed Acquisition

All configuration including start and stop of the capture is controlled through the configuration. The capture file is created based on standard pcap format (compatible with Ethereal, Wireshark...).

3.5.3 OCDSR Integrated Acquisition

In the OCDSR monitoring case, OCPIC can take benefit of a management link to OCDSR enabling to acquire the configuration tables from OCDSR. This allows OCPIC LTE Diameter xDRs (generic) to be populated with the explicit names of the OCDSR peers equipment which is very convenient for trace and troubleshooting.

This configuration is fully dedicated to OCDSR monitoring and only OCDSR Diameter traffic can be monitored here.

HW configuration is based on Probed Acquisition HW (see §4.2)

PCAP capture (§3.5.2.4) and Acquisition Data Feed (§3.4.2) functions are still valid for OCDSR Integrated Acquisition (OCDSR Diameter traffic only)

OCPIC OCDSR Integrated Acquisition server can also be virtualized, using VMware or KVM hypervisor (see section 3.6).


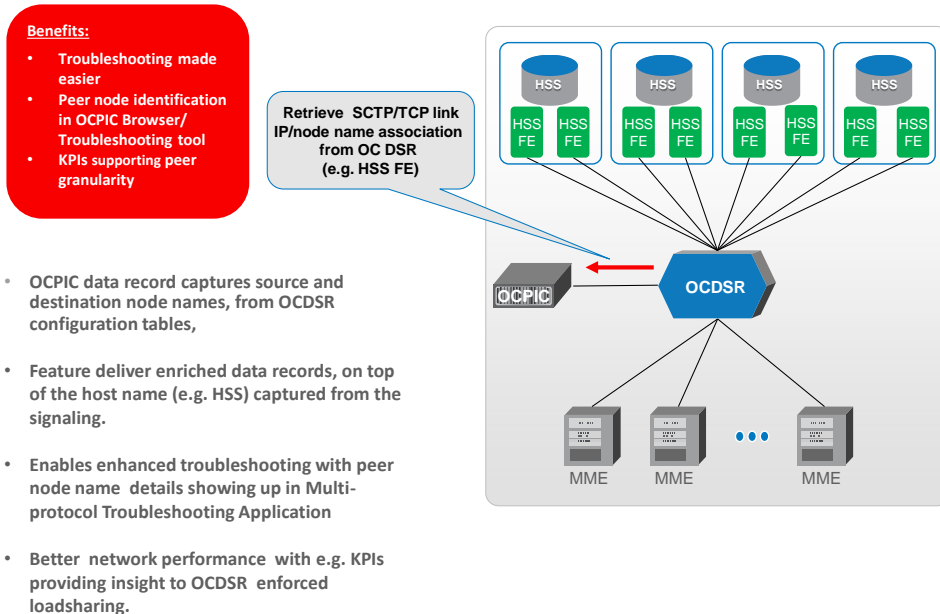


Figure 61 – OCDSR Integrated Acquisition

3.6 OCPIC VIRTUALIZED CONFIGURATIONS SUMMARY

Figure 62 summarizes the possible OCPIC Virtualized Configurations for Acquisition, Mediation and Management.

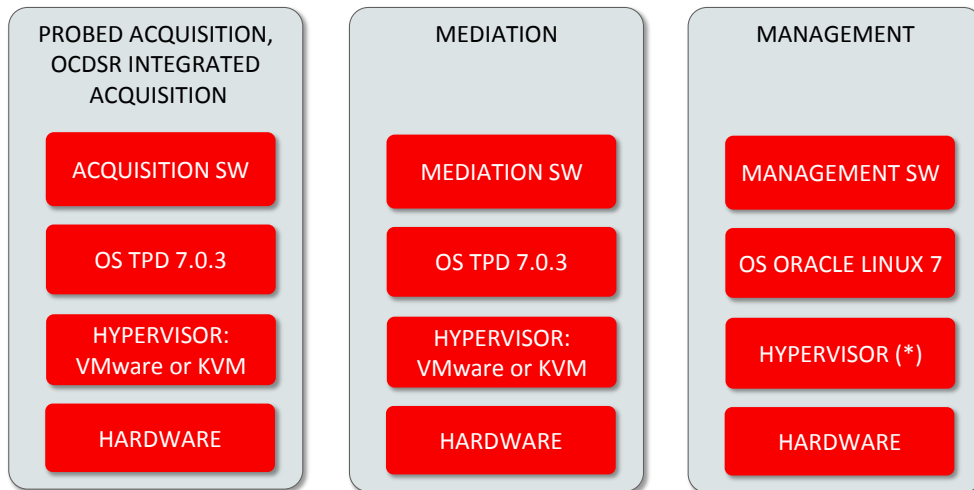

(*) choice upon customer – not tested by Oracle

Figure 62 – OCPIC Virtualized Configurations Summary

Note: EAGLE Integrated Acquisition Server is not virtualizable.

4 APPENDIX A – OCPIC APPLICATION VS. OCPIC ORACLE LICENCES

The table below provides OCPIC part numbers and legacy names when existing.

Table 6 – OCPIC Part Numbers and Legacy Names

P/N	Legacy Name	GoForward Name	Metric
L99456	IMF	Oracle Communications Performance Intelligence Center, Integrated Acquisition	Per Server
L99457	IMF	Oracle Communications Performance Intelligence Center, Integrated Acquisition	Megabits per Second
L99458	PMF	Oracle Communications Performance Intelligence Center, Probed Acquisition	Per Server
L99459	PMF	Oracle Communications Performance Intelligence Center, Probed Acquisition	Megabits per Second
L10XXXX	PMF	Oracle Communications Performance Intelligence Center, OCDSR Acquisition	Server
L104778	PMF	Oracle Communications Performance Intelligence Center, OCDSR Acquisition	Megabits per Second
L99460	TADAPT, MSU Feed	Oracle Communications Performance Intelligence Center, Acquisition Data Feed	Per Server
L99465	Data Feed	Oracle Communications Performance Intelligence Center, Mediation Data Feed - Server Perpetual	Per Server
L99461	IXP Base Server	Oracle Communications Performance Intelligence Center, Mediation Server	Per Server
L99462	XDR builders	Oracle Communications Performance Intelligence Center, Mediation Protocol Content: any protocols not listed below	Megabits per Second
L100141	NA	Oracle Communications Performance Intelligence Center, Mediation Protocol II Content: Sigtran transport, E-ISUP, GTPv2c Mobility Management, RAN CC2, RAN EMM, RAN ESM, Diameter Gy, Diameter S9	Megabits per Second
L104779	NA	Oracle Communications Performance Intelligence Center, Mediation Protocol III Content: LTE Diameter (generic, all Diameter interfaces), LCS, AAA, Sv interface	Megabits per Second
L99466	NSP	Oracle Communications Performance Intelligence Center, Management – Simultaneous	Per Simultaneous User
L101850	NA	Oracle Communications Technology Foundation for Monitoring Applications	Per Server
L99467	ProTrace	Oracle Communications Performance Intelligence Center, Multiprotocol Troubleshooting	Per Simultaneous User
L99468	ProAlarm	Oracle Communications Performance Intelligence Center, Network and Service Alarm	Per Simultaneous User
L100213	ProPerf	Oracle Communications Performance Intelligence Center, Network and Service Dashboard NOTE: only up to OCPIC 10.1.x	Per Management Server
L104780	Properf	Oracle Communications Performance Intelligence Center, Dashboard NOTE : only from OCPIC 10.2+, replaces L100213 from 10.2	Per Management Server
L99470	ProDiag,	Oracle Communications Performance Intelligence Center,	Per Simultaneous

	ProDiag SIGTRAN	SS7 Network Surveillance	User
L101850	NA	Oracle Communications Technology Foundation for Monitoring Applications - per Server Perpetual	Per Server

5 APPENDIX B –ACRONYMS

This section defines the specific terms, acronyms, and abbreviations used in this document.

Table 7– List of acronyms

Acronym	Definition
A Interface	the GSM interface between a BSS and an MSC
AIN	advanced intelligent network
AMA	automatic message accounting
ANSI	American National Standards Institute
API	application programming interface
ARPU	Average Revenue Per User
ASCII	American standard code for information interchange
ASR	answer seizure ratio
ATM	asynchronous transfer mode
BCD	binary coded decimal
B-G Interfaces	all GSM interfaces that use the MAP protocol
BHC	base hardware configuration
BIB	backward indicator bit
BNS	billing number services
BSC	base station controller
BSN	backward sequence number
BSS	GSM base station subsystem
BSSMAP	GSM base station subsystem mobile application part
CDMA	code division multiple access
CDR	call detail record
CIC	ISUP circuit identification code
CIMD2	Computer Interface to Message Distribution 2, Nokia
CLLI	common language location identifier
CMISE	common management information service element
CORBA	common object request broker architecture
CPN	called party number
CR	an SCCP connection request message
CRC	cyclic redundancy check
CSFB	Circuit Switched Fallback
DCM	data communication module cards
DIR	direction, transmit or receive
DTAP	GSM direct transfer application part
ECM	enhanced communications module
EECM	Ethernet enhanced communications module

Acronym	Definition
EMI/UCP	External Machine Interface/Universal Computer Protocol,
EMM	Evolved Mobility Management
EMR	event message report
ERAB	Evolved Radio Access Bearer
ESM	Evolved Session Management
ESP	extended services platform
FIB	forward indicator bit
FIFO	First-in/First-Out
Filter	A set criteria for matching against all buffered messages which to display in a protocol analysis form
FISU	fill in signal unit
FSN	forward sequence number
FTP	file transfer protocol
GDMO	guidelines for the definition of managed objects
GMM	GPRS mobility management
GMSC	gateway mobile switching center
GPL	generic program load
GPRS	General Purpose Radio System
GSM	global system for mobile communications
GSM A	global system for mobile communications, A-interface
GSM MAP	global system for mobile communications, mobile application
GTP-C	GPRS tunneling protocol-control
GTT	global title translation
GUI	graphical user interface
HLR	GSM home location register
ICP	Integrated Correlation Platform
ICTM	inter-carrier TCAP monitoring
IMF	Integrated Message Feeder
IMSI	international mobile subscriber identity
IN	intelligent network
INAP	intelligent network application part
IP	Internet protocol
IPDR	IP Detail Record
IS41	interim standard 41, a signaling protocol used in the North American standard cellular system
IS634	interim standard 634, the interface between cellular base stations and mobile traffic switching offices
ISDN	integrated services digital network
ISP	Internet service provider
ISUP	ISDN user part
ITU	International Telecommunications Union

Acronym	Definition
KPI	Key Performance Indicator
KQI	Key Quality Indicator
LAN	local area network
LATA	local access transport area
LAP-B	link access procedure-balanced
LEC	local exchange carrier
LIC	link interface card – The LIC is a processor card of the i2000 hardware shelf. Every appliqué in the i2000 resides on an LIC. The term LIC may refer to any of the following PCBAs: the 8Mhz LIC, the 16Mhz LIC, or the 32Mhz 486 LIC or “ALICE”.
LIDB	Line information database
LIM	link interface modules
LNP	local number portability
LTE	Long Term Evolution
LUP	location update
M2PA	MTP2 user peer-to-peer adaptation layer
M3PA	MTP3 user peer-to-peer adaptation layer
M2UA	MTP2 User Adaptation Layer
M3UA	MTP3 User Adaptation Layer
MAP	GSM mobile application part
MBS	message buffer server
MGCP	media gateway control protocol
MIB	managed information base
MIT	managed information tree
MMC	mobile-to-mobile call
MO	managed object
MOC	mobile-originated call
MS	mobile station
MSC	mobile switching center
MSISDN	mobile-station ISDN number
MSU	message signal unit
MT	message type
MTC	mobile-terminated call
MTP	message transfer part – message transaction part that provides functions for basic routing of signaling messages between signaling points
NAS	Non Access Stratum
NEBS	network equipment building standards
NFS	network file system
NMS	network management system
NNM	HP OpenView Network Node Manager
NOC	network operations center
NOCC	network operation control center

Acronym	Definition
NPLT	network performance load test
NTP	network time protocol
NUP	network user part
OAM&P	operations administration maintenance and provisioning
OCS	Online Charging System
OCDSR	Oracle Communications Diameter Signalling Router
ODS	operational data store
OFCS	Offline Charging system
OPC	origination point code
OSI	open system interconnection
PA	Protocol Analysis
PCC	Policy & Charging Rule
PCI	peripheral component interconnect
PCM	Pulse Coded Modulation
PCS	personal communications service
PDF	Protocol Definition File
PDN	Packet Data Network
PDU	protocol data unit
PDR	Peg Count Data Record
PGW	PDN GateWay
PLMN	Public Land Mobile Network
<i>OCPI Probed Acquisition (PMF)</i>	Probed Message Feeder
PSTN	public switched telephone network
QoS	Quality of Service
RAM	random access memory
RMS	RackMount Server
ROI	return on investment
SAS	signaling application system
SCCP	signaling connection control part
SCP	service control point
SCP/AP	service control point/application part
SCSI	small computer system interface
SCTP	simple control transmission protocol
SDP	session description protocol
SDR	Session Detail Record
SGW	Service GateWay
SI	MTP service indicator
SIP	session initiation protocol
SLA	Service Level Agreement

Acronym	Definition
SLR	SCCP source local reference
SLTM/SLTA	signaling link test message/signaling link test acknowledge
SMPP	Short Message Peer to Peer
SMS	Short Message Service
SMS-C	Short Message Service Center
SNAP	signaling node application platform
SNMP	simple network management protocol
SP	signaling point
SQL	structured query language
SS7	Signaling system number 7 provides two key abilities: fast-call setup via high-speed circuit-switched connections and transactions capabilities that deal with remote data base interactions
SSN	SCCP subsystem number
SSP	service switching point
STC	Sentinel [®] transport card (Oracle)
STP	signal transfer point
SU	signaling unit
SUA	SCCP user adaptation layer
TAC	technical assistance center
TA	Tracking Area
TCAP	transaction capabilities application part
TCP	transmission control protocol
TCP/IP	transmission control protocol/Internet protocol
TDR	Transaction Detail Record
TID	TCAP transaction ID
TMN	telecommunications management network
TMSI	temporary mobile subscriber identity
TGN	trunk group number
TUP	telephone user part
UE	User Equipment
UDM	user defined message
VoIP	Voice over IP
VoLTE	Voice Over LTE
VLR	Visitor Location Register
VPN	Virtual Private Network
WAN	wide area network
WWW	World Wide Web
XDR	x Detail Record (Call, Transaction...)

6 APPENDIX C – LIST OF SUPPORTED PROTOCOLS

Table below presents the list of protocols handled by OCPIC system and pertaining standards.

All XDRs, with the exception of SIGTRAN CDRs which remain in IPv4 only, contains IPv6/IPv4 compatible addresses.

Table 8 - List of supported protocols and builders

Family	Protocol	Organization	Complete Reference	OCPIC 10.2 standards	Final builder
SS7	ISUP V1	ITU-T			see ISUP V3
SS7	ISUP V2	ITU-T			see ISUP V3
SS7	ISUP V3	ITU-T	Signalling system N°7 - ISDN user part formats and codes	Q.763 / Sept_97 (Q.761 to Q.764, Q.766 and Q.767)	SS7IsupEtsiCdr SS7IsupEtsiSudrAccounting Ss7IsupEtsiSuperCdr SS7UMSudr
SS7	BT NUP (UK)	National UK BT	BT Network Requirement	BTNR 167 Jul-87	SS7BttrupCdr
SS7	IUP	British Standard Institute	PNO-ISC Information Document Number 004 - Proprietary Extensions to C7 Interconnect User Part (IUP), Issue 2 PNO-ISC Specification Number 006 - Interconnect User Part (IUP)	PNO-ISC/INFO/004 Oct-99 PNO-ISC/SPEC/006 Jul-00	SS7IupCdr
SS7	ISUP ANSI Party Information Parameter (PIP)	ANSI	Signalling System N°7 (SS7) - Integrated Services Digital Network (ISDN) User Part Calling Party Name Convention Facility Specification	T1.113-1995 Jun-05 TICO076E Feb-98	SS7IsupAnsiCdr Ss7IsupAnsiSentinelCdr SS7UMSudr
SS7	TUP	ITU-T	Telephone User Part - Formats and codes Incompatible with SSUTR2 and BTNUP	Q.723 (Q.721 to Q.725) Nov-88	SS7TupCdr
SS7	TUP Chinese	National China	Technical specifications of SS7 for the national Telephone network of China	GF 001 - 9001	see TUP
SS7	TUP Brasilian variant				see TUP
SS7	ISUP Chinese		ETSI ISUP support with 24 bits OPC/DPC		see ISUP V3
SS7	ISUP Russian Variant (Sovintel)	National	CIS ISUP - Functional Description	CIS ISUP - Functional Description	see ISUP V3
SS7	ISUP Portuguese Variant (NOVIS)	National Portugal PT	ESPECIFICAÇÃO DE INTERFACE COM A REDE PÚBLICA INTERFACE DE COMUTADOR (2 Mbit/s) Sinalização Canal Comum SS#7 - Procedimento de taxaço em ISUP	Spécifications PT - Procedimento de taxaço em ISUP Apr-99	see ISUP V3
SS7	ISUP Brasilian Variant	TELEBRAS	#7 Common Channel Signaling System ISDN User part - ISUP, Issue 3	TB 220-250-732 Apr-98	see ISUP V3

Family	Protocol	Organization	Complete Reference	OCPIC 10.2 standards	Final builder
SS7	ISUP Colombian Variant	Ministerio des Comunicaciones	Norma Nacional de Señalización por Canal Comun N.º7 - SCC7	Norma Nacional <i>Apr-98</i>	see ISUP V3
SS7	ISUP Mexican Variant	Telmex	E-801.04 Sepcification - Integrated Services Degital Network user Part (ISUP), Edition "C-3"	E-801.04 <i>Dec-97</i>	see ISUP V3
SS7	ISUP Argentina variant	Telefonica Argentina	RDSI User Part Specification Signaling System N°7	General Specification AR.EG.s1.002 Ed 1 corrected	see ISUP V3
SS7	Cisco E-ISUP	Cisco	EISUP Specification - Cisco Systems	Cisco ENG-46168 Release 44	SS7_EISUP_CDR
		IETF	Reliable UDP Protocol	draft-ietf-sigtran-reliable-udp-00.txt <i>Feb-1999</i>	
SS7	LSSU	ITU-T	Signalling link	Q.703 <i>Jul-96</i>	
SS7	MTP ITU-T Level 2 & 3	ITU-T	Functional description of the Message Transfer Part (MTP) of Signalling System No. 7	Q.701 <i>Mar-93</i>	SS7L2L3EtsiSudr SS7Q752EtsiStats
			Signalling link	Q.703 / Q.704 <i>Jul-96</i>	
SS7	MTP ANSI Level 2 & 3	ANSI	Signalling System N°7 - Message Transfer Part (MTP)	T1.111-1996 <i>Mar-96</i>	SS7L2L3AnsiSudr
SS7	SCCP ITU-T	ITU-T	Signalling connection control part formats and codes	Q.713 <i>Jul-96</i>	Ss7SccpSuaSudr
SS7	SCCP ANSI	ANSI	Signalling System Number 7 - Signalling Connection Control Part (SCCP)	T1.112-1996 <i>Jan-96</i>	Ss7SccpSuaSudr
SS7	TCAP (MAP & INAP support)	ITU-T	Transaction capabilities formats and encoding	Q.773 <i>Jun-97</i>	
SS7	TCAP (IS-41 support)	ANSI	Signalling System Number 7 (SS7) - Transaction Capabilities Application Part (TCAP)	T1.114-1996 <i>Mar-96</i>	
		ANSI	Signalling System Number 7 (SS7) - Transaction Capabilities Application Part (TCAP)	T1.114-2000 <i>Jun-00</i>	
SS7	INAP Siemens	Specific: Siemens	Siemens Core INAP	P30308-A7128-A120-01-7659 <i>May-98</i>	SS7InapSudrAccounting SS7InapTdr SS7_INAP_Compact_TDR
SS7	INAP CS1	ETSI	Intelligent Network (IN); Intelligent Network Capability Set 1 (CS1); Core Intelligent Network Application Protocol (INAP);	ETS 300 374-1 <i>Sep-94</i>	SS7InapSudrAccounting SS7InapTdr SS7_INAP_Compact_TDR
		ITU-T	Introduction to intelligent network capability set 1	ITU-T Q.1211 <i>Mar-93</i>	
		ITU-T	Distributed functional plane for intelligent network CS-1	ITU-T Q.1214 <i>Oct-95</i>	
		ITU-T	Interface Recommendation for intelligent network CS-1	ITU-T Q.1218 <i>Oct-95</i>	

Family	Protocol	Organization	Complete Reference	OCPIC 10.2 standards	Final builder
SS7	INAP CS2	ITU-T	Intelligent Network (IN); Intelligent Network Application Protocol (INAP); Capability Set 2 (CS2)	ETS 301 140-1 <i>Jun-96</i>	SS7InapSudrAccounting SS7InapTdr SS7_INAP_Compact_TDR
SS7	INAP Ericsson CS1	Ericsson	ERICSSON SUPPORT OF ETSI CORE INAP CS1 Ericsson Support of ETSI Core INAP CS1	87/155-CRT 249 12 Uen <i>May-98</i>	SS7InapSudrAccounting SS7InapTdr SS7_INAP_Compact_TDR
SS7	INAP Ericsson CS1+	Ericsson	Ericsson INAP CS1+, Services assumed from TCAP, revision A Ericsson INAP CS1+, Abstract Synthax, revision B	4/155 17-CRT 249 09 Uen <i>Aug-96</i> 171/155 17-CRT 249 12 Uen <i>Jun-03</i>	SS7InapSudrAccounting SS7InapTdr SS7_INAP_Compact_TDR
SS7	INAP Ericsson V2 / V3 / V4	Ericsson	Ericsson's Protocol for Intelligent Networks, version 4, Formats and Codes	2/155 17-CRT 249 01 Uen D (V2) <i>Jan-96</i> 7/155 17-CRT 249 01 Uen B (V3) <i>Jan-97</i> 12/155 17-CRT 249 01 Uen A (V4) <i>Jan-98</i>	SS7InapSudrAccounting SS7InapTdr SS7_INAP_Compact_TDR
SS7	INAP Alcatel V3	Alcatel	INAP for E10 Version 3	ALCATEL E10 Version 3 <i>Sep-96</i>	SS7InapSudrAccounting SS7InapTdr SS7_INAP_Compact_TDR
SS7	INAP Alcatel V4	Alcatel	INAP for E10 Version 5	ALCATEL E10 Version 5 <i>Jan-99</i>	SS7InapSudrAccounting SS7InapTdr SS7_INAP_Compact_TDR
SS7	INAP Alcatel CS1	Alcatel	INAP Alcatel CS1	ALCATEL INAP CS1	SS7InapSudrAccounting SS7InapTdr SS7_INAP_Compact_TDR
SS7	CAMEL Phase 2	ETSI	Digital cellular telecommunications system (Phase 2+); Customised Applications for Mobile network Enhanced Logic (CAMEL); CAMEL Application Part (CAP) specification - GSM 09.78	TS 101 046 V7.0.0 (Release 98) <i>Aug-99</i>	SS7InapSudrAccounting SS7InapTdr SS7_INAP_Compact_TDR
SS7	CAMEL Phase 3	ETSI	Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Customised Applications for Mobile network Enhanced Logic (CAMEL); CAMEL Application Part (CAP) specification - GSM 29.78	TS 129 078 V5.9.0 (Release 5) <i>Sep-04</i>	SS7InapSudrAccounting SS7InapTdr SS7_INAP_Compact_TDR

Family	Protocol	Organization	Complete Reference	OCPIC 10.2 standards	Final builder
SS7	CAMEL Phase 4	ETSI	Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Customised Applications for Mobile network Enhanced Logic (CAMEL); CAMEL Application Part (CAP) specification - GSM 29.78	TS 129 078 V6.5.0 (Release 6) <i>Jun-06</i>	SS7InapSudrAccounting SS7InapTdr SS7_INAP_Compact_TDR
SS7	BSSAP (Phase 2+) BSSMAP	ETSI	Digital cellular telecommunications system (Phase 2+); Mobile-services Switching Centre – Base Station Systel (MSC – BSS) interface; Layer 3 specification - 3GPP TS 08.08	TS 48.008 V12.0.0 (Release 12) Sept-14	RanCC2Cdr RanMMTdr RanSMSTdr RanUSSD SS7BssapTdr
	DTAP		Digital cellular telecommunications system (Phase 2+); Mobile Radio Interface; Layer 3 specification - 3GPP TS 04.08	TS 24.008 V12.7.0 (Release 12) Sept-14	
	SMS		Digital cellular telecommunications system (Phase 2+); Point-to-Point (PP) Short message Service support on mobile radio interface - 3GPP TS 04.11	TS 24.011 V12.0.0 (Release 12) Sept-14	
	SMS SM-TP		Digital cellular telecommunications system (Phase 2+); Technical realization of the short Message Service (SMS) - 3GPP TS 03.40	TS 23.040 V12.2.0 (Release 12) Dec-14	
	Supplementary Services		Digital cellular telecommunications system (Phase 2+); Mobile Radio interface layer 3 supplementary service specification; Formats and Coding - 3GPP TS 04.80	TS 24.080 V12.0.0 (Release 12) Sept-14	
SS7	BSSAP+ (Gs Interface)	ETSI	Digital Cellular Telecommunications System (Phase 2+); Universal Mobile Telecommunications System (UMTS); general Packet radio Service (GPRS); Serving GPRS Support Node (SGSN) - Visitor Location register (VLR); Gs Interface layer 3 Specification - 3GPP TS 29.018	TS 29.018 V6.5.0 (Release 6) <i>Dec-06</i>	Ss7GsInterfaceTdr
SS7	GSM MAP	ETSI	Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Mobile Application Part (MAP) specification - 3GPP TS 29.002	TS 29.002 V12.6.0 (Release 12) Sept-14	Ss7HLRVtdr SS7MapTdr SS7MapSudrAccounting SS7MapSmTdr SS7MapMultiLegTdr SS7MapDB SS7Smdr SS7_MAP_Compact_TDR
SS7	IS-41 Révisions B, C, D & E (MAP)	ANSI	Cellular Radiotelecommunications Intersystem Operations	ANSI/TIA/EIA-41-D-1997 <i>Nov-97</i>	SS7IS41DB SS7IS41DE SS7IS41Tdr
	MEID	3GPP2	3G Mobile Equipment identifier (MEID) - Stage 1	3GPP2 S.R0048-A Ver 4.0 <i>Jun-05</i>	

Family	Protocol	Organization	Complete Reference	OCPIC 10.2 standards	Final builder
	IS-41-P IS-41-EE	Telecommunications Industry Association Lucent Ericsson	MEID Standards Update, version 1.8.4 ANSI -41 Protocol Extensions for Interfaces C and D (HLR - VLR/MSC) - Issue 2.0 IS-41 Intersystem Call delivery Signalling	TIA-MEID <i>Apr-06</i> IS-41-P <i>Nov-04</i> IS-41-EE <i>Jan-99</i>	
SS7	ISDN over IUA	ITU-T	ISDN user-network interface layer 3 specification for basic call control	Q.931 <i>May-98</i>	VoIP_Q_931_Cdr
SS7	AIN MTP ANSI Level 2 & 3 SCCP ANSI TCAP (IS-41 support) Services - CNAM - ATF - NS 800 - LNP - Flexible Number Routing	ANSI ANSI ANSI Telcordia Telcordia Telcordia Telcordia Telcordia Telcordia Telcordia	Signalling System N°7 - Message Transfer Part (MTP) Signalling System Number 7 - Signalling Connection Control Part (SCCP) Signalling System Number 7 (SS7) - Transaction Capabilities Application Part (TCAP) Telcordia Technologies Generic Requirements, GR-1188-CORE: Calling Name Delivery Generic Requirements, Issue 2 Telcordia Technologies Generic Requirements, GR-533-CORE: Database Services Service Switching Points - Toll-Free Service Generic Requirements, Issue 2 Telcordia Technologies Generic Requirements, GR-1299-CORE: Switch - Service Control Point (SCP) / Adjunct Interface Generic requirements, Issue 6 Telcordia Technologies Generic Requirements, GR-1519-CORE: CCS Network Interface Specification (CCSNIS) Supporting TR-NWT-001188 Calling Name Delivery Generic Requirements, Issue 1A Telcordia Technologies Generic Requirements, GR-2982-CORE: Local Number LNP Capability, Issue 1 Telcordia Technologies Generic Requirements, GR-246-CORE: Specification of Signaling System Number 7, Issue 5 Telcordia Technologies Generic Requirements, GR-2892-CORE: Switching and Signaling Generic Requirements for Toll-Free Service using AIN, Issue 1	T1.111-1996 <i>Mar-96</i> T1.112-1996 <i>Jan-96</i> T1.114-2000 <i>Jun-00</i> GR-1188-CORE <i>Dec-00</i> GR-533-CORE <i>Jun-01</i> GR-1299-CORE <i>Nov-00</i> GR-1519-CORE <i>Oct-94</i> GR-2982-CORE <i>Dec-97</i> GR-246-CORE <i>Dec-00</i> GR-2892-CORE <i>Apr-95</i>	SS7AinTdr

Family	Protocol	Organization	Complete Reference	OCPIC 10.2 standards	Final builder
SS7	LIDB	Telcordia	Telcordia Technologies Generic Requirements, GR-1158-CORE : OSSGR Section 22.3: Line Information Database, Issue 4 Telcordia Technologies Generic Requirements, GR-1149-CORE - OSSGR Section 10: System Interfaces, Issue 6	GR-1158-CORE <i>Dec-00</i> GR-1149-CORE <i>Sep-06</i>	SS7LidbTdr
SS7	CLASS	Telcordia	Telcordia Technologies Generic Requirements, GR-1188-CORE: Calling Name Delivery Generic Requirements, Issue 2 Telcordia Technologies Generic Requirements, GR-215-CORE: LSSGR: CLASS Feature: Automatic Callback (FSD 01-02-1250), Issue 2 Telcordia Technologies Generic Requirements, GR-220-CORE: LSSGR: CLASS Feature: Screening List Editing (FSD 30-28-0000), Issue 2 Telcordia Technologies Generic Requirements, GR-227-CORE: LSSGR: CLASS Feature: Automatic Recall (FSD 01-02-1260), Issue 2	GR-1188-CORE <i>Dec-00</i> GR-215-CORE <i>Apr-02</i> GR-220-CORE <i>Apr-02</i> GR-227-CORE <i>Apr-02</i>	SS7ClassTdr
SS7	WIN Services IS-771 IS-826 J-STD-036B IS-843 IS-801	Telcordia Telcordia Telcordia 3GPP2 3GPP2 3GPP2 Telcordia ANSI Telecommunications Industry Association Telecommunications Industry Association	Wireless Intelligent Network Wireless Intelligent Network - Addendum 1 Cellular Radiotelecommunications Intersystem Operations, Revision B to E Win Phase 1, Version 1.0 Win Phase 2, Version 1.0 ANSI -41-D Miscellaneous Enhancements, Version 1.0.0, Revision 0 Wireless Intelligent Network Capabilities for pre-paid Charging Enhanced Wireless SP-3-3890-RV2 9-1-1 Phase II Wireless Intelligent network Support for Location Based Services Position Determination Service for cdma2000 Spread Spectrum Systems	EIA/TIA IS-771 <i>Jul-99</i> EIA/TIA IS-771 <i>Aug-01</i> EIS/TIA IS-41 <i>Nov-97</i> 3GPP2 N.S0013-0 <i>Dec-98</i> 3GPP2 N.S0004-0 <i>Apr-01</i> 3GPP2 N.S0015 <i>Jan-00</i> TIA/EIA/IS-826 (1 to 7) <i>Aug-00</i> J-STD-036-B <i>Jan-08</i> TIA-843 <i>Aug-04</i> TIA-801-A <i>Apr-04</i>	SS7WinServiceTdr

Family	Protocol	Organization	Complete Reference	OCPIC 10.2 standards	Final builder
	IS-881	Telecommunications Industry Association	TIA/EIA-41-D Location Services Enhancements	TIA-881 <i>Mar-04</i>	
	IS-725	Nortel	TIA/EIA-41-D Enhancements for Over-The-Air Service Provisioning (OTASP) & Parameter Administration (OTAPA), Version 1	TIA/EIA/IS-725-A <i>Mar-99</i>	
	IS-764	Telecommunications Industry Association	TIA/EIA-41-D Enhancements for Wireless Calling Name - Feature Descriptions	TIA-764 <i>Jan-02</i>	
	IS-756	Telcordia	TIA/EIA-41-D Enhancements for Wireless Number Portability Phase II	TIA/EIA/IS-756-A <i>Dec-98</i>	
SS7	BICC ETSI	ITU-T	Bearer Independent Call Control protocol Signaling System N°7 - ISDN User Part	Q.1901 <i>Apr-02</i> Q.763 <i>Sep-97</i> (Q.761 to Q.764, Q.766 and Q.767)	Ss7BICCETsiCdr
SS7	BICC ANSI	ANSI	Specifications of the Bearer Independent Call Control	ANSI T1.BICC.1-2000 to ANSI T1.BICC.7-2000 <i>Jan-00</i>	Ss7BICCAnsiCdr
SS7	SIGTRAN		Support only for ISUP Family Planned for MAP, INAP and IS-41		IPSctpStats IPSctpSudr SS7M2paStats SS7M2PaSudr Ss7M2uaStats Ss7M2uaSudr SS7M3uaStats Ss7M3uaSudr Ss7SccpSuaSudr Ss7SuaStats SS7_SIGTRAN_Transport_SUDR
SS7	SCTP	IETF	Stream Control Transmission Protocol . Used as support for SIGTRAN	RFC 2960 <i>Oct-00</i>	
	M3UA		Signaling System 7 (SS7) Message Transfer Part 3 (MTP3) - User Adaptation Layer (M3UA). SUDR & Statistics	RFC 4666 <i>Sep-06</i>	
	M2UA		Signaling System 7 (SS7) Message Transfer Part 2 (MTP2) - User Adaptation Layer	RFC 3331 <i>Sep-02</i>	
	SUA		Signaling Connection Control Part User Adaptation Layer (SUA)	RFC 3868 <i>Oct-04</i>	
	M2PA		Signaling System 7 (SS7) Message Transfer Part 2 (MTP2) - User Peer-to-Peer Adaptation Layer (M2PA). SUDR & Statistics	RFC 4165 <i>Sep-05</i>	

Family	Protocol	Organization	Complete Reference	OCPIC 10.2 standards	Final builder
GPRS / IP	GPRS Gn & Gp	ETSI	Digital cellular telecommunications system (Phase 2+); General Packet Radio Service (GPRS); GPRS Tunneling Protocol (GTP) across the Gn and Gp Interface - 3GPP TS 09.60	TS 101 347 V7.8.0 (Release 98) Sep-01	GprsGnGpCdr GprsGnGpStats GprsGnGpTdr IP_Sessions_summary_TDR
			Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); General Packet Radio Service (GPRS); GPRS Tunneling Protocol (GTP) across the Gn and Gp Interface - 3GPP TS 09.60	TS 29.060 V12.6.0 (Release 12) Sept-14	
GPRS	GPRS Gb	ETSI			GprsGbTdr
	Network Service (NS)		Digital cellular telecommunications system (Phase 2+); General Packet Radio Service (GPRS); Base Station System (BSS) - Serving GPRS Support Node (SGSN) Interface; Network Service - 3GPP TS 48.016	TS 48.016 V7.4.0 (Release 7) Mar-08	
	BSS GPRS Protocol (BSSGP)		Digital cellular telecommunications system (Phase 2+); General Packet Radio Service (GPRS); Base Station System (BSS) - Serving GPRS Support Node (SGSN) Interface; BSS GPRS Protocol (BSSGP) - 3GPP TS 48.018	TS 48.018 V7.13.0 (Release 7) Dec-09	
	Logical Link Control (LLC)		Digital cellular telecommunications system (Phase 2+); General Packet Radio Service (GPRS); Mobile Station - Serving GPRS Support Node (MS - SGSN) Logical Link Control Layer (LLC) - 3GPP TS 04.64	TS 44.064 V7.3.0 (Release 7) Mar-08	
	GPRS Mobility Management (GMM) GPRS Session Management (GSM)		Digital cellular telecommunications system (Phase 2+)(GSM); Mobile Radio Interface; Layer 3 Specification - 3GPP TS 04.08	TS 24.008 V7.12.0 (Release 7) Jun-08	
	SNDP	ETSI	Digital cellular telecommunications system (Phase 2+); General Packet Radio Service (GPRS); Mobile Station - Serving GPRS Support Node (MS - SGSN); Subnetwork Dependent Convergence Protocol (SNDP) - 3GPP TS 04.65	TS 24.065 V7.0.0 (Release 7) Dec-06	

Family	Protocol	Organization	Complete Reference	OCPIC 10.2 standards	Final builder
	Short Message Service (SMS)	ETSI	Digital cellular telecommunications system (Phase 2+); Point-to-Point (PP) Short Message service (SMS) Support on Mobile Rtdio Interface - 3GPP TS 04.11 Digital cellular telecommunications system (Phase 2+); Technical realization of Short Message Service (SMS) Point-to-Point (PP) - 3GPP TS 03.40	TS 24.011 V7.1.0 (Release 7) Jun-09 TS 23.040 V7.2.0 (Release 7) Mar-09	
GPRS	GPRS Gr & Gd	ETSI	Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Mobile Application Part (MAP) specification - 3GPP TS 29.002	TS 29.002 V12.6.0 (Release 12) Sept-14	SS7MapTdr SS7_MAP_Compact_TDR
IP	DNS	IETF	Domain Names - Concepts and Facilities Domain Names - Implementation and Specification	RFC 1034 Nov-87 Not relevant or supported: RFC1101, RFC1183, RFC1348, RFC1876, RFC1982, RFC2065, RFC2181, RFC2308, RFC2535, RFC4033, RFC4034, RFC4035, RFC4343, RFC4035, RFC4592, RFC5936 RFC 1035 Nov-87 Not relevant or supported: RFC1101, RFC1183, RFC1348, RFC1876, RFC1982, RFC1995, RFC1996, RFC2065, RFC2136, RFC2181, RFC2137, RFC2308, RFC2535, RFC2845, RFC3425, RFC3658, RFC4033, RFC4034, RFC4035, RFC4343, RFC5936, RFC5966	IpDnsTdr
IP	DNS ENUM	IETF	E.164 Number and DNS	RFC 2916 Sep-00	IpDnsEnumTdr
IP	RADIUS	IETF	Remote Authentication Dial In User Service (RADIUS)	RFC 2865 Jun-00 RFC2866 Jun-00 Not relevant or supported: RFC2868, RFC3575, RFC5080	IpRadius
IP	DHCP				IpDhcpTdr

Family	Protocol	Organization	Complete Reference	OCPIC 10.2 standards	Final builder
	BOOTP	IETF	Bootstrap protocol (BOOTP)	RFC 951 <i>Sep-85</i> Not relevant or supported: RFC1395, RFC1497, RFC1532, RFC1542, RFC5494	
	DHCP	IETF	Dynamic Host Configuration Protocol	RFC 2131 <i>May-97</i> Not relevant or supported: RFC3396, RFC4361, RFC5494	
IP	WAP WTP WSP	WAP Forum / OMA WAP Forum / OMA	Wireless Transaction protocol WAP - Wireless Session Protocol Specification	WAP-224-WTP-20010710-a <i>Jul-01</i> WAP-230-WSP-20010705-p <i>Jul-01</i>	IpWapv1Tdr
IP	MMS	OMA	Multimedia Messaging Service Encapsulation Protocol Version 1.1	OMA-MMS-ENC-v1_1- 20021030-C <i>Oct-02</i>	IpMmsWapv1Tdr IpMmsWapv2Tdr
IP	HTTP	IETF	Hypertext Transfer Protocol - HTTP/1.1	RFC 2616 <i>Jun-99</i> Not relevant or supported: RFC2817, RFC5785, RFC6266	IpHttpTdr
IP	WAP2	IETF WAP Forum / OMA	Hypertext Transfer Protocol - HTTP/1.1 WAP Architecture	RFC 2616 <i>Jun-99</i> Not relevant or supported: RFC2817, RFC5785, RFC6266 WAP-210-WAPArch- 20010712 <i>Jul-01</i>	IpWapv2Tdr
IP	POP3	IETF	Post Office protocol - Version 3	RFC 1460 <i>Jun-93</i>	IpPop3Tdr
IP	SMTP	IETF	Simple Mail Transfer Protocol	RFC 2821 <i>Apr-01</i>	IpSmtptdr
IP	IMAP4	IETF	Internet Message Access Protocol - Version 4rev1	RFC 2060 <i>Mar-03</i>	IpImap4Tdr
IP	FTP	IETF	File Transfer Protocol	RFC 959 <i>Oct-85</i> Not relevant or supported: RFC2228, RFC2640, RFC2773, RFC3659, RFC5797	IpFtpTdr
IP	TCP	IETF	Transmission Control Protocol	RFC 793 <i>Sep-81</i> Not relevant or supported: RFC1122, RFC3168, RFC6093	IpTcpCdr
IP	RTSP	IETF	Real Time Streaming Protocol (RTSP)	RFC 2326 <i>Apr-98</i>	IpRtspTdr
		IETF	SDP:Session Description Protocol	RFC 2327 <i>Apr-98</i>	

Family	Protocol	Organization	Complete Reference	OCPIC 10.2 standards	Final builder
IP	SMPP	SMS Forum	Short Message Peer-to-Peer protocol Specification, Version 5.0	SMPP v5.0 <i>Feb-03</i>	IpSmpTdr
IP	UCP	Logica CMG	Short Message Service center; EMI - UCP Interface 4.6	EMI UCP Interface <i>May-05</i>	IpUcpTdr
UMTS	UMTS	ETSI	Universal Mobile Telecommunications System (UMTS); UTRAN Iu interface Radio Access Network Application Part (RANAP) signalling - 3GPP TS 25.413	TS 25.413 V12.3.0 (Release 12) Dec-14	Ran_CC2_Cdr Ran_MM_Tdr Ran_SMS_Tdr Ran_USSD UMTS_Iu_C_TDR UMTS_Iu_P_GMM_TDR R UMTS_Iu_P_TDR UMTS_Iu_P_SM_TDR
	Iu-CS Control Plane over IP Iu-PS Control Plane over IP		Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Mobile radio interface layer 3 specification; Radio Resource Control (RRC) protocol - 3GPP TS 44.018	TS 44.018 V12.3.0 (Release 12) Sept-14	
			Digital cellular telecommunications system (Phase 2+); Mobile Radio interface layer 3 supplementary service specification; Formats and Coding - 3GPP TS 04.80	TS 24.080 V12.0.0 (Release 12) Sept-14	
			Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Technical realization of Short Message Service (SMS) Point-to-Point (PP) - 3GPP TS 24.011	TS 24.011 V12.0.0 (Release 12) Sept-14	
			Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Mobile radio interface Layer 3 specification; Core network protocols; Stage 3 - 3GPP TS 24.008	TS 24.008 V12.7.0 (Release 12) Sept-14	
	Iu-PS User Plane over IP		Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); General Packet Radio Service (GPRS);GPRS Tunneling Protocol (GTP) across the Gn and Gp Interface - 3GPP TS 09.60	TS 29.060 V12.6.0 (Release 12) Sept-14	

Family	Protocol	Organization	Complete Reference	OCPIC 10.2 standards	Final builder
VoIP	VoIP SIP / SIP-T / SIP-I	IETF	SIP Session Initiation Protocol	RFC 3261 <i>Jun-02</i> Not relevant or supported: RFC3853, RFC4320, RFC4916, RFC5393, RFC5621, RFC5626, RFC5630, RFC5922, RFC5954, RFC6026, RFC6141	VoipSipCdr VoipSiptAnsiCdr VoipSiptltuCdr
		IETF	Reliability of Provisional Responses in the Session Initiation Protocol (SIP)	RFC 3262 <i>Jun-02</i>	
		IETF	Session Initiation Protocol (SIP) - Specific Event Notification	RFC 3265 <i>Jun-02</i> Not relevant or supported: RFC5367, RFC5727, RFC6446	
		IETF	The Session Initiation Protocol (SIP) UPDATE Method	RFC 3311 <i>Sep-02</i>	
		IETF	The Session Initiation Protocol (SIP) Refer Method	RFC 3515 <i>Apr-03</i>	
		IETF	The SIP INFO Method	RFC 2976 <i>Oct-00</i>	
		IETF	Session Initiation Protocol for Telephones (SIP-T): Context and Architectures	RFC 3372 <i>Sep-02</i>	
		IETF	SDP:Session Description Protocol	RFC 2327 <i>Apr-98</i>	
		IETF	Session Description Protocol (SDP) Simple Capability Declaration	RFC 3407	
		ITU-T	Interworking between Session Initiation Protocol (SIP) and Bearer Independant Call Control Protocol or ISDN User Part.	Q.1912-5 <i>Mar-04</i>	
Nortel	CS2000 SIP/SIP-T Interoperability Specification (Issue 0.82) System Requirement Document	Nortel CS2000 <i>01/10/2003</i>			
			Multiple Dialog Usages in the Session Initiation Protocol	<i>RFC5057</i>	
VoIP	VoIP H.225/Q.931	ITU-T	Serie H: Audiovisual and Multimedia Systems - Call Signalling protocols and media stream packetisation for packet-based multimedia communication systems	H.225.0 <i>Jul-03</i>	VoipQ931Cdr
		ITU-T	ISDN user-network interface layer 3 specification for basic call control	Q.931 <i>Dec-99</i>	
VoIP	VoIP H.225/RAS	ITU-T	Call Signalling protocols and media stream packetisation for packet-based multimedia communication systems	H.225.1 <i>Jul-03</i>	VoipRasTdr
VoIP	VoIP H.245	ITU-T	Control Protocol for multimrdia communication	H.245 <i>Jul-03</i>	VoipH245Tdr

Family	Protocol	Organization	Complete Reference	OCPIC 10.2 standards	Final builder
VoIP	VoIP RTCP	IETF	RTP: A Transport Protocol for Real-Time Application	RFC 3550, <i>Jul-03</i> RFC3551 <i>Jul-03</i> Not relevant or supported: RFC5506, RFC5761, RFC6051, RFC6222	VoipRtcpStats
VoIP	MGCP	IETF	Media Gateway Control Protocol (MGCP) version 1.0	RFC 3435 <i>Jan-03</i> Not relevant or supported: RFC3661	VoipMgcpCdr VoipMgcpTdr
		IETF	Media Gateway Control Protocol (MGCP) Return Code Usage	RFC 3661 <i>Dec-03</i>	
		IETF	Media Gateway Control Protocol (MGCP) Packages	RFC 3660 <i>Dec-03</i>	
VoIP	MEGACO	IETF	Gateway Control Protocol Version 1.0	RFC 3525 <i>Jun-03</i>	VoipMEGACOTdr
VoIP	H.248	ITU-T	Gateway Control Protocol: Version 2	H.248.1 <i>May-02</i> Supported packages H.248.2 until H.248.31	VoipH248Tdr
IMS	Diameter	IETF	Diameter Base Protocol	RFC 3588 <i>Sep-03</i>	ImDiameterCcTdr ImDiameterCxTdr ImDiameterGqTdr ImDiameterShTdr ImDiameterTdr LTE_Diameter-TDR
	Diameter Credit-Control (Cc, Ro, Rf, Gy, Ga)	IETF	Diameter Credit-Control Application	RFC 4006 <i>Aug-05</i>	
		ETSI / 3GPP	3rd Generation Partnership Project; Technical Specification Group Service and System Aspects; Telecommunication management; Charging management;	TS 32.299 V12.6.0 (Release 12) Sept-14	
	Diameter Gq	ETSI	Diameter charging applications Universal Mobile Telecommunications System (UMTS); Policy control over Gq interface (3GPP TS 29.209 version 6.5.0 Release 6) . Replaced by Rx in LTE	TS 29.209 V6.5.0 (Release 6) <i>Jun-06</i>	

Family	Protocol	Organization	Complete Reference	OCPIC 10.2 standards	Final builder
	Diameter Cx/Dx	ETSI	Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); IP Multimedia (IM) Subsystem Cx and Dx Interfaces; Signalling flows and message contents 3GPP TS 29.228	TS 29.228 V12.3.0 (Release 12) Sept-14	
		ETSI	Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Cx and Dx interfaces based on the Diameter protocol 3GPP TS 29.229	TS 29.229 V12.3.0 (Release 12) Sept-14	
		ETSI	Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Diameter applications; 3GPP specific codes and identifiers 3GPP TS 29.230	TS 29.230 V12.6.0 (Release 12) Sept-14	
	Diameter Sh	ETSI	Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); Sh interface based on the Diameter protocol; 3GPP TS 29.329	TS 29.329 V12.4.0 (Release 12) Sept-14	
LTE	Diameter S6	3GPP	3rd Generation Partnership Project; Technical Specification Group Core Network and Terminals; Evolved Packet System (EPS); Mobility Management Entity (MME) and Serving GPRS Support Node (SGSN) related interfaces based on Diameter protocol (Release 9)	TS 29.272 V12.6.0 (Release 12) Sept-14	LTE_Diameter_S6_TDR LTE_Diameter_SUDR_Accounting LTE_Diameter-TDR
	Diameter Gx/S7	3GPP	3rd Generation Partnership Project; Technical Specification Group Core Network and Terminals; Policy and Charging Control over Gx reference point (Release 9)	TS 29.212 V12.6.0 (Release 12) Sept-14	LTE_Diameter_Gx_TDR LTE_Diameter-TDR
	Diameter Rx	3GPP	3rd Generation Partnership Project; Technical Specification Group Core Network and Terminals; Policy and Charging Control over Rx reference point (Release 9)	TS 29.214 V12.5.0 (Release 12) Sept-14	LTE_Diameter_Rx_TDR LTE_Diameter-TDR
	Diameter Gy	3GPP	3rd Generation Partnership Project; Technical Specification Group Services and System Aspects; Telecommunication management; Charging management; Diameter charging applications	TS 32.299 V12.6.0 (Release 12) Sept-14	LTE_DIAMETER_Gy_TDR LTE_Diameter-TDR

Family	Protocol	Organization	Complete Reference	OCPIK 10.2 standards	Final builder
	Diameter S9	3GPP	3rd Generation Partnership Project; Technical Specification Group Core Network and Terminals; Policy and Charging Control (PCC) over S9 reference point; Stage 3	TS 29.215 V12.5.0 (Release 12) Sept-14	LTE_DIAMETER_S9_TDR LTE_Diameter-TDR
	Diameter AAA	3GPP	3rd Generation Partnership Project; Technical Specification Group Core Network and Terminals; Evolved Packet System (EPS); 3GPP EPS AAA interfaces	TS 29.273 V12.5.0 (Release 12) Sept-14	LTE_Diameter_AAA_TDR
	Diameter LCS	3GPP	3rd Generation Partnership Project; Technical Specification Group Core Network and Terminals; Location Services (LCS); Evolved Packet Core (EPC) LCS Protocol (ELP) between the Gateway Mobile Location Centre (GMLC) and the Mobile Management Entity (MME); SLg interface	TS 29.172 V12.4.0 (Release 12) Mar-14	LTE_Diameter_LCS_TDR
			3rd Generation Partnership Project; Technical Specification Group Core Network and Terminals; Location Services (LCS); Diameter-based SLh interface for Control Plane LCS	TS 29.173 V12.2.0 (Release 12) Sept-14	
	GTPv2	3GPP	3rd Generation Partnership Project; Technical Specification Group Core Network and Terminals; 3GPP Evolved Packet System (EPS); Evolved General Packet Radio Service (GPRS) Tunneling Protocol for Control plane (GTPv2-C); Stage 3 (Release 9)	TS 29.274 V12.6.0 (Release 12) Sept-14	LTE_GTP_v2_Tunnel_Management_TDR LTE_GTP_v2_Mobility_Management_TDR LTE_GTP_v2_Sv_TDR
	S1-AP	3GPP	3rd Generation Partnership Project; Technical Specification Group Radio Access Network; Evolved Universal Terrestrial Radio Access Network (E-UTRAN); S1 Application Protocol (S1AP) (Release 9)	TS 36.413 V12.3.0 (Release 12) Sept-14	LTE_S1AP_TDR RAN_ESM_TDR RAN_EMM_TDR

Family	Protocol	Organization	Complete Reference	OCPIC 10.2 standards	Final builder
	SGs	3GPP	3rd Generation Partnership Project; Technical Specification Group Core Network and Terminals; Non-Access-Stratum (NAS) protocol for Evolved Packet System (EPS); Stage 3 (Release 9)	TS 24.301 V12.6.0 (Release 12) (Release 12)Sept-14	LTE_SGsAP_TDR
		3GPP	3rd Generation Partnership Project; Technical Specification Group Core Network and Terminals; Mobility Management Entity (MME) – Visitor Location Register (VLR) SGs interface specification (Release 9)	TS 29.118 V12.6.0 (Release 12) Sept-14	
	LTE User Plane (S5-U, S8-U, S1-U, S12-U)	3GPP	3rd Generation Partnership Project; Technical Specification Group Core Network and Terminals; General Packet Radio System (GPRS) Tunnelling Protocol User Plane (GTPv1-U) (Release 9)	TS 29.281 V11.6.0 (Release 11) Mar-13	LTE_GTP_User_Plane_Capture



Oracle Corporation
World Headquarters
500 Oracle Parkway
Redwood Shores, CA 94065
U.S.A.

Worldwide Inquiries:
Phone: +1.650.506.7000
Fax: +1.650.506.7200

oracle.com



Copyright © 2016, Oracle and/or its affiliates. All rights reserved.

This document is provided for information purposes only, and the contents hereof are subject to change without notice. This document is not warranted to be error-free, nor subject to any other warranties or conditions, whether expressed orally or implied in law, including implied warranties and conditions of merchantability or fitness for a particular purpose. We specifically disclaim any liability with respect to this document, and no contractual obligations are formed either directly or indirectly by this document. This document may not be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without our prior written permission.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group. 0113

Hardware and Software, Engineered to Work Together

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS PROPRIETARY AND IS NOT TO BE REPRODUCED, USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE WRITTEN PERMISSION OF ORACLE	COPYRIGHT, © ORACLE 2016	Revision: 1.0	Page 92 of 92
--	-----------------------------	---------------	---------------