

**Oracle® Communications  
Performance Intelligence Center  
Centralized Configuration Manager Administrator's Guide  
Release 10.1.5  
E56977 Revision 1**

August 2015

Copyright © 2003, 2015, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notices are applicable:

**U.S. GOVERNMENT END USERS:** Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to thirdparty content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Refer to Appendix I for instructions on accessing My Oracle Support.

## Table of Contents

<b>List of Figures.....</b>	<b>vii</b>
<b>List of Tables .....</b>	<b>xiii</b>
<b>Chapter 1: About This Help Text .....</b>	<b>1</b>
Overview .....	1
Scope and Audience.....	1
About the Performance Intelligence Center .....	1
PIC Documentation Library.....	2
Common instructions .....	3
<b>Chapter 2: Key Concepts.....</b>	<b>4</b>
About PIC.....	4
CCM Overview .....	4
About Data Acquisition and Processing .....	4
IMF Data Acquisition.....	5
PMF E1/T1 Data Acquisition .....	5
PMF IP Data Acquisition.....	6
PIC NTP Sources for Accurate Time Stamping.....	6
Overall PIC Configuration .....	7
Monitored Network Elements.....	7
About PDU Collection .....	8
PDU Routing and Filtering .....	9
About xDR Generation .....	11
KPI Generation .....	11
About xDR Data Feeds .....	12
About Network Views.....	12
About Security and Permissions .....	12
About Equipment Registry .....	12
About Report Configuration.....	13
<b>Chapter 3: Using CCM.....</b>	<b>14</b>
About CCM .....	14

Opening CCM.....	15
Understanding the CCM Screen.....	16
<b>Chapter 4: Home Screen Operations .....</b>	<b>18</b>
About CCM Home Page Operations .....	18
Network Elements.....	18
Network View Lists .....	21
xDR-Related Elements .....	21
Bulk Load.....	23
Bulk Loading Process.....	23
Exporting Bulk Load Configurations .....	40
Creating a Configuration Report.....	41
Configure alarm severity offset.....	42
Managing Third Party (External) Applications .....	43
Auto Synch Parameters .....	45
xMF Synchronization Reports .....	45
<b>Chapter 5: Equipment Registry .....</b>	<b>46</b>
About Equipment Registry .....	46
Sites.....	46
About Subsystems.....	51
<b>Chapter 6: Network Element Configuration.....</b>	<b>66</b>
About Network Elements.....	66
Filtering Network Elements.....	66
About Nodes .....	67
About Non-node Network Elements.....	68
<b>Chapter 7: Network View Configuration .....</b>	<b>85</b>
About Network Views.....	85
About Link-based Network Views .....	88
<b>Chapter 8: xMF Acquisition .....</b>	<b>95</b>
About the Acquisition Perspective .....	95
About xMF Subsystem Management .....	95
About PDU Filters .....	116

About PDU Dataflows .....	162
About Alarms.....	174
About Resource ID Groups (RID) .....	178
About Q.752 Counters .....	179
About PMF Sigtran configuration use case .....	181
<b>Chapter 9: IXP Mediation .....</b>	<b>184</b>
About Mediation Perspective .....	184
About Managing each IXP Subsystem .....	184
About IXP Storage Servers .....	189
Configuring Servers in an IXP Subsystem.....	191
Adding an External PDU Stream .....	194
Configuring xDR Dataflow Processings .....	199
About Distributions .....	244
Managing Multiple IXP Subsystems .....	247
About Q.752 Filters.....	247
About Dictionaries .....	251
About xDR Filters.....	256
About Sessions.....	259
About Enrichment Files.....	265
<b>Chapter 10: Monitoring Policies.....</b>	<b>268</b>
About 3G Monitoring Policies .....	268
About Filtering Monitoring Policies .....	270
<b>Appendix A: Configuration Workflows .....</b>	<b>271</b>
Provisioning Guide for Configuring a PIC System .....	271
Setting up PIC Sites .....	271
SS7 Data Acquisition Using IMF .....	272
SS7 Data Acquisition Using PMF .....	272
GPRS Network Data Acquisition Using PMF .....	272
IP Network Data Acquisition for PMF .....	272
Configuring for 3G Intelligent Data Monitoring (IDM).....	273
Routing PDUs to xDR Builders .....	273

Associating Sessions for Link-based Network Views .....	274
Configuring Q.752 Processing .....	275
Alarm Configuration.....	275
Duplicate IP Packet Suppression Configuration.....	275
<b>Appendix B: xDR Builder Parameters.....</b>	<b>278</b>
List of Parameters for Each xDR Builder .....	278
Initial Parameters.....	278
IP Transport Screen.....	278
SS7 SCCP Parameters.....	279
SS7 SUA Parameters .....	281
SS7 Transport Parameters .....	281
<b>Appendix C: About STC Copy and Fast Copy Effects on Monitoring Groups and Dataflows .....</b>	<b>283</b>
Considerations When Working with STC/Fastcopy .....	283
About STC Copy to Fast Copy Interactions.....	284
Inter-monitoring Groups Link Transfer (M3UA) .....	285
About Fast Copy to STC Copy Interactions.....	289
About Moving Fast Copy from M3UA to M2PA.....	291
<b>Appendix D: Defining and Modifying Flavor (PC Format) of Session at CCM .....</b>	<b>295</b>
Define Flavor (PC Format) of Session.....	295
Modifying flavor of a xDR Session .....	296
<b>Appendix E: xDR Filters during Protocol Upgrade .....</b>	<b>297</b>
<b>Appendix F: FSE enrichment file syntax .....</b>	<b>298</b>
<b>Appendix G: PMIA filter syntax .....</b>	<b>299</b>
<b>Appendix H: CSV streaming feed.....</b>	<b>302</b>
<b>Appendix I: My Oracle Support (MOS).....</b>	<b>303</b>
<b>Appendix J: Locate Product Documentation on the Oracle Technology Network Site .</b>	<b>304</b>

## List of Figures

Figure 1: PIC Overview .....	2
Figure 2: Imf Acquisition Sequence .....	5
Figure 3: Pmf E1/T1 Data Acquisition Sequence .....	5
Figure 4: Pmf IP Data Acquisition Sequence .....	6
Figure 5: PIC NTP Example .....	6
Figure 6: PIC System.....	7
Figure 7: CCM Home Screen .....	15
Figure 8: SS7 Node(s) List Screen.....	19
Figure 9: SS7 Signaling Points List Screen .....	19
Figure 10: Selected SS7 Linkset List Showing Associated Links.....	20
Figure 11: SS7 Links List Screen .....	20
Figure 12: Gprs Signaling Point List Screen .....	20
Figure 13: Gprs Gb Link List Screen.....	20
Figure 14: IP Signaling Point List Screen .....	21
Figure 15: Network Sessions View(s) List Screen .....	21
Figure 16: Link Network View(s) List Screen.....	21
Figure 17: xDR Sessions List Screen.....	22
Figure 18: Dictionaries Present Screen .....	22
Figure 19: Bulk Load Import Screen .....	28
Figure 20: Bulk Load Import Screen .....	34
Figure 21: Browse Screen .....	37
Figure 22: Browse Screen .....	39
Figure 23: Browse Screen .....	40
Figure 24: Bulk Export Configurations Prompt .....	41
Figure 25: Bulk Export Configurations Prompt .....	41
Figure 26: Open/Save Prompt For Configuration Report.....	42
Figure 27: Sample Report .....	42
Figure 28: Alarms Severity offset Screen .....	43
Figure 29: Thirdparty List Screen.....	43
Figure 30: Thirdparty List Screen.....	44
Figure 31: Thirdparty Application Add Screen .....	44
Figure 32: Site List Screen.....	47
Figure 33: Site Add Screen .....	47
Figure 34: New Site With Subsystems.....	48
Figure 35: Site Modify Screen .....	48
Figure 36: Subsystem Results Summary Screen.....	54
Figure 37: Results Summary Screen With Error Symbol .....	54
Figure 38: Object Tree Showing Added Subsystem With Results Screen .....	55
Figure 39: IXP Subsystem List Screen.....	55
Figure 40: IXP Subsystem List Screen.....	56
Figure 41: Add IXP Subsystem Screen .....	57
Figure 42: Subsystem Results Screen.....	58
Figure 43: Results Screen With Error Symbol .....	58
Figure 44: Object Tree Showing Added Subsystem With Results Screen .....	59
Figure 45: Verification Screen - Done Button Not Shown .....	60
Figure 46: Results Summary Screen - Host Tab .....	61
Figure 47: Results Summary Screen - Application Tab.....	61

Figure 48: Results Summary Screen - Network Element Discovery .....	61
Figure 49: PMF Results Summary Screen .....	63
Figure 50: Discovery Summary Screen - Hosts Tab .....	63
Figure 51: Discovery Summary Screen - Application Tab.....	63
Figure 52: Discovery Summary Screen - PMF Card Discovery .....	64
Figure 53: Neptune probe registration .....	65
Figure 54: Selected Linkset with Corresponding Links .....	66
Figure 55: Network Element Filter Screen (Linkset shown).....	67
Figure 56: Filter Screen Filled .....	67
Figure 57: Node Add Screen.....	68
Figure 58: Add Linkset Screen.....	70
Figure 59: Associating A Linkset To Signaling Points .....	70
Figure 60: Linkset Additional Information.....	71
Figure 61: Linkset List With New Linkset Added .....	71
Figure 62: Custom Name Override Function Popup .....	72
Figure 63: Add Screen.....	73
Figure 64: View Type Selection Screen.....	74
Figure 65: View Type Selection Screen.....	74
Figure 66: Add Signaling Point Screen.....	75
Figure 67: SS7 Signaling Point Add Screen.....	75
Figure 68: Add Gb Link Screen .....	76
Figure 69: Nodes and Signaling Points List Screen .....	78
Figure 70: GPRS Signaling Points Add Screen.....	78
Figure 71: Add Signaling Point Screen.....	79
Figure 72: Network View Perspective .....	85
Figure 73: Initial Setup Screen.....	86
Figure 74: View Type Selection Screen.....	86
Figure 75: Network View List Screen .....	87
Figure 76: View Type Selection Screen.....	87
Figure 77: Network View Perspective .....	88
Figure 78: Link Network View Create Info-Initial Setup.....	89
Figure 79: View Type Selection Screen.....	89
Figure 80: SS7 Linkset Selector Filter Screen .....	90
Figure 81: Sites Screen .....	91
Figure 82: SS7 Node Screen.....	91
Figure 83: SS7 Linkset Name Screen.....	92
Figure 84: View Type Selection Screen.....	92
Figure 85: View Type Classification Screen.....	93
Figure 86: Link Selector Screen.....	94
Figure 87: Acquisition Perspective Overview .....	95
Figure 88: xMF Subsystem Pop-Up Menu .....	95
Figure 89: Selected XMF Subsystem .....	96
Figure 90: Synchronization Results Screen .....	96
Figure 91: Apply Changes Screen .....	97
Figure 92: xMF Subsystem Settings List Screen .....	100
Figure 93: xMF Subsystem Parameter Add Screen.....	100
Figure 94: xMF Stream Threshold List Screen.....	101
Figure 95: Stream Threshold List Screen.....	103
Figure 96: Stream Threshold Parameters Screen .....	103

Figure 97: Add Card Screen.....	104
Figure 98: Span Card Screen with Unconfigured Ports .....	104
Figure 99: Span Card Configure Screen with Channel Link Mapping Section .....	105
Figure 100: Span Card Configure Screen with Channel Link Mapping Add Screen.....	105
Figure 101: Span Card Configure Screen with Channel Link Mapping Add Screen.....	105
Figure 102: PMIA Screen .....	114
Figure 103: DTS List Screen .....	115
Figure 104: DTS Add Screen.....	115
Figure 105: Add SSN Filter Screen.....	117
Figure 106: Global Title (GT) Filter .....	119
Figure 107: Point Code Filter Create/Modify Information Screen.....	120
Figure 108: Add PC Filter Screen .....	121
Figure 109: Add Raw Filter Screen .....	132
Figure 110: Add Combination Filter Screen .....	133
Figure 111: Add Gb DLCI Filter Screen .....	134
Figure 112: Gb DLCI Filter Screen .....	135
Figure 113: Add IP Address Filter Screen.....	139
Figure 114: IP Filters Screen.....	140
Figure 115: IP Port Filter Screen With GTP Port Filter Default.....	141
Figure 116: Add Port Filter Screen.....	142
Figure 117: Add IP VLAN Filter Screen.....	143
Figure 118: Add SAPI for Gb over IP Filter Screen.....	145
Figure 119: IP Raw Filters Screen.....	146
Figure 120: Combination Filters Screen.....	147
Figure 121: SigTran OtherProt Assoc Filter Screen.....	150
Figure 122: Sigtran Data Chunk Payload Protocol Identifier Filters Screen .....	160
Figure 123: Sigtran Raw Filters Screen .....	161
Figure 124: Combination Filters Screen.....	161
Figure 125: SS7 Dataflow List Screen.....	164
Figure 126: Direction, Service Indicator, Filter & Truncation Details Screen.....	164
Figure 127: Monitored Linkset Details Screen.....	165
Figure 128: SS7 Linkset Selector Filter Screen .....	165
Figure 129: Dataflows And Stream Routes-New Routes .....	166
Figure 130: Dataflows And Stream Routes-Streams Screen .....	166
Figure 131: Dataflows and Routes Screen.....	166
Figure 132: IP Dataflow List Screen .....	168
Figure 133: IP Data Flow Add Screen.....	169
Figure 134: Traffic Classifications Screen.....	170
Figure 135: Traffic Classifications Selector Screen .....	170
Figure 136: IP Dataflow List Screen .....	171
Figure 137: IP Data Flow Add Screen.....	171
Figure 138: IP Dataflow Associations Selector Screen .....	171
Figure 139: Add Q.752 Dataflow Screen .....	172
Figure 140: Network View Details Of Q.752 Record Screen .....	173
Figure 141: Dataflow Summary Screen .....	173
Figure 142: Dataflows And Stream Routes-Streams Screen .....	173
Figure 143: Dataflows And Stream Routes Streams Screen .....	174
Figure 144: Alarms Configuration Screen.....	175
Figure 145: Modify Eagle OAM Alarm Configuration Screen.....	175

Figure 146: Slor Threshold List.....	176
Figure 147: Modify SLOR Threshold Configuration Screen .....	176
Figure 148: Q752/SS7 Alarms Configuration Screen .....	177
Figure 149: Modify Platform Alarm Configuration Screen.....	177
Figure 150: Modify Resource ID Group List Screen (Default) .....	178
Figure 151: Resource ID Group List Screen .....	178
Figure 152: Resource ID Group List Screen .....	179
Figure 153: Q752 Counters List Screen.....	180
Figure 154: Q752 Counter Modify Information Screen.....	180
Figure 155: Final PMF Sigtran configuration Overview .....	182
Figure 156: IXP Subsystem Overview .....	184
Figure 157: Subsystem Pop-Up Menu .....	185
Figure 158: Archived List Of Configurations .....	187
Figure 159: Discovery Results Screen .....	188
Figure 160: Server Role Change Screen.....	189
Figure 161: Storage Server Object and List Table .....	189
Figure 162: Add Screen.....	190
Figure 163: Streams List .....	192
Figure 164: Add Streams Screen.....	192
Figure 165: Stream Modify Screen .....	194
Figure 166: External PDU Stream for Neptune .....	195
Figure 167: External PDU Stream for OCEAN.....	198
Figure 168: External PDU Stream for PMP .....	199
Figure 169: Additional Parameters Screen.....	199
Figure 170: Dataflow Processings List.....	200
Figure 171: xDR Dataflow Assistant Inital Screen-PDU Sources.....	202
Figure 172: Dataflow Assistant Xdr Builder Selection .....	203
Figure 173: Xdr Assistant - Enrichment Selection.....	203
Figure 174: Select Output Format .....	204
Figure 175: Select/Upload Partial Dictionary .....	204
Figure 176: Upload New Partial Format .....	204
Figure 177: Created Enriched Dictionary.....	205
Figure 178: xDR Assistant - Configuring Sessions Screen .....	205
Figure 179: Neptune Assistant access.....	206
Figure 180: Neptune Assistant screen .....	207
Figure 181: Neptune Assistant Advanced parameters .....	211
Figure 182: Add Screen.....	212
Figure 183: Dataflow Building Screen .....	212
Figure 184: Dataflow Input PDU Tab (PDU Dataflows selected).....	212
Figure 185: Dataflow Input PDU Tab (PDU Dataflows selected).....	213
Figure 186: Xdr Builders Tab .....	213
Figure 187: Parameters Tab (with SS7, GPRS, IP and Misc xDR Builders selected) .....	214
Figure 188: Add Screen.....	214
Figure 189: Dataflow Building Screen .....	214
Figure 190: Dataflow Input PDU Tab (PDU Dataflows selected).....	215
Figure 191: Input PDU Tab (PDU Streams selected if working with external PDU streams) .....	215
Figure 192: xDR Builders Tab .....	216
Figure 193: Parameters Tab Showing SS7 ISUP ANSI CDR Tab .....	216
Figure 194: Add Screen.....	217

Figure 195: Dataflow Building Screen .....	217
Figure 196: Dataflow Input PDU Tab (PDU Dataflows selected) .....	217
Figure 197: xDR Builders Tab with VOIP SIP Builders Selected .....	218
Figure 198: Parameters Tab with VoIP SIP-T ANSI CDR Tab .....	218
Figure 199: VoIP SIP with Answer selected.....	218
Figure 200: Add Screen.....	219
Figure 201: Input Streams Screen.....	219
Figure 202: xDR Filter Screen .....	220
Figure 203: xDR Filter Screen .....	220
Figure 204: xDR Filter Screen with condition.....	221
Figure 205: Add Dataflow Processing Screen .....	222
Figure 206: IP Streams Screen.....	222
Figure 207: Xdr Filters Screen .....	223
Figure 208: Output Steams Screen .....	223
Figure 209: Enrichment Screen.....	224
Figure 210: Output Format List.....	224
Figure 211: Select/Upload Partial Dictionary .....	225
Figure 212: Upload New Partial Dictionary .....	225
Figure 213: Created Enriched Dictionary.....	225
Figure 214: Xdr Operation Screen .....	226
Figure 215: Xdr Operation Screen .....	226
Figure 216: Input Streams Screen.....	227
Figure 217: xDR Filter Screen .....	227
Figure 218: xDR Storage Screen.....	227
Figure 219: Xdr Definition Screen .....	228
Figure 220:Input Stream Screen .....	229
Figure 221: Xdr Filter Screen.....	229
Figure 222: xDR Storage Screen.....	229
Figure 223: xDR Storage Screen.....	230
Figure 224: xDR Operation Screen .....	231
Figure 225: Input Streams Screen.....	232
Figure 226: xDR Filter Screen .....	232
Figure 227: xDR Storage Screen.....	232
Figure 228: xDR Storage Screen.....	233
Figure 229: xDR Storage Screen.....	234
Figure 230: Formatting Parameters(CSV) screen .....	235
Figure 231: Formatting Parameters(Misc) screen .....	236
Figure 232: Xdr Builder List Screen .....	237
Figure 233: Add Sessions Screen .....	238
Figure 234: Completed Session In Session List .....	238
Figure 235: Selected Session For Modification .....	239
Figure 236: Create Session Screen .....	240
Figure 237: Completed Xdr Session Screen .....	240
Figure 238: Added Session in Xdr Storage Screen .....	241
Figure 239: Q.752 Processing List Screen .....	242
Figure 240: Inputs Screen (PDU Streams Tab) .....	243
Figure 241: Inputs Screen (PDU Dataflows Tab) .....	243
Figure 242: General Parameters Screen.....	243
Figure 243: Linkset Filters Tab .....	244

Figure 244: Linkset Filters Tab .....	244
Figure 245: Distribution List .....	245
Figure 246: Software List Screen .....	245
Figure 247: Subsystem Preferences List Screen.....	246
Figure 248: Subsystem Preferences List Screen.....	246
Figure 249: SSN Filters List Screen.....	247
Figure 250: SSN Filter Add Screen.....	248
Figure 251: SSN Filter Add Completed.....	248
Figure 252: OPC-DPC-SIO Filters List Screen .....	249
Figure 253: OPC-DPC-SIO Add Screen - Completed.....	250
Figure 254: OPC-DPC-SIO Filter Add Completed .....	250
Figure 255: OPC-DPC-SIO Filter Add Completed .....	252
Figure 256: Add Dictionary Screen .....	252
Figure 257: Modify Dictionary - Dictionary Info Tab.....	253
Figure 258: Modify Dictionary - Dictionary Attribute Info Tab .....	253
Figure 259: Modify Dictionary List Screen .....	255
Figure 260: Dictionary List Screen .....	255
Figure 261: Dictionary List with Unused Dictionary Selected.....	256
Figure 262: Unused Dictionary Discrepancy Report .....	256
Figure 263: Xdr Filter List Screen .....	257
Figure 264: Associated DFP List.....	257
Figure 265: Xdr Filter Add Screen.....	258
Figure 266: Filter Definition Screen .....	259
Figure 267: Added Xdr Filter To List.....	259
Figure 268: xDR Sessions List Screen.....	260
Figure 269: xDR Session Add Screen.....	261
Figure 270: Completed Session In Session List .....	262
Figure 271: Selected Session For Modification .....	262
Figure 272: Modify Session Screen.....	263
Figure 273: Xdr Session Filter Icon.....	264
Figure 274: Modify Session Backup Toolbar .....	264
Figure 275: Sessions List.....	264
Figure 276: Associate Dictionary Screen .....	265
Figure 277: Enrichment Files List Screen .....	265
Figure 278: Xdr Session Add Screen .....	266
Figure 279: Source Code Screen .....	267
Figure 280: FSE automated update configuration screen .....	267
Figure 281: Associate flavor while creating session through xDR Data Flow Assistant.....	295
Figure 282: Associating flavor with Session.....	296

## List of Tables

TABLE 1: SITE CONFIGURATION .....	24
TABLE 2: HOST CONFIGURATION .....	25
TABLE 3: SS7 SIGNALING POINT CONFIGURATION .....	25
TABLE 4: LINKSET CONFIGURATION .....	26
TABLE 5: ASSOCIATIONS CONFIGURATION .....	26
TABLE 6: SS7 LINK CONFIGURATIONS .....	26
TABLE 7: MONITORING GROUP CONFIGURATION .....	27
TABLE 8: SITE CONFIGURATION .....	29
TABLE 9: HOST CONFIGURATION .....	29
TABLE 10: NODE CONFIGURATION .....	29
TABLE 11: SS7 SIGNALING POINT CONFIGURATION .....	30
TABLE 12: GB SIGNALING POINT CONFIGURATION .....	30
TABLE 13: LINKSET CONFIGURATION .....	31
TABLE 14: SS7 LINK CONFIGURATION .....	31
TABLE 15: GB LINK CONFIGURATIONS .....	31
TABLE 16: PMF CARD CONFIGURATION .....	32
TABLE 17: PMF PORT CONFIGURATION .....	32
TABLE 18: PMF PORT ASSIGNMENT CONFIGURATION .....	33
TABLE 19: SSN FILTER CONFIGURATION .....	35
TABLE 20: PC FILTER CONFIGURATION .....	35
TABLE 21: GT FILTER CONFIGURATION .....	36
TABLE 22: RAW FILTER CONFIGURATION .....	36
TABLE 23: SS7 COMBO FILTER CONFIGURATION .....	36
TABLE 24: IP ADDRESS FILTER CONFIGURATION .....	37
TABLE 25: IP PORT FILTER CONFIGURATION .....	38
TABLE 26: VLAN FILTER CONFIGURATION .....	38
TABLE 27: IP COMBO FILTER CONFIGURATION .....	38
TABLE 28: DLCI FILTER CONFIGURATION .....	39
TABLE 29: DCLI.CSV FILE .....	39
TABLE 30: ALARM SEVERITY OFFSETS .....	43
TABLE 31: THIRD PARTY (EXTERNAL) APPLICATION COLUMNS .....	44
TABLE 32: DATA WAREHOUSE ADD SCREEN .....	52
TABLE 33: IXP SUBSYSTEM ADD SCREEN FIELD DESCRIPTIONS .....	53
TABLE 34: IXP STORAGE SERVER STATES .....	56
TABLE 35: IXP SERVER DESIGNATIONS .....	56
TABLE 36: IXP SUBSYSTEM ADD SCREEN .....	57
TABLE 37: XMF SUBSYSTEM ADD SCREEN FIELD DESCRIPTIONS .....	60
TABLE 38: XMF SUBSYSTEM ADD SCREEN FIELD DESCRIPTIONS .....	62
TABLE 39: ADD NODE SCREEN .....	68
TABLE 40: ADD LINKSET SCREEN .....	69
TABLE 41: SECOND ADD SIGNALING POINT SCREEN .....	70
TABLE 42: THIRD ADD SIGNALING POINT SCREEN .....	71
TABLE 43: LINK NETWORK VIEW INITIAL SETUP SCREEN .....	73
TABLE 44: LINK NETWORK SETUP PHASE TWO .....	73
TABLE 45: GB ADD SCREEN .....	77
TABLE 46: IP CARD SPECIFICATIONS .....	80

TABLE 47: LINK NETWORK VIEW FIELDS.....	90
TABLE 48: SELECT SS7 LINKSET SCREEN.....	90
TABLE 49: SELECT GB LINKS SCREEN.....	93
TABLE 50: IP STREAM SELECTOR FILTER FIELDS .....	93
TABLE 51: XMF SUBSYSTEM POP-UP MENU OPTIONS .....	96
TABLE 52: RANGES FOR PRE-DEFINED SUBSYSTEM PARAMETERS.....	100
TABLE 53: THRESHOLD VALUES.....	103
TABLE 54: ADDING MONITORING GROUP .....	108
TABLE 55: MOVE LINKSET AND ASSOCIATION MONITORING SCREEN.....	109
TABLE 56: TRAFFIC CLASSIFICATION FIELDS.....	112
TABLE 57: MSU AND EMP CORESPONDANCE VALUES .....	117
TABLE 58: ADD SSN FILTER SCREEN FIELDS.....	118
TABLE 59: ADD GLOBAL TITLE FILTER SCREEN FIELDS.....	119
TABLE 60: POINT CODE FILTER CREATE/MODIFY INFORMATION SCREEN FIELDS .....	120
TABLE 61: RAW FILTER CONFIGURATION MNEMONICS .....	129
TABLE 62: SCCP RAW FILTER EXAMPLE.....	131
TABLE 63: ADD RAW FILTER SCREEN FIELDS .....	132
TABLE 64: ADD / MODIFY COMBINATION FILTER SCREEN FIELDS .....	133
TABLE 65: ADD DLCI FILTER SCREEN FIELDS.....	135
TABLE 66: ADD DLCI FILTER SCREEN FIELDS.....	135
TABLE 67: ADD GB SAPI FILTER SCREEN FIELDS.....	137
TABLE 68: ADD / MODIFY PORT FILTER SCREEN FIELDS.....	139
TABLE 69: IP FILTER SCREEN FIELDS.....	140
TABLE 70: PORT FILTER SCREEN FIELDS .....	142
TABLE 71: VLAN FILTER SCREEN FIELDS.....	144
TABLE 72: ADD SAPI FILTER FOR GP OVER IP SCREEN FIELDS.....	145
TABLE 73: COMBINATION FILTER SCREEN FIELDS.....	147
TABLE 74: SCTP ASSOCIATION FILTER SCREEN FIELDS.....	149
TABLE 75: SIGTRAN OTHERPROT ASSOC FILTER SCREEN FIELDS.....	151
TABLE 76: SIGTRAN PC FILTER SCREEN FIELDS .....	152
TABLE 77: SIGTRAN SS7 SIO SCREEN FIELDS.....	154
TABLE 78: SIGTRAN SS7 GLOBAL TITLE (GT) SCREEN FIELDS .....	156
TABLE 79: SIGTRAN SS7 SSN FILTER SCREEN FIELDS .....	157
TABLE 80: SIGTRAN SS7 SSN FILTER SCREEN FIELDS .....	159
TABLE 81: ADD DCPPI FILTER SCREEN FIELDS .....	160
TABLE 82: COMBINATION FILTER SCREEN FIELDS.....	162
TABLE 83: DIRECTION, SERVICE INDICATOR, FILTER&TRUNCATION DETAILS OF SS7 DATAFLOW SCREEN FIELDS..	165
TABLE 84: ADD / MODIFY IP DATAFLOW SCREEN FIELDS .....	170
TABLE 85: PMF SIGTRAN FILTERS USAGE .....	182
TABLE 86: IXP SUBSYSTEM POP-UP MENU OPTIONS .....	185
TABLE 87: STORAGE POOL SERVER STATES .....	190
TABLE 88: VALUES ASSOCIATED WITH EACH STATE .....	190
TABLE 89: NSP APPLICATIONS EFFECTED BY EACH STATE .....	191
TABLE 90: NEPTUNE OUTPUT CAPTURE PORT AND ID .....	195
TABLE 91: DATAFLOW PROCESSINGS LIST TABLE .....	201
TABLE 92: DATAFLOW PROCESSING NAMING CONVENTIONS .....	201
TABLE 93: NEPTUNE ASSISTANT UP STREAMS ALLOCATION.....	207
TABLE 94: NEPTUNE ASSISTANT EXTERNAL PDU STREAMS .....	207

TABLE 95: MISC FIELDS DESCRIPTION .....	236
TABLE 96: XDR BUILDER LIST DESCRIPTIONS .....	237
TABLE 97: ADD SSN FILTER SCREEN .....	248
TABLE 98: ADD OPC-DPC-SIO FILTERS SCREEN .....	249
TABLE 99: XDR TABLE LAYOUT.....	260
TABLE 100: XDR TOOL BAR .....	261
TABLE 101: ADD POLICIES SCREEN FIELD DESCRIPTIONS.....	269
TABLE 102: INITIAL STEP SCREEN .....	278
TABLE 103: INITIAL STEP SCREEN .....	279
TABLE 104: SS7 SCCP SCREEN .....	281
TABLE 105: SS7 SUA SCREEN .....	281
TABLE 106: SS7 TRANSPORT SCREEN.....	282
TABLE 107: BEFORE .....	284
TABLE 108: AFTER (IMPACTS BOLDED).....	285
TABLE 109: BEFORE .....	286
TABLE 110: AFTER (IMPACTS BOLDED).....	286
TABLE 111: BEFORE .....	287
TABLE 112: AFTER (IMPACTS BOLDED).....	287
TABLE 113: BEFORE .....	288
TABLE 114: AFTER (IMPACTS BOLDED).....	288
TABLE 115: BEFORE .....	290
TABLE 116: AFTER (IMPACTS BOLDED).....	290
TABLE 117: BEFORE .....	291
TABLE 118: AFTER (IMPACTS BOLDED).....	291
TABLE 119: BEFORE .....	292
TABLE 120: AFTER (IMPACTS BOLDED).....	293
TABLE 121: BEFORE .....	293
TABLE 122: AFTER (IMPACTS BOLDED).....	294

## Chapter 1: About This Help Text

---

### Overview

The Performance Intelligence Center (PIC) system monitors a network to collect PDUs for correlation and storage. The Centralized Configuration Manager (CCM) is a management application for configuring the PIC system so that these PDUs can be utilized in different ways by the Network Software Platform (NSP) applications such as ProTraq, ProPerf, ProAlarm, ProTrace, ProDiag and Data Feed Export.

A typical PIC system consists of many computer servers and data storage systems that are connected to each other over an IP network. The computer systems that collect, process and store data are located in the premises of the service provider that contains the switching, signaling and routing equipment. These provider locations are referred to as sites. A large PIC system consists of many such sites with each site containing multiple servers performing the functions of data collection and storage, xDR generation and storage as well as KPI generation and storage. A site may also contain a data storage unit storing terabytes of data.

PIC web-based applications, such as CCM, are hosted by a cluster of application servers located at the customer's Network Operations Center (NOC). It is quite common for a PIC system to consist of over 100 computer servers located across a wide geographical area. CCM enables system administrators to configure the system using the following principles:

- Administration from a single point - all system administration tasks are performed from the system administration console.
- Administration utilizing a global view - the system administrator provisions the system as a single logical entity. The centralized configuration is automatically propagated to the appropriate servers where applications share common data.
- Multi-user access - the system allows multiple users to provision simultaneously.

### Scope and Audience

This guide is designed to assist the NSPConfigManager and NSPAdministrator in working with the Centralized Configuration Manager administration application. Users should find the information they need to cover important activities required to manage Data Feed Export.

### About the Performance Intelligence Center

The Performance Intelligence Center (PIC) is a monitoring and data gathering system that provides network performance, service quality and customer experience - across various networks, technologies, protocols, etc. Beyond monitoring performance and gathering data, the solution also provides analytics, actionable intelligence and potentially an intelligent feedback mechanism. It allows Service Providers to simultaneously look across the Data Link, Network, Transport and Application layer traffic to better correlate and identify the impact of network problems on revenue generating applications and services.

PIC functionality is based on the following general flow. The Integrated Message Feeder (IMF) is used to capture SS7 and SigTran traffic. The Probed Message Feeder (PMF) is used to capture both SS7 and IP traffic. Both products forward Probe Data Units (PDUs) to the Integrated xDR Platform (IXP). The IXP stores this traffic data and correlates the data into detailed records (CDRs, IPDRs, TDRs, etc.).


The IXP then stores the data on the system for future analysis. The Network Software Platform (NSP) provides applications that mine the detailed records to provide value-added services such as network performance analysis, call tracing and reporting.

PIC centralized configuration tasks fall into one of two categories:

- Data Acquisition and Processing – the configuration of the probes, routing of PDUs to the xDR builder setup, KPI generation, data feeds, etc.
- PIC System Administration - the configuration of monitoring sites, configuring PIC servers, setting up permissions, etc.

**Note:** For more information see Centralized Configuration Manager Administrator's Guide.

This is a graphic overview of the PIC system.

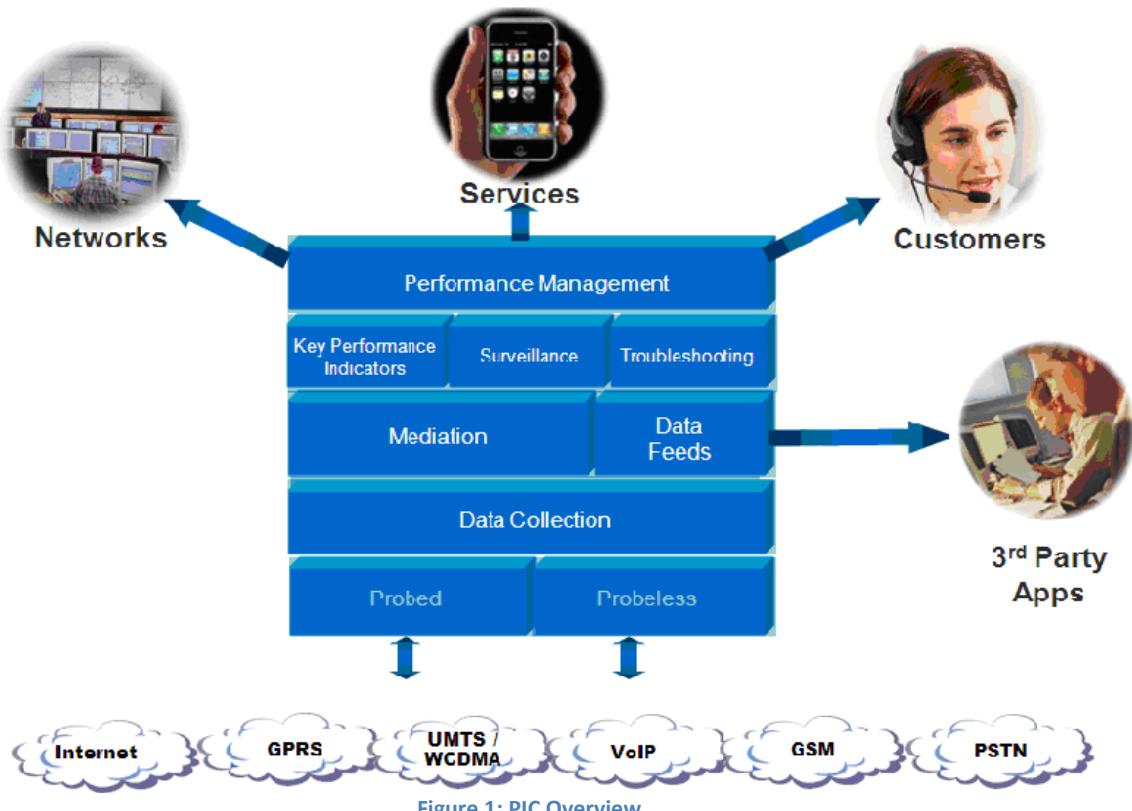

After setting the formatting parameters, click **Next** to move to the next screen in the wizard.

## PIC Documentation Library

PIC customer documentation and online help are created whenever significant changes are made that affect system operation or configuration. Revised editions of the documentation and online help are distributed and installed on the customer system. Consult your NSP Installation Manual for details on how to update user documentation. Additionally, all customer documentation is available on the Oracle Technology Network (OTN). Release Notes are available on OTN with each new release of software. The Release Notes list the PRs that have been resolved in the current release and the PRs that are known to exist in the current release.

Listed below is the entire PIC documentation library of User's Guides.

- Security Guide
- NSP Security User's Guide

- Alarm Forwarding Administrator's Guide
- ProAlarm Viewer User's Guide
- ProAlarm Configuration User's Guide
- Centralized Configuration Manager Administrator's Guide
- Customer Care User's Guide
- ProTraq User's Guide
- ProPerf User's Guide
- ProPerf Configuration User's Guide
- System Alarms User's Guide
- ProTrace User's Guide
- Data Feed Export User's Guide
- Audit Viewer Administrator's Guide
- ProDiag User's Guide
- SigTran ProDiag User's Guide
- Reference Data User's Guide
- Exported Files User's Guide
- Scheduler User's Guide
- Quick Start User's Guide

## Common instructions

For instructions about customer support, basic workflow and common features across application (browser compatibility, login/logout, user preferences...) please refer to Quick Start Guide for which a link can be found on the banner of each web page.

## Chapter 2: Key Concepts

---

### About PIC

The Performance Intelligence Center, (PIC), functionality is based on the following general flow. The Integrated Message Feeder (IMF) is used to capture SS7 and SigTran traffic. The Probed Message Feeder (PMF) is used to capture both SS7 and IP traffic. Both products forward the PDUs to the Integrated xDR Platform (IXP). The IXP stores this traffic data and correlates the data into detailed records (CDRs, IPDRs, TDRs, etc.). The IXP then stores the data on the system for future analysis. The Network Software Platform (NSP) provides applications that mine the detailed records to provide value-added services such as network performance analysis, call tracing and reporting.

PIC centralized configuration tasks fall into one of two categories:

- Data Acquisition and Processing – the configuration of the probes, routing of PDUs to the xDR builder setup, KPI generation, data feeds, etc.
- PIC System Administration - the configuration of monitoring sites, configuring PIC servers, setting up permissions, etc.

### CCM Overview

*Centralized Configuration Manager* (CCM) is developed to consolidate all configuration data (IMF, PMF and IXP) into a single database. The common network-wide configuration is used to enhance the capabilities of NSP applications.

### About Data Acquisition and Processing

Data acquisition and processing refers to collecting PDUs from monitored networks, generating xDRs and KPIs from the collected PDUs and storing/forwarding the data for use by applications.

## IMF Data Acquisition

IMF data acquisition comprises three general steps. They are:

1. Eagle timestamps and delivers MSUs to an IMF
2. IMF processes the MSUs and filters it for delivery to an IXP
3. The IXP processes the MSUs for storage, xDR correlation and KPIs

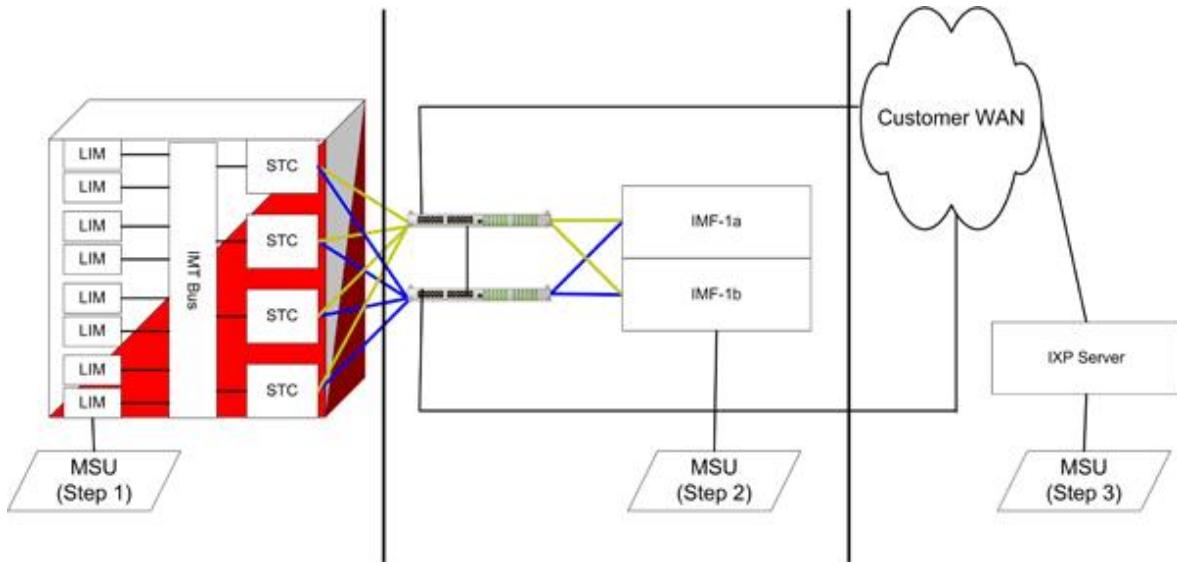


Figure 2: Imf Acquisition Sequence

## PMF E1/T1 Data Acquisition

PMF E1/T1 data acquisition comprises three general steps. They are:

1. PMF acquires MSUs from SS7 tap and timestamps them
2. PMF processes the MSUs and filters them for delivery to an IXP
3. The IXP processes the MSUs for storage, xDR correlation and KPIs

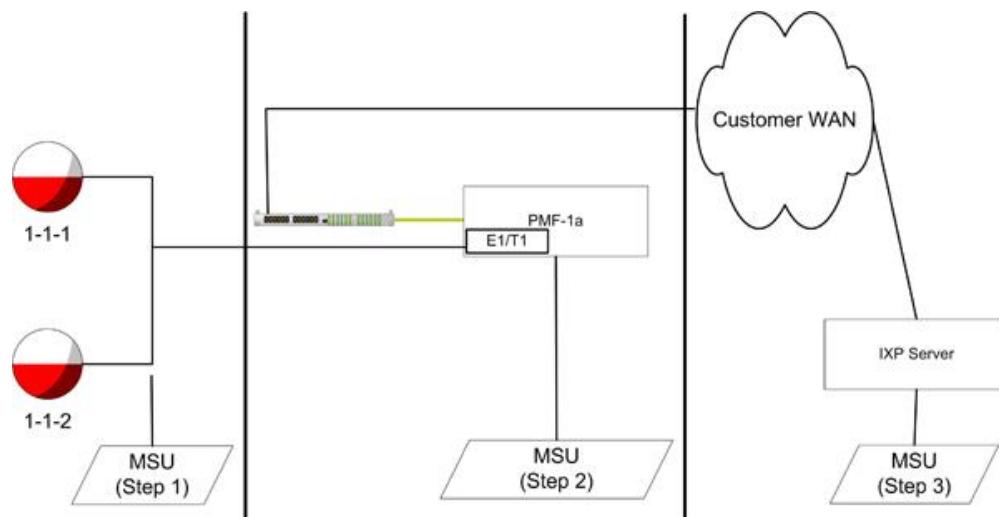


Figure 3: Pmf E1/T1 Data Acquisition Sequence

## PMF IP Data Acquisition

PMF IP data acquisition comprises three general steps. They are:

1. PMF acquires MSUs that match a filter from the IP tap and timestamps them
2. PMF processes the MSUs and filters them for delivery to an IXP
3. The IXP processes the MSUs for storage, xDR correlation and KPIs

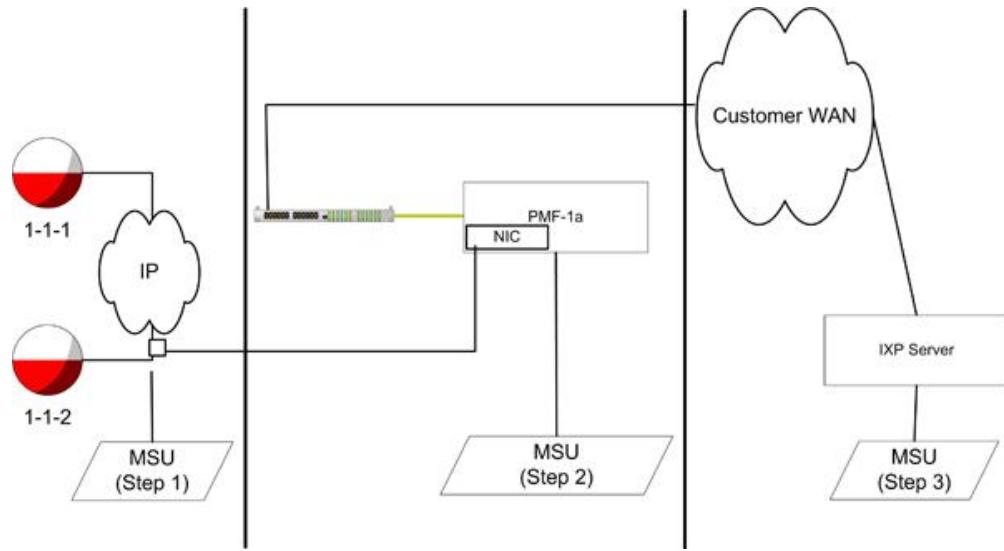


Figure 4: Pmf IP Data Acquisition Sequence

## PIC NTP Sources for Accurate Time Stamping

The figure shows the PIC NTP timestamping process and an example of a valid NTP configuration. In this example, an NTP server provided by the customer is referenced as the NTP source for the NSP server. The IXP servers use the NSP server as their NTP source. The IMF servers also use the NSP server as their NTP source, and then also the IMF-1a and IMF-1b servers broadcast NTP to the Eagle for it to use to timestamp MSUs. The PMF servers, not shown, also use the NSP server as their NTP source, and then timestamps MSU's internally.

**Note:** Some MSUs that need to be correlated into an xDR happen with 5 milliseconds between them, therefore the NTP server that is provided by the customer must meet the specification of a stratum 3 (+/- 4.6 microseconds) to insure accurate correlation of xDRs.


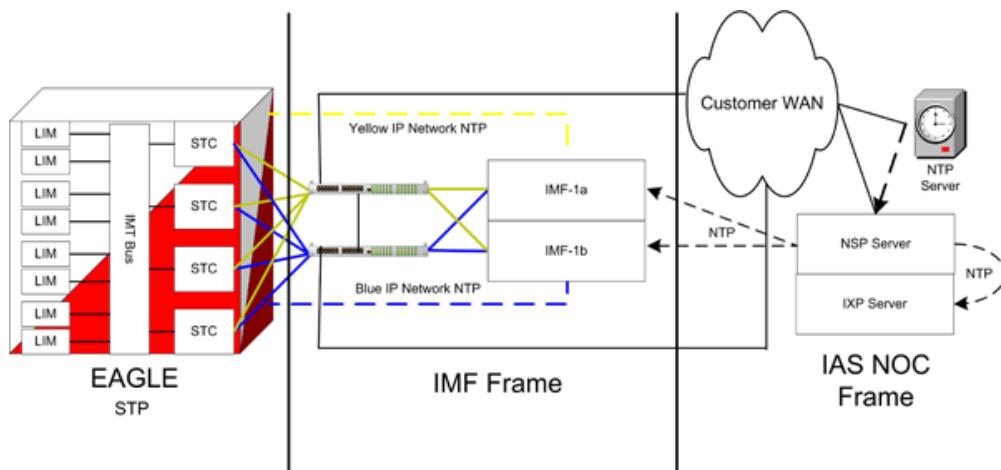


Figure 5: PIC NTP Example

## Overall PIC Configuration

This figure illustrates the three major data acquisition processes described above and shows the PIC components at each level of functionality that have access to the acquired and correlated data.

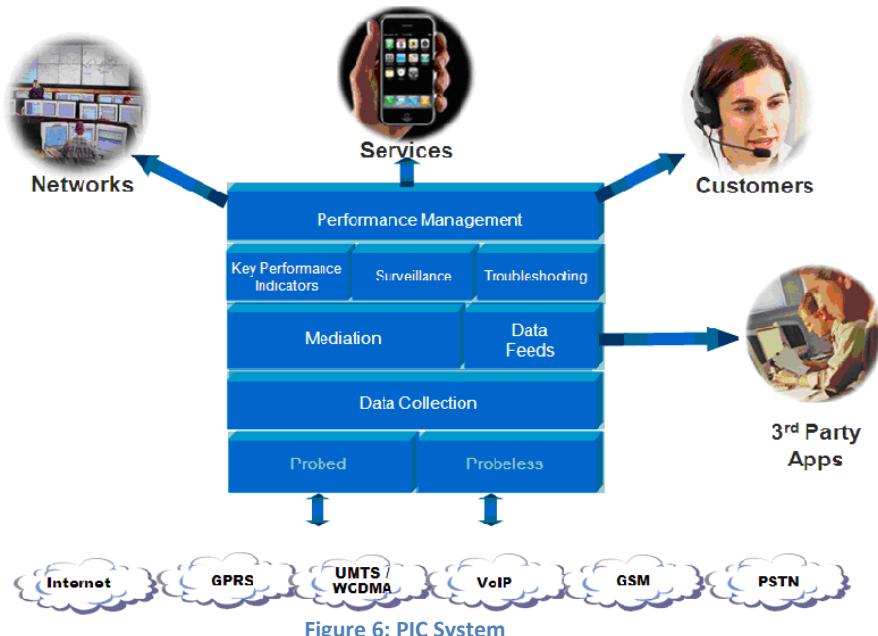

Configuration is required at each level of the system, up to and including the storage of the data. The configuration concepts related to the various components shown in the figure.

These concepts are:

- Monitored Network Elements
- PDU Collection
- PDU Filtering and Routing
  - Input Stream
  - Dataflow
  - Destination (Datasource)
  - Routing
  - RID Groups
- Q.752 Processing
- xDR Generation
  - Sessions and Dictionaries
- KPI Generation
- Network Views
- Report configuration

## Monitored Network Elements

The term, Network Elements, refers to customer network SS7, GPRS and IP elements. These elements are divided into:

- Node Elements - elements, linksets and links that are contained in SS7, GPRS and IP nodes.
- Non-node Elements - SS7, GPRS and IP elements. Non-node elements are divided into three main categories
  - SS7 elements:
    - Linksets

- Associations
- Links
- Signaling Points (SPs)
- GPRS elements:
  - Gb links
  - Signaling Points (SPs)
- IP elements:
  - Signaling Points (SPs)
  - IP Cards
  - Application Servers (AS)
  - Associations
  - Application Server Process (ASP)

Examples of network elements include: SS7 service switching points (SSP), SS7 linksets, GPRS service switching gateway node (SGSN), Voice over IP (VoIP), etc. The PIC system monitors some of these elements and collects the messages transported between the elements. The messages are referred to as PDUs.

The differentiation between nodes and non-node network elements enables greater flexibility in working with linksets, links and associations.

In CCM, network elements are added to the centralized database in one of the following two ways:

- Through discovery from associated IMF data collectors - you can select a specific data collector and issue the command to discover or synchronize network elements. The data collector reports to CCM all of the network elements it discovers and CCM adds them to the centralized database.
- Through manual creation - for configuring PMF you can define each individual network element using the user interface.

Because network elements are so fundamental to the rest of the provisioning process, it is recommended that they be setup right after a site has been created.

## About PDU Collection

Data collectors monitor and collect PDUs exchanged between nodes. The data collectors include the IMF and PMF.

### PDU Collection on SS7 Networks (IMF)

In order for the PDUs to be collected by IMF for SS7 networks, you must complete these actions in the following order:

1. Create monitoring group(s) which are assigned automatically to an IMF server.
2. Assign linksets, (network elements), to the monitoring group(s)

**Note:** In the case of utilizing SigTran Fast Copy you assign an association to a monitoring group.

3. Create PDU dataflows
4. Route the assigned PDU dataflows to input streams on IXP.

### PDU Collection on SS7 Networks (PMF) and GPRS

In order for the PDUs to be collected by PMF for SS7 networks, following steps must be completed:

1. Select an E1/T1 card

**Note:** For PDUs from SS7-GPRS networks, you can select a SPAN (E1/T1) card on a specific PMF server.

2. Configure the required ports on the E1/T1 card
3. Create an SS7 or Gb link for each E1/T1 card port

4. Assign links to ports on the E1/T1 card
5. Create PDU dataflows
6. Route the assigned PDU dataflows to input streams on IXP

### PDU Collection on IP Networks (IMF or PMF)

For collecting PDUs from IP networks perform the following actions:

1. Select a NIC card on a specific PMF server
2. Create IP link(s) to be monitored by each NIC port
3. Assign these links to a monitoring port on a specific PMF server
4. Create a link network view and choose an IP link
5. Create an IP dataflow
6. For PMF, assign the link network view to the IP dataflow  
For IMF, assign an association to the IP dataflow
7. Route the assigned PDU dataflows to input streams on IXP

## PDU Routing and Filtering

The PDUs collected by the data collectors must be routed to one or more xDR builders for creating xDR records. These routes are configured using CCM.

There are some important considerations in configuring PDU routes.

- Not all PDUs need to be sent to an xDR builder, therefore, a data collector allows filters to be applied to the PDUs it receives. (See CCM step 2 in IMF Acquisition Sequence, PMF E1/T1 Data Acquisition Sequence, PMF IP Data Acquisition Sequence.)
- A PDU can be routed to multiple xDR builders for building different types of xDR records. (See CCM step 2 in IMF Acquisition Sequence, PMF E1/T1 Data Acquisition Sequence, PMF IP Data Acquisition Sequence.)
- An xDR builder needs to receive related PDUs that can be converted into an xDR record. For example, in order for the xDR builder to create an ISUP CDR, it needs to receive all the PDUs associated with a call (IAM, ACM, ANM, REL, RLC). (See CCM in IMF Acquisition Sequence, PMF E1/T1 Data Acquisition Sequence, PMF IP Data Acquisition Sequence.) At the same time, the xDR processing can be distributed across multiple xDR builders for load sharing (see CCM About Distributions). The routing must be configured to support such grouping. This is often the most complex configuration task.
- An SS7 xDR builder needs to “know” when to handle multi-legged PDUs it receives from a data collector. Duplicate PDUs can result when multiple points in the customer network are being monitored by the same data collector and the same PDU passes through these points. Reference ID groups (see CCM topic About RID Groups) provide a mechanism for handling duplicate PDUs. If this area is not properly planned and configured, then xDR correlation problems can occur.
- There is a resource “cost” to routing PDUs to the xDR builders if the data collectors and the xDR builders are at different geographical locations and WAN resources have to be used. While routing, consider minimizing WAN traffic by routing PDUs to local xDR builders or routing over a least-cost route.

**Note:** The resource cost is bandwidth usage and therefore to conserve bandwidth you can use filtering.

For more details on these important considerations, see CCM About the xDR Dataflow Assistant. For details on data flow procedures see CCM topic Configuring Dataflow Processings.

The following sections describe the logical constructs you use to configure the routes between the data collector and xDR builders for generating the xDRs required for NSP applications.

## About Traffic Classification Filtering

Input Streams enable IP traffic to be classified, (using filtering), from one or more NIC ports into streams of data. A stream is created on a group of NIC ports by defining an IP Filter. After input streams are configured, if a received PDU does not match any of the filtering criteria, it is discarded.

**Note:** Because of the large volume of IP traffic, it is a common practice to discard unnecessary PDUs at the data collector level for IP networks.

## About IP Dataflows

An IP Dataflow routes PDUs from an IP stream to IXPs.

## About Dataflows

A Dataflow provides a way to filter and route MSUs.

## Dataflows Versus IP Streams

A Dataflow is similar to an IP stream because it allows SS7 and Gb traffic to be filtered. A Dataflow has a filter that is applied to a group of SS7 linksets or Gb links (instead of NIC ports in case of input streams). In the case of IP traffic, an IP dataflow is basically a "pass through" in terms of filtering. Dataflows are also used to configure additional routing information.

An IP stream is very similar, in concept, to a dataflow because applies filters to classify traffic. The difference is that for input streams, the classification is performed as soon as a PDU is received by a PMF. For Dataflows, the classification is done after the data has been received by IMF/PMF and then stored. The reason for this difference is that the volume of IP traffic is much larger and it is more efficient to discard unnecessary PDUs rather than storing them and discarding them later. One limitation of input filters, like input streams, is that Q.752 or similar processing cannot be done on discarded traffic since the Q.752 processing is done on cached PDUs.

## About Data Transport Service (DTS)

Routing data from xMF (IMF/PMF) to IXP uses Data Transport Service (DTS) exclusively. Input Streams are created on IXP to route the dataflow from the xMF.

All the Streams created on the IXP subsystems can be viewed in the PDU Dataflow routing screen.

PDU Dataflows are also routed to one or more input streams. The PDU Dataflow defines the criteria (linkset/links and filters) for PDUs to be sent for correlation. The input Streams provide the interface for the IXP to receive the flow of PDUs.

## About Input Streams

Input streams, (for more information, see topics About Dataflows and About Streams, are constructs for grouping Dataflows for the purpose of routing to one or more xDR builders. The grouping is done so that PDUs belonging to a Dataflow are routed over a single communication stream to an xDR generator, resulting in optimized data collection resources.

CCM supports both Message Feeder Protocol (legacy applications only) and Data Transport Service.

When using DTS, the IXP pulls data from a Datasource (an IP address and port on the IMF or PMF).

**Note:** An IXP subsystem has a limit of 255 input Streams. IXP also uses four input Streams for monitoring purposes, so the functional limit is 251. If this limit is exceeded, then CCM produces an error message stating that the limit has been exceeded. If this happens, streams will have to be routed differently to keep within the limit.

## About Routing

Is the process of routing Dataflows to IXP input Streams.

## About RID Groups

An RID group enables differentiation of multi-legged PDUs. For example, an SS7 xDR builder needs to know how to differentiate multi-legged PDUs it receives so that it does not discard the original and multi-legged PDUs as erroneous during error checking, resulting in loss of xDR records. A multi-legged PDU occurs when two points (linksets) in the customer's network are being monitored and the same PDU passes through both points (it is collected twice) and the PDU traffic from both linksets is routed to the same builder. To handle this situation, the SS7 linksets must be grouped carefully into RID groups, (see [About Resource ID Groups \(RID\)](#)), and the xDR builder informed of the associated RID group for each PDU so that a multi-legged PDU that has already been reported from a different RID group can be processed separately by the builder. This prevents the first PDU from being discarded as well, and the xDR record for it can be generated and stored.

## About Auto RID

Auto RID is used for IMFs where links are monitored at the Eagle side. This feature is also used where "edge" devices, devices that do origin-based routing, are involved. In addition, Auto RID can be used for network elements (ssp/scp) with one point code. Auto RID Reverse is used when probes are linked near the network elements (scp/ssp).

## About Q752 Processing

PIC supports a subset of the ITU Q.752 standards. Q.752 defines a standard set of measurements and alarms for monitoring the health of SS7 networks. Both IMF and PMF perform the low-level processing required for Q.752. That is, IMF and PMF apply processing on received PDUs to record key performance indicators (see [KPI Generation](#)) and generate alarms if thresholds are exceeded. The KPI counters are sent over special Dataflows to xDR builders for consolidation and further processing. One of the tasks of a CCM user is to configure the Q.752 Dataflows as well as the Q.752 alarms thresholds (see [About Q.752 Counters](#)).

## About xDR Generation

xDR builder configurations are managed by CCM in the Mediation perspective. The details of the xDR builder use and configuration are outlined in the Mediation perspective.

## About Sessions and Dictionaries

Once xDR generation is configured for a builder, xDR records are stored in a session. A session is associated with a dictionary. The dictionary mechanism is a way of describing the content of the xDR fields. NSP applications, such as ProTrace use the dictionary to access and display the data making the applications independent of the xDR record format.

The IXP and Data Server (legacy) applications provide a mechanism for CCM to discover sessions and dictionaries. Once discovered, the sessions can be accessed by NSP applications such as ProTrace.

**Note:** A session name must be unique for each IXP Subsystem or Dataserver, but sessions can have identical names if they reside on separate IXP subsystems.

## KPI Generation

The PIC system enables you to configure KPIs using the NSP application ProTraq Configuration. ProTraq defines the rules for generating KPIs from the xDR records that have been configured.

KPI data is stored in KPI sessions in a dictionary format like xDR records. Similarly, KPI sessions are discovered by CCM. Once discovered, the sessions can be accessed by NSP applications like Data Feed Export or ProPerf.

## About xDR Data Feeds

PIC supports exporting of xDRs to third-party applications. This function is referred to as a data feed export. All data feeds are configured by using the Data Feed Export application. For more information on data feeds, see the *Data Feed Export User Guide*.

## About Network Views

Network views are logical, user-defined groupings of elements in a PIC system. The term network view is used to denote some aspect, or perspective, of a customer network. For example, it could be the physical elements comprising a network, or a sub-network, or another carrier's network or a certain type of traffic on the network.

Network views can be nested in hierarchical order and contain other network views (children) that themselves may contain network views and so on depending on how large or complex the network is.

Grouping elements together into network views enables you to divide up the network into more manageable units, not only for convenience, (elements in a network view can be referred to from other parts of the system as a single unit, by referring to the network view), but also for authorization purposes. For example, you can create a network view that only shows certain application users a subset of the total data and this is managed by assigning users rights (privacy settings) to specific network views. Network views are designed to be the primary mechanism in the PIC system to select a dataset. Applications like ProTrace and ProDiag use network views.

The types of elements that can be grouped together into a network view include PDU sources such as SS7 linksets, Gb links, Input streams or xDR sessions. There are two types of network views:

- Session-based network views - xDR sessions can be grouped together to create a view of the network. The ProTrace application uses session-based network views for filtering and call tracing.
- Link-based network views - links (SS7, Gb, IP) can be grouped together to create a view of the network. This type of network view is used for associating linksets, links, and Input streams to PDU Dataflows. The ProTrace also uses link-based network views for filtering and call tracing.

## About Security and Permissions

NSP comes with a security and privacy module, (see *NSP Security User Guide* for more information), that enables objects, such as network views, that are a part of the NSP system to be protected. Each of these objects has an owner and the owner can set the privacy level so that users who belong to specified user groups can have read, write and/or execute privileges on an object(s).

CCM enables an owner to create and modify objects. It also allows the owner of an object to set the privacy of that object. When an object is created or discovered, the user who created or discovered the object becomes the owner of that object and can assign privacy privileges for that object and can set the level of access for other users, or groups of users using that object.

## About Equipment Registry

The PIC system is comprised of many applications that are running in a distributed environment. These applications need to be configured for them to perform their functions. Applications are created, discovered and configured using the Equipment Registry perspective.

The principle elements in equipment registry are:

- Sites
- Subsystems
- Hosts

## About Sites

Sites represent logical locations where a PIC application is located. A PIC application either runs on a single server or it may be distributed over a group of servers (referred to as a subsystem). Using CCM, you define sites.

When you create a site, follow this guideline:

- There can be, at most, one XMF subsystem (IMF or PMF) for a given site. For example, you can have one IMF or PMF subsystem along with multiple IXP subsystems. For this reason, a physical location where there are multiple xMF subsystems needs to be represented in CCM by multiple sites.

**Note:** An IMF subsystem can monitor only one Eagle STP.

## About Hosts

A host refers to a server that runs a PIC application. For each PIC server in a site, there is a host in CCM, therefore, allowing one site to contain multiple hosts.

## About Subsystems

Some PIC applications are stand-alone and some are clustered. A stand-alone application has only one instance running on one host. Examples of stand-alone applications include ICP and Data Server (legacy systems). Some of the PIC applications run in more than one server or cluster, but to the outside world they behave as a single entity. A cluster of application instances is referred to as a subsystem. Examples of applications that run as subsystems include:

- XMF (IMF or PMF)
- IXP
- DWH

### ***About Server Roles***

Primary and secondary roles are not assigned to the servers in the xMF subsystems anymore. Server roles are made transparent to the user and server role changes are also automatic. For an IXP subsystem, the CCM assigns the primary role to server 1a and secondary role to server 1b. The rest of the servers are assigned ancillary roles.

When you discover the first application that belongs to the subsystem, that application is automatically designated as the primary application, and a subsystem entry is automatically created in the system. When subsequent applications are discovered, the applications are designated as backup and ancillary respectively.

## About Report Configuration

CCM provides a means of configuring a configuration report using MS Excel spreadsheet. When you have run the report, each page is dedicated to a specific aspect of the system (Network Views, Network Elements, Role Profils, Acquisition, etc). The configuration report is created from the Home Page.

## Chapter 3: Using CCM

---

### About CCM

This chapter provides a general overview of CCM. The topics covered are:

- Logging into CCM
- Understanding the CCM user interface

## Opening CCM

To open an application, click the **CCM** icon located in the Configuration Section of the Portal Screen.

The CCM Home screen opens.

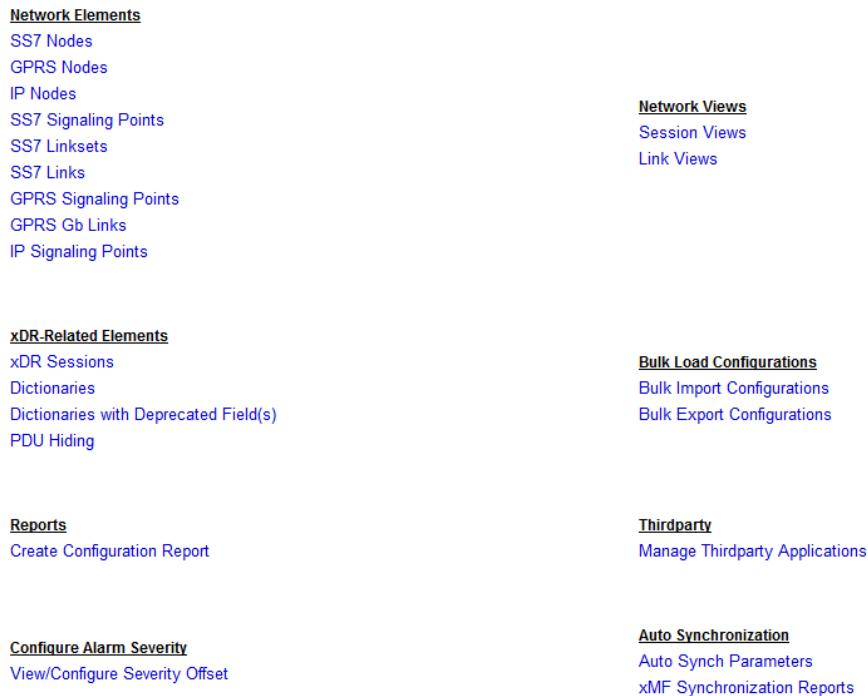


Figure 7: CCM Home Screen

The screen is divided into two main sections:

- Menu Tree - located on the left-hand section shows the three main perspectives and enables you to navigate through the data (not shown).

The six perspectives are:

- Equipment Registry
- Network Elements
- Network Views
- Acquisition
- Mediation
- Reference Data

- Screen body - on the Home screen provides links for *Network Elements*, *Network Views* and *xDR-Related Elements*, *Bulk Load Configurations*, *Reports*, *Thirdparty applications* and *Alarm Severity Configuration*.

On other screens it allows you to create, modify, delete, or list configured data. Each of these objects is discussed as specific subjects.

## Understanding the CCM Screen

This section provides a brief overview of the screen elements for CCM. For more detailed information on NSP screen elements such as the toolbar and function buttons.

**Note:** Do not use the Function Keys (F1 through F12) when using the NSP. Function keys work in unexpected ways. For example, the F1 key will not open NSP help but will open help for the browser in use. The F5 key will not refresh a specific screen, but will refresh the entire session and will result in a loss of any entered information.

### About Tool bar and Right-click Menu Functions

The section describes the list screen and pop-up menu that have similar toolbar functionality. The functionality is divided into three sections:

- Buttons
- Column functions
- Right-click menu options from the element list

#### Buttons and Pop-up Menus

Buttons are located either on a List screen toolbar or on the right click pop-up menu in the element section. They are:

**Note:** Not all tool bar button functions appear in the pop-up menus. Pop-up menu is specifically for the element. The tool bar buttons are general functions for that screen such as first record, next record, previous record, etc.

- First record - enables you to move to the first record
- Next record - enables you to move to the next record
- Previous record - enables you to move to the previous record
- Last record - enables you to move to the last record
- Add - enables you to add a record
- Modify - enables you to modify the selected record
- Delete - enables you to delete the selected record
- Search - enables you to search for a specific record
- Synchronize/Discover - enables you to either discover new applications or Synchronize the Subsystem after any changes

**Note:** Do not use the Function Keys (F1 through F12) when using the NSP. Function keys work in unexpected ways. For example, the F1 key will not open NSP help but will open help for the browser in use. The F5 key will not refresh a specific screen, but will refresh the entire session and will result in a loss of any entered information.

#### Right Click Pop-up Menus

Right clicking on an element opens the pop-up menu for that specific element. For example, right clicking on the Sites element in the Equipment Registry perspective opens the pop-up menu that has options such as: **Add**, **Modify**, **Delete**, List and Refresh. Right clicking on the Sites element in the Mediation perspective opens the pop-up menu just shows Refresh.

#### Column Functions

The column functions enable you to perform the following actions:  
Each column can be sorted by ascending or descending order

Each column can be moved to a different order within the screen to facilitate reading and searching for specific records. This action is accomplished through the Select Columns button.

**Note:** The Select Columns button also enables you to view or hide columns on a screen.



## Chapter 4: Home Screen Operations

---

### About CCM Home Page Operations

One of the perspectives that CCM provides is a global listing functionality on its Home screen. These links enable you to view the objects listed below as you would view them using the NSP legacy application system configuration. In addition to these views, there are also Bulk Load and Reports functionalities. The areas covered in this chapter are:

- Network Elements
- Network Views
- xDR-Related Elements
- Bulk Load (Import and Export)
- Reports (Creating a Configuration Report)
- Thirdparty (Linking with external applications)
- Alarm Severity Configuration

### Network Elements

The CCM Home screen provides links for a global listing of the following SS7, GPRS and IP network elements:

- SS7 Nodes
- GPRS Nodes
- IP Nodes
- SS7 Signaling Points
- SS7 Linksets
- SS7 Links
- GPRS Signaling Points
- GPRS Gb Links
- IP Signaling Points

### Nodes

The Home page lists each type of node separately to make searches easier and quicker. Clicking a specific link provides a list of the specific node configured in your system along with their associated signaling points. Clicking the link opens the specific Node(s) List screen (SS7 Nodes list page is shown).

**Note:** The Home screen section shows the list of Nodes independently of the Object Tree on the left-hand section of the screen.

Figure 8 consists of two screenshots of the SS7 Node(s) List screen. The top screenshot shows a list of 25 nodes with columns: #, Node Name, Description of Node, Owner, State, and Created. The bottom screenshot shows a list for Node sp\_66-67-47-401 with columns: #, SP, Description, Node Name, Code, Flavour Country, Flavour Format, and OID.

Figure 8: SS7 Node(s) List Screen

From this screen you can: add, modify, delete and show details of any selected Node as well as refreshing the screen to view any changes that have occurred to the Node records.

### Signaling Points List Screen

Each type of signaling point is located under the network element category (SS7, GPRS or IP). The signaling points link provides a list of ALL the signaling points configured in your system. Clicking the link opens the Signaling Point(s) List screen (SS7 Signaling Points screen shown).

**Note:** The Home screen section shows the list of Signaling Points independently of the Object Tree on the left-hand section of the screen.

Figure 9: SS7 Signaling Points List Screen

Figure 9 shows a list of 26 signaling points with columns: #, SP, Description, Node Name, Code, Flavour Country, Flavour Format, and OID.

### SS7 Linksets List Screen

The linksets link provides a list of all the SS7 linksets configured in your system. Clicking on SS7 Linksets in the Home page opens the SS7LinksetList screen shown below that has two tables. Selecting a linkset in the top (linkset) table shows the links that belong to that set. From this screen you can modify, delete, search, override custom name, assign RID groups and see details of a linkset. You can also: add, modify, delete, search, override custom name and see details of a linkset's associated links.

Figure 10 displays two tables. The top table lists SS7 linksets with columns: #, Linkset Custom Name, Custom Name Override, Eagle Name, Description, RID Group Id, Linkset Type, and Near. The bottom table shows associated links with columns: #, Link Custom Name, Eagle Name, Description, SLC, Interface Name, Protocol Name, Association Name, and R.

Figure 10: Selected SS7 Linkset List Showing Associated Links

### SS7 Links List Screen

The links link provides a list of all the SS7 links configured in your system. Clicking the link opens the Link List screen. From this screen you can: modify, delete, search, set the custom name override or see the details of a particular link.

**Note:** The Home screen section shows the list of Link independently of the Object Tree on the left-hand section of the screen.

Figure 11 shows a table with columns: #, Link Custom Name, Custom Name Override, Eagle Name, Description, and Linkset Custom Name. The table lists various SS7 links with their respective details.

Figure 11: SS7 Links List Screen

### GPRS Signaling Point List Screen

The GPRS signaling point list screen provides a list of GPRS linksets configured in your system. The GPRS linkset screen is shown below.

Figure 12 shows a table with columns: #, SP, Description, Node Name, SGSN Id, Oid, Owner, State, and Created. The table lists GPRS signaling points with their details.

Figure 12: Gprs Signaling Point List Screen

### GPRS Gb Link List Screen

The GPRS Gb links list screen provides a list of the GPRS Gb links configured in your system. The GPRS Gb link list screen is shown below.

Figure 13 shows a table with columns: #, Link Custom Name, Description, Pcm Id, Link Interface, Sp, and Oid. The table lists GPRS Gb links with their details.

Figure 13: Gprs Gb Link List Screen

### IP Signaling Point List Screen

The IP signaling point list screen provides a list of IP signaling points configured in your system. The IP signaling point list screen is shown below.

									25		Page: 1/1 Records: 0
<input type="checkbox"/>	#	SP	Description	Node Name	IP Id	OID	Owner	State	Created		

Figure 14: IP Signaling Point List Screen

## Network View Lists

The CCM Home screen provides links for a global listing of the following network views:

- Session Views
- Link Views

These links provide a complete list of these elements.

### Session Views

The Network Session Views link provides a list of ALL the session views configured in your system. Clicking the link opens the Network Session View(s) List screen.

**Note:** In the Home screen, the Network Sessions View section shows the list of Network Views independently of the Object Tree on the left-hand section of the screen.

									45		Page: 1/1 Records: 3
<input type="checkbox"/>	#	Name	Type	Description							
<input type="checkbox"/>	1	Auto_sv_1	sessionnetworkview								
<input type="checkbox"/>	2	D_session_view	sessionnetworkview								
<input type="checkbox"/>	3	hk_nv	sessionnetworkview								

Figure 15: Network Sessions View(s) List Screen

### Link Views

The Link Views link provides a list of all the link network views configured in your system. Clicking the link opens the Link Network View(s) List screen.

**Note:** In the Home screen, the Link Views section shows the list of Link Views independently of the Object Tree on the left-hand section of the screen.

									45		Page: 1/1 Records: 2
<input type="checkbox"/>	#	Name	Type	Description							
<input type="checkbox"/>	1	Y_LV	linknetworkview								
<input type="checkbox"/>	2	Y_link	linknetworkview								

Figure 16: Link Network View(s) List Screen

## xDR-Related Elements

The CCM Home screen provides links for a global listing of the following xDR-related elements:


- xDR Sessions
- Dictionaries
- PDU Hiding

These links provide a complete list of these elements. Each element is discussed separately.

### xDR Sessions

The xDR sessions link provides a list of ALL the xDR sessions configured in your system. Clicking the link opens the Sessions present.

**Note:** The Home screen section shows the list of Sessions independently of the Object Tree on the left-hand section of the screen.

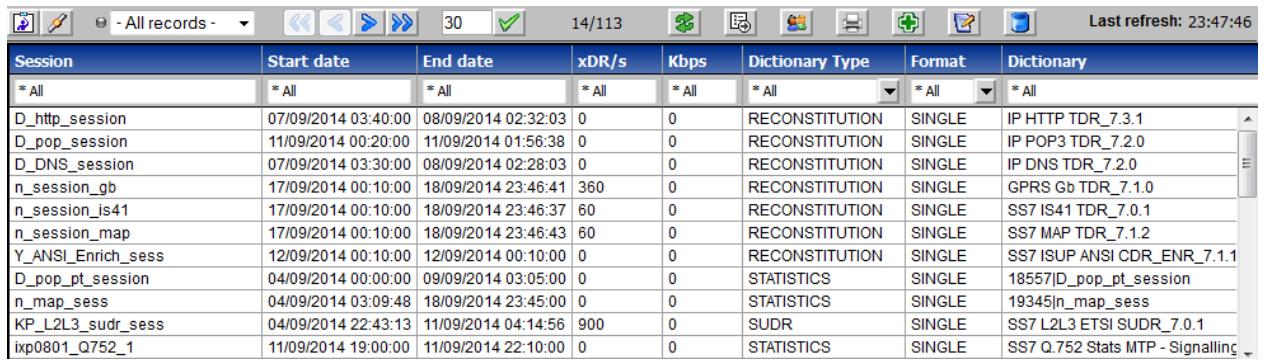


Session	Start date	End date	xDR/s	Kbps	Dictionary Type	Format	Dictionary
* All	* All	* All	* All	* All	* All	* All	* All
D_http_session	07/09/2014 03:40:00	08/09/2014 02:32:03	0	0	RECONSTITUTION	SINGLE	IP HTTP TDR_7.3.1
D_pop_session	11/09/2014 00:20:00	11/09/2014 01:56:38	0	0	RECONSTITUTION	SINGLE	IP POP3 TDR_7.2.0
D_DNS_session	07/09/2014 03:30:00	08/09/2014 02:28:03	0	0	RECONSTITUTION	SINGLE	IP DNS TDR_7.2.0
n_session_gb	17/09/2014 00:10:00	18/09/2014 23:46:41	360	0	RECONSTITUTION	SINGLE	GPRS Gb TDR_7.1.0
n_session_is41	17/09/2014 00:10:00	18/09/2014 23:46:37	60	0	RECONSTITUTION	SINGLE	SS7 IS41 TDR_7.0.1
n_session_map	17/09/2014 00:10:00	18/09/2014 23:46:43	60	0	RECONSTITUTION	SINGLE	SS7 MAP TDR_7.1.2
Y_ANSI_Enrich_sess	12/09/2014 00:10:00	12/09/2014 00:10:00	0	0	RECONSTITUTION	SINGLE	SS7 ISUP ANSI CDR_ENR_7.1.1
D_pop_pt_session	04/09/2014 00:00:00	09/09/2014 03:05:00	0	0	STATISTICS	SINGLE	18557 D_pop_pt_session
n_map_sess	04/09/2014 03:09:48	18/09/2014 23:45:00	0	0	STATISTICS	SINGLE	19345 n_map_sess
KP_L2L3_sudr_sess	04/09/2014 22:43:13	11/09/2014 04:14:56	900	0	SUDR	SINGLE	SS7 L2L3 ETSI SUDR_7.0.1
ixp0801_Q752_1	11/09/2014 19:00:00	11/09/2014 22:10:00	0	0	STATISTICS	SINGLE	SS7 Q.752 Stats MTP - Signalling

Figure 17: xDR Sessions List Screen

## Dictionaries

The Dictionaries link provides a list of all the dictionaries discovered in your system. Clicking the link opens the Dictionaries list screen.

**Note:** The Home screen section shows the list of dictionaries independently of the Object Tree on the left-hand section of the screen.

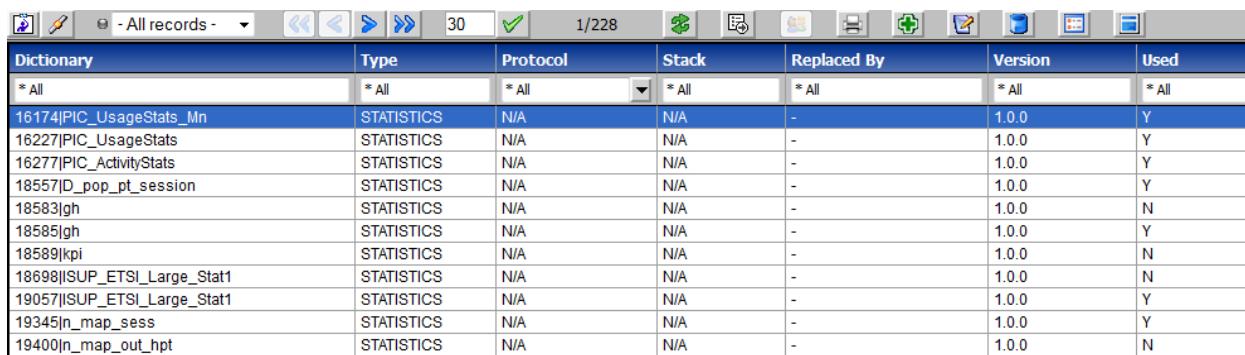

Dictionary	Type	Protocol	Stack	Replaced By	Version	Used
* All	* All	* All	* All	* All	* All	* All
16174 PIC_UsageStats_Mn	STATISTICS	N/A	N/A	-	1.0.0	Y
16227 PIC_UsageStats	STATISTICS	N/A	N/A	-	1.0.0	Y
16277 PIC_ActivityStats	STATISTICS	N/A	N/A	-	1.0.0	Y
18557 D_pop_pt_session	STATISTICS	N/A	N/A	-	1.0.0	Y
18583 gh	STATISTICS	N/A	N/A	-	1.0.0	N
18585 gh	STATISTICS	N/A	N/A	-	1.0.0	Y
18589 kpi	STATISTICS	N/A	N/A	-	1.0.0	N
18698 ISUP_ETS1_Large_Stat1	STATISTICS	N/A	N/A	-	1.0.0	N
19057 ISUP_ETS1_Large_Stat1	STATISTICS	N/A	N/A	-	1.0.0	Y
19345 n_map_sess	STATISTICS	N/A	N/A	-	1.0.0	Y
19400 n_map_out_hpt	STATISTICS	N/A	N/A	-	1.0.0	N

Figure 18: Dictionaries Present Screen

## PDU Hiding

The Stacks link provides a list of all the stacks in your system. Clicking the link opens the Stacks list screen.

**Note:** The Home screen section shows the PDU Hiding option. This option provides the ability to enable or disable the PDU decode hiding and PDU summary hiding for a specific protocol. Enabling PDU hiding will take away the ability to view the hexadecimal values (header of the decoding) and columns 1, 3 and 4 in the decode screen in ProTrace.

### Enabling or Disabling PDU Hiding

Complete these steps to enable or disable PDU hiding in ProTrace.

**Note:** This operation can only be performed by users with the role NSPAdministrator or NSPConfigManager.

- From the Home Page, click **PDU Hiding**.  
The *PDU Hiding* screen opens. The default setting is "enabled."
- Select either **Enable PDU Hiding** or **Disable PDU Hiding** depending on the need.
- Click **Apply** at the bottom of the screen.  
The heading will signify what state the PDU hiding is in (enabled or disabled).
- Click **Close**.

## Bulk Load

CCM's Bulk Load process enables you to load both IMF and PMF configurations offline without requiring xMF to be up and running. For IMF configurations this process includes the capability to import sites, hosts, applications, signaling points (both SS7 and Gb), linksets, links (both SS7 and Gb), SS7 filters, IP filters, probe assignment configurations and monitoring groups.

After importing the configuration for the first time, you can also update the same configurations again. You take the export of the existing configuration and make the changes to this configuration in the CSV files generated. Re-importing the files updates the changes made to the files.

**Note:** To create a new object, the ObjectIDs will be "NA". This will signify whether it is a new insert or not. To update an object, the ObjectID should be NSP\_ID (this can be generated through CSV export).

The bulk loading process supports the following file types:

- SSN filters
- SS7 combination filters
- GT filters
- DLCI filters
- IP Combination Filters
- IP filters
- Port filters
- VLAN filters
- PC filters
- Raw filters
- Sites
- Hosts
- Nodes
- SS7 Signaling Points
- Linksets
- SS7 Links
- Gb Signaling Points
- Monitoring Groups
- PMF cards
- PMF ports
- PMF Port Assignments

These file types can be uploaded in any order.

## Bulk Loading Process

The separate files should be prepared for the file formats specified in the next sections. If some configuration already exists in the system, (for example, Sites added from the CCM Add Site screen), then the Bulk load of the corresponding .csv file can be skipped. While preparing the .csv files for initial import, the Object ID fields should be set to NA value (for example, the SiteID field in Sites.csv or the HostID fields in Hosts.csv are set to NA). Finally, during the Bulk Load Process, files can be uploaded in any order but all dependent files should be imported together (for example, Hosts.csv and Sites.csv should be uploaded together).

### IMF Element Configurations

These tables show the basic IMF element configurations needed when importing IMF configurations using the bulk load operations.

**Note:** All these csv files must exist and must be imported so that the import process is error free.

ID	Field	Data Type	Value	Optional	Can Be Updated	Max Length
1	Bulk Load		1		No	
2	Site ID	Number			No	
3	Name	String			Yes	30
4	Description	String		Yes	Yes	255

TABLE 1: SITE CONFIGURATION

ID	Field	Data Type	Value	Optional	Can Be Updated	Max Length
1	Bulk Load Type		2		No	
2	Host ID	String			No	
3	Host Name	String			Yes	30
4	Description	String		Yes	Yes	255
5	Frame	Number			Yes	
6	Position	Number			Yes	
7	Admin IP Address	String			Yes	30
8	Application Name	String			No	30
9	Application Description	String		Yes	Yes	255
10	Application Type	String	IMF-NG PMF-NG		No	
11	Site Name-ID	String			No	30

TABLE 2: HOST CONFIGURATION

ID	Field	Data Type	Value	Optional	Can Be Updated	Max Length
1	Bulk Load Type		4		No	
2	SPID	Number			No	
3	SP Name	String			Yes	30
4	Description	String		Yes	Yes	255
5	Flavor ID	Number			No	
6	Point Code	Number			No	
7	CLLI	String			No	30
8	Node Name - ID	String			No	30
9	Site Name - ID	String			No	30

TABLE 3: SS7 SIGNALING POINT CONFIGURATION

ID	Field	Data Type	Value	Optional	Can Be Updated	Max Length
1	Bulk Load Type		5			
2	Linkset ID	Number			No	
3	Linkset Name	String			Yes	30
4	Description	String		Yes	Yes	255
5	Type	Char	A,B,C,D,E		Yes	
6	SP1 (Name/ID)	String			No	30
7	SP2 (Name/ID)	String			No	30
8	Resource ID Group				Yes	
9	Site Name/ID				No	30

**TABLE 4: LINKSET CONFIGURATION**

ID	Field	Data Type	Value	Optional	Can Be Updated	Max Length
1	Bulk Load		8			
2	Association ID	Number			No	
3	Association - Name	String			Yes	80
4	EagleID	Number			Yes	
5	SiteName-ID	String			No	30

**TABLE 5: ASSOCIATIONS CONFIGURATION**

ID	Field	Data Type	Value	Optional	Can Be Updated	Max Length
1	Bulk Load Type		6			
2	SS7LinkID	Number			No	
3	Name	String			No	30
4	Description	String		Yes	Yes	255
5	SLC	Number			Yes	
6	Interface	Number			Yes	
7	Transport Protocol	Number			Yes	
8	Eagle Card	String			No	
9	Eagle Port Number	Number			No	
10	Linkset Name - ID	String			No	30
11	SiteName - ID	String			No	30
12	EagleID	Number		Yes	Yes	

**TABLE 6: SS7 LINK CONFIGURATIONS**

ID	Field	Data Type	Value	Optional	Can Be Updated	Max Length
1	Bulk Load		7		No	
2	Monitoring GroupID					
3	Name	String			No	30
4	Description	String		Yes	Yes	255
5	Site Name-ID				No	30
6	Linkset Names-IDs		"comma separated Linkset Names/IDs under quotes"	Yes	Yes	
7	EagleID		"comma separated EagleIDs for associations under quotes"	Yes	Yes	

TABLE 7: MONITORING GROUP CONFIGURATION

***Sample of an IMF Configuration CSV File***

Here is an example of the .csv files that comprise an IMF configuration.

**Note:** ID is an NSP identifier for mobile entries. It is used in the update/delete process for existing entries through import feature. It can be left blank for new entries.

**Site csv file**

```
#Sites.csv,,,
#BulkLoadType,SiteID,SiteName,Description
1,NA,IMF_Delhi,Delhi Site
1,NA,IMF_Chennai,Chennai site
1,NA,IMF_Mumbai,Mumbai site
1,NA,IMF_Kolkata,Kolkatta site
```

**Host csv file**

```
#Hosts.csv,,,
#BulkLoadType,HostID,HostName,Description,Frame,Position,IP,AppName,Description,AppType,Site
2,NA,IMF-DE-1A,,1,1,172.31.254.5,IMF-DE-1A,IMF NG,IMF NG,IMF_Delhi
2,NA,IMF-DE-1B,test1,1,2,172.31.254.6,IMF-DE-1B,IMF NG,IMF NG,IMF_Delhi
2,NA,IMF-DE-1C,,1,3,172.31.254.7,IMF-DE-1C,IMF NG,IMF NG,IMF_Delhi
2,NA,IMF-DE-1F,,1,6,172.31.254.10,IMF-DE-1F,IMF NG,IMF NG,IMF_Delhi
```

**SS7SP csv file**

```
#SS7SPs.csv,,,
#BulkLoadType,SPID,SPName,Description,Flavor,PointCode,CLLI,NodeID,SiteID
4,NA,eagle_4-14-4-402,,402,8308,mumstp,,IMF_Mumbai
4,NA,eagle_4-14-5-402,,402,8309,kolstp,,IMF_Kolkata
4,NA,eagle_4-7-4-402,,402,8252,chnstp01,,IMF_Chennai
4,NA,eagle_8502-aa-405,,405,8502,kolstp,,IMF_Kolkata
4,NA,eagle_s-111-aa-405,,405,1073741935,delstp01,,IMF_Delhi
4,NA,eagle_s-222-aa-405,,405,1073742046,mumstp,,IMF_Mumbai
4,NA,eagle_s-444-aa-405,,405,1073742268,chnstp01,,IMF_Chennai
4,NA,sp_1-1-1-402,,402,2057,,,IMF_Chennai
4,NA,sp_1-1-1-402,,402,2057,,,IMF_Delhi
```

**Linksets csv file**

```
#Linksets.csv,,,
#BulkLoadType,LinkSetID,Name,Description>Type,NEPC,FEPC,ResourceID,Site
5,NA,delstp01-212,Delhi,A,sp_6921-aa-405,sp_9589-aa-405,54,IMF_Delhi
5,NA,delstp01-213,,A,sp_4-7-3-402,sp_2-174-7-402,1,IMF_Delhi
5,NA,delstp01-214,,A,sp_4-7-3-402,sp_4-40-0-402,1,IMF_Delhi
5,NA,delstp01-215,,A,sp_6921-aa-405,sp_9493-aa-405,22,IMF_Delhi
5,NA,delstp01-216,,A,sp_4-7-3-402,sp_2-72-3-402,1,IMF_Delhi
5,NA,delstp01-217,,A,sp_6921-aa-405,sp_5547-aa-405,72,IMF_Delhi
5,NA,delstp01-218,,A,sp_6921-aa-405,sp_9961-aa-405,63,IMF_Delhi
```

**Associations csv file**

```
8,NA,Association1,1,IMF_Mumbai
8,NA,Associaton2,2,IMF_Mumbai
```

**SS7 Links csv file**

```
#SS7Links.csv,,,
#BulkLoadType,LinkID,Name,Description,SLC,Interface,TransportProtocol,Eagle
Card,EaglePort,LinkSet,Site,
6,NA,mumstp-1211-30,,14,8,0,233413,239768,mumstp-9,IMF_Mumbai,1
6,NA,mumstp-1211-31,,15,8,0,233413,239772,mumstp-9,IMF_Mumbai,1
6,NA,mumstp-1211-24,,1,8,0,233413,233436,mumstp-9,IMF_Mumbai,1
6,NA,mumstp-1211-25,,0,8,0,233413,233438,mumstp-9,IMF_Mumbai,2
6,NA,mumstp-1211-26,,3,8,0,233413,233440,mumstp-9,IMF_Mumbai,2
```

### Monitoring Group csv file

```
#MonitoringGroups.csv,,,,,
#BulkLoadType, MGID, Name, Description, Site, Linksets, EagleIdsForAssociations
7, NA, MG1,, DUO,, 6
```

### Importing IMF Configurations

#### *Pre-conditions for importing IMF configurations*

1. NSP server is running.
2. You have logged into the NSP server and launched CCM.
3. You have created the necessary CSV files in the proper format.

Complete these steps when importing an IMF configuration.

1. Click **Bulk Import Configurations** on the Home Page.  
The Import Files screen opens.

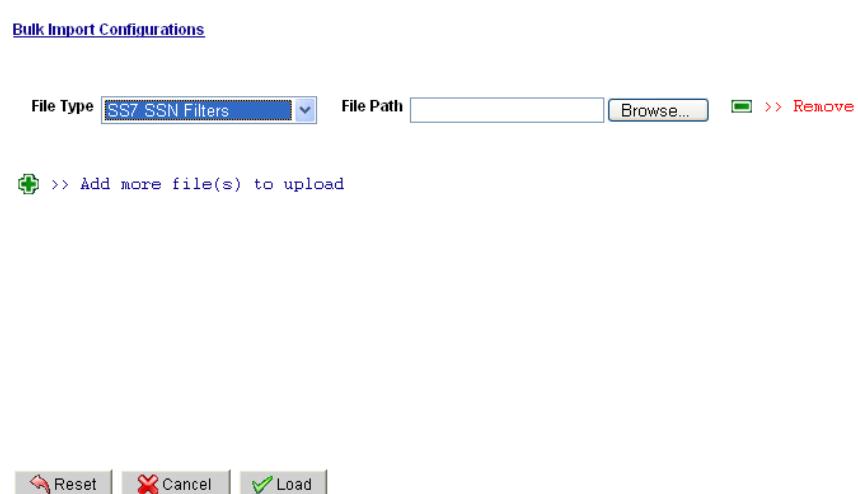


Figure 19: Bulk Load Import Screen

2. Select the **Sites** from the drop-down menu.
3. Click **Browse** in the first field.  
The Choose File screen opens.
4. Select the **Sites.csv**.
5. Click **Open**.  
The directory path with the file appears in the field.
6. Repeat steps 2-4 for the following files.

**Note:** You can import the files in any order and you do not have to import all files at one time.

**Note:** To add more files, click the plus (+) sign above the first file field.

- a. Hosts.csv
- b. SS7SP.csv
- c. Linksets.csv
- d. Associations.csv
- e. SS7 Links.csv
- f. MonitoringGroups.csv

7. Click **Load**.  
The files are uploaded to the system.

Once you have imported the files, you must **Synchronize** the Subsystem.

## PMF Element Configurations

These tables show the basic PMF element configurations needed when importing PMF subsystem configurations using the bulk load operations.

ID	Field	Data Type	Value	Optional	Can Be Updated	Max Length
1	Bulk Load		1		No	
2	Site ID	Number			No	
3	Name	String			Yes	30
4	Description	String		Yes	Yes	255

TABLE 8: SITE CONFIGURATION

ID	Field	Data Type	Value	Optional	Can Be Updated	Max Length
1	Bulk Load		2		No	
2	Host ID	String			No	
3	HostName	String			Yes	30
4	Description	String		Yes	Yes	255
5	Frame	Number			Yes	
6	Position	Number			Yes	
7	Admin IP Address	String			Yes	30
8	Application Name	String			No	30
9	Application Description	String		Yes	Yes	255
10	Application	String	IMF-NG PMF-NG		No	
11	Site Name-ID	String			No	30

TABLE 9: HOST CONFIGURATION

ID	Field	Data Type	Value	Optional	Can Be Updated	Max Length
1	Bulk Load		3			
2	NodeID	Number			No	
3	Name	String			Yes	80
4	Description	String		Yes	Yes	255
5		String	SS7, IP, GPRS		No	255

TABLE 10: NODE CONFIGURATION

ID	Field	Data Type	Value	Optional	Can Be Updated	Max Length
1	Bulk Load Type		4		No	
2	SPID	Number			No	
3	SP Name	String			Yes	30
4	Description	String		Yes	Yes	255
5	Flavor ID	Number			No	
6	Point Code	Number			No	
7	CLLI	String		Leave it blank for PMF	No	30
8	Node Name - ID	String			No	30
9	Site Name - ID	String		Leave it blank for PMF	No	30

TABLE 11: SS7 SIGNALING POINT CONFIGURATION

ID	Field	Data Type	Value	Optional	Can Be Updated	Max Length
1	Bulk Load Type		20		No	
2	SP ID	Number			No	
3	SP Name	String			Yes	30
4	Description	String		Yes	Yes	255
5	SGSN ID	Number			Yes	
6	NodeName - ID	String			No	30

TABLE 12: GB SIGNALING POINT CONFIGURATION

ID	Field	Data Type	Value	Optional	Can Be Updated	Max Length
1	Bulk Load Type		5			
2	Linkset ID	Number			No	
3	Linkset Name	String			Yes	30
4	Description	String		Yes	Yes	255
5	Type	Char	A,B,C,D,E		Yes	
6	SP1 (Name/ID)	String			No	30

ID	Field	Data Type	Value	Optional	Can Be Updated	Max Length
7	SP2 (Name/ID)	String			No	30
8	Resource ID Group				Yes	
9	Site Name/ID				No	30

TABLE 13: LINKSET CONFIGURATION

ID	Field	Data Type	Value	Optional	Can Be Updated	Max Length
1	Bulk Load Type		6			
2	Link ID	Number			No	
3	Name	String			No	30
4	Description	String		Yes	Yes	255
5	SLC	Number			Yes	
6	Interface	Number			Yes	
7	Transport Protocol	Number			Yes	
8	Eagle Card	String		Leave it blank for PMF	No	
9	Eagle Port Number	Number		Leave it blank for PMF	No	
10	Linkset Name/ID	String			No	30
11	Site Name/ID	String			No	30
12	EagleID	Number		Leave it blank for PMF	No	

TABLE 14: SS7 LINK CONFIGURATION

ID	Field	Data Type	Value	Optional	Can Be Updated	Max Length
1	Bulk Load		21			
2	LinkID	Number			No	
3	Name	String			No	30
4	Description	String		Yes	Yes	255
5	PCM ID	Number			Yes	
6	Interface	Number			Yes	
7	SP Name/ID	Number			Yes	30

TABLE 15: GB LINK CONFIGURATIONS

ID	Field	Data Type	Value	Optional	Can Be Updated	Max Length
1	Bulk Load		11		No	
2	CardID	Number			No	
3	Slot Number	Number			No	
4	Hardware Type	Number	0-SPAN (E1/T1)		No	
5	Software Type	Number	1-SS7-T1 2-SS7-E1 19-Gb-T1 20-Gb-E1		Yes	
6	Admin State	Number	0-Disable 1-Enable		Yes	
7	Name/ID	String			No	30

TABLE 16: PMF CARD CONFIGURATION

ID	Field	Data Type	Value	Optional	Can Be Updated	Max Length
1	Bulk Load		12			
2	Port Number	Number	0-7		No	
3	Zero Spresion	Number	7--B8ZS 6--AMI 5- -HDB3		Yes	
4	Framing	Number	11- -SF 12- -ESF 9--CRC4_DF 8--CRC4 MMF		Yes	
5	Access Mode	Number	18-Auto Config 16- Long Haul 17- Monitor 15-Short Haul		Yes	
6	Bit Inversion	Number	0 – On 1 – Off		No	
7	Host Name/ID	String			No	30
8	Stot Number					

TABLE 17: PMF PORT CONFIGURATION

ID	Field	Data Type	Possible Values	Optional	Can Be Updated	Max Length
1	Bulk Load		13			
2	HostName/ID				No	30
3	Card Slot Number				No	
4	Port Number	Number			No	
5	Channel Number	Number	1-32:E1 1-24:T1		Yes	
6	Number of Channels	Number	0- Disable 1- Enable	Yes (In case of SS7 Link)	No	

ID	Field	Data Type	Possible Values	Optional	Can Be Updated	Max Length
7	Name/ID	String		No	Yes	30

TABLE 18: PMF PORT ASSIGNMENT CONFIGURATION

***Sample of CSV Formatted PMF File***

These are examples of .csv files that make up a PMF configuration.

**Note:** Files can be loaded in any order. Files do not have to be loaded at one time.

**Sites csv file**

```
1,NA,IMF-Quattro
1,NA,Demo1
1,NA,ixp2627
1,NA,IMF-DUO
1,NA,ML350-0A
1,NA,Prithvi-1A
1,NA,ixp0123
1,NA,DL380-1A
```

**Hosts csv file**

```
#Hosts.csv,,,
#BulkLoadType,HostID,HostName,Description,Frame,Position,IP,AppName,Description,AppType,Site
2,NA,IMF-DE-1A,,1,1,172.31.254.5,IMF-DE-1A,IMF NG,IMF NG,IMF Delhi
2,NA,IMF-DE-1B,test1,1,2,172.31.254.6,IMF-DE-1B,IMF NG,IMF NG,IMF Delhi
2,NA,IMF-DE-1C,,1,3,172.31.254.7,IMF-DE-1C,IMF NG,IMF NG,IMF Delhi
```

**Nodes csv file**

```
#Nodes.csv,,,
#BulkLoadType,NodeID,NodeName,Description,Type
3,NA,TestGPRSNode,TestGPRSNode,GPRS
```

**SS7SP csv file**

```
4,NA,SP_1,,402,14428
4,NA,SP_13,,402,14440
4,NA,SP_161,,402,14488
4,NA,SP_165,,402,14492
4,NA,SP_169,,402,14496
4,NA,SP_17,,402,14444
```

**Linkset csv file**

```
5,NA,ls_PMF_1,1,A,SP_1,SP_161,1
5,NA,ls_PMF_5,5,A,SP_5,SP_165,2
5,NA,ls_PMF_9,9,A,SP_9,SP_169,1
5,NA,ls_PMF_13,13,A,SP_13,SP_173,2
5,NA,ls_PMF_17,17,A,SP_17,SP_177,1
5,NA,ls_PMF_21,17,A,SP_21,SP_181,2
```

**SS7 Links csv file**

```
6,NA,link_Card1_Port6_7,,6,8,0,,,ls_PMF_408
6,NA,link_Card1_Port6_8,,7,8,0,,,ls_PMF_408
6,NA,link_Card1_Port7_1,,0,8,0,,,ls_PMF_412
6,NA,link_Card1_Port7_2,,1,8,0,,,ls_PMF_412
```

**GBSP csv file (not shown in this example)****GB Link csv file (not shown not shown in this example)****PMF Card csv file**

```
11,NA,2,0,2,1,ML350-0A
11,NA,3,0,2,1,ML350-0A
11,NA,7,0,2,1,ML350-0A
11,NA,8,0,2,1,ML350-0A
11,NA,1,0,2,1,ML350-0A
```

**PMF Ports csv file**

```
12,0,5,9,18,0,ML350-0A,2
12,1,5,9,18,0,ML350-0A,2
12,2,5,9,18,0,ML350-0A,2
```

```
12,3,5,9,18,0,ML350-0A,2
12,4,5,9,18,0,ML350-0A,2
PMF Link Assignment csv file
13,ML350-0A,1,0,1,,link_Card1_Port0_1
13,ML350-0A,1,0,2,,link_Card1_Port0_2
13,ML350-0A,1,0,3,,link_Card1_Port0_3
13,ML350-0A,1,0,4,,link_Card1_Port0_4
13,ML350-0A,1,0,5,,link_Card1_Port0_5
13,ML350-0A,1,0,6,,link_Card1_Port0_6
13,ML350-0A,1,0,7,,link_Card1_Port0_7
13,ML350-0A,1,0,8,,link_Card1_Port0_8
```


## Importing PMF Configurations

### *Pre-conditions for importing PMF configurations*

1. NSP server is running.
2. You have logged into the NSP server and launched CCM.
3. You have created the necessary CSV files in the proper format.

Complete these steps when importing an PMF configuration.

1. Click **Bulk Import Configurations** on the Home Page.  
The *Import Files* screen opens.

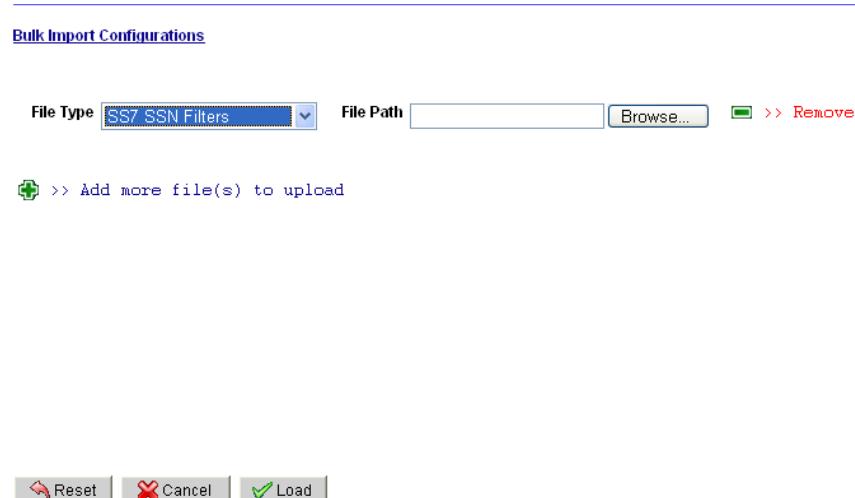

**Bulk Import Configurations**

File Type **SS7 SSN Filters** File Path  **Browse...** **Remove**

**+ >> Add more file(s) to upload**

**Reset** **Cancel** **Load**

**Figure 20: Bulk Load Import Screen**

2. Select the **Sites** from the drop-down menu.
3. Click **Browse** in the first field.  
The *Choose File* screen opens.
4. Select the **Sites.csv**.
5. Click **Open**.  
The directory path with the file appears in the field.
6. Repeat steps 2-4 for the following files.

**Note:** You can import the files in any order and you do not have to import all files at one time.

**Note:** To add more files, click the plus (+) sign above the first file field.

- a. Hosts.csv
- b. Nodes.csv
- c. SS7SPs.csv
- d. GbSPs.csv
- e. GB Links.csv
- f. PMFCards.csv

- g. PMFPorts.csv
- h. PMFPortsAssignments.csv

7. Click **Load**.

The files are uploaded to the system.

Once you have imported the files, you must **Synchronize** the Subsystem.

### PDU Filter Configurations

These tables show the basic PDU filter configurations needed when importing PDU filters using the bulk import operations.

ID	Field	Data Type	Value	Optional	Can Be Updated
1	Bulk Load Type		30		No
2	Object ID	Number			No
3	Name	String			Yes
4	Description	String		Yes	Yes
5	Type	String	Calling, Called, Both		Yes
6	SSN List	String			Yes

TABLE 19: SSN FILTER CONFIGURATION

ID	Field	Data Type	Value	Optional	Can Be Updated
1	Bulk Load Type		31		No
2	Object ID	Number			No
3	Name	String			Yes
4	Description	String		Yes	Yes
5	Type	String	OPC, DPC, Both		Yes
6	Flavor	String	ANSI-SS7, etc.		
7	PC List	String			Yes

TABLE 20: PC FILTER CONFIGURATION

ID	Field	Data Type	Value	Optional	Can Be Updated
1	Bulk Load Type		32		No
2	Object ID	Number			No
3	Name	String			Yes
4	Description	String		Yes	Yes
5	Type	String	Calling, Called, Both		Yes

ID	Field	Data Type	Value	Optional	Can Be Updated
6	GT List	String			Yes

TABLE 21: GT FILTER CONFIGURATION

ID	Field	Data Type	Value	Optional	Can Be Updated
1	Bulk Load Type		34		No
2	Object ID	Number			No
3	Name	String			Yes
4	Description	String		Yes	Yes
5	Expression	String			Yes

TABLE 22: RAW FILTER CONFIGURATION

ID	Field	Data Type	Value	Optional	Can Be Updated
1	Bulk Load Type		33		No
2	Object ID	Number			No
3	Name	String			Yes
4	Description	String		Yes	Yes
5	Expression	String			Yes

TABLE 23: SS7 COMBO FILTER CONFIGURATION

## Importing PDU Filters

### *Pre-conditions for importing PDU filters*

1. NSP server is running.
2. You have logged into the NSP server and launched CCM.
3. You have created the necessary CSV files in the proper format.
4. A log entry exists in the Audit Viewer application.

Complete these steps when importing an PDU Filters.

1. Click **Bulk Import Configurations** on the Home Page.  
The Import Files screen opens.
2. Click **Browse** in the first field.  
The Choose File screen opens.

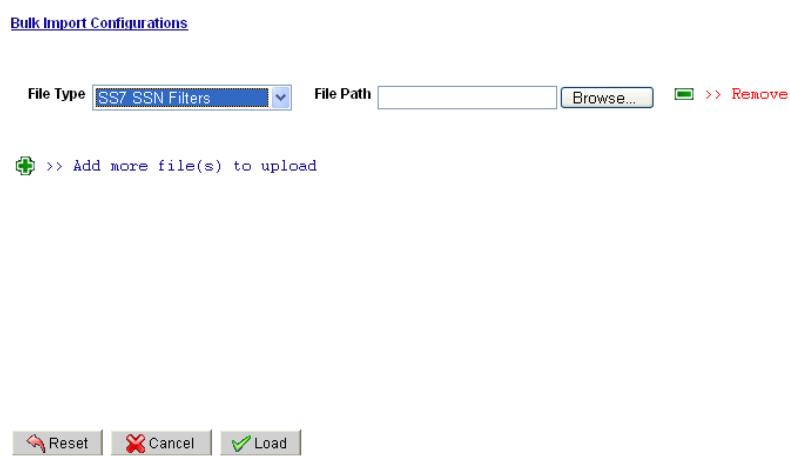


Figure 21: Browse Screen

3. Select the **SSN.csv**.
4. Click **Open**.  
The directory path with the file appears in the field.
5. Repeat steps 2-4 for the following files.

**Note:** You can import the files in any order and you do not have to import all files at one time.

**Note:** To add more files, click the plus (+) sign above the first file field.

- a. PCFilters.csv
- b. GTFilters.csv
- c. RawFilters.csv
- d. SS7ComboFilters.csv

6. Click **Load**.  
The files are uploaded to the system.

Once you have imported the files, you must **Synchronize** the Subsystem.

### PMF IP Filter Configurations

These tables show the basic PMF IP filter configurations needed when importing PMF IP filters using the bulk import operations.

ID	Field	Data Type	Value	Optional	Can Be Updated
1	Bulk Load		37		No
2	Object ID	Number			No
3	Name	String			Yes
4	Description	String		Yes	Yes
	Location	String	Source Destination		
5	Address Type	String	Host Address, Network Address		Yes

TABLE 24: IP ADDRESS FILTER CONFIGURATION

ID	Field	Data Type	Value	Optional	Can Be Updated
1	Bulk Load		36		No

ID	Field	Data Type	Value	Optional	Can Be Updated
2	Object ID	Number			No
3	Name	String			Yes
4	Description	String		Yes	Yes
5		String	Source Destination		Yes
6	Selected Ports	String	All, Even, Odd		Yes
7	Ports List	String			Yes

TABLE 25: IP PORT FILTER CONFIGURATION

ID	Field	Data Type	Value	Optional	Can Be Updated
1	Bulk Load Type		35		No
2	Object ID	Number			No
3	Name	String			Yes
4	Description	String		Yes	Yes
5	VLAN List	String			Yes

TABLE 26: VLAN FILTER CONFIGURATION

ID	Field	Data Type	Value	Optional	Can Be Updated
1	Bulk Load		38		No
2	Object ID	Number			No
3	Name	String			Yes
4	Description	String		Yes	Yes
5	Expression	String			Yes

TABLE 27: IP COMBO FILTER CONFIGURATION

## Importing PMF IP Filters

### ***Pre-conditions for importing PMF IP filters***

1. NSP server is running.
2. You have logged into the NSP server and launched CCM.
3. You have created the necessary CSV files in the proper format.

Complete these steps when importing PMF IP Filters.

1. Click **Bulk Import Configurations** on the Home Page.  
The Import Files screen opens.
2. Click **Browse** in the first field.  
The *Choose File* screen opens.

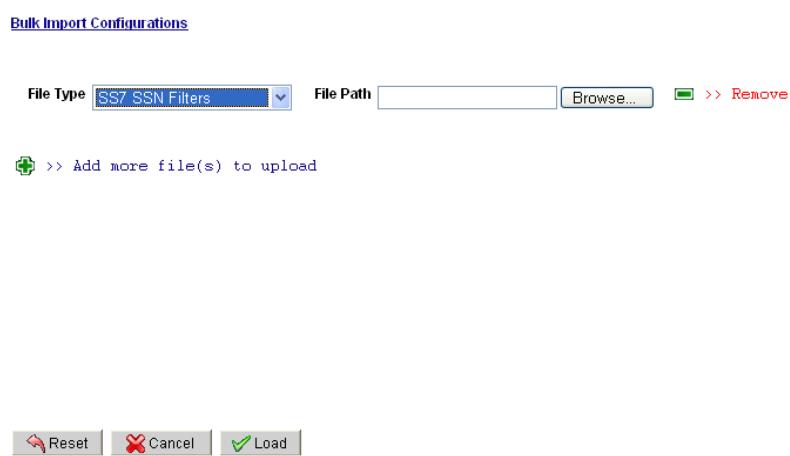


Figure 22: Browse Screen

3. Select the **IPFilters.csv**.
4. Click **Open**.  
The directory path with the file appears in the field.
5. Repeat steps 2-4 for the following files.

**Note:** You can import the files in any order and you do not have to import all files at one time.

**Note:** To add more files, click the plus (+) sign above the first file field.

- a. PortFilters.csv
- b. VLANFilters.csv
- c. ComboFilters.csv

6. Click **Load**.  
The files are uploaded to the system.

Once you have imported the files, you must Synchronize the Subsystem.

### PMF GB Filter Configuration

This table shows the basic PMF GB filter configuration, (DLCI Filter), needed when importing GB filters using the bulk import process along with an example of a DLCI Filter.

ID	Field	Data Type	Value	Optional	Can Be Updated
1	Bulk Load		39		No
2	Object ID	Number			No
3	Name	String			Yes
4	Description	String		Yes	Yes
	Selected DLCI Numbers	String	INCLUDE EXCLUDE		Yes
6	DLCI List	String			Yes

TABLE 28: DLCI FILTER CONFIGURATION

Bulk Load	FieldID	Name	Description		DLCI List
39	NA	DLCI_Test_2	test	INCLUDE	8
39	NA	DLCI_Test_1	test	EXCLUDE	2,4

TABLE 29: DCLI.CSV FILE

## Importing PMF GB Filters

### ***Pre-conditions for importing PMF GB filters***

1. NSP server is running.
2. You have logged into the NSP server and launched CCM.
3. You have created the necessary CSV files in the proper format.

Complete these steps when importing an PMF GB Filters:

1. Click **Bulk Import Configurations** on the Home Page.  
The *Import Files* screen opens.
2. Click **Browse** in the first field.  
The *Choose File* screen opens.

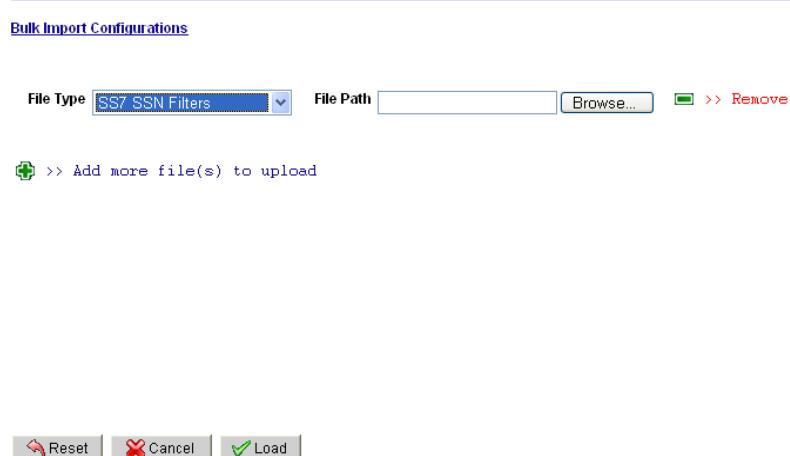


Figure 23: Browse Screen

3. Select the **DLCIFilters.csv**.
4. Click **Open**.  
The directory path with the file appears in the field.
5. Click **Load**.  
The files are uploaded to the system.

Once you have imported the files, you must resynchronize the subsystem.

## Exporting Bulk Load Configurations

The Home page screen contains a Bulk Export Configurations function that is used to update your configurations using csv formatted files. You use this function for uploading the following configurations:

- Sites
- Hosts
- Applications (Only for IMF and PMF)
- SS7 Network Elements
- Gb Network Elements
- IMF Linkset Assignments
- PMF Link Assignments
- SS7 PDU filters
- IP Filters

If you are not on the Home page complete the following steps. If you are on the Home page skip step 1.

1. From the Home menu, select **Home Page**  
The *Home Page* screen opens.
2. Click **Bulk Export Configurations**  
The *Bulk Export* Prompt appears.

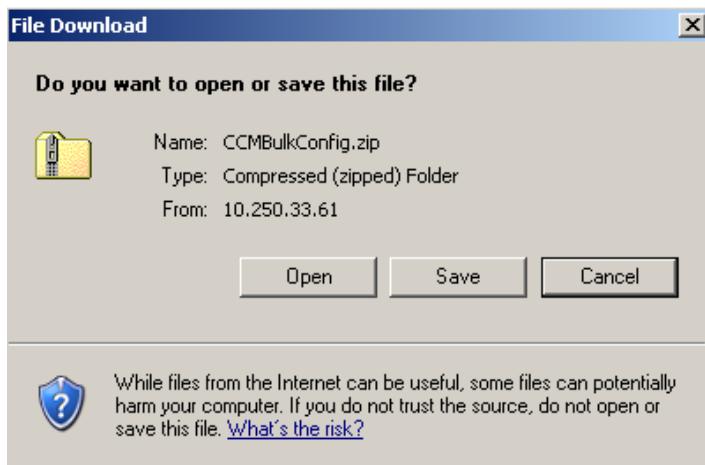


Figure 24: Bulk Export Configurations Prompt

At this step you can either save the zip file or open it to extract the files you want to use. To begin the extract process, complete the next step.

3. Click **Open**.  
The zip extract screen opens.

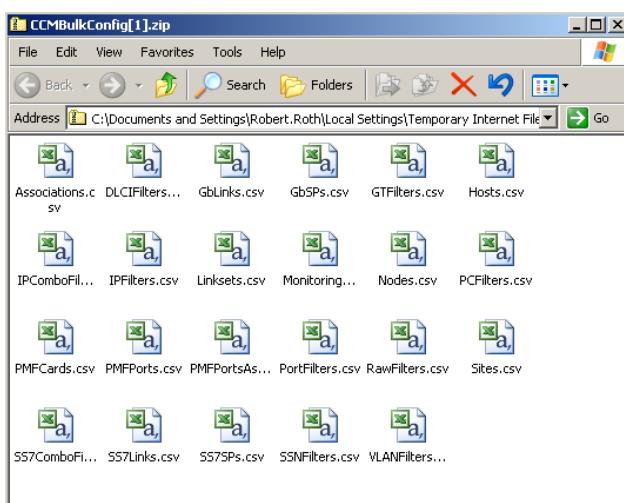


Figure 25: Bulk Export Configurations Prompt

At this stage, you can extract any of the files needed.

## Creating a Configuration Report

The CCM Home page also provides a Create Configuration Report feature that produces a report in MS Excel format. This report provides a spreadsheet (as a tab in the spreadsheet) for each element that is configured in your PIC system as well as ProTraq and ProAlarm applications.

Selecting the **Create Configuration Report** option initiates a prompt shown below.

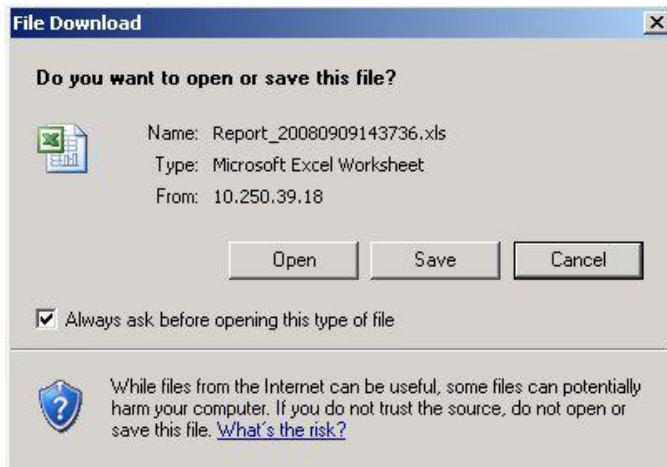


Figure 26: Open/Save Prompt For Configuration Report

You can either open the report (see below) or save the report to a local directory. When you open the report a spreadsheet opens shown in the figure below.

	B	C	D	E	F	G	H	I	J	K	L
1	IAS System Overview 2008/10/01 18:11:35										
2	Session	DWH	Mediation System	Store Dataflow	Operate Dataflow	Build Dataflow	XDR Builder	Acquisition	PI	...	
5	lsp5001StreamMonitor	lsp5001-1a(10.250.39.26)	test_06	StreamMonitor							
6	lsp5001BuildMonitor	lsp5001-1a(10.250.39.26)	test_06	BuildMonitor							
7	lsp5001OperateMonitor	lsp5001-1a(10.250.39.26)	lsp5001-1a(10.250.39.26)	test_06	OperateMonitor						
8	lsp5001StoreMonitor	lsp5001-1a(10.250.39.26)	lsp5001-1a(10.250.39.26)	test_06	StoreMonitor						
9	Morrisville_ISUP	1a(10.250.39.26)	1a(10.250.39.26)	test_06	S_Morrisville_ISUP		SS7 ISUP ANS CDR reconstitution			Morrisville_XMF	
10	SessionName	1a(10.250.39.26)	1a(10.250.39.26)	lsp5001-1a(10.250.39.26)							
11	cja1	1a(10.250.39.26)	1a(10.250.39.26)	test_06	cja_S	Sample_xdr_dataflow	SS7 AIN TDR capture				
12	pr_session	1a(10.250.39.26)	1a(10.250.39.26)	test_06	S_pr_session	pr_build	SS7 ISUP ANS CDR reconstitution				
13	ISUP_Session	1a(10.250.39.26)	1a(10.250.39.26)	lsp5001-1a(10.250.39.26)							
14											
15											


Figure 27: Sample Report

At this point you can select each tab and see information on each element in the system.

## Configure alarm severity offset

The View/Configure Severity offset link provides a list of all the alarm specific problems present in your system. It allows to override incoming alarm severity according its specific problem. This mechanism is applied at listening time when each alarm event is received.

**Note:** The Home screen section shows the list of Alarm Specific Problems independently of the Object Tree on the left-hand section of the screen.

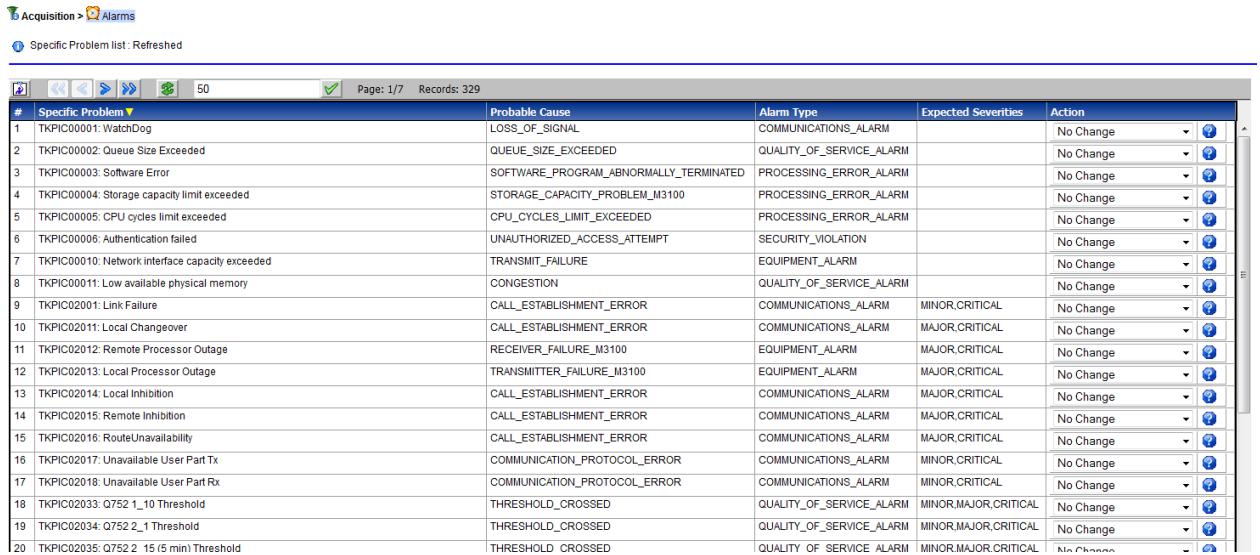

The screenshot shows a table with columns: #, Specific Problem, Probable Cause, Alarm Type, Expected Severities, and Action. The table lists 20 specific problems, each with a unique ID (TKPIC00001 to TKPIC02035) and a corresponding probable cause and alarm type. The 'Action' column contains dropdown menus and checkboxes for modifying the offset settings.

#	Specific Problem	Probable Cause	Alarm Type	Expected Severities	Action
1	TKPIC00001: WatchDog	LOSS_OF_SIGNAL	COMMUNICATIONS_ALARM		No Change
2	TKPIC00002: Queue Size Exceeded	QUEUE_SIZE_EXCEEDED	QUALITY_OF_SERVICE_ALARM		No Change
3	TKPIC00003: Software Error	SOFTWARE_PROGRAM_ANORMALLY_TERMINATED	PROCESSING_ERROR_ALARM		No Change
4	TKPIC00004: Storage capacity limit exceeded	STORAGE_CAPACITY_PROBLEM_M3100	PROCESSING_ERROR_ALARM		No Change
5	TKPIC00005: CPU cycles limit exceeded	CPU_CYCLES_LIMIT_EXCEEDED	PROCESSING_ERROR_ALARM		No Change
6	TKPIC00006: Authentication failed	UNAUTHORIZED_ACCESS_ATTEMPT	SECURITY_VIOLATION		No Change
7	TKPIC00010: Network interface capacity exceeded	TRANSMIT_FAILURE	EQUIPMENT_ALARM		No Change
8	TKPIC00011: Low available physical memory	CONGESTION	QUALITY_OF_SERVICE_ALARM		No Change
9	TKPIC00011: Link Failure	CALL_ESTABLISHMENT_ERROR	COMMUNICATIONS_ALARM	MINOR,CRITICAL	No Change
10	TKPIC0011: Local Changeover	CALL_ESTABLISHMENT_ERROR	COMMUNICATIONS_ALARM	MAJOR,CRITICAL	No Change
11	TKPIC0012: Remote Processor Outage	RECEIVER_FAILURE_M3100	EQUIPMENT_ALARM	MAJOR,CRITICAL	No Change
12	TKPIC0013: Local Processor Outage	TRANSMITTER_FAILURE_M3100	EQUIPMENT_ALARM	MAJOR,CRITICAL	No Change
13	TKPIC0014: Local Inhibition	CALL_ESTABLISHMENT_ERROR	COMMUNICATIONS_ALARM	MAJOR,CRITICAL	No Change
14	TKPIC0015: Remote Inhibition	CALL_ESTABLISHMENT_ERROR	COMMUNICATIONS_ALARM	MAJOR,CRITICAL	No Change
15	TKPIC0016: Route Unavailability	CALL_ESTABLISHMENT_ERROR	COMMUNICATIONS_ALARM	MAJOR,CRITICAL	No Change
16	TKPIC0017: Unavailable User Part Tx	COMMUNICATION_PROTOCOL_ERROR	COMMUNICATIONS_ALARM	MINOR,CRITICAL	No Change
17	TKPIC0018: Unavailable User Part Rx	COMMUNICATION_PROTOCOL_ERROR	COMMUNICATIONS_ALARM	MINOR,CRITICAL	No Change
18	TKPIC0033: Q752 1_10 Threshold	THRESHOLD_CROSSED	QUALITY_OF_SERVICE_ALARM	MINOR,MAJOR,CRITICAL	No Change
19	TKPIC0034: Q752 2_1 Threshold	THRESHOLD_CROSSED	QUALITY_OF_SERVICE_ALARM	MINOR,MAJOR,CRITICAL	No Change
20	TKPIC0035: Q752 2_15 (min) Threshold	THRESHOLD_CROSSED	QUALITY_OF_SERVICE_ALARM	MINOR,MAJOR,CRITICAL	No Change

Figure 28: Alarms Severity offset Screen

1. Display the **Alarm** Specific Problem to be modified.
2. Modify offset setting in Action column. It will modify incoming alarm event severity (or reject event) according its specific problem according below table

Incoming severity	Increase severity			No change	Decrease severity			Ignore
	By 3	By 2	By 1		By 1	By 2	By 3	
CRITICAL	CRITICAL	CRITICAL	CRITICAL	CRITICAL	MAJOR	MINOR	WARNING	NONE
MAJOR	CRITICAL	CRITICAL	CRITICAL	MAJOR	MINOR	WARNING	WARNING	NONE
MINOR	CRITICAL	CRITICAL	MAJOR	MINOR	WARNING	WARNING	WARNING	NONE
WARNING	CRITICAL	MAJOR	MINOR	WARNING	WARNING	WARNING	WARNING	NONE

TABLE 30: ALARM SEVERITY OFFSETS

**Note:** To update the alarm list, click the Refresh button on the toolbar. The list is updated to show the latest changes.

## Managing Third Party (External) Applications

The CCM Home page also provides a means of managing third party (external) applications. Clicking on the link enables you to add, modify or delete an external application.

The list screen shows the following application information.



The screenshot shows a table with columns: Host Name, IP Address, Application, Version, Description, and Actions. The table lists applications with their respective details and actions.

[X]	#	Host Name	IP Address	Application	Version	Description	Actions

Figure 29: Thirdparty List Screen

Column	Description
Host Name	Provides the name of the server housing the application
IP Address	Gives the IP Address of the server
Application	Shows the application name
Version	Shows the version of the application
Description (Optional)	Shows any specific information (if any) about the application
Actions	Provides icons to perform specific actions on the application such as deleting an application.

TABLE 31: THIRD PARTY (EXTERNAL) APPLICATION COLUMNS

### Creating a Third Party Session

Complete these steps to create a third party session:

- From the Home Page, click **Manage Thirdparty Applications**.  
The *List* screen opens.

[X]	#	Host Name	IP Address	Application	Version	Description	Actions
-----	---	-----------	------------	-------------	---------	-------------	---------

Figure 30: Thirdparty List Screen

- Click **Add** from the tool bar.  
The *Add* screen opens

**Please provide following details of thirdparty application**

<b>Host Information:</b>	
Host Name	IP Address
<input type="text"/>	<input type="text"/>
<b>Thirdparty Application Information:</b>	
Application Name	Version
<input type="text"/>	<input type="text"/>
<b>Description</b>	
<input type="text"/>	
<input type="button" value="Reset"/> <input type="button" value="Cancel"/> <input type="button" value="Add"/>	

Figure 31: Thirdparty Application Add Screen

- Enter the **Host Name**.
- Enter the **IP Address** of the host machine.
- Enter the **Application Name**.
- Enter the **Version**.
- (Optional) Enter a **Description** of the application.
- Click **Add**.

The session information is added to the system

### Modifying a Third Party Session

Complete these steps to modify a third party application session:

- Select **Home Page > Manage Thirdparty Applications**.  
The *List* screen opens.
- Select the **session** to be modified.
- Click **Modify** the session screen opens.
- Make the necessary modifications.

5. Click **Modify**.

The modifications are saved and you are returned to the list screen.

### Deleting a Third Party Session

Complete these steps to delete a third party application session:

1. Select **Home Page > Manage Thirdparty Applications**.

The *List* screen opens.

2. Select the **session** to be deleted.

3. Click **Delete** the session screen opens.

4. Click **OK** at the prompt.

The session is deleted from the system.

## Auto Synch Parameters

The CCM Home page provides a Auto Synch Parameters feature that automates the synchronization and apply process at timed intervals for IMF subsystems.

**Note:** The Auto Synchronization process is only for IMF subsystems. Both IXP and PMF subsystems need to be manually synchronized and applied.

Clicking on the **Auto Synch Parameters** feature on the Home Page opens the Auto Synch Parameters pop-up window. This pop-up window has two options.

- Configure Auto Synch - this option enables the user to turn on or turn off the auto synth feature.

**Note:** The default is **Off**.

- Synch Interval (in minutes) - once the auto synth feature is turned on, then the user can enter a time interval in minutes and the auto synth process will continue to occur at that interval.

Once the parameters have been set, click **OK**. The pop-up window vanishes and the system is now set.

## xMF Synchronization Reports

The CCM Home page provides an xMF Synchronization Reports feature that provides a text file providing the information traditionally given in the manual synchronization process. This feature works in combination with the Auto Synch Parameters feature. If the Auto Synch Parameters feature is turned on, then the IMF synchronization reports are generated at the intervals set in Auto Synch Parameters.

**Note:** Default interval is 5 minutes

The xMF synchronization report, like the manual process, provides the following information in text format.

- Elements Added - shows the number of elements added to the IMF subsystem.
- Elements Removed - shows the number of elements added from the IMF subsystem.
- Elements Modifies - shows that number of elements modified in the IMF subsystem.
- No Change - shows the number of elements that were not affected in the synchronization process.
- Errors - shows errors that occurred during the synchronization process.

## Chapter 5: Equipment Registry

---

### About Equipment Registry

The Equipment Registry perspective is used to manage (create, modify and delete) sites, subsystems and physical servers. This perspective presents you with a graphic orientation of the physical equipment defined in PIC.

In addition, subsystem creation is accomplished in an automated single-step discovery process. CCM automatically discovers all applications and application specific data. Once a subsystem is created, the applications and application specific data can be modified using the Acquisition (xMF) and Mediation (IXP) perspectives.

### Sites

A site consists of different kinds of subsystems with each subsystem having one or more hosts. Upon installation, CCM, by default, creates two sites (colored blue to denote that they are default sites):

- Legacy - has four categories - MSW and XMF-LEGACY. For legacy systems you only have the capability to create subsystems and add hosts to the CCM system. Discovery of application, network elements and sessions happens automatically on creating the subsystem and adding hosts to the subsystem. No further configuration is possible with the legacy systems.
- NOC - gives information of the servers that make up the CCM. For all servers, except Report Server that needs to be loaded manually, you do not need to change/add anything under the NOC site. For more information about the report server, see [Managing the Report Server](#). You do not need to change/add anything under the NOC site.

Apart from these two default sites, you can add any number of sites. The number of sites depends on the logical grouping of the monitored location. Once you create a site four categories of subsystems are automatically created under the site:

- DWH - Data Warehouse
- IXP - Integrated xDR Processor (Mediation Perspective)
- XMF - Integrated Message Feeder (IMF) and Probe Message Feeder (PMF) (Acquisition Perspective)
- EFS - Exported Filer Server
- NEPTUNE - Astellia Neptune probe

### Site Creation and Discovery Process

On creating the subsystems and adding the hosts under the subsystem, CCM conducts a one-step process of creating subsystems, discovering the applications, network elements (in case of a XMF subsystem), discovering xDR builders and dictionaries (IXP subsystem) when you click the **Create** button. A summary of the hosts and the elements discovered is provided to the user.

#### ***Listing Sites***

When you select *Sites* from the object tree, all sites are listed in the left-hand workspace. The figure shown here shows an expanded Equipment Registry Object tree with site the sites listed in the workspace. The railway shows the List function being active.

Site Name	Description	Actions
1 TCP-Site	Auto-created site for Legacy applications and their hosts	
2 Legacy	Auto-created site for NSP components	
3 NOC		

Figure 32: Site List Screen

### Creating a Site

Complete these steps to add a site.

1. On the object tree, select **Sites**.
2. Select **Add** from the pop-up menu.

The *Add* screen opens shown in the figure.

The Site Add screen is a modal window with the following fields and buttons:

- Name:** A text input field.
- Description:** A text area for entering a description.
- Buttons:**
  - Reset:** A button to reset the form.
  - Cancel:** A button to cancel the operation.
  - Add:** A button to add the site.

Figure 33: Site Add Screen

3. Type in the **Name** of the site.
4. (Optional) Type in a **Description** of the site.
5. Click **Add**.

A prompt appears stating that the site has been successfully added, and the site appears in the object tree list in alphanumerical order with associated subsystems shown in this figure.

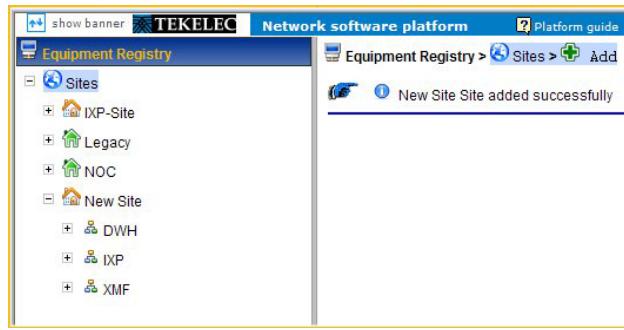


Figure 34: New Site With Subsystems

### **Modifying a Site**

Complete these steps to modify a site.

1. Select the **Site** from the object tree.
2. Right-click and select **Modify**.

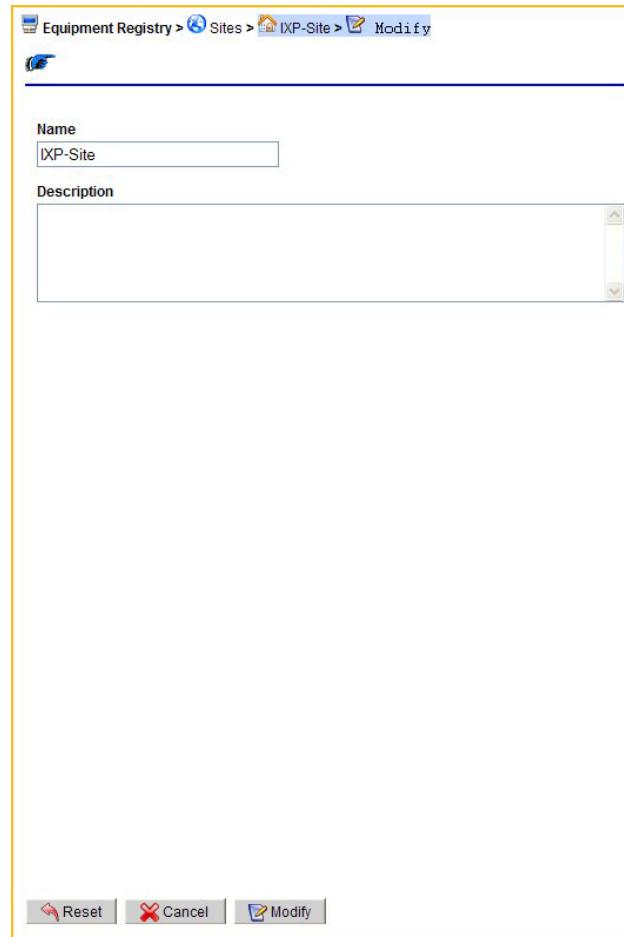


Figure 35: Site Modify Screen

1. Make necessary modifications to the site information.
2. Click **Modify**.  
The modifications are saved.

### **Deleting a Site**

Complete these steps to delete a site.

**Note:** Before deleting a site, all the hosts belonging to that site must first be deleted.

1. Select the **Site** to be deleted from the *object tree*.
2. Click **Delete** from the *pop-up menu*.
3. Click **OK** at the prompt.

The site is deleted from the *object tree*.

## Managing the Report Server

The report server subsystem, (if it is discovered), is located in the NOC site, and provides the infrastructure for static enrichment, KPI generation, reporting back-end (including the reporting engine and report database), web applications for viewing and administrating the reports as well as scheduling reports.

Report servers can be clustered and/or decoupled according to load-balancing and automatic-failover and KPI storage needs. There is a potential for CCM to discover three servers in the Report Server Subsystem. They are:

- Report Sever (RS) - A server designated as the Primary or Secondary report server that processes and generates the scheduled reports.
- Report Data Server (RDS) - This can be a separate server used to house the report KPI database. The RDS can also house the Centralized Management System (CMS) database.
- Central Management Sever (CMS) database - The CMS is an internal database maintained by Business Objects and needed by the RS to run reports.

The discovery process is identical to all subsystem discovery processes on CCM. The results will show:

- What was discovered.
- Any modifications that occurred to the subsystem since the last discovery process.
- Any errors that occurred during the discovery process.

Note: For more information on discovering a report server, see [Adding an IXP Subsystem](#).

Note: Since the Report Server provides the structure for Report Server Platform (RSP), it must be discovered first before the RDS. (There will be a prompt to discover the Report Server first before the CMS if a CMS is designated.).

Once the report servers have been installed and discovered, session network views can be created for reports. For more information, see [Creating Network Session Views](#).

### ***Updating a Report Server***

Once the Report Server subsystem has been installed and new report packages are added to a PIC system (installed on the CMS), the CMS has a "discover applications" icon located on the tool bar.

Complete these steps to re-discover report package updates on a report server.

1. Select **Equipment Registry > NOC > Report Server**.
2. Select the **Report Server (CMS)** to be updated.
3. Click the **Discover Applications** icon located on the tool bar.

The discovery process begins. Once the discovery process is completed the summary page will show any new report package that has been installed on the CMS but not yet discovered in CCM, any modifications in the existing report package or any errors in the discovery process.

### ***Deleting a Report Server***

Complete these steps to delete a Report Server.

**Note:** The Report Data Sever (RDS) must be deleted first before either the Central Management System (CMS) and the Report Server (RS).

When deleting a report server three prerequisites need to be met.

**Note:** If any of the prerequisites are not met, a prompt appears stating the Report Server cannot be deleted because a dependency exists.

- No report package (that was discovered for the RS being deleted) is in use. For example, the report package is not activated for any xDR session in the Report Admin.

- All historic KPI sessions have been deleted from the RDS.
- All report packages discovered for the RS have been removed from the CCM.

1. Select the **Mediation > Sites > NOC > Report Server (RDS)** to be deleted.
2. Select **Delete** from the tool bar.
3. Click **OK** at the prompt.

If a report server (RS) or Central Management System (CMS) needs to be deleted, they can be deleted next with CMS first and finally RS.

#### Procedure for Deleting KPIs Used by a RS

Complete these steps to delete KPIs on an RS that is to be deleted.

**Note:** For more information on using the Report Admin application, see the Report Software Platform User Guide.

**Note:** If a KPI session has KPIs being written to it, the report package must first be de-activated in the Report Admin application (see Report Software Platform User Guide for details) before the following steps can be performed.

1. Select **Report Admin (application) > Reporting Sessions** to be deleted.
2. Click **Permanently Remove** on the KPI session to be deleted.
3. Select **CCM > Mediation > Sessions**.
4. Select the **KPI session(s)** to be deleted.
5. Click **Delete** on the tool bar.
6. Click **OK** at the prompt.

#### Managing the Export File Server

The export file server (EFS), if it is present, can be added to any site, and is part of the Data Feed Export function of PIC. It is an IXP server that is assigned the EFS designation to handle the data export process. The EFS provides the infrastructure for static enrichment and KPI generation.

**Note:** You can only have one export file server per site.

To add an export server, follow the steps used in adding an IXP subsystem.

## About Subsystems

When you create a site, the following subsystems are created:

- DWH for storage
- IXP for storage and correlation
- xMF for data acquisition
- EFS for exported files

Tree nodes are automatically created for these subsystems. From this perspective you can configure these subsystems by adding hosts and discovering applications that make up the subsystem.

#### Adding a Data Warehouse (DWH)

Complete these steps to add a Data Warehouse to the DWH subsystem.

1. Select **Equipment Registry > Site > DWH**.
2. Right-click on **DWH**.
3. Select **Add** from the pop-up menu.

The *Addscreen* appears.

Add DATA WAREHOUSE subsystem screen - field descriptions

Field	Description
Storage Name	The name of the DWH server
Version	Vesion of the Oracle database (default 10.2) housed in the DWH
Description (optional)	Text field to add useful descriptions about the DWH (Default phrase is, "Created for external storage."
Login User ID	User ID to log into the DWH
Password	Password for logging into the DWH
Service Name	Alphanumeric field to provide the name of the service running the database
Port	Numeric field to enter the port number of the DWH
IP Address	TheIP address of DWH

TABLE 32: DATA WAREHOUSE ADD SCREEN

4. Enter the **Storage Name** of the DWH .
5. Enter the **Version** of the Oracle database running on the DWH.
6. (Optional) Enter a **Description** of the DWH
7. Enter the **Login User ID** for the DWH
8. Enter the **Password**.
9. Enter the **Service Name** of the DWH.
10. Enter the **Port number**.
11. Type in the **IP Address** of the DWH
12. Click **Add** to add the subsystem to the list.

The DWH is added to the system.

### Modifying a Data Warehouse (DWH)

Complete these steps to modify a subsystem.

1. Select **Equipment Registry > Site > DWH** to be modified.
2. Select **Modify** from the popup menu.
3. Make the necessary modifications.
4. Click **Modify**.

A prompt appears stating that the subsystem was modified. You must now apply changes to that subsystem for the changes to take effect.

### Deleting a Data Warehouse (DWH)

Complete these steps to delete a DWH subsystem.

1. Select the **Equipment Registry >Site > DWH** to be deleted.
2. Select **Delete** from the popup menu.
3. Click **OK** at the prompt.

### Virtual IP Address Assignment

To assign a Virtual IP Address (VIP address) the following criteria need to be met.

- The VIP must be in the same subnet for the subsystem (IXP or xMF) and not being used for a host.

In addition, it is recommended to take the last available IP from the subnet since the IP is always assigned from the small number to the big number starting with server "1a."

**Note:** To find out the last available IP address, run `ifconfig` from one of the servers (or `platcfg` for the user) to get the broadcast address.

Here is an example of using the `ifconfig` for finding the last available IP address.

```
[root@ixp0301-1c ~]# ifconfig
eth01  Link encap:Ethernet HWaddr 00:24:81:FB:CB:78
        inet addr:10.240.9.102 Bcast:10.240.9.127 Mask:255.255.255.192
              UP BROADCAST RUNNING MULTICAST MTU:1500 Metric:1
              RX packets:100220031 errors:0 dropped:0 overruns:0 frame:0
              TX packets:103153021 errors:0 dropped:0 overruns:0 carrier:0
              collisions:0 txqueuelen:1000
              RX bytes:1700925078 (1.5 GiB) TX bytes:3351841865 (3.1 GiB)
              Interrupt:185 Memory:f8000000-f8011100

lo     Link encap:Local Loopback
        inet addr:127.0.0.1 Mask:255.0.0.0
              UP LOOPBACK RUNNING MTU:16436 Metric:1
              RX packets:10626760 errors:0 dropped:0 overruns:0 frame:0
              TX packets:10626760 errors:0 dropped:0 overruns:0 carrier:0
              collisions:0 txqueuelen:0
              RX bytes:1952272307 (1.8 GiB) TX bytes:1952272307 (1.8 GiB)
```

In this example the Bcast 10.240.9.127 is one plus the last IP in the subnet, so 10.240.9.126 is the best candidate for the VIP.

### Adding an IXP Subsystem

Note: You can have an unlimited number of IXP subsystems per site.

Complete these steps to add an IXP subsystem to a site and discover its elements.

1. Select **Equipment Registry > Site** that has the IXP subsystem.
2. Right-click on the site **IXP**.
3. Select **Add**.

The *Add* screen appears.

Add IXP subsystem screen - field descriptions

Field	Description
Subsystem Name	The name of the IXP subsystem (required).
VIP Address	This is the Virtual IP address of the server where the IXP subsystem resides.  <b>Note:</b> The VIP address is established when the IXP subsystem is initially installed and integrated into the customer network. The assignment of the VIP address can be the default of the broadcast address (broadcast-1) for the subnet, or it can be manually assigned to an address in the subnet. See <a href="#">Virtual IP Address Assignment</a> .
IP Address	The IP address of IXP server where the IXP subsystem resides.
Add button	Adds the IP address to the list (you can have more than one IP address for a subsystem).
Delete button	Deletes the subsystem parameters from the list.
Reset button	Resets all settings to default.
Cancel button	Cancels the current process and returns back to original screen.
Create button	Adds the subsystem to the site.

TABLE 33: IXP SUBSYSTEM ADD SCREEN FIELD DESCRIPTIONS

4. Enter the **Name** of the IXP subsystem.
5. Enter the **VIP Address** of the subsystem.
6. Enter the **IP Address** of the subsystem.
7. Click **Add** to add the subsystem to the list.

**Note:** Repeat steps 4-7 to add each additional subsystem.

8. Click **Create**.

A progress bar appears as the system searches out the IP address, applications and protocols. When the discovery process is completed a Results Summary screen opens.

**Note:** Some systems use a large number of protocols and the time span for the discovery process can take several minutes.

**Note:** Use the Modify function to add a host(s) to an IXP subsystem.

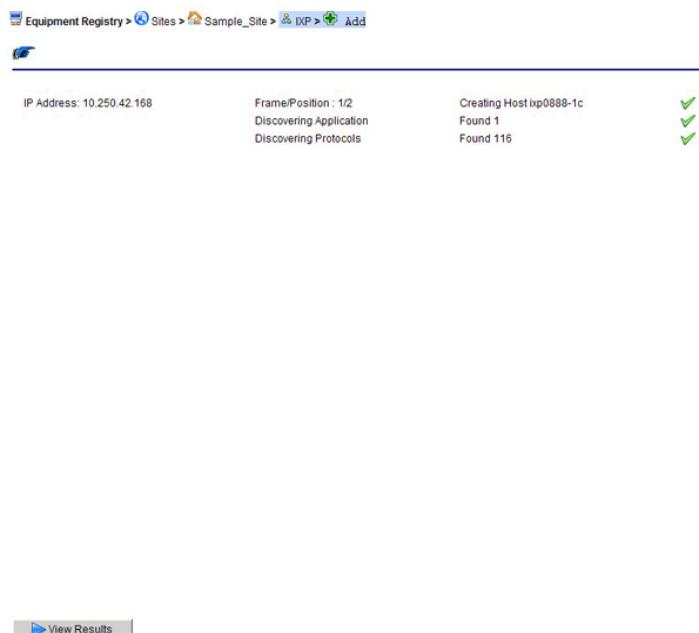


Figure 36: Subsystem Results Summary Screen

**Note:** If there is a problem with the position, application or protocols, the color of the check mark will be yellow.



Figure 37: Results Summary Screen With Error Symbol

9. Click **View Results**.

The Results screen opens.

The screen has four tabs with five subtabs:

- Host - Shows the host parameters and status (added successfully or not)
- Application - Shows a summary of the number of applications discovered
- xDR Builders - Opens another screen with five tabs that lists the following parameters:

**Note:** xDR Builders are discovered and are the same for the entire subsystem.

- Added - shows the xDR Builders that added to the subsystem from the last synchronization
- Removed - shows the number of xDR Builders removed from the system from the last synchronization
- Modified - shows any xDR Builders that have been modified from the last synchronization
- No Change - shows any xDR Builders that have not been changed from the last synchronization

- Errors - shows a list of any errors that occurred during the discovery process or synchronization
- d. Synchronize IXP - shows if the synchronization was successful or not.



Figure 38: Object Tree Showing Added Subsystem With Results Screen

At this stage legacy subsystems can be added or additional IXP subsystems can be manually added.

10. Right click on the **IXP subsystem** and select **Apply Changes** for the changes to take effect.

### Modifying an IXP Subsystem

Complete these steps to modify a subsystem.

1. Select the subsystem to be modified.  
The *List* screen opens.
2. Select **Modify** from the popup menu.
3. Make the necessary modifications.
4. Click **Modify**.

A prompt appears stating that the subsystem was modified. You must now apply changes to that subsystem for the changes to take effect.

### Deleting an IXP Subsystem

**Note:** You cannot delete a subsystem that has dependent applications such as sessions. You must first delete the dependent applications, then you can delete the subsystem.

Complete these steps to delete a subsystem.

1. Select the **subsystem** to be deleted from the list. The *List* screen opens.
2. Select **Delete** from the popup menu.
3. Click **OK** at the prompt, the subsystem is deleted.

You must now apply changes for that subsystem for the changes to take effect.

### Re-discovering Applications

Once a IXP subsystem has been created, you can re-discover applications by completing the following steps.


1. Select the **subsystem** to be modified.  
The *List* screen opens shown below.

Equipment Registry > Sites > IXP-M12 > XMF > IXP-M12/XMF > List								
Modify Host Operation Cancelled								
Records/Page 50 Page 1/1 Total Records: 1              								
Actions	Owner	Types of Applications	IP Address	Position	Frame	Description	Host Name	Records/Page
	tekelec	IMF NG	10.250.44.38	2	1		zatum-1b	50

Figure 39: IXP Subsystem List Screen

2. Select **Host** from the list.
3. Click **Discover Applications** on the toolbar.

The screen changes, shown below, to show the re-discovered applications.

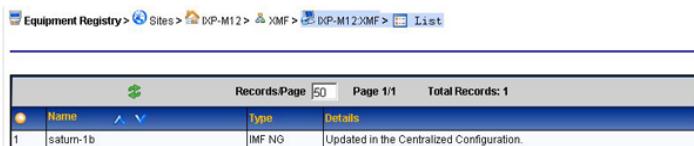

List		
	Name	Type
1	saturn-1b	IMF NG

Updated in the Centralized Configuration.

Figure 40: IXP Subsystem List Screen

**Note:** For adding protocols and builders to an IXP subsystem, see [Discovering xDR Builders](#) and [Configuring xDR Dataflow Processings](#)."

### Managing an IXP Storage Pool

There can be an unlimited number of storage servers in a subsystem. Storage servers can be created, modified and removed from a subsystem without interrupting the IXP performance. Each storage server can exist in one of three states.

Server State	Description
Active	Insertion and queries are allowed on a storage server in this state
Query	Only queries are allowed on a storage server in this state
Maintenance	The storage server will not allow any insertion or queries of sessions while in this state.

TABLE 34: IXP STORAGE SERVER STATES

**Note:** If an IXP storage server is in "Query" state, no configuration actions can be undertaken. All servers must be in "Active" state when sessions are created for queries on such sessions to be successful. Otherwise, if a query is launched in ProTrace on a newly created session, a "Unable to execute query: ORA-00942: table or view does not exist." will appear.

### Storage Server Designations

Once an IXP subsystem has been created, you can an unlimited amount of servers in that subsystem. Once the servers have been discovered, CCM provides one of the following designations for each server on the subsystem.

Server Designation	Description
IXP-XDR	This server is used as an xDR storage server
IXP-PDU	This server is used as the PDU server
IXP-BASE	This server is used as the IXP base server

TABLE 35: IXP SERVER DESIGNATIONS

At least one server must have the designation IXP-XDR otherwise the discovery will fail. Once the designations have been made, CCM creates the pool of storage servers with designation IXP-XDR. The first IP Address should be assigned to the storage server.

**Note:** It is recommended that the sequence of IP Address for server should be the following order:

- All IXP storage servers
- All IXP base servers
- All IXP PDU servers

### Adding a Storage Server to an IXP Storage Pool

Complete these steps to add a storage server to an IXP storage pool.

Note: IXP storage servers can be added to a pool without interrupting IXP. After adding a storage server to a pool, IXP evenly distributes xDRs to all storage servers in the pool.

1. From the *Equipment Registry* object tree, select **Site > IXP subsystem**.
2. Right-click on the **subsystem**.
3. Select **Add** from the pop-up menu.

The *Add IXP subsystem* screen opens shown in the figure below.

Figure 41: Add IXP Subsystem Screen

#### Add IXP subsystem screen - field descriptions

Field	Description
Subsystem Name	The name of the subsystem (required)
IP Address	The IP address of subsystem
Add button	Adds the IP address, to the list (you can have more than one IP address if there are multiple servers in the subsystem)
Delete button	Deletes the subsystem parameters from the list
Reset button	Resets all settings to default
Cancel button	Cancels the current process and returns back to original screen.
Create button	Adds the subsystem to the site.

TABLE 36: IXP SUBSYSTEM ADD SCREEN

4. Type in the **Name** of the subsystem.
5. Type in the **IP Address** of the server in the subsystem.
6. Click **Add** to add the subsystem to the list.

**Note:** Repeat steps 4-7 to add each additional subsystem.

7. Click **Create**.  
A progress bar appears as the system searches out the IP address, applications and protocols. When the discovery process is completed a results screen appears showing the parameters.

**Note:** Some systems use a large number of protocols and the time span for the discovery process can take several minutes.

**Note:** Use the Modify function to add a host(s) to an IXP Subsystem.

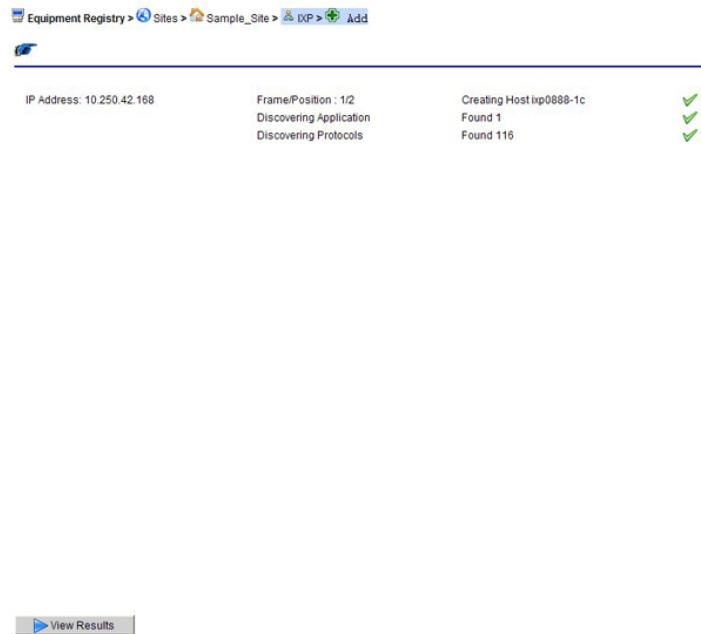


Figure 42: Subsystem Results Screen

**Note:** If there is a problem with the position, application or protocols, the color of the check mark will be yellow.



Figure 43: Results Screen With Error Symbol

8. Click View Results.

The *Results* screen opens shown below.

The screen has four tabs:

- a. Host - Shows the host parameters and status (added successfully or not)
- b. Application - Shows a summary of the number of applications discovered
- c. xDR Builders - Opens another screen with five tabs that lists the following parameters:

**Note:** xDR Builders are discovered and are the same for the entire subsystem.

- Added - shows the xDR Builders that added to the subsystem from the last synchronization
- Removed - shows the number of xDR Builders removed from the system from the last synchronization
- Modified - shows any xDR Builders that have been modified from the last synchronization
- No Change - shows any xDR Builders that have not been changed from the last synchronization
- Errors - shows a list of any errors that occurred during the discovery process or synchronization

- d. Synchronize IXP - shows if the synchronization was successful or not.



Figure 44: Object Tree Showing Added Subsystem With Results Screen

**Note:** You must apply changes to the subsystem for the changes to take effect.

## Deleting a Storage Server

Complete these steps to delete a storage server in a storage pool.

1. Select the **equipment registry > site > subsystem > server** to be deleted.
2. Make the server **inactive**.
3. Select **mediation > site > ixp subsystem > server > application**.
4. **Delete** the application.
5. Select **equipment registry > site > subsystem > server**.
6. Select **Delete** from the tool bar.
7. Click **OK** at the prompt.

The server is deleted

**Note:** You must **Apply Changes** before the changes take place.

## About xMF (IMF and PMF) Subsystems

You have the ability to discover xMF Subsystem information. xMF subsystems include both IMF and PMF. Once the subsystem has been created and hosts discovered you must go to either the Acquisition perspective to configure the Subsystem.

**Note:** You can only have one IMF or PMF subsystem per site. To add another xMF Subsystem, you need to create another site.

## Adding an IMF Subsystem to a Site

After you have created a site, complete these steps to add an IMF subsystem.

**Note:** A site can only have one IMF subsystem.

**Note:** When an IMF subsystem is added all network elements are automatically discovered.

1. Select **Equipment Registry > Site > xMF**.
2. Click **Add** on the xMF subsystem tool bar.

**Note:** The right-click menu on the xMF folder can be also used. Select Add from the menu options.

Field	Description
Subsystem Name	Name is identical to site name since only one xMF subsystem can exist on a site.
VIP Address	This is the Virtual IP address of the server where the xMF subsystem resides. <b>Note:</b> The VIP is established by the xMF subsystem when it is installed and integrated into the customer network. The assignment of the VIP address can be the default of the broadcast address for the subnet or it can be manually assigned to an address in the subnet. See <a href="#">Virtual IP Address Assignment</a> .
IP Address	The IP address of IMF subsystem.
Add button	Adds the IP address to the list (you can have more than one IP address for a subsystem).
Delete button	Deletes the subsystem parameters from the list.
Reset button	Resets all settings to default.
Cancel button	Cancels the current process and returns back to original screen.

Create button	Adds the subsystem to the site.
---------------	---------------------------------

TABLE 37: xMF SUBSYSTEM ADD SCREEN FIELD DESCRIPTIONS

3. Enter the **VIP Address**. (See [Virtual IP Address Assignment](#) for more information on using VIPs.)
4. Enter the **IP Address** for the IMF host.

**Note:** This address is established when the IMF subsystem is installed and integrated into the customer network.

5. Click **Add**.

6. Click **Create**.

The *Verification* screen opens to show the discovery process.

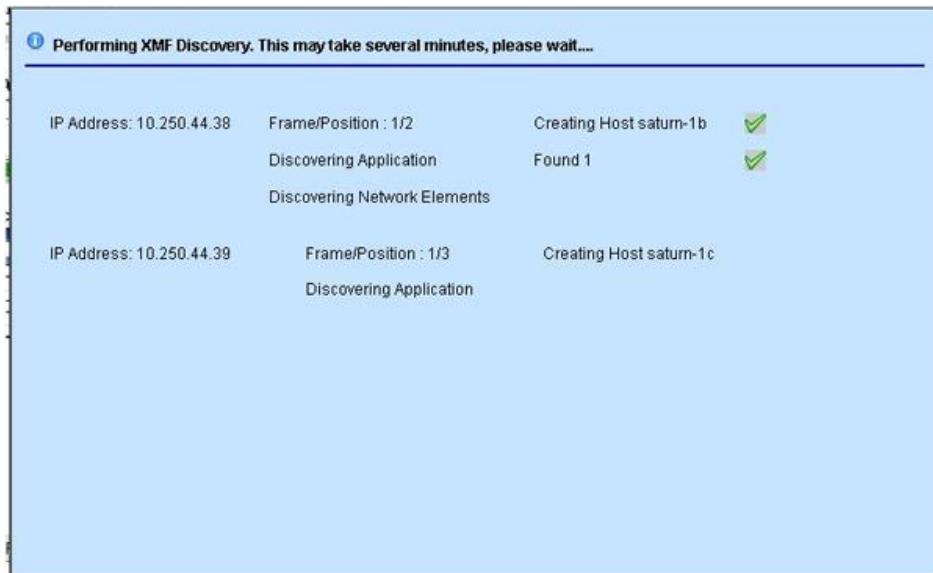


Figure 45: Verification Screen - Done Button Not Shown

7. Click **Done**.

The Results screen opens showing the following information:

**Note:** The Results Summary screen only opens when the discovery process has finished.

- a. Host tab - showing the IP addresses of the discovered hosts and the result
- b. Application - showing the applications that were discovered
- c. Network Element Discovery - showing the links belonging to the hosts that has the following five tabs:

- Added - shows any elements that have been added to the host since the last discovery process
- Removed - shows any elements that have been removed since the last discovery process
- Modified - shows any elements that have been modified since the last discovery process
- No change - shows the elements that have not changed since the last discovery process
- Error - shows any errors that occurred in the discovery process

**Note:** If this is the first discovery process, all the tabs will be empty except for Added and Error. The other tabs are only populated when changes have been made to an existing IMF subsystem and the Synchronize function is used and the discovery process is repeated (see how to modify hosts).

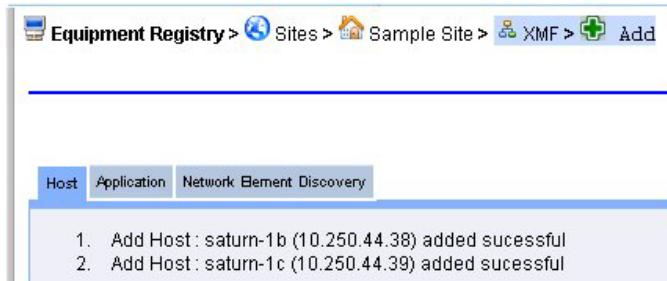


Figure 46: Results Summary Screen - Host Tab

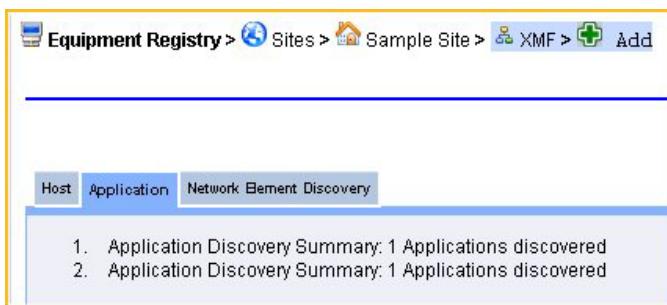


Figure 47: Results Summary Screen - Application Tab

		Name	Type	Details
	1	Josi_saturn	Managed Object	Nothing
	2	Josi_saturn STC	Managed Object	Nothing
	3	Josi_saturn-5000-6	Managed Object	Nothing
	4	Josi_saturn-5000-7	Managed Object	Nothing
	5	Josi_saturn-5000-8	Managed Object	Nothing
	6	Josi_saturn-5000-9	Managed Object	Nothing
	7	Josi_saturn-5000-10	Managed Object	Nothing

Figure 48: Results Summary Screen - Network Element Discovery

8. Select the subsystem again to see the newly created hosts and applications.

## Modifying an xMF Subsystem

Complete these steps to modify an xMF subsystem host.

1. Select the **Site > xMF subsystem** to be modified from the object tree. The *List* screen opens.
2. Select the **Host**.
3. Click **Modify** from the tool bar.
4. Make necessary **modifications** on either screen (click *Next*) to open the next screen.
5. Click **Modify** after you have made the necessary modifications.

**Note:** For the changes to take effect, right-click on the PMF subsystem and select **Apply Changes** from the menu.

### **Modifying an IMF Subsystem Host**

Complete these steps to modify an xMF subsystem host.

1. Select the **Site > xMF** subsystem to be modified from the object tree.  
The *List* screen opens.
2. Select the **Host**.
3. Click **Modify** from the tool bar.
4. Make necessary **modifications** on either screen (click **Next**) to open the next screen.
5. Click **Modify** after you have made the necessary modifications.

**Note:** For the changes to take effect, right-click on the PMF subsystem and select **Apply Changes** from the menu.

### **Deleting an xMF Subsystem**

**Note:** You can only delete a subsystem if there are no dependent applications to the subsystem. You must delete all hosts and applications first before deleting the subsystem.

Complete these steps to delete an xMF subsystem.

1. Select **Site > xMF** to be deleted.  
The *List* screen opens. (Or select the subsystem from the Site List screen.)
2. Click **Delete**.
3. Click **OK** at the prompt.  
The subsystem is deleted.

### **Adding a PMF Subsystem to a Site**

After you have created a site, complete these steps to add a PMF subsystem to a site.

**Note:** Each site can only have one PMF subsystem.

1. Select **Equipment Registry > Site > xMF**.
2. From the xMF subsystem right-click menu select **Add**.

Field	Description
Subsystem Name	Name is identical to site name since only one xMF subsystem can exist on a site.
VIP Address	This is the Virtual IP address of the server where the PMF subsystem resides. <b>Note:</b> The VIP address is established when the PMF subsystem is initially installed and integrated into the customer network. The assignment of the VIP address can be the default of the broadcast address (broadcast-1) for the subnet, or it can be manually assigned to an address in the subnet. See <a href="#">Virtual IP Address Assignment</a> .
IP Address	The IP address of xMF server where the PMF subsystem resides.
Add button	Adds the IP address, to the list (you can have more than one IP address for a subsystem).
Delete button	Deletes the subsystem parameters from the list.
Reset button	Resets all settings to default.
Cancel button	Cancels the current process and returns back to original screen.
Create button	Adds the subsystem to the site.

TABLE 38: xMF SUBSYSTEM ADD SCREEN FIELD DESCRIPTIONS

3. Enter the **VIP Address**.
4. Enter an **IP Address** for the PMF host.
5. Click **Add**.
6. Click **Create**.  
The system discovers the hosts and cards that belong to the PMF subsystem. All successful discoveries are shown with a check mark beside it. See the figure below.

**Note:** If there is an error, a red x will appear beside the host or application that could not be discovered.

**Note:** E1/T1 Span cards are not auto-discovered, they are manually added to the PMF subsystem. See [Adding an E1/T1 \(SPAN\) Card \(PMF\)](#) for more information.

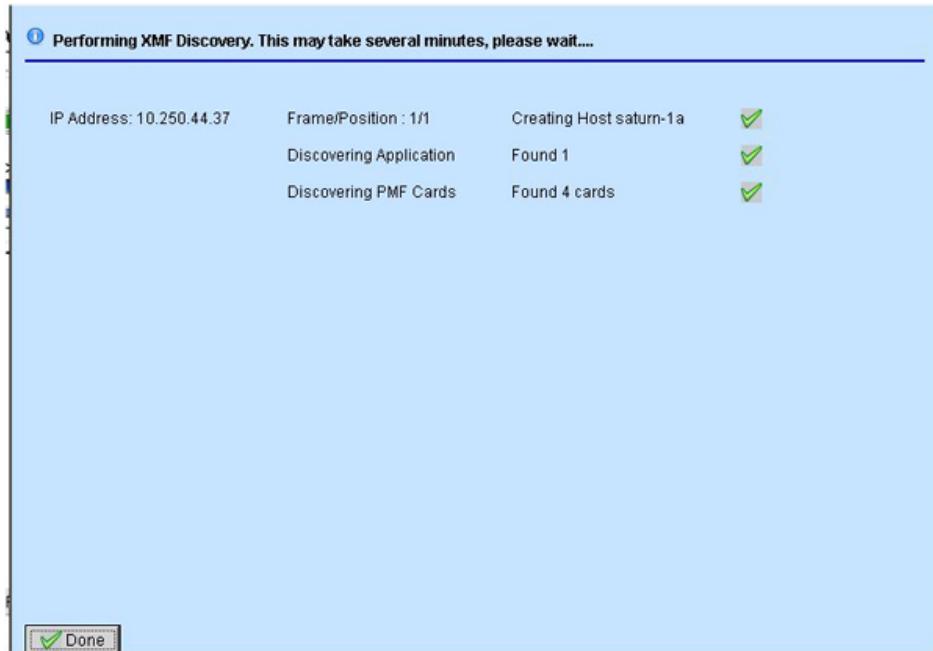


Figure 49: PMF Results Summary Screen

- Click **Done** to close the Results Summary screen and view the discovery summary. The screen has the following tab information shown in the figure shown here:
  - Host tab - showing the IP addresses of the discovered hosts and the result
  - Application - showing the applications that were discovered
  - PMF Card Discovery - showing the cards installed on the host

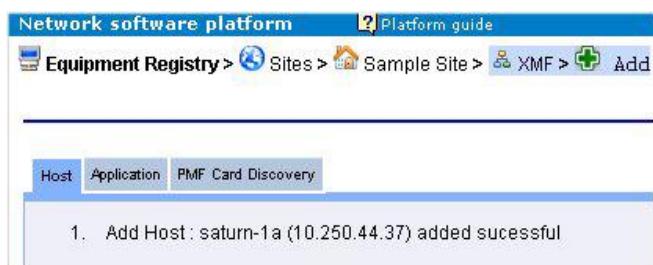


Figure 50: Discovery Summary Screen - Hosts Tab



Figure 51: Discovery Summary Screen - Application Tab

**Note:** The Results screen only opens when the discovery process has been completed.

**Note:** If this is the first discovery process, all the tabs will be empty except for Added and Error. The other tabs are only populated when the discovery process is repeated after there has been some modification to the host (see how to modify hosts.).

Page 1/1 Total Records: 0						
	Slot	Type	Mode	Adm. State	Actions	
<input type="checkbox"/>	1	SPAN	SS7-E1	Enable		
<input type="checkbox"/>	2	NIC 4-Port	-	-		

Figure 52: Discovery Summary Screen - PMF Card Discovery

8. Select the **subsystem** again to see the newly created hosts and applications. If there is an E1/T1 card for the PMF, open the Acquisition perspective to configure the card.

**Note:** Network cards and NGP cards are automatically discovered and do not have to be manually added.

## Modifying a PMF Subsystem Host

Once a PMF subsystem has been created, you can modify the hosts that belong to the subsystem.

Complete these steps to modify a host in a PMF subsystem.

1. Select the **Site > xMF** subsystem to be modified from the object tree. The *List* screen opens.
2. Select the **Host** to be modified.
3. Select **Modify** from the toolbar.
4. Make necessary **modifications**.
5. Click **Modify** after you have made the necessary modifications.

**Note:** For the changes to take effect, right-click on the PMF subsystem and select **Apply Changes** from the menu.

## Deleting a PMF Subsystem

**Note:** You can only delete a subsystem if there are no dependent hosts or applications to the subsystem.

You must delete all hosts and applications before deleting the subsystem.

Complete these steps to delete an xMF subsystem.

1. Select **Site > xMF > PMF** subsystem to be deleted. (Or select the subsystem from the Site List screen.)
2. Delete all **hosts and applications** that belong to the PMF subsystem.
3. Select the **PMF** subsystem.
4. Click **Delete**.
5. Click **OK** at the prompt.

The subsystem is deleted. You must now *apply changes* for the changes to take effect.

## Adding a Neptune probe to a Site

Complete these steps to add Neptune probe.

1. Select the **Equipment Registry > Sites > Site > NEPTUNE** The *List* screen opens.
2. Enter **Probe name**.  
Same validation restriction as session name with maximum length 8.
3. Enter any **User information**.
4. Enter probe **Administration IP**.
5. Enter probe **Process Flow IP**.

6. Enter probe **Login** and **Password**.

Probe name	<input type="text"/>
User information	<input type="text"/>
Administration IP	<input type="text"/> 
Process Flow IP	<input type="text"/>
Login	<input type="text"/>
Password	<input type="text"/>

Figure 53: Neptune probe registration

### Modifying a Neptune probe

Complete these steps to modify Neptune probe.

1. Select the **Equipment Registry > Sites > Site > NEPTUNE**  
The *List* screen opens.
2. Select the Neptune probe to be modified.
3. Select **Modify** from the toolbar.
4. Make necessary **modifications**.
5. Click **Modify** after the necessary modifications are updated.

### Deleting a Neptune probe

Complete these steps to delete Neptune probe.

1. Select the **Equipment Registry > Sites > Site > NEPTUNE**  
The *List* screen opens.
2. Select the Neptune probe to be deleted.
3. Click **Delete**.
4. Click **OK** at the prompt.  
The Neptune probe is deleted.

## Chapter 6: Network Element Configuration

### About Network Elements

The term, Network Elements, refers to customer network SS7, GPRS and IP elements. The perspective is divided into four categories:

- Nodes that include SS7, GPRS and IP
- SS7 Elements that includes Linksets, Links and Signaling Points
- GPRS Elements that includes GB links and Signaling Points
- IP Elements that include Signaling Points, Cards, Application Servers and Associations and Application Server Processes. Associations are divided into two subcategories: IMF and PMF.

In addition, each network element has a child table showing all dependent elements down to the link level. For example, selecting a linkset (shown in the figure) and clicking on the selecting Show Details button on the tool bar shows all the links belonging to that particular linkset.

**SS7 Link list for Linkset Test\_LS\_1**

#	Linkset Custom Name	Custom Name Override	Eagle Name	Description	RID Group Id	Linkset Type
1	Test_LS_1	Yellow	tekelecstp-lspsg941		A	
2	tekelecstp-lspsg941	Green	tekelecstp-lspsg941		A	
3	tekelecstp-lsp911	Green	tekelecstp-lsp911		A	
4	tekelecstp-lsp912	Green	tekelecstp-lsp912		A	
5	tekelecstp-lsp913	Green	tekelecstp-lsp913		A	

**SS7 Link list for Linkset Test\_Link\_1**

#	Link Custom Name	Eagle Name	Description	SLC	Interface Name	Protocol Name	Association Name
1	Test_Link_1			0	DS0A_56K	GB_FR	GA_PMF_M2PA_As
2	Test_Link_1			0	DS0A_56K	GB_FR	M2pa_Top1

Figure 54: Selected Linkset with Corresponding Links

For quick reference, you can query for specific network elements such as nodes, linksets, links or signaling points. This function is very helpful in large networks.

In addition, for linksets and links, you can use the Eagle name or by using the custom override operation create a custom name for a linkset or link.

### Filtering Network Elements

The search option enables you to search for specific elements using the network element filter (query) wizard. Complete these steps to filter a network element.

1. Select the Network Element (Node, Linkset, Link, SP) category from the object menu.  
The *List* screen opens.
2. Click the Filter icon on the tool bar (magnifying glass icon).  
The *network element filter* screen opens.

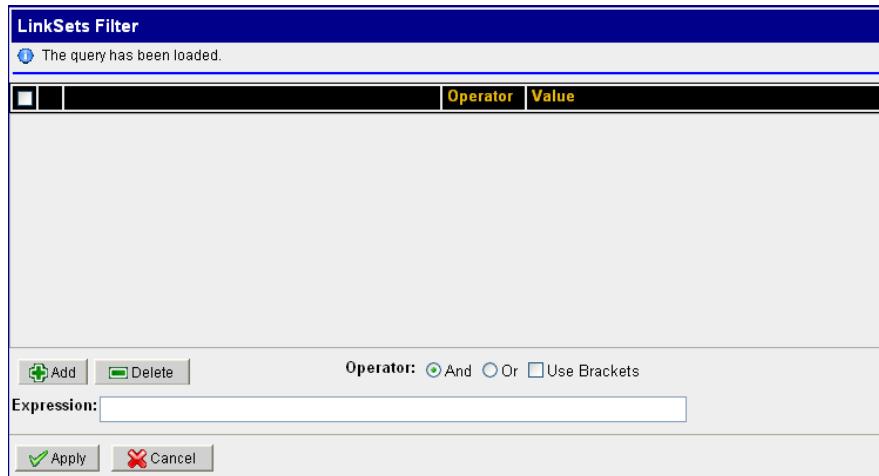


Figure 55: Network Element Filter Screen (Linkset shown)

3. Click **Add**.  
The screen changes to show fields, operators and values.
4. Select a **Field**.
5. Select an **Operator**.
6. Select a **Value**.

**Note:** To create a filter that has multiple expressions, repeat steps 3 thru 6 and select the proper Operator (and, or, use brackets).

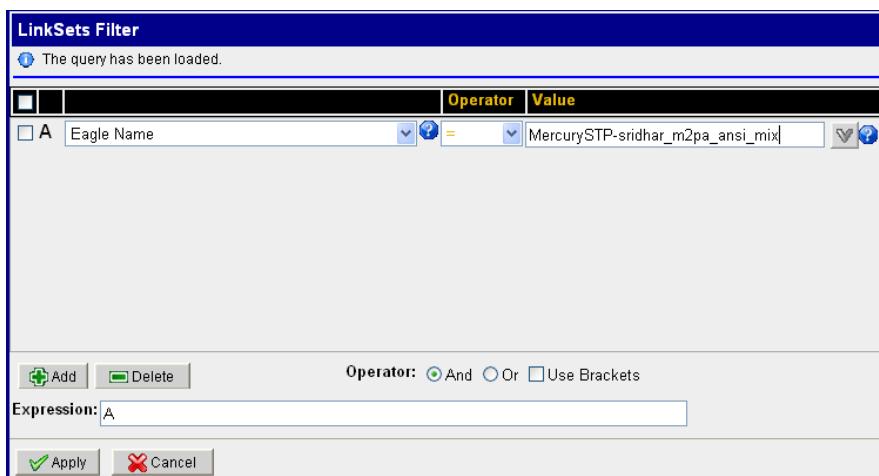


Figure 56: Filter Screen Filled

7. Click **Apply**.  
The found network elements appear in the list table.

## About Nodes

Nodes are the containers for linksets and links. Using CCM, you can create SS7, GPRS and IP nodes.

### Creating a Node

Complete these steps to add a node.

1. Select **Network Elements > Nodes > Node Type (SS7, GPRS, IP) > Add Node**.  
The *Add Node* screen opens shown below.

Field	Description
Name	The name of the node
Description	Optional field to describe the node
Add button	Saves the record to the system and the node shows up in the object tree
Reset button	Resets the screen to default settings
Cancel button	Cancels the procedure

TABLE 39: ADD NODE SCREEN

The screenshot shows a software interface for adding a node. It has two main input fields. The first field is labeled 'Name' and contains the text 'sample Node\_sp\_1-3-7-401'. The second field is labeled 'Description' and contains the text 'Description of a sample node'. There are other fields and buttons in the background, but they are not the focus of the screenshot.

Figure 57: Node Add Screen

2. Type in the **Name** of the Node.  
(Optional) Type in a **description** of the node.
3. Click **Add**.  
The node is added to the object tree.

## Modifying a Node

Complete these steps to modify a node.

1. Select **Network Elements > Nodes > Node Type (SS7, GPRS, IP) > Node** to be modified.
2. Select **Modify**.
3. Make the necessary **modifications**.
4. Click **Modify**.  
A prompt appears stating that the node was modified.

## Deleting a Node

Complete these steps to delete a node.

**Note:** You must delete the Signaling Points (SPs) associated with the node before deleting it.

1. Select **Network Elements > Nodes > Node Type (SS7, GPRS, IP) > Node** to be deleted from the list.
2. Select **Delete** from the popup menu.
3. Click **OK** at the prompt, the node is deleted.

## About Non-node Network Elements

The non-node network element menu has three main categories:

- SS7 which is subdivided into
- Linksets
- Associations
- Links
- Signaling Points (SPs)
- GPRS which is subdivided into:
- Gb links
- Signaling Points (SPs)
- IP which is subdivided into:

- Signaling Points (SPs)

The differentiation between nodes and non-node network elements enables greater flexibility in working with linksets, links and associations.

Because network elements are so fundamental to the rest of the provisioning process, it is recommended that they be setup right after a site has been created.

## About SS7 Network Elements

The SS7 network element menu has four main categories:

- Linksets - linksets that are manually created (IMF) and discovered (PMF)
- Associations - are SCTP connections
- Links
- Signaling Points (SPs)

The differentiation between nodes and non-node network elements enables greater flexibility in working with linksets, links and associations.

### About Linksets

Linksets can exist as one or a combination of SS7 links each linkset can contain up to 16 links.

#### Creating a Linkset

Complete these steps to create a linkset.

**Note:** Signaling points must be configured before linksets can be created.

1. Select **Node > Signaling Point > Linkset > Add** from the Network Elements tree. The Add linkset screen opens shown in Figure 67: Add Linkset Screen.

Field	Description
Name	Required field used for the name of the linkset
Description	Optional field to describe the linkset
Reset button	Resets the screen to default values
Cancel button	Cancels the procedure
Next button	Opens the next screen/step of the sequence

TABLE 40: ADD LINKSET SCREEN

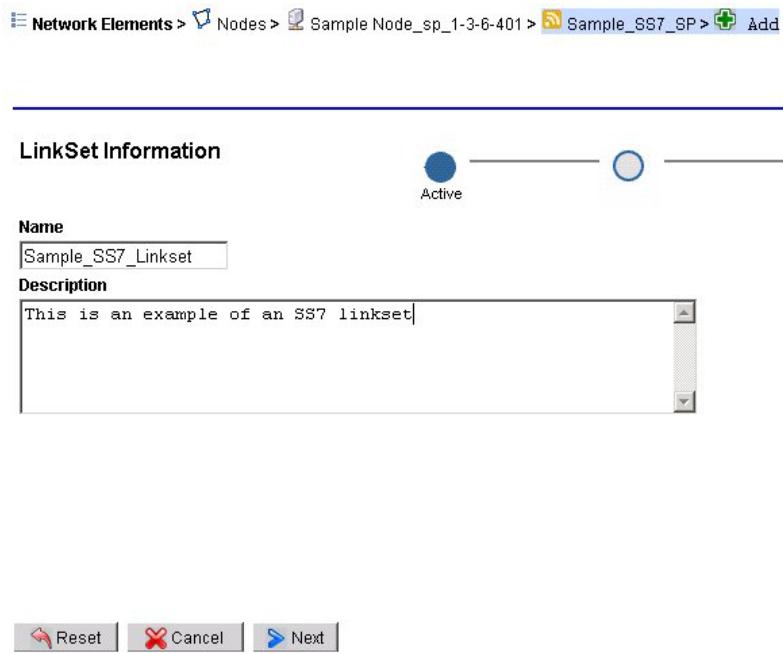


Figure 58: Add Linkset Screen

2. Type in the **Name** of the linkset.
3. (Optional) Type in a **description** of the linkset.
4. Click **Next**.

The *Signaling Points* screen opens shown in Figure 68: Associating A Linkset To Signaling Points.

Field	Description
SP1	This field contains the originating signaling point that the linkset belongs to
SP2	(Search field) Drop-down list for selecting the second signaling point
Previous button	Opens the preceding screen
Next button	Opens the next screen in the procedure

TABLE 41: SECOND ADD SIGNALING POINT SCREEN

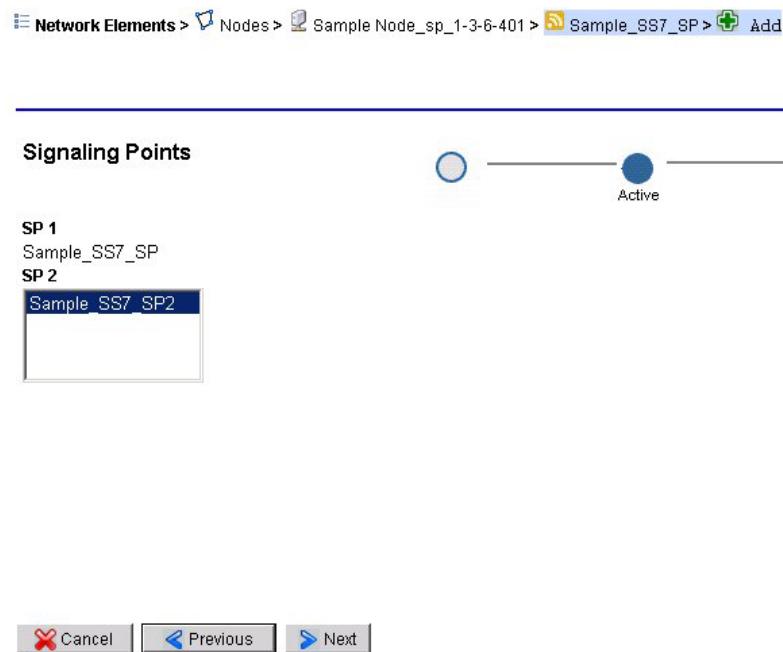


Figure 59: Associating A Linkset To Signaling Points

5. Select a **signaling point** in the SP2 field.
6. Click **Next**.

The *Additional Information* screen opens shown below.

Field	Description
Linkset Type	(Search field) Drop-down list for selecting the type of linkset
Resource ID Group (optional)	(Search field) Drop-down list for selecting a specific group
Add button	Saves the record to the system
Next button	Opens the Linkset Summary screen

TABLE 42: THIRD ADD SIGNALING POINT SCREEN

Additional Information

LinkSet Type: A

Resource ID Group: RID\_10

Cancel | Previous | Next | Add

Figure 60: Linkset Additional Information

7. Select a **Linkset Type**.
8. Select a **Resource ID Group**.  
(Auto RID or user-defined RID group see [About Resource ID Groups \(RID\)](#)).
9. Click **Add**.

The linkset is added to the signaling point shown below.

Linkset Summary						
	LinkSet Name	Description	Near End Point Code	Far End Point Code	Type	Resource ID Group
1	Sample_SS7_Linkset	This is an example of an SS7 linkset	Sample_SS7_SP	Sample_SS7_SP2	A	RID_10

Figure 61: Linkset List With New Linkset Added

#### Modifying a Linkset

To modify a linkset, Complete these steps.

**Note:** For discovered linksets, you can only modify the Name and Description fields.

1. Select the **linkset** to be modified.
2. Select **Modify**.
3. Make the necessary **modifications**.

4. Click **Modify**.

A prompt appears stating that the linkset was modified.

Deleting a Linkset

**Note:** If a linkset has links, then the links that belong to that linkset are also deleted at the same time.

**Note:** If a linkset is the only linkset in the signaling point, then the signaling point is also deleted what that linkset is deleted.

To delete a linkset, complete these steps.

1. Select the **linkset** to be deleted from the list.
2. Select **Delete**.
3. Click **OK** at the prompt, the linkset is deleted.

Modifying RID Group Settings when Modifying a Linkset

This feature enables you to set Auto-RID or Auto Reverse RID settings for a linkset (Auto RID or user-defined RID group see [About Resource ID Groups \(RID\)](#)). Complete these steps to modify the RID Group settings for a linkset.

1. Select the **Node > Linkset** to be modified.
2. Click **Modify**.
3. Click **next** until the Resource ID Group field appears.  
The RID groups defined in the system are displayed under the Resource ID Group drop-down.
4. Select **one** of the two automatically created RID groups.
5. Click **Modify** to save your changes.

**Note:** You should set the same RID group value for related linksets from mated pair STPs.

***Custom Name Override Function***

You can choose to have the custom name of a linkset to be the same as the Eagle name. When using this function the values are:

- **Enable** - the custom name is the same as the Eagle name
- **Disable** - the custom name is different from the Eagle name

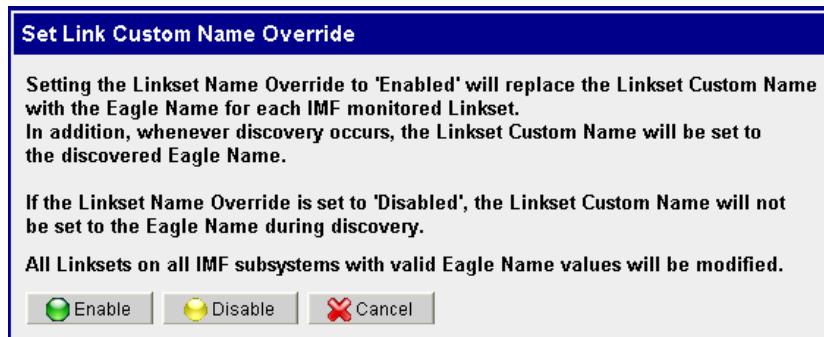


Figure 62: Custom Name Override Function Popup

The function is available on the Linksets list page tool bar.

***About SS7 Links***

SS7 Links belong to linksets. Links can be created only from manually created linksets, not discovered linksets. CCM also supports links defined on the Eagle E5-E1T1 card that are discovered by IMF. There is a column labeled "Interface Name" that designates the interface id value found during the discovery process.

**Note:** If a link(s) name is modified, all running feeds, that use the translation of the link names or pointcodes need to be deactivated and activated again for proper functioning.

### Creating an SS7 Link

To add a SS7 link Complete these steps.

1. Select **Network Elements > Node > Signaling Point > Linkset > Add** from the Object tree.

The *Add* screen opens shown in Figure 72: Add Screen.

Field	Description
Name	Required field to name the link
Description	Optional field that can describe the link
Cancel	Cancels the procedure
Next button	Opens the second phase of the setup procedure

TABLE 43: LINK NETWORK VIEW INITIAL SETUP SCREEN

Figure 63: Add Screen

2. Enter the link **Name**.
3. (Optional) Type in a **Description**.
4. Click **Next**.


The View Type Selection screen opens shown in Figure 73: View Type Selection Screen.

Field	Description
SLC	Drop-down list to choose an integer for the SLC
Interface	Drop-down list to choose the type of interface for the link
Transport Protocol	Drop-down list to choose the TP for the link
Cancel button	Cancels the procedure
Previous button	Returns you to the previous screen
Next button	Opens the Network/Link Summary screen
Add button	Add the link record to the linkset

TABLE 44: LINK NETWORK SETUP PHASE TWO

**Link Details**

<b>SLC</b>	<input type="button" value="3"/>
<b>Interface</b>	<input type="button" value="DS0A_56K"/>
<b>Transport Protocol</b>	<input type="button" value="UNDEF"/>

**Figure 64: View Type Selection Screen**

5. Select the **SLC** from the drop-down menu.
6. Select the **Interface** from the drop-down menu.
7. Select the **Transport Protocol** from the drop-down menu.
8. Click **Add**.

The link is added to the linkset shown below.

Records/Page 50 Page 1/1										
	Link Name	Description	SLC	Short Name	Status	Monitoring Application	Card	Port	Channel	Actions
1	Sample_SS7_Link	This is an example of an SS7 link	1	*2ccf	UnMonitored					

**Figure 65: View Type Selection Screen**

**Note:** Click Next to view the Summary screen

**Modifying an SS7 Link**

Follow these steps to modify a link.

**Note:** If a link(s) name is modified, all running feeds, that use the translation of the link names or point codes need to be deactivated and activated again for proper functioning.

1. Select **Node > Signaling Point > Linkset > Link** to be modified.
2. Make the necessary **modifications**.
3. Click **Modify**.

The record is modified.

**Deleting an SS7 Link**

Follow these steps to delete a link.

**Note:** If a linkset or an association has only one link, then if the link is deleted then the linkset or association is also deleted.

1. Select **Node > Signaling Point > Linkset > Link** to be deleted.
2. Click **Delete**.
3. Click **OK** at the prompt.

The link is deleted.

### Configuring SS7 Signaling Points

Signaling points provide a central nexus for SS7 linksets and links. Signaling points are discovered when the subsystem is created and all the elements are discovered. You can create signaling points only on non-discovered nodes.

**Note:** If a point code(s) is modified, all running feeds that use the translation of the link names or point codes need to be deactivated and activated again for proper functioning.

#### Creating a SS7 Signaling Point

Complete these steps to create a SS7 signaling point for a node.

1. Select **Network Elements >Nodes > SS7**.

The *Node List* screen opens showing the node list table with signaling point table.

Node List Table Data:

#	Node Name	Description of Node	Owner	State	Created
1	Node sp_66-67-47-401		cja	N	23/07/2009 10:14:33
2	KenzNode		tekelec	N	27/07/2009 13:42:02
3	Eagle MercurySTP		tekelec	N	20/07/2009 11:34:10
4	Node sp_1-1-101-401		tekelec	N	20/07/2009 11:34:10
5	Node sp_1-1-151-401		tekelec	N	20/07/2009 11:34:11
6	Node sp_66-67-40-401		tekelec	N	20/07/2009 12:11:11
7	Node sp_66-67-41-401		tekelec	N	20/07/2009 12:11:11

SS7 Signalling Points list for Node Node sp\_66-67-47-401 Table Data:

#	SP	Description	Node Name	Code	Flavour Country	Flavour Format	OID
1	sp_66-67-47-401		Node sp_66-67-47-401	66-67-47	ANSI-SS7	8-8-8	.1.3.6.1.4.1.4404.2

Figure 66: Add Signaling Point Screen

2. Click **Add** on the signaling point tool bar.

The *IP signaling point add* screen opens.

IP signaling point add screen fields:

- Name:
- Description:
- Point Code:  (dropdown menu: ANSI-SS7(8-8-8))

Figure 67: SS7 Signaling Point Add Screen

3. Enter the **Name** of the SS7 signaling point
4. (Optional) Enter a **Description**.
5. Select a **Point Code protocol** from the pull-down list.
6. Enter the **point code**.
7. Click **Add**.

The SS7 signaling point is added to the Node.

#### Modifying an SS7 Signaling Point

Complete these steps to modify a SS7 signaling point.

**Note:** If a point code(s) name is modified, all running feeds, that use the translation of the link names or point codes need to be deactivated and activated again for proper functioning.

1. Select **Network Elements >SS7 >SPs**

2. Select the **SS7 signaling point** to be modified.
3. Select **Modify**
4. Make the necessary **modifications**.
5. Click **Modify**.

A prompt appears stating that the signaling point was modified.

#### Deleting an SS7 Signaling Point

Complete these steps to delete an SS7 signaling point.

**Note:** When deleting a signaling point, all links and linksets associated with that signaling point are also deleted.

1. Select **Network Elements > SS7 > SPs**.
2. Select the **SS7 signaling point** to be modified.
3. Select **Delete**.
4. Click **OK** at the prompt.

A prompt appears stating that the signaling point was deleted.

## About GPRS Network Elements

GPRS (General Packet Radio Service) non-node network element menu has two categories:

- Gb links
- Signaling Points (SPs)

The differentiation between nodes and non-node network elements enables greater flexibility in working with linksets and links and associations.

Because network elements are so fundamental to the rest of the provisioning process, it is recommended that they be setup right after a site has been created.

#### **About Gb Links**

Gb links belong to GPRS nodes.

#### Adding a Gb Link

Complete these steps to add a Gb link to a GPRS signaling point.

1. Select the **GPRS signaling point** that needs a Gb link.
2. Select **Add** from the pop-up menu.

The *Add Gb link* screen opens shown below.

Network Elements > Nodes > Sample Node\_sp\_1-3-6-401 > Sample\_GPRS\_SP > Add

**Signal Point**  
Sample\_GPRS\_SP

**Name**  
Sample\_GPRS\_Linkset

**Description**  
This is an example of a GPRS linkset

**Interface**  
E1T1\_56K

**PCM ID**  
50

**Buttons:** Reset | Cancel | Add

Figure 68: Add Gb Link Screen

Table below describes the Gb link add GUI:

Field	Description
Name	A required alphanumeric field that shows the name of the link
Description	An optional text box used for providing any specific information about the link
Interface	A required pull-down menu for selecting the interface for the link
PCM ID	A required numeric (0-99) field for entering the PCM ID
Add button	Adds the link information to the system
Cancel button	Cancels the procedure
Reset button	Resets the screen to the original state

TABLE 45: GB ADD SCREEN

3. Type in a **Name** for the Gb link.
4. (Optional) Type in a **Description** for the link.
5. Select an **Interface** for the link.
6. Type in a **PCM ID** for the link.
7. Click **Add**.

The link is added to the signaling point.

#### Modifying a Gb Link

Follow these steps to modify a link.

1. Select **Node > GPRS Signaling Point > Link** to be modified.
2. Make the necessary **modifications**.
3. Click **Modify**.

The record is modified.

#### Delete a Gb Link

Follow these steps to delete a link.

1. Select **Node > GPRS Signaling Point > Link** to be deleted.
2. Click **Delete**.
3. Click **OK** at the prompt.

The link is deleted.

### About GPRS Signaling Points

CCM enables you to configure and manage General Package Radio Service (GPRS) signaling points. GPRS signaling points are discovered when the network is configured. You can create signaling points only on network nodes that you have created, not from discovered nodes. You can only modify, delete and filter discovered signaling points.

#### Creating a GPRS Signaling Point

Complete these steps to create a GPRS signaling point.

**Note:** You can only create signaling points from GPRS nodes that you have created, not discovered.

1. Select **Network Elements >Node > GPRS**. The *Nodes list* screen opens with the signaling points list table on the bottom of the screen.

Figure 69: Nodes and Signaling Points List Screen

2. Click **Add** on the signaling points tool bar.  
The *GPRS signaling point add* screen opens

Figure 70: GPRS Signaling Points Add Screen

3. Type the **Name** of the signaling point.
4. (Optional) Type in a **Description**.
5. Type in a **SGSN ID** (this is the number that identifies the Serving GPRS Support Node).  
**Note:** The ID needs to be a positive integer.
6. Click **Add**. The GPRS signaling point is added to the Node.

#### Modifying a GPRS Signaling Point

Complete these steps to modify a GPRS signaling point.

1. Select the **GPRS signaling point** to be modified.
2. Select **Modify**.
3. Make the necessary **modifications**.
4. Click **Modify**.  
A prompt appears stating that the signaling point was modified.

#### Deleting a GPRS Signaling Point

**Note:** When deleting a signaling point, all links and linksets associated with that signaling point are also deleted.

To delete a GPRS signaling point, complete these steps.

1. Select the **GPRS signaling point** to be deleted from the list.
2. Select **Delete**.
3. Click **OK** at the prompt, the signaling point is deleted.

## About IP Network Elements

The IP network element menu contains IP signaling points. These signaling points enable the proper flow of IP packets.

The differentiation between nodes and non-node network elements enables greater flexibility in working with linksets and links and associations.

Because network elements are so fundamental to the rest of the provisioning process, it is recommended that they be setup right after a site has been created.


### About IP Signaling Points

CCM enables you to configure IP signaling points. Like other signaling points, IP signaling points are discovered when the network is created. You can only modify, delete and filter IP signaling points.

#### Creating an IP Signaling Point

Complete these steps to create an IP signaling point for a node.

1. Select **Network Elements >Nodes > IP**. The *Node List* screen opens showing the node list table with signaling point table.

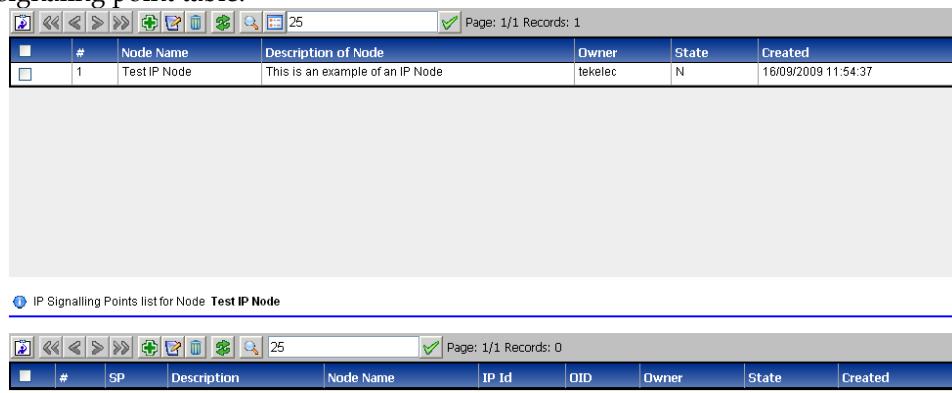

The image contains two screenshots of the CCM interface. The top screenshot shows the 'Node List' screen with a table header: '#', 'Node Name', 'Description of Node', 'Owner', 'State', and 'Created'. A single row is shown with the value '1' in the '#' column, 'Test IP Node' in 'Node Name', 'This is an example of an IP Node' in 'Description of Node', 'tekelec' in 'Owner', 'N' in 'State', and '16/09/2009 11:54:37' in 'Created'. The bottom screenshot shows the 'IP Signalling Points list for Node Test IP Node' screen with a table header: '#', 'SP', 'Description', 'Node Name', 'IP Id', 'OID', 'Owner', 'State', and 'Created'. The table is currently empty.

Figure 71: Add Signaling Point Screen

2. Click **Add** on the signaling point tool bar to open the IP signaling point screen.
3. Enter the **Name** of the IP signaling point
4. (Optional) Enter a **Description**.
5. Click **Add**.

The IP signaling point is added to the Node.

#### Modifying an IP Signaling Point

Complete these steps to modify a IP signaling point.

1. Select **Network Elements >IP >SPs**
2. Select the **IP signaling point** to be modified.
3. Select **Modify**
4. Make the necessary **modifications**.
5. Click **Modify**.

A prompt appears stating that the signaling point was modified.

#### Deleting an IP Signaling Point

Complete these steps to delete an IP signaling point.

Note: When deleting an association, all mappings to that association will be broken.

1. Select the **IP signaling point** to be deleted.
2. Select **Delete**.
3. Click **OK** at the prompt.

The signaling point is deleted.

### ***About IP Cards***

CCM supports E5-ENET card running IPSG or IPGW for either STC or FastCopy capability. Cards can support either STC-style monitoring or FastCopy monitoring but not both. Cards configured on CCM show this information on the Card list screen.

- Card Number - shows the order that the card was configured. The first card configured on the system would have the number "1", the second "2" and so on.
- Card Name - a text field that provides the name of the card.
- Capacity - shows the capacity in TPS that the card can handle. This information is utilized in the SigTran ProDiag Application for monitoring purposes.

### ***IP Card Functional Specifications***

The PIC system supports both STC-style and Fast Copy on IMF with both Eagle IPGW as well as IPSG cards.

This table shows the functional expectations on a per card basis.

**Note:** The cards supported depend on the version of Eagle that is installed on the system. This list is for Eagle release 42.

Application	Hardware	GPL	Protocols	ANSI/ITU	Monitoring Type
SS7IPGW	SSEDCM	SS7IPGW	M3UA	ANSI	STC-STYLE
SS7IPGW	E5-ENET	IPGHC	SUA / M3UA	ANSI	STC-STYLE or Fast Copy
IPGWI	SSEDCM	IPGWI	M3UA	ITU	STC-STYLE
IPGWI	E5-ENET	IPGHC	SUA / M3UA	ITU	STC-STYLE or Fast Copy
IPSG	E5-ENET	IPSG	M2PA / M3UA	ANSI+ITU	STC-STYLE or Fast Copy

**TABLE 46: IP CARD SPECIFICATIONS**

### ***Adding an IP Card***

Complete these steps to add an card to the system.

1. Select **Network Elements >IP > Cards**. The Card list screen opens showing the cards configured for the system.
2. Click **Add** on the tool bar.
3. Enter the **Name** of the IP card
4. (Optional) Enter the **Capacity** of the card in (TPS).
5. Click **Add**.
6. The card is added to the system.

**Note:** Apply Changes to have the card become functionally available for monitoring by the SigTran Prodiag application.

### **Modifying an IP Card**

Complete these steps to modify an IP card.

1. Select **Network Elements >IP >Cards**
2. Select the **Card** to be modified from the list.
3. Click **Modify** from the tool bar.
4. Make the necessary **modifications**.
5. Click **Modify**.

A message appears stating that the card was modified.

### Deleting an IP Card

Complete these steps to delete an IP card.

**Note:** When deleting an association, all mappings to that association will be broken.

1. Select the **Card** to be deleted.
2. Select **Delete**.

**Note:** A prompt will appear stating the following:

This action will delete the third party card from the Associations mapped with it. Please review the following:

The card (name) can not be deleted, mapped with # association(s)

Are you sure you want to delete this Card?

3. To delete the card, click **OK**.

### *About Application Servers*

CCM allows for the configuration of IP Application Servers (AS). An AS is a logical entity serving a specific Routing Key. An example of an Application Server is a virtual IP database element handling all requests for an SCCP-user. The AS contains a set of one or more unique Application Server Processes (ASPs), where one or more is normally actively processing traffic.

**Note:** For IMF subsystems the network elements are automatically discovered and cannot be created manually. PMF subsystems are manually discovered and their network elements must be created manually.

### Adding an Application Server

Complete these steps to add an application server (AS) to the system.

Note: For each AS, the associations mapped to it can also be managed from the bottom table.

1. Select **Network Elements >IP > Application Servers**.

The *Application Server List* screen opens showing the AS list table on top with its mapped associations table on the bottom.

2. Click **Add** from the tool bar.  
The add screen opens.
3. Enter the **Name** of the AS
4. (Optional) Enter a **Description**.
5. Enter a valid **Routing Context** for the AS.
6. Click **Add**.

The association server is added to the system.

**Note:** For the changes to take effect, right-click on the PMF subsystem and select **Apply Changes** from the menu.

### *Mapping Associations to an Application Server*

Complete these steps to map an association to an application server (AS).

1. Select **Network Elements >IP > Application Servers**.

The *Application Server List* screen opens showing the AS list table on top with its mapped associations table on the bottom.

2. Select the **AS** to have the association.

**Note:** If the AS needs to be added, first click **Add** on the tool bar and follow the steps to add an AS.

3. Click **Show Details** on the tool bar.

4. From the bottom table, click **Add** on the tool bar.
5. Enter the **Name** of the Association.
6. Select the **Protocol** (SUA, M2UA or M3UA).
7. Select the **PMF Server** that houses the association.

**Note:** You must add a PMF server. See [Adding a PMF server](#).

8. Enter the **Maximum Capacity** for the association.
9. Enter the **End Points**
  - a. Enter the **Source Port**.
  - b. Enter the **Destination Port**
10. Enter the **Source IP Address(es)**
11. Click **Add** to List.  
Repeat steps 10-11 to add multiple addresses.
12. Enter the **Destination IP Address(es)**.
13. Click **Add** to List.  
Repeat steps 12-13 to add multiple addresses.
14. Click **Finish**.

**Note:** For the changes to take effect, click **Apply Changes**.

#### *Modifying a Mapped Association*

Complete these steps to modify an Application Server (AS).

1. Select **Network Elements >IP > Application Servers**.
2. Select the **AS** to be modified.
3. Click **Modify** on the tool bar.
4. Make the necessary **modifications**.
5. Click **Modify** at the bottom of the screen.  
A prompt appears stating that the signaling point was modified.

**Note:** For the changes to take effect, right-click on the PMF subsystem and select **Apply Changes** from the menu.

#### *Deleting an Association Mapped to an Application Server*

Complete these steps to delete an association mapped to an application server.

**Note:** The links and application servers will no longer exist if the association is deleted.

1. Select **Network Elements > IP > Application Servers**.
2. Select the **Application Server** that has the association.
3. From the bottom table, select the **association** to be deleted..
4. Click **Delete** from the tool bar.
5. Click **OK** at the prompt. The association is deleted.

**Note:** For the changes to take effect, right-click on the PMF subsystem and select **Apply Changes** from the menu.

#### *Modifying an Application Server*

Complete these steps to modify an Application Server.

1. Select **Network Elements >IP >Application Server**.
2. Select the **Application Server** to be modified.
3. Select **Modify**
4. Make the necessary **modifications**.
5. Click **Modify**.

A prompt appears stating that the Application Server was modified.

**Note:** For the changes to take effect, right-click on the PMF subsystem and select **Apply Changes** from the menu.

### Deleting an Application Server

Complete these steps to delete an application server.

**Note:** When deleting an association, all mappings to that association will be broken.

1. Select **Network Elements > IP > Application Server**.
2. Select the **Application Server** to be deleted.
3. Select **Delete**.
4. Click **OK** at the prompt.

**Note:** For the changes to take effect, right-click on the PMF subsystem and select **Apply Changes** from the menu.

### **About Associations**

Associations refer to SCTP associations. Associations provide the transport for the delivery of SCCP-User protocol data units and SUA layer peer messages. In their simplest form, they are combinations of links that are discovered from an IMF subsystem but can exist as PMF (utilizing traffic classifications) elements. Network element associations are discovered as part of the site creation process.

**Note:** For IMF subsystems the network elements are automatically discovered and manual creation of elements is not allowed. On the other hand, all elements on a PMF subsystem require manual creation.

### Showing Details of an Associations (IMF or PMF)

Complete these steps to show the details (endpoints, associations or links mapped to either an IMF or a PMF association).

1. Select **Network Elements > IP > Associations > IMF or PMF** (depending on what type of association is being researched).
2. From the list screen, select the **Association** to be viewed.
3. Click **Details** from the tool bar.

The *mappings* for that association appear in the bottom table.

### Deleting Associations (IMF and PMF)

Complete these steps to delete either an IMF or a PMF association.

**Note:** When deleting an association, all mappings to that association will be broken.

1. Select **Network Elements > IP > Associations > IMF or PMF** (depending on what association needs to be deleted).
2. From the list screen, select the **Association** to be deleted.
3. Click **Delete** from the tool bar.
4. Click **OK** at the prompt.

**Note:** For the changes to take effect, right-click on the PMF subsystem and select **Apply Changes** from the menu.

### **About Application Servers Processes**

CCM allows the monitoring of Application Server Processes. An Application Server Process (ASP) serves as an active or backup process of an Application Server, for example as a distributed signaling node or database element. Examples of ASPs are MGCs, IP SCPs, or IP-based HLRs. An ASP contains an SCTP endpoint and may be configured to process traffic within more than one Application Server.

**Note:** For IMF subsystems the network elements are automatically discovered and manual creation of elements is not allowed. On the other hand, all elements on a PMF subsystem require manual creation.

### Viewing Application Server Processes

The list screen for configured application server processes (ASPs) can be viewed in the ASP list screen.

Selecting **Network Elements > IP > Application Server Process** opens the list page. The ASP table contains the following information.

- ASP Name - the name of the process
- Association Name - the name of the association mapped to the ASP
- Application Server Name - the name of the Application Server that the association is related to.
- Removed - shows the date and time that the process was removed through synchronizing the system.

## Chapter 7: Network View Configuration

### About Network Views

You can access Session and Link Network Views by selecting the Network View perspective from the directory tree. Then expand the tree to view these three objects. Session views can be hierarchical and can be one of two types:

- Network Views - A network, hierarchy or networks or session view.
- Link Network Views - A network view containing one or more links of the type - SS7 linkset, Gb links and Input streams.

The Network Views perspective provides a means of logically grouping SS7 linksets, Gb links, Input streams and xDR sessions used by other configuration operations as well as those operations used by applications.

Network views are hierarchical in that one network view can contain other network views, for example, a network view of a country could contain regional networks that contain state networks that contain city networks.

The figure shows the Network View Perspective object tree.



Figure 72: Network View Perspective

### Creating Network Views

Network views function as an organizing entity. In complex networks, you can have several levels of networks (for more information, see [Nesting Network Views](#)).

Complete these steps to create a network view.

1. Select **Network View > Session Views > Add** from the *Object tree*.  
The *Initial Setup* screen opens shown in the figure below.

Initial Setup

Network View Name  
Sample\_Container\_View

Description  
This is an example of a container Network view that will have children.

Active

Reset Cancel Next

Figure 73: Initial Setup Screen

2. Type in **Network View Name**.
3. (Optional) Type in a **Description**.
4. Click **Next**.

The *View Type Selection* screen opens shown below.

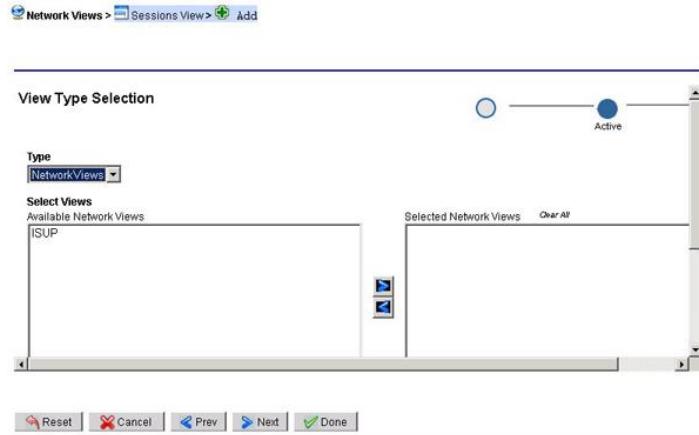


Figure 74: View Type Selection Screen

5. Select **Network Views** from the Type drop-down menu.
6. Click **Done** without selecting any available networks.

You have created a container network view that is empty and can function as a container for other networks within it.

**Note:** See [Nesting Network Views](#) for steps to include existing networks in the view.

## Creating Network Session Views

You can access Session and Link Network Views by selecting the Network View option from the directory tree. Then expand the tree to see these three objects.

Like Container Network views, session views can also be hierarchical. Complete these steps to create a session view

1. Select **Network Views > Sessions View**.
2. Click **Add** from the tool bar.
3. Type in **Network View Name**.
4. (Optional) Type in a **Description**.
5. Click **Next**.
6. From the Type drop-down menu select **Sessions**.
7. Click the **Session Selector Filter** icon on the far right of the tool bar.
8. From the Session Selector Filter screen, select one or more **Dictionaries**.
9. Select the **Site(s)**.
10. Click **Apply Filter** to filter on specific sessions and/or sites.
11. Click **Select**.

The system searches the dictionaries and sites. Any matches for the filter are shown in the Filtered Sessions field.

12. Click **Close** to close the screen.
13. Click **Done** without selecting any available networks.

You have created a session view.

## Nesting Network Views


Container-based network views function as a shell that contains other networks. This type of network is helpful in organizing very large networks that contain other networks. For example, one might have a region network that contains several state networks which in turn contain city networks. Creating a container network enables you to create hierarchies for greater specificity in analysis and troubleshooting.

Complete the steps in **Creating Network Views** to create your parent (container) view. Once you have created the networks for your system. You can begin to “nest” the networks to form hierarchies.

Follow these steps to create children of the parent.

1. Select **Network View > Session Views > List**.

The *Network View List* screen opens.

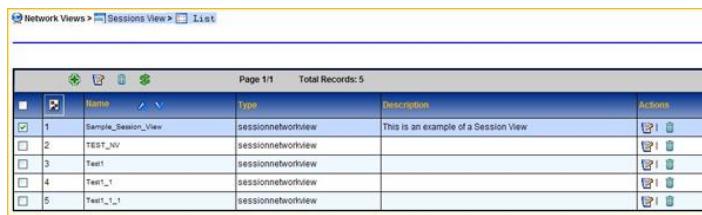

	Name	Type	Description	Actions
<input checked="" type="checkbox"/>	1 Sample_Session_View	sessionnetworkview	This is an example of a Session View	 
<input type="checkbox"/>	2 TEST_NV	sessionnetworkview		 
<input type="checkbox"/>	3 Test1	sessionnetworkview		 
<input type="checkbox"/>	4 Test1_1	sessionnetworkview		 
<input type="checkbox"/>	5 Test1_1_1	sessionnetworkview		 


Figure 75: Network View List Screen

2. Select the **Parent Network View** from the list.

3. Click **Modify**.

The *Network View* screen opens.

4. Click **Next** to open the View Type Selection screen.

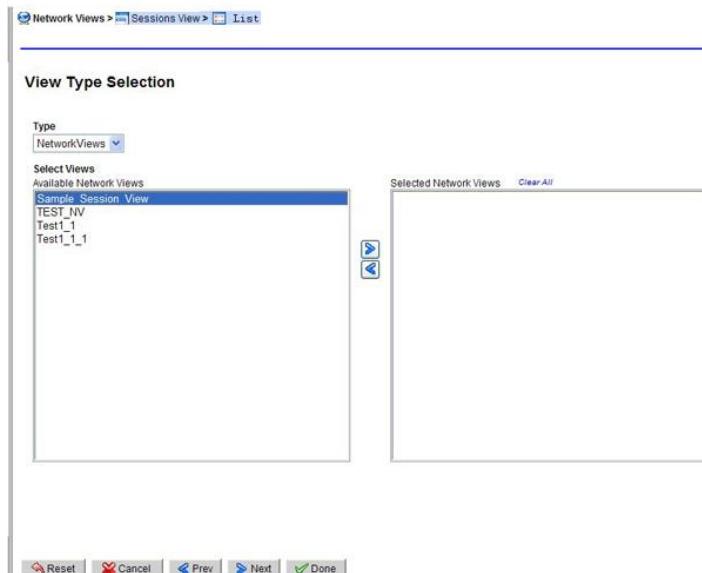

The screen shows a 'View Type Selection' interface. On the left, a 'Select Views' panel lists 'Available Network Views': Sample\_Session\_View, TEST\_NV, Test1\_1, and Test1\_1\_1. The 'Sample\_Session\_View' is selected and highlighted in blue. On the right, a 'Selected Network Views' panel contains the selected view. At the bottom, there are buttons for 'Reset', 'Cancel', 'Prev', 'Next', and 'Done'.

Figure 76: View Type Selection Screen

5. Select a **network(s)** that will belong to the container network.
6. Click the **right-arrow** to place the networks into the Selected Networks field.
7. Click **Done**.

You created a nested or hierarchical network view.

## About Network Views that Separate xDR Sessions

You can access Session and Link Network Views by selecting the Network View perspective from the directory tree. Then expand the tree to view these three objects. Session views can be hierarchical and can be one of two types:

- Network Views - A network, hierarchy or networks or session view.
- Link Network Views - A network view containing one or more links of the type - SS7 linkset, Gb links and Input streams.

The Network Views perspective provides a means of logically grouping SS7 linksets, Gb links, Input streams and xDR sessions used by other configuration operations as well as those operations used by applications.

Network views are hierarchical in that one network view can contain other network views, for example, a network view of a country could contain regional networks that contain state networks that contain city networks.

The figure shows the Network View Perspective object tree.



Figure 77: Network View Perspective

## About Link-based Network Views

Link-based network views (SS7, Gb, IP) can be grouped together to create a view of the network that a system administrator uses for routing link data to the IXP. All links in an SS7 linkset are considered part of any network view containing the linkset. If a linkset is part of a network view and a new link is added to that linkset either manually or through discovery, the new link also automatically becomes part of the network view.

## Configuring link Views

You can add three types of links to a link-based network view using CCM.

Note: Link views contain only linksets and are the lowest level of network view that can be created.

- SS7
- GB
- Traffic Classifications (IP streams)

## Creating Link-based Network Views

Complete these steps to add a leaf network view.

1. Select Network View > Link View> Add.  
The *Initial Setup* screen opens shown in the figure shown below.

Initial Setup

Network View Name: Sample\_Link\_View

Description: This is an example of a lnk view

Buttons: Reset, Cancel, Next

Figure 78: Link Network View Create Info-Initial Setup

2. Type in **Network View Name**.
3. (required) Type in a **Description**.
4. Click **Next**.  
The *View Type Selection* screen opens shown in Figure 88: View Type Selection Screen.
5. Select **Links** from the drop-down menu. The link type screen opens shown below.

View Type Selection

Type: Links

Select Links

	Name	Type	Actions
--	------	------	---------

Buttons: Reset, Cancel, Prev, Next, Done

Figure 79: View Type Selection Screen

6. Click a **link type** from the toolbar.

**Note:** To add a specific linkset or link type, click on one of the links below.

- a. Adding an SS7 Linkset to a Link View
- b. Selecting Gb Links for a Link View
- c. Selecting Traffic Classifications
- d. Adding SS7 Linksets and Gb Links

7. After you have added the links you need, click **Next**.  
The *Add Link Network View* screen opens shown below.

Item	Option	Description
------	--------	-------------

Field	Type	
	Type	Pull-down menu to select between Network or Links
Toolbar		
	Delete	Deletes a existing link that is selected
	Select SS7 Linksets	Opens Add SS7 Linkset screen
	Select Gb Links	Opens Add Gb link screen
	Select IP Streams	Opens Add IP Stream screen
	Select SS7 Linksets & Gb Links	Opens Add SS7 Gb link screen

TABLE 47: LINK NETWORK VIEW FIELDS

### Adding an SS7 Linkset to a Link View

Complete these steps to add an SS7 linkset to your link view.

Item	Description
Point Code	List of available point codes
Type	Point Code type (A-F)
Resource ID	Alphanumeric field to declare an ID for the linkset
Sites	List field of available sites on point code
Apply Filter	Begins search for parameters selected above
Filtered SS7 Linksets	Lists linksets found.
Select & Close	Selects chosen links
Close	Closes the screen

TABLE 48: SELECT SS7 LINKSET SCREEN

1. Click **Select SS7 Linksets**

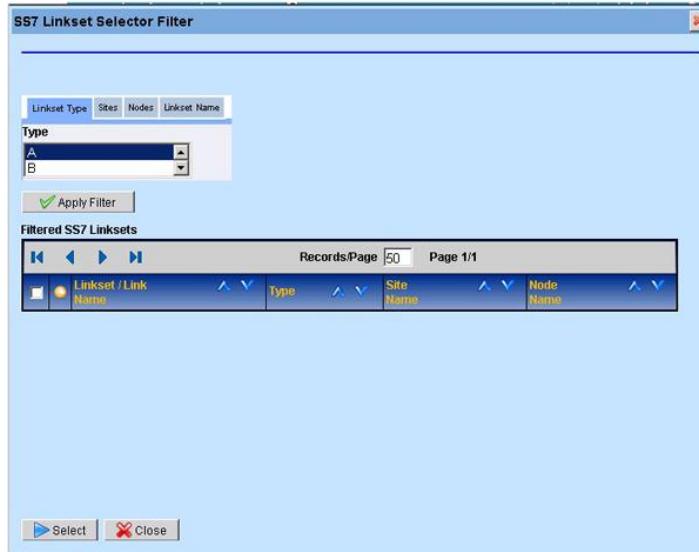


Figure 80: SS7 Linkset Selector Filter Screen

- a. Select the **Linkset Type** from the Linkset type tab.
- b. Select the **Site** from the Sites tab shown in the figure below.

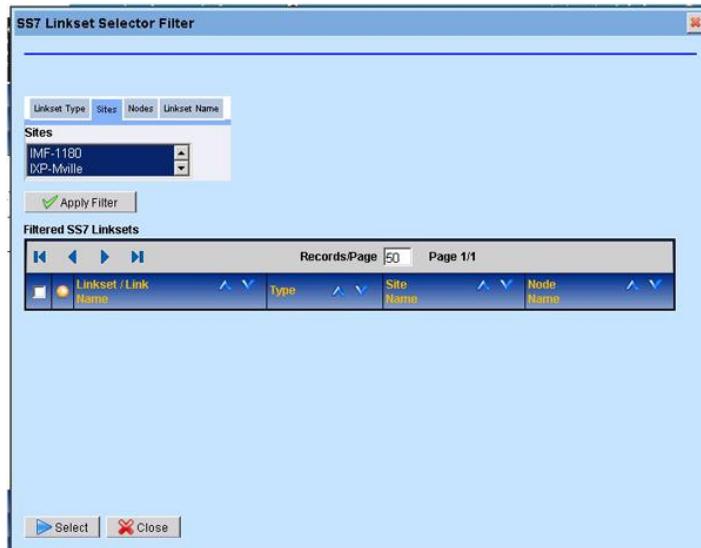


Figure 81: Sites Screen

c. Select the **Node(s)** from the Nodes tab shown in the figure below.

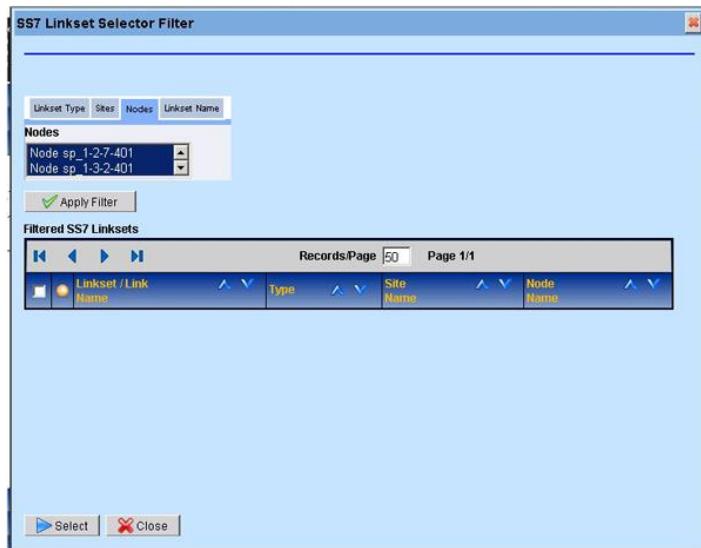


Figure 82: SS7 Node Screen

d. Assign a **Linkset Name** from the Linkset Name tab.

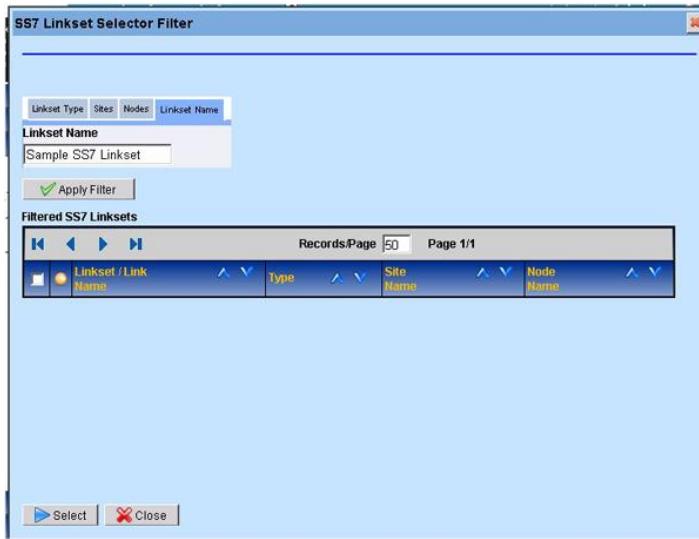


Figure 83: SS7 Linkset Name Screen

- a. Click **Apply Filter** to apply the filter to the linkset.
- b. Click **Select**.  
The *View Type Selection* screen opens with the selected linkset(s).

2. Click **Close**.  
The *SS7 linkset* is added to the link view.

### Selecting Gb Links for a Link View

Complete these steps to select a Gb link to a link view.

1. Click **Gb link** from View Type Selection screen shown in Figure 93: View Type Selection Screen.  
The *Gb Link Selector Filter* shown below opens.

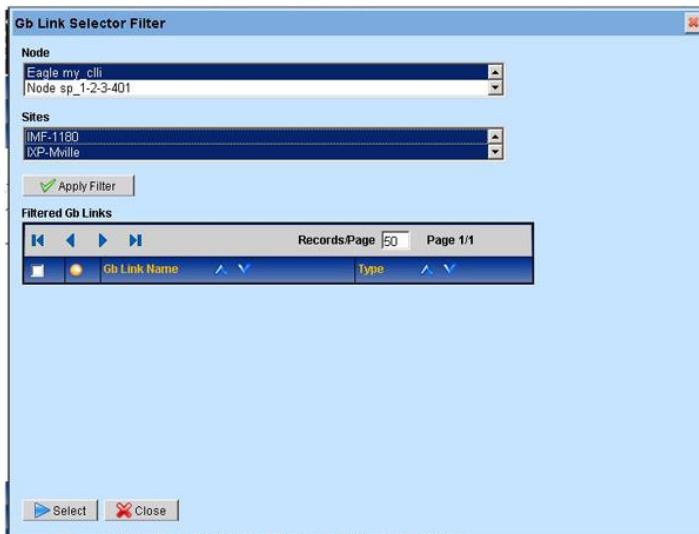


Figure 84: View Type Selection Screen

Item	Description
Node	Shows all the nodes within a network view
Sites	Shows all the sites available in a network view
Apply Filter	Begins search for available Gb links
Filtered Gb Links	Lists all the available links
Select & Close	Selects chosen links
Close	Closes the screen

TABLE 49: SELECT GB LINKS SCREEN

2. Select a **Node**.
3. Select the **Site(s)**.
4. Click **Apply Filter**.  
The search begins.
5. Select the **Gb links** for the link view.
6. Click **Select**.  
The Gb link is selected.
7. Click **Close**.  
The links are added to the network view.

## Selecting Traffic Classifications

Complete the following steps to select a Traffic Classification.

1. Click **Select Traffic Classifications** from View Type Selection screen tool bar shown below. The *Traffic Classification* screen opens.

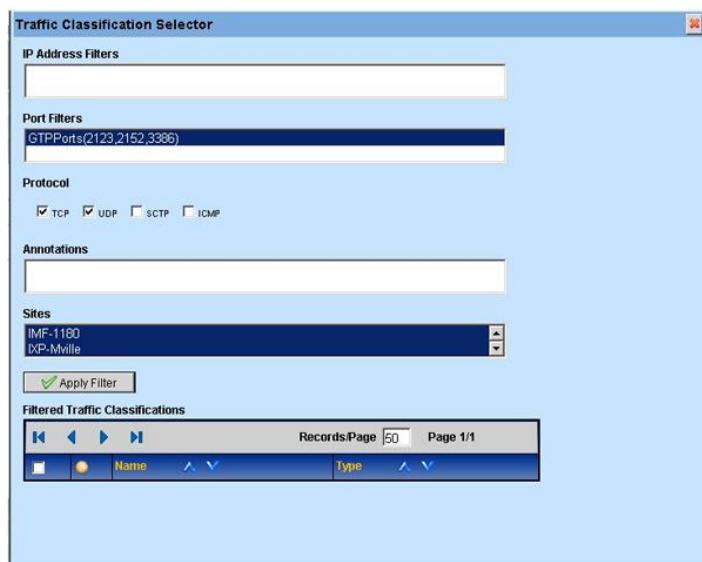


Figure 85: View Type Classification Screen

Item	Description
IP Address Filters	Lists available IP Addresses
Port Filters	Lists available Port Filters
Protocols	Check boxes for the following protocols <ul style="list-style-type: none"> <li>• TCP</li> <li>• UDP</li> <li>• SCTP</li> <li>• ICMP</li> </ul>
Annotations	A specific label or title you add for identification
Apply Filter	Begins search for Input streams
Traffic Classification List	Lists Traffic classifications found in search
Select	Selects chosen links
Close	Closes the screen

TABLE 50: IP STREAM SELECTOR FILTER FIELDS

2. Select **IP Address Filters** from the list.
3. Select the **Port Filters** from the list.

4. Select the **Protocol(s)** for the filter.
5. Click **Apply Filter** to begin the search for available traffic selections.
6. Select the **traffic classification** from the list.
7. Click **Save** to save the selection to the link view.
8. Click **Close** the screen closes.

## Adding SS7 Linksets and Gb Links

Complete the following steps to add SS7 linksets & Gb links.

1. Click **Select SS7 and Gb links** from View Type Selection tree.  
The *Link Selector* filter opens.

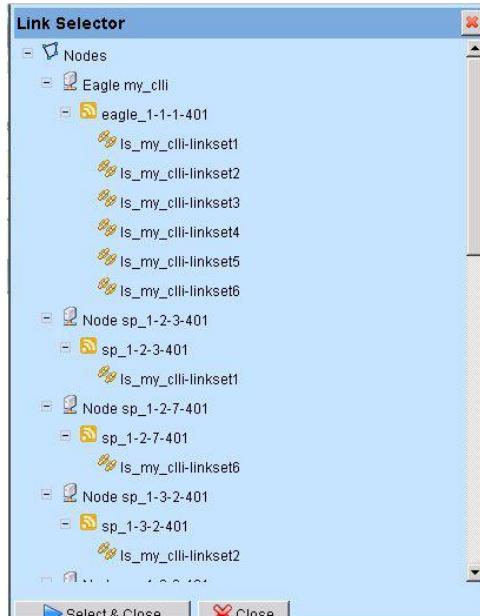


Figure 86: Link Selector Screen

1. Expand the **Object Tree**.
2. Select the **Link**.
3. Click **Save & Close**.

The *link* is selected.

## Modifying Link-based Network Views

Complete these steps to modify a link-based network view.

1. Select the **network view** to be modified.
2. Select **Modify** from the popup menu.
3. Make the necessary **modifications**.
4. Click **Done**.

The *network view* record is updated.

## Deleting Link-based Network View

Complete these steps to delete a link-based network view.

1. Select the **network view** to be deleted.
2. Select **Delete** from the popup menu.
3. Click **OK** at the prompt.

The *session* is deleted.

## Chapter 8: xMF Acquisition

### About the Acquisition Perspective

Once an xMF (IMF/PMF) subsystem is created and its applications and network elements are discovered, you configure the subsystem in the Acquisition perspective.

In the Acquisition perspective, only the sites that have xMF subsystems are visible in the Acquisition object tree (shown in the figure below). In this perspective you can:

- Create monitoring groups linked to monitor linksets
- Create PDU Filters
- Configure Alarms
- Manage Resource ID Groups
- Configure Q.752 counters (Routes Dataflows to Thirdparty ((external)) Data Feeds)



Figure 87: Acquisition Perspective Overview

### About xMF Subsystem Management

The general maintenance and configuration options for a specific xMF subsystem are accessed by right-clicking on the selected xMF subsystem. (Select **Sites > subsystem**) The pop-up menu opens.

The functions are briefly described in the table.

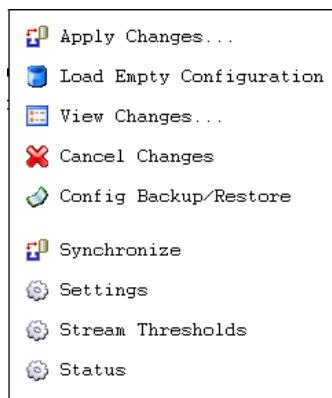


Figure 88: xMF Subsystem Pop-Up Menu

Option	Description
Apply changes	enables you to apply any changes that have been made to the particular xMF subsystem. You are notified if there are any changes to the system and you use this option to accept the changes.
Load Empty Configuration	enables you to remove the existing configuration for the subsystem.
View changes	enables you to view any changes that have occurred in the subsystem in order to

Option	Description
	accept the change or cancel them.
Cancel changes	Enables you to cancel any changes that have been made to the subsystem. <b>Note:</b> Routing is also deleted after this operation is performed.
Config backup/restore	Enables you to backup or restore a previous backup configuration in case of system failure. <b>Note:</b> Routing is also deleted after this operation is performed.
Synchronize	Enables you to discover (or re-discover) any applications or network elements on the subsystem.
Settings	Enables you view and set some xMF parameters, such as PDF Idb Storage and Threshold Kbps, on a per-subsystem basis.
Stream Thresholds	Enables you to set the limit for traffic passing through different destinations within an xMF subsystem.
Status	Enables you to view the status of the system

TABLE 51: XMF SUBSYSTEM POP-UP MENU OPTIONS

## Synchronizing an xMF Subsystem

Using the synchronize option, you can discover any new applications or changes to the xMF subsystem. Complete these steps to synchronize an xMF subsystem.

1. Select **Acquisition > Sites > xMF subsystem (PMF or IMF)** shown below.



Figure 89: Selected XMF Subsystem

2. Right click on the **Subsystem**.

3. Select **Synchronize**.

The system begins the process. After completion, the status screen opens shown in the figure below.

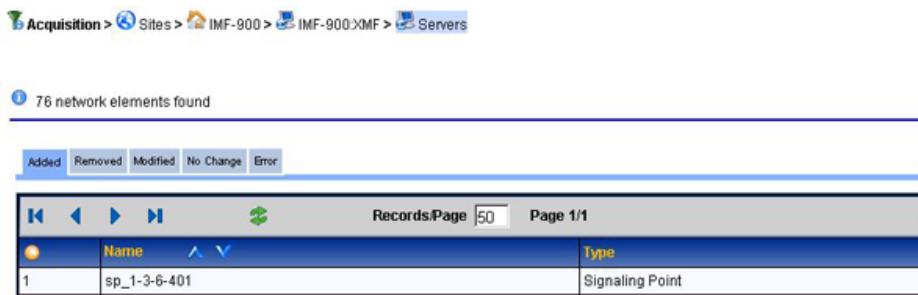


Figure 90: Synchronization Results Screen

You are provided the following information.

- How many elements were found in the subsystem
- What elements were added
- What elements were removed
- What elements were modified
- What elements had no changes
- Any errors that occurred during synchronization

In addition, if it is a PMF subsystem, then you are also notified as to how many cards were found.

## Applying Changes to an xMF (IMF) Subsystem

Once changes have been made to an IMF subsystem, click **Apply Changes** on the subsystem right-click menu. The results screen opens:



Figure 91: Apply Changes Screen

The screen has two tabs.

- Configuration Changes - shows all the actions during the process.
- Warnings - shows the changes that may have errors.

**Note:** In the process of applying changes to an IMF subsystem, the changes are first validated to make sure that no limits have been exceeded. This is especially important for monitoring groups. If the maximum of 512 links and associations has been exceeded, when changes are applied, there will be a warning prompt that appears stating that there is an invalid or exceeded capacity of monitoring groups and it must be corrected before applying changes. The monitoring groups in question will be listed on the prompt. In this situation, the monitoring group(s) in question must be modified. For more information see [Modifying Monitoring Groups](#).

## Viewing Changes to an xMF Subsystem

Complete these steps to view the most recent synchronization and any pending changes on an xMF subsystem.

1. Select **Acquisition > Site >xMF subsystem**.
2. From the subsystem right-click menu select **View Changes**.  
The screen shows the time and date of the last synchronization and any pending changes in the bottom table.

## Enabling and Disabling xMF Subsystem Automatic Failover

Complete these steps to enable or disable the automatic failover for an xMF subsystem.

1. Select **Acquisition > Site >xMF subsystem**.
2. Right-click and select **Enable / Disable Auto Failover**.

**Note:** Enabling and disabling an IXP subsystem can also be performed from the Actions column in the IXP list screen.

3. Select either **Enable (default setting)** or **Disable**.
4. Click **Done**.

**Note:** For the changes to take effect, click **Apply Changes**.

## Loading an Empty Configuration on to an xMF Subsystem

Complete these steps to load an empty configuration on an xMF subsystem.

1. Select the **Acquisition > Site >xMF subsystem**.
2. From right-click menu select **Load Empty Configuration**

**Note:** A warning appears stating that loading an empty configuration un-route PDU dataflows at the associated xMF subsystem. (For more information, see [Avoiding Lost PDU Routes Due to Cancel Changes on an xMF Subsystem](#).)

3. To continue to load an empty configuration, click **OK**.

**Note:** For changes to take effect, click **Apply Changes** from the subsystem right-click menu.

## Cancelling Changes to an xMF Subsystem

You can cancel changes to a subsystem by using the Cancel Changes option.

**Note:** Choosing "Cancel Changes" on an xMF subsystem removes the existing configuration (any changes that have occurred) of that subsystem and restores the latest applied (active) configuration which includes Monitoring Groups in the case of IMF or Card/Port/Link Mapping and Traffic Classifications (TCs) in the case of PMF. Feeder Thresholds, xMF subsystem parameters and PDU dataflows are preserved (but the PDU routes are not preserved). This action also enables the "Apply Changes" banner for that xMF subsystem. PDU dataflow routing can be restored either by modifying the Build DFPs on the IXP subsystem in order to re-associate the dataflows with the DFPs, or by restoring the last applied configuration on the IXP subsystem that contains the Build DFPs (see next note for constraints on restoring IXP).

**Note:** Care must be taken in restoring the last applied IXP subsystem configuration because any un-applied configurations to that IXP subsystem will be lost.

Complete these steps to cancel changes for a subsystem. Again, if any changes have occurred, you are prompted with this message:

Configuration has occurred on the following IXP subsystems: IXPSubsystemName, changes must be applied or cancelled.

**Note:** To apply changes to a subsystem you need to be assigned the role NSP Config Manager or NSP Administrator.

1. Select the **subsystem** that needs to have the changes cancelled.
2. Right-click and select **Cancel Changes** from the pop-up menu.  
CCM displays the configuration changes that will be applied to the selected xMF subsystem. At this point, you are prompted if you want to continue, cancel, or undo.
3. Click **Undo**.  
The last configuration that was applied to the xMF subsystem is reloaded.
4. Click **Apply Changes** for the xMF subsystem.  
To avoid loss of PDU Routes on the IXP subsystems associated with the xMF subsystem follow steps 5-8.
5. Select the **IXP Subsystem** associated with the xMF subsystem.
6. From the right-click menu on the IXP subsystem, select **Config Backup / Restore**.
7. From the screen select the last **Active** backup.
8. Click **Restore** from the tool bar.  
If prompted, click **Apply Changes**.

### ***Avoiding Lost PDU Routes Due to Cancel Changes on an xMF Subsystem***

How to avoid losing PDU routes when "Cancel Changes" option has been used on IXP and xMF (see [Losing PDU Routes Due to Cancel Changes](#)).

Complete one of these two actions to avoid losing PDU routes.

Either:

Click **Cancel Changes** only for the IXP subsystem leaving the associated xMF subsystem unchanged.  
Or

After clicking **Cancel Change** on an xMF subsystem, select the IXP subsystem(s) that is receiving the data from the xMF and complete the Config Backup/Restore procedure (see [Restoring Lost PDU Routes Due to Cancel Changes on an xMF Subsystem](#)).

#### ***Restoring Lost PDU Routes Due to Cancel Changes on an xMF Subsystem***

How to restore PDU routes lost when "Cancel Changes" option has been used on IXP and xMF (see [Losing PDU Routes Due to Cancel Changes](#)).

Complete these steps to restore lost PDU routes.

1. Select the **Mediation > Sites > IXP Subsystem > Config Backup/Restore** that is receiving traffic from the xMF subsystem.

**Note:** The backup configuration must be in a state labeled as "Active."

2. Select the **Configuration** that is to be restored from the backup list.
3. Click **Restore** from the tool bar.  
The configuration that was selected is reloaded.

4. **Apply changes** to all **IXP** and **xMF** subsystems affected.

#### **About xMF Subsystem Settings**

The settings option for a specific xMF subsystem is accessed by right-clicking on the selected xMF subsystem. (Select **Acquisition > Sites > Subsystem > Settings**) The subsystem settings list screen opens.

The settings option has five default parameters described in the table.

- CountUploadFreq - PMF uses the set value as the frequency for uploading to the IXP. It is measured in seconds, 1 (default) - 2147483647 (max java int).
- NoDataAlarmThreshold - MSU Feed no activity alarm threshold in minutes. All connections are working, but no activity on the network. Threshold is defined in minutes between 1 min and 24 hours, with default of 5 min (Range: 1-1440).
- PDUDStorage - saves monitored IP RAW data to RAM or disk
- PDUDStorageAssoc - saves monitored IP RAW data to RAM or to disk
- SigtranMonitor - has three setting values 0=Off (if Sigtran is not utilized), 1=On if there are configured associations and application server processes, 2=ON(All)
- ThresholdKbps - sets the threshold for Kbps for a subsystem

**Note:** For ThresholdKbps values, it is recommended that the value range be:

- 100,000 - 500,000 Kbps for a system that has no disk storage
- 10,000 - 50,000 Kbps for a system that has disk storage
- UseGTPFilters - Enables and disables GTP post filtering on PMF. It has two setting values, 0=Disable and 1=Enable. (Enable is the default.)

In addition you can create additional settings for your subsystem.

**Note:** You cannot delete the default setting parameters only those parameters that you have created.

CCM provides the capability for you to view and edit some xMF parameters on a per-subsystem basis. Initially, the following are the ranges for pre-defined parameters.

Parameter	Default Values	Comment
Pdu Idb Storage	0	PDU IDB Storage = 0, means data is buffered only in memory and has limited recover after network outage, but has higher speed. Recommended for PMF/IP
Threshold Kbps	100,000	ThresholdKbps = maximum allowed throughput of xmf AFTER PMIA filtering. If exceeded, the system will start to drop MSUs to protect itself.
Pdu Idb Storage	1	PDU IDB Storage = 1, means data is buffered on disk in case of

Parameter	Default Values	Comment
		network outage to be able to recover up to six hours. Recommended for IMF and PMF/E1T1

TABLE 52: RANGES FOR PRE-DEFINED SUBSYSTEM PARAMETERS

### About xMF Subsystem Parameter Settings

There are two considerations when enabling or disabling PDUDStorage and PDUDStorageAssoc.

- PDUDStorage - the default setting is enabled. When enabled, monitored data is stored to the disk.  
**Note:** If IP RAW data should be stored to the disk, then both PDUDStorage and PDUDStorageAssoc must be enabled. If disabled, the monitored data is stored only to RAM.
- PDUDStorageAssoc - the default setting is disabled. If this parameter is enabled, then IP RAW data is stored to the disk.  
**Note:** This parameter is valid only if PDUDStorage is enabled. If it is disabled (default setting), then the monitored IP RAW data is stored only to RAM.

### Creating a Subsystem Parameter

Complete these steps to create a subsystem parameter for an xMF application.

1. Select Acquisition > Sites > xMF subsystem.
2. Right click and select Settings.

The *Settings List* screen opens.

	#	Parameter Name	Value	Description
<input type="checkbox"/>	1	CountUploadFreq	1	Traffic Classification Counter Upload Frequency
<input type="checkbox"/>	2	PDUDStorage	1	xMF Parameter holding default value for PDUDStorage
<input type="checkbox"/>	3	PDUDStorageAssoc	0	PDU Storage for Associations
<input type="checkbox"/>	4	SigtranMonitor	2	SigtranMonitor flag, it can have three possible values [0 = OFF, 1 = ON (only for configured Associations), 2 = ON (for all Associations)]
<input type="checkbox"/>	5	ThresholdKbps	40000	xMF Parameter holding default value for ThresholdKbps

Figure 92: xMF Subsystem Settings List Screen

3. Click Add on the tool bar.

The *Add* screen opens.

<b>Name</b>	<input type="text"/>
<b>Value</b>	<input type="text"/>
<b>Description</b>	<input type="text"/>

Figure 93: xMF Subsystem Parameter Add Screen

4. Enter the **Name** of the parameter.
5. Enter the **Value** (integer).
6. (Optional) Enter the **Description**.
7. Click **Add**.

The parameter is added.

**Note:** The subsystem must be synchronized for the changes to be incorporated into the system.

### Modifying a Subsystem Parameter

Complete these steps to modify an xMF subsystem parameter.

1. Select **Acquisition > Sites > xMF** subsystem that needs modification.
2. Right click and select **Settings**.  
The *Settings List* screen opens.
3. Select the **parameter** to be modified.

**Note:** You can only modify the values of the three default parameters.

4. Click **Modify** on the tool bar.  
The *Modify* screen opens.
5. (Optional) Modify the **Value**.

**Note:** You can also reset the value of the parameter to default settings only if you are modifying one of the three default parameters.

6. (Optional) Modify the **Description**.
7. Click **Modify** to save the settings.  
The parameter is modified.

#### **Deleting a Subsystem Parameter**

Complete these steps to delete an xMF subsystem parameter.

1. Select **Acquisition > Sites > xMF** subsystem.
2. Right click and select **Settings**.  
The *Settings List* screen opens.
3. Select the **parameter** to be deleted.


**Note:** You can only modify the values of the three default parameters.

4. Click **Delete** on the tool bar.
5. Click **OK** at the prompt.  
The parameter is deleted.

### **Viewing xMF subsystem Status**

Complete these steps to view the status of subsystem applications.

1. Select the **xMF subsystem** that will have the setting.
2. Select **Status** from the pop-up menu.
3. The *Status List* screen opens.

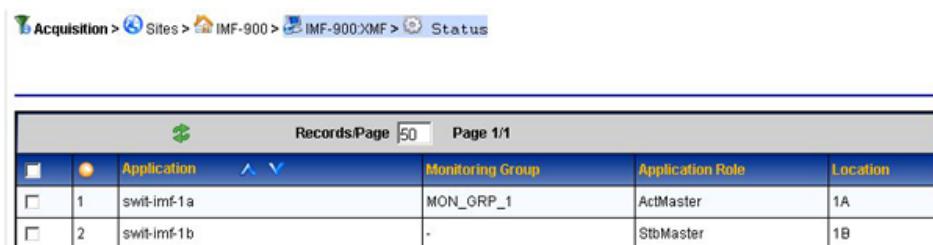

Records/Page <input type="text" value="50"/> Page 1/1						
		Application	Monitoring Group	Application Role	Location	
<input type="checkbox"/>	1	swit-imf-1a	MON_GRP_1	ActMaster	1A	
<input type="checkbox"/>	2	swit-imf-1b	-	StbMaster	1B	

Figure 94: xMF Stream Threshold List Screen

You can view the:

- Application
- Monitoring group associated with the subsystem
- Application role
- Location

### **About Feeder Thresholds**

Feeder thresholds provide limits that trigger alarms for different kinds of traffic (MSU, Gb, IP, MF) passing through the xMF system. xMF thresholds can be set thresholds in the Acquisition perspective of CCM.

**Note:** If you have any questions as about feeder alarms, please contact your Tekelec representative.

### ***Feeder Threshold Values***

<b>Threshold Name</b>	<b>Description</b>	<b>Value</b>
hiThreshold	High Threshold for PDU Stream	95%
holdOn	Hold for PDU Stream	5%
loThreshold	Low Threshold for PDU Stream	80%
maxThroughput	Max Throughput (Kbps) for PDU Stream	3000
msuInMaxThroughput	MSU Max Throughput (Kbps) for Incoming Traffic	50000
msuInHiThreshold	MSU High Threshold for Incoming Traffic	95%
msuInLowThreshold	MSU Low Threshold for Incoming Traffic	80%
msuOutMaxThroughput	MSU Max Throughput (Kbps) for Outgoing Traffic	50000
msuOutHiThreshold	MSU High Threshold for Outgoing Traffic	95%
msuOutLowThreshold	MSU Low Threshold for Outgoing Traffic	80%
msuOutHoldOn	MSU Hold for Outgoing Traffic	5%
gbInMaxThroughput	Gb Max Throughput (Kbps) for Incoming Traffic	80000
gbInHiThreshold	Gb High Threshold for Incoming Traffic	95%
gbInLowThreshold	Gb Low Threshold for Incoming Traffic	80%
gbInHoldOn	Gb Hold for Incoming Traffic	5%
gbOutMaxThroughput	Gb Max Throughput (Kbps) for Outgoing Traffic	150000
gbOutHiThreshold	Gb High Threshold for Outgoing Traffic	95%
gbOutLowThreshold	Gb Low Threshold for Outgoing Traffic	80%
gbOutHoldOn	Gb Hold for Outgoing Traffic	5%
ipInMaxThroughput	IP Max Throughput (Kbps) for Incoming Traffic	400000
ipInHiThreshold	IP High Threshold for Incoming Traffic	95%
ipInLowThreshold	IP Low Threshold for Incoming Traffic	80%
ipInHoldOn	IP Hold for Incoming Traffic	5%
ipOutMaxThroughput	IP Max Throughput (Kbps) for Outgoing Traffic	150000
ipOutHiThreshold	IP High Threshold for Outgoing Traffic	95%
ipOutLowThreshold	IP Low Threshold for Outgoing Traffic	80%
ipOutHoldOn	IP Hold for Outgoing Traffic	5%
mfInMaxThroughput	Message Feeder Max Throughput (Kbps) for Incoming Traffic	150000
mfInHiThreshold	Message Feeder High Threshold for Incoming Traffic	95%
mfInLowThreshold	Message Feeder Low Threshold for Incoming Traffic	80%
mfInHoldOn	Message Feeder Hold for Incoming Traffic	5%
mfOutMaxThroughput	Message Feeder Max Throughput (Kbps) for Outgoing Traffic	150000
mfOutHiThreshold	Message Feeder High Threshold for Outgoing Traffic	95%
mfOutLowThreshold	Message Feeder Low Threshold for Outgoing Traffic	80%
mfOutHoldOn	Message Feeder Hold for Outgoing	5%

	Traffic	
--	---------	--

TABLE 53: THRESHOLD VALUES

### Setting Stream Thresholds

Stream thresholds enable you to set the limit for traffic passing through different Destinations within an xMF subsystem. In CCM you set these limits using the stream threshold option.

Stream threshold alarms are raised for every Stream whenever the traffic for that Stream crosses the specified threshold. The percentages that you set are for the high and low thresholds for the maxThroughput value (the limit of traffic passing through xMF server), that you define for every Stream.

**Note:** Because thresholds can vary according to the size of your system, it is recommended that you contact your Tekelec representative to set the percentages most compatible for your system.

Complete these steps to set a subsystem stream threshold.

1. Select the **xMF subsystem** or server that will have the setting.
2. Select **Stream Thresholds** from the pop-up menu.

The *Stream Thresholds List* screen opens.

#	Threshold	Value	Description
1	msuInMaxThroughput	500	MSU Max Throughput (Kbps) for Incoming traffic
2	msuInLoThreshold	80%	MSU Low Threshold for Incoming traffic
3	msuInHiThreshold	95%	MSU High Threshold for incoming traffic
4	msuInHoldOn	5%	MSU Hold On for Incoming traffic
5	msuOutMaxThroughput	500	MSU Max Throughput (Kbps) for Outgoing traffic
6	msuOutLoThreshold	80%	MSU Low Threshold for Outgoing traffic
7	msuOutHiThreshold	95%	MSU High Threshold for Outgoing traffic
8	msuOutHoldOn	5%	MSU Hold On for Outgoing traffic
9	gbInMaxThroughput	500	Gb Max Throughput (Kbps) for Incoming traffic
10	gbInLoThreshold	80%	Gb Low Threshold for Incoming traffic
11	gbInHiThreshold	95%	Gb High Threshold for Incoming traffic
12	gbInHoldOn	5%	Gb Hold On for Incoming traffic

Figure 95: Stream Threshold List Screen

3. Select the **Stream** to be set.
4. Click **Modify** from the tool bar.

The *Stream Threshold Modify* screen opens.

#	Threshold	Value	Description
1	msuInMaxThroughput	500	MSU Max Throughput (Kbps) for Incoming traffic
2	msuInLoThreshold	80%	MSU Low Threshold for Incoming traffic
3	msuInHiThreshold	95%	MSU High Threshold for incoming traffic
4	msuInHoldOn	5%	MSU Hold On for Incoming traffic

Figure 96: Stream Threshold Parameters Screen

5. Set the **Value** for the selected threshold.
6. Click **Apply**.

The *stream threshold* is modified.

### About xMF Applications

Once an xMF subsystem and its applications have been discovered, you can manage the following application functions:

- Modify an application
- Delete an application
- Manage applications

## Adding an E1/T1 (SPAN) Card (PMF)

If E1/T1 cards are being used for a PMF system, these cards have to be manually added and configured.

These procedures are performed from the Acquisition perspective. Complete these steps to add an E1/T1 SPAN card to a PMF subsystem.

1. Select **Acquisition > Site (with PMF subsystem) > subsystem > Server > Cards**.
2. Select **Add** from the pop-up menu.

The *Add Card* screen appears.

<b>Slot Number</b>
1
<b>Hardware Type</b>
SPAN
<b>Software Mode</b>
SS7-T1
<b>Admin. State</b>
Disable

Figure 97: Add Card Screen

3. Select the **Slot Number**.
4. Select the **Hardware Type** to SPAN.
5. Select the **Software Mode**.
  - SS7-T1
  - SS7-E1
  - GB-E1
  - GB-T1
6. Modify the various **parameters** in the port.
7. Select the **Admin. State** (enable/disable).
8. Click **Create** for the Linkset.

The card is created.

**Note:** For the changes to take effect, right-click PMF subsystem that has the card and select **Apply Changes** from the menu.

## Configuring E1/T1 Cards (PMF)

After you have created a PMF subsystem and discovered its applications, you can configure the PMF applications. Complete these steps to configure a PMF application (E1/T1 Span Card).

1. Select **Acquisition > Site (with PMF subsystem) > PMF Subsystem > Server > Cards**.
2. Select the appropriate **Card**.

**Note:** E1/T1 Cards will be labeled in numerical order with name of SPAN, for example 1: SPAN.

3. Right-click on the **Card**.
4. Click **Modify**.

The *Card* screen opens showing the cards ports.

Slot Number : 1	Hardware Type : Span	Span Type : SS7-T1	Admin. State : Disable		
Port	Configured	Zero Suppression	Framing	Access Mode	Bit Inversion
1	0	-	-	-	-
2	1	-	-	-	-
3	2	-	-	-	-
4	3	-	-	-	-
5	4	-	-	-	-
6	5	-	-	-	-
7	6	-	-	-	-
8	7	-	-	-	-

Figure 98: Span Card Screen with Unconfigured Ports

5. Select the port you want to configure by clicking the check box in the Configured column. The screen changes to show configurable parameters such as Zero Suppression, Framing, Access Mode and Bit Inversion along with the Channel Link Mapping screen for that port.

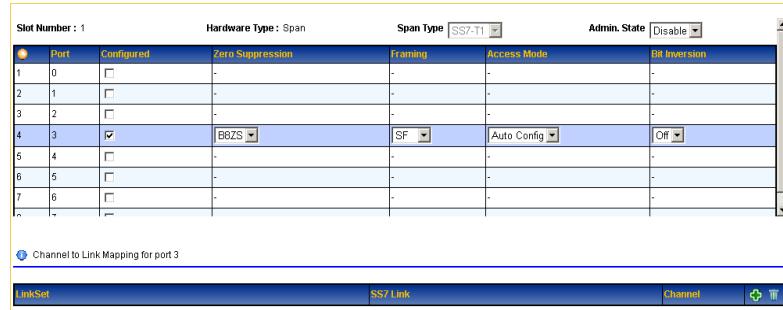


Figure 99: Span Card Configure Screen with Channel Link Mapping Section

6. Modify the various **parameters** in the port.
7. Click the **Add** icon on the tool bar in the Channel to Link Mapping section.

**Note:** Only unmonitored links (SS7 and Gb) are shown.

**Note:** Other PMF configurations such as site configuration, discovery, network elements (linkset and link), traffic classifications and PDU data flows remain unchanged and remain consistent across the PMF subsystem.



Figure 100: Span Card Configure Screen with Channel Link Mapping Add Screen

8. Click **Browse** for the Linkset.

**Note:** You can also use the "auto complete" text box to search the linksets or Gb links quickly if you know the name.

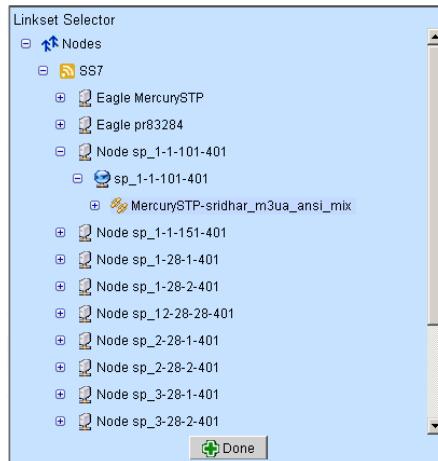


Figure 101: Span Card Configure Screen with Channel Link Mapping Add Screen

When you have selected the linkset, click **Done**.

9. Select the **Link** associated with the linkset.
10. Select the **Port** associated with the linkset.
11. Click **Modify**.

The card port is configured.

Make sure to apply the changes to the subsystem when you have finished using the subsystem right-click menu.

## Modifying xMF Applications

**Note:** You can only modify the description of an application once the application has been discovered.

## Deleting xMF Applications

Complete the following steps to delete an xMF application.

**Note:** You cannot delete an IMF application where number of IMF monitoring groups is less than or equal to the number of operational IMF servers.

**Note:** You cannot delete an PMF application that has a configuration. You must delete the dependent elements first before deleting the application.

1. Select **Acquisition > Site > xMF subsystem > Host > Application**.

2. Select the **application** from the IMF or PMF to be deleted.

3. Click **Delete**.

4. Click **OK** at the prompt.

The application is deleted. You must then synchronize the subsystem for the changes to take effect in the system.

## About Monitoring Groups (IMF)

A Monitoring Group is used to configure a IMF to monitor specific Linksets and/or Associations.

Once a Linkset/Association is part of a Monitoring Group, the IMF instructs the Eagle to send MSUs/PDUs to the IMF for capturing. When Linksets and/or Associations are monitored by the IMF, the IMF captures the MSUs/PDUs received from Eagle and forwards these to the IXP for processing/storage based on PDU Data Flows Configurations on IMF and Dataflow Processing Configurations on IXP.

Monitoring Groups support Associations for *SigTran Fast Copy* capability. This capability provides efficient configuration and maintenance of the IMF subsystem by integrating it with the Eagle without impacting the internal Eagle IMT bus. In addition, the SigTran data is monitored in real time, similar to the port mirroring with PMF, again with no internal impact to the IMT bus. For more information on supporting and configuring Fast Copy, refer the documentation for Eagle.

**Note:** Since monitoring groups must be associated with a linkset, you must have existing linksets before you can assign a monitoring group.

**Note:** Linksets that have not been associated with any monitoring group will not be monitored. It is recommended that when creating an association, you also monitor the other links in the linkset(s).

The monitoring group list page has five columns:

- Groups listed for a site - shows the record number of the monitoring group
- Group Name - shows the name of the monitoring group
- Description - shows a short description of the group (optional).
- Number Links - shows the number of monitored linksets
- Number Associations - shows the number of monitored associations

### ***Automatic Failover Capability***

IMF has an automatic failover capability to reduce PDU loss in case of server hardware failure.

Whenever an IMF server fails, the IMF subsystem automatically shifts all the linksets/links monitored by the failed server to an available spare server within the subsystem. In order to support this feature, there needs to be one IMF server (spare) that does not have a monitoring group assigned to it.

The maximum number of monitoring groups you can configure is *equal to the number of servers available in the subsystem*. You can assign linksets to each monitoring group. A linkset can be assigned to only one monitoring group. You can also configure *n-1 monitoring groups* (n is the number of servers), to guarantee one server being available for failover.

### ***Enabling or Disabling Subsystem Failover***

Described here are the steps to disable or enable the automatic IMF subsystem failover for a specific IMF subsystem.

**Note:** The subsystem default is **Enabled**.

To disable an IMF subsystem failover complete the following:

1. Select **Acquisition > Sites >xMF (IMF)** subsystem.
2. Right-click on the **Subsystem**.
3. Select **Disable**.
4. Click **Done**.
5. **Apply Changes** for that subsystem.

**Note:** To enable the disabled subsystem failover operation, select **Enable** in step 3.

### ***Considerations When Working with STC/Fastcopy***

The following is a list of points one should consider when working with the STC/Fastcopy feature:

- Existing STC links that are monitored remain in the same Monitoring Group.
- Monitored links which were part of an association and are changed back to STC copy will remain in the same Monitoring Group if the linkset belongs to the same Monitoring Group.
- Monitored links that are part of an association and are changed back to STC copy will switch to the same Monitoring Group as part of the linkset if the linkset belongs to a different Monitoring Group.
- Any un-monitored links which are part of an Association and are changed back to STC copy will be added to the same Monitoring Group as the linkset.
- The monitoring group panel in CCM does not show association as a possible selection to monitor if the association no longer contains Fast Copy links. However, the linkset(s) will be available as a possible selection.
- Un-monitored links that switch from STC to an association will be added to the same Monitoring Group as the Association if the association is monitored.
- The Monitoring Group panel in CCM does not show a linkset as a possible selection if all the links in the linkset belong to association(s). However, the Association(s) will be available as a possible selection.
- If a Monitoring Group no longer contains any links, then the Monitoring Group is automatically deleted.
- If a Dataflow no longer contains any links, then the Dataflow is automatically deleted.
- If the movement of linksets or Associations from one Monitoring Group to another results in removal of all routes in one or more Dataflows, then those Dataflows are deleted automatically. You will then need to create new or modify existing Dataflows in order to re-route the linksets or Associations.
- Dataflows may need to be modified or added in order to accommodate automatic Monitoring Group changes. The routes within the existing Dataflows may be removed automatically, but may need to be added manually by selecting the necessary linksets or associations.
- The Dataflow Processings and Streams will not be modified or removed automatically due to any automatic changes to Dataflows during the STC-FC switching, although you may need to manually modify or remove the Dataflow Processings later.
- Because associations are included in the calculation of Monitoring Group capacity, it is possible for some of the links that changed from STC to FC to be monitored after the discovery process. For example, the Monitoring Group capacity for a linkset containing 3 M2PA associations and 12 STC links would equate to 18. Therefore, it is highly recommended that after synchronizing the IMF that the Monitoring Groups, Dataflows and number of streams should be verified of changes prior to applying changes to the IMF subsystem. The verification also applies to the load balance on IMF based on Monitoring Groups, Dataflows, and Streams.

- Make sure that you apply changes in CCM when converting STC to Fast Copy or Fast Copy to STC because of the possibility of traffic loss during the synchronization period up until you have applied all changes to the subsystem (modifying or removing Dataflows and Monitoring Groups).

### **Adding a Monitoring Group (IMF)**

Complete these steps to add a Monitoring Group to an IMF subsystem.

1. Select **Acquisition > Sites > Host > xMF (IMF) subsystem > Server > Monitoring Group**.  
The *Monitoring Groups List* screen opens.
2. Click **Add** from the toolbar.  
The *Monitoring Group Add* screen opens.

**Note:** There must be monitored links and associations present for the Monitoring Group to be created. If no linksets or Associations are present, they must be added and then the changes applied to the IMF Subsystem.

Field	Description
Group Name	Provides the name of the monitoring group that is being added.
(Optional) Description	Provides some useful information about the monitoring group.
Linksets and Associations Notation	Shows the number of linksets and associations that belong to the IMF subsystem.
Linksets Tab	Shows un-monitored and monitored linksets on the IMF server.
Associations Tab	Shows un-monitored and monitored associations on the IMF server.
Cards Tab	Shows un-monitored and monitored cards on the IMF server.
Reset Button	Resets the screen back to its default status.
Cancel Button	Cancels any changes in progress.
Add Button	Adds the monitoring group to the IMF server.

TABLE 54: ADDING MONITORING GROUP

3. Enter the **Group Name**.
4. (Optional) Enter a **Description**.
5. Select the **Un-monitored Linksets** that will belong to the Monitoring Group.

**Note:** Each linkset is listed by name and how many STC links and associations it has. The notation is:

`linksetname (STC=<n>, ASSOC=<n>)`

For example,

`s1cssg-1sto12551 (STC=2, ASSOC=0)`

6. Click the **right arrow** to move the linkset(s) to the monitored linksets field.
7. Click the **Associations** Tab and select the un-monitored association(s).
8. Click the **right arrow** to move the selected association(s) to the monitored field.
9. Click the **Card Tab** and select the un-monitored card(s).
10. Click the **right arrow** to move the selected card(s) to the monitored field.
11. Click **Add**.

The *Monitoring Group* is added to the list.

**Note:** For the changes to take effect, right-click on the IMF subsystem and select **Apply Changes** from the menu.

**Note:** You can assign both linksets and associations to a Monitoring Group when you are monitoring more than just SS7 linksets such as SigTran Links.

### ***Moving Linksets and Association Monitoring***

This feature provides a shortcut for moving linksets, associations and cards from one Monitoring Group to another.

Complete these steps to move elements of one monitoring group to another Monitoring Group.

1. Select **Acquisition > Sites > xMF (IMF) subsystem**.
2. From the Actions column select **Move Linkset and Association Monitoring** (the icon on the right side of the column).
3. Click the **Tab (Linkset, Association, Card)** for the element that is to be moved.

**Note:** Default tab is Linkset.

This table describes the Move Linkset and Association Monitoring screen columns.

Column	Description
Selection	Provides a check box to select the linkset, association or card.
#	Shows the record number of element within the table.
Component (Linkset, Association, Cards)	Shows the name of the element.
Monitoring Group	Shows the monitoring groups in the system along with a radio button showing what monitoring group the element belongs to. <b>Note:</b> The network signaling element(s) will have the monitoring group radio button selected based on the current configuration.

TABLE 55: MOVE LINKSET AND ASSOCIATION MONITORING SCREEN

4. Select the **Element(s)** to be moved.
5. To choose the new Monitoring Group for the selected element(s), click on the **Radio Button** under the desired Monitoring Group heading.

**Note:** The list of available Monitoring Groups is based on what has been previously configured. It is therefore possible for the list of monitoring groups to be empty or only have a single Monitoring Group.

6. Click **Done**.
7. Repeat steps 3-6 for each element (Linkset, Association or Card) to be moved.  
For the changes to take effect, right-click on the subsystem and select **Apply Changes**.

### ***Modifying a Monitoring Group (IMF)***

Complete these steps to modify a Monitoring Group.

1. Select **Acquisition > Sites > xMF (IMF) subsystem > Server > Monitoring Group**.
2. Select the **Monitoring Group** from the list.
3. Click **Modify**.  
The *Monitoring Group* screen opens.
4. Make the necessary **Modifications**.
5. Click **Modify**.  
For the changes to take effect, right-click on the Subsystem and select **Apply Changes**.

### ***Deleting a Monitoring Group (IMF)***

Complete these steps to delete a monitoring group.

**Note:** To delete a Monitoring Group, the links assigned to that group have to be unassigned before the Monitoring Group can be deleted.

1. Select **Acquisition > Sites > xMF (IMF) subsystem > Server > Monitoring Group**.
2. Select the **Monitoring Group** that is to be deleted.
3. Click **Delete**.

4. Click **OK** at the prompt.

The Monitoring Group is deleted. You need to **Synchronize** the Subsystem for the changes to take effect.

#### ***About Associations (IMF)***

Associations refer to SCTP associations within a SIGTRAN (SS7 over IP) network. An association provides the transport mechanism for the delivery of SCCP-User protocol data units and SUA layer peer messages. Associations are similar to a TCP connection, because they support multiple IP addresses at either or both ends (multi-homing). In addition, associations support multiple logical streams (multi-streaming) as well as provide sequenced delivery for user datagram within a single input stream.

#### ***Adding an Association (IMF)***

Complete these steps to add an association to a Monitoring Group.

1. Select **Acquisition > Sites >xMF (IMF) subsystem > Server > Monitoring Group** to open the Monitoring Group screen.
2. Click **Add** from the tool bar.

Alternative procedure: Select **Acquisition > Sites > xMF (IMF) subsystem**. **Right-click** on Monitoring Group and select **Add**.

3. Enter the **Group Name**.
4. (Optional) Type a **Description**.
5. Click the **Associations** tab.

The **Associations** screen opens showing all un-monitored associations.

6. Select one or more **un-Monitored Associations**
7. Click the **right arrow** to place the Un-monitored associations to the Monitored Associations field.

**Note:** The bottom field (Un-monitored Linksets and Associations) shows those elements that are un-monitored but are part of the monitored linkset/Association. This list appears when a linkset is monitored but the Association is not (and vice versa). It is recommended that these related elements be monitored together so as to keep all linksets and Associations in the same group.

8. Select the **Cards** tab.
9. Select one or more **Cards** from the Un-monitored Cards section.
10. Click the **right arrow** to place the Un-monitored Cards to the Monitored Cards field.
11. Click **Add**.

The monitoring group with associations is added to the list.

**Note:** For the changes to take effect, right-click on the PMF subsystem and select **Apply Changes** from the menu.

#### ***About Traffic Classifications (PMF)***

A Traffic Classification on PMF is similar to a Monitoring Group on an IMF because the settings made for a Traffic Classification are used by the PMF to process the captured MSUs/PDUs received from the network. These captured MSUs/PDUs are forwarded to the IXP for processing/storage. The forwarding is based on PDU Data Flow Configurations, filters on the PMF and Dataflow Processing Configurations on IXP.

A Traffic Classification on PMF is similar to a Monitoring Group on an IMF in that a Traffic Classification is used by the PMF to process the captured MSUs/PDUs received from the IP probe. A Traffic Classification is a filter-like construct that is applied on an IP probe (NIC). Each input stream (IP stream) selects a part of the traffic from one or more IP probes. The basic idea is that each IP stream splits the traffic into manageable partitions that are used by downstream applications hence the term "traffic classifications". These captured MSUs/PDUs are forwarded to the IXP for processing/storage. The forwarding is based on PDU Data Flow Configurations, filters on the PMF and Dataflow Processing Configurations on IXP.

PIC filters IP traffic on the protocols.

- TCP
- UDP
- ICMP
- SCTP
- RTP

### ***About Chunk and Packet Forwarding***

Stream Control Transmission Protocol (SCTP) packets contain a common header and variable length blocks (chunks) of data. The SCTP packet structure is designed to offer the benefits of connection-oriented data flow (sequential) with the variable packet size and the use of Internet protocol (IP) addressing.

A packet represents a whole IP packet. When at least one chunk in a packet matches the filter, then the whole IP packet is sent. When forwarding packets it is best to use IP raw filters.

A chunk represents a common format where contents can vary. In chunk forwarding, only the chunk that matches the filter is forwarded along with the IP and SCTP header.

**Note:** When collecting statistical information only packets provide accurate size information. If chunk forwarding is selected, only the chunk size is used so statistical information will not be accurate. Therefore, avoid the activation of the SCTP stats and all the other SigTran stats (M2PA, M2UA, M3UA & SUA) on the SigTran builders (IPTransport & SS7Transport) when using chunk forwarding.

### ***Listing a Traffic Classification (PMF)***

You can view the list of traffic classifications (Input streams) for a PMF subsystem by selecting **Acquisition > Sites > PMF subsystem > Servers > Application > Traffic Classifications**.

The Traffic Classification screen has a tool bar and table.

The tool bar enables you to manage (add, modify, delete, refresh and set privileges) as well as activate or deactivate one or more input streams.

The table provides this specific information:

Field	Description
Traffic Classification Name	An alphanumeric field 30 characters max. Name can contain underscores, spaces and hyphens. An example of a traffic classification name is: 1_Traffic Class-Gb.
Description	Text field 225 characters max.
Internet Protocol	Lists the protocols filtered by traffic classification (All or ICMP).
Transport Protocol	Lists the transport protocols filtered by traffic classification (All, SCTP, TCP, UDP)
Application Layer	Lists the application layer (GTP-C or GTP-U) used by the traffic classification.
Forwarding	Lists the forwarding constraints (packets alone or packets and counters) for filtering the stream
Policy	Lists what IDM (intelligent data monitoring) policy, if any, is used in the traffic classification.
Annotations	Text field that lists any annotations for the stream.
Status	NA
Owner	Lists what user has created the traffic classification.
Duplicate Suppression	Tells whether duplicate IP suppression is

	activated/deactivated
--	-----------------------

TABLE 56: TRAFFIC CLASSIFICATION FIELDS

### ***Adding a Traffic Classification (PMF)***

Complete these steps to add a traffic classification (IP stream).

1. Select **Acquisition > Sites > PMF subsystem > Servers > Application > Traffic Classifications**.

The *List* screen opens.

2. Click **Add** on the tool bar to open the wizard.

3. Enter the **Name** of the traffic classification.

4. (Optional) Enter a **Description**.

5. Select an **Internet Protocol** from the pull-down list.

**Note:** If ICMP is selected, no transport or application layers are utilized. Proceed to step 8.)

6. Select a **Transport Protocol** from the pull-down menu.

**Note:** If SCTP is selected, then all application layers are also selected by default (see step 7).

7. Select an **Application Layer** from the pull-down list.

8. Select a **Filter**.

**Note:** The list of filters presented is dependent upon the Transport Protocol selected.

9. Select the **Forwarding** method.

**Note:** If SCTP is selected as transport protocol, then the chunks or packets can be sent.

- If chunk is selected as the forwarding mechanism, then only matched chunks are sent (as well as the IP and SCTP header).
- If packet (IP Raw) is selected as the forwarding mechanism, then the whole IP packet is sent when at least one chunk in the packet matches the filter.

10. Select an **Association** to be associated with the TC.

- a. If SCTP is selected, click **Association Selector** from the Association Selector tool bar.
- b. Select one or more **Associations** from the Association Selector pop-up screen.
- c. Click **Select** to add the associations to the traffic classification.

11. Click **Next** to open the probe assignment screen.

12. Select one or more **probes** from the available options field.

13. Click the **right arrow (>)** to move them to the selected options field.

14. Click **Next** to open the Annotation screen.

15. Enter an **Annotation**.

16. (Optional) Click **Add** To List.

The *annotation* is added to the Selected Annotations list.

**Note:** You can also select existing annotations by typing the first letter and select from the list that appears.

**Note:** To remove an annotation, select the annotation and click **Remove From List**.

17. Click **Create**.

The traffic classification is added to the list.

**Note:** For the changes to take effect, right-click on the PMF subsystem and select **Apply Changes** from the menu.

**Note:** To configure Duplicate IP Packets Suppression on a traffic classification Please refer Duplicate IP Packet Suppression Configuration

### ***Modifying Traffic Classifications***

1. Select **Acquisition > Sites > PMF subsystem > Server > Application > Traffic Classifications**.  
The *List* screen opens.

2. Select the specific **Traffic Classification (IP Stream)**.
3. Click **Modify** from the tool bar.
4. Modify the appropriate **information** in the record.
5. Click **Modify** at the bottom of the screen.

**Note:** To activate/deactivate Duplicate IP Packets Suppression on a traffic classification Please refer Duplicate IP Packet Suppression Configuration

**Note:** You must **Apply Changes** to the PMF subsystem for the changes to take effect.

#### ***Deleting Traffic Classifications***

Complete these steps to delete an IP Stream record from a PMF Traffic Classification.

1. Select **Acquisition > Sites > PMF subsystem > Host > Application > Traffic Classifications**.  
The *List* screen opens.
2. Select the **Traffic Classification(s)** to be deleted.
3. Click **Delete** on the tool bar.
4. Click **OK** at the prompt.  
The *Traffic Classification(s)* is deleted from the list.

**Note:** You must **Apply Changes** to the PMF subsystem for the changes to take effect.

#### ***Start capture feature for a Traffic Classifications***

1. Select **Acquisition > Sites > PMF subsystem > Host > Application > Traffic Classifications**.  
The *List* screen opens.
2. Select the **Ethereal Capture configuration** from the tool bar.
3. The *List* of active traffic classifications opens and gives current status of capture feature for each traffic classification.
4. Select the traffic classification(s) and click on **Start Ethereal Capture** button on the tool bar.
5. Click **OK** at the prompt.  
The **Capture Status** is: Capture is running on PMF [PMF server name] and pcap files will be available at */tekelec/capture/completed*
6. When capture is completed, upload the file in */tekelec/capture/completed* from PMF server by using SSH access

**Note:** the changes takes effect without making an **Apply Changes**.

#### ***Stop capture feature for a Traffic Classifications***

1. Select **Acquisition > Sites > PMF subsystem > Host > Application > Traffic Classifications**.  
The *List* screen opens.
2. Select the **Ethereal Capture configuration** from the tool bar.
3. The *List* of active traffic classifications opens and gives current status of capture feature for each traffic classification.
4. Select the traffic classification(s) on which capture has been enabled and click on **Stop Ethereal Capture** button on the tool bar.
5. Click **OK** at the prompt.  
The **Capture Status** is: Capture is not running on PMF [PMF server name] and pcap files will be available at */tekelec/capture/completed*
7. Upload the file in */tekelec/capture/completed* from PMF server by using SSH access

**Note:** the changes takes effect without making an **Apply Changes**.

#### ***Modify capture feature Parameters***

1. Select **Acquisition > Sites > PMF subsystem > Host > Application > Traffic Classifications**.  
The *List* screen opens.
2. Select the **Ethereal Capture configuration** from the tool bar.
3. The *List* of active traffic classifications opens and gives current status of capture feature for each traffic classification.
4. Click on **Capture Parameters** button on the tool bar.

The capture parameters screen opens:

- **Capture File Location:** indicates the path where the completed captures are stored on PMF (read only)
- **File Size In MB:** size of the capture files in Mbytes, default: 10 (read/write)
- **Auto Rollover:** enable or disable the auto rollover function. If enable, then continue the capture when **File Size In MB** has been reached by removing oldest file in a circular manner. By default, auto rollover function is disabled and the capture is stopped when **File Size In MB** has been reached.

5. Click **Update** to validate the changes.
6. Click **Close**.

**Note:** Capture parameters have been modified and will be taken into account during subsequent startup of capture process.

## About PMIA (for PMF Subsystems)

This option supports PMIA means Pattern Matching IP Algorithms (PMIA) configuration for PMF.

For monitoring IP traffic, CCM provides a traffic classification for each xMF (PMF) server. Each PMF server can be run in two modes either normal mode or expert mode.

In normal mode, you define IP Filters using CCM and optionally can apply on traffic classification.

In expert mode, you browse the file which can be interpreted by PMF server. While server running in expert mode, all predefined IP filters will be disabled for this server.

### **Using Normal and Expert Mode (PMF)**

For each PMF server, you have an option to switch from normal mode to expert mode and back from expert mode to normal mode. Complete these steps to switch between *normal* and *expert* modes.

1. Select **Acquisition > xMF subsystem > PMF server > Application**.  
The PMIA screen opens.

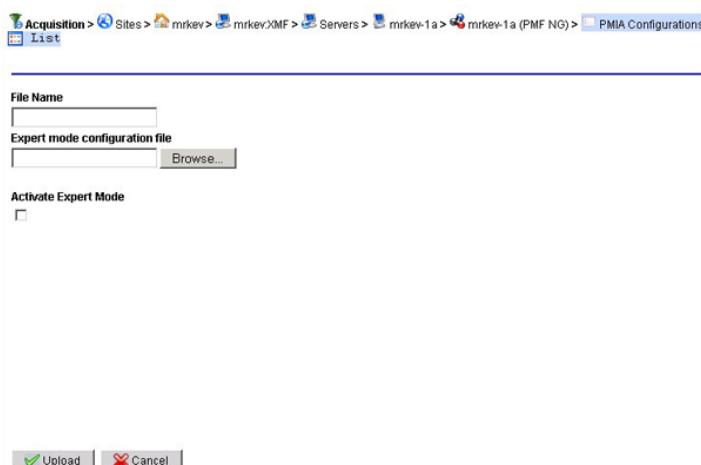


Figure 102: PMIA Screen

2. Enter the **File Name**.
3. Select the **Activate Expert Mode** field.

**Note:** Before using this option, consult with Tekelec personnel.

4. Browse the **File** that can be interpreted by xMF server.
5. Click **Upload** to upload the selected file and place the PMIA into expert status.

### **PMIA (PMF) Activating and De-activating a Configuration**

1. Select **Acquisition > xMF subsystem > PMF server > Application**.

The **PMIA List** screen opens.

2. Select the **PMIA** to be converted.
3. Select **Modify**.

The **Modify** screen opens.

4. Select the **Activate Expert Mode** field to de-activate the PMIA.
5. Click **Modify**.

The **PMIA** is modified.

**Note:** You can use the alternate method by select the PMIA from the List, and clicking De-activate from the toolbar.

#### **Deleting a PMIA (in a PMF Subsystem)**

1. Select **Acquisition > xMF (PMF) subsystem > server > Application**.  
The **PMIA List** screen opens.
2. Select the **PMIA** to be deleted.
3. Click **Delete**.
4. Click **OK** at the prompt.  
The **PMIA** is deleted.

### **About Data Transport Service (DTS)**

You can use DTS to pull data from an xMF datasource (IMF/PMF) to IXP. You create a DTS transport that defines the route (the IP address and protocol derived from the DTS datasource (an IP address and port on an IMF or PMF)).

#### **Creating a Route for a DTS Transport**

Complete these steps to create a route for a DTS transport.


1. Select **Acquisition > Sites >Server > xMF Application that needs the DTS**.
2. Right click and select **DTS Transport**.  
The **DTS List** screen opens.



Records/Page 50 Page 1/1				
	Protocol	Primary IP Address	Alternate IP Address	Actions
1	SCTP	000.000.000.000		 

Figure 103: DTS List Screen

3. Click **Add** the **DTS Add** screen opens shown below.

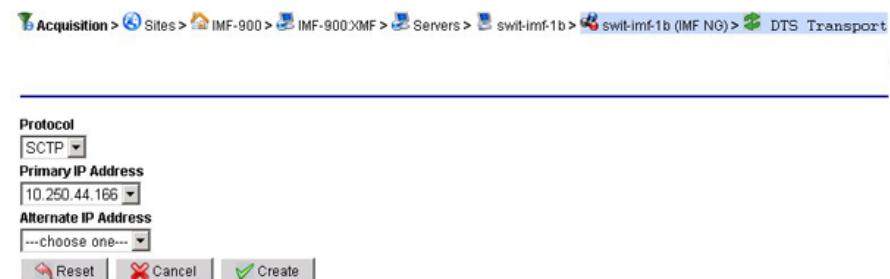

Protocol	SCTP
Primary IP Address	10.250.44.166
Alternate IP Address	...choose one...
<input type="button" value="Reset"/> <input type="button" value="Cancel"/> <input type="button" value="Create"/>	

Figure 104: DTS Add Screen

4. Select the **Protocol** (SCTP) to be used.
5. Select the **Primary IP Address**.
6. (Optional) Select the **Alternate IP Address**.
7. Click **Create**.

The new **DTS** appears in the List screen.

## About PDU Filters

The PDU dataflows that are configured in the acquisition (xMF) perspective can have filters applied to them. These Filters provide a way to route selective data from an xMF subsystem to the IXP subsystem.

The Filters are broadly categorized into four protocol types: SS7, IP, GPRS Gb and SIGTRAN protocols. These protocols provide greater efficiency in data analysis and manipulation. This is a list of protocols and their Filter types.

**Note:** There can be an unlimited number of Filters in PIC, but only one Filter can be associated with a dataflow at one time.

**Note:** The maximum size of any filter is 4000 bytes. If the Filter exceeds this constraint, an error message appears stating that the Filter has exceeded the size limit.

- GPRS Gb Protocol Filters
  - DLCI
  - SAPI
  - Combination
- IP Protocol Filters
  - IP Address
  - PORT
  - VLAN
  - SAPI
  - Raw filter
  - Combination
- SS7 Protocol Filters
  - SSN
  - PC
  - GT
  - RAW
  - Combination
- SigTran Protocol Filters
  - Association
  - SS7 Protocol
  - Data Chunk Payload Protocol Identifier
  - Raw filter
  - Combination
- SigTran SS7 Protocol Filters
  - Point Code (PC)
  - Service Information Octet (SIO)
  - Global Title Filter (GT)
  - Subsystem Number (SSN)

## xMF MSU and EMP Correspondance Values

This list provides the corresponding EMP message type with an xMF MSU type.

xMF MSU Type	EMP Message Type
2	LSSU
3	MTP2 LSL / HSL
5	SS7_Layer3
6	ISDN_Layer3
10	RAS
11	Q9331
12	H245
13	SIP

xMF MSU Type	EMP Message Type
14	RTCP
40	SigTran_M3UA
41	SigTran_M2UA_MTP3
42	SigTran_M2PA_MTP3
43	SigTran_SUA
60	MTP2a HSL
61	SS7_MTP3
69	SS7_MTP2A_LSSU
70	SS7_M2PA_MTP3_ANSI_NoSCTP_NoIP
71	SS7_M2UA_MTP3_ANSI_NoSCTP_NoIP
72	SS7_M3UA_NoSCTP_NoIP
73	SS7_SUA_NoSCTP_NoIP
74	SS7_M2PA_MTP3_ITU_NoSCTP_NoIP
75	SS7_M2UA_MTP3_ITU_NoSCTP_NoIP

TABLE 57: MSU AND EMP CORESSPONDANCE VALUES

## About SS7 Subsystem Number (SSN) Filters

SSN Filters are designed to filter PDU data related to one or more subsystem numbers.

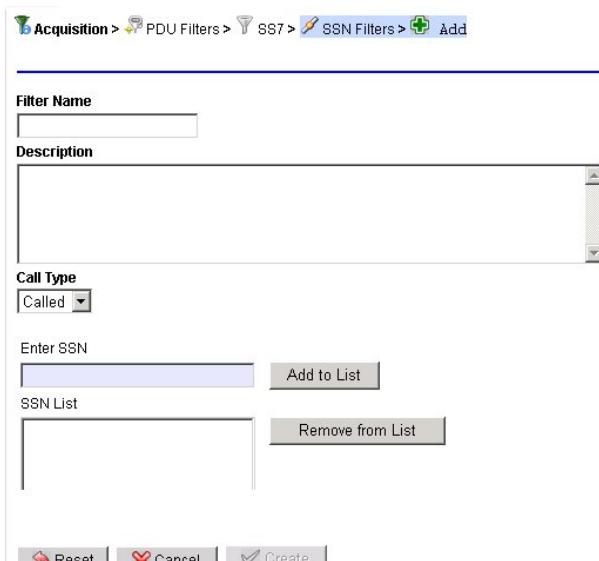


Figure 105: Add SSN Filter Screen

### About SS7 Filters

There are five types of SS7 Filters:

- SSN: Filters for data associated with one or more subsystem numbers
- Point Code: Filters for data with one or more point codes, or a point code range.
- Global Title: Filters for data associated with one or more full or partial phone numbers.
- Combination: Filters for data based on any combination of the other four SS7 Filter types.
- Raw: Free-format Filter that allows a user to configure filter criteria.

### Adding an SSN Filter

1. Select **Acquisition > PDU filters > SS7 > SSN filters**.
2. Click **Add** from the *right-click* menu.
3. (Optional) Enter a **Description**.
4. Enter in the **Filter Name**.
5. Select the **Call Type** (Called, Calling or Both)
6. Type in the **SSN** in the **Enter SSN** field.
7. Click **Add to List**.

The SSN appears in the SSN List field.  
To add multiple SSN's to a filter, repeat steps 6-7.

8. Click **Create** to accept the values.  
The *SSN Filter* is added to the object tree.

#### *Add SSN Filter Field Descriptions*

Field	Description
Filter Name	User assigned filter name. Clicking on this opens the Add / Modify SSN Filter screen.
Call Type	Indicates call direction it can be: <ul style="list-style-type: none"> <li>• called</li> <li>• calling</li> <li>• both</li> </ul>
Enter SSN	This field is for typing in a Sub System Number
Add to List	Clicking on this adds the SSN to the SSN List.
Remove from List	Clicking on this will remove the SSN from the SSN List.
Create	Clicking on this saves the information entered.

TABLE 58: ADD SSN FILTER SCREEN FIELDS

#### *Removing a SSN from an SSN Filter List*

To remove an SSN from the SSN List list, complete these steps.

1. Select the SSN from the list
2. Click **Remove from List**.  
The SSN is deleted from the list.
3. Click **Create/Modify**.

#### Modifying an SSN Filter

1. Select **Acquisition > PDU filters > SS7 filters > SSN** from the object tree.
2. Click **Modify** from the *right-click* menu.  
The *Modify* screen opens
3. Make the appropriate **Modifications**.
4. Click **Modify**.  
The changes are saved.

#### Deleting an SSN Filter

**Note:** You cannot delete an SSN Filter if there are any Dataflows associated with it. You must first delete the Dataflow(s) and then delete the filter.

1. Select **Acquisition > PDU filters > SS7 filters > SSN** from the object tree.
2. Click **Delete** from the *right-click* menu.
3. Click **OK** at the prompt.  
The *Filter* is deleted.

**Note:** All the PDU Dataflows using this filter are affected by the change.

#### ***About Global Title (GT) Filters***

Global Title Filters specify data associated with one or more full or partial phone numbers.

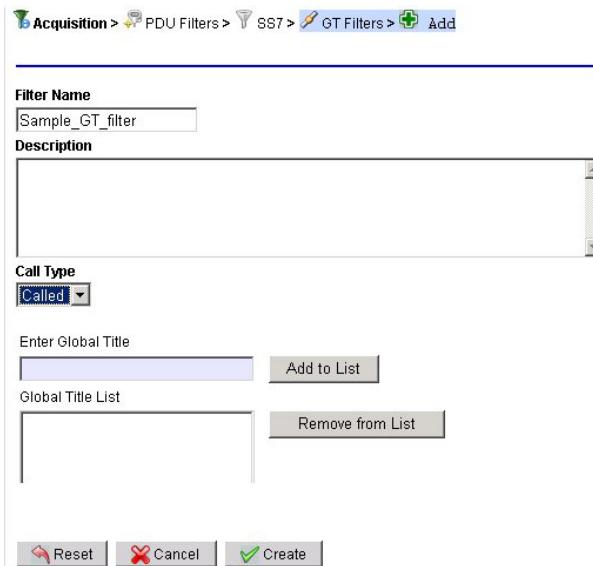


Figure 106: Global Title (GT) Filter

The table describes the fields on the Add Global Title Filter screen.

Field	Description
Filter Name	User assigned Global Title filter name.
Call Type	Indicates call direction. <ul style="list-style-type: none"> <li>Calling: Global Title is associated with the party that made the call.</li> <li>Called: Global Title is associated with the party that was called.</li> <li>Both: Associates with both call and called</li> </ul>
Enter Global Title	Type in a numeric value, or a numeric value ending with * (wildcard).
Add to List button	Adds data entered in the Enter Global Title field to the Global Title list field.
Global Title List	Shows all of the Global Title values assigned to the same Global Title filter. Values can be added to or deleted from this list.
Remove from List button	Removes highlighted Global Titles from the Global Title List field. Multiple Global Titles can be removed at the same time.
Create button	Saves information entered.

TABLE 59: ADD GLOBAL TITLE FILTER SCREEN FIELDS

#### Adding a GT Filter

Complete these steps to add a GT Filter.

1. Select **GT Filters** from the SS7 submenu.
2. Click **Add** from the submenu.  
The *Add Global Title Filter* screen opens.
3. Type in the **Filter Name**.
4. Select the **Call Type** from the drop-down menu (Called, Calling, Both).
5. Type in a **Global Title** name.  
(Or select one from an existing list by typing the first letter of the global title.)
6. Click **Add** to List.  
The title is added to the list.
7. Click **Create**.  
The title appears in the GT filter object-tree list in alphanumerical order.

**Note:** To add more than one title, repeat steps 5-7.

#### Modifying a GT Filter

Complete these steps to modify GT Filter.

1. Select the **GT Filter** that needs modification.

2. Select **Modify**.
3. Modify the **appropriate information**.
4. Click **Modify**.  
The changes are saved.

#### Deleting a GT Filter

Complete these steps to delete a GT Filter.

1. Select the **Resource ID Group** to be deleted.
2. Select **Delete** from the menu.
3. Click **OK** at the prompt.  
The *Filter* is deleted.

#### About Point Code (PC) Filters

Point Code Filters specify data associated with one or more point codes or a point-code range. A point code is a unique SS7 address that identifies a SS7 signaling point. A point code has three segments. Each segment of the point code must contain a number between 0 and 255.

The screenshot shows a software interface for creating or modifying a Point Code Filter. The top navigation bar includes 'Acquisition', 'PDU Filters', 'SS7', 'PC Filters', and an 'Add' button. The main form has the following fields:

- PC Filter Name:** A text input field.
- Description:** A large text area for notes.
- Type:** A dropdown menu showing 'OPC'.
- Select Flavor:** A dropdown menu showing 'ANSI-SS7 (8-8-8)'.
- From PC Value:** A text input field.
- To PC Value:** A text input field.
- Selected Point Code List:** A list box.
- Buttons:** 'Reset', 'Cancel', and 'Create'.

Figure 107: Point Code Filter Create/Modify Information Screen

The table describes the fields on the Point Code Filter Create/Modify Information screen.

Field	Description
PC Filter Name	User assigned name for the Point Code filter.
Description	Enter a description.
Type	Choices are: <ul style="list-style-type: none"> <li>• OPC.</li> <li>• DPC.</li> <li>• Both.</li> </ul>
Select Flavor From	Protocol / flavor of the point code for the specified point code or point code range.
Add to List	Clicking on this adds the Point Code to the Point Code List.
Remove from List	Clicking on this will remove the Point Code from the Point Code List.
Create	Saves filter information to the system.

TABLE 60: POINT CODE FILTER CREATE/MODIFY INFORMATION SCREEN FIELDS

#### Adding a PC Filter

Complete these steps to add a PC Filter.

1. Select **PC Filters** from the SS7 submenu.
2. Click **Add** from the pop-up menu.

The *Add PC Filter* screen opens.

Figure 108: Add PC Filter Screen

3. Type in the **PC Filter Name**.
4. (Optional) Type in a **description** of the filter.
5. Select the **Type** of filter (OPC, DPC, Or Both).
6. Select the **Flavor** to be used.
7. Enter the **From PC Value**.
8. Select the **To PC Value**.
9. Click **Add** to List to add it to the Selected Point Code List.
10. Click **Create**.

The *Point Code (PC) Filter* is added to the list in alphanumerical order.

#### Removing a Point Code

Complete these steps to remove a point code.

1. Select the **Point Code record** that needs modification.
2. Select the **Point Code** from the list.
3. Click **Remove** from List.  
The *Point Code* is removed.
4. Click **Done** to save the changes.

#### Modifying a Point Code Filter

Complete these steps to modify a Point Code filter.

1. Select the **Point Code** that needs modification.
2. Select **Modify**.
3. Modify the **appropriate information**.
4. Click **Modify**.  
The changes are saved.

#### Deleting a Point Code Filter

Complete these steps to delete a Point Code filter.

1. Select the **Resource ID Group** to be deleted.
2. Select **Delete** from the menu.
3. Click **OK** at the prompt.  
The group is deleted.

### ***About Raw Filters***

Raw Filters allow you to configure filtering criteria. Using this filter you can take advantage of filtering features not otherwise available from the GUI screen. Raw Filters use a free-format input in a 'where Clause' like string. This is done through a message match string with imbedded mnemonics.

In order to use the Raw Filter section of the GUI, you should know how to write 'where Clause' like strings, interpret mnemonics, and convert data into binary and hexadecimal format.



**WARNING:** If you do not know how to write 'whereClause' like strings, interpret mnemonics, and convert data into binary and hexadecimal format, do not attempt to use this GUI feature or you may experience unpredictable results.

#### Syntax

The following syntax tree describes the 'whereClause' format of the input for Raw Filters.

whereClause:

    lexpression

lexpression:

    lprimary

    lexpression or lexpression

    lexpression and lexpression

    not lexpression

lprimary:

    expression comparator expression

    expression between expression and expression

    expression not between expression and expression

    expression in ( valueList )

    expression not in ( valueList )

    expression in substitutionValueSet

    expression not in substitutionValueSet

    expression like string

    expression not like string

comparator:

    = < > <= >= <> !=

valueList:

    constant

    constant, valueList

expression:

    term

    term binaryOp expression

    unaryOp expression

    ( expression )

term:

    constant

    fieldSpecifier

constant:

    decimalConstant (e.g., -89.7)

integerConstant (e.g., -897)  
 string (e.g., 'hello world')  
 substitutionValue

substitutionValue:

%l.subTag (e.g., %l.aLong)  
 %s.subTag (e.g., %s.aString)  
 %f.subTag (e.g., %f.aFloat)

substitutionValueSet:

%L.subTag (e.g., %L.aLongSet)  
 %S.subTag (e.g., %S.aStringSet)  
 %F.subTag (e.g., %F.aFloatSet)

fieldSpecifier:

fldName (e.g., name)  
 fldName [ unsignedValue ] (e.g., name[5])

binaryOp:

& >> <<  
 |  
 \* / %  
 + -

unaryOp:

+ -

**Mnemonics:** The PMF subsystem has its own set of mnemonics that are used during Raw Filter creation. The mnemonics are used to specify what data you want to filter. The following table describes the mnemonics available for use with the Raw Filter Configuration page. Refer to this table for more information.

Field	Description	Value Entry Format
AIN_CALLED	Advanced Intelligent Network Called Number	Phone Number
AIN_CALLING	Advanced Intelligent Network Calling Number	Phone Number
AIN_CHARGE	Advanced Intelligent Network Charge Number	Phone Number
AIN_DIRECTORY	Advanced Intelligent Network Directory Number	Phone Number
AIN_MT	Advanced Intelligent Network Message	Hex
AIN_TRUNK_GROUP_ID	Advanced Intelligent Network Trunk Group Identifier	Hex
ANSI_BILLING	American National Standards Institute Billing ID	Decimal
ANSI_CALLED	American National Standards Institute Called Number	Phone Number
ANSI_CALLING	American National Standards Institute Calling Number	Phone Number
ANSI_CARRIER	American National Standards Institute Carrier Digits	Decimal
ANSI_DIGITS_TYPE	American National Standards Institute Digits Type	Decimal
ANSI_LATA	American National Standards Institute Local Access Transport Area	Decimal
ANSI_ROUTING	American National Standards Institute Routing Number	Decimal
ANSI_SERVICE_KEY	American National Standards Institute Service Key	Decimal
ANSI_SERVKEY_BILLING	American National Standards Institute Billing Number within Service Key Parameters	Decimal
ANSI_SERVKEY_CALLED	American National Standards Institute Called Number within Service Key Parameters	Decimal
ANSI_SERVKEY_CALLING	American National Standards Institute Calling Number within Service Key Parameters	Decimal
ANSI_SERVKEY_CLGDIRNUM	American National Standards Institute Calling Directory Number within Service Key Parameter	Decimal

Field	Description	Value Entry Format
ANSI_SERVKEY_DEST	American National Standards Institute Destination Number within Service Key Parameter	Decimal
BICC_CIC	Bearer Independent Call Control Call Instance Code	Reverse Hex
BSSAP_DISCR	GSM Base Station Application Part Discriminator	Decimal
BSSMAP_CAUSE	GSM Base Station Mobile Application Part Cause Value	Reverse Hex
BSSMAP_CI	GSM Base Station Mobile Application Part Cell Identifier	Hex
BSSMAP_CIC	GSM Base Station Mobile Application Part Circuit Identification Code	Reverse Decimal
BSSMAP_LAC	GSM Base Station Mobile Application Part Location Area Code	Reverse Hex
BSSMAP_MCC	GSM Base Station Mobile Application Part Mobile Country Code	Phone Number
BSSMAP_MNC	GSM Base Station Mobile Application Part Mobile Network Code	Phone Number
BSSMAP_MOBILE_ID	GSM Base Station Mobile Application Part Mobile Identifier	Phone Number
BSSMAP_MT	GSM Base Station Mobile Application Part Message Type	Hex
BSSMAP_TMSI	GSM Base Station Mobile Application Part Temporary Mobile Subscriber Identifier	Phone Number
CLASS_CALLED	ANSI Class Features Called Number	Phone Number
CLASS_CALLING	ANSI Class Feature Calling Number	Phone Number
CNAM_CALLING	ANSI Calling Name Delivery Feature	Phone Number
CNAM_CALLING_PRE	ANSI Calling Name Calling Number Presentation Indicator	Decimal
DPC	Destination Point Code	Point Code
DTAP_CALLED_PTY	GSM Direct Transfer Application Part Called Party	Phone Number
DTAP_CALLING_PTY	GSM Direct Transfer Application Part Calling Party	Phone Number
DTAP_CAUSE	GSM Direct Transfer Application Part Cause Code	Hex
DTAP_MAP_OPER	GSM Direct Transfer Application Part Map Operation Code	Hex
DTAP_MOBILE_ID_MM	GSM Direct Transfer Application Part Mobility Management Mobile ID	Phone Number
DTAP_MOBILE_ID_RR	GSM Direct Transfer Application Part Radio Resources Mobile ID	Phone Number
DTAP_MT	GSM Direct Transfer Application Part Message Type	Hex
DTAP_SS_DATA	GSM Direct Transfer Application Part Supplementary Services Data	Text String
DTAP_TMSI_MM	GSM Direct Transfer Application Part Mobility Management Temporary Mobile Subscriber ID	Phone Number
DTAP_TMSI_RR	GSM Direct Transfer Application Part Radio Resources Temporary Mobile Subscriber ID	Phone Number
DTAP_TRANS_FLAG	GSM Direct Transfer Application Part Transaction Flag	Decimal
DTAP_TRANS_ID	GSM Direct Transfer Application Part Transaction Identifier	Decimal
DTAPCC_MT	GSM Direct Transfer Application Part Call Control Message Type	Hex
DTAPCM_TYPE	GSM Direct Transfer Application Part Call Control Service Type	Hex
DTAPMM_MT	GSM Direct Transfer Application Part Mobility Management Message Type	Hex
DTAPRR_MT	GSM Direct Transfer Application Part Radio Resources Message Type	Hex
DTAPSMS_ADDR	GSM Direct Transfer Application Part Short Message Service Address	Phone Number

Field	Description	Value Entry Format
DTAPSMS_MT	GSM Direct Transfer Application Part Short Message Service Message Type	Hex
DTAPSS_MT	GSM Direct Transfer Application Part Supplementary Services Message Type	Hex
GENERIC_NAME	ANSI Calling Name Delivery Feature Generic Name	Text String
GENERIC_NAME_PRE	ANSI Calling Name Delivery Feature Generic Name Presentation Indicator	Decimal
GSMA_MOBILE_ID	Global System for Mobile Communication A-Interface Mobile ID	Decimal
GSMA_TMSI	Global System for Mobile Communication Temporary Mobile Subscriber ID	Decimal
INAP_CALLED_DIGITS	Intelligent Network Application Part Called Number Digits	Phone Number
INAP_CALLING_DIGITS	Intelligent Network Application Part Calling Number Digits	Phone Number
INAP_DIALED_DIGITS	Intelligent Network Application Part Dialed Digits	Phone Number
INAP_ORIG_CALLED_DIGITS	Intelligent Network Application Part Originating Called Digits	Phone Number
IS41_BILLID	ANSI-41 Billing ID	Hex
IS41_CALLED	ANSI-41 Called Party	Phone Number
IS41_CALLING	ANSI-41 Calling Party	Phone Number
IS41_CALLING_DIGITS1	ANSI-41 Calling Party Number Digits 1	Phone Number
IS41_CALLING_DIGITS2	ANSI-41 Calling Party Digits 2	Phone Number
IS41_CALLING_NUMBER	ANSI-41 Calling Number	Phone Number
IS41_CALLING_STR1	ANSI-41 Calling Number String 1	Text String
IS41_CALLING_STR2	ANSI-41 Calling Number String 2	Text String
IS41_CARRDIG	ANSI-41 Carrier Digits	Phone Number
IS41_CARRIER	ANSI-41 Carrier Digits	Phone Number
IS41_CARRIER_IS_TL	ANSI-41 Carrier Digits	Phone Number
IS41_CARRIER_LC_TL	ANSI-41 Carrier Digits	Phone Number
IS41_CARRIER_PARAM	ANSI-41 Carrier Digits Parameters	Decimal
IS41_CARRIER_PS_TL	ANSI-41 Carrier Digits	Phone Number
IS41_DEST_ALL	ANSI-41 Destination Digits	Phone Number
IS41_DEST_IS_TL	ANSI-41 Destination Digits	Phone Number
IS41_DEST_LC_TL	ANSI-41 Destination Digits	Phone Number
IS41_DEST_PARAM	ANSI-41 Destination Digits Parameters	Decimal
IS41_DEST_PS_TL	ANSI-41 Destination Digits	Phone Number
IS41_DESTINATION	ANSI-41 Destination Digits	Phone Number
IS41_ESN	ANSI-41 Electronic Serial Number	Reverse Hex
IS41_ESN_IS_TL	ANSI-41 Electronic Serial Number	Reverse Hex
IS41_ESN_LC_TL	ANSI-41 Electronic Serial Number	Reverse Hex
IS41_ESN_MFG_CODE	ANSI-41 Electronic Serial Number Manufacturing Code	Hex
IS41_ESN_MFG_CODE_IS_TL	ANSI-41 Electronic Serial Number Manufacturing Code	Hex
IS41_ESN_MFG_CODE_LC_TL	ANSI-41 Electronic Serial Number Manufacturing Code	Hex
IS41_ESN_MFG_CODE_PS_TL	ANSI-41 Electronic Serial Number Manufacturing Code	Hex
IS41_ESN_MFG_CODE_TL	ANSI-41 Electronic Serial Number Manufacturing Code	Decimal
IS41_ESN_PS_TL	ANSI-41 Electronic Serial Number Manufacturing Code	Reverse Hex
IS41_MDN	ANSI-41 Mobile Directory Number	Phone Number
IS41_MDN_ALL	ANSI-41 Mobile Directory Number	Phone Number
IS41_MDN_IS_TL	ANSI-41 Mobile Directory Number	Phone Number

Field	Description	Value Entry Format
IS41_MDN_LC_TL	ANSI-41 Mobile Directory Number	Phone Number
IS41_MDN_PARAM	ANSI-41 Mobile Directory Number	Decimal
IS41_MDN_PS_TL	ANSI-41 Mobile Directory Number	Phone Number
IS41_MIN	ANSI-41 Mobile Identification Number	Phone Number
IS41_MIN_ALL	ANSI-41 Mobile Identification Number	Phone Number
IS41_MIN_IS_TL	ANSI-41 Mobile Identification Number	Phone Number
IS41_MIN_LC_TL	ANSI-41 Mobile Identification Number	Phone Number
IS41_MIN_PARAM	ANSI-41 Mobile Identification Number	Decimal
IS41_MIN_PS_TL	ANSI-41 Mobile Identification Number	Phone Number
IS41_MY_TYPE	ANSI-41 System My Type Code	Hex
IS41_ROUT	ANSI-41 Routing Digits	Phone Number
IS41_ROUT_ALL	ANSI-41 Routing Digits	Phone Number
IS41_ROUT_IS_TL	ANSI-41 Routing Digits	Phone Number
IS41_ROUT_LC_TL	ANSI-41 Routing Digits	Phone Number
IS41_ROUT_PS_TL	ANSI-41 Routing Digits	Phone Number
IS41_ROUTING	ANSI-41 Routing Digits	Phone Number
IS41_ROUTING_PARAM	ANSI-41 Routing Digits	Decimal
IS41_SENDERID	ANSI-41 Sender Identification Number	Phone Number
IS41_SMS_ODA	ANSI-41 Short Message Service Original Destination Address	Phone Number
IS41_SMS_OOA	ANSI-41 Short Message Service Original Originating Address	Phone Number
ISUP_CALL_CAT	ISDN User Part Calling Party's Category	Hex
ISUP_CALLED	ISDN User Part Called Number	Phone Number
ISUP_CALLING	ISDN User Part Calling Number	Phone Number
ISUP_CARR_ID	ISDN User Part Carrier Identification	Phone Number
ISUP_CHARGE	ISDN User Part Charge Number	Phone Number
ISUP_CHG_NAT	ISDN User Part Charge Number Nature of Address Identifier	Hex
ISUP_CIC	ISDN User Part Circuit Identifier Code	Decimal
ISUP_CLD_NAT	ISDN User Part Called Party Nature of Address Identifier	Hex
ISUP_CLG_NAT	ISDN User Part Calling Nature of Connection Continuity	Hex
ISUP_CONTINUITY	ISDN User Part Continuity Indicators	Decimal
ISUP_COT	ISDN User Part Called Nature of Connection Continuity	Decimal
ISUP_GEN_ADDR	ISDN User Part Generic Address	Phone Number
ISUP_GEN_DIGITS	ISDN User Part Generic Digits	Phone Number
ISUP_GEN_NAME	ISDN User Part Generic Name	Text String
ISUP_INTERNATL	ISDN User Part International Indicator	Decimal
ISUP_INTERWRK	ISDN User Part Interworking Indicator	Decimal
ISUP_JURISDICTION	ISDN User Part Jurisdiction	Phone Number
ISUP_MT	ISDN User Part Message Type	Hex
ISUP_OLI	ISDN User Part Originating Line Information	Hex
ISUP_ORIG_CALLED	ISDN User Part Original Called Number	Phone Number
ISUP_PORTDIR	ISDN User Part Ported Directory Number	Phone Number
ISUP_QOR	ISDN User Part Forward Call Query on Release (QOR) Attempt Indicator	Decimal
ISUP_REL_CAUSE	ISDN User Part Release Cause	Decimal
ISUP_TNS	ISDN User Part Transit Network Selection	Phone Number
ISUP_TRN	ISDN User Part Forward Call Ported Number Translation Indicator	Decimal
ISUP_USI	ISDN User Part User Service Information	Hex
LIDB_BILL_NAT	Line Information Data Base Bill Network Address Translation Billing Number	Hex

Field	Description	Value Entry Format
LIDB_CCAN_SERV_DENY	Line Information Data Base Calling Card Account Number Service Denial Indicator	Hex
LIDB_CCSAN_NUM	Line Information Data Base Calling Card Subaccount Number	Phone Number
LIDB_CLD_NAT	Line Information Data Base Called Number Nature of Address	Hex
LIDB_CLD_PLN_ENC	Line Information Data Base Called Number	Hex
LIDB_CLG_NAT	Line Information Data Base Calling Nature of Address	Hex
LIDB_CLG_PLN_ENC	Line Information Data Base Calling Number	Hex
LIDB_COLLECT_ACC	Line Information Data Base Collection Acceptance Indicator	Decimal
LIDB_COMPANY_ID	Line Information Data Base Company ID	Phone Number
LIDB_ERROR_CODE	Line Information Data Base (TCAP) Error Code	Hex
LIDB_ERROR_MT	Line Information Data Base (TCAP) Error Code Tag	Hex
LIDB_MT	Line Information Data Base Message	Hex
LIDB_PIN	Line Information Data Base Personal Identification Number	Phone Number
LIDB_PIN_RESTRICT	Line Information Data Base Personal Identification Number Restriction Indicator	Hex
LIDB_PIN_SERV_DENY	Line Information Data Base Personal Identification Number Service Denial Indicator	Hex
LIDB_PROBLEM_CODE	Line Information Data Base Problem Code	Hex
LIDB_RECORD_STAT	Line Information Data Base Record Status Indicator	Hex
LIDB_THIRD_ACC	Line Information Data Base Third Number Acceptance Indicator	Decimal
LIDB_TXID	Line Information Data Base Transaction ID	Hex
LIDBQ_BILLING	Line Information Data Base Billing Number	Phone Number
LIDBQ_CALLED	Line Information Data Base Called Number	Phone Number
LIDBQ_CALLING	Line Information Data Base Calling Number	Phone Number
LIDBQ_MT	Line Information Data Base Query Message Type	Hex
LIDBR_MT	Line Information Data Base Response Message Type	Hex
MAP_HANDOVER	GSM Mobile Application Part Handover Number	Phone Number
MAP_IMEI	GSM Mobile Application Part International Mobile Equipment Identity	Phone Number
MAP_IMSI	GSM Mobile Application Part International Mobile Subscriber Identity	Phone Number
MAP_MSC	GSM Mobile Application Part Mobile Service Center Number	Phone Number
MAP_MSISDN	GSM Mobile Application Part Mobile Station ISDN Number	Phone Number
MAP_PRPHO_CID	GSM Mobile Application Part Prepare Handover Cell Identity	Reverse Hex
MAP_PRPHO_LAC	GSM Mobile Application Part Prepare Handover Location Area Code	Reverse Hex
MAP_ROAM	GSM Mobile Application Part Roaming Number	Phone Number
MAP_TMSI	GSM Mobile Application Part Temporary Mobile Subscriber Identity	Phone Number
MAP_VLR	GSM Mobile Application Part Visitor Location Registry Number	Phone Number
N00_ORIG_LATA	TR-533 Origination Local Access Transport Area	Phone Number
N00_ORIG_TYPE	TR-533 Originating Station Type	Hex
N00Q_CALLED	TR-533 Called Number	Phone Number
N00Q_CALLING	TR-533 Calling Number	Phone Number
N00Q_CARRIER	TR-533 Carrier ID	Phone Number

Field	Description	Value Entry Format
N00Q_ROUTING	TR-533 Routing Number	Phone Number
NETTST_MT	Network Test and Maintenance Message Type	Hex
OPC	Originating Point Code	Point Code
SCCP_CLD_ADDRESS	Signaling Connection Control Party Called Address	Phone Number
SCCP_CLD_IND	Signaling Connection Control Part Called Party Address Indicator	Decimal
SCCP_CLG_ADDRESS	Signaling Connection Control Part Calling Party Address	Phone Number
SCCP_CLG_IND_OCT	Signaling Connection Control Part Calling Party Address Indicator Octet	Decimal
SCCP_CLG_PC	Signaling Connection Control Part Calling Party Point Code	Point Code
SCCP_CLG_SSN	Signaling Connection Control Part Calling Party Subsystem Number	Decimal
SCCP_DLR	Signaling Connection Control Part Destination Local Reference	Hex
SCCP_GTI	Signaling Connection Control Part Global Title Indicator	Decimal
SCCP_MT	Signaling Connection Control Part Message Type	Hex
SCCP_RET_CAUSE	Signaling Connection Control Part Return Cause	Hex
SCCP_RTE_IND	Signaling Connection Control Part Routing Indicator	Decimal
SCCP_SLR	Signaling Connection Control Part Source Local Reference	Hex
SCCP_SSN	Signaling Connection Control Part Called Party Subsystem Number	Decimal
SCCP_SSN_TT	Signaling Connection Control Part Called Party Subsystem Number (if not equal to zero) or Translation Type	Decimal
SCCP_TT	Signaling Connection Control Part Translation Type	Decimal
SCCPM_MT	Signaling Connection Control Part Message Type	Hex
SI	Message Transfer Part Level Three Service Indicator	Decimal
SIGNET_CPC	Signaling Network Concerned Point Code	Point Code
SIGNET_CSLC	Signaling Network Concerned Signaling Link Code	Decimal
SIGNET_MT	Signaling Network Message Type	Hex
SLS	ISUP/TUP Signaling Link Selection	Decimal
TCAP_1ST_PARAM	Transaction Capabilities 1st Application Level Parameter within the Component portion of the TCAP message	Hex
TCAP_ABORT_CAUSE	Transaction Capabilities Application Part Abort Cause	Hex
TCAP_COMP_MT	Transaction Capabilities Application Part Component Type	Hex
TCAP_DEST_TID	Transaction Capabilities Application Part Destination transaction ID	Reverse Hex
TCAP_ERROR	Transaction Capabilities Application Part Error Code	Hex
TCAP_FLAVOR	ITU Standard =3, ANSI Standard=7	Decimal
TCAP_INVOKE_ID	Transaction Capabilities Application Part Invoke ID	Decimal
TCAP_MT	Transaction Capabilities Application Part Transaction/Package Type	Hex
TCAP_OPER	Transaction Capabilities Application Part Operation Code	Hex
TCAP_ORIG_TID	Transaction Capabilities Application Part Originating Transaction ID	Reverse Hex
TUP_CALL_CAT	Telephone User Part Calling Party's Category	Decimal
TUP_CALLED	Telephone User Part Called Number	Phone Number
TUP_CALLING	Telephone User Part Calling Number	Phone Number
TUP_CIC	Telephone User Part Circuit Identification Code	Decimal

Field	Description	Value Entry Format
TUP_INTERNATL	Telephone User Part International Indicator	Decimal
TUP_INTERWRK	Telephone User Part Interworking Indicator	Decimal
TUP_MT	Telephone User Part Message Type	Hex
TUP_REL_CAUSE	Telephone User Part Release Cause	Decimal

TABLE 61: RAW FILTER CONFIGURATION MNEMONICS

#### Raw Filter Value Entry Formats

Raw filtering is not a direct input operation. When you set up a Raw Filter, you must translate the data you are filtering for into a format the PMF subsystem can understand. Each Raw Filter value entry category has its own formatting rules. There are seven categories:

- Phone Number
- Point Code
- Decimal
- Reverse Decimal
- Hex
- Reverse Hex
- Text String

#### Phone Number

The PMF subsystem uses Telephony Binary Coded Decimal (TBCD) encoding for phone numbers. This means that phone numbers are encoded from right to left and top to bottom. If you want to search for a phone number, the user must filter for the number in this format. For example, if you want to search for the phone number string 1234 then you must input 0x2143.

- 0x: Indicator that what follows is a hexadecimal indicator.
- 2143: Phone number string 1234 in top-bottom, left-right format.

For odd numbers, such as 123-4567, an extra zero must be added to the string in order to account for the zero filler digit in the Octet. So the proper format is: 0x21436507.

- 0x: Indicator that what follows is a hexadecimal indicator.
- 214365: Phone number string 123456 in top-bottom, left-right format.
- 07: Phone number string 70 in top-bottom, left-right format, with extra zero to account for zero filler digit.

#### Point Code

Point codes need to be translated into the appropriate binary format, then converted to a hex number, or the decimal equivalent of the hex number.

#### MTP3

Unlike most point codes, MTP3 point codes are translated into binary format starting with the first number and working toward the last number. Once each point code segment is translated into the appropriate binary format, each binary number must be translated into either a hexadecimal number or its decimal equivalent. The PMF subsystem deals with two different Octet patterns.

#### ANSI

ANSI point codes are divided into three consecutive 8-bit binary Octets. So, point code 7-200-6 should be translated into:

- 7 in 8-bit: 00000111.
- 200 in 8-bit: 11001000.
- 6 in 8-bit: 00000110.

Next, use a scientific calculator to determine the hexadecimal of each number, or the decimal equivalent. For 7-200-6 this would equal:

- Hexadecimal: 07C806.
- Decimal: 509958.

So to build a raw filter for the MTP3 point code in ANSI you would use Relevant\_mnemonic = 509958.

#### ITU

ITU point codes are divided into three segments. The first is 3-bit binary. The second is 8-bit binary. The last segment is 3-bit binary. So, point code 7-200-6 should be translated into:

- 7 in 3-bit: 111
- 200 in 8-bit: 11001000
- 6 in 3-bit: 110

Next, use a scientific calculator to determine the hexadecimal of each number, or the decimal equivalent. For 7-200-6 this would equal:

- Hexadecimal: 3E46
- Decimal: 15942

So to build a raw filter for the point code in ITU you would use Relevant\_mnemonic = 15942

#### Non MTP3

For all point codes other than MTP3, the point code values need to be translated in 'reverse' order. For example, point code 7-200-6, should be translated into binary starting with 6 in 3-bit, 200 in 8-bit, and 7 in 3-bit.

#### ANSI

ANSI is divided into three consecutive 8-bit binary Octets. So, point code 7-200-6 should be translated into:

- 6 in 8-bit: 00000110
- 200 in 8-bit: 11001000
- 7 in 8-bit: 00000111

Next, use a scientific calculator to determine the hexadecimal of each number, or the decimal equivalent. For 7-200-6 this would equal:

- Hexadecimal: 06C807
- Decimal: 444423

So to build a raw filter for the point code in ANSI you would use Relevant\_mnemonic = 444423

#### ITU

ITU is divided into three Octets. The first is 3-bit binary. The second is 8-bit binary. The last Octet is 3-bit binary. So, point code 7-200-6 should be translated into:

- 6 in 3-bit: 110
- 200 in 8-bit: 11001000
- 7 in 3-bit: 111

Next, use a scientific calculator to determine the hexadecimal of each number, or the decimal equivalent. For 7-200-6 this would equal:

- Hexadecimal: 3647
- Decimal: 13895

So to build a raw filter for the point code in ITU you would use Relevant\_mnemonic = 13895

### Decimal

This is the only data type which is entered directly. To build a raw filter for a decimal type mnemonic for the value 584, you would enter Relevant\_mnemonic = 584.

### Reverse Decimal

A Reverse Decimal must first be converted into to a hex number, then the Octets must be reversed. You can use a scientific calculator to determine the hex equivalent of any decimal. For example, a value of 61873 would be:

- Hex: f1b1.
- Reversed to: b1f1

So to build a raw filter for a reverse decimal type mnemonic you would use Relevant\_mnemonic = 0xb1f1.

### Hex

Hex values are entered with a leading 0x to indicate hex. For example, a value of 842ea35c would be entered as

- 0x: Indicator that what follows is a hexadecimal indicator
- 842ea35c: Hex number

So to build a raw filter for a hex type mnemonic you would use Relevant\_mnemonic = 0x842ea35c.

### Reverse Hex

These are entered the same as Hex numbers above, except the Octets are reversed. For example, a value of 842ea35c would be entered as

- 0x: Indicator that what follows is a hexadecimal indicator
- 5ca32e84: Hex number with Octets reversed

So to build a raw filter for a reverse hex type mnemonic you would use Relevant\_mnemonic = 0x5ca32e84

### Text String

Text String is a series of successive ASCII characters. Please consult a standard ASCII character-code mapping table for the correct values. For example, to build a raw filter for the Text String "My Example" you would use Relevant\_mnemonic = 0x4d79204578616d706c65.

### Example of a SCCP Raw Filter

Shown here is an example of an SCCP protocol Raw Filter that can be created using the raw filter page.

Protocol	Raw Filter Value
MAP	(TCAP_FLAVOR=3)
IS41	((TCAP_FLAVOR=7) and (TCAP_1ST_PARAM !=97))
INAP	((TCAP_FLAVOR=3) and (SCCP_SSN=241))
CAMEL	((TCAP_FLAVOR=3) and ((SCCP_SSN=5) or (SCCP_SSN=146)))

TABLE 62: SCCP RAW FILTER EXAMPLE

The figure below shows the *Add Raw Filter* screen

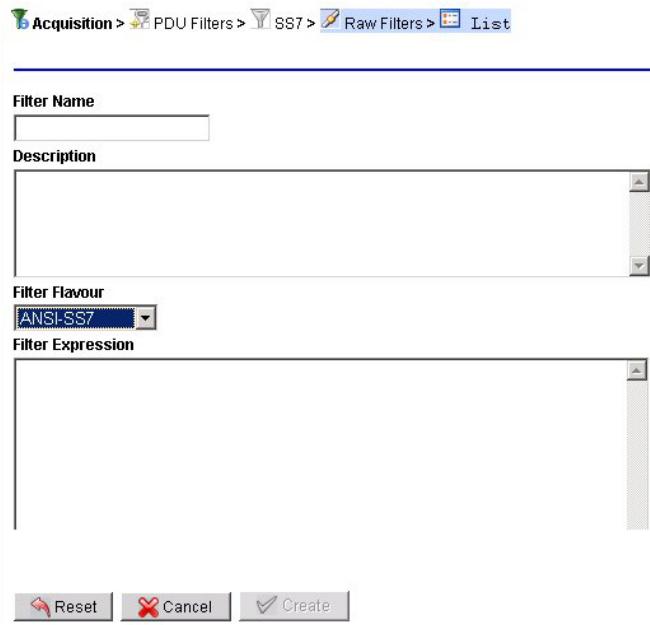


Figure 109: Add Raw Filter Screen

The following table describes the fields on the *Add Raw Filter* screen.

Field	Description
Filter Name	User defined name for filter.
Description	Enables you to add a description of the filter for added information.
Filter Flavour	Protocol / Flavour of the raw filter.
Filter Expression	Allows a user to enter data that will create a new filter. The data must be in syntax supported by the current PMF release. When the Accept button is clicked, the information in the Filter Expression window becomes the new Raw filter.
Create button	Creates or modifies filter based on the information shown in the Filter Expression field.

TABLE 63: ADD RAW FILTER SCREEN FIELDS

#### Adding a Raw Filter

Complete these steps to add a RAW filter.

1. Select **RAW Filters** from the SS7 submenu.
2. Click **Add** from the submenu. The *Add RAW Filter* screen opens.
3. Type in the **Filter Name**.
4. Select a **Filter Flavor** from the pull-down menu.
5. Type in a **Filter Expression**.
6. Click **Accept**. The filter is added to the RAW filter object tree in alphanumerical order.

#### Modifying Raw Filters

1. Select the **RAW Filter** to be modified.
2. Select **Modify** from the menu.
3. Make the necessary **modifications**.
4. Click **Modify**. The filter is modified

#### Deleting a Raw Filter

Complete these steps to delete a Raw filter.

1. Select the **RAW Filter** to be deleted.
2. Select **Delete** from the menu.
3. Click **OK** at the prompt. The filter is deleted.

### About Combination Filters

Combination filters are for data based on any combination of the other four SS7 filter types.

**Note:** The maximum size of any filter is 4000 bytes. If the Filter exceeds this constraint, an error message appears stating that the filter has exceeded the size limit.

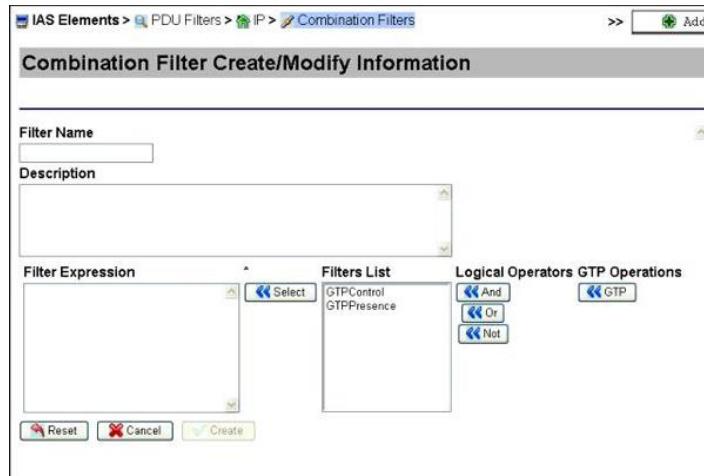


Figure 110: Add Combination Filter Screen

The table describes the fields on the *Combination Filter Create/Modify* Information screen.

Field	Description
Filter Name	User-defined name for filter.
Description	Provides pertinent information about the filter.
Filter Expression	Provides a view of the combination filter value as it is created. Selected filters and logical operators appear in this window. When the Accept button is clicked, the information in the Filter Expression window becomes the new Combination filter.
Left arrow button	Moves highlighted filter into Filter Expression box.
Filters List	List of existing filters a user can combine.
And button	Data must match all filters tied together with this operation.
Or button	Data can match both or any one of the filters tied together by this operation.
Not button	Data must match the first filter, but cannot match the second filter tied together by this operation.
Create button	Saves information entered.

TABLE 64: ADD / MODIFY COMBINATION FILTER SCREEN FIELDS

#### Adding an SS7 Combination PDU Filter

Complete these steps to add a combination filter.

**Note:** The maximum size of any filter is 4000 bytes. If the Filter exceeds this constraint, an error message appears stating that the filter has exceeded the size limit.

1. Select **Acquisition > PDU Filters**.
2. Click **Add** from the PDU Filter tool bar.
3. From the PDU Filter Family tab, select **SS7 - Signaling System 7**.
4. Click **Next**.
5. From the SS7 tab, select **Combination - Combination Filter**.
6. Click **Next**.
7. Type in the **Filter Name**.
8. (Optional) Type in a **Description**.
9. Click **Select** to select a Filter Expression.
10. Click the appropriate **Logical Operator** for the **Filters List** (And, Or, Not).
11. Click **Finish**.

The Combination filter is appears in the Combination Filters object tree in alphanumerical order.

### Modifying a Combination PDU Filter

Complete these steps to modify a combination filter.

1. Select the **Combination Filter** that needs modification.
2. Select **Modify**.
3. Modify the **appropriate information**.
4. Click **Modify**.

The changes are saved.

### Deleting a Combination PDU Filter

Complete these steps to delete a combination filter.

1. Select the **Combination Filter** to be deleted.
2. Select **Delete** from the menu.
3. Click **OK** at the prompt.

The filter is deleted.

## About GPRS Gb Filters (PMF)

The General Packet Radio Service (GPRS) Gb Filters option allows you to define the three types of filters in this type of protocol. The three types of filters are:

- Data Link Collection Identifier (DLCI) filters
- Service Access Point Identifier (SAPI) filters
- Combination filters

CCM provides a separate wizard to configure each of these Filters in this protocol.

You must provide a list of Data Link Collection Identifier DLCI values to filter at the Dataflow level. The DLCI is a field in the Frame Relay header in the GPRS Gb packet.

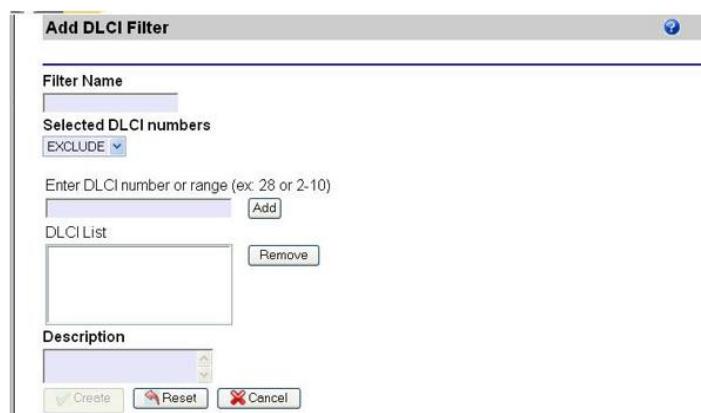


Figure 111: Add Gb DLCI Filter Screen

This table describes the fields in the DLCI filter screen.

Field	Description
Filter Name	User assigned name for the DLCI Filter.
Description (Optional)	Provides a description of the DLCI filter
Selected DLCI numbers	Drop-down menu to Include or Exclude a range of DLCI numbers.
Enter DLCI number or range	Type in either a single DLCI number or a range of DLCI numbers.
Add to list button	Adds the information entered DLCI number or range to the DLCI List.
DLCI List	Contains all of the user-specified DLCI numbers and/or ranges of DLCI numbers. You can add multiple DLCI numbers and/or ranges to this list, or remove DLCI numbers and/or ranges from the list.
	All DLCI numbers and/or ranges in this list at the time of the filter creation will be

Field	Description
	used to filter data.
Remove from list button	Deletes DLCI numbers and/or DLCI number ranges, from the DLCI List field.
Create / Reset / Cancel	<ul style="list-style-type: none"> <li>• Create: Creates and saves the DLCI Filter information.</li> <li>• Reset: Changes back to the original DLCI filter settings.</li> <li>• Cancel: No information is saved for this filter.</li> </ul>

TABLE 65: ADD DLCI FILTER SCREEN FIELDS

### **Adding a Gb DLCI Filter**

To add a Gb DLCI Filter, complete these steps.

1. Select **DLCI Filters** from the GB submenu.
2. Click **Add** from the submenu.

The Gb DLCI Filter screen opens.

**Note:** You must provide a list of Data Link Collection Identifier DLCI values to filter at the Dataflow level. The DLCI is a field in the Frame Relay header in the GPRS Gb packet.

The screenshot shows the 'Gb DLCI Filter' configuration screen. At the top, there are tabs for 'PDU Filter Family' (selected), 'GB', and 'DLCI Filters'. The 'DLCI Filters' tab is active. Below the tabs, there are two text input fields: 'Filter Name' and 'Description'. Under 'Selected DLCI numbers', there is a dropdown menu set to 'EXCLUDE'. Below this is a text input field for 'Enter DLCI number or range (ex: 28 or 2-10)' with an 'Add' button. At the bottom, there is a 'DLCI List' section with a 'Remove' button. At the very bottom of the screen are navigation buttons: 'Previous', 'Cancel', and 'Finish'.

Figure 112: Gb DLCI Filter Screen

This table describes the fields in the DLCI Filter screen.

Field	Description
Filter Name	User assigned name for the DLCI Filter.
Description (Optional)	Provides a description of the DLCI filter
Selected DLCI numbers	Drop-down menu to Include or Exclude a range of DLCI numbers.
Enter DLCI number or range	Type in either a single DLCI number or a range of DLCI numbers.
Add to list button	Adds the information entered DLCI number or range to the DLCI List.
DLCI List	Contains all of the user-specified DLCI numbers and/or ranges of DLCI numbers. You can add multiple DLCI numbers and/or ranges to this list, or remove DLCI numbers and/or ranges from the list. All DLCI numbers and/or ranges in this list at the time of the filter creation will be used to filter data.
Remove from list button	Deletes DLCI numbers and/or DLCI number ranges, from the DLCI List field.
Create / Reset / Cancel	<ul style="list-style-type: none"> <li>• Create: Creates and saves the DLCI Filter information.</li> <li>• Reset: Changes back to the original DLCI filter settings.</li> <li>• Cancel: No information is saved for this filter.</li> </ul>

TABLE 66: ADD DLCI FILTER SCREEN FIELDS

3. Type in the **Filter Name**.
4. Select a **DLCI Number Function** from the pull-down menu.
5. Type in an **DLCI Number or Number Range**.
6. Click **Add**.  
The *number* or *range* appears in the ID List field.
7. (Optional) Type in a **Description** of the DLCI filter.
8. Click **Create**.  
The *filter* is added to the GB DLCI filter object tree in alphanumerical order.

#### ***Removing a number or number range from the List***

To remove a DLCI number or number range, complete these steps.

1. Select the **DLCI Record** that needs modification.
2. Click **Edit**.
3. Select the **Number or Range** from the DLCI number list.
4. Click **Remove**.  
The *number* or *range* is removed.
5. Click **Done** to save the changes.

#### ***Modifying a Gb DLCI filter Record***

Complete these steps to modify a Gb DLCI filter.

1. Select the **Gb DLCI Filter** that needs modification.
2. Select **Modify**.
3. Modify the **appropriate information**.
4. Click **Modify**.  
The *changes* are saved.

#### ***Deleting a Gb DLCI Filter***

Complete these steps to delete a Gb DLCI filter.

1. Select the **Gb DLCI Filter** to be deleted.
2. Select **Delete** from the menu.
3. Click **OK** at the prompt.  
The *filter* is deleted.

#### ***Adding a Gb SAPI Filter (PMF)***

Complete these steps to add a Gb SAPI filter.

1. Select **Acquisition > PDU Filters** from the object menu.  
The *PDU Filters* list screen opens.
2. Click **Add** on the tool bar.  
The *PDU Filter Family* tab appears.
3. Select **GPRS** from the list.
4. Click **Next**.  
The *Gb* tab appears.
5. Select **SAPI Filter** from the list.
6. Click **Next**  
The *SAPI Filters* tab appears.

This table describes the fields in the Gb SAPI filter screen.

Field	Description
Filter Name	User assigned name for the SAPI Filter.
Description (Optional)	Provides a description of the SAPI filter
Selected SAPI numbers	Drop-down menu with options to Include or Exclude a range of SAPI numbers. (More than one) <b>Note:</b> The range of SAPI numbers is 0-15.
SAPI filter	Radio button to select a SAPI filter.
No SAPI filter	Radio button to select if there is no SAPI filter.
Add to List	After typing in a number, click this button to add the SAPI number to the List field.
Remove from List	Select a number from the List field and click this button to remove the number from the List field.
Previous / Finish / Cancel (Not shown)	<ul style="list-style-type: none"> <li>Finish: Creates and saves the SAPI Filter information.</li> <li>Previous: Takes you back to the previous screen.</li> <li>Cancel: No information is saved for this filter.</li> </ul>

TABLE 67: ADD GB SAPI FILTER SCREEN FIELDS

7. Type in the **Filter Name**.
8. (Optional) Enter the **Description**.
9. Select a **SAPI Number Function** from the pull-down menu.
10. Select to use or not use a **SAPI Filter**.
11. (Optional) If SAPI filter is selected, type in **SAPI Numbers**, (one at a time) and click **Add** to list.

**Note:** Range is 0-15.

**Note:** To remove SAPI numbers, select number(s) in the List field and click **Remove from List**.

12. Click **Finish**.  
The *filter* is added to the PDU filter list screen.

#### ***Modifying a Gb DLCI filter Record***

Complete these steps to modify a Gb DLCI filter.

1. Select the **Gb DLCI Filter** that needs modification.
2. Select **Modify**.
3. Modify the **appropriate information**.
4. Click **Modify**.  
The *changes* are saved.

#### ***Deleting a Gb DLCI Filter***

Complete these steps to delete a Gb SAPI filter.

1. Select the **Gb SAPI Filter** to be deleted.
2. Select **Delete** from the menu.
3. Click **OK** at the prompt.  
The *filter* is deleted.

#### ***Adding a GPRS Combination PDU Filter***

Complete these steps to add a combination filter.

**Note:** The maximum size of any filter is 4000 bytes. If the filter exceeds this constraint, an error message appears stating that the filter has exceeded the size limit.

1. Select **Acquisition > PDU Filters**.
2. Click **Add** from the PDU Filters tool bar.
3. From the PDU Filter Family tab, select **GPRS - General Packet Radio Service**.
4. Click **Next**.
5. From the GB tab, select **Combination - Combination Filter**.

6. Click **Next**.
7. Type in the **Filter Name**.
8. (Optional) Type in a **Description**.
9. Click **Select** to select a Filter Expression.
10. Click the appropriate **Logical Operator** for the **Filters List** (And, Or, Not).
11. Click **Finish**.

The GPRS *Combination Filter* appears in the *Combination Filters object tree* in alphanumerical order.

#### **Modifying a Gb Combination PDU Filter**

Complete these steps to modify a Gb Combination filter.

1. Select the **Gb Combination Filter** that needs modification.
2. Select **Modify**.
3. Modify the **appropriate information**.
4. Click **Modify**.

The *changes* are saved.

#### **Deleting a Gb Combination PDU Filter**

Complete these steps to delete a Gb Combination PDU filter.

1. Select the **Gb Combination PDU Filter** to be deleted.
2. Select **Delete** from the menu.
3. Click **OK** at the prompt.

The filter is deleted.

### **About IP PDU Filters**

IP Filters are used to filter based on IP addresses. IP filters allow you to limit the data forwarded by a dataflow to the IP addresses included in the Filter. There are five types of IP Filters:

- IP address Filters - Filters based on its IP Address
- Port Filters - Filters based on the port numbers (PMF only). When creating a Port Filter, you should include only those port numbers you want to obtain information about. This will filter out all Port numbers not included in your Filter.

**Note:** The range for port numbers is 1-65535. You have the option of selecting all, even, odd ports within a specified range. Port Filters have the ability to combine any overlap of ranges.

**Note:** There is a limitation of 20 entries for a port filter. An individual port number or a range are counted as one entry.

- VLAN filters - Filters
- SAPI filters - Filters based on the stream control transmission protocol numbers
- Raw filter - allow to create filters using filter string syntax and without GUI assistance (see [Appendix G: PMIA filter syntax](#))
- Combination filters - Filters based on a combination of one or more of the other filters

#### **About IP Address Filters**

IP Address Filters allow you to filter for IP addresses. When you create an IP Filter, you should include the IP addresses you want information about. This will filter out all IP addresses not included in your Filter. To create filters that filter out specific IP addresses only, you must use Combination Filters.

The add IP Filter screen is used for adding IP address Filters.

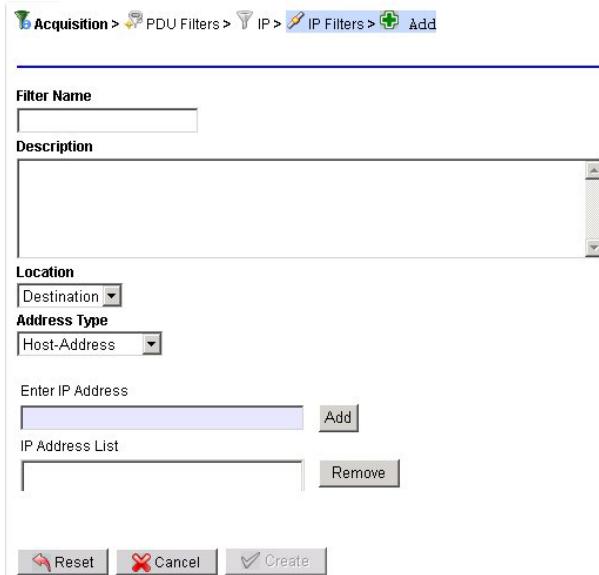


Figure 113: Add IP Address Filter Screen

Field	Description
Filter Name	User assigned name of filter. The filter name is used to identify the filter when setting up dataflows or combination filters.
Description	(Optional) Enables you to add information about the filter.
Location	Select one of the following from the drop-down menu: <ul style="list-style-type: none"> <li>Destination: Outgoing IP ports.</li> <li>Source: Incoming IP ports.</li> </ul>
Enter IP Address	Where you can add a valid IP address.
Add button	Adds the IP address to the IP Address List.
IP Address List	Shows the IP addresses that the filter uses.
Create button	Create: Creates and saves the Port Filter information.

TABLE 68: ADD / MODIFY PORT FILTER SCREEN FIELDS

#### Adding an IP Address PDU Filter

Complete these steps to add an IP Address.

1. Select **Acquisition > PDU Filters** from the object menu.  
The *PDU Filter* list screen opens.
2. Click **Add** from the tool bar.  
The *PDU Filter Family* screen opens.
3. Select **IP - Internet Protocol**.  
The *IP* tab opens.
4. Select **IP Address Filter**.  
The *IP Filters* screen opens.

Figure 114: IP Filters Screen

Field	Description
Filter Name	User assigned name of filter. The filter name is used to identify the filter when setting up dataflows or combination filters.
Description	(Optional) Enables you to add information about the filter.
Location	Select one of the following from the drop-down menu: <ul style="list-style-type: none"> <li>Destination: Outgoing IP ports.</li> <li>Source: Incoming IP ports.</li> </ul>
Address Type	Select one of the following from the drop-down menu <ul style="list-style-type: none"> <li>Host-Address : Specific address of a host</li> <li>Network-Address: An address of a network</li> </ul>
Enter IP Address	Where you can add a valid IP address.
Add button	Adds the IP address to the IP Address List.
Remove button	Removes the IP address from the list.
IP Address List	Shows the IP addresses that the filter uses.
Finish button (Not shown)	Creates and saves the Port Filter information.
Previous button (Not shown)	Takes you back to the previous (IP)screen
Cancel button (Not shown)	Cancels the procedure with no information saved.

TABLE 69: IP FILTER SCREEN FIELDS

5. Type in the **Filter Name**.
6. (Optional) Type in a **Description** of the IP Address.
7. Select a **Location** from the pull-down menu.
8. Select the **Address Type** from the *pull-down* menu.
9. Type in an **IP Address** in the *Enter IP Address* field.
10. Click **Add** to add the port to the *Port List*.
11. Click **Finish**.

The *filter* is added to the IP Address filter object tree in alphanumerical order.

#### Removing an IP Address from the List

To remove an IP Address, Complete these steps.

1. Select the **IP Address Record** that needs modification.
2. Click **Edit**.
3. Select the **IP Address** from the *IP Address List*.
4. Click **Remove**.  
The *IP Address* is removed.
5. Click **Done** to save the changes.

### Modifying an IP Address filter Record

Complete these steps to modify an IP Address filter.

1. Select the **IP Address Filter** that needs modification.
2. Select **Modify**.
3. Modify the **appropriate information**.
4. Click **Modify**.
5. The *changes* are saved.

### Deleting a IP Address Filter

Complete these steps to delete a IP Address filter.

1. Select the **IP Address Filter** to be deleted.
2. Select **Delete** from the menu.
3. Click **OK** at the prompt.


The filter is deleted.

### **About IP Port Filters**

IP Port Filters provide a means of filtering through specific ports (all, odd or even). This helps in distributing traffic to the system.

#### Listing IP Port Filters to Show Default GTP Port Filter

There is a default GTP Port Filter provided in the IP Port Filters list screen shown in the figure below.

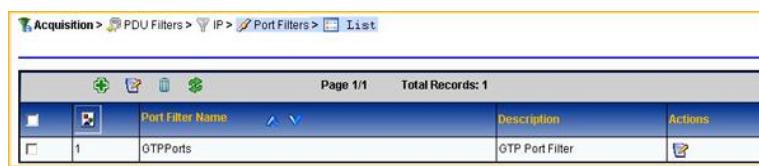

Page 1/1 Total Records: 1			
	Port Filter Name	Description	Actions
	GTPPorts	GTP Port Filter	

Figure 115: IP Port Filter Screen With GTP Port Filter Default

This Filter comes with three default GTP ports. They are:

- 2123
- 2152
- 3386

There may be network configurations that use more GTP Port Filters or different GTP Filters than the defaults provided. In this case you can modify the default Filter by completing the steps described in [Modifying a Port Record](#) and [Removing a Port from the List](#).

#### Removing a Port from the List

To remove a Port, Complete these steps.

1. Select the **Port Record** that needs modification.
2. Click **Edit**.
3. Select the **Port** from the *Port List*.
4. Click **Remove**.  
The *Port* is removed.
5. Click **Done** to save the changes.

#### Adding IP Port PDU Filters

Complete these steps to add a Port filter.

1. Select **Acquisition > PDU Filters** from the object menu.  
The *PDU Filter* list screen opens.
2. Click **Add** from the tool bar.

The PDU Filter Family screen opens.

3. Select **IP Filters**.
4. Click **Next**.
- The IP screen opens.
5. Select **PORT - IP Port Filter**.
- The *Port Filters* screen opens.

Figure 116: Add Port Filter Screen

This table describes the fields on the Add Port Filter screen.

Field	Description
Filter Name	User assigned name of filter. The filter name is used to identify the filter when setting up dataflows or combination filters.
Description	Enter pertinent information for this filter.
Location	Select one of the following from the drop-down menu: <ul style="list-style-type: none"> <li>• Destination: Outgoing IP ports.</li> <li>• Source: Incoming IP ports.</li> </ul>
Selected ports	This is a drop-down menu option with the following selections: <ul style="list-style-type: none"> <li>• Even: All even port numbers.</li> <li>• Odd: All odd port numbers.</li> <li>• All: Both odd and even numbers.</li> </ul>
Enter Port or Port range	Allows you to enter individual port numbers or a range of port numbers to be monitored.
Add	Adds the number typed in the Enter Port box to the Port List box.
Port List	Shows all of the chosen Ports being filtered.
Remove	Deletes highlighted values from the Port List box. Multiple entries can be removed at the same time.
Finish button (Not Shown)	Saves the Port Filter information to the system.

TABLE 70: PORT FILTER SCREEN FIELDS

6. Type in the **Filter Name**.
7. (Optional) Enter a **Description**.
8. Select a **Location** from the *pull-down* menu.
9. Select a **Port** from the *Selected Ports* *pull-down* menu.
10. Type in a **Port** in the *Enter Port* field.
11. Click **Add** to add the port to the *Port List*.
12. Click **Finish**.

### Modifying a Port Record

Complete these steps to modify a Port filter.

1. Select the **Port Filter** that needs modification.
2. Select **Modify**.
3. Modify the **appropriate information**.
4. Click **Modify**.

The *changes* are saved.

### Deleting a Port Filter

Complete these steps to delete a port filter.

1. Select the **Port Filter** to be deleted.
2. Select **Delete** from the menu.
3. Click **OK** at the prompt.

The *filter* is deleted.

### **About IP VLAN PDU Filters**

VLAN filtering is a user-defined filter based on VLAN ID in the Ethernet layer. It allows a user to filter IP packets of a matching VLAN tag in the Ethernet layer.

A list of up to 10 VLANS can be identified and entered during configuration. If a VLAN list is empty, then no filtering is applied for VLAN.

If the traffic is using 802.1Q VLAN tagging, then you must use a VLAN filter to pass the traffic through to an IP dataflow. This can be done using a combination filter. Conversely, if a VLAN filter is used to filter a dataflow, than any traffic that does not use VLAN tagging will not pass through the dataflow.

### Adding an IP VLAN PDU Filter

Complete these steps to add an IP VLAN filter.

1. Select **Acquisition > PDU Filters** from the object menu.  
The *PDU Filters* list screen opens.
2. Click **Next**.  
PDU Filter Family screen opens.
3. Select **IP - Internet Protocol**
4. Click **Next**.  
The *IP* screen opens.
5. Select **VLAN Filter**.
6. Click **Next**.  
The *VLAN Filters* screen opens.

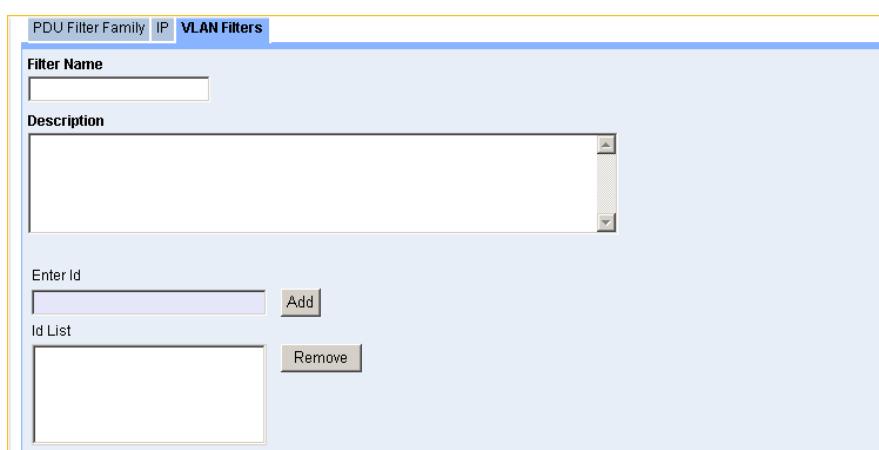


Figure 117: Add IP VLAN Filter Screen

The table describes the fields on this screen.

Field	Description
Filter Name	User-defined name for filter.
Enter Id	Type in the VLAN Id.
Add	Adds the Id information entered to the ID List.
ID List	Moves highlighted filter into Filter Expression box.
Remove	Data must match all filters tied together with this operation.
Finish button	Saves filter settings based on the information shown in the Filter Expression field.

TABLE 71: VLAN FILTER SCREEN FIELDS

1. Type in the **Filter Name**.
2. (Optional) Type in a **Description** of the VLAN Filter.
3. Type in an **ID** in the Enter ID field.
4. Click **Add**.  
The *ID* appears in the *ID List* field.
5. Click **Finish**.  
The *filter* is added to the VLAN filter object tree in alphanumerical order.

#### Removing an ID from the List

To remove an ID, Complete these steps.

1. Select the **VLAN Record** that needs modification.
2. Click **Edit**.
3. Select the **ID** from the *ID List*.
4. Click **Remove**.  
The *ID* is removed.
5. Click **Done** to save the changes.

#### Modifying an IP VLAN Filter Record

Complete these steps to modify an IP VLAN filter.

1. Select the **IP VLAN Filter** that needs modification.
2. Select **Modify**.
3. Modify the **appropriate information**.
4. Click **Modify**.  
The changes are saved.

#### Deleting a IP VLAN PDU Filter

Complete these steps to delete an IP VLAN filter.

1. Select the **IP VLAN Filter** to be deleted.
2. Select **Delete** from the menu.
3. Click **OK** at the prompt.  
The Filter is deleted.

#### About SAPI Filters

SAPI filtering is a user-defined filter based on in the Ethernet layer. It allows a user to filter IP packets of a matching VLAN tag in the Ethernet layer.

#### Adding a IP SAPI Filter (PMF)

Complete these steps to add a IP SAPI filter.

1. Select **Acquisition > PDU Filters** from the object menu.  
The *PDU Filters* list screen opens.

2. Click **Add** on the tool bar.  
The *PDU Filter Family* tab appears.
3. Select **IP** from the list.
4. Click **Next**.  
The *IP* tab appears.
5. Select **SAPI Filter** from the list.
6. Click **Next**  
The *SAPI Filters* tab appears.

Figure 118: Add SAPI for Gb over IP Filter Screen

This table describes the fields in the Gb SAPI filter screen.

Field	Description
Filter Name	User assigned name for the SAPI Filter.
Description (Optional)	Provides a description of the SAPI filter
Selected SAPI numbers	Drop-down menu to Include or Exclude a range of SAPI numbers.
SAPI filter	Radio button to select a SAPI filter. The range for a SAPI filter can be from 0-16.
No SAPI filter	Radio button to select if there is no SAPI filter.
Previous / Finish / Cancel (not shown)	<ul style="list-style-type: none"> <li>• Finish: Creates and saves the SAPI Filter information.</li> <li>• Previous: Takes you back to the previous screen.</li> <li>• Cancel: No information is saved for this filter.</li> </ul>

TABLE 72: ADD SAPI FILTER FOR GP OVER IP SCREEN FIELDS

7. Type in the **Filter Name**.
8. (Optional) Enter the **Description**.
9. Select a **SAPI Number Function** from the *pull-down* menu (include or exclude).
10. Select to use or not use a **SAPI Filter**.
11. Click **Finish**.

The *filter* is added to the PDU filter list screen.

#### Modifying a SAPI Filter for Gb over IP

Complete these steps to modify a Gb over IP PDU filter.

1. Select the **SAPI Gb over IP Filter** that needs modification.
2. Select **Modify**.
3. Modify the **appropriate information**.
4. Click **Modify**.

The *changes* are saved.

### Deleting a SAPI Filter for Gb over IP

Complete these steps to delete a SAPI for Gb over IP filter.

1. Select the **Gb SAPI for Gb over IP Filter** to be deleted.
2. Select **Delete** from the menu.
3. Click **OK** at the prompt.  
The *filter* is deleted.

### About IP Raw Filter

IP Raw filters are used to configure filter using filter string expressions which follow PMIA filter syntax, which is described in [Appendix G: PMIA filter syntax](#).

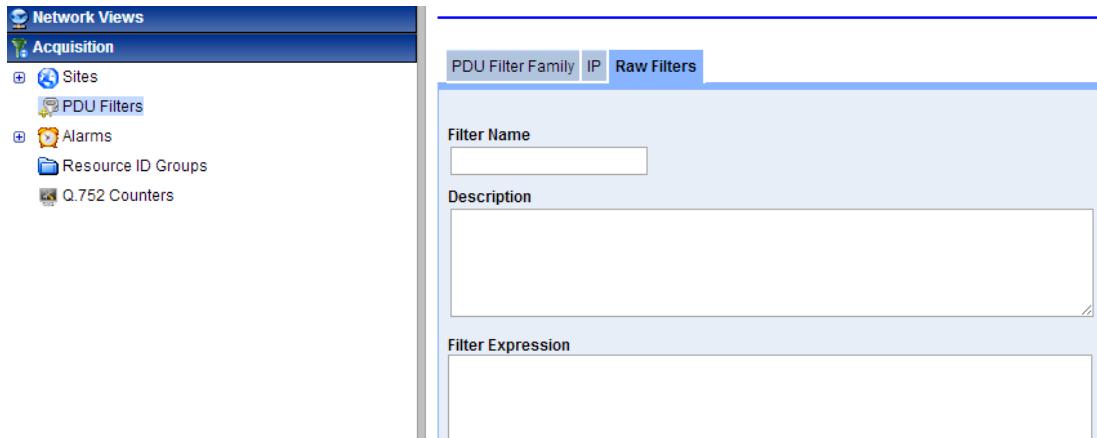


Figure 119: IP Raw Filters Screen

### About IP Combination Filters

Combination filters are for using the existing IP and Port (Gb) filters to filter for information. The various operators can be used to filter in or filter out information.

**Note:** The maximum size of any filter is 4000 bytes. If the filter exceeds this constraint, an error message appears stating that the filter has exceeded the size limit.

#### Adding an IP PDU Combination Filter

Complete these steps to add an IP Combination filter..

1. Select **Acquisition > PDU Filters** from the object menu.  
The *PDU Filters* screen opens.
2. Click **Add** from the tool bar.  
The *PDU Filter Family* screen opens.
3. Select **IP-Internet Protocol**.
4. Click **Next**.  
The *IP* screen opens.
5. Select **IP Combination Filter**  
The *Combination Filters* screen opens.

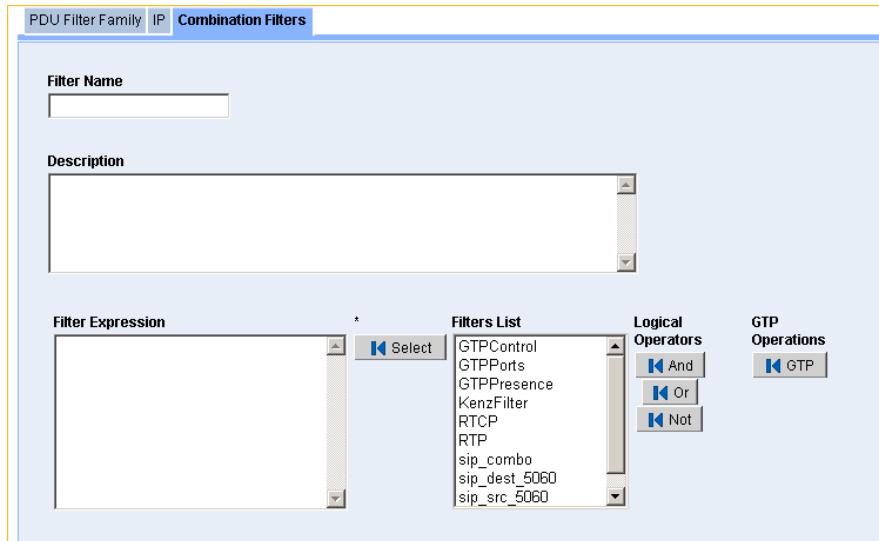


Figure 120: Combination Filters Screen

The table describes the fields on this screen.

Field	Description
Filter Name	User-defined name for filter.
Filter Description	Enter pertinent information for the combination filter.
Filter Expression	Provides a view of the combination filter value as it is created. Selected filters and logical operators appear in this window. When the Accept button is clicked, the information in the Filter Expression window becomes the new Combination filter.
Filter List	List of existing filters a user can combine.
Select button	Moves highlighted filter into Filter Expression box.
And button	Data must match all filters tied together with this operation.
Or button	Data can match both or any one of the filters tied together by this operation.
Not button	Data must match the first filter, but cannot match the second filter tied together by this operation.
GTP button in GTP Operations Section	Using GTP operations allows you to filter IP packets that contain a GTP layer by performing one of the following GTP operations within the GTP layer. <ul style="list-style-type: none"> <li>• GTP Presence: Can be defined, if the GTP layer is contained in the packet.</li> <li>• GTP Control: Can be defined, if the GTP layer contains control plane or data plane.</li> </ul>
Finish button (not shown)	Saves the information to the system.

TABLE 73: COMBINATION FILTER SCREEN FIELDS

6. Type in the **Filter Name**.
7. (Optional) Type in a **Description** of the Filter.
8. Type in or select a **Filter Expression** in the *Filter Expression* field.
9. Click **Select**.  
The expression is added to the Filters List.
10. Select a **Logical Operator** (And, Or, Not), by clicking the appropriate Operator from the *pull-down* menu.

**Note:** IF you use a GTP filter in a Combination Filter, you may want to specify the “OR” condition with the GTP Control filter in order to pass GTP-C-PDUs.

**Note:** The VLAN filter can be used in the Filter Expression, but is limited to use of only 1 VLAN filter an expression. As an example, v1 and v2 are VLAN filters; f1 filter:

- Correct: v1 and f1
- Correct: not (v1) and f1
- Incorrect: f1 and v1

- Incorrect: not (v1 and f1)

If applicable, click to select a **GTP Operation** and specify the **GTP Expression** within the parenthesis.

**Note:** Example of a correct GTP Combination Filter: GTP (src5000 and dest500) or GTPControl.

**Note:** Example of an incorrect GTP Combination Filter GTP (src5000 and dest500 and GTPControl). The correct GTP filter has GTPControl outside of the GTP expression contained within the parenthesis.

#### 11. Click **Done**.

The *Combination Filter* is added to the object tree in alphanumerical order.

#### Modifying an IP Combination Filter

Complete these steps to modify an IP Combination filter.

1. Select the **IP Combination Filter** that needs modification.
2. Select **Modify**.
3. Modify the **appropriate information**.
4. Click **Modify**.

The *changes* are saved.

#### Deleting an IP Combination Filter

Complete these steps to delete an IP Combination filter.

1. Select the **IP Combination Filter** to be deleted.
2. Select **Delete** from the menu.
3. Click **OK** at the prompt.

The *filter* is deleted.

### About SigTran Protocol Filters

**Note:** See [About PMF Sigtran configuration use case](#) to have an overview of the configuration of PMF with Sigtran network.

There are four categories of SigTran Protocol filters:

- Association Filters - Stream Control Transmission protocol (SCTP) filters as well as other Association Filters
- SS7 Protocol Filters - Point Code (PC), Service Information Octet (SIO), Global Title (GT) and Subsystem Number (SSN) Filters
- Data Chunk Payload Protocol Identifier filter - Filter for SCTP Payload Protocol Identifier field (M2UA, M3UA, SUA, M2PA, H248/MEGACO, BICC, H323 or Other values)
- Raw filter - allow to create filters using filter string syntax and without GUI assistance (see [Appendix G: PMIA filter syntax](#))
- Combination - Filters for data based on any combination of the other SigTran Filter Types.

#### **About SigTran Association Filters**

There are two types of SigTran Association filters:

- Stream Control Transmission protocol (SCTP) filters
- Other Association filters

#### Adding a SigTran SCTP PDU Filter

Complete these steps to add a SigTran SCTP PDU filter.

1. Select **Acquisition > PDU Filters** from the object menu.

The *PDU Filters* list screen opens.

2. Click **Add**.  
PDU Filter Family screen opens.
3. Select **SigTran - Protocol**
4. Click **Next**.  
The *SigTran* screen opens.
5. Select **SCTP Association Filter**.
6. Click **Next**.  
The *SigTran Association Filters* screen opens.

The table describes the fields on this screen.

Field	Description
Filter Name	Alphanumeric field providing name of the filter
Description	(Optional) Alphanumeric field for short description of the filter
IP Protocol ID	Pull-down list (SCTP only selection).
Local Port	Numeric field that provides location of port.
Local IP Address	IP address for local port
Remote Port	Numeric field that provides port for association
Remote IP Address	IP address for the remote port for association
Add to List	Button to add association to list
Association List	List box showing associations
Remove from List	Button to remove selected associations from list

TABLE 74: SCTP ASSOCIATION FILTER SCREEN FIELDS

7. Enter the **Filter Name**.
8. (Optional) Enter a **Description** of the SCTP filter.
9. Select the **IP Protocol ID**
10. Enter a **Local Port**.
11. Enter the **Local IP Address**.
12. Enter the **Remote Port**.
13. Enter the **Remote Port IP Address**
14. Click **Add to List** to add the association to the *Association List*.
  - a. Repeat steps 11-15 to add more associations.
15. Click **Finish**.  
The filter appears in the PDU filter list.
16. **Apply Changes** to the xMF system to update the system.

#### Modifying a SigTran SCTP PDU Filter

Complete these steps to modify a SigTran SCTP filter.

1. Select the **SigTran SCTP Filter** that needs modification.
2. Select **Modify**.
3. Modify the **appropriate information**.
4. Click **Modify**.  
The *changes* are saved.

#### Deleting a SigTran SCTP PDU Filter

Complete these steps to delete a SigTran SCTP filter.

1. Select the **SigTran SCTP Filter** to be deleted.
2. Select **Delete** from the menu.
3. Click **OK** at the prompt.
4. The *filter* is deleted.

#### Adding a SigTran Other Association PDU Filter

Complete these steps to add a SigTran Other Association filter.

1. Select **Acquisition > PDU Filters** from the object menu.  
The *PDU Filters* list screen opens.
2. Click **Next**.  
*PDU Filter Family* screen opens.
3. Select **SigTran Filter**
4. Click **Next**.  
*The SigTran* screen opens.
5. Select **SigTran Other Association**.
6. Click **Next**.  
*The SigTran OtherProt Assoc Filter* screen opens.

The screenshot shows the 'Sigtran OtherProt Assoc Filter' screen. At the top, there are three tabs: 'PDU Filter Family', 'SIGTRAN', and 'Sigtran OtherProt Assoc Filter' (the last one is highlighted in blue). Below the tabs, there are several input fields and buttons:

- 'Filter Name': A text input field.
- 'Description': A large text area with a vertical scroll bar.
- 'Protocol ID': A text input field.
- 'Local Port' and 'Local IP Address': Two adjacent text input fields.
- 'Remote Port' and 'Remote IP Address': Two adjacent text input fields.
- 'Add to List': A button with a plus sign icon.
- 'Selected List': A scrollable list area.
- 'Remove from List': A button with a minus sign icon.

Figure 121: SigTran OtherProt Assoc Filter Screen

The table describes the fields on this screen.

Field	Description
Filter Name	Alphanumeric field providing name of the filter
Description	(Optional) Alphanumeric field for short description of the filter
IP Protocol ID	Pull-down list (SCTP only selection).
Local Port	Numeric field that provides location of port.
Local IP Address	IP address for local port
Remote Port	Numeric field that provides port for association
Remote IP Address	IP address for the remote port for association
Add to List	Button to add association to list
Association List	List box showing associations
Remove from List	Button to remove selected associations from list

TABLE 75: SIGTRAN OTHERPROT ASSOC FILTER SCREEN FIELDS

7. Type in the **Filter Name**.
8. (Optional) Type in a **Description** of the VLAN filter.
9. Enter in an **IP Protocol ID** (positive number).
10. (Optional) Enter **Local Port** and **Local IP Address**.
11. (Optional) Enter **Remote Port** and **Remote IP Address**.
12. (If ports and addresses have been entered) Click **Add to List**.
13. Click **Finish**.

The *filter* is added.

#### Modifying a SigTran Other Association PDU Filter

Complete these steps to modify a SigTran Other Association filter.

1. Select the **SigTran Other Association Filter** that needs modification.
2. Select **Modify**.
3. Modify the **appropriate information**.
4. Click **Modify**.

The changes are saved.

#### Deleting a SigTran Other Association PDU Filter

Complete these steps to delete a SigTran Other Association filter.

1. Select the **SigTran Other Association Filter** to be deleted.
2. Select **Delete** from the menu.
3. Click **OK** at the prompt.

The *filter* is deleted.

#### *About SigTran SS7 Protocol Filters*

There are four types of SigTran SS7 filters:

- Point Code (PC)
- Service Information Octet Filter (SIO)
- Global Title (GT)
- Subsystem Number (SSN)

#### Adding a SigTran SS7 PC PDU Filter

Complete these steps to add a SigTran SS7 Point Code filter.

1. Select **Acquisition > PDU Filters** from the object menu.  
The *PDU Filters* list screen opens.
2. Click **Next**.  
*PDU Filter Family* screen opens.

3. Select **SigTran Filter**
4. Click **Next**.  
The *SigTran* screen opens.
5. Select **SS7 Protocol Filter**.  
The *SigTran SS7 Filters* screen opens.
6. Select **Point Code Filter**.
7. Click **Next**.  
The *SigTran PC Filters* screen opens.

The table describes the fields on this screen.

Field	Description
Filter Name	User-defined name for filter.
Description	Enables you to describe the characteristics of the filter
Select Flavor	Provides the protocol for specified point code or point code range
Protocol	Shows the protocols you can use: <ul style="list-style-type: none"> <li>• M2PA/SCTP</li> <li>• M3UA/SCTP</li> <li>• M2UA/SCTP</li> </ul>
PC Type	Lists the types of point codes: <ul style="list-style-type: none"> <li>• PC</li> <li>• OPC</li> <li>• DPC</li> </ul>
Point Code	Enter point code(s) to be used
Add to List	Adds the Id information entered to the Association List.
Remove from List	Removes the selected port from the Association List.
PC List	Lists the added point codes
Logical Operators	Provides the following operators: <ul style="list-style-type: none"> <li>• And = conjunction between two sub-filters</li> <li>• Or = disjunction between two sub-filters</li> <li>• Not = operator means negation of the sub-filter</li> <li>• ( ) = used to group sub-filters and modify the priority of operators</li> </ul>
Filter Expression	Shows the finished expression to be used
Finish button (not shown)	Saves filter settings based on the information shown in the Filter Expression field.

TABLE 76: SIGTRAN PC FILTER SCREEN FIELDS

8. Type in the **Filter Name**.
9. (Optional) Type in a **Description** of the SigTran filter.
10. Select a **Flavor** from the list.
11. Select a **Protocol**.
12. Select a **PC Type** and enter **Point Code**.
13. Click **Add to List**.
14. Select the appropriate **Logical Operator(s)**.
15. Click **Finish**.

The *filter* is added.

**Note:** Sigtran filters can be combined using the Combination Filter operation.

**Note:** A choice can be made at this point to use "chunk forwarding" or to the forward whole IP packet (IP raw).

**Note:** To complete the filtering process the filter must be connected with a data flow, traffic classification and Dataflow process in IXP. See Routing PDUs to xDR Builders for SigTran or Routing PDUs to xDR Builders for more information.

#### Modifying a SigTran SS7 PC PDU Filter

Complete these steps to modify a SigTran SS7 PC Filter:

1. Select the **SigTran SS7 PC Filter** that needs modification.
2. Select **Modify**.
3. Modify the **appropriate information**.
4. Click **Modify**.  
The changes are saved.

#### Deleting a SigTran SS7 PC PDU Filter

Complete these steps to delete a SigTran SS7 PC filter.

1. Select the **SigTran SS7 PC Filter** to be deleted.
2. Select **Delete** from the menu.
3. Click **OK** at the prompt.  
The *filter* is deleted.

#### Adding a SigTran SS7-SIO PDU Filter

1. Select **Acquisition > PDU Filters**.
2. Click **Add** on the tool bar.
3. Select **SigTran - Protocol**.
4. Click **Next**.
5. Select **SS7 Protocol Filters**.
6. Click **Next**.
7. Select **SIO Filter**.
8. Click **Next**.
9. Select **NISI (Network Indicator + Service Indicator)**.

**Note:** If only SI is selected, there is no need to select a Network Indicator.

10. Click **Next**.

The table describes the fields on the SIO screen.

Field	Description
Filter Name	User-defined name for filter.
Description	Enables you to describe the characteristics of the filter
Protocol	Shows the protocols you can use: <ul style="list-style-type: none"> <li>• M2PA</li> <li>• M3UA</li> <li>• M2UA</li> </ul>
Network Indicator	Lists the network indicators available: <ul style="list-style-type: none"> <li>• National</li> <li>• International</li> </ul>
Service Indicator	Lists the service indicators available: <ul style="list-style-type: none"> <li>• Signaling Network Management Messages</li> <li>• Signaling Network Testing and Maintenance Messages</li> <li>• Signaling Network Testing and Maintenance Special Messages</li> <li>• SCCP</li> <li>• Telephone User Part</li> <li>• ISDN User Part</li> <li>• Broadband User Part</li> <li>• Satellite ISDN User Part</li> <li>• AAL Type 2 Signaling</li> <li>• Bearer Independent Call Control</li> <li>• Gateway Control Protocol</li> <li>• Other</li> </ul>
Value	Called
Add to List	Adds the Id information entered to the SIO List.
SIO List	Shows all SI + NI combinations added.

Field	Description
Select	Selects the highlighted SIO and places it in the Filter Expression Field
Filter Expression	Shows the expressions that have been created in the SIO list.
Logical Operators	Provides the following operators: <ul style="list-style-type: none"> <li>• And = conjunction between two sub-filters</li> <li>• Or = disjunction between two sub-filters</li> <li>• Not = operator means negation of the sub-filter</li> <li>• ( ) = used to group sub-filters and modify the priority of operators</li> </ul>
Select / Remove buttons	Clicking Select, adds a highlighted SIO to the Filter Expression Field. Clicking Remove removes the highlighted SIO from the list in the Filter Expression field.
Finish button (not shown)	Saves filter settings based on the information shown in the Filter Expression field.

TABLE 77: SIGTRAN SS7 SIO SCREEN FIELDS

11. Enter in the **Filter Name**.
12. (Optional) Enter a **Description**.
13. Select the **Protocol** for the filter.
14. Select a **Network Indicator** and **Service Indicator**.

**Note:** Choose from either the pre-defined list or select **Other**. If Other is selected, the specific Service Indicator is manually entered.

15. Click **Add** to list.
16. Select the **SIO** from the **SIO** list.
17. Click **Select** to add the expression to the Filter Expression list.

To remove an expression from the field, click **Remove** on the bottom right side of the screen.

**Note:** To create a more complex expression, use the **Logical Operator(s)**. A name then can be assigned to the filter as well as a description of the filter.

**Note:** More than one filter can be created.

**Note:** This filter can be used in conjunction with other filters using the Combination filter option.

18. Click **Finish** to accept the values.

**Note:** Sigtran filters can be combined using the Combination Filter operation.

**Note:** A choice can be made at this point to use "chunk forwarding" or to the forward whole IP packet (IP raw.).

**Note:** To complete the filtering process the filter must be connected with a data flow, traffic classification and dataflow process in IXP. See Routing PDUs to xDR Builders for SigTran or Routing PDUs to xDR Builders for more information.

#### Modifying a SigTran SS7-SIO PDU Filter

Complete these steps to modify a SigTran SS7-SIO PDU Filter:

1. Select the **SigTran SS7-SIO Filter** that needs modification.
2. Click **Modify** on the tool bar.
3. Modify the **appropriate information**.
4. Click **Modify**.
5. The *changes* are saved.

#### Deleting a SigTran SS7 SIO PDU Filter

Complete these steps to delete a SigTran SS7 SIO PDU Filter:

1. Select the **SigTran SS7 SIO PDU Filter** to be deleted.
2. Click **Delete** on the tool bar.
3. Click **OK** at the prompt.
4. The *filter* is deleted.

## Adding a SigTran GT PDU Filter

1. Select **Acquisition > PDU Filters**.
2. Click **Add** on the tool bar.
3. Select **SigTran - Protocol**.
4. Click **Next**.
5. Select **SS7 Protocol Filters**.
6. Click **Next**.
7. Select **Global Title**.

**Note:** If No Global Title is selected then complete steps 9-13 before clicking Finish.

**Note:** In step 13 only Call Type is used for Non-Global Title SigTran filters.

8. Click **Next** to move to the Global Title filter screen.

The table describes the fields on the Global Title screen.

Field	Description
Filter Name	User-defined name for filter.
Description	Enables you to describe the characteristics of the filter
Protocol	Shows the protocols you can use: <ul style="list-style-type: none"> <li>• M2PA</li> <li>• M3UA</li> <li>• M2UA</li> </ul>
SCCP Format	Lists the SCCP formats available: <ul style="list-style-type: none"> <li>• ITU</li> <li>• ANSI</li> </ul>
MTP3 Format	Lists the MTP3 formats available: <ul style="list-style-type: none"> <li>• ITU</li> <li>• ANSI</li> <li>• Japan</li> </ul>
Call Type	Lists the three different call types available: <ul style="list-style-type: none"> <li>• Calling</li> <li>• Called</li> <li>• Both</li> </ul>
Numbering Plan	Lists the different numbering plans available: <ul style="list-style-type: none"> <li>• Unknown</li> <li>• ISDN/telephony numbering plan - E.164</li> <li>• Generic</li> <li>• Data numbering plan - X.121</li> <li>• Telex numbering plan - F.69</li> <li>• Maritime mobile numbering plan - E.210/E.211</li> <li>• Land mobile numbering plan - E.212</li> <li>• ISDN/mobile numbering plan - E.214</li> <li>• Private network or Network-specific numbering plan</li> <li>• Reserved</li> </ul>
Nature of Address	<ul style="list-style-type: none"> <li>• International</li> <li>• National</li> </ul>
Global Title Value	A valid number.
Add to List	Adds the Id information entered to the GT List.
GT List	Show list of GT combinations created
Filter Expression	Shows the expressions and combinations that have been created from the use of the GT list and operators.
Logical Operators	Provides the following operators: <ul style="list-style-type: none"> <li>• And = conjunction between two sub-filters</li> <li>• Or = disjunction between two sub-filters</li> <li>• Not = operator means negation of the sub-filter</li> </ul>

Field	Description
	• ( ) = used to group sub-filters and modify the priority of operators
Select / Remove buttons	Clicking Select, adds a highlighted SIO to the Filter Expression Field. Clicking Remove removes the highlighted SIO from the list in the Filter Expression field.
Finish button (not shown)	Saves filter settings based on the information shown in the Filter Expression field.

TABLE 78: SIGTRAN SS7 GLOBAL TITLE (GT) SCREEN FIELDS

9. Enter in the **Filter Name**.
10. (Optional) Enter a **Description**.
11. Select the **Protocol** for the filter.
12. Select a **SCCP and MTP3 Format**.
13. Select a **Call Type, Numbering Plan, Nature of Address, and Global Title Value**
14. Click **Add** to list.
15. Select the **GT** from the **GT list**.
16. Click **Select** to add the expression to the Filter Expression list.  
To remove an expression from the field, click **Remove** on the bottom right side of the screen.

**Note:** To create a more complex expression, use the **Logical Operator(s)**. A name then can be assigned to the Filter as well as a description of the filter.

**Note:** More than one filter can be created.

**Note:** This filter can be used in conjunction with other filters using the Combination Filter option.

17. Click **Finish** to accept the values.

**Note:** Sigtran filters can be combined using the Combination Filter operation.

**Note:** A choice can be made at this point to use "chunk forwarding" or to forward the whole IP packet (IP raw.).

**Note:** To complete the filtering process the filter must be connected with a data flow, traffic classification and dataflow process in IXP. See Routing PDUs to xDR Builders for SigTran or Routing PDUs to xDR Builders for more information.

#### Modifying a SigTran GT PDU Filter

Complete these steps to modify a SigTran GT PDU Filter:

1. Select the **SigTran GT PDU Filter** that needs modification.
2. Click **Modify** on the tool bar.
3. Modify the **appropriate information**.
4. Click **Modify**.  
The *changes* are saved.

#### Deleting a SigTran GT PDU Filter

Complete these steps to delete an SigTran GT Filter:

1. Select the **SigTran GT Filter** to be deleted.
2. Click **Delete** on the tool bar.
3. Click **OK** at the prompt.  
The *filter* is deleted.

#### Adding a SigTran SS7 SSN PDU Filter

Complete these steps to add a SigTran SS7 SSN Filter:

1. Select **Acquisition > PDU Filters** from the object menu.  
The *PDU Filters* list screen opens.
2. Click **Add** on the tool bar.  
*PDU Filter Family* screen opens.

3. Select **SigTran - Protocol**
4. Click **Next**.  
The *SigTran* screen opens.
5. Select **SS7 Protocol Filter**.  
The *SigTran SS7 Filters* screen opens.
6. Select **SS7 - Subsystem Number Filter**.
7. Click **Next**.
8. Select **Subsystem Number**.
9. Click **Next**.

The table describes the fields on this screen.

Field	Description
Filter Name	User-defined name for filter.
Description	Enables you to describe the characteristics of the filter
Protocol	Lists the sigtran protocols to use: <ul style="list-style-type: none"> <li>• M2PA</li> <li>• M3UA</li> <li>• M2UA</li> </ul>
SCCP Format	Lists the types of sccp formats available: <ul style="list-style-type: none"> <li>• ITU</li> <li>• ANSI</li> </ul>
MTP3 Format	Lists the MTP3 formats available: <ul style="list-style-type: none"> <li>• ITU</li> <li>• ANSI</li> <li>• Japan</li> </ul>
Calling Type	Lists the call type to be used: <ul style="list-style-type: none"> <li>• Calling</li> <li>• Called</li> <li>• Both</li> </ul>
Subsystem Number Value	Enter the Subsystem Number Value to be used for the filter. (Range is integer 1-255)
Add to List	Adds the subsystem value to the SSN List.
Remove from List	Removes the subsystem value to the SSN List.
Logical Operators	Provides the following operators: <ul style="list-style-type: none"> <li>• And = conjunction between two sub-filters</li> <li>• Or = disjunction between two sub-filters</li> <li>• Not = operator means negation of the sub-filter</li> <li>• ( ) = used to group sub-filters and modify the priority of operators</li> </ul>
Select	Places a selected SSN and moves it to the filter expression list.
Filter Expression	Shows the finished expression to be used
Finish button	Saves filter settings based on the information shown in the Filter Expression field.

TABLE 79: SIGTRAN SS7 SSN FILTER SCREEN FIELDS

10. Type in the **Filter Name**.
11. (Optional) Type in a **Description** of the SigTran Filter.
12. Select a **Protocol** to be used.
13. Select a **SCCP Format** to be used.
14. Select a **MTP3 Format** to be used.
15. Select the **Call Type** to be used.
16. Enter the **Subsystem Number Value** to be used.
17. Click **Add** to List to place the SSN in the SSN List.
18. (Optional) Repeat steps 16 & 17 to place more SSN values in the SSN list field.
19. Select an **SSN** and click **Select** to place it in the Filter Expression field.
20. (Optional) **Select** the appropriate **Logical Operator(s)** to create more complex expressions.
21. Repeat steps 18 & 19 if more complex expressions are needed.

22. Click **Finish**.

The *filter* is added.

**Note:** Sigtran filters can be combined using the Combination Filter operation.

**Note:** A choice can be made at this point to use "chunk forwarding" or to forward the whole IP packet (IP raw.)

**Note:** To complete the filtering process the filter must be connected with a data flow, traffic classification and dataflow process in IXP. See Routing PDUs to xDR Builders for SigTran or Routing PDUs to xDR Builders for more information.

## Adding a SigTran SS7 SSN PDU Filter-No Subsystem Number

Complete these steps to add a SigTran SS7 SSN Filter:

1. Select **Acquisition > PDU Filters** from the object menu.  
The *PDU Filters* list screen opens.
2. Click **Add** on the tool bar.  
*PDU Filter Family* screen opens.
3. Select **SigTran - Protocol**
4. Click **Next**.  
The *SigTran* screen opens.
5. Select **SS7 Protocol Filter**.  
The *SigTran SS7 Filters* screen opens.
6. Select **SS7 - Subsystem Number Filter**.
7. Click **Next**.
8. Select **No Subsystem Number**.
9. Click **Next**.

The table describes the fields on this screen.

Field	Description
Filter Name	User-defined name for filter.
Description	Enables you to describe the characteristics of the filter
Protocol	<p>Lists the sigtran protocols to use:</p> <ul style="list-style-type: none"> <li>• M2PA</li> <li>• M3UA</li> <li>• M2UA</li> </ul>
SCCP Format	<p>Lists the types of sccp formats available:</p> <ul style="list-style-type: none"> <li>• ITU</li> <li>• ANSI</li> </ul>
MTP3 Format	<p>Lists the MTP3 formats available:</p> <ul style="list-style-type: none"> <li>• ITU</li> <li>• ANSI</li> <li>• Japan</li> </ul>
Calling Type	<p>Lists the call type to be used:</p> <ul style="list-style-type: none"> <li>• Calling</li> <li>• Called</li> <li>• Both</li> </ul>
Subsystem Number Value	Enter the Subsystem Number Value to be used for the filter. (Range is integer 1-255)
Add to List	Adds the subsystem value to the SSN List.
Remove from List	Removes the subsystem value to the SSN List.
Logical Operators	<p>Provides the following operators:</p> <ul style="list-style-type: none"> <li>• And = conjunction between two sub-filters</li> <li>• Or = disjunction between two sub-filters</li> <li>• Not = operator means negation of the sub-filter</li> <li>• ( ) = used to group sub-filters and modify the priority of operators</li> </ul>

Field	Description
Select	Places a selected SSN and moves it to the filter expression list.
Filter Expression	Shows the finished expression to be used
Finish button	Saves filter settings based on the information shown in the Filter Expression field.

TABLE 80: SIGTRAN SS7 SSN FILTER SCREEN FIELDS

10. Type in the **Filter Name**.
11. (Optional) Type in a **Description** of the SigTran Filter.
12. Select a **Protocol** to be used.
13. Select a **SCCP Format** to be used.
14. Select a **MTP3 Format** to be used.
15. Select the **Call Type** to be used.
16. Click **Finish**.
17. The *filter* is added.

#### Modifying a SigTran SS7 SSN PDU Filter

Complete these steps to modify a SigTran SS7 SSN Filter:

1. Select the **SigTran SS7 SSN Filter** that needs modification.
2. Select **Modify**.
3. Modify the **appropriate information**.
4. Click **Modify**.

The *changes* are saved.

#### Deleting a SigTran SS7 SSN PDU Filter

Complete these steps to delete a SigTran SS7 SSN Filter:

1. Select the **SigTran SS7 SSN Filter** to be deleted.
2. Select **Delete** from the menu.
3. Click **OK** at the prompt.

The *filter* is deleted.

#### **About SigTran Data Chunk Payload Protocol Identifier filter**

##### Adding a SigTran Data Chunk Payload Protocol Identifier Filter

Complete these steps to add a SigTran Data Chunk Payload Protocol Identifier Filter:

1. Select Acquisition > PDU Filters from the object menu.  
The *PDU Filters* list screen opens.
2. Click **Add** on the tool bar.  
*PDU Filter Family* screen opens.
3. Select **SigTran - Protocol**
4. Click **Next**.  
*The SigTran* screen opens.
5. Select **Data Chunk Payload Protocol Identifier filter**.  
*The SigTran Data Chunk Payload Protocol Identifier Filters* screen opens.

Field	Description
Filter Name	User assigned name for the DCPPI Filter.
Description (Optional)	Provides a description of the DCPPI filter
Selected DCPPI numbers	Drop-down menu to Include or Exclude a list of DCPPI numbers.
Chunck Type	Already defined DCPPI (M2UA, M3UA, SUA, M2PA, H248/MEGACO, BICC, H323) or Other DCPPI numbers if <b>Chunk Type</b> is not already defined in the <b>Chunk Type</b> list
Add to list button	Adds the information entered DCPPI <b>Chunk Type</b> to the DCPPI List.
DCPPI List	Contains all of the user-specified <b>Chunk Type</b>
Remove from list button	Deletes DCPPI <b>Chunk Type</b> from the DCPPI List field.

TABLE 81: ADD DCPPI FILTER SCREEN FIELDS

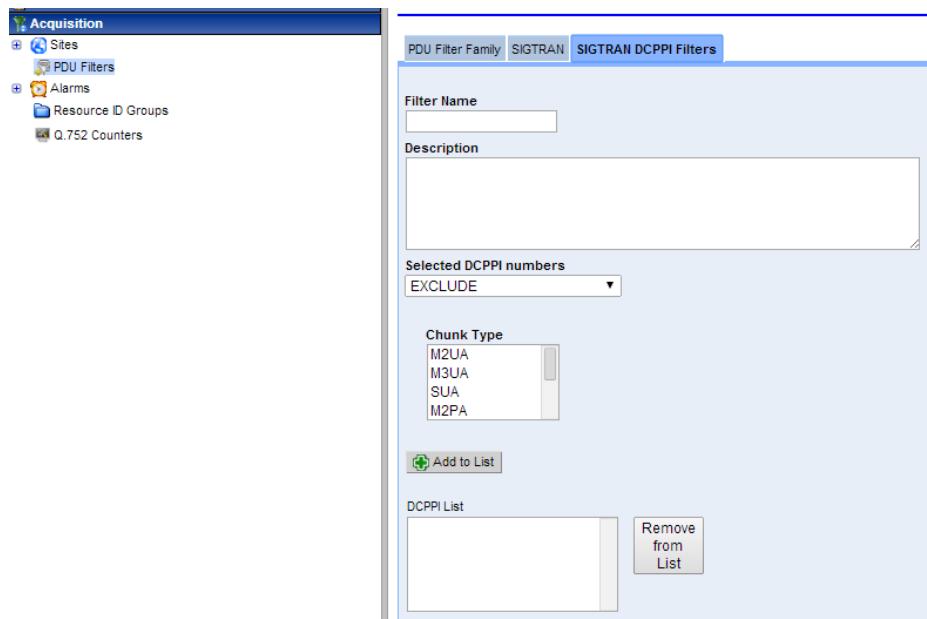


Figure 122: Sigtran Data Chunk Payload Protocol Identifier Filters Screen

6. Enter in the **Filter Name**.
7. (Optional) Enter a **Description**.
8. Select the **DCPPI numbers**
9. Click **Add to List**
10. Click **Finish** to accept the values.

#### Modifying a SigTran Data Chunk Payload Protocol Identifier Filter

Complete these steps to modify a SigTran Data Chunk Payload Protocol Identifier Filter:

5. Select the **SigTran Data Chunk Payload Protocol Identifier Filter** that needs modification.
6. Select **Modify**.
7. Modify the **appropriate information**.
8. Click **Modify**.

The *changes* are saved.

#### Deleting a SigTran Data Chunk Payload Protocol Identifier PDU Filter

Complete these steps to delete a SigTran Data Chunk Payload Protocol Identifier Filter:

4. Select the **SigTran Data Chunk Payload Protocol Identifier Filter** to be deleted.
5. Select **Delete** from the menu.
6. Click **OK** at the prompt.

The *filter* is deleted.

#### About SigTran Raw Filter

SigTran Raw filters are used to configure filter using filter string expressions which follow PMIA filter syntax, which is described in [Appendix G: PMIA filter syntax](#).

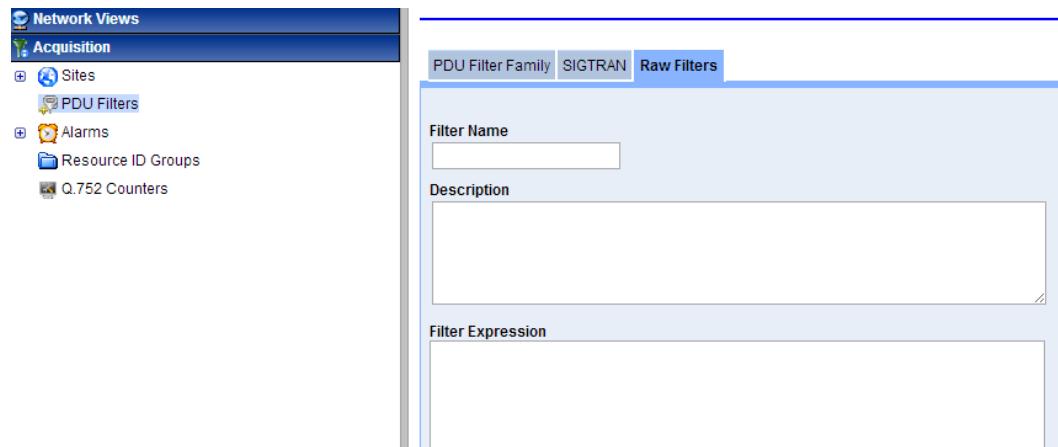


Figure 123: Sigtran Raw Filters Screen

### ***About SigTran Combination Filter***

SigTran Combination filters are literally combinations of the other three types of SigTran Filters. This type of filter provides greater flexibility in routing PDUs.

#### **Adding a SigTran Combination PDU Filter**

Complete these steps to add a SigTran Combination Filter:

**Note:** The maximum size of any filter is 4000 bytes. If the Filter exceeds this constraint, an error message appears stating that the filter has exceeded the size limit.

1. Select **Acquisition > PDU Filters** from the object menu.  
The *PDU Filters* screen opens.
2. Click **Add** from the tool bar.  
The *PDU Filter Family* screen opens.
3. Click **Next**.  
The *SigTran* screen opens.
4. Select *SigTran Combination Filter*  
The *Combination Filters* screen opens.

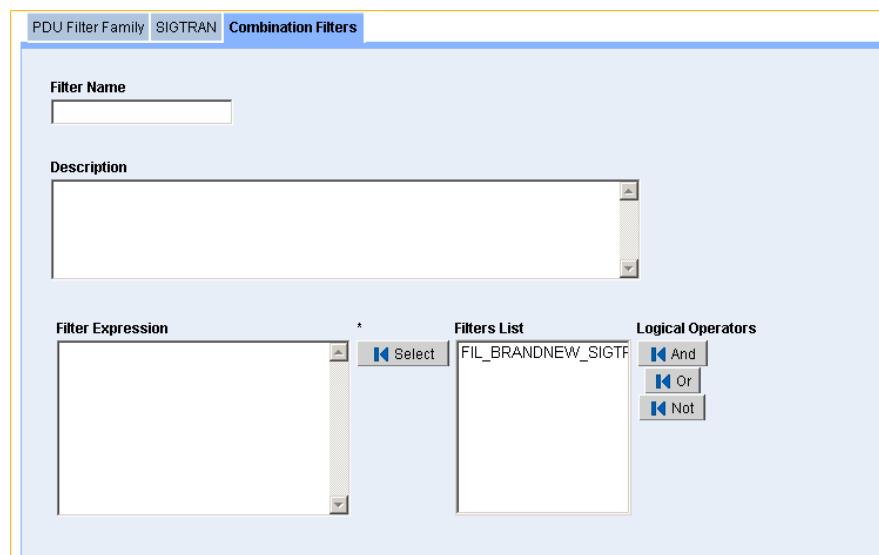


Figure 124: Combination Filters Screen

The table describes the fields on this screen.

Field	Description
Filter Name	User-defined name for filter.
Filter Description	Enter pertinent information for the combination filter.
Filter Expression	Provides a view of the combination filter value as it is created. Selected filters and logical operators appear in this window. When the Accept button is clicked, the information in the Filter Expression window becomes the new Combination filter.
Filter List	List of existing filters a user can combine.
Select button	Moves highlighted filter into Filter Expression box.
And button	Data must match all filters tied together with this operation.
Or button	Data can match both or any one of the filters tied together by this operation.
Not button	Data must match the first filter, but cannot match the second filter tied together by this operation.
Finish button (not shown)	Saves the information to the system.

TABLE 82: COMBINATION FILTER SCREEN FIELDS

5. Type in the **Filter Name**.
6. (Optional) Type in a **Description** of the Filter.
7. Type in or select a **Filter Expression** in the *Filter Expression field*.
8. Click **Select**.  
The *expression* is added to the Filters List.
9. Select a **Logical Operator (And, Or, Not)**, by clicking the appropriate *Operator*.  
From the *pull-down* menu.
10. Click **Done**.  
The *Combination Filter* is added to the object tree in alphanumerical order.

#### Modifying a SigTran Combination PDU Filter

Complete these steps to modify a SigTran Combination Filter:

1. Select the **SigTran Combination Filter** that needs modification.
2. Select **Modify**.
3. Modify the **appropriate information**.
4. Click **Modify**.  
The changes are saved.

#### Deleting a SigTran Combination PDU Filter

Complete these steps to delete a SigTran Combination Filter:

1. Select the **SigTran Combination Filter** to be deleted.
2. Select **Delete** from the menu.
3. Click **OK** at the prompt.  
The filter is deleted.

## About PDU Dataflows

PDU Data Flows are used to group Linksets and/or Associations that are being captured on the IMF/PMF and deliver them to the IXP for protocol analysis and storage. The MSUs/PDUs are packaged and shipped to the IXP over an input stream (IP Stream). Once configured, the PDU Data Flows can be used by the IXP for processing xDR storage.

PDU dataflows are created for each specific xMF (IMF or PMF) subsystem to route both filtered and unfiltered data to IXP for xDR creation. The PDU dataflows contain linksets which can belong to different servers across a subsystem or all together different subsystems. There are different categories of PDU dataflows defined to route different types of data.

CCM provides the capability to configure PDU Dataflows for each xMF subsystem. The capability allows for greater flexibility and quicker search capabilities when creating dataflows.

The following PDU dataflows can be configured in a subsystem:

- GPRS dataflows (for PMF only)
- SS7 MSU dataflows (Including BICC monitoring over SigTran and L2 LSSU)
- IP dataflows
- Q.752 dataflows

**Note:** In an IMF subsystem there is a hard-coded limit of 20 input streams a dataflow can be routed per server.

### Adding a GPRS Gb Dataflow

Complete these steps to add an GPRS data flow for a PMF subsystem.

1. Select **Acquisition > Sites > Subsystem >PDU Data Flows > GPRS > Add.**
2. Type in the **Name** of the *Gb dataflow*.
3. (Optional) Type in a **description** of the dataflow record.
4. Click **Next**.
5. Select a **Gb Filter** from the *drop-down* menu.
6. Enter the **Number** for packet truncation.
7. Click **Next**.
8. Click the **Gb Link** icon.
9. Enter the **Gb Link Name**.
10. Click **Apply Filter**.
11. Select **Gb Link Record** from the list.
12. Click **Select**.
13. Click **Close**.
14. Click **Add**.

The *GPRS dataflow* is added to the system.

**Note:** For the changes to take effect, right-click on the PMF subsystem and select **Apply Changes** from the menu.

### Modifying a GPRS Gb Dataflow

Complete these steps to modify a GPRS Gb Dataflow:

1. Select the **GPRS Gb Dataflow Record** to be modified.
2. Click **Modify**.  
The Modify screen opens.
3. Make the **necessary modifications**.
4. Click **Modify**.  
The *changes* are saved.

### Deleting a GPRS Gb Dataflow

Complete these steps to delete an GPRS Gb Dataflow:

1. Select the **GPRS Gb Dataflow Record** to be deleted.
2. Click **Delete**.
3. Click **OK** at the prompt.  
The *record* is deleted.

### Adding a SS7 Dataflow

Complete these steps to create a SS7 PDU dataflow.

1. Select **Acquisition > Site > Subsystem > PDU Data Flows > SS7**.  
The Add SS7 dataflow list screen opens.

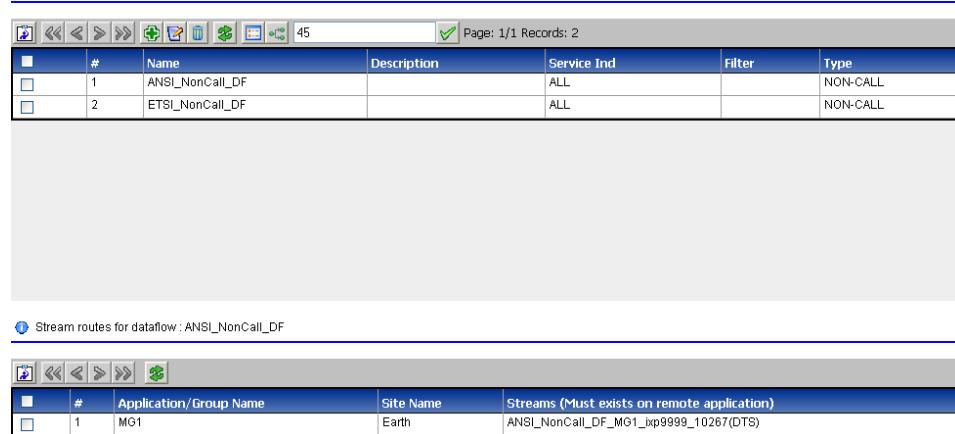


Figure 125: SS7 Dataflow List Screen

2. Click Add on the tool bar.
3. Type in the Name of the SS7 dataflow.
4. (Optional) Type in a Description of the dataflow record.
5. Click Next.

#### Direction, Service Indicator, Filter, & Truncation Details of SS7 Dataflow

Direction Type	CALL
Direction	TX
Service Indicator	ALL
SS7 Filters	None
Packet Truncation	0

Figure 126: Direction, Service Indicator, Filter & Truncation Details Screen

The table describes the default fields on this screen.

**Note:** For LSSU support (selecting the Non-Call), the screen has only three fields with the following choices:

- Direction Type - Non-Call
- Direction - TX, RX or BOTH
- Service Indicator - ALL

Field	Description
Direction Type	Drop-down menu has the following options: <ul style="list-style-type: none"> <li>• CALL or MSUCALL: For certain SCCP, TUP, or ISUP Service Indicator Message Types. Direction for this Direction Type can be only either RX or TX.</li> <li>• MSU: All other MSU data types including BICC over SigTran. Call direction can be RX, TX or Both</li> <li>• Non_Call: (For LSSU support.) The Direction for this message type can be RX, TX or Both. The service indicator will always be "ALL"</li> </ul>
Direction	What is the source of the dataflow Either RX, TX, or Both (MSU and LSSU)
Service Indicator	Drop-down menu of supported SS7 types <b>Note:</b> For LSSU support ALL is the only selection
SS7 Filters	Select the filters to be associated with the dataflow.
Packet Truncation	Enter an integer for the maximum length, in bytes, for each PDU. The range is between 0-4000.
Cancel / Previous	Click on one of the following:

Field	Description
/Next	<ul style="list-style-type: none"> <li>Cancel: Information is not saved.</li> <li>Previous: Returns you to the SS7 Dataflow Information screen.</li> <li>Next: The Monitored Linksets Details screen opens.</li> </ul>

TABLE 83: DIRECTION, SERVICE INDICATOR, FILTER&amp;TRUNCATION DETAILS OF SS7 DATAFLOW SCREEN FIELDS

6. Select the **Direction Type**. (MSU, Call, or NON\_CALL).
7. Select the **Direction**. (Both, Rx, Tx)
8. Select the **Service Indicator**. (For Non\_Call only ALL is available).
9. Select a **SS7 Filter**.
10. Enter the **Length of the PDU** in the *Packet Truncation* field. (Integer between 0-4000)
11. Click **Next**.

The Monitored Linkset Details screen opens.



Figure 127: Monitored Linkset Details Screen

12. Click the **Linksets** icon to show the existing linksets.

You can also create linksets if you need to.

13. Click **Add** to add the record to the database.

SS7 Linkset Selector Filter opens.

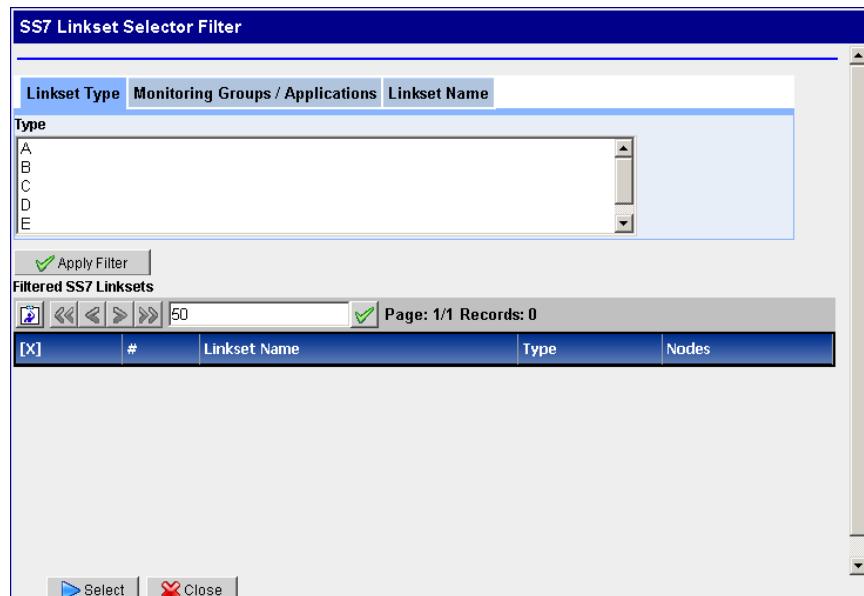


Figure 128: SS7 Linkset Selector Filter Screen

14. Select the **Linkset Type** (A-F) from the Linkset Type tab.
15. (Optional) Select an **option** from the Monitoring Group/Applications tab.
16. Select the **Linkset Name** tab and enter a **Linkset Name**.
17. Click **Apply Filter** to apply the filter you created.
18. Select a **Filtered Linkset** from the list at the bottom table.
19. Select the **Monitored Linkset**.
20. Click **Add**.

**Note:** For the changes to take effect, right-click on the IMF Subsystem and select **Apply Changes** from the menu.

### Managing MFP Streams to Third Party Applications

PDU Dataflows can be linked to ICP or third party applications. Complete these steps create a Stream from a PDU Dataflow:

1. Click **Manage MFP Routes** (to an ICP or third party application) to add the routes to a Dataflow.

The screenshot shows the 'Dataflows And Stream Routes-New Routes' interface. At the top, a message says 'SS7 MSU dataflow created successfully ...'. Below is a table for 'Dataflows' with columns: Name, Description, Service Ind, Filter, and Actions. It lists three rows: 'MTP2\_EARTHA\_NEON\_ANSI' (Service Ind: ISUP, Filter: K\_AUTORID), 'Sample\_MSU\_Dataflow' (Description: 'This is an example of an MSU dataflow', Service Ind: ALL, Filter: K\_AUTORID), and 'df1' (Service Ind: ALL, Filter: K\_AUTORID). Below this is another table for 'Stream routes for dataflow: Sample\_MSU\_Dataflow' with columns: Application/Group Name, Site Name, Streams, and Actions. It lists three rows: 'group1' (Site Name: saturn, Streams: 1), 'group2' (Site Name: saturn, Streams: 1), and 'One' (Site Name: EarthA, Streams: 1).

Figure 129: Dataflows And Stream Routes-New Routes

2. Click **Manage MFP Routes** (in Actions column of routes table) to add new streams. The add *Route* screen opens.

The screenshot shows the 'Select Streams to route dataflow' dialog box. It has two main sections: 'Available Streams:' on the left and 'Selected Streams:' on the right. The 'Available Streams:' list includes: dts10, dts11, dts3, dts4, dts5, and q7522. The 'Selected Streams:' list contains 'Input\_ISUP'. At the bottom are 'Apply' and 'Cancel' buttons.

Figure 130: Dataflows And Stream Routes-Streams Screen

3. Select the **Available Routes** for the Dataflow.
4. Click the **Right Arrow**.
5. Click **Apply**.

The *Stream* is added to the Dataflow.

The screenshot shows the 'Dataflows and Routes Screen'. It displays two tables. The top table is for 'Dataflows' with columns: Name, Description, Service Ind, Filter, and Actions. It lists the same three dataflows as in Figure 129. The bottom table is for 'Stream routes for dataflow: Sample\_MSU\_Dataflow' with columns: Application/Group Name, Site Name, Streams, and Actions. It shows the 'group1' and 'group2' entries from Figure 129, plus a new entry 'Input\_ISUP(DTS)' under 'Streams' for 'One'.

Figure 131: Dataflows and Routes Screen

## Modifying a SS7 Dataflow

Complete these steps to modify an SS7 Dataflow:

1. Select the **SS7 Dataflow Record** to be modified.
2. Click **Modify**.  
The *Modify* screen opens.
3. Make the **necessary modifications**.
4. Click **Modify**.  
The *changes* are saved.

## Deleting a SS7 Dataflow

Complete these steps to delete an SS7 dataflow

1. Select the **SS7 Dataflow Record** to be deleted.
2. Click **Delete**.
3. Click **OK** at the prompt.  
The *record* is deleted.

## About IP Dataflows

### PMF

When you create an IP Dataflow, you select one or more Ethernet devices connected to a selected PMF server. When an Ethernet device, referred to as an IP device in the user interface, is assigned to a dataflow, the Dataflow will forward all IP traffic related to the selected Ethernet device to the IXP upon Dataflow creation. If you wish to limit the IP traffic that is sent to the IXP, you must define and assign a filter to your Dataflow Filters.

### IMF

When you create an IP dataflow in IMF, you can utilize fastcopy to select one or more Ethernet devices connected to a selected IMF server. When an Ethernet device, referred to as an IP device in the user interface, is assigned to a dataflow, the dataflow will forward all IP traffic related to the selected Ethernet device to the IXP upon dataflow creation. If you wish to limit the IP traffic that is sent to the IXP, you must define and assign a filter to your dataflow filters.

You can use these options to send information about the direction of IP traffic to the IXP. To do this you must select the Way Management option and enter the specific network and/or host address(es) you want the directional information for. When this option is used, the data sent to the IXP will indicate whether the IP address is the source, Tx, or the destination, Rx, address in the IP packets.

**Note:** Way Management only provides directional information for IP addresses added to the IP address list. IP traffic data for unspecified IP addresses associated with the selected Ethernet device(s) will still be forwarded to the IXP without the directional information.

XOR is a mechanism for load distribution of the messages to different ICPs and IXPs. The groups can comprise of exactly 2, 4, or 8 IXPs, hence XOR\_2, XOR\_4, and XOR\_8. A dataflow with XOR\_4 needs to be routed to destinations on the routing screen. Selecting any more or less than 4 would cause an error.

XOR preserves the call context. All messages belonging to one call are always forwarded to the same destination in order for correlation to be successful.

XOR allows a Dataflow with higher throughput of traffic to be load shared to a group of IXPs.

**Note:** To create an IP data flow, IP filters have to be already defined and the link-based Network Views used for specifying the IP source has also to be defined.

## Adding an IP Dataflow Using PMF

Complete these steps to create an IP data flow:

1. Select **Acquisition >Site > PDU Data Flows > IP**.  
The IP Dataflow list screen opens.

				
	#	Name	Description	Type

Figure 132: IP Dataflow List Screen

2. Click **Add**.  
The *Add* screen opens.

The screenshot shows a user interface for adding an IP Data Flow. At the top, there is a header labeled 'IPDataFlow Info'. Below the header are two input fields: 'Name' (a simple text input box) and 'Description' (a larger text area with scroll bars). The 'Description' field is currently empty.

Figure 133: IP Data Flow Add Screen

3. Type in the **Name of the IP Dataflow**
4. (Optional) Type in a **Description** of the dataflow record.
5. Click **Next** to move to the IP Data Flow Load Share Configuration screen.

Section	Field	Description
Load Sharing	Is a set of fields where you can set number of destinations and utilize either GTP user plane, GTP control plane or both for load sharing.	
	Load Sharing Across "N" destinations	Pull-down field (0, 2-8) <ul style="list-style-type: none"> <li>• 0 is default and no load sharing is available.</li> <li>• 2 or greater enables you to load share.</li> </ul>
	Utilize GTP User Plane For Load Share Algorithm	Check box - must have minimum of two destinations for load sharing
	Send GTP Control Plane To All Load Share Destinations	Check box - must have a minimum of two destination for load sharing
Send Traffic Classification Counters Only		Check box to select if only counters are used. Use this when not load sharing.
Enter IP Address for Way Management		Allows you to define a list of IP addresses you want directional information for. When selected, IP packet data forwarded to an IXP will include information about the direction of the packet in relation to IP addresses defined in the Ip List. If this is not selected, IP address directional information is not be included in the information sent to the IXP. <ul style="list-style-type: none"> <li>• Host-Address: Point-to-point. For example, 10.25.130.22</li> <li>• Network-Address: Monitors whole network. For example, entering 10.254.100.32/27 includes all IP addresses between 10.254.100.32 - 10.254.100.63.</li> </ul>
Add to list button		When clicked, adds value in Ip Address field to the Ip List field.
IP Address List		Shows the IP addresses subject to Way Management for this dataflow. You can add to or remove IP addresses from this list. If Way Management is not selected, then this field is irrelevant to the dataflow.
Remove from list button		Deletes IP addresses from the Ip List field. When an IP address is deleted from the IP List, it is no longer subject to Way Management.
Reset / Cancel Previous / Next		Click on one of the following: <ul style="list-style-type: none"> <li>• Reset: Restores original settings.</li> <li>• Cancel: Information is not saved.</li> </ul>

Section	Field	Description
		<ul style="list-style-type: none"> <li>• Previous: Returns you to the Add IP Dataflows screen.</li> <li>• Next: The Add IP Dataflows Network View screen opens.</li> </ul>

TABLE 84: ADD/MODIFY IP DATAFLOW SCREEN FIELDS

6. (Optional for Load Sharing) Select the **Number of Destinations** that will be used in load sharing (must be two or more).
7. (Optional) Select whether the system should utilize the **GTP User Plane** for loadsharing. action.
8. (Optional) Select (or not) whether the system should utilized the **GTP Control Plane** to all shared destinations.
9. Type in a valid **IP Address(es)**.
10. Click **Add**. The IP address is added to the IP Address list.
11. Click **Next** to move to the IP Data Flow Truncation Configuration screen.
12. Enter a **Packet Truncation Value** (integer).
13. (Optional) Select any **Annotations** you want to be associated with the dataflow.
14. Click **Next** to move to the IP Data Flow Stream Configuration screen.

The *Traffic Classifications* screen opens.

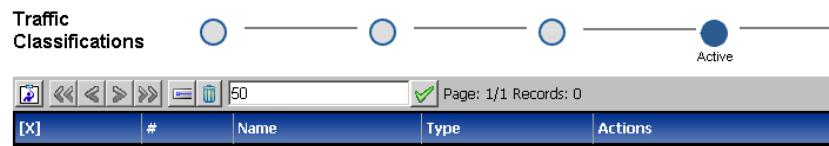


Figure 134: Traffic Classifications Screen

15. Click **Select Traffic Classifications** on the tool bar.

The *Traffic Classification Selector* screen opens.

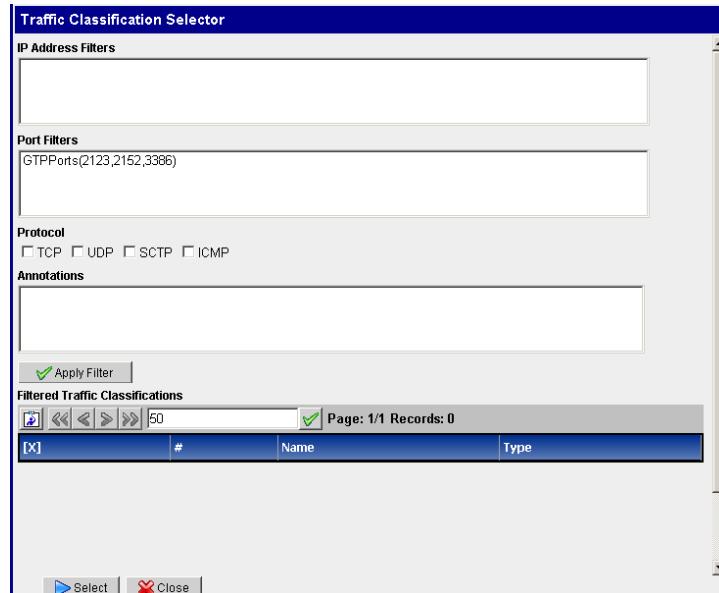


Figure 135: Traffic Classifications Selector Screen

16. Select either an **IP Address Filter** or a **Port Filter**.

17. Select a **Protocol**.

18. Select an **Annotation**.

19. Click **Apply Filter**.

The *Filter* appears in the bottom table.

20. Click **Select**.

The *Traffic Classification* is added to the dataflow.

21. Click **Add**.  
The *IP Dataflow* is added to the system.
22. You must now **Apply Changes** for the changes to take effect in the subsystem.

### Adding an IP Dataflow Using IMF FastCopy

Complete these steps to create an IP dataflow using IMF FastCopy.

1. Select **Acquisition >IMF Site > PDU Data Flows > IP**.  
The *IP Dataflow* list screen opens.




Figure 136: IP Dataflow List Screen

2. Click **Add**.  
The *Add* screen opens.

Figure 137: IP Data Flow Add Screen

3. Type in the **Name of the IP Dataflow**
4. (Optional) Type in a **Description** of the dataflow record.
5. Click **Next**.

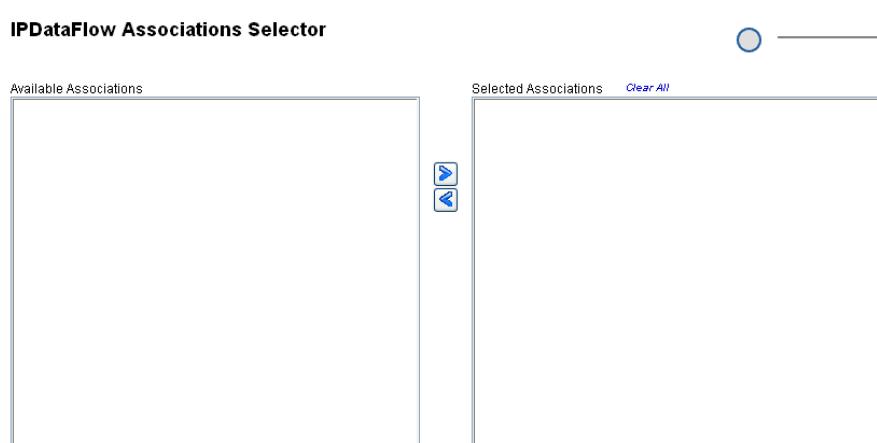


Figure 138: IP Dataflow Associations Selector Screen

6. Select one or more **Available Associations**.
7. Click the **Right Arrow** to place them into the *Selected Associations* Field.
8. Click **Add**.

**Note:** For the changes to take effect, right-click on the IMF subsystem and select **Apply Changes** from the menu.

### Modifying an IP Dataflow

Complete these steps to modify an IP Dataflow:

1. Select the **IP Dataflow Record** to be modified.

2. Click **Modify**.  
The *Modify* screen opens.
3. Make the **necessary modifications**.
4. Click **Modify**.  
The *changes* are saved.
5. You must now **Synchronize** the subsystem.

## Deleting an IP Dataflow

Complete these steps to delete an IP Dataflow:

**Note:** You must de-select any IP stream that is associated with an IP dataflow before deleting it.

1. Select the **IP Dataflow Record** to be deleted.
2. Click **Routes**.  
The bottom table changes to show the *Input streams* for the dataflow.
3. Click **Streams**.  
The *streams selection* screen opens.
4. **De-select** all the selected streams.
5. Click **Apply**.
6. Click **Delete** on the selected dataflow.
7. Click **OK** at the prompt.  
The *record* is deleted.
8. You must now **Synchronize** the subsystem.

## About SS7 Q.752 Dataflows

This dataflow is used to monitor Q.752 data, which can be sent to an IXP. A Q.752 dataflow definition consists of a dataflow name and a description.

### *Adding an SS7 Q.752 Dataflow*

Complete these steps to create a Q.752 Dataflow:

1. Select **Acquisition > PDU Data Flows > Q.752 Dataflows**.
2. Right-Click and select **Add**.  
The *Add Q.752 Dataflow* screen opens.

Figure 139: Add Q.752 Dataflow Screen

3. Type in the **Name of the MSU Dataflow**.
4. (Optional) Type in a **Description** of the dataflow record.

5. Click **Next**.

The *Q.752 Dataflow View Details* screen opens.

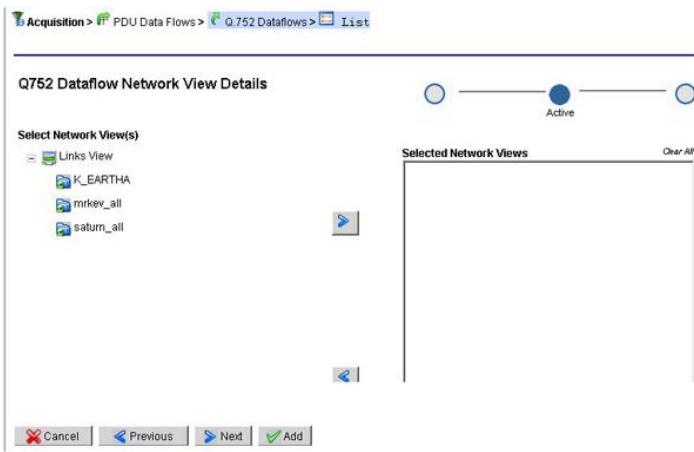


Figure 140: Network View Details Of Q.752 Record Screen

6. Expand the **Network Views Icon** to show the existing views.

7. Select the **View(s)** you want associated with the dataflow.

8. Click the **right arrow** to send the selected view to the selection field.

9. Click **Add** to add the record to the database.

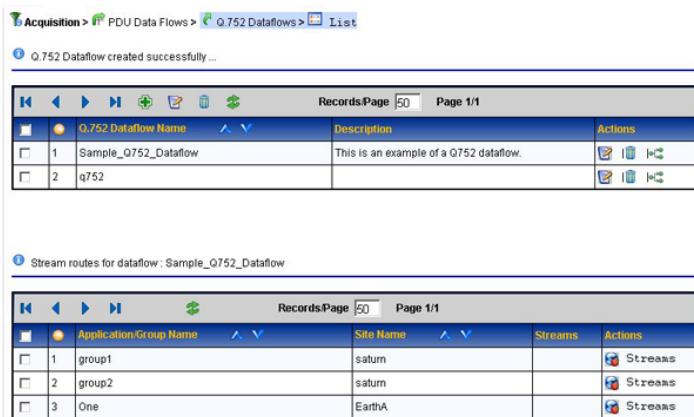


Figure 141: Dataflow Summary Screen

10. Select the **Dataflow** that was added.

11. Click **Routes** (far right icon in Actions column) to add the routes to the dataflow shown above.

12. Select the **Dataflow Route** (bottom table) that will have the streams.

13. Click **Route Streams** (in Actions column of routes table) to add new streams.

The *Add Streams* screen opens.

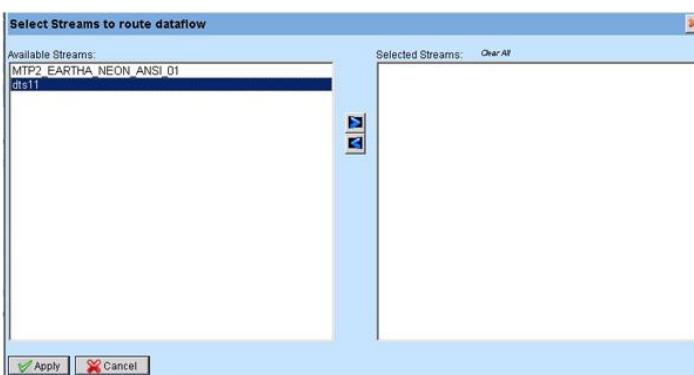


Figure 142: Dataflows And Stream Routes-Streams Screen

14. Select the **Available Streams** for the dataflow.
15. Click the **Right Arrow**.
16. Click **Apply**.

The *stream* is added to the dataflow.

The screenshot shows two tables. The top table, titled 'Q.752 Dataflows', has columns for 'Q.752 Dataflow Name', 'Description', and 'Actions'. It contains two entries: 'Sample\_Q752\_Dataflow' (Description: 'This is an example of a Q752 dataflow.') and 'q752'. The bottom table, titled 'Stream routes for dataflow: Sample\_Q752\_Dataflow', has columns for 'Application/Group Name', 'Site Name', 'Streams', and 'Actions'. It contains three entries: 'group1' (Site Name: 'saturn'), 'group2' (Site Name: 'saturn'), and 'One' (Site Name: 'EarthA', Streams: 'ds11(DTS)'). A callout line points to the 'Streams' column in the bottom table.

Figure 143: Dataflows And Stream Routes Streams Screen

17. You must now synchronize the subsystem.

#### **Modifying an SS7 Q.752 Dataflow**

Complete these steps to modify an SS7 Q.752 Dataflow:

1. Select the **SS7 Q.752 Dataflow Record** to be modified.
2. Click **Modify**.  
The *Modify* screen opens.
3. Make the **necessary modifications**.
4. Click **Modify**.  
The *changes* are saved.
5. Click **OK** at the prompt.  
The *record* is deleted.
6. You must now **Synchronize** the subsystem.

#### **Deleting an SS7 Q.752 Dataflow**

**Note:** You must de-select any IP stream that is associated with an IP dataflow before deleting it.

1. Select the **Q.752 Dataflow Record** to be deleted.
2. Click **Routes**.  
The bottom table changes to show the Input streams for the dataflow.
3. Click **Streams**.  
The *streams* selection screen opens.
4. De-select all the **Selected Streams**.
5. Click **Apply**.
6. Click **Delete** on the selected dataflow.
7. Click **OK** at the prompt.  
The record is deleted.
8. You must now **Synchronize** the subsystem.

## **About Alarms**

Various types of alarm-related parameters are managed through CCM. Alarm management includes enabling/disabling alarms, setting threshold levels as well as other functions. The PIC system receives alarms from the monitored network as well as the various applications generate alarms based on

PDUs received, traffic condition, etc. In addition, users can configure ProTraq statistical sessions and set alarm thresholds. This release of CCM supports the management of alarms that are either received by or generated by the Next-Gen IMF or PMF subsystems. This release of CCM supports these operations at a global level. For example, if the user enables or disables a particular type of alarm, the action takes effect for all sites. By default all the alarms are enabled. You have to explicitly disable alarms.

## About SS7 OAM Alarms

This section describes how to use CCM to enable and disable Eagle OAM alarms. The Eagle STP reports alarms to an IMF subsystem. The IMF subsystem forwards these alarms to *ProAlarm* application. The user can enable or disable forwarding of such alarms globally. For a listing of OAM alarms, see *ProAlarm Configuration User Guide*.

### **Enabling and Disabling SS7 OAM Alarms**

Complete these steps to enable or disable Eagle OAM alarms:

1. Select **Acquisition > Alarms > Eagle OAM > List**.


The screen opens showing the list of Eagle OAM alarms shown below.

#	Alarm Number	Description	Enable
1	2016	STC card is out of service.	<input checked="" type="checkbox"/>
2	2017	STC card is in service.	<input checked="" type="checkbox"/>
3	2018	The Network for STC card is inaccessible.	<input checked="" type="checkbox"/>

**Figure 144: Alarms Configuration Screen**

2. Select the **Alarm** to be enabled or disabled.
3. Click **Modify**.

The Modify Eagle OAM Alarm Configuration screen opens with the alarm record details shown below.




#### **Alarm Number**

2083

#### **Name**

A craft person at the far end has  
remotely inhibited Eagle link.

#### **Enable**



**Figure 145: Modify Eagle OAM Alarm Configuration Screen**

4. **Enable or Disable** the alarm.
  - Enable** - select the Enable check box.
  - Disable** - click on the Enable check box to remove check mark.
5. Click **Done**.

The modifications are saved and you are returned to the alarm list.

**Note:** To update the alarm list, click the **Refresh** button on the toolbar. The list is updated to show the latest changes.

## Managing SLOR Thresholds

This section describes how the Q.752 alarms parameters are set by the CCM application. The IMF and PMF servers examine the received PDUs and count types of events. You can set threshold values for these counts. When the count exceeds or falls below the specified level, an alarm is generated.

There are three levels of SLOR alarms:

- High - Default threshold is 40 %
- Low - Default threshold is 20%
- Hold - Default threshold is 5%


**Note:** The thresholds are set for all IMF across subsystems. You cannot have different thresholds for different subsystems.

**Note:** It is recommended that a lower SLOR threshold should not be set above a higher threshold. For example, the threshold for a Low SLOR set at 50% while the High SLOR threshold being set to 40%.

### Setting Signaling Link Occupancy Counter (SLOR) Thresholds

Complete these steps to modify a SLOR threshold:

1. Select **Acquisition > Alarms > SLOR Threshold > List**.  
The *SLOR threshold configuration* screen opens shown below.

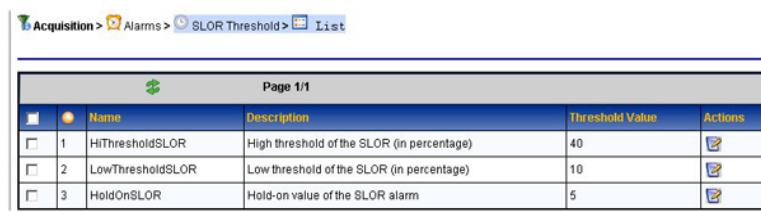


	Name	Description	Threshold Value	Actions
<input type="checkbox"/>	1 HiThresholdSLOR	High threshold of the SLOR (in percentage)	40	
<input type="checkbox"/>	2 LowThresholdSLOR	Low threshold of the SLOR (in percentage)	10	
<input type="checkbox"/>	3 HoldOnSLOR	Hold-on value of the SLOR alarm	5	

Figure 146: Slor Threshold List

2. Select the **Alarm** to be modified.

3. Click **Modify**.

The *Modify SLOR Threshold Configuration* screen opens with the alarm record details shown below.

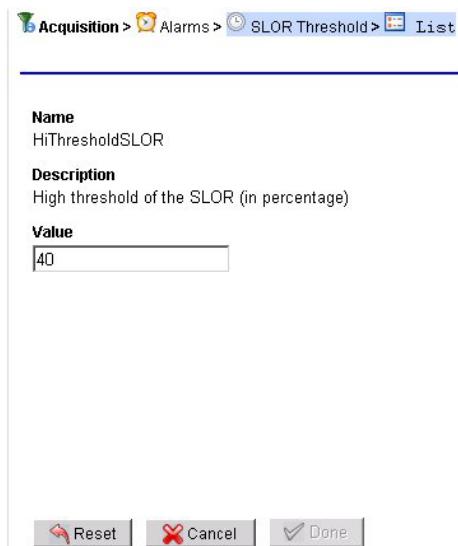

**Name**  
HiThresholdSLOR

**Description**  
High threshold of the SLOR (in percentage)

**Value**  
40



  

Figure 147: Modify SLOR Threshold Configuration Screen

4. Type in the new **Value** for the threshold.

5. Click **Done**.

The *modifications* are saved and you are returned to the alarm list.

**Note:** To update the alarm list, click the **Refresh** button on the toolbar. The list is updated to show the latest changes.

## Managing Q.752 Alarms


This section describes how the Q.752 alarms are enabled or disabled by the CCM application. The IMF/PMF system can raise or clear alarms based on the counter thresholds. If an alarm condition is detected, it reports them to the IMF/PMF system. The IMF/PMF subsystem forwards these alarms to *ProAlarm* application. You can enable or disable forwarding of such alarms globally. For a listing of Q.752 alarms, see *ProAlarm Configuration User Guide*.

### Enabling and Disabling Q.752 Alarms

Complete these steps to enable or disable a Q.752 alarm:

1. Select **Acquisition > Alarms > Q.752/SS7 > List**.

The *Q.752/SS7 Alarms Configuration* screen opens.

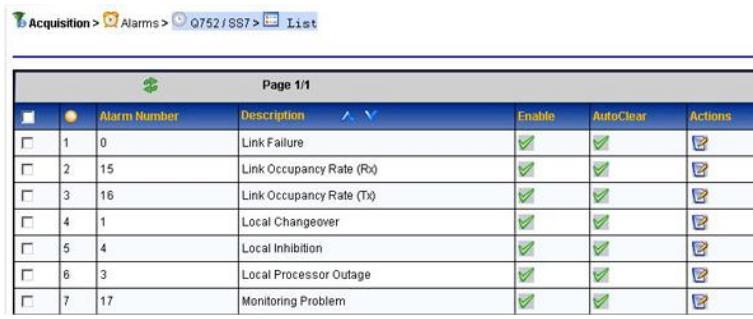


	Alarm Number	Description	Enable	AutoClear	Actions
<input type="checkbox"/>	1	Link Failure	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
<input type="checkbox"/>	2	Link Occupancy Rate (Rx)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
<input type="checkbox"/>	3	Link Occupancy Rate (Tx)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
<input type="checkbox"/>	4	Local Changeover	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
<input type="checkbox"/>	5	Local Inhibition	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
<input type="checkbox"/>	6	Local Processor Outage	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
<input type="checkbox"/>	7	Monitoring Problem	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

Figure 148: Q752/SS7 Alarms Configuration Screen

2. Select the **Alarm** to be enabled or disabled.

3. Click **Actions Icon** (modify) the *Modify Platform Alarm Configuration* screen opens with the alarm record details.

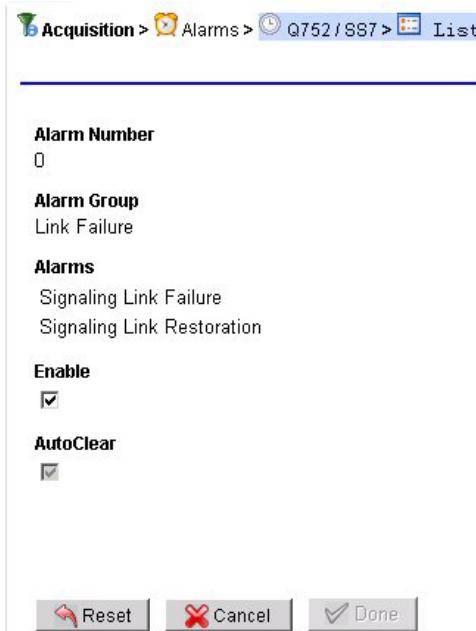

**Alarm Number**  
0

**Alarm Group**  
Link Failure

**Alarms**  
Signaling Link Failure  
Signaling Link Restoration

**Enable**

**AutoClear**


  

Figure 149: Modify Platform Alarm Configuration Screen

**4. Enable or Disable the alarm.**

- Enable** - select the Enable check box.
- Disable** - click on the Enable check box to remove check mark.

**5. Select or de-select AutoClear function.****6. Click Done.**

The *modifications* are saved and you are returned to the alarm list.

**Note:** To update the alarm list, click the Refresh button on the toolbar. The list is updated to show the latest changes.

## About Resource ID Groups (RID)

Resource ID Groups (RID Groups) are used to create SS7 and Sigtran linksets. You manage Resource ID Groups using the Acquisition perspective.

### About Auto RID

Auto RID provides two automatically configured RID groups: one for 'AUTO RID' with a value of 65535 and another for 'AUTO RID REVERSE' with a value of 65534. The figure below shows the default settings in the Resource ID group list screen. See [About Auto RID](#) for more information.

Page 1/1 Total Records: 2				
	Group Name	Resource ID Group	Number of Linksets	Actions
<input type="checkbox"/>	1 RID_EQUALS_TxDpc_Or_RxOPC	AUTO RID	0	
<input type="checkbox"/>	2 RID_EQUALS_TxOPC_Or_RxDPC	AUTO RID REVERSE	0	

Figure 150: Modify Resource ID Group List Screen (Default)

### Creating a Resource ID Group

Complete these steps to create a Resource ID Group:

1. Select **Acquisition > Resource ID Groups**.

The *Resource ID* group list screen opens.

Page 1/1				
	Group Name	Resource ID Group	Number of Linksets	Actions
<input type="checkbox"/>	1 RID_EQUALS_TxDpc_Or_RXOPC	AUTO RID	0	
<input type="checkbox"/>	2 RID_EQUALS_TxOPC_Or_RxDPC	AUTO RID REVERSE	0	
<input type="checkbox"/>	3 RIDgrp1	1	1	
<input type="checkbox"/>	4 Sample_RID	7	1	

Figure 151: Resource ID Group List Screen

2. Click **Add**.

The *Add* screen opens.

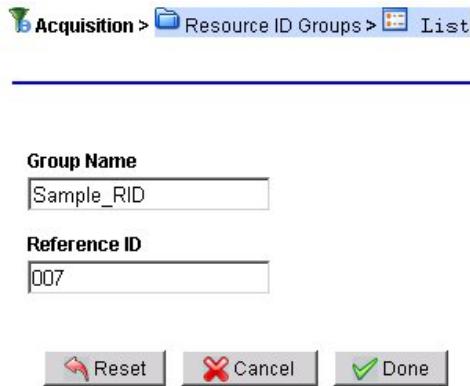


Figure 152: Resource ID Group List Screen

3. Type in the **Group Name**.
4. Type in the **Reference Group** (this must be a number)

**Note:** The Referenced ID must be a number. No symbols or letters are allowed.

5. Click **Done**.  
The *Resource ID Group* is added to the Settings list.

#### ***Modifying a Resource ID Group***

Complete these steps to modify a Resource ID Group:

1. Select the **Resource ID Group** that needs modification from the Object Tree.
2. Select **Modify**.
3. Modify the **appropriate information**.

**Note:** You can only modify the Group Name. To change any other information, you must either add a new group, or delete the existing group and add it again with the new information.

4. Click **Modify**.  
The *changes* are saved.

#### ***Deleting a Resource ID Group***

Complete these steps to delete a Resource ID Group:

**Note:** You cannot delete an RID group if it has linksets assigned to it or if the RID group is pre-defined.

1. Select the **Resource ID Group** to be deleted.
2. Select **Delete** from the menu.
3. Click **OK** at the prompt.  
The *group* is deleted.

## **About Q.752 Counters**

### **Listing Q.752 Counters**

Complete these steps to list a Q.752 counter:

1. Select **Acquisition > Q.752 counters > List**.  
The Q.752 Counters List screen opens shown below.



	Name	Low Threshold	High Threshold	Status	Actions
1	Q.752_1_10_30M	100	500	<input checked="" type="checkbox"/>	
2	Q.752_1_1_30M	20	80	<input checked="" type="checkbox"/>	
3	Q.752_1_7_30M	20	80	<input checked="" type="checkbox"/>	
4	Q.752_2_13_30M	20	80	<input checked="" type="checkbox"/>	
5	Q.752_2_14_30M	20	80	<input checked="" type="checkbox"/>	

Figure 153: Q752 Counters List Screen

- From the list you can **modify** a record(s).


### Modifying a Q.752 counter Record

Complete these steps to modify a Q.752 counter record:

- Select **Acquisition > Q.752 counters > List** to open the **Q.752 Counters List** screen.
- Select the **Counter** to be modified.
- Click **Modify** on the right-hand column.

The *Q.752 Counter Modify Information* screen opens.

**Note:** You can also select the record to be modified by clicking in the left-hand column then click the **Modify** button on the tool bar.

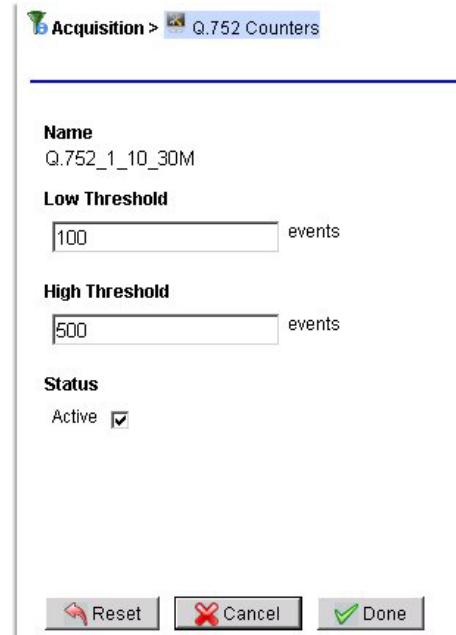

**Name**  
Q.752\_1\_10\_30M

**Low Threshold**  
100 events

**High Threshold**  
500 events

**Status**  
Active


  

Figure 154: Q752 Counter Modify Information Screen

- The only **Fields** you can modify are:
  - Low Threshold** (number)
  - High Threshold** (number)
  - Active** (to activate or de-activate the counter)
- Click **Done** to send the changes to the database.
- You are returned to the List screen.
- Click **Refresh** to view changes.

**Note:** It takes approximately 10 seconds for the changes to be registered by the xMF system.

## About PMF Sigtran configuration use case

### Configuration overview

The main goal of PMF in Sigtran network monitoring is to classify the network traffic to be able to feed the appropriate XDR Builder.

This table describes relation between XDR Builder and PMF Sigtran filters:

XDR Builder	PMF filter
RAN CC 2 CDR	RANAP-M3UA BSSAP-M3UA
RAN CC CDR	RANAP-M3UA BSSAP-M3UA
RAN MM TDR	RANAP-M3UA BSSAP-M3UA
RAN SMS TDR	RANAP-M3UA BSSAP-M3UA
RAN USSD TDR	RANAP-M3UA BSSAP-M3UA
SS7 AIN TDR reconstitution	AIN-SCTP-ANSI or AIN-M3UA-ANSI or AIN-M2PA-ANSI
SS7 BICC ANSI CDR capture	BICC-SCTP or BICC-M3UA or BICC-M2PA
SS7 BICC ANSI CDR reconstitution	BICC-SCTP or BICC-M3UA or BICC-M2PA
SS7 BICC ETSI CDR capture	BICC-SCTP or BICC-M3UA or BICC-M2PA
SS7 BICC ETSI CDR reconstitution	BICC-SCTP or BICC-M3UA or BICC-M2PA
SS7 BSSAP TDR capture	BSSAP-M3UA
SS7 BSSMAP TDR reconstitution	BSSAP-M3UA
SS7 BSSMAP TDR	BSSAP-M3UA
SS7 CLASS TDR capture	AIN-SCTP-ANSI or AIN-M3UA-ANSI or AIN-M2PA-ANSI
SS7 CLASS TDR reconstitution	AIN-SCTP-ANSI or AIN-M3UA-ANSI or AIN-M2PA-ANSI
SS7 INAP Compact TDR	INAP-SCTP-ETSI or INAP-M3UA-ETSI or INAP-M2PA-ETSI or INAP-M2UA-ETSI
SS7 INAP SUDR Accounting	INAP-SCTP-ETSI or INAP-M3UA-ETSI or INAP-M2PA-ETSI or INAP-M2UA-ETSI
SS7 INAP TDR capture	INAP-SCTP-ETSI or INAP-M3UA-ETSI or INAP-M2PA-ETSI or INAP-M2UA-ETSI
SS7 INAP TDR reconstitution	INAP-SCTP-ETSI or INAP-M3UA-ETSI or INAP-M2PA-ETSI or INAP-M2UA-ETSI
SS7 IS41 DE TDR capture	IS41-SCTP-ANSI or IS41-M3UA-ANSI or IS41-M2PA-ANSI
SS7 IS41 DE TDR reconstitution	IS41-SCTP-ANSI or IS41-M3UA-ANSI or IS41-M2PA-ANSI
SS7 IS41 TDR capture	IS41-SCTP-ANSI or IS41-M3UA-ANSI or IS41-M2PA-ANSI
SS7 IS41 TDR reconstitution	IS41-SCTP-ANSI or IS41-M3UA-ANSI or IS41-M2PA-ANSI
SS7 ISUP ANSI CDR capture	ISUP-SCTP or ISUP-M3UA or ISUP-M2PA or ISUP-M2UA
SS7 ISUP ANSI CDR reconstitution	ISUP-SCTP or ISUP-M3UA or ISUP-M2PA or ISUP-M2UA
SS7 ISUP ETSI CDR capture	ISUP-SCTP or ISUP-M3UA or ISUP-M2PA or ISUP-M2UA
SS7 ISUP ETSI CDR reconstitution	ISUP-SCTP or ISUP-M3UA or ISUP-M2PA or ISUP-M2UA
SS7 ISUP ETSI CDR reconstitution multileg	ISUP-SCTP or ISUP-M3UA or ISUP-M2PA or ISUP-M2UA
SS7 ISUP ETSI SUDR Accounting	ISUP-SCTP or ISUP-M3UA or ISUP-M2PA or ISUP-M2UA
SS7 ISUP ETSI SUPER CORRELATION capture	ISUP-SCTP or ISUP-M3UA or ISUP-M2PA or ISUP-M2UA
SS7 ISUP ETSI SUPER CORRELATION reconstitution	ISUP-SCTP or ISUP-M3UA or ISUP-M2PA or ISUP-M2UA
SS7 L2L3 ANSI SUDR	MNG-SCTP or MNG-M2PA or MNG-M3UA or MNG-M2UA
SS7 L2L3 ETSI SUDR	MNG-SCTP or MNG-M2PA or MNG-M3UA or MNG-M2UA
SS7 L2L3 STATS SUDR	MNG-SCTP or MNG-M2PA or MNG-M3UA or MNG-M2UA
SS7 Lidb TDR capture	AIN-SCTP-ANSI or AIN-M3UA-ANSI or AIN-M2PA-ANSI
SS7 Lidb TDR reconstitution	AIN-SCTP-ANSI or AIN-M3UA-ANSI or AIN-M2PA-ANSI
SS7 MAP Compact TDR	MAP-SCTP-ETSI or MAP-M3UA-ETSI or MAP-M2PA-ETSI or MAP-M2UA-ETSI
SS7 MAP Multi Leg TDR capture	MAP-SCTP-ETSI or MAP-M3UA-ETSI or MAP-M2PA-ETSI or MAP-M2UA-ETSI
SS7 MAP Multi Leg TDR reconstitution	MAP-SCTP-ETSI or MAP-M3UA-ETSI or MAP-M2PA-ETSI or MAP-M2UA-ETSI
SS7 MAP SM TDR capture	MAP-SCTP-ETSI or MAP-M3UA-ETSI or MAP-M2PA-ETSI or MAP-M2UA-ETSI
SS7 MAP SM TDR reconstitution	MAP-SCTP-ETSI or MAP-M3UA-ETSI or MAP-M2PA-ETSI or MAP-M2UA-ETSI
SS7 MAP SUDR Accounting	MAP-SCTP-ETSI or MAP-M3UA-ETSI or MAP-M2PA-ETSI or MAP-M2UA-ETSI
SS7 MAP TDR capture	MAP-SCTP-ETSI or MAP-M3UA-ETSI or MAP-M2PA-ETSI or MAP-M2UA-ETSI
SS7 MAP TDR reconstitution	MAP-SCTP-ETSI or MAP-M3UA-ETSI or MAP-M2PA-ETSI or MAP-M2UA-ETSI
SS7 MAP Virtual HLR TDR capture	MAP-SCTP-ETSI or MAP-M3UA-ETSI or MAP-M2PA-ETSI or MAP-M2UA-ETSI
SS7 MAP Virtual HLR TDR reconstitution	MAP-SCTP-ETSI or MAP-M3UA-ETSI or MAP-M2PA-ETSI or MAP-M2UA-ETSI
SS7 MAP2 TDR reconstitution	MAP-SCTP-ETSI or MAP-M3UA-ETSI or MAP-M2PA-ETSI or MAP-M2UA-ETSI
SS7 MAP2 TDR reconstitutionCompact	MAP-SCTP-ETSI or MAP-M3UA-ETSI or MAP-M2PA-ETSI or MAP-M2UA-ETSI
SS7 WINServices TDR capture	IS41-SCTP-ANSI or IS41-M3UA-ANSI or IS41-M2PA-ANSI

SS7 WINServices TDR reconstitution	IS41-SCTP-ANSI or IS41-M3UA-ANSI or IS41-M2PA-ANSI
UMTS Iu-C RAB TDR	RANAP-M3UA
UMTS Iu-C TDR	RANAP-M3UA
VoIP H248 TDR capture	H248-SCTP
VoIP H248 TDR Reconstitution By Call	H248-SCTP
VoIP H248 TDR Reconstitution By Transaction	H248-SCTP
VoIP MEGACO TDR capture	H248-SCTP
VoIP MEGACO TDR Reconstitution By Call	H248-SCTP
VoIP MEGACO TDR Reconstitution By Transaction	H248-SCTP

TABLE 85: PMF SIGTRAN FILTERS USAGE

**Remark:** The choice between M3UA and M2PA depends of the Sigtran network interface to monitor.

The figure below describes an overview of the final PMF Sigtran configuration:

- Predifined Protocol filtering at xMF level in order to avoid filtering on IXP and use only one builder per DFP
- In some case Predifined filters might be customized (MAP/INAP SSN for example)
- SS7 DFP Capacity 40M
- CN-AN DFP Capacity 25M
- If the volume of trafic is over the capacity of one DFP loadshare the Traffic using Capacity management qualification information

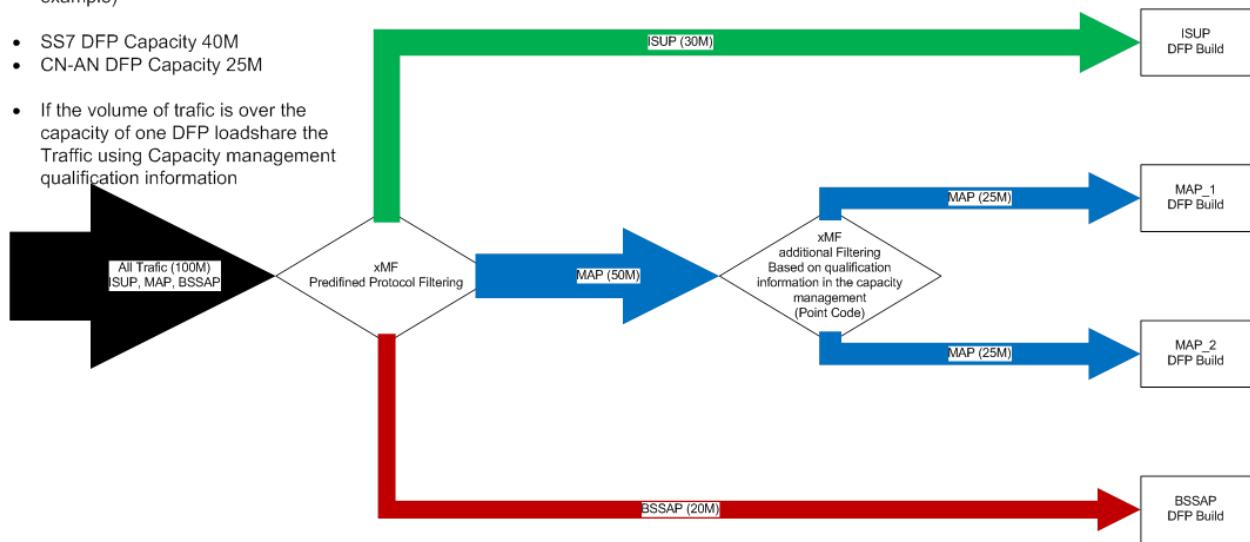


Figure 155: Final PMF Sigtran configuration Overview

## Configuration use case description

### Analysing network traffic

1. Configure the traffic classifications :
  - a. Identify the type of network to monitor: ETSI or ANSI and M2PA or M3UA traffic
  - b. Using "PMF Sigtran Filters Usage" table, identify needed Traffic Classifications and create them using following option – cf. [About Traffic Classifications \(PMF\)](#) :
    - Name: e.g. "MAP", "ISUP", "MNGT", "INAP", "IS41", "AIN"...
    - Transport Protocol: SCTP
    - Forwarding: Chunk
    - Filters: see "PMF Sigtran Filters Usage" table
  - c. Apply the configuration

#	Traffic Classification Name	Description	Internet Protocol	Transport Protocol	Application Layer	Forwarding	Status	Duplicate Suppression	Policy	Annotations	Owner
1	INAP		IPv4	SCTP	All	Chunks	✓	✗			tekelec
2	ISUP		IPv4	SCTP	All	Chunks	✓	✗			tekelec
3	MAP		IPv4	SCTP	All	Chunks	✓	✗			tekelec

2. Monitor and analyse CapacityManagement session records: ideally, let the system running during one full day and analyze the CapacityManagement session to identify the peak of traffic period.

#### ***Create final PMF configuration***

1. Create the Point Code filter rules:

Using CapacityManagement session, extracts Point Code filter rules to limit bandwidth of each Traffic Classification.


2. Create the PDU filters:

Following step must be done for each Point Code filter rules:

- a. In **Acquisition >PDU Filters**, create a new Sigtran Raw Filter and paste your Point Code filter rules – don't forget to add the m3ua/m3uaa/m2pa/m2paa keyword depending of the type of network to monitor:

**E.g. "PC-3-MAP" filter:**  
`m3ua((pc 1142 and pc 1223) or (pc 1142 and pc 1482)  
 or (pc 1142 and pc 10703) or (pc 1142 and pc 10704)  
 or (pc 1142 and pc 10201) or (pc 1142 and pc 1511) ...)`

- b. In **Acquisition >PDU Filters**, create a new Sigtran Combination Filter which combines a Point Code filter AND its PMF Sigtran filter:

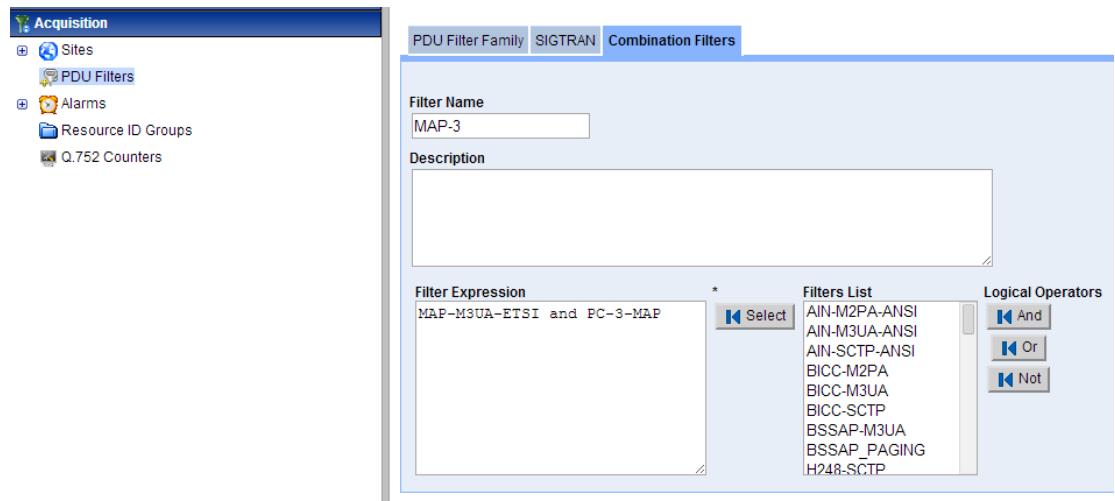

- c. In **Acquisition > Site > Server > Traffic Classification**, create a Traffic Classification which uses this Sigtran Combination Filter using same option as before (Transport Protocol: SCTP and Forwarding: Chunk). This Traffic Classification can be used to send traffic to XDR Builder without overload its bandwidth limitation

## Chapter 9: IXP Mediation

### About Mediation Perspective

The *Mediation Perspective* enables you to manage the IXP, (and Data Warehouse (DWH)), subsystems. The entire configuration in this perspective is designed to configure Dataflow Processings, data sources, input Streams, xDR filters, distributions, platform parameters of xDRs in either a *DWH* or *IXP* subsystem.

### About Managing each IXP Subsystem

The *Mediation Perspective* object tree has the Site object where you can manage IXP subsystems belonging to a particular site. Once you have discovered all the elements of each IXP subsystem, you go to the Mediation perspective to configure the subsystem.

In addition, once the Subsystem is discovered, you can click on the Subsystem in the *Mediation Perspective* to view a platform overview of the system.

DWH Server Name	IP Address			State	
ixp7500-1a_DWH	10.240.23.202			ACTIVE	
Server	Dataflow Processing	Type	Active	Input Stream(s)	Output
ixp7500-1a	Test_Build	Building	✓	Test	Test_BuildIS41DataBrokerTDRreconstitution
	Deepak_S	Building	✓	Test	B_Deepak_5
	Test_Dataflow_Assistant	Building	✓	Test	B_Test_Session_6
	Test_DA1	Building	✓	Test	B_Test_GP_7
	ReTest_DB_Build	Building	✓	Test	ReTest_DB_BuildMAPDataBrokerTDRreconsti
	DFP_Using_Assitant	Building	✓	Test	B_test_session1_11
	StoreDFP	Building	✓	Test	B_session001_12
	ixp7500PoolMonitor_1	Operation	✓	ixp7500PoolMonitor	O_ixp7500PoolMonitor_2 K_ixp7500AggSessionMonitor_3
	DB_Operate	Operation	✓	Test_BuildIS41DataBrokerTDRreconstitution	DB_Operate_operate
	Non_DB_Operate	Operation	✓	B_Deepak_5	Non_DB_Operate_operate
	Test_GP_8	Operation	✓	B_Test_GP_7	K_T_Stats_9
	StreamMonitor	Storage	✓	ixp7500StreamMonitor	ixp7500StreamMonitor
	BuildMonitor	Storage	✓	ixp7500BuildMonitor	ixp7500BuildMonitor
	OperateMonitor	Storage	✓	ixp7500OperateMonitor	ixp7500OperateMonitor
	PoolMonitor	Storage	✓	O_ixp7500PoolMonitor_2	ixp7500PoolMonitor
	BuildThreadMonitor	Storage	✓	ixp7500BuildThreadMonitor	ixp7500BuildThreadMonitor
	S_ixp7500AggSessionMonitor_4	Storage	✓	K_ixp7500AggSessionMonitor_3	ixp7500AggSessionMonitor
	S_Deepak	Storage	✓	B_Deepak_5	Deepak
	S_Test_GP	Storage	✓	B_Test_GP_7	Test_GP
	S_T_Stats_10	Storage	✓	K_T_Stats_9	T_Stats
	Test_RKS_CSV_Modify	Storage	✓	ReTest_DB_BuildMAPDataBrokerTDRreconstitution	CSV Feed: /opt/abc

Figure 156: IXP Subsystem Overview

**Note:** You must explicitly apply all IXP configuration changes to each IXP subsystem. You are prompted if there is any change to the subsystem by a message banner at the top of the screen.

## About IXP Subsystem Functions

The general maintenance and configuration options for a specific IXP Subsystem are accessed by right-clicking on the selected IXP subsystem. (Select **Sites > subsystem**) The pop-up menu opens, shown below. The options are described in the table and sections below.

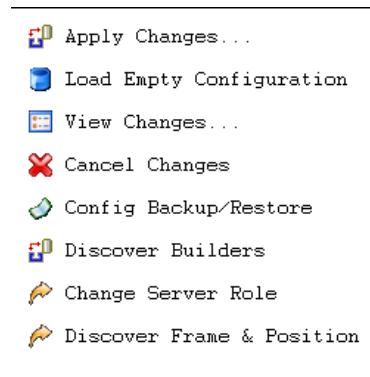


Figure 157: Subsystem Pop-Up Menu

Option	Description
Apply Changes	Enables you to apply any changes that have been made to the particular IXP subsystem. You are notified if there are any changes to the system and you use this option to accept the changes.
Load Empty Configuration	Enables you to configure an IXP subsystem by using a template configuration.
View Changes	Enables you to view any changes that have occurred in the subsystem in order to accept the change or cancel them.
Cancel Changes	Enables you to cancel any changes that have been made to the subsystem.
Config Backup/Restore	Enables you to backup or restore a previous backup configuration in case of system failure.
Discover Builders	Enables you to discover xDR builders for the subsystem if upgrades to builders have been installed on the system.
Modify server roles	Enables you to change the role of a server
Synchronize Frame and Position	Enables you to synchronize the subsystem after you have modified the frame and position of a host in the IXP subsystem.

TABLE 86: IXP SUBSYSTEM POP-UP MENU OPTIONS

## About applying changes to a subsystem (Synchronizing)

**Note:** To Apply Changes to a Subsystem you need to be assigned the role *NSPConfigManager*.

Anytime you add, modify or delete an object in an IXP Subsystem, you need to Synchronize the Subsystem so that the changes are recognized by the PIC system. CCM has an IXP Subsystem prompt option that alerts you to any changes that have occurred.

Configuration has occurred on the following IXP subsystems: *IXPSubsystemName*, changes must be applied or cancelled.

Complete these steps to Apply Changes to a Subsystem: Select the **Subsystem** that has been modified:

1. Right-click and select **Apply Changes...** from the pop-up menu.  
CCM displays the *configuration changes* that will be applied to the selected IXP subsystem. At this point, you are prompted if you want to continue, cancel, or undo.
2. Click **Continue**.  
The *configuration* is validated and any warning messages are displayed.

**Note:** If there are warnings, you are prompted if you still want to apply changes.

3. To apply changes, click **Apply**.

## Viewing Changes to an IXP Subsystem

Complete these steps to view the most recent synchronization and any pending changes on an IXP Subsystem:

1. Select **Mediation > Site >IXP Subsystem**.
2. From the subsystem right-click menu select **View Changes**.

The screen shows the *time* and *date* of the last synchronization and any pending changes in the bottom table.

## Enabling and Disabling IXP Subsystem Automatic Failover

Complete these steps to enable or disable the automatic failover for an IXP Subsystem:

1. Select **Mediation > Site > IXP Subsystem**.
2. Right-click and select **Enable / Disable Auto Failover**.

**Note:** Enabling and disabling an IXP subsystem can also be performed from the Actions column in the IXP list screen.

3. Select either **Enable** (default setting) or **Disable**.
4. Click **Done**.

**Note:** For the changes to take effect, click **Apply Changes**.

## Loading an Empty Configuration on to an IXP Subsystem

Complete these steps to load an empty configuration on an xMF Subsystem:

1. Select the **Acquisition > Site >xMF Subsystem**.
2. From right-click menu select **Load Empty Configuration**.

**Note:** A warning appears stating that loading an empty configuration un-route PDU Dataflow at the associated xMF subsystem. (For more information, see [Avoiding Lost PDU Routes Due to Cancel Changes on an xMF subsystem](#).)

3. To continue to load an empty configuration, click **OK**.

**Note:** For changes to take effect, click **Apply Changes** from the subsystem right-click menu.

## Cancelling Changes to an IXP Subsystem

You can cancel changes to a subsystem by using the Cancel Changes option.

**Note:** Choosing "Cancel Changes" on an xMF Subsystem removes the existing configuration (any changes that have occurred) of that subsystem and restores the latest applied (active) configuration which includes Monitoring Groups in the case of IMF or Card/Port/Link Mapping and Traffic Classifications (TCs) in the case of PMF. Feeder Thresholds, xMF subsystem parameters and PDU Dataflow are preserved (but the PDU routes are not preserved). This action also enables the "Apply Changes" banner for that xMF subsystem. PDU dataflow routing can be restored either by modifying the Build DFPs on the IXP subsystem in order to re-associate the Dataflow with the DFPs, or by restoring the last applied configuration on the IXP subsystem that contains the Build DFPs (see next note for constraints on restoring IXP).

Complete these steps to cancel changes for a subsystem. Again, if any changes have occurred, you are prompted with this message:

Configuration has occurred on the following IXP subsystems: IXPSubsystemName, changes must be applied or cancelled.

**Note:** To **Apply Changes** to a subsystem you need to be assigned the role *NSPConfigManager* or *NSPAdministrator*.

1. Select the **Subsystem** that needs to have the changes cancelled.
2. Right-click and select **Cancel Changes** from the pop-up menu.  
CCM displays the *configuration changes* that will be applied to the selected IXP subsystem. At this point, you are prompted if you want to continue, cancel, or undo.
3. Click **Undo**.  
The *last configuration* that was applied to the IXP subsystem is reloaded.

## Backup and restoring an IXP Subsystem

CCM has a backup/restore function that enables you to backup and archive the IXP configuration per subsystem. CCM also has a option to restore the IXP configuration from an archived backup. This option enables you to bring the configuration of an IXP Subsystem to any previously working state.

Complete these steps to backup or restore an IXP Subsystem:

**Note:** To apply changes to a subsystem you need to be assigned the role *NSPConfigManager*.

1. Select the **Subsystem** that needs a backup.
2. Right-click and select **Config Backup/Restore** from the pop-up menu.  
CCM displays a table of named archived backups.

	Backup Name	Active	Actions
1	ixpConfig_Mon Jul 28 10:45:30 UTC 2008	Yes	
2	ixpConfig_Mon Jul 28 10:17:51 UTC 2008	No	
3	ixpConfig_Mon Jul 28 09:05:45 UTC 2008	No	
4	ixpConfig_Mon Jul 28 08:43:12 UTC 2008	No	
5	ixpConfig_Mon Jul 28 07:25:20 UTC 2008	No	
6	ixpConfig_Mon Jul 28 06:59:57 UTC 2008	No	
7	ixpConfig_Mon Jul 28 06:37:59 UTC 2008	No	
8	ixpConfig_Mon Jul 28 03:58:34 UTC 2008	No	

Figure 158: Archived List Of Configurations

3. Click **Add**.

CCM automatically names the backup and stores a configuration backup in the NSP database.  
CCM maintains up to *nine backups* per subsystem.

## Deleting an archived Backup

You can also delete an archived backup file by using the delete function described here.

Complete these steps to delete a backup file:

**Note:** To apply changes or delete a subsystem you need to be assigned the role *NSPConfigManager*.

1. Select the **Subsystem** that needs backups deleted.
2. Right-click and select **Config Backup/Restore** from the pop-up menu.  
CCM displays a table of named archived backups.
3. Select the **Archived Version** that you want from the list.
4. Click **Delete**.
5. Click **OK** at the prompt.  
The *archived backup* is deleted from the list.


## Discovering xDR Builders

You use the Discover xDR builders option if there has been an update to the xDR builders on your IXP subsystem.

Complete these steps to discover xDR builders for a specific IXP Subsystem:

1. Select and right-click on the **IXP Subsystem** that needs the builders.
2. Select **Discover Builders** from the pop-up menu.

The system begins the discovery process. The Discovery screen opens shown below.

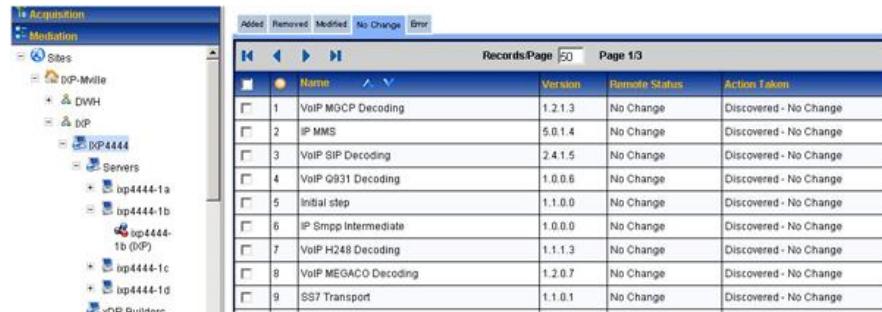

The screenshot shows the 'Discovery Results' screen. The left pane displays a tree view of the IXP subsystem structure, including 'Sites', 'DWH', and 'IXP' with a node 'IXP4444'. The right pane is a table titled 'Discovery Results' with the following data:

	Name	Version	Remote Status	Action Taken
1	VoIP MGCP Decoding	1.2.1.3	No Change	Discovered - No Change
2	IP MMS	5.0.1.4	No Change	Discovered - No Change
3	VoIP SIP Decoding	2.4.1.5	No Change	Discovered - No Change
4	VoIP Q931 Decoding	1.0.0.6	No Change	Discovered - No Change
5	Initial step	1.1.0.0	No Change	Discovered - No Change
6	IP Smpp Intermediate	1.0.0.0	No Change	Discovered - No Change
7	VoIP H248 Decoding	1.1.1.3	No Change	Discovered - No Change
8	VoIP MGACO Decoding	1.2.0.7	No Change	Discovered - No Change
9	SS7 Transport	1.1.0.1	No Change	Discovered - No Change

Figure 159: Discovery Results Screen

3. The Results screen shows any changes to the builders (additions, deletions, errors or builders that showed no change).

## Discovering Frame and Port Position

You use the Discover Frames and Position option if there has been an update to the IXP subsystem.

Complete these steps to discover the frames and positions for a specific IXP Subsystem:

1. Select and right-click on the **IXP Subsystem** that needs the discovery process.
2. Select **Discover Frames and Positions** from the pop-up menu.

The discovery process begins. When completed a prompt appears stating, "Discovered Frame \* Position for all hosts under subsystem - name of subsystem."

## Modifying a server Role

Server roles (primary/secondary/ancillary server roles) are designated for each IXP server by CCM the subsystem and applications are discovered. CCM assigns primary status only to the server that has 1a designation. Secondary status is designated to the server labeled 1b and ancillary status to the rest if the servers (1c, 1d, 1e, etc.). The order of discovery of the hosts does not matter. If you need to switch a server role, say, switching a primary to secondary, you are automatically directed to *Apply Changes* screen where changes have to be manually activated on the IXP subsystem.

## Changing a primary server Role

Complete these steps to change the Primary Server role:

1. Select and right-click on the **IXP Subsystem** for the role change.
2. Select **Modify Server Roles** option.

The *role change* screen opens for changing the primary and secondary server roles shown below.

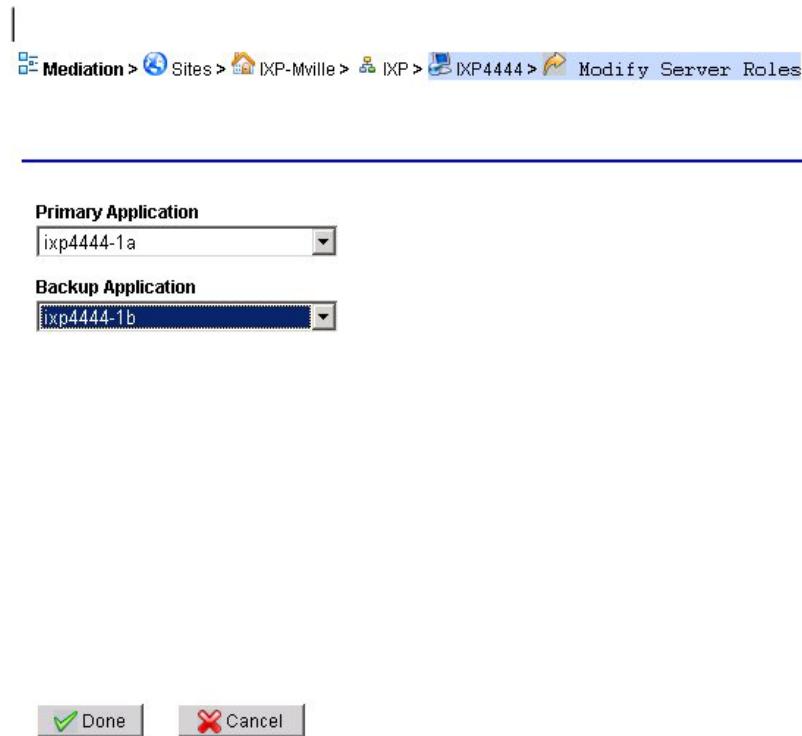


Figure 160: Server Role Change Screen

3. Select the **Server** to be the *primary application*.
4. Select the **Server** to be the *secondary application*.
5. Click **Done**.

The request is submitted to the system and CCM invokes the NSP server to perform the change role process. CCM updates the display indicating that the discovery request was successful.

## About IXP Storage Servers

Once you have added an IXP Subsystem in the Equipment Registry, that IXP Subsystem is visible in the Mediation Perspective. From this perspective you view the storage servers that have been assigned to that subsystem. By selecting **Mediation > Site > IXP Subsystem > Servers > Storage**. The list of storage servers opens.

	#	Name	IP Address	State
	1	ixp0500-1a_DWH	10.236.0.120	ACTIVE

Figure 161: Storage Server Object and List Table

## Changing the State of a Storage Server

Complete these steps to change the state of an IXP storage server:

**Note:** If an IXP storage server is in "Query" state, no configuration actions can be undertaken. All servers must be in "Active" state when sessions are created for queries on such sessions to be successful.

Otherwise, if a query is launched in ProTrace on a newly created session, a "Unable to execute query: ORA-00942: table or view does not exist." will appear.

1. Select **Mediation > Site > IXP Subsystem > Server > Storage**.  
The storage server list screen opens.
2. Select the **State** from the pull-down menu in the *State column*.

#	Name	IP Address	State
1	ixp0500-1a_DWH	10.236.0.120	ACTIVE
			MAINTENANCE ACTIVE QUERY ONLY

Figure 162: Add Screen

3. Click **OK** at the prompt.  
The *state* is changed.

## IXP Storage Pool States

You can manage an IXP storage pool by managing the state of the server on the specific subsystem. Each state also has an effect on an NSP application. These tables show the states and the effect on specific applications.

State	Description
Active	Normal (default) state. Data being written and read from the server.
Maintenance	This state is designated if there is maintenance being performed on the server, for example, changing disk or upgrading RAM. There is no ability to query or to write any data.
Query Only	This is a transitional state between active and maintenance used for not missing any data. The server will be accessible to be read by applications, such as Data Feed Export and ProTraq, to gain their information before the state moves to maintenance.

TABLE 87: STORAGE POOL SERVER STATES

Values associated with each state.

**Note:** If an IXP storage server is in "Query" state, no configuration actions can be undertaken. All servers must be in "Active" state when sessions are created for queries on such sessions to be successful. Otherwise, if a query is launched in ProTrace on a newly created session, "Unable to execute query: ORA-00942: table or view does not exist." will appear.

Value in Cell	Description
OK	Applications behave normally.
(Warning) Ignore Server	During operation, application will ignore server status and continue to reading, but providing a warning that data could not be accessed from a specific subsystem.
Suspend	Application will suspend any operation and wait until server has restored functionality.
Ignore Server	During operation the application ignores the server (from the storage pool) for reading and provides xDRs from other servers.

TABLE 88: VALUES ASSOCIATED WITH EACH STATE

Application	Active	Query Only	Maintenance	Down
ProTrace	OK	OK	Ignore Server (Warning on prompt)	Ignore Server (Warning on prompt)
ProPerf	OK	OK	Ignore Server (Warning on prompt)	Ignore Server (Warning on Prompt)
Data Feed	OK	OK	Ignore Server	Suspend
Historical KPI	OK	OK	Ignore Server	Suspend
Scheduled Export	OK	OK	Ignore Server (Show text warning in the exported archive)	Suspend

TABLE 89: NSP APPLICATIONS EFFECTED BY EACH STATE

## Configuring Servers in an IXP Subsystem

Once you have added an IXP subsystem in the Equipment Registry, that IXP subsystem is visible in the Mediation perspective. From this perspective you can perform the following procedures on servers in that IXP subsystem:

**Note:** The first two topics in the list are to be accomplished first. For example, you create input streams before you create Dataflow Processings. The other topics are used to manage the Dataflow Processings you have created.

- List the servers on an IXP subsystem
- Monitor storage capacity on a DWH server
- Manage the sessions on that IXP subsystem
- Manage the external PDU streams on that IXP subsystem
- Manage input streams on that IXP subsystem
- Manage the dataflow processings on that IXP subsystem
- Manage configuration for Q.752 processing on that IXP subsystem
- Manage the distribution on that IXP subsystem for load balancing or during server maintenance
- Manage the xDR builders on that IXP subsystem
- View software information associated with that IXP subsystem
- Manage the subsystem preferences for that IXP subsystem

## About Streams

Streams are the connectors that enable PDUs to be routed from xMFs to IXPs. The two kinds of streams that can be created on an IXP subsystem are:

- PDU - that originate from PDU Dataflows, which are created in xDR Subsystems, these streams
- serve as the input streams to xDR Build Dataflow
- xDR - that originate from external IXP Subsystems, legacy or current, and are connected to an XDR input stream.

**Note:** The XDR input stream name needs to match the stream name of the legacy subsystem.

**Note:** CCM supports up to 500 streams (including PDU as well as xDR) per IXP subsystem. As soon as user crosses 255 streams per IXP Subsystem, CCM places a constraint on each server within the IXP subsystem that it cannot exceed 127 Streams and shows an error message when changes are applied to the Subsystem.

Every unused stream is counted for each IXP server for the corresponding IXP Subsystem. An unused stream means streams that are not used by any IXP server. Unused streams are listed in the warning tab when applying changes to the corresponding IXP subsystem.

For example, one IXP Subsystem consists of three servers and each server uses 100 streams. If a user has created a Stream that is not used by any process, then CCM recognizes this unused Stream as an extra Stream for each server so that each server now have 101 streams.

In addition, all monitoring (system generated) and MFP based streams are also counted for each IXP server.

Selecting **Site > IXP Subsystem > Streams** in the object tree shows a list of the streams for that server.

	#	Stream Name	Stream Type	User Information	Use RID	Critical
<input type="checkbox"/>	1	K_ixp0456AggSessionMonitor_127	xDR	Created for KPIs	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
<input type="checkbox"/>	2	O_ixp0456PoolMonitor_126	xDR	Created for KPIs	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
<input type="checkbox"/>	3	ixp0456BuildMonitor	xDR	Created for BuildMonitor by lxp.	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
<input type="checkbox"/>	4	ixp0456OperateMonitor	xDR	Created for OperateMonitor by lxp.	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
<input type="checkbox"/>	5	ixp0456PoolMonitor	xDR	Created for PoolMonitor by lxp.	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
<input type="checkbox"/>	6	ixp0456StreamMonitor	xDR	Created for StreamMonitor by lxp.	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Figure 163: Streams List

### **Adding a PDU Stream**

Input Streams are constructs for grouping Dataflows for the purpose of routing to one or more xDR builders. The grouping is done so that PDUs belonging to a dataflow are routed over a single communication stream to an xDR generator, resulting in optimized data collection resources.

Complete these steps to add a PDU stream:

1. Select **Mediation > Sites > IXP > IXP Subsystem > Streams**.
2. Click **Add** from the tool bar.

Stream Name

Stream Type

Pdu  xDR

Use RID

Critical

User Information

Figure 164: Add Streams Screen

3. Type the **Stream Name**.
4. Select the **Stream Type (PDU)**.
5. (Optional) Select whether to **Use RID** or not.
6. Select whether the stream is **critical** or not.

**Note:** The critical field in the stream creation screen is used to indicate the behavior of a given Dataflow Processing when it is fed by multiple input Streams. When the critical box is activated, it designates that the Dataflow Processing will stop processing PDU's/XDRs if any critical input

stream stops having traffic. When the field is not selected, it indicates the Dataflow Processing will continue to process data even if some of the streams have no traffic.

7. (Optional) Enter any pertinent **User Information**.

8. Click **Create**.

The *stream* is added to the list.

#### **Adding an xDR Stream**

Complete these steps to add an xDR stream from one IXP subsystem to be used for input to an external IXP Subsystem:

**Note:** To add an xDR stream there must be more than one IXP Subsystem available. xDR Streams are created when external Streams, Streams from some other IXP Subsystem so that xDRs from one IXP are taken as input on another IXP, are needed.

1. Select **Mediation > Sites > IXP > IXP Subsystem > Streams**.
2. Click **Add** from the tool bar.
3. Select the **xDR** as the stream type.
4. Select the **IXP Subsystem** that contains the xDR stream.
5. Select an **xDR Stream** from the list.
6. (Optional) Select if the stream is to **Use RID**.
7. (Optional) Select whether the stream is **critical** or not.

**Note:** The critical field in the stream creation screen is used to indicate the behavior of a given Dataflow Processing when it is fed by multiple input streams. When the critical box is activated, it designates that the Dataflow Processing will stop processing PDU's/XDRs if any critical input Stream stops having traffic. When the field is not selected, it indicates the Dataflow Processing will continue to process data even if some of the Streams have no traffic.

8. (Optional) Enter any pertinent **User Information**.
9. Click **Create**. The system creates an external Stream with the same name as on the external IXP Subsystem.

**Note:** Click **Apply Changes** for the IXP subsystem for the changes to take effect.

#### **Modifying a Stream**

1. Select **Streams > List**.  
The *streams* list screen opens.
2. Select the **Stream** to be modified.
3. Click **Modify**.  
The screen for that *stream* opens shown below.

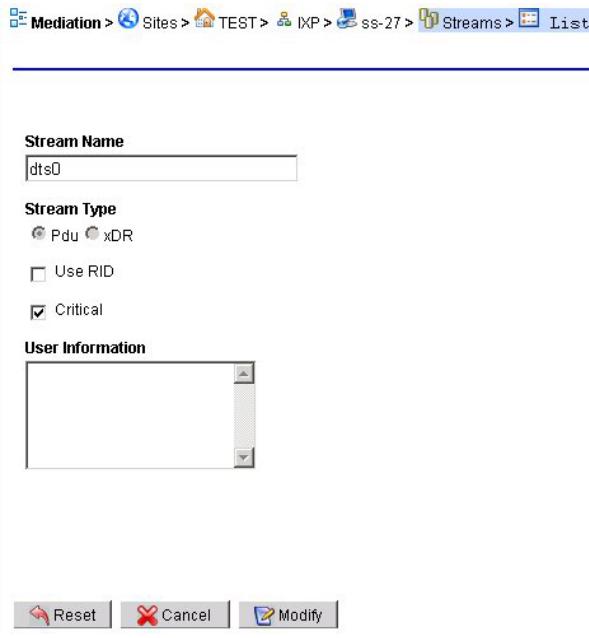


Figure 165: Stream Modify Screen

4. Make the **necessary modifications**.
5. Click **Modify**.

The system is updated and you are returned to the *Streams List* screen with the modifications.

#### **Deleting a Stream**

**Note:** You cannot delete a stream that has Dataflow Processings associated with it. If the Stream does have any dependencies, you will get an error message.

Complete these steps to delete a stream.

1. Select **Streams > List**.  
The streams list screen opens.
2. Select the **Stream** to be deleted.
3. Click **Delete**.
4. Click **OK** at the prompt.  
The *Stream* is deleted from the list.

## **Adding an External PDU Stream**

The primary purpose of the external PDU stream function is to configure IXP to accept PDUs from third party sources such as Neptune, Ocean or Cisco PMP.

Complete these steps to configure an external PDU Stream:

1. Select **Mediation > Site > IXP > Subsystem > External PDU Streams**.  
The External PDU Stream List screen opens.
2. Click **Add** on the tool bar or in the contextual menu.  
The *Add* screen opens.

## **Configuring an External PDU Stream for Neptune**

Listed are the steps to configure external PDU stream for Neptune:

1. Select **Mediation > Site > IXP > Subsystem > External PDU Streams**.  
The *External PDU Stream List* screen opens.
2. Click **Add** or select external PDU stream and click **Modify** on the tool bar.

The external PDU stream edition screen opens.

3. Select **NEPTUNE** for **Type**. (Available only at creation. Disable during modification)
4. Enter **Name** to identify the name of the stream in the subsystem. (Available only at creation. Disable during modification)
5. Enter any **User information**.
6. Enter Neptune process flow **IP address** or select already registered Neptune probe. In case of probe selection, IP address, Login and Password fields are automatically completed and disabled.
7. Enter capture output **Port**.  
Port is 56000 for UP captures and 56001 for CP capture, xDR and Others.
8. Select whether the stream is **Active** or not.
9. Select if the stream is **Critical** or not.
10. Select the **Server** that will run the external stream interface process.
11. In case of no registered probe was selected, enter probe **Login** and **Password**.
12. Add **Additional parameters** ProbePortId to specify the output port ID on the probe.

Capture	Port:ID
User Plane 1	56000:0 to 56000:9
User Plane 2	56000:10 to 56000:19
User Plane 3	56000:20 to 56000:29
Control Plane	56001:0
RADIUS/DIAMETER	56001:8
DNS	56001:9
Traffic counter	56001:10
TCPDR	56001:11

TABLE 90: NEPTUNE OUTPUT CAPTURE PORT AND ID

13. Click **Create** or **Modify**.
14. **Synchronize** the IXP Subsystem to consolidate changes into the system.

Type: NEPTUNE

Name: External PDU Stream

User information:

- IP Address: 56000
- Port: 56000
- Active:
- Critical:
- Server: ixp2009-1b
- Login: tech\_astellia
- Password: (empty)

Additional parameters:

ProbePortId: (empty)

**Note:** Click here to add a new name value pair.

Figure 166: External PDU Stream for Neptune

### Configuring way management feature

This feature should be used on Gb and IU-PS external PDU streams to configure the direction of each PDU received by the Neptune probe.

Listed are the steps to configure direction of received PDU:

1. Copy *Neptune loadbalancing files* on IXP primary server in directory /var/TKLC/ixp/NeptuneFiles

The *Neptune loadbalancing file* names must contain at least the type of IP addresses (SGSN, RNC or BSC).

Example:

- *Neptune loadbalancing file* name: *BSC\_Gb\_Topo1.txt*
- *Neptune loadbalancing file* contains:  
*Gb topology1 BSC for loadbalancing*

```
NEPIPADDR
10.24.143.106
10.24.143.102
10.24.143.99
```

2. Run the script *UploadNeptuneFiles.sh* and check the log (/var/TKLC/log/ixp/UploadNeptuneFiles.log) on the IXP primary server in cfguser to update the table *GlobalParam* with the IP addresses held in the *Neptune loadbalancing files*,
3. In CCM, select **Mediation > Site > IXP > Subsystem > External PDU Streams**.  
The *External PDU Stream List* screen opens.
4. Select external PDU stream and click **Modify** on the tool bar.
5. Declare a new entry in the **Additional parameters**, call it **NeptuneFile** and give it the name(s) of the *Neptune loadbalancing file(s)*. The IP addresses provided in these files will be used by the *External PDU Stream* to define the direction of each PDU.
6. Click **Modify**.
7. **Synchronize** the IXP Subsystem to consolidate changes into the system.

**Configuring loadsharing feature on IXP**

This feature might be used on Gb and IU-PS external PDU streams to loadshare PDU to several DataFlow Processings. This feature is based on *Neptune loadbalancing files* like the way management feature.

1. In CCM, select **Mediation > Site > IXP > Subsystem > External PDU Streams**.  
The *External PDU Stream List* screen opens.
2. Select external PDU stream and click **Modify** on the tool bar.
3. Select a value for the **Loadbalancing** (between 2 and 8)
4. Declare a new entry in the **Additional parameters** call it **NeptuneFile** and give it the name(s) of the *Neptune loadbalancing file(s)*. The IP addresses provided in these files will be used by the *External PDU Stream* to define the direction of each PDU and each *Neptune loadbalancing file* is used to feed one DataFlow Processing input stream.

Example:

- *Neptune loadbalancing file* names: *GbBSCTopology1.txt* and *GbBScTopology2.txt*
- Name of *External PDU Stream*: *NEP\_1\_Gb*
- **Loadbalancing: 2**
- **Additional parameters** NeptuneFile: “*GbBSCTopology1/GbBScTopology2*”

The streams *NEP\_1\_Gb\_1* and *NEP\_1\_Gb\_2* are automatically created.

Remark: If *External PDU Stream* is already used by a DataFlow Processing, then changing the **loadsharing** parameter generates the following error: “*Error while modifying External PDU Stream : 'NEP\_1\_Gb' under IXP subsystem 'ixp2009' This Stream is input for some dataflow processing(s) and hence can't be deleted*”. It is necessary to modify Build DataFlow Processing in order to not use the stream *NEP\_1\_Gb* because loadsharing will create the stream *NEP\_1\_Gb\_1*, *NEP\_1\_Gb\_2*...

5. Click **Modify**.
6. **Synchronize** the IXP Subsystem to consolidate changes into the system.

#### **Configuring filtering of FLOW CONTROL PDUs feature on IXP**

This feature might be used on Gb external PDU streams to filter the FLOW CONTROL PDU in IxpInterface process.

The FLOW CONTROL PDU filter will be applied on:

- IPv4/UDP packets on port 20000,
- NS Unit Data type,
- BSSGP filtered types are 0x26, 0x27, 0x28 and 0x29 and all other kind of PDU will pass the filter,

1. In CCM, select **Mediation > Site > IXP > Subsystem > External PDU Streams**.  
The *External PDU Stream List* screen opens.
2. Select external PDU stream and click **Modify** on the tool bar.
3. Declare a new entry in the **Additional parameters** call it **EnableGbFlowControlFilter** and give it a value of 1 (0 is used to disable the feature)
4. Click **Modify**.
5. **Synchronize** the IXP Subsystem to consolidate changes into the system.

#### **Configuring an External PDU Stream for OCEAN**

Listed are the steps to configure external PDU stream for Neptune:

1. Select **Mediation > Site > IXP > Subsystem > External PDU Streams**.  
The *External PDU Stream List* screen opens.
2. Click **Add** or select external PDU stream and click **Modify** on the tool bar.  
The external PDU stream edition screen opens.
3. Select **OCEAN** for **Type**. (Available only at creation. Disable during modification)
4. Enter **Name** to identify the name of the stream in the subsystem. (Available only at creation. Disable during modification)
5. Enter any **User information**.
6. Enter **IP address** of the OCEAN probe.
7. Enter connexion **Port**.  
Default is 2030.
8. Select whether the stream is **Active** or not.
9. Select if the stream is **Critical** or not.
10. Select the **Server** that will run the external stream interface process.
11. Enter probe **Login** and **Password**.
12. Enter the type of **Service**.  
Capture is the default service type.
13. Enter the **Transmission timeout** value (in ms units).  
Default value is 4000.
14. Enter the **Connection timeout** value (in ms units).  
Default value is 4000
15. Enter the **Max number of connection attempts**.  
Default is 50000.

Note: If neither probe nor simulator is ready when trying to connect to the interface, an attempt is performed about each second (the real delay depends of Astellia API timeout). When the max

number is reached (50,000) an alarm is raised and no more connection attempt will be performed until the process is restarted. To have the system attempt to connect until it is successful, set Max number of connection attempts to "0" (unlimited attempts at connection).

16. Enter the **Interface buffer size** value (in octets).  
Default is 49512.
17. Enter the **Socket buffer size** value (in octets).  
Default is 262144.

Type	OCEAN
Name	
<b>User information</b>	
External PDU Stream	
IP Address	
Port	2030
Active	<input checked="" type="checkbox"/>
Critical	<input checked="" type="checkbox"/>
Server	ixp2009-1b
Login	RTcpt
Password	
Service	Capture
Transmission timeout (ms)	4000
Connection timeout (ms)	4000
Max number of connection attempts	50000
Interface buffer size (octets)	49512
Socket buffer size (octets)	262144
<b>Additional parameters</b>	
  Click here to add a new name value pair.	

Figure 167: External PDU Stream for OCEAN

## Configuring an External PDU Stream for Cisco PMP

Listed are the steps to configure external PDU stream for CISCO PMP:

1. Select **Mediation > Site > IXP > Subsystem > External PDU Streams**.  
The *External PDU Stream List* screen opens.
2. Click **Add** or select external PDU stream and click **Modify** on the tool bar.  
The external PDU stream edition screen opens.
3. Select the **PMP** for **Type** (Available only at creation. Disable during modification).  
*Note:* PMP option is subjected to license agreement.
4. Enter **Name** to identify the name of the stream in the subsystem (Available only at creation. Disable during modification).
5. Enter any **User information**.
6. Enter **IP Address** of the Cisco switch.
7. Select the **Server** that will run the external stream interface process.
8. Enter connexion **Port** (listening UDP port).
9. Select whether the stream is **Active** or not.
10. Select if the stream is a **Critical** one or not.
11. Click **Create** or **Modify**.
12. **Synchronize** the IXP Subsystem to consolidate changes into the system.

Type	PMP
Name	
User information	External PDU Stream
IP Address	
Port	33500
Active	<input checked="" type="checkbox"/>
Critical	<input checked="" type="checkbox"/>
Server	ixp2009-1b

Additional parameters

  Click here to add a new name value pair.

Figure 168: External PDU Stream for PMP

## Configuring Additional Parameters for an External PDU Stream

Additional parameters allows to add extra name-value pairs to external PDU stream configuration. Complete these steps to configure the additional parameters of an external PDU Stream:

1. Select **Mediation > Site > IXP > Subsystem > External PDU Streams**.  
The External PDU Stream List screen opens.
2. Click **Add** or select external PDU stream and click **Modify** on the tool bar.  
The external PDU stream edition screen opens.
3. Section **Additional Parameters** is at the bottom.

<u>Additional parameters</u>	
 	Click here to add a new name value pair.

Figure 169: Additional Parameters Screen

4. Click the plus button  to add new entry
5. Enter **Name** in the first field (for example SganNb)
6. Enter **Numerical Value** in the second field
7. Repeat steps 4-6 to add additional value pairs.
8. Click **Create** or **Modify**
9. **Synchronize** the IXP Subsystem to consolidate changes into the system.

## Configuring xDR Dataflow Processings

The most important aspect of IXP configuration is the creation of xDR Dataflows. An xDR Dataflow is made of interconnected processes referred to as *Dataflow Processings*.

Dataflow Processings are categorized into three types listed in the order that they should be created:

1. Building - this dataflow processing creates or builds xDRs.
2. Operation - this dataflow processing generates statistics and applies filters for data enrichment.
3. Storage - this dataflow processing stores information on the system. For the Storage Type DFP, user can create one of three types of Store DFPs
  - a. Datawarehouse (Storage in Session)

- b. DataBroker ( Storage in Files on NFS mounted directories for DataBroker (Syniverse) builders
- c. CSV ( Storage in CSV Files with Formatting capabilities)

## About Dataflow Processings

Dataflow Processing is the receiving end from a PDU Stream or PDU Dataflow as configured on the IMF/PMF. The Dataflow Processing configuration is used to build an xDR for storage on the IXP. The configuration is required based on the protocol and type of post-processing prior to storage on the IXP. Once a Dataflow Processing has been configured, the IXP will start receiving MSUs/PDUs from the IMF/PMF over the input stream that was created for the IMF/PDU PDU Data Flows.

## About Dataflow Processing Retention Times

Dataflow Processing chains are the normal sequence of processes that correlation goes through until xDRs are stored in the IXP. Each DFP has a retention period in seconds. The retention time is the duration of PDUs or xDR retention in the chronological sorting list that is used to buffer input to the IxpBuild, IxpOperate and IxpStore processes.

**Note:** The IxpStore process has an additional tuning parameter called a flush timeout. The flush timeout is the frequency of the xDR buffer flushing in the IxpStore process, (xDR writing to Oracle), when the maximum size of a buffer is not reached.

Both the retention time and the flush timeout have a direct impact on the time between the transmission (by xMF) of the PDU opening a transaction and the writing of the corresponding xDR into the Oracle database. The valid range for these parameters is 0-60 seconds. The default value for these parameters is 5 seconds.

These parameters are specific to each DFP instance so that you can fine tune a DFP according to the protocol type it uses. For example, more retention is needed when the sources come from a pair of mated STP (2 sources) and less retention time is needed when the DFP is using a single IP tap.

Note: If the retention time is too small (depending on the network configuration), there is a possibility of an incorrect correlation. The impact can occur when the retention time is acceptable for *ProTrace* performance but unacceptable for creating valid correlation rates.

## Listing xDR Dataflow Processings

To view a list of all the Dataflow Processings on a server, select **Dataflow Processings** in the object tree. The list opens in the Table section shown here.

From this screen, you can perform the basic functions of adding, modifying and deleting a Dataflow Processings. In addition, you are able sort the rows by clicking on a column of interest.

Dataflow Processings					
	Name	Type	Input Stream(s)	Output Stream(s)(xDR Session(s))	Action
<input type="checkbox"/>	1. _dta_store_20_1_8	Storage	0_dta_store_20_1_7	0_dta_store_20_1	 
<input type="checkbox"/>	2. dta-test2	Building	ss166_in	0_dta_store_5_20_2_9	 
<input type="checkbox"/>	3. dta-1	Building	ss166_in	0_dta_store_20_1_7	 
<input type="checkbox"/>	4. _dta_store_5_20_2_10	Storage	0_dta_store_5_20_2_9	0_dta_store_5_20_2	 

Figure 170: Dataflow Processings List

Column	Description
Select	This column enables you to select a dataflow processing. Use this column when selecting multiple sessions.
Hide/show columns	This column enables you to select the columns you want to view.
Name	Shows the name of the dataflow processing and enables you to sort dataflow processings by ascending or descending order.

Type	Shows the type of session: Storage Operation Building
Input (streams)	Shows the name of the input stream for the dataflow processing.
Output stream	Shows the name of the output stream for the dataflow processing
Active	Is a check box showing whether the dataflow processing is active or not.
Actions	Provides the appropriate actions (modify, delete, etc.) you can perform on the dataflow processing.

TABLE 91: DATAFLOW PROCESSINGS LIST TABLE

## About xDR Dataflow Assistant

The xDR Dataflow Assistant option provides a wizard to help you quickly create a Dataflow Processing. It is a convenient way to add large numbers of xDR Dataflows. *The xDR Dataflow Processing Assistant* assists you with creation of an xDR Dataflow, a chain of IXP Dataflow Processings more efficiently.

The process follows four stages:

- Selecting the input PDU sources
- Selecting the xDR Builders
- (Optional) Enriching the xDRs
- Creating or reusing sessions to store xDRs

### *About Dataflow Naming Conventions*

Depending on the input, the xDR Dataflow created will result in the following types of Dataflow Processings.

- One Build dataflow processing,
- Zero or more Operate dataflow processings,
- Multiple Storage dataflow processings.

All the Dataflow Processings and the intermediate streams are automatically created and named by CCM. The table shows examples of naming conventions used by CCM.

Dataflow Processing Type	Naming convention
Build dataflow processing	User Input
Operation dataflow processing	< name of the session fed by the main stream>_<dataflow processingId> (mandatory)
Storage dataflow processing	S_<corresponding session name>_<dataflow processingId>
Building dataflow processing output stream	B_<corresponding xDR session name>_<streamId>
Operation dataflow processing main output stream (xDRs)	O_<corresponding xDR session name>_<streamId>
Operation dataflow processing secondary output stream (KPIs)	K_<corresponding KPI session name>_<streamId>

TABLE 92: DATAFLOW PROCESSING NAMING CONVENTIONS

### *Creating a Dataflow Processing Using xDR Dataflow Assistant*

The most important aspect of IXP configuration is the creation of xDR Dataflows. An xDR Dataflow is made of interconnected processes referred to as Dataflow processings. Dataflow Processings are categorized into three types listed in the order that they should be created:

- Building - this dataflow processing creates or builds xDRs
- Operation - this dataflow processing generates statistics and applies filters for data enrichment
- Storage - this Dataflow Processing stores information on the system

**Note:** If you do not have licenses to use specific xDR builders, the builder selection screen will not show them.

Configure Dataflow Processings using the xDR Dataflow Assistant.

**Note:** Because Q.752 Processings utilize input streams, you must first create your input streams or PDF Dataflows before you create your Q.752 Processings.

1. Select **IXP subsystem > Subsystem** that needs *Dataflow Processings*.
2. Right-click on the **Subsystem**.  
The *pop-up* menu opens.
3. Right-click on **Dataflow Processings**.
4. Select **xDR Dataflow Assistant** from the pop-up menu.

The first screen of the wizard opens in the Table section shown here.

Step 1: Select PDU Source(s)

Active

	#	PDU Dataflow Name	Type
<input type="checkbox"/>	1	BVT_DF	MSU
<input type="checkbox"/>	2	CCM_BICC_DF	MSU
<input type="checkbox"/>	3	GK_PDUDF	MSU
<input type="checkbox"/>	4	KEN_SS7_DF	MSU
<input type="checkbox"/>	5	PDUDF_GK	MSU
<input type="checkbox"/>	6	TestDataFlow	MSU
<input type="checkbox"/>	7	TestManishDF	MSU
<input type="checkbox"/>	8	mercury_sths1_1	MSU

Server: ixp0456-1a

Select PDU Sources

PDU Streams  PDU Dataflows  SS7  Gb  IP

Previous | Next

Figure 171: xDR Dataflow Assistant Initial Screen-PDU Sources

5. Type in the **Name** of the **Dataflow Process**.
6. Select the **Server**.

**Note:** Do not use the DWH as the server for the Dataflow Process.

**Note:** If multiple Dataflow processes are created, it is recommended that more than one server be used to facilitate load balancing.

7. Select a **PDU Source** from the table.  
You can filter by selecting what type of source you want to view/use. Whether it is a Stream or Dataflow and what category (SS7, Gb, IP)
8. Click **Next** to choose an xDR Builder shown below.

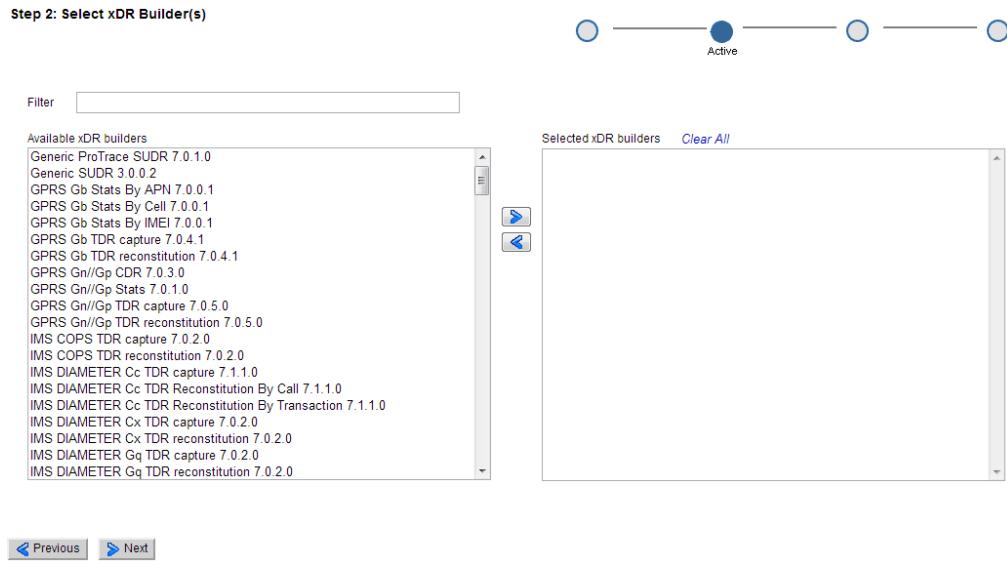


Figure 172: Dataflow Assistant Xdr Builder Selection

9. Select one or more **xDR Builders** from the four categories (SS7, IP, UMTS/GPRS or Others).

**Note:** You can select multiple builders from one or more of the categories.

10. Click **Next** to open the *Optional Enrichment* screen shown here.

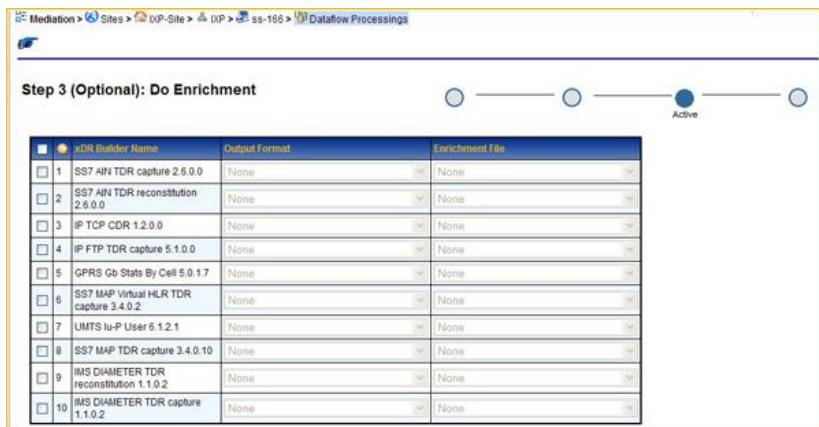


Figure 173: Xdr Assistant - Enrichment Selection

11. (Optional) The Enrichment screen enables you to select specific output format and files to be included into the Dataflow Processing that is to be used in data feed exporting. You can select an existing enrichment dictionary or you can select to upload a new format. On selecting option to upload a new format, there will be an option to either use an existing partial dictionary or upload a new partial dictionary. Partial dictionary will only contain enrichment fields.

To create an enrichment complete these steps:

- Select an xDR Builder.  
The row is highlighted.
- From the Output Format, select an existing enriched dictionary or select option to upload a new format. Tool tip will display the name for base builder dictionary and the partial dictionary for each enriched dictionary in the list.

**Step 3 (Optional): Do Enrichment**

#	xDR Builder Name	Output Format	Enrichment File
1	SS7 MAP TDR reconstitution 7.2.0.0	<input style="width: 100px; height: 20px; border: 1px solid #ccc; border-radius: 5px; padding: 2px 10px;" type="button" value="None"/> <div style="display: none; position: absolute; left: 0px; top: 0px; width: 100px; height: 100px; background-color: #f0f0f0; border: 1px solid #ccc; border-radius: 5px; z-index: 1;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 2;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 3;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 4;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 5;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 6;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 7;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 8;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 9;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 10;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 11;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 12;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 13;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 14;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 15;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 16;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 17;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 18;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 19;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 20;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 21;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 22;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 23;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 24;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 25;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 26;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 27;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 28;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 29;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 30;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 31;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 32;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 33;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 34;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 35;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 36;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 37;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 38;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 39;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 40;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 41;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 42;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 43;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 44;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 45;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 46;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 47;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 48;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 49;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 50;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 51;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 52;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 53;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 54;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 55;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 56;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 57;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 58;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 59;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 60;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 61;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 62;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 63;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 64;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 65;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 66;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 67;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 68;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 69;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 70;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 71;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 72;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 73;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 74;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 75;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 76;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 77;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 78;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 79;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 80;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 81;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 82;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 83;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 84;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 85;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 86;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 87;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 88;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 89;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 90;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 91;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 92;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 93;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 94;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 95;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 96;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 97;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 98;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 99;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 100;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 101;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 102;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 103;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 104;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 105;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 106;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 107;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 108;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 109;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 110;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 111;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 112;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 113;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 114;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 115;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 116;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 117;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 118;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 119;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 120;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 121;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 122;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 123;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 124;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 125;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 126;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 127;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 128;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 129;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 130;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 131;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 132;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 133;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 134;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 135;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 136;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 137;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 138;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 139;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 140;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 141;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 142;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 143;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 144;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 145;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 146;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 147;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 148;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 149;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 150;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 151;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 152;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 153;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 154;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 155;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 156;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 157;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 158;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 159;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 160;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 161;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 162;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 163;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 164;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 165;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 166;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 167;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 168;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 169;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 170;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background-color: #fff; border: 1px solid #ccc; border-radius: 5px; z-index: 171;"></div> <div style="position: absolute; left: 50%; top: 50%; width: 100%; height: 100%; background	

**Step 3 (Optional): Do Enrichment**

#	xDR Builder Name	Output Format	Enrichment File
1	SS7 MAP TDR reconstitution 7.2.0.0	SS7 MAP TDR_ENR_3_7.2.0	None

**Figure 177: Created Enriched Dictionary**

- f. From the Enrichment select to upload a new file or select none from the pull-down list.
- g. Repeat steps a-c for each builder.
12. Click Next to configure xDR sessions as shown below.

Note: IF session point code feature is enabled then to configure flavor of session refer [Appendix D: Defining and Modifying Flavor \(PC Format\) of Session at CCM](#)

Step 4: Configure Session(s)		
xDR Builder Name	Session Name	Life Time(hours)
1 IP FTP TDR capture		
2 IMS DIAMETER TDR capture		
3 UMTS Iu-P User		
4 SS7 MAP Virtual HLR TDR capture		
5 IMS DIAMETER TDR reconstitution		
6 GPRS Gb Stats By Cell		
7 SS7 AIN TDR capture		
8 SS7 AIN TDR reconstitution		
9 SS7 MAP TDR capture		
10 IP TCP CDR		

**Figure 178: xDR Assistant - Configuring Sessions Screen**

13. Type in the **Session Name**.
14. Type in the **Life Time** (in hours the default is 72 hours).

**Note:** The Life Time defines how long an xDR is stored. It is a tuning parameter used as a safeguard to conserve disk space and is an important factor in managing your system. After the set amount of time, the xDRs are deleted from the disk. The longer the life time, the longer that disk space is used by the xDRs. It is important to know how much storage you have on your system when setting the Life Time parameter. If the parameter is set too high, then more disk space will be required than is available on the IXP server. Disk space used per xDR will vary from session to session depending upon the number of columns and enrichment settings.

15. Repeat **steps 11-14** for each builder session.

16. Click **Done**.

For changes to take effect, click right-click on the IXP subsystem that has changed, then select **Apply Changes** from the menu.

## About Neptune Assistant

The Neptune Assistant option provides a wizard to help you quickly create all required IXP configuration elements to connect a Neptune probe:

- External PDU streams
- Build and store dataflow processings
- Sessions

### *About Naming Conventions*

The name of all created element from Neptune Assistant will include the Neptune probe name and will use same convention as *xDR Dataflow Assistant*.

### *Access to Neptune Assistant*

1. Select **Mediation > Site > IXP > Subsystem**.
2. Right-click on the **Subsystem**.

The *pop-up* menu opens.

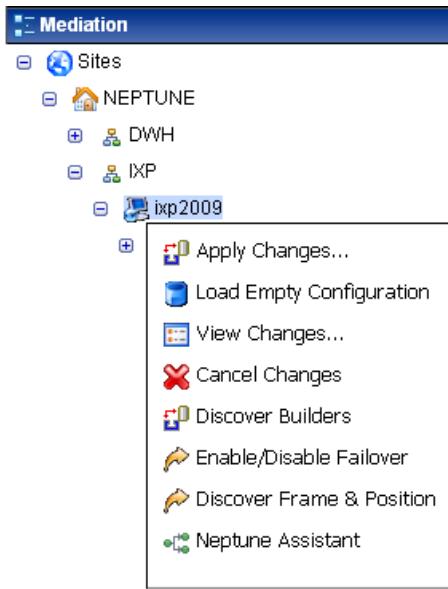


Figure 179: Neptune Assistant access

3. Click on **Neptune Assistant**.

The Neptune probe list associated with the selected IXP subsystem opens.

### *Creating configuration using Neptune Assistant*

1. Click **Add**  on Neptune Assistant list tool bar.

The Neptune assistant screen opens.

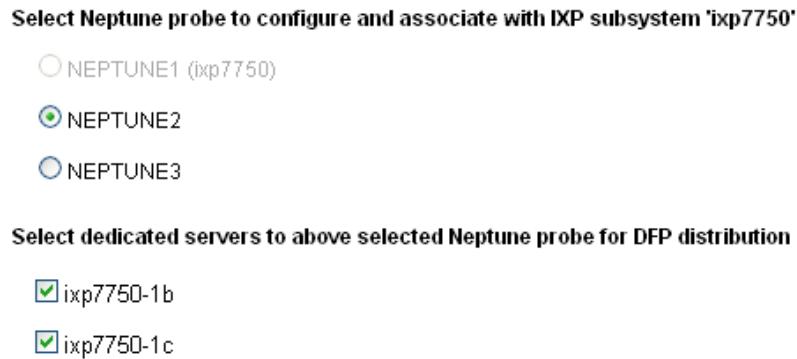


Figure 180: Neptune Assistant screen

2. Select Neptune probe to configure and associate with selected IXP subsystem
3. Select dedicated servers to selected Neptune probe for DFP distribution
4. Click **Create**  
All required IXP configuration elements to connect Neptune probe will be created.

#### ***IXP configuration elements creating by Neptune Assistant***

Neptune assistant will create configuration for CP and UP captures and also for traffic counters and TCPDR.

One external PDU stream will be created for each output on Neptune:

- 1 CP capture
- 1 traffic counters
- 1 TCPDR
- $N_1$  UP APN
- $N_2$  UP IMSI

Each external PDU stream will be created with type "NEPTUNE" and use probe capture IP, login and password.

The number of UP streams will be determine according to the number of selected IXP servers in Neptune Assistant. By default, the number of UP streams will be:

<b><i>Nb selected IXP servers</i></b>	1	2	3	4	5	6	7	8	9	...
<b><i>Nb UP APN streams</i></b>	1	1	2	3	5	6	8	9	10	10
<b><i>Nb UP IMSI streams</i></b>	1	1	2	4	5	7	8	10	10	10

TABLE 93: NEPTUNE ASSISTANT UP STREAMS ALLOCATION

The port and name will be assigned according to above Neptune capture configuration (see §3.2.1):

<b><i>Outputs</i></b>	<b><i>Port:ID</i></b>	<b><i>Name</i></b>
CP capture	56001:0	<Probe name>_CP
UP APN captures	56000:0 to 56000:9	<Probe name>_APN_<0-9>
UP IMSI captures	56000:10 to 56000:19	<Probe name>_IMSI_<10-19>
Traffic counter	56001:10	<Probe name>_UP_STAT
TCPDR	56001:11	<Probe name>_IPS<1-4>

TABLE 94: NEPTUNE ASSISTANT EXTERNAL PDU STREAMS

Each ouput will be connected to one build DFP (except IPS capture which is loadbalanced to 4 build DFPs by default).

Following final builders will be activated for build DFPs with output stream name set according to probe, input stream and final builder:

<b>Build DFP name</b>	<b>Final builders</b>	<b>Output stream name</b>
B_<Probe name>_APN_<0-9>	GRPS Gn//Gp TDR reconstitution IP DNS TDR IP FTP TDR reconstitution IP HTTP TDR reconstitution IP IMAP4 TDR reconstitution IP MMS TDR reconstitution IP MMS on WAPv2 TDR reconstitution IP POP3 TDR reconstitution IP RTSP TDR IP SMTP TDR reconstitution IP WAP TDR reconstitution IP WAP2 TDR reconstitution	O_<Probe name>_APN_<0-9>_GTP_TDR O_<Probe name>_APN_<0-9>_IP_DNS_TDR O_<Probe name>_APN_<0-9>_IP_FTP_TDR O_<Probe name>_APN_<0-9>_IP_HTTP_TDR O_<Probe name>_APN_<0-9>_IP_IMAP4_TDR O_<Probe name>_APN_<0-9>_IP_MMS_TDR O_<Probe name>_APN_<0-9>_IP_MMS_WAPv2_TDR O_<Probe name>_APN_<0-9>_IP_POP3_TDR O_<Probe name>_APN_<0-9>_IP_RTSP_TDR O_<Probe name>_APN_<0-9>_IP_SMTP_TDR O_<Probe name>_APN_<0-9>_IP_WAP_TDR O_<Probe name>_APN_<0-9>_IP_WAP2_TDR
B_<Probe name>_IMSI_<10-29>	GRPS Gn//Gp TDR reconstitution IP DNS TDR IP FTP TDR reconstitution IP HTTP TDR reconstitution IP IMAP4 TDR reconstitution IP MMS TDR reconstitution IP MMS on WAPv2 TDR reconstitution IP POP3 TDR reconstitution IP RTSP TDR IP SMTP TDR reconstitution IP WAP TDR reconstitution IP WAP2 TDR reconstitution	O_<Probe name>_IMSI_<10-19>_GTP_TDR O_<Probe name>_IMSI_<10-19>_IP_DNS_TDR O_<Probe name>_IMSI_<10-19>_IP_FTP_TDR O_<Probe name>_IMSI_<10-19>_IP_HTTP_TDR O_<Probe name>_IMSI_<10-19>_IP_IMAP4_TDR O_<Probe name>_IMSI_<10-19>_IP_MMS_TDR O_<Probe name>_IMSI_<10-19>_IP_MMS_WAPv2_TDR O_<Probe name>_IMSI_<10-19>_IP_POP3_TDR O_<Probe name>_IMSI_<10-19>_IP_RTSP_TDR O_<Probe name>_IMSI_<10-19>_IP_SMTP_TDR O_<Probe name>_IMSI_<10-19>_IP_WAP_TDR O_<Probe name>_IMSI_<10-19>_IP_WAP2_TDR
B_<Probe name>_UP_STAT	UP Transport TDR reconstitution UP Usage TDR reconstitution	O_<Probe name>_TRANPORT_STAT O_<Probe name>_USAGE_STAT
B_<Probe name>_CP	GRPS Gn//Gp TDR reconstitution	O_<Probe name>_CP_GTP_TDR
B_<Probe name>_IPS<1-4>	IP Sessions Summary TDR	O_<Probe name>_IPS<1-4>

For each probe, following sessions will be created:

```

<Probe name>_APN_GTP_TDR
<Probe name>_APN_IP_DNS_TDR
<Probe name>_APN_IP_FTP_TDR
<Probe name>_APN_IP_HTTP_TDR
<Probe name>_APN_IP_IMAP4_TDR
<Probe name>_APN_IP_MMS_TDR
<Probe name>_APN_IP_MMS_WAPv2_TDR
<Probe name>_APN_IP_POP3_TDR
<Probe name>_APN_IP_RTSP_TDR
<Probe name>_APN_IP_SMTP_TDR
<Probe name>_APN_IP_WAP_TDR
<Probe name>_APN_IP_WAP2_TDR
<Probe name>_IMSI_GTP_TDR
<Probe name>_IMSI_IP_DNS_TDR
<Probe name>_IMSI_IP_FTP_TDR
<Probe name>_IMSI_IP_HTTP_TDR
<Probe name>_IMSI_IP_IMAP4_TDR
<Probe name>_IMSI_IP_MMS_TDR
<Probe name>_IMSI_IP_MMS_WAPv2_TDR
<Probe name>_IMSI_IP_POP3_TDR
<Probe name>_IMSI_IP_RTSP_TDR
<Probe name>_IMSI_IP_SMTP_TDR
<Probe name>_IMSI_IP_WAP_TDR
<Probe name>_IMSI_IP_WAP2_TDR
<Probe name>_TRANPORT_STAT
<Probe name>_USAGE_STAT

```

<Probe name>\_CP\_GTP\_TDR  
 <Probe name>\_IPS<1-4>

One store DFP will be created for each session with as input stream the subset of output streams corresponding to associated final builder:

<i>Input streams</i>	<i>Session output</i>	<i>Store DFP name</i>
O_<Probe name>_APN_<0-9>_GTP_TDR	<Probe name>_APN_GTP_TDR	S_<Probe name>_APN_GTP_TDR
O_<Probe name>_APN_<0-9>_IP_DNS_TDR	<Probe name>_APN_IP_DNS_TDR	S_<Probe name>_APN_IP_DNS_TDR
O_<Probe name>_APN_<0-9>_IP_FTP_TDR	<Probe name>_APN_IP_FTP_TDR	S_<Probe name>_APN_IP_FTP_TDR
O_<Probe name>_APN_<0-9>_IP_HTTP_TDR	<Probe name>_APN_IP_HTTP_TDR	S_<Probe name>_APN_IP_HTTP_TDR
O_<Probe name>_APN_<0-9>_IP_IMAP4_TDR	<Probe name>_APN_IP_IMAP4_TDR	S_<Probe name>_APN_IP_IMAP4_TDR
O_<Probe name>_APN_<0-9>_IP_MMS_TDR	<Probe name>_APN_IP_MMS_TDR	S_<Probe name>_APN_IP_MMS_TDR
O_<Probe name>_APN_<0-9>_IP_MMS_WAPv2_TDR	<Probe name>_APN_IP_MMS_WAPv2_TDR	S_<Probe name>_APN_IP_MMS_WAPv2_TDR
O_<Probe name>_APN_<0-9>_IP_POP3_TDR	<Probe name>_APN_IP_POP3_TDR	S_<Probe name>_APN_IP_POP3_TDR
O_<Probe name>_APN_<0-9>_IP_RTSP_TDR	<Probe name>_APN_IP_RTSP_TDR	S_<Probe name>_APN_IP_RTSP_TDR
O_<Probe name>_APN_<0-9>_IP_SMTP_TDR	<Probe name>_APN_IP_SMTP_TDR	S_<Probe name>_APN_IP_SMTP_TDR
O_<Probe name>_APN_<0-9>_IP_WAP_TDR	<Probe name>_APN_IP_WAP_TDR	S_<Probe name>_APN_IP_WAP_TDR
O_<Probe name>_APN_<0-9>_IP_WAP2_TDR	<Probe name>_APN_IP_WAP2_TDR	S_<Probe name>_APN_IP_WAP2_TDR
O_<Probe name>_IMSI_<10-19>_GTP_TDR	<Probe name>_IMSI_GTP_TDR	S_<Probe name>_IMSI_GTP_TDR
O_<Probe name>_IMSI_<10-19>_IP_DNS_TDR	<Probe name>_IMSI_IP_DNS_TDR	S_<Probe name>_IMSI_IP_DNS_TDR
O_<Probe name>_IMSI_<10-19>_IP_FTP_TDR	<Probe name>_IMSI_IP_FTP_TDR	S_<Probe name>_IMSI_IP_FTP_TDR
O_<Probe name>_IMSI_<10-19>_IP_HTTP_TDR	<Probe name>_IMSI_IP_HTTP_TDR	S_<Probe name>_IMSI_IP_HTTP_TDR
O_<Probe name>_IMSI_<10-19>_IP_IMAP4_TDR	<Probe name>_IMSI_IP_IMAP4_TDR	S_<Probe name>_IMSI_IP_IMAP4_TDR
O_<Probe name>_IMSI_<10-19>_IP_MMS_TDR	<Probe name>_IMSI_IP_MMS_TDR	S_<Probe name>_IMSI_IP_MMS_TDR
O_<Probe name>_IMSI_<10-19>_IP_MMS_WAPv2_TDR	<Probe name>_IMSI_IP_MMS_WAPv2_TDR	S_<Probe name>_IMSI_IP_MMS_WAPv2_TDR
O_<Probe name>_IMSI_<10-19>_IP_POP3_TDR	<Probe name>_IMSI_IP_POP3_TDR	S_<Probe name>_IMSI_IP_POP3_TDR
O_<Probe name>_IMSI_<10-19>_IP_RTSP_TDR	<Probe name>_IMSI_IP_RTSP_TDR	S_<Probe name>_IMSI_IP_RTSP_TDR
O_<Probe name>_IMSI_<10-19>_IP_SMTP_TDR	<Probe name>_IMSI_IP_SMTP_TDR	S_<Probe name>_IMSI_IP_SMTP_TDR
O_<Probe name>_IMSI_<10-19>_IP_WAP_TDR	<Probe name>_IMSI_IP_WAP_TDR	S_<Probe name>_IMSI_IP_WAP_TDR
O_<Probe name>_IMSI_<10-19>_IP_WAP2_TDR	<Probe name>_IMSI_IP_WAP2_TDR	S_<Probe name>_IMSI_IP_WAP2_TDR
O_<Probe name>_TRANPORT_STAT	<Probe name>_TRANPORT_STAT	S_<Probe name>_TRANPORT_STAT
O_<Probe name>_USAGE_STAT	<Probe name>_USAGE_STAT	S_<Probe name>_USAGE_STAT
O_<Probe name>_CP_GTP_TDR	<Probe name>_CP_GTP_TDR	S_<Probe name>_CP_GTP_TDR
O_<Probe name>_IPS<1-4>	<Probe name>_IPS<1-4>	S_<Probe name>_IPS<1-4>

The distribution will be done evenly on all selected IXP servers.

External PDU streams and corresponding build DFPs will be distributed identically.

Here is the distribution preview of build DFPs and corresponding external DPU streams on IXP servers:

<i>Nb servers</i>	<i>Server 1</i>	<i>Server 2</i>	<i>Server 3</i>	<i>Server 4</i>	<i>Server 5</i>	<i>Server 6</i>	<i>Server 7</i>	<i>Server 8</i>	<i>Server 9</i>
<b>1</b>	4 IPS 1 CP 1 UP_STAT 1 APN 1 IMSI								
<b>2</b>	4 IPS	1 CP 1 UP_STAT 1 APN 1 IMSI							
<b>3</b>	4 IPS	1 CP 1 APN 1 IMSI	1 UP_STAT 1 APN 1 IMSI						
<b>4</b>	4 IPS	1 MA 1 APN 1 IMSI	1 UP_STAT 1 APN 1 IMSI	1 APN 2 IMSI					
<b>5</b>	4 IPS	1 MA 1 APN 1 IMSI	1 UP_STAT 1 APN 1 IMSI	2 APN 1 IMSI	1 APN 2 IMSI				
<b>6</b>	4 IPS	1 MA 1 APN 1 IMSI	1 UP_STAT 1 APN 1 IMSI	2 APN 1 IMSI	1 APN 2 IMSI				

<b>7</b>	4 IPS	1 MA 1 APN 1 IMSI	1 UP_STAT 1 APN 1 IMSI	2 APN 1 IMSI	2 APN 1 IMSI	1 APN 2 IMSI	1 APN 2 IMSI		
<b>8</b>	4 IPS	1 MA 1 APN 1 IMSI	1 UP_STAT 1 APN 1 IMSI	2 APN 1 IMSI	2 APN 1 IMSI	1 APN 2 IMSI	1 APN 2 IMSI		
<b>9</b>	4 IPS	1 MA 1 APN 1 IMSI	1 UP_STAT 1 APN 1 IMSI	2 APN 1 IMSI	2 APN 1 IMSI	2 APN 1 IMSI	1 APN 2 IMSI	1 APN 2 IMSI	1 APN 2 IMSI

Store DFPs are evenly distributed on all servers.

#### Overview of all IXP elements created:

<i>Input stream</i>	<i>Build DFP</i>	<i>xDR builder</i>	<i>Output stream</i>	<i>Store DFP</i>	<i>Session</i>
<Probe name>_APN_<0-9>	B_<Probe name>_APN_<0-9>	GRPS Gn//Gp TDR reconstitution	O_<Probe name>_APN_<0-9>_GTP_TDR	S_<Probe name>_APN_GTP_TDR	<Probe name>_APN_GTP_TDR
		IP DNS TDR	O_<Probe name>_APN_<0-9>_IP_DNS_TDR	S_<Probe name>_APN_IP_DNS_TDR	<Probe name>_APN_IP_DNS_TD R
		IP FTP TDR reconstitution	O_<Probe name>_APN_<0-9>_IP_FTP_TDR	S_<Probe name>_APN_IP_FTP_TDR	<Probe name>_APN_IP_FTP_TD R
		IP HTTP TDR reconstitution	O_<Probe name>_APN_<0-9>_IP_HTTP_TDR	S_<Probe name>_APN_IP_HTTP_TDR	<Probe name>_APN_IP_HTTP_T DR
		IP IMAP4 TDR reconstitution	O_<Probe name>_APN_<0-9>_IP_IMAP4_TDR	S_<Probe name>_APN_IP_IMAP4_TD R	<Probe name>_APN_IP_IMAP4_TDR
		IP MMS TDR reconstitution	O_<Probe name>_APN_<0-9>_IP_MMS_TDR	S_<Probe name>_APN_IP_MMS_TDR	<Probe name>_APN_IP_MMS_T DR
		IP MMS on WAPv2 TDR reconstitution	O_<Probe name>_APN_<0-9>_IP_MMS_WAPv2_TDR	S_<Probe name>_APN_IP_MMS_WAPv2_TDR	<Probe name>_APN_IP_MMS_W APv2_TDR
		IP POP3 TDR reconstitution	O_<Probe name>_APN_<0-9>_IP_POP3_TDR	S_<Probe name>_APN_IP_POP3_TDR	<Probe name>_APN_IP_POP3_TD R
		IP RTSP TDR	O_<Probe name>_APN_<0-9>_IP_RTSP_TDR	S_<Probe name>_APN_IP_RTSP_TDR	<Probe name>_APN_IP_RTSP_T DR
		IP SMTP TDR reconstitution	O_<Probe name>_APN_<0-9>_IP_SMTP_TDR	S_<Probe name>_APN_IP_SMTP_TDR	<Probe name>_APN_IP_SMTP_T DR
<Probe name>_IMSI_<10-19>	B_<Probe name>_IMSI_<10-19>	GRPS Gn//Gp TDR reconstitution	O_<Probe name>_IMSI_<10-19>_GTP_TDR	S_<Probe name>_IMSI_GTP_TDR	<Probe name>_IMSI_GTP_TDR
		IP DNS TDR	O_<Probe name>_IMSI_<10-19>_IP_DNS_TDR	S_<Probe name>_IMSI_IP_DNS_TDR	<Probe name>_IMSI_IP_DNS_TD R
		IP FTP TDR reconstitution	O_<Probe name>_IMSI_<10-19>_IP_FTP_TDR	S_<Probe name>_IMSI_IP_FTP_TDR	<Probe name>_IMSI_IP_FTP_TD R
		IP HTTP TDR reconstitution	O_<Probe name>_IMSI_<10-19>_IP_HTTP_TDR	S_<Probe name>_IMSI_IP_HTTP_TDR	<Probe name>_IMSI_IP_HTTP_T DR
		IP IMAP4 TDR reconstitution	O_<Probe name>_IMSI_<1019>_IP_IMAP4_TDR	S_<Probe name>_IMSI_IP_IMAP4_TD R	<Probe name>_IMSI_IP_IMAP4_TDR
		IP MMS TDR reconstitution	O_<Probe name>_IMSI_<10-19>_IP_MMS_TDR	S_<Probe name>_IMSI_IP_MMS_TDR	<Probe name>_IMSI_IP_MMS_T DR
		IP MMS on WAPv2 TDR reconstitution	O_<Probe name>_IMSI_<10-19>_IP_MMS_WAPv2_TDR	S_<Probe name>_IMSI_IP_MMS_WAPv2_TDR	<Probe name>_IMSI_IP_MMS_W APv2_TDR
		IP POP3 TDR reconstitution	O_<Probe name>_IMSI_<10-19>_IP_POP3_TDR	S_<Probe name>_IMSI_IP_POP3_TDR	<Probe name>_IMSI_IP_POP3_TD R
		IP RTSP TDR	O_<Probe name>_IMSI_<10-19>_IP_RTSP_TDR	S_<Probe name>_IMSI_IP_RTSP_TDR	<Probe name>_IMSI_IP_RTSP_T DR

		IP SMTP TDR reconstitution	O_<Probe name>_IMSI_<10-19>_IP_SMTP_TDR	S_<Probe name>_IMSI_IP_SMTP_TDR	<Probe name>_IMSI_IP_SMTP_TDR
		IP WAP TDR reconstitution	O_<Probe name>_IMSI_<10-19>_IP_WAP_TDR	S_<Probe name>_IMSI_IP_WAP_TDR	<Probe name>_IMSI_IP_WAP_TDR
		IP WAP2 TDR reconstitution	O_<Probe name>_IMSI_<10-19>_IP_WAP2_TDR	S_<Probe name>_IMSI_IP_WAP2_TDR	<Probe name>_IMSI_IP_WAP2_TDR
<Probe name>_UP_STAT	B_<Probe name>_UP_STAT	UP Transport stat	O_<Probe name>_TRANSPORT_STAT	S_<Probe name>_TRANPSORT_STAT	<Probe name>_TRANPORT_STAT
		UP Usage stat	O_<Probe name>_USAGE_STAT	S_<Probe name>_USAGE_STAT	<Probe name>_USAGE_STAT
<Probe name>_CP	B_<Probe name>_CP	GPRS Gn//Gp TDR reconstitution	O_<Probe name>_CP_GTP_TDR	S_<Probe name>_CP_GTP_TDR	<Probe name>_CP_GTP_TDR
<Probe name>_IPS<1-4>	B_<Probe name>_IPS<1-4>	IP Sessions Summary TDR	O_<Probe name>_IPS<1-4>	S_<Probe name>_IPS<1-4>	<Probe name>_IPS<1-4>

### **Neptune Assistant Advanced parameters**

It is possible to change default number of UP captures for APN and IMSI, and the default number of IPS loadbalancing.

#### **Advanced parameters**

Number of APN captures	<input type="text" value="1"/>
Number of IMSI captures	<input type="text" value="1"/>
IPS loadbalancing	<input type="text" value="4"/>

Figure 181: Neptune Assistant Advanced parameters

### **Deleting IXP configuration elements created by Neptune Assistant**

1. Select Neptune probe in Neptune Assistant list
2. Click **Delete**  in the tool bar.

All IXP configuration elements created by Neptune assistant will be deleted except sessions.

### **Neptune Assistant list tool bar**

Neptune assistant list provides also in the tool bar:



the possibility to directly open Neptune probe administration portal



the possibility to reset Neptune probe configuration

## **About Managing Dataflow Processings Manually**

Once you have created a dataflow processing, you can modify it manually or if you prefer, you can use this manual method if you want to create a specific Dataflow Processing. Dataflow Processings are categorized into three types:

1. Building - this Dataflow Processing creates or builds xDRs.
2. Operation - this Dataflow Processing generates statistics and applies filters.
3. Storage - this Dataflow Processing sends data to the IXP subsystem.

You can manually add xDR session types using CCM.

### **Adding an xDR dataflow processing session manually - Build**

The building dataflow processing correlates PDUs to create xDRs. This operation is done by one or more xDR builders that create a summary of the values of the signalling.

You can manually add a xDR Dataflow Processing Session by completing these steps:

1. Select **Mediation > Site > IXP > Subsystem > Dataflow Processings**.
2. Right-click on **Dataflow Processings**.

3. Select **Add** from the pop-up menu.  
The *Add* screen opens shown here.

Figure 182: Add Screen

4. Type in the **Name** of the Dataflow.
5. (Optional) Type in any **User Information**.
6. Select whether the dataflow is **active** or not.
7. Select the **Server** for the *Dataflow*.
8. (Optional) Select the **Retention Time** for the *Process*.
9. Select **Building**.

(The screen changes to show four more tabs.)

Figure 183: Dataflow Building Screen

10. Click **Next**.


The *Input PDUs* tab appears.

**Note:** If you select PDU Dataflows follow steps 11-12. If you select PDU Streams, go to step 13. You can also use both options.

#	PDU Dataflow Name	Type
1	CCM_BICC_DF	MSU
2	CCM_ETS1_ISUP_DF	MSU
3	DF1test	MSU
4	STCtoFC	MSU
5	mercury_sths1_1	MSU
6	CCM_SIP_DF	IP
7	FCT-328	SIGTRAN

Figure 184: Dataflow Input PDU Tab (PDU Dataflows selected)


11. Select the **Links** you want to use.
12. Select the **PDU Dataflows** you want to use.
13. (For legacy or external PDU streams) Select a **PDU Stream(s)** selection.

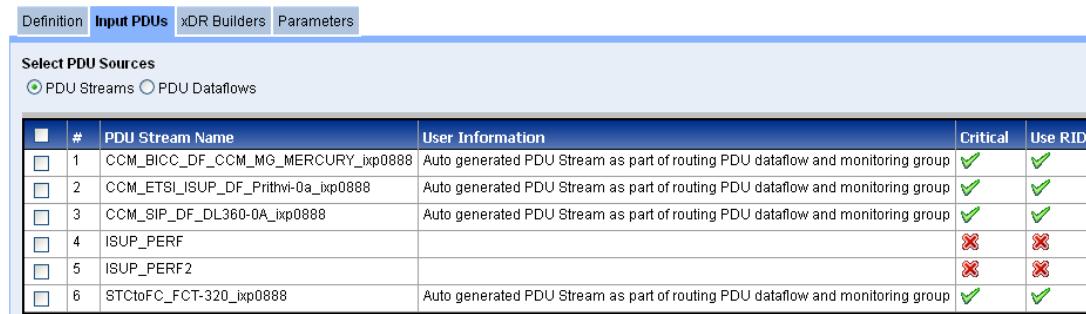

	#	PDU Stream Name	User Information	Critical	Use RID
<input type="checkbox"/>	1	CCM_BICC_DF_CCM_MG_MERCURY_ixp0888	Auto generated PDU Stream as part of routing PDU dataflow and monitoring group		
<input type="checkbox"/>	2	CCM_E1SLISUP_DF_Pritihi-0a_ixp0888	Auto generated PDU Stream as part of routing PDU dataflow and monitoring group		
<input type="checkbox"/>	3	CCM_SIP_DF_DL360-0A_ixp0888	Auto generated PDU Stream as part of routing PDU dataflow and monitoring group		
<input type="checkbox"/>	4	ISUP_PERF			
<input type="checkbox"/>	5	ISUP_PERF2			
<input type="checkbox"/>	6	STCtoFC_FCT-320_ixp0888	Auto generated PDU Stream as part of routing PDU dataflow and monitoring group		

Figure 185: Dataflow Input PDU Tab (PDU Dataflows selected)

14. Select the **PDU Stream Name(s)** to be used.
15. Click **Next** to open the xDR Builders tab.

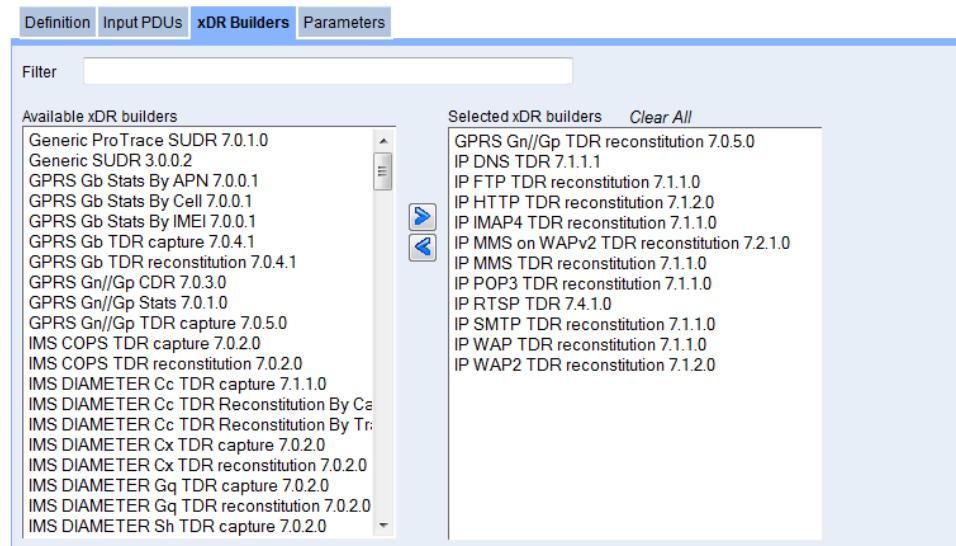


Available xDR builders	Selected xDR builders
Generic ProTrace SUDR 7.0.1.0	GPRS Gn/Gp TDR reconstitution 7.0.5.0
Generic SUDR 3.0.0	IP DNS TDR 7.1.1.1
GPRS Gb Stats By APN 7.0.0.1	IP FTP TDR reconstitution 7.1.2.0
GPRS Gb Stats By Cell 7.0.0.1	IP IMAP4 TDR reconstitution 7.1.1.0
GPRS Gb Stats By IMEI 7.0.0.1	IP MMS on WAPv2 TDR reconstitution 7.2.1.0
GPRS Gb TDR capture 7.0.4.1	IP MMS TDR reconstitution 7.1.1.0
GPRS Gb TDR reconstitution 7.0.4.1	IP POP3 TDR reconstitution 7.1.1.0
GPRS Gn/Gp CDR 7.0.3.0	IP RTSP TDR 7.4.1.0
GPRS Gn/Gp Stats 7.0.1.0	IP SMTP TDR reconstitution 7.1.1.0
GPRS Gn/Gp TDR capture 7.0.5.0	IP WAP TDR reconstitution 7.1.1.0
IMS COPS TDR capture 7.0.2.0	IP WAP2 TDR reconstitution 7.1.2.0
IMS COPS TDR reconstitution 7.0.2.0	
IMS DIAMETER Cc TDR capture 7.1.1.0	
IMS DIAMETER Cc TDR Reconstitution By Ca	
IMS DIAMETER Cc TDR Reconstitution By Tr	
IMS DIAMETER Cx TDR capture 7.0.2.0	
IMS DIAMETER Cx TDR reconstitution 7.0.2.0	
IMS DIAMETER Gq TDR capture 7.0.2.0	
IMS DIAMETER Gq TDR reconstitution 7.0.2.0	
IMS DIAMETER Sh TDR capture 7.0.2.0	

Figure 186: Xdr Builders Tab

16. Select one or more **xDR Builders** from Available list.
17. Click **Next** to open the Parameters tab shown below.

**Note:** Based on previously selected builders, CCM displays a series of screens to view and/or change each xDR Builder parameter value. Each xDR Builder selected has a unique set of parameters. The parameters are initialized with default values. For more information on configuring xDR builder parameters, refer to Appendix B, "xDR Builder Parameters,"

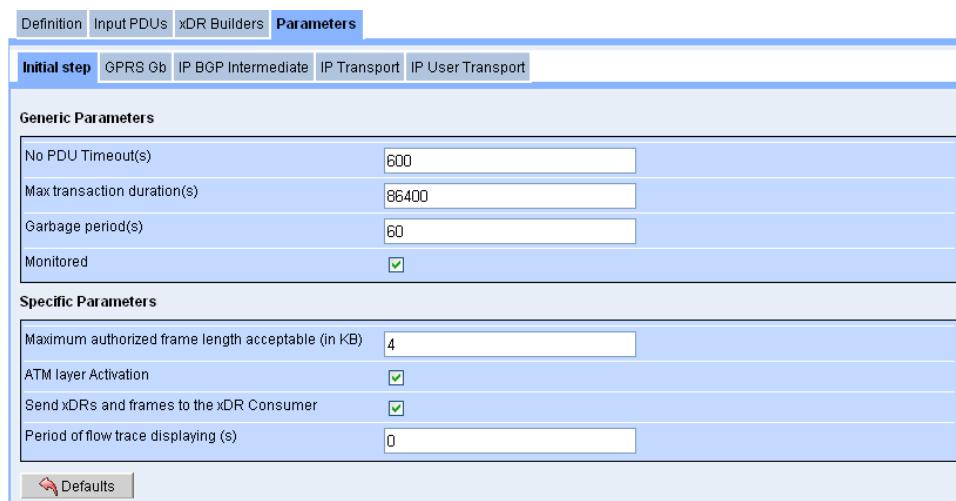

Initial step	GPRS Gb	IP BGP Intermediate	IP Transport	IP User Transport																
<b>Generic Parameters</b> <table border="1"> <tr> <td>No PDU Timeout(s)</td> <td>600</td> </tr> <tr> <td>Max transaction duration(s)</td> <td>86400</td> </tr> <tr> <td>Garbage period(s)</td> <td>60</td> </tr> <tr> <td>Monitored</td> <td><input checked="" type="checkbox"/></td> </tr> </table> <b>Specific Parameters</b> <table border="1"> <tr> <td>Maximum authorized frame length acceptable (in KB)</td> <td>4</td> </tr> <tr> <td>ATM layer Activation</td> <td><input checked="" type="checkbox"/></td> </tr> <tr> <td>Send xDRs and frames to the xDR Consumer</td> <td><input checked="" type="checkbox"/></td> </tr> <tr> <td>Period of flow trace displaying (s)</td> <td>0</td> </tr> </table>					No PDU Timeout(s)	600	Max transaction duration(s)	86400	Garbage period(s)	60	Monitored	<input checked="" type="checkbox"/>	Maximum authorized frame length acceptable (in KB)	4	ATM layer Activation	<input checked="" type="checkbox"/>	Send xDRs and frames to the xDR Consumer	<input checked="" type="checkbox"/>	Period of flow trace displaying (s)	0
No PDU Timeout(s)	600																			
Max transaction duration(s)	86400																			
Garbage period(s)	60																			
Monitored	<input checked="" type="checkbox"/>																			
Maximum authorized frame length acceptable (in KB)	4																			
ATM layer Activation	<input checked="" type="checkbox"/>																			
Send xDRs and frames to the xDR Consumer	<input checked="" type="checkbox"/>																			
Period of flow trace displaying (s)	0																			

Defaults

Figure 187: Parameters Tab (with SS7, GPRS, IP and Misc xDR Builders selected)

18. You can **modify** the default values of any parameter.

19. Click **Create**.

You must now **Apply Change** to save the changes to the subsystem.

#### About Partial xDRs

The Partial xDR feature in CCM is utilized by ProTrace for processing real-time traces on the SS7 ISUP ANSI, VoIP SIP-T ANSI CDR and VoIP SIP CDR protocols. Using the partial xDR feature you can configure in the build and store process.

**Note:** You must configure partial ANSI ISUP a dSIP-T/SIP xDRs manually using the build process.

**Note:** In addition, in configuring partial ANSI ISUP a dSIP-T/SIP xDRs you must also configure xDR filters so that partial and completed xDRs are written to the proper session.

#### Creating a Partial Build xDR for SS7 ISUP ANSI Protocol

Complete these steps to configure a partial build xDR for SS7 ISUP ANSI CDR reconstitution sessions that can be used by ProTrace for in-progress traces:

1. Select **Mediation > Site > Subsystem > Server > Dataflow Processing**.

The *Dataflow Processing* list page opens.

2. Click **Add** from the tool bar.

The *Add* screen opens.

Figure 188: Add Screen

3. Type in the **Name** of the Dataflow.

4. (Optional) Type in any **User Information**.

5. Select whether the dataflow is **active** or not.

6. Select the **Server** for the dataflow.

7. (Optional) Select the **Retention Time** for the process

8. Select **Building**.

(The screen changes to show four more tabs.)

Figure 189: Dataflow Building Screen

9. Click **Next**.

The *Input PDUs* tab appears.


**Note:** If you select *PDU Dataflows* follow steps 11-12. If you select *PDU Streams*, go to step 13. You can also use both options.



	#	PDU Dataflow Name	Type
<input type="checkbox"/>	1	CCM_BICC_DF	MSU
<input type="checkbox"/>	2	CCM_ETS1_ISUP_DF	MSU
<input type="checkbox"/>	3	DF1test	MSU
<input type="checkbox"/>	4	STCtoFC	MSU
<input type="checkbox"/>	5	mercury_sths1_1	MSU
<input type="checkbox"/>	6	CCM_SIP_DF	IP
<input type="checkbox"/>	7	FCT-328	SIGTRAN

Figure 190: Dataflow Input PDU Tab (PDU Dataflows selected)

10. Select the **Links** you want to use.
11. Select the **PDU Dataflows** you want to use.
12. (For legacy or external PDU streams) Select a **PDU Stream(s)** selection.

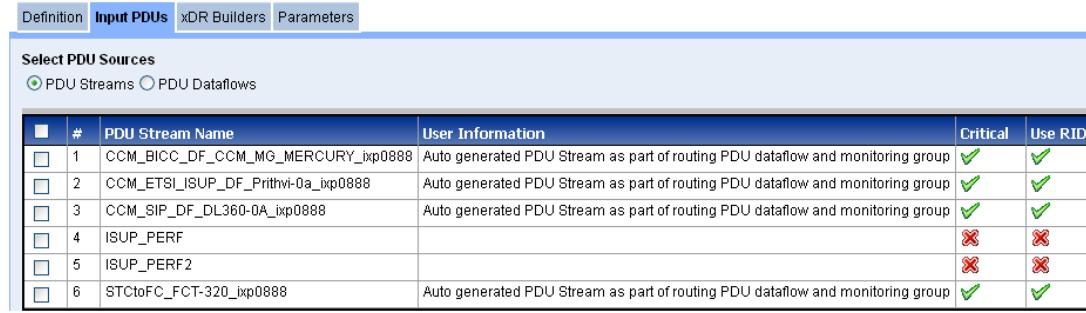

	#	PDU Stream Name	User Information	Critical	Use RID
<input type="checkbox"/>	1	CCM_BICC_DF_CCM_MG_MERCURY_ixp0888	Auto generated PDU Stream as part of routing PDU dataflow and monitoring group	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
<input type="checkbox"/>	2	CCM_ETS1_ISUP_DF_Pritivi-0a_ixp0888	Auto generated PDU Stream as part of routing PDU dataflow and monitoring group	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
<input type="checkbox"/>	3	CCM_SIP_DF_DL360-0A_ixp0888	Auto generated PDU Stream as part of routing PDU dataflow and monitoring group	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
<input type="checkbox"/>	4	ISUP_PERF		<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	5	ISUP_PERF2		<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	6	STCtoFC_FCT-320_ixp0888	Auto generated PDU Stream as part of routing PDU dataflow and monitoring group	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Figure 191: Input PDU Tab (PDU Streams selected if working with external PDU streams)

13. Select the **PDU Stream Name(s)** to be used.
14. Click **Next** to open the xDR Builders tab.



Figure 192: xDR Builders Tab

15. Select one or more **SS7 ISUP ANSI CDR Reconstruction** from Available list.
16. Click **Next** to open the Parameters tab shown below.

**Note:** Based on previously selected builders, CCM displays a series of screens to view and/or change each xDR Builder parameter value. Each xDR Builder selected has a unique set of parameters. The parameters are initialized with default values. For more information on configuring xDR builder parameters, refer to Appendix B, "xDR Builder Parameters,"



Figure 193: Parameters Tab Showing SS7 ISUP ANSI CDR Tab

17. Click **Create**.  
The *partial xDR* is created.

**Apply Changes** to the IXP subsystem. This partial xDR is now available for in-progress traces used in ProTrace

#### Creating a Partial xDR for SIP-T/SIP Protocol

Complete these steps to configure a partial build xDR for SS7 SIP-/SIP protocol that can be found in the VoIP SIP-T ANSI CDR reconstitution and VoIP SIP CDR reconstitution sessions used by ProTrace for in-progress traces:

1. Select **Mediation > Site > IXP > Subsystem > Dataflow Processings**.
2. Right-click on **Dataflow Processings**.
3. Select **Add** from the pop-up menu.  
The *Add* screen opens shown here.

Figure 194: Add Screen

4. Type in the **Name of the Dataflow**.
5. (Optional) Type in any **User Information**.
6. Select whether the dataflow is **active** or not.
7. Select the **Server** for the *Dataflow*.
8. (Optional) Select the **Retention Time** for the process
9. Select **Building**.

(The screen changes to show four more tabs.)

Figure 195: Dataflow Building Screen

10. Click **Next**.

The *Input PDUs* tab appears.

**Note:** If you select *PDU Dataflows* follow steps 11-12. If you select *PDU Streams*, go to step 13. You can also use both options.

#	PDU Dataflow Name	Type
1	CCM_BICC_DF	MSU
2	CCM_ETS1_ISUP_DF	MSU
3	DF1test	MSU
4	STCtoFC	MSU
5	mercury_sths1_1	MSU
6	CCM_SIP_DF	IP
7	FCT-328	SIGTRAN

Figure 196: Dataflow Input PDU Tab (PDU Dataflows selected)

11. Select the **Links** you want to use.
12. Select the **PDU Dataflows** you want to use.
13. Click **Next** to open the *xDR Builders* tab.

Select the *VoIP SIP*.

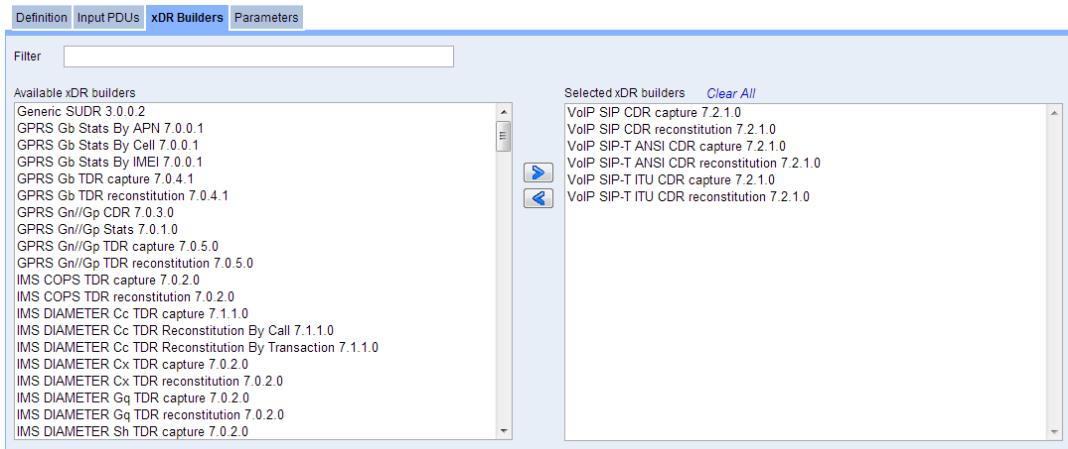


Figure 197: xDR Builders Tab with VOIP SIP Builders Selected

14. Select one or more **xDR Builders** from the four categories (SS7, IP, UMTS/GPRS or others).

**Note:** You can select multiple builders from one or more of the categories.

15. Click **Next** to open the *Parameters* tab shown below.

**Note:** Based on previously selected builders, CCM displays a series of screens to view and/or change each xDR Builder parameter value. Each xDR Builder selected has a unique set of parameters. The parameters are initialized with default values. For more information on configuring xDR builder parameters, refer to Appendix B, "xDR Builder Parameters,"

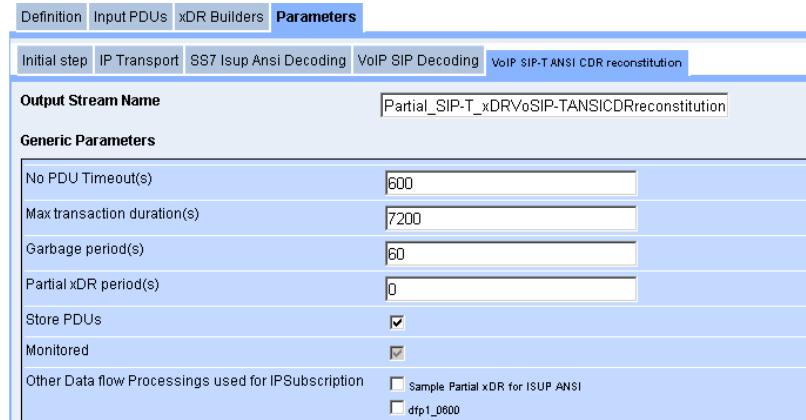


Figure 198: Parameters Tab with VoIP SIP-T ANSI CDR Tab

16. Select **Answer** (move to selected options field) from the CDR Partial section.

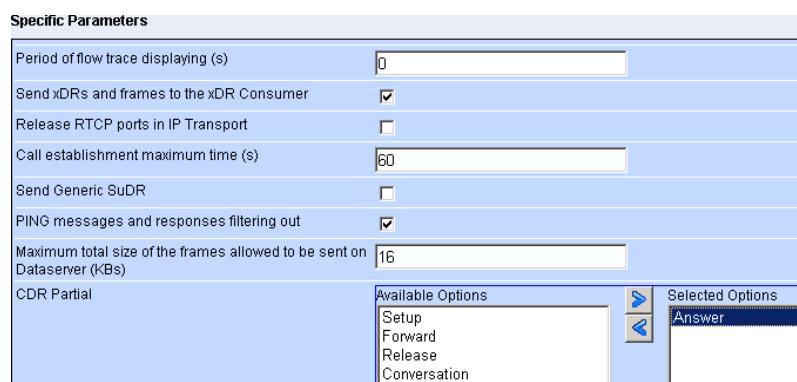


Figure 199: VoIP SIP with Answer selected

17. Click **Create**.

You must now **Apply Change** to save the changes to the subsystem.

## Configuring xDR Filters for Store Dataflow Partial xDRs

Partial xDRs for ANSI ISUP and SIP-T/SIP protocols that have been configured for "Answer" must have specifically configured xDR Filters for store Dataflows to handle partial and final (after call completion) xDRs. Complete these steps to configure an xDR Filter for partial xDR generation:

1. Select **Mediation > Site > IXP > Subsystem > Dataflow Processings**.
2. Right-click on **Dataflow Processings**.
3. Select **Add** from the pop-up menu.

The *Add* screen opens.

Figure 200: Add Screen

4. Enter the **Name of the Dataflow**.
5. (Optional) Enter any **User Information**.
6. Select whether the dataflow is **active** or not.
7. Select the **Server** for the *Dataflow*.
8. Select **Storage** for the *Processing Type*.
9. Enter the **Retention Time(s)** for the *DFP* (Default is 5 sec).
10. Enter the **Flush Time(s)** for the *DFP* (Default is 5 sec).
11. Click **Next**.

The list of *Input Streams* appears.

	#	Name	Critical	Description
<input type="checkbox"/>	1	B_TC_320_ansi_recon_129	✓	Created as the part of build dfp
<input type="checkbox"/>	2	B_CCM_SIP_CDRS_98	✓	Created as the part of build dfp
<input type="checkbox"/>	3	B_TC_320_ansi_capt_130	✓	Created as the part of build dfp
<input type="checkbox"/>	4	O_POOL_ISUP_PERF1_111	✓	Created for KPIs
<input type="checkbox"/>	5	K_Test_Stats_112	✓	Created for KPIs
<input type="checkbox"/>	6	B_TC_320_etsi_cap_131	✓	Created as the part of build dfp
<input type="checkbox"/>	7	test_sac_buildISUPANSICDRcapture	✓	Created as the part of build dfp
<input type="checkbox"/>	8	O_ixp0888PoolMonitor_89	✓	Created for KPIs
<input type="checkbox"/>	9	ixp0888PoolMonitor	✓	Created for PoolMonitor by ixp.

Figure 201: Input Streams Screen

12. Select the **Input Streams** to be used in the dataflow processing.

**Note:** You cannot select Input Streams that belong to different dictionaries. They must all belong to the same dictionary.

13. Click **Next**.

The *xDR Filter* screen appears.

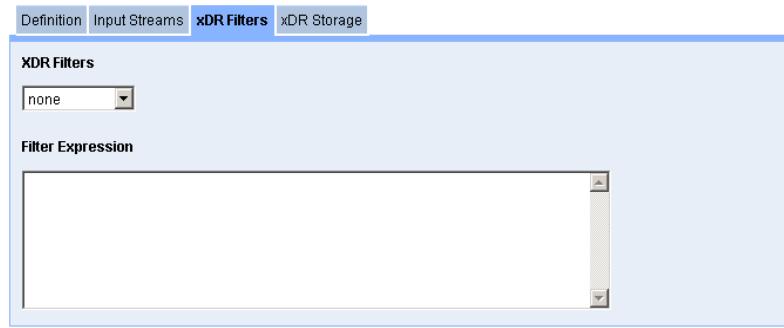


Figure 202: xDR Filter Screen

14. Select **Create Filter** from the drop-down menu.

The *Create New xDR Filter* opens.

A screenshot of the 'Create New xDR Filter' dialog box. It includes fields for 'Filter Name' and 'Description', a 'Dictionary' dropdown set to 'StoreMonitor' (grayed out), and a 'Filter Definition' table with columns for 'Condition', 'Operator', and 'Value'. At the bottom, there are buttons for 'Add' (highlighted in green), 'Delete', 'Reset', 'Cancel', and 'Create'.

Figure 203: xDR Filter Screen

15. Enter the **Filter Name**.

You can also enter a description. The dictionary has already been selected and is grayed out.

16. Click **Add** to add a condition.

Figure 204: xDR Filter Screen with condition

17. Select **Detailed Record Type** for field.
18. Select **=** for the operator.
19. Select **After Answer Partial xDR** for value.
20. Click **Create**.

The *filter* is created that allows all types of xDRs including Frame Alone xDRs and Circuit Message to be stored in the *Complete xDR Session* except the ones which are generated as Partial xDRs after Answer message.

21. Select or **Create a Session**.

Make sure the session lifetime is 24 hours.

**Note:** To configure flavor of session refer [Appendix D: Defining and Modifying Flavor \(PC Format\) of Session at CCM](#)

22. Click **Create** to create the *Storage DFP* with special filter.  
**Apply Changes** to the IXP subsystem for them to take effect.

#### ***Adding an xDR Dataflow Processing Session Manually - Operation***

You can manually add an operation xDR dataflow processing session by completing these steps:

**Note:** Before you create a Operate dataflow process, make sure that you have XdR input streams. These XDR input streams maybe the output of a previously created build dataflow process or a stream from another subsystem.

1. Select **Mediation > Site > IXP > Subsystem >Dataflow Processings**.
2. Right-click on **Dataflow Processings**.
3. Select **Add** from the pop-up menu.  
The *Add* screen opens shown here.

Mediation >  Sites >  IXP-SWIT >  IXP >  ixp0960 >  Dataflow Processings >  Add

---

**Definition** **Input Streams** **xDR Filters** **Output Stream** **Enrichment** **xDR Operation**

<b>Name</b>	Sample Operation DFP
<b>User Information</b>	This is an example of an Operation DFP
<b>Active</b>	<input checked="" type="checkbox"/>
<b>Server</b>	ixp0960-1c
<b>Processing Type</b>	<input type="radio"/> Building <input checked="" type="radio"/> Operation <input type="radio"/> Storage

Figure 205: Add Dataflow Processing Screen

4. Type in the **Name** of the *Dataflow*.
5. (Optional) Type in any **User Information**.
6. Select whether the dataflow is **active** or not.
7. Select the **Server** for the dataflow.
8. Select **Operation**.
9. Click **Next**.

The screen changes to show the *Input Streams* screen.

Definition > Input Streams > xDR Filters > Output Stream > Enrichment > xDR Operation				
Records/Page <input type="text" value="50"/>				Page 1/1
	Name	Critical	Description	
<input type="checkbox"/>	1 B_VoipMgcCap_010808_2	<input checked="" type="checkbox"/>	Created as the part of build dfp	
<input type="checkbox"/>	2 B_Sample_3	<input checked="" type="checkbox"/>	Created as the part of build dfp	
<input type="checkbox"/>	3 B_Sample1_4	<input checked="" type="checkbox"/>	Created as the part of build dfp	
<input type="checkbox"/>	4 B_Sample2_5	<input checked="" type="checkbox"/>	Created as the part of build dfp	
<input type="checkbox"/>	5 B_Sample3_6	<input checked="" type="checkbox"/>	Created as the part of build dfp	
<input type="checkbox"/>	6 B_ss7IsupAnsCap_010808_1	<input checked="" type="checkbox"/>	Created as the part of build dfp	
<input type="checkbox"/>	7 ixp0960StreamMonitor	<input checked="" type="checkbox"/>	Created for StreamMonitor by ixp.	
<input type="checkbox"/>	8 ixp0960BuildMonitor	<input checked="" type="checkbox"/>	Created for BuildMonitor by ixp.	
<input type="checkbox"/>	9 ixp0960OperateMonitor	<input checked="" type="checkbox"/>	Created for OperateMonitor by ixp.	

Figure 206: IP Streams Screen

10. Select the **Input Streams** you want.

**Note:** What you select will be the outputs of the build data process that have been created.

**11. Click **Next**.**

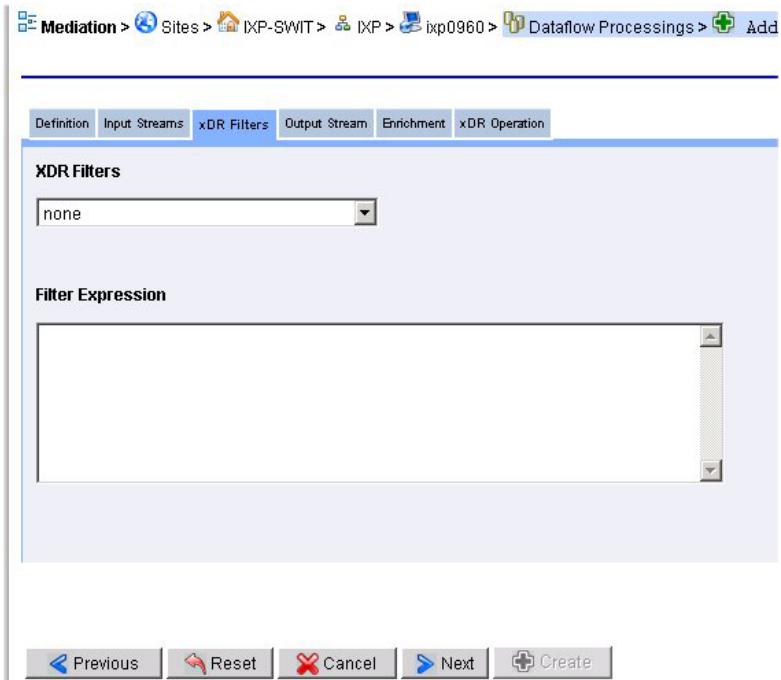


Figure 207: Xdr Filters Screen

12. Select an **xDR Filter** from the pull-down list.

The *Filter Expression* is shown in the field below.

**Note:** You can also select Create a new xDR Filter from the pull-down list. See [Creating an xDR Session for a Dataflow Processing](#) for more information.

13. Click **Next**.

The *Output Stream* screen opens shown below.

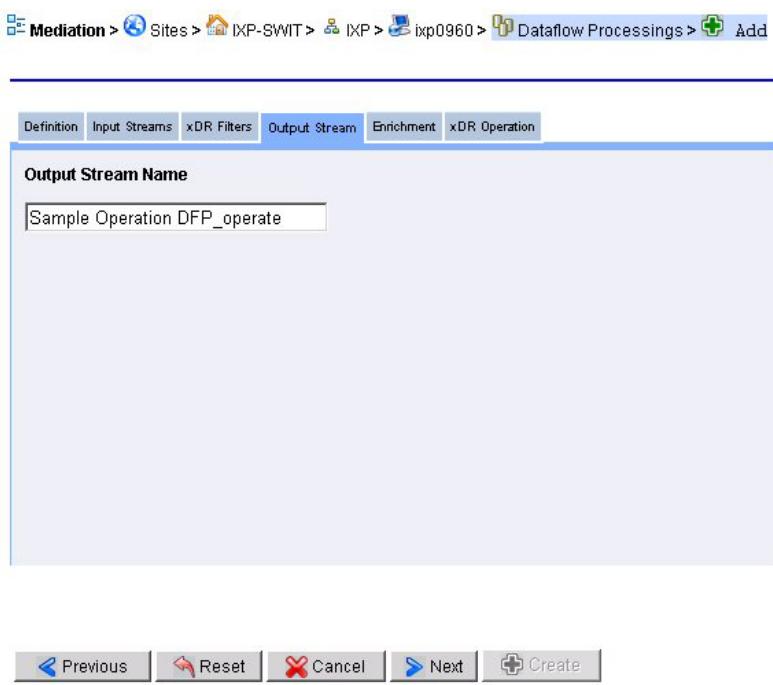


Figure 208: Output Steams Screen

14. (Optional) Modify the **Output Stream Name** from the default name.

15. Click **Next** the *Enrichment* screen opens shown below.

**Note:** This screen is used exclusively for the IXP xDR static or dynamic enrichment option. The output xDRs from can have extra user-defined fields that are updated by IxpOperate using user-defined mapping tables in \*.fse files, and are used by ProTraq. However, the new fields must be defined in a dictionary, referred to as an enriched dictionary. The Partial ASCII dictionary files (\*.a7d) having only the user-defined enriched fields are modified manually and can be loaded into NSP by using the dictionary upload screen. These partial dictionaries can be selected and applied to the base builder dictionary to create the complete enriched dictionary. This created enriched dictionary can be then selected from Output Format list.

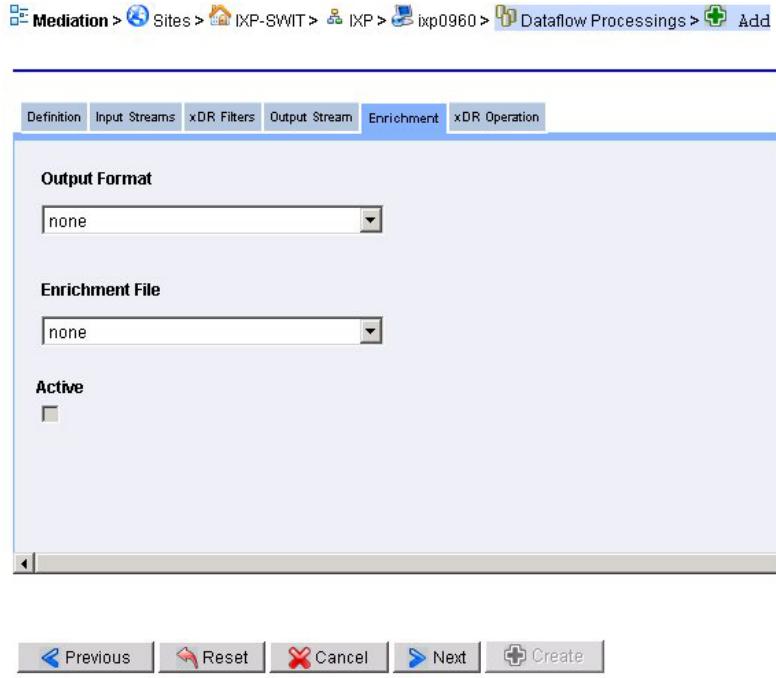


Figure 209: Enrichment Screen

16. (Optional) *Create an Enrichment Record.*

- Output Format** - Select an existing enriched dictionary or select option to upload a new format. Tool tip will display the name for base builder dictionary and the partial dictionary for each enriched dictionary in the list.

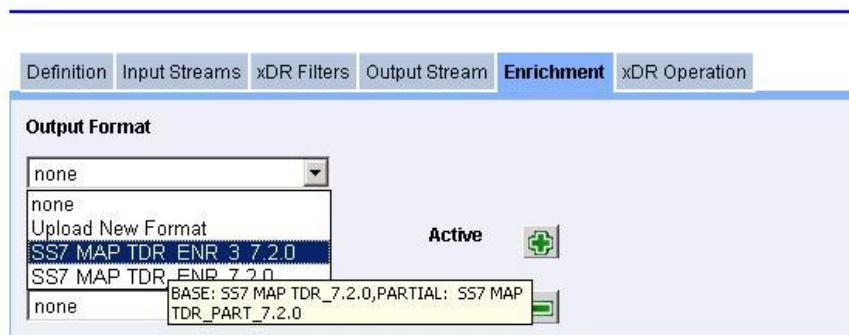


Figure 210: Output Format List

- On selecting option to upload a new format, a new pop-up window opens displaying the list of partial dictionaries. Existing partial dictionary can be selected or a new partial dictionary can be uploaded.

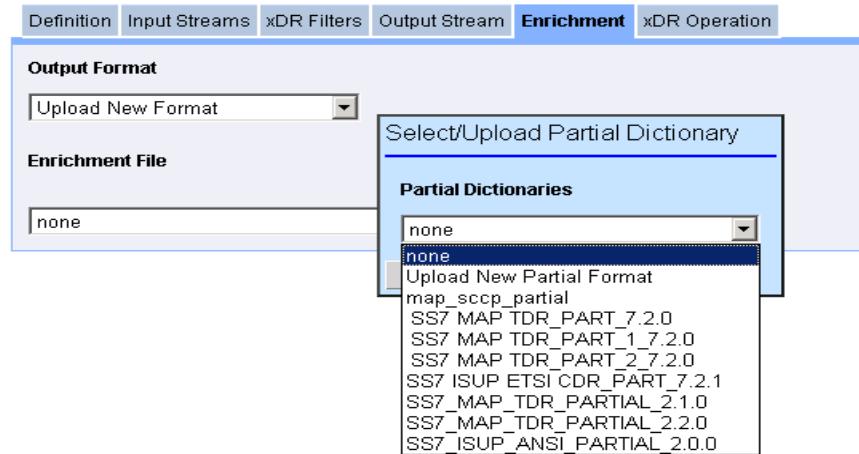


Figure 211: Select/Upload Partial Dictionary

- c. On selecting option to "Upload New Partial Format", a new pop-up window opens. A partial dictionary can be uploaded from this window. The uploaded partial dictionary can be selected from the list.

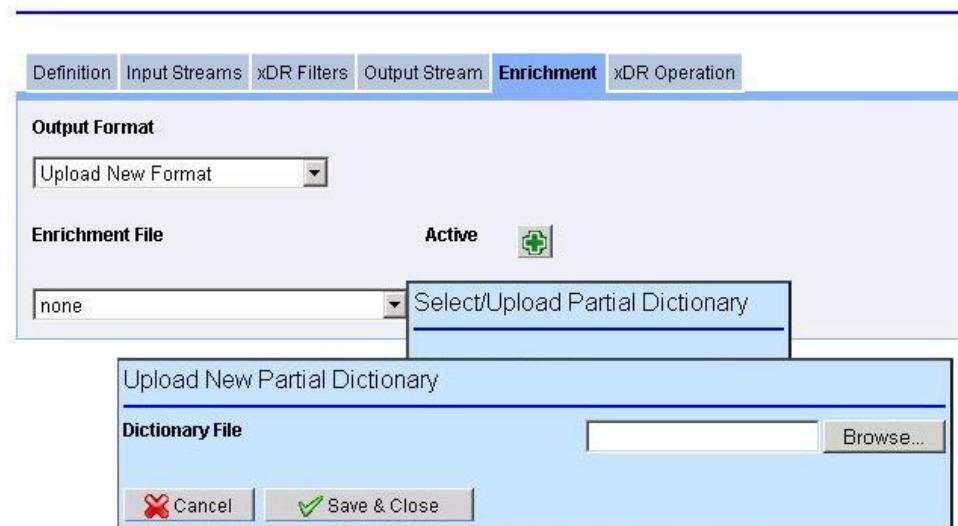


Figure 212: Upload New Partial Dictionary

- d. The selected partial dictionary is applied to the base builder dictionary to create the complete enriched dictionary. The created enriched dictionary is then selected as Output format.

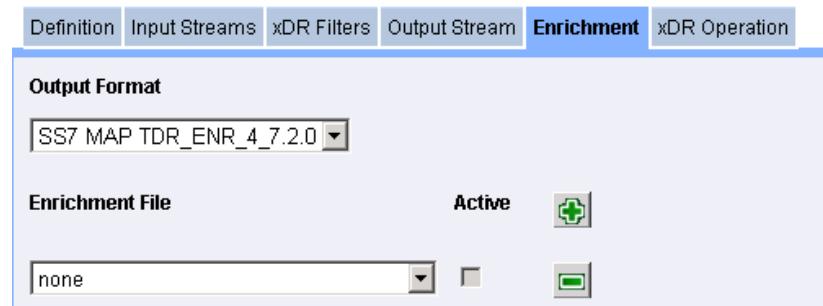


Figure 213: Created Enriched Dictionary

- e. Select an **Enrichment File**.
- f. (Optional) Select if the enrichment is **Active** or not.  
(*Active* means that the enrichment will happen on this dataflow.)

17. Click **Next**.

The *xDR Operation* screen opens shown below.

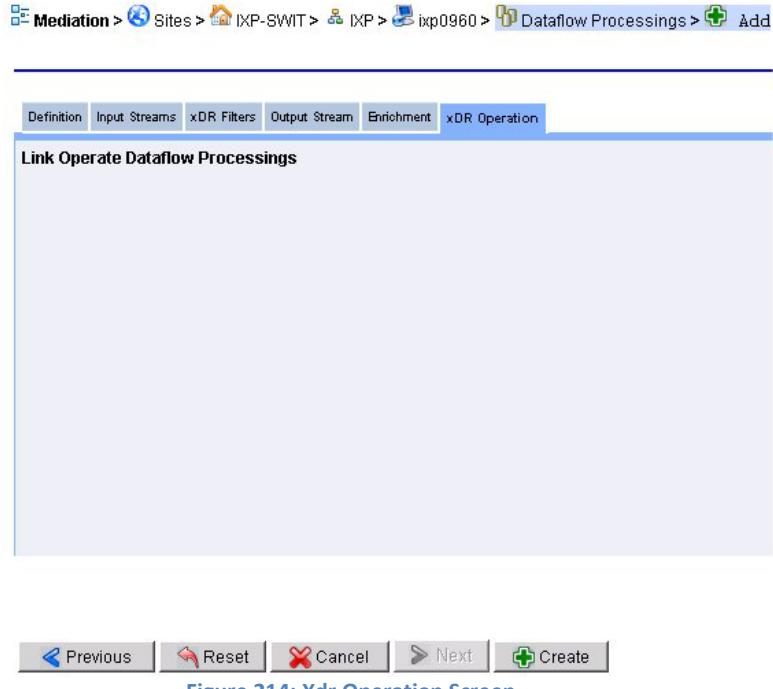


Figure 214: Xdr Operation Screen

18. Select a **link(s)** for the *Operate Dataflow Processings* (not shown here)
19. Click **Create**.

**Note:** You must **Apply** these configurations to the IXP subsystem for these configurations be used in the system.

#### ***Adding an xDR Dataflow Processing Session Manually - Storage***

You can manually add a storage xDR dataflow procession session by completing these steps:

1. Select **Mediation > Site > IXP > Subsystem > Dataflow Processings**.
2. Right-click on **Dataflow Processings**.
3. Select **Add** from the pop-up menu.


The *Add* screen opens.

Figure 215: Xdr Operation Screen

4. Enter the **Name** of the *Dataflow*.

5. (Optional) Enter any **User Information**.
6. Select whether the dataflow is **active** or not.
7. Select the **Server** for the *Dataflow*.
8. Select **Storage** for the *Processing Type*.
9. Enter the **Retention Time(s)** for the *DFP* (Default is 5 sec).
10. Enter the **Flush Time(s)** for the *DFP* (Default is 5 sec).
11. Click **Next**.

The list of *Input Streams* appears.

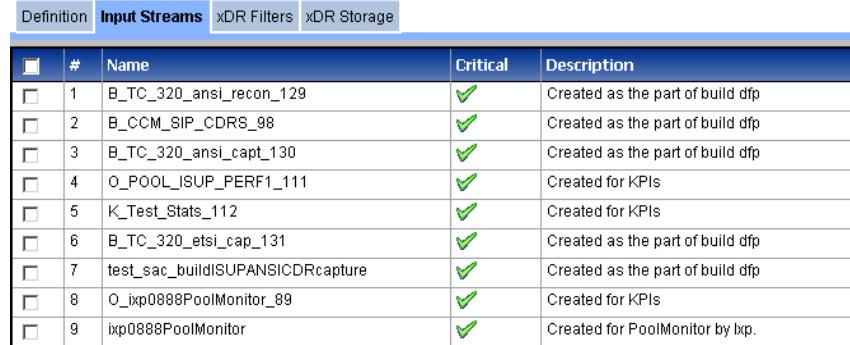

	#	Name	Critical	Description
<input type="checkbox"/>	1	B_TC_320_ansi_recon_129	✓	Created as the part of build dfp
<input type="checkbox"/>	2	B_CCM_SIP_CDRS_98	✓	Created as the part of build dfp
<input type="checkbox"/>	3	B_TC_320_ansi_capt_130	✓	Created as the part of build dfp
<input type="checkbox"/>	4	O_POOL_ISUP_PERF1_111	✓	Created for KPIs
<input type="checkbox"/>	5	K_Test_Stats_112	✓	Created for KPIs
<input type="checkbox"/>	6	B_TC_320_etsi_cap_131	✓	Created as the part of build dfp
<input type="checkbox"/>	7	test_sac_buildISUPANSICDRcapture	✓	Created as the part of build dfp
<input type="checkbox"/>	8	O_ixp0888PoolMonitor_89	✓	Created for KPIs
<input type="checkbox"/>	9	ixp0888PoolMonitor	✓	Created for PoolMonitor by ixp.


Figure 216: Input Streams Screen

12. Select the **Input Streams** to be used in the *Dataflow Processing*.

**Note:** You cannot select *Input Streams* that belong to different dictionaries. They must all belong to the same dictionary.

13. Click **Next**.

The *xDR Filter* screen appears.

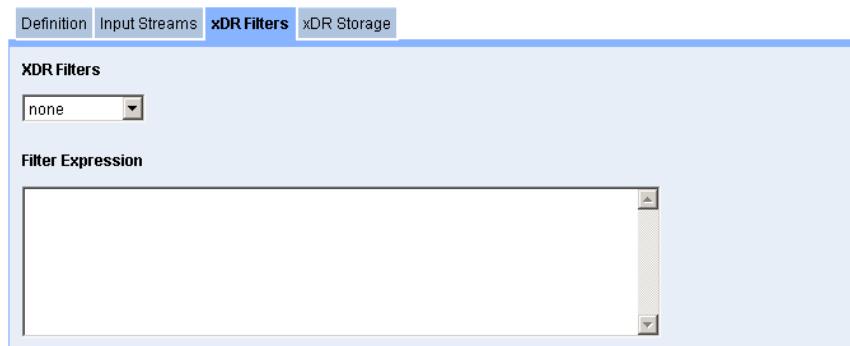

The screen shows a header with tabs: Definition, Input Streams, xDR Filters, and xDR Storage. The xDR Filters tab is selected. Below the tabs, there is a section titled 'XDR Filters' with a dropdown menu showing 'none'. Below that is a section titled 'Filter Expression' containing a large empty text area with scroll bars.

Figure 217: xDR Filter Screen


14. Select the **xDR Filter** to be applied to the *Dataflow Processing*.

The *Filter Expression* appears in the field at the bottom of the screen.

**Note:** You can also select **Create Filter** from the pull-down list.

15. Click **Next**.

The *xDR Storage* screen appears.



The screen shows a header with tabs: Definition, Input Streams, xDR Filters, and xDR Storage. The xDR Storage tab is selected. Below the tabs, there are two dropdown menus: 'Storage Type' (set to 'Datawarehouse') and 'XDR Sessions' (set to 'Select Session').

Figure 218: xDR Storage Screen

16. **Select Storage Type**

Select Storage Type as Datawarehouse in the Storage Type drop down list box.

## 17. Select or Create a Session.

**Note:** A list of existing xDR Sessions based on the dictionaries that are associated with the previously selected xDR input streams is provided.

Note: If Session Point Code Feature is enabled then to configure flavor of session refer [Appendix D: Defining and Modifying Flavor \(PC Format\) of Session at CCM](#)

18. Click **Create**.

The *Storage Dataflow Processing* is created. You are now prompted to **Synchronize** the subsystem to save the changes.

***Adding an xDR Dataflow Processing Feed Manually – Storage ( DataBroker)***

You can manually add a storage xDR dataflow procession session ( DataBroker) by completing these steps:

1. Select **Mediation > Site > IXP > Subsystem >Dataflow Processings**.

2. Right-click on **Dataflow Processings**.

3. Select **Add** from the pop-up menu.

The *Add* screen opens.

Figure 219: Xdr Definition Screen

4. Enter the **Name** of the *Dataflow*.

5. (Optional) Enter any **User Information**.

6. Select whether the dataflow is **active** or not.

7. Select the **Server** for the *Dataflow*.

8. Select **Storage** for the **Processing Type**.

9. Enter the **Retention Time(s)** for the *DFP* (Default is 5 sec).

10. Enter the **Flush Time(s)** for the *DFP* (Defalt is 5 sec).

11. Click **Next**.

The list of *Input Streams* appears.

Input Streams				
#	Name	Critical	Description	
1	B_TC_320_ansi_recon_129	✓	Created as the part of build dfp	
2	B_CCM_SIP_CDRS_98	✓	Created as the part of build dfp	
3	B_TC_320_ansi_capt_130	✓	Created as the part of build dfp	
4	O_POOL_ISUP_PERF1_111	✓	Created for KPIs	
5	K_Test_Stats_112	✓	Created for KPIs	
6	B_TC_320_etsi_cap_131	✓	Created as the part of build dfp	
7	test_sac_buildISUPANSICDRcapture	✓	Created as the part of build dfp	
8	O_ixp0888PoolMonitor_89	✓	Created for KPIs	
9	ixp0888PoolMonitor	✓	Created for PoolMonitor by Ixp.	

Figure 220:Input Stream Screen

12. Select the **Input Streams** to be used in the *Dataflow Processing*.

**Note:** Input Stream must be selected for the DataBroker Builder. If the input stream selected is not from DataBroker Builder then this ( DataBroker Storage Feed) Store DFP will not be available under XdrStorage Tab and hence it can't be created.

13. Click **Next**.

The *xDR Filter* screen appears.

Figure 221: Xdr Filter Screen

14. Select the **xDR Filter** to be applied to the *Dataflow Processing*.

The *Filter Expression* appears in the field at the bottom of the screen.

**Note:** You can also select **Create Filter** from the pull-down list.

15. Click **Next**.

The *xDR Storage* screen appears.

Figure 222: xDR Storage Screen

16. Select The Storage Type

Select *DataBroker* As the Storage Type in the Storage Type Drop Down. The Default Parameters for DataBroker Storage Feed are loaded.

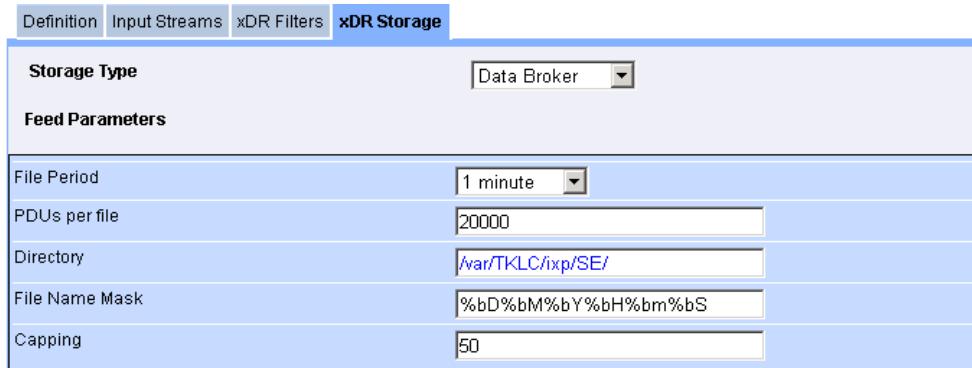


Figure 223: xDR Storage Screen

### 17. Enter DataBroker Parameters

**File Period:** Select File Period value from the List Box. Possible Values are 20 Seconds, 30 seconds, 1 Minute, 5 Minutes, 10 Minutes, 15 Minutes, 1 hour

**PDUs Per File:** This parameter denotes maximum number of PDUs per DataBroker File if File Period is not reached. Default Value is 20000. Possible Values are in Range 1000 – 1000000

**Directory:** This parameter denotes the relative directory on IXP from the Customer mounted NFS Directory where the files will be generated. Possible values are any valid path String starting with /.

**File Name Mask:** This parameter denotes the file Name Pattern of the DataBroker output file. Default pattern for DataBroker Type Feed is "%bD%bM%bY%bH%bm%bS". Enter valid file pattern or use the Default File Name Pattern

A file name mask is a text string made of figures, letters, “\_” and “-”; except “%”, no other character is allowed. If a “%” character is encountered, it must be followed by any of:

- “LT”: can only be at the first place; means that the date fields have to be converted to local time zone (as defined in the operating system)
- “bD”: day in the month (2 digits, 01 to 31) of the beginning of the file period
- “bM”: month (2 digits, 01 to 12) of the beginning of the file period
- “bY”: year (4 digits) of the beginning of the file period
- “bH”: hours (2 digits, 00 to 23) of the beginning of the file period
- “bh”: hours (2 digits, 01 to 12) of the beginning of the file period
- “bA”: “AM” or “PM” of the hour of the beginning of the file period
- “bm”: minutes (2 digits, 00 to 59) of the beginning of the file period
- “bS”: seconds (2 digits, 00 to 59) of the beginning of the file period
- “eD”: day in the month (2 digits, 01 to 31) of the end of the file period
- “eM”: month (2 digits, 01 to 12) of the end of the file period
- “eY”: year (4 digits) of the end of the file period

- “eH”: hours (2 digits, 00 to 23) of the end of the file period
- “eh”: hours (2 digits, 01 to 12) of the end of the file period
- “eA”: “AM” or “PM” of the hour of the end of the file period
- “em”: minutes (2 digits, 00 to 59) of the end of the file period
- “eS”: seconds (2 digits, 00 to 59) of the end of the file period

E.g.- With Default File Name Mask (%bD%bM%bY%bH%bm%bS), the file generated on 05<sup>th</sup> October 2012 ( 11:15 am) at could be 05102012111500

**Capping:** This parameter denotes the Output Capping in Mbps. Default Values is 50 and possible Values are in the range 1-999. ( This Field could be left empty )

18. Click **Create**.

The *Storage Dataflow Processing* is created. You are now prompted to **Synchronize** the subsystem to save the changes

**Adding an xDR Dataflow Processing Feed Manually - Storage ( CSV Streaming)**

**Note:** To Create This Type of Storage Dataflow Processing CSV license must be enabled otherwise the option to choose this type of Store DFP will not be available in the wizard.

You can manually add a storage xDR dataflow processing ( CSV ) by completing these steps:

1. Select **Mediation > Site > IXP > Subsystem >Dataflow Processings**.
2. Right-click on **Dataflow Processings**.
3. Select **Add** from the pop-up menu.

The *Add* screen opens.


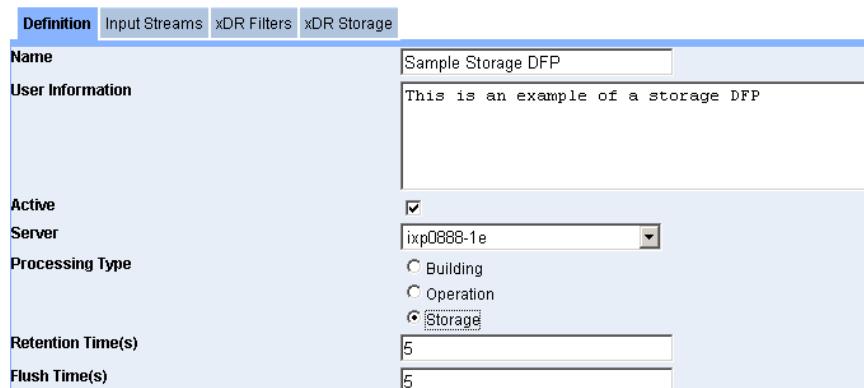


Figure 224: xDR Operation Screen

4. Enter the **Name** of the *Dataflow*.
5. (Optional) Enter any **User Information**.
6. Select whether the dataflow is **active** or not.
7. Select the **Server** for the *Dataflow*.
8. Select **Storage** for the *Processing Type*.
9. Enter the **Retention Time(s)** for the *DFP* (Default is 5 sec).
10. Enter the **Flush Time(s)** for the *DFP* (Defalt is 5 sec).
11. Click **Next**.

The list of *Input Streams* appears.

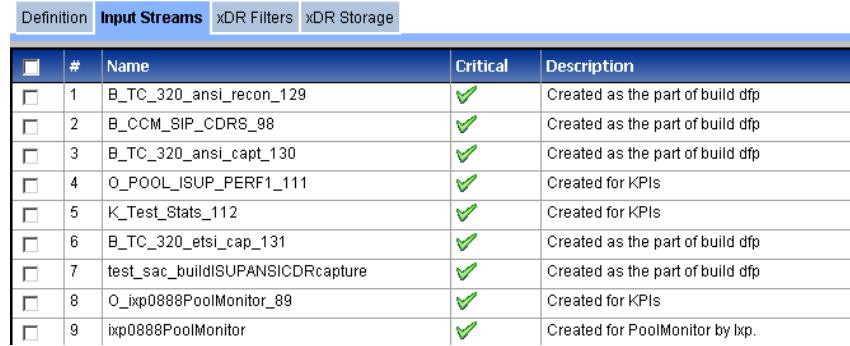

	#	Name	Critical	Description
<input type="checkbox"/>	1	B_TC_320_ansi_recon_129	✓	Created as the part of build dfp
<input type="checkbox"/>	2	B_CCM_SIP_CDRS_98	✓	Created as the part of build dfp
<input type="checkbox"/>	3	B_TC_320_ansi_capt_130	✓	Created as the part of build dfp
<input type="checkbox"/>	4	O_POOL_ISUP_PERF1_111	✓	Created for KPIs
<input type="checkbox"/>	5	K_Test_Stats_112	✓	Created for KPIs
<input type="checkbox"/>	6	B_TC_320_etsi_cap_131	✓	Created as the part of build dfp
<input type="checkbox"/>	7	test_sac_buildISUPANSICDRcapture	✓	Created as the part of build dfp
<input type="checkbox"/>	8	O_ixp0888PoolMonitor_89	✓	Created for KPIs
<input type="checkbox"/>	9	ixp0888PoolMonitor	✓	Created for PoolMonitor by Ixp.


Figure 225: Input Streams Screen

12. Select the **Input Streams** to be used in the *Dataflow Processing*.

**Note:** You cannot select *Input Streams* that belong to different dictionaries. They must all belong to the same dictionary.

13. Click **Next**.

The *xDR Filter* screen appears.

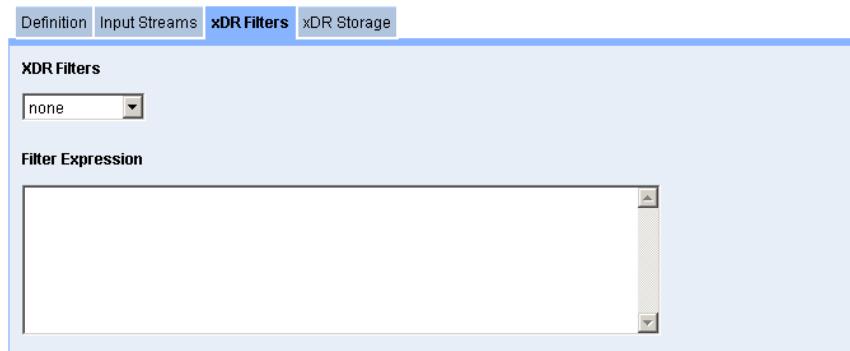

**XDR Filters**  
none

**Filter Expression**

Figure 226: xDR Filter Screen

14. Select the **xDR Filter** to be applied to the *Dataflow Processing*.

The *Filter Expression* appears in the field at the bottom of the screen.

**Note:** You can also select **Create Filter** from the pull-down list.

15. Click **Next**.

The *xDR Storage* screen appears.



**Storage Type** Datawarehouse

**XDR Sessions** Select Session

Figure 227: xDR Storage Screen

16. Select The Storage Type

Select **CSV** As the Storage Type in the Storage Type Drop Down. Then the parameters for this type of Storage DFP are loaded with default values.

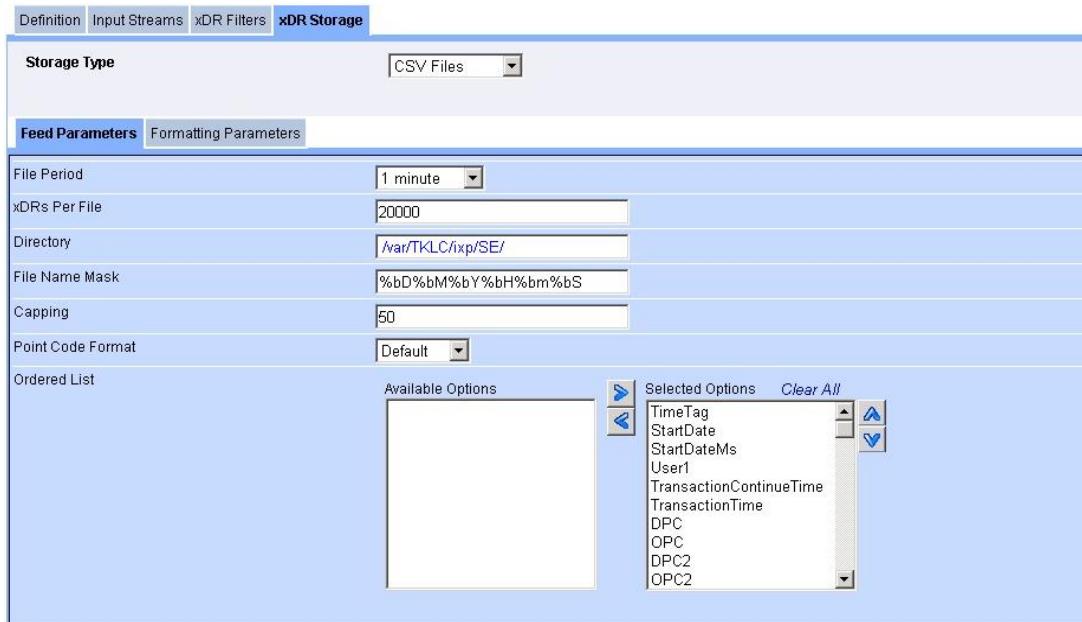


Figure 228: xDR Storage Screen

## 17. Enter the Parameters

### a. Enter Feed Parameters

**File Period:** Select File Period value from the List Box. Possible Values are *20 Seconds, 30 seconds, 1 Minute, 5 Minutes, 10 Minutes, 15 Minutes, 1 hour*

**XDRs Per File:** This parameter denotes maximum number of xDRs per CSV File if File Period is not reached. Default Value is 20000. Possible Values are in Range *1000 – 1000000*

**Directory:** This parameter denotes the directory relatively to /var/TKLC/ixp/StoreExport on IXP from the Customer mounted NFS Directory where the files will be generated. Possible values are any valid path String starting with /. Please refer to Appendix H: CSV streaming feed to get more details on how to use this feature.

**File Name Mask:** This parameter denotes the file Name Pattern of the CSV output file. Default pattern for CSV Type Feed is "%bD%bM%bY%bH%bm%bS-%eD%eM%eY%eH%em%eS". Enter valid file pattern or use the Default File Name Pattern

A file name mask is a text string made of figures, letters, “\_” and “-”; except “%”, no other character is allowed. If a “%” character is encountered, it must be followed by any of:

- “LT”: can only be at the first place; means that the date fields have to be converted to local time zone (as defined in the operating system)
- “bD”: day in the month (2 digits, 01 to 31) of the beginning of the file period
- “bM”: month (2 digits, 01 to 12) of the beginning of the file period
- “bY”: year (4 digits) of the beginning of the file period
- “bH”: hours (2 digits, 00 to 23) of the beginning of the file period
- “bh”: hours (2 digits, 01 to 12) of the beginning of the file period
- “bA”: “AM” or “PM” of the hour of the beginning of the file period

- “bm”: minutes (2 digits, 00 to 59) of the beginning of the file period
- “bS”: seconds (2 digits, 00 to 59) of the beginning of the file period
- “eD”: day in the month (2 digits, 01 to 31) of the end of the file period
- “eM”: month (2 digits, 01 to 12) of the end of the file period
- “eY”: year (4 digits) of the end of the file period
- “eH”: hours (2 digits, 00 to 23) of the end of the file period
- “eh”: hours (2 digits, 01 to 12) of the end of the file period
- “eA”: “AM” or “PM” of the hour of the end of the file period
- “em”: minutes (2 digits, 00 to 59) of the end of the file period
- “eS”: seconds (2 digits, 00 to 59) of the end of the file period

E.g.- With Default File Name Mask (%bD%bM%bY%bH%bm%bS-%eD%eM%eY%eH%em%eS), the file generation started at 05th October 2012 ( 11:15 am) and ended on 05th October 2012 ( 11:30 am) at could be 05102012111500-05102012113000

**Capping:** This parameter denotes the Output Capping in Mbps. Default Values is 50 and possible Values are in the range 1-999. ( This Field could be left empty )

**Point Code Format:** This parameter denotes the point code flavor. You can select one of following values *Default, ANSI, ETSI\_I, ETSI\_N, Chinese, Japanese*

**Ordered List:** You can define the ordering of the fields from dictionary. Then the output CSV Files should maintain the order specified in this parameter. Some Dictionary Fields could be deselected while creating Storage DFP. Select and Move the fields using Left Arrow Button from *Selected Options* to *Available Options* if you don't want to keep the fields in output CSV Files.

### b. Formatting Parameters

Select This Tab to Specify User Preferences.

Following Screen appears

The screenshot shows the 'xDR Storage' screen with the 'Formatting Parameters' tab selected. The 'Time' tab is active. The 'Date/Time Formats' section contains the following fields:

- Date format: dd/MM/yyyy \*
- Time format: HH:mm:ss \*
- Date and time fields: dd/MM/yyyy HH:mm:ss \*
- Duration fields: hh:mm:ss.ms
- Time zone: (GMT -07:00) America/Los\_Angeles

Figure 229: xDR Storage Screen

Specific preferences will be applied while creating the Storage DFP as selected by user in this screen.

**Note:** - All the preferences screen are same as global user preferences and as in previous release except for CSV preference. CSV Preference is provided for CSV type Storage DFP formatting.

Select Time Tab for Time Related preferences. E.g. you can change Date and Time formats, TimeZone etc.

Select Enumeration Tab for providing Mapping. Following mapping are provided

Translate ENUM values

Point Code to Node Name

Link Short Name to Long Name

Select point Code Tab for Point Code related preferences. You can select whether point code format is displayed in Hexadecimal or Decimal Format.

Select CIC tab for CIC Related Preferences. You can select whether this field is displayed in Hexadecimal or Decimal Format.

Select CSV tab for specifying CSV File Related preferences. This TAB look like as below

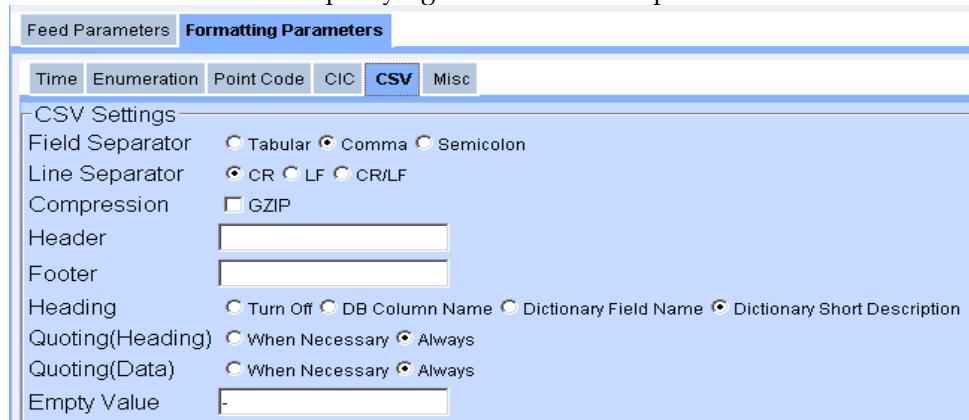


Figure 230: Formatting Parameters(CSV) screen

Field Separator :- Select whether the fields in CSV File generated from this DFP are separated by *Tabular* or *Comma* or *Semicolon* Field.

Line Separator :- Select whether the record lines in CSV File should be separated by *CR*, *LF* or *CR/LF*

Compression :- Click CheckBox if CSV Files Need to be compressed in *GZIP* format.

Header :- Input header text that should appear as header in the CSV File Generated.

Footer :- Input Footer text that should appear as footer in the CSV File Generated.

Heading :- Select one of Radio Button to provide any one of Heading in the CSV File.

Quoting ( Heading ) :- Select Either "When Necessary" or "Always" to specify quoting on heading field.

Quoting ( Data ) : - Select Either "When Necessary" or "Always" to specify quoting on Data field.

Empty Value :- Provide the String for Empty Value in CSV Text File.

Select MISC tab for specifying miscellaneous preferences. This TAB look like as below

The screenshot shows the 'Formatting Parameters (Misc)' screen. At the top, there are tabs for 'Definition', 'Input Streams', 'xDR Filters', 'xDR Storage', 'Storage Type' (set to 'CSV Files'), 'Feed Parameters', and 'Formatting Parameters'. Under 'Formatting Parameters', there are sub-tabs for 'Time', 'Enumeration', 'Point Code', 'CIC', 'CSV', and 'Misc'. The 'Misc' tab is selected. The screen is divided into sections: 'DUMP' (Prefix: \$, Delimiter: , Suffix: , Example: \$0A CD 12 B0), 'Percent' (Percent: radio button selected, Ratio: radio button unselected, Percent symbol: %, Minimum number of decimal places: 0, Maximum number of decimal places: 2, Example: %80.4), and a summary section.

Figure 231: Formatting Parameters(Misc) screen

	Field	Description
DUMP		For binary values as well as formatting the binary data. The bytes are represented as hexadecimal values.
	Prefix	Enables you to enter a prefix for the binary values
	Delimiter	Enables you to enter a specific delimiter included for each value.
	Suffix	Enables you to select a suffix for the binary values.
Percent		Enables you to choose between a percent value or a ratio.
	Percent	Select this field if you want the value to be shown as a percentage.
	Ratio	Select this field if you want the value to be shown as a ratio.
	Percent symbol	Default is the "%" sign, but you can select to use another symbol to represent percent.
	Minimum number of decimal places	Sets the minimum number of decimal places shown in the value (default is 0).
	Maximum number of decimal places	Sets the maximum number of decimal places shown in the value (default is 2, range is: 1-1,000,000).

TABLE 95: MISC FIELDS DESCRIPTION

18. Click **Create**.

The *Storage Dataflow Processing* is created. You are now prompted to **Synchronize** the subsystem to save the changes.

***Listing xDR Builders***

The builder information is needed for IXP configuration. xDR builders perform various functions from correlating to deciphering information in an xDR. Builders are tracked by CCM on a per-subsystem basis. An IXP Subsystem is assumed to have a single version of a particular builder installed on its servers. In addition, dictionaries used by discovered builders are also retrieved and stored in the system.

Complete the following task to list all the xDR builders in an IXP subsystem:

- Select **Mediation > IXP Subsystem > xDR Builders**. The *xDR Builder List* screen opens shown below.



The screenshot shows the 'Network Views' interface with the 'Mediation' section selected. Under 'Mediation', the 'xDR Builders' node is expanded, revealing a list of builders. The main window displays a table titled 'Records/Page: 50 Page 1/4' with columns: Name, Version, Description, and Dictionary Name. The table lists 8 entries, each corresponding to a specific builder type and its version.

Name	Version	Description	Dictionary Name
1 ATM Decoding	1.1.0.0	ATM DecodingBuilder Type	
2 OPRS GTP	5.1.0.2	OPRS GTPBuilder Type	
3 OPRS Gb	5.0.4.3	OPRS GbBuilder Type	
4 OPRS Gb Stats By Cell	5.0.2.1	OPRS Gb StatsBuilder Type	OPRS Gb Stats_5,0,2
5 OPRS Gb Stats By IMEI	5.0.2.1	OPRS Gb StatsBuilder Type	OPRS Gb Stats_5,0,2
6 OPRS Gb TDR capture	5.3.0.2	OPRS Gb TDRBuilder Type	OPRS Gb TDR_CAPTURE_5,3,0
7 OPRS Gb TDR reconstitution	5.3.0.2	OPRS Gb TDRBuilder Type	OPRS Gb TDR_5,3,0
8 OPRS GnRp CDR	5.1.0.1	OPRS GnRp CDRBuilder Type	OPRS GnRp CDR_5,1,0

Figure 232: Xdr Builder List Screen

The following information is provided:

Column	Description
Name	xDR Builder Name
Version	Current version of the builder that is stored in the subsystem
Description	Brief description of the builder
Dictionary name	The name of the dictionary associated with the builder

TABLE 96: XDR BUILDER LIST DESCRIPTIONS

***About Sessions***

You can click on Sessions in the object tree to view the list of available sessions. In this screen, you can add, modify, or delete *Sessions* on a server.

**Note:** The session name must be unique for each *IXP Subsystem* or *Dataserver*, but sessions can have identical names if they reside on separate IXP Subsystems.

**Adding an xDR Session to a Server**

Complete these steps to add a session to a server:

1. Select **IXP Subsystem > Sessions**.  
The *Sessions* list screen opens.
2. Click **Add**, the *Add Session* screen opens.

Session Name: Sample\_Session

Lifetime (hours): 72

Storage: ixp5001-1a

Dictionary: 8951monica\_sess

Description: This is an example of a session

Buttons: Reset, Cancel, Add

Figure 233: Add Sessions Screen

3. Type a **Session Name**.

**Note:** The *Session Name* must be unique for each *IXP Subsystem* or *Dataserver*, but sessions can have identical names if they reside on separate *IXP Subsystems*.

4. Type in the **Lifetime** (number of hours the session exists).
5. Select the **Storage Subsystem**.
6. Select the **Dictionary** associated with the *Session*.
7. (Optional) Select a **Session Backup** (None, xDR only or xDR and PDU). Default is *None*.
8. (Optional) Type in a **Description**. Shown below is a completed session.
9. Click **Add**.

The *Session* is added to the session list shown below.

	Session	Type	Format	Dictionary	Host	Lifetime
<input type="checkbox"/>	1 AG_ISUP_ANSI_28	RECONSTITUTION	SINGLE	SS7 ISUP ANSI CDR_2,4,0	ixp0960-1a	120
<input checked="" type="checkbox"/>	2 Sample_Session	STATISTICS	SINGLE	BuildMonitor	ixp0960-1a	150
<input type="checkbox"/>	3 ixp0960StreamMonitor	STATISTICS	SINGLE	StreamMonitor	ixp0960-1a	336
<input type="checkbox"/>	4 ixp0960BuildMonitor	STATISTICS	SINGLE	BuildMonitor	ixp0960-1a	336
<input type="checkbox"/>	5 ixp0960OperateMonitor	STATISTICS	SINGLE	OperateMonitor	ixp0960-1a	336
<input type="checkbox"/>	6 ixp0960StoreMonitor	STATISTICS	SINGLE	StoreMonitor	ixp0960-1a	336
<input type="checkbox"/>	7 INAP_Rec_28	RECONSTITUTION	SINGLE	SS7 INAP TDR_2,9,5	ixp0960-1a	100

Figure 234: Completed Session In Session List

#### Modifying an xDR Session

1. Select **IXP Subsystem > Sessions**.  
The *Sessions* list screen opens.
2. Select the **Session** to be modified shown here.

Session							
	Session	Type	Format	Dictionary	Host	Lifetime	
<input checked="" type="checkbox"/>	1 Sample_Session	CAPTURE	SINGLE	SS7 AIN TDR_CAPTURE_2,6,1	ixp5001-1a	72	
<input type="checkbox"/>	2 Sample_Session_1	RECONSTITUTION	SINGLE	SS7 AIN TDR_2,6,1	ixp5001-1a	72	
<input type="checkbox"/>	3 ixp5001 StreamMonitor	STATISTICS	SINGLE	StreamMonitor	ixp5001-1a	336	

Figure 235: Selected Session For Modification

3. Click **Modify** on the toolbar.  
The *Session Record* opens.
4. Make the **needed modifications**.

Note: IF session point code feature is enabled then to modify flavor of session refer [Appendix D: Defining and Modifying Flavor \(PC Format\) of Session at CCM](#)

**Note:** You cannot select another dictionary for the session. To use another dictionary, you must create a new session.

5. Click **Modify**.  
The *Record* is modified.

#### Deleting an xDR Session

Complete these steps to delete an *xDR Session*:

**Note:** You cannot delete a session that is using a *Dataflow Processing*. You must first delete the dataflow processing or modify the *Dataflow Processing* to use another session.

**Note:** You must also **Apply Changes** for any changes in the subsystem to take effect.

1. Select **Mediation >IXP > Subsystem > Sessions**.  
The *Sessions* list screen opens.
2. Select the **Session** to be deleted.
3. Click **Delete**.
4. Click **OK** at the prompt.  
The *Session* is deleted.

#### About Partial xDRs

The Partial xDR feature in CCM is utilized by ProTrace for processing real-time traces on the SS7 ISUP ANSI, VoIP SIP-T ANSI CDR and VoIP SIP CDR protocols. Using the partial *xDR Feature* you can configure in the build and store process.

**Note:** You must configure partial ANSI ISUP a dSIP-T/SIP xDRs manually using the build process.

**Note:** In addition, in configuring partial ANSI ISUP a dSIP-T/SIP xDRs you must also configure xDR filters so that partial and completed xDRs are written to the proper session.

#### *Creating an xDR Session for a Dataflow Processing*

Complete these steps to create an xDR Session for a dataflow processing. You can create a session for either an Operate or a Storage dataflow processing:

1. In the *xDR Storage* screen, select **Create Session**.  
The *xDR Storage* screen is shown below.

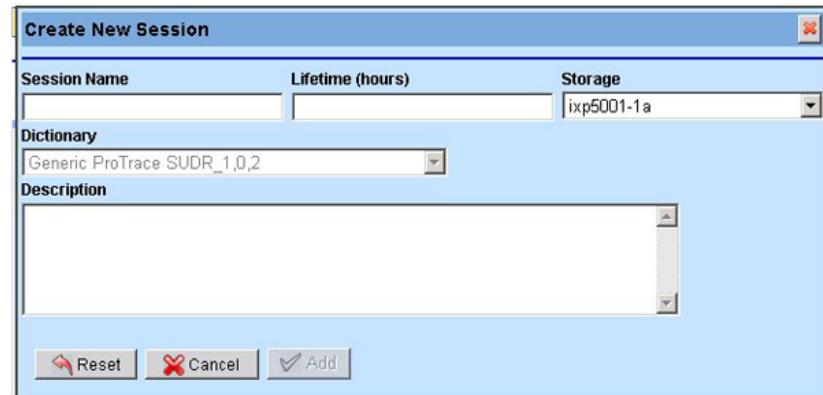


Figure 236: Create Session Screen

2. Type a **Session Name**.
3. Type in the **Lifetime** (number of hours the session exists).
4. Select the **Storage Subsystem**.
5. Select the **Dictionary** associated with the *Session*.
6. (Optional) Type in a **Description**. Shown below is a completed session.

Note: IF session point code feature is enabled then to configure flavor of session refer [Appendix D: Defining and Modifying Flavor \(PC Format\) of Session at CCM](#)

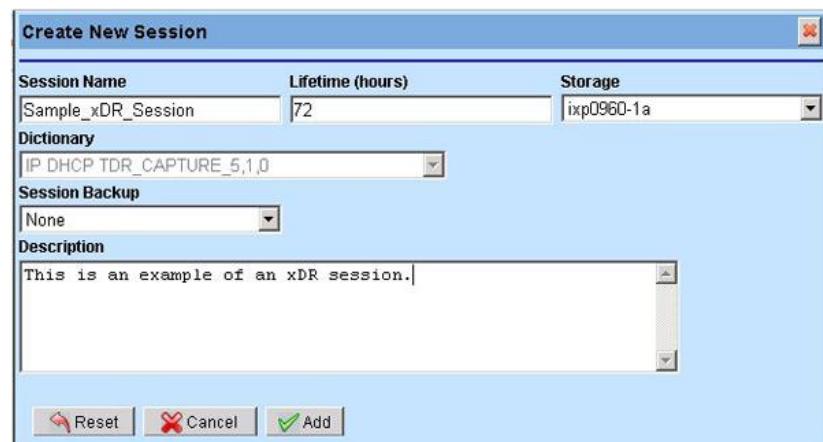


Figure 237: Completed Xdr Session Screen

7. Click Add.

The *Session* is created and the *Session Name* shows up in the *Session* field shown below.

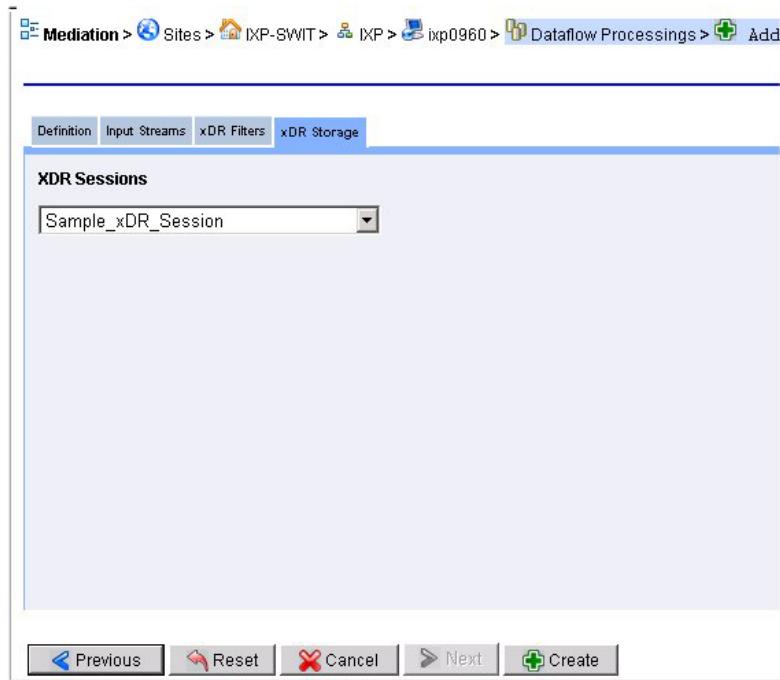


Figure 238: Added Session in Xdr Storage Screen

8. You can now **Create** the *Storage Dataflow Processing*.

### Modifying an xDR session for a dataflow Processing

Complete these steps to modify an xDR session for a Dataflow Processing:

1. Select **Mediation > Site > IXP Subsystem > Subsystem Name > Dataflow Processings**.  
The *Dataflow Processing List* screen opens.
2. Select the **Dataflow Processing** to be modified.
3. Click **Modify**.
4. Make the **necessary modifications**.
5. Click **Modify**.  
The *Dataflow Processing* is modified. You must now **Synchronize** the subsystem. See [See About Applying Changes to a Subsystem \(Synchronizing\)](#).

### Deleting an xDR session from a dataflow Processing

1. Select **Mediation > Site > IXP Subsystem > Subsystem Name > Dataflow Processings**.  
The *Dataflow Processing List* screen opens.
2. Select the **Dataflow Processing** to be deleted.
- Note:** You cannot delete a dataflow processing if there are any dependencies on it. You are prompted if there are dependencies belonging to the dataflow processing being deleted.
4. Click **Delete**.
5. Click **OK** at the prompt.  
The *Dataflow Processing* is deleted. You must now **Synchronize** the subsystem. See [See About Applying Changes to a Subsystem \(Synchronizing\)](#).

### About Q.752 Dataflows

Q.752 *Dataflows* are a type of dataflow processing (see “[Configuring xDR Dataflow Processings](#)”). A Q.752 Dataflow is created to route Q.752 statistical data from XMF to IXP.

### ***About configuring Q.752 Dataflows***

Configuring Q.752 Dataflows is performed in a specific sequence. CCM is set up to enable you to go through this sequence in Wizard fashion through a set of tabs. The procedure for each tab is discussed in proper sequence.

### ***About managing counter Activation***

You route specific Q.752 traffic from the XMFs to IXP by choosing Q.752 counters. These counters are defined by the SS7 standards from Q.752 statistics. Activating and deactivating the counters internally creates the corresponding dataflow build and stores Dataflow Processings and then routes the data to sessions (created automatically). It is important that you choose what input streams to apply the Q.752 Dataflows to. On choosing the input streams you have the option of configuring two parameters:

- No PDU Timeout
- Automatically Clear Alarms

These two parameters are internally applied to the build dataflow processes. You then have the option to apply SSN and linkset filters to the configuration. The filter values are applied to the build dataflow process created internally. When you navigate to the Linkset filters tab, you are presented with a list can choose a set of linksets and apply a pre-created OPC-DPC-SIO filter to the linksets.

When you choose to de-select a counter the associated session is not deleted automatically. You can navigate to the *Sessions* list and delete the session manually. This results in the *Session* also are deleted in the DWH.

### ***About the Q.752 Dataflow Assistant***

The Q.752 Dataflow Assistant option provides a wizard to help you quickly create a Q.752 processing. The process follows five stages:


- Selecting the Q.752 counters
- Selecting the PDU Inputs (Streams and/or Dataflows)
- Configuring the General Parameters
- Selecting (or not) an SSN Filter to be used with the processing
- Selecting the Linkset Filters to be used with the processing

### ***Using the Q.752 Processing Assistant***

**Note:** Because Q.752 Processings utilize input streams, you must first create your input streams or PDF Dataflows before you create your Q.752 Processings.

1. Select **Mediation > Site > IXP > Subsystem** that needs the Q.752 Processings.

The *Q.752 list* screen opens

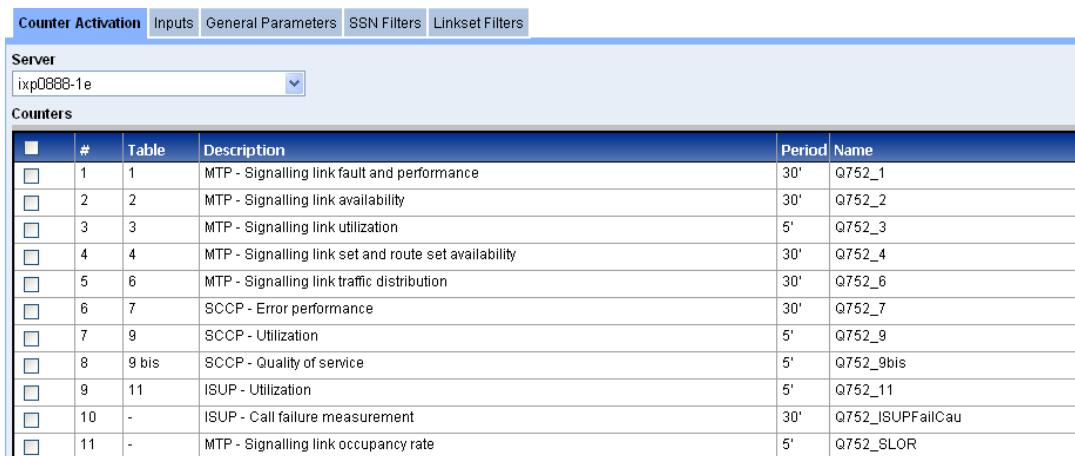

The screenshot shows a software interface for managing Q.752 Processings. At the top, there is a navigation bar with tabs: Counter Activation, Inputs, General Parameters, SSN Filters, and Linkset Filters. The 'Counter Activation' tab is currently selected. Below the navigation bar, there is a 'Server' dropdown menu set to 'ixp0888-1e'. The main area is titled 'Counters' and contains a table with the following data:


	#	Table	Description	Period	Name
<input type="checkbox"/>	1	1	MTP - Signalling link fault and performance	30'	Q752_1
<input type="checkbox"/>	2	2	MTP - Signalling link availability	30'	Q752_2
<input type="checkbox"/>	3	3	MTP - Signalling link utilization	5'	Q752_3
<input type="checkbox"/>	4	4	MTP - Signalling link set and route set availability	30'	Q752_4
<input type="checkbox"/>	5	6	MTP - Signalling link traffic distribution	30'	Q752_6
<input type="checkbox"/>	6	7	SCCP - Error performance	30'	Q752_7
<input type="checkbox"/>	7	9	SCCP - Utilization	5'	Q752_9
<input type="checkbox"/>	8	9 bis	SCCP - Quality of service	5'	Q752_9bis
<input type="checkbox"/>	9	11	ISUP - Utilization	5'	Q752_11
<input type="checkbox"/>	10	-	ISUP - Call failure measurement	30'	Q752_ISUPFailCau
<input type="checkbox"/>	11	-	MTP - Signalling link occupancy rate	5'	Q752_SLOR

Figure 239: Q.752 Processing List Screen

2. Select one or more **Q.752 Counters** from the list.
3. Click **Next**.

The *Inputs* screen opens.

**Note:** The Inputs tab has two screens: *PDU Streams* and PDU Dataflows. Depending on your needs, you can select from one or both. If you are want to add streams, complete steps 4 and 5. If you want to add Dataflows, complete steps 6 thru 8.

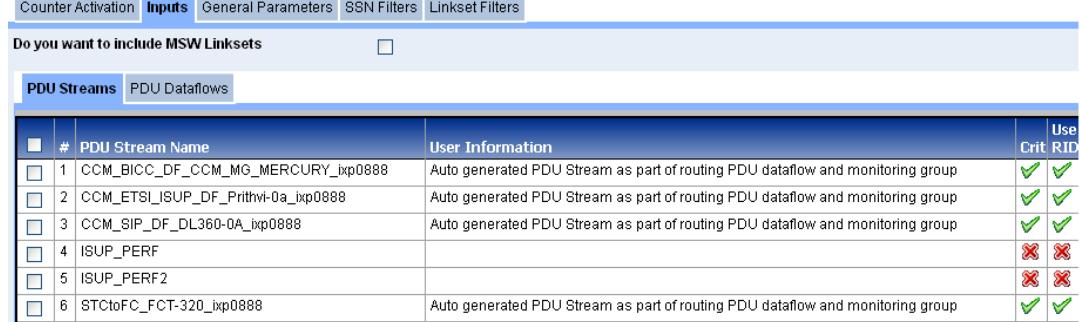

	#	PDU Stream Name	User Information	Use Crit RID
<input type="checkbox"/>	1	CCM_BICC_DF_CCM_MG_MERCURY_ixp0888	Auto generated PDU Stream as part of routing PDU dataflow and monitoring group	
<input type="checkbox"/>	2	CCM_ETS1_ISUP_DF_Pritivi-0a_ixp0888	Auto generated PDU Stream as part of routing PDU dataflow and monitoring group	
<input type="checkbox"/>	3	CCM_SIP_DF_DL360-0A_ixp0888	Auto generated PDU Stream as part of routing PDU dataflow and monitoring group	
<input type="checkbox"/>	4	ISUP_PERF		
<input type="checkbox"/>	5	ISUP_PERF2		
<input type="checkbox"/>	6	STCtoFC_FCT-320_ixp0888	Auto generated PDU Stream as part of routing PDU dataflow and monitoring group	

Figure 240: Inputs Screen (PDU Streams Tab)

4. Select one or more **PDU Streams** from the list.
- If you want to add Dataflows, complete steps 7 thru 9
5. (Optional) If you want *Message Switch* linksets included, click **MSW** field where it asks you if you want *MSW* linksets.
6. Select the **PDU Dataflows** tab.




	#	PDU Dataflow Name	Type
<input type="checkbox"/>	1	CCM_BICC_DF	MSU
<input type="checkbox"/>	2	CCM_ETS1_ISUP_DF	MSU
<input type="checkbox"/>	3	DF1test	MSU
<input type="checkbox"/>	4	STCtoFC	MSU
<input type="checkbox"/>	5	mercury_sths1_1	MSU

Figure 241: Inputs Screen (PDU Dataflows Tab)

7. Select what type of **Dataflow** (SS7 / Q.752).
- Note:** You can select both types of input streams.
8. Select one or more **PDU Dataflows** from the list.
9. Click **Next**.

The *General Parameters* screen appears.

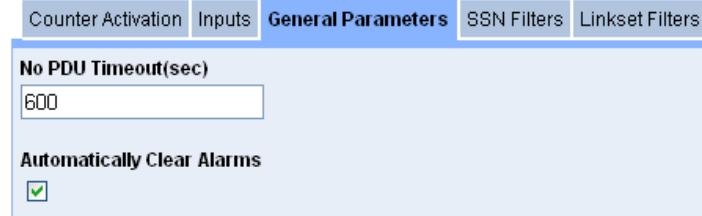

No PDU Timeout(sec)  
600

Automatically Clear Alarms

Figure 242: General Parameters Screen

10. Enter the number of sec in the **No PDU Timeout** field (default is 600).
11. (Optional) Select to **automatically clear alarms** after the process has run.
12. Click **Next**.

The *SSN Filter* screen appears.

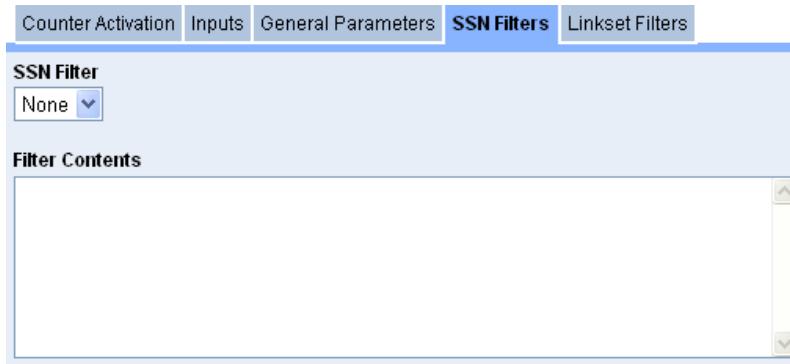


Figure 243: Linkset Filters Tab

13. Select the **SSN Filter** type from the pull-down menu.  
The content of the *Filter* appears in the Filter Contents field.
14. Click **Next**  
The *Linkset Filters* screen appears.

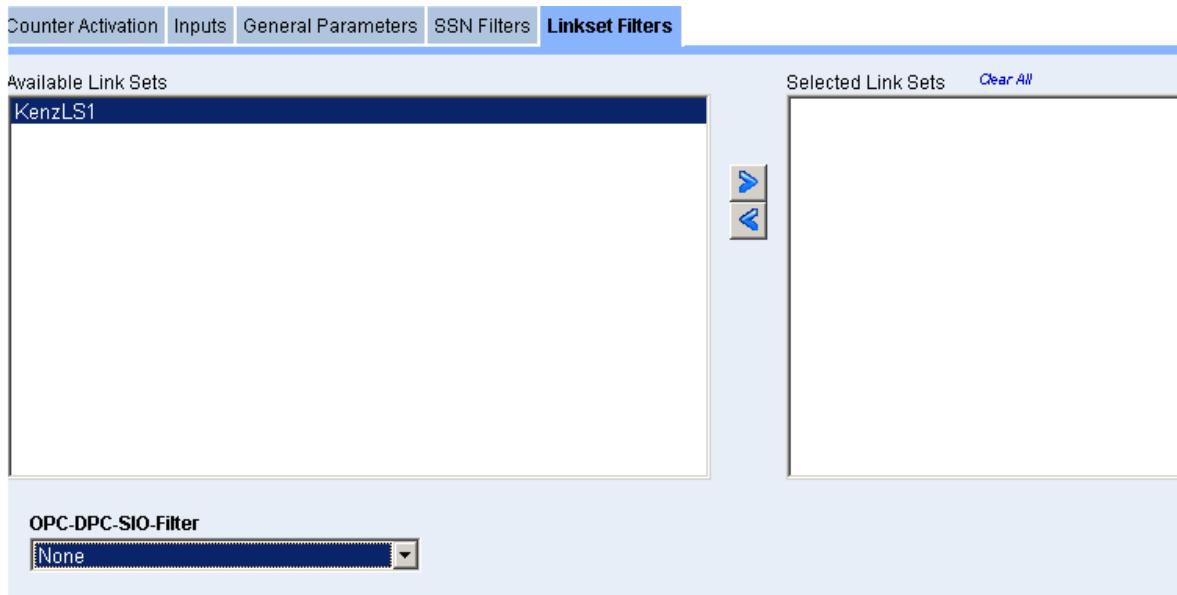


Figure 244: Linkset Filters Tab

1. Select one or more **Available Linksets**.
2. Click right arrow to place them into the **Selected Linksets** field.
3. (Optional-according to the linksets used) Select an **OPC-DPC-SIO Filter**.
4. Click **Finish**.

The configured *Q.752 Processing* is saved.


**Note:** Make sure you **Apply Changes** for the changes to be reflected in the IXP Subsystem.

## About Distributions

The distribution option enables you to move IXP Dataflow Processing from one server to another for the purpose of load sharing.

Complete these steps to use the Distribution option:

1. Select **Site >IXP Subsystem > Distribution**.  
The *Dataflow Distribution* list screen opens, shown below.

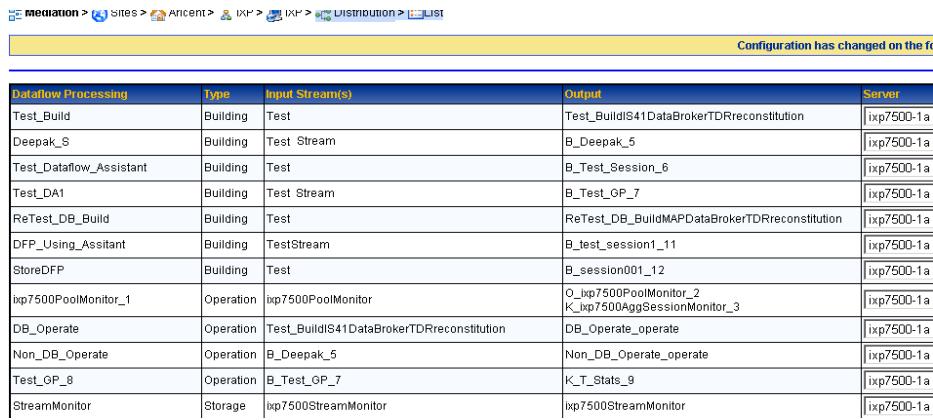

Dataflow Processing	Type	Input Stream(s)	Output	Server
Test_Build	Building	Test	Test_BuildIS41DataBrokerTDRreconstitution	ixp7500-1a
Deepak_S	Building	Test Stream	B_Deepak_5	ixp7500-1a
Test_Dataflow_Assistant	Building	Test	B_Test_Session_6	ixp7500-1a
Test_DA1	Building	Test Stream	B_Test_OP_7	ixp7500-1a
ReTest_DB_Build	Building	Test	ReTest_DB_BuildMAPDataBrokerTDRreconstitution	ixp7500-1a
DFP_Using_Assistant	Building	TestStream	B_test_session1_11	ixp7500-1a
StoreDFP	Building	Test	B_session001_12	ixp7500-1a
ixp7500PoolMonitor_1	Operation	ixp7500PoolMonitor	O_ixp7500PoolMonitor_2 K_ixp7500AggSessionMonitor_3	ixp7500-1a
DB_Operate	Operation	Test_BuildIS41DataBrokerTDRreconstitution	DB_Operate_operate	ixp7500-1a
Non_DB_Operate	Operation	B_Deepak_5	Non_DB_Operate_operate	ixp7500-1a
Test_OP_8	Operation	B_Test_OP_7	K_T_Stats_9	ixp7500-1a
StreamMonitor	Storage	ixp7500StreamMonitor	ixp7500StreamMonitor	ixp7500-1a


Figure 245: Distribution List

2. Select a different **Server** from the dataflow processing Server column pull-down list.
3. Click **Done**.

You are prompted to **Synchronize** to save the changes to the subsystem.

## About Software

The software option enables you to view the applications on each IXP server. Selecting the software option opens the *Software List* screen shown below:

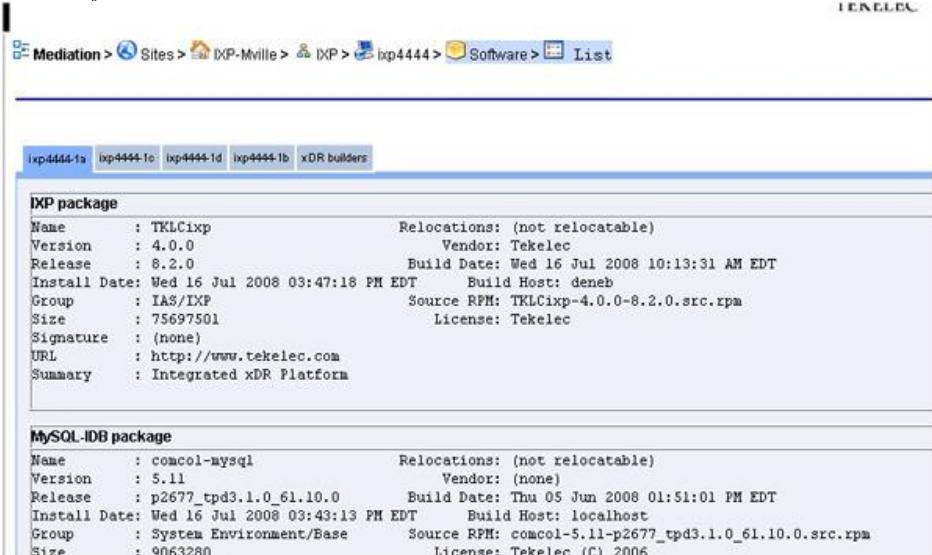

IXP package	
Name	: TKLCixp
Version	: 4.0.0
Release	: 8.2.0
Install Date	: Wed 16 Jul 2008 03:47:18 PM EDT
Group	: IAS/IXP
Size	: 75697501
Signature	: (none)
URL	: http://www.tekelec.com
Summary	: Integrated xDR Platform
Relocations: (not relocatable)	
Vendor: Tekelec	
Build Date: Wed 16 Jul 2008 10:13:31 AM EDT	
Build Host: deneb	
Source RPM: TKLCixp-4.0.0-8.2.0.src.rpm	
License: Tekelec	
MySQL-IDB package	
Name	: comcol-mysql
Version	: 5.11
Release	: p2677_tp3.1.0_61.10.0
Install Date	: Wed 16 Jul 2008 03:43:13 PM EDT
Group	: System Environment/Base
Size	: 9063280
Relocations: (not relocatable)	
Vendor: (none)	
Build Date: Thu 05 Jun 2008 01:51:01 PM EDT	
Build Host: localhost	
Source RPM: comcol-5.11-p2677_tp3.1.0_61.10.0.src.rpm	
License: Tekelec (C) 2006	

Figure 246: Software List Screen

The *Software List* screen has a tab for each server in the subsystem as well as the xDR Builders.

The *IXP Server* tab lists:

- IXP Package contents (shown above)
- MySQL-IDB Package contents (shown above)
- COMCOL Package contents (not shown)
- IXP Builders Package contents (not shown)

## About Subsystem Preferences

Subsystem references enable you to create preferences with values for the Subsystem.

### *Adding a subsystem Preference*

Complete these steps to add a subsystem preference:

1. Select **Mediation > Site > Subsystem > Subsystem Preferences**.

The *Subsystem Preferences* screen opens shown below.




#	Parameter Name	Value	Description
1	Garbage period(s)	60	IXP Parameter holding default value for Garbage period(s). Number of seconds
2	No PDU Timeout(s)	600	IXP Parameter holding default value for No PDU Timeout(s). Number of seconds
3	RetentionTime (Build)	5	Retention Time for Build processes in seconds
4	RetentionTime (Operate)	5	Retention Time for Operate processes in seconds
5	RetentionTime (Store)	5	Retention Time for Store processes in seconds
6	FlushingTimeOut (Store)	5	Buffer Flush Timeout for Store processes in seconds

Figure 247: Subsystem Preferences List Screen

- Click **Add**.

The *Subsystem Preferences Add* screen opens shown below.

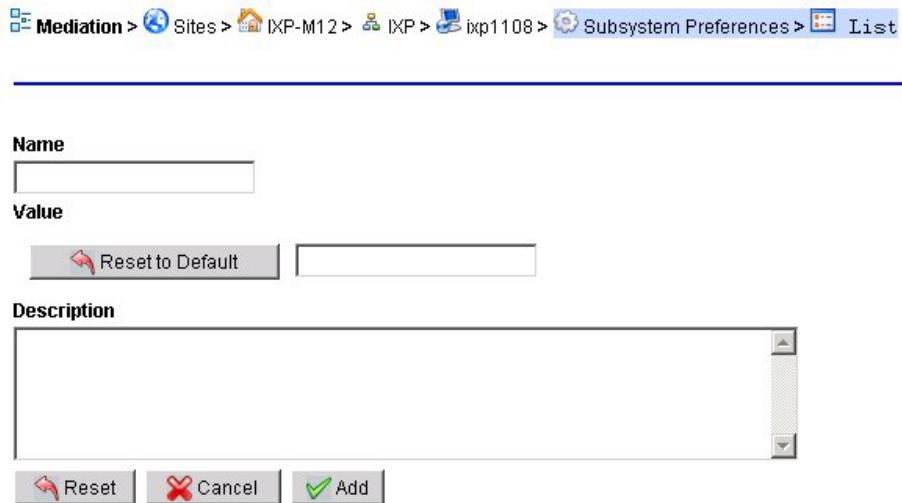

**Name:**

**Value:**

**Description:**

Figure 248: Subsystem Preferences List Screen

- Enter the **Name** of the preference.
- Enter a **Value** (or to reset value click **Reset to Default**).

**Note:** The values can be for:

- Garbage Periods - integer between 0 and 32767.
- No PDU Timeouts - integer between 1 and 32767.
- RetentionTime (Build) - default is 5.
- RetentionTime (Operate) - default is 5.
- RetentionTime (Store) - default is 5.
- FlushingTime (Store) - default is 5.

- (Optional) Enter a **Description** of the preference.
- Click **Add**.

The *Preference* is added to the list.

### Modifying a subsystem Preference

Complete these steps to add a subsystem preference:

- Select **Mediation > Site > Subsystem > Subsystem Preferences**.  
The *Subsystem Preferences* screen opens.
- Select the **Preference** that needs to be modified.
- Make the **necessary modifications**.
- Click **Modify**.

The *Preference* is modified.

#### **Deleting a Subsystem Preference**

Complete these steps to add a subsystem preference:

1. Select **Mediation > Site > Subsystem > Subsystem Preferences**.  
The *Subsystem Preferences* screen opens.
2. Select the **Preference** to be deleted.
3. Click **Delete**.
4. Click **OK** at the prompt.  
The *Record* is deleted.

## Managing Multiple IXP Subsystems

The Mediation Perspective enables you to manage certain elements globally, (multiple IXP subsystem within a site or IXP subsystems within multiple sites). The following elements can be managed globally.

- Q.752 filters - see [About Q.752 Filters](#).
- xDR filters - see [About xDR Filters](#).
- Dictionaries - see [About Dictionaries](#).
- Sessions - see [About Sessions](#).

## About Q.752 Filters

Each IXP subsystem has the capability to generate Q.752 statistics based on incoming PDU streams. IXP supports filtering the PDUs using SSN and DPC-OPC-SIO filters. These filters are defined globally. The filters are referenced when configuring Q.752 for any IXP Subsystem.

Selecting *Q.752 Filters* in the object tree opens its two options:

- SSN Filters
- DPC-OPC-SIO filters.

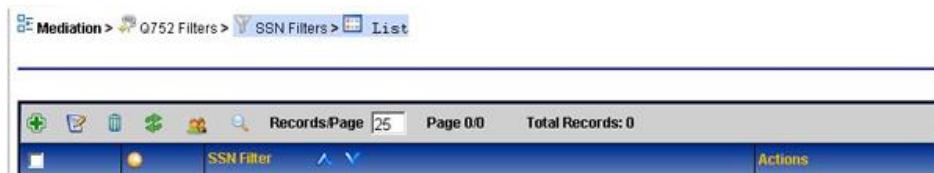


Figure 249: SSN Filters List Screen

## Creating SSN Filters

Complete these steps to add an SSN Filter:

1. Select **Q.752 Filters > SSN Filters > List**.  
The *List* screen opens.
2. Click **Add**.  
The *Add* screen opens shown below.

Field	Description
Filter Name	Alphanumeric field for creating an SSN filter name. The name cannot contain spaces.
Enter SSN	Numeric field where an integer is entered between 1-255.
Add filter button	Clicking this button, adds the SSN to the list, you must have a minimum of 1 and a maximum of 10 SSN's.
SSN List	Lists all the SSNs that you created.
Remove from List button	Removes the highlighted SSN from the list.

Field	Description
Reset button	Resets all the fields to their defaults (blank).
Cancel button	Cancels the procedure and returns you to a blank screen.
Create button	Saves the filter to the system and creates a record in the SSN list screen.

TABLE 97: ADD SSN FILTER SCREEN

Figure 250: SSN Filter Add Screen

3. Enter a **Filter Name**.
4. Enter a **SSN** (integer 1-255).
5. Click **Add** to List.  
The *SSN* is added to the list.
6. Repeat steps 4 & 5 to add more SSNs.
7. Click **Create**.

The *Filter* is added to the SSN List screen shown below.

SSN Filter		Actions
1	SampleSSNFilters	

Figure 251: SSN Filter Add Completed

## Modifying an SSN Filter

Complete these steps to modify an SSN from a Filter:

**Note:** If the SSN filter is associated with a Q.752 configuration and the filter is modified, it results in the modification of the Q.752 configuration internally.

1. Select **Q.752 Filters > SSN filters > List**.  
The *List* screen opens.
2. Select the **SSN Filter** to be modified.

3. Click **Modify**.  
The *Modify* screen opens.
4. Make the **needed modifications**.
5. Click **Modify**.  
The *Record* is modified.

## Using remove from list Operation

Complete these steps to remove an SSN from a Filter using the remove from list operation:

1. When the filter record is open, (either in the add mode or modify mode), **highlight** the SSN to be removed.
2. Click the **Remove from List** button.
3. Click either **Create** or **Modify** (depending on which mode you are in).  
The SSN is removed from the list.

## Deleting an SSN Filter

Complete these steps to delete an SSN from a filter:

**Note:** If the SSN filter is associated with a Q.752 configuration you cannot delete the filter in this location. You have to manually remove the filter by navigating to the Q.752 configuration and setting the SSN Filter to none. You will then have to return to this location to delete the filter.

1. Select **Mediation > Q.752 Filters > SSN Filters > List**.  
The *List* screen opens.
2. Select the **SSN Filter** to be deleted.
3. Click **Delete**.
4. Click **OK** at the prompt.  
The *Filter* is deleted.

## Listing OPC-DPC-SIO Filters

Select **Mediation > Q.752 filters > OPC-DPC-SIO Filters**.

The *List* screen opens shown below.



Figure 252: OPC-DPC-SIO Filters List Screen

From this screen you can add new OPC-DPC-SIO filters or manage existing ones.

Field	Description
Filter Name	Alphanumeric field for creating an SSN filter name. The name cannot contain spaces.
Select Flavor	Pull-down list that has the different protocol/flavors. You can have multiple flavors in one filter.
OPC	Originating Point Code is entered here in the appropriate format/flavor
DPC	Destination Point Code is entered here in the appropriate format/flavor
SIO	Service Indicator is entered as an integer between 1-1million
Add to list button	Clicking this button, adds the OPC-DPC-SIO combination to the list, you must have a minimum of 1 and a maximum of 5 OPC-DPC-SIO's.
OPC-DPC-SIO List	Lists all the SSNs that you created.
Remove from List button	Removes the highlighted SSN from the list.
Reset button	Resets all the fields to their defaults (blank).
Cancel button	Cancels the procedure and returns you to a blank screen.
Create button	Saves the filter to the system and creates a record in the OPC-DPC-SIO list screen.

TABLE 98: ADD OPC-DPC-SIO FILTERS SCREEN

Figure 253: OPC-DPC-SIO Add Screen - Completed

4. Enter a **Filter Name**.
5. Select a **Flavor**.
6. Enter a **OPC** (same format as selected).
7. Enter a **DPC** (same format as selected).
8. Enter a **SIO** (integer between 1-1 million).
9. Click **Add to List**.  
The *OPC-DPC-SIO* is added to the list.
10. Repeat steps 4 & 5 to add more OPC-DPC-SIOs.
11. Click **Create**.

The *Filter* is added to the OPC-DPC-SIO List screen shown below.

		OPC-DPC-SIO Filter Id	Actions
	1	Sample_OPc-DPC-SIO_Filter	

Figure 254: OPC-DPC-SIO Filter Add Completed

## Modifying an OPC-DPC-SIO Filter

Complete these steps to modify an OPC-DPC-SIO from a filter:

Note: If the OPC-DPC-SIO filter is associated with a Q.752 configuration and the filter is modified, it results in the modification of the Q.752 configuration internally.

1. Select **Mediation > Q.752 Filters > OPC-DPC-SIO Filters**.  
The *List* screen opens.
2. Select the **OPC-DPC-SIO Filter** to be modified.
3. Click **Modify**.  
The *Modify* screen opens shown below.
4. Make the **needed modifications**.
5. Click **Modify**.  
The *Record* is modified.

## Removing an OPC-DPC-SIO number from filter List

Complete these steps to remove an OPC-DPC-SIO from a filter using the remove from list operation:

1. When the filter record is open, (either in the add mode or modify mode), **highlight** the **OPC-DPC-SIO** to be removed.
2. Click the **Remove from List** button.
3. Click either **Create** or **Modify** (depending on which mode you are in).

The *OPC-DPC-SIO* is removed from the list.

## Deleting an OPC-DPC-SIO Filter

Complete these steps to delete an OPC-DPC-SIO from a filter:

Note: If the OPC-DPC-SIO filter is associated with a Q.752 configuration you cannot delete the filter in this location. You have to manually remove the filter by navigating to the Q.752 configuration and setting the OPC-DPC-SIO filter to none. You will then have to return to this location to delete the filter.

1. Select **Mediation > Q.752 Filters > OPC-DPC-SIO Filters**.  
The *List* screen opens.
2. Select the **OPC-DPC-SIO Filter** to be deleted.
3. Click **Delete**.
4. Click **OK** at the prompt.  
The *Filter* is deleted.

## About Dictionaries

Dictionaries describe a session, by providing its column names, titles, syntax, data type, and other information. A dictionary is a text file with an *.a7d* extension that is physically stored on a server. Dictionaries must be present in the NSP database in order for NSP applications to use them.

In general, a PIC application is not based on the specific content of a dictionary, rather, it can adapt based on the content of a dictionary. Therefore, for an application to be able to do anything with a session, the dictionary for it must reside in the NSP database. This section describes how to create dictionaries. Dictionaries are specified in ASCII format and a dictionary file extension is *.a7d*.

Below are the four types of dictionaries used in the system –


1. CAPTURE – Represents a protocol dictionary used by a builder.
2. RECONSTITUTION - Represents a protocol dictionary used by a builder.
3. STATISTICS – Represents a KPI dictionary which is automatically created in the system.
4. PARTIAL – Represents a user defined dictionary which is used for enrichment.

Partial dictionary ASCII file(*.a7d*) shall contains header like the following:

```
# -----
# Name: ....
# Type: Partial
#-----
```

No stack nor protocol nor builder shall be mentioned in the header. Partial dictionaries are created with the same name as that of the ASCII file(*.a7d*) name.

Select **Mediation > Dictionaries**. The *Dictionary List* screen opens shown below. From this screen you can add, modify and delete dictionaries.

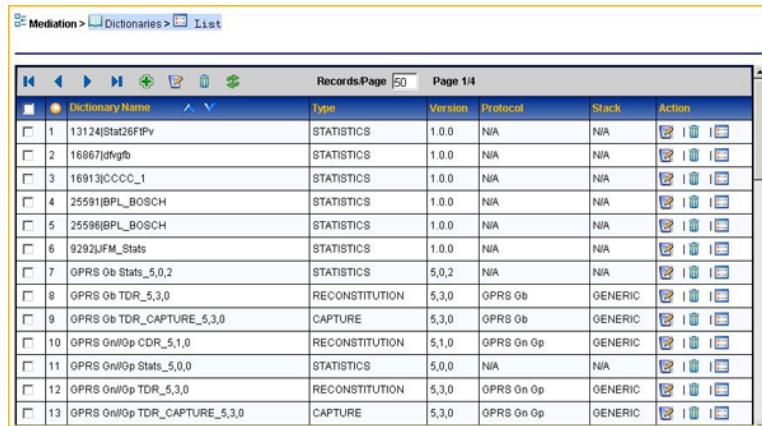

The screenshot shows a software interface for managing OPC-DPC-SIO filters. The title bar reads 'Mediation > Dictionaries > List'. The main area is a table titled 'Dictionary Name' with columns for Type, Version, Protocol, Stack, and Action. The table lists 13 entries, each with a checkbox, a numerical ID, and a descriptive name. The 'Action' column contains icons for edit, delete, and refresh. The table has a header row and 13 data rows. The bottom right corner of the table area says 'Page 1/4'.

	Dictionary Name	Type	Version	Protocol	Stack	Action
1	13124 Stat26FIPv	STATISTICS	1.0.0	N/A	N/A	
2	16687 dfygb	STATISTICS	1.0.0	N/A	N/A	
3	16913 CCCC_1	STATISTICS	1.0.0	N/A	N/A	
4	25591 BPL_BOSCH	STATISTICS	1.0.0	N/A	N/A	
5	25590 BPL_BOSCH	STATISTICS	1.0.0	N/A	N/A	
6	9292 JFM_Stats	STATISTICS	1.0.0	N/A	N/A	
7	GPRS Gb Stats_5,0,2	STATISTICS	5,0,2	N/A	N/A	
8	GPRS Gb TDR_5,3,0	RECONSTITUTION	5,3,0	GPRS Gb	GENERIC	
9	GPRS Gb TDR_CAPTURE_5,3,0	CAPTURE	5,3,0	GPRS Gb	GENERIC	
10	GPRS Gn Gp CDR_5,1,0	RECONSTITUTION	5,1,0	GPRS Gn Gp	GENERIC	
11	GPRS Gn Gp Stats_5,0,0	STATISTICS	5,0,0	N/A	N/A	
12	GPRS Gn Gp TDR_5,3,0	RECONSTITUTION	5,3,0	GPRS Gn Gp	GENERIC	
13	GPRS Gn Gp TDR_CAPTURE_5,3,0	CAPTURE	5,3,0	GPRS Gn Gp	GENERIC	

Figure 255: OPC-DPC-SIO Filter Add Completed


## Creating a Dictionary

Dictionaries describe a session, by providing its column names, titles, syntax, data type, and other information. Dictionaries must be present in the NSP database in order for NSP applications, such as *ProTrace* to use them.

Complete these steps to add a dictionary to the system:

1. Select **Mediation > Dictionaries**.
2. Click **Add** on the tool bar.

The *Add* screen opens shown below.

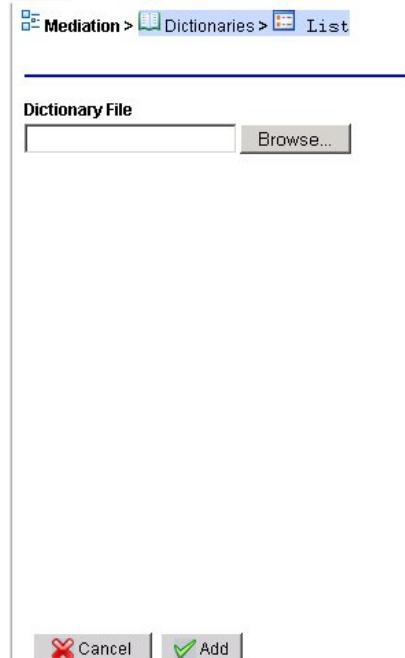

The screenshot shows a software interface for adding a dictionary. The title bar reads 'Mediation > Dictionaries > List'. Below it is a section titled 'Dictionary File' with a text input field and a 'Browse...' button. At the bottom are two buttons: 'Cancel' and 'Add'.

Figure 256: Add Dictionary Screen

3. Browse for the **Dictionary File**.  
(A dictionary is a text file with an a7d extension that is physically present on the IXP subsystem.)
4. Click **Add**.  
The *Dictionary* is added to the system.
5. From the host right-click menu, select **Apply Changes** for the changes to take effect.

## Modifying a Dictionary

Complete these steps to modify an existing dictionary file-type reconstitution:

1. Select **Mediation > Dictionaries**.  
The *List* screen opens.
2. Select the **Dictionary** to be modified.
3. Click **Modify**.  
The *ModifyDictionary* screen opens shown below.

Figure 257: Modify Dictionary - Dictionary Info Tab

4. Select **Dictionary Info** tab.
5. Modify either the **Protocol** or **Stack** information.
6. Select **Dictionary Attribute Info** tab shown below.

	Attribute Name	Short Name	Long Name	Description	Enumeration	Conditionable
<input type="checkbox"/>	1 CellUpdateDuringTransfer	Cell Update During Transfer	Cell Update During Transfer	Indicates if the Cell Update During Transfer	Yes	<input checked="" type="checkbox"/>
<input type="checkbox"/>	2 CauseNSorBSSGP	Cause NS or BSSGP	Cause NS or BSSGP	This field holds the differen	Yes	<input checked="" type="checkbox"/>
<input type="checkbox"/>	3 IMSI	IMSI	International Mobile Subsc	International Identifier of a	No	<input checked="" type="checkbox"/>
<input type="checkbox"/>	4 SMCause	SMCause	SM Cause	SM Cause	Yes	<input checked="" type="checkbox"/>
<input type="checkbox"/>	5 ServCentAdd	SCA	SCA, Service Center Addr	Taken from RP Originator	No	<input checked="" type="checkbox"/>
<input type="checkbox"/>	6 UDHI	UDHI	UDHI, Transfert protocol u	Parameter indicating that	Yes	<input checked="" type="checkbox"/>
<input type="checkbox"/>	7 ANumberNature	A-nature	A-nature of address	Taken from the nature of a	Yes	<input checked="" type="checkbox"/>
<input type="checkbox"/>	8 CellReselectionDuration	Cell Reselec Dur	Cell Reselection Duration	Duration between incomin	No	<input checked="" type="checkbox"/>
<input type="checkbox"/>	9 UnitsTotalSizeIn	Size UL	Size, for total sum of UL	Size (in bytes) of all UpLir	No	<input checked="" type="checkbox"/>

Figure 258: Modify Dictionary - Dictionary Attribute Info Tab

7. Select the **Attribute(s)** to be modified.  
You can modify the following fields.
  - a. Short Name
  - b. Long Name
  - c. Description
8. Select the following within the **Attribute**:
  - a. If Attribute is to have **Conditions**.
  - b. If Attribute is to be **Displayed**
  - c. If Attribute is to be **Masked**.

(For privacy reasons) If it is to be masked, then complete the following steps:

  - Select what part should be masked (**Beginning**, **End**, **Hide All**).

- How many **digits** should be hidden.

9. Repeat steps 7-8 for each attribute.
10. Click **Modify**.

The *Capture Type Dictionary* is modified.

## Enabling or Disabling PDU Decode Hiding for a Dictionary

Complete these steps to enable or disable PDU decode hiding for a specific dictionary:

**Note:** The PDU hide option must be enabled to use the PDU decode hide feature. See Enabling or Disabling PDU Hiding from the Home Page.

**Note:** The dictionary must be added to the system before the PDU decode hiding feature can be enabled or disabled.

1. Select **Mediation > Dictionaries**.  
The *List* screen opens.
2. Select the **Dictionary** to be modified.
3. Click **Modify** from the tool bar.
4. Select the **Protocol Hiding** tab.
5. Select **Hide** for a specific category.

**Note:** To disable the hide feature, click on the selection field to de-select the hide feature.

6. Click **Modify**.

## Editing Category Titles in a Dictionary

Complete these steps to edit Category Titles for a specific dictionary:

1. Select **Mediation > Dictionaries**.  
The *List* screen opens.
2. Select the **Dictionary** to be modified.
3. Click **Modify** from the tool bar.
4. Select the **Protocol Hiding** tab.
5. Select **Hide** for a specific category.

**Note:** To disable the hide feature, click on the selection field to de-select the hide feature.

6. Click **Modify**.

## Enabling and Disabling PDU Summary Hiding

Complete these steps to enable or disable PDU summary hiding:

**Note:** The PDU hide option must be enabled to use the PDU summary hide feature. See Enabling or Disabling PDU Hiding from the Home Page.

1. Select **Mediation**.
2. Select the **PDU Hiding** entry.
3. Select **Mask** for the heading.

**Note:** To disable the hide feature, unselect the Mask field.

4. Select **Hide All** option from the *Hidden From* column drop-down list.
5. Click **Modify**.

## Deleting a Dictionary

**Note:** You cannot delete a dictionary if it is associated with a session. You must first disassociate the session from the dictionary or delete any children of that dictionary.

Complete these steps to delete a dictionary from the system:

1. Select **Mediation > Dictionaries**.

The *List* screen opens.

2. Select the **Dictionary** to be deleted.
3. Click **Delete**.

**Note:** To delete only one dictionary file, click Delete in the actions column. To delete several dictionary files, select each file and click Delete on the toolbar.

4. Click **OK** at the prompt.


The *Dictionary* is deleted from the list.

## Viewing a Dictionary Source

The **View Source** option enables you to view the dictionary source file (*.a7d* file) as a text file. To view a **Dictionary Source File**, complete these steps:

1. Select **Mediation > Dictionaries**.

The *List* screen opens shown below.

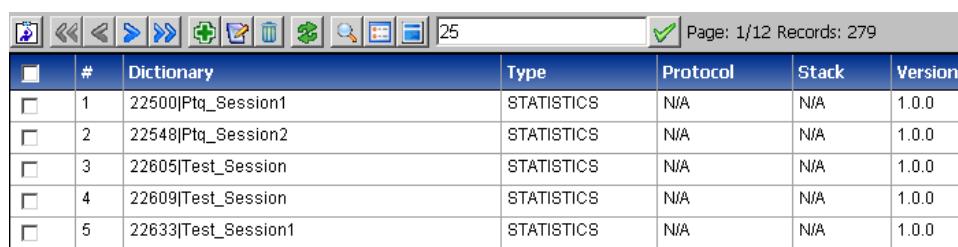


#	Dictionary	Type	Protocol	Stack	Version
1	22500 Ptq_Session1	STATISTICS	N/A	N/A	1.0.0
2	22548 Ptq_Session2	STATISTICS	N/A	N/A	1.0.0
3	22605 Test_Session	STATISTICS	N/A	N/A	1.0.0
4	22609 Test_Session	STATISTICS	N/A	N/A	1.0.0
5	22633 Test_Session1	STATISTICS	N/A	N/A	1.0.0

Figure 259: Modify Dictionary List Screen

2. Select the **Dictionary Source** you want to view shown above.

3. Click **View Source** from the tool bar.

The *Source File* opens, shown below.

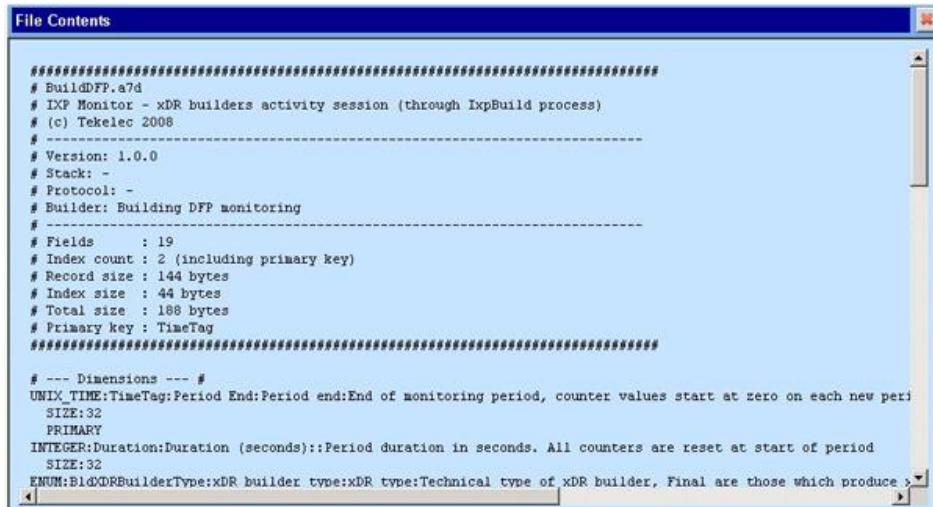

```

#####
# BuildDFP.a7d
# IXP Monitor - xDR builders activity session (through IxpBuild process)
# (c) Tekelec 2006
#
# Version: 1.0.0
# Stack: -
# Protocol: -
# Builder: Building DFP monitoring
#
# Fields      : 19
# Index count : 2 (including primary key)
# Record size : 144 bytes
# Index size  : 44 bytes
# Total size  : 188 bytes
# Primary key : TimeTag
#####
#
# --- Dimensions ---
# UNIX_TIME:TimeTag:Period End:Period end:End of monitoring period, counter values start at zero on each new period
# SIZE:32
# PRIMARY
# INTEGER:Duration:Duration (seconds)::Period duration in seconds. All counters are reset at start of period
# SIZE:32
# ENUM:BidXDRBuilderType:xDR builder type:xDR type:Technical type of xDR builder, Final are those which produce >

```

Figure 260: Dictionary List Screen

Click the **Close Icon** at the top right-hand corner of the screen to close the file.

## Listing Unused Dictionaries


The **Discrepancy Report** option enables you to list the dictionaries that are unused after an update. To view the **Discrepancy Report**, complete these steps:

1. Select **Mediation > Dictionaries**.

The *List* screen opens.

2. Select a **Dictionary** that has been updated.

**Note:** All updated *Dictionaries* will be in bold type.

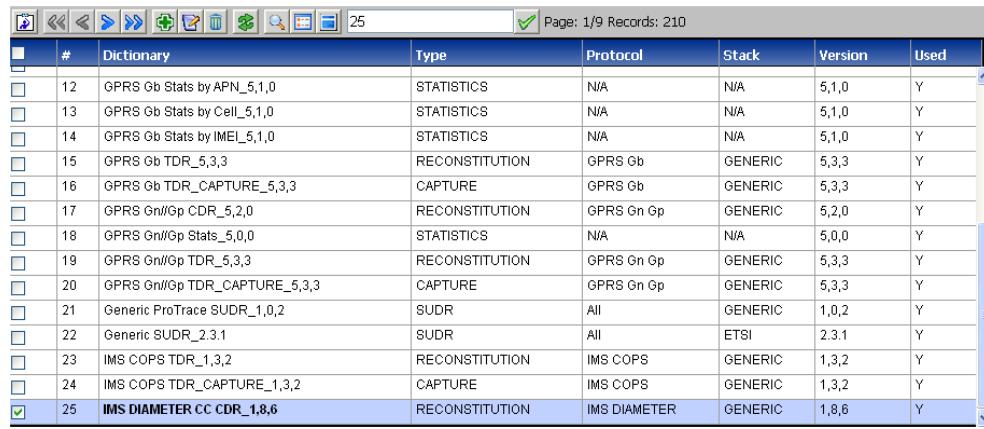


#	Dictionary	Type	Protocol	Stack	Version	Used
12	GPRS Gb Stats by APN_5,1,0	STATISTICS	N/A	N/A	5,1,0	Y
13	GPRS Gb Stats by Cell_5,1,0	STATISTICS	N/A	N/A	5,1,0	Y
14	GPRS Gb Stats by IMEI_5,1,0	STATISTICS	N/A	N/A	5,1,0	Y
15	GPRS Gb TDR_5,3,3	RECONSTITUTION	GPRS Gb	GENERIC	5,3,3	Y
16	GPRS Gb TDR_CAPTURE_5,3,3	CAPTURE	GPRS Gb	GENERIC	5,3,3	Y
17	GPRS Gn/Gp CDR_5,2,0	RECONSTITUTION	GPRS Gn Gp	GENERIC	5,2,0	Y
18	GPRS Gn/Gp Stats_5,0,0	STATISTICS	N/A	N/A	5,0,0	Y
19	GPRS Gn/Gp TDR_5,3,3	RECONSTITUTION	GPRS Gn Gp	GENERIC	5,3,3	Y
20	GPRS Gn/Gp TDR_CAPTURE_5,3,3	CAPTURE	GPRS Gn Gp	GENERIC	5,3,3	Y
21	Generic ProTrace SUDR_1,0,2	SUDR	All	GENERIC	1,0,2	Y
22	Generic SUDR_2,3,1	SUDR	All	ETSI	2,3,1	Y
23	IMS COPS TDR_1,3,2	RECONSTITUTION	IMS COPS	GENERIC	1,3,2	Y
24	IMS COPS TDR_CAPTURE_1,3,2	CAPTURE	IMS COPS	GENERIC	1,3,2	Y
25	<b>IMS DIAMETER CC CDR_1,8,6</b>	RECONSTITUTION	IMS DIAMETER	GENERIC	1,8,6	Y

Figure 261: Dictionary List with Unused Dictionary Selected

3. Select the **View Discrepancy Report** button on the tool bar to generate the report (last button on the right). The *Report* screen opens.

The Report shows:

- Basic Information
- Non-ENUM Field(s) Descrepancies
- ENUM Field(s) Descrepancies

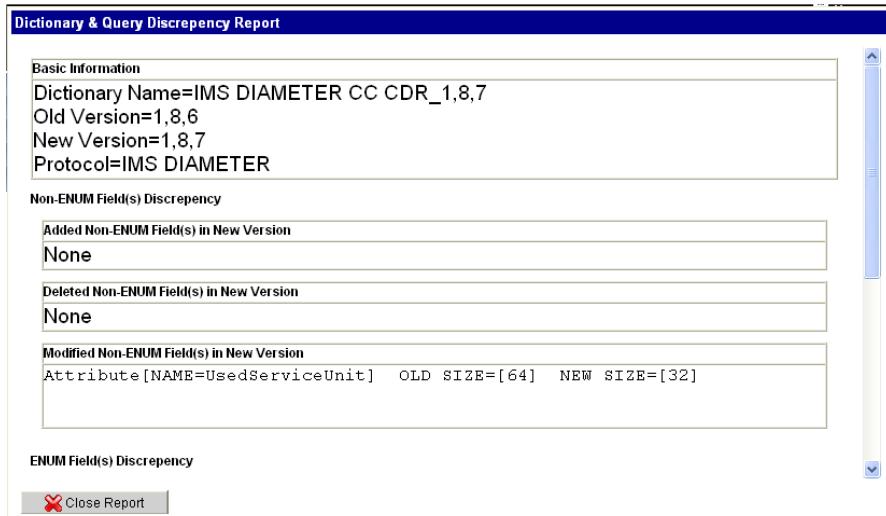

Dictionary & Query Discrepancy Report

**Basic Information**

Dictionary Name=IMS DIAMETER CC CDR\_1,8,7  
Old Version=1,8,6  
New Version=1,8,7  
Protocol=IMS DIAMETER

**Non-ENUM Field(s) Discrepancy**

Added Non-ENUM Field(s) in New Version  
None

Deleted Non-ENUM Field(s) in New Version  
None

Modified Non-ENUM Field(s) in New Version  
Attribute [NAME=UsedServiceUnit] OLD SIZE=[64] NEW SIZE=[32]

**ENUM Field(s) Discrepancy**


 Close Report

Figure 262: Unused Dictionary Discrepancy Report

4. Click the **Close Report** to close the report.

## About xDR Filters

xDR Filters are treated as global entities. xDR Filters are needed when:

- A subset of the generated xDRs are operated on or stored where xDRs matching a condition can be filtered out.

The figure below shows the xDR Filters List screen.

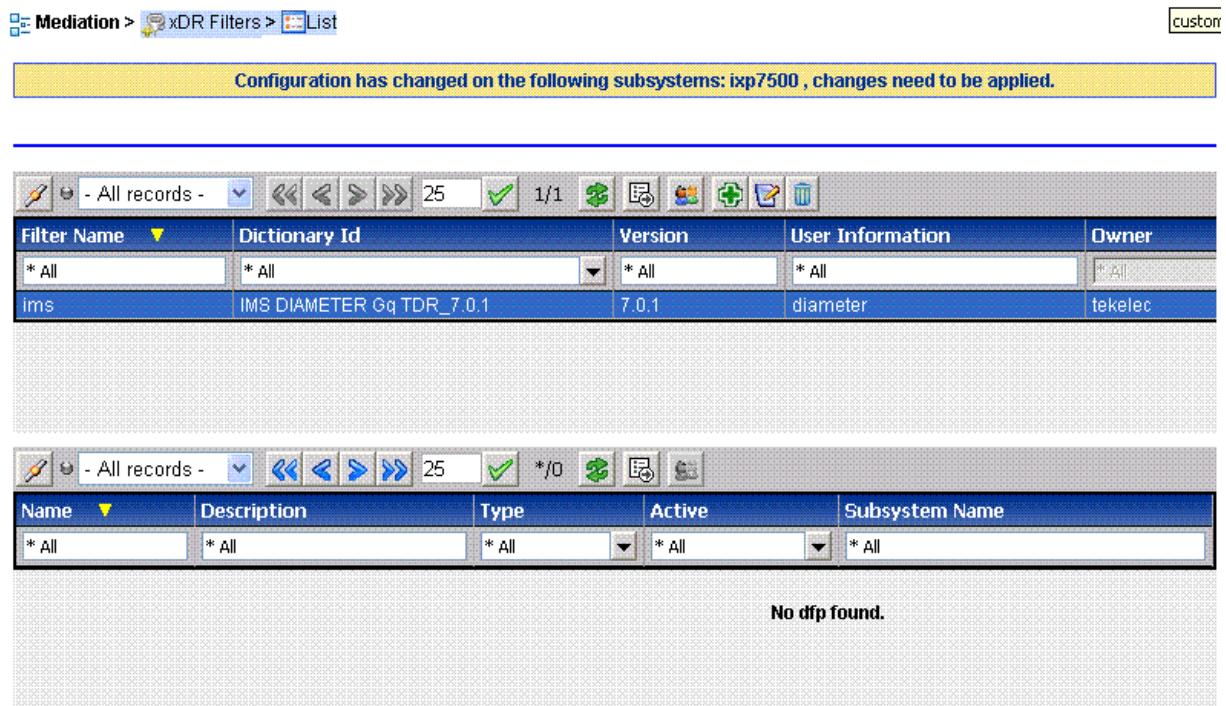


Figure 263: Xdr Filter List Screen

The child window at end of screen shows the information about associated DFPs with xDR Filter selected in master window. Figure below shows the sample screen

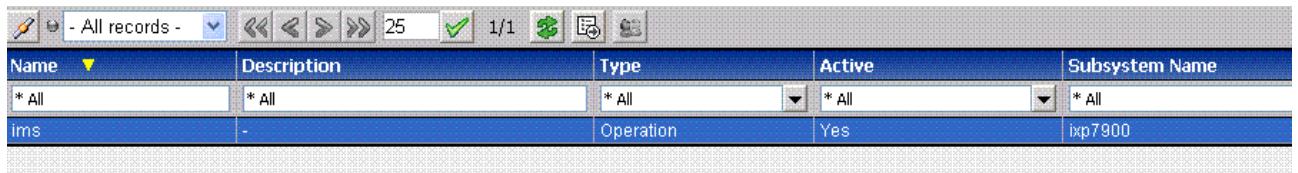


Figure 264: Associated DFP List

## Adding xDR Filters

Complete these steps to add an xDR filter.

1. Select **xDR Filters**.  
The *xDR Filter List* screen opens.
2. Click **Add** (or right click on the xDR Filters object tree).  
The *xDR Filter Add* screen opens show below.

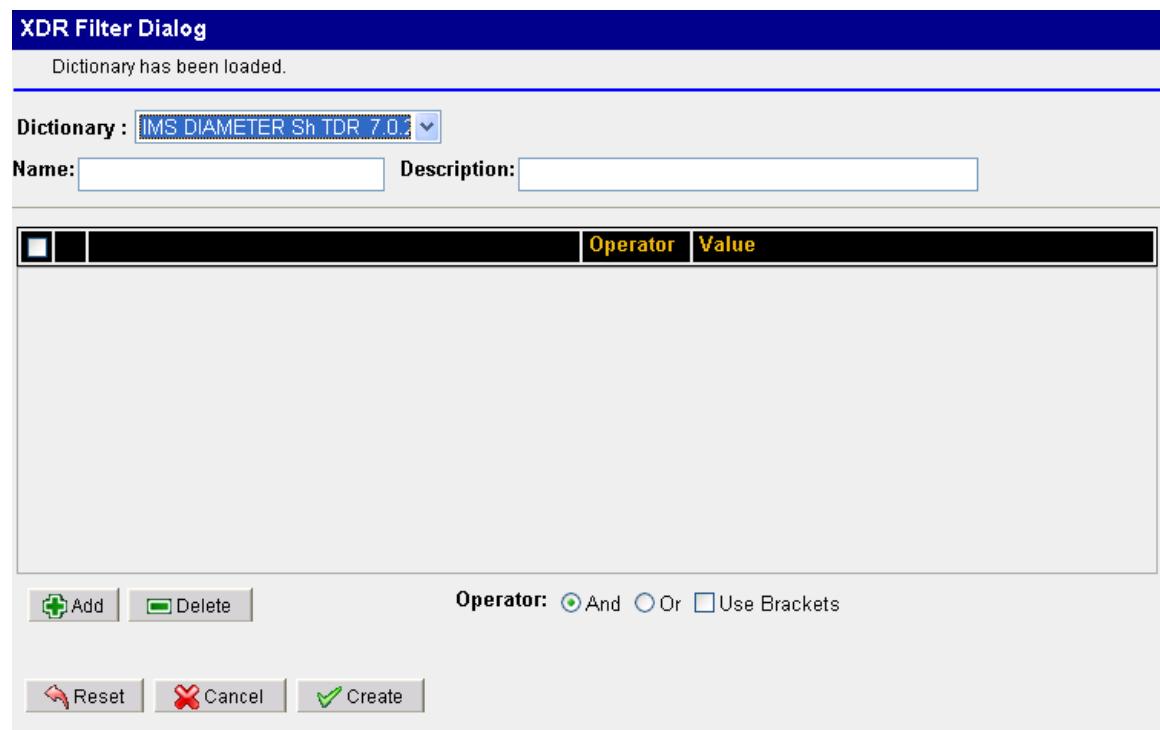


Figure 265: Xdr Filter Add Screen

3. Type in a **Filter Name**.
4. (Optional) Type in a description.
5. Select the **Dictionary** that is associated with the filter.
6. **Create** the Filter.
  - a. Click **Add**.

(not shown in the figure above). The Field Definition fields open shown below.

**Note:** The *Filter* screen provides an automatic operator selection with a default to and. You can choose one of the other two operators if you need them when creating filters with several expressions.

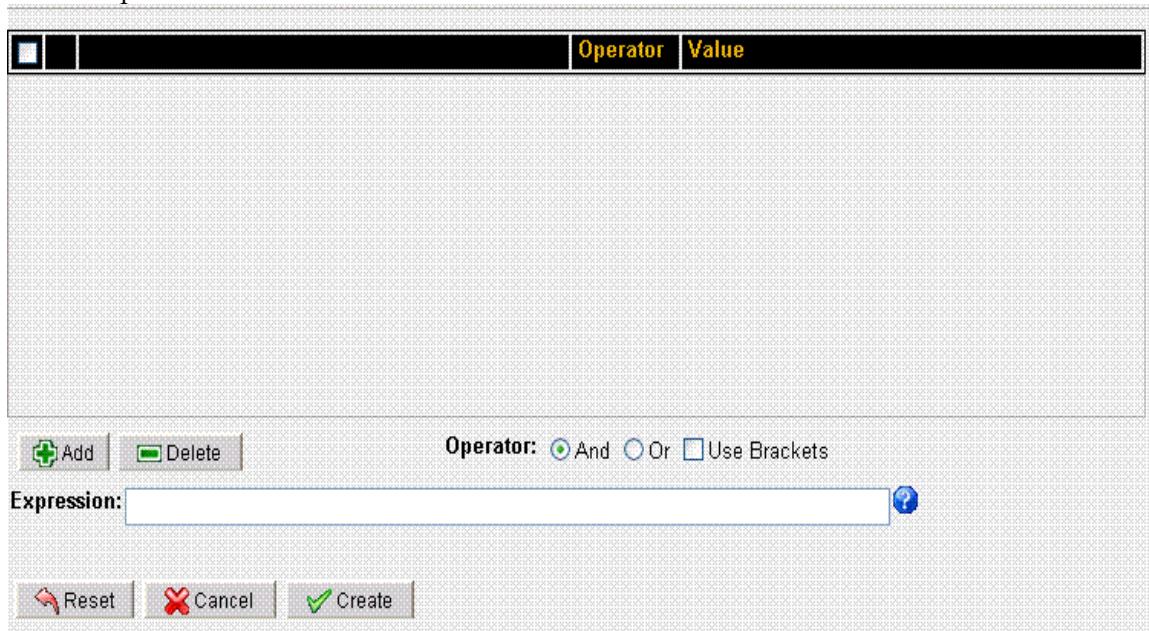



Figure 266: Filter Definition Screen

- b. b) Select a **Field** from the pull-down list.
- c. Select an **Operator** from the pull-down list.
- d. Select a **Value** from the pull-down list.
- e. Repeat steps b-d to create more expressions.

**Note:** Each expression is labeled A, B, C... with the operator between them. For example, A AND B, B OR C are examples of simple expressions.

#### 7 Click **Create**.

The *Filter* is created and saved to the system shown below.

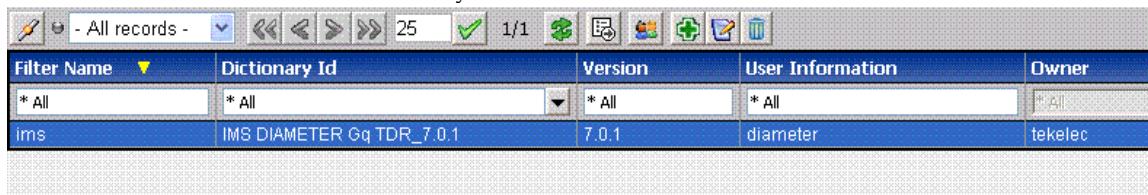

Filter Name	Dictionary Id	Version	User Information	Owner
* All	* All	* All	* All	tekelec
ims	IMS DIAMETER Gq TDR_7.0.1	7.0.1	diameter	

Figure 267: Added Xdr Filter To List

## Modifying xDR Filters

Complete these steps to modify an xDR Filter:

1. Select **xDR Filters**.  
The *xDR Filter List* screen opens.
2. Select the **xDR Filter** to be modified.
3. Click **Modify** (or right click on the specific xDR Filter object tree).  
The *xDR Filter Modify* popup opens.
4. Make the **necessary modifications**.
5. Click **Modify**.  
The *xDR Filter* is modified.

## Deleting xDR Filters

**Note:** You cannot delete an xDR Filter if it is used in a dataflow processing. You must first delete the *Dataflow Processing* or any other dependent object before you can delete the filter.

Complete these steps to delete an xDR Filter:

1. Select **xDR Filters**.  
The *xDR Filter List* screen opens.
2. Select the **xDR Filter** to be deleted.
3. Click **Delete** (or right click on the specific xDR Filter object tree).
4. Click **OK** at the prompt.  
The *xDR Filter* is deleted from the list.

**Note:** Please refer


[Appendix E: xDR Filters during Protocol Upgrade](#) for behavior during Protocol Upgrade.

## About Sessions

The Sessions menu option provides a convenient means of viewing discovered sessions as well as viewing statistical information on a session that is used by the NSP applications such as: *ProTraq*, *ProPerf* and *ProTrace*. CCM enables you to create, modify and delete xDR Sessions globally.

**Note:** A Session name must be unique for each IXP Subsystem or Dataserver, but Sessions can have identical names if they reside on separate IXP Subsystems.

Selecting the Sessions object from the Object tree opens the xDR Sessions List screen. The Start Date, End Date, xDRs per second, Rate in kbps information is updated every minute by an oracle job running in the background. To display the updated information click refresh button in the session list toolbar. Last Refreshed On label in the session list toolbar displays the time when Refresh button was last clicked.

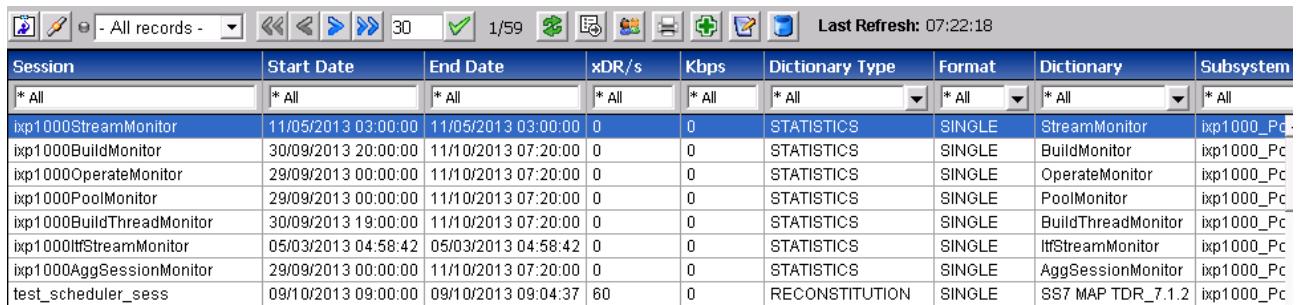

Session	Start Date	End Date	xDR/s	Kbps	Dictionary Type	Format	Dictionary	Subsystem
* All	* All	* All	* All	* All	* All	* All	* All	* All
ixp1000StreamMonitor	11/05/2013 03:00:00	11/05/2013 03:00:00	0	0	STATISTICS	SINGLE	StreamMonitor	ixp1000_Pc
ixp1000BuildMonitor	30/09/2013 20:00:00	11/10/2013 07:20:00	0	0	STATISTICS	SINGLE	BuildMonitor	ixp1000_Pc
ixp1000OperateMonitor	29/09/2013 00:00:00	11/10/2013 07:20:00	0	0	STATISTICS	SINGLE	OperateMonitor	ixp1000_Pc
ixp1000PoolMonitor	29/09/2013 00:00:00	11/10/2013 07:20:00	0	0	STATISTICS	SINGLE	PoolMonitor	ixp1000_Pc
ixp1000BuildThreadMonitor	30/09/2013 19:00:00	11/10/2013 07:20:00	0	0	STATISTICS	SINGLE	BuildThreadMonitor	ixp1000_Pc
ixp1000IffStreamMonitor	05/03/2013 04:58:42	05/03/2013 04:58:42	0	0	STATISTICS	SINGLE	IffStreamMonitor	ixp1000_Pc
ixp1000AggSessionMonitor	29/09/2013 00:00:00	11/10/2013 07:20:00	0	0	STATISTICS	SINGLE	AggSessionMonitor	ixp1000_Pc
test_scheduler_sess	09/10/2013 09:00:00	09/10/2013 09:04:37	60	0	RECONSTITUTION	SINGLE	SS7 MAP TDR_7.1.2	ixp1000_Pc

Figure 268: xDR Sessions List Screen

## About xDR Session Table Layout

The *Sessions List* screen is in table format and has the following information:

Column	Description
Select	Enables you to select one or more sessions
Session	Provides the name of the session
Start Date	The start date and time for the session
End Date	The end date and time for the session
xDRs per Second (xDR/s)	Number of records inserted per second, during the last active full minute
Rate in kbps	Rate in kilobits per second, during the last active full minute
Type <sup>e</sup>	Shows the type of session: <ul style="list-style-type: none"> <li>Reconstitution</li> <li>Capture</li> <li>Statistics</li> <li>SUDR</li> </ul>
Format	Shows the type of format the session is in.
Dictionary	Shows the name of the dictionary associated with the session
Host	Shows the name of the host that houses the dictionary and the session
Lifetime	Shows how long, in hours, the session is scheduled to run
Sequence ID	Shows if the session is enabled or disabled
User Information	Provides additional information about the session
Owner	Shows the name of the user who created the session
State	Shows the state of the session
Replace by	Shows the name of the user who has altered the session
Created	Shows the date and time the session was created

TABLE 99: XDR TABLE LAYOUT

## Listing xDR Sessions

Complete these steps to list xDR sessions.

1. Select **Mediation > Sessions**
2. Right-click and select **List**.

The *List* screen opens.

The *xDR Session* screen toolbar has the following function buttons:

Button/Label	Description
Select Columns	Enables you to select the columns you want to view
First Page	Enables you to go to the first page of a mult-page list of sessions
Previous page	Enables you to go to the previous page of a mult-page list of sessions
Next page	Enables you to go to the next page of a mult-page list of sessions
Last page	Enables you to go to the last page of a mult-page list of sessions
Add	Enables you to add a session
Modify	Enables you to modify a session
Delete	Enables you to delete a session
Refresh	Enables you to refresh a screen to view any changes you have made
Filter sessions	Opens the filter query screen and enables you to search for specific sessions
Permissions	Enables you to set permissions for different users (write, read, execute)
Modify session backup	Enables you to select one or more sessions in order to modify session backup options
Last refresh	Displays the last refresh time of the list

TABLE 100: xDR TOOL BAR

**Note:** Last calculated time shown as a tooltip for Start date, End date, xDR/s, Kbps columns denotes the last update time from IXP

### Adding a Protocol-Specific xDR Session

A protocol-specific xDR Session must be created to house the xDRs for that protocol.

Once xDR generation is configured for a builder, xDR Records are stored in a session. A session is associated with a *Dictionary*. The *Dictionary* mechanism is a way of describing the content of the xDR fields. NSP applications, such as *ProTrace* use the *Dictionary* to access and display the data making the applications independent of the xDR Record format.

Complete these steps to add a protocol-specific xDR Session:

1. Select **Mediation > Sessions**.  
The *xDR Sessions List* screen opens.
2. Click **Add** from the toolbar.  
The *Add* screen opens shown below.

The screenshot shows the 'xDR Session Add Screen' with the following details:

- Session Name:** Sample\_Session
- Lifetime (hours):** 72
- Storage:** ixp5001-1a
- Dictionary:** 8951|monica\_sess
- Description:** This is an example of a session
- Buttons:** Reset, Cancel, Add

Figure 269: xDR Session Add Screen

3. Type a **Session Name**.

**Note:** The session name must be unique for each IXP subsystem, but sessions can have identical names if they reside on separate IXP subsystems.


4. Type in the **Lifetime** (number of hours the session exists).

**Note:** It is recommended that the *Lifetime* not be less than 48 hours. Anything less than 48 hours can lead to potential data loss or truncation of last 24 hours due to nightly purges of the system.

**Note:** Adding more than five (5) sessions in one 24 hour period may cause xDR storage degradation. Please consider spacing your session additions over several days to ensure xDR storage performance.

5. Select the **Storage Subsystem**.6. Select the **Dictionary** associated with the session.7. (Optional) Type in a **Description**. Shown below is a completed session.8. Click **Add**.

The *Session* is added to the *Session List* shown below.

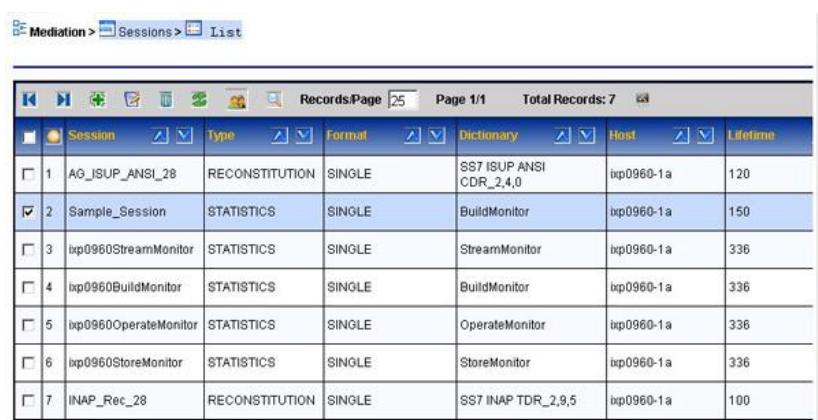

	Session	Type	Format	Dictionary	Host	Lifetime
<input type="checkbox"/>	1 AG_ISUP_ANSI_28	RECONSTITUTION	SINGLE	SS7 ISUP ANSI CDR_2,4,0	ixp0960-1a	120
<input checked="" type="checkbox"/>	2 Sample_Session	STATISTICS	SINGLE	BuildMonitor	ixp0960-1a	150
<input type="checkbox"/>	3 ixp0960StreamMonitor	STATISTICS	SINGLE	StreamMonitor	ixp0960-1a	336
<input type="checkbox"/>	4 ixp0960BuildMonitor	STATISTICS	SINGLE	BuildMonitor	ixp0960-1a	336
<input type="checkbox"/>	5 ixp0960OperateMonitor	STATISTICS	SINGLE	OperateMonitor	ixp0960-1a	336
<input type="checkbox"/>	6 ixp0960StoreMonitor	STATISTICS	SINGLE	StoreMonitor	ixp0960-1a	336
<input type="checkbox"/>	7 INAP_Rec_28	RECONSTITUTION	SINGLE	SS7 INAP TDR_2,9,5	ixp0960-1a	100

Figure 270: Completed Session In Session List

## Modifying an xDR Sessions

1. Select **Mediation > Sessions**.

The *Sessions List* screen opens.

2. Select the **Session** to be modified, shown here.


	Session	Type	Format	Dictionary	Host	Lifetime
<input checked="" type="checkbox"/>	1 Sample_Session	CAPTURE	SINGLE	SS7 AIN TDR_CAPTURE_2,6,1	ixp5001-1a	72
<input type="checkbox"/>	2 Sample_Session_1	RECONSTITUTION	SINGLE	SS7 AIN TDR_2,6,1	ixp5001-1a	72
<input type="checkbox"/>	3 ixp5001StreamMonitor	STATISTICS	SINGLE	StreamMonitor	ixp5001-1a	336

Figure 271: Selected Session For Modification

3. Click **Modify** on the toolbar.

The *Session Record* opens, shown below.

Session Name	Lifetime (hours)	Storage
Sample_Session	72	ixp5001-1a
Dictionary		
SS7 AIN TDR_CAPTURE_2,6,1		
Sequence Id		
<input type="checkbox"/> Enabled		
Description		
<div style="border: 1px solid black; height: 100px; width: 100%;"></div>		
<input type="button" value="Reset"/> <input type="button" value="Cancel"/> <input type="button" value="Modify"/>		

Figure 272: Modify Session Screen

4. You can only modify the **Lifetime** (hours), **Sequence ID** or the **Description** fields.
5. Click **Modify**.  
The Record is modified.

## Deleting xDR Sessions

Complete these steps to delete an xDR session:

**Note:** You cannot delete a *Session* that is using a *Dataflow Processing*. You must first delete the *Dataflow Processing* or modify the *Dataflow Processing* to use another *Session*.

**Note:** Important--When you delete a *Session* on CCM, the *Session* also gets deleted in the IXP database causing all the xDRs stored in the *Session* also to be deleted.

**Note:** If a Session is deleted all the system backups will also be deleted from the system.

1. Select **Mediation > Sessions**.  
The *Sessions List* screen opens.
2. Select the **Session** to be deleted.
3. Click **Delete**.
4. Click **OK** at the prompt. The *Session* is deleted.

## Purging Static Sessions

There are times when it is necessary to purge static sessions from the IXP subsystem by using the `ManageStaticPurge.sh` command.

Complete these steps to purge static xDR sessions from the IXP subsystem:

1. **Log into the Oracle database.** (`./ManageStaticPurge.sh <connection> <option>`)  
Must use Oracle *user-id* and *password* (*password@db\_stirng*).
2. Enter one of the following **command** options:  
`./ManageStaticPurge.sh`  
`-c#` create the job  
`-r#` remove the job  
`-d#` disable the job  
`-e#` enable the job  
`-m#` modify the job: = new job frequency in hours
3. **Log Out** of the Oracle database.

## Creating an xDR filter for an existing Session

You can create a Filter for an existing xDR Session using the Filter sessions button on the toolbar shown below.



Figure 273: Xdr Session Filter Icon

Clicking on the button opens the filter screen. For more information, see "[Adding xDR Filters](#)."

## Modifying xDR Session Backups

CCM enables you to modify *Session Backup* options. Complete these steps to modify an existing *Session Backup*:

1. Select **Mediation > Sessions**.  
The *Sessions List* screen opens.
2. Select the **Session** to be modified.
3. Click **Modify Backup** from the toolbar shown below.  
The *Modify Backup* screen opens.



Figure 274: Modify Session Backup Toolbar

4. Select the **Backup** option (none, xDR only, xDR and PDU) from the pull-down list.
5. Click **Modify**.  
The *Backup* option is modified for that session.

## Creating and associating a dictionary with a Session

Complete these steps to create and associate a dictionary with an xDR Session:

1. Select and right-click on the **IXP Subsystem** that needs the sessions.
2. Select **Discover Sessions**.  
The discovery process begins and the *Sessions List* screen opens shown below.

The screenshot shows the 'Discover Sessions' screen with the following details:
 

- Toolbar buttons: Back, Forward, New, Open, Save, Print, Filter, Copy, Paste, Find, Refresh, and Help.
- Text fields: 'Records/Page' (50), 'Page 1/1'.
- Table headers: Session Name, Remote Status, NSP Status, Action Remark, Type, Dictionary, Actions.
- Table data:
 

	Session Name	Remote Status	NSP Status	Action Remark	Type	Dictionary	Actions
1	AG_ISUP_ANSI_28	✓	✓	No change found in session	RECONSTITUTION	SS7 ISUP ANSI CDR_2,4,0	Discover Session
2	INAP_Rec_28	✓	✓	No change found in session	RECONSTITUTION	SS7 INAP TDR_2,9,5	Discover Session

Figure 275: Sessions List

3. Select a **Session**.
4. Click **Create/Associate Dictionary** that belongs to that session (Actions column - Discover Session).

**Note:** If there is already more than one *Session* associated with a *Dictionary*, you can select another Session from the pull-down list from the Associate with existing Dictionary and discover Session field and click **Apply Dictionary & Discover Session**.

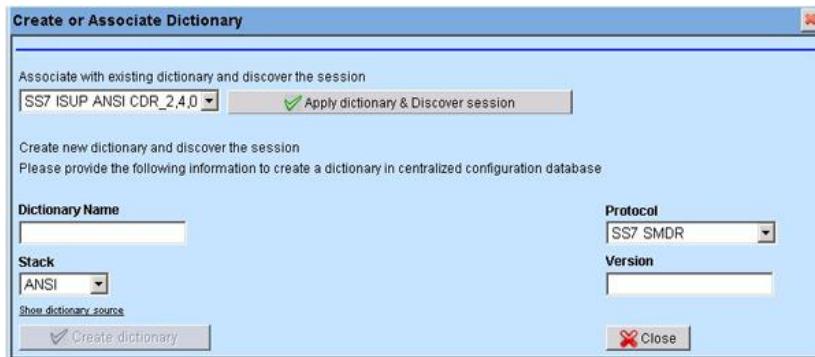


Figure 276: Associate Dictionary Screen

5. Enter the **Dictionary Name**.
6. Select the **Stack** for the Dictionary.
7. Select the **Protocol** for the Dictionary.
8. Enter a **Version Number** for the Dictionary.
9. Click **Create Dictionary**.

The *Dictionary* is created shown below.

**Note:** You must now synchronize the subsystem to apply changes. For more information see, "[About Applying Changes to a Subsystem \(Synchronizing\)](#)".

## xDR Builder Parameters

Each Build xDR session of a dataflow processing has a set of parameters that are set by default but can be customized for your system. Refer to Appendix C "xDR Builder Parameters" for descriptions of builder fields.

## About Enrichment Files

Enrichment files are files with fse extension that enable you to populate xDRs with additional fields. These fields are used by *ProTraq*.

Selecting the **Enrichment Files** object from the Object tree opens the Enrichment Files List screen.

#	File Name
1	testfse

Figure 277: Enrichment Files List Screen

## Adding Enrichment Files

Complete these steps to add enrichment files:

1. Select **Mediation > Enrichment Files**.  
The *xDR Sessions List* screen opens.
2. Click **Add** from the toolbar.  
The *Add* screen opens.



Figure 278: Xdr Session Add Screen

3. Click **Browse....**
4. Locate the file **fse file** in its directory.
5. Click **Upload**.  
The File is uploaded into the system.

### Deleting Enrichment Files

Complete these steps to delete enrichment files:

**Note:** Before deleting *Enrichment Files*, you must first delete any dependent objects belonging to the *Enrichment File*. You must also **Apply Changes** to the Subsystem before the changes take place.

1. Select **Mediation > Enrichment Files**.  
The *Enrichment Files List* screen opens.
2. Select the **File** to be deleted.
3. Click **Delete** from the tool bar.
4. Click **OK** at the prompt.  
The *File* is deleted from CCM.
5. Click **Upload**.  
The *File* is uploaded into the system.

### Viewing Enrichment File Source Code

Complete these steps to view enrichment files source code:

1. Select **Mediation > Enrichment Files**.  
The *Enrichment Files List* screen opens.
2. Select the **File** to be viewed.
3. Click **Source** from the tool bar.  
The *Source* screen opens.

```

File Contents

SECTION:MAIN
DLL:FSEMAP
MODE:AFTER

SECTION:MAPPING
INPUT:UnitsCount
DEFAULT:999

OUTPUT:User1
MAP:0:000
MAP:1:111
MAP:2:101
MAP:3:010

```

Figure 279: Source Code Screen

4. Click **Close** to close the screen.

## Defining Enrichment file automated update

Complete these steps to define enrichment file automated update SFTP location:

1. Select **Mediation > Enrichment Files**.

The *Enrichment Files List* screen opens

2. Click on automated update button in list toolbar .

The *FSE Auto Update Configuration* screen opens.

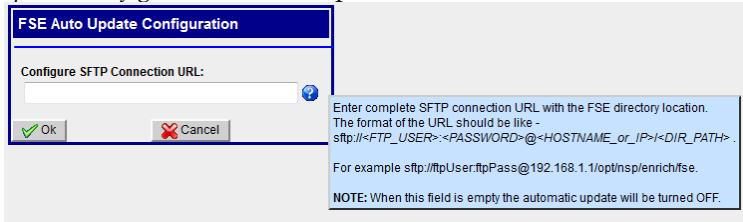


Figure 280: FSE automated update configuration screen

This settings refer to an SFTP location where system can find Enrichment FSE file.

URL should be like `sftp://<USER>:<PASSWORD>@<HOSTNAME_OR_IP>/<PATH>` where

- <USER> is username of SFTP server
- <PASSWORD> is password of SFTP user
- <HOSTNAME\_OR\_IP> is address of SFTP server
- <PATH> is relative path under user home folder in SFTP server

**Note:** Empty string turns off automated update

NSP scan regularly this folder and its subfolder (every 30 mn) to find files with same name as the those declared. In this case it loads file to replace existing FSE and reapply it automatically to selected session.

3. Click **OK** to validate changes.

**Note:** See Appendix F for typical FSE enrichment file

## Chapter 10: Monitoring Policies

---

### About 3G Monitoring Policies

CCM is equipped with Intelligent Data Monitoring (IDM) for 3G. IDM enables customization of the PIC system to fit the amount of system traffic while providing two important parameters for on demand customer care:

- Less data to transfer to mediation (IXP) layer for less data to process and store.
- Accurate and efficient traffic monitoring.

xMF enhancement provides the capacity to reduce the traffic sent to IXP by sending all PDUs for on demand or sampled users. This capacity also enables load balancing between multiple IXP servers that results in more efficient traffic monitoring.

### The Monitoring Policies Screen

The monitoring policies List screen is comprised a tool bar and two tables.

Besides the basic functions of adding, modifying and deleting selected users it has the additional functions:

- Filtering - the Filtering button provides the capacity to filter for specific policies.
- Traffic Classifications - the Show Traffic Classification button shows the classifications for specific policies. The traffic classifications for a specific policy appear on the bottom table.
- Activating and deactivating - the Activate and Deactivate buttons provide the capacity to activate or deactivate specific policies.

The policy (top) table provides the following information:

- Policy Name - name of policy.
- Description - brief description of policy.
- Policy Status - active or not.
- On Demand - on demand is on or off.
- Sampling - sampling is on or off.
- Sampling Ratio - sampling ratio of mobile users.
- Track Statistics - statistics for tracking sampled mobile users.
- Owner - user who created policy.
- State - activated or not.
- Created - date created.

The Traffic Classification (TC) table shows the following information for a selected policy:

- TC Name - shows the name of the TC for associated with the policy.
- Description - shows any pertinent information about the TC.
- Server - shows the server where the TC is located.
- Internet Protocol - shows the protocol constraints for the TC.
- Transport Protocol - shows the type(s) of transport protocol(s) for the TC.
- Application Layer - shows the GTP layer IP address.
- Forwarding - shows what is forwarding (for example, packets and counters).
- Annotations - Any special annotation for the traffic classification.
- Status - shows if the traffic classification is active or not.

### Adding a Monitoring Policy

Prerequisites:

- PDU Filter (VLAN Filter) is created.

- Traffic Classifications are created.
- IP Dataflows are created with load balancing and GTP algorithms.
- Dataflow Processings are created with appropriate builders (Gn/Gp mobile activity, IP HTTP TDR, IP MMS TDR and/or Gn/Gp TDR).

Complete the following steps to add a Monitoring Policy:

1. Select **Monitoring Policies > 3G Policies**.
2. Click **Add** from the tool bar on the policies table.  
The *Add Policies* screen opens.

**Note:** Black arrows to the left of the fields signify if the field is expanded or not (Down is expanded).

Field	Description
Name	Alphanumeric field for adding name (limit 25 characters)
Description (Optional)	Text field for adding pertinent information (limit 255 characters)
On Demand	Default = No Check box select if you want to forward the user plane traffic for the mobile devices that are in demand by Customer Care (See Customer Care User Guide)
Sampling	Default = No Checkbox select yes to allow IPDR creation for a random sample of mobile users. PMF sends FULL control plane and FULL user plane packets for the selected traffic.
What is the percentage of mobile users	Numeric field that enables you to put in a percentage (0-100) that will be sampled (see sampling description)
Forward Statistics	Default = No Check box select "yes" enables IPDR creation for mobile users identified as to track activity statistics for all mobile users that are "on-demand" or sampled PMF sends FULL control plane and FULL user plane packets for the selected on-demand users.
GTP-C-TCs	<ul style="list-style-type: none"> <li>• Shows available GTP-C-TCs to be used with the policy. Multiple GTP-C-TCs can be selected</li> <li>• Shows selected GTP-C-TCs for the policy.</li> </ul>
GTP-U-TCs	<ul style="list-style-type: none"> <li>• Shows available GTP-U-TCs to be used with the policy. Multiple GTP-U-TCs can be selected</li> <li>• Shows selected GTP-U-TCs for the policy</li> </ul>

TABLE 101: ADD POLICIES SCREEN FIELD DESCRIPTIONS

3. Enter the **Name** of the policy.
4. (Optional) Enter a **Description**.
5. If the policy is to be *On Demand*, select **Yes**.
6. If the policy is to have *Sampling* capabilities, select **Yes**.
7. If the policy is to have *Forward Statistics* capabilities, select **Yes**.
8. (Optional) Select **GTP-C-TCs** that will be associated with the Policy.
9. (Optional) Select **GTP-U-TCs** that will be associated with the Policy.
10. Click **Add** to add the Policy to the system.

## Modifying a Monitoring Policy

Complete the following steps to modify a monitoring policy:

1. Select **Monitoring Policies > 3G Policies**.
2. Select the **Policy** to be modified from the *Policy* (top) table.
3. Click **Modify** from the tool bar.
4. Modify the **appropriate values**.
5. Click **Modify**.  
The database is updated with the change.

## Deleting a Monitoring Policy

Complete these steps to delete a monitoring policy:

1. Select **Monitoring Policies > 3G Policies**.
2. Select the **Policy** to be deleted
3. Click **Delete**.
4. Click **OK** at the prompt.

The *Policy* is deleted.

## Activating and Deactivating Monitoring Policies

To activate or deactivate a Monitoring Policy complete these steps:

1. Select **Monitoring Policies > 3G Policies**.
2. Select the **Policy(s)** to be activated or deactivated.
3. Click the **appropriate button (activate/deactivate)** on the tool bar.
4. Click **OK** at the prompt.
5. Click **Apply** to initiate the filtering operation.

## About Filtering Monitoring Policies

In large systems there can be a large number of monitoring policies. CCM is equipped with a filtering function, located on the Monitoring Policy tool bar, to filter policies by specific criteria using expressions.

**Note:** The filtering function is applied for immediate use and cannot be saved.

## Filtering Monitoring Policies

Complete the following steps to use the filtering operation:

1. Select **Monitoring Policies > 3G Policies**.
2. Click **Filter Policies** from the tool bar on the policies table.  
The *IdmPolicies Filter* screen opens.
3. Click **Add**.  
The screen changes to show the Expression line.

**Note:** The expressions are in alphabetical order beginning with "A." Each expression has selected a field, operator and value fields. Multiple expressions can be used to make the search as specific as possible.

**Note:** When using multiple expressions, choose the appropriate Operator (And, Or, Use Brackets). The Expression field at the bottom of the screen will show all expressions used with their operators.

4. Select the **Field(s)** to be used in the expression.
5. Select the appropriate **Operator** for the expression.
6. Select the appropriate **Value** for the expression.
7. Repeat steps 4-6 in multiple expressions are needed in the filtering operation.
8. Click **Apply** to initiate the filtering operation.

**Note:** Mobiles and Access Points are created "on the fly" and are not saved.  
The results of the filtering operation are listed in the policies table screen.

## Appendix A: Configuration Workflows

---

### Provisioning Guide for Configuring a PIC System

This outline represents the main steps in configuring a PIC system using CCM.

Creating sites (see [Sites](#))

- Discover Legacy subsystems and create destinations if traffic needs to be routed to them.
- Discover xMF subsystem (see [About xDR Filters](#) and [Adding a PMF Subsystem to a Site](#)).
- Discover IXP subsystem (see [Site Creation and Discovery Process](#)).
- Discover DWH subsystems (if external DWH is present or else DWH gets discovered as a part of IXP) see [Site Creation and Discovery Process](#).

**Discovering or manually configuring (for PMF) Network Elements** (see [Adding a PMF Subsystem to a Site](#) and [Modifying a PMF Subsystem Host](#))

**Configure Network Views** (see [Network View Configuration](#))

**Configure xMF Subsystem** (see [xMF Acquisition](#))

**If configuring an IMF Subsystem:**

- Assign Linksets for Monitoring Groups (see [About Monitoring Groups \(IMF\)](#)).
- Assign Linksets to Network Views (see [Adding an SS7 Linkset to a Link View](#)).
- Create Dataflows (see [About PDU Dataflows](#)).
- Assign Linksets to Dataflows.
- Route Dataflows to Input Streams on IXP\*/Legacy systems.
- Create and configure Associations (IMF or PMF).

**If configuring an IXP subsystem:**

- Create (route) input streams on that IXP subsystem.
- Use Dataflow processings (DFP) wizard to create DFPs.

OR

- If creating DFPs manually on that IXP subsystem, then create them in the following order:
  - Build.
  - Operate.
  - Store.
- Create the distribution on that IXP Subsystem for load balancing or during server maintenance.
- Create the Sessions on that IXP Subsystem.
- Manage the Subsystem preferences for that IXP subsystem see [About Subsystem Preferences](#).

### Setting up PIC Sites

This procedure must be followed by users who are setting up the PIC System for the first time, adding new PIC Servers or adding new applications on an existing Server.

Complete these steps (and refer to sections for detailed information), for setting up a PIC System:

1. Create a Site.  
(See [Creating a Node](#)). Now you can add a host.
2. Add an IXP subsystem (see [Adding an IXP Subsystem](#)).
3. Add an IMF subsystem (see [Adding an IMF Subsystem to a Site](#)).
4. Add a PMF subsystem (see [Adding a PMF Subsystem to a Site](#)).

## SS7 Data Acquisition Using IMF

Complete these steps when adding an IMF Subsystem:

1. Create a Site, Hosts and Applications (see [Setting up PIC Sites](#)).
2. Ensure the Eagle is set up to communicate with the IMF (see [About xDR Filters](#)).
3. Discover the Network Elements from the IMF subsystem.  
At the end of this operation, a list showing the discovered Network Elements is displayed. You can also view the Network Elements from either the Home screen (see [Network Elements](#)) or from Network Elements Object Tree Perspective.
4. Distribute the discovered linksets to the IMF Applications that are part of the Subsystem by assigning selected linksets to each IMF Application.

Care must be taken to ensure that traffic is distributed evenly across the available IMF servers. A common practice is to assign one of the Servers as a spare server and not assign any linksets to it.

When one of the active IMF Servers fails, the linksets monitored by the failed server are automatically switched over to the spare Server.

**Note:** Repeat steps 3-4 whenever new linksets have been added to IMF.

## SS7 Data Acquisition Using PMF

Complete these steps to set up PMF monitoring of an SS7 link:

1. If this is a new PMF subsystem, (see [Setting up PIC Sites](#)) for setting up the site, hosts and applications.
2. Create a node for each end of the link to be monitored, if not already created, (see [About Nodes](#)).
3. Create a SS7 signaling point, if it does not already exist, under each node involved with the link to be monitored.
4. Create a linkset for the link to be monitored, if it does not already exist.  
This can be done from either of the two signaling points (see [Creating a Linkset](#)).
5. Create the SS7 link to be monitored, if it does not already exist.
6. Next, create or discover the PMF card that will do the monitoring under the PMF application if it does not already exist (see [Modifying a PMF Subsystem Host](#)).  
Ensure that the card has the correct firmware load, and set the card's attributes appropriately.
7. Select a port on the PMF card and activate it (see [Adding IP Port PDU Filters](#)).  
Set the port attributes appropriately.
8. Assign the link to the port (see [Adding an SSN Filter](#)).

## GPRS Network Data Acquisition Using PMF

Complete these steps to set up PMF monitoring of a Gb link:

1. Create one node to contain the link's SGSN, if it doesn't already exist, (see [Creating a Node](#)).
2. Create a SGSN signaling point, if it doesn't already exist, under the node (see [Creating and associating a Dictionary with a Session](#)).
3. Create the Gb link to be monitored, if it doesn't already exist, (see [Adding a Gb Link](#)).
4. Select a port on the PMF card and activate it (see [Adding a PMF Subsystem to a Site](#)).  
Set the port attributes appropriately.
5. Assign the Gb link to one or more of the channels belonging to the port (see [About Gb Links](#)).

## IP Network Data Acquisition for PMF

Complete these steps to set up PMF monitoring of an IP network.

1. Create, or discover, the PMF card(s) that will do the monitoring under the PMF application, if it doesn't already exist ( see [Modifying a PMF Subsystem Host](#)).
2. Create one or more Input streams (see [Adding a PDU Stream](#)).  
Use filtering to discard IP traffic not needed.

## Configuring for 3G Intelligent Data Monitoring (IDM)

Complete these steps to configure a PIC system to utilize 3G IDM:

1. Create a VLAN PDU Filter from the acquisition perspective.
2. Create a Traffic Classification, (both GTP-C and GTP-U) that will be associated with the Filter.
3. Create an IP Dataflow (acquisition perspective - IP Dataflows) to route the classified GTP PDUs to the PMF subsystem.
  - a. Select 2 for the number of destinations.

**Note:** If two or more destinations are used, then the same number of DataFlow Processings must be configured at the mediation level for this IP DF.

  - b. Select both GTP options (Algorithms and Destinations).
  - c. Set packet truncation to 0.
4. Associate the GTP-C traffic classification with the IP Dataflow.
5. Apply Changes to the PMF subsystem.
6. From the mediation perspective, create Dataflow Processings using the xDR Dataflow Assistant. Builders to consider are: Gn/GP Mobile Activity, IP HTTP TDR, IP MMS TDR.  
  
**Note:** Gn/GP TDR can be selected if Control Plane xDRs are expected and/or if On-Demand User Plane TDR are expected.
7. Apply Changes to the IXP subsystem.
8. Create a Monitoring Policy.
9. Create either a mobile or access point "on demand" record in Customer Care application.

## Routing PDUs to xDR Builders

These steps are used to route PDUs from IMF or PMF to ICP or IXP. When you assign links, linksets, or create IP Streams, the PDUs are collected by the IMF/PMF and stored in its local cache. After collection then you need to configure the route for the collected data to the xDR Builders for generating xDRs and KPIs.

Complete these steps to route PDUs to xDR Builders:

1. Ensure the linksets/links are assigned.
2. Create link-based network view(s) containing the linksets, links and/or IP streams from which PDUs are collected.  
  
**Note:** If you have a large network, it is recommended that you organize the views in a hierarchical manner. Organizing hierarchically enables you to keep track of the routing process.
3. Define any PDU filters that you need to classify PDUs as described in (see [About PDU Filters](#)).
4. Create a PDU data flow by specifying (for creating different types of Dataflows, see [About Managing Dataflow Processings Manually](#)):
  - a. the type of traffic
  - b. optional filters
5. Select the data flow you created and select the list route option (see [About PDU Dataflows](#)).  
The system displays all the Datasources where the PDUs are being collected and cached for that data flow.
6. Assign the routes by specifying one or more Datasources for every data flow (see [About SS7 Q.752 Dataflows](#)).

## Routing PDUs to xDR Builders for SigTran

These steps are used to route PDUs from IMF or PMF to IXP. When you assign links, linksets , or create IP Streams, the PDUs are collected by the IMF/PMF and stored in its local cache. After collection then you need to configure the route for the collected data to the xDR Builders for generating xDRs and KPIs.

Complete these steps to route PDUs to xDR Builders:

1. Ensure the linksets/links are assigned.
2. Create link-based network view(s) containing the linksets, links and/or IP streams from which PDUs are collected.

**Note:** If you have a large network, it is recommended that you organize the views in a hierarchical manner. Organizing hierarchically enables you to keep track of the routing process.

3. Define a SigTran PDU filter that you need to classify PDUs as described in (see [About PDU Filters](#)).
4. Create a Traffic Classification (TC) and connect the filter to the TC, see [Adding a Traffic Classification \(PMF\)](#).
5. Create a PDU data flow process by specifying (for creating different types of dataflows, see [About Managing Dataflow Processings Manually](#)):
  - a. The type of traffic.
  - b. Optional filters.
6. Select the data flow you created and select the list route option (see [About PDU Dataflows](#)) or traffic classification.  
The system displays all the datasources where the PDUs are being collected and cached for that data flow.
7. Assign the routes by specifying one or more datasources for every data flow (see [About SS7 Q.752 Dataflows](#)).

## Points to consider when creating Routes and Data Flows

- A given IXP input stream cannot receive PDUs coming from more than one IMF server. In addition, the current release of CCM only routes data on a subsystem basis. This may cause a problem if two IMF/PMF servers on a same subsystem are part of the same data flow. In this situation, you must create separate data flows for each IMF/PMF within a subsystem.
- xDR builders cannot handle PDUs that they cannot recognize. For example, if you route ISUP traffic to the LIDB builder, it will fail. Therefore, configure appropriate filtering using the PDU filters.
- An xDR builder running on an IXP can only handle a limited amount of traffic. To distribute the processing across multiple IXP servers, you must apply PDU filtering in order to split the traffic. While configuring such a splitting operation, make sure that the IXP can still correlate the PDUs. For example, you cannot split the ISUP traffic in a such a way that the IAM and the ACM for the same call go to different builders. A number of PDU filters are available to split the traffic properly, and you can use combination filters and raw filters (SS7 only) to design the flows.
- For SS7 networks, RID groups are created and assigned to linksets in order to handle duplicate PDUs. In this situation, while configuring the MSU dataflows, check the option to send the RID ID to the xDR generator.

## Associating Sessions for Link-based Network Views

Since CCM does not configure the xDR generation process, it does not have the information about what link-based network views feed into which xDR sessions. Some applications like *ProTrace* need this information for link-based monitoring and protocol analysis. CCM provides a way to configure the relationship between Datasources and xDR sessions. Once this information is in the database, applications can find the link-based networks views feeding a given xDR session.

**Note:** This step is optional and is only required if you need to use link-based monitoring and protocol analysis which are needed for applications like ProTrace.

1. Follow the procedure for routing PDUs to IXP (see [Adding a Protocol-Specific xDR Session](#)).
2. Configure the IXP to generate and store XDR Records based on the PDUs.
3. Using CCM, select the Datasources described in [Creating a Dictionary](#).
4. Assign one or more xDR Sessions to the Datasources described in [Creating a Dictionary](#). Check that the information matches the actual xDR builder configuration. Otherwise, applications may not output proper information.
5. Repeat steps 1-5 when there have been changes in PDU Dataflows, routing and xDR Session configurations.

## Configuring Q.752 Processing

All Q.752 data flows are configured using the Q.752 data flow assistant. Each data flow is configured for each subsystem.

## Alarm Configuration

Alarms generated by various IMF and PMF modules can be globally enabled or disabled from CCM. The alarms can be categorized. Follow these guidelines when configuring alarms.


1. Enable or disable individual alarms originating from the monitored Eagles (see [About SS7 OAM Alarms](#)).
2. Enable or disable individual alarms originating from the IMF and PMF servers (see [About SS7 OAM Alarms](#)).
3. Follow the procedure described in [Managing SLOR Thresholds](#) to enable or disable individual Q.752-related alarms and set related alarm thresholds.

## Duplicate IP Packet Suppression Configuration

The duplicate IP packet suppression feature works on the suppression interval, the packet is suppressed if the same packet is received within the suppression interval. This interval “DupIpPktTimeoutMs” is configured from the CCM per acquisition system. The duplicate packets are suppressed per traffic classification, the user can enable/disable the Duplicate IP Packet suppression by selecting “Duplicate Suppression”.

The Duplicate IP Packet Suppression can be configured as follows:

1. Modify the DupIpPktTimeoutMs in Settings on Acquisition sub-system level. The value can be configured between 0 to 20 ms, with 1ms interval. 0 means suppression off.

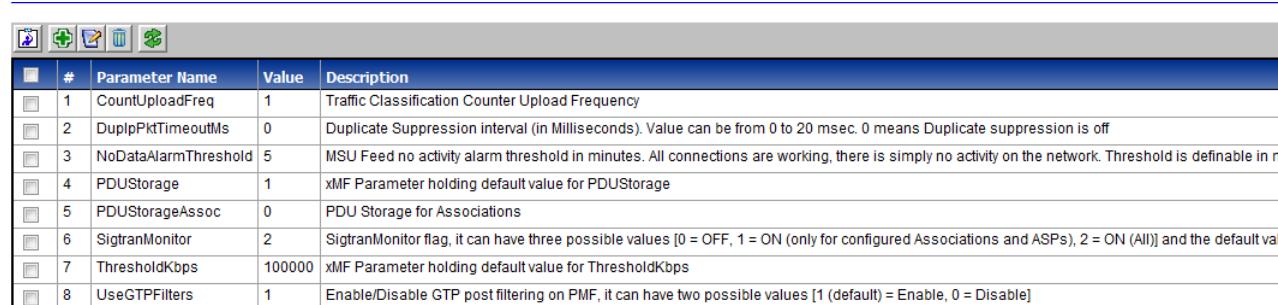

	#	Parameter Name	Value	Description
	1	CountUploadFreq	1	Traffic Classification Counter Upload Frequency
	2	DupIpPktTimeoutMs	0	Duplicate Suppression interval (in Milliseconds). Value can be from 0 to 20 msec. 0 means Duplicate suppression is off
	3	NoDataAlarmThreshold	5	MSU Feed no activity alarm threshold in minutes. All connections are working, there is simply no activity on the network. Threshold is definable in minutes.
	4	PDUStorage	1	xMF Parameter holding default value for PDUStorage
	5	PDUStorageAssoc	0	PDU Storage for Associations
	6	SigtranMonitor	2	SigtranMonitor flag, it can have three possible values [0 = OFF, 1 = ON (only for configured Associations and ASPs), 2 = ON (All)] and the default value is 2
	7	ThresholdKbps	100000	xMF Parameter holding default value for ThresholdKbps
	8	UseGTPFilters	1	Enable/Disable GTP post filtering on PMF, it can have two possible values [1 (default) = Enable, 0 = Disable]

2. Enable the “Duplicate Suppression” while creating the TC. If this is not selected then no duplicate packets will be suppressed for that TC.

**Traffic Classification - Name and Filtering**

Active

Name:

Description:

Monitoring Policy: n/a   Duplicate Suppression:

Internet Protocol: IPv4   Transport Protocol: All   Application Layer: **Association**

Filters   Forwarding


### Activate/Deactivate Duplicate IP Pkt Suppression

The feature can be activated or deactivated for the traffic classification. This can be done from the Traffic Classification listing screen.

Name	Description	Internet Protocol	Transport Protocol	Application Layer	Forwarding	Status	Duplicate Suppression	Policy	Annotations
UCSRABCCMA_16		IPv4	All	All	Packets				
UCSRABCCMA_18		IPv4	All	All	Packets				
TC		IPv4	All	All	Packets				
A_Gb0ip_CI_12		IPv4	All	All	Packets				
A_Gb0ip_CI_20		IPv4	All	All	Packets				
A_Gb0ip_CI_7		IPv4	All	All	Packets				
A_Gb0ip_ci_1		IPv4	All	All	Packets				
A_Gb0ip_ci_10		IPv4	All	All	Packets				
A_Gb0ip_ci_4		IPv4	All	All	Packets				
A_IS41_11		IPv4	All	All	Packets				
A_IS41_13		IPv4	All	All	Packets				
A_IS41_14		IPv4	All	All	Packets				
A_IS41_17		IPv4	All	All	Packets				
A_IS41_5		IPv4	All	All	Packets				
A_IS41_8		IPv4	All	All	Packets				

## Activate


1. Select the TC and click on “Activate” button.
2. Select “Duplicate Suppression” to activate duplicate packet suppression for the TC.

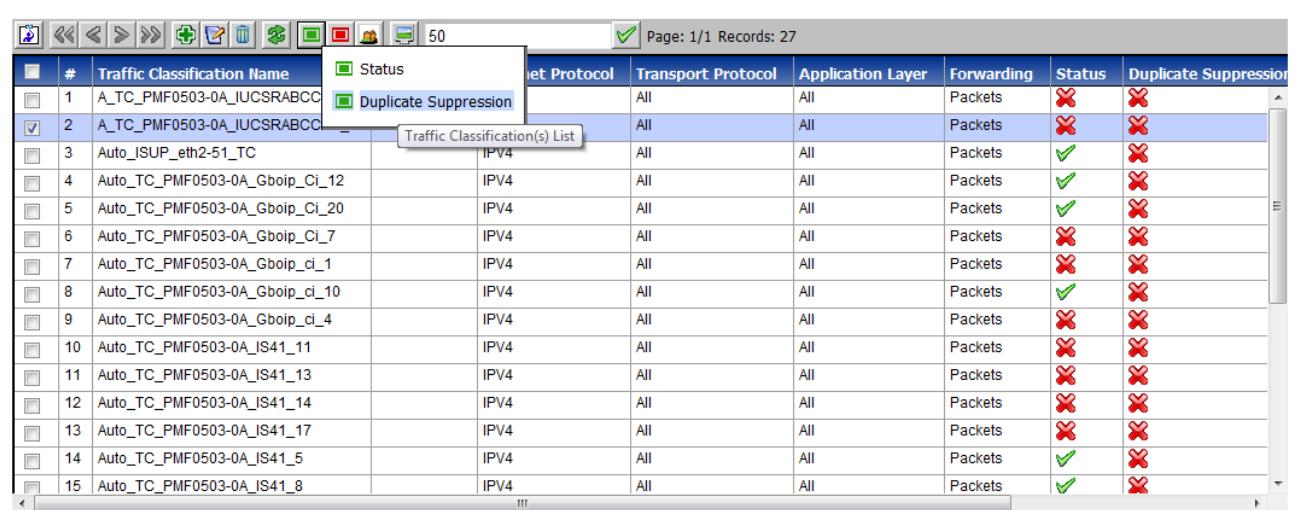

#	Traffic Classification Name	Status	Net Protocol	Transport Protocol	Application Layer	Forwarding	Status	Duplicate Suppression
1	A_TC_PMF0503-0A_IUCSRABCC	<input checked="" type="checkbox"/>	All	All	Packets			
2	A_TC_PMF0503-0A_IUCSRABCC	<input checked="" type="checkbox"/>	All	All	Packets			
3	Auto_ISUP_eth2-51_TC	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
4	Auto_TC_PMF0503-0A_Gb0ip_Cl_12	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
5	Auto_TC_PMF0503-0A_Gb0ip_Cl_20	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
6	Auto_TC_PMF0503-0A_Gb0ip_Cl_7	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
7	Auto_TC_PMF0503-0A_Gb0ip_ci_1	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
8	Auto_TC_PMF0503-0A_Gb0ip_ci_10	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
9	Auto_TC_PMF0503-0A_Gb0ip_ci_4	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
10	Auto_TC_PMF0503-0A_IS41_11	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
11	Auto_TC_PMF0503-0A_IS41_13	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
12	Auto_TC_PMF0503-0A_IS41_14	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
13	Auto_TC_PMF0503-0A_IS41_17	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
14	Auto_TC_PMF0503-0A_IS41_5	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
15	Auto_TC_PMF0503-0A_IS41_8	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		

## Deactivate

1. Select the TC and click on “DeActivate” button.
2. Select “Duplicate Suppression” to deactivate duplicate packet suppression for the TC.

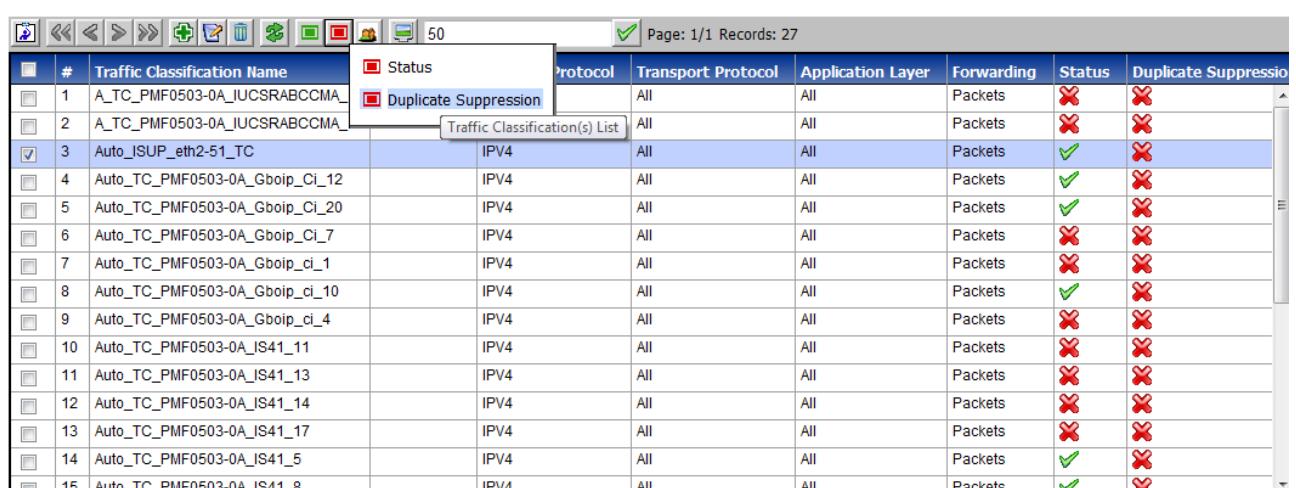

#	Traffic Classification Name	Status	Protocol	Transport Protocol	Application Layer	Forwarding	Status	Duplicate Suppression
1	A_TC_PMF0503-0A_IUCSRABCCM	<input checked="" type="checkbox"/>	All	All	Packets			
2	A_TC_PMF0503-0A_IUCSRABCCM	<input checked="" type="checkbox"/>	All	All	Packets			
3	Auto_ISUP_eth2-51_TC	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
4	Auto_TC_PMF0503-0A_Gb0ip_Cl_12	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
5	Auto_TC_PMF0503-0A_Gb0ip_Cl_20	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
6	Auto_TC_PMF0503-0A_Gb0ip_Cl_7	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
7	Auto_TC_PMF0503-0A_Gb0ip_ci_1	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
8	Auto_TC_PMF0503-0A_Gb0ip_ci_10	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
9	Auto_TC_PMF0503-0A_Gb0ip_ci_4	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
10	Auto_TC_PMF0503-0A_IS41_11	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
11	Auto_TC_PMF0503-0A_IS41_13	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
12	Auto_TC_PMF0503-0A_IS41_14	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
13	Auto_TC_PMF0503-0A_IS41_17	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
14	Auto_TC_PMF0503-0A_IS41_5	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		
15	Auto_TC_PMF0503-0A_IS41_8	<input checked="" type="checkbox"/>	IPv4	All	All	Packets		

## Appendix B: xDR Builder Parameters

---

### List of Parameters for Each xDR Builder

Each Build *xDR Session* of a *Dataflow Processing* has a set of parameters that are set by default but can be customized for your system.

### Initial Parameters

Field	Description
Generic Parameters	
No PDU timeout (s)	Defines the duration (in seconds) beyond which an alarm is generated if no PDU has been detected.
Max transaction duration (s)	<p>Defines (in seconds) the maximal accepted duration of a transaction (or communication). When a transaction duration exceeds this value, an xDR is generated (with "timer expiry" or "long call" status), even if the transaction is not really terminated.</p> <p>This parameter is displayed only if "reconstitution" is part of the xDR builder name. It is used only if the garbage period is different from 0.</p> <p>The value of the parameter Max transaction duration may be overloaded by an xDR builder specific parameter for a given transaction type (see the xDR builder user's manual).</p>
Garbage period (s)	Defines the period (in seconds) of activation of the long transaction cleaning (i.e. the generation of xDRs with "timer expiry" status for all the transactions which duration exceeds the max transaction duration). This parameter is displayed only if "reconstitution" is part of the xDR builder name.
Monitored	This check box indicates if the builder is being monitored or not. This check box cannot be selected in this screen.
Specific Parameters	
Send xDRs and frames to the xDR consumer	Select this if you want to send the xDRs and frames to the xDR consumer. The default is selected.
Period of flow trace displaying	Defines the period where the flow trace is displayed. The default is 0.
Maximum authorized frame length acceptable (in KB)	Enables you to enter the max. length of frame length in KBs. Default is 4KB.
ATM layer activation	Select this field if you want the ATM layer to be activated. Default is selected.
Defaults button	Click this button to reset the screen to default values.

TABLE 102: INITIAL STEP SCREEN

### IP Transport Screen

Field	Description
Generic Parameters	
No PDU timeout (s)	Defines the duration (in seconds) beyond which an alarm is generated if no PDU has been detected.
Max transaction duration (s)	<p>Defines (in seconds) the maximal accepted duration of a transaction (or communication). When a transaction duration exceeds this value, an xDR is generated (with "timer expiry" or "long call" status), even if the transaction is not really terminated.</p> <p>This parameter is displayed only if "reconstitution" is part of the xDR builder name. It is used only if the garbage period is different from 0.</p>

Field	Description
	The value of the parameter Max transaction duration may be overloaded by an xDR builder specific parameter for a given transaction type (see the xDR builder user's manual).
Garbage period (s)	Defines the period (in seconds) of activation of the long transaction cleaning (i.e. the generation of xDRs with "timer expiry" status for all the transactions which duration exceeds the max transaction duration). This parameter is displayed only if "reconstitution" is part of the xDR builder name.
Monitored	This check box indicates if the builder is being monitored or not. This check box cannot be selected in this screen.
Specific Parameters	
Run SCTP path naming function	Select this if you want to run the naming function. Default is selected.
Period of subscribed summary displaying(s)	Numerical field where you can enter an integer to show the period length. Default is 0.
List of servers ports known	Select this parameter if you want to determine the Way and set inactivity garbage. In this format: Protocol Name [Ports] (Max inactivity in seconds)
Run IP reassemble function	Select this if you want to run reassemble function. Default is selected.
Max duration of an IP fragmented inactivity	Numerical field where you can enter an integer to show the duration length. Default is 10.
Set SCTP path naming (8 bytes max)	Enter a path name in the field. For example: Path1=[FF01::10.25.23.15-4569][10.25.6.66-4469]
Max PLDs in SCTP retention	Numerical field where you can enter the number of PLDs in retention. For example: (0->retention function deactivated)
IP fragmented max frame limit	Numerical field where you can enter the number of PLDs in retention. For example: (0->No limit)
Max duration of a TCP connection inactivity(s)	A set of numerical fields to enter the following: Connecting - default 60 Connected - default 60 Closing - default 60 Closed - default 10 Established - default 300 You can also add a new item and its value by clicking the plus icon.
Send xDRs and frames to the xDR consumer	Select this if you want to send the xDRs and frames to the xDR consumer. The default is selected.
Always set the way management function	Select this if you want to set the management function for the builder. The default is not selected.
Period of flow trace displaying	Numerical field where you can enter an integer for the display period.
Max PLDs in SCTP retention	Numerical field where you can enter the number of PLDs in retention. For example: (0->retention function deactivated) Default is 50.
Max duration of an IP fragmented inactivity(s)	Numerical field where you can enter an integer for the maximum period of inactivity. Default is 10.
Defaults button	Click this button to reset the screen to default values.

TABLE 103: INITIAL STEP SCREEN

## SS7 SCCP Parameters

Field	Description
Generic Parameters	
No PDU timeout (s)	Defines the duration (in seconds) beyond which an alarm is generated if no PDU has been detected.
Max transaction duration (s)	Defines (in seconds) the maximal accepted duration of a transaction (or communication). When a transaction duration exceeds this value, an xDR is generated (with "timer expiry" or "long call" status), even if the transaction is not really

Field	Description
	terminated. This parameter is displayed only if "reconstitution" is part of the xDR builder name. It is used only if the garbage period is different from 0. The value of the parameter Max transaction duration may be overloaded by an xDR builder specific parameter for a given transaction type (see the xDR builder user's manual).
Garbage period (s)	Defines the period (in seconds) of activation of the long transaction cleaning (i.e. the generation of xDRs with "timer expiry" status for all the transactions which duration exceeds the max transaction duration). This parameter is displayed only if "reconstitution" is part of the xDR builder name.
Monitored	This check box indicates if the builder is being monitored or not. This check box cannot be selected in this screen.
Specific Parameters	
RANAP Routing: Listed Point Codes to Include or Exclude	Pull-down list to select if point codes are:  Excluded  Included
Filter = Accept source SSN to sink SSN	Enables you to add an source SSN. To add an item, click <b>plus</b> and select the source SSN and sink SSN from the pull-down lists
Period of flow trace displaying (s)	Numerical field to set the period of flow trace displays. Default is 0.
Definition of INAP interfaces = Source SSN to sink SSN for INAP protocol	Similar to the Filter = <i>Accept source SSN to sink SSN</i> field.
Send xDRs and frames to the xDR Consumer	Select this if you want to send the xDRs and frames to the xDR consumer. The default is selected.
SCCP Format	Pull-down list for selecting the SCCP format can be either:  ANSI (default)  ITU
RANAP Routing: List of Point Codes	Enter text in the alphanumeric field and add or remove point codes to list.
BSSAP Routing: Listed Point Codes to Include or Exclude	Can select to include or exclude listed point codes. (Default is excluded.)
BSSAP Routing: Priority on Point Codes or SSN (default)	Pull-down list to select either:  SSN routing is priority rule (default)  PC filtering is priority rule
Processed Segmentation	Select is segmentation is processed. Default is selected.
BSSAP Routing: List of Point Codes	Can add or remove routing point codes.
RANAP Routing: Priority on Point Codes or SSN (default)	Pull-down list to select either:  SSN routing is priority rule (default)  PC filtering is priority rule
Definition of MAP interfaces = Source SSN to sink SSN for MAP protocol	You can add source SSN and sink SSNs. You can remove selected maps by clicking <b>minus</b> .
Trace period	Select if there is to be a trace period. Default is not selected.
Analyze SSN	Select if you want to analyze SSNs. Default is selected.

Field	Description
Default button	Click this to return the screen to its default values.

TABLE 104: SS7 SCCP SCREEN

## SS7 SUA Parameters

Field	Description
Generic Parameters	
No PDU timeout (s)	Defines the duration (in seconds) beyond which an alarm is generated if no PDU has been detected.
Max transaction duration (s)	Defines (in seconds) the maximal accepted duration of a transaction (or communication). When a transaction duration exceeds this value, an xDR is generated (with "timer expiry" or "long call" status), even if the transaction is not really terminated. This parameter is displayed only if "reconstitution" is part of the xDR builder name. It is used only if the garbage period is different from 0. The value of the parameter Max transaction duration may be overloaded by an xDR builder specific parameter for a given transaction type (see the xDR builder user's manual).
Garbage period (s)	Defines the period (in seconds) of activation of the long transaction cleaning (i.e. the generation of xDRs with "timer expiry" status for all the transactions which duration exceeds the max transaction duration). This parameter is displayed only if "reconstitution" is part of the xDR builder name.
Monitored	This check box indicates if the builder is being monitored or not. This check box cannot be selected in this screen.
Specific parameters	
Period of flow trace displaying (s)	Numeric field to enter the time for displaying traces. Default is 0.
Filter = Accept source SSN to sink SSN	Enables you to add or remove source and sink SSNs.
Definition of INAP interfaces = Source SSN to sink SSN for INAP protocol	Enables you to add, modify or remove INAP source and sink SSNs for INAP protocols. Click <b>plus</b> to add a definition . Click <b>minus</b> to remove a definition. Select alternate source and sink SSNs to modify a definition.
Send xDRs and frames to the xDR consumer	Select this if you want to send the xDRs and frames to the xDR consumer. The default is selected.
Trace period	Select if there is to be a trace period. Default is not selected.
Analyze SSN	Select if you want to analyze SSNs. Default is selected.
Definition of MAP interfaces = Source SSN to sink SSN for MAP protocol	Enables you to add, modify or remove MAP source and sink SSNs for MAP protocols. Click <b>plus</b> to add a definition . Click <b>minus</b> to remove a definition. Select alternate source and sink SSNs to modify a definition.
Defaults button	Click this to return screen to default values.

TABLE 105: SS7 SUA SCREEN

## SS7 Transport Parameters

Field	Description
Generic Parameters	
No PDU timeout (s)	Defines (in seconds) the maximal accepted duration of a transaction (or communication). When a transaction duration exceeds this value, an xDR is generated (with "timer expiry" or "long call" status), even if the transaction is not really terminated. This parameter is displayed only if "reconstitution" is part of the xDR builder name. It is used only if the garbage period is different from 0. The value of the parameter Max transaction duration may be overloaded by an xDR

Field	Description
	builder specific parameter for a given transaction type (see the xDR builder user's manual).
Max transaction duration (s)	Defines the period (in seconds) of activation of the long transaction cleaning (i.e. the generation of xDRs with "timer expiry" status for all the transactions which duration exceeds the max transaction duration). This parameter is displayed only if "reconstitution" is part of the xDR builder name.
Garbage period (s)	This check box indicates if the builder is being monitored or not. This check box cannot be selected in this screen.
Monitored	Defines the duration (in seconds) beyond which an alarm is generated if no PDU has been detected.
Specific parameters	
Period of flow trace displaying(s)	Numerical field to set the period of flow trace displays. Default is 0.
Send xDRs and frames to the xDR Consumer	Select this if you want to send the xDRs and frames to the xDR consumer. The default is selected.
SIGTRAN MTP3 Point Code Format (ITU: 14 bits, ANSI: 24 bits)	Pull-down list enables you to select between ITU or ANSI. The default is ITU

TABLE 106: SS7 TRANSPORT SCREEN

## Appendix C: About STC Copy and Fast Copy Effects on Monitoring Groups and Dataflows

---

There is an impact to Monitoring Groups and Dataflows when changing links from STC Copy to Fast Copy and the automatic configuring of the system via the xMF discovery process.

It is important to understand how to configure and manage Monitoring Groups and Dataflows when switching between STC Copy and Fast Copy.

### Considerations When Working with STC/Fastcopy

The following is a list of points one should consider when working with the STC/Fastcopy feature:

- Existing STC links that are monitored remain in the same Monitoring Group.
- Monitored links which were part of an Association and are changed back to STC copy will remain in the same Monitoring Group if the linkset belongs to the same Monitoring Group.
- Monitored links that are part of an Association and are changed back to STC copy will switch to the same Monitoring Group as part of the linkset if the linkset belongs to a different Monitoring Group.
- Any un-monitored links which are part of an Association and are changed back to STC Copy will be added to the same Monitoring Group as the linkset.
- The Monitoring Group panel in CCM does not show Association as a possible selection to monitor if the Association no longer contains Fast Copy links. However, the linkset(s) will be available as a possible selection.
- Un-monitored links that switch from STC to an Association will be added to the same Monitoring Group as the Association if the Association is monitored.
- The Monitoring Group panel in CCM does not show a linkset as a possible selection if all the links in the linkset belong to Association(s). However, the Association(s) will be available as a possible selection.
- If a Monitoring Group no longer contains any links, then the Monitoring Group is automatically deleted.
- If a Dataflow no longer contains any links, then the Dataflow is automatically deleted.
- If the movement of linksets or Associations from one Monitoring Group to another results in removal of all routes in one or more Dataflows, then those Dataflows are deleted automatically. You will then need to create new or modify existing Dataflows in order to re-route the linksets or Associations.
- Dataflows may need to be modified or added in order to accommodate automatic Monitoring Group changes. The routes within the existing Dataflows may be removed automatically, but may need to be added manually by selecting the necessary linksets or Associations.
- The Dataflow Processings and streams will not be modified or removed automatically due to any automatic changes to Dataflows during the STC-FC switching, although you may need to manually modify or remove the Dataflow Processings later.
- Because Associations are included in the calculation of Monitoring Group capacity, it is possible for some of the links that changed from STC to FC to be monitored after the discovery process. For example, the Monitoring Group capacity for a linkset containing 3 M2PA Associations and 12 STC links would equate to 18. Therefore, it is highly recommended that after synchronizing the IMF that the Monitoring Groups, Dataflows and number of Streams should be verified of changes prior to applying changes to the IMF Subsystem. The verification also applies to the load balance on IMF based on Monitoring Groups, Dataflows, and Streams.
- Make sure that you **Apply Changes** in CCM when converting STC to Fast Copy or Fast Copy to STC because of the possibility of traffic loss during the Synchronization period up until you have applied all changes to the Subsystem (modifying or removing Dataflows and Monitoring Groups).

## About STC Copy to Fast Copy Interactions

Monitoring Groups and Dataflows are affected when switching one or more links from STC Copy to Fast Copy and vice versa.

It is important to understand how to configure and manage Monitoring Groups and Dataflows when switching between STC Copy to Fast Copy.

### Automatic Monitoring of Un-Monitored Links

In this scenario there are previously discovered network elements configured on the Eagle using STC Copy including two linksets belonging to the same Monitoring Group and a linkset that does not belong to a Monitoring Group. The configuration on the Eagle is changed so that now both linksets contain the same M3UA Association containing several links.

#### Monitoring Groups Impacted in this Scenario

When the operator re-discovers the network elements from the IMF the following changes occur:

- Existing STC links that are monitored will remain in the same Monitoring Group.
- Monitored Links which are now part of an association will remain in same monitoring group.
- Un-Monitored links which are now part of an Association will be added to the same monitoring group as the Association, and the Association is monitored automatically..
- The Monitoring Group panel in CCM longer shows a linkset as a possible selection if all the links in the linkset belong to Associations. However, the associations are available as a possible selection.

**Note:** Because associations are included in the calculation for Monitoring Group capacity it is possible that some of the links that changed from STC Copy to Fast Copy to be un-Monitored.

The tables show the associations A1, A2, A3 and A4 are added to the configuration, the link L-13 remains in the same Monitoring Group (MG1) and the un-monitored links (L-21) are added to the same Monitoring Group (MG1). Link L-31 remains in the same Monitoring Group (MG1).

Linkset	Link	Monitoring Group	Association
LS1			
	L-11	MG1	
	L-12	MG1	
	L-13	MG1	
LS2			
	L-21		
	L-22		
	L-23		
LS3			
	L-31	MG1	
	L-32		

TABLE 107: BEFORE

Linkset	Link	Monitoring Group	Association
LS1			
	L-11	MG1	

Linkset	Link	Monitoring Group	Association
	L-12	MG1	
	L-13	MG1	<b>A1</b>
LS2			
	L-21	MG1	<b>A1</b>
	L-22		
	L-23		
LS3			
	L-31	MG1	<b>A2, A3, A4</b>
	L-32		

TABLE 108: AFTER (IMPACTS BOLDED)

#### Dataflows Impacted in this Scenario

There is no impact to the SS7 Dataflows for this scenario.

### Inter-monitoring Groups Link Transfer (M3UA)

In this scenario there were previously discovered Network Elements configured on the Eagle using STC including linksets that belong to different Monitoring Groups. The configuration on the Eagle was changed so that now the linkset contains an M3UA Association containing several links. Although this is a separate "Delete" and "Add" operation on the Eagle, it is possible that the operator failed to Synchronize after each operation.

#### Monitoring Groups Impacted in this Scenario

When the operator re-discovers the Network Elements from the IMF the following changes occur:

- Existing STC links that are monitored will remain in the same Monitoring Group.
- Monitored links which are part of an association remain in same Monitoring Group as the Association.
- Un-monitored links which are part of an Association will be added to the same Monitoring Group.
- The Monitoring Group panel in CCM will no longer show a linkset as a possible selection if all the links in the linkset belong to Associations. However, the Associations will be available as a possible selection.

The tables show the Associations A1, A3, A4 and A5 are added to the configuration and the additions of link L-21 is added to the same Monitoring Group MG1. Link L-31 remains in the same Monitoring Group MG2.

Linkset	Link	Monitoring Group	Association
LS1			
	L-11	MG1	
	L-12	MG1	
	L-13	MG1	
LS2			
	L-21	MG2	

Linkset	Link	Monitoring Group	Association
	L-22	MG2	
	L-23	MG2	
LS3			
	L-31	MG2	A2
	L-32		

TABLE 109: BEFORE

Linkset	Link	Monitoring Group	Association
LS1			
	L-11	MG1	
	L-12	MG1	
	L-13	MG1	A1
LS2			
	L-21	<b>MG1</b>	<b>A1</b>
	L-22	MG2	
	L-23	MG2	
LS3			
	L31	MG2	A2, A3, A4, A5
	L-32		

TABLE 110: AFTER (IMPACTS BOLDED)

#### Dataflows Impacted in this Scenario

There would not be any impact to the SS7 Dataflows for this example, but if LS2 initially contained only L-21 and if a dataflow was created only with LS2, then after the migration and the synchronization this Dataflow would be deleted as the route involving MG1 would be removed and the Dataflow would become empty.

#### Monitoring as Before (M3UA)

In this scenario there were previously discovered Network Elements configured on the Eagle using STC, including Linksets that belong to different Monitoring Groups. The configuration on the Eagle was changed so that now the Linksets contains M2PA Associations for several links.

#### Monitoring Groups Impacted in this Scenario

When the operator re-discovers the network elements from the IMF the following changes occur:

- Existing STC links that are monitored will remain in the same Monitoring Group.
- Monitored Links which are part of an Association will remain in same Monitoring Group.
- Un-Monitored Links which are part of an Association will remain un-monitored.
- The Monitoring Group panel in CCM will no longer show a Linkset as a possible selection if all the links in the Linkset belong to Associations. However, The Associations will be available as a possible selection.

The tables show the Associations A1 - A10 is added to the configuration and the links remain in the same Monitoring Group (MG1).

Linkset	Link	Monitoring Group	Association
LS1			
	L-11	MG1	
	L-12	MG1	
LS2	L-13	MG1	
	L-21	MG2	
LS3	L-22	MG2	
	L-23	MG2	
LS3	L-31	MG2	
	L-32	MG2	

TABLE 111: BEFORE

Linkset	Link	Monitoring Group	Association
LS1			
	L-11	MG1	<b>A1</b>
	L-12	MG1	<b>A2</b>
LS2	L-13	MG1	<b>A3</b>
	L-21	MG2	<b>A4</b>
LS3	L-22	MG2	<b>A5</b>
	L-23	MG2	<b>A6</b>
LS3	L31	MG2	<b>A7, A8, A9, A10</b>
	L32		

TABLE 112: AFTER (IMPACTS BOLDED)

Dataflows Impacted in this Scenario

There would not be any impact to the SS7 Dataflows for this user case.

### Inter-monitoring Groups Link Transfer (M2PA)

In this scenario there were previously discovered Network Elements configured on the Eagle using Fast Copy including M2PA Associations that belong to a Monitoring Group. The configuration on the Eagle was changed so that now one of the links is switched to M3UA. Although this is a separate "Delete" and "Add" operation on the Eagle, it is possible that the operator failed to Synchronize after each operation.

#### Monitoring Groups Impacted in this Scenario

When the operator re-discovers the Network Elements from the IMF the following changes occur:

- Existing STC links that are monitored will remain in the same Monitoring Group.
- Monitored links which are part of an Association remain in same Monitoring Group when the linkset belongs to the same Monitoring Group.
- Monitored STC links will switch to the same Monitoring Group as the Association.
- Un-monitored links that are part of an association are added to the same Monitoring Group as the new Association.

The tables show the Link L-13 is moved to Association A3 and will be added to the same Monitoring Group (MG1).

Linkset	Link	Monitoring Group	Association
LS1			
	L-11	MG1	A1
	L-12	MG1	A2
	L-13	MG1	
LS2			
	L-21	MG2	A3
	L-22	MG2	A5
	L-23	MG2	A6
LS3			
	L-31	MG2	A3
	L-32		

TABLE 113: BEFORE

Linkset	Link	Monitoring Group	Association
LS1			
	L-11	MG1	
	L-12	MG1	
	L-13	<b>MG2</b>	<b>A3</b>
LS2			
	L-21	MG2	A3
	L-22	MG2	A5
	L-23	MG2	A6
LS3			
	L-31	MG2	A3
	L-32		

TABLE 114: AFTER (IMPACTS BOLDED)

### Dataflows Impacted in this Scenario

There would potentially be changes to the Dataflow for this scenario assuming the Linkset LS1 is part of an SS7 Dataflow. If the SS7 Dataflow does not contain any STC links after the re-discovery process, then the dataflow would not be removed.

## About Fast Copy to STC Copy Interactions

When moving from Fast Copy back to STC Copy where the current IMF configuration has been previously discovered using Fast Copy, there are two scenarios that can occur when moving from Fast Copy to STC Copy.

**Note:** Associations will NOT be removed automatically; you will have to remove them manually in the Network Elements Perspective.

- Automatic Monitoring of Un-monitored Links (Linkset)
- Inter-monitoring Groups Link Transfer (Linkset)

### Automatic Monitoring of Un-Monitored Links (Linkset)

In this scenario there are previously discovered network elements configured on the Eagle using Fast Copy including a linkset belonging to a Monitoring Group and a linkset that does not belong to a Monitoring Group. The configuration on the Eagle has changed the so that now both linksets are switched back to STC copy and no longer contain the M3UA Association.

#### Monitoring Groups Impacted in this Scenario

When the operator re-discovers the Network Elements from the IMF the following changes occur:

- Existing STC links that are monitored remain in the same Monitoring Group.
- Monitored Links which are now part of an Association will remain in same Monitoring Group.
- Any un-monitored links that are part of a linkset are added to the same Monitoring Group as the Association.
- The Monitoring Group panel in CCM no longer shows Association A1 as a possible Association to monitor.

The tables show that Associations A1, A2, A3 and A4 are remove from the configuration, the Link L13, L-21 and L-31 remain in the same Monitoring Group (MG1) and the Un-Monitored Links (L-22, L23 and L-32) are added to the same Monitoring Group (MG1).

Linkset	Link	Monitoring Group	Association
LS1			
	L-11	MG1	
	L-12	MG1	
	L-13	MG1	A1
LS2			
	L-21	MG1	
	L-22		A1
	L-23		
LS3			

Linkset	Link	Monitoring Group	Association
	L-31	MG1	<b>A2, A3, A4</b>
	L-32		

TABLE 115: BEFORE

Linkset	Link	Monitoring Group	Association
LS1			
	L-11	MG1	
	L-12	MG1	
	L-13	MG1	
LS2			
	L-21	MG1	
	L-22	<b>MG1</b>	
	L-23	<b>MG1</b>	
LS3			
	L-31	MG1	
	L-32	<b>MG1</b>	

TABLE 116: AFTER (IMPACTS BOLDED)

### Dataflows Impacted in this Scenario

Potentially, there can be changes to the Dataflow for this scenario assuming that Association A1 is part of an IP Dataflow. If the IP Dataflow does not contain any Fast Copy links after the re-discovery process, then the Dataflow would be removed. That is, an IP Dataflow automatically is removed if, after discovery, all the Fast Copy Links belonging to the Dataflow are switched to STC Copy Links. An SS7 Dataflow may need to be modified or added to add STC links

### Inter-monitoring Groups Link Transfer (Linkset)

In this scenario there are previously discovered Network Elements configured on the Eagle using Fast Copy including an Association belonging to a Monitoring Group and a linkset that belongs to a different Monitoring Group. The configuration on the Eagle has changed so that now both linksets are switched back to STC copy and no longer contain the M3UA Association.

#### Monitoring Groups Impacted in this Scenario

When the operator re-discovers the Network Elements from the IMF the following changes occur:

- Existing STC links that are monitored will remain in the same Monitoring Group.
- Monitored links which were part of an Association remain in same Monitoring Group when the linkset belongs to the same Monitoring Group.
- Monitored links which were part of an Association will switch to the same Monitoring Group as the linkset when the linkset belongs to a different Monitoring Group.
- Any un-monitored links which were part of an Association will be added to the same Monitoring Group as the linkset.
- The Monitoring Group panel in CCM will no longer show Association A1 as a possible Association to monitor.

The tables show the Associations A1 and A2 are removed from the configuration, the link L13 will remain in the same Monitoring Group (MG1) and the link L21 will switch to the Monitoring Group (MG2) that has linkset LS2. Link L-32 will be added to Monitoring Group (MG1) that has Linkset LS3.

Linkset	Link	Monitoring Group	Association
LS1			
	L-11	MG1	
	L-12	MG1	
LS2	L-13	MG1	<b>A1</b>
	L-21	MG2	<b>A1</b>
LS3	L-22	MG2	
	L-23	MG2	
	L-31	MG1	<b>A2</b>
	L-32		

TABLE 117: BEFORE

Linkset	Link	Monitoring Group	Association
LS1			
	L-11	MG1	
	L-12	MG1	
LS2	L-13	MG1	
	L-21	<b>MG2</b>	
LS3	L-22	MG2	
	L-23	MG2	
	L-31	MG1	
	L-32	<b>MG2</b>	

TABLE 118: AFTER (IMPACTS BOLDED)

#### Dataflows Impacted in this Scenario

Potentially, there can be changes to the Dataflow for this scenario assuming that Association A1 is part of an IP Dataflow. If the IP Dataflow does not contain any Fast Copy links after the re-discovery process, then the Dataflow would be removed. That is, an IP Dataflow is automatically removed after discovery of all the Fast Copy Links belonging to the Dataflow are switched to STC Copy Links.

## About Moving Fast Copy from M3UA to M2PA

When moving from Fast Copy from M3UA to M2PA and vice-versa there are two scenarios that can occur when changing Fast Copy Links. They are:

- Inter-monitoring Groups Link Transfer (M2PA to M3UA)
- Inter-monitoring Groups Link Transfer (M3UA)

### Inter-monitoring Groups Link Transfer (M2PA to M3UA)

In this scenario there are previously discovered network elements configured on the Eagle using Fast Copy, including M2PA Associations belong to a Monitoring Group. The configuration on the Eagle has changed so that one of the Associations is switched to M3UA. Although this is a separate "delete" and "add" operation on the Eagle, it may be possible that the operation failed to Synchronize after each operation.

#### Monitoring Groups Impacted in this Scenario

When the operator re-discovers the Network Elements from the IMF the following changes occur:

- Existing STC links that are monitored will remain in the same Monitoring Group.
- Monitored links which were part of an Association remain in same Monitoring Group.
- Monitored links that are part of changed Association now belong to Monitoring Group of the Association.

The tables show the Association A4 is removed from the configuration; Link L-21 is moved to Association A3 and is added to the same Monitoring Group (MG1).

Linkset	Link	Monitoring Group	Association
LS1			
	L-11	MG1	A1
	L-12	MG1	A2
	L-13	MG1	A3
LS2			
	L-21	MG2	A4
	L-22	MG2	A5
	L-23	MG2	A6
LS3			
	L-31	MG2	A4
	L-32		

TABLE 119: BEFORE

Linkset	Link	Monitoring Group	Association
LS1			
	L-11	MG1	A1
	L-12	MG1	A2
	L-13	MG1	A3
LS2			
	L-21	MG1	A3
	L-22	MG2	A4

Linkset	Link	Monitoring Group	Association
	L-23	MG2	A5
LS3			
	L-31	MG2	A4
	L-32		

TABLE 120: AFTER (IMPACTS BOLDED)

### Dataflows Impacted in this Scenario

Potentially, there are changes to the Dataflow for this scenario assuming that Association A4 is part of an IP Dataflow. If the IP Dataflow does not contain any Fast Copy links after the re-discovery process, then the Dataflow is removed. That is, an IP Dataflow is automatically removed if, after discovery, all the Fast Copy Links belonging to the Dataflow are switched to STC Copy Links.

### Inter-monitoring Groups Link Transfer (M2PA)

In this scenario there were previously discovered Network Elements configured on the Eagle using Fast Copy including M2PA Associations that belong to a Monitoring Group. The configuration on the Eagle was changed so that now one of the links is switched to M3UA. Although this is a separate "Delete" and "Add" operation on the Eagle, it is possible that the operator failed to Synchronize after each operation.

### Monitoring Groups Impacted in this Scenario

When the operator re-discovers the Network Elements from the IMF the following changes occur:

- Existing STC links that are monitored will remain in the same Monitoring Group.
- Monitored links which are part of an Association remain in same Monitoring Group when the linkset belongs to the same Monitoring Group.
- Monitored STC links will switch to the same Monitoring Group as the association.
- Un-monitored links that are part of an Association are added to the same Monitoring Group as the new Association.

The tables show the Link L-13 is moved to association A3 and will be added to the same Monitoring Group (MG1).

Linkset	Link	Monitoring Group	Association
LS1			
	L-11	MG1	A1
	L-12	MG1	A2
	L-13	MG1	
LS2			
	L-21	MG2	A3
	L-22	MG2	A5
	L-23	MG2	A6
LS3			
	L-31	MG2	A3
	L-32		

TABLE 121: BEFORE

Linkset	Link	Monitoring Group	Association
LS1			
	L-11	MG1	
	L-12	MG1	
	L-13	<b>MG2</b>	<b>A3</b>
LS2			
	L-21	MG2	A3
	L-22	MG2	A5
	L-23	MG2	A6
LS3			
	L-31	MG2	A3
	L-32		

TABLE 122: AFTER (IMPACTS BOLDED)

#### Dataflows Impacted in this Scenario

There would potentially be changes to the Dataflow for this scenario assuming the Linkset LS1 is part of an SS7 Dataflow. If the SS7 Dataflow does not contain any STC links after the re-discovery process, then the Dataflow would not be removed.

## Appendix D: Defining and Modifying Flavor (PC Format) of Session at CCM

---

### Define Flavor (PC Format) of Session

Flavor associated with session can be defined in CCM by one of following scenarios:


- Defining flavor while creating session through xDR Data Flow Assistant
- Defining flavor while adding session
- Defining flavor while defining store DFP

#### Defining flavor while creating session through xDR DataFlow Assistant

- Login to CCM application
- Go to Mediation->Sites->Site->IXP->Server->DataFlowProcessings
- Define DFP by selecting “xDR DataFlow Assistant” in right click menu.
- Wizard will also ask for flavor if underlying protocol has point code fields.



Step 4: Configure Session(s)

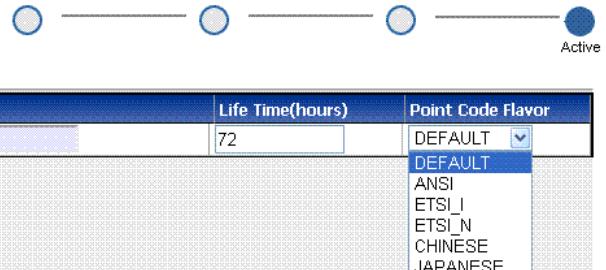

#	xDR Builder Name	Session Name	Life Time(hours)	Point Code Flavor
1	SS7 BICC ETSI CDR reconstitution	sdgeg	72	<div style="border: 1px solid #ccc; padding: 2px; display: inline-block;">         DEFAULT         <span style="margin-left: 10px;">ANSI</span> <span style="margin-left: 10px;">ETSI_I</span> <span style="margin-left: 10px;">ETSI_N</span> <span style="margin-left: 10px;">CHINESE</span> <span style="margin-left: 10px;">JAPANESE</span> </div>

Figure 281: Associate flavor while creating session through xDR Data Flow Assistant

#### Defining flavor while adding Session through session list

- Login to CCM application
- Click on xDR Sessions. This will display of list of sessions
- Click on Add Button on toolbar.
- The wizard will ask for Point Code Flavor only when the dictionary has point code type field. In this case, select the flavor for the session from drop down.

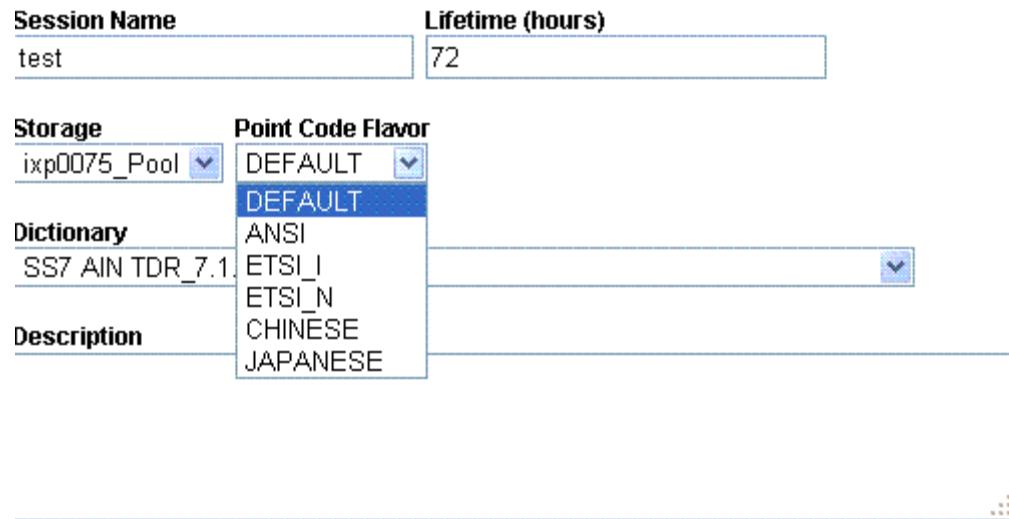


Figure 282: Associating flavor with Session

#### Defining flavor while defining store DFP

- Login to CCM application
- Go to Mediation->Sites->Site->IXP->Server->Data Flow Processings
- Select “Add” in right click menu and define store DFP
- Define flavor in wizard where it asks for create session

**Note:** The flavor dropdown will come only if underlying protocol has point code fields.

#### Modifying flavor of a xDR Session

To modify PC Format of a session, follow the following steps

- Login to CCM application
- Click on xDR Sessions. This will display of list of sessions.
- Click on Modify Button on toolbar.
- Change the flavor for the session by selecting new flavor in drop down and Click OK.

**Note:** The flavor dropdown will come only if underlying protocol has point code fields.

## Appendix E: xDR Filters during Protocol Upgrade

---

During Protocol Upgrade, if all the sessions based on a dictionary are not upgraded then the dictionary is considered as not completely upgraded. In this intermediate state when dictionary is not completely upgraded, there are some limitations on addition and modification of xDR filters as described below.

### **Adding xDR Filters**

While adding an xDR filter if user selects a dictionary, which has been replaced (upgraded) by dictionary of different version then the creation of xDR filter is not allowed. An error is displayed to user mentioning that "The dictionary:<Dictionary\_Name> has been upgraded. Filter creation using old dictionary is not allowed"

**Note:** Same behavior will be demonstrated if xDR filter is added while creating Dataflow Processing.

### **Modifying xDR Filters**

While modifying an xDR filter if user selects a dictionary which is not completely upgraded then an error message is displayed to user mentioning "All Sessions are not upgraded for this dictionary. Please upgrade all sessions and then try again."

## Appendix F: FSE enrichment file syntax

---

The first step in configuring an xDR Static Enrichment file is the naming process. Static enrichment files must begin with a dollar sign character (\$) and have an extension of fse. The name of the enrichment file determines the processing order in the case of multiple files, as the data server processes the files in alphabetical order.

For example, a file with the name `$0addfile.fse` will process before a file with the name `$testfile.fse`.

A static enrichment file must contain three sections:

- Main
- Filter
- Mapping

All of your MAIN sections should look like the following:

```
SECTION:MAIN
VERSION:200
DLL:FSEMAP
MODE:BEFORE
```

It should be noted that each of your filter sections will be a little different, depending on the type and field that the enrichment is changing. The following sample should appear similar to your Filter section:

```
SECTION:FILTER
NAME:Not_International
EXPR:A
COND:A:BNumberNature:<>:International number
```

The mapping section will be different for each enrichment being done. Each file should reflect a different "INPUT" and "OUTPUT" field. The following is an example of a MAPPING section with sample data:

```
SECTION:MAPPING
INPUT:BNumber
OUTPUT:OCNB

MAP:201007:7229
MAP:201032:0138
MAP:201040:9206
MAP:201200:9206
MAP:201202:6630
```

The above statement specifies that for this particular enrichment, we will take the value from the column "BNumber", and if it matches a predefined value, populate a column called "OCNB" with the specified "new" value. In the example above, if the column "BNumber" is populated with a value of "201007", place a value of "7229" in the column called "OCNB".

## Appendix G: PMIA filter syntax

Keyword	Example	Protocol	Description
and	host 1.1.1.1 and host 2.2.2.2	NONE	AND logical operator which combines filter expression
called	called ssn 8	NONE	keyword used to precise which field of a route is concerned by the filter. This keyword may be used with 'host', 'net', 'port', 'ssn', 'gtdigit'
calling	calling ssn 8	NONE	keyword used to precise which field of a route is concerned by the filter. This keyword may be used with 'host', 'net', 'port', 'ssn', 'gtdigit'
dst	dst host 1.1.1.1	NONE	keyword used to precise which field of a route is concerned by the filter. This keyword may be used with 'host', 'net', 'port', 'ssn', 'gtdigit'
not	not (host 1.1.1.1)	NONE	NOT logical operator
or	host 1.1.1.1 or host 2.2.2.2	NONE	OR logical operator which combines filter expression
src	src host 1.1.1.1	NONE	keyword used to precise which field of a route is concerned by the filter. This keyword may be used with 'host', 'net', 'port', 'ssn', 'gtdigit'
vlan	vlan not vlan vlan 430 not vlan 430	VLAN	defines filter on a given VLAN identifier (if several VLAN identifier, then filter is applied on the last identifier)
mpls	mpls not mpls mpls 4-8 or mpls 29 not mpls 4-8	MPLS	defines filter on a given MPLS identifier (if several MPLS identifier, then filter is applied on the last identifier)
gre	gre host 1.1.1.1 and gre	IPv4	defines filter on IPv4 'Protocol' (GRE value is 47)
icmp	icmp host 1.1.1.1 and icmp	IPv4	defines filter on IPv4 'Protocol' field (ICMP value is 1)
ip	ip ip and port 53	IPv4	defines filter on ip version 4
ipv4	ipv4 ipv4 and port 53	IPv4	defines filter on ip version 4
ospf	ospf host 1.1.1.1 and ospf	IPv4	defines filter on IPv4 'Protocol' field (OSPF value is 89)
port	port 2906 src port 2906 dst port 2906	IPv4	defines filter on UDP/TCP/SCTP port value
portrange	portrange 53-2399 src portrange 53-2399 dst portrange 53-2399	IPv4	defines filter on UDP/TCP/SCTP port range. The keyword '-' is used to separate lower and higher range values
sctp	sctp host 1.1.1.1 and sctp sctp and port 1010	IPv4	defines filter on IPv4 'Protocol' field (SCTP value is 132)
tcp	tcp host 1.1.1.1 and tcp tcp and port 1010	IPv4	defines filter on IPv4 'Protocol' field (TCP value is 6)
udp	udp host 1.1.1.1 and udp udp and port 1010	IPv4	defines filter on IPv4 'Protocol' (TCP value is 17)
host	host 1.1.1.1 src host 1.1.1.1 dst host 1.1.1.1 host fd0d:deba:d97c:f12::8a:8f1b src host fd0d:deba:d97c:f12::8a:8f1b dst host fd0d:deba:d97c:f12::8a:8f1b	IPv4/IPv6	defines filter on IPv4 address value

net	net 1.1.1.1/28 src net 1.1.1.1/28 dst net 1.1.1.1/28 net fd0d:deba:d97c:f12::8a:8f1b/128 src net fd0d:deba:d97c:f12::8a:8f1b/128 dst net fd0d:deba:d97c:f12::8a:8f1b/128	IPv4/IPv6	defines filter on IPv4 network address range
ipv6	ipv6	IPv6	defines filter on ip version 6
dcppi	dcppi 5 or dcppi 3	SCTP	defines filter on SCTP 'Protocol Payload Identifier' field
m2pa	m2pa(not(dcsi 3 or dcsi 5)) m2pa(not msgclass 1) m2pa(pc 3495) m2pa(opc 3495 and dpc 5806) m2pa(ssn 6 or ssn 7) m2pa(calling ssn 6 or calling ssn 7) m2pa(calling gtdigit (1,4,'336') or calling gtdigit (7,4,'336'))	SCTP	<ul style="list-style-type: none"> <li>- defines the type of SCTP 'Protocol Payload Identifier' as M2PA (value is 5)</li> <li>- imply ETSI protocol stack: <ul style="list-style-type: none"> <li>* point code format is 14 bits length</li> <li>* SCCP ETSI protocol</li> </ul> </li> </ul>
m2paa	m2paa(not(dcsi 3 or dcsi 5)) m2paa(not msgclass 1) m2paa(pc 3495) m2paa(opc 3495 and dpc 5806) m2paa(ssn 6 or ssn 7) m2paa(calling ssn 6 or calling ssn 7) m2paa(calling gtdigit (1,4,'336') or calling gtdigit (7,4,'336'))	SCTP	<ul style="list-style-type: none"> <li>- defines the type of SCTP 'Protocol Payload Identifier' as M2PA (value is 5)</li> <li>- imply ANSI protocol stack: <ul style="list-style-type: none"> <li>* point code format is 24 bits length</li> <li>* SCCP ANSI protocol</li> </ul> </li> </ul>
m2pae	m2pae(not(dcsi 3 or dcsi 5)) m2pae(not msgclass 1) m2pae(pc 3495) m2pae(opc 3495 and dpc 5806) m2pae(ssn 6 or ssn 7) m2pae(calling ssn 6 or calling ssn 7) m2pae(calling gtdigit (1,4,'336') or calling gtdigit (7,4,'336'))	SCTP	<ul style="list-style-type: none"> <li>- defines the type of SCTP 'Protocol Payload Identifier' as M2PA (value is 5)</li> <li>- imply ETSI protocol stack: <ul style="list-style-type: none"> <li>* point code format is 14 bits length</li> <li>* SCCP ETSI protocol</li> </ul> </li> </ul>
m3ua	m3ua(not(dcsi 3 or dcsi 5)) m3ua(not msgclass 1) m3ua(pc 3495) m3ua(opc 3495 and dpc 5806) m3ua(ssn 6 or ssn 7) m3ua(calling ssn 6 or calling ssn 7) m3ua(calling gtdigit (1,4,'336') or calling gtdigit (7,4,'336'))	SCTP	<ul style="list-style-type: none"> <li>- defines the type of SCTP 'Protocol Payload Identifier' as M3UA (value is 3)</li> <li>- imply ETSI protocol stack: <ul style="list-style-type: none"> <li>* SCCP ETSI protocol</li> </ul> </li> </ul>
m3uaa	m3uaa(not(dcsi 3 or dcsi 5)) m3uaa(not msgclass 1) m3uaa(pc 3495) m3uaa(opc 3495 and dpc 5806) m3uaa(ssn 6 or ssn 7) m3uaa(calling ssn 6 or calling ssn 7) m3uaa(calling gtdigit (1,4,'336') or calling gtdigit (7,4,'336'))	SCTP	<ul style="list-style-type: none"> <li>- defines the type of SCTP 'Protocol Payload Identifier' as M3UA (value is 3)</li> <li>- imply ANSI protocol stack: <ul style="list-style-type: none"> <li>* SCCP ANSI protocol</li> </ul> </li> </ul>
gtdigit	m3ua(calling gtdigit '336' or called gtdigit '336')	SCCP	defines filter on SCCP 'Global Title' fields (if 'calling' or 'called' keyword is not precised, then filter matches if Calling or Called GT fields matches the rule)
sccptype	m2pa(sccptype 2 or sccptype 3 or sccptype 4)	SCCP	defines filter on SCCP 'Message Type' field
ssn	m3ua(ssn 6 or ssn 7) m3ua(calling ssn 6 or calling ssn 7)	SCCP	defines filter on SCCP 'SubSystem Number' fields (if 'calling' or 'called' keyword is not precised, then filter matches if Calling or Called SSN fields matches the rule)
msgclass	m3ua(not msgclass 1)	M3UA/M2PA	defines filter on M3UA/M2PA 'Message Class' field
msgtype	m2pa(not(msgtype 1) or dcnisi(-1,0) or dcnisi(-1,1) or dcnisi(-1,2))	M3UA/M2PA	defines filter on M3UA/M2PA 'Message Type' field

dcsi	m3ua(not(dcsi 3 or dcsi 5)) m3ua(not msgclass 1) m3ua(pc 3495) m3ua(opc 3495 and dpc 5806) m3ua(ssn 6 or ssn 7) m3ua(calling ssn 6 or calling ssn 7) m3ua(calling gtdigit (1,4,'336') or calling gtdigit (7,4,336'))	M3UA/MTP3	defines filter on M3UA/MTP3 'Service Indicator' field
dpc	m3ua(opc 3495 and dpc 5806))	M3UA/MTP3	defines filter on M3UA/MTP3 'Destination Point Code' field
opc	m3ua(opc 3495 and dpc 5806))	M3UA/MTP3	defines filter on M3UA/MTP3 'Origin Point Code' field
pc	m3ua(pc 3495)	M3UA/MTP3	defines filter on M3UA/MTP3 'Point Code' fields (Origin or Destination)

## Appendix H: CSV streaming feed

---

The CSV streaming feed feature is used to export xDRs to CSV files, possibly compressed; the files are stored in a local directory (on the server which is owning the CSV streaming feed) or in a remote directory shared through NFS and locally mounted.

The home directory for storing the CSV files is: **/var/TKLC/ixp/StoreExport**. In addition, the user can provide a directory name when setting up a CSV streaming feed; finally, the CSV files will be created in a subdirectory having the name of CSV streaming feed.

Examples:

- The feed's name is **CSVFeed1**, no directory parameter is given; thus, the CSV files will be created in: **/var/TKLC/ixp/StoreExport/CSVFeed1**.
- The feed's name is **CSVFeed2**, the directory parameter is **remote1** (a remotely shared directory is mounted under **/var/TKLC/ixp/StoreExport/remote1**); thus, the CSV files will be created in: **/var/TKLC/ixp/StoreExport/remote1/CSVFeed2**.

**Note:** when a remotely shared directory is to be used to store the CSV files, it has to be mounted in a subdirectory of **/var/TKLC/ixp/StoreExport** and it must grant RWX accesses for the user **cfguser** (UID=2000), group **cfg** (GID=2000). If this user does not exist on the remote server and cannot be created, RWX accesses must be granted to everyone.

The CSV files will be created on-the-fly, in the target directory; the completion of a CSV file can be checked with the presence of the relevant statistics file (for each CSV file, a statistics file is created, when the CSV file is completed). The statistics file has the same name as the CSV file, but the **.CSV** extension is replaced with **.stat**. When the CSV streaming feed is stopped, the current CSV file will not be indicated as completed (the statistics file will not be created), until the feed is restarted and the end of the export period is reached.

Example: when the file **04062015144019-04062015144119.CSV** is completed, the statistics file **04062015144019-04062015144119.stat** is created.

The statistics file is a text file with a single line of text; the following values are listed, in that order, separated by a comma:

- Beginning of the export period
- End of the export period
- Host name
- CSV streaming feed name
- Directory (under **/var/TKLC/ixp/StoreExport**) where the CSV files are located
- *(useless value)*
- Number of xDRs
- File size (in bytes)
- *(useless value)*

Example of the content of a statistics file:

04/06/2015 16:40:19,04/06/2015 16:41:18,ixp1001-1c,CSVFeed2,/remote1/CSVFeed2,1,1064,576728,0

## Appendix I: My Oracle Support (MOS)

---

MOS (<https://support.oracle.com>) is your initial point of contact for all product support and training needs. A representative at Customer Access Support (CAS) can assist you with MOS registration.

Call the CAS main number at 1-800-223-1711 (toll-free in the US), or call the Oracle Support hotline for your local country from the list at <http://www.oracle.com/us/support/contact/index.html>. When calling, make the selections in the sequence shown below on the Support telephone menu:

1. Select 2 for New Service Request
2. Select 3 for Hardware, Networking and Solaris Operating System Support
3. Select 2 for Non-technical issue

You will be connected to a live agent who can assist you with MOS registration and provide Support Identifiers. Simply mention you are a Tekelec Customer new to MOS.

MOS is available 24 hours a day, 7 days a week, 365 days a year.

## Appendix J: Locate Product Documentation on the Oracle Technology Network Site

---

Oracle customer documentation is available on the web at the Oracle Technology Network (OTN) site, <http://docs.oracle.com>. You do not have to register to access these documents. Viewing these files requires Adobe Acrobat Reader, which can be downloaded at [www.adobe.com](http://www.adobe.com).

1. Log into the Oracle Technology Network site at <http://docs.oracle.com>.
2. Under Industries, click the link for Oracle Communications documentation.  
The Oracle Communications Documentation window opens with Tekelec shown near the top.
3. Click Oracle Communications Documentation for Tekelec Products.
4. Navigate to your Product and then the Release Number, and click the View link (the Download link will retrieve the entire documentation set).
5. To download a file to your location, right-click the PDF link and select Save Target As.