

**Oracle® Communications
Performance Intelligence Center**

Maintenance Guide

Release 10.2.1

E77489-01

June 2017

Copyright © 2003, 2017 Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notices are applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.



CAUTION: Use only the guide downloaded from Oracle Help Center (OHC).

Refer to Appendix section for instructions on accessing My Oracle Support and Oracle Help Center.

Table of Contents

Chapter 1: About This Help Text.....	7
Scope And Audience	7
Related Publications	7
Requirements and Prerequisites.....	7
Hardware Requirements	7
Software Requirements	7
Reference Documents.....	8
Chapter 2: Disaster Recovery Procedures on ODA/ZFS	10
DR of single or multiple Data Record Storage Server	10
ODA Physical Server Disaster	10
ODA_BASE Disaster	10
Data Record Storage Server database re-creation	11
DR of ZFS	12
Chapter 3: Management Server Disaster Recovery Procedures	13
Management Server	13
Restore Realm Backup	14
Recover Database	15
Recover Management Server Database	15
Recover the wallet and oracle DB connections	16
Management Server Post-Install Sanity Check	17
Chapter 4: Acquisition Disaster Recovery Procedures.....	18
Acquisition Server Disaster Recovery	18
Reinstall Operating System.....	18
Install Acquisition Application	18
Chapter 5: Mediation/ Data Record Storage Server Disaster Recovery Procedures.....	19
Mediation/ Data Record Storage Server Disaster Recovery Overview.....	19
Data Record Storage disaster recovery procedure.....	19
PDU Storage server disaster recovery procedure	20
Mediation Base server disaster recovery procedure.....	21
Stop IXP Service.....	21

Disintegrate Server with the Mediation Subsystem	21
Integrate Server with the Mediation Subsystem	21
Remount Export Directories	22
Chapter 6: IP Changes Procedure	23
IP Change Overview	23
Management IP Change Procedure	23
Acquisition subsystem IP Change Procedure.....	23
Change IP Addresses.....	24
Change VIP Addresses.....	24
Change IP Address Acquisition subsystem in Management	24
Mediation Subsystem IP Change Procedure.....	24
Data Record Storage Server IP Change Procedure	26
Chapter 7: Management Server Maintenance Procedures.....	29
Management Server Backup Procedures	29
Automatic Backup.....	29
Management Server Database Backup.....	31
Realm Backup	32
System Files Backup.....	32
Copy Management Backup	32
EPI and Plugin Configuration for Tracing	34
EPI Configuration	34
Configuring Plugins.....	36
Configure Mail Server (Optional)	42
Configure Authenticated Mail Server (Optional)	43
Configure SNMP Management Server (Optional).....	43
Modify WebLogic Administration Password (Optional)	44
Configure Session Timeout (Optional).....	44
Configure External LDAP (Optional).....	44
Configure the default settings for the new users (Optional).....	45
Configure CSV streaming feed feature (Optional)	45
Configure FSE automated update (Optional).....	45
Configure NSP FTP or SFTP Server	46
Modify Database Password	46

Sync Database Credentials.....	47
Modify Wallet Password	47
Chapter 8: Acquisition Maintenance Procedures	49
Procedure to enable/disable timestamp resolution to nanoseconds	49
Falco Firmware upgrade procedure.....	49
Key exchange procedure with Neptune probe	49
Add New Server in the Integrated Acquisition sub-system	49
Change the hostname of the Probed Acquisition Server.....	50
Remove Server from the Integrated Acquisition sub-system.....	52
Chapter 9: Mediation Maintenance Procedures	53
Offload DFPs from the Mediation Server	53
Configure PDU Storage Parameters.....	54
Enable/disable Write Access to the PDU Mounts	55
Enable/disable Write Access to the PDU Mounts for TPD based storage	56
Set Behavior Mode for Data Record Storage Server.....	56
Re-Sync the Mediation Configuration.....	57
Add Server to the Mediation Subsystem	57
Add Mediation Server to the Mediation Subsystem in Management/CCM.....	59
Remove Server from the Mediation Subsystem	60
Change Mediation network interface type to Bonding	61
Installation of External Datawarehouse	62
Setup NFS Mount for DataFeed Application on Customer Provided Server	62
Setup NFS Mount for DataFeed Application on TPD based platform.....	62
Setup NFS Mount for DataFeed Application on Standard Platform.....	63
External Storage Configuration using NFS on ODA.....	64
Data Record Storage installation on HP	64
Data Record Storage Post-Integration Configuration	65
Activate Session Compression.....	65
Change Default Passwords of Oracle Accounts (optional)	66
Chapter 10: External Software Configuration	67
Java Runtime settings	67
IE Browser Settings	67

Chapter 11: Knowledge Base Procedures	68
How to mount the ISO file via iLO.....	68
Configure and Verify ILO Connection.....	68
Granting and revoking DBA role to NSP user.....	69
Revoke DBA role from NSP user after NSP installed on one box	69
Grant DBA role to NSP user after NSP is installed on one box.....	70
Chapter 12: How to access console of VM in oda	72
Appendix A: My Oracle Support	73

Chapter 1: About This Help Text

Scope And Audience

This document describes the procedures to maintenance "Oracle Communications Performance Intelligence Center" system at Release 10.2.1. This document covers disaster recovery procedures, IP change procedures as well as various application specific procedures.

This document is intended for use by trained engineers in software upgrade. A working-level understanding of oracle database, Linux and command line interface is expected to successfully use this document.

It is strongly recommended that prior to performing any operations, the user read through this document.

Note: The procedures in this document are not necessarily in a sequential order. There are flow diagrams and high-level overview procedures chapter that provide the sequence of the procedures for each component of the system. Each procedure describes a discrete action. It is expected that the individuals responsible for maintenance of the system should reference these flow diagrams and high-level overview procedures during this process

Related Publications

For information about additional publications that are related to this document, refer to the Release Notice document. The Release Notice document is published as a part of the Release Documentation and is also published as a separate document on the Oracle Technology Network Site.

Requirements and Prerequisites

Hardware Requirements

Refer DocId E77486, [Hardware Guidelines](#) of Performance Intelligence Center

Software Requirements

The following software is required for the Performance Intelligence Center 10.2.1.

Oracle Communication GBU deliverables:

- Management Server
- Mediation Server
- Mediation Protocol
- Acquisition Server
- TADAPT
- TPD
- TVOE
- PM&C
- Oracle Linux 7 for x86_64 bit

All the software must be downloaded from Oracle Software Delivery Cloud (OSDC).

<https://edelivery.oracle.com/>

Please refer to KM notes:

Title	MOS
Oracle Linux on Third-Party Server Installation Guide for Performance Intelligence Center	KM_2061666.1
Oracle 12c ASM and Database on Third-Party Server Installation Guide for Performance Intelligence Center	KM_2151499.1
Oracle ASM and Database on Third-Party Server Installation Guide for Performance Intelligence Center	KM_2062491.1
Management Server (NSP) on Third-Party Server Installation Guide for Performance Intelligence Center	KM_2062544.1
Performance Intelligence Center Data WareHouse Server (DWS) on Third-Party Server Installation Guide	KM_2028670.1
Performance Intelligence Center Packet Data Unit Storage (PDU) on Third-Party Server Installation Guide	KM_2034894.1
Management Server (NSP) on Third-Party Server Installation Guide for Performance Intelligence Center release 10.2.1	KM_2164544.1
Management Server (NSP) on TPD system Installation Guide for Performance Intelligence Center Products	KM_2251899.1
SRDC - How to Collect NSP Logs	KM_1679525.1
MOS Oracle Database Appliance - 12.1.2 and 2.X Supported ODA Versions & Known Issues (Doc ID 888888.1)	KM_888888.1
ZFS refer to MOS Oracle Support Document 2021771.1 (Oracle ZFS Storage Appliance: Software Updates)	KM_2021771.1

Note: In case of Disaster Recovery for DRS server installed before PIC 10.2, the release of PIC 10.1 must be considered.

Reference Documents

- [1] [PIC 10.1.0 Installation Document](#), E53508
- [2] [PIC 10.2.1 Installation document](#), E77485-01
- [3] [PIC 10.2.1 Upgrade document](#), E77487-01
- [4] [PIC 10.2.1 Quick Start Guide](#), E77482-01
- [5] [PIC Hardware installation Guidelines](#), E77486-01
- [6] [PM&C Disaster Recovery](#), E54388-02 Release 5.7 and 6.0, November 2014

- [7] [Platform 7.0 Configuration Procedure References](#), E53486, December 2014
- [8] [TPD Initial Product Manufacturing](#), E53017, December 2014
- [9] [OTD Administration Guide](#), E23389_01
- [10] [ODA Getting Started Guide](#), E22692-41, February 2015
- [11] [Teklec Default Passwords, CGBU_ENG_24_2229 \(restricted access, refer to Appendix A: My Oracle Support\)](#)
- [12] [ZFS Storage Appliance Installation Guide](#), E55847-01, December 2014
- [13] [ZFS Storage Appliance Administration Guide](#), E55851-01, December 2014
- [14] [ZFS Administration Guide](#), E19253-01



Performance Intelligence Center release 10.2.1 is using Comcol 7.3 with TPD 7.4

Chapter 2: Disaster Recovery Procedures on ODA/ZFS

DR of single or multiple Data Record Storage Server

ODA Physical Server Disaster

The procedure is executed if the physical server on ODA becomes non functional because of hardware failure. This is essentially a re-installation of the ODA setup, and creating all the previously hosted database.



Warning: Data from this Data Record Storage are lost because of the hardware failure and re-installation

1. Set the Data Record Storage Server in maintenance mode by using [Set Behavior Mode for Data Record Storage Server](#)
2. Refer to **Chapter SYSTEM CONFIGURATION ON ODA** of Installation document [PIC 10.2.1 Installation document](#)
 - a. Perform steps in section **OS installation**,
 - b. Perform steps in section **ODA_BASE Template deployment**
 - c. Perform steps in section **Creation of DRS database with ODA_BASE configurator**
 - d. Perform steps in section **MEDIATION user and tablespaces creation**.

Note: If the ODA was hosting multiple Data Record Storage Server database, then step c) and d) should be repeated for all the database.

3. Refer to Chapter **MEDIATION APPLICATION INSTALLATION PROCEDURES of Installation document [PIC 10.2.1 Installation document](#)**
 - a. Perform steps in section **Mediation Server Pre-Install Configuration**,
 - b. Perform steps in section **Install Mediation Server**
4. If the Data Record Storage Server was **active** before the DR, reset it to active mode using [Set Behavior Mode for Data Record Storage Server](#)

ODA_BASE Disaster

The procedure is executed if the (ODA_BASE) dom1 virtual machine becomes non functional. This is essentially a re-deployment of the ODA_BASE server, and creating all the previously hosted database.



Warning: Data will be lost.

1. Set the Data Record Storage Server in maintenance mode by using [Set Behavior Mode for Data Record Storage Server](#)
2. Refer to **Chapter SYSTEM CONFIGURATION ON ODA** of Installation document [PIC 10.2.1 Installation document](#)
 - a. Perform steps in section **OS installation**,
 - b. Perform steps in section **ODA_BASE Template deployment**

- c. Perform steps in section **Creation of DRS database with ODA_BASE configurator**
- d. Perform steps in section **MEDIATION user and tablespaces creation.**

Note: If the ODA was hosting multiple Data Record Storage Server database, then step c) and d) should be repeated for all the database.

- 3. Refer to Chapter **MEDIATION APPLICATION INSTALLATION PROCEDURES of Installation document [PIC 10.2.1 Installation document](#)**
 - a. Perform steps in section **Mediation Server Pre-Install Configuration,**
 - b. Perform steps in section **Install Mediation Server**
- 4. If the Data Record Storage Server was **active** before the DR, reset it to active mode using [Set Behavior Mode for Data Record Storage Server](#)

Data Record Storage Server database re-creation

The given procedure should be executed in case the particular Data Record Storage Server database on ODA suffered disaster and become non functional, but the oda_base server itself is working fine. In this case it will be sufficient to re-create the Data Record Storage Server database using oakcli command after clean up of previous database.

Note: This procedure normally should not impact the other Data Record Storage Server databases if present on the same ODA.

- 1. Set the Data Record Storage Server in maintenance mode by using [Set Behavior Mode for Data Record Storage Server](#)
- 2. Drop the database by using following steps.
Database should be up before deleting.

Log on to oracle box using root user and execute below commands

```
# oakcli show databases

# oakcli delete database -db <db_name>

# oakcli delete dbhome -oh <oracle_home>
```

Where <db_name> is the Data Record Storage Server database name and <oracle_home> is oracle home for Data Record Storage Server database.

Note : The deletion of database will require multiple times oracle user password

- 3. Refer to **Chapter SYSTEM CONFIGURATION ON ODA of Installation document [PIC 10.2.1 Installation document](#)**
 - a. Perform steps in section **Creation of DRS database with ODA_BASE configurator**
 - b. Perform steps in section **MEDIATION user and tablespaces creation**
- 4. Refer to Chapter **MEDIATION APPLICATION INSTALLATION PROCEDURES of Installation document [PIC 10.2.1 Installation document](#)**
 - a. Perform steps in section **Mediation Server Pre-Install Configuration**
 - b. Perform steps in section **Install Mediation Server**
- 5. If the Data Record Storage Server was **active** before the DR, reset it to active mode using [Set Behavior Mode for Data Record Storage Server](#)

Note: IxpStore process on the mediation server should be restarted, after the above procedures are completed.

DR of ZFS

Performance Intelligence Center does not support disaster recovery on ZFS server. In case of disaster e.g. hardware failure, disk failure on ZFS storage appliance following documentation can be referred:

- [ZFS storage appliance administration guide](#)
- Chapter 11 in ZFS administration guide, <http://docs.oracle.com/cd/E19253-01/819-5461/>

1. Disconnect the PDU directories shared by the ZFS

As root, on each server of the subsystem, run:

```
# /usr/TKLC/plat/sbin/rootSshLogin --permit
```

On one server of the subsystem, as root, backup the bulkconfig file:

```
# cp /root/bulkconfig /root/bulkconfig.bak
```

Then, edit the bulkconfig file. Locate the lines starting with the `pdu` keyword, followed by the IP of the ZFS, and remove them. As root, adjust the subsystem PDU settings with the following command:

```
# bc_adjust_subsystem.sh
```

2. DR the ZFS

Refer documents [ZFS storage appliance administration guide](#)

3. Reconnect the PDU directories shared by the ZFS

On the server of the subsystem, where the bulkconfig file has been backed up, as root, run:

```
# mv -f /root/bulkconfig.bak /root/bulkconfig
```

As root, adjust the subsystem PDU settings with the following command:

```
# bc_adjust_subsystem.sh
```

As root, on each server of the subsystem, run:

```
# /usr/TKLC/plat/sbin/rootSshLogin --revoke
```

Chapter 3: Management Server Disaster Recovery Procedures

Management Server

This procedure describes the disaster recovery procedure of the Management Server. This procedure is a highlevel procedure and some of the complex parts are referenced from different procedures.

Note: In order to avoid alarm flooding when Management Server will restart, JMX agents can be stopped on all system before executing management server recovery procedure and restarted after. Pending alarms will be lost.

All systems (Mediation, Acquisition, Management) retained alarms in their JMX agent during Management server unavailability. When management server restarts, it would receive numerous alarms. It may slow down restart phase and introduce delay (Proportional to unavailability period), before Management Server returns to a normal state.

Note:

- The latest global backup must be copied to the external server before starting the DR. Copy the backup from external server to the management server box at “/opt/oracle/backup/”, before the nsp application installation i.e. before executing “install_nsp.sh”. We recommend to verify the backup content. As explained in the “backup section” of the document [PIC 10.2.1 Upgrade document](#)
- During execution of “install_nsp.sh”, user will be prompted to enter the NSP database password. In case database password is never changed, provide the default password else provide the latest NSP database password.

1. Install Management Server using Management Server (NSP) on Third-Party Server-KM_2164544.1 or on TPD KM_2251899.1
2. Check permission for backup directory
Execute following commands as root:

```
# cd /opt/oracle/backup
# chmod a+w nsp_backup_timestamp
# chown root:root nsp_backup_timestamp
```

Where nsp_backup_timestamp refers to the backup directories created nightly



Note: Management Server creates two different types of backups

- Backup is generated nightly on oracle server in /opt/oracle/backup/NSP_BACKUP_XX folders. This is the online backup based on an oracle dump to be used during this Disaster recovery procedure.
- An other type of backup is created just before upgrade on oracle server in /opt/oracle/backup/upgrade_backup. This backup is used with backout procedure. This is the offline backup based on database file copy and must not be used During Disaster recovery procedure.

3. **Restore the database and realm**

Following the steps:

- a. [Restore Realm Backup](#)
- b. [Recover MGMT Database](#)

4. Reboot the server

5. Log in on the server and Run the install script for builders

As root, run:

```
# cd /opt/nsp/scripts/oracle/cmd
# ./install_builder.sh
```

Note: Use the same builder ISO which was used before DR.

6. Set Global Names to false

```
# su - oracle
# sqlplus / as sysdba
# ALTER SYSTEM SET GLOBAL_NAMES=FALSE;
```

7. Perform NSP Post-Install Sanity Check

Follow the step [NSP Post-Install Sanity Check](#)

If Management Server did not install successfully, refer to [Appendix A: My Oracle Support](#) with the NSP log files defined in the document [KM_1679525.1](#). You can extract them also with the following script:

```
#tarNSP
```

Restore Realm Backup

This procedure describes how to restore the Management Server realm backup.

NOTE: During Disaster recovery the Nightly Backup present at /opt/oracle/backup/ folder with names NSP_BACKUP_dd_mm_yy_hh_mm_ss must be used

1. Log in as root on Management Server all following commands are executed as root
2. Execute the following commands:

Note: Make sure the backup is from the same Management Server release which needs to be imported. You can check the release in the NSP_BACKUP_xxxx by opening it in a wordpad and read the iso_version of global_versions.properties.

Note: Make sure the backup directory is owned by tekelec user. If not change ownership to tekelec before running command below

```
# cd /opt/nsp/scripts
# ./LaunchImpNSPrealm.sh backup_dir
```

Where backup_dir is the directory which contains the backup of realm data (e.g. /opt/oracle/backup/NSP_BACKUP_10_14_10_22_00_01/)

Recover Database

Recover Management Server Database

This section describes the various steps and methods for using import utility to restore Management Server database.

1. Prerequisites for using Import Utility to Restore a Database

The import procedure reloads a previous export file, partially or completely, back into an Management Server database. All following scripts must be run as OS user root.

Restoring the database can occur for a variety of reasons and it is not possible to provide automatic restoration procedures for every case.

- Prerequisite for restoring a database

Management Server data backup is required as a prerequisite for restore process. During the oracle restore operation the weblogic service must be stop to avoid any user connection

Note: Check the ownership of the directory “/opt/oracle/backup”. If the ownership is not oracle:oinstall, perform the below step:

As root user

```
# chown oracle:oinstall /opt/oracle/backup
```

Note: Ensure that the directory containing database dump to restore has write permissions for oracle user.

Otherwise use the following command to set write permission:

```
# chmod a+r+w+x <DIR_CONTAINING_DUMP>
```

Note: Check the ownership of ExpNSP.dmp.gz inside the <DIR_CONTAINING_DUMP>. If the ownership is not oracle:oinstall, perform the below step

As root user go to folder <DIR_CONTAINING_DUMP>:

```
# chown oracle:oinstall ExpNSP.dmp.gz
```

- Common reasons for restoring a database
 - Disk failure
 - Hardware extension
 - Accidental deletion of data by operator
 - Migration
 - Transfer on another server
 - Reprocessing of archives

2. Import utility

The results provided by the backup are standard dump files produced by Oracle. They must be put online again to be able to import them. Importing of saved data occurs with

the import utility provided by Oracle. The scripts are provided with an Management Server database installation

The Import scripts are located in the installation directory of the Management database `/opt/nsp/scripts/oracle`.

This directory contains the three same subdirectories listed in **Export scripts**:

- `cmd` - contains OS shell scripts
- `sql` - contains SQL procedures called by the shell scripts
- `trc` - contains traces or output files location

a) Log in as `root` on Management Server and launch the command:

```
# service nspservice stop
```

b) Login as `root` user on Management Server for one-box and launch the command:

```
# cd /opt/nsp/scripts/oracle/cmd
# ./RestoreDatabase.sh NSP/NSP NSP NSP <backup_dir>
```

The command restores the Management Server database after stopping the Oracle listener. After the restore is complete the Oracle listener is restarted.

The script has four parameters:

- Oracle connection string (NSP/NSP) must not be modified
- Name of the exported schema name (NSP) must not be modified
- Target schema name (NSP) must not be modified
- The `backup_dir` is the path of the directory which contains the exported database file (**ExpNSP.dmp**).

c) Check the generated log files in `/opt/nsp/scripts/oracle/trc` directory for possible errors.

d) Log in as `root` on Management Server and launch the command:

```
# service nspservice start
```

Recover the wallet and oracle DB connections

Use the same daily backup directory, as for Realm and Database restoration

1. As tekelec user replace existing ewallet.p12 and cwallet.sso

```
# cd /u01/app/oracle/product/12.1.0/dbhome_1/wallet
# cp /usr/TKLC/nsp/<BACKUP_DIR>/wallet/cwalet.sso cwallet.sso
# cp /usr/TKLC/nsp/<BACKUP_DIR>/wallet/ewallet.p12 ewallet.p12
# chown oracle: oinstall ewallet.p12
# chown oracle: oinstall cwallet.sso
```

2. As root user replace existing tnsnames.ora and sqlnet.ora located

```
# cd /u01/app/oracle/product/12.1.0/dbhome_1/network/admin
```

```
# cp /usr/TKLC/nsp/<BACKUP_DIR>/wallet/network/admin/sqlnet.ora sqlnet.ora
# cp /usr/TKLC/nsp/<BACKUP_DIR>/wallet/network/admin/tnsnames.ora tnsnames.ora
# chown oracle: oinstall sqlnet.ora
# chown oracle: oinstall tnsnames.ora
```

3. As tekelec user Update credentials in IXP-Base and xMF servers (optional step):

```
# cd /opt/nsp/scripts/oracle/cmd/
# sh syncFiles.sh
```

Management Server Post-Install Sanity Check

1. Open a terminal window and log in as root on the Management Server
2. As root, run:

```
# /opt/nsp/scripts/procs/post_upgrade_sanity_check.sh
```
3. Review the Management Server installation logs (/var/log/nsp/install/nsp_install.log).
4. Verify the following:
 - Port 80 connectivity is NOT OK
 - Oracle server health is OK
 - WebLogic health for ports 5556, 7001, 8001 is OK
 - Log on to weblogic console and Verify the following:
 - All servers are in running and in OK state
 - Application deployments are in Active and OK state.

Chapter 4: Acquisition Disaster Recovery Procedures

Acquisition Server Disaster Recovery

Reinstall Operating System

In case of real hardware the server must be IPM with TPD using steps mentioned below

Refer to [PIC 10.2.1 Installation document](#) for IPM instructions.

Or

In case of virtual machines the Operating system must be re-installed using following procedure:

Section “**Guest OS Re-installation**” from [PIC 10.2.1 Installation document](#)

Install Acquisition Application

Refer to [PIC 10.2.1 Upgrade document](#)

Chapter 5: Mediation/ Data Record Storage Server Disaster Recovery Procedures

Note: It must be required to give root ssh access before executing many procedures. Please give the access and then revoke it after completing the procedures, as mentioned below

```
# /usr/TKLC/plat/sbin/rootSshLogin -permit
```

```
# /usr/TKLC/plat/sbin/rootSshLogin -revoke
```

Mediation/ Data Record Storage Server Disaster Recovery Overview

This section describes how to execute a disaster recovery procedure on the Mediation server.

The procedure is applicable to the following server types:

- Data Record Storage Server
- PDU Storage Server
- Mediation Base Server

The procedure is applicable to the following hardware types:

- HP Gen8 Rackmount
- HP Gen9 RackMount
- ODA

Note: In case of DR performed on the DRS and PDU server based on TPD platform, the xDRs and PDUs stored already shall be preserved.

Data Record Storage disaster recovery procedure

Check the Oracle version on the Data Record Storage Server as root with the following command:

```
# rpm -q tklc-oracle-dbms
```

If Oracle 10g is installed, the disaster recovery procedure can not be applied and you have to go for a new installation (refer to [PIC 10.2.1 Installation document](#), section of flow chart for DRS server) and the data are not preserved.

During the disaster recovery procedure of Data Record Storage Server, applicable to 11g or 12c, you must install the same version of the Oracle database as the current one.

If Oracle 11g is currently installed then the PIC 10.1 software release for DRS must be used.

Standard server Data Record Storage Server disaster recovery procedure

Follow the references below in a sequential order to recover the Data Record Storage server.

1. **Set the Data Record Storage server in maintenance mode, follow [Set Behavior Mode for Data Record Storage Server](#)**

2. Refer to the KM notes for “Data WareHouse Server” mentioned in section [Requirements and Prerequisites](#)
3. If the Data Record Storage Server was active before the DR, reset it in active mode using [Set Behavior Mode for Data Record Storage Server](#)

ODA Data Record Storage Server disaster recovery procedure

Refer Chapter 2.1

HP or X6-2L Data Record Storage Server disaster recovery procedure

Follow the references below in a sequential order to recover the Data Record Storage server.

1. Set the Data Record Storage server in maintenance mode, follow [Set Behavior Mode for Data Record Storage Server](#)
2. Refer to [PIC 10.2.1 Installation document](#), Section 6 DWS Installation Procedures
Note:
 - bulkconfig file must contain DR-XDR platform function value.
 - execute all the other steps until Integration to customer network (this is the last step of the Data Record Storage Server Installation procedure to execute).
3. If the Data Record Storage Server was active before the DR, reset it in active mode using [Set Behavior Mode for Data Record Storage Server](#)

PDU Storage server disaster recovery procedure

Standard server PDU Storage Server disaster recovery procedure

In case the PDU storage server is based on **standard Oracle Linux** platform then DR shall involve the fresh installation using the KM notes for “Packet Data Unit Storage” mentioned in section [Requirements and Prerequisites](#).

Mediation PDU Storage server disaster recovery procedure

Note on Mediation Server: It is recommended to redistribute DFPs assigned to the recovering server to other mediation server in the mediation subsystem. Any DFPs assigned to recovering server will not be functional during disaster recovery. Refer to Offload DFPs from the Mediation Server.

The PDU storage server is part of the mediation sub-system and supports base server processing.

Follow the references below in a sequential order to recover the Mediation PDU Storage server:

1. Stop IXP service using [Stop IXP Service](#) (if the server is accessible)
2. Disintegrate Server with Mediation Subsystem [Disintegrate Server with the Mediation Subsystem](#)
3. Refer to [PIC 10.2.1 Installation document](#), Section “Mediation Subsystem” installation procedures.
Note:
 - bulkconfig file must contain DR-PDU platform function value.
4. Integrate Server with in mediation sub-system using [Integrate Server with the Mediation Subsystem](#)
5. Remount Export Directories using [Remount Export Directories](#)

Mediation Base server disaster recovery procedure

Follow the references below in a sequential order to recover Mediation Base server: [Mediation PDU Storage server disaster recovery procedure](#), with the following differences:

- In the bulkconfig file, use DR-BASE as the platform function value (instead of DR-PDU).
- If the server is a virtual machine, follow the section “Mediation Guest OS reinstallation” from [PIC 10.2.1 Installation document](#) (instead of the section “Mediation Subsystem”)

Stop IXP Service

This procedure describes how to stop the IXP service on the mediation server.

Open a terminal as root on the mediation server:

```
# service TKLCixp stop
```

Disintegrate Server with the Mediation Subsystem

This procedure describes how to disintegrate an mediation server with the mediation subsystem.

1. Analyze subsystem

- a) Open a terminal window and log in to any mediation server in the mediation subsystem, except the server you want to disintegrate.
- b) Check that the subsystem is in good shape. As cfguser, run:

```
$ analyze_subsystem.sh
```

Analyze the output of the script for errors. Issues reported by this script must be resolved before any further usage of this server. Verify no errors are present (ignore error messages regarding the server that is going to be disintegrated for the subsystem).

If errors occur, refer to [Appendix A: My Oracle Support](#)

2. Remove a host record from the bulkconfig file

- a) As root user, remove a host record with the server you want to disintegrate from the /root/bulkconfig file.
- b) Make sure now the /root/bulkconfig file contains all remaining servers in the subsystem with valid parameters.

3. Update mediation subsystem servers

- a) Run the following script to adjust the mediation subsystem network and other settings accordingly to the /root/bulkconfig file. As root run:

```
# /usr/TKLC/plat/sbin/rootSshLogin --permit
```

```
# bc_adjust_subsystem.sh
```

- b) Wait until system reconfigures.
- c) Verify that the mediation subsystem has been reconfigured correctly. As root run:

```
# bc_diag_bulkconfig.sh -a
```

If any error occurs refer to [Appendix A: My Oracle Support](#)

Integrate Server with the Mediation Subsystem

This procedure describes how to integrate recovered server with the mediation subsystem.

1. **Add a host record to the bulkconfig file with the recovered server**
 - a) Open a terminal window and log in to the recovered server as root user.
 - b) Recreate the /root/bulkconfig file. You can copy the content of the /root/bulkconfig from any other server in the mediation subsystem.
 - c) Add a host record for the recovered server with the valid information into the /root/bulkconfig file.
 - d) Make sure now the /root/bulkconfig file contains all servers in the subsystem with valid parameters.
2. **Restore shared directories and Data Feed status**
 - a) Restore possible shared directories by running, as root:

```
# ixp_postinstall_restore.sh
```
 - b) Restore Data Feed status by running, as root:

```
# RestoreDataFeedStatus.sh --local
```
3. **Update Mediation subsystem**
Refer to **Update mediation subsystem servers**.
4. **Sync Database Credentials**
Execute procedure in section 7.17 **Sync Database Credentials**
5. **Copy the xDR Builder rpm if not present**
 - a) Login into Management Server as root user and execute the below command to check if the xDR builder rpm is present.

```
$ ls /var/TKLC/jmxagent/upload/
```

If the above command shows the xDR builder rpm then do not execute step b).
 - b) Copy the xDR builder rpm to path /var/TKLC/jmxagent/upload/
Note: xDR builder rpm which is mentioned in load line up
6. **Install the xDR Builder package**
All servers in the Mediation subsystem must have the same xDR builders package.
As cfguser run:

```
$ server_builder_installer.sh -f xdr_builder_rpm_filename
```

Where *xdr_builder_rpm_filename* is the name of the builder *.rpm package already uploaded in the Management Server and associated to this subsystem.

Remount Export Directories

This procedure describes how to remount export directories for DataFeed application purpose. This procedure is applicable to any DataFeed application hosts (Mediation servers). Run this procedure on each DataFeed host that uses his particular Export File Server as an export feed target.

1. **Open a terminal window and log in on the DataFeed application host server as cfguser.**
2. **Unmount the directories. As cfguser run:**

```
$ sudo umount /opt/TKLCdataexport/mount/*
```
3. **DataFeed will mount exporting directories back by itself.**

Chapter 6: IP Changes Procedure

The Performance Intelligence Center IP change procedure are defined for the system which are installed over TPD platform.

IP Change Overview

The IP change procedure is applicable to already configured system that is in running state.

The procedure below depicts an overall IP change procedure. If some of the components are not meant to be migrated to new network settings skip this step. Otherwise you must follow the sequence.



Note: This procedure must be run via ILO

- 1. Disable all feeds associated with Mediation subsystems**

Note: Execute this step if you are going to migrate Mediation subsystem.

- Open a web browser and log in to Management Server application interface and navigate to **DataFeed** application.
 - Click on **xDR/KPI Feeds** and deactivate all feeds that are associated with the Mediation subsystems that going to be migrated to new network settings
- [Management Server IP Change Procedure](#)
 - [Acquisition subsystem IP Change Procedure](#)
 - [Mediation Subsystem IP Change Procedure](#)
 - [Data Record Storage Server IP Change Procedure](#)
 - 6. Enable all feeds associated with Mediation subsystems**

Note: Execute for all feeds that has been deactivated before IP change procedure.

- Open a web browser and log in to Management Server application interface and navigate to **DataFeed** application.
- Click on **xDR/KPI Feeds**
- Check feed associated with the affected Export Server(s)
- Click on **Modify** icon and navigate to IP address of Export Server. e) Change the IP address and save changes. **Activate** the feed.
- Repeate steps c-e for all affected feeds.

Management IP Change Procedure

For Management Server, which is no more TPD based with 10.2.1, the IP change procedures is no more provided and has to be managed by the customer.

Acquisition subsystem IP Change Procedure

Use this procedure to change IP addresses of an Acquisition Subsystem.

Note: This procedure must be run via ILO

Change IP Addresses

Run this procedure as root:

1. Update the `/root/bulkconfig` file with new IP addresses
2. Run `bulkconfig` script:

```
# /opt/TKLCmf/bin/bulkConf.pl
```
3. Reboot the server

Change VIP Addresses

Note: This is run on the primary server only

1. Login to **primary** server as **cfguser**
2. Run `setSSVIP` script:
 - If the Acquisition server is standalone Probed server then execute following command:

```
setSSVIP -s
```
 - If the Acquisition server is primary server of integrated acquisition sub-system then execute following command:

```
setSSVIP <VIP>
```

Where <VIP> is VIP address of the acquisition sub-system

Change IP Address Acquisition subsystem in Management

1. Login to the Management Server GUI and navigate to **Centralized Configuration** Application
2. Navigate to **Equipment Registry** in Left Tree Panel
3. Click on **XMF** ☉ **xMF Subsystem**
4. Modify the servers and change **IP address** field to the new IP address
5. Check if the IP address and VIP address are correctly updated for Acquisition subsystem
6. Navigate to **Acquisition** in Left Tree Panel
7. **Apply Changes** on Acquisition
8. Verify that traffic is properly received by Mediation

Mediation Subsystem IP Change Procedure

This procedure describes how change the IP settings on the mediation subsystem.

Use this procedure in following cases:

- Server/Subsystem IP change
- Netmask change
- Default gateway change

This procedure uses the `/root/bulkconfig` file as an input of the changed IP addresses. User must be familiar with this file before executing this procedure.



Note: This procedure must be run via ILO

1. **Update the bulkconfig file**
 - a. Login to the iLO as root of any Mediation server in the subsystem you are about to reconfigure
 - b. Update the /root/bulkconfig file with the new IP addresses
2. **Run IP change procedure**
 - a. Run the Mediation subsystem IP change procedure as root:

```
# bc_changeip_subsystem.sh
```
 - b. The Mediation subsystem healthcheck procedure will be triggered.
 - c. If the healthcheck procedure will end with no errors then the script will automatically continue with the IP change procedure. If there will be errors you will be asked for confirmation if you want to continue. In such case, refer to [Appendix A: My Oracle Support](#) before answering.
 - d. If you migrate the Mediation subsystem in a scope of a single network the script will run until the end and there is no additional operation needed.
 - e. Perform any hardware related configuration like cabling etc.
 - f. Log in to the server where you have previously updated the bulkconfig file as root and run:

```
# bc_changeip_subsystem.sh --finish
```

Wait until the procedure finishes. Check for any errors. In case of any errors refer to [Appendix A: My Oracle Support](#)

Note: These steps mentioned in point 3, 4 and 5 have to be performed on the management server

3. **Change Mediation subsystem IPs in Management**
 - a. Login to the Management Server GUI and navigate to **Centralized Configuration** Application
 - b. Navigate to **Equipment Registry** in Left Tree Panel
 - c. Click on **IXP > IXP Subsystem**
 - d. Modify the servers and change **Admin IP address** field to the new IP address
4. **Change Mediation subsystem's VIP in Management Server**
 - a. Login to the Management Server GUI and navigate to **Centralized Configuration** Application
 - b. Navigate to **Equipment Registry** in Left Tree Panel
 - c. Click on **Mediation**
 - d. Modify the subsystem and change **VIP Address** field to the new IP address
 - e. Click **Modify**
 - f. **Execute Procedure 7.17 Sync Database Credentials**
5. **Apply changes**
 - a. Navigate to the **Mediation** view
 - b. Navigate to **Sites**

- c. Open **IXP** and right-click on the subsystem.
- d. Select **Apply changes...** from the popup menu.
- e. Click on the **Next** button
- f. Click on the **Apply Changes** button.
- g. Wait until changes are applied.
- h. Verify that result page does not contain any errors.

Data Record Storage Server IP Change Procedure

This procedure describes how change the IP settings on the Data Record Storage Server.



This procedure is applicable **only for the TPD based** Data Record Storage server.

For ODA or Standard Server, the IP change procedures is not provided and has to be managed by the customer.

Use this procedure in following cases:

- Server IP change
- Netmask change
- Default gateway change

This procedure uses the `/root/bulkconfig` file as an input of the changed IP addresses. User must be familiar with this file before executing this procedure.

Note: This procedure must be run via ILO

1. **Update the bulkconfig file**
 - a. Login to the iLO as root of the Data Record Storage Server server you are about to reconfigure
 - b. Update the `/root/bulkconfig` file with the new IP addresses
2. **Run IP change procedure**
 - a. Run the Data Record Storage Server subsystem IP change procedure as root:


```
# bc_changeip_subsystem.sh --pre
```
 - b. Continue with:


```
# bc_changeip_subsystem.sh --change
```
 - c. Continue with:


```
# bc_changeip_subsystem.sh --post
```
 - d. Finalize the IP change procedure on the Data Record Storage Server, as cfguser:


```
$ makeDWH.sh
```

Confirm, enter passwords where needed.

- e. Reconfigure the dbconsole

Log into the DRS server, as oracle user

```
# cd $ORACLE_HOME/bin  
# ./emca -deconfig dbcontrol db -repos drop
```

This command prompts to provide following information as :

```
Database SID:  
Listener port number:  
Password for SYS user:  
Password for SYSMAN user:
```

After providing these information the system asks for confirmation as :

```
Do you wish to continue? [yes(Y)/no(N)]:
```

After successful completion of command it gives following message :

```
INFO: Repository successfully dropped
```

Enterprise Manager configuration completed successfully

```
FINISHED EMCA at <DATE>  
# ./emca -config dbcontrol db -repos create
```

This command prompts to provide some information.

Provide only the mandatory information and let it take the default value.

The command prompts to provide following information :

```
Database SID:  
Listener port number:  
Listener ORACLE_HOME [ /opt/oracle11/oracle/product/11.2.0/dbhome_1 ]:  
Password for SYS user:  
Password for DBSNMP user:  
Password for SYSMAN user:  
Email address for notifications (optional):  
Outgoing Mail (SMTP) server for notifications (optional):  
ASM ORACLE_HOME [ /opt/oracle11/oracle/product/11.2.0/dbhome_1 ]:  
ASM SID [ +ASM ]:  
ASM port [ 1521 ]:
```

```
ASM username [ ASMSNMP ]:
```

```
ASM user password:
```

After providing these information the system asks for confirmation as :

```
Do you wish to continue? [yes(Y)/no(N)]:
```

After successful completion of command it gives following message :

```
Enterprise Manager configuration completed successfully
```

```
FINISHED EMCA at <DATE>
```

Note: These steps mentioned in point 3 and 4 have to be performed on the management server

3. Change Data Record Storage Server IP in Management Server

- a. Login to the Management Server GUI and navigate to **Centralized Configuration Application**
- b. Navigate to **Equipment Registry** in Left Tree Panel
- c. Click on **DWS > DWS Pool**
- d. Modify the Data Record Storage Server and change **Admin IP address** field to the new IP address
- e. Execute step of chapter 7 about **Modify Database Password** , with same password to create the tnsalias with new IP address.

4. Apply changes

- a. Navigate to the **Mediation** view
- b. Navigate to **Sites**
- c. Open **IXP** and right-click on the subsystem.
- d. Select **Apply changes...** from the popup menu.
- e. Click on the **Next** button
- f. Click on the **Apply Changes** button.
- g. Wait until changes are applied.
- h. Verify that result page does not contain any errors.

Chapter 7: Management Server Maintenance Procedures

Management Server Backup Procedures

Management Server backup procedures protect the Management Server system against the data loss and enables further data recovery during disaster recovery procedure.

Automatic Backup

Activate Automatic Management Server Backup

This procedure describes how to activate the automatic backup procedure.

The backup procedure is activated automatically at the time of Management Server installation. Automatic activation is performed using the cron task. The user can verify if the automatic backup is activated and if not then activate it by with this procedure.

1. **Verify if the backup is activated**
 - a. Login as `root` on Management Server - all following commands are executed as root
 - b. Check the cron job list

```
# crontab -l
```

Example of output when backup is already activated:

```
00 22 * * * . $HOME/.bash_profile; cd /opt/nsp/scripts/oracle/cmd; sh
./LaunchExpNSPdp.sh >../trc/cronNSP.log 2>&1
```

Here the backup procedure (`LaunchExpNSPdp.sh`) is scheduled for 22:00 (10:00 PM) every day

Example of output when backup is not activated:

```
no crontab for root
```

If no crontab is activated for `root`, then continue with the next step to activate the backup.

2. **Activate backup**

Run the following commands as root:

```
# cd /opt/nsp/scripts/oracle/cmd
# crontab crontab.nsp
```

3. **Verify if the backup is activated and functional**
 - a. Backup files are stored in the `/opt/oracle/backup/` directory on a daily basis on the Management Server. Each subdirectory contains a timestamp of the backup.

```
drwxrwxrwx 2 root root 4096 Jul 13 22:00 NSP_BACKUP_07_13_09_22_00_00
```

- b. For an Management Server, the directory structure is:
NSP_BACKUP_TIMESTAMP containing:
 - A log file. It contains any information useful to troubleshoot a backup error.
 - Database dump and log
 - LDAP backup
 - System files backup.

Deactivate Automatic Management Server Backup

This procedure describes how to deactivate automatic Management Server backup.

- a. Login as root on Management - all following commands are executed as root
- b. Check the cron job list

```
# crontab -l
```

If the output contains a record for LaunchExpNSPdp.sh then continue with the next step to remove this record. If the output does not contain a record for **LaunchExpNSPdp.sh** then the backup is not activated.

- c. Edit the contents of the crontab

```
# crontab -e
```

Search for the entry in the crontab activating **LaunchExpNSPdp.sh** and remove it. Then save the changes to the crontab file.

Example: If the contents of the crontab file was following:

```
# crontab -l
00 22 * * * . $HOME/.bash_profile; cd /opt/nsp/scripts/oracle/cmd; sh
./LaunchExpNSPdp.sh >../trc/cronNSP.log 2>&1
```

Change Automatic Management Server Backup Time and Location

Execute this procedure to change an automatic backup time or location

1. Change Automatic Management Server Backup Time

- a. Login as root on Management Server - all following commands are executed as root
- b. Check the cron job list

```
# crontab -l
```

If the output contains a record for LaunchExpNSPdp.sh then continue with the next step to remove this record. If the output does not contain a record for **LaunchExpNSPdp.sh** then the backup is not activated.

- c. Edit the contents of the crontab

```
# crontab -e
```

Search for the entry in the crontab activating LaunchExpNSPdp.sh and replace values of backup time with new values of backup time. Then save the changes to the crontab file.

Example: If the backup procedure has been scheduled for 22:00 every day then the crontab for automatic backup (**LaunchExpNSPdp.sh** record) will look like:

```
00 22 * * * . $HOME/.bash_profile; cd /opt/nsp/scripts/oracle/cmd; sh
./LaunchExpNSPdp.sh >../trc/cronNSP.log 2>&1
```

The first two fields denotes the backup time. If you have changed the backup time to 13:30 every day then the output will be following:

```
30 13 * * * . $HOME/.bash_profile; cd /opt/nsp/scripts/oracle/cmd; sh
./LaunchExpNSPdp.sh >../trc/cronNSP.log 2>&1
```

2. Change Automatic Management Server Backup Location

- a. To change the location of where the backup files are stored runs the following command.
As root run:
- b. Edit the **LaunchExpNSPdp.sh** file using a text editor. Replace any occurrence of `/opt/oracle/backup` with a different backup directory.
- c. Save changes.

Management Server Database Backup

This procedure describes different steps to be followed for taking logical backup of Management Server Oracle database. It is useful to have this backup in case of restoring the setup need arising from upgrade failure.

1. Login as a root user on Management Server Server - all following commands are executed as root
2. Create a directory having write permission for the Oracle user:

```
# mkdir /opt/oracle/backup
# chown -R oracle:oinstall /opt/oracle/backup
```

3. If you want to backup the Data Exported using xDR Browser then use the following commands:

```
# cd /opt/nsp/scripts/oracle/cmd
# ./ExpNSPdp.sh NSP/NSP NSP /opt/oracle/backup
```

Where `/opt/oracle/backup` is an existing directory with write access for oracle user where the backup file will be created.

This script has three parameters and constraints:

- Oracle connection string (NSP/NSP) must not be modified
- Schema name to export (NSP) must not be modified
- Destination directory for the generated dump file (full existing path on the server)
Copy this file `/opt/oracle/backup/ExpNSP.dmp` to a external source.

4. If you do not want to backup the Data Exported using xDR Browser then use the following commands:

Note: Use the following steps to export all Management Server schema except the table COR_EXPORT_FILE (that may contain an extremely large amount export data).

```
# cd /opt/nsp/scripts/oracle/cmd
# ./ExpNSPdPNoEXPT.sh NSP/NSP NSP /opt/oracle/backup
```

Where /opt/oracle/backup is an existing directory with write access for oracle user where the backup file will be created. Copy this file /opt/oracle/backup/ExpNSPNoEXPT.dmp to an external source.

Realm Backup

This section describes the various steps and methods for performing a backup of Realm data.

1. Login as root user on Management Server
2. Execute following commands to take back up. As root run:

```
# cd /opt/nsp/scripts
# cp -u
/usr/TKLC/nsp/nsp-package/framework/install/dist/install/post_installation/LaunchExpNSPr
ealm.sh
/opt/nsp/scripts
# mkdir /opt/nsp/realmbackup
# ./LaunchExpNSPrealm.sh /opt/nsp/realmbackup
```

3. Verify the backup exist in /opt/nsp/realmbackup. Now backup this directory to an external media.

System Files Backup

This procedure describes the various steps and methods for performing a backup of System data.

1. Login as root user on Management Server
2. Execute following commands to take back up. As root run:

```
# cd /opt/nsp/scripts
# ./ExpNSPSys.sh backup_directory
```

Where *backup_directory* is any directory with write access for root user where the backup file will be created.

Copy Management Backup

1. **Copy Management Server Backup**

Login to local machine which will be used to copy the nsp backup. Execute following command from the local machine

```
local_system_prompt>scp -r backup@nsp-ip:/path/to/backup/dir local_backup_dir
```

- It will ask for backup user password, enter the password for backup user and press ENTER.
 - **nsp-ip** should be replaced by the Management server's IP address
 - */path/to/backup/dir* should be replaced by exact path of backup on server. For example */opt/backup/backup/NSP_BACKUP_09_13_11_22_00_01*
 - To note exact path of the backup you can use steps mentioned in step 2 below.
 - *local_backup_dir* should be replaced by a directory name of the Customer choosing.
 - After successful completion of the command the backup should be available at the *local_backup_dir* folder.
- In case of any error contact [MOS](#)

2. **Note down the path of the backup folder on Management Server server.**

- a. Login as root on Management Server One-Box server
- b. Note the path of the backup to be copied by executing the command below:

```
tekelec$ ls -ld /opt/backup/backup/NSP_BACKUP*
```

It should output something like:

```
drwxrwxrwx 5 root root 4096 Sep  7 22:25
/opt/backup/backup/NSP_BACKUP_09_07_11_22_00_01
drwxrwxrwx 5 root root 4096 Sep  8 22:26
/opt/backup/backup/NSP_BACKUP_09_08_11_22_00_01
drwxrwxrwx 5 root root 4096 Sep  9 22:25
/opt/backup/backup/NSP_BACKUP_09_09_11_22_00_01
drwxrwxrwx 5 root root 4096 Sep 10 22:25
/opt/backup/backup/NSP_BACKUP_09_10_11_22_00_02
drwxrwxrwx 5 root root 4096 Sep 11 22:26
/opt/backup/backup/NSP_BACKUP_09_11_11_22_00_01
drwxrwxrwx 5 root root 4096 Sep 12 22:28
/opt/backup/backup/NSP_BACKUP_09_12_11_22_00_01
drwxrwxrwx 5 root root 4096 Sep 13 22:26
/opt/backup/backup/NSP_BACKUP_09_13_11_22_00_01
```

Where for example */opt/backup/backup/NSP_BACKUP_09_13_11_22_00_01* is the absolute path of the backup generated on 13th Sep 2011

Note: The name of folder is in format *NSP_BACKUP_mm_dd_yy_hr_ms_sc*, which denotes the date and time the backup was generated.

Note: If you want to backup the Alarm export file ,note the path of the file by using steps (c) and use in step1 (replace this path by /path/to/backup/file)

- c. Backup Alarm export file menu. As `tekelec`, run following command on Management Server (Oracle) Server

```
tekelec$ ls -lf /opt/backup/backup/ALA_*
```

It should output something like:

```
/opt/backup/backup/ALA_2011_07_01.csv  
/opt/backup/backup/ALA_2011_07_12.csv  
/opt/backup/backup/ALA_2011_07_23.csv  
/opt/backup/backup/ALA_2011_07_02.csv  
/opt/backup/backup/ALA_2011_07_13.csv  
/opt/backup/backup/ALA_2011_07_24.csv  
/opt/backup/backup/ALA_2011_07_03.csv  
/opt/backup/backup/ALA_2011_07_14.csv  
/opt/backup/backup/ALA_2011_07_25.csv
```

The File is in ALA_yyyy_mm_dd.csv format, note down the path of the file you wish to backup. For example `/opt/backup/backup/ALA_2011_07_25.csv` is the path for the Export file generated on the 25th of July 2011

EPI and Plugin Configuration for Tracing

EPI Configuration

- a) From Internet Explorer, connect to the Management Server Application GUI using the following URL: *http://nsp_ip/nsp*
Where `nsp_ip` is the IP address of the Management Server
- b) Login with user `Tklsrv`
- c) Launch ProTrace Application from Applications

Configuring Builder Time Tolerance Parameters

- a) From Application Menu, Select Configuration > EPI. The EPI Configuration screen opens.
- b) Select a builder from the pull-down menu. The screen changes to show the parameters for that builder.

EPI Configuration

xDR Builder: ▼

Builder Time Parameters			
Negative (2-90000):	<input type="text" value="3 s"/>	Positive (2-90000):	<input type="text" value="3 s"/>
Guaranteed length (-1-90000):	<input type="text" value="21600 s"/>		
EPI	Group #	Flex	Enabled
<input checked="" type="checkbox"/> A Number	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
<input checked="" type="checkbox"/> B Number	2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Group	3		<input checked="" type="checkbox"/>
<input checked="" type="checkbox"/> C Number		<input checked="" type="checkbox"/>	
<input checked="" type="checkbox"/> D Number		<input checked="" type="checkbox"/>	

▼ Group#

Apply Close

- c) Fill in the Builder Time Parameters.
The Builder Time Parameters define the time range used for searching for new xDRs. This time range is related to BEGIN TIME and END TIME of discovered xDRs and uses a Positive and a Negative value.

The ranges for both positive and negative rules are 2-90000 seconds.

The Guaranteed length parameter allows you to enhance the search period to END_TIME + Guaranteed length. This parameter is used for search optimization and corresponds to the longest call or transaction the system is guaranteed to find.

- d) Click on Apply to Save. The Builder Time Tolerance parameters would be saved successfully.

Add EPI

- a) Open the EPI Configuration UI and Select a Builder. As in Section 9.8.1.1, a) and b)
- b) Define the EPI's and EPI parameters for that builder.
EPI Name - Select any dictionary field from the drop down.

Group Number - Specify the group number in which you want to add EPI. If group number is blank then the default Group Number during Add operation would be the Max Group Number + 1 (max for the selected builder)

- c) Click Add button. The EPI will get added in the list.
 - Flex and Enabled would be checked by default
- d) Click Apply. The changes are saved.

Delete EPI

- a) Open the EPI Configuration UI and Select a Builder. As in Section 9.8.1.1, a) and b)
- b) Click on delete button corresponding to EPI which you want to delete.
- c) Click on Apply button.
- d) The new configuration would be saved.


Update EPI

- a) Open the EPI Configuration UI and Select a Builder. As in Section 9.8.1.1, a) and b)
- b) Select (or de-select), the EPI parameters for that protocol.
 - Flex - defines whether the "Flex matching" is used for given field
- c) Click Apply. The changes are saved.

Configuring Plugins

Create Plugin

- a) From Application Menu, Select Configuration > Plugins. The Plugin Configuration screen will be displayed.

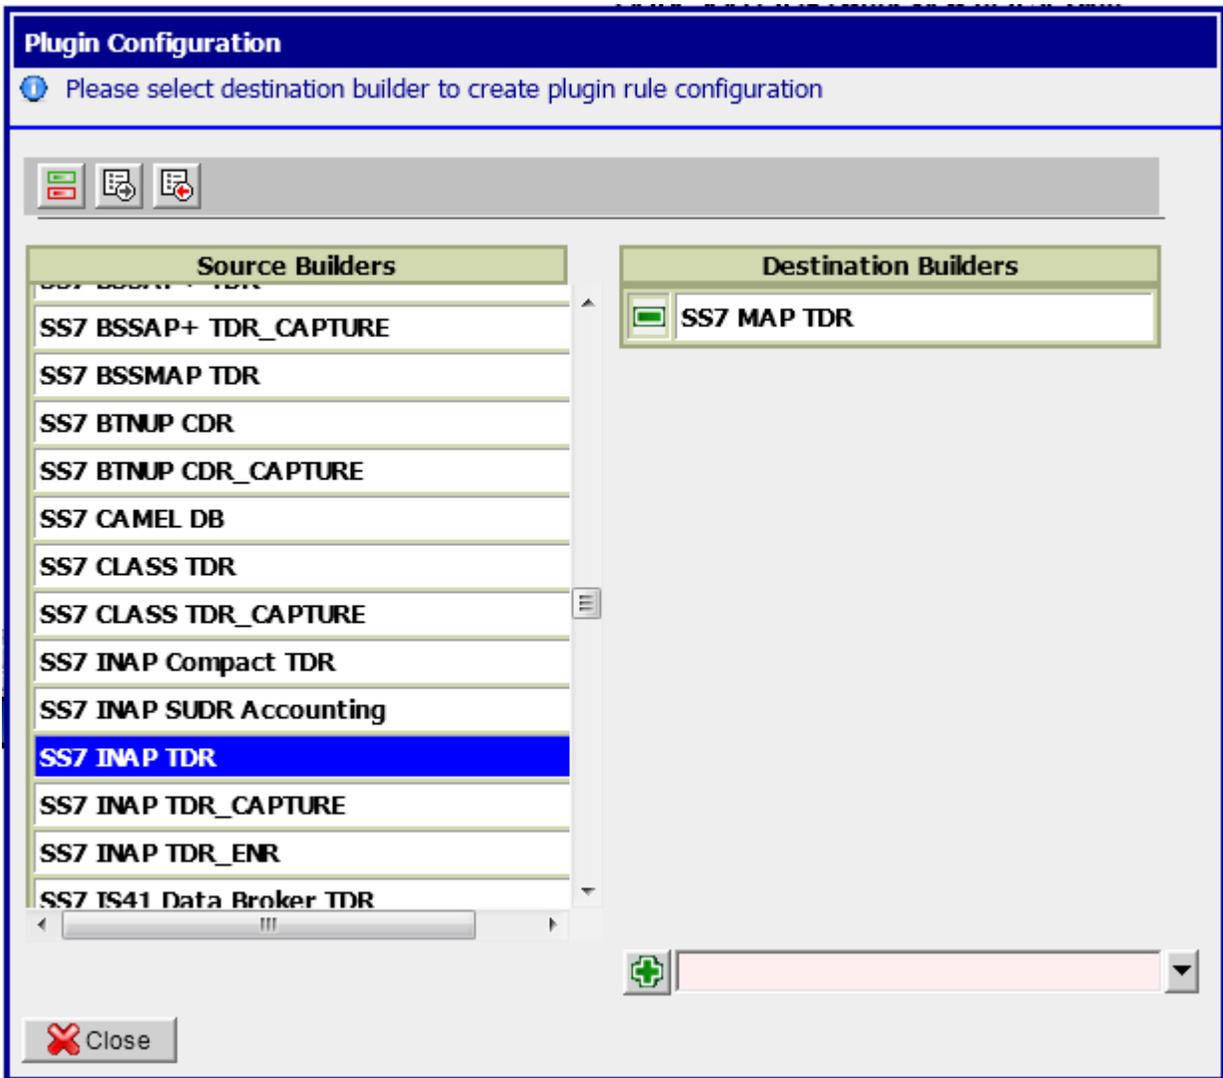

- Click on Source Builder to configure. In the right pane all builders mapped with this source builder are populated.
- To add a new plugin, select the destination builder from the available builders drop down
- Click on Add Button
- Plugin Rule Screen will open

Plugin Rule Configuration

Click ok to save auto created plugin rule configuration.

Source:SS7 ISUP ANSI CDR		Destination:SS7 ISUP ETSI CDR	
<input checked="" type="checkbox"/>	A Number		A Number
<input checked="" type="checkbox"/>	B Number		B Number

Please select a field Please select a field

Auto-sync reverse couplet

- f) Auto created Plugin Rules for the selected source and destination builders will get displayed. Auto Creation is done for the EPI's which are common to both the builders e.g. if ANumber is an EPI for both Source and Destination Builder a Plugin Rule ANumber → ANumber will be auto created in GUI.
- g) If some auto created rules are not required, user can optionally delete them
- h) If some more rules are required to be added user can optionally add more rules
- i) The Auto-sync reverse couplet Check Box if checked would create a plugin in reverse directionas well when the Plugin is saved
- j) Click on Add Button to create a Plugin Rule after selecting Source and Destination Fields
- k) Click on Ok to Save the Configuration. Plugin would be created.

Update Plugin

- a) From Application Menu, Select Configuration > Plugins. The Plugin Configuration screen will be displayed.
- b) Click on Source Builder to configure. In the right pane all builders mapped with this source builder are populated.
- c) Click on the Destination Builder to Edit Plugin
- d) Plugin Rule Screen will be opened
- e) Add/Delete required Plugin Rules
- f) Click on Ok Button.


g) Plugin would be updated with new rules

Delete Plugin

- a) From Application Menu, Select Configuration > Plugins. The Plugin Configuration screen will be displayed.
- b) Click on Source Builder to configure. In the right pane all builders mapped with this source builder are populated.
- c) Click on Delete Icon against the Destination Builder for the Plugin to be deleted
- d) Click on Ok in the Warning Dialog Box
- e) Plugin would be deleted and the list would be refreshed

Export Plugin Configuration


- a) From Application Menu, Select Configuration > Plugins. The Plugin Configuration screen will be displayed.
- b) Click on Export Button in the Toolbar
- c) Export Plugin Screen will be opened
- d) Select the Source and Destination Builders for which Plugin Configuration is to be exported. Check Source Check Box to export all plugins where this builder is a Source Builder. Check Destination Check Box to export all plugins where this builder is a Destination Builder.
- e) Click on Export
- f) Plugin Configuration for the checked source and destination builders is exported

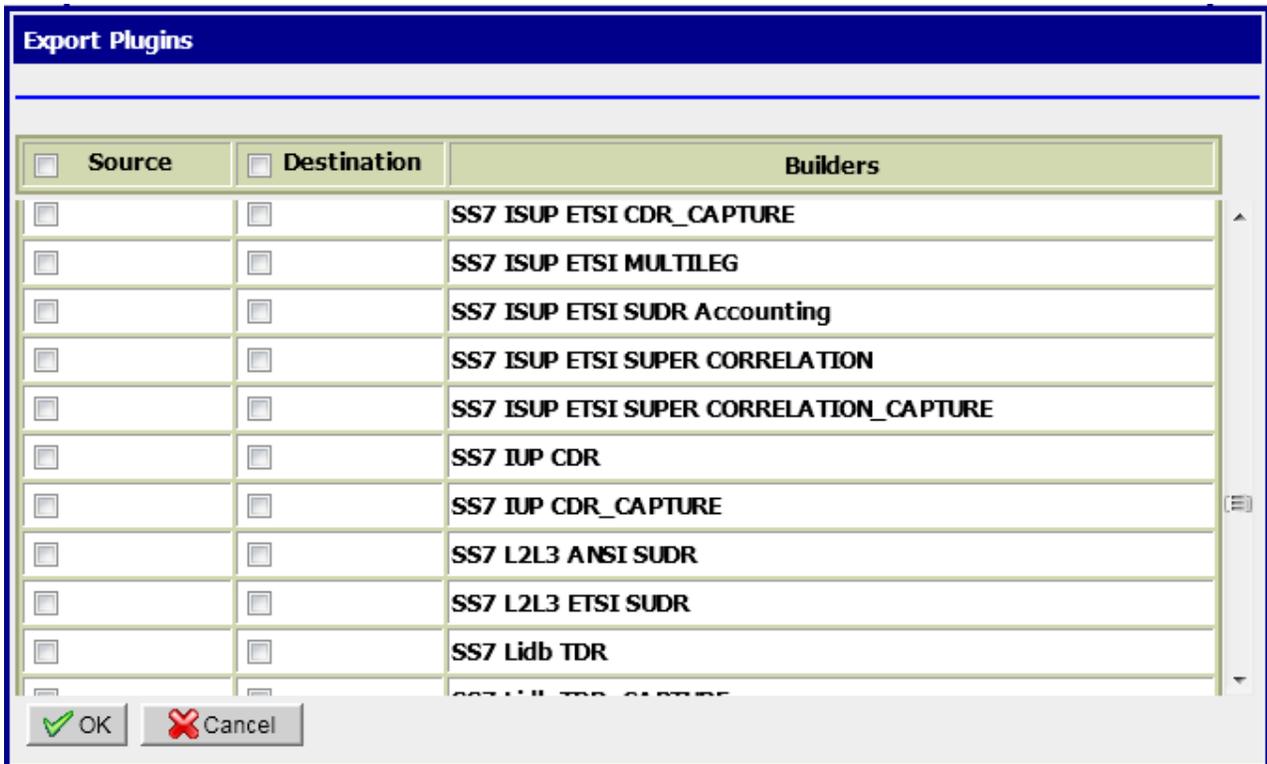

Import Plugin Configuration

Using GUI

- a) From Application Menu, Select Configuration > Plugins. The Plugin Configuration screen will be displayed.

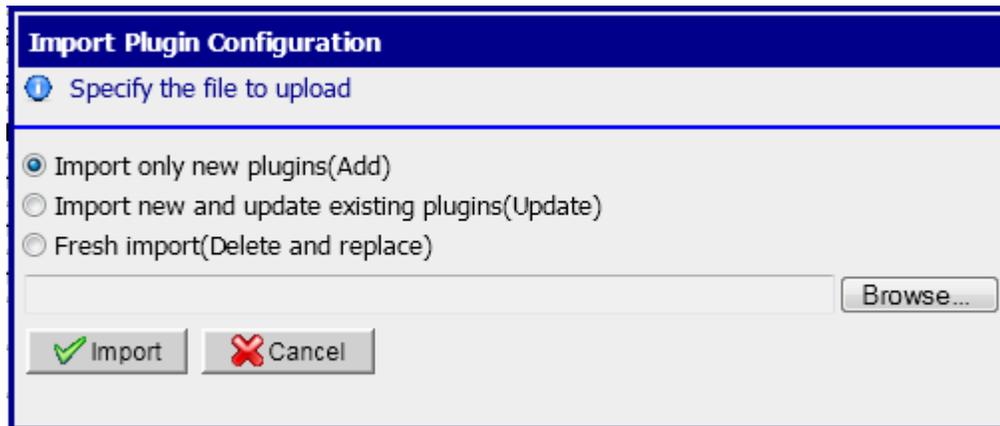

- b) Click on Import Button in the Toolbar
c) Import Plugin Configuration Screen will be opened
d) Select an Import Option to specify how the Plugin Configuration should be imported.
- Select 'Import only new plugins(Add)' Option if you want to Import only those plugins from the csv file which are not already in the system
 - Select 'Import new and update existing plugins(Update)' Option if you want to Import all Plugins which are only in csv and not in database and update the plugins which are both in csv and database. Plugins which are only in database and not in csv would not be changed.
 - Select 'Fresh Import(Delete and replace)' Option to clean the database and Import all the plugins from the csv file
- e) Browse the csv file
f) Click Import
g) Plugins would be imported according to the selected option

Using ant target

- a) Login to nsp-primary box using tekelec user

```
tekelec$ cd /opt/nsp/nsp-package/protrace
```

```
tekelec$ ant import.plugin.rules -Dparam.import.file.name=<import file path>  
-Dparam.import.type=<import type> -Dparam.create.epi=<create epi flag>
```

where,

<import file path> is the path of the CSV File to Import


<import type> is the Import Option as described in previous section,

- 0 represents Add
- 1 represents Update
- 2 represents Delete and Replace

<create epi> “Yes” if EPI Creation is required for missing EPI’s. If it is set to “NO”, Plugin Rules will not be created for missing EPI’s

Toggle View Option ‘Switch between Source and Destination View’

- a) From Application Menu, Select Configuration > Plugins. The Plugin Configuration screen will be displayed.
- b) Click on Toggle Button in the Toolbar
- c) The Plugin Display View will change from Source → Destination to Destination → Source
- d) Plugins and Plugin Rules can be Added/Deleted/Updated as explained, but the view display in this case will be Destination Builder → Source Builder for Plugins and Destination EPI → Source EPI in case of Plugin Rules. There will be no change in the software behavior except the view.

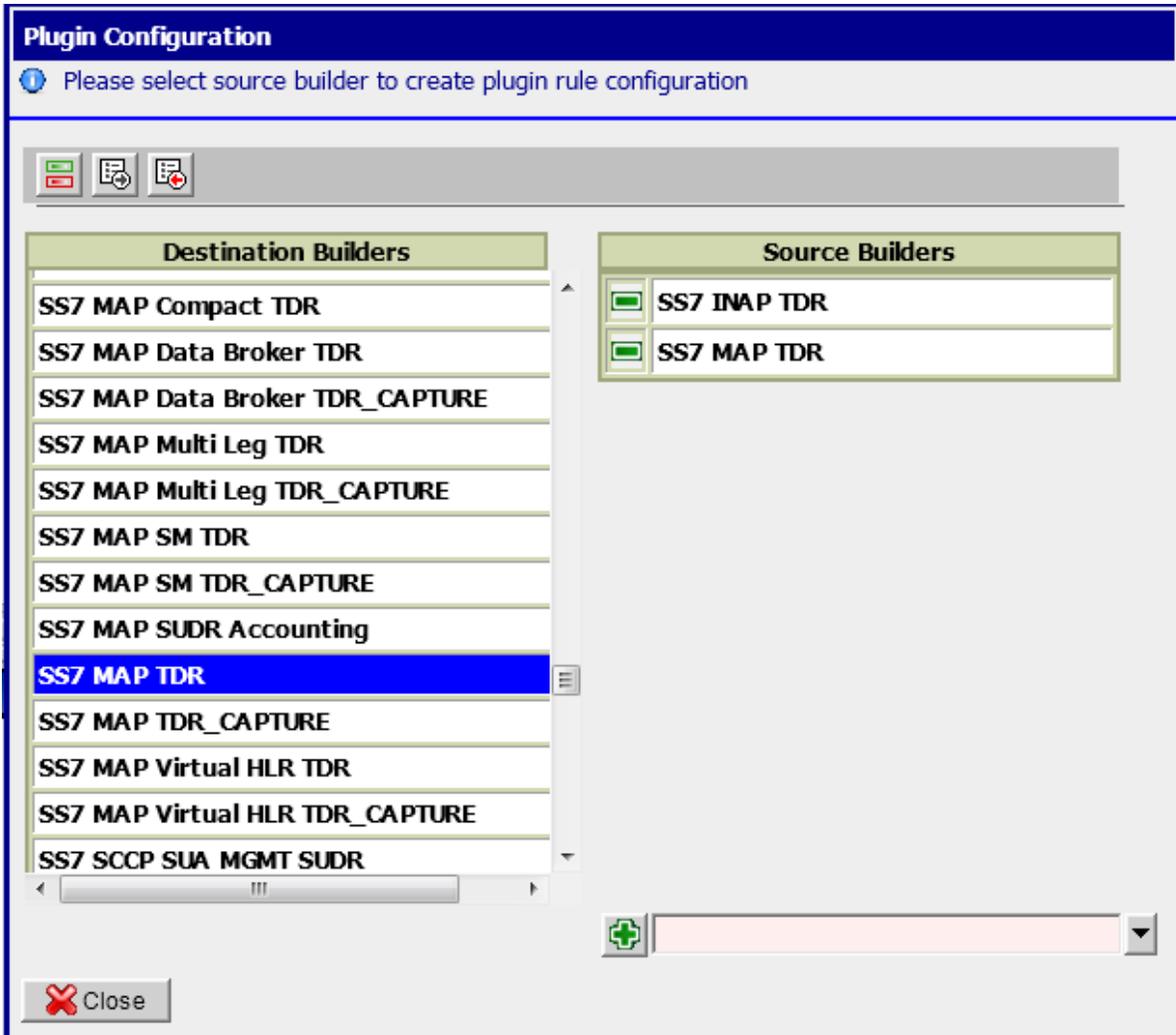

Configure Mail Server (Optional)

This procedure describes how to configure the SMTP mail server on Oracle Linux platform.

This procedure is optional; however, this option is required for Security (password initialization set to AUTOMATIC) and Forwarding (forwarding by mail filter defined)

1. Open a terminal window and log on as root on Standard Server
2. Edit hosts file and make an entry of mail.server as shown below:

```
# vi /etc/hosts
10.248.18.4      mail.server
```

Output of hosts file will be similar as shown below. Replace 10.248.18.4 with your mail server IP

```
# cat /etc/hosts
```

```
127.0.0.1 localhost
10.248.18.4 mail.server
```

Configure Authenticated Mail Server (Optional)

This procedure describes how to configure authenticated mail server. This procedure is optional.

Note: This procedure is performed after the SMTP has been configured.

When a mail server requires authentication, additional parameters must be defined in the WebLogic console.

1. Connect to the NSP application interface.
2. Log in as **weblogic** on the WebLogic Console.
3. Select **Services ► Mail Sessions ► NspMailSession**.
4. Click **Lock&Edit** and modify the JavaMail properties as needed. For example:

```
mail.transport.protocol=smtp,
mail.smtp.host=mail.server,
mail.smtp.from= noreply@tekelec.com,
mail.smtp.timeout=5 00,
mail.smtp.connectiontimeout=500
```

5. Add the following parameters:

```
mail.smtp.auth=true
mail.smtp.port=465
mail.smtp.quitwait=false
user=my_account
password=my_password
```

where *my_account* and *my_password* change according to the customer SMTP server.

6. If the SMTP over SSL is used, then add the following parameters:

```
mail.smtp.socketFactory.port=4 6 5
mail.smtp.socketFactory.class=javax.net.ssl.SSLSocketFactory
mail.smtp.socketFactory.fallback=false
```

7. Click **Save**.
8. Click **Activate Configuration**.
9. Log in as **root** on the Management server and run:

```
# service nspservice restart
```

Configure SNMP Management Server (Optional)

This procedure describes how to configure the SNMP on management server in Oracle Linux Platform.

This procedure is optional; however, this option is required for Forwarding (forwarding by SNMP filter defined)

1. Log in as root user on the Standard Server and run below mentioned script.

```
# sh /opt/nsp/scripts/procs/update_snmp_configuration.sh
```

This script will prompt for SNMP server IP. If no argument is provided in the script then by default SNMP V3 will be configured. If version V2 or v2 is passed then SNMPv2 will be configured. The script shall update the configuration in `/etc/snmp/snmpd.conf` file

- Restart the jmx agent service.

```
# service jmxsd restart
```

Note: It must be made sure that alias 'localhost' is pointing to Management Server IP address in /etc/hosts file on management server. If not then create or modify alias to point to Management Server IP address and restart jmx agent.

Modify WebLogic Administration Password (Optional)

Weblogic is installed on a Standard Server with 10.2.1 Release. The following steps must be executed to change the weblogic administration password:

- Log on to management server as as root user and execute below script

```
# /opt/nsp/scripts/procs/nsp_update_proc.sh wlsPasswordConfiguration <NEW PWD> <OLD PWD>
```

This script shall required old password and new password for weblogic. The script shall take around 45 – 60 mins for completion and restart nspservice twice.

Configure Session Timeout (Optional)

This procedure describes how to configure the session timeout, the amount of time (in minutes) that a session can remain inactive before it is invalidated and token released.

- Log in as TklcSrv on the NSP application interface.
- Select the **Security** application.
- Select **Action ► Manage Tokens**.
The Tokens window appears.
- Type the appropriate value (in minutes; must be from 15 to 480, e.g., 30) in the **Session timeout** field and click **Apply**.

Configure External LDAP (Optional)

This procedure describes how to use a customer-provided authentication based on the Lightweight Directory Access Protocol (LDAP). This procedure is optional.

- Open a terminal window and log in as root on the Management server.
- Configure the NSP database. As root, run:

```
# cd /opt/nsp/scripts/procs  
  
# sh nsp_update_procs.sh externalLDAP true
```

- From a web browser, connect to the NSP application interface. Use the following URL:

http://192.168.1.1/console

where 192.168.1.1 is the IP address of the Management server.

- Log in to the WebLogic Console as weblogic.
- Select **Security Realm ► myrealm ► Providers ► Authentication**.
- Click **Lock&Edit** and add a new LDAP Authenticator.

Provide the necessary parameters that correspond to the customer LDAP tree configuration (refer to the *WebLogic 10.3.6* documentation(E23943_01) for more information about this process).

7. Set the control flag for all of the Authentication Providers to **SUFFICIENT**.
8. Click **Save**.
9. Click **Activate Configuration**.

Configure the default settings for the new users (Optional)

This procedure describes how configure the default settings for the new users. This procedure is optional.

1. Login on the NSP GUI as user tekelec
2. Modify the user preferences according the customer requirement and especially the Time Zone.
3. Validate the settings using the button “Save as default” for each panel you modified.

Configure CSV streaming feed feature (Optional)

This procedure describes how to enable or disable the CSV streaming feed feature: this feature is subject to subscription and it is disabled after installation.

1. Open a terminal window and log in as **tekelec** on the Management server Admin Server
2. Run the appropriate commands:

- o To enable CSV streaming feed, run:

```
# cd /opt/nsp/nsp-package/framework/core
# ant enable.csv.license
```

- o To disable CSV streaming feed, run:

```
# cd /opt/nsp/nsp-package/framework/core
# ant disable.csv.license
```

Configure FSE automated update (Optional)

This procedure describes how to enable or disable the automatic update of enrichment configuration file defined or to be defined in Management system.

NSP SCAN REGURLARLY DEFINED FOLDER AND ITS SUBFOLDER (EVERY 30 MN) TO FIND FILES WITH SAME NAME AS THE THOSE DECLARED. IN THIS CASE IT LOADS FILE TO REPLACE EXSITING FSE AND REAPPLY IT AUTOMATICALLY TO SELECTED SESSION.

1. Log in as tekelec on the NSP application interface.
2. Select the **Centralized Configuration** application.
3. Select **Mediation ► Enrichment Files**.

The Enrichment Files List screen opens

4. Click on automated update button in list toolbar .

The FSE Auto Update Configuration screen opens.

5. ENTER SFTP LOCATION WHERE SYSTEM CAN FIND ENRICHMENT FSE FILE.

URL should be like sftp://<USER>:<PASSWORD>@<HOSTNAME_OR_IP>/<PATH> where

- <USER> IS USERNAME OF SFTP SERVER
- <PASSWORD> IS PASSWORD OF SFTP USER

- <HOSTNAME_OR_IP> IS ADDRESS OF SFTP SERVER
- <PATH> IS RELATIVE PATH UNDER USER HOME FOLDER IN SFTP SERVER

Note: Empty string turns off automated update

6. CLICK OK TO VALIDATE CHANGES.

Configure NSP FTP or SFTP Server

This procedure describes how to configure NSP to allow xDR export from ProTrace application to customer's external FTP or SFTP server.

1. Copy the FTP security file from the Management Server server

- a. Open a terminal window and log in as root on the Management server
- b. As root, run:


```
# cd /opt/nsp/bea/user_projects/domains/tekelec/nsp
```
- c. Copy the contents of file sftp_security.pub.

2. Update the FTP or SFTP server

- a. Log in on the FTP or SFTP server.
- b. In the file \$HOME/.ssh/authorized_keys, add the contents of file sftp_security.pub that you copied in the previous step.
- c. Make sure that the FTP or SFTP server is properly configured to allow file transfer.

Don't use root user to transfer files. tekelec and other users should be use.

By default files will be uploaded to user home. E.g- /opt/nsp for tekelec

Modify Database Password

The procedure is needed to be executed in following scenarios:

- Password Change of Management Database user
- Password Change of Data Record Storage Database user
- Adding a new Data Record Storage Server in an existing site or a new site
- After Major upgrade to 10.2, so that wallet for database user is generated and sync to various subsystem(s)

1. Log on to management 1box as root user.
2. Execute below commands

```
# cd /opt/nsp/scripts/oracle/cmd/
# sh modifyPassword.sh
```

The script will ask for below parameters:

- a. Database User Name e.g. "NSP" for management database or "IXP" for Data Record Storage Server database
- b. Service Name e.g. "NSP" for management database or "IXP" for Data Record Storage Server database

- c. Database Server IP Address : IP Address of the server where the database is hosted.
- d. Old Password of database user
- e. New Password to be set: It can be same as old but the script shall warn the user for new and old password being same.
- f. Confirmation of new password
- g. Wallet Password: Take the wallet password from database administrator
- h. Password of "sys" user : Take the sys user password from database administrator

Note: During the execution, the script will ask for the root password of mgmt. server and cfguser password of target server for synching credentials with mediation and acquisition servers discovered in the various sites managed on this management server. The password for cfguser user shall be asked only for the server(s) on which the ssh keys are not already shared between tekelec and cfguser.

Sync Database Credentials

The procedure is needed to be executed in following scenarios:

- A new server is added into an Acquisition Subsystem
- A new server is added into a Mediation Subsystem

1. Log on to management server as root user.
2. Execute below commands

```
# su - tekelec
# cd /opt/nsp/scripts/oracle/cmd/
# sh syncFiles.sh
    Or
# sh syncFiles.sh <IP1>
    Or
# sh syncFiles.sh <IP1> <IP2> ..... <IPn>
```

The script if not provided any argument shall perform the sync of credentials to all the server discovered in various sites managed by the management server.

If the script is executed with one or more IP address (separated by space), then credentials shall be synced to all the IP address passed as arguments.

Note: During the execution, the script will ask for the root password of mgmt. server and cfguser password of target server for synching credentials with mediation and acquisition servers discovered in the various sites managed on this management server. The password for cfguser user shall be asked only for the server(s) on which the ssh keys are not already shared between tekelec and cfguser.

Modify Wallet Password

The procedure should be executed in case user want to modify the password for wallet.

1. Log on to management server as root user.
2. Execute below commands

```
# cd /opt/nsp/scripts/oracle/cmd
# ./modifyPassword.sh WALLET
```

The script shall prompt for the following:

- The old password: the existing wallet password.
- The new password: the new wallet password.

Note: During the execution, the script will ask for the root password of management server and cfguser password of target server for synching credentials with mediation and acquisition servers discovered in the various sites managed on this management server. The password for cfguser user shall be asked only for the server(s) on which the ssh keys are not already shared between tekelec and cfguser.

Chapter 8: Acquisition Maintenance Procedures

Procedure to enable/disable timestamp resolution to nanoseconds

This procedure describes how to enable/disable the timestamp resolution to ns on transport for IPRaw packet between Probed and Mediation.

By default, this feature is enabled and the default timestamp resolution is the nanosecond.

This feature can be activated separately for MFP or DTS transport protocol by the parameter 'TlvDsMask' inside the 'LongParam' table:

```
Yes|TlvDsMask|2|Set the XMF output interface mode (1-TLV_MFP_IP, 2-TLV_DTS_IP, 3-Both)
```

After modification of this parameter, the Probed must be restarted.

Note: A clobber on the Acquisition server will reset the default value for this feature which is "2-TLV_DTS_IP" in this feature.

Falco Firmware upgrade procedure

Use the MOS Note [How to Update Falco Firmware](#) Doc Id 2026088.1, at the end of the procedure, displayed version must be:

```
Version: 1.00i
FPGA V5: C3090111
          0F120005
FPGA V4: C1072711
          0F121E04
```

Key exchange procedure with Neptune probe

For Neptune EPC, the online user manual should be used for key sharing for accessing using client browser. There is no need for keysharing with management server, as management server no more provide access to Neptune GUI.

Add New Server in the Integrated Acquisition sub-system

The procedure should be executed for the Integrated Acquisition sub-system in case there is a need to add an additional server in the Integrated Acquisition sub-system. Following steps must be executed for adding the server in the already installed Integrated Acquisition sub-system:

1. Install Integrated Acquisition server
 - a. **Install** the additional Integrated Acquisition server using the procedures mentioned in Chapter 6 in [PIC 10.2.1 Installation document](#) .Only procedures till section "Install Acquisition Server Application" should be executed.

Note: Use the bulkconfig file already present on the already installed servers and add the entry for the additional Integrated Acquisition server in the bulkconfig file. Copied the modified bulkconfig file to all the other Integrated Acquisition servers.

Run bulkconfig script as root user on all subsystem servers:

```
# /opt/TKLCmf/bin/bulkConf.pl
```

2. Discover the server on Management Server
 - a. **Log in to the Management Server application**
 - i. Log in as tekelec to the Management Server application interface using the Management Server IP address.
 - ii. Click **Centralized configuration**. The Management Server application launches.
3. Discover the server on Management Server
 - a. **Modify Integrated Acquisition site on Management Server**
 - i. Select **Equipment Registry ► Sites**
 - ii. Navigate to **XMF**
 - iii. Right click in the requested subsystem
 - iv. Select **Add** from the popup menu.
 - v. Fill in the **Host IP Address** field with the IP address of the server you want to add.
 - vi. Click the **Create** button.
 - vii. Return to the **Equipment registry**.
Click on the subsystem to display the list of servers.
 - viii. Choose the newly added server and press **Discover applications**.
4. **Sync Database Credentials**
Execute procedure described in section 7.17 **Sync Database Credentials**
5. Apply Configuration on Integrated Acquisition
 - a. **Apply Changes on Integrated Acquisition site on Management Server**
 - i. Navigate to the Mediation view.
 - ii. Navigate to Sites
 - iii. Open XMF and right-click on the subsystem.
 - iv. Select **Apply changes...** from the popup menu.
 - v. Click on the **Next** button
 - vi. Click on the **Apply Changes** button.
 - vii. Wait until changes are applied.
 - viii. Verify that result page does not contain any errors.

Change the hostname of the Probed Acquisition Server

The procedure should be executed for the Probed Acquisition server in case there is a need to change the hostname of the server. Following steps must be executed for changing the hostname of the server:

1. Update “/root/bulkconfig” file with new hostname
2. Run bulkconfig script as root user:

```
# /opt/TKLCmf/bin/bulkConf.pl
```



Warning: On changing the hostname of the server, the bulkConf.pl script automatically clobber the IDB of the probed acquisition server. This is done to clean the configuration of the previous hostname. The subsequent Apply Change will restore the configuration on the server.

3. Reboot the server
4. Sync the new hostname on the Management Server ProAdmin.
 - a. Login to Management Server GUI as privileged user and open Centralized Configuration application.
 - b. To synchronize, go to Equipment Registry->sites->XMF and select select XMF subsystem to update. A table with the list of all servers is displayed (see picture below)
 - c. Select the xMF server and click on Discover Applications.

#	Host Name	Discover applications	Description	Frame	Position	IP Address
1	pmf-gen810g-0a			0	1	10.31.2.66

d. Select the xMF server and click on Synchronize

#	Name	Application Instances	Virtual IP Address	Actions
1	XMF810G:XMF	pmf-gen810g-0a	10.31.2.66	Synchronize

5. Apply Change
 - a. To Apply Changes for each subsystem go to Acquisition ► Sites ► XMF.
 - b. Right click on subsystem and click on Apply Changes option on menu.

Remove Server from the Integrated Acquisition sub-system

The procedure should be executed for the Integrated Acquisition sub-system in case there is a need to remove server from the Integrated Acquisition sub-system. Following steps must be executed for removing the server from the already installed Integrated Acquisition sub-system:

1. Remove the server from Acquisition Perspective on Management Server
 - a. **Log in to the Management Server application**
 - i. Log in as tekelec to the Management Server application interface using the Management Server IP address.
 - ii. Click **Centralized configuration**. The Management Server application launches.
 - iii. Go to Acquisition->Site->xMF (sub-system)->Servers
 - iv. Select the server and click on delete icon
2. Remove the server from Equipment Registry on Management Server
 - a. **Modify Integrated Acquisition site on Management Server**
 - i. Select **Equipment Registry ► Sites**
 - ii. Navigate to **XMF**
 - iii. Click in the requested subsystem
 - iv. Select the Server on the right screen
 - v. Click the **Delete** icon.
 - vi. Return to the **Equipment registry**.
3. Modify the bulkconfig file on all the existing servers in the sub-system.
 - a. **As root, update "/root/bulkconfig" file to remove the server entry.**
4. Execute the bulkconf.pl script on each existing server in the sub-system
 - a. As root user, run


```
# /opt/TKLCmf/bin/bulkConf.pl
```
5. Apply Configuration on Integrated Acquisition Subsystem
 - a. **Apply Changes on Integrated Acquisition site on Management Server**
 - i. Navigate to the Mediation view.
 - ii. Navigate to Sites
 - iii. Open XMF and right-click on the subsystem.
 - iv. Select Apply changes... from the popup menu.
 - v. Click on the Next button
 - vi. Click on the Apply Changes button.
 - vii. Wait until changes are applied.
 - viii. Verify that result page does not contain any errors.

Chapter 9: Mediation Maintenance Procedures

Note: It may be require to give root ssh access before executing many procedures. Please give the access and then revoke it after completing the procedures, as mentioned below

```
# /usr/TKLC/plat/sbin/rootSshLogin -permit
# /usr/TKLC/plat/sbin/rootSshLogin -revoke
```

Offload DFPs from the Mediation Server

This procedure describes how to offload the dataflow processing from the Mediation server. The procedure can be executed during the maintenance procedure or when the server is under heavy load. The capacity management session should be used to find the load on the system and accordingly the decision to offload DFPs should be made.

1. Redistribute processes

- a. Open a web browser and log in to Management Server application interface.
- b. Click on **Centralized Configuration**.
- c. Navigate to **Mediation**. Select the Mediation subsystem and navigate to **Mediation subsystem > Distribution**.
- d. From the displayed table go to the **Server** column and redistribute processes from the offload server to the remaining servers.
- e. Right click on the Mediation subsystem in the **Mediation** menu and press **Apply changes**.

2. Redistribute DataFeed

- a. Navigate to Management Server home page
- b. Click on **DataFeed**.
- c. Open the **DataFeeds** tree and select **xDR/KPI exports**.
- d. Deactivate all the processes that are assigned to the particular server by clicking on **Deactivate**.
- e. Wait until feed is deactivated.
- f. If possible click on **Edit** button and redistribute such processes on the other servers by choosing new **Host name** and clicking on **Finish**.
- g. If the **Edit** button won't be visible (in the case that feed status will be **Unknown** or **Recovering**) click on **Copy feed** and create a new feed with the same behavior on the new server. As soon as possible remove the old feed by **Delete** button.

3. Cancel KPI historical tasks

- a. Go to the Management Server home page

- b. Navigate to the **ProTraq** application in the Management Server.
- c. Open **Historical task** tab.
- d. Cancel all the tasks that are assigned to the particular server.

4. Reassign external connections

Note: The steps before take care about the stream tracking and if a producer dataflow processing has moved to another server, the consumer dataflow processing will finish processing the buffered data on the first server and automatically reconnect on the newly assigned server. But this automatic procedure does not apply to external connections.

- a. Acquisition probe (Integrated Acquisition, Probed, MSW) sending data to a stream on this machine. In such a case it is required to reconfigure also this system in order to reconnect to the replacement (in general the spare) server
- b. Other Mediation subsystem processing output data from this subsystem. This situation can be automatically managed if you configured two source IP addresses in the external Stream the consumer subsystem will find a new connection point to the data. If you did not assign a second IP address, you must edit the stream configuration and change the hostname or IP address of this stream accordingly.
- c. Queries. If the relevant server was used as the server answering to the queries, the subsequent connections will fail until this server has finished its maintenance. If this period will be long, you must configure a new address for queries

Configure PDU Storage Parameters

- a) Log into any server from Mediation subsystem
- b) As cfguser run:

```
$ iqt -phz -f_name -f_role DaqServer
```

Example output:

```
ixp7000-1a StbMaster
```

```
ixp7000-1b ActMaster
```

```
ixp7000-1c Slave
```

The output will show you information about ActMaster and StbMaster of the subsystem

- c) On ActMaster server, type:

```
$ ivi SubsystemTaskParam
```

The content of the table will be displayed, for example:

```
#!/bin/sh
```

```
iloadd -ha -xU -fID -fParamName -fParamValue SubsystemTaskParam \
```

```
<<'!!!!'
```

```
1 | AlarmClear | 1500
```

```
2 | AlarmFail | 1500
```

```
3 | MaxFileAge | 864000
4 | MaxPercentUsage | 90
5 | ExcludePath | write.enable
6 | Path | /opt/TKLCixp/pdu
7 | Interval | 5
8 | Interval | 300
9 | Path | /es
10 | ExcludePath | statistics
11 | LoginName | ixp
13 | AlarmFail | 100
14 | AlarmClear | 100
15 | OracleMaxPurgeTime | 900
16 | IdbPurgeTime | 21600
17 | TaskPurgeTime | 604800
18 | ExcludePath | run
19 | DatabaseName | ixp0008-1a_DWH
20 | HostName | ixp0008-1a
21 | Password | IXP
!!!!
```

Change the value of parameter **MaxFileAge** (864000 seconds, in this example).

Don't forget to save the change when quitting the editor.

- d) The table SubsystemTaskParam will be automatically replicated on all other servers of the subsystem. But you need to kill the process IxpPurge on each server of the subsystem so that the change is taken into account by the software.

```
$ pm.kill IxpPurge
```

Using command pm.getprocs, check that the process is actually restarted.

Enable/disable Write Access to the PDU Mounts

This procedure describes how to enable/disable write access to a specific PDU mounts. This procedure is applicable to Mediation PDU storage servers.

Enable/disable Write Access to the PDU Mounts for TPD based storage

1. To disable writing

- a) Open a terminal window and log in on the Mediation PDU Storage server as root. Enter a platcfg menu. As root run:

```
# su - platcfg
```

- b) Navigate to **IXP Configuration > PDU Storage** and press **Edit**
- c) Mark both PDU mounts to **no** to disable writing.
Note: After this step the IxpBuild processes will not be able to write to its PDU mounts from a specific PDU Storage Server. But mount point as such will still be accessible.

2. To enable writing

- a) Open a terminal window and log in on the Mediation PDU Storage server as root. Enter a platcfg menu. As root run:

```
# su - platcfg
```

- b) Navigate to **IXP Configuration > PDU Storage** and press **Edit**
- c) Mark both PDU mounts to **yes** to enable writing.
Note: After this step the IxpBuild processes will be able to write to its PDU mounts from a specific PDU Storage Server.

Enable/disable Write Access to the PDU Mounts for non TPD based storage

1. To enable writing

For ZFS and Standard storage following should be done to enable Write acces for PDU mounts.

As root user on mediation server , change directory to PDU mount directory

```
# touch write.enable
```

2. To disable writing

For ZFS and Standard storage following should be done to disable Write acces for PDU mounts.

As root user on mediation server , change directory to PDU mount directory

```
# rm write.enable
```

Set Behavior Mode for Data Record Storage Server

This procedure describes how to set the behavior mode for a specific Data Record Storage Server that is part of the Dara Record storage pool.



In case of single Data Record Storage server in a storage pool, the following steps will not avoid data loss as there is no other server to store the xDR.

In this case you may edit the DFP store and select an other storage pool..

- a. Open a web browser and log in to Management Server application interface.
- b. Click on **Centralized Configuration**.
- c. Navigate to **Mediation > Sites > IXP subsystem**
- d. Click on **Storage**.
- e. In the list in the right choose one of the 3 possible states: **ACTIVE**,

MAINTENANCE, QUERY ONLY.

- f. Right click on the Mediation subsystem and press **Apply Changes**.

Re-Sync the Mediation Configuration

This procedure describes how to synchronize the Mediation configuration from the Management Server. This procedure is applicable to the Mediation ActMaster server.

1. Drop synchronization history on the Mediation ActMaster server

Note: This step will drop the synchronization history and such during the next Apply Changes the whole configuration will be synchronized from Management Server to Mediation subsystem.

- a. Open a terminal window and log in on the Mediation ActMaster server as `cfguser`.
- b. As `cfguser` run:
- c.

```
$ /opt/TKLCixputils/bin/misc_force_sync.sh --all
```

2. Run Apply Changes to Mediation subsystem from Management Server

- a. Open a web browser and log in to Management Server application interface.
- b. Click on **Centralized Configuration**.
- c. Navigate to the **Mediation** view.
- d. Navigate to **Sites**
- e. Open **IXP** and right-click on the subsystem.
- f. Select **Apply changes...** from the popup menu.
- g. Click on the **Next** button
- h. Click on the **Apply Changes** button.
- i. Wait until changes are applied.
- j. Verify that result page does not contain any errors.

Add Server to the Mediation Subsystem

This procedure describes how to add a Base Server to the Mediation subsystem. This procedure is a general overview of a complex procedure.

Prerequisite: This procedure assumes that the Mediation server has been already installed accordingly to Manufacturing Installation document and such server has not been integrated to any other Mediation subsystem yet. This procedure describes the post-manufacturing integration to Mediation Subsystem.

1. Integration with the Mediation subsystem

Note: This step assume user is familiar with Mediation bulkconfig file and its usage.

- a) Open a terminal window and log in on Mediation server you are about to add to the Mediation subsystem as `root`.

- b) Update the `/root/bulkconfig` file.

Note: The easiest way how to update the bulkconfig file is to copy the bulkconfig file from any server of the target Mediation subsystem. Store this file to new Mediation server. Then add the host line with newly installed Mediation server to the bulkconfig file. Check that the bulkconfig file on the additional Mediation server now contains overall subsystem configuration information and also make sure that the bulkconfig files contains records for all servers in the subsystem including the newly added one.

- c) Once your bulkconfig is valid run automated integration script:
Note: This step must be run on additional Mediation server, the one where you have updated the bulkconfig file in previous step.

Run the following steps:

1. As root run:

```
# bc_customer_integration.sh --local
```

2. Once finished server will reboot.

3. Log in back to the same newly added server. As root run:

```
# /usr/TKLC/plat/sbin/rootSshLogin -permit
```

```
# bc_adjust_subsystem.sh
```

- d) Run analysis to see if the subsystem has been adjusted properly. As root run:

```
# bc_diag_bulkconfig.sh -a
```

2. Install the xDR Builder package

An xDR builder package must be associated to the particular subsystem before running this procedure. All servers in the subsystem must have the same xDR builders' package.

As cfguser run:

```
$ server_builder_installer.sh -f xdr_builder_rpm_filename
```

Where *xdr_builder_rpm_filename* is the name of the builder *.rpm package already uploaded in the Management Server and associated to this subsystem.

3. Add server to existing Mediation subsystem

- a) Open a web browser and log in to Management Server application interface.
- b) Click on **Centralized Configuration**
- c) Navigate to **Sites**
- d) Navigate to **IXP**
- e) Right click in the requested subsystem
- f) Select **Add** from the popup menu.
- g) Fill in the **Host IP Address** field with the IP address of the server you want to add.
- h) Click the **Create** button.
- i) Return to the **Equipment registry**.

Click on the subsystem to display the list of servers.

- j) Choose the newly added server and press **Discover applications**.

4. Sync Database Credentials

Execute procedure **Sync Database Credentials** of chapter 7

5. Apply configuration to the Mediation subsystem

- a) Navigate to the **Mediation** view.
- b) Navigate to **Sites**
- c) Open **IXP** and right-click on the subsystem.
- d) Select **Apply changes...** from the popup menu.

- e) Click on the **Next** button
- f) Click on the **Apply Changes** button.
- g) Wait until changes are applied.
- h) Verify that result page does not contain any errors.

6. Verify license installation

- a) Log in as cfguser on the Mediation Active Master server.
- b) Run:


```
$ IxpCheckLicense
```
- c) Verify the output.
The information about the license should state that license is valid and that license type is not STARTUP. If the license type is STARTUP , refer to [Appendix A: My Oracle Support](#)

Add Mediation Server to the Mediation Subsystem in Management/CCM

This procedure describes how to add the Mediation server to the Mediation subsystem that is already configured in CCM. This procedure is applicable once per Mediation server. Run this procedure in Management Server GUI.

1. Add server to existing Mediation subsystem

- a) Open a web browser and log in to Management Server application interface.
- b) Click on **Centralized Configuration**
- c) Navigate to **Sites**
- d) Navigate to **IXP**
- e) Right click in the requested subsystem
- f) Select **Add** from the popup menu.
- g) Fill in the Host IP Address field with the IP address of the server you want to add.
- h) Click the Create button.
- i) Return to the **Equipment registry**.
Click on the subsystem to display the list of servers.
- j) Choose the newly added server and press **Discover applications**.

2. Sync Database Credentials

- 3. Execute procedure **Sync Database Credentials** of chapter 7

4. Apply configuration to the Mediation subsystem

- a) Navigate to the **Mediation** view.
- b) Navigate to **Sites**
- c) Open **IXP** and right-click on the subsystem.
- d) Select **Apply changes...** from the popup menu.
- e) Click on the **Next** button
- f) Click on the **Apply Changes** button.

- g) Wait until changes are applied.
- h) Verify that result page does not contain any errors.

Remove Server from the Mediation Subsystem

This procedure describes how to remove a server from an Mediation subsystem.

Note: Remove one server after the other; execute the full procedure for each server to remove.

1. Offload the Mediation server

Offload DFPs from the server you are about to remove from the subsystem. Refer to [9.1 Offload DFPs from the Mediation Server](#)

2. Shutdown the Mediation server you want to remove from the Mediation subsystem

Open a terminal window and log in to the Mediation server you want to remove from the Mediation subsystem.

Shutdown this server. As root run:

```
# poweroff
```

3. Remove the xDR builders from the Mediation subsystem in Management

Note: this step has to be run for the **last server only** of the Mediation subsystem.

- a) Open a web browser and log in Management Server application interface.
- b) Click on **Centralized Configuration**.
- c) Navigate to **Mediation > Sites > IXP Site > IXP > IXP subsystem > xDR Builders**.
- d) In the toolbar, click the garbage can icon (Delete All) to delete all the xDR builders associated to this Mediation subsystem.
- e) Confirm the deletion by clicking **OK**.

4. Remove server from the Mediation subsystem in Management Server

- a) Open a web browser and log in Management Server application interface.
- b) Click on **Centralized Configuration**.
- c) Navigate to **Mediation > Sites > IXP Site > IXP > IXP subsystem > Servers**.
- d) In the list of the servers displayed on the right side mark the server that you want to remove.
- e) Click on **Delete**.
- f) Right click on Mediation subsystem and press **Apply changes**.
- g) Wait until system reconfiguration.

This will remove the Mediation server from the Mediation subsystem.

5. Remove the server from bulkconfig and adjust the subsystem accordingly

Note: Run this procedure from ANY Mediation server in the Mediation subsystem BUT NOT from a server you are about to remove.

- a) Open a terminal window and log in to any remaining Mediation server in the subsystem as root.

b) From the bulkconfig file remove host line with the Mediation server you want to remove from the Mediation subsystem.

c) As root run:

```
# /usr/TKLC/plat/sbin/rootSshLogin -permit  
  
# bc_adjust_subsystem.sh
```

d) Run analysis to see if the subsystem has been adjusted properly. As root run:

```
# bc_diag_bulkconfig -a
```

Note: Clobber the server using “prod.start -c” which was removed. It will be necessary to clobber the server before it can be reused in any other sub-system.

Change Mediation network interface type to Bonding

This section describes the Mediation type network interface change procedure. This type interface change procedure is applicable to already configured system that is in running state.

Note: In case of bonding, if any of the interface is down e.g. eth01 or eth02, then no alarm will be raised by the platform or the application.

1. **Delete** old interface eth0X

a. To delete the default route, as root, run:

```
netAdm delete --route=default --device=eth01 --gateway=<gateway-ip>
```

b. To delete the Vlan interface, as root, run:

```
netAdm set --device=eth01 --address=<ip-address> --deleteAddr
```

2. **Configure** the bonding interface

a. To check if bonding interface exist, as root, run:

```
netAdm query --device=bond0
```

b. If bonding interface exist, as root, run:

```
netAdm set --device=bond0 --bootproto=none --type=Bonding --addr=<ip-address>  
--netmask=<network-mask> --onboot=yes --mode=active-backup --miimon=100  
--bondInterfaces=eth01,eth02
```

If bonding interface not exist, as root, run:

```
netAdm add --device=bond0 --bootproto=none --type=Bonding --addr=<ip-address>  
--netmask=<network-mask> --onboot=yes --mode=active-backup --miimon=100  
--bondInterfaces=eth01,eth02
```

c. To create the default route, as root, run:

```
netAdm add --route=default --device=bond0 --gateway=<gateway-ip>
```

d. Restart the network, as root, run:

```
service network restart
```

3. In the **bulkconfig** file, be sure to use the bond0 interface (and not the usual ethxx interface)

- Login to the iLO as root of any IXP server in the subsystem you are about to reconfigure
- Update the /root/bulkconfig file with the new interface

4. Run **Apply change** procedure
 - a. Run the IXP subsystem customer integration procedure as root:

```
# /usr/TKLC/plat/sbin/rootSshLogin --permit  
  
# bc_customer_integration.sh
```

Installation of External Datawarehouse

Refer to PIC Data WareHouse Server (DWS) on Third-Party Server Installation Guide [KM_2028670.1](#)

Setup NFS Mount for DataFeed Application on Customer Provided Server

Setup NFS Mount for DataFeed Application on TPD based platform

This procedure describes the steps how to setup the nfs mount for Data Export on the customer provided server.

In some cases, the customer did not get an Export Server added to the Mediation subsystem, so the traditional method is still used. UID for cfguser is 2000. The customer must change the UID on their server to allow cfguser to mount and access the filesystem.

Note: UNIX like system is expected to be installed on customer provided server.

1. **Create cfguser user and cfg group**

Note: Run this step on customer provided server. No exact steps are provided. This differs from system to system.

- UID for cfguser must be 2000
- GID for cfg must be 2000

2. **Create export directories**

Note: Run this step on customer provided server.

Open a terminal window and log in as cfguser. As cfguser run:

```
$ mkdir -p /es/es_1  
  
$ mkdir -p /es/es_2  
  
$ chmod -R 750 /es
```

Make sure that the owner of these directories is cfguser and group cfg.

3. **Update the /etc/exports file**

Note: Run this step on customer provided server.

Add the following lines into the /etc/exports file

```
/es ixp????-??(rw,async,no_root_squash,anonuid=-1)
```

```
/es/es_1 ixp????-??(rw,async,no_root_squash,nohide,anonuid=-1)
```

```
/es/es_2 ixp????-??(rw,async,no_root_squash,nohide,anonuid=-1)
```

4. Restart the NFS service

Note: Run this step on customer provided server. This step might be platform dependant. Check before executing this step.

As root run:

```
# service nfs stop  
  
# service portmap restart  
  
# service nfs start
```

5. Update the /etc/hosts

Note: Run this step on customer provided server.

Add all the Mediations that will use this server as an export target into the /etc/hosts file. Only those machines that will be present in /etc/hosts file and will pass the ixp hostname mask will be able to use this server as an export server.

6. Configure the DataFeed Application (Management Server)

Note: Run this step in DataFeed application (under Management Server).

Follow with standard DataFeed configuration. Set export server IP to the IP of the machine you just configured, set remote filesystem to /es/es_1 or /es/es_2 and set remote directory to the desired directory name that will be created under /es/es_?/.

Setup NFS Mount for DataFeed Application on Standard Platform

The procedure to install and configure the NFS mounts for data export is similar to the one mentioned below, however the mount points should be created with below information

As cfguser,

```
$ mkdir -p /es/es_1  
  
$ mkdir -p /es/es_2  
  
$ chmod -R 750 /es
```

Refer to PIC **Packet Data Unit Storage (PDU)** on Third-Party Server Installation Guide [KM_2034894.1](#)

Configure the DataFeed Application (Management Server)

Note: Run this step in DataFeed application (under Management Server).

Follow with standard DataFeed configuration. Set export server IP to the IP of the machine you just configured, set remote filesystem to /es/es_1 or /es/es_2 and set remote directory to the

desired directory name that will be created under /es/es_?/.

External Storage Configuration using NFS on ODA

The external storage can be configured on the ODA for the PDU storage using NFSv4 on the Mediation Servers instead of using a dedicated server.

Procedure to configure NFS mount point on ODA Oracle Server:

1. Create PDU storage directories as root user

```
# cd /cloudfs
# mkdir -p export/pdu_1
# chmod 766 /cloudfs/export/pdu_1
```

2. Update the /etc/exports file as root user

Add the following lines into the /etc/exports file

```
/cloudfs/export/pdu_1 ixp????-??(rw,async,no_root_squash,anonuid=-1)
```

3. Update the /etc/hosts

Note: Run this step on ODA oracle server.

Add all the mediation servers that will use this server as external PDU storage target into the /etc/hosts file. Only those machines that will be present in /etc/hosts file and will pass the ixp hostname mask will be able to use this server as an external PDU storage server.

As root, edit the /etc/hosts file using vi editor and add the following line for all the mediation servers. Save the file after modification.

```
<ip_address>          <mediation_server_hostname>
For example
10.31.2.61             ixp9010-1a
10.31.2.62             ixp9010-1b
```

4. Restart the NFS service

As root run:

```
# service nfs stop
# service portmap restart
# service nfs start
```

5. Update bulkconfig

Edit the bulkconfig file, add the lines starting with the pdu keyword, followed by the IP of the PDU storage server. As root, adjust the subsystem PDU settings with the following command:

```
# bc_adjust_subsystem.sh
```

Data Record Storage installation on HP

The procedure given below is applicable to both RMS and blades for DRS installed before PIC 10.2.0.

Refer and follow the flow defined in Section 2.7 “DWS DL360/BL460 Gen8” in [PIC 10.1 INSTALL DOCUMENT](#) Doc ID E53508 for the Data Record Storage Server installation on Blades and RMS HP hardware. The software release of PIC 10.1 must be used for this installation.

Data Record Storage Post-Integration Configuration

The procedure is applicable for both ODA as well as HP based Data Record Storage Server.

Activate Session Compression

This procedure describes how to activate/deactivate compression for a particular Oracle session.

Before performing this procedure be aware of the following facts:

- Activated compression will have negative influence on storage speed rate.
- Activated compression will have negative influence on ProTrace queries speed rate.
- Activated compression will have positive influence on storage size.
- All current benchmark tests have been tested with deactivated compression.

Note: Execute this procedure for all Data Record Storage Server servers in the Storage Pool where the session is located, from any remote mediation base server.

1. Login to the any mediation server

- a) Open a terminal window and log in to the mediation server as cfguser.
- b) Navigate to /opt/TKLCixp/prod/db/tuning/cmd directory. As cfguser run:

```
$ cd /opt/TKLCixp/prod/db/tuning/cmd
```

2. How to activate the compression

To activate compression for particular session as cfguser run:

```
$ ./TuningPackage.sh ixp/ixp@<IP>/ixp -c <session>
```

where <IP> is the iP of Data Record Storage server and <session> is the name of particular session.

3. How to deactivate the compression

To deactivate compression for particular session as cfguser run:

```
$ ./TuningPackage.sh ixp/ixp@<IP>/ixp -x session
```

where <IP> is the iP of Data Record Storage server and <session> is the name of particular session.

4. Verify the settings

Verify the session list where the session compression is activated. As cfguser run:

```
$ ./TuningPackage.sh ixp/ixp@<IP>/ixp -l
```

Where <IP> is the iP of Data Record Storage server.

All session with activated compression will be listed in the command output.

Change Default Passwords of Oracle Accounts (optional)

Refer [Modify Database Password](#)

Chapter 10: External Software Configuration

Java Runtime settings

Refer to [PIC 10.2.1 Quick Start Guide](#), E77482-01

IE Browser Settings

Refer to [PIC 10.2.1 Quick Start Guide](#), E77482-01

Chapter 11: Knowledge Base Procedures

How to mount the ISO file via iLO

Note: For latest procedure to mount ISO corresponding to iLO4, please refer Doc Id E53486 [Platform Configuration Procedure](#)

1. Store the ISO file to the local disk.
2. Open a web browser and enter the IP address of server ILO. After security exception a login page will appear. Log in as root.
3. Navigate to the Remote Console tab.
4. Click on Integrated Remote Console.
An Integrated Remote Console window appears.
5. Click on Virtual Media which is visible in blue bar at the top of the Integrated Remote Console window.
6. Navigate to Image with a small CD-ROM picture on the left side. Click on Mount.
A window will pop up asking for the ISO path. Navigate to the ISO file and click Open.
7. Now the ISO file is mounted on a target server as a virtual CD-ROM. Such new device will appear under /dev/ directory.

To find the new virtual CD-ROM media run on a target server as root:

```
# getCDROMmedia
```

This will list a virtual CD-ROM media devices with the exact device name.

Example output:

```
[root@ixp1977-1a ~]# getCDROMmedia  
HP Virtual DVD-ROM:scd0
```

This record denotes virtual CD-ROM device /dev/scd0 ready for any other operation.

Configure and Verify ILO Connection

Note: For latest procedure to configure iLO, please refer Doc Id E53486 [Platform Configuration Procedure](#)

This procedure is applicable to all HP.

ILO is an independent subsystem inside a HP server, which is used for out of band remote access. This subsystem permits to monitor, power-off, and power-on the server through a LAN-HTTP interface. The setup of this device shows up during each power-on sequence of the server. When the message for ILO configuration is proposed, hit the <F8> key and follow the on-screen instruction. In case of no user action after a few seconds, the boot sequence continues to the next step. In this situation, it would be necessary to reboot the device to return to this choice.

Recommended configuration consists of assigning an IP address to the system and creates a “root” user. This setup needs to be done in accordance with the customer’s supervision environment.

Minimal steps are:

- Menu "Network", "DNS/DHCP", "DHCP enable", change to OFF, save [F10]
- Menu "Network", "NIC and TCP/IP", fill-in the IP address, Subnet Mask, Gateway, Save [F10]
- Menu "User", "Add user", "User name" root, "Password", < same-value-than-TPD >
- Menu " File", exit and save

For verification of the setup, connect the ILO interface to the network switch.

1. Open Internet Explorer on a workstation and enter in the ILO IP address.
2. You will get a SSL security warning
3. Accept the warning.
4. Once you are logged in click on Launch to start Integrated Remote Console
5. If you will receive another certificate warning click on Yes to continue
6. If you get the application's digital signature can not be verified click Always trust content from this publisher then click Run.
7. A remote console window will now appear to allow you to access the HP server.

Granting and revoking DBA role to NSP user

Revoke DBA role from NSP user after NSP installed on one box

1. Login to NSP machine and change user to oracle by command:

```
# su - oracle
```

2. Login to sqlplus console using command:

```
# export ORACLE_SID=NSP
# ORAENV_ASK=NO source oraenv
# sqlplus / as sysdba
```

3. Execute command to revoke DBA and grant necessary privilege from NSP user

```
# REVOKE DBA FROM NSP;
# GRANT CREATE ANY DIRECTORY TO NSP;
# GRANT UNLIMITED TABLESPACE TO NSP;
# GRANT CREATE DATABASE LINK TO NSP;
# GRANT CREATE ANY VIEW TO NSP;
```

Note: Ignore errors if any.

4. Execute below command to confirm that DBA role has been revoked from NSP user or not

```
# SELECT GRANTED_ROLE FROM DBA_ROLE_PRIVS WHERE GRANTEE = 'NSP';  
GRANTED_ROLE  
-----  
RESOURCE  
CONNECT
```

If the result of above command still contains DBA role in result set then refer to [Appendix A: My Oracle Support](#)

Grant DBA role to NSP user after NSP is installed on one box

1. Login to NSP machine and change user to oracle by command:

```
# su - oracle
```

2. Login to sqlplus console using command:

```
# export ORACLE_SID=NSP  
# ORAENV_ASK=NO source oraenv  
# sqlplus / as sysdba
```

3. Check whether NSP has DBA role or not by executing below command:

```
# SELECT GRANTED_ROLE FROM DBA_ROLE_PRIVS WHERE GRANTEE = 'NSP';  
GRANTED_ROLE  
-----  
RESOURCE  
CONNECT
```

If the output of command is same as show above then execute below steps to grant DBA role to NSP user but if DBA role is shown in the above list then skip the execution of below steps.

4. Execute command to grant the DBA privilege to NSP user

```
# GRANT DBA TO NSP;
```

Below message will appear on the console after successful completion of the command.

```
Grant succeeded.
```

5. Execute below command to confirm that DBA role has been granted to NSP user or not

```
# SELECT GRANTED_ROLE FROM DBA_ROLE_PRIVS WHERE GRANTEE = 'NSP';  
  
GRANTED_ROLE  
-----  
  
RESOURCE  
  
CONNECT  
  
DBA
```

If the result of above command is not the same as shown above and still does not show DBA role in the result set then refer to [Appendix A: My Oracle Support](#)

Chapter 12: How to access console of VM in oda

1. Login on ODA_BASE as root user with default password
2. Execute following command to get the VM names

```
$ oakcli show vm
```

3. Execute following command to access the VM console

```
$ oakcli show vmconsole <vm_name>
```

Name is obtained from step 2.

Appendix A: My Oracle Support

MOS (<https://support.oracle.com>) is your initial point of contact for all product support and training needs. A representative at Customer Access Support (CAS) can assist you with MOS registration.

Call the CAS main number at 1-800-223-1711 (toll-free in the US), or call the Oracle Support hotline for your local country from the list at <http://www.oracle.com/us/support/contact/index.html>. When calling, make the selections in the sequence shown below on the Support telephone menu:

1. Select 2 for New Service Request
2. Select 3 for Hardware, Networking and Solaris Operating System Support
3. Select 2 for Non-technical issue

You will be connected to a live agent who can assist you with MOS registration and provide Support Identifiers. Simply mention you are a Tekelec Customer new to MOS.

MOS is available 24 hours a day, 7 days a week.