

**Oracle® Communications
EAGLE**

Software Upgrade Guide

Releases 45.x and 46.x

E54340 Revision 3

June 2016

ORACLE®

Copyright © 1993, 2016 Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notices are applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to thirdparty content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.



CAUTION: Use only the guide downloaded from the Oracle Technology Network (OTN) (<http://www.oracle.com/technetwork/indexes/documentation/oracle-comms-tekelec-2136003.html>). **Before upgrading your system, access the My Oracle Support web portal (<https://support.oracle.com>) and review any Knowledge Alerts that may be related to the System Health Check or the Upgrade.**

Before beginning this procedure, contact My Oracle Support and inform them of your upgrade plans. Refer to Appendix F for instructions on accessing My Oracle Support.

TABLE OF CONTENTS

1. INTRODUCTION.....	6
1.1 Purpose and Scope	6
1.2 References.....	6
1.2.1 External	6
1.2.2 Internal	6
1.3 Software Release Numbering.....	7
1.4 Database Version Number	7
1.5 Acronyms	7
Terminology	8
1.6 Recommendations.....	9
2. GENERAL DESCRIPTION	10
3. UPGRADE OVERVIEW	12
3.1 Required Materials	12
3.2 Upgrade Preparation Overview	12
3.3 Pre-Upgrade Overview	13
3.4 Upgrade Execution Overview	13
3.5 Backout Procedure Overview	14
4. UPGRADE PREPARATION	15
4.1 Hardware Upgrade Preparation.....	15
4.2 Software Upgrade Preparation	16
5. SOFTWARE UPGRADE PROCEDURE	17
5.1 Software Upgrade Execution – Session 1.....	17
5.2 OAM Conversion	32
5.3 Completion of Session 1.....	37
5.4 Upgrade Session 2.....	42
6. RECOVERY PROCEDURES	55
6.1 Backout Setup Procedures.....	55
6.2 Recovery Procedure A	55
6.3 Recovery Procedure B	57
6.4 Recovery Procedure C	74
APPENDIX A. UPGRADING FLASH-BASED GPL ON NON-IN-SERVICE AND UNPROVISIONED NETWORK CARDS.....	82
APPENDIX B. PREPARATIONS FOR UPGRADE EXECUTION	84
APPENDIX C. ENTERING UPGRADE SOFTWARE ACCESS KEY	97
APPENDIX D. SUPPLEMENTAL INFORMATION FOR PROCEDURE 8, STEP 2	98
APPENDIX E. CUSTOMER SIGN OFF	102
APPENDIX F. MY ORACLE SUPPORT	103

List of Figures

Figure 1 - Upgrade Process 10

List of Tables

Table 1. Acronyms 7
Table 2. Terminology 8
Table 3. Generic VS. E5-OAM Terminology 8
Table 4. Upgrade Tasks to be completed 10
Table 5. Phases of Upgrade Execution 11
Table 6. Upgrade Readiness Activities 12
Table 7. Pre-Upgrade Execution Activities 13
Table 8. Upgrade Execution Overview 13
Table 9. Post Upgrade Overview 14
Table 10. Backout Procedure Overview 14
Table 11. Equipment Inventory before Upgrade if media software delivery (MSD) 15
Table 12. Equipment Inventory before Upgrade if server software delivery (SSD) 15
Table 13. Spare Equipment after Upgrade if media software delivery (MSD) 15
Table 14. Spare Equipment after Upgrade if server software delivery (SSD) 16
Table 15. Pre-Upgrade Requirements 18
Table 16. DDL-Hunt-related UAM ranges 21
Table 17. Retrieve Log Termination Pass/Fail Criteria: 21
Table 18. Act Upgrade Command Actions 33
Table 19. Upgrade Session 2 Requirements 42
Table 20. MTT errors generated when measurement collection is in progress. 44
Table 21. Recovery from DDL Hunt by UAM. 100

List of Procedures

Procedure 1: Verifying Pre-Upgrade Requirements and Capturing Upgrade Data	17
Procedure 2: Backing Up the Database.....	22
Procedure 3: Updating the Source-Release Spare Fixed Disk	24
Procedure 4: Verifying All Databases	26
Procedure 5: Initializing MASP's to Run on Target-Release GPLs	27
Procedure 6: Verifying the Target Release and Software Access Key	31
Procedure 7: Verifying all Databases.....	32
Procedure 8: STP Conversion	33
Procedure 9: Completing Upgrade/Return to Full-Function Mode	37
Procedure 10: Backing up Converted Database.....	38
Procedure 11. Verifying Upgrade Session 2 Requirements.....	42
Procedure 12: Upgrading Removable medias.....	43
Procedure 13: Backing Up Fixed Disk	46
Procedure 14: Upgrading Spare Fixed Disks	47
Procedure 15: Upgrading Spare MUX cards	50
Procedure 16: Verifying All Databases	53
Procedure 17: Session 2 Completion	54
Procedure 18: Load and Run Source OAM	55
Procedure 19: Full Fallback using Spare E5-MASP.....	57
Procedure 20: Full Fallback using Fixed Disk as OAM conversion workspace – Case 1	63
Procedure 21: Full Fallback using Fixed Disk as OAM conversion workspace – Case 2.....	64
Procedure 22: Full Fallback using Fixed Disk as OAM conversion workspace – Case 3	69
Procedure 23: Fall Back Procedure for Network Cards.....	74
Procedure 24: Restoring Flash-Based Service Cards.....	76
Procedure 25: Restoring Flash-Based Link Cards	78
Procedure 26: Restoring Mux Cards.....	79
Procedure 27: Flashing Inactive Cards	82
Procedure 28: Create Upgrade USB Media	87
Procedure 29: Download Target Release to Inactive Partition	86
Procedure 30: Preparation for Upgrade to use the Card-Set Network Conversion Method.	91
Procedure 31: Validate Upgrade Software Access Key.....	97

1. INTRODUCTION

1.1 Purpose and Scope

This document describes methods utilized and procedures executed to perform a software upgrade on any in-service EAGLE-based STP to EAGLE Software Release 45.0, 45.1, 46.0, 46.1, 46.2, or 46.3 as well as any future maintenance releases. The audience for this document includes Oracle customers as well as these Oracle Communications EAGLE groups: Software Development, Product Verification, Technical Communications, and Customer Service including the Upgrade Center and New Product Engineering. This document provides step-by-step instructions to execute any upgrade to Release 45.0 and beyond.

See appropriate upgrade kit instructions/references for the software upgrade of peripheral equipment.

1.2 References

1.2.1 External

- [1] *EAGLE5 ISS 45.0 and above Health Check Procedure*, E54339, latest revision, Tekelec
- [2] *EAGLE 5 45.0 Maintenance Manual*, 910-6666-001, latest revision, Tekelec
- [3] *EAGLE 5 45.0 Database Administration – System Management*, 910-6665-001, latest revision, Tekelec

1.2.2 Internal

The following are references internal to Oracle. They are provided here to capture the source material used to create this document. Internal references are only available to Oracle personnel.

- [4] EAGLE Hardware Field Baseline, 820-2410-01, latest revision, Tekelec.
- [5] *TEKELEC Acronym Guide*, MS005077.doc, current revision
- [6] Tekelec Eagle - Eng Release Mapping web page, http://devtools.nc.tekelec.com/cgi-bin/eng_eag.cgi, Tekelec.
- [7] Tekelec CSR-PR Reports By Build, http://devtools.nc.tekelec.com/cgi-bin/release_desc.cgi
- [8] Tekelec Tekpedia web page, [http://tekpedia.ssz.tekelec.com/tekpedia/index.php/Methods_to_correct_distributed_network_database_\(DDB\)_inconsistencies](http://tekpedia.ssz.tekelec.com/tekpedia/index.php/Methods_to_correct_distributed_network_database_(DDB)_inconsistencies), Tekelec.
- [9] EAGLE 45.0 Product Functional Specification PF005994, latest version, GSS Product Management.
- [10] EAGLE 45.1 Product Functional Specification PF006147, latest version, GSS Product Management.
- [11] EAGLE 46.0 Product Functional Specification PF006165, latest version, GSS Product Management.

1.3 Software Release Numbering

To determine the correct GPL version numbers for the EAGLE® applications, refer to the appropriate internal release-mapping web tool or to the *Release Notice* located on **My Oracle Support** web portal. Appendix F describes how to access **My Oracle Support** web portal. For FOA releases or Engineering prototype releases, refer to internal references [6] in section 1.2.2.

Note: verifying the correct GPL versions, ensures that the system is being upgraded to the correct target software release.

1.4 Database Version Number

To determine the correct database version numbers for the EAGLE® release, refer to the appropriate internal release-mapping web tool. Appendix F describes how to access **My Oracle Support web portal**. For FOA releases or Engineering prototype releases, refer to internal references [6] in section 1.2.2.

1.5 Acronyms

Table 1. Acronyms

AWA	Alternate Work Area
DDB	Dynamic Database
DDL	Dynamic Data Load
E5-MDAL	EAGLE Maintenance Disk and Alarm Card
E5-OAM	EAGLE Operation, Admission, & Maintenance.
FAK	Feature Access Key
FOA	First Office Application
GA	General Availability
GLS	Generic Loading Service
GPL	Generic Program Load
GPSM	Legacy General Purpose Service Module
IMT	Interprocessor Message Transport
IS-NR	In Service - Normal
IS-ANR	In Service - Abnormal
KSR	Keyboard Send & Receive
LA	Limited Availability
LIM	Link Interface Module
LNP	Local Number Portability
LSMS	Local Service Management System
MCPM	Measurement Collection and Polling Module
MPS	Multi Purpose Server
MSD	Media Software Delivery
OAM	Operations Administration and Maintenance
OAP	Operations, Administration and Maintenance Applications Processor
OOS-MT	Out Of Service - Maintenance
RMD	Removable Media Drive/Disk such as USB
SAK	Software Access Key
SATA	Serial ATA
SEAS	Signaling Engineering and Administration System
SSD	Server Software Delivery
STP	Signal Transfer Point
TDM	Terminal Disk Module
TPS	Transactions Per Second (feature)
UHC	Upgrade Health Check

For additional Acronyms; refer to internal references [5] in section 1.2.2.

Terminology

Table 2. Terminology

Backout (abort)	The process to take a system back to a Source Release prior to completion of upgrade and commitment to Target release. Includes restoration of source databases and system configuration.
DDay	Date of the start of the maintenance window of the upgrade execution.
E5-OAM system	An EAGLE running with E5-MCAP & E5-MDAL cards for front-end hardware.
Fixed disk based upgrade	An upgrade that uses the inactive partitions of the fixed disks as the workspaces to covert the data. With 9Gb and bigger hard drives, this is the expected method.
HHour	Hour at which the system enters upgrade phase 0 during upgrade execution.
Incremental upgrade	EAGLE: Upgrade to a maintenance release (external customers) or upgrade to a new build (internal test labs).
Intra-release upgrade	Any upgrade within a release; this includes incremental as well as full function upgrades where only the minor database version changes. Note: Intra-release upgrades are not covered by this document.
Intrusive Operation	Operation that impacts the redundancy of the system by isolation of the duplicate component.
Legacy system	An EAGLE running with GPSMII, TDM, & MDAL cards for front-end hardware. This hardware is obsolete beginning in Release 45.0.
Non-intrusive Operation	Operation that collects data and does not impact the redundancy of the system.
Non-preserving upgrade	“Upgrade” that does not adhere to the standard goals of software upgrade methodology. The outcome of the execution is that the system is running on the Target Release; however the Source Release database was not preserved.
Rollback	The process to take a system from a Target Release back to a Source Release including preservation of databases and system configuration.
Session 0	This is a new set of tasks required in the Upgrade Health Check #2 timeframe. The work needs to be accomplished successfully prior to the execution of the upgrade.
Source release	Software release from which the system is upgraded.
Target release	Software release to which the system is upgraded.
Upgrade Media	The USB thumb drives for E5-MCAP systems

Table 3. Generic VS. E5-OAM Terminology

Generic Term	E5-OAM Term
Drive Slot	Thumb Drive on the E5-MCAP
Fixed Disk	Sata Drive
MASP	E5-MCAP
Removable media	Removable media
RMD	USB Thumb Drive
Upgrade media	USB Thumb Drive

1.6 Recommendations

1. It is recommended that command input and command-line/scroll-area output be captured during the execution of an upgrade. The preferred method is the use of two serial terminals; one used to enter commands and to echo to the second, which is set to capture all output except for traffic-related unsolicited messages. These terminals should be configured as KSR type. Another acceptable method is the use of one serial terminal, which has a terminal-emulation application that supports input/output capture. This terminal should be set to the KSR type. It is unacceptable to use a telnet terminal since it does not support the echo capability. Serial terminals are designated ports 1 – 16 and telnet terminal are designated ports 17 and above.
2. It is recommended that measurement collection be retrieved prior to upgrade execution because, if the MCPM or Intergrated Measurements features are not enabled, the data collected will not be persistent across the upgrade. Inhibiting measurements does NOT stop collection that is already in progress. OAM-based measurements are inhibited on the next cycle. It is recommended that time should be given to allow the current cycle to complete. Those procedures that inhibit measurements manually contain steps to ensure that current collection is complete.
3. It is recommended that the OAP terminals be turned down for SEAS-enabled systems and others with high OAP traffic. If OAP terminals are not inhibited, any database updates successfully entered during the period between the last database backup and Upgrade Phase 0 are lost if it becomes necessary to fall back to the source release using the spare E5-MASP.
4. It is recommended that the Measurements Platform NOT be shut down and the Measurement Collection and Polling Module (MCPM) cards NOT be inhibited.
5. It is recommended to issue the command in Procedure 8, Step 1 with the threshold type assigned to SET (Card Set network conversion method.) In addition, it is recommended that the card sets be created with the number of service card sets assigned to 2 and the number of link card sets to 4. The following command is issued in Procedure 8, Step 1:

ACT-UPGRADE:ACTION=CONVERTSTP:SRC=FIXED

Based on a system's configuration and customer objectives, the SRVSETS and LIMSETS parameters of the CHG-UPGRADE-CONFIG comand may be adjusted. Refer to Appendix B.2for the procedure to configure the Card Set network conversion method. If the network conversion phase of the upgrade is pushing the execution of the upgrade outside the maintenance window the configuration can be altered to reduce the execution time. Please go to Appendix F to contact support to determine the recommended course of action.

6. Although an IP telnet terminal may be configured, the terminal is not recommended for use in the upgrade process because it does not support echo and capture mode. Any application connected via a Telnet session through an IPSM card, should be configured for interruption during the upgrade. That application's configuration procedure needs to be provided by the application's manufacturer.
7. The following commands obtain the current system status. It is recommended that the following commands be run in order to obtain the current system status in the following situations: 1) prior to executing the upgrade, 2) the upgrade terminates prior to successful completion and 3) before re-starting the upgrade. The commands should be issued in addition to the diagnosis of the any terminating condition. This status is not complete and inclusive, additional commands, which are deemed relevant, can be run at that time.

```
REPT-STAT-SYS
REPT-STAT-GPL:DISPLAY=ALL
REPT-STAT-CARD
REPT-STAT-SLK
REPT-STAT-TRBL
RTRV-TRBL:NUM=25:LOC=<1113|1115>
RTRV-STP
ACT-UPGRADE:ACTION=DBSTATUS
```

2. GENERAL DESCRIPTION

This document defines the step-by-step actions performed to execute a software upgrade of an in-service EAGLE® STP from the source release to the target release.

Figure 1 - Upgrade Process shows the general steps for all processes of performing a software upgrade, from hardware inventory to final upgrade health check.

Figure 1 - Upgrade Process

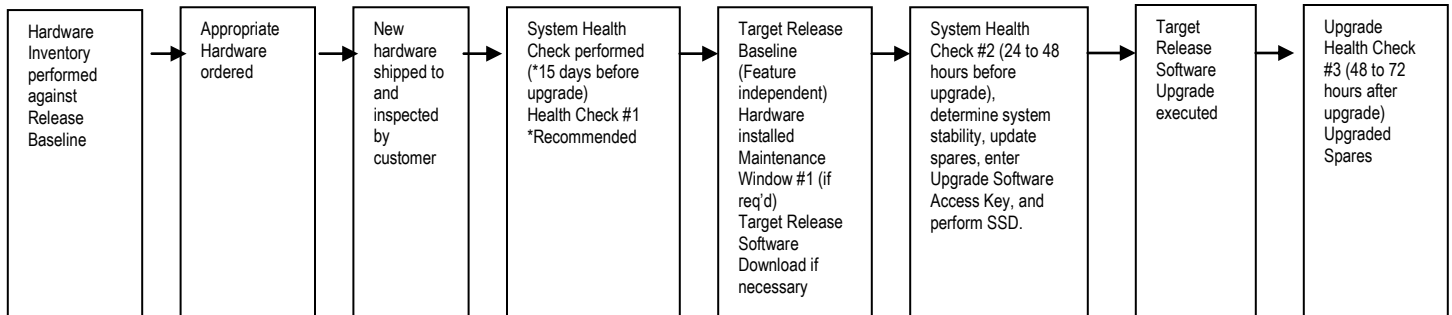


Table 4 contains a checklist of the steps required to successfully complete the upgrade process.

Upgrade Process Task	Date completed	Reference
Hardware Inventory		
Hardware Ordered		
New Hardware received		
System Health Check #1 performed.		[1]
System Health Check #1 output verified		
Target Release Baseline Hardware installed		
Target Software Release download (via Electronic Software Distribution or Upgrade Media).		[Appendix B.1.]
System Health Check #2 performed.		[1]
Enter Upgrade Software Access Key		[Appendix C]
Configure Network Conversion Method.		[Appendix B.2]
System Health Check #2 verified		
Software Upgrade Session 1 completed		
Health Check #3 performed.		[1]
Software Upgrade Session 2 completed		

Table 4. Upgrade Tasks to be completed

During the software upgrade execution, phase flags are displayed in the output messages to indicate upgrade progress. The output messages shown in this document are for example purposes only and do not display upgrade phase values unless a specific request to verify the phase is given, i.e., Procedure 6, step 15. The goal in doing this is to make this document describe the generic upgrade procedure.

Table 5. Phases of Upgrade Execution shows the phase flags displayed during the upgrade process. These flags are used to indicate the progress made by the upgrade function. The internal upgrade processing, which is initiated by the activate-upgrade command, controls these flags.

Table 5. Phases of Upgrade Execution

Release Displayed	Phase Indicator¹	Conversion	Software Running	Database Configuration
Source			Source	Source
Source	Phase 0	Database	Target	Source
Target	Phase 2	Database	Target	Target
Target	Phase 3	Network	Target	Target
Target			Target	Target

¹ Over the evolution of the upgrade process, Phase 1 is considered an error state.

3. UPGRADE OVERVIEW

This section provides a brief overview of the recommended method for upgrading the source release software that is installed and running on an EAGLE® STP to the Target Release software. The basic upgrade process and approximate time frame is outlined in Table 6. Upgrade Readiness Activities, Table 7. Pre-Upgrade Execution Activities, Table 8. Upgrade Execution Overview and Table 9. Post Upgrade Overview with the backout procedure shown in Table 10. Backout Procedure Overview.

It is assumed that upgrade of peripheral(s) is coordinated with and executed in parallel with the EAGLE upgrade to ensure that all work is performed within the maintenance window. Note that several variables affect the upgrade times shown in the tables – the timing values shown are estimates only.

The EAGLE has no known restriction that would prevent the upgrading of any peripheral in parallel with it.

3.1 Required Materials

1. One (1) source release system removable media.
2. One (1) target-release upgrade media for MSD or FTP server for remote download.
3. A valid EAGLE login ID and password with all user privileges enabled.
4. One (1) spare fixed disk at the source release: required in the event of recovery.
5. Capability to capture data via a printer, PC, or modem to allow remote access for **My Oracle Support** personnel.
6. List of GPLs from section 1.3 should be kept on hand for reference throughout the upgrade or refer to Appendix F to locate the Release Notice on **My Oracle Support web portal**.
7. The Software Access Key (SAK) must be available and entered (this activity should be done during the same maintenance window as the upgrade health check #2.)

3.2 Upgrade Preparation Overview

The activities listed in Table 6 need to be accomplished successfully prior to the maintenance window in which the upgrade is to be executed in. A day is equivalent to the period of time between scheduled maintenance windows.

Session / Phase	Time Frame	Activity	Impact
UHC #1	Dday – 7	Upgrade Health Check # 1	Non-intrusive
Session 0	Dday – 2	Target Release Software Download	Intrusive (format-disk, OAM boot)
UHC #2	Dday – 2	Upgrade Health Check # 2	Intrusive (H/W swap, IMT bus)
Session 0	Dday – 2	Configure Card-Set Network Conversion Method	Non-intrusive
Session 0	Dday – 2	Entering Upgrade Software Access Key	Non-intrusive

Table 6. Upgrade Readiness Activities

3.3 Pre-Upgrade Overview

The pre-upgrade procedures, shown in Table 7, may be optionally executed prior to entering the maintenance window. All of these activities are completed during Session 1.

Session / Phase	Time Frame	Activity	Impact
Pre-Phase 0	Hhour – 2	Verify Pre-Upgrade Requirements and Capturing Upgrade Data	Non-intrusive
Pre-Phase 0	Hhour – 2	Retrieve System's Node-Level Processing Option Indicators	Non-intrusive
Pre-Phase 0	Hhour – 2	Backing Up the Database	Non-intrusive
Pre-Phase 0	Hhour – 1	Updating the Source Release Spare E5-MASP	Non-intrusive
Pre-Phase 0	Hhour – 1	Verifying All Database	Non-intrusive
Pre-Phase 0	Hhour	Inserting Target Release System Removable Media.	Non-intrusive

Table 7. Pre-Upgrade Execution Activities

3.4 Upgrade Execution Overview

The procedures, shown in Table 8, are executed in the maintenance window.

Session / Phase	Time Frame	Activity	Impact
Pre-Phase 0	Hhour	Retrieve measurements data reports	Non-intrusive
Phase 0	Hhour	Initializing Front-End to Run in the Target Release.	Intrusive
Phase 0	Hhour	Verifying all Databases	Non-intrusive
Phase 0 & 2	Hhour	OAM Conversion	Intrusive
Phase 3	Hhour	Network Conversion	Intrusive

Table 8. Upgrade Execution Overview

The procedures, shown in Table 9. Post Upgrade Overview, are executed in the maintenance window.

Session / Phase	Time Frame	Activity	Impact
Phase 3	Hhour + 3	Completing Upgrade/Return to Full Function Mode.	Non-intrusive
Post-upgrade	Hhour + 3	Backing Up Converted Database	Non-intrusive
Session 2	Dday + 2	Upgrading Removable Media	Non-intrusive
Session 2	Dday + 2	Backing Up Fixed Disk	Non-intrusive
Session 2	Dday + 2	Upgrade Spare Fixed Disk.	Intrusive
Session 2	Dday + 2	Verifying All Databases.	Non-intrusive

Table 9. Post Upgrade Overview

3.5 Backout Procedure Overview

The procedures, shown in Table 10. Backout Procedure Overview, are executed in the maintenance window.

Session / Phase	Time Frame	Activity	Impact
Phase 0 - 3	Hhour	Load and Run Source OAM	Non-intrusive
Phase 0 - 3	Hhour	Full fallback using Fixed Disk as OAM conversion workspace – Case 1 Or Full fallback using Fixed Disk as OAM conversion workspace – Case 2 Or Full fallback using Fixed Disk as OAM conversion workspace – Case 3	Intrusive
Phase 0 - 3	Hhour	Network Conversion to Source Release	Intrusive

Table 10. Backout Procedure Overview

4. UPGRADE PREPARATION

- Perform hardware inventory to identify any hardware not supported by the target release baseline.
- Bring all non-supported hardware up to baseline (to be coordinated with **My Oracle Support** personnel).
- Perform pre-upgrade system health checks to establish that the system is fit to upgrade.
- Download target release software if necessary (E5-MASP) or capability available.
- Configure network conversion to use Card-Set method.
- Enter upgrade Software Access Key (SAK).

4.1 Hardware Upgrade Preparation

Before the upgrade execution, the customer site should have three source-release fixed drives (E5-TDMs \ Sata fixed drives) and at least one source-release removable media (two if using SSD). If MSD, a target-release upgrade media drive (USB drives for E5-MASP systems) must be created as outlined in [appendix B1](#) before the upgrade. Before the target release installation, the spare equipment inventory should be as shown in Table 11 and Table 12.

Table 11. Equipment Inventory before Upgrade if media software delivery (MSD)

Equipment	In-service	Spare	Upgrade	Totals:
Source-release fixed drives	2	1	0	3
Source-release removable media	1	0	0	1
Target-release fixed drives	0	0	0	0
Target-release upgrade media	0	0	1	1

Table 12. Equipment Inventory before Upgrade if server software delivery (SSD)

Equipment	In-service	Spare	Upgrade	Totals:
Source-release fixed drives	2	1	0	3
Source-release removable media	2	0	0	2
Target-release fixed drives	0	0	0	0
Target-release upgrade media	0	0	0	0

During the procedure, both the active and standby in-service source-release E5-TDMs are converted to the target release and the spare is reserved in case a fallback to the source release is required. Upon completion of the procedure, the spare equipment should be as shown in Table 13 and Table 14. **NOTE:** the spare E5-TDM and source-release RMDs are upgraded to the target release in the second session. This allows a soak period for the target release and the possibility to fallback to the source release.

Table 13. Spare Equipment after Upgrade if media software delivery (MSD)

Equipment	In-service	Spare	Upgrade	Totals:
Source-release fixed drives	0	0	1	1
Source-release removable media	0	0	1	1
Target-release fixed drives	2	0	0	2
Target-release upgrade media	1	0	0	1

Table 14. Spare Equipment after Upgrade if server software delivery (SSD)

Equipment	In-service	Spare	Upgrade	Totals:
Source-release fixed drives	0	0	1	1
Source-release removable media	0	0	1	1
Target-release fixed drives	2	0	0	2
Target-release upgrade media	1	0	0	1

4.2 Software Upgrade Preparation

In releases 45.x and 46.0, it is necessary for the customer to obtain a Software access Key (SAK) from Oracle to perform the upgrade; the SAK should be entered during System Health Check #2 (see Appendix C). The SAK is used in the validation of the target release software. In release 46.1 and higher, it is not necessary for the customer to obtain a SAK. Also, the target release software needs to be loaded onto the inactive partition of the E5-TDMs (see Appendix B). The release can either be downloaded from the E5-MASP upgrade media (USB drive) or via an FTP server. In order to utilize this software download capability via an FTP server, the EAGLE must have an IPSM Card installed in the system. See General Description section for general steps and timeline associated with the upgrade process.

5. SOFTWARE UPGRADE PROCEDURE

Call the Oracle support hotlines [see Appendix F] prior to executing this upgrade to ensure that the proper media are available for use.

Before upgrade, users must perform the EAGLE system health check [1]. This check ensures that the system to be upgraded is in an upgrade-ready state. Performing the system health check determines which alarms are present in the system and if upgrade can proceed with these alarms.

**** WARNING ****

If there are cards in the system, which are not in IS-NR state, these cards should be brought to the IS-NR before the upgrade process is started. If it is not possible to bring the cards IS-NR, contact [My Oracle Support](#) [see Appendix F]. If any card cannot be brought in-service, the card should be inhibited after entering Phase 2 (during procedure 8). If any GLS card is in OOS-MT or IS-ANR state, none of the SCCP or LIM cards will load. If any LIM card is in OOS-MT state, this will prohibit the STPLAN cards from loading. The sequence of upgrade is such that cards providing support services to other cards will be upgraded first.

**** WARNING ****

Do not start the upgrade process without the required spare equipment; without spare equipment, recovery procedures cannot be executed!

Please read the following notes on upgrade procedures:

1. Procedure completion times shown here are estimates. Times may vary due to differences in database size, user experience, and user preparation.
2. Command steps that require user entry are indicated with white-on-black step numbers.
3. The shaded area within response steps must be verified in order to successfully complete that step.
4. Where possible, EXACT command response outputs are shown. EXCEPTIONS are as follows:
 - Banner information is displayed in a format form only.
 - System-specific configuration information such as **card location, terminal port # assignments, and system features**.
 - ANY information marked with “XXXX” or “YYYY.” Where appropriate, instructions are provided to determine what output should be expected in place of “XXXX or YYYY”
5. After completing each step and at each point where data is recorded from the screen, a check box should be provided.
6. Captured data is required for future support reference.
7. Each procedural step is numbered chronologically within each procedure.

5.1 Software Upgrade Execution – Session 1

Procedure 1: Verifying Pre-Upgrade Requirements and Capturing Upgrade Data

S	This procedure verifies that all pre-upgrade requirements have been met.
T	
E	Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.
P	
#	Should THIS PROCEDURE FAIL, Contact the Oracle support hotlines [see Appendix F] AND ASK FOR UPGRADE ASSISTANCE .

Procedure 1: Verifying Pre-Upgrade Requirements and Capturing Upgrade Data

1 <input type="checkbox"/>	Complete pre-upgrade tasks	All tasks in Table 15 must be completed before continuing.
-------------------------------	----------------------------	------------------------------------------------------------

Table 15. Pre-Upgrade Requirements

√	Tasks to be completed prior to upgrade execution
	Perform hardware inventory.
	Verify that all target-release baseline hardware has been installed. And any obsolete hardware has been replaced.
	Verify that a full complement of EAGLE [®] spares is available, including a source-release fixed disk. Note: This fixed disk's database should have been repaired in Upgrade Health Check [1].
	Verify that you have at least one source-release RMD with an up-to-date database. Note: This drive's database should have been backed up in Upgrade Health Check [1].
	Verify that you have one target-release upgrade media drives provided by Oracle for upgrade Or Target-Release software has been downloaded to the inactive disk partitions (see section 4.2)
	Verify that you have a copy of the Target Release's System Release Notes (see section 1.3.)
	Verify that an EAGLE system health check has been performed and the output capture file has been validated by My Oracle Support .
	Perform upgrade time calculations to ensure that the upgrade can be completed within the window.
	Collect all measurement reports.
	Verify that all required documentation is included in the upgrade kit. [See section 4.2]

Procedure 1: Verifying Pre-Upgrade Requirements and Capturing Upgrade Data

<input type="checkbox"/>	<p>2 Issue the command to display terminal status.</p>	<pre>rtrv-trm</pre>
<input type="checkbox"/>	<p>3 Response to retrieve terminal command is displayed.</p> <p>Record the terminals in the TRM column that have TYPE of PRINTER². Also record the terminal being used to enter commands (the user terminal)³ Or terminals used by external applications that issue commands to the EAGLE. In this example, terminal 12 is a printer, terminal 10 is the user terminal, and terminal 2 is KSR.</p> <p>Capture _____²</p> <p>USER _____³</p> <p>Ext. Application: _____⁴</p> <p>See recommendation #1 & #6 in section 1.6</p> <p>If not echoing to the printer or KSR, go to step 8.</p> <p>Record the initial output group configurations for the user's and capture terminals. Also, record the user's TMOUT value.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y rtrv-trm Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y TRM TYPE COMM FC TMOUT MXINV DURAL 1 OAP 19200 -7-E-1 SW 30 5 00:01:00 2 KSR 9600 -7-E-1 SW 30 5 00:01:00 3 NONE 9600 -7-E-1 SW 30 5 00:01:00 4 NONE 9600 -7-E-1 SW 30 5 00:01:00 5 NONE 9600 -7-E-1 SW 30 5 00:01:00 6 NONE 9600 -7-E-1 SW 30 5 00:01:00 7 NONE 9600 -7-E-1 SW 30 5 00:01:00 8 NONE 9600 -7-E-1 SW 30 5 00:01:00 9 OAP 19200 -7-E-1 SW 30 5 00:01:00 10 KSR 9600 -7-E-1 SW 30 5 00:01:00 11 NONE 9600 -7-E-1 SW 30 5 00:01:00 12 PRINTER 9600 -7-E-1 SW 30 5 00:01:00 13 VT320 9600 -7-E-1 SW 30 5 00:01:00 14 NONE 9600 -7-E-1 SW 30 5 00:01:00 15 NONE 9600 -7-E-1 SW 30 5 00:01:00 16 NONE 9600 -7-E-1 SW 30 5 00:01:00 TRM TRAF LINK SA SYS PU DB 1 YES YES YES YES YES YES 2 NO NO NO NO NO NO 3 NO NO NO NO NO NO 4 NO NO NO NO NO NO 5 NO NO NO NO NO NO 6 NO NO NO NO NO NO 7 NO NO NO NO NO NO 8 NO NO NO NO NO NO 9 YES YES YES YES YES YES 10 YES YES YES YES YES YES 11 NO NO NO NO NO NO 12 YES YES YES YES YES YES 13 YES YES YES YES YES YES 14 NO NO NO NO NO NO 15 NO NO NO NO NO NO 16 NO NO NO NO NO NO ; USER _____ TMOUT ____ CAP _____</pre>
<input type="checkbox"/>	<p>4 Echo command input to capture terminal.</p> <p>If the capture terminal is the user terminal go to step 8.</p>	<pre>act-echo:trm=P (Where the value for P is one of the printer/KSR terminal port numbers recorded in Step 3)</pre>
<input type="checkbox"/>	<p>5 Response to activate command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y act-echo:trm=P Command entered at terminal #10. ;</pre>
<input type="checkbox"/>	<p>6 If capture terminal's output groups are not all set to YES, issue the change terminal command.</p>	<pre>chg-trm:trm=P:all=yes⁵ (P is the terminal port that is specified in step 4)</pre>
<input type="checkbox"/>	<p>7 Response to change terminal command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y chg-trm:trm=P:all=yes Command entered at terminal #10. ;</pre>

² Terminals with type equal to KSR as well as type equal to printer, which are configured, need to be recorded. Terminal being used to capture cannot be a Telnet terminal, see recommendation #6 in section 1.6

³ The user terminal cannot be a Telnet terminal, see recommendation #6 in section 1.6.

⁴ If an external application is connected via a Telnet terminal on an IPSM card, see recommendation #6 in section 1.7.

⁵ If the system displays continuous UAMs and the source of the UAMs are known issues, turn off the associated output groups to limit the information sent to printer/KSR terminal port.

Procedure 1: Verifying Pre-Upgrade Requirements and Capturing Upgrade Data

8	If the output group and timeout on the user terminal are not set correctly, issue the command to change terminal timeout and display groups.	chg-trm:trm=USER:all=no:sa=yes:sys=yes:db=yes:tmout=0 (Where the value of <i>USER</i> is the user terminal number shown in Step3)
9	Response to change terminal command is displayed.	eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y chg-trm:trm=USER:sa=yes:sys=yes:db=yes:tmout=0 Command entered at terminal #10. ;
10	Issue the command to display the system features	rtrv-feat
11	Response to retrieve features command is displayed.	eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y EAGLE FEATURE LIST GTT = on GWS = on NRT = off X25G = off LAN = on CRMD = off SEAS = off LFS = off MTPRS = off FAN = on DSTN5000 = off WNP = off CNCF = off TLNP = off SCCPCNV = off TCAPCNV = off IPISUP = off X252000 = off PLNP = off NCR = off ITUMTPRS = on SLSOCB = off EGTT = on VGTG = on MPC = on ITUDUPPC = on MEASPLAT = on TSCSYNC = off E5IS = off ;
12	Issue the command to display the FAK features.	rtrv-ctrl-feat
13	Response to retrieve command is displayed.	eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y The following features have been permanently enabled: Feature Name Partnum Status Quantity The following features have been permanently enabled: Feature Name Partnum Status Quantity FEATURE_A XXXXXXXXXX on ---- FEATURE_B XXXXXXXXXX on nn The following features have been temporarily enabled: Feature Name Partnum Status Quantity Trial Period Left Zero entries found. The following features have expired temporary keys: Feature Name Partnum Zero entries found.
14	Issue the command to display the system serial number.	rtrv-serial-num
15	Response to retrieve command is displayed. Record the system serial number as shown: SN: _____ Additionally, record in Appendix E. Verify the serial number is locked.	rtrv-serial-num Command entered at terminal #4. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y System serial number = nt00009999 system serial number is locked .
16	Issue the command to retrieve records from the event log.	rtrv-log:dir=bkwd:edate=YYMMDD:etime=HHMMSS:snum=XXXX:enum=YYYY:num=NNN (Where <i>YYMMDD</i> is today's date and <i>HHMMSS</i> is one hour ago.) (Where <i>XXXX</i> , <i>YYYY</i> , and <i>NNN</i> are the values listed in Table 16.)

Procedure 1: Verifying Pre-Upgrade Requirements and Capturing Upgrade Data

<input type="checkbox"/>	Response to retrieve command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Card 1113; SYS REL= 35.1.0-56.31.0; STP CLLI= tk1c1190601; Timezone= EST</pre>
<input type="checkbox"/>	Determine if the report termination reason meets the pass/fail criteria in Table 17.	<pre>****06-09-19 10:49:46**** 1426.0311 DPC 012-095-015 DPC is allowed ****06-09-19 10:49:45**** 1424.0314 DPC 012-095-015 Route is allowed ****06-09-19 10:46:33**** 0667.0312 * DPC 012-095-015 DPC is restricted ****06-09-19 10:46:33**** 0665.0312 * DPC 012-095-015 DPC is restricted ****06-09-19 10:32:19**** 3100.0311 DPC 012-079-001 DPC is allowed ****06-09-19 10:32:18**** 3098.0314 DPC 012-079-001 Route is allowed ****06-09-19 10:30:41**** 2828.0312 * DPC 012-079-001 DPC is restricted ****06-09-19 10:30:41**** 2827.0316 DPC 012-079-001 Route is prohibited ****06-09-19 10:30:41**** 2825.0312 * DPC 012-086-004 DPC is restricted UAM Report terminated - max. or num= count reached END OF LOG REPORT.</pre>
<input type="checkbox"/>	Repeat steps 16-17 for all sets of UAMs listed in Table 16.	

Table 16. DDL-Hunt-related UAM ranges.

	SNUM	ENUM	NUM	UAM Text*
	<i>Start UAM</i>	<i>End UAM</i>	<i>Maximum Events</i>	
<input type="checkbox"/>	200	200	15	RVCRY-LFK: link available
<input type="checkbox"/>	236	236	15	REPT-LFK: not aligned
<input type="checkbox"/>	264	275	50	REPT-LINK-CGST:congestion level X to Y RVCRY-LINK-CGST:congestion has cleared REPT-LINK-CGST:discard level X to Y RVCRY-LINK-CGST:discard has cleared
<input type="checkbox"/>	311	313	50	DPC is prohibited DPC is restricted DPC is allowed
<input type="checkbox"/>	314	316	50	Route is prohibited Route is restricted Route is allowed

* - For the description of these UAMs, see External Reference [2]

Table 17. Retrieve Log Termination Pass/Fail Criteria:

Termination Reason	Pass/Fail	Comment
- no records found within specified range	Pass	
- X records displayed (where X is less than NUM.)	Pass	
- max. or num= count reached	Further Analysis Required	See Appendix, D.2

Procedure 2: Backing Up the Database

<p>S T E P #</p>	<p>This procedure backs up the active current database to the fixed disk and the removable media. This procedure is required to retain changes made by this upgrade process and match the distributed network database.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR <u>UPGRADE ASSISTANCE</u>.</p>
<p>1 <input type="checkbox"/></p>	<p>Issue the command to display database status.</p> <p>rept-stat-db</p>
<p>2 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/></p>	<p>Response from the command is displayed.</p> <p>Look in the columns labeled 'C' and 'LEVEL' output by this command.</p> <p>Verify entries in column 'C' show 'Y' which indicates coherence.</p> <p>Verify both 'FD CRNT' Levels are equal.</p> <pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y DATABASE STATUS: >> OK << TDM 1114 (STDBY) C LEVEL TIME LAST BACKUP C LEVEL TIME LAST BACKUP ----- FD BKUP Y XXXX YY-MM-DD HH:MM:SS TTTT Y XXXX YY-MM-DD HH:MM:SS TTTT FD CRNT Y XXXX MCAP 1113 MCAP 1115 ----- RD BKUP Y XXXX YY-MM-DD HH:MM:SS TTTT Y XXXX YY-MM-DD HH:MM:SS TTTT USB BKP - - - - -</pre>
<p>3 <input type="checkbox"/></p>	<p>Issue the command to back up the database.</p> <p>chg-db:action=backup</p>
<p>4 <input type="checkbox"/> <input type="checkbox"/></p>	<p>Response to backup command is displayed.</p> <p>Command execution time: approximately 4 – 20 minutes, longer for large databases.</p> <pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y 5042.1114 CARD 1115 Database BACKUP started Report Date:YY-MM-DD Time:hh:mm:ss ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y BACKUP (FIXED): MASP B - Backup starts on active MASP. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y BACKUP (FIXED): MASP B - Backup on active MASP to fixed disk complete. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y BACKUP (FIXED): MASP B - Backup starts on standby MASP. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y 5045.1116 CARD 1115 Database action ended - OK Report Date:YY-MM-DD Time:hh:mm:ss ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y BACKUP (FIXED): MASP B - Backup on standby MASP to fixed disk complete. ;</pre>
<p>5 <input type="checkbox"/></p>	<p>Insert the RMD containing the source release into the drive slot.</p> <p>Wait for the RMD to be detected by the system.</p>
<p>6 <input type="checkbox"/></p>	<p>Issue the Change-Database command to back up the database to RMD.</p> <p>chg-db:action=backup:dest=remove</p>
<p>7 <input type="checkbox"/></p>	<p>Response to backup command is displayed.</p> <pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y chg-db:action=backup:dest=remove Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y BACKUP (REMOVABLE): MASP A - Backup starts on active MASP ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y BACKUP (REMOVABLE): MASP A - Backup to removable device complete ;</pre>
<p>8</p>	<p>Issue the command to copy the GPLs to RMD.</p> <p>copy-gpl</p>

Procedure 2: Backing Up the Database

<input type="checkbox"/>		
<input type="checkbox"/>	<p>Response to copy command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y copy-gpl Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y COPY GPL: MASP A - COPY STARTS ON ACTIVE MASP COPY GPL: MASP A - COPY TO REMOVABLE CARTRIDGE COMPLETE ;</pre>
<input type="checkbox"/>	<p>Issue the command to report database status.</p>	<p>rept-stat-db</p>
<input type="checkbox"/>	<p>Response to database status command is displayed.</p> <p>Check that all DB levels are the same.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y DATABASE STATUS: >> OK << TDM 1114 (STDBY) TDM 1116 (ACTV) C LEVEL TIME LAST BACKUP C LEVEL TIME LAST BACKUP ----- FD BKUP Y XXX YY-MM-DD hh:mm:ss TTTT Y XXX YY-MM-DD hh:mm:ss TTTT FD CRNT Y XXX MCAP 1113 MCAP 1115 ----- RD BKUP - - - - Y XXX YY-MM-DD hh:mm:ss TTTT USB BKP - - - - -</pre>
<input type="checkbox"/>	<p>Issue the command to display GPL status.</p>	<p>rtrv-gpl</p>
<input type="checkbox"/>	<p>Response from the retrieve command is displayed.</p> <p>Verify that the GPL versions that are displayed in the “RELEASE” and “REMOVE TRIAL” column are correct; see Section 1.3</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y GPL Auditing ON GPL CARD RELEASE APPROVED TRIAL REMOVE TRIAL GGGGGG1 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG1 1116 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG1 1113 ----- GGGGGG2 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG2 1116 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG2 1113 ----- GGGGGG3 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG3 1116 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG3 1113 ----- OAMHC 1114 XXX-XXX-XXX XXX-XXX-XXX ----- OAMHC 1116 XXX-XXX-XXX XXX-XXX-XXX ----- OAMHC 1113 ----- GGGGGG4 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG4 1116 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG4 1113 ----- GGGGGG5 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG5 1116 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG5 1113 ----- GGGGGG6 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG6 1116 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG6 1113 ----- ;</pre>
<input type="checkbox"/>	<p>Remove the Source-Release RMD.</p>	<p>Store the RMD in a safe location.</p>

Procedure 3: Updating the Source-Release Spare Fixed Disk

S T E P #	<p>This procedure backs up the active current database to the spare fixed disk to ensure that a valid recovery spare is available.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR UPGRADE ASSISTANCE.</p>																						
1 <input type="checkbox"/>	Issue the report card status command.	<pre>rept-stat-card:appl=oam</pre>																					
2 <input type="checkbox"/> <input type="checkbox"/>	<p>Response to the card status command is displayed.</p> <p>Record the card locations of both MASP's as well as the part number of the E5-MASP:</p> <p>Act E5-MASP _____</p> <p>p/n _____</p> <p>Stby E5-MASP _____</p> <p>p/n _____</p>	<table border="0"> <tr> <td>CARD</td> <td>VERSION</td> <td>TYPE</td> <td>GPL</td> <td>PST</td> <td>SST</td> <td>AST</td> </tr> <tr> <td>1113</td> <td>XXX-XXX-XXX</td> <td>E5MCAP</td> <td>OAMHC</td> <td>IS-NR</td> <td>Standby</td> <td>-----</td> </tr> <tr> <td>1115</td> <td>XXX-XXX-XXX</td> <td>E5MCAP</td> <td>OAMHC</td> <td>IS-NR</td> <td>Active</td> <td>-----</td> </tr> </table> <p>Command Completed.</p>	CARD	VERSION	TYPE	GPL	PST	SST	AST	1113	XXX-XXX-XXX	E5MCAP	OAMHC	IS-NR	Standby	-----	1115	XXX-XXX-XXX	E5MCAP	OAMHC	IS-NR	Active	-----
CARD	VERSION	TYPE	GPL	PST	SST	AST																	
1113	XXX-XXX-XXX	E5MCAP	OAMHC	IS-NR	Standby	-----																	
1115	XXX-XXX-XXX	E5MCAP	OAMHC	IS-NR	Active	-----																	
3 <input type="checkbox"/>	<p>Place spare E5-MASP in system.⁶</p> <p>Record the part number for the spare E5-TDM:</p> <p>p/n _____</p>	<input type="checkbox"/> Slide the MASP H/S switch (SW3) on the standby MASP up to the unlocked position (Wait for all drive LEDs to transition to a steady blue).																					
		<input type="checkbox"/> Remove the standby E5-MASP card determined in step 2.																					
		<input type="checkbox"/> Insert the spare E5-MASP card.																					
		<input type="checkbox"/> Slide the MASP H/S switch (SW3) on the new standby MASP down to the locked position (Wait for the MASP H/S LED to transition from blinking blue to off and the MASP to come up in standby mode).																					
		<p>Note: UAMs are generated during this step. An audible alarm is generated.</p> <p>Wait for the new standby MASP to come up in standby mode and system returns to duplex mode.</p>																					
4 <input type="checkbox"/>	Issue the report status command for the standby MASP.	<pre>rept-stat-card:loc=xxxx:mode=full</pre> <p>(Where xxx is the STBY MASP slot from step 2 above)</p>																					
5 <input type="checkbox"/>	Verify that the backup goes to IS-NR	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.X.X-YY.y.y CARD VERSION TYPE GPL PST SST AST xxxx xxx-xxx-xxx E5MCAP OAMHC IS-NR Standby DB-DIFF ALARM STATUS = No Alarms. BLMCAP GPL version = xxx-xxx-xxx IMT BUS A = Conn IMT BUS B = Conn MBD BIP STATUS = Valid MOTHER BOARD ID = E5-MCAP DBD STATUS = Valid DBD TYPE = 1G ENET DBD MEMORY SIZE = 4096M HW VERIFICATION CODE = ---- CURRENT TEMPERATURE = 33C (92F) PEAK TEMPERATURE: = 37C (99F) [13-05-19 08:02] TROUBLE TEXT VER. = ---- IPLNK STATUS IPLNK IPADDR STATUS PST A 192.168.53.89 UP IS-NR Command Completed.</pre>																					

⁶ The spare E5-MASP should be the one verified by upgrade Health Check #2, see section 1.2.1 ref [1].

Procedure 3: Updating the Source-Release Spare Fixed Disk

<p>6</p> <p><input type="checkbox"/></p>	<p>Issue the command to retrieve GPL versions.</p>	<pre>rtrv-gpl</pre>
<p>7</p> <p><input type="checkbox"/></p> <p><input type="checkbox"/></p>	<p>Response from the retrieve command is displayed.</p> <p>Verify correct source release levels.</p> <p>If any of the standby E5-MASP GPLs indicate ALM, it is possible that the fixed disk has not gone through session 2 of the previous upgrade. Stop the procedure and contact My Oracle Support.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y GPL Auditing ON GPL CARD RELEASE APPROVED TRIAL REMOVE TRIAL GGGGGG1 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX ----- GGGGGG1 1116 XXX-XXX-XXX XXX-XXX-XXX ALM XXX-XXX-XXX ----- GGGGGG1 1113 ----- GGGGGG2 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX ----- GGGGGG2 1116 XXX-XXX-XXX XXX-XXX-XXX ALM XXX-XXX-XXX ----- GGGGGG2 1113 ----- GGGGGG3 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX ----- GGGGGG3 1116 XXX-XXX-XXX XXX-XXX-XXX ALM XXX-XXX-XXX ----- GGGGGG3 1113 ----- OAMHC 1114 XXX-XXX-XXX XXX-XXX-XXX ----- OAMHC 1116 XXX-XXX-XXX XXX-XXX-XXX ----- OAMHC 1113 ----- GGGGGG4 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX ----- GGGGGG4 1116 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX ----- GGGGGG4 1113 ----- GGGGGG5 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX ----- GGGGGG5 1116 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX ----- GGGGGG5 1113 ----- GGGGGG6 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX ----- GGGGGG6 1116 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX ----- GGGGGG6 1113 -----</pre> <p>;</p>
<p>8</p> <p><input type="checkbox"/></p>	<p>Issue the command to repair the standby TDM's database.</p>	<pre>chg-db:action=repair</pre> <p>NOTE: The system will need approximately 2 minutes after step 5 to acquire duplex mode. As a result, the system will reject the chg-db command until it is back in duplex mode.</p>
<p>9</p> <p><input type="checkbox"/></p> <p><input type="checkbox"/></p>	<p>Response to the repair command is displayed.</p> <p>Wait for the 'repair complete' message to display and the MASP returns to in-service.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y chg-db:action=repair Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y REPAIR: MASP A - Repair starts on standby MASP. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y REPAIR: MASP A - Repair from fixed disk complete. ;</pre>
<p>10</p> <p><input type="checkbox"/></p>	<p>Place original standby E5-MASP in system.</p>	<p><input type="checkbox"/> Slide the MASP H/S switch (SW3) on the standby MASP up to the unlocked position (Wait for all drive LEDs to transition to a steady blue).</p> <p><input type="checkbox"/> Remove the standby E5-MASP card determined in step 2.</p> <p><input type="checkbox"/> Insert the original standby E5-MASP card.</p> <p><input type="checkbox"/> Slide the MASP H/S switch (SW3) on the original standby MASP down to the locked position (Wait for the MASP H/S LED to transition from blinking blue to off and the MASP to come up in standby mode).</p> <p>Note: UAMs are generated during this step. An audible alarm is generated. Wait for the original standby E5-MASP to come up in standby mode and system returns to duplex mode.</p>

Procedure 4: Verifying All Databases

<p>S T E P #</p>	<p>This procedure verifies that all databases are coherent and at the same level, which includes current and backup partitions on both fixed disks.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR UPGRADE ASSISTANCE.</p>
<p>1 <input type="checkbox"/></p>	<p>Issue the command to display database information.</p> <pre>rept-stat-db:display=all</pre>
<p>2 <input type="checkbox"/></p> <p>Response to the command is displayed.</p> <p>Look in the columns labeled 'C,' 'T,' and 'LEVEL' output by this command.</p> <p><input type="checkbox"/> Verify entries in column 'C' show 'Y', which indicates coherence.</p> <p><input type="checkbox"/> Verify entries in column 'T' show 'N' (backup and RMD may show a dash), which indicates that the database is not in transition.</p> <p><input type="checkbox"/> Verify all entries in the database LEVEL column are the same. LEVEL is a value, which varies depending on the system.</p> <p><input type="checkbox"/> If the STDBY databases are not coherent or at the correct level, repeat Procedure 3, step 8.</p> <p><input type="checkbox"/> Verify that the MPS databases are coherent.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y DATABASE STATUS: >> OK << TDM 1114 (STDBY) TDM 1116 (ACTV) C LEVEL TIME LAST BACKUP C LEVEL TIME LAST BACKUP ----- FD BKUP Y YY YY-MM-DD hh:mm:ss TTTT Y 1 - - FD CRNT Y XXX - - - Y XXX - - MCAP 1113 MCAP 1115 ----- RD BKUP - - - - Y 1 - - USB BKP - - - - - - - - CARD/APPL LOC C T LEVEL TIME LAST UPDATE EXCEPTION ----- SS7HC 1101 Y N XXX YY-MM-DD HH:MM:SS - IPLHC 1103 Y N XXX YY-MM-DD HH:MM:SS - VSCCP 1104 Y N XXX YY-MM-DD HH:MM:SS - ERTHC 1105 Y N XXX YY-MM-DD HH:MM:SS - MCP 1107 Y N XXX YY-MM-DD HH:MM:SS - GLS 1108 Y N XXX YY-MM-DD HH:MM:SS - IPSHC 1111 Y N XXX YY-MM-DD HH:MM:SS - OAM-RMV 1113 - - - - - - TDM-CRNT 1114 Y N XXX YY-MM-DD hh:mm:ss - TDM-BKUP 1114 Y - YYY YY-MM-DD hh:mm:ss - OAM-RMV 1115 Y - 1 00-00-00 00:00:00 DIFF LEVEL OAM-USB 1115 - - - - - - TDM-CRNT 1116 Y N XXX YY-MM-DD hh:mm:ss - TDM-BKUP 1116 Y - YYY YY-MM-DD hh:mm:ss - ELAP A (STDBY) C BIRTHDATE LEVEL EXCEPTION ----- RTDB Y YY-MM-DD hh:mm:ss ZZZZZZZ - RTDB-EAGLE Y YY-MM-DD hh:mm:ss ZZZZZZZ - ELAP B (ACTV) C BIRTHDATE LEVEL EXCEPTION ----- RTDB Y YY-MM-DD hh:mm:ss ZZZZZZZ - RTDB-EAGLE Y YY-MM-DD hh:mm:ss ZZZZZZZ - EAGLE RTDB REPORT CARD/APPL LOC C BIRTHDATE LEVEL EXCEPTION IN-SRVC ----- VSCCP 1104 Y YY-MM-DD hh:mm:ss ZZZZZZZ - Dd Hh Mm</pre>

Procedure 5: Initializing MASPs to Run on Target-Release GPLs

S T E P #	<p>This procedure loads the target-release GPL to both MASPs. This procedure requires that both MASPs be rebooted (one at a time) and verified as running the target-release GPLs.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR UPGRADE ASSISTANCE.</p>
1 <input type="checkbox"/>	<p>Remove the USB flash drives from E5-MASPs.</p> <p>Note: the target-release is assumed to have been downloaded to the inactive partition prior to the execution of this procedure (see section 4.2.)</p>
2 <input type="checkbox"/>	<p>Inhibit the standby MASP</p> <p>INH-CARD : LOC=XXXX</p> <p>(Where XXXX is the location of the standby MASP slot recorded in Procedure 3, Step 2)</p>
3 <input type="checkbox"/> <input type="checkbox"/>	<p>Response to the inhibit command is displayed</p> <pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y card is inhibited. ;</pre> <p>Verify UAM 514 is displayed.</p> <pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Upg Phase x ** 5045.0514 ** CARD XXXX OAMHC Standby MASP is inhibited ;</pre> <p>Note: Wait for the card to boot and return to the IMT bus.</p>
4 <input type="checkbox"/>	<p>Download target-release flash to the standby MASP.</p> <p>INIT-FLASH : LOC=XXXX : CODE=TRIAL</p> <p>(Where XXXX is the location used in the previous command)</p>
5 <input type="checkbox"/> <input type="checkbox"/>	<p>Response to flash initialization is shown.</p> <pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y FLASH Memory Download for card xxxx started. ;</pre> <p>Verify UAM 0004 is displayed.</p> <pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y FLASH Memory Download for card xxxx completed. ;</pre> <pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y 8003.0004 * GPL SYSTEM BLMCAP Card is running non-activated GPL ;</pre> <p>Note: Wait for card to boot and return to the IMT bus.</p>
6 <input type="checkbox"/>	<p>Retrieve the GPLs running on the card location.</p> <p>REPT-STAT-GPL : LOC=XXXX</p> <p>(Where XXXX is the location used in the previous command)</p>
7 <input type="checkbox"/>	<p>Response to the card status command is displayed.</p> <pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y GPL CARD RUNNING APPROVED TRIAL OAMHC 1113 ----- BLMCAP YYY-YYY-YYY ALM+ XXX-XXX-XXX YYY-YYY-YYY ;</pre> <p>Command Completed.</p> <p>The card should be running the trial version of the GPL. If the approved and trial versions are the same no ALM will be present.</p>
8 <input type="checkbox"/>	<p>Run the target-release GPL on the standby MASP</p> <p>ALW-CARD : LOC=XXXX : CODE=INACTIVEPRTN (target release on the inactive partition)</p> <p>(Where XXXX is the location of the standby MASP used in the previous command)</p>
9 <input type="checkbox"/>	<p>Response to allow-card command is shown.</p> <pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Card has been allowed. ;</pre>
10 <input type="checkbox"/>	<p>Retrieve status of the MASPs</p> <p>REPT-STAT-GPL : GPL=OAMHC</p>

Procedure 5: Initializing MASPs to Run on Target-Release GPLs

<input type="checkbox"/>	<p>Verify standby MASP running target release GPL. The standby MASP will display ALM to indicate that the card is not running the approved version GPL.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y GPL Auditing ON GPL CARD RUNNING APPROVED TRIAL OAMHC 1113 XXX-XXX-XXX XXX-XXX-XXX OAMHC 1115 YYY-YYY-YYY ALM XXX-XXX-XXX Command Completed.</pre>
<input type="checkbox"/>	<p>Perform an OAM role change by booting the active MASP.</p>	<p>INIT-CARD:LOC=XXXX</p> <p>(Where XXXX is the location of the active MASP recorded in Procedure 3, Step 2)</p>
<input type="checkbox"/>	<p>Response to card initialization is shown.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Init Card command issued to card xxxx</pre>
<input type="checkbox"/>	<p>Issue the command to log back in to the system.</p>	<p>LOGIN:UID=XXXXXX</p> <p>(Where XXXXXX is a valid login ID)</p>
<input type="checkbox"/> <input type="checkbox"/>	<p>Response to login command is displayed.</p> <p>Ignore any login failure message.</p> <p>Verify the Upgrade Phase in Banner⁷.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Upg Phase 0 User logged in on terminal UU. ? Login failures since last successful LOGIN Last successful LOGIN was on port ? on ??-??-?? @ ??:?:??</pre>
<input type="checkbox"/>	<p>Echo command input to capture terminal.</p>	<p>ACT-ECHO:TRM=P</p> <p>(Where P is the terminal port number specified in Procedure 1, Step 3)</p>
<input type="checkbox"/>	<p>Response to print capture command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Upg Phase x Scroll Area Output will be echoed to Port P.</pre>
<input type="checkbox"/>	<p>Issue the card status to verify the location of the active MASP slot</p>	<p>REPT-STAT-CARD:APPL=OAM</p>
<input type="checkbox"/> <input type="checkbox"/>	<p>Response to the card status command is displayed.</p> <p>Circle the status of both E5-MASPs:</p> <p>1113: Active or Standby</p> <p>1115: Active or Standby</p> <p>For this sample output, 1113 is active and 1115 is standby.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y CARD VERSION TYPE GPL PST SST AST 1113 XXX-XXX-XXX E5MCAP OAMHC IS-NR Active ---- 1115 XXX-XXX-XXX E5MCAP OAMHC IS-NR Standby ---- Command Completed.</pre>
<input type="checkbox"/>	<p>Inhibit the standby MASP</p>	<p>INH-CARD:LOC=XXXX</p> <p>(Where XXXX is the location of the standby MASP identified in the previous command)</p>

⁷ Phase number is not displayed at this point for incremental upgrades. See section 0 for a definition of incremental upgrade and section 1.4 for a definition of database versioning. Database versioning between releases is determined in Procedure 7, step 2.

Procedure 5: Initializing MASPs to Run on Target-Release GPLs

<p>21</p> <p><input type="checkbox"/></p> <p><input type="checkbox"/></p>	<p>Response to the inhibit command is displayed</p> <p>Verify UAM 514 is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Card is inhibited. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Upg Phase x ** 5045.0514 ** CARD XXXX OAMHC Standby MASP is inhibited ;</pre> <p>Note: Wait for the card to boot and return to the IMT bus.</p>
<p>22</p> <p><input type="checkbox"/></p>	<p>Download target release flash to the standby MASP.</p>	<p>INIT-FLASH:LOC=XXXX:CODE=TRIAL</p> <p>(Where XXXX is the location of the standby MASP used in the previous command)</p>
<p>23</p> <p><input type="checkbox"/></p>	<p>Response to flash initialization is shown.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y FLASH Memory Download for card xxxx started. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y FLASH Memory Download for card xxxx completed. ;</pre> <p>Note: Wait for card to boot and return to the IMT bus.</p>
<p>24</p> <p><input type="checkbox"/></p>	<p>Retrieve the GPLs running on the card location.</p>	<p>REPT-STAT-GPL:LOC=XXXX</p> <p>(Where XXXX is the location of the standby MASP slot used in the previous command)</p>
<p>25</p> <p><input type="checkbox"/></p>	<p>Response to the card status command is displayed.</p> <p>The card should be running the trial version of the GPL. If the approved and trial versions are the same no ALM will be present.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y GPL CARD RUNNING APPROVED TRIAL OAMHC 1115 BLMCAP YYY-YYY-YYY ALM+ XXX-XXX-XXX YYY-YYY-YYY ; Command Completed.</pre>
<p>26</p> <p><input type="checkbox"/></p>	<p>Run the target release GPL on the standby MASP</p>	<p>ALW-CARD:LOC=XXXX:CODE=INACTIVEPRTN (target release on the inactive partition)</p> <p>(Where XXXX is the location of the standby MASP used in the previous command)</p>
<p>27</p> <p><input type="checkbox"/></p>	<p>Response to allow card command is shown.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Card has been allowed. ;</pre>
<p>28</p> <p><input type="checkbox"/></p>	<p>Issue the command to display the status of the MASPs' GPL</p>	<p>REPT-STAT-GPL:GPL=OAMHC</p>
<p>29</p> <p><input type="checkbox"/></p> <p><input type="checkbox"/></p>	<p>Response from the retrieve command is displayed.</p> <p>Verify that the GPL versions that are displayed in the "RUNNING" column are correct; see section 1.3</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y GPL Auditing ON APPL CARD RUNNING APPROVED TRIAL OAMHC 1113 XXX-XXX-XXX ALM YYY-YYY-YYY XXX-XXX-XXX * OAMHC 1115 XXX-XXX-XXX ALM YYY-YYY-YYY XXX-XXX-XXX * ; Command Completed.</pre>
<p>30</p> <p><input type="checkbox"/></p>	<p>If GPLs are not correct, do the following:</p>	<ol style="list-style-type: none"> Repeat Step 2 - 29. Contact My Oracle Support.

Procedure 5: Initializing MASPs to Run on Target-Release GPLs

<p>31 <input type="checkbox"/></p>	<p>Issue the command to display the version of the Flash GPL running on card 1113.</p>	<p>REPT-STAT-CARD:LOC=1113:MODE=FULL</p>
<p>32 <input type="checkbox"/> <input type="checkbox"/></p>	<p>Response from the retrieve command is displayed.</p> <p>Record version of BLMCAP running on E5-MASP.</p> <p>GPL Version: _____</p> <p>GPL Version: _____</p>	<pre> eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y CARD VERSION TYPE GPL PST SST AST 1113 XXX-XXX-XXX E5MCAP OAMHC IS-NR Standby ----- ALARM STATUS = No Alarms. BLMCAP GPL version = YYY-YYY-YYY IMT BUS A = Conn IMT BUS B = Conn CLOCK A = Active CLOCK B = Idle CLOCK I = Idle MBD BIP STATUS = Valid MOTHER BOARD ID = E5-MCAP DBD STATUS = Valid DBD TYPE = 1G ENET DBD MEMORY SIZE = 4096M HW VERIFICATION CODE = ---- TROUBLE TEXT VER. = ---- IPLNK STATUS IPLNK IPADDR STATUS PST A 192.168.53.89 UP IS-NR Command Completed. ; </pre>
<p>33 <input type="checkbox"/></p>	<p>Repeat steps 31 – 32, for location 1115.</p>	

Procedure 6: Verifying the Target Release and Software Access Key

S T E P #	<p>This procedure verifies that the Upgrade Software Access Key has been entered.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR UPGRADE ASSISTANCE.</p>	
1 <input type="checkbox"/>	<p>Validate the Software Access Key with the upgrade target release.</p>	<p>ACT-UPGRADE:ACTION=CHKREL:SRC=FIXED</p>
2 <input type="checkbox"/> <input type="checkbox"/>	<p>Response from the software validation.</p> <p>Verify the Upgrade target release is correct. For pre-46.1 release, verify the Software Access Key is valid. SAK is not used from release 46.1 forward.</p> <p>If either the upgrade target release is incorrect or the Software Access Key is invalid STOP the upgrade and contact My Oracle Support.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y act-upgrade:action=chkrel:src=zzzz Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Upgrade target: EAGLE XX.x.x-YY.y.y Software Access Key valid for target release Copy Release data to ramdisk. Validate Release data on ramdisk. Eagle Release successfully validated. Command Complete : Upgrade action completed successfully ;</pre>

5.2 OAM Conversion

Procedure 7: Verifying all Databases

<p>S T E P #</p>	<p>This procedure verifies that all of the fixed disk's database partitions have not been converted and are still coherent and at the same level.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR UPGRADE ASSISTANCE.</p>
<p>1 <input type="checkbox"/></p>	<p>Issue the command to display database status during upgrades.</p> <p>ACT-UPGRADE:ACTION=DBSTATUS</p>
<p>2 <input type="checkbox"/></p> <p>Response to the command is displayed.</p> <p>Look in the columns labeled 'C', 'T', and 'LEVEL' output by this command.</p> <p>Verify entries in column 'C' show 'Y', which indicates coherence or '-'. <input type="checkbox"/></p> <p>Verify column 'T' shows 'N' for both CRNT databases, which indicates that those databases are not in transition <input type="checkbox"/></p> <p>Or if target release is on the inactive partition, the database level is "1". <input type="checkbox"/></p> <p>Verify all entries in the database 'Level' column marked as 'XXX' are the same. <input type="checkbox"/></p> <p>Verify that the version numbers displayed are correct.⁸ <input type="checkbox"/></p>	<pre> DATABASE STATUS: >> OK << TDM 1114 (STDBY) C LEVEL TIME LAST BACKUP ----- FD BKUP Y XXX YY-MM-DD hh:mm:ss TTTT FD CRNT Y XXX YY-MM-DD hh:mm:ss TTTT MCAP 1113 MCAP 1115 RD BKUP - - - - USB BKP - - - - CARD/APPL LOC C T LEVEL TIME LAST UPDATE VERSION STATUS ----- OAM-RMV 1113 - - - - - - TDM-CRNT 1114 Y N XXX YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL TDM-BKUP 1114 Y - XXX YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL OAM-RMV 1115 - - - - - - OAM-USB 1115 - - - - - - TDM-CRNT 1116 Y N XXX YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL TDM-BKUP 1116 Y - XXX YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL INACTIVE PARTITION GROUP CARD/APPL LOC C T LEVEL TIME LAST UPDATE VERSION STATUS ----- TDM-CRNT 1114 Y - 1 YY-MM-DD hh:mm:ss ZZZ-ZZZ-ZZZ NORMAL TDM-BKUP 1114 Y - 1 YY-MM-DD hh:mm:ss ZZZ-ZZZ-ZZZ NORMAL TDM-CRNT 1116 Y - 1 YY-MM-DD hh:mm:ss ZZZ-ZZZ-ZZZ NORMAL TDM-BKUP 1116 Y - 1 YY-MM-DD hh:mm:ss ZZZ-ZZZ-ZZZ NORMAL </pre>
<p>3 <input type="checkbox"/></p>	<p>Issue the command to retrieve the upgrade configuration</p> <p>rtrv-upgrade-config</p>
<p>4 <input type="checkbox"/></p> <p>Response to the retrieve command is displayed.</p> <p>If target release is 46.0 or 45.x, verify that SAK is set. . <input type="checkbox"/></p> <p>The Threshold Type will be GROUP, SYSTEM, or SET. <input type="checkbox"/></p>	<pre> eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase x Software Access Key entered on system : vbsevncea7vy5 Configured Upgrade Threshold Type: SET Number of SERVICE Sets: X Number of LINK Sets: Y Command Completed. </pre> <p>Note: Refer to 6.4B.2 to configure the Card Set network conversion method.</p>

⁸ See section 1.4 to verify the database versions. If the database versions are the same for the TDMs as well as the RMD, the phase indicator is not displayed until after Procedure 8, step 1.

Procedure 8: STP Conversion

S T E P #	<p>This begins the actual STP conversion process. This procedure begins during Upgrade Phase 0 and ends as part of Upgrade Phase 3. See recommendation #5 in section 1.6 before executing this procedure.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>If the upgrade execution terminates before successfully completing, see recommendation #7 in 1.6</p> <p>SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR UPGRADE ASSISTANCE.</p>	
1 <input type="checkbox"/>	<p>Issue the command to begin database conversion.</p> <p>Note that the duration of this command is dependent on the size of the database and the size of the network configuration.</p> <p>Table 18. Act Upgrade Command Actions lists the actions completed by the command.</p> <p>Appendix D contains messages illustrative of the output of upgrade during this series of operations.</p>	<p>If the threshold type is set to SET in Procedure 7, Step 4 issue the following command:</p> <p>ACT-UPGRADE:ACTION=CONVERTSTP:SRC=FIXED</p> <p>If the threshold type is set to GROUP or SYSTEM in Procedure 7, Step 4, issue the following command:</p> <p>ACT-UPGRADE:ACTION=CONVERTSTP:SRC=FIXED:THRES=75</p>

Table 18. Act Upgrade Command Actions

Fixed workspace	
A	OAM based measurements are inhibited.
B	N/A
C	The standby disk is formatted based on the target release configuration table.
D	The target release GPLs are copied onto the standby TDM.
E	The existing database is converted onto the standby disk, upgrading the existing EAGLE source-release tables to target-release tables.
F	The standby MASP boots automatically.
G	The active MASP then boots allowing the standby to resume the active role. ⁹
H	The standby disk is formatted based on the target release configuration table.
I	The target release GPLs are copied onto the standby TDM.
J	The existing database is converted onto the standby disk, upgrading the existing EAGLE source-release tables to target-release tables.
K	The standby MASP boots automatically.
L	Initialization of Network cards.

⁹ Proceed to step 3 to log back into the system and restart output capture.

Procedure 8: STP Conversion

<p><input type="checkbox"/> 2</p> <p><input type="checkbox"/></p> <p><input type="checkbox"/></p> <p><input type="checkbox"/></p>	<p>Command is displayed.</p> <p>Note the banners transitions from Phase 0 to Phase 3.</p> <p>For incremental upgrade, see footnote ¹⁰</p> <p>Completion notice of successful upgrade. If upgrade does not complete successfully, see recommendation # 7 in section 1.6</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST Rel XX.x.x-XX.x.x Upg Phase 0 act-upgrade:action=convertstp:thres=XX Command entered at terminal #10. ;</pre> <p>NOTICE: One of the following messages will be output at the start of the upgrade process to indicate which workspace (fixed or removable) has been selected by the system for OAM conversion:</p> <pre>eaglestp YY-MM-DD hh:mm:ss EST Rel XX.x.x-XX.x.x Upg Phase 0 using inactive standby partitions for OAM conversion (disk=dddd) ;</pre> <p>(Where <i>dddd</i> defines conversion workspace)</p> <p>NOTICE: See Appendix D (D.1) for samples of output messages.</p> <pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Upg Phase 3 Command Complete : Upgrade action completed successfully ;</pre> <p>NOTE: If upgrade terminates abnormally in phase 3 due to cards being in IS-ANR DDL Hunt, contact My Oracle Support for assistance in executing Appendix D (D.2).</p>
<p><input type="checkbox"/> 3</p>	<p>After item G in step 1, issue the command to log back in to the system.</p>	<p>LOGIN:UID=XXXXXX</p> <p>(Where <i>XXXXXX</i> is a valid login ID)</p>
<p><input type="checkbox"/> 4</p>	<p>Response to login command is displayed.</p> <p>Ignore any login failure message.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Upg Phase x User logged in on terminal 10. ;</pre> <p>? Login failures since last successful LOGIN Last successful LOGIN was on port ? on ??-??-?? @ ??:??:??</p>
<p><input type="checkbox"/> 5</p>	<p>Issue the command to reactivate printer capture of upgrade process.</p>	<p>ACT-ECHO:TRM=P</p> <p>(Where <i>P</i> is the terminal port number specified in Procedure 1, Step 3)</p>
<p><input type="checkbox"/> 6</p>	<p>Response to print capture command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Upg Phase x Scroll Area Output will be echoed to Port P. ;</pre>

¹⁰ Software troubles from the DMS_LOCK.C module may be generated, for incremental upgrade only, while GPLs are being copied. These software troubles are not expected but, if they occur in this circumstance, they are not service affecting.

Procedure 8: STP Conversion

<p>7</p> <p><input type="checkbox"/></p>	<p>Issue the command to display database status during upgrades.</p>	<p>ACT-UPGRADE:ACTION=DBSTATUS</p>
<p>8</p> <p><input type="checkbox"/></p> <p><input type="checkbox"/></p> <p><input type="checkbox"/></p> <p><input type="checkbox"/></p> <p><input type="checkbox"/></p>	<p>Response from the command is displayed.</p> <p>Look in the columns labeled 'C', 'LEVEL' and 'VERSION STATUS' output by this command.</p> <p>Verify entries in column 'C' show 'Y' which indicates coherence or '-'. Verify both 'FD CRNT' Levels are equal. Verify 'VERSION STATUS' shows NORMAL in the active partition group. NOTE: this will not occur until step 2 above is completed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Upg Phase x DATABASE STATUS: >> OK << TDM 1114 (STDBY) C LEVEL TIME LAST BACKUP C LEVEL TIME LAST BACKUP FD BKUP Y XXX YY-MM-DD hh:mm:ss TTTT Y XXX YY-MM-DD hh:mm:ss TTTT FD CRNT Y XXX YY-MM-DD hh:mm:ss TTTT Y XXX YY-MM-DD hh:mm:ss TTTT MCAP 1113 MCAP 1115 RD BKUP - - - - - USB BKP - - - - - CARD/APPL LOC C T LEVEL TIME LAST UPDATE VERSION STATUS OAM-RMV 1113 - - - - - TDM-CRNT 1114 Y N XXX YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL TDM-BKUP 1114 Y - XXX YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL OAM-RMV 1115 - - - - - OAM-USB 1115 - - - - - TDM-CRNT 1116 Y N XXX YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL TDM-BKUP 1116 Y - XXX YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL INACTIVE PARTITION GROUP CARD/APPL LOC C T LEVEL TIME LAST UPDATE VERSION STATUS TDM-CRNT 1114 Y - ZZZ YY-MM-DD hh:mm:ss ZZZ-ZZZ-ZZZ UPG 3 TDM-BKUP 1114 Y - ZZZ YY-MM-DD hh:mm:ss ZZZ-ZZZ-ZZZ UPG 3 TDM-CRNT 1116 Y - ZZZ YY-MM-DD hh:mm:ss ZZZ-ZZZ-ZZZ UPG 3 TDM-BKUP 1116 Y - ZZZ YY-MM-DD hh:mm:ss ZZZ-ZZZ-ZZZ UPG 3</pre>
<p>9</p> <p><input type="checkbox"/></p>	<p>Issue the report card status command to verify network cards.</p>	<p>REPT-STAT-CARD</p>
<p>10</p> <p><input type="checkbox"/></p> <p><input type="checkbox"/></p> <p><input type="checkbox"/></p>	<p>Response to the card status command is displayed.</p> <p>Verify that the cards are IS-NR, OOS-MT Isolated or OOS-MT-DSBLD. Verify that the GPL versions that are displayed in the "VERSION" column are correct; see Section 1.3.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Upg Phase x CARD VERSION TYPE APPL PST SST AST 1101 XXX-XXX-XXX DSM SCCPHC IS-NR Active ----- 1102 XXX-XXX-XXX DSM SCCPHC IS-NR Active ----- 1103 XXX-XXX-XXX TSM GLSHC IS-NR Active ----- 1104 XXX-XXX-XXX TSM GLSHC IS-NR Active ----- 1105 XXX-XXX-XXX LIMDS0 SS7ML IS-NR Active ----- 1111 XXX-XXX-XXX IPSM IPSHC OOS-MT Isolated ----- 1113 XXX-XXX-XXX E5MCAP OAMHC IS-NR Active ----- 1114 ----- E5TDM ----- IS-NR Active ----- 1115 XXX-XXX-XXX E5MCAP OAMHC IS-NR Standby ----- 1116 ----- E5TDM ----- IS-NR Active ----- 1117 ----- E5MDAL ----- IS-NR Active ----- 1201 XXX-XXX-XXX LIMDS0 SS7ML IS-NR Active ----- 1202 XXX-XXX-XXX LIMDS0 SS7ML IS-NR Active ----- 1203 XXX-XXX-XXX LIMT1 SS7ML IS-NR Active ----- 1204 XXX-XXX-XXX LIMT1 SS7HC IS-NR Active ----- 1205 XXX-XXX-XXX DCM SS7IPGW IS-NR Active ----- 1207 XXX-XXX-XXX DCM IPGWI IS-NR Active ----- 1211 XXX-XXX-XXX LIMDS0 MPLGA IS-NR Active ----- 1215 xxx-xxx-xxx DSM SCCPHC IS-NR Active ----- 1217 xxx-xxx-xxx DSM SCCPHC IS-NR Active ----- 3101 xxx-xxx-xxx LIMATM ATMANSI IS-NR Active ----- 3102 xxx-xxx-xxx LIMATM ATMANSI IS-NR Active ----- Command Completed.</pre>

Procedure 8: STP Conversion

<p>11 <input type="checkbox"/></p>	<p>Issue the command to display GPL status.</p>	<p>RTRV-GPL</p>																																																																																																																																				
<p>12 <input type="checkbox"/></p>	<p>Response from the retrieve command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y GPL Auditing ON</pre>																																																																																																																																				
<p><input type="checkbox"/></p>	<p>Verify that the GPL versions that are displayed in the "RELEASE" column are correct; see Section 1.3</p>	<table border="1"> <thead> <tr> <th>GPL</th> <th>CARD</th> <th>RELEASE</th> <th>APPROVED</th> <th>TRIAL</th> <th>REMOVE TRIAL</th> </tr> </thead> <tbody> <tr> <td>GGGGGG1</td> <td>1114</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>-----</td> </tr> <tr> <td>GGGGGG1</td> <td>1116</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>-----</td> </tr> <tr> <td>GGGGGG1</td> <td>1113</td> <td>-----</td> <td>-----</td> <td>-----</td> <td>-----</td> </tr> <tr> <td>GGGGGG2</td> <td>1114</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>-----</td> </tr> <tr> <td>GGGGGG2</td> <td>1116</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>-----</td> </tr> <tr> <td>GGGGGG2</td> <td>1113</td> <td>-----</td> <td>-----</td> <td>-----</td> <td>-----</td> </tr> <tr> <td>GGGGGG3</td> <td>1114</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>-----</td> </tr> <tr> <td>GGGGGG3</td> <td>1116</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>-----</td> </tr> <tr> <td>GGGGGG3</td> <td>1113</td> <td>-----</td> <td>-----</td> <td>-----</td> <td>-----</td> </tr> <tr> <td>OAMHC</td> <td>1114</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>-----</td> <td>-----</td> </tr> <tr> <td>OAMHC</td> <td>1116</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>-----</td> <td>-----</td> </tr> <tr> <td>OAMHC</td> <td>1113</td> <td>-----</td> <td>-----</td> <td>-----</td> <td>-----</td> </tr> <tr> <td>GGGGGG4</td> <td>1114</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>-----</td> </tr> <tr> <td>GGGGGG4</td> <td>1116</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>-----</td> </tr> <tr> <td>GGGGGG4</td> <td>1113</td> <td>-----</td> <td>-----</td> <td>-----</td> <td>-----</td> </tr> <tr> <td>GGGGGG5</td> <td>1114</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>-----</td> </tr> <tr> <td>GGGGGG5</td> <td>1116</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>-----</td> </tr> <tr> <td>GGGGGG5</td> <td>1113</td> <td>-----</td> <td>-----</td> <td>-----</td> <td>-----</td> </tr> <tr> <td>GGGGGG6</td> <td>1114</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>-----</td> </tr> <tr> <td>GGGGGG6</td> <td>1116</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>-----</td> </tr> <tr> <td>GGGGGG6</td> <td>1113</td> <td>-----</td> <td>-----</td> <td>-----</td> <td>-----</td> </tr> </tbody> </table> <p>;</p>	GPL	CARD	RELEASE	APPROVED	TRIAL	REMOVE TRIAL	GGGGGG1	1114	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----	GGGGGG1	1116	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----	GGGGGG1	1113	-----	-----	-----	-----	GGGGGG2	1114	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----	GGGGGG2	1116	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----	GGGGGG2	1113	-----	-----	-----	-----	GGGGGG3	1114	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----	GGGGGG3	1116	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----	GGGGGG3	1113	-----	-----	-----	-----	OAMHC	1114	XXX-XXX-XXX	XXX-XXX-XXX	-----	-----	OAMHC	1116	XXX-XXX-XXX	XXX-XXX-XXX	-----	-----	OAMHC	1113	-----	-----	-----	-----	GGGGGG4	1114	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----	GGGGGG4	1116	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----	GGGGGG4	1113	-----	-----	-----	-----	GGGGGG5	1114	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----	GGGGGG5	1116	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----	GGGGGG5	1113	-----	-----	-----	-----	GGGGGG6	1114	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----	GGGGGG6	1116	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----	GGGGGG6	1113	-----	-----	-----	-----
GPL	CARD	RELEASE	APPROVED	TRIAL	REMOVE TRIAL																																																																																																																																	
GGGGGG1	1114	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----																																																																																																																																	
GGGGGG1	1116	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----																																																																																																																																	
GGGGGG1	1113	-----	-----	-----	-----																																																																																																																																	
GGGGGG2	1114	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----																																																																																																																																	
GGGGGG2	1116	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----																																																																																																																																	
GGGGGG2	1113	-----	-----	-----	-----																																																																																																																																	
GGGGGG3	1114	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----																																																																																																																																	
GGGGGG3	1116	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----																																																																																																																																	
GGGGGG3	1113	-----	-----	-----	-----																																																																																																																																	
OAMHC	1114	XXX-XXX-XXX	XXX-XXX-XXX	-----	-----																																																																																																																																	
OAMHC	1116	XXX-XXX-XXX	XXX-XXX-XXX	-----	-----																																																																																																																																	
OAMHC	1113	-----	-----	-----	-----																																																																																																																																	
GGGGGG4	1114	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----																																																																																																																																	
GGGGGG4	1116	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----																																																																																																																																	
GGGGGG4	1113	-----	-----	-----	-----																																																																																																																																	
GGGGGG5	1114	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----																																																																																																																																	
GGGGGG5	1116	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----																																																																																																																																	
GGGGGG5	1113	-----	-----	-----	-----																																																																																																																																	
GGGGGG6	1114	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----																																																																																																																																	
GGGGGG6	1116	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	-----																																																																																																																																	
GGGGGG6	1113	-----	-----	-----	-----																																																																																																																																	

5.3 Completion of Session 1

Procedure 9: Completing Upgrade/Return to Full-Function Mode

S T E P #	This procedure completes the upgrade and returns the system to full-function mode. Verification of the GPL distribution is also performed.																																																																																																																																											
	Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.																																																																																																																																											
SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR UPGRADE ASSISTANCE.																																																																																																																																												
<input type="checkbox"/> 1	Issue the command to initialize both MASPs.	INIT-CARD:APPL=OAM																																																																																																																																										
<input type="checkbox"/> 2	Response to the init command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Upgrade Phase x init-card:appl=oam Command entered at terminal #10. ;</pre>																																																																																																																																										
<input type="checkbox"/>	Verify the banner display full-function mode after the MASPs boot.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y 0002.0009 CARD 1113 OAMHC MASP became active ;</pre>																																																																																																																																										
<input type="checkbox"/> 3	Issue the command to log back in to the system.	LOGIN:UID=XXXXXX (Where XXXXXX is a valid login ID)																																																																																																																																										
<input type="checkbox"/> 4	Response to login command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y User logged in on terminal 10. ;</pre>																																																																																																																																										
<input type="checkbox"/> 5	Issue the command to reactivate printer capture.	ACT-ECHO:TRM=P (Where P is the terminal port number specified in Procedure 1, Step 4)																																																																																																																																										
<input type="checkbox"/> 6	Response to printer capture command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y act-echo:trm=X Command entered at terminal #10. ;</pre>																																																																																																																																										
<input type="checkbox"/> 7	Issue the command to display card status.	REPT-STAT-GPL:DISPLAY=ALL																																																																																																																																										
<input type="checkbox"/> 8	Response to GPL status command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y GPL Auditing ON</pre>																																																																																																																																										
<input type="checkbox"/>	Verify that no "ALM" indicator is displayed.	<table border="0"> <thead> <tr> <th>GPL</th> <th>CARD</th> <th>RUNNING</th> <th>APPROVED</th> <th>TRIAL</th> <th></th> </tr> </thead> <tbody> <tr> <td>OAMHC</td> <td>1113</td> <td>XXX-XXX-XXX ALM</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>*</td> </tr> <tr> <td></td> <td>BLMCAP</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td></td> </tr> <tr> <td>OAMHC</td> <td>1115</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>*</td> </tr> <tr> <td></td> <td>BLMCAP</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td></td> </tr> <tr> <td>ATMHC</td> <td>1206</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td></td> </tr> <tr> <td></td> <td>BLIXP</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td></td> </tr> <tr> <td>HIPR2</td> <td>1209</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td></td> </tr> <tr> <td>HIPR2</td> <td>1210</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td></td> </tr> <tr> <td>HIPR</td> <td>1109</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td></td> </tr> <tr> <td>HIPR</td> <td>1110</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td></td> </tr> <tr> <td>SS7HC</td> <td>1201</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td></td> </tr> <tr> <td></td> <td>BLIXP</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td></td> </tr> <tr> <td>SS7HC</td> <td>1202</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td></td> </tr> <tr> <td></td> <td>BLIXP</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td></td> </tr> <tr> <td>GLSHC</td> <td>1213</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td></td> </tr> <tr> <td></td> <td>BLIXP</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td></td> </tr> <tr> <td>GLSHC</td> <td>1214</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td></td> </tr> <tr> <td></td> <td>BLIXP</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td></td> </tr> <tr> <td>SCCPHC</td> <td>1107</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td></td> </tr> <tr> <td></td> <td>BLIXP</td> <td>XXX-XXX-XXX ALM</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td></td> </tr> <tr> <td>SCCPHC</td> <td>1111</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td></td> </tr> <tr> <td></td> <td>BLIXP</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td>XXX-XXX-XXX</td> <td></td> </tr> </tbody> </table>	GPL	CARD	RUNNING	APPROVED	TRIAL		OAMHC	1113	XXX-XXX-XXX ALM	XXX-XXX-XXX	XXX-XXX-XXX	*		BLMCAP	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX		OAMHC	1115	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	*		BLMCAP	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX		ATMHC	1206	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX			BLIXP	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX		HIPR2	1209	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX		HIPR2	1210	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX		HIPR	1109	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX		HIPR	1110	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX		SS7HC	1201	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX			BLIXP	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX		SS7HC	1202	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX			BLIXP	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX		GLSHC	1213	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX			BLIXP	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX		GLSHC	1214	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX			BLIXP	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX		SCCPHC	1107	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX			BLIXP	XXX-XXX-XXX ALM	XXX-XXX-XXX	XXX-XXX-XXX		SCCPHC	1111	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX			BLIXP	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	
GPL	CARD	RUNNING	APPROVED	TRIAL																																																																																																																																								
OAMHC	1113	XXX-XXX-XXX ALM	XXX-XXX-XXX	XXX-XXX-XXX	*																																																																																																																																							
	BLMCAP	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX																																																																																																																																								
OAMHC	1115	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX	*																																																																																																																																							
	BLMCAP	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX																																																																																																																																								
ATMHC	1206	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX																																																																																																																																								
	BLIXP	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX																																																																																																																																								
HIPR2	1209	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX																																																																																																																																								
HIPR2	1210	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX																																																																																																																																								
HIPR	1109	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX																																																																																																																																								
HIPR	1110	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX																																																																																																																																								
SS7HC	1201	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX																																																																																																																																								
	BLIXP	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX																																																																																																																																								
SS7HC	1202	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX																																																																																																																																								
	BLIXP	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX																																																																																																																																								
GLSHC	1213	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX																																																																																																																																								
	BLIXP	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX																																																																																																																																								
GLSHC	1214	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX																																																																																																																																								
	BLIXP	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX																																																																																																																																								
SCCPHC	1107	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX																																																																																																																																								
	BLIXP	XXX-XXX-XXX ALM	XXX-XXX-XXX	XXX-XXX-XXX																																																																																																																																								
SCCPHC	1111	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX																																																																																																																																								
	BLIXP	XXX-XXX-XXX	XXX-XXX-XXX	XXX-XXX-XXX																																																																																																																																								
<input type="checkbox"/> 9	Establish system status	See recommendation # 7 in Section 1.6																																																																																																																																										

Procedure 10: Backing up Converted Database

S T E P #	<p>This procedure backs up the converted Target-Release database to the fixed disk and to either the removable media or the DB FTP server if provisioned. Verification of the converted database is also done.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR UPGRADE ASSISTANCE.</p>
1 <input type="checkbox"/>	<p>If the target release was on the RMD, insert the target-release RMD. Then go to step 10</p> <p>If a source-release RMD is available and the target release was on the inactive partition, insert the RMD¹¹, and continue</p> <p>Otherwise go to step 21.</p>
	<p>Once inserted, allow time for the RMD to be detected by the system.</p> <p>RMD is inserted in the latched USB port on the active E5-MASP.</p>
2 <input type="checkbox"/>	<p>Issue the command to retrieve measurement status.</p>
	<p>rtrv-meas-sched</p>
3 <input type="checkbox"/>	<p>Response to retrieve command is displayed.</p> <p>Record if collection is on or off: _____</p> <p>Record if system configuration requires measurements to be on or off: _____</p> <p>If COLLECT=ON, continue to next step. Otherwise, go to Step 6.</p>
	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y COLLECT = off SYSTOT-STP = (off) SYSTOT-TT = (off) SYSTOT-STPLAN = (off) COMP-LNKSET = (off) COMP-LINK = (off) MTCB-STP = (on) MTCB-LINK = (on) MTCB-STPLAN = (on) MTCB-LNKSET = (on) ;</pre>
4 <input type="checkbox"/>	<p>Issue the command to turn off measurement collection.</p>
	<p>chg-meas:collect=off</p>
5 <input type="checkbox"/>	<p>Response to the change command is displayed.</p>
	<pre>eaglestp YY-MM-DD hh:mm:ss zzzz PPP XX.x.x-YY.y.y chg-meas:collect=off Command entered at terminal #XX. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y CHG-MEAS: MASP A - COMPLTD ;</pre>
6 <input type="checkbox"/>	<p>Issue the command to format the RMD.</p>
	<p>FORMAT-DISK:TYPE=SYSTEM:FORCE=YES</p>
7 <input type="checkbox"/> <input type="checkbox"/>	<p>Response to format command is displayed.</p> <p>If the format fails, first repeat the previous step, and then contact My Oracle Support.</p>
	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Format-disk of system removable cartridge started. Extended processing required, please wait. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Format-disk of system removable cartridge completed. ;</pre>
8 <input type="checkbox"/>	<p>Issue the command to copy the GPLs to the RMD.</p>
	<p>COPY-GPL</p>

¹¹ DO NOT use the source release RMD created in Procedure 2.

Procedure 10: Backing up Converted Database

<p>9</p> <input type="checkbox"/>	<p>Response to copy command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y COPY-GPL Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y COPY-GPL: MASP A - COPY STARTS ON ACTIVE MASP ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y COPY-GPL: MASP A - COPY COMPLETED ON ACTIVE MASP ;</pre>
<p>10</p> <input type="checkbox"/>	<p>Issue the command to report database status.</p>	<p>REPT-STAT-DB</p>
<p>11</p> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<p>Response to database status command is displayed.</p> <p>Check entries in 'C' should be coherent, which is indicated by a 'Y'.</p> <p>If all FD BKUP & FD CRNT entries in column 'LEVEL' are the same, go to step 16.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y DATABASE STATUS: >> OK << TDM 1114 (STDBY) TDM 1116 (ACTV) C LEVEL TIME LAST BACKUP C LEVEL TIME LAST BACKUP ----- FD BKUP Y XXXX YY-MM-DD hh:mm:ss TTTT Y XXXX YY-MM-DD hh:mm:ss TTTT FD CRNT Y XXXX YY-MM-DD hh:mm:ss TTTT Y XXXX YY-MM-DD hh:mm:ss TTTT MCAP 1113 MCAP 1115 ----- RD BKUP - - - - N 1 - - USB BKP - - - - - - - -</pre>
<p>12</p> <input type="checkbox"/>	<p>Issue the database command to backup the fixed disks.</p>	<p>CHG-DB:ACTION=BACKUP</p>
<p>13</p> <input type="checkbox"/>	<p>Response and progress of back up command are displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y 5028.1114 CARD 1115 Database BACKUP started Report Date:YY-MM-DD Time:hh:mm:ss ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y BACKUP (FIXED): MASP A - Backup starts on active MASP. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y BACKUP (FIXED): MASP A - Backup on active MASP to fixed disk complete. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y BACKUP (FIXED): MASP A - Backup starts on standby MASP. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y 5031.1116 CARD 1115 Database action ended - OK Report Date:YY-MM-DD Time:hh:mm:ss ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y BACKUP (FIXED): MASP A - Backup on standby MASP to fixed disk complete ;</pre>
<p>14</p> <input type="checkbox"/>	<p>Issue the command to report database status.</p>	<p>rept-stat-db</p>
<p>15</p> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<p>Response to database status command is displayed.</p> <p>Check: entries in 'C' should be coherent, which is indicated by a 'Y'.</p> <p>Verify both 'FD CRNT' and 'FD BKUP' Levels are equal.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y DATABASE STATUS: >> OK << TDM 1114 (STDBY) TDM 1116 (ACTV) C LEVEL TIME LAST BACKUP C LEVEL TIME LAST BACKUP ----- FD BKUP Y XXXX YY-MM-DD hh:mm:ss TTTT Y XXXX - - FD CRNT Y XXXX YY-MM-DD hh:mm:ss TTTT Y XXXX - - MCAP 1113 MCAP 1115 ----- RD BKUP - - - - N 1 - - USB BKP - - - - - - - -</pre>
<p>16</p> <input type="checkbox"/>	<p>Issue the database command to back up to the</p>	<p>chg-db:action=backup:dest=remove</p>

Procedure 10: Backing up Converted Database

<input type="checkbox"/>	target-release RMD.	
<input type="checkbox"/>	Response to backup command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y 5035.1114 CARD 1115 Database BACKUP started Report Date:YY-MM-DD Time:hh:mm:ss eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y BACKUP (REMOVABLE): MASP B - Backup starts on active MASP. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y BACKUP (REMOVABLE): MASP B - Backup to removable cartridge complete. ;</pre>
<input type="checkbox"/>	Issue the command to report database status.	rept-stat-db
<input type="checkbox"/>	Response to database status command is displayed. Check entries in 'C' should be coherent, which is indicated by a 'Y'.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y DATABASE STATUS: >> OK << TDM 1114 (STDBY) TDM 1116 (ACTV) C LEVEL TIME LAST BACKUP C LEVEL TIME LAST BACKUP ----- FD BKUP Y XXX YY-MM-DD hh:mm:ss TTTT Y XXX YY-MM-DD hh:mm:ss TTTT FD CRNT Y XXX YY-MM-DD hh:mm:ss TTTT Y XXX YY-MM-DD hh:mm:ss TTTT MCAP 1113 MCAP 1115 ----- RD BKUP - - - - Y XXX YY-MM-DD hh:mm:ss TTTT USB BKP - - - - - - - - - -</pre>
<input type="checkbox"/>	Issue the command to display GPL status.	rtrv-gpl
<input type="checkbox"/>	Response from the retrieve command is displayed. Verify that the GPL versions that are displayed in the "RELEASE" and "REMOVE TRIAL" column are correct; see Section 1.3	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y GPL Auditing ON GPL CARD RELEASE APPROVED TRIAL REMOVE TRIAL GGGGGG1 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG1 1116 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG1 1113 ----- GGGGGG2 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG2 1116 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG2 1113 ----- GGGGGG3 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG3 1116 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG3 1113 ----- OAMHC 1114 XXX-XXX-XXX XXX-XXX-XXX ----- OAMHC 1116 XXX-XXX-XXX XXX-XXX-XXX ----- OAMHC 1113 ----- GGGGGG4 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG4 1116 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG4 1113 ----- GGGGGG5 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG5 1116 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG5 1113 ----- GGGGGG6 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG6 1116 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX GGGGGG6 1113 ----- ;</pre>
<input type="checkbox"/>	Remove the target-release RMD from the drive slot.	Store the RMD in a safe location.
<input type="checkbox"/>	If the system is configured for remote backups, issue the database command to backup to remote FTP server. Otherwise, go to step 23.	chg-db:action=backup:dest=server
<input type="checkbox"/>	Response to backup command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y 5035.1114 CARD 1115 Database BACKUP started Report Date:YY-MM-DD Time:hh:mm:ss eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y BACKUP (SERVER): MASP B - Backup starts on active MASP. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y BACKUP (SERVER): MASP B - Backup to server complete. ;</pre>

Procedure 10: Backing up Converted Database

25 <input type="checkbox"/>	If steps 4 & 5 were executed, issue the command to turn the measurements collection on.	<code>chg-meas:collect=on</code>
26 <input type="checkbox"/>	Response to change measurement command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y chg-meas:collect=on Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y CHG-MEAS: MASP A - COMPLTD ;</pre>

→ This concludes SESSION ONE ←

5.4 Upgrade Session 2

Procedure 11. Verifying Upgrade Session 2 Requirements

S T E P #	This procedure verifies that all upgrade session 2 requirements have been met. This procedure assumes an acceptable amount of soak time has occurred since the end of session #1. The expected norm for soak time is 48 hours. Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number. SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR UPGRADE ASSISTANCE.	
1 <input type="checkbox"/>	Complete pre-upgrade session 2 tasks	All tasks in Table 19 must be completed before continuing.

Table 19. Upgrade Session 2 Requirements

✓	Tasks to be completed prior to upgrade session 2 execution
	Verify that an EAGLE system health check 3 has been performed.

Procedure 12: Upgrading Removable medias

S T E P #	<p>This procedure describes how to update source-release removable media to the target release. See recommendation #2 in section 1.6.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR UPGRADE ASSISTANCE.</p>	
1 <input type="checkbox"/>	<p>Echo command input to capture terminal.</p> <p>See recommendation #1 & #6 in section 1.6</p>	<p>act-echo:trm=P (Where the value for <i>P</i> is one of the printer/KSR terminal port numbers recorded in Procedure 1, Step 3)</p>
2 <input type="checkbox"/>	<p>Response to activate command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y act-echo:trm=P Command entered at terminal #XX. ;</pre>
3 <input type="checkbox"/>	<p>If capture terminal's output groups are not all set to YES, issue the change terminal command.</p>	<p>chg-trm:trm=P:all=yes (<i>P</i> is the terminal port that is specified in step 1)</p>
4 <input type="checkbox"/>	<p>Response to change terminal command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y chg-trm:trm=P:all=yes Command entered at terminal #XX. ;</pre>
5 <input type="checkbox"/>	<p>If the measurements platform is enabled¹² go to step 9. Otherwise, issue the command to retrieve measurement status.</p>	<p>rtrv-meas-sched</p>
6 <input type="checkbox"/>	<p>Response to retrieve command is displayed.</p> <p>Record if collection is on or off: _____</p> <p>Record if system configuration requires measurements to be on or off: _____</p> <p>If COLLECT=ON, continue to next step. Otherwise, go to Step 9.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y COLLECT = off SYSTOT-STP = (off) SYSTOT-TT = (off) SYSTOT-STPLAN = (off) COMP-LNKSET = (off) COMP-LINK = (off) MTC-D-STP = (on) MTC-D-LINK = (on) MTC-D-STPLAN = (on) MTC-D-LNKSET = (on) ;</pre>
7 <input type="checkbox"/>	<p>Issue the command to turn off measurement collection.</p>	<p>chg-meas:collect=off</p>
8 <input type="checkbox"/>	<p>Response to the change command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss zzzz PPP XX.x.x-YY.y.y chg-meas:collect=off Command entered at terminal #XX. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y CHG-MEAS: MASP A - COMPLTD ;</pre>

¹² If enabled, the measurements platform feature is displayed in Procedure 1, Step 11.

Procedure 12: Upgrading Removable medias

<input type="checkbox"/>	9	Issue measurement report command.	rept-meas:type=systot:enttype=stp
<input type="checkbox"/>	10	Response to the command is displayed. If command fails, reattempt in five minutes until it completes, See Table 20.	E2278 Cmd Rej: 30-minute measurement collection in progress eaglestp YY-MM-DD hh:mm:ss zzzz PPP XX.x.x-YY.y.y rept-meas:type=systot:enttype=stp Command entered at terminal #XX. ;
<input type="checkbox"/>	11	If LNP feature on, issue measurement report command. (Note this cmd is not supported in 46.3)	rept-meas:type=mtcd:enttype=lnp
<input type="checkbox"/>	12	Response to the command is displayed. If command fails, reattempt in five minutes until it completes, See Table 20.	E2277 Cmd Rej: Daily measurement collection in progress eaglestp YY-MM-DD hh:mm:ss zzzz PPP XX.x.x-YY.y.y rept-meas:type=mtcd:enttype=lnp Command entered at terminal #XX. ;
<input type="checkbox"/>	13	Issue measurement report command.	rept-meas:type=mtcdth:enttype=stp
<input type="checkbox"/>	14	Response to the command is displayed. If command fails, reattempt in five minutes until it completes, See Table 20. If no source cartridges need upgrading, go to next procedure.	E2276 Cmd Rej: Day-to-hour measurement collection in progress eaglestp YY-MM-DD hh:mm:ss zzzz PPP XX.x.x-YY.y.y rept-meas:type=mtcdth:enttype=stp Command entered at terminal #XX. ;
<input type="checkbox"/>	15	Insert the source-release RMD to be upgraded into the drive slot on the active MASP.	Once inserted, allow time for the RMD to be detected by the system. RMD is inserted in the latched USB port on the active E5-MASP.
<input type="checkbox"/>	16	Issue the command to format the RMD.	format-disk:type=system:force=yes
<input type="checkbox"/>	17	Response to format command is displayed. If the format should fail, first repeat Step 16, then contact My Oracle Support.	eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Format-disk of system removable cartridge started. Extended processing required, please wait. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Format-disk of system removable cartridge completed. ;

Table 20. MTT errors generated when measurement collection is in progress.

Response ID Code:	Command Reject Text for MTT error:
E2276	Day-to-hour measurement collection in progress
E2277	Daily measurement collection in progress
E2278	30-minute measurement collection in progress
E2279	5-minute measurement collection in progress
E2290	Hourly measurement collection in progress
E3688	15-minute measurement collection in progress

<input type="checkbox"/>	18	Issue the command to copy the GPLs to the target-release RMD.	copy-gpl
<input type="checkbox"/>	19	Response to copy command is displayed.	eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y copy-gpl

Procedure 12: Upgrading Removable medias

<input type="checkbox"/>		<pre> Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.X.X-YY.Y.Y COPY-GPL: MASP A - COPY STARTS ON ACTIVE MASP ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.X.X-YY.Y.Y COPY-GPL: MASP A - COPY COMPLETED ON ACTIVE MASP ; </pre>
20 <input type="checkbox"/>	Issue the command to backup the target-release database to the RMD.	chg-db:action=backup:dest=remove
21 <input type="checkbox"/>	Response to backup command is displayed.	<pre> eaglestp YY-MM-DD hh:mm:ss EST PPP XX.X.X-YY.Y.Y 5035.1114 CARD 1115 Database BACKUP started Report Date:YY-MM-DD Time:hh:mm:ss ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.X.X-YY.Y.Y BACKUP (REMOVABLE): MASP B - Backup starts on active MASP. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.X.X-YY.Y.Y BACKUP (REMOVABLE): MASP B - Backup to removable cartridge complete. ; </pre>
22 <input type="checkbox"/>	Remove the target-release RMD from the drive slot and store it in a safe place.	
23 <input type="checkbox"/>	If upgrading more RMDs, repeat step 15-22.	

Procedure 13: Backing Up Fixed Disk

S T E P #	<p>This procedure backs up the converted target-release database to the fixed disk. This is done to ensure a recent database backup has been performed. Verification of the converted database is also done.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR UPGRADE ASSISTANCE.</p>	
1 <input type="checkbox"/>	Issue the command to backup the database to the fixed disks.	chg-db:action=backup
2 <input type="checkbox"/>	Response and progress of the backup command are displayed.	<pre> eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y 5028.1114 CARD 1115 Database BACKUP started Report Date:YY-MM-DD Time:hh:mm:ss ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y BACKUP (FIXED): MASP A - Backup starts on active MASP. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y BACKUP (FIXED): MASP A - Backup on active MASP to fixed disk complete. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y BACKUP (FIXED): MASP A - Backup starts on standby MASP. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y 5031.1116 CARD 1115 Database action ended - OK Report Date:YY-MM-DD Time:hh:mm:ss ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y BACKUP (FIXED): MASP A - Backup on standby MASP to fixed disk complete. ; </pre>

Procedure 14: Upgrading Spare Fixed Disks

S T E P #	<p>This procedure describes how to upgrade your spare fixed disks to the target release.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR UPGRADE ASSISTANCE.</p>																						
1 <input type="checkbox"/>	Issue the command to display card status.	rept-stat-card:appl=oam																					
2 <input type="checkbox"/> <input type="checkbox"/>	<p>Response to the card status command is displayed.</p> <p>Determine MASP activity.</p> <p>Act MASP _____</p> <p>Stby MASP _____</p>	<table border="0"> <thead> <tr> <th>CARD</th> <th>VERSION</th> <th>TYPE</th> <th>GPL</th> <th>PST</th> <th>SST</th> <th>AST</th> </tr> </thead> <tbody> <tr> <td>1113</td> <td>XXX-XXX-XXX</td> <td>E5MCAP</td> <td>OAMHC</td> <td>IS-NR</td> <td>Standby</td> <td>----</td> </tr> <tr> <td>1115</td> <td>XXX-XXX-XXX</td> <td>E5MCAP</td> <td>OAMHC</td> <td>IS-NR</td> <td>Active</td> <td>----</td> </tr> </tbody> </table> <p>Command Completed.</p>	CARD	VERSION	TYPE	GPL	PST	SST	AST	1113	XXX-XXX-XXX	E5MCAP	OAMHC	IS-NR	Standby	----	1115	XXX-XXX-XXX	E5MCAP	OAMHC	IS-NR	Active	----
CARD	VERSION	TYPE	GPL	PST	SST	AST																	
1113	XXX-XXX-XXX	E5MCAP	OAMHC	IS-NR	Standby	----																	
1115	XXX-XXX-XXX	E5MCAP	OAMHC	IS-NR	Active	----																	
3 <input type="checkbox"/>	Insert target-release RMD into the drive slot on the Active E5MASP.	Once inserted, allow time for the RMD to be detected by the system.																					
4 <input type="checkbox"/>	Issue the command to inhibit standby MASP.	inh-card:loc=XXXX Where XXXX is the location for the Standby MASP in Step 2.																					
5 <input type="checkbox"/>	Response to the command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Card has been inhibited.</pre> <pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Command Completed.</pre>																					
6 <input type="checkbox"/>	Place spare E5-MASP in system.	<input type="checkbox"/> Slide the MASP H/S switch (SW3) on the standby MASP up to the unlocked position (Wait for all drive LEDs to transition to a steady blue). <input type="checkbox"/> Remove the standby E5-MASP card determined in step 2. <input type="checkbox"/> Insert the spare E5-MASP card. <input type="checkbox"/> Slide the MASP H/S switch (SW3) on the new standby MASP down to the locked position (Wait for the MASP H/S LED to transition from blinking blue to off and the MASP to come up in standby mode). <p>Note: UAMs are generated during this step. An audible alarm is generated. Wait for the new standby MASP to come up in standby mode and system returns to duplex mode.</p>																					
7 <input type="checkbox"/>	Retrieve the GPLs running on the card location.	REPT-STAT-GPL:LOC=XXXX Where XXXX is the location for the Standby MASP specified Step 4.																					
8 <input type="checkbox"/>	<p>Response to the card status command is displayed.</p> <p>If ALM is displayed after the running version of the flash GPL, continue to next step.</p> <p>Otherwise, continue to step 11</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y GPL CARD RUNNING APPROVED TRIAL GGGGG XXXX ----- ----- ----- BLMCAP YYY-YYY-YYY ALM XXX-XXX-XXX YYY-YYY-YYY</pre> <p>Command Completed.</p>																					
9 <input type="checkbox"/>	Issue the command to initialize the flash memory.	FLASH-CARD:CODE=APPR:LOC=XXXX Where XXXX is the location for the Standby MASP in Step 2. NOTE: this command causes the card to boot.																					

Procedure 14: Upgrading Spare Fixed Disks

<input type="checkbox"/> <input type="checkbox"/>	<p>Response to the flash card command is displayed.</p> <p>Wait for command complete to indicate that the card is finished loading before proceeding.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.X.X-YY.Y.Y flash-card:code=appr:loc=XXXX Command entered at terminal #nn. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.X.X-YY.Y.Y Command Completed.</pre>
<input type="checkbox"/>	<p>Insert target-release USB into the drive slot on the standby E5-MASP.</p>	<p>Once inserted, allow time for the RMD to be detected by the system.</p>
<input type="checkbox"/>	<p>Issue the command to allow card.</p>	<p>ALW-CARD:LOC=XXXX</p> <p>where <i>XXXX</i> is the location for the Standby MASP.</p>
<input type="checkbox"/>	<p>Response to the command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.X.X-YY.Y.Y Card has been allowed. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.X.X-YY.Y.Y Command Completed.</pre>
<input type="checkbox"/>	<p>Issue the command to display MASP status.</p>	<p>REPT-STAT-CARD:APPL=OAM</p>
<input type="checkbox"/> <input type="checkbox"/>	<p>Response to the card status command is displayed.</p> <p>Verify the MASP cards are running the same version of the OAM application GPL.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.X.X-YY.Y.Y CARD VERSION TYPE GPL PST SST AST 1113 XXX-XXX-XXX TTTT GGGG IS-NR ACTIVE ---- 1115 XXX-XXX-XXX TTTT GGGG IS-NR STANDBY ---- Command Completed.</pre>
<input type="checkbox"/>	<p>Issue the command to display security log status.</p>	<p>REPT-STAT-SECULOG</p>
<input type="checkbox"/> <input type="checkbox"/>	<p>Response to the command is displayed.</p> <p>If the ENTRIES column displays any value other than 0 for the Standby ROLE, proceed to the next step. Otherwise, go to step 25.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.X.X-YY.Y.Y rept-stat-seculog Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.X.X-YY.Y.Y -- SINCE LAST UPLOAD -- OLDEST NEWEST LAST LOC ROLE ENTRIES %FULL OFLO FAIL RECORD RECORD UPLOAD 1114 Active 19 1 No No 99-01-01 99-01-01 00-00-00 13:43:37 14:08:12 00:00:00 1116 Standby 0 0 No No 99-01-01 99-01-01 99-01-01 13:39:39 13:43:10 14:07:59</pre>
<input type="checkbox"/>	<p>Issue the command to copy the security log from the standby disk to FTA area.</p>	<p>COPY-SECULOG:SLOG=STB:DFILE=UPGP15.SPR</p>
<input type="checkbox"/> <input type="checkbox"/>	<p>Response to copy seculog command is displayed.</p> <p>If this command fails, proceed to next step. Otherwise, go to step 25.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.X.X-YY.Y.Y Security log on TDM 111X copied to file upgp15.spr on TDM 111Y ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.X.X-YY.Y.Y 0468.0177 SECULOG 111X Security log exception cleared</pre>
<input type="checkbox"/>	<p>Issue the command to display the FTA directory.</p>	<p>DISP-FTA-DIR</p>
<input type="checkbox"/> <input type="checkbox"/>	<p>Response to display directory command is displayed.</p> <p>If there are any files that need to be saved, they need to be removed via a file transfer.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.X.X-YY.Y.Y File Transfer Area Directory of fixed disk 111Y FILENAME LENGTH LAST MODIFIED LBA YYMMDDs.log 2560256 99-01-03 10:18:44 388769 YYMDDa.log 2560256 99-01-03 10:19:20 393770 m60_lnp.csv 0 99-01-03 13:10:38 398771 3 File(s) 21093376 bytes free</pre>

Procedure 14: Upgrading Spare Fixed Disks

22 <input type="checkbox"/>	Issue the command to delete ALL files in the transfer area.	DLT-FTA:ALL=YES
23 <input type="checkbox"/>	Response to the delete command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y dlt-fta:all=yes Command entered at terminal #nn.</pre>
24 <input type="checkbox"/>	Repeat Steps 18 – 19.	
25 <input type="checkbox"/>	Issue the command to copy the active MASP image to the standby disk.	COPY-DISK : DLOC=XXXX: FORCE=YES : FORMAT=YES (Where XXXX is the location of the STANDBY E5-TDM recorded in Step 2)
26 <input type="checkbox"/>	Response to the copy-disk command is displayed. Note: user terminal port may be automatically logged out. Wait for the card reload to complete.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Copy-disk (fixed): from active (YYYY) to standby (XXXX) started. Extended processing required, please wait.</pre> <p>;</p> <pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Copy-disk (fixed): from active (XXXX) to standby (XXXX) complete. Measurements may be allowed now if desired.</pre> <p>;</p> <pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y 0485.0014 CARD 1115 OAMHC Card is present</pre>
27 <input type="checkbox"/>	If the disk copy fails repeat steps 25 - 26.	<ol style="list-style-type: none"> Repeat Steps 25-26. If second attempt fails, contact My Oracle Support.
28 <input checked="" type="checkbox"/>	If the measurements platform is enabled then go next procedure. Otherwise, if Procedure 12 Steps 7 & 8 were executed, issue the command to turn the measurements collection on.	chg-meas:collect=on
29 <input type="checkbox"/>	Response to change measurement command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y chg-meas:collect=on Command entered at terminal #10.</pre> <p>;</p> <pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y CHG-MEAS: MASP A - COMPLTD</pre>

Procedure 15: Upgrading Spare MUX cards

S T E P #	<p>This procedure describes how to upgrade your spare MUX cards.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR UPGRADE ASSISTANCE.</p> <p>Spare HMUX cards need to be downloaded with latest flash gpl. Due to changes incorporated in the new flash gpl if an HMUX card running a down level flash version is inserted into the system the card will steam errors to the screen.</p>	
1 <input type="checkbox"/>	Issue the command to display imt bus status.	rept-stat-mux
2 <input type="checkbox"/>	Response to the MUX status command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y CARD TYPE PST SST AST 1109 HIPR IS-NR Active ----- 1110 HIPR IS-NR Active ----- 1209 HIPR2 IS-NR Active ----- 1210 HIPR2 IS-NR Active ----- 1309 HMUX IS-NR Active ----- 1310 HMUX IS-NR Active ----- Command Completed.</pre>
<input type="checkbox"/>	Record the types of MUX cards present: <u>HMUX / HIPR / HIPR2</u>	;
3 <input type="checkbox"/>	Issue the command to display imt bus status.	rept-stat-imt
4 <input type="checkbox"/>	Response to the card status command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y rept-stat-imt Command entered at terminal #10.</pre>
<input type="checkbox"/>	Verify that both imt buses are IS-NR. If either bus is not IS-NR Stop this procedure and contact My Oracle Support .	<pre>; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y IMT PST SST AST A IS-NR Active ----- ALARM STATUS = No Alarms. IMT PST SST AST B IS-NR Active ----- ALARM STATUS = No Alarms. Command Completed.</pre>
5 <input type="checkbox"/>	Issue the command to inhibit IMT bus-A.	inh-imt:bus=a
6 <input type="checkbox"/>	Response to the command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Inhibit IMT Bus A command issued eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y 8687.0098 IMT BUS A IMT inhibited</pre>
7 <input type="checkbox"/>	Swap spare MUX cards with those on the IMT A-bus. (i.e. location 1109, 1209)	Note: swap cards of like types (using the output from step 2, a HMUX can be placed in 1109, while a HIPR can be placed in 1309.)
8 <input type="checkbox"/>	Issue the command to allow IMT bus-A.	alw-imt:bus=a
9 <input type="checkbox"/>	Response to the command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Allow IMT Bus A command issued eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y 8712.0097 IMT BUS A IMT allowed</pre>
10 <input type="checkbox"/>	Issue the card status command to identify the MUX cards in the system.	rept-stat-gpl:gpl=XXXX (Where XXXX = is bphmux for HMUX, hipr for HIPR, or hipr2 for HIPR2 cards.)

Procedure 15: Upgrading Spare MUX cards

<p>11</p> <p><input type="checkbox"/></p>	<p>Response to the command is displayed.</p> <p>Record the CARD locations for all MUX cards in the system not running the APPROVED version of the GPL.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y GPL Auditing ON APPL CARD RUNNING APPROVED TRIAL HIPR2 xx09 XXX-XXX-XXX ALM XXX-XXX-XXX XXX-XXX-XXX HIPR2 xx10 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX HIPR2 xx09 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX HIPR2 xx10 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX BPHMUX xx09 XXX-XXX-XXX ALM XXX-XXX-XXX XXX-XXX-XXX BPHMUX xx10 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX HIPR xx09 XXX-XXX-XXX ALM XXX-XXX-XXX XXX-XXX-XXX HIPR xx10 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX Command Completed. ;</pre>
<p>12</p> <p><input type="checkbox"/></p>	<p>Enter the command to initialize the FLASH on a MUX card on the A-bus that is not running the APPROVED version of the GPL.</p>	<pre>init-flash:loc=xx09:code=appr (Where XX = is a shelf number.)</pre>
<p>13</p> <p><input type="checkbox"/></p>	<p>Response to the flash initialization is shown.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y init-flash:loc=XX09:code=appr Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y FLASH Memory Download for card xx09 Started. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y FLASH Memory Download for card xx09 Completed. ;</pre>
<p>14</p> <p><input type="checkbox"/></p>	<p>Repeat steps 12-13 for each card recorded in step 11.</p>	
<p>15</p> <p><input type="checkbox"/></p>	<p>Enter the command to initialize the current bus.</p>	<pre>init-mux:bus=a</pre>
<p>16</p> <p><input type="checkbox"/></p>	<p>Response to the initialization command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y 5080.0014 CARD XX09 BPHMUX Card is present ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y 5081.0014 CARD YY09 BPHMUX Card is present ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y * 5082.0004 * GPL SYSTEM BPHMUX Card is running non-activated GPL</pre>
<p>17</p> <p><input type="checkbox"/></p>	<p>Issue the command to activate the flash on a MUX card flashed in step 12.</p>	<pre>act-flash:loc=xx09 (Where XX = is a shelf number.)</pre>
<p>18</p> <p><input type="checkbox"/></p>	<p>Response to the activate command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y FLASH Memory Activation for card 1209 Started. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y FLASH Activation for card 1209 Completed. ;</pre>
<p>19</p> <p><input type="checkbox"/></p>	<p>Repeat steps 17-18 for each MUX card recorded in step 11.</p>	
<p>20</p> <p><input type="checkbox"/></p>	<p>Issue the command to display the MUX card GPL status.</p>	<pre>rept-stat-gpl:gpl==XXXX (Where XXXX = is bphmux for HMUX cards, hipr for HIPR cards, or hipr2 for HIPR2 cards.)</pre>
<p>21</p> <p><input type="checkbox"/></p>	<p>Verify that all MUX cards are running the approved GPL.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y GPL Auditing ON APPL CARD RUNNING APPROVED TRIAL HIPR2 xx09 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX HIPR2 xx10 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX HIPR2 xx09 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX HIPR2 xx10 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX HIPR2 xx09 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX HIPR2 xx10 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX HIPR2 xx09 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX HIPR2 xx10 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX Command Completed. ;</pre>

Procedure 15: Upgrading Spare MUX cards

22 <input type="checkbox"/>	Repeat steps 10-21 for all MUX card types.	
23 <input type="checkbox"/>	Repeat steps 3-22 until all spare MUX cards have been flashed.	

Procedure 16: Verifying All Databases

STEP #	Description	Command
1	Issue the command to display database information.	rept-stat-db:display=all
2	<p>Response to the command is displayed.</p> <p>Look in the columns labeled 'C,' 'T,' and 'LEVEL' output by this command.</p> <p>Verify entries in column 'C' show 'Y', which indicates coherence.</p> <p>Verify entries in column 'T' show 'N' (except the E5-MDAL), which indicates that the database is not in transition.</p> <p>Verify all entries in the database LEVEL column are the same. LEVEL is a value, which varies depending on the system.</p> <p>If the STDBY databases are not coherent or at the correct level, repeat Procedure 3, step 8.</p> <p>Verify that the MPS databases are coherent.</p>	<pre>eag estp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y DATABASE STATUS: >> OK << TDM 1114 (ACTV) C LEVEL TIME LAST BACKUP TDM 1116 (STDBY) C LEVEL TIME LAST BACKUP ----- FD BKUP Y YY YY-MM-DD hh:mm:ss TTTT Y YY YY-MM-DD hh:mm:ss TTTT FD CRNT Y XXX MCAP 1113 MCAP 1115 ----- RD BKUP - - - - Y YY YY-MM-DD hh:mm:ss TTTT USB BKP - - - - - - - - ----- CARD/APPL LOC C T LEVEL TIME LAST UPDATE EXCEPTION ----- SS7ANSI 1101 Y N XXX 06-04-19 12:13:02 - SS7ANSI 1103 Y N XXX 06-04-19 12:13:02 - GLS 1104 Y N XXX 06-04-19 12:13:02 - SS7ANSI 1105 Y N XXX 06-04-19 12:13:02 - SS7ANSI 1106 Y N XXX 06-04-19 12:13:02 - VSCCP 1107 Y N XXX 06-04-19 12:13:02 - VSCCP 1111 Y N XXX 06-04-19 12:13:02 - OAM-RMV 1113 - - - - - - - - TDM-CRNT 1114 Y N XXX 06-04-19 12:13:02 - TDM-BKUP 1114 Y - YYY 06-04-18 16:11:18 DIFF LEVEL OAM-RMV 1115 Y - YYY 06-04-18 16:11:18 DIFF LEVEL OAM-USB 1115 - - - - - - - - TDM-CRNT 1116 Y N XXX 06-04-19 12:13:02 - TDM-BKUP 1116 Y - YYY 06-04-18 16:11:18 DIFF LEVEL E5MDAL 1117 Y - YYY 06-04-18 16:11:18 DIFF LEVEL ----- EPAP A (ACTV) C BIRTHDATE LEVEL EXCEPTION ----- PDB 03-09-04 15:09:38 418231879 - RTDB Y 03-09-04 15:09:38 418231879 - RTDB-EAGLE 06-02-06 22:13:06 418231879 - ----- EPAP B (STDBY) C BIRTHDATE LEVEL EXCEPTION ----- PDB 03-09-04 15:09:38 418231879 - RTDB Y 03-09-04 15:09:38 418231879 - RTDB-EAGLE 06-02-06 22:13:06 418231879 - ----- EAGLE RTDB REPORT CARD/APPL LOC C BIRTHDATE LEVEL EXCEPTION IN-SRVC ----- VSCCP 1107 Y 06-02-06 22:13:06 418231879 - 0d 4h 33m VSCCP 1111 Y 06-02-06 22:13:06 418231879 - 0d 4h 33m ----- ;</pre>
3	When the command completes, remove the target-release RMD from the drive slot.	Store the RMD in a safe location.

Procedure 17: Session 2 Completion

S T E P #	<p>This procedure resumes measurement collection.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR <u>UPGRADE ASSISTANCE</u>.</p>	
1 <input type="checkbox"/>	Issue status command for troubles.	REPT-STAT-TRBL
2 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<p>Response to command is displayed.</p> <p>If UAM 0002 is present where XXXX is a flash GPL (i.e. BLMCAP or BLIXP), record it below:</p> <p>_____</p> <p>_____</p> <p>If any GPL is recorded contact My Oracle Support and report the GPL alarm.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y SEQN UAM AL DEVICE ELEMENT TROUBLE TEXT 0329.0048 * TERMINAL 15 Terminal failed 0330.0048 * TERMINAL 16 Terminal failed 0006.0002 * GPL SYSTEM XXXX Card is not running approved GPL 0331.0176 * SECULOG 1116 Stdby security log-upload required 0332.0308 *C SYSTEM Node isolated due to SLK failures Command Completed.</pre>

→ This concludes SESSION TWO ←

6. RECOVERY PROCEDURES

Before executing any of these procedures, contact [My Oracle Support](#) at [Oracle Support Contacts Global Directory](#) [see Appendix F.] In the event that other platforms are being upgraded in parallel, a determination whether recovery action is required on those platforms is required. Persons performing the upgrade should be familiar with these upgrade documents.

6.1 Backout Setup Procedures

Execute this section only if there is a problem and it is desired to revert back to the pre-upgrade version of the software.

Warning

Do not attempt to perform these backout procedures without first contacting the [My Oracle Support](#) at [Oracle Support Contacts Global Directory](#)

6.2 Recovery Procedure A

Procedure 18: Load and Run Source OAM

S T E P #	<p>Perform this Recovery Procedure in order to copy the BLMCAP GPLs from the source after performing procedures 19, 20, 21, or 22 when upgrading with the fixed workspace.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR UPGRADE ASSISTANCE.</p>
	<p>When directed to by My Oracle Support, execute this procedure: After the completion of Procedure 19, 20, 21, and 22 (but not 23).</p>
1 <input type="checkbox"/>	<p>If a USB drive is present in the system, remove it.</p>
2 <input type="checkbox"/>	<p>If recovering from release 46.3 or later back to a release of 46.2 or earlier, goto to step 16, else continue to next step.</p>
3 <input type="checkbox"/>	<p>Insert source release media into the active MASP. Once inserted, allow time for the source-release RMD to be detected by the system.</p>
4 <input type="checkbox"/>	<p>Issue the command to retrieve BLMCAP application data. rtrv-gpl:gpl=blmcap</p>
5 <input type="checkbox"/>	<p>Response to rtrv-gpl command is displayed.</p> <p>Record the "REMOVE TRIAL" version: _____ ;</p> <pre style="font-family: monospace;"> eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.X.X-YY.Y.Y GPL Auditing ON GPL CARD RELEASE APPROVED TRIAL REMOVE TRIAL BLMCAP 1114 XXX-XXX-XXX XXX-XXX-XXX yyy-yyy-yyy ----- BLMCAP 1116 XXX-XXX-XXX XXX-XXX-XXX yyy-yyy-yyy XXX-XXX-XXX </pre>
6 <input type="checkbox"/>	<p>Issue the command to change the gpl. chg-gpl:gpl=blmcap:ver=xxx-xxx-xxx <i>(where xxx-xxx-xxx is the GPL version recorded in the previous step)</i></p>
7 <input type="checkbox"/>	<p>Response to chg-gpl command is displayed.</p> <pre style="font-family: monospace;"> eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.X.X-YY.Y.Y BLMCAP upload to 1116 completed BLMCAP upload to 1114 completed System Release ID table upload to 1116 completed System Release ID table upload to 1114 completed </pre>

Procedure 18: Load and Run Source OAM

8 <input type="checkbox"/>	Issue the report card status command.	rept-stat-card:appl=oam
9 <input type="checkbox"/> <input type="checkbox"/>	Response to the card status command is displayed. Record which MASP is Active and Standby. Record the card locations of the MASPs: Act MASP _____ Stby MASP _____ ¹³	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y CARD VERSION TYPE GPL PST SST AST 1113 XXX-XXX-XXX E5MCAP OAMHC IS-NR Active ----- 1115 XXX-XXX-XXX E5MCAP OAMHC IS-NR Standby ----- Command Completed.</pre>
10 <input type="checkbox"/>	Remove the source-release RMD from the drive slot.	Store RMD in a safe place.
11 <input type="checkbox"/>	Repeat step 8 until the standby location is IS-NR in step 9	
12 <input type="checkbox"/>	Force a switchover by issuing initialize-card command.	init-card:loc=YYYY Where YYYY is the active MASP location recorded in step 16.
13 <input type="checkbox"/>	Issue the command to log in to the system.	login:uid=XXXXXX (Where XXXXXX is a valid login ID)
15 <input type="checkbox"/>	Response to login command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y User logged in on terminal X</pre>
16 <input type="checkbox"/>	Issue the command to initialize both MASP cards.	init-card:appl=oam
17 <input type="checkbox"/> <input type="checkbox"/>	Response to initialize command is displayed. Ensure that the release shown in the banner is the source release after the MASP becomes active again.	<pre>* eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y * 0261.0013 * CARD 111X OAMHC Card is isolated from the system ASSY SN: xxxxxxxx ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y 5001.0009 CARD 111X OAMHC MASP became active ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y 5038.0014 CARD XXXX OAMHC Card is present ASSY SN: xxxxxxxx ;</pre>
18 <input type="checkbox"/>	Continue to procedure C if directed by the My Oracle Support . Otherwise verify the system with the EAGLE health check [1]. ¹⁴	

¹³ The Standby MASP may report IS-ANR (and the Standby TDM may report 00S-MT[Isolated.]) If so, check LEDs on the card. If LEDs are green, it is OK to proceed. This condition will clear after step 21.

¹⁴ Command REPT-STAT-GPL:DISPLAY=ALL can be used to verify this step.

6.3 Recovery Procedure B

Procedure 19: Full Fallback using Spare E5-MASP

S T E P #	<p>Perform the recovery procedure if directed to do so by My Oracle Support when failure occurs in Procedure 8, Step 1, Item C through Procedure 10.</p> <p>This procedure is a full fallback to the source-release on the spare E5-MASP.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR UPGRADE ASSISTANCE.</p>
	When directed to by My Oracle Support , execute this procedure.
1 <input type="checkbox"/>	<p>If upgrade using the fixed disk method, use Procedure 20.</p> <p>Only perform this procedure if directed by My Oracle Support.</p>
2 <input type="checkbox"/>	<p>Issue the report card status command.</p> <p>rept-stat-card:appl=oam</p>
3 <input type="checkbox"/>	<p>Response to the card status command is displayed.</p> <pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y CARD VERSION TYPE GPL PST SST AST 1113 XXX-XXX-XXX E5MCAP OAMHC IS-NR Active ----- 1115 XXX-XXX-XXX E5MCAP OAMHC IS-NR Standby -----</pre> <p>Determine MASP activity. Record which MASP is Active and Standby.</p> <p>Record the card locations of both sets of MASPs:</p> <p>Act MASP _____</p> <p>Stby MASP _____</p> <p>For this sample output, 1113 is active and 1115 is standby.</p>
4 <input type="checkbox"/>	Remove USB drive from system if present.
5 <input type="checkbox"/>	<p>Place spare E5-MASP in system.</p> <p><input type="checkbox"/> Slide the MASP H/S switch (SW3) on the standby MASP up to the unlocked position (Wait for all drive LEDs to transition to a steady blue).</p> <p><input type="checkbox"/> Remove the standby E5-MASP card determined in step 2.</p> <p><input type="checkbox"/> Insert the spare E5-MASP card.</p> <p><input type="checkbox"/> Slide the MASP H/S switch (SW3) on the new standby MASP down to the locked position (Wait for the MASP H/S LED to transition from blinking blue to off and the MASP to come up in standby mode).</p> <p>Note: UAMs are generated during this step. An audible alarm is generated. Wait for the new standby E5-MASP to come up in standby mode and system returns to duplex mode.</p>
6 <input type="checkbox"/>	<p>Insert the source-release media into the system.</p> <p>A source-release USB drive in the active E5-MASP.</p> <p>Once inserted, allow time for the source-release RMD to be detected by the system</p>
7 <input type="checkbox"/>	<p>After the standby MASP is available, issue the command to initialize the active MASP.</p> <p>init-card:loc=XXXX</p> <p>(Where XXXX is the location of the ACTIVE MASP slot)</p>

Procedure 19: Full Fallback using Spare E5-MASP

<p>8</p> <p><input type="checkbox"/></p>	<p>Response to command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y init-card:loc=XXXX Command entered at terminal #10. ; eaglestp 99-01-02 08:28:34 EST Re XX.x.x-XX.x.x * 0261.0013 * CARD XXXX OAMHC Card is isolated from the system ASSY SN: xxxxxxxx ; 5038.0014 CARD XXXX OAMHC Card is present ASSY SN: xxxxxxxx ;</pre>
<p>9</p> <p><input type="checkbox"/></p>	<p>Issue the command to log in to the system.</p>	<p>login:uid=XXXXX (Where XXXXXX is a valid login ID)</p>
<p>10</p> <p><input type="checkbox"/></p>	<p>Response to login command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y User logged in on terminal x</pre>
<p>11</p> <p><input type="checkbox"/></p>	<p>Inhibit the standby MASP.</p>	<p>INH-CARD:LOC=XXXX (Where XXXX is location of standby MASP)</p>
<p>12</p> <p><input type="checkbox"/></p>	<p>Response to the command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Card has been inhibited. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Command Completed. ;</pre>
<p>13</p> <p><input type="checkbox"/></p>	<p>Put the E5-MASP system in simplex mode.</p>	<p><input type="checkbox"/> Slide the MASP H/S switch (SW3) on the standby MASP up to the unlocked position (Wait for all drive LEDs to transition to a steady blue).</p> <p><input type="checkbox"/> Init-card:loc=XXXX (Where XXXX is the location of the ACTIVE MASP slot)</p> <p><input type="checkbox"/> Wait for the active OAM to return to service and enter simplex mode.</p>
<p>14</p> <p><input type="checkbox"/></p>	<p>Issue the retrieve GPL command to verify source-release GPLs.</p>	<p>rtrv-gpl</p>
<p>15</p> <p><input type="checkbox"/></p> <p><input type="checkbox"/></p>	<p>Response to the retrieve command is displayed.</p> <p>Verify that the GPL versions in REMOVE TRIAL column and RELEASE column match those in Section 1.3 for “Source- Release GPLs.”</p> <p>Example here has location 1114 as the Active MASP slot.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y GPL Auditing OFF APPL CARD RELEASE APPROVED TRIAL REMOVE TRIAL SS7ANSI 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX SS7ANSI 1116 ----- ATMANSI 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX ATMANSI 1116 ----- CCS7ITU 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX CCS7ITU 1116 ----- SS7GX25 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX SS7GX25 1116 ----- STPLAN 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX STPLAN 1116 ----- IMT 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX IMT 1116 ----- BPHCAP 1114 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX BPHCAP 1116 ----- ;</pre>
<p>16</p> <p><input type="checkbox"/></p>	<p>Issue the command to retrieve measurement setup.</p>	<p>rtrv-meas-sched</p>
<p>17</p> <p><input type="checkbox"/></p>	<p>Response to retrieve command is displayed.</p> <p>Record if collection is on or off:</p> <p>_____</p> <p>If COLLECT=ON, continue to next step. Otherwise, go to Step 20.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y COLLECT = off SYSTOT-STP = (off) SYSTOT-TT = (off) SYSTOT-STPLAN = (off) COMP-LNKSET = (off) COMP-LINK = (off) MTCd-STP = (on) MTCd-LINK = (on) MTCd-STPLAN = (on) MTCd-LNKSET = (on) ;</pre>

Procedure 19: Full Fallback using Spare E5-MASP

18 <input type="checkbox"/>	Issue the command to turn off measurement collection. ¹⁵	chg-meas:collect=off	
19 <input type="checkbox"/>	Response to the change command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y chg-meas:collect=off Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y CHG-MEAS: MASP A - COMPLTD ;</pre>	
20 <input type="checkbox"/>	Inhibit the standby MASP.	inh-card:loc=XXXX (Where XXXX is location of standby MASP)	
21 <input type="checkbox"/>	Response to the command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Card has been inhibited. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Command Completed. ;</pre>	
22 <input type="checkbox"/>	Bring the standby E5-MASP system back on the bus.	<input type="checkbox"/>	Slide the E5-MASP H/S switch (SW3) on the standby MASP down to the locked position (Wait for E5MASP H/S LED to transition from blinking blue to a steady blue and the card to return to the IMT bus.)
23 <input type="checkbox"/>	Issue the command to initialize the flash memory.	init-flash:code=appr:loc=XXXX Where XXXX is the location for the Standby MASP.	
24 <input type="checkbox"/>	Response to the init flash command is displayed. Wait for the downloading to complete.	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y FLASH Memory Download for card xxxx started. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y FLASH Memory Download for card xxxx completed. ;</pre>	
25 <input type="checkbox"/>	Issue the command to activate the flash on the standby MASP.	act-flash:loc=XXXX (Where XXXX is the location for the Standby MASP.)	
26 <input type="checkbox"/>	Response to the activate command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y act-flash:loc=XXXX Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y FLASH Memory Activation for card XXXX Started. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y FLASH Activation for card XXXX Completed. ;</pre>	
27 <input type="checkbox"/>	Issue the command to allow card.	alw-card:loc=XXXX where XXXX is the location for the Standby MASP.	
28 <input type="checkbox"/>	Response to the command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Card has been allowed. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Command Completed. ;</pre>	
29 <input type="checkbox"/>	Issue the report card status command.	rept-stat-card:appl=oam	

¹⁵ If executed, this step causes the database level to increment.

Procedure 19: Full Fallback using Spare E5-MASP

<p><input type="checkbox"/> 30</p> <p><input type="checkbox"/></p>	<p>Response from the retrieve command is displayed.</p> <p>Verify that the standby MASP is running the upgrade source release GPL.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y CARD VERSION TYPE APPL PST SST AST 1113 XXX-XXX-XXX E5MCAP OAMHC IS-NR Active ----- 1115 XXX-XXX-XXX E5MCAP OAMHC IS-NR Standby ----- Command Completed.</pre>
<p><input checked="" type="checkbox"/> 31</p>	<p>Issue the command to display security log status.</p>	<p>rept-stat-secu log</p>
<p><input type="checkbox"/> 32</p> <p><input type="checkbox"/></p>	<p>Response to the command is displayed.</p> <p>If the ENTRIES column displays any value other than 0 for the Standby ROLE, proceed to the next step.</p> <p>Otherwise, go to step 40</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y rept-stat-secu log Command entered at terminal #10. eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y -- SINCE LAST UPLOAD -- OLDEST NEWEST LAST LOC ROLE ENTRIES %FULL OFLO FAIL RECORD RECORD UPLOAD 1114 Active 19 1 No No 99-01-01 99-01-01 00-00-00 13:43:37 14:08:12 00:00:00 1116 Standby 0 0 No No 99-01-01 99-01-01 99-01-01 13:39:39 13:43:10 14:07:59</pre>
<p><input type="checkbox"/> 33</p>	<p>Issue the command to copy the security log from the standby disk.</p>	<p>copy-secu log:slog=stb:dfile=upg.procc</p>
<p><input type="checkbox"/> 34</p> <p><input type="checkbox"/></p>	<p>Response to the copy security log command is displayed.</p> <p>If this command fails, proceed to next step. Otherwise, go to Step 40.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Security log on TDM 111X copied to file upg28.procc on TDM 111Y eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y 0468,0177 SECULOG 111X Security log exception cleared</pre>
<p><input type="checkbox"/> 35</p>	<p>Issue the command to display the FTA directory.</p>	<p>disp-fta-dir</p>
<p><input type="checkbox"/> 36</p> <p><input type="checkbox"/></p>	<p>Response to the command is displayed.</p> <p>If there are any files that need to be saved, they need to be removed via a file transfer</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y File Transfer Area Directory of fixed disk 1114 FILENAME LENGTH LAST MODIFIED LBA YYMMDDs.log 2560256 99-01-03 10:18:44 388769 YYMMDDa.log 2560256 99-01-03 10:19:20 393770 m60_lnp.csv 0 99-01-03 13:10:38 398771 3 File(s) 21093376 bytes free</pre>
<p><input type="checkbox"/> 37</p>	<p>Issue the command to delete ALL files in the transfer area.</p>	<p>dlt-fta:all=yes</p>
<p><input type="checkbox"/> 38</p>	<p>Response to the delete command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y dlt-fta:all=yes:loc=XXXX Command entered at terminal #nn.</pre>
<p><input type="checkbox"/> 39</p>	<p>Repeat Steps 31-34</p>	
<p><input type="checkbox"/> 40</p>	<p>Issue the command to copy to the standby disk.</p>	<p>copy-disk:dloc=XXXX:force=yes:format=yes (Where XXXX is the location of the STANDBY TDM)</p>

Procedure 19: Full Fallback using Spare E5-MASP

<p><input type="checkbox"/></p> <p><input type="checkbox"/></p>	<p>Response to the copy-disk command is displayed.</p> <p>Wait for the card reload to complete.</p> <p>If this is the second time performing this step, go to Step 49. Otherwise continue.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Copy-disk (fixed): from active (YYYY) to standby (XXXX) started. Extended processing required, please wait. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Copy-disk (fixed): from active (XXXX) to standby (XXXX) complete. Measurements may be allowed now if desired. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y 0485.0014 CARD 1115 OAMHC Card is present ;</pre>
<p><input type="checkbox"/></p>	<p>Issue the command to display card status.</p>	<p>rept-stat-card</p>
<p><input type="checkbox"/></p> <p><input type="checkbox"/></p> <p><input type="checkbox"/></p>	<p>Response to the card status command is displayed.</p> <p>Verify that the GPL versions that are displayed in the "VERSION" column are correct; see Section 1.3.</p> <p>Record the location of the Standby MASP:</p> <p>MASP _____</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y rept-stat-card Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y CARD VERSION TYPE APPL EST SST AST 1101 XXX-XXX-XXX DSM SCCPHC IS-NR Active ----- 1102 XXX-XXX-XXX DSM SCCPHC IS-NR Active ----- 1103 XXX-XXX-XXX TSM GLSHC IS-NR Active ----- 1104 XXX-XXX-XXX TSM GLSHC IS-NR Active ----- 1105 XXX-XXX-XXX LIMDS0 SS7ML IS-NR Active ----- 1111 XXX-XXX-XXX IPSM IPSHC IS-NR Active ----- 1113 XXX-XXX-XXX E5MCAP OAMHC IS-NR Active ----- 1114 ----- E5TDM ----- IS-NR Active ----- 1115 XXX-XXX-XXX E5MCAP OAMHC IS-NR Standby ----- 1116 ----- E5TDM ----- IS-NR Active ----- 1117 ----- E5MDAL ----- IS-NR Active ----- 1201 XXX-XXX-XXX LIMDS0 SS7ML IS-NR Active ----- 1202 XXX-XXX-XXX LIMDS0 SS7ML IS-NR Active ----- 1203 XXX-XXX-XXX DCM IPLHC IS-NR Active ----- 1204 XXX-XXX-XXX DCM IPLHC IS-NR Active ----- 1211 XXX-XXX-XXX DCM IPGHC IS-NR Active ----- 1218 XXX-XXX-XXX TSM GLSHC IS-NR Active ----- Command Completed. ;</pre>
<p><input type="checkbox"/></p>	<p>Inhibit the standby MASP.</p>	<p>inh-card:loc=XXXX</p> <p>(Where XXXX is location of standby MASP)</p>
<p><input type="checkbox"/></p>	<p>Response to the command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Card has been inhibited. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Command Completed. ;</pre>
<p><input type="checkbox"/></p>	<p>Replace the standby E5-MASP with the E5-MASP removed in step 5.</p>	<p><input type="checkbox"/> Slide the MASP H/S switch (SW3) on the standby MASP up to the unlocked position (Wait for all drive LEDs to transition to a steady blue).</p> <p><input type="checkbox"/> Remove the standby E5-MASP card.</p> <p><input type="checkbox"/> Insert the spare E5-MASP card.</p> <p><input type="checkbox"/> Slide the MASP H/S switch (SW3) on the new standby MASP down to the locked position (Wait for the MASP H/S LED to transition from blinking blue to off and the MASP to come up in standby mode).</p> <p>Note: UAMs are generated during this step. An audible alarm is generated. Wait for the new standby E5-MASP to come up in standby mode and system returns to duplex mode.</p>
<p><input type="checkbox"/></p>	<p>Insert the source-release media into the system.</p>	<p>Insert an USB drive in the standby E5-MCAPs.</p> <p>Once inserted, allow time for the source-release RMD to be detected by the system</p>
<p><input type="checkbox"/></p>	<p>Repeat steps 23 - 41.</p>	<p>After completing Step 41 the second time, continue to Step 49.</p>

Procedure 19: Full Fallback using Spare E5-MASP

<p>49</p> <input type="checkbox"/>	<p>If steps 18 & 19 were executed, issue the command to turn the measurements collection on.</p>	<p>chg-meas:collect=on</p>
<p>50</p> <input type="checkbox"/>	<p>Response to change measurement command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y chg-meas:collect=on Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y CHG-MEAS: MASP A - COMPLTD ;</pre>
<p>51</p> <input type="checkbox"/>	<p>Execute Procedure 18.</p>	
<p>52</p> <input type="checkbox"/>	<p>If this completes the recovery as directed by My Oracle Support, verify the system with the EAGLE health check [1]. Otherwise continue with Recovery Procedure C</p>	<p>If failure occurred prior to entering Phase 3, recovery is complete.</p>

Procedure 20: Full Fallback using Fixed Disk as OAM conversion workspace – Case 1

S T E P #	<p>Perform the recovery procedure if directed to do so by My Oracle Support when failure occurs in Procedure 6 through Procedure 8, Step 1. Note, this procedure is done in lieu of Procedure 18 for the case where a removable disk was NOT used as the workspace for the OAM conversion.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR UPGRADE ASSISTANCE.</p>	
	<p>When directed to by My Oracle Support, execute this procedure: If failure occurred between Procedure 6 and Procedure 8, Step 1, Table 18, Item E.</p>	
1 <input type="checkbox"/>	Only perform this procedure if directed by My Oracle Support .	
2 <input type="checkbox"/>	If present, remove the target-release media from the system.	
3 <input type="checkbox"/>	Issue the command to initialize both MASP cards.	init-card:appl=oam
4 <input type="checkbox"/> <input type="checkbox"/>	<p>Response to initialize command is displayed.</p> <p>Ensure that the release shown in the banner is the source release after the MASP becomes active again.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y * 0261.0013 * CARD 111X OAMHC Card is isolated from the system ASSY SN: xxxxxxxx ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y 5001.0009 CARD 111X OAMHC MASP became active ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y 5038.0014 CARD XXXX OAMHC Card is present ASSY SN: xxxxxxxx ;</pre>
5 <input type="checkbox"/>	Execute Procedure 18.	Proceed to Recovery Procedure A to complete the recovery.

Procedure 21: Full Fallback using Fixed Disk as OAM conversion workspace – Case 2

<p>S T E P #</p>	<p>Perform the recovery procedure if directed to do so by My Oracle Support when failure occurs in Procedure 8, Step 1, Item F through Item I.</p> <p>This procedure makes the partition with the source GPLs active on the Standby TDM.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR UPGRADE ASSISTANCE.</p>
	<p>When directed to by My Oracle Support, execute this procedure: If failure occurred between Procedure 8, Step 1, Table 18, Item F and Procedure 8, Step 1, Table 18, Item I.</p>
<p>1 <input type="checkbox"/></p>	<p>Remove USB drive from system if present.</p>
<p>2 <input type="checkbox"/></p>	<p>Issue the command to display database status during upgrades.</p> <p>act-upgrade:action=dbstatus</p>
<p>3 <input type="checkbox"/></p>	<p>Response to the command is displayed.</p> <p>Look at the status field and determine the loc of the TDM marked “UPG 2”.</p> <pre> eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Upg Phase X ; DATABASE STATUS: >> NOT OK (DMS) << TDM 1114 (STDBY) TDM 1116 (ACTV) C LEVEL TIME LAST BACKUP C LEVEL TIME LAST BACKUP ----- FD BKUP Y nnnnnn - - Y nnnnnn YY-MM-DD hh:mm:ss zzz FD CRNT Y nnnnnn - - Y nnnnnn MCAP 1113 MCAP 1115 ----- RD BKUP - - - - - - - - USB BKP - - - - - - - - CARD/APPL LOC C T LEVEL TIME LAST UPDATE VERSION STATUS ----- OAM-RMV 1113 - - - - - - TDM-CRNT 1114 Y N nnnnnn YY-MM-DD hh:mm:ss ZZZ-ZZZ-ZZZ UPG 2 TDM-BKUP 1114 Y - nnnnnn YY-MM-DD hh:mm:ss ZZZ-ZZZ-ZZZ UPG 2 OAM-RMV 1115 - - - - - - OAM-USB 1115 - - - - - - TDM-CRNT 1116 Y N nnnnnn YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL TDM-BKUP 1116 Y - nnnnnn YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL INACTIVE PARTITION GROUP CARD/APPL LOC C T LEVEL TIME LAST UPDATE VERSION STATUS ----- TDM-CRNT 1114 Y - nnnnnn YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL TDM-BKUP 1114 Y - nnnnnn YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL TDM-CRNT 1116 N - 1 00-00-00 00:00:00 ZZZ-ZZZ-ZZZ NORMAL TDM-BKUP 1116 N - 1 00-00-00 00:00:00 ZZZ-ZZZ-ZZZ NORMAL </pre>
<p>4 <input type="checkbox"/></p>	<p>If the TDM marked in “UPG 2” is the active MASP continue. Otherwise go to step 9.</p>
<p>5 <input type="checkbox"/></p>	<p>Issue the command to init active location.</p> <p>init-card:loc=YYYY</p> <p>(Where YYYY is location of active MASP)</p>
<p>6 <input type="checkbox"/></p>	<p>Response to initialize command is displayed.</p> <pre> eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y * 0261.0013 * CARD XXXX OAMHC Card is isolated from the system ASSY SN: xxxxxxxx ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y 5038.0014 CARD XXXX OAMHC Card is present ASSY SN: xxxxxxxx ; </pre>
<p>7 <input type="checkbox"/></p>	<p>Issue the command to log back in to the system.</p> <p>login:uid=xxxxxx</p> <p>(Where XXXXXX is a valid login ID)</p>

Procedure 21: Full Fallback using Fixed Disk as OAM conversion workspace – Case 2

<p>8 <input type="checkbox"/></p>	<p>Response to login command is displayed. Ignore any login failure message.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y User logged in on terminal 10. ; ? Login failures since last successful LOGIN Last successful LOGIN was on port ? on ??-??-?? @ ??:?:??</pre>
<p>9 <input type="checkbox"/></p>	<p>Issue the command to display active/inactive disk partitions.</p>	<pre>send-msg:ds=1:da=h'5d:f=h'47:loc=YYYY (Where YYYY is location of active MASP)</pre>
<p>10 <input type="checkbox"/></p>	<p>Response to command. Note: Look for the command response on a terminal with all output display groups set to yes (printer/ksr terminal port specified in, Procedure 1, Step 6)</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Upgrade Phase x System Buffer sent has following attributes : Msg Length = H'0010 Dest Card = H'00fb Orig Subsys = H'0001 Dest Subsys = H'0001 Orig Appl ID = H'0030 Dest Appl ID = H'005d Func ID = H'0047 Bus/Ret/Sut = H'0002 Violation Ind = H'0000 User Message sent to location YYYY. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Upgrade Phase x ACTIVE OAM Partition Grp Info: num_group = 2 num_partitions_per_group = 2 active_partitions[] = 0 1 inactive_partitions[] = 2 3 ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Upgrade Phase x STANDBY OAM Partition Grp Info: num_group = 2 num_partitions_per_group = 2 active_partitions[] = 2 3 inactive_partitions[] = 0 1 ;</pre>
<p>11 <input type="checkbox"/></p>	<p>Issue the command to swap active/inactive disk partitions.</p>	<pre>send-msg:ds=1:da=h'5d:f=h'48:loc=YYYY (Where YYYY is location of active MASP)</pre>
<p>12 <input type="checkbox"/> <input type="checkbox"/></p>	<p>Response to command. Note: Look for the command response on a terminal with all output display groups set to yes (printer/ksr terminal port specified in Procedure 1, Step 6) Compare the values for the active_partitions and inactive_partitions with those in step 10. For the STANDBY OAM, the values for the active_partitions shown should equal those for the inactive_partitions shown in step 10, and vice-versa. For the ACTIVE OAM, both sets of values should be identical.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y System Buffer sent has following attributes : Msg Length = H'0010 Dest Card = H'00fb Orig Subsys = H'0001 Dest Subsys = H'0001 Orig Appl ID = H'0030 Dest Appl ID = H'005d Func ID = H'0048 Bus/Ret/Sut = H'0002 Violation Ind = H'0000 User Message sent to location YYYY. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Partition switch PASSED ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y ACTIVE OAM Partition Grp Info: num_group = 2 num_partitions_per_group = 2 active_partitions[] = 0 1 inactive_partitions[] = 2 3 ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y STANDBY OAM Partition Grp Info: num_group = 2 num_partitions_per_group = 2 active_partitions[] = 0 1 inactive_partitions[] = 2 3 ;</pre>
<p>13 <input type="checkbox"/></p>	<p>Inhibit the standby MASP.</p>	<pre>inh-card:loc=XXXX (Where XXXX is the location for the Standby MASP.)</pre>

Procedure 21: Full Fallback using Fixed Disk as OAM conversion workspace – Case 2

<p><input type="checkbox"/> 14</p> <p><input type="checkbox"/></p>	<p>Response to the inhibit command is displayed</p> <p>Verify UAM 514 is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Card is inhibited. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Upg Phase x ** 5045.0514 ** CARD XXXX OAMHC Standby MASP is inhibited ; Note: Wait for the card to boot and return to the IMT bus.</pre>
<p><input type="checkbox"/> 15</p>	<p>Issue the command to initialize the flash memory on the standby MASP.¹⁶</p>	<pre>init-flash:loc=appr:loc=XXXX (Where XXXX is the location for the Standby MASP.)</pre>
<p><input type="checkbox"/> 16</p> <p><input type="checkbox"/></p>	<p>Response to flash initialization is shown.</p> <p>Verify UAM 0004 is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y FLASH Memory Download for card xxxx started. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y FLASH Memory Download for card xxxx completed. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y * 8003.0004 * GPL SYSTEM BLMCAP Card is running non-activated GPL ; Note: Wait for card to boot and return to the IMT bus.</pre>
<p><input type="checkbox"/> 17</p>	<p>Issue the command to activate the flash on the standby MASP.</p>	<pre>act-flash:loc=XXXX (Where XXXX is the location for the Standby MASP.)</pre>
<p><input type="checkbox"/> 18</p>	<p>Response to the activate command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y act-flash:loc=XXXX Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y FLASH Memory Activation for card XXXX Started. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y FLASH Activation for card XXXX Completed. ;</pre>
<p><input type="checkbox"/> 19</p>	<p>Issue the command to allow card.</p>	<pre>alw-card:loc=XXXX (Where XXXX is the location for the Standby MASP.)</pre>
<p><input type="checkbox"/> 20</p>	<p>Response to the command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Card has been allowed. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Command Completed. ;</pre>
<p><input type="checkbox"/> 21</p>	<p>Determine the status of the GPLs running on the card location.</p>	<pre>rept-stat-gpl:loc=XXXX (Where XXXX is the location for the Standby MASP.)</pre>
<p><input type="checkbox"/> 22</p> <p><input type="checkbox"/></p>	<p>Response from the status command is displayed.</p> <p>Verify the standby MASP is running the upgrade source release GPLs. Verify that no “ALM” indicator is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y GPL Auditing ON ; GPL CARD RUNNING APPROVED TRIAL OAMHC 1115 134-074-000 ----- ----- BLMCAP 134-070-000 134-070-000 134-070-000 ; Command Completed.</pre>

¹⁶ The approved flash GPL is the source version.

Procedure 21: Full Fallback using Fixed Disk as OAM conversion workspace – Case 2

<p>23 <input type="checkbox"/></p>	<p>If the active MASP is not running the upgrade source release GPL continue. Otherwise go to step 37.</p>	<p>init-card:loc=XXXX (Where XXXX is location of active MASP)</p>
<p>24 <input type="checkbox"/></p>	<p>Response to initialize command is displayed.</p>	<pre>* eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y 0261.0013 * CARD XXXX OAMHC Card is isolated from the system ASSY SN: xxxxxxxx ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y 5038.0014 CARD XXXX OAMHC Card is present ASSY SN: xxxxxxxx ;</pre>
<p>25 <input type="checkbox"/></p>	<p>Issue the command to log back in to the system.</p>	<p>login:uid=XXXXXX (Where XXXXXX is a valid login ID)</p>
<p>26 <input type="checkbox"/></p>	<p>Response to login command is displayed. Ignore any login failure message.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y User logged in on terminal 10. ; ? Login failures since last successful LOGIN Last successful LOGIN was on port ? on ??-??-?? @ ??:??:??</pre>
<p>27 <input type="checkbox"/></p>	<p>Inhibit the standby MASP.</p>	<p>inh-card:loc=XXXX (Where XXXX is the location for the Standby MASP.)</p>
<p>28 <input type="checkbox"/> <input type="checkbox"/></p>	<p>Response to the inhibit command is displayed Verify UAM 514 is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y card is inhibited. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Upg Phase x ** 5045.0514 ** CARD XXXX OAMHC Standby MASP is inhibited ; Note: Wait for the card to boot and return to the IMT bus.</pre>
<p>29 <input type="checkbox"/></p>	<p>Issue the command to initialize the flash memory on the standby MASP.</p>	<p>init-flash:code=appr:loc=XXXX (Where XXXX is the location for the Standby MASP.)</p>
<p>30 <input type="checkbox"/> <input type="checkbox"/></p>	<p>Response to flash initialization is shown. Verify UAM 0004 is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y FLASH Memory Download for card xxxx started. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y FLASH Memory Download for card xxxx completed. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y * 8003.0004 * GPL SYSTEM BLMCAP Card is running non-activated GPL ; Note: Wait for card to boot and return to the IMT bus.</pre>
<p>31 <input type="checkbox"/></p>	<p>Issue the command to activate the flash on the standby MASP.</p>	<p>act-flash:loc=XXXX (Where XXXX is the location for the Standby MASP.)</p>
<p>32 <input type="checkbox"/></p>	<p>Response to the activate command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y act-flash:loc=XXXX Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y FLASH Memory Activation for card XXXX Started. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y FLASH Activation for card XXXX Completed. ;</pre>
<p>33 <input type="checkbox"/></p>	<p>Issue the command to allow card.</p>	<p>alw-card:loc=XXXX (Where XXXX is the location for the Standby MASP.)</p>
<p>34 <input type="checkbox"/></p>	<p>Response to the command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Card has been allowed. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Command Completed. ;</pre>

Procedure 21: Full Fallback using Fixed Disk as OAM conversion workspace – Case 2

<p>35 <input type="checkbox"/></p>	<p>Determine the status of the GPLs running on the card location.</p>	<p>rept-stat-gpl:loc=XXXX (Where XXXX is the location for the Standby MASP.)</p>
<p>36 <input type="checkbox"/> <input type="checkbox"/></p>	<p>Response from the status command is displayed. Verify that the standby MASP is running the upgrade source release GPLs. Verify that no “ALM” indicator is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.X.X-YY.y.y GPL Auditing ON GPL CARD RUNNING APPROVED TRIAL OAMHC 1115 134-074-000 ----- ----- BLMCAP 134-070-000 134-070-000 134-070-000 Command Completed. ;</pre>
<p>37 <input type="checkbox"/></p>	<p>Execute Procedure 18.</p>	<p>Proceed to Recovery Procedure A to complete the recovery.</p>

Procedure 22: Full Fallback using Fixed Disk as OAM conversion workspace – Case 3

<p>S T E P #</p>	<p>Perform this recovery procedure if directed to do so by My Oracle Support when failure occurs at Procedure 8, Step 1 or completion of the session. This procedure makes the partition with the source GPLs active on both TDMs. NOTE: If the database level in the target release is different from the last database level of the source release, this procedure CANNOT BE USED; contact My Oracle Support. Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number. SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR <u>UPGRADE ASSISTANCE</u>.</p>
	<p>When directed to by My Oracle Support, execute this procedure: If failure occurred between Procedure 8, Step 1, Table 18, Item J and Procedure 10 [End of Session 1].</p>
<p>1 <input type="checkbox"/></p>	<p>*** ATTENTION *** If this is an incremental upgrade (i.e. the SOURCE release equals the TARGET release, go to Procedure 4, Step 1. ***** Complete all steps from Procedure 4 to the end of Session 1 (Procedure 10). Note: When executing Procedure 4 through Procedure 10 in the recovery scenario, the terminology of source and target are reversed. Target release becomes the software load that is being recovered to (45.0.0) and the source release becomes the software load that was upgraded to (45.0.1).</p>
<p>2 <input type="checkbox"/></p>	<p>Remove USB drive from system if present.</p>
<p>3 <input type="checkbox"/></p>	<p>Issue the command to display active/inactive disk partitions. send-msg ds=1:da=h'5d:f=h'47:l=oc=YYYY (Where YYYY is location of active MASP)</p>
<p>4 <input type="checkbox"/></p>	<p>Response to command. Note: Look for the command response on a terminal with all output display groups set to yes (printer\ksr terminal port specified in Procedure 1, Step 6)</p> <pre> eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Upgrade Phase x System Buffer sent has following attributes : Msg Length = H'0010 Dest Card = H'00fb Orig Subsys = H'0001 Dest Subsys = H'0001 Orig Appl ID = H'0030 Dest Appl ID = H'005d Func ID = H'0047 Bus/Ret/Sut = H'0002 Violation Ind = H'0000 User Message sent to location XXXX. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Upgrade Phase x ACTIVE OAM Partition Grp Info: num_group = 2 num_partitions_per_group = 2 active_partitions[] = 2 3 inactive_partitions[] = 0 1 ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Upgrade Phase x STANDBY OAM Partition Grp Info: num_group = 2 num_partitions_per_group = 2 active_partitions[] = 2 3 inactive_partitions[] = 0 1 ; </pre>
<p>5 <input type="checkbox"/></p>	<p>Issue the command to swap active/inactive disk partitions. send-msg ds=1:da=h'5d:f=h'48:l=oc=YYYY (Where YYYY is location of active MASP)</p>

Procedure 22: Full Fallback using Fixed Disk as OAM conversion workspace – Case 3

<p>6</p> <p><input type="checkbox"/></p> <p><input type="checkbox"/></p>	<p>Response to command.</p> <p>Note: Look for the command response on a terminal with all output display groups set to yes (printer\ksr terminal port specified in Procedure 1, Step 6)</p> <p>Compare the values for the active_partitions and inactive_partitions with those in step 4. For the STANDBY OAM, the values for the active_partitions shown should equal those for the inactive_partitions shown in step 4, and vice-versa. For the ACTIVE OAM, both sets of values should be identical.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y System Buffer sent has following attributes : Msg Length = H'0010 Dest Card = H'00fb Orig Subsys = H'0001 Orig Appl ID = H'0030 Func ID = H'0048 Violation Ind = H'0000 User Message sent to location XXXX. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Partition switch PASSED ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y ACTIVE OAM Partition Grp Info: num_group = 2 num_partitions_per_group = 2 active_partitions[] = 2 3 inactive_partitions[] = 0 1 ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y STANDBY OAM Partition Grp Info: num_group = 2 num_partitions_per_group = 2 active_partitions[] = 0 1 inactive_partitions[] = 2 3 ;</pre>
<p>7</p> <p><input type="checkbox"/></p>	<p>Inhibit the standby MASP.</p>	<p>inh-card:loc=XXXX</p> <p>(Where XXXX is the location for the Standby MASP.)</p>
<p>8</p> <p><input type="checkbox"/></p> <p><input type="checkbox"/></p>	<p>Response to the inhibit command is displayed</p> <p>Verify UAM 514 is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Card is inhibited. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Upg Phase x ** 5045.0514 ** CARD XXXX OAMHC Standby MASP is inhibited ; Note: Wait for the card to boot and return to the IMT bus.</pre>
<p>9</p> <p><input type="checkbox"/></p>	<p>Issue the command to initialize the flash memory on the standby MASP.</p>	<p>init-flash:code=trial:loc=XXXX</p> <p>(Where XXXX is the location for the Standby MASP.)</p>
<p>10</p> <p><input type="checkbox"/></p> <p><input type="checkbox"/></p>	<p>Response to flash initialization is shown.</p> <p>Verify UAM 0004 is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y FLASH Memory Download for card xxxx started. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y FLASH Memory Download for card xxxx completed. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y * 8003.0004 * GPL SYSTEM BLMCAP Card is running non-activated GPL ; Note: Wait for card to boot and return to the IMT bus.</pre>
<p>11</p> <p><input type="checkbox"/></p>	<p>Issue the command to activate the flash on the standby MASP.</p>	<p>act-flash:loc=XXXX</p> <p>(Where XXXX is the location for the Standby MASP.)</p>
<p>12</p> <p><input type="checkbox"/></p>	<p>Response to the activate command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y act-flash:loc=XXXX Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y FLASH Memory Activation for card XXXX Started. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y FLASH Activation for card XXXX Completed. ;</pre>
<p>13</p> <p><input type="checkbox"/></p>	<p>Issue the command to allow card.</p>	<p>alw-card:loc=XXXX</p> <p>(Where XXXX is the location for the Standby MASP.)</p>

Procedure 22: Full Fallback using Fixed Disk as OAM conversion workspace – Case 3

<p><input type="checkbox"/></p> <p>14</p>	<p>Response to the command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.X.X-YY.Y.Y Card has been allowed. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.X.X-YY.Y.Y Command Completed. ;</pre>
<p><input type="checkbox"/></p> <p>15</p>	<p>Determine the status of the GPLs running on the card location.</p>	<pre>rept-stat-gpl:loc=XXXX (Where XXXX is the location for the Standby MASP.)</pre>
<p><input type="checkbox"/></p> <p>16</p>	<p>Response from the status command is displayed.</p> <p>Verify that the standby MASP is running the upgrade source release GPLs.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.X.X-YY.Y.Y GPL Auditing ON ; GPL CARD RUNNING APPROVED TRIAL OAMHC 1115 XXX-XXX-XXX ----- ----- BLMCAP XXX-XXX-XXX YYY-YYY-YYY XXX-XXX-XXX Command Completed. ;</pre>
<p><input type="checkbox"/></p> <p>17</p>	<p>Issue the command to init active location.</p>	<pre>init-card:loc=YYYY (Where YYYY is location of active MASP)</pre>
<p><input type="checkbox"/></p> <p>18</p>	<p>Response to initialize command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.X.X-YY.Y.Y * 0261.0013 * CARD XXXX OAMHC Card is isolated from the system ASSY SN: xxxxxxxx ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.X.X-YY.Y.Y 5038.0014 CARD XXXX OAMHC Card is present ASSY SN: xxxxxxxx ;</pre>
<p><input type="checkbox"/></p> <p>19</p>	<p>Issue the command to log back in to the system.</p>	<pre>login:uid=XXXXXX (Where XXXXXX is a valid login ID)</pre>
<p><input type="checkbox"/></p> <p>20</p>	<p>Response to login command is displayed.</p> <p>Ignore any login failure message.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.X.X-YY.Y.Y User logged in on terminal nn. ; ? Login failures since last successful LOGIN Last successful LOGIN was on port ? on ??-??-?? @ ??:??:??</pre>
<p><input type="checkbox"/></p> <p>21</p>	<p>Issue the command to display active/inactive disk partitions.</p>	<pre>send-msg:ds=1:da=h'5d:f=h'47:loc=XXXX (Where XXXX is location of newly active MASP)</pre>
<p><input type="checkbox"/></p> <p>22</p>	<p>Response to command.</p> <p>Note: Look for the command response on a terminal with all output display groups set to yes (printer/ksr terminal port specified in Procedure 1, Step 6)</p> <p>If the standby partition information is not displayed, wait for the standby MASP to return to service and repeat step 21.</p>	<pre>Command Accepted - Processing eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.X.X-YY.Y.Y Upgrade Phase x System Buffer sent has following attributes : Msg Length = H'0010 Dest Card = H'00fb Orig Subsys = H'0001 Dest Subsys = H'0001 Orig Appl ID = H'0030 Dest Appl ID = H'005d Func ID = H'0047 Bus/Ret/Sut = H'0002 Violation Ind = H'0000 User Message sent to location YYYY. ; eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.X.X-YY.Y.Y Upgrade Phase x ACTIVE OAM Partition Grp Info: num_group = 2 num_partitions_per_group = 2 active_partitions[] = 0 1 inactive_partitions[] = 2 3 ; eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.X.X-YY.Y.Y Upgrade Phase x STANDBY OAM Partition Grp Info: num_group = 2 num_partitions_per_group = 2 active_partitions[] = 2 3 inactive_partitions[] = 0 1 ;</pre>
<p><input type="checkbox"/></p> <p>23</p>	<p>Issue the command to swap active/inactive disk partitions.</p>	<pre>send-msg:ds=1:da=h'5d:f=h'48:loc=XXXX (Where XXXX is location of active MASP)</pre>

Procedure 22: Full Fallback using Fixed Disk as OAM conversion workspace – Case 3

<p>24</p> <p><input type="checkbox"/></p> <p><input type="checkbox"/></p>	<p>Response to command.</p> <p>Note: Look for the command response on a terminal with all output display groups set to yes (printer\ksr terminal port specified in Procedure 1, Step 6)</p> <p>Compare the values for the active_partitions and inactive_partitions with those in step 22. For the STANDBY OAM, the values for the active_partitions shown should equal those for the inactive_partitions shown in step 22, and vice-versa. For the ACTIVE OAM, both sets of values should be identical.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y System Buffer sent has following attributes : Msg Length = H'0010 Dest Card = H'00fb Orig Subsys = H'0001 Orig Appl ID = H'0030 Func ID = H'0048 Violation Ind = H'0000 User Message sent to location YYYY. ; eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Partition switch PASSED ; eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y ACTIVE OAM Partition Grp Info: num_group = 2 num_partitions_per_group = 2 active_partitions[] = 0 1 inactive_partitions[] = 2 3 ; eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y STANDBY OAM Partition Grp Info: num_group = 2 num_partitions_per_group = 2 active_partitions[] = 0 1 inactive_partitions[] = 2 3 ;</pre>
<p>25</p> <p><input type="checkbox"/></p>	<p>Inhibit the standby MASP.</p>	<p>inh-card:loc=YYYY</p> <p>(Where YYYY is the location for the Standby MASP.)</p>
<p>26</p> <p><input type="checkbox"/></p> <p><input type="checkbox"/></p>	<p>Response to the inhibit command is displayed</p> <p>Verify UAM 514 is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Card is inhibited. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Upg Phase x ** 5045.0514 ** CARD XXXX OAMHC Standby MASP is inhibited ; Note: Wait for the card to boot and return to the IMT bus.</pre>
<p>27</p> <p><input type="checkbox"/></p>	<p>Issue the command to initialize the flash memory on the standby MASP.</p>	<p>init-flash:code=appr:loc=YYYY</p> <p>(Where YYYY is the location for the Standby MASP.)</p>
<p>28</p> <p><input type="checkbox"/></p> <p><input type="checkbox"/></p>	<p>Response to flash initialization is shown.</p> <p>Verify UAM 0004 is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y FLASH Memory Download for card xxxx started. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y FLASH Memory Download for card xxxx completed. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y * 8003.0004 * GPL SYSTEM BLMCAP Card is running non-activated GPL ; Note: Wait for card to boot and return to the IMT bus.</pre>
<p>29</p> <p><input type="checkbox"/></p>	<p>Issue the command to activate the flash on the standby MASP.</p>	<p>act-flash:loc=YYYY</p> <p>(Where YYYY is the location for the Standby MASP.)</p>
<p>30</p> <p><input type="checkbox"/></p>	<p>Response to the activate command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y FLASH Memory Activation for card XXXX Started. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y FLASH Activation for card XXXX Completed. ;</pre>
<p>31</p> <p><input type="checkbox"/></p>	<p>Issue the command to allow card.</p>	<p>alw-card:loc=YYYY</p> <p>(Where YYYY is the location for the Standby MASP.)</p>

Procedure 22: Full Fallback using Fixed Disk as OAM conversion workspace – Case 3

<p>32 <input type="checkbox"/></p>	<p>Response to the command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.X.X-YY.Y.Y Card has been allowed. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.X.X-YY.Y.Y Command Completed. ;</pre>
<p>33 <input type="checkbox"/></p>	<p>Determine the status of the GPLs running on the card location.</p>	<p>rept-stat-gpl:loc=XXXX</p> <p>(Where XXXX is the location for the Standby MASP.)</p>
<p>34 <input type="checkbox"/> <input type="checkbox"/></p>	<p>Response from the retrieve command is displayed.</p> <p>Verify that the both MASP are running the upgrade source release GPLs. Verify that no “ALM” indicator is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.X.X-YY.Y.Y GPL Auditing ON GPL CARD RUNNING APPROVED TRIAL OAMHC 1115 134-074-000 ----- ----- BLMCAP 134-070-000 134-070-000 134-070-000 Command Completed. ;</pre>
<p>35 <input type="checkbox"/></p>	<p>Execute Procedure 18.</p>	<p>Proceed to Recovery Procedure A to complete the recovery.</p>

6.4 Recovery Procedure C

Procedure 23: Fall Back Procedure for Network Cards

S T E P #	This procedure captures the card and link status data required when performing a manual fallback of the network cards back to the source-release GPLs.
1 <input type="checkbox"/>	Issue the command to report card status.
2 <input type="checkbox"/> <input type="checkbox"/>	<pre> rept-stat-card eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y CARD VERSION TYPE GPL PST SST AST 1101 XXX-XXX-XXX DSM SCCPHC IS-NR Active ----- 1102 XXX-XXX-XXX DCM IPLHC IS-NR Active ----- 1103 XXX-XXX-XXX TSM GLSHC IS-NR Fault ----- 1105 XXX-XXX-XXX DCM IPGHC IS-NR Active ----- 1109 XXX-XXX-XXX HIPR HIPR IS-NR Active ----- 1110 XXX-XXX-XXX HIPR HIPR IS-NR Active ----- 1111 XXX-XXX-XXX MCPM MCPHC IS-ANR Active ----- 1113 XXX-XXX-XXX E5MCAP OAMHC IS-NR Active ----- 1114 ----- E5TDM ----- IS-NR Active ----- 1115 XXX-XXX-XXX E5MCAP OAMHC IS-NR Standby ----- 1116 ----- E5TDM ----- IS-NR Active ----- 1117 ----- E5MDAL ----- IS-NR Active ----- 1201 XXX-XXX-XXX LIMT1 SS7HC IS-NR Active ----- 1202 XXX-XXX-XXX LIMT1 SS7HC IS-NR Active ----- 1209 XXX-XXX-XXX HIPR2 HIPR2 IS-NR Active ----- 1210 XXX-XXX-XXX HIPR2 HIPR2 IS-NR Active ----- 1211 XXX-XXX-XXX DCM IPGHC IS-NR Active ----- 1217 XXX-XXX-XXX TSM GLSHC IS-NR Active ----- 1218 XXX-XXX-XXX IPSM IPSHC IS-NR Active ----- Command Completed. ; </pre> <p>Record all network card applications present for future reference within the procedure.</p>
3 <input type="checkbox"/>	<pre> rept-stat-card:appl=mcp </pre> <p>Issue the card status command.</p>
4 <input type="checkbox"/>	<pre> eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y CARD VERSION TYPE GPL PST SST AST 1111 134-064-000 MCPM MCPHC IS-NR Active ----- 1112 134-064-000 MCPM MCPHC IS-NR Active ----- Command Completed. ; </pre> <p>Response to the card status command is displayed.</p> <p>If any MCPM cards are displayed, continue to next step. Otherwise, go to Step 7.</p>
5 <input type="checkbox"/>	<p>NOTE: This command causes the MCPM card to boot with an OBIT indicating a "USER INITIATED COLD RESTART". All Measurements data not sent to an FTP server is lost. Waiting for the next scheduled Measurement FTP transfer and use of the rept-ftp-meas command to save desired measurements can minimize these losses before proceeding with this step.</p> <pre> send-msg:ds=8:da=h'17:f=22:loc=XXXX (Where XXXX is location of the MCPM cards display in previous step.) </pre> <p>Issue the send message command.</p> <p>Repeat for each MCPM card.</p>
6 <input type="checkbox"/>	<pre> eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y System Buffer sent has following attributes : Msg Length = H'0010 Dest Card = H'00f7 Orig Subsys = H'0001 Dest Subsys = H'0001 Orig Appl ID = H'004d Dest Appl ID = H'001d Func ID = H'0016 Bus/Ret/Sut = H'0002 Violation Ind = H'0000 User Message sent to location XXXX. Command Completed. ; </pre> <p>Response to the send message command is displayed.</p>

Procedure 23: Fall Back Procedure for Network Cards

<p>7 <input type="checkbox"/></p>	<p>Issue the upgrade activation command.</p>	<p>If the threshold type is set to SET in Procedure 7, Step 4 and the source release is 46.0 or higher, issue the following command:</p> <p>ACT-UPGRADE:ACTION=CONVERTSTP:SRC=FIXED</p> <p>Otherwise, issue the following command:</p> <p>ACT-UPGRADE:ACTION=CONVERTSTP:SRC=FIXED:THRES=75</p> <p>(If another thres value is to be used see recommendation #5 in section 1.6)</p>
<p>8 <input type="checkbox"/> <input type="checkbox"/></p>	<p>Response to the upgrade command is displayed.</p> <p>Completion notice of successful upgrade. If upgrade does not complete successfully, see recommendation # 7 in section 1.6</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Upg Phase 3 Hardware Validation Test Started [ASM Obsolescence Test for all applications.] [DSM Obsolescence Test for MCP application.] Hardware Validation Test Completed Successfully. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Upg Phase 3 Starting network conversion... ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Upg Phase 3 Upgrading MUX card 1109 ; Output continues until the following is displayed: eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Upg Phase 3 Command Complete : Upgrade action completed successfully ;</pre>
<p>9 <input type="checkbox"/></p>	<p>Go to Procedure 8, Step 7.</p>	<p>Complete all steps from Procedure 8, Step 7 to the end of Procedure 9.</p>

Procedure 24: Restoring Flash-Based Service Cards

S T E P #	<p>This procedure restores Service Cards that are flash based. This group includes IPS, MCP, EROUTE, VSCCP, SCCPHC, IPSHC ERTHC, and SIPHC cards.</p> <p>This procedure updates each card with the source release GPLs.</p>	
1 <input type="checkbox"/>	Issue the command to display the GPL status.	<pre>rept-stat-gpl:gpl=YYYY (Where YYYY is one of the Flash-Based service card types listed above.)</pre>
2 <input type="checkbox"/>	<p>Response to the command is displayed.</p> <p>Record the CARD locations for all cards that have alarms:</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y rept-stat-gpl:gpl=YYYY Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y GPL Auditing ON APPL CARD RUNNING APPROVED TRIAL YYYYY 1101 XXX-XXX-XXX ALM XXX-XXX-XXX XXX-XXX-XXX YYYYY 1103 XXX-XXX-XXX ALM XXX-XXX-XXX XXX-XXX-XXX Command Completed. ;</pre>
3 <input type="checkbox"/>	Issue the command to inhibit the card if the card is provisioned.	<pre>inh-card:loc=XXXX (Where XXXX is the card location of the cards determined in Step 2)</pre>
4 <input type="checkbox"/>	<p>Response to the inhibit command is displayed.</p> <p>Wait for the "Command completed" response before proceeding.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Card has been inhibited. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Command Completed. ;</pre>
5 <input type="checkbox"/>	Issue the command to initialize the flash memory.	<pre>flash-card:code=appr:force=yes:loc=XXXX</pre> <p>NOTE: this command causes the card to boot.</p>
6 <input type="checkbox"/>	<p>Response to the flash card command is displayed.</p> <p>Wait for command complete to indicate that the card is finished loading before proceeding.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y flash-card:code=appr:force=yes:loc=XXXX Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Command Completed. ;</pre>
7 <input type="checkbox"/>	Issue the command to allow the card ¹⁷ if the card is provisioned.	<pre>alw-card:loc=XXXX (Where XXXX is the card location of the cards determined in Step2)</pre> <p>OR</p> <pre>alw-card:loc=XXXX:data=persist (Where XXXX is the location of an SCCP card determined in Step2)</pre>
8 <input type="checkbox"/>	<p>Response to the allow command is displayed.¹⁸</p> <p>Wait for the card to finish loading before proceeding (approximately 30 seconds).</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y alw-card:loc=1201 Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Card has been allowed. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Command Completed. ;</pre>

¹⁷ Specifying the DATA=PERSIST parameter for SCCP application cards allows for warm restart if possible.

Procedure 24: Restoring Flash-Based Service Cards

<p>9 <input type="checkbox"/></p>	<p>Repeat Steps 3 – 8 for each card in the current group that has an alarm.</p>	
<p>10 <input type="checkbox"/></p>	<p>Repeat steps 1-9 for each group of cards (VSCCP, ISP, MCP, EROUTE, SCCPHC, IPSHC, ERTHC, and SIPHC)</p>	
<p>11 <input type="checkbox"/></p>	<p>Issue the command to display the card status.</p>	<p>rept-stat-card</p>
<p>12 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/></p>	<p>Response to the command is displayed.</p> <p>Verify that all Flash-Based Service cards are IS-NR and are running the Source-Release GPL versions, as per your reference list of GPLs</p> <p>For any such card that is not IS-NR or running the correct GPL, repeat Steps 3-4.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y rept-stat-card Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y CARD VERSION TYPE GPL PST SST AST 1101 XXX-XXX-XXX DSM VS CCP IS-NR Active ----- 1102 XXX-XXX-XXX DSM VS CCP IS-NR Active ----- 1103 XXX-XXX-XXX TSM GLSHC IS-NR Active ----- 1104 XXX-XXX-XXX TSM GLSHC IS-NR Active ----- 1105 XXX-XXX-XXX LIMDS0 SS7ML IS-NR Active ----- 1109 XXX-XXX-XXX HIPR HIPR IS-NR Active ----- 1110 XXX-XXX-XXX HIPR HIPR IS-NR Active ----- 1111 XXX-XXX-XXX LIMT1 SS7HC IS-NR Active ----- 1113 XXX-XXX-XXX E5MCAP OAMHC IS-NR Active ----- 1114 ----- E5TDM ----- IS-NR Active ----- 1115 XXX-XXX-XXX E5MCAP OAMHC IS-NR Standby ----- 1116 ----- E5TDM ----- IS-NR Active ----- 1117 ----- E5MDAL ----- IS-NR Active ----- 1201 XXX-XXX-XXX LIMDS0 SS7ML IS-NR Active ----- 1202 XXX-XXX-XXX LIMDS0 SS7ML IS-NR Active ----- 1203 XXX-XXX-XXX LIMDS0 SS7ML IS-NR Active ----- 1204 XXX-XXX-XXX LIMDS0 SS7ML IS-NR Active ----- Command Completed. ;</pre>

¹⁸ If card is MCPM, it may boot with an Obit for Module EMM_MCP.C Class 0001. This is expected behavior and is not service affecting.

Procedure 25: Restoring Flash-Based Link Cards

S T E P #	<p>Link cards include ATMANSI, IPLIM, IPLIMI, SS7IPGW, SS7ML (MPL/MIM/MPLT), IPGWI, ATMITU, VXWSLAN, SS7HC, SS7EPM, IPLHC, IPGHC, ATMHC and SLANHC cards.</p> <p>This procedure updates each card with the source release GPLs.</p> <p>Note: Steps 3 through 8 are to be repeated for EACH Link card in the system.</p>
<input type="checkbox"/>	<p>Issue the command to display the GPL status.</p>
<p>rept-stat-gpl:gp1=YYYY</p> <p>(Where YYYY is one of the Flash-Based Link card types listed above.)</p>	
<input type="checkbox"/>	<p>Response to the command is displayed.</p> <p>Record the CARD locations for all cards which have alarms:</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p>
<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y rept-stat-gpl:gp1=YYYY Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y GPL Auditing ON APPL CARD RUNNING APPROVED TRIAL XXXXXXXX 1201 XXX-XXX-XXX ALM XXX-XXX-XXX XXX-XXX-XXX XXXXXXXX 1202 XXX-XXX-XXX ALM XXX-XXX-XXX XXX-XXX-XXX XXXXXXXX 1205 XXX-XXX-XXX ALM XXX-XXX-XXX XXX-XXX-XXX XXXXXXXX 1207 XXX-XXX-XXX ALM XXX-XXX-XXX XXX-XXX-XXX XXXXXXXX 1209 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXXXXXXX 1211 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX Command Completed. ;</pre>	
<input type="checkbox"/>	<p>Issue command to display provisioned links.</p>
<p>rept-stat-card:loc=XXXX</p> <p>(Where XXXX is a card in alarm from Step 2.)</p>	
<input type="checkbox"/>	<p>Response displayed.</p>
<input type="checkbox"/>	<p>Note which links are IS-NR for this card.</p>
<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y rept-stat-card:loc=XXXX Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y CARD VERSION TYPE APPL PST SST AST XXXX XXX-XXX-XXX XXXXXX XXXXXX IS-NR Active ----- ALARM STATUS = * 0021 clock A for card failed, Clock B normal XXXXXXXX GPL version = XXX-XXX-XXX IMT BUS A = Conn IMT BUS B = Conn SLK A PST = IS-NR LS=XXXX CLLI=----- SLK B PST = IS-NR LS=XXXX CLLI=----- SLK A1 PST = OOS-MT LS=XXXX CLLI=----- SLK B1 PST = IS-NR LS=XXXX CLLI=----- SLK A2 PST = IS-NR LS=XXXX CLLI=----- SLK B2 PST = IS-NR LS=XXXX CLLI=----- SLK A3 PST = IS-NR LS=XXXX CLLI=----- SLK B3 PST = IS-NR LS=XXXX CLLI=----- Command Completed. ;</pre>	
<input type="checkbox"/>	<p>Issue the command to initialize the flash memory.</p>
<p>flash-card:code=appr:force=yes:loc=XXXX</p> <p>NOTE: this command causes the card to boot.</p>	
<input type="checkbox"/>	<p>Response to the flash card command is displayed.</p>
<input type="checkbox"/>	<p>Wait for command complete to indicate that the card is finished loading before proceeding.</p>
<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y flash-card:code=appr:force=yes:loc=XXXX Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Command Completed. ;</pre>	
7	<p>Issue command to display</p>
<p>rept-stat-card:loc=XXXX</p>	

Procedure 25: Restoring Flash-Based Link Cards

<input type="checkbox"/>	provisioned links.	
<input type="checkbox"/>	Response displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y rept-stat-card:loc=XXXX Command entered at terminal #10. ;</pre>
<input type="checkbox"/>	Verify that the links that were IS-NR in Step 4 are IS-NR now.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y CARD VERSION TYPE APPL PST SST AST XXXX XXX-XXX-XXX XXXXXX XXXXXX IS-NR Active XXXXX ALARM STATUS = ** 0228 REPT-E1F:FAC-E1 Port 1 LOS failure IMT VERSION = XXX-XXX-XXX PROM VERSION = XXX-XXX-XXX IMT BUS A = Conn IMT BUS B = Conn SLK A PST = IS-NR LS=XXXX CLLI=----- SLK B PST = OOS-MT LS=XXXX CLLI=----- Command Completed. ;</pre>
<input type="checkbox"/>	Repeat Steps 3 - 8 for each card in the group from Step 2 that has an alarm.	
<input type="checkbox"/>	Repeat Steps 1-9 for each Flash-Based Link card group (Refer to 1.3 Software Release Numbering to see list of GPLs.)	
<input type="checkbox"/>	Issue the command to display the GPL status.	rept-stat-card
<input type="checkbox"/>	Response to the command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y rept-stat-card Command entered at terminal #10. ;</pre>
<input type="checkbox"/>	Verify that all Flash-Based Link cards are IS-NR and are running the Source-Release GPL versions, as per your reference list of GPLs	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y CARD VERSION TYPE APPL EST SST AST 1101 XXX-XXX-XXX DSM SCCPHC IS-NR Active ----- 1102 XXX-XXX-XXX DSM SCCPHC IS-NR Active ----- 1103 XXX-XXX-XXX TSM GLSHC IS-NR Active ----- 1104 XXX-XXX-XXX TSM GLSHC IS-NR Active ----- 1105 XXX-XXX-XXX DCM IPGHC IS-NR Active ----- 1111 XXX-XXX-XXX IPSM IPSHC IS-NR Active ----- 1113 XXX-XXX-XXX E5MCAP OAMHC IS-NR Active ----- 1114 ----- E5TDM ----- IS-NR Active ----- 1115 XXX-XXX-XXX E5MCAP OAMHC IS-NR Standby ----- 1116 ----- E5TDM ----- IS-NR Active ----- 1117 ----- E5MDAL ----- IS-NR Active ----- 1201 XXX-XXX-XXX LIMDS0 SS7ML IS-NR Active ----- 1202 XXX-XXX-XXX LIMDS0 SS7ML IS-NR Active ----- 1203 XXX-XXX-XXX LIMATM ATMANSI IS-NR Active ----- 1204 XXX-XXX-XXX IPSM IPSHC IS-NR Active ----- Command Completed. ;</pre>
<input type="checkbox"/>	For any card that is not IS-NR or running the correct GPL, repeat Steps 3-8.	

Procedure 26: Restoring Mux Cards

S T E P #	This procedure updates each card with the source release GPLs. Mux cards include HMUX, HIPR, and HIPR2 cards, which run BPHMUX, HIPR, and HIPR2 GPLs respectively.
1	Issue the card status command to identify the MUX cards in the system.
	rept-stat-gpl:gp1=YYYY (Where YYYY is one of the Flash-Based Mux card types listed above.)

Procedure 26: Restoring Mux Cards

<p>2</p> <p><input type="checkbox"/></p>	<p>Response to the command is displayed.</p> <p>Record the CARD locations for all Mux cards in the system:</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y rept-stat-gpl:gpl=YYYY Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y GPL Auditing ON APPL CARD RUNNING APPROVED TRIAL YYYY XX09 XXX-XXX-XXX ALM XXX-XXX-XXX XXX-XXX-XXX YYYY XX10 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX YYYY XX09 XXX-XXX-XXX ALM XXX-XXX-XXX XXX-XXX-XXX YYYY XX10 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX YYYY XX09 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX YYYY XX10 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX YYYY XX09 XXX-XXX-XXX ALM XXX-XXX-XXX XXX-XXX-XXX YYYY XX10 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX Command Completed. ;</pre>
<p>3</p> <p><input type="checkbox"/></p>	<p>Enter the command to initialize the FLASH on the next Mux card on the current bus.</p>	<p>init-flash:loc=XXZZ:code=appr (Where XX = is a shelf number and, ZZ depends on which bus is being flashed. 09 is bus A; 10 is bus B.)</p>
<p>4</p> <p><input type="checkbox"/></p>	<p>Response to the flash initialization is shown.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y init-flash:loc=XX09:code=appr Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y FLASH Memory Download for card XXZZ Started. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y FLASH Memory Download for card XXZZ Completed. ;</pre>
<p>5</p> <p><input type="checkbox"/></p>	<p>Repeat steps 1-4 for each Mux card type on the current bus.</p>	<p>NOTE: Steps 1-4 must be performed for all MUX card types on one bus before performing these steps for any MUX card types on the other bus.</p>
<p>6</p> <p><input type="checkbox"/></p>	<p>Enter the command to initialize the current bus.</p>	<p>init-mux:bus=x¹⁹ (Where x = A or B, depending on current bus: xx09 is bus A; xx10 is bus B.)</p>
<p>7</p> <p><input type="checkbox"/></p>	<p>Response to the initialization command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y init-mux:bus=a Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y 5080.0014 CARD XXZZ YYYY Card is present ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y 5081.0014 CARD XXZZ YYYY Card is present ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y 5082.0004 * GPL SYSTEM YYYY Card is running non-activated GPL</pre>
<p>8</p> <p><input type="checkbox"/></p>	<p>Issue the command to activate the flash on the next MUX card on the current bus.</p>	<p>act-flash:loc=XXZZ (Where XX = is a shelf number and, ZZ depends on which bus is being flashed. 09 is bus A; 10 is bus B.)</p>
<p>9</p> <p><input type="checkbox"/></p>	<p>Response to the activate command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y act-flash:loc=XXZZ Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y FLASH Memory Activation for card XXZZ Started. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y FLASH Activation for card XXZZ Completed. ;</pre>

¹⁹ Warning: Do not use the FORCE= parameter. Use of this parameter may result in network outage. Analysis of the alternate bus is required.

Procedure 26: Restoring Mux Cards

<p>10 <input type="checkbox"/></p>	<p>Repeat steps 8-9 for each MUX card on the current bus (A or B.)</p>	
<p>11 <input type="checkbox"/></p>	<p>Repeat steps 3-10 for the second bus (A or B.)</p>	
<p>12 <input type="checkbox"/></p>	<p>Issue the command to display the MUX card GPL status.</p>	<p>rept-stat-gp1:gp1=YYYY (Where YYYY is bphmux for HMUX cards, hipr for HIPR cards, or hipr2 for HIPR2 cards.)</p>
<p>13 <input type="checkbox"/></p>	<p>Verify that all MUX card types are running the approved GPL.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y rept-stat-gp1:gp1=YYYY Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y GPL Auditing ON APPL CARD RUNNING APPROVED TRIAL YYYY XX09 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX YYYY XX10 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX YYYY XX09 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX YYYY XX10 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX YYYY XX09 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX YYYY XX10 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX Command Completed. ;</pre>
<p>14 <input type="checkbox"/></p>	<p>Repeat steps 12-13 for all MUX card types.</p>	

Appendix A. Upgrading flash-based GPL on non-in-service and unprovisioned network cards.

Procedure 27: Flashing Inactive Cards

S T E P #		
1 <input type="checkbox"/>	Issue the command to display the GPL status.	rept-stat-gpl:gp1=XXXX (Where XXXX is the GPL listed in the header of the procedure.)
2 <input type="checkbox"/> <input type="checkbox"/>	Response to the command is displayed. Record any card which shows an alarm: _____ _____ _____	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y rept-stat-gpl:gp1=XXXX Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y GPL Auditing ON APPL CARD RUNNING APPROVED TRIAL XXXXXX 1101 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXXXXX 1103 XXX-XXX-XXX XXX-XXX-XXX XXX-XXX-XXX XXXXXX 1111 XXX-XXX-XXX ALM XXX-XXX-XXX Command Completed. ;</pre>
3 <input type="checkbox"/>	Issue the status command for specific card	rept-stat-card:loc=XXXX (Where XXXX is the card location recorded in the previous step.)
4 <input type="checkbox"/>	Response to the command is displayed. If the PST for the card is OOS-MT-DSBLD or the command is rejected with MTT error E2144 ²⁰ , go to step 7.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y CARD VERSION TYPE APPL PST SST AST 1111 ----- DSM VS CCP OOS-MT-DSBLD Manual --- ALARM STATUS = No Alarms. BPDCM GPL version = 002-115-000 IMT BUS A = ----- IMT BUS B = ----- SCCP % OCCUP = 0% Command Completed.</pre>
5 <input type="checkbox"/>	Issue the command to inhibit card.	inh-card:loc=XXXX
6 <input type="checkbox"/>	Response to the command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Card has been inhibited. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Command Completed. ;</pre>
7 <input type="checkbox"/>	Issue the command to flash all GPLs on the card.	flash-card:code=appr:loc=XXXX NOTE: this command causes the card to boot.
8 <input type="checkbox"/>	Response to the flash command is displayed. Wait for the card to finish loading before proceeding.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y flash-card:code=appr:loc=XXXX Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Command Completed. ;</pre>

²⁰ E2144 Cmd Rej: Location invalid for hardware configuration

Procedure 27: Flashing Inactive Cards

9 <input type="checkbox"/>	If steps 5 & 6 were executed, issue the command to allow card.	<code>a1w-card:loc=XXXX</code>
10 <input type="checkbox"/>	Response to the command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Card has been allowed. ; eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Command Completed. ;</pre>
11 <input type="checkbox"/>	Repeat Steps 3 – 10 for all cards recorded in step 2.	
12 <input type="checkbox"/>	Repeat Steps 1 – 11 for each group of Flash-Based cards (see section 1.3.)	

Appendix B. Preparations for Upgrade Execution

B.1 Target Release Software Download

The following procedure is a reference for the commands that will download an EAGLE software release to the inactive partition group of the TDM from either a remote FTP server or from the thumb drive containing the upgrade target release for the E5-MASP.

The following items are required before the release can be downloaded to the EAGLE from a FTP server:

- E5-IPSM or E5-ENET-B card running IPS application defined, configured, and IS-NR
- DIST application FTP server provisioned

Procedure 28: Download Target Software Release and Create USB Upgrade Media

S T E P #	<p>This procedure downloads the target software release and creates the USB upgrade media using a Windows PC.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR UPGRADE ASSISTANCE.</p>	
1 <input type="checkbox"/>	<p>Using a PC running Windows 7 or later, download the target EAGLE Release from the Oracle Software Delivery Cloud (OSDC) to a local directory.</p>	<ul style="list-style-type: none"> • Go to http://edelivery.oracle.com • Sign In • Search for the target EAGLE software release • Accept the Oracle Standard Terms and Restrictions • Click on the link to the zip file for the target EAGLE software release • Save the zip file to a local directory, for example C:\Users\Admin\Desktop\uusb_media • Unzip the Vxxxxxx-01.zip file that was downloaded to the same local directory. • This will produce a <eagle target software release number>.exe file.
2 <input type="checkbox"/>	<p>Open a command window by going to Start and typing cmd.exe in the search box, then Change Directory to the path of the local directory.</p>	<pre>C:\Users\Admin>cd Desktop/uusb_media C:\Users\Admin\Desktop\uusb_media></pre>
3 <input type="checkbox"/>	<p>Extract the downloaded release in the local directory by entering the name of the .exe file as seen in step 1 and verify that the directory contains the following files: the target release file 46.xx.xx.xx.xx-6X.yy.yy.tar.gz, uusb.clf, mkdosfs.exe, pvu.exe, uusb.exe.</p>	<pre>C:\Users\Admin\Desktop\uusb_media><eagle target software release number> 7-Zip SFX 9.20 Copyright (c) 1999-2010 Igor Pavlov 2010-11-18 Processing archive: C:\Users\Admin\Desktop\uusb_media\46.3.0.0-68.12.0.e Extracting 46.3.0.0-68.12.0.tar.gz Extracting uusb.clf Extracting mkdosfs.exe Extracting pvu.exe Extracting uusb.exe Everything is Ok</pre>
4 <input type="checkbox"/>	<p>If the target release is 46.3.0.0.0 or later and you need to create USB Upgrade Media, continue with the next step; otherwise stop.</p>	

Procedure 28: Download Target Software Release and Create USB Upgrade Media

<p>5 <input type="checkbox"/></p>	<p>Insert EAGLE USB media into a PC USB port.</p>	
<p>6 <input type="checkbox"/></p>	<p>Goto Start -> Computer and wait for USB drive to be detected. Note its drive letter.</p>	
<p>7 <input type="checkbox"/></p>	<p>Enter usb command with the release filename and drive of the USB media, where 46.xx.xx.xx-68.yy.yy.tar.gz is the name of the release file in the directory from step 3 and E: is the USB media drive letter from above step 6.</p>	<pre>C:\Users\Admin\Desktop\usb_media>usb.exe 46.xx.xx.xx-68.yy.yy.tar.gz e: Copyright (c) 1993, 2014, Oracle and/or its affiliates. All rights reserved. Upgrade Media Creator Utility v1_1_0 2016:02:23 15:30:04 Checking whether Disk is present or not: (e:) 2016:02:23 15:30:04 Disk is present in Drive: (e:) 2016:02:23 15:30:04 Start Building 2016:02:23 15:30:04 Setting drive status: Busy 2016:02:23 15:30:04 Creating Partition 2016:02:23 15:30:04 Partitioning Drive: \\.\PHYSICALDRIVE1 , REMOVABLE, USB 2016:02:23 15:30:04 Drive \\.\PHYSICALDRIVE1 . Prepared partitions 2016:02:23 15:30:04 Formatting Partitions: e: , 32 , 1 mkdosfs.exe 2.11 (12 Mar 2005) Win32 port by Jens-Uwe Mager <jum@anubis.han.de> mkdosfs.exe: unable to lock \\.\e: 2016:02:23 15:30:04 Formatted drive e: UPGRADEUSB DISK 2016:02:23 15:30:04 Copying File pvu.exe 2016:02:23 15:30:05 pvu.exe file successfully copied to Drive e: 2016:02:23 15:30:05 Copying File usb.clf 2016:02:23 15:30:05 usb.clf file successfully copied to Drive e: 2016:02:23 15:30:05 Copying File 46.3.0.0-68.12.0.tar.gz 2016:02:23 15:30:16 46.3.0.0-68.12.0.tar.gz file successfully copied to Dr e: 2016:02:23 15:30:16 Validating Disk..... 2016:02:23 15:30:16 Validation Process Completed: e: 2016:02:23 15:30:16 Setting drive status: Ready</pre>
<p>8 <input type="checkbox"/></p>	<p>Close the Command window and directory folder, properly eject the USB media and remove it from the PC. The USB media is now ready to use for EAGLE upgrade.</p>	

Procedure 29: Download Target Release to Inactive Partition

<p>S T E P #</p>	<p>This procedure downloads the target release to inactive partition of the TDMs. Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number. SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR <u>UPGRADE ASSISTANCE</u>.</p>	
<p>1 <input type="checkbox"/></p>	<p>Remove the thumb drives from the E5-MASPs.</p>	
<p>2 <input type="checkbox"/></p>	<p>If downloading the upgrade target release from an FTP server, continue, otherwise go to step 5.</p>	
<p>3 <input type="checkbox"/></p>	<p>Issue the command to display the status of the IPSM cards.</p>	<p>rept-stat-card:appl=ips</p>
<p>4 <input type="checkbox"/> <input type="checkbox"/></p>	<p>Response from the command is displayed. Verify there is an IPSM card running the IPSHC gpl and that the card is IS-NR. If no such card present in the system this procedure cannot be executed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y CARD VERSION TYPE GPL PST SST AST 1101 XXX-XXX-XXX IPSM IPSC IS-NR Active ---- ;</pre>
<p>5 <input type="checkbox"/></p>	<p>Issue the command to display database status of both TDM partitions.</p>	<p>act-upgrade:action=dbstatus</p>
<p>6 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/></p>	<p>Response to the command is displayed. Record the card locations of the MASPs: Act MASP _____ Stby MASP _____ Verify if either of the inactive partitions has not been formatted. Mark below. Example shows that inactive partition of 1116 not formatted. If a database LEVEL, VERSION or STATUS is displayed the inactive partition has been formatted. Disk formatted.</p> <p>1114 _____ 1116 _____</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y Upg Phase x DATABASE STATUS: >> OK << TDM 1114 (STDBY) TDM 1116 (ACTV) C LEVEL TIME LAST BACKUP C LEVEL TIME LAST BACKUP ----- FD BKUP Y XXX YY-MM-DD hh:mm:ss TTTT Y XXX YY-MM-DD hh:mm:ss TTTT FD CRNT Y XXX YY-MM-DD hh:mm:ss TTTT Y XXX YY-MM-DD hh:mm:ss TTTT MCAP 1113 MCAP 1115 ----- RD BKUP - - - - - - - - USB BKP - - - - - - - - CARD/APPL LOC C T LEVEL TIME LAST UPDATE VERSION STATUS ----- OAM-RMV 1113 - - - - - - - TDM-CRNT 1114 Y N XXX YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL TDM-BKUP 1114 Y - XXX YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL OAM-RMV 1115 - - - - - - - OAM-USB 1115 - - - - - - - TDM-CRNT 1116 Y N XXX YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL TDM-BKUP 1116 Y - XXX YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL INACTIVE PARTITION GROUP CARD/APPL LOC C T LEVEL TIME LAST UPDATE VERSION STATUS ----- TDM-CRNT 1114 Y - ZZZ YY-MM-DD hh:mm:ss ZZZ-ZZZ-ZZZ UPG 3 TDM-BKUP 1114 Y - ZZZ YY-MM-DD hh:mm:ss ZZZ-ZZZ-ZZZ UPG 3 TDM-CRNT 1116 - - - - - - - TDM-BKUP 1116 - - - - - - - ;</pre>

Procedure 29: Download Target Release to Inactive Partition

<p>7 <input type="checkbox"/></p>	<p>If either of the inactive partitions has not been formatted continue. If the target release is 46.2 or higher, continue. Otherwise go to Step 30.</p>	
<p>8 <input type="checkbox"/></p>	<p>Issue the command to retrieve measurement setup.</p>	<p>rtrv-meas-sched</p>
<p>9 <input type="checkbox"/></p>	<p>Response to retrieve command is displayed. Record if collection is on or off: _____ If COLLECT=ON, continue to next step. Otherwise, go to Step 12.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y COLLECT = off SYSTOT-STP = (off) SYSTOT-TT = (off) SYSTOT-STPLAN = (off) COMP-LNKSET = (off) COMP-LINK = (off) MTCB-STP = (on) MTCB-LINK = (on) MTCB-STPLAN = (on) MTCB-LNKSET = (on) ;</pre>
<p>10 <input type="checkbox"/></p>	<p>Issue the command to turn off measurement collection.²¹</p>	<p>chg-meas:collect=off</p>
<p>11 <input type="checkbox"/></p>	<p>Response to the change command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y CHG-MEAS: MASP A - COMPLTD ;</pre>
<p>12 <input type="checkbox"/></p>	<p>Issue the command to display security log status.</p>	<p>rept-stat-seclog</p>
<p>13 <input type="checkbox"/> <input type="checkbox"/></p>	<p>Response to the command is displayed. If the ENTRIES column displays any value other than 0 for the Standby ROLE, proceed to the next step. Otherwise, go to step 20</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y rept-stat-seclog Command entered at terminal #10. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y -- SINCE LAST UPLOAD -- LOC ROLE ENTRIES %FULL OFLO FAIL OLDEST NEWEST LAST RECORD RECORD UPLOAD 1114 Active 19 1 No No 99-01-01 99-01-01 00-00-00 1116 Standby 0 0 No No 99-01-01 99-01-01 99-01-01 13:43:37 14:08:12 00:00:00 13:39:39 13:43:10 14:07:59 ;</pre>
<p>14 <input type="checkbox"/></p>	<p>Issue the command to copy the security log from the standby disk.</p>	<p>copy-secu log:slog=stb:dfile=upg.appB</p>
<p>15 <input type="checkbox"/> <input type="checkbox"/></p>	<p>Response to the copy security log command is displayed. If this command fails, proceed to next step. Otherwise, go to Step 20.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Security log on TDM 111X copied to file upg.appB on TDM 111Y ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y 0468.0177 SECULOG 111X Security log exception cleared ;</pre>
<p>16 <input type="checkbox"/></p>	<p>Issue the command to display the FTA directory.</p>	<p>disp-fta-dir</p>

²¹ If executed, this step causes the database level to increment.

Procedure 29: Download Target Release to Inactive Partition

<input type="checkbox"/> <input type="checkbox"/>	<p>Response to the command is displayed.</p> <p>If there are any files that need to be saved, they need to be removed via a file transfer.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y File Transfer Area Directory of fixed disk 1114 FILENAME LENGTH LAST MODIFIED LBA YYMMDDS.log 2560256 99-01-03 10:18:44 388769 YYMMDDA.log 2560256 99-01-03 10:19:20 393770 m60_lnp.csv 0 99-01-03 13:10:38 398771 3 File(s) 21093376 bytes free ;</pre>
<input type="checkbox"/>	<p>Issue the command to delete ALL files in the transfer area.</p>	<pre>dlt-fta:all=yes</pre>
<input type="checkbox"/>	<p>Response to the delete command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y dlt-fta:all=yes:loc=XXXX Command entered at terminal #10. ;</pre>
<input type="checkbox"/>	<p>Issue the command to format the inactive partition of the standby MASP.</p>	<pre>format-disk:prtngpr=inactive:type=fixed:force=yes:low=no</pre>
<input type="checkbox"/>	<p>Response from the format disk command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Format-disk of system fixed disk started. Extended processing required, please wait. eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Format-disk of system fixed disk complete. ;</pre>
<input type="checkbox"/>	<p>Issue the command to display database status of both TDM partitions.</p>	<pre>act-upgrade:action=dbstatus</pre>
<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<p>Response to the command is displayed.</p> <p>Verify the inactive partition of the standby has been formatted. And the active partition is valid.</p> <p>If a database LEVEL, VERSION or STATUS is displayed the inactive partition has been formatted.</p> <p>If the database LEVEL of the active partition of the active and standby are not the same stop the procedure and contact My Oracle Support [see Appendix F.]</p>	<pre>eaglestp YY-MM-DD hh:mm:ss EST PPP XX.x.x-YY.y.y DATABASE STATUS: >> OK << TDM 1114 (STDBY) TDM 1116 (ACTV) C LEVEL TIME LAST BACKUP C LEVEL TIME LAST BACKUP ----- FD BKUP Y XXX YY-MM-DD hh:mm:ss TTTT Y XXX YY-MM-DD hh:mm:ss TTTT FD CRNT Y XXX YY-MM-DD hh:mm:ss TTTT Y XXX YY-MM-DD hh:mm:ss TTTT MCAP 1113 MCAP 1115 ----- RD BKUP - - - - - - - - USB BKP - - - - - - - - CARD/APPL LOC C T LEVEL TIME LAST UPDATE VERSION STATUS ----- OAM-RMV 1113 - - - - - - - TDM-CRNT 1114 Y N XXX YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL TDM-BKUP 1114 Y - XXX YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL OAM-RMV 1115 - - - - - - OAM-USB 1115 - - - - - - TDM-CRNT 1116 Y N XXX YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL TDM-BKUP 1116 Y - XXX YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL INACTIVE PARTITION GROUP CARD/APPL LOC C T LEVEL TIME LAST UPDATE VERSION STATUS ----- TDM-CRNT 1114 N - 1 YY-MM-DD hh:mm:ss ZZZ-ZZZ-ZZZ NORMAL TDM-BKUP 1114 N - 1 YY-MM-DD hh:mm:ss ZZZ-ZZZ-ZZZ NORMAL TDM-CRNT 1116 - - - - - - TDM-BKUP 1116 - - - - - - ;</pre>
<input type="checkbox"/>	<p>If the inactive partition of the active MASP has not been formatted continue, otherwise go to Step 30.</p>	
<input type="checkbox"/>	<p>Issue the command to boot the Active MASP recorded in Step 6.</p>	<pre>init-card:loc=XXXX (Where the XXXX is the location of the active MASP record in a previous)</pre>

Procedure 29: Download Target Release to Inactive Partition

<p>26</p> <input type="checkbox"/>	<p>Response to init card command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y * 0261.0013 * CARD 111X OAMHC Card is isolated from the system ASSY SN: xxxxxxxx ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y 5001.0009 CARD 111X OAMHC MASP became active ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y 5038.0014 CARD XXXX OAMHC Card is present ASSY SN: xxxxxxxx ;</pre>
<p>27</p> <input type="checkbox"/>	<p>Issue the command to log back in to the system.</p>	<p>login:uid=XXXXXX (Where XXXXXX is a valid login ID)</p>
<p>28</p> <input type="checkbox"/>	<p>Response to login command is displayed.</p> <p>Ignore any login failure message.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y User logged in on terminal 10. ; ? Login failures since last successful LOGIN Last successful LOGIN was on port ? on ??-?-?? @ ??:?:??</pre>
<p>29</p> <input type="checkbox"/>	<p>Repeat step 12 – 24.</p>	
<p>30</p> <input type="checkbox"/>	<p>If downloading the upgrade target release from an FTP server, continue,</p> <p>Otherwise, insert upgrade media into drive slot and go to step 33.</p>	<p>Once inserted, allow time for the upgrade media to be detected by the system.</p> <p>For E5-MASP systems, the USB drive is inserted in the flush mounted USB port on the active E5-MASP.</p>
<p>31</p> <input type="checkbox"/>	<p>Issue command to retrieve the FTP servers provisioned on the system.</p>	<p>rtrv-ftp-serv</p>
<p>32</p> <input type="checkbox"/>	<p>Response to the command is displayed.</p> <p>Verify that a software distribution, DIST, application server has been provisioned.</p> <p>If the DIST has not been provisioned, contact My Oracle Support for assistance.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y APP IPADDR LOGIN PRIO PATH ----- DIST XXX.XX.X.XX aaaaaa Z aaaaaaaaaaaaaaaaaaa No entries found ;</pre>
<p>33</p> <input type="checkbox"/>	<p>Issue command to retrieve the EAGLE target release software.</p>	<p>act-upgrade:action=getrel:release="xx.xx.xx-yy.yy.yy.tar.gz" :src=server (downloading from the FTP server)</p> <p>or</p> <p>act-upgrade:action=getrel:release="xx.xx.xx-yy.yy.yy.tar.gz" :src=usb (downloading from upgrade media)</p> <p>(Where the xx.xx.xx-yy.yy.yy is the release-build number of the upgrade target load (ex. 45.0.1-64.70.36.tar.gz).</p>

Procedure 29: Download Target Release to Inactive Partition

<p><input type="checkbox"/> 34</p> <p><input type="checkbox"/></p> <p><input type="checkbox"/></p>	<p>Response to the command is displayed.</p> <p>Command execution time: approximately 20 – 30 minutes.</p> <p>If the software release has been downloaded from the USB drive, disconnect the drive from the E5-MASP.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Download release from zzzzzzz ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Validate database release xx.xx.xx-yy.yy.yy.tar ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Copy database release to inactive partition ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Eagle Release successfully downloaded ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Command Complete : Upgrade action completed successfully ;</pre>
<p><input type="checkbox"/> 35</p>	<p>Issue the command to display database status of both TDM partitions.</p>	<p>act-upgrade:action=dbstatus</p>
<p><input type="checkbox"/> 36</p> <p><input type="checkbox"/></p>	<p>Response to the command is displayed.</p> <p>Verify the inactive partitions of the active & standby have been downloaded with the target release by confirming that database VERSION is the target version. C (coherency), LEVEL, and STATUS will be displayed as shown.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y DATABASE STATUS: >> OK << TDM 1114 (ACTV) C LEVEL TIME LAST BACKUP C LEVEL TIME LAST BACKUP ----- FD BKUP Y XXX YY-MM-DD hh:mm:ss TTTT Y XXX YY-MM-DD hh:mm:ss TTTT FD CRNT Y XXX YY-MM-DD hh:mm:ss TTTT Y XXX YY-MM-DD hh:mm:ss TTTT MCAP 1113 MCAP 1115 ----- RD BKUP - - - - - USB BKP - - - - - CARD/APPL LOC C T LEVEL TIME LAST UPDATE VERSION STATUS ----- OAM-RMV 1113 - - - - - TDM-CRNT 1114 Y N XXX YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL TDM-BKUP 1114 Y - XXX YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL OAM-RMV 1115 - - - - - OAM-USB 1115 - - - - - TDM-CRNT 1116 Y N XXX YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL TDM-BKUP 1116 Y - XXX YY-MM-DD hh:mm:ss XXX-XXX-XXX NORMAL INACTIVE PARTITION GROUP CARD/APPL LOC C T LEVEL TIME LAST UPDATE VERSION STATUS ----- TDM-CRNT 1114 Y - 1 00-00-00 00:00:00 ZZZ-ZZZ-ZZZ NORMAL TDM-BKUP 1114 Y - 1 00-00-00 00:00:00 ZZZ-ZZZ-ZZZ NORMAL TDM-CRNT 1116 Y - 1 00-00-00 00:00:00 ZZZ-ZZZ-ZZZ NORMAL TDM-BKUP 1116 Y - 1 00-00-00 00:00:00 ZZZ-ZZZ-ZZZ NORMAL ;</pre>
<p><input type="checkbox"/> 37</p>	<p>If step 10 was executed, issue the command to turn the measurements collection on. Otherwise go to the end of the procedure.</p>	<p>chg-meas:collect=on</p>
<p><input type="checkbox"/> 38</p>	<p>Response to the change command is displayed.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y CHG-MEAS: MASP A - COMPLTD ;</pre>

B.2 Configuring Card-Set Network Conversion Method.

Procedure30: Preparation for Upgrade to use the Card-Set Network Conversion Method.

S T E P	This procedure provides the steps to configure the system to use the card-set method during the network conversion portion (Phase 3) of the upgrade.	
	Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.	
#	SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR UPGRADE ASSISTANCE .	
1 <input type="checkbox"/>	The system should be running the target release on MASPs of 46.0 or higher.	This procedure should be run After Procedure 19, Step 40 in E54339 OR Before Procedure 8 in this document.
2 <input type="checkbox"/>	Issue the card status command to verify the target release GPL is running.	rept-stat-gpl: gpl=oamhc
3 <input type="checkbox"/> <input type="checkbox"/>	Response from the status command is displayed. Verify that the version of OAMHC GPL running is 46.0 or later.	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase 0 GPL Auditing ON APPL CARD RUNNING APPROVED TRIAL OAMHC 1113 XXX-XXX-XXX ALM YYY-YYY-YYY ----- 22 OAMHC 1115 XXX-XXX-XXX ALM YYY-YYY-YYY ----- Command Completed. ;</pre>
4 <input type="checkbox"/>	Issue the command to retrieve the upgrade configuration	rtrv-upgrade-config
5 <input type="checkbox"/> <input type="checkbox"/>	Response to the retrieve command is displayed. If the Threshold Type has not already been changed to SET, it will be either GROUP or SYSTEM. If the SAK is not set, perform Appendix C.	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase x Software Access Key entered on system : vbsevhcea7vy5 Configured Upgrade Threshold Type: GROUP Command Completed. ;</pre>
6 <input type="checkbox"/>	Issue the command to change the upgrade configuration	chg-upgrade-config:threstype=set:srvsets=X:limsets=Y Note: refer to 1.6, recommendation # 5 for the values of X and Y.
7 <input type="checkbox"/>	Response to the command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase x chg-upgrade-config:threstype=set:srvsets=x:limsets=y Command entered at terminal #tt. Command Completed. ;</pre>
8 <input type="checkbox"/>	Issue the command to retrieve the upgrade configuration	rtrv-upgrade-config
9 <input type="checkbox"/>	Response to the retrieve command is displayed.	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase x Software Access Key entered on system : vbsevhcea7vy5 Configured Upgrade Threshold Type: SET Number of SERVICE Sets: X Number of LINK Sets: Y Command Completed. ;</pre>

²² Dashes are displayed until GPL auditing has initialized after the activity has been switched, which may take up to two minutes.

Procedure30: Preparation for Upgrade to use the Card-Set Network Conversion Method.

<p>10 □</p>	<p>Issue the command to report the card status.</p>	<p>rept-stat-card</p>
<p>11 □</p>	<p>Response to the command is displayed.</p>	<pre> eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase x CARD VERSION TYPE GPL PST SST AST 1101 134-076-000 DCM IPGHC IS-NR Active ----- 1102 134-076-000 DCM IPGHC IS-NR Active ----- 1103 134-076-000 DCM IPLHC IS-NR Active ----- 1104 134-076-000 DCM IPLHC IS-NR Active ----- 1105 134-076-000 DSM SCCPHC IS-NR Active ----- 1107 134-076-000 MCPM MCPHC IS-NR Active ----- 1109 134-069-000 HIPR2 HIPR2 IS-NR Active ----- 1110 134-069-000 HIPR2 HIPR2 IS-NR Active ----- 1111 134-076-000 IPSM IPSHC IS-NR Active ----- 1112 134-076-000 TSM GLSHC IS-NR Active ----- 1113 134-076-000 E5MCAP OAMHC IS-NR Standby ----- 1114 ----- E5TDM IS-NR Active ----- 1115 134-076-000 E5MCAP OAMHC IS-NR Active ----- 1116 ----- E5TDM IS-NR Active ----- 1117 ----- E5MDAL IS-NR Active ----- 1201 134-076-000 LIMT1 SS7HC IS-NR Active ----- 1205 134-076-000 DSM SCCPHC IS-NR Active ----- 1207 134-076-000 TSM GLSHC IS-NR Active ----- 1209 134-069-000 HIPR2 HIPR2 IS-NR Active ----- 1210 134-069-000 HIPR2 HIPR2 IS-NR Active ----- 1211 134-076-000 LIMDS0 SS7ML IS-NR Active ----- 1212 134-076-000 LIMDS0 SS7ML IS-NR Active ----- 1213 134-076-000 LIMDS0 SS7ML IS-NR Active ----- 1214 134-076-000 LIMDS0 SS7ML IS-NR Active ----- 1215 134-076-000 LIMDS0 SS7ML IS-NR Active ----- 1216 134-076-000 DCM IPLHC IS-NR Active ----- 1217 134-076-000 DSM SCCPHC IS-NR Active ----- 1301 134-076-000 LIMDS0 SS7ML IS-NR Active ----- 1302 134-076-000 LIMDS0 SS7ML IS-NR Active ----- 1303 134-076-000 LIMDS0 SS7ML IS-NR Active ----- 1304 134-076-000 LIMDS0 SS7ML IS-NR Active ----- 1305 134-076-000 LIMDS0 SS7ML IS-NR Active ----- 1306 134-076-000 LIMDS0 SS7ML IS-NR Active ----- 1307 134-076-000 LIMDS0 SS7ML IS-NR Active ----- 1308 134-076-000 LIMDS0 SS7ML IS-NR Active ----- 1309 134-069-000 HIPR2 HIPR2 IS-NR Active ----- 1310 134-069-000 HIPR2 HIPR2 IS-NR Active ----- 1311 134-076-000 MCPM MCPHC IS-NR Active ----- 1315 134-076-000 IPSM IPSHC IS-NR Active ----- 1316 134-076-000 IPSM IPSHC IS-NR Active ----- 1317 134-076-000 DSM SCCPHC IS-NR Active ----- ; Command Completed. </pre>
<p>12 □</p>	<p>Issue the upgrade activation command to create card sets.</p>	<p>act-upgrade:action=createsets</p>

Procedure30: Preparation for Upgrade to use the Card-Set Network Conversion Method.

<p>13</p> <p><input type="checkbox"/></p>	<p>Response to the command is displayed.</p> <p>Notice: the Create Set command assigns cards to sets using an optimal distribution, which assumes that the system is stable. If the system's configuration is such that the distribution of the cards is not desirable, contact My Oracle Support for assistance when uncertain on how to alter the sets of cards. Otherwise, continue to next step if a change to the assignment of cards is necessary.</p>	<pre> eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase x ACT-UPGRADE: Creating card set list... Card set list created. ; eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase x Card List: Group = MUX, Set = 1 ===== CARD APPL LINKS TPS ----- 1209 MUX N/A N/A 1309 MUX N/A N/A 1109 MUX N/A N/A ----- MUX= 50% ; eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase x Card List: Group = MUX, Set = 2 ===== CARD APPL LINKS TPS ----- 1210 MUX N/A N/A 1310 MUX N/A N/A 1110 MUX N/A N/A ----- MUX= 50% ; eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase x Card List: Group = SERVICE, Set = 1 ===== CARD APPL LINKS TPS ----- 1205 SCCP N/A 1700* 1207 GLS N/A 0 1315 IPS N/A 0 1311 MCP N/A 0 1105 SCCP N/A 1700* 1111 IPS N/A 0 ----- GLS= 50% IPS= 66% MCP= 50% SCCP= 50% ; eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase x Card List: Group = SERVICE, Set = 2 ===== CARD APPL LINKS TPS ----- 1217 SCCP N/A 1700* 1316 IPS N/A 0 1317 SCCP N/A 1700* 1107 MCP N/A 0 1112 GLS N/A 0 ----- GLS= 50% IPS= 33% MCP= 50% SCCP= 50% </pre>
--------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Procedure30: Preparation for Upgrade to use the Card-Set Network Conversion Method.

		<pre> eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase x Card List: Group = LINK, Set = 1 ===== CARD APPL LINKS TPS ----- 1201 SS7 8 N/A 1213 SS7 2 N/A 1215 SS7 1 N/A 1216 IPLIM 8* N/A 1302 SS7 1 N/A 1304 SS7 1 N/A 1306 SS7 1 N/A 1308 SS7 1 N/A 1101 IPGWY 1* N/A ----- ATM= 0% IPGWY= 50% IPLIM=100% SS7= 52% ; eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase x Card List: Group = LINK, Set = 2 ===== CARD APPL LINKS TPS ----- 1211 SS7 4 N/A 1212 SS7 5 N/A 1214 SS7 1 N/A 1301 SS7 1 N/A 1303 SS7 1 N/A 1305 SS7 1 N/A 1307 SS7 1 N/A 1102 IPGWY 1* N/A 1103 IPLIM 0 N/A 1104 IPLIM 0 N/A ----- ATM= 0% IPGWY= 50% IPLIM= 0% SS7= 48% ; eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase x xxxx is unassigned. End of Card List display. ; eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase x Command Complete : Upgrade action completed successfully ; </pre>
<p>14 <input type="checkbox"/></p>	<p>If cards need to be moved to a different set, issue the command to change the upgrade configuration²³</p>	<p>chg-upgrade-config:loc=XXXX:assignset=NN (Where XXXX is the card to be moved and NN is the set it should move to.)</p>
<p>15 <input type="checkbox"/></p>	<p>Response to the command is displayed.</p>	<pre> eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase x chg-upgrade-config:loc=XXXX:assignset=NN Command entered at terminal #tt. Command Completed. ; </pre>
<p>16 <input type="checkbox"/></p>	<p>Issue the one of the following commands to retrieve the card-set configuration</p>	<pre> act-upgrade:action=displaysets rtrv-upgrade-config:display=sets rtrv-upgrade-config:display=limsets rtrv-upgrade-config:display=svrsets </pre>

²³ If card is unassigned, it can also be add to a set with this command. Unassigned cards are usually cards that were not IS-NR when the card sets were created.

Procedure30: Preparation for Upgrade to use the Card-Set Network Conversion Method.

<p>17</p> <p><input type="checkbox"/></p>	<p>Response to the retrieve command is displayed.</p>	<pre> eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase x Card List: Group = MUX, Set = 1 ===== CARD APPL LINKS TPS ----- 1209 MUX N/A N/A 1309 MUX N/A N/A 1109 MUX N/A N/A ----- MUX= 50% ; eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase x Card List: Group = MUX, Set = 2 ===== CARD APPL LINKS TPS ----- 1210 MUX N/A N/A 1310 MUX N/A N/A 1110 MUX N/A N/A ----- MUX= 50% ; eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase x Card List: Group = SERVICE, Set = 1 ===== CARD APPL LINKS TPS ----- 1205 SCCP N/A 1700* 1207 GLS N/A 0 1315 IPS N/A 0 1311 MCP N/A 0 1105 SCCP N/A 1700* 1111 IPS N/A 0 ----- GLS= 50% IPS= 66% MCP= 50% SCCP= 50% ; eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase x Card List: Group = SERVICE, Set = 2 ===== CARD APPL LINKS TPS ----- 1217 SCCP N/A 1700* 1316 IPS N/A 0 1317 SCCP N/A 1700* 1107 MCP N/A 0 1112 GLS N/A 0 ----- GLS= 50% IPS= 33% MCP= 50% SCCP= 50% ; </pre>
-------------------------------------------	-------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Procedure30: Preparation for Upgrade to use the Card-Set Network Conversion Method.

		<pre> eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase x Card List: Group = LINK, Set = 1 ===== CARD APPL LINKS TPS ----- 1201 SS7 8 N/A 1213 SS7 2 N/A 1215 SS7 1 N/A 1216 IPLIM 8* N/A 1302 SS7 1 N/A 1304 SS7 1 N/A 1306 SS7 1 N/A 1308 SS7 1 N/A 1101 IPGWY 1* N/A ----- ATM= 0% IPGWY= 50% IPLIM=100% SS7= 52% ; eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase x Card List: Group = LINK, Set = 2 ===== CARD APPL LINKS TPS ----- 1211 SS7 4 N/A 1212 SS7 5 N/A 1214 SS7 1 N/A 1301 SS7 1 N/A 1303 SS7 1 N/A 1305 SS7 1 N/A 1307 SS7 1 N/A 1102 IPGWY 1* N/A 1103 IPLIM 0 N/A 1104 IPLIM 0 N/A ----- ATM= 0% IPGWY= 50% IPLIM= 0% SS7= 48% ; eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase x xxxx is unassigned. End of Card List display. ; eaglestp YY-MM-DD hh:mm:ss TTTT EAGLE5 XX.x.x-YY.yy.y Upg Phase x Command Complete : Upgrade action completed successfully ; </pre>
<p>18 <input type="checkbox"/></p>	<p>Repeat steps 14 – 17 as cards need to be moved.</p>	

Appendix C. Entering upgrade software access key

Procedure 31: Validate Upgrade Software Access Key

<p>S</p> <p>T</p> <p>E</p> <p>P</p> <p>#</p>	<p>This procedure will validate the Upgrade Software Access Key against the upgrade target release.</p> <p>The Upgrade Software Access Key is used for releases 45.x and 46.0. It is no longer used for release 46.1 and later.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>SHOULD THIS PROCEDURE FAIL, CONTACT My Oracle Support AND ASK FOR UPGRADE ASSISTANCE.</p>	
<p>1</p> <p><input type="checkbox"/></p>	<p>If a USB drive is present, remove it.</p>	<p>If server software delivery (SSD): no RMD should be inserted in drive slot.</p>
<p>2</p> <p><input type="checkbox"/></p>	<p>For release 45.x through 46.0, issue the command to validate the Upgrade Software Access Key.²⁴ Skip this command for releases 46.1 and later.</p>	<p>chg-upgrade-config:sak=XXXXXXXXXXXXX:src=fixed</p> <p>(Where XXXXXXXXXXXXXXXX is the Software Access Key.)</p>
<p>3</p> <p><input type="checkbox"/></p> <p><input type="checkbox"/></p>	<p>Response to command is displayed.</p> <p>Verify the correct Upgrade target release is in the output.</p>	<pre>eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y chg-upgrade-config:key=XXXXXXXXXXXXX:src=zzzzz Command entered at terminal #6. ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Upgrade target: EAGLE XX.x.x-YY.y.y ; eaglestp YY-MM-DD hh:mm:ss TTTT PPP XX.x.x-YY.y.y Command Completed. ;</pre>

²⁴ If SAK unavailable, contact [My Oracle Support](#).

Appendix D. Supplemental information for Procedure 8, Step 2

D.1 Samples of message from convertstp action for act-upgrade command

The following are illustrative of the messages displayed on the user terminal during the semantic check of the upgrade command in Procedure 8, step 2. Headers have been removed for brevity.

```
IMT Bus Check Started
;
IMT Bus Check Completed Successfully.
;
Hardware Validation Test Started
;
Hardware Validation Test Completed Successfully.
;
IP Route Conflict Validation Report
No conflicts with Eagle PVN and FCN found
End IP Route Conflict Validation Report.
;
Using inactive standby partitions for OAM conversion (disk=xxxxx)
```

The following are illustrative of the messages to be seen on the console during Procedure 8, step 2 of the upgrade procedure if the **fixed disk** is used for OAM conversion workspace. Headers and messages not directly output by upgrade have been omitted.

```
Using inactive standby partitions for OAM conversion (dest=fixed)
;
ACT-UPGRADE: MASP A - BLIXP GPL processing.
;
ACT-UPGRADE: MASP A - GPL uploaded.
;
Starting to format the Standby TDM...
;
Format-disk of standby fixed disk complete.
;
Starting to copy GPLs to Standby TDM from removable...
;
GPLs copy completed.
;
Tables conversion started...
;
NOTICE: Converting XXXX.TBL
;
Starting to copy system tables to Standby TDM from Active TDM...
;
Converting Standby OAM System partition.
Preserving the source-release DB version.
Conversion of Standby TDM has completed
;
Marking Standby TDM Upgrade Phase = 2...
;
Swapping Active and Inactive partition on Standby...
;
Standby MASP has not finished initializing - please wait...
;
SYSTEM TREE REBALANCING STARTED
;
Table xxxxxxx.tb1: REBALANCING COMPLETED
;
Table yyyyyyy.tb1: REBALANCING COMPLETED
;
12576 OF 12576 TREES REBALANCED
13 OF 13 TABLES REBALANCED
SYSTEM TREE REBALANCING COMPLETED
;
Standby MASP has not finished initializing - please wait...
;
Starting to backup Standby TDM...
```

```
;
; ACT-UPGRADE: MASP B - Active MASP will reboot and be converted for upgrade.
;
; Starting to format the Standby TDM...
;
; Format disk in progress
;
; Format-disk of standby fixed disk complete.
;
; Starting to copy GPLs to Standby TDM from removable...
;
; NOTICE: Converting XXXX.TBL
;
; Starting to copy system tables to Standby TDM from Active TDM...
;
; Converting Standby OAM System partition.
;
; Preserving the source-release DB version.
;
; Conversion of Standby TDM has completed
;
; Marking Standby TDM Upgrade Phase = 2...
;
; Swapping Active and Inactive partition on Standby...
;
; Standby MASP has not finished initializing - please wait...
;
; Starting to backup Standby TDM...
;
; ACT-UPGRADE: OAM upgrade complete
;
; ACT-UPGRADE: prepare to initialize network cards
;
; Starting network conversion...
;
; Upgrading n of m <APPL> cards [XXXX]
;
; Command in Progress : Network conversion in progress
;
; ACT-UPGRADE: Network conversion complete
;
; ACT-UPGRADE: Network upgrade complete
;
; Command Complete : Upgrade action completed successfully
;
; INFO: Provisioning subsystem is in duplex mode.
;
```

D.2 Determination and Recovery of DDL Hunt during Upgrade

NOTE: The following section should be completed with the assistance of [My Oracle Support](#).

After loading its GPL and database tables, the last step required by an MTP card is to crossload its dynamic database (DDB) from adjacent cards. The DDB contains the status of all routes, linksets, and links provisioned in the system. The Dynamic Data Load (DDL) is the process where a loading MTP card obtains the current view of the network via downloading it from an already IS-NR network card. In order for a network card to download a proper view of the network status, the network must remain quiescent during the download. If an update to the DDB occurs, then the download aborts and restarts. Depending on the size of the network, it may take as long as 4 seconds to complete this process. Please note that the network must remain stable (no changes) during this phase for the download to complete successfully.

The card reports its PST as IS-ANR and its SST as DDL Hunt:

```
Card Failure: Card 1101 did not return to IS-NR.
Status of card 1101:  PST:  IS-ANR           SST:  DDL Hunt   AST:  -----
```

Please note this appendix addresses DDL during Upgrade. Refer to external reference [8] in section 1.2.1 for recovery in full function mode.

A system is considered unstable when provisioned and configured devices are cycling from an alarmed state to a clear state. Bouncing links, link congestion and discard, and DPC|Route transition have the most impact on the DDL Hunt state. Table 21 lists these conditions by UAM number and describes the recovery steps.

The guideline to determine if DDL Hunt is possible when a card boots and tries to reload is based on the number of DDB events, which causes network management messages to be generated. An event is one cycle of alarming and clearing:

```
1237.0236 ** SLK 1201,A1  tk|clset   REPT-LKF: not aligned
1240.0200    SLK 1201,A1                RCVRY-LKF: link available
```

One event consists of two transactions, which generates two network management messages. Eight events in one minute causes sixteen messages which averages to a stability period of less than four seconds. This can range from eight events per one device to one event per eight devices.

Table 21. Recovery from DDL Hunt by UAM.

UAM	Device	Condition	Recovery
0236 0200	SLK	Bouncing Link	A) Issue DDB checksum SEND-MSG per internal Ref. [8] B) Issue CANC-SLK to deactivate the affected link
0264 – 0269	SLK	Link Congestion	A) Issue DDB checksum SEND-MSG per internal Ref. [8] B) Investigate the far-end and fix the far-end C) Issue CANC-SLK to deactivate the affected link
0270 – 0275	SLK	Link Discard	A) Issue DDB checksum SEND-MSG per internal Ref. [8] B) Investigate the far-end and fix the far-end C) Issue CANC-SLK to deactivate the affected link
0311 – 0313	Route	DPC Transition	A) Issue DDB checksum SEND-MSG per internal Ref. [8] B) Investigate the far-end and fix the far-end C) Issue CANC-SLK to deactivate the affected link
0314 – 0316	Route	Route Transition	A) Issue DDB checksum SEND-MSG per internal Ref. [8] B) Investigate the far-end and fix the far-end C) Issue CANC-SLK to deactivate the affected link

Note: If the front-end switches activity, device may return to previous state.

SWOPS Sign Off.

Discrepancy List

Date	Test Case	Description of Failures and/or Issues. Any CSRs / RMAs issued during Acceptance. Discrepancy	Resolution and Upgrade Center Engineer Responsible	Resolution Date:

Appendix E. Customer Sign OFF

Sign-Off Record

*** **Please review this entire document.** ***

This is to certify that all steps required for the upgrade successfully completed without failure.

Sign your name, showing approval of this procedure, and fax this page and the above completed matrix to Oracle CGBU, My Oracle Support web portal (<https://support.oracle.com>).

Customer: Company Name: _____ **Date:** _____

Site: Location: _____
[Include serial number, which was recorded in Procedure 1, Step15.]

Customer: (Print) _____ **Phone:** _____

Fax: _____

Start Date: _____

Completion Date: _____

This procedure has been approved by the undersigned. Any deviations from this procedure must be approved by both Oracle CGBU and the customer representative. A copy of this page will be given to the customer for their records. The SWOPS supervisor will also maintain a signed copy of this completion for future reference.

Oracle Signature: _____ **Date:** _____

Customer Signature: _____ **Date:** _____

Appendix F. My Oracle Support



CAUTION: Use only the guide downloaded from the Oracle Technology Network (OTN) (<http://www.oracle.com/technetwork/indexes/documentation/oracle-comms-tekelec-2136003.html>).

Before upgrading your system, access the **My Oracle Support** web portal (<https://support.oracle.com>) and review any Knowledge Alerts that may be related to the System Health Check or the Upgrade.

Before beginning this procedure, contact My Oracle Support and inform them of your upgrade plans. **If installing for an Oracle customer on a customer site, obtain the customer's Support Identifier (SI) before requesting assistance.**

Web portal (preferred option): My Oracle Support (MOS) (<https://support.oracle.com/>)

Phone: Contact your local Oracle Global Customer Support Center (<http://www.oracle.com/support/contact.html>)

Make the following selections on the Support telephone menu:

1. Select '2' for New Service Request
2. Select '3' for Hardware, Networking and Solaris Operating System Support
3. Select '1' for Technical Issues and when talking to the agent, please indicate that you are an existing Oracle customer