

Oracle® Communications  
User Data Repository  
Cloud Disaster Recovery Guide  
Release 12.4  
**E83401-01**

March 2018

ORACLE®

Copyright © 2016, 2017, 2018, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.



**CAUTION: Open an Service Request on MOS and confer with Oracle before executing Disaster Recovery Procedure**

**Before recovering any system, please access My Oracle Support (MOS) (<https://support.oracle.com>) and review any MOS Alerts that relate to this procedure.**

My Oracle Support (MOS) (<https://support.oracle.com>) is your initial point of contact for all product support and training needs. A representative at Customer Access Support (CAS) can assist you with MOS registration.

Call the CAS main number at 1-800-223-1711 (toll-free in the US), or call the Oracle Support hotline for your local country from the list at <http://www.oracle.com/us/support/contact/index.html>.

See more information on MOS in the Appendix section.

## TABLE OF CONTENTS

<b>1</b>	<b>INTRODUCTION</b> .....	<b>5</b>
1.1	Purpose and Scope.....	5
1.2	References .....	5
1.3	Acronyms.....	6
1.4	Terminology .....	6
1.5	How to Use this Document.....	7
<b>2</b>	<b>GENERAL DESCRIPTION</b> .....	<b>8</b>
2.1	Complete Site Outage (All Servers) .....	8
2.2	Partial outage with one NOAMP server intact and both SOAMs failed .....	8
2.3	Partial outage with both NOAMP servers failed and one SOAM server intact.....	8
2.4	Partial outage with NOAMP and one SOAM server intact .....	8
2.5	Partial outage with Corrupt Database.....	9
<b>3</b>	<b>PROCEDURE OVERVIEW</b> .....	<b>10</b>
3.1	Required Materials .....	10
3.2	Disaster Recovery Strategy.....	11
3.3	Procedure Preparation .....	12
<b>4</b>	<b>DISASTER RECOVERY PROCEDURE</b> .....	<b>14</b>
4.1	Recovering and Restoring System Configuration .....	15
4.1.1	Recovery Scenario 1 (Complete Site Outage).....	15
4.1.2	Recovery Scenario 2 (Partial Server Outage with one NOAMP server intact and both SOAMs failed).....	39
4.1.3	Recovery Scenario 3 (Partial Server Outage with all NOAMP servers failed and one SOAM server intact) .....	60
4.1.4	Recovery Scenario 4 (Partial Server Outage with one NOAMP server and one SOAM server intact) .....	77
4.1.5	Recovery Scenario 5 (Database Recovery).....	91
<b>5</b>	<b>RESOLVING USER CREDENTIAL ISSUES AFTER DATABASE RESTORE</b> .....	<b>96</b>
5.1	Keeping a Restored User (Resetting User Password) .....	96
5.2	Removing a Restored User .....	98
5.3	Restoring a Modified User.....	99
5.4	Restoring an Archive that does not contain a Current User .....	100
Appendix A.	Oracle Communications User Data Repository Database Backup.....	104
Appendix B.	Inhibit A and B Level Replication on C-Level Servers.....	108

Oracle Communications User Data Repository Cloud Disaster Recovery Guide	
Appendix C. Un-Inhibit A and B Level Replication on C-Level Servers .....	110
Appendix D. My Oracle Support (MOS) .....	112
Appendix E. Locate Product Documentation on the Oracle Help Center Site .....	113

## List of Figures

Figure 1. Determining Recovery Scenario .....	11
---	----

## List of Tables

Table 1. Terminology .....	6
Table 2: Recovery Scenarios .....	12

## 1 INTRODUCTION

### 1.1 Purpose and Scope

This document describes disaster recovery procedures used during disaster scenarios of the cloud based Oracle Communications User Data Repository 12.4 product.

This document is a guide to describe procedures used to execute disaster recovery for Oracle Communications User Data Repository Cloud deployments. This includes recovery of partial or a complete loss of one or more Oracle Communications User Data Repository virtual servers (Primary or DR). The audience for this document includes Oracle customers as well as the following internal groups: Software Development, Quality Assurance, Product Verification, Information Development, and Consulting Services including NPx.. This document provides step-by-step instructions to execute disaster recovery for Oracle Communications User Data Repository 12.4. Executing this procedure also involves referring to and executing procedures in existing support documents found in the reference section.

This document is intended for execution by Customer Service team on the fielded Oracle Communications User Data Repository 12.4 systems.

### 1.2 References

- [1] *Oracle Communications User Data Repository 12.4 Disaster Recovery Guide*, E83400-01, latest revision
- [2] *Oracle Communications User Data Repository 12.4 Cloud Installation and Configuration Guide*, E83397-01, latest revision

### 1.3 Acronyms

Acronym	Meaning
BIOS	Basic Input Output System
CD	Compact Disk
DR	Disaster Recovery
FRU	Field Replaceable Unit
IMI	Internal Management Interface
ISL	Inter-Switch-Link
NE	Network Element
MP Host Server	Server that contains one SOAM and two MPs
NOAMP	Network Operations, Administration, Maintenance & Provisioning
ISO	Constains software images
OVA	Open Virtualization Archive
MOS	My Oracle Support
NAPD	Network Architecture Planning Diagram
SOAM	Systems Operations, Administration & Maintenance
TAC	Technical Assistance Centers
TPD	Tekelec Platform Distribution (Linux OS)
UDR	User Data Repository
VIP	Virtual IP
VM	Virtual Machine
XMI	External Management Interface

### 1.4 Terminology

**Table 1. Terminology**

<b>Base hardware</b>	Base hardware includes all hardware components (bare metal) and electrical wiring to allow a server to power on.
<b>Base software</b>	Base software includes installing the server's operating system: Tekelec Platform Distribution (TPD) and TVOE for the MP Host Servers only.
<b>Failed server</b>	A failed server in disaster recovery context refers to a server that has suffered partial or complete software and/or hardware failure to the extent that it cannot restart or be returned to normal operation and requires intrusive activities to re-install the software and/or hardware.

<b>Enablement</b>	The business practice of providing support services (hardware, software, documentation, etc) that enable a 3 <sup>rd</sup> party entity to install, configuration, and maintain Oracle products for Oracle customers.
<b>Software Centric</b>	The business practice of delivering an Oracle software product, while relying upon the customer to procure the requisite hardware components. Oracle provides the hardware specifications, but does not provide the hardware, and is not responsible for hardware installation, configuration, or maintenance.

## 1.5 How to Use this Document

When executing this document, understanding the following helps to ensure that the user understands the manual's intent:

- Before beginning a procedure, completely read the instructional text (it appears immediately after the Section heading for each procedure) and all associated procedural WARNINGS or NOTES.
- Before execution of a STEP within a procedure, completely read the left and right columns including any STEP specific WARNINGS and/or NOTES.

If a procedural STEP fails to execute successfully, please STOP and contact My Oracle Support (MOS).

## 2 GENERAL DESCRIPTION

Disaster recovery procedures falls into five basic categories. It is primarily dependent on the state of the NOAMP servers and SOAM servers:

Recovery of the entire site from a total outage	<ul style="list-style-type: none"> <li>• All NOAMP servers failed</li> <li>• All SOAM servers failed</li> <li>• 1 or more MP servers failed</li> </ul>
Recovery of one or more servers with at least one NOAMP server intact	<ul style="list-style-type: none"> <li>• 1 or more NOAMP servers intact</li> <li>• 1 or more SOAM or MP servers failed</li> </ul>
Recovery of the NOAMP pair with one or more SOAM servers intact	<ul style="list-style-type: none"> <li>• All NOAMP servers failed</li> <li>• 1 or more SOAM servers intact</li> </ul>
Recovery of one or more server with at least one NOAMP and one SOAM server intact.	<ul style="list-style-type: none"> <li>• 1 or more NOAMP servers intact</li> <li>• 1 or more SOAM servers intact</li> <li>• 1 SOAM or 1 or more MP servers failed</li> </ul>
Recovery of one or more servers with corrupt database	<ul style="list-style-type: none"> <li>• Case 1: No Replication Channel</li> <li>• Case 2: Replication Channel Available</li> </ul>

### 2.1 Complete Site Outage (All Servers)

This is the worst case scenario where all the servers in the site have suffered complete software failure. The servers are recovered using OVA images then restoring database backups to the active NOAMP and SOAM servers. Note: NOAMP servers which were originally installed by ISO instead of OVA will be recovered using ISO.

Database backups will be taken from customer offsite backup storage locations (assuming these were performed and stored offsite prior to the outage). If no backup files are available, the only option is to rebuild the entire network from scratch. The network data must be reconstructed from whatever sources are available, including entering all data manually.

### 2.2 Partial outage with one NOAMP server intact and both SOAMs failed

This case assumes that at least one NOAMP servers intact. All SOAM servers have failed and are recovered using OVA images. Database is restored on the SOAM server and replication will recover the database of the remaining servers.

### 2.3 Partial outage with both NOAMP servers failed and one SOAM server intact

Database is restored on the NOAMP and replication will recover the database of the remaining servers.

### 2.4 Partial outage with NOAMP and one SOAM server intact

The simplest case of disaster recovery is with at least one NOAMP and at least one SOAM servers intact. All servers are recovered using base recovery of software. Database replication from the active NOAMP and SOAM servers will recover the database to all servers.



## 2.5 Partial outage with Corrupt Database

**Case 1:** Database is corrupted, *replication channel is inhibited* (either manually or because of comcol upgrade barrier) and database backup is available.

**Case 2:** Database is corrupted but *replication channel is available*.

## 3 PROCEDURE OVERVIEW

This section lists the materials required to perform disaster recovery procedures and a general overview (disaster recovery strategy) of the procedure executed.

### 3.1 Required Materials

The following items are needed for disaster recovery:

1. A hardcopy of this document (E71445-01) and hardcopies of all documents in the reference list
2. Hardcopy of all NAPD performed at the initial installation and network configuration of this customer's site. If the NAPD cannot be found, escalate this issue within My Oracle Support (MOS) until the NAPD documents can be located.
3. Oracle Communications User Data Repository recent backup files: electronic backup file (preferred) or hardcopy of all Oracle Communications User Data Repository configuration and provisioning data.
4. Latest Network Element report: Electronic file or hardcopy of Network Element report.
5. The network element XML file used for the VMs initial configuration.

The software media referenced here may be acquired online from the Oracle e-Delivery service at [edelivery.oracle.com](http://edelivery.oracle.com)

This document and others referenced here can be acquired online from the Oracle Document Repository at the following URL:

<http://docs.oracle.com/en/industries/communications/user-data-repository/index.html>

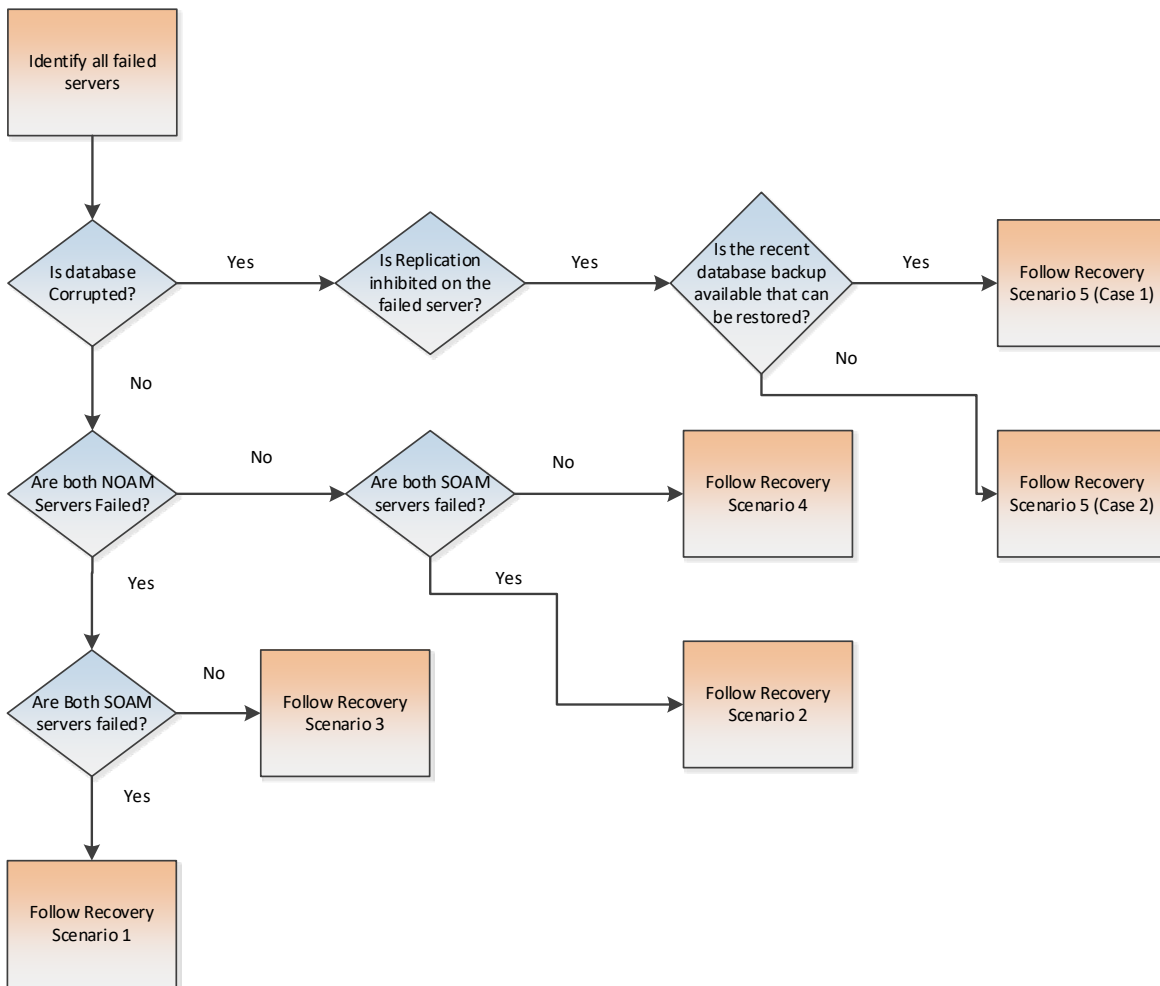
**Note:** For all Disaster Recovery scenarios, we assume that the NOAMP Database backup and the SOAM database backup were performed around the same time, and that no synchronization issues exist among them.

### 3.2 Disaster Recovery Strategy

Disaster recovery procedure execution is performed as part of a disaster recovery strategy with the basic steps listed below:

1. Evaluate failure conditions in the network and determine that normal operations cannot continue without disaster recovery procedures. This means the failure conditions in the network match one of the failure scenarios described in section 2.
2. Read and review the content in this document.
3. Gather required materials in section 3.1 **Required Materials**
4. From the failure conditions, determine the Recovery Scenario and procedure to follow (using Figure 1. Determining Recovery Scenario).
5. Execute appropriate recovery procedures (listed in section 4).

**Figure 1. Determining Recovery Scenario**



### 3.3 Procedure Preparation

Disaster recovery procedure execution is dependent on the failure conditions in the network. The severity of the failure determines the recovery scenario for the network. Use Table 2: Recovery Scenarios below to evaluate the correct recovery scenario and follow the procedure(s) listed to restore operations.

**Note:** A failed server in disaster recovery context refers to a server that has suffered partial or complete software failure to the extent that it cannot restart or be returned to normal operation and requires intrusive activities to re-deploy base software.

**Table 2: Recovery Scenarios**

Recovery Scenario	Failure Condition	Section
1	<ul style="list-style-type: none"> <li>All NOAMP servers failed.</li> <li>All SOAM servers failed.</li> <li>MP servers may or may not be failed.</li> </ul>	Section Recovery Scenario 1 (Complete Site Outage)
2	<ul style="list-style-type: none"> <li>At least 1 NOAMP server is intact and available.</li> <li>All SOAM servers failed.</li> <li>MP servers may or may not be failed.</li> </ul>	Section Recovery Scenario 2 (Partial Server Outage with one NOAMP server intact and both SOAMs failed)
3	<ul style="list-style-type: none"> <li>All NOAMP servers failed.</li> <li>At least 1 SOAM server is intact and available.</li> <li>MP servers may or may not be failed.</li> </ul>	Section Recovery Scenario 3 (Partial Server Outage with all NOAMP servers failed and one SOAM server intact)
4	<ul style="list-style-type: none"> <li>At least 1 NOAMP server is intact and available.</li> <li>At least 1 SOAM is intact and available.</li> <li>1 or more MP servers have failed.</li> </ul>	Section Recovery Scenario 4 (Partial Server Outage with one NOAMP server and one SOAM server intact)
5	<ul style="list-style-type: none"> <li>Server is intact</li> <li>Database gets corrupted on the server</li> </ul>	Section Recovery Scenario 5 (Database Recovery)
5: Case 1	<ul style="list-style-type: none"> <li>Server is intact</li> <li>Database gets corrupted on the server</li> <li>Replication is inhibited (either manually or because of comcol upgrade barrier)</li> </ul>	Section Recovery Scenario 5: Case 1

5: Case 2	<ul style="list-style-type: none"><li>• Server is intact</li><li>• Database gets corrupted on the server</li><li>• Replication is occurring to the server with corrupted database</li></ul>	Section Recovery Scenario 5: Case 2
-----------	---	---

## 4 DISASTER RECOVERY PROCEDURE

Call the CAS main number at **1-800-223-1711** (toll-free in the United States), or call the Oracle Support hotline for your local country from the list at <http://www.oracle.com/us/support/contact/index.html> prior to executing this procedure to ensure that the proper recovery planning is performed.

Before disaster recovery, users must properly evaluate the outage scenario. This check ensures that the correct procedures are executed for the recovery.

**\*\*\*\* WARNING \*\*\*\*\***

**\*\*\*\* WARNING \*\*\*\*\***

**Note:** *Disaster recovery is an exercise that requires collaboration of multiple groups and is expected to be coordinated by the TAC prime. Based on TAC's assessment of Disaster, it may be necessary to deviate from the documented process.*

## 4.1 Recovering and Restoring System Configuration

Disaster recovery requires configuring the system as it was before the disaster and restoration of operational information. There are 7 distinct procedures to choose from depending on the type of recovery needed. Only one of these should be followed (not all).

### 4.1.1 Recovery Scenario 1 (Complete Site Outage)

For a complete server outage, NOAMP servers are recovered using recovery procedures for software and then executing a database restore to the active NOAMP server. All other servers are recovered using recovery procedures for software.

Database replication from the active NOAMP server will recover the database on these servers. The major activities are summarized in the list below. Use this list to understand the recovery procedure summary. Do not use this list to execute the procedure. The actual detailed steps are in . The major activities are summarized as follows:

Recover Base software for all VMs:

- Recover the Virtual Machines hosting the NOAMPs and SOAMs
- Recover the **Active NOAMP** server by recovering the NOAMPs base software
- Recover the NOAMP database
- Reconfigure the application

Recover the **Standby NOAMP** server by recovering base software, for a Non-HA deployment this can be skipped.

- Reconfigure the Oracle Communications User Data Repository Application

Recover all SOAM and MP servers by recovering software, In a Non-HA deployment the Standby SOAM servers can be skipped.

- Recover the SOAM database
- Reconfigure the Oracle Communications User Data Repository Application
- Reconfigure the signaling interface and routes on the MPs, the Oracle Communications User Data Repository software will automatically reconfigure the signaling interface from the recovered database.

Restart process and re-enable provisioning replication

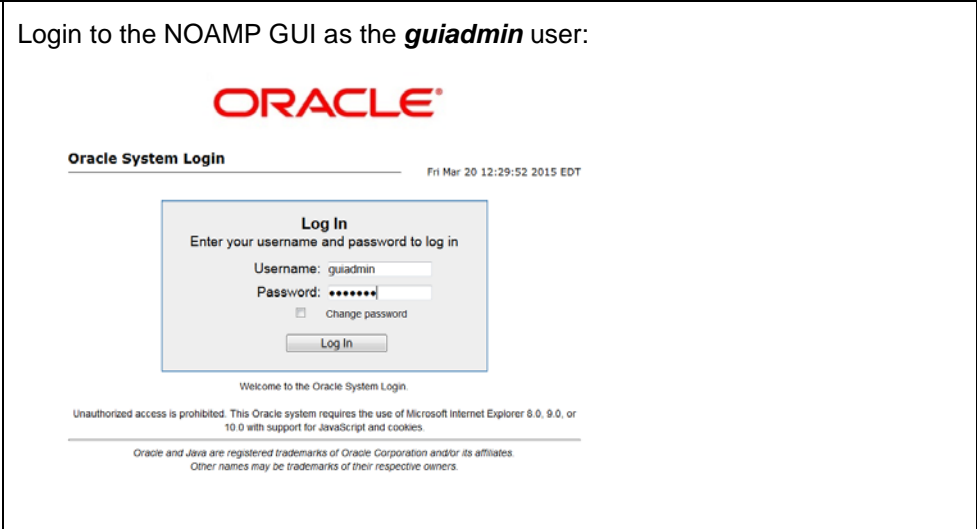
**Note:** Any other applications DR recovery actions (PCRF, etc) may occur in parallel. These actions can/should be worked simultaneously; doing so would allow faster recovery of the complete solution.

**Procedure 1: Recovery Scenario 1 -- Complete Server Outage**

<p><b>S</b> <b>T</b> <b>E</b> <b>P</b> <b>#</b></p>	<p>This procedure performs recovery if both NOAMP servers are failed and all SOAM servers are failed. This procedure also caters the C-Level Sever failure</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>If this procedure fails, contact <b>My Oracle Support (MOS)</b>, and ask for assistance.</p>	
<p>1. <input type="checkbox"/></p>	<p><b>Gather Required Materials</b></p>	<p>Gather the documents and required materials listed in <b>Section Required Materials</b></p>
<p>2. <input type="checkbox"/></p>	<p><b>Recover the Failed Software</b></p>	<p>Execute the following procedures from reference <i>Oracle Communications User Data Repository 12.4 Cloud Installation and Configuration Guide</i>, E83397-01, latest revision [2]:</p> <p style="text-align: center;"><b>Procedure 2 : Deploy Oracle Communications User Data Repository Virtual Machines</b></p>
<p>4. <input type="checkbox"/></p>	<p><b>Obtain Latest Database Backup and Network Configuration Data.</b></p>	<p>Obtain the most recent database backup file from external backup sources (ex. file servers) or tape backup sources.</p> <p>From required materials list in <b>Section 3.1 Required Materials</b>; use site survey documents and Network Element report (if available), to determine network configuration data.</p>
<p>5. <input type="checkbox"/></p>	<p><b>Execute UDR Installation Procedure for the First NOAMP</b></p>	<p>Configure the First NOAMP server by executing procedures from reference <i>Oracle Communications User Data Repository 12.4 Cloud Installation and Configuration Guide</i>, E83397-01, latest revision [2]:</p> <p><b>Procedure 3</b> “Configure NOAMP-A Server (1<sup>st</sup> NOAMP Only)”</p> <p><b>Note:</b> If Topology or nodeId alarms are persistent after the database restore, refer to the steps below.</p>




**Procedure 1: Recovery Scenario 1 -- Complete Server Outage**

6.	<b>Active NOAMP: Login</b>	Login to the NOAMP GUI as the <b>guiadmin</b> user:  
----	--------------------------------	---

**Procedure 1: Recovery Scenario 1 -- Complete Server Outage**

- 7. **Active NOAMP:**  
Upload the Backed up Database File


Browse to **Main Menu** → **Status & Manage** → **Files**



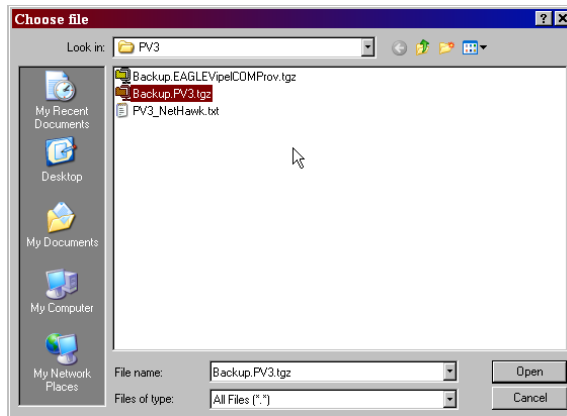
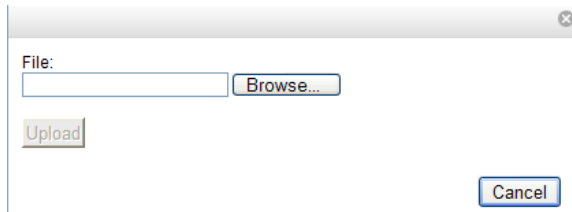
Select the Active NOAMP server. The following screen will appear:

File Name	Size	Type	Timestamp
Backup.dsr.Cpa1-NO.Configuration.NETWORK_OAMP.20120321_021501.AUTO.tar	720 KB	tar	2012-03-21 06:15:02 UTC

Click on **Upload** as shown below and select the file “*NO Provisioning and Configuration:*” file backed up after initial installation and provisioning.

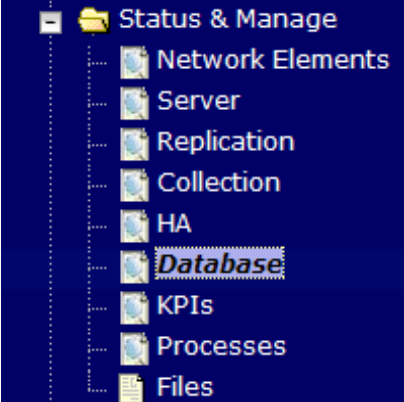




Click on **Browse** and locate the backup file and click on Open as shown below.




Click on the **Upload** button. The file will take a few seconds to upload depending on the size of the backup data. The file will be visible on the list of entries after the upload is complete.

**Procedure 1: Recovery Scenario 1 -- Complete Server Outage**

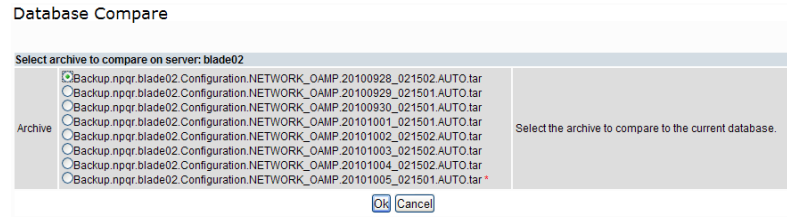
<p>8. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Disable Provisioning</p>	<p>Click on <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Database</b></p>  <p>Disable Provisioning by clicking on <b>Disable Provisioning</b> button at the bottom of the screen as shown below.</p>  <p>A confirmation window will appear, press <b>OK</b> to disable Provisioning.</p>  <p>The message “<i>Warning Code 002</i>” may appear.</p>
------------------------------------	--	--

9. **Active NOAMP:**  
 Verify the Archive Contents and Database Compatibility

Select the **Active NOAMP** server and click on the **Compare**.



The following screen is displayed; click the button for the restored database file that was uploaded as a part of **Step 13** of this procedure.



**Verify** that the output window matches the screen below.

**Note:** You will get a database mismatch regarding the NodeIDs of the VMs. That is expected. If that is the only mismatch, proceed, otherwise stop and contact My Oracle Support (MOS).



**Note:** Archive Contents and Database Compatibilities must be the following:

**Archive Contents:** Configuration data

**Database Compatibility:** The databases are compatible.

**Note:** The following is expected Output for Topology Compatibility Check since we are restoring from existing backed up data base to database with just one NOAMP:

**Topology Compatibility**

THE TOPOLOGY SHOULD BE COMPATIBLE MINUS THE NODEID.

**Note:** We are trying to restore a backed up database onto an empty NOAMP database. This is an expected text in Topology Compatibility.

If the verification is successful, Click **BACK** button and continue to **next step** in this procedure.




**Procedure 1: Recovery Scenario 1 -- Complete Server Outage**

<p>10. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Restore the Database</p>	<p>Click on <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Database</b></p> <p>Select the <b>Active NOAMP</b> server, and click on <b>Restore</b> as shown below.</p> <p>The following screen will be displayed. Select the proper back up provisioning and configuration file.</p> <div style="border: 1px solid #ccc; padding: 5px; margin: 10px 0;"> <p><b>Database Restore</b></p> <p>Select archive to Restore on server: blade02</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 20%; text-align: center;">Archive</td> <td style="width: 60%;"> <input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20100928_021502.AUTO.tar  <input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20100929_021501.AUTO.tar  <input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20100930_021501.AUTO.tar  <input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20101001_021501.AUTO.tar  <input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20101002_021502.AUTO.tar  <input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20101003_021502.AUTO.tar  <input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20101004_021502.AUTO.tar  <input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20101005_021501.AUTO.tar*                 </td> <td style="width: 20%; text-align: center; vertical-align: middle;">Select the archive to restore on blade02.</td> </tr> </table> <p style="text-align: center;"><input type="button" value="OK"/> <input type="button" value="Cancel"/></p> </div> <p>Click <b>OK</b> Button. The following confirmation screen will be displayed.</p> <p><b>Note:</b> You will get a database mismatch regarding the NodeIDs of the servers. That is expected. If that is the only mismatch, proceed, otherwise stop and contact My Oracle Support (MOS).</p> <p>Select the <b>Force</b> checkbox as shown above and Click <b>OK</b> to proceed with the DB restore.</p> <div style="border: 1px solid #ccc; padding: 5px; margin: 10px 0;"> <p><b>Database Restore Confirm</b></p> <p>Incompatible database selected</p> <div style="background-color: #ffe0e0; padding: 5px; border: 1px solid #ccc;"> <p>Discrepancies:</p> <ul style="list-style-type: none"> <li>- IMI Server Address A3118.120 has different node IDs in current topology and the selected backup file.</li> <li>Current node ID: A3118.120, Selected backup file node ID: B2073.087</li> <li>- IMI Server Address C1157.241 has different node IDs in current topology and the selected backup file.</li> <li>Current node ID: C1157.241, Selected backup file node ID: B2073.087</li> <li>- IMI Server Address B1787.161 has different node IDs in current topology and the selected backup file.</li> <li>Current node ID: B1787.161, Selected backup file node ID: B2073.087</li> </ul> </div> <p>Confirm archive "3bladeNPQR.blade07.Configuration.NETWORK_OAMP.20110119_184253.MAN.tar" to Restore on server: blade07</p> <p>Force Restore? <input checked="" type="checkbox"/> Force <input type="button" value="OK"/> <input type="button" value="Cancel"/> Force restore on blade07, despite compare errors.</p> </div> <p><b>Note:</b> After the restore has started, the user will be logged out of XMI NO GUI since the restored Topology is old data.</p>	Archive	<input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20100928_021502.AUTO.tar <input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20100929_021501.AUTO.tar <input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20100930_021501.AUTO.tar <input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20101001_021501.AUTO.tar <input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20101002_021502.AUTO.tar <input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20101003_021502.AUTO.tar <input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20101004_021502.AUTO.tar <input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20101005_021501.AUTO.tar*	Select the archive to restore on blade02.
Archive	<input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20100928_021502.AUTO.tar <input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20100929_021501.AUTO.tar <input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20100930_021501.AUTO.tar <input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20101001_021501.AUTO.tar <input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20101002_021502.AUTO.tar <input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20101003_021502.AUTO.tar <input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20101004_021502.AUTO.tar <input type="radio"/> Backup.npq:blade02.Configuration.NETWORK_OAMP.20101005_021501.AUTO.tar*	Select the archive to restore on blade02.			


**Procedure 1: Recovery Scenario 1 -- Complete Server Outage**

<p>11.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Login</p>	<p>Establish a GUI session on the NOAMP server by using the VIP IP address of the NOAMP server. Open the web browser and enter a URL of:</p> <div style="border: 1px solid black; padding: 5px; margin: 10px 0;"> <p><code>http://&lt;Primary_NOAMP_VIP_IP_Address&gt;</code></p> </div> <p>Login as the <i>guiadmin</i> user:</p>
<p>12.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Monitor and Confirm database restoral</p>	<p>Wait for <b>5-10 minutes</b> for the System to stabilize with the new topology:</p> <p>Monitor the Info tab for <b>“Success”</b>. This will indicate that the backup is complete and the system is stabilized.</p> <p>Following alarms <b>must</b> be ignored for NOAMP and MP Servers until all the Servers are configured:</p> <p>Alarms with Type Column as <b>“REPL”</b>, <b>“COLL”</b>, <b>“HA”</b> (with mate NOAMP), <b>“DB”</b> (about Provisioning Manually Disabled)</p> <p><b>Note:</b> Do not pay attention to alarms until all the servers in the system are completely restored.</p> <p><b>Note:</b> The Configuration and Maintenance information will be in the same state it was backed up during initial backup.</p>
<p>13.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Login</p>	<p>Login to the recovered Active NOAMP via SSH terminal as <i>admusr</i> user.</p>
<p>14.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Restore /etc/hosts/ File of the Active NOAMP</p>	<p>Execute the following command:</p> <div style="border: 1px solid black; padding: 5px; margin: 10px 0;"> <p><code>\$ sudo AppWorks AppWorks_AppWorks updateServerAliases &lt;NOAMP Host Name&gt;</code></p> </div>

**Procedure 1: Recovery Scenario 1 -- Complete Server Outage**


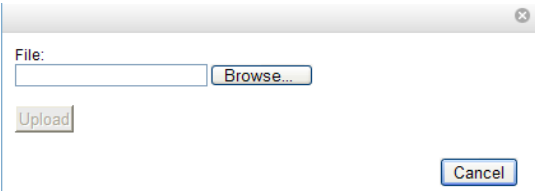
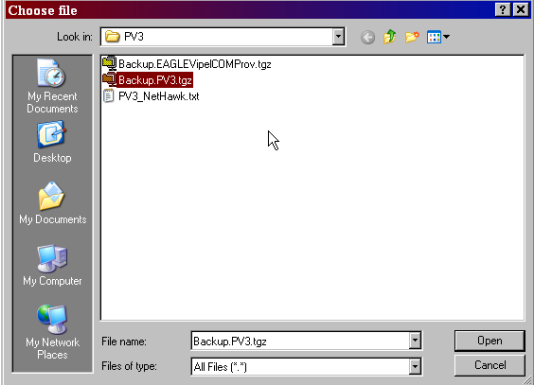
<p>15. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Recover Standby NOAMP  (HA Deployments Only)</p>	<p>Configure the second NOAMP server by executing procedures from reference <i>Oracle Communications User Data Repository 12.4 Cloud Installation and Configuration Guide</i>, E83397-01, latest revision [2]:</p> <p><b>Procedure 4</b> “Create Configuration for Remaining Servers”, Step 22.</p> <p><b>Procedure 10</b> “Apply Configuration for Remaining Servers” for second NOAMP.</p> <p><b>Note:</b> If Topology or nodeId alarms are persistent after the database restore, refer to the steps below.</p>
<p>16. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Restart UDR application on Recovered NOAMP</p>	<p>Navigate to <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Server</b>,</p>  <p>Select the recovered standby NOAMP server and click on <b>Restart</b>.</p> 
<p>17. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Set HA on Standby NOAMP</p>	<p>Navigate to <b>Status &amp; Manage</b> → <b>HA</b></p>  <p>Click on <b>Edit</b> at the bottom of the screen</p> <p>Select the standby NOAMP server, set it to <b>Active</b></p> <p>Press <b>OK</b></p>

**Procedure 1: Recovery Scenario 1 -- Complete Server Outage**


<p>18. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Stop Replication to the C-Level Servers of this Site.</p>	<p>Inhibit Replication to the working C Level (MP) Servers which belong to the <b>same site</b> as of the failed SOAM servers, as the recovery of Active SOAM will cause the database wipeout in the C level servers because of the replication</p> <p style="text-align: center;">Execute <b>Appendix B: Inhibit A and B Level Replication on C-Level Servers</b></p>
<p>19. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Recover SOAM Server</p>	<p>Recover the SOAM server by executing procedures from reference <i>Oracle Communications User Data Repository 12.4 Cloud Installation and Configuration Guide</i>, E83397-01, latest revision [2]:</p> <p><b>Procedure 4</b> “Create Configuration for Remaining Servers”, Step 22.</p> <p><b>Procedure 10</b> “Apply Configuration for Remaining Servers” for SOAM</p>
<p>20. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Restart UDR application on Recovered SOAM Server</p>	<p>Navigate to <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Server</b>,</p>  <p>Select the recovered server and click on <b>Restart</b>.</p> <div style="display: flex; justify-content: center; gap: 10px;"> <span>Stop</span> <span>Restart</span> <span>Reboot</span> <span>NTP Sync</span> <span>Report</span> </div>



**Procedure 1: Recovery Scenario 1 -- Complete Server Outage**


<p>21. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Upload the backed up SOAM Database file</p>	<p>Navigate to <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Files</b></p> <p>Select the <b>Active SOAM server</b>. The following screen will appear. Click on Upload as shown below and select the file “<i>SO Provisioning and Configuration:</i>” file backed up after initial installation and provisioning.</p>  <p>0 used (0%) of 0 available   System utilization: 0 (0%) of 0 available.</p> <p>Click on Browse and Locate the backup file and click on Open as shown below.</p>   <p>Click on the <b>Upload</b> button. The file will take a few seconds to upload depending on the size of the backup data. The file will be visible on the list of entries after the upload is complete.</p>
-------------------------------------	---	---

**Procedure 1: Recovery Scenario 1 -- Complete Server Outage**

<p>22.</p> <p><input type="checkbox"/></p>	<p><b>Recovered SOAM: Login</b></p>	<p>Establish a GUI session on the recovered SOAM server.</p> <p>Open the web browser and enter a URL of:</p> <div data-bbox="467 325 1323 382" style="border: 1px solid black; padding: 5px; margin: 10px 0;"><p><code>http://&lt;Recovered_SOAM_IP_Address&gt;</code></p></div> <p>Login as the <i>guiadmin</i> user:</p> <div data-bbox="467 504 1323 871" style="border: 1px solid black; padding: 10px; margin: 10px 0;"><p>The screenshot shows the Oracle System Login interface. At the top is the Oracle logo. Below it, the text 'Oracle System Login' is followed by a horizontal line and the date 'Fri Mar 20 12:29:52 2015 EDT'. A central box titled 'Log In' contains the instruction 'Enter your username and password to log in'. It features two input fields: 'Username' with the value 'guiadmin' and 'Password' with masked characters '*****'. There is a 'Change password' checkbox and a 'Log In' button. Below the box, it says 'Welcome to the Oracle System Login'. At the bottom, there is a disclaimer: 'Unauthorized access is prohibited. This Oracle system requires the use of Microsoft Internet Explorer 8.0, 9.0, or 10.0 with support for JavaScript and cookies.' and a footer: 'Oracle and Java are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.'</p></div>
--	-------------------------------------	--

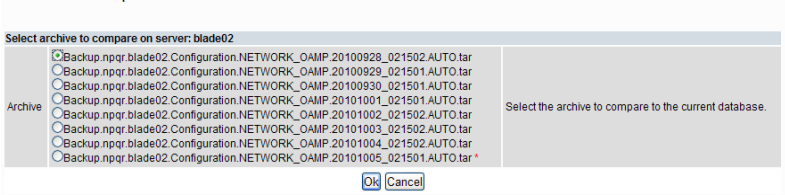
23.  **Recovered SOAM: Verify the Archive Contents and Database Compatibility**

Navigate to **Main Menu** → **Status & Manage** → **Database**  
 Select the **Active SOAM** server and click on the **Compare**.



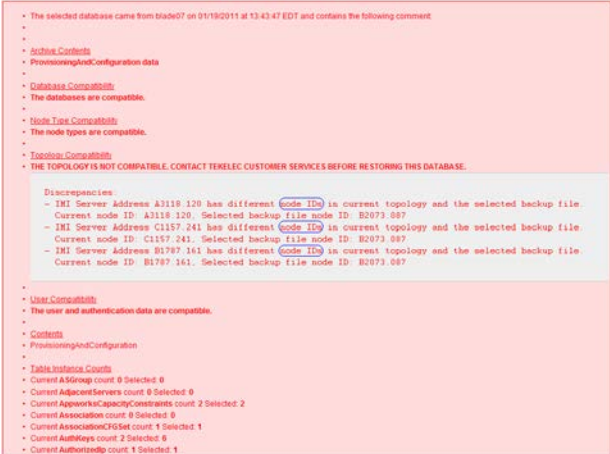
The following screen is displayed; click the button for the restored database file that was uploaded as a part of **Step 13** of this procedure.

Database Compare



**Verify** that the output window matches the screen below.

**Note:** You will get a database mismatch regarding the NodeIDs of the VMs. That is expected. If that is the only mismatch, proceed, otherwise stop and contact My Oracle Support (MOS).



**Note:** Archive Contents and Database Compatibilities must be the following:

**Archive Contents:** Configuration data

**Database Compatibility:** The databases are compatible.

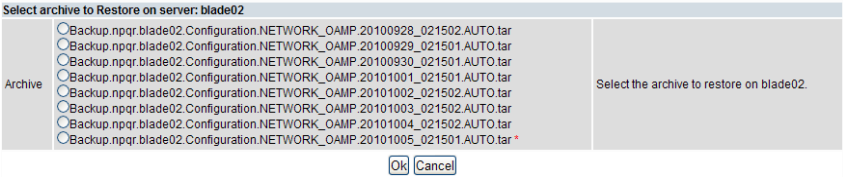
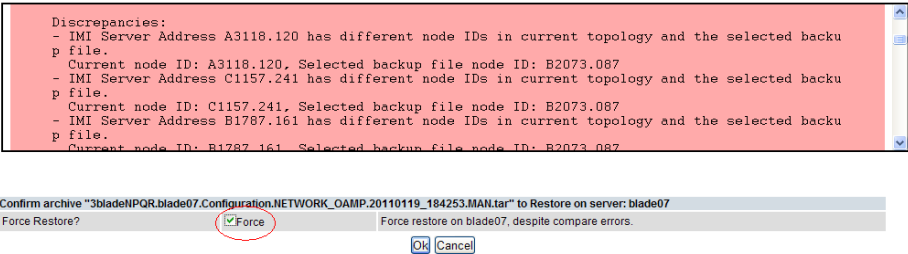
**Note:** The following is expected Output for Topology Compatibility Check since we are restoring from existing backed up data base to database with just one SOAM:

**Topology Compatibility**  
 THE TOPOLOGY SHOULD BE COMPATIBLE MINUS THE NODEID.


**Note:** We are trying to restore a backed up database onto an empty SOAM database. This is an expected text in Topology Compatibility.

If the verification is successful, Click **BACK** button and continue to **next step** in this procedure.




**Procedure 1: Recovery Scenario 1 -- Complete Server Outage**

<p>24.</p> <p><input type="checkbox"/></p>	<p><b>Recovered SOAM: Restore the Database</b></p>	<p>Click on <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Database</b></p> <p>Select the <b>Active SOAM</b> server, and click on <b>Restore</b> as shown below.</p> <p>The following screen will be displayed. Select the proper back up provisioning and configuration file.</p> <p><b>Database Restore</b></p>  <p>Click <b>OK</b> Button. The following confirmation screen will be displayed.</p> <p>If you get an error that the NodeIDs do not match. That is expected. If no other errors beside the NodeIDs are displayed, select the <b>Force</b> checkbox as shown below and Click <b>OK</b> to proceed with the DB restore.</p> <p><b>Database Restore Confirm</b></p> <p>Incompatible database selected</p>  <p><b>Note:</b> After the restore has started, the user will be logged out of XMI SOAM GUI since the restored Topology is old data.</p>
<p>25.</p> <p><input type="checkbox"/></p>	<p><b>Recovered SOAM: Monitor and Confirm database restoral</b></p>	<p>Wait for <b>5-10 minutes</b> for the System to stabilize with the new topology:</p> <p>Monitor the Info tab for <b>“Success”</b>. This will indicate that the backup is complete and the system is stabilized.</p> <p><b>Note:</b> Do not pay attention to alarms until all the servers in the system are completely restored.</p> <p><b>Note:</b> The Configuration and Maintenance information will be in the same state it was backed up during initial backup.</p>




**Procedure 1: Recovery Scenario 1 -- Complete Server Outage**

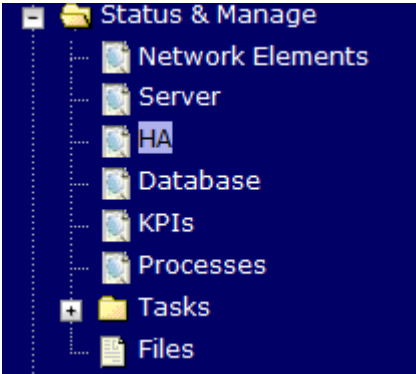
<p>26.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP: Login</b></p>	<p>Establish a GUI session on the NOAMP server by using the VIP IP address of the NOAMP server. Open the web browser and enter a URL of:</p> <div style="border: 1px solid black; padding: 5px; margin: 10px 0;"> <p><b>http://&lt;Primary_NOAMP_VIP_IP_Address&gt;</b></p> </div> <p>Login as the <b>guiadmin</b> user:</p> 
<p>27.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP: Recover remaining SOAM (HA Deployments Only)</b></p>	<p><b>NOTE:</b> For Non-HA sites <b>SKIP</b> this step.</p> <p>Recover second SOAM server by executing procedures from reference <i>Oracle Communications User Data Repository 12.4 Cloud Installation and Configuration Guide</i>, E83397-01, latest revision [2]:</p> <p><b>Procedure 4</b> “Create Configuration for Remaining Servers”, Step 22.</p> <p><b>Procedure 10</b> “Apply Configuration for Remaining Servers” for remaining SOAM.</p> <p><b>NOTE:</b> Wait for server to reboot before continuing.</p>

**Procedure 1: Recovery Scenario 1 -- Complete Server Outage**

<p>28.</p>	<p><b>Active NOAMP:</b> Restart UDR application on remaining SOAM  (HA Deployments Only)</p>	<p><b>NOTE:</b> For Non-HA sites <b>SKIP</b> this step.</p> <p>Navigate to <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Server</b>,</p>  <p>Select the recovered server and click on <b>Restart</b>.</p> 
<p>29.</p>	<p><b>Active NOAMP:</b> Set HA on Recovered SOAM  (HA Deployments Only)</p>	<p><b>NOTE:</b> For Non-HA sites <b>SKIP</b> this step.</p> <p>Navigate to <b>Status &amp; Manage</b> → <b>HA</b></p>  <p>Click on <b>Edit</b> at the bottom of the screen Set Max Allowed HA Role to <b>Active</b> Press <b>OK</b></p>

**Procedure 1: Recovery Scenario 1 -- Complete Server Outage**

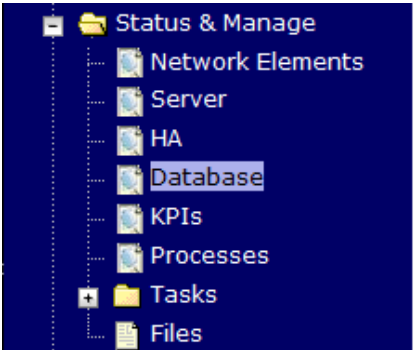
<p>30.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Start Replication on MP Servers</p>	<p>Un-Inhibit (<i>Start</i>) Replication to the <b>MP</b> Servers which belong to the <u>same site as of the failed SOAM</u> servers.</p> <p>Execute <b>Appendix C Un-Inhibit A and B Level Replication on C-Level Servers</b></p> <p>Navigate to <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Database</b></p> <p>If the “<i>Repl Status</i>” is set to “Inhibited”, click on the <b>Allow Replication</b> button as shown below using the following order, otherwise if none of the servers are inhibited, skip this step and continue with the next step:</p> <ul style="list-style-type: none"> <li>• Active NOAMP Server</li> <li>• Standby NOAMP Server</li> <li>• Active SOAM Server</li> <li>• Standby SOAM Server</li> <li>• MP Servers</li> </ul> <p>Verify that the replication on all the working servers is allowed. This can be done by clicking on each server and checking that the button below shows “Inhibit Replication”, and <b>NOT</b> “Allow Replication”.</p> 
<p>31.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Restart UDR application for Recovered MP</p>	<p>Navigate to <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Server</b>,</p>  <p>Select the recovered server and click on <b>Restart</b>.</p> 

<p>32.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Set HA on all MP Servers</p>	<p>Navigate to <b>Status &amp; Manage</b> → <b>HA</b></p>  <p>Click on <b>Edit</b> at the bottom of the screen</p> <p>For each server whose Max Allowed HA Role is set to Standby, set it to <b>Active</b></p> <p>Press <b>OK</b></p>
<p>33.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Perform key exchange between the active-NOAMP and recovered servers.</p>	<p>Establish an SSH session to the Active NOAMP, login as <b>admusr</b>.</p> <p>Execute the following command to perform a keyexchange from the active NOAMP to each recovered server:</p> <pre style="border: 1px solid black; padding: 5px; width: fit-content;">\$ keyexchange admusr@&lt;Recovered Server Hostname&gt;</pre>

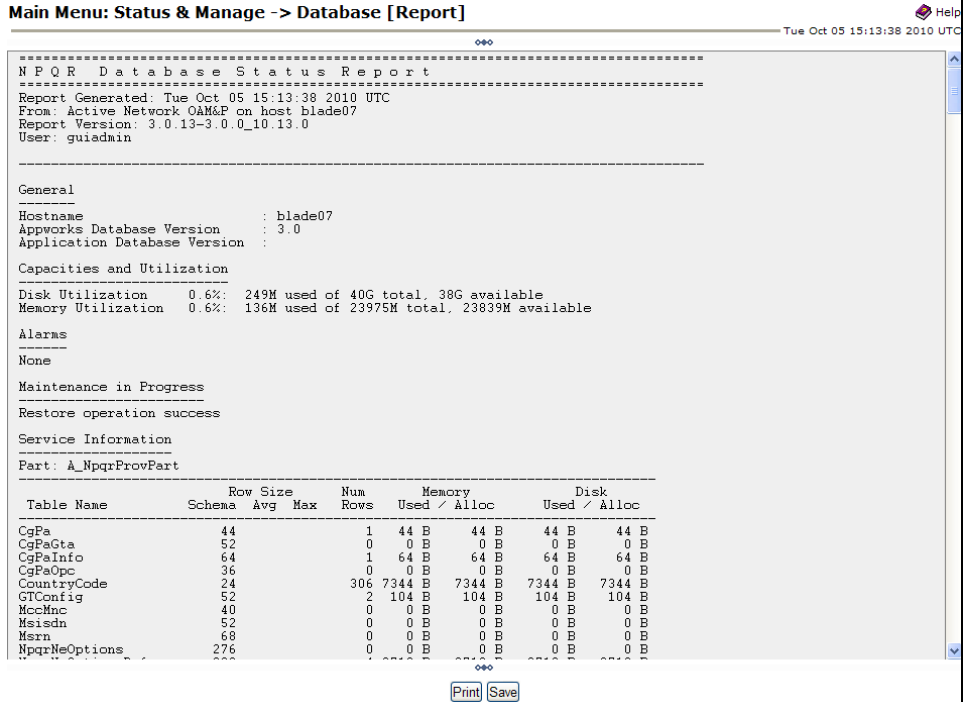


34. **Active NOAMP:**  
 Fetch and Store the database Report for the Newly Restored Data and Save it

Navigate to **Main Menu → Status & Manage → Database**



Select the **active** NOAMP server and click on the **Report** button at the bottom of the page. The following screen is displayed:



**Main Menu: Status & Manage -> Database [Report]** Help Tue Oct 05 15:13:38 2010 UTC

```

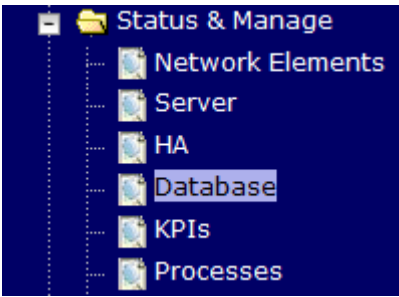
=====
N P Q R Database Status Report
=====
Report Generated: Tue Oct 05 15:13:38 2010 UTC
From: Active Network OAM&P on host blade07
Report Version: 3.0.13-3.0.0_10.13.0
User: guiadmin
=====

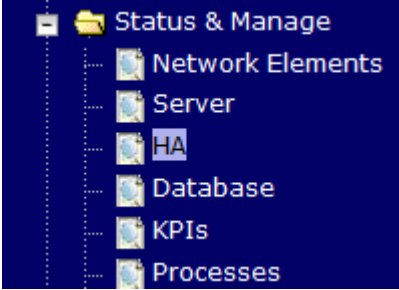



General
-----
Hostname           : blade07
Appworks Database Version : 3.0
Application Database Version :
Capacities and Utilization
-----
Disk Utilization   0.6%: 249M used of 40G total, 38G available
Memory Utilization 0.6%: 136M used of 23975M total, 23839M available
Alarms
-----
None
Maintenance in Progress
-----
Restore operation success

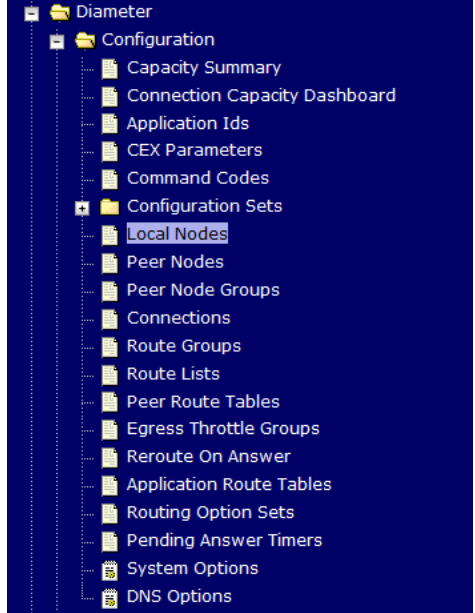
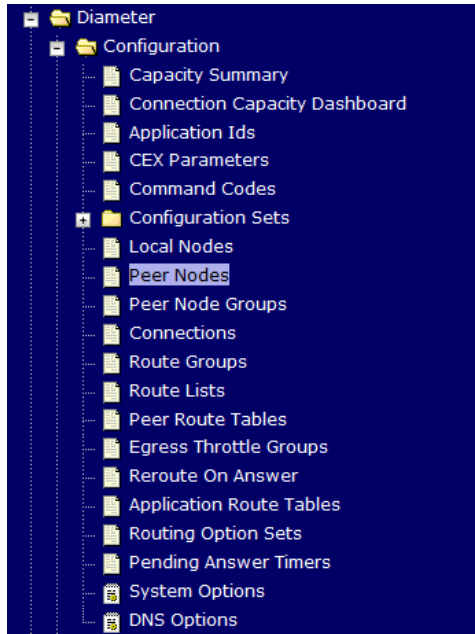
Service Information
-----
Part: A_NpqrProvPart
=====
Table Name          Schema  Row Size  Num  Memory  Disk
                   Avg    Max    Rows  Used / Alloc  Used / Alloc
-----
CgPa                44      1      44 B   44 B   44 B   44 B
CgPaGta            52      0      0 B    0 B    0 B    0 B
CgPaInfo           64      1     64 B   64 B   64 B   64 B
CgPaOpc            36      0      0 B    0 B    0 B    0 B
CountryCode        24      306   7344 B 7344 B 7344 B 7344 B
GTCConfig          52      2    104 B  104 B  104 B  104 B
MocMnc             40      0      0 B    0 B    0 B    0 B
Msisdn             52      0      0 B    0 B    0 B    0 B
Msrn               68      0      0 B    0 B    0 B    0 B
NpqrNeOptions      276     1      0 B    0 B    0 B    0 B
=====
    
```

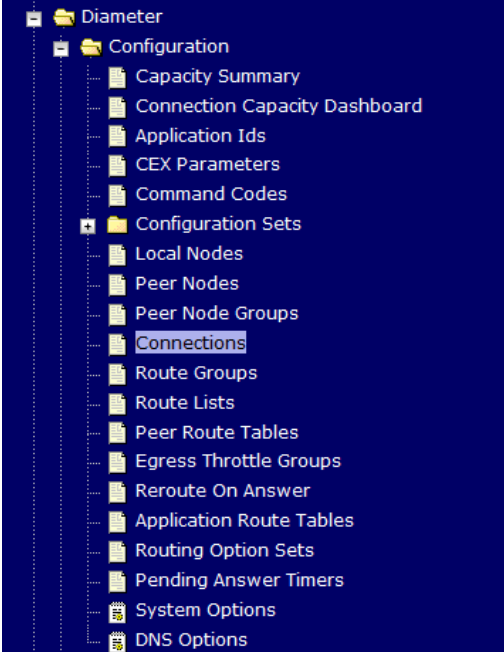
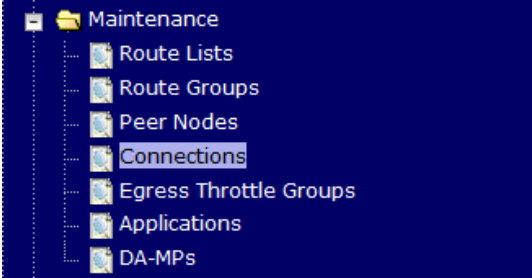
Print Save

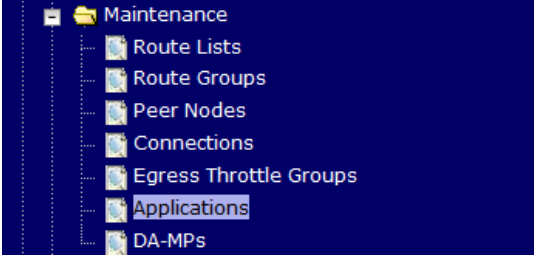



Click on **Save** and save the report to your local machine.

<p>35.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b></p> <p>Verify Replication Between Servers</p>	<p>Login to the Active NOAMP via SSH terminal as <i>admusr</i> user.</p> <p>Execute the following command:</p> <pre>\$ sudo irepstat -m</pre> <p>Output like below shall be generated:</p> <pre>-- Policy 0 ActStb [DbReplication] ----- ----- RDU06-MP1 -- Stby   BC From RDU06-SO1 Active      0   0.50 ^0.17%cpu 42B/s  A=none   CC From RDU06-MP2 Active      0   0.10 ^0.17 0.88%cpu 32B/s  A=none RDU06-MP2 -- Active   BC From RDU06-SO1 Active      0   0.50 ^0.10%cpu 33B/s  A=none   CC To  RDU06-MP1 Active      0   0.10  0.08%cpu 20B/s  A=none RDU06-NO1 -- Active   AB To  RDU06-SO1 Active      0   0.50 1%R 0.03%cpu 21B/s RDU06-SO1 -- Active   AB From RDU06-NO1 Active      0   0.50 ^0.04%cpu 24B/s   BC To  RDU06-MP1 Active      0   0.50 1%R 0.04%cpu 21B/s   BC To  RDU06-MP2 Active      0   0.50 1%R 0.07%cpu 21B/s</pre>																																																																																								
<p>36.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b></p> <p>Verify the Database states</p>	<p>Click on <b>Main Menu</b> → <b>Status and Manager</b> → <b>Database</b></p>  <p>Verify that the “OAM Max HA Role” is either “Active” or “Standby” for NOAMP and SOAM and “Application Max HA Role” for MPs is “Active”, and that the status is “Normal” as shown below:</p> <table border="1" data-bbox="467 1554 1412 1759"> <thead> <tr> <th>Network Element</th> <th>Server</th> <th>Role</th> <th>OAM Max HA Role</th> <th>Application Max HA Role</th> <th>Status</th> <th>DB Level</th> <th>OAM Repl Status</th> <th>SIG Repl Status</th> <th>Repl Status</th> <th>Repl Audit Status</th> </tr> </thead> <tbody> <tr> <td>NO_10303</td> <td>NO2</td> <td>Network OAM&amp;P</td> <td>Active</td> <td>OOS</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>NotApplicabl</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>SO_10303</td> <td>PSBR</td> <td>MP</td> <td>Active</td> <td>Active</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>Normal</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>SO_10303</td> <td>MP2</td> <td>MP</td> <td>Active</td> <td>Active</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>Normal</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>SO_10303</td> <td>SO1</td> <td>System OAM</td> <td>Standby</td> <td>OOS</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>NotApplicabl</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>NO_10303</td> <td>NO1</td> <td>Network OAM&amp;P</td> <td>Standby</td> <td>OOS</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>NotApplicabl</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>SO_10303</td> <td>IPFE</td> <td>MP</td> <td>Active</td> <td>OOS</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>Normal</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>SO_10303</td> <td>SO2</td> <td>System OAM</td> <td>Active</td> <td>OOS</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>NotApplicabl</td> <td>Allowed</td> <td>AutoInProg</td> </tr> </tbody> </table>	Network Element	Server	Role	OAM Max HA Role	Application Max HA Role	Status	DB Level	OAM Repl Status	SIG Repl Status	Repl Status	Repl Audit Status	NO_10303	NO2	Network OAM&P	Active	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg	SO_10303	PSBR	MP	Active	Active	Normal	0	Normal	Normal	Allowed	AutoInProg	SO_10303	MP2	MP	Active	Active	Normal	0	Normal	Normal	Allowed	AutoInProg	SO_10303	SO1	System OAM	Standby	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg	NO_10303	NO1	Network OAM&P	Standby	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg	SO_10303	IPFE	MP	Active	OOS	Normal	0	Normal	Normal	Allowed	AutoInProg	SO_10303	SO2	System OAM	Active	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg
Network Element	Server	Role	OAM Max HA Role	Application Max HA Role	Status	DB Level	OAM Repl Status	SIG Repl Status	Repl Status	Repl Audit Status																																																																																
NO_10303	NO2	Network OAM&P	Active	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg																																																																																
SO_10303	PSBR	MP	Active	Active	Normal	0	Normal	Normal	Allowed	AutoInProg																																																																																
SO_10303	MP2	MP	Active	Active	Normal	0	Normal	Normal	Allowed	AutoInProg																																																																																
SO_10303	SO1	System OAM	Standby	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg																																																																																
NO_10303	NO1	Network OAM&P	Standby	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg																																																																																
SO_10303	IPFE	MP	Active	OOS	Normal	0	Normal	Normal	Allowed	AutoInProg																																																																																
SO_10303	SO2	System OAM	Active	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg																																																																																

<p>37. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Verify the HA Status</p>	<p>Click on <b>Main Menu</b> → <b>Status and Manage</b> → <b>HA</b></p>  <p>Select the row for all of the servers</p> <p>Verify that the “HA Role” is either “Active” or “Standby”.</p> <table border="1" data-bbox="467 661 1412 831"> <thead> <tr> <th>Hostname</th> <th>OAM Max HA Role</th> <th>Application Max HA Role</th> <th>Max Allowed HA Role</th> <th>Mate Hostname List</th> <th>Network Element</th> <th>Server Role</th> <th>Active VIPs</th> </tr> </thead> <tbody> <tr> <td>NO2</td> <td>Active</td> <td>OOS</td> <td>Active</td> <td>NO1</td> <td>NO_10303</td> <td>Network OAM&amp;P</td> <td>10.240.70.132</td> </tr> <tr> <td>SO1</td> <td>Standby</td> <td>OOS</td> <td>Active</td> <td>SO2</td> <td>SO_10303</td> <td>System OAM</td> <td></td> </tr> <tr> <td>SO2</td> <td>Active</td> <td>OOS</td> <td>Active</td> <td>SO1</td> <td>SO_10303</td> <td>System OAM</td> <td>10.240.70.133</td> </tr> <tr> <td>MP1</td> <td>Standby</td> <td>Active</td> <td>Active</td> <td>MP2</td> <td>SO_10303</td> <td>MP</td> <td></td> </tr> <tr> <td>MP2</td> <td>Active</td> <td>Active</td> <td>Active</td> <td>MP1</td> <td>SO_10303</td> <td>MP</td> <td></td> </tr> <tr> <td>IPFE</td> <td>Active</td> <td>OOS</td> <td>Active</td> <td></td> <td>SO_10303</td> <td>MP</td> <td></td> </tr> </tbody> </table>	Hostname	OAM Max HA Role	Application Max HA Role	Max Allowed HA Role	Mate Hostname List	Network Element	Server Role	Active VIPs	NO2	Active	OOS	Active	NO1	NO_10303	Network OAM&P	10.240.70.132	SO1	Standby	OOS	Active	SO2	SO_10303	System OAM		SO2	Active	OOS	Active	SO1	SO_10303	System OAM	10.240.70.133	MP1	Standby	Active	Active	MP2	SO_10303	MP		MP2	Active	Active	Active	MP1	SO_10303	MP		IPFE	Active	OOS	Active		SO_10303	MP	
Hostname	OAM Max HA Role	Application Max HA Role	Max Allowed HA Role	Mate Hostname List	Network Element	Server Role	Active VIPs																																																			
NO2	Active	OOS	Active	NO1	NO_10303	Network OAM&P	10.240.70.132																																																			
SO1	Standby	OOS	Active	SO2	SO_10303	System OAM																																																				
SO2	Active	OOS	Active	SO1	SO_10303	System OAM	10.240.70.133																																																			
MP1	Standby	Active	Active	MP2	SO_10303	MP																																																				
MP2	Active	Active	Active	MP1	SO_10303	MP																																																				
IPFE	Active	OOS	Active		SO_10303	MP																																																				
<p>38.</p>	<p><b>Active NOAMP:</b> Enable Provisioning</p>	<p>Click on <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Database</b></p>  <p>Enable Provisioning by clicking on <b>Enable Provisioning</b> button at the bottom of the screen as shown below.</p>  <p>A confirmation window will appear, press <b>OK</b> to enable Provisioning.</p> 																																																								

<p>39.</p> <p><input type="checkbox"/></p>	<p><b>Active SOAM:</b> Verify the Local Node Info</p>	<p>Navigate to <b>Main Menu</b> → <b>Diameter</b> → <b>Configuration</b> → <b>Local Node</b></p>  <p>Verify that all the local nodes are shown.</p>
<p>40.</p> <p><input type="checkbox"/></p>	<p><b>Active SOAM:</b> Verify the Peer Node Info</p>	<p>Navigate to <b>Main Menu</b> → <b>Diameter</b> → <b>Configuration</b> → <b>Peer Node</b></p>  <p>Verify that all the peer nodes are shown.</p>

<p>41.</p> <p><input type="checkbox"/></p>	<p><b>Active SOAM:</b> Verify the Connections Info</p>	<p>Navigate to <b>Main Menu</b> → <b>Diameter</b> → <b>Configuration</b> → <b>Connections</b></p>  <p>Verify that all the connections are shown.</p>
<p>42.</p> <p><input type="checkbox"/></p>	<p><b>Active SOAM:</b> Enable Connections if needed</p>	<p>Navigate to <b>Main Menu</b> → <b>Diameter</b> → <b>Maintenance</b> → <b>Connections</b></p>  <p>Select each connection and click on the <b>Enable</b> button. Alternatively you can enable all the connections by selecting the <b>EnableAll</b> button.</p> <p> <input type="button" value="Enable"/> <input type="button" value="Disable"/> <input type="button" value="EnableAll"/> <input type="button" value="DisableAll"/> <input type="button" value="Diagnose Start"/> <input type="button" value="Diagnose End"/> <input type="button" value="SCTP STATISTICS"/> <input type="checkbox"/> Pause updates     </p> <p>Verify that the Operational State is Available.</p>

<p>43.</p> <p><input type="checkbox"/></p>	<p><b>Active SOAM:</b> Enable SPR Features</p>	<p>Navigate to <b>Main Menu</b> → <b>Diameter</b> → <b>Maintenance</b> → <b>Applications</b></p>  <p>Select the feature application.</p> <p>Click the <b>Enable</b> button.</p> 
<p>44.</p> <p><input type="checkbox"/></p>	<p><b>Active SOAM:</b> Examine All Alarms</p>	<p>Navigate to <b>Main Menu</b> → <b>Alarms &amp; Events</b> → <b>View Active</b></p>  <p>Examine all active alarms and refer to the on-line help on how to address them.</p> <p>If needed contact My Oracle Support (MOS).</p>
<p>45.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Examine All Alarms</p>	<p>Login to the NOAMP VIP if not already logged in.</p> <p>Navigate to <b>Main Menu</b> → <b>Alarms &amp; Events</b> → <b>View Active</b></p>  <p>Examine all active alarms and refer to the on-line help on how to address them.</p> <p>If needed contact My Oracle Support (MOS).</p>
<p>46.</p> <p><input type="checkbox"/></p>	<p><b>Restore GUI</b> <b>Username and</b> <b>Passwords</b></p>	<p>If applicable, Execute steps in <b>Section 5</b> to recover the user and group information restored.</p>
<p>47.</p> <p><input type="checkbox"/></p>	<p><b>Backup and</b> <b>Archive All the</b> <b>Databases from</b> <b>the Recovered</b> <b>System</b></p>	<p>Execute <b>Appendix A Oracle Communications User Data Repository Database Backup</b> to back up the Configuration databases.</p>
<p><b>THIS PROCEDURE HAS BEEN COMPLETED</b></p>		

## 4.1.2 Recovery Scenario 2 (Partial Server Outage with one NOAMP server intact and both SOAMs failed)

For a partial server outage with an NOAMP server intact and available; SOAM servers are recovered using recovery procedures for software and then executing a database restore to the active SOAM server using a database backup file obtained from the SOAM servers. All other servers are recovered using recovery procedures for software. Database replication from the active NOAMP server will recover the database on these servers. The major activities are summarized in the list below. Use this list to understand the recovery procedure summary. Do not use this list to execute the procedure. The actual procedures' detailed steps are in **Procedure 2**. The major activities are summarized as follows:

Recover **Standby NOAMP** server (*if needed*) by recovering software and the database.

- Recover the software.


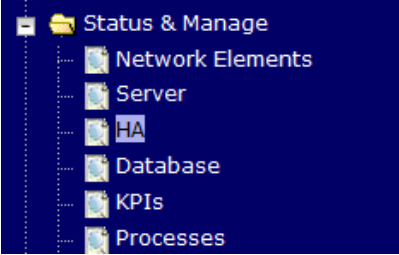
Recover **Active SOAM** server by recovering software.

- Recover the software.
- Recover the Database.

Recover any failed **SOAM and MP** servers by recovering software.


- Recover the software.
- The database has already been restored at the active SOAM server and does not require restoration at the SO and MP servers.

**Procedure 2: Recovery Scenario 2 – Partial Outage One NOAMP Intact**



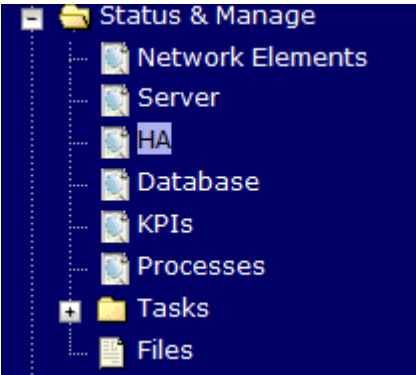
<p><b>S</b> <b>T</b> <b>E</b> <b>P</b> <b>#</b></p>	<p>This procedure performs recovery if at least 1 NOAMP server is available but all SOAM servers in a site have failed. This includes any SOAM server that is in another location.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>If this procedure fails, contact <b>My Oracle Support (MOS)</b>, and ask for assistance.</p>
<p>1. <input type="checkbox"/></p>	<p><b>Gather Required Materials</b></p> <p>Gather the documents and required materials listed in <b>Section Required Materials</b></p>
<p>2. <input type="checkbox"/></p>	<p><b>Active NOAMP: Login</b></p> <p>Establish a GUI session on the NOAMP server by using the VIP IP address of the NOAMP server. Open the web browser and enter a URL of:</p> <div data-bbox="467 653 1321 705" style="border: 1px solid black; padding: 5px; margin: 10px 0;"> <p><code>http://&lt;Primary_NOAMP_VIP_IP_Address&gt;</code></p> </div> <p>Login as the <i>guiadmin</i> user:</p> 
<p>3. <input type="checkbox"/></p>	<p><b>Active NOAMP: Set Failed Servers to Standby</b></p> <p>Navigate to <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>HA</b></p>  <p>Select <b>Edit</b></p> <p>Set the Max Allowed HA Role drop down box to <b>Standby</b> for the failed servers.</p> <p>Select <b>Ok</b></p> <div data-bbox="483 1766 652 1812" style="border: 1px solid gray; padding: 5px; display: inline-block;"> <input type="button" value="Ok"/> <input type="button" value="Cancel"/> </div>





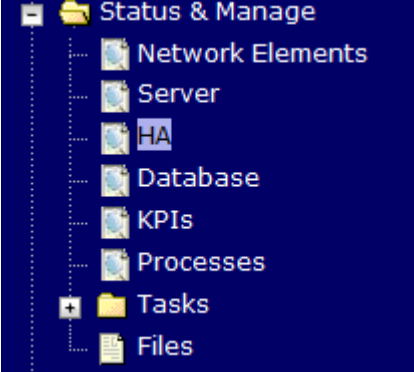
**Procedure 2: Recovery Scenario 2 – Partial Outage One NOAMP Intact**

<p>4.</p> <p><input type="checkbox"/></p>	<p><b>Create VMs</b></p> <p><b>Recover the Failed Software</b></p>	<p>Execute the following procedures from reference <i>Oracle Communications User Data Repository 12.4 Cloud Installation and Configuration Guide</i>, E83397-01, latest revision [2]:</p> <p style="text-align: center;"><b>Procedure 2</b> : Deploy Oracle Communications User Data Repository Virtual Machines on VMware</p>
<p>5.</p> <p><input type="checkbox"/></p>	<p><b>Repeat for Remaining Failed Servers</b></p>	<p>If necessary, repeat <b>step 5</b> for all remaining failed servers.</p>
<p>6.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP: Login</b></p>	<p>Establish a GUI session on the NOAMP server by using the VIP IP address of the NOAMP server. Open the web browser and enter a URL of:</p> <div style="border: 1px solid black; padding: 5px; margin: 10px 0;"> <p><code>http://&lt;Primary_NOAMP_VIP_IP_Address&gt;</code></p> </div> <p>Login as the <b>guiadmin</b> user:</p> 
<p>7.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP: Recover Standby NOAMP</b></p>	<p>Configure the standby NOAMP server by executing procedures from reference <i>Oracle Communications User Data Repository 12.4 Cloud Installation and Configuration Guide</i>, E83397-01, latest revision [2]:</p> <p><b>Procedure 4</b> “Create Configuration for Remaining Servers”, Step 22.</p> <p><b>Procedure 10</b> “Apply Configuration for Remaining Servers” for NOAMP.</p> <p><b>Note:</b> If Topology or nodeId alarms are persistent after the database restore, refer to the steps below.</p>


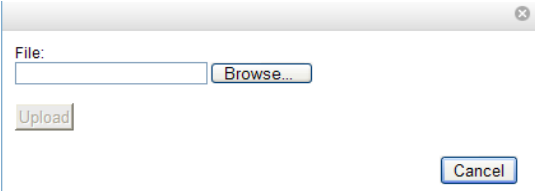
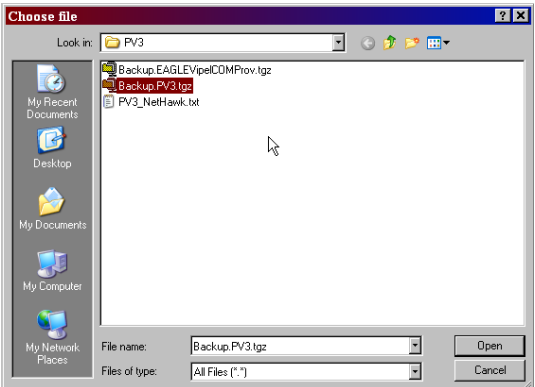
**Procedure 2: Recovery Scenario 2 – Partial Outage One NOAMP Intact**

<p>8.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Restart UDR application on Recovered NOAMP</p>	<p>Navigate to <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Server</b>,</p>  <p>Select the recovered standby NOAMP server and click on <b>Restart</b>.</p> 
<p>9.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Set HA on Recovered NOAMP</p>	<p>Navigate to <b>Status &amp; Manage</b> → <b>HA</b></p>  <p>Click on <b>Edit</b> at the bottom of the screen</p> <p>Select the standby NOAMP server, set it to <b>Active</b></p> <p>Press <b>OK</b></p>
<p>10.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Stop Replication to the MP Servers of this Site.</p>	<p>Inhibit Replication to the working C Level Servers which belong to the <b>same site</b> as the failed SOAM servers, as the recovery of Active SOAM will cause the database wipeout in the C level servers because of the replication</p> <p><b>Execute Appendix B Inhibit A and B Level Replication on C-Level Servers</b></p>


**Procedure 2: Recovery Scenario 2 – Partial Outage One NOAMP Intact**

<p>11. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Recover SOAM Server</p>	<p>Recovery the SOAM server by executing procedures from reference <i>Oracle Communications User Data Repository 12.4 Cloud Installation and Configuration Guide</i>, E83397-01, latest revision [2]:</p> <p><b>Procedure 4</b> “Create Configuration for Remaining Servers”, Step 22.</p> <p><b>Procedure 10</b> “Apply Configuration for Remaining Servers” for SOAM</p>
<p>12. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Restart UDR application on Recovered SOAM</p>	<p>Navigate to <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Server</b></p>  <p>Select the recovered SOAM server and click on <b>Restart</b>.</p> 
<p>13. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Set HA on Recovered SOAM</p>	<p>Navigate to <b>Status &amp; Manage</b> → <b>HA</b></p>  <p>Click on <b>Edit</b> at the bottom of the screen Select the SOAM server, set it to <b>Active</b> Press <b>OK</b></p>

**Procedure 2: Recovery Scenario 2 – Partial Outage One NOAMP Intact**

<p>14. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Upload the backed up SOAM Database file</p>	<p>Navigate to <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Files</b></p> <p>Select the Active SOAM server. The following screen will appear. Click on Upload as shown below and select the file “<i>SO Provisioning and Configuration:</i>” file backed up after initial installation and provisioning.</p>  <p>Click on <b>Browse</b> and Locate the backup file and click on <b>Open</b> as shown below.</p>   <p>Click on the <b>Upload</b> button.</p> <p>The file will take a few seconds to upload depending on the size of the backup data. The file will be visible on the list of entries after the upload is complete.</p>
-------------------------------------	---	--

**Procedure 2: Recovery Scenario 2 – Partial Outage One NOAMP Intact**

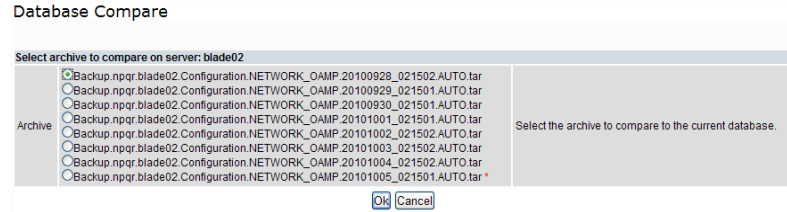
<p>15. <input type="checkbox"/></p>	<p><b>Recovered SOAM: Login</b></p>	<p>Establish a GUI session on the recovered SOAM server. Open the web browser and enter a URL of:</p> <div data-bbox="467 352 1323 415" style="border: 1px solid black; padding: 5px; text-align: center;"><code>http://&lt;Recovered_SOAM_IP_Address&gt;</code></div> <p>Login as the <i>guiadmin</i> user:</p> 
-------------------------------------	-------------------------------------	--

16. **Recovered SOAM:** Verify the Archive Contents and Database Compatibility

Navigate to **Main Menu** → **Status & Manage** → **Database**  
 Select the **Active SOAM** server and click on the **Compare**.

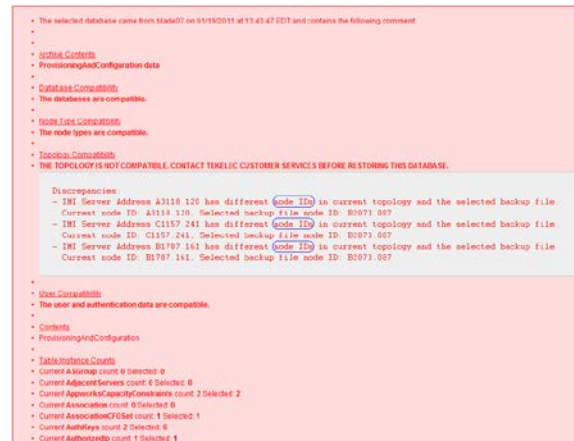


The following screen is displayed; click the button for the restored database file that was uploaded as a part of this procedure.



**Verify** that the output window matches the screen below.

**Note:** You will get a database mismatch regarding the NodeIDs of the VMs. That is expected. If that is the only mismatch, proceed, otherwise stop and contact My Oracle Support (MOS)



**Note:** Archive Contents and Database Compatibilities must be the following:

**Archive Contents:** Configuration data

**Database Compatibility:** The databases are compatible.

**Note:** The following is expected Output for Topology Compatibility Check since we are restoring from existing backed up data base to database with just one SOAM:

**Topology Compatibility**

THE TOPOLOGY SHOULD BE COMPATIBLE MINUS THE NODEID.


**Note:** We are trying to restore a backed up database onto an empty SOAM database. This is an expected text in Topology Compatibility.

If the verification is successful, Click **BACK** button and continue to **next step** in this procedure.

**Procedure 2: Recovery Scenario 2 – Partial Outage One NOAMP Intact**

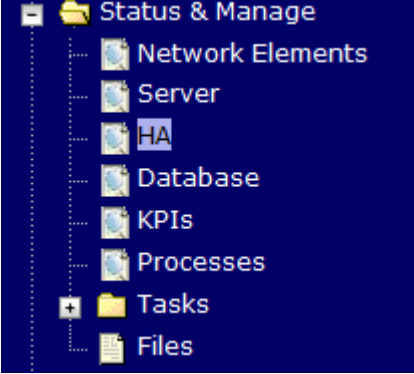
<p>17. <b>Recovered SOAM: Restore the Database</b></p>	<p>Click on <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Database</b></p> <p>Select the <b>Active SOAM</b> server, and click on <b>Restore</b> as shown below.</p> <p>The following screen will be displayed. Select the proper back up provisioning and configuration file.</p> <div style="border: 1px solid #ccc; padding: 5px; margin: 5px 0;"> <p><b>Database Restore</b></p> <p>Select archive to Restore on server: blade02</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%; padding: 2px;">Archive</td> <td style="padding: 2px;"> <input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20100928_021502.AUTO.tar  <input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20100929_021501.AUTO.tar  <input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20100930_021501.AUTO.tar  <input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20101001_021501.AUTO.tar  <input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20101002_021502.AUTO.tar  <input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20101003_021502.AUTO.tar  <input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20101004_021502.AUTO.tar  <input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20101005_021501.AUTO.tar*                 </td> <td style="width: 70%; padding: 2px; vertical-align: top;">Select the archive to restore on blade02.</td> </tr> </table> <p style="text-align: center;"><input type="button" value="OK"/> <input type="button" value="Cancel"/></p> </div> <p>Click <b>OK</b> Button. The following confirmation screen will be displayed.</p> <p><b>Note:</b> You will get a database mismatch regarding the NodeIDs of the servers. That is expected. If that is the only mismatch, proceed, otherwise stop and contact My Oracle Support (MOS).</p> <p>Select the <b>Force</b> checkbox as shown above and Click <b>OK</b> to proceed with the DB restore.</p> <div style="border: 1px solid #ccc; padding: 5px; margin: 5px 0;"> <p><b>Database Restore Confirm</b></p> <p>Incompatible database selected</p> <div style="background-color: #ffe0e0; padding: 5px; border: 1px solid #ccc;"> <p>Discrepancies:</p> <ul style="list-style-type: none"> <li>- IMI Server Address A3118.120 has different node IDs in current topology and the selected backup file.</li> <li>Current node ID: A3118.120, Selected backup file node ID: B2073.087</li> <li>- IMI Server Address C1157.241 has different node IDs in current topology and the selected backup file.</li> <li>Current node ID: C1157.241, Selected backup file node ID: B2073.087</li> <li>- IMI Server Address B1787.161 has different node IDs in current topology and the selected backup file.</li> <li>Current node ID: B1787.161, Selected backup file node ID: B2073.087</li> </ul> </div> <p>Confirm archive "3bladeNPQR.blade07.Configuration.NETWORK_OAMP.20110119_184253.MAN.tar" to Restore on server: blade07</p> <p>Force Restore? <input checked="" type="checkbox"/> Force <input type="button" value="OK"/> <input type="button" value="Cancel"/> Force restore on blade07, despite compare errors.</p> </div> <p><b>Note:</b> After the restore has started, the user will be logged out of XMI SOAM GUI since the restored Topology is old data.</p>	Archive	<input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20100928_021502.AUTO.tar <input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20100929_021501.AUTO.tar <input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20100930_021501.AUTO.tar <input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20101001_021501.AUTO.tar <input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20101002_021502.AUTO.tar <input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20101003_021502.AUTO.tar <input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20101004_021502.AUTO.tar <input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20101005_021501.AUTO.tar*	Select the archive to restore on blade02.
Archive	<input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20100928_021502.AUTO.tar <input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20100929_021501.AUTO.tar <input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20100930_021501.AUTO.tar <input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20101001_021501.AUTO.tar <input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20101002_021502.AUTO.tar <input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20101003_021502.AUTO.tar <input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20101004_021502.AUTO.tar <input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20101005_021501.AUTO.tar*	Select the archive to restore on blade02.		

**Procedure 2: Recovery Scenario 2 – Partial Outage One NOAMP Intact**

<p>18. <input type="checkbox"/></p>	<p><b>Recovered SOAM:</b> Monitor and Confirm database restoral</p>	<p>Wait for <b>5-10 minutes</b> for the System to stabilize with the new topology:</p> <p>Monitor the Info tab for <b>“Success”</b>. This will indicate that the backup is complete and the system is stabilized.</p> <p><b>Note:</b> Do not pay attention to alarms until all the servers in the system are completely restored.</p> <p><b>Note:</b> The Configuration and Maintenance information will be in the same state it was backed up during initial backup.</p>
<p>19. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Recover remaining SOAM Server <b>(HA Deployments Only)</b></p>	<p><b>NOTE:</b> For <b>Non-HA</b> sites <b>SKIP</b> this step</p> <p>Configure the remaining SOAM server by executing procedures from reference <i>Oracle Communications User Data Repository 12.4 Cloud Installation and Configuration Guide</i>, E83397-01, latest revision [2]:</p> <p><b>Procedure 4</b> “Create Configuration for Remaining Servers”, Step 22.</p> <p><b>Procedure 10</b> “Apply Configuration for Remaining Servers” for second SOAM.</p> <p><b>NOTE:</b> Wait for server to reboot before continuing.</p>
<p>20. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Restart UDR application on Recovered SOAM <b>(HA Deployments Only)</b></p>	<p>Navigate to <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Server</b></p>  <p>Select the recovered SOAM server and click on <b>Restart</b>.</p> <div style="display: flex; justify-content: center; gap: 10px;"> <span>Stop</span> <span>Restart</span> <span>Reboot</span> <span>NTP Sync</span> <span>Report</span> </div>






**Procedure 2: Recovery Scenario 2 – Partial Outage One NOAMP Intact**

<p>21. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Set HA on SOAM Servers</p> <p>(HA Deployments Only)</p>	<p><b>NOTE:</b> For <b>Non-HA</b> sites <b>SKIP</b> this step</p> <p>Navigate to <b>Status &amp; Manage</b> → <b>HA</b></p>  <p>Click on <b>Edit</b> at the bottom of the screen</p> <p>For each SOAM server whose Max Allowed HA Role is set to Standby, set it to <b>Active</b></p> <p>Press <b>OK</b></p>
<p>22. <input type="checkbox"/></p>	<p><b>Recovered Servers:</b> Login</p>	<p>Establish an SSH to the recovered server's XMI address:</p>

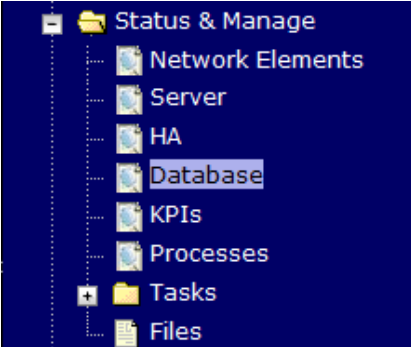

**Procedure 2: Recovery Scenario 2 – Partial Outage One NOAMP Intact**

<p>23.</p> <p><input type="checkbox"/></p>	<p><b>Recovered Servers: Sync NTP</b></p>	<p>1) Perform the following to retrieve the remote NTP server:</p> <pre style="background-color: #f0f0f0; padding: 5px;">\$ sudo ntpq -np</pre> <p>Example output:</p> <pre style="background-color: #f0f0f0; padding: 5px;">[admusr@NOAMP-2 ~]\$ ntpq -np       remote          refid          st t when poll reach  delay  offset  jitter ===== *10.240.9.186      10.250.33.2      3 u  356 1024  377   1.409   0.113 2.434</pre> <p>2) Stop ntpd service:</p> <pre style="background-color: #f0f0f0; padding: 5px;">\$ sudo service ntpd stop</pre> <p>3) Sync the date to the ntp remote server:</p> <pre style="background-color: #f0f0f0; padding: 5px;">\$ sudo ntpdate &lt;NTP remote server&gt;</pre> <p><b>Note:</b> The remote server below will be that of the one gathered in sub step 1.</p> <p>4) Start the ntp service:</p> <pre style="background-color: #f0f0f0; padding: 5px;">\$ sudo service ntpd start</pre>
--	---	---

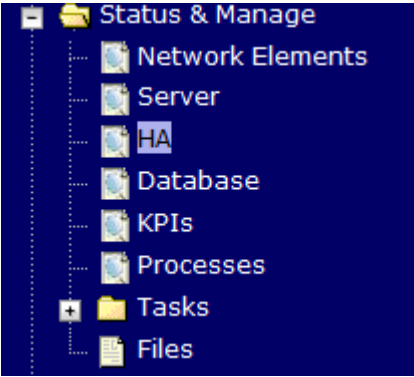
**Procedure 2: Recovery Scenario 2 – Partial Outage One NOAMP Intact**

<p>24. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Restart UDR application on Recovered servers</p> <p><b>(HA Deployments Only)</b></p>	<p><b>NOTE:</b> For <b>Non-HA</b> sites <b>SKIP</b> this step</p> <p>Navigate to <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Server</b>,</p>  <p>Select the recovered server and click on <b>Restart</b>.</p> 
<p>25. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Start Replication on MP Servers</p>	<p>Un-Inhibit (<i>Start</i>) Replication to the <b>MP</b> Servers which belong to the <u>same site as of the failed SOAM</u> servers.</p> <p>Execute <b>Appendix C Un-Inhibit A and B Level Replication on C-Level Servers</b></p> <p>Navigate to <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Database</b></p> <p>If the “<i>Repl Status</i>” is set to “Inhibited”, click on the <b>Allow Replication</b> button as shown below using the following order, otherwise if none of the servers are inhibited, skip this step and continue with the next step:</p> <ul style="list-style-type: none"> <li>• Active NOAMP Server</li> <li>• Standby NOAMP Server</li> <li>• Active SOAM Server</li> <li>• Standby SOAM Server</li> <li>• MP Servers</li> </ul> <p>Verify that the replication on all the working servers is allowed. This can be done by clicking on each server and checking that the button below shows “Inhibit Replication”, and <b>NOT</b> “Allow Replication”.</p> 

**Procedure 2: Recovery Scenario 2 – Partial Outage One NOAMP Intact**

<p>26. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Start replication on ALL Servers</p>	<p>Un-Inhibit (<i>Start</i>) Replication to the <b>ALL</b> C-Level (MP) Servers</p> <p>Navigate to <b>Status &amp; Manage</b> → <b>Database</b></p>  <p>If the “<i>Repl Status</i>” is set to “Inhibited”, click on the Allow Replication button as shown below using the following order:</p> <ul style="list-style-type: none"><li>• Active NOAMPP Server</li><li>• Standby NOAMPP Server</li><li>• Active SOAM Server</li><li>• Standby SOAM Server</li><li>• MP Servers</li></ul> <p>Verify that the replication on all servers is allowed. This can be done by clicking on each server and checking that the button below shows “Inhibit Replication”, and <b>NOT</b> “Allow Replication”.</p> 
-------------------------------------	--	---

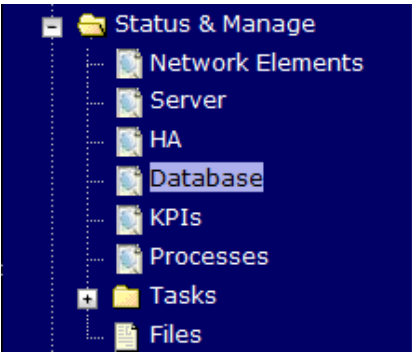
**Procedure 2: Recovery Scenario 2 – Partial Outage One NOAMP Intact**

<p>27.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Set HA on all MP Servers</p>	<p>Navigate to <b>Status &amp; Manage</b> → <b>HA</b></p>  <p>Click on <b>Edit</b> at the bottom of the screen</p> <p>For each server whose Max Allowed HA Role is set to Standby, set it to <b>Active</b></p> <p>Press <b>OK</b></p>
<p>28.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Perform key exchange between the active-NOAMP and recovered servers.</p>	<p>Establish an SSH session to the Active NOAMP, login as <i>admusr</i>.</p> <p>Execute the following command to perform a keyexchange from the active NOAMP to each recovered server:</p> <pre style="border: 1px solid black; padding: 5px; width: fit-content;">\$ keyexchange admusr@&lt;Recovered Server Hostname&gt;</pre> <p><b>Note:</b> If an export server is configured, perform this step.</p>

**Procedure 2: Recovery Scenario 2 – Partial Outage One NOAMP Intact**

29. **Active NOAMP:**  
Fetch and Store the database Report for the Newly Restored Data and Save it

Navigate to **Main Menu → Status & Manage → Database**



Select the **active** NOAMP server and click on the **Report** button at the bottom of the page. The following screen is displayed:

**Main Menu: Status & Manage -> Database [Report]**

```

=====
NPQR Database Status Report
=====
Report Generated: Tue Oct 05 15:13:38 2010 UTC
From: Active Network OAM&P on host blade07
Report Version: 3.0.13-3.0.0_10.13.0
User: guidadmin
=====

General
-----
Hostname                : blade07
Appworks Database Version : 3.0
Application Database Version :
-----

Capacities and Utilization
-----
Disk Utilization    0.6%: 249M used of 40G total, 38G available
Memory Utilization 0.6%: 136M used of 23975M total, 23839M available

Alarms
-----
None

Maintenance in Progress
-----
Restore operation success

Service Information
-----
Part: A_NpqrProvPart

Table Name      Row Size  Num  Memory  Disk
                Schema Avg Max  Rows  Used / Alloc  Used / Alloc
-----
CgPa            44                1  44 B   44 B   44 B
CgPaGta        52                0   0 B   0 B   0 B
CgPaInfo       64                1  64 B   64 B   64 B
CgPaOpc        36                0   0 B   0 B   0 B
CountryCode    24           306 7344 B  7344 B  7344 B
GTConfig       52                2  104 B  104 B  104 B
MccMnc         40                0   0 B   0 B   0 B
Msisdn         52                0   0 B   0 B   0 B
Msrn           68                0   0 B   0 B   0 B
NpqrNeOptions  276               0   0 B   0 B   0 B
=====
                    
```

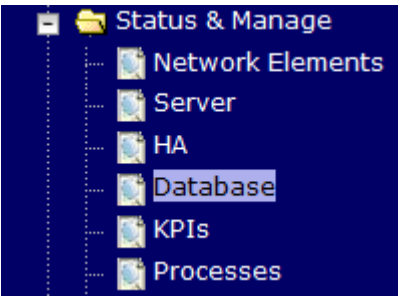
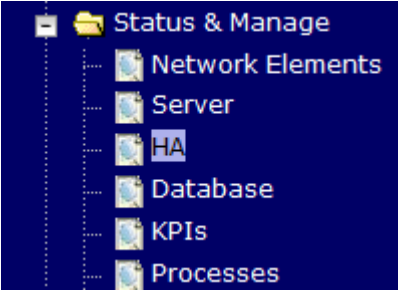
Print Save

Click on **Save** and save the report to your local machine.

**Procedure 2: Recovery Scenario 2 – Partial Outage One NOAMP Intact**

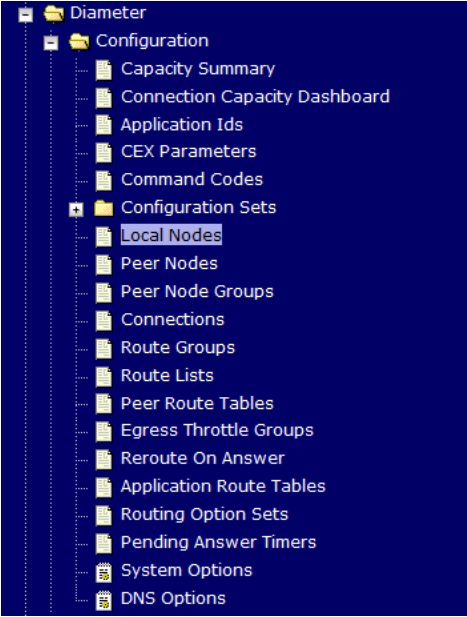
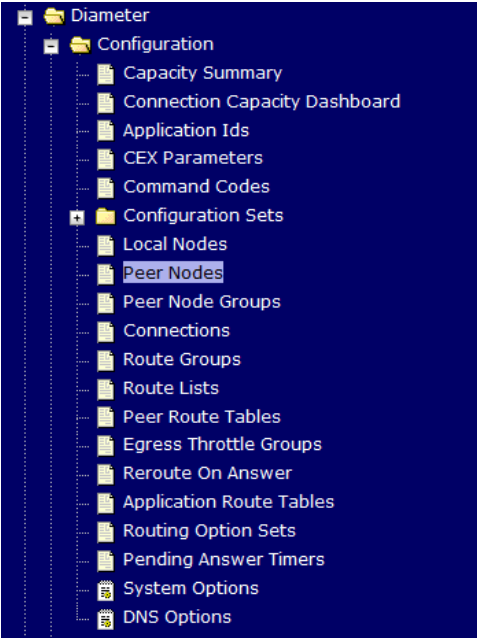
<p>30.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b></p> <p>Verify Replication Between Servers.</p>	<p>Login to the Active NOAMP via SSH terminal as <i>admusr</i> user.</p> <p>Execute the following command:</p> <pre style="background-color: #f0f0f0; padding: 10px;"> \$ sudo irepstat -m  Output like below shall be generated:  -- Policy 0 ActStb [DbReplication] ----- ----- RDU06-MP1 -- Stby   BC From RDU06-S01 Active      0  0.50 ^0.17%cpu 42B/s  A=none   CC From RDU06-MP2 Active      0  0.10 ^0.17 0.88%cpu 32B/s  A=none RDU06-MP2 -- Active   BC From RDU06-S01 Active      0  0.50 ^0.10%cpu 33B/s  A=none   CC To  RDU06-MP1 Active      0  0.10  0.08%cpu 20B/s  A=none RDU06-N01 -- Active   AB To  RDU06-S01 Active      0  0.50 1%R 0.03%cpu 21B/s RDU06-S01 -- Active   AB From RDU06-N01 Active      0  0.50 ^0.04%cpu 24B/s   BC To  RDU06-MP1 Active      0  0.50 1%R 0.04%cpu 21B/s   BC To  RDU06-MP2 Active      0  0.50 1%R 0.07%cpu 21B/s                     </pre>
--	--	--

**Procedure 2: Recovery Scenario 2 – Partial Outage One NOAMP Intact**

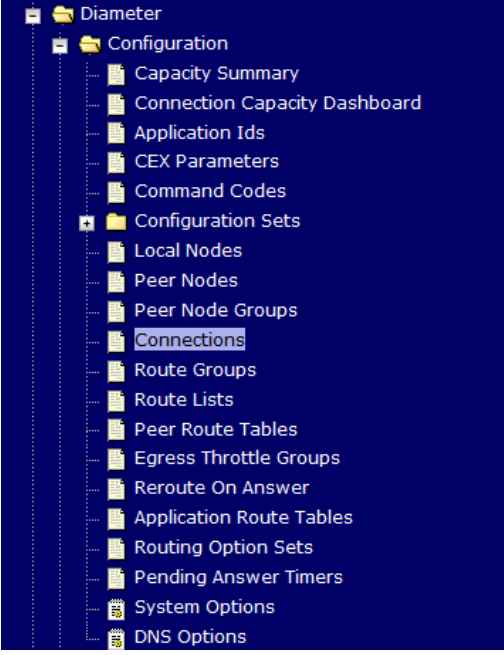
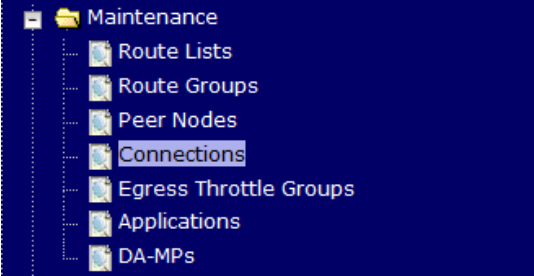

<p>31.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Verify the Database states</p>	<p>Click on <b>Main Menu</b> → <b>Status and Manager</b> → <b>Database</b></p>  <p>Verify that the “OAM Max HA Role” is either “Active” or “Standby” for NOAMP and SOAM and “Application Max HA Role” for MPs is “Active”, and that the status is “Normal” as shown below:</p> <table border="1" data-bbox="467 716 1421 919"> <thead> <tr> <th>Network Element</th> <th>Server</th> <th>Role</th> <th>OAM Max HA Role</th> <th>Application Max HA Role</th> <th>Status</th> <th>DB Level</th> <th>OAM Repl Status</th> <th>SIG Repl Status</th> <th>Repl Status</th> <th>Repl Audit Status</th> </tr> </thead> <tbody> <tr> <td>NO_10303</td> <td>NO2</td> <td>Network OAM&amp;P</td> <td>Active</td> <td>OOS</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>NotApplicabl</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>SO_10303</td> <td>PSBR</td> <td>MP</td> <td>Active</td> <td>Active</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>Normal</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>SO_10303</td> <td>MP2</td> <td>MP</td> <td>Active</td> <td>Active</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>Normal</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>SO_10303</td> <td>SO1</td> <td>System OAM</td> <td>Standby</td> <td>OOS</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>NotApplicabl</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>NO_10303</td> <td>NO1</td> <td>Network OAM&amp;P</td> <td>Standby</td> <td>OOS</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>NotApplicabl</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>SO_10303</td> <td>IPFE</td> <td>MP</td> <td>Active</td> <td>OOS</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>Normal</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>SO_10303</td> <td>SO2</td> <td>System OAM</td> <td>Active</td> <td>OOS</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>NotApplicabl</td> <td>Allowed</td> <td>AutoInProg</td> </tr> </tbody> </table>	Network Element	Server	Role	OAM Max HA Role	Application Max HA Role	Status	DB Level	OAM Repl Status	SIG Repl Status	Repl Status	Repl Audit Status	NO_10303	NO2	Network OAM&P	Active	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg	SO_10303	PSBR	MP	Active	Active	Normal	0	Normal	Normal	Allowed	AutoInProg	SO_10303	MP2	MP	Active	Active	Normal	0	Normal	Normal	Allowed	AutoInProg	SO_10303	SO1	System OAM	Standby	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg	NO_10303	NO1	Network OAM&P	Standby	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg	SO_10303	IPFE	MP	Active	OOS	Normal	0	Normal	Normal	Allowed	AutoInProg	SO_10303	SO2	System OAM	Active	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg
Network Element	Server	Role	OAM Max HA Role	Application Max HA Role	Status	DB Level	OAM Repl Status	SIG Repl Status	Repl Status	Repl Audit Status																																																																																
NO_10303	NO2	Network OAM&P	Active	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg																																																																																
SO_10303	PSBR	MP	Active	Active	Normal	0	Normal	Normal	Allowed	AutoInProg																																																																																
SO_10303	MP2	MP	Active	Active	Normal	0	Normal	Normal	Allowed	AutoInProg																																																																																
SO_10303	SO1	System OAM	Standby	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg																																																																																
NO_10303	NO1	Network OAM&P	Standby	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg																																																																																
SO_10303	IPFE	MP	Active	OOS	Normal	0	Normal	Normal	Allowed	AutoInProg																																																																																
SO_10303	SO2	System OAM	Active	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg																																																																																
<p>32.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Verify the HA Status</p>	<p>Click on <b>Main Menu</b> → <b>Status and Manager</b> → <b>HA</b></p>  <p>Select the row for all of the servers</p> <p>Verify that the “HA Role” is either “Active” or “Standby”.</p> <table border="1" data-bbox="467 1451 1421 1619"> <thead> <tr> <th>Hostname</th> <th>OAM Max HA Role</th> <th>Application Max HA Role</th> <th>Max Allowed HA Role</th> <th>Mate Hostname List</th> <th>Network Element</th> <th>Server Role</th> <th>Active VIPs</th> </tr> </thead> <tbody> <tr> <td>NO2</td> <td>Active</td> <td>OOS</td> <td>Active</td> <td>NO1</td> <td>NO_10303</td> <td>Network OAM&amp;P</td> <td>10.240.70.132</td> </tr> <tr> <td>SO1</td> <td>Standby</td> <td>OOS</td> <td>Active</td> <td>SO2</td> <td>SO_10303</td> <td>System OAM</td> <td></td> </tr> <tr> <td>SO2</td> <td>Active</td> <td>OOS</td> <td>Active</td> <td>SO1</td> <td>SO_10303</td> <td>System OAM</td> <td>10.240.70.133</td> </tr> <tr> <td>MP1</td> <td>Standby</td> <td>Active</td> <td>Active</td> <td>MP2</td> <td>SO_10303</td> <td>MP</td> <td></td> </tr> <tr> <td>MP2</td> <td>Active</td> <td>Active</td> <td>Active</td> <td>MP1</td> <td>SO_10303</td> <td>MP</td> <td></td> </tr> <tr> <td>IPFE</td> <td>Active</td> <td>OOS</td> <td>Active</td> <td></td> <td>SO_10303</td> <td>MP</td> <td></td> </tr> </tbody> </table>	Hostname	OAM Max HA Role	Application Max HA Role	Max Allowed HA Role	Mate Hostname List	Network Element	Server Role	Active VIPs	NO2	Active	OOS	Active	NO1	NO_10303	Network OAM&P	10.240.70.132	SO1	Standby	OOS	Active	SO2	SO_10303	System OAM		SO2	Active	OOS	Active	SO1	SO_10303	System OAM	10.240.70.133	MP1	Standby	Active	Active	MP2	SO_10303	MP		MP2	Active	Active	Active	MP1	SO_10303	MP		IPFE	Active	OOS	Active		SO_10303	MP																																	
Hostname	OAM Max HA Role	Application Max HA Role	Max Allowed HA Role	Mate Hostname List	Network Element	Server Role	Active VIPs																																																																																			
NO2	Active	OOS	Active	NO1	NO_10303	Network OAM&P	10.240.70.132																																																																																			
SO1	Standby	OOS	Active	SO2	SO_10303	System OAM																																																																																				
SO2	Active	OOS	Active	SO1	SO_10303	System OAM	10.240.70.133																																																																																			
MP1	Standby	Active	Active	MP2	SO_10303	MP																																																																																				
MP2	Active	Active	Active	MP1	SO_10303	MP																																																																																				
IPFE	Active	OOS	Active		SO_10303	MP																																																																																				



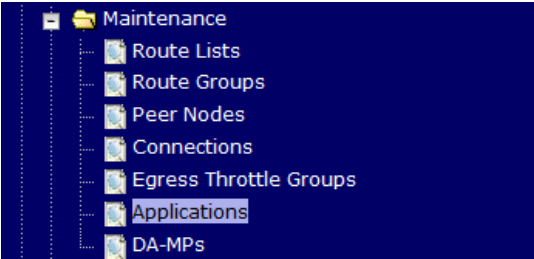


**Procedure 2: Recovery Scenario 2 – Partial Outage One NOAMP Intact**

<p>33.</p> <p><input type="checkbox"/></p>	<p><b>Active SOAM:</b> Verify the Local Node Info</p>	<p>Navigate to <b>Main Menu</b> → <b>Diameter</b> → <b>Configuration</b> → <b>Local Node</b></p>  <p>Verify that all the local nodes are shown.</p>
<p>34.</p> <p><input type="checkbox"/></p>	<p><b>Active SOAM:</b> Verify the Peer Node Info</p>	<p>Navigate to <b>Main Menu</b> → <b>Diameter</b> → <b>Configuration</b> → <b>Peer Node</b></p>  <p>Verify that all the peer nodes are shown.</p>

**Procedure 2: Recovery Scenario 2 – Partial Outage One NOAMP Intact**

<p>35.</p> <p><input type="checkbox"/></p>	<p><b>Active SOAM:</b> Verify the Connections Info</p>	<p>Navigate to <b>Main Menu</b> → <b>Diameter</b> → <b>Configuration</b> → <b>Connections</b></p>  <p>Verify that all the connections are shown.</p>
<p>36.</p> <p><input type="checkbox"/></p>	<p><b>Active SOAM:</b> Enable Connections if needed</p>	<p>Navigate to <b>Main Menu</b> → <b>Diameter</b> → <b>Maintenance</b> → <b>Connections</b></p>  <p>Select each connection and click on the <b>Enable</b> button. Alternatively you can enable all the connections by selecting the <b>EnableAll</b> button.</p>  <p>Verify that the Operational State is Available.</p>

**Procedure 2: Recovery Scenario 2 – Partial Outage One NOAMP Intact**

<p>37. <input type="checkbox"/></p>	<p><b>Active SOAM:</b> Enable SPR Features</p>	<p>Navigate to <b>Main Menu</b> → <b>Diameter</b> → <b>Maintenance</b> → <b>Applications</b></p>  <p>Select the feature application</p> <p>Click the <b>Enable</b> button.</p> <p><input type="button" value="Enable"/> <input type="button" value="Disable"/> <input type="checkbox"/> Pause updates</p>
<p>38. <input type="checkbox"/></p>	<p><b>Active SOAM:</b> Examine All Alarms</p>	<p>Navigate to <b>Main Menu</b> → <b>Alarms &amp; Events</b> → <b>View Active</b></p>  <p>Examine all active alarms and refer to the on-line help on how to address them.</p> <p>If needed contact My Oracle Support (MOS).</p>
<p>39. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Examine All Alarms</p>	<p>Login to the NOAMP VIP if not already logged in.</p> <p>Navigate to <b>Main Menu</b> → <b>Alarms &amp; Events</b> → <b>View Active</b></p>  <p>Examine all active alarms and refer to the on-line help on how to address them.</p> <p>If needed contact My Oracle Support (MOS).</p>
<p>40. <input type="checkbox"/></p>	<p><b>Backup and Archive All the Databases from the Recovered System</b></p>	<p>Execute <b>Appendix A Oracle Communications User Data Repository Database Backup</b> to back up the Configuration database.</p>
<p><b>THIS PROCEDURE HAS BEEN COMPLETED</b></p>		

### 4.1.3 Recovery Scenario 3 (Partial Server Outage with all NOAMP servers failed and one SOAM server intact)

For a partial server outage with an SOAM server intact and available; NOAMP servers are recovered using recovery procedures for software and then executing a database restore to the active NOAMP server using a NOAMP database backup file obtained from external backup sources such as customer servers. All other servers are recovered using recovery procedures for software. Database replication from the active NOAMP/active SOAM server will recover the database on these servers. The major activities are summarized in the list below. Use this list to understand the recovery procedure summary. Do not use this list to execute the procedure. The actual procedures' detailed steps are in **Procedure 3**. The major activities are summarized as follows:

Recover **Active NOAMP** server by recovering software and the database.

- Recover the software.
- Recover the database


Recover **Standby NOAMP servers** by recovering software.

- Recover the software.

Recover any failed **SOAM and MP servers** by recovering software.

- Recover the software.
- Database is already intact at one SOAM server and does not require restoration at the other SOAM and MP servers.


**Procedure 3: Recovery Scenario 3 – Partial Outage One SOAM Intact**

<b>S T E P #</b>	<p>This procedure performs recovery if ALL NOAMP servers are failed but 1 or more SOAM servers are intact.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>If this procedure fails, contact <b>My Oracle Support (MOS)</b>, and ask for assistance.</p>	
1. <input type="checkbox"/>	<b>Gather Required Materials</b>	Gather the documents and required materials listed in <b>Section Required Materials</b>
2. <input type="checkbox"/>	<b>Recover the Failed Software</b>	<p>Execute the following procedures from reference <i>Oracle Communications User Data Repository 12.4 Cloud Installation and Configuration Guide, E83397-01, latest revision</i> [2]:</p> <p style="text-align: center;"><b>Procedure 2</b> : Deploy Oracle Communications User Data Repository Virtual Machines on VMware</p>
3. <input type="checkbox"/>	<b>Obtain Latest Database Backup and Network Configuration Data.</b>	<p>Obtain the most recent database backup file from external backup sources (ex. file servers) or tape backup sources.</p> <p>From required materials list in <b>Section Required Materials</b>; use site survey documents and Network Element report (if available), to determine network configuration data.</p>
4. <input type="checkbox"/>	<b>Execute UDR Installation Procedure for the First NOAMP</b>	<p>Configure the First NOAMP server by executing procedures from reference <i>Oracle Communications User Data Repository 12.4 Cloud Installation and Configuration Guide, E83397-01, latest revision</i> [2]:</p> <p><b>Procedure 3</b> “Configure NOAMP-A Server (1<sup>st</sup> NOAMP Only)” for first NOAMP.</p> <p><b>Note:</b> If Topology or nodeId alarms are persistent after the database restore, refer to the steps below.</p>
5. <input type="checkbox"/>	<b>Active NOAMP: Login</b>	<p>Login to the NOAMP GUI as the <b>guiadmin</b> user:</p> 

**Procedure 3: Recovery Scenario 3 – Partial Outage One SOAM Intact**

6. **Active NOAMP:**  
 Upload the Backed up Database File


Browse to **Main Menu** → **Status & Manage** → **Files**



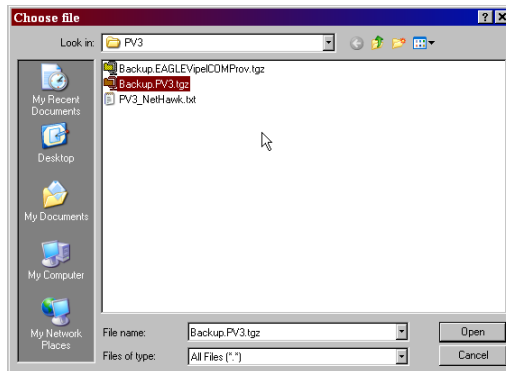
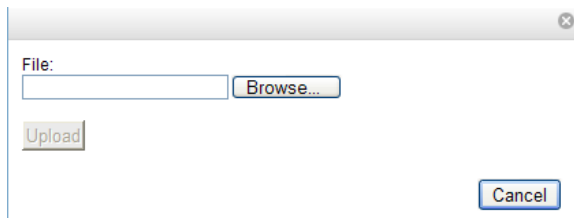
Select the Active NOAMP server. The following screen will appear:

File Name	Size	Type	Timestamp
Backup.dsr.Cpa1-NO.Configuration.NETWORK_OAMP.20120321_021501.AUTO.tar	720 KB	tar	2012-03-21 06:15:02 UTC

Click on **Upload** as shown below and select the file “*NO Provisioning and Configuration:*” file backed up after initial installation and provisioning.



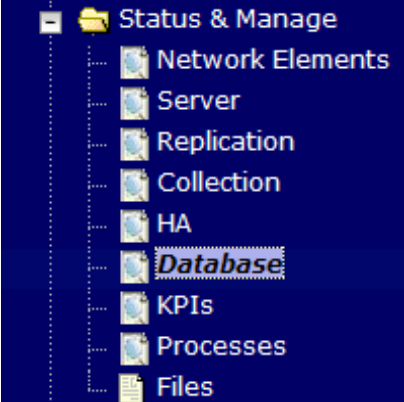


Click on **Browse** and locate the backup file and click on Open as shown below.



Click on the **Upload** button.


The file will take a few seconds to upload depending on the size of the backup data. The file will be visible on the list of entries after the upload is complete.

**Procedure 3: Recovery Scenario 3 – Partial Outage One SOAM Intact**

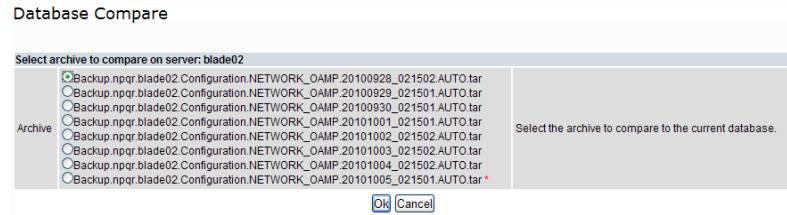
<p>7. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Disable Provisioning</p>	<p>Click on <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Database</b></p>  <p>Disable Provisioning by clicking on <b>Disable Provisioning</b> button at the bottom of the screen as shown below.</p>  <p>A confirmation window will appear, press <b>OK</b> to disable Provisioning.</p>  <p>The message “Warning Code 002” may appear.</p>
------------------------------------	--	---

8. **Active NOAMP:**  
 Verify the Archive Contents and Database Compatibility

Select the **Active NOAMP** server and click on the **Compare**.

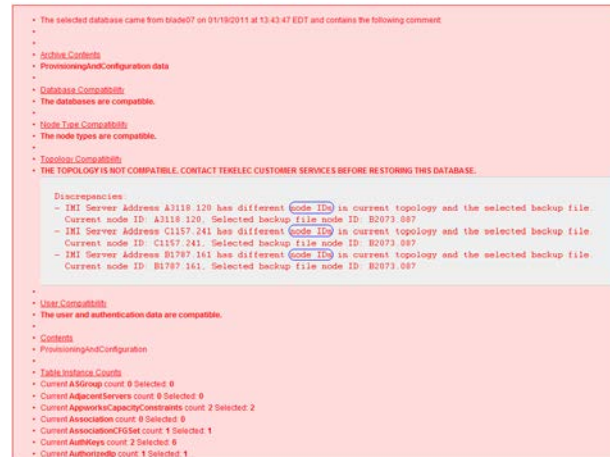


The following screen is displayed; click the button for the restored database file that was uploaded as a part of **Step 13** of this procedure.



**Verify** that the output window matches the screen below.

**Note:** You will get a database mismatch regarding the NodeIDs of the VMs. That is expected. If that is the only mismatch, proceed, otherwise stop and contact My Oracle Support (MOS).



**Note:** Archive Contents and Database Compatibilities must be the following:

**Archive Contents:** Configuration data

**Database Compatibility:** The databases are compatible.

**Note:** The following is expected Output for Topology Compatibility Check since we are restoring from existing backed up data base to database with just one NOAMP:

**Topology Compatibility**

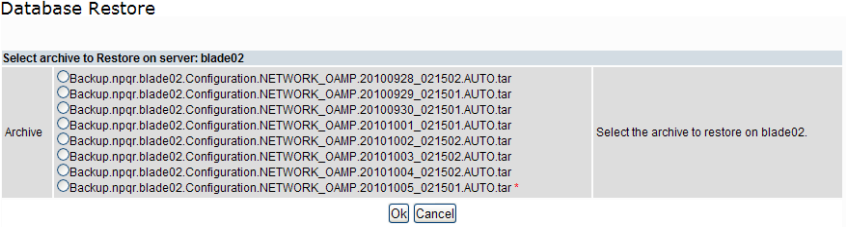
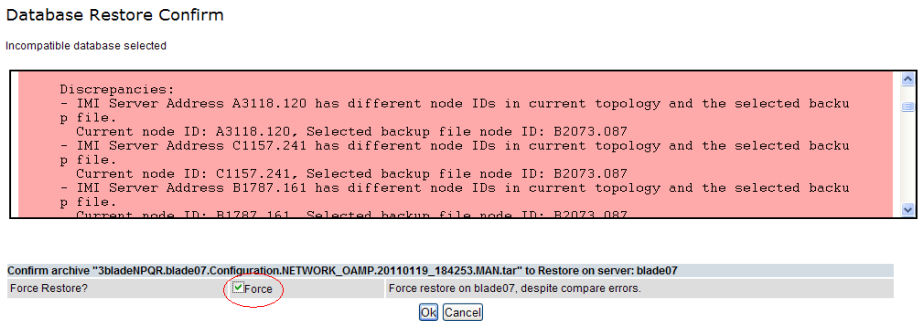
THE TOPOLOGY SHOULD BE COMPATIBLE MINUS THE NODEID.

**Note:** We are trying to restore a backed up database onto an empty NOAMP database. This is an expected text in Topology Compatibility.


If the verification is successful, Click **BACK** button and continue to **next step** in this procedure.





**Procedure 3: Recovery Scenario 3 – Partial Outage One SOAM Intact**

<p>9. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Restore the Database</p>	<p>Click on <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Database</b></p> <p>Select the <b>Active NOAMP</b> server, and click on <b>Restore</b> as shown below.</p> <p>The following screen will be displayed. Select the proper back up provisioning and configuration file.</p>  <p><b>Database Restore</b></p> <p>Select archive to Restore on server: blade02</p> <p>Archive</p> <ul style="list-style-type: none"> <li><input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20100928_021502.AUTO.tar</li> <li><input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20100929_021501.AUTO.tar</li> <li><input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20100930_021501.AUTO.tar</li> <li><input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20101001_021501.AUTO.tar</li> <li><input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20101002_021502.AUTO.tar</li> <li><input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20101003_021502.AUTO.tar</li> <li><input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20101004_021502.AUTO.tar</li> <li><input type="radio"/> Backup.npqr.blade02.Configuration.NETWORK_OAMP.20101005_021501.AUTO.tar*</li> </ul> <p>Select the archive to restore on blade02.</p> <p><input type="button" value="Ok"/> <input type="button" value="Cancel"/></p> <p>Click <b>OK</b> Button. The following confirmation screen will be displayed.</p> <p><b>Note:</b> You will get a database mismatch regarding the NodeIDs of the servers. That is expected. If that is the only mismatch, proceed, otherwise stop and contact My Oracle Support (MOS).</p> <p>Select the <b>Force</b> checkbox as shown above and Click <b>OK</b> to proceed with the DB restore.</p>  <p><b>Database Restore Confirm</b></p> <p>Incompatible database selected</p> <p>Discrepancies:</p> <ul style="list-style-type: none"> <li>- IMI Server Address A3118.120 has different node IDs in current topology and the selected backup file.</li> <li>Current node ID: A3118.120, Selected backup file node ID: B2073.087</li> <li>- IMI Server Address C1157.241 has different node IDs in current topology and the selected backup file.</li> <li>Current node ID: C1157.241, Selected backup file node ID: B2073.087</li> <li>- IMI Server Address B1787.161 has different node IDs in current topology and the selected backup file.</li> <li>Current node ID: B1787.161, Selected backup file node ID: B2073.087</li> </ul> <p>Confirm archive "3bladeNPQR.blade07.Configuration.NETWORK_OAMP.20110119_184253.MAN.tar" to Restore on server: blade07</p> <p>Force Restore? <input checked="" type="checkbox"/> Force <input type="button" value="Ok"/> <input type="button" value="Cancel"/> Force restore on blade07, despite compare errors.</p> <p><b>Note:</b> After the restore has started, the user will be logged out of XMI NO GUI since the restored Topology is old data.</p>
------------------------------------	--	---

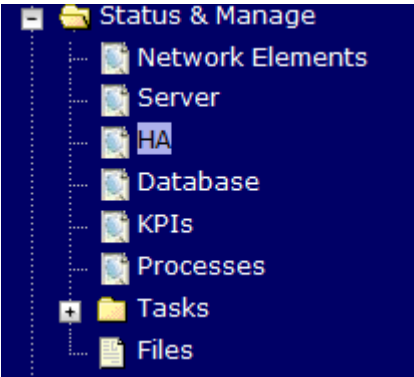
**Procedure 3: Recovery Scenario 3 – Partial Outage One SOAM Intact**

<p>10.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Login</p>	<p>Establish a GUI session on the NOAMP server by using the VIP IP address of the NOAMP server. Open the web browser and enter a URL of:</p> <div style="border: 1px solid black; padding: 5px; margin: 10px 0;"> <pre>http://&lt;Primary_NOAMP_VIP_IP_Address&gt;</pre> </div> <p>Login as the <i>guiadmin</i> user:</p> 
<p>11.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Monitor and Confirm database restoral</p>	<p>Wait for <b>5-10 minutes</b> for the System to stabilize with the new topology:</p> <p>Monitor the Info tab for <b>“Success”</b>. This will indicate that the backup is complete and the system is stabilized.</p> <p>Following alarms <b>must</b> be ignored for NOAMP and MP Servers until all the Servers are configured:</p> <p>Alarms with Type Column as <b>“REPL”</b>, <b>“COLL”</b>, <b>“HA”</b> (with mate NOAMP), <b>“DB”</b> (about Provisioning Manually Disabled)</p> <p><b>Note:</b> Do not pay attention to alarms until all the servers in the system are completely restored.</p> <p><b>Note:</b> The Configuration and Maintenance information will be in the same state it was backed up during initial backup.</p>
<p>12.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Login</p>	<p>Login to the recovered Active NOAMP via SSH terminal as <i>admusr</i> user.</p>
<p>13.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Restore /etc/hosts/ File of the Active NOAMP</p>	<p>Execute the following command:</p> <div style="border: 1px solid black; padding: 5px; margin: 10px 0;"> <pre>\$ sudo AppWorks AppWorks_AppWorks updateServerAliases &lt;NOAMP Host Name&gt;</pre> </div>

**Procedure 3: Recovery Scenario 3 – Partial Outage One SOAM Intact**

<p>14.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Re-enable Provisioning</p>	<p>Navigate to <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Database</b></p>  <p>Click on the <b>Enable Provisioning</b>. A pop-up window will appear to confirm as shown below, press <b>OK</b>.</p> 
<p>15.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Recover Standby NOAMP</p> <p><b>(HA Deployments Only)</b></p>	<p>Configure the second NOAMP server by executing procedures from reference <i>Oracle Communications User Data Repository 12.4 Cloud Installation and Configuration Guide</i>, E83397-01, latest revision [2]:</p> <p><b>Procedure 4</b> “Create Configuration for Remaining Servers”, Step 2.</p> <p><b>Procedure 10</b> “Apply Configuration for Remaining Servers” for second NOAMP.</p> <p><b>Note:</b> If Topology or nodeId alarms are persistent after the database restore, refer to the steps below.</p>
<p>16.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Recover remaining failed SOAM Servers</p>	<p>Repeat <b>Step 7</b> for any SOAM server that needs to be recovered.</p>



**Procedure 3: Recovery Scenario 3 – Partial Outage One SOAM Intact**

<p>17.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Set HA on all C-Level Servers</p>	<p>Navigate to <b>Status &amp; Manage</b> → <b>HA</b></p>  <p>Click on <b>Edit</b> at the bottom of the screen</p> <p>For each server whose Max Allowed HA Role is set to Standby, set it to <b>Active</b></p> <p>Press <b>OK</b></p>
<p>18.</p> <p><input type="checkbox"/></p>	<p><b>Recovered Servers:</b> Login</p>	<p>Establish an SSH to the recovered server's XMI address:</p>

**Procedure 3: Recovery Scenario 3 – Partial Outage One SOAM Intact**

<p>19. <input type="checkbox"/> <b>Recovered Servers:</b> Sync NTP</p>	<p>1) Perform the following to retrieve the remote NTP server:</p> <div style="border: 1px solid black; padding: 5px; margin: 5px 0;"> <pre>\$ sudo ntpq -np</pre> </div> <p>Example output:</p> <pre>[admusr@NOAMP-2 ~]\$ ntpq -np       remote           refid      st t when poll reach  delay  offset  jitter ===== ***** *10.240.9.186      10.250.33.2      3 u  356 1024  377   1.409   0.113  2.434</pre>
	<p>2) Stop ntpd service:</p> <div style="border: 1px solid black; padding: 5px; margin: 5px 0;"> <pre>\$ sudo service ntpd stop</pre> </div>
	<p>3) Sync the date to the ntp remote server:</p> <div style="border: 1px solid black; padding: 5px; margin: 5px 0;"> <pre>\$ sudo ntpdate &lt;NTP remote server&gt;</pre> </div> <p><b>Note:</b> The remote server below will be that of the one gathered in sub step 1.</p>
	<p>4) Start the ntp service:</p> <div style="border: 1px solid black; padding: 5px; margin: 5px 0;"> <pre>\$ sudo service ntpd start</pre> </div>

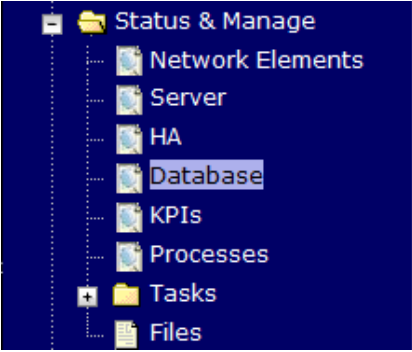
**Procedure 3: Recovery Scenario 3 – Partial Outage One SOAM Intact**

<p>20.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Restart UDR application on recovered servers</p>	<p>Navigate to <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Server</b>,</p>  <p>Select each recovered server and click on <b>Restart</b>.</p> 
<p>21.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Perform key exchange between the active-NOAMP and recovered servers.</p>	<p>Establish an SSH session to the Active NOAMP, login as <i>admusr</i>.</p> <p>Execute the following command to perform a keyexchange from the active NOAMP to each recovered server:</p> <pre style="border: 1px solid black; padding: 5px; background-color: #f0f0f0;">\$ keyexchange admusr@&lt;Recovered Server Hostname&gt;</pre> <p><b>Note:</b> If an export server is configured, perform this step.</p>

**Procedure 3: Recovery Scenario 3 – Partial Outage One SOAM Intact**

22. **Active NOAMP:**  
Fetch and Store the database Report for the Newly Restored Data and Save it

Navigate to **Main Menu** → **Status & Manage** → **Database**



Select the **active** NOAMP server and click on the **Report** button at the bottom of the page. The following screen is displayed:

**Main Menu: Status & Manage -> Database [Report]** Help

Tue Oct 05 15:13:38 2010 UTC

```

=====
NPQR Database Status Report
=====
Report Generated: Tue Oct 05 15:13:38 2010 UTC
From: Active Network OAM&P on host blade07
Report Version: 3.0.13-3.0.0_10.13.0
User: guadmin
=====

General
-----
Hostname                : blade07
Appworks Database Version : 3.0
Application Database Version :
-----

Capacities and Utilization
-----
Disk Utilization    0.6%: 249M used of 40G total, 38G available
Memory Utilization  0.6%: 136M used of 23975M total, 23839M available
-----

Alarms
-----
None
-----

Maintenance in Progress
-----
Restore operation success
-----

Service Information
-----
Part: A_NpqrProvPart
-----

```

Table Name	Schema	Row Size Avg Max	Num Rows	Memory Used / Alloc	Disk Used / Alloc
CgPa		44	1	44 B	44 B
CgPaGta		52	0	0 B	0 B
CgPaInfo		64	1	64 B	64 B
CgPaOpc		36	0	0 B	0 B
CountryCode		24	306	7344 B	7344 B
GTConfig		52	2	104 B	104 B
MccMnc		40	0	0 B	0 B
Msisdn		52	0	0 B	0 B
Msrn		68	0	0 B	0 B
NpqrNeOptions		276	0	0 B	0 B

Print Save

Click on **Save** and save the report to your local machine.

Release 12.4

71

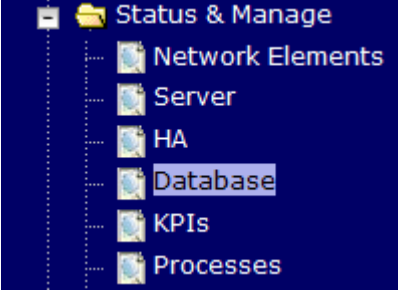
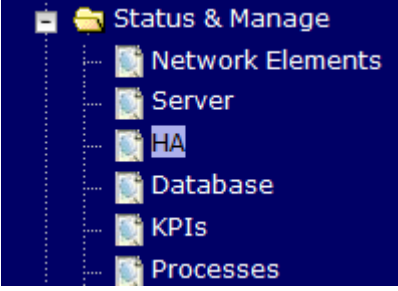
March 2018

**Procedure 3: Recovery Scenario 3 – Partial Outage One SOAM Intact**

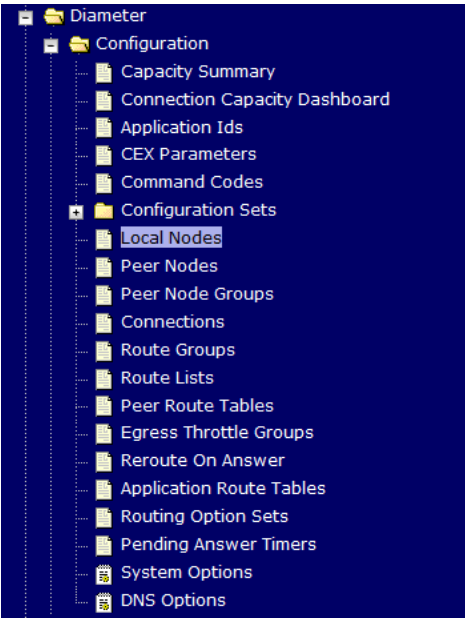
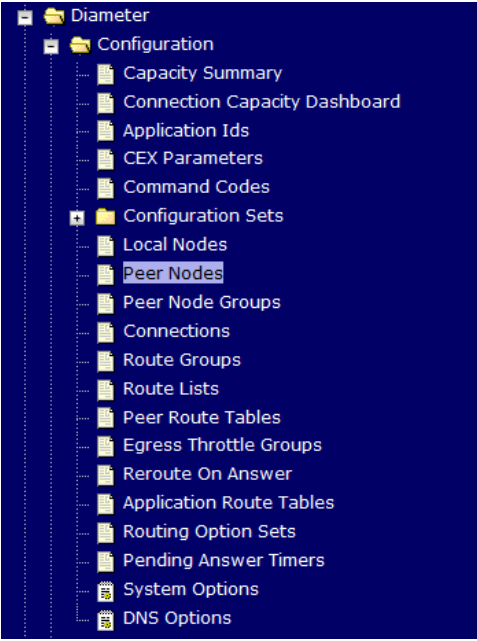
<p>23.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b></p> <p>Verify Replication Between Servers.</p>	<p>Login to the Active NOAMP via SSH terminal as <i>admusr</i> user.</p> <p>Execute the following command:</p> <pre style="background-color: #f0f0f0; padding: 10px;"> \$ sudo irepstat -m  Output like below shall be generated:  -- Policy 0 ActStb [DbReplication] ----- ----- RDU06-MP1 -- Stby   BC From RDU06-SO1 Active      0  0.50 ^0.17%cpu 42B/s  A=none   CC From RDU06-MP2 Active      0  0.10 ^0.17 0.88%cpu 32B/s  A=none RDU06-MP2 -- Active   BC From RDU06-SO1 Active      0  0.50 ^0.10%cpu 33B/s  A=none   CC To  RDU06-MP1 Active      0  0.10  0.08%cpu 20B/s  A=none RDU06-NO1 -- Active   AB To  RDU06-SO1 Active      0  0.50 1%R 0.03%cpu 21B/s RDU06-SO1 -- Active   AB From RDU06-NO1 Active      0  0.50 ^0.04%cpu 24B/s   BC To  RDU06-MP1 Active      0  0.50 1%R 0.04%cpu 21B/s   BC To  RDU06-MP2 Active      0  0.50 1%R 0.07%cpu 21B/s                 </pre>
--	--	--



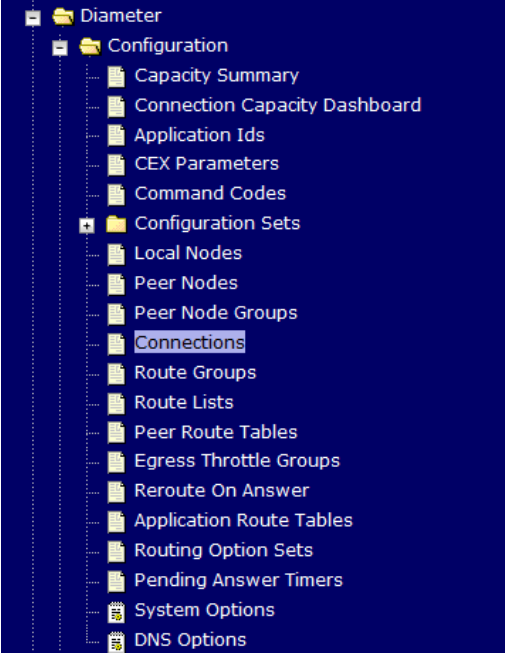
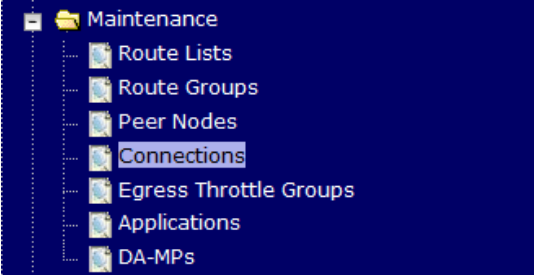
**Procedure 3: Recovery Scenario 3 – Partial Outage One SOAM Intact**

<p>24. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Verify the Database states</p>	<p>Click on <b>Main Menu</b> → <b>Status and Manager</b> → <b>Database</b></p>  <p>Verify that the “OAM Max HA Role” is either “Active” or “Standby” for NOAMP and SOAM and “Application Max HA Role” for MPs is “Active”, and that the status is “Normal” as shown below:</p> <table border="1" data-bbox="467 745 1412 955"> <thead> <tr> <th>Network Element</th> <th>Server</th> <th>Role</th> <th>OAM Max HA Role</th> <th>Application Max HA Role</th> <th>Status</th> <th>DB Level</th> <th>OAM Repl Status</th> <th>SIG Repl Status</th> <th>Repl Status</th> <th>Repl Audit Status</th> </tr> </thead> <tbody> <tr> <td>NO_10303</td> <td>NO2</td> <td>Network OAM&amp;P</td> <td>Active</td> <td>OOS</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>NotApplicabl</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>SO_10303</td> <td>PSBR</td> <td>MP</td> <td>Active</td> <td>Active</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>Normal</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>SO_10303</td> <td>MP2</td> <td>MP</td> <td>Active</td> <td>Active</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>Normal</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>SO_10303</td> <td>SO1</td> <td>System OAM</td> <td>Standby</td> <td>OOS</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>NotApplicabl</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>NO_10303</td> <td>NO1</td> <td>Network OAM&amp;P</td> <td>Standby</td> <td>OOS</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>NotApplicabl</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>SO_10303</td> <td>IPFE</td> <td>MP</td> <td>Active</td> <td>OOS</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>Normal</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>SO_10303</td> <td>SO2</td> <td>System OAM</td> <td>Active</td> <td>OOS</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>NotApplicabl</td> <td>Allowed</td> <td>AutoInProg</td> </tr> </tbody> </table>	Network Element	Server	Role	OAM Max HA Role	Application Max HA Role	Status	DB Level	OAM Repl Status	SIG Repl Status	Repl Status	Repl Audit Status	NO_10303	NO2	Network OAM&P	Active	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg	SO_10303	PSBR	MP	Active	Active	Normal	0	Normal	Normal	Allowed	AutoInProg	SO_10303	MP2	MP	Active	Active	Normal	0	Normal	Normal	Allowed	AutoInProg	SO_10303	SO1	System OAM	Standby	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg	NO_10303	NO1	Network OAM&P	Standby	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg	SO_10303	IPFE	MP	Active	OOS	Normal	0	Normal	Normal	Allowed	AutoInProg	SO_10303	SO2	System OAM	Active	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg
Network Element	Server	Role	OAM Max HA Role	Application Max HA Role	Status	DB Level	OAM Repl Status	SIG Repl Status	Repl Status	Repl Audit Status																																																																																
NO_10303	NO2	Network OAM&P	Active	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg																																																																																
SO_10303	PSBR	MP	Active	Active	Normal	0	Normal	Normal	Allowed	AutoInProg																																																																																
SO_10303	MP2	MP	Active	Active	Normal	0	Normal	Normal	Allowed	AutoInProg																																																																																
SO_10303	SO1	System OAM	Standby	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg																																																																																
NO_10303	NO1	Network OAM&P	Standby	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg																																																																																
SO_10303	IPFE	MP	Active	OOS	Normal	0	Normal	Normal	Allowed	AutoInProg																																																																																
SO_10303	SO2	System OAM	Active	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg																																																																																
<p>25. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Verify the HA Status</p>	<p>Click on <b>Main Menu</b> → <b>Status and Manager</b> → <b>HA</b></p>  <p>Select the row for all of the servers</p> <p>Verify that the “HA Role” is either “Active” or “Standby”.</p> <table border="1" data-bbox="467 1486 1412 1659"> <thead> <tr> <th>Hostname</th> <th>OAM Max HA Role</th> <th>Application Max HA Role</th> <th>Max Allowed HA Role</th> <th>Mate Hostname List</th> <th>Network Element</th> <th>Server Role</th> <th>Active VIPs</th> </tr> </thead> <tbody> <tr> <td>NO2</td> <td>Active</td> <td>OOS</td> <td>Active</td> <td>NO1</td> <td>NO_10303</td> <td>Network OAM&amp;P</td> <td>10.240.70.132</td> </tr> <tr> <td>SO1</td> <td>Standby</td> <td>OOS</td> <td>Active</td> <td>SO2</td> <td>SO_10303</td> <td>System OAM</td> <td></td> </tr> <tr> <td>SO2</td> <td>Active</td> <td>OOS</td> <td>Active</td> <td>SO1</td> <td>SO_10303</td> <td>System OAM</td> <td>10.240.70.133</td> </tr> <tr> <td>MP1</td> <td>Standby</td> <td>Active</td> <td>Active</td> <td>MP2</td> <td>SO_10303</td> <td>MP</td> <td></td> </tr> <tr> <td>MP2</td> <td>Active</td> <td>Active</td> <td>Active</td> <td>MP1</td> <td>SO_10303</td> <td>MP</td> <td></td> </tr> <tr> <td>IPFE</td> <td>Active</td> <td>OOS</td> <td>Active</td> <td></td> <td>SO_10303</td> <td>MP</td> <td></td> </tr> </tbody> </table>	Hostname	OAM Max HA Role	Application Max HA Role	Max Allowed HA Role	Mate Hostname List	Network Element	Server Role	Active VIPs	NO2	Active	OOS	Active	NO1	NO_10303	Network OAM&P	10.240.70.132	SO1	Standby	OOS	Active	SO2	SO_10303	System OAM		SO2	Active	OOS	Active	SO1	SO_10303	System OAM	10.240.70.133	MP1	Standby	Active	Active	MP2	SO_10303	MP		MP2	Active	Active	Active	MP1	SO_10303	MP		IPFE	Active	OOS	Active		SO_10303	MP																																	
Hostname	OAM Max HA Role	Application Max HA Role	Max Allowed HA Role	Mate Hostname List	Network Element	Server Role	Active VIPs																																																																																			
NO2	Active	OOS	Active	NO1	NO_10303	Network OAM&P	10.240.70.132																																																																																			
SO1	Standby	OOS	Active	SO2	SO_10303	System OAM																																																																																				
SO2	Active	OOS	Active	SO1	SO_10303	System OAM	10.240.70.133																																																																																			
MP1	Standby	Active	Active	MP2	SO_10303	MP																																																																																				
MP2	Active	Active	Active	MP1	SO_10303	MP																																																																																				
IPFE	Active	OOS	Active		SO_10303	MP																																																																																				

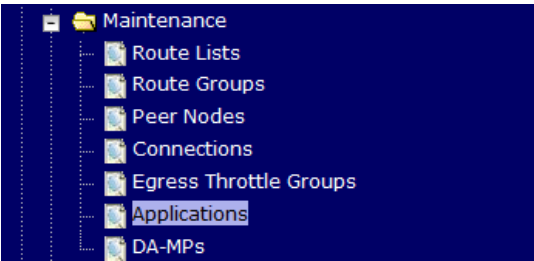



**Procedure 3: Recovery Scenario 3 – Partial Outage One SOAM Intact**

<p>26.</p> <p><input type="checkbox"/></p>	<p><b>Active SOAM:</b> Verify the Local Node Info</p>	<p>Navigate to <b>Main Menu</b> → <b>Diameter</b> → <b>Configuration</b> → <b>Local Node</b></p>  <p>Verify that all the local nodes are shown.</p>
<p>27.</p> <p><input type="checkbox"/></p>	<p><b>Active SOAM:</b> Verify the Peer Node Info</p>	<p>Navigate to <b>Main Menu</b> → <b>Diameter</b> → <b>Configuration</b> → <b>Peer Node</b></p>  <p>Verify that all the peer nodes are shown.</p>

**Procedure 3: Recovery Scenario 3 – Partial Outage One SOAM Intact**

<p>28.</p> <p><input type="checkbox"/></p>	<p><b>Active SOAM:</b> Verify the Connections Info</p>	<p>Navigate to <b>Main Menu</b> → <b>Diameter</b> → <b>Configuration</b> → <b>Connections</b></p>  <p>Verify that all the connections are shown.</p>
<p>29.</p> <p><input type="checkbox"/></p>	<p><b>Active SOAM:</b> Enable Connections if needed</p>	<p>Navigate to <b>Main Menu</b> → <b>Diameter</b> → <b>Maintenance</b> → <b>Connections</b></p>  <p>Select each connection and click on the <b>Enable</b> button. Alternatively you can enable all the connections by selecting the <b>EnableAll</b> button.</p> <p> <input type="button" value="Enable"/> <input type="button" value="Disable"/> <input type="button" value="EnableAll"/> <input type="button" value="DisableAll"/> <input type="button" value="Diagnose Start"/> <input type="button" value="Diagnose End"/> <input type="button" value="SCTP STATISTICS"/> <input type="checkbox"/> Pause updates         </p> <p>Verify that the Operational State is Available.</p>

**Procedure 3: Recovery Scenario 3 – Partial Outage One SOAM Intact**

<p>30.</p> <p><input type="checkbox"/></p>	<p><b>Active SOAM:</b> Enable Optional Features</p>	<p>Navigate to <b>Main Menu</b> → <b>Diameter</b> → <b>Maintenance</b> → <b>Applications</b></p>  <p>Select the SPR feature application.</p> <p>Click the <b>Enable</b> button.</p> 
<p>31.</p> <p><input type="checkbox"/></p>	<p><b>Active SOAM:</b> Examine All Alarms</p>	<p>Navigate to <b>Main Menu</b> → <b>Alarms &amp; Events</b> → <b>View Active</b></p>  <p>Examine all active alarms and refer to the on-line help on how to address them.</p> <p>If needed contact My Oracle Support (MOS).</p>
<p>32.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Examine All Alarms</p>	<p>Login to the NOAMP VIP if not already logged in.</p> <p>Navigate to <b>Main Menu</b> → <b>Alarms &amp; Events</b> → <b>View Active</b></p>  <p>Examine all active alarms and refer to the on-line help on how to address them.</p> <p>If needed contact My Oracle Support (MOS).</p>
<p>33.</p> <p><input type="checkbox"/></p>	<p><b>Restore GUI</b> <b>Usernames and</b> <b>Passwords</b></p>	<p>If applicable, Execute steps in <b>Section 5</b> to recover the user and group information restored.</p>

**Procedure 3: Recovery Scenario 3 – Partial Outage One SOAM Intact**

34.	<b>Backup and Archive All the Databases from the Recovered System</b>	Execute <b>Appendix A Oracle Communications User Data Repository Database Backup</b> to back up the Configuration databases.
<b>THIS PROCEDURE HAS BEEN COMPLETED</b>		

**4.1.4 Recovery Scenario 4 (Partial Server Outage with one NOAMP server and one SOAM server intact)**

For a partial outage with an NOAMP server and an SOAM server intact and available, only base recovery of software is needed. The intact NO and SOAM servers are capable of restoring the database via replication to all servers. The major activities are summarized in the list below. Use this list to understand the recovery procedure summary. Do not use this list to execute the procedure. The actual procedures’ detailed steps are in Procedure 4. The major activities are summarized as follows:

Recover Standby NOAMP server by recovering software.

- Recover the software.


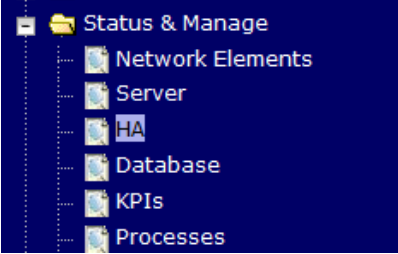
The database is intact at the active NOAMP server and does not require restoration at the standby NOAMP server.

- Recover any failed SO and MP servers by recovering software.
- Recover the software.


The database is intact at the active NOAMP server and does not require restoration at the SO and MP servers.

- Re-apply signaling networks configuration if the failed VM is an MP.

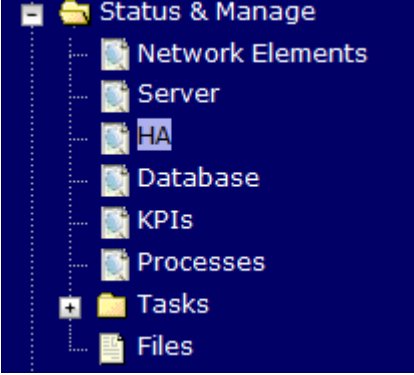
**Procedure 4: Recovery Scenario 4 – Partial Outage One NOAMP & One SOAM Intact**

<p><b>S</b> <b>T</b> <b>E</b> <b>P</b> <b>#</b></p>	<p>This procedure performs recovery if at least 1 NOAMP server is intact and available and 1 SOAM server is intact and available.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>If this procedure fails, contact <b>My Oracle Support (MOS)</b>, and ask for assistance.</p>	
<p>1. <input type="checkbox"/></p>	<p><b>Gather Required Materials</b></p>	<p>Gather the documents and required materials listed in <b>Section 3.1 Required Materials</b></p>
<p>2. <input type="checkbox"/></p>	<p><b>Active NOAMP: Login</b></p>	<p>Establish a GUI session on the NOAMP server by using the VIP IP address of the NOAMP server. Open the web browser and enter a URL of:</p> <div data-bbox="467 653 1321 709" style="border: 1px solid black; padding: 5px; margin: 10px 0;"> <p><code>http://&lt;Primary_NOAMP_VIP_IP_Address&gt;</code></p> </div> <p>Login as the <i>guiadmin</i> user:</p> 
<p>3. <input type="checkbox"/></p>	<p><b>Active NOAMP: Set Failed Servers to Standby</b></p>	<p>Navigate to <b>Main Menu → Status &amp; Manage → HA</b></p>  <p>Select <b>Edit</b></p> <p>Set the Max Allowed HA Role drop down box to <b>Standby</b> for the failed servers.</p> <p>Select <b>Ok</b></p> <div data-bbox="483 1703 651 1745" style="border: 1px solid gray; padding: 5px; display: inline-block;"> <p>Ok Cancel</p> </div>

**Procedure 4: Recovery Scenario 4 – Partial Outage One NOAMP & One SOAM Intact**

<p>4. <input type="checkbox"/></p>	<p><b>Recover the Failed Software</b></p>	<p>Execute the following procedures from reference <i>Oracle Communications User Data Repository 12.4 Cloud Installation and Configuration Guide</i>, E83397-01, latest revision [2]:</p> <p style="text-align: center;"><b>Procedure 2</b> : Deploy Oracle Communications User Data Repository Virtual Machines on VMware</p>
<p>5. <input type="checkbox"/></p>	<p><b>Repeat for Remaining Failed Servers</b></p>	<p>If necessary, repeat 4 for all remaining failed servers.</p>
<p>6. <input type="checkbox"/></p>	<p><b>Active NOAMP: Login</b></p>	<p>Establish a GUI session on the NOAMP server by using the VIP IP address of the NOAMP server. Open the web browser and enter a URL of:</p> <div style="border: 1px solid black; padding: 5px; margin: 10px 0;"> <p><code>http://&lt;Primary_NOAMP_VIP_IP_Address&gt;</code></p> </div> <p>Login as the <i>guiadmin</i> user:</p> 
<p>7. <input type="checkbox"/></p>	<p><b>Active NOAMP: Recover Standby NOAMP if needed</b></p>	<p>Configure the second NOAMP server by executing procedures from reference <i>Oracle Communications User Data Repository 12.4 Cloud Installation and Configuration Guide</i>, E83397-01, latest revision [2]:</p> <p><b>Procedure 4</b> “Create Configuration for Remaining Servers”, Step 2.</p> <p><b>Procedure 10</b> “Apply Configuration for Remaining Servers”</p> <p><b>Note:</b> If Topology or nodeId alarms are persistent after the database restore, refer to the steps below.</p>

**Procedure 4: Recovery Scenario 4 – Partial Outage One NOAMP & One SOAM Intact**





<p>8.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Recover the Failed SOAM Servers if needed</p>	<p>Repeat <b>Step 7</b> for any SOAM server that needs to be recovered.</p>
<p>9.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Set HA on Recovered Servers</p>	<p>Navigate to <b>Status &amp; Manage</b> → <b>HA</b></p>  <p>Click on <b>Edit</b> at the bottom of the screen</p> <p>For each server whose Max Allowed HA Role is set to Standby, set it to <b>Active</b></p> <p>Press <b>OK</b></p>
<p>10.</p>	<p><b>Recovered Servers:</b> Login</p>	<p>Establish an SSH to the recovered server's XMI address:</p>



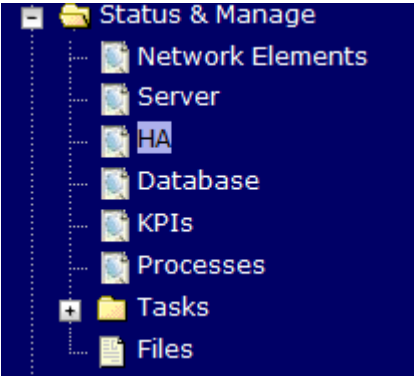
**Procedure 4: Recovery Scenario 4 – Partial Outage One NOAMP & One SOAM Intact**

<p>11.</p>	<p><b>Recovered Servers:</b> Sync NTP</p>	<p>1) Perform the following to retrieve the remote NTP server:</p> <pre style="background-color: #f0f0f0; padding: 10px;">\$ sudo ntpq -np</pre> <p>Example output:</p> <pre style="background-color: #f0f0f0; padding: 10px;">[admusr@NOAMP-2 ~]\$ ntpq -np       remote           refid      st t when poll reach  delay  offset  jitter ===== *10.240.9.186      10.250.33.2      3 u  356 1024  377   1.409   0.113  2.434</pre> <p>2) Stop ntpd service:</p> <pre style="background-color: #f0f0f0; padding: 10px;">\$ sudo service ntpd stop</pre> <p>3) Sync the date to the ntp remote server:</p> <pre style="background-color: #f0f0f0; padding: 10px;">\$ sudo ntpdate &lt;NTP remote server&gt;</pre> <p><b>Note:</b> The remote server below will be that of the one gathered in sub step 1.</p> <p>4) Start the ntp service:</p> <pre style="background-color: #f0f0f0; padding: 10px;">\$ sudo service ntpd start</pre>
------------	---	--

**Procedure 4: Recovery Scenario 4 – Partial Outage One NOAMP & One SOAM Intact**

<p>12.</p>	<p><b>Active NOAMP:</b> Restart UDR application on recovered SOAM</p>	<p>Navigate to <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Server</b></p>  <p>Select the recovered server and click on <b>Restart</b>.</p> 
<p>13.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Recover MP Servers</p>	<p>Recover the MP server(s) by executing procedures from reference <i>Oracle Communications User Data Repository 12.4 Cloud Installation and Configuration Guide</i>, E83397-01, latest revision [2]:</p> <p><b>Procedure 4</b> “Create Configuration for Remaining Servers”, Step 2  <b>Procedure 10</b> “Apply Configuration for Remaining Servers” for MP(s)</p>
<p>14.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Restart UDR Application on recovered MP servers.</p>	<p>Navigate to <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Server</b></p>  <p>Select the recovered servers and click on <b>Restart</b>.</p> 

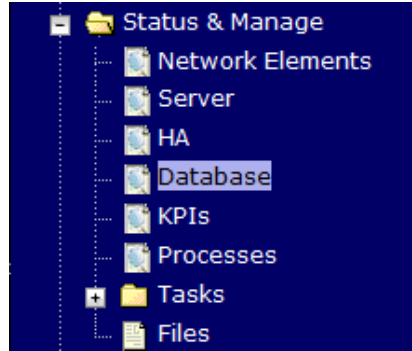
**Procedure 4: Recovery Scenario 4 – Partial Outage One NOAMP & One SOAM Intact**

<p>15. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Set HA on all MP servers</p>	<p>Navigate to <b>Status &amp; Manage</b> → <b>HA</b></p>  <p>Click on <b>Edit</b> at the bottom of the screen</p> <p>For each server whose Max Allowed HA Role is set to Standby, set it to <b>Active</b></p> <p>Press <b>OK</b></p>
<p>16. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Login</p>	<p>Login to the recovered Active NOAMP via SSH terminal as <i>admusr</i> user.</p>
<p>17. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Perform key exchange between the active-NOAMP and recovered servers.</p>	<p>Establish an SSH session to the Active NOAMP, login as <i>admusr</i>.</p> <p>Execute the following command to perform a keyexchange from the active NOAMP to each recovered server:</p> <pre style="border: 1px solid black; padding: 5px; width: fit-content;">\$ keyexchange admusr@&lt;Recovered Server Hostname&gt;</pre>
<p>18. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Establish SSH</p>	<p>Establish an SSH session to the active NOAMP, login as <i>admusr</i>.</p>

**Procedure 4: Recovery Scenario 4 – Partial Outage One NOAMP & One SOAM Intact**

19. **Active NOAMP:**  
 Fetch and Store the database Report for the Newly Restored Data and Save it

Navigate to **Main Menu** → **Status & Manage** → **Database**



Select the **active** NOAMP server and click on the **Report** button at the bottom of the page. The following screen is displayed:

**Main Menu: Status & Manage -> Database [Report]** Help

Tue Oct 05 15:13:38 2010 UTC

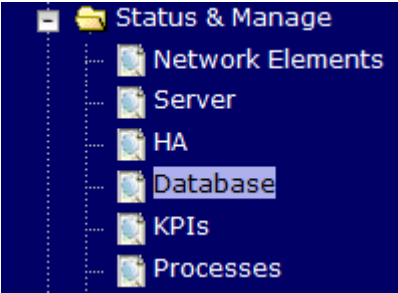
```

=====
NPQR Database Status Report
=====
Report Generated: Tue Oct 05 15:13:38 2010 UTC
From: Active Network OAM&P on host blade07
Report Version: 3.0.13-3.0.0_10.13.0
User: guiadmin
=====
General
-----
Hostname           : blade07
Appworks Database Version : 3.0
Application Database Version :
-----
Capacities and Utilization
-----
Disk Utilization   0.6%: 249M used of 40G total, 38G available
Memory Utilization 0.6%: 136M used of 23975M total, 23839M available
-----
Alarms
-----
None
-----
Maintenance in Progress
-----
Restore operation success
-----
Service Information
-----
Part: A_NpqrProvPart
-----
Table Name      Row Size  Num  Memory  Disk
Schema Avg Max  Rows  Used / Alloc  Used / Alloc
-----
CgPa            44         1  44 B   44 B   44 B   44 B
CgPaGta        52         0   0 B   0 B   0 B   0 B
CgPaInfo       64         1  64 B   64 B   64 B   64 B
CgPaOpc        36         0   0 B   0 B   0 B   0 B
CountryCode    24        306 7344 B 7344 B 7344 B 7344 B
GTConfig       52         2 104 B  104 B  104 B  104 B
MccMnc         40         0   0 B   0 B   0 B   0 B
Msisdn         52         0   0 B   0 B   0 B   0 B
Msm            68         0   0 B   0 B   0 B   0 B
NpqrNeOptions  276        0   0 B   0 B   0 B   0 B
=====
    
```

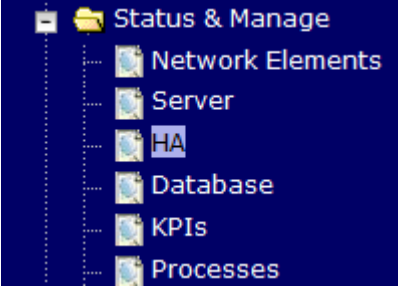
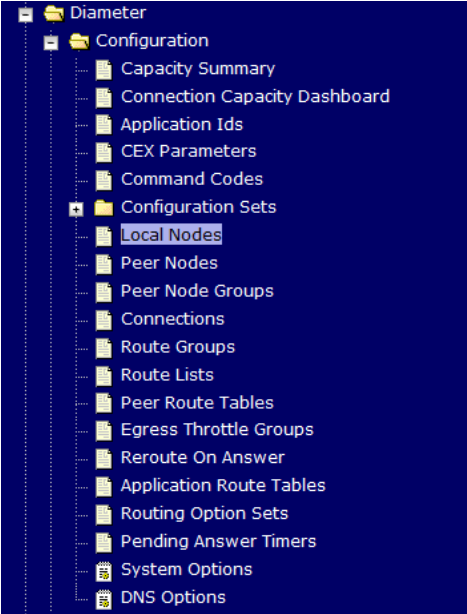
Print Save

Click on **Save** and save the report to your local machine.

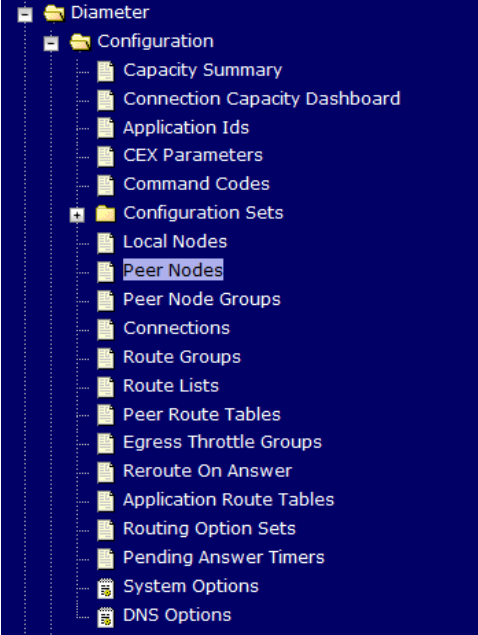
**Procedure 4: Recovery Scenario 4 – Partial Outage One NOAMP & One SOAM Intact**

<p>20.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b></p> <p>Verify Replication Between Servers.</p>	<p>Login to the Active NOAMP via SSH terminal as <i>admusr</i> user.</p> <p>Execute the following command:</p> <pre style="border: 1px solid black; padding: 10px;">\$ sudo irepstat -m</pre> <p>Output like below shall be generated:</p> <pre style="border: 1px solid black; padding: 10px;">-- Policy 0 ActStb [DbReplication] ----- ----- RDU06-MP1 -- Stby   BC From RDU06-SO1 Active      0   0.50 ^0.17%cpu 42B/s  A=none   CC From RDU06-MP2 Active      0   0.10 ^0.17 0.88%cpu 32B/s  A=none RDU06-MP2 -- Active   BC From RDU06-SO1 Active      0   0.50 ^0.10%cpu 33B/s  A=none   CC To  RDU06-MP1 Active      0   0.10  0.08%cpu 20B/s  A=none RDU06-NO1 -- Active   AB To  RDU06-SO1 Active      0   0.50 1%R 0.03%cpu 21B/s RDU06-SO1 -- Active   AB From RDU06-NO1 Active      0   0.50 ^0.04%cpu 24B/s   BC To  RDU06-MP1 Active      0   0.50 1%R 0.04%cpu 21B/s   BC To  RDU06-MP2 Active      0   0.50 1%R 0.07%cpu 21B/s</pre>																																																																																								
<p>21.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b></p> <p>Verify the Database states</p>	<p>Click on <b>Main Menu</b> → <b>Status and Manager</b> → <b>Database</b></p>  <p>Verify that the “OAM Max HA Role” is either “Active” or “Standby” for NOAMP and SOAM and “Application Max HA Role” for MPs is “Active”, and that the status is “Normal” as shown below:</p> <table border="1" data-bbox="467 1646 1412 1852"> <thead> <tr> <th>Network Element</th> <th>Server</th> <th>Role</th> <th>OAM Max HA Role</th> <th>Application Max HA Role</th> <th>Status</th> <th>DB Level</th> <th>OAM Repl Status</th> <th>SIG Repl Status</th> <th>Repl Status</th> <th>Repl Audit Status</th> </tr> </thead> <tbody> <tr> <td>NO_10303</td> <td>NO2</td> <td>Network OAM&amp;P</td> <td>Active</td> <td>OOS</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>NotApplicabl</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>SO_10303</td> <td>PSBR</td> <td>MP</td> <td>Active</td> <td>Active</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>Normal</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>SO_10303</td> <td>MP2</td> <td>MP</td> <td>Active</td> <td>Active</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>Normal</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>SO_10303</td> <td>SO1</td> <td>System OAM</td> <td>Standby</td> <td>OOS</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>NotApplicabl</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>NO_10303</td> <td>NO1</td> <td>Network OAM&amp;P</td> <td>Standby</td> <td>OOS</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>NotApplicabl</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>SO_10303</td> <td>IPFE</td> <td>MP</td> <td>Active</td> <td>OOS</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>Normal</td> <td>Allowed</td> <td>AutoInProg</td> </tr> <tr> <td>SO_10303</td> <td>SO2</td> <td>System OAM</td> <td>Active</td> <td>OOS</td> <td>Normal</td> <td>0</td> <td>Normal</td> <td>NotApplicabl</td> <td>Allowed</td> <td>AutoInProg</td> </tr> </tbody> </table>	Network Element	Server	Role	OAM Max HA Role	Application Max HA Role	Status	DB Level	OAM Repl Status	SIG Repl Status	Repl Status	Repl Audit Status	NO_10303	NO2	Network OAM&P	Active	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg	SO_10303	PSBR	MP	Active	Active	Normal	0	Normal	Normal	Allowed	AutoInProg	SO_10303	MP2	MP	Active	Active	Normal	0	Normal	Normal	Allowed	AutoInProg	SO_10303	SO1	System OAM	Standby	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg	NO_10303	NO1	Network OAM&P	Standby	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg	SO_10303	IPFE	MP	Active	OOS	Normal	0	Normal	Normal	Allowed	AutoInProg	SO_10303	SO2	System OAM	Active	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg
Network Element	Server	Role	OAM Max HA Role	Application Max HA Role	Status	DB Level	OAM Repl Status	SIG Repl Status	Repl Status	Repl Audit Status																																																																																
NO_10303	NO2	Network OAM&P	Active	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg																																																																																
SO_10303	PSBR	MP	Active	Active	Normal	0	Normal	Normal	Allowed	AutoInProg																																																																																
SO_10303	MP2	MP	Active	Active	Normal	0	Normal	Normal	Allowed	AutoInProg																																																																																
SO_10303	SO1	System OAM	Standby	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg																																																																																
NO_10303	NO1	Network OAM&P	Standby	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg																																																																																
SO_10303	IPFE	MP	Active	OOS	Normal	0	Normal	Normal	Allowed	AutoInProg																																																																																
SO_10303	SO2	System OAM	Active	OOS	Normal	0	Normal	NotApplicabl	Allowed	AutoInProg																																																																																

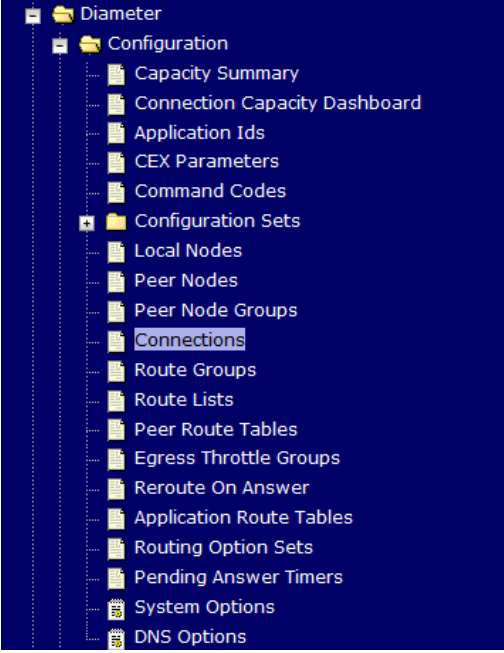
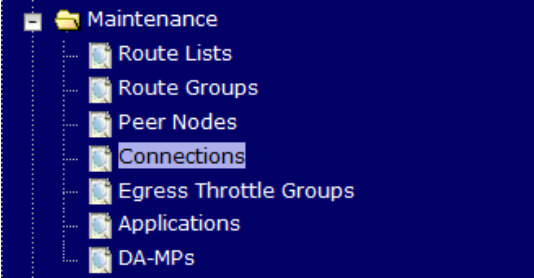

**Procedure 4: Recovery Scenario 4 – Partial Outage One NOAMP & One SOAM Intact**

<p>22. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Verify the HA Status</p>	<p>Click on <b>Main Menu</b> → <b>Status and Manage</b> → <b>HA</b></p>  <p>Select the row for all of the servers</p> <p>Verify that the “HA Role” is either “Active” or “Standby”.</p> <table border="1" data-bbox="467 695 1412 863"> <thead> <tr> <th>Hostname</th> <th>OAM Max HA Role</th> <th>Application Max HA Role</th> <th>Max Allowed HA Role</th> <th>Mate Hostname List</th> <th>Network Element</th> <th>Server Role</th> <th>Active VIPs</th> </tr> </thead> <tbody> <tr> <td>NO2</td> <td>Active</td> <td>OOS</td> <td>Active</td> <td>NO1</td> <td>NO_10303</td> <td>Network OAM&amp;P</td> <td>10.240.70.132</td> </tr> <tr> <td>SO1</td> <td>Standby</td> <td>OOS</td> <td>Active</td> <td>SO2</td> <td>SO_10303</td> <td>System OAM</td> <td></td> </tr> <tr> <td>SO2</td> <td>Active</td> <td>OOS</td> <td>Active</td> <td>SO1</td> <td>SO_10303</td> <td>System OAM</td> <td>10.240.70.133</td> </tr> <tr> <td>MP1</td> <td>Standby</td> <td>Active</td> <td>Active</td> <td>MP2</td> <td>SO_10303</td> <td>MP</td> <td></td> </tr> <tr> <td>MP2</td> <td>Active</td> <td>Active</td> <td>Active</td> <td>MP1</td> <td>SO_10303</td> <td>MP</td> <td></td> </tr> <tr> <td>IPFE</td> <td>Active</td> <td>OOS</td> <td>Active</td> <td></td> <td>SO_10303</td> <td>MP</td> <td></td> </tr> </tbody> </table>	Hostname	OAM Max HA Role	Application Max HA Role	Max Allowed HA Role	Mate Hostname List	Network Element	Server Role	Active VIPs	NO2	Active	OOS	Active	NO1	NO_10303	Network OAM&P	10.240.70.132	SO1	Standby	OOS	Active	SO2	SO_10303	System OAM		SO2	Active	OOS	Active	SO1	SO_10303	System OAM	10.240.70.133	MP1	Standby	Active	Active	MP2	SO_10303	MP		MP2	Active	Active	Active	MP1	SO_10303	MP		IPFE	Active	OOS	Active		SO_10303	MP	
Hostname	OAM Max HA Role	Application Max HA Role	Max Allowed HA Role	Mate Hostname List	Network Element	Server Role	Active VIPs																																																			
NO2	Active	OOS	Active	NO1	NO_10303	Network OAM&P	10.240.70.132																																																			
SO1	Standby	OOS	Active	SO2	SO_10303	System OAM																																																				
SO2	Active	OOS	Active	SO1	SO_10303	System OAM	10.240.70.133																																																			
MP1	Standby	Active	Active	MP2	SO_10303	MP																																																				
MP2	Active	Active	Active	MP1	SO_10303	MP																																																				
IPFE	Active	OOS	Active		SO_10303	MP																																																				
<p>23. <input type="checkbox"/></p>	<p><b>Active SOAM:</b> Verify the Local Node Info</p>	<p>Navigate to <b>Main Menu</b> → <b>Diameter</b> → <b>Configuration</b> → <b>Local Node</b></p>  <p>Verify that all the local nodes are shown.</p>																																																								

**Procedure 4: Recovery Scenario 4 – Partial Outage One NOAMP & One SOAM Intact**

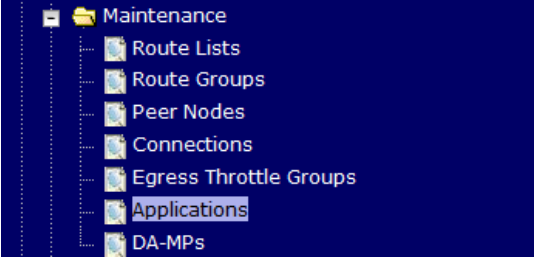


<p>24. <input type="checkbox"/></p>	<p><b>Active SOAM:</b> Verify the Peer Node Info</p>	<p>Navigate to <b>Main Menu</b> → <b>Diameter</b> → <b>Configuration</b> → <b>Peer Node</b></p>  <p>Verify that all the peer nodes are shown.</p>
-------------------------------------	--	--

**Procedure 4: Recovery Scenario 4 – Partial Outage One NOAMP & One SOAM Intact**

<p>25. <input type="checkbox"/></p>	<p><b>Active SOAM:</b> Verify the Connections Info</p>	<p>Navigate to <b>Main Menu</b> → <b>Diameter</b> → <b>Configuration</b> → <b>Connections</b></p>  <p>Verify that all the connections are shown.</p>
<p>26. <input type="checkbox"/></p>	<p><b>Active SOAM:</b> Enable Connections if needed</p>	<p>Navigate to <b>Main Menu</b> → <b>Diameter</b> → <b>Maintenance</b> → <b>Connections</b></p>  <p>Select each connection and click on the <b>Enable</b> button. Alternatively you can enable all the connections by selecting the <b>EnableAll</b> button.</p>  <p>Verify that the Operational State is Available.</p>



**Procedure 4: Recovery Scenario 4 – Partial Outage One NOAMP & One SOAM Intact**

<p>27. <input type="checkbox"/></p>	<p><b>Active SOAM:</b> Enable Optional Features</p>	<p>Navigate to <b>Main Menu</b> → <b>Diameter</b> → <b>Maintenance</b> → <b>Applications</b></p>  <p>Select the SPR feature applications. Click the <b>Enable</b> button.</p> <p><input type="button" value="Enable"/> <input type="button" value="Disable"/> <input type="checkbox"/> Pause updates</p>
<p>28. <input type="checkbox"/></p>	<p><b>Active SOAM:</b> Examine All Alarms</p>	<p>Navigate to <b>Main Menu</b> → <b>Alarms &amp; Events</b> → <b>View Active</b></p>  <p>Examine all active alarms and refer to the on-line help on how to address them. If needed contact My Oracle Support (MOS).</p>
<p>29. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Examine All Alarms</p>	<p>Login to the NOAMP VIP if not already logged in.</p> <p>Navigate to <b>Main Menu</b> → <b>Alarms &amp; Events</b> → <b>View Active</b></p>  <p>Examine all active alarms and refer to the on-line help on how to address them. If needed contact My Oracle Support (MOS).</p>

**Procedure 4: Recovery Scenario 4 – Partial Outage One NOAMP & One SOAM Intact**

<p>30. <input type="checkbox"/></p>	<p><b>Restart oampAgent if Needed</b></p>	<p>Note: If alarm “10012: The responder for a monitored table failed to respond to a table change” is raised, the oampAgent needs to be restarted.</p> <p>Establish an SSH session to each server that has the alarm.</p> <p>Login as <i>admusr</i></p> <p>Execute the following commands:</p> <pre style="border: 1px solid black; padding: 5px;">\$ sudo pm.set off oampAgent \$ sudo pm.set on oampAgent</pre>
<p>31. <input type="checkbox"/></p>	<p><b>Backup and Archive All the Databases from the Recovered System</b></p>	<p>Execute <b>Appendix A Oracle Communications User Data Repository Database Backup</b> to back up the Configuration databases.</p>
<p><b>THIS PROCEDURE HAS BEEN COMPLETED</b></p>		

### 4.1.5 Recovery Scenario 5 (Database Recovery)

The following sections deal with recovering from database corruption, whether a backup is present or not.

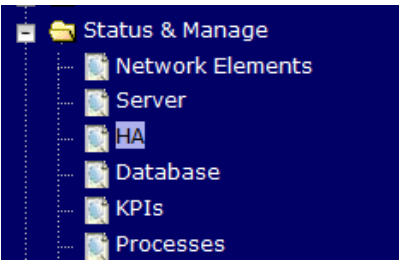

#### 4.1.5.1 Recovery Scenario 5: Case 1

For a partial outage with

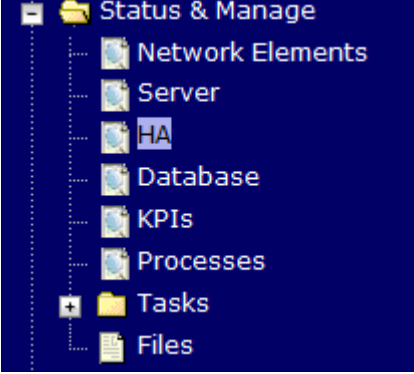
- Server having a corrupted database
- Replication channel from parent is inhibited because of upgrade activity or
- Server is in a different release then that of its Active parent because of upgrade activity.
- Verify that the Server Runtime backup files, performed at the start of the upgrade, are present in /var/TKLCL/db/filemgmt area in the following format
  - Backup.UDR.HPC02-NO2.FullIDBParts.NETWORK\_OAMP.20140524\_223507.UPG.tar.bz2
  - Backup.UDR.HPC02-NO2.FullRunEnv.NETWORK\_OAMP.20140524\_223507.UPG.tar.bz2

**Note:** During recovery, the corrupted Database will get replaced by the sever Runtime backup. Any configuration done after taking the backup will not be visible post recovery.

**Procedure 5: Recovery Scenario 5 (Case 1) – Database Recovery Backup Present**

<b>S T E P #</b>	This procedure performs recovery if database is corrupted in the system Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number. If this procedure fails, contact <b>My Oracle Support (MOS)</b> , and ask for assistance.	
1. <input type="checkbox"/>	<b>Active NOAMP:</b> Set Failed Servers to Standby	Navigate to <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>HA</b>  Select <b>Edit</b> Set the Max Allowed HA Role drop down box to <b>Standby</b> for the failed servers. Select <b>Ok</b> 
2. <input type="checkbox"/>	<b>Server with DB Corruption:</b> Login	Establish an SSH session to the server in question. Login as <i>admusr</i> user.
3. <input type="checkbox"/>	<b>Server with DB Corruption:</b> Change runlevel to 3	Execute the following command to bring the system to runlevel 3. <pre style="border: 1px solid black; padding: 5px; width: fit-content;">\$ sudo init 3</pre>

**Procedure 5: Recovery Scenario 5 (Case 1) – Database Recovery Backup Present**

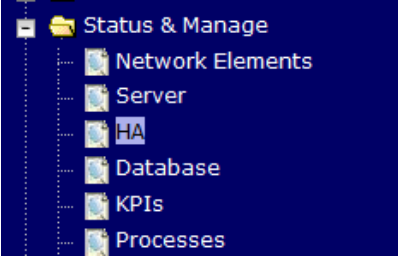

<p>4. <input type="checkbox"/></p>	<p><b>Server with DB Corruption:</b> Recover System</p>	<p>Execute the following command and follow the instructions appearing the console prompt</p> <pre style="border: 1px solid black; padding: 5px;">\$ sudo /usr/TKLC/appworks/sbin/backout_restore</pre>
<p>5. <input type="checkbox"/></p>	<p><b>Server with DB Corruption:</b> Change runlevel to 4</p>	<p>Execute the following command to bring the system back to runlevel 4.</p> <pre style="border: 1px solid black; padding: 5px;">\$ sudo init 4</pre>
<p>6. <input type="checkbox"/></p>	<p><b>Server with DB Corruption:</b> Verify the server</p>	<p>Execute the following command to verify if the processes are up and running</p> <pre style="border: 1px solid black; padding: 5px;">\$ sudo pm.getprocs</pre>
<p>7. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Set Failed Servers to Active</p>	<p>Navigate to <b>Status &amp; Manage</b> → <b>HA</b></p>  <p>Click on <b>Edit</b> at the bottom of the screen</p> <p>For each failed server whose Max Allowed HA Role is set to Standby, set it to <b>Active</b></p> <p>Press <b>OK</b></p>
<p>8. <input type="checkbox"/></p>	<p><b>Backup and Archive All the Databases from the Recovered System</b></p>	<p>Execute <b>Appendix A Oracle Communications User Data Repository Database Backup</b> to back up the Configuration databases:</p>
<p><b>THIS PROCEDURE HAS BEEN COMPLETED</b></p>		

4.1.5.2 Recovery Scenario 5: Case 2


For a partial outage with

- Server having a corrupted database
- Replication channel is available or
- Server has the same release as that of its Active parent

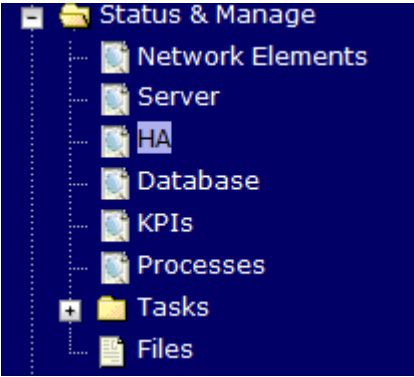
**Procedure 6: Recovery Scenario 5 (Case 2) – Database Recovery Backup Not Present**

<p><b>S</b> <b>T</b> <b>E</b> <b>P</b> <b>#</b></p>	<p>This procedure performs recovery if database got corrupted in the system and system is in the state to get replicated</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>If this procedure fails, contact <b>My Oracle Support (MOS)</b>, and ask for assistance.</p>	
<p>1. <input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Set Failed Servers to Standby</p>	<p>Navigate to <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>HA</b></p>  <p>Select <b>Edit</b></p> <p>Set the Max Allowed HA Role drop down box to <b>Standby</b> for the failed servers.</p> <p>Select <b>Ok</b></p> 
<p>2. <input type="checkbox"/></p>	<p><b>Server with DB Corruption:</b> Login</p>	<p>Establish an SSH session to the server in question. Login as <i>admusr</i> user.</p>
<p>3. <input type="checkbox"/></p>	<p><b>Server with DB Corruption:</b> Take Server out of Service</p>	<p>Execute the following command to take the server out of service.</p> <pre style="border: 1px solid black; padding: 5px;">\$ sudo bash -l \$ sudo prod.clobber</pre>
<p>4. <input type="checkbox"/></p>	<p><b>Server with DB Corruption:</b> Take Server to DbUp State and Start the Application</p>	<p>Execute the following commands to take the server to Dbup and start the Oracle Communications User Data Repository application:</p> <pre style="border: 1px solid black; padding: 5px;">\$ sudo bash -l \$ sudo prod.start</pre>

**Procedure 6: Recovery Scenario 5 (Case 2) – Database Recovery Backup Not Present**

<p>5.</p> <p><input type="checkbox"/></p>	<p><b>Server with DB Corruption:</b></p> <p>Verify the Server State</p>	<p>Execute the following commands to verify the processes are up and running:</p> <pre style="border: 1px solid black; padding: 5px;">\$ sudo pm.getprocs</pre> <p>Execute the following command to verify if replication channels are up and running:</p> <pre style="border: 1px solid black; padding: 5px;">\$ sudo irepstat</pre> <p>Execute the following command to verify if merging channels are up and running:</p> <pre style="border: 1px solid black; padding: 5px;">\$ sudo inetmstat</pre>
<p>6.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b></p> <p>Restart UDR application</p>	<p>Navigate to <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Server</b></p>  <p>Select each recovered server and click on <b>Restart</b>.</p> <div style="display: flex; justify-content: center; gap: 10px;"> <span style="border: 1px solid gray; padding: 2px 10px;">Stop</span> <span style="border: 1px solid gray; padding: 2px 10px;">Restart</span> <span style="border: 1px solid gray; padding: 2px 10px;">Reboot</span> <span style="border: 1px solid gray; padding: 2px 10px;">NTP Sync</span> <span style="border: 1px solid gray; padding: 2px 10px;">Report</span> </div>

**Procedure 6: Recovery Scenario 5 (Case 2) – Database Recovery Backup Not Present**

<p>7.</p> <p><input type="checkbox"/></p>	<p><b>Active NOAMP:</b> Set Failed Servers to Active</p>	<p>Navigate to <b>Status &amp; Manage</b> → <b>HA</b></p>  <p>Click on <b>Edit</b> at the bottom of the screen</p> <p>For each failed server whose Max Allowed HA Role is set to Standby, set it to <b>Active</b></p> <p>Press <b>OK</b></p>
<p>8.</p> <p><input type="checkbox"/></p>	<p><b>Backup and Archive All the Databases from the Recovered System</b></p>	<p>Execute <b>Appendix A Oracle Communications User Data Repository Database Backup</b> to back up the Configuration databases:</p>
<p><b>THIS PROCEDURE HAS BEEN COMPLETED</b></p>		


## 5 RESOLVING USER CREDENTIAL ISSUES AFTER DATABASE RESTORE

User incompatibilities may introduce security holes or prevent access to the network by administrators. User incompatibilities are not dangerous to the database, however. Review each user difference carefully to ensure that the restoration will not impact security or accessibility.

### 5.1 Keeping a Restored User (Resetting User Password)

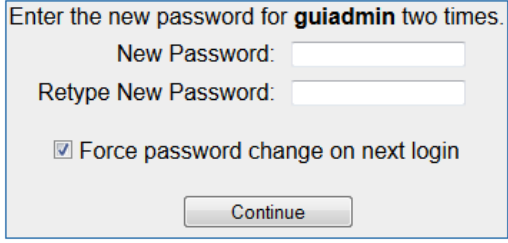
User accounts kept across a restore operation should have their passwords reset. This procedure guides you through that process.

#### Procedure 7: Keep Restored User (Resetting User Password)

<p><b>S T E P #</b></p>	<p>Perform this procedure to keep users that will be restored by system restoration.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>If this procedure fails, contact <b>My Oracle Support (MOS)</b>, and ask for assistance.</p>	
<p>1.</p> <p><input type="checkbox"/></p>	<p><b>Before Restoration:</b> Notify Affected Users <i>(Before Restoration)</i></p>	<p>Contact each user that is affected <b><u>before the restoration</u></b> and notify them that you will reset their password during this maintenance operation.</p>
<p>2.</p> <p><input type="checkbox"/></p>	<p><b>After Restoration:</b> Login to the Active NOAMP  <i>(Before Restoration)</i></p>	<p>Establish a GUI session on the NOAMP server by using the VIP IP address of the NOAMP server. Open the web browser and enter a URL of:</p> <div style="border: 1px solid black; padding: 5px; margin: 10px 0;"> <p><code>http://&lt;Primary_NOAMP_VIP_IP_Address&gt;</code></p> </div> <p>Login as the <b>guiadmin</b> user:</p> 




**Procedure 7: Keep Restored User (Resetting User Password)**

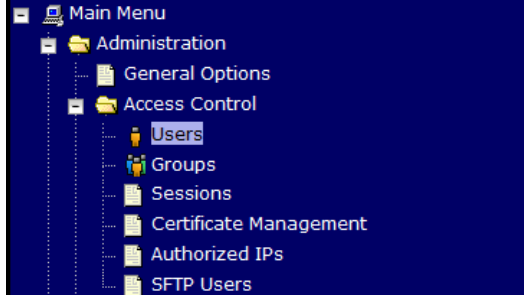
<p>3. <input type="checkbox"/></p>	<p><b>After Restoration:</b> Reset User Passwords</p>	<p>Navigate to <b>Administration</b> → <b>Access Control</b> → <b>Users</b></p>  <p>Select the user</p> <p>Click the <b>Change Password</b> button</p>  <p>Enter a new password</p>  <p>Click the <b>Continue</b> button</p>
<p style="text-align: center;"><b>THIS PROCEDURE HAS BEEN COMPLETED</b></p>		

## 5.2 Removing a Restored User

### Procedure 8: Remove the Restored User

<b>S T E P #</b>	Perform this procedure to remove users that will be restored by system restoration Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number. If this procedure fails, contact <b>My Oracle Support (MOS)</b> , and ask for assistance.	
1. <input type="checkbox"/>	<b>After Restoration:</b> Login to the Active NOAMP	Establish a GUI session on the NOAMP server by using the VIP IP address of the NOAMP server. Open the web browser and enter a URL of: <div style="border: 1px solid black; padding: 5px; margin: 10px 0;">                     http://&lt;Primary_NOAMP_VIP_IP_Address&gt;                 </div> Login as the <i>guiadmin</i> user: <div style="text-align: center; margin: 20px 0;">  </div>

**Procedure 8: Remove the Restored User**

2. <input type="checkbox"/>	<b>After Restoration:</b> Delete User	Navigate to <b>Administration</b> → <b>Access Control</b> → <b>Users</b>
		
Select the user Click the <b>Delete</b> button		
<input type="button" value="Insert"/> <input type="button" value="Edit"/> <input type="button" value="Delete"/> <input type="button" value="Report"/> <input type="button" value="Change Password"/>		
Delete selected users?		
<input type="button" value="OK"/> <input type="button" value="Cancel"/>		
Click the <b>OK</b> button to confirm.		
<b>THIS PROCEDURE HAS BEEN COMPLETED</b>		

**5.3 Restoring a Modified User**

These users have had a password change prior to creation of the backup and archive file. The will be reverted by system restoration of that file.

- The password for user 'testuser' differs between the selected backup file and the current database.

**Before Restoration:**

Verify that you have access to a user with administrator permissions that is not affected.

Contact each user that is affected and notify them that you will reset their password during this maintenance operation.

**After Restoration:**


Log in and reset the passwords for all users in this category. See the steps in Section 5.1 (Keeping a Restored User) for resetting passwords for a user.

## 5.4 Restoring an Archive that does not contain a Current User

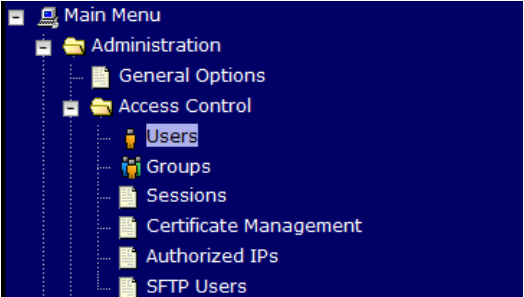

These users have been created after the backup operation. They will be deleted by system restoration of that file.

If the user is no longer desired, do not perform any additional steps. The user is permanently removed.

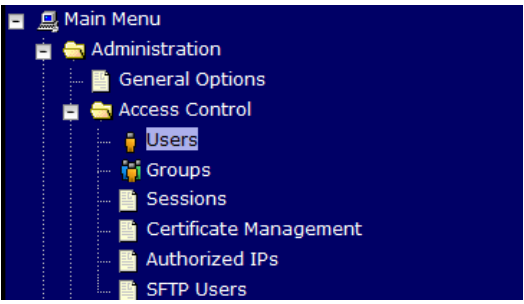

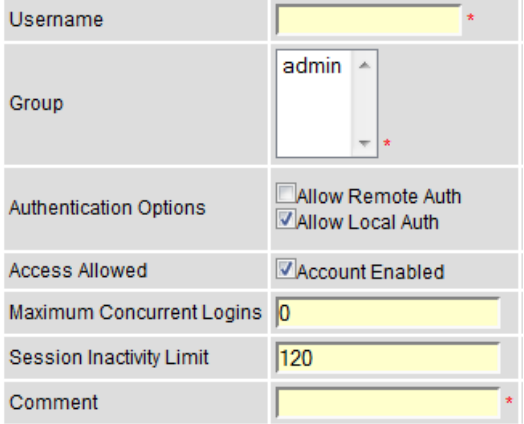

### Procedure 9: Restoring an Archive that does not Contain a Current User

<b>S T E P #</b>	<p>Perform this procedure to remove users that will be restored by system restoration</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>If this procedure fails, contact <b>My Oracle Support (MOS)</b>, and ask for assistance.</p>	
1. <input type="checkbox"/>	<p><b>Before Restoration:</b> Notify Affected Users <i>(Before Restoration)</i></p>	<p>Contact each user that is affected <b>before the restoration</b> and notify them that you will reset their password during this maintenance operation.</p>
2. <input type="checkbox"/>	<p><b>Before Restoration:</b> Login to the Active NOAMP  <i>(Before Restoration)</i></p>	<p>Establish a GUI session on the NOAMP server by using the VIP IP address of the NOAMP server. Open the web browser and enter a URL of:</p> <div style="border: 1px solid black; padding: 5px; margin: 10px 0;"> <p><b>http://&lt;Primary_NOAMP_VIP_IP_Address&gt;</b></p> </div> <p>Login as the <b>guiadmin</b> user:</p> 

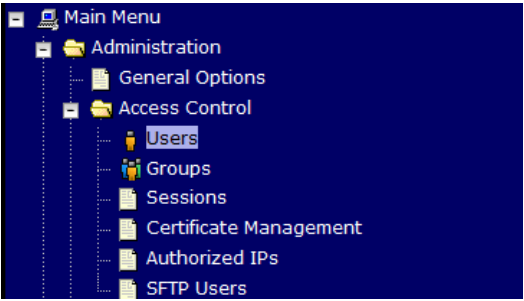

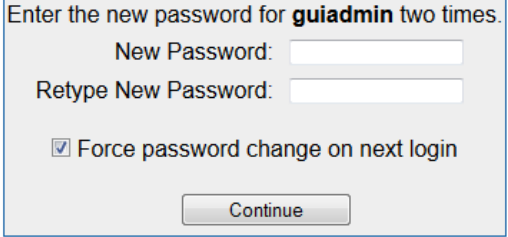
**Procedure 9: Restoring an Archive that does not Contain a Current User**

<p>3.</p> <p><input type="checkbox"/></p>	<p><b>Before Restoration:</b> Record user settings</p> <p>(Before Restoration)</p>	<p>Navigate to <b>Administration</b> → <b>Access Control</b> → <b>Users</b></p>  <p>Under each affected user, record the following:</p> <ul style="list-style-type: none"> <li>• Username,</li> <li>• Account status</li> <li>• Remote Auth</li> <li>• Local Auth</li> <li>• Concurrent Logins Allowed</li> <li>• Inactivity Limit</li> <li>• Comment</li> <li>• Groups</li> </ul>
<p>4.</p> <p><input type="checkbox"/></p>	<p><b>After Restoration:</b> Login</p>	<p>Establish a GUI session on the NOAMP server by using the VIP IP address of the NOAMP server. Open the web browser and enter a URL of:</p> <div style="border: 1px solid black; padding: 5px; margin: 10px 0;"> <p><code>http://&lt;Primary_NOAMP_VIP_IP_Address&gt;</code></p> </div> <p>Login as the <i>guiadmin</i> user:</p>  <p>Welcome to the Oracle System Login.</p> <p><small>Unauthorized access is prohibited. This Oracle system requires the use of Microsoft Internet Explorer 8.0, 9.0, or 10.0 with support for JavaScript and cookies.</small></p> <p><small>Oracle and Java are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.</small></p>

**Procedure 9: Restoring an Archive that does not Contain a Current User**


<p>5. <input type="checkbox"/></p>	<p><b>After Restoration:</b> Recreate affected user</p>	<p>Navigate to <b>Administration</b> → <b>Access Control</b> → <b>Users</b></p>  <p>Click <b>Insert</b></p>  <p>Recreate the user using the data collected in <b>Step 3</b>.</p>  <p>Click <b>Ok</b></p> 
<p>6. <input type="checkbox"/></p>	<p><b>After Restoration:</b> Repeat for Additional Users</p>	<p>Repeat <b>Step 5</b> to recreate additional users.</p>

**Procedure 9: Restoring an Archive that does not Contain a Current User**

<p>7. <b>After Restoration:</b> Reset the Passwords</p>	<p>Navigate to <b>Administration</b> → <b>Access Control</b> → <b>Users</b></p>  <p>Select the user</p> <p>Click the <b>Change Password</b> button</p>  <p>Enter a new password</p>  <p>Click the <b>Continue</b> button</p>
<p style="text-align: center;"><b>THIS PROCEDURE HAS BEEN COMPLETED</b></p>	

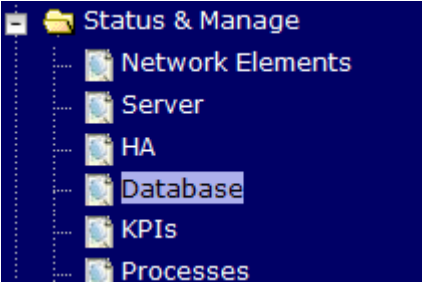

## Appendix A. Oracle Communications User Data Repository Database Backup

### Procedure 12: Restoring an Archive that does not Contain a Current User

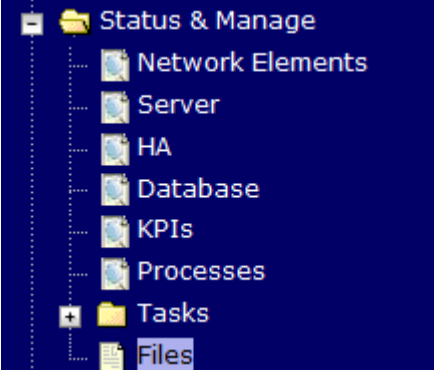
<p><b>S</b> <b>T</b> <b>E</b> <b>P</b> <b>#</b></p>	<p>The intent of this procedure is to back up the provision and configuration information from an NOAMP or SOAM server after the disaster recovery is complete</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>If this procedure fails, contact <b>My Oracle Support (MOS)</b>, and ask for assistance.</p>	
<p>1. <input type="checkbox"/></p>	<p><b>Active NOAMP/SOAM: Login</b></p>	<p>Establish a GUI session on the Active NOAMP or SOAM server by using the VIP IP address of the NOAMP or SOAM server.</p> <p>Open the web browser and enter a URL of:</p> <div style="border: 1px solid black; padding: 5px; margin: 10px 0;"> <p><code>http://&lt;Primary_NOAMP/SOAM_VIP_IP_Address&gt;</code></p> </div> <p>Login as the <i>guiadmin</i> user:</p> 




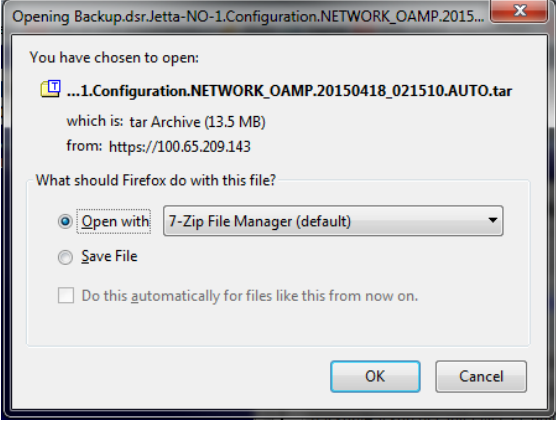
**Procedure 12: Restoring an Archive that does not Contain a Current User**

2.	<p><b>Active NOAMP/SOAM:</b> Backup Configuration Data for the System</p>	<p>Navigate to <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Database</b></p>  <p>Select the Active NOAMP Server and Click on <b>Backup</b> button</p>  <p>Make sure that the checkboxes next to “Configuration” is checked.</p> <p><b>Database Backup</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Field</th> <th style="text-align: left;">Value</th> </tr> </thead> <tbody> <tr> <td colspan="2">Server: Jetta-NO-1</td> </tr> <tr> <td>Select data for backup</td> <td> <input type="checkbox"/> Provisioning  <input checked="" type="checkbox"/> Configuration                 </td> </tr> <tr> <td>Compression</td> <td> <input type="radio"/> gzip  <input checked="" type="radio"/> bzip2  <input type="radio"/> none *                 </td> </tr> <tr> <td>Archive Name</td> <td>Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP.20150428_09311: *</td> </tr> <tr> <td>Comment</td> <td><input style="width: 100%;" type="text"/></td> </tr> </tbody> </table> <p style="text-align: right;"><input type="button" value="Ok"/> <input type="button" value="Cancel"/></p> <p>Enter a filename for the backup and press <b>OK</b></p>	Field	Value	Server: Jetta-NO-1		Select data for backup	<input type="checkbox"/> Provisioning <input checked="" type="checkbox"/> Configuration	Compression	<input type="radio"/> gzip <input checked="" type="radio"/> bzip2 <input type="radio"/> none *	Archive Name	Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP.20150428_09311: *	Comment	<input style="width: 100%;" type="text"/>
Field	Value													
Server: Jetta-NO-1														
Select data for backup	<input type="checkbox"/> Provisioning <input checked="" type="checkbox"/> Configuration													
Compression	<input type="radio"/> gzip <input checked="" type="radio"/> bzip2 <input type="radio"/> none *													
Archive Name	Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP.20150428_09311: *													
Comment	<input style="width: 100%;" type="text"/>													

**Procedure 12: Restoring an Archive that does not Contain a Current User**

<p>3. <input type="checkbox"/></p>	<p><b>Active NOAMP/SOAM:</b> Verify the backup file existence.</p>	<p>Navigate to <b>Main Menu</b> → <b>Status &amp; Manage</b> → <b>Files</b></p>  <p><b>Main Menu: Status &amp; Manage -&gt; Files</b></p> <p>Filter Tasks</p> <p>Jetta-NO-1 Jetta-NO-2 Jetta-SO-1 Jetta-SO-2 Jetta-DAMP-1 Jetta-DAMP-2</p> <table border="1"> <thead> <tr> <th>File Name</th> </tr> </thead> <tbody> <tr><td>Backup.DSR.Jetta-NO-1.FullIDBParts.NETWORK_OAMP20150421_143846.UPG.tar.bz2</td></tr> <tr><td>Backup.DSR.Jetta-NO-1.FullRunEnv.NETWORK_OAMP20150421_143846.UPG.tar.bz2</td></tr> <tr><td>backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150414_021511.AUTO.tar</td></tr> <tr><td>backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150415_021510.AUTO.tar</td></tr> <tr><td>backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150416_021511.AUTO.tar</td></tr> <tr><td>backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150417_021510.AUTO.tar</td></tr> <tr><td>backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150418_021510.AUTO.tar</td></tr> <tr><td>backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150419_021510.AUTO.tar</td></tr> <tr><td>backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150420_021510.AUTO.tar</td></tr> <tr><td>backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150421_021511.AUTO.tar</td></tr> <tr><td>backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150422_021511.AUTO.tar</td></tr> <tr><td>backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150423_021510.AUTO.tar</td></tr> <tr><td>backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150424_021511.AUTO.tar</td></tr> <tr><td>backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150425_021510.AUTO.tar</td></tr> <tr><td>backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150426_021510.AUTO.tar</td></tr> <tr><td>backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150427_021511.AUTO.tar</td></tr> <tr><td>backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150428_021511.AUTO.tar</td></tr> </tbody> </table> <p>Select the Active NOAMP or SOAM tab. The files on this server will be displayed. Verify the existence of the backup file.</p>	File Name	Backup.DSR.Jetta-NO-1.FullIDBParts.NETWORK_OAMP20150421_143846.UPG.tar.bz2	Backup.DSR.Jetta-NO-1.FullRunEnv.NETWORK_OAMP20150421_143846.UPG.tar.bz2	backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150414_021511.AUTO.tar	backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150415_021510.AUTO.tar	backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150416_021511.AUTO.tar	backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150417_021510.AUTO.tar	backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150418_021510.AUTO.tar	backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150419_021510.AUTO.tar	backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150420_021510.AUTO.tar	backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150421_021511.AUTO.tar	backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150422_021511.AUTO.tar	backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150423_021510.AUTO.tar	backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150424_021511.AUTO.tar	backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150425_021510.AUTO.tar	backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150426_021510.AUTO.tar	backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150427_021511.AUTO.tar	backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150428_021511.AUTO.tar
File Name																				
Backup.DSR.Jetta-NO-1.FullIDBParts.NETWORK_OAMP20150421_143846.UPG.tar.bz2																				
Backup.DSR.Jetta-NO-1.FullRunEnv.NETWORK_OAMP20150421_143846.UPG.tar.bz2																				
backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150414_021511.AUTO.tar																				
backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150415_021510.AUTO.tar																				
backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150416_021511.AUTO.tar																				
backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150417_021510.AUTO.tar																				
backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150418_021510.AUTO.tar																				
backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150419_021510.AUTO.tar																				
backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150420_021510.AUTO.tar																				
backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150421_021511.AUTO.tar																				
backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150422_021511.AUTO.tar																				
backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150423_021510.AUTO.tar																				
backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150424_021511.AUTO.tar																				
backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150425_021510.AUTO.tar																				
backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150426_021510.AUTO.tar																				
backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150427_021511.AUTO.tar																				
backup/Backup.dsr.Jetta-NO-1.Configuration.NETWORK_OAMP20150428_021511.AUTO.tar																				

**Procedure 12: Restoring an Archive that does not Contain a Current User**

<p>4. <input type="checkbox"/></p>	<p><b>Active NOAMP/SOAM:</b> Download the file to a local machine.</p>	<p>From the previous step, choose the backup file.</p> <p>Select the <b>Download</b> button</p>  <p>Select <b>OK</b> to confirm the download.</p> 
<p>5. <input type="checkbox"/></p>	<p><b>Upload the Image to Secure Location</b></p>	<p>Transfer the backed up image saved in the previous step to a secure location where the Server Backup files are fetched in case of system disaster recovery.</p>
<p>6. <input type="checkbox"/></p>	<p><b>Backup Active SOAM</b></p>	<p>Repeat <b>Steps 2 through 5</b> to back up the Active SOAM.</p>
<p><b>THIS PROCEDURE HAS BEEN COMPLETED</b></p>		

## Appendix B. Inhibit A and B Level Replication on C-Level Servers

### Procedure 13: Inhibit A and B Level Replication on C-Level Servers

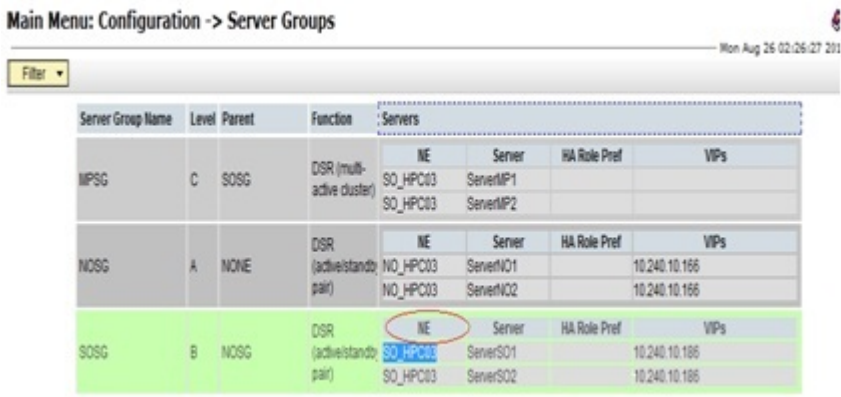
<b>S T E P #</b>	<p>The intent of this procedure is to inhibit A and B level replication on all C Level servers of this site</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>If this procedure fails, contact <b>My Oracle Support (MOS)</b>, and ask for assistance.</p>																																																					
1. <input type="checkbox"/>	<b>Active NOAMP:</b> Login	<p>Login to the Active NOAMP server via SSH as <i>admusr</i> user.</p>																																																				
2. <input type="checkbox"/>	<b>Active NOAMP:</b> Inhibit replication on all MP servers	<p>Execute the following command:</p> <div style="border: 1px solid black; padding: 5px; margin: 10px 0;"> <pre>\$ for i in \$(iqt -p -z -h -fhostName NodeInfo where "nodeId like 'C*' and siteId='&lt;NE name of the site&gt;'); do iset -finhibitRepPlans='A B' NodeInfo where "nodeName='\$i'; done</pre> </div> <p><b>Note:</b> NE name of the site can be found out by logging into the Active NOAMP GUI and going to <b>Configuration</b> → <b>Server Groups</b> screen.</p> <p>Please see the snapshot below for more details. E.g. if ServerSO1 belong to the site which is being recovered then siteId will be SO_HPC03.</p> <div style="border: 1px solid gray; padding: 5px; margin: 10px 0;"> <p>Main Menu: Configuration -&gt; Server Groups <span style="float: right;">Mon Aug 26 02:26:27 2011</span></p> <p>Filter ▾</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Server Group Name</th> <th>Level</th> <th>Parent</th> <th>Function</th> <th colspan="4">Servers</th> </tr> </thead> <tbody> <tr> <td rowspan="2">MPSG</td> <td rowspan="2">C</td> <td rowspan="2">SOSG</td> <td rowspan="2">DSR (multi-active cluster)</td> <td>NE</td> <td>Server</td> <td>HA Role</td> <td>Prefs</td> </tr> <tr> <td>SO_HPC03</td> <td>ServerMP1</td> <td></td> <td></td> </tr> <tr> <td rowspan="2">NOSG</td> <td rowspan="2">A</td> <td rowspan="2">NONE</td> <td rowspan="2">DSR (active/standby pair)</td> <td>NO_HPC03</td> <td>ServerNO1</td> <td></td> <td>10.240.10.186</td> </tr> <tr> <td>NO_HPC03</td> <td>ServerNO2</td> <td></td> <td>10.240.10.186</td> </tr> <tr> <td rowspan="2">SOSG</td> <td rowspan="2">B</td> <td rowspan="2">NOSG</td> <td rowspan="2">DSR (active/standby pair)</td> <td>NE</td> <td>Server</td> <td>HA Role</td> <td>Prefs</td> </tr> <tr> <td>SO_HPC03</td> <td>ServerSO1</td> <td></td> <td>10.240.10.186</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>SO_HPC03</td> <td>ServerSO2</td> <td></td> <td>10.240.10.186</td> </tr> </tbody> </table> </div>	Server Group Name	Level	Parent	Function	Servers				MPSG	C	SOSG	DSR (multi-active cluster)	NE	Server	HA Role	Prefs	SO_HPC03	ServerMP1			NOSG	A	NONE	DSR (active/standby pair)	NO_HPC03	ServerNO1		10.240.10.186	NO_HPC03	ServerNO2		10.240.10.186	SOSG	B	NOSG	DSR (active/standby pair)	NE	Server	HA Role	Prefs	SO_HPC03	ServerSO1		10.240.10.186					SO_HPC03	ServerSO2		10.240.10.186
Server Group Name	Level	Parent	Function	Servers																																																		
MPSG	C	SOSG	DSR (multi-active cluster)	NE	Server	HA Role	Prefs																																															
				SO_HPC03	ServerMP1																																																	
NOSG	A	NONE	DSR (active/standby pair)	NO_HPC03	ServerNO1		10.240.10.186																																															
				NO_HPC03	ServerNO2		10.240.10.186																																															
SOSG	B	NOSG	DSR (active/standby pair)	NE	Server	HA Role	Prefs																																															
				SO_HPC03	ServerSO1		10.240.10.186																																															
				SO_HPC03	ServerSO2		10.240.10.186																																															

**Procedure 13: Inhibit A and B Level Replication on C-Level Servers**

3	<p><b>Active NOAMP:</b> Verify Replication has been Inhibited.</p>	<p>After executing above steps to inhibit replication on MP(s), no alarms on GUI would be raised informing that replication on MP is disabled.</p> <p>Verification of replication inhibition on MPs can be done by analyzing NodeInfo output. InhibitRepPlans field for all the MP servers for the selected site e.g. Site SO_HPC03 shall be set as 'A B':</p> <p>Perform the following command:</p> <div style="border: 1px solid black; padding: 10px; margin: 10px 0;"> <pre>\$ sudo iqt NodeInfo</pre> <p>Expected output:</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>nodeId</th> <th>nodeName</th> <th>hostName</th> <th>nodeCapability</th> <th>inhibitRepPlans</th> <th>siteId</th> <th>excludeTables</th> </tr> </thead> <tbody> <tr> <td>A1386.099</td> <td>NO1</td> <td>NO1</td> <td>Active</td> <td></td> <td>NO_HPC03</td> <td></td> </tr> <tr> <td>B1754.109</td> <td>SO1</td> <td>SO1</td> <td>Active</td> <td></td> <td>SO_HPC03</td> <td></td> </tr> <tr> <td>C2254.131</td> <td>MP2</td> <td>MP2</td> <td>Active</td> <td>A B</td> <td>SO_HPC03</td> <td></td> </tr> <tr> <td>C2254.233</td> <td>MP1</td> <td>MP1</td> <td>Active</td> <td>A B</td> <td>SO_HPC03</td> <td></td> </tr> </tbody> </table> </div>	nodeId	nodeName	hostName	nodeCapability	inhibitRepPlans	siteId	excludeTables	A1386.099	NO1	NO1	Active		NO_HPC03		B1754.109	SO1	SO1	Active		SO_HPC03		C2254.131	MP2	MP2	Active	A B	SO_HPC03		C2254.233	MP1	MP1	Active	A B	SO_HPC03	
nodeId	nodeName	hostName	nodeCapability	inhibitRepPlans	siteId	excludeTables																															
A1386.099	NO1	NO1	Active		NO_HPC03																																
B1754.109	SO1	SO1	Active		SO_HPC03																																
C2254.131	MP2	MP2	Active	A B	SO_HPC03																																
C2254.233	MP1	MP1	Active	A B	SO_HPC03																																
THIS PROCEDURE HAS BEEN COMPLETED																																					

## Appendix C. Un-Inhibit A and B Level Replication on C-Level Servers

### Procedure 14: Un-Inhibit A and B Level Replication on C-Level Servers

<b>S T E P #</b>	<p>The intent of this procedure is to Un-inhibit A and B level replication on all C Level servers of this site</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>If this procedure fails, contact <b>My Oracle Support (MOS)</b>, and ask for assistance.</p>																																													
1. <input type="checkbox"/>	<b>Active NOAMP:</b> Login	<p>Login to the Active NOAMP server via SSH as <i>admusr</i> user.</p>																																												
2. <input type="checkbox"/>	<b>Active NOAMP:</b> Un-Inhibit replication on all C level Servers	<p>Execute the following command:</p> <pre style="border: 1px solid black; padding: 5px;">\$ for i in \$(iqt -p -z -h -fhostName NodeInfo where "nodeId like 'C*' and siteId='&lt;NE name of the site&gt;'); do iset -finhibitRepPlans='' NodeInfo where "nodeName='\$i'; done</pre> <p><b>Note:</b> NE name of the site can be found out by logging into the Active NOAMP GUI and going to <b>Configuration</b> → <b>Server Groups</b> screen.</p> <p>Please see the snapshot below for more details. E.g. if ServerSO1 belong to the site which is being recovered then siteId will be SO_HPC03.</p> <p><b>Main Menu: Configuration -&gt; Server Groups</b></p>  <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Server Group Name</th> <th>Level</th> <th>Parent</th> <th>Function</th> <th>NE</th> <th>Server</th> <th>HA Role Pref</th> <th>VIPs</th> </tr> </thead> <tbody> <tr> <td rowspan="2">MPDG</td> <td rowspan="2">C</td> <td rowspan="2">SOSG</td> <td rowspan="2">DSR (multi-active cluster)</td> <td>SO_HPC03</td> <td>ServerMP1</td> <td></td> <td></td> </tr> <tr> <td>SO_HPC03</td> <td>ServerMP2</td> <td></td> <td></td> </tr> <tr> <td rowspan="2">NDSG</td> <td rowspan="2">A</td> <td rowspan="2">NONE</td> <td rowspan="2">DSR (active/standby pair)</td> <td>NO_HPC03</td> <td>ServerNO1</td> <td></td> <td>10.240.10.166</td> </tr> <tr> <td>NO_HPC03</td> <td>ServerNO2</td> <td></td> <td>10.240.10.166</td> </tr> <tr> <td rowspan="2">SOSG</td> <td rowspan="2">B</td> <td rowspan="2">NOSG</td> <td rowspan="2">DSR (active/standby pair)</td> <td>SO_HPC03</td> <td>ServerSO1</td> <td></td> <td>10.240.10.186</td> </tr> <tr> <td>SO_HPC03</td> <td>ServerSO2</td> <td></td> <td>10.240.10.186</td> </tr> </tbody> </table>	Server Group Name	Level	Parent	Function	NE	Server	HA Role Pref	VIPs	MPDG	C	SOSG	DSR (multi-active cluster)	SO_HPC03	ServerMP1			SO_HPC03	ServerMP2			NDSG	A	NONE	DSR (active/standby pair)	NO_HPC03	ServerNO1		10.240.10.166	NO_HPC03	ServerNO2		10.240.10.166	SOSG	B	NOSG	DSR (active/standby pair)	SO_HPC03	ServerSO1		10.240.10.186	SO_HPC03	ServerSO2		10.240.10.186
Server Group Name	Level	Parent	Function	NE	Server	HA Role Pref	VIPs																																							
MPDG	C	SOSG	DSR (multi-active cluster)	SO_HPC03	ServerMP1																																									
				SO_HPC03	ServerMP2																																									
NDSG	A	NONE	DSR (active/standby pair)	NO_HPC03	ServerNO1		10.240.10.166																																							
				NO_HPC03	ServerNO2		10.240.10.166																																							
SOSG	B	NOSG	DSR (active/standby pair)	SO_HPC03	ServerSO1		10.240.10.186																																							
				SO_HPC03	ServerSO2		10.240.10.186																																							

**Procedure 14: Un-Inhibit A and B Level Replication on C-Level Servers**

3.	<p><b>Active NOAMP:</b> Verify Replication has been Inhibited.</p>	<p>After executing above steps to un-inhibit replication on MP(s), no alarms on GUI would be raised informing that replication on MP is disabled.</p> <p>Verification of replication un-inhibition on MPs can be done by analyzing NodeInfo output. InhibitRepPlans field for all the MP servers for the selected site e.g. Site SO_HPC03 shall be set as 'A B':</p> <p>Perform the following command:</p> <div style="border: 1px solid black; padding: 5px; margin: 5px 0;"> <pre>\$ sudo iqt NodeInfo</pre> </div> <p>Expected output:</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>nodeId</th> <th>nodeName</th> <th>hostName</th> <th>nodeCapability</th> <th>inhibitRepPlans</th> <th>siteId</th> <th>excludeTables</th> </tr> </thead> <tbody> <tr> <td>A1386.099</td> <td>NO1</td> <td>NO1</td> <td>Active</td> <td></td> <td>NO_HPC03</td> <td></td> </tr> <tr> <td>B1754.109</td> <td>SO1</td> <td>SO1</td> <td>Active</td> <td></td> <td>SO_HPC03</td> <td></td> </tr> <tr> <td>C2254.131</td> <td>MP2</td> <td>MP2</td> <td>Active</td> <td></td> <td>SO_HPC03</td> <td></td> </tr> <tr> <td>C2254.233</td> <td>MP1</td> <td>MP1</td> <td>Active</td> <td></td> <td>SO_HPC03</td> <td></td> </tr> </tbody> </table>	nodeId	nodeName	hostName	nodeCapability	inhibitRepPlans	siteId	excludeTables	A1386.099	NO1	NO1	Active		NO_HPC03		B1754.109	SO1	SO1	Active		SO_HPC03		C2254.131	MP2	MP2	Active		SO_HPC03		C2254.233	MP1	MP1	Active		SO_HPC03	
nodeId	nodeName	hostName	nodeCapability	inhibitRepPlans	siteId	excludeTables																															
A1386.099	NO1	NO1	Active		NO_HPC03																																
B1754.109	SO1	SO1	Active		SO_HPC03																																
C2254.131	MP2	MP2	Active		SO_HPC03																																
C2254.233	MP1	MP1	Active		SO_HPC03																																
THIS PROCEDURE HAS BEEN COMPLETED																																					

## Appendix D. My Oracle Support (MOS)

MOS (<https://support.oracle.com>) is your initial point of contact for all product support and training needs. A representative at Customer Access Support (CAS) can assist you with MOS registration.

Call the CAS main number at **1-800-223-1711** (toll-free in the US), or call the Oracle Support hotline for your local country from the list at <http://www.oracle.com/us/support/contact/index.html>. When calling, make the selections in the sequence shown below on the Support telephone menu:

Select **2** for New Service Request

Select **3** for Hardware, Networking and Solaris Operating System Support

Select one of the following options:

- For Technical issues such as creating a new Service Request (SR), Select **1**
- For Non-technical issues such as registration or assistance with MOS, Select **2**

You will be connected to a live agent who can assist you with MOS registration and opening a support ticket.

MOS is available 24 hours a day, 7 days a week, 365 days a year.



## Appendix E. Locate Product Documentation on the Oracle Help Center Site

Oracle Communications customer documentation is available on the web at the Oracle Help Center (OHC) site, <http://docs.oracle.com>. You do not have to register to access these documents. Viewing these files requires Adobe Acrobat Reader, which can be downloaded at <http://www.adobe.com>.

1. Access the Oracle Help Center site at <http://docs.oracle.com>
2. Click **Industries**.
3. Under the Oracle Communications subheading, click the **Oracle Communications documentation** link.  
The Communications Documentation page appears. Most products covered by these documentation sets will appear under the headings “Network Session Delivery and Control Infrastructure” or “Platforms.”
4. Click on your Product and then the Release Number.  
A list of the entire documentation set for the selected product and release appears.
5. To download a file to your location, right-click the **PDF** link, select **Save target as** (or similar command based on your browser), and save to a local folder.