

## **Oracle® Communications**

Diameter Signaling Router Diameter Common

Release 8.3

**E93191**

September 2018

Copyright © 2011, 2018, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

This documentation is in preproduction status and is intended for demonstration and preliminary use only. It may not be specific to the hardware on which you are using the software. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to this documentation and will not be responsible for any loss, costs, or damages incurred due to the use of this documentation.

The information contained in this document is for informational sharing purposes only and should be considered in your capacity as a customer advisory board member or pursuant to your beta trial agreement only. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, and timing of any features or functionality described in this document remains at the sole discretion of Oracle.

This document in any form, software or printed matter, contains proprietary information that is the exclusive property of Oracle. Your access to and use of this confidential material is subject to the terms and conditions of your Oracle Master Agreement, Oracle License and Services Agreement, Oracle PartnerNetwork Agreement, Oracle distribution agreement, or other license agreement which has been executed by you and Oracle and with which you agree to comply. This document and information contained herein may not be disclosed, copied, reproduced, or distributed to anyone outside Oracle without prior written consent of Oracle. This document is not part of your license agreement nor can it be incorporated into any contractual agreement with Oracle or its subsidiaries or affiliates.

---

# Contents

## 1 Introduction

Revision History .....	1-1
Overview .....	1-1
Scope and Audience .....	1-1
Manual Organization .....	1-2
Locate Product Documentation on the Oracle Help Center Site .....	1-2
Customer Training .....	1-2
My Oracle Support .....	1-3
Emergency Response.....	1-3

## 2 User Interface Introduction

User Interface Organization .....	2-1
User Interface Elements.....	2-2
Main Menu Options.....	2-5
Missing Main Menu Options .....	2-11
Common Graphical User Interface Elements .....	2-11
Supported Browsers.....	2-11
System Login Page .....	2-12
Main Menu Icons.....	2-13
Work Area Displays .....	2-14
Customizing the Splash Page Welcome Message.....	2-17
Column Headers (Sorting) .....	2-17
Page Controls .....	2-17
Clear Field Control.....	2-18
Optional Layout Element Toolbar.....	2-18
Filters.....	2-19
Pause Updates.....	2-22
Max Records Per Page Controls .....	2-22

## 3 Diameter Common on the NOAM

Overview.....	3-1
Dashboard.....	3-1

Metric Groups .....	3-2
Metric Threshold Configuration Sets .....	3-9
Dashboard Network Elements .....	3-16
Dashboard Networks .....	3-17
MCCMNC Configuration .....	3-18
MCCMNC Elements .....	3-20
Adding MCCMNC Entries .....	3-20
Editing MCCMNC Entries .....	3-21
Deleting MCCMNC Entries .....	3-22
MCCMNC Mapping Configuration .....	3-22
MCCMNC Mapping Elements .....	3-24
Adding MCCMNC Mapping Entries .....	3-25
Editing MCCMNC Mapping Entries .....	3-26
Deleting MCCMNC Mapping Entries .....	3-26
Common Application Options .....	3-27

## 4 Diameter Common on the SOAM

Overview .....	4-1
Dashboard .....	4-1
MCC Ranges Configuration .....	4-2
MCC Ranges Elements .....	4-3
Adding MCC Ranges .....	4-3
Editing MCC Ranges .....	4-4
Deleting MCC Ranges .....	4-5
MPs .....	4-5
MPs Profiles Elements .....	4-7
Editing Configurable MP Profile Parameters .....	4-13
MPs Profile Assignments Elements .....	4-13
Assigning MP Profiles to MPs .....	4-14

## 5 Diameter Common Bulk Import and Export

DSR Bulk Import .....	5-1
Bulk Import elements .....	5-5
Using an Import File to insert DSR Configuration Data .....	5-5
Using an Import File to update DSR Configuration Data .....	5-6
Using an Import File to delete DSR Configuration Data .....	5-7
DSR Bulk Export .....	5-8
Bulk Export elements .....	5-10
Manually Exporting a Configuration Data File Once .....	5-13
Scheduling Periodic Automatic Exports of Configuration Data .....	5-14
Bulk Import and Export CSV File Formats and Contents .....	5-16

## List of Figures

2-1	Oracle System Login.....	2-12
2-2	Paginated Table.....	2-15
2-3	Scrollable Table.....	2-15
2-4	Form Page.....	2-16
2-5	Tabbed Pages.....	2-16
2-6	Tabbed Pages.....	2-16
2-7	Report Output.....	2-17
2-8	Sorting a Table by Column Header.....	2-17
2-9	Clear Field Control X.....	2-18
2-10	Optional Layout Element Toolbar.....	2-19
2-11	Automatic Error Notification.....	2-19
2-12	Examples of Filter Styles.....	2-20



## List of Tables

2-1	User Interface Elements.....	2-3
2-2	Main Menu Options.....	2-6
2-3	Main Menu Icons.....	2-13
2-4	Example Action Buttons.....	2-18
2-5	Submit Buttons.....	2-18
2-6	Filter Control Elements.....	2-20
3-1	Metric Groups Elements.....	3-3
3-2	Address Resolution Metrics Elements.....	3-3
3-3	Alarms Metrics Elements.....	3-4
3-4	Connections Metrics Elements.....	3-4
3-5	MAP Interworking Metrics Elements.....	3-5
3-6	Policy & Charging Metrics Elements.....	3-6
3-7	Priority Service Metrics Elements.....	3-7
3-8	Protocol Metrics elements.....	3-7
3-9	RADIUS Metrics Elements.....	3-8
3-10	Servers Metrics Elements.....	3-8
3-11	Metric Threshold Configuration Sets Elements.....	3-9
3-12	Metric Threshold Elements.....	3-10
3-13	Dashboard Network Elements Elements.....	3-16
3-14	Dashboard Networks Elements.....	3-18
3-15	MCCMNC Elements.....	3-20
3-16	MCCMNC Mapping Elements.....	3-24
3-17	Common Application Options.....	3-27
4-1	MCC Ranges Elements.....	4-3
4-2	MP Profile Selection.....	4-6
4-3	MPs Profiles DA-MP Elements.....	4-7
4-4	MPs Profiles SS7-MP Elements.....	4-12
4-5	MPs Profile Assignments Elements.....	4-13
5-1	Bulk Import Elements.....	5-5
5-2	Bulk Export Elements.....	5-11
5-3	Application Types Supported by DSR Bulk Import and Export.....	5-16
5-4	Local Node CSV Format.....	5-17
5-5	Peer Node CSV Format.....	5-18
5-6	Peer Node Group CSV Format.....	5-19
5-7	Route Group CSV Format.....	5-20
5-8	Route List CSV Format.....	5-20
5-9	Peer Routing Rule CSV Format.....	5-21
5-10	Connection CSV Format.....	5-23
5-11	Connection Configuration Set CSV Format.....	5-24
5-12	Reroute on Answer CSV Format.....	5-26
5-13	System Options CSV Format.....	5-26
5-14	DNS Options CSV Format.....	5-28
5-15	CEX Configuration Set CSV Format.....	5-28
5-16	Capacity Configuration Set CSV Format.....	5-29
5-17	AppRouteRule CSV Format.....	5-29
5-18	Application ID CSV Format.....	5-31
5-19	CEX Parameters CSV Format.....	5-31
5-20	Pending Answer Timer CSV Format.....	5-31
5-21	Routing Option Set CSV Format.....	5-32
5-22	Peer Route Table CSV Format.....	5-33
5-23	Message Priority Configuration Set CSV Format.....	5-33

5-24	Message Throttling Configuration Set CSV Format.....	5-34
5-25	MessagecopyCfgSet CSV Format.....	5-34
5-26	Application Route Table CSV Format.....	5-35
5-27	Command Code CSV Format.....	5-35
5-28	Trace CSV Format.....	5-35
5-29	Trace Options CSV Format.....	5-36
5-30	Trace Global Options CSV Format.....	5-36
5-31	Trusted Network List CSV Format.....	5-36
5-32	Path Topology Hiding Configuration Set CSV Format.....	5-37
5-33	S6a/S6d HSS Topology Hiding Configuration Set CSV Format.....	5-37
5-34	MME/SGSN Topology Hiding Configuration Set CSV Format.....	5-38
5-35	S9 PCRF Topology Hiding Configuration Set CSV Format.....	5-39
5-36	S9 AF/pCSCF Topology Hiding Configuration Set CSV Format.....	5-40
5-37	Protected Network CSV Format.....	5-40
5-38	MCCMNC CSV Format.....	5-41
5-39	MCCMNC Mapping CSV Format.....	5-41
5-40	Reserved MCC Ranges CSV Format.....	5-42
5-41	Transaction Configuration Group CSV Format.....	5-42
5-42	Transaction Configuration Rule CSV Format.....	5-42
5-43	MP Profile Parameters CSV Record Format.....	5-43
5-44	MP Profile Assignments CSV Record Format.....	5-43
5-45	Rate Limiting Configuration CSV Record Format.....	5-43
5-46	Pending Transaction Limiting Configuration CSV Record Format.....	5-44
5-47	Egress Throttle List CSV Record Format.....	5-44
5-48	Egress Throttle Group CSV Format.....	5-45
5-49	Dashboard Network CSV Format.....	5-45
5-50	Dashboard Network Element CSV Format.....	5-45
5-51	Dashboard Metric Group CSV Format.....	5-46
5-52	Dashboard Metric Threshold Configuration Set CSV Format.....	5-46
5-53	AvpRemovalList CSV Format.....	5-47
5-54	DpdAttribute CSV Format.....	5-47
5-55	DpdDnsSet CSV Format.....	5-49
5-56	DpdRealm CSV Format.....	5-49
5-57	TrafficThrottleGroup CSV Format.....	5-49
5-58	TrafficThrottlePoint CSV Format.....	5-50
5-59	TrafficThrPointCfgSet CSV Format.....	5-50
5-60	Signaling Firewall CSV Format.....	5-50
5-61	Supported Application CSV Format.....	5-51
5-62	Address Individual CSV Format.....	5-51
5-63	Address Range CSV Format.....	5-52
5-64	Address Table CSV Format.....	5-52
5-65	Destination Table CSV Format.....	5-52
5-66	Routing Exception CSV Format.....	5-53
5-67	Address Resolution CSV Format.....	5-53
5-68	Option CSV Format.....	5-55
5-69	Supported Application CSV Format.....	5-56
5-70	Routing Exception CSV Format.....	5-57
5-71	Default Destination Table CSV Format.....	5-57
5-72	Address Resolution CSV Format.....	5-57
5-73	Option CSV Format.....	5-59
5-74	System Option CSV Format.....	5-60
5-75	Message Copy CSV Format.....	5-61
5-76	SBR CSV Format.....	5-62
5-77	SBR CSV Format.....	5-62



5-78	IPFE IpfeOption CSV Format.....	5-63
5-79	IPFE IpfeListTsa CSV Format.....	5-65
5-80	PCRFs CSV Format.....	5-65
5-81	Binding Key Priority CSV Format.....	5-65
5-82	Policy DRA Options CSV Format.....	5-66
5-83	PCA Error Codes CSV Format.....	5-67
5-84	PCA Access Point Names CSV Format.....	5-68
5-85	Alarm Settings CSV Format.....	5-68
5-86	Congestion Options CSV Format.....	5-69
5-87	PCRF Pools CSV Record Format.....	5-70
5-88	PCRF Sub-Pool Selection Rules CSV Record Format.....	5-71
5-89	PCRF Pool To PRT Mapping CSV Record Format.....	5-71
5-90	General Options CSV Record Format.....	5-71
5-91	Online Charging DRA OCS Session State CSV Record Format.....	5-72
5-92	Online Charging DRA Realm CSV Record Format.....	5-72
5-93	Online Charging DRA Network-Wide Options CSV Record Format.....	5-73
5-94	PDRA Policy Clients CSV Record Format.....	5-73
5-95	Online Charging DRA OCSs CSV Record Format.....	5-73
5-96	Online Charging DRA CTFs CSV Record Format.....	5-74
5-97	Suspect Binding Removal Rules CSV Record Format.....	5-74
5-98	Mapiwf Diameter Realm CSV Format.....	5-75
5-99	Mapiwf DiamIdGta CSV Format.....	5-75
5-100	Mapiwf GtaRangeToPc CSV Format.....	5-75
5-101	Mapiwf MD-IWF Option CSV Format.....	5-76
5-102	Mapiwf DM-IWF Option CSV Format.....	5-77
5-103	Mapiwf Diameter Exception CSV Format.....	5-77
5-104	Mapiwf MAP Exception CSV Format.....	5-78
5-105	Mapiwf CCNDC Mapping CSV Format.....	5-78
5-106	GLA Exception CSV Record Format.....	5-79
5-107	GLA Option CSV Record Format.....	5-79
5-108	GLA Alarm CSV Record Format.....	5-80
5-109	RADIUS Message Authentication Cfg Sets CSV Format.....	5-80
5-110	RADIUS Shared Secret Cfg Set CSV Format.....	5-81
5-111	RADIUS Ingress Status Server Cfg Set CSV Format.....	5-82
5-112	RADIUS Message Conversion Cfg Set CSV Format.....	5-82
5-113	RADIUS NAS Node CSV Format.....	5-82
5-114	RADIUS Network Options CSV Format.....	5-83
5-115	SBR Database CSV Record Format.....	5-83
5-116	SBR Database Resizing CSV Record Format.....	5-83
5-117	SBR Data Migration Plan CSV Record Format.....	5-84



---

# Introduction

The *Diameter Common User's Guide* and Help provide information about how to use the Diameter Common GUI pages to configure Network Identifiers and MP Profiles, and how to export and import configuration data for Diameter, Diameter Common, IPFE, MAP-Diameter Interworking, and DSR Applications.

## Revision History

Date	Description
December 2016	<ul style="list-style-type: none"><li>• New CSV format table for Signaling Firewall</li><li>• Modified existing CSV format tables<ul style="list-style-type: none"><li>– System Options CSV format table</li><li>– Peer Routing Rule CSV format table</li><li>– AppRouteRule CSV format table</li><li>– Routing Option Set CSV format table</li><li>– Policy DRA Options CSV format table</li></ul></li></ul>

## Overview

The *Diameter Common User's Guide* and Help provide information about how to use the Diameter Common GUI pages to perform configuration and DSR Bulk Import/Export tasks.

The document provides the following types of information:

- Procedures to configure Diameter Common components
- Procedures to perform DSR Bulk Import/Export operations

## Scope and Audience

The Diameter Common documentation is intended for anyone responsible for configuring and using the Diameter Common functions.

Users of this manual must have a working knowledge of telecommunications, of network installations, and of the product that is using the Diameter Common functions.

The Diameter Common software component is shared by multiple applications in the product line. For this reason, this document includes references to the shared applications, and describes GUI options that are not visible or applicable to UDR. For example, DSR applications (such as RBAR, FABR, CPA, and PCA) and IPFE are currently not used by UDR, so disregard any references to these applications.

## Manual Organization

This manual is organized into the following chapters:

- [Introduction](#) contains general information about the Diameter Common help documentation, the organization of this manual, and how to get technical assistance.
- [User Interface Introduction](#) describes the organization and usage of the application user interface. In it you can find information about how the interface options are organized, how to use widgets and buttons, and how filtering and other page display options work.
- [Diameter Common on the NOAM](#) describes the configuration of the Dashboard, Metric and Dashboard Elements, MCCMNC, and MCCMNC Mapping Network Identifiers on the NOAM.
- [Diameter Common on the SOAM](#) describes the configuration of the MCC Ranges Network Identifiers and MPs (Profiles and Assignments) on the SOAM.
- [Diameter Common Bulk Import and Export](#) provides procedures and CSV file formats for use in DSR Bulk Import and Export of Diameter, Diameter Common, IPFE, and DSR Application configuration data on the NOAM and SOAM.

## Locate Product Documentation on the Oracle Help Center Site

Oracle Communications customer documentation is available on the web at the Oracle Help Center site, <http://docs.oracle.com>. You do not have to register to access these documents. Viewing these files requires Adobe Acrobat Reader, which can be downloaded at <http://www.adobe.com>.

1. Access the Oracle Help Center site at <http://docs.oracle.com>.
2. Click **Industries**.
3. Under the Oracle Communications subheading, click **Oracle Communications documentation** link.

The Communications Documentation page displays. Most products covered by these documentation sets display under the headings Network Session Delivery and Control Infrastructure and Platforms.

4. Click on your product and then the release number.

A list of the documentation set for the selected product and release displays.

5. To download a file to your location, right-click the **PDF** link, select **Save target as** (or similar command based on your browser), and save to a local folder.

## Customer Training

Oracle University offers training for service providers and enterprises. Visit our web site to view, and register for, Oracle Communications training at <http://education.oracle.com/communication>

To obtain contact phone numbers for countries or regions, visit the Oracle University Education web site at [www.oracle.com/education/contacts](http://www.oracle.com/education/contacts)

## My Oracle Support

My Oracle Support (<https://support.oracle.com>) is your initial point of contact for all product support and training needs. A representative at Customer Access Support can assist you with My Oracle Support registration.

Call the Customer Access Support main number at 1-800-223-1711 (toll-free in the US), or call the Oracle Support hotline for your local country from the list at <http://www.oracle.com/us/support/contact/index.html>. When calling, make the selections in the sequence shown below on the Support telephone menu:

1. Select **2** for New Service Request
2. Select **3** for Hardware, Networking and Solaris Operating System Support
3. Select one of the following options:
  - For Technical issues such as creating a new Service Request (SR), select **1**
  - For Non-technical issues such as registration or assistance with My Oracle Support, select **2**

You are connected to a live agent who can assist you with My Oracle Support registration and opening a support ticket.

My Oracle Support is available 24 hours a day, 7 days a week, 365 days a year.

## Emergency Response

In the event of a critical service situation, emergency response is offered by the Customer Access Support (CAS) main number at 1-800-223-1711 (toll-free in the US), or by calling the Oracle Support hotline for your local country from the list at <http://www.oracle.com/us/support/contact/index.html>. The emergency response provides immediate coverage, automatic escalation, and other features to ensure that the critical situation is resolved as rapidly as possible.

A critical situation is defined as a problem with the installed equipment that severely affects service, traffic, or maintenance capabilities, and requires immediate corrective action. Critical situations affect service and/or system operation resulting in one or several of these situations:

- A total system failure that results in loss of all transaction processing capability
- Significant reduction in system capacity or traffic handling capability
- Loss of the system's ability to perform automatic system reconfiguration
- Inability to restart a processor or the system
- Corruption of system databases that requires service affecting corrective actions
- Loss of access for maintenance or recovery operations
- Loss of the system ability to provide any required critical or major trouble notification

Any other problem severely affecting service, capacity/traffic, billing, and maintenance capabilities may be defined as critical by prior discussion and agreement with Oracle.



---

## User Interface Introduction

This section describes the organization and usage of the application's user interface. In it you can find information about how the interface options are organized, how to use widgets and buttons, and how filtering and other page display options work.

### User Interface Organization

The user interface is the central point of user interaction within an application. It is a Web-based graphical user interface (GUI) that enables remote user access over the network to an application and its functions.

The core framework presents a common set of Main Menu options that serve various applications. The common Main Menu options are:

- Administration
- Configuration
- Alarms and Events
- Security Log
- Status and Manage
- Measurements
- Help
- Legal Notices
- Logout

Applications build upon this framework to present features and functions. Depending on your application, some or all of the following Main Menu options may appear on the Network Operation, Administration, and Maintenance (NOAM) GUI:

- Communication Agent
- Diameter Common
- Diameter
- UDR (User Data Repository)
- MAP-Diameter IWF
- RADIUS (Remote Authentication Dial-In User Service)
- SBR (Session Binding Repository)

- Policy and Charging
- DCA (DOIC Capabilities Announcement) Framework

The DSR System OAM GUI may present even more Main Menu options as listed below. The end result is a flexible menu structure that changes according to the application needs and features activated.

- Transport Manager
- SS7/Sigtran
- RBAR (Range Based Address Resolution)
- FABR (Full Address Based Resolution)
- GLA (Gateway Location Application)
- MAP-Diameter IWF
- RADIUS
- SBR
- Mediation
- Policy and Charging
- DCA Framework
- IPFE (IP Front End)

Note that the System OAM (SOAM) Main Menu options differ from the Network OAM (NOAM) options. Some Main Menu options are configurable from the NOAM server and view-only from the SOAM (SOAM) server. This remains true for other applications.

## User Interface Elements

[Table 2-1](#) describes elements of the user interface.



**Table 2-1 User Interface Elements**

Element	Location	Function
Identification Banner	Top bar across the web page	<p>The left side of the banner provides the following information:</p> <ul style="list-style-type: none"><li>• Displays the company name,</li><li>• Oracle product name and version, and</li><li>• the alarm panel.</li></ul> <p>The right side of the banner:</p> <ul style="list-style-type: none"><li>• Allows you to pause any software updates.</li><li>• Links to the online help for all software.</li><li>• Shows the user name of the currently logged-in user.</li><li>• Provides a link to log out of the GUI.</li></ul>
Main Menu	Left side of screen, under banners	<p>A tree-structured menu of all operations that can be performed through the user interface. The plus character (+) indicates a menu item contains subfolders.</p> <ul style="list-style-type: none"><li>• To display submenu items, click the plus character, the folder, or anywhere on the same line.</li><li>• To select a menu item that does not have submenu items, click on the menu item text or its associated symbol.</li></ul>

**Table 2-1 (Cont.) User Interface Elements**

Element	Location	Function
Work Area	Right side of panel under status	<p>Consists of three sections: Page Title Area, Page Control Area (optional), and Page Area.</p> <ul style="list-style-type: none"><li>• <b>Page Title Area:</b> Occupies the top of the work area. It displays the title of the current page being displayed, date and time, and includes a link to context-sensitive help.</li><li>• <b>Page Control Area:</b> Located below the Page Title Area, this area shows controls for the Page Area (this area is optional). When available as an option, filter controls display in this area. The Page Control Area contains the optional layout element toolbar, which displays different elements depending on which GUI page is selected. For more information, see <a href="#">Optional Layout Element Toolbar</a>.</li><li>• <b>Page Area:</b> Occupies the bottom of the work area. This area is used for all types of operations. It displays all options, status, data, file, and query screens. Information or error messages are displayed in a message box at the top of this section. A horizontal and/or vertical scroll bar is provided when the displayed information exceeds the page area of the screen. When a user first logs in, this area displays the application</li></ul>

**Table 2-1 (Cont.) User Interface Elements**

Element	Location	Function
		user interface page. The page displays a user-defined welcome message. To customize the message, see <a href="#">Customizing the Login Message</a> .
Session Banner	Across the bottom of the web page	<p>The left side of the banner provides the following session information:</p> <ul style="list-style-type: none"> <li>• The name of the machine to which the user is connected, and whether the user is connected via the VIP or directly to the machine.</li> <li>• The HA state of the machine to which the user is connected.</li> <li>• The role of the machine to which the user is connected.</li> </ul> <p>The right side of the banner shows the alarm panel.</p>

## Main Menu Options

[Table 2-2](#) describes all main menu user interface options.

---

**Note:** The menu options can differ according to the permissions assigned to a user's log-in account. For example, the Administration menu options do not appear on the screen of a user who does not have administrative privileges.

---



---

**Note:** Some menu items are configurable only on the Network OAM and view-only on the System OAM; and some menu options are configurable only on the System OAM.

---



---

**Note:** Some features do not appear in the main menu until the features are activated.

---

**Table 2-2 Main Menu Options**

Menu Item	Function
Administration	<p>The Administration menu allows the user to:</p> <ul style="list-style-type: none"><li>• General Options. Configure options such as password history and expiration, login message, welcome message, and the number of failed login attempts before an account is disabled</li><li>• Set up and manage user accounts</li><li>• Configure group permissions</li><li>• View session information</li><li>• Manage sign-on certificates</li><li>• Authorize IP addresses to access the user interface</li><li>• Configure SFTP user information</li><li>• View the software versions report</li><li>• Upgrade management including backup and reporting</li><li>• Authenticate LDAP servers</li><li>• Configure SNMP trapping services</li><li>• Configure an export server</li><li>• Configure DNS elements</li></ul>
Configuration	<p>On the NOAM, allows the user to configure:</p> <ul style="list-style-type: none"><li>• Network Elements</li><li>• Network Devices</li><li>• Network Routes</li><li>• Services</li><li>• Servers</li><li>• Server Groups</li><li>• Resource Domains</li><li>• Places</li><li>• Place Associations</li><li>• Interface and Port DSCP</li></ul>
Alarms and Events	<p>Allows the user to view:</p> <ul style="list-style-type: none"><li>• Active alarms and events</li><li>• Alarm and event history</li><li>• Trap log</li></ul>
Security Log	<p>Allows the user to view, export, and generate reports from security log history.</p>
Status and Manage	<p>Allows the user to monitor the individual and collective status of Network Elements, Servers, HA functions, Databases, KPIs, system Processes, and Tasks. The user can perform actions required for server maintenance, database management, data, and ISO file management.</p>
Measurements	<p>Allows the user to view and export measurement data.</p>

**Table 2-2 (Cont.) Main Menu Options**

Menu Item	Function
Transport Manager (optional)	On the SOAM, allows the user to configure adjacent nodes, configuration sets, or transports. A maintenance option allows the user to perform enable, disable, and block actions on the transport entries. This option only appears with the DSR application.
Communication Agent (optional)	Allows the user to configure Remote Servers, Connection Groups, and Routed Services. The user can perform actions to enable, disable, and block connections. Also allows the user to monitor the status of Connections, Routed Services, and HA Services.
SS7/Sigtran (optional)	On the SOAM, allows the user to configure various users, groups, remote signaling points, links, and other items associated with SS7/Sigtran; perform maintenance and troubleshooting activities; and provides a command line interface for bulk loading SS7 configuration data. This option only appears with the DSR application.
Diameter Common (optional)	<p>Allows the user to view or configure:</p> <ul style="list-style-type: none"> <li>• Dashboard, configure on the NOAM; view on both OAMs</li> <li>• Network Identifiers on the SOAM - MCC Ranges</li> <li>• Network Identifiers on the NOAM - MCCMNC and MCCMNC Mapping</li> <li>• MPs (on the SOAM) - editable Profile parameters and Profile Assignments</li> </ul> <p>The DSR Bulk Import and Export functions are available on both OAMs for the data configured on that OAM.</p>
Diameter (optional)	<p>Allows the user to configure, modify, and monitor Diameter routing:</p> <ul style="list-style-type: none"> <li>• On the NOAMP, Diameter Topology Hiding and Egress Throttle List configuration</li> <li>• On the SOAM, Diameter Configuration, Maintenance, Reports, Troubleshooting with IDIH, AVP Dictionary, and Diameter Mediation configuration</li> </ul>
UDR (User Data Repository) (optional)	Allows the user to add, edit, store, and manage subscriber and pool data. The user can also monitor the import, export, and subscribing client status. This option only appears with the UDR application.

**Table 2-2 (Cont.) Main Menu Options**

Menu Item	Function
RBAR (Range-Based Address Resolution) (optional)	<p>Allows the user to configure the following Range-Based Address Resolution (RBAR) settings:</p> <ul style="list-style-type: none"><li>• Applications</li><li>• Exceptions</li><li>• Destinations</li><li>• Address Tables</li><li>• Addresses</li><li>• Address Resolutions</li><li>• System Options</li></ul> <p>This is accessible from the SOAM only. This option only appears with the DSR application.</p>
FABR (Full Address Based Resolution) (optional)	<p>Allows the user to configure the following Full Address Based Resolution (FABR) settings:</p> <ul style="list-style-type: none"><li>• Applications</li><li>• Exceptions</li><li>• Default Destinations</li><li>• Address Resolutions</li><li>• System Options</li></ul> <p>This is accessible from the SOAM only. This option is only available with the DSR application.</p>
Gateway Location Application (optional)	<p>On the SOAM, allows the user to perform configuration tasks, edit options, and view elements for:</p> <ul style="list-style-type: none"><li>• Exceptions</li><li>• Options</li></ul> <p>GLA can deploy with Policy DRA (in the same DA-MP or a separate DA-MP). This option only appears with the DSR application.</p>
MAP-Diameter Interworking (optional)	<p>On the SOAM, allows the user to perform configuration tasks, edit options, and view elements for the DM-IWF DSR Application:</p> <ul style="list-style-type: none"><li>• DM-IWF Options</li><li>• Diameter Exception</li></ul> <p>On the NOAMP, allows the user to perform configuration tasks, edit options, and view elements for the MD-IWF SS7 Application:</p> <ul style="list-style-type: none"><li>• MD-IWF Options</li><li>• Diameter Realm</li><li>• Diameter Identity GTA</li><li>• GTA Range to PC</li><li>• MAP Exception</li><li>• CCNDC Mapping</li></ul> <p>This option only appears with the DSR application.</p>

**Table 2-2 (Cont.) Main Menu Options**

Menu Item	Function
RADIUS (Remote Authentication Dial-In User Service) (optional)	<p>Allows the user to perform configuration tasks, edit system options, and view elements for:</p> <ul style="list-style-type: none"> <li>• Network Options</li> <li>• Message Authenticator Configuration Sets</li> <li>• Shared Secret Configuration Sets</li> <li>• Ingress Status Server Configuration Sets</li> <li>• Message Conversion Configuration Sets</li> <li>• NAS Node</li> </ul> <p>This option only appears with the DSR application.</p>
SBR (Session Binding Repository) (optional)	<p>Allows the user to perform configuration tasks, edit system options, and view elements for:</p> <ul style="list-style-type: none"> <li>• SBR Databases</li> <li>• SBR Database Resizing Plans</li> <li>• SBR Data Migration Plans</li> <li>• Database Options</li> </ul> <p>Additionally, on the NOAMP, users are allowed to perform maintenance tasks, edit options, and view elements for:</p> <ul style="list-style-type: none"> <li>• Maintenance <ul style="list-style-type: none"> <li>– SBR Database Status</li> <li>– SBR Status</li> <li>– SBR Database Reconfiguration Status</li> </ul> </li> </ul> <p>This option only appears with the DSR application.</p>
Mediation	<p>Allows the user to make routable decisions to end the reply, drop the message, or set the destination realm.</p>

**Table 2-2 (Cont.) Main Menu Options**

Menu Item	Function
Policy and Charging (optional)	<p data-bbox="888 321 1349 401">On the NOAMP, allows the user to perform configuration tasks, edit options, and view elements for:</p> <ul style="list-style-type: none"> <li data-bbox="888 407 1110 428">• General Options</li> <li data-bbox="888 438 1151 459">• Access Point Names</li> <li data-bbox="888 470 1317 590">• Policy DRA <ul style="list-style-type: none"> <li data-bbox="937 499 1110 520">– PCRF Pools</li> <li data-bbox="937 531 1317 552">– PCRF Sub-Pool Selection Rules</li> <li data-bbox="937 562 1235 583">– Network-Wide Options</li> </ul> </li> <li data-bbox="888 600 1179 720">• Online Charging DRA <ul style="list-style-type: none"> <li data-bbox="937 627 1179 648">– OCS Session State</li> <li data-bbox="937 659 1065 680">– Realms</li> <li data-bbox="937 690 1235 711">– Network-Wide Options</li> </ul> </li> <li data-bbox="888 726 1094 747">• Alarm Settings</li> <li data-bbox="888 758 1146 779">• Congestion Options</li> </ul> <p data-bbox="888 789 1349 869">Additionally on the NOAMP, users are allowed to perform maintenance tasks, edit options, and view elements for:</p> <ul style="list-style-type: none"> <li data-bbox="888 875 1312 1058">• Maintenance <ul style="list-style-type: none"> <li data-bbox="937 905 1203 926">– SBR Database Status</li> <li data-bbox="937 936 1102 957">– SBR Status</li> <li data-bbox="937 968 1312 1026">– SBR Database Reconfiguration Status</li> <li data-bbox="937 1037 1227 1058">– Policy Database Query</li> </ul> </li> </ul> <p data-bbox="888 1068 1338 1148">On the SOAM, allows the user to perform configuration tasks, edit options, and view elements for:</p> <ul style="list-style-type: none"> <li data-bbox="888 1155 1110 1176">• General Options</li> <li data-bbox="888 1186 1151 1207">• Access Point Names</li> <li data-bbox="888 1218 1317 1499">• Policy DRA <ul style="list-style-type: none"> <li data-bbox="937 1247 1062 1268">– PCRFs</li> <li data-bbox="937 1278 1208 1299">– Binding Key Priority</li> <li data-bbox="937 1310 1110 1331">– PCRF Pools</li> <li data-bbox="937 1341 1284 1362">– PCRF Pool to PRT Mapping</li> <li data-bbox="937 1373 1317 1394">– PCRF Sub-Pool Selection Rules</li> <li data-bbox="937 1404 1130 1425">– Policy Clients</li> <li data-bbox="937 1436 1325 1457">– Suspect Binding Removal Rules</li> <li data-bbox="937 1467 1118 1488">– Site Options</li> </ul> </li> <li data-bbox="888 1509 1179 1656">• Online Charging DRA <ul style="list-style-type: none"> <li data-bbox="937 1539 1045 1560">– OCSs</li> <li data-bbox="937 1570 1045 1591">– CTFs</li> <li data-bbox="937 1602 1179 1623">– OCS Session State</li> <li data-bbox="937 1633 1065 1654">– Realms</li> </ul> </li> <li data-bbox="888 1667 1065 1688">• Error Codes</li> <li data-bbox="888 1698 1094 1719">• Alarm Settings</li> <li data-bbox="888 1730 1146 1751">• Congestion Options</li> </ul> <p data-bbox="888 1766 1297 1818">This option only appears with the DSR application.</p>



**Table 2-2 (Cont.) Main Menu Options**

Menu Item	Function
DCA Framework (optional)	Allows the user to perform configuration tasks, edit system options, and view elements for DCA applications: <ul style="list-style-type: none"> <li>• Custom MEALs (Measurements, Events, Alarms, and Logs)</li> <li>• General Options</li> <li>• Trial MPs assignment</li> <li>• Application Control</li> <li>• System Options</li> </ul>
IPFE (optional)	Allows the user to configure IP Front End (IPFE) options and IP List TSAs. This is accessible from the SOAM server only. This option only appears with the DSR application.
Help	Launches the Help system for the user interface
Legal Notices	Product Disclaimers and Notices
Logout	Allows the user to log out of the user interface

## Missing Main Menu Options

Permissions determine which Main Menu options are visible to users. Permissions are defined through the Group Administration page. The default group, admin, is permitted access to all GUI options and functionality. Additionally, members of the admin group set permissions for other users.

Main Menu options vary according to the group permissions assigned to a user's account. Depending on your user permissions, some menu options may be missing from the Main Menu. For example, Administration menu options do not appear on your screen if you do not have administrative permissions. For more information about user permissions, see *Group Administration* in the OAM section of the online help, or contact your system administrator.

## Common Graphical User Interface Elements

Common controls allow you to easily navigate through the system once you become familiar with the GUI. The location of the controls remains static for all pages that use the controls. For example, after you become familiar with the location of the display filter, you no longer need to search for the control on subsequent pages because the location is static.

## Supported Browsers

This application supports the use of Microsoft® Internet Explorer 8.0, 9.0, or 10.0.

is designed to work with most modern HTML5 compliant browsers and uses both JavaScript and cookies. Please refer to the [Oracle Software Web Browser Support Policy](#) for details

## System Login Page

Access to the user interface begins at the System Login page. The System Login page allows users to log in with a username and password and provides the option of changing the password upon login. The System Login page also features a date and time stamp reflecting the time the page was last refreshed. Additionally, a customizable login message appears just below the **Log In** button.

The user interface is accessed using HTTPS, a secure form of the HTTP protocol. When accessing a server for the first time, HTTPS examines a web certificate to verify the identity of the server. The configuration of the user interface uses a self-signed web certificate to verify the identity of the server. When the server is first accessed, the supported browser warns the user that the server is using a self-signed certificate. The browser requests confirmation that the server can be trusted. The user is required to confirm the browser request to gain access.

### Customizing the Login Message

Before logging in, the System Login page appears. You can create a login message that appears just below the **Log In** button on the System Login page.

**Figure 2-1 Oracle System Login**

**ORACLE®**

**Oracle System Login** Wed Jul 8 14:20:00 2015 EDT

**Log In**

Enter your username and password to log in

Username:

Password:

☐ Change password

**Log In**

Welcome to the Oracle System Login.

Unauthorized access is prohibited. This Oracle system requires the use of Microsoft Internet Explorer 8.0, 9.0, or 10.0 with support for JavaScript and cookies.

*Oracle and Java are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.*

*Copyright © 2010, 2015, [Oracle](#) and/or its affiliates. All rights reserved.*

1. From the **Main Menu**, click **Administration > General Options**.

The General Options Administration page appears.

2. Locate **LoginMessage** in the **Variable** column.

3. Enter the login message text in the **Value** column.
4. Click **OK** or **Apply** to submit the information.

A status message appears at the top of the Configuration Administration page to inform you if the operation was successful.

The next time you log in to the user interface, the login message text displays.

### Accessing the DSR Graphical User Interface

In DSR, some configuration is done at the NOAM server, while some is done at the SOAM server. Because of this, you need to access the DSR graphical user interface (GUI) from two servers. Certificate Management (Single Sign-On) can be configured to simplify accessing the DSR GUI on the NOAM and the SOAM.

For information on configuring Single Sign-On certificates, see **OAM > Administration > Access Control > Certificate Management** in the DSR online help.

After the certificates have been configured, you can log into the DSR GUI on any NOAM or SOAM, and access the DSR GUI on other servers (NOAM or other SOAMs) without having to re-enter your login credentials.

1. In the browser URL field, enter the fully qualified hostname of the NOAM server, for example `https://dsr-no.yourcompany.com`.

When using Single Sign-On, you cannot use the IP address of the server.

2. When prompted by the browser, confirm that the server can be trusted.

The System Login page appears.

3. Enter the Username and Password for your account.

The DSR GUI for the NOAM appears.

4. To access the DSR GUI for the SOAM, open another browser window and enter the fully qualified hostname of the SOAM.


The DSR GUI for the SOAM appears

You can toggle between the DSR GUI on the NOAM and the DSR GUI on the SOAM as you perform configuration tasks.











## Main Menu Icons

This table describes the icons used in the Main Menu.

**Table 2-3 Main Menu Icons**

Icon	Name	Description
	Folder	Contains a group of operations. If the folder is expanded by clicking the plus (+) sign, all available operations and sub-folders are displayed. Clicking the minus (-) collapses the folder.

**Table 2-3 (Cont.) Main Menu Icons**

Icon	Name	Description
	Config File	Contains operations in an Options page.
	File with Magnifying Glass	Contains operations in a Status View page.
	File	Contains operations in a Data View page.
	Multiple Files	Contains operations in a File View page.
	File with Question Mark	Contains operations in a Query page.
	User	Contains operations related to users.
	Group	Contains operations related to groups.
	Task	Contains operations related to Tasks
	Help	Launches the Online Help.
	Logout	Logs the user out of the user interface.

## Work Area Displays

In the user interface, tables, forms, tabbed pages, and reports are the most common formats.

---

**Note:** Screen shots are provided for reference only and may not exactly match a specific application's GUI.

---

### Tables

Paginated tables describe the total number of records being displayed at the beginning and end of the table. They provide optional pagination with **First | Prev | Next | Last** links at both the beginning and end of this table type. Paginated tables also contain

action links on the beginning and end of each row. For more information on action links and other page controls, see [Page Controls](#).

**Figure 2-2 Paginated Table**

Displaying Records 1-1 of 1 | [First](#) | [Prev](#) | [Next](#) | [Last](#)

Action	System ID	IP Address	Permission	Action
<a href="#">Edit</a> <a href="#">Delete</a>	lisa	10.25.62.4	READ_WRITE	<a href="#">Edit</a> <a href="#">Delete</a>

Displaying Records 1-1 of 1 | [First](#) | [Prev](#) | [Next](#) | [Last](#)

Scrollable tables display all of the records on a single page. The scroll bar, located on the right side of the table, allows you to view all records in the table. Scrollable tables also provide action buttons that operate on selected rows. For more information on buttons and other page controls, see [Page Controls](#).

**Figure 2-3 Scrollable Table**

Sequence #	Alarm ID	Timestamp	Severity	Product	Process	NE	Server	Type
3498	31201	2009-Jun-11 18:07:41.214 UTC	MAJOR	MiddleWare	procmgr	OAMPNE	teks8011006	PROG
5445	31201	2009-Jun-11 18:07:27.137 UTC	MAJOR	MiddleWare	procmgr	SOAMP	teks8011002	PROG
5443	31107	2009-Jun-11 18:07:24.704 UTC	MINOR	MiddleWare	inetmerge	SOAMP	teks8011002	COLL
5444	31107	2009-Jun-11 18:07:24.704 UTC	MINOR	MiddleWare	inetmerge	SOAMP	teks8011002	COLL
5441	31209	2009-Jun-11 18:07:22.640 UTC	MINOR	MiddleWare	re.portmap	SOAMP	teks8011002	SW

[Export](#)

---

**Note:** Multiple rows can be selected in a scrollable table. Add rows one at a time using CTRL-click. Add a span of rows using SHIFT-click.

---

## Forms

Forms are pages on which data can be entered. Forms are typically used for configuration. Forms contain fields and may also contain a combination of lists, buttons, and links.

**Figure 2-4 Form Page**

Username:  (5-16 characters)

Group:

Time Zone:

Maximum Concurrent Logins:  Maximum concurrent logins for a user (0=no limit).  
[Default = 1; Range = 0-50]

Session Inactivity Limit:  Time (in minutes) after which login sessions expire (0 = never).  
[Default = 120; Range = 0-120]

Comment:  (max 64 characters)

Temporary Password:  (8-16 characters)

Re-type Password:  (8-16 characters)

**Tabbed pages**

Tabbed pages provide collections of data in selectable tabs. Click on a tab to see the relevant data on that tab. Tabbed pages also group Retrieve, Add, Update, and Delete options on one page. Click on the relevant tab for the task you want to perform and the appropriate fields populate on the page. Retrieve is always the default for tabbed pages.

**Figure 2-5 Tabbed Pages**

Entire Network	*	System.CPU_CoreUtilPct_Average		System.CPU_CoreUtilPct_Peak			
NOAMP		Timestamp	System CPU UtilPct Average	System CPU UtilPct Peak	System Disk UtilPct Average	System Disk UtilPct Peak	System RAM UtilPct Average
SOAM							
		10/22/2009 19:45	6.764068	44	0.520000	1	7.939407
		10/22/2009 20:00	7.143644	25	0.520000	1	8.523822

**Figure 2-6 Tabbed Pages**

**Retrieve**

Fields marked with a red asterisk (\*) require a value.

Field	Value	Description
Network Entity	<input type="text"/>	* Numeric identifier for the Network Entity 1-15 DIGITS

**Reports**

Reports provide a formatted display of information. Reports are generated from data tables by clicking **Report**. Reports can be viewed directly on the user interface, or they can be printed. Reports can also be saved to a text file.

**Figure 2-7 Report Output**

```

=====
User Account Usage Report
=====

Report Generated: Fri Jun 19 19:30:55 2009 UTC
From: Unknown Network OAM&P on host teks5001701
Report Version: 1.0
User: guiadmin

-----
Username           Date of Last Login   Days Since Last Login   Account Status
-----
guiadmin           2009-06-19 19:00:17   0                       enabled
-----

End of User Account Usage Report
=====

```

## Customizing the Splash Page Welcome Message

When you first log in to the user interface, the splash page appears. Located in the center of the main work area is a customizable welcome message. Use this procedure to create a message suitable for your needs.

1. From the **Main Menu**, click **Administration > General Options**.
2. Locate **Welcome Message** in the **Variable** column.
3. Enter the desired welcome message text in the **Value** column.
4. Click **OK** to save the change or **Cancel** to undo the change and return the field to the previously saved value.

A status message appears at the top of the page to inform you if the operation was successful.

The next time you log in to the user interface, the new welcome message text is displayed.

## Column Headers (Sorting)

You can sort a table by a column by clicking the column header. However, sorting is not necessarily available on every column. Sorting does not affect filtering.

When you click the header of a column that the table can be sorted by, an indicator appears in the column header showing the direction of the sort. See [Figure 2-8](#). Clicking the column header again reverses the direction of the sort.

**Figure 2-8 Sorting a Table by Column Header**

Local Node Name	▼	Realm	FQDN	SCTP Listen Port	TCP Listen Port	Connection Configuration Set	CEX Configuration Set	IP Addresses
-----------------	---	-------	------	------------------	-----------------	------------------------------	-----------------------	--------------

## Page Controls

User interface pages contain controls, such as buttons and links, that perform specified functions. The functions are described by the text of the links and buttons.



---

**Note:** Disabled buttons are grayed out. Buttons that are irrelevant to the selection or current system state, or which represent unauthorized actions as defined in Group Administration, are disabled. For example, **Delete** is disabled for users without Global Data Delete permission. Buttons are also disabled if, for example, multiple servers are selected for an action that can only be performed on a single server at a time.

---

Table 2-4 contains examples of Action buttons.

**Table 2-4 Example Action Buttons**

Action Button	Function
Insert	Inserts data into a table.
Edit	Edits data within a table.
Delete	Deletes data from table.
Change	Changes the status of a managed object.

Some Action buttons take you to another page.

Submit buttons, described in Table 2-5, are used to submit information to the server. The buttons are located in the page area and accompanied by a table in which you can enter information. The Submit buttons, except for **Cancel**, are disabled until you enter some data or select a value for all mandatory fields.

**Table 2-5 Submit Buttons**


Submit Button	Function
OK	Submits the information to the server, and if successful, returns to the View page for that table.
Apply	Submits the information to the server, and if successful, remains on the current page so that you can enter additional data.
Cancel	Returns to the View page for the table without submitting any information to the server.

## Clear Field Control

The clear field control allows you to clear the value from a list. The clear field control is available only on some lists.

Click the **X** next to a list to clear the field.

**Figure 2-9 Clear Field Control X**



## Optional Layout Element Toolbar

The optional layout element toolbar appears in the Page Control Area of the GUI.




**Figure 2-10 Optional Layout Element Toolbar**

The toolbar displays different elements depending on which GUI page is selected. The elements of the toolbar that can appear include:

- Filter – Allows you to filter data in a table.
- Errors – Displays errors associated with the work area.
- Info – Displays information messages associated with the work area.
- Status – Displays short status updates associated with the main work area.
- Warning – Displays warnings associated with the work area.

### Notifications

Some messages require immediate attention, such as errors and status items. When new errors occur, the Errors element opens automatically with information about the error. Similarly, when new status items are added, the Status element opens. If you close an automatically opened element, the element stays closed until a new, unacknowledged item is added.

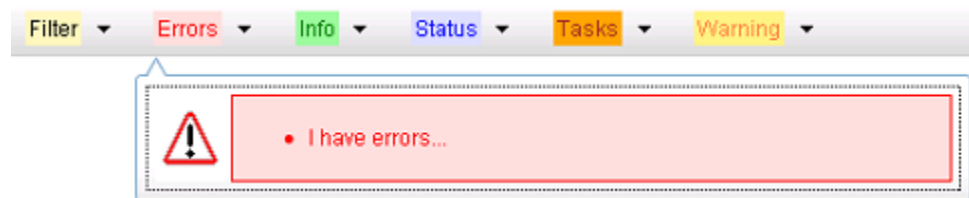**Figure 2-11 Automatic Error Notification**


---

**Note:** Viewing and closing an error does not clear the Errors element. If you reopen the Errors element, previously viewed errors are still in the list.

---

When new messages are added to Warning or Info, the styling of the element changes to indicate new messages are available. The styling of the Task element changes when a task changes state (such as, a task begins or ends).

### Opening an Element in the Toolbar

Use this procedure to open an element in the optional layout element toolbar.

1. Click the text of the element or the triangle icon to open an element.

The selected element opens and overlays the work area.

2. Click X to close the element display.

## Filters

Filters are part of the optional layout element toolbar and appear throughout the GUI in the Page Control Area. For more information about optional layout element toolbar functionality, see [Optional Layout Element Toolbar](#).

Filters allow you to limit the data presented in a table and can specify multiple filter criteria. By default, table rows appear unfiltered. Three types of filters are supported, however, not all filtering options are available on every page. The types of filters supported include:

- Network Element – When enabled, the Network Element filter limits the data viewed to a single Network Element.

---

**Note:** Once enabled, the Network Element filter affect all pages that list or display data relating to the Network Element.

---

- Collection Interval – When enabled, the collection interval filter limits the data to entries collected in a specified time range.
- Display Filter – The display filter limits the data viewed to data matching the specified criteria.

Once a field is selected, it cannot be selected again. All specified criteria must be met in order for a row to be displayed.

The style or format of filters may vary depending on which GUI pages the filters are displayed. Regardless of appearance, filters of the same type function the same.

**Figure 2-12 Examples of Filter Styles**

## Filter Control Elements

This table describes filter control elements of the user interface.

**Table 2-6 Filter Control Elements**

Operator	Description
=	Displays an exact match.
!=	Displays all records that do not match the specified filter parameter value.
>	Displays all records with a parameter value that is greater than the specified value.
>=	Displays all records with a parameter value that is greater than or equal to the specified value.

**Table 2-6 (Cont.) Filter Control Elements**

Operator	Description
<	Displays all records with a parameter value that is less than the specified value.
<=	Displays all records with a parameter value that is less than or equal to the specified value.
Like	Enables you to use an asterisk (*) as a wildcard as part of the filter parameter value.
Is Null	Displays all records that have a value of <b>Is Null</b> in the specified field.

---

**Note:** Not all filterable fields support all operators. Only the supported operators are available for you to select.

---

### Filtering on the Network Element

The global Network Element filter is a special filter that is enabled on a per-user basis. The global Network Element filter allows a user to limit the data viewed to a single Network Element. Once enabled, the global Network Element filter affects all sub-screens that display data related to Network Elements. This filtering option may not be available on all pages.

1. Click **Filter** in the optional layout element toolbar.
2. Select a Network Element from the **Network Element** list.
3. Click **Go** to filter on the selection or click **Reset** to clear the selection.
4. For data tables that support compound filtering, click **Add** to add another filter condition and repeat steps 2 through 4.

Multiple filter conditions are joined by an AND operator.

Records are displayed according to the specified criteria.

### Filtering on Collection Interval

The Collection Interval filter allows a user to limit the data viewed to a specified time interval. This filtering option may not be available on all pages.

1. Click **Filter** in the optional layout element toolbar.
2. Enter a duration for the **Collection Interval** filter.

The duration must be a numeric value.

3. Select a unit of time from the list.

The unit of time can be seconds, minutes, hours, or days.

4. Select **Beginning** or **Ending** from the list.

5. Click **Go** to filter on the selection, or click **Reset** to clear the selection.

Records are displayed according to the specified criteria.

### Filtering Using the Display Filter

Use this procedure to perform a filtering operation. This procedure assumes you have a data table displayed on your screen with the Display Filter field. This process is the same for all data tables. However, all filtering operations are not available for all tables.

---

**Note:** Display Filter does not support compound filtering. For example, you cannot filter on both severity and a server name. Try to filter on a single filter criteria, such as the server hostname for server-scoped metric cells; or the application name for St- and NE-scoped metric cells. You can also sort by congestion level (descending) to help improve your filter.

---

1. Click **Filter** in the optional layout element toolbar.
2. Select a field name from the **Display Filter** list.

This selection specifies the field in the table that you want to filter on. The default is **None**, which indicates that you want all available data displayed.

3. Select an operator from the operation selector list.
4. Enter a value in the value field.

This value specifies the data that you want to filter on. For example, if you specify Filter=Severity with the equals (=) operator and a value of MINOR, the table would show only records where Severity=MINOR.

5. Click **Go** to filter on the selection, or click **Reset** to clear the selection.

Records are displayed according to the specified criteria.

---

**Note:** PCA was known as PDRA and may still be seen in some filtering.

---

## Pause Updates

Some pages refresh automatically. Updates to these pages can be paused by selecting the **Pause updates** checkbox. Uncheck the **Pause updates** checkbox to resume automatic updates. The **Pause updates** checkbox is available only on some pages.

## Max Records Per Page Controls

Max Records Per Page is used to control the maximum number of records displayed in the page area. If a page uses pagination, the value of Max Records Per Page is used. Use this procedure to change the Max Records Per Page.

1. From the **Main Menu**, click **Administration > General Options**.
2. Change the value of the **MaxRecordsPerPage** variable.

---

**Note:** **Maximum Records Per Page** has a range of values from 10 to 100 records. The default value is 20.

---

3. Click **OK** or **Apply**.

**OK** saves the change and returns to the previous page.

**Apply** saves the change and remains on the same page.

The maximum number of records displayed is changed.



---

## Diameter Common on the NOAM

The Diameter Common GUI pages on the NOAM can be used for configuration of the DSR Dashboard, MCCMNC, MCCMNC Mapping Network Identifiers, as well as Bulk Import and Export functions.

### Overview

The Diameter Common menu items on the NOAM provide access to GUI pages to perform the following tasks:

- Configure **Diameter Common > Dashboard > Dashboard** (see [Dashboard](#))
- Configure **Diameter Common > Dashboard > Configuration > Metric Groups** (see [Metric Groups](#))
- Configure **Diameter Common > Dashboard > Configuration > Metric Threshold Configuration Sets** (see [Metric Threshold Configuration Sets](#))
- Configure **Diameter Common > Dashboard > Configuration > Dashboard Network Elements** [Dashboard Network Elements](#))
- Configure **Diameter Common > Dashboard > Configuration > Dashboard Networks** (see [Dashboard Networks](#))
- Configure **Diameter Common > Network Identifiers > MCCMNC** (see [MCCMNC Configuration](#))
- Configure **Diameter Common > Network Identifiers > MCCMNC Mapping** (see [MCCMNC Mapping Configuration](#))
- Configure **Diameter Common > Common Application Options** (see [Common Application Options](#)).
- Perform DSR Bulk Import/Export operations (see [Diameter Common Bulk Import and Export](#))

### Dashboard

Depending on your system, the dashboard differs.

- [Dashboard on the NOAM](#)
- [Dashboard on the SOAM](#)

#### Dashboard on the NOAM

The Dashboard on the NOAM is viewed at **Diameter Common > Dashboard**.

The Dashboard provides high level Metrics, which provide an overall view of the health of one or more Network Elements (NEs) of a network, making Metrics the core component of the DSR Dashboard. Each column on the Dashboard contains the set of values for a particular Metric. The selection of which Metrics are displayed on the Dashboard is done via configuration.

The NOAM Dashboard shows both Network summary and NE summary Metrics.

The order that Metric Groups are displayed on the Dashboard is determined from configuration which cannot be modified. The order that Metrics are displayed within a Metric Group on the Dashboard display is determined from configuration which cannot be modified. Metrics selected for display on the Dashboard via configuration can be hidden/viewed via a Dashboard GUI control based on threshold level filters. A threshold level filter is used to limit which Metrics are displayed on the Dashboard based on a severity value. These limits are valuable because they focus on more potentially significant problems.

Horizontal and vertical scrolling allows any Metrics which do not fit onto a single physical screen to be seen.

The Dashboard also facilitates troubleshooting via Metric-specific hyperlinks on the Dashboard to assist in viewing more detailed information via existing DSR status and maintenance screens. The linkage between content on the Dashboard to DSR status and maintenance screens will be determined from configuration which cannot be modified.

Per Network Metrics are derived from per-NE summary Metrics. A Network is the set of one or more Dashboard Network Elements. The formula for calculating a Network Metric value is identical to that for calculating the per-NE Metric for that Metric.

### **Dashboard on the SOAM**

The SOAM Dashboard shows the NE's summary Metrics, its per-Server Type summary Metrics and its per-Server Metrics.

A Server Type physically groups Metrics associated with a particular type of Server (e.g., DA-MP) onto the Dashboard display in order to create summary Metrics for Servers of a similar type. The order of Server Types on the SOAM Dashboard is determined from configuration which cannot be modified. The Server Types are predefined and cannot be modified. The DA-MP, SS7-MP, DSR, SBR, and SOAM Server Types are supported.

Server Metrics are maintained by each MP. Per-Server Metric values are periodically pushed to their local SOAM, where they are displayed on the SOAM Dashboard display.

Server Type Metrics show a roll-up of Server Metrics by Server type. The formula for calculating a Server Type Metric value is identical to that for calculating the per-NE Metric for that Metric.

Network Element (NE) Metrics are derived from per-Server Metrics. A Network Element is the set of servers managed by a SOAM. The formula for calculating a per-NE Metric value is Metric-specific although, in general, most NE Metrics are the sum of the per-Server Metrics. The set of servers which are managed by a SOAM is determined through standard NOAM configuration and cannot be modified via Dashboard configuration. An NOAM can manage up to 32 NEs.

## **Metric Groups**

The **Diameter Common > Dashboard > Configuration > Metric Groups** page allows Dashboard Metric Groups to be configured.



A Metric Group establishes a collection of Metrics onto the Dashboard display and creates an aggregation status for a group of metrics. The "status" of a Metric Group is the worst-case status of the metrics within that group.

The name of a Metric Group is determined from configuration which cannot (initially) be modified.

The assignment of a Metric to a Metric Group is determined from configuration which cannot (initially) be modified.

The fields are described in [Metric Groups elements](#).

### Metric Groups elements

[Table 3-1](#) describes the fields on the **Diameter Common > Dashboard > Configuration > Metric Groups [Edit]** page.

**Table 3-1 Metric Groups Elements**

Field (* indicates a required field)	Value	Description
*Metric Group Name	Format: Text Box	Name of the Metric Group. Metric Group names are not user-configurable.

Each Metric Group has its own unique metrics. To see the specific metrics within a particular Metric Group, click the +. Once expanded, the list of Metric Names also shows whether or not a given metric is displayed on the Dashboard.

For metrics to be displayed on the Dashboard, the metrics must be selected to do so. To select which metrics are displayed on the Dashboard, select a Metric Group and click **Edit**

### Address Resolution Metrics elements

After selecting the Address Resolution Metric Group and clicking **Edit** on the **Diameter Common > Dashboard > Configuration > Metric Groups** page, the **Diameter Common > Dashboard > Configuration > Metric Groups [Edit]** page appears. [Table 3-2](#) describes the fields for the specific Address Resolution Metrics.

**Table 3-2 Address Resolution Metrics Elements**

Metric Name	Display on Dashboard	Description
# RBAR Cong Instances	Format: Check Box	Total number of <b>RBAR</b> instances in congestion (CL1, CL2, or CL3) across included servers.
RBAR Avg Ing MPS	Format: Check Box	Average RBAR ingress MPS across included DA-MP servers.
RBAR Trans Rej %	Format: Check Box	Percentage of RBAR transactions rejected across included DA-MP servers.
# FABR Cong Instances	Format: Check Box	Total number of <b>FABR</b> instances in congestion (CL1, CL2, or CL3) across included servers.
FABR Avg Ing MPS	Format: Check Box	Average FABR ingress MPS across included DA-MP servers.

**Table 3-2 (Cont.) Address Resolution Metrics Elements**

Metric Name	Display on Dashboard	Description
FABR Trans Rej %	Format: Check Box	Percentage of FABR transactions rejected across included DA-MP servers.

### Alarms Metrics elements

After selecting the Alarms Metric Group and clicking **Edit** on the **Diameter Common > Dashboard > Configuration > Metric Groups** page, the **Diameter Common > Dashboard > Configuration > Metric Groups [Edit]** page appears. [Table 3-3](#) describes the fields for the specific Alarms Metrics.

**Table 3-3 Alarms Metrics Elements**

Metric Name	Display on Dashboard	Description
# Critical Alarms	Format: Check Box	The total number of critical alarms currently being reported by all associated servers.
# Major Alarms	Format: Check Box	The total number of major alarms currently being reported by all associated servers.
# Minor Alarms	Format: Check Box	The total number of minor alarms currently being reported by all associated servers.

### Connections Metrics elements

After selecting the Diameter Connections Metric Group and clicking **Edit** on the **Diameter Common > Dashboard > Configuration > Metric Groups** page, the **Diameter Common > Dashboard > Configuration > Metric Groups [Edit]** page appears. [Table 3-4](#) describes the fields for the specific Diameter Connections Metrics.

**Table 3-4 Connections Metrics Elements**

Metric Name	Display on Dashboard	Description
# Fixed Conns Unavail	Format: Check Box	Total number of fixed connections (Diameter or RADIUS) enabled, but unavailable, across included DA-MPs
# IPFE Conns Unavail	Format: Check Box	Total number of IPFE Diameter connections enabled, but unavailable, across included DA-MPs
# Conns Egress Cong	Format: Check Box	Total number of connections (Diameter or RADIUS) that are experiencing egress congestion, across included DA-MPs
# Conns Ingress Cong	Format: Check Box	Total number of connections (Diameter or RADIUS) that are experiencing ingress congestion, across included DA-MPs

**Table 3-4 (Cont.) Connections Metrics Elements**

<b>Metric Name</b>	<b>Display on Dashboard</b>	<b>Description</b>
# Peer Nodes Unavail	Format: Check Box	Total number of Peer Nodes unavailable, across included DA-MPs
# Peer Nodes Degraded	Format: Check Box	Total number of Peer Nodes degraded, across included DA-MPs
# Route Lists Unavail	Format: Check Box	Total number of Route Lists unavailable, across included DA-MPs
# Route Lists Degraded	Format: Check Box	Total number of Route Lists degraded, across included DA-MPs
# PTL ETGs Degraded	Format: Check Box	Total number of Pending Transaction Limiting Egress Throttle Groups Degraded, across included DA-MPs
# RL ETGs Degraded	Format: Check Box	Total number of Rate Limiting Egress Throttle Groups Degraded, across included DA-MPs
# TTPs with Loss more than zero percent loss	Format: Check Box	Total number of TTPs with Loss more than zero percent loss, across included DA-MPs
# TTPs with Loss more than Threshold	Format: Check Box	Total number of TTPs with Loss more than Threshold, across included DA-MPs, across included DA-MPs
# TTGs with Loss more than zero percent loss metric	Format: Check Box	Total number of TTGs with Loss more than zero percent loss metric, across included DA-MPs.

### MAP Interworking Metrics elements

After selecting the MAP Interworking Metric Group and clicking **Edit** on the **Diameter Common > Dashboard > Configuration > Metric Groups** page, the **Diameter Common > Dashboard > Configuration > Metric Groups [Edit]** page appears. [Table 3-5](#) describes the fields for the specific MAP Interworking Metrics.

**Table 3-5 MAP Interworking Metrics Elements**

<b>Metric Name</b>	<b>Display on Dashboard</b>	<b>Description</b>
# DMIWF Cong Instances	Format: Check Box	Total number of DMIWF instances in congestion (CL1, CL2, or CL3) across included servers
DMIWF Avg Ing MPS	Format: Check Box	Average DMIWF ingress MPS across included DA-MP servers
DMIWF Trans Rej %	Format: Check Box	Percentage of DMIWF transactions rejected across included DA-MP servers
# MDIWF Cong Instances	Format: Check Box	Total number of MDIWF instances in congestion (CL1, CL2, or CL3) across included servers

**Table 3-5 (Cont.) MAP Interworking Metrics Elements**

Metric Name	Display on Dashboard	Description
MDIWF Avg Ing MPS	Format: Check Box	Average MDIWF ingress MPS across included SS7-MP servers
MDIWF Trans Rej %	Format: Check Box	Percentage of MDIWF transactions rejected across included SS7-MP servers
# SS7 Links Down	Format: Check Box	Total number of SS7 links enabled, but down, across included SS7-MPs
# SS7 Link Sets Down	Format: Check Box	Total number of SS7 link sets down across included SS7-MPs
# SS7 MTP3 Users Unavail	Format: Check Box	Total number of SS7 MTP3 remote users unavailable across included SS7-MPs
# SS7 Rmt Sig Pts Unavail	Format: Check Box	Total number of SS7 MTP3 remote signaling points unavailable across included SS7-MPs

### Policy & Charging Metrics elements

After selecting the Policy & Charging Metric Group and clicking **Edit** on the **Diameter Common > Dashboard > Configuration > Metric Groups** page, the **Diameter Common > Dashboard > Configuration > Metric Groups [Edit]** page appears. [Table 3-6](#) describes the fields for the specific Policy and Charging Metrics.

**Table 3-6 Policy & Charging Metrics Elements**

Metric Name	Display on Dashboard	Description
# PCA Cong Instances	Format: Check Box	Total number of PCA instances in congestion (CL1, CL2, or CL3) across included servers
PCA Avg Ing MPS	Format: Check Box	Average PCA ingress MPS across included DA-MP servers
PCA Trans Rej %	Format: Check Box	Percentage of PCA transactions rejected across included DA-MP servers
# GLA Cong Instances	Format: Check Box	Total number of GLA instances in congestion (CL1, CL2, or CL3) across included servers
GLA Avg Ing MPS	Format: Check Box	Average GLA ingress MPS across included DA-MP servers
GLA Trans Rej %	Format: Check Box	Percentage of GLA transactions rejected across included DA-MP server

### Priority Service Metrics elements

After selecting the Priority Service Metric Group and clicking **Edit** on the **Diameter Common > Dashboard > Configuration > Metric Groups** page, the **Diameter Common > Dashboard > Configuration > Metric Groups [Edit]** page appears. [Table 3-7](#) describes the fields for the specific Priority Service Metrics.

**Table 3-7 Priority Service Metrics Elements**

Metric Name	Display on Dashboard	Description
NGN-PS Offered Rate	Format: Check Box	Rate of NGN-PS messages received from DSR peers
NGN-PS Transaction Pass %	Format: Check Box	Ratio of number of 2xx NGN-PS Answers sent to Peer/Number of NGN-PS messages Accepted by DSR
NGN-PS Transaction Fail Peers %	Format: Check Box	Ratio of number of non-2xx NGN-PS Answers received from Peer/Number of NGN-PS messages Accepted by DSR

**Protocol Metrics elements**

After selecting the Protocol Metric Group and clicking the **Edit** on the **Diameter Common > Dashboard > Configuration > Metric Groups** page, the **Diameter Common > Dashboard > Configuration > Metric Groups [Edit]** page appears. [Table 3-8](#) describes the fields for the specific Protocol Metrics.

**Table 3-8 Protocol Metrics elements**

Metric Name	Display on Dashboard	Description
Avg D2D Trans Hold Tm	Format: Check Box	Average Diameter-to-Diameter Transaction Hold Time across included DA-MPs (ms)
Avg D2M Trans Hold TM	Format: Check Box	Average Diameter-to-MAP Transaction Hold Time across included SS7-MPs (ms)
Avg M2D Trans Hold Tm	Format: Check Box	Average MAP-to-Diameter Transaction Hold Time across included SS7-MPs (ms)
Success Trans %	Format: Check Box	Percentage of transactions completed successfully across included servers
Ext Node Rej %	Format: Check Box	Percentage of transactions rejected by external signaling nodes
Egress Answer Tmout %	Format: Check Box	Percentage of egress transactions with answer timeout
Orphan Answer %	Format: Check Box	Percentage of orphan answers detected across included servers

**RADIUS Metrics elements**

After selecting the Servers Metric Group and clicking **Edit** on the **Diameter Common > Dashboard > Configuration > Metric Groups** page, the **Diameter Common > Dashboard > Configuration > Metric Groups [Edit]** page appears. [Table 3-9](#) describes the fields for the specific RADIUS Metrics.

**Table 3-9 RADIUS Metrics Elements**

Metric Name	Display on Dashboard	Description
Avg RADIUS MPS	Format: Check Box	Average RADIUS MPS across included DA-MP servers
Avg RD-IWF MPS	Format: Check Box	Average RD-IWF MPS across included DA-MP servers

**Servers Metrics elements**

After selecting the Servers Metric Group and clicking **Edit** on the **Diameter Common > Dashboard > Configuration > Metric Groups** page, the **Diameter Common > Dashboard > Configuration > Metric Groups [Edit]** page appears. [Table 3-10](#) describes the fields for the specific Servers Metrics.

**Table 3-10 Servers Metrics Elements**

Metric Name	Display on Dashboard	Description
# Servers Unavail	Format: Check Box	The total number of associated servers administratively enabled, but not reporting status data
# Servers Exc Mem Thr	Format: Check Box	The total number of servers whose memory usage exceeds any defined threshold
# Servers Exc CPU Thr	Format: Check Box	The total number of servers whose CPU usage exceeds any defined threshold
# Servers Exc Proc Rate Thr	Format: Check Box	The total number of servers whose processing rate usage exceeds any defined threshold
# Servers Stack Congested	Format: Check Box	The total number of servers whose stack is in congestion (CL1, CL2, or CL3)
DA-MP Ingress MPS	Format: Check Box	Total ingress MPS across included DA-MP servers
SS7-MP Ingress MPS	Format: Check Box	Total ingress MPS across included SS7-MP servers
IPFE Ingress Pkts/sec	Format: Check Box	Total ingress packets per second across included IPFE servers
IPFE Ingress MB/sec	Format: Check Box	Total ingress MB per second across included IPFE servers
SBR Ingress Events/sec	Format: Check Box	Total ingress events per second across included SBR servers
SBR Sessions	Format: Check Box	Total sessions across included SBR servers
SBR Bindings	Format: Check Box	Total bindings across included SBR servers

## Metric Threshold Configuration Sets

The **Diameter Common > Dashboard > Configuration > Metric Threshold Configuration Sets** page allows Dashboard Metric Threshold Configuration Sets to be configured.

A Metric Threshold Configuration Set (MTCfgSet) contains all the information defining up to three thresholds for every configured metric. MTCfgSets have two types - Server Thresholds and Summary Thresholds.

The Server Metric Threshold Configuration Set contains thresholds applied only at Server scope. Server Type thresholds cannot be edited, but can be viewed on the Server Type tab of the **Diameter Common > Dashboard > Configuration > Metric Threshold Configuration Sets** page.

Summary Metric Threshold Configuration Sets can apply at Dashboard Network Element or Dashboard Network scope. These thresholds can be configured and viewed on the Summary Type tab of the **Diameter Common > Dashboard > Configuration > Metric Threshold Configuration Sets** page.

Metric thresholds allow for visualization enhancements on the Dashboard. Visualization enhancements such as coloring are used on the Dashboard to attract attention to a potential problem. When a visual enhancement on the Dashboard is enabled when a user-defined threshold is exceeded, potential problems can be investigated by the inspection of additional information.

Metric thresholds are only used for Dashboard visualization enhancements and are not associated with alarms. Most (but not necessarily all) metrics have thresholds. Whether a Metric can be assigned thresholds is determined from configuration, which cannot be modified.

For information on how to create or edit a Metric Threshold Configuration Set, refer to [Inserting a Summary Metric Threshold Configuration Set](#) and [Editing a Summary Metric Threshold Configuration Set](#).

### Metric Threshold Configuration Sets elements

[Table 3-11](#) describes the elements on the **Diameter Common > Dashboard > Configuration > Metric Threshold Configuration Sets [Insert]** and **Diameter Common > Dashboard > Configuration > Metric Threshold Configuration Sets [Edit]** pages on the NOAM.

**Table 3-11 Metric Threshold Configuration Sets Elements**

Field (* Indicates Required Field)	Description	Data Input Notes
*Metric Threshold Configuration Set Name	A name that uniquely identifies the Metric Threshold Configuration Set	Format: Text box Default: N/A Range: A 32-character string. Valid characters are alphanumeric and underscore. Must contain at least one alpha and must not start with a digit.
Type	Summary type applies to Metrics at Network Element and Network scopes. Server type applies to Metrics at Server scope.	Format: Radio button Default: Summary Range: N/A

**Table 3-12 Metric Threshold Elements**

Metric Name	Metric Description	Data Input Notes
Alarms Metric Group		
# Critical Alarms	The total number of critical alarms currently being reported by all associated servers.	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
# Major Alarms	The total number of major alarms currently being reported by all associated servers.	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
# Minor Alarms	The total number of minor alarms currently being reported by all associated servers.	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
Servers Metric Group		
# Servers Unavail	The total number of associated servers administratively enabled, but not reporting status data	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
# Servers Exc Mem Thr	The total number of servers whose memory usage exceeds any defined threshold	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
# Servers Exc CPU Thr	The total number of servers whose CPU usage exceeds any defined threshold	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
# Servers Exc Proc Rate Thr	The total number of servers whose processing rate usage exceeds any defined threshold	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
# Servers Stack Congested	The total number of servers whose stack is in congestion (CL1, CL2, or CL3)	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
DA-MP Ingress MPS	Total ingress MPS across included DA-MP servers	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer



**Table 3-12 (Cont.) Metric Threshold Elements**

<b>Metric Name</b>	<b>Metric Description</b>	<b>Data Input Notes</b>
SS7-MP Ingress MPS	Total ingress MPS across included SS7-MP servers	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
IPFE Ingress Pkts/sec	Total ingress packets per second across included IPFE servers	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
IPFE Ingress MB/sec	Total ingress MB per second across included IPFE servers	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
SBR Ingress Events/sec	Total ingress events per second across included SBR servers	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
SBR Sessions	Total sessions across included SBR servers	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
SBR Bindings	Total bindings across included SBR servers	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
Protocol Metric Group		
Avg D2D Trans Hold Tm	Average Diameter-Diameter Transaction Hold Time across included DA-MPs (ms)	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
Avg D2M Trans Hold TM	Average Diameter-to-MAP Transaction Hold Time across included SS7-MPs (ms)	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
Avg M2D Trans Hold Tm	Average MAP-to-Diameter Transaction Hold Time across included SS7-MPs (ms)	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
Success Trans %	Percentage of transactions completed successfully across included servers	Format: Text box Default: N/A Range: 0-100. Must be an integer

**Table 3-12 (Cont.) Metric Threshold Elements**

Metric Name	Metric Description	Data Input Notes
Ext Node Rej %	Percentage of transactions rejected by external signaling nodes	Format: Text box Default: N/A Range: 0-100. Must be an integer
Egress Answer Tmout %	Percentage of egress transactions with answer timeout	Format: Text box Default: N/A Range: 0-100. Must be an integer
Orphan Answer %	Percentage of orphan answers detected across included servers	Format: Text box Default: N/A Range: 0-100. Must be an integer
Diameter Connections Metric Group		
# Fixed Diam Conns Unavail	Total number of fixed Diameter connections enabled, but unavailable, across included DA-MPs	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
# IPFE Conns Unavail	Total number of IPFE Diameter connections enabled, but unavailable, across included DA-MPs	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
# Diam Conns Egress Cong	Total number of Diameter connections that are experiencing egress congestion, across included DA-MPs	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
# Diam Conns Ingress Cong	Total number of Diameter connections that are experiencing ingress congestion, across included DA-MPs	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
# Peer Nodes Unavail	Total number of Peer Nodes unavailable, across included DA-MPs	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
# Peer Nodes Degraded	Total number of Peer Nodes degraded, across included DA-MPs	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
# Route Lists Unavail	Total number of Route Lists unavailable, across included DA-MPs	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer

**Table 3-12 (Cont.) Metric Threshold Elements**

<b>Metric Name</b>	<b>Metric Description</b>	<b>Data Input Notes</b>
# Route Lists Degraded	Total number of Route Lists degraded, across included DA-MPs	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
# PTL ETGs Degraded	Total number of Pending Transaction Limiting Egress Throttle Groups Degraded, across included DA-MPs	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
# RL ETGs Degraded	Total number of Rate Limiting Egress Throttle Groups Degraded, across included DA-MPs	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
Policy & Charging Metric Group		
# PCA Cong Instances	Total number of PCA instances in congestion (CL1, CL2, or CL3) across included servers	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
PCA Avg Ing MPS	Average PCA ingress MPS across included DA-MP servers	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
PCA Trans Rej %	Percentage of PCA transactions rejected across included DA-MP servers	Format: Text box Default: N/A Range: 0-100. Must be an integer
# GLA Cong Instances	Total number of GLA instances in congestion (CL1, CL2, or CL3) across included servers	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
GLA Avg Ing MPS	Average GLA ingress MPS across included DA-MP servers	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
GLA Trans Rej %	Percentage of GLA transactions rejected across included DA-MP servers	Format: Text box Default: N/A Range: 0-100. Must be an integer
Address Resolution Metric Group		
# RBAR Cong Instances	Total number of RBAR instances in congestion (CL1, CL2, or CL3) across included servers	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer

**Table 3-12 (Cont.) Metric Threshold Elements**

<b>Metric Name</b>	<b>Metric Description</b>	<b>Data Input Notes</b>
RBAR Avg Ing MPS	Average RBAR ingress MPS across included DA-MP servers	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
RBAR Trans Rej %	Percentage of RBAR transactions rejected across included DA-MP servers	Format: Text box Default: N/A Range: 0-100. Must be an integer
# FABR Cong Instances	Total number of FABR instance in congestion (CL1, CL2, or CL3) across included servers	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
FABR Avg Ing MPS	Average FABR ingress MPS across included DA-MP servers	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
FABR Trans Rej %	Percentage of FABR transactions rejected across included DA-MP servers	Format: Text box Default: N/A Range: 0-100. Must be an integer
MAP Interworking Metric Group		
# DMIWF Cong Instances	Total number of DMIWF instances in congestion (CL1, CL2, or CL3) across included servers	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
DMIWF Avg Ing MPS	Average DMIWF ingress MPS across included DA-MP servers	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
DMIWF Trans Rej %	Percentage of DMIWF transactions rejected across included DA-MP servers	Format: Text box Default: N/A Range: 0-100. Must be an integer
# MDIWF Cong Instances	Total number of MDIWF instances in congestion (CL1, CL2, or CL3) across included servers	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer
MDIWF Avg Ing MPS	Average MDIWF ingress MPS across included SS7-MP servers	Format: Text box Default: N/A Range: 0-9999999999999999. Must be an integer

**Table 3-12 (Cont.) Metric Threshold Elements**

<b>Metric Name</b>	<b>Metric Description</b>	<b>Data Input Notes</b>
MDIWF Trans Rej %	Percentage of MDIWF transactions rejected across included SS7-MP servers	Format: Text box Default: N/A Range: 0-100. Must be an integer
# SS7 Links Down	Total number of SS7 links enabled, but down, across included SS7-MPs	Format: Text box Default: N/A Range: 0-999999999999999. Must be an integer
# SS7 Link Sets Down	Total number of SS7 link sets down across included SS7-MPs	Format: Text box Default: N/A Range: 0-999999999999999. Must be an integer
# SS7 MTP3 Users Unavail	Total number of SS7 MTP3 remote users unavailable across included SS7-MPs	Format: Text box Default: N/A Range: 0-999999999999999. Must be an integer
# SS7 Rmt Sig Pts Unavail	Total number of SS7 MTP3 remote signaling points unavailable across included SS7-MPs	Format: Text box Default: N/A Range: 0-999999999999999. Must be an integer

### Inserting a Summary Metric Threshold Configuration Set

1. On the Summary tab of the **Diameter Common > Dashboard > Configuration > Metric Threshold Configuration Sets** page, click **Insert** to insert a new Summary Metric Threshold Configuration Set.
2. Fill in the fields on the **Diameter Common > Dashboard > Configuration > Metric Threshold Configuration Sets [Insert]** page.

The fields are described in [Metric Threshold Configuration Sets elements](#).

### Editing a Summary Metric Threshold Configuration Set

1. On the Summary tab of the **Diameter Common > Dashboard > Configuration > Metric Threshold Configuration Sets** page, click **Edit** to edit a Summary Metric Threshold Configuration Set.
2. Fill in the fields on the **Diameter Common > Dashboard > Configuration > Metric Threshold Configuration Sets [Edit]** page.

The fields are described in [Metric Threshold Configuration Sets elements](#).

### Deleting a Metric Threshold Configuration Set

Use this task to delete a Metric Threshold Configuration Set.

1. From the NOAM, select **Diameter Common > Dashboard > Configuration > Metric Threshold Configuration Sets**.

2. Select the Metric Threshold Configuration Set Name you want to delete.
3. Click **Delete**.
4. Click **OK** or **Cancel**.

## Dashboard Network Elements

The **Diameter Common > Dashboard > Configuration > Dashboard Network Elements** page allows Dashboard Network Elements to be configured.

A Dashboard Network Element contains all the information that defines a view into a single DSR site/Network Element (i.e., an SOAM Server Group and its subtending servers). Each Server Group within a site is associated with the Dashboard Network Element for that site.

Up to 32 Dashboard NEs are supported.

The fields are described in [Dashboard Network Elements elements](#).

For information on how to create or edit a Dashboard Network Element, refer to [Inserting a Dashboard Network Element](#) and [Editing a Dashboard Network Element](#).

### Dashboard Network Elements elements

[Table 3-13](#) describes the elements on the **Diameter Common > Dashboard > Configuration > Dashboard Network Elements [Insert]** and **Diameter Common > Dashboard > Configuration > Dashboard Network Elements [Edit]** pages on the NOAM.

**Table 3-13** *Dashboard Network Elements Elements*

Field (* Indicates Required Field)	Description	Data Input Notes
*Network Element	A name that uniquely identifies the Dashboard Network Element	Format: Pull down list Default: N/A Range: A 32-character string. Valid characters are alphanumeric and underscore. Must contain at least one alpha and must not start with a digit.
Server Metric Threshold Configuration Set	The Server Metric Threshold Configuration Set used to determine Dashboard screen cell colorization of the Server-scoped Metric values in this Dashboard Network Element.	Format: Pull down list
<hr/> <b>Note:</b> Selection is optional. <hr/>		

**Table 3-13 (Cont.) Dashboard Network Elements Elements**

Field (* Indicates Required Field)	Description	Data Input Notes
Summary Metric Threshold Configuration Set	The Summary Metric Threshold Configuration Set used to determine Dashboard screen cell colorization of this Dashboard Network Element's Metric values.	Format: Pull down list
<hr/> <b>Note:</b> Selection is optional. <hr/>		
Display Administratively Disabled Servers	When checked, servers that are administratively disabled will be displayed on the SOAM Dashboard screen.	Format: Check box

### Inserting a Dashboard Network Element

1. To insert a new Dashboard, click **Insert**.
2. Fill in the fields on the **Diameter Common > Dashboard > Configuration > Dashboard Network Elements [Insert]** page.

The fields are described in [Dashboard Network Elements elements](#).

### Editing a Dashboard Network Element

1. To insert a new Dashboard, click **Edit**.
2. Fill in the fields on the **Diameter Common > Dashboard > Configuration > Dashboard Network Elements [Edit]** page.

The fields are described in [Dashboard Network Elements elements](#).

### Deleting a Dashboard Network Element

Use this task to delete a Dashboard Network Element.

1. Click **Diameter Common > Dashboard > Configuration > Dashboard Network Element**.
2. Select the Dashboard Network Element Name you want to delete.
3. Click **Delete**.
4. Click **OK** or **Cancel**.

## Dashboard Networks

The **Diameter Common > Dashboard > Configuration > Dashboard Networks** page allows Dashboard Networks to be configured.

A Dashboard Network is a set of Dashboard Network Elements, Metrics, and associated Network Metric Thresholds that is created by configuration defines the content and thresholds of a NOAM Dashboard display.

The set of Dashboard Network Elements assigned to Dashboard Network is determined from configuration and cannot be modified. Only one Dashboard Network is supported.

The fields are described in [Dashboard Networks elements](#).

### Dashboard Networks elements

[Table 3-14](#) describes the elements on the **Diameter Common > Dashboard > Configuration > Dashboard Networks** page.

**Table 3-14 Dashboard Networks Elements**

Field	Description	Data Input Notes
Dashboard Network Name	Name of the Dashboard Network	Format: Text box
	<b>Note:</b> The Dashboard Network name is not user-configurable.	
Summary Metric Threshold Configuration Set	The Summary Metric Threshold Configuration Set used to determine Dashboard screen cell colorization of this Dashboard Network's Metric values.	Format: Pull down list
Dashboard Network Elements Display Order	The order in which the Dashboard Network Elements will be displayed on the NOAM Dashboard screen. To display a Dashboard Network, move it to the lower list. Use the up and down arrows next to the lower list to set the order in which the Dashboard Network Elements will be displayed.	Format: Display boxes with navigable buttons

## MCCMNC Configuration

The **Diameter Common > Network Identifiers > MCCMNC** pages are used to configure up to 2500 distinct combinations of Mobile Country Code (MCC) and Mobile Network Code (MNC).

The configured MCCMNC entries can be mapped to Diameter Realms, MSISDN prefix digits, and CC+NDC combinations, using the **Diameter Common > Network Identifiers > MCCMNC Mapping** page (see [MCCMNC Mapping Configuration](#)).

MCCMNC combinations are used by Address resolution applications like Full Address Based Resolution (FABR) and Range Based Address Resolution (RBAR), which need to categorize User Identities (digit strings) decoded from the Diameter Request AVPs as either MSISDN or IMSI, to allow looking up the User Identity in the appropriate lookup table.

Most of the time, these applications can clearly categorize the decoded User Identity based on:

- The configured Routing Entity Type
- The contents of the AVP



For instance, if the User Identity has been decoded from a SIP URI that has a "+" sign before the digits (such as sig:+1-919-460-5500@oracle.com), it can be directly categorized as an MSISDN.

- The number of digits in the User Identity

In certain cases, none of these methods allow a clear categorization (for example, if the number of digits needs to be used and the received number of digits are applicable to both IMSIs and MSISDNs, and thus leads to an ambiguous determination; or if there is no "+" sign before the digits). In such cases, a tie breaker procedure is required to categorize the digits as an IMSI or an MSISDN. The configured MCCMNC combinations can be used to provide a tie breaker mechanism in such cases, as follows:

- If FABR has been configured to decode an IMPU from a User Identity (digit string) but cannot determine whether the User Identity is an IMSI or an MSISDN based on digit analysis, FABR needs a tie breaker to categorize the User Identity properly.

FABR extracts the first 5 or 6 digits of the User Identity and compares them against the list of configured 5-digit and 6-digit MCC-MNC combinations on the **Diameter Common > Network Identifiers > MCCMNC** page.

If a match occurs, the User Identity is considered to be an IMSI and is used for an IMSI lookup.

If a match does not occur, the User Identity is considered to be an MSISDN and is used for an MSISDN lookup.

- If RBAR has been configured to decode an IMPU/MSISDN from a User Identity (digit string) but cannot determine whether the User Identity is an IMSI or an MSISDN based on digit analysis, RBAR needs a tie breaker to categorize the user identity properly.

RBAR extracts the first 5 or 6 digits of the User Identity and compares them against the list of configured 5-digit and 6-digit MCC-MNC combinations on the **Diameter Common > Network Identifiers > MCCMNC** page.

If a match occurs, the User Identity is considered to be an IMSI. RBAR will bypass the AVP; as RBAR does not support decoding an IMSI from a Routing Entity of IMPU or MSISDN.

If a match does not occur, the User Identity is considered to be an MSISDN and is used for MSISDN lookup.

As described in [MCCMNC Mapping Configuration](#), MCCMNC combinations and MCCMNC Mapping are used by:

- The MAP-Diameter Interworking Function to translate a Diameter Request message to a MAP Request message (ITU) or a MAP Request message to a Diameter Request message.
- Diameter Mediation to populate the Destination-Realm AVP based on the IMSI value present in a Request message.

On the **Diameter Common > Network Identifiers > MCCMNC** page, you can perform the following actions:

- Filter the list of entries, to display only the desired entries.

- Sort the list entries in ascending or descending order by clicking the column heading. By default, the list is sorted by **MCC** and **MNC** in ascending ASCII order.
- Click **Insert**.  
The **Diameter Common > Network Identifiers > MCCMNC [Insert]** page opens. You can add new MCCMNC entries. If the maximum number of MCCMNC entries (2500) already exists in the system, the **Diameter Common > Network Identifiers > MCCMNC [Insert]** page will not open, and an error message is displayed.
- Select an MCCMNC entry in the list, and click **Edit**.  
The **Diameter Common > Network Identifiers > MCCMNC [Edit]** page opens. The selected MCCMNC entry can be edited.
- Select an MCCMNC entry in the list, and click **Delete** to remove the selected entry.

## MCCMNC Elements

[Table 3-15](#) describes the fields on the **Diameter Common > Network Identifiers > MCCMNC** pages.

**Table 3-15** *MCCMNC Elements*

Field (* indicates a required field)	Description	Value
*MCC	Mobile Country Code	Format: Text box; numeric. Valid values are 0-999. Range: 3 digits
*Country Name	Country Name corresponding to the MCC	Format: text box; alphanumeric string Range: Up to 128 characters
*MNC	Mobile Network Code	Format: Text box; numeric. Valid values are 0-999. Range: 2 or 3 digits
*Network Name	Network Name corresponding to the MNC	Format: text box; ASCII printable characters; alphanumeric string. Range: Up to 128 characters.

## Adding MCCMNC Entries

Use this task to configure new **MCCMNC** entries.

**MCCMNC** fields are described in [MCCMNC Elements](#).

- On the NOAM, select **Diameter Common > Network Identifiers > MCCMNC**.

The **Diameter Common > Network Identifiers > MCCMNC** page appears.

- Click **Insert**.

The **Diameter Common > Network Identifiers > MCCMNC [Insert]** page appears.

If the maximum number of **MCCMNC** entries (2500) has already been configured in the system, the **Diameter Common > Network Identifiers > MCCMNC [Insert]** page does not open, and an error message appears.

3. Enter a value for each field.

4. Click:

- **OK** to save the new entry and return to the **Diameter Common > Network Identifiers > MCCMNC** page.
- **Apply** to save the new entry and remain on this page. The data displayed on the page is updated.
- **Cancel** to return to the **Diameter Common > Network Identifiers > MCCMNC** page without saving any changes.

If **OK** or **Apply** is clicked and any of the following conditions exist, an error message appears:

- Any fields contain a value that is out of the allowed range
- Any required field is empty (not entered)
- Adding the new **MCCMNC** entry would cause the allowed maximum number of entries (2500) to be exceeded
- The combination of the **MCC** and **MNC** field values is not unique (already exists)

## Editing MCCMNC Entries

Use this task to change **MCCMNC** entries.

**MCCMNC** fields are described in [MCCMNC Elements](#).

When the **Diameter Common > Network Identifiers > MCCMNC [Edit]** page opens, the fields are populated with the current configured values.

---

**Note:** The **MCC** and **MNC** field values cannot be changed.

---

1. On the NOAM, select **Diameter Common > Network Identifiers > MCCMNC**.

The **Diameter Common > Network Identifiers > MCCMNC** page appears.

2. Select the **MCCMNC** entry to be changed.

3. Click **Edit**.

The **Diameter Common > Network Identifiers > MCCMNC [Edit]** page appears.

4. Edit the fields that need to be changed.

5. Click:

- **OK** to save the changes and return to the **Diameter Common > Network Identifiers > MCCMNC** page.

- **Apply** to save the changes and remain on this page.
- **Cancel** to return to the **Diameter Common > Network Identifiers > MCCMNC** page without saving any changes.

If **OK** or **Apply** is clicked and any of the following conditions exist, an error message appears:

- Any field contains values that are not valid or are out of range
- Any required field is empty (not entered)

## Deleting MCCMNC Entries

Use this task to delete an MCCMNC entry.

1. From the NOAM, select **Diameter Common > Network Identifiers > MCCMNC**.

The **Diameter Common > Network Identifiers > MCCMNC** page appears.

2. Select the **MCCMNC** entry to be deleted.
3. Click **Delete**.
4. Click:

- **OK** to delete the **MCCMNC** entry.
- **Cancel** to cancel the delete function and return to the **Diameter Common > Network Identifiers > MCCMNC** page.

If **OK** is clicked and the selected **MCCMNC** entry no longer exists (it was deleted by another user), an error message is displayed.

## MCCMNC Mapping Configuration

The **Diameter Common > Network Identifiers > MCCMNC Mapping** pages are used to configure mapping of MCC+MNC combinations to Diameter Realms, MSIN prefix digits, and CC+NDC combinations.

The MCC+MNC combinations must first be configured using the **Diameter Common > Network Identifiers > MCCMNC** pages (see [MCCMNC Configuration](#)) before the MCCMNC Mapping configuration is performed.

MCCMNC combinations and MCCMNC Mapping are used by:

- The MAP-Diameter Interworking Function to translate:
  - A Diameter Request message to a MAP Request message (ITU)  
If a Diameter Request message does not contain a Destination Host AVP, but does contain IMSI digits in a User-Name AVP, the MCCMNC Mapping configuration is used to translate the MCC and MNC in the IMSI to the CC and NDC that are populated in the SCCP Called Party Address (CdPA) of the MAP Request. A longest prefix match of IMSI digits (MCC+MNC+prefix digits) is performed.
  - A MAP Request message to a Diameter Request message

If the GTA digits are in IMSI format (for ANSI this occurs if the SCCP CdPA Translation Type is 9, and for ITU this occurs if the SCCP CdPA Numbering Plan is E.212), then the MCCMNC Mapping configuration is used to translate the MCC and MNC in the IMSI to a Diameter Realm.

The Diameter Realm is populated into the Destination-Realm AVP of the Diameter Request message.

- Diameter Mediation to populate the Destination-Realm AVP based on the IMSI value present in a Request message.

Mediation retrieves the IMSI value from one of the following AVPs in the Request:

1. Subscription-ID (Subscription-ID-Type=1)
2. User-Name
  - The first instance of an AVP that contains an IMSI is used.
  - The Mediation Set Diameter Realm Action extracts the MCC and MNC values from the IMSI by prefix matching against the MCCMNC combinations configured on the **Diameter Common > Network Identifiers > MCCMNC** page. The MCC and MNC cannot be extracted from the IMSI if there is no match found on this page.
  - The Destination-Realm AVP is added or populated with the Realm that corresponds to the MCCMNC combination configured on the **Diameter Common > Network Identifiers > MCCMNC Mapping** page.
  - If no Realm is specified for the MCCMNC combination, the Destination-Realm is populated in 3GPP format "epc.mnc<MNC>.mcc<MCC>.3gppnetwork.org", where <MNC> and <MCC> fields correspond to the MNC and MCC values extracted from the AVP containing the IMSI present in the Request.
  - If the Destination-Realm AVP is not present in the message, the Action adds it.

On the **Diameter Common > Network Identifiers > MCCMNC Mapping** page, you can perform the following actions:

- Filter the list of entries, to display only the desired entries.
- Sort the list entries in ascending or descending order by clicking the column heading. By default, the list is sorted by **MCC** and **MNC** in ascending ASCII order.
- Click **Insert**.

The **Diameter Common > Network Identifiers > MCCMNC Mapping [Insert]** page opens. You can add new MCCMNC Mapping entries. If the maximum number of MCCMNC Mapping entries (2500) already exists in the system, the **Diameter Common > Network Identifiers > MCCMNC Mapping [Insert]** page will not open, and an error message is displayed.

- Select an MCCMNC Mapping entry in the list, and click **Edit**.

The **Diameter Common > Network Identifiers > MCCMNC Mapping [Edit]** page opens. The selected MCCMNC Mapping entry can be edited.

- Select an MCCMNC Mapping entry in the list, and click **Delete** to remove the selected entry.

## MCCMNC Mapping Elements

Table 3-16 describes the fields on the **Diameter Common > Network Identifiers > MCCMNC Mapping** pages.

**Table 3-16 MCCMNC Mapping Elements**

Field (* indicates a required field)	Description	Value
*MCCMNC	Country and Network Code.	Format: Pulldown list. Range: Configured MCCMNC entries
Country Name	Country Name corresponding to the MCC.	Read-only field Format: text box; alphanumeric string. Range: Country Name configured for selected MCCMNC entry.
Network Name	Network Name corresponding to the MNC.	Read-only field Format: text box; ASCII printable characters; alphanumeric string. Range: Network Name configured for selected MCCMNC entry.
MSIN Prefix Digits	Optional MSIN prefix digits that form a "MCC+MNC+MSIN prefix digits" string. An empty MSIN prefix digits entry (0 digits) is used to map MCC+MNC to configuration data. If MSIN prefix digits are specified, it maps "MCC+MNC+ MSIN prefix digits" to configuration data.	Format: text box; numeric string. Valid values are 0-9999999999 Range: 0-10 digits Default: Empty string (null)
CCNDC	Optional Country Code (CC) plus National Destination Code (NDC) that is associated with the "MCC+MNC+ optional MSIN Prefix Digits".	Format: text box; numeric string. Valid values are 0-9999999999999999 Range: 0-15 digits Default: Empty string (null)

**Table 3-16 (Cont.) MCCMNC Mapping Elements**

Field (* indicates a required field)	Description	Value
Realm	Diameter Realm that is associated with the "MCC+MNC+ optional MSIN Prefix Digits"	Format: string consisting of a list of labels separated by dots. A label can contain letters, digits, dash (-), and underscore (_). A label must begin with a letter, digit, or underscore, and must end with a letter or digit. Underscore can be used only as the first character.  Range: A valid Realm; Realm - up to 255 characters; label - up to 63 characters
Description	Optional description or note about this entry.	Format: text box Range 0-255 characters

## Adding MCCMNC Mapping Entries

Use this task to configure new **MCCMNC Mapping** entries.

**MCCMNC Mapping** fields are described in [MCCMNC Mapping Elements](#).

1. On the NOAM, select **Diameter Common > Network Identifiers > MCCMNC Mapping**.

The **Diameter Common > Network Identifiers > MCCMNC Mapping** page appears.

2. Click **Insert**.

The **Diameter Common > Network Identifiers > MCCMNC Mapping [Insert]** page appears.

If the maximum number of **MCCMNC** entries (2500) has already been configured in the system, the **Diameter Common > Network Identifiers > MCCMNC Mapping [Insert]** page does not open, and an error message appears.

3. Enter a value for each field.

4. Click:

- **OK** to save the new entry and return to the **Diameter Common > Network Identifiers > MCCMNC Mapping** page.
- **Apply** to save the new entry and remain on this page. The data displayed on the page is updated.
- **Cancel** to return to the **Diameter Common > Network Identifiers > MCCMNC Mapping** page without saving any changes.

If **OK** or **Apply** is clicked and any of the following conditions exist, an error message appears:

- Any fields contain a value that is out of the allowed range
- Any required field is empty (not entered)
- Adding the new **MCCMNC Mapping** entry would cause the allowed maximum number of entries (2500) to be exceeded
- The **MCC+MNC+MSIN Prefix Digits** entry is not unique (already exists)

## Editing MCCMNC Mapping Entries

Use this task to change **MCCMNC Mapping** entries.

**MCCMNC** fields are described in [MCCMNC Mapping Elements](#).

When the **Diameter Common > Network Identifiers > MCCMNC Mapping [Edit]** page opens, the fields are populated with the current configured values.

---

---

**Note:** The **MCC** and **MNC** field values cannot be changed.

---

---

1. On the NOAM, select **Diameter Common > Network Identifiers > MCCMNC Mapping**.

The **Diameter Common > Network Identifiers > MCCMNC Mapping** page appears.

2. Select the **MCCMNC Mapping** entry to be changed.
3. Click **Edit**.

The **Diameter Common > Network Identifiers > MCCMNC Mapping [Edit]** page appears.

4. Change the field values as needed.
5. Click:
  - **OK** to save the changes and return to the **Diameter Common > Network Identifiers > MCCMNC Mapping** page.
  - **Apply** to save the changes and remain on this page.
  - **Cancel** to return to the **Diameter Common > Network Identifiers > MCCMNC Mapping** page without saving any changes.

If **OK** or **Apply** is clicked and any of the following conditions exist, an error message appears:

- Any field contains values that are not valid or are out of range
- Any required field is empty (not entered)

## Deleting MCCMNC Mapping Entries

Use this task to delete an **MCCMNC Mapping** entry.

1. On the NOAM, select **Diameter Common > Network Identifiers > MCCMNC Mapping**.



The **Diameter Common > Network Identifiers > MCCMNC Mapping** page appears.

2. Select the **MCCMNC Mapping** entry to be deleted.

3. Click **Delete**.

A popup window appears to confirm the delete.

4. Click:

- **OK** to delete the **MCCMNC Mapping** entry.
- **Cancel** to cancel the delete function and return to the **Diameter Common > Network Identifiers > MCCMNC Mapping** page.

If **OK** is clicked and the selected **MCCMNC Mapping** entry no longer exists (it was deleted by another user), an error message is displayed.

## Common Application Options

The Enhanced Overload Control Function checkbox can be either enabled or disabled on PCA DA-MPs and SBR MPs. This feature can only be enabled on the NOAM.

**Table 3-17 Common Application Options**

Field	Description	Values
Enhanced Overload Control Function	<p>If this checkbox is unchecked, the existing PCA/SBR overload control function applies to those DA-MPs and SBR MPs where the DRMP feature is disabled.</p> <p>If this checkbox is checked, the enhanced overload control function applies to all PCA DA-MPs and SBR MPs under the same NO topology.</p>	<p>Format: Checkbox</p> <p>Range: checked, unchecked</p> <p>Default: unchecked</p>



---

# Diameter Common on the SOAM

The Diameter Common GUI pages on the SOAM can be used for viewing the DSR Dashboard, for configuration of the MCC Ranges Network Identifiers, and for Bulk Import and Export functions.

## Overview

The Diameter Common menu items on the SOAM provide access to GUI pages to perform the following tasks:

- View **Diameter Common > Dashboard** (see [Dashboard](#))
- Configure **Diameter Common > Network Identifiers > MCC Ranges** (see [MCC Ranges Configuration](#))
- Configure **Diameter Common > MPs > Profiles and Diameter Common > MPs > Profile Assignments** (see [MPs](#))
- Perform DSR Bulk Import/Export operations (see [#unique\\_76](#))

## Dashboard

Depending on your system, the dashboard differs.

- [Dashboard on the NOAM](#)
- [Dashboard on the SOAM](#)

### Dashboard on the NOAM

The Dashboard on the NOAM is viewed at **Diameter Common > Dashboard**.

The Dashboard provides high level Metrics, which provide an overall view of the health of one or more Network Elements (NEs) of a network, making Metrics the core component of the DSR Dashboard. Each column on the Dashboard contains the set of values for a particular Metric. The selection of which Metrics are displayed on the Dashboard is done via configuration.

The NOAM Dashboard shows both Network summary and NE summary Metrics.

The order that Metric Groups are displayed on the Dashboard is determined from configuration which cannot be modified. The order that Metrics are displayed within a Metric Group on the Dashboard display is determined from configuration which cannot be modified. Metrics selected for display on the Dashboard via configuration can be hidden/viewed via a Dashboard GUI control based on threshold level filters. A threshold level filter is used to limit which Metrics are displayed on the Dashboard based on a severity value. These limits are valuable because they focus on more potentially significant problems.

Horizontal and vertical scrolling allows any Metrics which do not fit onto a single physical screen to be seen.

The Dashboard also facilitates troubleshooting via Metric-specific hyperlinks on the Dashboard to assist in viewing more detailed information via existing DSR status and maintenance screens. The linkage between content on the Dashboard to DSR status and maintenance screens will be determined from configuration which cannot be modified.

Per Network Metrics are derived from per-NE summary Metrics. A Network is the set of one or more Dashboard Network Elements. The formula for calculating a Network Metric value is identical to that for calculating the per-NE Metric for that Metric.

### **Dashboard on the SOAM**

The SOAM Dashboard shows the NE's summary Metrics, its per-Server Type summary Metrics and its per-Server Metrics.

A Server Type physically groups Metrics associated with a particular type of Server (e.g., DA-MP) onto the Dashboard display in order to create summary Metrics for Servers of a similar type. The order of Server Types on the SOAM Dashboard is determined from configuration which cannot be modified. The Server Types are predefined and cannot be modified. The DA-MP, SS7-MP, DSR, SBR, and SOAM Server Types are supported.

Server Metrics are maintained by each MP. Per-Server Metric values are periodically pushed to their local SOAM, where they are displayed on the SOAM Dashboard display.

Server Type Metrics show a roll-up of Server Metrics by Server type. The formula for calculating a Server Type Metric value is identical to that for calculating the per-NE Metric for that Metric.

Network Element (NE) Metrics are derived from per-Server Metrics. A Network Element is the set of servers managed by a SOAM. The formula for calculating a per-NE Metric value is Metric-specific although, in general, most NE Metrics are the sum of the per-Server Metrics. The set of servers which are managed by a SOAM is determined through standard NOAM configuration and cannot be modified via Dashboard configuration. An NOAM can manage up to 32 NEs.

## **MCC Ranges Configuration**

The **MCC Ranges** component defines up to 10 distinct, non-overlapping Mobile Country Code (**MCC**) Ranges, which are the first 3 digits of the IMSI. The FABR and RBAR applications consider an IMSI to be invalid for address lookup if the MCC portion of the decoded IMSI falls within any of the Reserved MCC Range configured by the user.

While searching for an IMSI in the Diameter message AVPs, if the MCC digits portion of decoded IMSI digits fall within one of the configured **MCC Ranges**, the IMSI digits will NOT be used for further Address Resolution. The FABR and RBAR applications will continue to search other AVP instances (if present), or next priority AVP (if configured) or next Routing Entity (if configured) for a valid address.

The two following MCC Ranges are reserved by telephony standards and are recommended to be configured in addition to other user-specified ranges:

- 000-199
- 800-899

On the **Diameter Common > Network Identifiers > MCC Ranges** page, you can perform the following actions:

- Filter the list of **MCC Ranges**, to display only the desired **MCC Ranges**.
- Sort the list entries in ascending or descending order by **Start MCC** values or **End MCC** values by clicking the column heading. By default, the list is sorted by **Start MCC** values in ascending ASCII order.
- Click **Insert**.  
The **Diameter Common > Network Identifiers > MCC Ranges [Insert]** page opens. You can add new MCC Ranges. If the maximum number of MCC Ranges (10) already exists in the system, the **Diameter Common > Network Identifiers > MCC Ranges [Insert]** page will not open, and an error message is displayed.
- Select an MCC Range in the list, and click **Edit**.  
The **Diameter Common > Network Identifiers > MCC Ranges [Edit]** page opens. The **Start MCC**, **End MCC**, or both for the selected MCC Range can be edited.
- Select an MCC Range in the list, and click **Delete** to remove the selected MCC Range.

## MCC Ranges Elements

[Table 4-1](#) describes the fields on the **Diameter Common > Network Identifiers > MCC Ranges** pages.

**Table 4-1 MCC Ranges Elements**

Field (* indicates a required field)	Description	Value
*Start MCC	The start value of the Reserved Mobile Country Code Range.	Format: text box; numeric. Range: 0-999
*End MCC	The end value of the Reserved Mobile Country Code Range.	Format: text box; numeric. Range: 0-999

## Adding MCC Ranges

Use this task to configure new **MCC Ranges**.

**MCC Ranges** fields are described in [MCC Ranges Elements](#).

1. On the SOAM, select **Diameter Common > Network Identifiers > MCC Ranges**.

The **Diameter Common > Network Identifiers > MCC Ranges** page appears.

2. Click **Insert**.

The **Diameter Common > Network Identifiers > MCC Ranges [Insert]** page appears.

If the maximum number of **MCC Ranges** (10) has already been configured in the system, the **Diameter Common > Network Identifiers > MCC Ranges [Insert]** page does not open, and an error message appears.

3. Enter a value for the **Start MCC** field.
4. Enter a value for the **End MCC** field.
5. Click:
  - **OK** to save the new **MCC Range** and return to the **Diameter Common > Network Identifiers > MCC Ranges** page.
  - **Apply** to save the new **MCC Range** and remain on this page. The data displayed on the page is updated.
  - **Cancel** to return to the **Diameter Common > Network Identifiers > MCC Ranges** page without saving any changes.

If **OK** or **Apply** is clicked and any of the following conditions exist, an error message appears:

- Any fields contain a value that is out of the allowed range
- Any required field is empty (not entered)
- Adding the new **MCC Range** would cause the maximum number of **MCC Ranges** (10) to be exceeded
- The **Start MCC** field value is greater than the **End MCC** field value
- The **MCC Range** created lies within the ranges of other **MCC Ranges**

## Editing MCC Ranges

Use this task to change **MCC Ranges**.

**MCC Ranges** fields are described in [MCC Ranges Elements](#).

When the **Diameter Common > Network Identifiers > MCC Ranges [Edit]** page opens, the fields are populated with the current configured values.

1. On the SOAM, select **Diameter Common > Network Identifiers > MCC Ranges**.

The **Diameter Common > Network Identifiers > MCC Ranges** page appears.

2. Select the **MCC Range** to be changed.

3. Click **Edit**.

The **Diameter Common > Network Identifiers > MCC Ranges [Edit]** page appears.

4. Change the **Start MCC** value, the **End MCC** value, or both.

5. Click:

- **OK** to save the changes and return to the **Diameter Common > Network Identifiers > MCC Ranges** page.
- **Apply** to save the changes and remain on this page.
- **Cancel** to return to the **Diameter Common > Network Identifiers > MCC Ranges** page without saving any changes.

If **OK** or **Apply** is clicked and any of the following conditions exist, an error message appears:

- The selected **MCC Range** no longer exists; it has been deleted by another user
- Any field contains values that are out of range
- Any required field is empty (not entered)
- The **Start MCC** field value is greater than the **End MCC** field value
- The **MCC Range** created lies within the ranges of other MCC Ranges

## Deleting MCC Ranges

Use this task to delete an MCC Ranges entry.

1. On the SOAM, select **Diameter Common > Network Identifiers > MCC Ranges**.

The **Diameter Common > Network Identifiers > MCC Ranges** page appears.

2. Select the **MCC Ranges** entry to be deleted.

3. Click **Delete**.

A popup window appears to confirm the delete.

4. Click:

- **OK** to delete the **MCC Ranges** entry.
- **Cancel** to cancel the delete function and return to the **Diameter Common > Network Identifiers > MCC Ranges** page.

If **OK** is clicked and the selected **MCC Ranges** entry no longer exists (it was deleted by another user), an error message is displayed.

## MPs

A Diameter Agent Message Processor (DA-MP) is a computer or blade hosting the Diameter base protocol and one or more DSR Applications. Multiple DA-MPs are supported in a DSR system.

An SS7 Message Processor (SS7-MP) is a computer or blade hosting the MD-IWF SS7/TCAP Application that is used in translating MAP Request messages to Diameter Request messages.

An MP Profile defines maximum and threshold values for an MP. An MP Profile must be assigned to each DA-MP and SS7-MP in the system configuration. Select the appropriate MP Profile according to the hardware and application or applications that are running on the MP, as shown in [Table 4-2](#).

---

**Note:** The profiles listed in [Table 4-2](#) and that appear on the MPs GUI pages might not include all of the profiles that are available for all Oracle Communications products. Product-specific profiles and instructions for assigning them are included in the *Installation Guide* for each product.

---

**Table 4-2 MP Profile Selection**

Hardware	Application(s)	MP Profile
DA-MPs		
G6 half height blade	Diameter Relay	G6:Relay
G8/G9 half height blade	Diameter Relay	G8/G9:Relay
G7 full height blade	Diameter Relay	G7:Relay
Virtual DA-MP	Diameter Relay	VM:Relay
<b>Note:</b> If a virtualized version of DSR is being used, then the MP Profile can be VM:10K_MPS.		
Gen9V2 half height blade	Diameter Relay	Gen9V2:Relay
G6 half height blade	Diameter Relay + FABR or RBAR	G6:Database
G8/G9 half height blade	Diameter Relay + FABR or RBAR	G8/G9:Database
G7 full height blade	Diameter Relay + FABR or RBAR	G7:Database
Virtual DA-MP	Diameter Relay + FABR or RBAR	VM:Database
<b>Note:</b> If a virtualized version of DSR is being used, then the MP Profile can be VM:10K_MPS.		
Gen9V2 half height blade	Diameter Relay + FABR or RBAR	Gen9V2:Database
G6 half height blade	Diameter Relay + CPA or PCA	G6:Session
G8/G9 half height blade	Diameter Relay + CPA or PCA	G8/G9:Session
G7 full height blade	Diameter Relay + CPA or PCA	G7:Session
Virtual DA-MP	Diameter Relay + CPA or PCA	VM:10K_MPS
G6 half height blade	Diameter Relay + RBAR + PCA	G6:Session_Database
G8/G9 half height blade	Diameter Relay + RBAR + PCA	G8/G9:Session_Database
G7 full height blade	Diameter Relay + RBAR + PCA	G7:Session_Database



**Table 4-2 (Cont.) MP Profile Selection**

Hardware	Application(s)	MP Profile
Gen9V2 half height blade	Diameter Relay + RBAR + PCA	Gen9V2:Session
SS7-MPs		
G8/G9 half height blade	MAP-to-Diameter Interworking Function (MD-IWF) Application	G8/G9:MD-IWF
Virtual SS7-MP	MAP-to-Diameter Interworking Function (MD-IWF) Application	VM:MD-IWF

[MPs Profiles Elements](#) describes the user-configurable and engineering-configured values in an MP Profile.

---

**Note:** The Ingress Message Rate Alarm Threshold values for the PCA application are user-configurable on the **NOAM Policy and Charging > Configuration > Congestion Options** page; they are not shown in [MPs Profiles Elements](#).

---

## MPs Profiles Elements

[Table 4-3](#) describes the fields on the DA-MP tab on the **Diameter Common > MPs > Profiles** page.

---

**Note:** The Data Input Notes apply only to the DA-MP Configurable elements.

---

[Table 4-4](#) describes the view-only fields on the SS7-MP tab on the **Diameter Common > MPs > Profiles** page.

**Table 4-3 MPs Profiles DA-MP Elements**

Field (* indicates required field)	Description	Data Input Notes
DA-MP Configurable		
*CL1 Discard Percent	The percentage below DA-MP Engineered Ingress MPS that DA-MP Overload Control will police the total DA-MP ingress MPS when the DA-MP is in congestion level 1.	Format: text box Range: 0 - 50% Default: 0
*CL2 Discard Percent	The percentage below DA-MP Engineered Ingress MPS that DA-MP Overload Control will police the total DA-MP ingress MPS to when the DA-MP is in congestion level 2.	Format: text box Range: 10 - 50% Default: 20

**Table 4-3 (Cont.) MPs Profiles DA-MP Elements**

Field (* indicates required field)	Description	Data Input Notes
*CL3 Discard Percent	The percentage below DA-MP Engineered Ingress MPS that DA-MP Overload Control will police the total DA-MP ingress MPS to when the DA-MP is in congestion level 3.	Format: text box Range: 20 - 50% Default: 40
*Congestion Discard Policy	The order of priority and/or color-based traffic segments to consider when determining discard candidates for the application of treatment during DA-MP Congestion processing.	Format: pulldown list Range: Priority Only, Color Within Priority, Priority Within Color Default: Priority Only
*DOC Message Discard Percentage	The percent of total DA-MP ingress MPS above DA-MP Engineered Ingress MPS that DA-MP Overload Control will discard when the DA-MP is in danger of congestion.	Format: text box Range: 0 - 50 % Default: 20
DOC Discard Policy	The order of priority and/or color-based traffic segments to consider when determining discard candidates for the application of treatment during DA-MP DOC processing.	Format: pulldown list Range: Priority Only, Color Within Priority, Priority Within Color Default: Priority Only
DA-MP View-Only		
Maximum Connections	The maximum number of Diameter connections the DA-MP can have configured at any one time	Engineering-configured
Engineered Ingress MPS	The maximum ingress message rate, in messages per second, that the DA-MP will support without overload. This value limits the total Reserved Ingress MPS of all Diameter Connections assigned to the DA-MP.	Engineering-configured
Maximum Ingress Message Rate Minor Alarm Set Threshold	The ingress message rate, in messages per second, above which a minor alarm is raised.	Engineering-configured
Maximum Ingress Message Rate Minor Alarm Clear Threshold	The ingress message rate, in messages per second, below which a minor alarm is cleared.	Engineering-configured
Maximum Ingress Message Rate Major Alarm Set Threshold	The ingress message rate, in messages per second, above which a major alarm is raised.	Engineering-configured

**Table 4-3 (Cont.) MPs Profiles DA-MP Elements**

Field (* indicates required field)	Description	Data Input Notes
Maximum Ingress Message Rate Major Alarm Clear Threshold	The ingress message rate, in messages per second, below which a major alarm is cleared.	Engineering-configured
Maximum Ingress Message Rate Critical Alarm Set Threshold	The ingress message rate, in messages per second, above which a critical alarm is raised.	Engineering-configured
Maximum Ingress Message Rate Critical Alarm Clear Threshold	The ingress message rate, in messages per second, below which a critical alarm is cleared.	Engineering-configured
Routing Message Rate Minor Alarm Set Threshold	The Diameter message processing rate, in messages per second, above which a minor alarm is raised.	Engineering-configured
Routing Message Rate Minor Alarm Clear Threshold	The Diameter message processing rate, in messages per second, below which a minor alarm is cleared.	Engineering-configured
Routing Message Rate Major Alarm Set Threshold	The Diameter message processing rate, in messages per second, above which a major alarm is raised.	Engineering-configured
Routing Message Rate Major Alarm Clear Threshold	The Diameter message processing rate, in messages per second, below which a major alarm is cleared.	Engineering-configured
Routing Message Rate Critical Alarm Set Threshold	The Diameter message processing rate, in messages per second, above which a critical alarm is raised.	Engineering-configured
Routing Message Rate Critical Alarm Clear Threshold	The Diameter message processing rate, in messages per second, below which a critical alarm is cleared.	Engineering-configured
Average Message Size Minor Alarm Set Threshold	The Average Message Size above which a minor alarm is set.	Engineering-configured
Average Message Size Minor Alarm Clear Threshold	The Average Message Size below which a minor alarm is cleared.	Engineering-configured
Average Message Size Major Alarm Set Threshold	The Average Message Size above which a major alarm is set.	Engineering-configured
Average Message Size Major Alarm Clear Threshold	The Average Message Size below which a major alarm is cleared.	Engineering-configured

**Table 4-3 (Cont.) MPs Profiles DA-MP Elements**

Field (* indicates required field)	Description	Data Input Notes
Average Message Size Critical Alarm Set Threshold	The Average Message Size above which a critical alarm is set.	Engineering-configured
Average Message Size Critical Alarm Clear Threshold	The Average Message Size below which a critical alarm is cleared.	Engineering-configured
Average Hold Time Minor Alarm Set Threshold	The Average Hold Time above which a minor alarm is set.	Engineering-configured
Average Hold Time Minor Alarm Clear Threshold	The Average Hold Time below which a minor alarm is cleared.	Engineering-configured
Average Hold Time Major Alarm Set Threshold	The Average Hold Time above which a major alarm is set.	Engineering-configured
Average Hold Time Major Alarm Clear Threshold	The Average Hold Time below which a major alarm is cleared.	Engineering-configured
Average Hold Time Critical Alarm Set Threshold	The Average Hold Time above which a critical alarm is set.	Engineering-configured
Average Hold Time Critical Alarm Clear Threshold	The Average Hold Time below which a critical alarm is cleared.	Engineering-configured
RBAR Receive Message Rate Minor Alarm Set Threshold	The ingress request rate for the RBAR Application, in messages per second, above which a minor alarm is raised.	Engineering-configured
RBAR Receive Message Rate Minor Alarm Clear Threshold	The ingress request rate for the RBAR Application, in messages per second, below which a minor alarm is cleared.	Engineering-configured
RBAR Receive Message Rate Major Alarm Set Threshold	The ingress request rate for the RBAR Application, in messages per second, above which a major alarm is raised.	Engineering-configured
RBAR Receive Message Rate Major Alarm Clear Threshold	The ingress request rate for the RBAR Application, in messages per second, below which a major alarm is cleared.	Engineering-configured
RBAR Receive Message Rate Critical Alarm Set Threshold	The ingress request rate for the RBAR Application, in messages per second, above which a critical alarm is raised.	Engineering-configured

**Table 4-3 (Cont.) MPs Profiles DA-MP Elements**

<b>Field (* indicates required field)</b>	<b>Description</b>	<b>Data Input Notes</b>
RBAR Receive Message Rate Critical Alarm Clear Threshold	The ingress request rate for the RBAR Application, in messages per second, below which a critical alarm is cleared.	Engineering-configured
FABR Receive Message Rate Minor Alarm Set Threshold	The ingress request rate for the FABR Application, in messages per second, above which a minor alarm is raised.	Engineering-configured
FABR Receive Message Rate Minor Alarm Clear Threshold	The ingress request rate for the FABR Application, in messages per second, below which a minor alarm is cleared.	Engineering-configured
FABR Receive Message Rate Major Alarm Set Threshold	The ingress request rate for the FABR Application, in messages per second, above which a major alarm is raised.	Engineering-configured
FABR Receive Message Rate Major Alarm Clear Threshold	The ingress request rate for the FABR Application, in messages per second, below which a major alarm is cleared.	Engineering-configured
FABR Receive Message Rate Critical Alarm Set Threshold	The ingress request rate for the FABR Application, in messages per second, above which a critical alarm is raised.	Engineering-configured
FABR Receive Message Rate Critical Alarm Clear Threshold	The ingress request rate for the FABR Application, in messages per second, below which a critical alarm is cleared.	Engineering-configured
CPA Receive Message Rate Minor Alarm Set Threshold	The ingress request rate for the CPA Application, in messages per second, above which a minor alarm is raised.	Engineering-configured
CPA Receive Message Rate Minor Alarm Clear Threshold	The ingress request rate for the CPA Application, in messages per second, below which a minor alarm is cleared.	Engineering-configured
CPA Receive Message Rate Major Alarm Set Threshold	The ingress request rate for the CPA Application, in messages per second, above which a major alarm is raised.	Engineering-configured
CPA Receive Message Rate Major Alarm Clear Threshold	The ingress request rate for the CPA Application, in messages per second, below which a major alarm is cleared.	Engineering-configured
CPA Receive Message Rate Critical Alarm Set Threshold	The ingress request rate for the CPA Application, in messages per second, above which a critical alarm is raised.	Engineering-configured

**Table 4-3 (Cont.) MPs Profiles DA-MP Elements**

Field (* indicates required field)	Description	Data Input Notes
CPA Receive Message Rate Critical Alarm Clear Threshold	The ingress request rate for the CPA Application, in messages per second, below which a critical alarm is cleared.	Engineering-configured
DM-IWF Receive Message Rate Minor Alarm Set Threshold	The ingress request rate for the DM-IWF Application, in messages per second, above which a critical alarm is raised.	Engineering-configured
DM-IWF Receive Message Rate Minor Alarm Clear Threshold	The ingress request rate for the DM-IWF Application, in messages per second, below which a critical alarm is cleared.	Engineering-configured
DM-IWF Receive Message Rate Major Alarm Set Threshold	The ingress request rate for the DM-IWF Application, in messages per second, above which a critical alarm is raised.	Engineering-configured
DM-IWF Receive Message Rate Major Alarm Clear Threshold	The ingress request rate for the DM-IWF Application, in messages per second, below which a critical alarm is cleared.	Engineering-configured
DM-IWF Receive Message Rate Critical Alarm Set Threshold	The ingress request rate for the DM-IWF Application, in messages per second, above which a critical alarm is raised.	Engineering-configured
DM-IWF Receive Message Rate Critical Alarm Clear Threshold	The ingress request rate for the DM-IWF Application, in messages per second, below which a critical alarm is cleared.	Engineering-configured

**Table 4-4 MPs Profiles SS7-MP Elements**

Field	Description	Data Input Notes
SS7-MP View-Only		
MD-IWF Receive Message Rate Minor Alarm Set Threshold	The ingress request rate for the MD-IWF Application, in messages per second, above which a critical alarm is raised.	Engineering-configured
MD-IWF Receive Message Rate Minor Alarm Clear Threshold	The ingress request rate for the MD-IWF Application, in messages per second, below which a critical alarm is cleared.	Engineering-configured
MD-IWF Receive Message Rate Major Alarm Set Threshold	The ingress request rate for the MD-IWF Application, in messages per second, above which a critical alarm is raised.	Engineering-configured

**Table 4-4 (Cont.) MPs Profiles SS7-MP Elements**

Field	Description	Data Input Notes
MD-IWF Receive Message Rate Major Alarm Clear Threshold	The ingress request rate for the MD-IWF Application, in messages per second, below which a critical alarm is cleared.	Engineering-configured
MD-IWF Receive Message Rate Critical Alarm Set Threshold	The ingress request rate for the MD-IWF Application, in messages per second, above which a critical alarm is raised.	Engineering-configured
MD-IWF Receive Message Rate Critical Alarm Clear Threshold	The ingress request rate for the MD-IWF Application, in messages per second, below which a critical alarm is cleared.	Engineering-configured

## Editing Configurable MP Profile Parameters

Use this task to edit the values for configurable parameters in each MP Profile type that will be assigned to a DA-MP in the DSR.

The configurable parameters are described in [MPs Profiles Elements](#).

1. Select **Diameter Common > MPs > Profiles**.

The **Diameter Common > MPs > Profiles** page appears.

2. For each MP Profile type, edit the values for the configurable parameters.
3. Click:
  - **Apply** to save the edited parameter values.
  - **Cancel** to reset the parameter values to their previous setting.

## MPs Profile Assignments Elements

[Table 4-5](#) describes the fields on the **Diameter Common > MPs > Profile Assignments** page.

**Table 4-5 MPs Profile Assignments Elements**

Field	Description	Data Input Notes
DA-MP	The Hostname of the MP.	View-only
SS7-MP	Active and Standby MP pairs are listed on the same line; they have the same type of Profile assigned.  MPs that are stand-alone or that belong to multi-active server groups will have lines of their own.	

**Table 4-5 (Cont.) MPs Profile Assignments Elements**

Field	Description	Data Input Notes
MP Profile	MP Profile assigned to the MP.	Format: Pulldown list Range: Valid Profiles for the type of MP
current value	The current MP Profile for each MP, and a description of the MP.	View-only

## Assigning MP Profiles to MPs

Use this task to assign an MP Profile to each DA-MP and SS7-MP in the system.

---

---

**Note:** An MP Profile assignment does not take effect until the MP has been restarted.

---

---

[MPs Profile Assignments Elements](#) describes the MP Profile Assignments elements.

1. Select **Diameter Common > MPs > Profile Assignments**.

The **Diameter Common > MPs > Profile Assignments** page appears.

2. For each DA-MP or SS7-MP, select one of the available MP Profiles. See [Table 4-2](#) for help in selecting the appropriate MP Profile.

3. Click:

- **Assign** to assign the selected MP Profiles to the MPs.
- **Cancel** to reset the MP Profile assignments to their previous setting.

To correct a warning that a Standby MP has a different MP Profile assignment than its corresponding Active MP, reassign the desired MP Profile to the Active/Standby MP pair on this page.



---

# Diameter Common Bulk Import and Export

The **Diameter Common > Import** and **Diameter Common > Export** GUI pages provide access to functions for exporting and importing configuration data for Diameter and Diameter Common components, IPFE, MAP-Diameter Interworking, and DSR Applications.

## DSR Bulk Import

The DSR Bulk Import operations use configuration data in ASCII Comma-Separated Values (CSV) files (.csv), to insert new data into, update existing data in, or delete existing data from the Diameter Configuration and Diameter Common, IPFE Configuration, or DSR Applications (FABR, RBAR, PCA, GLA, CPA and Charging SBR, MD-IWF, DM-IWF, and RADIUS) configuration data in the system.

### Import CSV Files

Import CSV files can be created by using a DSR Bulk Export operation, or can be manually created using a text editor. The CSV file formats are described in [Diameter and Diameter Common CSV File Formats and Contents](#).

---

**Caution:** The format of each Import CSV file record must be compatible with the configuration data in the current DSR release in the system.

---

- Configuration data refers to any data that is configured for one of the **Export Application** types (Diameter, FABR, RBAR, CPA, PCA, GLA, SBR, MDIWF, IPFE).
- For the "Diameter" **Export Application** type, configuration data refers to any data that is configured using the GUI pages that are available from the **Diameter Configuration** menu folder, and the **Diameter Common > Network Identifiers** and **Diameter Common > MPs** menu folders.

---

**Note:** **Diameter > AVP Dictionary** configuration data cannot be imported using the Bulk Export function.

---

---

**Note:** Diameter Mediation configuration data cannot be imported with DSR Bulk Import operations; Mediation has its own Import and Export functions.

---

- Each file can contain one or more records of the same format (for one configuration component, such as records for several Diameter Configuration Connections); the entire format for each record must be contained in one line of the file.

Files that are created using the DSR Bulk Export operation can be exported either to the Status & Manage File Management Directory (**Status > Manage > Files** page), or to the local Export Server Directory.

For files that are exported to the Export Server Directory,

- If a remote Export Server has been configured (see the **Administration > Remote Servers > Data Export** page), the files in the Export Server Directory are automatically transferred to the configured remote Export Server and are deleted from the Export Server Directory. The transferred files do not appear in the list on the local system **Status & Manage > Files** page or in the list on the **Diameter > Configuration > Import** page.
- If a remote Export Server has not been configured, the files in the Export Server Directory appear in the list on the **Status & Manage > Tasks > Active Tasks** page, and also appear in the list on the local system **Status & Manage > Files** page, but not on the **Diameter > Configuration > Import** page.

For files that are exported to the File Management Directory,

- The files appear in the File Management area list on the local system **Status & Manage > Files** page and in the list on the **Diameter > Configuration > Import** page.
- The files can be downloaded, edited, uploaded, and used for Import operations.
  - Import CSV files must be in the File Management area of the local system before they can be used for Import operations on the local system.
  - The **Download** function on the **Status & Manage > Files** page can be used to download the files to a location off of the local system for editing or transfer to another system.
  - The **Upload** function on the **Status & Manage > Files** page can be used to upload the files to the File Management area of the local system.

For files that are created manually using a text editor,

- Import CSV files that are located off of the local system must be uploaded to the File Management area of the local system before they can be used for Import operations on the local system.
- The **Upload** function on the **Status & Manage > Files** page can be used to upload the files to the File Management area of the local system.

### Import Operations

---

---

**Caution:** Bulk Import can degrade the performance of the DA-MP and should be performed only in the maintenance window.

---

---

The CSV files that are used for Import operations must be in the local File Management area on the OAM where the data can be configured:

- The NOAM for Diameter Topology Hiding data, network-wide PCA data, and MAP-Diameter Interworking data for MD-IWF

- The SOAM for the rest of the Diameter data, site-specific PCA data, MAP-Diameter Interworking data for DM-IWF, IPFE data, MP Profiles and Profile Assignments data, and data for other DSR Applications.

The **Diameter Common > Import** page lists all files in the File Management area (on the **Status & Manage > Files** page) that have the .csv file extension.

The **File Management** button on the **Diameter Common > Import** page opens the **Status & Manage > Files** page.

The following Import operations can be performed:

---

**Note:** The **Application Type**, **Keyword**, and **Key** fields in each file record are used to identify the configuration data entry in the system.

---

- Insert new configuration data into the system

Only data records that do not currently exist in the system are inserted. Any records in the file that do already exist in the system are treated and logged as failures.

- Update existing configuration data in the system

Only data records that currently exist in the system can be updated. Any records in the file that do not already exist in the system, and any records that already exist in the system but are not updated in the file, are treated and logged as failures.

- Delete existing configuration data from the system

Only data records that currently exist in the system can be deleted. Any records in the file that do not exist in the system, and any records that exist in the system but are not changed in the file, are treated and logged as failures.

For the Import operation on each record in a file to be successful with no errors logged for the operation, each record must be valid for the configuration data format and for the Import operation that is being performed.

- Exported configuration data probably needs to be edited before the exported file is used for an Import operation on the same system.

**Insert from CSV operations** - Records need to be added or edited to be able to insert new configuration data entries (such as connections or Route Lists). It is best to remove from the file any records for existing configuration data entries; they will be flagged as errors for an Insert operation. It might be difficult to distinguish between logged errors for existing data and for the records for the new entries.

**Update from CSV operations** – Records need to be edited to change element values in existing configuration data entries. The Application Type, Keyword, and Key fields are NOT changed in the records, so that the entries can be identified as existing in the system. It is best to remove from the file any records for existing configuration data entries that are NOT being updated; they will be flagged as errors for an Insert operation. It might be difficult to distinguish between logged errors for existing records that are not updated and for the updated records.

**Delete from CSV operations** – Using an exported file without editing it will remove from the system all of the configuration data entries in the exported records. If you do not want to delete all of the configuration data entries that are

in the file records, edit the file and remove the records for the entries that are NOT to be deleted. Records for configuration data entries that do not exist in the system will be flagged as errors for a Delete operation. For example, if you want to delete 20 of 100 configured connections, edit the file and remove the records for the 80 connections that you do not want to delete.

- Files that were created using the DSR Bulk Export operation and are transferred to another system for importing configuration data on that other system may not need to be edited. Exceptions might be system-specific information such as IP addresses and MP Profiles.
- Manually created files can be created so that they contain only the configuration data that is needed for the desired Import operation.

The files can be edited later for use with a different Import operation.

Manually created CSV files are not required to contain a comment header. If a comment header is included in the file, it must be formatted using pound signs (#), as shown in the Export file header that is described in Export Results.

---

**Note:** IPFE supports Import and Delete operations only. Due to the design of the IPFE database, import of a single table is not supported. Importing both *IpfeOption* and *IpListTsa* is required. You must import *IpfeOption* first followed by *IpListTsa*. *IpfeOption* defines part of the Target Set data used during validation of the *IpListTsa*.

---

### Import Operation Results

Each Import operation creates one or two files that appear in the File Management area:

- A log file that has the same name as the Import file, but with the .log extension

For example, `ImportExportStatus/<import file name>.log`

The Bulk Import operation can be configured with the **Abort On First Error** check box to:

- Log the error for each record that failed during the operation, and continue the Import operation.
- Log the error for just the first record that failed, and end the Import operation.

Information for records that succeed is not included in the log. The log file contains the Action (Import operation) that was performed; and the number of Successful Operations (records), Failed Operations (records), and Total Operations (records).

- A Failures file, if failures occurred during the Import operation

The file is a .csv with the same name as the Import file, but contains `_Failures` in the file name.

For example, if the Import file name is

`October_2_SO_DSR1_Diameter_CmdCodes.csv`, the Failures file is named `October_2_SO_DSR1_Diameter_CmdCodes_Failures.csv`

A Failures file can be downloaded from the local File Management area to a server off the local system, edited to correct each record that failed, uploaded to the local

system File Management area, and used again to repeat the Import operation and successfully process the records.

Any Failures .csv files in the File Management Directory that remain unchanged for more than 14 days and any log files older than 14 days will be automatically removed. The task to remove these files runs once a day.

### The Diameter Common > Import page

On the **Diameter Common > Import** page, you can perform the following actions:

- Sort the list of files by column, by clicking the column heading. The default sort is by File Name in ascending ASCII order.
- Select a file and click **Insert From CSV**, **Update From CSV**, or **Delete From CSV**.  
A popup window appears to confirm the selected Import operation.  
One import or export task at a time is allowed.
- Click **Tasks** to display the status and progress of an Import operation.  
The progress of the import operation can also be viewed on the **Status > Manage > Tasks > Active Tasks** page.
- Click **File Management** to open the **Status & Manage > Files** page.  
Exported .csv files can be viewed, downloaded to an external location, uploaded from an external location, and deleted.  
Log files from Import operations can be viewed and deleted.
- Click the **Abort On First Error** check box.  
When a check mark appears in the box, only the first record that failed is recorded in the log and the Failures .csv file. The Bulk Import operation stops after the error is detected and logged.  
When there is no check mark in the box (the default), all records that failed are recorded in the log and the Failures .csv file.

## Bulk Import elements

Table 5-1 describes the fields on the **Diameter Common > Import** page.

**Table 5-1 Bulk Import Elements**

Element	Description
File Name	The name of the .csv file from the Status & Manage File Management area.
Line Count	Number of lines in the file.
Time Stamp	The creation time and date of the file.

## Using an Import File to insert DSR Configuration Data

Use the following procedure to insert into the system new configuration data entries from the records in a DSR Bulk Import CSV file.

1. Select **Diameter Common > Import**.

The **Diameter > Common > Import** page appears. The page lists all of the .csv files from the **Status & Manage > Files** File Management area.

2. Select the **File Name** for the file to be used to insert the configuration data.
3. Specify whether the Import operation should stop processing on the first error that occurs, or should continue processing if errors occur during the Import operation.
  - To continue processing when errors occur, click the **Abort On First Error** check box so that the box is empty (the default).
  - To stop processing on the first error, click the **Abort On First Error** check box so that a checkmark appears in the check box.
4. Click **Insert From CSV**.

A popup window appears to confirm the file to use for the **Insert From CSV** operation.

5. On the popup window, do one of the following actions:
  - **OK** to perform the Import **Insert From CSV** operation.  
An indication is displayed that the operation is in progress.
  - **Cancel** to cancel the **Insert From CSV** operation and return to the **Diameter Common > Import** page.
6. To view the progress of the Import operation, you can:
  - Select the **Tasks** icon near the top left of the **Diameter > Configuration > Import** page.
  - Select **Status & Manage > Tasks > Active Tasks** to open the **Status & Manage > Tasks > Active Tasks (Filtered)** page.
7. To view the log file from the Import operation, and the Failures.csv file if one was created, click **File Management** to open the **Status & Manage > Files (Filtered)** page.

## Using an Import File to update DSR Configuration Data

Use the following procedure to use the contents of a DSR Bulk Import .csv file to update existing configuration data in the system.

1. Select **Diameter Common > Import**.

The **Diameter Common > Import** page appears. The page lists all of the .csv files from the **Status & Manage > Files** File Management area.

2. Select the **File Name** for the file to be used to update the configuration data.
3. Specify whether the Import operation should stop processing on the first error that occurs, or should continue processing if errors occur during the Import operation.
  - To continue processing when errors occur, click the **Abort On First Error** check box so that the box is empty (the default).
  - To stop processing on the first error, click the **Abort On First Error** check box so that a checkmark appears in the check box.

4. Click **Update From CSV**.

A popup window appears to confirm the file to use for the **Update From CSV** operation.

5. On the popup window, do one of the following actions:

- **OK** to perform the Import **Update From CSV** operation.  
An indication is displayed that the operation is in progress.
- **Cancel** to cancel the **Update From CSV** operation and return to the **Diameter Common > Import** page.

6. To view the progress of the Import operation, you can:

- Select the **Tasks** icon near the top left of the **Diameter > Configuration > Import** page.
- Select **Status & Manage > Tasks > Active Tasks** to open the **Status & Manage > Tasks > Active Tasks (Filtered)** page.

7. To view the log file from the Import operation, and the Failures.csv file if one was created, click **File Management** to open the **Status & Manage > Files (Filtered)** page.

## Using an Import File to delete DSR Configuration Data

Use the following procedure to use the contents of a DSR Bulk Import .csv file to delete configuration data.

---

---

**Note:** This operation does NOT delete a .csv file from the list of files on the page.

---

---

1. Select **Diameter Common > Import**.

The **Diameter Common > Import** page appears. The page lists all of the .csv files from the **Status & Manage > Files** File Management area.

2. Select the **File Name** for the file to be used to delete the configuration data.

3. Click **Delete From CSV**.

A popup window appears to confirm the file that you want to use for the **Delete From CSV** operation.

4. On the popup window, click:

- **OK** to perform the Import **Delete From CSV** operation.  
An indication is displayed that the operation is in progress.
- Click **Cancel** to cancel the **Delete From CSV** operation and return to the **Diameter Common > Import** page.

5. To view the progress of the Import operation, you can:

- Select the **Tasks** icon near the top of the **Diameter Common > Import** page.

- Select **Status & Manage > Tasks > Active Tasks** to open the **Status & Manage > Tasks > Active Tasks (Filtered)** page.
6. To view the log file from the Import operation, click **File Management** to open the **Status & Manage > Files (Filtered)** page.

## DSR Bulk Export

The DSR Bulk Export operation creates ASCII Comma-Separated Values (CSV) files (.csv) containing Diameter and Diameter Common, IPFE, and DSR Application configuration data. Exported configuration data can be edited and used with the DSR Bulk Import operations to change the configuration data in the local system without the use of GUI pages. The exported files can be transferred to and used to configure another DSR system.

---

**Note:** Exported CSV files are not intended for long-term backup of configuration data. (Use the Database Backup function described in the *DSR Administration Guide* and DSR Administration Help for long-term backups of configuration data.)

---

### Exported CSV Files

Each exported CSV file contains one or more records for the configuration data that was selected for the Export operation. The record formats and contents are described in [Diameter and Diameter Common CSV File Formats and Contents](#).

The selected configuration data can be exported once immediately, or can be periodically automatically exported on a defined schedule.

- Configuration data refers to any data that is configured for one of the **Export Application** types (Diameter, RADIUS, FABR, RBAR, CPA, SBR, PCA, GLA, MDIWF and IPFE).

---

**Note:** GLA requires that Policy DRA Pooling is active. For more information, see *Gateway Location Application (GLA) User Guide* or *PCA User Guide*.

---

Exports must be performed on the OAM where the data can be configured - the NOAM for Diameter Topology Hiding, Diameter Common data, network-wide PCA data, and MAP-Interworking data for MD-IWF ; and the SOAM for the rest of the Diameter data, Diameter Common data, site-specific PCA data, IPFE data, MAP-Diameter Interworking data for DM-IWF, and DSR Application data.

- For the "Diameter" **Export Application** type, configuration data refers to any data that is configured using the GUI pages that are available from the Diameter Configuration folders and the Diameter Common folders.

---

**Note:** **Diameter > AVP Dictionary** configuration data cannot be imported using the Bulk Export function.

---

---

**Note:** Diameter Mediation configuration data cannot be exported with DSR Bulk Export; Mediation has its own Import and Export functions.

---



The following configuration data can be exported in one Export operation:

- All exportable configuration data available on the OAM
- All exportable configuration data from the selected Export Application, on the OAM
- Exportable configuration data from a selected configuration component for the selected Export Application

When ALL is selected, the exported data for each configuration component appears in a separate .csv file.

For data that is exported once immediately, the default Output File Name has the following format; the name can be changed and is not required to keep this format: NE Name\_Timestamp-TimeZone\_ApplicationType\_DataType.csv.

For data that is scheduled to be exported periodically, the default Task Name is DSR Configuration Export; the name can be changed.

All exported .csv files contain a comment header with the following information:

- Software revision used to generate the exported file
- Date and Time file was generated
- Name of each selected Data object exported
- Total number of exported records

The following example illustrates how the export file header might appear, but it might not look exactly as shown:

```
#####
#
# Oracle Communications DSR Software Revision: <x.x.x-xxx.xx.x>
# Date/Time Generated: <yyy/mon/dd hh:mm:ss timezone>
# Exported Application: <ApplicationType>
# Exported Object: <ObjectType>
# Number of Records: <nnn>
#####
#
```

## Export Operations

Exported files can be written to the File Management Directory in the Status & Manage File Management area (see the **Status & Manage > Files** page) or to the Export Server Directory.

Files that are created by a DSR Bulk Export operation must be in the local File Management area before they can be used for Bulk Import operations. See [DSR Bulk Import](#).

For files that are exported to the local File Management Directory,

- The files appear in the File Management area list on the local system (see the **Status & Manage > Files** page) and in the list on the **Diameter > Configuration > Import** page.
- These files can be used for Import operations on the local system.

Any .csv files that are exported to the File Management Directory and remain unchanged for more than 14 days will be automatically removed. The task to remove these files runs once a day.

For files that are exported to the local Export Server Directory,

- If a remote Export Server has been configured (see **Administration > Remote Servers > Data Export**), the files in the local Export Server Directory are transferred to the configured remote Export Server location and are deleted from the local Export Server Directory. These transferred files do not appear in the File Management area on the local system, and cannot be used for Import operations on the local system.
- If a remote Export Server has not been configured, the files in the local Export Server Directory appear in the list on the **Status & Manage > Tasks > Active Tasks** page and in the File Management area list on the local system, but not on the **Diameter Common > Import** page. These files cannot be used for Import operations on the local system.

### Export Results

If the export has any failures or is unsuccessful, the results of the export operation are logged to a log file with the same name as the exported file but with a ".log" extension. Successful export operations will not be logged.

### The Diameter Common Export page

On the **Diameter Common > Export** page, you can perform the following actions:

- Manually export configuration data one time immediately in a CSV file to either the Export Server or the File Management area.
- Schedule periodic automatic exports of configuration data in CSV files to either the Export Server or the File Management area. Scheduled exports are listed on the **Status & Manage > Tasks > Scheduled Tasks** page.
- Click **Tasks** to display the status and progress of an Export operation.  
The progress of the export operation can also be viewed on the **Status & Manage > Tasks > Active Tasks** page.
- Click **File Management** on the **Diameter Common > Export** page to open the **Status & Manage > Files** page.

On the **Status & Manage > Files** page, exported .csv files can be viewed, downloaded to an external location, uploaded from an external location, and deleted. Log files from Export operations can be viewed and deleted.

## Bulk Export elements

[Table 5-2](#) describes the fields on the Diameter Configuration Export page.

**Table 5-2 Bulk Export Elements**

Element (* indicates required field)	Description	Data Input Notes
*Export Application	Diameter or activated DSR Application from which configuration data will be exported. <b>Diameter</b> includes Diameter Common configuration data.	Format: Pulldown list Range: ALL, <b>Diameter</b> , <b>IPFE</b> , all activated DSR Applications To clear the field, select - <b>Select-</b> in the list.
Export Data	Data to be exported. <b>Diameter</b> , <b>IPFE</b> , or a specific activated DSR Application must be selected in Export Application before this list is available. This field is required when <b>Diameter</b> or a DSR Application is selected. <b>Diameter</b> includes Diameter Common configuration data.	Format: Pulldown list Range: ALL; configuration folders for <b>Diameter</b> (except Mediation folders), <b>IPFE</b> , or the selected DSR Application. To clear the field, select - <b>Select-</b> in the list.
Output File Name	Name of the .csv export file. The default name appears in this field when Export Frequency is <b>Once</b> and: <ul style="list-style-type: none"> <li><b>ALL</b> is selected in Export Application</li> <li><b>Diameter</b>, <b>IPFE</b>, or a DSR Application is selected in Export Application, and <b>ALL</b> or a specific configuration folder is selected in Export Data</li> </ul> <b>Diameter</b> includes Diameter Common data. The default file name can be changed, and is not required to follow the default format. This field is required when it is available.	Format: Valid characters are alphanumeric characters, dash (-), and underscore (_) Default file name: file name in the format NeName_ReportDate-TimeZone_ApplicationType_ReportType, with the following values: NeName = Host name of the NO or SO from which the configuration data will be exported. ReportDate = Current date in the format mmddyy. TimeZone = Current Time Zone. Application Type = the selected Export Application to export from ObjectType = the selected Data to export

**Table 5-2 (Cont.) Bulk Export Elements**

Element (* indicates required field)	Description	Data Input Notes
*Task Name	Periodic Export Task name. This field is required when the Export Frequency is not <b>Once</b> .	Format: text box; length must not exceed 24 characters. Valid characters are alphanumeric, minus sign (-), and spaces between words. The first character must be an alpha character. The last character must not be a minus sign. Range: 1-24 characters Default: DSR Configuration Export
Description	Periodic Export Task description.	Format: text box; length must not exceed 255 characters. Valid characters are alphanumeric, minus sign (-), and spaces between words. The first character must be an alpha character. The last character must not be a minus sign. Range: 1-255 characters
Export Directory	Directory in which an export file will be placed. Files that are exported to the Export Server Directory will automatically be copied over to the remote if one is configured. The files will be deleted from the local system after the transfer to the remote Export Server is complete. Files that are exported to the File Management Directory, or are exported to the Export Server Directory when no remote Export Server is configured, can be viewed and imported on the local system.	Format: radio buttons Range: radio button for Export Server Directory, radio button for File Management Directory Default: Export Server Directory

**Table 5-2 (Cont.) Bulk Export Elements**

Element (* indicates required field)	Description	Data Input Notes
Export Frequency	How often the data will be written to the Export Server Directory or File Management Directory. When <b>Once</b> is selected, the export is performed immediately after <b>Ok</b> is clicked.	Format: radio buttons Range: radio buttons for Once, Hourly, Daily, Weekly Default: Once
Minute	The minute of each hour when the data will be exported. This field is available only when <b>Hourly</b> is selected for <b>Export Frequency</b> .	Format: text box with up and down selection arrows Range: 1-59 Default: 0
Time of Day	Time of day when data will be exported. This field is available only when <b>Daily</b> or <b>Weekly</b> is selected for <b>Export Frequency</b> .	Format: <ul style="list-style-type: none"> <li>Text box; the time can be typed in the format HH:MM AM or HH:MM PM.</li> <li>Pulldown list; click in the box to display a 24-hour list of times that are at 15-minute intervals. Select the desired time in the list.</li> </ul> Range: 12:00 AM through 11:45 PM in 15-minute intervals, or specified time Default: 12:00 AM
Day of the Week	Day of the week on which data will be exported. This field is available only when <b>Weekly</b> is selected for <b>Export Frequency</b> .	Format: a radio button for each day of the week Range: Sunday, Monday, Tuesday, Wednesday, Thursday, Friday, Saturday Default: Sunday

## Manually Exporting a Configuration Data File Once

Use the following procedure to export a configuration data .csv file once immediately to the Status & Manage File Management area or to the Export Server Directory.

---

**Note:** The exported file appears the File Management area list on the **Status & Manage > Files** page if the **File Management Directory** is selected as the **Export Directory**, or if the **Export Server Directory** is selected and no remote Export Server is configured.

---

1. Navigate to **Diameter Common > Export**.
2. Verify the **Once** option is selected in the **Export Frequency** list. (Select **Once** if another radio button is currently selected.)
3. From the **Export Application** options, select **ALL**, **Diameter**, **IPFE**, **RADIUS**, or the activated DSR application from which the configuration data will be exported.

If you selected **ALL**, go to step 5.

4. From the **Export Data** options, select **ALL** or the configuration folder that contains the data that will be exported from the selected **Export Application** type.
5. Either use (do not change) the default **Output File Name**, or change the entry to the desired name.
6. Select the **Export Directory** option for the file that will be exported.

Select either the Export Server Directory (the default), or the File Management Directory.

7. Click **OK** to Export.

An indication displays that the operation is in progress.

8. To view the progress of the Export operation, you can:
  - Select the **Tasks** icon near the top of the **Diameter Common > Export** page.
  - Navigate to **Status & Manage > Tasks > Active Tasks** to display open tasks.
9. To locate a file in the File Management area or to view the log file from an Export operation, click **File Management** to open the **Status & Manage > Files (Filtered)** page.

## Scheduling Periodic Automatic Exports of Configuration Data

Use the following procedure to schedule periodic automatic Exports of configuration data files to the local Export Server Directory or to the local File Management area.

---

**Note:** When the selected **Export Directory** is the **Export Server Directory**, the file is exported to a temporary Export directory on the local system. A remote Export Server must be configured before the exported file can be transferred to the specified directory on the configured remote Export Server. See the online help for the **Administration > Remote Servers > Data Export** page and Help for instructions to configure a remote Export Server.

If no remote Export Server is configured, or if the exported configuration data could be used for Import operations on the local system, select **File Management Directory** as the **Export Directory**.

---

1. Select **Diameter Common > Export**.

The **Diameter Common > Export** page appears.

2. In the **Export Application** list, select **ALL**, **Diameter**, **IPFE**, **RADIUS**, or the activated DSR Application from which the configuration data will be exported.

If you selected **ALL**, go to 4.

3. In the **Export Data** list, select **ALL** or the configuration folder that contains the data that will be exported from the selected **Export Application** type.

4. Select the radio button for the **Export Frequency** of the scheduled Exports. (Do not select **Once**.)

5. Either use the default **Task Name** (DSR Configuration Export), or change the name if desired for the Export operation.

The **Task Name** is required when the **Export Frequency** is not **Once**.

6. If a description of the Export task is desired, enter the **Description** in the text box (up to 255 characters).

7. Select the radio button for the **Export Directory** to which the file will be exported.

Select either the **Export Server Directory** (the default), or the **File Management Directory**.

Select the **File Management Directory** if no remote Export Server has been configured.

8. Enter or select the time or day information to specify when the scheduled Export operations will occur.

- If **Export Frequency** is **Hourly**, enter (type or click the arrows) the **Minute** of each hour (0-59) when the file will be exported.
- If **Export Frequency** is **Daily**, enter (type, or click in the box and select from the list) the **Time of Day** when the file will be exported. Select from 15-minute intervals or enter a specific time.
- If **Export Frequency** is **Weekly**,
  - Select the radio button for the **Day of Week** on which the file will be exported.
  - Enter (type, or click in the box and select from the pulldown list) the **Time of Day** when the file will be exported. Select from 15-minute intervals or enter a specific time.

9. Click **Ok** to save the schedule.

To view, edit, or delete the saved schedule task, select **Status & Manage > Tasks > Active Tasks** or click the link in the indication to open the **Status & Manage > Tasks > Scheduled Tasks** page.

The schedule can be changed or deleted on the **Status & Managed > Tasks > Scheduled Tasks** page.

10. To view the progress of an Export operation, you can:

- Select the **Tasks** icon near the top of the **Diameter Common > Export** page.
  - Select **Status & Manage > Tasks > Active Tasks** to open the **Status & Manage > Tasks > Active Tasks (Filtered)** page.
11. To locate a file in the File Management area or to view the log file from an Export operation, click **File Management** to open the **Status & Manage > Files (Filtered)** page.

## Bulk Import and Export CSV File Formats and Contents

### CSV File Formats and Contents

DSR Bulk Import and Export files support an ASCII Comma-Separated Values (CSV) file format.

- The configuration data described in each table in this help section is contained in a single line in the CSV file.
- The first field or column of each line defines the Application Type; see [Table 5-3](#).
- The second column describes the configuration data type, such as LocalNode, PeerNode, or RouteList.
- Subsequent fields or columns contain the associated configuration data.
- Fields containing text that includes spaces or commas are enclosed in double quotes.
- Element values that are selected using radio buttons on the GUI page are shown as separate fields or columns in the CSV Format tables. A selected value appears in its field or column; an unselected value is shown as just two commas in the file (,,,,,) to maintain the positioning in the file.
- The CSV file can include optional comment lines for documenting within the file. Comment lines must begin with a pound sign (#) in the first column, and can be included on any line of the file.
- All text fields within the CSV file containing comma (,), double quotes ("), newline (\n), tab (\t), carriage return (\r) or their combinations are double quoted.

**Table 5-3 Application Types Supported by DSR Bulk Import and Export**

Application Type	Description
Diameter	Common Diameter PlugIn (DPI); includes Diameter Common data
RBAR	<b>Range Based Address Resolution (RBAR)</b>
FABR	<b>Full Address Based Resolution (FABR)</b>
CPA	<b>Charging Proxy Application (CPA)</b>
SBR	<b>Session Binding Repository (Charging SBR)</b>
PCA	<b>Policy and Charging Application (PCA)</b>
IPFE	<b>IP Front End (IPFE)</b>



**Table 5-3 (Cont.) Application Types Supported by DSR Bulk Import and Export**

Application Type	Description
GLA	Gateway Location Application (GLA)
MAPIWF	MAP-Diameter Interworking Function
RADIUS	Remote Authentication Dial In User Service

## Diameter and Diameter Common CSV File Formats and Contents

### Diameter CSV File Formats

The following tables describe the CSV file content and attribute field or column positions for all Diameter configuration data supported by the Diameter Application Type.

---

**Note:** **Diameter > AVP Dictionary** configuration data cannot be imported and exported with the Bulk Import/Export functions in Diameter Common.

---

"Local Node Configuration Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-4](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-4 Local Node CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	LocalNode (Keyword)
2	Name (Key)
3	Fqdn
4	Realm
5	Tcp Port
6	Sctp Port
7	Dtls Port
8	TlsPort
9	RADIUS UDP Server Ports [0] (repeated x 10)
19	Enable RADIUS UDP Client Ports (Yes/No)
20	RADIUS Client UDP Port Range Start
21	RADIUS Client UDP Port Range End

**Table 5-4 (Cont.) Local Node CSV Format**

Column	Data Description
22	Verification Mode ('SslVerifyNone', 'SslVerifyPeer', 'SslVerifyPeerFailIfNoPeerCert' and 'SslVerifyPeerVerifyClientOnce')
23	Certificate Type
24	Certificate Name
25	Connection Configuration Set Name
26	Cex Configuration Set Name
27	IP Address [0] (repeated x 128)
153	IP Address [127]
154	IP Type [0] (LocalIp, PeerIp, IpfeTsa) (repeated x 128)
282	IP Type [127] (LocalIp, PeerIp, IpfeTsa)

"Peer Node Configuration Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-5](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-5 Peer Node CSV Format**

Column	Data Description
0	Application Type
1	PeerNode (Keyword)
2	Name (Key)
3	AAA Protocol (RADIUS, Diameter)
4	Fqdn
5	Realm
6	Tcp Port
7	Sctp Port
8	Dtls Port
9	Tls Port
10	RADIUS Server UDP Ports[0] (repeated x 10)
19	RADIUS Server UDP Ports[9]
20	Replace Destination Host (No, Yes)

**Table 5-5 (Cont.) Peer Node CSV Format**

Column	Data Description
21	Replace Destination Realm (No, Yes)
22	Minimum Connection Capacity
23	Alternate Route on Connection failure (SamePeer, DifferentPeer, SameConnection)
24	Alternate Route on Answer Timeout (SamePeer, DifferentPeer, SameConnection)
25	Alternate Route on Answer Result Code (SamePeer, DifferentPeer, SameConnection)
26	Alternate Implicit Route
27	Maximum Alternate Routing Attempts
28	IP Address [0] (repeated x 128)
155	IP Address [127]
156	Dynamic (No, Yes)
157	Routing Option Set
158	Pending Answer Timer
159	Peer Route Table
160	Message Priority Setting
161	Message Priority Configuration Set
162	Application Route Table
163	Topology Hiding Status (Enabled, Disabled)
164	Peer Node Group Name
165	Transaction Configuration Set
166	AVP Removal List

"Peer Node Group Configuration Elements" in the *Diameter User Guide* and Help describes the configuration data elements list in [Table 5-6](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-6 Peer Node Group CSV Format**

Column	Data Description
0	Application Type
1	PeerNodeGroup (Keyword)
2	Peer Node Group Name

"Route Groups Configuration Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-7](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-7 Route Group CSV Format**

Column	Data Description
0	Application Type
1	RouteGrp (Keyword)
2	Name (Key)
3	Dynamic (No, Yes)
4	Type (Peer, Connection)
5	Peer Node 1 Name
6	Peer Node 1 Weight (repeated x 160)
323	Peer Node 160 Name
324	Peer Node 160 Weight
325	Connection 1 Name
326	Connection 1 Weight (repeated x 512)
1347	Connection 512 Name
1348	Connection 512 Weight

"Route List Configuration Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-8](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-8 Route List CSV Format**

Column	Data Description
0	Application Type
1	RouteList (Keyword)
2	Name (Key)
3	Dynamic (No, Yes)
4	Minimum Route Group Availability Weight
5	Route Across Route Groups (Enabled/ Disabled)
6	Route Group 1 Name
7	Route Group 1 Priority (repeated x 3)

**Table 5-8 (Cont.) Route List CSV Format**

Column	Data Description
10	Route Group 3 Name
11	Route Group 3 Priority
12	Site Name[0]
13	Traffic Throttle Group[0]
14	Maximum Loss Percent Threshold[0]
15	Route Group Name[0] (repeated x 10)
48	Site Name[10]
49	Traffic Throttle Group[10]
50	Maximum Loss Percent Threshold[10]
51	Route Group Name[10] (12-51 repeated x 3)
92	Site Name[0]
93	Traffic Throttle Group[0]
94	Maximum Loss Percent Threshold[0]
95	Route Group Name[0] (repeated x 10)
128	Site Name[0]
129	Traffic Throttle Group[0]
130	Maximum Loss Percent Threshold[0]
131	Route Group Name[0]

"Peer Routing Rules Configuration Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-9](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-9 Peer Routing Rule CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	PeerRouteRule (Keyword)
2	Name (Key)
3	Priority

**Table 5-9 (Cont.) Peer Routing Rule CSV Format**

Column	Data Description
4	param (DestHost, DestRealm, OrigHost, OrigRealm, CmdCode, AppID)
5	condOperator (Present, Absent, Equal, Not Equal, StartsWith, EndsWith, DontCare, Always True)
6	Value
7	param (DestHost, DestRealm, OrigHost, OrigRealm, CmdCode, AppID)
8	condOperator (Present, Absent, Equal, Not Equal, StartsWith, EndsWith, DontCare, Always True)
9	Value
10	param (DestHost, DestRealm, OrigHost, OrigRealm, CmdCode, AppID)
11	condOperator (Present, Absent, Equal, Not Equal, StartsWith, EndsWith, DontCare, Always True)
12	Value
13	param (DestHost, DestRealm, OrigHost, OrigRealm, CmdCode, AppID)
14	condOperator (Present, Absent, Equal, Not Equal, StartsWith, EndsWith, DontCare, Always True)
15	Value
16	param (DestHost, DestRealm, OrigHost, OrigRealm, CmdCode, AppID)
17	condOperator (Present, Absent, Equal, Not Equal, StartsWith, EndsWith, DontCare, Always True)
18	value
19	param (DestHost, DestRealm, OrigHost, OrigRealm, CmdCode, AppID)
20	condOperator (Present, Absent, Equal, Not Equal, StartsWith, EndsWith, DontCare, Always True)
21	Value
22	Action (RouteToPeer, Forward To Peer Route Table, SendAnswer, Abandon With No Answer)

**Table 5-9 (Cont.) Peer Routing Rule CSV Format**

Column	Data Description
23	Target Peer Route Table Name
24	Route List Name
25	Diameter Answer Code
26	Answer Error Message
27	Message Priority (NC, PR0, PR1, PR2)
28	Message Copy Configuration Set
29	Vendor Id
30	Peer Route Table

"Connections Configuration Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-10](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-10 Connection CSV Format**

Column	Data Description
0	Application Type
1	Conn (Keyword)
2	Connection Name (Key)
3	AAA Protocol (RADIUS, Diameter)
4	Type (FullySpecified, LocalMpInitiator, LocalMpResponder, RadiusServer, RadiusClient)
5	Local Node Name
6	Dynamic (No, Yes)
7	Peer Node Name
8	IPFE Initiator DAMP IP Address
9	Protocol Type (Tcp, Sctp, Dtls, Tls, Udp)
10	Connection Configuration Set Name
11	Cex Configuration Set Name
12	Cap Configuration Set Name
13	Primary Local IP Address
14	Secondary Local IP Address
15	Primary Peer IP Address
16	Secondary Peer IP Address

**Table 5-10 (Cont.) Connection CSV Format**

Column	Data Description
17	Transport Fqdn
18	Peer Identification (Ip, TransportFqdn, PeerFqdn)
19	Local Initiate Port
20	UDP Port
21	Transport Congestion Abatement Timeout
22	Remote Busy Usage (Enabled, Disabled)
23	Remote Busy Timeout
24	Message Priority Setting (None, RequestMessage, UserConfigured)
25	Message Priority Configuration Set
26	Egress Message Throttling Configuration Set
27	Shared Secret Configuration Set
28	Message Authenticator Configuration Set
29	Message Conversion Configuration Set
30	Ingress Status-Server Configuration Set
31	Suppress Connection Unavailable Alarm (Yes, No)
32	Suppress Connections Attempts (Yes, No)
33	Test Mode (Yes, No)

"Connection Configuration Set Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-11](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-11 Connection Configuration Set CSV Format**

Column	Data Description
0	Application Type
1	ConnCfgSet (Keyword)
2	ConnCfgSet Name (Key)
3	retransInitialTimeout
4	retransMinTimeout
5	retransMaxTimeout
6	retransMaxTimeoutInit



**Table 5-11 (Cont.) Connection Configuration Set CSV Format**

Column	Data Description
7	retransPathFailure
8	retransAssocFailure
9	retransInitFailure
10	sackDelay
11	heartbeatInterval
12	sctpSockSendSize
13	sctpSockRecvSize
14	burstMax
15	sctpNumInboundStreams
16	sctpNumOutboundStreams
17	sctpDatagramBundlingEnabled (Yes, No)
18	sctpMaxSegmentSize
19	sctpFragmentationEnabled (Yes, No)
20	sctpDataChunkDeliveryOrdered (Yes, No)
21	tcTimer
22	twinitTimer
23	tcexTimer
24	tdpxTimer
25	provingMode (Always, Suspect, Never)
26	provingTimeout
27	provingDwrsToSend
28	pendTransPerConn
29	cexHostIpValidationEnabled(Yes, No)
30	nagleEnabled (Yes, No)
31	tcpSockSendSize
32	tcpSockRecvSize
33	tcpMaxSegmentSize
34	tcpKeepAliveEnabled (Yes, No)
35	tcpKeepAliveIdleTime
36	tcpKeepAliveProbeInterval
37	tcpKeepAliveMaxCount
38	radiusPendTransPerConn

**Table 5-11 (Cont.) Connection Configuration Set CSV Format**

Column	Data Description
39	preventDupEgressRetrans
40	preventDupIngressRetrans
41	cachedResponseDur

"Reroute On Answer Configuration Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-12](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-12 Reroute on Answer CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	RerouteOnAns (Keyword)
2	Answer Result-Code AVP Value
3	Application ID

"System Options Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-13](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-13 System Options CSV Format**

Column	Data Description
0	Application Type
1	Options (Keyword)
2	Fixed Connection Failure Major Aggregation Alarm Threshold
3	Fixed Connection Failure Critical Aggregation Alarm Threshold
4	IPFE Connection Failure Major Aggregation Alarm Threshold
5	IPFE Connection Failure Critical Aggregation Alarm Threshold
6	Peer Node Failure Critical Aggregation Alarm Threshold
7	Route List Failure Critical Aggregation Alarm Threshold
8	Excessive Reroute Onset Threshold
9	Excessive Reroute Abatement Threshold

**Table 5-13 (Cont.) System Options CSV Format**

Column	Data Description
10	Message Copy Feature Enabled (Enabled, Disabled)
11	Message Copy Disable Congestion Level (CL1, CL2)
12	Redirect Answer Processing Enabled (Yes, No)
13	Redirect Application Route Table
14	Redirect Peer Route Table
15	Client Socket Send Buffer Size
16	Client Socket Receive Buffer Size
17	Server Socket Send Buffer Size
18	Server Socket Receive Buffer Size
19	Encode FQDN In Lower Case (Yes, No)
20	Realm Expiration Minor Alarm Set Time
21	Realm Expiration Major Alarm Set Time
22	NGN-PS Admin State (Enabled, Disabled)
23	Minimum Answer Priority
24	Minimum Inviolable Priority
25	NGN-PS Maximum Message Rate Percent
26	NGN-PS Gx Admin State (Enabled, Disabled)
27	NGN-PS Gx ARP1
28	NGN-PS Gx ARP2
29	NGN-PS Gx ARP3
30	NGN-PS Gx ARP4
31	NGN-PS Gx ARP5
32	NGN-PS Gx Advance Priority Type (None, Spr, Hss)
33	NGN-PS Rx Admin State (Enabled, Disabled)
34	NGN-PS Rx MPS AVP Value
35	NGN-PS Cx/Dx Admin State (Enabled, Disabled)
36	NGN-PS Dh/Sh Admin State (Enabled, Disabled)

"DNS Options Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-14](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-14 DNS Options CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	DnsOption (Keyword)
2	Primary IP
3	Secondary IP
4	Query Duration Timer

"CEX Configuration Sets Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-15](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-15 CEX Configuration Set CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	CexCfgSet (Keyword)
2	Name (Key)
3	Dynamic (Yes, No)
4	Selected Application ID [1]
5	Selected Type [1]
6	Selected Vendor ID [1]
	(repeated x 10)
31	Selected Application ID [10]
32	Selected Type [10]
33	Selected Vendor ID [10]
34	Must Application ID [1]
35	Must Type [1]
36	Must Vendor ID [1]
	(repeated x 10)
61	Must Application ID [10]
62	Must Type [10]
63	Must Vendor ID [10]
64	Vendor ID [1]
	(repeated x 10)

**Table 5-15 (Cont.) CEX Configuration Set CSV Format**

Column	Data Description
73	Vendor ID [10]
74	DSR Feature Status AVP (Yes, No)

"Capacity Configuration Sets Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-16](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-16 Capacity Configuration Set CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	CapCfgSet (Keyword)
2	Capacity Configuration Set Name (Key)
3	Reserved Ingress MPS
4	Maximum Ingress MPS
5	Ingress MPS Minor Alarm Threshold
6	Ingress MPS Major Alarm Threshold
7	Ingress MPS Abatement Time
8	Convergence Time

"Application Routing Rules Configuration Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-17](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-17 AppRouteRule CSV Format**

Column	Data Description
0	Application Type
1	AppRouteRule (Keyword)
2	Name (Key)
3	Priority
4	param (DestHost, DestRealm, OrigHost, OrigRealm, CmdCode AppID)
5	condOperator (Present, Absent, Equal, Not Equal, StartsWith, EndsWith, DontCare, Always True)
6	Value

**Table 5-17 (Cont.) AppRouteRule CSV Format**

Column	Data Description
7	param (DestHost, DestRealm, OrigHost, OrigRealm, CmdCode AppID)
8	condOperator (Present, Absent, Equal, Not Equal, StartsWith, EndsWith, DontCare, Always True)
9	Value
10	param (DestHost, DestRealm, OrigHost, OrigRealm, CmdCode AppID)
11	condOperator (Present, Absent, Equal, Not Equal, StartsWith, EndsWith, DontCare, Always True)
12	Value
13	param (DestHost, DestRealm, OrigHost, OrigRealm, CmdCode AppID)
14	condOperator (Present, Absent, Equal, Not Equal, StartsWith, EndsWith, DontCare, Always True)
15	Value
16	param (DestHost, DestRealm, OrigHost, OrigRealm, CmdCode AppID)
17	condOperator (Present, Absent, Equal, Not Equal, StartsWith, EndsWith, DontCare, Always True)
18	Value
19	param (DestHost, DestRealm, OrigHost, OrigRealm, CmdCode AppID)
20	condOperator (Present, Absent, Equal, Not Equal, StartsWith, EndsWith, DontCare, Always True)
21	Value
22	Application Name
23	Action (Route to Application, Forward To Egress Routing, Send Answer, Abandon With No Answer, Forward To Application Route Table, Forward To Peer Route Table)
24	Target Route Table Name (Application Route Table Name/Peer Route Table Name)
25	Answer Result-Code Value
26	Vendor Id

**Table 5-17 (Cont.) AppRouteRule CSV Format**

Column	Data Description
27	Answer Error Message
28	Gx-Prime (No, Yes)
29	Application Route Table

"Application Ids Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-18](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-18 Application ID CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	Appids (Keyword)
2	Application ID
3	Name

"CEX Parameters elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-19](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-19 CEX Parameters CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	CexParameters (Keyword)
2	Application ID
3	Application ID Type (Authentication, Accounting)
4	Vendor ID

"Pending Answer Timers Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-20](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-20 Pending Answer Timer CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	PendingAnswerTimer (Keyword)
2	Name (Key)
3	Timer

"Routing Option Set Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-21](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-21 Routing Option Set CSV Format**

Column	Data Description
0	Application Type
1	RoutingOptionSet (Keyword)
2	Name (Key)
3	Maximum Per Message Forwarding Allowed
4	Transaction Lifetime
5	Pending Answer Timer
6	Resource Exhausted Action
7	Resource Exhaustion Result Code
8	Resource Exhausted Error Message
9	Resource Exhausted Vendor Id
10	No Peer Response Action
11	No Peer Response Result Code
12	No Peer Response Error Message
13	No Peer Response Vendor Id
14	Connection Failure Action
15	Connection Failure Result Code
16	Connection Failure Error Message
17	Connection Failure Vendor Id
18	Connection Congestion Action
19	Connection Congestion Result Code
20	Connection Congestion Error Message
21	Connection Congestion Vendor Id
22	Peer Node Reported Congestion Action
23	Peer Node Reported Congestion Result Code
24	Peer Node Reported Congestion Error Message
25	Peer Node Reported Congestion Vendor Id
26	Destination Realm Not Served Action
27	Destination Realm Not Served Result Code
28	Destination Realm Not Served Error Message



**Table 5-21 (Cont.) Routing Option Set CSV Format**

Column	Data Description
29	Destination Realm Not Served Vendor Id
30	Nested ART/PRT Error Action
31	Nested ART/PRT Error Result Code
32	Nested ART/PRT Error Message
33	Nested ART/PRT Error Vendor Id

"Peer Route Tables Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-22](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-22 Peer Route Table CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	PeerRouteTable (Keyword)
2	Name (Key)

"Message Priority Configuration Set Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-23](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-23 Message Priority Configuration Set CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	MsgPriorityCfgSet (Keyword)
2	Name
3	applId[1]
4	cmdCode[1]
5	msgPriority[1]
	(repeated x 50)
151	applId[50]
152	cmdCode[50]
153	msgPriority[50]

"Message Throttling Configuration Set Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-24](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-24 Message Throttling Configuration Set CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	MsgThrottlingCfgSet (Keyword)
2	Name (Key)
3	maxEMR
4	smoothFactor
5	abateTime
6	TT1
7	AT1
8	TT2
9	AT2
10	TT3
11	AT3

"Message Copy Configuration Set Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-25](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-25 MessagecopyCfgSet CSV Format**

Column	Data Description
0	Application Type
1	MessagecopyCfgSet (Keyword)
2	Message Copy Configuration Set Name
3	Message Copy Request Type
4	Original Answer Result Code for Message Copy
5	Route List of the DAS node
6	Ingress Answer Included (No, Yes)
7	DAS Answer Result Code
8	Max DAS Retransmission Attempts

"Application Route Tables elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-26](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-26 Application Route Table CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	ApplicationRouteTable (Keyword)
2	Name (Key)

"Command Codes elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-27](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-27 Command Code CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	CmdCodes (Keyword)
2	cmdCode
3	name

Troubleshooting with IDIH "Traces elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-28](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-28 Trace CSV Format**

Column	Data Description
0	Application Type
1	Trace (Keyword)
2	Trace Name (Key)
3	Trace Location
4	Scope Type
5	Scope Value
6	Number of Matches
7	Time of Duration
8	Content Type
9	Condition 1 Name
10	Condition 1 AVP
11	Condition 1 Operator
12	Condition 1 Value
	(repeated x 13)

**Table 5-28 (Cont.) Trace CSV Format**

Column	Data Description
57	Condition 13 Name
58	Condition 13 AVP
59	Condition 13 Operator
60	Condition 13 Value
61	Notes

Troubleshooting with IDIH "Options elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-29](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-29 Trace Options CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	TraceOptions (Keyword)
2	Max Bandwidth
3	IDIH IP Address
4	IDIH Visualization IP address

Troubleshooting with IDIH "Global Options elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-30](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-30 Trace Global Options CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	TraceGlobalOptions (Keyword)
2	Max Active Network Traces

"Trusted Network Lists elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-31](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-31 Trusted Network List CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	TrustedNetworkList (Keyword)

**Table 5-31 (Cont.) Trusted Network List CSV Format**

Column	Data Description
2	Name (Key)
3	trustedRealm [1] (repeated x 100)

"Path Topology Hiding Configuration Sets Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-32](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-32 Path Topology Hiding Configuration Set CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	PathTopologyHidingCfgSet (Keyword)
2	Name (Key)
3	hostnameSuffix (repeated x 10)
13	pseudoRouteRecord
14	pseudoProxy
15	encryptionKey

"S6a/S6d Topology Hiding Configuration Sets Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-33](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-33 S6a/S6d HSS Topology Hiding Configuration Set CSV Format**

Column	Data Description
0	Application Type
1	HssTopologyHidingCfgSet (Keyword)
2	Name (Key)
3	useSingleHssPseudoHostname
4	singleHssPseudoHostname
5	count
6	randomizeCount
7	autoGenerate
8	prefix

**Table 5-33 (Cont.) S6a/S6d HSS Topology Hiding Configuration Set CSV Format**

Column	Data Description
9	suffix
10	length
11	action (SendAnswer, Forward, Abandon)
12	resultCode
13	vendorId
14	errMsg
15	actualHostname
16	pseudoHostname1
17	pseudoHostname2
18	pseudoHostname3
	(combination of actual and pseudo hostnames repeated x 500)

"MME/SGSN Topology Hiding Configuration Sets Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-34](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-34 MME/SGSN Topology Hiding Configuration Set CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	MmeTopologyHidingCfgSet (Keyword)
2	Name (Key)
3	count
4	randomizeCount
5	autoGenerate
6	prefix
7	suffix
8	length
9	Action (SendAnswer, Forward, Abandon)
10	resultCode
11	vendorId
12	errMsg
13	actualHostname[1]

**Table 5-34 (Cont.) MME/SGSN Topology Hiding Configuration Set CSV Format**

Column	Data Description
14	pseudoHostname1
15	pseudoHostname2
16	pseudoHostname3 (combination of actual and pseudo hostnames repeated x 300)

"S9 PCRF Topology Hiding Configuration Sets Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-35](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-35 S9 PCRF Topology Hiding Configuration Set CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	S9PcrfTopologyHidingCfgSet (Keyword)
2	Name (Key)
3	count
4	randomizeCount
5	autoGenerate
6	prefix
fe7	suffix
8	length
9	action (SendAnswer, Forward, Abandon)
10	resultCode
11	vendorId
12	errMsg
13	actualHostname
14	pseudoHostname1
15	pseudoHostname2
16	pseudoHostname3 (combination of actual and pseudo hostnames repeated x 600)

"S9 AF/pCSCF Topology Hiding Configuration Sets Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-36](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-36 S9 AF/pCSCF Topology Hiding Configuration Set CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	S9AfPcscfTopologyHidingCfgSet (Keyword)
2	Name (Key)
3	count
4	randomizeCount
5	autoGenerate
6	prefix
7	suffix
8	length
9	Action (SendAnswer, Forward, Abandon)
10	resultCode
11	vendorId
12	errMsg
13	actualHostname[1]
14	pseudoHostname1
15	pseudoHostname2
16	pseudoHostname3
	(combination of actual and pseudo hostnames repeated x 500)

"Protected Network Configuration Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-37](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-37 Protected Network CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	ProtectedNetwork (Keyword)
2	protectedRealm (Key)
3	trustedNetList
4	pathTopologyHidingCfgSet
5	mmeTopologyHidingCfgSet
6	hssTopologyHidingCfgSet



**Table 5-37 (Cont.) Protected Network CSV Format**

Column	Data Description
7	S9PcrfTopologyHidingCfgSet
8	S9AfPcscfTopologyHidingCfgSet

**Diameter Common CSV File Formats**

The following tables describe the CSV file content and attribute field or column positions for all Diameter Common configuration data supported by the **Diameter** Application Type.

"MCCMNC Elements" describes the configuration data elements listed in [Table 5-38](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-38 MCCMNC CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	MccMnc (Keyword)
2	Mobile Country Code (MCC)
3	Mobile Network Code (MNC)
4	Country Name
5	Network Name

"MCCMNC Mapping Elements" describes the configuration data elements listed in [Table 5-39](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-39 MCCMNC Mapping CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	MccMncMapping (Keyword)
2	Mobile Country Code (MCC)
3	Mobile Network Code (MNC)
4	Prefix
5	Country Name
6	Network Name
7	CCNDC
8	Realm
9	Description

"MCC Ranges Elements" describes the configuration data elements listed in [Table 5-40](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-40 Reserved MCC Ranges CSV Format**

Column	Data Description
0	Application Type (Diameter)
1	ReservedMccRanges (Keyword)
2	startMccRange
3	endMccRange

"Transaction Configuration Set Elements" describes the configuration data elements list in [Table 5-41](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-41 Transaction Configuration Group CSV Format**

Column	Data Description
0	Application Type
1	TransactionConfigurationSet(Keyword)
2	Name(Key)

"Transaction Configuration Rule Elements" describes the configuration data elements listed in [Table 5-42](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-42 Transaction Configuration Rule CSV Format**

Column	Data Description
0	Application Type
1	TransactionConfigurationRule(Keyword)
2	Name(Key)
3	appId
4	cmdCode
5	routingOptionSet
6	pendingAnswerTimer
7	applicationRouteTable
8	peerRouteTable
9	transactionCfgSet

"MP Profiles Elements" describes the editable configuration data elements listed in [Table 5-43](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-43 MP Profile Parameters CSV Record Format**

Column	Data Description
0	Application Type (Diameter)
1	MpProfileRwParm (Keyword)
2	profileName (key)
3	key (key)
4	value

"MP Profile Assignments Elements" describes the configuration data elements listed in [Table 5-44](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-44 MP Profile Assignments CSV Record Format**

Column	Data Description
0	Application Type (Diameter)
1	MpProfileAssignment (Keyword)
2	nodeName (key)
3	profileName

"Rate Limiting Configuration Elements" describes the configuration data elements listed in [Table 5-45](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-45 Rate Limiting Configuration CSV Record Format**

Column	Data Description
0	Application Type
1	RateCfgSet (Keyword)
2	Name (Key)
3	Maximum Egress Rate
4	RateConvergenceTime
5	RateAbatementTime
6	RateOnsetThres1
7	RateAbateThres1
8	RateOnsetThres2
9	RateAbateThres2
10	RateOnsetThres3
11	RateAbateThres3

"Pending Transaction Limiting Configuration Elements" describes the configuration data elements listed in [Table 5-46](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-46 Pending Transaction Limiting Configuration CSV Record Format**

Column	Data Description
0	Application Type
1	PendTransCfgSet (Keyword)
2	Name (Key)
3	Maximum Number of Pending Transactions
4	PendTransOnsetThres1
5	PendTransAbateThres1
6	PendTransOnsetThres2
7	PendTransAbateThres2
8	PendTransOnsetThres3
9	PendTransAbateThres3
10	PendTransAbateTime3

"Egress Throttle List Elements" describes the configuration data elements listed in [Table 5-47](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-47 Egress Throttle List CSV Record Format**

Column	Data Description
0	Application Type
1	Etl (Keyword)
2	Name (Key)
3	siteName_1
4	etgName_1
5	connFailPctReduction_1
6	siteName_2
7	etgName_2
8	connFailPctReduction_2
9	siteName_3
10	etgName_3
11	connFailPctReduction_3
12	RateCfgSet
13	PendTransCfgSet

"Egress Throttle Group Elements" in the *Diameter User Guide* and Help describes the configuration data elements listed in [Table 5-48](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-48 Egress Throttle Group CSV Format**

Column	Data Description
0	Application Type
1	Etg (Keyword)
2	Name (Key)
3	EtgControlScope
4	RateCfgSet
5	PendTransCfgSet
6	Peers
	(repeated x 128)
133	Conns
	(repeated x 128)

"Dashboard Network Elements" describes the configuration data elements listed in [Table 5-49](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-49 Dashboard Network CSV Format**

Column	Data Description
0	Application Type
1	DshNetwork (Keyword)
2	Network Name (always "Network" in DSR 7.1)
3	SOAM Server Group #1 Name
4	SOAM Server Group #1 Display Order
5-66	(31 additional SOAM SG pairs of rows)
67	Summary Threshold Configuration Set Name

"Dashboard Network Element Elements" describes the configuration data elements listed in [Table 5-50](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-50 Dashboard Network Element CSV Format**

Column	Data Description
0	Application Type
1	DshNe (Keyword)

**Table 5-50 (Cont.) Dashboard Network Element CSV Format**

Column	Data Description
2	Network Element Name
3	Server Threshold Configuration Set Name (empty or "ServerThresholds" in DSR 7.1)
4	Summary Threshold Configuration Set Name
5	Display Administratively Disabled Servers ("Yes"/"No")

"Dashboard Metric Group Elements" describes the configuration data elements listed in [Table 5-51](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-51 Dashboard Metric Group CSV Format**

Column	Data Description
0	Application Type
1	DshMetricGroup (Keyword)
2	Metric Group Name
3	Metric #1 Name
4	Metric #1 Display on Dashboard ("Yes"/"No")
5-30	(13 additional SOAM SG pairs of rows)

"Dashboard Metric Threshold Configuration Set Elements" describes the configuration data elements listed in [Table 5-52](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-52 Dashboard Metric Threshold Configuration Set CSV Format**

Column	Data Description
0	Application Type
1	DshMetricThresholdCfgSet (Keyword)
2	MTCfgSet Name
3	MTCfgSet Type ("Server"/"Summary")
4	Metric #1 Name
5	Metric #1 Threshold 1
6	Metric #1 Threshold 2
7	Metric #1 Threshold 3
8	Metric #2 Name
9	Metric #2 Threshold 1

**Table 5-52 (Cont.) Dashboard Metric Threshold Configuration Set CSV Format**

Column	Data Description
10	Metric #2 Threshold 2
11	Metric #2 Threshold 3
12-239	(57 additional groups of 4 rows per engineering-configured Metric)

"AVP Removal List Elements" describes the configuration data elements listed in [Table 5-53](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-53 AvpRemovalList CSV Format**

Column	Data Description
0	Application Type
1	AvpRemovalList (Keyword)
2	Name (Key)
3	Direction
4	Message Type
5	AVP Code_1
6	AVP Name_1
7	Vendor Id_1
8	Vendor Name_1
	(repeated x 10)
41	AVP Code_10
42	AVP Name_10
43	Vendor Id_10
44	Vendor Name_10

"Discovery Attributes Elements" describes the configuration data elements listed in [Table 5-54](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-54 DpdAttribute CSV Format**

Column	Data Description
0	Application Type
1	DpdAttributeSet (Keyword)
2	Realm Name
3	DNS Set

**Table 5-54 (Cont.) DpdAttribute CSV Format**

Column	Data Description
4	Local Node
5	Connection Mode
6	Local Protocol Preference Override (No, Yes)
7	Application Id[1]
8	Application Type[1]
9	Vendor Id[1]
10	TCP Preference[1]
11	SCTP Preference[1]
12	TLS Preference[1]
13	DTLS Preference[1]
14	Max Num Peers[1]
15	Max Num Connections[1]
	(repeated x 10)
88	Application Id[10]
89	Application Type[10]
90	Vendor Id[10]
91	TCP Preference[10]
92	SCTP Preference[10]
93	TLS Preference[10]
94	DTLS Preference[10]
95	Max Num Peers[10]
96	Max Num Connections[10]
97	Local IP Address
98	IPFE Initiator DAMP
99	Connection Configuration Set
100	Capacity Configuration Set
101	Realm Prefix

"DNS Set Elements" describes the configuration data elements listed in [Table 5-55](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.



**Table 5-55 DpdDnsSet CSV Format**

Column	Data Description
0	Application Type
1	DpdDnsSet (Keyword)
2	DNS Set Name (Key)
3	Primary DNS Server IP Address
4	Secondary DNS Server IP Address
5	DNS Query Timeout
6	Number Of Retries

"Dynamic Peer Discovery Realms Elements" describes the configuration data elements listed in [Table 5-56](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-56 DpdRealm CSV Format**

Column	Data Description
0	Application Type
1	DpdRealm (Keyword)
2	Realm Name

"Traffic Throttle Group Elements" describes the configuration data elements listed in [Table 5-57](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-57 TrafficThrottleGroup CSV Format**

Column	Data Description
0	Application Type
1	TrafficThrottleGroup (Keyword)
2	Name (Key)
3	Traffic Throttle Point [1] (repeated x 20)
22	Traffic Throttle Point [20]
23	Application ID
24	Shared (No, Yes)

"Traffic Throttle Point Elements" describes the configuration data elements listed in [Table 5-58](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-58 TrafficThrottlePoint CSV Format**

Column	Data Description
0	Application Type
1	TrafficThrottlePoint (Keyword)
2	Name (Key)
3	TTP Configuration Set
4	Max Loss Percent Threshold
5	Alternate Implicit Route
6	Peer Node
7	Application Id
8	Max ETR

"Traffic Throttle Point Configuration Elements" describes the configuration data elements listed in [Table 5-59](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-59 TrafficThrPointCfgSet CSV Format**

Column	Data Description
0	Application Type
1	TrafficThrPointCfgSet (Keyword)
2	Name (Key)
3	Diversion Policy
4	Abatement Recovery Rate
5	Override Message Priority Threshold
6	Default Reduction Percentage
7	Default Validity Duration
8	Rate Convergence Time

Diameter Signaling Firewall Elements describes the configuration data elements listed in [Table 5-60](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-60 Signaling Firewall CSV Format**

Column	Data Description
0	Application Type
1	Signaling Firewall (Keyword)
2	Signaling Node Name

**Table 5-60 (Cont.) Signaling Firewall CSV Format**

Column	Data Description
3	Signaling Firewall Administrative State

### Range Based Address Resolution (RBAR) CSV File Formats and Contents

The following tables describe the CSV file content and attribute column positions for all configuration data supported by the RBAR Application Type.

---

**Note:** Address Individual and Address Range elements are in different CSV files for performance reasons.

---

"Applications configuration elements" in the RBAR Help describes the configuration data elements listed in [Table 5-61](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-61 Supported Application CSV Format**

Column	Data Description
0	Application Type (Rbar)
1	SuppAppl (Keyword)
2	Application ID
3	Routing Mode (Proxy)

"Addresses configuration elements" in the RBAR Help describes the configuration data elements listed in [Table 5-62](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-62 Address Individual CSV Format**

Column	Data Description
0	Application Type (Rbar)
1	AddressIndv (Keyword)
2	Table Name
3	Address
4	Destination
5	Pfx Length
6	Old Table Name
7	Old Address
8	Old Pfx Length

"Addresses configuration elements" in the RBAR Help describes the configuration data elements listed in [Table 5-63](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-63 Address Range CSV Format**

Column	Data Description
0	Application Type (Rbar)
1	AddressRange (Keyword)
2	Table Name
3	Start Address
4	End Address
5	Destination
6	Pfx Length
7	Old Table Name (Key)
8	Old Start Address (Key)
9	Old Pfx Length (Key)

"Address Tables configuration elements" in the RBAR Help describes the configuration data elements listed in [Table 5-64](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-64 Address Table CSV Format**

Column	Data Description
0	Application Type (Rbar)
1	AddressTable (Keyword)
2	Name
3	Comment
4	Routing Entity (Imsi, Msisdn, Impi, Impu, ExternalId, Ipv4, Ipv6PfxAddr, Unsigned16)

"Destinations configuration elements" in the RBAR Help describes the configuration data elements listed in [Table 5-65](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-65 Destination Table CSV Format**

Column	Data Description
0	Application Type (Rbar)
1	Destination (Keyword)
2	Name (Key)
3	Realm

**Table 5-65 (Cont.) Destination Table CSV Format**

Column	Data Description
4	Fqdn
5	Avp Insertion (No, Yes)

"Exceptions configuration elements" in the RBAR Help describes the configuration data elements listed in [Table 5-66](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-66 Routing Exception CSV Format**

Column	Data Description
0	Application Type (Rbar)
1	RoutingException (Keyword)
2	Application ID
3	Exception Type (UnknownCmdCode, NoRoutingEntityAddress, NoDrtEntry)
4	Action (FwdUnchanged, FwdToDest, SendAnswer, SendAnsExp)
5	Destination Name
6	Answer Result Code
7	Vendor ID
8	Error Message

"Address Resolutions configuration elements" in the RBAR Help describes the configuration data elements listed in [Table 5-67](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-67 Address Resolution CSV Format**

Column	Data Description
0	Application Type (Rbar)
1	Resolution (Keyword)
2	Application ID
3	CMD Code
4	Routing Entity 1 (Imsi, Msisdn, Impi, Impu, Ipv4, Ipv6PfxAddr, Unsigned16, ExternalId)

**Table 5-67 (Cont.) Address Resolution CSV Format**

Column	Data Description
5	Re 1 Avp 1 (PublicIdentity, SvcInfoSubscrId0, SvcInfoSubscrId1, SvcInfoSubscrId2, SvcInfoSubscrId3, SvcInfoSubscrId4, SubscriptionId0, SubscriptionId1, SubscriptionId2, SubscriptionId3, SubscriptionId4, UserIdentityMsisdn, UserIdentityPublic, UserIdentifierExternalId, UserName, FramedIpAddress, FramedIpv6Prefix, SvcInfoPsInfo3gppcc, Unprovisioned)
6	Re 1 Avp 2 (PublicIdentity, SvcInfoSubscrId0, SvcInfoSubscrId1, SvcInfoSubscrId2, SvcInfoSubscrId3, SvcInfoSubscrId4, SubscriptionId0, SubscriptionId1, SubscriptionId2, SubscriptionId3, SubscriptionId4, UserIdentityMsisdn, UserIdentityPublic, UserIdentifierExternalId, UserName, FramedIpAddress, FramedIpv6Prefix, SvcInfoPsInfo3gppcc, Unprovisioned)
7	Re 1 Address Table Name
8	Routing Entity 2 (Imsi, Msisdn, Impi, Impu, Ipv4, Ipv6PfxAddr, Unsigned16, ExternalId)
9	Re 2 Avp 1 (PublicIdentity, SvcInfoSubscrId0, SvcInfoSubscrId1, SvcInfoSubscrId2, SvcInfoSubscrId3, SvcInfoSubscrId4, SubscriptionId0, SubscriptionId1, SubscriptionId2, SubscriptionId3, SubscriptionId4, UserIdentityMsisdn, UserIdentityPublic, UserIdentifierExternalId, UserName, FramedIpAddress, FramedIpv6Prefix, SvcInfoPsInfo3gppcc, Unprovisioned)
10	Re 2 Avp 2 (PublicIdentity, SvcInfoSubscrId0, SvcInfoSubscrId1, SvcInfoSubscrId2, SvcInfoSubscrId3, SvcInfoSubscrId4, SubscriptionId0, SubscriptionId1, SubscriptionId2, SubscriptionId3, SubscriptionId4, UserIdentityMsisdn, UserIdentityPublic, UserIdentifierExternalId, UserName, FramedIpAddress, FramedIpv6Prefix, SvcInfoPsInfo3gppcc, Unprovisioned)
11	Re 2 Address Table name
12	Routing Entity 3 (Imsi, Msisdn, Impi, Impu, Ipv4, Ipv6PfxAddr, Unsigned16, ExternalId )

**Table 5-67 (Cont.) Address Resolution CSV Format**

Column	Data Description
13	Re 3 Avp 1 (PublicIdentity, SvcInfoSubscrId0, SvcInfoSubscrId1, SvcInfoSubscrId2, SvcInfoSubscrId3, SvcInfoSubscrId4, SubscriptionId0, SubscriptionId1, SubscriptionId2, SubscriptionId3, SubscriptionId4, Msisdn, UserIdentityMsisdn, UserIdentifier Msisdn, UserIdentity Public, UserIdentifierExternalId , UserIdentifierUserName, UserName, FramedIpAddress, FramedIpv6Prefix, SvcInfoPsInfo3gppcc, Unprovisioned)
14	Re 3 Avp 2 (PublicIdentity, SvcInfoSubscrId0, SvcInfoSubscrId1, SvcInfoSubscrId2, SvcInfoSubscrId3, SvcInfoSubscrId4, SubscriptionId0, SubscriptionId1, SubscriptionId2, SubscriptionId3, SubscriptionId4, Msisdn, UserIdentityMsisdn, UserIdentifier Msisdn, UserIdentity Public, UserIdentifierExternalId , UserIdentifierUserName, UserName, FramedIpAddress, FramedIpv6Prefix, SvcInfoPsInfo3gppcc, Unprovisioned)
15	Re 3 Address Table name

"System Options elements" in the RBAR Help describes the configuration data elements listed in [Table 5-68](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-68 Option CSV Format**

Column	Data Description
0	Application Type (Rbar)
1	Option (Keyword)
2	Uri Supported (No, Yes)
3	RemoveDestHost (No, Yes)
4	Exclude Space (No, Yes)
5	Allow SubsequentDSR App Invoc (No, Yes)
6	Realm
7	Fqdn
8	Resource Exhaustion Error Code
9	Resource Exhaustion Error Message

**Table 5-68 (Cont.) Option CSV Format**

Column	Data Description
10	Resource Exhaustion Vendor ID
11	Unavailable Application Action (ContinueRouting, DefaultRoute, SendAnswer, SendAnsExp)
12	Unavailable Application Route List
13	Unavailable Application Result Code
14	Unavailable Application Error Message
15	Unavailable Application Vendor ID
16	ASCII Excluded List [0]  (repeated x 20) . . .
35	ASCII Excluded List [19]
36	TBCD Excluded List [0]  (repeated x 5) . . .
40	TBCD Excluded List [4]

## Full Address Based Resolution (FABR) CSV File Formats and Contents

### Full Address-Based Resolution (FABR) CSV File Formats

The following tables describe the CSV file content and attribute column positions for all configuration data supported by the FABR Application Type.

"Applications configuration elements" in the FABR Help describes the configuration data elements listed in [Table 5-69](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-69 Supported Application CSV Format**

Column	Data Description
0	Application Type (Fabr)
1	SuppAppl (Keyword)
2	Application ID
3	Routing Mode (Proxy)

"Exceptions configuration elements" in the FABR Help describes the configuration data elements listed in [Table 5-70](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.



**Table 5-70 Routing Exception CSV Format**

Column	Data Description
0	Application Type (Fabr)
1	RoutingException (Keyword)
2	Application ID
3	Exception Type (UnknownCmdCode, NoRoutingEntityAddress, NoAddrMatch, DpErrors, DpCongestion)
4	Action (FwdUnchanged, FwdToDest, SendAnswer, SendAnsExp, AbandonRequest)
5	Destination Name
6	Answer Result Code
7	Vendor ID
8	Error Message

"Destinations configuration elements" in the FABR Help describes the configuration data elements listed in [Table 5-71](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-71 Default Destination Table CSV Format**

Column	Data Description
0	Application Type (Fabr)
1	Destination (Keyword)
2	Name
3	Realm
4	Fqdn

"Address Resolutions configuration elements" in the FABR Help describes the configuration data elements listed in [Table 5-72](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-72 Address Resolution CSV Format**

Column	Data Description
0	Application Type (Fabr)
1	Resolution (Keyword)
2	Application ID
3	CMD Code

**Table 5-72 (Cont.) Address Resolution CSV Format**

Column	Data Description
4	Routing Entity 1 (Imsi, Msisdn, Impi, Impu, ExternalId)
5	Re 1 Avp 1 (PublicIdentity, SvcInfoSubscrId0, SvcInfoSubscrId1, SvcInfoSubscrId2, SvcInfoSubscrId3, SubscriptionId0, SubscriptionId1, SubscriptionId2, SubscriptionId3, Msisdn, UserIdentityMsisdn, UserIdentifierMsisdn, UserIdentityPublic, UserIdentifierExternalId , UserIdentifierUserName, UserName, WildCardedPubIdnty)
6	Re 1 Avp 2 (PublicIdentity, SvcInfoSubscrId0, SvcInfoSubscrId1, SvcInfoSubscrId2, SvcInfoSubscrId3, SubscriptionId0, SubscriptionId1, SubscriptionId2, SubscriptionId3, Msisdn, UserIdentityMsisdn, UserIdentifierMsisdn, UserIdentityPublic, UserIdentifierExternalId , UserIdentifierUserName, UserName, WildCardedPubIdnty)
7	Re 1 Destination Type (MtcHss, ImsHss, LteHss, Pcrf, Ocs, Ofcs, Aaa, UserDefined1, UserDefined2)
8	Routing Entity 2 (Imsi, Msisdn, Impi, Impu, ExternalId)
9	Re 2 Avp 1 (PublicIdentity, SvcInfoSubscrId0, SvcInfoSubscrId1, SvcInfoSubscrId2, SvcInfoSubscrId3, SubscriptionId0, SubscriptionId1, SubscriptionId2, SubscriptionId3, Msisdn, UserIdentityMsisdn, UserIdentifierMsisdn, UserIdentityPublic, UserIdentifierExternalId , UserIdentifierUserName, UserName, WildCardedPubIdnty)
10	Re 2 Avp 2 (PublicIdentity, SvcInfoSubscrId0, SvcInfoSubscrId1, SvcInfoSubscrId2, SvcInfoSubscrId3, SubscriptionId0, SubscriptionId1, SubscriptionId2, SubscriptionId3, Msisdn, UserIdentityMsisdn, UserIdentifierMsisdn, UserIdentityPublic, UserIdentifierExternalId , UserIdentifierUserName, UserName, WildCardedPubIdnty)
11	Re 2 Destination Type (MtcHss, ImsHss, LteHss, Pcrf, Ocs, Ofcs, Aaa, UserDefined1, UserDefined2)

**Table 5-72 (Cont.) Address Resolution CSV Format**

Column	Data Description
12	Routing Entity 1 Search Prefix (Yes, No)
13	Routing Entity 2 Search Prefix (Yes, No)
14	Routing Entity 1 Search Blacklist (Yes, No)
15	Routing Entity 2 Search Blacklist (Yes, No)
16	Routing Entity 3 (Imsi, Msisdn, Impi, Impu, ExternalId)
17	Re 3 Avp 1 (PublicIdentity, SvcInfoSubscrId0, SvcInfoSubscrId1, SvcInfoSubscrId2, SvcInfoSubscrId3, SubscriptionId0, SubscriptionId1, SubscriptionId2, SubscriptionId3, Msisdn, UserIdentityMsisdn, UserIdentifierMsisdn, UserIdentityPublic, UserIdentifierExternalId, UserIdentifierUserName, UserName, WildCardedPubIdnty)
18	Re 3 Avp 2 (PublicIdentity, SvcInfoSubscrId0, SvcInfoSubscrId1, SvcInfoSubscrId2, SvcInfoSubscrId3, SubscriptionId0, SubscriptionId1, SubscriptionId2, SubscriptionId3, Msisdn, UserIdentityMsisdn, UserIdentifierMsisdn, UserIdentityPublic, UserIdentifierExternalId, UserIdentifierUserName, UserName, WildCardedPubIdnty)
19	Re 3 Destination Type ( MtcHss, ImsHss, LteHss, Pcrf, Ocs, Ofcs, Aaa, UserDefined1, UserDefined2)
20	Routing Entity 3 Search Prefix (Yes, No)
21	Routing Entity 3 Search Blacklist (Yes, No)

"System Options elements" in the FABR Help describes the configuration data elements listed in [Table 5-73](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-73 Option CSV Format**

Column	Data Description
0	Application Type (Fabr)
1	Option (Keyword)
2	RemoveDestHost (No, Yes)
3	Exclude Space (No, Yes)
4	Allow SubsequentDSR App Invoc (No, Yes)

**Table 5-73 (Cont.) Option CSV Format**

Column	Data Description
5	Realm
6	Fqdn
7	Resource Exhaustion Error Code
8	Resource Exhaustion Error Message
9	Resource Exhaustion Vendor ID
10	Unavailable Application Action (ContinueRouting, DefaultRoute, SendAnswer, SendAnsExp)
11	Unavailable Application Route List
12	Unavailable Application Result Code
13	Unavailable Application Error Message
14	Unavailable Application Vendor ID
15	ASCII Excluded List [0] (repeated x 20) . . .
33	ASCII Excluded List [19]
35	TBCD Excluded List [0] (repeated x 5) . . .
39	TBCD Excluded List [4]
40	Bundling Enabled (Yes, No)
41	Max Bundle Size
42	Prefix Search Enabled (Yes, No)
43	Blacklist Search Enabled (Yes, No)

### Charging Proxy Application (CPA) CSV File Formats and Contents

#### Charging Proxy Application (CPA) CSV File Formats

The following tables describe the CSV file content and attribute column positions for all configuration data supported by the CPA Application Type.

"System Options configuration elements" in the Charging Proxy Application (CPA) Help describes the configuration data elements listed in [Table 5-74](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-74 System Option CSV Format**

Column	Data Description
0	Application Type (Cpa)

**Table 5-74 (Cont.) System Option CSV Format**

Column	Data Description
1	Option (Keyword)
2	unavailableAction (SendAnswer)
3	unavailableAppResultCode
4	unavailableActionVendorId
5	unavailableActionErrorMessage
6	application InvokedAvpInsertion (Yes, No)
7	shutdownMode (Graceful, Force)
8	shutdownTimer
9	generateAnswerResultCode
10	generateAnswerVendorId
11	generateAnswerErrorMessage
12	behaviorIfSessionLookupError (GenerateAnswer, ContinueRouting)

"Message Copy elements" in the Charging Proxy Application (CPA) Help describes the **Message Copy** configuration data elements listed in [Table 5-75](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-75 Message Copy CSV Format**

Column	Data Description
0	Application Type (Cpa)
1	Messagecopy (Keyword)
2	messageCopyStatus
3	messageCopyRouteList1
4	messageCopyRouteList2
5	messageCopyRouteList3
6	messageCopyRouteList4
7	messageCopyRouteList5
8	messageCopyRouteList6
9	messageCopyRouteList7
10	messageCopyRouteList8
11	messageCopyRouteList9
12	messageCopyRouteList10

**Table 5-75 (Cont.) Message Copy CSV Format**

Column	Data Description
13	calledStationIdString1
14	calledStationIdString2
15	calledStationIdString3
16	calledStationIdString4

"SBR elements" describes the **Session Binding Repository (SBR)** configuration data elements listed in [Table 5-76](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-76 SBR CSV Format**

Column	Data Description
0	Application Type (Sbr)
1	Sbrconfig (Keyword)
2	sbdbAuditStartTime
3	sbdbAuditStopTime
4	staleSbdbSessionBindingAge
5	maximumActiveSessionBindings
6	mostlyStalePercent

### Charging Session Binding Repository (CSBR) CSV File Formats and Contents

The following tables describe the CSV file content and attribute column positions for all configuration data supported by the SBR.

"SBR elements" describes the **Session Binding Repository (SBR)** configuration data elements listed in [Table 5-76](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-77 SBR CSV Format**

Column	Data Description
0	Application Type (CSBR)
1	Sbrconfig (Keyword)
2	sbdbAuditStartTime
3	sbdbAuditStopTime
4	staleSbdbSessionBindingAge
5	maximumActiveSessionBindings
6	mostlyStalePercent

## IP Front End (IPFE) CSV File Formats and Contents

### IP Front End CSV File Formats

The following tables describe the CSV file content and attribute column positions for all configuration data supported by the IP Front End (IPFE) Application Type.

---

**Note:** Both IPFE CSV formats must be included in the file for an IPFE Import operation (Insert or Delete). Bulk Import for IPFE does not support Insert or Delete for only IpfeOption or only IpfeListTsa.

---

"Configuration Options elements" in the IPFE Help describes the configuration data elements listed in [Table 5-78](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-78 IPFE IpfeOption CSV Format**

Column	Data Description
0	Application Type
1	Options (Keyword)
2	Ipfe1IpAddress
3	Ipfe2IpAddress
4	Ipfe3IpAddress
5	Ipfe4IpAddress
6	StatSyncTcpPort
7	StateSyncReconnectS
8	RejectOption (tcpreset, drop, icmphostunreachable, icmpportunreachable, icmpadminprohibited)
9	SctpRejectOption (drop, icmphostunreachable, icmpportunreachable, icmpadminprohibited)
10	OverloadStart
11	LeastLoadStart
12	GratuitousArpType
13	Accounting Support (enabled, disabled)
14	ConnectTryPort
15	ConnectTimeoutS
16	ConnectTryIntervalS
17	MonitorProtocol (tcpconnectonly, fullmonitoring, disabled)
18	PacketRateLimit

**Table 5-78 (Cont.) IPFE IpfeOption CSV Format**

Column	Data Description
19	Tsa1DeleteAge
20	Tsa1IPAddress
21	Tsa1IPSecondaryAddress
22	Tsa1IPSecondaryPreferredIpfe
23	Tsa1LoadAlgorithm (hash, roundrobin, leasttraff, leastconns, leastload, leastloadtest)
24	Tsa1PreferredIpfe (1, 2, 3, 4)
25	Tsa1Protocols (SCTP, TCP, SCTP_AND_TCP)
26	Tsa1TsDisable (0, 1)
27	Tsa1AllowedDeviation (0-50)
28	Tsa1LoadFactorMPS (0-100)
29	Tsa1LoadFactorConn (0-100)
30	Tsa1PeerGroup (enabled, disabled)
31	Tsa1PeerGroupDelta (1-10)
	(fields 19 thru 31 repeated x 31 times) . . .
422	Tsa32DeleteAge
423	Tsa32IPAddress
424	Tsa32IPSecondaryAddress
425	Tsa32IPSecondaryPreferredIpfe
426	Tsa32LoadAlgorithm (hash, roundrobin, leasttraff, leastconns, leastload, leastloadtest)
427	Tsa32PreferredIpfe
428	Tsa32Protocols (SCTP, TCP, SCTP_AND_TCP)
429	Tsa32TsDisable (0, 1)
430	Tsa32AllowedDeviation (0-50)
431	Tsa32LoadFactorMPS (0-100)
432	Tsa32LoadFactorConn (0-100)
433	Tsa32PeerGroup (enabled, disabled)
434	Tsa32PeerGroupDelta (1-10)

"Target Sets configuration elements" in the IPFE Help describes the configuration data elements listed in [Table 5-79](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.



**Table 5-79 IPFE IpfeListTsa CSV Format**

Column	Data Description
0	Application Type (Ipfe)
1	IPListTsa (Keyword)
2	tsa
3	server
4	ipAddress
5	description
6	ipSecondaryAddress
7	Initiator Port Start
8	Initiator Port Mid
9	Initiator Port End

### Policy and Charging Application (PCA) CSV File Formats and Contents

The following tables describe the CSV file content and attribute column positions for all configuration data supported by the Policy and Charging Application Type.

"PCRFs elements" in the PCA Help describes the configuration data elements listed in [Table 5-80](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-80 PCRFs CSV Format**

Column	Data Description
0	Application Type (Pca - Policy and Charging Application)
1	Pcrf (Keyword)
2	PCRF Peer Node Name (Key)
3	Comments

"Binding Key Priority elements" in the PCA Help describes the configuration data elements listed in [Table 5-81](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-81 Binding Key Priority CSV Format**

Column	Data Description
0	Application Type (Pca - Policy and Charging Application)
1	BindPriority (Keyword)
2	Priority 1

**Table 5-81 (Cont.) Binding Key Priority CSV Format**

Column	Data Description
3	Binding Key Type 1 (Imsi, Msisdn, Ipv4, Ipv6)
4	Priority 2
5	Binding Key Type 2 (Imsi, Msisdn, Ipv4, Ipv6)
6	Priority 3
7	Binding Key Type 3 (Imsi, Msisdn, Ipv4, Ipv6)
8	Priority 4
9	Binding Key Type 4 (Imsi, Msisdn, Ipv4, Ipv6)

"Site Options elements" and "Network-Wide Options elements" in the PCA Help describes the configuration data elements listed in [Table 5-81](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-82 Policy DRA Options CSV Format**

Column	Data Description
0	Application Type (Pca - Policy and Charging Application)
1	PdraOptions (Keyword)
2	Enable Topology Hiding
3	Topology Hiding Scope
4	Default Topology Hiding FQDN
5	Default Topology Hiding Realm
6	Topology Hiding Host
7	Topology Hiding Realm
8	Peer Route Table Name
9	Enable PCRF Pooling
10	PCRF Pooling Mode
11	Default APN for Non Specific Binding Correlation
12	Early Binding Polling Interval
13	Maximum Early Binding Lifetime
14	Suspect Binding Removal Events Ignore Interval
15	Suspect Binding Removal Events Reset Interval

**Table 5-82 (Cont.) Policy DRA Options CSV Format**

Column	Data Description
16	Suspect Binding Removal Events Threshold
17	RAR Origin Host and Realm Option
18	Max Query RAR Rate Per Session Server Group
19	RarAttemptedThreshold
20	Max Release RAR Rate Per Session Server Group
21	Max Attempts Per Release RAR
22	Query RAR Queue Capacity Per Session Server Group
23	Release RAR Queue Capacity Per Session Server Group

"Error Codes elements" in the PCA Help describes the configuration data elements listed in [Table 5-83](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-83 PCA Error Codes CSV Format**

Column	Data Description
0	Application Type (Pca - Policy and Charging Application)
1	ErrorCodes (Keyword)
2	Error Condition (Key) (PdraUnavailCong, PcaFuncUnavailableOrDisabled, BindingNotFound, UnableToRoute, SbrError, BindingKeyNotFoundCondition, SessionNotFound, MissingOrUnconfiguredApn)
3	Gx/Gxx Result Code
4	Gx/Gxx Vendor ID
5	Rx Result Code
6	Rx Vendor ID
7	S9 Result Code
8	S9 Vendor ID
9	Gx-Prime Result Code
10	Gx-Prime Vendor ID
11	Gy/Ro Result Code

**Table 5-83 (Cont.) PCA Error Codes CSV Format**

Column	Data Description
12	Gy/Ro Vendor ID
13	All Result Code
14	All Vendor ID

"PCA Access Point Names elements" in the PCA Help describes the configuration data elements listed in [Table 5-84](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-84 PCA Access Point Names CSV Format**

Column	Data Description
0	Application Type (Pca - Policy and Charging Application)
1	AccessPointName (Keyword)
2	Access Point Name
3	Function Name
4	PCRF Pool Name
5	Maximum Allowed Sessions per IMSI
6	Per IMSI Session Exceeded Treatment (Reject, Route)
7	Stale Session Timeout
8	PCRF Sub-Pool Count (Read Only)
9	Last Updated Timestamp (Read Only)

"Alarm Settings elements" in the PCA Help describes the configuration data elements listed in [Table 5-85](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-85 Alarm Settings CSV Format**

Column	Data Description
0	Application Type (Pca - Policy and Charging Application)
1	AlarmSupp (Keyword)
2	Alarm Name 1 (PcaIngressMessageRate, OutstandingPdcaSessionsThresholdExceeded )
3	Critical Alarm Threshold (Percent) 1
4	Suppress Critical 1 (Yes, No)

**Table 5-85 (Cont.) Alarm Settings CSV Format**

Column	Data Description
5	Major Alarm Threshold (Percent) 1
6	Suppress Major 1 (Yes, No)
7	Minor Alarm Threshold (Percent) 1
8	Suppress Minor 1 (Yes, No)
9	Alarm Name 2 (PsbrActiveSessionsThreshold)
10	Critical Alarm Threshold (Percent) 2
11	Suppress Critical 2 (Yes, No)
12	Major Alarm Threshold (Percent) 2
13	Suppress Major 2 (Yes, No)
14	Minor Alarm Threshold (Percent) 1
15	Suppress Minor 2 (Yes, No)
16	Alarm Name 3 (PsbrActiveBindingsThreshold)
17	Critical Alarm Threshold (Percent) 3
18	Suppress Critical 3 (Yes, No)
19	Major Alarm Threshold (Percent) 3
20	Suppress Major 3 (Yes, No)
21	Minor Alarm Threshold (Percent) 3
22	Suppress Minor 3 (Yes, No)

"Congestion Options elements" in the PCA Help describes the configuration data elements listed in [Table 5-86](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-86 Congestion Options CSV Format**

Column	Data Description
0	Application Type (Pca - Policy and Charging Application)
1	CongOptions (Keyword)
2	Critical Alarm Onset Threshold 1
3	Critical Alarm Abatement Threshold 1
4	Major Alarm Onset Threshold 1
5	Major Alarm Abatement Threshold 1
6	Minor Alarm Onset Threshold 1

**Table 5-86 (Cont.) Congestion Options CSV Format**

Column	Data Description
7	Minor Alarm Abatement Threshold 1
8	Congestion Level 1- Discard Session Creation Requests
9	Congestion Level 1- Discard Session Update Requests
10	Congestion Level 1- Discard Session Terminate Requests
11	Congestion Level 2- Discard Session Creation Requests
12	Congestion Level 2- Discard Session Update Requests
13	Congestion Level 2- Discard Session Terminate Requests
14	Congestion Level 3- Discard Session Creation Requests
15	Congestion Level 3- Discard Session Update Requests
16	Congestion Level 3- Discard Session Terminate Requests

"PCRF Pools elements" in the PCA Help describes the PCRF Pools CSV Record elements listed in [Table 5-87](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-87 PCRF Pools CSV Record Format**

Column	Data Description
0	Application Type (Pca - Policy and Charging Application)
1	PcrfPool (Keyword)
2	PCRF Pool Name (Key)
3	Is Pcrf SubPool
4	Comments

"PCRF Sub-Pool Selection Rules elements" in the PCA Help describes the PCRF Sub-Pool Selection Rules CSV Record elements listed in [Table 5-88](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-88 PCRf Sub-Pool Selection Rules CSV Record Format**

Column	Data Description
0	Application Type (Pca - Policy and Charging Application)
1	SubPoolSelRules (Keyword)
2	Rule Name (Key)
3	Priority
4	PCRf Pool Name
5	Condition Parameter (Origin-Host)
6	Condition Operator (Equals, StartsWith, EndsWith)
7	Condition Value
8	PCRf Sub-Pool Name
9	Last Updated Timestamp (Read Only)

"PCRf Pool To PRT Mapping CSV Record elements" in the PCA Help describes the PCRf Pool To PRT Mapping CSV Record elements listed in [Table 5-89](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-89 PCRf Pool To PRT Mapping CSV Record Format**

Column	Data Description
0	Application Type (Pca - Policy and Charging Application)
1	PcrfPoolToPrt (Keyword)
2	PCRf Pool Name (Key)
3	Peer Route Table Name

"General Options CSV Record elements" in the PCA Help describes the General Options CSV Record elements listed in [Table 5-90](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-90 General Options CSV Record Format**

Column	Data Description
0	Application Type (Pca - Policy and Charging Application)
1	GeneralOptions (Keyword)
2	Policy DRA Enabled
3	Online Charging DRA Enabled

**Table 5-90 (Cont.) General Options CSV Record Format**

Column	Data Description
4	Number of Policy Binding Server Groups
5	Number of Policy and Charging Session Sever Groups
6	Default Stale Session Timeout
7	Maximum Audit Frequency

"Online Charging DRA OCS Session State CSV Record elements" in the PCA Help describes the OCS Session State CSV Record elements listed in [Table 5-91](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-91 Online Charging DRA OCS Session State CSV Record Format**

Column	Data Description
0	Application Type (Pca - Policy and Charging Application)
1	OcsSessionState (Keyword)
2	OCS Realm
3	OCS FQDN
4	OCS Session State Enabled

"Online Charging DRA Realm CSV Record elements" in the PCA Help describes the OC-DRA Realm CSV Record elements listed in [Table 5-92](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-92 Online Charging DRA Realm CSV Record Format**

Column	Data Description
0	Application Type (Pca - Policy and Charging Application)
1	Realm (Keyword)
2	OCS Realm
3	Comment

"Online Charging DRA Network-Wide Options CSV Record elements" in the PCA Help describes the OC-DRA Network-Wide Options CSV Record elements listed in [Table 5-93](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.



**Table 5-93 Online Charging DRA Network-Wide Options CSV Record Format**

Column	Data Description
0	Application Type (Pca - Policy and Charging Application)
1	OcdraNwOptions (Keyword)
2	Session State Scope (None, All Messages, Specific Message)
3	Session State Unavailable Action (Send Answer, Route To Peer)
4	OCS Pool Selection Mode (Single Pool, Multiple Pools)

"PCA Policy Clients Options CSV Record elements" in the PCA Help describes the OC-DRA Network-Wide Options CSV Record elements listed in [Table 5-94](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-94 PDRA Policy Clients CSV Record Format**

Column	Data Description
0	Application Type (Pca - Policy and Charging Application)
1	PolicyClients (Keyword)
2	Policy Client Peer Node Name
3	Topology Hiding Enabled
4	Comments

"Online Charging DRA OCSs CSV Record elements" in the PCA Help describes the OC-DRA OCSs CSV Record elements listed in [Table 5-95](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-95 Online Charging DRA OCSs CSV Record Format**

Column	Data Description
0	Application Type (Pca - Policy and Charging Application)
1	Ocs (Keyword)
2	OCS Peer Node Names
3	Comments

"Online Charging DRA CTFs CSV Record elements" in the PCA Help describes the OC-DRA CTFs CSV Record elements listed in [Table 5-96](#) and configuration

considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-96 Online Charging DRA CTFs CSV Record Format**

Column	Data Description
0	Application Type (Pca - Policy and Charging Application)
1	Ctf (Keyword)
2	CTF Peer Node Names
3	Comments

"Suspect Binding Removal Rules Elements" in the PCA Help describes the Suspect Binding Removal Rules CSV elements listed in [Table 5-97](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-97 Suspect Binding Removal Rules CSV Record Format**

Column	Data Description
0	Application Type (Pca - Policy and Charging Application)
1	SuspectBindingRemovalRules (Keyword)
2	Rule Name (Key)
3	Application Name
4	Command Code
5	Error Scenario Category
6	Result Code
7	Vendor ID
8	Remove Suspect Binding Immediately
9	Comments

### MAP-Diameter Interworking Function CSV File Formats and Contents

The following tables describe the CSV file content and attribute column positions for all configuration data supported by the MDIWF Application Type, for the MD-IWF and DM-IWF applications.

"Diameter Realm elements" in the MAP-Diameter Interworking Help describes the configuration data elements listed in [Table 5-98](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-98 Mapiwf Diameter Realm CSV Format**

Column	Data Description
0	Application Type (Mapiwf - MAP-Diameter Interworking)
1	DiameterRealm (Keyword)
2	Realm
3	Network (ANSI, ITUI, ITUN)
4	MGT Conversion Needed (Yes, No, NA)

"Diameter Identity Global Title Address elements" in the MAP-Diameter Interworking Help describes the configuration data elements listed in [Table 5-99](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-99 Mapiwf DiamIdGta CSV Format**

Column	Data Description
0	Application Type (Mapiwf - MAP-Diameter Interworking)
1	DiamIdGta (Keyword)
2	Host
3	Realm
4	GTA

"Global Title Address Range to Point Code elements" in the MAP-Diameter Interworking Help describes the configuration data elements listed in [Table 5-100](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-100 Mapiwf GtaRangeToPc CSV Format**

Column	Data Description
0	Application Type (Mapiwf - MAP-Diameter Interworking)
1	GtaRangeToPc (Keyword)
2	Default Configuration (Yes, No)
3	GTA Start
4	GTA End
5	Network (ANSI, ITUI, ITUN)
6	Primary Point Code
7	Secondary Point Code

**Table 5-100 (Cont.) Mapiwf GtaRangeToPc CSV Format**

Column	Data Description
8	Load Sharing (Solitary, ActiveActive, ActiveStandby)

"MD-IWF Options elements" in the MAP-Diameter Interworking Help describes the configuration data elements listed in [Table 5-101](#)[Table 5-82](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-101 Mapiwf MD-IWF Option CSV Format**

Column	Data Description
0	Application Type (Mapiwf - MAP-Diameter Interworking)
1	MdiwfOption (Keyword)
2	Diameter Timeout
3	MAP Timeout
4	EIR Host Name
5	EIR Realm
6	IWF HSS Destination Host
7	IWF HSS Destination Realm
8	EIR Destination GTA
9	Shutdown Mode (Forced, Graceful)
10	Shutdown Timer
11	ECR No Destination Host Action (Discard, SendAnswer, TranslateUsingEir)
12	ECR No Destination Host Result Code
13	ECR No Destination Host Vendor ID
14	ECR No Destination Host Error String
15	ECR Destination Host Action (Discard, SendAnswer, TranslateUsingEir)
16	ECR Destination Host Result Code
17	ECR Destination Host Vendor ID
18	ECR Destination Host Error String
19	DSR Node GTA (entityId_1)
20	DSR Node GTA (gta_1)
	-entityId and gta repeated total of 32 times...

**Table 5-101 (Cont.) Mapiwf MD-IWF Option CSV Format**

Column	Data Description
81	DSR Node GTA (entityId_32)
82	DSR Node GTA (gta_32)

"DM-IWF Option elements" in the MAP-Diameter Interworking Help describes the configuration data elements listed in [Table 5-102](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-102 Mapiwf DM-IWF Option CSV Format**

Column	Data Description
0	Application Type (Mapiwf - MAP-Diameter Interworking)
1	DmiwfOption (Keyword)
2	Unavailable Action (ContinueRouting, DefaultRoute, SendAnswer)
3	Route List Name
4	Unavailable Action Result Code
5	Unavailable Action Vendor ID
6	Unavailable Action Error Message
7	AVP Insertion (Yes, No)
8	Shutdown Mode (Forced, Graceful)
9	Shutdown Timer
10	Realm
11	FQDN
12	Application Route Table (ART)
13	Peer Route Table (PRT)

"Diameter Exception elements" in the MAP-Diameter Interworking Help describes the configuration data elements listed in [Table 5-103](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-103 Mapiwf Diameter Exception CSV Format**

Column	Data Description
0	Application Type (Mapiwf - MAP-Diameter Interworking)
1	DiameterException (Keyword)
2	Exception Type (InternalProcessingError, DiamToMapTransTimeout, TranslationError)

**Table 5-103 (Cont.) Mapiwf Diameter Exception CSV Format**

Column	Data Description
3	Exception Name
4	Action (Discard, SendAnswer, ApplyUnavailAction)
5	Result Code
6	Vendor ID
7	Error String

"MAP Exception elements" in the MAP-Diameter Interworking Help describes the configuration data elements listed in [Table 5-104](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-104 Mapiwf MAP Exception CSV Format**

Column	Data Description
0	Application Type (Mapiwf - MAP-Diameter Interworking)
1	MapException (Keyword)
2	Exception Type (InternalProcessingError, MapToDiamTransTimeout, TranslationError)
3	Exception Name
4	Action (Discard, SendAnswer)
5	Abort Reason (UserDefined, ContextNotSupported, DialogRefused)
6	Error Cause (SystemFailure, DataMissing, UnexpectedDataValue, FacilityNotSupported, IncompatibleTerminal, ResourceLimitation)
7	Abort Choice (SpecificReason, ResourceLimitation, ResourceUnavailable)
8	Resource Unavailable Reason (ShortTermLimitation, LongTermLimitation)

"CCNDC Mapping elements" in the MAP-Diameter Interworking Help describes the configuration data elements listed in [Table 5-86](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-105 Mapiwf CCNDC Mapping CSV Format**

Column	Data Description
0	Application Type (Mapiwf - MAP-Diameter Interworking)
1	CcNdcMapping (Keyword)

**Table 5-105 (Cont.) Mapiwf CCNDC Mapping CSV Format**

Column	Data Description
2	Cndc
3	Realm
4	Description

### Gateway Location Application (GLA) CSV File Formats and Contents

"Configure GLA Exceptions elements" in the GLA Help describes the Gateway Location Application (GLA) CSV Record elements listed in [Table 5-106](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-106 GLA Exception CSV Record Format**

Column	Data Description
0	Application Type (GLA)
1	Exception (Keyword)
2	Exception Type(EdlDecodeError, UnknownAppId, UnknownCmdCode, ImsiMsisdnPresent, ImsiMsisdnAbsent, PsbrQueryFailure, PsbrQueryTimeout, ResourceExhausted, UnableToProcess)
3	Exception Name
4	Action ( SendAnswer, SendAnsExp, AbandonRequest )
5	Result Code
6	Vendor ID
7	Error String

"Configure GLA System Options elements" in the GLA Help describes the Gateway Location Application (GLA) CSV Record elements listed in [Table 5-107](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-107 GLA Option CSV Record Format**

Column	Data Description
0	Application Type (GLA)
1	Option (Keyword)
2	Unavailable Action (ContinueRouting, DefaultRoute, SendAnswer, Discard)
3	Unavailable Application Result Code

**Table 5-107 (Cont.) GLA Option CSV Record Format**

Column	Data Description
4	Unavailable Application Vendor ID
5	Unavailable Application Error Message
6	Realm
7	FQDN
8	Unavailable Application Route List

"Configure GLA Alarm Settings elements" in the GLA Help describes the Gateway Location Application (GLA) CSV Record elements listed in [Table 5-108](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-108 GLA Alarm CSV Record Format**

Column	Data Description
0	Application Type (GLA)
1	Alarm (Keyword)
2	Alarm Type (RxGlaMsgRate)
3	Severity(Critical, Major, Minor)
4	Action(Set, Clear)
5	Level

## RADIUS CSV File Formats and Contents

### RADIUS CSV File Formats

The following tables describe the CSV file content and attribute field or column positions for all RADIUS configuration data supported by the RADIUS Application Type.

"RADIUS Message Authentication Cfg Set elements" in the *RADIUS User's Guide* describes the configuration data elements listed in [Table 5-109](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-109 RADIUS Message Authentication Cfg Sets CSV Format**

Column	Data Description
0	Application Type (RADIUS)
1	MsgAuthCfgSet (Keyword)
2	Message Authenticator Set Name (Keyword)
3	Encode Message-Authenticator in egress CoA-Request (YES, NO)



**Table 5-109 (Cont.) RADIUS Message Authentication Cfg Sets CSV Format**

Column	Data Description
4	Encode Message-Authenticator in egress Disconnect-Request (YES, NO)
5	Encode Message-Authenticator in response to Status-Server (YES, NO)
6	Encode Message-Authenticator in egress CoA-NACK (YES, NO)
7	Encode Message-Authenticator in egress CoA-ACK (YES, NO)
8	Encode Message-Authenticator in egress Disconnect-ACK (YES, NO)
9	Encode Message-Authenticator in egress Disconnect NACK (YES, NO)
10	Encode Message-Authenticator in egress Access-Request (YES, NO)
11	Encode Message-Authenticator in egress Access-Accept (YES, NO)
12	Encode Message-Authenticator in egress Access-Reject (YES, NO)
13	Encode Message-Authenticator in egress Access-Challenge (YES, NO)

"RADIUS Shared Secret Cfg Set elements" in the *RADIUS User's Guide* describes the configuration data elements listed in [Table 5-110](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-110 RADIUS Shared Secret Cfg Set CSV Format**

Column	Data Description
0	Application Type (RADIUS)
1	SharedSecretCfgSet (Keyword)
2	Shared Secret Configuration Set Name
3	Shared Secret Configuration Set Key
4	Iv
5	Index

"RADIUS Ingress Status Server Cfg Set elements" in the *RADIUS User's Guide* describes the configuration data elements listed in [Table 5-111](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-111 RADIUS Ingress Status Server Cfg Set CSV Format**

Column	Data Description
0	Application Type (RADIUS)
1	IngressStatusServerCfgSet (Keyword)
2	Ingress Status-Server Set Name
3	Send Response to Status-Server (Yes, No)
4	Status Server Response Message Type (AccountingResponse, AccessAccept)

"RADIUS Message Conversion Cfg Set elements" in the *RADIUS User's Guide* describes the data elements listed in [Table 5-112](#) and considerations for the data elements that must be observed when the elements are edited in the CSV files.

---

**Note:** Import of the Message Conversion Cfg Set is not supported because user configuration of this data is not supported.

---

**Table 5-112 RADIUS Message Conversion Cfg Set CSV Format**

Column	Data Description
0	Application Type (RADIUS)
1	MsgConvCfgSet (Keyword)
2	Message Conversion Set Name
3	Message Conversion Set Rules

"RADIUS NAS Node elements" in the *RADIUS User's Guide* describes the configuration data elements listed in [Table 5-113](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-113 RADIUS NAS Node CSV Format**

Column	Data Description
0	Application Type (RADIUS)
1	NasNode (Keyword)
2	NAS Node Name
3	FQDN
4	Realm
5	NAS Node Identifier
6	NAS IP Addresses [0] (repeated x 4)
9	NAS IP Addresses [3]

"RADIUS Network Options elements" in the *RADIUS User's Guide* describes the configuration data elements listed in [Table 5-114](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-114 RADIUS Network Options CSV Format**

Column	Data Description
0	Application Type (RADIUS)
1	NetworkOptions (Keyword)
2	Name
3	Shared Secret
4	Iv
5	Index

### Subscriber Binding Repository (SBR) CSV File Formats and Contents

The following tables describe the CSV file content and attribute column positions for all configuration data supported by the SBR.

"SBR Database Elements" in the PCA Help describes the SBR Database CSV elements listed in [Table 5-115](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-115 SBR Database CSV Record Format**

Column	Data Description
0	Application Type (SBR)
1	SbrDatabase (Keyword)
2	SBR Database Name (Key)
3	Database Type (Binding or Session)
4	Resource Domain Name
5	Number of Server Groups
6	Place Association Name

"SBR Database Resizing Elements" in the PCA Help describes the SBR Database Resizing CSV elements listed in [Table 5-116](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-116 SBR Database Resizing CSV Record Format**

Column	Data Description
0	Application Type (SBR)
1	SbrDatabaseResizingPlan (Keyword)
2	SBR Database Resizing Plan Name (Key)
3	SBR Database Name
4	Target Resource Domain Name

**Table 5-116 (Cont.) SBR Database Resizing CSV Record Format**

Column	Data Description
5	Target Number of Server Groups

"SBR Data Migration Plan Elements" in the PCA Help describes the SBR Migration Plan CSV elements listed in [Table 5-117](#) and configuration considerations for the data elements that must be observed when the elements are edited in the CSV files.

**Table 5-117 SBR Data Migration Plan CSV Record Format**

Column	Data Description
0	Application Type (SBR)
1	SbrDataMigrationPlan (Keyword)
2	SBR Data Migration Plan Name (Key)
3	Migration Type
4	Initial SBR Database Name
5	Target SBR Database Name