

**Oracle® Communications  
EAGLE LNP Application Processor**

**Install/Upgrade Guide**

Release 11.0

F90379-10

January 2026

**ORACLE®**

Oracle Communications EAGLE LNP Application Processor Install/Upgrade Guide, Release 11.0

Copyright © 2023, 2026 Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notices are applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to thirdparty content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.



**CAUTION: Use only the guide downloaded from the Oracle Technology Network (OTN) (<http://www.oracle.com/technetwork/indexes/documentation/oracle-comms-tekelec-2136003.html>). Before upgrading your system, access the My Oracle Support web portal (<https://support.oracle.com>) and review any Knowledge Alerts that may be related to the System Health Check or the Upgrade.**

Before beginning this procedure, contact My Oracle Support and inform them of your upgrade plans. Refer to Appendix G for instructions on accessing My Oracle Support.



## What's New in this Guide

This section introduces the documentation updates for Release 11.0 in Oracle Communications EAGLE LNP Application Processor Install/Upgrade Guide.

### Release 11.0 - F90379-10, January 2026

- Added a new step (step 9) to [Procedure 5, Backup EUIDB](#) for Active ELAP to verify the MySQL engine before upgrading from ELAP 10.x to 11.x.

### Release 11.0 - F90379-09, January 2026

- Updated references of alter\_Table\_Elap.pl to alter\_Table\_Elap\_11.0.pl in step 9 of [Procedure 5, Backup EUIDB](#).

### Release 11.0 - F90379-08, January 2026

- Updated the Maintenance Window Tasks table under [Section 3.1, Upgrade Timeline for ELAP Procedure Execution Order](#) with the updated procedure numbers.
- Removed step 7 from [Procedure 23, Determine if upgrade or installation is required](#).
- Updated the current step 7 in [Procedure 23, Determine if upgrade or installation is required](#) with details of the latest release.
- Removed details of Euidb\_migration.pl script from [Procedure 16, Restore EUIDB](#).

### Release 11.0 – F90379-07, October 2025

- Made changes to text in the document.

### Release 11.0 – F90379-06, September 2025

- Updated step 10 in [Procedure 5, Backup EUIDB](#).

### Release 11.0 – F90379-05, August 2025

- Added step 10 in [Procedure 5, Backup EUIDB](#) to verify if the mysql engine is changed or not.
- Rearranged step 7 and step 8, and updated steps 2 and 4 in [Procedure 9, Install the ELAP Application](#), and added a note to switch to root user to grep the errors occurred during installation in step 7.
- Updated step 7 and 8 in [Procedure 12, Configure Chrony Servers](#).
- Updated step 10 in [Procedure 16, Restore EUIDB](#).
- Updated step 8 in [Procedure 18, Re-Point LSMS to ELAP VIP](#).
- Updated step 1 in [Procedure 20, Restore SERVEDI backup](#).
- Updated step 4 in [Procedure 22, Accept the Upgrade](#).
- Updated step 3 and step 6 in [Procedure 23, Determine if upgrade or installation is required](#).
- Updated the TPD and ELAP version in the [Install Paths](#) and [Full Upgrade Paths](#) tables.

### Release 11.0 – F90379-04, September 2024

- Added a note about running the “chronyc ntpdata” command in step 8 in [Procedure 11, Configure Chrony Servers](#).
- Added step 11 in [Procedure 12, Initial Network Configuration](#).
- Updated the image of Cisco Switch in step 14 in the [Cisco Switch Configuration](#) procedure.



## TABLE OF CONTENTS

<b>1. INTRODUCTION.....</b>	<b>8</b>
1.1 Purpose and Scope .....	8
1.2 References.....	9
1.3 Acronyms .....	9
1.4 Log Files.....	9
1.5 Definitions .....	9
1.6 Terminology.....	10
1.7 Required Materials .....	10
1.8 E5APPB Server (Rear).....	12
1.9 Telco T5C-24GT Switch (Front).....	13
1.10 Fallback .....	13
<b>2. INSTALL PROCEDURES .....</b>	<b>14</b>
2.1 Required Materials .....	15
2.2 Installation Phases .....	16
<b>3. FULL UPGRADE PROCEDURES .....</b>	<b>17</b>
3.1 Upgrade Timeline for ELAP Procedure Execution Order .....	17
i. Preparation phase.....	17
ii. Maintenance Window Tasks .....	18
3.2 Pre Full Upgrade Steps .....	20
Procedure 1 SETTING UP UPGRADE ENVIRONMENT .....	20
Procedure 2 CAPTURING E5-APP-B CURRENT CONFIGURATIONS .....	21
Procedure 3 PRE-UPGRADE HEALTH CHECK .....	27
3.3 Data Backup before Full upgrade .....	28
Procedure 4 LSMS SERVDI BACKUP .....	28
Procedure 5 BACKUP EUIDB .....	30
Procedure 6 DISCONNECT ELAP FROM LSMS .....	33
3.4 IPM and ELAP 11.0.x Installation .....	36
Procedure 7 IPM MPS SERVER WITH TPD 8.10.X .....	36
Procedure 8 PRE INSTALL CONFIGURATION .....	47
Procedure 9 INSTALL THE ELAP APPLICATION .....	55
Procedure 10 CONFIGURE NETWORK INTERFACE USING PLATCFG UTILITY .....	62
3.5 Initial Configuration on E5APPB .....	67
Procedure 11 Switch Configuration .....	68
Procedure 12 CONFIGURE CHRONY SERVERS .....	72
Procedure 13 INITIAL NETWORK CONFIGURATION .....	75
Procedure 14 VERIFY CONFIGURATIONS .....	80
3.6 Data Migration .....	81
Procedure 15 TRANSFER DATABASES TO MATE .....	81
Procedure 16 RESTORE EUIDB .....	83
Procedure 17 SSH KEY EXCHANGE BETWEEN THE ELAP AND LSMS .....	86
Procedure 18 RE-POINT LSMS TO ELAP VIP .....	91
Procedure 19 TRANSFER SERVDI BACKUP TO ELAP .....	95
Procedure 20 RESTORE SERVDI BACKUP .....	95
Procedure 21 POST FULL UPGRADE SYSCHECK .....	101
Procedure 22 ACCEPT THE UPGRADE.....	102

Procedure 23 DETERMINE IF UPGRADE OR INSTALLATION IS REQUIRED ..... 105  
 Procedure 24 VERIFYING AND CAPTURING REQUIREMENTS ..... 107  
 3.7 SM Migration ..... 107  
 Procedure 25 SM CARDS - CABLE MIGRATION AND DB RELOAD ..... 107

**APPENDIX A. TELCO TO CISCO SWITCH REPLACEMENT ..... 113**  
**APPENDIX B. ISO IMAGE COPY FROM USB MEDIA ..... 130**  
**APPENDIX C. VALIDATE ISO IMAGE ..... 133**  
**APPENDIX D. DISCONNECT NPAC FROM LSMS ..... 135**  
**APPENDIX E. CONNECT NPAC TO LSMS ..... 136**  
**APPENDIX F. REMOVE ACCEPT UPGRADE FAILURE ALARM ..... 138**  
**APPENDIX G. MY ORACLE SUPPORT ..... 139**

**List of Figures**

Figure 1. Example of a step that indicates the server on which it needs to be executed..... 10  
 Figure 2. Example of a step that needs to be executed on both MPS A and MPS B servers..... 10  
 Figure 3. E5-APP-B Server (Rear) ..... 12  
 Figure 4. Telco Switch ..... 13

**List of Tables**

Table 1: Acronyms..... 9  
 Table 2: Definitions ..... 9  
 Table 3: User Password Table ..... 11  
 Table 4 Install paths for E5APPB-02..... 17  
 Table 5: System Configuration Information ..... 14  
 Table 6. User Password Table..... 14  
 Table 7. Installation Phases..... 15  
 Table 8. Full upgrade paths for E5APPB-02 ..... 16  
 Table 9: Timeline table for Full upgrade preparation ..... 16  
 Table 10: Timeline table for Full upgrade of ELAP ..... 17

## 1. INTRODUCTION

### 1.1 Purpose and Scope

This document is designed to detail the steps necessary for full upgrade of the ELAP 10.2.x to ELAP 11.0.x on the E5-APP-B-01/02 cards.

This work is intended to be non-intrusive to the signaling network traffic and is to be performed within the limits of a normally scheduled maintenance window unless otherwise stated.

It will be necessary to halt the provisioning activity during the execution of the procedures outlined herein while a full database backup is being taken. Normal provisioning can resume once the Full upgrade has completed. For any issues incurred in executing any part of this document, follow the contact/escalation list.

The individual executing this procedure must be experienced and well proficient with the following platforms and technologies.

- Unix/Linux Admin
- VI Editor
- IP Networking

If you do not have these skills or if you are not completely comfortable working in a Unix or Linux system environment



**STOP - DO NOT PROCEED**

## 1.2 References

- [1] *Formal Peer Review, PD001866, latest version*
- [2] *Work Instruction Template, TM005023, latest version*
- [3] *TPD Initial Product Manufacture User's Guide, 909-2229-001, Latest revision, Tekelec*
- [4] *ELAP on E5-APP-B Network Interconnect Technical Reference*

## 1.3 Acronyms

Acronym	Description
BIOS	Basic Input Output System
DB	Database
E5-APP-B/E5APPB	Eagle5 Application Card class B cpu/board
IPM	Initial Product Manufacture
MPS	Multi-Purpose Server
OCELAP	Oracle communication EAGLE LNP Application Processor
RIDB	Range Indexed Database
SM	Service Module (i.e. DSM and/or SMXG)
SMXG	Service Module 4 or 8 GB (Eagle card)
TPD	Tekelec Platform Distribution

**Table 1: Acronyms**

## 1.4 Log Files

Upgrade commands executed during an installation are logged in `/var/TKLC/log/upgrade/upgrade.log`. This log file is automatically initiated when upgrade software is invoked. This log file is rolled every time an upgrade is initiated. A total of up to five upgrade log files are stored on the server.

The upgrade wrapper script, `ugwrap`, logs its actions also to `/var/TKLC/log/upgrade/ugwrap.log`. This log file is rolled every time `ugwrap` is initiated. A total of up to five `ugwrap` log files are stored on the server.

The technician running the procedure is responsible for enabling screen logging within the chosen connectivity application.

## 1.5 Definitions

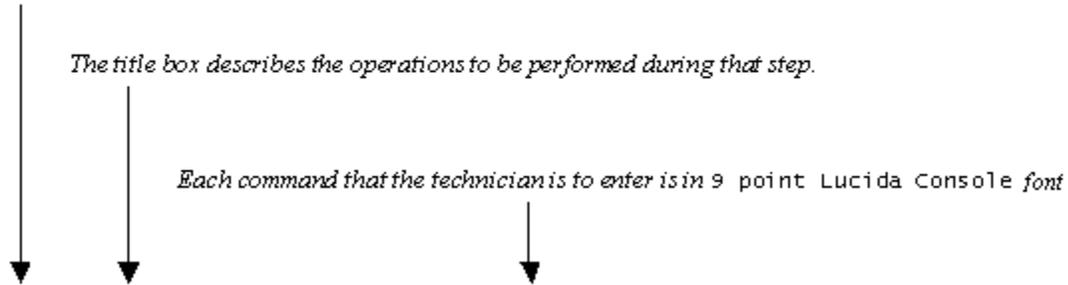
Term	Definition
Active ELAP	The ELAP site that is currently used for provisioning through HSOP.
Standby ELAP	The ELAP site that is NOT currently used for provisioning through HSOP.
System health Check	Procedure used to determine the health and status of the ELAP server, typically performed using the TPD <code>syscheck</code> utility.

**Table 2: Definitions**

## 1.6 Terminology

Multiple servers may be involved with the procedures in this manual. Therefore, most steps in the written procedures begin with the name or type of server to which the step applies. For example:

*Each step has a checkbox for every command within the step that the technician should check to keep track of the progress of the procedure.*



1 <input type="checkbox"/>	MPS A: Verify all materials required are present	Materials are listed in Material List (Section 3.7)
-------------------------------	--	---

Figure 1. Example of a step that indicates the server on which it needs to be executed.

1.	A <input type="checkbox"/>	B <input type="checkbox"/>	MPS X: Insert USB.	Insert media in USB drive.
----	-------------------------------	-------------------------------	--------------------	----------------------------

Figure 2. Example of a step that needs to be executed on both MPS A and MPS B servers.

## 1.7 Required Materials

**Note: Make sure that the LSMS is already migrated to LSMS 14.0 before performing the ELAP migration from ELAP 10.2 to 11.0.x.**

- Two (2) target-release TPD USBs.
- Two (2) target-release ELAP USBs or a target release ELAP ISO file.
- A terminal and null modem cable to establish a serial connection.
- Identify if the ELAP pair is connected to the DSM Cards, or a mixture of DSM and SMXG Cards.

Write down the Eagle Cards type.

Type of Eagle Cards: \_\_\_\_\_

- System configuration information like NTP Server IP, Provisional IPs etc.

Write down the system configuration information.

Provisionable IPs: \_\_\_\_\_

VIP: \_\_\_\_\_

Provisionable Gateway: \_\_\_\_\_

NTP Server IPs: \_\_\_\_\_

Other IPs required: \_\_\_\_\_

- Passwords for users on the local system:

ELAP USERS		
login	MPS A password	MPS B password
elapconfig		
elapdev		
syscheck		
root		
elapall (needed for GUI access)		
mysql(EuiDB) root user		
admusr		

Table 3: User Password Table

1.8 E5APPB Server (Rear)



Figure 3. E5-APP-B Server (Rear)

**Note:** If any additional detail about serial and network connectivity information is required, refer to the Interconnect Diagram [4].

### 1.9 Telco T5C-24GT Switch (Front)

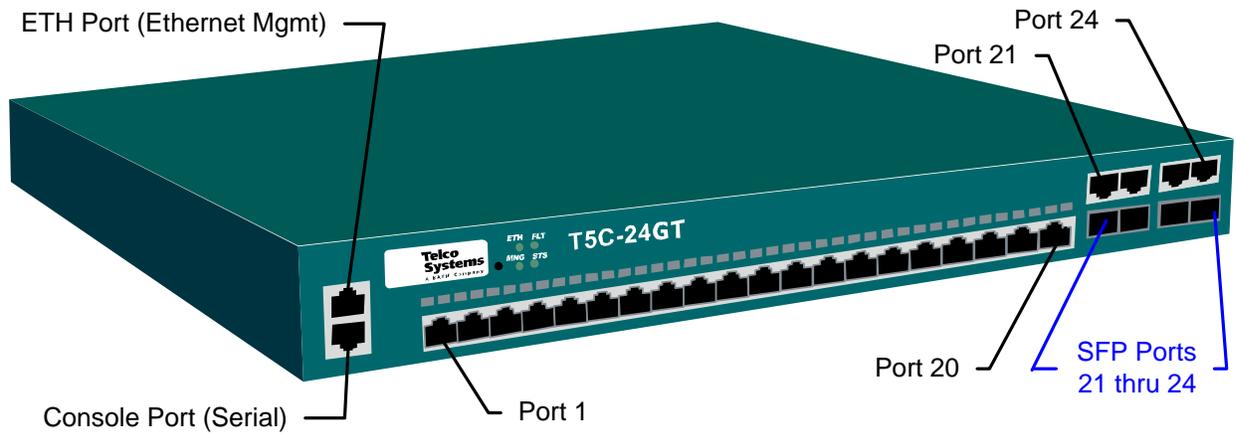


Figure 4. Telco Switch

**Note:** If any additional detail about network connectivity information is required, refer to the Interconnect Diagram [4].

### 1.10 Fallback

If for any reason a fallback to the original configuration is required, the procedure will be to re-IPM the server and install the old ELAP version.

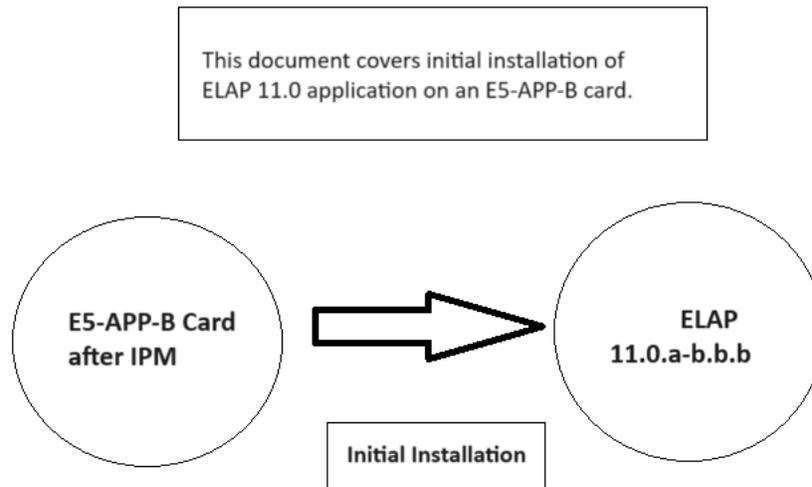
## 2. INSTALL PROCEDURES

This document defines the step-by-step actions performed to execute the initial installation of the ELAP application on the new E5-APP-B card.

The ELAP application can be installed with the TPD release based on the table below.

**Table 4. Install paths:**

TPD Release for IPM	ELAP Initial Installation Release
8.10.1.9.0_150.20.0	11.0.0.4.0



## 2.1 Required Materials

- 1 A target-release TPD ISO (In case IPM is required) and ELAP ISO (for ELAP install/incremental upgrade).
- 2 Optical media – USB flash drive.
- 3 A terminal and null modem cable to establish a serial connection.
- 4 Since **RTDB backups of ELAP 10.2 release are not compatible with ELAP 11.0.X release**, therefore in case of fresh installation, SERVDI backup file from LSMS 14.0 is required to initialize the RTDB. Copy the backup file to some remote machine.
- 5 Eagle STP login IP, user, and password
- 6 Write down the system configuration information.

Description	Information
Provisioning IPs and their netmasks	
VIP	
NTP1 IP	
NTP2 IP	
NTP3 IP	
Provisionable Gateway	
Time Zone	
Other IPs required and their netmasks	

**Table 4: System Configuration Information**

- 7 Passwords for users on the local system:

ELAP USERS		
login	MPS A password	MPS B password
elapconfig		
elapdev		
root		
elapall (needed for GUI access)		
MySQL (EuiDB) root user		
admusr		

**Table 5. User Password Table**

## 2.2 Installation Phases

The general installation strategy is to IPM the E5-APP-B server and then install the application.

The following table illustrates the progression of the installation process by procedure with estimated times. The estimated times and the phases that must be completed may vary due to differences in typing ability and system configuration. The phases outlined in Table 6 are to be executed in the order they are listed.

Phase	Elapsed Time (Minutes)		Activity	Procedure
	This Step	Cum.		
Connectivity setup	15	15	Set up connectivity to the MPS Servers.	<b>Procedure 1</b>
Verify install	5	20	Verify this should be an install.	<b>Procedure 23</b>
Requirements check	15	35	Verify requirements for install are met.	<b>Procedure 24</b>
IPM both servers	90	125	IPM both ELAP servers with TPD 8.10	<b>Procedure 7</b>
Pre-install health check	5	130	Run the syscheck utility to verify that all servers are operationally sound.	<b>Procedure 21</b>
Configure both servers	10	140	Set hostname, designation, function, time zone and time on both servers	<b>Procedure 8</b>
Install Servers	30	170	Install software on sides 1A and 1B	<b>Procedure 9</b>
Configure Switches	30	200	Configure the Switches	<b>Procedure 25</b>
Post-install application processing	30	230	Perform first time configuration.	<b>Procedure 11</b> <b>Procedure 12</b> <b>Procedure 13</b>
Post-incremental upgrade health check	5	235	Run the syscheck utility to verify all servers are operationally sound.	<b>Procedure 21</b>
LSMS SSH Key Exchange	10	245	Perform SSH key exchange with the LSMS.	<b>Procedure 17</b>
Accept the upgrade after successful installation	10	255	Accept the upgrade on both MPS-A and MPS-B	<b>Procedure 22</b>
Post-incremental upgrade health check	10	265	Run the syscheck utility to verify all servers are operationally sound.	<b>Procedure 21</b>

**Table 6. Installation Phases**

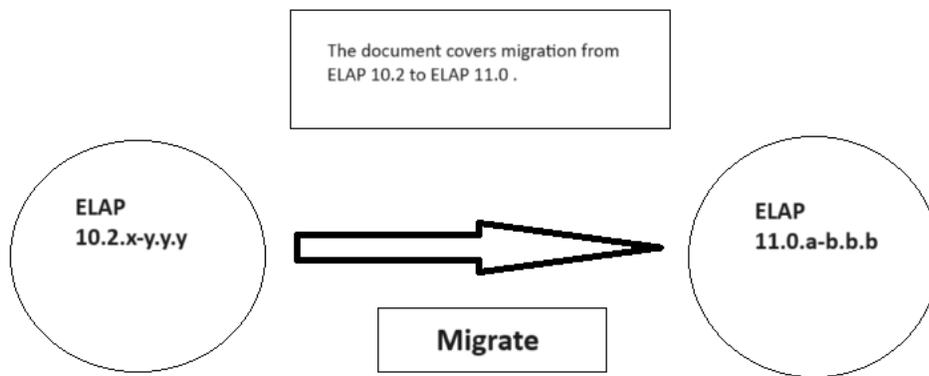
### 3. FULL UPGRADE PROCEDURES

This document defines the step-by-step actions performed to execute a software Full upgrade to ELAP 11.0.x.

The ELAP application can be installed, or full upgraded based on the table below.

**Table 8. Full upgrade paths for E5APPB-02**

<b>TPD Release for IPM</b>	<b>ELAP Initial Installation Release</b>
8.10.1.9.0_150.20.0	11.0.0.4.0
<b>Upgrade Source Release</b>	<b>Upgrade Destination Release</b>
10.2	11.0.x



The following table illustrates the progression of the Full upgrade process by procedure with estimated times. The estimated times and the phases that must be completed may vary due to differences in typing ability and system configuration. The phases outlined in i and ii are to be executed in the order they are listed.

#### 3.1 Upgrade Timeline for ELAP Procedure Execution Order

##### i. Preparation phase

**Table 9: Timeline table for Full upgrade preparation**

ELAP A				ELAP B		
Procedure	Task	A	Task Start time (min)	B	Task	Procedure
	Download the alter table script from OSDC, from					

	where the TPD and ELAP ISO are downloaded.					
	**Before Maintenance Window**					
Procedure 1	Setting Up Upgrade Environment	10	0			
			10	10	Setting Up Upgrade Environment	Procedure 1
Procedure 2	Capture E5APPB Current Configuration	20	20			
Procedure 3	Pre-upgrade health check	10	40			
			50	10	Pre-upgrade health check	Procedure 3

**ii. Maintenance Window Tasks**

**Table 10: Timeline table for Full upgrade of ELAP**

LSMS			
Procedure	Task	Time	Task Start time (min)
3.7Appendix D	Disconnect NPAC fromLSMS	5	0
Procedure 4	*LSMS Servdi Backup	170	175

\*LSMS Servdi backup time will vary according to the data on LSMS. This has to be done simultaneously while IPMing the ELAP servers.

ELAP A				ELAP B		
Procedure	Task	A	Task Start time (min)	B	Task	Procedure
Procedure 5	Backup EuiDB with MyISAM engine and InnoDB engine	15	15			
Procedure 6	Disconnect ELAP from LSMS	5	20			
			25	45	IPM MPS server with TPD 8.10.x	Procedure 7
			70	10	Pre-install configuration	Procedure 8
			80	30	ELAP installation steps	Procedure 9
			110	10	Configure Network for Backup transfer	Procedure 10
Procedure 15	Transfer backup to local B	5	115			
Procedure 7	IPM MPS server with TPD 8..x	45	120			
Procedure 8	Pre-install configuration	10	165			
Procedure 9	ELAP installation steps	30	175			
Procedure 12	*Configure NTP server	5	205			
Procedure 13	Initial Network Configuration	10	210			
Procedure 14	Verify Configurations	5	220			

			225	5	Transfer backup to local A	Procedure 15
Procedure 16	Restore EuiDB	5	230			
Procedure 17	SSH key exchange between ELAP and LSMS	5	235			
Procedure 18	Repoint LSMS to ELAP VIP	15	240			
Procedure 19	Transfer Servdi Image To ELAP	5	255			
Procedure 20	Restore Servdi	15	260			
3.7Appendix E	Connect NPAC to LSMS	5	275			
Procedure 21	Post Upgrade Syscheck	5	280	5	Post Upgrade Syscheck	Procedure 21
Procedure 22	Accept The Upgrade	5	285	5	Accept The Upgrade	Procedure 22

\* After ELAP installation, switch configuration is done before configuring NTP server and initial configuration, it will take an extra 30 minutes to configure the switches. Follow [Procedure 24](#) for switch configuration steps.

**NOTE:** After accepting upgrade on ELAP, the SCCP cards at EAGLE should be initialized to load the ELAP DB.

### 3.2 Pre-Full Upgrade Steps

Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.

Should this procedure fail, Contact My Oracle Support and ask for **FULL UPGRADE ASSISTANCE**.

#### Procedure 1 SETTING UP UPGRADE ENVIRONMENT

S T E P #	A	B	This procedure sets up the Full upgrade environment. Estimated time: 5 minutes	
1.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>E5APPB MPS X:</b> Ensure All the console/PuTTY Sessions are logged in a text file.</p>	<p><b>On all the console/PuTTY sessions, make sure that the logging is enabled and logs are written to a file.</b></p> <p>For example, on a PuTTY session, do the following.</p> <ol style="list-style-type: none"> <li>1. Right click on the top bar in the PuTTY and choose “change setting”.</li> <li>2. Click on “Logging”.</li> <li>3. Select “Printable output”.</li> <li>4. Click on “Browse” and choose where you want the logs to be written so that you can collect those logs later, when needed. Put a name which will serve better on a later date to understand.</li> </ol> <p>For example, name of the log file can be.</p> <p>&lt;Server name&gt;_active_pdba_A_server_puttylog_ddmmyyyy.</p> <ol style="list-style-type: none"> <li>5. Click on “Save”.</li> <li>6. Type a text “Putty Logging starts” in the PuTTY session and check that above text is logged in the PuTTY log file.</li> </ol> <p>Repeat the above six steps on every console/PuTTY session that will be used to enter commands or execute procedure of this document.</p>
2.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>E5APPB MPS X:</b> Login as root to MPS</p>	<p><b>SSH to MPS IP:</b> login: <b>root</b> password: &lt;E5APPB_root_password&gt;</p>
3.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>E5APPB MPS X:</b> Start capture file.</p>	<p>Start a capture file using IsoConsole, or by starting a local screen session and capturing its output.</p>
4.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>E5APPB MPS X:</b> Access mate MPS via serial console</p>	<p><b># minicom mate</b></p>
5.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>E5APPB mate MPS:</b> Login as root.</p>	<p>Console login: <b>root</b> password: &lt;E5APPB_root_password&gt;</p>

**This procedure is complete!**

**Procedure 2 CAPTURING E5-APP-B CURRENT CONFIGURATIONS**

S T E P #	This procedure captures the existing configuration on the server that runs on the source release.  Estimated time: 5 minutes	
1. <input type="checkbox"/>	<b>MPS A:</b> Log in as elapconfig.	<b># su – elapconfig</b>
2. <input type="checkbox"/>	<b>MPS A:</b> A successful configuration file setup results in the display of the ELAP Configuration Menu and its associated header information.  Select option 1 to display the ELAP configuration.	<pre> /-----ELAP Configuration Menu-----\ /-----\    1    Display Configuration                2    Configure Network Interfaces Menu    ---    Set Time Zone                      ---- Exchange Secure Shell Keys          ---- -----nge Password                    ---- -----rm Menu                        ---- ----- NTP Server                    ---- -----r Recovery                     ---- -----\ \-----/  Enter Choice: 1 </pre>
3. <input type="checkbox"/>	<b>MPS A:</b> Configuration information is displayed. Capture and record all information displayed in this output	<pre> ELAP A Provisioning Network IP Address = 10.248.15.17 ELAP B Provisioning Network IP Address = 10.248.15.18 Provisioning Network Netmask          = 255.255.255.0 Provisioning Network Default Router   = 10.248.15.1 Provisioning VIP                       = 10.248.15.19 ELAP A Sync Network Address           = 169.254.1.100 ELAP B Sync Network Address           = 169.254.1.200 ELAP A Main DSM Network Address       = 192.168.120.100 ELAP B Main DSM Network Address       = 192.168.120.200 ELAP A Backup DSM Network Address     = 192.168.121.100 ELAP B Backup DSM Network Address     = 192.168.121.200 ELAP A HTTP Port                      = 80 ELAP B HTTP Port                      = 80 ELAP A HTTP SuExec Port               = 8001 ELAP B HTTP SuExec Port               = 8001 ELAP A Banner Connection Port         = 8473 ELAP B Banner Connection Port         = 8473 ELAP A Static NAT Address              = Not configured </pre>

		<p>ELAP B Static NAT Address = Not configured</p> <p>ELAP A LSMS Connection Port = Not configured</p> <p>ELAP B LSMS Connection Port = Not configured</p> <p>ELAP A EBDA Connection Port = Not configured</p> <p>ELAP B EBDA Connection Port = Not configured</p> <p>Time Zone = America/New_York</p>
4. <input type="checkbox"/>	<p><b>MPS A:</b></p> <p>Record the configuration data.</p>	<p>Record the configuration data paying particular attention to the highlighted items in the sample output above.</p>
5. <input type="checkbox"/>	<p><b>MPS A:</b></p> <p>Press Return to continue.</p>	<p>Press return to continue...&lt;return&gt;</p>
6. <input type="checkbox"/>	<p><b>MPS A:</b></p> <p>The ELAP Configuration Menu is displayed.</p> <p>Select option 7 to configure the NTP Server.</p>	<pre> /-----ELAP Configuration Menu-----\ /-----\   1   Display Configuration    -----    2   Configure Network Interfaces Menu    -----    3   Set Time Zone    -----    4   Exchange Secure Shell Keys    -----    5   Change Password    -----    6   Platform Menu    -----    7   Configure NTP Server    -----    8   Mate Disaster Recovery    -----    e   Exit   \-----/ Enter Choice: 7                     </pre>
7. <input type="checkbox"/>	<p><b>MPS A:</b></p> <p>The ELAP NTP Server Menu is displayed.</p> <p>Select option 1 to display the External NTP Server (if configured).</p>	<pre> /-----ELAP Configure NTP Server Menu-\ /-----\   1   Display External NTP Server    -----    2   Add External NTP Server    -----    3   Remove External NTP Server    -----    e   Exit   \-----/ Enter Choice: 1                     </pre>
8. <input type="checkbox"/>	<p><b>MPS A:</b></p> <p>Record the NTP server information (if configured).</p>	<p>chronyserver1 &lt;Ipaddress 1&gt;</p> <p>chronyserver2 &lt;Ipaddress 2&gt;</p>

		<p>Press return to continue...&lt;return&gt;</p> <p>If no NTP server is configured, the output will be as below:</p> <p>There are no External NTP Servers.</p> <p>Press return to continue...&lt;return&gt;</p> <p>Note: NTP is mandatory for ELAP 10.1 and higher releases so if no NTP is configured; it is required to get an NTP server IP ready before proceeding for full upgrade.</p>
<p>9.</p> <p><input type="checkbox"/></p>	<p><b>MPS A:</b></p> <p>Select e to exit</p>	<pre> /-----ELAP Configure NTP Server Menu-\  /-----\    1   Display External NTP Server     -----     2   Add External NTP Server     -----     3   Remove External NTP Server     -----     e   Exit    \-----\  Enter Choice: e </pre>
<p>10.</p> <p><input type="checkbox"/></p>	<p><b>MPS A:</b></p> <p>Select e to exit</p>	<pre> /-----ELAP Configuration Menu-----\  /-----\    1   Display Configuration     -----     2   Configure Network Interfaces Menu     -----     3   Set Time Zone     -----     4   Exchange Secure Shell Keys     -----     5   Change Password     -----     6   Platform Menu     -----     7   Configure NTP Server     -----     8   Mate Disaster Recovery     -----     e   Exit    \-----\  Enter Choice: e </pre>
<p>11.</p> <p><input type="checkbox"/></p>	<p><b>MPS A:</b></p> <p>Write down the current ELAP release</p>	<pre> # rpm -qi TKLCelap Release      : 10.1.5.0.0_101.20.0  # uiEdit   grep ELAP_RELEASE "ELAP_RELEASE" is set to "10.1.5" </pre>

12. <input type="checkbox"/>	<b>MPS A:</b> Capture the ELAP_PRETTY_ N“ME on ELAP 1”.1 if configured.	” uiEdit   grep PRETTY_NAME "ELAP_A_PRETTY_NAME" is set to "ELAP_A_NAME" "ELAP_B_PRETTY_NAME" is set to "ELAP_B_NAME"
---------------------------------	---	---

13.

 MPS A:

Capture the entire uiEdit output for reference if required later.

The example output to the right has been truncated to fit this page.

```
[elapdev@Andros-A ~]$ uiEdit
"LNP_ENABLED" is set to "TRUE"
"Alarms_Purged_Nb_Days" is set to "30"
"new_user_default_group" is set to "readonly"
"max_concurrent_users" is set to "180"
"EBDAD_LS_PORTS" is set to "1030"
"max_concurrent_logins" is set to "1"
"ELAP_A_DSM_LAN_NETWORK_ADDR" is set to "192.168.123.100"
"max_concurrent_logins" is set to "20"
"ELAP_A_NAME" is set to "Andros-A"
"ELAP_RELEASE" is set to "10.1.5"
"ELAP_LOGGING_REMOTE_USERNAME" is set to ""
"ELAP_A_SYNCHRONOUS_NETWORK_ADDR" is set to "169.254.1.100"
"AUTO_RTDB_BACKUP_FILE_PATH" is set to "/var/TKLC/elap/free/backup"
"HTTP_ENABLED" is set to "No"
"ELAP_A_PRETTY_NAME" is set to "ELAP_A_NAME"
"AUTO_RTDB_BACKUP_INTERVAL_MIN" is set to "5"
"session_idle_timeout" is set to "10"
"ELAP_A_BACKUP_NETWORK_IP_ADDRESS" is set to "10.75.1.24"
"EXINIT_DEBUG_LEVEL" is set to "OFF"
"SNAPPER_ROLLBACK_INTERVAL" is set to "00"
"EBDAD_DEBUG_LEVEL" is set to "OFF"
"MAIN_DEBUG_NUM_LOGS" is set to "5"
"RTDB_LOAD_PATH" is set to "/dev/vgdrb0"
"PROV_DEBUG_NUM_LOGS" is set to "5"
"LNPTRANS_LOAD_DEBUG" is set to "7"
"EXINIT_DEBUG_NUM_LOAD" is set to "5"
"ELAP_A_HTTP_PORT" is set to "80"
"EXINIT_ERROR_NUM_LOAD" is set to "5"
"load_message" is set to "NOTICE: This is a private computer system. Unauthorized access may lead to prosecution."
"ELAP_B_HTTPS_PORT" is set to "443"
"ELAP_B_NAME" is set to "Andros-B"
"AUTO_RTDB_BACKUP_TIME" is set to "6:00"
"EBDAD_GS_PORT" is set to "962"
"LNP_LOAD_QTY" is set to "200000"
"BACKUP_FILE_DIR" is set to "/var/TKLC/elap/free/backup"
"LAP_LOGGING_EXPORT" is set to "DISABLED"
"AUTO_RTDB_BACKUP_FREQUENCY" is set to "1"
"PROVISIONING_NETWORK_NETWORK" is set to "255.255.55.0"
"ELAP_LOGGING_REMOTE_SFTP_PATH" is set to ""
"ELAP_B_SYNCHRONOUS_NETWORK_ADDRESS" is set to "169.254.1.200"
"ELAP_A_HTTPS_PORT" is set to "443"
"ELAP_A_DSM_MAIN_NETWORK_ADDRESS" is set to "192.168.123.100"
"ELAP_A_SECURE_HTTPS_PORT" is set to "8002"
"ELAP_A_GS_BANNER_PORT" is set to "8473"
"ELAP_A_DSM_BACKUP_NETWORK_ADDR" is set to "192.168.121.200"
"MAINT_DEBUG_LEVEL" is set to "OFF"
"DOWNLOAD_FILE_DIR" is set to "/var/TKLC/elap/free/backup"
"eidb_version" is set to "3"
"LOAD_NPANXX_QTY" is set to "35000"
"LSMS_PROVISIONING" is set to "OFF"
"ELAP_LOGGING_TIME_FORMAT" is set to "UTC"
"MAINT_ERROR_NUM_LOGS" is set to "5"
"UI_INITIALIZATION_ENABLED" is set to "FALSE"
"ELAP_LOGGING_REMOTE_IP_ADDRESS" is set to ""
"AUTO_RTDB_BACKUP_DELETE_OPERATION" is set to "y"
"HSOPD_ERROR_NUM_LOGS" is set to "5"
"TRPD_ERROR_NUM_LOGS" is set to "5"
"cache_403_error_message" is set to "NOTICE: This operation is not authorized to access the GUI."
"EBDAD_ERROR_NUM_LOGS" is set to "5"
```

	<pre> "max_account_inactivity" is set to "0" "HSOPD_DEBUG_E" "EL" is set to "OFF" "TRPD_DEBUG_U" "OGS" is set to "5" "EL" "P_LOGGING_R" "M" "T_PASSWORD" is set to "" "ELAP_B_H" "T" "PORT" is set to "8" "MATE_MPS_H" "T" "S_PORT" is set to "443" "EBD" "D_DEBUG_NUM" "O" "S" is set to "5" "ELAP_B_PRE" "TY" "N" "ME" is set to "ELAP_B_NAME" "HS" "PD" "S" "S_PROVISIONING_PORT" is set to "4" "3" "ELAP_RIDB_RELEASES" is set to "10.0.0" "S" "A" "PER_LOG_LEVEL" is set to "0" "AUTO_RTDB_KUP_Y" "E" is set to "loc" "l_mate" "PR" "V_ERROR" "UM_LOGS" is set to "5" "ELAP" "R" "V_NETWORK_IP_ADDRESS" is set to "10.75.141" "2" "CNF_QTY_THRESHOLD_PERC" is set to "90" "MATE_MPS_HTTP_PORT" is set to "80" "passwd_reuse" "limit" is set to "12" "apache_403_error_message_default" is set to "NOTICE: This workstation is not authorized to access the GUI." "HTTPS_ENABLED" is set to "es" "HSOPD_DEBUG_NUM_LOGS" is set to "5" "ELAP_B_DSM_MAIN_NETWORK_ADDRESS" is set to "192.168.1" "0.200" "LOCAL_PROVISIONING_VIP" is set to "10.75.141.25" "TRPD_DEBUG_LEVEL" is set to "OFF" "RTD" "UDIT" is set to "ON" "NP_TN_QTY" is set to "50" "0000" "ELAP_B_GS_BANNER_PORT" is set to "8473" "PROV_DEBUG_LVL" is set to "OFF" "RE" "OAD_FLOW" "OTROL_TIME" is set to "200" "passwd_compatibility_checking" is set to "on" "LRNMR_QTY" is set to "20000" "0" "RTDBA_NMLG" is set to "5" "PROVISIONING_NETWORK_EFFECT_ROUTER" is set to "1" "75.141" "1" "RIDB_LV_NAME" is set to "lpb" "ELAP_A_SUEXEC_HTTP_PORT" is set to "8001" "ELAP_B_SUEXEC_HTTP_PORT" is set to "80" "2" "LRNMR_QTY" is set to "2" "0000" "ELAP_LOG_IMAGES_ENHANCEMENTS_FEATURE" is set to "OFF" "ELAP_A_DSM_BACKUP_NETWORK_ADDRESS" is set to "192.168.121.100" "HSOPD_GS_PORT" is set to "691" "ELAP_B_SUEXEC_HTTP_PORT" is set to "800" "ELAP_B_DSM_LB_NETWORK_ADDRESS" is set to "1" "2" "168.123.200" "max_failed_logins" is set to "3" "BULK_DOWNLOAD" is set to "N" </pre>
<p>13. <b>Error define</b></p>	<p><b>MPSA</b> Note down the timestamp in output.</p> <p>Run the following command: # date</p>

14.	<input type="checkbox"/> <b>MPS A:</b> Login to ELAP GUI via uiadmin user MPS 1A: Navigate to the main Maintenance menu selection and select “Automatic RTDB Backup” and note down the configuration details	<div style="text-align: right;"> <b>ELAP_A_NAME</b> <span style="float: right;">Automatic RTDE</span> </div> <hr/> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 60%;">Backup Type (Select None to Cancel Backups)</td> <td>Local and Mate ▾</td> </tr> <tr> <td>Time of the day to start the Backup</td> <td>6:00</td> </tr> <tr> <td>Frequency</td> <td>1 Day ▾</td> </tr> <tr> <td>File Path (Directory only)</td> <td><input type="text"/></td> </tr> <tr> <td>Remote Machine IP Address (xxx.yyy.zzz.yyy)</td> <td><input type="text"/></td> </tr> <tr> <td>Login Name</td> <td><input type="text"/></td> </tr> <tr> <td>Password</td> <td><input type="password"/></td> </tr> <tr> <td>Save the local copies in the default path</td> <td><input type="radio"/> Yes <input type="radio"/> No</td> </tr> <tr> <td>Option to delete old backups Note:If you select Yes, by default 5 backup files will be maintained</td> <td><input checked="" type="radio"/> Yes <input type="radio"/> No</td> </tr> <tr> <td>Specify the number of files to maintain</td> <td>5</td> </tr> </table>	Backup Type (Select None to Cancel Backups)	Local and Mate ▾	Time of the day to start the Backup	6:00	Frequency	1 Day ▾	File Path (Directory only)	<input type="text"/>	Remote Machine IP Address (xxx.yyy.zzz.yyy)	<input type="text"/>	Login Name	<input type="text"/>	Password	<input type="password"/>	Save the local copies in the default path	<input type="radio"/> Yes <input type="radio"/> No	Option to delete old backups Note:If you select Yes, by default 5 backup files will be maintained	<input checked="" type="radio"/> Yes <input type="radio"/> No	Specify the number of files to maintain	5
Backup Type (Select None to Cancel Backups)	Local and Mate ▾																					
Time of the day to start the Backup	6:00																					
Frequency	1 Day ▾																					
File Path (Directory only)	<input type="text"/>																					
Remote Machine IP Address (xxx.yyy.zzz.yyy)	<input type="text"/>																					
Login Name	<input type="text"/>																					
Password	<input type="password"/>																					
Save the local copies in the default path	<input type="radio"/> Yes <input type="radio"/> No																					
Option to delete old backups Note:If you select Yes, by default 5 backup files will be maintained	<input checked="" type="radio"/> Yes <input type="radio"/> No																					
Specify the number of files to maintain	5																					

**This procedure is complete!**

**Procedure 3 PRE-UPGRADE HEALTH CHECK**

S T E P #	A	B	This procedure determines the health of the MPS before beginning the Full upgrade. This procedure should be done 1 week before scheduled Full upgrade and repeated the day of the Full upgrade.  Estimated time: 5 minutes	
1.	<input type="checkbox"/>	<input type="checkbox"/>	<b>MPS X:</b> Validate date, time and time zone to ensure accuracy.	<b># date</b> Fri May 20 07:05:41 EDT 2016
2.	<input type="checkbox"/>	<input type="checkbox"/>	<b>MPS X:</b> Execute syscheck.	<b># syscheck</b> <pre> Running modules in class disk...      OK Running modules in class net...       OK Running modules in class proc...      OK Running modules in class system...    OK Running modules in class hardware...  OK The log is available at: --&gt;/opt/TKLCplat/log/syscheck/fail_log                     </pre>
3.	<input type="checkbox"/>	<input type="checkbox"/>	<b>MPS X:</b> Check for any alarms on the server.	<pre>[elapdev@ E5APP-B-a ~]\$ manageBannerInfo -l</pre> <p><b>There are currently no BannerInfo messages for this side in the database.</b></p>
4.	<input type="checkbox"/>	<input type="checkbox"/>	<b>MPS X:</b> Obtain the host id for logging purposes.	<pre>[elapdev@ E5APP-B-a ~]\$ hostid</pre> <p>a8c0b23d</p>
5.	<input type="checkbox"/>	<input type="checkbox"/>	<b>MPS X:</b> Obtain the uptime of the system for logging purposes.	<pre>[elapdev@ E5APP-B-a ~]\$ uptime</pre> <p>03:29:12 up 46 days, 20:00, 5 users, load average: 0.16, 0.24, 0.27</p>

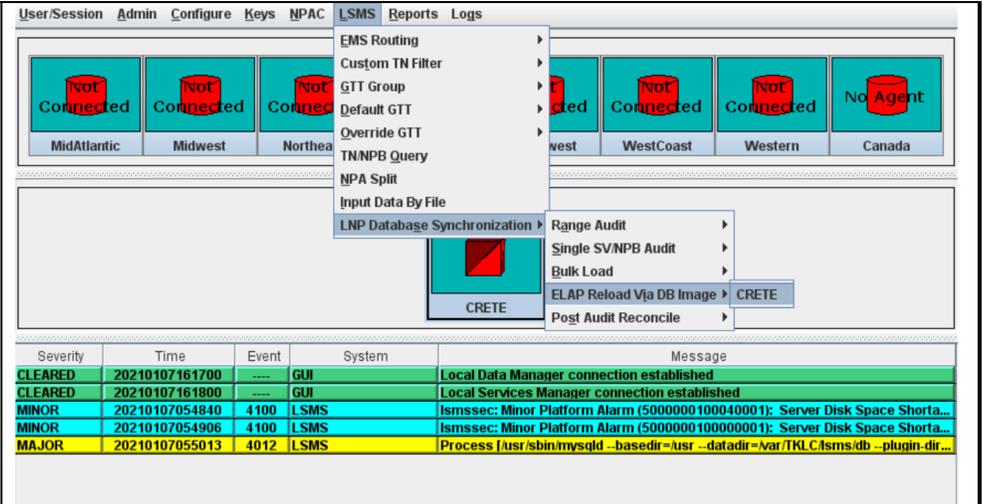
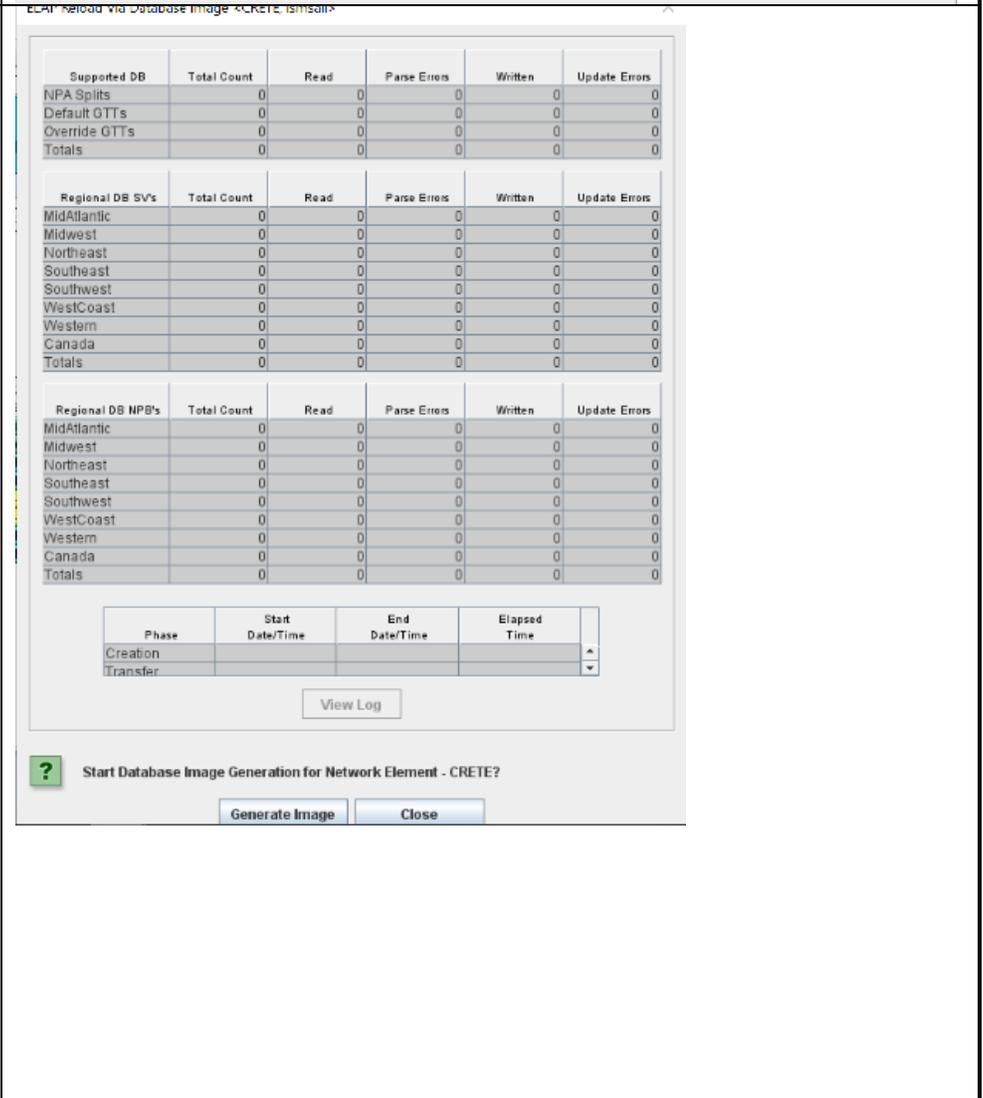
6.	<input type="checkbox"/>	<input type="checkbox"/>	Repeat on the day of the scheduled Full upgrade	All Health Checks should be repeated the day of the Full upgrade. If any problems are encountered, resolve before proceeding further.
7.	<input type="checkbox"/>	<input type="checkbox"/>	<b>MPS X:</b> Note down the timestamp in log.	Run the following command. \$ date

**This procedure is complete!**

### 3.3 Data Backup before Full upgrade

#### Procedure 4 LSMS SERVDI BACKUP

1.	<b>LSMS:</b> Login to Active LSMS server as root user.	login: root Password: <root_password>
2.	Change the user to lsmsadm.	# su -lsmsadm
3.	Enable the servdi feature	lsmsadm@lsmspri ~]\$ dbcfginternal SERVDI_ENABLED Y  Note: The SERVDI feature will not be available within a GUI instance until the GUI is restarted.  Update complete
4.	Verify that servdi feature has been enabled.	lsmsadm@lsmspri ~]# lsmsdb -c features   grep "SERVDI_ENABLED" Y SERVDI_ENABLED
5.	<b>LSMS:</b> Log in to the LSMS GUI as a member of the permission group that is authorized to perform this operation.	

<p>6.</p>	<p>Select the LSMS icon.                  Right click on LSMS icon                  LSMS-&gt; LNP Database Synchronization -&gt; ELAP Reload via DB image</p>	 <p>The screenshot shows the LSMS interface with a menu open. The menu path is: LSMS -&gt; LNP Database Synchronization -&gt; ELAP Reload Via DB Image. A 'CREATE' button is visible next to this option. Below the menu, a log table displays the following data:</p> <table border="1"> <thead> <tr> <th>Severity</th> <th>Time</th> <th>Event</th> <th>System</th> <th>Message</th> </tr> </thead> <tbody> <tr> <td>CLEARED</td> <td>20210107161700</td> <td>----</td> <td>GUI</td> <td>Local Data Manager connection established</td> </tr> <tr> <td>CLEARED</td> <td>20210107161800</td> <td>----</td> <td>GUI</td> <td>Local Services Manager connection established</td> </tr> <tr> <td>MINOR</td> <td>20210107054840</td> <td>4100</td> <td>LSMS</td> <td>Ismssec: Minor Platform Alarm (5000000100040001): Server Disk Space Shorta...</td> </tr> <tr> <td>MINOR</td> <td>20210107054906</td> <td>4100</td> <td>LSMS</td> <td>Ismssec: Minor Platform Alarm (5000000100000001): Server Disk Space Shorta...</td> </tr> <tr> <td>MAJOR</td> <td>20210107055013</td> <td>4012</td> <td>LSMS</td> <td>Process /usr/sbin/mysqld --basedir=/usr --datadir=/var/lib/mysql --plugin-dir...</td> </tr> </tbody> </table>	Severity	Time	Event	System	Message	CLEARED	20210107161700	----	GUI	Local Data Manager connection established	CLEARED	20210107161800	----	GUI	Local Services Manager connection established	MINOR	20210107054840	4100	LSMS	Ismssec: Minor Platform Alarm (5000000100040001): Server Disk Space Shorta...	MINOR	20210107054906	4100	LSMS	Ismssec: Minor Platform Alarm (5000000100000001): Server Disk Space Shorta...	MAJOR	20210107055013	4012	LSMS	Process /usr/sbin/mysqld --basedir=/usr --datadir=/var/lib/mysql --plugin-dir...																																																																																																																								
Severity	Time	Event	System	Message																																																																																																																																																				
CLEARED	20210107161700	----	GUI	Local Data Manager connection established																																																																																																																																																				
CLEARED	20210107161800	----	GUI	Local Services Manager connection established																																																																																																																																																				
MINOR	20210107054840	4100	LSMS	Ismssec: Minor Platform Alarm (5000000100040001): Server Disk Space Shorta...																																																																																																																																																				
MINOR	20210107054906	4100	LSMS	Ismssec: Minor Platform Alarm (5000000100000001): Server Disk Space Shorta...																																																																																																																																																				
MAJOR	20210107055013	4012	LSMS	Process /usr/sbin/mysqld --basedir=/usr --datadir=/var/lib/mysql --plugin-dir...																																																																																																																																																				
<p>7.</p>	<p>Click on generate image</p>	 <p>The screenshot shows the 'ELAP Reload via Database Image - CREATE, Ismssec' dialog box. It contains three summary tables:</p> <table border="1"> <thead> <tr> <th>Supported DB</th> <th>Total Count</th> <th>Read</th> <th>Parse Errors</th> <th>Written</th> <th>Update Errors</th> </tr> </thead> <tbody> <tr> <td>NPA Splits</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>Default GTTs</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>Override GTTs</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>Totals</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Regional DB SV's</th> <th>Total Count</th> <th>Read</th> <th>Parse Errors</th> <th>Written</th> <th>Update Errors</th> </tr> </thead> <tbody> <tr><td>MidAtlantic</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>Midwest</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>Northeast</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>Southeast</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>Southwest</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>WestCoast</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>Western</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>Canada</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>Totals</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Regional DB NPB's</th> <th>Total Count</th> <th>Read</th> <th>Parse Errors</th> <th>Written</th> <th>Update Errors</th> </tr> </thead> <tbody> <tr><td>MidAtlantic</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>Midwest</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>Northeast</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>Southeast</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>Southwest</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>WestCoast</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>Western</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>Canada</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>Totals</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> </tbody> </table> <p>Below the tables is a 'View Log' button and a phase selection dropdown menu with 'Creation' and 'Transfer' options. At the bottom, there is a question mark icon and the text 'Start Database Image Generation for Network Element - CREATE?'. Two buttons, 'Generate Image' and 'Close', are at the very bottom.</p>	Supported DB	Total Count	Read	Parse Errors	Written	Update Errors	NPA Splits	0	0	0	0	0	Default GTTs	0	0	0	0	0	Override GTTs	0	0	0	0	0	Totals	0	0	0	0	0	Regional DB SV's	Total Count	Read	Parse Errors	Written	Update Errors	MidAtlantic	0	0	0	0	0	Midwest	0	0	0	0	0	Northeast	0	0	0	0	0	Southeast	0	0	0	0	0	Southwest	0	0	0	0	0	WestCoast	0	0	0	0	0	Western	0	0	0	0	0	Canada	0	0	0	0	0	Totals	0	0	0	0	0	Regional DB NPB's	Total Count	Read	Parse Errors	Written	Update Errors	MidAtlantic	0	0	0	0	0	Midwest	0	0	0	0	0	Northeast	0	0	0	0	0	Southeast	0	0	0	0	0	Southwest	0	0	0	0	0	WestCoast	0	0	0	0	0	Western	0	0	0	0	0	Canada	0	0	0	0	0	Totals	0	0	0	0	0
Supported DB	Total Count	Read	Parse Errors	Written	Update Errors																																																																																																																																																			
NPA Splits	0	0	0	0	0																																																																																																																																																			
Default GTTs	0	0	0	0	0																																																																																																																																																			
Override GTTs	0	0	0	0	0																																																																																																																																																			
Totals	0	0	0	0	0																																																																																																																																																			
Regional DB SV's	Total Count	Read	Parse Errors	Written	Update Errors																																																																																																																																																			
MidAtlantic	0	0	0	0	0																																																																																																																																																			
Midwest	0	0	0	0	0																																																																																																																																																			
Northeast	0	0	0	0	0																																																																																																																																																			
Southeast	0	0	0	0	0																																																																																																																																																			
Southwest	0	0	0	0	0																																																																																																																																																			
WestCoast	0	0	0	0	0																																																																																																																																																			
Western	0	0	0	0	0																																																																																																																																																			
Canada	0	0	0	0	0																																																																																																																																																			
Totals	0	0	0	0	0																																																																																																																																																			
Regional DB NPB's	Total Count	Read	Parse Errors	Written	Update Errors																																																																																																																																																			
MidAtlantic	0	0	0	0	0																																																																																																																																																			
Midwest	0	0	0	0	0																																																																																																																																																			
Northeast	0	0	0	0	0																																																																																																																																																			
Southeast	0	0	0	0	0																																																																																																																																																			
Southwest	0	0	0	0	0																																																																																																																																																			
WestCoast	0	0	0	0	0																																																																																																																																																			
Western	0	0	0	0	0																																																																																																																																																			
Canada	0	0	0	0	0																																																																																																																																																			
Totals	0	0	0	0	0																																																																																																																																																			

This procedure is complete!

**Procedure 5 BACKUP EUIDB**

This section lists the procedures, in order, that must be performed to backup the system prior to Full upgrade. Save the backup to third-party server instead of ELAP-A/B which are to be upgraded.

<b>S T E P #</b>	<p>This procedure backs up the EuiDB.</p> <p><b>Note: Estimated time of completion is 5 minutes.</b></p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>Should this procedure fail, Contact Oracle technical services and ask for <b>FULL UPGRADE ASSISTANCE</b>.</p>	
1. <input type="checkbox"/>	<p><b>Active ELAP:</b></p> <p>Login to the Active ELAP server as user “elapdev”.</p>	<p>E5APP-B-b login: <b>elapdev</b> Password: <b>*****</b></p> <p><b>[elapdev@E5APP-B-b elapdev]#</b></p>
2. <input type="checkbox"/>	<p><b>Active ELAP:</b></p> <p>Stop the ELAP Application</p>	<pre>[elapdev@E5APP-B-b ~]\$ service Elap stop [elapdev@E5APP-B-b ~]\$</pre>
3. <input type="checkbox"/>	<p><b>Active ELAP:</b></p> <p>Switch user to root.</p>	<p><b>\$su -</b> Password: <b>&lt;root_password&gt;</b></p>
4. <input type="checkbox"/>	<p><b>Active ELAP:</b></p> <p>Switch user to elapconfig.</p>	<p><b>\$su - elapconfig</b></p>
5. <input type="checkbox"/>	<p><b>Active ELAP:</b></p> <p>Login as “<b>elapconfig</b>” to start the ELAP Configuration utility.</p> <p>Select option “6” and press enter.</p>	<pre>/-----ELAP Configuration Menu-----\ /-----\   1   Display Configuration    -----    2   Configure Network Interfaces Menu    -----    3   Set Time Zone    -----    4   Exchange Secure Shell Keys    -----    5   Change Password    -----    6   Platform Menu    -----    7   Configure NTP Server    -----    8   Mate Disaster Recovery    -----    e   Exit   \-----/  Enter Choice: 6</pre>
6. <input type="checkbox"/>	<p><b>Active ELAP:</b></p> <p>1) Select “3” and press return to start the MySQL Backup.</p>	<pre>/-----ELAP Platform Menu-\ /-----\   1   Initiate Upgrade    -----    2   Reboot MPS  </pre>

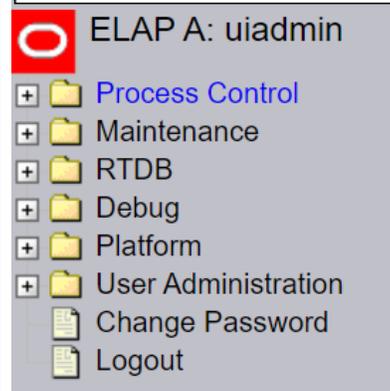
	<p>2) Select “Y” when prompted and press return.</p> <p><b>NOTE: Th MyISAM backup taken in this step, will be used, if in any case the full upgrade from ELAP 10.2 to ELAP 11.0 fails. For ELAP 11.0 we will use the InnoDB mysql backup for EuiDB taken at step 10 after changing the mysql engine.</b></p>	<pre>  ----- -----    3   MySQL Backup    ----- -----    4   RTDB Backup      ----- -----    e   Exit             \-----/  Enter Choice:3  Are you sure you want to back up the MySQL database on MPS A? [N]: Y Backing up the NPDB... NPDB Backed up Successfully to /var/TKLC/appl/free/npdbBackup_Floater04_20231116041558.sql. gz         </pre>
<p>7. <input type="checkbox"/></p>	<p><b>Active ELAP:</b> Select “e” and press Enter to exit the Platform Menu.</p>	<pre> /-----ELAP Platform Menu-\ /-----\   1   Initiate Upgrade    ----- -----    2   Reboot MPS          ----- -----    3   MySQL Backup        ----- -----    4   RTDB Backup        ----- -----    e   Exit               \-----/  Enter Choice:e         </pre>
<p>8. <input type="checkbox"/></p>	<p><b>Active ELAP:</b> Enter e to exit the ELAP Configuration Menu.</p>	<pre> /-----ELAP Configuration Menu-----\ /-----\   1   Display Configuration    ----- -----    2   Configure Network Interfaces Menu    ----- -----    3   Set Time Zone            ----- -----    4   Exchange Secure Shell Keys    ----- -----    5   Change Password          ----- -----    6   Platform Menu            ----- -----    7   Configure NTP Server      ----- -----    8   Mate Disaster Recovery    ----- -----    e   Exit                     \-----/  Enter Choice:e         </pre>
<p>9.</p>	<p><b>ACTIVE ELAP</b></p>	<p>Please note that the alter mysql engine step needs to be executed when upgrading from ELAP 10.x to 11.x. If upgrading from 11.x to 11.y, the engine will already be updated to InnoDB.</p>

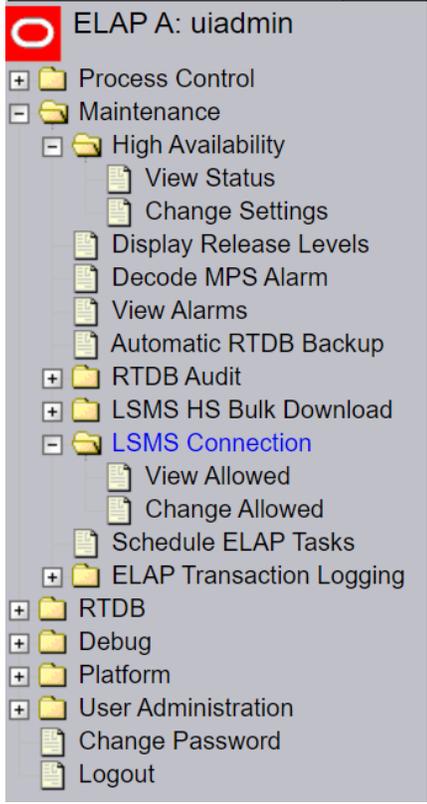
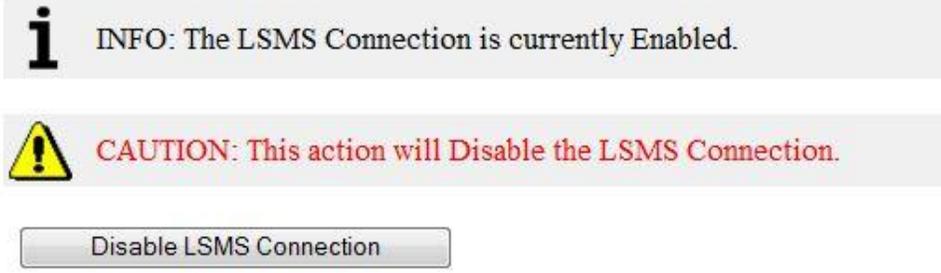

		<p>Hence, we would verify the mysql engine using the below command before running the alter_Table_Elap_11.0.pl</p> <pre>mysql -uroot -p EuiDB -e "show table status\G;"</pre> <p><b>Example:</b> The example below contains a snapshot of only one table in EuiDB. The actual output will show all the tables present in EuiDB.</p> <pre>[elapdev@Arica-a ~]\$ mysql -uroot -p EuiDB -e "show table status\G;" Enter password: ***** 1. row *****       Name: econfig       Engine: InnoDB       Version: 10       Row_format: Dynamic       Rows: 103       Avg_row_length: 636       Data_length: 65536       Max_data_length: 0       Index_length: 0       Data_free: 0       Auto_increment: NULL       Create_time: 2026-01-22 02:08:13       Update_time: 2026-01-22 02:46:48       Check_time: NULL       Collation: latin1_swedish_ci       Checksum: NULL       Create_options:       Comment:</pre> <p>If the command output shows the engine as InnoDB, we don't need to run the alter_table_Elap_11.0.pl. If the engine is already InnoDB, then skip step 10,11,12 and jump to restart Elap application. If the engine is MyISAM, continue with the next steps in this procedure.</p>
10.	<b>ACTIVE ELAP:</b>	<p>Follow the steps mentioned below to change the mysql engine from MyISAM to InnoDB:</p> <ol style="list-style-type: none"> <li>1. Download the alter_Table_Elap_11.0.pl script.</li> <li>2. Keep it in /usr/TKLC/elap/bin directory.</li> <li>3. Update the permissions. <pre>cd /usr/TKLC/elap/bin chmod 755 alter_Table_Elap_11.0.pl chown elapdev:elap alter_Table_Elap_11.0.pl</pre> </li> <li>4. Switch to elapdev user. <pre>su - elapdev</pre> </li> <li>5. Run the script. <pre>cd /usr/TKLC/elap/bin/ ./alter_Table_Elap_11.0.pl</pre> </li> </ol> <p><b>Example:</b></p> <pre>[elapdev@Devloan03 ~]\$ cd /usr/TKLC/elap/bin/ [elapdev@Devloan03 bin]\$ ./alter_Table_Elap_11.0.pl Success.</pre>

11.	<b>Active ELAP:</b> Check the update by logging in to EuiDB:	<pre>[epapdev@Manaus-A free]\$ mysql -uroot -p&lt;mysql_password&gt; mysql&gt; use EuiDB; Reading table information for completion of table and column names You can turn off this feature to get a quicker startup with -A mysql&gt; show table status\G; ***** 1. row ***** Name: alarmInfo Engine: InnoDB Version: 10</pre>
12.	<b>Active ELAP:</b> Take the EuiDB backup again after converting the engine from MyISAM to InnoDB.	Repeat Steps 3 to 8 of this <a href="#">Procedure 5</a> to take the EuiDB backup again for InnoDB.
13. <input type="checkbox"/>	<b>Active ELAP:</b> Re-start the ELAP Application for Active ELAP.	<pre>[root@E5APP-B-b ~]# service Elap start [root@E5APP-B-b ~]#</pre>
14. <input type="checkbox"/>	<b>Active ELAP:</b> Note down the timestamp in log.	Run the following command \$ date

**This procedure is complete!**

**Procedure 6 DISCONNECT ELAP FROM LSMS**

<b>S T E P #</b>	<p>This procedure provides instructions to stop LSMS connection.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>IF THIS PROCEDURE FAILS, CONTACT ORACLE TECHNICAL SERVICES AND ASK FOR UPGRADE ASSISTANCE.</p>	
1. <input type="checkbox"/>	<p><b>Active ELAP GUI:</b></p> <p>Login as uiadmin using the default password.</p> <p> </p> <p>*Note ELAP Version may differ than example image shown.</p>	

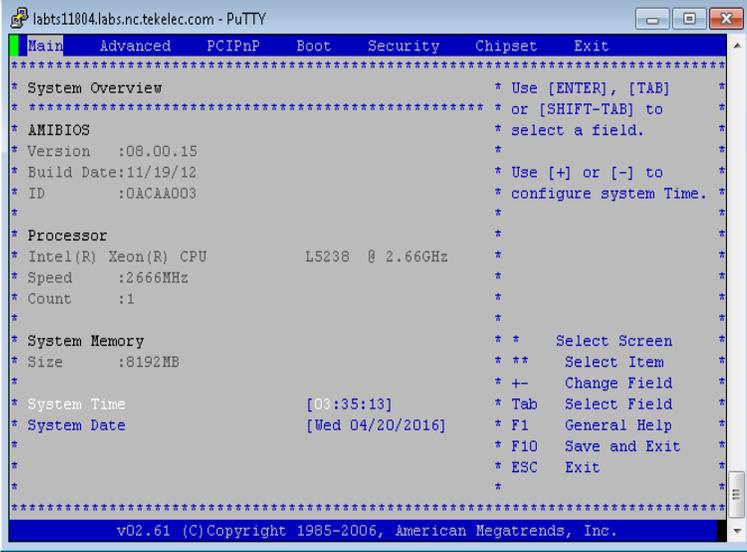
<p>2. <input type="checkbox"/></p>	<p><b>Active ELAP GUI:</b></p> <p>1) Expand the “Maintenance → LSMS Connection” folder.</p> <p>2) Select the “Change Allowed” link.</p>	 <p>ELAP A: uiadmin</p> <ul style="list-style-type: none"> <li>+ Process Control</li> <li>- Maintenance             <ul style="list-style-type: none"> <li>- High Availability                 <ul style="list-style-type: none"> <li>View Status</li> <li>Change Settings</li> <li>Display Release Levels</li> <li>Decode MPS Alarm</li> <li>View Alarms</li> <li>Automatic RTDB Backup</li> </ul> </li> <li>+ RTDB Audit</li> <li>+ LSMS HS Bulk Download</li> <li>- <b>LSMS Connection</b> <ul style="list-style-type: none"> <li>View Allowed</li> <li><b>Change Allowed</b></li> <li>Schedule ELAP Tasks</li> </ul> </li> <li>+ ELAP Transaction Logging</li> </ul> </li> <li>+ RTDB</li> <li>+ Debug</li> <li>+ Platform</li> <li>+ User Administration             <ul style="list-style-type: none"> <li>Change Password</li> <li>Logout</li> </ul> </li> </ul>
<p>3. <input type="checkbox"/></p>	<p><b>Active ELAP GUI:</b></p> <p>In the right panel, click the “Disable LSMS Connection” button.</p>	 <p><b>i</b> INFO: The LSMS Connection is currently Enabled.</p> <p><b>!</b> CAUTION: This action will Disable the LSMS Connection.</p> <p>Disable LSMS Connection</p>
<p>4. <input type="checkbox"/></p>	<p><b>3.3.1.1 ELAP A GUI:</b></p> <p>A message indicating that the LSMS Connection is now Enabled should appear in the right panel.</p>	 <p><b>✓</b> SUCCESS: The LSMS Connection is now Disabled.</p>

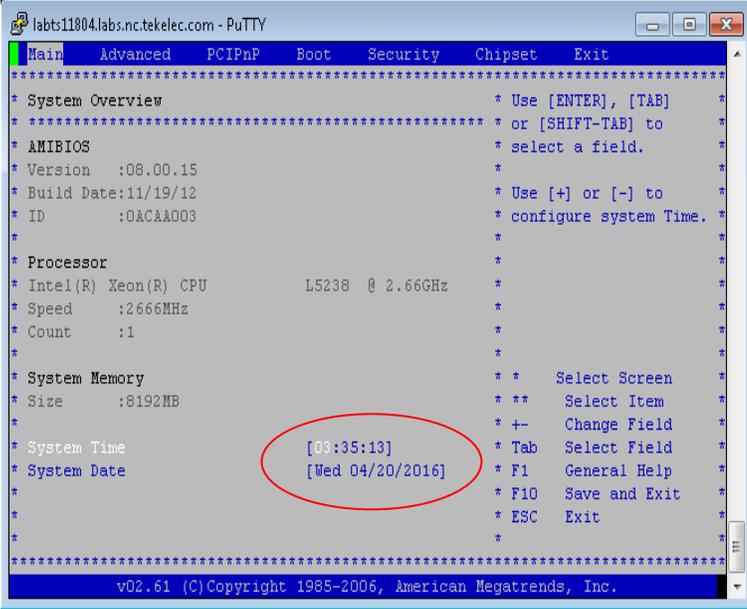
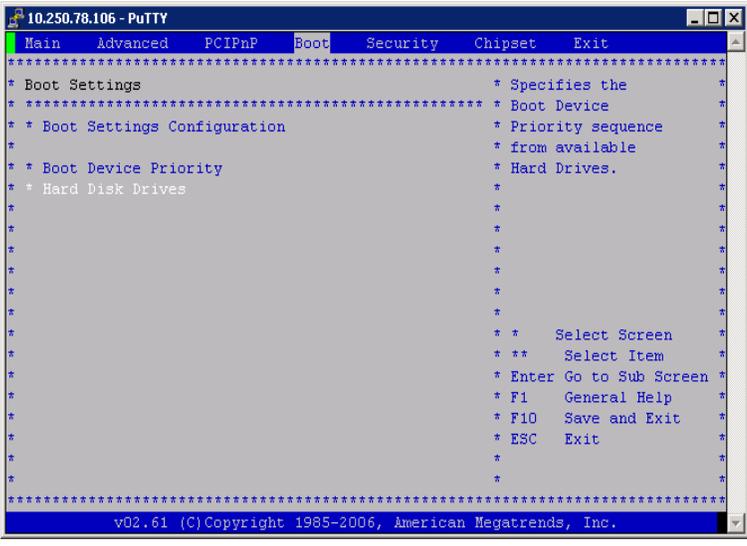
**This procedure is complete!**

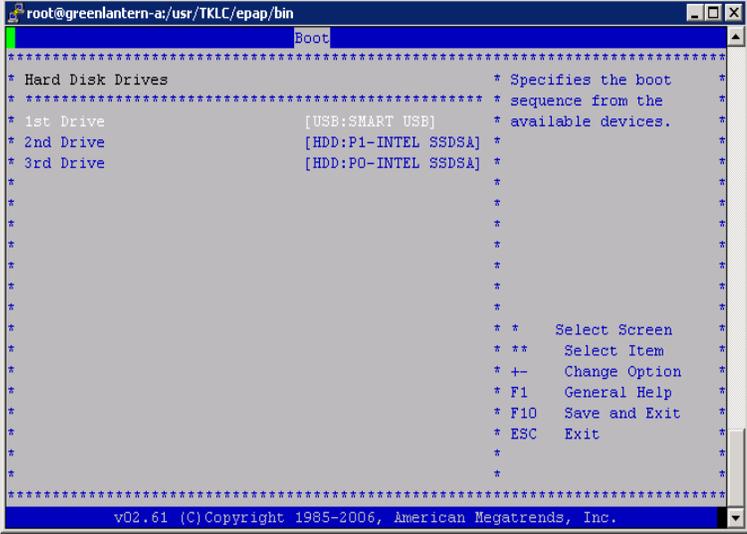
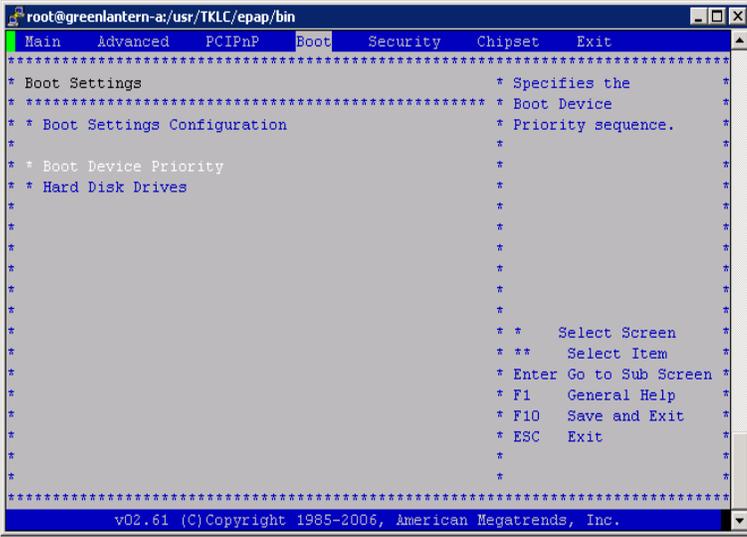


### 3.4 IPM and ELAP 11.0.x Installation

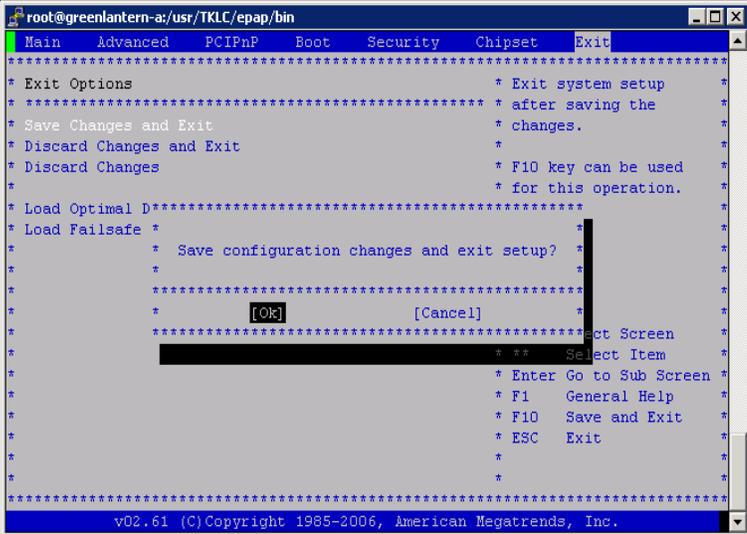
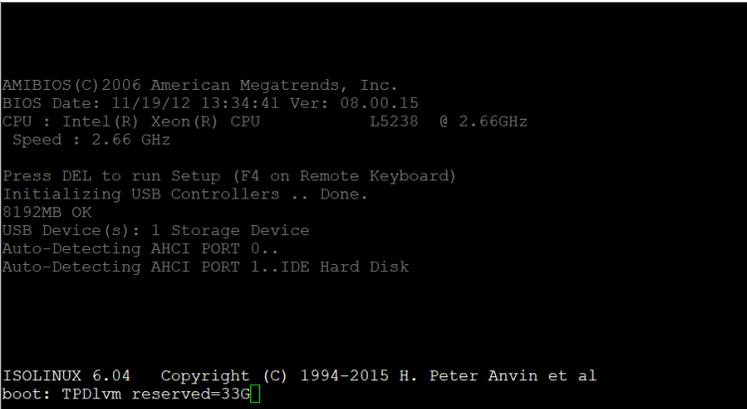
#### Procedure 7 IPM MPS SERVER WITH TPD 8.10.X

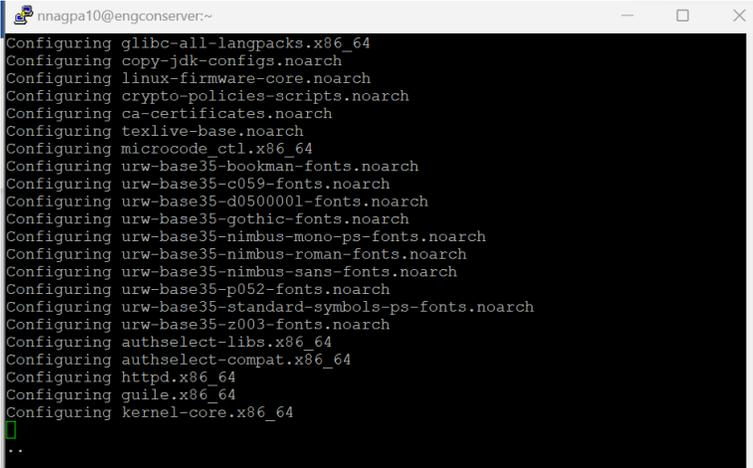
S T E P #	A	B	<p>This procedure will install TPD.</p> <p><b>Note: Estimated time of completion is 45 minutes.</b></p> <p>Check off (√) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>Should this procedure fail, Contact Oracle technical services and ask for <b>FULL UPGRADE ASSISTANCE.</b></p>	
1.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Insert TPD 8.10.xUSB media into the USB port (E5-APP-B).</p>	
2.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> If necessary, log in to the server as the user “root”.</p>	<p>Login to the MPS server as “root” user by Following steps in <b>Procedure 1.</b></p>
3.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Reboot server.</p>	<p># reboot</p>
4.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Press ‘del’ key to enter the BIOS when the system starts up after reboot (Use ‘F4’ key in case of Remote keyboard).</p>	

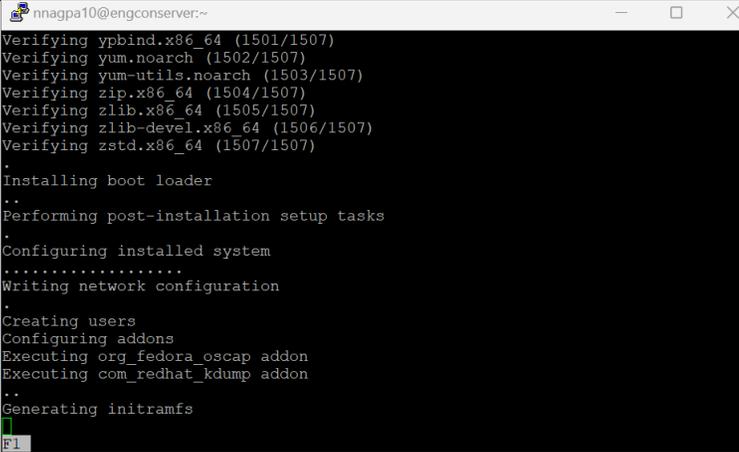
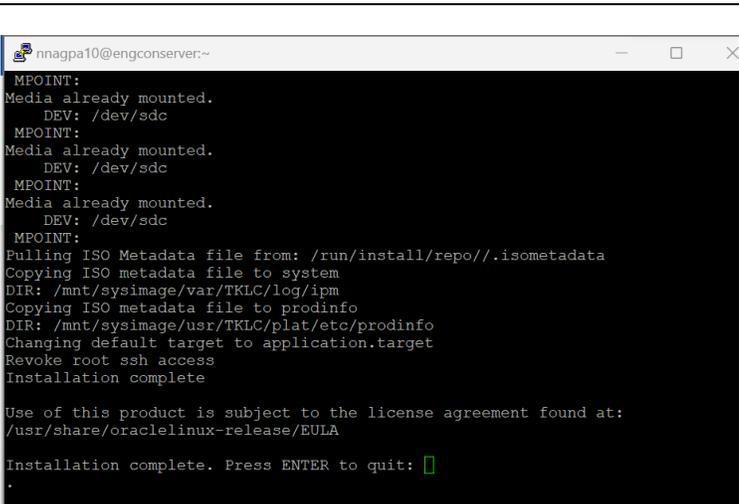
<p>5.</p>	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b>  <b>Set the System Time and Date to UTC time.</b>                  Press 'Enter' key to select the various fields (hh/mm/ss) of system time and system date (mm/dd/yyyy).                   Use UP or DOWN arrow keys to select between System Time and System Date.</p>	
<p>6.</p>	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b>                  Select <i>Boot</i> → <i>Hard Disk Drives</i> option.</p>	
<p>7.</p>	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b>                  Press 'Enter' key and select USB as the 1<sup>st</sup> Drive.</p>	

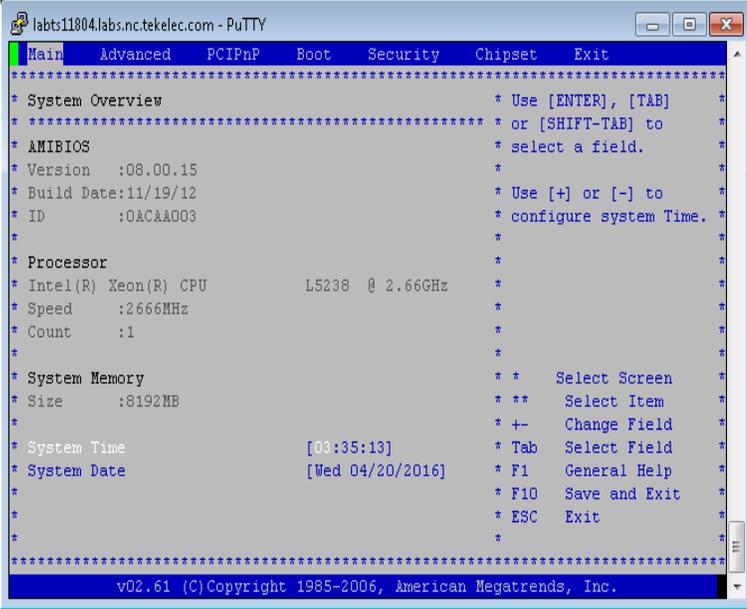
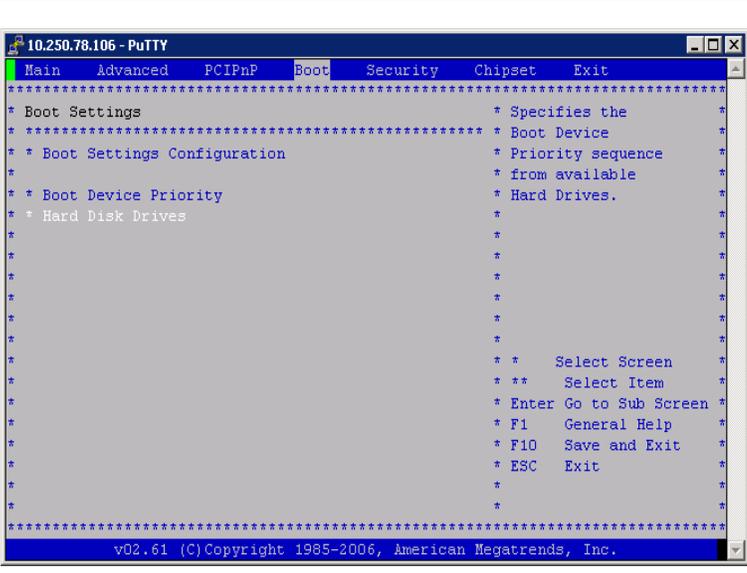
				
8.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Press 'Esc' key and select Boot Device Priority.</p>	
9.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Verify that the 1<sup>st</sup> Boot Device is set to USB.</p>	

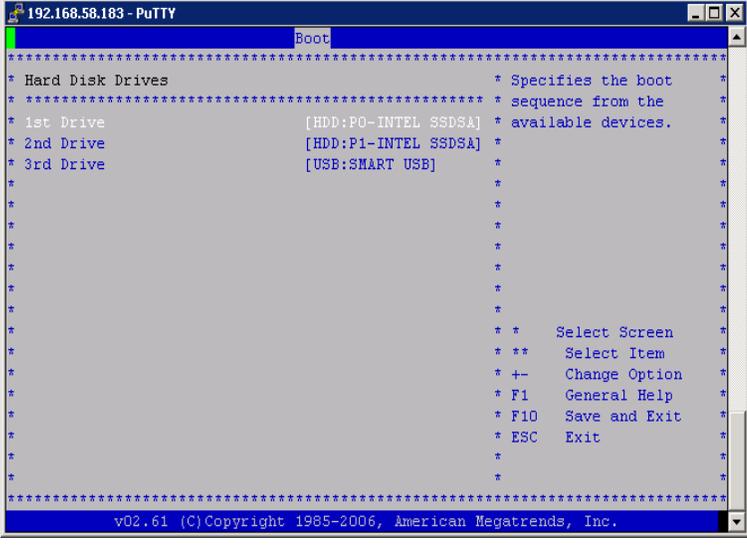
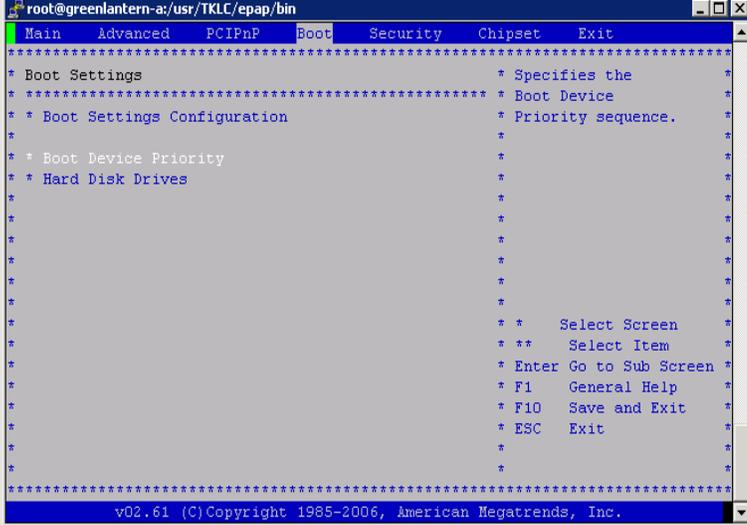
<p>10. <input type="checkbox"/> <input type="checkbox"/></p>		<p><b>MPS X:</b> Press 'Esc' key and select <i>Exit</i> → <i>Save Changes and Exit</i> option.</p>	
<p>11. <input type="checkbox"/> <input type="checkbox"/></p>		<p><b>MPS X:</b> Select [OK] to save the configuration changes.  The server will reboot and TPD boot prompt will appear.</p>	

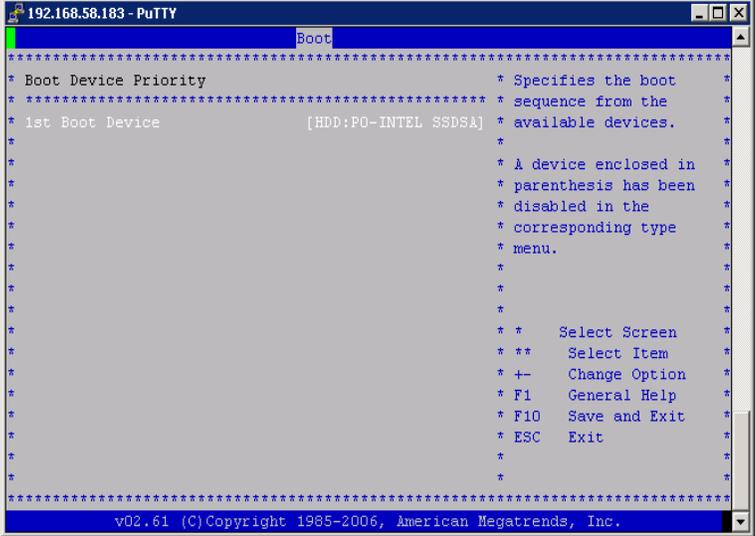
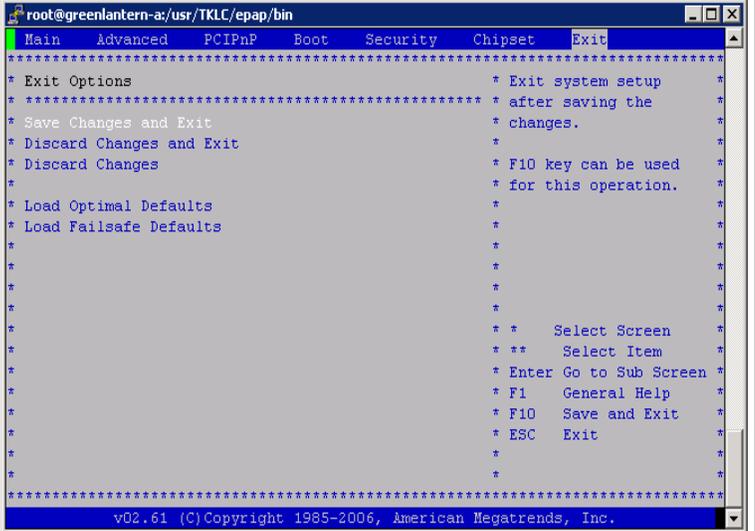
				
12.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Start the IPM process by entering the TPD command at the boot prompt.</p> <p><b>WARNING: You must add the "reserved=33G" parameter at the TPD boot prompt. Failure to TPD using this parameter will require this procedure to be repeated!!!</b></p>	<p><b>boot: TPD vm scrub reserved=33G</b></p> 
13.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> After a few seconds, additional messages will begin scrolling by on the screen as the Linux kernel boots, and then the drive formatting and file system creation steps will begin.</p>	

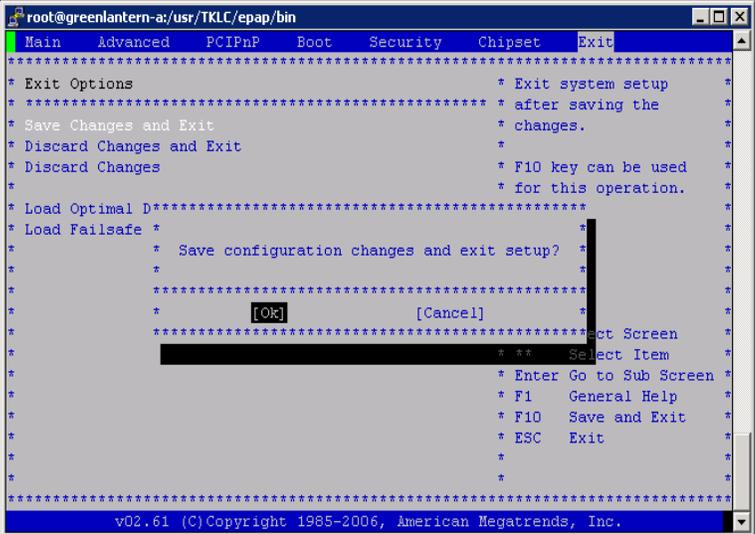
				
14.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b></p> <p>Once the drive formatting and file system creation steps are complete, the screen at right will appear indicating that the package installation step is about to begin.</p>	
15.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b></p>	

		<p>After a few minutes, you will see a screen similar to that at right, showing the status of the package installation step. For each package, there will be a status bar at the top indicating how much of the package has been installed, with a cumulative status bar at the bottom indicating how many packages remain. In the middle, you will see text statistics indicating the total number of packages, the number of packages installed, the number remaining, and current and projected time estimates.</p>	 <pre> nnagpa10@engconserver:~ Verifying ypbind.x86_64 (1501/1507) Verifying yum.noarch (1502/1507) Verifying yum-utils.noarch (1503/1507) Verifying zip.x86_64 (1504/1507) Verifying zlib.x86_64 (1505/1507) Verifying zlib-devel.x86_64 (1506/1507) Verifying zstd.x86_64 (1507/1507) . Installing boot loader .. Performing post-installation setup tasks . Configuring installed system ..... Writing network configuration . Creating users Configuring addons Executing org_fedora_oscaped addon Executing com_redhat_kdump addon .. Generating initramfs [ ]     </pre>
16.	<input type="checkbox"/>	<p><b>MPS X:</b></p> <p>Once all the packages have been successfully installed, the screen at right will appear letting you know the installation process is complete. Press enter key here to let the system reboot.</p>	 <pre> nnagpa10@engconserver:~ MPOINT: Media already mounted. DEV: /dev/sdc MPOINT: Media already mounted. DEV: /dev/sdc MPOINT: Media already mounted. DEV: /dev/sdc MPOINT: Pulling ISO Metadata file from: /run/install/repo//.isometadata Copying ISO metadata file to system DIR: /mnt/sysimage/var/TKLC/log/ipm Copying ISO metadata file to prodinfo DIR: /mnt/sysimage/usr/TKLC/plat/etc/prodinfo Changing default target to application.target Revoke root ssh access Installation complete  Use of this product is subject to the license agreement found at: /usr/share/oraclelinux-release/EULA  Installation complete. Press ENTER to quit: [ ]     </pre>

<p>17.</p>	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Press 'del' key to enter the BIOS when the system starts up after reboot. (Use 'F4' key in case of Remote keyboard).</p>	 <p>The screenshot shows the BIOS Main menu with the following options: Main, Advanced, PCIPnP, Boot, Security, Chipset, and Exit. The menu is titled 'labts11804.labs.nc.tekelec.com - PuTTY'. The System Overview section includes: System Overview, AMIBIOS (Version: 08.00.15, Build Date: 11/19/12, ID: 0ACAA003), Processor (Intel(R) Xeon(R) CPU L5238 @ 2.66GHz, Speed: 2666MHz, Count: 1), System Memory (Size: 8192MB), System Time (03:35:13), and System Date (Wed 04/20/2016). Navigation instructions are provided for various keys like [ENTER], [TAB], [SHIFT-TAB], [+], [-], Tab, F1, F10, and ESC.</p>
<p>18.</p>	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Select <i>Boot</i> → <i>Hard Disk Drives</i> option</p>	 <p>The screenshot shows the BIOS Boot menu with the following options: Main, Advanced, PCIPnP, Boot, Security, Chipset, and Exit. The menu is titled '10.250.78.106 - PuTTY'. The Boot Settings section includes: Boot Settings, Boot Settings Configuration, Boot Device Priority, and Hard Disk Drives. Navigation instructions are provided for various keys like [ENTER], [TAB], [SHIFT-TAB], [+], [-], Tab, F1, F10, and ESC.</p>
<p>19.</p>	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Press 'Enter' key and select HDD:P0 as the 1<sup>st</sup> Drive</p>	

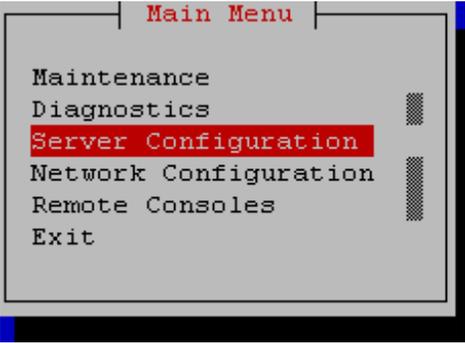
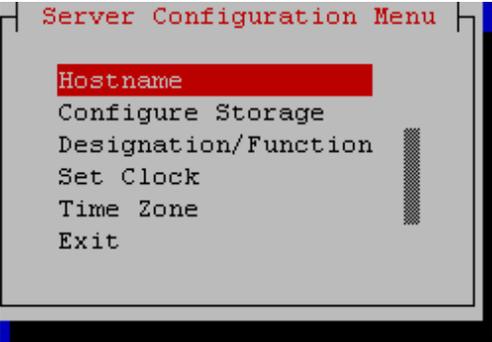
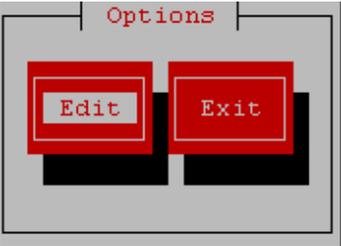
				
20.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Press 'Esc' key and select Boot Device Priority</p>	
21.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Verify that the 1<sup>st</sup> Boot Device is set to HDD:P0.</p>	

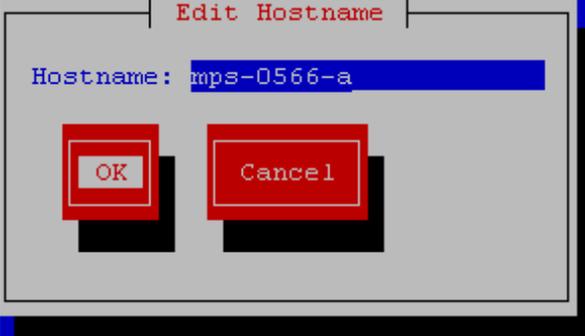
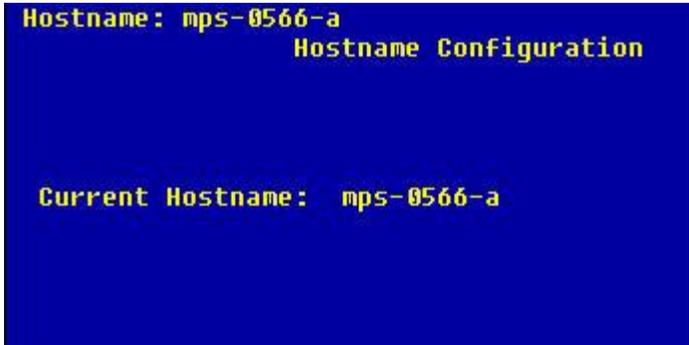
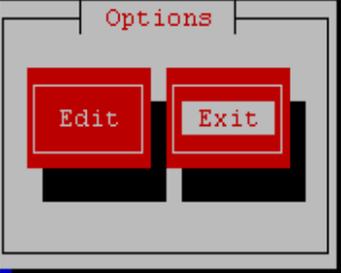
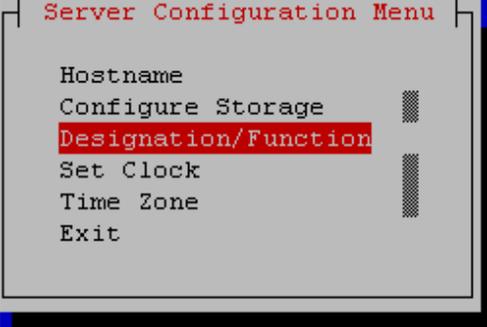
			
<p>22.</p>	<input type="checkbox"/>	<p><b>MPS X:</b> Press 'Esc' key and select <i>Exit</i> → <i>Save Changes and Exit</i> option</p>	
<p>23.</p>	<input type="checkbox"/>	<p><b>MPS X:</b> Select [OK] to save the configuration changes. The server will reboot.  Remove the TPD USB media from the USB port.</p>	

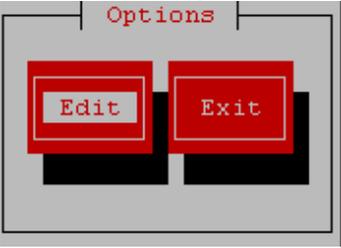
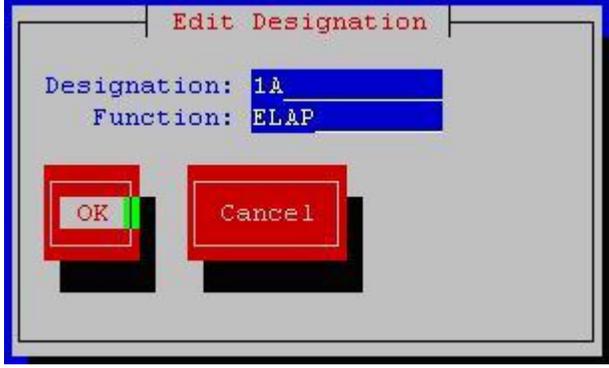
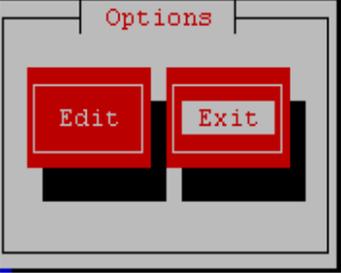
				
24.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Log in to the server as the user “root”</p>	<pre>console login: root password: &lt;root_password&gt;</pre>
25.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Perform a syscheck.</p> <p>Inspect the output and ensure that no errors are present. If an error is present, contact My Oracle Support for guidance.</p>	<pre># syscheck Running modules in class net... OK Running modules in class hardware... OK Running modules in class disk... OK Running modules in class system... OK Running modules in class proc... OK  LOG LOCATION: /var/TKLC/log/syscheck/fail_log #</pre>
26.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b></p> <p>Verify that the platform revision is same as the TPD USB or ISO used.</p>	<pre># getPlatRev 8.10.1.9.0_150.20.0</pre> <p>If there is any failure during IPM or the platform revision is not correct, repeat this procedure to IPM again. If the same issue persists after the second attempt, contact Oracle technical services and ask for FULL UPGRADE ASSISTANCE.</p>
27.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Note down the timestamp in log.</p>	<pre>Run the following command \$ date</pre>

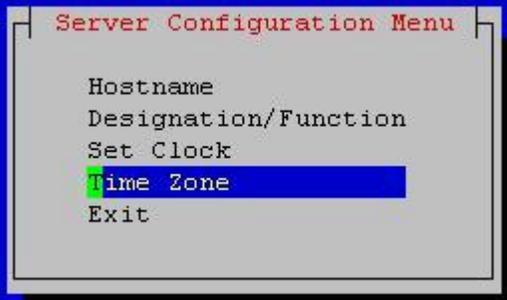
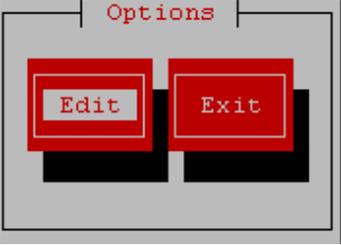
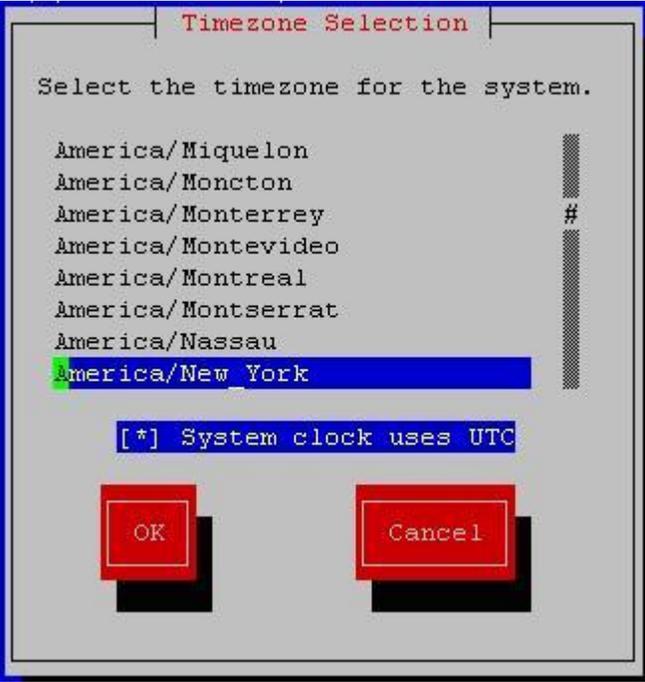
**This procedure is complete!**

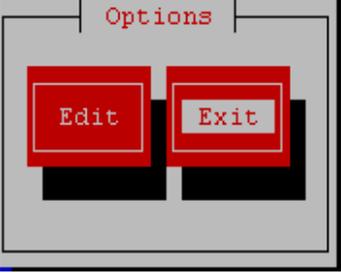
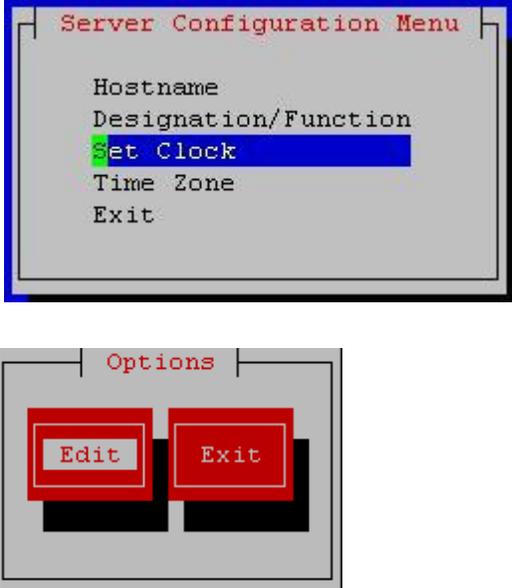
**Procedure 8 PRE-INSTALL CONFIGURATION**

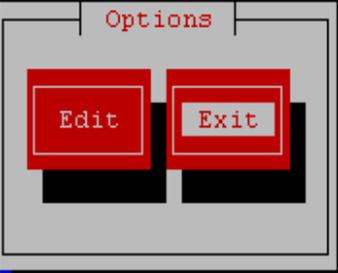
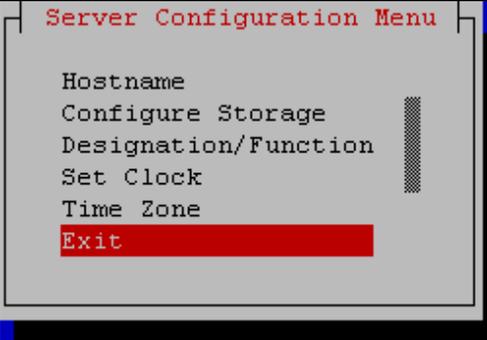
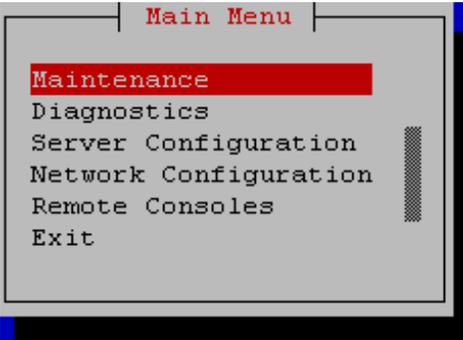
STEP #	A	B	<p>This procedure will perform the initial configuration required for ELAP installation.</p> <p><b>Note: Estimated time of completion is 15 minutes.</b></p> <p>Check off (√) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>Should this procedure fail, Contact Oracle technical services and ask for <b>FULL UPGRADE ASSISTANCE</b>.</p>
1.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> log in to the server console as the user “root”</p> <p><b>console login: root</b> <b>password: &lt;root_password&gt;</b></p>
2.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b></p> <p>Switch user to platcfg.</p> <p>Select “Server Configuration” Menu</p> <p><b># su - platcfg</b></p> 
3.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b></p> <p>Select “Hostname” Menu</p> 
4.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b></p> <p>1) Select “Edit” from the options dialogue box.</p> <p>2) Set the hostname</p> 

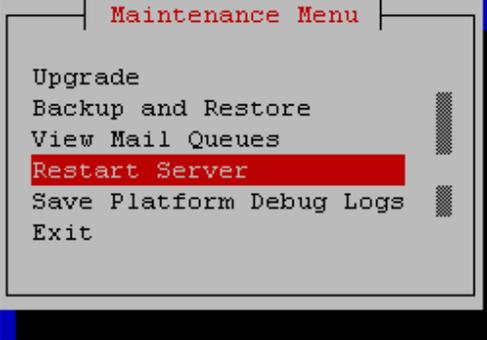
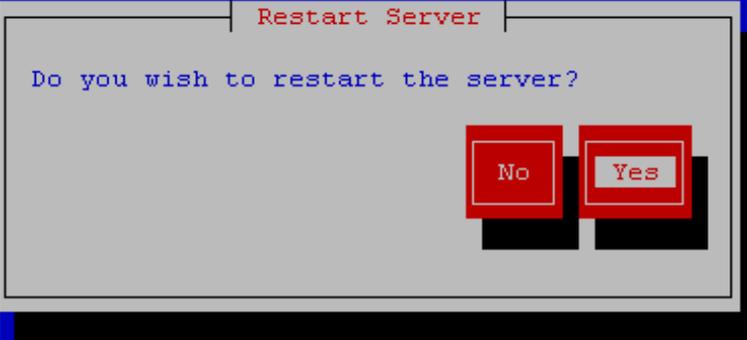
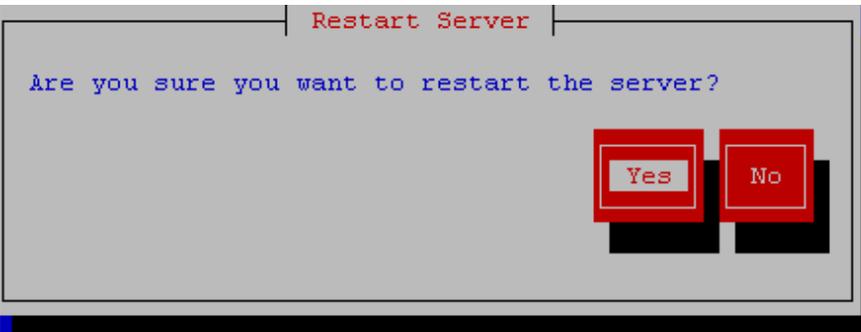
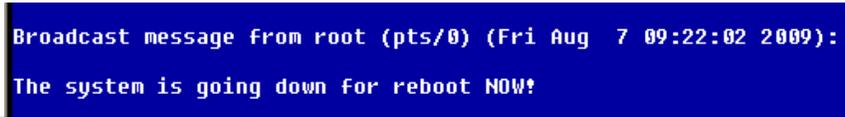
				
<p>5.</p>	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Verify that the Hostname is correct then select and press "Exit".</p> <p>Otherwise repeat the step above.</p>	 
<p>6.</p>	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Select "Designation/Function" Menu</p>	

<p>7.</p>	<input type="checkbox"/>	<p><b>MPS X:</b></p> <p>1) Select “Edit” from the options dialogue box.</p> <p>2) Set the Designation as “1A” on Server A and as “1B” on Server B, Function as “ELAP” and press “OK”.</p> <p><b>NOTE:</b></p> <p>Designation and Function should be entered in UPPERCASE.</p>	 
<p>8.</p>	<input type="checkbox"/>	<p><b>MPS X:</b></p> <p>Verify that the Designation and Hostname information is correct then select and press “Exit”.</p> <p>Otherwise repeat the step above.</p>	  <p>The values should be as follows.</p> <ol style="list-style-type: none"> <li>1. The Designation is:             <ol style="list-style-type: none"> <li>a. “1A” for the A server</li> <li>b. “1B” for the B server</li> </ol> </li> <li>2. The Function field should be set to ELAP.</li> </ol> <p>If either value is not correct, then select <b>Edit</b> and press [ENTER].              If both values are correct, select <b>Exit</b>, press [ENTER].</p>

9.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Using the arrow keys navigate to the “Time Zone” menu and press Enter.</p> <p>Select the “Edit” button and press Enter.</p>	 
10.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Using the arrow keys navigate to the appropriate “Time Zone” selection. Ensure that it is highlighted.</p> <p>Ensure the “System clock uses UTC” is set. If it is not set use the “Tab” key to highlight it and press the “Space Bar”.</p> <p>Once the appropriate time zone is highlighted press the “Tab” key to highlight the “OK”</p>	

		<p>button and press Enter.</p> <p>Using the “Tab” or arrow keys highlight the “Exit” button and press Enter.</p>	
<p>11.</p>	<input type="checkbox"/>	<input type="checkbox"/> <p><b>MPS X:</b> Using the arrow keys navigate to the appropriate “Set Clock” menu and press Enter.</p> <p>Using the “Tab” key highlight the “Edit” button and press Enter.</p>	
<p>12.</p>	<input type="checkbox"/>	<input type="checkbox"/> <p><b>MPS X:</b> If the date and time is not same as the current date and time, set them using the “Tab” key to cycle between the fields.</p> <p>Using the “Tab” key navigate to the “OK” button and press Enter.</p>	

				
13.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Using the “Tab” key navigate to the “Exit” button and press Enter.</p>	
14.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Exit the platcfg menu</p>	
15.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Select the menu options as indicated in the screen captures to the right in order to restart the server.</p>	

			  
16.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> The system should reboot.</p> 
17.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Log in to the server as the user "root"</p> <pre>console login: root password: &lt;root_password&gt;</pre>
18.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Perform syscheck.  Inspect the output and ensure that no errors are</p> <pre># syscheck Running modules in class net... OK Running modules in class hardware... OK Running modules in class disk... OK Running modules in class system...</pre>

			present. If an error is present contact Oracle Customer Care for guidance.	OK Running modules in class proc... OK LOG LOCATION: /var/TKLC/log/syscheck/fail_log #
19.	<input type="checkbox"/>	<input type="checkbox"/>	<b>MPS X:</b> Note down the timestamp in log.	Run the following command \$ date

**This procedure is complete!**

**Procedure 9 INSTALL THE ELAP APPLICATION**

<b>S T E P #</b>	<p>This procedure installs the application on the server.</p> <p>Check off (✓)each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>IF THIS PROCEDURE FAILS, CONTACT THE TEKELEC CUSTOMER CARE CENTER AND ASK FOR ASSISTANCE.</p>	
1. <input type="checkbox"/>	<p><b>MPS A:</b> Log in as “admusr” user.</p>	<p>If not already logged in, then login as “admusr”:</p> <pre>consolelogin: admusr password: password</pre>
2. <input type="checkbox"/>	<p><b>MPS A:</b> Put ISO image on ELAP server.</p>	<p>Use any of the following methods to put ELAP 10.2 ISO image on the ELAP server.</p> <ol style="list-style-type: none"> <li>a. Perform ISO image generation from USB media using <b>Appendix B</b></li> <li>b. Copy ISO to /var/TKLCL/upgrade directory. Note: To execute this step, the provisional IP of the ELAP server must be set via platcfg menu.</li> </ol>
3. <input type="checkbox"/>	<p><b>MPS A:</b> Start platcfg utility.</p>	<pre>\$sudo su - platcfg</pre>
4. <input type="checkbox"/>	<p><b>MPS A:</b> Select the Maintenance submenu.</p>	<p>The platcfg <b>Main Menu</b> appears. On the <b>Main Menu</b>, select <b>Maintenance</b> and press [ENTER].</p> <pre>+-----+ Main Menu +-----+   Maintenance           ^     Diagnostics           #     Server Configuration  :     Network Configuration :     Security               :     Remote Consoles       :     Exit                   v   +-----+</pre> <p>Select the <b>Upgrade</b> menu and press [ENTER].</p> <pre>+-----+ Maintenance Menu +-----+   Upgrade               ^     Halt Server           #     Backup and Restore    :     View Mail Queues      :     Restart Server        :     Eject CDROM           :     Save Platform Debug Logs :     Exit                   v   +-----+</pre> <p>Select the <b>Validate media</b> menu and press [ENTER].</p>



```

+-----+ Upgrade Menu +-----+
|
| Validate Media                ^
| Early Upgrade Checks        :
| Initiate Upgrade              #
| Copy USB Upgrade Image        :
| Non Tekelec RPM Management    :
| Exit                          v
|
+-----+

```

Early upgrade checks should be passed before upgrade is started.

```

Starting Early Upgrade Checks at 1461120777
Running earlyUpgradeChecks() for Upgrade::EarlyPolicy::TPDEarlyChecks upgrade po
licy...
Verified server is not pending accept of previous upgrade
Hardware architectures match
Install products match.
No Application installed yet.. Skip alarm check!
Verified all raid mirrors are synced.
Early Upgrade Checks Have Passed!
User has requested just to run early checks.
No upgrade will be performed...
Early Upgrade Checks finished at 1461120782

PRESS ANY KEY TO RETURN TO THE PLATCFG MENU.

```

If the Early Upgrade Checks fail due to the ongoing syncing of raid mirrors, then wait until the resync is completed and run the “Early Upgrade Checks” again.

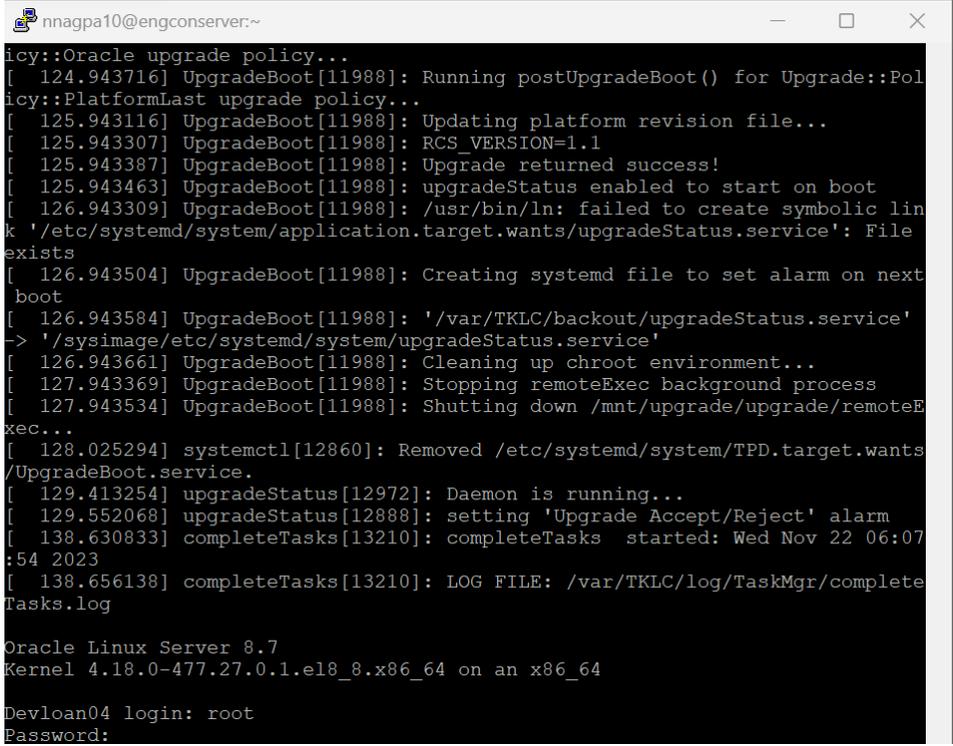
```

Early Checks failed for the next upgrade
Look at earlyChecks.log for more info
Starting Early Upgrade Checks at 1464335149
Running earlyUpgradeChecks() for Upgrade::EarlyPolicy::TPDEarlyChecks upgrade po
licy...
Verified server is not pending accept of previous upgrade
ERROR: Raid mirrors are syncing!
ERROR: md3 is syncing!
ERROR: earlyUpgradeChecks() code failed for Upgrade::EarlyPolicy::TPDEarlyChecks
ERROR: Failed running earlyUpgradeChecks() code
Hardware architectures match
Install products match.
No Application installed yet.. Skip alarm check!
ERROR: Early Upgrade Checks Failed!
User has requested just to run early checks.
No upgrade will be performed...
Early Upgrade Checks finished at 1464335150

PRESS ANY KEY TO RETURN TO THE PLATCFG MENU

```



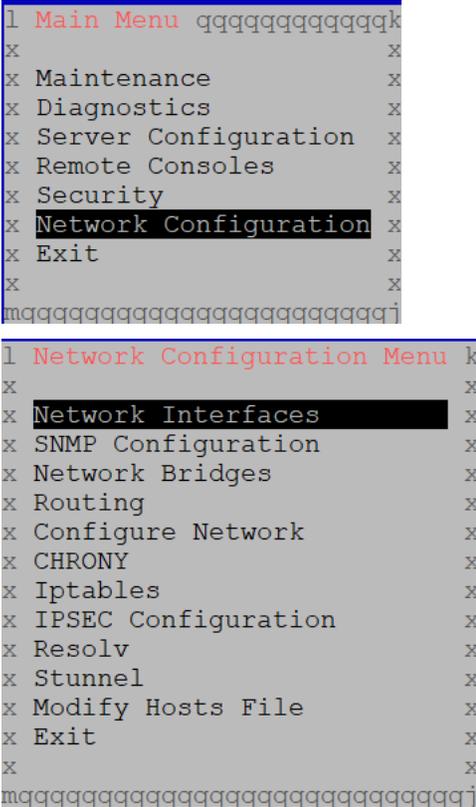
<p>6. <input type="checkbox"/></p>	<p><b>MPS A:</b> Press [ENTER] to start installation.</p> <p>Many informational messages will come across the terminal screen as the installation proceeds.</p> <p>Finally, after successful completion of ELAP install, the server should reboot, and login prompt should appear</p>	<p>After the final reboot, the screen displays the login prompt as in the example below.</p>  <p>The screenshot shows a terminal window with the following content:</p> <pre> nnagpa10@engconserver:~ icy::Oracle upgrade policy... [ 124.943716] UpgradeBoot[11988]: Running postUpgradeBoot() for Upgrade::Pol icy::PlatformLast upgrade policy... [ 125.943116] UpgradeBoot[11988]: Updating platform revision file... [ 125.943307] UpgradeBoot[11988]: RCS_VERSION=1.1 [ 125.943387] UpgradeBoot[11988]: Upgrade returned success! [ 125.943463] UpgradeBoot[11988]: upgradeStatus enabled to start on boot [ 126.943309] UpgradeBoot[11988]: /usr/bin/ln: failed to create symbolic lin k '/etc/systemd/system/application.target.wants/upgradeStatus.service': File exists [ 126.943504] UpgradeBoot[11988]: Creating systemd file to set alarm on next boot [ 126.943584] UpgradeBoot[11988]: '/var/TKLC/backout/upgradeStatus.service' -&gt; '/sysimage/etc/systemd/system/upgradeStatus.service' [ 126.943661] UpgradeBoot[11988]: Cleaning up chroot environment... [ 127.943369] UpgradeBoot[11988]: Stopping remoteExec background process [ 127.943534] UpgradeBoot[11988]: Shutting down /mnt/upgrade/upgrade/remotE xec... [ 128.025294] systemctl[12860]: Removed /etc/systemd/system/TPD.target.wants /UpgradeBoot.service. [ 129.413254] upgradeStatus[12972]: Daemon is running... [ 129.552068] upgradeStatus[12888]: setting 'Upgrade Accept/Reject' alarm [ 138.630833] completeTasks[13210]: completeTasks started: Wed Nov 22 06:07 :54 2023 [ 138.656138] completeTasks[13210]: LOG FILE: /var/TKLC/log/TaskMgr/comple Tasks.log  Oracle Linux Server 8.7 Kernel 4.18.0-477.27.0.1.el8_8.x86_64 on an x86_64  Devloan04 login: root Password: </pre>
<p>7. <input type="checkbox"/></p>	<p><b>MPS A:</b> Verify that installation is complete, and no error occurred during installation.</p>	<p>Switch to root user to grep the errors occurred during installation.</p> <pre> \$su - Password: &lt;root_password&gt;  \$ grep "Upgrade returned success" /var/TKLC/log/upgrade/upgrade.log 1461121282::Upgrade returned success!  \$ grep -i error /var/TKLC/log/upgrade/upgrade.log </pre> <p>Check the output of the upgrade log, contact the My Oracle Support by following the instructions in the 0, if the output contains any errors beside the following:</p> <p>Variable and RPMs that might contain the word error in them.</p> <p>All those messages are expected, and therefore aren't considered errors.</p> <pre> \$grep -i error /var/TKLC/log/upgrade/ugwrap.log </pre> <p>Check the output of the ugwrap log. If the output contains any errors, contact the My Oracle Support by following the instructions in the 0.</p>

		<p><b>NOTE: After ELAP installation is complete, the below mentioned logging is observed on ELAP CLI. These errors can be ignored, and they will not be observed, once the key exchange is performed successfully.</b></p> <pre># drbd drbd0/0 drbd0: ambiguous node id: meta-data: 0, config: 1 WARN: stdin/stdout is not a TTY; using /dev/console..... *****  DRBD's startup script waits for the peer node(s) to appear. - If this node was already a degraded cluster before the   reboot, the timeout is 5 seconds. [degr-wfc-timeout] - If the peer was available before the reboot, the timeout   is 10 seconds. [wfc-timeout]   (These values are for resource 'drbd0'; 0 sec -&gt; wait forever) To abort waiting enter 'yes' [ 10]:  # drbd drbd0: State change failed: Can not disconnect a StandAlone device # drbd drbd0: State change failed: Can not disconnect a StandAlone device # drbd drbd0: State change failed: Can not disconnect a StandAlone device  'drbd drbd0 tcp:unknown-b: Closing unexpected connection from 192.168.61.104' &amp; 'drbd drbd0 tcp:unknown-b: Closing unexpected connection from 192.168.61.105'  <b>NOTE: After ELAP installation is complete, gsConnect.pl core is observed on the server which can be ignored and deleted from the server.</b>  \$ls -lrt /var/TKLC/core -rw----- 1 root root 49807360 Jul 26 01:52 core.gsConnect.pl.7030 -rw-r----- 1 root root 2248 Jul 26 01:53 core.gsConnect.pl.7030.bt  Delete core file using below command: <b>\$ rm /var/TKLC/core/ core.gsConnect*</b></pre>
<p>8. <input type="checkbox"/></p>	<p><b>MPS A:</b> Log in as “elapdev” user.</p>	<p>If not already logged in, then login as “elapdev”:</p> <pre>consolelogin: elapdev password: password</pre>
<p>9. <input type="checkbox"/></p>	<p><b>MPS A:</b> Verify ELAP release.</p>	<pre>\$ rpm -qi TKLCelap  Name      : TKLCelap Version   : 5.0.65 Release   : 11.0.0.0_110.3.0 Architecture: x86_64 Install Date: Tue 21 Nov 2023 03:46:04 AM EST Group     : Development/Build Size      : 197639393 License   : TEKELEC 2018 Signature : (none) Source RPM : TKLCelap-5.0.65-11.0.0.0_110.3.0.src.rpm Build Date : Thu 16 Nov 2023 03:02:21 AM EST Build Host : coach-14.tekelec.com Relocations : (not relocatable)</pre>

		<p>Packager : &lt;@tekelec.com&gt;  Vendor : Tekelec  URL : http://www.tekelec.com/  Summary : Oracle Communications ELAP Package  Description :</p> <p>This is the Oracle Communications EAGLE LNP Application Processor(ELAP) package.  The package installs ELAP software. Eagle LNP Application Processor (ELAP) provides REALLY INCREDIBLE Database (RIDB). ELAP provides the LNP feature.</p>
10. <input type="checkbox"/>	<b>MPS A and B:</b> Update ssh_config to disable MD5 and MAC algorithm for security	<p>Perform following steps to disable unsecure algorithm for ssh:</p> <p>1)</p> <pre>\$ grep "MACs hmac-md5,hmac-md5-96," /etc/ssh/ssh_config</pre> <p>If no output is displayed for above command skip this step and go to 2<sup>nd</sup> part of this step else continue to next command.</p> <pre>\$ rcstool co /etc/ssh/ssh_config</pre> <pre>\$ sed -i '/MACs hmac-md5,hmac-md5-96,hmac-sha1-96/d' /etc/ssh/ssh_config</pre> <pre>\$ rcstool ci /etc/ssh/ssh_config</pre> <pre>\$ systemctl restart sshd</pre> <p>Now do the same for mac.</p> <p>2)</p> <pre>\$ grep "MACs hmac-sha2-256,hmac-sha2-512" /etc/ssh/sshd_config</pre> <p>If no output is displayed for above command continue to next command else skip this step and go to next step of this procedure.</p> <pre>\$ rcstool co /etc/ssh/sshd_config</pre> <pre>\$ sed -i -e '\$ a MACs hmac-sha2-256,hmac-sha2-512' /etc/ssh/sshd_config</pre> <pre>\$ rcstool ci /etc/ssh/sshd_config</pre> <pre>\$ systemctl restart sshd</pre>
11. <input type="checkbox"/>	<b>MPS A :</b> Procedure complete.	This procedure is complete.

**This procedure is complete!**

**Procedure 10 CONFIGURE NETWORK INTERFACE USING PLATCFG UTILITY**

S T E P #	B	This procedure configures the network interfaces and makes the E5APPB servers accessible to the network. Estimated time: 5 minutes	
1.	<input type="checkbox"/>	<b>MPS B:</b> Login as admusr.	Login: <b>admusr</b> Password: <b>&lt;admusr_password&gt;</b>
2.	<input type="checkbox"/>	<b>MPS B:</b> Login to platcfg utility	<b>\$ sudo su - platcfg</b>
3. -	<input type="checkbox"/>	<b>MPS B:</b> Select Interface Options	Go to network configuration and select network interfaces.   <p>Select edit an interface as given in below snapshot.</p>

```
l Network Interfaces Menu k
x
x Add an Interface x
x Edit an Interface x
x Delete an Interface x
x Restart an Interface x
x Exit x
x
mqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqj

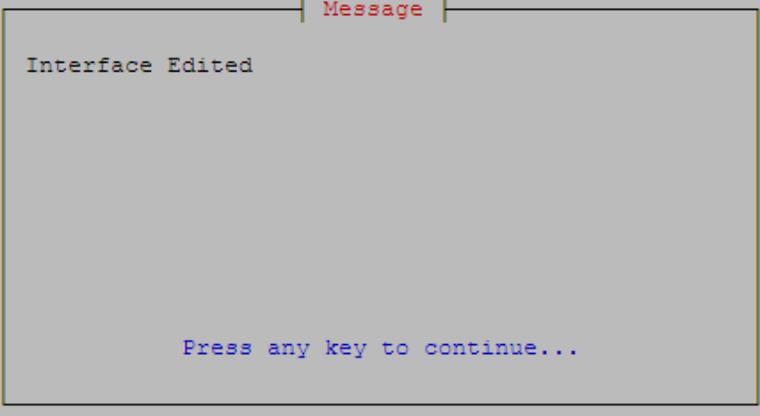
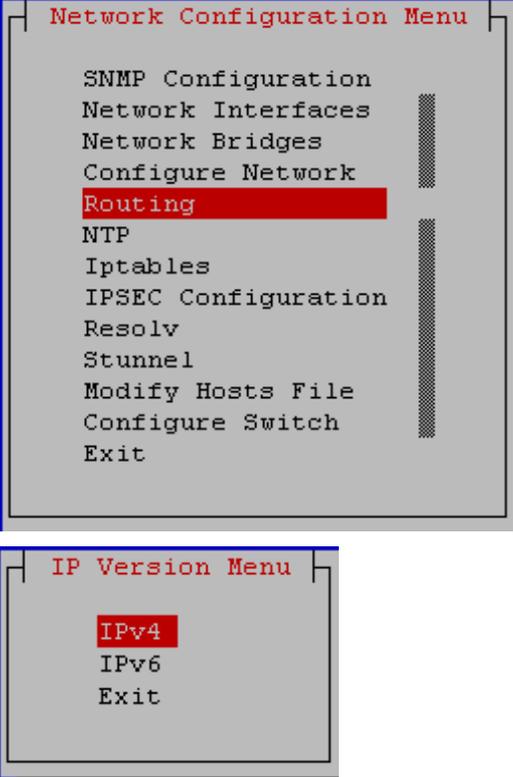
Choose the interface and follow the snapshots further as
given below:

l Connection to edit Menu k
x
x eth01 x
x eth02 x
x eth03 x
x eth04 x
x lo:1 x
x Exit x
x
mqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqj

l Interface Options qqqqqqqqqqqqqqqqqqqqqqqk
x
x MTU: _____ x
x GRO: < > on x
x < > off x
x <o> <undef> x
x GSO: < > on x
x < > off x
x <o> <undef> x
x hwaddr: _____ x
x BootProto: <o> none x
x < > dhcp x
x IPv6 Autoconf: <o> yes x
x < > no x
x
x OK Cancel x
x
mqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqj

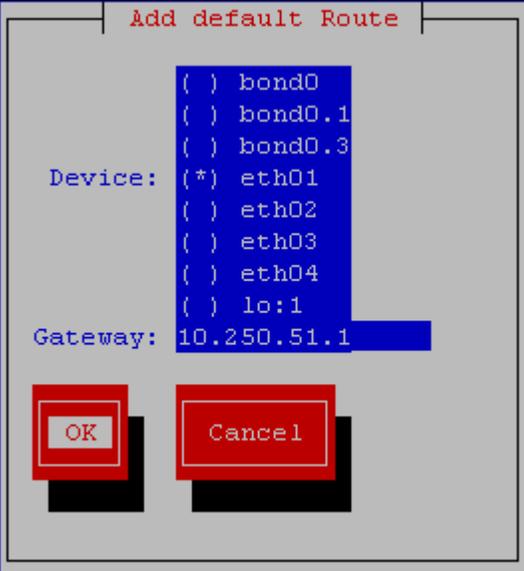
lqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqk
xWould you like to configure Ethtool Options? x
x x
x x
x x
x x
x x
mqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqj
No Yes
```



			 <p>select "Exit" until you exit from the platcfg utility.</p>
5.	<input type="checkbox"/>	<b>MPS B:</b> Configure default route.	 <pre>Network Configuration Menu SNMP Configuration Network Interfaces Network Bridges Configure Network Routing NTP Iptables IPSEC Configuration Resolv Stunnel Modify Hosts File Configure Switch Exit  IP Version Menu IPv4 IPv6 Exit</pre>

The image displays three sequential screenshots of a network configuration interface:

- IPv4 Static Routes:** A window titled "IPv4 Static Routes" showing a table of routes. The table has columns for Interface, Type, Address, Netmask, and Gateway. A single route is listed for interface eth01, type default, address default, and gateway 10.250.51.1. "Edit" and "Exit" buttons are visible in the top right.
- IPv4 Route Action Menu:** A menu titled "IPv4 Route Action Menu" with options: Add Route (highlighted), Edit Route, Delete Route, Policy Based Routing, and Exit.
- Add Route:** A dialog titled "Add Route" with a "Type:" label and three radio button options: (\*) default (selected), ( ) net, and ( ) host. "OK" and "Cancel" buttons are at the bottom.

			  <p>Select "Exit" until you exit from the platcfg utility.</p>
6.	<input type="checkbox"/>	<p><b>MPS B:</b> Note down the timestamp in log.</p>	<p>Run the following command \$ date</p>

### 3.5 Initial Configuration on E5APPB

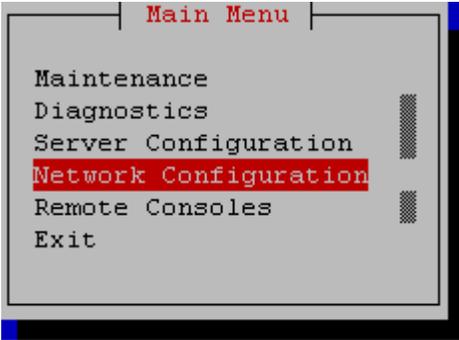
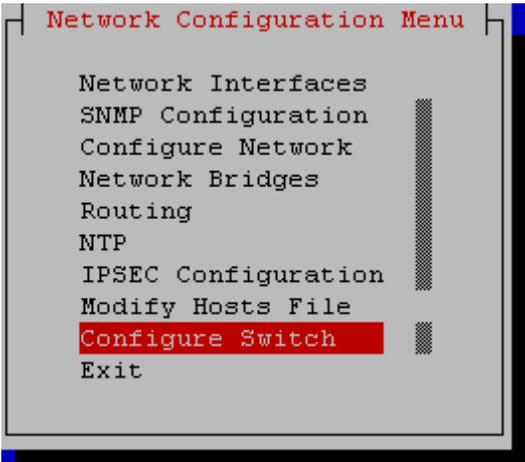
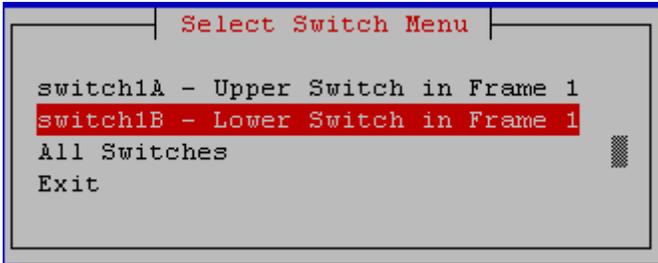
This procedure sets the ELAP initial configuration parameters and prepares the new MPS-A and MPS-B servers for network access.

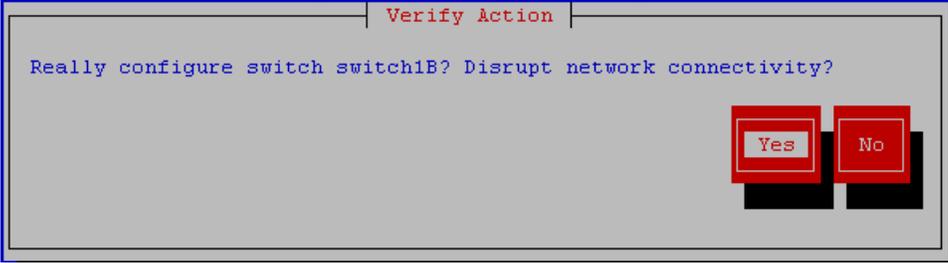
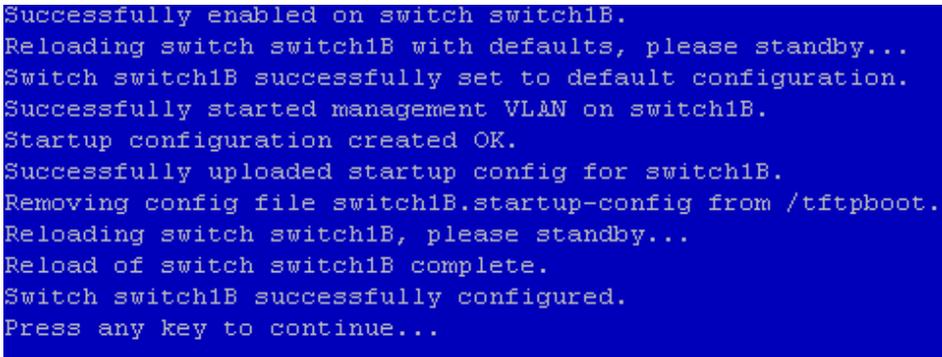
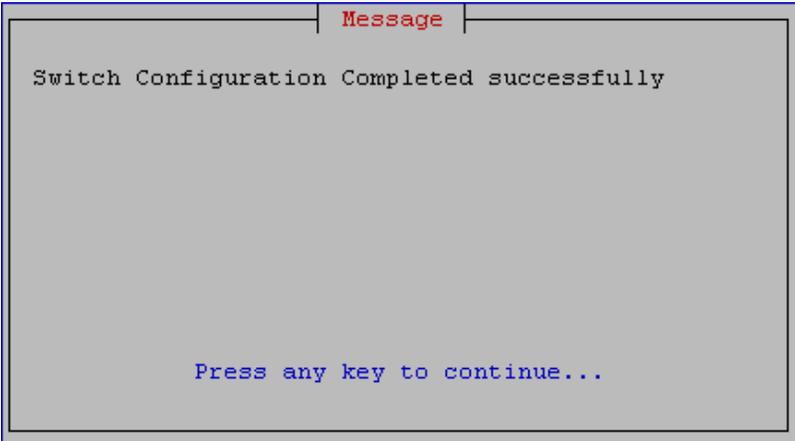
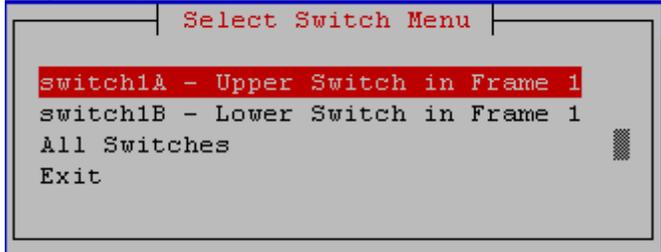
**If exiting switches are used then the provisioning should be stopped at this point to avoid data loss. The anticipated down time for provisioning is expected to last approximately 5 hours.**

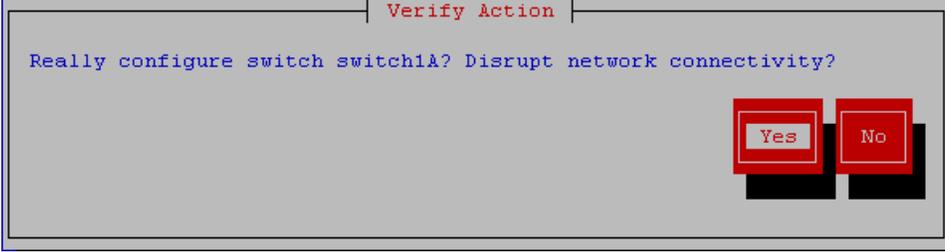
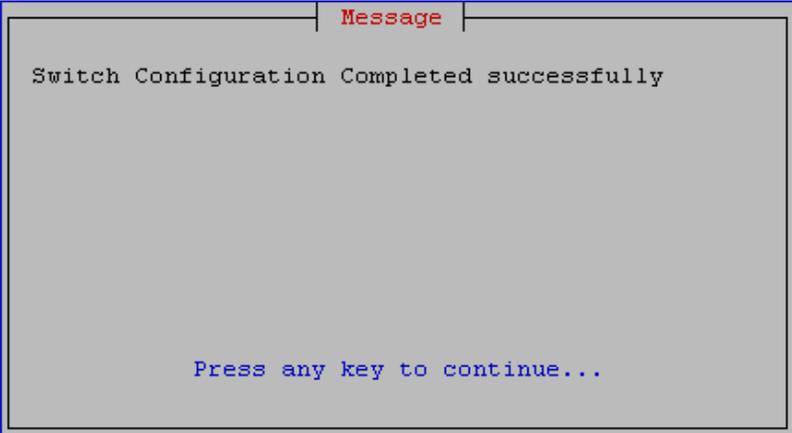
**Note:** After IPM, switch configuration should be done before initial configuration. Follow ELAP Incremental Upgrade/Installation guide for ELAP 10.2, Procedure 8 (CGBU\_046632) for switch configuration steps.

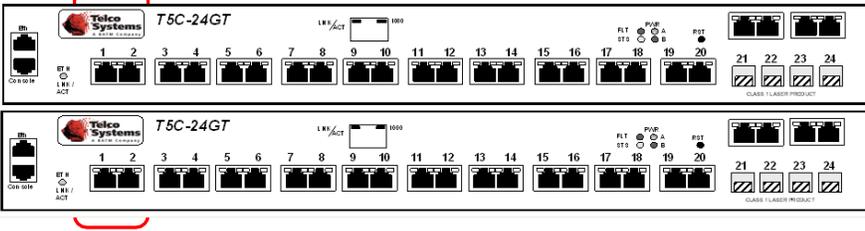
### Procedure 11 Switch Configuration

<p>S T E P #</p>	<p>This procedure Configures the Switches of a newly installed ELAP Server Pair.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>IF THIS PROCEDURE FAILS, CONTACT THE TEKELEC CUSTOMER CARE CENTER AND ASK FOR ASSISTANCE.</p>	
<p>1. <input type="checkbox"/></p>	<p>Make the cross-over cable connections.</p>	<p style="text-align: center;"><b>NOTE: THIS IS IMPORTANT</b></p> <p>CONNECT the LAG cable from Port 1 of Switch1A to Port 1 of Switch1B.</p> <p>DISCONNECT the LAG cable from Port 2 of Switch1A to Port 2 of Switch1B.</p> <div style="text-align: center;"> </div> <p>Please make a note that the switch configuration should only be attempted by a skilled technician.</p> <p>All uplinks should be removed while switch configuration.</p> <p>There should not be any loop in the switches during their configuration.</p>
<p>2. <input type="checkbox"/></p>	<p>MPS A: Console login.</p>	<p>Login using serial console.</p> <pre>consolelogin: root password: password</pre>
<p>3. <input type="checkbox"/></p>	<p>MPS A: Start services for switch configuration</p>	<p>Change the startup information for tftp:</p> <pre># chkconfig tftp on</pre> <p>Change the startup information for xinetd:</p> <pre># chkconfig xinetd on</pre> <p>Start xinetd</p> <pre># service xinetd start</pre>
<p>4. <input type="checkbox"/></p>	<p>MPS A: Verify the bond0 configuration.</p>	<p>Verify that the eth03 is the default primary port of the bond0.</p> <pre># cat /proc/net/bonding/bond0   grep "Currently Active Slave" Currently Active Slave: eth03</pre>
<p>5. <input type="checkbox"/></p>	<p>MPS A: Set the permissions for BinOS-T5CL3_24G-G_v8.6.R6.2.bin</p>	<p>Change the permissions of BinOS file to 644</p> <pre># chmod 644 /var/TKLC/switchconfig/BiNOS-T5CL3_24G-G_v8.6.R6.2.binbin</pre> <p>Verify the permission of the file</p> <pre># ls -l /var/TKLC/switchconfig total 4432</pre>

		-rw-r--r-- 1 root root 4537660 Nov 10 07:26 BinOS-T5CL3_24G-G_v8.6.R6.2.bin
6. <input type="checkbox"/>	MPS A: Start platcfg utility.	# su - platcfg
7. <input type="checkbox"/>	MPS A: Navigate to the Network Configuration Menu.	On the platcfg Main Menu, select Network Configuration and press [ENTER]. 
8. <input type="checkbox"/>	MPS A: Navigate to the Configure Switch Menu.	On the Network Configuration menu, select Configure Switch and press [ENTER]. 
9. <input type="checkbox"/>	MPS A: Select to configure "switch1B - Lower Switch in Frame 1" and press Enter.	On the select switch Menu, select "switch1B - Lower Switch in Frame 1" and press [ENTER]. 
10. <input type="checkbox"/>	MPS A: Confirm Switch Configuration.	

		<p>Select Yes and press [ENTER] to configure Switch 1B.</p> 
<p>11. <input type="checkbox"/></p>	<p>MPS A: Switch Configuration Screen.</p>	<p>Configuring the switch takes about 10 minutes, once complete press [ENTER] to continue.</p> 
<p>12. <input type="checkbox"/></p>	<p>MPS A: Switch Configuration completion screen.</p>	<p>The switch configuration completion screen is displayed. Press [ENTER] to continue.</p> 
<p>13. <input type="checkbox"/></p>	<p>MPS A: Select to configure "switch1A - Upper Switch in Frame 1" and press Enter.</p>	<p>On the Select Switch Menu, select "switch1A - Upper Switch in Frame 1" and press [ENTER].</p> 

<p>14. <input type="checkbox"/></p>	<p>MPS A: Confirm Switch Configuration.</p>	<p>Select Yes and press [ENTER] to configure Switch 1A.</p> 
<p>15. <input type="checkbox"/></p>	<p>MPS A: Switch Configuration Screen.</p>	<p>Configuring the switch takes about 10 minutes, once complete press [ENTER] to continue.</p> 
<p>16. <input type="checkbox"/></p>	<p>MPS A: Switch Configuration completion screen.</p>	<p>The switch configuration completion screen is displayed. Press [ENTER] to continue.</p> 
<p>17. <input type="checkbox"/></p>	<p>MPS A: Exit out of platcfg.</p>	<p>Select Exit and press [ENTER] to return to the Network Configuration Menu. Select Exit and press [ENTER] to return to the Main Menu. Select Exit and press [ENTER] to exit out of platcfg.</p>
<p>18. <input type="checkbox"/></p>	<p>MPS A: Connect the cross-over cable from</p>	<p>Make sure that the LAG cable is connected from Port 1 of Switch1A to Port 1 of Switch1B.  CONNECT the LAG cable from Port 2 of Switch1A to Port 2 of</p>

	<p>Port 2 of Switch1A to Port 2 of Switch1B at this time.</p>	<p>Switch1B.</p> 
<p>19. <input type="checkbox"/></p>	<p>MPS A: Stop services after switch configuration.</p>	<p>Change the startup information for tftp:  <code># chkconfig tftp off</code></p> <p>Change the startup information for xinetd:  <code># chkconfig xinetd off</code></p> <p>Stop xinetd  <code># service xinetd stop</code></p>
<p>20. <input type="checkbox"/></p>	<p>Procedure complete.</p>	<p>This procedure is complete.</p>

**Procedure 12 CONFIGURE CHRONY SERVERS**

<p>S T E P #</p>	<p>This procedure configures the NTP server setting for both servers.</p> <p><b>Note: Estimated time of completion is 5 minutes.</b></p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>Should this procedure fail, Contact Oracle technical services and ask for <b>FULL UPGRADE ASSISTANCE</b>.</p>	
<p>1. <input type="checkbox"/></p>	<p><b>MPS A:</b> Switch user to elapconfig.</p>	<p><code># su - elapconfig</code></p>
<p>2. <input type="checkbox"/></p>	<p><b>MPS A:</b> Press Return to continue.</p>	<p>Caution: This is the first login of the text user interface. Please review the following checklist before continuing. Failure to enter complete and accurate information at this time will have unpredictable results.</p> <ol style="list-style-type: none"> <li>1. The mate MPS servers (MPS A and MPS B) must be powered on.</li> <li>2. "Initial Platform Manufacture" for the mate MPS servers must be complete.</li> <li>3. The sync network between the mate MPS servers must be operational.</li> <li>4. You must have the correct password for the elapdev user on the mate MPS server.</li> </ol> <p>Press return to continue...</p>

<p>3. <input type="checkbox"/></p>	<p><b>MPS A:</b> Enter elapdev and root password when prompted.</p>	<pre> Password of elapdev: Could not get authorized keys file from remote (mate). Maybe it does not exist. Continuing... ssh is working correctly. Password of root: Could not get authorized keys file from remote (mate). Maybe it does not exist. Continuing... ssh is working correctly. Password of admusr: Could not get authorized keys file from remote (mate). Maybe it does not exist. Continuing... ssh is working correctly. Password of root: ssh is working correctly. Performing DRBD configuration. Creating the DB Data directory. Moving DB files to the DRBD Volume. Changing ownership to mysql. Updating my.cnf. Restarting mysqld. Building the initial database on side A. Checking if EuiDB database exists: No preexisting EuiDB database was detected. Creating EuiDB database. Creating Alarms database. Creating Ulog database. Creating EuiDB, Alarms and Ulog tables. FIPS integrity verification test failed. FIPS integrity verification test failed. /bin/chmod: cannot access `/var/TKLC/elap/drbd/mysql/data/EuiDB': No such file or directory                     </pre>
<p>4. <input type="checkbox"/></p>	<p><b>MPS A:</b> Select choice 7, Configure NTP Server Menu.</p>	<pre> /-----ELAP Configuration Menu-----\  1   Display Configuration  2   Configure Network Interfaces Menu  3   Set Time Zone  4   Exchange Secure Shell Keys  5   Change Password  6   Platform Menu  7   Configure NTP Server  8   Mate Disaster Recovery  e   Exit \-----\  Enter Choice: 7                     </pre>
<p>5. <input type="checkbox"/></p>	<p><b>MPS A:</b> The Configure NTP Server Menu is displayed. Select choice 2, Add External NTP Server.</p>	<pre> /-----ELAP Configure NTP Server Menu-\  1   Display External NTP Server  2   Add External NTP Server  3   Remove External NTP Server  e   Exit \-----\                     </pre>

		<pre> Enter Choice: 2  Are you sure you wish to add new NTP Server? [N]: Y Enter the ELAP NTP Server IP Address: &lt;NTP_server_IP_Addr&gt;  External NTP Server [&lt;NTP_server_IP_Addr&gt;] has been added.  Press return to continue...         </pre>
<p>6. <input type="checkbox"/></p>	<p><b>MPS A:</b> The ELAP Configure NTP Server Menu is displayed. Enter choice 1, Display External NTP Server.</p>	<pre> /-----ELAP Configure NTP Server Menu-\ /-----\   1   Display External NTP Server    --- -----    2   Add External NTP Server      --- -----    3   Remove External NTP Server   --- -----    e   Exit                         \-----/  Enter Choice: 1  chronyserver1      &lt;NTP_server_IP_Addr&gt;  Press return to continue...         </pre>
<p>7. <input type="checkbox"/></p>	<p><b>MPS A:</b> The ELAP Configure NTP Server Menu is displayed. Select choice, Exit. Otherwise, if more Chrony servers are to be added, then repeat steps 1 to 6.</p>	<pre> /-----ELAP Configure NTP Server Menu-\ /-----\   1   Display External NTP Server    --- -----    2   Add External NTP Server      --- -----    3   Remove External NTP Server   --- -----    e   Exit                         \-----/  Enter Choice: e         </pre>
<p>8. <input type="checkbox"/></p>	<p><b>MPS A:</b> Run the following command.</p> <p><b>Note:</b> The “chronyc ntpdata” command will work after the servers have been assigned with an IP. Hence, the step 8 and 9 will work only after the network configuration is done.</p>	<pre> # chronyc ntpdata  Remote address   : 10.75.124.27 (0A4B7C1B) Remote port      : 123 Local address    : 10.75.141.11 (0A4B8D0B) Leap status      : Normal Version          : 4 Mode             : Server Stratum          : 4 Poll interval    : 10 (1024 seconds) Precision        : -19 (0.000001907 seconds) Root delay       : 0.045807 seconds Root dispersion  : 0.016266 seconds Reference ID     : 0A4B7CF6 () Reference time   : Tue Jan 02 10:39:12 2024         </pre>

		<pre> Offset      : -0.000049386 seconds Peer delay   : 0.000802394 seconds Peer dispersion : 0.000001940 seconds Response time : 0.000062915 seconds Jitter asymmetry: -0.50 NTP tests    : 111 111 1111 Interleaved  : No Authenticated : No TX timestamping : Kernel RX timestamping : Kernel Total TX     : 4193 Total RX     : 4193 Total valid RX  : 4193                 </pre> <p>Make sure that delay and offset is zero. If delay and offset is not zero, follow step 9 Otherwise skip step 9.</p>
9.	<input type="checkbox"/> <b>MPS A:</b> Run the following command.	<pre> # systemctl stop chronyd # chronyc makestep # systemctl start chronyd                 </pre>
10.	<input type="checkbox"/> <b>MPS A:</b> Note down the timestamp in log.	<pre> Run the following command \$ date                 </pre>

**This procedure is complete!**

**Procedure 13 INITIAL NETWORK CONFIGURATION**

S T E P #	<p>This procedure configures the network interfaces and makes the E5APPB servers accessible to the network.</p> <p><b>Note: Estimated time of completion is 10 minutes.</b></p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>Should this procedure fail, Contact Oracle technical services and ask for <b>FULL UPGRADE ASSISTANCE</b>.</p>	
1.	<input type="checkbox"/> <b>MPS A:</b> Login to serial console as root.	<pre> login: root Password: &lt;root_password&gt;                 </pre>
2.	<input type="checkbox"/> <b>MPS A:</b> Switch user to elapconfig.	<pre> # su - elapconfig                 </pre>
3.	<input type="checkbox"/> <b>MPS A:</b> The ELAP Configuration Menu is displayed. Select	<pre> /-----ELAP Configuration Menu-----\   1   Display Configuration                 ----- -----                  </pre>

	<p>choice 2, Configure Network Interfaces Menu.</p>	<pre> 2   Configure Network Interfaces Menu ----- ----- 3   Set Time Zone ----- ----- 4   Exchange Secure Shell Keys ----- ----- 5   Change Password ----- ----- 6   Platform Menu ----- ----- 7   Configure NTP Server ----- ----- 8   Mate Disaster Recovery ----- ----- e   Exit \----- -----/  Enter Choice: 2         </pre>
<p>4. <input type="checkbox"/></p>	<p><b>MPS A:</b> Configure Network Interfaces Menu is displayed. Select choice 1, Configure Provisioning Network Menu.</p>	<pre> /-----Configure Network Interfaces Menu-----\ /----- -----\   1   Configure Provisioning Network  ----- -----    2   Configure DSM Network  ----- -----    3   Configure Forwarded Ports  ----- -----    4   Configure Static NAT Addresses  ----- -----    e   Exit \----- -----/  Enter Choice: 1         </pre>
<p>5. <input type="checkbox"/></p>	<p><b>MPS A:</b> Enter the IP addresses, subnet mask, default gateway and Virtual IP.</p>	<pre> Verifying connectivity with mate... ELAP A provisioning network IP Address [192.168.61.104]: ELAP B provisioning network IP Address [192.168.61.105]: ELAP provisioning network netmask [255.255.255.0]: ELAP provisioning network default router: ELAP local provisioning virtual IP Address [192.168.61.100]:  Please wait, this may take a while...  <b>Note:</b> Below drbd messages might be observed while configuring provisioning network. They are expected so we can ignore them.  [12989.770127] drbd drbd0: State change failed: Can not disconnect a StandAlone device         </pre>
<p>6. <input type="checkbox"/></p>	<p><b>MPS A:</b> Select option e to exit.</p>	<pre> /-----Configure Network Interfaces Menu-----\ /----- -----\   1   Configure Provisioning Network  ----- -----    2   Configure Sync Network  ----- -----    3   Configure DSM Network  ----- -----    4   Configure Backup Provisioning Network  ----- -----          </pre>

		<pre>  -----    5   Configure Forwarded Ports    -----    6   Configure Static NAT Addresses    -----    7   Configure Provisioning VIP Addresses    -----    e   Exit   \-----/  EnterChoice:e         </pre>
<p>7. <input type="checkbox"/></p>	<p><b>MPS A:</b> Select option e to completely exit the menu.</p>	<pre> /-----ELAP Configuration Menu-----\ /-----\   1   Display Configuration    -----    2   Configure Network Interfaces Menu    -----    3   Set Time Zone    -----    4   Exchange Secure Shell keys    -----    5   Change Password    -----    6   Platform Menu    -----    7   Configure NTP Server    -----    8   Mate Disaster Recovery    -----    e   Exit   \-----/  Enter Choice: e  *Note if this menu is not exited properly root will not be disabled         </pre>
<p>8. <input type="checkbox"/></p>	<p><b>MPS A:</b> Note down the timestamp in log.</p>	<p>Run the following command</p> <pre>\$ date</pre>
<p>9. <input type="checkbox"/></p>	<p><b>MPS A:</b> Check that drbd syncing is complete. If not, then wait for drbd to sync</p> <p><b>Note:</b> If DRBD is still syncing, run DRBD status command periodically to check until both ELAPs get synced.</p>	<p>Run the following command to display DRBD status.</p> <pre># drbdadm status all</pre> <p><b>Expected status:</b>  <b>Role:</b> Primary/Secondary  <b>Disk:</b> UpToDate/UpToDate</p> <p>Example:</p> <pre>\$ drbdadm status all drbd0 role:Primary       disk:UpToDate       Devloan04 role:Secondary             peer-disk:UpToDate</pre> <p>If drbd is still syncing, you will see some output in percentage which shows that drbd is getting synced. wait for</p>

		<pre> it to sync completely till 100% and come as Primary/UpToDate and Secondary/UpToDate. # drbdadm status all drbd0 role:Primary     disk:UpToDate     Devloan04 role:Secondary         replication:SyncSource peer-disk:Inconsistent <b>done: 66.44</b> </pre>
<p>10. <input type="checkbox"/></p>	<p><b>MPS A and MPS B:</b> Check the hastatus on both the nodes.</p>	<pre> Check the hastatus on both the nodes. MPS A should be ACTIVE  # hastatus ACTIVE MPS B should be STANDBY. # hastatus STANDBY  If hastatus for MPS B shows as "UNINITIALIZED "INHIBITED"", then run the below command to make it STANDBY. # /usr/TKLC/plat/sbin/hafailover --noinhibit  Example: [root@Crete-B ~]# /usr/TKLC/plat/sbin/hafailover -- noinhibit [root@Crete-B ~]# hastatus UNINITIALIZED [root@Crete-B ~]# hastatus STANDBY [root@Crete-B ~]# </pre>
<p>11.</p>	<p><b>MPS A:</b> Run the following command.</p>	<pre> # chronyc ntpdata  Remote address   : 10.75.124.27 (0A4B7C1B) Remote port      : 123 Local address    : 10.75.141.11 (0A4B8D0B) Leap status      : Normal Version          : 4 Mode             : Server Stratum          : 4 Poll interval    : 10 (1024 seconds) Precision        : -19 (0.000001907 seconds) Root delay       : 0.045807 seconds Root dispersion  : 0.016266 seconds Reference ID     : 0A4B7CF6 () </pre>

		<pre>Reference time : Tue Jan 02 10:39:12 2024 Offset        : -0.000049386 seconds Peer delay    : 0.000802394 seconds Peer dispersion : 0.000001940 seconds Response time : 0.000062915 seconds Jitter asymmetry: -0.50 NTP tests     : 111 111 1111 Interleaved   : No Authenticated : No TX timestamping : Kernel RX timestamping : Kernel Total TX      : 4193 Total RX      : 4193 Total valid RX : 4193</pre> <p>Make sure that delay and offset is zero. If delay and offset is not zero, run the below commands else skip the below commands.</p> <pre># systemctl stop chronyd # chronyc makestep # systemctl start chronyd</pre> <p>Run the below command to note the current timestamp on the server:</p> <pre># date</pre>
<p>12. <input type="checkbox"/></p>	<p><b>MPS A and MPS B:</b> Reboot both MPS A and MPS B servers once after drbd is synced.</p>	<p>Reboot both MPS A and MPS B servers using below command.</p> <pre># reboot</pre>
<p>13. <input type="checkbox"/></p>	<p><b>MPS A and MPS B:</b> If any core files were formed during the upgrade MTC window, delete them.</p>	<p>Delete the core files that were formed during the upgrade maintenance window using below command. These core files are one time.</p> <pre># rm /var/TKLC/core/&lt;core file name&gt;</pre> <p>For example:</p> <pre># rm /var/TKLC/core/core.gs.10084*</pre> <pre>rm: remove regular file '/var/TKLC/core/core.gs.10084'? Y rm: remove regular file '/var/TKLC/core/core.gs.10084.bt'? Y</pre>

**This procedure is complete!**

**Procedure 14 VERIFY CONFIGURATIONS**

S T E P #	<p>This procedure verifies the E5APPB configurations.</p> <p><b>Note: Estimated time of completion is 5 minutes.</b></p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>Should this procedure fail, Contact Oracle technical services and ask for <b>FULL UPGRADE ASSISTANCE</b>.</p>	
1. <input type="checkbox"/>	<p><b>MPS A:</b></p> <p>Login to serial console as root.</p>	<pre>login: root Password: &lt;root_password&gt;</pre>
2. <input type="checkbox"/>	<p><b>MPS A:</b></p> <p>Switch user to elapconfig.</p>	<pre># su - elapconfig</pre>
3. <input type="checkbox"/>	<p><b>MPS A:</b></p> <p>Enter option 1 to display the current configuration.</p>	<pre> /-----ELAP Configuration Menu-----\ /-----\    1    Display Configuration                 -----     2    Configure Network Interfaces Menu       -----     3    Set Time Zone                           -----     4    Exchange Secure Shell Keys              -----     5    Change Password                         -----     6    Platform Menu                          -----     7    Configure NTP Server                    -----     8    Mate Disaster Recovery                  -----     e    Exit                                   \-----/  Enter Choice: 1</pre>
4. <input type="checkbox"/>	<p><b>MPS A:</b></p> <p>Verify the configuration data with the data recorded earlier</p> <p>Press Return to continue.</p>	

		<pre> ELAP A Provisioning Network IP Address = 192.168.59.9 -LAP B Provisioning Network IP Address = 192.168.59.10 Provisioning Network Netmask          = 255.255.255.0 Provisioning Network Default Router    = 192.168.59.250 Provisioning VIP                        = 192.168.59.22 ELAP A Sync Network Address            = 169.254.1.100 ELAP B Sync Network Address            = 169.254.1.200 ELAP A Main DSM Network Address        = 192.168.120.100 ELAP B Main DSM Network Address        = 192.168.120.200 ELAP A Backup DSM Network Address      = 192.168.121.100 ELAP B Backup DSM Network Address      = 192.168.121.200 ELAP A HTTP Port                       = 80 ELAP B HTTP Port                       = 80 ELAP A HTTPS Port                      = 443 ELAP B HTTPS Port                      = 443 ELAP A Banner Connection Port          = 8473 ELAP B Banner Connection Port          = 8473 ELAP A Static NAT Address               = Not configured ELAP B Static NAT Address               = Not configured ELAP A LSMS Connection Port            = 7483 ELAP B LSMS Connection Port            = 7483 ELAP A EBDA Connection Port            = 1030 ELAP B EBDA Connection Port            = 1030 Time Zone                              = America/New_York  Press return to continue... ..&lt;return&gt;         </pre>
<p>5. <input type="checkbox"/> <b>MPS A:</b> Enter option e to Exit.</p>		<pre> /-----ELAP Configuration Menu-----\ /-----\    1   Display Configuration                 -----     2   Configure Network Interfaces Menu    -----     3   Set Time Zone                         -----     4   Exchange Secure Shell Keys           -----     5   Change Password                      -----     6   Platform Menu                        -----     7   Configure NTP Server                 -----     8   Mate Disaster Recovery               -----     e   Exit                                \-----/  Enter Choice: e  *Note if this menu is not exited properly root access via ssh will not be disabled         </pre>

### 3.6 Data Migration

This section lists the procedures, in order, that must be performed to bring the E5APPB ELAP into service.

#### Procedure 15 TRANSFER DATABASES TO MATE

Note: If the backups are transferred to a remote server then it is recommended that the remote server has at least 100Mbps network bandwidth and 100G disk space.

STEP #	A	B	<p>This procedure transfers the database backup from the one ELAP to the E5APPB ELAP or remote server.</p> <p>Estimated time: 30-60 minutes</p>	
1.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Login as elapdev.</p>	<p>login: <b>elapdev</b> Password: <b>&lt;epapdev_password&gt;</b></p>
2.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Verify Connectivity with the E5APPB card. If the E5APPB card cannot be pinged, verify the network connectivity.</p>	<pre>\$ ping &lt;E5APPB IP&gt; -c 3 PING 192.168.3.2 (192.168.3.2) 56(84) bytes of data. 64 bytes from mate (192.168.3.2): icmp_seq=0 ttl=64 time=0.118 ms 64 bytes from mate (192.168.3.2): icmp_seq=1 ttl=64 time=0.102 ms 64 bytes from mate (192.168.3.2): icmp_seq=2 ttl=64 time=0.120 ms  --- mate ping statistics --- 3 packets transmitted, 3 received, 0% packet loss, time 2001ms rtt min/avg/max/mdev = 0.102/0.113/0.120/0.011 ms, pipe 2</pre>
3.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Change directory to the /var/TKLC/elap/free directory</p>	<pre>\$ cd /var/TKLC/elap/free</pre>
4.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> List the EuiDB Backup File in this directory.</p> <p><b>NOTE: There will be two npdbBackup listed here.</b></p>	<pre>#ls -l npdbBackup* npdbBackup_XXXXX-a_XXXXXXXXX.sql.gz npdbBackup_YYYYY-a_YYYYYYYYY.sql.gz  Please update the ownership of files to elapdev:elap by below command before transferring. Backup is taken from root user, it will be having ownership as root:root.  # su - Password: &lt;root password&gt; # cd /var/TKLC/elap/free #chown elapdev:elap npdbBackup_XXXXX-a_XXXXXXXXX.sql.gz #chown elapdev:elap npdbBackup_YYYYY-a_YYYYYYYYY.sql.gz #su - elapdev # cd /var/TKLC/elap/free</pre>
5.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Copy the EuiDB Backup File to the remote server.</p> <p><b>NOTE: This backup will be used in case the full upgrade is not successful.</b></p>	<pre>\$ scp -p npdbBackup_XXXXX-a_XXXXXXXXX.sql.gz elapdev@&lt;E5APPB X IP&gt;:/var/TKLC/elap/free  Or  \$ sftp elapdev@&lt;E5APPB X IP&gt; Connecting to &lt;E5APPB A IP&gt;... The authenticity of host '&lt;E5APPB A IP&gt;' can't be established. DSA key fingerprint is 58:a5:7e:1b:ca:fd:1d:fa:99:f2:01:16:79:d8:b4:24.</pre>

			<p>Are you sure you want to continue connecting (yes/no)? yes  Warning: Permanently added '&lt;E5APPB A IP&gt;' (DSA) to the list of known hosts.  elapdev&lt;E5APPB A IP&gt;'s password:  sftp&gt; cd /var/TKLC/elap/free  sftp&gt; p't <i>npdbBackup_ 'xxxx' a_XXXXXXXXX.sql.gz</i>  Uploading <i>npdbBackup_XXXXX-a_XXXXXXXXX.sql.gz</i> to <i>npdbBackup_XXXXX-a_XXXXXXXXX.tar</i>  sftp&gt; bye</p>
6.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b>  Copy the EuiDB'mysqldump Bac'up File to the remote server.  <b>NO'E: This mysqldump of EuiDB will be used for restoring EuiDB after the full upgrade is successful.</b></p> <p><b>\$ scp -p npdbBackup_yyyy-a_yyyyyyyy.sql.gz elapdev@&lt;E5APPB A IP&gt;:/var/TKLC/elap/free</b></p> <p><b>Or</b></p> <p><b>\$ sftp elapdev@&lt;E5APPB A IP&gt;</b>  Connecting to &lt;E5APPB A IP&gt;...  The authenticity of host '&lt;E5APPB A IP&gt;' can't be established.  DSA key fingerprint is  58:a5:7e:1b:ca:fd:1d:fa:99:f2:01:16:79:d8:b4:24.  Are you sure you want to continue connecting (yes/no)? yes  Warning: Permanently added '&lt;E5APPB A IP&gt;' (DSA) to the list of known hosts.  elapdev&lt;E5APPB A IP&gt;'s password:  sftp&gt; cd /var/TKLC/elap/free  sftp&gt; p't <i>npdbBackup_ 'yyy-' _yyyyyyy.sql.gz</i>  Uploading <i>npdbBackup_yyyy-a_yyyyyyyy.sql.gz</i> to <i>npdbBackup_yyyy-a_yyyyyyyy.sql.gz</i>  sftp&gt; bye</p>
7.	<input type="checkbox"/>		<p><b>MPS X:</b> Note down the timestamp in log.</p> <p>Run the following command  <b>\$ date</b></p>

**This procedure is complete!**

### Procedure 16 RESTORE EUIDB

Now that the Databases have been copied over, it's time to restore the Databases and start the ELAP application.

**Note: HA status of ELAP servers should be Active and Standby . If HA status is not Active/Standby, contact the My Oracle Support by following the instructions in [Appendix E](#).**

<b>S</b>	This procedure migrates the EuiDB database to the E5APPB.
<b>T</b>	<b>Note: Estimated time of completion is 15 minutes.</b>
<b>E</b>	Check off (√) each step as it is completed. Boxes have been provided for this purpose under each step number.
<b>P</b>	Should this procedure fail, Contact Oracle technical services and ask for <b>FULL UPGRADE ASSISTANCE</b> .
<b>#</b>	

1. <input type="checkbox"/>	<b>Active ELAP:</b> Login as elapdev.	Login: elapdev Password: <elapdev_password>
2. <input type="checkbox"/>	<b>Active ELAP:</b> Verify that the DB Backup file has been transferred over and its permissions are correct.	<pre>\$ cd /var/TKLC/elap/free</pre> <pre>[elapdev@Natal-A free]\$ ls -ltr /var/TKLC/elap/free/</pre> <pre>-rw-r----- 1 elapdev elap 5195 Jan 25 05:36 npdbBackup_Natal-A_20210125053550.sql.gz</pre> <p><b>NOTE: The ownership of file should be elapdev:elap. Please check and provide correct ownership of elapdev:elap, if not correct.</b></p>
3. <input type="checkbox"/>	<b>Active ELAP:</b> Restore Output is displayed.	<pre>\$/usr/TKLC/elap/bin/Euidb_migration.pl &lt;backup name&gt;</pre> <p><b>Example: \$ /usr/TKLC/elap/bin/Euidb_migration.pl npdbBackup_Natal-A_20210125053550.sql.gz</b></p> <p>Logs will be directed to /usr/TKLC/appl/logs/Euidb_migration.log for more details. INFO: This script is used to restore older 10.1 release EuiDB backup to current release. Please note that MySQL should be running for this process.</p> <p>Are you sure this EuiDB backup is from ELAP 10.1 release? (y/n) y Restoring up the NPDB... INFO: Backup restored successfully. Success.</p> <p>For more details, see "/usr/TKLC/elap/logs/Euidb_migration.log".</p> <pre>\$uiEdit LNP_TN_QTY</pre> <pre>Output: "LNP_TN_QTY" is set to "504000000"</pre> <p><b>If LNP_TN_QTY is set to any value other than 756000000, set the proper value.</b></p> <pre>\$uiEdit LNP_TN_QTY 756000000</pre> <pre>Output: "LNP_TN_QTY" is set to "756000000"</pre> <p><b>Check value of LNP_TN_QTY</b></p> <pre>\$uiEdit LNP_TN_QTY</pre> <pre>Output: "LNP_TN_QTY" is set to "756000000"</pre>
4. <input type="checkbox"/>	<b>Active ELAP:</b> Reset IP Addresses. Login to elapconfig	<p>Re-Set the IP addresses using elapconfig. (for Prov and NTP if used).</p> <pre>\$ sudo su - elapconfig</pre>

<p>5. <input type="checkbox"/></p>	<p><b>Active ELAP:</b> The ELAP Configuration Menu is displayed. Select option 2 to enter the Network Interfaces Menu.</p>	<pre> /-----ELAP Configuration Menu-----\ /-----\   1   Display Configuration    -----    2   Configure Network Interfaces Menu    -----    3   Set Time Zone    -----    4   Exchange Secure Shell Keys    -----    5   Change Password    -----    6   Platform Menu    -----    7   Configure NTP Server    -----    8   Mate Disaster Recovery    -----    e   Exit   \-----/ Enter choice: 2         </pre>
<p>6. <input type="checkbox"/></p>	<p><b>Active ELAP:</b> The Configure Network Interfaces Menu is displayed.</p> <p>Select option 1 to configure the provisioning network.</p>	<pre> /-----Configure Network Interfaces Menu- \ /-----\   1   Configure Provisioning Network    -----    2   Configure DSM Network    -----    3   Configure Forwarded Ports    -----    4   Configure Static NAT Addresses    -----    e   Exit   \-----/ Enter choice: 1         </pre>
<p>7. <input type="checkbox"/></p>	<p><b>Active ELAP:</b> Enter the IP addresses, subnet mask, default gateway and Virtual IP address, subnet mask, default gateway and Virtual IP tering them again by just pressing enter key).</p>	<pre> Verifying connectivity with mate... ELAP A provisioning network IP Address [192.168.61.104]: <b>192.168.61.136</b> ELAP B provisioning network IP Address [192.168.61.105]: <b>192.168.61.137</b> ELAP provisioning network netmask [255.255.255.0]: <b>255.255.255.0</b> ELAP provisioning network default router: <b>192.168.61.250</b> ELAP local provisioning Virtual IP Address [192.168.61.100]: <b>192.168.61.166</b>  Please wait, this may take a while...  <b>Note:</b> Below drbd messages might be observed while configuring provisioning network. They are expected so we can ignore them.         </pre>

		[12989.770127] drbd drbd0: State change failed: Can not disconnect a StandAlone device
8. <input type="checkbox"/>	<b>Active ELAP:</b> Select option e to exit.	<pre> /-----Configure Network Interfaces Menu-----\ /-----\   1   Configure Provisioning Network    -----    2   Configure Sync Network    -----    3   Configure DSM Network    -----    4   Configure Backup Provisioning Network    -----    5   Configure Forwarded Ports    -----    6   Configure Static NAT Addresses    -----    7   Configure Provisioning VIP Addresses    -----    e   Exit   \-----/  Enter Choice: e </pre>
9. <input type="checkbox"/>	<b>Active ELAP:</b> If configured, change “Pretty Name” to change the name on the ELAP GUI.	<pre> \$ uiEdi set to "ELAP_A_NAME" "ELAP_B_PRETTY_NAME" is set TTY_NAME Santos-B # uiEdit ELAP_A_PRETTY_NAME Santos-A  \$ uiEdit   grep -i PRETTY_NAME "ELAP_A_PRETTY_NAME" is set to "Santos-A" "ELAP_B_PRETTY_NAME" is set to "Santos-B" </pre>
10. <input type="checkbox"/>	<b>Active ELAP:</b> Switch user to elapconfig and verify the configurations.	Verify the configurations using the uiEdit command..
11. <input type="checkbox"/>	<b>Active ELAP:</b> Note down the timestamp in log.	Run the following command \$ date

**This procedure is complete!**

**Procedure 17 SSH KEY EXCHANGE BETWEEN THE ELAP AND LSMS**

<b>S</b>	This procedure exchanges SSH keys between the ELAP and LSMS.
----------	--

<p><b>T</b> » <b>P</b> <b>#</b></p>	<p><b>Note: Estimated time of completion is 15 minutes.</b> Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number. Should this procedure fail, Contact Oracle technical services and ask for <b>FULL UPGRADE ASSISTANCE</b>.</p>	
<p>1. <input type="checkbox"/></p>	<p><b>Active ELAP:</b> Login as root.</p>	<pre>login: root Password: &lt;root_password&gt;</pre>
<p>2. <input type="checkbox"/></p>	<p><b>Active ELAP:</b> Switch user to elapconfig.</p>	<pre># su - elapconfig</pre>
<p>3. <input type="checkbox"/></p>	<p><b>Active ELAP:</b> The ELAP Configuration Menu is displayed.  Select option 4 to Exchange Secure Shell Keys.</p>	<pre>/-----ELAP Configuration Menu-----\ /-----\   1   Display Configuration    ----- -----    2   Configure Network Interfaces Menu    ----- -----    3   Set Time Zone    ----- -----    4   Exchange Secure Shell Keys    ----- -----    5   Change Password    ----- -----    6   Platform Menu    ----- -----    7   Configure NTP Server    ----- -----    8   Mate Disaster Recovery    ----- -----    e   Exit   \-----/  Enter Choice: 4</pre>
<p>4. <input type="checkbox"/></p>	<p><b>Active ELAP:</b> The Exchange Secure Shell Keys Menu is displayed.  Select option 4 to Exchange Keys with LSMS.</p>	<pre>/-----Exchange Secure Shell Keys Menu-----\ /-----\   1   Exchange Keys with Mate    ----- -----    2   Exchange Keys with Remote    ----- -----    3   Exchange Keys with Mate as Root User    ----- -----    4   Exchange Keys with LSMS    ----- -----    e   Exit   \-----/  Enter Choice:4</pre>
<p>5. <input type="checkbox"/></p>	<p><b>Active ELAP:</b> Exchange SSH keys with the <b>LSMS A (host lsmspri)</b> server.</p>	<p><b>Note:</b> SSH keys will first be exchanged between the MPS A and <b>LSMS A</b> servers. The user will be prompted for the password again and SSH keys will be exchanged between the MPS B and <b>LSMS A</b> servers.</p>

	<p>Enter “Y” and press Enter.</p> <p>Enter the <b>LSMS A (host lsmspri)</b> IP address and press Enter.</p> <p>Enter the LSMS “lsmsadm” user password and press Enter.</p> <p>Verify that keys were exchanged successfully for MPS A and <b>LSMS A</b>.</p> <p>Enter the LSMS “lsmsadm” user password and press Enter.</p> <p>Verify that keys were exchanged successfully for MPS B and <b>LSMS A</b>.</p>	<p>Are you sure you wish to exchange keys with LSMS? [N]:Y</p> <p>LSMS IP Address: &lt;LSMS A IP&gt;</p> <p>The server does not know of &lt;LSMS A IP&gt;. Will just exchange host keys for the name given! Password of lsmsadm:*****</p> <p>Could not get authorized keys file from remote (&lt;LSMS A IP&gt;). Maybe it does not exist. Continuing... The server does not know of &lt;LSMS A IP&gt;. Will just exchange host keys for the name given! <b>ssh is working correctly.</b></p> <p>The server does not know of &lt;LSMS A IP&gt;. Will just exchange host keys for the name given! Password of lsmsadm: *****</p> <p>The server does not know of 192.168.60.70. Will just exchange host keys for the name given! <b>ssh is working correctly.</b></p>
<p>6. <input type="checkbox"/></p>	<p><b>Active ELAP:</b> The Exchange Secure Shell Keys Menu is displayed.</p> <p>Select option 4 to Exchange Keys with LSMS.</p>	<pre> /-----Exchange Secure Shell Keys Menu-----\ /-----\   1   Exchange Keys with Mate    -----    2   Exchange Keys with Remote    -----    3   Exchange Keys with Mate as Root User    -----    4   Exchange Keys with LSMS    -----    e   Exit   \-----/ </pre> <p>Enter Choice: 4</p>
<p>7. <input type="checkbox"/></p>	<p><b>Active ELAP:</b> Exchange SSH keys with the <b>LSMS B (host lsmssec)</b> server.</p>	<p><b>Note:</b> SSH keys will first be exchanged between the MPS A and <b>LSMS B</b> servers. The user will be prompted for the password again and SSH keys will be exchanged between the MPS B and <b>LSMS B</b> servers.</p>

	<p>Enter “Y” and press Enter.</p> <p>Enter the <b>LSMS B (host lsmsec)</b> IP address and press Enter.</p> <p>Enter the LSMS “lsmadm” user password and press Enter.</p> <p>Verify that keys were exchanged successfully for <b>MPS A and LSMS B</b>.</p> <p>Enter the LSMS “lsmadm” user password and press Enter.</p> <p>Verify that keys were exchanged successfully for <b>MPS B and LSMS B</b>.</p>	<p>Are you sure you wish to exchange keys with LSMS? [N]:Y</p> <p>LSMS IP Address: &lt;LSMS B IP&gt;</p> <p>The server does not know of &lt;LSMS B IP&gt;. Will just exchange host keys for the name given! Password of lsmadm:*****</p> <p>Could not get authorized keys file from remote (&lt;LSMS B IP&gt;). Maybe it does not exist. Continuing... The server does not know of &lt;LSMS B IP&gt;. Will just exchange host keys for the name given! ssh is working correctly.</p> <p>The server does not know of &lt;LSMS B IP&gt;. Will just exchange host keys for the name given! Password of lsmadm: *****</p> <p>The server does not know of &lt;LSMS B IP&gt;. Will just exchange host keys for the name given! ssh is working correctly.</p>
<p>8. <input type="checkbox"/></p>	<p><b>Active ELAP:</b> Exit the “Exchange Secure Shell Keys” Menu.</p> <p>Select “e” and press Enter.</p>	<pre> /-----Exchange Secure Shell Keys Menu-----\ /-----\   1   Exchange Keys with Mate    ---- -----    2   Exchange Keys with Remote    ---- -----    3   Exchange Keys with Mate as Root User    ---- -----    4   Exchange Keys with LSMS    ---- -----    e   Exit   \-----/ </pre> <p>Enter Choice: e</p>

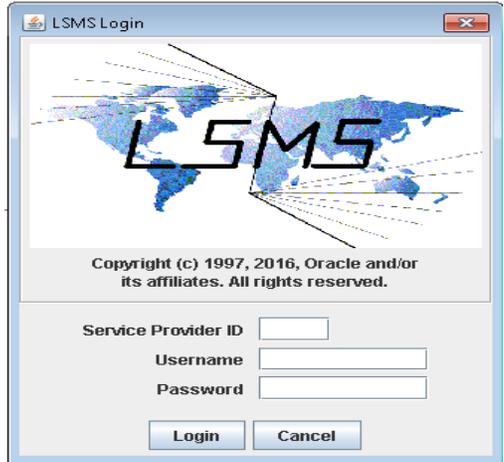
<p>9.</p> <p><input type="checkbox"/></p>	<p><b>Active ELAP:</b></p> <p>Select option e to exit.</p>	<pre> /-----Configure Network Interfaces Menu-----\ /-----\   1   Configure Provisioning Network    -----    2   Configure Sync Network    -----    3   Configure DSM Network    -----    4   Configure Backup Provisioning Network    -----    5   Configure Forwarded Ports    -----    6   Configure Static NAT Addresses    -----    7   Configure Provisioning VIP Addresses    -----    e   Exit   \-----/  Enter Choice: e         </pre>
<p>10.</p> <p><input type="checkbox"/></p>	<p><b>Active ELAP:</b></p> <p>Select option e to exit.</p>	<pre> /-----ELAP Configuration Menu-----\ /-----\   1   Display Configuration    -----    2   Configure Network Interfaces Menu    -----    3   Set Time Zone    -----    4   Exchange Secure Shell Keys    -----    5   Change Password    -----    6   Platform Menu    -----    7   Configure NTP Server    -----    8   Mate Disaster Recovery    -----    e   Exit   \-----/  Enter Choice: e         </pre>
<p>11.</p>	<p><b>Active ELAP:</b></p> <p>Note down the timestamp</p>	<p>Run the following command.</p> <p>\$date</p>

**This procedure is complete!**

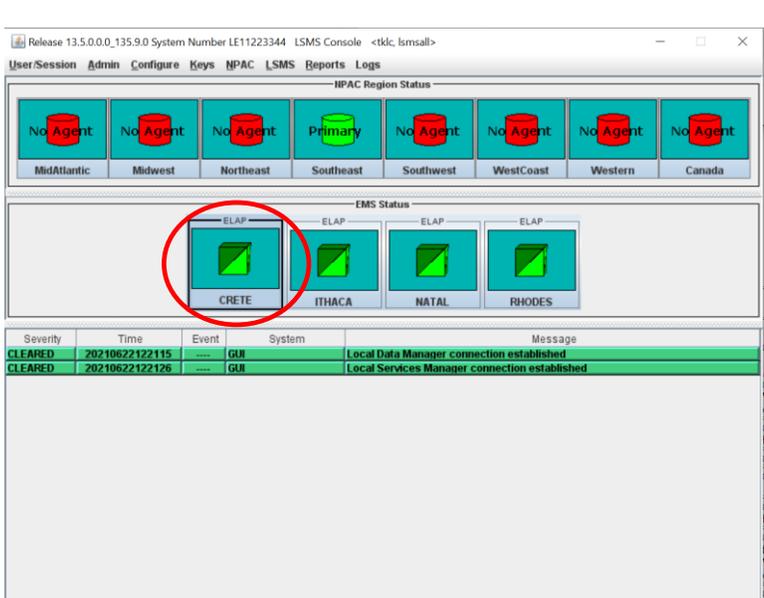
**Procedure 18 RE-POINT LSMS TO ELAP VIP**

#This procedure points the LSMS to the ELAP VIP.  
**Note: Estimated time of completion is 15 minutes.**  
 Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.  
 Should this procedure fail, Contact Oracle technical services and ask for **FULL UPGRADE ASSISTANCE**.

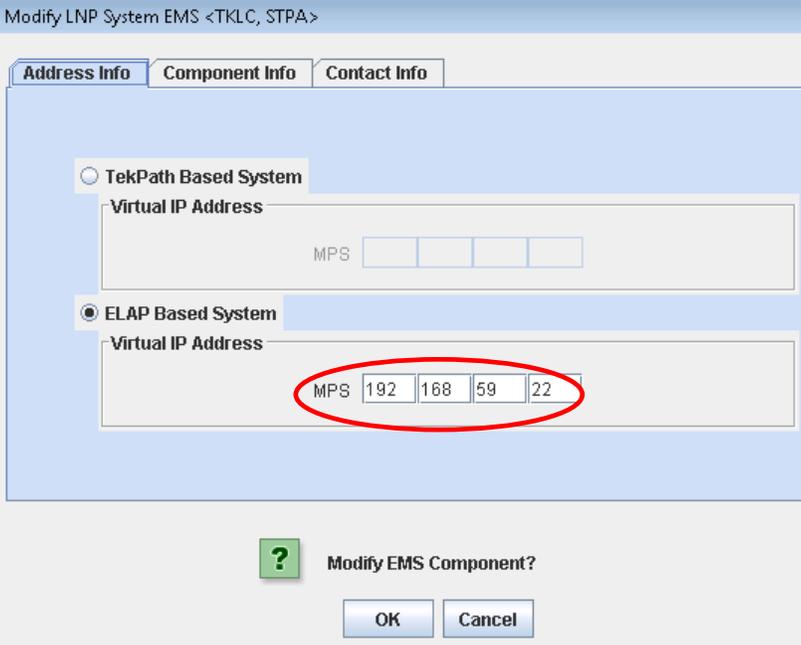
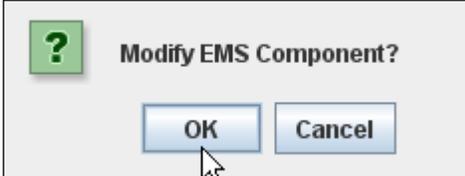
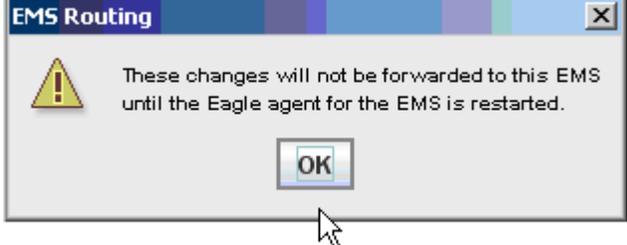
1.  **LSMS:**  
 Log in to the LSMS GUI as a member of the permission group that is authorized to perform this operation

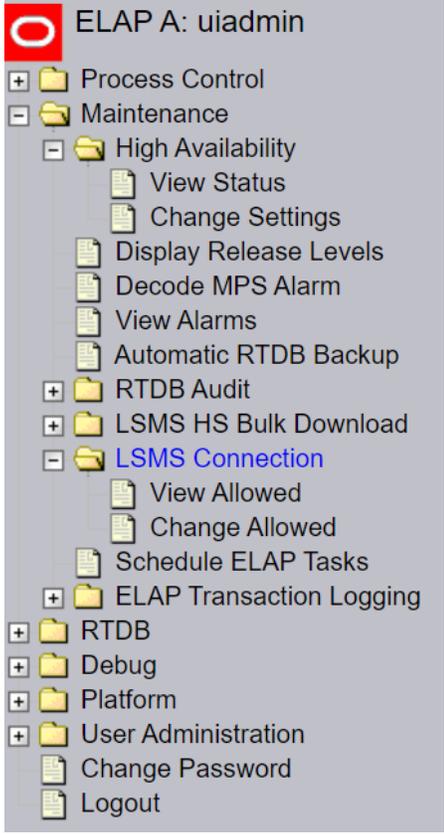
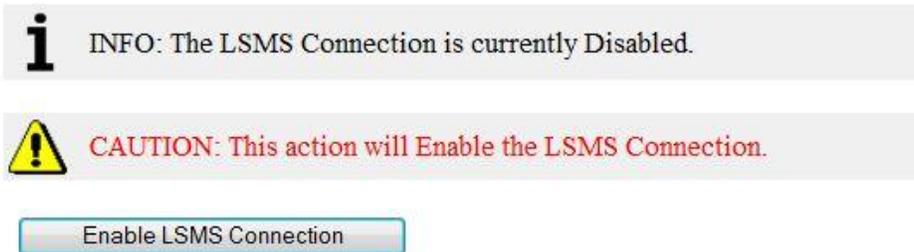


2.  **LSMS:**  
 Select the EMS being fully upgraded to 11.0.



<p>3. <input type="checkbox"/></p>	<p><b>LSMS:</b> Navigate to the following Menu selection:</p> <p><b>Configure</b> → <b>LNP System</b> → <b>EMS</b> → <b>Modify</b></p> <p><b>Note: EMS modification is only needed when there is a change in the VIP IP.</b></p>	
<p>4. <input type="checkbox"/></p>	<p><b>LSMS:</b> Select the <b>ELAP-Based System “Virtual IP Address”</b> radio button.</p>	
<p>5. <input type="checkbox"/></p>	<p><b>LSMS:</b> Enter the <b>Virtual IP Address</b> for the MPS as configured.</p>	

		
<p>6. <input type="checkbox"/></p>	<p><b>LSMS:</b> Confirm the modification by clicking <b>OK</b>.</p>	
<p>7. <input type="checkbox"/></p>	<p><b>LSMS:</b> Confirm by clicking <b>“OK”</b>.</p>	
<p>8. <input type="checkbox"/></p>	<p><b>Active ELAP GUI:</b> Using the new Virtual IP address (VIP) configured in step 5 of Procedure 12, login to Active ELAP.</p>	
<p>9. <input type="checkbox"/></p>	<p><b>Active ELAP GUI:</b> 1) Expand the “Maintenance →</p>	

	<p>LSMS Connection” folder.</p> <p>2) Select the “Change Allowed” link.</p>	 <p>The screenshot shows the ELAP A: uiadmin interface. The 'LSMS Connection' folder is expanded, showing sub-items: View Allowed, Change Allowed, and Schedule ELAP Tasks. The 'Change Allowed' item is highlighted in blue.</p>
<p>10. <input type="checkbox"/></p>	<p><b>Active ELAP GUI:</b></p> <p>In the right panel, click on the “Enable LSMS Connection” button.</p>	 <p>The dialog box contains an information message: 'INFO: The LSMS Connection is currently Disabled.' Below it is a caution message: 'CAUTION: This action will Enable the LSMS Connection.' At the bottom is a button labeled 'Enable LSMS Connection'.</p>
<p>11. <input type="checkbox"/></p>	<p><b>ELAP A GUI:</b></p> <p>A message indicating that the LSMS Connection is now Enabled should appear in the right panel.</p>	 <p>The message shows a green checkmark icon followed by the text: 'SUCCESS: The LSMS Connection is now Enabled.'</p>
<p>12. <input type="checkbox"/></p>	<p><b>LSMS:</b> Note down the timestamp in log.</p>	<p>Run the following command \$ date</p>

**This procedure is complete!**

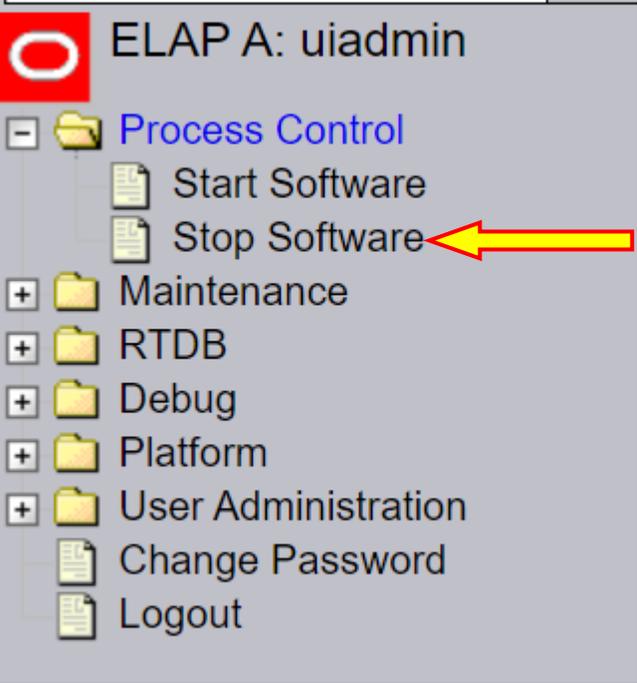
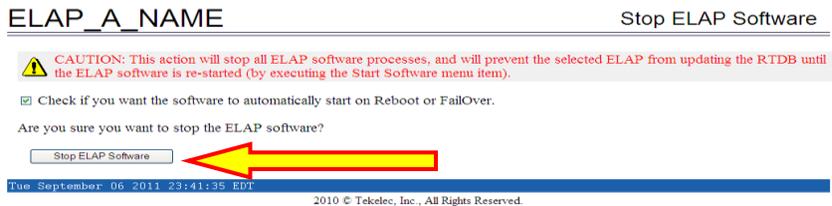
**Procedure 19 TRANSFER SERVDI BACKUP TO ELAP**

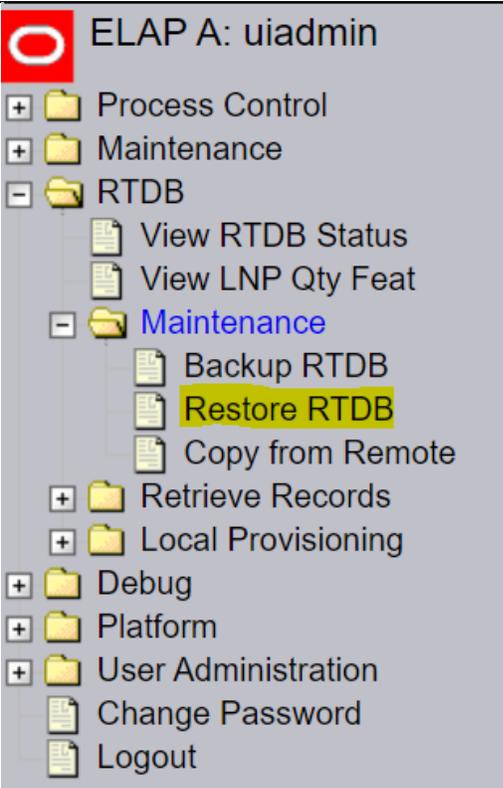
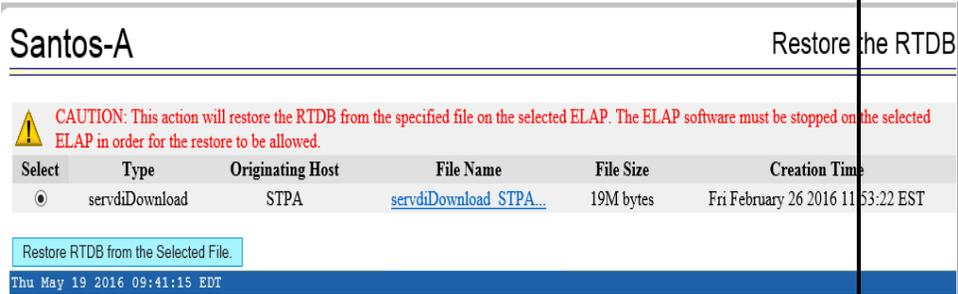
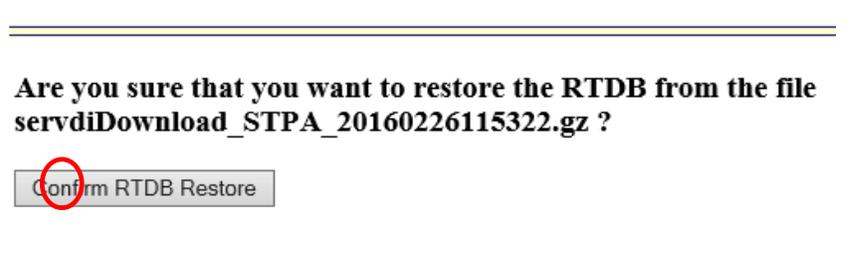
<b>S T E P #</b>	This procedure transfers the servdi backup from the LSMS to the E5APPB ELAP. Estimated time: 5 minutes	
1. <input type="checkbox"/>	<b>LSMS Standby Server:</b> Login as root.	Login: <b>root</b> Password: <b>&lt;root_password&gt;</b>
2. <input type="checkbox"/>	<b>LSMS Standby Server:</b> Change directory to the /var/TKLC/lms/free/data/servdi directory	<pre>\$ cd /var/TKLC/lms/free/data/servdi</pre>
3. <input type="checkbox"/>	<b>LSMS Standby Server:</b> List the servdi Backup File in this directory.	<pre>#ls -l servdiDownload* servdiDownload_STPA_20160226115322.gz</pre>
4. <input type="checkbox"/>	<b>LSMS Standby Server:</b> Copy the servdi Backup File to local E5APPB card.	<pre># scp -p servdiDownload_STPA_20160226115322.gz elapdev@&lt;E5APPB A IP&gt;:/var/TKLC/elap/free/backup  Or  # sftp elapdev@&lt;E5APPB A IP&gt; Connecting to &lt;E5APPB A IP&gt;... The authenticity of host '&lt;E5APPB A IP&gt;' can't be established. DSA key fingerprint is 58:a5:7e:1b:ca:fd:1d:fa:99:f2:01:16:79:d8:b4:24. Are you sure you want to continue connecting (yes/no)? yes Warning: Permanently added '&lt;E5APPB A IP&gt;' (DSA) to the list of known hosts. elapdev@&lt;E5APPB A IP&gt;'s password: sftp&gt; cd /var/TKLC/elap/free/backup sftp&gt; put servdiDownload_STPA_20160226115322.gz Uploading servdiDownl'ad_STPA_20160'2611'322.gz to servdiDownload_STPA_20160226115322.gz sftp&gt; bye</pre>
5. <input type="checkbox"/>	<b>LSMS Standby Server:</b> Note down the timestamp in log.	Run the following command <pre>\$ date</pre>

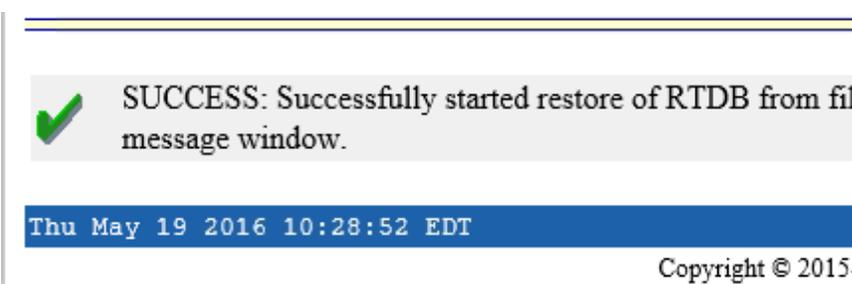
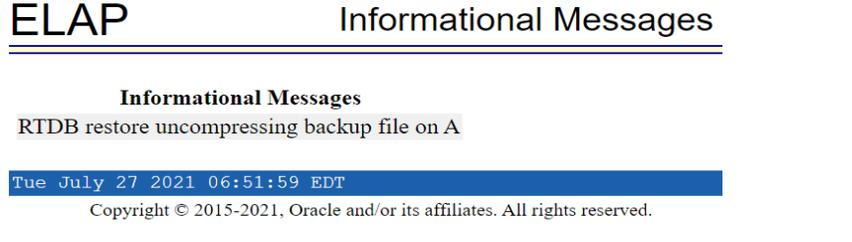
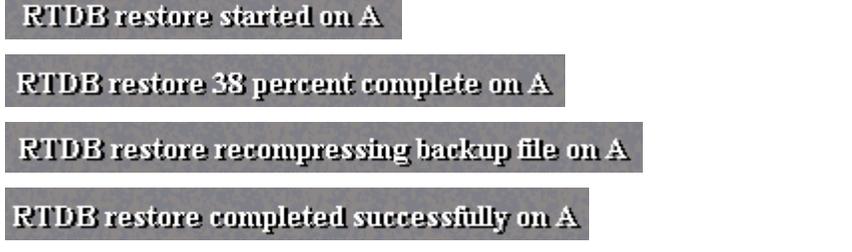
**This procedure is complete!**

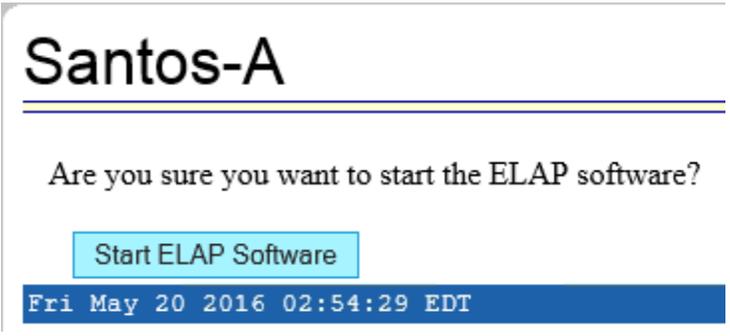
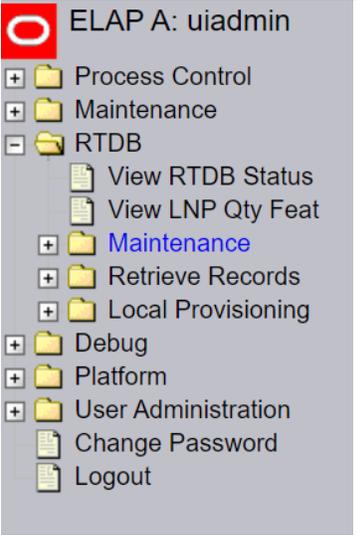
**Procedure 20 RESTORE SERVDI BACKUP**

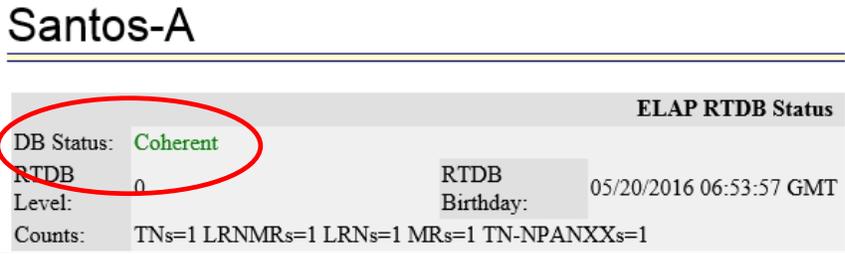
<b>S T E P</b>	This procedure restores the SERVDI Backup to the ELAP.  <b>Note: Estimated time of completion is 30 minutes.</b> Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number. Should this procedure fail, Contact Oracle technical services and ask for <b>FULL UPGRADE ASSISTANCE</b> .
----------------------------	---

#		
<p>1.</p> <input type="checkbox"/>	<p><b>Active ELAP GUI:</b></p> <p>Using the new Virtual IP address (VIP) configured in step Procedure 12, Step 5 of Procedure 13, login to Active ELAP.</p>	
<p>2.</p> <input type="checkbox"/>	<p><b>Active ELAP GUI:</b></p> <p>1) Expand the “Process Control” folder.</p> <p>2) Select the “Stop Software” link.</p>	
<p>3.</p> <input type="checkbox"/>	<p><b>Active ELAP GUI:</b></p> <p>In the right panel, click on the “Stop ELAP Software” button.</p>	
<p>4.</p> <input type="checkbox"/>	<p><b>ELAP A GUI:</b></p> <p>A message indicating that the ELAP software has been successfully halted should appear in the right panel.</p>	

<p>5.</p> <p><input type="checkbox"/></p>	<p><b>ELAP-A G</b></p> <p>1) Expand the “RTDB” folder.</p> <p>3.6.1.12) Expand the “Maintenance” sub-folder.</p> <p>3) Select the “Restore RTDB” link.</p>	 <p>ELAP A: uiadmin</p> <ul style="list-style-type: none"> <li>Process Control</li> <li>Maintenance</li> <li>RTDB             <ul style="list-style-type: none"> <li>View RTDB Status</li> <li>View LNP Qty Feat</li> <li>Maintenance                 <ul style="list-style-type: none"> <li>Backup RTDB</li> <li>Restore RTDB</li> <li>Copy from Remote</li> </ul> </li> <li>Retrieve Records</li> <li>Local Provisioning</li> </ul> </li> <li>Debug</li> <li>Platform</li> <li>User Administration</li> <li>Change Password</li> <li>Logout</li> </ul>												
<p>6.</p> <p><input type="checkbox"/></p>	<p><b>ELAP-A GUI:</b></p> <p>1) Select the database file radio button.</p> <p>2) Click on the “Restore RTDB from the Selected File” button.</p>	 <p>Santos-A <span style="float: right;">Restore the RTDB</span></p> <p><b>CAUTION:</b> This action will restore the RTDB from the specified file on the selected ELAP. The ELAP software must be stopped on the selected ELAP in order for the restore to be allowed.</p> <table border="1"> <thead> <tr> <th>Select</th> <th>Type</th> <th>Originating Host</th> <th>File Name</th> <th>File Size</th> <th>Creation Time</th> </tr> </thead> <tbody> <tr> <td><input checked="" type="radio"/></td> <td>servdiDownload</td> <td>STPA</td> <td>servdiDownload_STPA...</td> <td>19M bytes</td> <td>Fri February 26 2016 11:53:22 EST</td> </tr> </tbody> </table> <p>Restore RTDB from the Selected File.</p> <p>Thu May 19 2016 09:41:15 EDT</p>	Select	Type	Originating Host	File Name	File Size	Creation Time	<input checked="" type="radio"/>	servdiDownload	STPA	servdiDownload_STPA...	19M bytes	Fri February 26 2016 11:53:22 EST
Select	Type	Originating Host	File Name	File Size	Creation Time									
<input checked="" type="radio"/>	servdiDownload	STPA	servdiDownload_STPA...	19M bytes	Fri February 26 2016 11:53:22 EST									
<p>7.</p> <p><input type="checkbox"/></p>	<p><b>ELAP A GUI:</b></p> <p>Click on the “Confirm RTDB Restore” button.</p>	 <p><b>Are you sure that you want to restore the RTDB from the file servdiDownload_STPA_20160226115322.gz ?</b></p> <p>Confirm RTDB Restore</p>												

<p>8.</p> <p><input type="checkbox"/></p>	<p><b>ELAP A GUI:</b></p> <p>A message showing that the RTDB Restore has been successfully started should appear in the right frame.</p>	
<p>9.</p> <p><input type="checkbox"/></p>	<p><b>3.6.1.2 ELAP A GUI:</b></p> <p>The GUI banner should begin displaying the message shown to the right.</p>	
<p>10.</p> <p><input type="checkbox"/></p>	<p><b>ELAP A GUI:</b></p> <p>The messages shown to the right display the stages of the RTDB Restore.</p> <p>Monitor these messages in the GUI banner as the process progresses.</p>	
<p>11.</p> <p><input type="checkbox"/></p>	<p><b>ELAP A:</b></p> <p>The banner messages may alternatively be viewed from the command line using the “manageBannerInfo” command.</p> <p><b>NOTE:</b> <i>During this transitory state, access to the ELAP-A GUI may terminate unexpectedly. If sustained GUI access is problematic at this time, you may monitor these messages from the ELAP-A command line.</i></p>	<pre>[elapdev@E5APP-B-a ~]\$ manageBannerInfo -1 ID: RESTORE_RTDB_STATUS  SIDE: A MSG: RTDB restore 51 percent complete SetTime: 2016-05-19 10:29:13  ClearTime: 0000-00-00 00:00:00 [elapdev@E5APP-B-a ~]\$</pre>
<p>12.</p> <p><input type="checkbox"/></p>	<p><b>ELAP A:</b></p> <p>If monitoring from the ELAP-A command line, the messages shown to the right display the stages of the RTDB Restore.</p>	<pre>MSG: RTDB restore started MSG: RTDB restore 13 percent complete MSG: RTDB restore completed successfully MSG: RTDB restore recompressing backup file There are currently no BannerInfo messages for this side in the database.</pre>

<p>13. <input type="checkbox"/></p>	<p><b>ELAP A GUI:</b></p> <p>1) Expand the “Process Control” folder.</p> <p>2) Select the “Start Software” link.</p>	
<p>14. <input type="checkbox"/></p>	<p><b>ELAP A GUI:</b></p> <p>In the right panel, click on the “Start ELAP Software” button.</p>	
<p>15. <input type="checkbox"/></p>	<p><b>ELAP A GUI:</b></p> <p>A message indicating that the ELAP software has been successfully started should appear in the right panel.</p>	
<p>16. <input type="checkbox"/></p>	<p><b>ELAP A GUI:</b></p> <p>3.6.1.31) Expand the “RTDB” folder.</p> <p>2) Select the “View RTDB Status” link.</p>	
<p>17. <input type="checkbox"/></p>	<p><b>ELAP A GUI:</b></p>	

	<p>Verify the “DB Status” and the “RTDB Level” shown in the right panel.</p>	 <p><b>Santos-A</b></p> <hr/> <p style="text-align: right;"><b>ELAP RTDB Status</b></p> <p>DB Status: <b>Coherent</b></p> <p>RTDB Level: 0      RTDB Birthday: 05/20/2016 06:53:57 GMT</p> <p>Counts: TNs=1 LRNMRs=1 LRNs=1 MRs=1 TN-NPANXXs=1</p>
<p>18.</p> <p><input type="checkbox"/></p>	<p><b>ELAP A GUI:</b></p> <p>Record the “DB Status” and the “RTDB Level” shown in the previous STEP.</p>	<p>DB Status = _____</p> <p>3.6.1.4      RTDB Level = _____</p>
<p>19.</p>	<p><b>LSMS:</b></p> <p>Login to the LSMS CLI as the “<b>lsmsadm</b>” user.</p>	
<p>20.</p>	<p><b>LSMS:</b></p> <p>Login to the LSMS CLI as the “<b>lsmsadm</b>” user.</p>	<pre>lsmsadm@&lt;ISMS IP&gt;'s password: Last login: wed Jul 9 18:40:24 2008 from 10.25.150.101 [lsmsadm@lsmspri ~]\$</pre>
<p>21.</p>	<p><b>LSMS:</b></p> <p>Execute an “<b>eagle status</b>” command to verify the current status of the CLLI (EMS site being fully upgraded to 10.1).</p>	<pre>[lsmsadm@lsmspri ~]\$ eagle status CLLI Pid State Resync Conn A Conn B EBDA Debug Queue Memory CPU Timestamp ELAP21 32269 A_ACTIVE COMPLETE ACTIVE --- IDLE OFF 0 % 500 M 0.0 % 17:42:59 STPA 15565 NONE_ACTIVE NO_CONNECTION DOWN --- IDLE OFF 0 % 500 M 0.0 % 17:43:00</pre>
<p>22.</p>	<p><b>LSMS:</b></p> <p>Execute an “<b>eagle stop</b>” command using the CLLI of the EMS site being migrated to 11.0.</p>	<pre>[lsmsadm@lsmspri ~]\$ eagle stop ELAP21 eagle: Stopping... eagle: eagleagent ELAP21 stopped at wed Apr 27 17:43:25 2016</pre>
<p>23.</p>	<p><b>LSMS:</b></p> <p>Execute an “<b>eagle start</b>” command using the CLLI of the EMS site being fully upgraded to 11.0.</p>	<pre>[lsmsadm@lsmspri ~]\$ eagle start ELAP21 eagle: Starting... eagle: eagleagent ELAP21 started at wed Apr 27 17:43:48 2016</pre>
<p>24.</p>	<p><b>LSMS:</b></p> <p>1) Execute an “<b>eagle status</b>” command using the CLLI of the EMS site being fully upgraded to 11.0.</p> <p>2) Verify that the “<b>State</b>” and the “<b>Connection VIP</b>”</p>	<pre>[lsmsadm@lsmspri ~]\$ eagle status ELAP21 eagleagent: CLLI = ELAP21 Pid = 3110 State = NONE_ACTIVE Resync = NO_CONNECTION Connection VIP = ACTIVE EBDA = IDLE Debug logging = OFF Pending queue = 0 of 2000000 bytes (0%) Keepalive timestamp = wed Apr 27 17:45:19 IST 2016 Virtual memory = 500308 K bytes CPU usage = 0.0 %</pre>

	reflect the values shown to the right.	
25. <input type="checkbox"/>	<b>ELAP A GUI:</b> Note down the timestamp in log.	Run the following command \$ date

**This procedure is complete!**

**Procedure 21 POST FULL UPGRADE SYSCHECK**

S T E P #	<p>This procedure runs an initial system check to validate the software install and system readiness.</p> <p><b>Note: Estimated time of completion is 5 minutes.</b></p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>Should this procedure fail, Contact Oracle technical services and ask for <b>FULL UPGRADE ASSISTANCE</b>.</p>	
1. <input type="checkbox"/>	<p><b>MPS A:</b></p> <p>Login as root.</p>	<pre>login: root Password: &lt;root_password&gt;</pre>
2. <input type="checkbox"/>	<p><b>MPS A:</b></p> <p>Issue the command to retrieve the system status</p>	<pre># syscheck</pre>
3. <input type="checkbox"/>	<p><b>MPS A:</b></p> <p>The syscheck response is displayed.</p> <p>Verify all components are “OK” on the mate ELAP</p> <p><b>NOTE:</b></p> <p>Investigate the cause of any failure in the syscheck response. Correct the issue or contact Support for resolution before proceeding.</p>	<pre>Running modules in class disk... OK Running modules in class hardware... OK Running modules in class net... OK Running modules in class proc... OK Running modules in class services... OK Running modules in class system... OK Running modules in class upgrade... OK LOG LOCATION: /var/TKLC/log/syscheck/fail_log</pre>
4. <input type="checkbox"/>	<p><b>MPS A:</b></p> <p>Issue the command to retrieve the system status on the mate ELAP</p>	<pre># ssh admusr@mate 'sudo syscheck'</pre>
5. <input type="checkbox"/>	<p><b>MPS A:</b></p> <p>The syscheck response is displayed.</p> <p>Verify all components are “OK” on the mate ELAP</p>	<pre>Running modules in class disk... OK Running modules in class hardware... OK Running modules in class net... OK Running modules in class proc... OK Running modules in class services... OK Running modules in class system...</pre>

		Running modules in class upgrade... OK OK LOG LOCATION: /var/TKLC/log/syscheck/fail_log
6.	<b>MPS A:</b> Note down the timestamp in log. <input type="checkbox"/>	Run the following command \$ date

**This procedure is complete!**

**Procedure 22 ACCEPT THE UPGRADE**

S T E P #	A	B	This procedure will accept the upgrade. Estimated time: 5 minutes
1.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Log in to the server as the user “root”.</p> <p>LogIn: <b>root</b> Password: &lt;root_password&gt;</p>
2.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Start platcfg utility.</p> <p># su - platcfg</p>
3.	<input type="checkbox"/>	<input type="checkbox"/>	<p><b>MPS X:</b> Accept Upgrade</p> <p>On the “Main Menu”, select <b>Maintenance</b> and press [ENTER].</p> <div style="border: 1px solid gray; padding: 5px; background-color: #f0f0f0;"> <p style="text-align: center; color: red; margin: 0;">Main Menu</p> <pre style="margin: 0;"> Maintenance Diagnostics Server Configuration Network Configuration Remote Consoles Exit                     </pre> </div> <p>Select the “Upgrade” menu and press [ENTER].</p> <div style="border: 1px solid gray; padding: 5px; background-color: #f0f0f0;"> <p style="text-align: center; color: red; margin: 0;">Maintenance Menu</p> <pre style="margin: 0;"> Upgrade Backup and Restore View Mail Queues Restart Server Save Platform Debug Logs Exit                     </pre> </div> <p>Select the “Accept Upgrade” menu and press [ENTER].</p>



<p>4.</p>	<p><input type="checkbox"/> <input type="checkbox"/></p>	<p><b>MPS X:</b> If accept upgrade fails but disk redundancy is restored, follow these steps to remove the false alarm of upgrade pending accept.</p>	<p>Following error is observed when accepting the upgrade fails:</p> <pre>Called with options: --accept Loading Backout::BackoutType::SPLIT_MIRROR Accepting Upgrade Re-joining raid mirrors.   Adding /dev/sdb3 to /dev/md1 mdadm: added /dev/sdb3   Adding /dev/sdb2 to /dev/md2 mdadm: re-added /dev/sdb2       md1 is syncing...       md2 is syncing...       Adding /dev/sdb1 to /dev/md3 ERROR: Command Failed! ERROR: Child process has exited with:   CMD: '/sbin/mdadm --add /dev/md3 /dev/sdb1'   RC: 1   SIGNAL: 0   CORE: no &lt;&lt;&lt; CMD OUTPUT &gt;&gt;&gt; mdadm: Cannot open /dev/sdb1: Device or resource busy  &lt;&lt;&lt; END OF CMD OUTPUT &gt;&gt;&gt; ERROR: Failed to accept upgrade. mdadm: Cannot open /dev/sdb1: Device or resource busy === window terminated (Thu Jan 16 13:17:39 2020) ===</pre> <p>Check disk redundancy by below command.</p> <pre># cat /proc/mdstat</pre> <p><b>NOTE: If you observe the output as given below then follow the APPENDIX F remove the false alarm. Here [UU] implies both the mirror disks are synchronized</b></p> <pre># cat /proc/mdstat Personalities : [raid1] md1 : active raid1 sdb3[2] sda3[0]       262080 blocks super 1.0 [2/2] [UU]  md2 : active raid1 sdb2[1] sda2[0]       26198016 blocks super 1.1 [2/2] [UU]       bitmap: 1/1 pages [4KB], 65536KB chunk  md3 : active raid1 sdb1[1] sda1[0]       442224640 blocks super 1.1 [2/2] [UU]       bitmap: 3/4 pages [12KB], 65536KB chunk</pre>
<p>5.</p>	<p><input type="checkbox"/> <input type="checkbox"/></p>	<p><b>MPS X:</b> Note down the timestamp in log.</p>	<p>Run the following command</p> <pre>\$ date</pre>

**This procedure is complete!**

**Procedure 23 DETERMINE IF UPGRADE OR INSTALLATION IS REQUIRED**

<b>S T E P #</b>	<p>This procedure executes the steps required to determine if an incremental upgrade of the system is required or an initial application installation is required.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p><b>IF THIS PROCEDURE FAILS, CONTACT MY ORACLE SUPPORT AND ASK FOR INCREMENTAL UPGRADE ASSISTANCE.</b></p>	
1. <input type="checkbox"/>	<p><b>MPS A:</b> Log in to MPS A.</p>	<p>If not already logged-in, login at MPS A as ‘admusr’.</p> <pre>&lt;hostname&gt; console login: admusr password: &lt;password&gt;</pre> <p>If ‘admusr’ is not available, then login as ‘root’ user.</p>
2.	<p><b>MPS B:</b> Log in to MPS B.</p>	<p>If not already logged-in, login at MPS B as ‘admusr’.</p> <pre>&lt;hostname&gt; console login: admusr password: &lt;password&gt;</pre> <p>If ‘admusr’ is not available, then login as ‘root’ user.</p>
3. <input type="checkbox"/>	<p><b>MPS X:</b> Verify the TPD release.</p>	<p>Execute the following command to verify the TPD release on the MPS.</p> <pre># getPlatRev</pre> <p>If no output is displayed, then contact the My Oracle Support by following the instructions on the front page or the instructions in the Appendix E, to know whether to perform Procedure 5 to install the operating system on the MPS. After installing the operating system, proceed with this procedure.</p> <p>Otherwise, if the following output is displayed, then the MPS has been installed with the correct operating system. Proceed with this procedure.</p> <pre># getPlatRev 8.10.1.9.0_150.20.0</pre>
4. <input type="checkbox"/>	<p><b>MPS X:</b> Determine if the application is currently installed on the servers.</p> <p>(MPS B will be used to determine the current state of the servers. We will assume that the state of the A server is the same.)</p>	<p>Execute an rpm query command and examine the output:</p> <pre>\$ rpm -qi TKLCELap</pre>

<p>5. <input type="checkbox"/></p>	<p><b>MPS X:</b> Observe the output from the rpm query.</p>	<p>The following is an example of what the output may look like:</p> <pre>\$rpm -qi TKLCelap Name           : TKLCelap Version        : 5.0.65 Release        : 11.0.0.0.0_110.3.0 Architecture   : x86_64 Install Date   : Wed 22 Nov 2023 05:56:19 AM EST Group          : Development/Build Size           : 197639393 License        :  TEKELEC 2018 Signature      : (none) Source RPM     : TKLCelap-5.0.65-11.0.0.0.0_110.3.0.src.rpm Build Date    : Thu 16 Nov 2023 03:02:21 AM EST Build Host     : coach-14.tekelec.com Relocations    : (not relocatable) Packager       : &lt;@tekelec.com&gt; Vendor        : Tekelec URL            : http://www.tekelec.com/ Summary       : Oracle Communications ELAP Package Description    :  This is the Oracle Communications EAGLE LNP Application Processor (ELAP) package.  The package installs ELAP software. Eagle LNP Application Processor (ELAP) provides REALLY INCREDIBLE Database (RIDB). ELAP provides the LNP feature.  NOTE: Output is dependent on source release.  If the output similar to the above example is displayed, then skip to step 7. Otherwise, proceed to the next step.</pre>
------------------------------------	---	---

<p>6. <input type="checkbox"/></p>	<p><b>MPS X:</b> Installation is required if the application is not present on the server, else incremental upgrade is required.</p>	<p>Run the following command:</p> <pre>\$ rpm -qi TKLCelap</pre> <p>package TKLCelap is not installed</p> <p>If the application is not currently installed, output similar to the above will be returned from the rpm -qi command in the previous step. If this is the case, then an application installation is required.</p>
<p>7. <input type="checkbox"/></p>	<p>Determine if it is an incremental upgrade or incremental upgrade with split mirror or full upgrade.</p>	<p>If the target release is 11.0.x (less than the number on the upgrade media), it is a full upgrade.</p>
<p>8. <input type="checkbox"/></p>	<p><b>MPS X:</b> Procedure Complete.</p>	<p>This procedure is complete.</p>

**Procedure 24 VERIFYING AND CAPTURING REQUIREMENTS**

<p>S T E P #</p>	<p>This procedure verifies that all pre-upgrade requirements have been met.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p><b>IF THIS PROCEDURE FAILS, CONTACT MY ORACLE SUPPORT AND ASK FOR <u>UPGRADE ASSISTANCE</u>.</b></p>	
<p>1. <input type="checkbox"/></p>	<p>Verify all required materials are present.</p>	<p>Verify that the materials listed in Incremental upgrade Material List (Section 2.1) are present.</p>
<p>2. <input type="checkbox"/></p>	<p>Procedure Complete.</p>	<p>This procedure is complete.</p>

**3.7 SM Migration**

**Procedure 25 SM CARDS - CABLE MIGRATION AND DB RELOAD**

<p>S T</p>	<p>This procedure initializes the SM cards to the RTDB databases on the E5APPB cards.</p>
----------------	---

<b>E P #</b>	<p><b>Note: Estimated time of completion is 45 minutes.</b></p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>Should this procedure fail, Contact Oracle technical services and ask for <b>MIGRATION ASSISTANCE</b>.</p>	
1. <input type="checkbox"/>	<p><b>Eagle: Replace DSM with SLIC</b></p> <p>Replace all the DSM cards with SLIC cards.</p>	
2. <input type="checkbox"/>	<p><b>Eagle STP connected to ELAP servers:</b> Login to the Eagle STP.</p>	<pre>login:uid=&lt;Eagle_STP_username&gt; password: &lt;Eagle_STP_username_password&gt;  Note. Password is not displayed.</pre>
3. <input type="checkbox"/>	<p><b>Eagle STP connected to ELAP servers:</b> Change IP link for both A and B port for the new SMxG card.</p> <p><b>Note:</b> This step should be done for all new SMxG cards, where xxxx is the location of a SM card.</p>	<pre>inh-card:loc=XXXX chg-ip- lnk:loc=XXXX:ipaddr=www.xxx.yyy.zzz:port=a:auto=yes:mcast= yes:submask=aaa.bbb.ccc.ddd chg-ip-lnk:auto=yes:port=b:loc=XXXX  Add defrouter and bpipaddr using the below command then allow the SCCP card: chg-ip- card:defrouter=aaa.bbb.ccc.ddd:bpipaddr=www.xxx.yyy.zzz:bp submask=eee.fff.ggg.hhh:loc=XXXX  alw-card:loc=XXXX  (where xxxx is the location of a replaced SM card)</pre>
4. <input type="checkbox"/>	<p><b>Eagle STP connected to ELAP servers:</b> Issue the command to display card status.</p> <p>Repeat this step until the SM cards have been reloaded but wait until the cards go IS-NR before modifying IP link of another card.</p>	<pre>rept-stat-card:loc=XXXX  (where xxxx is the location of a replaced SM card in step [3])  tklcl1110903 21-04-08 00:20:06 MST EAGLE 47.0.0.0.0- 78.10.0 rept-stat-card:loc=1105 Command entered at terminal #2. ;  tklcl1110903 21-04-08 00:20:06 MST EAGLE 47.0.0.0.0- 78.10.0 CARD VERSION TYPE GPL PST SST AST 1105 148-010-000 SLIC SCCP64 IS-NR Active ----- ALARM STATUS = No Alarms. BLSLC64 GPL version = 148-009-000 IMT BUS A = Conn IMT BUS B = Conn CURRENT TEMPERATURE = 41C (106F) PEAK TEMPERATURE: = 43C (110F) [21-04-06 05:43] SCCP % OCCUP = 0% SCCP SM DATA TYPE = ELAP</pre>

		<p>Command Completed. ;</p>
<p>5. <input type="checkbox"/></p>	<p><b>Eagle STP connected to ELAP servers:</b> Change IP link for the rest of SM cards.</p>	<p>Repeat steps [3] and [4] for the rest of SM cards which were replaced for DSM cards.</p>
<p>6. <input type="checkbox"/></p>	<p><b>Eagle STP connected to ELAP servers:</b> Verify no other RTDB reload alarms are present on the Eagle.</p>	<p><b>rept-stat-trb1</b></p>
<p>7. <input type="checkbox"/></p>	<p><b>Eagle STP connected to ELAP servers:</b> Response to trouble command is displayed.  Output can vary depending of EAGLE STP status.</p>	<pre> cdsitu 13-02-11 15:32:46 EDT EAGLE5 47.0.0.0.0-78.10.0 Searching devices for alarms... ;  cdsitu 13-02-11 15:32:46 EDT EAGLE5 47.0.0.0.0-78.10.0 SEQN UAM AL DEVICE ELEMENT TROUBLE TEXT 7721.0048 * TERMINAL 1 Terminal failed 9492.0048I * TERMINAL 2 Terminal failed 5088.0002 * GPL SYSTEM BPDCM Card is not running approved GPL * 0100.0444 * CARD 1108 VSCCP RTDB database is inconsistent 0100.0448 * CARD 1108 VSCCP RTDB database incoherent ** 0100.0451 ** CARD 1108 VSCCP RTDB reload required Command Completed. ;                     </pre>
<p>8. <input type="checkbox"/></p>	<p><b>Eagle STP connected to ELAP servers:</b> Verify Databases Output is displayed  Verify the Current Database levels to the level of the database restored on the E5APPB  The new database level on E5APPB can be found using the GUI RTBD→View RTDB Status.</p>	<pre> <b>rept-stat-db:display=all:db=mps</b> Command Accepted - Processing  cdsitu 13-02-11 15:56:50 EDT EAGLE5 47.0.0.0.0-78.10.0 rept-stat-db:display=all:db=mps Command entered at terminal #14. ;  cdsitu 13-02-11 15:56:50 EDT EAGLE5 47.0.0.0.0-78.10.0 ELAP A ( STDBY )   C  BIRTHDATE          LEVEL          EXCEPTION ----- PDB          13-01-16 13:04:04      2013160      - RTDB         Y 13-01-16 13:04:04      2013160      - RTDB-EAGLE   13-01-16 13:07:34      2013160      -  ELAP B ( ACTV )   C  BIRTHDATE          LEVEL          EXCEPTION ----- PDB          13-01-16 13:04:04      2013160      - RTDB         Y 13-01-16 13:04:04      2013160      - RTDB-EAGLE   13-01-16 13:07:34      2013160      -  EAGLE RTDB REPORT CARD/APPL  LOC  C  BIRTHDATE          LEVEL          EXCEPTI ----- VSCCP      1103 Y 13-01-16 13:07:34   2013160      -          26d 2h 21m                     </pre>

		VSCCP 1105 Y 13-01-16 13:07:34 2013160 - 26d 2h 22m
9. <input type="checkbox"/>	<b>Eagle STP connected to ELAP servers:</b> Issue the command to display SCCP status.	<b>rept-stat-sccp</b>
10. <input type="checkbox"/>	<b>Eagle STP connected to ELAP servers:</b> Response to SCCP status command is displayed.  Note card location of all SM cards: SM _____ SM _____ SM _____ SM _____ SM _____	<pre> tekelecstp xx-03-09 19:47:19 EST Re1 XX.X.X SCCP SUBSYSTEM REPORT IS-NR Active ----- SCCP Cards Configured= 4 Cards IS-NR= 4 Capacity Threshold = 60% CARD  VERSION      PST      SST      AST      MSU       USAGE      CPU USAGE ----- NR      1103      XXX-XXX-XXX IS-           Active      DB_DIFF      29%      4% NR      1105      XXX-XXX-XXX IS-           Active      DB_DIFF      33%      5% NR      1111      XXX-XXX-XXX IS-           Active      DB_DIFF      39%      6% ----- SCCP Service Average MSU Capacity = 33% Average CPU Capacity = 5% Command Completed. ; </pre>
11. <input type="checkbox"/>	<b>Eagle STP connected to ELAP servers:</b> Issue the initialize card command for 1 SM card.  <b>Note:</b> This step should be done for 1 SM card, where xxxx is the location of a SM card.	<b>init-card:loc=XXXX</b>  (Where XXXX is the location of a SM card recorded in step [10])
12. <input type="checkbox"/>	<b>Eagle STP connected to ELAP servers:</b> Response to the initialize command is displayed.	<pre> tekelecstp YY-MM-DD hh:mm:ss EST PPP XX.X.X-YY.y.y * 0261.0013 * CARD XXXX Card is isolated from the system ; tekelecstp YY-MM-DD hh:mm:ss EST PPP XX.X.X-YY.y.y 5038.0014 CARD XXXX Card is present ; </pre>
13. <input type="checkbox"/>	<b>Eagle STP connected to ELAP servers:</b> Monitor the progress of SM card being reinitialized	Repeat steps [6] to [10] as necessary to monitor the progress of the SM card being reinitialized and until it is in normal state (IS-NR).
14. <input type="checkbox"/>	<b>Eagle STP connected to ELAP servers:</b> Issue the initialize card command for the rest of SM cards.	Repeat steps [11] to [13] for the rest of SMxG cards in 4 batches (booting 1/4 of the cards at a single time).  Note: This step should be done for each SMxG card, where xxxx is the location of each SM card from steps [10], repeat this step until all SM cards have been reloaded but wait until the cards go IS-NR before initializing other set of cards.

<p>15. <input type="checkbox"/></p>	<p><b>Eagle STP connected to ELAP servers:</b> Verify MPS Database Output is displayed.</p> <p>Verify the Current Database levels on SM cards matches with the level of the database restored on the E5APPB.</p> <p>The new database level on E5APPB can be found using the GUI RTBD→View RTDB Status.</p>	<pre> rept-stat-db:display=all:db=mps Command Accepted - Processing cdsitu 13-02-11 15:56:50 EDT EAGLE5 47.0.0.0-78.10.0 rept-stat-db:display=all:db=mps Command entered at terminal #14. ;  cdsitu 13-02-11 15:56:50 EDT EAGLE5 47.0.0.0-78.10.0 ELAP A ( STDBY )   C  BIRTHDATE          LEVEL          EXCEPTION ----- PDB          13-01-16 13:04:04      18918      - RTDB         Y 13-01-16 13:04:04      18918      - RTDB-EAGLE   13-01-16 13:07:34      18918      -  ELAP B ( ACTV )   C  BIRTHDATE          LEVEL          EXCEPTION ----- PDB          13-01-16 13:04:04      18918      - RTDB         Y 13-01-16 13:04:04      18918      - RTDB-EAGLE   13-01-16 13:07:34      18918      -  EAGLE RTDB REPORT CARD/APPL  LOC  C  BIRTHDATE          LEVEL          EXCEPTI ----- VSCCP      1103 Y 13-01-16 13:07:34   18918 -          26d 2h 21m VSCCP      1105 Y 13-01-16 13:07:34   18918 -          26d 2h 22m ;                     </pre>
<p>16. <input type="checkbox"/></p>	<p><b>Eagle STP connected to ELAP servers:</b> Issue the command to display SCCP status.</p>	<pre> rept-stat-sccp                     </pre>
<p>17. <input type="checkbox"/></p>	<p><b>Eagle STP connected to ELAP servers:</b> Response to SCCP status command is displayed.</p>	<pre> tekelecstp xx-03-09 19:47:19 EST Re1 XX.X.X SCCP SUBSYSTEM REPORT IS-NR Active ----- SCCP Cards Configured= 4 Cards IS-NR= 4 Capacity Threshold = 60% CARD  VERSION  PST  SST  AST  MSU  USAGE  CPU  USAGE ----- 1103  XXX-XXX-XXX IS-NR Active ----- 29% 4% 1105  XXX-XXX-XXX IS-NR Active ----- 33% 5% 1111  XXX-XXX-XXX IS-NR Active ----- 39% 6%  SCCP Service Average MSU Capacity = 33% Average CPU Capacity = 5% Command Completed. ;                     </pre>
<p>18. <input type="checkbox"/></p>	<p><b>Eagle STP connected to ELAP servers:</b> Verify no other RTDB reload alarms are present on the Eagle.</p>	<pre> rept-stat-trb1                     </pre>

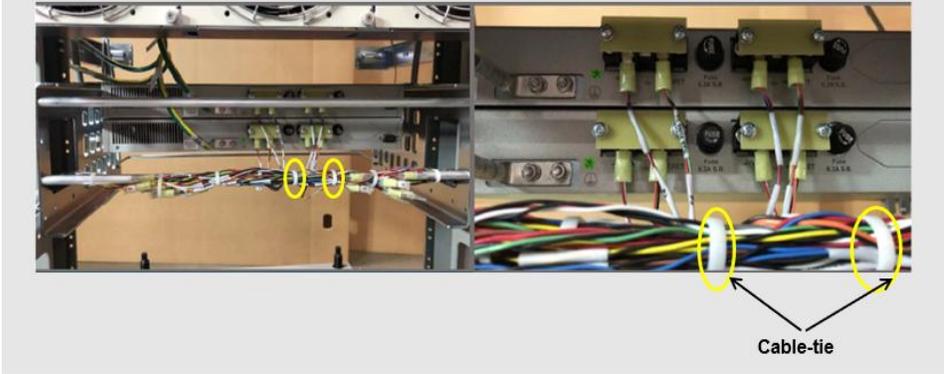
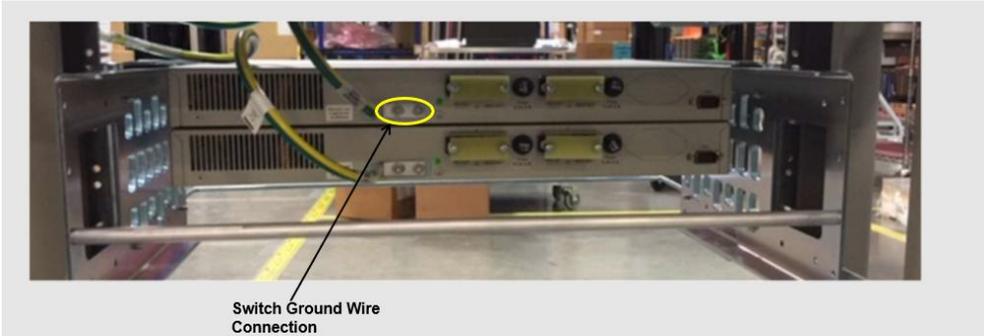
<p>19. <input type="checkbox"/></p>	<p><b>Eagle STP connected to ELAP servers:</b> Response to trouble command is displayed.  Output can vary depending of EAGLE STP status.</p>	<pre> cdsitu 13-02-11 15:32:46 EDT EAGLE5 47.0.0.0.0-78.10.0 Searching devices for alarms... ;  cdsitu 13-02-11 15:32:46 EDT EAGLE5 47.0.0.0.0-78.10.0 SEQN UAM AL DEVICE ELEMENT TROUBLE TEXT 7721.0048 * TERMINAL 1 Terminal failed 9492.0048I * TERMINAL 2 Terminal failed 5088.0002 * GPL SYSTEM BPDCM Card is not running approved GPL Command Completed. ; </pre>
---	--	---

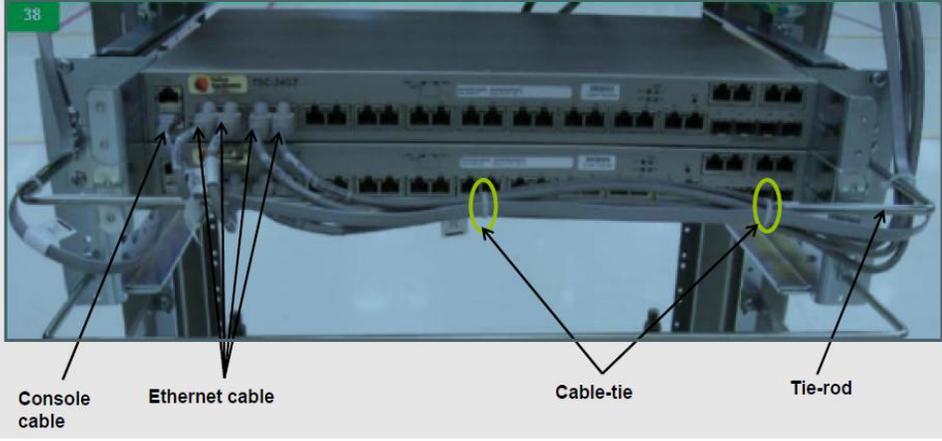
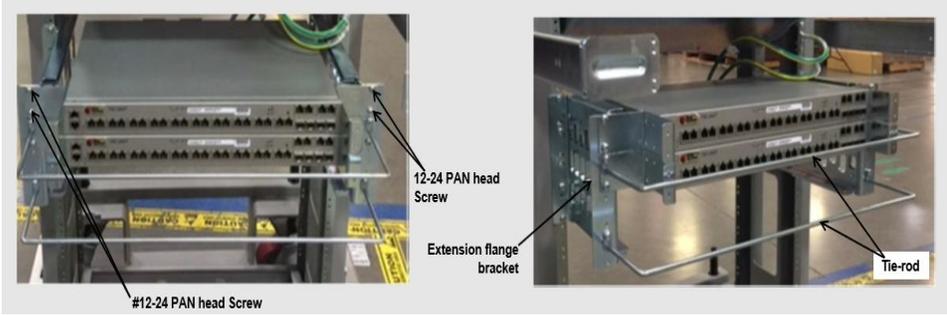
**This procedure is complete!**

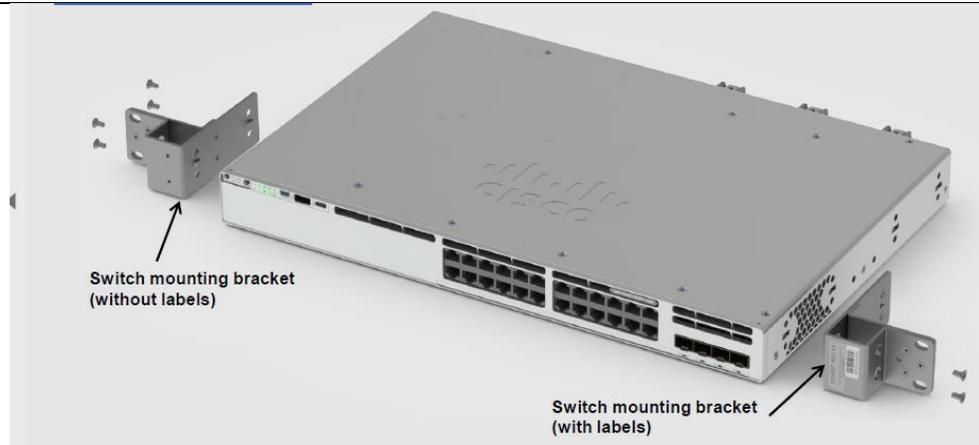
## APPENDIX A. TELCO TO CISCO SWITCH REPLACEMENT

### A.1 SWITCH REPLACEMENT

<p>S T E P #</p>	<p>This procedure is for replacing the Telco switch with the Cisco switch.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>IF THIS PROCEDURE FAILS, CONTACT MY ORACLE SUPPORT AND ASK FOR ASSISTANCE.</p>	
<p><b>The following tools are required to perform this procedure:</b></p> <ul style="list-style-type: none"> <li>• Ground Strap (Wrist or Heel)</li> <li>• #2 Phillips Screwdriver</li> <li>• #3 Phillips Screwdriver</li> <li>• 1/4" Nut Driver or Socket</li> <li>• 5/16" Nut Driver or Socket</li> <li>• Diagonal Wire Cutter (to cut Tie-wraps)</li> <li>• Multi Meter</li> <li>• Tie Wraps</li> <li>• Electrical Tape</li> <li>• Cable Tags/Marker (to label all cables)</li> </ul>		
<p><b>1.</b> <input type="checkbox"/></p>	<p>Disable and disconnect switch power</p>	<p><b>Tools required:</b> Ground Strap, #2 Phillips Screwdriver, Multi Meter, and Diagonal Wire Cutter</p> <ol style="list-style-type: none"> <li>a. At the fuse panel, locate the fuse positions for the switch being removed. To power down the Switch, remove the fuses for both A and B feeds.</li> <li>b. Once the switch is off, unscrew and remove the terminal-block insulator covers from both terminals blocks A and B.</li> <li>c. With covers removed, using a Multi Meter, ensure that there is no power.</li> <li>d. Ensure that the power leads are marked -48V &amp; RTN.</li> <li>e. With the cables marked, one at a time, remove the power cable and tape the terminal ring. Repeat these steps until all power connections are removed.</li> </ol> <div data-bbox="516 1270 1448 1606" style="text-align: center;"> </div> <p>Note: This procedure will reference replacing the Switch #1 location (top). Same procedure is applicable for other switch locations.</p>

		 <p>Note: For the replacement switch, if required, more cable slack/length can be added if the cable-ties are cut from the Tie-rod. See Step 8.</p>
<p>2. □</p>	<p>Disconnect ground cable from switch</p>	<p><b>Tools required:</b> Ground Strap and 5/16" Nut Driver or Socket</p> <ol style="list-style-type: none"> <li>Remove the Switch Ground Wire from the grounding point, by loosening and removing Hex nut, Flat washer, and External tooth washer.</li> <li>Leave Ground Wire dangling. Do not disconnect ground wire attached to cabinet/frame.</li> </ol> <p>Note: Hardware removed, nut, and washers are NOT required on the replacement switch.</p> 
<p>3. □</p>	<p>Disconnect Front ENET and Console Cables</p>	<p><b>Tools required:</b> Diagonal Wire Cutters</p> <p>Note: This procedure will reference replacing the Switch #1 location (Top). The same procedure used for other switch locations.</p> <ol style="list-style-type: none"> <li>Make sure that all the cables are labeled and are in the correct position that they are terminated at. If not, ensure to mark or label before starting any removal.</li> <li>Disconnect the Console and Ethernet cables from Telco switch being replaced. Leave the cables dangling.</li> <li>(Optional) If cable management tie-rod is mounted to the switch being replaced, it may be necessary to cut or remove the cable-ties, holding the cables from the Tie-rod.</li> </ol>

		
<p>4. □</p>	<p>Remove the Switch being replaced</p>	<p><b>Tools required:</b> Ground Strap and #3 Phillips Screwdriver</p> <ol style="list-style-type: none"> <li>Remove the four (4) PAN head screws (Two (2) on either side of the switch). If there is no support under the switch, take care to support the switch while removing the screws.</li> <li>Remove the Switch from the Eagle rack.</li> <li>Keep the screws safely set aside. Required for mounting the new switch.</li> </ol> <p>Note: If Tie-rod is attached via the screws being removed, then the Tie-rod needs to be set aside for reattachment when the replacement Switch is installed.</p> 
<p>5. □</p>	<p>Assemble the replacement Cisco Switch</p>	<p><b>Tools required:</b> Ground Straps and #2 Phillips Screwdriver</p> <p>Attach the mounting brackets with Cisco switch assembly.</p> <ol style="list-style-type: none"> <li>Locate the supplied mounting brackets and screws from the Switch package.</li> </ol>



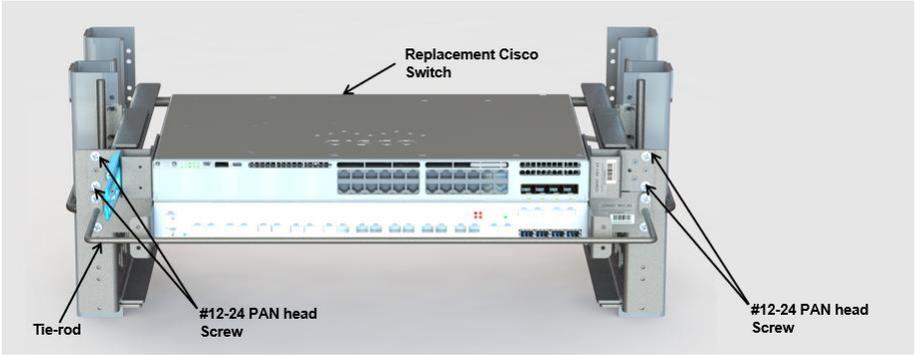
- b. Align the mounting bracket to the switch using four mounting holes.

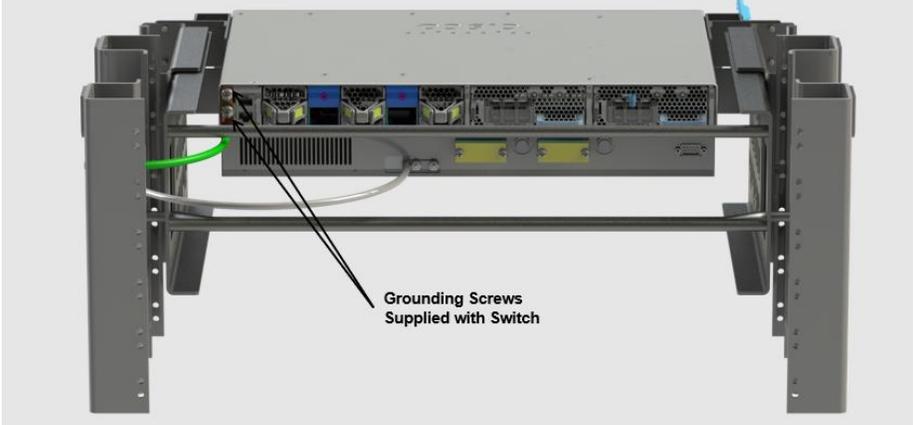
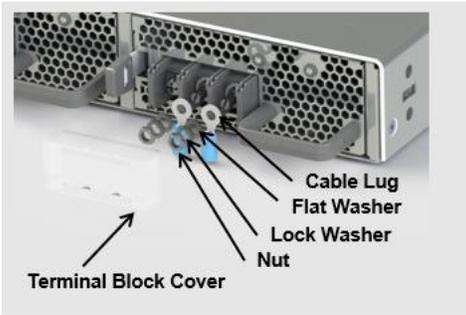
Note: Bracket with labels to be mounted on the right side of the switch.

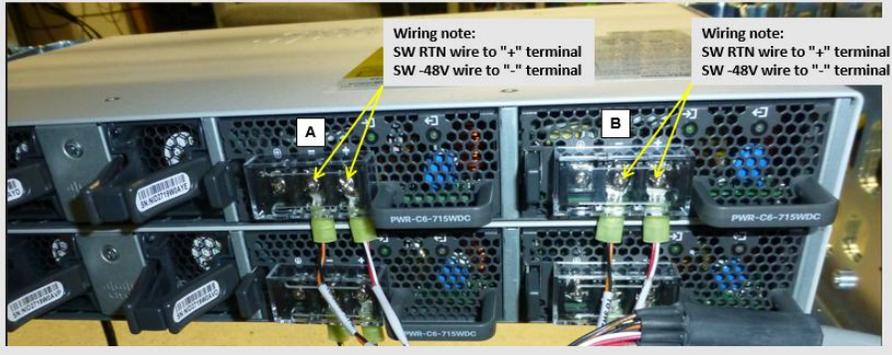
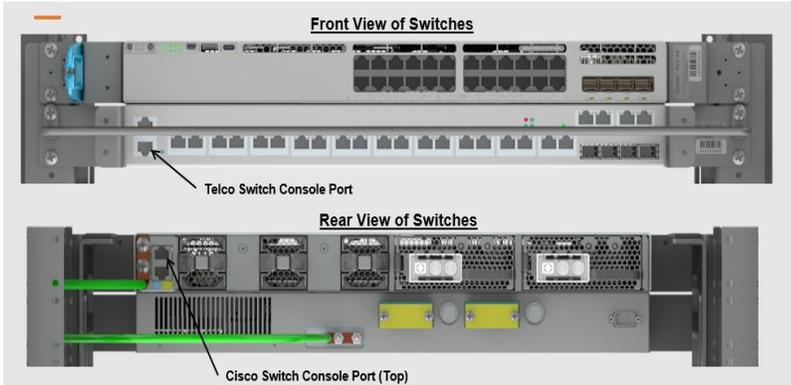
- c. Insert four screws, supplied with each switch, and tighten.



- d. Repeat the steps b and c for the other side of the switch.
- e. Attach optional Cable Manager.
  - I. Locate Cable Manager and Screw from replacement Switch packaging.
  - II. Attach the Cable Manager to the rack mounting bracket using the supplied screw.

		 <p>Cable manager Cable manager Mounting screw</p>
<p>6. <input type="checkbox"/></p>	<p>Install Replacement Cisco Switch</p>	<p><b>Tools required:</b> Ground Straps and #3 Phillips Screwdriver</p> <ol style="list-style-type: none"> <li>a. Align Replacement Cisco Switch in the slot where the original switch was removed.</li> </ol>  <p>Replacement Cisco Switch Tie-rod #12-24 PAN head Screw #12-24 PAN head Screw</p> <ol style="list-style-type: none"> <li>b. Using screws removed from step 4, insert the four (4) PAN head screws (Two (2) on either side of the switch) and tighten.</li> </ol> <p>Note: If Tie-rod was removed in step 4, reattach at this time.</p>
<p>7. <input type="checkbox"/></p>	<p>Reattach the ground cable</p>	<p><b>Tools required:</b> Ground Straps and #2 Phillips Screwdriver</p> <p>Reattach the chassis ground wire (from Step 3) to switch where shown. Use Screws provided with replacement Cisco Switch.</p>

		 <p>In Replacement Switch Container, locate grounding screw packet with PN 48-2381-01.</p> 
<p>8. <input type="checkbox"/></p>	<p>Connect power to the replacement Cisco Switch</p>	<p><b>Tools required:</b> Ground Strap and 1/4" Nut Driver</p> <ol style="list-style-type: none"> <li>a. Remove terminal block cover.</li> </ol>  <ol style="list-style-type: none"> <li>b. Remove Nuts and Washers from studs on A feed terminal block.</li> <li>c. Install the lugs from the power cable (A) to switch terminal block A.</li> <li>d. Secure the nuts after inserting flat washer and lock washer on top of the cable lug.</li> <li>e. Ensure connections to terminal block are as follows: <u>SW RTN wire to "+" terminal</u>, <u>SW -48V wire to "-" terminal</u>.</li> </ol>

		 <p>f. Reattach protective cover.</p> <p>g. Repeat the above steps for the B feed connection.</p>
<p>9. <input type="checkbox"/></p>	<p>Reattach Console Cable and Ethernet Cables</p>	<p><b>Tools required:</b> Ground Strap</p> <p>a. Plug-in the console port cable to the Replacement Switch.</p>  <p>Note: The Console port on the New Cisco Switch is on the rear side where the power is applied.</p> <p>b. Plug-in the Ethernet cables to Replacement Cisco Switch.</p> <p>Note: The Switch locations are marked on cable from Step 3.</p>
<p>10. <input type="checkbox"/></p>	<p>Reapply power</p>	<p>a. Double check all the connections are in their proper place and are secure.</p> <p>b. Reinstall the A and B feed power fuses (removed in Step 1) one at a time.</p> <p>c. Check the switch power supply LED to ensure power is up. Then, install the other fuse and again check power supply LED.</p> 

		The replacement switch is now ready to be set up and configured.
11. <input type="checkbox"/>	Configure the new Cisco Switch	Refer to the following procedure “Switch Configuration” to configure the new Cisco Switch.

**A.2 SWITCH CONFIGURATION**

STEP #	<p>This procedure configures the Cisco Switches on an installed E5-APP-B ELAP server pair.</p> <p>Check off (√) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>IF THIS PROCEDURE FAILS, CONTACT MY ORACLE SUPPORT AND ASK FOR ASSISTANCE.</p>	
1.	<p>Make the cross-over cable connections.</p>	<p style="text-align: center;"><b>NOTE: THIS IS IMPORTANT</b></p> <p>CONNECT the cross-over cable from <b>Port 1</b> of <b>Switch1A</b> to <b>Port 1</b> of <b>Switch1B</b>.</p> <p>DISCONNECT the cross-over cable from <b>Port 2</b> of <b>Switch1A</b> to <b>Port 2</b> of <b>Switch1B</b>.</p> <p>Note:</p> <ul style="list-style-type: none"> <li>• The switch configuration should only be attempted by a skilled technician and not by all.</li> <li>• All uplinks should be removed while switch configuration.</li> <li>• There should not be any loop in the switches during their configuration.</li> <li>• Switch1B must be configured first.</li> </ul>
2.	<p>Do minicom to enter the Cisco switch console. Run the command “minicom switch1A” for the console cable connected to MPS-A, and for console cable connected to MPS-B use “minicom switch1B”.</p>	<pre>[root@Arica-A elapall]# [root@Arica-A elapall]# minicom switch1B</pre>
3.	<p><input type="checkbox"/> <b>MPS X:</b> Do not enter in the initial config dialog in the freshly connected Cisco switch.</p>	<p style="text-align: center;"><b>Autoinstall will terminate if any input is detected on console</b></p> <p style="text-align: center;">--- System Configuration Dialog ---</p> <p style="text-align: center;"><b>Would you like to enter the initial configuration dialog? [yes/no]:no</b></p>
4.	<p><input type="checkbox"/> <b>MPS X:</b> Enter an Enable secret key :- “OracleSwitchC1”</p>	<p>The enable secret is a password used to protect access to privileged EXEC and configuration modes. This password, after entered, becomes encrypted in the configuration.</p> <p>-----</p> <p>Secret should be of minimum 10 characters and maximum 32 characters with at least 1 uppercase, 1 lowercase, 1 digit, and should not contain [cisco].</p> <p>-----</p> <p><b>Enter enable secret:OracleSwitchC1</b>  <b>Confirm enable secret: OracleSwitchC1</b></p>
5.	<p><input type="checkbox"/> <b>MPS X:</b> Press 2 and enter</p>	<p>The following configuration command script was created:</p> <pre>enable secret 9 \$9\$TsbinkhqCyICKE\$.kVhRy3IJTaqJEb.T9yJjjmzCRSu426mSi rX4U3a1k ! end</pre> <p>Go to the IOS command prompt without saving this config.  Return to the setup without saving this config.  Save this configuration to nvram and exit.</p>

		Enter your selection [2]: 2
6. <input type="checkbox"/>	<b>MPS X:</b> Initial configuration building done.	<p style="text-align: center;">Building configuration... [OK]</p> <p style="text-align: center;">Use the enabled mode 'configure' command to modify this configuration.</p> <p style="text-align: center;">Press RETURN to get started!</p>
7. <input type="checkbox"/>	<b>MPS X:</b> Write “enable” and password set in step 3 which is “OracleSwitchC1”	<pre>Switch&gt;enable Password:</pre>
8. <input type="checkbox"/>	<b>MPS X:</b> Once the switch is enabled to take configuration > sign changes to the # sign	<pre>Switch&gt;enable Password: Password: Switch#</pre>
9. <input type="checkbox"/>	<b>MPS X:</b> Write command – “Configure terminal”	<pre>switch# configure terminal</pre> <p>Enter configuration commands, one per line. End with CNTL/Z.</p> <pre>switch(config)#</pre>
10. <input type="checkbox"/>	<b>MPS X:</b> Here are the attached configs to be used for ELAP.	  Cisco1AElap.txt      Cisco1BElap.txt
11. <input type="checkbox"/>	<b>MPS X:</b> Open the attached config in notepad for the switch you want to configure.	Open in notepad and press Ctrl+A and then Ctrl+C.
12. <input type="checkbox"/>	<b>MPS X:</b> Paste all the copied config to the switch. The shown example is for Switch1A.	<pre>Switch# configure terminal Enter configuration commands, one per line. End with CNTL/Z. Switch(config)#hostname switch1A switch1A(config)#enable secret EnABLe switch1A(config)# switch1A(config)#\$estamps log datetime msec localtime show- timezone switch1A(config)#no service pad</pre>

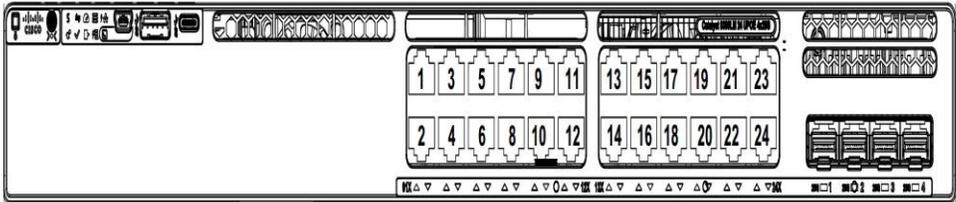
		<pre> switch1A(config)#service timestamps debug uptime switch1A(config)#service timestamps log uptime switch1A(config)#service password-encryption switch1A(config)#no logging console switch1A(config)#logging on switch1A(config)#logging trap errors switch1A(config)#logging facility local6 switch1A(config)#line console 0 switch1A(config-line)#length 0 switch1A(config-line)#exit switch1A(config)# switch1A(config)#clock timezone gmt-5 -5 00 switch1A(config)# switch1A(config)# switch1A(config)#vlan 1 switch1A(config-vlan)# name default switch1A(config-vlan)# exit switch1A(config)# switch1A(config)#vlan 2 switch1A(config-vlan)# name dsm-a switch1A(config-vlan)# exit switch1A(config)#interface vlan 1 switch1A(config-if)#ip address 169.254.1.1 255.255.255.0 switch1A(config-if)#no shutdown switch1A(config-if)#exit switch1A(config)# switch1A(config)#interface gigabitEthernet1/0/1 switch1A(config-if)# switchport mode trunk switch1A(config-if)#switchport trunk allowed vlan add 1 switch1A(config-if)#switchport trunk allowed vlan add 2 switch1A(config-if)# channel-group 1 mode on Creating a port-channel interface Port-channel 1  switch1A(config-if)# description Link_to_Switch B switch1A(config-if)#shutdown switch1A(config-if)#no shutdown switch1A(config-if)# switch1A(config-if)#interface gigabitEthernet1/0/2 switch1A(config-if)# switchport mode trunk switch1A(config-if)#switchport trunk allowed vlan add 1 switch1A(config-if)#switchport trunk allowed vlan add 2 </pre>
--	--	---

	<pre>switch1A(config-if)# channel-group 1 mode on switch1A(config-if)# description Link_to_Switch B switch1A(config-if)#shutdown switch1A(config-if)#no shutdown switch1A(config-if)# switch1A(config-if)#interface gigabitEthernet1/0/3 switch1A(config-if)# switchport mode access switch1A(config-if)# switchport access vlan 2 switch1A(config-if)# description ELAP_A DSM A switch1A(config-if)#shutdown switch1A(config-if)#no shutdown switch1A(config-if)# switch1A(config-if)#interface gigabitEthernet1/0/4 switch1A(config-if)# switchport mode access switch1A(config-if)# switchport access vlan 2 switch1A(config-if)# description ELAP_B DSM A switch1A(config-if)#shutdown switch1A(config-if)#no shutdown switch1A(config-if)# switch1A(config-if)#interface gigabitEthernet1/0/5 switch1A(config-if)# switchport mode trunk switch1A(config-if)#switchport trunk allowed vlan add 1 switch1A(config-if)#switchport trunk allowed vlan add 2 switch1A(config-if)# description ELAP_A SYNC switch1A(config-if)#shutdown switch1A(config-if)#no shutdown switch1A(config-if)# switch1A(config-if)#interface gigabitEthernet1/0/6 switch1A(config-if)# switchport mode trunk switch1A(config-if)#switchport trunk allowed vlan add 1 switch1A(config-if)#switchport trunk allowed vlan add 2 switch1A(config-if)# description ELAP_B SYNC switch1A(config-if)#shutdown switch1A(config-if)#no shutdown switch1A(config-if)# switch1A(config-if)#interface gigabitEthernet1/0/7 switch1A(config-if)# switchport mode access switch1A(config-if)# switchport access vlan 2 switch1A(config-if)# description EAGLE_A_Ports switch1A(config-if)#shutdown switch1A(config-if)#no shutdown</pre>
--	--

	<pre>switch1A(config-if)# switch1A(config-if)#interface gigabitEthernet1/0/8 switch1A(config-if)# switchport mode access switch1A(config-if)# switchport access vlan 2 switch1A(config-if)# description EAGLE_A_Ports switch1A(config-if)#shutdown switch1A(config-if)#no shutdown switch1A(config-if)# switch1A(config-if)#interface gigabitEthernet1/0/9 switch1A(config-if)# switchport mode access switch1A(config-if)# switchport access vlan 2 switch1A(config-if)# description EAGLE_A_Ports switch1A(config-if)#shutdown switch1A(config-if)#no shutdown switch1A(config-if)# switch1A(config-if)#interface gigabitEthernet1/0/10 switch1A(config-if)# switchport mode access switch1A(config-if)# switchport access vlan 2 switch1A(config-if)# description EAGLE_A_Ports switch1A(config-if)#shutdown switch1A(config-if)#no shutdown switch1A(config-if)# switch1A(config-if)#interface gigabitEthernet1/0/11 switch1A(config-if)# switchport mode access switch1A(config-if)# switchport access vlan 2 switch1A(config-if)# description EAGLE_A_Ports switch1A(config-if)#shutdown switch1A(config-if)#no shutdown switch1A(config-if)# switch1A(config-if)#interface gigabitEthernet1/0/12 switch1A(config-if)# switchport mode access switch1A(config-if)# switchport access vlan 2 switch1A(config-if)# description EAGLE_A_Ports switch1A(config-if)#shutdown switch1A(config-if)#no shutdown switch1A(config-if)# switch1A(config-if)#interface gigabitEthernet1/0/13 switch1A(config-if)# switchport mode access switch1A(config-if)# switchport access vlan 2 switch1A(config-if)# description EAGLE_A_Ports switch1A(config-if)#shutdown</pre>
--	--

	<pre>switch1A(config-if)#no shutdown switch1A(config-if)# switch1A(config-if)#interface gigabitEthernet1/0/14 switch1A(config-if)# switchport mode access switch1A(config-if)# switchport access vlan 2 switch1A(config-if)# description EAGLE_A_Ports switch1A(config-if)#shutdown switch1A(config-if)#no shutdown switch1A(config-if)# switch1A(config-if)#interface gigabitEthernet1/0/15 switch1A(config-if)# switchport mode access switch1A(config-if)# switchport access vlan 2 switch1A(config-if)# description EAGLE_A_Ports switch1A(config-if)#shutdown switch1A(config-if)#no shutdown switch1A(config-if)# switch1A(config-if)#interface gigabitEthernet1/0/16 switch1A(config-if)# switchport mode access switch1A(config-if)# switchport access vlan 2 switch1A(config-if)# description EAGLE_A_Ports switch1A(config-if)#shutdown switch1A(config-if)#no shutdown switch1A(config-if)# switch1A(config-if)#interface gigabitEthernet1/0/17 switch1A(config-if)# switchport mode access switch1A(config-if)# switchport access vlan 2 switch1A(config-if)# description EAGLE_A_Ports switch1A(config-if)#shutdown switch1A(config-if)#no shutdown switch1A(config-if)# switch1A(config-if)#interface gigabitEthernet1/0/18 switch1A(config-if)# switchport mode access switch1A(config-if)# switchport access vlan 2 switch1A(config-if)# description EAGLE_A_Ports switch1A(config-if)#shutdown switch1A(config-if)#no shutdown switch1A(config-if)# switch1A(config-if)#interface gigabitEthernet1/0/19 switch1A(config-if)# switchport mode access switch1A(config-if)# switchport access vlan 2 switch1A(config-if)# description EAGLE_A_Ports</pre>
--	---

		<pre> switch1A(config-if)#shutdown switch1A(config-if)#no shutdown switch1A(config-if)# switch1A(config-if)#interface gigabitEthernet1/0/20 switch1A(config-if)# switchport mode access switch1A(config-if)# switchport access vlan 2 switch1A(config-if)# description EAGLE_A_Ports switch1A(config-if)#shutdown switch1A(config-if)#no shutdown switch1A(config-if)# switch1A(config-if)#interface gigabitEthernet1/0/21 switch1A(config-if)# switchport mode access switch1A(config-if)# switchport access vlan 2 switch1A(config-if)# description EAGLE_A_Ports switch1A(config-if)#shutdown switch1A(config-if)#no shutdown switch1A(config-if)# switch1A(config-if)#interface gigabitEthernet1/0/22 switch1A(config-if)# switchport mode access switch1A(config-if)# switchport access vlan 2 switch1A(config-if)# description EAGLE_A_Ports switch1A(config-if)#shutdown switch1A(config-if)#no shutdown switch1A(config-if)# switch1A(config-if)#interface gigabitEthernet1/0/23 switch1A(config-if)# switchport mode access switch1A(config-if)# switchport access vlan 2 switch1A(config-if)# description EAGLE_A_Ports switch1A(config-if)#shutdown switch1A(config-if)#no shutdown switch1A(config-if)# switch1A(config-if)#interface gigabitEthernet1/0/24 switch1A(config-if)# switchport mode access switch1A(config-if)# switchport access vlan 2 switch1A(config-if)# description EAGLE_A_Ports switch1A(config-if)#shutdown switch1A(config-if)#no shutdown switch1A(config-if)# switch1A(config-if)# switch1A(config-if)#no ip http server switch1A(config)# </pre>
--	--	--

		<pre> switch1A(config)#no cdp run switch1A(config)# switch1A(config)#line con 0 switch1A(config-line)# password &lt;switch console password&gt; switch1A(config-line)# login switch1A(config-line)#line vty 0 4 switch1A(config-line)#transport input telnet ssh switch1A(config-line)#password &lt;switch console password&gt; switch1A(config-line)# login switch1A(config-line)#line vty 5 15 switch1A(config-line)#transport input telnet ssh switch1A(config-line)#password &lt;switch console password&gt; switch1A(config-line)# login switch1A(config-line)# switch1A(config-line)# switch1A(config-line)#ntp server 169.254.1.100 switch1A(config)# switch1A(config)#logging host 169.254.1.100 switch1A(config)# switch1A(config)#end switch1A#                     </pre>
<p>13. <input type="checkbox"/></p>	<p><b>MPS X:</b> Similarly, you need to configure all other connected Cisco switches.</p>	<p>Use the config attached in step 10 and repeat steps 2 to 12. Note: Make sure to select the exact same config from the step 10 as per the switch location.</p>
<p>14. <input type="checkbox"/></p>	<p>Connect the cross-over cable from <b>Port 2 of Switch1A</b> to <b>Port 2 of Switch1B</b>.</p>	
<p>15.</p>	<p>Ping to confirm connectivity.  Note: IP address 169.254.1.1 associated with Switch1A and IP address 169.254.1.2 associated with Switch1B.</p>	<p>Ping from all the newly connected switches to the mentioned IP address, whichever is connected (169.254.1.1, 169.254.1.12, 169.254.1.100, 169.254.1.200), until you see a 100% success rate.</p> <pre> switch1A#ping 169.254.1.1 Type escape sequence to abort. Sending 5, 100-byte ICMP Echos to 169.254.1.1, timeout is 2 seconds: !!!! Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms switch1A#ping 169.254.1.2 Type escape sequence to abort. Sending 5, 100-byte ICMP Echos to 169.254.1.2, timeout is 2 seconds: !!!!                     </pre>

		<p>Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms switch1A#ping 169.254.1.100 Type escape sequence to abort. Sending 5, 100-byte ICMP Echos to 169.254.1.100, timeout is 2 seconds: !!!! Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms switch1A#ping 169.254.1.200 Type escape sequence to abort. Sending 5, 100-byte ICMP Echos to 169.254.1.200, timeout is 2 seconds: !!!! Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms</p>
16. <input type="checkbox"/>	Procedure complete	Procedure is complete.

## APPENDIX B. ISO IMAGE COPY FROM USB MEDIA

Assumption: The USB media contains the desired ELAP ISO.

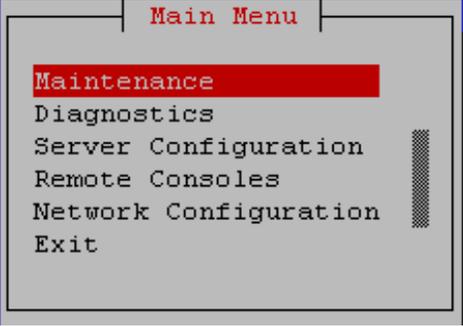
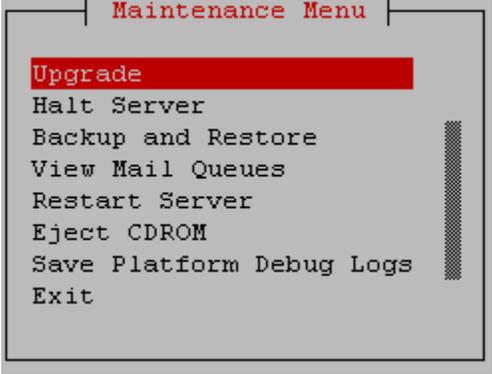
<b>S T E P #</b>	<p>This procedure provides instructions to copy an ISO image from an USB media.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>IF THIS PROCEDURE FAILS, CONTACT ORACLE TECHNICAL SERVICES AND ASK FOR UPGRADE ASSISTANCE.</p>	
1. <input type="checkbox"/>	<b>MPS X:</b> Insert USB.	Insert media in USB drive
2. <input type="checkbox"/>	<b>MPS X:</b> Log in to the server as the “admusr” user.	<code>[hostname] console login: admusr</code> <code>password: &lt;admusr_password&gt;</code>
3. <input type="checkbox"/>	<b>MPS X:</b> Run syscheck to make sure there is no error.	<p>Execute the following command: <b># syscheck</b></p> <p>The output should look like: [root@hostname ~]# syscheck Running modules in class proc... OK Running modules in class services... OK Running modules in class system... OK Running modules in class disk... OK Running modules in class hardware... OK Running modules in class net... OK LOG LOCATION: /var/TKLC/log/syscheck/fail_log</p>
4. <input type="checkbox"/>	<b>MPS X:</b> Verify ISO image doesn't already exist.	<p>Execute the following command to perform directory listing: <b># ls -al /var/TKLC/upgrade</b></p> <p>The output should look like: [root@hostname ~]# ls -al /var/TKLC/upgrade total 16 dr-xr-xr-x 2 root root 4096 Oct 22 16:31 . dr-xr-xr-x 21 root root 4096 Oct 18 13:40 ..</p> <p>If an ISO image exists, remove it by executing the following command: <b># rm -f /var/TKLC/upgrade/&lt;ISO image&gt;</b></p>
5. <input type="checkbox"/>	<b>MPS X:</b> Delete unwanted ISOs from USB media.	<p>Execute the following command to create a directory to mount the USB media: <b># sudo mkdir -p /mnt/usb</b></p> <p>Execute the following command to get the USB drive name: <b># sudo fdisk -l  grep FAT</b></p> <p>The output should look like: <code>/dev/sdc1 * 1 812 831472 6 FAT16</code></p> <p>Execute the following command to mount the USB media using the USB drive name from the output above: <b># sudo mount /dev/sdc1 /mnt/usb</b></p> <p>Execute the following command to perform directory listing and verify the file name format is as expected: <b># sudo ls -al /mnt/usb</b></p>

		<p>The output should look like:</p> <pre>[root@hostname ~]# # ls -al /mnt/usb total 629400 dr-xr-xr-x 2 root root      4096 Oct 16 13:33 . dr-xr-xr-x 22 root root     4096 Oct 16 13:55 .. -rw-r--r-- 1 root root 643852288 Oct 15 15:37 ELAP-11.0.0.0.0_110.3.0-x86_64.iso</pre> <p>Only one ISO file should be listed, if additional files are listed, execute the following command to remove unwanted ELAP ISOs:</p> <pre># sudo rm -f /mnt/usb/&lt;ISO_NAME&gt;.iso</pre> <p>For e.g.,</p> <pre># sudo rm -f /mnt/usb/ELAP-11.0.0.0.0_110.3.0-x86_64.iso</pre> <p>Execute the following command to unmount the USB media:</p> <pre># sudo umount /mnt/usb</pre>
6.	<p><b>MPS X:</b> Verify space exists for ISO.</p> <input type="checkbox"/>	<p>Execute the following command to verify the available disk space:</p> <pre># df -h /var/TKLC</pre> <p>The output should look like:</p> <pre>[root@hostname ~]# df -h /var/TKLC Filesystem      Size  Used Avail Use% Mounted on /dev/md8        4.0G   89M  3.7G   3% /var/TKLC</pre> <p>Verify that there is at least 620M in the Avail column. If not, clean up files until there is space available.</p> <p><b>CAUTION:</b> Make sure you know what files you can remove safely before cleaning up. It is recommended that you only clean up files in the /var/TKLC/upgrade directory as this is a platform owned directory that should only contain ISO images. This directory should not be expected to contain images for any length of time as they can get purged. Contact Technical Services beforehand if removing files other than the /var/TKLC/upgrade directory as removing files is dangerous.</p>
7.	<p><b>MPS X:</b> Copy iso from mounted path to the destination path.</p> <input type="checkbox"/>	<p>Execute the following command to copy ISO:</p> <pre>\$ sudo cp /mnt/usb/&lt;xyz.iso&gt; /var/TKLC/upgrade/</pre>
8.	<p><b>MPS X:</b> Verify ISO image exists.</p> <input type="checkbox"/>	<p>Execute the following command to perform directory listing:</p> <pre># ls -al /var/TKLC/upgrade</pre> <p>The output should look like:</p> <pre>[root@hostname ~]# ls -al /var/TKLC/upgrade total 16 dr-xr-xr-x  2 root root 4096 Oct 22 16:31 . dr-xr-xr-x 21 root root 4096 Oct 18 13:40 .. -rw-r--r--  1 root root 643852288 Oct 15 15:37 ELAP-11.0.0.0.0_110.3.0-x86_64.iso</pre> <p>Repeat this procedure from step 5 if ELAP ISO file is not as expected.</p>
9.	<p><b>MPS X:</b> Unmount media and Logout from server.</p> <input type="checkbox"/>	<p>Execute the following command to unmount the USB media once iso copy is complete:</p> <pre>\$ sudo umount /mnt/usb</pre> <p>Logout from the server by executing the following command:</p> <pre># logout</pre>

10. <input type="checkbox"/>	<b>MPS X:</b> Remove USB media.	Remove media from USB drive.
---------------------------------	---------------------------------	------------------------------

**This procedure is complete!**

**APPENDIX C. VALIDATE ISO IMAGE**

<p><b>S T E P #</b></p>	<p>This procedure provides instructions to copy an ISO image from an USB media.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>IF THIS PROCEDURE FAILS, CONTACT ORACLE TECHNICAL SERVICES AND ASK FOR UPGRADE ASSISTANCE.</p>	
<p>1. <input type="checkbox"/></p>	<p><b>MPS X:</b> Log in to the server as the “root” user.</p>	<p><b>[hostname] console</b>  <b>login: root</b>  <b>password: password</b></p>
<p>2. <input type="checkbox"/></p>	<p><b>MPS X:</b> Start platcfg utility by logging in as user “platcfg”.</p>	<p>Execute the following command to change the user:  <b># su - platcfg</b></p>
<p>3. <input type="checkbox"/></p>	<p><b>MPS X:</b> Select the Maintenance submenu.</p>	<p>On the Main Menu of the Platform Configuration Utility, select <b>Maintenance</b> and press <b>[ENTER]</b>.</p> 
<p>4. <input type="checkbox"/></p>	<p><b>MPS X:</b> Select the Upgrade submenu.</p>	<p>Select the <b>Upgrade menu</b> and press <b>[ENTER]</b>.</p> 
<p>5. <input type="checkbox"/></p>	<p><b>MPS X:</b> Select Validate Media submenu.</p>	<p>Select the validate media menu and press <b>[ENTER]</b>.</p>



**APPENDIX D. DISCONNECT NPAC FROM LSMS**

<b>S T E P #</b>	This procedure disconnects NPAC from E5APPB LSMS. Estimated time: 5 minutes	
1. <input type="checkbox"/>	<b>LSMS Active server:</b> Log in to the server as the user "lsmsadm".	Login: <code>lsmsadm</code> Password: <code>&lt;lsmsadm_password&gt;</code>
2. <input type="checkbox"/>	<b>LSMS Active server:</b> Stop all connected NPAC regions	Execute the following command to list the active NPAC regions <pre>\$ dbnames -n all -a Canada CanadaDB MidAtlantic MidAtlanticDB Midwest MidwestDB Northeast NortheastDB Southeast SoutheastDB Southwest SouthwestDB WestCoast WestCoastDB Western WesternDB</pre> Note: The above output shall vary depending on LSMS configuration.  Execute the following command to stop an NPAC region. <pre>\$ lsms stop &lt;region name&gt;</pre> Checking if npacagent is running....Yes.  Stopping npacagent.... OK.  npacagent stopped: Wed Jan 2 05:52:42 2014  Command complete.  Execute the above command for all active regions.

**This procedure is complete!**

## APPENDIX E. CONNECT NPAC TO LSMS

<b>S T E P #</b>	This procedure connects NPAC to E5APPB LSMS. Estimated time: 5 minutes	
1.	<b>LSMS Active server:</b> <input type="checkbox"/> Log in to the server as the user "lsmsadm".	Login: <code>lsmsadm</code> Password: <code>&lt;lsmsadm_password&gt;</code>
2.	<b>LSMS Active server:</b> <input type="checkbox"/> Start all NPAC regions	<pre> Execute the following command to list the NPAC regions \$ dbnames -n all -a Canada CanadaDB MidAtlantic MidAtlanticDB Midwest MidwestDB Northeast NortheastDB Southeast SoutheastDB Southwest SouthwestDB WestCoast WestCoastDB Western WesternDB Note: The above output shall vary depending on LSMS configuration.  Execute the following command to start an NPAC region. \$ lsms start &lt;region name&gt;  Checking if npacagent is already running....No Starting npacagent.... Verifying....OK. npacagent started: Thu Jul 13 05:18:35 2017  Command complete. Execute the above command for all NPAC regions.                 </pre>

**This procedure is complete!**



## APPENDIX F. REMOVE ACCEPT UPGRADE FAILURE ALARM

<b>S T E P #</b>	This procedure is used to remove the false message of accept upgrade failure, when accept upgrade fails but disk redundancy is restored. Estimated time: 5 minutes	
1. <input type="checkbox"/>	<b>MPS X:</b> Log in to the server as the user "root".	Login: <b>root</b> Password: <b>&lt;root_password&gt;</b>
2. <input type="checkbox"/>	<b>MPS X:</b> Blankout the /etc/motd file.	Blankout the /etc/motd file <b># &gt;/etc/motd</b>
3. <input type="checkbox"/>	<b>MPS X:</b> Add an entry "export POST_UPGRADE_ACTION=done" in the upgrade configuration file.	Add an entry "export POST_UPGRADE_ACTION=done" in the upgrade configuration file. <b>/var/TKLC/log/upgrade/upgrade.conf</b>
4. <input type="checkbox"/>	<b>MPS X :</b> Clear the alarm manually.	Clear the false alarm "TKSPLATMI33". Following alarm is seen in alarmStatus.  alarmMgr --alarmStatus SEQ: 7 UPTIME: 356 BIRTH: 1524100682 TYPE: SET ALARM: TKSPLATMI33 tpdServerUpgradePendingAccept 1.3.6.1.4.1.323.5 .3.18.3.1.3.33 32532 Processing Error Configuration Error  To clear the alarm, run the following command:  <b># alarmMgr --clear TKSPLATMI33</b>

**This procedure is complete!**

**APPENDIX G. MY ORACLE SUPPORT**

**CAUTION:** Use only the guide downloaded from the Oracle Technology Network (OTN) (<http://www.oracle.com/technetwork/indexes/documentation/oracle-comms-tekelec-2136003.html>).

Before upgrading your system, access the **My Oracle Support** web portal (<https://support.oracle.com>) and review any Knowledge Alerts that may be related to the System Health Check or the Upgrade.

Before beginning this procedure, contact My Oracle Support and inform them of your upgrade plans. **If installing for an Oracle customer on a customer site, obtain the customer's Support Identifier (SI) before requesting assistance.**

**Web portal (preferred option):** My Oracle Support (MOS) (<https://support.oracle.com/>)

**Phone:** Contact your local Oracle Global Customer Support Center (<http://www.oracle.com/support/contact.html>)

Make the following selections on the Support telephone menu:

1. Select '2' for New Service Request
2. Select '3' for Hardware, Networking and Solaris Operating System Support
3. Select '1' for Technical Issues and when talking to the agent, please indicate that you are an existing Tekelec customer