

Oracle® Database

Diameter Signaling Router Diameter SDS Software Upgrade Guide



Release 9.3.0.0.0

G56163-01

May 2026

ORACLE®

Copyright © 2000, 2026, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

1	Introduction	
1.1	Acronyms and Terminology	1
1.2	References	3
1.3	Activity Logging	3
1.4	Use of Health Checks	3
1.5	Large Installation Support	3
1.6	Warnings, Cautions, and Notes	3
2	General Description	
2.1	SDS Supported Upgrade Paths	1
3	Upgrade Overview	
3.1	Upgrade Requirements	1
3.1.1	ISO Image File	2
3.1.2	Logins, Passwords, and Site Information	2
3.2	MySQL User Accounts Password	3
3.2.1	Sanity Check on MySQL Passwords	5
3.3	Upgrade Maintenance Windows	5
3.4	Upgrade Preparation Overview	6
3.5	Primary SDS Site or DR SDS Site Upgrade Execution Overview	7
3.6	SOAM Upgrade Execution Overview	8
3.7	Post Upgrade Execution Overview	8
3.8	Recovery Procedures Overview	8
4	SDS Upgrade Matrix	
5	Upgrade Preparation	
5.1	Requirements Check	1
5.2	Review Release Notes	1
5.3	Perform Health Check (Upgrade Preparation)	1

5.4	ISO Administration	2
5.5	Back Up TKLCCConfigData File	6
5.6	Perform Health Check (Post ISO Administration)	7
5.7	Full Database Back up (PROV and COMCOL ENV for All Servers)	7

6 Automated Site Upgrade

6.1	Site Upgrade Execution	1
6.2	Minimum Server Availability	5
6.3	Site Upgrade Options	6
6.4	Cancel and Restart Auto Site Upgrade	7

7 Automated Server Group Upgrade

7.1	Cancel and Restart Automated Server Group Upgrade	1
7.2	Site Accept	2

8 Primary or DR SDS NOAM Upgrade Execution

8.1	Perform Health Check (Primary or DR NOAM Pre- upgrade)	2
8.2	Upgrade DR SDS NOAM	10
8.3	Perform Health Check (Primary or DR NOAM Post Upgrade)	12
8.4	SNMP Configuration Update (Post Primary or DR NOAM Upgrade)	12

9 Site Upgrade Execution

9.1	Automated Site Upgrade	1
9.1.1	Perform Health Check (Pre-Upgrade)	2
9.1.2	Upgrade SOAM	3
9.1.3	Rearrange Automate Site Upgrade Cycles	6
9.1.4	Perform Health Check (Post Upgrade)	8
9.2	SOAM Upgrade Execution (Manual and Automated Server Group)	8
9.2.1	Perform Health Check (SOAM Pre-Upgrade)	9
9.2.2	Upgrade SOAM	9
9.2.3	Perform Health Check (SOAM Post Upgrade)	12
9.3	Post Upgrade Procedures	12
9.3.1	Accept the Upgrade	12
9.3.2	SOAM VM Profile Update	14

10 Recovery Procedures

10.1	Backout Setup	1
10.2	Perform Backout	2

10.2.1	Back Out the SOAM	2
10.2.2	Back Out the DR SDS NOAM	5
10.2.3	Back Out the Primary SDS NOAM	6

A Access the OAM GUI Using the VIP (NOAM/SOAM)

A.1	Health Check Procedures	A-2
A.2	Upgrade Server Administration on SDS 9.0	A-14
A.3	Back Out a Single Server	A-19
A.4	Manually Perform ISO Validation	A-27
A.5	Undeploy an ISO File (Post Upgrade Acceptance)	A-30
A.6	Recover from a Failed Upgrade	A-32
A.7	Add New SOAM Profile on Existing VM	A-37
A.8	Remove the SDS SOAM VM from the SOAM Server Group	A-37
A.9	Recreate the SDS SOAM VM with the 1B Subscriber Profile	A-41
A.10	Place the SDS SOAM VM into the SOAM Server Group	A-41
A.11	Manual Completion of Server Upgrade	A-46
A.12	Workaround to Resolve Server HA Failover Issue	A-48
A.13	Workaround for SNMP Configuration	A-49
A.14	Workaround to Resolve Syscheck Error for CPU Failure	A-51
A.15	Workaround to Fix cmsoapa Restart	A-51
A.16	Workaround to Fix DNS Issue	A-52
A.17	Emergency Response	A-54
A.18	Locate Product Documentation on the Oracle Help Center	A-54
A.19	Restoring Custom MySQL User	A-54

B Dual Hop Upgrade from SDS-8.6.x to SDS-9.0.2 Using Ansible

B.1	Resizing all the Instances in the Setup	B-2
B.1.1	Resizing Instances if Setup is in KVM Environment	B-3
B.2	Extending the Partition	B-4
B.3	Setting up the Active NOAM as Controller	B-5
B.4	Upgrading Standby NOAM	B-7
B.5	Verifying Upgrade	B-7
B.6	Configuring Upgraded Standby NOAM	B-7
B.7	Setting up Active NOAM as Controller	B-8
B.8	Upgrading Other Servers	B-8

Preface

- [Documentation Accessibility](#)
- [Diversity and Inclusion](#)
- [Conventions](#)

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Access to Oracle Support

Oracle customer access to and use of Oracle support services will be pursuant to the terms and conditions specified in their Oracle order for the applicable services.

Diversity and Inclusion

Oracle is fully committed to diversity and inclusion. Oracle respects and values having a diverse workforce that increases thought leadership and innovation. As part of our initiative to build a more inclusive culture that positively impacts our employees, customers, and partners, we are working to remove insensitive terms from our products and documentation. We are also mindful of the necessity to maintain compatibility with our customers' existing technologies and the need to ensure continuity of service as Oracle's offerings and industry standards evolve. Because of these technical constraints, our effort to remove insensitive terms is ongoing and will take time and external cooperation.

Conventions

The following text conventions are used in this document:

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

My Oracle Support

My Oracle Support (<https://support.oracle.com>) is your initial point of contact for all product support and training needs. A representative at Customer Access Support can assist you with My Oracle Support registration.

Call the Customer Access Support main number at 1-800-223-1711 (toll-free in the US), or call the Oracle Support hotline for your local country from the list at <http://www.oracle.com/us/support/contact/index.html>. When calling, make the selections in the sequence shown below on the Support telephone menu:

1. Select **2** for New Service Request.
2. Select **3** for Hardware, Networking and Solaris Operating System Support.
3. Select one of the following options:
 - For Technical issues such as creating a new Service Request (SR), select **1**.
 - For Non-technical issues such as registration or assistance with My Oracle Support, select **2**.

You are connected to a live agent who can assist you with My Oracle Support registration and opening a support ticket.

My Oracle Support is available 24 hours a day, 7 days a week, 365 days a year.

Whats New in This Guide

This section introduces the documentation updates for Release 9.3.0.0.0.

Release 9.3.0.0.0 - G56163-01, May 2026

There are no updates for this release.

Acronyms and Terminology

Listed below is an alphabetized list of acronyms and terminologies used in the document:

Table Acronyms

Acronym	Meaning
CLI	Command Line Interface
CSV	Comma-separated Values
DP	Database Processor
DR	Disaster Recovery
GA	General Availability
GUI	Graphical User Interface
HA	High Availability
IMI	Internal Management Interface
IPM	Initial Product Manufacture
ISO	ISO 9660 file system
LA	Limited Availability
MOP	Method of Procedure
MP	Message Processing or Message Processor
NE	Network Element
NOAM	Network OAM
OAM&P	Operations, Administration, Maintenance and Provisioning
SDS	Subscriber Database Server
SOAM	System OAM
TPD	Tekelec Platform Distribution
UI	User Interface
VIP	Virtual IP
VPN	Virtual Private Network
XMI	External Management Interface
XSI	External Signaling Interface
DIU	Dual Image Upgrade

Table Terminology

Acronym	Definition
Upgrade	The process of converting an application from its current release on a system to a newer release.
Major upgrade	An upgrade from a current major release to a newer major release. An example of a major upgrade is SDS 8.6 to SDS 9.0.x
Incremental upgrade	An upgrade from a current build to a newer build within the same major release. An example of an incremental upgrade is SDS 9.x to 9.x
Software only upgrade	An upgrade that does not require a database schema change; only the software is changed.
Single server upgrade	The process of converting an SDS server from its current release on a single server to a newer release.

Table (Cont.) Terminology

Acronym	Definition
Back out	The process of reverting a single SDS server to a prior version. This could be performed due to failure in single server upgrade.
Rollback	Automatic recovery procedure that puts a server into its pre-upgrade status. This procedure occurs automatically during upgrade if there is a failure.
Source release	Software release to upgrade from.
Target release	Software release to upgrade to.
Upgrade ready	State that allows for graceful upgrade of a server without degradation of service. It is a state that a server is required to be in before it can be upgraded. The state is defined by the following attributes: • Server is forced standby • Server is application disabled (signaling servers do not process any traffic)

1

Introduction

This document describes methods used and procedures to perform an application software upgrade on in-service Subscriber Data Servers and Subscriber Data Servers Database Processor blades in an Subscriber Data Servers network. The supported upgrade paths are:

Note

From SDS 9.0.0.0.0 and later, consider ISO as DIU ISO in all occurrences, throughout this document.

8.6.x, 9.0, 9.0.1, 9.0.2 to 9.1

X = PI End Cycle

Y = Patches within the PI Cycle

The audience for this document includes Oracle customers and the Global Software Delivery SDS group.

This document provides instructions to run any SDS 8.6 software upgrade.

The SDS software includes all Tekelec Platform Distribution (TPD) software. Any TPD upgrade necessary is included automatically as part of the SDS software upgrade. The execution of this procedure assumes the SDS software load (ISO file, CD-ROM, or other form of media) has already been delivered to the customer's premises. This includes delivery of the software load to the local workstation being used to perform this upgrade.

Note

The distribution of the SDS software load is outside the scope of this procedure.

1.1 Acronyms and Terminology

Listed below is an alphabetized list of acronyms and terminologies used in the document:

Table 1-1 Acronyms

Acronym	Meaning
CLI	Command Line Interface
CSV	Comma-separated Values
DP	Database Processor

Table 1-1 (Cont.) Acronyms

Acronym	Meaning
DR	Disaster Recovery
GA	General Availability
GUI	Graphical User Interface
HA	High Availability
IMI	Internal Management Interface
IPM	Initial Product Manufacture
ISO	ISO 9660 file system
LA	Limited Availability
MOP	Method of Procedure
MP	Message Processing or Message Processor
NE	Network Element
NOAM	Network OAM
OAM&P	Operations, Administration, Maintenance and Provisioning
SDS	Subscriber Database Server
SOAM	System OAM
TPD	Tekelec Platform Distribution
UI	User Interface
VIP	Virtual IP
VPN	Virtual Private Network
XMI	External Management Interface
XSI	External Signaling Interface
DIU	Dual Image Upgrade

Table 1-2 Terminology

Acronym	Definition
Upgrade	The process of converting an application from its current release on a system to a newer release.
Major upgrade	An upgrade from a current major release to a newer major release. An example of a major upgrade is SDS 8.6 to SDS 9.0.x
Incremental upgrade	An upgrade from a current build to a newer build within the same major release. An example of an incremental upgrade is SDS 9.x to 9.x
Software only upgrade	An upgrade that does not require a database schema change; only the software is changed.
Single server upgrade	The process of converting an SDS server from its current release on a single server to a newer release.
Back out	The process of reverting a single SDS server to a prior version. This could be performed due to failure in single server upgrade.
Rollback	Automatic recovery procedure that puts a server into its pre-upgrade status. This procedure occurs automatically during upgrade if there is a failure.
Source release	Software release to upgrade from.
Target release	Software release to upgrade to.

Table 1-2 (Cont.) Terminology

Acronym	Definition
Upgrade ready	State that allows for graceful upgrade of a server without degradation of service. It is a state that a server is required to be in before it can be upgraded. The state is defined by the following attributes: • Server is forced standby • Server is application disabled (signaling servers do not process any traffic)

1.2 References

- *SDS Initial Installation and Configuration Guide.*
- *Database Management: Backup and System Restoration*
- *SDS Disaster Recovery Guide*
- *HP Solutions Firmware Upgrade Pack Release Notes, v2.1.5 (or latest 2.1 version)*
- *Platform 7.2 Configuration Guide*

1.3 Activity Logging

While connected to the system, log all the activity using a convention that notates the Customer Name, Site or Node location, Server Host name, and Date. Post upgrade provide all logs to Oracle for archiving.

1.4 Use of Health Checks

The user may run the [#unique_22/unique_22_Connect_42_GUID-8C8E13D3-8EA1-4275-8DF2-94BF4D450E98](#) procedure or View Logs steps freely or repeat as many times as desired in between procedures during the upgrade process. It is not recommended to do this in between steps within a procedure, unless there is a failure to troubleshoot.

1.5 Large Installation Support

For large systems containing multiple signaling network elements, it may not be feasible to apply the software upgrade to every network element within a single maintenance window; however, whenever possible, primary SDS site and DR SDS site network elements should be upgraded within the same maintenance window.

1.6 Warnings, Cautions, and Notes

This section presents notices of warnings and cautions that directly relate to the success of the upgrade. It is imperative that each of these notices be read and understood before continuing with the upgrade. If there are any conflicts, issues, or questions related to these notices, it is recommended to contact [#unique_15/unique_15_Connect_42_GUID-AAD93B71-B4B8-4F1C-83E5-16C9C91CC52E](#) before starting the upgrade.

Upgrade Check

In case of the following error comes up, contact [#unique_15/unique_15_Connect_42_GUID-AAD93B71-B4B8-4F1C-83E5-16C9C91CC52E](#).

"Post Upgrade validation failed for <server_name>. Please check server status. Canceling the upgrade."

Figure 1-1 Server Status

ID	Name	Status	Start Time	Update Time	Result	Result Details	Progress
25	Camaro-SD-8 Server Upgrade (in Camaro_SD_SD Server Group Upgrade)	completed	2018-06-22 07:07:28 EDT	2018-06-22 07:28:09 EDT	0	Server upgrade execution complete	100%
24	Nova-SD-5p Server Upgrade (in Camaro_SD_SD Server Group Upgrade)	exception	2018-06-22 07:07:12 EDT	2018-06-22 07:42:08 EDT	-1	Post Upgrade validation failed for Nova-SD-5p. Please check server status. Canceling the upgrade.	90%

Note

SDS Upgrade:
If the customer deployment has both the FABR and PCA features enabled, then upgrade the DSR nodes first before upgrading the SDS nodes.

2

General Description

This document defines the step-by-step actions performed to run a software upgrade of an in-service Subscriber Data Servers from the source release to the target release.

Note

Initial Installation is not within the scope of this upgrade document. See the SDS Initial Installation and Configuration Guide for more information.

2.1 SDS Supported Upgrade Paths

The following table provides information about the supported upgrade paths:

Table 2-1 SDS Upgrade Paths

Source Release	Target Release
9.0.1.0.0	9.1.0.0.0
9.0.2.0.0	9.1.0.0.0
9.0.2.1.0	9.1.0.0.0

3

Upgrade Overview

Note

If the upgrade is required from 8.6.x VM to 9.0.2, refer to [#unique_28/unique_28_Connect_42_GUID-DB7015DC-F864-4E7A-AD2F-D481B1C83DAD](#) section.

This section lists the required materials and information needed to run an upgrade. It also provides a brief timing overview of the activities needed to upgrade the source release software that is installed and running on an SDS server to the target release software. The approximate time required is outlined in sections [#unique_29/unique_29_Connect_42_GUID-CC33C3CE-220C-411E-BFDF-F33FCC1B781C](#) through [#unique_30/unique_30_Connect_42_GUID-54B28B88-0F59-4E23-BEDC-BF493C2C102A](#). These tables are used to plan and estimate the time necessary to complete the upgrade.

Timing values are estimates only. They estimate the completion time of a step or group of steps for an experienced user. These tables are not to be used to run procedures. Detailed steps for each procedure are provided in [#unique_31/unique_31_Connect_42_GUID-3D8C1400-DE52-4FCA-BFCC-1190E4A4B2F7](#).

3.1 Upgrade Requirements

Note

Any third party software that the customer has installed will be removed after an upgrade.

The following levels of access, materials, and information are needed to run an upgrade:

- Target-release DIU ISO image file
Example: SDS-9.1.0.0.0_100.17.0.iso
- VPN access to the customer's network
- GUI access to the SDS network OAM&P VIP with administrator's privileges
- SSH/SFTP access to the SDS network OAM&P XMI VIP as the admusr user.

Note

All logins into the SDS active and DR site servers are made using the external management (XMI) VIP unless otherwise stated.

Note

For a major upgrade, along with DIU ISO, the tar file and TPD OL7 DIU ISO is required.

- User logins, passwords, IP addresses, and other administration information. For more information, see the [#unique_33/unique_33_Connect_42_GUID-CCE8D7F5-9E19-4F82-B343-622722BDD7C3](#) section.
- Direct access to server IMI IP addresses from the user's local workstation is preferable in the case of a back out.

Note

If direct access to the IMI IP addresses is not available, then access to target server can be made using a tandem connection through the active primary SDS (that is, an SSH connection is made to the active primary SDS XMI first, then from the active primary SDS, an 2nd SSH connection can be made to the target server's IMI IP address).

3.1.1 ISO Image File

Obtain a copy of the target release ISO image file. This file is necessary to perform the upgrade. The SDS ISO image file name is in the following format:

For example: SDS-9.1.0.0.0_100.17.0-x86_64.iso

Note

Actual number values vary between releases.

Before executing this upgrade procedure, it is assumed the SDS ISO image file has already been delivered to the customer's system. The delivery of the ISO image requires the file be placed on the disk of a workstation with GUI access to the SDS XMI VIP. If the user performing the upgrade is at a remote location, it is assumed the ISO file is has already been transferred to the active primary SDS server before starting the upgrade procedure.

3.1.2 Logins, Passwords, and Site Information

Obtain all the information requested in the following table. This ensures the necessary administration information is available before an upgrade. Consider the confidential nature of the information recorded in this table. While all of the information in the table is required to complete the upgrade, there may be security policies in place that require secure disposal once the upgrade has been completed.

Table 3-1 Logins, Passwords, and Site Information

NE Type	NE Name
Primary SDS site	
DR SDS site	

Table 3-1 (Cont.) Logins, Passwords, and Site Information

NE Type	NE Name
SOAM 1 site	
SOAM 2 site	
SOAM 3 site	
SOAM 4 site	

Table 3-2 Software

Software	Value
Source release level	
Target release level	
Target release ISO filename	

Table 3-3 Access Information

Access Information	Value
Primary site XMI VIP (GUI)	
DR site XMI VIP	
SDS GUI admin user name and password	
SDS root user password	
SDS admusr user password	
SDS platcfg user password	
Blade's iLO admin username and password	
PMAC GUI admin username and password*	
PMAC user root password*	
PMAC user admusr password*	
PMAC user PMACftpusr password*	
On board administrator GUI admin user name and password	

3.2 MySQL User Accounts Password

This section provides the procedure to check for the presence of any forbidden special characters in the mysql passwords for **awadmin** and **root** user accounts.

MySQL password can contain the following:

- Upper case alphabets (A-Z)
- Lower case alphabets (a-z)
- Digits (0-9)
- 21 allowed special characters

Allowed Special Characters

There are a total of 32 special characters on the standard qwerty keyboard. Out of these 32 special characters, 21 characters are supported in the MySQL passwords.

The following table provides the list of these 21 allowed special characters.

Table 3-4 Allowed Special Characters

Allowed Special Characters	Name
#	Octothorpe or hash or pound sign
!	Exclamation point
~	Tilde
%	Percent
^	Caret or circumflex
*	Asterisk
_	Underscore
-	Hyphen or dash
+	Plus
=	Equal
?	Question Mark
{	Open Braces
}	Close Braces
(	Open Parenthesis
)	Close Parenthesis
<	Open angle bracket or less than
>	Close angle bracket or greater than
	Pipe or Vertical bar
.	Dot
,	Comma
;	Semi Colon

Forbidden Special Characters

There are a total of 32 special characters on the standard qwerty keyboard. Out of these 32 special characters, 11 characters are currently not supported in the MySQL passwords. Usage of these forbidden special characters in the password will set the incorrect password in the database of MySQL Server.

The following table provides the list of these 11 forbidden special characters.

Table 3-5 Forbidden Special Characters

Forbidden Special Characters	Name
@	Ampersat
\$	Dollar
&	Ampersand
`	Backtick or backquote or grave accent
\	Backslash
/	Forward slash
[	Open Square Bracket
]	Close Square Bracket
'	Single quotation mark or apostrophe

Table 3-5 (Cont.) Forbidden Special Characters

Forbidden Special Characters	Name
"	Double quotation mark
:	Colon

3.2.1 Sanity Check on MySql Passwords

Perform the following procedure to sanity check MySql passwords.

1. Log in to the source server as admusr.

Username: admusr

Password: <current admin user password>

2. Verify the mysql passwords using the following commands.

For awadmin user account:

```
sudo /usr/TKLC/appworks/bin/aw.wallet credential get mysql default
```

For root user account, use the following command:

```
sudo /usr/TKLC/appworks/bin/aw.wallet credential get mysql root
```

3. If passwords contain forbidden special characters mentioned in the [Table 3-5](#) table, then reset the mysql password using the allowed special character mentioned in the [Table 3-4](#) table.

Note

To reset the mysql password, see *Updating the MySQL Password* in *DSR Security Guide*.

3.3 Upgrade Maintenance Windows

Note

It is recommended that SOAM NE sites containing mated Database Processors (DPs) be upgraded in separate maintenance windows, if possible.

Upgrade Maintenance Windows

Maintenance Window 1:

The following information has to be recorded in this maintenance window:

1. Record the date of the maintenance window.

2. Record the names of the primary SDS NE site, DR SDS NE site, and server's hostnames to be upgraded during Maintenance Window.
3. Verify and record the following information after each server upgrade is completed:
 - Primary SDS NE site name
 - Primary SDS active server
 - Primary SDS standby server
 - Primary SDS query server
 - DR SDS NE site name
 - DR SDS active server
 - DR SDS standby server
 - DR SDS query server

Upgrade Maintenance Windows

Maintenance Window 2:

The following information has to be recorded in this maintenance window:

1. Record the name of SOAM NE site and its server's host names to be upgraded during the maintenance window .
2. Verify and record the following information after each server upgrade is completed:
 - SOAM NE site name
 - Active SOAM Server
 - Standby SOAM Server
 - DP Server Names
 - DP 1 Server
 - DP 2 Server
 - DP 3 Server
 - DP 4 Server
 - DP 5 Server
 - DP 6 Server
 - DP 7 Server
 - DP 8 Server
 - DP 9 Server
 - DP 10 Server

Keep track of maintenance windows for each SOAM NE site.

3.4 Upgrade Preparation Overview

The pre-upgrade procedures shown in the following table should be performed before the upgrade maintenance window and may be performed outside a maintenance window if desired.

Note

If the customer deployment has both the FABR and PCA features enabled, then upgrade the DSR nodes first before upgrading the SDS nodes.

Note

In [Upgrade DR SDS NOAM](#) procedure, Ext ID/MTC-HSS features are introduced in SDS. Provisioning these features is not allowed until all the servers are upgraded and the upgrade is accepted.

Upgrade Preparation Procedures**Table 3-6 Upgrade Preparation Procedures**

Procedure Title	Elapsed Time (Hrs:Min)	
	This Step	Cumulative
Required Materials Check	00:15	00:15
ISO Administration	*	*
Full Database Backup (PROV and COMCOL Env for All Servers)	01:00	01:15

Note

ISO transfers to the target systems cannot be estimated since times vary significantly depending on the number of systems and the speed of the network. The ISO transfers to the target systems should be performed before the scheduled maintenance window. The user should schedule the required maintenance windows accordingly.

3.5 Primary SDS Site or DR SDS Site Upgrade Execution Overview

The procedures shown in the following table are performed inside a maintenance window. The order of the upgrade for the primary NOAM NE and DR NOAM NE needs to be followed as shown in following table.

Note

During the upgrade of servers, there are steps to check the replication status before going to the next server back out. Follow those steps to execute; otherwise, data loss is possible.

Note

During upgrade some alarms/events may be raised that can be ignored. Alarms are mentioned in [#unique_43/unique_43_Connect_42_GUID-FA5B2F0E-069F-4C52-99A4-1B05C9FAF6E9](#).

Table 3-7 Primary SDS or DR SDS Upgrade Procedures Strategy

Procedure Title	Elapsed Time (Hrs:Min)	
	This Step	Cumulative
Upgrade the Primary SDS NOAM	01:00	02:15
Upgrade the Primary SDS NOAM	01:00	03:15

3.6 SOAM Upgrade Execution Overview

The procedures shown in the following table should be performed inside a separate maintenance window.

Table 3-8 SOAM Upgrade Procedures

Procedure Title	Elapsed Time (Hrs:Min)	
	This Step	Cumulative
Upgrade SOAM	01:30	01:30

3.7 Post Upgrade Execution Overview

These procedures are performed only after all sites on network have been upgraded.

Table 3-9 Post Upgrade Procedures

Procedure Title	Elapsed Time (Hrs:Min)	
	This Step	Cumulative
Accept the Upgrade	*	*

3.8 Recovery Procedures Overview

These procedures are customized to the specific situation encountered and therefore do not have well-established time frames. The order of the back out for the primary NOAM NE and DR NOAM NE needs to be followed as shown in the following table.

Note

Backout is not supported if the upgrade was performed from 8.x to 9.x release

Note

During back out of servers, there are steps to check the replication status before going to the next server back out. Follow the steps to perform; otherwise, it may result in data loss.

Note

During the back out some alarms/events may be raised that can be ignored. Alarms are mentioned in step 4 of [#unique_22/unique_22_Connect_42_GUID-8C8E13D3-8EA1-4275-8DF2-94BF4D450E98](#).

Table 3-10 Backout Procedures

Procedure Title	Elapsed Time (Hrs:Min)	
	This Step	Cumulative
Back Out the SOAM	*	*
Back Out the DR SDS NOAM	*	*
Back Out the Primary SDS NOAM	*	*

4

SDS Upgrade Matrix

Upgrading SDS in the customer network is a task that requires multiple procedures of varying types. The matrix shown below provides a guide to the user as to which procedures are to be performed on which site types.

Contact [#unique_15/unique_15_Connect_42_GUID-AAD93B71-B4B8-4F1C-83E5-16C9C91CC52E](#) in needed.

Note

Primary SDS NOAM and DR SDS NOAM sites must be upgraded in the same maintenance window. Replication between Primary and DR SDS NOAM sites will be down till DR SDS NOAM is upgraded completely.

Table 4-1 SDS Upgrade Matrix

Network Element Type	Procedures							
	1	2	3	4	5	6	7	8
Primary NOAM NE DR NOAM NE (SDS/Query Server)	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes
SOAM NE (SOAM/D P)	Yes	No	No	No	No	No	Yes	Yes

Note

Run [#unique_22/unique_22_Connect_42_GUID-8C8E13D3-8EA1-4275-8DF2-94BF4D450E98](#) before and after completing this procedure.

SDS Upgrade – List of Procedures:

- [Required Materials Check](#)
- [ISO Administration](#)
- [Backup TKLCCConfigData](#)

- [Full Database Backup \(PROV and COMCOL Env for All Servers\)](#)
- [Primary or DR SDS NOAM Upgrade Execution](#)
- [Upgrade DR SDS NOAM](#)
- [Upgrade SOAM](#)
- [Workaround to Resolve Syscheck Error for CPU Failure](#)
- [Accept the Upgrade](#)

5

Upgrade Preparation

This section provides detailed procedures to prepare a system for upgrade execution. These procedures may be performed outside of a maintenance window.

5.1 Requirements Check

This procedure verifies all required materials needed to perform an upgrade have been collected and recorded.

1. Verify if all the upgrade requirements have been met. Requirements are listed in section [#unique_32/unique_32_Connect_42_GUID-14ECE4E6-F245-4334-BC36-294EB6C20C02](#). Verify all upgrade requirements have been met.
2. Verify if all administration data needed during upgrade. Verify if all information [#unique_33/unique_33_Connect_42_GUID-CCE8D7F5-9E19-4F82-B343-622722BDD7C3](#) entered is accurate.

5.2 Review Release Notes

Before starting the upgrade, review the Release Notes for the SDS 9.0.x release to understand the functional differences (if any) and possible impacts to the upgrade. When upgrading SDS to the target release, the following alarms may be reported on the GUI during the period when the primary SDS site NE is at the new software level and the DR SDS site NE is at the old software level:

- 31124: A DB replication audit command detected errors
- 31105: The DB merge process (inetmerge) is impaired by a s/w fault
- 31232: High availability server has not received a message on specified path within the configured interval
- 31283: Lost Communication with server (cmha)
- 31109: Topology Config Error (cmha)

These alarms, if present, exist for the active and standby DR SDS site servers. They should clear automatically within five minutes, and cease to be raised once the DR provisioning site NE is upgraded to the same software level as the primary SDS site. To avoid seeing these alarms altogether, the upgrade of the primary SDS Site and DR SDS site NEs should be performed within the same maintenance window.

5.3 Perform Health Check (Upgrade Preparation)

This procedure is part of software upgrade preparation and is used to determine the health and status of the SDS network and servers. This procedure may be performed multiple times, it must be run at least once in 24-36 hours before starting a maintenance window.

Run SDS health check procedures as specified in [#unique_22/unique_22_Connect_42_GUID-8C8E13D3-8EA1-4275-8DF2-94BF4D450E98](#).

5.4 ISO Administration


ISO transfers to the target servers may require a significant amount of time depending on the number of systems and the speed of the network. Therefore, it is highly recommended that the ISO transfers to the target servers be completed before the first scheduled maintenance window.

Note

Add the SDS ISO to the PMAC Software Repository may be performed at any time after ISO administration procedure has been completed.

1. Log in to the SDS NOAM GUI. Use the VIP address to access the primary SDS NOAM GUI as described in [#unique_43/unique_43_Connect_42_GUID-FA5B2F0E-069F-4C52-99A4-1B05C9FAF6E9](#).
2. In the Primary SDS NOAM VIP (GUI), connect to the SDS server. Expand **Status & Manage** click **Files**. Select the host name of the active primary SDS server from the list of tabs. Click **Upload**.


Figure 5-1 Upload

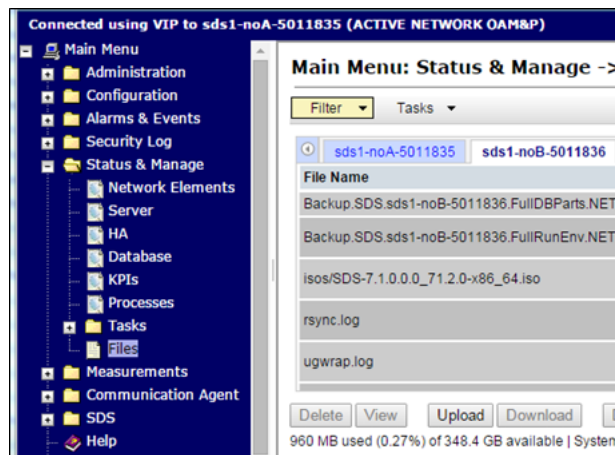


Note

The active primary SDS server displays in the GUI banner as connected to the VIP with a state of **ACTIVE NETWORK OAM&P**.


3. Upload the ISO file, click **Choose File**.

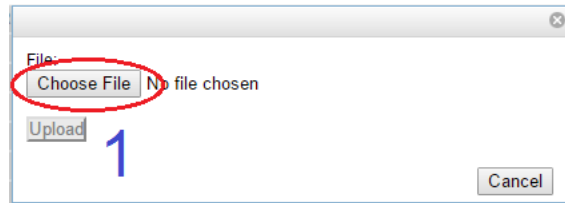Figure 5-2 Choose File


4. Locate the ISO file for the target release and click **Open**.

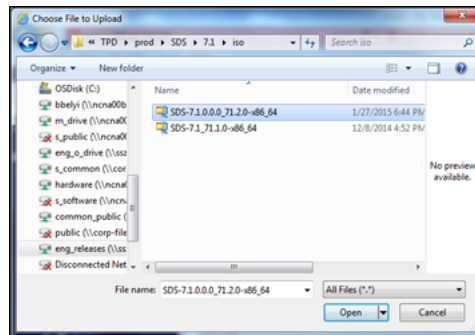Figure 5-3 Open

5. Click **Upload**.

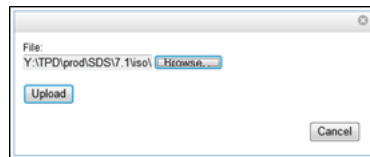Figure 5-4 Upload

6. Monitor the upload until the file transfer completes.

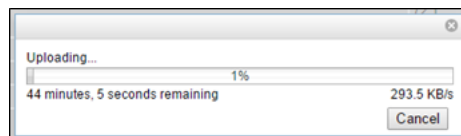Figure 5-5 File Transfer

Note

If transferring the ISO file to the server manually (using secure copy (scp)), the iso must be placed in the `/var/TKLC/db/filemgmt/` directory with 664 permissions and `awadmin:awadm` ownership.

7. Click the **Timestamp** heading twice to sort the column by most recent files.

Figure 5-6 Timestamp

sds1-noA-5011835 sds1-noB-5011836 sds1-qs-5011837 Liberty-SDS-SO-A			
File Name	Size	Type	Timestamp
SDS-7.1.0.0.0_71.2.0-x86_64.iso	863.6 MB	iso	2015-02-03 21:09:37 UTC
rsync.log	2.1 KB	log	2015-02-03 00:00:03 UTC
upgrade.log	87.7 KB	log	2015-01-30 17:10:18 UTC
ugwrap.log	1.3 KB	log	2015-01-29 19:46:05 UTC

8. Run the following commands, on Active NOAM CLI.

- a. Run this command on CLI:

```
sudo sed -i '528i\ sleep(300);' /var/TKLC/appworks/services/SvrUpgrade.php
```

- b. Run this command on CLI:

```
sudo sed -i '/if (array_key_exists("MateHostname", $serverData))/c\ if (is_array($serverData) && array_key_exists("MateHostname", $serverData))' /var/TKLC/appworks/validator/Sds/HaStatusValidator.php
```

- c. Run this command on CLI:

```
sudo sed -i '310s/validate_cd/validate_cd_tmp/' /var/TKLC/appworks/services/FileManagement.php
```


Note

Perform this step only if the base release is 9.0.0.0.0_97.16.0.

9. Deploy the ISO file to all SDS servers in the network.


- a. Select the ISO file.
- b. Click **Validate ISO**.
- c. Wait for validation to pass.
- d. Click **Deploy ISO**.

Figure 5-7 Deploy ISO

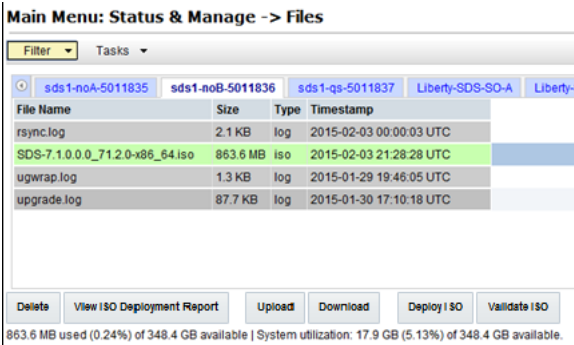


Click **OK**.

Figure 5-8 OK




10. Monitor the ISO deployment status, select the ISO file. Click **View ISO Deployment Report**.

Figure 5-9 ISO Deployment Report

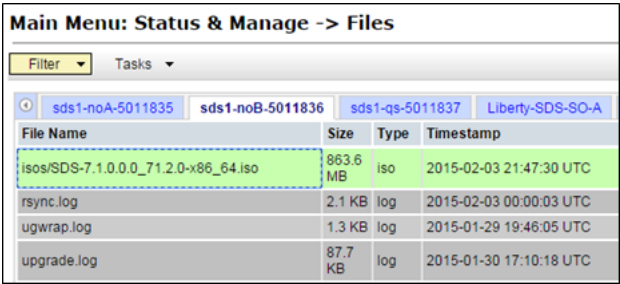

11. View the report, the ISO Deployment Report shows the status of deployment to all servers in the topology. Refresh the report by clicking **Back** and repeating [step 9](#) of this procedure until the **ISO** has been **Deployed** to all servers.

Figure 5-10 Report

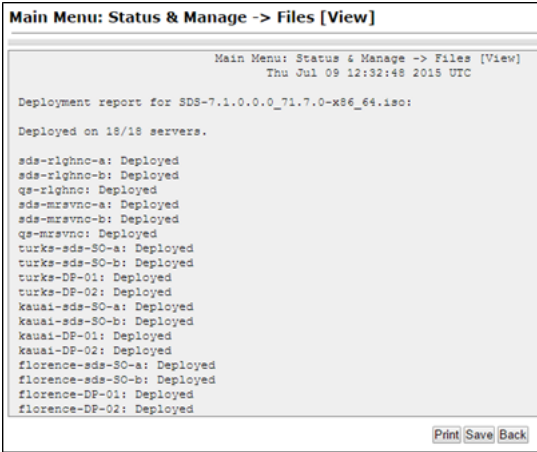

5.5 Back Up TKLCConfigData File

This section backs up the TKLCConfigData file on all the servers. This helps to restore networking and server-related information in some cases. For example, for disaster recovery if a server is lost during an upgrade.

1. Login to the SDS NOAM GUI, use the VIP address to access the primary SDS NOAM GUI as described in [#unique_43/unique_43_Connect_42_GUID-FA5B2F0E-069F-4C52-99A4-1B05C9FAF6E9](#).
2. In the Primary SDS NOAM VIP GUI, export servers. Expand **Configuration** click **Servers**. Select each server in the topology and click **Export**.

Figure 5-11 Servers


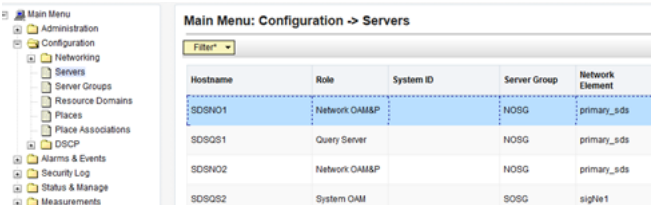


Figure 5-12 Export



Note

The active primary SDS server displays in the GUI banner as it is connected to the VIP with a state **Active Network OAM&P**.

3. Back up TKLCConfig data and access the CLI of the primary SDS NOAM, access the primary SDS NOAM server command line using ssh or a console.

```
ssh admusr@<NOAM_VIP>
```

4. Transfer the TKLCConfigData files for all servers in the /var/TKLC/db/filemgmt directory to a remote location.

```
$ cd /var/TKLC/db/filemgmt
```

```
$ scp TKLCConfigData.<Sever Hostname>.sh
```

```
<username>@<remote-server>:<directory>
```

For example:

```
scp TKLCConfigData.SDSDRN01.sh <username>@<remote-  
server>:<directory>
```

Note

Back up the TKLCConfig data file for all servers.

5.6 Perform Health Check (Post ISO Administration)

This procedure is part of Software Upgrade Preparation and is used to determine the health and status of the entire SDS network and servers. This may be performed multiple times but must also be run at least once within the period of 24-36 hours before the start of a maintenance window.

Run SDS Health Check procedures as specified in [#unique_22/unique_22_Connect_42_GUID-8C8E13D3-8EA1-4275-8DF2-94BF4D450E98](#)

5.7 Full Database Back up (PROV and COMCOL ENV for All Servers)

This procedure is part of software upgrade preparation and is used to conduct a full backup of the COMCOL run environment on every server, to be used in the event of a back out or rollback of the new software release.

Note


For 8.6.x release, backup files are created automatically when ./majorUpgrade.sh script is used.

Note

Do not perform this procedure until the ISO deployment is completed to all servers in the topology. Partial back out (that is, back out of one site) may fail in the event of incomplete ISO deployment or roll back deployment.

1. Log in to the SDS NOAM GUI, use the VIP address to access the primary SDS NOAM GUI as described in [#unique_43/unique_43_Connect_42_GUID-FA5B2F0E-069F-4C52-99A4-1B05C9FAF6E9](#)
2. In the Primary SDS NOAM VIP (GUI), verify the name of the primary active network OAMP SDS server. Expand **Status & Manage** click **Database**.

Figure 5-13 Database

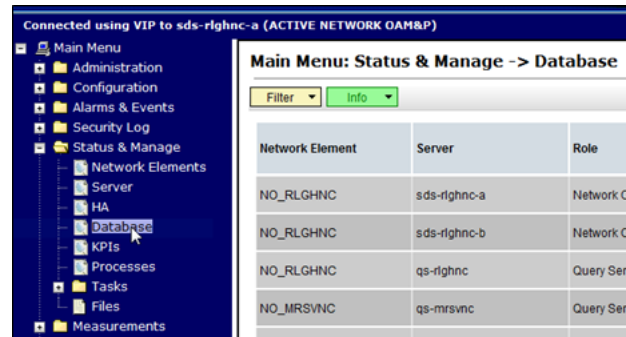

3. Verify the host name of the active primary OAMP SDS server from the GUI banner.

Figure 5-14 Verify host name


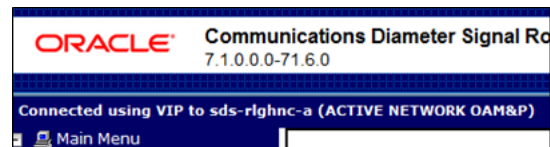


Figure 5-15 Host name



4. In the Primary SDS NOAM VIP, back up the server. Select the SDS server.

Figure 5-16 SDS Server

Main Menu: Status & Manage -> Database					
Filter	Info				
Network Element	Server	Role	OAM Max HA Role	Application Max HA Role	
NO_RLGHNC	sds-rlghnc-a	Network OAM&P	Active	OOS	N
NO_RLGHNC	sds-rlghnc-b	Network OAM&P	Standby	OOS	N

5. Click **Backup**

Figure 5-17 Back up

6. Back up the provisioning data, un-check the **Configuration** check box. Enter a **Comment**.

Figure 5-18 Database Back up

Main Menu: Status & Manage -> Database [Backup]

Database Backup


Field	Value	De
Server:	sds-rlghnc-a	
Select data for backup	☒ Provisioning ☐ Configuration	Se
Compression	☐ gzip ☒ bz2 ☐ none *	Se
Archive Name	Backup.sds.sds-rlghnc-a.Provisioning.NETWORK_OAMP.20150707_18520 *	M
Comment	PreUpgrade to 71.7.0	M.

Ok Cancel


Note

Entering a **Comment** is mandatory.

7. Click **Info** to verify if the changes have passed pre-validation.

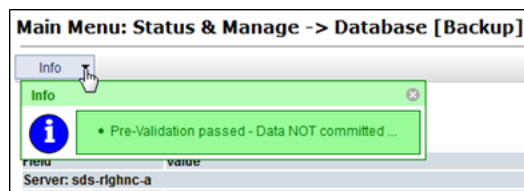Figure 5-19 Verify Information

8. Click **OK**.
9. In the Primary SDS NOAM VIP, verify status. Wait for the screen to refresh (for about 1or 2 minutes).Click the **Info** tab to verify the **Provisioning Backup** shows a status of **MAINT_CMD_SUCCESS**.

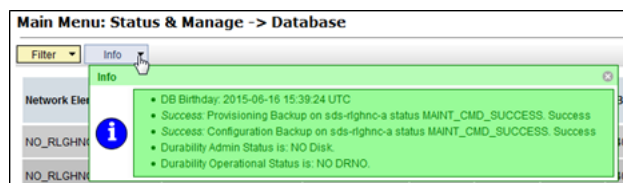Figure 5-20 Provisioning Backup

10. If a status of MAINT_IN_PROGRESS is received, then refresh the Info message, expand **Status & Manage** click **Database**. Click on the **Info** tab again.

Note

Depending on the size of the SDS provisioning database, the backup could take a couple of hours to complete.

This completes the backup of the SDS provisioning database.

11. In the Primary SDS NOAM VIP, back up the servers. Expand **Administration** select **Software Management** click **Upgrade**. Click **Backup All**.

Figure 5-21 Back up Server

Hostname	Upgrade State	OAM Max HA Role	Server Role	Function
sds-rlghnc-a	Backup Needed	Active	Network OAM&P	OAM&P
sds-rlghnc-b	Backup Needed	Standby	Network OAM&P	OAM&P
qs-rlghnc	Backup Needed	Observer	Query Server	QS

Note

All servers in an Upgrade state are displayed on the screen. Servers in a **Forced Standby** or **OOS** state are not displayed.

12. Select the **Exclude** option. Click **OK**.

Figure 5-22 Exclude Option

Network element	Action	Server(s) in the proper state for backup
NO_RLGHNC	Back up	sds-rlghnc-a sds-rlghnc-b qs-rlghnc
NO_MRSVNC	Back up	sds-mrsvnc-a sds-mrsvnc-b qs-mrsvnc
SO_TURKS	Back up	turks-sds-SO-a turks-sds-SO-b turks-DP-01 turks-DP-02
SO_KAUAI	Back up	kauai-sds-SO-a kauai-sds-SO-b kauai-DP-01 kauai-DP-02
SO_FLORENCE	Back up	florence-sds-SO-a florence-sds-SO-b florence-DP-01 florence-DP-02

Full backup options

Database parts exclusion: ☒ Exclude ☐ Do not exclude

Select "Exclude" to perform a full backup of the COM /usr/TKLC/appworks/etc/exclude_parts.d/.

Select "Do not exclude" to perform a full backup of the COM /usr/TKLC/appworks/etc/.

Ok Cancel

13. In the Primary SDS NOAM VIP, monitor progress. Verify the **Upgrade State** of the servers goes from a **Backup in Progress** state to a **Ready** state.

Figure 5-23 Upgrade State

Main Menu: Administration -> Software Management -> Upgrade

Filter Tasks

NO_rhnc_grp DP_florence_DP_01_grp DP_florence_DP_02_grp DP_kauai_DP_01_g

Hostname	Upgrade State	OAM Max HA Role	Server Role	Function
	Server Status	Appl Max HA Role	Network Element	
sds-rhnc-a	Backup In Progress	Active	Network OAM&P	OAM&P
	Norm	N/A	NO_RLGHNC	
sds-rhnc-b	Backup In Progress	Standby	Network OAM&P	OAM&P
	Norm	N/A	NO_RLGHNC	
qs-rhnc	Backup In Progress	Observer	Query Server	QS
	Norm	N/A	NO_RLGHNC	

Figure 5-24 Upgrade State Ready

Main Menu: Administration -> Software Management -> Upgrade

Filter Tasks

NO_rhnc_grp DP_florence_DP_01_grp DP_florence_DP_02_grp DP_kauai_DP_01_g

Hostname	Upgrade State	OAM Max HA Role	Server Role	Function
	Server Status	Appl Max HA Role	Network Element	
sds-rhnc-a	Ready	Active	Network OAM&P	OAM&P
	Norm	N/A	NO_RLGHNC	
sds-rhnc-b	Ready	Standby	Network OAM&P	OAM&P
	Norm	N/A	NO_RLGHNC	
qs-rhnc	Ready	Observer	Query Server	QS
	Norm	N/A	NO_RLGHNC	

Note

It can take up to 15 minutes for COMCOL backup to complete as the screen automatically refreshes.

14. Click on each server tab and monitor the backups until the server **Upgrade State** shows **Ready** for all servers on the tab.

Figure 5-25 Server Upgrade State

Main Menu: Administration -> Software Management -> Upgrade

Filter Tasks

NO_rhnc_grp DP_florence_DP_01_grp DP_florence_DP_02_grp DP_kauai_DP_01_g

Hostname	Upgrade State	OAM Max HA Role	Server Role	Function
	Server Status	Appl Max HA Role	Network Element	
florence-DP-01	Ready	Active	MP	SDS
	Norm	OOS	SO_FLORENCE	

6

Automated Site Upgrade

There are multiple methods available for upgrading a site. The newest and most efficient way to upgrade a site is the Automated Site Upgrade feature. As the name implies, this feature upgrades an entire site (SOAM's and DP servers) with a minimum of user interaction. Once the upgrade is initiated, the upgrade automatically prepares the server(s), performs the upgrade, and sequences to the next server or group of servers until all servers in the site are upgraded. The server upgrades are sequenced in a manner that preserves data integrity and processing capacity.

Automated Site Upgrade can be used to upgrade the SOAM and DP servers. However, Auto Site Upgrade cannot be used to upgrade PMAC or TVOE at a site.


With this feature, a site upgrade can be initiated on SO-A SG and all of its sub-servers (in this example, DP1 SG) using a minimum of GUI selections. The upgrade performs the following actions:

1. Upgrade SOA-1 and SOA-2.
2. Upgrade the servers in DP1 SG.
3. Immediately begin the upgrade of any other server groups, which are the sub-servers of SO-A SG (not shown). These upgrades begin in parallel with server upgrade in DP1 SG.

Note

Auto Site Upgrade does not automatically initiate the upgrade of TSite 2 in parallel with TSite 1. However, the feature allows the user to initiate Auto Site Upgrade of multiple sites in parallel manually.

Figure 6-1 Upgrade Perspective of SDS Site Topology

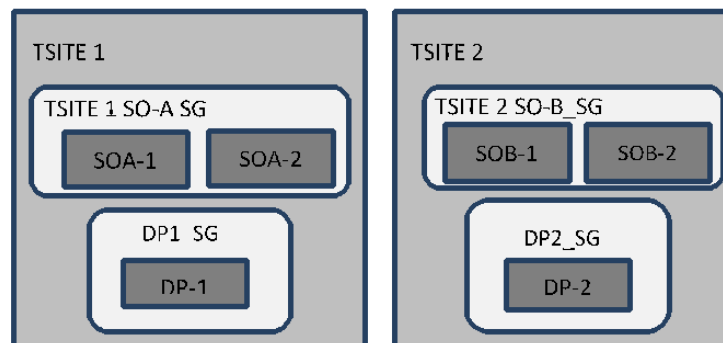

6.1 Site Upgrade Execution

With Auto Site Upgrade, upgrade is initiated by expanding **Administration** selecting **Software Management** and clicking on **Upgrade screen**. On initial entry to this screen, the user is

presented with a tabbed display of the NOAM server group and SOAM sites ([Figure 6-2](#)). When the NOAM server group tab is selected (as shown in [Figure 6-2](#)), this screen is largely unchanged from the upgrade screen of previous releases. The NOAM server group servers are displayed with the usual assortment of buttons. On this screen, the Auto Upgrade button refers to Automated Server Group upgrade, not Automated Site Upgrade. The site upgrade feature becomes available once a SOAM server group tab is selected. The SOAM server group tabs correspond to the topological sites (TSites).

Figure 6-2 Site Upgrade — NOAM View

Main Menu: Administration -> Software Management -> Upgrade

Filter* Tasks*

NOSG DRNOSG SOSG

Hostname	Upgrade State	OAM HA Role	Server Role	Function	Application Version
	Server Status	Appl HA Role	Network Element		Upgrade ISO
SDS-QS	Ready	Observer	Query Server	QS	8.1.0.0-81.15.2
	Norm	N/A	NO_DSR_VM_NE		
SDS-NO	Ready	Active	Network OAM&P	OAM&P	8.1.0.0-81.15.2
	Err	N/A	NO_DSR_VM_NE		
SDS-NO2	Ready	Standby	Network OAM&P	OAM&P	8.1.0.0-81.15.2
	Norm	N/A	NO_DSR_VM_NE		

On selecting a SOAM site tab on the Upgrade Administration screen, the site summary screen displays ([Figure 6-3](#)). Just below the row of NOAM and SOAM tabs is a row of links related to the selected SOAM site. The first link on the site summary screen displays the **Entire Site** view. In the entire site view, all of the server groups for the site are displayed in table form, with each server group populating one row. An upgrade summary of the server groups is provided in the table columns:

- The **Upgrade Method** column shows how the server group is upgraded. The upgrade method is derived from the server group function and the bulk availability option (see section [#unique 58/unique 58 Connect 42 GUID-32327D1E-6737-46FB-B3C8-E9A29085A554](#) for additional details on bulk availability).
- The **Server Upgrade States** column groups the servers by state, indicating the number of servers in the server group that are in each state.
- The **Server Application Versions** column indicates the current application version, indicating the number of servers in the server group that are at each version.

Figure 6-3 Site Upgrade — Entire Site View


Main Menu: Administration -> Software Management -> Upgrade

Filter* Tasks*

NOSG DRNOSG SOSG

Entire Site SOSG DPBG1 DPBG2 DPBG3 DPBG4

Server Group	Function	Upgrade Method	Server Upgrade States	Server Application Versions
SOSG	SDS	OAM (Bulk)	Ready (2/2)	8.1.0.0-81.15.2 (2/2)
DPBG2	SDS	Bulk (50% availability)	Ready (1/1)	8.1.0.0-81.15.2 (1/1)
DPBG1	SDS	Bulk (50% availability)	Ready (1/1)	8.1.0.0-81.15.2 (1/1)
DPBG4	SDS	Bulk (50% availability)	Ready (1/1)	8.1.0.0-81.15.2 (1/1)
DPBG3	SDS	Bulk (50% availability)	Ready (1/1)	8.1.0.0-81.15.2 (1/1)

Figure 6-4 Site Upgrade — Entire Site View

For a server to be considered Ready for upgrade, the following conditions must hold true:

- Server has not been upgraded.
- The FullDBParts and FullRunEnv backup files exist in the filemgmt area.

A site is eligible for Auto Site Upgrade when at least one server in the site is upgrade ready.

Click **Site Upgrade** from the **Entire Site** view to display the Upgrade Site Initiate screen (Figure 6-5). The Site Initiate screen shows the site upgrade as a series of upgrade cycles. For the upgrade shown in Figure 6-5, Cycle 1 upgrades the spare and standby SOAMs in parallel.

Note

This scenario assumes default settings for the site upgrade options. These options are described in section [#unique_58/unique_58_Connect_42_GUID-32327D1E-6737-46FB-B3C8-E9A29085A554](#).

The specific servers to be upgraded in each cycle are identified in the **Servers** column on the Site Initiate screen. Cycle 1 is an atomic operation, meaning Cycle 2 cannot begin until Cycle 1 is complete. Once the standby SOAM are in the **Accept or Reject** state, the upgrade sequences to Cycle 2 to upgrade the active SOAM. Cycle 2 is also atomic - Cycle 3 does not begin until Cycle 2 is complete.

Figure 6-5 Site Upgrade — Site Initiate Screen

Main Menu: Administration -> Software Management -> Upgrade [Site Initiate]

Info*

Cycle	Action	Servers															
1	Upgrade	<table border="1"> <thead> <tr> <th>Server Group</th> <th>Server</th> <th>Function</th> <th>Method</th> <th>Version</th> </tr> </thead> <tbody> <tr> <td>SOSG</td> <td>SDS-SO2 - Standby</td> <td>SDS</td> <td>OAM (Bulk)</td> <td>8.1.0.0.0-81.15.2</td> </tr> </tbody> </table>	Server Group	Server	Function	Method	Version	SOSG	SDS-SO2 - Standby	SDS	OAM (Bulk)	8.1.0.0.0-81.15.2					
Server Group	Server	Function	Method	Version													
SOSG	SDS-SO2 - Standby	SDS	OAM (Bulk)	8.1.0.0.0-81.15.2													
2	Upgrade	<table border="1"> <thead> <tr> <th>Server Group</th> <th>Server</th> <th>Function</th> <th>Method</th> <th>Version</th> </tr> </thead> <tbody> <tr> <td>SOSG</td> <td>SDS-SO - Active</td> <td>SDS</td> <td>OAM (Bulk)</td> <td>8.1.0.0.0-81.15.2</td> </tr> </tbody> </table>	Server Group	Server	Function	Method	Version	SOSG	SDS-SO - Active	SDS	OAM (Bulk)	8.1.0.0.0-81.15.2					
Server Group	Server	Function	Method	Version													
SOSG	SDS-SO - Active	SDS	OAM (Bulk)	8.1.0.0.0-81.15.2													
3	Upgrade	<table border="1"> <thead> <tr> <th>Server Group</th> <th>Server</th> <th>Function</th> <th>Method</th> <th>Version</th> </tr> </thead> <tbody> <tr> <td>DPSG1</td> <td>SDS-DP1</td> <td>SDS</td> <td>Bulk (50% availability)</td> <td>8.1.0.0.0-81.15.2</td> </tr> <tr> <td>DPSG2</td> <td>SDS-DP2</td> <td>SDS</td> <td>Bulk (50% availability)</td> <td>8.1.0.0.0-81.15.2</td> </tr> </tbody> </table>	Server Group	Server	Function	Method	Version	DPSG1	SDS-DP1	SDS	Bulk (50% availability)	8.1.0.0.0-81.15.2	DPSG2	SDS-DP2	SDS	Bulk (50% availability)	8.1.0.0.0-81.15.2
Server Group	Server	Function	Method	Version													
DPSG1	SDS-DP1	SDS	Bulk (50% availability)	8.1.0.0.0-81.15.2													
DPSG2	SDS-DP2	SDS	Bulk (50% availability)	8.1.0.0.0-81.15.2													
4	Upgrade	<table border="1"> <thead> <tr> <th>Server Group</th> <th>Server</th> <th>Function</th> <th>Method</th> <th>Version</th> </tr> </thead> <tbody> <tr> <td>DPSG3</td> <td>SDS-DP3</td> <td>SDS</td> <td>Bulk (50% availability)</td> <td>8.1.0.0.0-81.15.2</td> </tr> <tr> <td>DPSG4</td> <td>SDS-DP4</td> <td>SDS</td> <td>Bulk (50% availability)</td> <td>8.1.0.0.0-81.15.2</td> </tr> </tbody> </table>	Server Group	Server	Function	Method	Version	DPSG3	SDS-DP3	SDS	Bulk (50% availability)	8.1.0.0.0-81.15.2	DPSG4	SDS-DP4	SDS	Bulk (50% availability)	8.1.0.0.0-81.15.2
Server Group	Server	Function	Method	Version													
DPSG3	SDS-DP3	SDS	Bulk (50% availability)	8.1.0.0.0-81.15.2													
DPSG4	SDS-DP4	SDS	Bulk (50% availability)	8.1.0.0.0-81.15.2													

Upgrade Settings

Upgrade ISO: SDS-8.1.0.0.0_81.16.0-x86_64.iso Select the desired upgrade ISO media file.

Cycles 3 through 4 upgrade all of the C-level servers for the site. These cycles are not atomic.

In [Figure 6-5](#), Cycle 3 consists of SDS-DP1 and SDS-DP2 and Cycle 4 consists of SDS-DP3 and SDS-DP4.

The site upgrade is complete when every server in the site is in the **Accept or Reject** state.

In selecting the servers that will be included with each upgrade cycle, particularly the C-level, consideration is given to the server group function, the upgrade availability option, and the HA designation.

Note

The minimum availability option is a central component of the server selections for site upgrade. The effect of this option on server availability is described in detail in [#unique_59/unique_59_Connect_42_GUID-63F77017-DBE1-4547-BEA7-91829B3A6939](#).

To initiate the site upgrade, a target ISO is selected from the ISO pick list in the **Upgrade Settings** section of the Site Initiate screen ([Figure 6-5](#)). Once the **OK** button is clicked, the upgrade starts, and control returns to the Upgrade Administration screen ([Figure 6-6](#)). With the **Entire Site** link selected, a summary of the upgrade status for the selected site displays. This summary identifies the server group(s) currently upgrading, the number of servers within each server group that are upgrading, and the number of servers that are pending upgrade. This view can be used to monitor the upgrade status of the overall site. More detailed status is available by selecting the individual server group links. The server group view shows the status of each individual server within the selected server group.

Figure 6-6 Site Upgrade Monitoring

Main Menu: Administration -> Software Management -> Upgrade

Filter* Tasks

NOBG DRNOBG SOSG

Entire Site SOSG DPSG1 DPSG2 DPSG3 DPSG4

Server Group	Function	Upgrade Method	Server Upgrade States	Server Application Versions
SOSG	SDS	OAM (Bulk)	Pending (1/2) Validating (1/2)	8.1.0.0-81.15.2 (2/2)
DPSG1	SDS	Bulk (50% availability)	Pending (1/1)	8.1.0.0-81.15.2 (1/1)
DPSG4	SDS	Bulk (50% availability)	Pending (1/1)	8.1.0.0-81.15.2 (1/1)

When a server group link is selected on the Upgrade Administration screen, the table rows are populated with the upgrade details of the individual servers within that server group (Figure 6-7).

Figure 6-7 Server Group Upgrade Monitoring

Main Menu: Administration -> Software Management -> Upgrade

Filter* Tasks

NOBG DRNOBG SOSG

Entire Site SOSG DPSG1 DPSG2 DPSG3 DPSG4

Hostname	Upgrade State	OAM HA Role	Server Role	Function	Application Version	Start Time	Finish Time
	Server States	Appl HA Role	Network Element	Upgrade ISO	Status Message		
SDS-S02	Upgrading	Standby	System OAM	OAM	8.1.0.0-81.15.2	2017-05-25 04:50:10 EDT	
	Warn	N/A	SO_DSR_VM_NE		SDS-8.1.0.0_81.15.0-x86_64.iso	Upgrade is in progress	
SDS-S0	Pending	Active	System OAM	OAM	8.1.0.0-81.15.2		
	Norm	N/A	SO_DSR_VM_NE		SDS-8.1.0.0_81.15.0-x86_64.iso	Pending Upgrade	

Upon completion of a successful upgrade, every server in the site is in the **Accept or Reject** state (Figure 6-8).

Figure 6-8 Server Group Upgrade Monitoring

Main Menu: Administration -> Software Management -> Upgrade

Filter* Tasks

NOBG DRNOBG SOSG

Entire Site SOSG DPSG1 DPSG2 DPSG3 DPSG4

Hostname	Upgrade State	OAM HA Role	Server Role	Function	Application Version	Start Time	Finish Time
	Server States	Appl HA Role	Network Element	Upgrade ISO	Status Message		
SDS-S02	Accept or Reject	Standby	System OAM	OAM	8.1.0.0-81.15.0	2017-05-25 04:50:10 EDT	2017-05-25 05:13:03 EDT
	Warn	N/A	SO_DSR_VM_NE		SDS-8.1.0.0_81.15.0-x86_64.iso	Success: Server upgrade is complete	
SDS-S0	Ready	Active	System OAM	OAM	8.1.0.0-81.15.2		
	Norm	N/A	SO_DSR_VM_NE				

See [#unique_60/unique_60_Connect_42_GUID-AFD2C766-3159-4E54-B1D7-C5201CE7A6D7](#) for a description of canceling and restarting the Auto Site Upgrade.

6.2 Minimum Server Availability

The concept of Minimum Server Availability plays a key role during an upgrade using Automated Site Upgrade. The goal of server availability is to ensure that at least a specified percentage of servers (of any given type) remain in service to process traffic and handle administrative functions while other servers are upgrading.

For example, if the specified minimum availability is 50% and there are eight servers of type **X**, then four remain in service while four upgrade. However, if there are nine server of type **X**, then the minimum availability requires that five remain in service while four upgrade. The minimum availability calculation automatically rounds up in the event of a non-zero fractional remainder.

To meet the needs of a wide-ranging customer base, the minimum availability percentage is a user-configurable option. The option allows for settings of 50%, 66%, and 75% minimum availability. There is also a setting of 0% for lab upgrade support. This option is described in detail in section [#unique_58/unique_58_Connect_42_GUID-32327D1E-6737-46FB-B3C8-E9A29085A554](#).

6.3 Site Upgrade Options

To minimize user interactions, the automated site upgrade makes use of a pair of pre-set options to control certain aspects of the sequence. These options control how many servers remain in service while others are upgrading and are located on the **Administration** screen under **General Options**. The default settings for these options maximize the maintenance window usage by upgrading servers in parallel as much as possible.

Figure 6-9 Auto Site Upgrade General Options

General options settings	
Site Upgrade Bulk Availability *	1 Site based upgrade availability for bulk upgrade of MP groups. (0 = none, 1 = 50%, 2 = 66%, 3 = 75%). ** Cannot be changed while any site upgrade is running. ** [Default = 1, Range = 0-3] [A value is required]
Site Upgrade SOAM Method *	1 Site based upgrade SOAM method. (0 = serial, 1 = bulk) Note: Bulk upgrade will upgrade all non-active SOAM servers together. ** Cannot be changed while any site upgrade is running. ** [Default = 1, Range = 0-1] [A value is required]

The first option that affects the upgrade sequence is the **Site Upgrade Bulk Availability** setting. This setting determines the number of C-level servers that remain in service during the upgrade. The default setting of **1** equates to 50% availability, meaning a minimum of one-half of the servers stay in service during the upgrade. The default setting is the most aggressive setting for upgrading the site, requiring the minimum number of cycles, thus the least amount of time. The settings of 66% and 75% increase the number of servers that remain in service during the upgrade. Note that increasing the availability percentage may increase the overall length of the upgrade.

A setting of **0** for the bulk availability option allows all of the DPs to be upgraded at once. This setting is not recommended for live production systems.

The Site Upgrade General Options cannot be changed while a site upgrade is in progress. Attempting to change either option while a site upgrade is in progress results in:

[Error Code xxx] - Option cannot be changed because one or more automated site upgrades are in progress

The second option that affects the upgrade sequence is the **Site Upgrade SOAM Method**. This option determines the sequence in which the SOAMs are upgraded. The default value of **1** considers the OAM HA role of the SOAMs to determine the upgrade order. In this mode, all non-active SOAM servers are upgraded first (in parallel), followed by the active SOAM.

Changing the Site Upgrade SOAM Method setting to **0** causes the standby SOAM and the spare SOAM(s) to be upgraded serially. With this mode, the SOAM upgrade could take as many as four cycles to complete (that is, Spare - Spare - Standby - Active). As for SDS, there are no spare SOAMs, so this setting has no impact on the SOAM upgrade order.

Regardless of the SOAM upgrade method, the active SOAM are always upgraded after the standby SOAM.

6.4 Cancel and Restart Auto Site Upgrade

When an Auto Site Upgrade is initiated, several tasks are created to manage the upgrade of the individual server groups as well as the servers within the server groups. These tasks can be monitored and managed by navigating to **Status & Manage** select **Tasks** and click **Active Tasks**.

The main site upgrade controller task is identified by the naming convention **<site_name> Site Upgrade**. In [Site Upgrade Monitoring](#), the main task is task ID 1.

Figure 6-10 Site Upgrade Active Tasks

Main Menu: Status & Manage → Tasks → Active Tasks Thu May 25 04:52:51 2017 EDT

Filter*

ID	Name	Status	Start Time	Update Time	Result	Result Details	Progress
3	SDS-S02 Server Upgrade (in SOSG Server Group Upgrade)	running	2017-05-25 04:50:01 EDT	2017-05-25 04:52:00 EDT	0	Upgrade is in progress	17%
2	SOSG Server Group Upgrade (in SOSG Site Upgrade)	running	2017-05-25 04:49:52 EDT	2017-05-25 04:50:01 EDT	0	Upgrade(s) started	5%
1	SOSG Site Upgrade	running	2017-05-25 04:49:43 EDT	2017-05-25 04:49:52 EDT	0	Upgrade(s) started	5%
0	Pre-upgrade full backup	completed	2017-05-15 02:43:27 EDT	2017-05-15 02:43:52 EDT	0	Full backup on SDS-NO	100%

Cancel

To cancel the site upgrade, select the site upgrade task and click **Cancel**. A screen asks you to confirm the cancel operation. The status changes from **running** to **completed**. The **Results Details** column updates to display **Site upgrade task canceled by user**. All server group upgrade tasks, which are under the control of the main site upgrade task, immediately transition to **completed** state. However the site upgrade cancellation has no effect on the individual server upgrade tasks that are in progress. These tasks continue to completion. [Figure 6-11](#) shows the Active Task screen after a site upgrade has been canceled.

Once the site upgrade task is canceled, it cannot be restarted. However, a new site upgrade can be started using the Upgrade Administration screen.

After user has canceled the task. The servers, which were in progress when the upgrade was canceled, continued to upgrade to the target release.

Figure 6-11 User Canceled the Site Upgrade Tasks

Main Menu: Status & Manage → Tasks → Active Tasks Thu May 25 04:53:29 2017 EDT

Filter*

ID	Name	Status	Start Time	Update Time	Result	Result Details	Progress
3	SDS-S02 Server Upgrade (in SOSG Server Group Upgrade)	running	2017-05-25 04:50:01 EDT	2017-05-25 04:53:00 EDT	0	Upgrade is in progress	18%
2	SOSG Server Group Upgrade (in SOSG Site Upgrade)	running	2017-05-25 04:49:52 EDT	2017-05-25 04:50:01 EDT	0	Upgrade(s) started	5%
1	SOSG Site Upgrade	completed	2017-05-25 04:49:43 EDT	2017-05-25 04:53:27 EDT	0	Site upgrade task cancelled by user.	5%
0	Pre-upgrade full backup	completed	2017-05-15 02:43:27 EDT	2017-05-15 02:43:52 EDT	0	Full backup on SDS-NO	100%

[Figure 6-11](#) represents a site upgrade that was canceled before the site was completely upgraded. The servers that were in progress when the upgrade was canceled continued to upgrade to the target release. These servers are now in the **Accept or Reject** state. The servers that were pending when the upgrade was canceled are now in the **Ready** state, ready to be upgraded.

To restart the upgrade, verify the **Entire Site** link is selected and click **Site Upgrade**. The Upgrade Site Initiate screen displays.

Figure 6-12 Partially Upgraded Site

Main Menu: Administration -> Software Management -> Upgrade

Filter* Tasks Thu May 25 09:13:43 2017

NO9G DRW09G SOSG

Entire Site SOSG DPSG1 DPSG2 DPSG3 DPSG4

Server Group	Function	Upgrade Method	Server Upgrade States	Server Application Versions
SOSG	SDS	OAM (Bulk)	Ready (1/2) Accept or Reject (1/2)	8.1.0.0-81.15.2 (1/2), 8.1.0.0-81.15.0 (1/2)
DPSG1	SDS	Bulk (50% availability)	Ready (1/1)	8.1.0.0-81.15.2 (1/1)
DPSG4	SDS	Bulk (50% availability)	Ready (1/1)	8.1.0.0-81.15.2 (1/1)
DPSG3	SDS	Bulk (50% availability)	Ready (1/1)	8.1.0.0-81.15.2 (1/1)
DPSG2	SDS	Bulk (50% availability)	Ready (1/1)	8.1.0.0-81.15.2 (1/1)

On the Upgrade Site Initiate screen, the servers that have not yet been upgraded are grouped into the number of cycles that are required to complete the site upgrade. As an example, [Figure 6-12](#) shows the upgrade that was canceled and only three cycles are needed since the availability requirements can be met by the servers that have already been upgraded. Once an ISO is selected and the **OK** button is clicked, the site upgrade continues normally.

Figure 6-13 Restarting Site Upgrade

Main Menu: Administration -> Software Management -> Upgrade [Site Initiate]

Info*

Cycle	Action	Servers															
1	Upgrade	<table> <tr> <th>Server Group</th> <th>Server</th> <th>Function</th> <th>Method</th> <th>Version</th> </tr> <tr> <td>SOSG</td> <td>SDS-SO - Active</td> <td>SDS</td> <td>OAM (Bulk)</td> <td>8.1.0.0-81.15.2</td> </tr> </table>	Server Group	Server	Function	Method	Version	SOSG	SDS-SO - Active	SDS	OAM (Bulk)	8.1.0.0-81.15.2					
Server Group	Server	Function	Method	Version													
SOSG	SDS-SO - Active	SDS	OAM (Bulk)	8.1.0.0-81.15.2													
2	Upgrade	<table> <tr> <th>Server Group</th> <th>Server</th> <th>Function</th> <th>Method</th> <th>Version</th> </tr> <tr> <td>DPSG1</td> <td>SDS-DP1</td> <td>SDS</td> <td>Bulk (50% availability)</td> <td>8.1.0.0-81.15.2</td> </tr> <tr> <td>DPSG2</td> <td>SDS-DP2</td> <td>SDS</td> <td>Bulk (50% availability)</td> <td>8.1.0.0-81.15.2</td> </tr> </table>	Server Group	Server	Function	Method	Version	DPSG1	SDS-DP1	SDS	Bulk (50% availability)	8.1.0.0-81.15.2	DPSG2	SDS-DP2	SDS	Bulk (50% availability)	8.1.0.0-81.15.2
Server Group	Server	Function	Method	Version													
DPSG1	SDS-DP1	SDS	Bulk (50% availability)	8.1.0.0-81.15.2													
DPSG2	SDS-DP2	SDS	Bulk (50% availability)	8.1.0.0-81.15.2													
3	Upgrade	<table> <tr> <th>Server Group</th> <th>Server</th> <th>Function</th> <th>Method</th> <th>Version</th> </tr> <tr> <td>DPSG3</td> <td>SDS-DP3</td> <td>SDS</td> <td>Bulk (50% availability)</td> <td>8.1.0.0-81.15.2</td> </tr> <tr> <td>DPSG4</td> <td>SDS-DP4</td> <td>SDS</td> <td>Bulk (50% availability)</td> <td>8.1.0.0-81.15.2</td> </tr> </table>	Server Group	Server	Function	Method	Version	DPSG3	SDS-DP3	SDS	Bulk (50% availability)	8.1.0.0-81.15.2	DPSG4	SDS-DP4	SDS	Bulk (50% availability)	8.1.0.0-81.15.2
Server Group	Server	Function	Method	Version													
DPSG3	SDS-DP3	SDS	Bulk (50% availability)	8.1.0.0-81.15.2													
DPSG4	SDS-DP4	SDS	Bulk (50% availability)	8.1.0.0-81.15.2													

Upgrade Settings

Upgrade ISO
SDS-8.1.0.0_81.16.0-x86_64.iso

Select the desired upgrade ISO media file.

Ok

Cancel

Automated Server Group Upgrade

The Automated Server Group (ASG) upgrade feature allows the user to upgrade all of the servers automatically in a server group simply by specifying a set of controlling parameters.

The purpose of ASG is to simplify and automate segments of the SDS upgrade. The SDS has long supported the ability to select multiple servers for upgrade. In doing so however, it was incumbent on the user to determine ahead of time which servers could be upgraded in parallel, considering traffic impact. If the servers were not carefully chosen, the upgrade could adversely impact system operations.

When a server group is selected for upgrade, ASG upgrades each of the servers serially, or in parallel, or a combination of both, while enforcing minimum service availability. The number of servers in the server group that are upgraded in parallel is user selectable. The procedures in this document provide the detailed steps specifying when to use ASG and the appropriate parameters that should be selected for each server group type.

ASG is the default upgrade method for NOAM and SOAM server group types associated with the SDS. DP's use Auto Site Upgrade feature. However, there may be some instances in which the manual upgrade method is preferred. In all cases where ASG is used, procedures for a manual upgrade are also provided.

Note

To use ASG on a server group, no servers in that server group can be already upgraded – either by ASG or manually.

SDS continues to support the parallel upgrade of server groups, including any combination of automated and manual upgrade methods.

For SDS Automated Server Group (ASG) upgrade refer the steps as specified in [#unique_62/unique_62_Connect_42_GUID-97AD59AA-540D-41D5-8D2B-F87B033E5B2C](#).

7.1 Cancel and Restart Automated Server Group Upgrade

When a server group is upgraded using ASG, each server within that server group is automatically prepared for upgrade, upgraded to the target release, and returned to service on the target release. Once an ASG upgrade is initiated, the task responsible for controlling the sequencing of servers entering upgrade can be manually canceled by navigating to **Status & Manage** and clicking **Active Tasks** ([Figure 7-1](#)) if necessary. Once the task is canceled, it cannot be restarted. However, a new ASG task can be started using the Upgrade Administration screen.

For example, in [Figure 7-1](#), task ID #1 (SO_SG Server Group Upgrade) is an ASG task, while task ID #2 is the corresponding individual server upgrade task. When the ASG task is selected (highlighted in green), the **Cancel** button is enabled. Canceling the ASG task affects only the ASG task. It has no effect on the individual server upgrade tasks that were started by the ASG task (that is, task ID #2 in [Figure 7-1](#)). Because the ASG task is canceled, no new server upgrade is initiated by the task.

Figure 7-1 Server Group Upgrade Active Tasks

Main Menu: Status & Manage -> Tasks -> Active Tasks

Filter ▾

NO1	NO2	SO1	SO2	DP1	DP2
ID	Name	Status	Start Time	Update Time	
2	SO1 Server Upgrade (in SO_SG Server Group Upgrade)	running	2015-03-02 11:44:42 EST	2015-03-02 11:54:00 EST	
1	SO_SG Server Group Upgrade	running	2015-03-02 11:44:32 EST	2015-03-02 11:47:47 EST	
0	Pre-upgrade full backup	completed	2015-02-27 19:59:06 EST	2015-02-27 20:00:46 EST	

Pause Restart **Cancel** Delete Report Delete All Completed Delete All Exception

If a server fails upgrade, the server automatically rolls back to the previous release in preparation for backout_restore and fault isolation. Any other servers in that server group, which are in the process of upgrading, continue to upgrade to completion; however, the ASG task itself is automatically canceled and no other servers in that server group are upgraded. Canceling the ASG task provides an opportunity for troubleshooting to correct the problem. Once the problem is corrected, the server group upgrade can be restarted by initiating a new server group upgrade on the upgrade screen.

7.2 Site Accept

Before SDS 8.0, the customer was required to “Accept” the upgrade of individual servers in each server group of a site. While the Accept is a relatively quick operation, it could nonetheless be a tedious task for larger sites with numerous servers. In DSR 8.0, a new feature has been added to make the upgrade Accept much easier for all customers, large and small.

The **Site Accept** button on the upgrade screen provides the capability to nearly simultaneously accept the upgrade of some or all servers for a given site. When the button is selected, a subsequent screen displays the servers that are ready for the Accept action.

Figure 7-2 Site Accept Button

A check box on the Upgrade Site Accept screen allows for the selective application of the Accept action. However, normal procedure calls for the Accept to be applied to all of the servers at a site only after the upgrade to the new release is stable and the back out option is no longer needed. After verifying the information presented is accurate, clicking the **OK** button results in a confirmation screen that requires action. Confirming the action causes the server upgrade to be accepted.

The Accept command is issued to the site servers at a rate of approximately one server every second. The command takes approximately 10 seconds per server to complete. As the commands are completed, the server status on the Upgrade Administration screen transitions to **Backup Needed**.

Figure 7-3 Site Accept Screen

Main Menu: Administration -> Software Management -> Upgrade [Site Accept]

Server group	☒ Action	Server(s) which are Pending Accept
SOSG	☒ Accept upgrade	SDS-SO2

Ok Cancel

8

Primary or DR SDS NOAM Upgrade Execution

Inform [#unique_15/unique_15_Connect_42_GUID-AAD93B71-B4B8-4F1C-83E5-16C9C91CC52E](#) about your plans to upgrade the system before executing the upgrade.

Before upgrading, users must perform the system Health Check in [#unique_22/unique_22_Connect_42_GUID-8C8E13D3-8EA1-4275-8DF2-94BF4D450E98](#). This check ensures the system to be upgraded is in an upgrade-ready state. Performing the system health check determines which alarms are present in the system and if the upgrade can proceed with alarms.

Note

If there are servers in the system, which are not in a Normal state, these servers should be brought to the **Normal** or **Application Disabled** state before the upgrade process starts. The sequence of upgrade is such that servers providing support services to other servers are upgraded first.

Note

If a procedural step fails to run successfully or fails to receive the desired output, **STOP** the procedure. It is recommended to contact [#unique_15/unique_15_Connect_42_GUID-AAD93B71-B4B8-4F1C-83E5-16C9C91CC52E](#) for assistance before attempting to continue.

Procedure completion times shown are estimates. Times may vary due to differences in database size, user experience, and user preparation.

Where possible, command response outputs are displayed as accurately as possible. EXCEPTIONS are as follows:

- Session banner information such as time and date.
- System-specific configuration information such as hardware locations, IP addresses, and host names.
- ANY information marked with **XXXX** or **YYYY**. Where appropriate, instructions are provided to determine what output should be expected in place of **XXXX** or **YYYY**.
- Aesthetic differences unrelated to functionality such as browser attributes: window size, colors, tool bars, and button layouts.

After completing each step and at each point where data is recorded from the screen. Procedures which have run multiple times and each additional iteration that the step has performed is noted.

Retention of captured data is required as a future support reference if this procedure is executed by someone other than Oracle's Customer Care Center.

Note

To minimize possible impacts due to database schema changes, primary and DR SDS network elements must be upgraded within the same maintenance window.

8.1 Perform Health Check (Primary or DR NOAM Pre- upgrade)

This procedure is part of software upgrade preparation and is used to determine the health and status of the entire SDS network and servers. This may have run multiple times, but must also be run at least once within the period of 24-36 hours before starting a maintenance window.


- Run SDS Health Check procedures as specified in [#unique_22/unique_22_Connect_42_GUID-8C8E13D3-8EA1-4275-8DF2-94BF4D450E98](#)
- Upgrade the Primary SDS NOAM, this procedure is used to upgrade the SDS NOAM servers.

Note

The order of the upgrade for the primary NOAM NE and DR NOAM NE needs to be followed as shown in [Table 3-7](#). See section [#unique_42/unique_42_Connect_42_GUID-6E72869C-2C03-4E2C-9219-A081400D5066](#) for more details before proceeding.

1. Log in to the SDS NOAM GUI, use the VIP address to access the primary SDS NOAM GUI as described in [#unique_43/unique_43_Connect_42_GUID-FA5B2F0E-069F-4C52-99A4-1B05C9FAF6E9](#).
2. In the Primary SDS NOAM VIP GUI, expand **Status & Manage** click **HA**
3. Click **Filter**

Figure 8-1 Filter

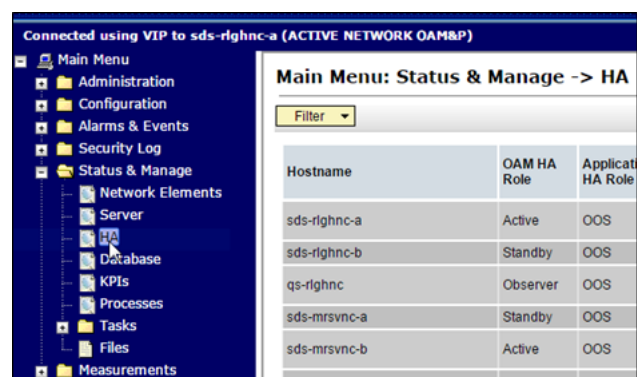

4. Locate the primary SDS NOAM NE, using the information provided in section [#unique_33/unique_33_Connect_42_GUID-CCE8D7F5-9E19-4F82-B343-622722BDD7C3](#), select the primary SDS NOAM Network Element from the **Scope** field. Click **Go**.

Figure 8-2 Scope

Main Menu: Status & Manage -> HA

Filter

Filter

Scope: NO_RLGHNC - Server Group - Reset

Server Role: - All - Reset

Display Filter: - None - = Reset

Go

5. Identify servers and record server names, identify each server by Host name, Server Role, and OAM HA Role and record the name of each server.

Figure 8-3 Identify Server

Main Menu: Status & Manage -> HA (Filtered)

Filter

Hostname	OAM HA Role	Application HA Role	Max Allowed HA Role	Mate Hostname List	Network Element	S
sds-rlghnc-a	Active	OOS	Active	sds-rlghnc-b	NO_RLGHNC	N
sds-rlghnc-b	Standby	OOS	Active	sds-rlghnc-a	NO_RLGHNC	N
qs-rlghnc	Observer	OOS	Observer	sds-rlghnc-a sds-rlghnc-b	NO_RLGHNC	Q

Note the following information:

- Active Primary SDS NOAM.
 - Standby Primary SDS NOAM.
 - Primary Query Server (if equipped).
6. Expand **SDS** select **Configuration** click **Options**.

Figure 8-4 Options

Connected using VIP to sds-aruba-a (ACTIVE NETWORK OAM&P)

Main Menu: SDS -> Configuration -> Options

Apply

Variable	
Display Command Output	☒
Allow Connections	☒
Max Transaction Size	50
Log Provisioning Messages	☒

7. Locate the **Remote Import Enabled** check box and record the pre-upgrade state.

Figure 8-5 Remote Import Enabled

Transaction Durability Timeout	5 seconds
Remote Import Enabled	☒
Remote Import Mode	Non-Blocking

8. Un-check the **Remote Import Enabled** check box if it was checked previously.

Figure 8-6 Uncheck

Transaction Durability Timeout	5 seconds
Remote Import Enabled	☐
Remote Import Mode	Non-Blocking ▼

9. Apply the changes and verify the same.

Figure 8-7 Apply

Main Menu: SDS -> Configuration -> Options

Apply

10. Verify the successful response in the banner.

Figure 8-8 Success Banner

Main Menu: SDS -> Configuration -> Options

i Success!
Update successful.

Apply

11. Upgrade the Standby Primary SDS NOAM server, upgrade the Standby Primary SDS NOAM server (as identified and recorded in [step 5](#) of this procedure) using [#unique_62/unique_62_Connect_42_GUID-97AD59AA-540D-41D5-8D2B-F87B033E5B2C](#).
12. Access the active primary SDS NOAM, use the VIP address to log into the active primary SDS NOAM with the admusr account.

```
sds-rlghnc-a login: admusr
Password: <admusr_password>
*** TRUNCATED OUTPUT ***
RELEASE=6.4
RUNID=00
VPATH=/var/TKLC/rundb:/usr/TKLC/appworks:/usr/TKLC/awpcommon:/usr/TKLC/
comagent-gui:/usr/TKLC/comagent-gui:/usr/TKLC/comagent:/usr/TKLC/sds
PRODPATH=/opt/comcol/prod
RUNID=00
```

13. 1. Verify if the **DbReplication** status is **Active** for the **Standby Primary SDS NOAM** and **Query Server**, if equipped.

```
[admusr@sds-rlghnc-a ~]$ sudo irepstat -w
-- Policy 0 ActStb [DbReplication]
```

```

AA To sds-rlghnc-b      Active 0 0.25 1%R 0.05%cpu 47B/s
AA To qs-rlghnc        Active 0 0.25 1%R 0.05%cpu 56B/s
AA To sds-mrsvnc-a     Active 0 0.50 1%R 0.04%cpu 47B/s
AB To kauai-sds-S0-b   Active 0 0.50 1%R 0.04%cpu 63B/s
AB To florence-sds-S0-a Active 0 0.51 1%R 0.03%cpu 65B/s
AB To turks-sds-S0-b   Active 0 0.50 1%R 0.04%cpu 65B/s
irepstat ( 8 lines) (h)elp

```

14. 2. If a **DbReplication** status is received as **Audit**, then repeat the command until **Active** status is returned.

Note

Do not proceed until the status is **Active**. Check Replication is showing as Active for the standby primary SDS NOAM, Query server, active DR SDS NOAM, and standby DR SDS NOAM (if equipped).

15. Repeat the step until the status is **Active** for all the mentioned servers.

Note

If a **DbReplication** status is received as **Audit** or some other value for these servers, repeat this step until a status of **Active** is returned. Servers are:

- Standby Primary SDS NOAM
- Query Server
- Active DR SDS NOAM
- Standby DR SDS NOAM

Contact [#unique_15/unique_15_Connect_42_GUID-AAD93B71-B4B8-4F1C-83E5-16C9C91CC52E](#) for any assistance.

16. Exit the CLI prompt for the Active Primary SDS NOAM.


```

[admusr@sds-rlghnc-a filemgmt]$ exit
logout

```


17. Access the primary SDS NOAM GUI, use the VIP address to access the primary SDS NOAM GUI as described in [#unique_43/unique_43_Connect_42_GUID-FA5B2F0E-069F-4C52-99A4-1B05C9FAF6E9](#).
18. In the Primary SDS NOAM VIP, edit the server. Expand **Status & Manage** click **HA**.
19. Click **Edit**.

Figure 8-9 Edit Server

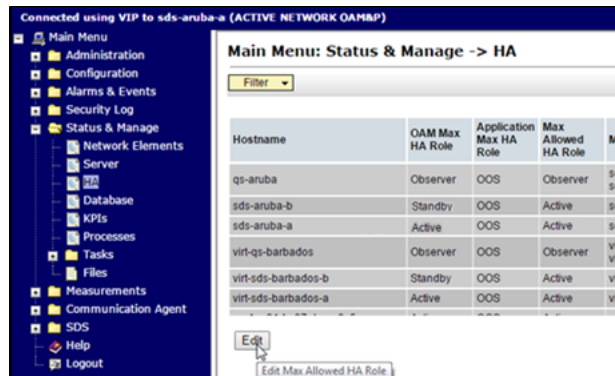

20. Change Max Allowed HA Role status, select the **Active Primary SDS NOAM** server and change a **Max Allowed HA Role** value from **Active** to **Standby**.

Figure 8-10 Standby

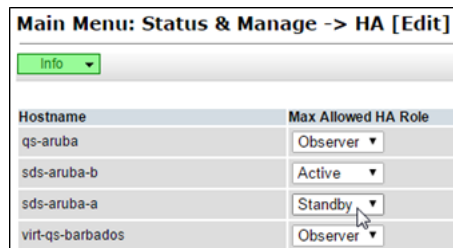

Click **OK**. The users GUI session ends as the active primary SDS server goes through HA fail over and becomes the standby server.

21. 3. If an automatic log out of the GUI does not happen, click **Logout** to log out of the SDS NOAM GUI.

Figure 8-11 Log out



22. In the Primary SDS NOAM VIP (GUI), clear cached data. JavaScript libraries, images, and other objects are often modified in the upgrade. Browsers can sometimes cause GUI problems by holding on to the old objects in the built-in cache. To prevent these problems, always clear the browser cache before logging into an OAM GUI that has just been upgraded.

Follow this procedure:

- a. Simultaneously press and hold the **Ctrl**, **Shift**, and **Delete** keys (most Web browsers).
- b. Select the appropriate object types to delete from the cache (for example, **Temporary Internet Files**, **Cache**, or **Cached images and files**, so on). Other browsers may label these objects differently.


- c. Clear the cached data.

 Note

Do NOT proceed until the browser cache has been cleared.


23. Log in to the SDS NOAM GUI, use the VIP address to access the primary SDS NOAM GUI as described in [#unique_43/unique_43_Connect_42_GUID-FA5B2F0E-069F-4C52-99A4-1B05C9FAF6E9](#).
24. In the Primary SDS NOAM VIP, edit the server. Expand **Status & Manage** click **HA**.
25. Click **Edit**.

Figure 8-12 Edit Server

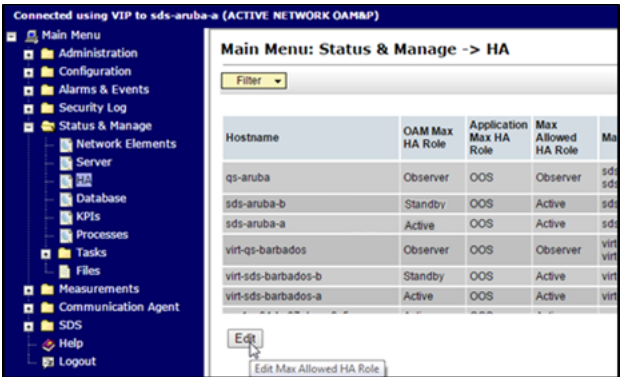

26. Change Max Allowed HA Role status, select the **Standby Primary SDS NOAM** server and change a **Max Allowed HA Role** value from **Standby** to **Active** .

Figure 8-13 Active

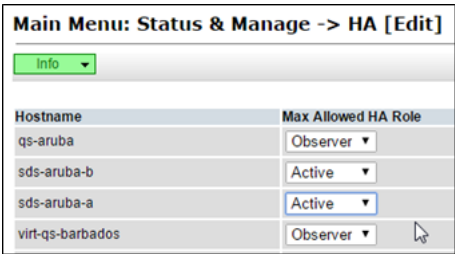

Click **OK**.

27. In the Primary SDS NOAM VIP, verify the change to Active state. Verify the **Max Allowed HA Role** value has been updated to **Active** for the **Standby Primary SDS NOAM** server.

Figure 8-14 Max Allowed HA Role

Hostname	OAM Max HA Role	Application Max HA Role	Max Allowed HA Role	Mat
qs-aruba	Observer	OOS	Observer	sds sds
sds-aruba-b	Active	OOS	Active	sds
sds-aruba-a	Standby	OOS	Active	sds
virt-qs-barbados	Observer	OOS	Observer	virt- virt-

28. If the server in topology shows as an **Out of Service** state, perform a **CmHA** restart, otherwise, proceed to the next step. Refer to [#unique_65/unique_65_Connect_42_GUID-BD322B09-23C5-4EC8-8755-E462D549099B](#) for more information.

Note

You will see Out of Service state on the server on which **CmHA** restart is performed. Ignore this state and continue with the upgrade.

29. Upgrade the current Standby Primary SDS NOAM server (as identified and recorded in [step 5](#) of this procedure) using [#unique_62/unique_62_Connect_42_GUID-97AD59AA-540D-41D5-8D2B-F87B033E5B2C](#).
30. Upgrade the Primary Query server (as identified and recorded in [step 5](#) of this procedure) using [#unique_62/unique_62_Connect_42_GUID-97AD59AA-540D-41D5-8D2B-F87B033E5B2C](#).

Note

If the Query server status is not reported on the **Status and Manage** server screen, refer to [#unique_66/unique_66_Connect_42_GUID-E2F4FC31-74B0-4B73-9661-6A869B9E6E6C](#) for more details.

31. Verify status, perform a replication check as explained in [step 13](#).

Note

The replication link between the primary and secondary (DR-NO site) server is broken at this point until the DR-NO servers are upgraded completely.

32. Proceed to [step 42](#) for remote import.
33. In the Primary SDS NOAM VIP (CLI), log in using the VIP address, log into the **Active Primary SDS NOAM** with the admusr account.

```
sds-rlghnc-a login: admusr
Password: <admusr_password>
*** TRUNCATED OUTPUT ***
RELEASE=6.4
RUNID=00
VPATH=/var/TKLC/rundb:/usr/TKLC/appworks:/usr/TKLC/awpcommon:/usr/TKLC/
comagent-gui:/usr/TKLC/comagent-gui:/usr/TKLC/comagent:/usr/TKLC/sds
```

```
PRODPATH=/opt/comcol/prod
RUNID=00
```

34. Verify the **DbReplication** status is **Active** for the **Standby Primary SDS NOAM, Query Server, Active DR SDS NOAM**, and **Standby NOAM servers** (if equipped).

```
[admusr@sds-rlghnc-a ~]$ sudo irepstat -w
-- Policy 0 ActStb [DbReplication]
AA To sds-rlghnc-b      Active  0  0.25 1%R 0.05%cpu 47B/s
AA To qs-rlghnc        Active  0  0.25 1%R 0.05%cpu 56B/s
AA To sds-mrsvnc-a     Active  0  0.50 1%R 0.04%cpu 47B/s
AB To kauai-sds-S0-b   Active  0  0.50 1%R 0.04%cpu 63B/s
AB To florence-sds-S0-a Active  0  0.51 1%R 0.03%cpu 65B/s
AB To turks-sds-S0-b   Active  0  0.50 1%R 0.04%cpu 65B/s
irepstat ( 8 lines) (h)elp
```

35. Repeat the step until the status is **Active** for all mentioned servers.

Note

If a DbReplication status is received as **Audit** or some other value for these servers, repeat this step until a status of **Active** is returned. Servers are:

- Standby Primary SDS NOAM
- Query Server
- Active DR SDS NOAM
- Standby DR SDS NOAM

Contact [#unique_15/unique_15_Connect_42_GUID-AAD93B71-B4B8-4F1C-83E5-16C9C91CC52E](#) for assistance.

36. Exit the CLI for the Active Primary SDS NOAM.

```
[admusr@sds-rlghnc-a filemgmt]$ exit
logout
```

37. Verify the **DbReplication** status is **Active** for the **Standby Primary SDS NOAM, Query Server, DR Site Active**, and **Standby NOAM servers** (if equipped).
38. Repeat [step 13](#) to [step 16](#) to verify **irepstat** is showing Active.
39. Ensure the replication is **Active** for the **Standby Primary SDS NOAM, Query Server, Active DR SDS NOAM**, and **Standby DR SDS NOAM servers** (if equipped).
40. If the server in topology shows as an Out of Service state, perform a **CmHA** restart; otherwise, proceed to the next step. Refer [#unique_65/unique_65_Connect_42_GUID-BD322B09-23C5-4EC8-8755-E462D549099B](#) for more information.

Note

You will see Out of Service state on the server on which **CmHA** restart is performed. Ignore this state and continue with the upgrade.


41. In the Primary SDS NOAM VIP, verify status. Perform a replication check as explained in [step 34](#).

Note

The replication link between the primary and secondary (DR-NO site) server is broken at this point until the DR-NO servers are upgraded completely.


42. In the Primary SDS NOAM VIP, re-enable provisioning Remote Import (if applicable). Re-enable the **Remote Import Enabled** check box if the check box recorded in [step 7](#) of this procedure was Checked. If the **Remote Import Enabled** check box recorded in [step 7](#) of this procedure was not checked, then this procedure is complete.
43. Expand **SDS** select **Configuration** click **Options**

Figure 8-15 Options

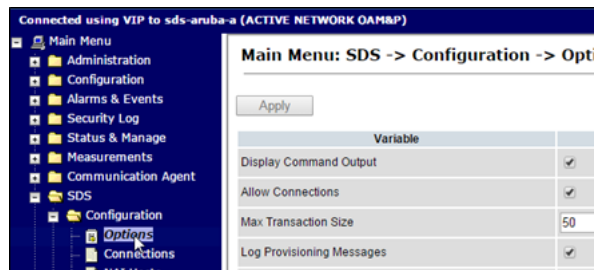


44. Locate the **Remote Import Enabled** check box and check mark it.

Figure 8-16 Remote Import Enabled

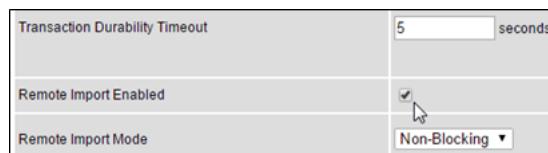

45. In the Primary SDS NOAM VIP, apply change and verify. Click **Apply**. Verify the successful response in the banner.

Figure 8-17 Success Banner

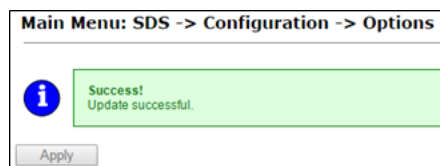


8.2 Upgrade DR SDS NOAM

This procedure upgrades the DR SDS NOAM servers.


Note

The order of the upgrade for the primary NOAM NE and DR NOAM NE needs to be followed as shown in [Table 3-7](#). See section [#unique_42/unique_42_Connect_42_GUID-6E72869C-2C03-4E2C-9219-A081400D5066](#) for more details before proceeding.

1. Log in to the SDS NOAM GUI, use the VIP address to access the primary SDS NOAM GUI as described in [#unique_43/unique_43_Connect_42_GUID-FA5B2F0E-069F-4C52-99A4-1B05C9FAF6E9](#).
2. In the Primary SDS NOAM VIP GUI, record name of DR SDS NE site. Expand **Status & Manage** click **HA**
3. Click **Filter**

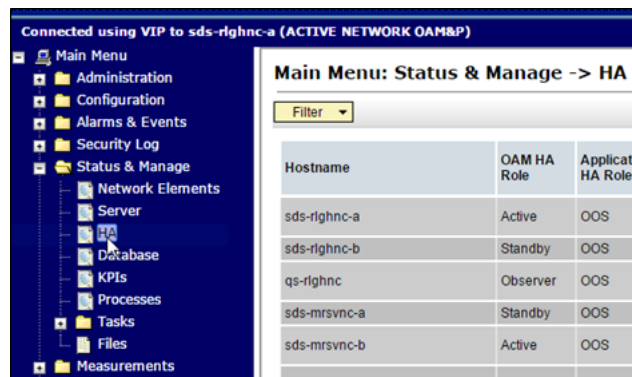Figure 8-18 Filter

4. In the primary SDS NOAM NE list servers, using the information provided in section [#unique_33/unique_33_Connect_42_GUID-CCE8D7F5-9E19-4F82-B343-622722BDD7C3](#), select the DR SDS NOAM Network Element from the **Scope** field. Click **Go**.

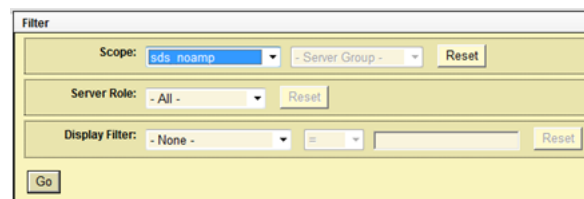Figure 8-19 Scope

5. Identify servers and record server names, identify each server by Host name, Server Role, and OAM HA Role and record the name of each server.

Figure 8-20 Identify Server

Hostname	OAM HA Role	Appli catio n HA Role	Max Allowed HA Role	Mate Hostname List	Network Element	Server Role
dts3-sds-a	Active	OOS	Active	dts3-sds-b	sds_noamp	Network OAM&P
dts3-sds-b	Standby	OOS	Active	dts3-sds-a	sds_noamp	Network OAM&P
dts3-qs-1	Observer	OOS	Observer	dts3-sds-a dts3-sds-b	sds_noamp	Query Server

Note the following information:

- Active DR SDS NOAM.
 - Standby DR SDS NOAM.
 - DR SDS Query Server (if equipped)
6. In the Primary SDS NOAM VIP, upgrade the **Standby DR SDS NOAM** server (as identified and recorded in [step 5](#) of this procedure) using [#unique_62/unique_62_Connect_42_GUID-97AD59AA-540D-41D5-8D2B-F87B033E5B2C](#).
 7. The next two steps of this procedure can be run in parallel using the **Upgrade Server** option.
 8. In the Primary SDS NOAM VIP, upgrade the **Active DR SDS NOAM** server (as identified and recorded in [step 5](#) of this procedure) using [#unique_62/unique_62_Connect_42_GUID-97AD59AA-540D-41D5-8D2B-F87B033E5B2C](#).

Note

This causes an HA activity fail over to the mate primary SDS NOAM server. This happens a couple minutes after initiating the upgrade.

9. Upgrade the DR SDS Query server (as identified and recorded in [step 5](#) of this procedure) using [#unique_62/unique_62_Connect_42_GUID-97AD59AA-540D-41D5-8D2B-F87B033E5B2C](#).

8.3 Perform Health Check (Primary or DR NOAM Post Upgrade)

This procedure is used to determine the health and status of the entire SDS network and servers after Primary and DR NOAM upgrade has been completed.

Run SDS Health Check procedures as specified in [#unique_22/unique_22_Connect_42_GUID-8C8E13D3-8EA1-4275-8DF2-94BF4D450E98](#).

8.4 SNMP Configuration Update (Post Primary or DR NOAM Upgrade)

Refer [#unique_69/unique_69_Connect_42_GUID-1FDFF78C-92E5-494E-AA50-34BB3EC697AF](#) to apply SNMP workaround in following cases:

- If SNMP is not configured in SDS.
- If SNMP is already configured and **SNMPv3** is selected as enabled version.

This can be checked by navigating to **Administration** selecting **Remote Servers** and clicking **SNMP Trapping** screen using GUI session of NOAM server VIP IP address.

9

Site Upgrade Execution

This section contains the procedures for upgrading an entire site — starting with the pre-upgrade activities, upgrading the SOAMs and DP servers, and finishing with verifying the upgrade.

Table 9-1 Site Upgrade Planning — Automated vs. Manual Upgrade

Automated	Manual
There are multiple methods available for upgrading a site. The newest and most efficient way to upgrade a site is the Automated Site Upgrade feature. As the name implies, this feature upgrades an entire site (SOAMs and DP servers) with a minimum of user interaction. Once the upgrade is initiated, the upgrade automatically prepares the server(s), performs the upgrade, and sequences to the next server or group of servers until all servers in the site are upgraded. The server upgrades are sequenced in a manner that preserves data integrity and processing capacity. Automated Site Upgrade can be used to upgrade the SOAM and DP servers.	A manual upgrade affords the maximum level of control over upgrade sequencing and intermediate observations. With this method, the upgrade of each server is individually initiated, allowing the user to control the level of parallelism and speed of the upgrade.
 Note A site upgrade can include a combination of Automated Server Group upgrade and manual upgrades to improve efficiency. For example, SOAMs can be upgraded with Automated Server Group or Manual upgrade, while the DPs may be upgraded manually to control the order of upgrade for traffic continuity.	
The Automated Site Upgrade procedures are in #unique_56/unique_56_Connect_42_GUID-940F4C57-5395-453B-BCA1-B000E977DF6E .	The manual site upgrade procedures are in section #unique_71/unique_71_Connect_42_GUID-F8F09B6E-0343-4730-A91C-92446FFF4749

9.1 Automated Site Upgrade

Before executing this procedure, contact [#unique_15/unique_15_Connect_42_GUID-AAD93B71-B4B8-4F1C-83E5-16C9C91CC52E](#).

Before upgrading, users must perform the system Health Check as described in [#unique_22/unique_22_Connect_42_GUID-8C8E13D3-8EA1-4275-8DF2-94BF4D450E98](#). This check ensures the system to be upgraded is in an upgrade-ready state. Performing the system health check determines which alarms are present in the system and if the upgrade can proceed with alarms.

Note

If there are servers in the system, which are not in a **Normal** state, these servers should be brought to the **Normal** or **Application Disabled** state before the upgrade process starts. The sequence of upgrade is such that servers providing support services to other servers are upgraded first.

Note

If a procedural step fails to run successfully or fails to receive the desired output, **STOP** the procedure. It is recommended to contact [#unique_15/unique_15_Connect_42_GUID-AAD93B71-B4B8-4F1C-83E5-16C9C91CC52E](#) for assistance before attempting to continue.

Procedure completion times shown are estimates. Times may vary due to differences in database size, user experience, and user preparation.

Where possible, command response outputs are shown as accurately as possible. EXCEPTIONS are as follows:

- Session banner information such as time and date.
- System-specific configuration information such as hardware locations, IP addresses, and host names.
- ANY information marked with **XXXX** or **YYYY**. Where appropriate, instructions are provided to determine what output should be expected in place of **XXXX** or **YYYY**.
- Aesthetic differences unrelated to functionality such as browser attributes: window size, colors, tool bars, and button layouts.

After completing each step and at each point where data is recorded from the screen, the technician performing the upgrade logs the information. For procedures, which are run multiple times, the technician has to keep a track of each additional iteration performed.

Retention of captured data is required as a future support reference if this procedure is run by someone other than Oracle's Customer Care Center.

Note

For large systems containing multiple signaling network elements, it may not be feasible to apply the software upgrade to every network element within a single maintenance window.

9.1.1 Perform Health Check (Pre-Upgrade)

This procedure is part of software upgrade preparation and is used to determine the health and status of the entire SDS network and servers. This may have run multiple times, it must run at least once within the period of 24-36 hours before starting a maintenance window.

Run SDS Health Check procedures as specified in [#unique_22/unique_22_Connect_42_GUID-8C8E13D3-8EA1-4275-8DF2-94BF4D450E98](#).

9.1.2 Upgrade SOAM

The following procedure details how to upgrade SDS SOAM sites.

① Note


When upgrading an SDS topology, it is permissible to upgrade multiple SOAM sites in parallel. However, every attempt should be made to avoid upgrading mated SOAM sites in the same maintenance window.

1. This step verifies the servers and server groups to be upgraded are in the proper state. Review site upgrade plan and site readiness.
 - a. Log into the NOAM GUI using the VIP.
 - b. Expand **Administration** select **Software Management** click **Upgrade**.
 - c. Select the SOAM tab of the site to be upgraded.
 - d. Verify the **Entire Site** link is selected.

The Entire Site screen provides a summary of the server states and upgrade readiness. More detailed server status is available by selecting a specific server group link.

Figure 9-1 Upgrade

Main Menu: Administration -> Software Management -> Upgrade

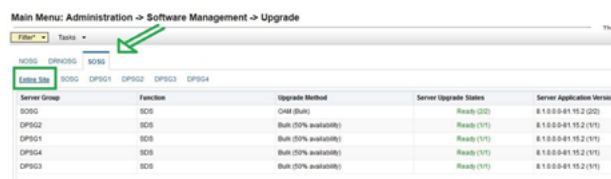

Server Group	Function	Upgrade Method	Server Upgrade Status	Server Application Versions
SOBG	SOB	CMR (BUI)	Ready (2/2)	8.1.0.0-81.10.2 (2/2)
DPISG2	SOB	Build (50% available)	Ready (1/1)	8.1.0.0-81.10.2 (1/1)
DPISG1	SOB	Build (50% available)	Ready (1/1)	8.1.0.0-81.10.2 (1/1)
DPISG4	SOB	Build (50% available)	Ready (1/1)	8.1.0.0-81.10.2 (1/1)
DPISG3	SOB	Build (50% available)	Ready (1/1)	8.1.0.0-81.10.2 (1/1)

① Note

The Site Upgrade option can be used to upgrade an entire site, or a subset of site elements. The servers within the site may be in various states of readiness, including **Accept or Reject**, **Ready**, **Backup Needed**, **Failed**, or **Not Ready**. Only the servers in the Ready state or Failed state are upgrade eligible.

2. In the Active NOAM VIP, initiate the site upgrade. Verify no Server Groups are selected on the upgrade administration screen. The **Site Upgrade** button is not available if a Server Group is selected. Click **Site Upgrade**.

Review the upgrade plan as presented on the Site Initiate screen. This plan represents an approximation of how the servers will be upgraded. Due to the dynamic nature of upgrade, some servers (typically only C-level) may be upgraded in a different cycle than displayed here.

Figure 9-2 Upgrade

Main Menu: Administration -> Software Management -> Upgrade [Site Initiate]

Info

Cycle	Action	Servers															
1	Upgrade	<table><thead><tr><th>Server Group</th><th>Server</th><th>Function</th><th>Method</th><th>Version</th></tr></thead><tbody><tr><td>SOBG</td><td>SDS-SO2</td><td>Standby</td><td>SDS</td><td>OAM (Bulk)</td><td>8.1.0.0-81.15.2</td></tr></tbody></table>	Server Group	Server	Function	Method	Version	SOBG	SDS-SO2	Standby	SDS	OAM (Bulk)	8.1.0.0-81.15.2				
Server Group	Server	Function	Method	Version													
SOBG	SDS-SO2	Standby	SDS	OAM (Bulk)	8.1.0.0-81.15.2												
2	Upgrade	<table><thead><tr><th>Server Group</th><th>Server</th><th>Function</th><th>Method</th><th>Version</th></tr></thead><tbody><tr><td>SOBG</td><td>SDS-SO</td><td>Active</td><td>SDS</td><td>OAM (Bulk)</td><td>8.1.0.0-81.15.2</td></tr></tbody></table>	Server Group	Server	Function	Method	Version	SOBG	SDS-SO	Active	SDS	OAM (Bulk)	8.1.0.0-81.15.2				
Server Group	Server	Function	Method	Version													
SOBG	SDS-SO	Active	SDS	OAM (Bulk)	8.1.0.0-81.15.2												
3	Upgrade	<table><thead><tr><th>Server Group</th><th>Server</th><th>Function</th><th>Method</th><th>Version</th></tr></thead><tbody><tr><td>DPBG1</td><td>SDS-DP1</td><td>SDS</td><td>Bulk (50% availability)</td><td>8.1.0.0-81.15.2</td></tr><tr><td>DPBG2</td><td>SDS-DP2</td><td>SDS</td><td>Bulk (50% availability)</td><td>8.1.0.0-81.15.2</td></tr></tbody></table>	Server Group	Server	Function	Method	Version	DPBG1	SDS-DP1	SDS	Bulk (50% availability)	8.1.0.0-81.15.2	DPBG2	SDS-DP2	SDS	Bulk (50% availability)	8.1.0.0-81.15.2
Server Group	Server	Function	Method	Version													
DPBG1	SDS-DP1	SDS	Bulk (50% availability)	8.1.0.0-81.15.2													
DPBG2	SDS-DP2	SDS	Bulk (50% availability)	8.1.0.0-81.15.2													
4	Upgrade	<table><thead><tr><th>Server Group</th><th>Server</th><th>Function</th><th>Method</th><th>Version</th></tr></thead><tbody><tr><td>DPBG3</td><td>SDS-DP3</td><td>SDS</td><td>Bulk (50% availability)</td><td>8.1.0.0-81.15.2</td></tr><tr><td>DPBG4</td><td>SDS-DP4</td><td>SDS</td><td>Bulk (50% availability)</td><td>8.1.0.0-81.15.2</td></tr></tbody></table>	Server Group	Server	Function	Method	Version	DPBG3	SDS-DP3	SDS	Bulk (50% availability)	8.1.0.0-81.15.2	DPBG4	SDS-DP4	SDS	Bulk (50% availability)	8.1.0.0-81.15.2
Server Group	Server	Function	Method	Version													
DPBG3	SDS-DP3	SDS	Bulk (50% availability)	8.1.0.0-81.15.2													
DPBG4	SDS-DP4	SDS	Bulk (50% availability)	8.1.0.0-81.15.2													

Upgrade Settings

Upgrade ISO: SDS-8.1.0.0-81.16.0-x86_64.iso Select the desired upgrade ISO media file.

Note

If you need to rearrange the upgrade cycle, see section [#unique_74/unique_74_Connect_42_GUID-00586CC1-D083-4D80-BCED-3B4B7C79D4CA](#).

- 3. In the Upgrade Settings section of the form, use the **Upgrade ISO** option to select the target ISO. Click **OK** to start the upgrade sequence. Control returns to the Upgrade Administration screen.
- 4. In the Active NOAM VIP, view In-Progress Status. In **View the Upgrade Administration** form Monitor the upgrade progress. See [step 5](#) of this procedure for instructions if the upgrade fails or if execution time exceeds 60 minutes.

Note

If the upgrade processing encounters a problem, it may attempt to ROLL BACK to the original software release. In this case, the upgrade shows as **Failed**. The execution time may be shorter or longer, depending on the point in the upgrade where there was a problem.

With the **Entire Site** link selected, a summary of the upgrade status for the selected site displays. This summary identifies the server group(s) currently upgrading, the number of servers within each server group that are upgrading, and the number of servers that are pending upgrade. This view can be used to monitor the upgrade status of the overall site.

Figure 9-3 Monitor Progress

Main Menu: Administration -> Software Management -> Upgrade

Filter Tasks

NOBG DRBG2BG SOBG

Entire Site	SOBG	DPBG1	DPBG2	DPBG3	DPBG4
Server Group	SOBG	DPBG1	DPBG2	DPBG3	DPBG4
Function	SDS	SDS	SDS	SDS	SDS
Upgrade Method	OAM (Bulk)	Bulk (50% availability)	Bulk (50% availability)	Bulk (50% availability)	Bulk (50% availability)
Server Upgrade Status	Pending (1/2) Upgrading (1/2)	Pending (1/1)	Pending (1/1)	Pending (1/1)	Pending (1/1)
Server Application Versions	8.1.0.0-81.15.2 (2/2)	8.1.0.0-81.15.2 (1/1)	8.1.0.0-81.15.2 (1/1)	8.1.0.0-81.15.2 (1/1)	8.1.0.0-81.15.2 (1/1)

More detailed status is available by selecting the individual server group links. The server group view shows the status of each individual server within the selected server group. During the upgrade, the servers may have some or all of the following expected alarms.

Note

Not all servers have all alarms: **Alarm ID = 10073 (Server Group Max Allowed HA Role Warning)**

- Alarm ID = 10075 (The server is no longer providing services because application processes have been manually stopped)
- Alarm ID = 31101 (DB Replication To Slave Failure)
- Alarm ID = 31106 (DB Merge To Parent Failure)
- Alarm ID = 31107 (DB Merge From Child Failure)
- Alarm ID = 31228 (HA Highly available server failed to receive mate heartbeats) or (Lost Communication with Mate Server)
- Alarm ID = 31233 (HA Secondary Path Down)
- Alarm ID = 31283 (Highly available server failed to receive mate heartbeats)
- Alarm ID = 32515 (Server HA Fail over Inhibited)
- Alarm ID = 31114 (DB Replication over SOAP has failed)
- Alarm ID = 31225 (HA Service Start Failure)

Do not accept any upgrades at this time.

Contact [#unique_15/unique_15_Connect_42_GUID-AAD93B71-B4B8-4F1C-83E5-16C9C91CC52E](#) for any assistance. Refer [#unique_75/unique_75_Connect_42_GUID-487E319D-1191-442F-B566-E1C9643DFEFD](#) for failed server recovery procedures.

5. Upon completion of a successful upgrade, every server in the site is in the **Accept** or **Reject** state.

Figure 9-4 Server State

Main Menu: Administration -> Software Management -> Upgrade

Hostname	Upgrade Status	Server Role	Application Version	Start Time	Finish Time
SDS-502	Accept or Reject	System-CHM	8.1.0.0-81.15.0	2017-05-25 04:50:13 EDT	2017-05-25 05:13:03 EDT
SDS-50	Warn	SO_DSPR_ML_NE	8.1.0.0-81.15.2		

6. In the Server CLI, if the upgrade of a server fails, access the server command line (using SSH or a console), and collect the following files:
 - /var/TKLC/log/upgrade/upgrade.log
 - /var/TKLC/log/upgrade/ugwrap.log
 - /var/TKLC/log/upgrade/earlyChecks.log
 - /var/TKLC/log/platcfg/platcfg.log

Contact [#unique_15/unique_15_Connect_42_GUID-AAD93B71-B4B8-4F1C-83E5-16C9C91CC52E](#) for assistance. Refer to [Upgrade Server Administration on SDS 9.0](#) for failed server recovery procedures.

- Update the tuned profile, after successful upgrade has been verified above, access each of the servers on command line (using SSH or console), and update the tuned profile:

```
$ sudo /usr/TKLC/sds/bin/sdsSharedMemTuned.sh
```

Verify whether tuned profile has been successfully set to **comcol_app**:

```
$ sudo tuned-adm active
```

Sample Output:

```
[admusr@SOAM1 ~]$ sudo tuned-adm active
Current active profile: comcol_app
Service tuned: enabled, running
Service ktune: enabled, running
[admusr@SOAM1 ~]$
```

9.1.3 Rearrange Automate Site Upgrade Cycles

This procedure provides the details to rearrange the Automated Site Upgrade cycles if required. Automated Site Upgrade provides an option to rearrange servers in the cycles thus eliminating the risks of a potential network outage. ASU provides the flexibility to user to order the servers within the cycles without breaking the Minimum Availability and DA-MP Leader criteria.

- In the Active NOAM VIP rearrange the upgrade cycle as needed, click **Rearrange Cycles**.

Figure 9-5 Rearrange Cycles

Main Menu: Administration -> Software Management -> Upgrade [Site Initiate]

Info

Cycle	Action	Servers															
1	Upgrade	<table border="1"> <thead> <tr> <th>Server Group</th> <th>Server</th> <th>Function</th> <th>Method</th> <th>Version</th> </tr> </thead> <tbody> <tr> <td>SOSG</td> <td>SOS-SO - Standby</td> <td>SOS</td> <td>OAM (Bulk)</td> <td>8.1.0.0-81.15.2</td> </tr> </tbody> </table>	Server Group	Server	Function	Method	Version	SOSG	SOS-SO - Standby	SOS	OAM (Bulk)	8.1.0.0-81.15.2					
Server Group	Server	Function	Method	Version													
SOSG	SOS-SO - Standby	SOS	OAM (Bulk)	8.1.0.0-81.15.2													
2	Upgrade	<table border="1"> <thead> <tr> <th>Server Group</th> <th>Server</th> <th>Function</th> <th>Method</th> <th>Version</th> </tr> </thead> <tbody> <tr> <td>SOSG</td> <td>SOS-SO2 - Active</td> <td>SOS</td> <td>OAM (Bulk)</td> <td>8.1.0.0-81.15.2</td> </tr> </tbody> </table>	Server Group	Server	Function	Method	Version	SOSG	SOS-SO2 - Active	SOS	OAM (Bulk)	8.1.0.0-81.15.2					
Server Group	Server	Function	Method	Version													
SOSG	SOS-SO2 - Active	SOS	OAM (Bulk)	8.1.0.0-81.15.2													
3	Upgrade	<table border="1"> <thead> <tr> <th>Server Group</th> <th>Server</th> <th>Function</th> <th>Method</th> <th>Version</th> </tr> </thead> <tbody> <tr> <td>DPSG1</td> <td>SOS-OP1</td> <td>SOS</td> <td>Bulk (50% availability)</td> <td>8.1.0.0-81.15.2</td> </tr> <tr> <td>DPSG2</td> <td>SOS-OP2</td> <td>SOS</td> <td>Bulk (50% availability)</td> <td>8.1.0.0-81.15.2</td> </tr> </tbody> </table>	Server Group	Server	Function	Method	Version	DPSG1	SOS-OP1	SOS	Bulk (50% availability)	8.1.0.0-81.15.2	DPSG2	SOS-OP2	SOS	Bulk (50% availability)	8.1.0.0-81.15.2
Server Group	Server	Function	Method	Version													
DPSG1	SOS-OP1	SOS	Bulk (50% availability)	8.1.0.0-81.15.2													
DPSG2	SOS-OP2	SOS	Bulk (50% availability)	8.1.0.0-81.15.2													
4	Upgrade	<table border="1"> <thead> <tr> <th>Server Group</th> <th>Server</th> <th>Function</th> <th>Method</th> <th>Version</th> </tr> </thead> <tbody> <tr> <td>DPSG3</td> <td>SOS-OP3</td> <td>SOS</td> <td>Bulk (50% availability)</td> <td>8.1.0.0-81.15.2</td> </tr> <tr> <td>DPSG4</td> <td>SOS-OP4</td> <td>SOS</td> <td>Bulk (50% availability)</td> <td>8.1.0.0-81.15.2</td> </tr> </tbody> </table>	Server Group	Server	Function	Method	Version	DPSG3	SOS-OP3	SOS	Bulk (50% availability)	8.1.0.0-81.15.2	DPSG4	SOS-OP4	SOS	Bulk (50% availability)	8.1.0.0-81.15.2
Server Group	Server	Function	Method	Version													
DPSG3	SOS-OP3	SOS	Bulk (50% availability)	8.1.0.0-81.15.2													
DPSG4	SOS-OP4	SOS	Bulk (50% availability)	8.1.0.0-81.15.2													

Upgrade Settings

Upgrade ISO: SOS-8.2.0.0_82.2.0-x86_64.iso Select the desired upgrade ISO media file.

Ok Cancel Rearrange Cycles Report

- Click **Rearrange Cycles** on the Upgrade screen to rearrange servers.

Figure 9-6 Upgrade Rearrange Cycles

Main Menu: Administration -> Software Management -> Upgrade [Rearrange Cycles]

Cycle	Available Server	Free Pool							
1	<table border="1"> <thead> <tr> <th>Server</th> <th>Action</th> </tr> </thead> <tbody> <tr> <td>DerSite005OAM00</td> <td> Add To Cycle Remove From Cycle </td> </tr> </tbody> </table>	Server	Action	DerSite005OAM00	Add To Cycle Remove From Cycle				
Server	Action								
DerSite005OAM00	Add To Cycle Remove From Cycle								
2	<table border="1"> <thead> <tr> <th>Server</th> <th>Action</th> </tr> </thead> <tbody> <tr> <td>DerSite00PFE00</td> <td rowspan="4"> Add To Cycle Remove From Cycle </td> </tr> <tr> <td>DerSite00SS7MP00</td> </tr> <tr> <td>DerSite00SS7MP01</td> </tr> <tr> <td>DerSite00SS7MP02</td> </tr> </tbody> </table>	Server	Action	DerSite00PFE00	Add To Cycle Remove From Cycle	DerSite00SS7MP00	DerSite00SS7MP01	DerSite00SS7MP02	
Server	Action								
DerSite00PFE00	Add To Cycle Remove From Cycle								
DerSite00SS7MP00									
DerSite00SS7MP01									
DerSite00SS7MP02									
3	<table border="1"> <thead> <tr> <th>Server</th> <th>Action</th> </tr> </thead> <tbody> <tr> <td>DerSite00PFE01</td> <td rowspan="4"> Add To Cycle Remove From Cycle </td> </tr> <tr> <td>DerSite00SS7MP02</td> </tr> <tr> <td>DerSite00SS7MP03</td> </tr> <tr> <td>DerSite00SS7MP00</td> </tr> </tbody> </table>	Server	Action	DerSite00PFE01	Add To Cycle Remove From Cycle	DerSite00SS7MP02	DerSite00SS7MP03	DerSite00SS7MP00	
Server	Action								
DerSite00PFE01	Add To Cycle Remove From Cycle								
DerSite00SS7MP02									
DerSite00SS7MP03									
DerSite00SS7MP00									

Ok Cancel Add Cycle

- When a server needs to be removed from cycle and needs to be added in an existing cycle or a new cycle, select the desired server in the list and click **Remove from Cycle**. The server moves to the Free Pool on the right side.

Figure 9-7 Remove from Cycle

Main Menu: Administration -> Software Management -> Upgrade [Rearrange Cycles]


Cycle	Available Server	Free Pool							
1	<table border="1"> <thead> <tr> <th>Server</th> <th>Action</th> </tr> </thead> <tbody> <tr> <td>DerSite005OAM00</td> <td> Add To Cycle Remove From Cycle </td> </tr> </tbody> </table>	Server	Action	DerSite005OAM00	Add To Cycle Remove From Cycle	DerSite00SS7MP02 DerSite00SS7MP01			
Server	Action								
DerSite005OAM00	Add To Cycle Remove From Cycle								
2	<table border="1"> <thead> <tr> <th>Server</th> <th>Action</th> </tr> </thead> <tbody> <tr> <td>DerSite00PFE00</td> <td rowspan="4"> Add To Cycle Remove From Cycle </td> </tr> <tr> <td>DerSite00SS7MP00</td> </tr> <tr> <td>DerSite00SS7MP01</td> </tr> <tr> <td>DerSite00SS7MP02</td> </tr> </tbody> </table>	Server	Action	DerSite00PFE00	Add To Cycle Remove From Cycle	DerSite00SS7MP00	DerSite00SS7MP01	DerSite00SS7MP02	
Server	Action								
DerSite00PFE00	Add To Cycle Remove From Cycle								
DerSite00SS7MP00									
DerSite00SS7MP01									
DerSite00SS7MP02									
3	<table border="1"> <thead> <tr> <th>Server</th> <th>Action</th> </tr> </thead> <tbody> <tr> <td>DerSite00PFE01</td> <td rowspan="4"> Add To Cycle Remove From Cycle </td> </tr> <tr> <td>DerSite00SS7MP03</td> </tr> <tr> <td>DerSite00SS7MP00</td> </tr> <tr> <td>DerSite00SS7MP02</td> </tr> </tbody> </table>	Server	Action	DerSite00PFE01	Add To Cycle Remove From Cycle	DerSite00SS7MP03	DerSite00SS7MP00	DerSite00SS7MP02	
Server	Action								
DerSite00PFE01	Add To Cycle Remove From Cycle								
DerSite00SS7MP03									
DerSite00SS7MP00									
DerSite00SS7MP02									

Ok Cancel Add Cycle

Add the servers in Free Pool to another existing cycle or new cycle.

- This step describes how to add a new cycle, if required. If there is no need to add a new cycle, then steps to rearrange the cycle are complete. Click **Add Cycle**.

Figure 9-8 Add Cycle

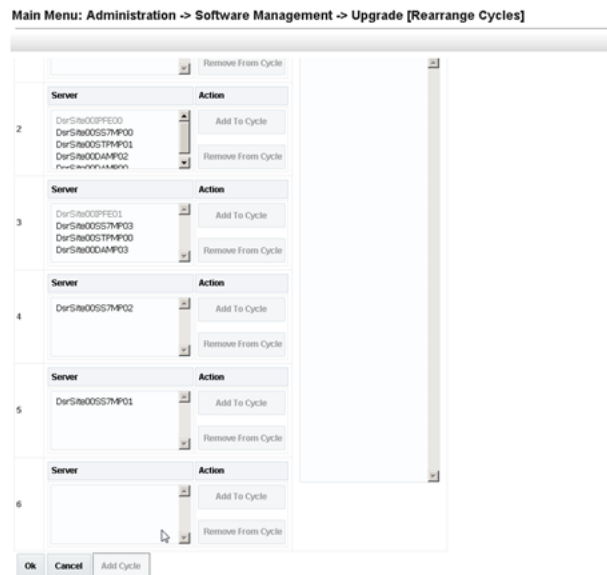

After adding new cycle, servers available in free pool can be added in new cycle.

5. Click **OK**.

9.1.4 Perform Health Check (Post Upgrade)

This procedure is part of software upgrade preparation and is used to determine the health and status of the SDS network and servers. Run SDS Health Check procedures as specified in [#unique_22/unique_22_Connect_42_GUID-8C8E13D3-8EA1-4275-8DF2-94BF4D450E98](#)

9.2 SOAM Upgrade Execution (Manual and Automated Server Group)

Before executing this procedure, contact [#unique_15/unique_15_Connect_42_GUID-AAD93B71-B4B8-4F1C-83E5-16C9C91CC52E](#).

Before upgrading, users must perform the system Health Check as described in [#unique_22/unique_22_Connect_42_GUID-8C8E13D3-8EA1-4275-8DF2-94BF4D450E98](#). This check ensures the system to be upgraded is in an upgrade-ready state. Performing the system health check determines which alarms are present in the system and if the upgrade can proceed with alarms.

Note

If there are servers in the system, which are not in a **Normal** state, these servers should be brought to the **Normal** or **Application Disabled** state before the upgrade process starts. The sequence of upgrade is such that servers providing support services to other servers are upgraded first.

Note

If a procedural step fails to run successfully or fails to receive the desired output, **STOP** the procedure. It is recommended to contact [#unique_15/unique_15_Connect_42_GUID-AAD93B71-B4B8-4F1C-83E5-16C9C91CC52E](#) for assistance before attempting to continue.

Procedure completion times shown are estimates. Times may vary due to differences in database size, user experience, and user preparation.

Where possible, command response outputs are shown as accurately as possible. EXCEPTIONS are as follows:

- Session banner information such as time and date.
- System-specific configuration information such as hardware locations, IP addresses, and host names.
- ANY information marked with **XXXX** or **YYYY**. Where appropriate, instructions are provided to determine what output should be expected in place of **XXXX** or **YYYY**.
- Aesthetic differences unrelated to functionality such as browser attributes: window size, colors, tool bars, and button layouts.

After completing each step and at each point where data is recorded from the screen, the technician performing the upgrade logs the information. For procedures, which are run multiple times, the technician has to keep a track of each additional iteration performed.

Retention of captured data is required as a future support reference if this procedure is run by someone other than Oracle's Customer Care Center.

Note

For large systems containing multiple signaling network elements, it may not be feasible to apply the software upgrade to every network element within a single maintenance window.

9.2.1 Perform Health Check (SOAM Pre-Upgrade)

This procedure is part of software upgrade preparation and is used to determine the health and status of the entire SDS network and servers. This may be run multiple times, but must also be run at least once within the period of 24-36 hours before starting a maintenance window. Run SDS Health Check procedures as specified in [#unique_22/unique_22_Connect_42_GUID-8C8E13D3-8EA1-4275-8DF2-94BF4D450E98](#)


9.2.2 Upgrade SOAM

The following procedure details how to upgrade SDS SOAM sites.

Note


When upgrading an SDS topology, it is permissible to upgrade multiple SOAM sites in parallel. However, every attempt should be made to avoid upgrading mated SOAM sites in the same maintenance window.

1. In the SDS NOAM GUI, log in using the VIP address to access the primary SDS NOAM GUI as described in [#unique_43/unique_43_Connect_42_GUID-FA5B2F0E-069F-4C52-99A4-1B05C9FAF6E9](#)
2. In the Primary SDS NOAM VIP (GUI), record name of the SOAM NE site. Expand **Status & Manage** click **HA**. Click **Filter**.

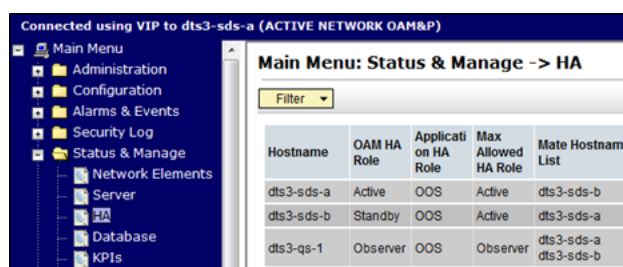Figure 9-9 Filter

Using the information provided in section [#unique_33/unique_33_Connect_42_GUID-CCE8D7F5-9E19-4F82-B343-622722BDD7C3](#) record the name of the SOAM NE site.

3. In the Primary SDS NOAM VIP, list servers. Using the information provided in section [#unique_33/unique_33_Connect_42_GUID-CCE8D7F5-9E19-4F82-B343-622722BDD7C3](#) select the primary SDS SOAM Network Element from the **Scope** field. Click **Go**.

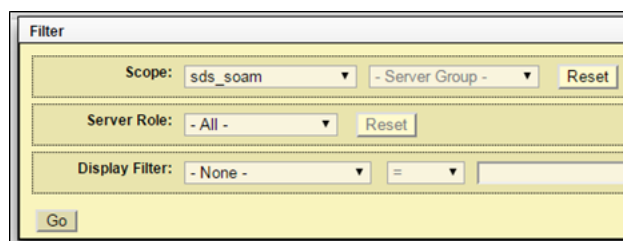Figure 9-10 Scope

4. Identify each server by Host name, Server Role, and OAM HA Role and record the name of each server.

Figure 9-11 Identify Servers

Hostname	OAM HA Role	Applicati on HA Role	Max Allowed HA Role	Mate Hostname List	Network Element	Server Role
dts3-so-a	Active	OOS	Active	dts3-so-b	sds_soam	System OAM
dts3-so-b	Standby	OOS	Active	dts3-so-a	sds_soam	System OAM
dts3-dp-1	Active	OOS	Active		sds_soam	MP

Record the names of the following SOAM NE site servers:

- Active SOAM Server
- Standby SOAM Server
- DP 1 Server
- DP 2 Server
- DP 3 Server
- DP 4 Server
- DP 5 Server
- DP 6 Server
- DP 7 Server
- DP 8 Server
- DP 9 Server
- DP 10 Server

5. Upgrade the Standby SOAM server (as identified and recorded in [step 4](#) of this procedure) using [#unique_62/unique_62_Connect_42_GUID-97AD59AA-540D-41D5-8D2B-F87B033E5B2C](#).

Note

If using the **Auto Upgrade** option, SOAM servers are upgraded serially (standby then active).

6. Upgrade the Standby SOAM server (as identified and recorded in [step 4](#) of this procedure) using [#unique_62/unique_62_Connect_42_GUID-97AD59AA-540D-41D5-8D2B-F87B033E5B2C](#).

Note

Half of the installed DP servers at a SOAM site may be upgraded in parallel using the **Upgrade Server** option for each individual DP server as described in [#unique_62/unique_62_Connect_42_GUID-97AD59AA-540D-41D5-8D2B-F87B033E5B2C](#).

7. In the Primary SDS NOAM VIP, upgrade up to half of the installed DP servers in parallel. Upgrade up to half (for example, 1 of 2, 2 of 4, etc.) of the DP server(s) (as identified and recorded in [step 4](#) of this procedure) in parallel using the Upgrade Server option for each DP server as described in [#unique_62/unique_62_Connect_42_GUID-97AD59AA-540D-41D5-8D2B-F87B033E5B2C](#).
8. Upgrade all remaining DP Servers in this SOAM NE site (as identified and recorded in [step 4](#) of this procedure) in parallel using the Upgrade Server option for each DP server as described in [#unique_62/unique_62_Connect_42_GUID-97AD59AA-540D-41D5-8D2B-F87B033E5B2C](#).

9.2.3 Perform Health Check (SOAM Post Upgrade)

This procedure is part of software upgrade preparation and is used to determine the health and status of the SDS network and servers. Run SDS Health Check procedures as specified in [#unique_22/unique_22_Connect_42_GUID-8C8E13D3-8EA1-4275-8DF2-94BF4D450E98](#)

9.3 Post Upgrade Procedures

This section contains procedures that are run after all servers have been upgraded.

To update the SOAM VM profile to support 1 billion subscribers, follow the procedures in **Add New SOAM Profile on Existing VM**.

9.3.1 Accept the Upgrade


The upgrade needs either to be accepted or rejected before any subsequent upgrades may be performed in the future. The **Event ID: 32532Server Upgrade Pending Accept/Reject** displays for each server until **Accept** or **Reject** is performed.

Note

An upgrade should be accepted only after all servers in the SDS topology have successfully completed upgrade to the target release. The user should also be aware that upgrade acceptance prevents any possibility of back out to the previous release.


1. Log in to the SDS NOAM GUI, use the VIP address to access the primary SDS NOAM GUI as described in [#unique_43/unique_43_Connect_42_GUID-FA5B2F0E-069F-4C52-99A4-1B05C9FAF6E9](#).
2. In the Primary SDS NOAM VIP, accept the upgrade. Expand **Administration** select **Software Management** click **Upgrade**.

Figure 9-12 Upgrade

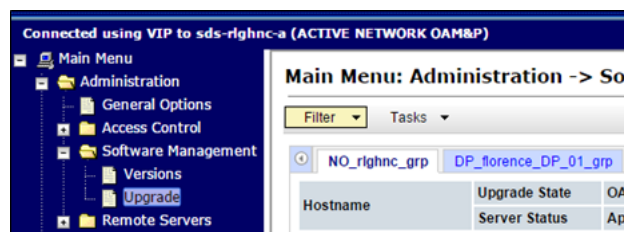


3. Select the Server Group tab containing the server(s) to **Accept** the upgrade.
4. Press and hold the **Ctrl** key to select multiple server(s) in the server group.
5. Click **Accept**.

Figure 9-13 Accept

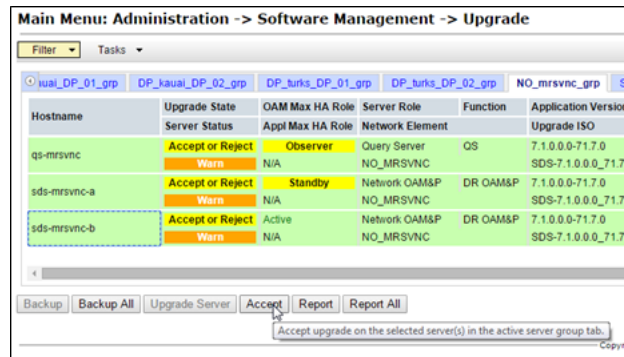


- In the Primary SDS NOAM VIP, monitor status. Click **OK** to confirm.

Figure 9-14 Monitor Status

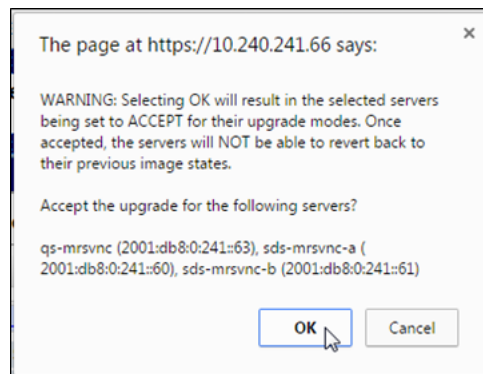


- The **Upgrade State** changes to **Accepting**.

Figure 9-15 Upgrade State

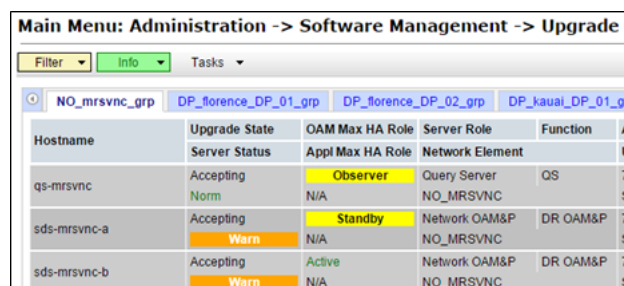

- The banner displays an **Upgrade has been accepted on** message for each server.

Figure 9-16 Accept Upgrade

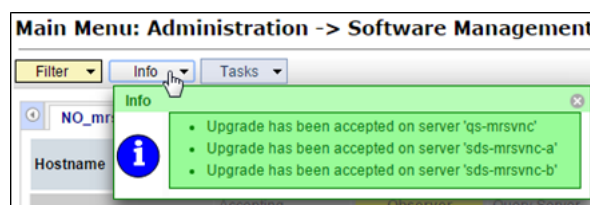

9. Primary SDS NOAM VIP, monitor status. The **Upgrade State** changes to **Backup Needed**.

Figure 9-17 Backup Needed

Main Menu: Administration -> Software Management -> Upgrade

Filter

Info

Tasks

NO_mrsvnc_grp

DP_florence_DP_01_grp

DP_florence_DP_02_grp

DP_kauai_DP_01_gp

Hostname	Upgrade State	OAM Max HA Role	Server Role	Function
	Server Status	Appl Max HA Role	Network Element	
qs-mrsvnc	Backup Needed Norm	Observer N/A	Query Server NO_MRSVNC	QS
sds-mrsvnc-a	Backup Needed Norm	Standby N/A	Network OAM&P NO_MRSVNC	DR OAM&P
sds-mrsvnc-b	Backup Needed Norm	Active N/A	Network OAM&P NO_MRSVNC	DR OAM&P

Note

The **Backup Needed Upgrade State** is expected to remain until the next software upgrade is performed. Do not re-run COMCOL backups except when directed to do so during the upgrade process.

Note

Accepting of upgrade may take several minutes. Do not try to accept again or an improper upgrade accepting states in the “Server Upgrade States” column on the Upgrade Administration screen.

10. In the Primary SDS NOAM VIP, repeat [steps 2](#) up to [9](#) of this procedure for each additional Server Group tab until the upgrade has been accepted on all servers in the SDS topology.
11. In the Primary SDS NOAM VIP, verify upgrade acceptance. Expand **Alarms & Events** click **View Active**.

Figure 9-18 View Active Alarms

Connected using VIP to sds-rlghnc-a (ACTIVE NETWORK OAM&P)

Main Menu: Alarms & Events -> View A

Filter	Tasks	Graph
NO_mrsvnc_grp	NO_rlghnc_grp	SO_florence_grp
Seq #	Event ID	Timestamp
	Alarm Text	

2. Verify the **Event ID: 32532 Server Upgrade Pending Accept/Reject** alarm no longer displays for any server in the SDS topology.

9.3.2 SOAM VM Profile Update

C-class deployments are required to update the SOAM VM profile after upgrading to SDS release 8.0 and later. The updated profile allocates additional resources required to support

expanded subscriber capacity. The profile update is to be applied only after the upgrade has been accepted ([#unique_48/unique_48_Connect_42_GUID-CE14B605-BC5C-46C0-8D7B-70CDD5EC2F06](#)).

- The SOAM VM profile update applies only to SDS 8.0 and later.
- The SOAM VM profile update can be applied only after the upgrade to SDS 8.0/8.1/8.2/8.3/8.4/8.5/8.6 has been accepted.
- The SOAM VM profile update does not apply to VE-DSR and cloud deployments.

Add New SOAM Profile on Existing VM is an independent procedure and may be run at any time after the upgrade has been accepted. It is recommended that the customer schedule a separate maintenance window for implementation of the new SOAM VM profile.

To update the SOAM VM profile to support 1 billion subscribers, run **Add New SOAM Profile on Existing VM** or skip this step.

10

Recovery Procedures

Upgrade procedure recovery issues should be directed to the Oracle's customer care. Before executing any of these procedures, refer to [#unique_15/unique_15_Connect_42_GUID-AAD93B71-B4B8-4F1C-83E5-16C9C91CC52E](#).

Recovery procedures are documented in the Disaster Recovery Guide. Run this section only if there is a problem and it is desired to revert back to the pre-upgrade version of the software.

Note

Back out procedures cause traffic loss.

Note

These recovery procedures are provided for the back out of an upgrade only (for example, for the back out from a failed target release to the previously installed release). Back out of an initial installation is not supported.

Note

If the customer deployment has both the FABR and PCA features enabled, then upgrade the DSR nodes first before upgrading the SDS nodes.

10.1 Backout Setup

Identify IP addresses of all servers that need to be backed out.

1. Expand **Administration** select **Software Management** click **Upgrade**.
2. Based on the **Application Version** column, identify all the host names that need to be backed out.
3. Expand **Configuration** click **Servers**.
4. Identify the IMI IP addresses of all the host names identified in [step 2](#). These are required to access the server when performing the back out.

The reason to run a back out has a direct impact on any additional back out preparation that must be done. The back out procedure causes traffic loss. All possible reasons cannot be predicted ahead of time.

Note

Verify the two backup archive files created in using [#unique_41/unique_41_Connect_42_GUID-3173AF2E-FE60-4A02-B6E0-8D14DEA6D17D](#) are present on every server that is to be backed-out.

These archive files are located in the /var/TKLC/db/filemgmt directory and have different file names from other database backup files.

The file names have the following format:

- Backup.<application>.<server>.FullDBParts.<role>.<date_time>.UPG.tar.bz2
- Backup.<application>.<server>.FullRunEnv.<role>.<date_time>.UPG.tar.bz2

10.2 Perform Backout

The following procedures to perform a back out can only be run once all necessary corrective setup steps have been taken to prepare for the back out. Contact [#unique_15/unique_15_Connect_42_GUID-AAD93B71-B4B8-4F1C-83E5-16C9C91CC52E](#) to identify if all corrective setup steps have been taken.

During the backout, the servers may have some or all of the following expected alarms until the server is completely backed out, but are not limited to Event IDs:


- Alarm ID = 31283 (Highly available server failed to receive mate heartbeats)
- Alarm ID = 31109 (Topology config error)
- Alarm ID = 31114 (DB Replication over SOAP has failed)
- Alarm ID = 31106 (DB Merge To Parent Failure)
- Alarm ID = 31134 (DB replication to slave failure)
- Alarm ID = 31102 (DB replication from master failure)
- Alarm ID = 31282 (HA management fault)
- Alarm ID = 10012 (Table change responder failed)
- Alarm ID = 31226 (HA Availability Status Degraded)

10.2.1 Back Out the SOAM

The following procedure details how to perform software back out for servers in the SOAM NE.


1. Access the primary SDS NOAM GUI, use the VIP address to access the primary SDS NOAM GUI as described in [#unique_43/unique_43_Connect_42_GUID-FA5B2F0E-069F-4C52-99A4-1B05C9FAF6E9](#).
2. In the Primary SDS NOAM VIP (GUI), record the name of the SOAM NE site. Expand **Status & Manage** click **HA**. Click **Filter**.

Figure 10-1 Filter

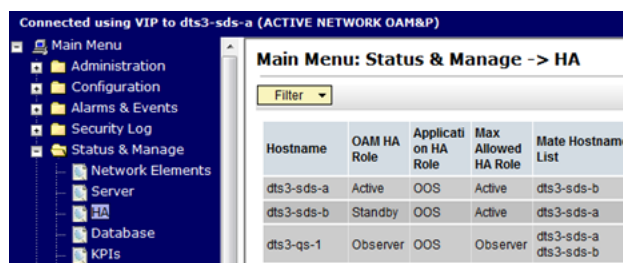

3. In the Primary SDS NOAM VIP, list servers. Using the information provided in [#unique_33/unique_33_Connect_42_GUID-CCE8D7F5-9E19-4F82-B343-622722BDD7C3](#) select the primary SDS SOAM Network Element from the **Scope** field. Click **Go**.

Figure 10-2 Scope

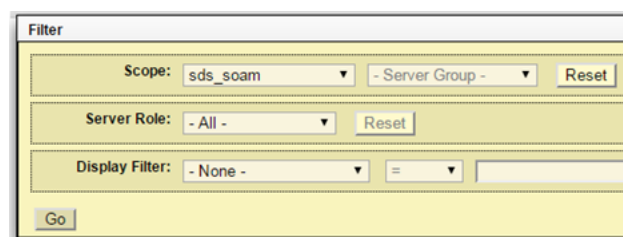

4. Identify each server by Host name, Server Role, and OAM HA Role and record the name of each server.

Figure 10-3 Identify Server

Hostname	OAM HA Role	Application HA Role	Max Allowed HA Role	Mate Hostname List	Network Element	Server Role
dts3-so-a	Active	OOS	Active	dts3-so-b	sds_soam	System OAM
dts3-so-b	Standby	OOS	Active	dts3-so-a	sds_soam	System OAM
dts3-dp-1	Active	OOS	Active		sds_soam	MP

Record the names of SOAM NE site servers:

- Active SOAM Server
- Standby SOAM Server
- DP 1 Server
- DP 2 Server
- DP 3 Server
- DP 4 Server
- DP 5 Server
- DP 6 Server
- DP 7 Server
- DP 8 Server

- DP 9 Server
 - DP 10 Server
5. In the Primary SDS NOAM VIP, downgrade DP 1 Server (as identified and recorded) in [step 4](#) of this procedure using [#unique_86/unique_86_Connect_42_GUID-9BA4B100-CDE3-46A0-BBD4-2BE11E089951](#).
 6. Downgrade all remaining DP servers in serial or parallel (as identified and recorded) in [step 4](#) of this procedure using [#unique_86/unique_86_Connect_42_GUID-9BA4B100-CDE3-46A0-BBD4-2BE11E089951](#). Repeat this step until all DP servers requiring the downgrade within this SOAM NE site have been backed out.
 7. Downgrade the Standby SOAM server (as identified and recorded) in [step 4](#) of this procedure using [#unique_86/unique_86_Connect_42_GUID-9BA4B100-CDE3-46A0-BBD4-2BE11E089951](#).

During the back out, the servers may have the following expected alarms:


- Alarm ID = 31114 (DB replication over SOAP has failed)
- Alarm ID = 31282 (HA management fault)

Note

Do not proceed with the next step until [steps 5](#) through [step 7](#) of this procedure have been successfully completed.

8. Downgrade the Active SOAM server, (as identified and recorded) in [step 4](#) of this procedure using [#unique_86/unique_86_Connect_42_GUID-9BA4B100-CDE3-46A0-BBD4-2BE11E089951](#).
9. Access the primary SDS NOAM GUI, use the VIP address to access the primary SDS NOAM GUI as described in [#unique_43/unique_43_Connect_42_GUID-FA5B2F0E-069F-4C52-99A4-1B05C9FAF6E9](#).
10. This is an optional step, in the SOAM VIP (GUI), enable site provisioning. Use this step, in case Site Provisioning is Disabled. Expand **Status & Manage** click **Database**

Figure 10-4 Database

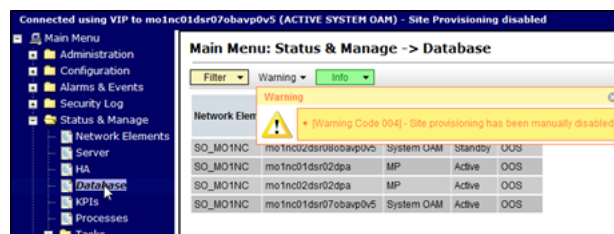

11. Click **Enable Site Provisioning**.

Figure 10-5 Enable Site Provisioning



12. Click **OK** to confirm.
13. Click **Logout** to log out of the SOAM GUI.

Figure 10-6 Log out




14. In the Primary SDS NOAM VIP, run downgrade for the remaining SOAM NE site(s). Repeat all above steps of this procedure for the remaining SOAM NE site(s) (as identified and recorded in section [#unique 33/unique 33 Connect 42 GUID-CCE8D7F5-9E19-4F82-B343-622722BDD7C3](#)) until all SOAM NE site(s) requiring the downgrade have been backed out.
15. Run [#unique 22/unique 22 Connect 42 GUID-8C8E13D3-8EA1-4275-8DF2-94BF4D450E98](#) at this time only if no other server requires the downgrade, else proceed with the next back out procedure.

10.2.2 Back Out the DR SDS NOAM

This procedure is used to back out the DR SDS NOAM.


1. Log in to the SDS NOAM GUI. Use the VIP address to access the primary SDS NOAM GUI as described in [#unique 43/unique 43 Connect 42 GUID-FA5B2F0E-069F-4C52-99A4-1B05C9FAF6E9](#).
2. In the Primary SDS NOAM VIP, record name of DR SDS NE site. Expand **Status & Manage** click **HA**. Click **Filter**.

Figure 10-7 Filter

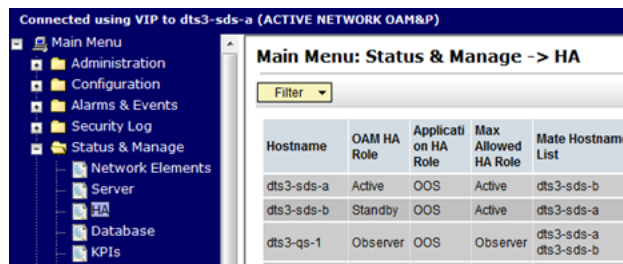

3. In the Primary SDS NOAM VIP, list servers. Using the information provided in section [#unique 33/unique 33 Connect 42 GUID-CCE8D7F5-9E19-4F82-B343-622722BDD7C3](#) select the DR SDS Network Element from the **Scope** field. Click **Go**.

Figure 10-8 Scope

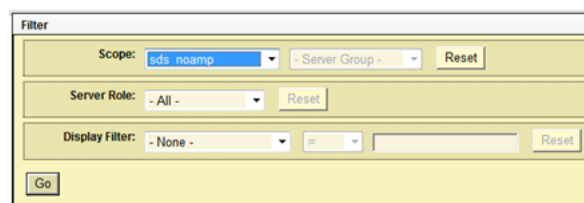

4. Identify each server by Host name, Server Role, and OAM HA Role and record the name of each server.

Figure 10-9 Server Information

Hostname	OAM HA Role	Application HA Role	Max Allowed HA Role	Mate Hostname List	Network Element	Server Role
dts3-sds-a	Active	OOS	Active	dts3-sds-b	sds_noamp	Network OAM&P
dts3-sds-b	Standby	OOS	Active	dts3-sds-a	sds_noamp	Network OAM&P
dts3-qs-1	Observer	OOS	Observer	dts3-sds-a dts3-sds-b	sds_noamp	Query Server

Record the names of primary DR SDS NE site servers:

- Active DR SDS NOAM
 - Standby DR SDS NOAM
 - DR SDS Query Server (if equipped)
5. Downgrade the Standby DR SDS NOAM server (as identified and recorded in [step 4](#) of this procedure) using [#unique_86/unique_86_Connect_42_GUID-9BA4B100-CDE3-46A0-BBD4-2BE11E089951](#).

Note

Do not proceed to the next step until this step of the procedure is successfully completed.

Note

The next two steps of this procedure may run parallel using the **Upgrade Server** option.

6. Downgrade the DR SDS Query server (as identified and recorded in [step 4](#) of this procedure) using [#unique_86/unique_86_Connect_42_GUID-9BA4B100-CDE3-46A0-BBD4-2BE11E089951](#).
7. Downgrade the ActiveDR SDS server (as identified and recorded in [step 4](#) of this procedure) using [#unique_86/unique_86_Connect_42_GUID-9BA4B100-CDE3-46A0-BBD4-2BE11E089951](#).
8. Run [#unique_22/unique_22_Connect_42_GUID-8C8E13D3-8EA1-4275-8DF2-94BF4D450E98](#) at this time only if no other servers require the downgrade. Proceed with the next back out procedure.


10.2.3 Back Out the Primary SDS NOAM

The following procedure details how to perform software back out for servers in the primary SDS NOAM NE.


Note

The order of the back out for the primary NOAM NE and DR NOAM NE needs to be followed as shown in [Table 3-10](#). See section [#unique_30/unique_30_Connect_42_GUID-54B28B88-0F59-4E23-BEDC-BF493C2C102A](#) for more details before proceeding.

1. Access the primary SDS NOAM GUI, use the VIP address to access the primary SDS NOAM GUI as described in [#unique_43/unique_43_Connect_42_GUID-FA5B2F0E-069F-4C52-99A4-1B05C9FAF6E9](#).
2. In the Primary SDS NOAM VIP, expand **Status & Manage** click **HA**. Click **Filter**.

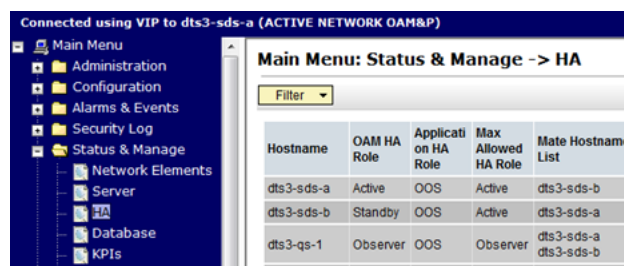Figure 10-10 Filter

3. In the Primary SDS NOAM VIP, locate the primary SDS NOAM NE. Using the information provided in section [#unique_33/unique_33_Connect_42_GUID-CCE8D7F5-9E19-4F82-B343-622722BDD7C3](#), select the primary SDS Network Element from the **Scope** field. Click **Go**.

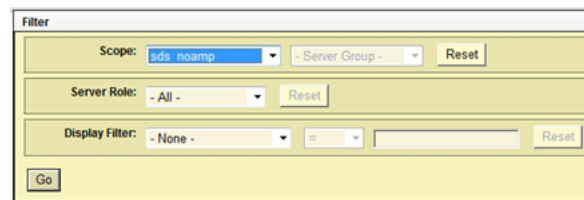Figure 10-11 Scope

4. Identify each server by Host name, Server Role, and OAM HA Role and record the name of each server.

Figure 10-12 Identify Servers

Main Menu: Status & Manage -> HA (Filtered)						
Filter						
Hostname	OAM HA Role	Application HA Role	Max Allowed HA Role	Mate Hostname List	Network Element	S
sds-righnc-a	Active	OOS	Active	sds-righnc-b	NO_RLGHNC	N
sds-righnc-b	Standby	OOS	Active	sds-righnc-a	NO_RLGHNC	N
qs-righnc	Observer	OOS	Observer	sds-righnc-a sds-righnc-b	NO_RLGHNC	O

Record the following information:

- Active Primary SDS NOAM
 - Standby Primary SDS NOAM
 - Primary SDS Query Server (if equipped)
5. Downgrade Standby Primary SDS NOAM server (as identified and recorded in [step 4](#) of this procedure) using [#unique_86/unique_86_Connect_42_GUID-9BA4B100-CDE3-46A0-BBD4-2BE11E089951](#).
 6. In the Primary SDS NOAM VIP (CLI), access the active primary SDS NOAM. Use the VIP address to log into the active primary SDS NOAM with the admusr account.

```
sds-rlghnc-a login: admusr
Password: <admusr_password>
*** TRUNCATED OUTPUT ***
RELEASE=6.4
RUNID=00
VPATH=/var/TKLC/rundb:/usr/TKLC/appworks:/usr/TKLC/awpcommon:/usr/TKLC/
comagent-gui:/usr/TKLC/comagent-gui:/usr/TKLC/comagent:/usr/TKLC/sds
PRODPATH=/opt/comcol/prod
RUNID=00
[admusr@sds-rlghnc-a ~]$
```

7. In the Primary SDS NOAM VIP, verify the **DbReplication** status is **Active** for the **Standby Primary SDS NOAM** and **Query Server**, if equipped.

```
[admusr@sds-rlghnc-a ~]$ sudo irepstat -w
-- Policy 0 ActStb [DbReplication]
AA To sds-rlghnc-b Active 0 0.25 1%R 0.05%cpu 47B/s
AA To qs-rlghnc Active 0 0.25 1%R 0.05%cpu 56B/s
AA To sds-mrsvnc-a Active 0 0.50 1%R 0.04%cpu 47B/s
AB To kauai-sds-S0-b Active 0 0.50 1%R 0.04%cpu 63B/s
AB To florence-sds-S0-a Active 0 0.51 1%R 0.03%cpu 65B/s
AB To turks-sds-S0-b Active 0 0.50 1%R 0.04%cpu 65B/s
irepstat ( 8 lines) (h)elp
```

8. If a **DbReplication** status is **Audit** is received, then repeat the command until **Active** is returned.

Note

Do not proceed until the status is **Active**. Check Replication is showing **Active** for Standby Primary SDS NOAM, Query Server, Active DR SDS NOAM and Standby DR SDS NOAM (if equipped).

9. Repeat the step until the status is **Active** for all the mentioned servers.

Note

If a DbReplication status is received as **Audit** or some other value for these servers, repeat this step until a status of **Active** is returned. Servers are:

- Standby Primary SDS NOAM

- Query Server
- Active DR SDS NOAM
- Standby DR SDS NOAM

Contact [#unique_15/unique_15_Connect_42_GUID-AAD93B71-B4B8-4F1C-83E5-16C9C91CC52E](#) for any assistance.

10. Exit the CLI for the ActivePrimary SDS NOAM.

```
[admusr@sds-rlghnc-a filemgmt]$ exit  
logout
```

Note

The next two steps of this procedure can be run in parallel.

11. Downgrade Primary Query server (as identified and recorded in [step 4](#) of this procedure) using [#unique_86/unique_86_Connect_42_GUID-9BA4B100-CDE3-46A0-BBD4-2BE11E089951](#).
12. Downgrade Active Primary SDS NOAM server (as identified and recorded in [step 4](#) of this procedure) using [#unique_86/unique_86_Connect_42_GUID-9BA4B100-CDE3-46A0-BBD4-2BE11E089951](#).

Note

This causes an HA activity fail over to the mate primary SDS NOAM server. This occurs within a few minutes of initiating the upgrade.

13. Allow system to auto-clear temporary alarm states. Wait up to ten minutes for Alarms associated with server back out to auto clear.

Note

If PDB Relay was recorded as Enabled in [#unique_86/unique_86_Connect_42_GUID-9BA4B100-CDE3-46A0-BBD4-2BE11E089951](#), then Event 14189 (pdbRelay Time Lag) may persist for several hours post upgrade. This alarm can safely be ignored and automatically clears when the PDBI (HLRR) queue catches up with real-time replication.

14. Run Health Check procedures (Post back out) as specified in [#unique_22/unique_22_Connect_42_GUID-8C8E13D3-8EA1-4275-8DF2-94BF4D450E98](#), if downgrade procedures have been completed for all required servers.


A

Access the OAM GUI Using the VIP (NOAM/SOAM)

This procedure describes how to access and log in to the NOAM/SOAM GUI.

1. In the OAM VIP (GUI), log in to the OAM site.
 - a. Open an approved web browser (Internet Explorer 8.0, 9.0, or 10.0).
 - b. Connect to the XMI virtual IP address (VIP) assigned to the OAM site (primary SDS site or SOAM site).
 - c. If a certificate error is received, click **Continue to this website (not recommended)**.

Figure A-1 Website Security

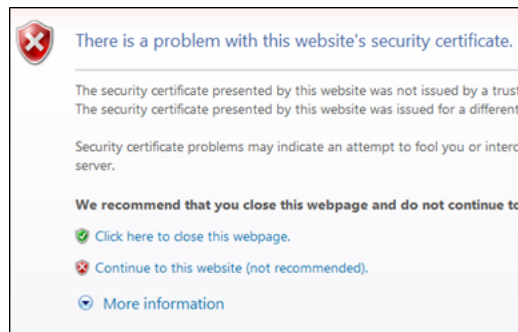

Note

Not applicable for cloud deployments.


2. In the OAM VIP (GUI), log in using the default user and password.

Figure A-2 Oracle System Log in



3. Verify the connection to the active OAM server and also verify that the browser is using the VIP connected to the active OAM server.

Figure A-3 OAM Server

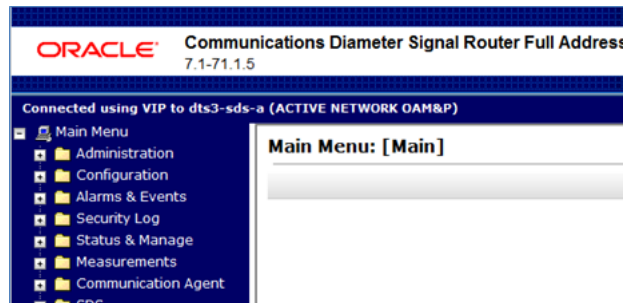

The source release is 8.x, the Release Banner displays the browser is successfully connected using the Active Network OAM&P. .

Figure A-4 Release Banner



Note

The message may show the connection to either a **NETWORK OAM&P** or a **SYSTEM OAM** depending on the selected Network Element.

A.1 Health Check Procedures

This procedure is part of software upgrade preparation and is used to determine the health and status of the SDS network and servers.

Note


If syscheck fails on any server during pre-upgrade Checks or in early checks stating that "cpu: FAILURE:: No record in alarm table for FAILURE", see [#unique_52/unique_52_Connect_42_GUID-96FCA4B6-F934-4D9B-9044-6A90517F3642](#).

If the **31201 - Process Not Running** alarm displays, for instance, as cmsoapa, then run [#unique_89/unique_89_Connect_42_GUID-CB95D852-DF57-438D-A01C-5C84844F1AB2](#).

1. In the SDS NOAM GUI, log in use the VIP address to access the primary SDS NOAM GUI as described in [#unique_43/unique_43_Connect_42_GUID-FA5B2F0E-069F-4C52-99A4-1B05C9FAF6E9](#).

2. In the Primary SDS NOAM VIP, verify status. Expand **Status & Manage** click **Server**.

Figure A-5 Server

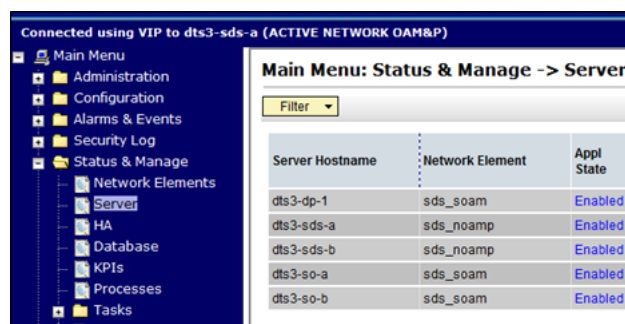

3. Verify Server Status is Normal (Norm) for Alarm (Alm), Database (DB), Reporting Status, and Processes (Proc).

Figure A-6 Server Status

Server Hostname	Network Element	Appl State	Alm	DB	Reporti ng Status	Proc
dts3-dp-1	sds_soam	Enabled	Norm	Norm	Norm	Norm
dts3-sds-a	sds_noamp	Enabled	Err	Norm	Norm	Norm
dts3-sds-b	sds_noamp	Enabled	Norm	Norm	Norm	Norm
dts3-so-a	sds_soam	Enabled	Norm	Norm	Norm	Norm
dts3-so-b	sds_soam	Enabled	Norm	Norm	Norm	Norm

If any other server status displays, it appears in a colored box.

Note

Other server states include Err, Warn, Man, and Unk.

Note

Post-Upgrade, upgraded servers have an **Alm** status of **Err** due to the **Event ID (s): 32532 Server Upgrade Pending Accept/Reject** expected alarm. This alarm displays until the upgrade is accepted and may be ignored at this time.


Note

During any time of upgrade in case 31149- DB Late Write Nonactive alarm is seen, please ignore it. This alarm does not have any effect on any functionality.

If 31201 - Process Not Running alarm is getting raised for Instance as cmsoapa then run [#unique_89/unique_89_Connect_42_GUID-CB95D852-DF57-438D-A01C-5C84844F1AB2](#) to solve this issue.

4. In the Primary SDS NOAM VIP, verify connection counts. Expand **Communication Agent** select **Maintenance** click **Connection**.

Figure A-7 Connection

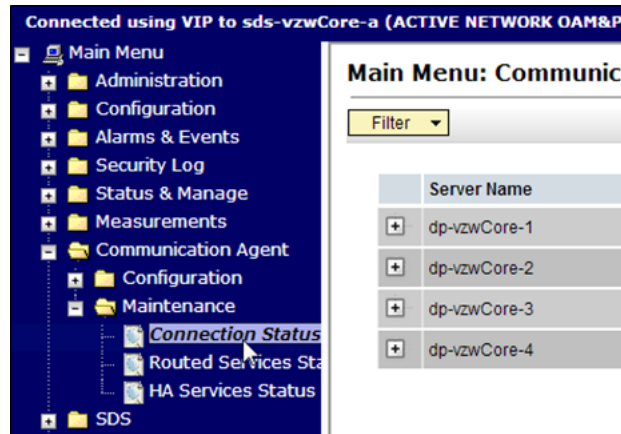

5. Verify all **Connection Counts** show equivalent counts (that is, n of n InService for Automatic or y of y InService for Configured)

Figure A-8 Maintenance


Main Menu: Communication Agent -> Maintenance			
Filter ▼			
	Server Name	Automatic Connections Count	Configured Connections Count
+	dp-vzwCore-1	3 of 3 InService	7 of 7 InService
+	dp-vzwCore-2	3 of 3 InService	7 of 7 InService
+	dp-vzwCore-3	3 of 3 InService	7 of 7 InService
+	dp-vzwCore-4	3 of 3 InService	7 of 7 InService

Note

DPs show a **Configured Connections Count** of 1 of 2 InService for Active/Standby configurations. This is normal and can be ignored.

6. In the Primary SDS NOAM VIP, view alarm status. Expand **Alarms & Events** click **View Active**.

Figure A-9 View Active

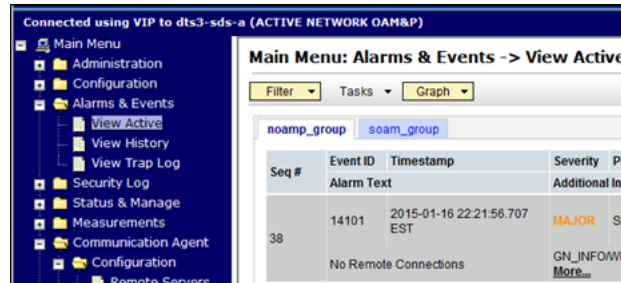

7. When viewing pre-upgrade status, if any alarms are present, stop and contact [#unique_15/unique_15_Connect_42_GUID-AAD93B71-B4B8-4F1C-83E5-16C9C91CC52E](#) for assistance before attempting to continue.

8. When viewing post-upgrade status, verify the following:

Active NO server may have the following expected alarms:

- Alarm ID = 10075 (Application processes have been manually stopped)

Servers that still have replication disabled have the following expected alarm:

- Alarm ID = 31113 (Replication Manually Disabled)

The following alarms may also be seen:

- Alarm ID = 10010 (Stateful database not yet synchronized with mate database)
- Alarm ID = 32532 (Server Upgrade Pending Accept/Reject)
- Alarm ID = 31114 (DB Replication over SOAP has failed)
- Alarm ID = 31225 (HA Service Start Failure)

Following alarms can be ignored during the upgrade:


- Alarm ID = 31109 (Topology Config Error)
- Alarm ID = 31282 (HA Management Fault)
- Alarm ID = 31283 (Lost Communication with server)
- Alarm ID = 31106 (DB Merge To Parent Failure)
- Alarm ID = 31107 (DB Merge From Child Failure)
- Alarm ID = 10009 (Config and Prov DB not yet synchronized)

Note

If Alarm 10009 persists after the upgrade, reboot the server once using the `sudo init 6` command on the effected server.

These alarms may display until all the NOAM and DR-NOAM servers upgrade has been completed.

9. In the Primary SDS NOAM VIP, create Alarms and Events report. Click **Export**.

Figure A-10 Export

10. Click **OK**.

Figure A-11 OK

Main Menu: Alarms & Events -> View Active [Export]

Attribute	Value	Description
Export Frequency	☒ Once ☐ Fifteen Minutes ☐ Hourly ☐ Daily ☐ Weekly	Select how often the data will be written immediately. Note that the Fifteen Minutes option is only available when provisioning is enabled. [Default: Once]
Task Name	APDE Alarm Export	Periodic export task name. [Required alphanumeric, minus sign, and space character must not be a minus sign.]
Description		Periodic export task description. [Optional alphanumeric, minus sign, and space character must not be a minus sign.]
Minute	0	Select the minute of each hour when hourly or fifteen minutes. [Default = 0]
Time of Day	12:00 AM	Select the time of day when the data is written weekly. Select from 15-minute increments. [Default: 12:00 AM]
Day of Week	☒ Sunday ☐ Monday ☐ Tuesday ☐ Wednesday ☐ Thursday ☐ Friday ☐ Saturday	Select the day of week when the data is written weekly. [Default: Sunday]

Ok Cancel

11. The name of the exported alarms CSV file displays in the Tasks tab.

Figure A-12 Tasks

Main Menu: Alarms & Events -> View Active

Filter Tasks Graph

Seq #	ID	Hostname	Name	Task State	Details	Progress
	2427	sds-rlghnc-a	APDE Alarm Export	completed	Alarms_20150724-133705-UTC_2427.csv.gz	100%

12. Primary SDS NOAM VIP, record the file names of alarm CSV files. The files have the format `Alarms<yyyymmdd>_<hhmmss>.csv`.

Record the following files:

- Pre-ISO Administration
- Post-ISO Administration
- Pre-Primary NOAM Upgrade (MW1)
- Post-DR NOAM Upgrade (MW1)
- Pre-SOAM Upgrade (MW2)
- Post-SOAM Upgrade (MW2)


- Pre-SOAM Upgrade (MW3)
- Post-SOAM Upgrade (MW3)
- Pre-SOAM Upgrade (MW4)
- Post-SOAM Upgrade (MW4)
- Pre-SOAM Upgrade (MW5)
- Post-SOAM Upgrade (MW5)

13. In the Primary SDS NOAM VIP, save the Alarms and Events report. Click **Report**

Figure A-13 Report




Figure A-14 View Active Alarms

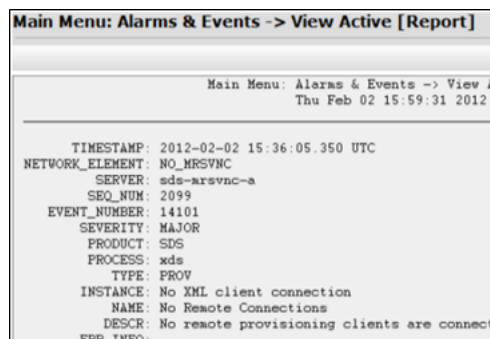


14. Click **Save** on the **Alarms and Events** report and click **Save** on the File Download screen.

Figure A-15 Save

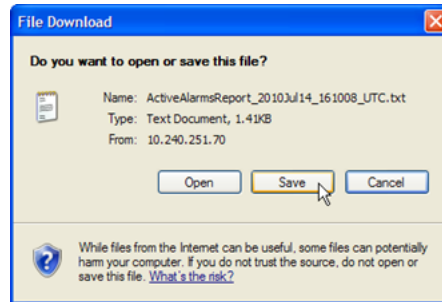


Figure A-16 Save


15. Select a directory on a local disk drive to store the active **Alarms and Events** report and click **Save**.

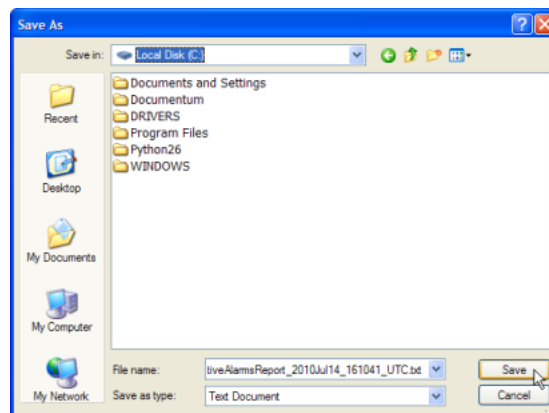Figure A-17 Save As

16. In the Primary SDS NOAM VIP, create **Network Element** report. Before 8.x, expand **Configuration** click **Network Elements**.

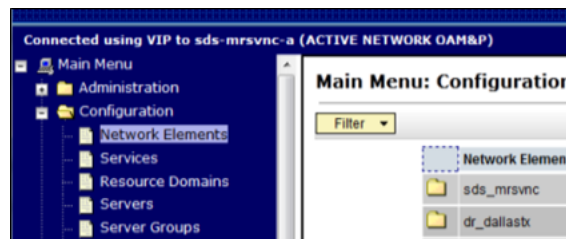
Figure A-18 Network Elements

17. Expand **Configuration**, select **Networking** and click **Networks**.

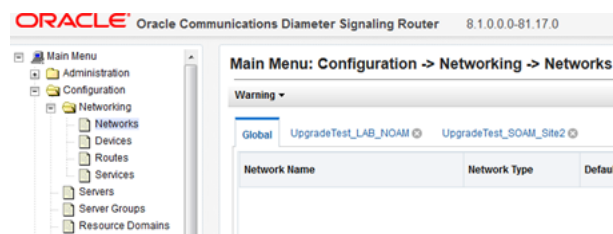Figure A-19 Networks


18. Click **Report**.

Figure A-20 Report

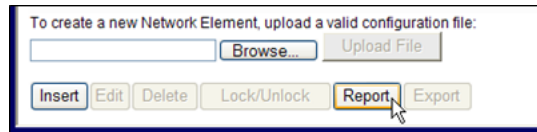

19. The **Network Element Report** is generated.

Figure A-21 Network Element Report

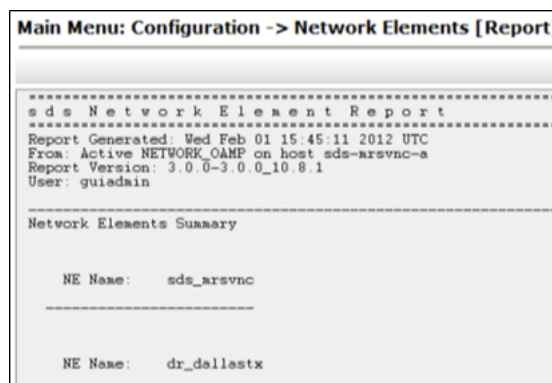

20. In the Primary SDS NOAM VIP, save the **Network Element** report. Click **Save** on the **Network Element** report and click **Save** on the File Download screen.

Figure A-22 Save






Figure A-23 Save File

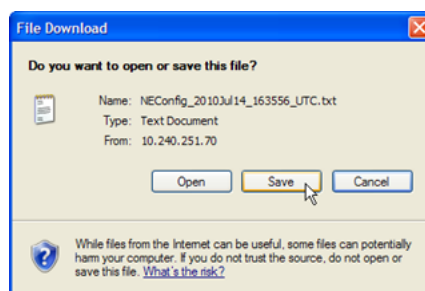


21. Select a directory on a local disk drive to store the **Network Element** report and click **Save**.

Figure A-24 Save As

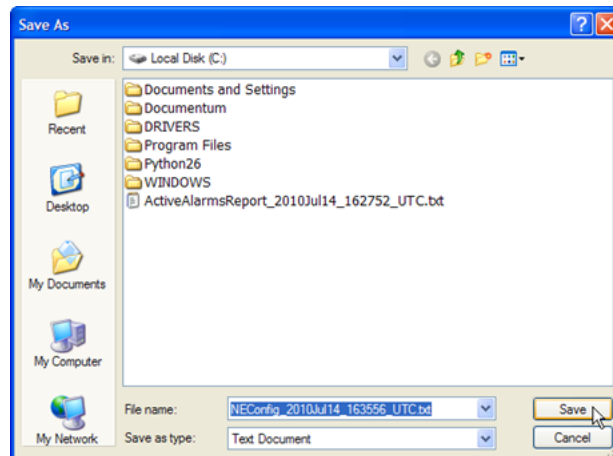

22. In the Primary SDS NOAM VIP, create the **Servers** report. Expand **Configuration** click **Servers**.

Figure A-25 Servers

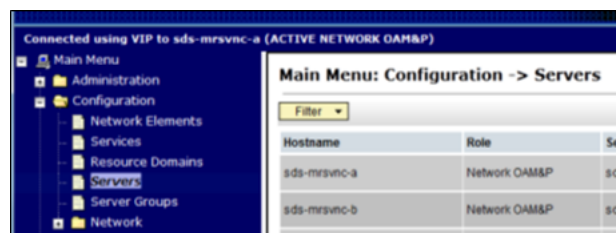


23. Click **Report**.

Figure A-26 Report



Figure A-27 Server Report

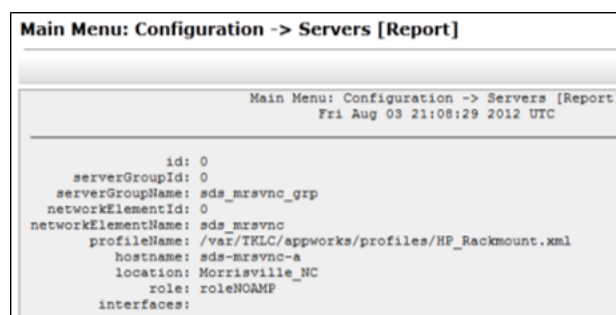

24. In the Primary SDS NOAM VIP, save the Servers report. Click **Save** on the **Servers** report and click **Save** on the File Download screen.

Figure A-28 Save






Figure A-29 Save File

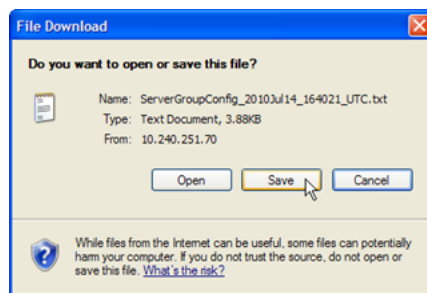


25. Select a directory on a local disk drive to store the **Servers** report and click **Save**.

Figure A-30 Save Server Report

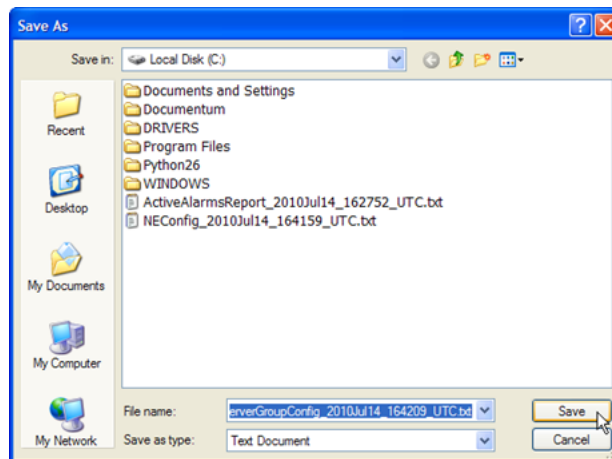

26. In the Primary SDS NOAM VIP, create **Server Groups** the report. Expand **Configuration** click **Server Groups**.

Figure A-31 Server Groups

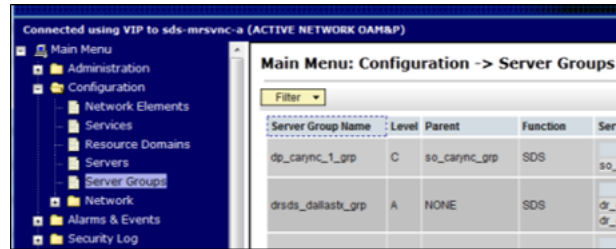

27. Click **Report**.

Figure A-32 Report





Figure A-33 Sever Groups Report

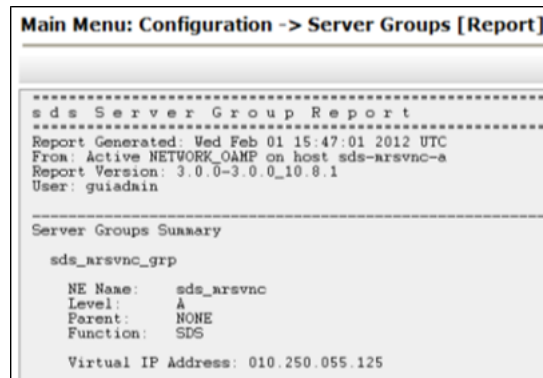

28. In the Primary SDS NOAM VIP, save the Servers report. Click **Save** on the **Server Groups** report and click **Save** on the File Download screen.

Figure A-34 Save


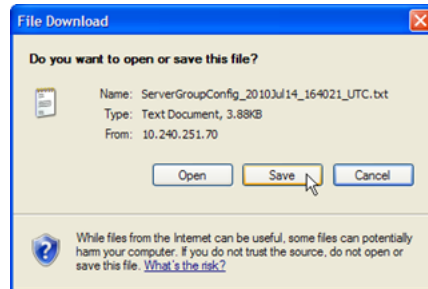
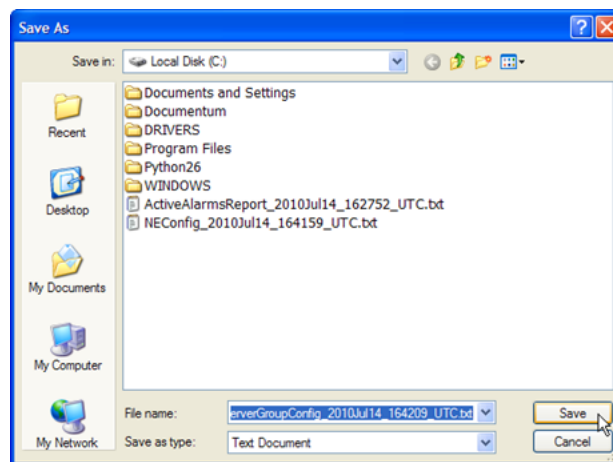


Figure A-35 Save File

29. Select a directory on a local disk drive to store the **Server Groups** report and click **Save**.

Figure A-36 Save Server Report

30. Share the saved files with [#unique_15/unique_15_Connect_42_GUID-AAD93B71-B4B8-4F1C-83E5-16C9C91CC52E](#). If these procedures are run as pre- or post-upgrade health check (HC1/HC2/HC3), sharing the files with [#unique_15/unique_15_Connect_42_GUID-AAD93B71-B4B8-4F1C-83E5-16C9C91CC52E](#) to obtain a proper health check analysis.

A health check analysis includes verifying the following information collected from [#unique_43/unique_43_Connect_42_GUID-FA5B2F0E-069F-4C52-99A4-1B05C9FAF6E9](#) procedure.

- Active **Alarms and Events** report.
- **Network Elements** report.
- **Server** report.
- **Server Group** report.

31. Verify OAM HA Role status, expand **Status & Manage** click **HA**

Figure A-37 HA

Connected using VIP to sds-rlghnc-a (ACTIVE NETWORK OAM&P)

Main Menu: Status & Manage -> HA

Filter

Hostname	OAM HA Role	Application HA Role
sds-rlghnc-a	Active	OOS
sds-rlghnc-b	Standby	OOS
qs-rlghnc	Observer	OOS
sds-mrsvnc-a	Standby	OOS
sds-mrsvnc-b	Active	OOS

32. Verify the **OAM HA Role** for all servers shows either **Active** or **Standby**.

Figure A-38 OAM HA Role

Main Menu: Status & Manage -> HA

Filter

Hostname	OAM HA Role	Application HA Role	Max Allowed HA Role	Mate Hostname List	Network Element	Server Role
sds-rlghnc-a	Active	OOS	Active	sds-rlghnc-b	NO_RLGHNC	Network OAM&P
sds-rlghnc-b	Standby	OOS	Active	sds-rlghnc-a	NO_RLGHNC	Network OAM&P
qs-rlghnc	Observer	OOS	Observer	sds-rlghnc-a sds-rlghnc-b	NO_RLGHNC	Query Server
sds-mrsvnc-a	Standby	OOS	Active	sds-mrsvnc-b	NO_MRSVNC	Network OAM&P
sds-mrsvnc-b	Active	OOS	Active	sds-mrsvnc-a	NO_MRSVNC	Network OAM&P
qs-mrsvnc	Observer	OOS	Observer	sds-mrsvnc-a sds-mrsvnc-b	NO_MRSVNC	Query Server
turks-sds-SO-a	Standby	OOS	Active	turks-sds-SO-b	SO_TURKS	System OAM
turks-sds-SO-b	Active	OOS	Active	turks-sds-SO-a	SO_TURKS	System OAM
turks-DP-01	Active	OOS	Active		SO_TURKS	MP
turks-DP-02	Active	OOS	Active		SO_TURKS	MP
kauai-sds-SO-a	Standby	OOS	Active	kauai-sds-SO-b	SO_KAUAI	System OAM

Note

An **OAM HA Role** shown as **Observer** is allowed when the server role is **Query Server**.

33. Verify the **OAM HA Role** for all remaining servers, expand **Main Menu** select **Status & Manage** click **HA**. Scroll through each page until the **OAM HA Role** for has been verified for all servers in the topology.

A.2 Upgrade Server Administration on SDS 9.0


Note

Run this procedure only if **Upgrade State** is **Accept** or **Reject**, unless parallel upgrades are being run.

If an upgrade failure is experienced (that is, Upgrade State is Failed), refer to [#unique_75/unique_75_Connect_42_GUID-487E319D-1191-442F-B566-E1C9643DFEFD](#).

1. Access the primary SDS NOAM GUI, use the VIP address to access the primary SDS NOAM GUI as described in [#unique_43/unique_43_Connect_42_GUID-FA5B2F0E-069F-4C52-99A4-1B05C9FAF6E9](#).
2. In the Primary SDS NOAM VIP, verify status and application version. Expand **Administration** select **Software Management** click **Upgrade**. Select the Server Group tab for the server(s) to be upgraded.

Figure A-39 Upgrade

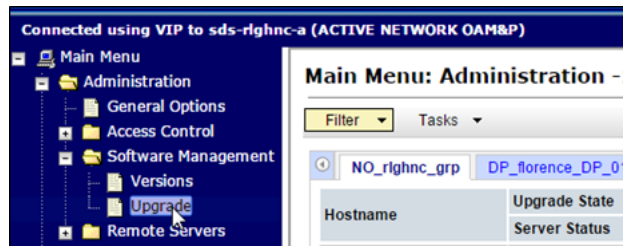

3. Verify the **Upgrade Status** displays as **Ready** for the server(s) to be upgraded. Verify the **Application Version** for the server(s) is the source software release version.


Figure A-40 Application Version

Main Menu: Administration -> Software Management -> Upgrade

Hostname	Upgrade State	OAM Max HA Role	Server Role	Function	Application Version
Server Status	Appl Max HA Role	Network Element	Upgrade ISO		
sds-righnc-a	Ready Norm	Active N/A	Network OAM&P NO_RLGHNC	OAM&P	7.1.0.0-71.6.0
sds-righnc-b	Ready Norm	Standby N/A	Network OAM&P NO_RLGHNC	OAM&P	7.1.0.0-71.6.0
qs-righnc	Ready Norm	Observer N/A	Query Server NO_RLGHNC	QS	7.1.0.0-71.6.0

4. If executing Server Group Auto Upgrade, then run [step 7](#) of this procedure. It is allowed for DR NOAM, SOAM, and DP server groups only. If executing Single Server (or multi-selected) upgrade, then continue with the next step of this procedure. This applicable only for primary NOAM and DP server groups.
5. Run this step for single server (or multi-selected) upgrade only. In the Primary SDS NOAM VIP, upgrade server(s). Press and hold the **Ctrl** key to select multiple servers that need to be upgraded. Click **Upgrade Server**.

Figure A-41 Upgrade Server

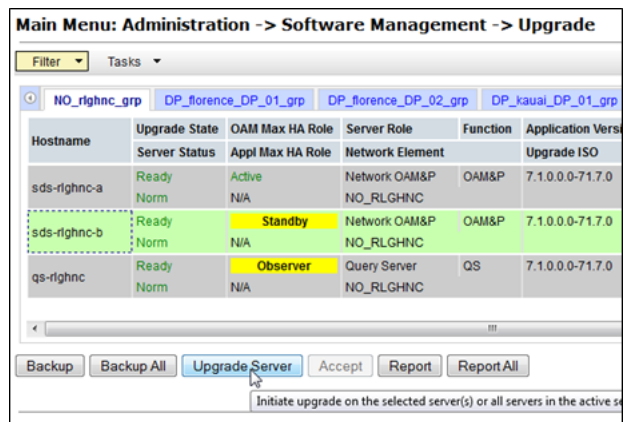

6. Select the Upgrade ISO file to use for the upgrade. Click **OK**.

Figure A-42 OK

Main Menu: Administration -> Softw. Management -> Upgrade [I]

Info ▾

Hostname	Action	Status	OAM Max HA Role	Network Element
sds-rlghnc-b	Upgrade	Standby	Standby	NO_RLGHNC

Upgrade Settings

Upgrade ISO: SDS-7.1.0.0.0_71.8.0-x86_64.iso Select the desired upgrade ISO media file.

Ok Cancel

Note

During the server upgrade, multiple alarms are expected and can be safely ignored. These include but are not limited to Event IDs: 10009, 10073, 10075, 31101, 31102, 31106, 31107, 31109, 31114, 31225, 31282 and 31283. These alarms may display until all the NOAM and DR-NOAM servers upgrade has been completed.

Note

If Alarm 10009 persists after the upgrade, reboot the server once using the `sudo init 6` command on the effected server.

7. Run this step for Server Group **Auto Upgrade** only. Do not use the Auto Upgrade option when upgrading the primary SDS NOAM server group. In the Primary SDS NOAM VIP, upgrade servers. Click **Auto Upgrade**. Do not select any servers with this option.

Figure A-43 Auto Upgrade

Main Menu: Administration -> Software Management -> Upgrade

Filter ▾ Tasks ▾

uai_DP_01_grp DP_kauai_DP_02_grp DP_turks_DP_01_grp DP_turks_DP_02_grp NO_mrs

Hostname	Upgrade State	OAM Max HA Role	Server Role	Function	Application Version
qs-mrsync	Ready	Observer	Query Server	QS	7.1.0.0-71.7.0
sds-mrsync-a	Ready	Standby	Network OAM&P	DR OAM&P	7.1.0.0-71.7.0
sds-mrsync-b	Ready	Active	Network OAM&P	DR OAM&P	7.1.0.0-71.7.0

Back Backup All Auto Upgrade Accept Report Report All

8. Select the **Bulk** option. Select the **Upgrade ISO** file to use for the upgrade. Click **OK**.

Figure A-44 Upgrade ISO

Main Menu: Administration -> Software Management -> Upgrade

Info

Hostname	Action	Status
qs-mrsvnc	Upgrade	OAM Max HA Role: Observer Network Element: NO_MRSVNC
sds-mrsvnc-a	Upgrade	OAM Max HA Role: Standby Network Element: NO_MRSVNC
sds-mrsvnc-b	Auto upgrade	OAM Max HA Role: Active Network Element: NO_MRSVNC (This server will upgrade after all Standby servers are upgraded)

Upgrade Settings

Mode

☒ Bulk
☐ Serial
☐ Grouped Bulk

Upgrade ISO: SDS-7.1.0.0.0_71.8.0-x86_64.iso

Server group upgrade mode.
 Select "Bulk" to upgrade all non-active servers.
 Select "Serial" to upgrade servers one by one.
 Select "Grouped Bulk" to upgrade all servers in a group.
 In all modes, the active OAM server will be upgraded last.
 HA groups are created according to the OAM Max HA Role.
 The non-active HA role order is spare.

Ok Cancel

All non-active servers are upgraded first (for example, standby, query, so on).

Note

During the server upgrade, multiple alarms are expected and can be safely ignored. These include but are not limited to Event IDs: 10009, 10073, 10075, 31101, 31102, 31106, 31107, 31109, 31114, 31225, 31282 and 31283. These alarms may display until all the NOAM and DR-NOAM servers upgrade has been completed.

Note

If Alarm 10009 persists after the upgrade, reboot the server once using the `sudo init 6` command on the effected server.

9. If the upgrade procedure is being run for a previously active primary SDS NOAM server (that is 2nd NOAM to be upgraded), then continue with the next step of this procedure, else run step 9 of this procedure.
10. In the primary SDS NOAM VIP, if upgrading the active primary SDS NOAM server, an HA failover occurs the user's GUI session ends as the active primary SDS server goes through HA failover and becomes the Standby server.
11. Click **Logout** to log out from the SDS NOAM GUI.

Figure A-45 Log out




12. In the Primary SDS NOAM VIP (GUI), clear the cached data. JavaScript libraries, images, and other objects are often modified in the upgrade. Browsers can sometimes cause GUI problems by holding on to the old objects in the built-in cache. To prevent these problems, always clear the browser cache before logging into an OAM GUI that has just been upgraded:
 - a. Simultaneously press and hold the **Ctrl**, **Shift**, and **Delete** keys (most Web browsers).
 - b. Select the appropriate object types to delete from the cache (for example, **Temporary Internet Files**, **Cache**, or **Cached images and files** and so on). Other browsers may label these objects differently.
 - c. Clear the cached data.

Note

Do not proceed until the browser cache has been cleared.

13. Access the primary SDS NOAM GUI, use the VIP address to access the primary SDS NOAM GUI as described in [#unique_43/unique_43_Connect_42_GUID-FA5B2F0E-069F-4C52-99A4-1B05C9FAF6E9](#).
14. In the Primary SDS NOAM VIP, monitor status expand **Administration** select **Software Management** click **Upgrade**.

Figure A-46 Monitor Status

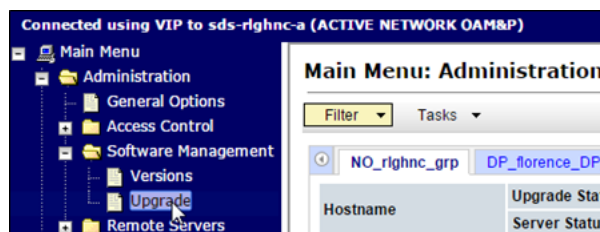

15. Monitor the **Upgrade State** and the **Status Message** for the servers being upgraded.

Figure A-47 Upgrade State

Main Menu: Administration -> Software Management -> Upgrade

Filter Status Tasks

Status ☒ One or more server upgrades started

Hostname	Server Status	Appl Max HA Role	Network Element	Function	Application Version	Start Time
sds-rh9nc-a	Ready Err	Active N/A	Network: OAM&P NO_RLGHNC	OAM&P	7.1.0.0-7.1.0.7	
sds-rh9nc-b	Upgrading Unk	OOS N/A	Network: OAM&P NO_RLGHNC	OAM&P	7.1.0.0-7.1.0.8 SDS-7.1.0.0.0_71.8.0-x86_64.iso	2015-08-06 12:22:37 UTC Upgrade is in progress
qs-rh9nc	Ready Err	N/A	Query Server NO_RLGHNC	QS	7.1.0.0-7.1.0.7	

As the upgrade runs, the following states can be observed:

Table A-1 Status Message

Sequence	Upgrade State	Status Message
1	Pending	Pending upgrade
2	Preparing	Upgrade task started
3	Validating	Validating upgrade ISO image
4	Upgrading	Upgrade is in progress
5	Rebooting	Warn: failed to get TPD task state, server could be rebooting
6	Not Ready	Success: Upgraded server to new ISO
7	Accept or Reject	Success: Server upgrade is complete

Note

Some states may transition faster than the screen refresh rate and appear to skip.

Note

In the unlikely event SDS fails to restart after the upgrade, the **Upgrade State** will be **Backout Ready** and the Status Message displays **Server could not restart the application to complete the upgrade**. Perform [#unique_90/unique_90_Connect_42_GUID-D1523700-670B-43CE-A490-BAECF66D8EFA](#) to restore the server to full operational status and return to this procedure to continue the upgrade.

16. Do not proceed to further steps unless the **Upgrade State** is **Accept** or **Reject** (except in cases where parallel upgrades are being performed).
17. In the primary SDS NOAM VIP, view post upgrade status of the server's. Post-upgrade, the upgraded servers have the **Event ID (s): 32532 (Server Upgrade Pending Accept/Reject)** expected alarm.
18. In the release Server CLI, update the tuned profile. After a successful upgrade has been verified, access the server on command line (using SSH or console) and update the tuned profile:

```
$ sudo /usr/TKLC/sds/bin/sdsSharedMemTuned.sh
```

Verify whether the tuned profile has been successfully set to **comcol_app**:

```
$ sudo tuned-adm active
```

Sample output:

```
[admusr@SOAM1 ~]$ sudo tuned-adm active
```

```
Current active profile: comcol_app
```

```
Service tuned: enabled, running
```

```
Service ktune: enabled, running
```

A.3 Back Out a Single Server

The following procedure performs backout on a single server. Backout can be performed on all upgrades except a major upgrade.

1. In the Primary SDS NOAM VIP, ensure the server to be downgraded is in the **Accept or Reject** state.
2. Expand **Administration** select **Software Management** click **Upgrade**.
3. Select the tab containing the server(s) to be backed out.
4. Verify the Upgrade State is **Accept or Reject**.
5. Set the Max Allowed HA Role to **Standby**.
6. Expand **Status & Manage** click **HA**.
7. Click **Edit**.
8. Select the server(s) to be backed out and select a Max Allowed HA Role value of **Standby** (unless it is a **Query server**, in which case the value should remain set to **Observer**).
9. Click **OK**.

Note

If downgrading the active primary SDS NOAM server, then continue with the next step of this procedure; otherwise, skip to [step 14](#) of this procedure.


10. If downgrading the active primary SDS NOAM server, a HA fail over occurs. The user's GUI session ends as the active primary SDS server goes through HA fail over and becomes the **Standby** server.

Note

If the server being backed out is the active NOAM and an HA fail over does not happen after [step 2](#), and the OAM HA Role of the NOAMP server to be backed out on the HA status screen is still **Active**, then you have encountered a known issue. Apply the workaround using Appendix L to have the NOAMP HA fail over.

11. Click **Logout** to log out of the SDS NOAM GUI.

Figure A-48 Log out



12. In the Primary SDS NOAM VIP, clear the cached data. JavaScript libraries, images, and other objects are often modified in the upgrade. Browsers can sometimes cause GUI problems by holding on to the old objects in the built-in cache. To prevent these problems, always clear the browser cache before logging into an OAM GUI that has just been upgraded:
 - a. Simultaneously press and hold the **Ctrl**, **Shift**, and **Delete** keys (most Web browsers).
 - b. Select the appropriate object types to delete from the cache (for example, **Temporary Internet Files**, **Cache**, or **Cached images and files**, and so on). Other browsers may label these objects differently.


- c. Clear the cached data.

Note

Do NOT proceed until the browser cache has been cleared.

13. Access the primary SDS NOAM GUI, use the VIP address to access the primary SDS NOAM GUI as described in [#unique_43/unique_43_Connect_42_GUID-FA5B2F0E-069F-4C52-99A4-1B05C9FAF6E9](#).
14. In the Primary SDS NOAM VIP, record PDB Relay Enabled state. Expand **SDS** select **Configuration** click **Options**.

Figure A-49 Options

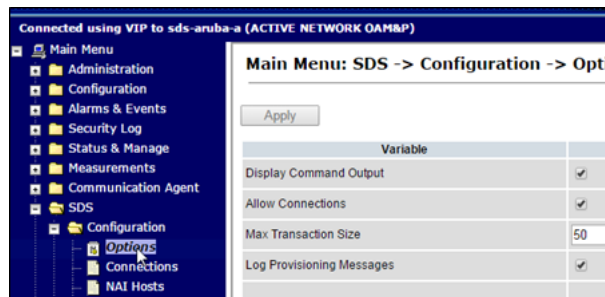

15. Locate the **PDB Relay Enable** check box and record if it is checked or not checked.

Figure A-50 PDB Relay Enable check box

Remote Audit Number Range Limit	1000 numbers
PDB Relay Enabled	☒
PDB Relay Primary Remote System VIP Address	10.240.40.6

Note

If the PDB Relay Enabled checkbox is CHECKED, then continue with the next step of this procedure. If the PDB Relay Enabled checkbox is NOT CHECKED, then skip to [step 19](#) of this procedure.

16. In the Primary SDS NOAM VIP (CLI), access the active primary SDS NOAM. Use the VIP address to log into the active primary SDS NOAM with the admusr account.

```
sds-rlghnc-a login: admusr
Password: <admusr_password>
*** TRUNCATED OUTPUT ***
RELEASE=6.4
RUNID=00
VPATH=/var/TKLC/rundb:/usr/TKLC/appworks:/usr/TKLC/awpcommon:/usr/TKLC/
```

```
comagent-gui:/usr/TKLC/comagent-gui:/usr/TKLC/comagent:/usr/TKLC/sds
PRODPATH=/opt/comcol/prod
RUNID=00
[admusr@sds-rlghnc-a ~]$
```

17. Set the pdbRelay TimeStamp to "0".

```
[admusr@sds-rlghnc-b ~]$ sudo iset -fvalue=0 ProvOptions where
"var='pdbRelayMsgLogTimeStamp'"
```

18. Exit the CLI for the active primary SDS NOAM.

```
[admusr@sds-rlghnc-b ~]$ exit
logout
```

19. In the Primary SDS NOAM VIP, stop the software. Expand **Status & Manage** click **Server**.
20. Select the server(s) to be backed out and click **Stop**.
21. Click **OK** to confirm.
22. Verify the Appl State updates to **Disabled**.
23. Verify the server(s) are back out ready. Expand **Administration** select **Software Management** click **Upgrade**. Select the tab for the server group containing the server(s) to be backed out.

Note

It may take a couple minutes for the grid to update.

24. Verify the Upgrade State displays as **Backout Ready**.

Note

If this is the active server in an Active-Standby pair, these steps cause an HA fail over. The HA fail over is an expected outcome. Continue with the steps on the new active NOAMP.

25. In the Server CLI, the SSH to the server(s) to be backed out. Use the SSH command (on UNIX systems — or putty if running on Windows) to log into the active NOAM.

```
ssh <NOAM XMI IP address>
login as: admusr
password: <enter password>
```

Note

If direct access to the XMI is not available, then access the target server using a connection through the active NO. SSH to the active NO XMI first. Once logged into the NO, SSH to the target server's XMI address.

26. Run the back out using the reject script.

```
$ sudo /var/TKLC/backout/diUpgrade --reject
***Executing.. /var/TKLC/backout/backout_server
--checkVerifying that backout is possible.Checking for stale RPM
DB locks...Current platform version:
7.0.2.0.0-86.30.0Continue backout?
[y/N]: y
```

The server reboots and the user is automatically logged out.

27. Use the SSH command (on UNIX systems — or putty if running on Windows) to log into the active NOAM.

```
ssh <NOAM XMI IP address>
login as: admusr
password: <enter password>
```

28. Verify the Back out, examine the upgrade logs in the /var/TKLC/log/upgrade directory and verify no errors are reported.

```
$ grep ERROR /var/TKLC/log/upgrade/upgrade.log
```

Note

The following errors can be ignored:

- DEBUG: 'iqt' command failed (is IDB running?)
- 1477080063::ERROR: TKLCsds-7.0.0-7.0.1_70.12.0: Failure running command '/usr/TKLC/appworks/bin/eclipseHelp reconfig'
- 1477080521::ERROR: prod.dbdown: unknown option (-i)
- 1517455316::ERROR: Cannot execute command!
- 1517455316::ERROR: CMD: /usr/sbin/hpacucli controller all show config detail
- 1517455316::ERROR: ERROR: No such file or directory
- 1517455316::ERROR: Unable to get the HP disk configuration!
- 1517455316::ERROR: Command Failed!
- 1517455316::ERROR: Child process has exited with
- 1517455316::SYSEERROR: No such file or directory
- 1526453748::ERROR: Cannot reduce filemgmt enough to leave room for dual image upgrade

If the back out was not successful, because other errors were recorded in the logs, then contact [#unique_15/unique_15_Connect_42_GUID-AAD93B71-B4B8-4F1C-83E5-16C9C91CC52E](#) for further instructions. If the back out was successful (no errors or failures), then continue with the remaining steps.

29. Restore the COMCOL Full DB/Run environment, Run the backout_restore utility to restore the full database run environment.

```
$ sudo /var/tmp/backout_restore
*** TRUNCATED OUTPUT ***
This process will totally destroy the existing DB on this server. This
should only be done to recover a server when an upgrade has been backed-
out/rolled-back.
Are you sure you want to proceed? (y|n): y
Answer y to continue the restore.
```

Note

The COMCOL restore process may take several minutes to complete. If the restore was successful, the following displays:

Success: Full restore of COMCOL run env has completed.

If an error is encountered and reported by the utility, then work with [#unique_15/unique_15_Connect_42_GUID-AAD93B71-B4B8-4F1C-83E5-16C9C91CC52E](#) for further instructions.

Note

In some incremental upgrade scenarios, the backout_restore file is not found in the `/var/tmp` directory, resulting in the `/var/tmp/backout_restore: No such file or directory` error message. If this message occurs, copy the file using `sudo` from `/usr/TKLC/appworks/sbin` to `/var/tmp` and repeat the command.

30. Reboot the server. Run the command:

```
$ sudo init 6
```

This step can take several minutes and terminates the SSH session.

31. Use the SSH command (on UNIX systems — or putty if running on Windows) to log into the active NOAM.

```
ssh <NOAM XMI IP address>
login as: admusr
password: <enter password>
```

32. Restore softlink for Comagent directory.

```
[admusr@HPC-N01 ~]$ cd /var/TKLC/appworks/library
$ sudo ln -s /usr/TKLC/comagent-gui/gui/ Comagent
Verify if the Comagent link has been restored:
```

Figure A-51 Comagent link

```
[admusr@HPC-NO1 library]$ ls -ltr
total 56
drwxr-xr-x  7 awadmin awadm 4096 Aug 25  2017 Diameter
lrwxrwxrwx  1 root    root   47 Dec 15 02:05 Zend ->
/usr/TKLC/plat/www/zend-framework/library/Zend/
lrwxrwxrwx  1 root    root   21 Dec 15 02:07 Awps7 ->
/usr/TKLC/awps7/gui/
lrwxrwxrwx  1 root    root   29 Dec 15 02:07 TransportMgr ->
/usr/TKLC/awptransportmgr/gui
lrwxrwxrwx  1 root    root   38 Dec 15 02:07 Exgstack ->
/usr/TKLC/awptransportmgr/gui/Exgstack
drwxr-xr-x  3 awadmin awadm 4096 Dec 31 15:58 Rbar
drwxr-xr-x  4 awadmin awadm 4096 May 22 10:42 AWCLI
drwxr-xr-x  3 awadmin awadm 4096 May 22 10:44 Radius
drwxr-xr-x  4 awadmin awadm 4096 May 22 10:44 Dca
drwxr-xr-x  3 awadmin awadm 4096 May 22 10:44 Fabr
drwxr-xr-x  3 awadmin awadm 4096 May 22 10:44 Gla
drwxr-xr-x  2 awadmin awadm 4096 May 22 10:44 Loadgen
drwxr-xr-x  3 awadmin awadm 4096 May 22 10:44 Mapiwf
drwxr-xr-x  6 awadmin awadm 4096 May 22 10:44 Pdca
drwxr-xr-x  3 awadmin awadm 4096 May 22 10:44 Sbr
drwxr-xr-x  3 awadmin awadm 4096 May 22 10:44 Vstp
lrwxrwxrwx  1 root    root   18 May 22 10:44 Ipfe -> /usr/TKLC/ipfe/gui
drwxr-xr-x  3 awadmin awadm 4096 May 22 10:45 Csbr
drwxr-xr-x 17 awadmin awadm 4096 May 22 10:45 AppWorks
lrwxrwxrwx  1 root    root   27 May 22 11:47 Comagent ->
/usr/TKLC/comagent-gui/gui/
```

If the output is received as highlighted in red, the softlink for Comagent directory has been restored.

33. In the Server CLI, verify if the httpd service has restarted. If this is an NO or SO, verify httpd service is running.

```
sudo systemctl status httpd.service
```

httpd (pid xxxx) is running...

Note

The process IDs are variable so the actual number value can be ignored.

34. If httpd is not running, wait for a few minutes and retry the command. If httpd is still not running after 3 minutes, then services have failed to restart. Contact [#unique_15/unique_15_Connect_42_GUID-AAD93B71-B4B8-4F1C-83E5-16C9C91CC52E](#) for further instructions.
35. Verify if the file id_rsa has required ownership, check the ownership of the file:


```
ls -ltr /home/awadmin/.ssh/
```

The file permission should be defined as shown:

Figure A-52 Permission

```
[root@DSR-Noam1 ~]# ls -lrth /home/awadmin/.ssh/
total 20K
-rw----- 1 awadmin awadm 1.3K Jun  8 2022 config
-rw----- 1 awadmin awadm 571 Oct 18 08:14 id_rsa.pub
-rw----- 1 awadmin awadm 2.6K Oct 18 08:14 id_rsa
-rw----- 1 awadmin awadm 4.5K Oct 18 10:56 authorized_keys
```

If the file ownership is not set for awadmin, then change the permission:

```
sudo chown awadmin:awadm /home/awadmin/.ssh/id_rsa
```

Verify file ownership is changed to awadmin awadm.

36. In the Primary SDS NOAM VIP, verify the server(s) application version and upgrade state. Expand **Administration** select **Software Management** click **Upgrade**. Select the tab containing the server(s) that were backed out. Verify the Application Version value for this server has been backed out to the source release version. Verify the Upgrade State.

Note

Full audit between active NO and backed out server is conducted and it may take up to 10 minutes before the Upgrade State is changed to **Ready**.

37. In the Primary SDS NOAM VIP, set the Max Allowed HA Role to Active. Due to back out being initiated from the command line instead of through the GUI, modify the backed out server so its Upgrade State changes to **Ready**. Expand **Status & Manage** click **HA**. Click **Edit**.
38. Select the backed out server(s) and choose a Max Allowed HA Role value of **Active** (unless it is a **Query server**, in which case the value should remain set to **Observer**). Click **OK**. Verify the Max Allowed HA Role is set.
39. Restart the software, Expand **Status & Manage** click **Server**. If the server(s) that was backed out displays an Appl State, state of **Enabled**, skip to the next step. If the server(s) that was backed out displays an Appl State, state of **Disabled**, select the server(s) and click **Restart**. Click **OK** to confirm. Verify the Appl State changes to **Enabled**.
40. In the Primary SDS NOAM VIP, verify the Upgrade State. Expand **Administration** select **Software Management** click **Upgrade**. Select the tab of the server group containing the server(s) that was backed out. Verify the Upgrade State is now **Ready** (it may take several seconds for the grid to update).
41. Stop the software (if necessary). Due to backout being initiated from the command line instead of through the GUI, modify the Upgrade State of the backed out server(s) to achieve a state of **Not Ready**. Expand **Status & Manage** click **Server**. If the server(s) that was backed out displays an Appl State state of **Enabled**, then select the server(s) and click **Stop**.
42. In the primary SDS NOAM VIP, verify the server(s) Upgrade State. Expand **Administration** select **Software Management** click **Upgrade**. If the server(s) that was backed out displays an Upgrade State of **Not Ready**, then go back to [step 37](#) of this procedure.

43. Complete the backout action (if necessary), If the server(s) that was backed out displays an Upgrade State of **Ready** or **Success**, then:
 - Select the server(s) that was backed out and click **Complete**. Leave the Action set to its default value of **Complete**.
 - Click **OK** to confirm the action.

This changes the **Max Allowed HA Role** of the backed out server(s) to **Active**, which causes the server **Upgrade State** to change to **Not Ready**.

The user may see the following SOAP error display on the GUI banner.

```
SOAP error while clearing upgrade status of hostname=[frame10311b6]
ip=[172.16.1.28]
```

It is safe to ignore this error message.

44. If alarm IDs 10012 and 31226 are visible after completing the backout procedure, then run the following command on query server to clear the alarm manually.

```
alarm.put -e 10012 -s 5 -i oampAgent
```

A.4 Manually Perform ISO Validation

This a procedure assumes that the **ISO** file to be validated has already been uploaded to the server in question and is present in the **/var/TKLC/db/filemgmt/**, **/var/TKLC/db/filemgmt/isos/** or **/var/TKLC/upgrade/** directory.

1. In the Primary SDS NOAM VIP, access the active primary SDS NOAM. Use the VIP address to log into the active primary SDS NOAM with the `admusr` account.

```
sds-rlghnc-a login: admusr
Password: <admusr_password>
*** TRUNCATED OUTPUT ***
RELEASE=6.4
RUNID=00
VPATH=/var/TKLC/rundb:/usr/TKLC/appworks:/usr/TKLC/awpcommon:/usr/TKLC/
comagent-gui:/usr/TKLC/comagent-gui:/usr/TKLC/comagent:/usr/TKLC/sds
PRODPATH=/opt/comcol/prod
RUNID=00
```

2. Verify the ISO file is located in the **/var/TKLC/upgrade/** directory.

```
[admusr@sds-rlghnc-a ~]$ ls /var/TKLC/upgrade/SDS-9.1.0.0_100.17.0-
x86_64.iso
```

3. If the ISO file is not present, copy the ISO file to the **var/TKLC/upgrade/** directory.


```
[admusr@sds-rlghnc-a ~]$ cp -p /var/TKLC/db/filemgmt/
SDS-9.1.0.0_100.17.0-x86_64.iso
/var/TKLC/upgrade/
```

4. Become the `platcfg` user by using the `su` command. For password information, refer to [#unique_33/unique_33_Connect_42_GUID-CCE8D7F5-9E19-4F82-B343-622722BDD7C3](#).

```
[admusr@sds-rlghnc-a ~]$ su - platcfg
Password: <platcfg_password>
```


5. In the Primary SDS NOAM VIP, select the ISO file. From the **platcfg** menu, select **Maintenance** and press **Enter**.

Figure A-53 Maintenance



6. Select **Dual Image Upgrade** and press **Enter**.

Figure A-54 Dual Image Upgrade

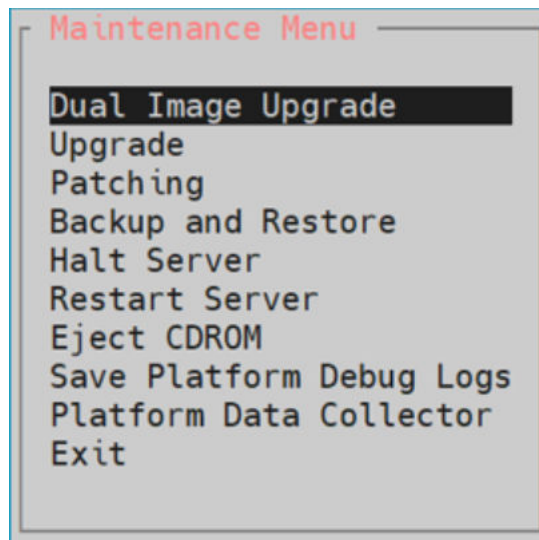

7. Select **Validate Media** and press **Enter**.

Figure A-55 Validate Media




8. Select **Choose Upgrade Media Menu**, select the target ISO file, and press **Enter**.

Figure A-56 Upgrade Media Menu




9. In the Primary SDS NOAM VIP, verify if the ISO media is **Valid**.

Figure A-57 ISO Media

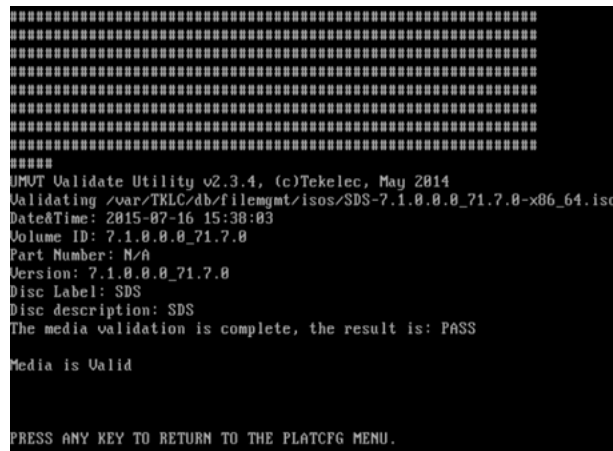


10. Press **Enter** to return to the platcfg menu.
11. In the Primary SDS NOAM VIP, exit from menu. Select **Exit** and press **Enter**.

Figure A-58 Exit




12. Select **Exit** and press **Enter**.

Figure A-59 Upgrade Menu




13. Select **Exit** and press **Enter**.

Figure A-60 Maintenance



14. Select **Exit** and press **Enter**.

Figure A-61 Main Menu



15. In the Primary SDS NOAM VIP, exit the CLI for the Active Primary SDS NOAM.

```
[admusr@sds-r1ghnc-a ~]$ exit
logout
```


16. Return to the procedure step that directed the execution of this procedure.

A.5 Undeploy an ISO File (Post Upgrade Acceptance)

This procedure should only be run post Upgrade Acceptance and removes a deployed **ISO** file from all servers in the SDS topology except the **active primary NOAM** server. At the end of the procedure, the ISO is still present in the `/var/TKLC/db/filemgmt/isos/` directory on the **active primary NOAM** server. Once this procedure is complete, the file may then be manually deleted (if desired) from the SDS NOAM GUI (VIP) under the **Status & Manage** click **Files**.

1. Log in to SDS NOAM GUI, use the VIP address to access the primary SDS NOAM GUI as described in [#unique 43/unique 43 Connect 42 GUID-FA5B2F0E-069F-4C52-99A4-1B05C9FAF6E9](#).
2. In the primary SDS NOAM VIP, Undeploy the ISO. Expand **Status & Manage** click **Files**.

Figure A-62 Files

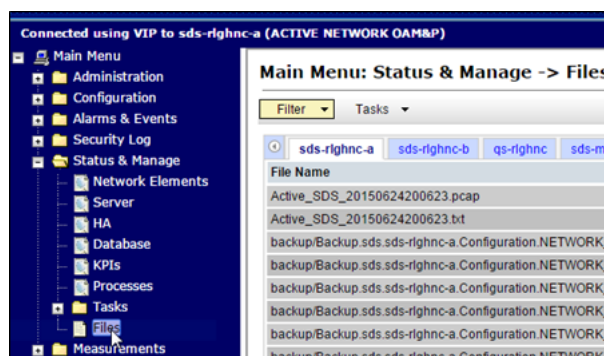

3. Select the ISO file for the target release.

Figure A-63 ISO File

Main Menu: Status & Manage -> Files


Filter Tasks

sds-righnc-a sds-righnc-b qs-righnc sds-mrsvnc-a turks-sds-SO-b turks-DP-01 turks-DP-02

File Name	Size	Type	Timestamp
provimportImport_Rebuild3_msisdncsv	630 B	csv	2015-06-19 17:55:25 UTC
provimportImport_Rebuild4_subscriber.csv	785 B	csv	2015-06-19 17:55:25 UTC
provimportImport_Rebuild5_imsiPrefix.csv	167 B	csv	2015-06-19 17:55:26 UTC
isos/SDS-7.1.0.0.0_71.7.0-x86_64.iso	852.1 MB	iso	2015-06-24 14:23:42 UTC
Active_SDS_20150624200623.pcap	2.6 KB	pcap	2015-06-24 20:08:57 UTC
Active_SDS_20150624200623.txt	46.2 KB	txt	2015-06-24 20:10:08 UTC


4. Click **Undeploy ISO**.

Figure A-64 Undeploy ISO




5. Click **OK**.
6. In the Primary SDS VIP, Monitor the ISO un-deployment status. The Status tab in the banner displays the **ISO undeployment started** confirmation message.

Figure A-65 ISO undeployment message

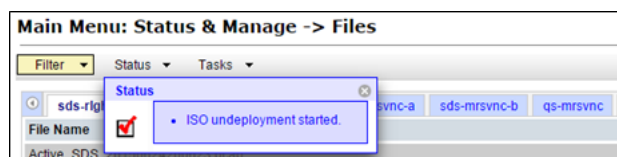


7. Reselect the ISO file for the target release and click **View ISO Deployment Report**.

Figure A-66 ISO Deployment Report

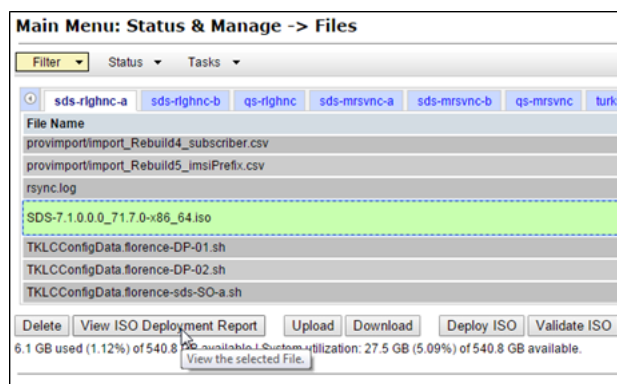

8. The Deployment report indicates the current status of undeployment to all servers in the topology. Click **Back** and then click **View ISO Deployment Report** again to refresh the report.

Figure A-67 Report

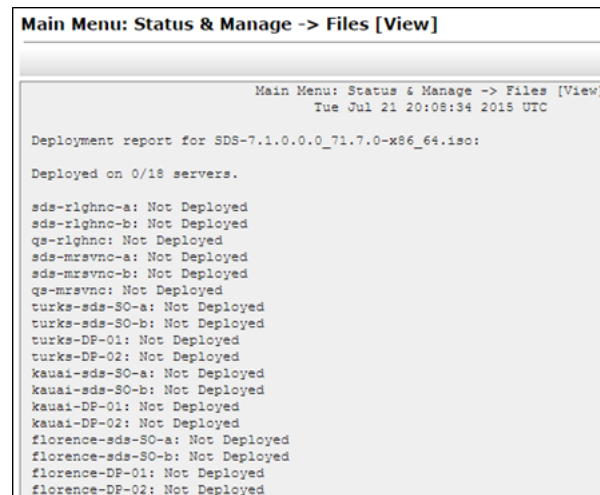


9. Repeat until the ISO displays **Not Deployed** on all servers in the topology.

A.6 Recover from a Failed Upgrade

1. Access the primary SDS NOAM GUI, use the VIP address to access the primary SDS NOAM GUI as described in [#unique_43/unique_43_Connect_42_GUID-FA5B2F0E-069F-4C52-99A4-1B05C9FAF6E9](#).
2. In the primary SDS NOAM VIP, verify upgrade state.
 - a. Expand **Administration** navigate to **Software Management** click **Upgrade**.
 - b. Verify the host name of the primary active SDS NOAM server from the GUI banner.
 - c. Select the Server Group tab for the server(s) being upgraded.
 - d. Verify the **Upgrade State** for each server undergoing the software upgrade and identify any servers with a **Failed** state.

Figure A-68 Server State

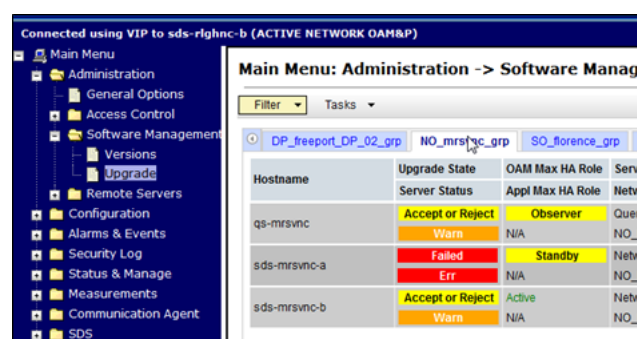


Note

If the **Failed Server** was upgraded using the **Auto Upgrade** option, that is, Auto Server Group Upgrade, then continue to the next step of this procedure. If the **Failed Server** was upgraded using the **Upgrade Server** option, then skip to [step 11](#) of this procedure.


3. In the Primary SDS NOAM VIP, filter the servers that need upgrading. Expand **Status & Manage** navigate to **Tasks** click **Active Tasks**.

Figure A-69 Active Tasks

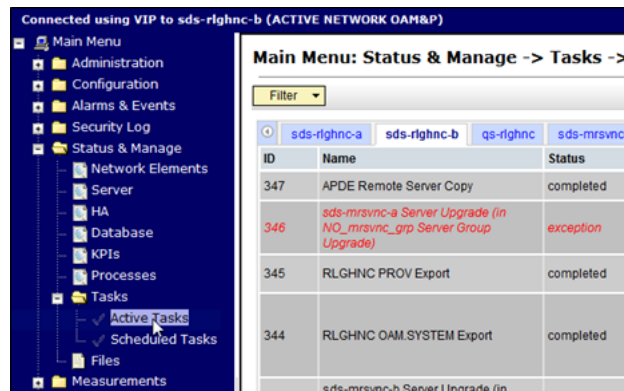

4. From the **Filter** option, enter the following filter values:
 - a. Network Element: **All**
 - b. Display Filter: **Name Like *upgrade***
5. Click **Go**

Figure A-70 Active Status

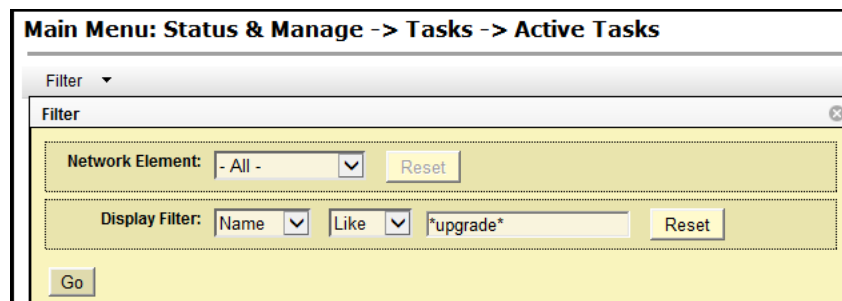

6. In the primary SDS NOAM VIP, locate the Server Group Upgrade task. If not already selected, select the tab displaying the host name of the active SDS NOAM server. Locate the task for the **Server Group Upgrade**. It shows a status of **paused**.

Figure A-71 Server Group Upgrade

Main Menu: Status & Manage -> Tasks -> Active Tasks

Filter ▾

ID	Name	Status	Start Time
346	sds-mrsvnc-a Server Upgrade (in NO_mrsvnc_grp Server Group Upgrade)	exception	2015-08-26 15:02:04
343	sds-mrsvnc-b Server Upgrade (in NO_mrsvnc_grp Server Group Upgrade)	completed	2015-08-26 14:46:03
342	qs-mrsvnc Server Upgrade (in NO_mrsvnc_grp Server Group Upgrade)	completed	2015-08-26 14:46:03
341	NO_mrsvnc_grp Server Group Upgrade	paused	2015-08-26 14:45:55
337	qs-rghnc Server Upgrade	completed	2015-08-26 13:55:59
336	sds-rghnc-a Server Upgrade	completed	2015-08-26 13:54:46
309	sds-rghnc-a Server Upgrade	completed	2015-08-25 14:04:30

Note

Consider the case of an upgrade cycle where it is seen that the upgrade of one or more servers in the server group has the status as exception (that is, failed), while the other servers in that server group have upgraded successfully. However, the server group upgrade task still shows as running. In this case, cancel the running (upgrade) task for that server group before reattempting ASU for the same.

Note

Before clicking **Cancel** for the server group upgrade task, ensure the upgrade status of the individual servers in that particular server group have status as completed or exception (that is, failed for some reason). Make sure you are not canceling a task with some servers still in running state.

7. In the primary SDS NOAM VIP, cancel the Server group Upgrade task.
 - a. Click the Server Group Upgrade task to select it.
 - b. Click **Cancel** to cancel the task.


Figure A-72 Cancel Task

342	qs-mrsvnc Server Upgrade (in NO_mrsvnc_grp Server Group Upgrade)	completed	2015-08-26 14:46:03 UTC
341	NO_mrsvnc_grp Server Group Upgrade	paused	2015-08-26 14:45:55 UTC
337	qs-rghnc Server Upgrade	completed	2015-08-26 13:55:59 UTC

Pause Restart **Cancel** Delete Report Delete All Completed Delete All E

Cancel the selected active Task.

8. Click on the confirmation screen to confirm the cancellation.

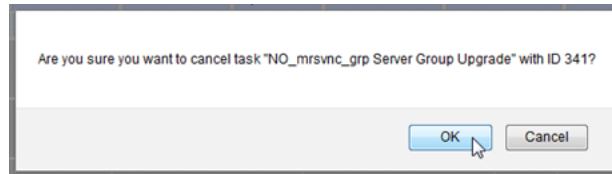Figure A-73 Confirm Cancellation

9. In the primary SDS NOAM VIP, verify if the Server Group Upgrade task is canceled. On the **Active Tasks** screen, verify the Status changed from **paused** to **completed**.

Figure A-74 Status

341	NO_mrsvnc_grp Server Group Upgrade	completed	2015-08-26 14:45:55
-----	------------------------------------	-----------	---------------------

10. Verify the Result Details column now states "SG upgrade task canceled by user."

Figure A-75 SG upgrade task cancelled

2015-08-26 15:27:25 UTC	0	SG upgrade task cancelled by user.	65%
-------------------------	---	------------------------------------	-----

11. Access the failed CLI server, Use the XMI address to log into the failed server with the admusr account.

```
sds-mrsvnc-a login: admusr
Password: <admusr_password>
*** TRUNCATED OUTPUT ***
RELEASE=6.4
RUNID=00
VPATH=/var/TKLC/rundb:/usr/TKLC/appworks:/usr/TKLC/awpcommon:/usr/TKLC/
comagent-gui:/usr/TKLC/comagent-gui:/usr/TKLC/comagent:/usr/TKLC/sds
PRODPATH=/opt/comcol/prod
RUNID=00
```

12. Inspect the upgrade.log file and identify the reason for the failure in the upgrade.log file.

```
[admusr@sds-mrsvnc-a ~]$ tail /var/TKLC/log/upgrade/upgrade.log
1439256874:: INFO: Removing '/etc/my.cnf' from RCS repository
1439256874:: INFO: Removing '/etc/pam.d/password-auth' from RCS repository
1439256874:: INFO: Removing '/etc/pam.d/system-auth' from RCS repository
1439256874:: INFO: Removing '/etc/sysconfig/network-scripts/ifcfg-eth0'
from RCS repository
1439256874:: INFO: Removing '/var/lib/prelink/force' from RCS repository
1439256874::Marking task 1439256861.0 as finished.
1439256874::
```

```
1440613685::Early Checks failed for the next upgrade
1440613691::Look at earlyChecks.log for more info
1440613691::
```

13. Inspect the earlyChecks.log file, identify the reason for the failure in the earlyChecks.log file.

```
[admusr@sds-mrsvnc-a upgrade]$ grep ERROR /var/TKLC/log/upgrade/
earlyChecks.log
ERROR: There are alarms on the system!
ERROR: <<<  OUTPUT  >>>
ERROR:  SEQ: 15 UPTIME: 2070747 BIRTH: 1438969736 TYPE: SET ALARM:
TKSPLATMI10|tpdNTPDaemonNotSynchronizedWarning|
1.3.6.1.4.1.323.5.3.18.3.1.3.10|32509|Communications|Communications
Subsystem Failure
ERROR: <<< END OUTPUT >>>
ERROR: earlyUpgradeChecks() code failed for
Upgrade::EarlyPolicy::TPDEarlyChecks
ERROR: Failed running earlyUpgradeChecks() code
ERROR: Early Upgrade Checks Failed!
```

Note

Although outside of the scope of this document, the user is expected to use standard troubleshooting techniques to clear the alarm condition from the failed server.

If troubleshooting assistance is needed, it is recommended to contact [#unique_15/unique_15_Connect_42_GUID-AAD93B71-B4B8-4F1C-83E5-16C9C91CC52E](#).

Do not proceed to the next step until the alarm condition has been cleared.

14. In the Failed Server (CLI), verify platform alarms are cleared from the failed server. Use the alarmMgr utility to verify all platform alarms have been cleared from the system.

```
[admusr@sds-mrsvnc-b ~]$ alarmMgr -alarmStatus
```

15. Exit the CLI for the failed server.

```
[admusr@sds-mrsvnc-a ~]$ exit
```

logout

16. In the Primary SDS NOAM VIP (GUI), run the server upgrade again. Return to the upgrade procedure being run when the failure occurred. Re-run the upgrade for the failed server using the Upgrade Server option.

Note

Once a server has failed while using the Automated Server Group Upgrade option, the Auto Upgrade option cannot be used again on that server group. The remaining servers in that server group must be upgraded using the Upgrade Server option.

A.7 Add New SOAM Profile on Existing VM

Note

The procedures in this appendix can be run only after the SDS has been upgraded to release 9.1.0 and the upgrade has been accepted.

Note

Updating the SOAM VM profile is an independent procedure from the SDS upgrade and should be scheduled in a separate maintenance window.


This appendix updates the SOAM VM profile to support 1 billion subscribers. This appendix applies only to systems that have been upgraded to release 9.1.0. The upgrade must be accepted before initiating these procedures. The SOAM VMs are updated with the new profile using the following sequence:

1. Remove the SOAM from the SOAM server group
2. Delete the existing SOAM VM and recreate the SOAM VM with the new profile
3. Add the new SOAM VM to the SOAM server group

A.8 Remove the SDS SOAM VM from the SOAM Server Group

1. In the Primary NOAM VIP, log into the NOAM VIP address. Open an approved Web browser (Internet Explorer 8.0, 9.0, or 10.0) and connect to the NOAM VIP address. If a certificate error is received, click on the Continue to this website (not recommended) link.

Figure A-76 Website Security

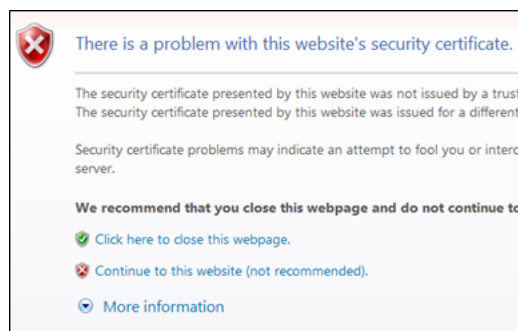

2. Log in to the Primary NOAM VIP using default user name and password.

Figure A-77 NOAM VIP GUI



Oracle System Login

Tue Jun 7 13:49:06 2016 EDT

Log In

Enter your username and password to log in

Username:


Password:

☐ Change password

Unauthorized access is prohibited. This Oracle system requires the use of Microsoft Internet Explorer 9.0, 10.0, or 11.0 with support for JavaScript and cookies.

3. In the Primary SDS NOAM VIP, edit an HA role. Expand **Status & Manage** click **HA**. Click **Edit**.

Figure A-78 Edit

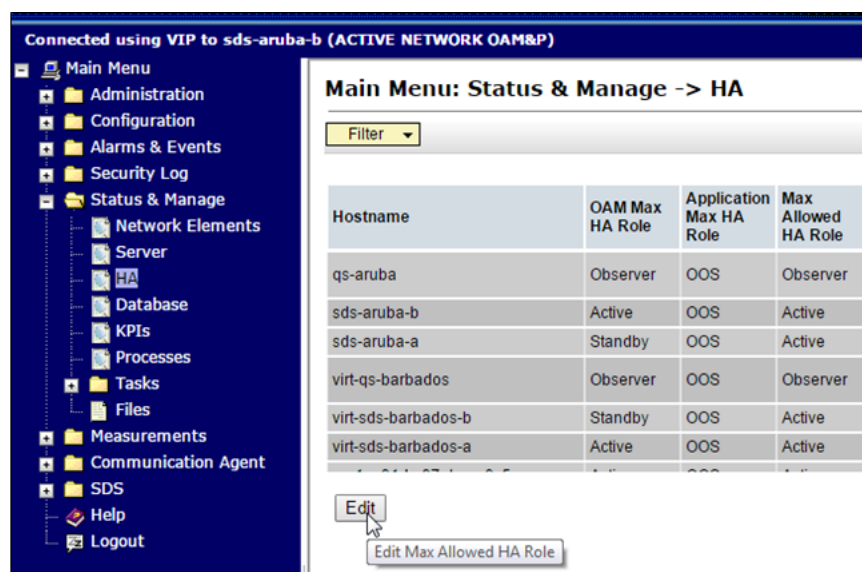

Connected using VIP to sds-aruba-b (ACTIVE NETWORK OAM&P)

Main Menu: Status & Manage -> HA

Filter

Hostname	OAM Max HA Role	Application Max HA Role	Max Allowed HA Role
qs-aruba	Observer	OOS	Observer
sds-aruba-b	Active	OOS	Active
sds-aruba-a	Standby	OOS	Active
virt-qs-barbados	Observer	OOS	Observer
virt-sds-barbados-b	Standby	OOS	Active
virt-sds-barbados-a	Active	OOS	Active

Edit

Edit Max Allowed HA Role

4. In the Primary SDS NOAM VIP, change the SOAM server HA role to **Standby**. Select the active primary SDS SOAM server and change the **Max Allowed HA Role** to **Standby**. Click **OK**.

Figure A-79 Edit HA



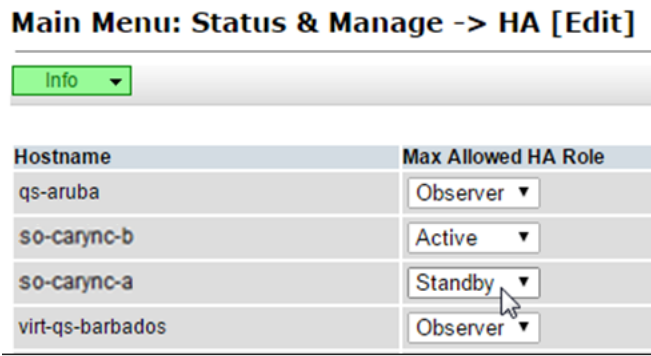


Figure A-80 OK




- 5. In the Primary NOAM VIP, edit the SOAM server. Expand **Configuration** click **Server Groups**.

Figure A-81 Server Groups

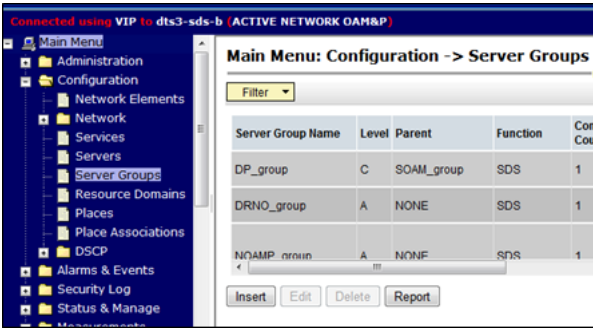


- 6. Select the server group with the SOAM server to be converted to the aB subscriber.

Figure A-82 Select Server Group

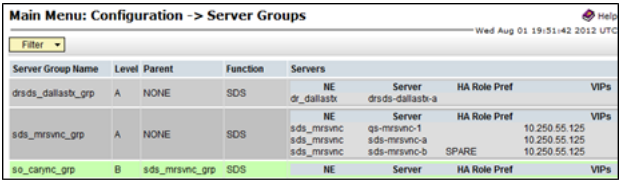

- 7. Click **Edit**.

Figure A-83 Edit




Note

You may need to scroll to see the **Edit** button.


- 8. In the Primary NOAM VIP prepare server for pre-validation. Remove the **SG Inclusion check mark** from the server group.

Figure A-84 SG Inclusion

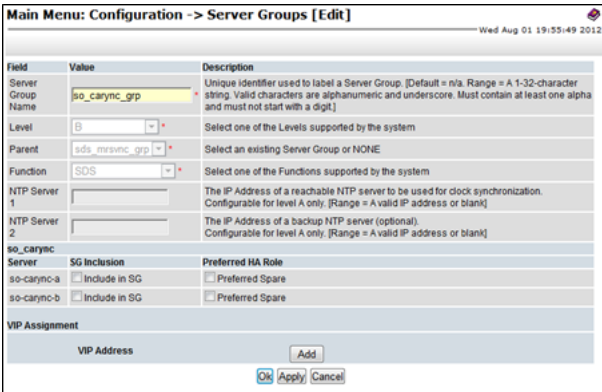

- 9. When the **Pre-Validation passed** message displays, click **Apply**.

Figure A-85 Pre-validation passed

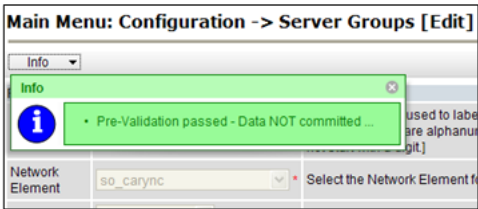

- 10. In the Primary NOAM VIP, Click **Logout** to log out of the SDS GUI.

Figure A-86 Log out




A.9 Recreate the SDS SOAM VM with the 1B Subscriber Profile

For further information, see Common KVM, OpenStack Tasks, OAM Installation for DP-SOAM Sites (All DP-SOAM), and OAM Pairing for DP-SOAM Sites (All DP-SOAM Sites) sections in *Subscriber Data Server Cloud Installation Guide*.

A.10 Place the SDS SOAM VM into the SOAM Server Group

1. In the SDS NOAM VIP, log in to the NOAM VIP address. Open an approved Web browser (Internet Explorer 8.0, 9.0, or 10.0) and connect to the SDS NOAM VIP address. If a certificate error is received, click on the Continue to this website (not recommended) link.

Figure A-87 Web Security

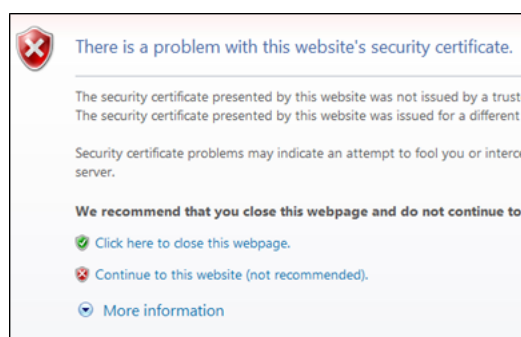


2. In the SDS NOAM VIP, log in using the default user and password.

Figure A-88 NOAM GUI Log in




3. In the SDS NOAM VIP, edit the SOAM server. Expand **Configuration** click **Server Groups**.

Figure A-89 Server Groups

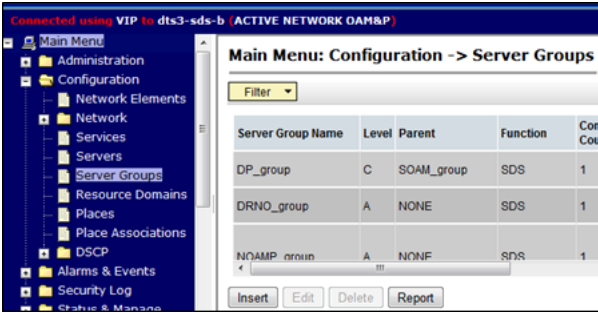


- 4. Select the SOAM server that was converted to the 1B Subscriber profile.

Figure A-90 Select SOAM Server

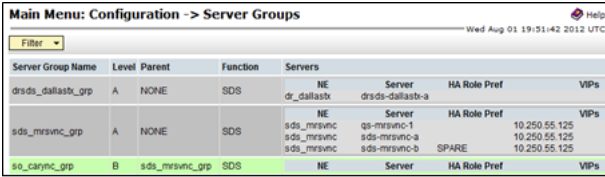

- 5. Click **Edit**.

Figure A-91 Edit



Note

You may need to scroll to see the **Edit** button.


- 6. In the SDS NOAM VIP, prepare the server for pre-validation. Mark the **SG Inclusion** check box for the server.

Figure A-92 SG Inclusion

so_carync		
Server	SG Inclusion	Preferred HA Role
so-carync-a	☒ Include in SG	☐ Preferred Spare
so-carync-b	☒ Include in SG	☐ Preferred Spare


- 7. When the **Pre-Validation** passed message displays, click **Apply**.

Figure A-93 Pre-Validation passed

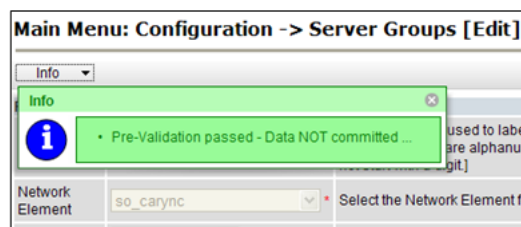


8. The Info banner changes to **Data committed**.

Figure A-94 Data committed

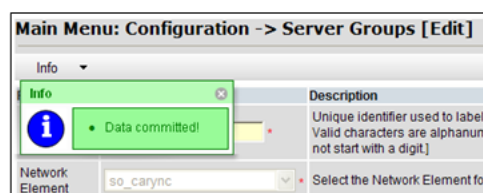


9. In the SDS NOAM VIP, view the alarm status. Expand **Alarms & Events** click **View Active**.

Figure A-95 Alarm Status

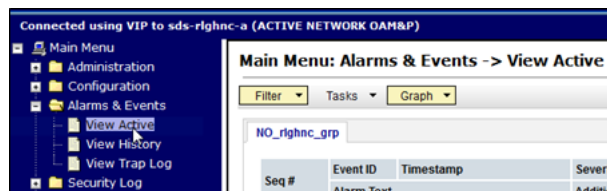

10. Verify if **Event ID 10200 Remote Database re-initialization in progress** is present with the SDS SOAM server host name.

Figure A-96 Event ID

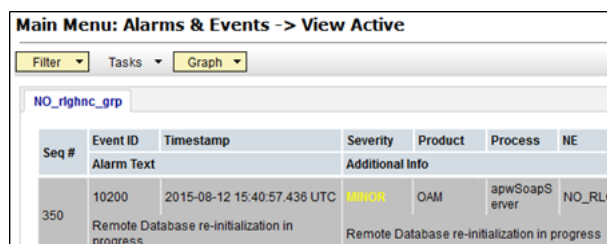


Note

Monitor the Event ID **10200 Remote Database re-initialization in progress** alarm.

Do not proceed to the next step until the alarm clears for the SDS SOAM server.

11. In the SDS NOAM VIP, verify status. Expand **Status & Manage** click **Server**.

Figure A-97 Status

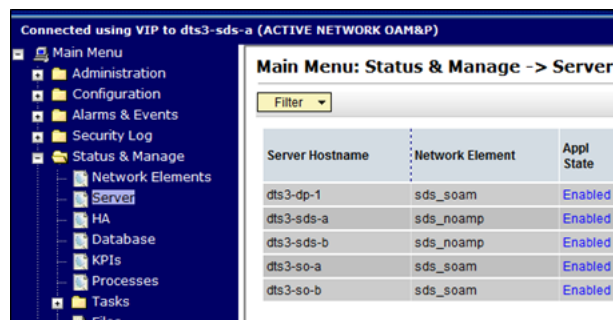

12. Verify Server Status is Normal (Norm) for Database (DB) and Man for Processes (Proc).

Figure A-98 Server Status

Main Menu: Status & Manage -> Server						
Filter						
Network Element	Server Hostname	Appl State	Alm	DB	Reporting Status	Proc
dr_dallastx	drds-dallastx-a	Enabled	Norm	Norm	Norm	Norm
sds_mrsync	sds-mrsync-a	Enabled	Err	Norm	Norm	Norm
sds_mrsync	sds-mrsync-b	Enabled	Norm	Norm	Norm	Norm
sds_mrsync	qs-mrsync-1	Enabled	Norm	Norm	Norm	Norm
so_carync	so-carync-b	Disabled	Warn	Norm	Norm	Man
so_carync	so-carync-a	Enabled	Norm	Norm	Norm	Norm

13. In the SDS NOAM VIP restart the SOAM server.
14. Select the SOAM server.

Figure A-99 Select Server

Main Menu: Status & Manage -> Server						
Filter						
Network Element	Server Hostname	Appl State	Alm	DB	Reporting Status	Proc
dr_dallastx	drds-dallastx-a	Enabled	Norm	Norm	Norm	Norm
sds_mrsync	sds-mrsync-a	Enabled	Err	Norm	Norm	Norm
sds_mrsync	sds-mrsync-b	Enabled	Norm	Norm	Norm	Norm
sds_mrsync	qs-mrsync-1	Enabled	Norm	Norm	Norm	Norm
so_carync	so-carync-b	Disabled	Warn	Norm	Norm	Man
so_carync	so-carync-a	Enabled	Norm	Norm	Norm	Norm


15. Click **Restart**.

Figure A-100 Restart




16. Click **OK** to confirm.

Figure A-101 OK

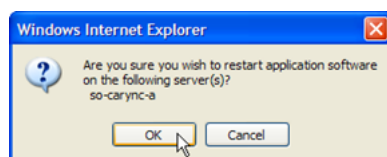


17. A **Successfully restarted application** message displays in the banner.

Figure A-102 Successfully restarted application

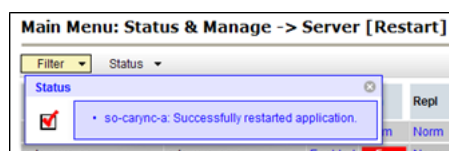


18. In the SDS NOAM VIP, verify status. Expand **Status & Manage** click **Server**

Figure A-103 Server Status

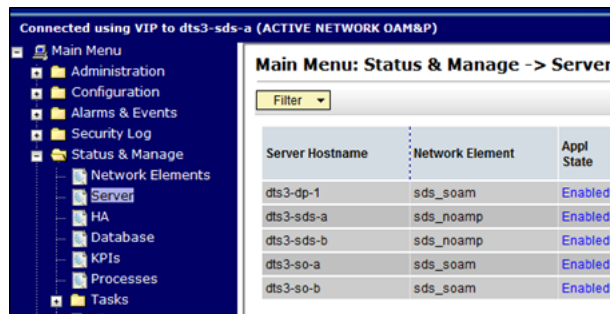


19. Verify Appl State is **Enabled** and Server Status is Normal (**Norm**) for Alarm (Alm), Database (DB), Reporting Status, and Processes (Proc).

Figure A-104 Server State

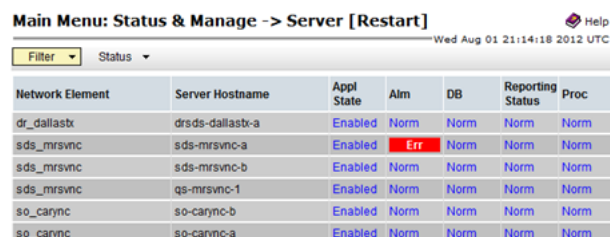

20. Log out from the SDS NOAM VIP. Click **Logout** to log out of the SDS GUI.

Figure A-105 Log out




21. Run SDS Health Check procedures as specified in [#unique_22/unique_22_Connect_42_GUID-8C8E13D3-8EA1-4275-8DF2-94BF4D450E98](#).

A.11 Manual Completion of Server Upgrade

This procedure is performed to recover a server that did not properly complete an upgrade. This procedure should be performed only when directed by MOS or by another procedure within this document. In the normal upgrade scenario, the steps in this procedure are automatically performed by the upgrade process.

1. In the primary SDS NOAM VIP, edit the Max Allowed HA Role. Expand **Status & Manage** and click **HA**. Locate the server to be completed and verify if the Max Allowed HA Role is in Standby mode.

Figure A-106 HA

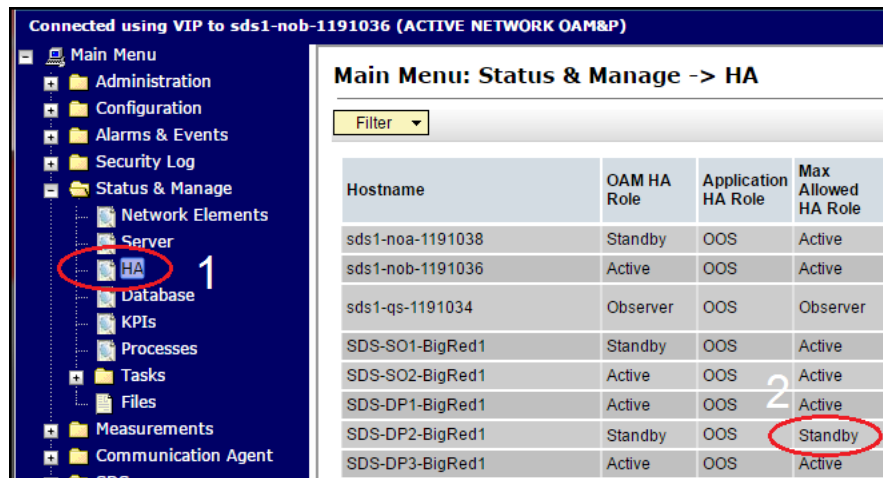

2. Click Edit.

Figure A-107 Edit

Main Menu: Status & Manage -> HA

Filter ▼

Hostname	OAM HA Role	Application HA Role	Max Allowed HA Role
sds1-noa-1191038	Standby	OOS	Active
sds1-nob-1191036	Active	OOS	Active
sds1-qs-1191034	Observer	OOS	Observer
SDS-SO1-BigRed1	Standby	OOS	Active
SDS-SO2-BigRed1	Active	OOS	Active
SDS-DP1-BigRed1	Active	OOS	Active
SDS-DP2-BigRed1	Standby	OOS	Standby

Edit 3

3. Change the Max Allowed HA Role to Active.
4. Click OK.

Figure A-108 HA Status Active

Main Menu: Status & Manage -> HA [Edit]

Hostname	Max Allowed HA Role
sds1-noa-1191038	Active ▼
sds1-nob-1191036	Active ▼
sds1-qs-1191034	Observer ▼
SDS-SO1-BigRed1	Active ▼
SDS-SO2-BigRed1	Active ▼
SDS-DP1-BigRed1	Active ▼
SDS-DP2-BigRed1	Active ▼

4

5 Ok Cancel

5. In the primary SDS NOAM VIP, verify the Max Allowed HA Role changes to **Active**.

Figure A-109 Max allowed HA Role


Main Menu: Status & Manage -> HA

Filter ▼

Hostname	OAM HA Role	Application HA Role	Max Allowed HA Role
sds1-noa-1191038	Standby	OOS	Active
sds1-nob-1191036	Active	OOS	Active
sds1-qs-1191034	Observer	OOS	Observer
SDS-SO1-BigRed1	Standby	OOS	Active
SDS-SO2-BigRed1	Active	OOS	Active
SDS-DP1-BigRed1	Active	OOS	Active
SDS-DP2-BigRed1	Active	OOS	Active

- In the primary SDS NOAM VIP, re-start the server. Expand **Status & Manage** click **Server**. Select the server to be completed and click **Restart**.


Figure A-110 Restart

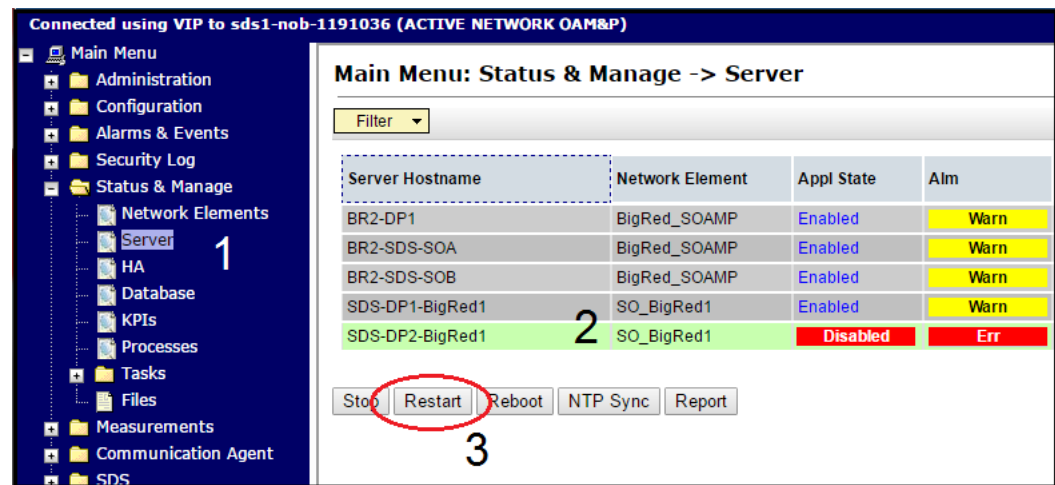

After a few minutes, the Appl State changes to **Enabled**.

- In the primary SDS NOAM VIP, verify server completion. Expand **Administration** navigate to **Software Management** click **Upgrade**. Verify the Upgrade State changes to **Accept or Reject** and the status message changes to **Success: Server manually completed**.

Figure A-111 Accept or Reject

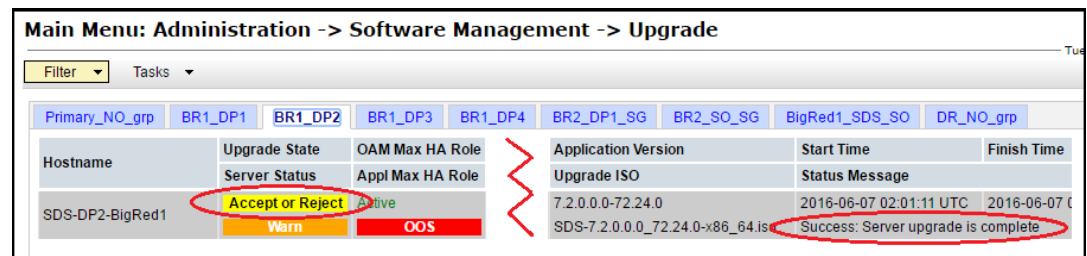

A.12 Workaround to Resolve Server HA Failover Issue

This procedure resolves the HA failover issue by restarting the cmha process on the server.

- Log into the server CLI, use the SSH command (on UNIX systems – or putty if running on Windows) to log into the NOAM server which is experiencing the HA failover issue.

```
ssh admusr@<server address>
```

```
password: <enter password>
```

Answer **yes** if you are asked to confirm the identity of the server.

- Resolve HA failover issue(s), run the command:

```
sudo pm.kill cmha
```

- Repeat procedure on each affected server, if required. Return to procedure/step in upgrade process which pointed to refer this procedure.


A.13 Workaround for SNMP Configuration

This procedure configures or updates the SNMP with **SNMPv2c and SNMPv3** as the enabled versions for SNMP traps configuration, as PMAC does not support SNMPv3.

Perform this workaround step in the following cases:


- If SNMP is not configured.
 - If SNMP is already configured and SNMPv3 (V3Only) is selected as enabled version.
1. Login to the NOAM VIP GUI using the VIP. Expand **Administration** navigate to **Remote Servers** click **SNMP Trapping**. Select the Server Group tab for SNMP trap configuration:

Figure A-112 Remote Servers

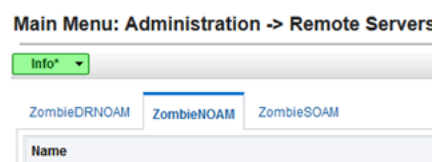

2. In the NOAM VIP GUI, configure or update system-wide SNMP trap receiver(s). Type the IP address or hostname of the Network Management Station (NMS) where you want to forward traps. This IP should be reachable from the NOAMP's XMI network. If already configured SNMP with SNMPv3 as enabled version, another server needs to be configured here.
3. Continue to fill in additional secondary, tertiary, etc., Manager IPs in the corresponding slots if desired.

Figure A-113 Manager IPs

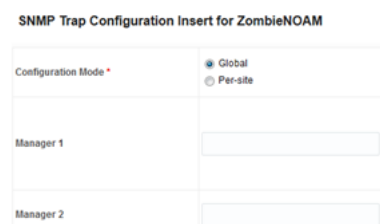

4. Set the Enabled Versions as SNMPv2c and SNMPv3.

Figure A-114 Enabled Versions



Note

In case, enabled versions of already configured SNMP is V3Only, then update the enabled versions as above.

5. Mark the Traps Enabled checkboxes for the Manager servers being configured.

Figure A-115 Traps Enabled

Traps Enabled	☐ Manager 1
	☐ Manager 2
	☐ Manager 3
	☐ Manager 4
	☐ Manager 5

6. Type the SNMP Community Name.

Figure A-116 SNMP Community Name

SNMPv2c Read-Only Community Name	
SNMPv2c Read-Write Community Name	

7. Leave all other fields at their default values, click **OK**.
8. Log in to PMAC GUI. If needed, open a web browser and enter the command `http://<pmac_management_ip>`. Log in as the `pmacadmin` user.
9. In the PMAC GUI, update the TVOE host SNMP community string. Expand the folder **Administration** navigate to **Credentials** click **SNMP Community String Update**. Select the "Use Site Specific Read/Write Community String" option.

Figure A-117 Read/Write Option

Select **Read Only** or **Read/Write** Community String:

☐ Read Only ☒ Read/Write

Check this box if updating servers using the **Site Specific** SNMP Community String:

☒ Use Site Specific **Read/Write** Community String

Community String:

Note: The Community String value can be 1 to 31 uppercase, lowercase, or numeric characters.

Update Servers

10. Click Update Servers.

Figure A-118 Update Server

11. Click OK.
12. Return to the procedure step that directed the execution of this procedure.

A.14 Workaround to Resolve Syscheck Error for CPU Failure

This procedure resolves the syscheck errors for CPU failure.

1. Log into server using CLI on which syscheck is failing, use the SSH command (on UNIX systems – or putty if running on windows) to log into the server identified.

```
ssh admusr@<SERVER_XMI>
password: <enter password>
```

Answer **yes** if you are asked to confirm the identity of the server.

2. In the server CLI, run the workaround:
 - a. Edit the cpu config file.

```
$ sudo vim /usr/TKLC/plat/lib/Syscheck/modules/system/cpu/config
```

- b. Comment out the text that reads: "EXPECTED_CPUS=" by putting # in the beginning of the line. For example: # EXPECTED_CPUS=2
 - c. Save the cpu config file.
 - d. Reconfig the syscheck, run the following commands:

```
sudo syscheck --unconfig
sudo syscheck --reconfig
sudo syscheck
```

CPU related errors do not display.

A.15 Workaround to Fix cmsoapa Restart

When the upgrade path is from 7.x, 8.0 to 8.1, the cmsoapa process continuously restarts on the lower-level node after the higher-level node has been upgraded, that is, on SOAM after NOAM was upgraded and on DP server after SOAM has been upgraded.

1. Log in to the NOAM VIP GUI. If not already done, establish a GUI session on the NOAM server the VIP IP address of the NOAM server. Open the web browser and enter a URL of:


```
http://<Primary_NOAM_VIP_IP_Address>
```
2. Log into the NOAM GUI as the guiadmin user.

Figure A-119 NOAM VIP GUI Log in

3. In the NOAM VIP GUI, identify the servers with the 31201 alarm for the cmsoapa process not running.
 - a. Navigate to current alarm details and identify the server on which 31201 - Process Not Running alarm is getting raised for Instance as cmsoapa.
 - b. Expand **Alarms & Events** click **View Active**.
 - c. Look for "31201" alarm instances and make a list of servers with the cmsoapa alarm instance.
4. Login into Server using CLI on which cmsoapa is restarting. Use the SSH command (on UNIX systems – or putty if running on windows) to log into the server identified.

```
ssh admusr@<SERVER_XMI>
password: <enter password>
```

Answer **yes** if you are asked to confirm the identity of the server.

5. In the server CLI, run the workaround.
 - a. Enter the command `$ sudo prod.dbdown`.
 - b. After few minutes, when processes are down. Run `prod.start`. Enter the command `$ sudo prod.start`.
 - c. Repeat the steps on all server(s) where the alarm is, that is, where the cmsoapa process is restarting.

A.16 Workaround to Fix DNS Issue

After completing upgrade of SDS primary query server, if DNS resolution fails, perform the following steps:

1. Verify the QS server transitions to a "A" State, log in to QS Server with the admusr account. Run the command:

```
[admusr@SG2-SDS-QS ~]$ sudo prod.state
...prod.state RUNID=00)...
...getting current state...
Current state: A (product under procmgr)
```

- a. If current state is "A", stop and continue completing the upgrade.
 - b. If not, then continue to the next step.
2. Verify the permissions of the /etc/resolv.conf file is 644. Execute:

```
[admusr@SG2-SDS-QS ~]$ ll
/etc/resolv.conf
-rw-r--r-- 1 root root 73 Feb 21 19:47 /etc/resolv.conf
```

3. Verify the /etc/resolv.conf file contains the upgraded standby server. Check the file content:

```
[admusr@SG2-SDS-QS ~]$ sudo cat
/etc/resolv.conf<Primary Server
A><Primary Server
B><Secondary Server
B>
```

If not, checkout and edit the file as shown using the steps below.

4. Using the rcstool checkout the /etc/resolv.conf file.

```
[admusr@SG2-SDS-QS ~]$ sudo
rcstool co /etc/resolv.conf
RCS_VERSION=x.x
```

5. Edit the /etc/resolv.conf file.

```
[admusr@SG2-SDS-QS ~]$ sudo vi /etc/resolv.conf
```

6. Double Check that the /etc/resolv.conf file updates are as desired from edit above.

```
[admusr@SG2-SDS-QS ~]$ sudo cat /etc/resolv.conf
<Primary Server A>
<Primary Server B>
<Secondary Server B>
```

7. Using the rcstool check in the /etc/resolv.conf file.

```
[admusr@SG2-SDS-QS ~]$ sudo rcstool ci /etc/resolv.conf
```

8. Clear DNS cache using the nscd command.

```
[admusr@SG2-SDS-QS ~]$ sudo nscd -i hosts
```

9. Verify the QS server transitions to a "A" State.

```
[admusr@SG2-SDS-QS ~]$ sudo prod.state
...prod.state (RUNID=00)...
...getting current state...
Current state: A (product under procmgr)
```

A.17 Emergency Response

In the event of a critical service situation, emergency response is offered by the CAS main number at 1-800-223-1711 (toll-free in the US), or by calling the Oracle Support hotline for your local country from the list at <http://www.oracle.com/us/support/contact/index.html>. The emergency response provides immediate coverage, automatic escalation, and other features to ensure that the critical situation is resolved as rapidly as possible.

A critical situation is defined as a problem with the installed equipment that severely affects service, traffic, or maintenance capabilities, and requires immediate corrective action. Critical situations affect service and/or system operation resulting in one or several of these situations:

- A total system failure that results in loss of all transaction processing capability
- Significant reduction in system capacity or traffic handling capability
- Loss of the system's ability to perform automatic system reconfiguration
- Inability to restart a processor or the system
- Corruption of system databases that requires service affecting corrective actions
- Loss of access for maintenance or recovery operations
- Loss of the system ability to provide any required critical or major trouble notification

Any other problem severely affecting service, capacity/traffic, billing, and maintenance capabilities may be defined as critical by prior discussion and agreement with Oracle.

A.18 Locate Product Documentation on the Oracle Help Center

Oracle Communications customer documentation is available on the web at the Oracle Help Center (OHC) site, <http://docs.oracle.com>. You do not have to register to access these documents. Viewing these files requires Adobe Acrobat Reader, which can be downloaded at <http://www.adobe.com>.

1. Access the Oracle Help Center site at <http://docs.oracle.com>
2. Click Industries.
3. Under the Oracle Communications subheading, click the "Oracle Communications documentation" link. The Communications Documentation page appears. Most products covered by these documentation sets will appear under the headings "Network Session Delivery and Control Infrastructure" or "Platforms."
4. Click on your Product and then the Release Number. A list of the entire documentation set for the selected product and release appears.
5. To download a file to your location, right-click the PDF link, select Save target as (or similar command based on your browser), and save to a local folder.

A.19 Restoring Custom MySQL User

Perform the following procedure to restore custom MySQL users:

1. Log in to the query server as **admin user**.

2. Run the following commands on the query server to create a new directory:

```
cd /var/TKLC/db/filemgmt
```

```
mkdir user_backup_restore
```

3. Download and copy the script to the following path /var/TKLC/db/filemgmt/user_backup_restore.

Script file - [Script](#)

4. Run the following command to provide permission to the script:

```
chmod 777 restore_mysqluser.py
```

5. Run the script using the following command:

```
cd /var/TKLC/db/filemgmt/user_backup_restore
```

```
./restore_mysqluser.py
```

An output file (DUMP_COMMANDS_<YYYY_MM_DD_HR_MIN_SEC>.sql) is generated in the following path /var/TKLC/db/filemgmt/user_backup_restore.

6. Run the following command on MySQL database to retrieve custom users configured:

```
select user from mysql.user;
```

7. Perform the [SDS upgrade](#).

8. After the upgrade is completed, run the following restore command:

```
cd /var/TKLC/db/filemgmt/user_backup_restore
```

```
sudo Imysql -uroot -pImysql23root mysql <  
DUMP_COMMANDS_<YYYY_MM_DD_HR_MIN_SEC>.sql
```

For example:

```
sudo Imysql -uroot -pImysql23root mysql <  
DUMP_COMMANDS_2023_10_30_07_17_19.sql
```

9. Run the following command on MySQL database, to ensure custom users are restored:

```
select user from mysql.user;
```

10. Compare the output of step 6 and 9 to ensure the script has successfully restored the MySQL custom users.

11. To remove the following files:

- old user file (user_<YYYY_MM_DD_HR_MIN_SEC>.txt)
- log file (log_create_sql_<YYYY_MM_DD_HR_MIN_SEC>.txt)
- .sql generated files (DUMP_COMMANDS_<YYYY_MM_DD_HR_MIN_SEC>)

- .sql, (USER_COMMANDS_<YYYY_MM_DD_HR_MIN_SEC>.sql)

Run the following command:

```
./restore_mysqluser.py --clean
```

B

Dual Hop Upgrade from SDS-8.6.x to SDS-9.0.2 Using Ansible

This section provides information and the procedure for Dual Hop Upgrade from release 8.6.x VM to SDS 9.0.2 VM or above release.

Note

Points to be considered during Dual Hop upgrade:

- Use only `admusr` as username for all the commands.
- Do not perform ISO deployment for Dual Hop Upgrade.
- During "Fatal Error", the server cannot be restored, a new server build is required. The server must be rebuilt using the same DSR release of its mate server.
- During typical failure, the system can be restored using the following command:
`/var/TKLC/backout/diUpgrade --clearError`
- In case of upgrade failure due to an early check, restart the server prior to retrying the upgrade.
- This procedure is applicable for VSTP installation as well.
- SDS must be upgraded before DSR.
- For the User Data Repository upgrade, refer to User Data Repository upgrade document.
- Backout is not supported for OL6 to OL8 Upgrade (DSR-8.6 to DSR-9.0).
- `majorUpgrade.sh` will run the dual hop upgrade command and copy the ISO file to the required path. In order to perform the upgrade, it will also install Ansible RPM.

Prerequisites

- SDS 9.0.2.0.0 requires more disk space and RAM capacity. Hence, create flavor to resize the instance and refer to *DSR Cloud Benchmarking Guide* for flavor details.
- Ensure the instance which must be upgraded does not contain any alarms. To check the alarm status before triggering the upgrade, run the following command:

```
alarmMgr --alarmStatus
```

- Space utilization should be less than 70% for all partitions and no hard disk alarm should be present. Run the following command to check:

```
df -kh
```

- Download the `dualHopUpgrade.tar.gz` file from [Oracle Software Delivery Cloud](#) (OSDC) site. Extract the file to retrieve the following files, which are required to perform this upgrade:

- pre_upgrade_check.sh
- extend_partition.sh
- post_partition.sh
- diuMajHosts
- vault.yml
- majorUpgrade.sh

Note

Backout is not supported for OL6 to OL8 upgrade (DSR 8.6 to 9.0).

The following table provides the time required by each task while performing Dual Hop Upgrade (DIU) from SDS 8.6.X VM to SDS 9.0.x VM.

Table B-1 Time Required for Dual Hop Upgrade

Procedure	Time Required (hr:min)	Reference
Step 1	0:10 - 0:20 for each VM	Resizing all the Instances in the Setup
Step 2	0:10 - 0:20 for each VM	Extending the Partition
Step 3	0:20 - 0:30	Setting up the Active NOAM as Controller
Step 4	0:40 - 0:60	Upgrading Standby NOAM
Step 5	0:05 - 0:10	Configuring Upgraded Standby NOAM
Step 6	0:05 - 0:10	Setting up Active NOAM as Controller
Step 7	0:40 - 0:60 for each Group	Upgrading Other Servers


B.1 Resizing all the Instances in the Setup

Note

For procedure to resizing instances if the setup used is in KVM environment, see [Resizing Instances if Setup is in KVM Environment](#).


1. Login to OpenStack GUI.
2. Shutdown the instance.
3. Select **Resize Instance** option and configure the required flavour.

Figure B-1 Resizing Instance

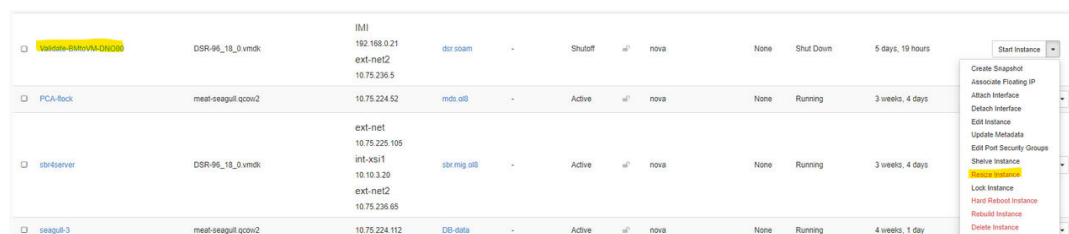

4. Select the instance and click **Confirm Resize**.

Figure B-2 Confirm Resize



5. Start the instance.

B.1.1 Resizing Instances if Setup is in KVM Environment

Note

Perform this procedure on the Host where VM is deployed.

1. Shutdown VM by running the following command:

```
virsh shutdown <VM Name>
```

Wait for the VM to shut down.

2. Run the following commands:

```
virsh dumpxml <VM Name> | grep 'disk type' -A 5
```

Output:

```
[root@ol-server ~]# virsh dumpxml Dsrtestsetup-Noam1 | grep 'disk type' -A 5
5
<disk type='file' device='disk'>
<driver name='qemu' type='qcow2' />
<source file='/mnt/data/ova/Dsrtestsetup-Noam1.qcow2' />
<target dev='vda' bus='virtio' />
<address type='pci' domain='0x0000' bus='0x05' slot='0x00' function='0x0' />
</disk>
```

```
qemu-img info {{ path with image name }}.qcow2
```

Output:

```
[root@ol-server ~]# qemu-img info /mnt/data/ova/Dsrtestsetup-Noam1.qcow2
image: /mnt/data/ova/Dsrtestsetup-Noam1.qcow2
file format: qcow2
virtual size: 120 GiB (128849018880 bytes)
disk size: 7.56 GiB
cluster_size: 65536
Format specific information:
  compat: 1.1
  compression type: zlib
  lazy refcounts: false
```

```
refcount bits: 16  
corrupt: false
```

```
qemu-img resize {{ path with image name }}.qcow2 +<additional required  
size>G
```

Output:

```
[root@ol-server ~]# qemu-img resize /mnt/data/ova/Dsrtestsetup-Noam1.qcow2  
+40G  
Image resized.
```

3. Verify VM size, by running the following command:

```
qemu-img info {{ path with image name }}.qcow2 (To verify VM size)
```

Output:

```
[root@ol-server ~]# qemu-img info /mnt/data/ova/Dsrtestsetup-Noam1.qcow2  
image: /mnt/data/ova/Dsrtestsetup-Noam1.qcow2  
file format: qcow2virtual size: 160 GiB (171798691840 bytes)  
disk size: 7.56 GiB  
cluster_size: 65536  
Format specific information:  
  compat: 1.1  
  compression type: zlib  
  lazy refcounts: false  
  refcount bits: 16  
  corrupt: false  
  extended l2: false
```

4. Start VM by running the following command:

```
virsh start <VM Name>
```

B.2 Extending the Partition

1. Provide chmod 777 permission to all the scripts.
2. Download the scripts from the tar file and place it in /home/admusr directory.
3. Run the following command:

```
sudo ./extend_partition.sh
```

4. Restart the server.

```
sudo init 6
```

5. Run the following commands:

```
sudo ./post_partition.sh.
```

```
sudo ./pre_upgrade_check.sh
```

Note

This is a manual step and must be run on all the servers.

6. Switchover the roles from Standby to Active and Active to Standby.

Note

- Resize new standby, by performing [Resizing all the Instances in the Setup](#) and [Extending the Partition](#) procedures.
- For NOAM, SOAM, and IPFE, perform [Resizing all the Instances in the Setup](#) and [Extending the Partition](#) procedures on both Standby and Active.
- For DAMP, perform [Resizing all the Instances in the Setup](#) and [Extending the Partition](#) procedures except Switchover step.

B.3 Setting up the Active NOAM as Controller

1. Place the TPD OL7 DIU ISO and SDS DIU ISO on /var/TKLC/db/filemgmt of Active NOAM.
2. Create diuMajHosts file in /home/admusr of Active NOAM.

Note**Description of diuMajHosts file:**

- image_name_tpd: TPD OL7 DIU ISO name should be given
- image_name_sds: SDS DIU ISO name should be given

For the SDS Dual hop upgrade, use the groups as mentioned below:

- Divide the servers into the groups with the xmi IP of the servers that need to be upgraded, as shown in the example below.
- group1 → We have included the IP of Standby Noam in group1, as this would be the first server we want to upgrade.
- group2 → In this group Active Noam IP is included. (Standby noam after switchover) and Query Server
- group3 → This group will contain the IP of Standby Soam.
- group4 → This group will contain the IP of Active Soam.
- group5 and group6 → These groups will contain 50% of C-level servers respectively.

There can be n number of groups in the below file.

Host name (host1, host2....) must be different for different groups.

For example:

```
[all:vars]
image_name_tpd=TPD OL7 DIU ISO
image_name_sds=SDS DIU ISO

[group1]
host1 ansible_host=<XMI IP of StandBy NOAM>  ansible_user=admusr
ansible_port=22

[group2]
host2 ansible_host=<XMI IP of Active NOAM>  ansible_user=admusr
ansible_port=22
host3 ansible_host=<XMI IP of Query Server>  ansible_user=admusr
ansible_port=22

[group3]
host4 ansible_host=<XMI IP of Standby SOAM> ansible_user=admusr
ansible_port=22

[group4]
host5 ansible_host=<XMI IP of Active SOAM> ansible_user=admusr
ansible_port=22

[group5]
host6 ansible_host=10.75.237.93  ansible_user=admusr ansible_port=22  -----
> DMP00
.
.
```

```
.
[group6]
host8 ansible_host=10.75.237.141ansible_user=admusr ansible_port=22  -----
> DMP01
.
.
.
```

3. Create the `vault.yml` file in `/home/admusr` of Active NOAM.

```
ansible_ssh_pass: secret_password(password for admusr)
```

4. Place the `majorUpgrade.sh` script in `/var/TKLC/db/filemgmt` of Active NOAM.
5. Run the following command:

```
chmod 777 /var/TKLC/db/filemgmt/majorUpgrade.sh
```

B.4 Upgrading Standby NOAM

- Run the following commands on the Active NOAM Shell.

```
cd /var/TKLC/db/filemgmt
```

```
./majorUpgrade.sh upgrade group1
```

B.5 Verifying Upgrade

Perform the following steps to verify whether the upgrade is successful on a particular host.

1. To print the logs whether the upgrade is successful, run the `majorUpgrade.sh` script.

Note

Before starting with the next step run `majorUpgrade.sh` script on every group.

2. Run the following command on the instance which was upgraded:

```
sudo verifyUpgrade
```

If the upgrade is successful, the above command would not return any output.

B.6 Configuring Upgraded Standby NOAM

1. Login to Active NOAM.
2. Navigate to **Status & Manage** from **Main Menu**, then select **HA**.
3. Click **Edit** and update the **Max Allowed HA Role** value of Active NOAM to Standby, then click **Ok**.
4. Login to Standby NOAM from GUI, which is now the Active NOAM.

5. Navigate to **Status & Manage** from **Main Menu**, then select **HA**.
6. Click **Edit** and update the **Max Allowed HA Role** value of Standby NOAM to **Active**, then click **Ok**.

B.7 Setting up Active NOAM as Controller

1. Copy `majorUpgrade.sh` file from Standby NOAM to Active NOAM in `/var/TKLC/db/filemgmt` path, by performing the following steps:
 - a. SSH to Standby NOAM console.
 - b. Navigate to `/var/TKLC/db/filemgmt` path.
 - c. Run the following command to copy the `majorUpgrade.sh` script to file management path of Active NOAM:

```
scp majorUpgrade.sh admusr@<Active Noam IP>:/var/TKLC/db/filemgmt
```

2. Copy `diuMajHosts` and `vault.yml` files from Standby NOAM to Active NOAM in `/home/admusr` path, by performing the following steps:
 - a. SSH to Standby NOAM console.
 - b. Navigate to `/home/admusr/` path.
 - c. Run the following command to copy the `diuMajHosts` and `vault.yml` files to `/home/admusr` path of Active NOAM:

```
scp diuMajHosts admusr@<Active Noam IP>:/home/admusr
```

```
scp vault.yml admusr@<Active Noam IP>:/home/admusr
```

B.8 Upgrading Other Servers

- Run the following commands to upgrade remaining servers:

```
cd /var/TKLC/db/filemgmt
```

```
./majorUpgrade.sh upgrade group2
```

```
./majorUpgrade.sh upgrade group3
```

Note

Run this command for all remaining groups.