

Oracle® Communications
EAGLE Element Management System Reporting Studio

Upgrade/Installation Guide

Release 47.0.0.2.0

G58109-01

October 2026

ORACLE®

Copyright © 2013, 2026, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notices are applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.



CAUTION: Use only the guide downloaded from the Oracle Technology Network (OTN) (<http://www.oracle.com/technetwork/indexes/documentation/oracle-comms-tekelec-2136003.html>). Before upgrading your system, access the My Oracle Support web portal (<https://support.oracle.com>) and review any Knowledge Alerts that may be related to the System Health Check or the Upgrade.

Before beginning this procedure, contact My Oracle Support and inform them of your upgrade plans.

Refer to Appendix B for instructions on accessing My Oracle Support.

Table of Contents

1.0	INTRODUCTION	7
1.1	Purpose and Scope	7
1.2	Acronyms and Terminology	7
2.0	SOFTWARE REQUIREMENTS	8
3.0	INSTALLATION/UPGRADE OF REPORTING STUDIO R47.0.0.2.0 (I-NET CLEAR REPORTS <version>)	9
3.1	Prerequisite	9
3.2	Installation of Reporting Studio	11
3.3	Configuration of i-net Clear Reports	18
4.0	CHECKING IF I-NET IS INSTALLED OR NOT	43
5.0	STARTING THE I-NET SERVICE	44
6.0	UNINSTALLING I-NET	45
7.0	APPENDIX A: Report Data Rendering and Generation	46
8.0	APPENDIX B: MY ORACLE SUPPORT	47

List of Tables

Table 1: Acronyms and Terminology	7
Table 2: Contents of Report Studio Zip File.....	9

List of Figures

Figure 1: Blank output of netstat command.....	11
Figure 2: Non-Blank Output of netstat command.....	11
Figure 3: Contents of the Reporting Studio Zip.....	12
Figure 4: Installation of clear-reports-server rpm	12
Figure 5: Giving permission to non-root user to start/stop/restart clear-reports-server	13
Figure 6: Restarting i-net server.	14
Figure 7: i-net Clear Reports home page	14
Figure 8: i-net Clear Reports Setup window.....	15
Figure 9: Pasting the UUID in the UUID text box.....	15
Figure 10: Product License and Webserver Settings	16
Figure 11: Entering the i-net Clear Report License	16
Figure 12: Changing port from 80 to 9000	17
Figure 13: i-net Clear Reports installation completed	17
Figure 14: Give permission to Clear Reports user	19

Figure 15: Click on the “Open Startpage” button	19
Figure 16: i-net Clear Reports Startpage	19
Figure 17: Click on Login.....	20
Figure 18: Start Page	20
Figure 19: Data Sources Card	20
Figure 20: Create new Data Source option	21
Figure 21: Create New Database details.....	21
Figure 22: New Data Sources added.....	21
Figure 23: Card browser on the header.....	22
Figure 24: Configuration Card.....	22
Figure 25: Welcome to Configuration Popup	22
Figure 26: Switch to Advanced View	23
Figure 27: Advanced View of Configuration page.....	23
Figure 28: Drive option.....	24
Figure 29: Add drive from file system.....	24
Figure 30: New Connection popup	25
Figure 31: Select Folder for add repository	25
Figure 32: Add drive from file system.....	26
Figure 33: Add Drive.....	26
Figure 34: Create Link.....	27
Figure 35: Create a link popup	27
Figure 36: Click Permissions.....	28
Figure 37: Set Permissions	28
Figure 38: Report Section.....	28
Figure 39: Customization Pop Up.....	29
Figure 40: Click Users and Group card	29
Figure 41: Users and Group Card Page	30
Figure 42: Create New User Pop-up	30
Figure 43: PAM authentication root setup.....	30
Figure 44: Permission of the root user.....	31
Figure 45: Verifying permissions	31
Figure 46: Store Card.....	32
Figure 47: Authentication tab on Store Page	32
Figure 48: Disabled Script Authentication.....	32
Figure 49: Script Authentication Page.....	33
Figure 50: Restart option	33
Figure 51: Re-login.....	34
Figure 52: Web Server card.....	34
Figure 53: Web Server pop-up.....	35
Figure 54: Select HTTPS.....	35
Figure 55: Updating the Web Server pop-up.....	35
Figure 56: Self Signed Certificate.....	35
Figure 57: Self Signed Certificate Form Details.....	36

Figure 58: Filled up Web Server Form	36
Figure 59: Configuration Card.....	37
Figure 60: Login button	37
Figure 61: Login pop-up.....	38
Figure 62: Edit System Authentication.....	38
Figure 63: System Authentication	38
Figure 64: Internal Webserver option	38
Figure 65: Login pop-up.....	39
Figure 66: EMS GUI	39
Figure 67: Open Reporting Studio from EMS GUI.....	40
Figure 68: Configured Reporting Studio	40
Figure 69: Access Denied Page	41
Figure 70: Back to Start Page	41
Figure 71: i-net Clear Reports	42
Figure 72: Checking if i-net is installed or not	43
Figure 73: Giving permission to non-root user to start/stop/restart clear-reports-server	44
Figure 74: Starting the i-net Service with root user	44
Figure 75: Engine Cache Timeout	46
Figure 76: Data Cache Timeout.....	46

What's New in This Guide

This section introduces the documentation updates for Release 47.0.0.2.0 in Oracle Communications EMS Reporting Studio Install/Upgrade Guide.

Release 47.0.0.2.0 – G58109-01, October 2026

- Updated the installation procedure for i-net Clear Reports 26.
 - o Updated the Reporting Studio distribution archive and i-net Clear Reports RPM details.
 - o Updated the E5MS Filter JAR and MySQL JDBC Connector JAR details.

1.0 INTRODUCTION

1.1 Purpose and Scope

The scope of this document is to describe the installation, upgrade and configuration of Reporting Studio release 26.4.269 to be used with release 47.0.0.2.0 of OCEEMS.

1.2 Acronyms and Terminology

TERM	DESCRIPTION
Ad Hoc Reporting	Creating reports on the fly without any predefined template.
Configuration	Managing i-net Clear Reports configurations. A configuration contains all options to configure i-net Clear Reports.
Data Source Configuration	Configuring the data sources to be used for report generation.
OCEEMS Reporting Studio	Term used for all the reporting features accessible from OCEEMS
Report Designer	An interface for designing and editing report templates files.
Repository	Directory containing existing reporting templates
Task Planner	Scheduling/Planning report templates to generate reports at desired time.
Template	i-net Clear Reports template (.rpt format) for creating report.

Table 1: Acronyms and Terminology

2.0 SOFTWARE REQUIREMENTS

Either of the following web browsers should be present on the OCEEMS client:

- Microsoft® Edge Version 125.0.2535.51 (Official build) (64-bit) or later
- Mozilla Firefox® Version 115.11.0 or later
- Google Chrome Version 125.0.6422.112 (Official Build) (64-bit) or later

The configuration of Reporting Studio for the release 47.0.0.2.0 has been tested on the browsers mentioned above. It is recommended to use them for optimal performance.

3.0 INSTALLATION/UPGRADE OF REPORTING STUDIO R47.0.0.2.0 (I-NET CLEAR REPORTS <version>)

Reporting Studio 47.0.0.2.0 is based on i-net Clear Reports version <version>.

3.1 Prerequisite

'netstat' command must be installed on the system.

1. Disk space requirement in /tmp

To run i-net Clear Reports, the size of '/tmp' directory should be greater than 1GB. This is a system requirement for i-net Clear reports and cannot be changed.

2. Contents of Reporting Studio zip file

The following items shall be available inside the Reporting Studio 47.0.0.2.0 zip.

S . N O .	ITEM	NAME	PURPOSE
1	i-net Clear Reports RPM	i-net Clear Reports RPM clear-reports-server-<version>.rpm The following names are acceptable: - clear-reports-server-<version>.rpm	Installation RPM for i-net Clear Reports
2	E5MS Filter Jar	E5msFilter-<version>.jar	Used for Reporting Studio functionality
3	NMS Server Classes Jar	NmsServerClasses.jar	Used for Reporting Studio functionality
4	MySQL JDBC Connector Jar	mysql_connector.jar	Used to create connection to EAGLE Element Management System's database
5	Authentication Plugin	authentication.script.zip	Used for Reporting Studio functionality

Table 2: Contents of Report Studio Zip File

The i-net Clear Reports installation RPM (item 1 in above table) shall be used for installation/upgrade of i-net Clear Reports. The rest of the items in the zip file (items 2, 3, 4 and 5 in the table above) shall be used after installation of i-net Clear Reports.

3. License key from i-net Clear reports

A valid license for i-net Clear Reports should be available on the system before proceeding with installation/upgrade

to Reporting Studio 26.4.269. In case the license for i-net Clear Reports is not available, contact My Oracle Support. Refer to [Appendix B](#) for instructions on accessing My Oracle Support.

3.2 Installation of Reporting Studio

Follow the instructions of the respective version that you are using:

- I. **clear-reports-server-<version>.rpm**

Follow the steps for clear-reports-server-<version>.rpm

The steps for installation of Reporting Studio for Release 47.0.0.2.0 are given below. **These steps should be performed by super user 'root'.**

1. Check for Port Availability

In the system, check whether the 9000 port is free or not. i-net Clear Reports run on port 9000.

Run the following command:

```
# netstat -tulpn|grep 9000
```

- a) If output of the above command is blank, as shown below, then skip step 2:

```
[root@e5ms69 bin]# netstat -tulpn|grep 9000
[root@e5ms69 bin]#
```

Figure 1: Blank output of netstat command

- b) If output of the above command is similar to the following, then move to the Step 2:
tcp6 0 0 :::9000 :::* LISTEN 17869/java

In the above output, the number “17869” is the PID of the process.

```
[root@e5ms69 inet17.1.146rpm]# netstat -tulpn|grep 9000
tcp6      0      0  :::9000      :::*          LISTEN    17869/java
[root@e5ms69 inet17.1.146rpm]#
```

Figure 2: Non-Blank Output of netstat command

2. Run the following command to end the process in the Step 1.b.
kill -9 <PID of the process at step 1.b>
e.g. kill -9 17869
3. Unzip the Reporting Studio zip file to the **reporting-studio** directory using the command given below:
unzip <reporting studio zip> -d reporting-studio

The versions of the following versions as follows:

iNet 26	reporting-iNet26-<version>.zip
----------------	---

4. Move to the new **reporting-studio** directory created in above step and verify the contents of reporting studio zip file by running the following command:

February 2026

```
# cd reporting-studio
# 11
```

5. Check all jars and scripts are available as per EMS and i-net release:

Note: mysql-connector-j-<version>.jar name will depend on the version of Reporting Studio. Please check the version and the name of the jar present in the zip as shown below before running the commands. Please only use the jar present in the respective version zip files.

```
[root@EMS6 i-Net]# unzip reporting-iNet26-47.0.0.2.0-470.2.1.zip
Archive:  reporting-iNet26-47.0.0.2.0-470.2.1.zip
  inflating: authentication.script.zip
  inflating: clear-reports-server-26.4.216.rpm
  inflating: NmsServerClasses.jar
  inflating: E5msFilter-iNet26-47.0.0.2.0-470.2.1.jar
  inflating: mysql-connector-j.jar
[root@EMS6 i-Net]#
```

Figure 3: Contents of the Reporting Studio Zip

6. Once you are inside the same **reporting-studio** directory created in the above steps, install the i-net Clear Reports RPM by running the following command:

```
# rpm -ivh clear-reports-server-<version>.rpm
```

```
[root@EMS6 i-Net]# rpm -ivh clear-reports-server-26.4.216.rpm
Verifying... ##### [100%]
Preparing... ##### [100%]
Updating / installing...
 1:clear-reports-server-26.4.216-1 ##### [100%]
Created symlink /etc/systemd/system/multi-user.target.wants/clear-reports.service →
/usr/lib/systemd/system/clear-reports.service.
.....
#####
#
#
#   Continue setup using the following URL in a browser:
#   http://localhost:9000/setup/83a8820a-fff8-4651-abb0-7c99ef8b959b
#
#####
[root@EMS6 i-Net]#
```

Figure 4: Installation of clear-reports-server rpm

7. Copy jars and plugin to same folder as done in below logs:

```
cp E5msFilter-iNet25-<version>.jar NmsServerClasses.jar /usr/share/i-net-clear-reports/lib/
cp mysql-connector-j-8.4.0.jar /usr/share/i-net-clear-reports/lib/driver/
cp authentication.script.zip /usr/share/i-net-clear-reports/plugins/
```

8. Run the following commands from the root user to ensure that the non-root user has the permission to restart/start/stop/status clear-reports-service. Assuming the admin username is emsadmuser, run the below command. If the User ID of adminuser name is different, replace emsadmuser with the admin username in the following commands.

```
echo 'emsadmuser ALL=(root) NOPASSWD: /sbin/service clear-reports restart' |  
sudo tee -a /etc/sudoers  
echo 'emsadmuser ALL=(root) NOPASSWD: /sbin/service clear-reports start' |  
sudo tee -a /etc/sudoers  
echo 'emsadmuser ALL=(root) NOPASSWD: /sbin/service clear-reports stop' |  
sudo tee -a /etc/sudoers  
echo 'emsadmuser ALL=(root) NOPASSWD: /sbin/service clear-reports status' |  
sudo tee -a /etc/sudoers
```

```
[root@EMS3 reporting]# echo 'emsadmuser ALL=(root) NOPASSWD: /sbin/service clear-reports restart' |  
sudo tee -a /etc/sudoers  
emsadmuser ALL=(root) NOPASSWD: /sbin/service clear-reports restart  
[root@EMS3 reporting]# echo 'emsadmuser ALL=(root) NOPASSWD: /sbin/service clear-reports start' |  
sudo tee -a /etc/sudoers  
emsadmuser ALL=(root) NOPASSWD: /sbin/service clear-reports start  
[root@EMS3 reporting]# echo 'emsadmuser ALL=(root) NOPASSWD: /sbin/service clear-reports stop' | sudo  
tee -a /etc/sudoers  
emsadmuser ALL=(root) NOPASSWD: /sbin/service clear-reports stop  
[root@EMS3 reporting]# echo 'emsadmuser ALL=(root) NOPASSWD: /sbin/service clear-reports status' |  
sudo tee -a /etc/sudoers  
emsadmuser ALL=(root) NOPASSWD: /sbin/service clear-reports status  
[root@EMS3 reporting]#
```

Figure 5: Giving permission to non-root user to start/stop/restart clear-reports-server

9. Move to the directory /Tekelec/webNMS/bin and run the script inetService.sh restart with the non-root user to restart the i-net service.

```
# cd /Tekelec/webNMS/bin  
# sh inetService.sh restart
```

```
[root@EMS3 reporting]# su - emsadmuser  
[emsadmuser@EMS3 ~]$  
[emsadmuser@EMS3 ~]$  
[emsadmuser@EMS3 ~]$ cd /Tekelec/webNMS/bin/  
[emsadmuser@EMS3 bin]$  
[emsadmuser@EMS3 bin]$ ./inetService.sh restart  
Redirecting to /bin/systemctl restart clear-reports.service  
[emsadmuser@EMS3 bin]$ ./inetService.sh status  
Redirecting to /bin/systemctl status clear-reports.service  
● clear-reports.service - Provides the creation and execution of *.rpt reports.  
   Loaded: loaded (/usr/lib/systemd/system/clear-reports.service; enabled; vendor preset: disabled)  
   Active: active (running) since Fri 2026-02-06 11:07:13 EST; 5s ago  
     Process: 280027 ExecStartPre=/bin/bash /usr/share/i-net-clear-reports/servicePreScript.sh (code=exited,  
status=0/SUCCESS)  
    Main PID: 280049 (java)  
       Tasks: 71 (limit: 22225)  
      Memory: 354.0M  
    CGroup: /system.slice/clear-reports.service  
            └─280049 /usr/share/i-net-clear-reports/runtime/bin/java -XX:+HeapDumpOnOutOfMemoryError -  
Djava.awt.headless=true -cp /usr/share/i-net-clear-reports/core/inetcore.jar com.inet.Start
```

February 2026

```

└─280073 /usr/share/i-net-clear-reports/runtime/bin/java -XX:+HeapDumpOnOutOfMemoryError -
Djava.awt.headless=true -Djava.class.path=/usr/share/i-net-clear-reports/core/inetcore.jar -Drestart.exitcode=100
-DAppDa>

Feb 06 11:07:13 EMS3 systemd[1]: Starting Provides the creation and execution of *.rpt reports....
Feb 06 11:07:13 EMS3 bash[280027]: Checking capabilities 'cap_net_bind_service' to enable system port range for
'/usr/share/i-net-clear-reports/runtime/bin/java'.
Feb 06 11:07:13 EMS3 bash[280027]: Capabilites to enable system port range will be set now!
Feb 06 11:07:13 EMS3 bash[280027]: Added some library paths for libjli.so to 'ld.so.conf'
Feb 06 11:07:13 EMS3 systemd[1]: Started Provides the creation and execution of *.rpt reports..
Feb 06 11:07:13 EMS3 java[280049]: Initializing persistence in folder /home/clearreports/.i-net
software/reporting_User_Default
Feb 06 11:07:13 EMS3 java[280049]: Possible redirection of stdout and stderr to a file cannot be detected. Add the
following command line parameters if you need the redirection: '--add-opens java.base/java.io=ALL-UNNAMED'
Feb 06 11:07:13 EMS3 java[280049]: Possible redirection of stdout and stderr to a file cannot be detected. Add the
following command line parameters if you need the redirection: '--add-opens java.base/java.io=ALL-UNNAMED'
Feb 06 11:07:14 EMS3 java[280073]: [Config,STATUS,2/6 11:07:14,#00001] Setting current configuration to:
User/Default
[emsadmuser@EMS3 bin]$

```

Figure 6: Restarting i-net server.

10. Go to a browser (preferably Chrome) and open the URL: `http://<IP Address of the Server>:9000`.

The following screen will open.

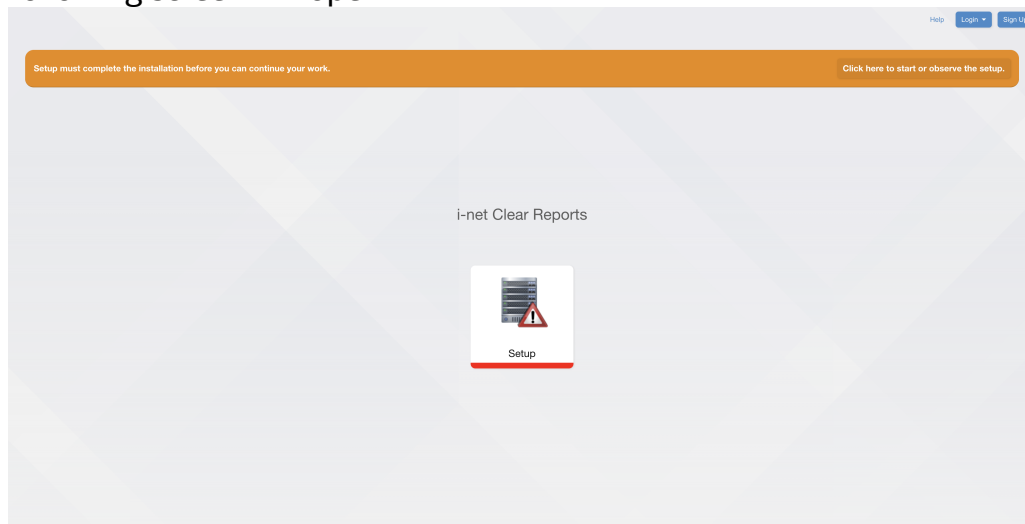



Figure 7: i-net Clear Reports home page

11. Click the  button to accept the cookies (at the bottom of the screen, this only comes the first time when you are opening this page). Click the **Setup** option on the i-net Clear Reports home page. It will open the i-net Clear Reports Setup window as shown below:

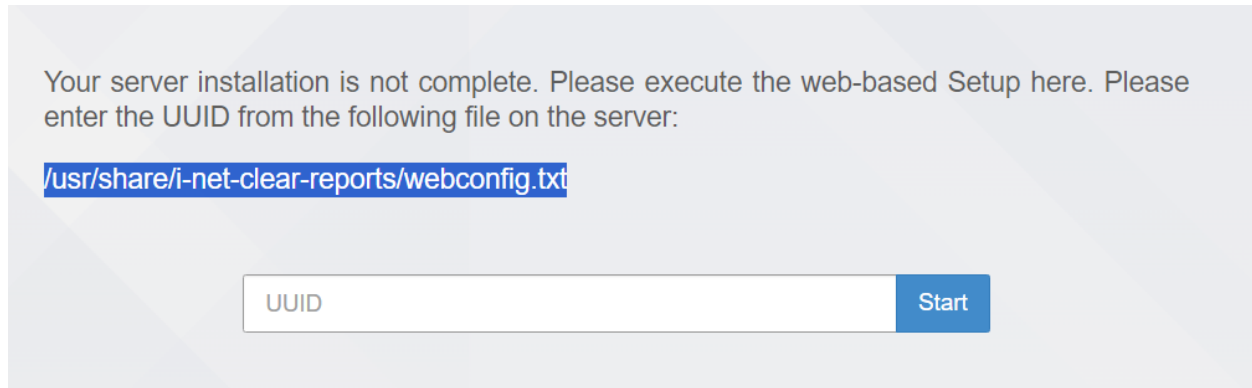


Figure 8: i-net Clear Reports Setup window

12. Log in with the non-root user and go to i-net installation directory. Run the following commands to view the contents of `webconfig.txt` file. Get UUID from `webconfig.txt`. Copy the UUID value. After copying the UUID, paste the same UUID in text box at the i-net Clear Reports Setup window in the browser.

```
[emsadmuser@EMS4 bin]$ cat /usr/share/i-net-clear-reports/webconfig.txt
PROTOCOL http
ADDRESS localhost
PORT 9000
URL http://localhost:9000
UUID 15cc3eb0-e8cb-43d3-8877-96db2d146c60
```

13. Click **Start** as shown in the following screenshot after pasting the UUID.

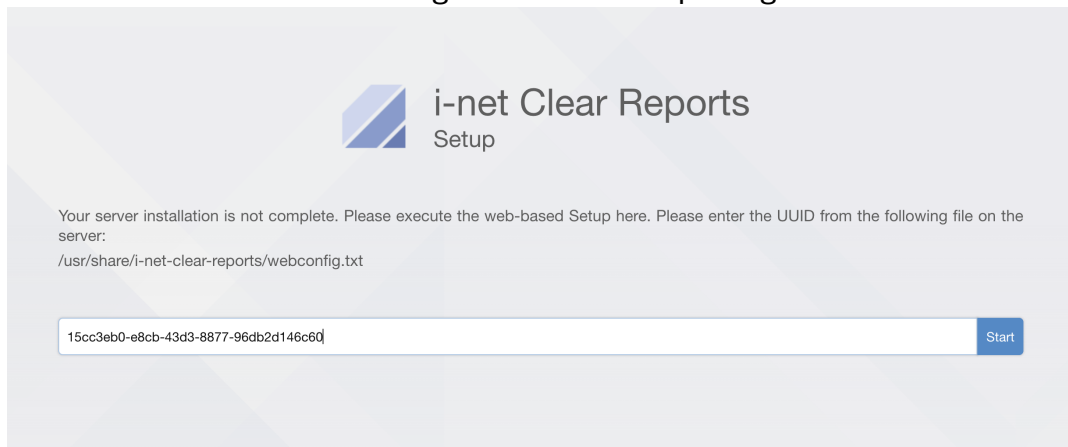


Figure 9: Pasting the UUID in the UUID text box

14. On clicking **Start** in the previous step, it will continue with the setup. Then click on the **“Modify settings”**. Fill in the **Product License** and **Webserver Settings** as follows:
 - Click the edit button . Fill in the License details in the popup.

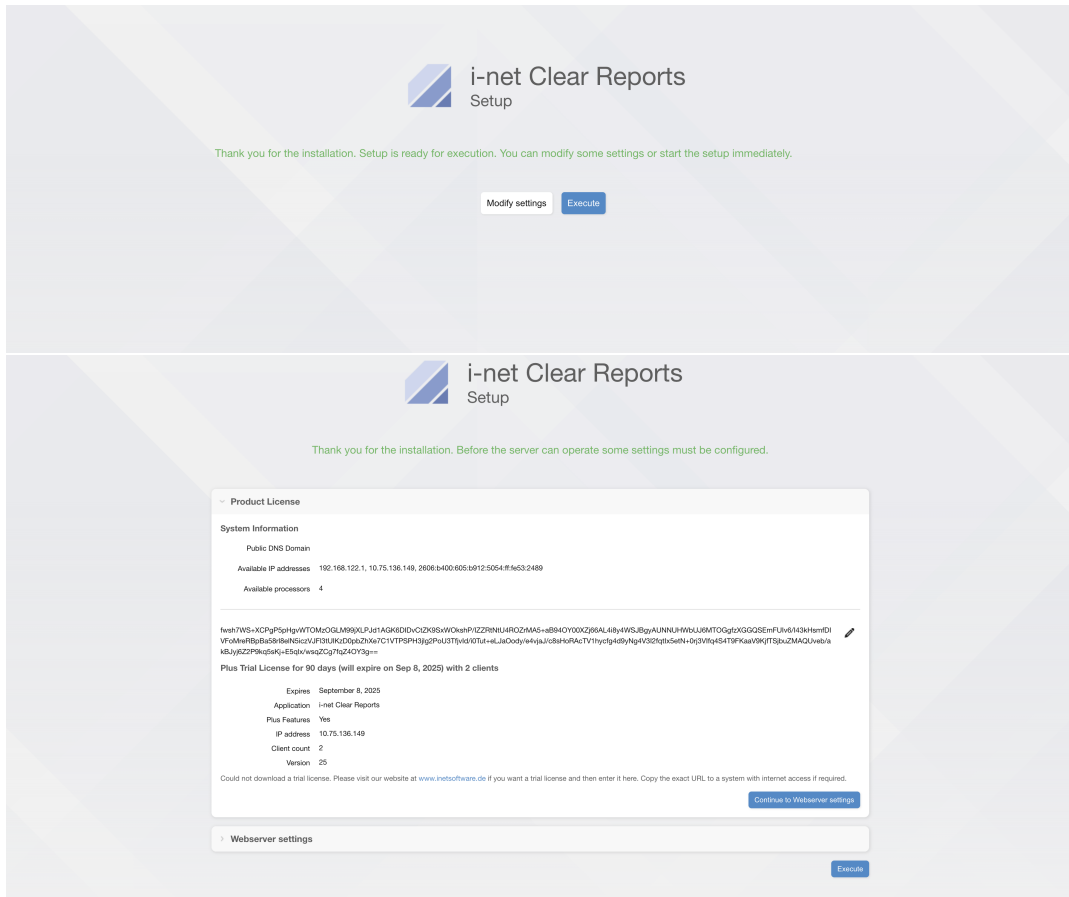


Figure 10: Product License and Webserver Settings

15. Enter the i-net Clear Reports <version> Product License, by clicking **Edit**:

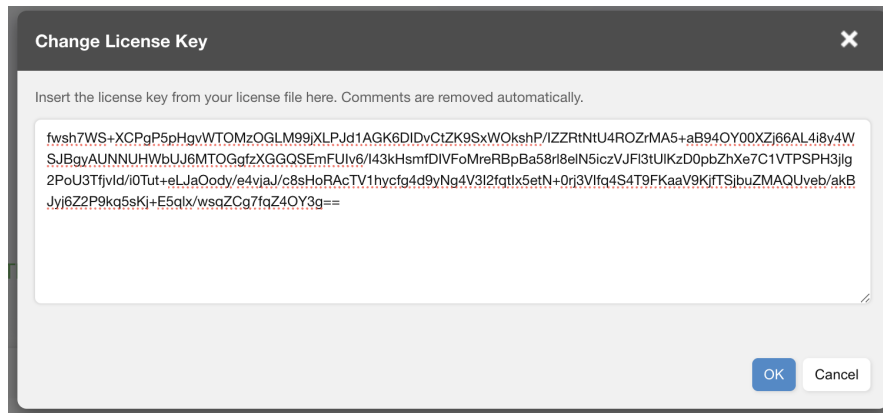


Figure 11: Entering the i-net Clear Report License

Click **OK** after entering the License.

16. Click **Continue to Webserver Settings**.

17. Open **Webserver Settings** and change the port (using the edit button) from 80 to 9000 and update the Base URL with `http://<ip_of_the_EMS_server>:9000`, as follows:

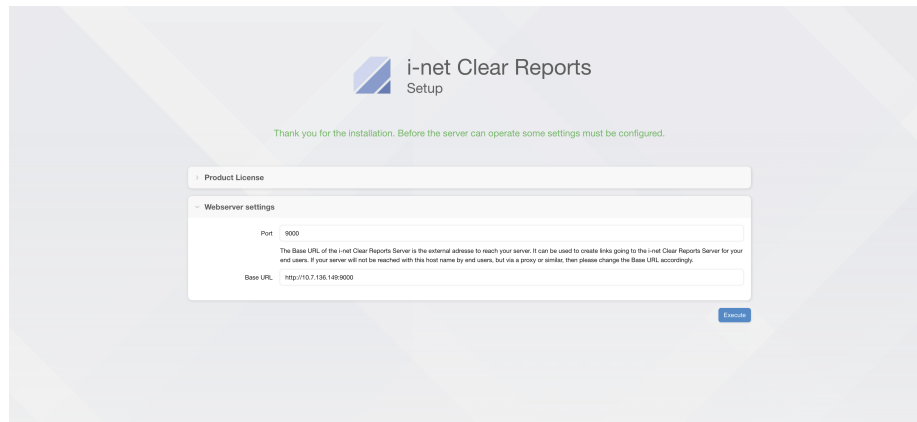


Figure 12: Changing port from 80 to 9000

Click the “Execute” button as shown in above screenshot, after changing the Port and Base URL.

18. After clicking **Execute** in the previous step, the i-net Clear Reports installation will be completed as shown below:

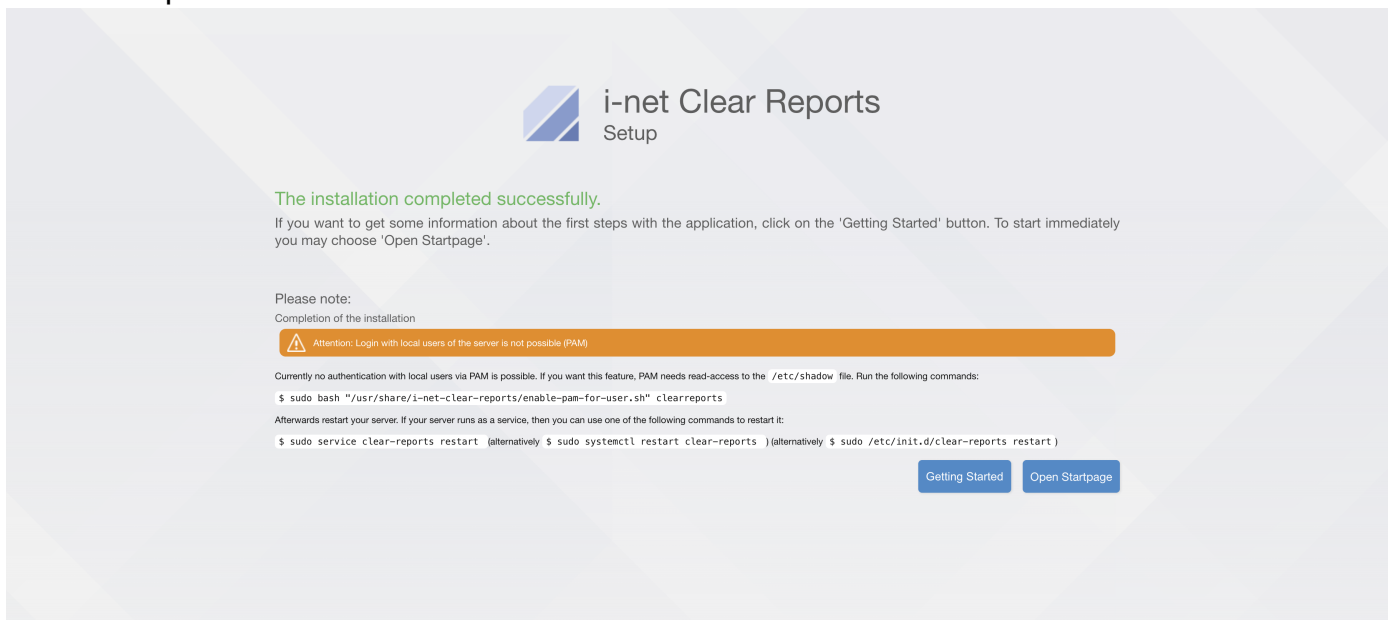


Figure 13: i-net Clear Reports installation completed

3.3 Configuration of i-net Clear Reports

Configuration for clear-reports-server-<version>.rpm

1. After the successful installation of i-net Clear Reports, assuming the admin username is emsadmuser, run the following command. UserID of adminuser name is different. Replace emsadmuser with the admin username in the following commands.

- a. Run below commands on the EMS server CLI using the root user:
sh /usr/share/i-net-clear-reports/enable-pam-for-user.sh clearreports
su - emsadmuser
cd /Tekelec/WebNMS/bin/
sh inetService.sh restart
sh inetService.sh status

```
[root@EMS3 reporting]# sh /usr/share/i-net-clear-reports/enable-pam-for-user.sh clearreports
#####
#####
#
#   To allow PAM authentication against the local users of your system, our product needs read access to the
#   '/etc/shadow' file. This script will modify the '/etc/shadow' accordingly (add read access for group 'root'
and
#   add the DAEMON_USER (an argument you will give the script) to the group 'root' of '/etc/shadow')
#
#   ATTENTION: Excuting this is script imposes a potential security risk to security hardened systems.
#####
#####

Are you 100% sure that you want to grant 'clearreports' read access to '/etc/shadow' using the group 'root'?
Please type 'yes' if you are sure: yes
Executing now.

The '/etc/shadow' file has (gained) read permissions for the group 'root'. This will be needed for proper PAM
authentication.
Adding 'clearreports' to group: root
[root@EMS3 reporting]# su - emsadmuser
[emsadmuser@EMS3 ~]$
[emsadmuser@EMS3 ~]$ cd /Tekelec/WebNMS/bin/
[emsadmuser@EMS3 bin]$
[emsadmuser@EMS3 bin]$ ./inetService.sh restartt
[emsadmuser@EMS3 bin]$ ./inetService.sh restart
Redirecting to /bin/systemctl restart clear-reports.service
[emsadmuser@EMS3 bin]$ ./inetService.sh status
Redirecting to /bin/systemctl status clear-reports.service
• clear-reports.service - Provides the creation and execution of *.rpt reports.
   Loaded: loaded (/usr/lib/systemd/system/clear-reports.service; enabled; vendor preset: disabled)
   Active: active (running) since Fri 2026-02-06 11:20:51 EST; 4s ago
   Process: 280483 ExecStartPre=/bin/bash /usr/share/i-net-clear-reports/servicePreScript.sh (code=exited,
status=0/SUCCESS)
   Main PID: 280507 (java)
     Tasks: 63 (limit: 22225)
    Memory: 249.6M
     CGroup: /system.slice/clear-reports.service
             └─280507 /usr/share/i-net-clear-reports/runtime/bin/java -XX:+HeapDumpOnOutOfMemoryError -
Djava.awt.headless=true -cp /usr/share/i-net-clear-reports/core/inetcore.jar com.inet.Start
```

```

└─280532 /usr/share/i-net-clear-reports/runtime/bin/java -XX:+HeapDumpOnOutOfMemoryError -
Djava.awt.headless=true -Djava.class.path=/usr/share/i-net-clear-reports/core/inetcore.jar -Drestart.exitcode=100
-DAppDa>

Feb 06 11:20:51 EMS3 systemd[1]: Starting Provides the creation and execution of *.rpt reports....
Feb 06 11:20:51 EMS3 bash[280483]: Checking capabilities 'cap_net_bind_service' to enable system port range for
'/usr/share/i-net-clear-reports/runtime/bin/java'.
Feb 06 11:20:51 EMS3 bash[280483]: Capabilities to enable system port range will be set now!
Feb 06 11:20:51 EMS3 bash[280483]: Added some library paths for libjli.so to 'ld.so.conf'
Feb 06 11:20:51 EMS3 systemd[1]: Started Provides the creation and execution of *.rpt reports..
Feb 06 11:20:52 EMS3 java[280507]: Initializing persistence in folder /home/clearreports/.i-net
software/reporting_User_Default
Feb 06 11:20:52 EMS3 java[280507]: Possible redirection of stdout and stderr to a file cannot be detected. Add the
following command line parameters if you need the redirection: '--add-opens java.base/java.io=ALL-UNNAMED'
[emsadmuser@EMS3 bin]$

```

Figure 14: Give permission to Clear Reports user

- b. Click **Open Startpage** to open the i-net Clear Reports Startpage.

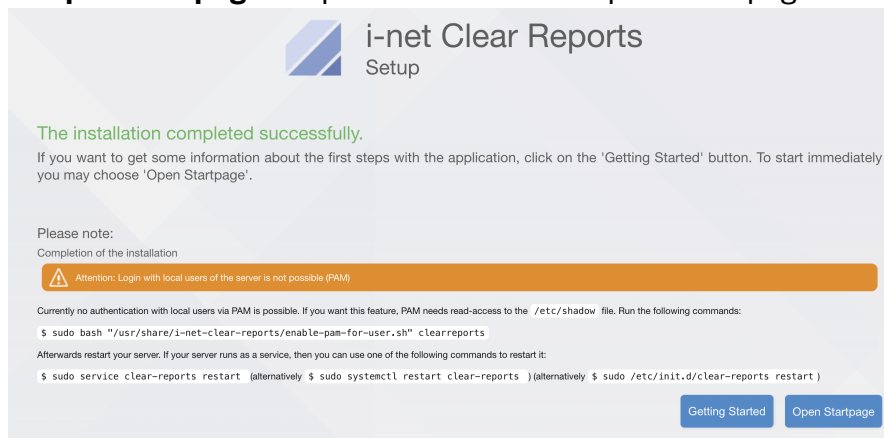


Figure 15: Click on the “Open Startpage” button

On clicking **Open Startpage** in the previous step, the following window will appear:

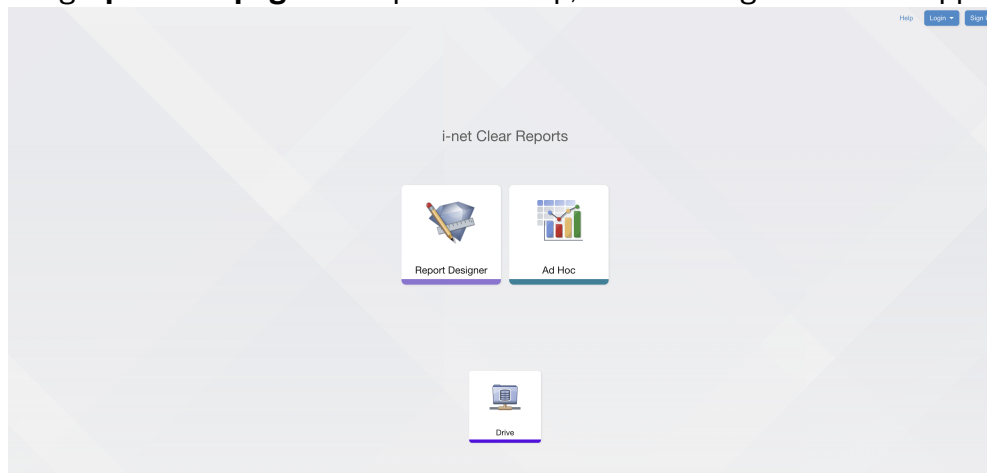


Figure 16: i-net Clear Reports Startpage

- Click **Login** and then enter the non root user username/password as displayed in the following screenshot.

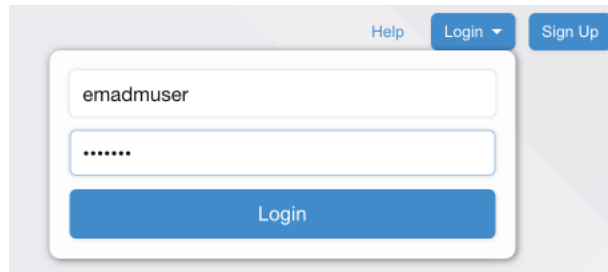


Figure 17: Click on Login

- On Login, we get the following page.

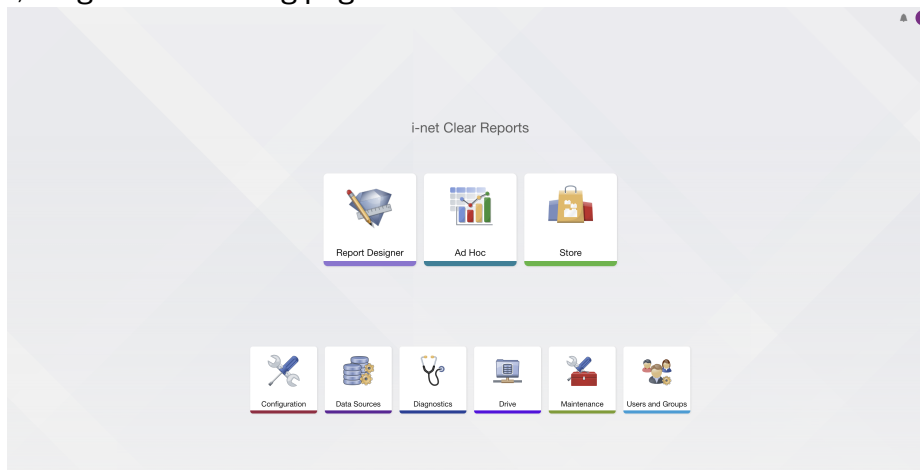


Figure 18: Start Page

- Click the **Data Sources** Card.

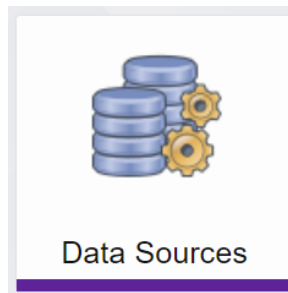


Figure 19: Data Sources Card

- The following page will open. Click **Add Data Source** on the header and from the drop-down, select the **Create new Data Source** option.

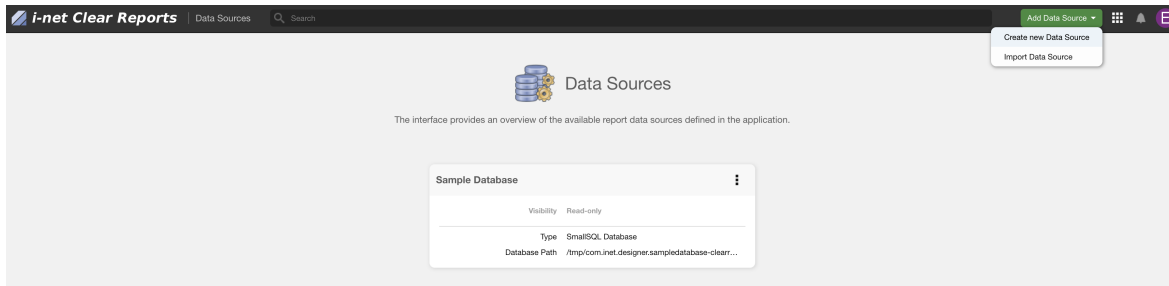


Figure 20: Create new Data Source option

6. The following pop-up will appear. Enter the following details:

The screenshot shows the 'Create Data Source - e5msdb' dialog box. The 'Basic Settings' tab is active, showing the following fields: Title (e5msdb), Database Type (MySQL), User (root), Password (masked with dots), Host (localhost), and Database (WebNmsDB). At the bottom right, there are 'Save', 'Validate', and 'Cancel' buttons. A 'Help' link is located at the bottom left.

Figure 21: Create New Database details

- a. Click **Validate**.
- b. Click **Save**.

The following screen will appear on the Data Sources page.

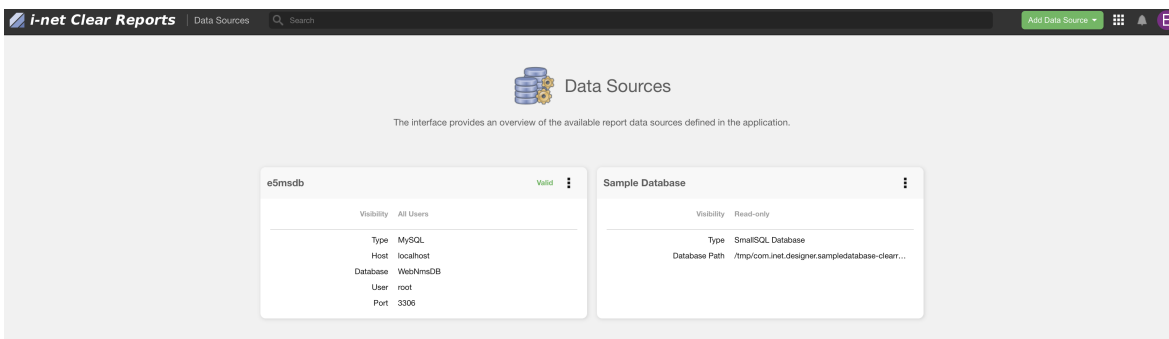


Figure 22: New Data Sources added

7. Click **Card Browser**  on the header.




Figure 23: Card browser on the header

8. Click the **Configuration Card** as shown below.

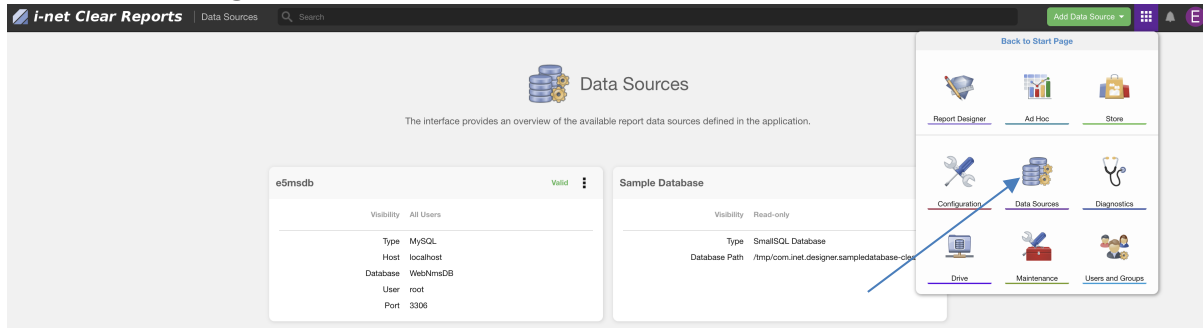


Figure 24: Configuration Card

On getting the below popup, click “Close welcome dialog”

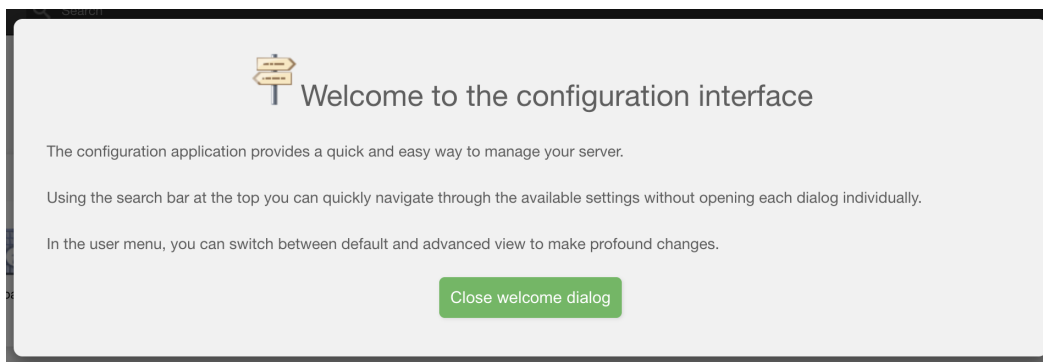


Figure 25: Welcome to Configuration Popup

9. In the following page, click **User(“E”)** on the right corner on the header and select the **Switch to Advanced View** option.

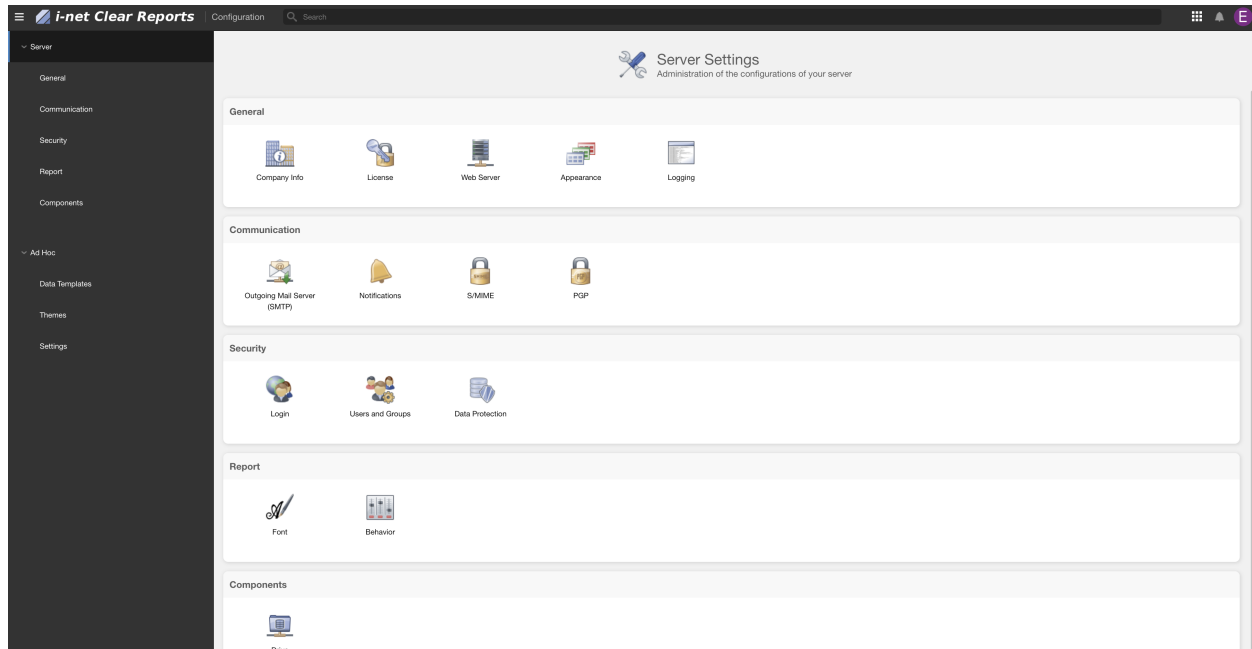


Figure 26: Switch to Advanced View

The Advanced View of Configuration Page will be as follows:

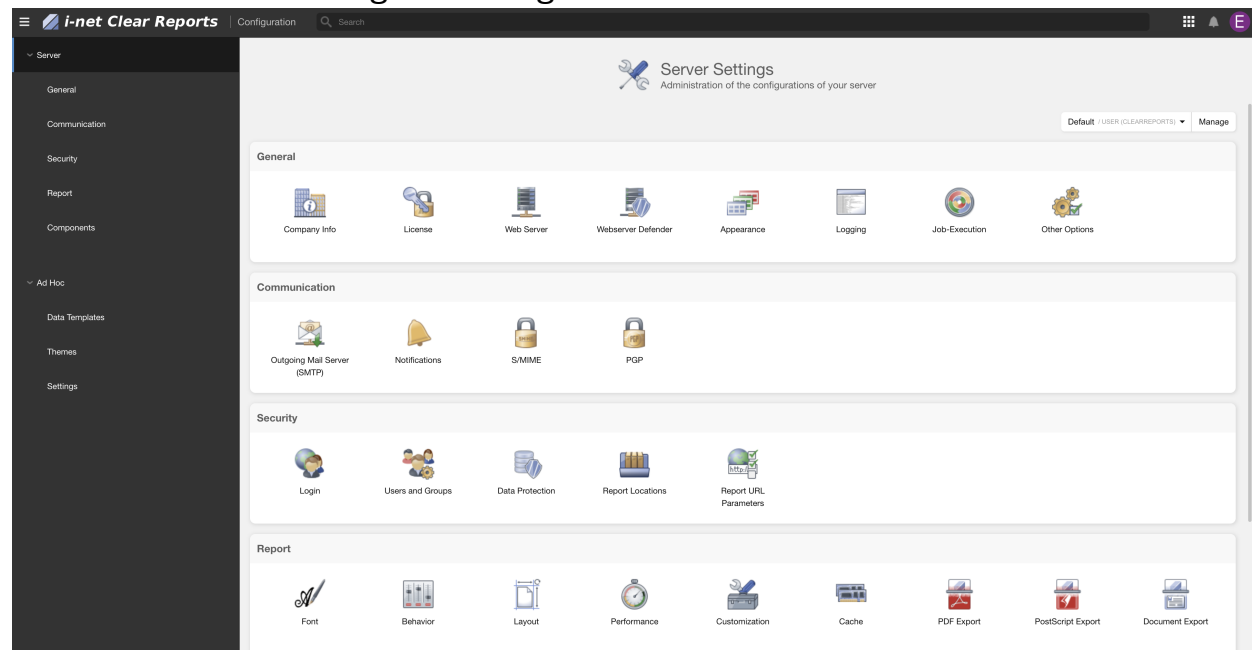


Figure 27: Advanced View of Configuration page

- Open the Home page of inetClearReports again. i.e <http://<IP of the EMS Server>:9000>. Click on the Drive Option. The following page will open.

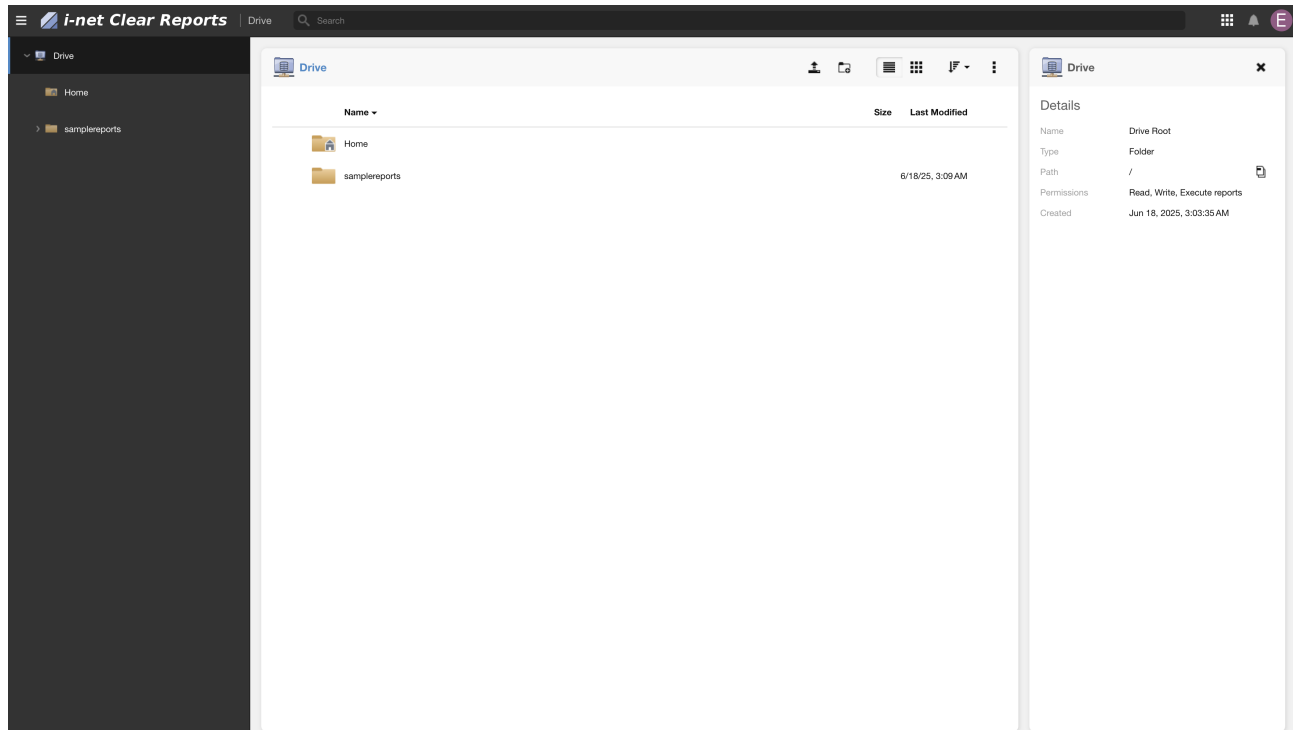



Figure 28: Drive option

11. Click on  **MANAGE CONNECTIONS** (“**Manage Connections**” Button at the bottom left of the screen). The following pop-up will appear. Click “**New connection**”  and select the “**Server file system**” option.

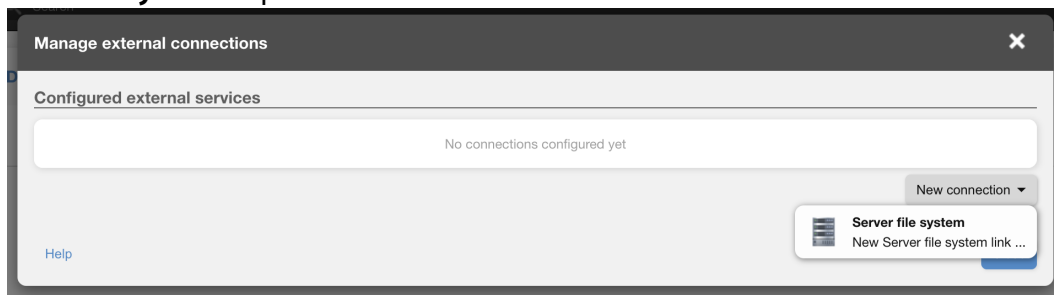


Figure 29: Add drive from file system

12. The following popup will appear.

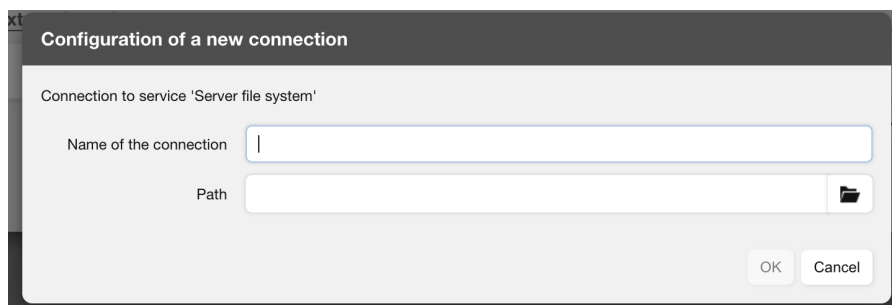


Figure 30: New Connection popup

13. Run the following command from the EMS server CLI from the root user. Assuming the admin username is emsamuser, run the below command. UserID of adminuser name is different. Replace emsamuser with the admin username in the following commands.

```
usermod -a -G emsadm clearreports  
su - emsamuser  
/Tekelec/WebNMS/bin/inetService.sh restart
```

Output:

```
[root@EMS3 reporting]# usermod -a -G emsadm clearreports  
[root@EMS3 reporting]# su - emsamuser  
[emsadmuser@EMS3 ~]$ /Tekelec/WebNMS/bin/inetService.sh restart  
Redirecting to /bin/systemctl restart clear-reports.service  
[emsadmuser@EMS3 ~]$
```

14. Click the **Folder** icon on the Connection Popup .
15. In the Selected Path field, enter /Tekelec/webNMS/reportingStudio/ as displayed below:

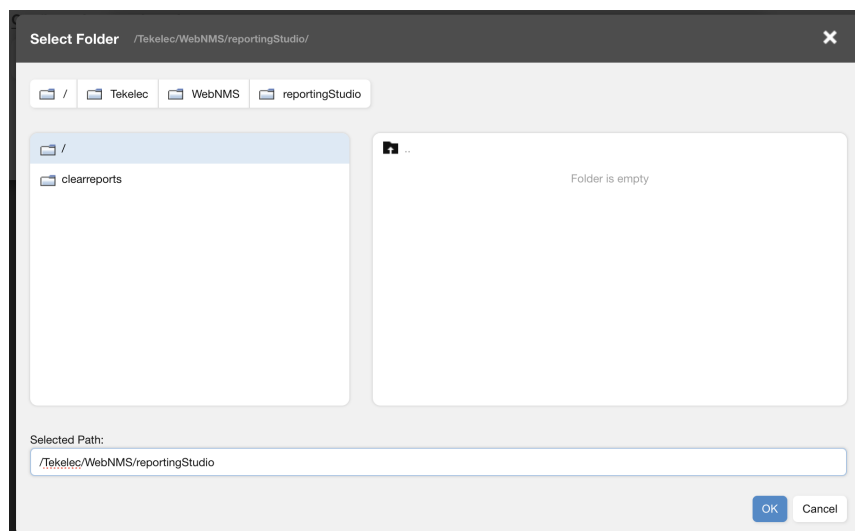


Figure 31: Select Folder for add repository

Click **OK**.

16. Fill in the name of the connection as “reportingStudioDrive”. The popup will appear like the following. Click **OK**.

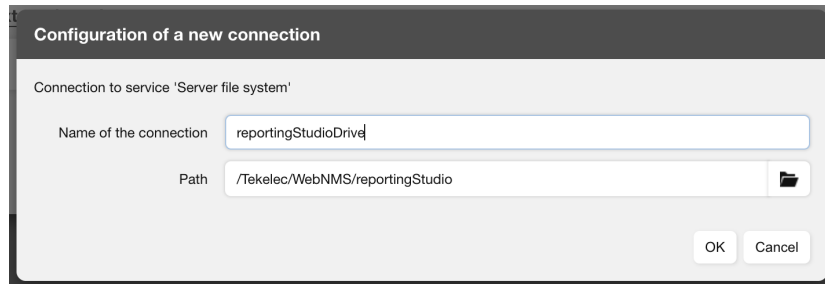


Figure 32: Add drive from file system

17. The **Manage external connections** pop-up will appear. Click on **Close**. Make sure that the Drive Page looks like the image below. It must have the newly created “reportingStudioDrive” section in the left panel and on Clicking it will show as the image below.

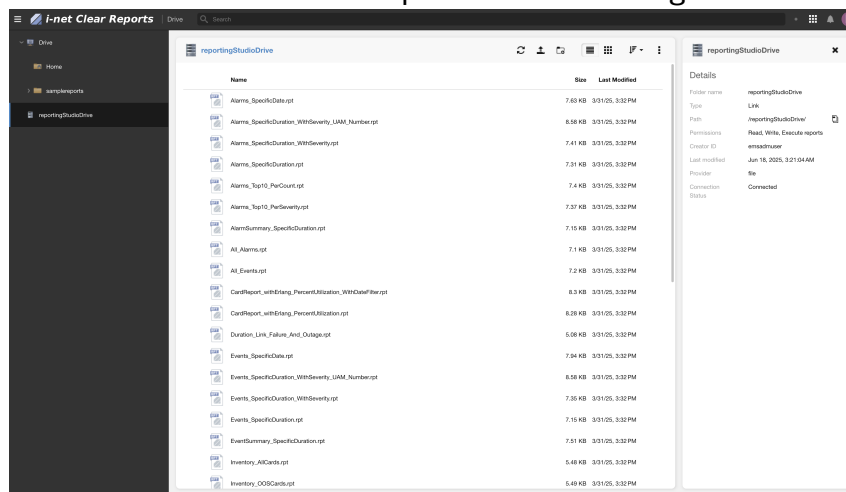


Figure 33: Add Drive

18. Open the “samplereports” section as seen in the left bar. Click on the three dots on the right in the file browser and click on “Create Link”.

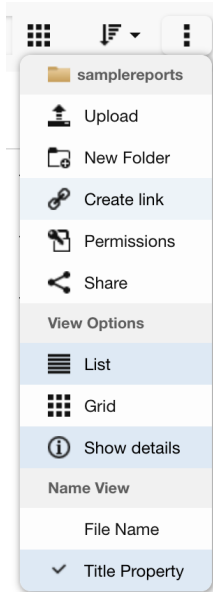


Figure 34: Create Link

19. The Create Link pop-up will open. Select the “reportingStudioDrive” that was created in step 17 and then add the name of the link as you like. Here we will name it “reportingStudioDriveLink”.

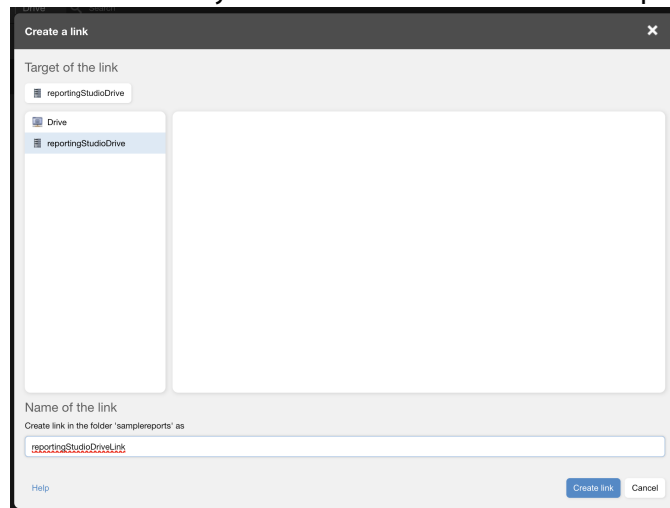


Figure 35: Create a link popup

20. Click the Create Link button to create the link.
21. Click the Checkbox beside the “reportingStudioDriveLink”, then click the three dots on the right. Click the permissions option.

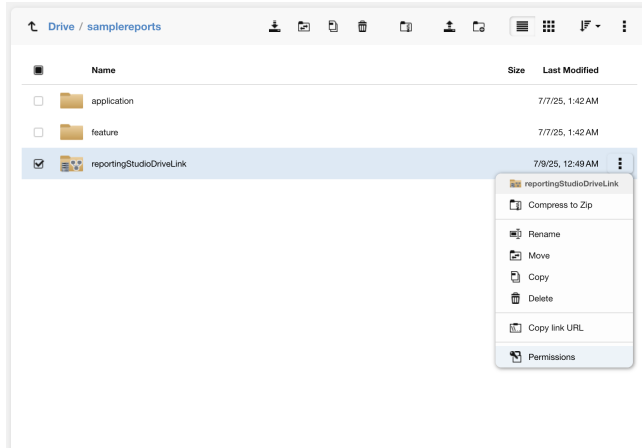


Figure 36: Click Permissions

22. Set the permissions as shown in the following screenshot. Click “Apply” and “Save”.

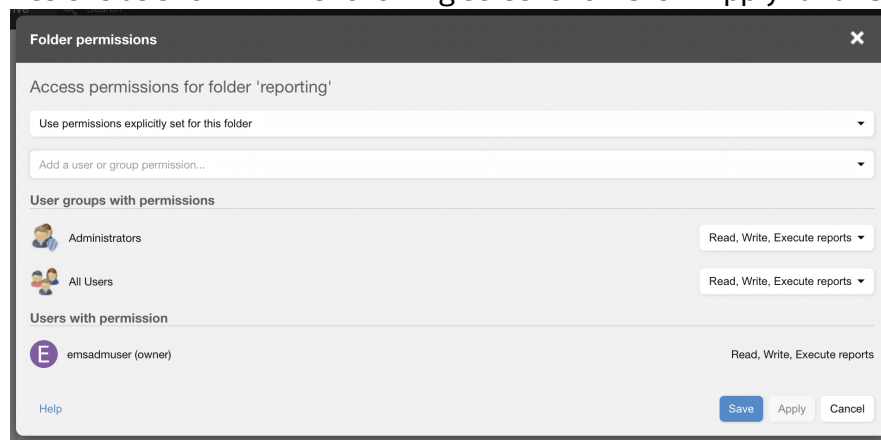


Figure 37: Set Permissions

23. Go to the Home Page (<http://<IP address of EMS Server>:9000>). Click the **Configuration** card. On the **Advanced Configuration** page, under the **Report Section**, click **Customization** card.

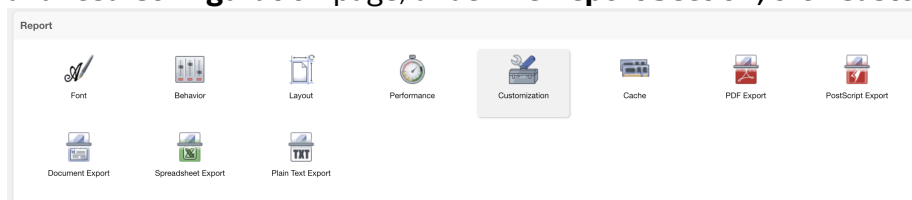


Figure 38: Report Section

24. The following pop-up will appear. Click **Add a Servlet Filter**. Enter **com.tekelec.e5ms.filter.E5msFilter** in the **Servlet Filter** field. Click the ✓ icon.

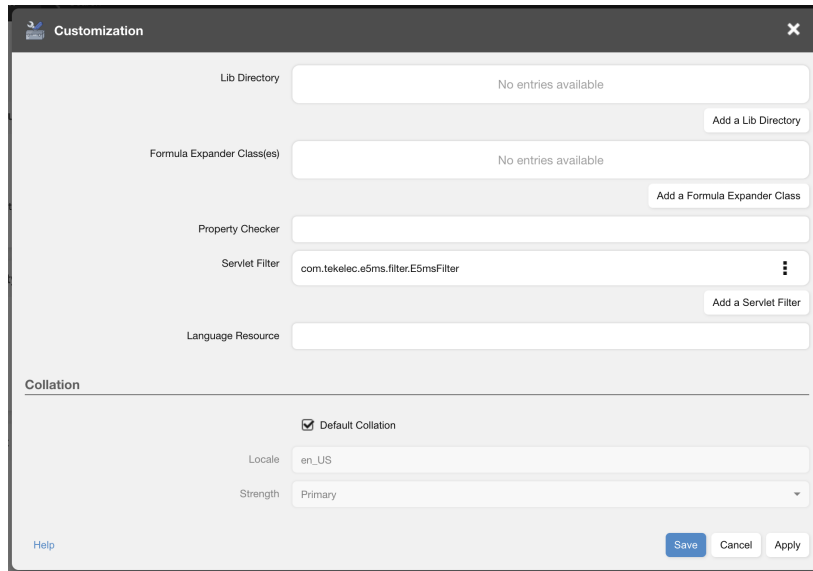


Figure 39: Customization Pop Up

Click **Apply** and then **Save**.

25. Click the **Card Drawer** button on the top right of the header and click the **Users and Groups** card.

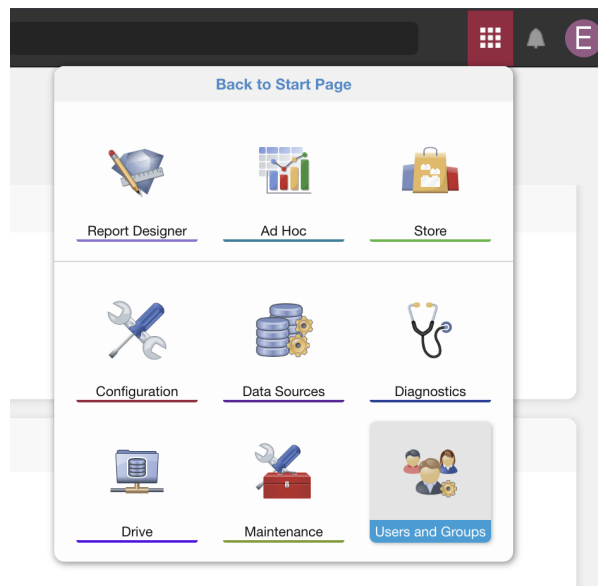


Figure 40: Click Users and Group card

The following screen will appear.

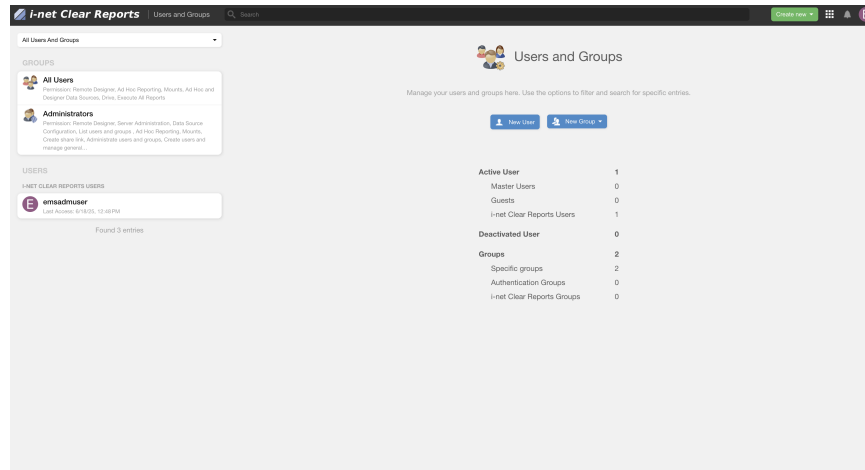


Figure 41: Users and Group Card Page

26. Click **New User** and navigate to the **Logins** tab.

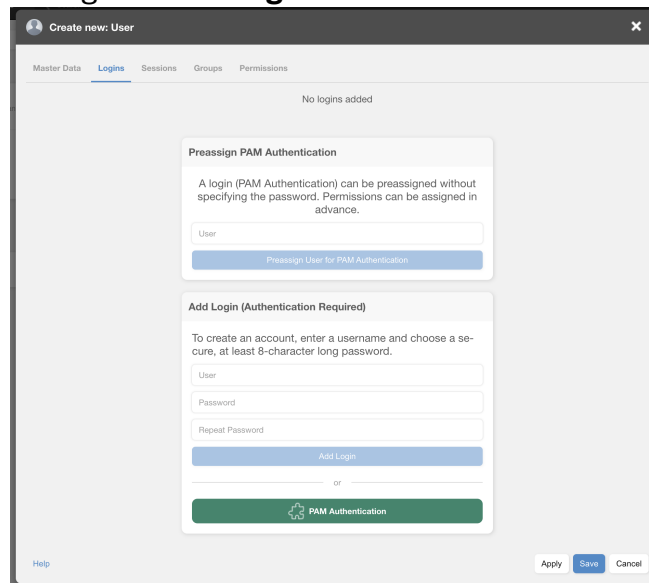


Figure 42: Create New User Pop-up

- Enter "root" in the User field under Preassign PAM Authentication.
- Click **Preassign User for PAM Authentication**.

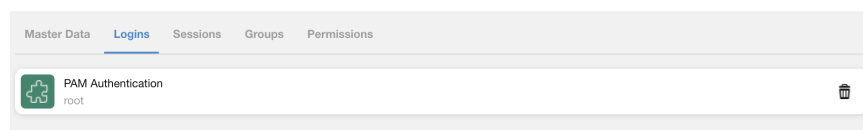


Figure 43: PAM authentication root setup

27. Click the **Permissions** tab and assign all the permissions as displayed below. Click **Apply** and then **Save**.

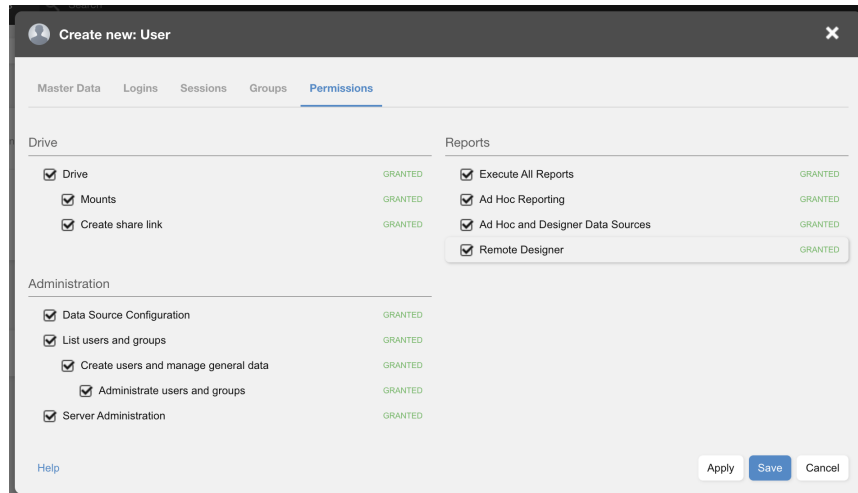


Figure 44: Permission of the root user

In this step if the user created and the permission is not present as shown in the below screenshot then please logout and restart the browser. Login using the same non-root user that was used in step 2 and continue the process by repeating from step 20.

28. Verify the Permissions as follows:

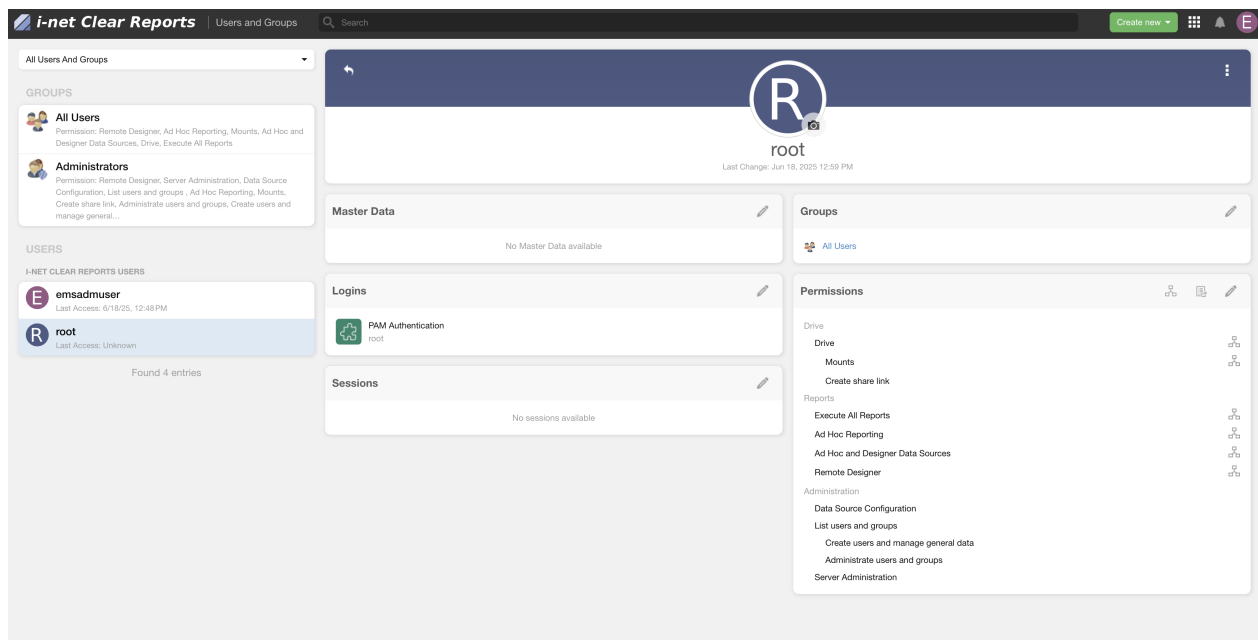


Figure 45: Verifying permissions

29. Click **Cards Browser**. Select the **Store** card.

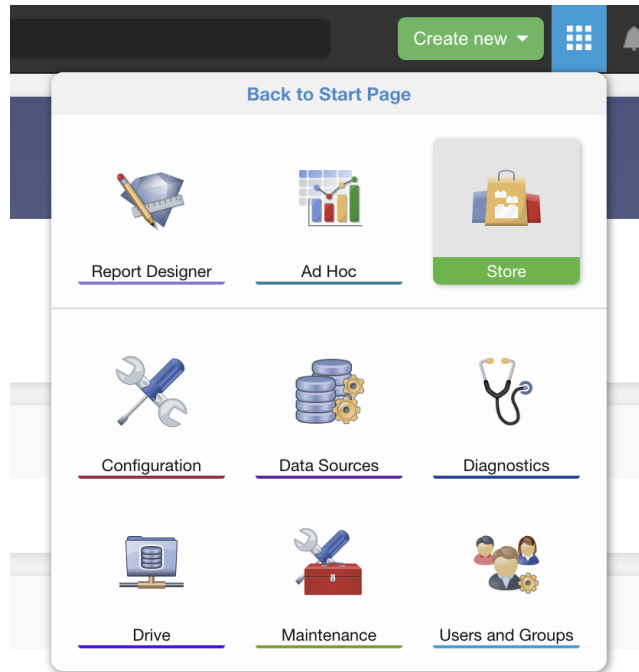


Figure 46: Store Card

30. The following page will appear. Select the **Authentication** tab.

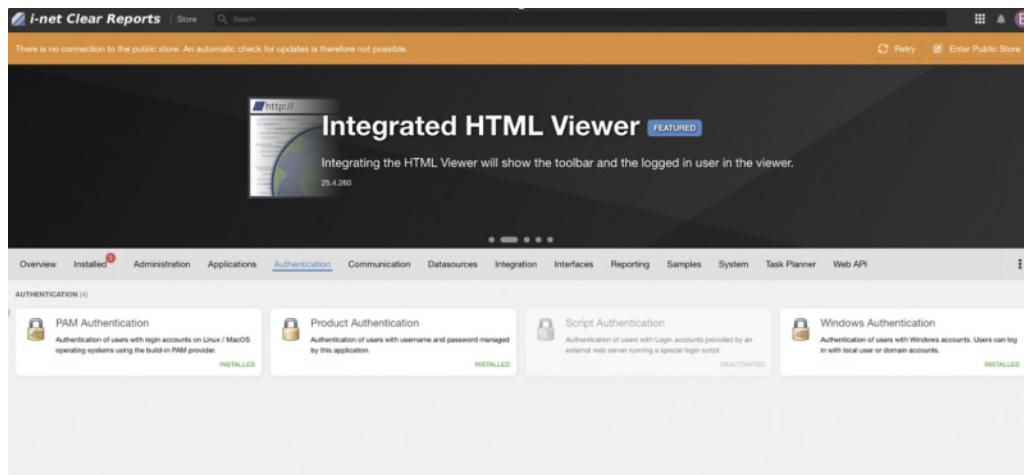


Figure 47: Authentication tab on Store Page

31. Click the grayed-out **Script Authentication** card.

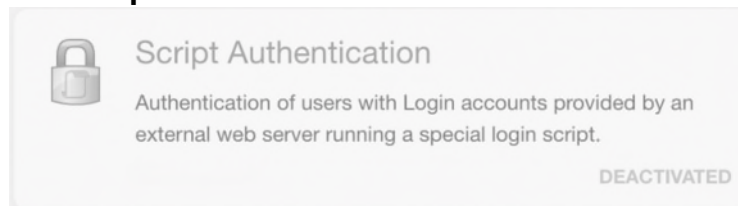


Figure 48: Disabled Script Authentication

32. Click **Activate**.

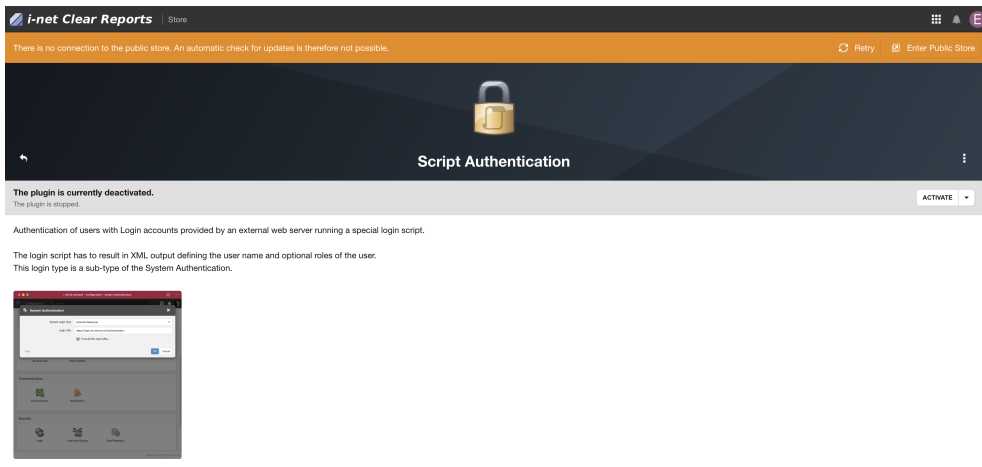


Figure 49: Script Authentication Page

33. After script authentication, the following page will be updated to provide the restart option, click on it as follows:

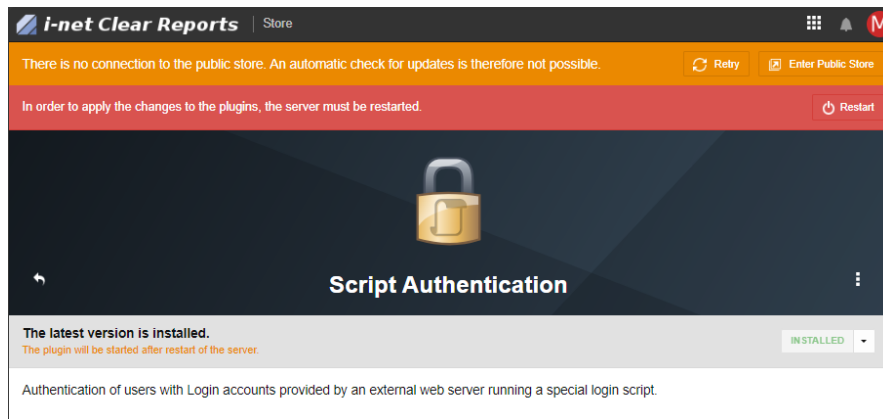


Figure 50: Restart option

34. If the browser asks to re-login as shown below, then close the browser tab and log in as non-root user again.

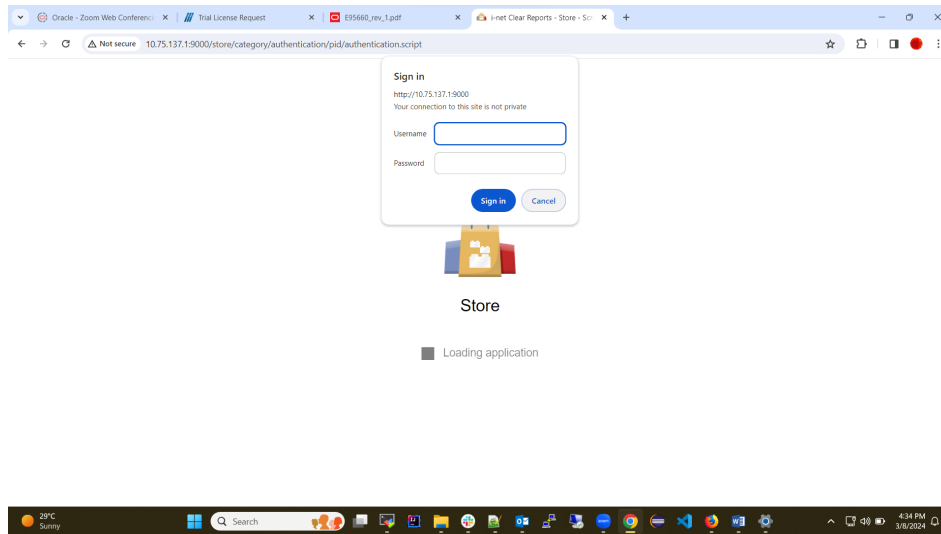


Figure 51: Re-login

- a. Type the URL: `http://<IP address of the EMS Server>:9000/`
- b. Log in as non root user with your password.

35. From the **Advanced Configuration View**, under the **General Section**, click the **Web Server** card.

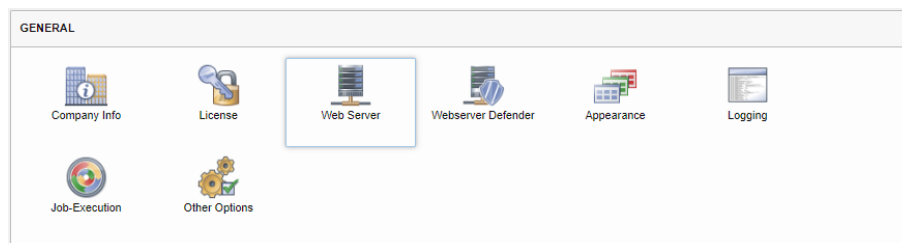


Figure 52: Web Server card

The following pop-up will appear:

The 'Web Server' pop-up window is divided into four main sections:

- Connections:** Includes a 'Type' dropdown set to 'HTTP', a 'Bind IP-Address' field with 'Optional: IP Address or Hostname', a 'Context' field with '/', an 'HTTP Port' field with '9000', and an 'External visible URL' field with 'http://10.75.136.149:9000'.
- Performance:** Includes 'Max Concurrent Requests' (500), 'Max HTTP Requests' (250), 'Max Heap Memory' (Current value approx. 800 MB), 'Server Language' (en), 'Server Country' (US), and 'Other VM Arguments'.
- Server Restart:** Contains a note about restarting the server and a 'Server Restart' button.
- Security:** Includes a note about the 'SameSite' setting, a 'Cookie SameSite' dropdown set to 'Relaxed', a 'Frame Embedding' dropdown set to 'Always allowed', and an 'Allowed Domains' field.

At the bottom, there are 'Help', 'Save', 'Cancel', and 'Apply' buttons.

Figure 53: Web Server pop-up

36. In the **Type** field, select the **HTTPS** option from the drop-down.

A close-up of the 'Type' dropdown menu. The 'Type' label is on the left. The dropdown is open, showing three options: 'HTTP', 'HTTP and HTTPS', and 'HTTPS'. The 'HTTPS' option is highlighted in yellow.

Figure 54: Select HTTPS

37. Update the PORT section as follows:

The 'Web Server' pop-up window is shown with the following configuration for the 'PORT' section:

- Type:** HTTPS
- Bind IP-Address:** Optional: IP Adresse or Hostname
- Context:** /
- HTTPS Port:** 9000
- External visible URL:** http://10.75.136.149:9000

Figure 55: Updating the Web Server pop-up

38. Select the **Create self signed HTTPS certificate** option.

A button with the text 'Create self signed HTTPS certificate'.

Figure 56: Self Signed Certificate

39. Fill the certificate form as follows:

Organization: <Use Organization Name>
Location: <use Organization location>
Country Code: <use Organization country>
FQDN: <use EMS server IP>

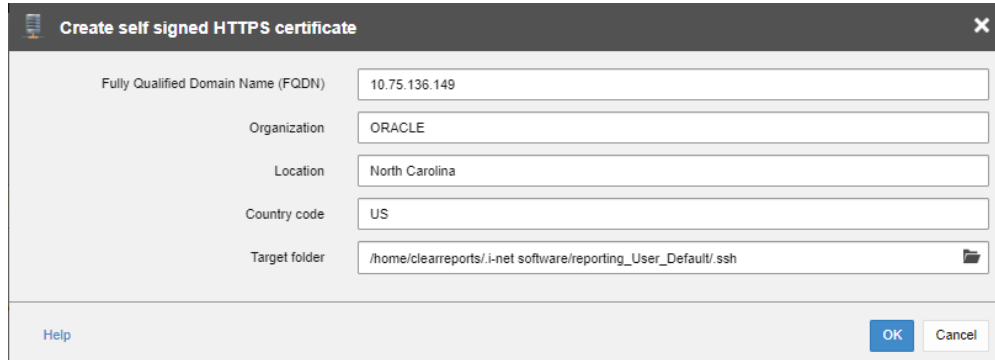


Figure 57: Self Signed Certificate Form Details

Click **OK**.

40. The Web Server form will be as follows.

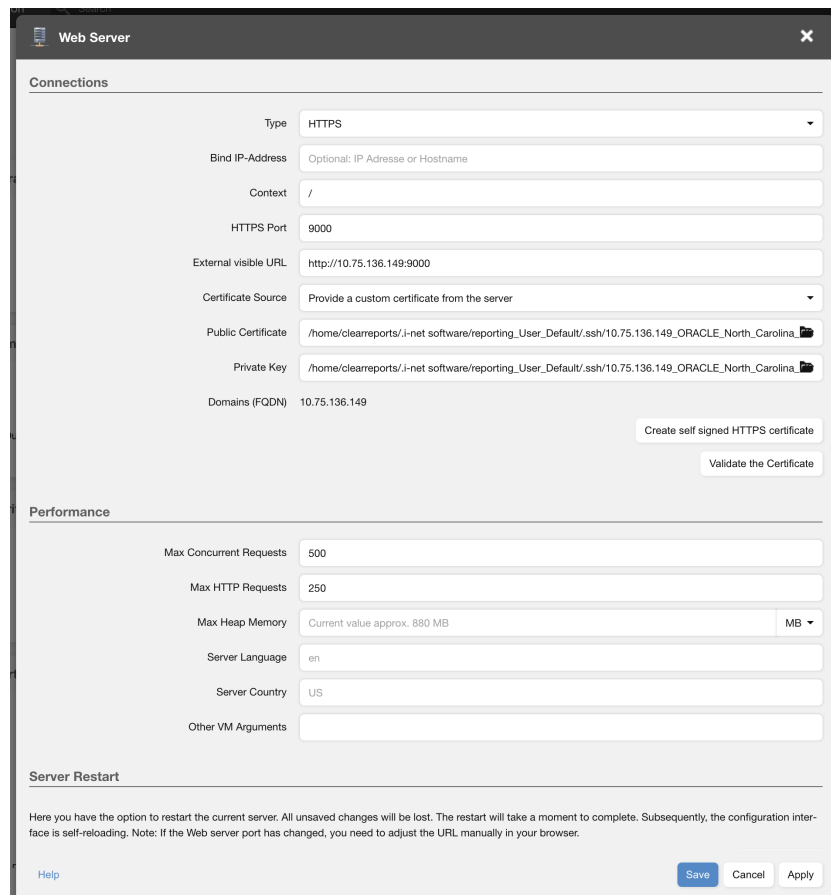


Figure 58: Filled up Web Server Form

41. Click **Apply**, and then **Restart Now**.
42. At this point, the UI will freeze while loading.
43. Change the URL by adding https to it, instead of http. The page will load (If it is logged out then login using the credentials).
44. Click **Card Browser** and click the **Configuration** card.

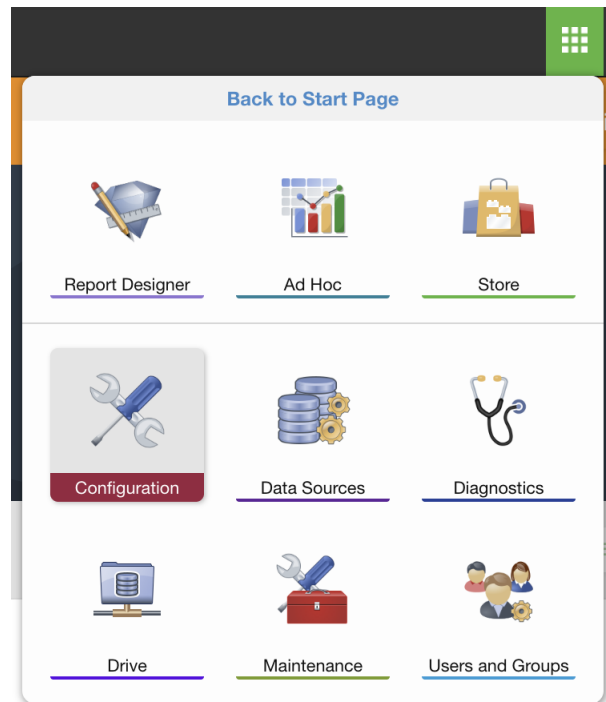


Figure 59: Configuration Card

45. Under the **Security** section, click **Login** . The following pop-up will appear.




Figure 60: Login button

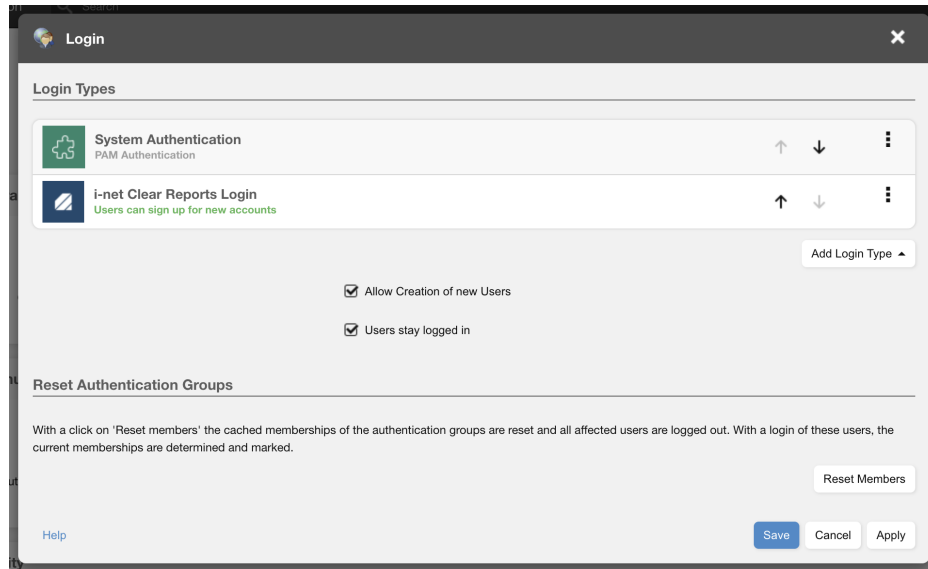


Figure 61: Login pop-up

46. Click the **Three Dot** menu beside the System Authentication option and select **Edit**.



Figure 62: Edit System Authentication

The following screen will appear.

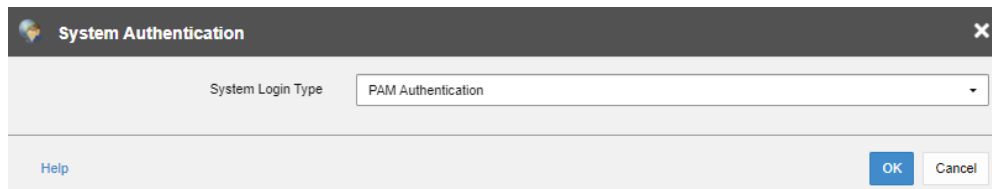


Figure 63: System Authentication

Click on the Drop Down and select the “Internal Webserver” option.
Click on the “OK” button.



Figure 64: Internal Webserver option

47. The following screen will appear. Click **Apply**. Click **Save**.

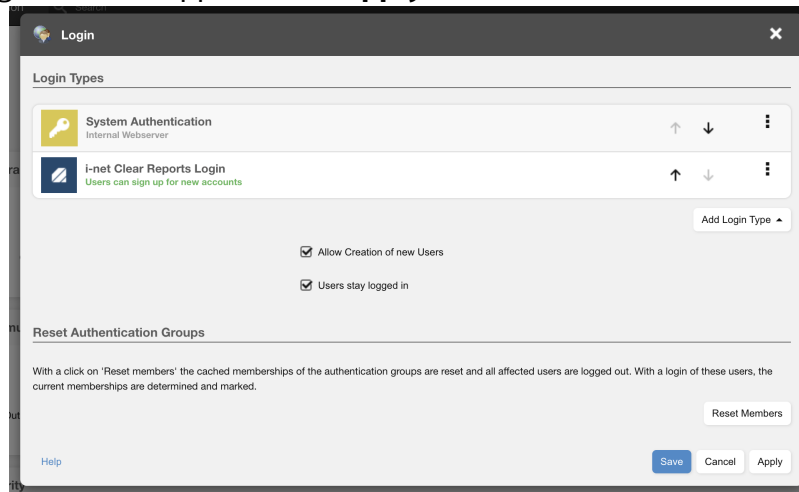


Figure 65: Login pop-up

48. Now logout of the clearreports webserver.

49. Open the EMS GUI.

50. Launch Reporting Studio by selecting **Tools**, and then **Reporting Studio**.



Figure 66: EMS GUI

51. The following page will load on the browser. Click **Internal Webserver**.

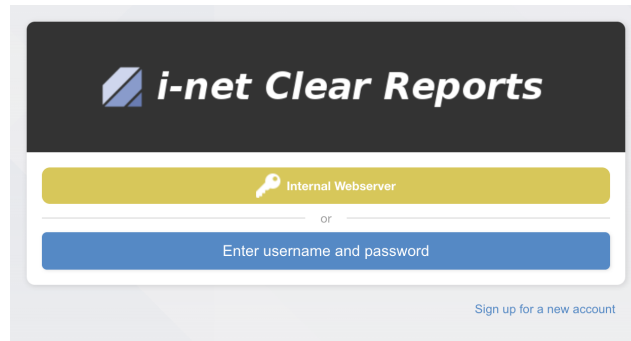


Figure 67: Open Reporting Studio from EMS GUI

The following page will load:

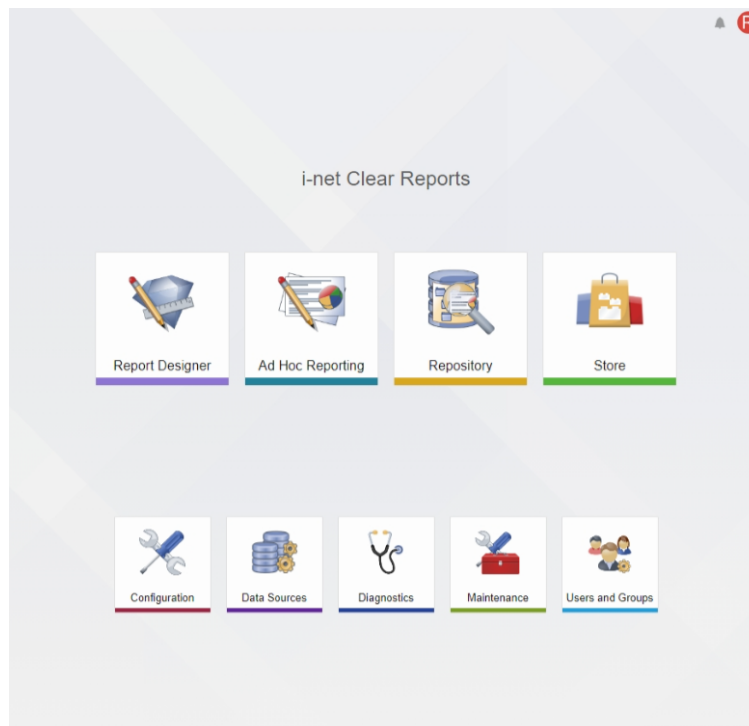


Figure 68: Configured Reporting Studio

Reporting Studio is now completely installed and configured.

If you get the following page,

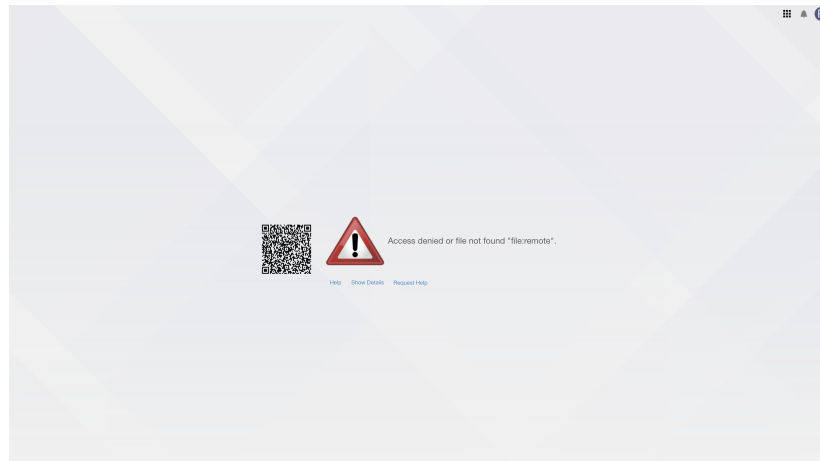


Figure 69: Access Denied Page

Click on “**Back to Start Page**” from the Card Options Button

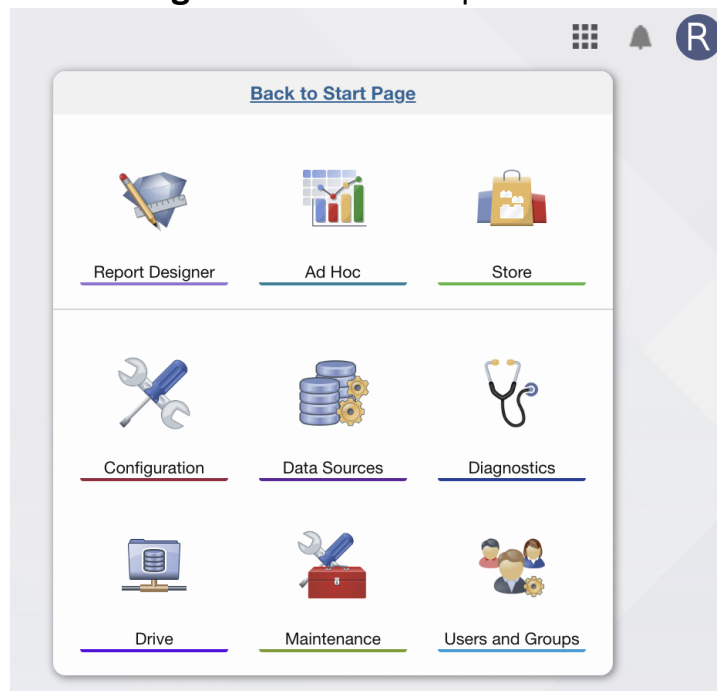


Figure 70: Back to Start Page

After that you should see the following start page

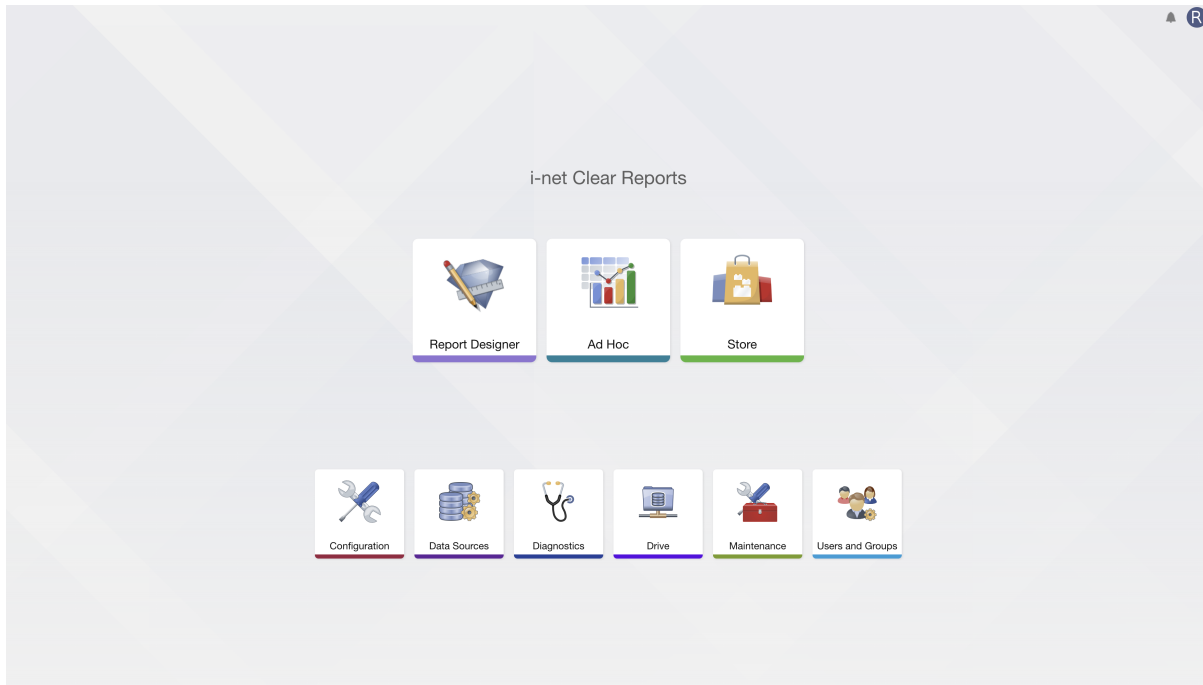


Figure 71: i-net Clear Reports


After logging in again, open Drive from the Start Page. In the Drive page, if you are unable to see the reportingStudioDrive that was created in Step 16, then follow step 10-22. This will solve the issue.

4.0 CHECKING IF I-NET IS INSTALLED OR NOT

Run the following command with ‘root’ user to check whether i-net is installed or not:

```
[emsadmuser@EMS4 ~]$ rpm -qa | grep -i clear  
clear-reports-server-<version>  
[emsadmuser@EMS4 ~]$
```

If the output displays “clear-reports-server-<version>”, then it is installed as shown below:

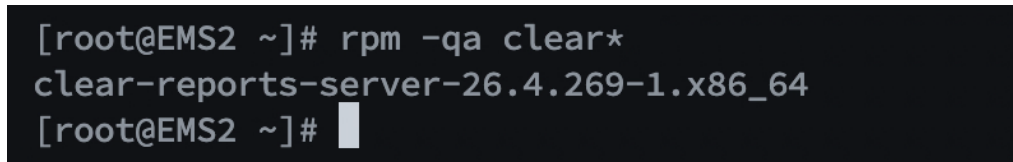

```
[root@EMS2 ~]# rpm -qa clear*  
clear-reports-server-26.4.269-1.x86_64  
[root@EMS2 ~]#
```


Figure 72: Checking if i-net is installed or not

If the output is blank, then it is not installed.

5.0 STARTING THE I-NET SERVICE

1. **Give Permission to the NON-Root User (this needs to be run only once):** Run the following commands from the root user to make sure that the non-root user has the permission to restart/start/stop/status clear-reports-service. Assuming the admin username is emsadmuser, run the below command. UserID of adminuser name is different, replace emsadmuser with the admin username in the below commands.

```
# echo 'emsadmuser ALL=(root) NOPASSWD: /sbin/service clear-reports restart' | sudo tee -a /etc/sudoers
# echo 'emsadmuser ALL=(root) NOPASSWD: /sbin/service clear-reports start' | sudo tee -a /etc/sudoers
# echo 'emsadmuser ALL=(root) NOPASSWD: /sbin/service clear-reports stop' | sudo tee -a /etc/sudoers
# echo 'emsadmuser ALL=(root) NOPASSWD: /sbin/service clear-reports status' | sudo tee -a /etc/sudoers
```

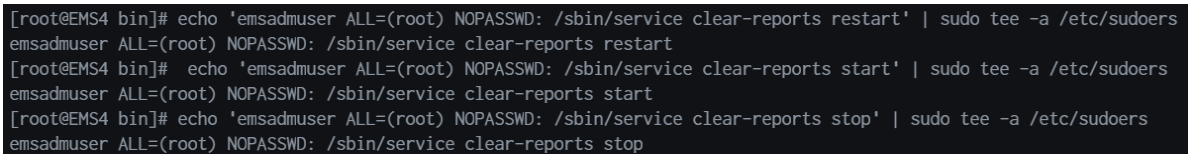


```
[root@EMS4 bin]# echo 'emsadmuser ALL=(root) NOPASSWD: /sbin/service clear-reports restart' | sudo tee -a /etc/sudoers
emsadmuser ALL=(root) NOPASSWD: /sbin/service clear-reports restart
[root@EMS4 bin]# echo 'emsadmuser ALL=(root) NOPASSWD: /sbin/service clear-reports start' | sudo tee -a /etc/sudoers
emsadmuser ALL=(root) NOPASSWD: /sbin/service clear-reports start
[root@EMS4 bin]# echo 'emsadmuser ALL=(root) NOPASSWD: /sbin/service clear-reports stop' | sudo tee -a /etc/sudoers
emsadmuser ALL=(root) NOPASSWD: /sbin/service clear-reports stop
```

Figure 73: Giving permission to non-root user to start/stop/restart clear-reports-server

2. Move to the directory “/Tekelec/WebNMS/bin” and run the script “inetService.sh start” with the non-root user, to start the i-net service.

```
# cd /Tekelec/WebNMS/bin
# sh inetService.sh start
```

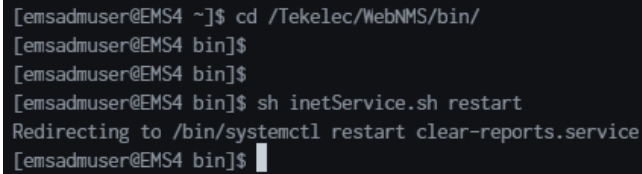

```
[emsadmuser@EMS4 ~]$ cd /Tekelec/WebNMS/bin/
[emsadmuser@EMS4 bin]$
[emsadmuser@EMS4 bin]$
[emsadmuser@EMS4 bin]$ sh inetService.sh restart
Redirecting to /bin/systemctl restart clear-reports.service
[emsadmuser@EMS4 bin]$
```

Figure 74: Starting the i-net Service with root user

6.0 UNINSTALLING I-NET

Run the following commands using the root user in the EMS Server CLI.

- `rm -rf /tmp/clear-reports-$currentInetUser.out`
- `rpm -ev clear-reports-server`
- `rm -rf /usr/share/i-net-clear-reports/`

Remove the configuration if it is required. If the configurations are not removed, it will be restored on re-installing i-net Clear Reports.

To remove the configuration, follow the following steps:

Run the following commands with root user:

```
# rm -rf /home/clearreports/.java/.userPrefs/com/inet/report/config/cc/Default/
# rm -rf /home/clearreports/.java/.userPrefs/com/inet/report/config/datasource/e5msdb/
# rm -rf /home/clearreports/.i-net\ software/reporting_User_Default/AllUsers/*
```

7.0 APPENDIX A: Report Data Rendering and Generation

When to use:

- When there is heavy data processing and rendering required for any report
- When time taken to generate report is more than 10 min.

Procedure:

1. Launch Reporting Studio from Ems GUI
2. Open Configuration section and Switch to Advance View.
 - a. Use section - 3.3 of Reporting Studio Installation document -> Step - 7, 8 and 9 to go to Configuration Section.
3. Goto Report -> Cache
4. Change Engine Cache Timeout: 0


A screenshot of a configuration field labeled "Engine Cache Timeout". The field is a text input box containing the value "0". To the right of the input box is a dropdown menu currently showing "Hours". The entire field is enclosed in a light gray border.

Figure 75: Engine Cache Timeout

5. Change Data Cache Timeout: 45 Min


A screenshot of a configuration field labeled "Data Cache Timeout". The field is a text input box containing the value "45". To the right of the input box is a dropdown menu currently showing "Minutes". The entire field is enclosed in a light gray border.

Figure 76: Data Cache Timeout

6. Save and Apply
7. Restart i-net Service.

8.0 APPENDIX B: MY ORACLE SUPPORT



CAUTION: Use only the guide downloaded from the Oracle Technology Network (OTN) (<http://www.oracle.com/technetwork/indexes/documentation/oracle-comms-tekelec-2136003.html>).

Before upgrading your system, access the **My Oracle Support** web portal (<https://support.oracle.com>) and review any Knowledge Alerts that may be related to the System Health Check or the Upgrade.

Web portal (preferred option): My Oracle Support (MOS) (<https://support.oracle.com>)

Phone: Contact your local Oracle Global Customer Support Center

(<http://www.oracle.com/support/contact.html>) Make the following selections on the Support telephone menu:

1. Select '2' for New Service Request
2. Select '3' for Hardware, Networking and Solaris Operating System Support
3. Select '1' for Technical Issues and when talking to the agent, please indicate that you are an existing Tekelec customer