

**Oracle® Communications
Performance Intelligence Center
SIGTRAN Surveillance Guide
Release 10.3.0
E98817-01**

December 2018

Copyright © 2003, 2018 Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notices are applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.



CAUTION: Use only the guide downloaded from Oracle Help Center.

Table of Contents

1. Chapter About this Help Text.....	5
SCOPE AND AUDIENCE.....	5
GENERAL INFORMATION.....	5
2. Chapter Getting Started with SIGTRAN Surveillance	6
INTRODUCTION TO SIGTRAN SURVEILLANCE.....	6
LOGGING INTO SIGTRAN SURVEILLANCE	6
SIGTRAN SURVEILLANCE MAIN SCREEN	7
3. Chapter Working with SIGTRAN Surveillance.....	11
NETWORK ELEMENTS IN SIGTRAN SURVEILLANCE	12
Appendix A: My Oracle Support	27

List of Figures

Figure 2: Login Screen.....	7
Figure 3: SIGTRAN Surveillance first login for a user	8
Figure 4: SIGTRAN Surveillance with saved panels.....	8
Figure 5: Banner	9
Figure 6: New Paneel	9
Figure 7: Preferences	9
Figure 8: Panel Area	10
Figure 9: CommCenter	10
Figure 10: Dialogue Box for Table Monitoring Panel.....	13
Figure 11: Table Monitoring Panel.....	14
Figure 12: Dialogue Box for TopN Monitoring.....	15
Figure 13: Panel for TopN Monitoring	16
Figure 14: Dialogue Box for Chart Monitoring.....	17
Figure 15: Panel for Chart Monitoring	18
Figure 16: Panel Dynamic Parameters	19
Figure 17: Panel Size	19
Figure 18: Panel Refresh Parameter	20
Figure 19: Child Panel	21
Figure 20: Linkset with IPSG and IPGW Card Links	24
Figure 21: Hierarchy with Unconfigured Traffic	25

List of Tables

Table 2: Functional Expectations per Card basis	11
---	----

1. Chapter About this Help Text

SCOPE AND AUDIENCE

This guide is designed to assist users assigned the roles of nspUser, nspPowerUser and nspManager in working with SIGTRAN Surveillance. This application is designed to enable the user to view the operational state, (status and state), of a monitored network using SIGTRAN regardless of whether any monitored element (association, linkset, link, cards and application server) is in an alarm state or not.

Note: In order to get the most from this user guide, the user should have a good working knowledge of SS7, SIGTRAN and other telecom-related protocols. For more information on Eagle SIGTRAN, refer to the Tekelec Eagle 5 SIGTRAN User Guide.

GENERAL INFORMATION

You can find general information about Oracle® Communications Performance Intelligence Center, such as product overview, list of other guides, workstation requirements, login and logout procedures, user preference settings, in the Quick Start Guide. This document is available from the Portal menu or can be downloaded from Oracle Help Center (OHC).

2. Chapter Getting Started with SIGTRAN Surveillance

INTRODUCTION TO SIGTRAN SURVEILLANCE

Sigtran Surveillance is an application developed to gather and display information pertaining to SS7 links and associations when the underlying transport mechanism is SigTran. Functioning as a near real-time application, Sigtran Surveillance indicates state and status of links, linksets, associations, cards and application server(s) that make up a network. The Sigtran Surveillance application is integrated into the Management Application Platform and functions on a network view context. Sigtran Surveillance provides the capability to view overall status of elements, as well as to drill down to individual links and associations.

When Integrated Acquisition based, only traffic from IPSG and IPGW cards is supported and the SigTran mechanism must be used to send data to the Integrated Acquisition.

LOGGING INTO SIGTRAN SURVEILLANCE


Complete these steps to open the Sigtran Surveillance application.

1. Using a Web browser, type in the IP address of the Management Application *Server*.

Note: 1.Management Application only supports versions of IE 11.0 or later and Firefox 3.6 or later. Before using Management Application, turn off the browser pop up blocker for the Management Application site.

2. Contact your system administrator to obtain the IP address for the Management Application *Server*.

3. SIGTRAN Surveillance runs on a Web interface and uses an IP address to access the Management Application platform. The URL can be saved in the Favorites list on your browser.

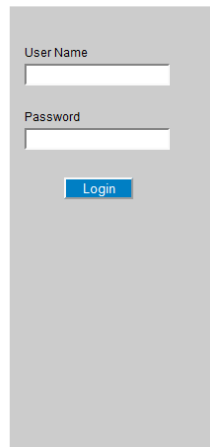A screenshot of a login screen. It features a light gray background. At the top, there is a label 'User Name' above a white text input field. Below that is a label 'Password' above another white text input field. At the bottom of the form is a blue button with the word 'Login' in white text.

This is a private computer system. Unauthorized access or use may lead to prosecution.

Figure 1: Login Screen

2. Log into Management Application by typing:

- Your Userid
- Your Password

Note: Check with your system administrator for your userid and password.

3. Click the Sigtran Surveillance icon in the application section of the portal to open the Sigtran Surveillance.

SIGTRAN SURVEILLANCE MAIN SCREEN

The Sigtran Surveillance application monitors the state and status of the Eagle elements (application servers, application server processes, associations, linksets, links and cards), that reside on Integrated Acquisition. It also can monitor the state and status of Probed Acquisition elements when Probed Acquisition is using SigTran.

Note: Network Elements associated with Integrated Acquisition must be synchronized through the Centralized Configuration. For more information about Centralized Configuration, see the Centralized Configuration Guide or contact your system administrator.

Note: Unconfigured elements, (not configured in Centralized Configuration), associated with Probed Acquisition are also displayed in Sigtran Surveillance in black (see [Status / State Color Interpretations](#) for more information).

If the user is opening the application first time (meaning no Panel is saved from previous use) then there will be no panels in the page body. If saved panel configurations exist for the user, then those will be

loaded on login and start in refresh active mode, in their last size and order (see **configuration auto-backup**)

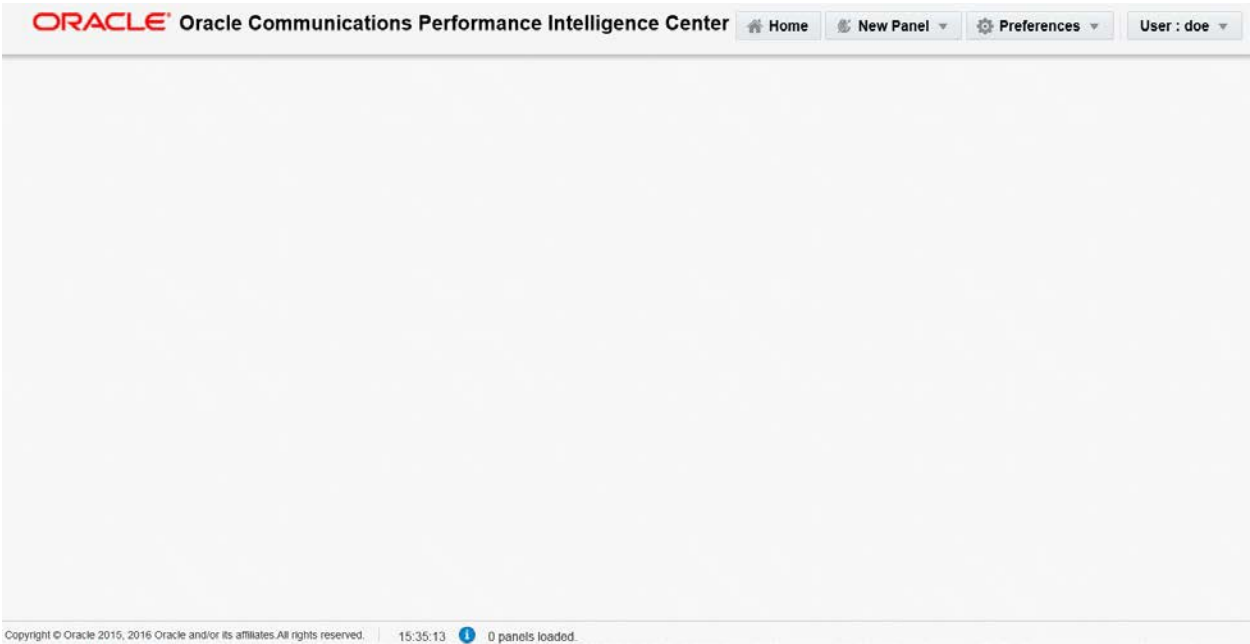


Figure 2: SIGTRAN Surveillance first login for a user

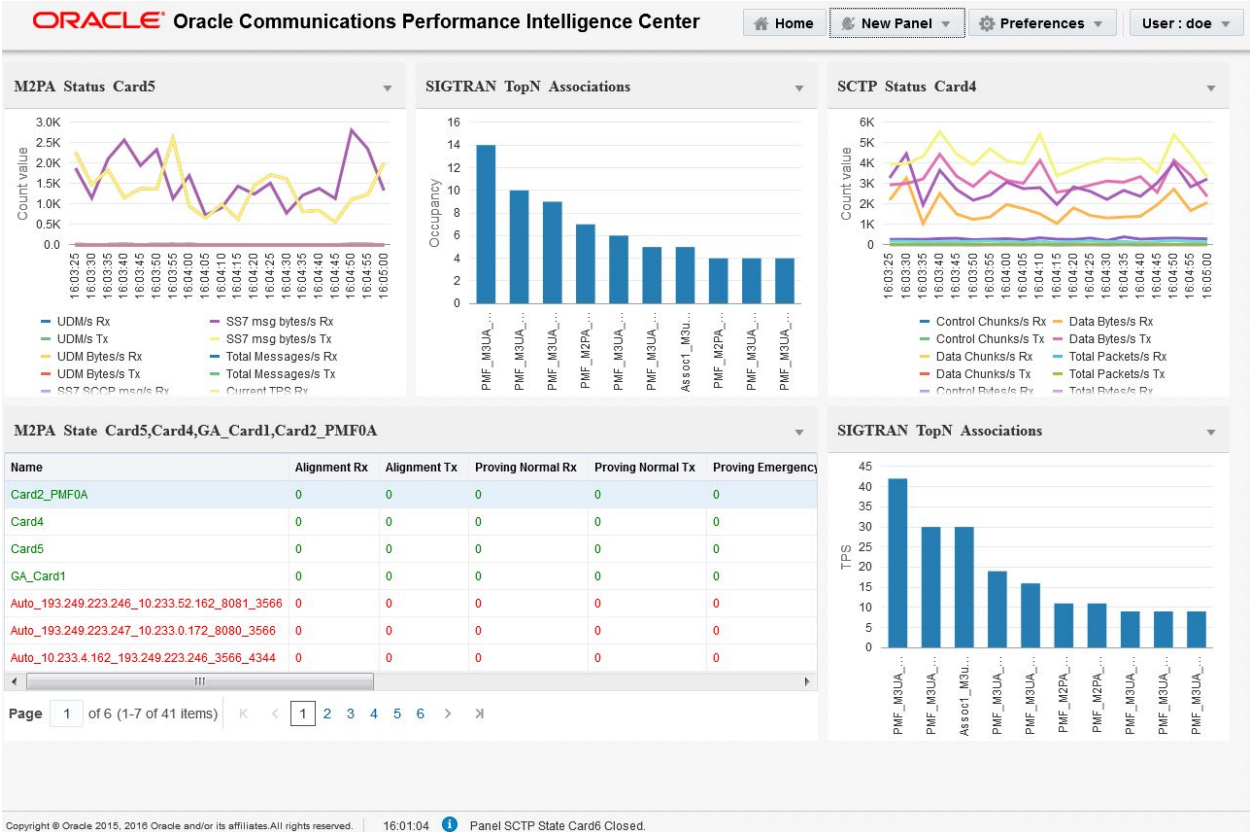


Figure 3: SIGTRAN Surveillance with saved panels

The Sigtran Surveillance main screen has the following sections:

Banner

It is single line component to provide application menus.




Figure 4: Banner

Home

This menu button will take user back to portal screen.

New Panel

It will appear as drop down menu and will provide an option "SIGTRAN Surveillance" to create a panel. On click, a dialogue box shall be launched to collect parameters about panel configuration.




Figure 5: New Paneel

Preferences

This menu option shall provide application specific preferences. In this version it shall provide an option "Reset SIGTRAN Counters", which will reset globally all the counters.




Figure 6: Preferences

Panel Area

This area shall hold all the panels that have been created by the user.



Figure 7: Panel Area

Communication Center

This is present at the bottom and this will inform user about client messages and will be user to perform user interactions.

Figure 8: CommCenter

3. Chapter Working with SIGTRAN Surveillance

OVERVIEW OF SIGTRAN SURVEILLANCE FUNCTIONALITY

Sigtran Surveillance supports SigTran by Integrated Acquisition integrated with both Eagle IPGW as well as IPSG cards.

In addition, since Probed Acquisition connects directly to an IP network carrying the SigTran traffic, reference data must be supplied by the customer in order for Sigtran Surveillance to accurately monitor Probed Acquisition carrying SigTran traffic. This reference data is used to "instruct" the Performance Intelligence Center system on relationships between linksets, links, associations and application servers. The reference data required also specifies the capacity and threshold for the defined element.

Sigtran Surveillance performs the following functions:

- Allow monitoring of multiple cards, Probed Acquisition s, linksets, links, associations, application servers and application processes
- Allows searching for specific elements utilizing a search field
- Saving Favorite List
- Monitor status and state of an element(s)
- Show missing Probed Acquisition reference data for an element
- Monitor element(s) in either table or graph format
- Monitor TOP N Associations by TPS or Occupancy
- Reset capability for state counts to zero
- Choose a specific color scheme using the themes option

Card Functional Specifications

Sigtran Surveillance supports SigTran by Integrated Acquisition integrated with both Eagle IPGW as well as IPSG cards. This table shows the functional expectations on a per card basis.

Table 1: Functional Expectations per Card basis

Application	Hardware	GPL	Protocols	ANSI/ITU	Monitoring Type
SS7IPGW	SSEDCM	SS7IPGW	M3UA	ANSI	STC-STYLE
SS7IPGW	E5-ENET	IPGHC	SUA / M3UA	ANSI	STC-STYLE or SigTran
IPGWI	SSEDCM	IPGWI	M3UA	ITU	STC-STYLE
IPGWI	E5-ENET	IPGHC	SUA / M3UA	ITU	STC-STYLE or SigTran
IPSG	E5-ENET	IPSG	M2PA / M3UA	ANSI+ITU	STC-STYLE or SigTran

NETWORK ELEMENTS IN SIGTRAN SURVEILLANCE

Network elements refer to customer network elements monitored by the Performance Intelligence Center system such as:

- Application Servers
- Application Server Processes
- Associations
- Linksets
- Links
- Cards (IPSG, IPGW for Integrated Acquisition and third-party cards for Probed Acquisition)

Panel Creation in SIGTRAN Surveillance

A panel for Table, TopN and Graph monitoring can be created using “New Panel” menu from the banner. A user can select “SIGTRAN Surveillance” option from “New Panel” menu, on click a dialogue box shall be launched to provide configuration information for desired panel.

Following parameters are required for the panel creation:

- Refresh Rate: User can select refresh rate from 5sec, 15sec, 30sec and 1min. Default is 5sec. The data in panel will refresh after selected interval.
- Report: User can select Table, TopN and Graph as monitoring type. The selection for the remaining parameters depend on “Report” type.
- Protocol: User can select “SCTP”, “M2PA”, “M3UA”, “SUA” as protocol. The selection for the remaining parameters depend on the “Protocol”.
- Root Hierarchy: User can select “Card” or “ApplicationServer/Linkset”. Default is “ApplicationServer/Linkset”.
- Counters: User can select State or Status as counters type.
- Include By: This field denotes the type of network element that can be selected from the drop down list. This list will depend on the “Protocol” selected.
- Element: This is a combo box and user shall select the actual network element in this field. This will depend on the “Include By” field.
- Criteria: user can select “Occupancy” or “TPS”. This is applicable only for TopN Association monitoring.
- Excluded Associations: This is a combo box and user can select the associations to be excluded from the TopN monitoring.
- Select By: User can select the type of network element on the basis of which Element can be selected for chart monitoring.

Table Monitoring in SIGTRAN Surveillance

SIGTRAN Surveillance [X]

Refresh Rate * ☒ 5s ☐ 15s ☐ 30s ☐ 1m

Report * ☒ Table ☐ TopN ☐ Chart

Protocol * ☒ SCTP ☐ M2PA ☐ M3UA ☐ SUA

Root Hierarchy * ☐ Cards ☒ Application Servers/ LinkSets

Counters * ☒ State ☐ Status

Include By * Cards ▼

Elements * [X] [X]

Done

Figure 9: Dialogue Box for Table Monitoring Panel

Complete these steps to create table monitoring panel

1. Click on “New Panel” and select “SIGTRAN Surveillance” option from drop down.
2. Select “Refresh Rate”, “Report as Table”, “Protocol”, “Root Hierarchy”, “Counters”, “Include By” and “Elements”.
3. Click on “Done” to create the panel.

M2PA Status Card4,Card5,GA_Card1,Card2_PMF0A(5s) ▼									
Name	Status	UDM/s Rx	UDM/s Tx	UDM Bytes/s Rx	UDM Bytes/s Tx	SS7 SCCP msg/s Rx	SS7 SCCP msg/s Tx	ISUP	
Assoc_GA3	A	0	0	0	0	0	0	0	
Assoc_GA_1	A	0	0	0	0	0	0	0	
Assoc_GA_2	A	0	0	0	0	0	0	0	
Assoc_GA_4	A	0	0	0	0	0	0	0	
Assoc_GA_5	A	0	0	0	0	0	0	0	
Assoc_GA_6	A	0	0	0	0	0	0	0	
Assoc_GA_7	A	0	0	0	0	0	0	0	
Assoc_GA_8	A	0	0	0	0	0	0	0	
Assoc_M2PA1	A	0	2	0	83	0	1	0	
PMF_M2PA_Assoc10	A	0	1	0	16	0	0	0	
PMF_M2PA_Assoc11	A	4	10	159	1091	3	9	0	
PMF_M2PA_Assoc12	A	4	6	201	479	2	6	0	
PMF_M2PA_Assoc13	A	2	4	205	394	2	4	0	
PMF_M2PA_Assoc14	A	2	1	193	93	2	1	0	
PMF_M2PA_Assoc15	A	6	4	848	511	6	4	0	
PMF_M2PA_Assoc16	A	5	0	737	0	5	0	0	
PMF_M2PA_Assoc17	A	0	2	0	191	0	2	0	
PMF_M2PA_Assoc18	A	0	6	0	478	0	6	0	
PMF_M2PA_Assoc19	A	4	1	456	16	4	0	0	

111


Page 1 of 4 (1-19 of 71 items)

1
2
3
4

Figure 10: Table Monitoring Panel

The title of the panel should indicate the user selection during panel creation. The refresh rate shall be indicated at the end of panel's title.

TopN Association Monitoring in SIGTRAN Surveillance

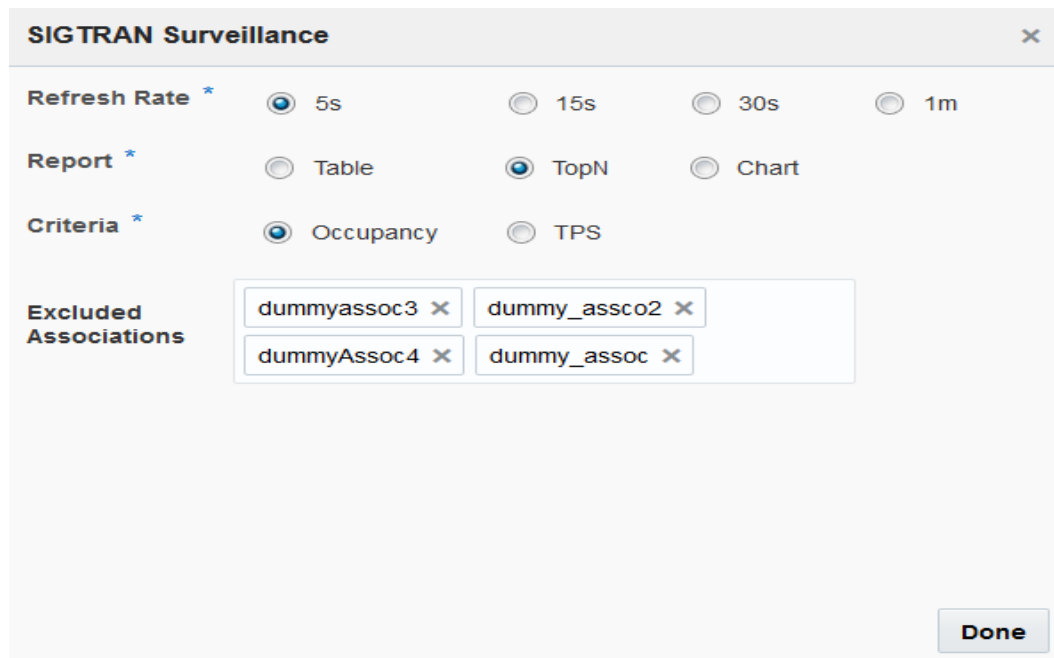

The image shows a software dialog box titled "SIGTRAN Surveillance" with a close button (X) in the top right corner. The dialog contains four main sections for configuration:

- Refresh Rate ***: Four radio buttons are present: "5s" (selected), "15s", "30s", and "1m".
- Report ***: Three radio buttons are present: "Table", "TopN" (selected), and "Chart".
- Criteria ***: Two radio buttons are present: "Occupancy" (selected) and "TPS".
- Excluded Associations**: A container with four text input fields, each followed by a close button (X). The fields contain the text: "dummyassoc3", "dummy_assco2", "dummyAssoc4", and "dummy_assoc".

A "Done" button is located at the bottom right of the dialog box.

Figure 11: Dialogue Box for TopN Monitoring

Complete these steps to create TopN Association monitoring panel

1. Click on "New Panel" and select "SIGTRAN Surveillance" option from drop down.
2. Select "Refresh Rate", "Report as TopN", "Criteria" "Exclude Associations".
3. Click on "Done" to create the panel.


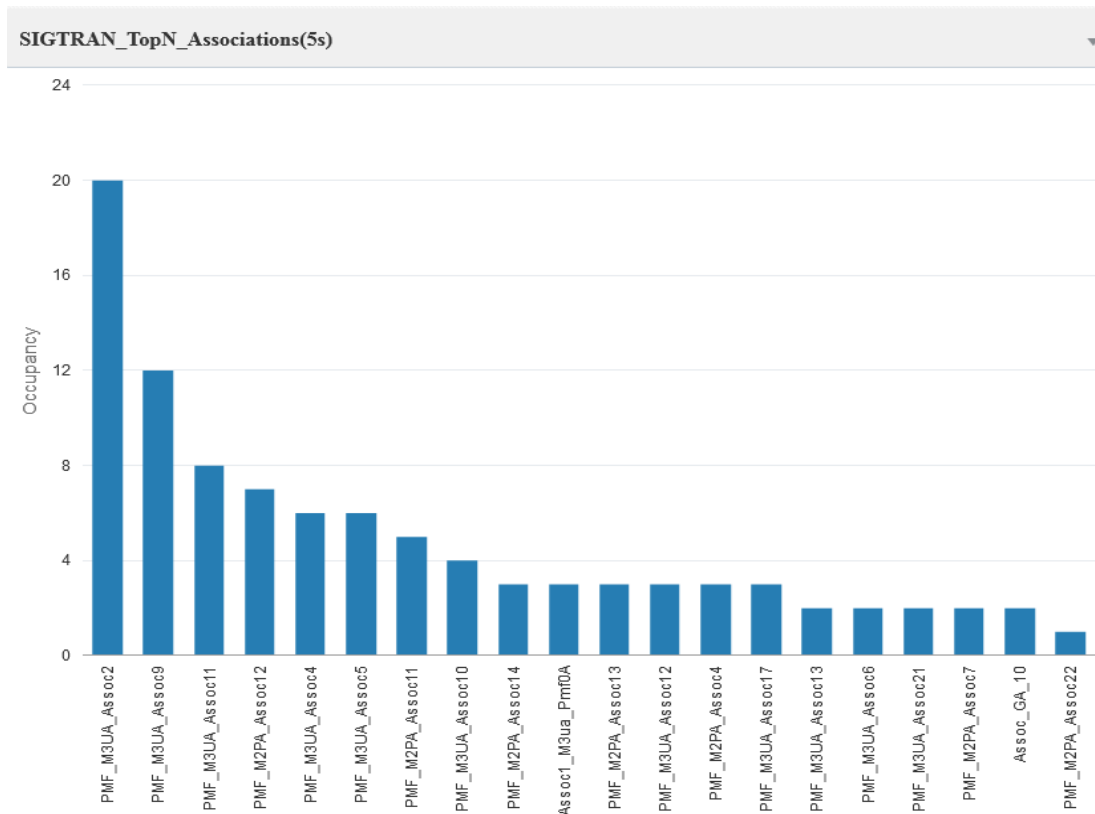


Figure 12: Panel for TopN Monitoring

Graph Monitoring in SIGTRAN Surveillance

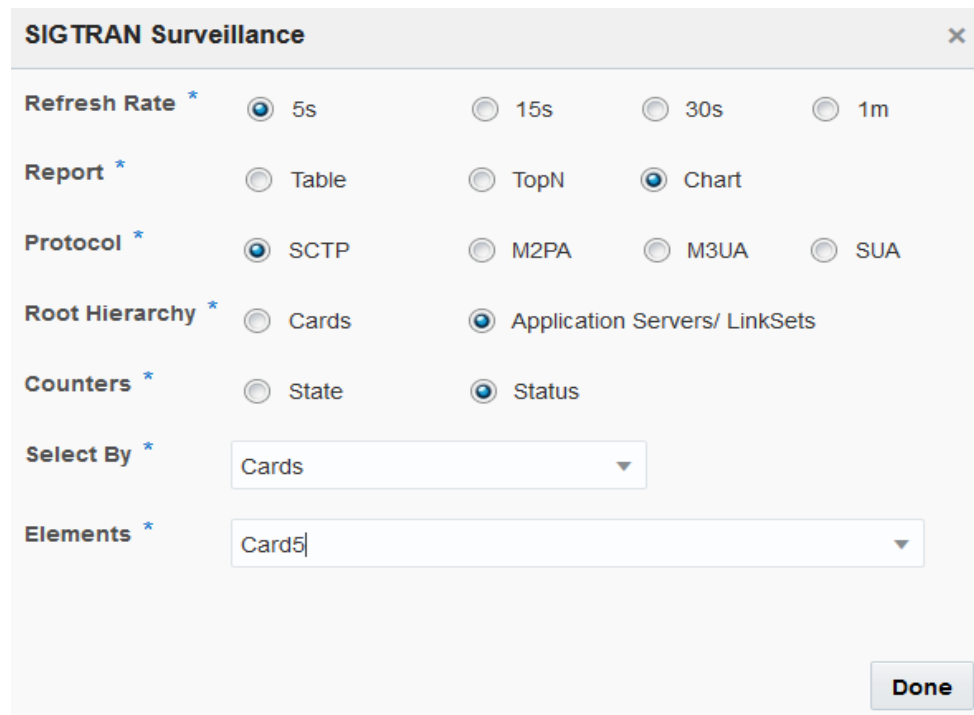

The image shows a dialog box titled "SIGTRAN Surveillance" with a close button (X) in the top right corner. The dialog contains several configuration options, each with a radio button or a dropdown menu. The options are: "Refresh Rate" with radio buttons for 5s (selected), 15s, 30s, and 1m; "Report" with radio buttons for Table, TopN, and Chart (selected); "Protocol" with radio buttons for SCTP (selected), M2PA, M3UA, and SUA; "Root Hierarchy" with radio buttons for Cards and Application Servers/ LinkSets (selected); "Counters" with radio buttons for State and Status (selected); "Select By" with a dropdown menu showing "Cards"; and "Elements" with a dropdown menu showing "Card5". A "Done" button is located at the bottom right of the dialog.

Option	Selected
Refresh Rate	5s
Report	Chart
Protocol	SCTP
Root Hierarchy	Application Servers/ LinkSets
Counters	Status
Select By	Cards
Elements	Card5

Figure 13: Dialogue Box for Chart Monitoring

Complete these steps to create Chart monitoring panel

1. Click on "New Panel" and select "SIGTRAN Surveillance" option from drop down.
2. Select "Refresh Rate", "Report as Chart", "Protocol", "Threshold – min and max", "Root Hierarchy", "Counters", "Select By" and "Elements".
3. Click on "Done" to create the panel.

Note: Only one network element can be selected for the chart monitoring.


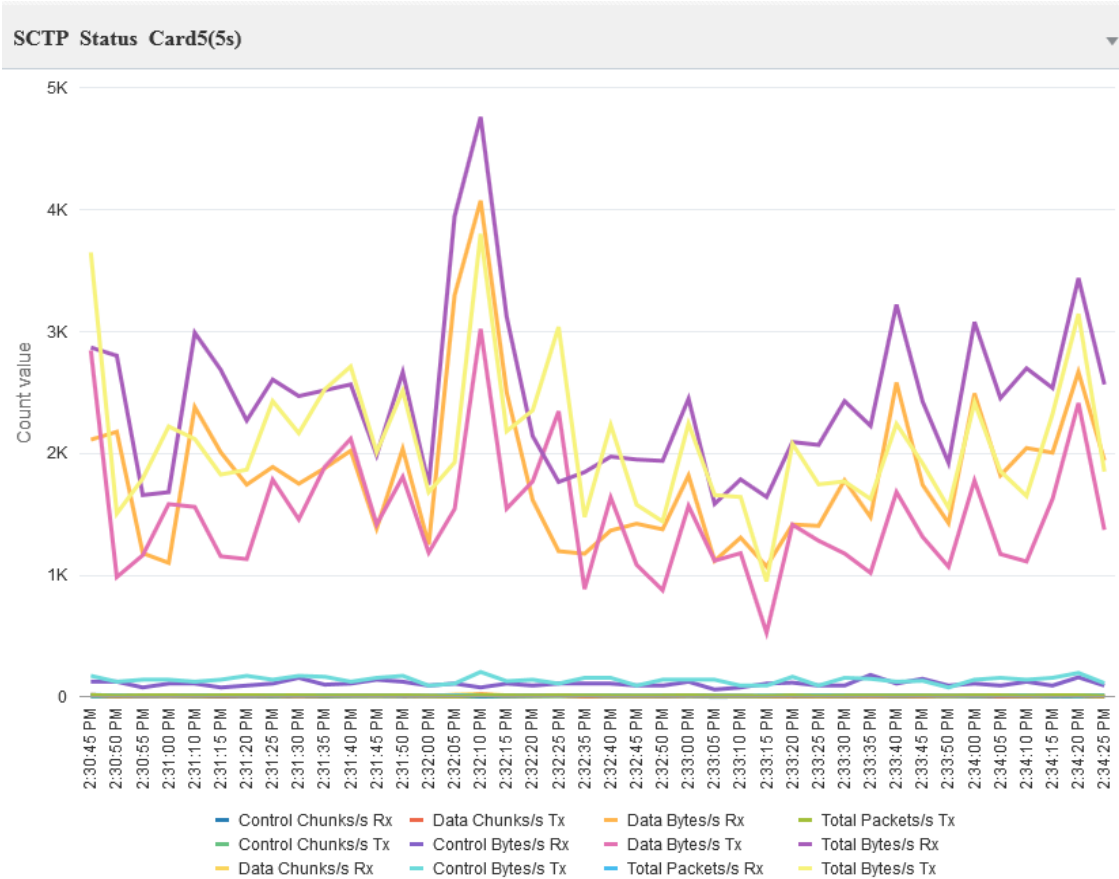


Figure 14: Panel for Chart Monitoring

Dynamic Parametrs for Panel

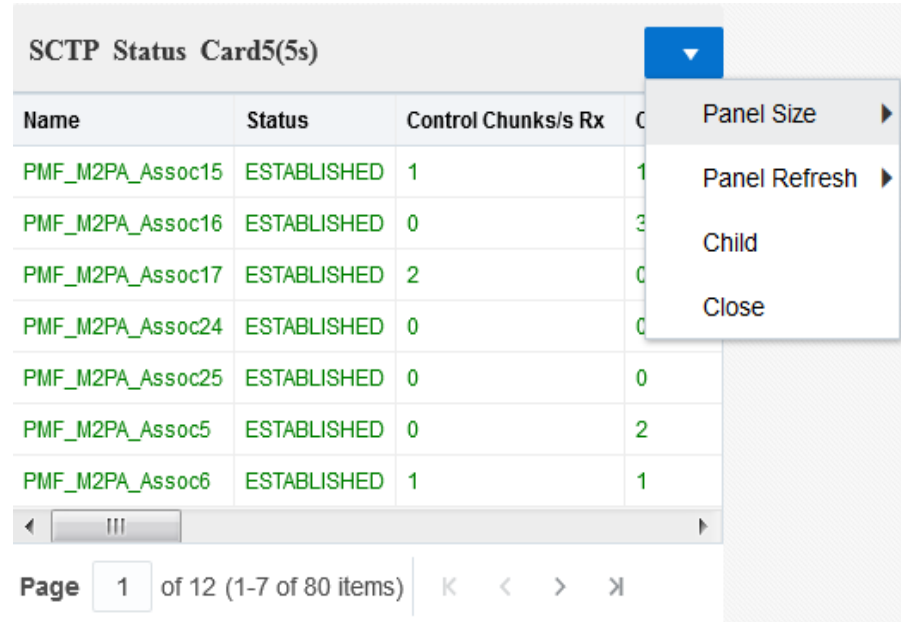

The screenshot shows a panel titled "Sctp Status Card5(5s)". It contains a table with the following data:

Name	Status	Control Chunks/s Rx	Control Chunks/s Tx
PMF_M2PA_Assoc15	ESTABLISHED	1	1
PMF_M2PA_Assoc16	ESTABLISHED	0	3
PMF_M2PA_Assoc17	ESTABLISHED	2	0
PMF_M2PA_Assoc24	ESTABLISHED	0	0
PMF_M2PA_Assoc25	ESTABLISHED	0	0
PMF_M2PA_Assoc5	ESTABLISHED	0	2
PMF_M2PA_Assoc6	ESTABLISHED	1	1


Below the table is a pagination bar showing "Page 1 of 12 (1-7 of 80 items)". A context menu is open over the table, showing the following options: "Panel Size", "Panel Refresh", "Child", and "Close".

Figure 15: Panel Dynamic Parameters

There are four dynamic parametrs that can be modified/selected after the panel has been created.

Panel Size

User can select the panel size from 1x1, 2x1, 3x1, 2x2, 3x2 options

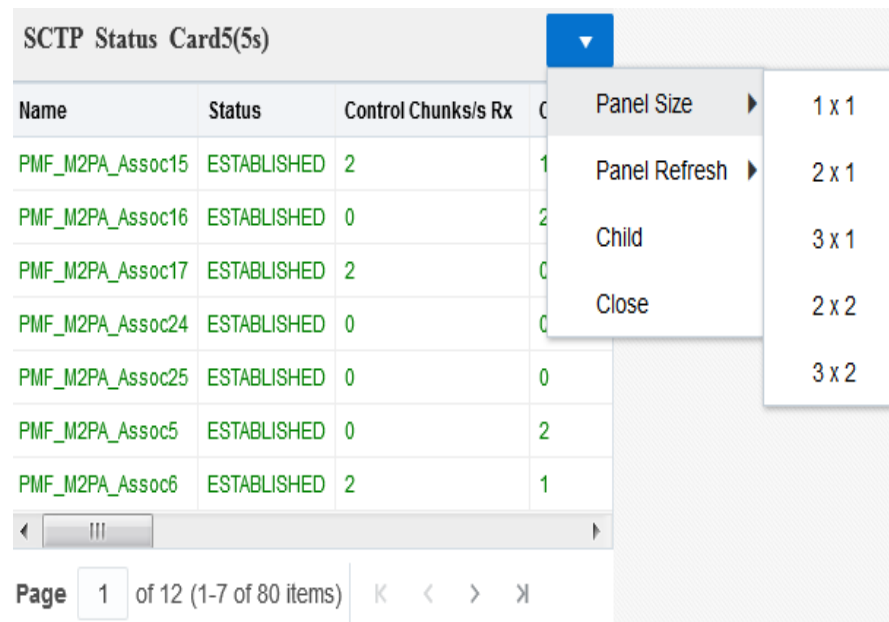


The screenshot shows the same panel as Figure 15, but the context menu is open and the "Panel Size" option is selected. The sub-menu for "Panel Size" is visible, showing the following options: "1 x 1", "2 x 1", "3 x 1", "2 x 2", and "3 x 2".

Figure 16: Panel Size

Panel Refresh

User can activate or pause the panel, using Panel Refresh parameter. Active panel will refresh at the rate selected during panel creation. Pause option shall stop the panel data refresh.

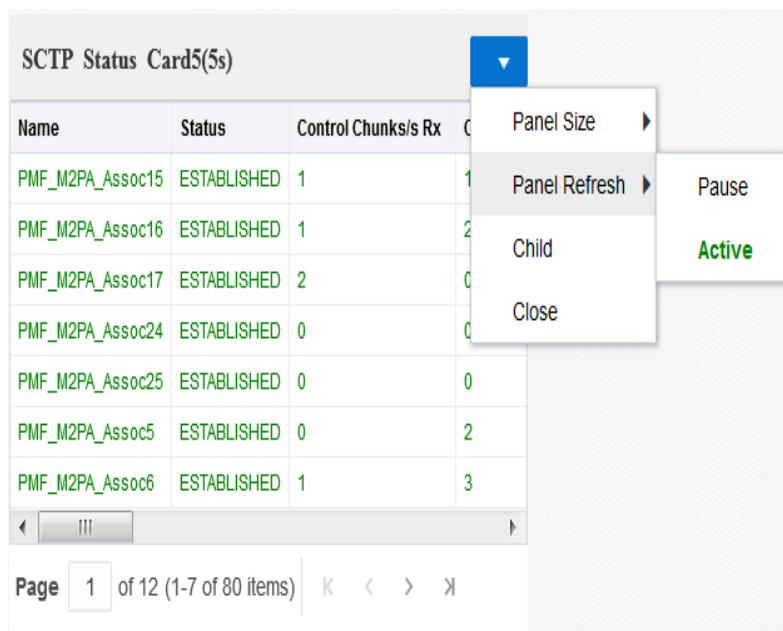

The screenshot shows a web interface for 'SCTP Status Card5(5s)'. It contains a table with 4 columns: Name, Status, Control Chunks/s Rx, and Control Chunks/s Tx. The table lists several PMF_M2PA_Assoc entries, all with a status of 'ESTABLISHED'. A context menu is open over the table, showing options: Panel Size, Panel Refresh, Child, and Close. The 'Panel Refresh' option is highlighted, and a sub-menu is visible with 'Pause' and 'Active' (in green) options. Below the table is a pagination bar showing 'Page 1 of 12 (1-7 of 80 items)' and navigation icons.

Name	Status	Control Chunks/s Rx	Control Chunks/s Tx
PMF_M2PA_Assoc15	ESTABLISHED	1	1
PMF_M2PA_Assoc16	ESTABLISHED	1	2
PMF_M2PA_Assoc17	ESTABLISHED	2	0
PMF_M2PA_Assoc24	ESTABLISHED	0	0
PMF_M2PA_Assoc25	ESTABLISHED	0	0
PMF_M2PA_Assoc5	ESTABLISHED	0	2
PMF_M2PA_Assoc6	ESTABLISHED	1	3

Page 1 of 12 (1-7 of 80 items)

Figure 17: Panel Refresh Parameter

Child

User can open and view the child as a separate panel using this option. In the hierarchy based relationship e.g. Card->Association, Parent Panel shall display the card and Child panel shall display the Associations. This option is only applicable for the Table Monitoring.

SCTP State Card5,Card6,GA_Card2,GA_Card1...		SCTP State Card5		
Name	HeartBeat Requests R	Name	HeartBeat Requests Rx	HeartBeat Requests Tx
Card5	2182	PMF_M2PA_Assoc15	0	0
Card6	0	PMF_M2PA_Assoc16	0	9224
GA_Card1	14182	PMF_M2PA_Assoc17	1785	0
GA_Card2	0	PMF_M2PA_Assoc24	99	9522
Auto_10.10.10.1_20.20.20.2_2904_2904	0	PMF_M2PA_Assoc25	298	9522
Auto_1.1.1.1_2.2.20.2_2904_2904	0	PMF_M2PA_Assoc5	0	1785
Auto_10.197.125.54_10.197.160.58_2913_2913	0	PMF_M2PA_Assoc6	0	0

Page 1 of 11 (1-7 of 76 items) < > >>

Page 1 of 2 (1-7 of 8 items) < > 1 2 >>

Figure 18: Child Panel

In the above figure, 1st Panel “SCTP State Card5,Card6,GA_Card2,GA_Card1(5s)” is displaying the Cards, the second panel “SCTP State Card5” is the child panel and is displaying all the associations under selected “Card5” in the first panel.

Close

User can use “Close” option to close the panel. On Close, the user shall be asked for the confirmation in the CommCenter.

Status and State Protocol Hierarchy Structures

Each protocol can have up to two hierarchy structures depending if the card is the root or the application server/linkset is the root. Listed here are each of the protocol hierarchies that would appear in either the state or status monitoring screen when an element(s) is selected in the main screen.

Note: Wherever the element of the type defined by a particular level of hierarchy between the related elements of the selected element is not defined in Centralized Configuration, the hierarchy level will be skipped in the current hierarchy. For example, using a hierarchy with the structure of Card > Linkset > Association. If the association A1 in the hierarchy has no linkset defined, and has only the related card C1 defined in the hierarchy, then the hierarchy shown in the monitoring screen will just be Card > Association.

Hierarchy structure(s) according to protocol

Integrated Acquisition-based protocols

IPSG SCTP (Status and State)

Card > Association

IPSG M2PA (Status and State)

Linkset > Card > Association (Link)

Card > Linkset > Association (Link)

Note: Where Association and Link have 1:1 mapping, the Association and Link rows will only be one row since the counts are identical.

IPSG M3UA (Status and State)

Linkset > Card > Association > Link

Card > LinkSet > Association > Link

IPGW SCTP (Status and State)

Linkset > Association

Card > Association

IPGW M3UA (Status and State)

Linkset > Application Server > Association > Application Server Process

Card > Application Server > Association > Application Server Process

IPGW SUA (Status only)

Linkset > Application Server > Association > Application Server Process

Card > Application Server > Association > Application Server Process

Probed Acquisition-based protocols

SCTP (Status and State)

Third Party Card > Association

M2PA (Status and State)

Linkset > Association (Link)

Third Party Card > Association (Link)

M3UA (Status and State)

Application Server > Association > Application Server Process

Third Party Card > Application Server > Association > Application Server Process

SUA Status

Application Server > Association > Application Server Process

Card > Application Server > Association > Application Server Process

Status and State Protocol Hierarchy Constraints

General guidelines for hierarchies

When viewing hierarchies in tabular format, the following guidelines are used:

- The selected element is always displayed in the table.
- The direct parents, grand parents, etc. (to the root), if they exist, are also displayed in the table.
- The display of children elements is filtered through the parent elements.

Additional guidelines when viewing hierarchies

- If there is no related element for some level of hierarchy, the level is skipped.
- Hierarchies can be mixed together; there can be more than one type of hierarchy shown in a table. In addition, for M3UA protocol one element can be related to multiple hierarchies. For example, a linkset, having links to both IPSG and IPGW cards, will appear in the monitoring table like this:

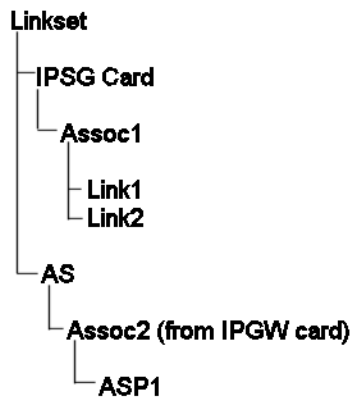


Figure 19: Linkset with IPSG and IPGW Card Links

- Any unconfigured associations for a given protocol are displayed, in italics, as the last elements in the table.

Note: All unconfigured elements are shown as having no children.

There are some exceptions for partially-configured associations on Probed Acquisition and Network management counts on Integrated Acquisition (the display is the same and both are only for M3UA and SUA protocols). They are:

- If traffic exists for an association that is not configured for any ASP belonging to it, then there is a new child shown under the association that shows the counts for the unconfigured traffic - the name of this element is in italics and uses the same name as the association.
- If the association in the hierarchy has no AS or Linkset, the new child is shown in the hierarchy. Conversely, if the association has an Application Server or Linkset in the hierarchy, the new child is shown in the bottom table only (it is filtered out because the unconfigured traffic is not a part of that AS or Linkset) and the association with this child is repeated on the same level as the AS or Linkset and the child is visible alone in the top table. Both association name and the new child name will be in italics. For example, there is Assoc1 on M3UA that has ASP1 and ASP2 with an AS as its parent. In this example, Assoc1 has unconfigured traffic. The hierarchy will appear like this in the tabular monitoring screen:

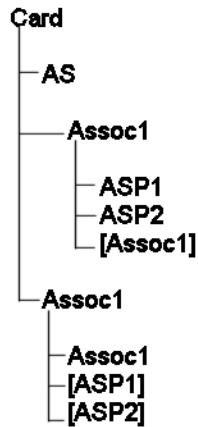


Figure 20: Hierarchy with Unconfigured Traffic

Note: the new child, (Assoc 1), will be visible in the top table and will only appear in the bottom table when the Assoc1 is selected.

Note: Brackets signify that the element is visible only in the bottom table.

Monitoring M2PA and M3UA Guidelines

When monitoring the status or state of an element using these protocols the following network configuration guidelines should be considered:

- For Integrated Acquisition or Probed Acquisition using IPGW, the card can only support one link.
- For Integrated Acquisition or Probed Acquisition using IPSG, the card can support up to 16 links.
- When using the M2PA protocol use a 1:1 ratio of Associations to Links.
- When using the M3UA protocol one association can have multiple links.

Auto-Backup of Panel Settings

Parameters for all panels (size, pause, contents, title, rank) shall be automatically saved without user additional action. To avoid an overhead of client to server communication in case of multiple changes, this shall be deferred with a timer set on a period of 10 seconds.

The effect of this algorithm is that all changes are tracked in client side only first. After a quiet period of 10 seconds, those changes are sent as one general backup (only settings, no counter values, not the cache). CommCenter will notify the user in case of backup is done with message **“Configuration Saved for <n> panels”**.

The effect of the rule above is to have something seamless as long as each user has only one active page (recommended way to use Oracle® Communications Performance Intelligence Center on OJET) but allow predictable behavior in case the user wants to display more (he will not be blocked on changing panels order and content but this will not be persistent).

Normal use of the OJET feature is that each user has his set of 12 most needed panels handy. If a supervision picture wall is needed to service a group, we recommend creating a dedicated account for the group and manage the supervision panels on this account. Example:

- Joe, Phil, Sam get each a private space that works with up to 12 panels saved automatically,
- As a team they can create a "TeamJPS" account to configure a shared supervision dashboard for their big screen

Appendix A: My Oracle Support

MOS (<https://support.oracle.com>) is your initial point of contact for all product support and training needs. A representative at Customer Access Support (CAS) can assist you with MOS registration.

Call the CAS main number at 1-800-223-1711 (toll-free in the US), or call the Oracle Support hotline for your local country from the list at <http://www.oracle.com/us/support/contact/index.html>. When calling, make the selections in the sequence shown below on the Support telephone menu:

1. Select 2 for New Service Request
2. Select 3 for Hardware, Networking and Solaris Operating System Support
3. Select 2 for Non-technical issue

You will be connected to a live agent who can assist you with MOS registration and provide Support Identifiers. Simply mention you are a Tekelec Customer new to MOS.

MOS is available 24 hours a day, 7 days a week.