

Oracle® Communications

Cloud Native Core, Unified Data Repository

Benchmarking Guide



Release 25.1.100
G25038-01
April 2025

ORACLE®

Copyright © 2022, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

1	Introduction	
1.1	Purpose and Scope	1
1.2	References	1
2	Deployment Environment	
2.1	Deployed Components	1
2.2	Deployment Resources	1
2.2.1	Resource Requirements for CNE Observability Services	2
3	UDR Benchmark Testing	
3.1	Test Scenario 1: SLF Call Deployment Model	1
3.1.1	SLF Call Model: 34K TPS and 1.44K Provisioning TPS	1
3.1.2	SLF Call Model: 50K lookup + 1.44K Provisioning TPS	6
3.2	Test Scenario 2: EIR 10k TPS and 10k Diameter S13 Interface TPS	12
3.3	Test Scenario 3: SOAP and Diameter Deployment Model	16
3.4	Test Scenario 4: Policy Data Traffic Deployment Model	24
3.4.1	Policy Data: 17.2K N36, 300 TPS Notifications and 500 TPS Provisioning	24
3.5	Test Scenario 5: 25K N36 and 1.3K Provisioning Profile (600 SOAP and 700 REST)	28
3.6	Test Scenario 6: 17.2K N36 + 10K SH and 1.2K Provisioning Profile (600 SOAP and 600 REST)	34

Preface

- [Documentation Accessibility](#)
- [Diversity and Inclusion](#)
- [Conventions](#)

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Access to Oracle Support

Oracle customer access to and use of Oracle support services will be pursuant to the terms and conditions specified in their Oracle order for the applicable services.

Diversity and Inclusion

Oracle is fully committed to diversity and inclusion. Oracle respects and values having a diverse workforce that increases thought leadership and innovation. As part of our initiative to build a more inclusive culture that positively impacts our employees, customers, and partners, we are working to remove insensitive terms from our products and documentation. We are also mindful of the necessity to maintain compatibility with our customers' existing technologies and the need to ensure continuity of service as Oracle's offerings and industry standards evolve. Because of these technical constraints, our effort to remove insensitive terms is ongoing and will take time and external cooperation.

Conventions

The following text conventions are used in this document:

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

My Oracle Support

My Oracle Support (<https://support.oracle.com>) is your initial point of contact for all product support and training needs. A representative at Customer Access Support can assist you with My Oracle Support registration.

Call the Customer Access Support main number at 1-800-223-1711 (toll-free in the US), or call the Oracle Support hotline for your local country from the list at <http://www.oracle.com/us/support/contact/index.html>. When calling, make the selections in the sequence shown below on the Support telephone menu:

- For Technical issues such as creating a new Service Request (SR), select **1**.
- For Non-technical issues such as registration or assistance with My Oracle Support, select **2**.
- For Hardware, Networking and Solaris Operating System Support, select **3**.

You are connected to a live agent who can assist you with My Oracle Support registration and opening a support ticket.

My Oracle Support is available 24 hours a day, 7 days a week, 365 days a year.

Acronyms

The following table provides information about the acronyms and the terminology used in the document.

Table Acronyms and Terminologies

Acronym	Description
AMF	Access and Mobility Management Function
AUSF	Authentication Server Function
CNE	Oracle Communications Cloud Native Core, Cloud Native Environment
CPU	Central Processing Unit
EIC	Equipment Identity Check
EIR	Equipment Identity Repository
GPSI	Generic Public Subscription Identifier
HTTP	Hypertext Transfer Protocol
MPS	Messages Per Second
NF	Network Function
NRF	Oracle Communications Cloud Native Core, Network Repository Function
PVC	Persistent Volume Claim
RAM	Random Access Memory
SLF	Subscriber Location Function
SOAP	Simple Object Access Protocol
SUPI	Subscription Permanent Identifier
TPS	Transactions Per Second
UDM	Unified Data Management
UDR	Oracle Communications Cloud Native Core, Unified Data Repository
vCNE	Virtual Cloud Native Environment

What's New in This Guide

This section introduces the documentation updates for Release 25.1.1xx.

Release 25.1.100 - G25038-01, April 2025

- Added the [Test Scenario 5: 25K N36 and 1.3K Provisioning Profile \(600 SOAP and 700 REST\)](#) section.
- Added the [SLF Call Model: 50K lookup + 1.44K Provisioning TPS](#) section.
- Updated the [Table 3-6](#) in [SLF Call Model: 34K TPS and 1.44K Provisioning TPS](#) section.

1

Introduction

Oracle Communications Cloud Native Core Unified Data Repository (UDR) is a key component of the 5G Service Based Architecture. It is implemented as a cloud native function and offers a unified database for storing application, subscription, authentication, service authorization, policy data, session binding, and application state information. For more information about UDR architecture, see *Oracle Communications Cloud Native Core, Unified Data Repository User Guide*.

1.1 Purpose and Scope

This document is designed to measure the performance and capacity of UDR, UDR microservices, SLF, EIR, and deployment environment setup software such as Cloud Native Environment (CNE) and cnDBTier.

It is recommended that UDR is run through a benchmark on the target cloud native infrastructure to determine the capacity and performance in the target infrastructure. This information can be used to adjust the initial deployment resources and to predict resource requirements when UDR is scaled up.

1.2 References

- *Oracle Communications Cloud Native Core, Unified Data Repository Installation, Upgrade, and Fault Recovery Guide*
- *Oracle Communications Cloud Native Core, Unified Data Repository User Guide*
- *Oracle Communications Cloud Native Core, Cloud Native Environment Installation, Upgrade, and Fault Recovery Guide*
- *Oracle Communications Cloud Native Core, cnDBTier Installation, Upgrade, and Fault Recovery Guide*

2

Deployment Environment

This section provides information about the cloud native infrastructure used for UDR, SLF, and EIR benchmarking.

2.1 Deployed Components

Deployment Platform

Oracle Communications Cloud Native Environment (OCCNE) and BareMetal is used for performing benchmark tests.

Observability Services

The following table lists services that are used for UDR benchmark tests. These services fetch UDR metrics, alerts, logs, and traces. For more information about mentioned software, see *Oracle Communications Cloud Native Core, Unified Data Repository Installation, Upgrade, and Fault Recovery Guide*

Table 2-1 Observability Services

Service
Opensearch
Fluentd
Kibana
Prometheus
Grafana
Jaeger

Cloud Native Orchestrator

Kubernetes is used for managing application pods across the cluster.

cnDBTier

cnDBTier is used for performing benchmark tests.

For more information about above mentioned components, see *Oracle Communications Cloud Native Core, Unified Data Repository Installation, Upgrade, and Fault Recovery Guide*.

2.2 Deployment Resources

The performance and capacity of UDR can vary based on the chosen environment and how UDR is deployed. This section provides information about CNE resources used to perform benchmark tests.

2.2.1 Resource Requirements for CNE Observability Services

The following table provides information about number of pods required by each CNE service.

Table 2-2 Resource Requirements for CNE Observability Services

Service Name	Number of Pods
Prometheus Server	1
Prometheus-pushgateway	1
Alert Manager	2
Fluentd	1 per Worker node
Prom-node-exporter	1 per Worker node
MetalLB speaker	1 per Worker node
Opensearch Data/Master	3/3
Opensearch Client	1
Grafana	1
Kibana	1
kube-state-metrics	1
jaeger-agent	1 per Worker node
jaeger-collector	1
jaeger-query	1
rook-ceph-osd	1 for each raw disk available to OS on all Worker nodes
rook-ceph-mgr	1
rook-ceph-mon	3
rook-ceph-osd	1

3

UDR Benchmark Testing

This chapter describes UDR, SLF, and EIR test scenarios.

3.1 Test Scenario 1: SLF Call Deployment Model

This section provides information about SLF call deployment model test scenarios.

3.1.1 SLF Call Model: 34K TPS and 1.44K Provisioning TPS

This test scenario describes performance and capacity of SLF functionality offered by UDR and provides the benchmarking results for various deployment sizes.

The following features are enabled for this testcase:

- Support for Default Group ID in SLF
- Oauth2.0
- Subscriber Activity Logging
- Support for LCI and OCI Header
- Overload Handling
- Support for User-Agent Header
- Alternate Route Service

You can perform benchmark tests on UDR/SLF for compute and storage resources by considering the following conditions:

- Signaling (SLF Look Up): 34K TPS
- Provisioning: 1.44K TPS
- Total Subscribers: 50M

The following table describes the benchmarking parameters and their values:

Table 3-1 Traffic Model Details

Request Type	Details	TPS
Lookup 34K	SLF Lookup GET Requests	34K
Provisioning (1.44k using Provisioning Gateway one site)	CREATE	216
	DELETE	216
	UPDATE	504
	GET	504

The following table describes the testcase parameters and their values:

Table 3-2 Testcase Parameters

Input Parameter Details	Configuration Values
UDR Version Tag	25.1.100
Target TPS	34K Lookup + 1.44K Provisioning
Traffic Profile	SLF 34K Profile
UDR Response Timeout	2.7s
Client Timeout	10s
Signaling Requests Latency Recorded on Client	17ms
Provisioning Requests Latency Recorded on Client	45ms

The following table describes consolidated resource requirement and their utilization:

Table 3-3 Consolidated Resource Requirement

Resource	CPU	Memory	Ephemeral Storage	PVC
cnDBTier	134	495 GB	22 GB	640 GB
SLF	247	152 GB	38 GB	NA
ProvGw	42	30 GB	10 GB	NA
Buffer	50	50 GB	20 GB	200 GB
Total	473	739 GB	90 GB	840 GB

Note

All values are inclusive of ASM sidecar.

The following table describes cnDBTier1 resources and their utilization:

Note

- The same resources and usage are applicable for cnDBTier2
- For cnDBTier, you must use `ocudr_slf_37msub_dbtier` and `ocudr_udr_10msub_dbtier` custom value files for SLF and UDR respectively. For more information, see *Oracle Communications Cloud Native Core, Unified Data Repository Installation, Upgrade, and Fault Recovery Guide*.

Table 3-4 cnDBTier Resources and Usage

Microservice Name	Container Name	Number of Pods	CPU Allocation Per Pod (cnDBTier 1)	Memory Allocation Per Pod (cnDBTier 1)	Ephemeral Storage Per Pod	PVC Allocation Per Pod	Total Resources (cnDBTier)
Management node (ndbmgmd)	mysqlndbcluster	2	2 CPUs	9 GB	1 GB	16 GB	6 CPUs 26 GB
	istio-proxy		1 CPUs	4 GB			Ephemeral Storage: 2 GB PVC Allocation: 32 GB
Data node (ndbmtd)	mysqlndbcluster	6	4 CPUs	50 GB	1 GB	25 GB (Backup: 56 GB)	42 CPUs 336 GB
	istio-proxy		2 CPUs	4 GB			Ephemeral Storage: 6 GB
	db-backup-executor-svc		1 CPU	1 GB			PVC Allocation: 486 GB Data Memory: 25 GB
APP SQL node (ndbappmysqld)	mysqlndbcluster	9	4 CPUs	4 GB	1 GB	10 GB	63 CPUs 72 GB
	istio-proxy		3 CPUs	4 GB			Ephemeral Storage: 9 GB PVC Allocation: 90 GB
SQL node (Used for Replication) (ndbmysqld)	mysqlndbcluster	2	4 CPUs	16 GB	1 GB	16 GB	13 CPUs 41 GB
	istio-proxy		2 CPUs	4 GB			Ephemeral Storage: 2 GB
	init-sidecar		100m CPU	256 MB			PVC Allocation: 32 GB
DB Monitor Service (db-monitor-svc)	db-monitor-svc	1	4 CPUs	4 GB	1 GB	NA	5 CPUs 5 GB
	istio-proxy		1 CPUs	1 GB			Ephemeral Storage: 1 GB
DB Backup Manager Service (backup-manager-svc)	backup-manager-svc	1	100m CPU	128 MB	1 GB	NA	2 CPUs 2 GB
	istio-proxy		1 CPU	1 GB			Ephemeral Storage: 1 GB
Replication Service (db-replication-svc)	db-replication-svc	1	2 CPU	2 GB	1 GB	160 GB	3 CPUs 13 GB

Table 3-4 (Cont.) cnDBTier Resources and Usage

Microservice Name	Container Name	Number of Pods	CPU Allocation Per Pod (cnDBTier 1)	Memory Allocation Per Pod (cnDBTier 1)	Ephemeral Storage Per Pod	PVC Allocation Per Pod	Total Resources (cnDBTier 1)
replication-svc)	istio-proxy		200m CPU	500MB			Ephemeral Storage: 1 GB

Additional cnDBTier configuration are as follows:

```

ndb:
  annotations:
    - sidecar.istio.io/inject: "true"
    - proxy.istio.io/config: "{concurrency: 8}"
    - sidecar.istio.io/proxyCPU: "2000m"
    - sidecar.istio.io/proxyCPULimit: "2000m"
    - sidecar.istio.io/proxyMemory: "4Gi"
    - sidecar.istio.io/proxyMemoryLimit: "4Gi"

mgm:
  annotations:
    - sidecar.istio.io/inject: "true"
    - proxy.istio.io/config: "{concurrency: 8}"
    - sidecar.istio.io/proxyCPU: "1000m"
    - sidecar.istio.io/proxyCPULimit: "1000m"
    - sidecar.istio.io/proxyMemory: "4Gi"
    - sidecar.istio.io/proxyMemoryLimit: "4Gi"

api:
  annotations:
    - sidecar.istio.io/inject: "true"
    - proxy.istio.io/config: "{concurrency: 8}"
    - sidecar.istio.io/proxyCPU: "2000m"
    - sidecar.istio.io/proxyCPULimit: "2000m"
    - sidecar.istio.io/proxyMemory: "4Gi"
    - sidecar.istio.io/proxyMemoryLimit: "4Gi"

ndbapp:
  annotations:
    - sidecar.istio.io/inject: "true"
    - proxy.istio.io/config: "{concurrency: 8}"
    - sidecar.istio.io/proxyCPU: "3000m"
    - sidecar.istio.io/proxyCPULimit: "3000m"
    - sidecar.istio.io/proxyMemory: "4Gi"
    - sidecar.istio.io/proxyMemoryLimit: "4Gi"

```

The following table describes SLF resources and their utilization for Site1 (Lookup Latency: 10ms):

Table 3-5 SLF Resources and Usage

Microservice name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Total Resources
Ingress-gateway-sig	ingressgateway-sig	11	6 CPUs	4 GB	110 CPUs 55 GB Memory Ephemeral Storage: 11 GB
	istio-proxy		4 CPUs	1 GB	
Ingress-gateway-prov	ingressgateway-prov	2	4 CPUs	4 GB	12 CPUs 10 GB Ephemeral Storage: 2 GB
	istio-proxy		2 CPUs	1 GB	
Nudr-dr-service	nudr-dr-service	9	6 CPUs	4 GB	81 CPUs 45 GB Ephemeral Storage: 9 GB
	istio-proxy		3 CPUs	1 GB	
Nudr-dr-provservice	nudr-dr-provservice	2	4 CPUs	4 GB	12 CPUs 10 GB Ephemeral Storage: 2 GB
	istio-proxy		2 CPUs	1 GB	
Nudr-nrf-client-nfmanagement	nrf-client-nfmanagement	2	1 CPU	1 GB	4 CPUs 4 GB Ephemeral Storage: 2 GB
	istio-proxy		1 CPUs	1 GB	
Nudr-egress-gateway	egressgateway	2	1 CPUs	1 GB	4 CPUs 4 GB Ephemeral Storage: 2 GB
	istio-proxy		1 CPUs	1 GB	
Nudr-config	nudr-config	2	2 CPUs	2 GB	6 CPUs 6 GB Ephemeral Storage: 2 GB
	istio-proxy		1 CPUs	1 GB	
Nudr-config-server	nudr-config-server	2	2 CPUs	2 GB	6 CPUs 6 GB Ephemeral Storage: 2 GB
	istio-proxy		1 CPUs	1 GB	
alternate-route	alternate-route	2	1 CPUs	1 GB	4 CPUs 4 GB Ephemeral Storage: 2 GB
	istio-proxy		1 CPUs	1 GB	
app-info	app-info	2	1 CPUs	1 GB	4 CPUs 4 GB Ephemeral Storage: 2 GB
	istio-proxy		1 CPUs	1 GB	
perf-info	perf-info	2	1 CPUs	1 GB	4 CPUs 4 GB Ephemeral Storage: 2 GB
	istio-proxy		1 CPUs	1 GB	

Note

The same resources and usage are used for Site2.

The following table describes provision gateway resources and their utilization (Provisioning Latency: 30ms):

Table 3-6 Provision Gateway Resources and Usage

Microservice name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Total Resources
provgw-ingress-gateway	ingressgateway	2	4 CPUs	4 GB	6 CPUs 6 GB Memory Ephemeral Storage: 2 GB
	istio-proxy		1 CPUs	1 GB	
provgw-egress-gateway	egressgateway	2	4 CPUs	4 GB	6 CPUs 6 GB Memory Ephemeral Storage: 2 GB
	istio-proxy		1 CPUs	1 GB	
provgw-service	provgw-service	2	4 CPUs	4 GB	8 CPUs 6 GB Memory Ephemeral Storage: 2 GB
	istio-proxy		1 CPUs	1 GB	
provgw-config	provgw-config	2	2 CPUs	2 GB	6 CPUs 6 GB Memory Ephemeral Storage: 2 GB
	istio-proxy		1 CPUs	1 GB	
provgw-config-server	provgw-config-server	2	2 CPUs	2 GB	6 CPUs 6 GB Memory Ephemeral Storage: 2 GB
	istio-proxy		1 CPUs	1 GB	

The following table provides observation data for the performance test that can be used for the benchmark testing to scale up SLF performance:

Table 3-7 Result and Observation

Parameter	Values
Test Duration	24hr
TPS Achieved	34K SLF Lookup + 1.44k Provisioning
Success Rate	100%
Average SLF processing time (Request and Response)	26ms

3.1.2 SLF Call Model: 50K lookup + 1.44K Provisioning TPS

This test scenario describes performance and capacity of SLF functionality offered by UDR and provides the benchmarking results for various deployment sizes.

The following features are enabled for SLF in this testcase:

- OAuth2
- Alternate Routing Service
- Support for User-Agent Header
- Overload Handling
- Support for LCI and OCI Header
- Auto Create
- Network Function Scoring for a Site
- Ingress Gateway Pod Protection

The following features are enabled for Provisioning Gateway in this testcase:

- Auditor Service
- Provgw global configuration

You can perform benchmark tests on SLF for compute and storage resources by considering the following conditions:

- Signaling (SLF Look Up): 50K TPS
- Provisioning: 144 TPS
- Total Subscribers: 64M
- Profile Size: 450 bytes

The following table describes the benchmarking parameters and their values:

Table 3-8 Traffic Model Details

Request Type	Details	TPS
Lookup 50k	SLF Lookup GET Requests	50K
Provisioning (1.44K using Provgw)	CREATE	216
	DELETE	216
	UPDATE	504
	GET	504

The following table describes the testcase parameters and their values:

Table 3-9 Testcase Parameters

Input Parameter Details	Configuration Values
UDR Version Tag	25.1.100
Target TPS	50K Lookup + 1.44K Provisioning
Traffic Profile	SLF 50K Profile
Notification Rate	OFF
UDR Response Timeout	900ms
Client Timeout	30s
Signaling Requests Latency Recorded on Client	19ms
Provisioning Requests Latency Recorded on Client	42ms

The following table describes consolidated resource requirement and their utilization:

Table 3-10 Consolidated Resource Requirement

Resource	CPU	Memory	Ephemeral Storage	PVC
cnDBTier	134	453 GB	20 GB	1064 GB
SLF	384	225 GB	53 GB	NA
ProvGw	45	45 GB	11 GB	NA
Buffer	50	50 GB	50 GB	50 GB
Total	613	773 GB	134 GB	1114 GB

Note

All values are inclusive of ASM sidecar.

Table 3-11 cnDBTier Resources and Usage

Microservice Name	Container Name	Number of Pods	CPU Allocation Per Pod (cnDBtier1)	Memory Allocation Per Pod (cnDBtier1)	Ephemeral Storage Per Pod	PVC Allocation Per Pod	Total Resources (cnDBtier)
Management node (ndbmcmd)	mysqlndbcluster	2	2 CPUs	12 GB	1 GB	16 GB	6 CPUs 26 GB Ephemeral Storage: 2 GB PVC Allocation: 32 GB
	istio-proxy		1 CPUs	1 GB			
Data node (ndbmt)	mysqlndbcluster	6	4 CPUs	50 GB	1 GB	65 GB (Backup: 63 GB)	42 CPUs 324 GB Ephemeral Storage: 6 GB PVC Allocation: 768 GB
	istio-proxy		2 CPUs	2 GB			
	db-backup-executor-svc		1 CPU	2 GB			
APP SQL node (ndbappmysqld)	mysqlndbcluster	7	6 CPUs	4 GB	1 GB	10 GB	63 CPUs 42 GB Ephemeral Storage: 7 GB PVC Allocation: 70 GB
	istio-proxy		3 CPUs	2 GB			
SQL node (Used for Replication)	mysqlndbcluster	2	4 CPUs	16 GB	1 GB	16 GB	13 CPUs 41 GB Ephemeral Storage: 2 GB
	istio-proxy		2 CPUs	4 GB			

Table 3-11 (Cont.) cnDBTier Resources and Usage

Microservice Name	Container Name	Number of Pods	CPU Allocation Per Pod (cnDBTier1)	Memory Allocation Per Pod (cnDBTier1)	Ephemeral Storage Per Pod	PVC Allocation Per Pod	Total Resources (cnDBTier)
(ndbmysqld)	init-sidecar		100m CPU	256 MB			PVC Allocation: 32 GB
DB Monitor Service (db-monitor-svc)	db-monitor-svc	1	4 CPUs	4 GB	1 GB	NA	5 CPUs 5 GB
	istio-proxy		1 CPUs	1 GB			Ephemeral Storage: 1 GB
DB Backup Manager Service (backup-manager-svc)	backup-manager-svc	1	1 CPU	1 GB	1 GB	NA	2 CPUs 2 GB
	istio-proxy		1 CPUs	1 GB			Ephemeral Storage: 1 GB
Replication Service (db-replication-svc)	db-replication-svc	1	2 CPU	12 GB	1 GB	160 GB	3 CPUs 13 GB
	istio-proxy		200m CPU	500 MB			Ephemeral Storage: 1 GB PVC Allocation: 160 GB

The following table describes SLF resources and their utilization for Site1 (Lookup Latency: 19ms):

Table 3-12 SLF Resources and Usage

Microservice name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Ephemeral Storage Per Pod	Total Resources
Ingress-gateway-sig	ingressgateway-sig	19	6 CPUs	4 GB	1 GB	190 CPUs 95 GB
	istio-proxy		4 CPUs	1 GB		Memory Ephemeral Storage: 19 GB
Ingress-gateway-prov	ingressgateway-prov	2	4 CPUs	4 GB	1 GB	12 CPUs 10 GB
	istio-proxy		2 CPUs	1 GB		Ephemeral Storage: 2 GB
Nudr-dr-service	nudr-dr-service	15	6 CPUs	4 GB	1 GB	135 CPUs 75 GB

Table 3-12 (Cont.) SLF Resources and Usage

Microservice name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Ephemeral Storage Per Pod	Total Resources
	istio-proxy		3 CPUs	1 GB		Ephemeral Storage: 15 GB
Nudr-dr-provservice	nudr-dr-provservice	2	4 CPUs	4 GB	1 GB	12 CPUs 10 GB
	istio-proxy		2 CPUs	1 GB		Ephemeral Storage: 2 GB
Nudr-nrf-client-nfmanagement	nrf-client-nfmanagement	2	1 CPU	1 GB	1 GB	4 CPUs 4 GB
	istio-proxy		1 CPUs	1 GB		Ephemeral Storage: 2 GB
Nudr-egress-gateway	egressgateway	2	1 CPUs	1 GB	1 GB	4 CPUs 4 GB
	istio-proxy		1 CPUs	1 GB		Ephemeral Storage: 2 GB
Nudr-config	nudr-config	2	2 CPUs	2 GB	1 GB	6 CPUs 6 GB
	istio-proxy		1 CPUs	1 GB		Ephemeral Storage: 2 GB
Nudr-config-server	nudr-config-server	2	2 CPUs	2 GB	1 GB	6 CPUs 6 GB
	istio-proxy		1 CPUs	1 GB		Ephemeral Storage: 2 GB
alternate-route	alternate-route	2	1 CPUs	1 GB	1 GB	4 CPUs 4 GB
	istio-proxy		1 CPUs	1 GB		Ephemeral Storage: 2 GB
app-info	app-info	2	1 CPUs	1 GB	1 GB	4 CPUs 4 GB
	istio-proxy		1 CPUs	1 GB		Ephemeral Storage: 2 GB
perf-info	perf-info	2	1 CPUs	1 GB	1 GB	4 CPUs 4 GB
	istio-proxy		1 CPUs	1 GB		Ephemeral Storage: 2 GB
Nudr-dbcrauditor	nudr-dbcrauditor-service	1	2 CPUs	2 GB	1 GB	3 CPUs 3 GB

Table 3-12 (Cont.) SLF Resources and Usage

Microservice name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Ephemeral Storage Per Pod	Total Resources
	istio-proxy		1 CPUs	1 GB		Ephemeral Storage: 1 GB

Note

The same resources and usage are used for Site2.

Table 3-13 Provision Gateway Resources and their utilization

Microservice name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Ephemeral Storage Per Pod	Total Resources
provgw-ingress-gateway	ingressgateway	2	4 CPUs	4 GB	1 GB	10 CPUs 10 GB Memory Ephemeral Storage: 2 GB
	istio-proxy		1 CPUs	1 GB		
provgw-egress-gateway	egressgateway	2	4 CPUs	4 GB	1 GB	10 CPUs 10 GB Memory Ephemeral Storage: 2 GB
	istio-proxy		1 CPUs	1 GB		
provgw-service	provgw-service	2	4 CPUs	4 GB	1 GB	10 CPUs 10 GB Memory Ephemeral Storage: 2 GB
	istio-proxy		1 CPUs	1 GB		
provgw-config	provgw-config	2	2 CPUs	2 GB	1 GB	6 CPUs 6 GB Memory Ephemeral Storage: 2 GB
	istio-proxy		1 CPUs	1 GB		
provgw-config-server	provgw-config-server	2	2 CPUs	2 GB	1 GB	6 CPUs 6 GB Memory Ephemeral Storage: 2 GB
	istio-proxy		1 CPUs	1 GB		
provgw-auditor-service	auditor-service	1	2 CPUs	2 GB	1 GB	3 CPUs 3 GB Memory

Table 3-13 (Cont.) Provision Gateway Resources and their utilization

Microservice name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Ephemeral Storage Per Pod	Total Resources
	istio-proxy		1 CPU	1 GB		Ephemeral Storage: 1 GB

The following table provides observation data for the performance test that can be used for the benchmark testing to scale up SLF performance:

Table 3-14 Result and Observation

Parameter	Values
Test Duration	24hr
TPS Achieved	50K SLF Lookup + 1.44K Provisioning
Success Rate	100%
Average SLF processing time for signaling requests	19ms
Average SLF processing time for provisioning requests	42ms

3.2 Test Scenario 2: EIR 10k TPS and 10k Diameter S13 Interface TPS

This test scenario describes performance and capacity improvements of EIR functionality offered by UDR and provides the benchmarking results for various deployment sizes.

The following features are enabled for this testcase:

- Overload Handling
- Ingress Gateway Pod Protection
- Network Policy
- Diameter Gateway Pod Congestion Control

EIR is benchmarked for compute and storage resources under following conditions:

- EIR Look Up: 20k
- Total Subscribers: 1M
- Profile Size: 130 bytes

The following table describes the benchmarking parameters and their values:

Table 3-15 Traffic Model Details

Request Type	Details	TPS
EIR GET	N17 GET Request	10k
ECR message	Diameter S13 Interface ECR	10k

The following table describes the testcase parameters and their values:

Table 3-16 Testcase Parameters

Input Parameter Details	Configuration Values
UDR Version Tag	24.3.0
Target TPS	20k Lookup
Traffic Profile	20k
EIR Response Timeout	2.7s
Client Timeout	10s
N17 Latency:	6.2 ms
S13 Latency	11 ms

The following table describes cnDBTier resources and their utilization:

Table 3-17 cnDBTier Resources and their Utilization

Micro service name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod (cnDBTier1)	Total Resources (cnDBTier1)
Management node	mysqlIndbcluster	2	2 CPUs	11.25 GB	4 CPU 23 GB Memory Ephemeral Storage: 2 GB PVC Allocation: 32 GB
Data node	mysqlIndbcluster	4	4 CPUs	33 GB	16 CPU 132 GB Memory Ephemeral Storage: 4 GB PVC Allocation: 324 GB
APP SQL node	mysqlIndbcluster	5	4 CPUs	4 GB	20 CPU 20 GB Memory Ephemeral Storage: 5 GB PVC Allocation: 50 GB
SQL node (Used for Replication)	mysqlIndbcluster	2	4 CPUs	16 GB	8 CPU 32 GB Memory Ephemeral Storage: 2 GB PVC Allocation: 32 GB

Table 3-17 (Cont.) cnDBTier Resources and their Utilization

Micro service name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod (cnDBTier1)	Total Resources (cnDBTier1)
DB Monitor Service (db-monitor-svc)	db-monitor-svc	1	4 CPUs	4 GB	4 CPUs 4 GB Memory Ephemeral Storage: 1 GB
DB Backup Manager Service (backup-manager-svc)	backup-manager-svc	1	100m CPUs	128 MB	100m CPUs 128 MB Memory Ephemeral Storage: 1 GB
Replication Service (db-replication-svc)	db-replication-svc	1	2 CPU	2 GB	2 CPUs 2 MB Memory Ephemeral Storage: 1 GB

The following table describes EIR resources and their utilization:

Table 3-18 EIR Resources and their Utilization

Micro service name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Ephemeral Storage Per Pod	Total Resources
Ingress-gateway-sig	Ingress-gateway-sig	4	6 CPUs	4 GB	1 GB	24 CPUs 16 GB Memory Ephemeral Storage: 4 GB
Ingress-gateway-prov	Ingress-gateway-prov	2	4 CPUs	4 GB	1 GB	8 CPUs 8 GB Memory Ephemeral Storage: 2 GB
Nudr-dr-service	nudr-dr-service	3	6 CPUs	4 GB	1 GB	18 CPUs 12 GB Memory Ephemeral Storage: 3 GB
Nudr-dr-provservice	nudr-dr-provservice	2	4 CPUs	4 GB	1 GB	8 CPUs 8 GB Memory Ephemeral Storage: 2 GB

Table 3-18 (Cont.) EIR Resources and their Utilization

Micro service name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Ephemeral Storage Per Pod	Total Resources
Nudr-diam-gateway	nudr-diam-gateway	2	6 CPUs	4 GB	1 GB	12 CPUs 8 GB Memory Ephemeral Storage: 2 GB
Nudr-diameterproxy	nudr-diameterproxy	8	6 CPUs	4 GB	1 GB	48 CPUs 32 GB Memory Ephemeral Storage: 8 GB
Nudr-config	nudr-config	2	1 CPUs	1 GB	1 GB	2 CPUs 2 GB Memory Ephemeral Storage: 2 GB
Nudr-config-server	nudr-config-server	2	1 CPUs	1 GB	1 GB	2 CPU 2 GB Memory Ephemeral Storage: 2 GB
Alternate-route	alternate-route	2	1 CPUs	1 GB	1 GB	2 CPU 2 GB Memory Ephemeral Storage: 2 GB
Nudr-nrf-client-nfmanagement-service	nrf-client-nfmanagement	2	1 CPUs	1 GB	1 GB	2 CPU 2 GB Memory Ephemeral Storage: 2 GB
App-info	app-info	2	1 CPUs	1 GB	1 GB	2 CPU 2 GB Memory Ephemeral Storage: 2 GB

Table 3-18 (Cont.) EIR Resources and their Utilization

Micro service name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Ephemeral Storage Per Pod	Total Resources
Perf-info	perf-info	2	1 CPUs	1 GB	1 GB	2 CPU 2 GB Memory Ephemeral Storage: 2 GB
Nudr-dbcrauditor-service	nudr-dbcrauditor-service	1	1 CPUs	1 GB	1 GB	1 CPU 1 GB Memory Ephemeral Storage: 1 GB

The following table provides observation data for the performance test that can be used for the benchmark testing to scale up EIR performance:

Table 3-19 Result and Observation

Parameter	Values
Test Duration	12hrs
TPS Achieved	20k
Success Rate	100%
Average EIR processing time (Request and Response)	9 ms

3.3 Test Scenario 3: SOAP and Diameter Deployment Model

2K SOAP provisioning TPS for ProvGw for Medium profile + Diameter 25K with Large profile

The following features are disabled for this testcase:


- TLS
- OAuth2.0
- Header Validations like XFCC, server header, and user agent header

UDR is benchmarked for compute and storage resources under following conditions:

- Signaling : 10K TPS
- Provisioning: 2K TPS
- Total Subscribers: 1M - 10M range used for Diameter Sh and 1M range used for SOAP/XML
- Profile Size: 2.2KB
- Average HTTP Provisioning Request Packet Size: NA

- Average HTTP Provisioning Response Packet Size: NA

Figure 3-1 SOAP and Diameter Deployment Model

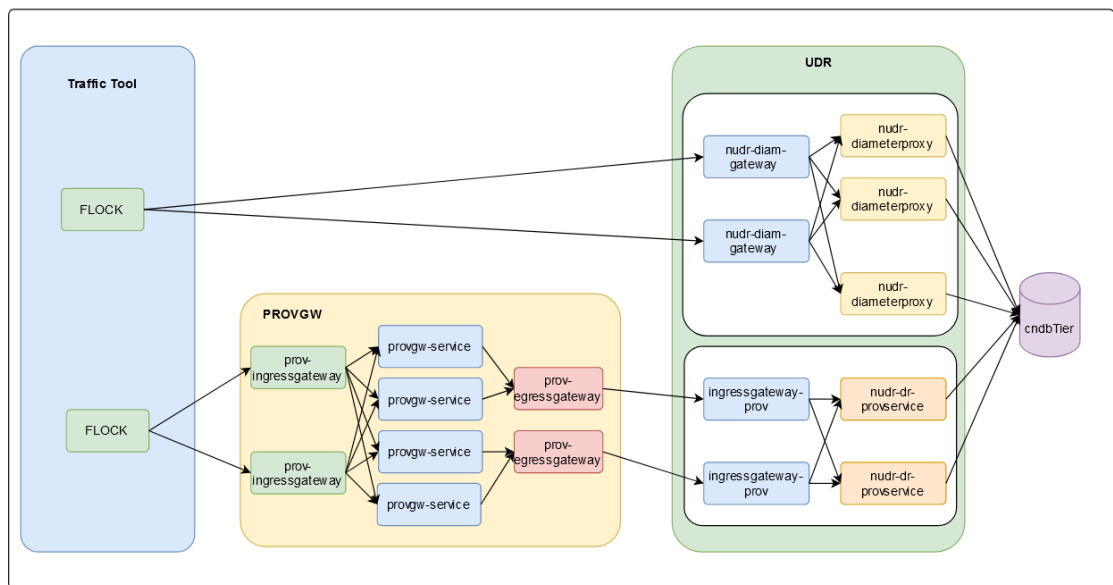

The following table describes the benchmarking parameters and their values:

Table 3-20 Traffic Model Details

Request Type	Details	TPS
Diameter SH Traffic	SH Traffic	25K
Provisioning (2K using Provgw)	SOAP Traffic	2K

Table 3-21 SOAP Traffic Model

Request Type	SOAP Traffic %
GET	33%
DELETE	11%
POST	11%
PUT	45%

Table 3-22 Diameter Traffic Model

Request Type	Diameter Traffic %
SNR	25%
PUR	50%
UDR	25%

The following table describes the benchmarking parameters and their values:

Table 3-23 Testcase Parameters

Input Parameter Details	Configuration Values
UDR Version Tag	22.2.0
Target TPS	25K + 2K
Traffic Profile	25K sh + 2K SOAP
Notification Rate	OFF
UDR Response Timeout	5s
Client timeout	10s
Signaling Requests Latency Recorded on Client	NA
Provisioning Requests Latency Recorded on Client	NA

Note

PNR scenarios are not tested because server stub is not used.

The following table describes cnDBTier resources and their utilization:

Table 3-24 cnDBTier Resources and their Utilization

Micro service name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Total Resources	CPU Usage	Memory Usage
Management node	mysqlndbcluster	3	4 CPUs	10 GB	12 CPUs 30 GB Memory	0.2 CPU/pod	.2 GB/pod
Data node	mysqlndbcluster	4	15 CPUs	98 GB	64 CPU 408 GB Memory	5.8 CPU/pod	92 GB/pod
	db-backup-executor-svc		100m CPU	128 MB		NA	NA
APP SQL node	mysqlndbcluster	4	16 CPUs	16 GB	64 CPUs 64 GB Memory	9.5 CPU/pod	8.8 GB/pod
SQL node (Used for Replication)	mysqlndbcluster	4	8 CPUs	16 GB	49 CPUs 81 GB Memory	Utilization data is not available for this service because of resource constraints, pods are not used.	
DB Monitor Service	db-monitor-svc	1	200m CPUs	500 MB	3 CPUs 2 GB Memory	Minimal resources are used. Utilization is not captured	
DB Backup Manager Service	replication-svc	1	200m CPU	500 MB	3 CPUs 2 GB Memory	Minimal resources are used. Utilization is not captured	

cnDBTier Usage

Results for Kubectl top pods on cndbtier is shown below:

NAME	CPU (cores)	MEMORY (bytes)
mysql-cluster-db-backup-manager-svc-5f9956c869-44r9p	1m	41Mi
mysql-cluster-db-monitor-svc-74568b68c6-bgznr	2m	235Mi
ndbappmysqld-0	9518m	8827Mi
ndbappmysqld-1	9856m	8809Mi
ndbappmysqld-2	9874m	8811Mi
ndbappmysqld-3	8961m	8805Mi
ndbmcmd-0	8m	2064Mi
ndbmcmd-1	8m	2062Mi
ndbmcmd-2	8m	2065Mi
ndbmttd-0	5768m	92317Mi
ndbmttd-1	5526m	92312Mi
ndbmttd-2	6031m	92331Mi
ndbmttd-3	5788m	92317Mi

Results for Kubectl get hpa on cndbtier is shown below:

NAME	REFERENCE	TARGETS	MINPODS	MAXPODS	REPLICAS	AGE
ndbappmysqld	StatefulSet/ndbappmysqld	59%/80%	4	4	4	10d
ndbmcmd	StatefulSet/ndbmcmd	0%/80%	3	3	3	10d
ndbmttd	StatefulSet/ndbmttd	38%/80%	4	4	4	10d

cnDBTier Metrics:

- Data memory usage: 72GB (5.164GB used)
- DB Reads per second: 52k
- DB Writes per second: 24k

The following table describes UDR resources and their utilization:

Table 3-25 UDR Resources and their Utilization (Request Latency: 40ms)

Micro service name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Total Resources	CPU Usage	Memory Usage
nudr-diameterproxy	nudr-diameterproxy	19	2.5 CPUs	4 GB	47.5 CPUs 76 GB Memory	1.75 CPU/pod	1 GB/pod
nudr-diametergateway	nudr-diametergateway	3	6 CPUs	4 GB	18 CPUs 12 GB Memory	.25 CPU/pod	2 GB/pod
Ingress-gateway-sig	ingressgateway-sig	2	2 CPUs	2 GB	4 CPUs 4 GB Memory	Minimal resources are used. Utilization is not captured	
Ingress-gateway-prov	ingressgateway-prov	2	2 CPUs	2 GB	4 CPUs 4 GB Memory	1 CPU/pod	1 GB/pod
Nudr-dr-service	nudr-dr-service	2	2 CPUs	2 GB	4 CPUs 4 GB Memory	Minimal resources are used. Utilization is not captured	
Nudr-dr-provservice	nudr-dr-provservice	2	2 CPUs	2 GB	4 CPUs 4 GB Memory	1.4 CPU/pod	1 GB/pod

Table 3-25 (Cont.) UDR Resources and their Utilization (Request Latency: 40ms)

Micro service name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Total Resources	CPU Usage	Memory Usage
Nudr-nrf-client-nfmanagement	nrf-client-nfmanagement	2	1 CPUs	1 GB	2 CPUs 2 GB Memory	Minimal resources are used. Utilization is not captured	
Nudr-egress-gateway	egressgateway	2	2 CPUs	2 GB	4 CPU 4 GB Memory	Minimal resources are used. Usage is not captured	
Nudr-config	nudr-config	2	1 CPUs	1 GB	2 CPU 2 GB Memory	Minimal resources are used. Utilization is not captured	
Nudr-config-server	nudr-config-server	2	1 CPUs	1 GB	2 CPU 2 GB Memory	Minimal resources are used. Utilization is not captured	
alternate-route	alternate-route	2	1 CPUs	1 GB	2 CPU 2 GB Memory	Minimal resources are used. Usage is not captured	
app-info	app-info	2	1 CPUs	1 GB	2 CPU 2 GB Memory	Minimal resources are used. Utilization is not captured	
perf-info	perf-info	2	1 CPUs	1 GB	2 CPU 2 GB Memory	Minimal resources are used. Usage is not captured	

Resource Utilization

Diameter resource utilization is shown below:

ocudr-nudr-diam-gateway-0	2463m	1958Mi
ocudr-nudr-diam-gateway-1	2474m	1747Mi
ocudr-nudr-diam-gateway-2	2453m	1754Mi
ocudr-nudr-diameterproxy-b5c5f55b8-4vglt	1679m	984Mi
ocudr-nudr-diameterproxy-b5c5f55b8-5x94d	1688m	1095Mi
ocudr-nudr-diameterproxy-b5c5f55b8-8f7xg	1818m	1078Mi
ocudr-nudr-diameterproxy-b5c5f55b8-8kbgs	1789m	796Mi
ocudr-nudr-diameterproxy-b5c5f55b8-8wwhv	1845m	781Mi
ocudr-nudr-diameterproxy-b5c5f55b8-bwpzw	1719m	908Mi
ocudr-nudr-diameterproxy-b5c5f55b8-c8nk6	1690m	1054Mi
ocudr-nudr-diameterproxy-b5c5f55b8-cjlvq	1662m	983Mi
ocudr-nudr-diameterproxy-b5c5f55b8-dfkq4	1755m	983Mi
ocudr-nudr-diameterproxy-b5c5f55b8-fqjkw	1761m	979Mi
ocudr-nudr-diameterproxy-b5c5f55b8-gmpfn	1684m	865Mi
ocudr-nudr-diameterproxy-b5c5f55b8-hvmzk	1776m	907Mi
ocudr-nudr-diameterproxy-b5c5f55b8-q5qsp	1763m	863Mi
ocudr-nudr-diameterproxy-b5c5f55b8-qd5w2	1799m	996Mi
ocudr-nudr-diameterproxy-b5c5f55b8-qnkk5	1735m	945Mi
ocudr-nudr-diameterproxy-b5c5f55b8-rlm7k	1789m	811Mi
ocudr-nudr-diameterproxy-b5c5f55b8-tpqhf	1681m	964Mi
ocudr-nudr-diameterproxy-b5c5f55b8-vfq98	1839m	928Mi
ocudr-nudr-diameterproxy-b5c5f55b8-vtvcb	1795m	845Mi

UDR HPA resource utilization is shown below:

NAME	REFERENCE	TARGETS	MINPODS	MAXPODS	REPLICAS	AGE
ocudr-config-server-hpa	Deployment/ocudr-nudr-config-server	2%/80%	1	2	1	20h
ocudr-egressgateway-vl	Deployment/ocudr-egressgateway	0%/65%	1	4	1	20h
ocudr-ingressgateway-prov-vl	Deployment/ocudr-ingressgateway-prov	43%/65%	2	8	2	20h
ocudr-ingressgateway-sig-vl	Deployment/ocudr-ingressgateway-sig	0%/65%	1	4	1	20h
ocudr-nudr-config	Deployment/ocudr-nudr-config	0%/80%	1	1	1	20h
ocudr-nudr-diameterproxy	Deployment/ocudr-nudr-diameterproxy	70%/80%	19	19	19	20h
ocudr-nudr-dr-provservice	Deployment/ocudr-nudr-dr-provservice	70%/80%	2	2	2	20h
ocudr-nudr-drservice	Deployment/ocudr-nudr-drservice	0%/80%	1	4	1	20h
ocudr-nudr-notify-service	Deployment/ocudr-nudr-notify-service	9%/80%	1	1	1	20h
provgw-config-server-hpa	Deployment/provgw-provgw-config-server	0%/80%	1	2	1	5h24m
provgw-prov-egressgateway-vl	Deployment/provgw-prov-egressgateway	45%/80%	2	4	2	5h24m
provgw-prov-ingressgateway-vl	Deployment/provgw-prov-ingressgateway	64%/80%	2	4	3	5h24m
provgw-provgw-config	Deployment/provgw-provgw-config	0%/80%	1	1	1	5h24m
provgw-provgw-service	Deployment/provgw-provgw-service	72%/80%	4	4	4	5h24m

The following table describes provision gateway resources and their utilization:

Table 3-26 Provision Gateway Resources and their Utilization (Provisioning Request Latency: 40ms)

Micro service name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Total Resources	CPU Usage	Memory Usage
provgw-ingress-gatwa	ingressgateway	3	2 CPUs	2 GB	6 CPUs 6 GB Memory	1.3 CPU/pod	1 GB/pod

Table 3-26 (Cont.) Provision Gateway Resources and their Utilization (Provisioning Request Latency: 40ms)

Micro service name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Total Resources	CPU Usage	Memory Usage
provgw-egress-gateway	egressgateway	2	2 CPUs	2 GB	4 CPUs 4 GB Memory	.0.9 CPU/pod	700 Mi/pod
provgw-service	provgw-service	4	2.5 CPUs	3 GB	10 CPUs 12 GB Memory	1.75 CPU/pod	1 GB/pod
provgw-config	provgw-config	2	1 CPUs	1 GB	2 CPUs 2 GB Memory	Minimal resources are used. Utilization is not captured	
provgw-config-server	provgw-config-server	2	1 CPUs	1 GB	2 CPUs 2 GB Memory	Minimal resources are used. Utilization is not captured	

Provisioning Gateway resource utilization is shown below:

ocudr-ingressgateway-prov-bc567cb6d-jsr7d	874m	666Mi
ocudr-ingressgateway-prov-bc567cb6d-v8lfp	862m	687Mi
ocudr-nudr-dr-provservice-7c855bb68-4bqns	1445m	815Mi
ocudr-nudr-dr-provservice-7c855bb68-gchlt	1348m	828Mi
provgw-prov-egressgateway-745c9d5d7d-bz7ct	921m	738Mi
provgw-prov-egressgateway-745c9d5d7d-xvj2k	904m	710Mi
provgw-prov-ingressgateway-7bd88db949-8qmps	1850m	1263Mi
provgw-prov-ingressgateway-7bd88db949-g7b25	4m	583Mi
provgw-prov-ingressgateway-7bd88db949-wdg4k	2003m	1281Mi
provgw-provgw-config-6fcc86cd78-jlfqr	4m	536Mi
provgw-provgw-config-server-9dff7cf4f-6qwkb	5m	374Mi
provgw-provgw-service-c54d94bcb-q84gl	159m	582Mi
provgw-provgw-service-c54d94bcb-s8kpz	2501m	742Mi
provgw-provgw-service-c54d94bcb-sqwrr	2427m	1191Mi
provgw-provgw-service-c54d94bcb-zttr9	2103m	1082Mi

Resources calculation for UDR, Provisioning Gateway, and cnDbTier are shown below:

Table 3-27 cnUDR and ProvGw Resources Calculation

Resources	cnUDR			ProvGw		
	Core services used for traffic runs (Nudr-diamgw, Nudr-diamproxy, Nudr-ingressgateway-prov and Nudr-dr-prov) at 70% usage	Other Microservices	Total	Core services used for traffic runs (ProvGw-ingressgateway, ProvGw-provgw service and ProvGw-egressgateway) at 70% usage	Other Microservice	Total
CPU	73.5	24	97.5	20	4	24
Memory in GB	96	24	120	22	4	26
Disk Volume (Ephemeral storage) in GB	26	16	42	9	4	13

Table 3-28 cnDbTier Resources Calculation

Resources	cnDbTier					
	SQL nodes (at actual usage)	SQL Nodes (Overhead/ Buffer resources at 20%)	Data nodes (at actual usage)	Data nodes (Overhead/ Buffer resources at 10%)	MGM nodes and other resources (Default resources)	Total
CPU	76	16	23.2	5	18	138.5
Memory in GB	70.4	14	368	36	34	522
Disk Volume (Ephemeral storage) in GB	8	NA	960 (ndbdisksize = 240*4)	NA	20	988

Table 3-29 Total Resources Calculation

Resources	Total
CPU	260
Memory in GB	668 GB
Disk Volume (Ephemeral storage) in GB	104 GB

The following table provides observation data for the performance test that can be used for the benchmark testing to scale up UDR performance:

Table 3-30 Result and Observation

Parameter	Values
Test Duration	18hr

Table 3-30 (Cont.) Result and Observation

Parameter	Values
TPS Achieved	10K
Success Rate	100%
Average UDR processing time (Request and Response)	40ms

3.4 Test Scenario 4: Policy Data Traffic Deployment Model

This section provides information about policy data traffic deployment model test scenarios.

3.4.1 Policy Data: 17.2K N36, 300 TPS Notifications and 500 TPS Provisioning

You can perform benchmark tests on UDR for compute and storage resources by considering the following conditions:

- Signaling : 17.2K
- Provisioning: 500 TPS
- Total Subscribers: 10M

The following table describes the benchmarking parameters and their values:

Table 3-31 Traffic Model Details

Request Type	Details	TPS
N36 traffic (100%) 17.2K TPS for sm-data and subs-to-notify POST/DELETE	subs-to-notify POST	3K (17.45%)
	sm-data GET	4.7K (27.3%)
	subs-to-notify DELETE	3K (17.45%)
	sm-data PATCH	6.5K (37.8%)
500 TPS PROVISIONING Policy Data PUT Operation	UPDATE	300 (60%)
	GET	100 (40%)
	CREATE	50 (10%)
	DELETE	50 (10%)
NOTIFICATIONS (triggered from 300 PUT provisioning traffic)	POST Operation (Egress)	300

The following table describes the test case parameters and their values:

Table 3-32 Testcase Parameters

Input Parameter Details	Configuration Values
UDR Version Tag	24.2.0
Target TPS	17.2K Signaling
Notification Rate	300
UDR Response Timeout	2700ms

Table 3-32 (Cont.) Testcase Parameters

Input Parameter Details	Configuration Values
Signaling Requests Latency Recorded on Client	19ms
Provisioning Requests Latency Recorded on Client	24ms

Table 3-33 Consolidated Resource Requirement

Resource	CPU	Memory	Ephemeral Storage	PVC
cnDBTier	92 CPUs	485 GB	21 GB	1404 GB
UDR	215 CPUs	156 GB	48 GB	NA
Buffer	50 CPUs	50 GB	20 GB	200 GB
Total	357 CPUs	691 GB	89 GB	1604 GB

The following table describes cnDBTier resources and their utilization:

Table 3-34 cnDBTier Resources and their Utilization

Microservice name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Ephemeral Storage Per Pod	PVC Allocation Per Pod	Total Resources	PVC Usage
Management node (ndbmngmd)	mysqlndb cluster	2	2 CPUs	9 GB	1 GB	15 GB	4 CPUs 18 GB Ephemeral Storage: 2 GB PVC Allocation: 30 GB	70 MB/pod
Data node (ndbmtd)	mysqlndb cluster	4	4 CPUs	93 GB	1 GB	132 GB Backup: 164 GB	16 CPUs 372 GB Ephemeral Storage: 4 GB PVC Allocation: 1184 GB	33 GB/pod
APP SQL node (ndbappmysql)	mysqlndb cluster	10	6 CPUs	4 GB	1 GB	2 GB	60 CPUs 40 GB Ephemeral Storage: 10 GB PVC Allocation: 20 GB	200 MB/pod

Table 3-34 (Cont.) cnDBTier Resources and their Utilization

Microservice name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Ephemeral Storage Per Pod	PVC Allocation Per Pod	Total Resources	PVC Usage
SQL node (ndbmysqld, used for replication)	mysqlndb cluster	2	4 CPUs	24 GB	1 GB	13 GB	8 CPUs 48 GB Ephemeral Storage: 2 GB PVC Allocation: 26 GB	2 GB/pod
DB Monitor Service	db-monitor-svc	1	4 CPUs	4 GB	1 GB	NA	4 CPU 4 MB Ephemeral Storage: 1 GB	Minimal resources used
DB Backup Manager Service	backup-manager-svc	1	100 millicores CPUs	128 MB	1 GB	NA	1 CPU 128 MB Ephemeral Storage: 1 GB	Minimal resources used
Replication service (Multi site cases)	replication-svc	1	2 CPUs	2 GB	1 GB	143 GB	2 CPUs 2 GB Ephemeral Storage: 1 GB PVC Allocation: 143 GB	NA

The following table describes UDR resources and their utilization:

Table 3-35 UDR Resources and their Utilization (Average Latency: 19ms for N36 and 24ms for Provisioning)

Microservice name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Ephemeral Storage Per Pod	Total Resources
Ingress-gateway-sig	ingressgateway-sig	9	6 CPUs	4 GB	1 GB	54 CPUs 36 GB Ephemeral Storage: 9 GB

Table 3-35 (Cont.) UDR Resources and their Utilization (Average Latency: 19ms for N36 and 24ms for Provisioning)

Micro service name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Ephemeral Storage Per Pod	Total Resources
Ingress-gateway-prov	ingressgateway-prov	2	4 CPUs	4 GB	1 GB	8 CPUs 8 GB Ephemeral Storage: 2 GB
Nudr-dr-service	nudr-dr-service	17	6 CPUs	4 GB	1 GB	102 CPUs 68 GB Ephemeral Storage: 17 GB
Nudr-dr-provservice	nudr-dr-provservice	2	4 CPUs	4 GB	1 GB	8 CPUs 8 GB Ephemeral Storage: 2 GB
Nudr-notify-service	nudr-notify-service	3	6 CPUs	5 GB	1 GB	18 CPUs 15 GB Ephemeral Storage: 3 GB
Nudr-egress-gateway	egressgateway	2	6 CPUs	4 GB	1 GB	12 CPUs 8 GB Ephemeral Storage: 2 GB
Nudr-config	nudr-config	2	1 CPU	1 GB	1 GB	2 CPUs 2 GB Ephemeral Storage: 2 GB
Nudr-config-server	nudr-config-server	2	1 CPU	1 GB	1 GB	2 CPUs 2 GB Ephemeral Storage: 2 GB
Alternate-route	alternate-route	2	1 CPU	1 GB	1 GB	2 CPUs 2 GB Ephemeral Storage: 2 GB
Nudr-nrf-client-nfmanagement-service	nrf-client-nfmanagement	2	1 CPU	1 GB	1 GB	2 CPUs 2 GB Ephemeral Storage: 2 GB

Table 3-35 (Cont.) UDR Resources and their Utilization (Average Latency: 19ms for N36 and 24ms for Provisioning)

Micro service name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Ephemeral Storage Per Pod	Total Resources
App-info	app-info	2	1 CPU	1 GB	1 GB	2 CPUs 2 GB Ephemeral Storage: 2 GB
Perf-info	perf-info	2	1 CPU	1 GB	1 GB	2 CPUs 2 GB Ephemeral Storage: 2 GB
Nudr-dbc- auditor- service	nudr-dbc- auditor- service	1	1 CPU	1 GB	1 GB	1 CPU 1 GB Ephemeral Storage: 1 GB

The following table provides observation data for the performance test that can be used for the benchmark testing to scale up UDR performance:

Table 3-36 Result and Observation

Parameter	Values
Test Duration	4h30m
TPS Achieved	17.2K Signaling
Success rate	100%

3.5 Test Scenario 5: 25K N36 and 1.3K Provisioning Profile (600 SOAP and 700 REST)

You can perform benchmark tests on UDR for compute and storage resources by considering the following conditions:

- Signaling: 25K TPS
- Provisioning: 1.3K
- Total Subscribers: 35M

The following features are enabled for this testcase:

- Auto Enrollment and Auto Create Features
- Overload Handling
- ETag (Entity Tag)
- Ingress Gateway Pod Protection

- Support for User-Agent Header
- 3gpp-Sbi-Correlation-Info Header
- Suppress Notification

The following table describes the benchmarking parameters and their values:

Table 3-37 Traffic Model Details

Request Type	Details	TPS
N36 traffic 25K TPS	subs-to-notify POST	5K (20%)
	sm-data GET	5K (20%)
	subs-to-notify DELETE	5K (20%)
	sm-data PATCH	10K (40%)
SOAP PROVISIONING 600 TPS	GET	100
	UPDATE QUOTA	50
	UPDATE DYNAMIC QUOTA	50
	UPDATE STATE	100
	UPDATE SUBSCRIBER	100
	CREATE SUBSCRIBER	100
	DELETE SUBSCRIBER	100
REST PROVISIONING 700 TPS	DELETE (Cleaning the auto provisioned subscribers)	700

The following table describes the test case parameters and their values:

Table 3-38 Testcase Parameters

Input Parameter Details	Configuration Values
UDR Version Tag	25.1.100
Target TPS	25K TPS Signaling
Notification Rate	300
UDR Response Timeout	2.7s
Signaling Requests Latency Recorded on Client	25ms
Provisioning Requests Latency Recorded on Client	25ms

Table 3-39 Consolidated Resource Requirement

Resource	CPU	Memory	Ephemeral Storage	PVC
cnDBTier	143 CPUs	640 GB	29 GB	1875 GB
UDR	247 CPUs	184 GB	55 GB	NA
Buffer	50 CPUs	50 GB	20 GB	200 GB
Total	440 CPUs	814 GB	104 GB	2075 GB

The following table describes cnDBTier resources and their utilization:

Table 3-40 cnDBTier Resources and their Utilization

Microservice name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Ephemeral Storage Per Pod	PVC Allocation Per Pod	Total Resources	CPU Usage	Memory Usage	PVC Usage
Management node (ndbmgmd)	mysqlndbcluster	2	2 CPUs	9 GB	1 GB	15 GB	4 CPUs 18 GB Ephemeral Storage: 2 GB PVC Allocation: 30 GB	Minimal resources are used.		0.032MB/pod
Data node (ndbmt-d)	mysqlndbcluster	4	4 CPUs	124 GB	1 GB	132 GB Backup : 220 GB	16 CPUs 496 GB Ephemeral Storage: 4 GB PVC Allocation: 1408 GB	2.2 CPU/pod	113 GB/pod	5.97GB/pod
APP SQL node (ndbapm-sql-d)	mysqlndbcluster	18	6 CPUs	4 GB	1 GB	4 GB	108 CPUs 72 GB Ephemeral Storage: 18 GB PVC Allocation: 72 GB	3.6 CPU/pod	0.8 GB/pod	221MB/pod
SQL node (ndbmysqld, used for replication)	mysqlndbcluster	2	4 CPUs	24 GB	1 GB	110 GB	8 CPUs 48 GB Ephemeral Storage: 2 GB PVC Allocation: 220 GB	Minimal resources are used.		Minimal resources are used.

Table 3-40 (Cont.) cnDBTier Resources and their Utilization

Microservice name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Ephemeral Storage Per Pod	PVC Allocation Per Pod	Total Resources	CPU Usage	Memory Usage	PVC Usage
DB Monitor Service (db-monitor-svc)	db-monitor-svc	1	4 CPUs	4 GB	1 GB	NA	4 CPU 4 MB Ephemeral Storage: 1 GB	Minimal resources are used.		Minimal resources used
DB Backup Manager Service (backup-manager-svc)	backup-manager-svc	1	100 millicores CPUs	128 MB	1 GB	NA	1 CPU 128 MB Ephemeral Storage: 1 GB	Minimal resources are used.		Minimal resources used
Replication service (Multi site cases)	replication-svc	1	2 CPUs	2 GB	1 GB	143 GB	2 CPUs 2 GB Ephemeral Storage: 1 GB PVC Allocation: 143 GB	Minimal resources used		NA Note: Tested in single site deployment

The following table describes UDR resources and their utilization:

Table 3-41 UDR Resources and their Utilization (Average Latency: 41ms for N36 and Provisioning)

Microservice name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Ephemeral Storage Per Pod	Total Resources	CPU Usage	Memory Usage	CPU Utilization
Ingress-gateway-sig	ingressgateway-sig	13	6 CPUs	4 GB	1 GB	78 CPUs 52 GB Ephemeral Storage: 13 GB	2.4 CPU/pod	2.5 GB/pod	40%
Ingress-gateway-prov	ingressgateway-prov	2	4 CPUs	4 GB	1 GB	8 CPUs 8 GB Ephemeral Storage: 2 GB	0.9 CPUs/pod	2.2 GB/pod	21%

Table 3-41 (Cont.) UDR Resources and their Utilization (Average Latency: 41ms for N36 and Provisioning)

Micro service name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Ephemeral Storage Per Pod	Total Resources	CPU Usage	Memory Usage	CPU Utilization
Nudr-dr-service	nudr-dr-service	20	6 CPUs	4 GB	1 GB	120 CPUs 80 GB Ephemeral Storage : 20 GB	3.3 CPUs/pod	1.9 GB/pod	55%
Nudr-dr-provservice	nudr-dr-provservice	2	4 CPUs	4 GB	1 GB	8 CPUs 8 GB Ephemeral Storage : 2 GB	2.4 CPUs/pod	1.8 GB/pod	40%
Nudr-notify-service	nudr-notify-service	3	6 CPUs	5 GB	1 GB	18 CPUs 15 GB Ephemeral Storage : 3 GB	Minimal resources are used.		
Nudr-egress-gateway	egressgateway	2	6 CPUs	4 GB	1 GB	12 CPUs 8 GB Ephemeral Storage : 2 GB	Minimal resources are used.		
Nudr-config	nudr-config	2	1 CPU	1 GB	1 GB	2 CPUs 2 GB Ephemeral Storage : 2 GB	Minimal resources are used.		
Nudr-config-server	nudr-config-server	2	1 CPU	1 GB	1 GB	2 CPUs 2 GB Ephemeral Storage : 2 GB	Minimal resources are used.		
Alternate-route	alternate-route	2	1 CPU	1 GB	1 GB	2 CPUs 2 GB Ephemeral Storage : 2 GB	Minimal resources are used.		

Table 3-41 (Cont.) UDR Resources and their Utilization (Average Latency: 41ms for N36 and Provisioning)

Micro service name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Ephemeral Storage Per Pod	Total Resources	CPU Usage	Memory Usage	CPU Utilization
Nudr-nrf-client-nfmanagement-service	nrf-client-nfmanagement	2	1 CPU	1 GB	1 GB	2 CPUs 2 GB Ephemeral Storage : 2 GB	Minimal resources are used.		
App-info	app-info	2	1 CPU	1 GB	1 GB	2 CPUs 2 GB Ephemeral Storage : 2 GB	Minimal resources are used.		
Perf-info	perf-info	2	1 CPU	1 GB	1 GB	2 CPUs 2 GB Ephemeral Storage : 2 GB	Minimal resources are used.		
Nudr-dbcrauditor-service	nudr-dbcrauditor-service	1	1 CPU	1 GB	1 GB	1 CPU 1 GB Ephemeral Storage : 1 GB	Minimal resources are used.		

The following table describes Provisioning Gateway resources and their utilization:

Table 3-42 Provisioning Gateway Resources and their Utilization

Micro service name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Total Resources	CPU Usage	Memory Usage	CPU Utilization
provgw-ingress-gateway	ingressgateway	2	4 CPUs	4 GB	8 CPUs 8 GB Ephemeral Storage: 2 GB	430m CPU/pod	1.3 GB/pod	11%
provgw-egress-gateway	egressgateway	2	4 CPUs	4 GB	8 CPUs 8 GB Ephemeral Storage: 2 GB	520m CPU/pod	1 GB/pod	13%

Table 3-42 (Cont.) Provisioning Gateway Resources and their Utilization

Micro service name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Total Resources	CPU Usage	Memory Usage	CPU Utilization
provgw-service	provgw-service	4	2 CPUs	2 GB	8 CPUs 8 GB Ephemeral Storage: 2 GB	460m CPU/pod	1 GB/pod	22%
provgw-config	provgw-config	2	2 CPUs	2 GB	4 CPUs 4 GB Memory Ephemeral Storage: 2 GB	Minimal resources are used. Utilization data is not captured.		
provgw-config-server	provgw-config-server	2	2 CPUs	2 GB	4 CPUs 4 GB Memory Ephemeral Storage: 2 GB	Minimal resources are used. Utilization data is not captured.		

The following table provides observation data for the performance test that can be used for the benchmark testing to scale up UDR performance:

Table 3-43 Result and Observation

Parameter	Values
Test Duration	6h
TPS Achieved	25K Signaling
Success rate	100%

3.6 Test Scenario 6: 17.2K N36 + 10K SH and 1.2K Provisioning Profile (600 SOAP and 600 REST)

You can perform benchmark tests on UDR for compute and storage resources by considering the following conditions:

- Signaling : 17.2K N36 + 10K SH
- Provisioning: 1.2K
- Total Subscribers: 35M

The following features are enabled for this testcase:

- Auto Enrollment and Auto Create Features
- Overload Handling

- ETag (Entity Tag)
- Ingress Gateway Pod Protection
- Support for User-Agent Header
- 3gpp-Sbi-Correlation-Info Header
- Suppress Notification
- Subscriber Activity Logging
- Diameter Gateway Pod Congestion Control

The following table describes the benchmarking parameters and their values:

Table 3-44 Traffic Model Details

Request Type	Details	TPS
N36 17.2K TPS	subs-to-notify POST	3.6K (20%)
	sm-data GET	3.6K (20%)
	subs-to-notify DELETE	3.6K (20%)
	sm-data PATCH	6.4K (40%)
SH 10K TPS	UDR	4K
	PUR	1.2K
	SNR	4.8K
SH PNR 700 TPS	PNR	700
SOAP PROVISIONING 600 TPS	GET	100
	UPDATE QUOTA	50
	UPDATE DYNAMIC QUOTA	50
	UPDATE STATE	100
	UPDATE SUBSCRIBER	100
	CREATE SUBSCRIBER	100
	DELETE SUBSCRIBER	100
REST PROVISIONING 600 TPS	DELETE (Cleaning auto provisioned subscribers)	600

The following table describes the test case parameters and their values:

Table 3-45 Testcase Parameters

Input Parameter Details	Configuration Values
UDR Version Tag	24.3.0
Target TPS	17.2K N36 + 10K SH
Notification Rate	700
UDR Response Timeout	2.7s
Signaling Requests Latency Recorded on Client	36ms
Provisioning Requests Latency Recorded on Client	36ms
Diameter (SH) Requests Latency Recorded on Client	40ms

Table 3-46 Consolidated Resource Requirement

Resource	CPU	Memory	Ephemeral Storage	PVC
cnDBTier	97 CPUs	609 GB	21 GB	1815 GB
UDR	215 CPUs	155 GB	48 GB	NA
Buffer	50 CPUs	50 GB	20 GB	200 GB
Total	362 CPUs	814 GB	89 GB	2015 GB

The following table describes cnDBTier resources and their utilization:

Table 3-47 cnDBTier Resources and their Utilization

Microservice name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Ephemeral Storage Per Pod	PVC Allocation Per Pod	Total Resources
Management node (ndbmcmd)	mysqlndbcluster	2	2 CPUs	9 GB	1 GB	15 GB	4 CPUs 18 GB Ephemeral Storage: 2 GB PVC Allocation: 30 GB
Data node (ndbmtd)	mysqlndbcluster	4	4 CPUs	124 GB	1 GB	132 GB Backup: 220 GB	16 CPUs 496 GB Ephemeral Storage: 4 GB PVC Allocation: 1408 GB
APP SQL node (ndbappmysqld)	mysqlndbcluster	14	6 CPUs	4 GB	1 GB	4 GB	84 CPUs 56 GB Ephemeral Storage: 14 GB PVC Allocation: 20 GB
SQL node (ndbmysqld, used for replication)	mysqlndbcluster	2	4 CPUs	24 GB	1 GB	110 GB	8 CPUs 48 GB Ephemeral Storage: 2 GB PVC Allocation: 220 GB

Table 3-47 (Cont.) cnDBTier Resources and their Utilization

Microservice name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Ephemeral Storage Per Pod	PVC Allocation Per Pod	Total Resources
DB Monitor Service	db-monitor-svc	1	4 CPUs	4 GB	1 GB	NA	4 CPU 4 MB Ephemeral Storage: 1 GB
DB Backup Manager Service	backup-manager-svc	1	100 millicores CPUs	128 MB	1 GB	NA	1 CPU 128 MB Ephemeral Storage: 1 GB
Replication service (Multi site cases)	replication-svc	1	2 CPUs	2 GB	1 GB	143 GB	2 CPUs 2 GB Ephemeral Storage: 1 GB PVC Allocation: 143 GB

The following table describes UDR resources and their utilization:

Table 3-48 UDR Resources and their Utilization (Average Latency: 36ms for N36 and Provisioning. Diameter (SH) is 40ms.

Micro service name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Ephemeral Storage Per Pod	Total Resources
Ingress-gateway-sig	ingressgateway-sig	9	6 CPUs	4 GB	1 GB	54 CPUs 36 GB Ephemeral Storage: 9 GB
Ingress-gateway-prov	ingressgateway-prov	2	4 CPUs	4 GB	1 GB	8 CPUs 8 GB Ephemeral Storage: 2 GB
Nudr-dr-service	nudr-dr-service	17	6 CPUs	4 GB	1 GB	102 CPUs 68 GB Ephemeral Storage: 17 GB

Table 3-48 (Cont.) UDR Resources and their Utilization (Average Latency: 36ms for N36 and Provisioning. Diameter (SH) is 40ms.

Micro service name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Ephemeral Storage Per Pod	Total Resources
Nudr-dr-provservice	nudr-dr-provservice	2	4 CPUs	4 GB	1 GB	8 CPUs 8 GB Ephemeral Storage: 2 GB
Nudr-notify-service	nudr-notify-service	3	6 CPUs	5 GB	GB	18 CPUs 15 GB Ephemeral Storage: 3 GB
Nudr-egress-gateway	egressgateway	2	6 CPUs	4 GB	1 GB	12 CPUs 8 GB Ephemeral Storage: 2 GB
Nudr-diam-gateway	nudr-diam-gateway	2	6 CPUs	5 GB	1 GB	12 CPUs 10 GB Ephemeral Storage: 2 GB
Nudr-diameterproxy	nudr-diameterproxy	9	6 CPUs	4 GB	1 GB	54 CPUs 36 GB Ephemeral Storage: 9 GB
Nudr-config	nudr-config	2	1 CPU	1 GB	1 GB	2 CPUs 2 GB Ephemeral Storage: 2 GB
Nudr-config-server	nudr-config-server	2	1 CPU	1 GB	1 GB	2 CPUs 2 GB Ephemeral Storage: 2 GB
Alternate-route	alternate-route	2	1 CPU	1 GB	1 GB	2 CPUs 2 GB Ephemeral Storage: 2 GB
Nudr-nrf-client-nfmanagement-service	nrf-client-nfmanagement	2	1 CPU	1 GB	1 GB	2 CPUs 2 GB Ephemeral Storage: 2 GB

Table 3-48 (Cont.) UDR Resources and their Utilization (Average Latency: 36ms for N36 and Provisioning. Diameter (SH) is 40ms.

Micro service name	Container name	Number of Pods	CPU Allocation Per Pod	Memory Allocation Per Pod	Ephemeral Storage Per Pod	Total Resources
App-info	app-info	2	1 CPU	1 GB	1 GB	2 CPUs 2 GB Ephemeral Storage: 2 GB
Perf-info	perf-info	2	1 CPU	1 GB	1 GB	2 CPUs 2 GB Ephemeral Storage: 2 GB
Nudr-dbcr-auditor-service	nudr-dbcr-auditor-service	1	1 CPU	1 GB	1 GB	1 CPU 1 GB Ephemeral Storage: 1 GB

The following table provides observation data for the performance test that can be used for the benchmark testing to scale up UDR performance:

Table 3-49 Result and Observation

Parameter	Values
Test Duration	72h
TPS Achieved	17.2K N36 + 10K SH
Success rate	100%