

Oracle® Communications

Cloud Native Core, Binding Support Function Benchmarking Guide



Release 25.2.100

G48164-02

December 2025

ORACLE®

Copyright © 2023, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

1	Introduction	
1.1	Purpose and Scope	1
1.2	References	1
2	Deployment Environment	
2.1	Deployed Components	1
3	BSF Benchmark Testing	
3.1	Test Scenario1: BSF Call Flow Model on Two-Site GeoRedundant (GR) setup, with 15K TPS on each site	1
3.1.1	Test Case and Setup Details	1
3.1.2	CPU and Memory Utilization	3
3.1.3	TPS and DB Statistics	4
3.1.4	Results	5
3.2	Test Scenario 2: BSF Call Flow Model Performance deployed on Single Site, with 30K TPS and ASM enabled	5
3.2.1	Test Case and Setup Details	5
3.2.2	CPU and Memory Utilization	6
3.2.3	TPS and DB Statistics	7
3.2.4	Results	8
3.3	Test Scenario 3: BSF Call Model deployed on Three-Site GeoRedundant (GR) setup, with 35K TPS and ASM enabled	8
3.3.1	Test Case and Setup Details	8
3.3.2	CPU and Memory Utilization	10
3.3.3	TPS and DB Statistics	11
3.3.4	Results	11
3.4	Test Scenario 4: BSF Call Model deployed on Single Site setup, with 35K TPS traffic and ASM enabled	12
3.4.1	Test Case and Setup Details	12
3.4.2	CPU and Memory Utilization	14
3.4.3	TPS and DB Statistics	15
3.4.4	Results	15

3.5	Test Scenario 5: BSF Performance Benchmarking 47.7K TPS traffic on three-site Setup	15
3.5.1	Test Case and Setup Details	16
3.5.2	CPU and Memory Utilization	18
3.5.3	TPS and DB Statistics	19
3.5.4	Results	20
3.6	Test Scenario 6: BSF Performance Benchmarking 45K TPS traffic on a three-site Setup with traffic on one Site	20
3.6.1	Test Case and Setup Details	21
3.6.2	CPU and Memory Utilization	23
3.6.3	TPS and DB Statistics	25
3.6.4	Results	25
3.7	Test Scenario 7: BSF Performance Benchmarking 45K TPS traffic on a three-site Setup with traffic on Two Site	26
3.7.1	Test Case and Setup Details	26
3.7.2	CPU and Memory Utilization	28
3.7.3	TPS and DB Statistics	30
3.7.4	Results	30
3.8	Test Scenario 8: BSF Performance Benchmarking 45K TPS traffic on a three-site Setup with traffic on three Sites	30
3.8.1	Test Case and Setup Details	31
3.8.2	CPU and Memory Utilization	33
3.8.3	TPS and DB Statistics	34
3.8.4	Results	35
3.9	Test Scenario 9: BSF Performance Benchmarking 54K TPS traffic on a three-site Setup with traffic on one Site (25 Million Binding Sessions)	35
3.9.1	Test Case and Setup Details	36
3.9.2	CPU and Memory Utilization	38
3.9.3	TPS and DB Statistics	40
3.9.4	Results	40
3.10	Test Scenario 10: BSF Performance Benchmarking 54K TPS traffic on a three-site Setup with traffic on one Site (50 Million Binding Sessions)	41
3.10.1	Test Case and Setup Details	41
3.10.2	CPU and Memory Utilization	43
3.10.3	TPS and DB Statistics	45
3.10.4	Results	45
3.11	BSF Performance Benchmarking 54K TPS traffic on a Four-site Setup with traffic on one Site (Congestion Disabled)	46
3.11.1	Test Case and Setup Details	46
3.11.2	CPU and Memory Utilization	48
3.11.3	TPS and DB Statistics	50
3.11.4	Results	51
3.12	BSF Performance Benchmarking 54K TPS traffic on a Four-site Setup with traffic on one Site (Congestion Enabled)	51

3.12.1	Test Case and Setup Details	52
3.12.2	CPU and Memory Utilization	54
3.12.3	TPS and DB Statistics	56
3.12.4	Results	57
3.13	BSF Call Model Deployed on a Three-site Setup with 63K TPS Traffic on One Site and ASM Enabled	57
3.13.1	Test Case and Setup Details	57
3.13.2	CPU and Memory Utilization	60
3.13.3	TPS and DB Statistics	64
3.13.4	Results	65
3.14	BSF Call Model Deployed on a Four-site Setup with 22K TPS Traffic on One Site and ASM Enabled	65
3.14.1	Test Case and Setup Details	66
3.14.2	CPU and Memory Utilization	73
3.14.3	TPS and DB Statistics	80
3.14.4	Results	81

My Oracle Support

My Oracle Support (<https://support.oracle.com>) is your initial point of contact for all product support and training needs. A representative at Customer Access Support can assist you with My Oracle Support registration.

Call the Customer Access Support main number at 1-800-223-1711 (toll-free in the US), or call the Oracle Support hotline for your local country from the list at <http://www.oracle.com/us/support/contact/index.html>. When calling, make the selections in the sequence shown in the following list on the Support telephone menu:

- For Technical issues such as creating a new Service Request (SR), select **1**.
- For Non-technical issues such as registration or assistance with My Oracle Support, select **2**.
- For Hardware, Networking and Solaris Operating System Support, select **3**.

You are connected to a live agent who can assist you with My Oracle Support registration and opening a support ticket.

My Oracle Support is available 24 hours a day, 7 days a week, 365 days a year.

Acronyms

The following table provides information about the acronyms and the terminology used in the document.

Table Acronyms and Terminologies

Acronym	Description
ASM	Aspen Service Mesh
AAR	Authorization Authentication Request
BSF	Oracle Communications Cloud Native Core, Binding Support Function
CNE	Oracle Communications Cloud Native Core, Cloud Native Environment
CPU	Central Processing Unit
DIMM	Dual In-line Memory Module
HTTP	Hypertext Transfer Protocol
MPS	Messages Per Second
NF	Network Function
NRF	Oracle Communications Cloud Native Core, Network Repository Function
PCF	Policy Control Function
P-CSCF	Proxy Call Session Control Function
PDU	Protocol Data Unit
PV	Persistent Volume
RAM	Random Access Memory
SMF	Session Management Function
STR	Session Termination Request
TPS	Transactions Per Second
vCNE	Virtual Cloud Native Environment

What's New in this Guide

This section introduces the documentation updates for Release 25.2.1xx.

Release 25.2.100 - G48164-02, December 2025

- Updated the deployed components in the Deployment Environment section. For more information, see [Deployed Components](#) section.
- Added the following new BSF Performance Benchmarking test scenario:
 - [BSF Call Model Deployed on a Four-site Setup with 22K TPS Traffic on One Site and ASM Enabled](#)
 - [BSF Call Model Deployed on a Three-site Setup with 63K TPS Traffic on One Site and ASM Enabled](#)

1

Introduction

Oracle Communications Cloud Native Core, Binding Support Function (BSF) is a key component of the 5G Service Based Architecture. The Binding Support Function (BSF) allows Policy Control Function (PCF) to register, update, and remove the binding information from it, and allows Network Function (NF) consumers to discover the selected Policy Control Function.

The BSF stores the binding information for a certain PDU sessions and discovers the selected Policy Control Function according to the binding information. It also acts as diameter proxy agent or diameter redirect agent to Rx requests targeting an IP address of a UE to the selected Policy Control Function.

For any AF using Rx, such as P-CSCF, the Binding Support Function determines the selected Policy Control Function address according to the information carried by the incoming Rx requests.

The BSF provides a PDU session binding functionality, which ensures that an Application Function (AF) request for a certain PDU Session reaches the relevant PCF holding the PDU Session information.

BSF supports the following functions:

- Allows BSF users to register, discover, and remove the binding information
- Allows network function consumers to retrieve the binding information

Note

The performance and capacity of the BSF system may vary based on the call model, Feature/Interface configuration, and underlying CNE and hardware environment.

For more information, see *Oracle Communications Cloud Native Core, Binding Support Function User Guide*.

1.1 Purpose and Scope

This document is designed to help operators in measuring the performance and capacity of BSF application, and deployment environment setup software such as Cloud Native Environment (CNE) and cnDBTier.

It is recommended that BSF is run through a benchmark on the target cloud native infrastructure to determine the capacity and performance in the target infrastructure. This information can be used to adjust the initial deployment resources for BSF. These recommendations are just guidelines, since the actual performance of the BSF can vary significantly based on the details of the infrastructure.

1.2 References

- *Oracle Communications Cloud Native Core, Binding Support Function Installation, Upgrade, and Fault Recovery Guide*

- *Oracle Communications Cloud Native Core, Binding Support Function User Guide*
- *Oracle Communications Cloud Native Core, Cloud Native Environment Installation, Upgrade, and Fault Recovery Guide*
- *Oracle Communications Cloud Native Core, cnDBTier Installation, Upgrade, and Fault Recovery Guide*

2

Deployment Environment

This section describes the infrastructure that was used for benchmarking, Oracle Communications Cloud Native Core, Binding Support Function (BSF) deployed in cloud native platform.

2.1 Deployed Components

This section provides details about the deployed components.

Deployment Platform

Oracle Communications Cloud Native Environment (CNE) 23.3.5 and BareMetal can be used for performing benchmark tests.

Table 2-1 Observability Services

Service Name	Version
Oracle Opensearch	2.3.0
Fluentd	1.16
Oracle Opensearch Dashboard	2.3.0
Prometheus	2.44.0
Grafana	9.5.3
Jaeger	1.45.0

The following binding schema has been used for this test scenario:

```
CREATE TABLE `pcf_binding` (  
  `binding_id` binary(16) NOT NULL,  
  `ipv4_addr` varchar(64) DEFAULT NULL,  
  `ip_domain` varchar(128) DEFAULT NULL,  
  `ipv6_prefix` varchar(64) DEFAULT NULL,  
  `mac_addr_48` varchar(64) DEFAULT NULL,  
  `dnn` varchar(128) DEFAULT NULL,  
  `supi` varchar(64) DEFAULT NULL,  
  `gpsi` varchar(64) DEFAULT NULL,  
  `snssai_sd` varchar(64) DEFAULT NULL,  
  `snssai_sst` int DEFAULT NULL,  
  `created_date_time` datetime(6) NOT NULL,  
  `json_content` longblob NOT NULL,  
  `last_access_timestamp` bigint unsigned DEFAULT NULL,  
  `site_id` varchar(128) DEFAULT NULL,  
  `audit_attempts` bigint unsigned DEFAULT NULL,  
  `last_audited_date_time` datetime DEFAULT NULL,  
  PRIMARY KEY (`binding_id`),  
  KEY `idx_audit_datetime` (`last_audited_date_time`),  
  KEY `idx_created_date_time` (`created_date_time`),  
  KEY `idx_ipv4Addr` (`ipv4_addr`,`created_date_time`),
```

```

KEY `idx_ipv6Prefix` (`ipv6_prefix`,`created_date_time`),
KEY `idx_macAddr48` (`mac_addr_48`,`created_date_time`),
KEY `idx_supi` (`supi`,`created_date_time`),
KEY `idx_gpsi` (`gpsi`,`created_date_time`)
) ENGINE=ndbcluster DEFAULT CHARSET=utf8mb3;

```

Cloud Native Orchestrator

Kubernetes 1.26.x is used to manage application pods across the cluster.

cnDBTier

cnDBTier 25.2.100 is used for performing benchmark tests.

BSF Infrastructure Details

BSF infrastructure used for Benchmarking is described in this section.

Table 2-2 Hardware Details

Hardware	Details
Environment	BareMetal
Server	ORACLE SERVER X9-2
Model	Intel(R) Xeon(R) Platinum 8358
Clock Speed	2.60 GHz
Total Cores	64
Memory Size	64 GB
Type	DIMM DDR4 Synchronous Registered (Buffered) 3200 MHz (0.3 ns)
Installed DIMMs	16
Maximum DIMMs	32
Installed Memory	1024 GB

Table 2-3 Software Details

Applications	Version
BSF	25.2.100
ASM	1.14.6
cnDBTier	25.2.100
CNE	23.3.5

For more information about BSF Installation details, see *Oracle Communications Cloud Native Core, Binding Support Function Installation, Upgrade, and Fault Recovery Guide*.

3

BSF Benchmark Testing


This chapters describes BSF Application related test scenarios that are validated for benchmarking BSF.

This section describes the set-up and configurations used to benchmark BSF, and then the specific results for the benchmarks are provided for each benchmark infrastructure.

3.1 Test Scenario1: BSF Call Flow Model on Two-Site GeoRedundant (GR) setup, with 15K TPS on each site

BSF Call Flow Model: BSF Performance Benchmark for 15kTPS on a ASM enabled two-site georedundant setup. The following image represents the BSF Deployed Environment for two Sites.

Figure 3-1 Two-Site BSF Deployment

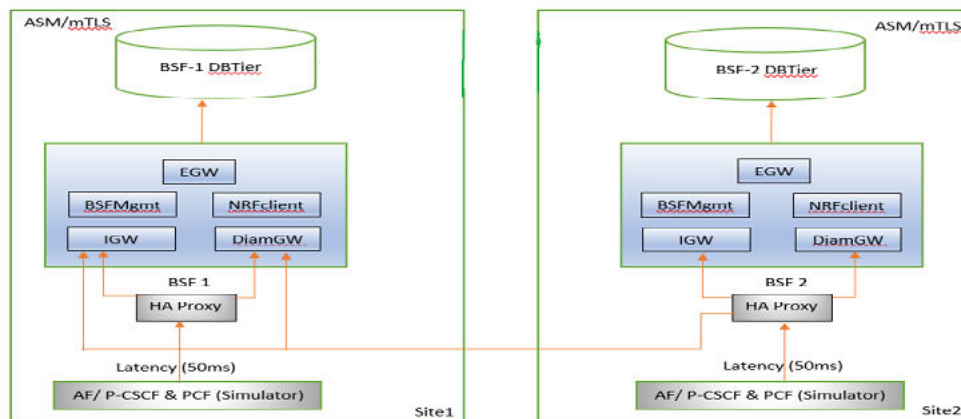

3.1.1 Test Case and Setup Details

Table 3-1 Test Case Parameters

Parameters	Values
Call Rate	30K TPS (15k TPS each BSF Instance)
Call Mix	2.1k nbsf Traffic (1.05k each site) and 27.9k Rx traffic (13.95k each site)

Table 3-1 (Cont.) Test Case Parameters

Parameters	Values
Traffic Ratio	Nbsf TPS - 1.05k Each Site Binding Create ratio -1 Binding Delete ratio - 1 Rx TPS - 13.95k Each Site Rx AAR-I ratio - 1 Other Rx messages ratio (UPDATE and STR) - 2
Active Binding Sessions	~15000000
Execution Time	11 Hours
Site Redundancy	Two-Site deployment with replication enabled

Table 3-2 Resource Footprint for BSF Microservices

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod (Gi)	Memory Limit Per Pod (Gi)	Replicas
appinfo	1	1	0.5	1	2
audit-service	1	2	1	1	2
Bsf Management Service	3	4	1	4	10
cm-service	2	4	0.5	2	2
config server	2	4	0.5	2	2
Diameter Gateway	3	4	1	2	10
Egress Gateway	3	4	4	4	2
Ingress Gateway	3	4	2	4	3
nrf-client-nfmanagement	1	1	1	1	2
queryservice	1	2	1	1	2
performance	1	1	0.5	1	2

Note

Min Replica = Max Replica

Table 3-3 Resource Footprint for cnDBTier Microservices

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod (Gi)	Memory Limit Per Pod (Gi)	Replica Count	PVC
Management node	4	4	8	10	3	ndbdisksize: 15Gi

Table 3-3 (Cont.) Resource Footprint for cnDBTier Microservices

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod (Gi)	Memory Limit Per Pod (Gi)	Replica Count	PVC
Data node	10	10	96	112	10	ndbdisksize: 125Gi ndbbackupdisksize: 288Gi
mysqld	4	4	8	8	2	ndbdisksize: 50Gi
appmysqld	8	8	2	2	7	ndbdisksize: 16Gi
db-replication-service	0.2	0.2	0.5	0.5	1	ndbdisksize: 20Gi

Note

Min Replica = Max Replica

Table 3-4 BSF Features

Features Name	Feature Status(Enabled/Disabled)
Nbsf	Enabled
Rx	Enabled

3.1.2 CPU and Memory Utilization

This section lists the CPU and memory utilization for BSF and cnDBTier.

Table 3-5 BSF Microservices and their Resource Utilization - Site1 and Site2

Service	CPU-Site1	CPU - Site2	Memory - Site1	Memory - Site2
db-backup-manager-svc	0 (0%)	0 (0%)	0.03 (23.44%)	0.03 (23.44%)
db-monitor-svc	0.01 (5%)	0.01 (5%)	0.25 (50%)	0.23 (46%)
delhi-mumbai-replication-svc	0 (0%)	0 (0%)	0.42 (84%)	0.0 (0%)
init-sidecar	0 (0%)	0 (0%)	0 (0%)	0 (0%)
mysqlndbcluster	7.9 (14.11%)	7.4 (13.21%)	5.26 (37.57%)	5.07 (36.21%)
mysqlndbcluster	0.03 (0.25%)	0.03 (0.25%)	0.07 (0.23%)	0.07 (0.23%)
db-backup-executor-svc	0 (0%)	0 (0%)	0 (0%)	0 (0%)
mysqlndbcluster	8.96 (8.96%)	8.72 (8.72%)	471.79 (42.12%)	471.78 (42.12%)
init-sidecar	0 (0%)	0 (0%)	0 (0%)	0 (0%)
mysqlndbcluster	0.34 (4.25%)	0.36 (4.5%)	1.74 (10.88%)	1.76 (11%)
appinfo	0.03 (1.5%)	0.03 (1.5%)	0.44 (22%)	0.44 (22%)

Table 3-5 (Cont.) BSF Microservices and their Resource Utilization - Site1 and Site2

Service	CPU-Site1	CPU - Site2	Memory - Site1	Memory - Site2
bsf-management-service	7.58 (18.95%)	7.24 (18.1%)	12.92 (32.3%)	14.13 (35.33%)
diam-gateway	7.45 (18.63%)	7.12 (17.8%)	8.96 (44.8%)	8.95 (44.75%)
config-server	0.15 (1.88%)	0.14 (1.75%)	1.55 (38.75%)	1.64 (41%)
ocbsf-egress-gateway	0.01 (0.13%)	0.01 (0.13%)	1.32 (16.5%)	1.33 (16.63%)
ocbsf-ingress-gateway	1.49 (12.42%)	1.38 (11.5%)	6.77 (56.42%)	5.13 (42.75%)
nrf-client-nfmanagement	0.01 (0.5%)	0.01 (0.5%)	0.92 (46%)	0.79 (39.5%)
audit-service	0.01 (0.25%)	0.01 (0.25%)	0.7 (35%)	0.72 (36%)
cm-service	0.02 (0.25%)	0.01 (0.13%)	1.72 (43%)	1.66 (41.5%)
queryservice	0 (0%)	0 (0%)	0.5 (25%)	0.54 (27%)
ocbsf-performance/perf-info	0 (0%)	0.01 (0.5%)	0.14 (7%)	0.1 (5%)

Table 3-6 Observed Values of cnDBTier Services

Name	Targets
ndbappmysqld	36%/80%
ndbmngmd	0%/80%
ndbmtd	15%/80%
ndbmysqld	6%/80%
ocbsf-appinfo	1%/80%
ocbsf-bsf-management	39%/80%
ocbsf-config-server	7%/80%
ocbsf-egress-gateway	0%/80%
ocbsf-ingress-gateway	22%/80%
ocbsf-nrf-client-nfmanagement	0%/80%
ocbsf-query-service	0%/80%

3.1.3 TPS and DB Statistics

This section lists the TPS (Transactions Per Second) and DB (Database) Statistics for BSF and cnDBTier.

Table 3-7 Overall TPS Ingress/Egress TPS to/from NF

Site	Rx	nbsf	Total TPS
Site1	13.95K	1.05k	15K
Site2	13.95K	1.05k	15K

Table 3-8 DB (Database) Statistics

DB Stats	Site1	Site2
Read Rate	5.94k	5.60k
Write Rate	11.6k	11.7k
Commit Rate	6.18k	5.85k

3.1.4 Results

Table 3-9 Latency Observations

Attributes	Average Latency (ms)
Binding Create	7.6 ms
AAR-RX-INIT	11.1 ms
AAR-RX-UPDATE	1.5 ms
RX-STR	0.7 ms

3.2 Test Scenario 2: BSF Call Flow Model Performance deployed on Single Site, with 30K TPS and ASM enabled

This test run benchmarks the performance and capacity of BSF data call model. The BSF application handles an incoming traffic of 30K TPS with replication enabled. For this setup Aspen Service Mesh (ASM) was enabled.

3.2.1 Test Case and Setup Details

Table 3-10 Test Case Parameters

Parameters	Values
Call Rate	30K TPS
Call Mix	2.1k nbsf Traffic and 27.9k Rx traffic
Traffic Ratio:	Nbsf TPS - 2100 Binding Create ratio -1 Binding Delete ratio - 1 Rx TPS - 27900 Rx AAR-I ratio - 1 Other Rx messages ratio (UPDATE and STR) - 2
Active User/Sessions	~15000000
Execution Time	14 Hours

Table 3-11 BSF Microservices Resource Allocation

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod (Gi)	Memory Limit Per Pod (Gi)	Replicas
appinfo	1	1	0.5	1	2
audit-service	1	2	1	1	2
Bsf Management Service	3	4	1	4	10
cm-service	2	4	0.5	2	2
config server	2	4	0.5	2	2
Diameter Gateway	3	4	1	2	10
Egress Gateway	3	4	4	4	2
Ingress Gateway	3	4	2	4	3
nrf-client-nfmanagement	1	1	1	1	2
queryservice	1	2	1	1	2
performance	1	1	0.5	1	2

Table 3-12 cnDBTier Microservices Resource Allocation

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod (Gi)	Memory Limit Per Pod (Gi)	Replica Count
Management node	4	4	8	10	3
Data node	10	10	96	112	10
mysqld	4	4	8	8	2
appmysqld	8	8	2	2	7
db-monitor-service	0.2	0.2	0.5	0.5	1
db-replication-service	0.2	0.2	0.5	0.5	1
db-backup-service	0.2	0.2	0.128	0.128	1

Table 3-13 BSF Features

Features Name	Feature Status
Nbsf	Enabled
Rx	Enabled

3.2.2 CPU and Memory Utilization

This section lists the CPU and memory utilization for BSF and cnDBTier.

Table 3-14 BSF Services and their Resource Utilization

Microservices	Container Count	CPU	Memory
db-backup-manager-svc	1	0 (0%)	0.03 (23.44%)
db-monitor-svc	1	0.01 (5%)	0.25 (50%)
init-sidecar	7	0 (0%)	0 (0%)
mysqlndbcluster	7	7.9 (14.11%)	5.26 (37.57%)
mysqlndbcluster	3	0.03 (0.25%)	0.07 (0.23%)
db-backup-executor-svc	10	0 (0%)	0 (0%)
mysqlndbcluster	10	8.96 (8.96%)	471.79 (42.12%)
init-sidecar	2	0 (0%)	0 (0%)
mysqlndbcluster	2	0.34 (4.25%)	1.74 (10.88%)
appinfo	2	0.03 (1.5%)	0.44 (22%)
bsf-management-service	10	7.58 (18.95%)	12.92 (32.3%)
diam-gateway	10	7.45 (18.63%)	8.96 (44.8%)
config-server	2	0.15 (1.88%)	1.55 (38.75%)
ocbsf-egress-gateway	2	0.01 (0.13%)	1.32 (16.5%)
ocbsf-ingress-gateway	3	1.49 (12.42%)	6.77 (56.42%)
nrf-client-nfmanagement	2	0.01 (0.5%)	0.92 (46%)
audit-service	2	0.01 (0.25%)	0.7 (35%)
cm-service	2	0.02 (0.25%)	1.72 (43%)
queryservice	2	0 (0%)	0.5 (25%)
perf-info	2	0 (0%)	0.14 (7%)
delhi-mumbai-replication-svc	1	0 (0%)	0.42 (84%)

Table 3-15 cnDBTier Services and their Resource Utilization

Name	Targets	MinPods	MaxPods
ndbappmysqld	35%/80%	7	7
ndbmgmd	0%/80%	3	3
ndbmtd	21%/80%	10	10
ndbmysqld	5%/80%	2	2
ocbsf-appinfo	1%/80%	2	2
ocbsf-bsf-management	67%/80%	10	10
ocbsf-config-server	6%/80%	2	2
ocbsf-egress-gateway	0%/80%	2	2
ocbsf-ingress-gateway	41%/80%	3	3
ocbsf-nrf-client-nfmanagement	0%/80%	2	2
ocbsf-query-service	0%/80%	2	2

3.2.3 TPS and DB Statistics

This section lists the TPS (Transactions Per Second) and DB (Database) Statistics for BSF.

Table 3-16 TPS Statistics

Site	Rx	nbsf	Total TPS
Site1	27.9k	2.1k	30K

Table 3-17 DB(Database) Records

DB Stats	Site
Read Rate	11.1k
Write Rate	11.7k
Commit Rate	11.9k

3.2.4 Results

Table 3-18 Latency Observations

Attributes	Average Latency (ms)
Binding Create	8.1 ms
Binding Delete	8.5 ms
AAR-RX-INIT	12.2 ms
AAR-RX-UPDATE	0.8 ms
RX-STR	0.7 ms

3.3 Test Scenario 3: BSF Call Model deployed on Three-Site GeoRedundant (GR) setup, with 35K TPS and ASM enabled

This test run benchmarks the performance and capacity of BSF data call model that is deployed on a three-site georedundant setup. At each site, nbsf interface handles 1.2k TPS traffic and Rx interface handles 10.4k TPS traffic. For this setup Aspen Service Mesh (ASM) was enabled.

3.3.1 Test Case and Setup Details

Table 3-19 Test Case Parameters

Parameters	Values
Call Rate	35K TPS
Call Mix	3.6k nbsf traffic (1.2k each site) and 31.2k Rx traffic (10.4k each site)
Traffic Ratio:	Nbsf TPS - 1.2k each Site Binding Create ratio - 1 Binding Delete ratio - 1 Rx TPS - 10.4k each Site Rx AAR-I ratio - 1 Other Rx messages ratio (UPDATE and STR) - 2

Table 3-19 (Cont.) Test Case Parameters

Parameters	Values
Active User/Sessions	~18.5M
Execution Time	14 Hours

Table 3-20 BSF Microservices Resource

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod (Gi)	Memory Limit Per Pod (Gi)	Replicas
Appinfo	1	1	0.5	1	3
Audit Service	1	2	1	1	3
Bsf Management Service	3	4	1	4	8
CM Service	2	4	0.5	2	3
Config Service	2	4	0.5	2	3
Diameter Gateway	3	4	0.5	2	9
Egress Gateway	3	4	4	6	3
Ingress Gateway	3	4	4	6	3
Nrf Client Management	1	1	1	1	3
Query Service	1	2	1	1	3
Performance	3	4	0.5	1	3

Note

Min Replica = Max Replica

Table 3-21 cnDBTier Microservices Resource

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod (Gi)	Memory Limit Per Pod (Gi)	Replicas
Management node	3	3	8	10	2
Data node	12	12	64	73	14
mysqld	4	4	16	16	4
appmysqld	12	12	20	20	2
db-monitor-service	0.2	0.2	0.5	0.5	1
db-replication-service	0.2	0.2	12	12	2

Table 3-21 (Cont.) cnDBTier Microservices Resource

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod (Gi)	Memory Limit Per Pod (Gi)	Replicas
db-backup-service	0.1	0.128	0.128	0.128	1

Note

Min Replica = Max Replica

Table 3-22 BSF Features

Features Name	Feature Status
Nbsf	Enabled
Rx	Enabled

3.3.2 CPU and Memory Utilization

This section lists the CPU and memory utilization for BSF and cnDBTier microservices. The CPU utilization is the ratio between the (total CPU utilization against total CPU request (X)) versus (target CPU Utilization (Y) set configured for the pod).

Table 3-23 BSF Microservices CPU and Memory Utilization

Service	CPU Site1	CPU Site2	CPU Site3	Memory Site1	Memory Site2	Memory Site3
Appinfo	0.04 (1.33%)	0.04 (1.33%)	0.05 (1.67%)	0.67 (22.33%)	0.67 (22.33%)	0.67 (22.33%)
Audit Service	0.01 (0.17%)	0.01 (0.17%)	0.01 (0.17%)	0.92 (30.67%)	0.9 (30%)	0.9 (30%)
CM Service	0.02 (0.17%)	0.02 (0.17%)	0.02 (0.17%)	1.42 (23.67%)	1.29 (21.5%)	1.39 (23.17%)
Bsf Management Service	5.28 (16.5%)	5.3 (16.56%)	4.92 (15.38%)	8.34 (26.06%)	8 (25%)	7.53 (23.53%)
Diameter Gateway	5.62 (15.61%)	5.37 (14.92%)	5.39 (14.97%)	6.63 (36.83%)	6.5 (36.11%)	6.35 (35.28%)
Egress Gateway	0.01 (0.08%)	0.01 (0.08%)	0.01 (0.08%)	1.97 (16.42%)	2.04 (17%)	1.97 (16.42%)
Ingress Gateway	1.36 (11.33%)	1.49 (12.42%)	1.46 (12.17%)	4.45 (37.08%)	4.47 (37.25%)	4.66 (38.83%)
Nrf Client Management	0.01 (0.33%)	0.01 (0.33%)	0.01 (0.33%)	0.95 (31.67%)	0.95 (31.67%)	0.96 (32%)
Query Service	0 (0%)	0 (0%)	0 (0%)	0.66 (22%)	0.66 (22%)	0.66 (22%)
Perf Info	0.02 (0.67%)	0.08 (2.67%)	0.09 (3%)	0.3 (10%)	0.3 (10%)	0.3 (10%)

Table 3-24 cnDBTier Microservices CPU and Memory Utilization

Service	CPU Site1	CPU Site2	CPU Site3	Memory Site1	Memory Site2	Memory Site3
ndbappmysqld	5.46 (34.13%)	5.69 (35.56%)	5.15 (32.19%)	3.18 (79.5%)	3.12 (78%)	2.96 (74%)
ndbmtl	10.29 (7.35%)	9.34 (6.67%)	8.56 (6.11%)	662.41 (42.25%)	662.4 (42.24%)	662.38 (42.24%)
ndbmysqld	0.54 (3.38%)	0.47 (2.94%)	0.46 (2.88%)	4.35 (13.59%)	4.3 (13.44%)	4.24 (13.25%)
db-backup-manager-svc	0 (0%)	0 (0%)	0 (0%)	0.04 (31.25%)	0.04 (31.25%)	0.04 (31.25%)
db-monitor-svc	0.01 (5%)	0.01 (5%)	0.01 (5%)	0.24 (48%)	0.27 (54%)	0.24 (48%)

3.3.3 TPS and DB Statistics

This section lists the TPS (Transactions Per Second) and DB (Database) statistics for BSF.

Table 3-25 TPS Statistics

Site	Rx	nbsf	Total TPS
Site1	10.04k	1.2k	11.6k
Site2	10.04k	1.2k	11.6k
Site3	10.04k	1.2k	11.6k

Table 3-26 Database Records

DB Statistics	Site1	Site2	Site3
Read Rate	8.77k	8.77k	8.08k
Write Rate	13.4k	14.1k	13.5k
Commit Rate	9.67k	9.51k	8.79k

3.3.4 Results

Table 3-27 Latency Observations

Attributes	Average Latency (ms)
Binding Create	7.4 ms
AAR-RX-INIT	13.7 ms
AAR-RX-UPDATE	0.9 ms
RX-STR	0.9 ms

3.4 Test Scenario 4: BSF Call Model deployed on Single Site setup, with 35K TPS traffic and ASM enabled

This test run benchmarks the performance and capacity of BSF call model that is deployed on a single site setup with Aspen Service Mesh (ASM) enabled. In the setup, nbsf interface handles 3.6k TPS and Rx interface handles 31.2K TPS traffic respectively.

3.4.1 Test Case and Setup Details

Table 3-28 Test Case Parameters

Parameters	Values
Call Rate	35K TPS
Call Mix	3.6k nbsf and 31.2k Rx traffic
Traffic Ratio:	Nbsf TPS - 3.6k Binding Create ratio - 1 Binding Delete ratio - 1 Rx TPS - 31.2k Rx AAR-I ratio - 1 Other Rx messages ratio (UPDATE and STR) - 2
Active User/Sessions	~18.5M
Execution Time	45 Hours

Table 3-29 BSF Microservices Resource Allocation

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod (Gi)	Memory Limit Per Pod (Gi)	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replicas
Appinfo	1	1	0.5	1	2	2	2	2	3
Audit Service	1	2	1	1	2	2	2	2	3
BSF Management Service	3	4	1	4	2	2	2	2	10
CM Service	2	4	0.5	2	2	2	2	2	3
Config Service	2	4	0.5	2	2	2	2	2	3
Diameter Gateway	3	4	0.5	2	2	2	2	2	9
Egress Gateway	3	4	4	6	2	2	2	2	3
Ingress Gateway	3	4	4	6	2	2	2	2	3

Table 3-29 (Cont.) BSF Microservices Resource Allocation

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod (Gi)	Memory Limit Per Pod (Gi)	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replicas
Nrf Client Management	1	1	1	1	2	2	2	2	3
Query Service	1	2	1	1	2	2	2	2	3
Performance	3	4	0.5	1	2	2	2	2	3

Note

Min Replica = Max Replica

Table 3-30 cnDBTier Microservices Resource Allocation

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod (Gi)	Memory Limit Per Pod (Gi)	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replicas
Management node	3	3	8	10	2	2	2	2	2
Data node	12	12	100	100	5	5	2	2	8
mysqld	4	4	16	16	4	4	4	4	4
appmysqld	12	12	20	20	5	5	6	6	3
db-monitor-service	0.2	0.2	0.5	0.5	2	2	2	2	1
db-replication-service	0.2	0.2	12	12	2	2	2	2	2
db-backup-service	0.1	0.1	0.128	0.128	0	0	0	0	1

Note

Min Replica = Max Replica

Table 3-31 BSF Features

Features Name	Feature Status
Nbsf	Enabled
Rx	Enabled

Table 3-32 Configuring Helm Parameters

cnDBTier Parameter	Value	Description
MaxNoOfExecutionThreads	5	Specifies the number of execution threads used by ndbmttd.
datamemory	78 GB	Specifies the cnDBTier ndb data memory capacity configuration.
proxy.istio.io/config	'{concurrency: 8}'	Specifies the cnDBTier App node (ndbappmysqld) istio side car configuration.
proxy.istio.io/config	'{concurrency: 8}'	Specifies the cnDBTier Data node (ndbmttd) istio side car configuration.
BSF Parameter		
proxy.istio.io/config	'{concurrency: 4}'	Specifies the BSF management service istio side car configuration.
SERVER_XNIO_TASK_THREAD_SIZE	180	Specifies the BSF management service server thread size count.

3.4.2 CPU and Memory Utilization

This section lists the CPU and memory utilization for BSF and cnDBTier microservices. The CPU utilization is the ratio between the (total CPU utilization against total CPU request (X)) versus (target CPU Utilization (Y) configured for the pod).

Table 3-33 BSF Microservices CPU and Memory Utilization

Service	CPU	Memory
Appinfo	0.0405(1.35%)	0.736(22.9%)
Audit Service	0.0147(0.245%)	1.18(36.6%)
Bsf Management Service	16.6(41.5%)	19.3(44.9%)
CM Service	0.0364(0.303%)	2.19(34.0%)
Config Server	0.134(1.19%)	2.08(32.3%)
Diameter Gateway	14.0(38.8%)	9.01(46.6%)
Egress Gateway	0.0189(0.158%)	1.94(10.0%)
Ingress Gateway	3.61(0.158%)	7.99(41.3%)
Nrf Client Management	0.0180(0.600%)	1.26(39.2%)
Query Service	0.00911(0.152%)	0.854(26.5%)
Perf Info	0.0251(0.209%)	0.354(11.0%)

Table 3-34 cnDBTier Microservices CPU and Memory Utilization.

Service	CPU	Memory
ndbappmysqld	16.8(46.6%)	2.94(11.6%)
ndbmtd	7.66(21.3%)	5.31(90.5%)
ndbmysqld	0.818(0.835%)	0.831(7.39%)
db-backup-manager-svc	0.00353(3.53%)	3.42(54.6%)
db-monitor-svc	0.0122(6.10%)	5.48(50.6%)
replication-svc	0.0811(0.405%)	5.32(3.30%)

3.4.3 TPS and DB Statistics

This section lists the TPS (Transactions Per Second) and DB (Database) statistics for BSF.

Table 3-35 TPS Statistics

Site	Rx	nbsf	Total TPS
Site1	31.2k	3.6k	34.8k

Table 3-36 Database Records

DB Statistics	Site1
Read Rate	11.8k
Write Rate	12.9k
Commit Rate	13.0k

3.4.4 Results


Table 3-37 Latency Observations

Attributes	Average Latency (ms)
Binding Create	7.6 ms
Binding Delete	8.9 ms
AAR-RX-INIT	13.9 ms
AAR-RX-UPDATE	0.8 ms
RX-STR	0.7 ms

3.5 Test Scenario 5: BSF Performance Benchmarking 47.7K TPS traffic on three-site Setup

BSF Call Flow Model: BSF Performance Benchmark for 47.7k TPS on a ASM enabled three-site georedundant setup. The following image represents the BSF deployment on a ASM enabled three-site georedundant setup.

Figure 3-2 Three-Site BSF Deployment

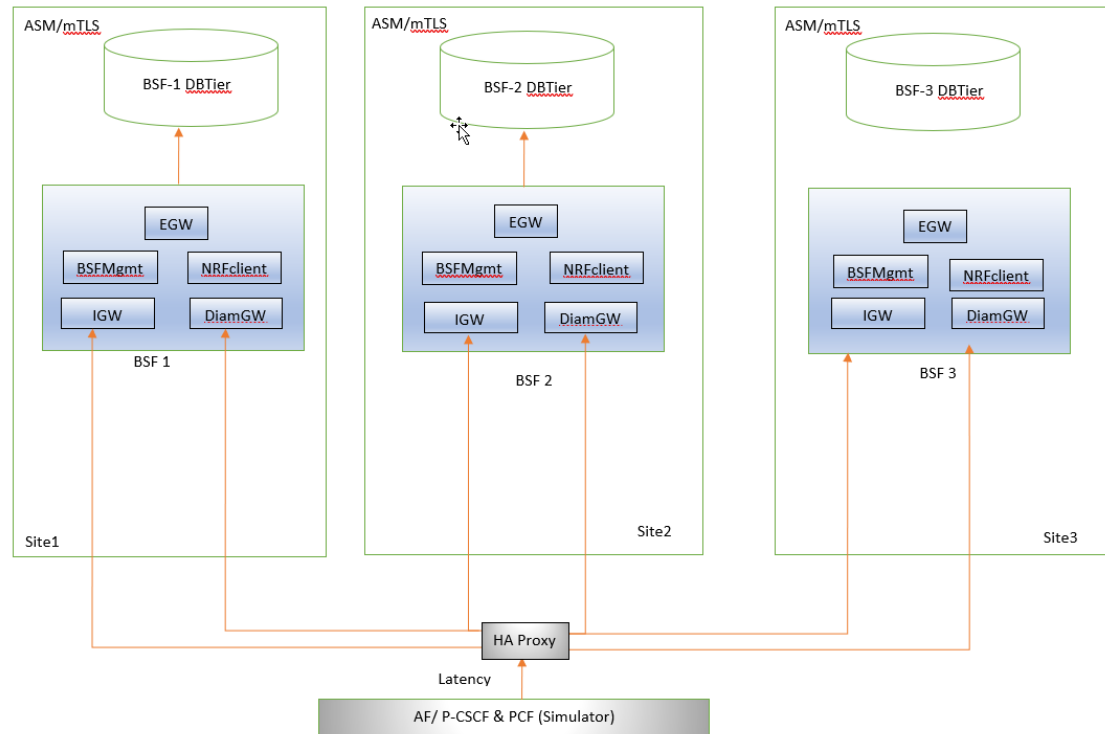

3.5.1 Test Case and Setup Details

Table 3-38 Test Case Parameters

Parameters	Values
Call Rate	47.7K TPS (Approximately, 16k TPS each site)
Call Mix	7.2k nbsf traffic (2.4K each site) and 40.5K Rx traffic (13.5K each site)
Traffic Ratio	Nbsf TPS - 2.4K Each Site Binding Create ratio - 1 Binding Delete ratio - 1 Rx TPS - 13.5K Each Site Rx AAR-I ratio - 1 Other Rx messages ratio (UPDATE and STR) - 2
Active Binding Sessions	~18500000
Execution Time	58 Hours

Table 3-39 BSF Microservices Resource Allocation

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod (Gi)	Memory Limit Per Pod (Gi)	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replicas
Appinfo	1	1	0.5	1	2	2	2	2	3

Table 3-39 (Cont.) BSF Microservices Resource Allocation

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod (Gi)	Memory Limit Per Pod (Gi)	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replicas
Audit Service	1	2	1	1	2	2	2	2	3
BSF Management Service	3	4	1	4	2	2	2	2	10
CM Service	2	4	0.5	2	2	2	2	2	3
Config Service	2	4	0.5	2	2	2	2	2	3
Diameter Gateway	3	4	0.5	2	2	2	2	2	9
Egress Gateway	3	4	4	6	2	2	2	2	3
Ingress Gateway	3	4	4	6	2	2	2	2	3
Nrf Client Management	1	1	1	1	2	2	2	2	3
Query Service	1	2	1	1	2	2	2	2	3
Performance	3	4	0.5	1	2	2	2	2	3

Note

Min Replica = Max Replica

Table 3-40 cnDBTier Microservices Resource Allocation

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod (Gi)	Memory Limit Per Pod (Gi)	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replicas
Management node	3	3	8	10	2	2	2	2	2
Data node	12	12	100	100	5	5	2	2	8
mysqld	4	4	16	16	4	4	4	4	4
appmysqld	12	12	20	20	5	5	6	6	3

Note

Min Replica = Max Replica

Table 3-41 BSF Features

Features Name	Feature Status (Enabled/Disabled)
Nbsf	Enabled
Rx	Enabled

Table 3-42 Configuring Helm Parameters

cnDBTier Parameter	Value	Description
MaxNoOfExecutionThreads	5	Specifies the number of execution threads used by ndbmtd.
MaxNoOfConcurrentScans	495	Specifies the maximum number of scans executing concurrently on ndbmtd.
datamemory	78 GB	Specifies the cnDBTier ndb data memory capacity configuration.
proxy.istio.io/config	'{concurrency: 8}'	Specifies the cnDBTier App node (ndbappmysqld) istio side car configuration.
proxy.istio.io/config	'{concurrency: 8}'	Specifies the cnDBTier Data node (ndbmtd) istio side car configuration.
BSF Parameter		
proxy.istio.io/config	'{concurrency: 4}'	Specifies the BSF management service istio side car configuration.
SERVER_XNIO_TASK_THREAD_SIZE	180	Specifies the BSF management service server thread size count.

3.5.2 CPU and Memory Utilization

This section lists the CPU and memory utilization for BSF and cnDBTier microservices. The CPU utilization is the ratio between the (total CPU utilization against total CPU request (X)) versus (target CPU Utilization (Y) configured for the pod).

The following table describes the benchmarking number as per the system maximum capacity utilization for BSF Microservices.

Table 3-43 BSF Microservices and their Resource Utilization

Service	Site1 CPU	Site1 Memory	Site2 CPU	Site2 Memory	Site3 CPU	Site3 Memory
queryservice	0.00145(0.02 41%)	788(24.5%)	0.00130(0.02 17%)	790(24.5%)	0.00130(0.02 17%)	791(24.6%)
perf-info	0.117(0.977 %)	434(13.5%)	0.117(0.973 %)	4.34(13.5%)	0.116(0.967 %)	447(13.9%)

Table 3-43 (Cont.) BSF Microservices and their Resource Utilization

Service	Site1 CPU	Site1 Memory	Site2 CPU	Site2 Memory	Site3 CPU	Site3 Memory
nrf-client-nfmanagement	0.00457(0.152%)	1.52(47.3%)	0.00519(0.173%)	1.50(46.6%)	0.00471(0.157%)	1.50(46.7%)
ingress-gateway	1.42(11.8%)	7.06(36.5%)	1.49(12.4%)	6.95(35.9%)	1.47(12.2%)	6.40(33.1%)
egress-gateway	0.00499(0.0416%)	2.49(12.9%)	0.00446(0.0371%)	2.82(14.6%)	0.00444(0.0370%)	2.69(13.9%)
diam-gateway	5.63(15.6%)	9.66(50.0%)	5.53(15.3%)	9.57(49.5%)	5.63(15.6%)	9.41(48.7%)
config-server	0.0935(0.779%)	2.50(38.9%)	0.0910(0.759%)	2.52(39.2%)	0.0890(0.742%)	2.70(42.0%)
cm-service	0.0131(0.109%)	2.08(32.2%)	0.0133(0.111%)	2.01(31.2%)	0.0128(0.107%)	2.12(32.8%)
bsf-management-service	4.24(10.6%)	15.8(36.7%)	4.37(10.9%)	15.1(35.3%)	4.30(10.7%)	16.8(39.1%)
audit-service	0.00524(0.0874%)	1.16(36.1%)	0.00497(0.0828%)	1.17(36.4%)	0.00530(0.0883%)	1.18(36.5%)
appinfo	0.0463(1.54%)	786(24.4%)	0.0466(1.55%)	797(24.7%)	0.0473(1.58%)	791(24.6%)

The following table provides information about observed values of cnDBTier services.

Table 3-44 Observed Values of cnDBTier Services

Name	Site1 CPU	Site1 Memory	Site2 CPU	Site2 Memory	Site3 CPU	Site3 Memory
ndbappmysqld	4.86(13.5%)	17.3(26.8%)	5.23(14.5%)	17.3(26.9%)	5.20(14.4%)	17.2(26.7%)
ndbmtl	4.16(11.6%)	692(80.6%)	4.48(12.4%)	691(80.5%)	4.26(11.8%)	691(80.5%)
ndbmysqld	0.329(0.214%)	67.9(6.70%)	0.337(0.219%)	67.7(6.68%)	0.327(0.212%)	67.5(6.66%)

3.5.3 TPS and DB Statistics

This section lists the TPS (Transactions Per Second) and DB (Database) Statistics for BSF and cnDBTier.

Table 3-45 Overall TPS Ingress/Egress TPS to/from NF

Site	Rx	nbsf	Total TPS
Site1	13.5K	2.4K	15.9K
Site2	13.5K	2.4K	15.9K
Site3	13.5K	2.4K	15.9K

Table 3-46 DB (Database) Statistics

DB Stats	Read Rate	Write Rate	Commit Rate
Site1	4.97K	20.3K	6.92K
Site2	5.02K	20.3K	6.92K
Site3	4.97K	20.3K	7.01K

3.5.4 Results

Table 3-47 Latency Observations


Attributes	Average Latency (ms)
Binding Create	5.2ms
Binding Delete	4.9ms
AAR-RX-INIT	8.48ms
AAR-RX-UPDATE	0.7ms
RX-STR	0.7ms

3.6 Test Scenario 6: BSF Performance Benchmarking 45K TPS traffic on a three-site Setup with traffic on one Site

BSF Call Flow Model

BSF Performance Benchmark for 45kTPS on an ASM enabled three-site georedundant setup with traffic on one site.

The following image represents the BSF deployment on an ASM enabled three-site georedundant setup:

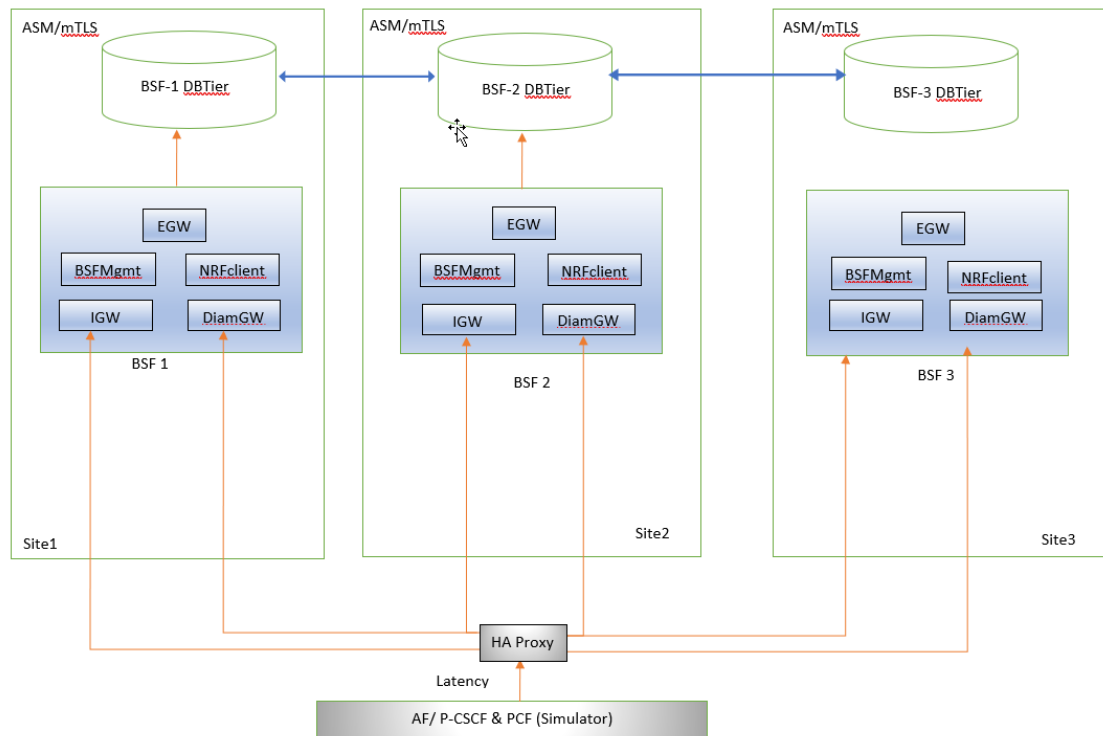Figure 3-3 ASM enabled three-site georedundant setup

3.6.1 Test Case and Setup Details

The following table describes the testcase parameters and their values:

Table 3-48 Testcase Parameters

Parameters	Values
Call Rate	45K TPS
Call Mix	Approximately, 3.6k nbsf traffic and 41.4k Rx traffic on one site
Traffic Ratio	Binding Create ratio - 1 Binding Delete ratio - 1 Rx AAR-I ratio - 1 Rx RAR ratio - 1 Rx AAR-U ratio - 1 Rx STR ratio - 1
Active Binding Sessions	~25000000
Execution Time	~7 Hours

The following table describes the resource capacity allocated to the BSF microservices:

Table 3-49 BSF microservices Resource allocation

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod	Memory Limit Per Pod	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replicas
Appinfo	1	1	1	1	2	2	2	2	4
Audit Service	2	2	1	1	2	2	2	2	4
BSF Management Service	4	4	4	4	2	2	2	2	9
CM Service	4	4	2	2	2	2	2	2	4
Config Service	4	4	2	2	2	2	2	2	4
Diameter Gateway	4	4	2	2	2	2	2	2	10
Egress Gateway	4	4	6	6	2	2	2	2	4
Ingress Gateway	4	4	6	6	2	2	2	2	4
Nrf Client Management	1	1	1	1	2	2	2	2	4
Query Service	2	2	1	1	2	2	2	2	4
Performance	4	4	1	1	2	2	2	2	4

The following table describes the resource capacity allocated to the cnDBTier microservices:

Table 3-50 cnDBTier services resource allocation

Microservice Name	CPU Request per Pod	CPU Limit Per Pod	Memory Request per Pod (Gi)	Memory Limit Per Pod (Gi)	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replica Count
Management node	3	3	10	10	2	2	2	2	2
Data node	12	12	100	100	5	5	2	2	8
mysqld	4	4	16	16	4	4	4	4	4
appmysqld	12	12	20	20	5	5	6	6	3

The following table describes the interfaces that were either enabled or disabled for this run:

Table 3-51 BSF Features

Features Name	Feature Status
Nbsf	Enabled
Rx	Enabled

The following cnDBTier and Policy helm parameters configured for this run:

Table 3-52 Configuring Helm Parameters

cnDBTier Parameter	Value	Description
MaxNoOfExecutionThreads	5	Specifies the number of execution threads used by ndbmttd.
MaxNoOfConcurrentScans	495	Specifies the maximum number of scans executing concurrently on ndbmttd.
datamemory	78 GB	Specifies the cnDBTier ndb data memory capacity configuration.
proxy.istio.io/config	'{concurrency: 8}'	Specifies the cnDBTier App node (ndbappmysqld) istio side car configuration.
proxy.istio.io/config	'{concurrency: 8}'	Specifies the cnDBTier Data node (ndbmttd) istio side car configuration.
BSF Parameter		
proxy.istio.io/config	'{concurrency: 4}'	Specifies the BSF management service istio side car configuration.

3.6.2 CPU and Memory Utilization

The following table describes the benchmarking number as per the system maximum capacity utilization for BSF Microservices.

Table 3-53 BSF Microservices and their Resource Utilization

Servi ce	Site1 CPU	Site1 Mem ory	Site1 Istio CPU	Site1 Istio Mem ory	Site2 CPU	Site2 Mem ory	Site2 Istio CPU	Site2 Istio Mem ory	Site3 CPU	Site3 Mem ory	Site3 Istio CPU	Site3 Istio Mem ory
diam- gatew ay	14.2(3 5.5%)	9.38 Bil(43. 7%)	3.11(1 5.5%)	1.96 Bil(9.1 3%)	-	-	-	-	-	-	-	-
Perfinf o	0.148(0.924 %)	591 Mil(13. .7%)	0.317(3.96%)	756 Mil(8. 81%)	-	-	-	-	-	-	-	-
Appinf o	0.105(2.63%)	2.12 Bil(49. 4%)	0.293(3.66%)	1.35 Bil(15. 7%)	-	-	-	-	-	-	-	-

Table 3-53 (Cont.) BSF Microservices and their Resource Utilization

Service	Site1 CPU	Site1 Memory	Site1 Istio CPU	Site1 Istio Memory	Site2 CPU	Site2 Memory	Site2 Istio CPU	Site2 Istio Memory	Site3 CPU	Site3 Memory	Site3 Istio CPU	Site3 Istio Memory
cm-service	0.0201(0.126%)	2.80 Bil(32.6%)	0.327(4.08%)	779 Mil(9.06%)	-	-	-	-	-	-	-	-
Config-server	0.0940(0.588%)	3.22 Bil((37.5%)	0.368(4.60%)	758 Mil(8.82%)	-	-	-	-	-	-	-	-
bsf-manage-ment-service	12.0(33.3%)	25.4 Bil(65.8%)	9.00(50.0%)	1.87 Bil(9.67%)	-	-	-	-	-	-	-	-
egress-gateway	0.00893(0.0558%)	3.22 Bil(12.5%)	0.280(3.50%)	762 Mil(8.87%)	-	-	-	-	-	-	-	-
ingress-gateway	2.81(17.6%)	7.83 Bil(30.4%)	2.08(26.0%)	832 Mil(9.68%)	-	-	-	-	-	-	-	-
nrf-client-nfmanagement	0.0106(0.265%)	1.95 Bil(45.5%)	0.299(3.74%)	769 Mil(8.96%)	-	-	-	-	-	-	-	-
audit-service	0.0539(0.673%)	1.70 Bil((39.6%)	0.294(3.68%)	779 Mil(9.07%)	-	-	-	-	-	-	-	-
query-service	0.00163(0.0204%)	1.06 Bil(24.8%)	0.277(3.47%)	748 Mil(8.71%)	-	-	-	-	-	-	-	-

The following table provides information about observed values of cnDBTier services.

Table 3-54 Observed Values of cnDBTier Services

Name	Site1 CPU	Site1 Memory	Site1 Istio CPU	Site1 Istio Memory	Site2 CPU	Site2 Memory	Site2 Istio CPU	Site2 Istio Memory	Site3 CPU	Site3 Memory	Site3 Istio CPU	Site3 Istio Memory
ndbapmyns qld	13.8 (38.3%)	41.1 Bil (63.8%)	6.47 (40.5%)	786 Mil (4.08%)	-	-	-	-	-	-	-	-
ndbmt d	7.85 (21.8%)	73.3 Bil (85.3%)	8.94 (54.9%)	1.78 Bil (9.30%)	-	-	-	-	-	-	-	-

Table 3-54 (Cont.) Observed Values of cnDBTier Services

Name	Site1 CPU	Site1 Memory	Site1 Istio CPU	Site1 Istio Memory	Site2 CPU	Site2 Memory	Site2 Istio CPU	Site2 Istio Memory	Site3 CPU	Site3 Memory	Site3 Istio CPU	Site3 Istio Memory
ndbm ysqld	0.366 (0.238 %)	68.7 Bil (6.78 %)	0.503 (0.286 %)	769 Mil (1.33 %)	-	-	-	-	-	-	-	-

3.6.3 TPS and DB Statistics

Table 3-55 Overall TPS Ingress & Egress TPS to/from NF

Site	Total TPS	Rx	Nbsf
Site1	45K	41.4K	3.6K
Site 2	-	-	-
Site 3	-	-	-

Observed values of cnDBTier Record counts:

Table 3-56 Database Records

DB Statistics	Read	Write	Commit
Site1	12.9K	14K	14.2K
Site2	-	-	-
Site3	-	-	-

3.6.4 Results

Table 3-57 Results

Attributes	Average Latency (ms)
Binding Create	7.3
Binding Delete	6.55
AAR-RX-INIT	8.4
RX-RAR	0.81
AAR-RX-UPDATE	1.07
RX-STR	0.77

Table 3-58 Average NF Latency

NF	50th Percentile (Site 1)	99th Percentile (Site 1)
Ingress Gateway	6.05 ms	16.2 ms
Egress Gateway	1.03 ms	1.15 ms

Table 3-58 (Cont.) Average NF Latency

NF	50th Percentile (Site 1)	99th Percentile (Site 1)
Diameter Gateway	-	0.368 ms

3.7 Test Scenario 7: BSF Performance Benchmarking 45K TPS traffic on a three-site Setup with traffic on Two Site

BSF Call Flow Model: BSF Performance Benchmark for 45kTPS on an ASM enabled three-site georedundant setup with traffic on two sites

3.7.1 Test Case and Setup Details

The following table describes the testcase parameters and their values:

Table 3-59 Testcase Parameters

Parameters	Values
Call Rate	45K TPS
Call Mix	3.6k nbsf(1.8K on each each site) traffic and 41.4k (20.7K each site) Rx traffic on a ASM enabled Setup.
Traffic Ratio	Binding Create ratio -1 Binding Delete ratio - 1 Rx AAR-I ratio - 1 Rx RAR ratio - 1 Rx AAR-U ratio - 1 Rx STR ratio - 1
Active Binding Sessions	~25000000
Execution Time	~17 Hours

The following table describes the resource capacity allocated to the BSF microservices:

Table 3-60 BSF microservices Resource allocation

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod	Memory Limit Per Pod	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replicas
Appinfo	1	1	1	1	2	2	2	2	4
Audit Service	2	2	1	1	2	2	2	2	4
BSF Management Service	4	4	4	4	2	2	2	2	9
CM Service	4	4	2	2	2	2	2	2	4

Table 3-60 (Cont.) BSF microservices Resource allocation

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod	Memory Limit Per Pod	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replicas
Config Service	4	4	2	2	2	2	2	2	4
Diameter Gateway	4	4	2	2	2	2	2	2	10
Egress Gateway	4	4	6	6	2	2	2	2	4
Ingress Gateway	4	4	6	6	2	2	2	2	4
Nrf Client Management	1	1	1	1	2	2	2	2	4
Query Service	2	2	1	1	2	2	2	2	4
Performance	4	4	1	1	2	2	2	2	4

The following table describes the resource capacity allocated to the cnDBTier microservices:

Table 3-61 cnDBTier services resource allocation

Microservice Name	CPU Request per Pod	CPU Limit Per Pod	Memory Request per Pod (Gi)	Memory Limit Per Pod (Gi)	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replica Count
Management node	3	3	10	10	2	2	2	2	2
Data node	12	12	100	100	5	5	2	2	8
mysqld	4	4	16	16	4	4	4	4	4
apppmysqld	12	12	20	20	5	5	6	6	3

The following table describes the interfaces that were either enabled or disabled for this run:

Table 3-62 BSF Features

Features Name	Feature Status
Nbsf	Enabled
Rx	Enabled

The following cnDBTier and Policy helm parameters configured for this run:

Table 3-63 Configuring Helm Parameters

cnDBTier Parameter	Value	Description
MaxNoOfExecutionThreads	5	Specifies the number of execution threads used by ndbmttd.
MaxNoOfConcurrentScans	495	Specifies the maximum number of scans executing concurrently on ndbmttd.
datamemory	78 GB	Specifies the cnDBTier ndb data memory capacity configuration.
proxy.istio.io/config	{'concurrency: 8'}	Specifies the cnDBTier App node (ndbappmysqld) istio side car configuration.
proxy.istio.io/config	{'concurrency: 8'}	Specifies the cnDBTier Data node (ndbmttd) istio side car configuration.
BSF Parameter		
proxy.istio.io/config	{'concurrency: 4'}	Specifies the BSF management service istio side car configuration.

3.7.2 CPU and Memory Utilization

The following table describes the benchmarking number as per the system maximum capacity utilization for BSF Microservices.

Table 3-64 BSF Microservices and their Resource Utilization

Servi ce	Site1 CPU	Site1 Mem ory	Site1 Istio CPU	Site1 Istio Mem ory	Site2 CPU	Site2 Mem ory	Site2 Istio CPU	Site2 Istio Mem ory	Site3 CPU	Site3 Mem ory	Site3 Istio CPU	Site3 Istio Mem ory
diam- gateway	7.74 (19.3 %)	7.85 Bil (36.5 %)	1.11 (5.54 %)	1.86 Bil (8.66 %)	8.42 (21.0 %)	7.94 Bil (37.0 %)	1.35 (6.44 %)	1.84 Bil (8.55 %)	-	-	-	-
Perfinf o	0.166 (1.04 %)	5.79 Mil (13.5 %)	0.024 6 (0.307 %)	710 Mil (8.27 %)	0.167 (1.04 %)	579 Mil (13.5 %)	0.026 4 (0.265 %)	713 Mil (8.30 %)	-	-	-	-
Appinf o	0.095 1 (2.38 %)	1.07 Bil (24.9 %)	0.018 6 (0.232 %)	728 Mil (8.48 %)	0.107 (2.66 %)	1.06 Bil (24.7 %)	0.019 1 (0.143 %)	726 Mil (8.45 %)	-	-	-	-
cm- servic e	0.022 2 (0.139 %)	2.82 Bil (32.8 %)	0.023 3 (0.291 %)	742 Mil (8.64 %)	0.016 1 (0.100 %)	2.77 Bil (32.3 %)	0.022 3 (0.211 %)	722 Mil (8.40 %)	-	-	-	-
Config - server	0.094 0 (0.588 %)	3.61 Bil (42.0 %)	0.095 3 (1.19 %)	737 Mil (8.58 %)	0.089 1 (0.557 %)	3.44 Bil (40.0 %)	0.088 5 (1.00 %)	730 Mil (8.49 %)	-	-	-	-

Table 3-64 (Cont.) BSF Microservices and their Resource Utilization

Service	Site1 CPU	Site1 Memory	Site1 Istio CPU	Site1 Istio Memory	Site2 CPU	Site2 Memory	Site2 Istio CPU	Site2 Istio Memory	Site3 CPU	Site3 Memory	Site3 Istio CPU	Site3 Istio Memory
bsf-manage-nt-service	5.54 (15.4 %)	25.4 Bil (65.7 %)	3.74 (20.8 %)	1.73 Bil (8.97 %)	6.43 (17.9 %)	25.8 Bil (66.7 %)	4.38 (23.6 %)	1.71 Bil (8.85 %)	-	-	-	-
egress-gateway	0.0163 (0.102 %)	3.23 Bil (12.5 %)	0.00980 (0.122 %)	719 Mil (8.37 %)	0.0134 (0.0839 %)	3.07 Bil (11.9 %)	0.0110 (0.0644 %)	712 Mil (8.39 %)	-	-	-	-
ingress-gateway	1.37 (8.55 %)	9.65 Bil (37.4 %)	0.859 (10.7 %)	964 Mil (11.2 %)	1.45 (9.05 %)	9.40 Bil (36.5 %)	0.890 (9.87 %)	850 Mil (9.90 %)	-	-	-	-
nrf-client-nfmanagement	0.00892 (0.223 %)	1.96 Bil (45.6 %)	0.0151 (0.188 %)	748 Mil (8.71 %)	0.00871 (0.218 %)	1.96 Bil (45.6 %)	0.0157 (0.119 %)	727 Mil (8.46 %)	-	-	-	-
audit-service	0.0105 (0.131 %)	1.80 Bil (42.0 %)	0.0121 (0.151 %)	754 Mil (8.77 %)	0.0103 (0.129 %)	1.73 Bil (40.2 %)	0.0139 (0.949 %)	715 Mil (8.33 %)	-	-	-	-
query-service	0.00303 (0.0379 %)	1.06 Bil (24.8 %)	0.0105 (0.132 %)	725 Mil (8.44 %)	0.00240 (0.0300 %)	1.04 Bil (24.1 %)	0.0114 (0.788 %)	715 Mil (8.32 %)	-	-	-	-

The following table provides information about observed values of cnDBTier services.

Table 3-65 Observed Values of cnDBTier Services

Name	Site1 CPU	Site1 Memory	Site1 Istio CPU	Site1 Istio Memory	Site2 CPU	Site2 Memory	Site2 Istio CPU	Site2 Istio Memory	Site3 CPU	Site3 Memory	Site3 Istio CPU	Site3 Istio Memory
ndbappmysql	6.27 (16.4 %)	38.8 Bil	3.03 (20.2 %)	770 Mil (3.94 %)	7.58 (21.1 %)	38.8 Bil (60.3 %)	3.56 (23.7 %)	774 Mil (4.01 %)	-	-	-	-
ndbmt	5.00 (12.9 %)	750 Bil	4.62 (30.8 %)	1.75 Bil (8.93 %)	5.44 (15.1 %)	748 Bil (87.1 %)	5.07 (33.8 %)	1.75 Bil (9.05 %)	-	-	-	-
ndbmysqld	0.628 (0.190 %)	68.7 Bil	0.202 (0.270 %)	747 Mil (1.23 %)	0.305 (0.198 %)	68.7 Bil (6.78 %)	0.192 (0.256 %)	755 Mil (1.30 %)	-	-	-	-

3.7.3 TPS and DB Statistics

Table 3-66 Overall TPS Ingress & Egress TPS to/from NF

Site	Total TPS	Rx	Nbsf
Site1	22.5k	20.7k	1.8k
Site2	22.5k	20.7k	1.8k
Site 3	-	-	-

Observed values of cnDBTier Record counts:

Table 3-67 Database Records

DB Statistics	Read	Write	Commit
Site1	6.25k	14k	6.59k
Site2	7.38k	14.1k	7.84k
Site3	-	-	-

3.7.4 Results

Table 3-68 Results

Attributes	Average Latency (ms)
Binding Create	5.85
Binding Delete	5.17
AAR-RX-INIT	6.73
RX-RAR	0.51
AAR-RX-UPDATE	0.57
RX-STR	0.49

Table 3-69 Average NF Latency

NF	50th Percentile (Site 1)	99th Percentile (Site 1)	50th Percentile (Site 2)	99th Percentile (Site 2)
Ingress Gateway	4.97 ms	7.93 ms	5.21 ms	9.20 ms
Egress Gateway	1.39 ms	1.54 ms	1.95 ms	2.09 ms
Diameter Gateway	-	0.0639 ms	-	0.0866 ms

3.8 Test Scenario 8: BSF Performance Benchmarking 45K TPS traffic on a three-site Setup with traffic on three Sites

BSF Call Flow Model: BSF Performance Benchmark for 45kTPS on an ASM enabled three-site georedundant setup with traffic on three sites.

3.8.1 Test Case and Setup Details

The following table describes the testcase parameters and their values:

Table 3-70 Testcase Parameters

Parameters	Values
Call Rate	45K TPS
Call Mix	Approximately, 3.6k nbsf traffic and 41.4k Rx traffic
Traffic Ratio	Binding Create ratio -1 Binding Delete ratio - 1 Rx AAR-I ratio - 1 Rx RAR ratio - 1 Rx AAR-U ratio - 1 Rx STR ratio - 1
Active Binding Sessions	~25000000
Execution Time	~40 Hours

The following table describes the resource capacity allocated to the BSF microservices:

Table 3-71 BSF microservices Resource allocation

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod	Memory Limit Per Pod	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replicas
Appinfo	1	1	1	1	2	2	2	2	4
Audit Service	2	2	1	1	2	2	2	2	4
BSF Management Service	4	4	4	4	2	2	2	2	9
CM Service	4	4	2	2	2	2	2	2	4
Config Service	4	4	2	2	2	2	2	2	4
Diameter Gateway	4	4	2	2	2	2	2	2	10
Egress Gateway	4	4	6	6	2	2	2	2	4
Ingress Gateway	4	4	6	6	2	2	2	2	4
Nrf Client Management	1	1	1	1	2	2	2	2	4
Query Service	2	2	1	1	2	2	2	2	4

Table 3-71 (Cont.) BSF microservices Resource allocation

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod	Memory Limit Per Pod	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replicas
Performance	4	4	1	1	2	2	2	2	4

The following table describes the resource capacity allocated to the cnDBTier microservices:

Table 3-72 cnDBTier services resource allocation

Microservice Name	CPU Request per Pod	CPU Limit Per Pod	Memory Request per Pod (Gi)	Memory Limit Per Pod (Gi)	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replica Count
Management node	3	3	10	10	2	2	2	2	2
Data node	12	12	100	100	5	5	2	2	8
mysqld	4	4	16	16	4	4	4	4	4
appmysqld	12	12	20	20	5	5	6	6	3

The following table describes the interfaces that were either enabled or disabled for this run:

Table 3-73 BSF Features

Features Name	Feature Status
Nbsf	Enabled
Rx	Enabled

The following cnDBTier and Policy helm parameters configured for this run:

Table 3-74 Configuring Helm Parameters

cnDBTier Parameter	Value	Description
MaxNoOfExecutionThreads	5	Specifies the number of execution threads used by ndbmttd.
MaxNoOfConcurrentScans	495	Specifies the maximum number of scans executing concurrently on ndbmttd.
datamemory	78 GB	Specifies the cnDBTier ndb data memory capacity configuration.
cnDBTier App node (ndbappmysqld) istio side car parameter (proxy.istio.io/config)	'{concurrency: 8}'	Specifies the cnDBTier App node (ndbappmysqld) istio side car configuration.

Table 3-74 (Cont.) Configuring Helm Parameters

cnDBTier Parameter	Value	Description
cnDBTier Data node (ndbmtld) istio side car parameter (proxy.istio.io/config)	'{concurrency: 8}'	Specifies the cnDBTier Data node (ndbmtld) istio side car configuration.
BSF Parameter		
proxy.istio.io/config	'{concurrency: 4}'	Specifies the BSF management service istio side car configuration.

3.8.2 CPU and Memory Utilization

The following table describes the benchmarking number as per the system maximum capacity utilization for BSF Microservices.

Table 3-75 BSF Microservices and their Resource Utilization

Servi ce	Site1 CPU	Site1 Mem ory	Site1 Istio CPU	Site1 Istio Mem ory	Site2 CPU	Site2 Mem ory	Site2 Istio CPU	Site2 Istio Mem ory	Site3 CPU	Site3 Mem ory	Site3 Istio CPU	Site3 Istio Mem ory
diam- gatew ay	5.88 (14.7 %)	8.73 Bil (40.6 %)	0.973 (4.87 %)	2.14 Bil (9.97 %)	5.58 (14.0 %)	8.38 Bil (37.5 %)	0.883 (4.42 %)	2.01 Bil (9.36 %)	5.73 (14.3 %)	8.44 Bil (39.3 %)	0.952 (4.76 %)	1.95 Bil (9.09 %)
Perfinf o	0.174 (1.09 %)	608 Mil (14.2 %)	0.030 2 (0.377 %)	745 Mil (8.67 %)	0.172 (1.07 %)	579 Mil (13.5 %)	0.035 3 (0.441 %)	757 Mil (8.81 %)	0.168 (1.05 %)	567 Mil (13.2 %)	0.033 0 (0.413 %)	749 Mil (8.72 %)
Appinf o	0.107 (2.67 %)	1.07 Bil (24.9 %)	0.025 7 (0.322 %)	745 Mil (8.67 %)	0.119 (2.98 %)	1.06 Bil (24.7 %)	0.023 8 (0.298 %)	754 Mil (8.78 %)	0.104 (2.60 %)	1.07 Bil (24.8 %)	0.025 1 (0.314 %)	756 Mil (8.80 %)
cm- servic e	0.020 (0.128 %)	2.85 Bil (33.2 %)	0.032 5 (0.406 %)	776 Mil (9.03 %)	0.018 3 (0.114 %)	2.78 Bil (32.3 %)	0.031 3 (0.392 %)	748 Mil (8.70 %)	0.019 9 (0.125 %)	2.92 Bil (34.0 %)	0.031 3 (0.39 1%)	755 Mil (8.79 %)
config - server	0.107 (0.670 %)	3.70 Bil (43.1 %)	0.105 (1.31 %)	760 Mil (8.85 %)	0.102 (0.635 %)	3.54 Bil (41.3 %)	0.101 (1.26 %)	751 Mil (8.75 %)	0.098 8 (0.617 %)	3.46 Bil (40.3 %)	0.103 (1.29 %)	777 Mil (9.04 %)
bsf- mana geme nt- servic e	4.37 (12.1 %)	28.5 Bil (73.8 %)	2.95 (16.4 %)	1.96 Bil (10.1 %)	4.20 (11.7 %)	26.7 Bil (69.0 %)	2.77 (15.4 %)	1.85 Bil (9.57 %)	4.28 (11.9 %)	25.3 Bil (65.5 %)	2.81 (15.6 %)	1.85 Bil (9.57 %)
egres s- gatew ay	0.011 8 (0.073 7%)	3.30 Bil (12.8 %)	0.020 4 (0.255 %)	743 Mil (8.65 %)	0.008 56 (0.053 5%)	3.14 Bil (12.2 %)	0.017 0 (0.213 %)	746 Mil (8.69 %)	0.010 7 (0.066 8%)	3.38 Bil (13.1 %)	0.018 3 (0.229 %)	741 Mil (8.63 %)

Table 3-75 (Cont.) BSF Microservices and their Resource Utilization

Service	Site1 CPU	Site1 Memory	Site1 Istio CPU	Site1 Istio Memory	Site2 CPU	Site2 Memory	Site2 Istio CPU	Site2 Istio Memory	Site3 CPU	Site3 Memory	Site3 Istio CPU	Site3 Istio Memory
ingress-gateway	1.03 (6.46 %)	10.3 Bil (40.1 %)	0.626 (7.82 %)	1.23 Bil (14.3 %)	1.11 (6.92 %)	9.71 Bil (37.7 %)	0.662 (8.27 %)	973 Mil (11.3 %)	0.994 (6.21 %)	6.98 Bil (27.1 %)	0.636 (7.95 %)	865 Mil (10.1 %)
nrf-client-nfmanagement	0.0161 (0.403 %)	1.97 Bil (45.9 %)	0.0212 (0.265 %)	764 Mil (8.90 %)	0.0157 (0.391 %)	1.97 Bil (45.8 %)	0.0242 (0.302 %)	754 Mil (8.78 %)	0.0139 ((0.348 %)	1.97 Bil (46.0 %)	0.0215 (0.269 %)	766 Mil (8.92 %)
audit-service	0.0499 (0.624 %)	1.88 Bil (43.7 %)	0.0358 (0.448 %)	774 Mil (9.01 %)	0.0541 (0.676 %)	1.89 Bil (43.9 %)	0.0446 (0.558 %)	751 Mil (8.75 %)	0.0180 (0.225 %)	1.85 Bil (43.1 %)	0.0194 (0.243 %)	741 Mil (8.62 %)
query-service	0.00297 (0.0371 %)	1.06 Bil (24.8 %)	0.0183 (0.228 %)	745 Mil (8.67 %)	0.00260 (0.0325 %)	1.04 Bil (24.1 %)	0.0196 (0.245 %)	740 Mil (8.61 %)	0.00262 (0.0327 %)	1.05 Bil (24.5 %)	0.0179 (0.223 %)	738 Mil (8.59 %)

The following table provides information about observed values of cnDBTier services.

Table 3-76 Observed Values of cnDBTier Services

Name	Site1 CPU	Site1 Memory	Site1 Istio CPU	Site1 Istio Memory	Site2 CPU	Site2 Memory	Site2 Istio CPU	Site2 Istio Memory	Site3 CPU	Site3 Memory	Site3 Istio CPU	Site3 Istio Memory
ndbapmysqld	4.93 (13.7 %)	59.9 Bil (93.0 %)	2.45 (16.3 %)	791 Mil (4.09 %)	14.8 (41.2 %)	60.2 Bil (85.6 %)	2.34 (15.6 %)	789 Mil (4.08 %)	4.89 (13.6 %)	47.5 Bil (75.3 %)	2.45 (16.4 %)	786 Mil (4.06 %)
ndbmtid	4.88 (13.6 %)	770 Bil (89.7 %)	4.10 (27.3 %)	1.81 Bil (9.38 %)	4.98 (13.7 %)	770 Bil (89.7 %)	3.94 (26.3 %)	1.80 Bil (9.31 %)	4.98 (13.8 %)	742 Bil (86.8 %)	4.09 (27.3 %)	1.85 Bil (9.59 %)
ndbmysqld	0.338 (0.220 %)	68.7 (6.78 %)	0.206 (0.274 %)	776 Mil (1.34 %)	0.320 (0.208 %)	68.7 Bil (6.61 %)	0.209 (0.278 %)	786 Mil (1.36 %)	0.369 (0.240 %)	39.8 Bil (5.14 %)	0.209 (0.279 %)	770 Mil (1.33 %)

3.8.3 TPS and DB Statistics

Table 3-77 Overall TPS Ingress & Egress TPS to/from NF

Site	Total TPS	Rx	Nbsf
Site1	15k	13.8k	1.2k
Site2	15k	13.8k	1.2k
Site3	15k	13.8k	1.2k

Observed values of cnDBTier Record counts:

Table 3-78 Database Records

DB Statistics	Read	Write	Commit
Site1	4.86k	14k	4.96k
Site2	4.66k	14.1k	4.76k
Site3	4.74k	14k	4.92k

3.8.4 Results

Table 3-79 Results

Attributes	Average Latency (ms)
Binding Create	6.6
Binding Delete	5.8
AAR-RX-INIT	7.57
RX-RAR	0.57
AAR-RX-UPDATE	0.63
RX-STR	0.58

Table 3-80 Average NF Latency

NF	50th Percentile (Site 1)	99th Percentile (Site 1)	50th Percentile (Site 2)	99th Percentile (Site 2)	50th Percentile (Site 3)	99th Percentile (Site 3)
Ingress Gateway	5.35 ms	11.7 ms	5.34 ms	18.5 ms	5.50 ms	10.2 ms
Egress Gateway	1.40 ms	1.53 ms	1.85 ms	1.99 ms	0.855 ms	1.15 ms
Diameter Gateway	-	0.126 ms	-	0.116 ms	-	0.346 ms


3.9 Test Scenario 9: BSF Performance Benchmarking 54K TPS traffic on a three-site Setup with traffic on one Site (25 Million Binding Sessions)

BSF Call Flow Model

BSF Performance Benchmark for 54K TPS on an ASM enabled three-site georedundant setup with traffic on one site.

The following image represents the BSF deployment on an ASM enabled three-site georedundant setup:

Figure 3-4 ASM enabled three-site georedundant setup

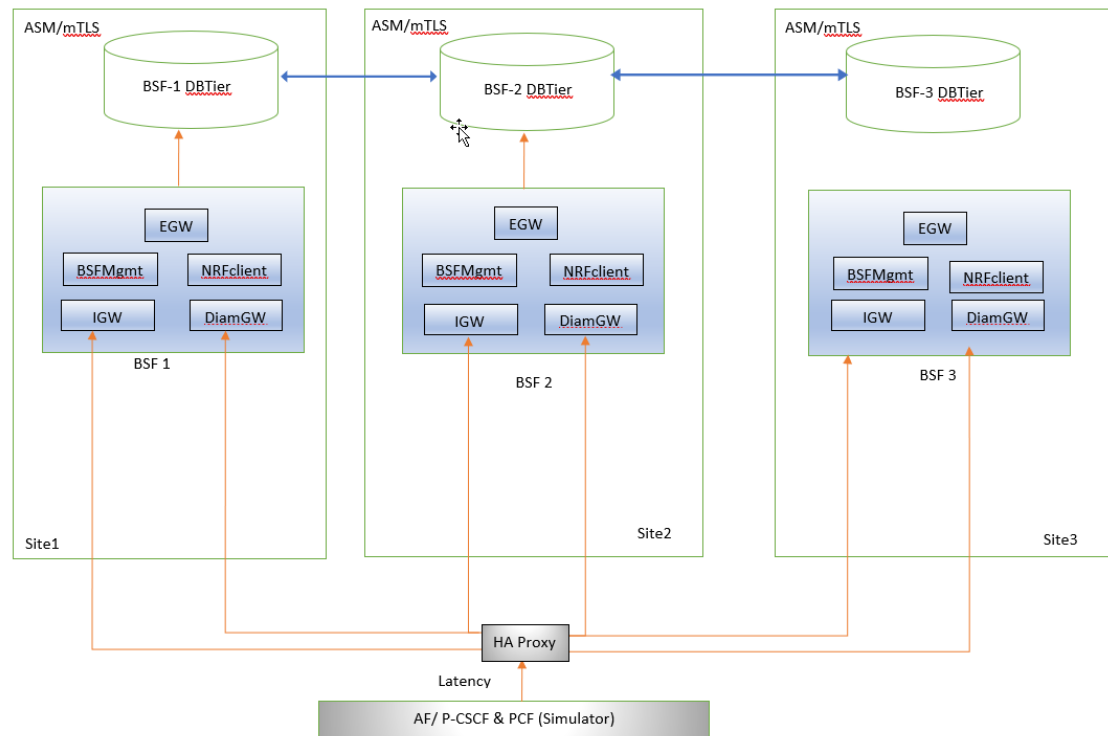

3.9.1 Test Case and Setup Details

The following table describes the testcase parameters and their values:

Table 3-81 Testcase Parameters

Parameters	Values
Call Rate	54K TPS
Call Mix	4.5k nbsf Traffic and 50k Rx traffic
Traffic Ratio	Binding Create ratio - 1 Binding Delete ratio - 1 Rx AAR-I ratio - 1 Rx RAR ratio - 1 Rx AAR-U ratio - 1 Rx STR ratio - 1
Active Binding Sessions	~25000000
Execution Time	~84 Hours

The following table describes the resource capacity allocated to the BSF microservices:

Table 3-82 BSF microservices Resource allocation

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod	Memory Limit Per Pod	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replicas
Appinfo	2	2	1	1	2	2	2	2	3
Audit Service	2	2	1	1	2	2	2	2	3
BSF Management Service	4	4	1	4	2	2	2	2	9
CM Service	4	4	1	2	2	2	2	2	3
Config Service	4	4	1	2	2	2	2	2	3
Diameter Gateway	4	4	2	2	2	2	2	2	8
Egress Gateway	4	4	4	6	2	2	2	2	3
Ingress Gateway	4	4	4	6	2	2	2	2	3
Nrf Client Management	1	1	1	1	2	2	2	2	2
Query Service	2	2	1	1	2	2	2	2	3
Performance	4	4	1	1	2	2	2	2	3

The following table describes the resource capacity allocated to the cnDBTier microservices:

Table 3-83 cnDBTier services resource allocation

Microservice Name	CPU Request per Pod	CPU Limit Per Pod	Memory Request per Pod (Gi)	Memory Limit Per Pod (Gi)	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replica Count
ndbmgmd	3	3	10	10	2	2	2	2	2
ndbmtl	12	12	100	100	5	5	2	2	8
mysqld	4	4	16	16	4	4	4	4	4
appmysqld	12	12	20	20	5	5	6	6	3

The following table describes the interfaces that were either enabled or disabled for this run:

Table 3-84 BSF Features

Features Name	Feature Status
Nbsf	Enabled
Rx	Enabled

The following cnDBTier and Policy helm parameters configured for this run:

Table 3-85 Configuring Helm Parameters

cnDBTier Parameter	Value	Description
MaxNoOfExecutionThreads	11	Specifies the number of execution threads used by ndbmttd.
MaxNoOfConcurrentScans	495	Specifies the maximum number of scans executing concurrently on ndbmttd.
datamemory	37 GB	Specifies the cnDBTier ndb data memory capacity configuration.
proxy.istio.io/config	'{concurrency: 8}'	Specifies the cnDBTier App node (ndbappmysqld) istio side car configuration.
proxy.istio.io/config	'{concurrency: 8}'	Specifies the cnDBTier Data node (ndbmttd) istio side car configuration.
BSF Parameter		
proxy.istio.io/config	'{concurrency: 4}'	Specifies the BSF management service istio side car configuration.

3.9.2 CPU and Memory Utilization

The following table describes the benchmarking number as per the system maximum capacity utilization for BSF Microservices.

Table 3-86 BSF Microservices and their Resource Utilization

Servi ce	Site1 CPU	Site1 Mem ory	Site1 Istio CPU	Site1 Istio Mem ory	Site2 CPU	Site2 Mem ory	Site2 Istio CPU	Site2 Istio Mem ory	Site3 CPU	Site3 Mem ory	Site3 Istio CPU	Site3 Istio Mem ory
diam- gateway	15.66 (48.96 %)	8.421 (52.63 %)	3.058 (19.11 %)	2.431 (15.19 %)	0.124 (0.39 %)	5.824 (36.40 %)	0.033 (0.21 %)	2.325 (14.53 %)	0.119 (0.37 %)	5.782 (36.14 %)	0.034 (0.21 %)	2.298 (14.36 %)
Perfinf o	0.130 (1.08 %)	0.400 (13.35 %)	0.012 (0.20 %)	0.749 (12.48 %)	0.126 (1.05 %)	0.399 (13.31 %)	0.012 (0.20 %)	0.737 (12.29 %)	0.111 (0.92 %)	0.404 (13.48 %)	0.011 (0.18 %)	0.746 (12.43 %)
Appinf o	0.055 (0.92 %)	0.758 (25.26 %)	0.010 (0.17 %)	0.741 (12.35 %)	0.054 (0.90 %)	0.749 (24.97 %)	0.012 (0.20 %)	0.732 (12.21 %)	0.054 (0.90 %)	0.749 (24.97 %)	0.010 (0.17 %)	0.741 (12.35 %)

Table 3-86 (Cont.) BSF Microservices and their Resource Utilization

Servi ce	Site1 CPU	Site1 Mem ory	Site1 Istio CPU	Site1 Istio Mem ory	Site2 CPU	Site2 Mem ory	Site2 Istio CPU	Site2 Istio Mem ory	Site3 CPU	Site3 Mem ory	Site3 Istio CPU	Site3 Istio Mem ory
cm- servic e	0.018 (0.15 %)	2.175 (36.25 %)	0.017 (0.28 %)	0.830 (13.83 %)	0.016 (0.13 %)	2.037 (33.95 %)	0.017 (0.28 %)	0.793 (13.22 %)	0.015 (0.12 %)	2.148 (35.81 %)	0.017 (0.28 %)	0.796 (13.26 %)
Config - server	0.110 (0.92 %)	2.527 (42.12 %)	0.093 (1.55 %)	0.831 (13.85 %)	0.100 (0.83 %)	2.410 (40.17 %)	0.082 (1.37 %)	0.805 (13.41 %)	0.089 (0.74 %)	2.488 (41.47 %)	0.077 (1.28 %)	0.794 (13.23 %)
bsf- mana geme nt- servic e	13.00 6 (36.13 %)	22.44 6 (62.35 %)	7.737 (42.98 %)	4.297 (23.87 %)	0.019 (0.05 %)	14.43 9 (40.11 %)	0.052 (0.29 %)	2.616 (14.53 %)	0.018 (0.05 %)	15.06 1 (41.83 %)	0.040 (0.22 %)	2.666 (14.81 %)
egres s- gatew ay	0.008 (0.07 %)	2.375 (13.19 %)	0.010 (0.17 %)	0.894 (14.89 %)	0.006 (0.05 %)	2.271 (12.61 %)	0.013 (0.22 %)	0.846 (14.10 %)	0.007 (0.06 %)	2.413 (13.41 %)	0.011 (0.18 %)	0.856 (14.27 %)
ingres s- gatew ay	3.271 (27.26 %)	9.154 (50.86 %)	2.084 (34.73 %)	3.658 (60.97 %)	0.034 (0.28 %)	2.626 (14.59 %)	0.012 (0.20 %)	0.846 (14.10 %)	0.027 (0.23 %)	2.633 (14.63 %)	0.012 (0.20 %)	0.850 (14.16 %)
nrf- client- nfman agem ent	0.006 (0.30 %)	0.982 (49.12 %)	0.007 (0.18 %)	0.532 (13.31 %)	0.007 (0.35 %)	0.959 (47.95 %)	0.006 (0.15 %)	0.534 (13.35 %)	0.007 (0.35 %)	0.964 (48.19 %)	0.007 (0.18 %)	0.531 (13.28 %)
audit- servic e	0.004 (0.07 %)	1.069 (35.64 %)	0.025 (0.42 %)	0.741 (12.35 %)	0.005 (0.08 %)	1.081 (36.04 %)	0.008 (0.13 %)	0.733 (12.22 %)	0.003 (0.05 %)	1.073 (35.77 %)	0.008 (0.13 %)	0.735 (12.26 %)
query servic e	0.003 (0.05 %)	0.703 (23.44 %)	0.007 (0.12 %)	0.746 (12.43 %)	0.003 (0.05 %)	0.706 (23.54 %)	0.008 (0.13 %)	0.743 (12.39 %)	0.008 (0.13 %)	0.737 (12.29 %)	0.015 (0.12 %)	2.148 (35.81 %)

The following table provides information about observed values of cnDBTier services.

Table 3-87 Observed Values of cnDBTier Services

Name	Site1 CPU	Site1 Mem ory	Site1 Istio CPU	Site1 Istio Mem ory	Site2 CPU	Site2 Mem ory	Site2 Istio CPU	Site2 Istio Mem ory	Site3 CPU	Site3 Mem ory	Site3 Istio CPU	Site3 Istio Mem ory
ndbap pmys qlid	17.69 9 (73.75 %)	14.83 5 (32.97 %)	5.412 (60.13 %)	1.071 (17.85 %)	0.153 (0.64 %)	12.69 7 (28.22 %)	0.137 (1.52 %)	1.031 (17.19 %)	0.132 (0.55 %)	12.75 6 (28.35 %)	0.133 (1.48 %)	1.074 (17.90 %)
ndbmt d	17.23 1 (17.95 %)	325.1 02 (63.50 %)	14.50 1 (36.25 %)	2.490 (15.56 %)	5.671 (5.91 %)	323.8 87 (63.26 %)	1.745 (4.36 %)	2.434 (15.21 %)	6.554 (6.83 %)	323.8 33 (63.25 %)	1.640 (4.10 %)	2.412 (15.08 %)

Table 3-87 (Cont.) Observed Values of cnDBTier Services

Name	Site1 CPU	Site1 Memory	Site1 Istio CPU	Site1 Istio Memory	Site2 CPU	Site2 Memory	Site2 Istio CPU	Site2 Istio Memory	Site3 CPU	Site3 Memory	Site3 Istio CPU	Site3 Istio Memory
ndbm ysqld	0.526 (3.29 %)	16.39 6 (25.62 %)	0.328 (4.10 %)	1.074 (13.43 %)	0.405 (2.53 %)	15.00 3 (23.44 %)	0.280 (3.50 %)	1.048 (13.10 %)	0.365 (2.28 %)	14.97 6 (23.40 %)	0.290 (3.62 %)	1.064 (13.31 %)

3.9.3 TPS and DB Statistics

Table 3-88 Overall TPS Ingress & Egress TPS to/from NF

Site	Total TPS	Rx	Nbsf
Site1	54K	50K	4.5K
Site 2	-	-	-
Site 3	-	-	-

Observed values of cnDBTier Record counts:

Table 3-89 Database Records

DB Statistics	Read	Write	Commit
Site1	9.05K	6.10K	2.14K
Site2	-	-	-
Site3	-	-	-

3.9.4 Results

Table 3-90 Results

Attributes	Average Latency (ms)
Binding Create	16.1
Binding Delete	18.2
AAR-RX-INIT	16.9
RX-RAR	0.7
AAR-RX-UPDATE	0.6
RX-STR	0.4


3.10 Test Scenario 10: BSF Performance Benchmarking 54K TPS traffic on a three-site Setup with traffic on one Site (50 Million Binding Sessions)

BSF Call Flow Model

BSF Performance Benchmark for 54K TPS on an ASM enabled three-site georedundant setup with traffic on one site.

The following image represents the BSF deployment on an ASM enabled three-site georedundant setup:

Figure 3-5 ASM enabled three-site georedundant setup

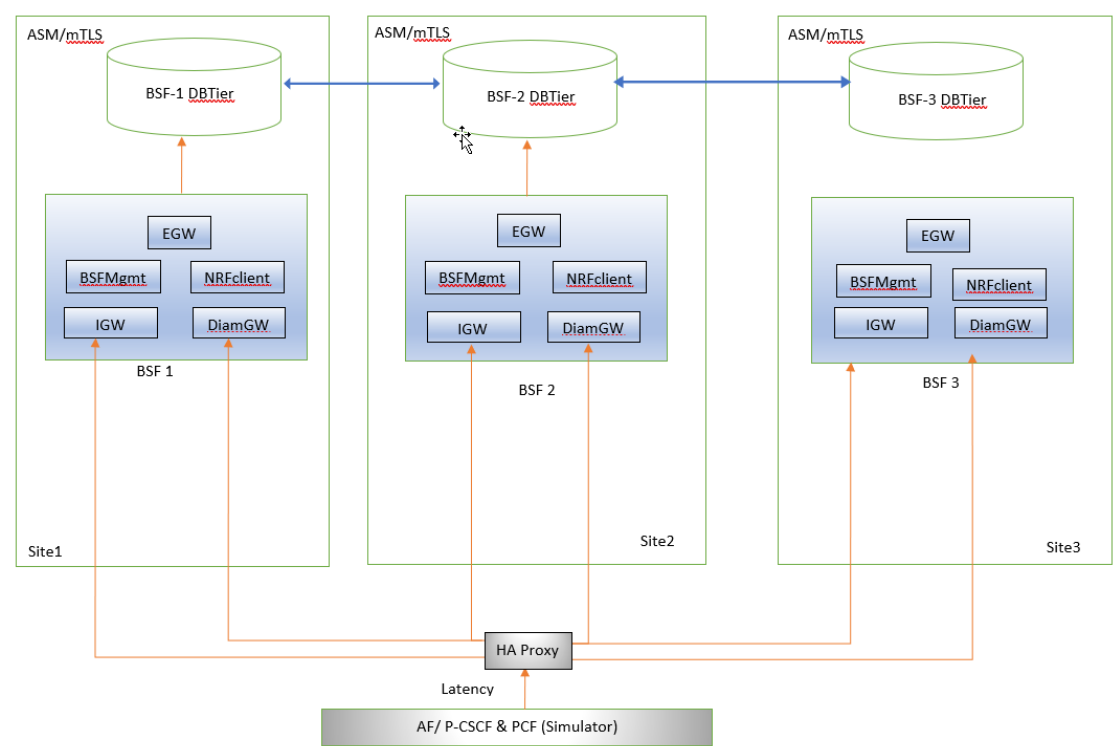

3.10.1 Test Case and Setup Details

The following table describes the testcase parameters and their values:

Table 3-91 Testcase Parameters

Parameters	Values
Call Rate	54K TPS
Call Mix	4.5k nbsf Traffic and 50k Rx traffic

Table 3-91 (Cont.) Testcase Parameters

Parameters	Values
Traffic Ratio	Binding Create ratio - 1 Binding Delete ratio - 1 Rx AAR-I ratio - 1 Rx RAR ratio - 1 Rx AAR-U ratio - 1 Rx STR ratio - 1
Active Binding Sessions	~50000000
Execution Time	~15 Hours

The following table describes the resource capacity allocated to the BSF microservices:

Table 3-92 BSF microservices Resource allocation

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod	Memory Limit Per Pod	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replicas
Appinfo	2	2	1	1	2	2	2	2	3
Audit Service	2	2	1	1	2	2	2	2	3
BSF Management Service	4	4	1	4	2	2	2	2	9
CM Service	4	4	1	2	2	2	2	2	3
Config Service	4	4	1	2	2	2	2	2	3
Diameter Gateway	4	4	2	2	2	2	2	2	8
Egress Gateway	4	4	4	6	2	2	2	2	3
Ingress Gateway	4	4	4	6	2	2	2	2	3
Nrf Client Management	1	1	1	1	2	2	2	2	2
Query Service	2	2	1	1	2	2	2	2	3
Performance	4	4	1	1	2	2	2	2	3

The following table describes the resource capacity allocated to the cnDBTier microservices:

Table 3-93 cnDBTier services resource allocation

Microservice Name	CPU Request per Pod	CPU Limit Per Pod	Memory Request per Pod (Gi)	Memory Limit Per Pod (Gi)	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replica Count
ndbmcmd	3	3	10	10	2	2	2	2	2
ndbmtdd	12	12	100	100	5	5	2	2	8
mysqld	4	4	16	16	4	4	4	4	4
appmysqld	12	12	20	20	5	5	6	6	3

The following table describes the interfaces that were either enabled or disabled for this run:

Table 3-94 BSF Features

Features Name	Feature Status
Nbsf	Enabled
Rx	Enabled

The following cnDBTier and Policy helm parameters configured for this run:

Table 3-95 Configuring Helm Parameters

cnDBTier Parameter	Value	Description
MaxNoOfExecutionThreads	11	Specifies the number of execution threads used by ndbmtdd.
MaxNoOfConcurrentScans	495	Specifies the maximum number of scans executing concurrently on ndbmtdd.
datamemory	37 GB	Specifies the cnDBTier ndb data memory capacity configuration.
proxy.istio.io/config	'{concurrency: 8}'	Specifies the cnDBTier App node (ndbappmysqld) istio side car configuration.
proxy.istio.io/config	'{concurrency: 8}'	Specifies the cnDBTier Data node (ndbmtdd) istio side car configuration.
BSF Parameter		
proxy.istio.io/config	'{concurrency: 4}'	Specifies the BSF management service istio side car configuration.

3.10.2 CPU and Memory Utilization

The following table describes the benchmarking number as per the system maximum capacity utilization for BSF Microservices.

Table 3-96 BSF Microservices and their Resource Utilization

Servi ce	Site1 CPU	Site1 Mem ory	Site1 Istio CPU	Site1 Istio Mem ory	Site2 CPU	Site2 Istio Mem ory	Site2 Istio CPU	Site2 Istio Mem ory	Site3 CPU	Site3 Mem ory	Site3 Istio CPU	Site3 Istio Mem ory
diam- gatew ay	14.7 (45.9 %)	9.13 (53.2 %)	2.76 (17.2 %)	3.19 (18.6 %)	0.196 (0.615 %)	7.29 (42.4 %)	0.036 8 (0.23 0 %)	2.90 (16.9 %)	0.191 (0.597 %)	7.01 (40 %)	0.035 8 (0.224 %)	2.85 (16.6 %)
Perfinf o	0.114 (0.952 %)	0.439 (13.6 %)	0.012 5 (0.209 %)	0.914 (14.2 %)	0.112 (0.940 %)	0.395 (12.2 %)	0.011 9 (0.198 %)	0.932 (14.5 %)	0.112 (0.976 %)	0.395 (12.3 %)	0.012 7 (0.211 %)	0.962 (14.9 %)
Appinf o	0.049 2 (0.821 %)	0.814 (25.3 %)	0.008 68 (0.145 %)	0.925 (14.4 %)	0.055 (0.891 %)	0.803 (24.9 %)	0.008 06 (0.134 %)	0.926 (14.4 %)	0.057 4 (0.953 %)	0.799 (24.8 %)	0.008 (0.133 %)	0.930 (14.4 %)
cm- servic e	0.013 (0.113 %)	1.99 (30.9 %)	0.017 0 (0.284 %)	1.02 (15.9 %)	0.139 (0.115 %)	2.01 (3.11 %)	0.015 3 (0.255 %)	1.04 (16.2 %)	0.013 6 (0.114 %)	2.01 (31.3 %)	0.015 (0.25 %)	1.04 (16.1 %)
Config - server	0.102 (0.85 %)	2.47 (38.2 %)	0.086 9 (1.45 %)	1.00 (15.6 %)	0.091 4 (0.755 %)	2.56 (39.7 %)	0.084 2 (1.40 %)	1.04 (16.1 %)	0.089 0 (0.723 %)	2.61 (40.6 %)	0.081 1 (1.35 %)	1.02 (15.9 %)
bsf- mana geme nt- servic e	13.1 (36.3 %)	26.9 (69.6 %)	7.83 (43.5 %)	3.84 (19.8 %)	0.011 7 (0.032 8 %)	15.1 (39.0 %)	0.050 5 (0.280 %)	3.32 (17.2 %)	0.011 6 (0.084 9 %)	15.5 (40.0 %)	0.045 5 (0.253 %)	3.35 (17.3 %)
egres s- gatew ay	0.006 (0.05 %)	2.71 (14 %)	0.011 3 (0.188 %)	1.07 (16.7 %)	0.005 45 (0.045 5 %)	2.16 (11.2 %)	0.012 1 (0.202 %)	1.08 (16.7 %)	0.005 73 (0.047 8 %)	2.14 (11.1 %)	0.009 36 (0.156 %)	1.07 (16.5 %)
ingres s- gatew ay	3.35 (27.9 %)	8.37 (43.3 %)	2.17 (36.1 %)	1.65 (25.6 %)	0.034 3 (0.285 %)	4.19 (21.7 %)	0.017 2 (0.286 %)	1.08 (16.8 %)	0.032 5 (0.271 %)	4.18 (21.6 %)	0.015 0 (0.249 %)	1.09 (17.0 %)
nrf- client- nfman agem ent	0.005 40 (0.27 %)	1.05 (49 %)	0.005 68 (0.142 %)	0.653 (15.2 %)	0.005 58 (0.279 %)	1.02 (47.7 %)	0.006 91 (0.173 %)	0.656 (15.3 %)	0.005 71 (0.286 %)	1.02 (47.7 %)	0.005 69 (0.142 %)	0.654 (15.2 %)
audit- servic e	0.007 89 (0.132 %)	1.62 (50.3 %)	0.006 61 (0.110 %)	0.933 (14.5 %)	0.003 23 (0.053 6 %)	1.46 (46.4 %)	0.006 14 (0.102 %)	0.942 (14.6 %)	0.003 25(0.0 541 %)	1.49 (46.4 %)	0.007 87 (0.131 %)	0.940 (14.6 %)
query servic e	0.001 40 (0.023 3 %)	0.745 (23.1 %)	0.005 80 (0.096 7 %)	0.921 (14.3 %)	0.002 04 (0.033 5 %)	0.810 (25.2 %)	0.006 13 (0.102 %)	0.923 (14.3 %)	0.001 63 (0.027 3 %)	0.798 (24.8 %)	0.006 44 (0.107 %)	0.926 (14.4 %)

The following table provides information about observed values of cnDBTier services.

Table 3-97 Observed Values of cnDBTier Services

Name	Site1 CPU	Site1 Mem ory	Site1 Istio CPU	Site1 Istio Mem ory	Site2 CPU	Site2 Mem ory	Site2 Istio CPU	Site2 Istio Mem ory	Site3 CPU	Site3 Mem ory	Site3 Istio CPU	Site3 Istio Mem ory
ndbap pmys qld	17.6 (73.2 %)	14.3 (29.6 %)	5.54 (61.6 %)	1.19 (18.4 %)	0.141 (0.391 %)	8.22 (12.8 %)	0.131 (0.872 %)	1.19 (6.14 %)	0.139 (0.387 %)	8.19 (12.7 %)	0.132 (0.881 %)	1.18 (6.09 %)
ndbmt d	17.7 (73.9 %)	439 (79.9 %)	14.0 (156 %)	2.90 (45.1 %)	5.65 (15.7 %)	786 (91.5 %)	1.09 (7.27 %)	2.97 (15.3 %)	5.85 (16.2 %)	786 (91.4 %)	1.32 (8.80 %)	2.94 (15.2 %)
ndbm ysqld	0.527 (0.371 %)	68.7 (9.98 %)	0.31 (0.530 %)	1.24 (3.40 %)	0.416 (0.270 %)	13.3 (1.31 %)	0.310 (0.414 %)	1.48 (2.55 %)	0.410 (0.267 %)	7.03 (0.694 %)	0.310 (0.414 %)	1.49 (2.57 %)

3.10.3 TPS and DB Statistics

Table 3-98 Overall TPS Ingress & Egress TPS to/from NF

Site	Total TPS	Rx	Nbsf
Site1	54K	50K	4.5K
Site 2	-	-	-
Site 3	-	-	-

Observed values of cnDBTier Record counts:

Table 3-99 Database Records

DB Statistics	Read	Write	Commit
Site1	9.05K	6.08K	2.13K
Site2	-	-	-
Site3	-	-	-

3.10.4 Results

Table 3-100 Results

Attributes	Average Latency (ms)
Binding Create	11.2
Binding Delete	12.8
AAR-RX-INIT	18.2
RX-RAR	0.6
AAR-RX-UPDATE	0.5
RX-STR	0.4


3.11 BSF Performance Benchmarking 54K TPS traffic on a Four-site Setup with traffic on one Site (Congestion Disabled)

BSF Call Flow Model

BSF Performance Benchmark for 54K TPS on an ASM enabled four-site georedundant setup with traffic on one site.

The following image represents the BSF deployment on an ASM enabled four-site georedundant setup:

Figure 3-6 ASM Enabled Four-site Georedundant Setup

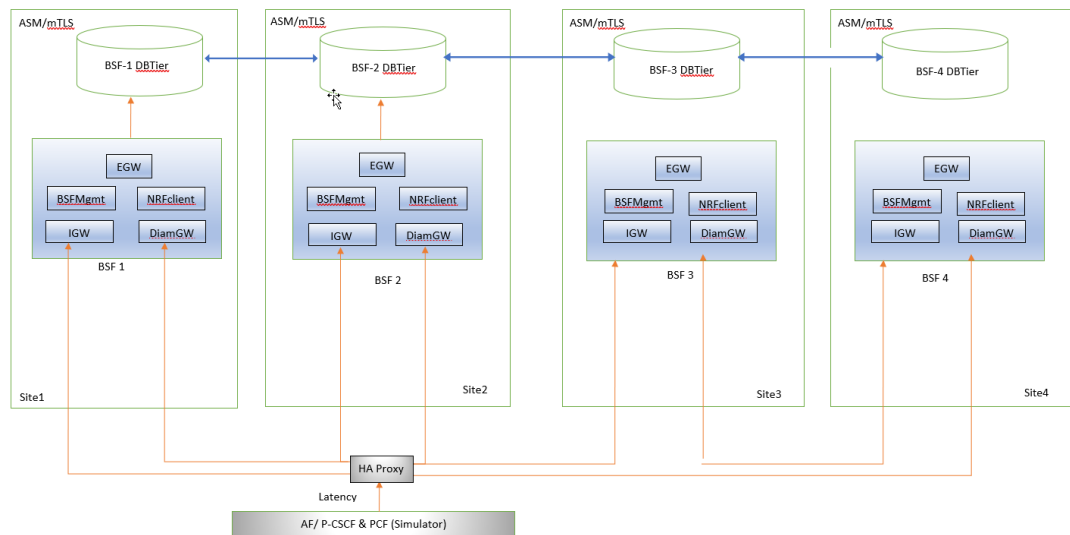

3.11.1 Test Case and Setup Details

The following table describes the testcase parameters and their values:

Table 3-101 Testcase Parameters

Parameters	Values
Call Rate	54K TPS
Call Mix	4.5k nbsf Traffic and 50k Rx traffic
Traffic Ratio	Binding Create ratio -1 Binding Delete ratio - 1 Rx AAR-I ratio - 1 Rx RAR ratio - 1 Rx AAR-U ratio - 1 Rx STR ratio - 1
Active Binding Sessions	~50000000
Execution Time	~72 Hours

The following table describes the resource capacity allocated to the BSF microservices:

Table 3-102 BSF microservices Resource allocation

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod	Memory Limit Per Pod	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replicas
Appinfo	2	2	1	1	2	2	2	2	3
Audit Service	2	2	1	1	2	2	2	2	3
BSF Management Service	4	4	1	4	2	2	2	2	9
CM Service	4	4	1	2	2	2	2	2	3
Config Service	4	4	1	2	2	2	2	2	3
Diameter Gateway	4	4	2	2	2	2	2	2	8
Egress Gateway	4	4	4	6	2	2	2	2	3
Ingress Gateway	4	4	4	6	2	2	2	2	3
Nrf Client Management	1	1	1	1	2	2	2	2	2
Query Service	2	2	1	1	2	2	2	2	3
Performance	4	4	1	1	2	2	2	2	3

The following table describes the resource capacity allocated to the cnDBTier microservices:

Table 3-103 cnDBTier services resource allocation

Microservice Name	CPU Request per Pod	CPU Limit Per Pod	Memory Request per Pod (Gi)	Memory Limit Per Pod (Gi)	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replica Count
ndbmgmd	3	3	10	10	2	2	2	2	2
ndbmtl	12	12	100	100	5	5	2	2	8
mysqld	4	4	16	16	4	4	4	4	4
appmysqld	12	12	20	20	5	5	6	6	3

The following table describes the interfaces that were either enabled or disabled for this run:

Table 3-104 BSF Features

Features Name	Feature Status
Nbsf	Enabled
Rx	Enabled

The following cnDBTier and Policy helm parameters configured for this run:

Table 3-105 Configuring Helm Parameters

cnDBTier Parameter	Value	Description
MaxNoOfExecutionThreads	11	Specifies the number of execution threads used by ndbmttd.
MaxNoOfConcurrentScans	495	Specifies the maximum number of scans executing concurrently on ndbmttd.
datamemory	37 GB	Specifies the cnDBTier ndb data memory capacity configuration.
proxy.istio.io/config	'{concurrency: 8}'	Specifies the cnDBTier App node (ndbappmysqld) istio side car configuration.
proxy.istio.io/config	'{concurrency: 8}'	Specifies the cnDBTier Data node (ndbmttd) istio side car configuration.
BSF Parameter		
proxy.istio.io/config	'{concurrency: 4}'	Specifies the BSF management service istio side car configuration.

3.11.2 CPU and Memory Utilization

The following table describes the benchmarking number as per the system maximum capacity utilization for BSF Microservices.

BSF Microservices and their Resource Utilization

The following table describes the benchmarking number as per the system maximum capacity utilization for BSF Microservices.

Ser vice	Site 1 CP U	Site 1 Me mor y	Site 1 Isti o CP U	Site 1 Isti o Me mor y	Site 2 CP U	Site 2 Me mor y	Site 2 Isti o CP U	Site 2 Isti o Me mor y	Site 3 CP U	Site 3 Me mor y	Site 3 Isti o CP U	Site 3 Isti o Me mor y	Site 4 CP U	Site 4 Me mor y	Site 4 Isti o CP U	Site 4 Isti o Me mor y
dia m- gate way	16.036 (50.11%)	10.645 (66.53%)	6.384 (39.90%)	2.750 (17.19%)	0.075 (0.47%)	3.136 (39.20%)	0.024 (0.30%)	1.155 (14.44%)	0.061 (0.38%)	2.508 (31.35%)	0.022 (0.27%)	1.136 (14.20%)	0.059 (0.37%)	2.328 (29.10%)	0.042 (0.53%)	1.191 (14.89%)

Service	Site 1 CP U	Site 1 Memory	Site 1 I/O CP U	Site 1 I/O Memory	Site 2 CP U	Site 2 Memory	Site 2 I/O CP U	Site 2 I/O Memory	Site 3 CP U	Site 3 Memory	Site 3 I/O CP U	Site 3 I/O Memory	Site 4 CP U	Site 4 Memory	Site 4 I/O CP U	Site 4 I/O Memory
Perfinfo	0.115 (0.96%)	0.412 (13.74%)	0.012 (0.20%)	0.846 (14.10%)	0.083 (1.04%)	0.272 (13.62%)	0.009 (0.22%)	0.492 (12.30%)	0.013 (0.22%)	0.732 (12.21%)	0.002 (0.05%)	0.621 (31.05%)	0.002 (0.05%)	0.620 (31.01%)	0.005 (0.12%)	0.490 (12.26%)
Appinfo	0.056 (0.93%)	0.763 (25.42%)	0.011 (0.18%)	0.820 (13.67%)	0.038 (0.95%)	0.497 (24.85%)	0.007 (0.18%)	0.512 (12.79%)	0.034 (0.85%)	0.507 (25.34%)	0.007 (0.18%)	0.487 (12.18%)	0.028 (0.70%)	0.508 (25.39%)	0.007 (0.18%)	0.490 (12.26%)
cm-service	0.020 (0.17%)	2.216 (36.93%)	0.018 (0.30%)	0.888 (14.79%)	0.011 (0.14%)	1.257 (31.42%)	0.012 (0.30%)	0.547 (13.67%)	0.012 (0.10%)	1.860 (31.01%)	0.014 (0.23%)	0.814 (13.57%)	0.010 (0.12%)	1.399 (34.99%)	0.015 (0.38%)	0.564 (14.11%)
Config-server	0.115 (0.96%)	2.527 (42.12%)	0.085 (1.42%)	0.899 (14.99%)	0.056 (0.70%)	1.508 (37.70%)	0.045 (1.12%)	0.544 (13.60%)	0.047 (0.59%)	1.493 (37.33%)	0.037 (0.92%)	0.536 (13.40%)	0.053 (0.66%)	1.583 (39.58%)	0.047 (1.18%)	0.553 (13.82%)
bsf-manage-ment-service	13.145 (36.51%)	23.284 (64.68%)	7.855 (43.64%)	3.112 (17.29%)	0.093 (0.58%)	4.022 (25.14%)	0.056 (0.70%)	1.182 (14.77%)	0.007 (0.04%)	4.583 (28.64%)	0.016 (0.20%)	1.174 (14.67%)	0.008 (0.05%)	3.684 (23.02%)	0.022 (0.27%)	1.189 (14.87%)
egress-gateway	0.095 (0.79%)	2.789 (15.49%)	0.039 (0.65%)	0.990 (16.50%)	0.085 (1.06%)	1.696 (14.14%)	0.031 (0.78%)	0.581 (14.53%)	0.006 (0.07%)	1.762 (14.68%)	0.008 (0.20%)	0.573 (14.33%)	[0.006 (0.07%)	1.861 (15.51%)	0.009 (0.22%)	0.589 (14.72%)
ingress-gateway	3.301 (27.51%)	6.412 (35.62%)	2.006 (33.43%)	1.103 (18.38%)	0.026 (0.33%)	1.909 (15.91%)	0.010 (0.25%)	0.571 (14.28%)	0.023 (0.29%)	1.875 (15.62%)	0.012 (0.30%)	0.562 (14.04%)	[0.028 (0.35%)	1.904 (15.87%)	0.016 (0.40%)	0.571 (14.28%)
nrf-client-nfm-anagement	0.006 (0.30%)	1.006 (50.29%)	0.007 (0.18%)	0.684 (17.09%)	0.007 (0.35%)	0.985 (49.27%)	0.007 (0.18%)	0.526 (13.16%)	0.007 (0.35%)	0.994 (49.71%)	0.006 (0.15%)	0.532 (13.31%)	[0.006 (0.30%)	[0.973 (48.63%)	0.006 (0.15%)	[0.533 (13.33%)
audit-service	0.024 (0.40%)	1.235 (41.18%)	0.025 (0.42%)	0.854 (14.23%)	0.020 (0.50%)	0.862 (43.12%)	0.025 (0.62%)	0.508 (12.70%)	0.004 (0.10%)	0.729 (36.43%)	0.007 (0.18%)	0.496 (12.40%)	[0.004 (0.10%)	[0.711 (35.55%)	[0.008 (0.20%)	[0.490 (12.26%)

Service	Site 1 CP U	Site 1 Memory	Site 1 Istio o CP U	Site 1 Istio o Memory	Site 2 CP U	Site 2 Memory	Site 2 Istio o CP U	Site 2 Istio o Memory	Site 3 CP U	Site 3 Memory	Site 3 Istio o CP U	Site 3 Istio o Memory	Site 4 CP U	Site 4 Memory	Site 4 Istio o CP U	Site 4 Istio o Memory
quer y service	0.00 3 (0.0 5%)	0.92 3 (30. 76%)	0.00 7 (0.1 2%)	0.81 9 (13. 66%)	0.00 2 (0.0 5%)	0.61 5 (30. 76%)	0.00 5 (0.1 2%)	0.49 8 (12. 45%)	0.00 2 (0.0 5%)	0.62 1 (31. 05%)	0.00 6 (0.1 5%)	0.49 3 (12. 33%)	0.00 02 (0.0 5%)	0.62 0 (31. 01%)	0.00 5 (0.1 2%)	0.49 0 (12. 26%)

Observed Values of cnDBTier Services

The following table provides information about observed values of cnDBTier services.

Service	Site 1 CP U	Site 1 Memory	Site 1 Istio CP U	Site 1 Istio Memory	Site 2 CP U	Site 2 Memory	Site 2 Istio CP U	Site 2 Istio Memory	Site 3 CP U	Site 3 Memory	Site 3 Istio CP U	Site 3 Istio Memory	Site 4 CP U	Site 4 Memory	Site 4 Istio CP U	Site 4 Istio Memory
ndb app mys qld	17.8 26 (74. 28%)	14.1 17 (31. 37%)	6.90 9 (76. 77%)	1.32 2 (22. 04%)	0.15 2 (0.6 3%)	12.3 61 (27. 47%)	0.11 0 (1.2 2%)	1.29 3 (21. 55%)	0.11 0 (1.2 2%)	1.29 3 (21. 55%)	0.08 3 (0.9 2%)	1.24 9 (20. 82%)	0.09 3 (0.3 9%)	11.5 59 (25. 69%)	0.08 1 (0.9 0%)	1.23 7 (20. 62%)
ndb mtd	17.9 60 (18. 71%)	324. 243 (63. 33%)	16.1 06 (40. 27%)	3.09 1 (19. 32%)	7.35 3 (7.6 6%)	324. 522 (63. 38%)	1.61 7 (4.0 4%)	3.11 6 (19. 48%)	7.63 6 (7.9 5%)	324. 854 (63. 45%)	1.69 5 (4.2 4%)	3.12 3 (19. 52%)	7.30 5 (7.6 1%)	324. 876 (63. 45%)	1.59 9 (4.0 0%)	3.19 1 (19. 95%)
ndb mys qld	0.81 8 (3.4 1%)	24.8 10 (25. 84%)	0.51 3 (4.2 8%)	1.93 8 (16. 15%)	0.48 7 (2.0 3%)	22.6 04 (23. 55%)	0.3 83 (3.1 9%)	1.97 2 (16. 43%)	0.46 6 (1.9 4%)	22.3 77 (23. 31%)	0.40 7 (3.3 9%)	1.91 6 (15. 97%)	0.46 7 (1.9 5%)	22.2 98 (23. 23%)	0.40 0 (3.3 3%)	1.93 8 (16. 15%)

3.11.3 TPS and DB Statistics

Table 3-106 Overall TPS Ingress & Egress TPS to/from NF

Site	Total TPS	Rx	Nbsf
Site1	54K	50K	4.5K
Site 2	-	-	-
Site 3	-	-	-
Site 4	-	-	-

Observed values of cnDBTier Record counts:

Table 3-107 Database Records

DB Statistics	Read	Write	Commit
Site1	9.05K	6.25K	2.25K
Site2	-	-	-
Site3	-	-	-
Site4	-	-	-

Replication Delay

Observed values of latency on replication channels:

DB Statistics	Latency Min (Seconds)	Latency Max (Seconds)
Site1	0	0
Site2	0	1
Site3	0	1
Site4	0	1

3.11.4 Results

Table 3-108 Results


Attributes	Average Latency (ms)
Binding Create	8.3
Binding Delete	8.1
AAR-RX-INIT	10.4
RX-RAR	0.9
AAR-RX-UPDATE	0.5
RX-STR	0.5

3.12 BSF Performance Benchmarking 54K TPS traffic on a Four-site Setup with traffic on one Site (Congestion Enabled)

BSF Call Flow Model

BSF Performance Benchmark for 54K TPS on an ASM enabled four-site georedundant setup with traffic on one site.

The following image represents the BSF deployment on an ASM enabled four-site georedundant setup:

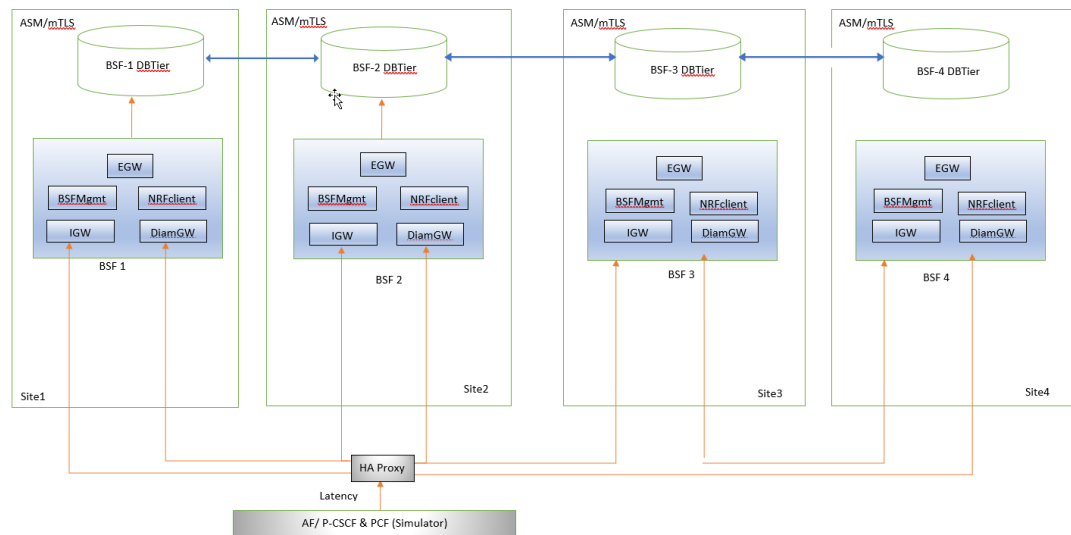Figure 3-7 ASM Enabled Four-site Georedundant Setup

3.12.1 Test Case and Setup Details

The following table describes the testcase parameters and their values:

Table 3-109 Testcase Parameters

Parameters	Values
Call Rate	54K TPS
Call Mix	4.5k nbsf Traffic and 50k Rx traffic
Traffic Ratio	Binding Create ratio -1 Binding Delete ratio - 1 Rx AAR-I ratio - 1 Rx RAR ratio - 1 Rx AAR-U ratio - 1 Rx STR ratio - 1
Active Binding Sessions	~50000000
Execution Time	~12 Hours

The following table describes the resource capacity allocated to the BSF microservices:

Table 3-110 BSF microservices Resource allocation

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod	Memory Limit Per Pod	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replicas
Appinfo	2	2	1	1	2	2	2	2	3
Audit Service	2	2	1	1	2	2	2	2	3

Table 3-110 (Cont.) BSF microservices Resource allocation

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod	Memory Limit Per Pod	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replicas
BSF Management Service	4	4	1	4	2	2	2	2	9
CM Service	4	4	1	2	2	2	2	2	3
Config Service	4	4	1	2	2	2	2	2	3
Diameter Gateway	4	4	2	2	2	2	2	2	8
Egress Gateway	4	4	4	6	2	2	2	2	3
Ingress Gateway	4	4	4	6	2	2	2	2	3
Nrf Client Management	1	1	1	1	2	2	2	2	2
Query Service	2	2	1	1	2	2	2	2	3
Performance	4	4	1	1	2	2	2	2	3

The following table describes the resource capacity allocated to the cnDBTier microservices:

Table 3-111 cnDBTier services resource allocation

Microservice Name	CPU Request per Pod	CPU Limit Per Pod	Memory Request per Pod (Gi)	Memory Limit Per Pod (Gi)	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replica Count
ndbmgmd	3	3	10	10	2	2	2	2	2
ndbmttd	12	12	100	100	5	5	2	2	8
mysqld	4	4	16	16	4	4	4	4	4
appmysqld	12	12	20	20	5	5	6	6	3

The following table describes the interfaces that were either enabled or disabled for this run:

Table 3-112 BSF Features

Features Name	Feature Status
Nbsf	Enabled
Rx	Enabled

The following cnDBTier and Policy helm parameters configured for this run:

Table 3-113 Configuring Helm Parameters

cnDBTier Parameter	Value	Description
MaxNoOfExecutionThreads	11	Specifies the number of execution threads used by ndbmttd.
MaxNoOfConcurrentScans	495	Specifies the maximum number of scans executing concurrently on ndbmttd.
datamemory	37 GB	Specifies the cnDBTier ndb data memory capacity configuration.
proxy.istio.io/config	{'concurrency: 8'}	Specifies the cnDBTier App node (ndbappmysqld) istio side car configuration.
proxy.istio.io/config	{'concurrency: 8'}	Specifies the cnDBTier Data node (ndbmttd) istio side car configuration.
BSF Parameter		
proxy.istio.io/config	{'concurrency: 4'}	Specifies the BSF management service istio side car configuration.

3.12.2 CPU and Memory Utilization

The following table describes the benchmarking number as per the system maximum capacity utilization for BSF Microservices.

BSF Microservices and their Resource Utilization

The following table describes the benchmarking number as per the system maximum capacity utilization for BSF Microservices.

Table 3-114 BSF Microservices and their Resource Utilization

Service	Site 1 CPU	Site 1 Memory	Site 1 Istio CPU	Site 1 Istio Memory	Site 2 CPU	Site 2 Memory	Site 2 Istio CPU	Site 2 Istio Memory	Site 3 CPU	Site 3 Memory	Site 3 Istio CPU	Site 3 Istio Memory	Site 4 CPU	Site 4 Memory	Site 4 Istio CPU	Site 4 Istio Memory
diagram-gateway	16.405 (51.27%)	9.913 (61.96%)	6.686 (41.79%)	2.468 (15.42%)	0.074 (0.46%)	3.385 (42.31%)	0.056 (0.70%)	1.168 (14.60%)	0.061 (0.38%)	2.771 (34.64%)	0.024 (0.30%)	1.157 (14.47%)	0.058 (0.36%)	2.665 (33.31%)	0.028 (0.35%)	1.227 (15.33%)
Perfinfo	0.113 (0.94%)	0.416 (13.87%)	0.013 (0.22%)	0.851 (14.18%)	0.086 (1.07%)	0.273 (13.67%)	0.009 (0.22%)	0.500 (12.50%)	0.106 (0.88%)	0.400 (13.35%)	0.012 (0.20%)	0.737 (12.29%)	0.071 (0.89%)	0.271 (13.57%)	0.010 (0.25%)	0.532 (13.31%)

Table 3-114 (Cont.) BSF Microservices and their Resource Utilization

Service	Site 1 CP U	Site 1 Me mor y	Site 1 Isti o CP U	Site 1 Isti o Me mor y	Site 2 CP U	Site 2 Me mor y	Site 2 Isti o CP U	Site 2 Isti o Me mor y	Site 3 CP U	Site 3 Me mor y	Site 3 Isti o CP U	Site 3 Isti o Me mor y	Site 4 CP U	Site 4 Me mor y	Site 4 Isti o CP U	Site 4 Isti o Me mor y
Appi nfo	0.05 2 (0.8 7%)	0.76 4 (25. 46%)	0.01 2 (0.2 0%)	0.81 8 (13. 64%)	0.03 0 (0.7 5%)	0.49 7 (24. 85%)	0.00 7 (0.1 8%)	0.50 3 (12. 57%)	0.03 2 (0.8 0%)	0.50 7 (25. 34%)	0.00 6 (0.1 5%)	0.49 9 (12. 48%)	0.03 1 (0.7 8%)	0.51 0 (25. 49%)	0.00 7 (0.1 8%)	0.50 5 (12. 62%)
cm- serv ice	0.01 8 (0.1 5%)	2.30 7 (38. 44%)	0.01 9 (0.3 2%)	0.89 3 (14. 88%)	0.01 1 (0.1 4%)	1.28 2 (32. 06%)	0.01 1 (0.2 7%)	0.55 1 (13. 77%)	0.01 3 (0.1 1%)	1.89 7 (31. 62%)	0.01 5 (0.2 5%)	0.80 9 (13. 48%)	0.01 7 (0.4 3%)	0.56 4 (14. 11%)	0.00 4 (0.1 0%)	0.72 1 (36. 04%)
Con fig- serv er	0.11 9 (0.9 9%)	2.44 8 (40. 80%)	0.08 7 (1.4 5%)	0.89 2 (14. 86%)	0.06 4 (0.8 0%)	1.51 4 (37. 84%)	0.05 0 (1.2 5%)	0.55 2 (13. 79%)	0.04 7 (0.5 9%)	1.80 1 (45. 02%)	0.03 8 (0.9 5%)	0.54 9 (13. 72%)	0.04 9 (0.6 1%)	1.82 7 (45. 68%)	0.04 5 (1.1 2%)	0.57 0 (14. 26%)
bsf- man age men t- serv ice	13.3 20 (37. 00%)	22.1 50 (61. 53%)	7.89 5 (43. 86%)	3.89 6 (21. 64%)	0.09 4 (0.5 9%)	4.04 5 (25. 28%)	0.06 3 (0.7 9%)	1.18 5 (14. 81%)	0.00 7 (0.0 4%)	7.71 7 (48. 23%)	0.01 8 (0.2 2%)	1.19 4 (14. 93%)	0.00 8 (0.0 5%)	7.71 7 (48. 23%)	0.02 2 (0.2 7%)	1.20 6 (15. 08%)
egre ss- gate way	0.09 2 (0.7 7%)	2.93 4 (16. 30%)	0.03 9 (0.6 5%)	0.96 3 (16. 05%)	0.08 4 (1.0 5%)	1.92 3 (16. 02%)	0.03 3 (0.8 3%)	0.59 0 (14. 75%)	0.00 6 (0.1 5%)	0.58 3 (14. 58%)	0.04 7 (0.5 9%)	1.80 1 (45. 02%)	0.01 2 (0.3 0%)	0.58 3 (14. 58%)	0.04 9 (0.6 1%)	1.82 7 (45. 68%)
ingr ess- gate way	3.28 1 (27. 34%)	9.87 0 (54. 83%)	2.02 2 (33. 70%)	1.44 7 (24. 12%)	0.02 7 (0.3 4%)	1.93 2 (16. 10%)	0.01 5 (0.3 8%)	0.57 7 (14. 43%)	0.02 2 (0.2 7%)	1.88 8 (15. 73%)	0.01 0 (0.2 5%)	0.57 3 (14. 33%)	0.01 2 (0.3 0%)	0.58 4 (14. 60%)	0.00 6 (0.0 7%)	1.87 2 (15. 60%)
nrf- clien t- nfm ana gem ent	0.00 7 (0.3 5%)	1.01 3 (50. 63%)	0.00 6 (0.1 5%)	0.68 6 (17. 14%)	0.00 6 (0.3 0%)	0.99 8 (49. 90%)	0.00 7 (0.1 8%)	0.53 0 (13. 26%)	0.00 6 (0.1 5%)	0.53 5 (13. 38%)	0.02 2 (0.2 7%)	1.88 8 (15. 73%)	0.02 2 (0.2 7%)	1.92 3 (16. 02%)	0.01 2 (0.3 0%)	0.58 4 (14. 60%)
audi t- serv ice	0.02 3 (0.3 8%)	1.25 4 (41. 80%)	0.02 3 (0.3 8%)	0.85 1 (14. 18%)	0.01 9 (0.4 7%)	0.87 2 (43. 60%)	0.02 2 (0.5 5%)	0.51 3 (12. 82%)	0.00 4 (0.1 0%)	0.73 5 (36. 77%)	0.00 7 (0.1 8%)	0.50 6 (12. 65%)	0.00 4 (0.1 0%)	0.72 1 (36. 04%)	0.00 6 (0.1 5%)	0.50 5 (12. 62%)

Table 3-114 (Cont.) BSF Microservices and their Resource Utilization

Ser vice	Site 1 CP U	Site 1 Me mor y	Site 1 Isti o CP U	Site 1 Isti o Me mor y	Site 2 CP U	Site 2 Me mor y	Site 2 Isti o CP U	Site 2 Isti o Me mor y	Site 3 CP U	Site 3 Me mor y	Site 3 Isti o CP U	Site 3 Isti o Me mor y	Site 4 CP U	Site 4 Me mor y	Site 4 Isti o CP U	Site 4 Isti o Me mor y
quer yser vice	0.00 3 (0.0 5%)	0.93 1 (31. 02%)	0.00 8 (0.1 3%)	0.80 9 (13. 48%)	0.00 2 (0.0 5%)	0.62 3 (31. 15%)	0.00 4 (0.1 0%)	0.50 2 (12. 55%)	0.00 2 (0.0 5%)	0.61 5 (30. 76%)	0.00 5 (0.1 2%)	0.49 0 (12. 26%)	0.00 5 (0.1 2%)	0.49 9 (12. 48%)	0.01 1 (0.1 4%)	1.46 2 (36. 55%)

Observed Values of cnDBTier Services

The following table provides information about observed values of cnDBTier services.

Table 3-115 Observed Values of cnDBTier Services

Ser vice	Site 1 CP U	Site 1 Me mor y	Site 1 Isti o CP U	Site 1 Isti o Me mor y	Site 2 CP U	Site 2 Me mor y	Site 2 Isti o CP U	Site 2 Isti o Me mor y	Site 3 CP U	Site 3 Me mor y	Site 3 Isti o CP U	Site 3 Isti o Me mor y	Site 4 CP U	Site 4 Me mor y	Site 4 Isti o CP U	Site 4 Isti o Me mor y
ndb app mys qld	18.2 92 (76. 22%))	14.1 70 (31. 49%))	6.90 9 (76. 77%))	1.31 6 (21. 94%))	0.16 2 (0.6 7%))	12.3 79 (27. 51%))	0.11 7 (1.3 0%))	1.25 5 (20. 91%))	0.09 8 (0.4 1%))	12.2 81 (27. 29%))	0.09 0 (1.0 0%))	1.24 6 (20. 77%))	0.09 3 (0.3 9%))	11.7 50 (26. 11%))	0.10 2 (1.1 3%))	1.25 2 (20. 87%))
ndb mtd	19.2 68 (20. 07%))	324. 049 (63. 29%))	16.1 36 (40. 34%))	3.08 1 (19. 26%))	6.30 4 (6.5 7%))	324. 378 (63. 36%))	1.62 2 (4.0 6%))	3.13 9 (19. 62%))	7.21 6 (7.5 2%))	324. 667 (63. 41%))	1.68 4 (4.2 1%))	3.12 4 (19. 53%))	6.93 1 (7.2 2%))	321. 891 (62. 87%))	1.62 7 (4.0 7%))	3.17 5 (19. 84%))
ndb mys qld	0.81 5 (3.4 0%))	24.7 30 (25. 76%))	0.51 2 (4.2 7%))	1.94 4 (16. 20%))	0.48 6 (2.0 2%))	22.5 72 (23. 51%))	0.38 1 (3.1 8%))	1.97 8 (16. 48%))	0.46 5 (1.9 4%))	22.4 42 (23. 38%))	0.40 8 (3.4 0%))	1.91 2 (15. 93%))	0.45 6 (1.9 0%))	22.4 81 (23. 42%))	0.40 3 (3.3 6%))	1.92 8 (16. 06%))

3.12.3 TPS and DB Statistics

Table 3-116 Overall TPS Ingress & Egress TPS to/from NF

Site	Total TPS	Rx	Nbsf
Site1	54K	50K	4.5K
Site 2	-	-	-
Site 3	-	-	-
Site 4	-	-	-

Observed values of cnDBTier Record counts:

Table 3-117 Database Records

DB Statistics	Read	Write	Commit
Site1	8.63K	6.212K	2.3K
Site2	-	-	-
Site3	-	-	-
Site4	-	-	-

Replication Delay

Observed values of latency on replication channels:

DB Statistics	Latency Min (Seconds)	Latency Max (Seconds)
Site1	0	0
Site2	0	1
Site3	0	0
Site4	0	1

3.12.4 Results

Table 3-118 Results

Attributes	Average Latency (ms)
Binding Create	8.2
Binding Delete	8.0
AAR-RX-INIT	10.8
RX-RAR	0.9
AAR-RX-UPDATE	0.5
RX-STR	0.5

3.13 BSF Call Model Deployed on a Three-site Setup with 63K TPS Traffic on One Site and ASM Enabled

This test run benchmarks the performance and capacity of BSF call model that is deployed on a three-site setup with 63K TPS traffic on one site and Aspen Service Mesh (ASM) enabled.

3.13.1 Test Case and Setup Details

The following table describes the test case parameters and their values:

Table 3-119 Test Case Parameters

Parameters	Values
Call Rate	63K TPS
Call Mix	8.43K nbsf traffic and 54.7K Rx traffic

Table 3-119 (Cont.) Test Case Parameters

Parameters	Values
Traffic Ratio	Binding Create ratio - 1 Binding Delete ratio - 1 Binding Get ratio (Discovery) - 0.15 Rx AAR-I ratio - 1 Rx RAR ratio - 1 Rx AAR-U ratio - 1 Rx STR ratio - 1
Active Subscribers	32M subscribers and 64M sessions
Execution Time	~60 hours

The following table describes the resource capacity allocated to the BSF microservices:

Table 3-120 BSF microservices Resource allocation

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod (Gi)	Memory Limit Per Pod (Gi)	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replicas
Appinfo	2	2	1	1	2	2	2	2	3
Audit Service	2	2	1	1	2	2	2	2	3
BSF Management Service	4	4	1	4	2	2	2	2	14
Alternate Route Service	2	2	2	4	2	2	2	2	3
CM Service	4	4	1	2	2	2	2	2	3
Config Service	4	4	1	2	2	2	2	2	3
Diameter Gateway	4	4	2	2	2	2	2	2	15
Egress Gateway	4	4	4	6	2	2	2	2	3
Ingress Gateway	4	4	4	6	2	2	2	2	7
Nrf Client Management	1	1	1	1	2	2	2	2	3
Query Service	2	2	1	1	2	2	2	2	3
Perf-info	4	4	1	1	2	2	2	2	3

The following table describes the resource capacity allocated to the cnDBTier microservices:

Table 3-121 cnDBTier services resource allocation

Microservice Name	CPU Request per Pod	CPU Limit Per Pod	Memory Request per Pod (Gi)	Memory Limit Per Pod (Gi)	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replicas
ndbmgmd	3	3	10	10	2	2	2	2	2
ndbmttd	12	12	100	100	5	5	2	2	12
mysqld	4	4	16	16	4	4	4	4	6
appmysqld	12	12	20	20	5	5	6	6	9
db-monitor-service	0.2	0.2	0.5	0.5	2	2	2	2	1
db-replication-service	0.2	0.2	12	12	2	2	2	2	3
db-backup-service	0.1	0.1	0.128	0.128	0	0	0	0	1

The following table describes the interfaces that were either enabled or disabled for this run:

Table 3-122 BSF Features

Features Name	Feature Status
Audit	Enabled
Overload	Enabled
dnssrv	Enabled
Controlled Shutdown	Enabled
NF Scoring	Enabled

The following cnDBTier and Policy helm parameters configured for this run:

Table 3-123 Configuring Helm Parameters

cnDBTier Parameter	Value	Description
MaxNoOfExecutionThreads	13	Specifies the number of execution threads used by ndbmttd.
MaxNoOfConcurrentScans	495	Specifies the maximum number of scans executing concurrently on ndbmttd.
datamemory	51 GB	Specifies the cnDBTier ndb data memory capacity configuration.
proxy.istio.io/config	'{concurrency: 8}'	Specifies the cnDBTier App node (ndbappmysqld) istio sidecar configuration.

Table 3-123 (Cont.) Configuring Helm Parameters

cnDBTier Parameter	Value	Description
proxy.istio.io/config	'{concurrency: 4}'	Specifies the cnDBTier Data node (ndbmt) istio side car configuration.
BSF Parameter		
proxy.istio.io/config	'{concurrency: 4}'	Specifies the BSF management service istio side car configuration.

3.13.2 CPU and Memory Utilization

The following table describes the benchmarking number as per the system maximum capacity utilization for BSF microservices.

BSF Microservices and their Resource Utilization

The following table describes the benchmarking number as per the system maximum capacity utilization for BSF microservices.

Table 3-124 BSF Microservices and their Resource Utilization

Service	Site 1 CPU	Site 1 Memory	Site 1 Istio CPU	Site 1 Istio Memory	Site 2 CPU	Site 2 Memory	Site 2 Istio CPU	Site 2 Istio Memory	Site 3 CPU	Site 3 Memory	Site 3 Istio CPU	Site 3 Istio Memory
diagram-gateway	21.271 (35.45%)	15.829 (52.76%)	3.875 (12.92%)	3.907 (13.02%)	-	-	-	-	-	-	-	-
Perfinfo	0.122 (1.02%)	0.431 (14.36%)	0.016 (0.27%)	0.755 (12.58%)	-	-	-	-	-	-	-	-
Appinfo	0.070 (1.17%)	0.814 (27.15%)	0.012 (0.20%)	0.753 (12.55%)	-	-	-	-	-	-	-	-
cm-service	0.027 (0.23%)	2.254 (37.57%)	0.027 (0.45%)	0.780 (13.00%)	-	-	-	-	-	-	-	-
Config-server	0.198 (1.65%)	1.298 (21.63%)	0.189 (3.15%)	0.691 (11.52%)	-	-	-	-	-	-	-	-

Table 3-124 (Cont.) BSF Microservices and their Resource Utilization

Ser vice	Site 1 CP U	Site 1 Me mor y	Site 1 Isti o CP U	Site 1 Isti o Me mor y	Site 2 CP U	Site 2 Me mor y	Site 2 Isti o CP U	Site 2 Isti o Me mor y	Site 3 CP U	Site 3 Me mor y	Site 3 Isti o CP U	Site 3 Isti o Me mor y
bsf-manage-ment-service	19.866 (35.48%)	22.906 (40.90%)	12.000 (42.86%)	4.305 (15.37%)	-	-	-	-	-	-	-	-
egress-gateway	0.013 (0.11%)	2.316 (12.87%)	0.012 (0.20%)	0.813 (13.56%)	-	-	-	-	-	-	-	-
ingress-gateway	7.079 (25.28%)	11.938 (28.42%)	4.674 (33.39%)	2.415 (17.25%)	-	-	-	-	-	-	-	-
nrf-client-nfm-management	0.014 (0.47%)	1.431 (47.69%)	0.010 (0.17%)	0.763 (12.71%)	-	-	-	-	-	-	-	-
audit-service	0.016 (0.27%)	1.121 (37.37%)	0.038 (0.63%)	0.729 (12.16%)	-	-	-	-	-	-	-	-
quer-yer-vice	0.003 (0.05%)	0.933 (31.09%)	0.006 (0.10%)	0.736 (12.27%)	-	-	-	-	-	-	-	-

Observed Values of cnDBTier Services

The following table provides information about observed values of cnDBTier services.

Table 3-125 cnDBTier Services and their Resource Utilization

Services	Site1 CPU	Site1 Memory	Site2 CPU	Site2 Memory	Site3 CPU	Site3 Memory
mysql-cluster-db- db-backup- manager-svc/db- backup-manager- svc	[0.002 (2.00%)]	[0.086 (68.75%)]	[0.007 (7.00%)]	[0.087 (69.53%)]	[0.001 (1.00%)]	[0.091 (72.66%)]
mysql-cluster-db- db-monitor-svc/ istio-proxy	[0.005 (0.10%)]	[0.259 (5.18%)]	[0.004 (0.08%)]	[0.254 (5.08%)]	[0.004 (0.08%)]	[0.259 (5.18%)]
mysql-cluster-db- db-monitor-svc/db- monitor-svc	[0.004 (2.00%)]	[0.346 (70.80%)]	[0.015 (7.50%)]	[0.334 (68.40%)]	[0.028 (14.00%)]	[0.329 (67.40%)]
mysql-cluster-db- two-four- replication-svc/ istio-proxy	None	None	[0.003 (0.06%)]	[0.250 (5.00%)]	None	None
mysql-cluster-db- two-four- replication-svc/two- four-replication-svc	None	None	[0.006 (0.30%)]	[0.278 (2.32%)]	None	None
mysql-cluster-db- two-one- replication-svc/ istio-proxy	None	None	[0.003 (0.15%)]	[0.248 (12.40%)]	None	None
mysql-cluster-db- two-one- replication-svc/two- one-replication-svc	None	None	[0.005 (0.25%)]	[0.295 (2.46%)]	None	None
mysql-cluster-db- two-one- replication-svc/db- infra-monitor-svc	None	None	[0.001 (1.00%)]	[0.052 (20.70%)]	None	None
mysql-cluster-db- two-three- replication-svc/ istio-proxy	None	None	[0.004 (0.08%)]	[0.249 (4.98%)]	None	None
mysql-cluster-db- two-three- replication-svc/two- three-replication- svc	None	None	[0.006 (0.30%)]	[0.292 (2.43%)]	None	None
ndbappmysqld/ istio-proxy	[11.494 (25.54%)]	[2.851 (6.33%)]	[0.119 (0.26%)]	[2.694 (5.99%)]	[0.112 (0.25%)]	[2.681 (5.96%)]
ndbappmysqld/ mysqlndbcluster	[22.608 (31.40%)]	[36.985 (27.40%)]	[0.110 (0.15%)]	[32.576 (24.13%)]	[0.110 (0.15%)]	[32.562 (24.12%)]
ndbappmysqld/db- infra-monitor-svc	[0.011 (1.22%)]	[0.487 (21.66%)]	[0.011 (1.22%)]	[0.488 (21.70%)]	[0.014 (1.56%)]	[0.493 (21.92%)]
ndbappmysqld/init- sidecar	[0.018 (2.00%)]	[0.009 (0.39%)]	[0.018 (2.00%)]	[0.009 (0.39%)]	[0.018 (2.00%)]	[0.009 (0.39%)]

Table 3-125 (Cont.) cnDBTier Services and their Resource Utilization

Services	Site1 CPU	Site1 Memory	Site2 CPU	Site2 Memory	Site3 CPU	Site3 Memory
ndbmgmd/istio-proxy	[0.014 (0.70%)]	[0.503 (12.57%)]	[0.014 (0.70%)]	[0.504 (12.60%)]	[0.014 (0.70%)]	[0.507 (12.67%)]
ndbmgmd/ mysqlndbcluster	[0.011 (0.18%)]	[0.095 (0.47%)]	[0.010 (0.17%)]	[0.093 (0.46%)]	[0.011 (0.18%)]	[0.095 (0.47%)]
ndbmgmd/db-infra- monitor-svc	[0.002 (1.00%)]	[0.099 (19.73%)]	[0.002 (1.00%)]	[0.100 (19.92%)]	[0.002 (1.00%)]	[0.101 (20.12%)]
ndbmt/istio-proxy	[25.237 (42.06%)]	[3.642 (6.07%)]	[1.611 (2.69%)]	[3.644 (6.07%)]	[4.060 (6.77%)]	[3.672 (6.12%)]
ndbmt/ mysqlndbcluster	[42.015 (29.18%)]	[677.22 6 (88.18%)]	[9.079 (6.30%)]	[677.26 0 (88.18%)]	[11.299 (7.85%)]	[677.25 8 (88.18%)]
ndbmt/db-backup- executor-svc	[0.012 (1.00%)]	[0.656 (43.75%)]	[0.012 (1.00%)]	[0.658 (43.88%)]	[0.012 (1.00%)]	[0.659 (43.95%)]
ndbmt/db-infra- monitor-svc	[0.087 (7.25%)]	[0.628 (20.93%)]	[0.066 (5.50%)]	[0.627 (20.90%)]	[0.045 (3.75%)]	[0.632 (21.06%)]
ndbmysqld/istio- proxy	[0.676 (2.25%)]	[1.791 (5.97%)]	[0.473 (1.58%)]	[1.795 (5.98%)]	[0.478 (1.59%)]	[1.820 (6.07%)]
ndbmysqld/ mysqlndbcluster	[0.977 (4.07%)]	[25.205 (26.26%)]	[0.582 (2.42%)]	[22.083 (23.00%)]	[0.599 (2.50%)]	[22.086 (23.01%)]
ndbmysqld/init- sidecar	[0.012 (2.00%)]	[0.009 (0.59%)]	[0.012 (2.00%)]	[0.007 (0.46%)]	[0.013 (2.17%)]	[0.007 (0.46%)]
ndbmysqld/db- infra-monitor-svc	[0.010 (1.67%)]	[0.371 (24.74%)]	[0.013 (2.17%)]	[0.385 (25.65%)]	[0.013 (2.17%)]	[0.365 (24.35%)]
mysql-cluster-db- three-four- replication-svc/ istio-proxy	None	None	None	None	[0.003 (0.06%)]	[0.256 (5.12%)]
mysql-cluster-db- three-four- replication-svc/ three-four- replication-svc	None	None	None	None	[0.007 (0.35%)]	[0.284 (2.37%)]
mysql-cluster-db- three-one- replication-svc/ istio-proxy	None	None	None	None	[0.003 (0.15%)]	[0.250 (12.50%)]
mysql-cluster-db- three-one- replication-svc/ three-one- replication-svc	None	None	None	None	[0.007 (0.35%)]	[0.274 (2.29%)]

Table 3-125 (Cont.) cnDBTier Services and their Resource Utilization

Services	Site1 CPU	Site1 Memory	Site2 CPU	Site2 Memory	Site3 CPU	Site3 Memory
mysql-cluster-db-three-one-replication-svc/db-infra-monitor-svc	None	None	None	None	[0.001 (1.00%)]	[0.051 (20.31%)]
mysql-cluster-db-three-two-replication-svc/istio-proxy	None	None	None	None	[0.003 (0.06%)]	[0.248 (4.96%)]
mysql-cluster-db-three-two-replication-svc/three-two-replication-svc	None	None	None	None	[0.005 (0.25%)]	[0.284 (2.37%)]
mysql-cluster-db-one-four-replication-svc/istio-proxy	[0.004 (0.08%)]	[0.252 (5.04%)]	None	None	None	None
mysql-cluster-db-one-four-replication-svc/one-four-replication-svc	[0.005 (0.25%)]	[0.271 (2.26%)]	None	None	None	None
mysql-cluster-db-one-three-replication-svc/istio-proxy	[0.003 (0.06%)]	[0.264 (5.27%)]	None	None	None	None
mysql-cluster-db-one-three-replication-svc/one-three-replication-svc	[0.006 (0.30%)]	[0.293 (2.44%)]	None	None	None	None
mysql-cluster-db-one-two-replication-svc/istio-proxy	[0.003 (0.15%)]	[0.262 (13.09%)]	None	None	None	None
mysql-cluster-db-one-two-replication-svc/one-two-replication-svc	[0.012 (0.60%)]	[0.280 (2.34%)]	None	None	None	None
mysql-cluster-db-one-two-replication-svc/db-infra-monitor-svc	[0.001 (1.00%)]	[0.052 (20.70%)]	None	None	None	None

3.13.3 TPS and DB Statistics

Table 3-126 Overall TPS Ingress & Egress TPS to/from NF

Site	Total TPS	Rx	Nbsf
Site1	63.1K	54.7K	8.43K

Table 3-126 (Cont.) Overall TPS Ingress & Egress TPS to/from NF

Site	Total TPS	Rx	Nbsf
Site 2	-	-	-
Site 3	-	-	-

Observed values of cnDBTier Record counts:

Table 3-127 Database Records

DB Statistics	Read	Write	Commit
Site1	7.298K	5.254K	1.934K
Site2	2.387K	7.244K	0.037K
Site3	1.834K	5.569K	0.059K

3.13.4 Results

Table 3-128 Average Latency Observations (in milliseconds)

NF service	Average Latency (ms) Site1
Ingress	7.420
Egress	0.881
Diameter Gateway	0.355
BSF Management	6.070


Table 3-129 Average Current Percentile Latency Observations (in milliseconds)

NF	50th Percentile (Site 1)	99th Percentile (Site 1)
Ingress Gateway	7.15	29.2
Diameter Gateway	-	5.650

3.14 BSF Call Model Deployed on a Four-site Setup with 22K TPS Traffic on One Site and ASM Enabled

This test run benchmarks the performance and capacity of BSF call model that is deployed on a four-site setup with 22K TPS traffic on one site and Aspen Service Mesh (ASM) enabled.

The following image represents the BSF deployment on an ASM enabled four-site georedundant setup:

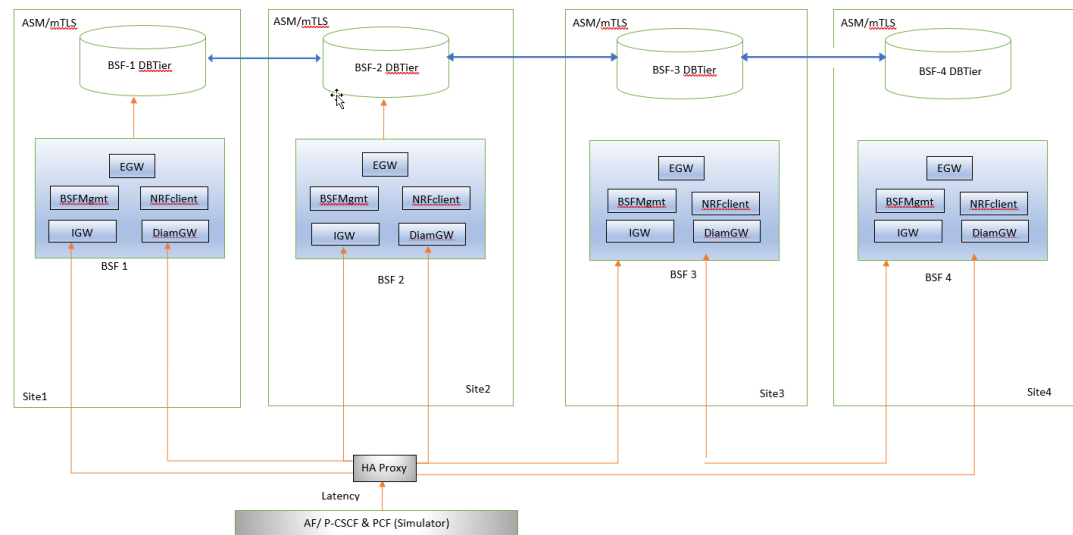Figure 3-8 ASM Enabled Four-site Georedundant Setup

3.14.1 Test Case and Setup Details

The following table describes the test case parameters and their values:

Table 3-130 Test Case Parameters

Parameters	Values
Call Rate	22K TPS
Call Mix	14k nbsf traffic and 8k Rx traffic
Traffic Ratio	Binding Create ratio -1 Binding Delete ratio - 1 Rx AAR-I ratio - 1 Rx RAR ratio - 1 Rx AAR-U ratio - 1 Rx STR ratio - 1
Active Subscribers	7M subscribers and 14M sessions
Execution Time	~10 hours

The following table describes the resource capacity allocated to the BSF microservices:

Table 3-131 BSF microservices Resource allocation

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod (Gi)	Memory Limit Per Pod (Gi)	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replicas
Alternate Route Service	2	2	2	4	2	2	2	2	2
Appinfo	2	2	1	1	2	2	2	2	3

Table 3-131 (Cont.) BSF microservices Resource allocation

Service Name	CPU Request Per Pod	CPU Limit Per Pod	Memory Request Per Pod (Gi)	Memory Limit Per Pod (Gi)	Isito CPU Request	Isito CPU Limit	Isito Memory Request (Gi)	Isito Memory Limit (Gi)	Replicas
Audit Service	2	2	1	1	2	2	2	2	2
BSF Management Service	4	4	1	4	2	2	2	2	11
CM Service	4	4	1	2	2	2	2	2	3
Config Service	4	4	1	2	2	2	2	2	2
Diameter Gateway	4	4	1	2	2	2	2	2	2
Egress Gateway	4	4	4	6	2	2	2	2	2
Ingress Gateway	4	4	4	6	2	2	2	2	9
Nrf Client Management	1	1	1	1	2	2	2	2	2
Query Service	2	2	1	1	2	2	2	2	3
Perf-info	4	4	1	1	2	2	2	2	3

The following table describes the resource capacity allocated to the cnDBTier microservices:

Table 3-132 cnDBTier microservices Resource Allocation - Site 1

Microservices	Replicas	CPU Limit Per Container	CPU Request Per Container	Memory Limit Per Container	Memory Request Per Container
mysql-cluster-db-db-backup-manager-svc/db-backup-manager-svc	1	100m	100m	128Mi	128Mi
mysql-cluster-db-db-monitor-svc/db-monitor-svc	1	200m	200m	500Mi	500Mi
mysql-cluster-db-db-monitor-svc/istio-proxy	1	5	5	5Gi	5Gi
mysql-cluster-db-one-four-replication-svc/istio-proxy	1	5	5	5Gi	5Gi

Table 3-132 (Cont.) cnDBTier microservices Resource Allocation - Site 1

Microservices	Replicas	CPU Limit Per Container	CPU Request Per Container	Memory Limit Per Container	Memory Request Per Container
mysql-cluster-db-one-four-replication-svc/one-four-replication-svc	1	2	2	12Gi	12Gi
mysql-cluster-db-one-three-replication-svc/istio-proxy	1	5	5	5Gi	5Gi
mysql-cluster-db-one-three-replication-svc/one-three-replication-svc	1	2	2	12Gi	12Gi
mysql-cluster-db-one-two-replication-svc/db-infra-monitor-svc	1	100m	100m	256Mi	256Mi
mysql-cluster-db-one-two-replication-svc/istio-proxy	1	2	2	2Gi	2Gi
mysql-cluster-db-one-two-replication-svc/one-two-replication-svc	1	2	2	12Gi	12Gi
ndbappmysqld/db-infra-monitor-svc	9	100m	100m	256Mi	256Mi
ndbappmysqld/init-sidecar	9	100m	100m	256Mi	256Mi
ndbappmysqld/istio-proxy	9	5	5	5Gi	5Gi
ndbappmysqld/mysqlndbcluster	9	8	8	15Gi	15Gi
ndbmgmd/db-infra-monitor-svc	2	100m	100m	256Mi	256Mi
ndbmgmd/istio-proxy	2	1	1	2Gi	2Gi
ndbmgmd/mysqlndbcluster	2	3	3	10Gi	10Gi
ndbmtl/db-backup-executor-svc	12	100m	100m	128Mi	128Mi

Table 3-132 (Cont.) cnDBTier microservices Resource Allocation - Site 1

Microservices	Replicas	CPU Limit Per Container	CPU Request Per Container	Memory Limit Per Container	Memory Request Per Container
ndbmtl/db-infra-monitor-svc	12	100m	100m	256Mi	256Mi
ndbmtl/istio-proxy	12	5	5	5Gi	5Gi
ndbmtl/mysqlndbcluster	12	12	12	64Gi	64Gi
ndbmysqld/db-infra-monitor-svc	6	100m	100m	256Mi	256Mi
ndbmysqld/init-sidecar	6	100m	100m	256Mi	256Mi
ndbmysqld/istio-proxy	6	5	5	5Gi	5Gi
ndbmysqld/mysqlndbcluster	6	4	4	16Gi	16Gi

Table 3-133 cnDBTier microservices Resource Allocation - Site 2

Microservices	Replicas	CPU Limit Per Container	CPU Request Per Container	Memory Limit Per Container	Memory Request Per Container
ndbmtl/istio-proxy	12	5	5	5Gi	5Gi
ndbmtl/mysqlndbcluster	12	12	12	64Gi	64Gi
ndbmtl/db-backup-executor-svc	12	100m	100m	128Mi	128Mi
ndbmtl/db-infra-monitor-svc	12	100m	100m	256Mi	256Mi
ndbmysqld/istio-proxy	6	5	5	5Gi	5Gi
ndbmysqld/mysqlndbcluster	6	4	4	16Gi	16Gi
ndbmysqld/init-sidecar	6	100m	100m	256Mi	256Mi
ndbmysqld/db-infra-monitor-svc	6	100m	100m	256Mi	256Mi

Table 3-133 (Cont.) cnDBTier microservices Resource Allocation - Site 2

Microservices	Replicas	CPU Limit Per Container	CPU Request Per Container	Memory Limit Per Container	Memory Request Per Container
mysql-cluster-db-db-backup-manager-svc/db-backup-manager-svc	1	100m	100m	128Mi	128Mi
mysql-cluster-db-db-monitor-svc/istio-proxy	1	5	5	5Gi	5Gi
mysql-cluster-db-db-monitor-svc/db-monitor-svc	1	200m	200m	500Mi	500Mi
mysql-cluster-db-two-four-replication-svc/istio-proxy	1	5	5	5Gi	5Gi
mysql-cluster-db-two-four-replication-svc/two-four-replication-svc	1	2	2	12Gi	12Gi
mysql-cluster-db-two-one-replication-svc/istio-proxy	1	2	2	2Gi	2Gi
mysql-cluster-db-two-one-replication-svc/two-one-replication-svc	1	2	2	12Gi	12Gi
mysql-cluster-db-two-one-replication-svc/db-infra-monitor-svc	1	100m	100m	256Mi	256Mi
mysql-cluster-db-two-three-replication-svc/istio-proxy	1	5	5	5Gi	5Gi
mysql-cluster-db-two-three-replication-svc/two-three-replication-svc	1	2	2	12Gi	12Gi
ndbappmysqld/istio-proxy	9	5	5	5Gi	5Gi
ndbappmysqld/mysqlndbcluster	9	8	8	15Gi	15Gi

Table 3-133 (Cont.) cnDBTier microservices Resource Allocation - Site 2

Microservices	Replicas	CPU Limit Per Container	CPU Request Per Container	Memory Limit Per Container	Memory Request Per Container
ndbappmysqld/db-infra-monitor-svc	9	100m	100m	256Mi	256Mi
ndbappmysqld/init-sidecar	9	100m	100m	256Mi	256Mi
ndbmgmd/istio-proxy	2	1	1	2Gi	2Gi
ndbmgmd/mysqlndbcluster	2	3	3	10Gi	10Gi
ndbmgmd/db-infra-monitor-svc	2	100m	100m	256Mi	256Mi

Table 3-134 cnDBTier microservices Resource Allocation - Site 3

Microservices	Replicas	CPU Limit Per Container	CPU Request Per Container	Memory Limit Per Container	Memory Request Per Container
ndbappmysqld/istio-proxy	9	5	5	5Gi	5Gi
ndbappmysqld/mysqlndbcluster	9	8	8	15Gi	15Gi
ndbappmysqld/db-infra-monitor-svc	9	100m	100m	256Mi	256Mi
ndbappmysqld/init-sidecar	9	100m	100m	256Mi	256Mi
ndbmgmd/istio-proxy	2	1	1	2Gi	2Gi
ndbmgmd/mysqlndbcluster	2	3	3	10Gi	10Gi
ndbmgmd/db-infra-monitor-svc	2	100m	100m	256Mi	256Mi
ndbmttd/istio-proxy	12	5	5	5Gi	5Gi
ndbmttd/mysqlndbcluster	12	12	12	64Gi	64Gi
ndbmttd/db-backup-executor-svc	12	100m	100m	128Mi	128Mi
ndbmttd/db-infra-monitor-svc	12	100m	100m	256Mi	256Mi

Table 3-134 (Cont.) cnDBTier microservices Resource Allocation - Site 3

Microservices	Replicas	CPU Limit Per Container	CPU Request Per Container	Memory Limit Per Container	Memory Request Per Container
ndbmysqld/istio-proxy	6	5	5	5Gi	5Gi
ndbmysqld/mysqlndbcluster	6	4	4	16Gi	16Gi
ndbmysqld/init-sidecar	6	100m	100m	256Mi	256Mi
ndbmysqld/db-infra-monitor-svc	6	100m	100m	256Mi	256Mi
mysql-cluster-db-db-backup-manager-svc/db-backup-manager-svc	1	100m	100m	128Mi	128Mi
mysql-cluster-db-db-monitor-svc/istio-proxy	1	5	5	5Gi	5Gi
mysql-cluster-db-db-monitor-svc/db-monitor-svc	1	200m	200m	500Mi	500Mi
mysql-cluster-db-three-four-replication-svc/istio-proxy	1	5	5	5Gi	5Gi
mysql-cluster-db-three-four-replication-svc/three-four-replication-svc	1	2	2	12Gi	12Gi
mysql-cluster-db-three-one-replication-svc/istio-proxy	1	2	2	2Gi	2Gi
mysql-cluster-db-three-one-replication-svc/three-one-replication-svc	1	2	2	12Gi	12Gi
mysql-cluster-db-three-one-replication-svc/db-infra-monitor-svc	1	100m	100m	256Mi	256Mi
mysql-cluster-db-three-two-replication-svc/istio-proxy	1	5	5	5Gi	5Gi

Table 3-134 (Cont.) cnDBTier microservices Resource Allocation - Site 3

Microservices	Replicas	CPU Limit Per Container	CPU Request Per Container	Memory Limit Per Container	Memory Request Per Container
mysql-cluster-db-three-two-replication-svc/ three-two-replication-svc	1	2	2	12Gi	12Gi

The following table describes the interfaces that were either enabled or disabled for this run:

Table 3-135 BSF Features

Features Name	Feature Status
Audit	Enabled
Overload	Enabled
dnssrv	Enabled
Controlled Shutdown	Enabled
NF Scoring	Enabled

The following cnDBTier and Policy helm parameters configured for this run:

Table 3-136 Configuring Helm Parameters

cnDBTier Parameter	Value	Description
MaxNoOfExecutionThreads	11	Specifies the number of execution threads used by ndbmttd.
MaxNoOfConcurrentScans	495	Specifies the maximum number of scans executing concurrently on ndbmttd.
datamemory	51 GB	Specifies the cnDBTier ndb data memory capacity configuration.
proxy.istio.io/config	'{concurrency: 2}'	Specifies the cnDBTier App node (ndbappmysqld) istio side car configuration.
proxy.istio.io/config	'{concurrency: 8}'	Specifies the cnDBTier Data node (ndbmttd) istio side car configuration.
BSF Parameter		
proxy.istio.io/config	'{concurrency: 4}'	Specifies the BSF management service istio side car configuration.

3.14.2 CPU and Memory Utilization

The following table describes the benchmarking number as per the system maximum capacity utilization for BSF microservices.

BSF Microservices and their Resource Utilization

The following table describes the benchmarking number as per the system maximum capacity utilization for BSF microservices.

Table 3-137 BSF Microservices and their Resource Utilization

Microservices	Site1 CPU	Site1 Memory	Site2 CPU	Site2 Memory	Site3 CPU	Site3 Memory	Site4 CPU	Site4 Memory
Appinfo Istio	0.20%	14.31%	-	-	-	-	-	-
Appinfo	0.95%	27.93%	-	-	-	-	-	-
BSF Management Service Istio	37.30%	18.54%	-	-	-	-	-	-
BSF Management Service	29.81%	58.44%	-	-	-	-	-	-
Alternate Route Service Istio	0.18%	14.87%	-	-	-	-	-	-
Alternate Route Service	0.12%	13.39%	-	-	-	-	-	-
Configuration Service Istio	1.20%	15.92%	-	-	-	-	-	-
Configuration Service	0.55%	44.78%	-	-	-	-	-	-
Egress Service Istio	0.75%	16.75%	-	-	-	-	-	-
Egress Gateway	0.09%	22.62%	-	-	-	-	-	-
Ingress Gateway Istio	41.70%	21.38%	-	-	-	-	-	-
Ingress Gateway	31.32%	44.15%	-	-	-	-	-	-
NRF Client NF Management Istio	0.22%	15.23%	-	-	-	-	-	-
NRF Client NF Management	0.40%	50.54%	-	-	-	-	-	-
Audit Service Istio	0.20%	14.33%	-	-	-	-	-	-

Table 3-137 (Cont.) BSF Microservices and their Resource Utilization

Microservices	Site1 CPU	Site1 Memory	Site2 CPU	Site2 Memory	Site3 CPU	Site3 Memory	Site4 CPU	Site4 Memory
Audit Service	0.10%	47.36%	-	-	-	-	-	-
CM Service Istio	0.43%	15.80%	-	-	-	-	-	-
CM Service	0.15%	36.65%	-	-	-	-	-	-
Query Service Istio	0.12%	14.01%	-	-	-	-	-	-
Query Service	0.05%	30.91%	-	-	-	-	-	-
Perfinfo Istio	0.25%	14.39%	-	-	-	-	-	-
Perfinfo	0.93%	14.16%	-	-	-	-	-	-
Diameter Gateway Istio	14.57%	16.75%	-	-	-	-	-	-
Diameter Gateway	31.72%	50.90%	-	-	-	-	-	-

Observed Values of cnDBTier Services

The following table provides information about observed values of cnDBTier services.

Table 3-138 Observed Values of cnDBTier Services

Microservices	Site1 CPU	Site1 Memory	Site2 CPU	Site2 Memory	Site3 CPU	Site3 Memory	Site4 CPU	Site4 Memory
mysql-cluster-db-db-backup-manager-svc/db-backup-manager-svc	1.00%	78.12%	1.00%	69.53%	3.00%	66.41%	-	-
mysql-cluster-db-db-monitor-svc/istio-proxy	0.06%	5.74%	0.08%	5.78%	0.06%	5.68%	-	-
mysql-cluster-db-db-monitor-svc/db-monitor-svc	2.00%	68.40%	6.00%	66.40%	33.00%	69.20%	-	-

Table 3-138 (Cont.) Observed Values of cnDBTier Services

Microservices	Site1 CPU	Site1 Memory	Site2 CPU	Site2 Memory	Site3 CPU	Site3 Memory	Site4 CPU	Site4 Memory
mysql-cluster-db-one-four-replication-svc/istio-proxy	0.06%	5.62%	-	-	-	-	-	-
mysql-cluster-db-one-four-replication-svc/one-four-replication-svc	0.25%	2.42%	-	-	-	-	-	-
mysql-cluster-db-one-three-replication-svc/istio-proxy	0.06%	5.74%	-	-	-	-	-	-
mysql-cluster-db-one-three-replication-svc/one-three-replication-svc	0.30%	2.39%	-	-	-	-	-	-
mysql-cluster-db-one-two-replication-svc/istio-proxy	0.15%	14.31%	-	-	-	-	-	-
mysql-cluster-db-one-two-replication-svc/one-two-replication-svc	0.30%	2.40%	-	-	-	-	-	-

Table 3-138 (Cont.) Observed Values of cnDBTier Services

Microservices	Site1 CPU	Site1 Memory	Site2 CPU	Site2 Memory	Site3 CPU	Site3 Memory	Site4 CPU	Site4 Memory
mysql-cluster-db-one-two-replication-svc/db-infra-monitor-svc	1.00%	19.53%	-	-	-	-	-	-
ndbapmmysqld/istio-proxy	10.54%	5.92%	0.23%	5.42%	0.26%	5.54%	-	-
ndbapmmysqld/mysqlndb cluster	14.12%	26.73%	0.13%	23.79%	0.14%	23.69%	-	-
ndbapmmysqld/db-infra-monitor-svc	1.11%	21.57%	1.44%	21.57%	1.44%	21.70%	-	-
ndbapmmysqld/init-sidecar	2.00%	0.43%	2.00%	0.39%	2.00%	0.43%	-	-
ndbmcmd/istio-proxy	0.70%	14.31%	0.70%	14.16%	0.60%	13.84%	-	-
ndbmcmd / mysqlndb cluster	0.15%	0.48%	0.17%	0.47%	0.17%	0.45%	-	-
ndbmcmd/db-infra-monitor-svc	1.00%	20.70%	1.00%	20.70%	1.00%	21.09%	-	-
ndbmt/istio-proxy	18.59%	6.78%	0.83%	6.77%	0.83%	6.80%	-	-
ndbmt/mysqlndb cluster	11.59%	88.13%	1.29%	88.13%	1.31%	88.14%	-	-
ndbmt/db-backup-executor-svc	1.00%	43.55%	1.00%	43.68%	1.00%	44.01%	-	-
ndbmt/db-infra-monitor-svc	4.42%	21.45%	3.00%	22.14%	1.33%	22.10%	-	-
ndbmysqld/istio-proxy	1.18%	5.47%	0.29%	5.49%	0.26%	5.51%	-	-

Table 3-138 (Cont.) Observed Values of cnDBTier Services

Microservices	Site1 CPU	Site1 Memory	Site2 CPU	Site2 Memory	Site3 CPU	Site3 Memory	Site4 CPU	Site4 Memory
ndbmysqld/ mysqlndb cluster	2.01%	25.00%	0.65%	22.51%	0.69%	22.55%	-	-
ndbmysqld/init- sidecar	2.00%	0.39%	2.00%	0.59%	2.00%	0.52%	-	-
ndbmysqld/db- infra- monitor- svc	1.83%	23.11%	1.83%	23.96%	1.17%	23.63%	-	-
mysql- cluster- db-two- four- replicatio n-svc/ istio-proxy	-	-	0.08%	5.62%	-	-	-	-
mysql- cluster- db-two- four- replicatio n-svc/ two-four- replicatio n-svc	-	-	0.25%	2.45%	-	-	-	-
mysql- cluster- db-two- one- replicatio n-svc/ istio-proxy	-	-	0.15%	14.21%	-	-	-	-
mysql- cluster- db-two- one- replicatio n-svc/ two-one- replicatio n-svc	-	-	0.30%	2.39%	-	-	-	-
mysql- cluster- db-two- one- replicatio n-svc/db- infra- monitor- svc	-	-	1.00%	19.92%	-	-	-	-

Table 3-138 (Cont.) Observed Values of cnDBTier Services

Microservices	Site1 CPU	Site1 Memory	Site2 CPU	Site2 Memory	Site3 CPU	Site3 Memory	Site4 CPU	Site4 Memory
mysql-cluster-db-two-three-replication-svc/istio-proxy	-	-	0.06%	5.68%	-	-	-	-
mysql-cluster-db-two-three-replication-svc/two-three-replication-svc	-	-	0.30%	2.43%	-	-	-	-
mysql-cluster-db-three-four-replication-svc/istio-proxy	-	-	-	-	0.56%	5.55%	-	-
mysql-cluster-db-three-four-replication-svc/three-four-replication-svc	-	-	-	-	0.30%	2.35%	-	-
mysql-cluster-db-three-one-replication-svc/istio-proxy	-	-	-	-	1.45%	15.04%	-	-
mysql-cluster-db-three-one-replication-svc/three-one-replication-svc	-	-	-	-	0.30%	2.37%	-	-

Table 3-138 (Cont.) Observed Values of cnDBTier Services

Microservices	Site1 CPU	Site1 Memory	Site2 CPU	Site2 Memory	Site3 CPU	Site3 Memory	Site4 CPU	Site4 Memory
mysql-cluster-db-three-one-replication-svc/db-infra-monitor-svc	-	-	-	-	1.00%	21.09%	-	-
mysql-cluster-db-three-two-replication-svc/istio-proxy	-	-	-	-	0.78%	5.61%	-	-
mysql-cluster-db-three-two-replication-svc/three-two-replication-svc	-	-	-	-	0.35%	2.40%	-	-

3.14.3 TPS and DB Statistics

Table 3-139 Overall TPS Ingress and Egress TPS to/from NF

Site	Total TPS	Rx	Nbsf
Site1	22.59K	8.2K	14.366K
Site 2	-	-	-
Site 3	-	-	-
Site 4	-	-	-

Observed values of cnDBTier Record counts:

Table 3-140 Database Records

DB Statistics	Read	Write	Commit
Site1	0.524K	0.901K	0.906K
Site2	0.036K	1.263K	0.046K
Site3	0.046K	1.433K	0.052K
Site4	-	-	-

3.14.4 Results

Table 3-141 Average Latency Observations (in milliseconds)

Attributes	Average Latency (ms)
Ingress	4.76
Egress	0.759
Diameter Gateway	0.175
BSF Management	3.09

Table 3-142 Average Current Percentile Latency Observations (in milliseconds)

NF	50th Percentile (ms)	90th Percentile (ms)	95th Percentile (ms)	99th Percentile (ms)
Ingress Gateway	3.42	4.34	4.83	12.9
Egress Gateway	0.874	1.07	1.07	1.07
Diameter Gateway	-	0.306	0.289	0.311