

Oracle® Communications

Network Analytics Data Director

Benchmarking Guide



Release 25.1.201

G32793-02

February 2026

The Oracle logo, consisting of a solid red square with the word "ORACLE" in white, uppercase, sans-serif font centered within it.

ORACLE®

Copyright © 2023, 2026, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

| | | |
|----------|---|----|
| 1 | Introduction | |
| 1.1 | Purpose and Scope | 1 |
| 1.2 | References | 1 |
| 2 | Deployment | |
| 3 | Resource Requirement | |
| 3.1 | Profile Resource Requirements | 1 |
| 3.1.1 | Resource Profile for Database | 2 |
| 3.1.2 | Resource Profile for OCNADD OAM Services | 3 |
| 3.1.3 | Resource Profile for OCNADD Worker Group Services | 3 |
| 3.1.3.1 | vCNE Cluster Environment | 4 |
| 3.1.3.2 | Bare Metal Cluster Environment | 6 |
| 3.1.3.3 | Resource Profile for OCI Environment | 39 |
| 3.2 | Pod Affinity (or Anti-affinity) Rules | 47 |
| 3.3 | Ephemeral Storage Requirements | 49 |
| 3.4 | Disk Throughput Requirements | 50 |
| 3.5 | Kafka PVC Storage Requirements | 51 |
| 4 | OCNADD Benchmarking Testing | |
| 4.1 | vCNE Cluster Environment | 1 |
| 4.1.1 | Performance Benchmarking for 360K MPS SCP and 450K Egress Traffic with TCP and HTTP2 Feed | 1 |
| 4.1.2 | Performance Benchmarking for 360K MPS SCP Traffic with Synthetic (TCP) Feed | 3 |
| 4.2 | Bare Metal Cluster Environment | 6 |
| 4.2.1 | CNLB | 6 |
| 4.2.1.1 | Performance Benchmarking for 360K MPS SCP and 450K Egress Traffic with Synthetic (TCP) and HTTP2 Feed | 6 |
| 4.2.1.2 | Performance Benchmarking for 360K MPS SCP Traffic with Synthetic (TCP) Feed | 9 |

| | | |
|---------|--|----|
| 4.2.1.3 | Performance Benchmarking for 270K MPS Aggregated Traffic with Synthetic (TCP) Feed | 11 |
| 4.2.1.4 | Performance Benchmarking for 270K MPS Aggregated Traffic with HTTP2 Feed | 15 |
| 4.2.2 | LBVM | 19 |
| 4.2.2.1 | Performance Benchmarking for 135K MPS Traffic with Synthetic Feed Replication | 19 |
| 4.2.2.2 | Performance Benchmarking for 270K MPS SCP Traffic with Synthetic Feed | 22 |
| 4.2.2.3 | Performance Benchmarking for 270K MPS SCP Traffic with Kafka Feed | 25 |
| 4.2.2.4 | Performance Benchmarking for 9K BSF Traffic with HTTP2 Feed | 27 |
| 4.2.2.5 | Performance Benchmarking for 30K MPS PCF Traffic with HTTP2 Feed | 30 |

Preface

- [Documentation Accessibility](#)
- [Diversity and Inclusion](#)
- [Conventions](#)

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Access to Oracle Support

Oracle customer access to and use of Oracle support services will be pursuant to the terms and conditions specified in their Oracle order for the applicable services.

Diversity and Inclusion

Oracle is fully committed to diversity and inclusion. Oracle respects and values having a diverse workforce that increases thought leadership and innovation. As part of our initiative to build a more inclusive culture that positively impacts our employees, customers, and partners, we are working to remove insensitive terms from our products and documentation. We are also mindful of the necessity to maintain compatibility with our customers' existing technologies and the need to ensure continuity of service as Oracle's offerings and industry standards evolve. Because of these technical constraints, our effort to remove insensitive terms is ongoing and will take time and external cooperation.

Conventions

The following text conventions are used in this document:

| Convention | Meaning |
|-----------------|--|
| boldface | Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary. |
| <i>italic</i> | Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values. |
| monospace | Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter. |

My Oracle Support (MOS)

My Oracle Support (<https://support.oracle.com>) is your initial point of contact for all product support and training needs. A representative at Customer Access Support can assist you with My Oracle Support registration.

Call the Customer Access Support main number at 1-800-223-1711 (toll-free in the US), or call the Oracle Support hotline for your local country from the list at <http://www.oracle.com/us/support/contact/index.html>. When calling, make the selections in the sequence shown below on the Support telephone menu:

- For Technical issues such as creating a new Service Request (SR), select **1**.
- For Non-technical issues such as registration or assistance with My Oracle Support, select **2**.
- For Hardware, Networking and Solaris Operating System Support, select **3**.

You are connected to a live agent who can assist you with My Oracle Support registration and opening a support ticket.

My Oracle Support is available 24 hours a day, 7 days a week, 365 days a year.

Acronyms

The following table provides information about the acronyms used in the document.

Table Acronyms

| Acronym | Description |
|----------------|---|
| BSF | Oracle Communications Cloud Native Core, Binding Support Function |
| CNE | Oracle Communications Cloud Native Core, Cloud Native Environment |
| MPS | Messages Per Second |
| NDB | Network Data Broker |
| NRF | Oracle Communications Cloud Native Core, Network Repository Function |
| NVME | Non Volatile Memory Express |
| OCI | Oracle Cloud Infrastructure |
| OCNADD | Oracle Communications Network Analytics Data Director |
| OCPU | Oracle Compute Unit |
| PCF | Oracle Communications Cloud Native Core, Policy Control Function |
| SCP | Oracle Communications Cloud Native Core, Service Communication Proxy |
| SEPP | Oracle Communications Cloud Native Core, Security Edge Protection Proxy |
| xDR | Extended Detail Record |

What's New in This Guide

This section lists the documentation updates for Release 25.1.2xx in *Oracle Communications Network Analytics Data Director Benchmarking Guide*.

Release 25.1.201 - G32793-02, February 2026

There are no updates to this document in this release.

Release 25.1.200 - G32793-01, July 2025

Updated the following sections:

- Added the following resource profiles in [Resource Requirement](#) chapter:
 - [Egress 360K MPS Synthetic \(TCP\) Feed](#)
 - [Egress 450K MPS Synthetic \(TCP\) or HTTP2 Feed](#)
 - [Aggregated 270K MPS TCP or HTTP2 Feed](#)
 - [Aggregated 270K MPS Kafka Feed](#)
- Added the following scenarios in [OCNADD Benchmarking Testing](#) chapter:
 - [Performance Benchmarking for 360K MPS SCP Traffic with Synthetic \(TCP\) Feed](#)
 - [Performance Benchmarking for 360K MPS SCP and 450K Egress Traffic with Synthetic \(TCP\) and HTTP2 Feed](#)
 - [Performance Benchmarking for 270K MPS Aggregated Traffic with Synthetic \(TCP\) Feed](#)
 - [Performance Benchmarking for 270K MPS Aggregated Traffic with HTTP2 Feed](#)
 - [Performance Benchmarking for 360K MPS SCP Traffic with Synthetic \(TCP\) Feed](#)
 - [Performance Benchmarking for 360K MPS SCP and 450K Egress Traffic with TCP and HTTP2 Feed](#)

1

Introduction

Oracle Communications Network Analytics Data Director (OCNADD) is a specialized Network Data Broker (NDB) in 5G Network Architecture.

OCNADD receives network traffic data from various sources, 5G network functions (NFs), Non-5G NFs, and third-party producers, performs filtering, replication, and aggregation on the received data according to the rules implemented by the subscribed third-party consumers. OCNADD then sends the filtered, replicated, or aggregated data to the subscribed third-party consumers (third-party consumer applications or platforms) securely.

1.1 Purpose and Scope

This document is designed to measure the performance and capacity of OCNADD deployment and resource requirements.

1.2 References

For more information about OCNADD, see the following documents:


- *Oracle Communications Network Analytics Data Director Installation, Upgrade, and Fault Recovery Guide*
- *Oracle Communications Network Analytics Data Director User Guide*
- *Oracle Communications Cloud Native Core OCI Adaptor, NF Deployment on OCI Guide*

2

Deployment

OCNADD supports CNE and OCI deployment. There are a few variations in the deployment process for both the platforms. For more information about OCNADD installation, see *Oracle Communications Network Analytics Data Director Installation, Upgrade, and Fault Recovery Guide*.

The following diagram depicts the OCNADD deployment in the 5G architecture:

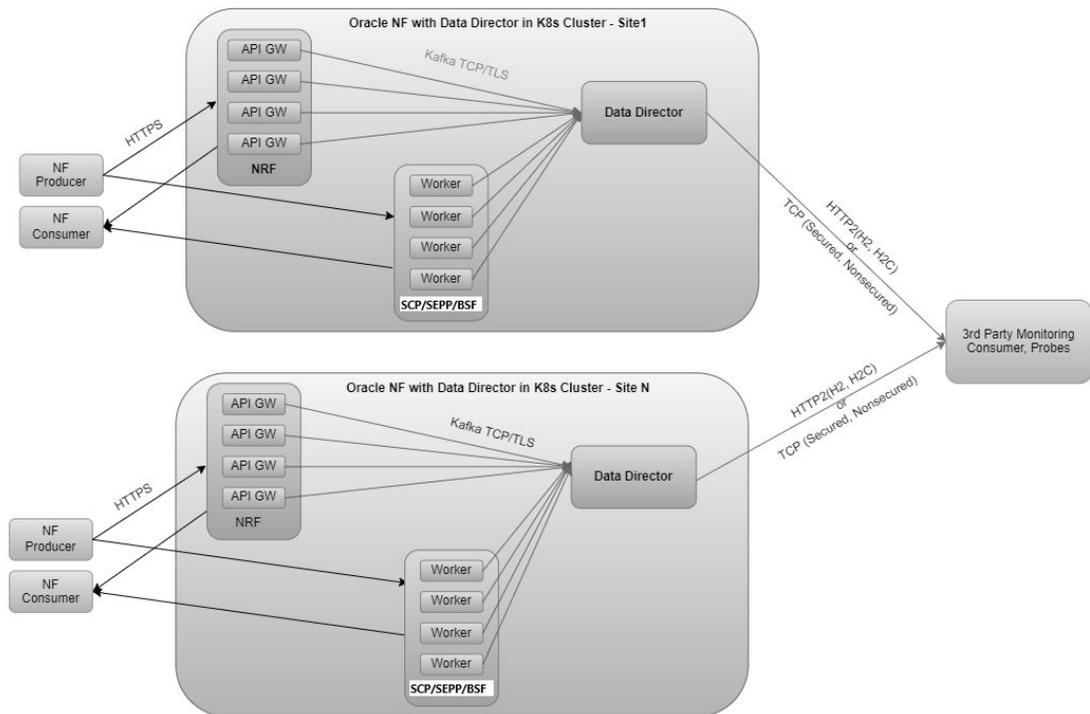

OCNADD uses the following common services of CNE:

- Kubernetes
- Prometheus
- Metallb (Load balancer)
- CNLB
- cnDBTier

3

Resource Requirement

This chapter provides information about the resource requirements to install and run Oracle Communications Network Analytics Data Director (OCNADD) with the desired Message Per Second (MPS) profiles.

Resource Requirements for CNE Environment

Resource requirements for Baremetal (with NVMe):

Table 3-1 Bare Metal Environment

| Type of Server | X9 Server and NVME |
|----------------|--------------------|
| Master node | 3 |
| Worker node | 19 |
| Storage Class | Standard |

Resource Requirements for OCI Environment

- OCI block volume is attached to the PVC with auto-tune based performance from balanced to high performance. To change block volume to auto-tune based performance (Balance to High Performance), see [Changing the Performance of a Volume](#).
- All tests are performed with the default round-robin based ordering.
- Resource requirements may vary after enabling key or custom based ordering and running traffic with actual NFs.

Table 3-2 OKE Worker Nodes

| Type of Server | OCI Hardware |
|-----------------------|---------------------|
| Worker nodes | 6 |
| Instance Shape | VM.Standard.E4.Flex |
| OCPUs in worker node | 50 (CPU: 100) |
| Memory in worker node | 194 GB |

3.1 Profile Resource Requirements

This section provides information about the profile resource requirements to install and run Oracle Communications Network Analytics Data Director (OCNADD) with the desired Message Per Second (MPS) profiles.

Note

It is recommended to have the following configurations for Baremetal setup to achieve the required throughput:

- Jumbo frames should be enabled.
- Ring buffer size should be increased to avoid packet drop at interfaces.
- FluentD pods should not be in "CrashLoopBackOff" state due to Out of Memory error. For more information see "High Latency in adapter feeds due to high disk latency" section in *Oracle Communications Network Analytics Data Director Troubleshooting Guide*.

- [Resource Profile for Database](#)
- [Resource Profile for OCNADD OAM Services](#)
- [Resource Profile for OCNADD Worker Group Services](#)
- [Resource Profile for OCI Environment](#)

3.1.1 Resource Profile for Database

This section provides information about the database profile resource requirements to install and run Oracle Communications Network Analytics Data Director (OCNADD) with the desired Message Per Second (MPS) profiles.

Table 3-3 Resource Requirement

| cnDBTier Pods | Min vCPU | Max vCPU | Min Memory | Max Memory | Total Replica |
|--|----------|----------|------------|------------|---------------|
| SQL (ndbmysqld) Kubernetes Resource Type: StatefulSet | 1 | 1 | 1Gi | 1Gi | 0 |
| SQL (ndbappmysqld) Kubernetes Resource Type: Statefulset | 1 | 1 | 1Gi | 1Gi | 2 |
| MGMT (ndbmgmd) Kubernetes Resource Type: StatefulSet | 1 | 1 | 1Gi | 1Gi | 2 |
| Database (ndbmtd) Kubernetes Resource Type: StatefulSet | 1 | 1 | 4Gi | 4Gi | 2 |
| Backup Manager Service (db-backup-manager-svc) Kubernetes Resource Type: Deployment | 0.1 | 0.1 | 128Mi | 128Mi | 1 |
| Monitor Service (db-monitor-svc) Kubernetes Resource Type: Deployment | 0.2 | 0.2 | 500Mi | 500Mi | 1 |
| EXTENDED STORAGE is ENABLED in CORRELATION Feed(Per Correlation Feed) Rate Supported in current release: 1K MPS rate with 24 hours retention Update "global.ndb.datamemory=96G" in custom-value.yaml of cndbTier PVC of ndbmtd= 150GB | | | | | |

Table 3-3 (Cont.) Resource Requirement

| cnDBTier Pods | Min vCPU | Max vCPU | Min Memory | Max Memory | Total Replica |
|---|----------|----------|------------|------------|---------------|
| Database (ndbmttd) Kubernetes Resource Type: StatefulSet | 8 | 8 | 128Gi | 128Gi | 4 |

Note

Configure "**datamemory: 1G**" under "**ndbmttd**" section while deploying the CnDbTier for OCNADD. For more details on cnDBTier resource profile, see "cnDBTier Small Profile" section in *cnDBTier Resource Models Guide*.

3.1.2 Resource Profile for OCNADD OAM Services

The following profile is used for management group services in all the performance scenarios.

Table 3-4 Resource Requirement

| Service Name | vCPU | Memory Required (Gi) | Total Replica | Description |
|------------------------|------|----------------------|---------------|---|
| ocnaddconfiguration | 1 | 1 | 1 | - |
| ocnaddalarm | 1 | 1 | 1 | - |
| ocnaddadmin | 1 | 1 | 1 | - |
| ocnaddhealthmonitoring | 1 | 1 | 1 | - |
| ocnaddgui | 1 | 1 | 1 | - |
| ocnadduirouter | 1 | 1 | 1 | - |
| ocnaddexport | 0.5 | 1 | 1 | Resource requirement will increase when export is configured. For more details, see Correlated 30K MPS Kafka Feed . |
| ocnaddredundancyagent | 1 | 1 | 1 | Required only when Georedundancy is enabled for OCNADD. |

3.1.3 Resource Profile for OCNADD Worker Group Services

The following profile shall be used for worker group services. The resource profile for worker group services will vary based on the scenario to be executed.

Note

To support the increased throughput, the number of topic partitions should be increased. For more details on this, see "Adding Partitions to an Existing Topic" in the *Oracle Communications Network Analytics Data Director User Guide*.

3.1.3.1 vCNE Cluster Environment

This section gives the details of the LBVM vCNE Cluster Environment.

- **Hardware Type:** X9-2 Server
- **Disk Type:** NVMe
- **Master node:** 3
- **Worker node:** 44
- **LoadBalancer node:** LBVM

3.1.3.1.1 Egress 360K MPS Synthetic (TCP) Feed

Note

DD services and SCP NF services are deployed with anti-affinity enabled at the node level in same cluster.

- **Replication Factor:** 1
- **Message Size:** 3500
- **Feed Type:** TCP
- **FILTER:** OFF

360K MPS SCP Profile(Ingress to DD)

Table 3-5 360K MPS SCP Profile(Ingress to DD)

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|--------------------------------------|------|----------------------|---------------|--------------------------------------|
| kraft-controller | 1 | 2 | 3 | - |
| ocnaddkafka (kafkaBroker) | 5 | 48 | 11 | - |
| ocnaddscpaggregation | 2 | 4 | 13 | SCP =78 (Each instance 6 partition) |
| ocnaddadapter(TCP) (consumeradapter) | 3 | 6 | 20 | MAIN=120 (Each instance 6 partition) |

Note

- Additional memory is required for the SCP aggregation service if the Metadata Enrichment feature is enabled and the values of the properties "METADATA_MAP_CACHE_EXPIRY_TIME_MS" and "METADATA_MAP_CACHE_SCHEDULER_TIME_MS" are increased to higher values.
- The end-to-end latency may increase based on "METADATA_MAP_CACHE_EXPIRY_TIME_MS" and "METADATA_MAP_CACHE_SCHEDULER_TIME_MS" is increased to a higher value.
- More instances of the Kafka broker might be required when running with **RF=2**, depending on setup performance, and end-to-end latency might increase if disk I/O is slow.
- For DISK I/O, see [Disk Throughput Requirements](#).
- For Kafka PVC-Storage, see [Kafka PVC Storage Requirements](#).

3.1.3.1.2 Egress 450K MPS Synthetic (TCP) or HTTP2 Feed

vCNE Cluster Environment

Note

DD services and SCP NF services are deployed with anti-affinity enabled at the node level in same cluster.

- **Replication Factor:** 1
- **Message Size:** 3500
- **Feed Type:** TCP, HTTP2
- **FILTER:** OFF

360K MPS SCP Profile(Ingress to DD)**Table 3-6 360K MPS SCP Profile(Ingress to DD)**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|--------------------------------------|------|----------------------|---------------|--------------------------------------|
| kraft-controller | 1 | 2 | 3 | - |
| ocnaddkafka (kafkaBroker) | 5 | 96 | 16 | - |
| ocnaddscpaggregation | 2 | 4 | 13 | SCP =78 (Each instance 6 partition) |
| ocnaddadapter(TCP) (consumeradapter) | 3 | 6 | 20 | MAIN=120 (Each instance 6 partition) |

Table 3-6 (Cont.) 360K MPS SCP Profile(Ingress to DD)

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|---|------|----------------------|---------------|--|
| ocnaddadapter(TCP) (consumeradapter, 360K MPS ingress and 36K MPS egress with Filter) | 3 | 10 | 7 | No partition change as MAIN topic already has 120 partition. |
| ocnaddadapter(TCP) (consumeradapter, 360K MPS ingress and 36K MPS egress with Filter) | 3 | 10 | 7 | No partition change as MAIN topic already has 120 partition. |
| ocnaddadapter(HT TP2) (consumeradapter, 360K MPS ingress and 18K MPS egress with Filter) | 3 | 30 | 5 | No partition change as MAIN topic already has 120 partition. |

Note

- Additional memory and/or replica is required for SCP aggregation service if Metadata cache feature is enabled and value of properties "METADATA_MAP_CACHE_EXPIRY_TIME_MS" and "METADATA_MAP_CACHE_SCHEDULER_TIME_MS" is increased to a higher value.
- The end-to-end latency may increase based on: "**Timer Expiry Value + Processing Time + RF2/RF1 Processing Time + third-party Response Time (for HTTP2 feed)**".
- More instances of the Kafka broker might be required when running with **RF=2**, depending on setup performance, and end-to-end latency might increase if disk I/O is slow.
- For DISK I/O, see [Disk Throughput Requirements](#).
- For Kafka PVC-Storage, see [Kafka PVC Storage Requirements](#).

3.1.3.2 Bare Metal Cluster Environment

This section gives the details of the Bare Metal Cluster Environment.

3.1.3.2.1 CNLB

This section gives the details of the CNLB Bare Metal Cluster Environment.

- **Hardware Type:** X9-2 Server
- **Disk Type:** NVMe
- **Master node:** 3

- **Worker node:** 19
- **LoadBalancer node:** CNLB

3.1.3.2.1.1 Egress 360K MPS Synthetic (TCP) Feed

① Note

There are two separate clusters: one dedicated to OCNADD services, and another shared by SCP NF services and third-party application services.

- **Replication Factor:** 1
- **Message Size:** 3500
- **Feed Type:** TCP
- **FILTER:** OFF

360K MPS SCP Profile(Ingress to DD)

Table 3-7 360K MPS SCP Profile(Ingress to DD)

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|--------------------------------------|------|----------------------|---------------|--------------------------------------|
| kraft-controller | 1 | 2 | 3 | - |
| ocnaddkafka (kafkaBroker) | 5 | 48 | 11 | - |
| ocnaddscpaggregation | 2 | 4 | 13 | SCP =78 (Each instance 6 partition) |
| ocnaddadapter(TCP) (consumeradapter) | 3 | 6 | 20 | MAIN=120 (Each instance 6 partition) |

① Note

- Additional memory is required for the SCP aggregation service if the Metadata Enrichment feature is enabled and the values of the properties "METADATA_MAP_CACHE_EXPIRY_TIME_MS" and "METADATA_MAP_CACHE_SCHEDULER_TIME_MS" are set to higher values.
- End-to-end latency may increase based on "**Timer Expiry Value + Processing Time+ RF2/RF1 Processing Time**".
- More Kafka broker instances might be required when running with **RF=2**, depending on the system's performance. End-to-end latency may also increase if disk I/O is slow.
- For DISK I/O, see [Disk Throughput Requirements](#).
- For Kafka PVC-Storage, see [Kafka PVC Storage Requirements](#).

3.1.3.2.1.2 Egress 450K MPS Synthetic (TCP) or HTTP2 Feed

Bare Metal Cluster Environment

Note

There are two separate clusters: one dedicated to OCNADD services, and another shared by SCP NF services and third-party application services.

- **Replication Factor:** 1
- **Message Size:** 3500
- **Feed Type:** TCP or HTTP2
- **FILTER:** OFF

360K MPS SCP Profile(Ingress to DD)

Table 3-8 360K MPS SCP Profile(Ingress to DD)

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|---|------|----------------------|---------------|--|
| kraft-controller | 1 | 2 | 3 | - |
| ocnaddkafka (kafkaBroker) | 5 | 96 | 16 | - |
| ocnaddscpaggregation | 2 | 4 | 13 | SCP =78 (Each instance 6 partition) |
| ocnaddadapter(TCP) (consumeradapter) | 3 | 6 | 20 | MAIN=120 (Each instance 6 partition) |
| ocnaddadapter(TCP) (consumeradapter, 360K MPS ingress and 36K MPS egress with Filter) | 3 | 10 | 7 | No partition change as MAIN topic already has 120 partition. |
| ocnaddadapter(TCP) (consumeradapter, 360K MPS ingress and 36K MPS egress with Filter) | 3 | 10 | 7 | No partition change as MAIN topic already has 120 partition. |
| ocnaddadapter(HTTP2) (consumeradapter, 360K MPS ingress and 18K MPS egress with Filter) | 3 | 28 | 5 | No partition change as MAIN topic already has 120 partition. |

Note

- Additional memory and/or replica is required for SCP aggregation service if Metadata cache feature is enabled and value of properties. "METADATA_MAP_CACHE_EXPIRY_TIME_MS" and "METADATA_MAP_CACHE_SCHEDULER_TIME_MS" is increased to a higher value.
- The end-to-end latency may increase based on: "Timer Expiry Value + Processing Time + RF2/RF1 Processing Time + third-party Response Time (for HTTP2 Feed)".
- More instances of the Kafka broker might be required when running with RF=2, depending on setup performance, and end-to-end latency might increase if disk I/O is slow.
- For DISK I/O, see [Disk Throughput Requirements](#).
- For Kafka PVC-Storage, see [Kafka PVC Storage Requirements](#).

3.1.3.2.1.3 Aggregated 270K MPS TCP or HTTP2 Feed

When Weighted Load Balancing is ON/OFF and Filter is OFF

- **Replication Factor:** 1
- **Message Size:** 3500
- **Feed Type:** HTTP2 or TCP (single feed at a time either HTTP2 or TCP will be present)
- **FILTER:** OFF
- **Message Sequencing/Filter/Metadata:** OFF

15K NRF Profile**Table 3-9 15K NRF Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|----------------------|------|----------------------|---------------|------------------|
| kraft-controller | 1 | 2 | 3 | - |
| ocnaddkafka | 2 | 24 | 3 | - |
| ocnaddnrfaggregation | 2 | 4 | 1 | NRF=6 |
| ocnaddadapter(HTTP2) | 3 | 3 | 2 | MAIN=18 |
| ocnaddadapter(TCP) | 3 | 3 | 1 | MAIN=18 |

9K BSF Profile**Table 3-10 9K BSF Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|------------------|------|----------------------|---------------|------------------|
| kraft-controller | 1 | 2 | 3 | - |
| ocnaddkafka | 2 | 24 | 3 | - |

Table 3-10 (Cont.) 9K BSF Profile

| | | | | |
|----------------------|---|---|---|---------|
| ocnaddbsfaggregation | 2 | 4 | 1 | BSF=6 |
| ocnaddadapter(HTP2) | 3 | 3 | 1 | MAIN=18 |
| ocnaddadapter(TCP) | 3 | 3 | 1 | MAIN=18 |

58K PCF Profile**Table 3-11 58K PCF Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|----------------------|------|----------------------|---------------|------------------|
| kraft-controller | 1 | 2 | 3 | - |
| ocnaddkafka | 5 | 24 | 3 | - |
| ocnaddpcgaggregation | 2 | 4 | 2 | PCF=12 |
| ocnaddadapter(HTP2) | 3 | 8 | 4 | MAIN=36 |
| ocnaddadapter(TCP) | 3 | 4 | 3 | MAIN=36 |

128K SCP Profile**Table 3-12 128K SCP Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|----------------------|------|----------------------|---------------|------------------|
| kraft-controller | 1 | 2 | 3 | - |
| ocnaddkafka | 6 | 48 | 4 | - |
| ocnaddscpaggregation | 2 | 4 | 7 | SCP=30 |
| ocnaddadapter(HTP2) | 3 | 16 | 10 | MAIN=90 |
| ocnaddadapter(TCP) | 3 | 6 | 6 | MAIN=90 |

60K SEPP Profile**Table 3-13 60K SEPP Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|-----------------------|------|----------------------|---------------|------------------|
| kraft-controller | 1 | 2 | 3 | - |
| ocnaddkafka | 5 | 24 | 3 | - |
| ocnaddseppaggregation | 2 | 4 | 2 | SEPP=12 |
| ocnaddadapter(HTP2) | 3 | 8 | 4 | MAIN=36 |

Table 3-13 (Cont.) 60K SEPP Profile

| | | | | |
|---------------------|---|---|---|---------|
| ocnaddadapter(TC P) | 3 | 4 | 3 | MAIN=36 |
|---------------------|---|---|---|---------|

270K Aggregated Profile (SCP:128K, NRF:15K, SEPP:60K, PCF=58K, BSF: 9k)**Table 3-14 270K Aggregated Profile (SCP:128K, NRF:15K, SEPP:60K, PCF=58K, BSF: 9k)**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|-----------------------|------|----------------------|---------------|---|
| kraft-controller | 1 | 2 | 3 | - |
| ocnaddkafka | 4 | 48 | 11 | - |
| ocnaddscppaggregation | 2 | 4 | 5 | SCP=30 (Each Instance 6 partition) |
| ocnaddpcgaggregation | 2 | 4 | 3 | PCF=18 (Each Instance 6 partition) |
| ocnaddbsfaggregation | 2 | 4 | 1 | BSF=6 (Each Instance 6 partition) |
| ocnaddnrfaggregation | 2 | 4 | 1 | NRF=6 (Each Instance 6 partition) |
| ocnaddseppaggregation | 2 | 4 | 3 | SEPP=18 (Each Instance 6 partition) |
| ocnaddadapter(HT TP2) | 3 | 24 | 23 | MAIN=207 (Each Instance 9 partition) |
| ocnaddadapter(TC P) | 3 | 6 | 15 | MAIN=90 (Each Instance 6 partition) |

270K SCP Profile**Table 3-15 270K SCP Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|-----------------------|------|----------------------|---------------|---|
| kraft-controller | 1 | 2 | 3 | - |
| ocnaddkafka | 4 | 48 | 11 | - |
| ocnaddscppaggregation | 2 | 4 | 10 | SCP=60 (Each Instance 6 partition) |
| ocnaddadapter(HT TP2) | 3 | 24 | 23 | MAIN=207 (Each Instance 9 partition) |

Table 3-15 (Cont.) 270K SCP Profile

| | | | | |
|--------------------|---|---|----|--|
| ocnaddadapter(TCP) | 3 | 6 | 15 | MAIN=90 (Each Instance 6 partition) |
|--------------------|---|---|----|--|

3.1.3.2.1.4 Aggregated 270K MPS Kafka Feed

When Weighted Load Balancing is ON/OFF and Filter is OFF

- **Replication Factor:** 1
- **Message Size:** 3500
- **Feed Type:** Kafka
- **FILTER:** OFF
- **Message Sequencing/Filter/Metadata:** OFF

15K NRF Profile**Table 3-16 15K NRF Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|----------------------|------|----------------------|---------------|------------------|
| kraft-controller | 1 | 2 | 3 | - |
| ocnaddkafka | 2 | 24 | 3 | - |
| ocnaddnrfaggregation | 2 | 4 | 1 | NRF=6 |

9K BSF Profile**Table 3-17 9K BSF Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|----------------------|------|----------------------|---------------|------------------|
| kraft-controller | 1 | 2 | 3 | - |
| ocnaddkafka | 2 | 24 | 3 | - |
| ocnaddbsfaggregation | 2 | 4 | 1 | BSF=6 |

58K PCF Profile**Table 3-18 58K PCF Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|----------------------|------|----------------------|---------------|------------------|
| kraft-controller | 1 | 2 | 3 | - |
| ocnaddkafka | 5 | 24 | 3 | - |
| ocnaddpcgaggregation | 2 | 4 | 2 | PCF=12 |

128K SCP Profile

Table 3-19 128K SCP Profile

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|-----------------------|------|----------------------|---------------|------------------|
| kraft-controller | 1 | 2 | 3 | - |
| ocnaddkafka | 6 | 48 | 4 | - |
| ocnaddscppaggregation | 2 | 4 | 7 | SCP=42 |

60K SEPP Profile**Table 3-20 60K SEPP Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|-----------------------|------|----------------------|---------------|------------------|
| kraft-controller | 1 | 2 | 3 | - |
| ocnaddkafka | 5 | 24 | 3 | - |
| ocnaddseppaggregation | 2 | 4 | 2 | SEPP=12 |

270K Aggregated Profile (SCP:128K NRF:15K SEPP:60K, PCF=58K, BSF=9K))**Table 3-21 270K Aggregated Profile (SCP:128K NRF:15K SEPP:60K, PCF=58K, BSF=9K))**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|-----------------------|------|----------------------|---------------|--|
| kraft-controller | 1 | 2 | 3 | - |
| ocnaddkafka | 4 | 48 | 11 | - |
| ocnaddscppaggregation | 2 | 4 | 5 | SCP=30 (Each Instance 6 partition) |
| ocnaddpcgaggregation | 2 | 4 | 3 | PCF=18 (Each Instance 6 partition) |
| ocnaddbsfaggregation | 2 | 4 | 1 | BSF=6 (Each Instance 6 partition) |
| ocnaddnrfaggregation | 2 | 4 | 1 | NRF=6 (Each Instance 6 partition) |
| ocnaddseppaggregation | 2 | 4 | 3 | SEPP=18 (Each Instance 6 partition) |

270K SCP Profile

Table 3-22 270K SCP Profile

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|----------------------|------|----------------------|---------------|---------------------------------------|
| kraft-controller | 1 | 2 | 3 | - |
| ocnaddkafka | 4 | 48 | 11 | - |
| ocnaddscpaggregation | 2 | 4 | 10 | SCP=60 (Each Instance 6 partition) |

Note

Number of partition in MAIN topic will be decided based on third-party Kafka consumer.

3.1.3.2.2 LBVM

This section gives the details of the LBVM Bare Metal Cluster Environment.

- **Hardware Type:** X9-2 Server
- **Disk Type:** NVMe
- **Master node:** 3
- **Worker node:** 19
- **LoadBalancer node:** LBVM

3.1.3.2.2.1 Aggregated 135K MPS HTTP2 Feed

When Weighted Load Balancing is ON/OFF and Filter is OFF

- **Replication Factor:** 1
- **Message Size:** 3500
- **Feed Type:** HTTP2
- **FILTER:** OFF
- **WLB:** WLB is ON/OFF

15K NRF Profile

Table 3-23 15K NRF Profile

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|------------------------------------|------|----------------------|---------------|------------------------------------|
| zookeeper | 1 | 1 | 3 | - |
| kafkaBroker | 2 | 24 | 3 | - |
| kafkaBroker (with replicated feed) | 2 | 24 | 3 | - |
| ocnaddnrffaggregation | 2 | 2 | 1 | NRF=6 (Each Instance 6 partitions) |

Table 3-23 (Cont.) 15K NRF Profile

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|------------------------------|------|----------------------|---------------|------------------|
| consumeradapter (HTTP2 feed) | 3 | 3 | 2 | MAIN=18 |

90K SCP Profile**Table 3-24 90K SCP Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|------------------------------------|------|----------------------|---------------|-------------------------------------|
| zookeeper | 1 | 1 | 3 | - |
| kafkaBroker | 6 | 48 | 4 | - |
| kafkaBroker (with replicated feed) | 7 | 48 | 4 | - |
| ocnaddscpaggregation | 2 | 4 | 5 | SCP=30 (Each Instance 6 partitions) |
| consumeradapter (HTTP2 feed) | 3 | 16 | 10 | MAIN=90 |

30K SEPP Profile**Table 3-25 30K SEPP Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|------------------------------------|------|----------------------|---------------|--------------------------------------|
| zookeeper | 1 | 1 | 3 | - |
| kafkaBroker | 5 | 18 | 3 | - |
| kafkaBroker (with replicated feed) | 6 | 24 | 3 | - |
| ocnaddseppaggregation | 2 | 4 | 2 | SEPP=12 (Each Instance 6 partitions) |
| consumeradapter (HTTP2 feed) | 3 | 8 | 4 | MAIN=36 |

135K Profile (SCP: 90K, NRF: 15K, SEPP: 30K)**Table 3-26 135K Profile (SCP: 90K, NRF: 15K, SEPP: 30K)**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|------------------------------------|------|----------------------|---------------|------------------|
| zookeeper | 1 | 1 | 3 | - |
| kafkaBroker | 6.5 | 48 | 6 | - |
| kafkaBroker (with replicated feed) | 7.5 | 96 | 6 | - |

Table 3-26 (Cont.) 135K Profile (SCP: 90K, NRF: 15K, SEPP: 30K)

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|------------------------------|------|----------------------|---------------|---------------------------------------|
| ocnaddscppaggregation | 2 | 4 | 5 | SCP=30 (Each Instance 6 partitions) |
| ocnaddnrfaggregation | 2 | 2 | 1 | NRF=6 (Each Instance 6 partitions) |
| ocnaddseppaggregation | 2 | 4 | 2 | SEPP=12 (Each Instance 6 partitions) |
| consumeradapter (HTTP2 feed) | 3 | 24 | 15 | MAIN=135 (Each instance 9 partitions) |

135K SCP Profile**Table 3-27 135K SCP Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|------------------------------------|------|----------------------|---------------|---|
| zookeeper | 1 | 1 | 3 | - |
| kafkaBroker | 6.5 | 48 | 6 | - |
| kafkaBroker (with replicated feed) | 7.5 | 96 | 6 | - |
| ocnaddscppaggregation | 2 | 4 | 8 | SCP=48 (Each Instance 6 partitions) |
| consumeradapter (HTTP2 feed) | 3 | 24 | 15 | MAIN=135 (Each instance 9-5 partitions) |

When Weighted Load Balancing is ON/OFF and Filter is ON

- **Replication Factor:** 1
- **Message Size:** 3500
- **Feed Type:** HTTP2
- **FILTER:** ON
- **WLB:** WLB is ON/OFF

15K NRF Profile**Table 3-28 15K NRF Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|---|------|----------------------|---------------|-------------------------------------|
| ocnaddnrfaggregation (Ingress Filter is ON) | 2 | 2 | 2 | NRF=12 (Each Instance 6 partitions) |

Table 3-28 (Cont.) 15K NRF Profile

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|--|------|----------------------|---------------|--------------------------------------|
| consumeradapter (HTTP2 feed with Egress Filter ON) | 3 | 3 | 3 | MAIN=27 (Each instance 9 partitions) |

90K SCP Profile**Table 3-29 90K SCP Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|--|------|----------------------|---------------|--------------------------------------|
| ocnaddscppaggregation (Ingress Filter is ON) | 2 | 4 | 6 | SCP=36 (Each Instance 6 partitions) |
| consumeradapter (HTTP2 feed with Egress Filter ON) | 3 | 3 | 11 | MAIN=99 (Each instance 9 partitions) |

30K SEPP Profile**Table 3-30 30K SEPP Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|--|------|----------------------|---------------|--------------------------------------|
| ocnaddseppaggregation (Ingress Filter is ON) | 2 | 2 | 3 | SEPP=18 (Each Instance 6 partitions) |
| consumeradapter (HTTP2 feed with Egress Filter ON) | 3 | 3 | 5 | MAIN=45 (Each instance 9 partitions) |

135K Profile (SCP: 90K, NRF: 15K, SEPP: 30K)**Table 3-31 135K Profile (SCP: 90K, NRF: 15K, SEPP: 30K)**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|--|------|----------------------|---------------|---------------------------------------|
| ocnaddscppaggregation (Ingress Filter is ON) | 2 | 4 | 6 | SCP=36 (Each Instance 6 partitions) |
| ocnaddnrffaggregation (Ingress Filter is ON) | 2 | 2 | 2 | NRF=12 (Each Instance 6 partitions) |
| ocnaddseppaggregation (Ingress Filter is ON) | 2 | 4 | 3 | SEPP=18 (Each Instance 6 partitions) |
| consumeradapter (HTTP2 feed with Egress Filter ON) | 3 | 24 | 16 | MAIN=144 (Each instance 9 partitions) |

135K SCP Profile**Table 3-32 135K SCP Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|--|------|----------------------|---------------|---------------------------------------|
| ocnaddscpaggregation (Ingress Filter is ON) | 2 | 4 | 9 | SCP=54 (Each Instance 6 partitions) |
| consumeradapter (HTTP2 feed with Egress Filter ON) | 3 | 24 | 16 | MAIN=144 (Each instance 9 partitions) |

Note

- When advanced features such as Ingress filtering, Egress filtering, and Weighted load balancing are enabled simultaneously, the resource requirement for "consumeradapter" service may vary at higher throughput.
- Filter is not tested with replicated feed enabled due to disk I/O limitation.
- Resource requirement may vary when Filter is ON based on % data allowed after filtering and number of filter conditions with configured values.
- Five or Six instances of Kafka brokers might be required when running RF=2, based on the setup performance. The end-to-end latency might increase when DISK I/O is slow.
- For DISK I/O, see [Disk Throughput Requirements](#).
- For Kafka PVC-Storage, see [Kafka PVC Storage Requirements](#).

3.1.3.2.2.2 SCP 270K MPS HTTP2 Feed**When Weighted Load Balancing is ON/OFF and Filter is OFF**

- **Replication Factor:** 1
- **Message Size :** 3500
- **FEED Type:** HTTP2
- **FILTER:** OFF
- **WLB:** WLB is ON/OFF

Table 3-33 270K MPS HTTP2 FEED

| Services | vCPU | Memory Required (Gi) | Total Replica | Topic Partition |
|----------------------|------|----------------------|---------------|------------------------------------|
| zookeeper | 1 | 1 | 3 | - |
| kafkaBroker | 5 | 48 | 11 | - |
| ocnaddscpaggregation | 2 | 4 | 11 | SCP=66 (Each instance 6 partition) |

Table 3-33 (Cont.) 270K MPS HTTP2 FEED

| Services | vCPU | Memory Required (Gi) | Total Replica | Topic Partition |
|--|------|----------------------|---------------|---|
| ocnaddscpaggregation MESSAGE SEQUENCING =ON DD METADATA = ON/OFF | 2 | 48 | 14 | SCP=84 (Each instance 6 partition) |
| consumeradapter (HTTP2 feed) | 3 | 24 | 29 | MAIN=261 (Each instance 6 partition) |

Note

- The number of instance for SCP aggregation may increase from defined number in resource profile based on message sequencing timer expiry configuration (using Max timer expiry value) and Transaction success rate.
- Additional memory is required for SCP aggregation service if Metadata Enrichment feature is enabled and value of properties "METADATA_MAP_CACHE_EXPIRY_TIME_MS" and "METADATA_MAP_CACHE_SCHEDULER_TIME_MS" is increased to a higher value.
- End-to-end latency may increase based on "Timer Expiry Value + Processing Time + RF2/RF1 Processing Time + third-party response time (for HTTP2 Feed)."
- More instances of the Kafka broker might be required when running with RF=2, based on setup performance. End-to-end latency might also increase if DISK I/O is slow.
- For DISK I/O refer to [Disk Throughput Requirements](#)
- For Kafka PVC-Storage refer to [Kafka PVC Storage Requirements](#)

3.1.3.2.2.3 Aggregated 135K MPS Synthetic (TCP) Feed

When Weighted Load Balancing is ON/OFF and Filter is OFF

- **Replication Factor:** 1
- **Message Size:** 3500
- **Feed Type:** Synthetic (TCP)
- **FILTER:** OFF
- **WLB:** WLB is ON/OFF

15K NRF Profile

Table 3-34 15K NRF Profile

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|------------------------------------|------|----------------------|---------------|------------------|
| zookeeper | 1 | 1 | 3 | - |
| kafkaBroker | 2 | 24 | 3 | - |
| kafkaBroker (with replicated feed) | 2 | 24 | 3 | - |
| ocnaddnrffaggregation | 2 | 2 | 1 | NRF=6 |
| consumeradapter (Synthetic feed) | 3 | 3 | 2 | MAIN=12 |

90K SCP Profile**Table 3-35 90K SCP Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|------------------------------------|------|----------------------|---------------|-------------------------------------|
| zookeeper | 1 | 1 | 3 | - |
| kafkaBroker | 4 | 48 | 4 | - |
| kafkaBroker (with replicated feed) | 7 | 48 | 4 | - |
| ocnaddscppaggregation | 2 | 4 | 5 | SCP=30 (Each Instance 6 partitions) |
| consumeradapter (Synthetic feed) | 3 | 3 | 8 | MAIN=48 |

30K SEPP Profile**Table 3-36 30K SEPP Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|------------------------------------|------|----------------------|---------------|--------------------------------------|
| zookeeper | 1 | 1 | 3 | - |
| kafkaBroker | 3 | 18 | 3 | - |
| kafkaBroker (with replicated feed) | 6 | 24 | 3 | - |
| ocnaddseppaggregation | 2 | 4 | 2 | SEPP=12 (Each Instance 6 partitions) |
| consumeradapter (Synthetic feed) | 3 | 3 | 3 | MAIN=18 |

135K Profile (SCP: 90K, NRF: 15K, SEPP: 30K)

Table 3-37 135K Profile (SCP: 90K, NRF: 15K, SEPP: 30K)

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|------------------------------------|------|----------------------|---------------|--------------------------------------|
| zookeeper | 1 | 1 | 3 | - |
| kafkaBroker | 6 | 48 | 6 | - |
| kafkaBroker (with replicated feed) | 7.5 | 96 | 6 | - |
| ocnaddscpaggregation | - | - | - | SCP= 30 (Each Instance 6 partitions) |
| ocnaddnrffaggregation | - | - | - | NRF= 6 (Each Instance 6 partitions) |
| ocnaddseppaggregation | 2 | 4 | 2 | SEPP=12 (Each Instance 6 partitions) |
| consumeradapter (Synthetic feed) | 3 | 6 | 11 | MAIN=66 (Each Instance 6 partitions) |

135K SCP Profile**Table 3-38 135K SCP Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|------------------------------------|------|----------------------|---------------|--------------------------------------|
| zookeeper | 1 | 1 | 3 | - |
| kafkaBroker | 6 | 48 | 6 | - |
| kafkaBroker (with replicated feed) | 6.5 | 96 | 6 | - |
| ocnaddscpaggregation | 2 | 4 | 8 | SCP=48 (Each Instance 6 partitions) |
| consumeradapter (Synthetic feed) | 3 | 6 | 11 | MAIN=66 (Each Instance 6 partitions) |

When Weighted Load Balancing is ON/OFF, L3L4 Mapping is ON/OFF, and Filter is ON

- **Replication Factor:** 1
- **Message Size:** 3500
- **Feed Type:** SYNTHETIC
- **L3L4 Mapping:** ON/OFF
- **FILTER:** ON
- **WLB:** WLB is ON/OFF

15K NRF Profile

Table 3-39 15K NRF Profile

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|--|------|----------------------|---------------|-------------------------------------|
| ocnaddnrffaggregation (Ingress Filter is ON) | 2 | 2 | 2 | NRF=12 (Each Instance 6 partitions) |
| consumeradapter (Synthetic feed with Egress Filter ON) | 3 | 3 | 3 | MAIN=18 |

90K SCP Profile**Table 3-40 90K SCP Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|--|------|----------------------|---------------|-------------------------------------|
| ocnaddscppaggregation (Ingress Filter is ON) | 2 | 4 | 6 | SCP=36 (Each Instance 6 partitions) |
| consumeradapter (Synthetic feed with Egress Filter ON) | 3 | 3 | 9 | MAIN=54 |

30K SEPP Profile**Table 3-41 30K SEPP Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|--|------|----------------------|---------------|--------------------------------------|
| ocnaddseppaggregation (Ingress Filter is ON) | 2 | 4 | 3 | SEPP=18 (Each Instance 6 partitions) |
| consumeradapter (Synthetic feed with Egress Filter ON) | 3 | 3 | 3 | MAIN=18 |

135K Profile (SCP: 90K, NRF: 15K, SEPP: 30K)**Table 3-42 135K Profile (SCP: 90K, NRF: 15K, SEPP: 30K)**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|--|------|----------------------|---------------|-------------------------------------|
| ocnaddscppaggregation (Ingress Filter is ON) | 2 | 4 | 6 | SCP=36 (Each Instance 6 partitions) |
| ocnaddnrffaggregation (Ingress Filter is ON) | 2 | 2 | 2 | NRF=12 (Each Instance 6 partitions) |

Table 3-42 (Cont.) 135K Profile (SCP: 90K, NRF: 15K, SEPP: 30K)

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|--|------|----------------------|---------------|--------------------------------------|
| ocnaddseppaggregation (Ingress Filter is ON) | 2 | 4 | 3 | SEPP=18 (Each Instance 6 partitions) |
| consumeradapter (Synthetic feed with Egress Filter ON) | 3 | 6 | 11 | MAIN=66 (Each Instance 6 partitions) |

135K SCP Profile**Table 3-43 135K SCP Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|--|------|----------------------|---------------|--------------------------------------|
| ocnaddscpaggregation (Ingress Filter is ON) | 2 | 4 | 9 | SCP=54 (Each Instance 6 partitions) |
| consumeradapter (Synthetic feed with Egress Filter ON) | 3 | 6 | 11 | MAIN=66 (Each Instance 6 partitions) |

Note

- When advance OCNADD features like Ingress filtering, Egress filtering, L3-L4 and Weighted load balancing are enabled simultaneously, then resource requirement for "consumeradapter (Synthetic feed)" may vary at higher throughput.
- Resource requirement may vary when Filter is ON based on % data allowed after filtering and number of filter condition with values configured.
- Resource requirement may vary when L3L4 is ON and size of global I3I4 configuration is big.
- Five/Six instances of Kafka broker might require while running RF=2 based on setup performance and end-2-end latency might get increased when DISK I/O is slow,
- For DISK I/O refer to [Disk Throughput Requirements](#)
- For Kafka PVC-Storage refer to [Kafka PVC Storage Requirements](#)

3.1.3.2.2.4 SCP 270K MPS Synthetic (TCP) Feed**When Weighted Load Balancing is ON/OFF and Filter is OFF**

- **Replication Factor:** 1
- **Message Size:** 3500
- **FEED Type:** Synthetic (TCP)

- **FILTER:** OFF
- **WLB:** WLB is ON/OFF

Table 3-44 270K MPS SCP Profile

| Services | vCPU | Memory Required (Gi) | Total Replica | Topic Partition |
|--|------|----------------------|---------------|---|
| zookeeper | 1 | 1 | 3 | - |
| kafkaBroker | 5 | 48 | 11 | - |
| ocnaddscpaggregation | 2 | 4 | 11 | SCP=66 (Each instance 6 partition) |
| ocnaddscpaggregation MESSAGE SEQUENCING =ON DD METADATA = ON/OFF | 2 | 48 | 14 | SCP=84 (Each instance 6 partition) |
| consumeradapter (Synthetic feed) | 3 | 6 | 21 | MAIN=126 (Each instance 6 partition) |

Note

- Resource requirements may vary when L3L4 is ON, and the size of the global L3L4 configuration is large.
- The number of instances for SCP aggregation may increase from the defined number in the resource profile based on the message sequencing timer expiry configuration (using max timer expiry value) and transaction success rate.
- Additional memory is required for the SCP aggregation service if the Metadata Enrichment feature is enabled, and the values of properties "METADATA_MAP_CACHE_EXPIRY_TIME_MS" and "METADATA_MAP_CACHE_SCHEDULER_TIME_MS" are increased to a higher value.
- End-to-end latency may increase based on "Timer Expiry Value + Processing Time + RF2/RF1 Processing Time + third-party response time (for HTTP2 Feed)."
- More instances of the Kafka broker might be required when running with RF=2, based on setup performance. End-to-end latency might also increase if DISK I/O is slow.
- For DISK I/O refer to [Disk Throughput Requirements](#)
- For Kafka PVC-Storage refer to [Kafka PVC Storage Requirements](#)

3.1.3.2.2.5 BSF 9K MPS All Feed Types**When Weighted Load Balancing is ON/OFF and Filter is OFF**

- **Replication Factor: 1**

- **Message Size:** 3500
- **FEED Type:** ALL
- **FILTER:** OFF
- **WLB:** WLB is ON/OFF

Table 3-45 9K MPS BSF Profile

| Services | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|--|------|----------------------|---------------|--|
| zookeeper | 1 | 1 | 3 | - |
| kafkaBroker | 2 | 24 | 4 | - |
| ocnaddbsfaggregation | 2 | 2 | 1 | BSF=6 |
| ocnaddbsfaggregation MESSAGE SEQUENCING =ON DD METADATA = ON/OFF | 2 | 16 | 1 | BSF=6 |
| ocnaddconsumeradapter (Synthetic Feed) | 3 | 4 | 1 | MAIN=6 |
| ocnaddconsumeradapter (HTTP2 Feed) | 3 | 4 | 1 | MAIN=9 |
| FEED TYPE = CORRELATED_FILTERED (Minimum 20% data filter is configured) | | | | |
| ocnaddfilter | 2 | 3 | 1 | MAIN=6,<feed-name>-FILTERED=6 |
| ocnaddcorrelation | 3 | 48 | 1 | <feed-name>-FILTERED-CORRELATED=6 or as per consumer |

Note

- Resource requirements may vary for the filter service based on the % of data allowed after filtering and the number of filter conditions with values configured.
- Resource requirements for the correlation service may vary when all messages of a transaction are not received and the value of "maxTransactionWaitTime" is set to a higher value. (It is recommended to have a lower value in these scenarios.)
- Kafka broker resource requirements will increase in the case of $rf=2$ and/or if replicated feed is running. End-to-end latency might increase when DISK I/O is slow.
- The above resource requirements for the correlation service are mentioned for a single feed; in the case of a replicated feed, additional resources will be required in Kafka.
- Additional memory is required for the aggregation service if the Metadata Enrichment feature is enabled, and the values of properties "METADATA_MAP_CACHE_EXPIRY_TIME_MS" and "METADATA_MAP_CACHE_SCHEDULER_TIME_MS" are increased to a higher value.
- The end-to-end latency may increase based on "Timer Expiry Value + Processing Time + RF2/RF1 Processing Time + third-party response time (for HTTP2 Feed)."
- Filter service memory and CPU requirements may need to increase based on the number of CORRELATED_FILTERED feeds configured; the above requirement is given for a single configuration.
- For DISK I/O refer to [Disk Throughput Requirements](#)
- For Kafka PVC-Storage refer to [Kafka PVC Storage Requirements](#)
- It is mandatory to create CORRELATED/CORRELATED_FILTERED ACL feeds before making correlation configurations.
- Calculate the PVC size of the Kafka broker in advance for correlation configurations, as each new CORRELATED ACL feed type correlation configuration creates 1 new topic, and each new CORRELATED_FILTERED ACL feed type correlation configuration creates 2 new topics.
- CPU and Memory requirements in Kafka will increase based on the number of configurations of CORRELATED or CORRELATED_FILTERED. Resources are mentioned below for a maximum of 2 configurations.
- Resource requirements for the correlation service may vary when all messages of a transaction are not received and the value of "maxTransactionWaitTime" is set higher. (It is recommended to have a lower value in these scenarios.)

3.1.3.2.2.6 PCF 30K MPS All Feed Types

When Weighted Load Balancing is ON/OFF and Filter is OFF

- **Replication Factor:** 1
- **Message Size:** 3500
- **FEED Type:** ALL
- **FILTER:** OFF

- **WLB:** WLB is ON/OFF

Table 3-46 30K MPS PCF Profile

| Services | vCPU | Memory Required (Gi) | Total Replica | Topic Partition |
|--|------|----------------------|---------------|---|
| zookeeper | 1 | 1 | 3 | - |
| kafkaBroker | 3 | 24 | 4 | - |
| ocnaddpcfaggregation | 2 | 2 | 2 | PCF=12 |
| ocnaddpcfaggregation MESSAGE SEQUENCING =ON DD METADATA = ON/OFF | 2 | 24 | 2 | PCF=12 |
| ocnaddconsumeradapter (Synthetic Feed) | 3 | 4 | 3 | MAIN=18 |
| ocnaddconsumeradapter (HTTP2 Feed) | 3 | 4 | 3 | MAIN=27 |
| FEED TYPE = CORRELATED_FILTERED (Minimum 20% data filter is configured) | | | | |
| ocnaddfilter | 2 | 3 | 4 | MAIN=24, <feed-name>-FILTERED=24 |
| ocnaddcorrelation | 3 | 64 | 4 | <feed-name>-FILTERED-CORRELATED=24 or as per consumer |

Note

- Resource requirements may vary for the filter service based on the percentage of data allowed after filtering and the number of filter conditions with configured values.
- Resource requirements for the correlation service may vary when all messages of a transaction are not received and the value of "maxTransactionWaitTime" is set higher. (It is recommended to use a lower value in these scenarios.)
- Kafka broker resource requirements will increase in the case of $rf=2$ and/or if a replicated feed is running, and end-to-end latency might increase when DISK I/O is slow.
- The above resource requirements for the correlation service are mentioned for a single feed, and in the case of a replicated feed, additional resources will be required in Kafka.
- Additional memory is required for the aggregation service if the Metadata Enrichment feature is enabled and the values of properties "METADATA_MAP_CACHE_EXPIRY_TIME_MS" and "METADATA_MAP_CACHE_SCHEDULER_TIME_MS" are increased.
- End-to-end latency may increase based on "Timer Expiry Value + Processing Time + RF2/RF1 Processing Time + third-party response time (for HTTP2 Feed)."
- Filter service memory and CPU requirements may need to increase based on the number of CORRELATION_FILTERED feeds configured. The above requirements are given for a single configuration.
- For DISK I/O refer to [Disk Throughput Requirements](#)
- For Kafka PVC-Storage refer to [Kafka PVC Storage Requirements](#)
- It is mandatory to create CORRELATED/CORRELATED_FILTERED ACL feeds before making a correlation configuration.
- Calculate the PVC size of the Kafka broker in advance for correlation configurations, as each new CORRELATED ACL feed type correlation configuration creates 1 new topic, and each new CORRELATED_FILTERED ACL feed type correlation configuration creates 2 new topics.
- CPU and memory requirements in Kafka will increase based on the number of CORRELATED or CORRELATED_FILTERED configurations. Resources are mentioned below for a maximum of 2 configurations.
- Resource requirements for the correlation service may vary when all messages of a transaction are not received and the value of "maxTransactionWaitTime" is set higher. (It is recommended to use a lower value in these scenarios.)

3.1.3.2.2.7 Message Sequencing and Metadata Enrichment 135K MPS All Feed Types

- **Replication Factor:** 2
- **Message Size:** 3500
- **Feed Type:** HTTP2/TCP/KAFKA

Table 3-47 Resource Requirement

| Service | vCPU | Memory Required (Gi) | Topic Partition |
|---|------|----------------------|-----------------|
| ocnaddkafka (Kafka with RF=2) | 6 | 164 | 6- |
| MESSAGE_SEQUENCING_TYPE = TRANSACTION, TRANSACTION_MSG_SEQUENCING_EXPIRY_TIMER= 200ms and METADATA ENRICHMENT ON/OFF | | | |
| ocnaddscpaggregation | 2 | 24 | 530(SCP) |
| MESSAGE_SEQUENCING_TYPE = TIME_WINDOW, WINDOW_MSG_SEQUENCING_EXPIRY_TIMER=10ms | | | |
| ocnaddscpaggregation | 2 | 24 | 530(SCP) |
| MESSAGE_SEQUENCING_TYPE = REQUEST_RESPONSE, REQUEST_RESPONSE_MSG_SEQUENCING_EXPIRY_TIMER=10ms and METADATA ENRICHMENT ON/OFF | | | |
| ocnaddscpaggregation | 2 | 16 | 530(SCP) |
| INGRESS FILTER is ON | | | |
| MESSAGE_SEQUENCING_TYPE = TRANSACTION, TRANSACTION_MSG_SEQUENCING_EXPIRY_TIMER= 200ms and METADATA ENRICHMENT ON/OFF | | | |
| ocnaddscpaggregation | 2 | 36 | 536(SCP) |
| MESSAGE_SEQUENCING_TYPE = TIME_WINDOW, WINDOW_MSG_SEQUENCING_EXPIRY_TIMER=10ms | | | |
| ocnaddscpaggregation | 2 | 36 | 536(SCP) |
| MESSAGE_SEQUENCING_TYPE = REQUEST_RESPONSE, REQUEST_RESPONSE_MSG_SEQUENCING_EXPIRY_TIMER=10ms and METADATA ENRICHMENT ON/OFF | | | |
| ocnaddscpaggregation | 2 | 24 | 536(SCP) |
| HTTP2 Feed (FILTER = OFF) | | | |
| consumeradapter | 3 | 24 | 1135(MAIN) |
| SYNTHETIC Feed (TCP CONNECTION MESSAGE and/or MESSAGE SEGEMENTATION = ON) (FILTER=OFF) | | | |
| consumeradapter | 3 | 12 | 166(MAIN) |

Note

- Update value of parameter "numIoThreads" to 128 in custom-value.yaml file
- The performance run has been completed with 90% success rate of transactions (Success Transaction = All 4 message of Transaction ("RxRequest, TxRequest.RxResponse,TxResponse") are received from SCP NF)
- The number of instances for SCP aggregation may increase from defined number in resource profile based on message sequencing timer expiry configuration (using Max timer expiry value) and Transaction success rate.
- Additional memory is required for SCP aggregation service if Metadata Enrichment feature is enabled and value of properties "METADATA_MAP_CACHE_EXPIRY_TIME_MS" and "METADATA_MAP_CACHE_SCHEDULER_TIME_MS" is increased to a higher value.
- The end-2-end latency may increase based on "**Timer Expiry Value + Processing Time+ RF2 Processing Time+ 3rd party response time (For HTTP2 Feed)**"

3.1.3.2.2.8 Correlated 30K MPS Kafka Feed

Note

- Creating a CORRELATED or CORRELATED_FILTERED ACL feed is mandatory before making a correlation configuration.
- Calculate the PVC size of a Kafka broker in advance, as each new CORRELATED ACL feed type correlation configuration creates one new topic, and each new CORRELATED_FILTERED ACL feed type correlation configuration creates two new topics.
- The CPU and memory requirement in Kafka increase based on the number of CORRELATED or CORRELATED_FILTERED configurations; the resources mentioned in the below table are for a maximum of two configurations.
- Resource requirements for correlation service vary when all the transaction messages are not received and the value of *maxTransactionWaitTime* is set to higher value (it is recommended to have a lower value for this scenario).

- **Replication Factor: 1**
- **Message Size: 3500**
- **Feed Type: CORRELATED**

15K NRF Profile**Table 3-48 15K NRF Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|-----------|------|----------------------|---------------|------------------|
| zookeeper | 1 | 1 | 3 | - |

Table 3-48 (Cont.) 15K NRF Profile

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|--|------|----------------------|---------------|---|
| kafkaBroker | 3 | 24 | 4 | - |
| EXPORT/TRACE(1K MPS rate is supported for inbound OCNADD data) for 3 export configuration | | | | |
| ocnaddexport | 3 | 24 | 1 | EXPORT/TRACE (1K MPS rate supported for inbound OCNADD data) |
| kafkaBroker (with replicated feed) | 3 | 24 | 4 | - |
| ocnaddnrfaggregation | 2 | 2 | 1 | NRF=6 (Each Instance 6 partitions) |
| Feed TYPE = CORRELATED | | | | |
| ocnaddcorrelation | 3 | 64 | 3 | MAIN=18, -CORRELATED=18 or as per consumer |
| Feed TYPE = CORRELATED_FILTERED (Minimum 20% data filter is configured) | | | | |
| ocnaddfilter | 2 | 3 | 3 | MAIN=18, -FILTERED=18 |
| ocnaddcorrelation (Filtered) | 3 | 48 | 3 | -FILTERED-CORRELATED=18 or as per consumer |
| Per Correlation Feed(1K MPS supported with 24 hours retention) | | | | |
| storageadapter | 3 | 16 | 1 | Per Correlation Feed (1K MPS supported with 24 hours retention) |

30K SCP Profile

Table 3-49 30K SCP Profile

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|--|------|----------------------|---------------|--|
| zookeeper | 1 | 1 | 3 | - |
| kafkaBroker | 4 | 24 | 4 | - |
| EXPORT/TRACE(1K MPS rate is supported for inbound OCNADD data) for 3 export configuration | | | | |
| ocnaddexport | 3 | 24 | 1 | EXPORT/TRACE (1K MPS rate supported for inbound OCNADD data) |
| kafkaBroker (with replicated feed) | 5 | 32 | 4 | - |
| ocnaddscpaggregation | 2 | 2 | 2 | SCP=12 (Each Instance 6 partitions) |
| Feed TYPE = CORRELATED | | | | |

Table 3-49 (Cont.) 30K SCP Profile

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|--|------|----------------------|---------------|---|
| ocnaddcorrelation | 3 | 64 | 4 | MAIN=24, -CORRELATED=24 or as per consumer |
| Feed TYPE = CORRELATED_FILTERED (Minimum 20% data filter is configured) | | | | |
| ocnaddfilter | 2 | 3 | 4 | MAIN=24, -FILTERED=24 |
| ocnaddcorrelation (Filtered) | 3 | 64 | 4 | FILTERED-CORRELATED=24 or as per consumer |
| Per Correlation Feed(1K MPS supported with 24 hours retention) | | | | |
| storageadapter | 3 | 16 | 1 | Per Correlation Feed (1K MPS supported with 24 hours retention) |

30K SEPP Profile

Table 3-50 30K SEPP Profile

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|--|------|----------------------|---------------|---|
| zookeeper | 1 | 1 | 3 | - |
| kafkaBroker | 4 | 24 | 4 | - |
| EXPORT/TRACE(1K MPS rate is supported for inbound OCNADD data) for 3 export configuration | | | | |
| ocnaddexport | 3 | 24 | 1 | EXPORT/TRACE (1K MPS rate supported for inbound OCNADD data) |
| kafkaBroker (with replicated feed) | 5 | 32 | 4 | - |
| ocnaddseppaggregation | 2 | 2 | 2 | SEPP=12 (Each Instance 6 partitions) |
| Feed TYPE = CORRELATED | | | | |
| ocnaddcorrelation | 3 | 64 | 4 | MAIN=24, -CORRELATED=24 or as per consumer |
| Feed TYPE = CORRELATED_FILTERED (Minimum 20% data filter is configured) | | | | |
| ocnaddfilter | 2 | 3 | 4 | MAIN=24, FILTERED=24 |
| ocnaddcorrelation (Filtered) | 3 | 64 | 4 | FILTERED-CORRELATED=24 or as per consumer |
| Per Correlation Feed(1K MPS supported with 24 hours retention) | | | | |
| storageadapter | 3 | 16 | 1 | Per Correlation Feed (1K MPS supported with 24 hours retention) |

30K Profile (SCP: 15K, NRF: 5K, SEPP: 10K)**Table 3-51 30K Profile (SCP: 15K, NRF: 5K, SEPP: 10K)**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|--|------|----------------------|---------------|---|
| zookeeper | 1 | 1 | 3 | - |
| kafkaBroker | 4 | 24 | 4 | - |
| EXPORT/TRACE(1K MPS rate is supported for inbound OCNADD data) for 3 export configuration | | | | |
| ocnaddexport | 3 | 24 | 1 | EXPORT/TRACE (1K MPS rate supported for inbound OCNADD data) |
| kafkaBroker (with replicated feed) | 5 | 32 | 4 | - |
| ocnaddscppaggregation | 2 | 2 | 1 | SCP=6 (Each Instance 6 partitions) |
| ocnaddnrfaggregation | 2 | 2 | 1 | NRF=6 (Each Instance 6 partitions) |
| ocnaddseppaggregation | 2 | 2 | 1 | SEPP=6 (Each Instance 6 partitions) |
| Feed TYPE = CORRELATED | | | | |
| ocnaddcorrelation | 3 | 64 | 4 | MAIN=24, -CORRELATED=24 or as per consumer |
| Feed TYPE = CORRELATED_FILTERED (Minimum 20% data filter is configured) | | | | |
| ocnaddfilter | 2 | 3 | 4 | MAIN=24, FILTERED=24 |
| ocnaddcorrelation (Filtered) | 3 | 64 | 4 | FILTERED-CORRELATED=24 or as per consumer |
| Per Correlation Feed(1K MPS supported with 24 hours retention) | | | | |
| storageadapter | 3 | 16 | 1 | Per Correlation Feed (1K MPS supported with 24 hours retention) |

Note

- Resource requirement may vary for filter service based on % data allowed after filtering and number of filter condition with values configured.
- Resource requirement for correlation service may vary when all messages of transaction are not received and value of "maxTransactionWaitTime" is set to higher (It is recommended to have lower value for these scenario).
- Kafka broker resource requirement will increase in case of rf=2 and/or replicated feed is running and end-2-end latency might get increased when DISK I/O is slow,
- The above resource requirement of correlation service is mentioned for single feed and in case of replicated feed, Additional resource will be required in kafka.
- Filter service memory and cpu requirement may need to increase based on number of CORRLATION_FILTERED feed is/are configured. Above requirement is given for single configuration.
- For DISK I/O refer to [Disk Throughput Requirements](#)
- For Kafka PVC-Storage refer to [Kafka PVC Storage Requirements](#)

3.1.3.2.2.9 Aggregated 135K MPS Kafka Feed

- **Replication Factor:** 1
- **Message Size:** 3500
- **Feed Type:** KAFKA

15K NRF Profile**Table 3-52 15K NRF Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|--|------|----------------------|---------------|------------------------------------|
| zookeeper | 1 | 1 | 3 | - |
| kafkaBroker | 2 | 24 | 3 | - |
| kafkaBroker (with replicated feed) | 2 | 24 | 3 | - |
| ocnaddnrfaggregation (Ingress FILTER is OFF) | 2 | 2 | 1 | NRF=6 (Each Instance 6 partition) |
| ocnaddnrfaggregation (Ingress Filter is ON) | 2 | 2 | 2 | NRF=12 (Each Instance 6 partition) |

90K SCP Profile**Table 3-53 90K SCP Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|-------------|------|----------------------|---------------|------------------|
| zookeeper | 1 | 1 | 3 | - |
| kafkaBroker | 6 | 24 | 4 | - |

Table 3-53 (Cont.) 90K SCP Profile

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|---|------|----------------------|---------------|------------------------------------|
| kafkaBroker (with replicated feed) | 7 | 48 | 4 | - |
| ocnaddscppaggregation (Ingress FILTER is OFF) | 2 | 4 | 5 | SCP=30 (Each Instance 6 partition) |
| ocnaddscppaggregation (Ingress FILTER is OFF) | 2 | 4 | 6 | SCP=36 (Each Instance 6 partition) |

30K SEPP Profile**Table 3-54 30K SEPP Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|---|------|----------------------|---------------|-------------------------------------|
| zookeeper | 1 | 1 | 3 | - |
| kafkaBroker | 5 | 18 | 3 | - |
| kafkaBroker (with replicated feed) | 6 | 24 | 3 | - |
| ocnaddseppaggregation (Ingress FILTER is OFF) | 2 | 4 | 2 | SEPP=12 (Each Instance 6 partition) |
| ocnaddseppaggregation (Ingress Filter is ON) | 2 | 4 | 3 | SEPP=18 (Each Instance 6 partition) |

135K Profile (SCP:90K, NRF:15K, SEPP:30K)**Table 3-55 135K Profile (SCP:90K, NRF:15K, SEPP:30K)**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|---|------|----------------------|---------------|-------------------------------------|
| zookeeper | 1 | 1 | 3 | - |
| kafkaBroker | 6.5 | 48 | 6 | - |
| kafkaBroker (with replicated feed) | 7.5 | 96 | 6 | - |
| ocnaddscppaggregation (Ingress FILTER is OFF) | 2 | 4 | 5 | SCP=30 (Each Instance 6 partition) |
| ocnaddnrfaggregation (Ingress FILTER is OFF) | 2 | 2 | 1 | NRF=6 (Each Instance 6 partition) |
| ocnaddseppaggregation (Ingress FILTER is OFF) | 2 | 4 | 2 | SEPP=12 (Each Instance 6 partition) |
| ocnaddscppaggregation (Ingress Filter is ON) | 2 | 4 | 6 | SCP=36 (Each Instance 6 partition) |

Table 3-55 (Cont.) 135K Profile (SCP:90K, NRF:15K, SEPP:30K)

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|---|------|----------------------|---------------|-------------------------------------|
| ocnaddnrfagggregation (Ingress Filter is ON) | 2 | 2 | 2 | NRF=12 (Each Instance 6 partition) |
| ocnaddseppagggregation (Ingress Filter is ON) | 2 | 4 | 3 | SEPP=18 (Each Instance 6 partition) |

135K SCP Profile**Table 3-56 135K SCP Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|--|------|----------------------|---------------|------------------------------------|
| zookeeper | 1 | 1 | 3 | - |
| kafkaBroker | 6.5 | 48 | 6 | - |
| kafkaBroker (with replicated feed) | 7.5 | 96 | 6 | - |
| ocnaddscpaggregation (Ingress FILTER is OFF) | 2 | 4 | 8 | SCP=48 (Each Instance 6 partition) |
| ocnaddscpaggregation (Ingress Filter is ON) | 2 | 4 | 9 | SCP=54 (Each Instance 6 partition) |

Note

The number of partitions for MAIN topic can be configured similar to the partition count recommended for Synthetic Feed. However, the partition count may increase or decrease as per the design of consumer application.

3.1.3.2.2.10 SCP 270K MPS Kafka Feed**When Weighted Load Balancing is ON/OFF and Filter is OFF**

- **Replication Factor:** 1
- **Message Size :** 3500
- **FEED Type:** KAFKA
- **FILTER:** OFF
- **WLB:** WLB is ON/OFF

Table 3-57 270K MPS KAFKA FEED

| Services | vCPU | Memory Required (Gi) | Total Replica | Topic Partition |
|-----------|------|----------------------|---------------|-----------------|
| zookeeper | 1 | 1 | 3 | - |

Table 3-57 (Cont.) 270K MPS KAFKA FEED

| Services | vCPU | Memory Required (Gi) | Total Replica | Topic Partition |
|--|------|----------------------|---------------|---------------------------------------|
| kafkaBroker | 5 | 48 | 11 | - |
| ocnaddscpaggregation | 2 | 4 | 11 | SCP=66 (Each instance 6 partition) |
| ocnaddscpaggregation MESSAGE SEQUENCING =ON DD METADATA = ON/OFF | 2 | 48 | 14 | SCP=84 (Each instance 6 partition) |

Note

- The number of instance for SCP aggregation may increase from defined number in resource profile based on message sequencing timer expiry configuration (using Max timer expiry value) and Transaction success rate.
- Additional memory is required for SCP aggregation service if Metadata Enrichment feature is enabled and value of properties "METADATA_MAP_CACHE_EXPIRY_TIME_MS" and "METADATA_MAP_CACHE_SCHEDULER_TIME_MS" is increased to a higher value.
- End-to-end latency may increase based on "Timer Expiry Value + Processing Time+ RF2/RF1 Processing Time
- More instances of the Kafka broker might be required when running with RF=2, based on setup performance. End-to-end latency might also increase if DISK I/O is slow.
- For DISK I/O refer to [Disk Throughput Requirements](#)
- For Kafka PVC-Storage refer to [Kafka PVC Storage Requirements](#)

3.1.3.2.2.11 5K MPS Non-Oracle Network Function Feed

- **Replication Factor:** 1
- **Message Size:** 3500
- **Feed Type:** Non-Oracle Network Function Feed

Table 3-58 Resource Requirement

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partitions |
|----------------------|------|----------------------|---------------|------------------|
| ocnaddingressadapter | 3 | 8 | 1 | - |

Table 3-58 (Cont.) Resource Requirement

| Service | vCPU | Memory Required (Gi) | Total Replicas | Topic Partitions |
|------------------------------------|------|----------------------|----------------|------------------|
| zookeeper | 1 | 1 | 3 | - |
| ocnaddnonoracleaggregation | 2 | 2 | 1 | NON_ORACLE=6 |
| kafkaBroker | 2 | 16 | 3 | - |
| consumeradapter | 3 | 6 | 1 | MAIN=9 |
| kafkaBroker (with replicated feed) | 2 | 24 | 3 | - |
| consumeradapter | 3 | 6 | 2 | MAIN=18 |

3.1.3.2.2.12 Resource Profile for Default Deployment

This profile can stream NFs (SCP, NRF, SEPP) data up to 15K MPS and can be scaled to handle up to 100K MPS for HTTP2 feed when *weighted_lb* and Filter (Ingress and Egress) are "OFF".

Replication Factor should be "1" and the incoming message size on OCNADD should be less than or equal to 3500K.

- **Replication Factor:** 1
- **Message Size:** 3500
- **Feed Type:** HTTP2, SYNTHETIC

Replication Factor should be 1 and the incoming message size on OCNADD should be less than or equal to 3500K.

Table 3-59 Default Deployment Profile

| Services | vCPU Req | vCPU Limit | Memory Req (Gi) | Memory Limit (Gi) | Min Replica | Max Replica | Partitions | Topic Name |
|-----------------------------|----------|------------|-----------------|-------------------|-------------|-------------|------------|------------|
| ocnaddconfiguration | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddalarm | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddadmin | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddhealthmonitoring | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddscppaggregation (55K) | 2 | 2 | 4 | 4 | 1 | 4 | 24 | SCP |
| ocnaddnrfaggregation (15K) | 2 | 2 | 2 | 2 | 1 | 1 | 6 | NRF |

Table 3-59 (Cont.) Default Deployment Profile

| Services | vCPU Req | vCPU Limit | Memory Req (Gi) | Memory Limit (Gi) | Min Replica | Max Replica | Partitions | Topic Name |
|----------------------------|----------|------------|-----------------|-------------------|--------------------------|---------------------------|------------|------------|
| ocnaddseppaggregation(30K) | 2 | 2 | 4 | 4 | 1 | 2 | 12 | SEPP |
| ocnaddbsfaggregation(9K) | 2 | 2 | 4 | 4 | 1 | 1 | 6 | BSF |
| ocnaddpcfaggregation(30K) | 2 | 2 | 4 | 4 | 1 | 2 | 12 | PCF |
| consumeradapter | 3 | 3 | 6 | 6 | HTTP2: 2 SYNTHETIC: 1 | HTTP2: 13 SYNTHETIC: 9 | 117 | MAIN |
| kafkaBroker | 6 | 6 | 48 | 48 | 4 | 4 | - | - |
| zookeeper | 1 | 1 | 1 | 2 | 3 | 3 | - | - |
| ocnaddgui | 1 | 2 | 1 | 1 | 1 | 1 | - | - |
| ocnaddrouter | 1 | 2 | 1 | 1 | 1 | 1 | - | - |

Note

- Four instances of Kafka brokers might be required when running Replication Factor $r_f=2$, based on the setup performance. The end-to-end latency might increase when DISK I/O is slow.
- For DISK I/O, see [Disk Throughput Requirements](#).
- For Kafka PVC-Storage, see [Kafka PVC Storage Requirements](#).

3.1.3.3 Resource Profile for OCI Environment

This section displays the profile resource requirements in OCI environment.

3.1.3.3.1 Profile Resource Requirements for HTTP2 Feed for 5K MPS in OCI Environment

The following table displays the profile resource requirements for HTTP2 feed in OCI environment.

Note

- This test is performed without enabling the Ingress or Egress features.
- The replicated HTTP2 feed's end-to-end latency is between 2ms to 8ms.
- The single HTTP2 feed's end-to-end latency is between 1ms to 3ms.

- **Replication Factor = 1**
- **Message Size = 3500**
- **Feed Type: HTTP2**

5K Profile (SCP:3K NRF:1K SEPP:1K)**Table 3-60 5K Profile (SCP:3K NRF:1K SEPP:1K)**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partition |
|---|------|----------------------|---------------|--|
| ocnaddconfiguration | 1 | 1 | 1 | - |
| ocnaddalarm | 1 | 1 | 1 | - |
| ocnaddadmin | 1 | 1 | 1 | - |
| ocnaddhealthmonitoring | 1 | 1 | 1 | - |
| ocnaddgui | 2 | 1 | 1 | - |
| ocnadduirouter | 2 | 1 | 1 | - |
| zookeeper | 1 | 1 | 3 | - |
| ocnaddkafka | 2 | 24 | 4 | - |
| Replicated Feed (Avg Latency: 1ms) | | | | |
| ocnaddkafka | 3 | 32 | 4 | - |
| Single Feed (Avg Latency: 1ms) | | | | |
| ocnaddscppaggregation | 2 | 2 | 1 | SCP=6 (Each Instance 6 partition) |
| ocnaddnrffaggregation | 2 | 2 | 1 | NRF=6 (Each Instance 6 partition) |
| ocnaddseppaggregation | 2 | 2 | 1 | SEPP=12 (Each Instance 6 partition) |
| ocnaddadapter | 3 | 3 | 2 | MAIN=18 (Each instance 9 partition) |

5K SCP Profile

Table 3-61 5K SCP Profile

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partition |
|---|------|----------------------|---------------|--|
| ocnaddconfiguration | 1 | 1 | 1 | - |
| ocnaddalarm | 1 | 1 | 1 | - |
| ocnaddadmin | 1 | 1 | 1 | - |
| ocnaddhealthmonitoring | 1 | 1 | 1 | - |
| ocnaddgui | 2 | 1 | 1 | - |
| ocnadduirouter | 2 | 1 | 1 | - |
| zookeeper | 1 | 1 | 3 | - |
| ocnaddkafka | 2 | 24 | 4 | - |
| Replicated Feed (Avg Latency: 1ms) | | | | |
| ocnaddkafka | 3 | 32 | | - |
| Single Feed (Avg Latency: 1ms) | | | | |
| ocnaddscppaggregation | 2 | 2 | 2 | SCP=12 (Each instance 6 partition) |
| ocnaddnrffaggregation | - | - | - | - |
| ocnaddseppaggregation | - | - | - | - |
| ocnaddadapter | 3 | 3 | 2 | MAIN=18 (Each instance 9 partition) |

3.1.3.3.2 Profile Resource Requirements for Aggregated Kafka Feed for 5K MPS in OCI Environment

The following table displays the profile resource requirements for Aggregated feed in OCI environment.

Note

- This test is performed without enabling the Ingress or Egress features.

- Replication Factor:** 1
- Message Size:** 3500
- Feed Type:** AGGREGATED KAFKA

5K Profile (SCP:3K NRF:1K SEPP:1K)

Table 3-62 5K Profile (SCP:3K NRF:1K SEPP:1K)

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partition |
|------------------------|------|----------------------|---------------|--|
| ocnaddconfiguration | 1 | 1 | 1 | - |
| ocnaddalarm | 1 | 1 | 1 | - |
| ocnaddadmin | 1 | 1 | 1 | - |
| ocnaddhealthmonitoring | 1 | 1 | 1 | - |
| ocnaddgui | 2 | 1 | 1 | - |
| ocnadduirouter | 2 | 1 | 1 | - |
| zookeeper | 1 | 1 | 3 | - |
| ocnaddkafka | 2 | 24 | 4 | - |
| Replicated Feed | | | | |
| ocnaddkafka | 3 | 32 | | - |
| Single Feed | | | | |
| ocnaddscppaggregation | 2 | 2 | 1 | SCP=6 (Each Instance 6 partition) |
| ocnaddnrfaggregation | 2 | 2 | 1 | NRF=6 (Each Instance 6 partition) |
| ocnaddseppaggregation | 2 | 2 | 1 | SEPP=12 (Each Instance 6 partition) |

5K SCP Profile

Table 3-63 5K SCP Profile

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partition |
|------------------------|------|----------------------|---------------|-----------------|
| ocnaddconfiguration | 1 | 1 | 1 | - |
| ocnaddalarm | 1 | 1 | 1 | - |
| ocnaddadmin | 1 | 1 | 1 | - |
| ocnaddhealthmonitoring | 1 | 1 | 1 | - |
| ocnaddgui | 2 | 1 | 1 | - |
| ocnadduirouter | 2 | 1 | 1 | - |
| zookeeper | 1 | 1 | 3 | - |
| ocnaddkafka | 2 | 24 | 4 | - |
| Replicated Feed | | | | |
| ocnaddkafka | 3 | 32 | | - |

Table 3-63 (Cont.) 5K SCP Profile

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partition |
|-----------------------|------|----------------------|---------------|---------------------------------------|
| Single Feed | | | | |
| ocnaddscpaggregation | 2 | 2 | 2 | SCP=12 (Each instance 6 partition) |
| ocnaddnrfaggregation | - | - | - | - |
| ocnaddseppaggregation | - | - | - | - |

3.1.3.3.3 Profile Resource Requirements for Synthetic Feed for 5K MPS in OCI Environment

The following table displays the profile resource requirements for Synthetic feed in OCI environment.

① Note

- This test is performed without enabling the Ingress or Egress features.
- The replicated TCP feed's end-to-end average latency is 3ms. The Block Volume Performance is 50% Balanced and 50% High Performance.
- The single TCP feed's end-to-end average latency is 3ms. The Block Volume Performance is "Balanced".

- **Replication Factor:** 1
- **Message Size** = 3500
- **Feed Type:** TCP

5K Profile (SCP:3K NRF:1K SEPP:1K)

Table 3-64 5K Profile (SCP:3K NRF:1K SEPP:1K)

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partition |
|------------------------|------|----------------------|---------------|-----------------|
| ocnaddconfiguration | 1 | 1 | 1 | - |
| ocnaddalarm | 1 | 1 | 1 | - |
| ocnaddadmin | 1 | 1 | 1 | - |
| ocnaddhealthmonitoring | 1 | 1 | 1 | - |
| ocnaddgui | 2 | 1 | 1 | - |
| ocnadduirouter | 2 | 1 | 1 | - |
| zookeeper | 1 | 1 | 3 | - |

Table 3-64 (Cont.) 5K Profile (SCP:3K NRF:1K SEPP:1K)

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partition |
|---|------|----------------------|---------------|--|
| ocnaddkafka | 3 | 24 | 4 | - |
| Replicated Feed (Avg Latency: 0.3ms) | | | | |
| ocnaddkafka | 4 | 32 | 4 | - |
| Single Feed (Avg Latency: 0.3ms) | | | | |
| ocnaddscpaggregation | 2 | 2 | 1 | SCP=6 (Each Instance 6 partition) |
| ocnaddnrfaggregation | 2 | 2 | 1 | NRF=6 (Each Instance 6 partition) |
| ocnaddseppaggregation | 2 | 2 | 1 | SEPP=12 (Each Instance 6 partition) |
| ocnaddadapter | 3 | 3 | 2 | MAIN=12 (Each instance 6 partition) |

5K SCP Profile

Table 3-65 5K SCP Profile

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partition |
|---|------|----------------------|---------------|---------------------------------------|
| ocnaddconfiguration | 1 | 1 | 1 | - |
| ocnaddalarm | 1 | 1 | 1 | - |
| ocnaddadmin | 1 | 1 | 1 | - |
| ocnaddhealthmonitoring | 1 | 1 | 1 | - |
| ocnaddgui | 2 | 1 | 1 | - |
| ocnadduirouter | 2 | 1 | 1 | - |
| zookeeper | 1 | 1 | 3 | - |
| ocnaddkafka | 3 | 24 | 4 | - |
| Replicated Feed (Avg Latency: 0.3ms) | | | | |
| ocnaddkafka | 4 | 32 | 4 | - |
| Single Feed (Avg Latency: 0.3ms) | | | | |
| ocnaddscpaggregation | 2 | 2 | 2 | SCP=12 (Each instance 6 partition) |
| ocnaddnrfaggregation | - | - | - | - |
| ocnaddseppaggregation | - | - | - | - |

Table 3-65 (Cont.) 5K SCP Profile

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partition |
|---------------|------|----------------------|---------------|--|
| ocnaddadapter | 3 | 3 | 2 | MAIN=12 (Each instance 6 partition) |

3.1.3.3.4 Profile Resource Requirements for Correlated Kafka Feed for 5K MPS in OCI Environment

The following table displays the profile resource requirements for Correlated Kafka feed in OCI environment.

- **Replication Factor:** 1
- **Message Size:** 3500
- **ACL Feed Type:** CORRELATED

5K Profile (SCP:3K NRF:1K SEPP:1K)

Table 3-66 5K Profile (SCP:3K NRF:1K SEPP:1K)

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partition |
|--|------|----------------------|---------------|---|
| ocnaddconfiguration | 1 | 1 | 1 | - |
| ocnaddalarm | 1 | 1 | 1 | - |
| ocnaddadmin | 1 | 1 | 1 | - |
| ocnaddhealthmonitoring | 1 | 1 | 1 | - |
| ocnaddgui | 2 | 1 | 1 | - |
| ocnadduirouter | 2 | 1 | 1 | - |
| zookeeper | 1 | 2 | 3 | - |
| ocnaddkafka | 3 | 32 | 4 | - |
| Feed TYPE = CORRELATED | | | | |
| ocnaddscppaggregation | 2 | 2 | 2 | SCP=12 (Each instance 6 partition) |
| ocnaddnrffaggregation | - | - | - | - |
| ocnaddseppaggregation | - | - | - | - |
| ocnaddcorrelation | 3 | 24 | 3 | MAIN=18,<feed-name>- CORRELATED=18 or as per consumer |
| Feed TYPE = CORRELATED_FILTERED (Minimum 20% data filter is configured) | | | | |

Table 3-66 (Cont.) 5K Profile (SCP:3K NRF:1K SEPP:1K)

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partition |
|-------------------|------|----------------------|---------------|---|
| ocnaddfilter | 2 | 3 | 3 | MAIN=18,<feed-name>-FILTERED=18 |
| ocnaddcorrelation | 2 | 16 | 3 | <feed-name>-FILTERED-CORRELATED=18 or as per consumer |

5K SCP Profile**Table 3-67 5K SCP Profile**

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partition |
|--|------|----------------------|---------------|--|
| ocnaddconfiguration | 1 | 1 | 1 | - |
| ocnaddalarm | 1 | 1 | 1 | - |
| ocnaddadmin | 1 | 1 | 1 | - |
| ocnaddhealthmonitoring | 1 | 1 | 1 | - |
| ocnaddgui | 2 | 1 | 1 | - |
| ocnadduirouter | 2 | 1 | 1 | - |
| zookeeper | 1 | 1 | 3 | - |
| ocnaddkafka | 3 | 32 | 4 | - |
| Feed TYPE = CORRELATED | | | | |
| ocnaddscppaggregation | 2 | 2 | 1 | SCP=6 (Each Instance 6 partition) |
| ocnaddnrfaggregation | 2 | 2 | 1 | NRF=6 (Each Instance 6 partition) |
| ocnaddseppaggregation | 2 | 2 | 1 | SEPP=12 (Each Instance 6 partition) |
| ocnaddcorrelation | 3 | 24 | 3 | MAIN=18,<feed-name>-CORRELATED=18 or as per consumer |
| Feed TYPE = CORRELATED_FILTERED (Minimum 20% data filter is configured) | | | | |
| ocnaddfilter | 2 | 3 | 3 | MAIN=18,<feed-name>-FILTERED=18 |

Table 3-67 (Cont.) 5K SCP Profile

| Service | vCPU | Memory Required (Gi) | Total Replica | Topic Partition |
|-------------------|------|----------------------|---------------|---|
| ocnaddcorrelation | 2 | 16 | 3 | <feed-name>-FILTERED-CORRELATED=18 or as per consumer |

① Note

- The filter service's resource requirements may vary based on the percentage of data allowed post-filtering and the number of filter conditions with configured values.
- The correlation service's resource requirements may vary when all transaction messages are not received and the value of "maxTransactionWaitTime" is set to a higher value (Use a lower value for such scenarios).
- The Kafka broker's resource requirement increases if the Replication Factor is "2" and (or) the Replicated Feed is running, and the end-to-end latency increases when DISK I/O is slow.
- The resource requirement in the above table is for a single feed. Additional Kafka resources are required for replicated feeds.
- Depending on the number of CORRLATION_FILTERED feeds configured, you might have to increase the filter service memory and CPU requirements. The requirements mentioned in the above table are for a single configuration.

3.2 Pod Affinity (or Anti-affinity) Rules

In the Data Director, support for node affinity has been added. The rules are currently defined for the services mentioned in the table below. The rules are currently disabled; however, the user can enable them for the supported services. The rules are provided to control the deployment of certain traffic processing services on a particular set of identified nodes.

Services name:

- Consumer Adapter
- Kafka
- ocnaddnrffaggregation
- ocnaddscpaggregation
- ocnaddseppaggregation
- ocnaddnonoracleaggregation
- ocnaddbsfaggregation
- ocnaddpcfaggregation

Node Affinity Rules

1. Step1: Update the "affinity" section in the ocnadd-custom-values.yaml file

```

affinity: {}
    # Node Affinity Configuration:
    #
    # To enable node affinity, remove the empty curly braces
    # ({{}}) above and un-comment the nodeAffinity section below.
    # This allows you to specify rules for scheduling pods on
    # specific nodes.
    #
    # Example Configuration:
    #####
    # nodeAffinity:
    #   requiredDuringSchedulingIgnoredDuringExecution:
    #     nodeSelectorTerms:
    #       - matchExpressions:
    #         - key: kubernetes.io/hostname
    #           operator: NotIn
    #           values:
    #             - k8s-node-26
    #             - k8s-node-24
    #         - key: kubernetes.io/hostname
    #           operator: In
    #           values:
    #             - k8s-node-2
    #             - k8s-node-3
    #####
    # Explanation:
    #
    # - The 'NotIn' expression prevents pods from being
    #   scheduled on nodes k8s-node-26 and k8s-node-24.
    # - The 'In' expression ensures pods are scheduled on
    #   nodes k8s-node-2 and k8s-node-3.
    #
    # To customize, modify the 'key', 'operator', and 'values'
    # fields according to your needs.
    # You can add or remove 'matchExpressions' to create more
    # complex scheduling rules.
    #
    # Remember to remove the empty 'affinity: {}' and un-
    # comment the desired nodeAffinity configuration to enable it.

```

2. Helm upgrade the corresponding worker group or the default group

```

helm upgrade <source-release-name> -f ocnadd-custom-values-<worker-
group>.yaml --namespace <source-release-namespace> <target-release-helm-
chart>

```

Where,

- <source-release-name> is the release name of the source release deployment.
- ocnadd-custom-values-<worker-group>.yaml is the custom values file created for default-worker-group or the Worker Group in separate namespace.

- <source-release-namespace> is the OCNADD namespace of the source release.
- <target-release-helm-chart> is the location of the Helm chart of the target release.

For example:

```
helm upgrade ocnadd -f ocnadd-custom-values-wg.yaml --namespace ocnadd-
deploy ocnadd_wg
```

3. Verify that PODs of the modified services have been deployed as per the configured affinity rules.

3.3 Ephemeral Storage Requirements

The following table describes the Ephemeral Storage requirements for OCNADD:

Table:Ephemeral Storage

Table 3-68 Ephemeral Storage Requirements

| Service Name | Ephemeral Storage (Request) in Mi | Ephemeral Storage (Limit) in Mi | Description |
|--------------------------------------|-----------------------------------|---------------------------------|--|
| OAM Services | | | |
| ocnaddadminservice | 200 | 200 | - |
| ocnaddalarm | 100 | 500 | - |
| ocnaddhealthmonitoring | 100 | 500 | - |
| ocnaddconfiguration | 100 | 500 | - |
| ocnadduirouter | 500 | 500 | - |
| ocnaddexport | 1000 | 2000 | - |
| ocnaddredundancyagent | 100 | 500 | Required only when Geo Redundancy is enabled for OCNADD |
| Worker Group Services | | | |
| <app-name>-adapter (consumeradapter) | 1000 | 1000 | - |
| ocnaddscppaggregation | 100 | 500 | - |
| ocnaddseppaggregation | 100 | 500 | - |
| ocnaddnrffaggregation | 100 | 500 | - |
| ocnaddbsffaggregation | 100 | 500 | - |
| ocnaddpcffaggregation | 100 | 500 | - |
| ocnaddnonoracleaggregation | 100 | 500 | Required only when Data processing is enabled from Non-oracle NFs |
| ocnaddcorrelation | 400 | 800 | - |
| ocnaddstorageadapter | 400 | 800 | - |
| ocnaddingressadapter | 400 | 800 | - |
| ocnaddfilter | 100 | 800 | Required only when "Filtered" or "Correlated Filtered" feed is created |

3.4 Disk Throughput Requirements

The following table describes the disk throughput requirements in OCNADD:

Table 3-69 Disk Throughput Requirements

| Avg Size (in Bytes) | Rate | RF (Kafka Replication Factor) | Topic (NF+M AIN) | Consumer Feed | Total Write Throughput (MB/s) | Total Read Throughput (MB/s) | No. of Broker | Per Broker Write Throughput (MB/s) | Per Broker Read Throughput (MB/s) | Total per Broker Throughput (MB/s) with 10% buffer | Total Disk Throughput (MB/s) for the Cluster with 10% Buffer |
|---------------------|-------|-------------------------------|------------------|---------------|-------------------------------|------------------------------|---------------|------------------------------------|-----------------------------------|--|--|
| 1941 | 39000 | 1 | 2 | 1 | 145 | 145 | 3 | 54 | 54 | 108 | 324 |
| 1941 | 39000 | 2 | 2 | 1 | 289 | 289 | 3 | 106 | 106 | 212 | 636 |
| 3769 | 39000 | 1 | 2 | 1 | 281 | 281 | 3 | 104 | 104 | 208 | 624 |
| 3769 | 39000 | 2 | 2 | 1 | 561 | 561 | 3 | 206 | 206 | 412 | 1236 |

Note

- The average size of OCNADD Ingress message captured in the table includes the size of metadata list + header list of original 5G HTTP2 header frame + 5G-SBI-Message.
- Currently, it is recommended to set the Replication Factor (RF) value to **1** with the assumption that the underlying storage provides data redundancy. RF value of "2" will be supported in a future release.

The disk throughput calculations are as follows:

```
Writes: W * RF * T
Reads: ((RF*T)+C- 1) * W
Disk Throughput (Write + Read): (W * RF *T) + (L * W)
W -> MB/sec of data that will be written
RF -> Replication factor
T -> No of topics to which data copied. As of now, each message will be
copied into two topics.
C -> Number of consumer groups, that is the number of readers for each
write
L -> (RF*T) + C -1
```

Average Message in Table:

```
Average Message Size= (a1b1+a2b2+...+a(n)b(n))/(a1+a2+...+a(n))
a1 -> SCP MPS
b1 -> SCP message size
a2 -> NRF MPS
```

b2 -> NRF message size
 a(n) -> NF(n) MPS
 b(n) -> NF(n) message size

Example:

Average message size for row 1 = $((1624*30000)+(3000*9000))/(30000+9000) = 1941$ Bytes (approx)

Average message size for row 4 = $((4000*30000)+(3000*9000))/(30000+9000) = 3769$ Bytes (approx)

The following table describes the disk throughput for SCP and NRF:

Table 3-70 SCP, NRF, and SEPP Disk Throughput

| SCP Message | | NRF Message | | SEPP Message | | RF (Kafka Replication Factor) | Topic (NF+MAIN) | Consumer Feed | Total Write Throughput (MB/s) | Total Read Throughput (MB/s) | No.of Broker | Per Broker Write Throughput (MB/s) | Per Broker Read Throughput (MB/s) | Total per Broker Throughput (MB/s) with 10% buffer | Total Disk Throughput (MB/s) for Cluster with 10% Buffer | Rate |
|------------------|-------|------------------|------|------------------|-------|-------------------------------|-----------------|---------------|-------------------------------|------------------------------|--------------|------------------------------------|-----------------------------------|--|--|------|
| Avg Size (Bytes) | Rate | Avg Size (Bytes) | Rate | Avg Size (Bytes) | | | | | | | | | | | | |
| 1624 | 30000 | 3000 | 9000 | 3000 | 15000 | 1 | 2 | 1 | 145 | 145 | 145 | 3 | 54 | 54 | 108 | 324 |
| 1624 | 30000 | 3000 | 9000 | 3000 | 15000 | 2 | 2 | 1 | 289 | 289 | 289 | 3 | 106 | 106 | 212 | 636 |
| 4000 | 30000 | 3000 | 9000 | 3000 | 15000 | 1 | 2 | 1 | 281 | 281 | 281 | 3 | 104 | 104 | 208 | 624 |
| 4000 | 30000 | 3000 | 9000 | 3000 | 15000 | 2 | 2 | 1 | 561 | 561 | 561 | 3 | 206 | 206 | 412 | 1236 |

Note

- The average size of OCNADD Ingress message captured in the table includes the size of metadata list + header list of original 5G HTTP2 header frame + 5G-SBI-Message.
- Currently, it is recommended to set the Replication Factor (RF) value to **1** with the assumption that the underlying storage provides data redundancy.

3.5 Kafka PVC Storage Requirements

The following table describes the retention period per topic for different NFs:

Table 3-71 Retention Period Per Topic

| Topic Name | Retention Period |
|------------|------------------|
| SCP | 5 Minutes |
| NRF | 5 Minutes |

Table 3-71 (Cont.) Retention Period Per Topic

| Topic Name | Retention Period |
|------------|------------------|
| SEPP | 5 Minutes |
| BSF | 5 Minutes |
| PCF | 5 Minutes |
| MAIN | 6 Hours (Max) |

The following calculation is for storage requirements for a topic:

! Important

For the 6 hrs storage in the MAIN topic, the storage requirement must be calculated using the following information:

Storage Requirement for a topic = MPS * Retention Period * RF * Average Message Size

Where,

MPS is "Message Per Second"

RF is "Replication Factor"

Examples:

1. Average Message Size = 1941 Bytes

The following example uses the values from the first row of the [Table 3-70](#) table. For more information about the table, see [Disk Throughput Requirements](#):

Storage Requirement for SCP and NRF Topics = MPS * Retention Period * RF * Message Size = 39000 * 5 Minutes * 3 * 1941

= 39000 * 5 * 60 * 3 * 1941

= ~ 63.45 GB

Storage Requirement for MAIN = MPS * Retention Period * RF * Message Size = 39000 * 6 Hours * 3 * 1941

= 39000 * 6 * 60 * 60 * 3 * 1941

= ~ 4.46 TB

Total Storage Requirement for the Broker Cluster = Storage for SCP + Storage for NRF + Storage for MAIN

= 63.45 GB + 4.46 TB

= ~ 4.53 TB

Total Storage for each broker = (4.53/Number of Brokers) TB = (4.53/3) TB = ~ 1.51 TB [Assuming 3 Broker cluster]

2. Average Message Size = 3769 Bytes

The following example uses the values from the fourth row of the [Table 3-70](#) table. For more information about the table, see [Disk Throughput Requirements](#):

Storage Requirement for SCP and NRF Topics = MPS * Retention Period * RF * Message Size = 39000 * 5 Minutes * 3 * 3769

$$= 39000 * 5 * 60 * 3 * 3769$$

$$= \sim 123.20 \text{ GB}$$

Storage Requirement for MAIN = MPS * Retention Period * RF * Message Size = 39000 * 6 Hours * 3 * 3769

$$= 39000 * 6 * 60 * 60 * 3 * 3769$$

$$= \sim 8.66 \text{ TB}$$

Total Storage Requirement for the Broker Cluster = Storage for SCP + Storage for NRF + Storage for MAIN

$$= 123.20 \text{ GB} + 8.66 \text{ TB}$$

$$= \sim 8.79 \text{ TB}$$

Total Storage for each broker = (8.79/Number of Brokers) TB = (8.79/3) TB = ~ 2.93 TB [Assuming 3 Broker cluster]

4

OCNADD Benchmarking Testing

This section describes the performance testing scenarios and results for the Message Feed functionality provided by Oracle Communications Network Analytics Data Director (OCNADD). The message feed feature is tested with SCP, NRF, SEPP, BSF, and PCF as the source of the message feed.

4.1 vCNE Cluster Environment

This section gives the details of the performance tests done in LBVM vCNE Cluster Environment.

4.1.1 Performance Benchmarking for 360K MPS SCP and 450K Egress Traffic with TCP and HTTP2 Feed

This performance benchmarking evaluates the deployment of OCNADD handling an SCP traffic of 360K MPS and Egress traffic of 450K MPS. The benchmark utilizes 3 TCP feeds and 1 HTTP2 feed:

The benchmarking results are provided below:

Note

One Ingress message from a NF is "1" MPS for OCNADD.

Benchmark Test Environment

Execution Details

- **Execution Time:** 12+ Hours

Call Rate

- **Total Traffic:** 360K MPS

Call Mix

- **Model:** SCP Model-C

Setup Details

- **Environment:** OCCNE 24.3.1
- **LB Type:** vCNE LBVM
- **OCNADD Version:** 25.1.200
- **cnDBTier:** 24.3.0
- **NF Version:** 25.1.100
- **Third-Party Application:** One endpoint configured

Configuration Details

- **SCP:** Worker `messageCopy` enabled
- **SASL/SSL:** Enabled between SCP and OCNADD
- **OCNADD Replication Factor:** 1
- **OCNADD Data Feed:** HTTP2
- **OCNADD Kafka PVC:** 400 Gi
- **Average Message Size:** 3564 Bytes

Benchmark Testcase Specifications

The testcase parameters are as follows:

- **OCNADD**
 - A feed is configured using the OCNADD Console with SCP.
 - Message Ingestion Rate: 360K MPS

Resource Specifications:

Table 4-1 Resource Specifications

| Services | Min CPU Per Pod | Max CPU Per Pod | Min Memory Per Pod (Gi) | Max Memory Per Pod (Gi) | Min Replicas | Max Replicas | Partitions/Retention | Topics |
|------------------------|-----------------|-----------------|-------------------------|-------------------------|--------------|--------------|----------------------|--------|
| ocnaddconfiguration | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddalarm | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddadminservice | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddhealthmonitoring | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddscppaggregation | 2 | 2 | 4 | 4 | 13 | 13 | 78 | SCP |
| tcpfeed-adapter | 3 | 3 | 6 | 6 | 20 | 20 | 120 | MAIN |
| tcpfeed-2-adapter | 3 | 3 | 10 | 10 | 7 | 7 | 120 | MAIN |
| tcpfeed-3-adapter | 3 | 3 | 10 | 10 | 7 | 7 | 120 | MAIN |
| http2feed-adapter | 3 | 3 | 28 | 28 | 5 | 5 | 120 | MAIN |
| ocnaddkafka | 5 | 5 | 96 | 96 | 16 | 16 | - | - |
| kraft-controller | 1 | 1 | 2 | 2 | 3 | 3 | - | - |
| ocnaddgui | 1 | 2 | 1 | 1 | 1 | 2 | - | - |
| ocnaddiirouter | 1 | 2 | 1 | 1 | 1 | 2 | - | - |
| ocnaddfilter | 2 | 2 | 3 | 3 | 1 | 1 | - | - |
| ocnaddexport | 2 | 4 | 4 | 64 | 1 | 2 | - | - |

- **SCP:** SCP Traffic is 180K TPS using two trigger points.

Benchmark Test Results

Traffic Feed Details

Table 4-2 Traffic Feed Details

| NF | NF Traffic Copy Trigger Points | Traffic Rate | Duration in hours | E2E Traffic Feed Average Latency | E2E Traffic Feed Success Rate |
|--------|--------------------------------|--------------|-------------------|--|-------------------------------|
| OCNADD | NA | 360K MPS | 12 | http: 8ms tcp(360k): 20ms tcp(18k): 10ms | Feed: 99.99% |
| SCP | Worker | 180K TPS | 12 | NA | 99.99% |

CPU and Memory Utilization

The following table describes the OCNADD CPU and memory utilization:

Table 4-3 OCNADD CPU and Memory Utilization

| Micro-Service/ Container | CPU Utilization (%) | Memory Utilization (%) | Total Replica |
|-----------------------------|---------------------|------------------------|---------------|
| ocnaddscpaggregation | 77 | 20 | 13 |
| tcpfeed-adapter | 75.40 | 38.97 | 20 |
| tcpfeed-2-adapter | 81 | 31 | 7 |
| tcpfeed-3-adapter | 85 | 21 | 7 |
| http2feed-adapter | 80.60 | 58.52 | 5 |
| kafka-broker | 31 | 10.6 | 16 |
| kraft-controller | 3 | 51 | 3 |
| zookeeper | 0 | 0 | 0 |
| ocnaddadminservice | 0.20 | 36.80 | 1 |
| ocnaddalarm | 0.20 | 45.10 | 1 |
| ocnaddconfiguration | 0.10 | 47.60 | 1 |
| ocnaddexport | 0.10 | 56.90 | 1 |
| ocnaddgui | 0.10 | 3.30 | 1 |
| ocnaddhealthmonitoring | 0.20 | 38.80 | 1 |
| ocnadduirouter | 0.10 | 34.80 | 1 |

4.1.2 Performance Benchmarking for 360K MPS SCP Traffic with Synthetic (TCP) Feed

This performance benchmarking evaluates the deployment of OCNADD handling an SCP traffic of 360K MPS. The benchmark utilizes a TCP feed:

The benchmarking results are provided below:

Note

One Ingress message from a NF is "1" MPS for OCNADD.

Benchmark Test Environment**Execution Details**

- **Execution Time:** 12+ Hours

Call Rate

- **Total Traffic:** 360K MPS

Call Mix

- **Model:** SCP Model-C

Setup Details

- **Environment:** OCCNE 24.3.1
- **LB Type:** vCNE LBVM
- **OCNADD Version:** 25.1.200
- **cnDBTier:** 25.1.100
- **SCP Version:** 25.1.100
- **Third-Party Application:** One endpoint configured

Configuration Details

- **SCP:** Default configuration

Security & Data Feed

- **OCNADD Replication Factor:** 1
- **OCNADD Data Feed:** Synthetic (TCP)
- **OCNADD Kafka PVC:** 400 GB
- **Average Message Size:** ~3500 Bytes

Benchmark Testcase Specifications

The testcase parameters are as follows:

- **OCNADD**
 - A feed is configured using the OCNADD Console with SCP.
 - Message Ingestion Rate: 360K MPS

Resource Specifications:

Table 4-4 OCNADD Resource Specifications

| Services | Min CPU Per Pod | Max CPU Per Pod | Memory Request Per Pod (Gi) | Max Memory Per Pod (Gi) | Min Replicas | Max Replicas | Partitions/Retention | Topics |
|---------------------|-----------------|-----------------|-----------------------------|-------------------------|--------------|--------------|----------------------|--------|
| ocnaddconfiguration | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddalarm | 1 | 1 | 1 | 1 | 1 | 1 | - | - |

Table 4-4 (Cont.) OCNADD Resource Specifications

| Services | Min CPU Per Pod | Max CPU Per Pod | Memory Request Per Pod (Gi) | Max Memory Per Pod (Gi) | Min Replicas | Max Replicas | Partitions/Retention | Topics |
|------------------------|-----------------|-----------------|-----------------------------|-------------------------|--------------|--------------|----------------------|--------|
| ocnaddadminservice | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddhealthmonitoring | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddscpaggregation | 2 | 2 | 4 | 4 | 13 | 13 | 78 | SCP |
| ocnaddadapter | 3 | 3 | 6 | 6 | 20 | 20 | 120 | MAIN |
| ocnaddkafka | 5 | 5 | 48 | 48 | 11 | 11 | - | - |
| kraft-controller | 1 | 1 | 2 | 2 | 3 | 3 | - | - |
| ocnaddgui | 1 | 2 | 1 | 1 | 1 | 2 | - | - |
| ocnadduirouter | 1 | 2 | 1 | 1 | 1 | 2 | - | - |

- **SCP:** SCP Traffic is 180K TPS using two trigger points

Benchmark Test Results

Traffic Feed Details

Table 4-5 Traffic Feed Details

| NF | NF Traffic Copy Trigger Points | Traffic Rate | Duration in hours | E2E Traffic Feed Average Latency | E2E Traffic Feed Success Rate |
|--------|---|--------------|-------------------|----------------------------------|-------------------------------|
| OCNADD | NA | 360K MPS | 12 | 22.6ms | Feed: 99.99% |
| SCP | Ingress Gateway (Request) Egress Gateway (Request) | 180K TPS | 12 | NA | 99.99% |

CPU and Memory Utilization

The following table describes the OCNADD CPU and memory utilization:

Table 4-6 OCNADD CPU and Memory Utilization

| Micro-Service/ Container | CPU Utilization (%) | Memory Utilization (%) | Total Replica |
|--------------------------|---------------------|------------------------|---------------|
| ocnaddscpaggregation | 77 | 20 | 13 |
| TCP: adapter (360k) | 78.4 | 36.97 | 20 |
| kafka-broker | 35 | 15 | 11 |
| kraft-controller | 5 | 48 | 3 |
| ocnaddadminservice | 0.2 | 36.8 | 1 |
| ocnaddalarm | 0.2 | 45.1 | 1 |

Table 4-6 (Cont.) OCNADD CPU and Memory Utilization

| Micro-Service/ Container | CPU Utilization (%) | Memory Utilization (%) | Total Replica |
|-----------------------------|---------------------|------------------------|---------------|
| ocnaddconfiguration | 0.1 | 47.6 | 1 |
| ocnaddgui | 0.1 | 3.3 | 1 |
| ocnaddhealthmonitoring | 0.2 | 38.8 | 1 |
| ocnadduirouter | 0.1 | 34.8 | 1 |

4.2 Bare Metal Cluster Environment

This section gives the details of the performance tests done in Bare Metal Cluster Environment.

4.2.1 CNLB

This section gives the details of the performance tests done in CNLB Bare Metal Cluster Environment.

4.2.1.1 Performance Benchmarking for 360K MPS SCP and 450K Egress Traffic with Synthetic (TCP) and HTTP2 Feed

This performance benchmarking evaluates the deployment of OCNADD handling an SCP traffic of 360K MPS and Egress traffic of 450K MPS. The benchmark utilizes 3 synthetic (TCP) feeds and 1 HTTP2 feed:

The benchmarking results are provided below:

Note

One Ingress message from a NF is "1" MPS for OCNADD.

Benchmark Test Environment

- **Execution Time:** 24+ Hours
- **Call Rate:** 360K MPS
- **Call Mix:** SCP Model-C

Setup Details

- **Environment:** OCCNE 24.3.1
- **LB Type:** Bare metal CNLB
- **Cluster Topology:**
 - **DD:** Deployed in Cluster-1
 - **NF:** Deployed in Cluster-2
 - **Third-Party Consumers:** Deployed in Cluster-3
- **Component Versions:**

- **OCNADD:** 25.1.200
- **cnDBTier:** 25.1.100
- **SCP Version:** 25.1.100
- **Third-Party Consumers:** Two endpoints with two different egress NADs (configured in round-robin)

Configuration Details

- **SCP:** messageCopy enabled
- **Security:** SASL/SSL enabled between SCP and OCNADD
- **OCNADD:**
 - **Replication Factor:** 1
 - **Kafka PVC Size:** 400 GB
- **Data Feed Configuration:**
 - **TCP Feed:** Ingress 360K and Egress 360K
 - **TCP Filtered Feed (1):** Ingress 360K and Egress 36K
 - **TCP Filtered Feed (2):** Ingress 360K and Egress 36K
 - **HTTP Filtered Feed:** Ingress 360K and Egress 16K
- **Message Size:** Approximately 3500–4000 bytes

Benchmark Testcase Specifications

The testcase parameters are as follows:

- **OCNADD**
 - A feed is configured using the OCNADD Console with SCP.
 - Message Ingestion Rate: 360K MPS

Resource Specifications:

Table 4-7 Resource Specifications

| Services | Min CPU Per Pod | Max CPU Per Pod | Min Memory Per Pod (Gi) | Max Memory Per Pod (Gi) | Min Replicas | Max Replicas | Partitions/Retention | Topics |
|------------------------------------|-----------------|-----------------|-------------------------|-------------------------|--------------|--------------|----------------------|--------|
| ocnaddconfiguration | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddalarm | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddadminservice | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddhealthmonitoring | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddscppaggregation | 2 | 2 | 4 | 4 | 13 | 13 | 78 | SCP |
| tcpfeedcnlb-sig1-sig2-egr1-adapter | 3 | 3 | 6 | 6 | 20 | 20 | 120 | MAIN |

Table 4-7 (Cont.) Resource Specifications

| Services | Min CPU Per Pod | Max CPU Per Pod | Min Memory Per Pod (Gi) | Max Memory Per Pod (Gi) | Min Replicas | Max Replicas | Partitions/Retention | Topics |
|---------------------------------------|-----------------|-----------------|-------------------------|-------------------------|--------------|--------------|----------------------|--------|
| tcpfeedcnlb-2-sig3-sig4-egr1-adapter | 3 | 3 | 10 | 10 | 7 | 7 | 120 | MAIN |
| tcpfeedcnlb-sig3-sig4-egr1-adapter | 3 | 3 | 10 | 10 | 7 | 7 | 120 | MAIN |
| http2feed-sig3-sig4-egr1-cnlb-adapter | 3 | 3 | 28 | 28 | 5 | 5 | 120 | MAIN |
| ocnaddkafka | 5 | 5 | 96 | 96 | 16 | 16 | - | - |
| kraft-controller | 1 | 1 | 2 | 2 | 3 | 3 | - | - |
| ocnaddgui | 1 | 2 | 1 | 1 | 1 | 2 | - | - |
| ocnadduirouter | 1 | 2 | 1 | 1 | 1 | 2 | - | - |
| ocnadduirouter | 1 | 2 | 1 | 1 | 1 | 2 | - | - |
| ocnaddfilter | 2 | 2 | 3 | 3 | 1 | 1 | - | - |

- **SCP:** SCP Traffic is 180K TPS using two trigger points.

Benchmark Test Results

Traffic Feed Details

Table 4-8 Traffic Feed Details

| NF | NF Traffic Copy Trigger Points | Traffic Rate | Duration in hours | E2E Traffic Feed Average Latency | E2E Traffic Feed Success Rate |
|--------|---|--------------|-------------------|---|-------------------------------|
| OCNADD | NA | 360K MPS | 24 | httpfeed~ 21.6ms tcp feed1~ 22.2ms tcp feed3~ 28.5ms tcp feed3~ 22.7ms | NA |
| SCP | Ingress Gateway (Request) Egress Gateway (Request) | 180K TPS | 24 | NA | NA |

CPU and Memory Utilization

The following table describes the OCNADD CPU and memory utilization:

Table 4-9 OCNADD CPU and Memory Utilization

| Micro-Service/ Container | CPU Utilization (%) | Memory Utilization (%) | Total Replica |
|---|---------------------|------------------------|---------------|
| ocnaddscppaggregation | 67.6 | 24.86 | 13 |
| tcpfeedcnlb-sig1-sig2- egr1-adapter | 65.55 | 36.25 | 20 |
| tcpfeedcnlb-sig3-sig4- egr1-adapter | 56.8 | 46.72 | 7 |
| tcpfeedcnlb-2-sig3-sig4- egr1-adapter | 56.85 | 46.72 | 7 |
| http2feed-sig3-sig4- egr1-cnlb-adapter | 65.6 | 55.52 | 5 |
| kafka-broker | 48.57 | 46.4 | 16 |
| kraft-controller | 0.5 | 47 | 3 |
| ocnaddadminservice | 0.1 | 36.8 | 1 |
| ocnaddalarm | 0.2 | 45.1 | 1 |
| ocnaddconfiguration | 0.2 | 47.6 | 1 |
| ocnaddgui | 0.1 | 3.3 | 1 |
| ocnaddhealthmonitoring | 0.2 | 38.8 | 1 |
| ocnadduirouter | 0.1 | 34.8 | 1 |

4.2.1.2 Performance Benchmarking for 360K MPS SCP Traffic with Synthetic (TCP) Feed

This performance benchmarking evaluates the deployment of OCNADD handling an SCP traffic of 360K MPS. The benchmark utilizes a synthetic (TCP) feed:

The benchmarking results are provided below:

Note

One Ingress message from a NF is "1" MPS for OCNADD.

Benchmark Test Environment

- **Execution Time:** 48+ Hours
- **Call Rate:** 360K MPS
- **Call Mix:** SCP Model-C

Setup Details

- **Environment:** OCCNE 24.3.1
- **LB Type:** Bare metal CNLB
- **Cluster Topology:**
 - **DD:** Deployed in Cluster-1
 - **NF:** Deployed in Cluster-2
 - **Third-Party Consumers:** Deployed in Cluster-3

- **Component Versions:**
 - **OCNADD:** 25.1.200
 - **cnDBTier:** 25.1.100
 - **SCP Version:** 25.1.100
 - **Third-Party Consumers:** Two endpoints with two different egress NADs (configured in round-robin)

Configuration Details

- **SCP:** messageCopy enabled
- **Security:** SASL/SSL enabled between SCP and OCNADD
- **OCNADD:**
 - **Replication Factor:** 1
 - **Data Feed Protocol:** Synthetic (TCP)
 - **Kafka PVC Size:** 400 GB
- **Message Size:** Approximately 3500–4000 bytes

Benchmark Testcase Specifications

The testcase parameters are as follows:

- **OCNADD**
 - A feed is configured using the OCNADD Console with SCP.
 - Message Ingestion Rate: 360 K MPS

Resource Specifications:

Table 4-10 Resource Specifications

| Services | Min CPU Per Pod | Max CPU Per Pod | Memory Request Per Pod (Gi) | Min Memory Per Pod (Gi) | Min Replicas | Max Replicas | Partitions/Retention | Topics |
|------------------------|-----------------|-----------------|-----------------------------|-------------------------|--------------|--------------|----------------------|--------|
| ocnaddconfiguration | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddalarm | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddadminservice | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddhealthmonitoring | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddscppaggregation | 2 | 2 | 4 | 4 | 13 | 13 | 78 | SCP |
| ocnaddadapter | 3 | 3 | 6 | 6 | 20 | 20 | 120 | MAIN |
| ocnaddkafka | 5 | 5 | 48 | 48 | 16 | 16 | - | - |
| kraft-controller | 1 | 1 | 2 | 2 | 3 | 3 | - | - |
| ocnaddgui | 1 | 2 | 1 | 1 | 1 | 2 | - | - |
| ocnaddrouter | 1 | 2 | 1 | 1 | 1 | 2 | - | - |

- **SCP:** SCP Traffic is 180K TPS using two trigger points.

Benchmark Test Results**Traffic Feed Details****Table 4-11 Traffic Feed Details**

| NF | NF Traffic Copy Trigger Points | Traffic Rate | Duration in hours | E2E Traffic Feed Average Latency | E2E Traffic Feed Success Rate |
|--------|---|--------------|-------------------|----------------------------------|-------------------------------|
| OCNADD | NA | 360K MPS | 48 | 19ms | NA |
| SCP | Ingress Gateway (Request) Egress Gateway (Request) | 180K TPS | 48 | NA | NA |

CPU and Memory Utilization

The following table describes the OCNADD CPU and memory utilization:

Table 4-12 OCNADD CPU and Memory Utilization

| Micro-Service/ Container | CPU Utilization (%) | Memory Utilization (%) | Total Replica |
|--------------------------|---------------------|------------------------|---------------|
| ocnaddscpaggregation | 57.50 | 18.75 | 13 |
| adapter | 55.66 | 26.25 | 20 |
| kafka-broker | 35.15 | 12.8 | 16 |
| kraft-controller | 0.20 | 46.70 | 3 |
| ocnaddadminservice | 0.20 | 36.80 | 1 |
| ocnaddalarm | 0.20 | 45.10 | 1 |
| ocnaddconfiguration | 0.10 | 47.60 | 1 |
| ocnaddgui | 0.10 | 3.30 | 1 |
| ocnaddhealthmonitoring | 0.20 | 38.80 | 1 |
| ocnadduirouter | 0.10 | 34.80 | 1 |

4.2.1.3 Performance Benchmarking for 270K MPS Aggregated Traffic with Synthetic (TCP) Feed

This performance benchmarking evaluates the deployment of OCNADD handling an aggregated feed of 270K MPS. The breakdown includes SCP traffic (64K TPS with 2 trigger points), NRF 15K MPS (7.5K TPS with 2 trigger points) and SEPP 60K MPS (15K TPS with 4 trigger points), BSF 10K MPS (with 2 trigger points) PCF 58K MPS (with 2 trigger points). The benchmark utilizes a synthetic (TCP) feed:

The benchmarking results are provided below:

Note

One Ingress message from a NF is "1" MPS for OCNADD.

Benchmark Test Environment

Execution Details

- **Execution Time:** 12+ Hours

Call Rate

- **SCP Traffic:** 128K MPS (64K TPS with 2 trigger points)
- **NRF:** 15K MPS (7.5K TPS with 2 trigger points)
- **SEPP:** 60K MPS (15K TPS with 4 trigger points)
- **BSF:** 10K MPS (2 trigger points)
- **PCF:** 58K MPS (2 trigger points)

Call Mix

- **NF Call Mix:** SCP, NRF, SEPP, BSF and PCF NF Call mix models

Setup Details

- **Environment:** OCCNE 24.3.1
- **LB Type:** Bare metal CNLB
- **Cluster Topology:**
 - **DD:** Cluster-1
 - **NF:** Cluster-2
 - **Third-Party Consumers:** Cluster-3
- **OCNADD Version:** 25.1.200
- **cnDBTier:** 25.1.100

Network Functions (NFs)

- **SCP:** 25.1.100
- **NRF:** 25.1.100
- **SEPP:** 25.1.100
- **BSF:** 25.1.100
- **PCF:** 25.1.100

Third-Party Consumers

- Two endpoints with two different egress NADs (round-robin)

Configuration Details

- **NRF:** Ingress Gateway and Egress Gateway `messageCopy` enabled
- **SCP:** Default configuration
- **cSEPP:**Ingress PLMN/N32 and Egress PLMN/N32 `messageCopy` enabled
- **pSEPP:**`messageCopy` disabled
- **PCF:** Ingress Gateway and Egress Gateway `messageCopy` enabled
- **BSF:** Ingress Gateway and Egress Gateway `messageCopy` enabled

Security and Data Feed

- **SASL/SSL:** Enabled between BSF and OCNADD
- **OCNADD Replication Factor:** 1
- **OCNADD Data Feed:** HTTP2
- **OCNADD Kafka PVC:** 400 GB
- **Average Message Size:** ~3500 Bytes

Benchmark Testcase Specifications

The testcase parameters are as follows:

- **OCNADD**
 - A feed is configured using the OCNADD Console with aggregation rules set for SCP, NRF, SEPP, BSF, and PCF.
 - Message Ingestion Rate: 270K MPS

Resource Specifications:

Table 4-13 OCNADD Resource Specifications

| Services | Min CPU Per Pod | Max CPU Per Pod | Min Memory Per Pod (Gi) | Max Memory Per Pod (Gi) | Min Replicas | Max Replicas | Partitions/Retention | Topics |
|------------------------|-----------------|-----------------|-------------------------|-------------------------|--------------|--------------|----------------------|--------|
| ocnaddconfiguration | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddalarm | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddadminservice | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddhealthmonitoring | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddscppaggregation | 2 | 2 | 4 | 4 | 5 | 5 | 30 | SCP |
| ocnaddnrffaggregation | 2 | 2 | 2 | 2 | 1 | 1 | 6 | NRF |
| ocnaddseppaggregation | 2 | 2 | 4 | 4 | 3 | 3 | 18 | SEPP |
| ocnaddadapter | 3 | 3 | 6 | 6 | 15 | 15 | 90 | MAIN |
| ocnaddkafka | 4 | 4 | 48 | 48 | 11 | 11 | - | - |
| kraft-controller | 1 | 1 | 1 | 2 | 3 | 3 | - | - |
| ocnaddgui | 1 | 2 | 1 | 1 | 1 | 2 | - | - |
| ocnadduirouter | 1 | 2 | 1 | 1 | 1 | 2 | - | - |
| ocnaddfilter | 2 | 2 | 3 | 3 | 1 | 1 | - | - |
| ocnaddexport | 2 | 4 | 4 | 64 | 1 | 2 | - | - |
| ocnaddpcfaggregation | 2 | 2 | 2 | 2 | 3 | 3 | 18 | PCF |
| ocnaddbsffaggregation | 2 | 2 | 2 | 2 | 1 | 1 | 6 | BSF |

- **SCP Traffic:** 128K MPS (64K TPS with 2 trigger points)
- **NRF:** 15K MPS (7.5K TPS with 2 trigger points)

- **SEPP:** 60K MPS (15K TPS with 4 trigger points)
- **BSF:** 10K MPS (2 trigger points)
- **PCF:** 58K MPS (2 trigger points)

Benchmark Test Results

Traffic Feed Details

Table 4-14 Traffic Feed Details

| NF | NF Traffic Copy Trigger Points | Traffic Rate | Duration in hours | E2E Traffic Feed Average Latency | E2E Traffic Feed Success Rate |
|--------|---|--------------|-------------------|----------------------------------|-------------------------------|
| OCNADD | NA | 270K MPS | 12 | 33.6ms | Feed: 99.98% |
| PCF | Ingress Gateway (Request) Egress Gateway (Request) | 58K TPS | 12 | NA | 99.99% |
| SCP | Ingress Gateway (Request) Egress Gateway (Request) | 128K TPS | 12 | NA | 99.95% |
| BSF | Ingress Gateway (Request) Egress Gateway (Request) | 10K TPS | 12 | NA | 100% |
| NRF | Ingress Gateway (Request) Egress Gateway (Request) | 15K TPS | 12 | NA | 99.98% |
| SEPP | Ingress plmn/n32 Gateway (Request) Egress plmn/n32 Gateway (Request) | 60K TPS | 12 | NA | 99.91% |

CPU and Memory Utilization

The following table describes the OCNADD CPU and memory utilization:

Table 4-15 OCNADD CPU and Memory Utilization

| Micro-Service/ Container | CPU Utilization (%) | Memory Utilization (%) | Total Replica |
|-----------------------------|---------------------|------------------------|---------------|
| ocnaddrfaggregation | 58.4 | 31.9 | 1 |
| ocnaddpcfaggregation | 55.2 | 27.8 | 3 |
| ocnaddbsfaggregation | 35.4 | 20.9 | 1 |
| ocnaddscpaggregation | 62.4 | 19.9 | 5 |
| ocnaddseppaggregation | 58.2 | 17.1 | 3 |
| adapter | 59.5 | 13.1 | 15 |
| kafka-broker | 57.2 | 11.6 | 11 |
| kraft-controller | 0.455 | 42.4 | 3 |
| ocnaddadminservice | 0.417 | 29.3 | 1 |
| ocnaddalarm | 0.137 | 33.7 | 1 |
| ocnaddconfiguration | 0.129 | 34.2 | 1 |
| ocnaddgui | 0.00100 | 3.32 | 1 |
| ocnaddhealthmonitoring | 0.382 | 33.8 | 1 |
| ocnadduirouter | 0.00838 | 29.5 | 1 |

4.2.1.4 Performance Benchmarking for 270K MPS Aggregated Traffic with HTTP2 Feed

This performance benchmarking evaluates the deployment of OCNADD handling an aggregated feed of 270K MPS. The breakdown includes 128K MPS SCP traffic (64K TPS with 2 trigger points), NRF 15K MPS (7.5K TPS with 2 trigger points) & SEPP 60K MPS (15K TPS with 4 trigger points), BSF 10K MPS (with 2 trigger points) PCF 58K MPS (with 2 trigger points). The benchmark utilizes an HTTP2 feed:

The benchmarking results are provided below:

Note

One Ingress message from a NF is "1" MPS for OCNADD.

Benchmark Test Environment

Execution Details

- **Execution Time:** 12+ Hours

Call Rate

- **SCP Traffic:** 128K MPS (64K TPS with 2 trigger points)
- **NRF:** 15K MPS (7.5K TPS with 2 trigger points)
- **SEPP:** 60K MPS (15K TPS with 4 trigger points)
- **BSF:** 10K MPS (2 trigger points)
- **PCF:** 58K MPS (2 trigger points)

Call Mix

- **NF Call Mix:** SCP, NRF, SEPP, BSF and PCF NF Call mix models

Setup Details

- **Environment:** OCCNE 24.3.1
- **LB Type:** Bare metal CNLB
- **Cluster Topology:**
 - **DD:** Cluster-1
 - **NF:** Cluster-2
 - **Third-Party Consumers:** Cluster-3
- **OCNADD Version:** 25.1.200
- **cnDBTier:** 25.1.100

Network Functions (NFs)

- **SCP:** 25.1.100
- **NRF:** 25.1.100
- **SEPP:** 25.1.100
- **BSF:** 25.1.100
- **PCF:** 25.1.100

Third-Party Consumers

- Two endpoints with two different egress NADs
- **Load Balancing:** Weighted (50–50% or 60–40% distribution)

Configuration Details

- **NRF:** Ingress Gateway & Egress Gateway `messageCopy` enabled
- **SCP:** Default configuration
- **cSEPP:** Ingress PLMN/N32 and Egress PLMN/N32 `messageCopy` enabled
- **pSEPP:** `messageCopy` disabled
- **PCF:** Ingress Gateway & Egress Gateway `messageCopy` enabled
- **BSF:** Ingress Gateway & Egress Gateway `messageCopy` enabled

Security & Data Feed

- **SASL/SSL:** Enabled between BSF and OCNADD
- **OCNADD Replication Factor:** 1
- **OCNADD Data Feed:** HTTP2
- **OCNADD Kafka PVC:** 400 GB
- **Average Message Size:** ~3500 Bytes

Benchmark Testcase Specifications

The testcase parameters are as follows:

- **OCNADD**
 - A feed is configured using the OCNADD Console with aggregation rules set for SCP, NRF, SEPP, BSF, and PCF.

- Message Ingestion Rate: 270K MPS

Resource Specifications:

Table 4-16 OCNADD Resource Specifications

| Services | Min CPU Per Pod | Max CPU Per Pod | Memory Request Per Pod (Gi) | Memory Limit Per Pod (Gi) | Min Replicas | Max Replicas | Partitions/Retention | Topics |
|------------------------|-----------------|-----------------|-----------------------------|---------------------------|--------------|--------------|----------------------|--------|
| ocnaddconfiguration | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddalarm | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddadminservice | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddhealthmonitoring | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddscpaggregation | 2 | 2 | 4 | 4 | 5 | 5 | 30 | SCP |
| ocnaddnrfaggregation | 2 | 2 | 2 | 2 | 1 | 1 | 6 | NRF |
| ocnaddseppaggregation | 2 | 2 | 4 | 4 | 3 | 3 | 18 | SEPP |
| ocnaddadapter | 3 | 3 | 6 | 6 | 23 | 23 | 207 | MAIN |
| ocnaddkafka | 4 | 4 | 48 | 48 | 11 | 11 | - | - |
| kraft-controller | 1 | 1 | 2 | 2 | 3 | 3 | - | - |
| ocnaddgui | 1 | 2 | 1 | 1 | 1 | 2 | - | - |
| ocnadduirouter | 1 | 2 | 1 | 1 | 1 | 2 | - | - |
| ocnaddfilter | 2 | 2 | 3 | 3 | 1 | 1 | - | - |
| ocnaddexport | 2 | 4 | 4 | 64 | 1 | 2 | - | - |
| ocnaddpcfaggregation | 2 | 2 | 2 | 2 | 2 | 2 | 12 | PCF |
| ocnaddbsfaggregation | 2 | 2 | 2 | 2 | 1 | 1 | 6 | BSF |

- **SCP Traffic:** 128K MPS (64K TPS with 2 trigger points)
- **NRF:** 15K MPS (7.5K TPS with 2 trigger points)
- **SEPP:** 60K MPS (15K TPS with 4 trigger points)
- **BSF:** 10K MPS (2 trigger points)
- **PCF:** 58K MPS (2 trigger points)

Benchmark Test Results

Traffic Feed Details

Table 4-17 Traffic Feed Details

| NF | NF Traffic Copy Trigger Points | Traffic Rate | Duration in hours | E2E Traffic Feed Average Latency | E2E Traffic Feed Success Rate |
|--------|---|--------------|-------------------|----------------------------------|-------------------------------|
| OCNADD | NA | 270K MPS | 12 | 33.6ms | Feed: 99.98% |
| PCF | Ingress Gateway (Request) Egress Gateway (Request) | 58K TPS | 12 | NA | 99.99% |
| SCP | Ingress Gateway (Request) Egress Gateway (Request) | 128K TPS | 12 | NA | 99.95% |
| BSF | Ingress Gateway (Request) Egress Gateway (Request) | 10K TPS | 12 | NA | 100% |
| NRF | Ingress Gateway (Request) Egress Gateway (Request) | 15K TPS | 12 | NA | 99.98% |
| SEPP | Ingress plmn/n32 Gateway (Request) Egress plmn/n32 Gateway (Request) | 60K TPS | 12 | NA | 99.91% |

CPU and Memory Utilization

The following table describes the OCNADD CPU and memory utilization:

Table 4-18 OCNADD CPU and Memory Utilization

| Micro-Service/ Container | CPU Utilization (%) | Memory Utilization (%) | Total Replica |
|--------------------------|---------------------|------------------------|---------------|
| ocnaddnrfaggregation | 62.3 | 35.5 | 1 |
| ocnaddpcfaggregation | 61.8 | 30.7 | 2 |
| ocnaddbsfaggregation | 40.3 | 17.9 | 1 |
| ocnaddscpaggregation | 65.3 | 21.3 | 5 |
| ocnaddseppaggregation | 60.2 | 18.7 | 3 |
| adapter | 42.6 | 55.9 | 23 |

Table 4-18 (Cont.) OCNADD CPU and Memory Utilization

| Micro-Service/ Container | CPU Utilization (%) | Memory Utilization (%) | Total Replica |
|-----------------------------|---------------------|------------------------|---------------|
| kafka-broker | 61.1 | 42.6 | 11 |
| kraft-controller | 0.448 | 50.3 | 3 |
| ocnaddadminservice | 0.0581 | 28.5 | 1 |
| ocnaddalarm | 5.77 | 32.3 | 1 |
| ocnaddconfiguration | 0.135 | 34.1 | 1 |
| ocnaddgui | 0.000994 | 3.32 | 1 |
| ocnaddhealthmonitoring | 0.496 | 33.6 | 1 |
| ocnadduirouter | 0.00817 | 29.7 | 1 |

4.2.2 LBVM

This section gives the details of the performance tests done in LBVM Bare Metal Cluster Environment.

4.2.2.1 Performance Benchmarking for 135K MPS Traffic with Synthetic Feed Replication

This performance benchmarking evaluates a centralized deployment with a single worker group, handling an aggregated feed of 135K MPS. The breakdown includes 90K MPS for SCP (45K TPS with 2 trigger points), 30K MPS for SEPP (15K TPS with 2 trigger points), and 15K MPS for NRF (7.5K TPS with 2 trigger points). The benchmark utilizes a replicated synthetic feed:

The benchmarking results are provided below:

Note

One Ingress message from a NF is "1" MPS for OCNADD.

Benchmark Test Environment

- **Ingress Traffic Rate:** 135K MPS
- **Observation Period:** 3+ hours
- **Deployment:** OCNADD single-site, ASM disabled
- **Kafka Replication Factor:** 1
- **Kafka PVC:** 400GB
- **Data Feed:** Two TCP (Synthetic) Feeds (TLS enabled)
- **Third-Party Applications:** 1 endpoint per feed
- **Software Versions:**
 - **cnDBTier:** 24.3.0
 - **SCP:** 24.3.0

- **NRF:** 24.3.0
- **SEPP:** 24.3.0
- **CNCC:** 24.3.0
- **Security:** SASL/SSL enabled between NRF, SCP, SEPP, and OCNADD
- **Message Size:** ~3500 Bytes
- **Execution Time:** 24 hours
- **Call Mix:** SCP, NRF, and SEPP NF CALL MIX models

Setup Details

- **Environment:** OCCNE 23.3.4
- **LB Type:** Bare metal LBVM
- **OCNADD:** 25.1.100

Configuration

- **NRF:** Ingress Gateway and Egress Gateway messageCopy enabled
- **SCP:** Default configuration
- **cSEPP:** PLMN Ingress Gateway messageCopy enabled
- **pSEPP:** messageCopy disabled
- **OCNADD:**
 - Replication Factor: 1
 - Kafka PVC: 400GB. For more information about PVC requirements, see [Kafka PVC Storage Requirements](#).

Benchmark Testcase Specifications

The testcase parameters are as follows:

- **OCNADD**
 - A feed is configured using the OCNADD Console with aggregation rules set for SCP, NRF and SEPP.
 - Message Ingestion Rate: 135K MPS

Resource Specifications:

Table 4-19 OCNADD Resource Specifications

| Services | Min CPU Per Pod | Max CPU Per Pod | Min Memory Per Pod (Gi) | Max Memory Per Pod (Gi) | Min Replicas | Max Replicas | Partitions/Retention | Topics |
|---------------------|-----------------|-----------------|-------------------------|-------------------------|--------------|--------------|----------------------|--------|
| ocnaddadapter | 3 | 3 | 6 | 6 | 11 | 11 | 66 | MAIN |
| ocnaddadminservice | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddalarm | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddconfiguration | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddexport | 2 | 4 | 4 | 64 | 1 | 2 | - | - |

Table 4-19 (Cont.) OCNADD Resource Specifications

| Services | Min CPU Per Pod | Max CPU Per Pod | Min Memory Per Pod (Gi) | Max Memory Per Pod (Gi) | Min Replicas | Max Replicas | Partitions/Retention | Topics |
|------------------------|-----------------|-----------------|-------------------------|-------------------------|--------------|--------------|----------------------|--------|
| ocnaddgui | 1 | 2 | 1 | 1 | 1 | 2 | - | - |
| ocnaddhealthmonitoring | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddkafka | 7.5 | 7.5 | 96 | 96 | 6 | 6 | - | - |
| ocnaddnrfaggregation | 2 | 2 | 2 | 2 | 1 | 1 | 6 | NRF |
| ocnaddscpaggregation | 2 | 2 | 4 | 4 | 5 | 5 | 30 | SCP |
| ocnaddseppaggregation | 2 | 2 | 4 | 4 | 2 | 2 | 12 | SEPP |
| ocnaddrouter | 1 | 2 | 1 | 1 | 1 | 2 | - | - |
| zookeeper | 1 | 1 | 1 | 2 | 3 | 3 | - | - |

- **SCP:** 90K MPS traffic (45K TPS with 2 trigger points)
- **NRF:** 15K MPS traffic (7.5K TPS with 2 trigger points)
- **SEPP** 30K MPS traffic (15K TPS with 2 trigger points)

Benchmark Test Results

Traffic Feed Details

Table 4-20 Traffic Feed Details

| NF | NF Traffic Copy Trigger Points | Traffic Rate | Duration in hours | E2E Traffic Feed Average Latency | E2E Traffic Feed Success Rate |
|--------|---|--------------|-------------------|--|----------------------------------|
| OCNADD | NA | 135K MPS | 24 | Feed-1: 26.9 msec Feed-2: 26.5 msec | Feed-1: 99.98% Feed-2: 99.98% |
| SCP | Ingress Gateway (Request) Egress Gateway (Request) | 45K TPS | 24 | NA | 99.98% |
| NRF | Ingress Gateway (Request) Egress Gateway (Request) | 7.5K TPS | 24 | NA | 99.98% |

Table 4-20 (Cont.) Traffic Feed Details

| NF | NF Traffic Copy Trigger Points | Traffic Rate | Duration in hours | E2E Traffic Feed Average Latency | E2E Traffic Feed Success Rate |
|------|---|--------------|-------------------|----------------------------------|-------------------------------|
| SEPP | Ingress Gateway (Request) Egress Gateway (Request) | 15K TPS | 24 | NA | 99.98% |

CPU and Memory Utilization

The following table describes the OCNADD CPU and memory utilization:

Table 4-21 OCNADD CPU and Memory Utilization

| Micro-Service/ Container | CPU Utilization (%) | Memory Utilization (%) | Total Replica |
|--------------------------|---------------------|------------------------|---------------|
| adapter-1 | 60.6 | 19.0 | 11 |
| adapter-2 | 63.0 | 19.4 | 11 |
| kafka-broker | 40.1 | 25.8 | 6 |
| ocnaddadminservice | 0.138 | 24.1 | 1 |
| ocnaddalarm | 0.217 | 27.5 | 1 |
| ocnaddconfiguration | 0.164 | 34.9 | 1 |
| ocnaddexport | 0.0115 | 2.33 | 1 |
| ocnaddgui | 0.00108 | 3.12 | 1 |
| ocnaddhealthmonitoring | 0.530 | 34.5 | 1 |
| ocnaddnrffaggregation | 70.4 | 32.4 | 1 |
| ocnaddscppaggregation | 58.0 | 18.6 | 5 |
| ocnaddseppaggregation | 70.0 | 20.3 | 2 |
| ocnadduirouter | 0.00758 | 28.7 | 1 |
| zookeeper | 0.125 | 31.0 | 3 |

4.2.2.2 Performance Benchmarking for 270K MPS SCP Traffic with Synthetic Feed

This performance benchmarking evaluates a centralized deployment with a single worker group, handling an SCP Model-C traffic of 270K MPS. The benchmark utilizes a synthetic feed:

The benchmarking results are provided below:

Note

One Ingress message from a NF is "1" MPS for OCNADD.

Benchmark Test Environment

- **Ingress Traffic Rate:** 270K MPS
- **Observation Period:** 3+ hours

- **Deployment:** OCNADD single-site, ASM disabled
- **Kafka Replication Factor:** 1
- **Kafka PVC:** 300GB
- **Data Feed:** TCP (Synthetic)
- **Third-Party Applications:** 1 endpoint per feed
- **Software Versions:**
 - **cnDBTier:** 24.3.0
 - **NRF:** 24.3.0
 - **CNCC:** 24.3.0
- **Security:** SASL/SSL enabled between between SCP and OCNADD
- **Message Size:** ~3500 - 4000 Bytes
- **Execution Time:** 14 hours
- **Call Mix:** SCP Model-C

Setup Details

- **Environment:** OCCNE 23.3.4
- **LB Type:** Bare metal LBVM
- **OCNADD:** 25.1.100

Configuration

- **SCP:** Default configuration, messageCopy enabled
- **OCNADD:**
 - Replication Factor: 1
 - Kafka PVC: 300GB. For more information about PVC requirements, see [Kafka PVC Storage Requirements](#).

Benchmark Testcase Specifications

The testcase parameters are as follows:

- **OCNADD**
 - A feed is configured using the OCNADD Console with SCP.
 - Message Ingestion Rate: 270K MPS

Resource Specifications:

Table 4-22 OCNADD Resource Specifications

| Services | Min CPU Per Pod | Max CPU Per Pod | Min Memory Per Pod (Gi) | Max Memory Per Pod (Gi) | Min Replicas | Max Replicas | Partitions/Retention | Topics |
|---------------------|-----------------|-----------------|-------------------------|-------------------------|--------------|--------------|----------------------|--------|
| ocnaddadapter(TCPs) | 3 | 3 | 6 | 6 | 21 | 21 | 126 | MAIN |
| ocnaddadminservice | 1 | 1 | 1 | 1 | 1 | 1 | - | - |

Table 4-22 (Cont.) OCNADD Resource Specifications

| Services | Min CPU Per Pod | Max CPU Per Pod | Min Memory Per Pod (Gi) | Max Memory Per Pod (Gi) | Min Replicas | Max Replicas | Partitions/Retention | Topics |
|------------------------|-----------------|-----------------|-------------------------|-------------------------|--------------|--------------|----------------------|--------|
| ocnaddalarm | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddconfiguration | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddexport | 2 | 4 | 4 | 64 | 1 | 2 | - | - |
| ocnaddgui | 1 | 2 | 1 | 1 | 1 | 2 | - | - |
| ocnaddhealthmonitoring | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddkafka | 5 | 5 | 48 | 48 | 11 | 11 | - | - |
| ocnaddscppaggregation | 2 | 2 | 4 | 4 | 11 | 11 | 66 | SCP |
| ocnadduirouter | 1 | 2 | 1 | 1 | 1 | 2 | - | - |
| zookeeper | 1 | 1 | 1 | 2 | 3 | 3 | - | - |

- **SCP:** SCP Traffic is 135K TPS using two trigger points.

Benchmark Test Results

Traffic Feed Details

Table 4-23 Traffic Feed Details

| NF | NF Traffic Copy Trigger Points | Traffic Rate | Duration in hours | E2E Traffic Feed Average Latency | E2E Traffic Feed Success Rate |
|--------|---|--------------|-------------------|----------------------------------|-------------------------------|
| OCNADD | NA | 270K MPS | 14 | 51.1 msec | 99.99% |
| SCP | Ingress Gateway (Request) Egress Gateway (Request) | 135K MPS | 14 | NA | 99.98% |

CPU and Memory Utilization

The following table describes the OCNADD CPU and memory utilization:

Table 4-24 OCNADD CPU and Memory Utilization

| Micro-Service/ Container | CPU Utilization (%) | Memory Utilization (%) | Total Replica |
|--------------------------|---------------------|------------------------|---------------|
| ocnaddscppaggregation | 65.5 | 29.8 | 11 |
| ocnaddadapter(TCPs) | 58.1 | 29.0 | 21 |
| kafka-broker | 44.1 | 60.5 | 11 |
| zookeeper | 0.152 | 33.7 | 3 |
| ocnaddadminservice | 0.134 | 27.9 | 1 |
| ocnaddalarm | 0.399 | 18.4 | 1 |

Table 4-24 (Cont.) OCNADD CPU and Memory Utilization

| Micro-Service/ Container | CPU Utilization (%) | Memory Utilization (%) | Total Replica |
|-----------------------------|---------------------|------------------------|---------------|
| ocnaddconfiguration | 0.232 | 33.9 | 1 |
| ocnaddexport | 0.0183 | 2.21 | 1 |
| ocnaddgui | 0.00110 | 3.12 | 1 |
| ocnaddhealthmonitoring | 0.710 | 33.2 | 1 |
| ocnadduirouter | 0.00812 | 25.3 | 1 |

4.2.2.3 Performance Benchmarking for 270K MPS SCP Traffic with Kafka Feed

This performance benchmarking evaluates a centralized deployment with a single worker group, handling an SCP traffic of 270K MPS. The benchmark utilizes a Kafka feed:

The benchmarking results are provided below:

Note

One Ingress message from a NF is "1" MPS for OCNADD.

Benchmark Test Environment

- **Ingress Traffic Rate:** 270K MPS
- **Observation Period:** 3+ hours
- **Deployment:** OCNADD single-site, ASM disabled
- **Kafka Replication Factor:** 1
- **Kafka PVC:** 300GB
- **Data Feed:** Kafka-feed
- **Third-Party Consumers:** 1 endpoint per feed
- **Software Versions:**
 - **cnDBTier:** 24.3.0
 - **SCP:** 24.3.0
 - **CNCC:** 24.3.0
- **Security:** SASL/SSL enabled between between SCP and OCNADD
- **Message Size:** ~3500 - 4000 Bytes
- **Execution Time:** 12 hours
- **Call Mix:** SCP SCP Model-C

Setup Details

- **Environment:** OCCNE 23.3.4
- **LB Type:** Bare metal LBVM
- **OCNADD:** 25.1.100

Configuration

- **SCP:** Default configuration, messageCopy enabled
- **OCNADD:**
 - Replication Factor: 1
 - Kafka PVC: 300GB. For more information about PVC requirements, see [Kafka PVC Storage Requirements](#).

Benchmark Testcase Specifications

The testcase parameters are as follows:

- **OCNADD**
 - A feed is configured using the OCNADD Console with SCP.
 - Message Ingestion Rate: 270 K MPS

Resource Specifications:

Table 4-25 Resource Specifications

| Services | Min CPU Per Pod | Max CPU Per Pod | Memory Request Per Pod (Gi) | Max Memory Per Pod (Gi) | Min Replicas | Max Replicas | Partitions/Retention | Topics |
|------------------------|-----------------|-----------------|-----------------------------|-------------------------|--------------|--------------|----------------------|--------|
| ocnaddadapter | - | - | - | - | - | - | 261 | MAIN |
| ocnaddadminservice | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddalarm | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddconfiguration | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddexport | 2 | 4 | 4 | 64 | 1 | 2 | - | - |
| ocnaddgui | 1 | 2 | 1 | 1 | 1 | 2 | - | - |
| ocnaddhealthmonitoring | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddkafka | 5 | 5 | 48 | 48 | 11 | 11 | - | - |
| ocnaddscppaggregation | 2 | 2 | 4 | 4 | 11 | 11 | 66 | SCP |
| ocnaddrouter | 1 | 2 | 1 | 1 | 1 | 2 | - | - |
| zookeeper | 1 | 1 | 1 | 2 | 3 | 3 | - | - |

- **SCP:** SCP Traffic is 135K TPS using two trigger points.

Benchmark Test Results

Traffic Feed Details

Table 4-26 Traffic Feed Details

| NF | NF Traffic Copy Trigger Points | Traffic Rate | Duration in hours | E2E Traffic Feed Average Latency | E2E Traffic Feed Success Rate |
|--------|---|--------------|-------------------|--|----------------------------------|
| OCNADD | NA | 270K MPS | 12 | Feed-1: 26.9 msec Feed-2: 26.5 msec | Feed-1: 99.98% Feed-2: 99.98% |
| SCP | Ingress Gateway (Request) Egress Gateway (Request) | 135K TPS | 12 | NA | 99.98% |

CPU and Memory Utilization

The following table describes the OCNADD CPU and memory utilization:

Table 4-27 OCNADD CPU and Memory Utilization

| Micro-Service/ Container | CPU Utilization (%) | Memory Utilization (%) | Total Replica |
|--------------------------|---------------------|------------------------|---------------|
| kafka-broker | 46.1 | 16.3 | 11 |
| ocnaddadminservice | 0.0855 | 25.9 | 1 |
| ocnaddalarm | 0.80 | 26.8 | 1 |
| ocnaddconfiguration | 0.139 | 33.2 | 1 |
| ocnaddexport | 0.0115 | 2.18 | 1 |
| ocnaddgui | 0.000999 | 3.10 | 1 |
| ocnaddhealthmonitoring | 0.339 | 35.0 | 1 |
| ocnaddscpaggregation | 68.2 | 27.9 | 11 |
| ocnadduirouter | 0.00654 | 54.0 | 1 |
| zookeeper | 0.121 | 28.8 | 3 |

4.2.2.4 Performance Benchmarking for 9K BSF Traffic with HTTP2 Feed

The performance benchmarking test is performed on OCNADD with 9K traffic with HTTPS feed. The traffic includes:

- BSF Traffic: 9K MPS
- Enabled BSF Ingress Gateway and Egress Gateway Message Copy Feature.

The benchmarking results are provided below:

Note

One Ingress message from a NF is "1" MPS for OCNADD.

Benchmark Test Environment

- **Ingress Traffic Rate:** 9K MPS
- **Observation Period:** 3+ hours
- **Deployment:** OCNADD single-site, ASM disabled
- **Kafka Replication Factor:** 1
- **Kafka PVC:** 30GB
- **Data Feed:** HTTP2
- **Third-Party Applications:** 1 endpoint per feed
- **Software Versions:**
 - **cnDBTier:** 24.3.0
 - **BSF:** 24.3.0
 - **CNCC:** 24.3.0
- **Security:** SASL/SSL enabled between between BSF and OCNADD
- **Message Size:** ~1200 Bytes
- **Execution Time:** 12 hours
- **Call Mix:** Binding-Create/Delete

Setup Details

- **Environment:** OCCNE 23.3.4
- **LB Type:** Bare metal LBVM
- **OCNADD:** 25.1.100

Configuration

- **BSF:** Ingress Gateway and Egress Gateway messageCopy enabled
- **OCNADD:**
 - Replication Factor: 1
 - Kafka PVC: 30GB. For more information about PVC requirements, see [Kafka PVC Storage Requirements](#).

Benchmark Testcase Specifications

The testcase parameters are as follows:

- **OCNADD**
 - A feed is configured using the OCNADD Console with BSF.
 - Message Ingestion Rate: 9K MPS

Resource Specifications:

Table 4-28 OCNADD Resource Specifications

| Services | Min CPU Per Pod | Max CPU Per Pod | Min Memory Per Pod (Gi) | Max Memory Per Pod (Gi) | Min Replicas | Max Replicas | Partitions/Retention | Topics |
|------------------------|-----------------|-----------------|-------------------------|-------------------------|--------------|--------------|----------------------|--------|
| ocnaddadapter | 3 | 3 | 4 | 4 | 1 | 1 | 9 | MAIN |
| ocnaddadminservice | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddalarm | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddbsfaggregation | 3 | 3 | 4 | 4 | 1 | 1 | 6 | BSF |
| ocnaddconfiguration | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddexport | 2 | 4 | 4 | 64 | 1 | 2 | - | - |
| ocnaddfilter | 2 | 2 | 3 | 3 | 1 | 1 | - | - |
| ocnaddgui | 1 | 2 | 1 | 1 | 1 | 2 | - | - |
| ocnaddhealthmonitoring | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddkafka | 2 | 2 | 24 | 24 | 4 | 4 | - | - |
| ocnaddrouter | 1 | 2 | 1 | 1 | 1 | 2 | - | - |
| zookeeper | 1 | 1 | 1 | 2 | 3 | 3 | - | - |

- **BSF** : BSF Traffic: 4.5K TPS using two trigger points.

Benchmark Test Results

Traffic Feed Details

Table 4-29 Traffic Feed Details

| NF | NF Traffic Copy Trigger Points | Traffic Rate | Duration in hours | E2E Traffic Feed Average Latency | E2E Traffic Feed Success Rate |
|--------|---|--------------|-------------------|----------------------------------|-------------------------------|
| OCNADD | NA | 9K MPS | 12 | 20.20ms | Feed: 100% |
| BSF | Ingress Gateway (Request) Egress Gateway (Request) | 4.5K TPS | 12 | NA | 100% |

CPU and Memory Utilization

The following table describes the OCNADD CPU and memory utilization:

Table 4-30 OCNADD CPU and Memory Utilization

| Micro-Service/ Container | CPU Utilization (%) | Memory Utilization (%) | Total Replica |
|--------------------------|---------------------|------------------------|---------------|
| adapter | 33.5 | 32.1 | 1 |
| kafka-broker | 12.3 | 11.4 | 4 |

Table 4-30 (Cont.) OCNADD CPU and Memory Utilization

| Micro-Service/ Container | CPU Utilization (%) | Memory Utilization (%) | Total Replica |
|-----------------------------|---------------------|------------------------|---------------|
| ocnaddadminservice | 0.287 | 27.5 | 1 |
| ocnaddalarm | 0.0963 | 37.7 | 1 |
| ocnaddbsfaggregation | 31.0 | 22.1 | 1 |
| ocnaddconfiguration | 0.110 | 36.7 | 1 |
| ocnaddexport | 0.00686 | 2.32 | 1 |
| ocnaddgui | 0.00107 | 3.13 | 1 |
| ocnaddhealthmonitoring | 0.0898 | 35.1 | 1 |
| ocnadduirouter | 0.00664 | 29.5 | 1 |
| zookeeper | 0.122 | 27.0 | 3 |

4.2.2.5 Performance Benchmarking for 30K MPS PCF Traffic with HTTP2 Feed

The performance benchmarking test is performed on OCNADD with 31K MPS traffic with HTTP2 feed. The traffic includes:

- PCF Traffic: 30K MPS
- Enabled PCF Ingress Gateway and Egress Gateway Message Copy Feature.

The benchmarking results are provided below:

Note

One Ingress message from a NF is "1" MPS for OCNADD.

Benchmark Test Environment

- **Ingress Traffic Rate:** 30K MPS
- **Observation Period:** 3+ hours
- **Deployment:** OCNADD single-site, ASM disabled
- **Kafka Replication Factor:** 1
- **Kafka PVC:** 50GB
- **Data Feed:** HTTP2
- **Third-Party Applications:** 1 endpoint per feed
- **Software Versions:**
 - **cnDBTier:** 24.3.0
 - **PCF:** 24.3.0
 - **CNCC:** 24.3.0
- **Security:** SASL/SSL enabled between between PCF and OCNADD
- **Message Size:** ~2079 Bytes
- **Execution Time:** 12 hours

- **Call Mix:** Session Management (SM) traffic

Setup Details

- **Environment:** OCCNE 23.3.4
- **LB Type:** Bare metal LBVM
- **OCNADD:** 25.1.100

Configuration

- **PCF:** Ingress Gateway and Egress Gateway messageCopy enabled
- **OCNADD:**
 - Replication Factor: 1
 - Kafka PVC: 50GB. For more information about PVC requirements, see [Kafka PVC Storage Requirements](#).

Benchmark Testcase Specifications

The testcase parameters are as follows:

- **OCNADD**
 - A feed is configured using the OCNADD Console with PCF.
 - Message Ingestion Rate: 30K MPS

Resource Specifications:

Table 4-31 OCNADD Resource Specifications

| Services | Min CPU Per Pod | Max CPU Per Pod | Min Memory Per Pod (Gi) | Max Memory Per Pod (Gi) | Min Replicas | Max Replicas | Partitions/Retention | Topics |
|------------------------|-----------------|-----------------|-------------------------|-------------------------|--------------|--------------|----------------------|--------|
| ocnaddadapter | 3 | 3 | 4 | 4 | 3 | 3 | 27 | MAIN |
| ocnaddadminservice | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddalarm | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddpcfaggregation | 2 | 2 | 2 | 2 | 2 | 2 | 12 | PCF |
| ocnaddconfiguration | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddexport | 2 | 4 | 4 | 64 | 1 | 2 | - | - |
| ocnaddfilter | 2 | 2 | 3 | 3 | 1 | 1 | - | - |
| ocnaddgui | 1 | 2 | 1 | 1 | 1 | 2 | - | - |
| ocnaddhealthmonitoring | 1 | 1 | 1 | 1 | 1 | 1 | - | - |
| ocnaddkafka | 2 | 2 | 24 | 24 | 4 | 4 | - | - |
| ocnadduirouter | 1 | 2 | 1 | 1 | 1 | 2 | - | - |
| zookeeper | 1 | 1 | 1 | 2 | 3 | 3 | - | - |

- **PCF :** PCF Traffic: 15K TPS using two trigger point.

Benchmark Test Results**Traffic Feed Details****Table 4-32 Traffic Feed Details**

| NF | NF Traffic Copy Trigger Points | Traffic Rate | Duration in hours | E2E Traffic Feed Average Latency | E2E Traffic Feed Success Rate |
|--------|---|--------------|-------------------|----------------------------------|-------------------------------|
| OCNADD | NA | 30K MPS | 12 | 33.6ms | Feed: 99.99% |
| PCF | Ingress Gateway (Request) Egress Gateway (Request) | 15K TPS | 12 | NA | 99.99% |

CPU and Memory Utilization

The following table describes the OCNADD CPU and memory utilization:

Table 4-33 OCNADD CPU and Memory Utilization

| Micro-Service/ Container | CPU Utilization (%) | Memory Utilization (%) | Total Replica |
|--------------------------|---------------------|------------------------|---------------|
| httpsfeed-adapter | 51.6 | 62.10 | 3 |
| kafka-broker | 50.8 | 18.10 | 4 |
| ocnaddadminservice | 0.08 | 33.90 | 1 |
| ocnaddalarm | 0.12 | 19.30 | 1 |
| ocnaddconfiguration | 0.09 | 40.70 | 1 |
| ocnaddexport | 0.03 | 2.05 | 1 |
| ocnaddgui | 0.00 | 3.09 | 1 |
| ocnaddhealthmonitoring | 0.13 | 35.70 | 1 |
| ocnaddpcfaggregation | 61.4 | 32.90 | 2 |
| ocnadduirouter | 0.01 | 32.50 | 1 |
| zookeeper | 0.14 | 48.20 | 3 |