

Oracle® Fusion Middleware

Administrator's Guide for Oracle Business Intelligence Publisher
(Oracle Fusion Applications Edition)

Release 11g (11.1.1)

Part No. E20837-01

August 2011

Oracle Fusion Middleware Administrator's Guide for Oracle Business Intelligence Publisher (Oracle Fusion Applications Edition), Release 11g (11.1.1)

Part No. E20837-01

Copyright © 2010, 2011, Oracle and/or its affiliates. All rights reserved.

Primary Author: Leslie Grumbach Studdard

Contributing Author: Trish Fuzesy

Contributor: Oracle Business Intelligence Publisher development, product management, and quality assurance teams

Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this software or related documentation is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS

Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation shall be subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License (December 2007). Oracle USA, Inc., 500 Oracle Parkway, Redwood City, CA 94065.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third party content, products and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third party content, products or services.

Contents

Send Us Your Comments

Preface

Part 1 Introduction

1 Introduction to Oracle BI Publisher Administration

Introduction.....	1-1
Starting and Stopping BI Publisher.....	1-3
About the Administration Page.....	1-5
Flow of Tasks for First Time Setup of BI Publisher.....	1-6
About Integration with Oracle Business Intelligence Enterprise Edition.....	1-7
About the Security Model Options.....	1-8
About the Data Source Connections.....	1-9
About Report Delivery Destinations.....	1-9
About Setting Runtime Configuration Properties.....	1-10
About the Server Configuration Settings.....	1-10

Part 2 Configuring Security

2 Configuring Oracle Fusion Middleware Security Model

Understanding the Security Model.....	2-1
Key Security Elements.....	2-2
Permission Grants and Inheritance.....	2-3
Default Security Configuration.....	2-6

Managing Authentication	2-12
Managing Authorization.....	2-20
Managing Credentials.....	2-28
Customizing the Default Security Configuration.....	2-29
Configuring a New Authentication Provider.....	2-30
Configuring a New Policy Store and Credential Store Provider.....	2-30
Customizing the Policy Store.....	2-31

3 Alternative Security Options

About Alternative Security Options.....	3-1
Understanding BI Publisher's Users, Roles, and Permissions.....	3-2
About Privileges to Use Functionality.....	3-3
About Catalog Permissions.....	3-5
How Functional Privileges and Permissions Work Together.....	3-6
About Access to Data Sources.....	3-7
Configuring Users, Roles, and Data Access.....	3-7
Security and Catalog Organization.....	3-11
Configuring BI Publisher to Use an LDAP Provider.....	3-15
Integrating with Microsoft Active Directory.....	3-21
Configuring Single Sign-On.....	3-24
Configuring BI Publisher to Use Oracle Access Manager (OAM) Single Sign-On.....	3-25
Setting Up Oracle Single Sign-On.....	3-27

4 Other Security Topics

Enabling a Local Superuser.....	4-1
Enabling a Guest User.....	4-2
Configuring BI Publisher for Secure Socket Layer (SSL) Communication.....	4-3
Configuring Proxy Settings.....	4-5

5 Integrating with Other Oracle Security Models

Introduction.....	5-1
Before You Begin: Create a Local Superuser.....	5-1
Integrating with Oracle BI Server Security.....	5-2
Integrating with Oracle E-Business Suite.....	5-4
Integrating with Oracle Database Security.....	5-6
Integrating with Oracle Siebel CRM Security.....	5-9

6 Implementing a Digital Signature

Introduction.....	6-1
-------------------	-----

Prerequisites and Limitations.....	6-2
Implementing a Digital Signature.....	6-4
Running and Signing Reports with a Digital Signature.....	6-7

Part 3 Administering Oracle Business Intelligence Publisher

7 Configuring the Scheduler

Overview.....	7-1
Understanding the BI Publisher Scheduler.....	7-2
Setup Considerations.....	7-4
About the Scheduler Configuration.....	7-5
Configuring Processors and Processor Threads.....	7-6
Adding Managed Servers.....	7-7
Scheduler Diagnostics.....	7-12

8 Configuring Server Properties

Overview.....	8-1
Setting the Path to the Configuration Folder.....	8-1
Configuring the Catalog.....	8-2
Setting General Properties.....	8-3
Setting Server Caching Specifications.....	8-5
Setting Retry Properties for Database Failover.....	8-6

9 Setting Up Data Sources

Overview of Setting Up Data Sources.....	9-1
Setting Up a JDBC Connection to Your Data Source.....	9-5
Setting Up a Database Connection Using a JNDI Connection Pool.....	9-8
Setting Up a Connection to an LDAP Server Data Source.....	9-8
Setting Up a Connection to an OLAP Data Source.....	9-9
Setting Up a Connection to a File Data Source.....	9-10
Viewing or Updating a Data Source.....	9-11

10 Setting Up Integrations

Overview.....	10-1
Configuring Integration with Oracle BI Presentation Services.....	10-1

11 Setting Up Delivery Destinations

Overview.....	11-1
---------------	------

Configuring Delivery Options.....	11-1
Adding a Printer or Fax Server.....	11-3
Adding an E-mail Server.....	11-4
Adding a WebDAV Server.....	11-5
Adding an HTTP Server.....	11-5
Adding an FTP Server.....	11-6
Adding a Common Unix Printing System (CUPS) Server.....	11-7

12 Defining Runtime Configurations

Setting Runtime Properties.....	12-1
PDF Output Properties.....	12-2
PDF Security Properties.....	12-3
PDF Digital Signature Properties.....	12-7
RTF Output Properties.....	12-9
HTML Output Properties.....	12-10
FO Processing Properties.....	12-11
RTF Template Properties.....	12-14
PDF Template Properties.....	12-15
Flash Template Properties.....	12-16
CSV Output Properties.....	12-17
Excel 2007 Output Properties.....	12-18
All Outputs.....	12-18
Defining Font Mappings.....	12-19
Defining Currency Formats.....	12-24

13 Diagnostics and Performance Monitoring in Oracle BI Publisher

Diagnosing and Resolving Issues in Oracle BI Publisher.....	13-1
About Diagnostic Log Files.....	13-2
Configuring Log Files.....	13-4
Viewing Log Messages.....	13-5
About Performance Monitoring and User Auditing.....	13-9
Enabling Monitoring	13-10
Viewing the Audit Log.....	13-15
Configuring an Audit Repository.....	13-15
Using BI Publisher to Create Audit Reports from Your Audit Repository.....	13-21
Viewing Performance Statistics in the MBean Browser.....	13-23

14 Adding Translations for the BI Publisher Catalog and Reports

Introduction.....	14-1
Exporting and Importing a Catalog Translation File.....	14-2

Template Translation.....	14-5
Using the Localized Template Option	14-7

15 Moving Catalog Objects Between Environments

Overview.....	15-1
Preparing to Use the BI Publisher Catalog Utility.....	15-4
Exporting BI Publisher Reporting Objects.....	15-5
Importing BI Publisher Reporting Objects.....	15-7
Generating Translation Files and Checking for Translatability.....	15-9

A Setting Up Print Servers

Print Server Options for BI Publisher.....	A-1
Setting Up CUPS.....	A-1
Setting UP Internet Printing Protocol (IPP) on Windows.....	A-6

B Scheduler Configuration Reference

Introduction.....	B-1
Configuring BI Publisher for ActiveMQ.....	B-1
Manually Configuring the Quartz Scheduler.....	B-2

C Integration Reference for Oracle Business Intelligence Enterprise Edition

About Integration.....	C-1
Configuring BI Publisher to Use the Oracle BI Presentation Catalog	C-2
Configuring Integration with Oracle BI Presentation Services.....	C-2
Setting Up a JDBC Connection to the Oracle BI Server.....	C-3

D Configuration File Reference

BI Publisher Configuration Files	D-1
Setting Properties in the Runtime Configuration File.....	D-1
Structure.....	D-3
Properties.....	D-3
Font Definitions.....	D-4
Predefined Fonts.....	D-7

Index

Send Us Your Comments

Oracle Fusion Middleware Administrator's Guide for Oracle Business Intelligence Publisher (Oracle Fusion Applications Edition), Release 11g (11.1.1)

Part No. E20837-01

Oracle welcomes customers' comments and suggestions on the quality and usefulness of this document. Your feedback is important, and helps us to best meet your needs as a user of our products. For example:

- Are the implementation steps correct and complete?
- Did you understand the context of the procedures?
- Did you find any errors in the information?
- Does the structure of the information help you with your tasks?
- Do you need different information or graphics? If so, where, and in what format?
- Are the examples correct? Do you need more examples?

If you find any errors or have any other suggestions for improvement, then please tell us your name, the name of the company who has licensed our products, the title and part number of the documentation and the chapter, section, and page number (if available).

Note: Before sending us your comments, you might like to check that you have the latest version of the document and if any concerns are already addressed.

Send your comments to us using the electronic mail address: appsdoc_us@oracle.com

Please give your name, address, electronic mail address, and telephone number (optional).

If you need assistance with Oracle software, then please contact your support representative or Oracle Support Services.

If you require training or instruction in using Oracle software, then please contact your Oracle local office and inquire about our Oracle University offerings. A list of Oracle offices is available on our Web site at www.oracle.com.

Preface

Intended Audience

Welcome to Release 11g (11.1.1) of the *Oracle Fusion Middleware Administrator's Guide for Oracle Business Intelligence Publisher (Oracle Fusion Applications Edition)*.

This book is intended for the following users:

Administrators of Oracle BI Publisher

See Related Information Sources on page xii for more Oracle product information.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/us/corporate/accessibility/>

Structure

- 1 Introduction to Oracle BI Publisher Administration**
- 2 Configuring Oracle Fusion Middleware Security Model**
- 3 Alternative Security Options**
- 4 Other Security Topics**
- 5 Integrating with Other Oracle Security Models**
- 6 Implementing a Digital Signature**
- 7 Configuring the Scheduler**
- 8 Configuring Server Properties**
- 9 Setting Up Data Sources**
- 10 Setting Up Integrations**
- 11 Setting Up Delivery Destinations**
- 12 Defining Runtime Configurations**
- 13 Diagnostics and Performance Monitoring in Oracle BI Publisher**
- 14 Adding Translations for the BI Publisher Catalog and Reports**
- 15 Moving Catalog Objects Between Environments**

- A Setting Up Print Servers**
- B Scheduler Configuration Reference**
- C Integration Reference for Oracle Business Intelligence Enterprise Edition**
- D Configuration File Reference**

Related Information Sources

For more information, see the following documents in the Oracle Business Intelligence Enterprise Edition 11g Release 1 (11.1.1) documentation set:

- *Oracle Fusion Middleware Report Designer's Guide for Oracle Business Intelligence Publisher*
- *Oracle Fusion Middleware Java API Reference for Oracle Business Intelligence Publisher*
- The Oracle Business Intelligence chapter in the *Oracle Fusion Middleware Release Notes* for your platform
- *Oracle Fusion Middleware Installation Guide for Oracle Business Intelligence*
- *Oracle Fusion Middleware Upgrade Guide for Oracle Business Intelligence Enterprise Edition*
- *Oracle Fusion Middleware Application Security Guide*
- *Oracle Fusion Middleware System Administrator's Guide for Oracle Business Intelligence Enterprise Edition*
- *Oracle Fusion Middleware Security Guide for Oracle Business Intelligence Enterprise Edition*
- *Oracle Fusion Middleware User's Guide for Oracle Business Intelligence Enterprise Edition*
- *Oracle Fusion Middleware Administrator's Guide*
- *Oracle WebLogic Server Administration Console Online Help*

System Requirements and Certification

Refer to the system requirements and certification documentation for information about hardware and software requirements, platforms, databases, and other information. Both of these documents are available on Oracle Technology Network (OTN).

The system requirements document covers information such as hardware and software requirements, minimum disk space and memory requirements, and required system libraries, packages, or patches:

http://www.oracle.com/technology/software/products/ias/files/fusion_requirements.htm

The certification document covers supported installation types, platforms, operating systems, databases, JDKs, and third-party products:

http://www.oracle.com/technology/software/products/ias/files/fusion_certification.html

Do Not Use Database Tools to Modify Oracle E-Business Suite Data

Oracle **STRONGLY RECOMMENDS** that you never use SQL*Plus, Oracle Data Browser, database triggers, or any other tool to modify Oracle E-Business Suite data unless otherwise instructed.

Oracle provides powerful tools you can use to create, store, change, retrieve, and maintain information in an Oracle database. But if you use Oracle tools such as SQL*Plus to modify Oracle E-Business Suite data, you risk destroying the integrity of your data and you lose the ability to audit changes to your data.

Because Oracle E-Business Suite tables are interrelated, any change you make using an Oracle E-Business Suite form can update many tables at once. But when you modify Oracle E-Business Suite data using anything other than Oracle E-Business Suite, you may change a row in one table without making corresponding changes in related tables. If your tables get out of synchronization with each other, you risk retrieving erroneous information and you risk unpredictable results throughout Oracle E-Business Suite.

When you use Oracle E-Business Suite to modify your data, Oracle E-Business Suite automatically checks that your changes are valid. Oracle E-Business Suite also keeps track of who changes information. If you enter information into database tables using database tools, you may store invalid information. You also lose the ability to track who has changed your information because SQL*Plus and other database tools do not keep a record of changes.

Part 1

Introduction

Introduction to Oracle BI Publisher Administration

This chapter covers the following topics:

- Introduction
- Starting and Stopping BI Publisher
- About the Administration Page
- Flow of Tasks for First Time Setup of BI Publisher
- About Integration with Oracle Business Intelligence Enterprise Edition
- About the Security Model Options
- About the Data Source Connections
- About Report Delivery Destinations
- About Setting Runtime Configuration Properties
- About the Server Configuration Settings

Introduction

Oracle BI Publisher is an enterprise reporting solution for authoring, managing, and delivering all your highly formatted documents, such as operational reports, electronic funds transfer documents, government PDF forms, shipping labels, checks, sales and marketing letters, and much more.

Administering BI Publisher requires setting up and maintaining the following system components:

- BI Publisher security
- Data source connections

- Report delivery destinations
- BI Publisher Scheduler configurations
- Runtime configuration settings
- Server configuration settings

See these other guides for more information about using the product for other business roles:

Role	Sample Tasks	Guide
Data model developer	Fetching and structuring the data to use in reports	<i>Oracle Fusion Middleware Data Modeling Guide for Oracle Business Intelligence Publisher</i>
Application developer or integrator	Integrating BI Publisher into existing applications using the application programming interfaces	<i>Oracle Fusion Middleware Developer's Guide for Oracle Business Intelligence Publisher</i>
Report consumer	Viewing reports Scheduling report jobs Managing report jobs	<i>Oracle Fusion Middleware User's Guide for Oracle Business Intelligence Publisher</i>
Report designer	Creating report definitions Designing layouts	<i>Oracle Fusion Middleware Report Designer's Guide for Oracle Business Intelligence Publisher</i>

Information About Installing, Patching, and Upgrading BI Publisher

The following table provides a quick reference for administration tasks documented in other books:

Topic	Description	Example	For More Information
Installation	Copying new software on a system where no prior installation of the software exists	Installing a new instance of Oracle Business Intelligence 11.1.1.5	See <i>Oracle Fusion Middleware Installation Guide for Oracle Business Intelligence</i>

Topic	Description	Example	For More Information
Patching	Copying a small collection of files over an existing instance (also referred to as an "in-place installation"). A patch is normally associated with a particular version of an Oracle product and involves updating from one minor version of the product to a newer minor version of the same product. A patch set is a single patch that contains a collection of patches designed to be applied together.	Copying the Oracle Business Intelligence 11.1.1.5 patch set over an Oracle Business Intelligence 11.1.1.3 instance	See <i>Oracle Fusion Middleware Patching Guide</i> , especially the section entitled "Summary of the Patch Set Installation Process"
Upgrade	Moving from a previous major version to a new major version	Upgrading from Oracle Business Intelligence Publisher 10g to Oracle Business Intelligence Publisher 11g	See <i>Oracle Fusion Middleware Upgrade Guide for Oracle Business Intelligence Enterprise Edition</i>

Also of interest:

- Oracle Fusion Middleware Enterprise Deployment Guide for Oracle Business Intelligence*

This guide defines an architectural blueprint that captures Oracle's recommended best practices for a highly available and secure Oracle Business Intelligence deployment. The best practices described in this blueprint use Oracle products from across the technology stack, including Oracle Database, Oracle Fusion Middleware, and Oracle Enterprise Manager. The resulting enterprise deployment can be readily scaled out to support increasing capacity requirements.
- Oracle Fusion Middleware High Availability Guide*

This guide discusses the architecture, interaction, and dependencies of Oracle Fusion Middleware components, and explains how they can be deployed in a high availability architecture. (See chapter "Configuring High Availability for Oracle Business Intelligence and EPM.")

Starting and Stopping BI Publisher

Use the Oracle WebLogic Server Administration Console to centrally manage Oracle

Business Intelligence Publisher.

For detailed information about Oracle WebLogic Server, see:

- *Oracle WebLogic Server Administration Console Online Help*
- *Oracle Fusion Middleware Administrator's Guide*

Display Oracle WebLogic Server Administration Console, using one of the following methods:

- Using the Start menu in Windows
- Clicking a link on the Overview page in Fusion Middleware Control
- Entering a URL into a Web browser window

The Oracle WebLogic Server Administration Console is available only if the Administration Server for WebLogic Server is running.

To display Oracle WebLogic Server Administration Console:

1. If the Administration Server for WebLogic Server is not running, start it.
2. Display the Oracle WebLogic Server Administration Console using one of the following methods:

Using the Windows Start menu:

1. From the **Start** menu, select **All Programs**, **Oracle WebLogic**, **User Projects**, **bifoundation_domain**, and **Admin Server Console**.

The Oracle WebLogic Server Administration Console login page is displayed.

Clicking a link on the Overview page in Fusion Middleware Control:

1. Display Oracle Fusion Middleware Control.
2. Expand the WebLogic Domain node and select the bifoundation_domain.
3. Click the Oracle WebLogic Server Administration Console link in the Summary region.

The Oracle WebLogic Server Administration Console login page is displayed.

Using a URL in a Web browser window:

1. Enter the following URL into the browser:

`http://<host>:<port>/console/`

For example, `http://mycomputer:7001/console/`

where host is the DNS name or IP address of the Administration Server and port is the listen port on which the Administration Server is listening for requests (port 7001 by default).


If you have configured a domain-wide Administration port, then use that port number. If you configured the Administration Server to use Secure Socket Layer (SSL), then you must add the letter 's' after http as follows:

https://<host>:7001/console/

Using Oracle WebLogic Server Administration Console to Start and Stop BI Publisher

To use the Oracle WebLogic Server Administration Console to start and stop BI Publisher:

1. Start the Oracle WebLogic Server Administration Console.
2. Under the Domain Structure, expand **Environment**.
3. Click **Servers** to display the **Summary of Servers** table.
4. Click **Control**. Select the server and then click the appropriate action.

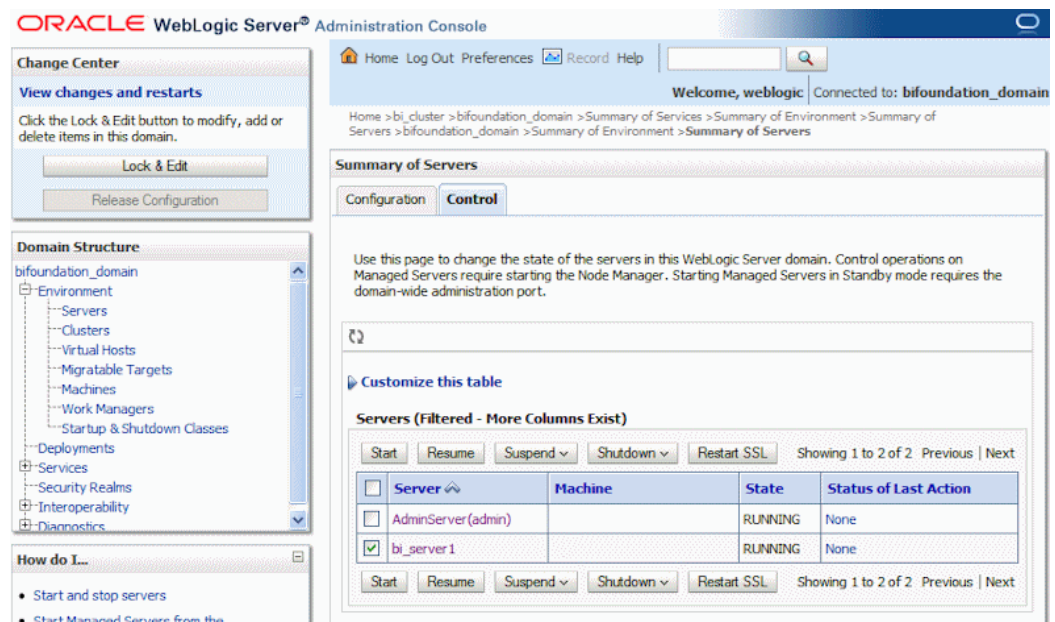

About the Administration Page

Many of the tasks described in the Administration section of this guide are performed from the BI Publisher Administration page. You must be granted Administrator privileges to access the Administration page.

The Administration page is accessed via the Administration link in the global header. The following figure shows the Administration page:



Flow of Tasks for First Time Setup of BI Publisher

Configurations Performed by the Oracle Business Intelligence Platform Installer

After installation is complete, the following will be configured:

- The security model will be configured to use Oracle Fusion Middleware Security
- The scheduler will be configured to use Oracle WebLogic JMS. The schema tables will be installed and configured in the database.
- The BI Publisher catalog and repository will be configured to `${xdo.server.config.dir}/repository`

If you are setting up BI Publisher for the first time, following is the recommended flow of tasks to get your system up and running.

Task	Where to Get Information
Define a Local Superuser Set up this Superuser to ensure access to all administrative functions in case of problems with the current security setup.	Enabling a Local Superuser, page 4-1
Set up your chosen security model and test	Configuring Oracle Fusion Middleware Security Model, page 2-1 Alternative Security Options, page 3-1 Integrating with Other Oracle Security Models, page 5-1
Set up your data sources and test	Setting Up Data Sources, page 9-1
Set up you delivery servers and test	Setting Up Delivery Destinations, page 11-1
Configure server properties	Configuring Server Properties, page 8-1
Configure system runtime properties	Defining Runtime Configurations, page 12-1

About Integration with Oracle Business Intelligence Enterprise Edition

If you installed Oracle BI Publisher with the Oracle Business Intelligence Enterprise Edition you will need to perform the following Administration tasks in the BI Publisher Administration page. Navigate to the BI Publisher Administration page as follows:

In the global header, click **Administration**, on the Administration page, click **Manage BI Publisher**.

Task	Where to Get Information
Set up data source connections for reporting	Setting Up Data Sources, page 9-1
Grant access to data sources for user roles defined in Oracle Business Intelligence	Granting Data Access, page 3-11
Configure the connections to delivery servers (for example, printers, e-mail servers, FTP servers, and so on)	Setting Up Delivery Destinations, page 11-1

Task	Where to Get Information
Configure the scheduler processors	Configuring the Scheduler, page 7-1
Configure system runtime properties such as PDF security properties, properties specific to each output format, template type properties, font mappings, and currency formats.	Defining Runtime Configurations, page 12-1
Configure server properties such as caching specifications, database failover properties, and database fetch size.	Configuring Server Properties, page 8-1

About the Security Model Options

BI Publisher offers the following security options:

- Oracle Fusion Middleware Security

After installation, BI Publisher will be configured to use Oracle Fusion Middleware Security. For more information, see *Configuring Oracle Fusion Middleware Security Model*, page 2-1. If you prefer to use another security model, choose from the alternative options.
- BI Publisher Security

Use BI Publisher's Users and Roles paradigm to control access to reports and data sources. For more information see *Alternative Security Options*, page 3-1.
- Integration with an LDAP server

Set up the BI Publisher roles in your LDAP server then configure BI Publisher to integrate with it. For more information see *Alternative Security Options*, page 3-1.
- Oracle E-Business Suite

Upload a DBC file to recognize your Oracle E-Business Suite users. For more information see *Integrating with Other Oracle Security Models*, page 5-1.
- Oracle BI Server

You can still leverage the 10g legacy BI Server authentication method if you choose not to upgrade to Oracle Fusion Middleware Security. For more information see *Integrating with Other Oracle Security Models*, page 5-1.
- Oracle Database

Set up the BI Publisher roles in your Oracle Database and then configure BI Publisher to integrate with it. For more information see *Integrating with Other Oracle Security Models*, page 5-1.

- Oracle Siebel CRM Security Model

For more information, see *Integrating with Other Oracle Security Models*, page 5-1.

About the Data Source Connections

BI Publisher reports rely on XML data. BI Publisher supports retrieving data from a variety of data sources.

The following data sources must be first set up in BI Publisher through the Administration page:

- Database connections

BI Publisher supports direct JDBC connections and connections through a JNDI pool (recommended)

- LDAP connections
- OLAP connections
- File directory connections - you can use an existing XML file or Microsoft Excel file that is stored in a directory that BI Publisher can access

For more information on setting up these data source connections, see *Setting Up Data Sources*, page 9-1.

The following data sources are defined when you create the data model:

- Web services
- HTTP XML feed

If you have integrated your system with Oracle Business Intelligence you can also take advantage of the following data source:

- Oracle BI Analysis

About Report Delivery Destinations

The BI Publisher delivery manager supports the following delivery channels:

- Printer

- Fax
- E-mail
- HTTP notification
- FTP
- Web Folder (or WebDAV)

For more information on setting up the delivery options, see *Setting Up Delivery Options*, page 11-1.

About Setting Runtime Configuration Properties

Use the Runtime Configuration page to enable configuration settings for your system. The properties include settings that

- control the processing for different output types
- enable digital signature
- tune for scalability and performance
- define font mappings

For more information on setting configuration properties and font mappings, see *Setting Runtime Properties*, page 12-1.

About the Server Configuration Settings

BI Publisher administration also includes a set of system maintenance settings and tasks. These are:

- configuring the catalog
- setting caching properties
- setting retry properties for failover

For more information on these tasks and settings, see *Configuring Server Properties*, page 8-1.

Part 2

Configuring Security

Configuring Oracle Fusion Middleware Security Model

This chapter covers the following topics:

- Understanding the Security Model
- Managing Authentication
- Managing Authorization
- Managing Credentials
- Customizing the Default Security Configuration

Understanding the Security Model

The Oracle Fusion Middleware security model is built upon the Oracle Fusion Middleware platform, which incorporates the Java security model. The Java model is a role-based, declarative model that employs container-managed security where resources are protected by roles that are assigned to users. However, extensive knowledge of the Java-based architecture is unnecessary when using the Oracle Fusion Middleware Security model. When using this security model, BI Publisher can furnish uniform security and identity management across the enterprise.

After installation BI Publisher is automatically installed into a Oracle WebLogic Server domain, which is a logically related group of WebLogic Server resources that are managed as a unit. After a Simple installation type the WebLogic Server domain that is created is named **bifoundation_domain**. This name may vary depending upon the installation type performed. One instance of WebLogic Server in each domain is configured as an Administration Server. The Administration Server provides a central point for managing a WebLogic Server domain. The Administration Server hosts the Administration Console, which is a Web application accessible from any supported Web browser with network access to the Administration Server. BI Publisher is part of the active security realm configured for the Oracle WebLogic Server domain into which it is installed.

For more information about the Oracle Fusion Middleware platform and the common security framework, see *Oracle Fusion Middleware Application Security Guide*. For more information about managing the Oracle WebLogic Server domain and security realm, see *Oracle Fusion Middleware Understanding Security for Oracle WebLogic Server* and *Oracle Fusion Middleware Securing Oracle WebLogic Server*.

Key Security Elements

The Oracle Fusion Middleware security model depends upon the following key elements in order to provide uniform security and identity management across the enterprise:

- **Application policy**

BI Publisher permissions are granted to members of its application roles. In the default security configuration, each application role conveys a predefined set of permissions. Permission grants are defined and managed in an **application policy**. After an application role is associated with an application policy, that role becomes a **Grantee** of the policy. An application policy is specific to a particular application.

- **Application role**

After permission grants are defined in an application policy, an application role can be mapped to that policy, and the application role then becomes the mechanism to convey the permissions. In this manner an **application role** becomes the container that grants permissions to its members. The permissions become associated with the application role through the relationship between *policy* and *role*. After groups are mapped to an application role, the corresponding permissions are granted to all members equally. Membership is defined in the application role definition. Application roles are assigned in accordance with specific conditions and are granted dynamically based on the conditions present at the time authentication occurs. More than one user or group can be members of the same application role.

- **Authentication provider**

An **authentication provider** is used to access user and group information and is responsible for authenticating users. The default authentication provider that BI Publisher uses during a Simple or Enterprise installation is named DefaultAuthenticator. This is the same default authenticator used by a basic Oracle WebLogic Server installation. An Oracle WebLogic Server authentication provider enables you to manage users and groups in one place.

An **identity store** contains user name, password, and group membership information. An authentication provider accesses the data in the identity store and authenticates against it. For example, when a user name and password combination is entered at log in, the authentication provider searches the identity store to verify the credentials provided. The BI Publisher default authentication provider authenticates against Oracle WebLogic Server embedded directory server.

- **Users and groups**

A **user** is an entity that can be authenticated. A user can be a person, such as an application user, or a software entity, such as a client application. Every user is given a unique identifier.

Groups are organized collections of users that have something in common. Users should be organized into groups with similar access needs in order to facilitate efficient security management.

- **Security realm**

During installation an Oracle WebLogic Server domain is created and BI Publisher is installed into that domain. BI Publisher security is managed within the **security realm** for this Oracle WebLogic Server domain. A security realm acts as a scoping mechanism. Each security realm consists of a set of configured security providers, users, groups, security roles, and security policies. Only one security realm can be active for the domain. BI Publisher authentication is performed by the authentication provider configured for the default security realm for the WebLogic Server domain in which it is installed. Oracle WebLogic Server Administration Console is the administration tool used for managing an Oracle WebLogic Server domain.

Permission Grants and Inheritance

BI Publisher provides application-specific permissions for accessing different features. BI Publisher permissions are typically granted by becoming a member in an application role. Permissions can be granted two ways: through membership in an application role (direct) and through group and role hierarchies (inheritance). Application role membership can be inherited by nature of the application role hierarchy. In the default security configuration, each application role is preconfigured to grant a predefined set of permissions. Groups are mapped to an application role. The mapping of a group to a role conveys the role's permissions to all members of the group. In short, permissions are granted in BI Publisher by establishing the following relationships:

- A group defines a set of users having similar system access requirements. Users are added as members to one or more groups according to the level of access required.
- Application roles are defined to represent the role a user typically performs when using BI Publisher. The default security configuration provides the following preconfigured application roles: BIAdministrator (an administrator), BIAuthor (an author of content), and BIConsumer (a consumer of content).
- The groups of users are mapped to one or more application roles that match the type of access required by the population.
- Application policies are created and BI Publisher permissions are mapped that grant a set of access rights corresponding to role type.

- An application role is mapped to the application policy that grants the set of permissions required by the role type (an administrator, an author, a consumer).
- Group membership can be inherited by nature of the group hierarchy. Application roles mapped to inherited groups are also inherited, and those permissions are likewise conveyed to the members.

How a user's permissions are determined by the system is as follows:

1. A user enters credentials into a Web browser at login. The user credentials are authenticated by the authentication provider against data contained the identity store.
2. After successful authentication, a Java subject and principal combination is issued, which is populated with the user name and a user's groups.
3. A list of the user's groups is generated and checked against the application roles. A list is created of the application roles that are mapped to each of the user's groups.
4. A user's permission grants are determined from knowing which application roles the user is a member of. The list of groups is generated only to determine what roles a user has, and is not used for any other purpose.


A user can also be granted permissions if they inherit other application roles. Members of application roles can include other groups and application roles. The result is a hierarchical role structure where permissions can be *inherited* in addition to being *explicitly granted*. This hierarchy provides that a group is granted the permissions of the application role for which it is a member, and the permissions granted by all roles *descended* from that role.

For example, the default security configuration includes several predefined groups and application roles. The default BIAdministrator application role includes the BIAdministrators group, the BIAuthor application role includes the BIAuthors group, and the BIConsumer application role includes the BIConsumers group. The default BIAdministrator application role is a member the BIAuthor application role, and the BIAuthor application role is a member of the BIConsumer application role. The members of these application roles inherit permissions as follows. Members of the BIAdministrators group are granted all the permissions of the BIAdministrator role, the BIAuthor role, and the BIConsumer role. By nature of this role hierarchy, the user who is a member of a particular group is granted permissions both explicitly and through inheritance. For more information about the default application roles and groups, see Default Application Roles and Permissions., page 2-9

Note: By themselves, groups and group hierarchies do not enable any privilege to access resources controlled by an application. Privileges are conveyed by the permission grants defined in an application policy. A

user, group, or application role becomes a Grantee of the application policy. The application policy Grantee conveys the permissions and this is done by direct association (user) or by becoming a member of the Grantee (group or application role).

The following figure shows these relationships between the default groups and application roles.

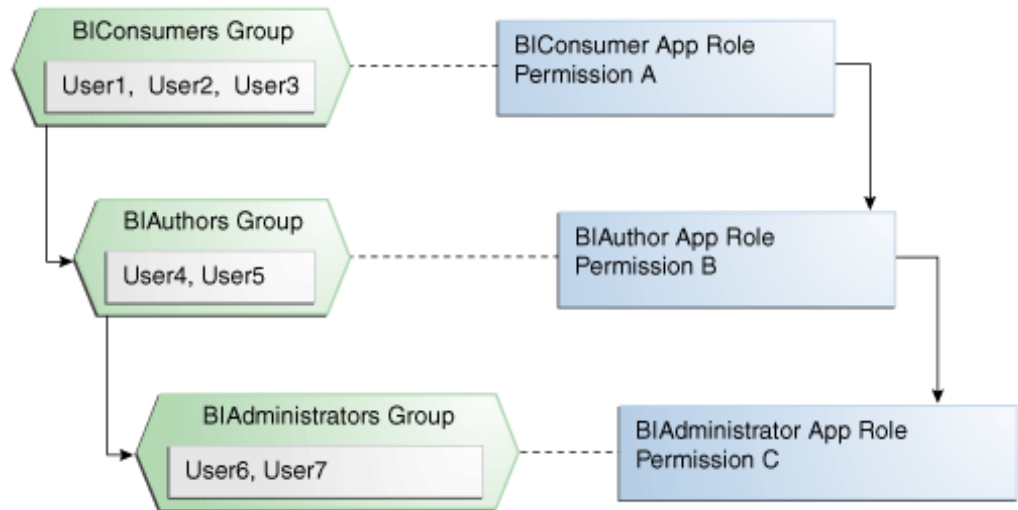

The following table summarizes how permissions are granted explicitly or are inherited in the previous example and figure.

Permissions Granted by the Role Hierarchy Example

User Name	Group Membership: Explicit/Inherited	Application Role Membership: Explicit/Inherited	Permission Grants: Explicit/Inherited
User1, User2, User3	BIConsumers: Explicit	BIConsumer: Explicit	Permission A: Explicit
User4, User5	BIAuthors: Explicit	BIAuthor: Explicit	Permission B: Explicit
	BIConsumers: Inherited	BIConsumer: Inherited	Permission A: Inherited
User6, User7	BIAAdministrators: Explicit	BIAAdministrator: Explicit	Permission C: Explicit
	BIAuthors: Inherited	BIAuthor: Inherited	Permission B: Inherited
	BIConsumers: Inherited	BIConsumer: Inherited	Permission A: Inherited

Default Security Configuration

Access control of system resources is achieved by requiring users to authenticate at login and by restricting users to only those resources for which they are authorized. A default security configuration is available for immediate use after BI Publisher is installed and is configured to use the Oracle Fusion Middleware security model. BI Publisher is installed into the Oracle WebLogic Server domain and uses its security realm. The default configuration includes three predefined security stores available for managing user identities, credentials, and BI Publisher-specific permission grants. Users can be added to predefined groups that are mapped to preconfigured application roles. Each application role is preconfigured to grant specific BI Publisher permissions.

The BI Publisher default security stores are configured as follows during installation.

Store Name	Purpose	Default Provider	Options
Identity store	<ul style="list-style-type: none"> Used to control authentication. Stores the users and groups, and the users group for Oracle WebLogic Server embedded directory server. 	<ul style="list-style-type: none"> Oracle WebLogic Server embedded directory server. Managed with Oracle WebLogic Server Administration Console. 	BI Publisher can be reconfigured to use alternative authentication providers. For a complete list, see <i>System Requirements and Supported Platforms for Oracle Fusion Middleware 11gR1</i> .
Policy store	<ul style="list-style-type: none"> Used to control authorization. Stores the application role definitions and the mapping definitions between groups and application roles. 	<ul style="list-style-type: none"> system.jazn-data.xml file. Default installation location is MW_HOME/user_projects/domain/<i>your_domain</i>/config/fmwconfig Managed with Oracle Enterprise Manager Fusion Middleware Control. 	BI Publisher can be reconfigured to use Oracle Internet Directory as the policy store provider.
Credential store	Stores the passwords and other security-related credentials either supplied or system-generated.	<ul style="list-style-type: none"> cwallet.sso file. Managed using Fusion Middleware Control. 	BI Publisher can be reconfigured to use Oracle Internet Directory as the credential store provider.

Default Users and Groups

The following table lists the default user names and passwords added to the BI Publisher identity store provider after installation. These defaults can be changed to different values and additional users can be added to the identity store by an administrative user using Oracle WebLogic Server Administration Console.

Default User Name and Password	Purpose	Description
Name: <i>administrator user</i> Password: <i>user supplied</i>	Is the administrative user.	<ul style="list-style-type: none">• This user name is entered by the person performing the installation, it can be any desired name, and does not need to be named Administrator.• The password entered during installation can be changed later using the administration interface for the identity store provider.• This single administrative user is shared by BI Publisher and Oracle WebLogic Server. This user is automatically made a member of the Oracle WebLogic Server default Administrators group after installation. This enables this user to perform all Oracle WebLogic Server administration tasks, including the ability to manage Oracle WebLogic Server's embedded directory server.

Default User Name and Password	Purpose	Description
<p>Name: BISystemUser</p> <p>Password: <i>system generated</i></p>	<ul style="list-style-type: none"> A fixed user created during installation for trusted communication between components when using Oracle BI Analysis as a data source for your BI Publisher Data Model. If you are integrating BI Publisher with Oracle Business Intelligence Enterprise Edition, the recommendation is to use this default user name for trusted communication with Oracle BI Presentation Services. This is the default configuration automatically configured during installation. 	<p>Important: This is a highly privileged user whose credentials should be protected from non-administrative users.</p> <ul style="list-style-type: none"> Using a separate trusted system account for secure inter-component communication enables you to change the password for the system administrator account without affecting communication between components. The name of this user can be changed or a different user can be created for the purpose of inter-component communication.

The following table lists the default group names and group members added to the identity store provider during installation. These defaults can be changed to different values and additional group names can be added by an administrative user using Oracle WebLogic Server Administration Console.

Default Group Name and Members	Purpose	Description
<p>Name: BIAdministrators</p> <p>Members: Any <i>administrator user</i></p>	<p>Contains the BI Publisher administrative users.</p>	<ul style="list-style-type: none"> Members of the BIAdministrators group are granted administrative permissions because this group is mapped to the BIAdministrator application role at installation. All users requiring administrative permissions should be added to the BIAdministrators group when using the default security configuration.
<p>Name: BIAuthors</p> <p>Members: BIAdministrators group</p>	<p>Contains the BI Publisher authors.</p>	<p>Members of the BIAuthors group have the permissions necessary to create content for other users to use, or to consume.</p>
<p>Name: BIConsumers</p> <p>Members: BIAuthors group and Oracle WebLogic Server LDAP server users group.</p>	<p>Contains the BI Publisher consumers.</p>	<ul style="list-style-type: none"> Members of the BIConsumers group have the permissions necessary to use, or consume, content created by other users. The BIConsumers group represents all users that have been authenticated by BI Publisher. By default, every authenticated user is automatically added to this group. Oracle WebLogic Server LDAP server users group members have the permissions necessary to log in to and use Oracle WebLogic Server Administration Console.

Default Application Roles and Permissions

The following table lists the BI Publisher permissions and the application role that

grants these permissions. This mapping exists in the default policy store.

Note: The following table lists the permissions explicitly granted by membership in the corresponding default application role. Permissions can also be inherited as a result of group and application role hierarchies. For more information about permission inheritance, see *Permission Grants and Inheritance*, page 2-3.

BI Publisher Permission	Description	Default Application Role Granting Permission Explicitly
oracle.bi.publisher.administerServer	Enables the Administration link to access the Administration page and grants permission to set any of the system settings.	BIAdministrator
	Important: See <i>Granting the BIAdministrator Role Catalog Permissions</i> , page 2-11 for additional steps required to grant the BIAdministrator permissions on Shared Folders.	
oracle.bi.publisher.developDataModel	Grants permission to create or edit data models.	BIAuthor
oracle.bi.publisher.developReport	Grants permission to create or edit reports, style templates, and sub templates. This permission also enables connection to the BI Publisher server from the Template Builder.	BIAuthor
oracle.bi.publisher.runReportOnline	Grants permission to open (execute) reports and view the generated document in the report viewer.	BIConsumer
oracle.bi.publisher.scheduleReport	Grants permission to create or edit jobs and also to manage and browse jobs.	BIConsumer
oracle.bi.publisher.accessReportOutput	Grants permission to browse and manage job history and output.	BIConsumer

BI Publisher Permission	Description	Default Application Role Granting Permission Explicitly
oracle.bi.publisher.accessExcelReportAnalyzer	Grants permission to download the Analyzer for Excel and to download data from a report to Excel using the Analyzer for Excel. Note that to enable a user to upload an Analyzer for Excel template back to the report definition, the permission oracle.bi.publisher.developReport must also be granted.	BICConsumer
oracle.bi.publisher.accessOnlineReportAnalyzer	Grants permission to launch the Analyzer and manipulate the data. Note that to save an Analyzer template to a report definition, the permission oracle.bi.publisher.developReport must also be granted.	BICConsumer
BICConsumer permissions granted implicitly	The authenticated role is a member of the BICConsumer role by default and, as such, all authenticated role members are granted the permissions of the BICConsumer role implicitly.	Authenticated Role

The **authenticated role** is a special application role provided by the Oracle Fusion Middleware security model and is made available to any application deploying this security model. BI Publisher uses the authenticated application role to grant permissions implicitly derived by the role and group hierarchy of which the authenticated role is a member. The authenticated role is a member of the BICConsumer role by default and, as such, all authenticated role members are granted the permissions of the BICConsumer role implicitly. By default, every authenticated user is automatically added to the BICConsumers group. The authenticated role is not stored in the **obi** application stripe and is not searchable in the BI Publisher policy store. However, the authenticated role will appear in the administrative interface for the policy store, is available in application role lists, and can be added as a member of another application role. You can map the authenticated role to another user, group, or application role, but you cannot remove the authenticated role itself. Removal of the authenticated role would result in the inability to log into the system and this right would need to be granted explicitly.

For more information about the Oracle Fusion Middleware security model and the authenticated role, see *Oracle Fusion Middleware Application Security Guide*.

Granting the BIAdministrator Role Catalog Permissions

The BIAdministrator role is granted only Read permissions on the catalog by default. This means that before a BIAdministrator can manage Shared Folders the BIAdministrator role must grant to the BIAdministrator role Write and Delete

permissions on the Shared Folders node. See *Granting Catalog Permissions*, page 3-8 for a detailed description of granting permissions in the catalog.

Managing Authentication

Authentication is the process of verifying identity by confirming the user is who she claims to be. Oracle WebLogic Server embedded directory server is the authentication provider for the default security configuration. Users, groups, and passwords are managed using Oracle WebLogic Server Administration Console. It is fine to use the default authentication provider for a development or test environment. In a production environment, best practice is to use a full featured authentication provider.

Note: Refer to the system requirements and certification documentation for information about hardware and software requirements, platforms, databases, and other information. These documents are available on Oracle Technology Network (OTN).

During installation an Oracle WebLogic Server domain is created. BI Publisher is installed into that domain and uses the Oracle WebLogic Server security realm. The security realm can have multiple authentication providers configured but only one provider can be active at a time. The order of providers in the list determines priority. The effect of having multiple authentication providers defined in a security realm is not cumulative; rather, the first provider in list is the source for all user and password data needed during authentication. This enables you to switch between authentication providers as needed. For example, if you have separate LDAP servers for your development and production environments, you can change which directory server is used for authentication by re-ordering them in the Administration Console. For information about how to configure a different authentication provider, see *Configuring a New Authentication Provider*, page 2-30.

Detailed information about managing an authentication provider in Oracle WebLogic Server is available in its online help. For more information, log in to Oracle WebLogic Server Administration Console and launch *Oracle Fusion Middleware Oracle WebLogic Server Administration Console Online Help*.


Accessing Oracle WebLogic Server Administration Console

Oracle WebLogic Server is automatically installed and serves as the default administration server. The Administration Console is browser-based and is used to manage the embedded directory server that is configured as the default authenticator. It is launched by entering its URL into a web browser. The default URL takes the following form: `http://hostname:port_number/console`. The port number is the number of the administration server. By default, the port number is 7001.

To launch the Oracle WebLogic Server Administration Console:

1. Log into Oracle WebLogic Server by entering its URL into a Web browser.


For example, `http://hostname:7001/console`. The Administration Console login page displays.

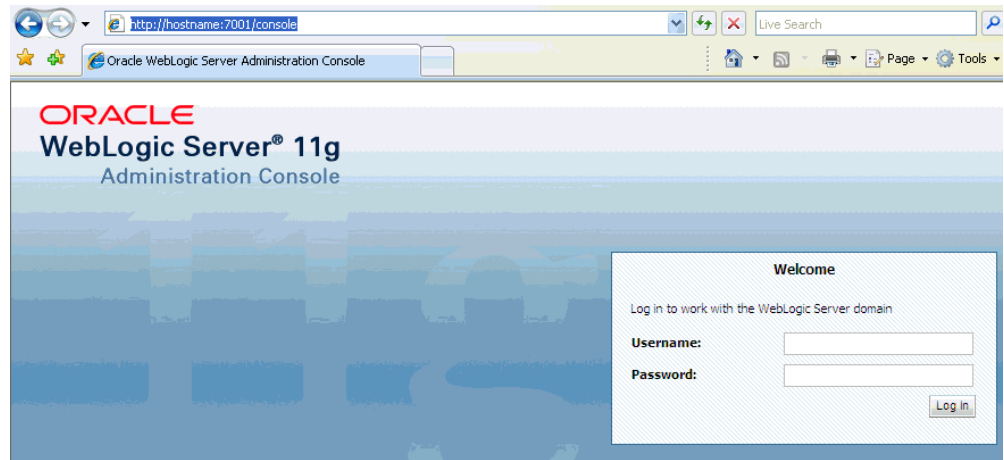

2. Log in using the BI Publisher administrative user and password and click **Login**.

The password is the one you supplied during the installation of BI Publisher. If these values have been changed, then use the current administrative user name and password combination.

The Administration Console displays.

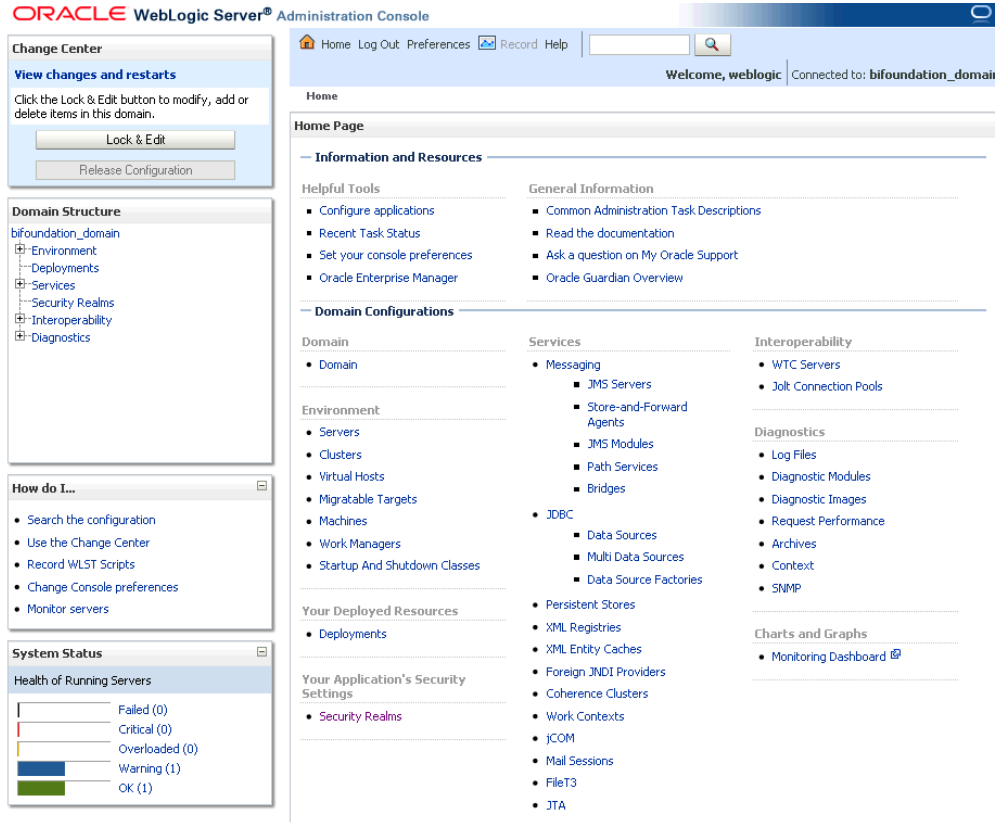


Managing Users and Groups Using the Default Authentication Provider

Managing a group is more efficient than managing a large number of users individually. Best practice is to first organize all BI Publisher users into groups that have similar system access requirements. These groups can then be mapped to application roles that provide the correct level of access. If system access requirements change, then you need only modify the permissions granted by the application roles, or create a new application roles with appropriate permissions. Once your groups are established, continue to add or remove users directly in the identity store using its administration interface as you normally would.

To create a user in the default directory server:

1. If needed, launch Oracle WebLogic Server Administration Console.
For more information, see *Accessing Oracle WebLogic Server Administration Console*, page 2-12
2. Log in as an administrative user.
3. In the Administration Console, select **Security Realms** from the left pane and click the realm you are configuring. For example, **myrealm**.

4. Select **Users and Groups** tab, then **Users**. Click **New**.

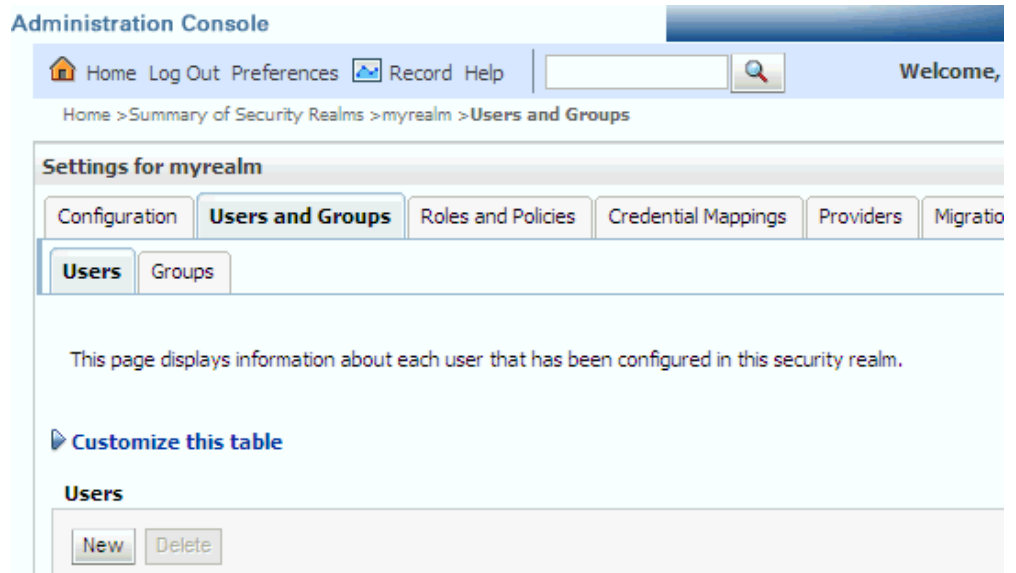

5. In the **Create a New User** page provide the following information:
 - **Name:** Enter the name of the user. See online help for a list of invalid characters.
 - (Optional) **Description:** Enter a description.
 - **Provider:** Select the authentication provider from the list that corresponds to where the user information is contained. DefaultAuthenticator is the name for the default authentication provider.
 - **Password:** Enter a password for the user that is at least 8 characters long.
 - **Confirm Password:** Re-enter the user password.

Administration Console

Home Log Out Preferences Record Help Welcome, weblogic Connected to: bifoundation_

Home > Summary of Security Realms > myrealm > Users and Groups

Create a New User

OK Cancel

User Properties

The following properties will be used to identify your new User.
* Indicates required fields

What would you like to name your new User?

* **Name:**

How would you like to describe the new User?

Description:

Please choose a provider for the user.

Provider:

The password is associated with the login name for the new User.

* **Password:**

* **Confirm Password:**

OK Cancel

6. Click **OK**.

The user name is added to the User table.

To create a group in the default directory server:

1. If needed, launch Oracle WebLogic Server Administration Console.
For more information, see *Accessing Oracle WebLogic Server Administration Console*, page 2-12.
2. Log in as an administrative user.
3. In the Administration Console, select **Security Realm** from the left pane and click the realm you are configuring. For example, **myrealm**.
4. Select **Users and Groups** tab, then **Groups**. Click **New**.
5. In the **Create a New Group** page provide the following information:
 - **Name:** Enter the name of the Group. Group names are case insensitive but must be unique. See online help for a list of invalid characters.

- (Optional) **Description:** Enter a description.
 - **Provider:** Select the authentication provider from the list that corresponds to where the group information is contained. DefaultAuthenticator is the name for the default authentication provider.
6. Click **OK**.

The group name is added to the Group table.

To add a user to a group in the default directory server:

1. If needed, launch Oracle WebLogic Server Administration Console.
For more information, see Accessing Oracle WebLogic Server Administration Console, page 2-12.
2. Log in as an administrative user.
3. In the Administration Console, select **Security Realm** from the left pane and click the realm you are configuring. For example, **myrealm**.
4. Select **Users and Groups** tab, then **Users**. Select the user from **Name**.

Administration Console

Home Log Out Preferences Record Help Welcome, weblogic Connected to: bifoundation_domai

Home > Summary of Security Realms > myrealm > Users and Groups

Messages

✔ User created successfully

Settings for myrealm

Configuration **Users and Groups** Roles and Policies Credential Mappings Providers Migration

Users Groups

This page displays information about each user that has been configured in this security realm.

Customize this table


Users

New Delete Showing 1 to 7 of 7 Previous | Next

<input type="checkbox"/>	Name ↕	Description	Provider
<input type="checkbox"/>	bip_adm		DefaultAuthenticator
<input type="checkbox"/>	bip_dev		DefaultAuthenticator
<input type="checkbox"/>	bip_sch		DefaultAuthenticator
<input type="checkbox"/>	BISystemUser	BI System User	DefaultAuthenticator
<input checked="" type="checkbox"/>	Danny Developer	Report Developer	DefaultAuthenticator
<input type="checkbox"/>	OracleSystemUser	Oracle application software system user.	DefaultAuthenticator
<input type="checkbox"/>	weblogic		DefaultAuthenticator

New Delete Showing 1 to 7 of 7 Previous | Next

- From the **Settings** page, select the **Groups** tab to display the list of available groups.
- Select one or more groups from the **Available** list and use the shuttle controls to move them to the **Chosen** list.

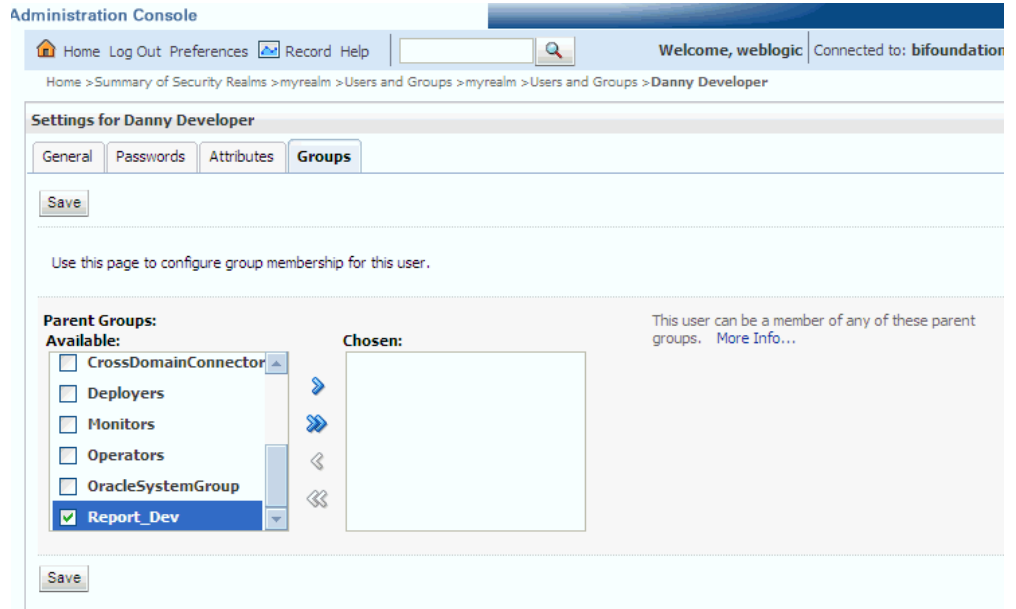


7. Click **Save**.

The user is added to the group.

To change a user password in the default directory server:

1. If needed, launch Oracle WebLogic Server Administration Console.
For more information, see *Accessing Oracle WebLogic Server Administration Console*, page 2-12.
2. Log in as an administrative user.
3. In the Administration Console, select **Security Realms** from the left pane and click the realm you are configuring. For example, **myrealm**.
4. Select **Users and Groups** tab, then **Users**.
5. In the Users table select the user you want to change the password for.
The settings page for the user displays.

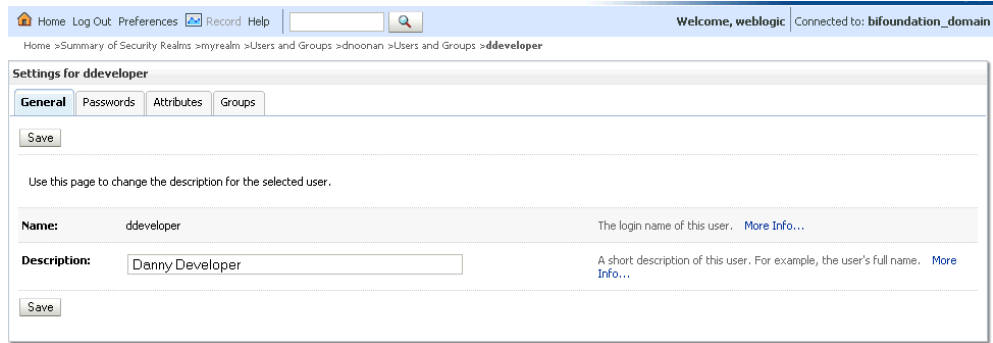

6. Select the Passwords tab and enter the password in the **New Password** and **Confirm Password** fields.
7. Click **Save**.

Managing Authorization

After a user is authenticated, further access to BI Publisher resources is controlled by the granting of permissions, also known as authorization. The policy store contains the system and application-specific policies and roles required for BI Publisher. A policy store can be file-based or LDAP-based and holds the mapping definitions between the default BI Publisher application roles, permissions, users and groups. BI Publisher permissions are granted by mapping users and groups from the identity store to application roles and permission grants located in the policy store. These mapping definitions between users and groups (identity store) and the application roles (policy store) are also kept in the policy store.

Important: Best practice is to map groups instead of individual users to application roles. Controlling membership in a group reduces the complexity of tracking access rights for multiple individual users. Group membership is controlled in the identity store.

The system-jazn-data.xml file is installed and configured as the default policy store. You can continue to use the default store and modify it as needed for your environment, or you can migrate its data to an LDAP-based provider. Oracle Internet Directory is the supported LDAP server in this release.

The policy store and credential store must be of the same type in your environment. That is, both must be either file-based or LDAP-based.

Permissions must be defined in a manner that BI Publisher understands. All valid BI Publisher permissions are premapped to application policies, which are in turn premapped to the default application roles. You cannot create new permissions in the policy store. However, you can customize the default application policy permission

grants and application role mappings as well as create your own.

For more information about the default BI Publisher permissions grants, see *Default Application Roles and Permissions.*, page 2-9. For more information about customizing application roles and permission grants, see *Customizing the Policy Store*, page 2-31

Accessing Oracle Enterprise Manager Fusion Middleware Control

Fusion Middleware Control is a Web browser-based, graphical user interface that you can use to monitor and administer a farm. A farm is a collection of components managed by Fusion Middleware Control. It can contain Oracle WebLogic Server domains, one Administration Server, one or more Managed Servers, clusters, and the Oracle Fusion Middleware components that are installed, configured, and running in the domain. During installation an Oracle WebLogic domain is created and BI Publisher is installed into that domain. If you performed a Simple or Enterprise installation type, this domain is named **bifoundation_domain** and is located within the WebLogic Domain in the Fusion Middleware Control target navigation pane.


Launch Fusion Middleware Control by entering its URL into a Web browser. The URL includes the name of the host and the administration port number assigned during the installation. This URL takes the following form: `http://hostname:port_number/em`. The default port is 7001. For more information about using Fusion Middleware Control, see *Oracle Fusion Middleware Administrator's Guide*.

To display the Security menu in Fusion Middleware Control:


1. Log into Oracle Enterprise Manager Fusion Middleware Control by entering the URL in a Web browser.

For example, `http://hostname:7001/em`.


The Fusion Middleware Control login page displays.

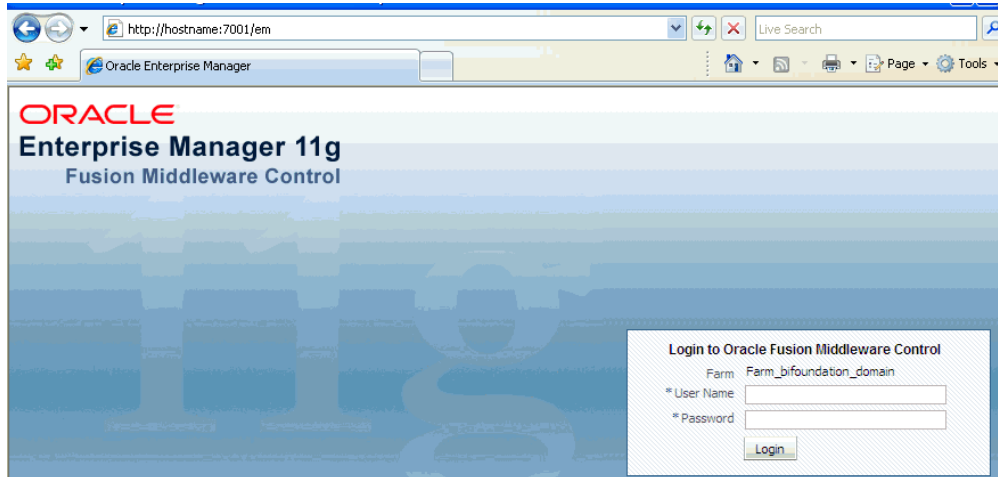

2. Enter the BI Publisher administrative user name and password and click **Login**.
The password is the one you supplied during the installation of BI Publisher. If these values have been changed, then use the current administrative user name and password combination.
3. From the target navigation pane, open **WebLogic Domain** to display **bifoundation_domain**. Display the **Security** menu by selecting one of the following methods:
 - Right-click **bifoundation_domain** to display the **Security** menu. Select **Security** to display a submenu.

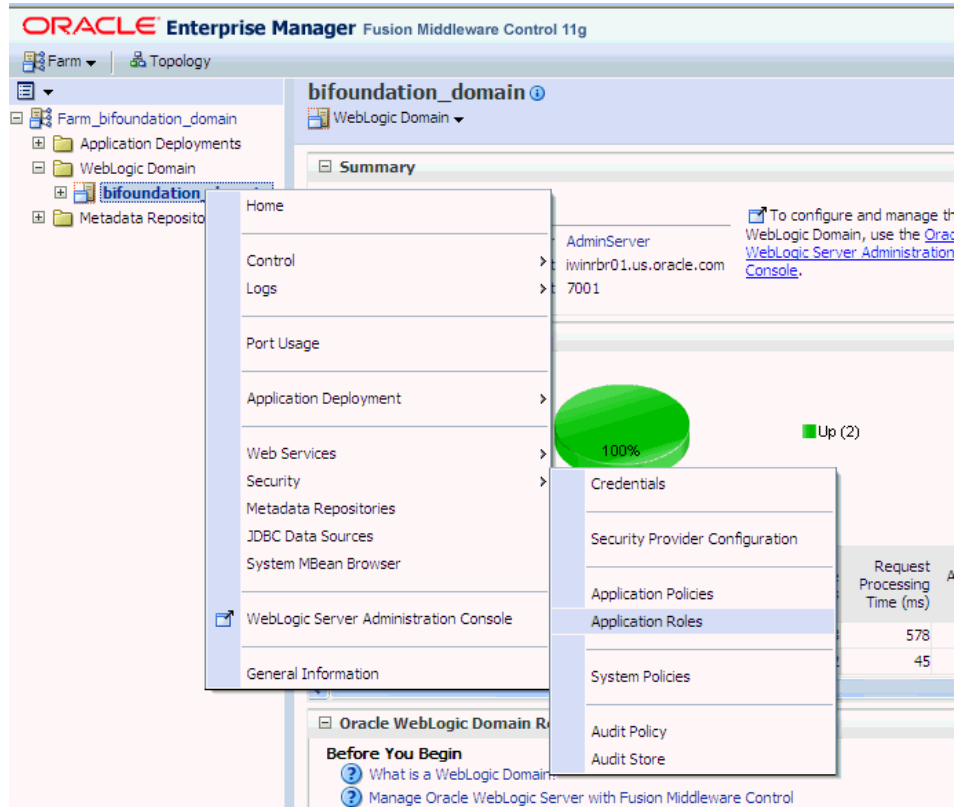

- From the content pane, display the **WebLogic Domain** menu and select **Security**. Select **Security** to display a submenu.

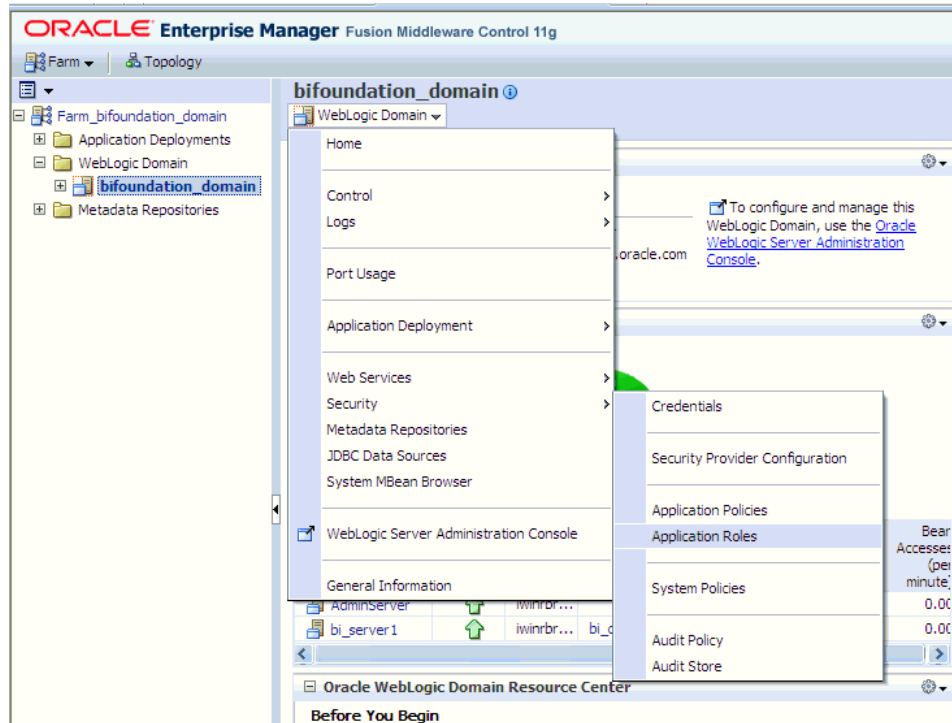

Managing the Policy Store Using Fusion Middleware Control

Use Fusion Middleware Control to manage the BI Publisher application policies and application roles maintained in the policy store whether it is file-based or LDAP-based. For more information about configuring an LDAP-based policy store, see *Configuring a New Policy Store and Credential Store Provider*, page 2-30.

Caution: Oracle recommends you make a copy of the original system-jazn-data.xml policy file and place it in a safe location. Use the copy of the original file to restore the default policy store configuration, if needed. Changes to the default security configuration may lead to an unwanted state. The default installation location is `MW_HOME/user_projects/domain/your_domain/config/fmwconfig`.

The following are common policy store management tasks:

- Modifying the membership of an application role. For more information, see *Modifying Membership in an Application Role*, page 2-25.
- Modifying the permission grants for an application role. For more information, see *Changing Permission Grants for an Application Role*, page 2-39.

- Creating a new application role from the beginning. For more information, see *Creating Application Roles Using Fusion Middleware Control*, page 2-31.
- Creating a new application role based on an existing application role. For more information, see *Creating Application Roles Using Fusion Middleware Control*, page 2-31.

Modifying Application Roles Using Fusion Middleware Control

Members can be added or deleted from an application role using Fusion Middleware Control. You must perform these tasks while in the WebLogic Domain that BI Publisher is installed in. For example, `bifoundation_domain`.

Caution: Be very careful when changing the permission grants and membership for the default application roles. Changes could result in an unusable system.

Modifying Membership in an Application Role


Valid members of an application role are users, groups, or other application roles. The process of becoming a member of an application role is called *mapping*. That is, being mapped to an application role is to become a member of an application role. Best practice is to map groups instead of individual users to application roles for easier maintenance.

To add or remove members from an application role:


1. Log into Fusion Middleware Control, navigate to **Security**, then select **Application Roles** to display the **Application Roles** page.

For information about navigating to the **Security** menu, see *Accessing Oracle Enterprise Manager Fusion Middleware Control*, page 2-21.


2. Choose **Select Application Stripe to Search**, then select the **obi** from the list. Click the search icon next to **Role Name**.

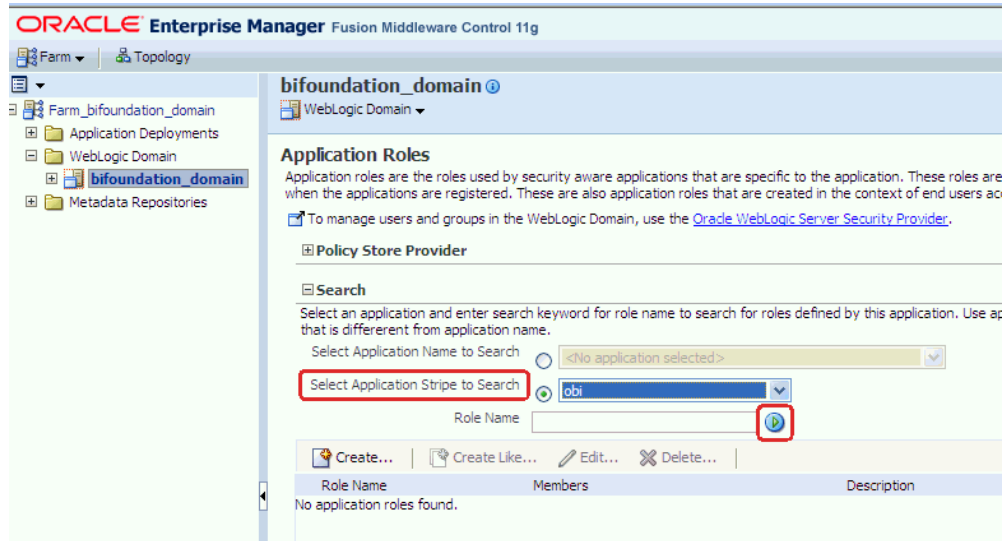

The BI Publisher application roles are displayed. In the following figure the default application roles are shown.

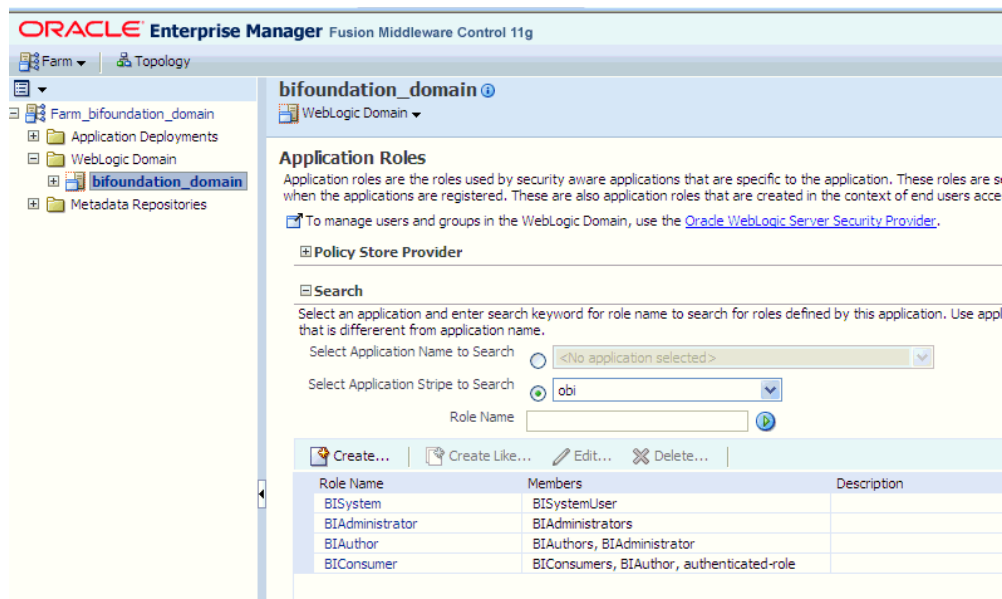


3. Select the cell next to the application role name and click **Edit** to display the **Edit Application Role** page. In the following figure the BIAuthor application role has been selected.

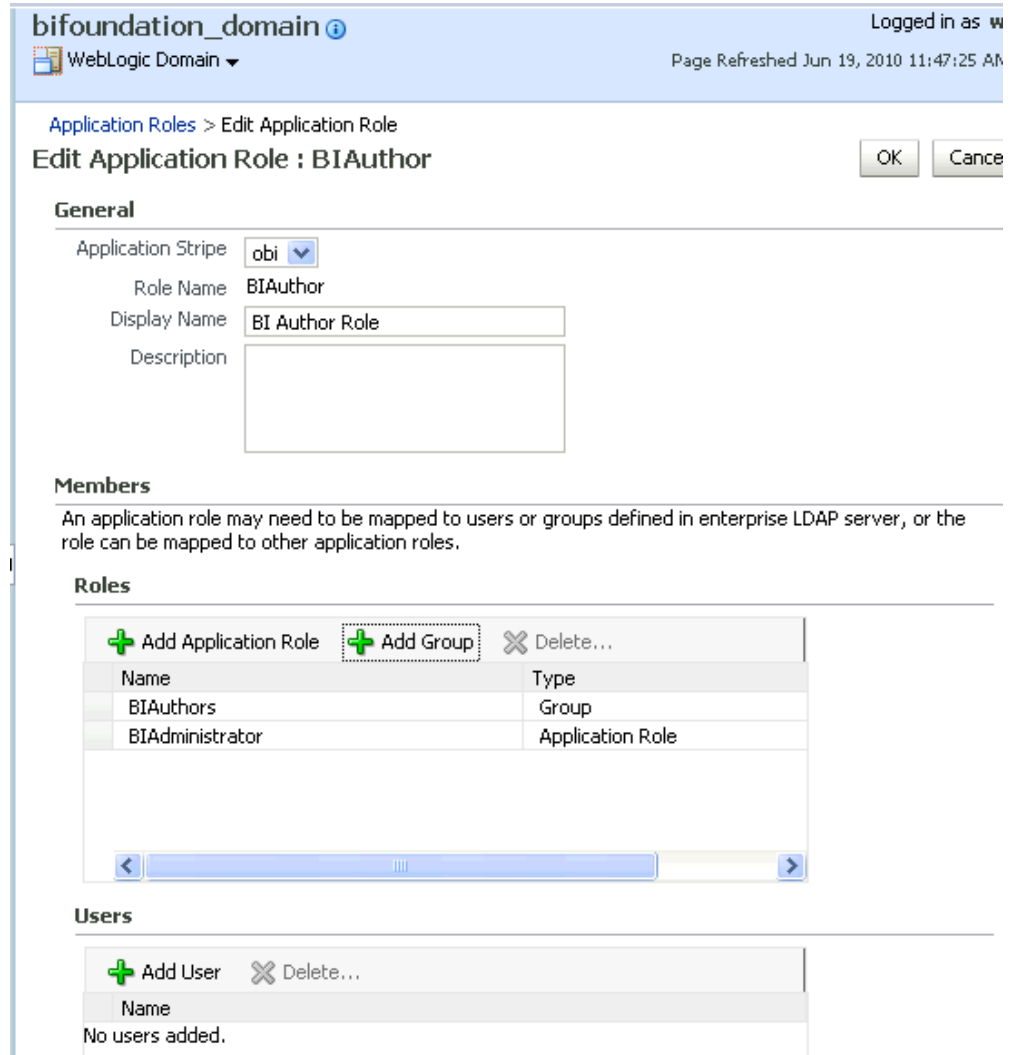

You can add or delete members from the **Edit Application Role** page. Valid members are application roles, groups, and users.

4. Select from the following options:
 - **To delete a member:** From **Members**, select from **Name** the member to activate the **Delete** button. Click **Delete**.
 - **To add a member:** Click the **Add** button that corresponds to the member type being added. Select from **Add Application Role**, **Add Group**, and **Add User**.
5. If adding a member, complete **Search** and select from the available list. Use the shuttle controls to move the member to the selected field. Click **OK**.

For example, the following figure shows the **Add Group** dialog and after the **Report_Dev** group has been selected.

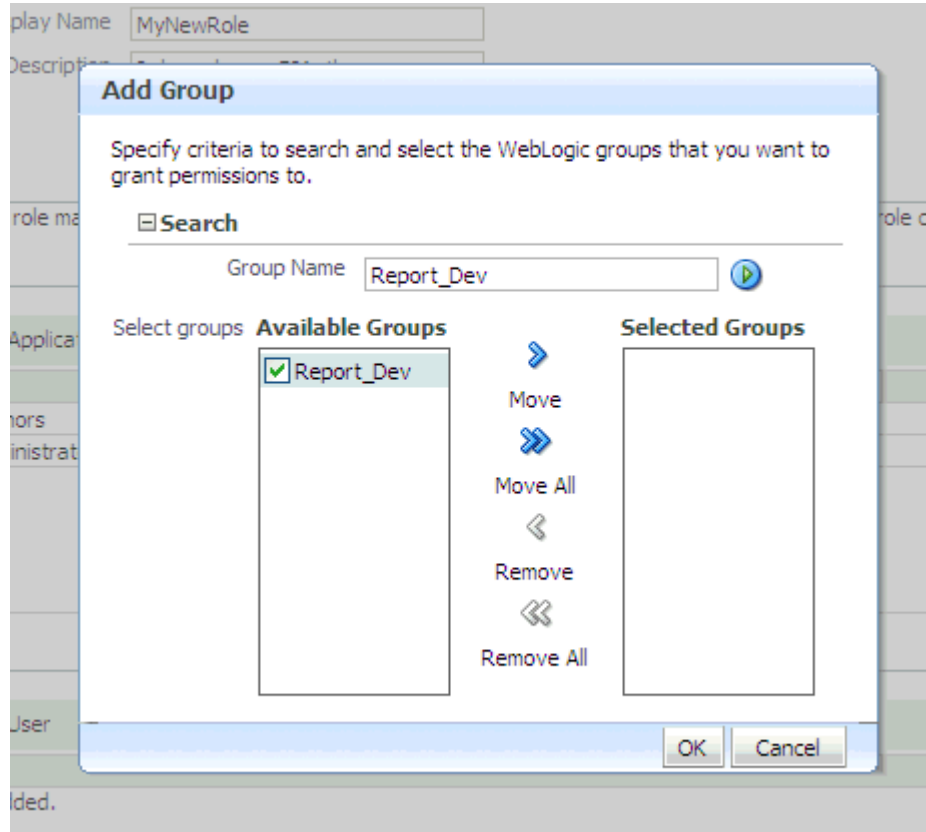

The added member displays in the **Members** column corresponding to the application role modified in the **Application Roles** page.

Managing Credentials

Credentials used by the system are stored in a single secure credential store. Oracle Wallet is the default credential store file (cwallet.sso). The credential store alternatively can be LDAP-based and Oracle Internet Directory is the supported LDAP server in this release. LDAP-based credential stores are configured and administered using Oracle Enterprise Manager Fusion Middleware Control or WLST commands.

Each credential is uniquely identified by a *map name* and a *key name*. Each map contains a series of keys and each key is a credential. The combination of map name and key name must be unique for all credential store entries. The following credential maps are used by BI Publisher:

- oracle.bi.system: Contains the credentials that span the entire BI Publisher platform.
- oracle.bi.publisher: Contains the credentials used by only BI Publisher.

The following two credential types are supported:

- Password: Encapsulates a user name and a password.
- Generic: Encapsulates any customized data or arbitrary token, such as public key certificates.

To facilitate getting started with your development environment, default credentials are inserted into the file-based credential store during installation. Be aware that BI Publisher credentials such as user passwords are stored in the identity store and managed with its corresponding administrative interface.

Managing the Credential Store

Credentials can be managed either in Fusion Middleware Control or using WLST command. For more information about both methods, see "Managing the Domain Credential Store" in *Oracle Fusion Middleware Application Security Guide*.

Managing BISystemUser Credentials

If using Oracle Business Intelligence as a data store, BI Publisher establishes system communication with it as BISystemUser. If you change the BISystemUser password in the identity store administrative interface, you also must change the password in the credential store (oracle.bi.system credential map). This applies if you have created a custom application role to take the place of the default BISystemUser. Components will be unable to communicate with each other if the credentials are out-of-sync. For more information about how Oracle Business Intelligence uses BISystemUser for trusted system communication, see *Oracle Fusion Middleware Security Guide for Oracle Business Intelligence Enterprise Edition*.

Customizing the Default Security Configuration

You can customize the default security configuration in the following ways:

- Configure a new authentication provider. For more information, see *Configuring a New Authentication Provider*, page 2-30.
- Configure new policy store and credential store providers. For more information, see *Configuring a New Policy Store and Credential Store Provider*, page 2-30.
- Migrate policies and credentials from one store to another. For more information, see *Reassociating the Policy Store and Credential Store*, page 2-30.
- Create new application roles. For more information, see *Creating Application Roles Using Fusion Middleware Control*, page 2-31.
- Create new application policies. For more information, see *Creating Application Policies Using Fusion Middleware Control*, page 2-31.

- Modify the permission grants for an application policy. For more information, see *Changing Permission Grants for an Application Policy*, page 2-39.

Configuring a New Authentication Provider

You can configure another supported LDAP server to be the authentication provider. Configuring BI Publisher to use an alternative external identity store is performed using the Oracle WebLogic Server Administration Console. BI Publisher delegates authentication and user population management to the authentication provider and identity store configured for the domain it is a part of. For example, if configured to use Oracle WebLogic Server's default authentication provider, then management is performed in the Oracle WebLogic Server Administration Console. If configured to use Oracle Internet Directory (OID), then the OID management user interface is used, and so on.

If using an authentication provider other than the one installed as part of the default security configuration, the default users and groups discussed in *Default Users and Groups*, page 2-7 will not be automatically present. You can create users and groups with names of your own choosing or re-create the default user and group names if the authentication provider supports this. After this work is completed, you must map the default BI Publisher application roles to different groups again. For example, if your corporate LDAP server is being used as the identity store and you are unable to re-create the BI Publisher default users and groups in it, you will need to map the default application roles to different groups specific to the corporate LDAP server. Use Fusion Middleware Control to map the groups to application roles.

For information about how to configure a different authentication provider, see *Oracle Fusion Middleware Oracle WebLogic Server Administration Console Online Help* and *Oracle Fusion Middleware Securing Oracle WebLogic Server*.

Configuring a New Policy Store and Credential Store Provider

The policy store and credential store can be file-based or LDAP-based. The supported LDAP server for both stores in this release is Oracle Internet Directory. The pre-requisites for using an LDAP-based store are the same as for both the policy store and credential store. For more information, see "Configuring a Domain to Use an LDAP-Based Policy Store" in *Oracle Fusion Middleware Application Security Guide*.

Reassociating the Policy Store and Credential Store

Migrating policies and credentials from one security store to another is called reassociation. Both policy store and credential store data can be reassociated (migrated) from a file-based store to an LDAP-based store, or from an LDAP-based store to another LDAP-based store

Since the credential store and the policy store must both be of the same type, when reassociating one store you must reassociate the other.

For more information about reassociation and the steps required to migrate credential store and policy store data to Oracle Internet Directory, see "Reassociating Domain Stores with Fusion Middleware Control" in *Oracle Fusion Middleware Application Security Guide*.

Customizing the Policy Store

The Fusion Middleware Security model can be customized for your environment by creating your own application policies and application roles. Existing application roles can be modified by adding or removing members as needed. Existing application policies can be modified by adding or removing permission grants. For more information about managing application policies and application roles, see *Oracle Fusion Middleware Application Security Guide*.

Important: Before creating a new application policy or application role and adding it to the default BI Publisher security configuration, familiarize yourself with how permission and group inheritance works. It is important when constructing a role hierarchy that circular dependencies are not introduced. Best practice is to leave the default security configuration in place and first incorporate your customized application policies and application roles in a test environment. For more information, see *Permission Grants and Inheritance*, page 2-3.

Creating Application Roles Using Fusion Middleware Control

There are two methods for creating a new application role:

- **Create New** - A new application role is created. Members can be added at the same time or you can save the new role after naming it and add members later.
- **Copy Existing** - A new application role is created by copying an existing application role. The copy contains the same members as the original, and is made a Grantee of the same application policy. You can modify the copy as needed to finish creating the new role.

To create a new application role:

1. Log into Fusion Middleware Control, navigate to **Security**, then select **Application Roles** to display the **Application Roles** page.

For information, see *Accessing Oracle Enterprise Manager Fusion Middleware Control*, page 2-21.

2. Choose **Select Application Stripe to Search**, then select **obi** from the list. Click the search icon next to **Role Name**.

The BI Publisher application roles display.

3. Click **Create** to display the **Create Application Role** page. You can enter all information at once or you can enter a **Role Name**, save it, and complete the remaining fields later. Complete the fields as follows:

In the **General** section:

- **Role Name** - Enter the name of the application role.
- (Optional) **Display Name** - Enter the display name for the application role.
- (Optional) **Description** - Enter a description for the application role.

In the **Members** section, select the users, groups, or application roles to be mapped to the application role, Select **Add Application Role** or **Add Group** or **Add Users** accordingly. To search in the dialog box that displays:

- Enter a name in **Name** field and click the blue button to search.
- Select from the results returned in the **Available** box.
- Use the shuttle controls to move the desired name to the **Selected** box.
- Click **OK** to return to the **Create Application Role** page.
- Repeat the steps until all members are added to the application role.

4. Click **OK** to return to the **Application Roles** page.

The application role just created displays in the table at the bottom of the page.

To create an application role based on an existing one:

1. Log into Fusion Middleware Control, navigate to **Security**, then select **Application Roles** to display the **Application Roles** page.

For information, see Accessing Oracle Enterprise Manager Fusion Middleware Control, page 2-21.

2. Choose **Select Application Stripe to Search**, then select the **obi** from the list. Click the search icon next to **Role Name**.

The BI Publisher application roles display.


3. Select an application role from the list to enable the action buttons.

4. Click **Create Like** to display the **Create Application Role Like** page.

The Members section is completed with the same application roles, groups, or users that are mapped to the original role.

5. Complete the **Role Name**, **Display Name**, and **Description** fields.

The following figure shows an application role based upon BIAuthor after being named **MyNewRole**, as an example.

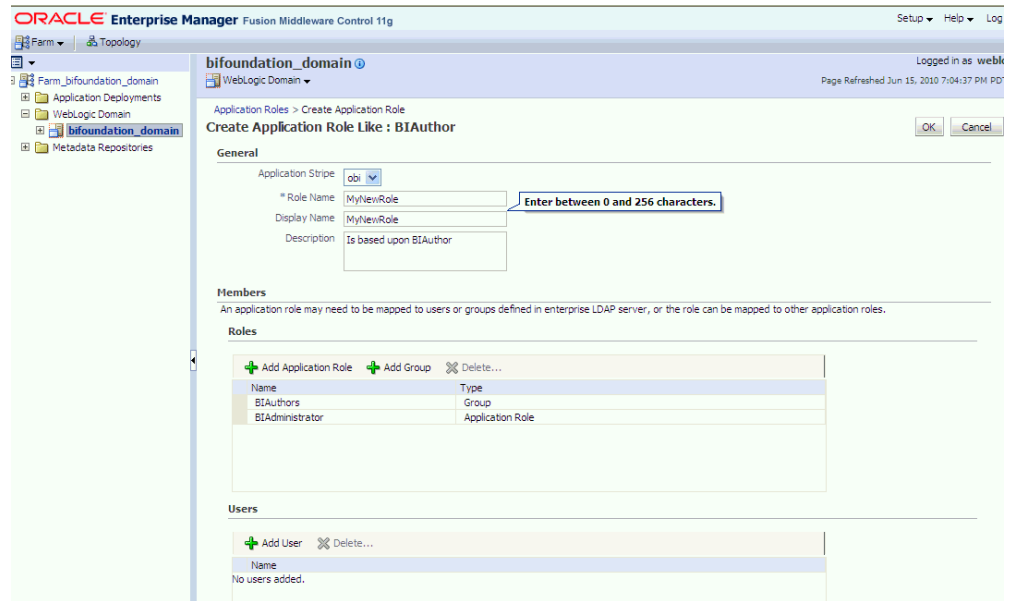

6. Use **Add** and **Delete** to modify the members as appropriate and click **OK**.

The just created application role displays in the table at the bottom of the page. The following figure shows the example **MyNewRole** that is based upon the default BIAuthor application role.

Information
A new application role MyNewRole has been added.

Application Roles
Application roles are the roles used by security aware applications that are specific to the application. These roles are seeded by applications in WebLogic Domain pool when the applications are registered. These are also application roles that are created in the context of end users accessing the application.
To manage users and groups in the WebLogic Domain, use the [Oracle WebLogic Server Security Provider](#).

Policy Store Provider

Search
Select an application and enter search keyword for role name to search for roles defined by this application. Use application stripe to search if application uses a stripe that is different from application name.
Select Application Name to Search: [Dropdown]
Select Application Stripe to Search: obi
Role Name: [Text Box]

Role Name	Members	Description
BISystem	BISystemUser	
BIAdministrator	BIAdministrators	
BIAuthor	BIAuthors, BIAdministrator	
BIConsumer	BICongsumers, BIAuthor, authenticated-role	
MyNewRole	BIAuthors, BIAdministrator	Is based upon BIAuthor

Creating Application Policies Using Fusion Middleware Control

All BI Publisher permissions are provided and you cannot create new permissions. Permission grants are controlled in the Fusion Middleware Control **Application Policies** page. The permission grants are defined in an application policy. An application role, user, or group, is then mapped to an application policy. This process makes the application role, user, or group a **Grantee** of the application policy.

There are two methods for creating a new application policy:

- **Create New** - A new application policy is created and permissions are added to it.
- **Copy Existing** - A new application policy is created by copying an existing application policy. The copy is named and existing permissions are removed or permissions are added as needed.

To create a new application policy:

1. Log into Fusion Middleware Control, navigate to **Security**, then select **Application Policies** to display the **Application Policies** page.

For information, see Accessing Oracle Enterprise Manager Fusion Middleware Control, page 2-21.

2. Choose **Select Application Stripe to Search**, then select the **obi** from the list. Click the search icon next to **Permission**.

The BI Publisher application policies are displayed. The **Principal** column displays the name of the policy **Grantee**.

3. Click **Create** to display the **Create Application Grant** page.
4. To add permissions to the policy being created, click **Add** in the **Permissions** area to display the **Add Permission** dialog.
 - Complete the **Search** area and click the blue search button next to the **Resource Name** field.

All permissions located in the **obi** application stripe are displayed. For information about the BI Publisher permissions, see Default Application Roles and Permissions, page 2-9.
 - Select the desired BI Publisher permission and click **OK**. Repeat until all desired permissions are selected. Selecting non-BI Publisher permissions will have no effect in the policy.
 - To remove any items, select it and click **Delete**.

You are returned to the **Create Application Grant** page. The selected permissions display in the **Permissions** area.

5. To add an application role to the policy being created, click **Add Application Role** in the **Grantee** area to display the **Add Application Role** dialog.
 - Complete the **Search** area and click the blue search button next to the **Resource Name** field.
 - Select from the **Available Roles** list and use the shuttle controls to move it to **Selected Roles**.
 - Click **OK**.

You are returned to the **Application Policies** page. The **Principal** (Grantee) and **Permissions** of the policy just created are displayed in the table.


To create an application policy based on an existing one:

1. Log into Fusion Middleware Control navigate to **Security**, then select **Application Policies** to display the **Application Policies** page.

For information, see Accessing Oracle Enterprise Manager Fusion Middleware Control, page 2-21.
2. Choose **Select Application Stripe to Search**, then select **obi** from the list. Click the search icon next to **Permission**.

The BI Publisher application policies are displayed. The **Principal** column displays the name of the policy **Grantee**.
3. Select an existing policy from the table.


For example, the following figure shows the **BIAuthor** Principal (Grantee) selected and the **Create Like** button activated.

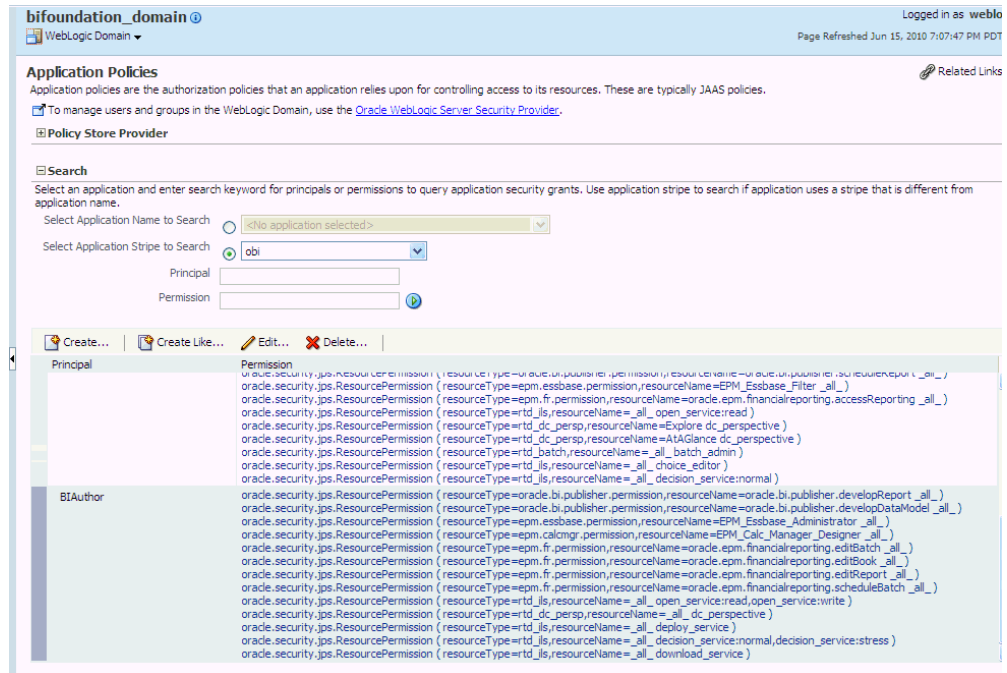

4. Click **Create Like** to display the **Create Application Grant Like** page. The Permissions table displays the names of the permissions granted by the policy selected.
5. To remove any items, select it and click **Delete**.
6. To add application roles to the policy, click **Add Application Role** in the **Grantee** area to display the **Add Application Role** dialog.

The following figures use the **MyNewRole** application role as an example.

- Complete the **Search** area and click the blue search button next to the **Resource Name** field.

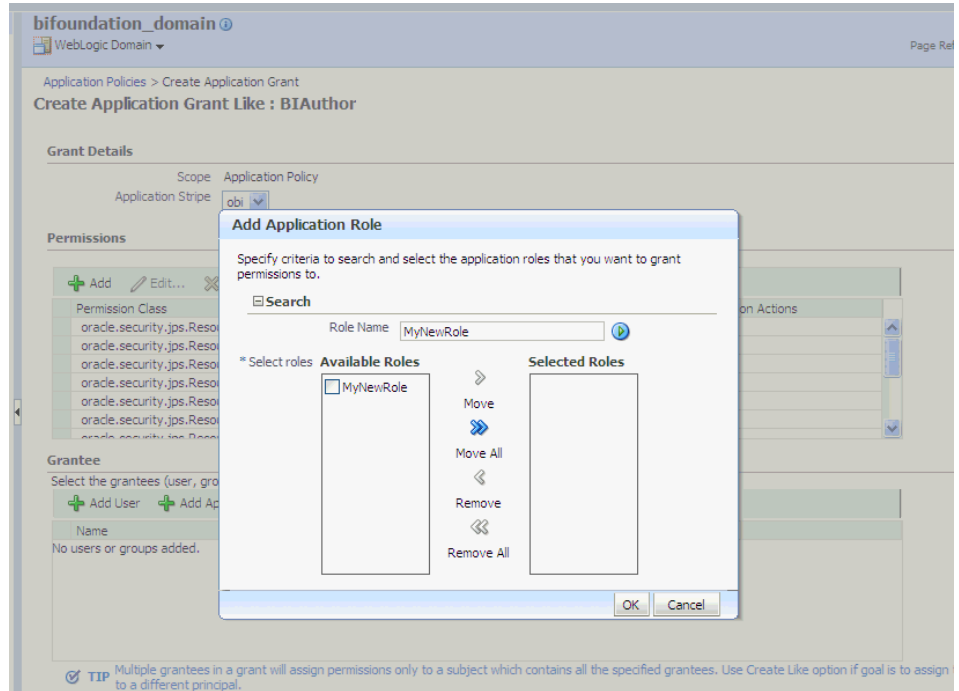

- Select from the **Available Roles** list and use the shuttle controls to move it to **Selected Roles**. The **Create Application Grant Like** page displays with the selected application role added as **Grantee**.

bifoundation_domain @ WebLogic Domain

Application Policies > Create Application Grant

Page Refreshed Jun 15, 2010 7:12:54 PM PC

Logged in as web1

Create Application Grant Like : BIAuthor

OK Cancel

Grant Details

Scope: Application Policy

Application Stripe: obi

Permissions

+ Add Edit... Delete...

Permission Class	Resource Name	Permission Actions
oracle.security.jps.Resource...	resourceType=oracle.bi.publisher.permission/resourceName=oracle.bi.p...	_all
oracle.security.jps.Resource...	resourceType=oracle.bi.publisher.permission/resourceName=oracle.bi.p...	_all
oracle.security.jps.Resource...	resourceType=epm.esbase.permission/resourceName=EPM_Esbase_A...	_all
oracle.security.jps.Resource...	resourceType=epm.calcmgr.permission/resourceName=EPM_Calc_Mana...	_all
oracle.security.jps.Resource...	resourceType=epm.fr.permission/resourceName=oracle.epm.financialE...	_all
oracle.security.jps.Resource...	resourceType=epm.fr.permission/resourceName=oracle.epm.financialE...	_all

Grantee

Select the grantees (user, group or application role) you want to add to the policy.


+ Add User + Add Application Role + Add Group Delete...

Name	Type
MyNewRole	Application Role

TIP Multiple grantees in a grant will assign permissions only to a subject which contains all the specified grantees. Use Create Like option if goal is to assign the same set of permissions to a different principal.

- Click **OK**.

You are returned to the **Application Policies** page. The Principal and Permissions of the policy created are displayed in the table.

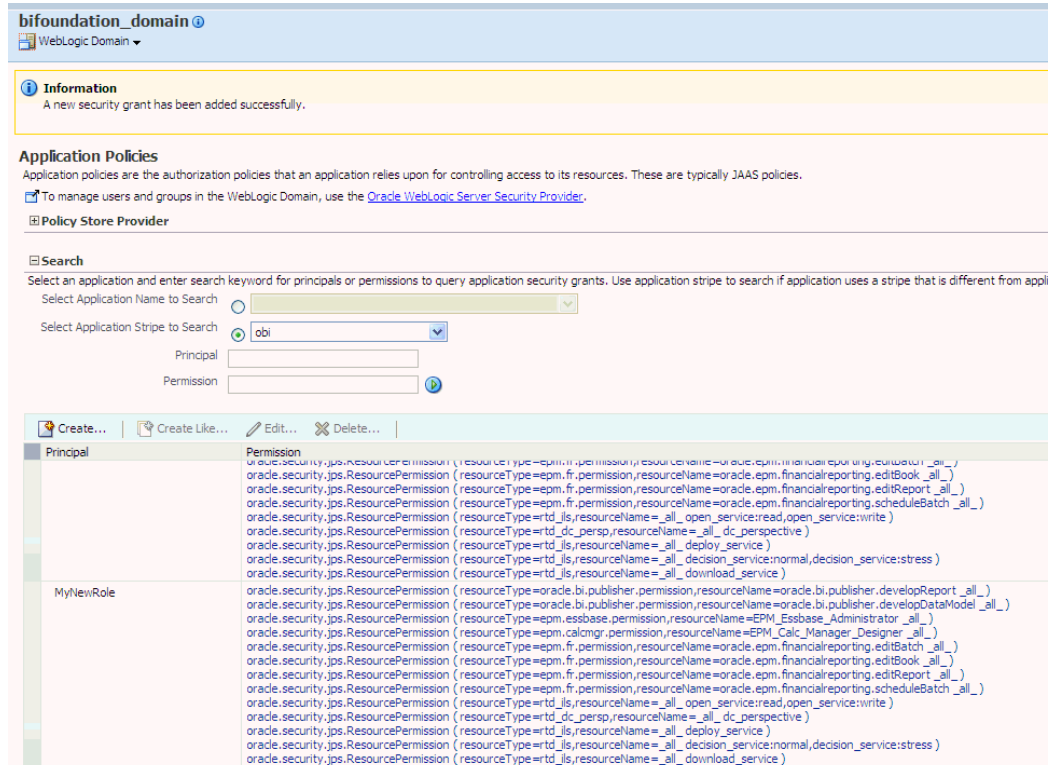

Changing Permission Grants for an Application Policy

You can change one or more permissions granted by an application policy.

To add or remove permission grants from an application policy:

1. Log into Fusion Middleware Control, navigate to **Security**, then select **Application Policies** to display the **Application Policies** page.

For information, see *Accessing Oracle Enterprise Manager Fusion Middleware Control*, page 2-21.

2. Choose **Select Application Stripe to Search**, then select **obi** from the list. Click the search icon next to **Role Name**.

The BI Publisher application policies are displayed. The **Principal** column displays the name of the policy **Grantee**.

3. Select the name of the application role from the **Principal** column and click **Edit**.
4. Add or delete permissions from the **Edit Application Grant** view and click **OK** to save the changes.

For additional information, see "Managing Application Policies" in *Oracle Fusion Middleware Application Security Guide*.

Alternative Security Options

This chapter covers the following topics:

- About Alternative Security Options
- Understanding BI Publisher's Users, Roles, and Permissions
- About Privileges to Use Functionality
- About Catalog Permissions
- How Functional Privileges and Permissions Work Together
- About Access to Data Sources
- Configuring Users, Roles, and Data Access
- Security and Catalog Organization
- Configuring BI Publisher to Use an LDAP Provider
- Integrating with Microsoft Active Directory
- Configuring Single Sign-On
- Configuring BI Publisher to Use Oracle Access Manager (OAM) Single Sign-On
- Setting Up Oracle Single Sign-On

About Alternative Security Options

This chapter describes security concepts and options for a standalone implementation of Oracle BI Publisher, that is, not installed as part of the Oracle Business Intelligence Enterprise Edition. Please note the following:

- If you have installed the Oracle BI Enterprise Edition, see the *Oracle Fusion Middleware Security Guide for Oracle Business Intelligence Enterprise Edition* for information about security.
- If you have installed BI Publisher on its own and you plan to use Oracle Fusion

Middleware Security, see *Configuring Oracle Fusion Middleware Security Model*, page 2-1. The following topics will be of interest in this chapter:

- About Catalog Permissions, page 3-5
- About Access to Data Sources, page 3-7
- To configure BI Publisher with these other Oracle security models:
 - Oracle BI Server security
 - Oracle E-Business Suite security
 - Oracle Database security
 - Siebel CRM security

see *Integrating with Other Oracle Security Models*, page 5-1.

Use the information in this chapter to configure the following:

- BI Publisher (native) Security
- Integration with an external LDAP provider

Note: Any identity store provider supported by Oracle WebLogic Server can be configured to be used with BI Publisher. Configuring BI Publisher to use an alternative external identity store is performed using the Oracle WebLogic Server Administration Console. For this configuration, see *Customizing the Default Security Configuration*, page 2-29.

- Integration with a Single Sign-On provider


Understanding BI Publisher's Users, Roles, and Permissions

A user is assigned one or multiple **Roles**. A **Role** can grant any or all of the following:

- privileges to use functionality
- permissions to perform actions on catalog objects
- access to data sources

You can create a hierarchy of roles by assigning roles to other roles. In this way the privileges and permissions of multiple roles can roll up to higher level roles. The following graphic shows an example of the hierarchy structure of User, Role, and

Folder:

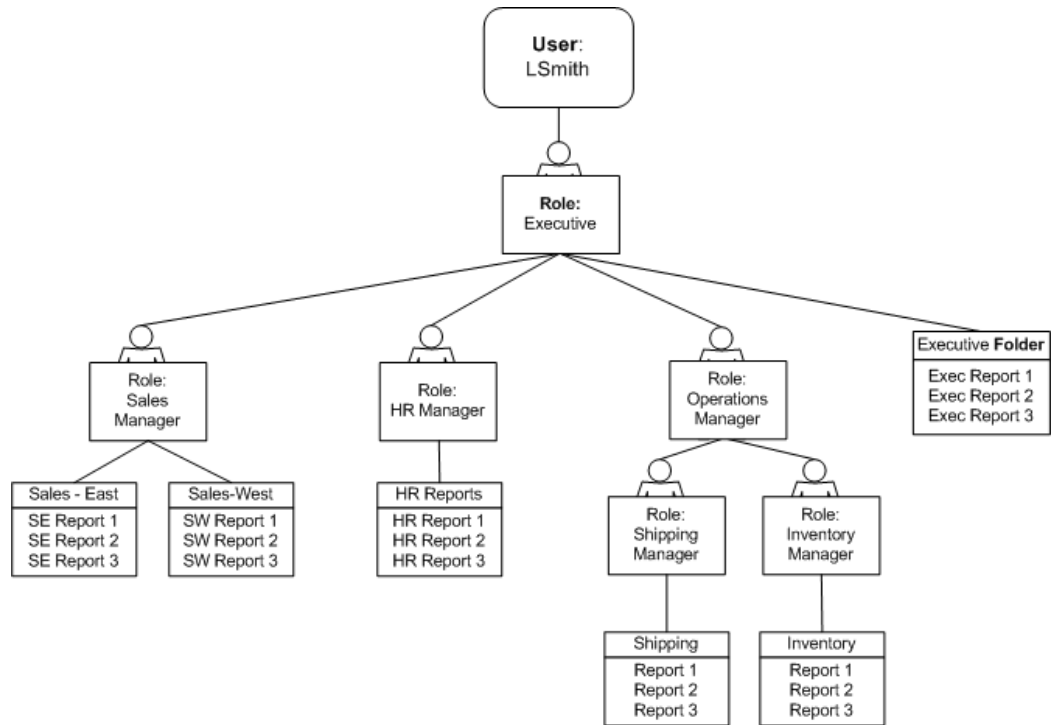

Options for Configuring Users and Roles

There are three options for setting up users and roles:

- Set up users and roles in the BI Publisher Security Center
For this option, follow the instructions in this section.
- Configure BI Publisher with an existing LDAP server
For this option, see *Configuring BI Publisher to Use an External LDAP Provider*, page 3-15.
- Set up users and roles in a supported Oracle security model. For this option see *Integrating with Other Oracle Security Models*, page 5-1.

About Privileges to Use Functionality

BI Publisher provides a set of functional roles to grant access to specific functionality within the application. Assign these roles to users based on their need to perform the associated tasks. These roles cannot be updated or deleted.

The following table shows the privileges granted to each functional role:

Role	Privileges
BI Publisher Excel Analyzer	View Export History (public reports only) Grants access to the Excel Analyzer
BI Publisher Online Analyzer	View Export History (public reports only) Grants access to the Online Analyzer
BI Publisher Scheduler	View Export History Schedule
BI Publisher Template Designer	View Export History (public reports only) Enables access to Layout Editor Enables log on from Template Builder
BI Publisher Developer	View Export Schedule History Edit Report Enables access to Layout Editor Enables log on from the Template Builder Enables access to the Data Model Editor

Role	Privileges
BI Publisher Administrator	<p>Enables the privileges of all other roles</p> <p>Grants access to the Administration page and all administration tasks</p>

Roles assigned these privileges cannot perform any actions on objects in the catalog until they are also granted permissions on the catalog objects.

About Catalog Permissions

To perform the actions allowed by the functional roles above, a role must also be granted permissions to access the objects in the catalog.

Note that each of these permissions can be granted at the folder level to enable the operations on all items within a folder.

Permission	Description
Read	Enables a role to display an object in the catalog. If the object resides within a folder, a role must be granted the Read permission on the object and its parent Folder.
Write	<p>Enables a role to edit an object.</p> <p>A role must be granted Write permissions on a folder to save objects to the folder or edit objects within the folder.</p> <p>A role must also be granted one of the following roles to enable editing of the specified object:</p> <ul style="list-style-type: none"> • Report - requires the BI Publisher Developer role • Data Model - requires the BI Publisher Developer role • Sub Template and Style Template - requires the BI Publisher Developer Role or the BI Publisher Template Designer Role
Delete	Enables a role to delete an object.
Run Report Online	Enables a role to run a report and view it in the report viewer.

Permission	Description
Schedule Report	Enables a role to schedule a report.
View Report Output	Enables a role to access the Report Job History for a report.

It is important to note that for a report consumer to successfully run a report, his role must have read access to every object that is referenced by the report.

For example, a report consumer must run a report in a folder named Reports. The data model for this report, resides in a folder named Data Models. This report references a Sub Template stored in a folder named Sub Templates, and also references a Style Template stored in a folder named Style Templates. The report consumer's role must be granted Read access to all of these folders and the appropriate objects within.

How Functional Privileges and Permissions Work Together

It is important to understand the following rules regarding the behavior of privileges and permissions:

- A role assigned a functional privilege cannot perform any actions in the catalog until catalog permissions are also assigned
- A role can be assigned a set of permissions on catalog objects without being assigned any functional privileges
- If a role is already assigned a functional privilege, when catalog permissions are assigned, some permissions will be inherited

A Role Must Be Assigned Catalog Permissions

A role assigned a functional role cannot perform any actions in the catalog until catalog permissions are granted. Note that the functional roles themselves (BI Publisher Developer, BI Publisher Scheduler, and so on) cannot be directly assigned permissions in the catalog. The functional roles must first be assigned to a custom role and then the custom role is available in the catalog permissions table.

A Role Can Be Granted Catalog Permissions Only

The permissions available directly in the catalog enable running reports, scheduling reports, and viewing report output. Therefore if your enterprise includes report consumers who will have no other reason to access BI Publisher except to run and view reports, the roles for these users will consist of catalog permissions only.

Roles Already Assigned a Functional Role Will Inherit Some Permissions When Catalog Permissions Are Granted

If a role is already assigned one of the functional roles, when that role is granted permissions on a particular folder in the catalog, some permissions will be granted automatically based on the functional role.

For example, assume you create a role called Financial Report Developer. You assign this role the BI Publisher Developer role. In order for this role to create reports in the Financial Reports folder in the catalog, you must grant this role Read, Write, and Delete permissions on the folder. Because the BI Publisher Developer role includes run report, schedule report, and view report history privileges, these permissions will be automatically granted on any folder to which a role assigned the BI Publisher Developer role is granted Read access.

About Access to Data Sources

A role must be granted access to a data source to view reports that run against the data source or to build and edit data models that use the data source. Add access to data sources in the **Roles and Permissions** page. See Granting Data Access, page 3-11.

Configuring Users, Roles, and Data Access

Creating Roles

To create a new role in BI Publisher:

1. Navigate to the BI Publisher **Administration** page.
2. Under **Security Center**, click **Roles and Permissions**.
3. Click **Create Role**.
4. Enter a **Name** for the role and optionally, enter a **Description**.
5. Click **Apply**.
6. Click **Assign Roles** to assign roles to the user.
7. Use the shuttle buttons to move **Available Roles** to **Assigned Roles**. Click **Apply**.
8. To add a role to a role, click **Add Roles**.
9. Use the shuttle buttons to move **Available Roles** to **Included Roles**. Click **Apply**.

To add data sources to a role, see Granting Data Access, page 3-11.

Creating Users and Assigning Roles to a User

To create a new user in BI Publisher:

1. Navigate to the BI Publisher **Administration** page.
2. Under **Security Center**, click **Users**.
3. Click **Create User**.
4. Add the **User Name** and **Password** for the user.
5. Click **Apply**.
6. Click **Assign Roles** to assign roles to the user.
7. Use the shuttle buttons to move **Available Roles** to **Assigned Roles**. Click **Apply**.


Granting Catalog Permissions

For a role to access an object in the catalog, the role must be granted Read permissions on both the object and the folder in which the object resides. Permissions can be granted at the folder level and applied to all the objects and subfolders it contains, or applied to individual objects.


To grant catalog permissions to a role:

1. Navigate to the Catalog.
2. Locate the folder or object on which you wish to grant permissions and click **More**. From the menu, select **Permissions**. Alternatively, you can select the folder and click **Permissions** in the **Tasks** region.


Note: Permissions cannot be granted on the root Shared folder.

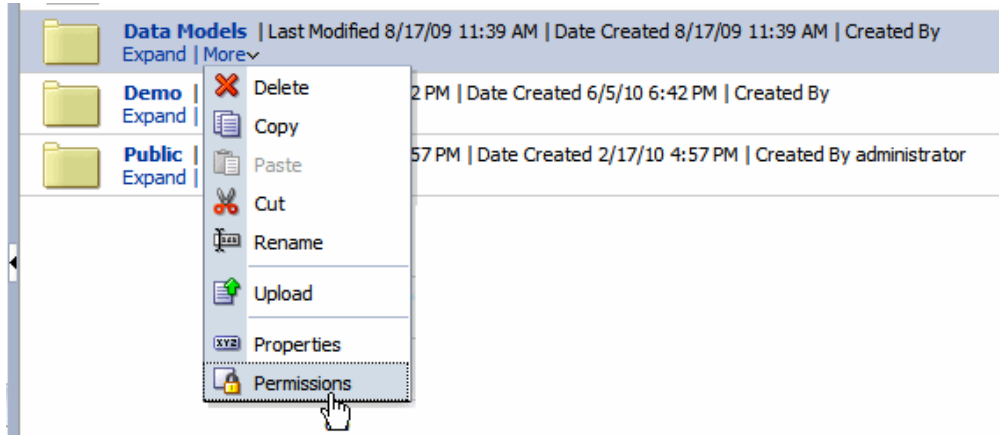


3. On the **Permissions** dialog, click **Create**.

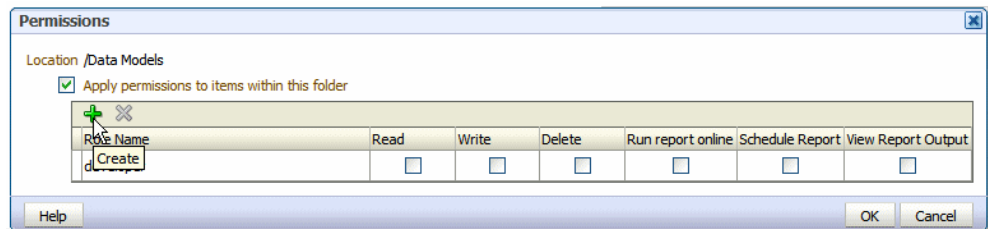

4. On the **Add Roles** dialog, enter a search string to find a role, or simply click **Search** to display all roles. Use the shuttle buttons to move roles from the **Available Roles** list to the **Selected Roles** list.

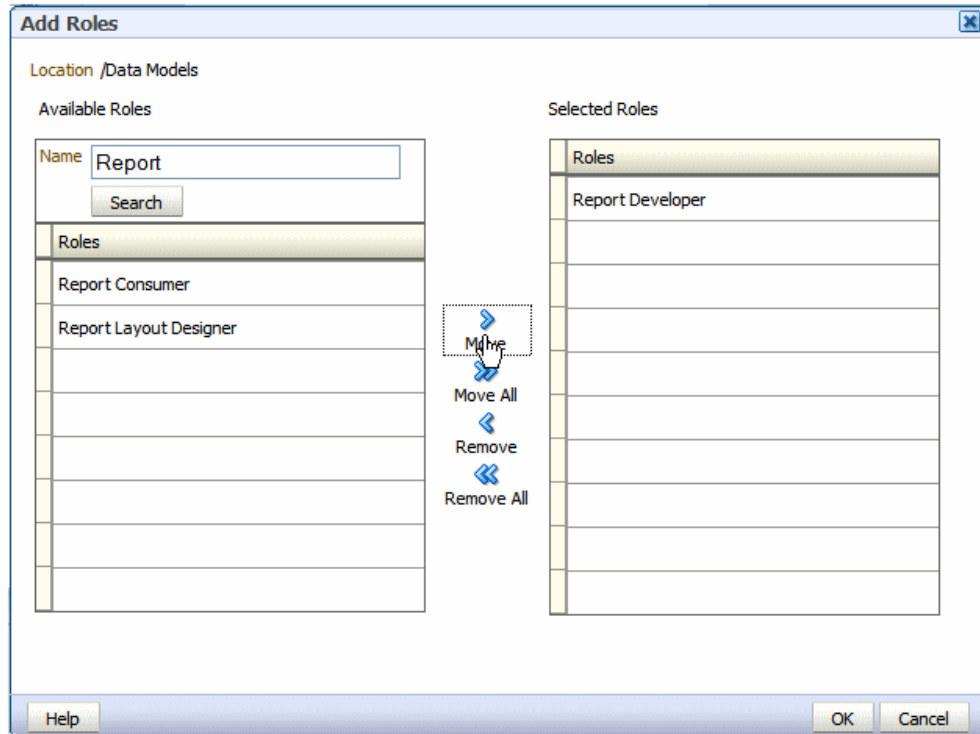

5. When finished, click **OK** to return to the **Permissions** dialog.
6. On the **Permissions** dialog, configure the permissions required by the role.

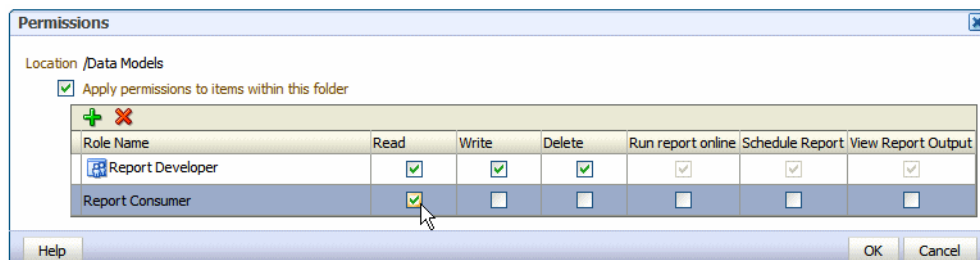

Note the following:

- The icon next to the Report Developer role indicates that this role is assigned one of the BI Publisher functional roles (in this case, the BI Publisher Developer role).
- Once the Report Developer role is assigned access to this folder, the following permissions are automatically granted based on the privileges that make up the BI Publisher Developer Role: Run report online, Scheduler Report, View Report Output.

7. If you are granting permissions on a Folder, select **Apply permissions to items within this folder**, if the permissions should apply to all objects.

Granting Data Access

A role must be granted access to a data source if the role must:

- Run or schedule a report built on a data model that retrieves data from the data source
- Create or edit a data model that retrieves data from the data source

To grant a role access to a data source:

1. Navigate to the BI Publisher **Administration** page.
2. Under **Security Center**, click **Roles and Permissions**.
3. On the **Roles and Permissions** page, locate the role, then click **Add Data Sources**.
4. On the **Add Data Sources** page you will see a region for each of the following types of data sources:
 - Database Connections
 - File Directories
 - LDAP Connections
 - OLAP Connections
5. Use the shuttle buttons to move the required data sources from the **Available Data Sources** list to the **Allowed Data Sources** list.
6. When finished, click **Apply**.

Security and Catalog Organization

Because permissions are granted in the catalog, it is very important to be aware of this design when creating roles for your organization and when structuring the catalog.

For example, assume your organization requires the following roles:

Example Role Requirements

Role	Required Permissions
Sales Report Consumer	Needs to view and schedule Sales department reports.
Financial Report Consumer	Needs to view and schedule Financial department reports. Needs access to the Excel Analyzer.
Executive Report Consumer	Needs to consume both Sales and Financial reports as well as executive level reports.
Sales Report Developer	Needs to create data models and reports for Sales department only.
Financials Report Developer	Needs to create data models and reports for Financials department only. Will need to create some reports using the Excel Analyzer.
Layout Designer	Needs to design report layouts for all reports.

You may consider setting up the catalog as follows:

Example Catalog Setup

Folder	Contents
Sales Reports	All reports for Sales Report Consumer. Also contains any Sub Templates and Style Templates associated with Sales reports.
Sales Data Models	All data models for Sales reports.
Financials Reports	All reports for Financials Report Consumer. Also contains any Sub Templates and Style Templates associated with Financials reports.
Financials Data Models	All data models for Financials reports
Executive Reports	All executive-level reports and data models.

Set up the roles as follows:

Example Role Configuration

Sales Report Consumer:

Grant catalog permissions:

- To the Sales Reports folder add the Sales Report Consumer and grant:
 - Read
 - Schedule Report
 - Run Report Online
 - View Report Online
- To the Sales Data Models folder add the Sales Report Consumer and grant:
 - Read

Grant Data Access:

On the **Roles** page, locate the role, then click **Add Data Sources**. Add all data sources used by Sales reports.

Financials Report Consumer

Assign Roles:

On the **Roles** tab assign the Financials Report Consumer the BI Publisher Excel Analyzer role.

Grant catalog permissions:

- To the Financials Reports folder add the Financials Report Consumer and grant:
 - Read
 - Schedule Report
 - Run Report Online
 - View Report Online
- To the Financials Data Models folder add the Financials Report Consumer and grant:
 - Read

Grant Data Access:

On the **Roles** page, locate the role, then click **Add Data Sources**. Add all data sources used by Financials reports.

Executive Report Consumer

Assign Roles:

On the **Roles** tab, assign the Executive Report Consumer the Sales Report Consumer and the Financials Report Consumer roles.

Grant catalog permissions:

- To the Executive Reports folder add the Executive Report Consumer and grant:
 - Read
 - Schedule Report
 - Run Report Online
 - View Report Online
- Select **Apply permissions to items within this folder**

Grant Data Access:

On the **Roles** tab, locate the role, then click **Add Data Sources**. Add all data sources used by Executive reports.

Sales Report Developer

Assign Roles:

On the **Roles** tab, assign the Sales Report Developer the BI Publisher Developer Role and the BI Publisher Template Designer Role.

Grant Data Access:

On the **Roles** tab, locate the Sales Report Developer and click **Add Data Sources**. Add all data sources from which Sales data models will be built.

Grant Catalog Permissions:

- In the catalog, to the Sales Data Models folder add the Sales Report Developer and grant:
 - Read, Write, Delete
- To the Sales Reports folder, add the Sales Report Developer and grant:
 - Read, Write, Delete

Financials Report Developer

Assign Roles:

On the **Roles** tab, assign the Financials Report Developer the BI Publisher Developer Role, the BI Publisher Excel Analyzer Role, and the BI Publisher Template Designer Role.

Grant Data Access:

On the **Roles** tab, locate the Financials Report Developer and click **Add Data Sources**.

Add all data sources from which Financials data models will be built.

Grant Catalog Permissions:

- In the catalog, to the Financials Data Models folder add the Financials Report Developer and grant:
Read, Write, Delete
- To the Financials Reports folder, add the Financials Report Developer and grant:
Read, Write, Delete

Layout Designer

Assign Roles:

On the **Roles** tab, assign the Layout Designer the BI Publisher Template Designer Role and the BI Publisher Developer Role.

Grant Catalog Permissions:

- In the catalog, to the Financials Data Models and the Sales Data Models folders add the Layout Designer Role and grant:
Read
- To the Financials Reports and Sales Reports folders, add the Layout Designer and grant:
Read, Write, Delete

Configuring BI Publisher to Use an LDAP Provider

BI Publisher can be integrated with your LDAP provider to manage users and report access. Create the users and roles within your LDAP server, then configure the BI Publisher server to access your LDAP server.

In the BI Publisher security center module, assign folders to those roles. When a user logs into the server they will have access to those folders and reports assigned to the LDAP roles.

Integrating the BI Publisher server with Oracle LDAP consists of three main tasks:

1. Set up users and roles in your LDAP provider
2. Configure BI Publisher to recognize your LDAP server
3. Assign catalog permissions and data access to roles

For information on supported LDAP servers, see System Requirements and Certification, page xii for the most up-to-date information on supported hardware and software.

Using the Client Application

The following steps must be performed in your LDAP provider. See the documentation for your provider for details on how to perform these tasks.

Set Up Users and Roles

1. In the Domain root node of your LDAP provider, create the following roles to integrate with BI Publisher. See Understanding Users and Roles, page 3-2 for full descriptions of the required functional roles.

BI Publisher System Group	Description
XMLP_ADMIN	The administrator role for the BI Publisher server. You must assign the Administrator account used to access your LDAP server the XMLP_ADMIN group.
XMLP_DEVELOPER	Allows users to create and edit reports and data models.
XMLP_SCHEDULER	Allows users to schedule reports.
XMLP_ANALYZER_EXCEL	Allows users to use the Excel Analyzer feature.
XMLP_ANALYZER_ONLINE	Allows users to use the online analysis feature (online analyzer).
XMLP_TEMPLATE_BUILDER	Allows users to connect to the BI Publisher server from the Template Builder for Word and to upload and download templates. Allows users to design layouts using the BI Publisher Layout Editor.

2. Create other functional roles as required by your implementation (for example: HR Manager, Warehouse Clerk, or Sales Manager), and assign the appropriate BI Publisher functional roles.
3. Assign roles to users.

Important: Ensure to assign the Administrator account the XMLP_ADMIN role.

Configure the BI Publisher to Recognize Your LDAP Server

To configure the BI Publisher server to recognize your LDAP server, update the Security properties in the BI Publisher Administration page as follows:

1. On the **Administration** page, under **Security Center** click **Security Configuration**.

2. Create a Local Superuser.

Enter a **Superuser Name** and **Password** and select Enable Local Superuser check box. Enabling a local superuser will ensure that you can access the Administration page of BI Publisher in case of security model configuration errors.

3. Scroll down to the **Security Model** region. Select LDAP for the Security Model.

4. Enter the following:

- **URL**

For example: `ldap://example.com:389/`

Important: If you are using LDAP over SSL note the following:

- the protocol is "ldaps"
- the default port is 636

An example URL would be: `ldaps://example.com:636/`

- **Administrator Username**

For example: `orcladmin`

- **Administrator Password**

For example: `welcome`

- **Distinguished Name for Users**

For example: `cn=Users,dc=example,dc=com`

Important: The distinguished name values are case-sensitive and must match the settings in your LDAP server.

- **Distinguished Name for Groups**

For example: `cn=Groups,dc=us,dc=oracle,dc=com`

The default value is

`cn=OracleDefaultDomain,cn=OracleDBSecurity,cn=Products,cn=`

OracleContext, dc=example, dc=com

- **Group Search Filter**

The default value is (&(objectclass=groupofuniquenames)(cn=*))

- **Group Attribute Name**

The default value is cn

- **Group Member Attribute Name**

The default value is uniquemember

- **Member of Group Attribute Name**

(Optional) Set this attribute only if `memberOf` attribute is available for User and Group. Group Member Attribute is not required when this attribute is available. Example: `memberOf` or `wlsMemberOf`

- **Group Description Attribute Name**

The default value is description

- **JNDI Context Factory Class**

The default value is `com.sun.jndi.ldap.LdapCtxFactory`

- **Group Retrieval Page Size**

Setting this values enables support of the LDAPv3 control extension for simple paging of search results. By default, pagination is not used. This value determines the number of results to return on a page (for example, 200). Your LDAP server must support control type 1.2.840.113556.1.4.319 to support this feature, such as OID 10.1.4. See your LDAP server documentation for information on support of this control type.

For more information about LDAP pagination and the required control type, see the article: RFC 2696 - LDAP Control Extension for Simple Paged Results Manipulation (<http://www.faqs.org/rfcs/rfc2696.html>) .

- **Attribute used for Login Username**

Enter the attribute that supplies the value for the Login user name. This is also known as the Relative Distinguished Name (RDN). This value defaults to `cn`.

- **Automatically clear LDAP cache** - to schedule the automatic refresh of the LDAP cache the LDAP cache per a designated interval, select this box. After you select this box the following additional fields become enabled:

- Enter an integer for **Ldap Cache Interval**. For example, to clear the LDAP

cache once a day, enter 1.

- Select the appropriate **Ldap Cache Interval Unit**: Day, Hour, or Minute.
- **Default User Group Name**
(Optional) Use this option if your site has the requirement to allow all authenticated users access to a set of folders, reports, or other catalog objects. The user group name that you enter here is added to all authenticated users. Any catalog or data source permissions that you assign to this default user group will be granted to all users.
- **Attribute Names for Data Query Bind Variables**
(Optional) Use this property to set attribute values to be used as bind variables in a data query. Enter LDAP attribute names separated by a commas for example: memberOf, primaryGroupID,mail

See *Creating Bind Variables from LDAP User Attributes*, *Oracle Fusion Middleware Data Modeling Guide for Oracle Business Intelligence Publisher*.

5. Restart the BI Publisher server.

The following figure shows a sample of the LDAP security model entry fields from the Security Configuration page:

Security Model

Security Model: LDAP

URL: ldap://hostname:port
(Example: ldap://hostname:port)

Administrator Username: Admin

Administrator Password: ●●●●●●

Distinguished Name for Users: cn=Users,dc=example,dc=com
(Example: cn=Users,dc=example,dc=com)

Distinguished Name for Groups:
(Example: null)

Group Search Filter: (&(objectclass=groupofuniquenames)(cn=*))
(Default Value: (&(objectclass=groupofuniquenames)(cn=*))

Group Attribute Name: cn
(Default Value: cn)

Group Member Attribute Name: uniquemember
(Default Value: uniquemember)

Member Of Group Attribute Name:
(Optional) Please set this attribute only if memberOf attribute is available for User and Group. Group Member attribute is not required when this attribute is available. Example: memberOf, wlsMemberOf

Group Description Attribute Name: description
(Default Value: description)

JNDI Context Factory Class: com.sun.jndi.ldap.LdapCtxFactory
(Default Value: com.sun.jndi.ldap.LdapCtxFactory)

Group Retrieval Page Size: 200
Page size feature is not supported by all LDAP servers

Attribute used for RDN: cn
(Default Value: cn)

Automatically clear LDAP cache

Ldap Cache Interval: 1
Please enter value that is greater than or equal to 1

Ldap Cache Interval Unit: Hour

Default User Group Name:
(Optional) Please enter a user group name that is added to all authenticated users

Attribute Names for Data Query Bind Variables:
(Optional) Please enter ldap attribute names separated by commas that are used as bind variables for data query

Note that if you are configuring BI Publisher to use LDAP over SSL, you must also configure Java keystore to add the server certificate to JVM. For more information, see *Configuring BI Publisher for Secure Socket Layer (SSL) Communication*, page 4-3.

Assign Data Access and Catalog Permissions to Roles

1. Log in to BI Publisher as a user assigned the XMLP_ADMIN role in your LDAP provider.
2. On the **Administration** page click **Roles and Permissions**.

You will see the roles you created in your LDAP provider to which you assigned the XMLP_ roles. Note the following:

- The XMLP_X roles are not shown because these are controlled through the LDAP interface.
- The Users tab is no longer available under the Security Center because users are now managed through your LDAP interface.
- Roles are not updateable in the BI Publisher interface, with the exception of adding data sources.

3. Click **Add Data Sources** to add BI Publisher data sources to the role. A role must be assigned access to a data source to run reports from that data source or to build data models from the data source. For more information see *Granting Data Access*, page 3-11.
4. Grant catalog permissions to roles. See *About Catalog Permissions*, page 3-5 and *Granting Catalog Permissions*, page 3-8 for details on granting catalog permissions to roles.

Users can now log in using their LDAP username/password.

Integrating with Microsoft Active Directory

Microsoft Active Directory supports the LDAP interface and therefore can be configured with BI Publisher using LDAP Security.

Active Directory Configuration

1. Add users that will need access to BI Publisher.

Add the users under "Users" or any other organization unit in the Domain Root.

2. Add the BI Publisher system groups. The Scope of the groups must be Domain Local.

The following must be added as BI Publisher system groups:

BI Publisher System Group	Description
XMLP_ADMIN	The administrator role for the BI Publisher server. You must assign the Administrator account used to access your LDAP server the XMLP_ADMIN group.
XMLP_DEVELOPER	Allows users to create and edit reports and data models.
XMLP_SCHEDULER	Allows users to schedule reports.
XMLP_ANALYZER_EXCEL	Allows users to use the Excel Analyzer feature.
XMLP_ANALYZER_ONLINE	Allows users to use the online analysis feature (online analyzer).

BI Publisher System Group	Description
XMLP_TEMPLATE_BUILDER	Allows users to connect to the BI Publisher server from the Template Builder for Word and to upload and download templates. Allows users to design layouts using the BI Publisher Layout Editor.

3. Grant BI Publisher system groups to global groups or users.

You can grant BI Publisher system groups directly to users or through global groups.

Example 1: Grant Users the BI Publisher Administrator Role

1. Under the **Active Directory User and Computers**, open the XMLP_ADMIN group and click the **Members** tab.
2. Click **Add** to add users who need to BI Publisher Administrator privileges.

Example 2: Grant Users Access to Scheduling Reports

The "HR Manager" global group is defined under "Users".

All users in this group need to schedule reports.

To achieve this, add "HR Manager" as a Member of the XMLP_SCHEDULER group.

BI Publisher Configuration

1. On the **Administration** page, click **Security Configuration**.
2. Set up a Local Superuser if one has not already been configured. This is very important in case the security configuration fails, you will still be able to log in to BI Publisher using the Superuser credentials.
3. In the **Security Model** region of the page, select LDAP from the **Security Model** list.
4. Enter the details for the Active Directory server, as described in the preceding section *Configuring BI Publisher to Use an LDAP Provider*, page 3-15, noting the following specific information for Active Directory:
 - Set **Group Search Filter** objectclass to "group"
 - Set **Member of Group Member Attribute Name** to "memberOf" (**Group Member Attribute Name** can be left blank).
 - Set **Attribute used for Login Username** to "sAMAccountName".

- If you are using LDAP over SSL note the following:
 - the protocol is "ldaps"
 - the default port is 636

An example URL would be: ldaps://example.com:636/

The following figure shows an example configuration highlighting the recommendations stated above:

5. Restart the BI Publisher application.

Note that if you are configuring BI Publisher to use LDAP over SSL, you must also configure Java keystore to add the server certificate to JVM. For more information, see *Configuring BI Publisher for Secure Socket Layer (SSL) Communication*, page 4-3.

Logging In to BI Publisher Using the Active Directory Credentials

The User login name defined in **Active Directory Users and Computers >User Properties >Account** is used for the BI Publisher login name. Add the Domain to the user name to log in to BI Publisher. For example: "scott_tiger@domainname.com".

Note the following:

- The **Attribute used for Login Username** can be `sAMAccountName` instead of

`userPrincipalName.`

- You must use `sAMAccountName` for the **Attribute used for Login Username** when the "User logon name (pre-Windows 2000)" is required to use for the BI Publisher login username.
- User names must be unique across all organization units.

Assign Data Access and Catalog Permissions to Roles

1. Log in to BI Publisher as a user assigned the XMLP_ADMIN role Active Directory.
2. On the **Administration** page click **Roles and Permissions**.

You will see the roles you created in Active Directory to which you assigned the XMLP_ roles. Note the following:

- The XMLP_X roles are not shown because these are controlled through the Active Directory interface.
 - The Users tab is no longer available under the Security Center because users are now managed through Active Directory.
 - Roles are not updateable in the BI Publisher interface, with the exception of adding data sources.
3. Click **Add Data Sources** to add BI Publisher data sources to the role. A role must be assigned access to a data source to run reports from that data source or to build data models from the data source. For more information see *Granting Data Access*, page 3-11.
 4. Grant catalog permissions to roles. See *About Catalog Permissions*, page 3-5 and *Granting Catalog Permissions*, page 3-8 for details on granting catalog permissions to roles.

Configuring Single Sign-On

Integrating a single sign-on (SSO) solution enables a user to log on (sign-on) and be authenticated once per browser session. Thereafter, the authenticated user is given access to system components or resources according to the permissions and privileges granted to that user. Oracle BI Publisher can be configured to trust incoming HTTP requests already authenticated by a SSO solution that is configured for use with Oracle Fusion Middleware and Oracle WebLogic Server.

When BI Publisher is configured to use SSO authentication, it accepts authenticated users from whatever SSO solution Oracle Fusion Middleware is configured to use. If

SSO is not enabled, then BI Publisher challenges each user for authentication credentials. When BI Publisher is configured to use SSO, a user is first redirected to the SSO solution's login page for authentication.

Configuring BI Publisher to work with SSO authentication requires minimally that the following be done:

- Oracle Fusion Middleware and Oracle WebLogic Server are configured to accept SSO authentication. Oracle Access Manager is recommended in production environments.
- The HTTP header information required for identity propagation with SSO configurations (namely, user identity and SSO cookie) is specified and configured.
- BI Publisher is configured to trust incoming messages.

See "Configuring Single Sign-On in Oracle Fusion Middleware" in *Oracle Fusion Middleware Applications Security Guide*.

Once you have configured your Single-Sign-On provider to protect Oracle BI Publisher, configure BI Publisher to trust incoming messages.

On the **Administration** page, under **Security Center**, click **Security Configuration**.

In the Single Sign-On region, select the **User Single Sign-On** check box.

Enter the fields appropriate for you your SSO provider.

Configuring BI Publisher to Use Oracle Access Manager (OAM) Single Sign-On

BI Publisher can be configured to use Oracle Access Manager as your SSO provider.

Required components:

- Oracle Fusion Middleware is configured with Oracle WebLogic Server's embedded LDAP server as the default authenticator (DefaultAuthenticator)
- Oracle Access Manager 10.1.4.x is configured with Oracle Internet Directory as the default LDAP server
- Oracle HTTP is configured to be a Web proxy to access the application server, namely Oracle WebLogic Server
- Oracle Access Manager SSO is configured to be the authentication provider for Oracle Fusion Middleware
- Oracle BI Publisher is installed and has been configured to use Oracle Internet Directory (see Configure the BI Publisher Server to Recognize Your LDAP Server, page 3-17).

Directly after BI Publisher is installed, the embedded LDAP server in Oracle WebLogic Server is the default authentication source (identity store). The BI WebLogic domain must be configured to the new identity store, Oracle Internet Directory, as the main authentication source.

For more information about creating a new default authenticator in Oracle WebLogic Server, see the following Oracle Fusion Middleware guides:

- *Oracle Fusion Middleware Oracle WebLogic Server Administration Console Online Help*
- *Oracle Fusion Middleware Understanding Security for Oracle WebLogic Server 11g*
- *Oracle Fusion Middleware Application Security Guide 11g*

After Oracle WebLogic Server has been configured, perform the following in BI Publisher:

Note: The is procedure assumes that you have the Single Sign-Off URL. If you do not know the Single-Sign-Off URL, consult the Oracle Access Manager administrator at your site.

1. On the **Administration** page, under **Security Center**, click **Security Configuration**.
2. If you have not already done so, set up a **Local Superuser**. The Superuser credentials will enable you to log in to the BI Publisher Administration page in case of errors in the security configuration.
3. In the Single Sign-On region, select the **User Single Sign-On** check box.
4. Enter the following:
 - On the **Single Sign-On Type** list select Oracle Access Manager.
 - Enter the Single Sign-Off URL.
 - Select the method for **How to get Username**.
 - Enter the **User Name Parameter**, for example: REMOTE_USER.
 - Select **How to get user locale**, for example: HTTP Parameter.
 - Enter the **User Locale Parameter**, for example: LOCALE_LANGUAGE.

A sample configuration is shown in the following figure:

Single Sign-On

To enable Single Sign-On, first set up BI Publisher as a partner application on the SSO Server. Enter the value for the single sign-off URL and other required information provided by the SSO Server below.

Use Single Sign-On

Single Sign-On Type	Oracle Access Manager
Single Sign-Off URL	http://example.com:7777/access/oblix/lang/en-us/logout.
How to get username	HTTP Header
User Name Parameter	REMOTE_USER
How to get user locale	HTTP Parameter
User Locale Parameter	LOCALE_LANGUAGE

Setting Up Oracle Single Sign-On

To set up Oracle Single Sign-On, first configure WebLogic Server using the instructions in the chapter, "Configuring Single Sign-On in Oracle Fusion Middleware" in the *Oracle Fusion Middleware Application Security Guide 11g*. BI Publisher must be configured to use Oracle Internet Directory as the default LDAP server

IMPORTANT: When using Oracle SSO, BI Publisher assumes that a login username can be derived from `Osso-User-Dn`, which is HTTP Header value. For example, if your `Osso-User-Dn` on HTTP Header looks like this:

```
cn=admin, cn=users, dc=us, dc=oracle, dc=com
```

Then BI Publisher assumes the value of first `cn=` is the login username (that is, "admin" in this case).

Therefore if your `Osso-User-Dn` does not contain a login username as the first `cn` value, then select "Other SSO Type" to configure your settings (even if you use Oracle SSO).

Setup Procedure

1. Modify the application server configuration file to protect the `xmlpservlet`. See the topic "Configuring `mod_osso` to Protect Web Resources" in the *Oracle Fusion Middleware Application Security Guide 11g*
2. In the `mod_osso.conf` add a new "Location" directive as follows:

```
<!-- Protect xmlpservlet -->
<Location /xmlpservlet>
    require valid-user
    AuthType Basic
</Location>
```
3. To allow Web service communication between BI Publisher and its client components (the Template Builder and the Excel Analyzer) you must make additional modifications to the `mod_osso.conf` file. To open up the `xmlpservlet` to allow these Web services, enter the following directives:

```

<Location /xmlpserver/services/>
  require valid-user
  AuthType Basic
  Allow from All
  Satisfy any
</Location>

<Location /xmlpserver/report_service/>
  require valid-user
  AuthType Basic
  Allow from All
  Satisfy any
</Location>

Location /xmlpserver/ReportTemplateService.xls/>
  require valid-user
  AuthType Basic
  Allow from All
  Satisfy any
</Location>

```

4. For integration with Oracle BI Presentation Services, you must disable SSO for Web services between the BI Presentation Services server and the BI Publisher server. If you made this entry when performing the previous step, you do not need to repeat this setup.

To open up the xmlpserver to allow the Web service, enter the following directive in the `mod_osso.conf` file:

```

<Location /xmlpserver/services/>
  require valid-user
  AuthType Basic
  Allow from All
  Satisfy any
</Location>

```

A sample `mod_osso.conf` file with the entries discussed in this section is shown below:


```

LoadModule osso_module libexec/mod_osso.so

<IfModule mod_osso.c>
    OssoIpCheck off
    OssoIdleTimeout off
    OssoConfigFile
/home/as1013/ohome/Apache/Apache/conf/osso/osso.conf

    <Location /xmlpserver>
        require valid-user
        AuthType Basic
    </Location>

<Location /xmlpserver/services/>
    require valid-user
    AuthType Basic
    Allow from All
    Satisfy any
</Location>

<Location /xmlpserver/report_service/>
    require valid-user
    AuthType Basic
    Allow from All
    Satisfy any
</Location>

Location /xmlpserver/ReportTemplateService.xls/>
    require valid-user
    AuthType Basic
    Allow from All
    Satisfy any
</Location>

<Location /xmlpserver/Guest/>
    require valid-user
    AuthType Basic
    Allow from All
    Satisfy any
</Location>
#
# Insert Protected Resources: (see Notes below for how to protect
resources)
#

# _____ -
#
# Notes
#
# _____ -
#
# 1. Here's what you need to add to protect a resource,
#    e.g. <ApacheServerRoot>/htdocs/private:
#
#    <Location /private>
#        require valid-user
#        AuthType Basic
#    </Location>
#
#

```

```

</IfModule>

#
# If you would like to have short hostnames redirected to
# fully qualified hostnames to allow clients that need
# authentication via mod_osso to be able to enter short
# hostnames into their browsers uncomment out the following
# lines
#
#PerlModule Apache::ShortHostnameRedirect
#PerlHeaderParserHandler Apache::ShortHostnameRedirect


```

5. Restart the HTTP server.
6. In the BI Publisher: Set up the Single Sign-Off URL on the BI Publisher Security Configuration page.

From the Administration page, click Security Configuration. Enter the following in the Oracle Single Sign-On region:

- Select **Use Oracle Single Sign-On**
- Enter the Single Sign-Off URL with the value you wrote down in the preceding step. The remaining fields are not applicable to Oracle SSO.

A sample BI Publisher Security Configuration page is shown in the following figure:

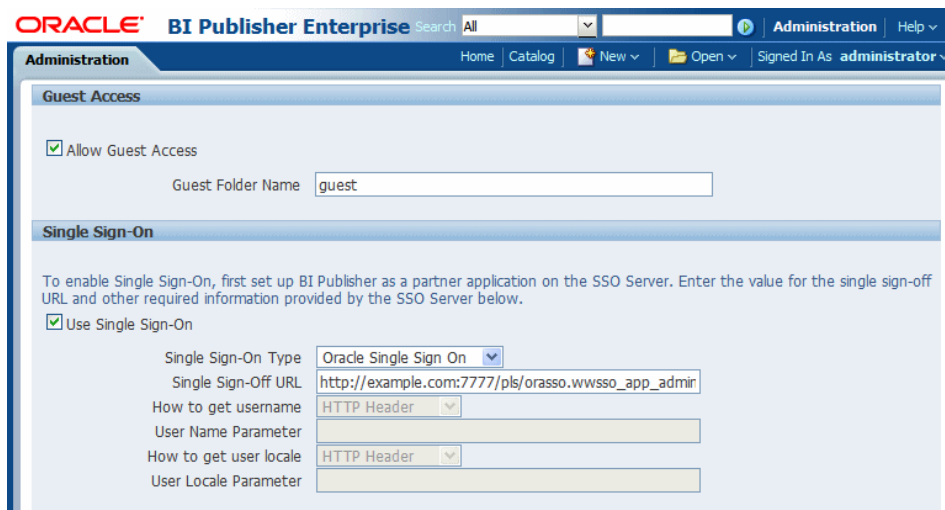

7. Create a BI Publisher Local Superuser to ensure access to BI Publisher regardless of your selected security configuration. See Enabling a Local Superuser, page 4-1 for more information.
8. Restart the application through the Oracle Fusion Middleware Control page.

9. Enter the URL to access the BI Publisher Enterprise application, and you will be redirected to the SSO login page.

Other Security Topics

This chapter covers the following topics:


- Enabling a Local Superuser
- Enabling a Guest User
- Configuring BI Publisher for Secure Socket Layer (SSL) Communication
- Configuring Proxy Settings

Enabling a Local Superuser

BI Publisher allows you to define an administration Superuser. Using the Superuser credentials you can directly access the BI Publisher administrative functions without logging in through the defined security model.

Set up this Superuser to ensure access to all administrative functions in case of failures with the configured security model. It is highly recommended that you set up a Superuser.

1. Click **Administration**.
2. Under **Security Center** click **Security Configuration**.
3. Under **Local Superuser**, select the box and enter the credentials for the Superuser.

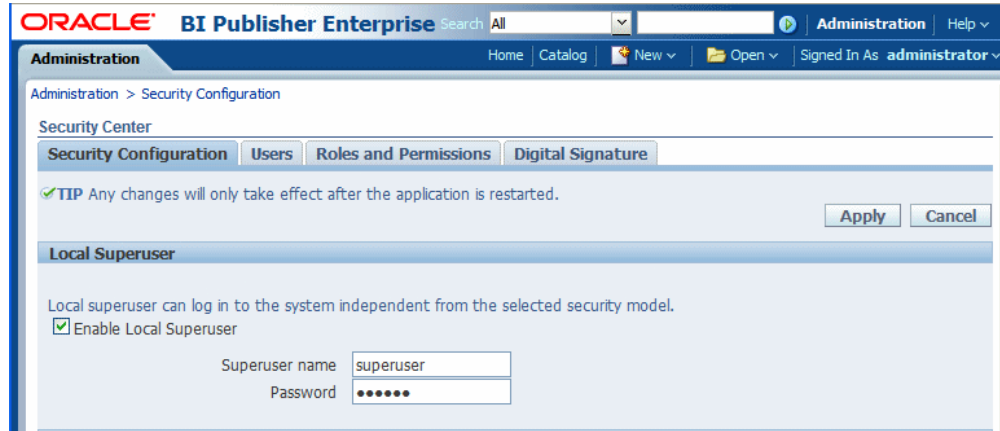

- Restart the BI Publisher application.

Enabling a Guest User

BI Publisher allows you configure public access to specific reports by defining a "Guest" folder. Any user can access the reports in this folder without entering credentials. Note that Guest access is not supported if you are using a shared catalog with Oracle Business Intelligence Enterprise Edition.


Important: Guest access is not supported with Single Sign-On.

Note that all objects required to view a report must be present in the Guest folder because the Guest folder is the only folder the guest user will have any access rights to. Therefore the report and the data model must be present in the Guest folder as well as Sub Templates and Style Templates, if applicable. The guest user will have read access only.

The Guest user must also be granted access to the report data source.

To enable guest access:

- Under Shared Folders, create the folder to which you want to grant public access.
- Click **Administration**.
- Under **Security Center** select **Security Configuration**.
- Under **Guest Access**, select **Allow Guest Access**.
- Enter the name of the folder that you created for public access.

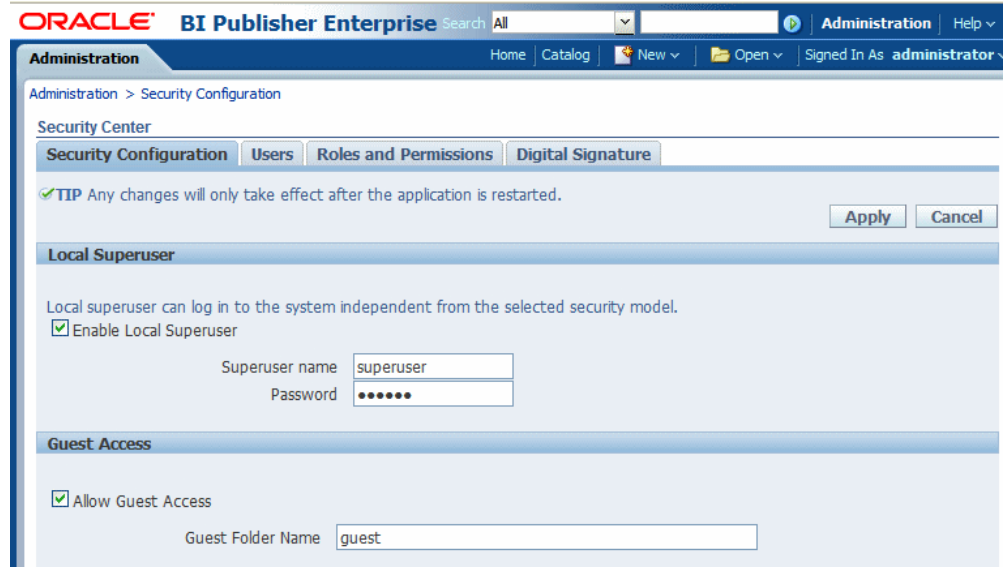

- Restart the BI Publisher application.
- Add the objects to the Guest folder that you want the guest users to access: folders, reports, data models, Sub Templates and Style Templates.

Note: The report must reference the data model that is stored in the guest folder. Therefore, if you copy a report with its data model from another location, ensure to open the report and reselect the data model so that the report references the data model inside the guest folder.

Similarly, any references to Sub Templates or Style Templates must also be updated.

- Grant access to the data sources used by data models in your Guest folder. See *Setting Up Data Sources*, page 9-1 for information on granting Guest access to a data source.

Users who access BI Publisher will see the Guest button on the log on page. Users can select this button and view the reports in your chosen guest folder without presenting credentials.

Configuring BI Publisher for Secure Socket Layer (SSL) Communication

If BI Publisher is communicating with other applications over SSL you may need to perform additional configuration to ensure operability.

Important: It is strongly recommended that you enable Secure Socket Layer (HTTPS) on the middle tier hosting the Web services because the trusted username/password that is passed can be intercepted. This also pertains to Web services that are used for communication between BI Publisher and Oracle BI Presentation Services.

- Point BI Publisher to the System-Wide Keystore
- Import certificates to the Java keystore
- Configure the Delivery Manager

Pointing BI Publisher to the System-Wide Keystore

By default, BI Publisher uses the Java keystore:
`{java.home}/lib/security/cacerts`

If you are using a different location as your keystore, set the `JAVA_OPTS` environment variable for your Web server to tell the BI Publisher server where to find the keystore, as follows:

```
set JAVA_OPTS=-Djavax.net.ssl.trustStore=<keystore file>
```

Importing Certificates for Web Services Protected by SSL

If you make calls to Web services that are protected via Secure Sockets Layer (SSL) you must export the certificate from the Web server hosting the Web service and import it into the Java keystore on the machine running BI Publisher.

1. Navigate to the HTTPS site where the WSDL resides.
2. Download the certificate following the prompts (the prompts you see will vary depending on the browser you are using).
3. Install the Certificate into your keystore using the Java keytool, as follows:

```
keytool -import -file <certfile> -alias <certalias> -keystore  
<keystore file>
```
4. Restart the application server.

These steps should not be required if the server certificate is linked to some certificate authority (such as Verisign). But if the Web service server is using a self-generated certificate (for example, in a testing environment), then these steps will be required.

Configuring the Delivery Manager

If you wish to use the default certificates built-in with BI Publisher, no further

configuration is required. SSL will work with the default certificate if the server uses the certificate signed by a trusted certificate authority such as Verisign.

If the user uses the SSL with a self-signed certificate, the certificate information must be entered in the Delivery Configuration page. A self-signed certificate means the certificate is signed by a non-trusted certificate authority (usually the user).

Configuring Proxy Settings

To use external Web Services or HTTP data sources when your BI Publisher server is set up behind a firewall or requires a proxy to access the internet, you must configure Oracle WebLogic Server to be aware of the proxy.

Add the following to `setDomainEnv.sh`:

```
EXTRA_JAVA_PROPERTIES="-Dhttp.proxyHost=www-proxy.example.com
-Dhttp.proxyPort=80
-Djavax.xml.soap.MessageFactory=oracle.j2ee.ws.saaj.soap.MessageFactoryImpl
-Djavax.xml.soap.SOAPFactory=oracle.j2ee.ws.saaj.SOAPFactoryImpl
-Djavax.xml.soap.SOAPConnectionFactory=oracle.j2ee.ws.saaj.client.p2p.HttpSOAPConnectionFactory ${EXTRA_JAVA_PROPERTIES}"
export EXTRA_JAVA_PROPERTIES
```

where

```
-www-proxy.example.com
```

is the proxy host.

Note that for communication between BI Publisher and the other components of Oracle BI Enterprise Edition, you must also set the `http.nonProxyHosts` JVM parameter. This property indicates the hosts that BI Publisher will connect to directly and not through the proxy server. Specify the list of hosts, each separated by a `|`, and in addition a wildcard character (`*`) can be used for matching. For example:

```
-Dhttp.proxySet=true -Dhttp.proxyHost=www-proxy.example.com
-Dhttp.proxyPort=80
-Dhttp.nonProxyHosts="localhost|*.example1.com|*.example2.com"
```

Integrating with Other Oracle Security Models

This chapter covers the following topics:

- Introduction
- Before You Begin: Create a Local Superuser
- Integrating with Oracle BI Server Security
- Integrating with Oracle E-Business Suite
- Integrating with Oracle Database Security
- Integrating with Oracle Siebel CRM Security

Introduction

Oracle BI Publisher supports security models of other Oracle products. This chapter describes how to configure BI Publisher to use the following:

- Oracle BI Server Security, page 5-2
- Oracle E-Business Suite Security, page 5-4
- Oracle Database Security, page 5-6
- Oracle Siebel CRM Security, page 5-9

For conceptual information regarding BI Publisher roles and permissions, see *Understanding BI Publisher Users, Roles, and Permissions*, page 3-2.

Before You Begin: Create a Local Superuser

Before you implement any of these security models, first create a local superuser. The local superuser credentials ensure that you can access the Administration pages of

Oracle BI Publisher in case of any unexpected failures in the configured security settings.

To create a local superuser:

1. On the **Administration** page, click **Security Configuration**.
2. On the **Security Configuration** tab, under the **Local Superuser** region, select the **Enable Local Superuser** check box.



3. Enter a name and password for your superuser.
4. Restart BI Publisher for the Superuser to become activated in the system.

Integrating with Oracle BI Server Security

If you have installed BI Publisher as part of the Oracle Business Intelligence Enterprise Edition and you have configured Oracle BI Enterprise Edition to use legacy Oracle BI Server authentication, follow these procedures to configure BI Publisher to use the BI Server security.

Important: The Oracle BI Server security option is for customers wishing to use legacy 10g authentication. This section does not apply to you if you have configured Oracle Fusion Middleware Security.

These procedures assume that you have already performed the configuration required in the Oracle BI Server. For information on configuring legacy Oracle BI security, see the *Oracle Fusion Middleware Security Guide for Oracle Business Intelligence Enterprise Edition*.

Perform the following in BI Publisher:

1. In the Oracle BI Publisher Administration page, configure Oracle BI Publisher to use Oracle BI Server security.

2. In the Oracle BI Publisher Administration page, assign BI Publisher data sources to roles

Configuring BI Publisher To Use Oracle BI Server Security

1. Log in to BI Publisher with administrator credentials. Navigate to the BI Publisher Administration page. On the Administration page click **Security Configuration**.

Note: To log in directly to the BI Publisher server, use the login URL with the /xmlpserver suffix, for example:
`http://example.com:9704/xmlpserver`

2. In the **Security Model** region of the page, select Oracle BI Server from the list. Provide the following connection information for the Oracle BI Server:

- **JDBC Connection String** - example: `jdbc:oraclebi://host:port/`

If you do not know the connection string to the BI Server, you can copy it from data source connection page. From the **Administration** page, under **Data Sources**, click **JDBC Connection**. Locate the Oracle BIEE server and copy the connection string. If this has not been configured, see Setting Up a JDBC Connection to the Oracle BI Server, page C-3.

- **Administrator Username and Administrator Password**

Enter the BISystemUser and password.

- **Database Driver Class** - example: `oracle.bi.jdbc.AnaJdbcDriver`

3. Restart the BI Publisher application for the security changes to take effect.

Add Data Sources to the Oracle BI Server Roles

1. Log in to Oracle Business Intelligence as an administrator.
2. On the global header click **Administration**. On the Oracle BI Administration page, click **Manage BI Publisher**.
3. On the BI Publisher **Administration** page click **Roles and Permissions**. The groups to which you assigned the BI Publisher groups will display as available roles.
4. Find the group (role) that you wish to add data sources to and click **Add Data Sources**.

Note: Alternatively, you can navigate to the data source and add the roles that will require access to the data source.

5. Locate the appropriate data sources in the **Available Data Sources** list and use the

shuttle buttons to move the sources to the **Allowed Data Sources** list for the role.

6. Click **Apply**.
7. Repeat for all roles that need access to report data sources.

Integrating with Oracle E-Business Suite

BI Publisher can leverage your E-Business Suite security to enable your E-Business Suite users to log in to BI Publisher using their E-Business Suite credentials. When you integrate with the E-Business Suite security, your E-Business Suite responsibilities become available as roles in the BI Publisher security center. You can then add BI Publisher catalog permissions and data access privileges to the imported roles/responsibilities. See *Understanding Users and Roles*, page 3-2.

Note: In this release your users will not be able to access or execute reports stored on the E-Business Suite instance.

Oracle BI Publisher relies on information stored in the DBC file to connect to the E-Business Suite instance. Ensure you can locate and have access to this file. The DBC file is typically located under the \$FND_SECURE directory.

Configuring BI Publisher to Use E-Business Suite Security

1. In the Oracle E-Business Suite, log in as a System Administrator and create the following responsibilities to correspond to the BI Publisher functional roles:
 - XMLP_ADMIN – this is the administrator role for the BI Publisher server.
 - XMLP_DEVELOPER – allows users to build reports in the system.
 - XMLP_SCHEDULER – allows users to schedule reports.
 - XMLP_ANALYZER_EXCEL – allows users to use the Excel Analyzer feature.
 - XMLP_ANALYZER_ONLINE – allows users to use the online analysis feature.
 - XMLP_TEMPLATE_BUILDER - allows users to connect to the BI Publisher server from the Template Builder and to upload and download templates. Allows users to design layouts using the BI Publisher Layout Editor.
2. Add these new BI Publisher responsibilities to the appropriate Users.

Note: Ensure to assign at least one user to the XMLP_ADMIN

group.

3. Log in to Oracle BI Publisher. On the Administration page, select **Security Configuration**.
4. In the Security Model section of the page, select Oracle E-Business Suite from the list.
5. Load the DBC file from the E-Business Suite instance. This is typically located under the \$FND_SECURE directory. If you do not have access to this file, contact your E-Business Suite system administrator. This file specifies how BI Publisher should access the E-Business Suite instance.
6. Restart BI Publisher for the security changes to take effect.

Once you restart the system, the E-Business Suite responsibilities to which BI Publisher roles have been assigned will be visible as roles in the BI Publisher security center.

Adding Data Sources to the E-Business Suite Roles

To view a report generated from a particular data source, a report consumer's role must be granted access to the data source. Similarly, to create a data model based on a particular data source, the report author's role must be granted access to the data source.

To grant a role access to a data source:

1. On the **Administration** tab, under **Security Configuration**, click **Roles and Permissions**. The responsibilities assigned BI Publisher roles in your E-Business Suite instance will display as available roles.
2. Find the role to which you want to add data sources and click **Add Data Sources**. The **Add Data Sources** page will display.
3. Locate the appropriate data sources in the **Available Data Sources** list and use the shuttle buttons to move the sources to the **Allowed Data Sources** list for the role.
4. Click **Apply**.
5. Repeat for all roles that need access to report data sources.

Granting Catalog Permissions to the E-Business Suite Roles

For a role to access objects in a folder, you must grant the role permissions to the catalog object. You can grant permissions at the folder level, so that a role has the same access to every object in a folder, or you can assign access individually to each object in a

folder.

See the following for more information:

- Understanding BI Publisher's Users, Roles, and Permissions, page 3-2
 - About Privileges to Use Functionality, page 3-3
 - About Catalog Permissions, page 3-5
 - How Functional Privileges and Permissions Work Together, page 3-6
1. In the catalog, navigate to a catalog object required for a role.
 2. Click the **More** link for the object and then click **Permissions** to open the **Permissions** dialog.
 3. Click the **Create** icon to open the **Add Roles** dialog.
 4. Click **Search** to populate the list of **Available Roles**.
 5. Use the **Move** button to move the appropriate roles from the **Available Roles** list to the **Selected Roles** list.
 6. Click **OK**.
 7. Enable the appropriate permissions for the role by selecting the check boxes.
 8. If you have selected a folder: To apply the selections to all items within a folder, select **Apply permissions to items within this folder**.

Integrating with Oracle Database Security

BI Publisher offers integration with Oracle Database security so that you can administer the BI Publisher users with your Oracle Database users. To accomplish this you must define the BI Publisher functional roles in your Oracle Database, assign the roles to your Oracle Database users, and then specify Oracle Database as your security model in the BI Publisher Administration page.

Note: For information on setting up Oracle Database security, see the *Oracle Database Security Guide*.

1. In your Oracle Database, create the following roles to correspond to the BI Publisher functional roles:
 - XMLP_ADMIN – this is the administrator role for the BI Publisher server.

- XMLP_DEVELOPER – allows users to build reports in the system.
 - XMLP_SCHEDULER – allows users to schedule reports.
 - XMLP_ANALYZER_EXCEL – allows users to use the Excel analysis feature.
 - XMLP_ANALYZER_ONLINE – allows users to use the online analysis feature.
 - XMLP_TEMPLATE_BUILDER - allows users to connect to the BI Publisher server from the Template Builder and to upload and download templates.
2. Assign these roles to the appropriate Database roles and users. You may also want to create additional reporting roles that you can utilize when setting up your report privileges on the BI Publisher side. For example, you might create a role called "HUMAN_RESOURCES_MANAGER" that you can assign a Human Resources Folder of reports to. You can then assign that role to any user requiring access to the Human Resources reports.
 3. Ensure to assign the XMLP_ADMIN role to a user with administration privileges, such as SYSTEM.
 4. In the BI Publisher application, log in with Administration privileges. From the Administration tab select **Security Configuration**.
 5. In the **Security Model** section of the page, select Oracle Database from the list. Provide the following connection information:
 - **JDBC Connection String** - example:
`jdbc:oracle:thin:@mycompany.com:1521:orcl`
 - **Administrator Username** and **Administrator Password** - note the following requirements for this user:
 - the user must be granted the XMLP_ADMIN role
 - the user must have privileges to access data from the `dba_users/_roles/_role_privs` tables.
 - **Database Driver Class** - example: `oracle.jdbc.driver.OracleDriver`
 6. Restart the BI Publisher server for the security changes to take effect.

Once you restart the server, the roles to which BI Publisher roles have been assigned will be visible as roles in the BI Publisher security center.

Adding Data Sources to Roles

To view a report generated from a particular data source, a report consumer's role must be granted access to the data source. Similarly, to create a data model based on a particular data source, the report author's role must be granted access to the data source.

To grant a role access to a data source:

1. On the **Administration** tab, under **Security Configuration**, click **Roles and Permissions**.
2. Find the role to which you want to add data sources and click **Add Data Sources**. The **Add Data Sources** page will display.
3. Locate the appropriate data sources in the **Available Data Sources** list and use the shuttle buttons to move the sources to the **Allowed Data Sources** list for the role.
4. Click **Apply**.
5. Repeat for all roles that need access to report data sources.

Granting Catalog Permissions to Roles

For a role to access objects in a folder, you must grant the role permissions to the catalog object. You can grant permissions at the folder level, so that a role has the same access to every object in a folder, or you can assign access individually to each object in a folder.

See the following for more information:

- Understanding BI Publisher's Users, Roles, and Permissions, page 3-2
 - About Privileges to Use Functionality, page 3-3
 - About Catalog Permissions, page 3-5
 - How Functional Privileges and Permissions Work Together, page 3-6
1. In the catalog, navigate to a catalog object required for a role.
 2. Click the **More** link for the object and then click **Permissions** to open the **Permissions** dialog.
 3. Click the **Create** icon to open the **Add Roles** dialog.
 4. Click **Search** to populate the list of **Available Roles**.

5. Use the **Move** button to move the appropriate roles from the **Available Roles** list to the **Selected Roles** list.
6. Click **OK**.
7. Enable the appropriate permissions for the role by selecting the check boxes.
8. If you have selected a folder: To apply the selections to all items within a folder, select **Apply permissions to items within this folder**.

Integrating with Oracle Siebel CRM Security

To configure BI Publisher to integrate with Siebel security, perform the following three general tasks (described in more detail below):

1. Set up BI Publisher roles as Siebel CRM responsibilities.
2. Configure BI Publisher to use Siebel Security.
3. Authorize Siebel responsibilities to access data sources and catalog objects in BI Publisher.

Setting Up BI Publisher Roles as Siebel CRM Responsibilities

1. Using Siebel Administrator credentials, navigate to Administration - Application, and then Responsibilities.
2. In the Responsibilities list, add a new record for each of the BI Publisher functional roles:
 - XMLP_ADMIN – this is the administrator role for the BI Publisher server.
 - XMLP_DEVELOPER – allows users to build reports in the system.
 - XMLP_SCHEDULER – allows users to schedule reports.
 - XMLP_ANALYZER_EXCEL – allows users to use the Excel analyzer feature.
 - XMLP_ANALYZER_ONLINE – allows users to use the online analysis feature.
 - XMLP_TEMPLATE_BUILDER - allows users to connect to the BI Publisher server from the Template Builder and to upload and download templates and grants access to the layout editor.
3. Assign these roles to the appropriate users. You may also want to create additional reporting roles that you can utilize when setting up your report privileges in the BI

Publisher. For example, you might create a role called "EXECUTIVE_SALES" that you can assign a executive-level report folder. You can then assign that role to any user requiring access to the Executive reports.

4. Ensure to assign the XMLP_ADMIN role to a user with administration privileges.

Configure BI Publisher to Use Siebel Security

1. In the BI Publisher application, log in with Administration privileges. From the Administration tab select **Security Configuration**.
2. In the **Security Model** section of the page, select Siebel Security from the list. Provide the following connection information:
 - **Siebel Web Service Endpoint String**
 - **Administrator Username.**
 - **Administrator Password**
3. Restart the BI Publisher server for the security changes to take effect.

When you log back in to BI Publisher, the responsibilities to which you added the BI Publisher functional roles will display in the **Roles and Permissions** page.

Add Data Sources to Roles

To view a report generated from a particular data source, a report consumer's role must be granted access to the data source. Similarly, to create a data model based on a particular data source, the report author's role must be granted access to the data source.

To grant a role access to a data source:

1. On the **Administration** tab, under **Security Configuration**, click **Roles and Permissions**.
2. Find the role to which you want to add data sources and click **Add Data Sources**. The **Add Data Sources** page will display.
3. Locate the appropriate data sources in the **Available Data Sources** list and use the shuttle buttons to move the sources to the **Allowed Data Sources** list for the role.
4. Click **Apply**.
5. Repeat for all roles that need access to report data sources.

Grant Catalog Permissions to Roles

For a role to access objects in a folder, you must grant the role permissions to the catalog object. You can grant permissions at the folder level, so that a role has the same access to every object in a folder, or you can assign access individually to each object in a folder.

See the following for more information:

- Understanding BI Publisher's Users, Roles, and Permissions, page 3-2
 - About Privileges to Use Functionality, page 3-3
 - About Catalog Permissions, page 3-5
 - How Functional Privileges and Permissions Work Together, page 3-6
1. In the catalog, navigate to a catalog object required for a role.
 2. Click the **More** link for the object and then click **Permissions** to open the **Permissions** dialog.
 3. Click the **Create** icon to open the **Add Roles** dialog.
 4. Click **Search** to populate the list of **Available Roles**.
 5. Use the **Move** button to move the appropriate roles from the **Available Roles** list to the **Selected Roles** list.
 6. Click **OK**.
 7. Enable the appropriate permissions for the role by selecting the check boxes.
 8. If you have selected a folder: To apply the selections to all items within a folder, select **Apply permissions to items within this folder**.

Implementing a Digital Signature

This chapter covers the following topics:

- Introduction
- Prerequisites and Limitations
- Implementing a Digital Signature
- Running and Signing Reports with a Digital Signature

Introduction

Oracle BI Publisher supports digital signatures on PDF output documents. Digital signatures enable you to verify the authenticity of the documents you send and receive. Oracle BI Publisher can access your digital ID file from a central, secure location and at runtime sign the PDF output with the digital ID. The digital signature verifies the signer's identity and ensures that the document has not been altered after it was signed.

For additional information on digital signatures, see the following sources:

- Digital ID Introduction by Verisign
 - <http://www.verisign.com/support/tlc/per/whitepaper.htm>
 - http://www.verisign.com/stellent/groups/public/documents/gui_des/005326.pdf
- Digital Signature by Adobe
 - <http://www.adobe.com/security/digsig.html>
- Digital Signatures in PDF and Acrobat
 - http://www.acrobatusers.com/articles/2006/07/digital_signatures/index.php

Prerequisites and Limitations

Prerequisites

Before you can implement digital signatures with Oracle BI Publisher output documents, you need the following:

A digital ID obtained from a public certificate authority or from a private/internal certificate authority (if for internal use only). You must copy the digital ID file to a secure location of the file system on the server that is accessible by the BI Publisher server. See *Obtaining Digital Certificates*, page 6-2 for more information.

Limitations

Use of digital signatures with Oracle BI Publisher output documents has the following limitations:

- Only a single digital ID can be registered with BI Publisher.
- Only reports submitted through BI Publisher's Schedule Report Job interface can include the digital signature.
- The digital signature is enabled at the report level; therefore, all layouts assigned to the same report share the digital signature properties.

Obtaining Digital Certificates

To obtain a digital certificate, do one of the following:

- Purchase one from a certificate authority, such as Verisign, and save it to your computer. This method is recommended because it is easier to verify (and, therefore, trust) the authenticity of the certificate that you purchase. Next, use Microsoft Internet Explorer 7 or later to create a PFX file based on the certificate you purchased. See *Creating PFX Files*, page 6-3.
- Create a self-signed certificate using a software program, such as Adobe Acrobat, Adobe Reader, OpenSSL, or OSDT. This method is less preferred because anyone can create a self-signed certificate. Therefore, it is more difficult to verify and trust the authenticity of the certificate.

Typically, when you create a self-signed certificate using a software program, the program saves the certificate as part of a PFX file. If this is the case, you do not need to create another PFX file (as described in *Creating PFX Files*, page 6-3).

To create a self-signed certificate using Adobe Reader:

1. Open Adobe Reader.
2. On the **Document** menu click **Security Settings**.
3. Select **Digital IDs** on the left.
4. On the toolbar, click **Add ID**.
5. Follow the steps in the **Add Digital ID** wizard. For assistance, refer to the documentation provided with Adobe Reader.
6. When prompted, save your self-signed certificate as part of a PFX file to an accessible location on your computer.

After you create your self-signed certificate as part of a PFX file, you can use the PFX file to sign PDF documents by registering it with BI Publisher. See *Implementing a Digital Signature*, page 6-4.

Creating PFX Files

If you obtained a digital certificate from a certificate authority, you can create a PFX file using that certificate and Microsoft Internet Explorer 7 or later.

Note: If you created a self-signed certificate using a software program such as Adobe Reader, it is likely that the program created the certificate in a PFX file. If this is the case, you don't have to create another PFX file. You can use the one you have.

To create a PFX file with Microsoft Windows Explorer 7 or later:

1. Ensure your digital certificate is saved on your computer.
2. Open Microsoft Internet Explorer.
3. On the **Tools** menu, click **Internet Options** and then click the **Content** tab.
4. Click **Certificates**.
5. In the **Certificates** dialog, click the tab that contains your digital certificate and then click the certificate.
6. Click **Export**.
7. Follow the steps in the **Certificate Export Wizard**. For assistance, refer to the documentation provided with Microsoft Internet Explorer.
8. When prompted, select **Use DER encoded binary X.509** as your export file format.

9. When prompted, save your certificate as part of a PFX file to an accessible location on your computer.

After you create your PFX file, you can use it to sign PDF documents. See *Implementing a Digital Signature*, page 6-4.

Implementing a Digital Signature

Procedure Overview

The following steps provide an overview of the tasks required to set up and sign your output PDF documents with a digital signature:


1. Register the digital ID in the BI Publisher Administration page.
2. Specify the Roles that are authorized to sign documents.
3. (Optional for PDF templates) Add a signature field to the PDF template in which to place the digital signature at runtime. See 'Adding or Designating a Field for Digital Signature, *Oracle Fusion Middleware Report Designers Guide for Business Intelligence Publisher* for instructions on designating a specific field in a PDF template for the digital signature.
4. Enable Digital Signature for the report in the Report Properties, page 12-7 dialog and specify the position to place the digital signature on the completed document. This can be a signature field (for PDF templates), general location (top left, top center, or top right), or you can specify x and y coordinates.
5. Log in to BI Publisher as a user with an authorized role and submit the report through the BI Publisher scheduler, choosing PDF output. When the report completes it will be signed with your digital ID in the specified location of the document.

Registering Your Digital Signature ID and Assigning Authorized Roles

BI Publisher supports the identification of a single digital ID file. Register the digital ID in the BI Publisher Administration page as follows:

1. On the **Administration** tab, under **Security Center**, click **Digital Signature**.
2. On the **Digital Signature** subtab, enter the file path to the digital ID file and enter the password for the digital ID.
3. Enable the Roles that will have the authority to sign documents with this digital ID. Use the shuttle buttons to move **Available Roles** to the **Allowed Roles** list.

4. Click **Apply**. The following figure shows the **Digital Signature** subtab:

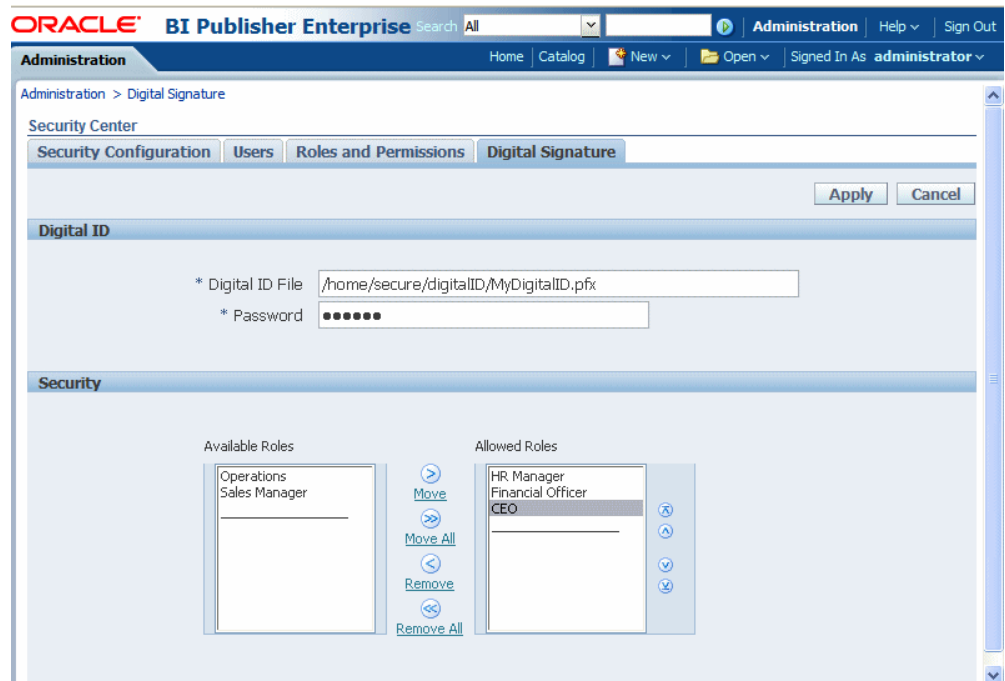

Specifying the Signature Display Field or Location

You must specify the location for the digital signature to appear in the completed document. The methods available depend on whether your template type is PDF or RTF.

If your template is PDF, you have the following options:

- specify a template field in which to put the digital signature
- use the Report Properties dialog to specify a location (x,y coordinates) for the signature to appear in your final document

If your template is RTF:

- use the Report Properties dialog to specify a location (x,y coordinates) for the signature to appear in your final document

Specifying a Template Field in a PDF Template for the Digital Signature

See the chapter: *Creating a PDF Template*, topic: "Adding or Designating a Field for a Digital Signature" in the *Oracle Fusion Middleware Report Designer's Guide for Oracle Business Intelligence Publisher* for instructions on including a field in your PDF template for the digital signature.

Specifying the Location for the Digital Signature Using the Report Properties (RTF and PDF Templates)

When you specify a location in the document to place the digital signature, you can either specify a general location (Top Left, Top Center, or Top Right) or you can specify x and y coordinates in the document. You can also specify the field height and width. This is done through properties on the Runtime Configuration page. Therefore you do not need to alter the template to include a digital signature.

1. In the catalog, navigate to the report.
2. Click the **Edit** link for the report to open the report for editing.
3. Click **Properties** and then click the **Formatting** tab.
4. Scroll to the **PDF Digital Signature** group of properties.
5. Set **Enable Digital Signature** to **True**.
6. Specify the location in the document where you want the digital signature to appear by setting the appropriate properties as follows (note that the signature is inserted on the first page of the document only):

- **Existing signature field name** – does not apply to this method.
- **Signature field location** – provides a list containing the following values:

Top Left, Top Center, Top Right

Select one of these general locations and BI Publisher will place the digital signature in the output document sized and positioned appropriately.

If you set this property, do not enter X and Y coordinates or width and height properties.

- **Signature field X coordinate** – using the left edge of the document as the zero point of the X axis, enter the position in points to place the digital signature from the left.

For example, to place the digital signature horizontally in the middle of an 8.5 inch by 11 inch document (that is, 612 points in width and 792 points in height), enter 306.

- **Signature field Y coordinate** – using the bottom edge of the document as the zero point of the Y axis, enter the position in points to place digital signature from the bottom.

For example, to place the digital signature vertically in the middle of an 8.5 inch by 11 inch document (that is, 612 points in width and 792 points in height), enter 396.

- **Signature field width** – enter in points the desired width of the inserted digital signature field. This applies only if you are setting the X and Y coordinates.
- **Signature field height** – enter in points the desired height of the inserted digital signature field. This applies only if you are setting the X and Y coordinates.

The following figure shows a report configured to place the digital signature at specific x and y coordinates in the document:

Properties	Report Value	Server Value
Allowed printing level		0
Use only one shared resources object for all pages		true
PDF Digital Signature		
Enable Digital Signature	True	false
Existing signature field name		null
Signature field location		null
Signature field X coordinate	306	0
Signature field Y coordinate	700	0
Signature field width	72	0
Signature field height	36	0
RTF Output		
Enable change tracking		false
Protect document for tracked changes		false

Running and Signing Reports with a Digital Signature

Users assigned a role with the digital signature privilege can attach the digital signature to their generated reports configured to include the digital signature. The digital signature can only be inserted on scheduled reports.

1. Log in to BI Publisher as a user with a role granted digital signature privileges.
2. In the catalog, navigate to the report that has been enabled for digital signature and click **Schedule**.
3. Complete the fields in the **Schedule Report Job** page, selecting PDF output, and then submit the job.
4. The completed PDF will display the digital signature.

Part 3

**Administering Oracle Business Intelligence
Publisher**

Configuring the Scheduler

This chapter covers the following topics:

- Overview
- Understanding the BI Publisher Scheduler
- Setup Considerations
- About the Scheduler Configuration
- Configuring Processors and Processor Threads
- Adding Managed Servers
- Scheduler Diagnostics

Overview

The architecture of the 11g BI Publisher Scheduler uses Java Messaging Service (JMS) queue technology. This architecture enables you to add multiple BI Publisher servers to a cluster and then dedicate each server to a particular function: report generation, document generation, or specific delivery channels. This increases the flexibility to scale up report processing servers for high volume scheduled jobs.

Topics in this chapter include:

- Understanding the BI Publisher Scheduler, page 7-2
- Set Up Considerations, page 7-4
- About the Scheduler Configuration, page 7-5
- Configuring Processors and Processor Threads, page 7-6
- Adding Manager Servers, page 7-7
- Scheduler Diagnostics, page 7-12


Understanding the BI Publisher Scheduler

Architecture

The architecture of the BI Publisher Scheduler uses JMS queues and topics to provide a highly scalable, highly performing and robust report scheduling and delivery system.

Oracle Fusion Applications uses Enterprise Scheduler Services as the scheduling engine. All other implementations use the Quartz scheduling engine.

The following diagram displays the scheduler architecture:

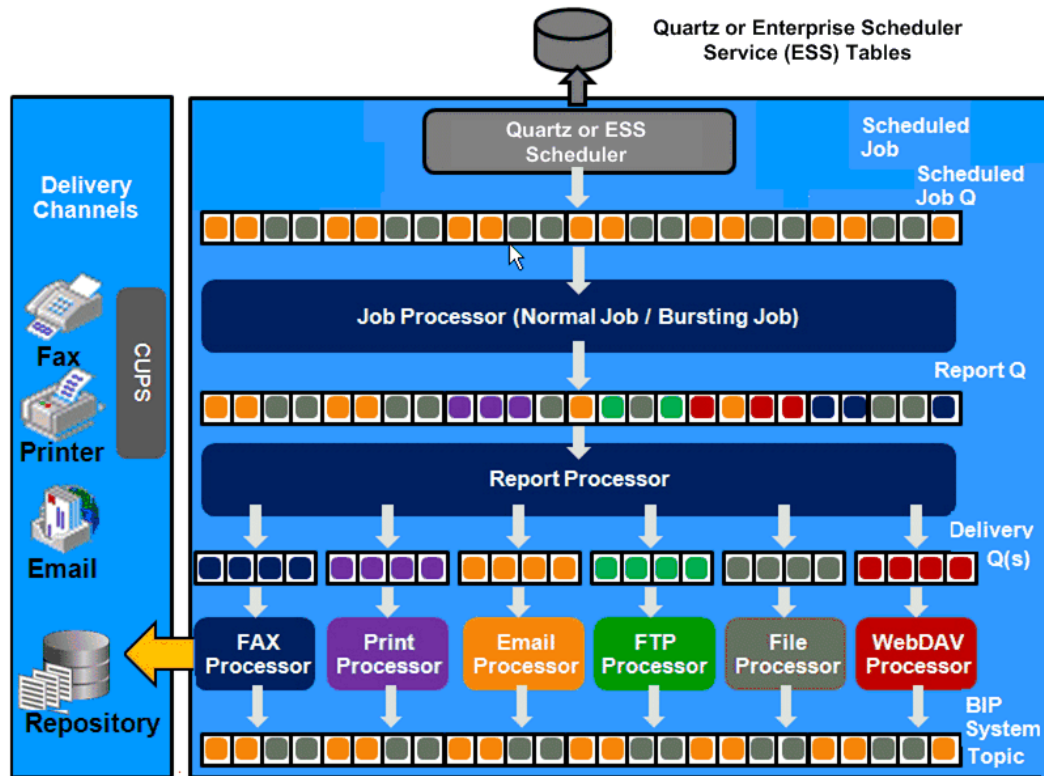

Following describes the tasks performed by the scheduler when a job is submitted:

1. Submit Job
 - Stores job information and triggers in Quartz or Enterprise Scheduler Services tables
2. Job Processor
 - When Quartz or Enterprise Scheduler Services trigger is fired, puts job information in Scheduler job queue

3. Bursting Engine / Batch Job Process

- Bursting Engine Listener
 - Takes the scheduled job information from the queue
 - Extracts data from data source
 - Splits data as per bursting split by definition
 - Stores data temporarily in temp folder
 - Puts report metadata into Report Queue
- Batch Job Process
 - Takes the scheduled job information from the queue
 - Extracts data from data source
 - Stores data temporarily in temp folder
 - Puts report metadata into Report Queue

4. FO Report Processor

- Listens to Report Queue
- Generates report based on metadata
- Stores report in shared TEMP directory
- Puts report delivery information in Delivery Queue

5. Delivery (E-mail, File, FTP) Processors

- Listen to Delivery queue
- Call delivery API to deliver to different channels

- BI Publisher (BIP) System Topic

The BIP System Topic publishes the runtime status and health of the scheduling engine. The topic publishes the status of all instances, the thread status of messages in the JMS queues, the status of all scheduler configurations such as database configuration, JNDI configuration of JMS queues and so on.

About Clustering

BI Publisher clustering support enables you to add server instances on demand to handle processing and delivery load. In a clustered implementation, the report repository and the scheduler database are shared across the multiple instances; also, the JMS queues for scheduling and JMS topic for publishing diagnostic information are shared across the server by registering JMS queues and topics via JNDI services.

Each managed server instance points to the same report repository. In each managed server instance all the processes (Job Processor, Report Processor, Email Processor, FTP Processor, Fax Processor, File Processor, Print Processor, and WebDav Processor) are configured. Therefore the moment a server instance pointing to the same repository is deployed, it is added to the cluster and all the processors in this instance are ready to run.

You can select the process that you want to enable on any server instance, thereby utilizing the resources optimally. Moreover, if there is a demand to increase job throughput, you can add more instances for report processing. Similarly, if e-mail delivery is the most preferred delivery channel, more instances can be added to manage e-mail delivery.

For more information about clustering and high availability, see the *Oracle Fusion Middleware High Availability Guide 11g Release 1 (11.1.1)*. Oracle Fusion Applications customers see the *Oracle Fusion Applications Enterprise Deployment Guide*.

How Failover Works

BI Publisher provides a failover mechanism so that no report fails to deliver due to server unavailability. Achieve this by balancing each process of the scheduler using two or more nodes in a cluster thereby ensuring that a failure of any node will be backed up by the second node. For example, by enabling the Job Processor in two nodes, in the event of failure of one node, the second node will be able to process the job queue.

Important: If a node goes down, the other nodes will continue to service the queue. However, if a report job is in one of the following stages of execution: data retrieval, data formatting, or report delivery, the job will be marked as failed, and must be manually resubmitted.

Setup Considerations

Following are topics to consider before setting up the scheduler:

Choosing JNDI or JDBC Connection

By default, the BI Platform installer configures the WebLogic JNDI connection URL.

JDBC is not recommended for production use. JDBC should only be used for low volume local testing.

Supported JMS Providers

When you install BI Publisher, the scheduler is automatically configured to use WebLogic JMS. To use configure BI Publisher to use ActiveMQ instead, see *Configuring BI Publisher for ActiveMQ*, page B-1.

About the Scheduler Configuration

After you install BI Publisher using the BI Platform Installer and start up the servers, the BI Publisher scheduler will be running and the following is configured:

- The scheduler schema is installed to the database by the Repository Creation Utility as a pre-install step.
- JMS is configured in your server for BI Publisher.
- The WebLogic JNDI URL is configured.
- Default threads per processor is set to 5.

See the *Oracle Fusion Middleware Installation Guide for Oracle Business Intelligence* for more information on configurations performed by the Oracle BI Platform Installer.

You can see this configuration in the **Scheduler Configuration** page: From the **Administration** page, under **System Maintenance**, click **Scheduler Configuration**. The following screenshot shows the Database Connection and JMS Configuration regions of the Scheduler Configuration page:

Scheduler Selection	
Scheduler	Quartz
Quartz Clustering	<input type="checkbox"/>
Database Connection	
Database Connection Type	jndi
JNDI Name	jdbc/bip_datasource
	<input type="button" value="Test Connection"/> <input type="button" value="Install Schema"/>
JMS Configuration	
JMS Provider	WebLogic
WebLogic JNDI URL	t3://localhost:9704
Threads Per JMS Processor	5
Shared Directory	/scratch/apphome/xmlpserver/wjms/shared
	<input type="button" value="Test JMS"/>

Configuring the Shared Directory

The **Shared Directory** is used to temporarily store data and files used by the scheduler while jobs are executing. After a job completes, the temporary data for the job is deleted. If the BI Publisher scheduler is configured to run on different nodes or machines, you must define this directory. The directory is used to exchange data and document information among all the BI Publisher nodes and therefore must be accessible by all BI Publisher nodes.

The size of the directory depends on the total size of the job data, output documents, and the number of concurrent jobs. The directory should be big enough to hold all the XML data and documents for all the parallel running jobs. If BI Publisher runs on different machines while this directory is not configured, the scheduler may fail.

If BI Publisher runs on a single machine, the directory setup is optional. BI Publisher will use the application server's temporary directory to store this data.

Configuring Processors and Processor Threads

For each cluster instance that you have configured, a processor configuration table will display. Use the tables to enable and disable processors and specify threads for each processor.

The default number of threads for each processor is set by the **Threads per JMS Processor** property under **JMS Configuration** (shown above). Edit the threads for a specific processor in the **Cluster Instances** region by updating the **Number Threads** setting. Note that processors that use the default setting will show no entry in the table. Enter a **Number Threads** value only to set a thread count for a particular processor to

differ from the default.

JMS Processor	Enable	Number Threads
JobProcessor	<input checked="" type="checkbox"/>	
ReportProcessor	<input checked="" type="checkbox"/>	
EmailProcessor	<input checked="" type="checkbox"/>	
FileProcessor	<input checked="" type="checkbox"/>	
FTPProcessor	<input checked="" type="checkbox"/>	
PrintProcessor	<input checked="" type="checkbox"/>	
WebDavProcessor	<input checked="" type="checkbox"/>	
FaxProcessor	<input checked="" type="checkbox"/>	

The optimum number of threads per processor will depend on the requirements of your system. You can use the **Scheduler Diagnostics** page to help in assessing load in your system. See Scheduler Diagnostics, page 7-12.

To add managed servers to your system, see Adding Managed Servers, page 7-7.


Adding Managed Servers

Add managed servers in the Oracle WebLogic Administration Console and then configure the cluster instances in the BI Publisher Administration page.

Adding a Managed Server

For detailed information on using the Oracle WebLogic Administration Console see *Oracle WebLogic Server Administration Console Help* system. For additional information about Fusion Middleware Control and how to use it, see *Oracle Fusion Middleware Administrator's Guide*.

1. Access the Oracle WebLogic Administration Console using one of the following methods:
2. Click **Lock & Edit**.
3. Under **Domain Structure**, expand **Environment** and click **Servers**.

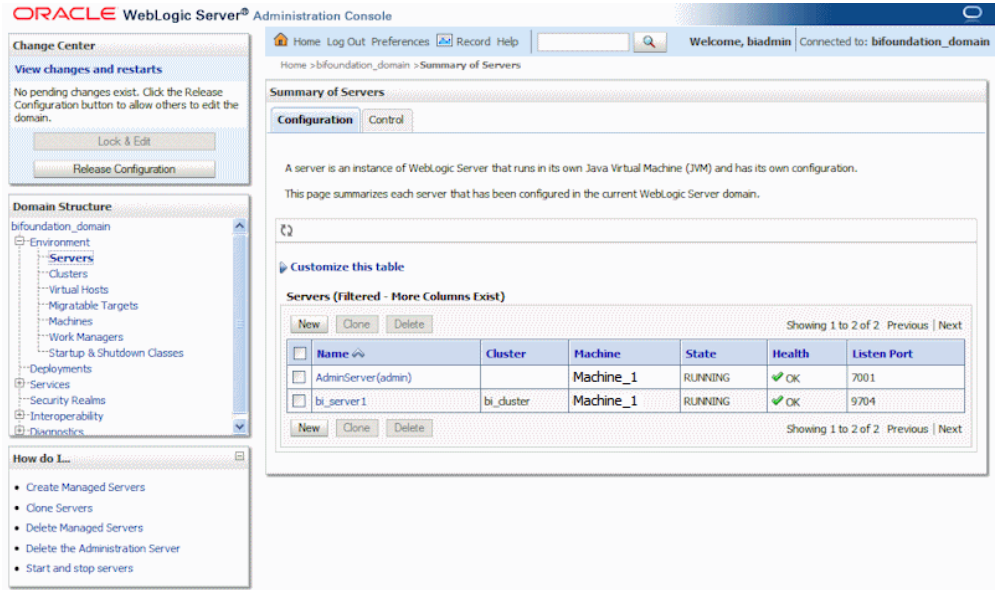

4. On the **Servers** table, click **New**.
5. On the Create a New Server: Server Properties page:

Administration Console

Home Log Out Preferences Record Help Welcome, biadmin Connected to: bifoundation_domain

Home > bifoundation_domain > Summary of Servers

Create a New Server

Back Next Finish Cancel

Server Properties

The following properties will be used to identify your new server.
* Indicates required fields

What would you like to name your new server?

* **Server Name:**

Where will this server listen for incoming connections?

Server Listen Address:

* **Server Listen Port:**

Should this server belong to a cluster?

No, this is a stand-alone server.

Yes, make this server a member of an existing cluster.

Select a cluster:

Yes, create a new cluster for this server.

- Enter the name of the server in the Name field.
 - In **Listen Port**, enter the port number from which you want to access the server instance.
 - Select **Yes, make this server a member of an existing cluster**.
Select the bi_cluster from the list.
 - Click **Next**.
6. Review the configuration options you have chosen.
 7. Click **Finish**.
 8. The new server displays in the **Servers** table.

Summary of Servers

Configuration Control

A server is an instance of WebLogic Server that runs in its own Java Virtual Machine (JVM) and has its own configuration.
This page summarizes each server that has been configured in the current WebLogic Server domain.

🔍

[Customize this table](#)

Servers (Filtered - More Columns Exist)

New Clone Delete Showing 1 to 3 of 3 Previous | Next

<input type="checkbox"/>	Name ↕	Cluster	Machine	State	Health	Listen Port
<input type="checkbox"/>	AdminServer(admin)		Machine_1	RUNNING	✔ OK	7001
<input type="checkbox"/>	biserver-2	bi_cluster		Unknown		9705
<input type="checkbox"/>	bi_server1	bi_cluster	Machine_1	RUNNING	✔ OK	9704

New Clone Delete Showing 1 to 3 of 3 Previous | Next

- Click the server name to open the **Settings** page.

Settings for biserver-2

Configuration Protocols Logging Debug Monitoring Control Deployments Services Security Notes

General Cluster Services Keystores SSL Federation Services Deployment Migration Tuning Overload

Health Monitoring Server Start

Save

Use this page to configure general features of this server such as default network communications.

Name: biserver-2 An alphanumeric name for this server instance. [More Info...](#)

Machine: (None) The WebLogic Server host computer (machine) on which this server is meant to run. [More Info...](#)

Cluster: Machine_1 The cluster, or group of WebLogic Server instances, to which this server belongs. [More Info...](#)

Listen Address: The IP address or DNS name this server uses to listen for incoming connections. [More Info...](#)

Listen Port Enabled Specifies whether this server can be reached through the default plain-text (non-SSL) listen port. [More Info...](#)

Listen Port: 9705 The default TCP port that this server uses to listen for regular (non-SSL) incoming connections. [More Info...](#)

SSL Listen Port Enabled Indicates whether the server can be reached through

10. Select a **Machine** for the new server.
11. Click **Save**.
12. Click **Activate Changes**.
13. Start the new server.

Configure the Processors in BI Publisher

After the new managed server has been started, the set of processors for that server display in the BI Publisher, as shown in the following figure:

Cluster Instances

Instance Name
 Instance ID Instance.7261

JMS Processor	Enable	Number	Threads
JobProcessor	<input checked="" type="checkbox"/>	<input type="text"/>	<input type="text"/>
ReportProcessor	<input checked="" type="checkbox"/>	<input type="text"/>	<input type="text"/>
EmailProcessor	<input checked="" type="checkbox"/>	<input type="text"/>	<input type="text"/>
FileProcessor	<input checked="" type="checkbox"/>	<input type="text"/>	<input type="text"/>
FTPProcessor	<input checked="" type="checkbox"/>	<input type="text"/>	<input type="text"/>
PrintProcessor	<input checked="" type="checkbox"/>	<input type="text"/>	<input type="text"/>
WebDavProcessor	<input checked="" type="checkbox"/>	<input type="text"/>	<input type="text"/>
FaxProcessor	<input checked="" type="checkbox"/>	<input type="text"/>	<input type="text"/>

Instance Name
 Instance ID Instance.7622

JMS Processor	Enable	Number	Threads
JobProcessor	<input checked="" type="checkbox"/>	<input type="text"/>	<input type="text"/>
ReportProcessor	<input checked="" type="checkbox"/>	<input type="text"/>	<input type="text"/>
EmailProcessor	<input checked="" type="checkbox"/>	<input type="text"/>	<input type="text"/>
FileProcessor	<input checked="" type="checkbox"/>	<input type="text"/>	<input type="text"/>
FTPProcessor	<input checked="" type="checkbox"/>	<input type="text"/>	<input type="text"/>
PrintProcessor	<input checked="" type="checkbox"/>	<input type="text"/>	<input type="text"/>
WebDavProcessor	<input checked="" type="checkbox"/>	<input type="text"/>	<input type="text"/>
FaxProcessor	<input checked="" type="checkbox"/>	<input type="text"/>	<input type="text"/>

You can now configure the threads appropriately for your system load.

Scheduler Diagnostics

The Scheduler diagnostics page provides the runtime status of the scheduler. It provides status of its JMS configuration, JMS queues, Cluster instance status, Scheduler Database status, Toplink status, and Scheduler (Quartz or Enterprise Scheduler Service) status.

The Diagnostics page displays how many scheduled report requests have been received by the JMS queues, how many of them have failed and how many are still running. The JMS status can be viewed at the cluster-instance level enabling you to decide whether to add more instances to scale up by one or more of these JMS processors.

For example, if there are too many requests queued up for the e-mail processor in one instance, you can consider adding another instance and enabling it to handle e-mail processing. Similarly, if there are very large reports being processed and showing in the Report Process queue in running status, then you can add another instance to scale up

the Report Process capability.

Also, the Scheduler Diagnostics page reflects the status of each component to show if any component is down. You can see the connection string or JNDI name to the database, which cluster instance associates to which managed server instance, Toplink connection pool configuration, and so on.

If an instance shows a failed status, you can recover the instance and with the failover mechanism of the JMS set up in the cluster, no jobs submitted will be lost. Once the server instance is brought back, it will immediately be available in the cluster for service. The instance removal and addition will reflect dynamically on the diagnostic page.

When an instance is added to the cluster, the Scheduler Diagnostics page immediately recognizes the new instance and displays the status of the new instances and all the threads running on that instance. This provides a powerful monitoring capability to the administrator to trace and resolve issues in any instance or any component of the scheduler.

The Scheduler Diagnostics page provides information on the following components:

- JMS
- Cluster
- Database
- Scheduler Engine

Administration > Scheduler Diagnostics

System Maintenance

Server Configuration | Scheduler Configuration | Scheduler Diagnostics

Last Refreshed **June 9, 2010 8:18:00 PM UTC** [Diagnose](#)

Result: Passed

Diagnostic Item	Value	Status	Details
Enterprise Scheduler		Passed	
--JMS		Passed	
----JMS Cluster Config	/scratch/apphome/xmlpserver/repository/Admin/Scheduler/jms_cluster_config.properties	Passed	
-----JMS_PROVIDER_TYPE	WebLogic	Info	WebLogic JMS is selected.
-----JMS_WEBLOGIC_VERSION	10.3	Info	
-----JMS_WEBLOGIC_JNDI_FACTORY	weblogic.jndi.WLInitialContextFactory	Info	
-----JMS_WEBLOGIC_JNDI_URL	t3://example.com:7001	Info	
-----BIP_CONNECTION_FACTORY_NAME	BIP.JMS.CF	Info	
-----BIP_SYSTEM_TOPIC_NAME	BIP.System.T	Info	
-----BIP_BURST_JOB_QUEUE_NAME	BIP.Burst.Job.Q	Info	
-----BIP_BURST_REPORT_QUEUE_NAME	BIP.Burst.Report.Q	Info	
-----BIP_DELIVERY_EMAIL_QUEUE_NAME	BIP.Delivery.Email.Q	Info	
-----BIP_DELIVERY_FILE_QUEUE_NAME	BIP.Delivery.File.Q	Info	
-----BIP_DELIVERY_FTP_QUEUE_NAME	BIP.Delivery.FTP.Q	Info	
-----BIP_DELIVERY_PRINT_QUEUE_NAME	BIP.Delivery.Print.Q	Info	
-----BIP_DELIVERY_WEBDAV_QUEUE_NAME	BIP.Delivery.WebDAV.Q	Info	
-----BIP_DELIVERY_FAX_QUEUE_NAME	BIP.Delivery.Fax.Q	Info	
-----NUMBER_THREADS_PER_PROCESSOR	5	Info	
-----JMS_Shared_Temp_Directory	/scratch/apphome/xmlpserver/wljms/shared	Info	
----JMS Runtime		Passed	
-----Topic - BIP.System.T		Passed	

The **JMS** section provides information on the following:

- **JMS Cluster Config:** This section provides configuration information for JMS setup:
 - provider type (Weblogic / ActiveMQ)
 - Weblogic version
 - Weblogic JNDI Factory
 - JNDI URL for JMS
 - Queue names
 - Temporary directory
- **JMS Runtime:** This provides runtime status of all JMS queues and topics

----JMS Runtime		Passed	
-----Topic - BIP.System.T		Passed	
-----Queue - BIP.Burst.Job.Q	0 pending	Passed	
-----Queue - BIP.Burst.Report.Q	0 pending	Passed	
-----Queue - BIP.Delivery.Email.Q	0 pending	Passed	
-----Queue - BIP.Delivery.File.Q	0 pending	Passed	
-----Queue - BIP.Delivery.FTP.Q	0 pending	Passed	
-----Queue - BIP.Delivery.Print.Q	0 pending	Passed	
-----Queue - BIP.Delivery.WebDAV.Q	0 pending	Passed	
-----Queue - BIP.Delivery.Fax.Q	0 pending	Passed	

The **Cluster** section provides details on the cluster instance. Use this information to understand the load on each processor:

--Cluster		Passed	
----Instance - Cluster 369.127028		Passed	
-----JMS Instance Config	/user_projects/domains/base_domain/servers/AdminServer/tmp/_WL_user/xmlpserver/war/WEB-INF/jms_config.xml	Passed	
-----JMSWrapper	Started (Thu Jul 01 07:10:18 UTC 2010)	Passed	
-----JMSClient - system	Started; BIP.System.T: 3458 sent, 0 failed	Passed	
-----JMSProcessor - ClusterMessageListener	Started; BIP.System.T; 1 threads; 3458 received, 0 failed, 0 running	Passed	
-----JMSClient - jmsclient_producer	Started; BIP.Burst.Job.Q: 39 sent, 0 failed; BIP.Burst.Report.Q: 95 sent, 0 failed; BIP.Delivery.Email.Q: 82 sent, 0 failed	Passed	
-----JMSClient - jmsclient_schedule	Started	Passed	
-----JMSProcessor - JobProcessor	Started; BIP.Burst.Job.Q; 5 threads; 39 received, 0 failed, 0 running	Passed	
-----JMSProcessor - ReportProcessor	Started; BIP.Burst.Report.Q; 5 threads; 95 received, 0 failed, 0 running	Passed	
-----JMSClient - jmsclient_delivery	Started	Passed	
-----JMSProcessor - EmailProcessor	Started; BIP.Delivery.Email.Q; 5 threads; 82 received, 0 failed, 0 running	Passed	
-----JMSProcessor - FileProcessor	Started; BIP.Delivery.File.Q; 5 threads; 0 received, 0 failed, 0 running	Passed	
-----JMSProcessor - FTPProcessor	Started; BIP.Delivery.FTP.Q; 5 threads; 0 received, 0 failed, 0 running	Passed	
-----JMSProcessor - PrintProcessor	Started; BIP.Delivery.Print.Q; 5 threads; 0 received, 0 failed, 0 running	Passed	
-----JMSProcessor - WebDavProcessor	Started; BIP.Delivery.WebDAV.Q; 5 threads; 0 received, 0 failed, 0 running	Passed	
-----JMSProcessor - FaxProcessor	Started; BIP.Delivery.Fax.Q; 5 threads; 0 received, 0 failed, 0 running	Passed	

- JMS instance config
- JMS Wrapper
- JMS Client – System - provides status of the BIP System topic. The scheduler diagnostic page is a subscriber to this topic.
- JMS Client_producer - not used in this release.
- JMS Client_schedule - provides status of the job processor and report processor, each processor showing number of active threads, number of messages received, number of messages failed, and number of messages running.
- JMS Client_delivery - provides status of different delivery processors as listeners, each delivery processor showing number of active threads, number of messages received, number of messages failed, and number of messages running.

The **Database** section provides information on:

- Database Config - connection type, JNDI Name, or connection string

- Toplink Config - connection pooling, logging level
- Database Schema

--Database		Passed	
----Database Config	/scratch/apphome/xmlpserver/repository/Admin/Scheduler/quartz-config.properties	Passed	
-----Connection Type	jdbc	Info	
-----Database Type	oracle.toplink.platform.database.oracle.Oracle11Platform	Info	
-----Connection String	jdbc:oracle:thin:@10.100.100.30:1521:ord	Info	
-----User Name	BIPUSER2	Info	
-----Database Driver	oracle.jdbc.OracleDriver	Info	
----Toplink Config	/scratch/apphome/xmlpserver/repository/Admin/Scheduler/quartz-config.properties	Passed	
-----Toplink Mapping File	META-INF/toplink_mappings.xml	Info	
-----Toplink Logging	severe	Info	
-----Toplink Connection Policy Lazy	false	Info	
-----Toplink Read Connection Pool	read-connection-pool, name: read-pool, max-connections: 20, min-connections: 10	Info	
-----Toplink Write Connection Pool	write-connection-pool, name: default, max-connections: 20, min-connections: 10	Info	
----Database Schema		Passed	

The **Quartz** section provides information on:

- Quartz Configuration
- Quartz Initialization

Note: This section will not display for Oracle Fusion Applications implementations.

--Quartz		Passed	
----Quartz Config	/scratch/apphome/xmlpserver/repository/Admin/Scheduler/quartz-config.properties	Passed	
-----org.quartz.dataSource.myDS.maxConnections	5	Info	
-----org.quartz.scheduler.instanceId	AUTO	Info	
-----org.quartz.scheduler.instanceName	BIPublisherScheduler	Info	
-----org.quartz.dataSource.myDS.user	BIPUSER2	Info	
-----org.quartz.jobStore.tablePrefix	QRTZ_	Info	
-----org.quartz.jobStore.class	org.quartz.impl.jdbcjobstore.JobStoreTX	Info	
-----org.quartz.dataSource.myDS.URL	jdbc:oracle:thin:@10.144.177.30:1521:ord	Info	
-----org.quartz.threadPool.class	org.quartz.simpl.SimpleThreadPool	Info	
-----org.quartz.jobStore.useProperties	false	Info	
-----org.quartz.threadPool.threadPriority	5	Info	
-----org.quartz.jobStore.isClustered	false	Info	
-----org.quartz.jobStore.misfireThreshold	60000	Info	
-----org.quartz.threadPool.threadCount	3	Info	
-----org.quartz.threadPool.threadsInheritContextClassLoaderOfInitializingThread	true	Info	
-----org.quartz.jobStore.driverDelegateClass	org.quartz.impl.jdbcjobstore.oracle.OracleDelegate	Info	
-----org.quartz.dataSource.myDS.driver	oracle.jdbc.OracleDriver	Info	
-----org.quartz.jobStore.dataSource	myDS	Info	
----Quartz Initialization		Passed	

Configuring Server Properties

Overview

This chapter covers server configuration settings under the **System Maintenance** region of the Administration page. It includes the following:

- Setting the Path to the Configuration Folder, page 8-1
- Configuring the Catalog, page 8-2
- Setting General Properties, page 8-3
- Setting Caching Specifications, page 8-5
- Setting Retry Properties for Database Failover, page 8-6

Setting the Path to the Configuration Folder

The Configuration folder stores the files that contain your server configuration settings, for example, your data source connections, delivery server definitions, and scheduler settings.

The path to the Configuration folder is stored in the `xmlp-server-config.xml` configuration file.

When you install BI Publisher, this is automatically configured to

```
${xdo.server.config.dir}/repository
```

```


xmlp-server-config.xml
1  <?xml version = '1.0' encoding = 'UTF-8'?>
2  <xmlpConfig xmlns="http://xmlns.oracle.com/oxp/xmlp">
3    <resource>
4      <saw path="/">
5        <connection>
6          <version>v6</version>
7          <retries>1</retries>
8          <mode>tcp</mode>
9          <sessionTimeout>90</sessionTimeout>
10         </connection>
11       </saw>
12     </resource>
13     <config>
14       <file path="{xdo.server.config.dir}/repository"/>
15     </config>
16   </xmlpConfig>
17

```

The environment variable `{xdo.server.config.dir}` is used to store the path to the location of the `xmlp-server-config.xml` configuration file. By default both the BI Publisher configuration folder and the `xmlp-server-config.xml` file are installed to `<DOMAIN_HOME>/config/bipublisher`.

For example:

`/OBI_HOME/user_projects/domains/bifoundation_domain/config/bipublisher`

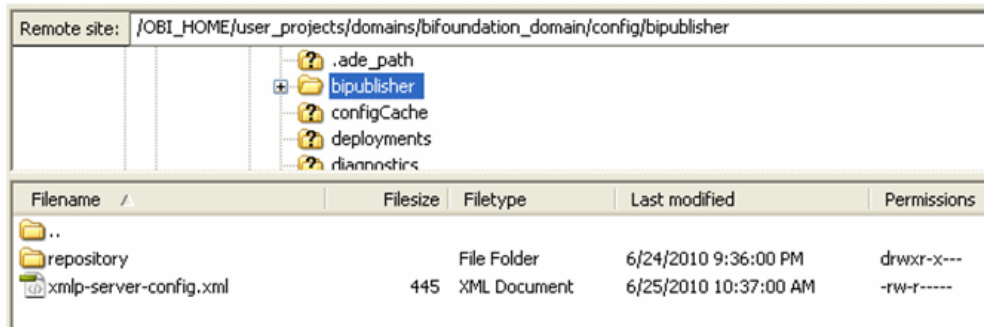

Configuring the Catalog

BI Publisher supports the following catalog types:

- Oracle BI Publisher - File System, page 8-3

The Oracle BI Publisher file system option is for installations of BI Publisher that are not integrated with Oracle Business Intelligence Enterprise Edition.

- Oracle BI EE Catalog, page 8-3

If you install BI Publisher with the Oracle Business Intelligence Enterprise Edition, the catalog will be automatically configured to use the shared Oracle BI Presentation catalog.

Configuring the Oracle BI Publisher File System Catalog

Important: When using file systems such as NFS, Windows, or NAS for your repository, you must ensure that your file system is secured.

When you install BI Publisher, the catalog will be configured by default to:

```
${xdo.server.config.dir}/repository
```

To change the location for your repository, perform the following:

1. Under **Catalog**, select **Oracle BI Publisher - File System** as the **Catalog Type**.
2. Enter the absolute **Path**.
3. Apply your changes and restart your BI Publisher application.

Important: Note that because the repository is in the file system, the case sensitivity of folder and report names is determined by the platform on which you are running BI Publisher. For Windows-based environments, the repository object names will not be case sensitive. For Unix-based environments, the repository object names will be case sensitive.

Configuring BI Publisher to Use the Oracle BI EE Catalog

If you installed BI Publisher as part of the Oracle Business Intelligence Enterprise Edition BI Publisher will be automatically configured to use the shared Oracle BI EE (Oracle BI Presentation) catalog.

For prerequisites and steps for manually integrating BI Publisher with Oracle BI Enterprise Edition, see Integration Reference for Oracle Business Intelligence Enterprise Edition, page C-1.

Setting General Properties

The general properties region includes the following settings:

- **System Temporary Directory**
- **Report Scalable Threshold**

- **Database Fetch Size**

The System Temporary Directory

This setting is optional. As long as the disk drive where BI Publisher is deployed has enough space to run BI Publisher, it is not required.

About Temporary Files

BI Publisher creates the following types of temporary and cache files:

Temporary files:

- Temporary files created by the formatting engines (FO processor, PDF Form Processor, PDF generators and so on)
- Data Files

These files are removed after the reports generate successfully.

Dynamic image files for HTML output:

- Dynamic charts
- Embedded images in RTF templates

Cache files:

- Data cache
- LOV (List of Values) cache
- Document Cache
- XSL Cache from RTF templates

Setting the System Temporary Directory

If you do not specify a temporary directory here, temporary files and dynamic image files are generated under `{bip_deployment_directory}/xdo/tmp`. Cache files are generated under `{bip_deployment_directory}/xdo/cache`.

When you configure a System Temporary Directory using this field, for example: `"/disk1/BIP_Temp"`, the BI Publisher server automatically creates the following directories:

- `/disk1/BIP_Temp/xdo`
- `/disk1/BIP_Temp/xdo/tmp`

- /disk1/BIP_Temp/xdo/cache

Temporary files are generated under /disk1/BIP_Temp/xdo/tmp.

Cache files are generated under /disk1/BIP_Temp/xdo/cache.

Dynamic image files are still created in the {*bip_deployment_directory*}/xdo/tmp directory and are not affected by this configuration.

Whenever the BI Publisher server is restarted, any files under /disk1/BIP_Temp/xdo are removed.

Sizing the System Temporary Directory

Sizing requirements will depend on how big your generated data files and reports are, how many reports enabled cache, and the number of concurrent users. If you need to process 1 GB of data and then to generate a report that is 1 GB, the temp disk should have more than 2 GB of disk space for a single report run. If you require ten concurrent report runs of similarly sized reports, then more than 20 GB of disk space is required. In addition, if you need to cache the data and reports for these ten users, you will need additional 20 GB of disk space. Note that cache is per user.

Setting the Report Scalable Threshold

This property specifies the threshold at which data is cached on the disk. When the data volume is large, caching the data will save memory, but will result in slower processing. Enter a value in bytes. The default and general recommendation for this property is 10000000 (10 megabytes).

Setting the Database Fetch Size

This property specifies the number of rows that are fetched from the database at a time when more rows are needed. This setting can be overridden at the data model level by setting the Database Fetch Size in the general properties of the data model (see *Entering Data Model Properties, Oracle Fusion Middleware Data Modeling Guide for Oracle Business Intelligence Publisher*). If neither value is set, the system default value of 300 is used.

Setting Server Caching Specifications

When BI Publisher processes a report, the data and the report document are stored in cache. Each item creates a separate cache file. Set the following properties to configure the size and expiration of this cache:

- **Cache Expiration** - enter the expiration period for the cache in minutes. The default is 30.
- **Cache Size Limit** - enter the maximum number of cached items to maintain regardless of the size of these items. The default is 1000.

When BI Publisher processes a report it stores the report definition in memory so that for subsequent requests for the same report the report definition can be retrieved from memory rather than from disk. Set the following property to configure this cache:

- **Maximum Cached Report Definitions** - enter the maximum number of report definitions to maintain in cache. The default is 50. This cache does not expire.

Note: Report-specific caching of data sets can be set as a report property. See *Configuring Report Properties, Oracle Fusion Middleware Report Designer's Guide for Oracle Business Intelligence Publisher*.

Setting Retry Properties for Database Failover

If BI Publisher fails to connect to a data source via the defined JDBC or JNDI connection, these properties control the number of retries that will be attempted before switching to the backup connection for the database.

- **Number of Retries**
Default value is 6. Enter the number of times to attempt to make a connection before switching to the backup database.
- **Retry Interval (seconds)**
Default value is 10 seconds. Enter the number of seconds to wait before retrying the connection.

Setting Up Data Sources

This chapter covers the following topics:

- Overview of Setting Up Data Sources
- Setting Up a JDBC Connection to Your Data Source
- Setting Up a Database Connection Using a JNDI Connection Pool
- Setting Up a Connection to an LDAP Server Data Source
- Setting Up a Connection to an OLAP Data Source
- Setting Up a Connection to a File Data Source
- Viewing or Updating a Data Source

Overview of Setting Up Data Sources

BI Publisher supports a variety of data sources. The data can come from a database, an HTTP XML feed, a Web service, an Oracle BI Analysis, an OLAP cube, an LDAP server, or a previously generated XML file or Microsoft Excel file.

This section describes how to set up connections to the following:

- A database via a direct JDBC connection, page 9-5
- A database via a JNDI connection pool, page 9-8
- An LDAP server, page 9-8
- A database configured for Online Analytical Processing (OLAP), page 9-9
- A File Directory, page 9-10

About Other Types of Data Sources

Connections to an HTTP XML feed or a Web service are configured when you define

the data model for your report (see *Creating Data Sets, Oracle Fusion Middleware Data Modeling Guide for Business Intelligence Publisher*). Connection to Oracle BI Presentation Services is automatically configured by the Oracle BI Installer.

About Data Sources and Security

When you set up data sources, you can also define security for the data source by selecting which user roles can access the data source.

Access must be granted for the following:


- a report consumer must have access to the data source to view reports that retrieve data from the data source
- a report designer must have access to the data source to build or edit a data model against the data source

By default, a role with administrator privileges can access all data sources.

The configuration page for the data source includes a **Security** region that lists all the available roles. You can grant roles access from this page, or you can also assign the data sources to roles from the roles and permissions page. See *Configuring Users and Roles*, page 3-3 for more information.

If this data source will be used in guest reports, you must also enable guest access here. For more information about guest access see *Enabling a Guest User*, page 4-2.

The following figure shows the Security region of the data source configuration page:

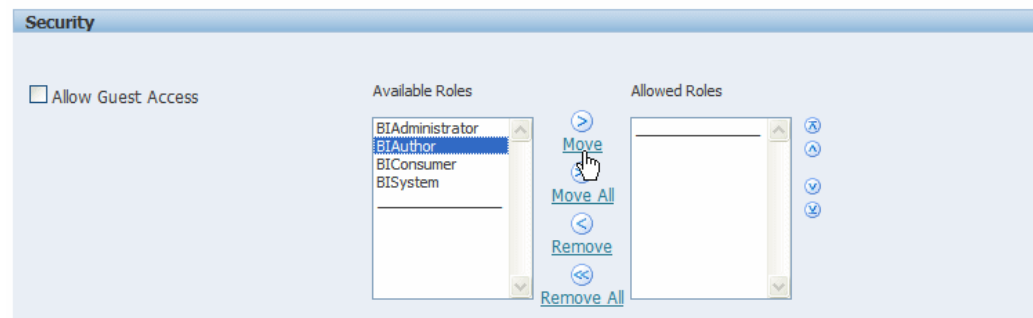

About Proxy Authentication

BI Publisher supports proxy authentication for connections to the following data sources:

- Oracle 10g database
- Oracle 11g database

- Oracle BI Server

For direct data source connections via JDBC and connections via a JNDI connection pool, BI Publisher enables you to select "Use Proxy Authentication". When you select Use Proxy Authentication, BI Publisher passes the user name of the individual user (as logged into BI Publisher) to the data source and thus preserves the client identity and privileges when the BI Publisher server connects to the data source.

Note: Enabling this feature may require additional setup on your database. For example, your database must have Virtual Private Database (VPD) enabled for row-level security.

For more information on Proxy Authentication in Oracle databases, refer to *Oracle Database Security Guide 10g* or the *Oracle Database Security Guide 11g*.

Note that for connections to the Oracle BI Server, Proxy Authentication is required. In this case, proxy authentication is handled by the Oracle BI Server, therefore the underlying database can be any database that is supported by the Oracle BI Server.

Choosing JDBC or JNDI Connection Type

In general, a JNDI connection pool is recommended because it provides the most efficient use of your resources. For example, if a report contains chained parameters, each time the report is executed, the parameters will initiate to open a database session every time.

About Backup Databases

When you configure a JDBC connection to a database, you can also configure a backup database. A backup database can be used in two ways:

- As a true backup when the connection to the primary database is unavailable
- As the reporting database for the primary. To improve performance you can configure your report data models to execute against the backup database only.

To use the backup database in either of these ways, you must also configure the report data model to use it.

See Setting Data Model Properties, *Oracle Fusion Middleware Data Modeling Guide for Oracle Business Intelligence Publisher* for information on configuring a report data model to use the backup data source.

About Pre Process Functions and Post Process Functions

You can define PL/SQL functions for BI Publisher to execute when a connection to a JDBC data source is created (preprocess function) or closed (postprocess function). The function must return a boolean value. This feature is supported for Oracle databases

only.

These two fields enable the administrator to set a user's context attributes before a connection is made to a database and then to dismiss the attributes after the connection is broken by the extraction engine.

The system variable `:xdo_user_name` can be used as a bind variable to pass the login username to the PL/SQL function calls. Setting the login user context in this way enables you to secure data at the data source level (rather than at the SQL query level).

For example, assume you have defined the following sample function:

Example

```
FUNCTION set_per_process_username (username_in IN VARCHAR2)
  RETURN BOOLEAN IS
  BEGIN
    SETUSERCONTEXT(username_in);
    return TRUE;
  END set_per_process_username
```

To call this function every time a connection is made to the database, enter the following in the **Pre Process Function** field:

```
set_per_process_username(:xdo_user_name)
```

Another sample usage may be to insert a row to the LOGTAB table every time a user connects or disconnects:

Example

```
CREATE OR REPLACE FUNCTION BIP_LOG (user_name_in IN VARCHAR2, smode IN
VARCHAR2)
RETURN BOOLEAN AS
  BEGIN
    INSERT INTO LOGTAB VALUES(user_name_in, sysdate,smode);
    RETURN true;
  END BIP_LOG;
```

In the **Pre Process Function** field enter: `BIP_LOG(:xdo_user_name)`

As a new connection is made to the database, it is logged in the LOGTAB table. The SMODE value specifies the activity as an entry or an exit. Calling this function as a **Post Process Function** as well will return results like the following:

NAME	UPDATE_DATE	S_FLAG
oracle	14-MAY-10 09.51.34.000000000	AMStart
oracle	14-MAY-10 10.23.57.000000000	AMFinish
administrator	14-MAY-10 09.51.38.000000000	AMStart
administrator	14-MAY-10 09.51.38.000000000	AMFinish
oracle	14-MAY-10 09.51.42.000000000	AMStart
oracle	14-MAY-10 09.51.42.000000000	AMFinish

Setting Up a JDBC Connection to Your Data Source

Prerequisites

- The JDBC driver for your selected database must be available to BI Publisher. If you are using an Oracle database or one of the DataDirect drivers provided by WebLogic Server, then the drivers will be installed in the correct location and there is no further setup required.

If you plan to use a different version of any of the drivers installed with WebLogic Server, you can replace the driver file in `WL_HOME\server\lib` with an updated version of the file or add the new file to the front of your CLASSPATH.

If you plan to use a third-party JDBC driver that is not installed with WebLogic Server, you need to update the WebLogic Server classpath to include the location of the JDBC driver classes. Edit the `commEnv.cmd/sh` script in `WL_HOME/common/bin` and prefix your classes as described in "Modifying the Classpath" in the *Command Reference for Oracle WebLogic Server*.

For more information, see *Oracle Fusion Middleware Configuring and Managing JDBC for Oracle WebLogic Server 11g*.

Setting Up a JDBC Connection to Your Data Source:

1. From the Administration page click **JDBC Connection**. This will display the list of existing JDBC connections.
2. Click **Add Data Source**.
3. Enter the following fields for the new connection:
 - **Data Source Name** - enter a display name for the data source. This name will appear in the Data Source selection list in the Data Model Editor.
 - **Driver Type** - select your database type from the list. When you select a driver type, BI Publisher will automatically display the appropriate Database Driver Class as well as provide the appropriate Connection String format for your selected database.
 - **Database Driver Class** - this will be automatically entered based on your selection for Driver Type. You can update this field if desired.

For example: `oracle.jdbc.OracleDriver` or
`hyperion.jdbc.sqlserver.SQLServerDriver`

- **Connection String** - enter the database connection string.

When you select the driver type, this field will automatically display the appropriate connection string format for your database type.

For an Oracle database the connect string will have the following format:

```
jdbc:oracle:thin:@[host]:[port]:[sid]
```

For example:

```
jdbc:oracle:thin:@myhost.us.example.com:1521:prod
```

For a Microsoft SQL Server, the connect string will have the following format:

```
jdbc:hyperion:sqlserver://[hostname]:[port];DatabaseName=[  
Databasename]
```

For example:

```
jdbc:hyperion:sqlserver://myhost.us.example.com:7777;Datab  
aseName=mydatabase
```

- **Use System User** - this is reserved for connections to the Oracle BI Server. See Setting Up a JDBC Connection to the Oracle BI Server, page C-3.
 - **User Name** - enter the user name required to access the data source on the database.
 - **Password** - enter the password associated with the user name for access to the data source on the database.
 - **Pre Process Function** and **Post Process Function** - (optional) enter a PL/SQL function to execute when a connection is created (Pre Process) or closed (Post Process). For more information see About Pre Process and Post Process Functions, page 9-3.
 - **Use Proxy Authentication** - select this box to enable Proxy Authentication. See About Proxy Authentication, page 9-2 for more information.
4. Click **Test Connection**. A confirmation will display.

The following figure shows the general settings of the JDBC connection page:

Administration > JDBC > Update Data Source: demo

Update Data Source: demo

Apply Cancel

General

✓ **TIP** Please make sure to install the required JDBC driver classes.
 ✓ **TIP** With Oracle Fusion Middleware Security Model, select the Use System User checkbox to use the BI System User for your BI Server Database Connection.

Data Source Name demo

* Driver Type Oracle 11g

* Database Driver Class oracle.jdbc.OracleDriver
(Example: oracle.jdbc.OracleDriver)

* Connection String jdbc:oracle:thin:@myhost:1521:orcl

Use System User

* Username oe

Password ●●●●●●

Pre Process Function

Post Process Function

Use Proxy Authentication

Test Connection

5. (Optional) Enable a backup database for this connection by entering the following:

- **Use Backup Data Source** - select this box.
- **Connection String** - enter the connection string for the backup database.
- **Username / Password** - enter the username and password for this database.
- Click **Test Connection**. A confirmation will display.

The following figure shows the Backup Data Source region of the page:

Backup Data Source

✓ **TIP** To enable access to a backup data source, please check the Use Backup Data Source checkbox and enter the necessary connection information.

Use Backup Data Source

Connection String jdbc:oracle:thin:@HOST:PORT:SID

Username username

Password ●●●●●●

Test Connection

6. Define security for this data source. Use the shuttle buttons to move roles from the **Available Roles** list to the **Allowed Roles** list. Only users assigned the roles on the Allowed Roles list will be able to create or view reports from this data source.

The settings defined here will be passed down to the backup data source, if one is defined.

Setting Up a Database Connection Using a JNDI Connection Pool

BI Publisher supports connecting to your JDBC data source via a connection pool. Using a connection pool increases efficiency by maintaining a cache of physical connections that can be reused. When a client closes a connection, the connection gets placed back into the pool so that another client can use it. A connection pool improves performance and scalability by allowing multiple clients to share a small number of physical connections. You set up the connection pool in your application server and access it via Java Naming and Directory Interface (JNDI).

After you set up the connection pool in your application server, enter the required fields in this page so that BI Publisher can utilize the pool to establish connections. For information on setting up a connection pool in WebLogic Server, see the chapter "Configuring JDBC Data Sources" in the *Oracle Fusion Middleware Configuring and Managing JDBC for Oracle WebLogic Server 11g*.

1. From the Administration page click **JNDI Connection**. This will display the list of existing JNDI connections.
2. Click **Add Data Source**.
3. Enter the following fields for the new connection:
 - **Data Source Name** - enter a display name for the data source. This name will appear in the Data Source selection list in the Data Model Editor.
 - **JNDI Name** - enter the JNDI location for the pool. For example, `jdbc/BIP10gSource`.
 - **Use Proxy Authentication** - select this box to enable Proxy Authentication. See About Proxy Authentication, page 9-2 for more information.
4. Click **Test Connection**. A confirmation message will display.
5. Define security for this data source. Use the shuttle buttons to move roles from the **Available Roles** list to the **Allowed Roles** list. Only users assigned the roles on the Allowed Roles list will be able to create or view reports from this the data source.

Setting Up a Connection to an LDAP Server Data Source

1. From the Administration page select **LDAP Connection**. This will display the list of existing LDAP connections.

2. Click **Add Data Source**.
3. Enter the following fields for the new connection:
 - Enter the **Data Source Name**. This is the display name that will appear in the Data Source selection list in the Data Model Editor.
 - Enter the **LDAP Connection URL** for your LDAP server in the format: ldap://hostname:port.
 - Enter the **Username** (for example: cn=admin,cn=users,dc=us,dc=company,dc=com).
 - **Password** - enter the password if required.
 - Enter the **JNDI Context Factor Class** (for example: com.sun.jndi.ldap.LdapCtxFactory).
4. Click **Test Connection**.
5. Define security for this data source. Use the shuttle buttons to move roles from the **Available Roles** list to the **Allowed Roles** list. Only users assigned the roles on the Allowed Roles list will be able to create data models from this the data source or view reports that run against this data source.

Setting Up a Connection to an OLAP Data Source

BI Publisher supports connecting to several types of OLAP databases. Note that to connect to Microsoft SQL Server 2000 Analysis Services, BI Publisher must be installed on a supported Windows operating system.

1. From the Administration page click **OLAP Connection**. This will display the list of existing OLAP connections.
2. Click **Add Data Source**.
3. Enter the following fields for the new connection:
 - **Data Source Name** - enter a display name for the data source. This name will appear in the Data Source selection list in the Data Model Editor.
OLAP Type - choose from the list of supported OLAP databases. When you choose the type, the OLAP Connection String field will update with the appropriate connection string format for your selection.
 - **OLAP Connection String** - enter the connection string for your OLAP database. Following are examples for each of the supported OLAP types:

- Oracle's Hyperion Essbase
Format: [server]
Example: myServer.us.example.com
- Microsoft SQL Server 2000 Analysis Services
Format: Data Source=[server];Provider=msolap;Initial Catalog=[catalog]
Example: Data Source=myServer;Provider=msolap;Initial Catalog=VideoStore
- Microsoft SQL Server 2005 Analysis Services
Format: Data Source=[server];Provider=msolap.3;Initial Catalog=[catalog]
Example: Data Source=myServer;Provider=msolap.3;Initial Catalog=VideoStore
- SAP BW
Format: ASHOST=[server] SYSNR=[system number] CLIENT=[client]
LANG=[language]
Example: ASHOST=172.16.57.44 SYSNR=01 CLIENT=800 LANG=EN

- **Username and Password** for the OLAP database.

4. Click **Test Connection**. A confirmation message will display.
5. Define security for this data source. Use the shuttle buttons to move roles from the **Available Roles** list to the **Allowed Roles** list. Only users assigned the roles on the Allowed Roles list will be able to create or view reports from this the data source.

Setting Up a Connection to a File Data Source

BI Publisher enables you to use existing XML or Microsoft Excel files created from other sources as input to your BI Publisher reports. To use a file as a data source, it must reside in a directory that BI Publisher can connect to. Set up the connection details to the file data source directory using this page.

1. From the Administration page click **File**. This will display the list of existing file sources.
2. Click **Add Data Source**.
3. Enter the following fields for the new data source:

- **Data Source Name** - enter a display name for the data source. This name will appear in the Data Source selection list in the Data Model Editor.
 - **Path** - enter the full path to the top-level directory on your server. Users will be able to access files in this directory and any subdirectories.
4. Define security for this data source. Use the shuttle buttons to move roles from the **Available Roles** list to the **Allowed Roles** list. Only users assigned the roles on the Allowed Roles list will be able to create or view reports from this data source.

Viewing or Updating a Data Source

1. From the Administration page select the Data Source type to update.
2. Select the name of the connection to view or update. All fields are updateable. See the appropriate section for setting up the data source type for information on the required fields.
3. Select **Apply** to apply any changes or **Cancel** to exit the update page.

Setting Up Integrations

Overview

This chapter describes how to set up integration with the following:

- Oracle BI Presentation Services , page 10-1

This integration enables you to use Oracle BI analyses as data sources for your reports. Once you have successfully set up the integration, Oracle BI Analysis will be enabled as a data set type selection in the Data Model Editor.

Configuring Integration with Oracle BI Presentation Services

The integration with Oracle BI Presentation Services enables the access to Oracle BI analyses as data sources for your reports.

When you install BI Publisher with Oracle BI Enterprise Edition this integration is automatically configured.

For prerequisites and steps for manually integrating BI Publisher with Oracle BI Enterprise Edition, see Integration Reference for Oracle Business Intelligence Enterprise Edition, page C-1.

Setting Up Delivery Destinations

Overview


Use the Delivery Options page to set up the delivery channels that you wish to use with your BI Publisher application. This chapter includes the following procedures:

- Defining Delivery Configuration Options, page 11-1
- Adding a Print or Fax Server, page 11-3
- Adding a WebDAV Server, page 11-5
- Adding an HTTP Server, page 11-5
- Adding an Email or FTP Server, page 11-6
- Adding a Common Unix Printing System (CUPS) Server, page 11-7

Configuring Delivery Options

Use the **Delivery Configuration Options** page to set general properties for e-mail deliveries from BI Publisher and for defining your SSL certificate file.

1. From the Admin page select **Delivery Configuration**.

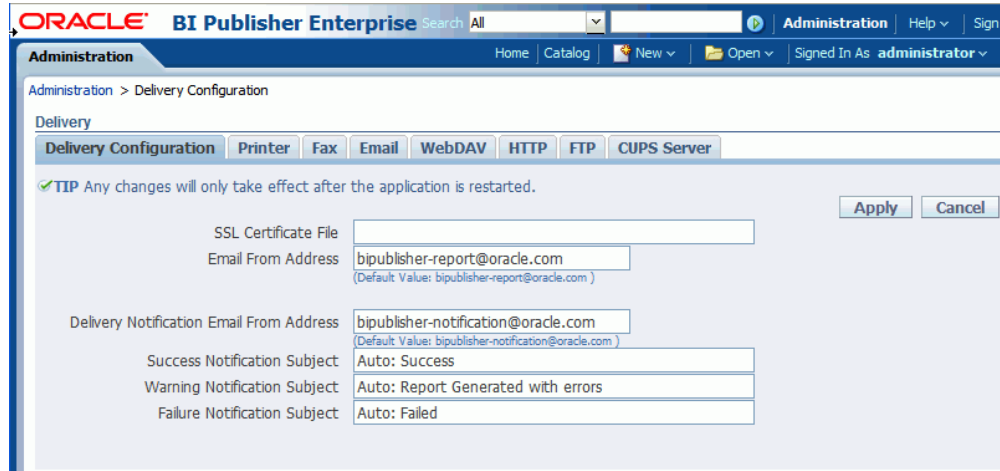

2. Enter the following properties:

- **SSL Certificate File** - if SSL is enabled for your installation, you can leave this field empty if you wish to use the default certificates built-in with BI Publisher. SSL will work with the default certificate if the server uses the certificate signed by a trusted certificate authority such as Verisign. This field is mandatory only if the user uses the SSL with a self-signed certificate. The self-signed certificate means the certificate is signed by a non-trusted certificate authority (usually the user).
- **Email From Address** - enter the From address that you want to appear on email report deliveries from the BI Publisher server. The default value is `bipublisher-report@oracle.com`.
- **Delivery Notification Email From Address** - enter the From address that you want to appear on notifications delivered from the BI Publisher server. The default value is `bipublisher-notification@oracle.com`.
- **Success Notification Subject** - enter the subject line to display for e-mail notification recipients when the report status is Success. Example: `Auto: Success`
- **Warning Notification Subject** - enter the subject line to display for e-mail notification recipients when the report status is Warning. Example: `Auto: Report Generated with errors`
- **Failure Notification Subject** - enter the subject line to display for e-mail notification recipients when the report status is Failed. Example: `Auto: Failed`

Adding a Printer or Fax Server

Printing is only supported through Internet Printing Protocol (IPP). If BI Publisher is operating in a Linux environment, you must set up the Common Unix Printing Service (CUPS). If BI Publisher is operating in a Windows environment, you must set up Windows Print Server for IPP. For information on setting up CUPS and Windows IPP, see Print Server Setup, page A-1.

About Printing PDF

PDF is a popular output format for business reports and is printable from viewer software such as Adobe Reader. However, some reports require printing directly from the report server. For example, paychecks and invoices are usually printed as scheduled batch jobs. Some newer printers with Postscript Level 3 compliant Raster Image Processing can natively support PDF documents, but there are still many printers in business use that only support Postscript Level 2 that cannot print PDF documents directly.

To print PDF documents directly from the BI Publisher server you have the following options:

- Select BI Publisher's PDF to Postscript filter. This can be enabled for Unix or Windows print servers.
- Configure a custom, or third-party filter.

After completing all other required fields for the print server, you will be able to schedule reports to print directly from the BI Publisher server to any printer in your system that supports PostScript Level 2.

To set up your printer or fax:

1. From the Admin page select **Printer** or **Fax**. Select **Add Server**.
2. Enter the following required fields:
 - **Server Name** - enter a unique name. Example: Localprinter

Important: You must enter a unique name for each server regardless of the type (printer, fax, e-mail, WebDAV, or FTP).

- **URI** - enter the Uniform Resource Identifier for the printer. Example: `ipp://myhost:631/printers/myprinter`
3. Enter a **Filter** (optional).

A filter enables you to call a conversion utility to convert PDF to Postscript or PDF to TIFF (for fax) for Windows-based print servers.

BI Publisher includes a PDF to Postscript filter. This filter converts PDF to Postscript Level 2. Choose **PDF to Postscript** from the list if you wish to use BI Publisher's predefined filter. See About Printing PDF, page 11-3 for more information.

About Custom Filters

To specify a custom filter, pass the native OS command string with the 2 placeholders for the input and output filename, {infile} and {outfile}.

This is useful especially if you are trying to call IPP printers directly or IPP printers on Microsoft Internet Information Service (IIS). Unlike CUPS, those print servers do not translate the print file to a format the printer can understand, therefore only limited document formats are supported. With the filter functionality, you can call any of the native OS commands to transform the document to the format that the target printer can understand.

For example, to transform a PDF document to a Postscript format, enter the following PDF to PS command in the **Filter** field:

```
pdftops {infile} {outfile}
```

To call an HP LaserJet printer setup on a Microsoft IIS from Linux, you can set Ghostscript as a filter to transform the PDF document into the format that the HP LaserJet can understand. To do this, enter the following Ghostscript command in the **Filter** field:

```
gs -q -dNOPAUSE -dBATCH -sDEVICE=laserjet -sOutputFile={outfile}  
{infile}
```

For fax servers, you can use the filter to transform the file to Tag Image File Format (TIFF).

4. Optionally enter the following fields if appropriate:
 - Security fields: Username and Password, Authentication Type (None, Basic, Digest) and Encryption Type (None, SSL).
 - Proxy Server fields: Host, Port, User Name, Password, Authentication Type (None, Basic, Digest)

Adding an E-mail Server

1. From the Admin page select Email. This will show the list of servers already added. Select **Add Server**.
2. Enter the **Server Name**, **Host**, and **Port** for the e-mail server.

Important: You must enter a unique name for each server regardless of the type (printer, fax, e-mail, WebDAV, or FTP).

3. Select a **Secure Connection** method to use for connections with the e-mail server. The options are:
 - None
 - SSL - use Secure Sockets Layer
 - TLS - (Transport Layer Security) use TLS when the server supports the protocol; SSL will be accepted in the response.
 - TLS Required - if the server does not support TLS, the connection will not be made.
4. Optionally enter the following fields if appropriate:
 - General fields: Port
 - Security fields: Username and Password.

Adding a WebDAV Server

1. From the Admin page select **WebDAV**. This will show the list of servers already added. Select **Add Server**.
2. Enter the **Name** and **Host** for the new server.

Important: You must enter a unique name for each server regardless of the type (printer, fax, email, WebDAV, or FTP).
3. Optionally enter the following fields if appropriate:
 - General fields: Port
 - Security fields: Authentication Type (None, Basic, Digest) and Encryption Type (None, SSL).
 - Proxy Server fields: Host, Port, User Name, Password, Authentication Type (None, Basic, Digest)

Adding an HTTP Server

You can register an application URL or postprocess HTTP URL as an HTTP server to send a notification request to after your report has completed. The HTTP notification sent by BI Publisher will post a form data for Job ID, report URL and Job Status to the HTTP Server URL page.

For more information about setting up an HTTP notification to integrate with a third-party application, see *Setting Up an After Report Trigger*, *Oracle Fusion Middleware Developer's Guide for Oracle Business Intelligence Publisher*. For information on enabling an HTTP notification for a scheduled report, see *Configuring Notifications*, *Oracle Fusion Middleware User's Guide for Oracle Business Intelligence Publisher*.

1. From the Admin page select HTTP. This will show the list of servers already added. Select **Add Server**.
2. Enter a name for your server, and enter the URL. When your report finishes processing, BI Publisher will post form data for Job ID, report URL and Job Status.
3. Enter the Security information, if required. If your server is password protected, enter the Username and Password. Select the Authentication Type: None, Basic, or Digest; and Encryption Type: None or SSL.
4. If the notification is to be sent through a proxy server, enter the fully qualified Host name, the Port, the Username and Password, and Authentication type of the proxy server.

Adding an FTP Server

Important: If the destination file name supplied to the BI Publisher scheduler contains non-ascii characters, BI Publisher will use UTF-8 encoding to specify the file name to the destination FTP server. Your FTP server must support UTF-8 encoding or the job delivery will fail with "Delivery Failed" error message.

1. From the Admin page select FTP. This will show the list of servers already added. Click **Add Server**.
2. Enter the following fields for the FTP server:
 - **Server Name** - example: myftpserver
 - **Host** - example: myhost.company.com
 - **Port**: example: 21

Important: You must enter a unique name for each server regardless of the type (printer, fax, email, WebDAV, or FTP).

3. Select the **Use Secure FTP** box to enable Secure FTP (SFTP)

4. Enter a **Username** and **Password** for the server if required.

Adding a Common Unix Printing System (CUPS) Server

1. From the Admin page select CUPS. This will show the list of servers already added. Select **Add Server**.
2. Enter the **Server Name** and **Host** and **Port** for the CUPS server.
For more information see Setting Up Cups, page A-1.

Defining Runtime Configurations

This chapter covers the following topics:

- Setting Runtime Properties
- PDF Output Properties
- PDF Security Properties
- PDF Digital Signature Properties
- RTF Output Properties
- HTML Output Properties
- FO Processing Properties
- RTF Template Properties
- PDF Template Properties
- Flash Template Properties
- CSV Output Properties
- Excel 2007 Output Properties
- All Outputs
- Defining Font Mappings
- Defining Currency Formats

Setting Runtime Properties

The Runtime Configuration page enables you to set runtime properties at the server level. These same properties can also be set at the report level, from the report editor's Properties dialog (see Defining Report Properties, *Oracle Fusion Middleware Report Designer's Guide for Oracle Business Intelligence Publisher*). If different values are set for a property at each level, the report level will take precedence.

PDF Output Properties

The following table describes the properties that are available for PDF output:

Property Name	Description
Compress PDF output	<p>Default: true</p> <p>Description: Specify "true" or "false" to control compression of the output PDF file.</p> <p>Internal Name:pdf-compression</p>
Hide PDF viewer's menu bars	<p>Default: false</p> <p>Description: Specify "true" to hide the viewer application's menu bar when the document is active. The menu bar option is only effective when using the Export button, which displays the output in a standalone Acrobat Reader application outside of the browser.</p> <p>Internal Name: pdf-hide-menubar</p>
Hide PDF viewer's tool bars	<p>Default: false</p> <p>Description: Specify "true" to hide the viewer application's toolbar when the document is active.</p> <p>Internal Name:pdf-hide-toolbar</p>
Replace smart quotes	<p>Default: true</p> <p>Description: Set to "false" if you do not want curly quotes replaced with straight quotes in your PDF output.</p> <p>Internal Name: pdf-replace-smartquotes</p>

Property Name	Description
Use only one shared resources object for all pages	<p>Default: true</p> <p>Description: The default mode of BI Publisher creates one shared resources object for all pages in a PDF file. This mode has the advantage of creating an overall smaller file size. However, the disadvantages are the following:</p> <ul style="list-style-type: none"> • Viewing may take longer for a large file with many SVG objects • If you choose to break the file up by using Adobe Acrobat to extract or delete portions, the edited PDF files will be larger because all of the single shared resource object (containing all of the SVG objects for the entire file) will be included with each extracted portion. <p>Setting this property to "false" will create a resource object for each page. The file size will be bigger, but the PDF viewing will be faster and the PDF can be broken up into smaller files more easily.</p> <p>Internal Name: pdf-use-one-resources</p>

PDF Security Properties

Use the following properties to control the security settings for your output PDF documents:

Property Name	Description
Enable PDF Security	<p>Default: false</p> <p>Description: If you specify "true," the output PDF file will be encrypted. You can then also specify the following properties:</p> <ul style="list-style-type: none"> • Open document password • Modify permissions password • Encryption Level <p>Internal Name: pdf-security</p>

Property Name	Description
Open document password	<p>Default: N/A</p> <p>Description: This password will be required for opening the document. It will enable users to open the document only. This property is enabled only when "Enable PDF Security" is set to "true".</p> <p>Note that BI Publisher follows Adobe's password restrictions. The password must contain only Latin 1 characters and must be no more than 32 bytes long.</p> <p>Internal Name:pdf-open-password</p>
Modify permissions password	<p>Default: N/A</p> <p>Description: This password enables users to override the security setting. This property is effective only when "Enable PDF Security" is set to "true".</p> <p>Note that BI Publisher follows the Adobe's password restrictions. The password must contain only Latin 1 characters and must be no more than 32 bytes long.</p> <p>Internal Name:pdf-permissions-password</p>

Property Name	Description
Encryption level	<p>Default: 2 - high</p> <p>Description: Specify the encryption level for the output PDF file. The possible values are:</p> <ul style="list-style-type: none"> • 0: Low (40-bit RC4, Acrobat 3.0 or later) • 1: Medium (128-bit RC4, Acrobat 5.0 or later) • 2: High (128-bit AES, Acrobat 7.0 or later) <p>This property is effective only when "Enable PDF Security" is set to "true". When Encryption level is set to 0, you can also set the following properties:</p> <ul style="list-style-type: none"> • Disable printing • Disable document modification • Disable context copying, extraction, and accessibility • Disable adding or changing comments and form fields <p>When Encryption level is set to 1 or higher, the following properties are available:</p> <ul style="list-style-type: none"> • Enable text access for screen readers • Enable copying of text, images, and other content • Allowed change level • Allowed printing level <p>Internal Name: pdf-encryption-level</p>
Disable document modification	<p>Default: false</p> <p>Description: Permission available when "Encryption level" is set to 0. When set to "true", the PDF file cannot be edited.</p> <p>Internal Name: pdf-no-changing-the-document</p>

Property Name	Description
Disable printing	<p>Default: false</p> <p>Description: Permission available when "Encryption level" is set to 0. When set to "true", printing is disabled for the PDF file.</p> <p>Internal Name:pdf-no-printing</p>
Disable adding or changing comments and form fields	<p>Default: false</p> <p>Description: Permission available when "Encryption level" is set to 0. When set to "true", the ability to add or change comments and form fields is disabled.</p> <p>Internal Name:pdf-no-accff</p>
Disable context copying, extraction, and accessibility	<p>Default: false</p> <p>Description: Permission available when "Encryption level" is set to 0. When set to "true", the context copying, extraction, and accessibility features are disabled.</p> <p>Internal Name: pdf-no-cceda</p>
Enable text access for screen readers	<p>Default: true</p> <p>Description: Permission available when "Encryption level" is set to 1 or higher. When set to "true", text access for screen reader devices is enabled.</p> <p>Internal Name: pdf-enable-accessibility</p>
Enable copying of text, images, and other content	<p>Default: false</p> <p>Description: Permission available when "Encryption level" is set to 1 or higher. When set to "true", copying of text, images, and other content is enabled.</p> <p>Internal Name: pdf-enable-copying</p>

Property Name	Description
Allowed change level	<p>Default: 0</p> <p>Description: Permission available when "Encryption level" is set to 1 or higher. Valid Values are:</p> <ul style="list-style-type: none"> • 0: none • 1: Allows inserting, deleting, and rotating pages • 2: Allows filling in form fields and signing • 3: Allows commenting, filling in form fields, and signing • 4: Allows all changes except extracting pages <p>Internal Name:pdf-changes-allowed</p>
Allowed printing level	<p>Default: 0</p> <p>Description: Permission available when "Encryption level" is set to 1 or higher. Valid values are:</p> <ul style="list-style-type: none"> • 0: None • 1: Low resolution (150 dpi) • 2: High resolution <p>Internal Name:pdf-printing-allowed</p>

PDF Digital Signature Properties

The following properties should only be set at the report level to enable digital signature for a report and to define the placement of the signature in the output PDF document. For more information on how to enable digital signature for your output PDF documents, see *Implementing a Digital Signature*, page 6-1.

Note that to implement digital signature for a report based on a PDF layout template or an RTF layout template, you must set the property **Enable Digital Signature** to "True" for the report.

You also must set the appropriate properties to place the digital signature in the desired location on your output report. Your choices for placement of the digital signature depend on the template type. The choices are as follows:

- (PDF only) Place the digital signature in a specific field by setting the **Existing signature field name** property.
- (RTF and PDF) Place the digital signature in a general location of the page (top left, top center, or top right) by setting the **Signature field location** property.
- (RTF and PDF) Place the digital signature in a specific location designated by x and y coordinates by setting the **Signature field x coordinate** and **Signature field y coordinate** properties.

If you choose this option, you can also set **Signature field width** and **Signature field height** to define the size of the field in your document.

Note that if you enable digital signature, but do not set any location properties, the digital signature placement will default to the top left of the document.

Property Name	Description
Enable Digital Signature	<p>Default: false</p> <p>Description: Set this to "true" to enable digital signature for the report.</p> <p>Internal Name: signature-enable</p>
Existing signature field name	<p>Default: N/A</p> <p>Description: This property applies to PDF layout templates only. If your report is based on a PDF template, you can enter a field from the PDF template in which to place the digital signature. For more information on defining a field for the signature in a PDF template, see <i>Adding or Designating a Field for a Digital Signature, Oracle Fusion Middleware Report Designer's Guide for Oracle Business Intelligence Publisher</i>.</p> <p>Internal Name: signature-field-name</p>
Signature field location	<p>Default: top-left</p> <p>Description: This property can apply to RTF or PDF layout templates. This property provides a list containing the following values: Top Left, Top Center, Top Right. Choose one of these general locations and BI Publisher will insert the digital signature to the output document, sized and positioned appropriately. If you choose to set this property, do not enter X and Y coordinates or width and height properties.</p> <p>Internal Name: signature-field-location</p>

Property Name	Description
Signature field X coordinate	<p>Default: 0</p> <p>Description: This property can apply to RTF or PDF layout templates. Using the left edge of the document as the zero point of the X axis, enter the position in points that you want the digital signature to be placed from the left. For example, if you want the digital signature to be placed horizontally in the middle of an 8.5 inch by 11 inch document (that is, 612 points in width and 792 points in height), enter 306.</p> <p>Internal Name: <code>signature-field-pos-x</code></p>
Signature field Y coordinate	<p>Default: 0</p> <p>Description: This property can apply to RTF or PDF layout templates. Using the bottom edge of the document as the zero point of the Y axis, enter the position in points that you want the digital signature to be placed from the bottom. For example, if you want the digital signature to be placed vertically in the middle of an 8.5 inch by 11 inch document (that is, 612 points in width and 792 points in height), enter 396.</p> <p>Internal Name: <code>signature-field-pos-y</code></p>
Signature field width	<p>Default: 0</p> <p>Description: Enter in points (72 points equal one inch) the desired width of the inserted digital signature field. This applies only if you are also setting the properties Signature field x coordinate and Signature field Y coordinate.</p> <p>Internal Name: <code>signature-field-width</code></p>
Signature field height	<p>Default: 0</p> <p>Description: Enter in points (72 points equal one inch) the desired height of the inserted digital signature field. This applies only if you are also setting the properties Signature field x coordinate and Signature field Y coordinate.</p> <p>Internal Name: <code>signature-field-height</code></p>

RTF Output Properties

The following properties can be set to govern RTF output files:

Property Name	Description
Enable change tracking	<p>Default: false</p> <p>Description: Set to "true" to enable change tracking in the output RTF document.</p> <p>Internal Name: rtf-track-changes</p>
Protect document for tracked changes	<p>Default: false</p> <p>Description: Set to "true" to protect the document for tracked changes.</p> <p>Internal Name: rtf-protect-document-for-tracked-changes</p>
Default font	<p>Default: Arial:12</p> <p>Description: Use this property to define the font style and size in RTF output when no other font has been defined. This is particularly useful to control the sizing of empty table cells in generated reports.</p> <p>Enter the font name and size in the following format <FontName>:<size> for example: Arial:12.</p> <p>Note that the font you choose must be available to the BI Publisher processing engine at runtime. See Defining Font Mappings, page 12-19 for information on installing fonts for the BI Publisher server and also for the list of fonts predefined for BI Publisher.</p> <p>Internal Name: rtf-output-default-font</p>

HTML Output Properties

The following properties can be set to govern HTML output files:

Property Name	Description
Show header	<p>Default: true</p> <p>Description: Set to "false" to suppress the template header in HTML output.</p> <p>Internal Name: html-show-header</p>

Property Name	Description
Show footer	<p>Default: true</p> <p>Description: Set to "false" to suppress the template footer in HTML output.</p> <p>Internal Name: <code>html-show-footer</code></p>
Replace smart quotes	<p>Default: true</p> <p>Description: Set to "false" if you do not want curly quotes replaced with straight quotes in your HTML output.</p> <p>Internal Name: <code>html-replace-smartquotes</code></p>
Character set	<p>Default: UTF-8</p> <p>Description: Specifies the output HTML character set.</p> <p>Internal Name: <code>html-output-charset</code></p>
Make HTML output accessible	<p>Default: false</p> <p>Description: Specify true if you want to make the HTML output accessible.</p> <p>Internal Name: <code>make-accessible</code></p>
Use percentage width for table columns	<p>Default: true</p> <p>Description: Set this property to true to render table columns according to a percentage value of the total width of the table rather than as a value in points.</p> <p>This property is especially useful if your browser renders tables with extremely wide columns. Setting this property to true will improve readability of the tables.</p> <p>Internal Name: <code>html-output-width-in-percentage</code></p>

FO Processing Properties

The following properties can be set to govern FO processing:

Property Name	Description
Use BI Publisher's XSLT processor	<p>Default: true</p> <p>Description: Controls BI Publisher's parser usage. If set to false, XSLT will not be parsed.</p> <p>Internal Name: <code>xslt-xdoparser</code></p>
Enable scalable feature of XSLT processor	<p>Default: false</p> <p>Description: Controls the scalable feature of the XDO parser. The property "Use BI Publisher's XSLT processor" must be set to "true" for this property to be effective.</p> <p>Internal Name: <code>xslt-scalable</code></p>
Enable XSLT runtime optimization	<p>Default: true</p> <p>Description: When set to "true", the overall performance of the FO processor is increased and the size of the temporary FO files generated in the temp directory is significantly decreased. Note that for small reports (for example 1-2 pages) the increase in performance is not as marked.</p> <p>To further enhance performance when you set this property to true, it is recommended that you set the property Extract attribute sets to "false". See RTF Template Properties, page 12-14.</p> <p>Internal Name: <code>xslt-runtime-optimization</code></p>
Enable XPath Optimization	<p>Default: false</p> <p>Description: When set to "true", the XML data file will be analyzed for element frequency. The information is then used to optimize XPath in XSL.</p> <p>Internal Name: <code>xslt-xpath-optimization</code></p>
Pages cached during processing	<p>Default: 50</p> <p>Description: This property is enabled only when you have specified a Temporary Directory (under General properties). During table of contents generation, the FO Processor caches the pages until the number of pages exceeds the value specified for this property. It then writes the pages to a file in the Temporary Directory.</p> <p>Internal Name: <code>system-cache-page-size</code></p>

Property Name	Description
Bidi language digit substitution type	<p>Default: None</p> <p>Description: Valid values are "None" and "National". When set to "None", Eastern European numbers will be used. When set to "National", Hindi format (Arabic-Indic digits) will be used. This setting is effective only when the locale is Arabic, otherwise it is ignored.</p> <p>Internal Name: <code>digit-substitution</code></p>
Disable variable header support	<p>Default: false</p> <p>Description: If "true", prevents variable header support. Variable header support automatically extends the size of the header to accommodate the contents.</p> <p>Internal Name: <code>fo-prevent-variable-header</code></p>
Add prefix to IDs when merging FO	<p>Default: false</p> <p>Description: When merging multiple XSL-FO inputs, the FO Processor automatically adds random prefixes to resolve conflicting IDs. Setting this property to "true" disables this feature.</p> <p>Internal Name: <code>fo-merge-conflict-resolution</code></p>
Enable multithreading	<p>Default: false</p> <p>Description: If you have a multiprocessor machine or a machine with a dual-core single processor, you may be able to achieve faster document generation by setting this option to True.</p> <p>Internal Name: <code>fo-multi-threads</code></p>
Disable external references	<p>Default: true</p> <p>Description: A "true" setting (default) disallows the importing of secondary files such as subtemplates or other XML documents during XSL processing and XML parsing. This increases the security of your system. Set this to "false" if your report or template calls external files.</p> <p>Internal Name: <code>xdk-secure-io-mode</code></p>

Property Name	Description
FO Parsing Buffer Size	<p>Default: 1000000</p> <p>Description: Sets the size of the buffer for the FO Processor. When the buffer is full, the elements from the buffer will be rendered in the report. Reports with large tables or pivot tables that require complex formatting and calculations may require a larger buffer to properly render those objects in the report. Increase the size of the buffer at the report level for these reports. Note that increasing this value will affect the memory consumption of your system.</p> <p>Internal Name: fo-chunk-size</p>
Enable XSLT runtime optimization for sub-template	<p>Default: true</p> <p>Note: The default is true on the BI Publisher server. If you call the FOProcessor directly, the default is false.</p> <p>Description: Provides an option to perform XSL import in FOProcessor before passing only one XSL to XDK for further processing. This allows xslt-optimization to be applied to the entire main XSL template which already includes all its subtemplates.</p> <p>Internal Name: xslt-do-import</p>
Enable PPTX native chart support	<p>Default: true</p> <p>Description: This property applies to PowerPoint 2007 output. When set to true, charts in PowerPoint 2007 output will be rendered as native PowerPoint (PPTX) charts. If this property is set to false, the chart will be rendered as an embedded PNG image.</p> <p>Internal Name: pptx-native-chart</p>

RTF Template Properties

The following properties can be set to govern RTF templates:

Property Name	Description
Extract attribute sets	<p>Default: Auto</p> <p>Description: The RTF processor will automatically extract attribute sets within the generated XSL-FO. The extracted sets are placed in an extra FO block, which can be referenced. This improves processing performance and reduces file size.</p> <p>Valid values are:</p> <ul style="list-style-type: none"> • Enable - extract attribute sets for all templates and subtemplates • Auto - extract attribute sets for templates, but not subtemplates • Disable - do not extract attribute sets <p>Internal Name: rtf-extract-attribute-sets</p>
Enable XPath rewriting	<p>Default: true</p> <p>Description: When converting an RTF template to XSL-FO, the RTF processor will automatically rewrite the XML tag names to represent the full XPath notations. Set this property to "false" to disable this feature.</p> <p>Internal Name: rtf-rewrite-path</p>
Characters used for checkbox	<p>Default: Albany WT J;9746;9747/A</p> <p>Description: The BI Publisher default PDF output font does not include a glyph to represent a checkbox. If your template contains a checkbox, use this property to define a Unicode font for the representation of checkboxes in your PDF output. You must define the Unicode font number for the "checked" state and the Unicode font number for the "unchecked" state using the following syntax: <code>fontname;<unicode font number for true value's glyph >;<unicode font number for false value's glyph></code></p> <p>Example: Albany WT J;9746;9747/A</p> <p>Note that the font that you specify must be made available to BI Publisher at runtime.</p> <p>Internal Name: rtf-checkbox-glyph</p>

PDF Template Properties

The following properties can be set to govern PDF templates:

Property Name	Description
Remove PDF fields from output	<p>Default: false</p> <p>Description: Specify "true" to remove PDF fields from the output. When PDF fields are removed, data entered in the fields cannot be extracted. For more information, see Setting Fields as Updateable or Read Only, <i>Oracle Fusion Middleware Report Designer's Guide for Oracle Business Intelligence Publisher</i>.</p> <p>Internal Name: remove-pdf-fields</p>
Set all fields as read only in output	<p>Default: true</p> <p>Description: By default, BI Publisher sets all fields in the output PDF of a PDF template to be read only. If you want to set all fields to be updateable, set this property to "false". For more information, see Setting Fields as Updateable or Read Only, <i>Oracle Fusion Middleware Report Designer's Guide for Oracle Business Intelligence Publisher</i>.</p> <p>Internal Name: all-field-readonly</p>
Maintain each field's read only setting	<p>Default: false</p> <p>Description: Set this property to "true" if you want to maintain the "Read Only" setting of each field as defined in the PDF template. This property overrides the settings of "Set all fields as read only in output." For more information, see Setting Fields as Updateable or Read Only, <i>Oracle Fusion Middleware Report Designer's Guide for Oracle Business Intelligence Publisher</i>.</p> <p>Internal Name: all-fields-readonly-asis</p>

Flash Template Properties

The following properties can be set to govern Flash templates:

Property Name	Description
Page width of wrapper document	<p>Default: 792</p> <p>Description: Specify in points the width of the output PDF document. The default is 792, or 11 inches.</p> <p>Internal Name: flash-page-width</p>

Property Name	Description
Page height of wrapper document	<p>Default: 612</p> <p>Description: Specify in points the height of the output PDF document. The default is 612, or 8.5 inches</p> <p>Internal Name: <code>flash-page-height</code></p>
Start x position of Flash area in PDF	<p>Default: 18</p> <p>Description: Using the left edge of the document as the 0 axis point, specify in points the beginning horizontal position of the Flash object in the PDF document. The default is 18, or .25 inch</p> <p>Internal Name: <code>flash-startx</code></p>
Start y position of Flash area in PDF	<p>Default: 18</p> <p>Description: Using the upper left corner of the document as the 0 axis point, specify in points the beginning vertical position of the Flash object in the PDF document. The default is 18, or .25 inch.</p> <p>Internal Name: <code>flash-starty</code></p>
Width of Flash area	<p>Default: Same as flash width in points in swf</p> <p>Description: Enter in points the width of the area in the document for the Flash object to occupy. The default is the width of the SWF object.</p> <p>Internal Name: <code>flash-width</code></p>
Height of Flash area	<p>Default: Same as flash height in points in swf</p> <p>Description: Enter in points the height of the area in the document for the Flash object to occupy. The default is the height of the SWF object.</p> <p>Internal Name: <code>flash-height</code></p>

CSV Output Properties

Use the following properties to control comma-separated value output:

Property Name	Description
CSV delimiter	<p>Default: ,</p> <p>Description: Specifies the character used to delimit the data in comma-separated value output. Other options are: Semicolon (;), Tab (\t) and Pipe ().</p>
Remove leading and trailing white space	<p>Default: false</p> <p>Description: Specify "True" to remove leading and trailing white space between data elements and the delimiter.</p>

Excel 2007 Output Properties

Use the following properties to control Excel 2007 output:

Property Name	Description
Show grid lines	<p>Default: false</p> <p>Description: Set to true to show the Excel table grid lines in the report output.</p>
Page break as a new sheet	<p>Default: true</p> <p>Description: When set to "True" a page break specified in the report template will generate a new sheet in the Excel workbook.</p>
Minimum column width	<p>Default: 3 (in points, 0.04 inch)</p> <p>Description: When the column width is less than the specified minimum and it contains no data, the column will be merged with the preceding column.</p>
Minimum row height	<p>Default: 1 (in points, 0.01 inch)</p> <p>Description: When the row height is less than the specified minimum and it contains no data, the row will be removed.</p>

All Outputs

Property Name	Description
Hide version number in output	<p>Default: true</p> <p>Description: Some report output documents display Oracle BI Publisher in the document properties. For example, PDF documents identify Oracle BI Publisher as the PDF Producer in the properties for the document. If you wish to include the version of BI Publisher (for example, Oracle BI Publisher 11.1.1.5.0) that generated the document, set this property to false.</p>

Defining Font Mappings

BI Publisher's Font Mapping feature enables you to map base fonts in RTF or PDF templates to target fonts to be used in the published document. Font Mappings can be specified at the site or report level. Font mapping is performed only for PDF output and PowerPoint output.

There are two types of font mappings:

- RTF Templates - for mapping fonts from RTF templates and XSL-FO templates to PDF and PowerPoint output fonts
- PDF Templates - for mapping fonts from PDF templates to different PDF output fonts.

Making Fonts Available to BI Publisher

BI Publisher provides a set of Type1 fonts and a set of TrueType fonts. You can select any of the fonts in these sets as a target font with no additional setup required. For a list of the predefined fonts see BI Publisher's Predefined Fonts, page 12-20.

The predefined fonts are located in `$JAVA_HOME/jre/lib/fonts`. If you wish to map to another font, you must place the font in this directory to make it available to BI Publisher at runtime. If your environment is clustered, you must place the font on every server.

Setting Font Mapping at the Site Level or Report Level

A font mapping can be defined at the site level or the report level:

- To set a mapping at the site level, select the Font Mappings link from the Administration page.
- To set a mapping at the report level, view the Properties for the report, then select

the Font Mappings tab. These settings will apply to the selected report only.

The report-level settings will take precedence over the site-level settings.

Creating a Font Mapping

From the **Administration** page, under **Runtime Configuration**, select **Font Mappings**.

To create a Font Mapping

- Under RTF Templates or PDF Templates, select **Add Font Mapping**.
- Enter the following on the **Add Font Mapping** page:
 - Base Font - enter the font family that will be mapped to a new font. Example: Arial
 - Select the **Style**: Normal or Italic (Not applicable to PDF Template font mappings)
 - Select the **Weight**: Normal or Bold (Not applicable to PDF Template font mappings)
 - Select the **Target Font Type**: Type 1 or TrueType
 - Enter the **Target Font**

If you selected TrueType, you can enter a specific numbered font in the collection. Enter the **TrueType Collection (TTC) Number** of the desired font.

For a list of the predefined fonts see BI Publisher's Predefined Fonts, page 12-20

BI Publisher's Predefined Fonts

The following Type1 fonts are built-in to Adobe Acrobat and BI Publisher provides a mapping for these fonts by default. You can select any of these fonts as a target font with no additional setup required.

The Type1 fonts are listed in the following table:

Type 1 Fonts

Number	Font Family	Style	Weight	Font Name
1	serif	normal	normal	Time-Roman

Number	Font Family	Style	Weight	Font Name
1	serif	normal	bold	Times-Bold
1	serif	italic	normal	Times-Italic
1	serif	italic	bold	Times-BoldItalic
2	sans-serif	normal	normal	Helvetica
2	sans-serif	normal	bold	Helvetica-Bold
2	sans-serif	italic	normal	Helvetica-Oblique
2	sans-serif	italic	bold	Helvetica-BoldOblique
3	monospace	normal	normal	Courier
3	monospace	normal	bold	Courier-Bold
3	monospace	italic	normal	Courier-Oblique
3	monospace	italic	bold	Courier-BoldOblique
4	Courier	normal	normal	Courier
4	Courier	normal	bold	Courier-Bold
4	Courier	italic	normal	Courier-Oblique
4	Courier	italic	bold	Courier-BoldOblique
5	Helvetica	normal	normal	Helvetica
5	Helvetica	normal	bold	Helvetica-Bold
5	Helvetica	italic	normal	Helvetica-Oblique
5	Helvetica	italic	bold	Helvetica-BoldOblique

Number	Font Family	Style	Weight	Font Name
6	Times	normal	normal	Times
6	Times	normal	bold	Times-Bold
6	Times	italic	normal	Times-Italic
6	Times	italic	bold	Times-BoldItalic
7	Symbol	normal	normal	Symbol
8	ZapfDingbats	normal	normal	ZapfDingbats

The TrueType fonts are listed in the following table. All TrueType fonts will be subset and embedded into PDF.

Number	Font Family Name	Style	Weight	Actual Font	Actual Font Type
1	Albany WT	normal	normal	ALBANYWT.ttf	TrueType (Latin1 only)
2	Albany WT J	normal	normal	ALBANWTJ.ttf	TrueType (Japanese flavor)
3	Albany WT K	normal	normal	ALBANWTK.ttf	TrueType (Korean flavor)
4	Albany WT SC	normal	normal	ALBANWTS.ttf	TrueType (Simplified Chinese flavor)
5	Albany WT TC	normal	normal	ALBANWTT.ttf	TrueType (Traditional Chinese flavor)
6	Andale Duospace WT	normal	normal	ADUO.ttf	TrueType (Latin1 only, Fixed width)

Number	Font Family Name	Style	Weight	Actual Font	Actual Font Type
6	Andale Duospace WT	bold	bold	ADUOB.ttf	TrueType (Latin1 only, Fixed width)
7	Andale Duospace WT J	normal	normal	ADUOJ.ttf	TrueType (Japanese flavor, Fixed width)
7	Andale Duospace WT J	bold	bold	ADUOJB.ttf	TrueType (Japanese flavor, Fixed width)
8	Andale Duospace WT K	normal	normal	ADUOK.ttf	TrueType (Korean flavor, Fixed width)
8	Andale Duospace WT K	bold	bold	ADUOKB.ttf	TrueType (Korean flavor, Fixed width)
9	Andale Duospace WT SC	normal	normal	ADUOSC.ttf	TrueType (Simplified Chinese flavor, Fixed width)
9	Andale Duospace WT SC	bold	bold	ADUOSCB.ttf	TrueType (Simplified Chinese flavor, Fixed width)
10	Andale Duospace WT TC	normal	normal	ADUOTC.ttf	TrueType (Traditional Chinese flavor, Fixed width)
10	Andale Duospace WT TC	bold	bold	ADUOTCB.ttf	TrueType (Traditional Chinese flavor, Fixed width)

Defining Currency Formats

Currency formats defined in the Administration Runtime Configuration page will be applied at the system level. Currency formats can also be applied at the report level. The report-level settings will take precedence over the system-level settings here. For information on setting a report-level currency format, see *About Currency Formats, Oracle Fusion Middleware Report Designer's Guide for Oracle Business Intelligence Publisher*.

Understanding Currency Formats

The Currency Formats tab enables you to map a number format mask to a specific currency so that your reports can display multiple currencies with their own corresponding formatting. Currency formatting is only supported for RTF and XSL-FO templates.

To apply these currency formats in your RTF template, you must use the `format-currency` function. See *Currency Formatting, Oracle Fusion Middleware Report Designer's Guide for Oracle Business Intelligence Publisher* for detailed procedures.

To add a currency format:

1. Click the Add icon.
2. Enter the ISO currency code, for example: USD, JPY, EUR, GBP, INR.
3. Enter the format mask to apply for this currency.

The Format Mask must be in the Oracle number format. The Oracle number format uses the components "9", "0", "D", and "G" to compose the format, for example: 9G999D00

where

9 represents a displayed number only if present in data

G represents the group separator

D represents the decimal separator

0 represents an explicitly displayed number regardless of incoming data

See *Using the Oracle Format Mask, Oracle Fusion Middleware Report Designer's Guide for Oracle Business Intelligence Publisher* for more information about these format mask components.

The following figure shows sample currency formats:

Administration



Administration > Currency Format

Runtime Configuration

Properties Font Mappings **Currency Formats**

Currency Format

[Add Currency Format](#)

Currency Code	Format Mask	Delete
INR	9G99G99G999D99	
USD	L9G999G999D99	

Diagnosics and Performance Monitoring in Oracle BI Publisher

This chapter covers the following topics:

- Diagnosing and Resolving Issues in Oracle BI Publisher
- Configuring Log Files
- Viewing Log Messages
- About Performance Monitoring and User Auditing
- Enabling Monitoring
- Viewing the Audit Log
- Configuring an Audit Repository
- Using BI Publisher to Create Audit Reports from Your Audit Repository
- Viewing Performance Statistics in the MBean Browser

Diagnosing and Resolving Issues in Oracle BI Publisher

System Administrators are typically responsible for supporting end users when they experience issues with the use of Oracle BI Publisher and for interacting with Oracle Support to understand the cause of issues and apply fixes.

Issues may be reported in response to end users receiving error messages, experiencing poor performance, or lack of availability.

The principal activities administrators perform to support issue resolution include:

- Examination of error and diagnostic log information. For more information, see:
 - About Diagnostic Log Files, page 13-2
 - Configuring Log Files, page 13-4

- Viewing Log Messages, page 13-5
- Examination of system and process metrics to understand availability and performance issues. For more information, see:
 - About Performance Monitoring and User Auditing, page 13-9
 - Enabling Monitoring, page 13-10
 - Viewing the Audit Log, page 13-15
 - Configuring an Audit Repository, page 13-15
 - Using BI Publisher to Create Audit Reports from Your Audit Repository, page 13-21
 - Viewing Performance Statistics in the MBean Browser, page 13-23

About Diagnostic Log Files

BI Publisher writes diagnostic log files in the Oracle Diagnostic Logging (ODL) format. Log file naming and the format of the contents of log files conforms to an Oracle standard. You can view log files by using the WLST `displayLogs` command, or you can download log files to your local client and view them using another tool (for example a text editor, or another file viewing utility).

Log files are created and edited using Oracle Fusion Middleware Control. By default, after install, the `bipublisher-handler` log is created. You can configure this log file or create a new logger.

About Log File Message Categories and Levels

Each log file message category is set to a specific default value between 1-32, and only messages with a level less or equal to the log level will be logged.

Five log file message categories exist as follows:

Level	Description
IncidentError:1	A serious problem caused by unknown reasons. You can only fix the problem by contacting Oracle support. Examples are errors from which you cannot recover or serious problems.

Level	Description
Error:1	A problem requiring attention from the system administrator has occurred, and is not caused by a bug in the product. No performance impact.
Warning:1	A potential problem that should be reviewed by the administrator. Examples are invalid parameter values or a specified file does not exist.
Notification:1	A major lifecycle event such as the activation or deactivation of a primary sub-component or feature. This is the default level for NOTIFICATION.
NOTIFICATION:16	A finer level of granularity for reporting normal events.
TRACE:1	Trace or debug information for events that are meaningful to administrators, such as public API entry or exit points.
TRACE:16	Detailed trace or debug information that can help Oracle Support diagnose problems with a particular subsystem.
TRACE:32	Very detailed trace or debug information that can help Oracle Support diagnose problems with a particular subsystem.

About Log File Formats

A log file must contain a consistent format. However, since there can be multiple formats, you can change the format used in a log file. When you change the format used in a log file, and the new format differs from the current log file's format, a new log file is created. For example, a log file containing ODL-XML, always contains XML, and will never be mixed with text.

Configure the log file format in the Edit Log File dialog (see Configuring Log Files, page 13-4). The format can be Text or XML.

About Log File Rotation

Log file rotation can be file size based or time based. Whenever a log file exceeds the rotation criterion, the existing log file is renamed, and a new log file is created.

The file naming looks like this:


- log.xml
- log.xml.1 (oldest log file)

- log.xml.n


Configuring Log Files

Configure log files in Oracle Fusion Middleware Control.


1. In Oracle Fusion Middleware Control, locate the BI Publisher server. For example:
Under Application Deployments, expand bipublisher (11.1.1) (bi_cluster), and then right-click bipublisher (11.1.1)(bi_server1)
2. From the menu, click **Logs** and then **Log Configuration**, as shown in the following figure:

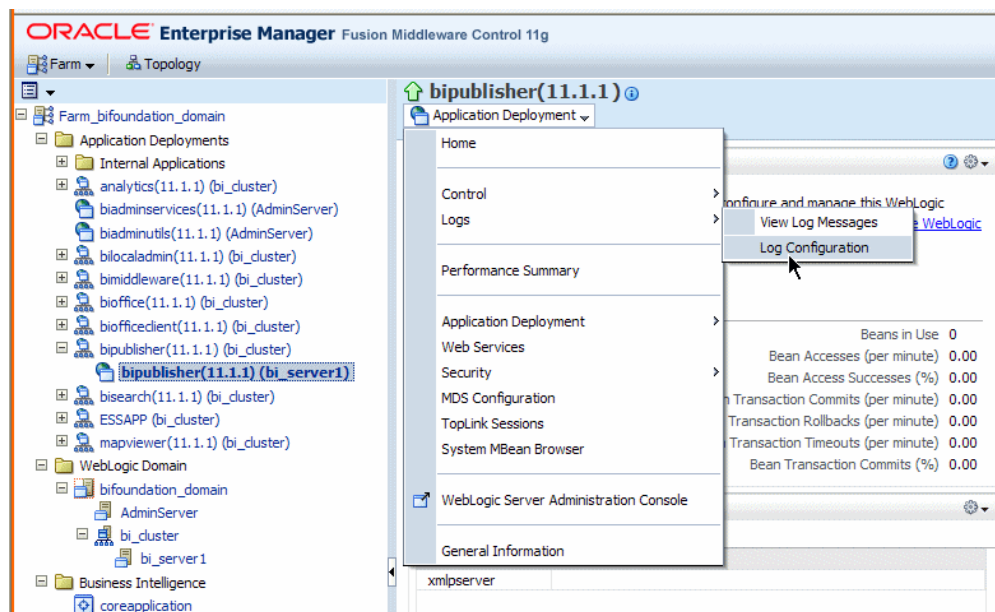

3. By default, the bipublisher-handler log is created. Select bipublisher-handler in the table and click **Edit Configuration**.

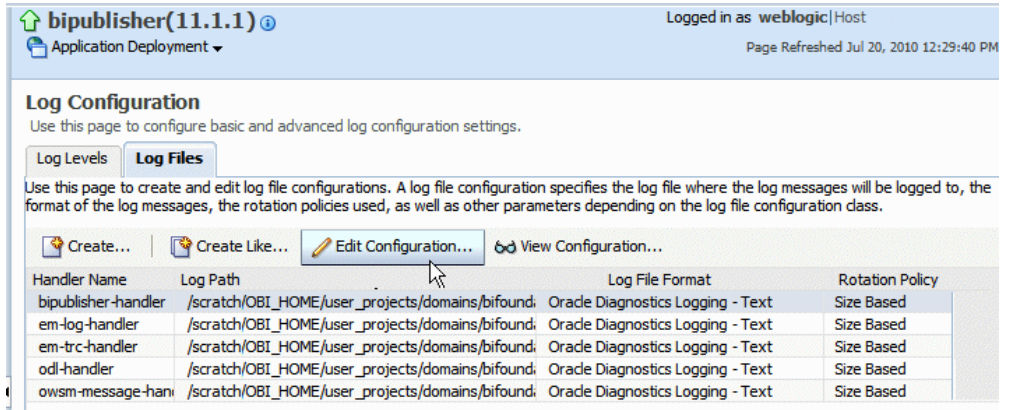

4. In the **Edit Configuration** dialog, set the **Log Level** and configure other options.

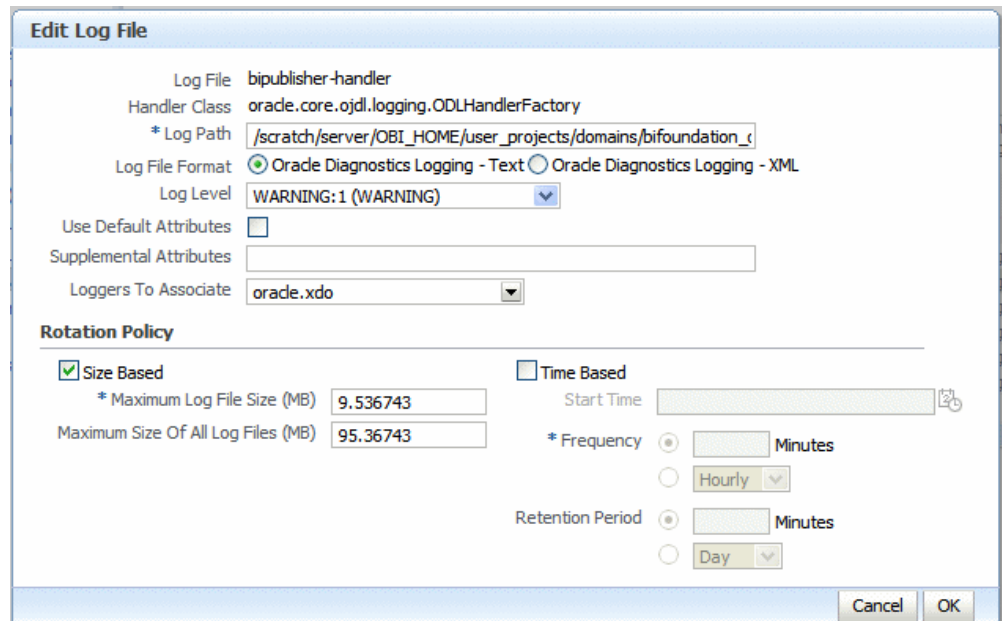


Viewing Log Messages

You can view log messages using Oracle Fusion Middleware Control or you can view the log files directly.

To view log messages in Oracle Fusion Middleware Control:

1. In Oracle Fusion Middleware Control, locate the BI Publisher server. For example:
Under Application Deployments, expand bipublisher (11.1.1) (bi_cluster), and then right-click bipublisher (11.1.1)(bi_server1)
2. From the menu, click **Logs** and then **View Log Messages**, as shown in the following

figure:

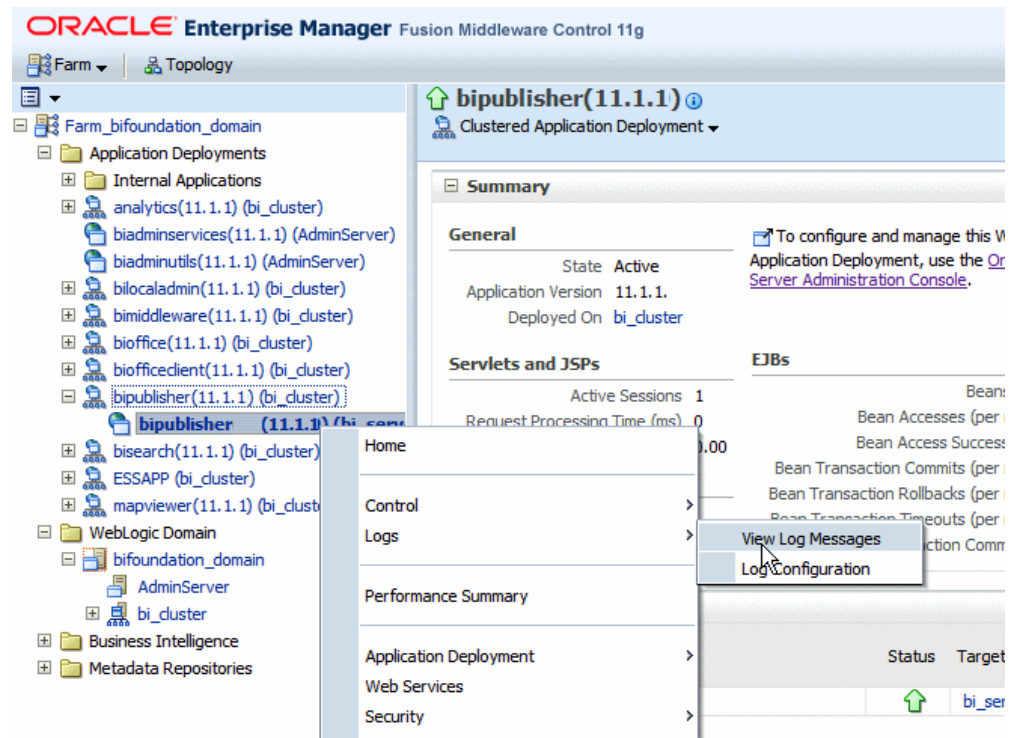

3. To view a specific log file, click **Target Log Files**.

... Broaden Target Scope Target Log Files... Manual Refresh

Search

Date Range: Most Recent 1 Days

* Message Types: Incident Error Error Warning Notification Trace Unknown

Message: contains

Search Add Fields

View Show Messages View Related Messages Export Messages to File

Time	Message Type	Message ID	Message
Jul 20, 2010 11:07:56 AM PDT	Error		End Memory: max=512MB, total=296MB, free=84MB
Jul 20, 2010 11:07:56 AM PDT	Error		End Memory: max=512MB, total=296MB, free=84MB
Jul 20, 2010 11:07:56 AM PDT	Warning		oracle.xdo.XDOException: Failed to get table view xml
Jul 20, 2010 11:07:56 AM PDT	Warning		oracle.xdo.XDOException: Failed to get table view xml at oracle.xdo.online.Viewer
Jul 20, 2010 11:07:56 AM PDT	Error		XSL error:
Jul 20, 2010 11:07:56 AM PDT	Error		XSL error: <Line 599, Column 65>: XML-23029: (Error) FORG0001: invalid value fo
Jul 20, 2010 11:07:56 AM PDT	Error		End Memory: max=512MB, total=296MB, free=114MB
Jul 20, 2010 11:07:56 AM PDT	Error		End Memory: max=512MB, total=296MB, free=114MB
Jul 20, 2010 11:07:56 AM PDT	Warning		oracle.xdo.XDOException: oracle.xdo.XDOException: java.lang.reflect.Invocation
Jul 20, 2010 11:07:56 AM PDT	Warning		oracle.xdo.XDOException: oracle.xdo.XDOException: java.lang.reflect.Invocation
Jul 20, 2010 11:07:56 AM PDT	Warning		oracle.xdo.XDOException: Failed to get table view xml

- From the **Log Files** page, select a specific log to view messages or download the log file.

Log Messages > Log Files

Log Files

View View Log File Download

Name	Directory	Log Type	Last Modified
bi_server1.log	/scratch/OBI_HOME/user_projects/domains/bifoundation_domain/servers/t	Server	Jul 20, 2010 3:36:19 PM PDT
bi_server1-diag	/scratch/OBI_HOME/user_projects/domains/bifoundation_domain/servers/t	Server	Jul 20, 2010 3:34:30 PM PDT
bipublisher.log	/scratch/OBI_HOME/user_projects/domains/bifoundation_domain/servers/t	Server	Jul 20, 2010 3:34:41 PM PDT
log.xml	/scratch/OBI_HOME/user_projects/domains/bifoundation_domain/servers/t	Server	Jul 20, 2010 3:34:41 PM PDT
diagnostic.log	/scratch/OBI_HOME/user_projects/domains/bifoundation_domain/servers/t	Server	Jul 15, 2010 6:08:02 PM PDT
emoms.log	/scratch/OBI_HOME/user_projects/domains/bifoundation_domain/servers/t	Server	Jul 15, 2010 6:08:04 PM PDT

- Click **View Log File** to view the messages.

The screenshot shows the Oracle Fusion Middleware Administrator's console. At the top, it says "bipublisher(11.1.1)" and "Application Deployment". The user is logged in as "weblogic|Host". The page was refreshed on Jul 20, 2010 1:56:37 PM PDT. The main content area is titled "View Log File: bipublisher.log". It shows the log file name as "/scratch/OBI_HOME/user_projects/domains/bifoundation_domain/servers/bi_server1/logs/bipublisher/bipublisher.log" and the last modified date as "Jul 20, 2010 1:35:35 PM PDT". There is a "Download" button. Below this, there are fields for "Date Range", "Time Interval", "Start Date" (7/15/10 6:09 PM), "End Date" (7/20/10 1:35 PM), and a "Search" button. A table of log messages is displayed with columns: Time, Message Type, Message ID, and Message. The messages include notifications and warnings, such as "GlobalContext.initResources" and "XdoUserTrackingListener - Initialization error: Task already scheduled or cancelled".

Viewing Messages by Reading the Log File

The log file is located in the directory specified in the Log Path in the Edit Log File dialog. Navigate to the directory on your server to view the log file:

```

log.xml
<msg time='2010-07-19T12:49:20.912-07:00' comp_id='bi_server1' type='WARNING' level='1' host_id=
host_addr='10.222.222.22' module='oracle.xdo' tid='12' user='&lt;anonymous>' ecid=
'0000IhgDn_5e_ApJ^T4if1CHALH000011' rid='0'>
<attr name='APP' value='bipublisher#11.1.1.3.0' />
<txt></txt>
</msg>
<msg time='2010-07-19T12:49:20.914-07:00' comp_id='bi_server1' type='WARNING' level='1' host_id=
host_addr='10.222.222.22' module='oracle.xdo' tid='12' user='&lt;anonymous>' ecid=
'0000IhgDn_5e_ApJ^T4if1CHALH000011' rid='0'>
<attr name='APP' value='bipublisher#11.1.1.3.0' />
<txt>[Security:090304]Authentication Failed:
User biadmin javax.security.auth.login.FailedLoginException:
[Security:090302]Authentication Failed: User biadmin denied</txt>
</msg>

```

The following example shows an ODL format error message:

```

<msg time="2009-07-30T16:00:03.150-07:00" comp_id="xdo" type="ERROR"
level="1" host_id="MyBIPHost" host_addr="120.19.168.17"
module="oracle.xdo" tid="11" user="Administrator">
<txt>Variable 'G_dept' is missing...</txt>
</msg>

```

Attribute Name	Description
time	The date and time when the message was generated. This reflects the local time zone.
comp_id	The ID of the component that originated the message.
type	The type of message. Possible values are: INCIDENT_ERROR, ERROR, WARNING, NOTIFICATION, TRACE, and UNKNOWN. See the following table for information about the message types.
level	The message level, represented by an integer value that qualifies the message type. Possible values are from 1 (highest severity) through 32 (lowest severity).
host_id	The name of the host where the message originated.
host_addr	The network address of the host where the message originated.
module	The ID of the module that originated the message. If the component is a single module, the component ID is listed for this attribute.
tid	The ID of the thread that generated the message.
user	The name of the user whose execution context generated the message.

About Performance Monitoring and User Auditing

Performance monitoring enables you to monitor the performance of queries, reports and document generation and to analyze the provided details. User auditing provides information about what users logged in, when, how many times, what reports they accessed, and other actions they took within the application.

BI Publisher collects performance statistics through JMX Management Beans or Mbeans. Each MBean reveals attributes, operations, and relevant statistics gathered by the Oracle Dynamic Monitoring Service (DMS). The following table summarizes the beans that are provided:

Management Bean	Description
ReportEventMonitor	Creates an Mbean per report and displays detailed monitoring data for the report.

Management Bean	Description
ServerEventMonitor	Exists per server and displays user and server activity summaries.
UserEventMonitor	Creates an Mbean per user and displays detailed monitoring data for the user.

Enabling Monitoring

To enable monitoring:

1. Update properties in the BI Publisher server configuration file.
2. Copy the component_events.xml file to your Middleware Home.
3. Configure the Audit Policy Settings with Fusion Middleware Control (Enterprise Manager)
4. Restart WebLogic Server.

Update Properties in the BI Publisher Server Configuration File

Locate the `xm1p-server-config.xml` file in the BI Publisher repository under `config/bipublisher/repository/Admin/Configuration/xm1p-server-config.xml` located under the Oracle BI Domain Home (for example: `MIDDLEWARE_HOME/user_projects/domains/bifoundation_domain/config/bipublisher/repository/Admin/Configuration`).

A sample configuration file is shown in the following figure:


```

<xmlpConfig xmlns="http://xmlns.oracle.com/oxp/xmlp">
  <property name="SAW_SESSION_TIMEOUT" value="90"/>
  <property name="DEBUG_LEVEL" value="exception"/>
  <property name="MONITORING_ENABLED" value="false"/>
  <property name="SAW_SERVER" value="da505"/>
  <property name="SECURITY_MODEL" value="ORACLE_AS_JPS"/>
  <property name="SAW_PASSWORD" value=""/>
  <property name="SAW_VERSION" value="v6"/>
  <property name="SAW_PROTOCOL" value="http"/>
  <property name="AUDIT_ENABLED" value="false"/>
  <property name="SAW_URL_SUFFIX" value="analytics/saw.dll"/>
  <property name="MONITORING_DEFAULT_HISTORY_SIZE" value="30"/>
  <property name="SAW_PORT" value="9704"/>
  <property name="SAW_USERNAME" value=""/>
</xmlpConfig>

```

Perform the following:

1. Make a backup of the file.
2. Add the following property to the file and set it to "true":

```
<property name="AUDIT_JPS_INTEGRATION" value="true"/>
```

This property enables the integration of performance monitoring and auditing with Oracle Fusion Middleware Control.

3. Update the properties in the following table to enable performance monitoring and auditing:

Property	Description
MONITORING_ENABLED	Set to "true" to enable monitoring. The default is "false".
AUDIT_ENABLED	Set to "true" to enable auditing. The default is "false".

Following is a sample configuration file with the properties updated:


```

<xmlpConfig xmlns="http://xmlns.oracle.com/oxp/xmlp">
  <property name="SAW_SERVER" value=""/>
  <property name="SAW_SESSION_TIMEOUT" value="90"/>
  <property name="DEBUG_LEVEL" value="exception"/>
  <property name="SAW_PORT" value=""/>
  <property name="SAW_PASSWORD" value=""/>
  <property name="SAW_PROTOCOL" value="http"/>
  <property name="SAW_VERSION" value="v4"/>
  <property name="SAW_USERNAME" value=""/>
  <property name="MONITORING_ENABLED" value="true"/>
  <property name="AUDIT_ENABLED" value="true"/>
  <property name="AUDIT_JPS_INTEGRATION" value="true"/>
</xmlpConfig>

```

Copy the component_events.xml File to Your Middleware Home


1. Navigate to the *MIDDLEWARE_HOME* /oracle_common/modules/oracle.iau_11.1.1/components directory.
2. In the components directory create a directory named "xmlpserver".
3. Locate the component_events.xml file in the BI Publisher repository under config/bipublisher/repository/Admin/Audit/component_events.xml located under the Oracle BI Domain Home (for example: *MIDDLEWARE_HOME* /user_projects/domains/bifoundation_domain/config/bipublisher/repository/Admin/Audit).
4. Copy the **component_events.xml** file to the newly created xmlpserver directory.

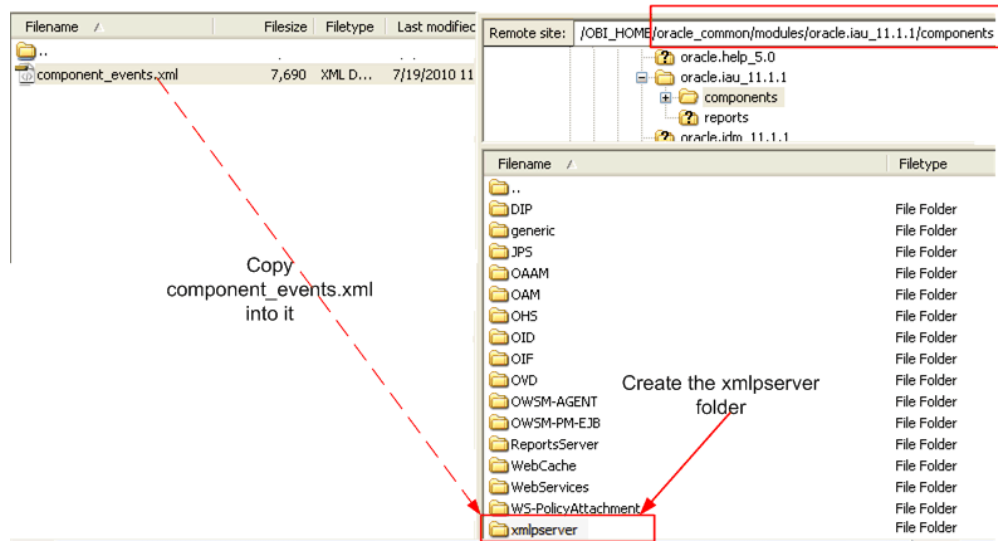

Configure the Audit Policy Settings with Fusion Middleware Control

To configure the audit policy settings:

1. In Oracle Fusion Middleware Control, under **WebLogic Domain**, right-click **bifoundation_domain**. From the menu click **Security** and then click **Audit Policy** as shown in the following figure:

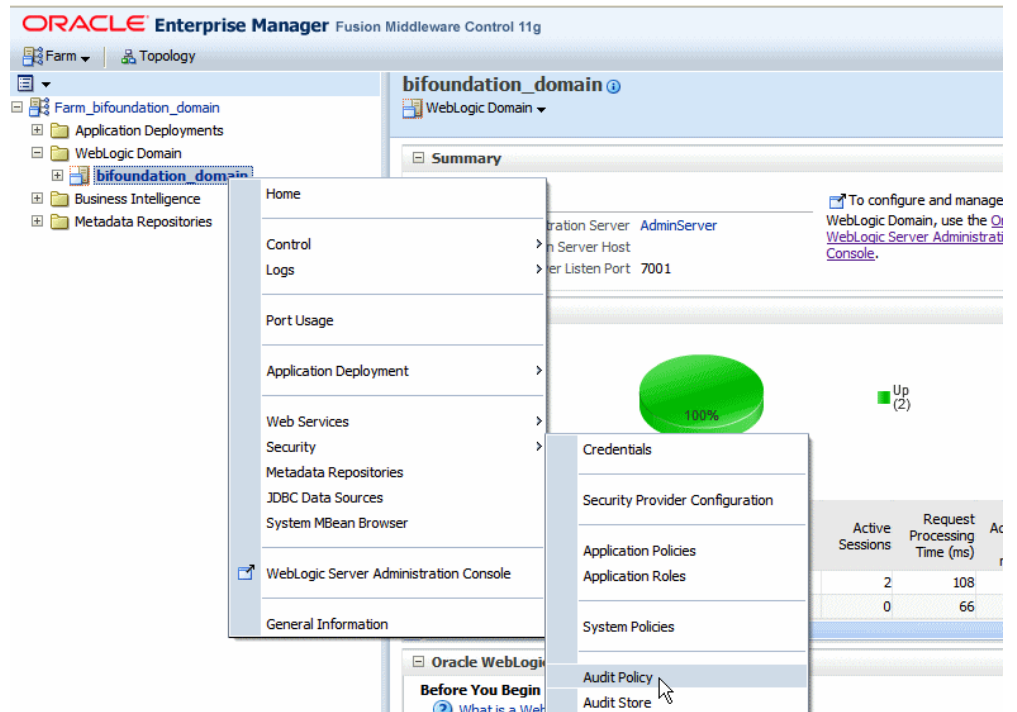

2. The **Audit Policy** table displays all the audited applications under the bifoundation_domain. Set the **Audit Level** to enable auditing for BI Publisher.

Information
All changes made in this page require a server restart to take effect.

Audit Policy Apply Revert

Use this page to view and set the audit policies for the Java EE applications deployed on this domain. To set the policies for System Components, such as Oracle HTTP Server, refer to the component's home page.

Audit Level: **Medium** | Select Failures Only | Export... | Import...

Name	<input type="checkbox"/> Enable Audit	Filter
<input type="checkbox"/> Oracle Web Services Manager - Policy Manager	<input checked="" type="checkbox"/>	
<input type="checkbox"/> Directory Integration Platform Server		
<input checked="" type="checkbox"/> BI Publisher Server	<input checked="" type="checkbox"/>	
<input type="checkbox"/> Oracle Adaptive Access Manager		
<input type="checkbox"/> Oracle Web Services	<input checked="" type="checkbox"/>	
<input type="checkbox"/> Oracle Web Services Manager - Policy Attachment		
<input type="checkbox"/> Oracle Platform Security Services		
<input type="checkbox"/> Oracle Web Services Manager - Agent		
<input type="checkbox"/> Reports Server	<input checked="" type="checkbox"/>	
<input type="checkbox"/> Oracle Identity Federation		
<input type="checkbox"/> Oracle Access Manager		

Users to Always Audit

Enter a comma-delimited list of user accounts that will always be audited. This ensures audit of specified user accounts, regardless of the policy settings.

Users:

You will most likely set the **Audit Level** to **Medium**. If you wish to customize the audit level for each event, select **Custom** from the **Audit Level** list. This will enable you to set the audit level for each event and apply filters.

The events that are audited for the BI Publisher server are:

- User Logins
- User Logouts
- Report Request
- Scheduled Request
- Report Republish
- Report Data Download
- Report Download
- Report Data Process
- Report Rendering
- Report Delivery

Restart WebLogic Server

Restart the WebLogic Server instance. You can do this using Oracle Fusion Middleware Control, or if you are running Windows, you can select "Stop BI Servers" and then "Start BI Servers" from the Start menu.

Viewing the Audit Log

If you set the property `AUDIT_JPS_INTEGRATION` to true, the audit log can be viewed under the `xmlpsrvr` folder under the WebLogic Server AdminServer directory:

`/AdminServer/logs/auditlogs/xmlpsrvr/audit.log`

Alternatively, if you can configure an audit repository in your database to store audit data in database tables instead of the log file (the file is not generated in this case). The collected data can be analyzed using reports provided by Audit Framework, or you can create your own reports using BI Publisher.

For more information on the reports provided by Audit Framework, see "Using Audit Analysis and Reporting" in the *Oracle Fusion Middleware Application Security Guide 11g*.

The following section describes how to set up the audit repository in your database to store the auditing data.

Configuring an Audit Repository


Configure an audit repository to store your auditing data collected by the Fusion Middleware Auditing Framework in database tables rather than a log file.

To set up the audit database in WebLogic Server:

1. Create the audit schema using RCU.
2. Create a data source in your WebLogic server.
3. Register the audit database to your domain.

Creating the Audit Schema Using RCU

1. Go to `$RCU_HOME/bin` and execute the `rcu` command.
2. Choose **Create** at the starting screen and click **Next**.
3. Enter your database details and click **Next**.
4. Choose the option to create a new prefix, and enter a prefix; for example: BIP
5. Select **Audit Services** from the list of schemas (shown in the following figure).

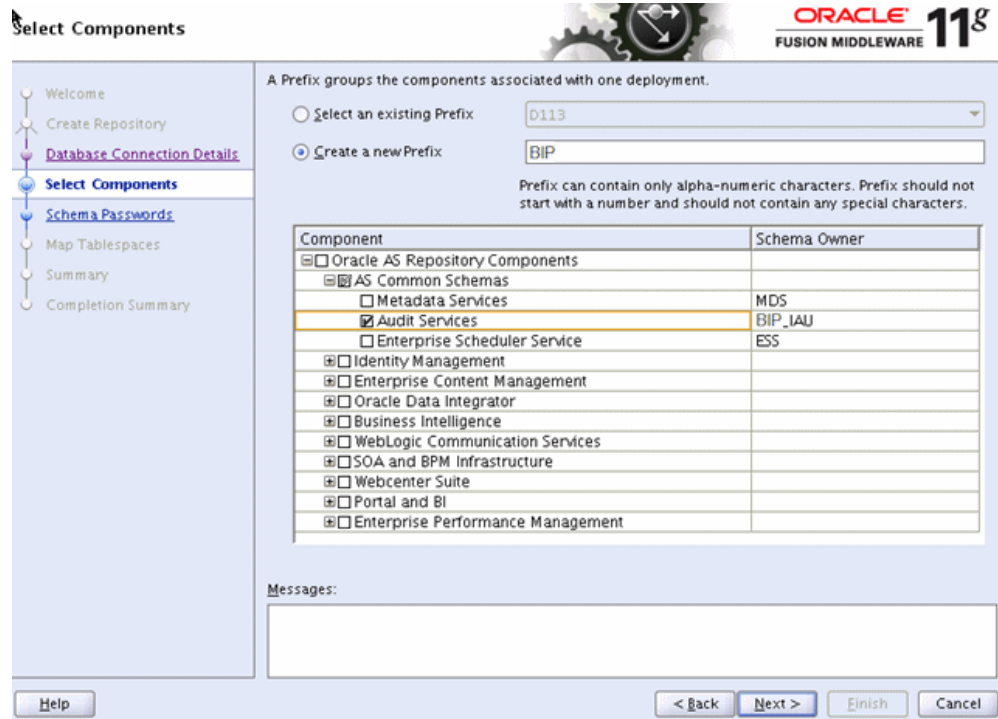

6. Click **Next** and accept the tablespace creation.

7. Click **Finish** to start the process.

When the Repository Creation Utility process finishes, the following three audit-related schemas will be created in your database:


- <prefix>_IAU (for example: BIP_IAU)
- <prefix>_IAU_APPEND (for example: BIP_IAU_APPEND)
- <prefix>_IAU_VIEWER (for example: BIP_IAU_VIEWER)

Create a Data Source in WebLogic Server

After you create a database schema for your auditing data, next create a JDBC connection on your WebLogic Server so the Audit Framework can access the database schema that was created with the RCU in the previous step.

To create the JDBC connection:

1. Connect to the Oracle WebLogic Server administration console:
http://hostname:port/console (e.g. http://report.oracle.com:7001/console)
2. Under **Services**, click the **Data Sources** link, as shown in the following figure:

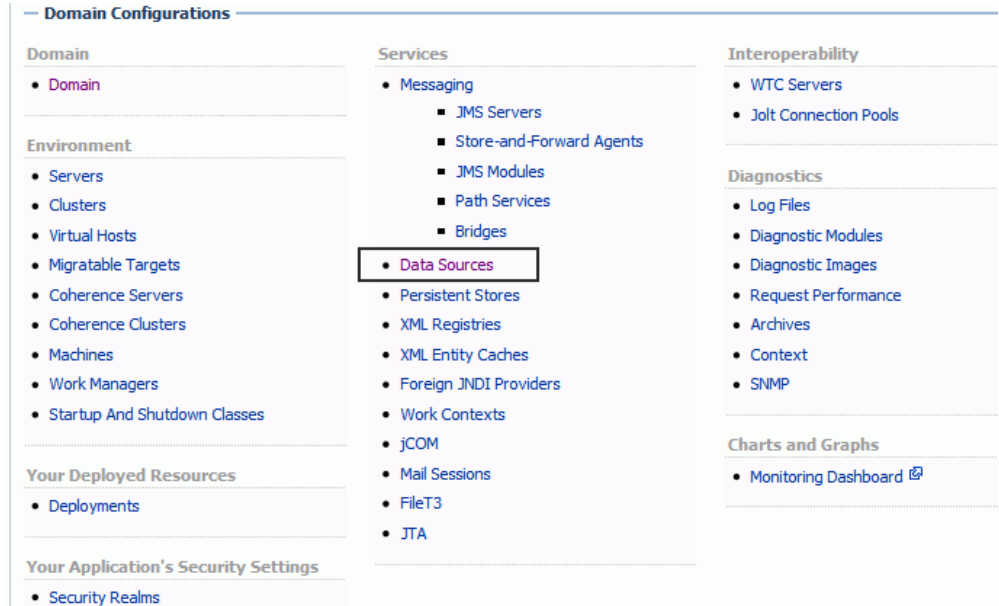

3. Click **Lock and Edit**.
4. On the **Summary of JDBC Data Sources** page, click **New** and then click **Generic Data Source**.
5. Enter the following details for the new data source:
 - **Name**
Example: Audit Data Source-0
 - **JNDI Name**
Example: jdbc/AuditDB
 - **Database Type**
Example: Oracle

The following figure shows the example entries:


Create a New JDBC Data Source

Back | Next | Finish | Cancel


JDBC Data Source Properties

The following properties will be used to identify your new JDBC data source.
 * Indicates required fields


What would you like to name your new JDBC data source?

 * **Name:**

What JNDI name would you like to assign to your new JDBC Data Source?

 **JNDI Name:**

What database type would you like to select?

Database Type: 

Back | Next | Finish | Cancel

6. Click **Next** and select the database driver. Choose "Oracle's Driver (Thin XA) Versions: 9.0.1 or later" if you are using Oracle database, and click **Next**.
7. In the **Connections Properties** page, enter the following:
 - **Database Name:** Enter the name of the database (SID) to which you will connect.
 - **Host Name:** Enter the hostname of the database.
 - **Port:** Enter the database port.
 - **Database User Name:** Enter the name of the audit schema that you created in RCU. The suffix is always `_IAU` for the audit schema. For example, if you supplied the prefix as "BIP", then the schema name would be "BIP_IAU".
 - **Password:** Enter the password for the audit schema that you created in RCU.

An example **Connections Properties** page is shown in the following figure:

Create a New JDBC Data Source

Back | Next | Finish | Cancel

Connection Properties
Define Connection Properties.

What is the name of the database you would like to connect to?

Database Name:

What is the name or IP address of the database server?

Host Name:

What is the port on the database server used to connect to the database?

Port:

What database account user name do you want to use to create database connections?

Database User Name:

What is the database account password to use to create database connections?

Password:

Confirm Password:


Back | Next | Finish | Cancel

8. Click **Next**. Accept the defaults, and click **Test Configuration** to verify the connection.
9. Click **Next**. Select the listed servers where you want to make this JDBC connection available.
10. Click **Finish** and then click **Activate Changes** in the **Change Center**.

Register the Audit-Storage Database to Your Domain

To register the JNDI/JDBC data source as your auditing data storage with Fusion Middleware Control (Enterprise Manager):

1. Log in to Fusion Middleware Control.
2. Navigate to the WebLogic Domain, right click **bifoundation_domain**, then select **Security**, then **Audit Store**. The navigation path is shown in the following figure:

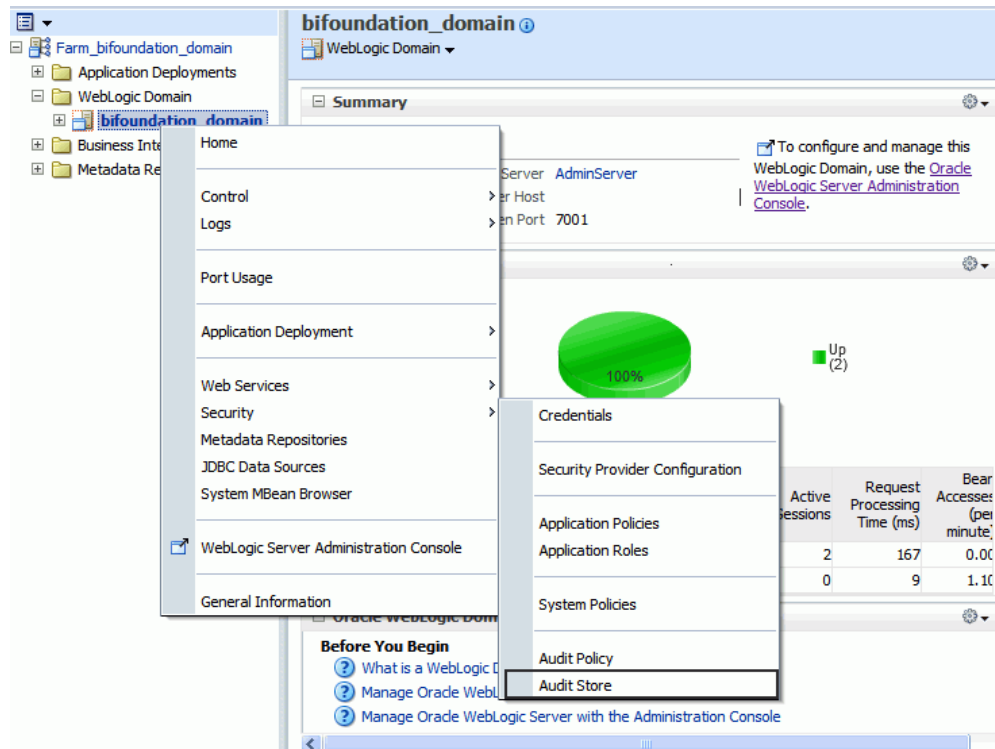

3. Click **Search Data Sources**. From the **Select Data Source** dialog, select the data source you created and click **OK**.
4. Click **Apply** to continue
5. Restart WebLogic Server.

When the WebLogic Server is restarted, BI Publisher will store all auditing data into the database table called "IAU_BASE". To verify this procedure, try logging in to BI Publisher and opening a few reports. You should see the activity audited in the "IAU_BASE" table. If not, check the log file, which is located at:
 \$BI_HOME/user_projects/domains/bifoundation_domain/servers/AdminServer/logs/AdminServer-diagnostic.log

for possible errors. Once the data is successfully loading to the database tables, you can design your own auditing reports using BI Publisher.

Using BI Publisher to Create Audit Reports from Your Audit Repository

Once you have the auditing repository set up, you can use BI Publisher to create your own reports to visualize your auditing data. To create a report on your auditing data in BI Publisher:

1. Register the data source in BI Publisher.
2. Create a data model.
3. Create the report.

Registering the Data Source in BI Publisher

Register the audit data source (JNDI/JDBC connection) that you created in the previous procedure as a JNDI data source in BI Publisher. Because you created a JDBC connection registered as JNDI, you do not need to create a new JDBC connection by typing the connection URL, username/password, and so on. You can just register it using the JNDI name (for example: jdbc/AuditDB).

1. Log in to BI Publisher with administrator privileges and click the **Administration** link.
2. Under **Data Sources**, click **JNDI Connection**, then click **Add Data Source**.
3. Enter the **Data Source Name** and **JNDI Name**. The **JNDI Name** is the name you provided in the WebLogic Console as the auditing data source (for example jdbc/AuditDB).
4. Click **Test Connection** to ensure that the data source connection works.
5. Add the appropriate roles to the data source so that the report developers and consumers can view the reports built on this data source.
6. Click **Apply** to save.

Creating a Data Model

To create a data model from your auditing data source:

Note: For the complete guidelines for developing data models in BI Publisher, see the *Oracle Fusion Middleware Data Modeling Guide for Oracle Business Intelligence Publisher*.

1. On the global header, click **New** and then click **Data Model**.

2. Set the **Default Data Source** to the audit JNDI data source.
3. Select **SQL Query** for your data set
4. Use the Query Builder to build a query or just type a SQL query against the IAU_BASE table. The IAU_BASE table contains all the auditing data for other products running on the WebLogic Server such as JPS, OID, and so on. To create a data model that contains only the BI Publisher data, then you can filter the data based on the value of the IAU_COMPONENTTYPE column that contains the product name. For BI Publisher, the value is "xmlpserver".

The following SQL query sample selects only BI Publisher data:

```
select      "IAU_BASE"."IAU_COMPONENTTYPE" as "IAU_COMPONENTTYPE",
           "IAU_BASE"."IAU_EVENTTYPE" as "IAU_EVENTTYPE",
           "IAU_BASE"."IAU_EVENTCATEGORY" as "IAU_EVENTCATEGORY",
           "IAU_BASE"."IAU_TSTZORIGINATING" as "IAU_TSTZORIGINATING",
           to_char("IAU_TSTZORIGINATING", 'YYYY-MM-DD') IAU_DATE,
           to_char("IAU_TSTZORIGINATING", 'DAY') as IAU_DAY,
           to_char("IAU_TSTZORIGINATING", 'HH24') as IAU_HH24,
           to_char("IAU_TSTZORIGINATING", 'WW') as IAU_WEEK_OF_YEAR,
           "IAU_BASE"."IAU_INITIATOR" as "IAU_INITIATOR",
           "IAU_BASE"."IAU_RESOURCE" as "IAU_RESOURCE",
           "IAU_BASE"."IAU_TARGET" as "IAU_TARGET",
           "IAU_BASE"."IAU_MESSAGETEXT" as "IAU_MESSAGETEXT",
           "IAU_BASE"."IAU_FAILURECODE" as "IAU_FAILURECODE",
           "IAU_BASE"."IAU_REMOTEIP" as "IAU_REMOTEIP"
from        "BIP_IAU"."IAU_BASE" "IAU_BASE"
where "IAU_BASE"."IAU_COMPONENTTYPE" = 'xmlpserver'
```

5. To test your data model, click **Get XML Output**. Select a sample size, and run your data model. Save the sample XML to your data model.
6. Save your data model.

Creating the Report


Now you can use one of the BI Publisher's layout options to design the report layout and visualize the auditing data. To create a report using the BI Publisher layout editor: .

1. On the global header, click **New** and then click **Report**.
2. Select the data model you created in the previous procedure.
3. To use the layout editor, click **Add New Layout**, and then click one of the **Basic Templates** to get started.

For complete instructions on using the layout editor, see the topic: "Creating a BI Publisher Layout Template" in the Help or in the *Oracle Fusion Middleware Report Designer's Guide for Oracle Business Intelligence Publisher*.

The following figure shows using the layout editor to design a report based on the

auditing data:

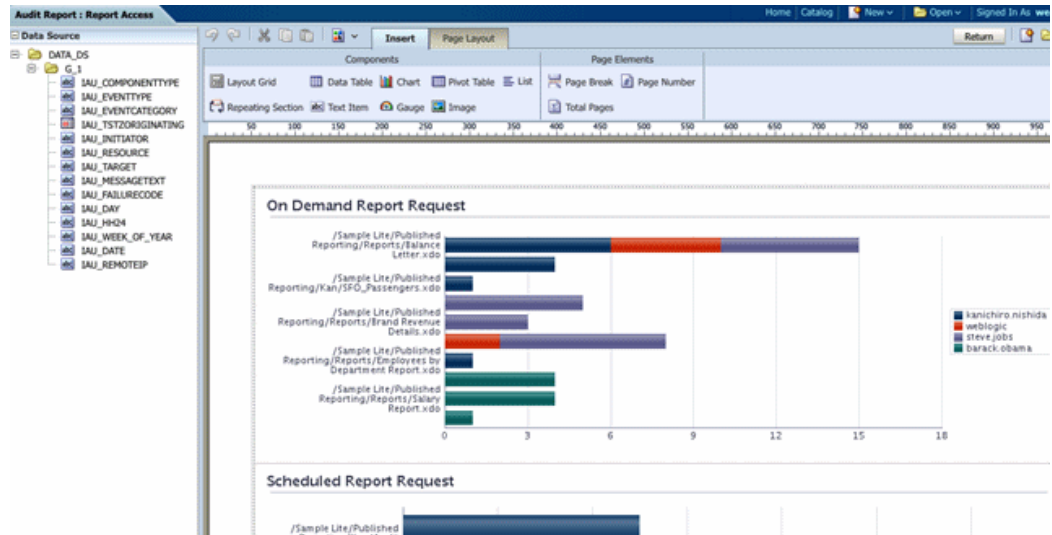


The following figure shows a sample completed auditing report displayed in the report viewer:



Viewing Performance Statistics in the MBean Browser

To view the performance statistics collected by the Report Event Monitor, Service Event Monitor, and User Event Monitor, navigate to the System MBean browser as follows:

1. In Oracle Fusion Middleware Control, locate the BI Publisher server. For example: Under Application Deployments, expand bipublisher (11.1.1) (bi_cluster), and then right-click bipublisher (11.1.1)(bi_server1)
2. From the menu, click System MBean Browser, as shown in the following figure:

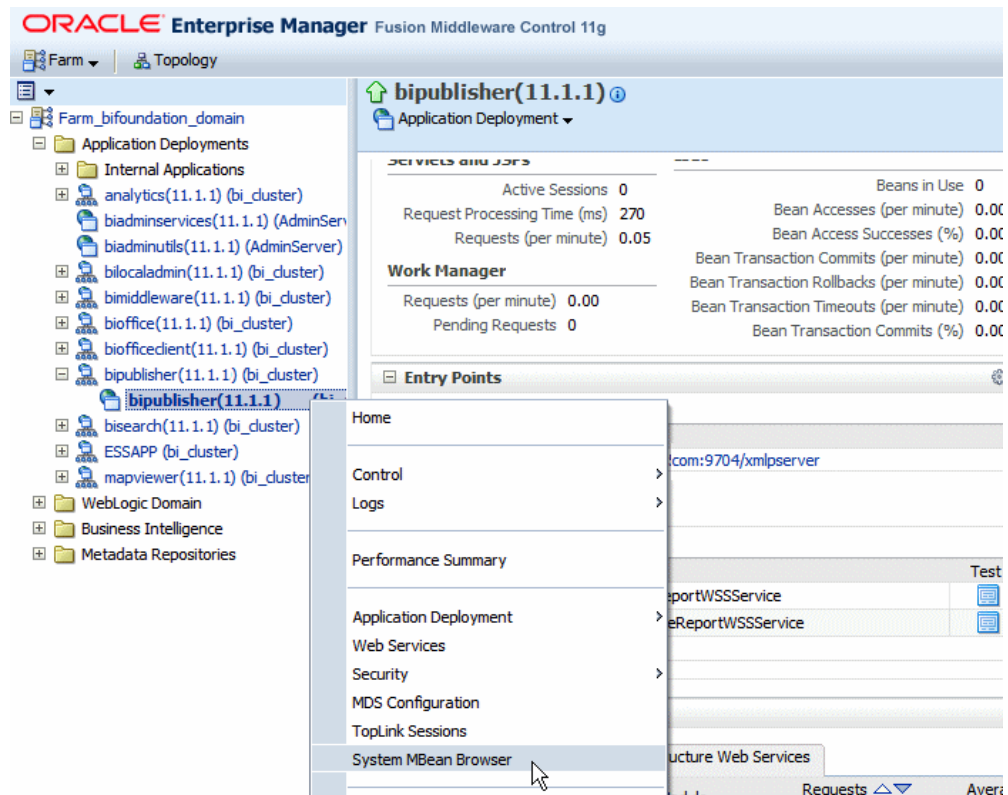

3. In the System MBean Browser, under the Application Defined MBeans, expand the oracle.xdo folder to view the BI Publisher MBeans. Expand the list and select the bean to view the details.

- Farm_bifoundation_domain
 - Application Deployments
 - Internal Applications
 - analytics(11.1.1) (bi_cluster)
 - biadminservices(11.1.1) (AdminSer)
 - biadminutils(11.1.1) (AdminServer)
 - bilocaladmin(11.1.1) (bi_cluster)
 - bimiddleware(11.1.1) (bi_cluster)
 - bioffice(11.1.1) (bi_cluster)
 - biofficedient(11.1.1) (bi_cluster)
 - bipublisher(11.1.1) (bi_cluster)
 - bipublisher(11.1.1) (bi :**
 - bisearch(11.1.1) (bi_cluster)
 - ESSAPP (bi_cluster)
 - mapviewer(11.1.1) (bi_cluster)
- WebLogic Domain
- Business Intelligence
- Metadata Repositories

bipublisher(11.1.1) Application Deployment

System MBean Browser

- oracle.bi.adminutils
- oracle.biee.admin
- oracle.biee.local
- oracle.dfw
- oracle.dms
- oracle.dms.event.config
- oracle.j2ee.config
- oracle.javatools.cache
- oracle.joc
- oracle.jocssl
- oracle.jrf
- oracle.jrf.server
- oracle.logging
- oracle.mds.lcm
- oracle.wsm.upgrade
- oracle.xdo
 - Domain: bifoundation_domain
 - Server: AdminServer
 - Server: bi_server 1
 - BIPDomain
 - ReportEventManager
 - ServerEventManager
 - UserEventManager
 - oracle.xdo.admin

Adding Translations for the BI Publisher Catalog and Reports

Introduction

In release 11g, BI Publisher supports two types of translation:

- Catalog Translation
- Template (or layout) Translation

Catalog translation enables the extraction of translatable strings from all objects contained in a selected catalog folder into a single translation file; this file can then be translated and uploaded back to BI Publisher and assigned the appropriate language code.

Catalog translation extracts not only translatable strings from the report layouts, but also the user interface strings that are displayed to users, such as catalog object descriptions, report parameter names, and data display names.

Users viewing the catalog will see the item translations appropriate for the UI Language they selected in their My Account preferences. Users will see report translations appropriate for the Report Locale they selected in their My Account preferences.

Template translation enables the extraction of the translatable strings from a single RTF-based template (including sub templates and style templates) or a single BI Publisher layout template (.xpt file). Use this option when you only need the final report documents translated. For example, your enterprise requires translated invoices to send to German and Japanese customers.

This chapter describes the process of downloading and uploading translation files. For more information on the concepts and processes of translating the files see the part "Translating Reports and Catalog Objects" in the *Oracle Fusion Middleware Report Designer's Guide for Oracle Business Intelligence Publisher*.


Limitations of Catalog Translation

- If you have existing XLIFF file translations for specific reports and then you import a catalog translation file for the folder in which the existing translations reside, the existing XLIFF files will be overwritten.


Exporting and Importing a Catalog Translation File

This procedure describes the process of exporting an XLIFF file from the catalog, importing the translated file back to the catalog, and testing the translation. Importing and Exporting XLIFF files can only be performed by an Administrator.


1. Select the folder in the catalog, click the **Translation** toolbar button, and then click **Export XLIFF**, as shown in the following figure:

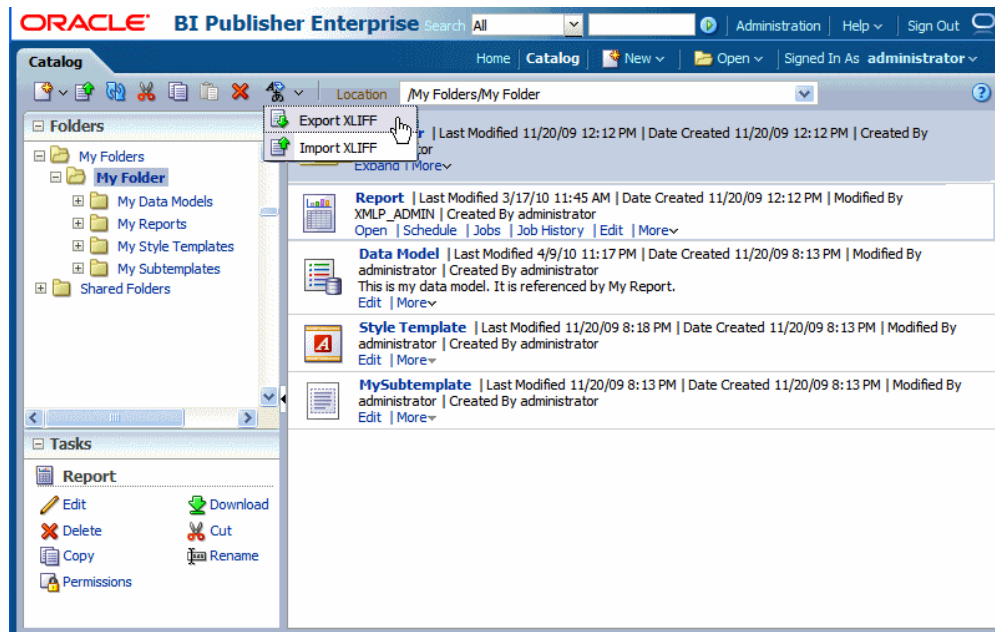

2. Save the XLIFF file to a local directory.

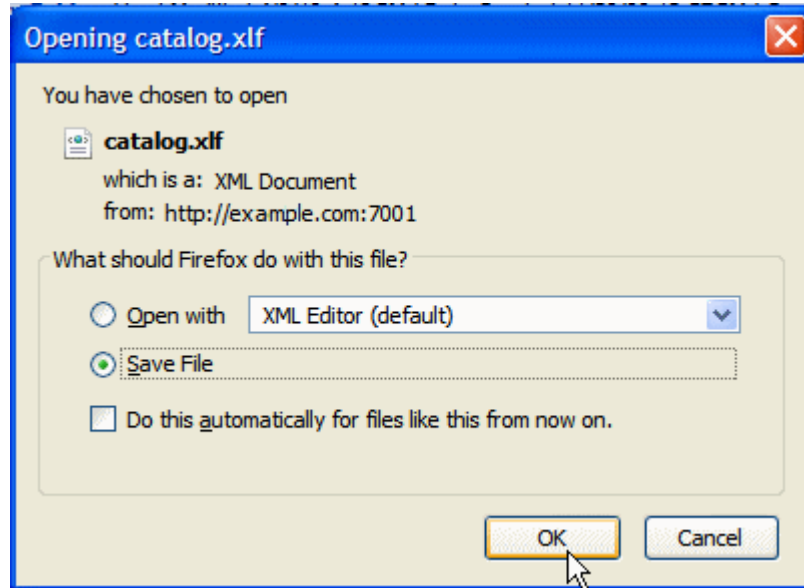


3. Open the Translation file (catalog.xlf) and apply translations to the Boilerplate text. Refer to the topic "What Is an XLIFF?" in the *Oracle Fusion Middleware Report Designer's Guide for Oracle Business Intelligence Publisher* for details on how to translate an XLIFF file.

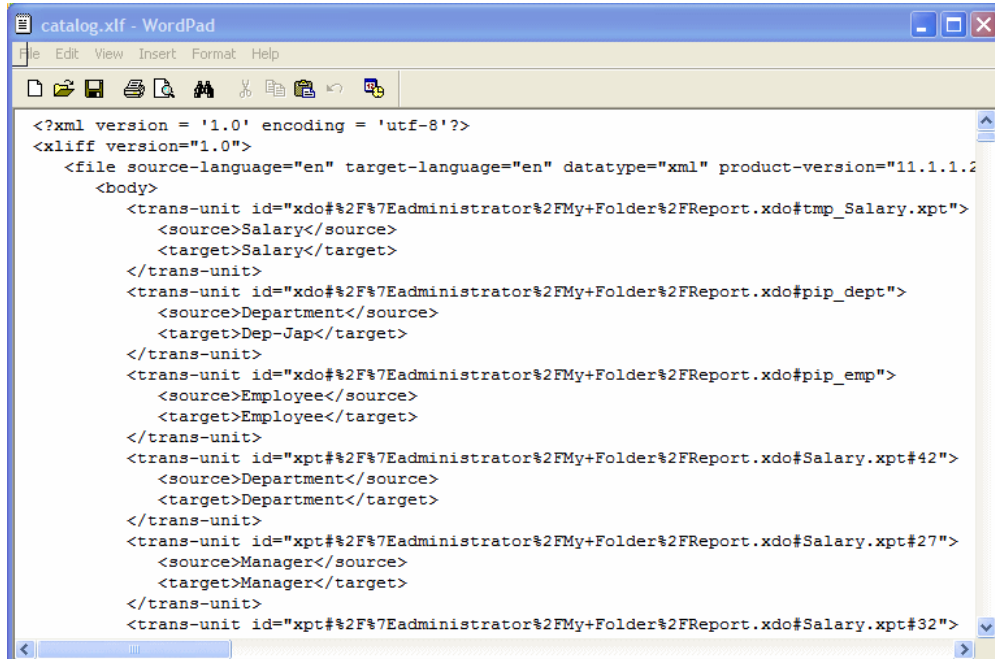


```
<?xml version = '1.0' encoding = 'utf-8'?>
<xliff version="1.0">
  <file source-language="en" target-language="en" datatype="xml" product-version="11.1.1.2">
    <body>
      <trans-unit id="xdo#%2F%7Eadministrator%2FMy+Folder%2FReport.xdo#tmp_Salary.xpt">
        <source>Salary</source>
        <target>Salary</target>
      </trans-unit>
      <trans-unit id="xdo#%2F%7Eadministrator%2FMy+Folder%2FReport.xdo#pip_dept">
        <source>Department</source>
        <target>Dep-Jap</target>
      </trans-unit>
      <trans-unit id="xdo#%2F%7Eadministrator%2FMy+Folder%2FReport.xdo#pip_emp">
        <source>Employee</source>
        <target>Employee</target>
      </trans-unit>
      <trans-unit id="xpt#%2F%7Eadministrator%2FMy+Folder%2FReport.xdo#Salary.xpt#42">
        <source>Department</source>
        <target>Department</target>
      </trans-unit>
      <trans-unit id="xpt#%2F%7Eadministrator%2FMy+Folder%2FReport.xdo#Salary.xpt#27">
        <source>Manager</source>
        <target>Manager</target>
      </trans-unit>
      <trans-unit id="xpt#%2F%7Eadministrator%2FMy+Folder%2FReport.xdo#Salary.xpt#32">
```

4. After the file is translated, upload the XLIFF file to the BI Publisher server: Click the **Translation** toolbar button, then click **Import XLIFF**. Upload the translated XLIFF to the server.
5. To test the translation, go to My Account:

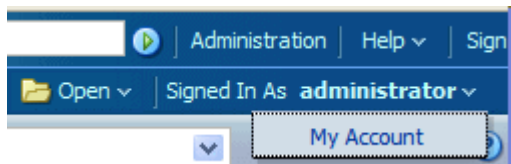

6. Change the Report Locale and the UI Language preferences:

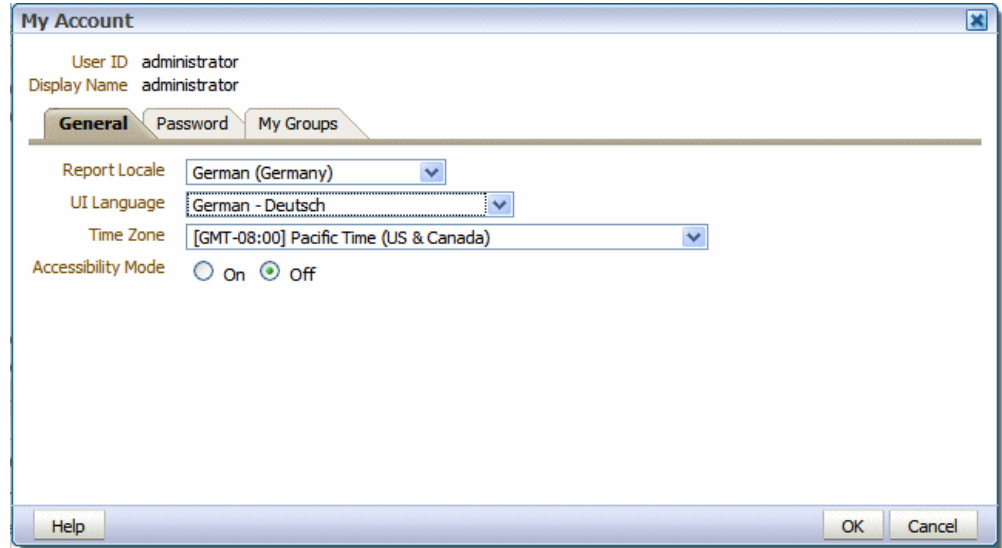


7. View the objects in the translated folder.

Template Translation

Template translation includes

- RTF templates
- RTF sub templates
- Style templates
- BI Publisher templates (.xpt)

RTF and BI Publisher (.xpt) templates can be translated from the **Properties** page. To access the **Properties** page, click the Properties link for the layout in the Report Editor.

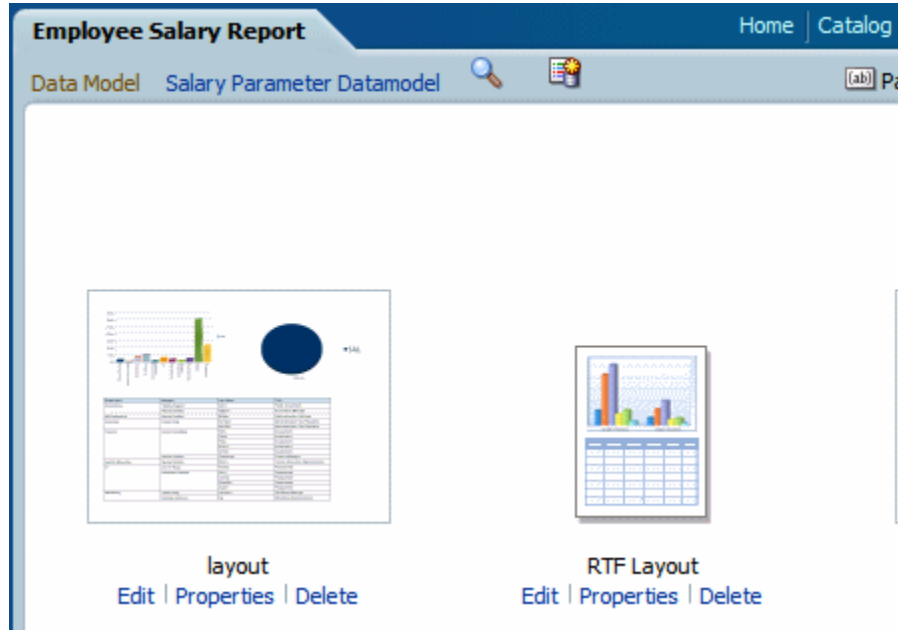

From the **Properties** page you can generate an XLIFF file for a single template. Click **Extract Translation** to generate the XLIFF file.

Generating the XLIFF from the Layout Properties Page

For report layout templates:

1. Navigate to the report in the catalog and click **Edit** to open it for editing.
2. From the thumbnail view of the report layouts, click the **Properties** link of the layout (RTF or XPT) to open the **Layout Properties** page.
3. In the **Translations** region, click **Extract Translation**.
BI Publisher extracts the translatable strings from the template and exports them to an XLIFF (.xlf file).
4. Save the XLIFF to a local directory.

For style templates and sub templates:

1. Navigate to the style template or sub template in the catalog and click **Edit** to open the Template Manager.
2. In the **Translations** region, click **Extract Translation**.
BI Publisher extracts the translatable strings from the template and exports them to an XLIFF (.xlf file).
3. Save the XLIFF to a local directory.

Translating the XLIFF

Once you have downloaded the XLIFF, it can be sent to a translation provider, or using a text editor, you can enter the translation for each string. See *Structure of the XLIFF File*, *Oracle Fusion Middleware Report Designer's Guide for Oracle Business Intelligence Publisher* for instructions on how to edit the XLIFF file.

A "translatable string" is any text in the template that is intended for display in the published report, such as table headers and field labels. Text supplied at runtime from the data is not translatable, nor is any text that you supply in the Microsoft Word form fields.

You can translate the template XLIFF file into as many languages as desired and then associate these translations to the original template.


Uploading the Translated XLIFF to BI Publisher

1. Navigate to the report, sub template, or style template in the catalog and click **Edit** to open it for editing.

For reports only:

From the thumbnail view of the report layouts, click the **Properties** link of the layout to open the Template Manager.

2. In the **Translations** region, click the **Upload** toolbar button.

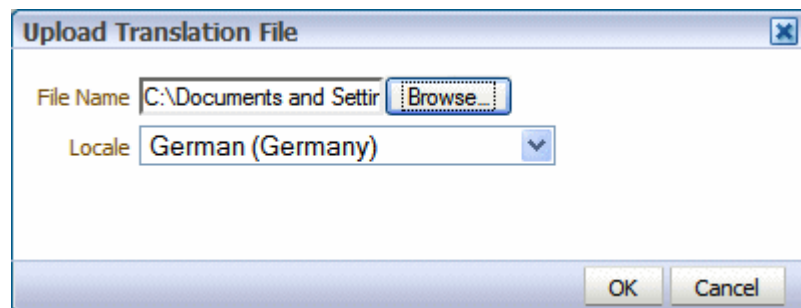

3. In the **Upload Translation File** dialog, locate the file in your local directory and select the **Locale** for this translation.
4. Click OK to upload the file and view it in the **Translations** table.

Using the Localized Template Option

If you need to design a different layout for the reports that you present for different localizations, you can create new RTF file that is designed and translated for the locale and upload this file to the Template Manager.

Note: The localized template option is not supported for XPT templates.

The process overview for using the localized template option is:

1. Design the localized RTF layout template, subtemplate, or style template.
2. Upload the localized file to the Template Manager.

Designing the Localized Template File

Use the same tools you used to create the base template file, translating the strings and customizing the layout as desired for the locale.


Uploading the Localized Template to BI Publisher

1. Navigate to the report, subtemplate, or style template in the catalog and click **Edit** to open it for editing.

For reports only:

From the thumbnail view of the report layouts, click the **Properties** link of the layout to open the Template Manager.

2. In the **Templates** region, click the **Upload** toolbar button.

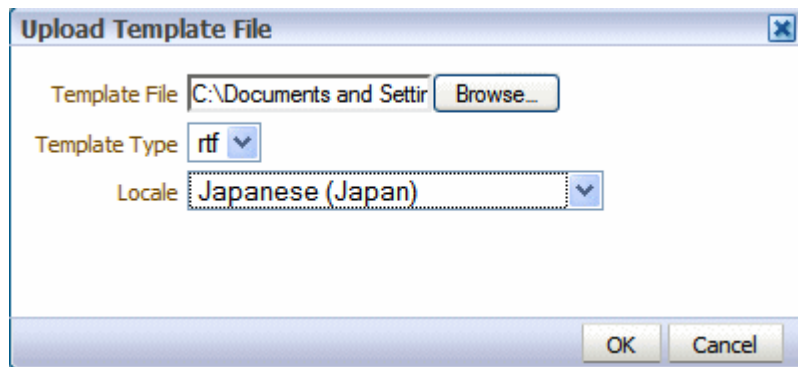

3. In the **Upload Template File** dialog, locate the file in your local directory, select rtf as the **Template Type** and select the **Locale** for this template file.
4. Click OK to upload the file and view it in the **Templates** table.

Moving Catalog Objects Between Environments

This chapter covers the following topics:

- Overview
- Preparing to Use the BI Publisher Catalog Utility
- Exporting BI Publisher Reporting Objects
- Importing BI Publisher Reporting Objects
- Generating Translation Files and Checking for Translatability

Overview


The BI Publisher catalog utility enables administrators and report developers to export the reporting object-related files from the catalog where all BI Publisher reports are stored, and to import them to a different catalog. Use this tool to manage BI Publisher reports using a third party tool as a source control or when you need to move a specific set of reports from a development environment to a quality assurance or production environment. The catalog utility can also be used to help manage translations of reporting objects.

Use the BI Publisher catalog utility to perform the following tasks:

- Export BI Publisher reports from the catalog
- Import BI Publisher reports into the catalog
- Extract translatable strings and generate a translation file (XLIFF)
- Generate a security.xml file that contains the reporting object-level permission settings

When to Use the Catalog Utility

Use the catalog utility to move BI Publisher report artifacts from one environment to another. For example, use the catalog utility to move reports from a development environment to a quality assurance environment. This process is illustrated in the following diagram:

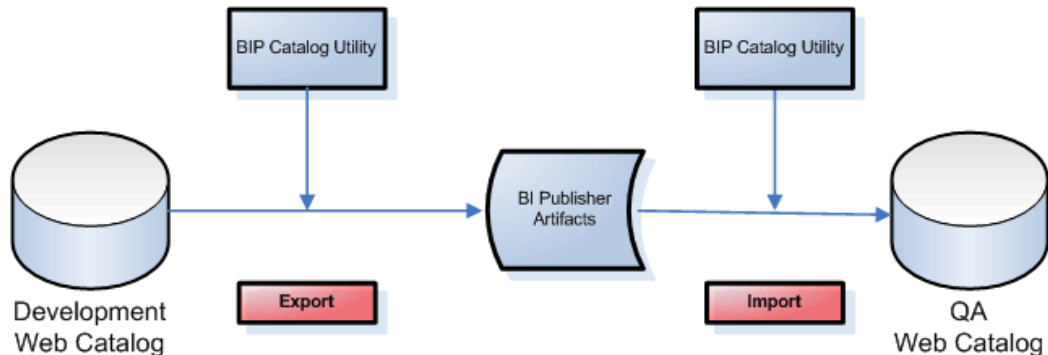

Other Options for Moving Catalog Objects

If you need to download or upload a small number of objects, the download feature of the BI Publisher catalog enables you to bundle and download multicomponent objects (such as reports) in an archive file. You can then use the upload feature to unarchive the data to another location in the catalog. For more information about this feature, see *Downloading and Uploading Catalog Objects* in the *Oracle Fusion Middleware User's Guide for Oracle Business Intelligence Publisher*.

Caution: Do Not Manually Edit the BI Publisher Files in the File System

BI Publisher uses metadata files to maintain information about catalog objects. Manually editing objects in the file system can result in the corruption of the metadata files. If the metadata file becomes corrupt it is possible to restore it by deleting the corrupt file and restarting BI Publisher.

What Files Are Moved

The following table lists the files that are included when you export an object from the catalog:

Object	Files
Report Example: Balance+Letter.xdo	<ul style="list-style-type: none"> • <code>_report.xdo</code> - the report definition file • <code>xdo.cfg</code> - the configuration file that contains the report property settings • <code>~metadata.meta</code> - metadata file that contains the catalog path information. This file is used by the utility to import objects back to their original locations. • <code>security.xml</code> file - specifies the object level permissions defined for the report • template files - all template files loaded to the report definition. The file names will include language suffix, for example: <code>My_RTF_template_en_us.rtf</code>, <code>My_BIP_layout_en_us.xpt</code> • translation files - all translation files (<code>.xlf</code>), for example: <code>My_RTF_template_jp_jp.xlf</code>
Data Model Example: myDataModel.xdm	<ul style="list-style-type: none"> • <code>_datamodel.xdm</code> - the report definition file • <code>~metadata.meta</code> - metadata file that contains the catalog path information. This file is used by the utility to import objects back to their original locations. • <code>security.xml</code> file - specifies the object level permissions defined for the data model
Subtemplate Example: mysubtempate.xsb	<ul style="list-style-type: none"> • <code>_template_en_us.rtf</code> - the subtemplate file with locale designation • <code>~metadata.meta</code> - metadata file that contains the catalog path information. This file is used by the utility to import objects back to their original locations. • <code>security.xml</code> file - specifies the object level permissions defined for the subtemplate • translation files - any translations, when present; for example: <code>_template_jp_jp.rtf</code>

Object	Files
Style Template Example: myStyleTemplate.xss	<ul style="list-style-type: none"> • <code>_template_en_us.rtf</code> - the style template file with locale designation • <code>~metadata.meta</code> - metadata file that contains the catalog path information. This file is used by the utility to import objects back to their original locations. • <code>security.xml</code> file - specifies the object level permissions defined for the style template • translation files - any translations, when present; for example: <code>_template_jp_jp.rtf</code>

Preparing to Use the BI Publisher Catalog Utility

The BI Publisher catalog utility is installed in the following location:

`ORACLE_HOME/clients/bipublisher`

Configuring the Environment

In the environments in which you will be running the catalog utility, perform the following:

1. Set the following environment variables:

Variable	Value
<code>path</code>	<code>(\$HOME/BIPCatalogUtil/bin \$path)</code>
<code>BIP_LIB_DIR</code>	<code>\$HOME/BIPCatalogUtil/lib</code>
<code>BIP_CLIENT_CONFIG</code>	<code>\$HOME/BIPCatalogUtil/config</code>
<code>JAVA_HOME</code>	<code>\$HOME/java/jdk1.6.0_18</code>

The following example shows setting the environment variables for C-shell:

```
% set path = ($HOME/BIPCatalogUtil/bin $path)
% setenv BIP_LIB_DIR $HOME/BIPCatalogUtil/lib
% setenv BIP_CLIENT_CONFIG $HOME/BIPCatalogUtil/config
% setenv JAVA_HOME $HOME/java/jdk1.6.0_18
```

2. Edit `xmldata-client-config.xml`. This configuration file is located under the `BIPCatalogUtil/config` directory.

Specify the BI Publisher instance URL ("`bipurl`") and the username and password of the BI Publisher instance from which you will be exporting or to which you will be importing.

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE properties SYSTEM
"http://java.sun.com/dtd/properties.dtd">
<properties>
  <comment>BIP Server Information</comment>
  <entry
key="bipurl">http://sta00xxx.us.oracle.com:14001/xmldataserver/</entry>
  <entry key="username">OPERATIONS</entry>
  <entry key="password">welcome</entry>
</properties>
```

If you do not wish to store this information in the configuration file, at the time of import/export you can also set the `bipurl`, `username`, and `password` as parameters in the command line to overwrite values defined in `xmldata-client-config.xml`.

Exporting BI Publisher Reporting Objects

Use the `export` command to export either a single reporting object or a set of BI Publisher reporting objects under a specified folder. There are two export commands:

- `-export` - use this command to export a single report object
- `-exportfolder` - use this command to export a folder and its contents

Following is a list of the supported parameters for the `-export` and `-exportfolder` commands:

Parameter	Used With	Sample	Description
<code>catalogpath</code>	<code>-export</code> <code>-exportfolder</code>	<code>/Samples/Financials/Balance+Letter.xdo</code>	The path to the object in the catalog. If there are spaces in any of the names, use the '+' sign to substitute.
<code>target</code>	<code>-export</code>	<code>/tmp/Financials/BalanceLetter</code>	The destination directory in which to place the extracted reporting objects.

Parameter	Used With	Sample	Description
basedir	-exportfolder	/home/bipub/samples	The base directory into which to place subfolders of extracted reporting objects. When present, data models will be saved to {basedir}/datamodels; reports will be saved to {basedir}/reports; style and subtemplates will be saved to {basedir}/templates.
extract	-export -exportfolder	true/false	The default is 'false', which means that the utility will export the reporting object in a zip format that contains all the related files such as '.xdo', '.rtf', '.cfg', and so on. If the value is set to 'true', the utility will export the reporting object-related files under the specified target folder.
subfolders	-exportfolder	true/false	When you specify a folder as the "catalogpath" parameter you can use this "subfolders" parameter to control whether to download all subfolder content. If you specify 'true' all reporting objects in all subfolders will be downloaded. If you specify 'false', subfolder contents will not be downloaded.
overwrite	-export -exportfolder	true/false	Specify 'true' to overwrite existing objects in the target area.

Example Export Command Lines

The following examples show how to use the utility to export the reporting objects:

Export a Single Report in Archive Format

The following example exports the reporting object in a zip format. The zip file contains all the reporting object related files such as .xdo, .rtf, .cfg, and so on. To extract a report in archived format use the ".xdoz" extension for the target. To extract a data model, use the ".xdmz" extension.

```
$ BIPCatalogUtil.sh -export
catalogpath=/Samples/Financials/Balance+Letter.xdo
target=/home/bipub/reports/BalanceLetter.xdoz extract=false
```

Export a Single Report with Files Extracted

The following example extracts the reporting object-related files to a directory named "/home/bipub/reports/BalanceLetter". Existing files will be overwritten.

```
$ BIPCatalogUtil.sh -export
catalogpath=/Samples/Financials/Balance+Letter.xdo
target=/home/bipub/reports/BalanceLetter extract=true overwrite=true
```

Export a Set of Reports to a Specified Folder

The following example extracts all the reporting objects under the "/Samples" folder and its subfolders in the catalog. Data models are saved under {basedir}/datamodels. Reports are saved into {basedir}/reports. Style and subtemplates are saved into {basedir}/templates.

```
$ BIPCatalogUtil.sh -exportfolder catalogpath=/Samples
basedir=/home/bipub/samples subfolders=true extract=true overwrite=true
```

Importing BI Publisher Reporting Objects

Use the import command to import either a single BI Publisher reporting object or a set of BI Publisher reporting objects under a specified folder. Following is the list of the supported parameters for the import command.

Parameter	Sample	Description
catalogpath	/Samples/Financials/Balance+Letter.xdo	Specify the catalog path to where you want to import the reporting object only when you want to override the default information. If you do not specify this parameter, the reporting object will be imported to the same location where it was originally exported from.

Parameter	Sample	Description
source	/tmp/Financials/BalanceLetter	The directory where the reporting object is located. Use this parameter when you are importing a single report.
basedir	/home/bipub/samples	The directory that contains multiple reports or data models to be imported. Specify this parameter when importing a set of reports or data models.
overwrite	true/false	Specify 'true' to overwrite existing objects in the target area.

Typically, you would import the reporting object to where it was originally exported from. When you export the reporting object with the utility it will generate a metafile (.meta) that contains the catalog path information. The utility will use this information to import the reporting object to the original location. However, if you want to import the objects into a different location, you can override the original catalog path location by specifying the catalogpath parameter.

Example Import Command Lines

The following examples show how to use the utility to export the reporting objects:

Import a Report to an Original Location

The following example imports a report to a catalog path saved in its metafile (.meta). Existing reports will be overwritten.

```
$ BIPCatalogUtil.sh -import source=/tmp/Financials/BalanceLetter
  overwrite=true
```

Import a Report to a New Location

The following example imports a report into a new location in the catalog.

```
$ BIPCatalogUtil.sh -import source=/home/bipub/reports/BalanceLetter
  catalogpath=/Production/Financials/Balance+Letter+Report.xdo
```

Import a Zipped Report

The following example imports a zipped reporting object to an original location in the catalog.

```
$ BIPCatalogUtil.sh -import
  source=/home/bipub/reports/BalanceLetter.xdoz overwrite=true
```


Import a set of BI Publisher Reporting Objects under a Specified Folder

The following example imports all the reports under the base directory (basedir) into the original locations in the catalog.

```
$ BIPCatalogUtil.sh -import basedir=/Users/bipub subfolders=true  
overwrite=true
```

Generating Translation Files and Checking for Translatability

The catalog utility supports the `-xliff` command to generate a translatable XLIFF file for a specific file.

The source file can be the report definition (.xdo) file, an RTF template file (.rtf), or a BI Publisher layout template file (.xpt). When the source is the .xdo file, the generated XLIFF file will include all user-entered strings from the report definition interface, for example: description, layout names, parameter names.

Parameter	Sample	Description
source	/Samples/Financials/Balance+Letter.xdo	The path to the report or template file (RTF or XPT) for which to generate the XLIFF file.
target	/home/bipub/reports/Balance+Letter/Balance+Letter.xlf	The location to save the generated .xlf document.
basedir	/home/bipub/reports/Balance+Letter/	The directory to place the generated .xlf files into.

Generate Translation File for a Report Definition File (.xdo)

The following example generates an XLIFF file for a single report definition file:

```
$ BIPCatalogUtil.sh -xliff  
source=/home/bipub/reports/Balance+Letter/Balance+Letter.xdo  
target=/home/bipub/reports/Balance+Letter/Balance+Letter.xlf
```

To save the XLIFF to a base directory:

```
$ BIPCatalogUtil.sh -xliff  
source=/home/bipub/reports/Balance/Balance+Letter.xdo  
basedir=/home/bipub/reports/Balance+Letter/
```

Generate Translation File for RTF Template

The following example generates an XLIFF file for a single RTF template file:

```
$ BIPCatalogUtil.sh -xliff
source=/home/bipub/reports/Balance+Letter/Balance+Letter+Template.rtf
target=/home/bipub/reports/Balance+Letter/Balance+Letter+Template.xlf
```

To save the XLIFF to a base directory:

```
$ BIPCatalogUtil.sh -xliff
source=/home/bipub/reports/Balance/Balance+Letter+Template.rtf
basedir=/home/bipub/reports/Balance+Letter/
```

Setting Up Print Servers


Print Server Options for BI Publisher

- CUPS on Linux
- Internet Printing Protocol (IPP) on Windows

Setting Up CUPS

The delivery manager requires Common UNIX Printing System (CUPS) to print and fax documents. This section describes how to set up CUPS for printing and faxing on RedHat Linux.

The following diagram shows the integration between BIPublisher and CUPS:

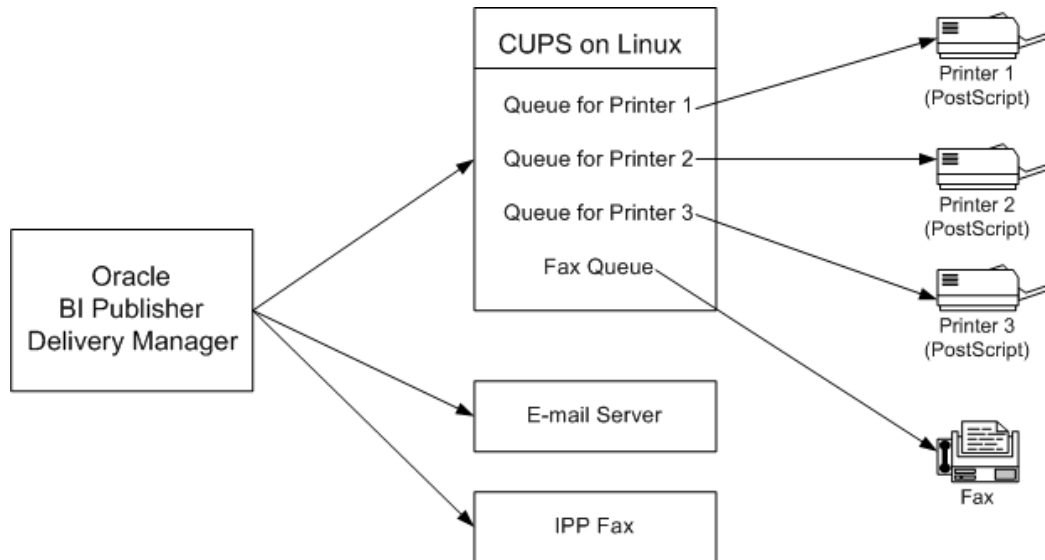

The following procedures describe how to add a printer or fax to CUPS and how to test your setup. For more information, see the *CUPS Software Administrators Manual* (<http://www.cups.org/doc-1.1/sam.html>) and the Redhat Advanced Server online help.

Prerequisites

- RedHat Advanced Server 3.0 or later
- Fax Modem connected to the Linux box
- Development Tools for the RedHat Advanced Server installed
- CUPS (Installed by default when installing RedHat AS 3.0 or later)

Setting Up a Printer on CUPS

The RedHat Advanced Server provides a configuration wizard to help you set up your printers. The RedHat process is summarized below:

Using the RedHat Printer Configuration Wizard:

1. Run "redhat-config-printer"
While logged on as the root user, open a terminal and execute "redhat-config-printer". This invokes the **Printer configuration** window.
2. Select the **New** tab to launch the **Add a new print queue** wizard.
3. Follow the wizard prompts to:

- Enter a queue name.
 - Select the queue type.
Select "Networked_JetDirect" to set up a network printer. For this selection, you must also enter the following:
 - Printer - enter a hostname or IP address.
 - Port - enter a port.

If the printer driver is installed in Microsoft Windows, the Printer and Port information is available from the Properties dialog for the printer (Settings > Printers and Faxes > (select printer) > File > Properties).
 - Select the printer model.
If your printer supports PostScript, select the following:
 - Manufacturer: "Generic"
 - Model: "PostScript Printer"
 - Review your selections and select "Apply" to create your new print queue.
4. Your new queue now displays in the Printer configuration window.

Test Your Printer on CUPS:

1. Launch a browser on RedHat and enter the following URL:
`http://localhost:631`
2. Select the **Printers** tab. The printer you just created will be listed.
To use your Windows browser to access this page, see Making CUPS Accessible from Other Machines, page A-5.
3. Select **Print Test Page** to test your printer setup. If the test page does not print, repeat the configuration steps. Ensure that your printer type and model selections are correct.

Installing and Setting Up Fax for CUPS

This section describes how to install efax-0.9 software and configure it for CUPS.

Install the Fax Software:

1. Download efax-0.9 from one of the following locations:

- <http://www.cce.com/efax/download/>
 - <ftp://ftp.metalab.unc.edu/pub/Linux/apps/serialcomm/fax/efax-0.9.tar.gz>
2. Extract the files to a working directory using the following commands:
 - `gunzip efax-0.9.tar.gz`
 - `tar xvf efax-0.9.tar`
 3. Compile and install using the following commands (refer to the Readme for more information):
 - `make`
 - `make install`

Note: You must have `make` and `gcc` installed in your RedHat AS.

4. Test the fax.

Enter the following command:

```
fax send <fax_number><tiff file>
```

For example:

```
fax send 1234567 test.tiff
```

The fax is successful if you get the return code:

```
done, returning 0 (success)
```

5. Download fax4CUPS. It is available from the following site:
 - <http://www.gnu.org/directory/productivity/special/fax4CUPS.html>
6. Install fax4CUPS as follows:
 - Extract the tar file to a temporary directory
 - Change the directory: `cd fax4CUPS-1.23`
 - Open the `INSTALL` file and follow all steps.
7. Restart CUPS using the following command:

```
/etc/rc.d/init.d/cups restart
```

Setting Up a Fax on CUPS:

1. Launch a browser and go to the following URL: `http://localhost:631/admin`
2. Enter the admin username and password in the dialog that launches.
3. From the **Admin** page, select **Add Printer**.
4. Add a Fax queue as follows:

In the **Add New Printer** region, enter the following fields:

- Name - enter a meaningful name for the, such as "efaxserver". This will be referred to as "ipp://serverName:631/printers/efaxserver".
 - Location - optional.
 - Description - optional.
5. Select a device for the fax queue.
Select "Faxmodem (efax on /dev/modem)". In some cases, "/dev/ttySxx" will be shown instead.
 6. Select a model for the fax queue.
Select "efax". You can also select either "HylaFAX" or "mgetty-fax" if these have been installed.
 7. Select the driver for the fax queue.
Select "efax (en)".
 8. Verify that the new fax queue appears on the CUPS Admin Web page.
 9. Text the fax on CUPS.

Enter the following command to test the fax:

```
/usr/bin/lp -d <printer name> -t <phone#> test.pdf
```

Example:

```
/usr/bin/lp -d efax1 -t 5556231 myfax.pdf
```

Making CUPS Accessible from Other Machines

By default, CUPS does not allow access from other network machines. However, it can be configured to allow access, as follows:

1. Open a CUPS configuration file using the following command:

```
Open /etc/cups/cupsd.conf
```

2. Add a "Listen" instruction.
 - Scroll to the bottom of the configuration file where the other Listen instructions are declared.
 - Copy "Listen 127.0.0.1:631" and paste it above or below the original.
 - Replace "127.0.0.1" with the Linux server's IP address.
3. Configure each printer.
 - In the configuration file, locate:
`<Location /printers/your_printer_queue>`
 - Comment the instruction "Deny From All".
Example:
`# Deny From All`
 - Change "Allow from 127.0.0.1" to "Allow from All"
 - Repeat for all printer or fax queues that you want to make accessible.
4. Save the configuration file and restart CUPS.
 - Use the following command to stop CUPS:
`/etc/rc.d/init.d/cups stop`
 - Use the following command to start CUPS:
`/etc/rc.d/init.d/cups start`
5. Test the accessibility from other machines.

Launch a browser from another machine and enter one of the following URLs to ensure that the CUPS web page can be accessed:


 - `http://linux_server_name:631`
 - `http://linux_ip_address:631`

Setting UP Internet Printing Protocol (IPP) on Windows


This section describes how to set up Internet Printing Protocol (IPP) on a Windows XP server.

Setting Up IPP Printers on Windows XP Professional


1. Install Internet Information Services (IIS).
 - Open the Control Panel. Select **Add or Remove Programs**, then **Add/Remove Windows Components**.
 - Select the check box for Internet Information Services (IIS) from the list of available Windows Components (shown in the following figure).

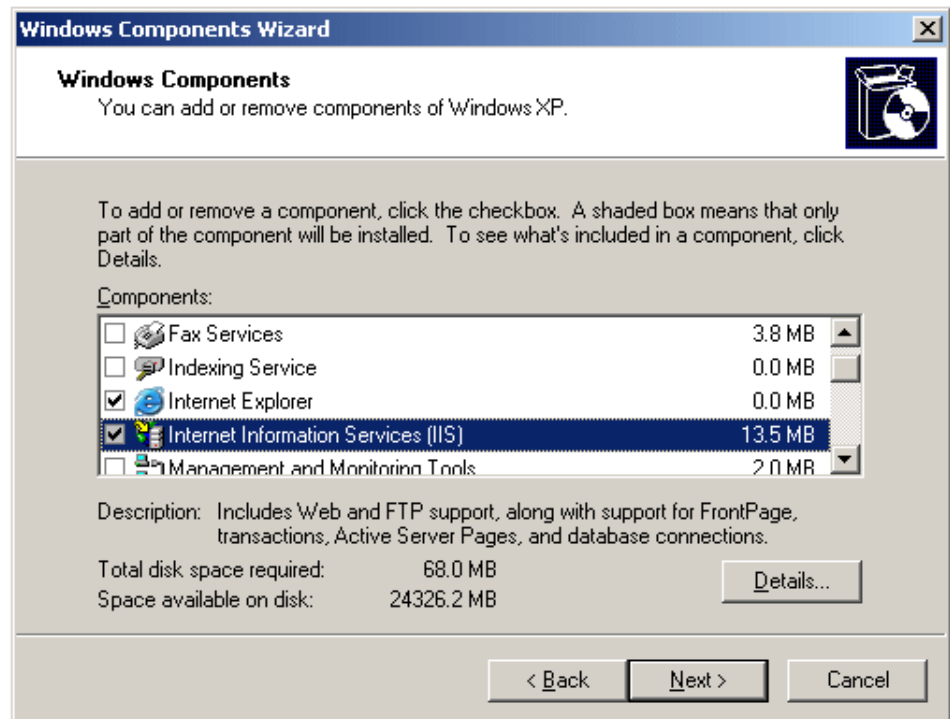


- With IIS highlighted, select **Details**. Ensure that **World Wide Web Service** is selected (shown in the following figure).

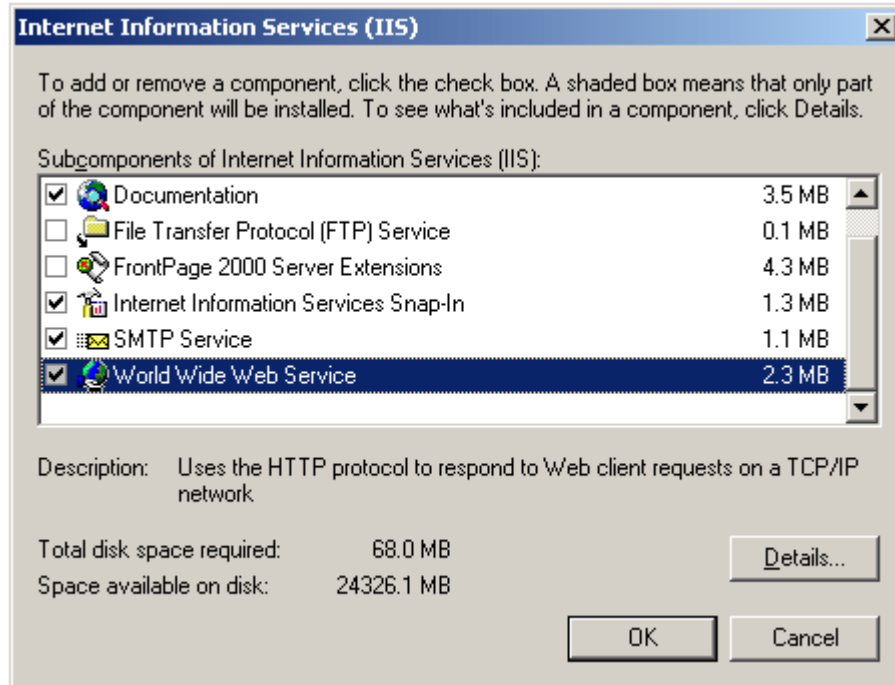

- With **World Wide Web Service** highlighted, select **Details**. Ensure that **Printers virtual directory** is selected (shown in the following figure).

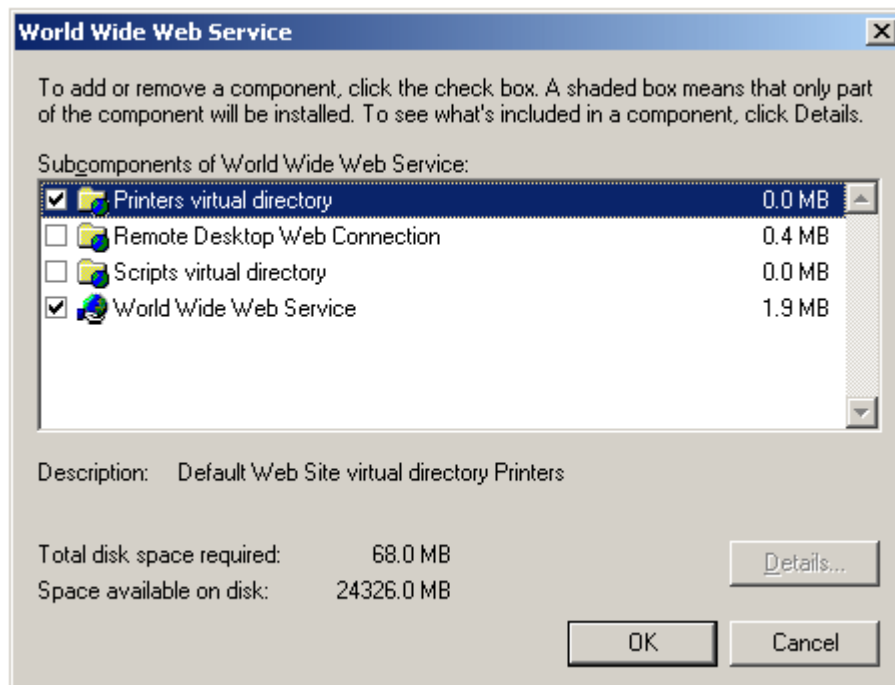


2. Restart Windows XP.
3. Share the printers.
 - From the **Start** menu, select **Settings**, then **Printers and Faxes**.
 - Right-click the printer icon and select **Sharing**.
 - In the printer **Properties** dialog, select **Share this printer** and assign a **Share name** (for example: myprinter1). An example is shown in the following figure.

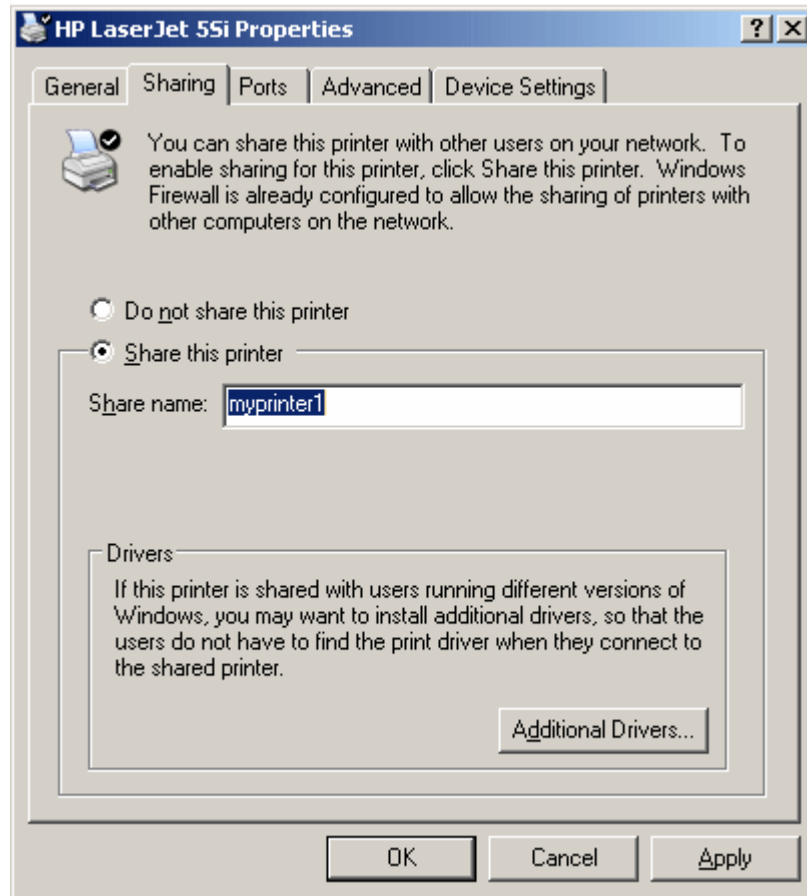

4. Configure the Windows Firewall to open a port to your XMLP Server:
 - From the **Start** menu, select **Settings**, then **Control Panel**.
 - From the **Control Panel**, select **Windows Firewall**.
 - From the **Windows Firewall** dialog, select the **Exceptions** tab.
 - Create an entry in the list of Programs and Services as follows:

1. Select **Add Port**.
2. Enter the **Name**: for example, Web
Enter the **Port number**: for example, 80
Select **TCP**.


An example is shown in the following figure:

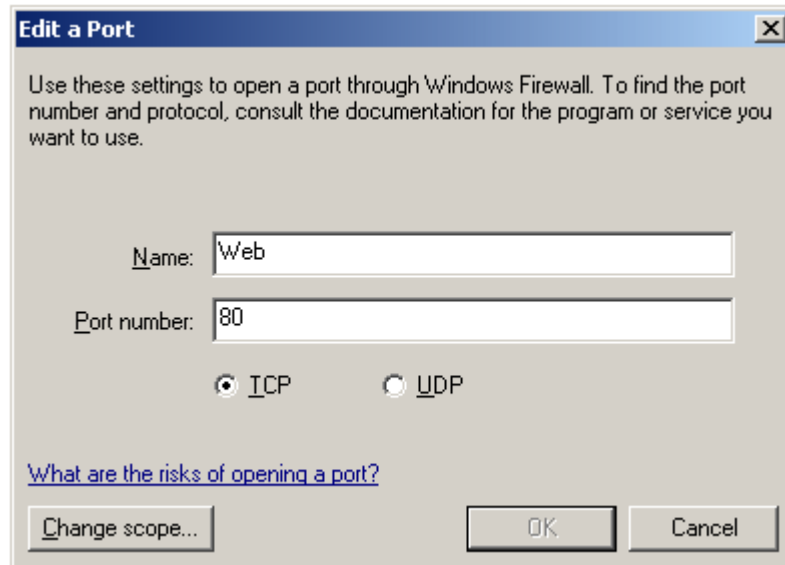


- To allow access from a specific IP address only:
 1. Select your entry, then select **Edit**.
 2. From the **Edit a Program** dialog, select **Change Scope**.
 3. Choose **Custom list**, and enter the IP address of the XMLP Server.

Note that if you use the HTTP proxy server in BI Publisher Server, you must enter the IP address of the proxy server.

An example is shown in the following figure.

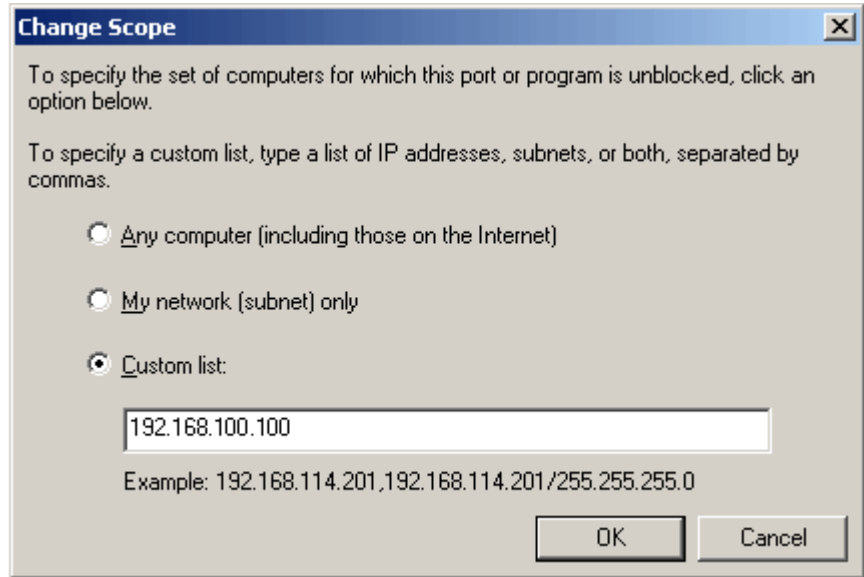

5. Change the virtual directory security setting.
 - From the **Control Panel**, select **Administrative Tools**, then **Internet Information Service**.
 - Navigate the Internet Information Service directory hierarchy as follows: Internet Information Services > [your server name] > Web Sites > Default Web Site > Printers. Right-click **Printers** and choose **Properties**.
 - From the **Printers Properties** dialog, select the **Directory Security** tab.
 - In the **Anonymous access and authentication control** region, select **Edit**.
 - In the **Authentication Methods** dialog, select the **Anonymous access** check box. An example is shown in the following figure.

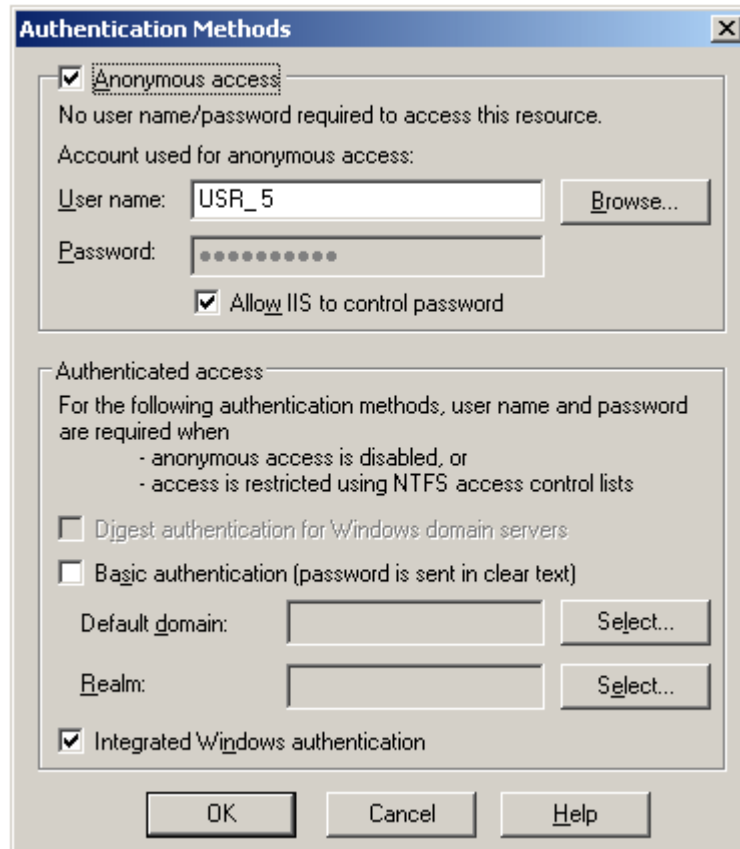

6. Open a browser in a remote machine and enter the following URL: `http://<your server name>/printers`

You will see the list of shared printers.

Scheduler Configuration Reference

This appendix covers the following topics:

- Introduction
- Configuring BI Publisher for ActiveMQ
- Manually Configuring the Quartz Scheduler

Introduction

The Oracle Business Intelligence Platform Installer configures the connection to the scheduler and installs the scheduler schema to your selected scheduler database. The WebLogic JMS queues are set up and the scheduler is up and running after installation is complete and the servers have been started.

This information in this appendix is provided for reference for manually configuring the scheduler and for setting up ActiveMQ as an alternative JMS provider.

For conceptual information about the scheduler, information for installing and configuring additional managed servers, and a description of the scheduler diagnostics page, see *Configuring the Scheduler*, page 7-1.

Configuring BI Publisher for ActiveMQ

The scheduler is configured by default to use WebLogic JMS. The scheduler also supports ActiveMQ as an alternative JMS provider. Use these guidelines in conjunction with the ActiveMQ documentation to configure BI Publisher if you choose to use ActiveMQ as the JMS provider.

Install ActiveMQ

It is recommended that you install ActiveMQ version 5.2.0 or later. This can be installed in Windows, Unix or Linux. Follow the installation steps documented at <http://activemq.apache.org/>

Register ActiveMQ as a JNDI Service

When you start ActiveMQ, the queues can be accessed using JNDI service.

The default URL to access this service is:

failover://tcp://localhost:61616

To change this configuration, update the `activemq.xml` configuration file found in `apache-activemq-x.x.x\conf` for example: `apache-activemq-5.2.0\conf`.

Update the BI Publisher Scheduler Configuration Page

Perform the following:

1. On the BI Publisher Administration page, under **System Maintenance**, click **Scheduler Configuration**.
2. Under the JMS Configuration region, select ActiveMQ.
3. Enter the ActiveMQ JNDI URL. For example: `failover://tcp://localhost:61616`
4. Enter the threads per processor (for example: 5).
5. Enter the path to a shared temporary directory.
6. Click **Test JMS** to test the connection.
7. Click **Apply** to apply the changes to this page.

The ActiveMQ URL is dynamically applied. The queues and topics are automatically created in ActiveMQ and are ready for scheduling. You can confirm the queues by checking them in the Scheduler Diagnostics page. Alternatively, you can check the status in the ActiveMQ Web console: `http://localhost:8161/admin`.

Manually Configuring the Quartz Scheduler

BI Publisher includes the Hyperion-branded DataDirect Connect for JDBC drivers to setup a connection to install and use the scheduler tables in your database. These drivers can be used as an alternative to the native JDBC drivers provided by your database vendor. When you choose a database for which a DataDirect driver is available, BI Publisher automatically enters the database driver class information in the setup screen for you. There is no additional setup required for the driver files.

If you choose to use a data direct driver not provided by the BI Platform Installer, you must download, install, and configure the driver manually.

Recommendations for Using DataDirect Connect or Native Database Drivers

DataDirect Connect for JDBC drivers are provided for the following databases:

- IBM DB2 v8.1, v9.1
- Microsoft SQL Server 2000, 2005
- Sybase Adaptive Server Enterprise
- Oracle 9i, Oracle 10g, Oracle 11g,

Note: Some database options listed here and in the Scheduler page may not be supported in this release. See System Requirements and Certification, page xii for the most up-to-date information on supported hardware and software.

The following table displays the driver recommendations for the supported scheduler databases:

Database	Native JDBC Driver	DataDirect JDBC Driver
Oracle 10g, Oracle 11g	Recommended	Supported
IBM DB2 v8.1, v9.1	Supported	Recommended
Microsoft SQL Server 2000, 2005	Supported	Recommended
Sybase Adaptive Server Enterprise	Supported	Recommended
MySQL 4.1.10a-NT, 5.0	Supported	Not Supplied

Set Up a User on Your Scheduler Database

To set up the connection to your scheduler database, you must ensure you have created a user on your selected database. BI Publisher will use this user to connect to the database. Depending on your database type, this user may require specific privileges. These are detailed in the database-specific sections below.

Entering Connection Information for Your Scheduler Database and Installing the Schema

Following are the general steps for setting up the Scheduler database. Please also refer to the subsequent section that is specific to your database.

1. Log in to BI Publisher with Administrator credentials and select the **Administration** tab.
2. Under **System Maintenance**, click **Scheduler Configuration**.
3. In the **Scheduler Selection** region, select Quartz.

Note: The option "Enterprise Scheduler Services" is reserved for a future release.

4. Enter the following fields for the Database Connection:
 - **Database Type** - select your database from the list. After you make a selection, the Database Driver Class field will automatically update with the recommended driver class.
 - **Connection String** - enter the connection string for your selected database. Sample strings are provided in the database-specific sections that follow.
 - **Username** and **Password** - enter the scheduler user you set up for your database. The user must have permissions to connect to the database and create tables. Other permissions may be required depending on your database type. Please see the appropriate database-specific section below.
 - **Database Driver Class** - when you select the database type this field is automatically updated with the recommended driver. If you wish to use another driver, specify it in this field.

Note: The Oracle database drivers and the DataDirect drivers are installed with BI Publisher and no further setup is required. Note that for other databases, even though the recommended native drivers are automatically populated in this field, additional setup is required to make the drivers available to BI Publisher.

5. Click **Test Connection** to ensure that BI Publisher can connect to the database. If the connection fails, ensure that you have entered the fields as shown and set up your database appropriately.

6. Click **Install Schema** to install the BI Publisher scheduler schema to your database.

Entering Connection Information for an Oracle Database

Prerequisite: Ensure that the database user you enter has "connect" or "create session" and "create table" privileges and that the user has been assigned a quota (otherwise the quota will be 0).

For example, the following sample creates the user "bipuser":

```
SQL> CREATE USER bipuser
      2 IDENTIFIED BY welcome
      3 DEFAULT TABLESPACE USERS
      4 TEMPORARY TABLESPACE TEMP
      5 QUOTA 20G ON USERS
      6 QUOTA 1M ON TEMP;
```

User created.

```
SQL> GRANT CREATE SESSION TO bipuser; -- or "GRANT CONNECT TO bipuser;"
```

Grant succeeded.

```
SQL> grant create table to bipuser;
```

Grant succeeded.

Enter the following to use the Oracle native driver to connect to your Oracle database:

Field	Entry
Database Type:	Select Oracle 11g or Oracle 10g from the list.
Connection String:	Enter the following connection string parameters: jdbc:oracle:thin:@<hostname>:<port>:<oracle SID> For example: jdbc:oracle:thin:@mydatabaseserver.com:1521: bipscheduler
Database Driver Class:	oracle.jdbc.driver.OracleDriver

Entering Connection Information for IBM DB2

Prerequisite: Ensure that the user that you enter to configure the scheduler has been set up with a 32 K page size tablespace. If not, create the table and assign it to the user. The user must also have "Connect to database" and "Create tables" privileges.

Enter the following to use the DataDirect driver to connect to an IBM DB2 v8 or IBM

DB2 v9 database:

Field	Entry
Database Type:	Select IBM DB2 v9 or IBM DB2 v8 from the list.
Connection String:	Enter the following connection string parameters: <code>jdbc:hyperion:db2://<hostname>:<port>;DatabaseName=<DATABASENAME></code> For example: <code>jdbc:hyperion:db2:// mydatabaseserver.com:1433;DatabaseName=bipscheduler</code>
Database Driver Class:	<code>hyperion.jdbc.db2.DB2Driver</code>

Entering Connection Information for Microsoft SQL Server

Prerequisite: Ensure that your Microsoft SQL Server is set up with mixed mode authentication. Also ensure that the user you enter to configure the scheduler has the "db_owner" role.

Enter the following to use the DataDirect driver to connect to a Microsoft SQL Server 2000 or 2005 database:

Field	Entry
Database Type:	Select Microsoft SQL Server 2000 or Microsoft SQL Server 2005 from the list.
Connection String:	Enter the following connection string parameters: <code>jdbc:hyperion:sqlserver://<hostname>:<port>;DatabaseName=<DATABASENAME></code> For example: <code>jdbc:hyperion:sqlserver:// mydatabaseserver.com:1433;DatabaseName=bipscheduler</code>
Database Driver Class:	<code>hyperion.jdbc.sqlserver.SQLServerDriver</code>

Entering Connection Information for a Sybase Adaptive Server Enterprise Database

Prerequisite: Ensure that you set the "ddl in tran" mode to true in the database. Consult the Sybase documentation or contact your database administrator for instruction how to enable this option.

Enter the following to use the DataDirect driver to connect to your Sybase Adaptive Server Enterprise database:

Field	Entry
Database Type:	Select Sybase Adaptive Server Enterprise from the list.
Connection String:	Enter the following connection string parameters: <code>jdbc:hyperion:sybase://<hostname>:<port>;DatabaseName=<DATABASENAME></code> For example: <code>jdbc:hyperion:sybase://mydatabaseserver.com:4100;DatabaseName=bipscheduler</code>
Database Driver Class:	<code>hyperion.jdbc.sybase.SybaseDriver</code>

Integration Reference for Oracle Business Intelligence Enterprise Edition

This appendix covers the following topics:

- About Integration
- Configuring BI Publisher to Use the Oracle BI Presentation Catalog
- Configuring Integration with Oracle BI Presentation Services
- Setting Up a JDBC Connection to the Oracle BI Server

About Integration

The information in this chapter is for reference to highlight the integration points between BI Publisher and the Oracle BI Enterprise Edition.

You may need to reference this information in the following scenarios:

- You are upgrading from a 10g release to the 11g release
- You are running a separate installation of BI Publisher and wish to integrate it
- You need to modify the installed configuration

The points of integration discussed in this chapter are:

- Connecting to Oracle BI Server as a data source
- Configuring BI Publisher to use the Oracle BI Presentation Catalog
- Configuring integration with Oracle BI Presentation Services

Prerequisites

Oracle BI Publisher must be installed on the same server with the other components of

Oracle BI Enterprise Edition.

The security configuration must be either Oracle Fusion Middleware security or Oracle BI Server security.

Configuring BI Publisher to Use the Oracle BI Presentation Catalog

To manually configure BI Publisher to use the Oracle BI Presentation Catalog, perform the following:

1. On the **Server Configuration** page in the **Catalog** region, select **Catalog Type:** Oracle BI EE Catalog
2. Enter the following:
 - **Server Version** - v6
 - **System Username**
Enter BISystemUser

BISystemUser is a fixed user created during installation for trusted communication between components.
 - **System Password**
Enter the password for BISystemUser.
 - **Connection Protocol** - TCP
3. Click **Test Connection** to ensure BI Publisher can connect to Oracle BI Presentation Services.
4. Enter the path of the current **BI Publisher repository**.
5. Click **Upload to BI Presentation Catalog**. This will upload the contents of your BI Publisher catalog to the BI Presentation catalog.
6. Restart the BI Publisher application.

Configuring Integration with Oracle BI Presentation Services

When you install Oracle BI Enterprise Edition the integration with BI Publisher is automatically configured. This means that the Oracle BI Platform installer sets the Presentation Services hostname, port, and URL suffix values. Furthermore, the username and password fields will be hidden because both products will be configured to use Oracle Fusion Middleware security.

1. From the Administration page, under **Integration**, click **Oracle BI Presentation Services**.
2. Enter the following information about your BI Presentation Services server:
 - Server Protocol - select http or https
 - Server Version - select v6
 - Server - enter the server host name. For example: `BIEEServer`
 - Port for the server where the BI Presentation Services plug-in is running. For example: 9704
 - Administrator Username and Password - these fields will be hidden when using Oracle Fusion Middleware Security. If you are manually configuring the integration, enter the `BISystemUser` username and password.
 - URL Suffix - default value is: `analytics/saw.dll`

Note: If your deployment is configured for SSO, the suffix must be entered as "analytics-ws/saw.dll" to allow the Web services between BI Publisher and BI Presentation Services. For more information on configuring SSO for Oracle BI Enterprise Edition, see *Oracle Fusion Middleware Security Guide for Oracle Business Intelligence Enterprise Edition*.
 - Session time out in minutes

Setting Up a JDBC Connection to the Oracle BI Server

Note: If you installed BI Publisher with the Oracle BI Enterprise Edition, this data source will be automatically configured.

To add the Oracle BI Enterprise Edition server as a JDBC data source, follow the guidelines in Adding a JDBC Data Source, page 9-5 in conjunction with these specific guidelines.

You must use the `BISystemUser` user name and password for connection to the BI Server.

Note that if your Oracle BI Server is SSL-enabled, you must copy the keystore to the BI Publisher server and provide it in the connection string.

The entries for Database Driver Class and Connection String must be as follows:

Database Driver Class: oracle.bi.jdbc.AnaJdbcDriver

Connection String: The appropriate connection string depends on your specific deployment. Clustered and SSL-enabled deployments require specific parameters to construct the URL. For example, if your Oracle BI Server is SSL-enabled, you must copy the keystore to the BI Publisher server and provide it in the connection string. For more information on SSL, see the *Oracle Fusion Middleware Security Guide for Business Intelligence*.

The URL for the connection string requires the following format:

```
<URL>:= <Prefix>: [//<Host>:<Port>/][<Property Name>=<Property Value>;]*
```

where

<Prefix>: is the string jdbc:oraclebi

<Host>: is the hostname of the analytics server. It can be an IP Address or hostname. The default is localhost.

<Port> is the port number that the server is listening on. The default is 9703.

```
<Property Name>:=  
<Catalog>|<User>|<Password>|<SSL>|<SSLKeyStoreFileName>  
|<SSLKeyStorePassword>|<TrustAnyServer>|<TrustStoreFileName>  
>|<TrustStorePassword>|<LogLevel>|<LogFilePath>|<PrimaryCCS>|<PrimaryCCS  
Port>| <SecondaryCCS>|<SecondaryCCSPort>
```

Valid property values are:

<Catalog> - can be any catalog name that is available on the server. If the catalog is not specified, then it will default to the default catalog specified by the server. If the catalog name is not found in the server, it will still use the default catalog and issue a warning during connect.

<User> - specifies the username for the BI Server. The default is "Administrator".

<Password>- specifies the password for the BI Server for the username. The password will be encrypted using 3DES.

<SSL>True|False - default is False. Specifies if the JDBC driver will use SSL or not. If true, the driver will check if SSLKeyStoreFileName is readable; if not, it will issue an error message.

<SSLKeyStoreFileName> - the name of the file that store the SSL Keys. This file must exist in the local file system and be readable by the driver.

<SSLKeyStorePassword> - the password to open the file pointed to by SSLKeyStoreFileName.

<TrustAnyServer> - True | False - the default is False. If SSL is set to "True" the property specifies whether to check the trust store for the server. If TrustAnyServer is set to "False", the driver will verify that TrustStoreFileName is readable.

<TrustStoreFileName> - if TrustAnyServer is set to false, this property is required to specify the trust store file name.

<TrustStorePassword> - if TrustAnyServer and TrustStoreFileName are specified, this property specifies the password to open up the file specified by TrustStoreFileName.

<LogLevel> - specify the log level. Valid values are

SEVERE | WARNING | INFO | CONFIG | FINE | FINER | FINEST

<LogFilePath> - specifies the file path of the desired logging destination. Default is %TEMP% on windows, \$TMP on UNIX. Driver needs to have write permission on the file. It will create a new entry marked as _0, _1 if the same file name already exists.

<PrimaryCCS> -(For clustered configurations) specifies the primary CCS machine name instead of using the "host" to connect. If this property is specified, the "host" property value is ignored. The jdbc driver will try to connect to the CCS to obtain the load-balanced machine. Default is localhost.

<PrimaryCCSPort> - specifies the primary CCS port number running on the PrimaryCCS machine. Default is 9706.

<SecondaryCCS> - specifies the secondary CCS machine name instead of using the "host" to connect. If this property is specified, then the jdbc driver will try to connect to the CCS to obtain the load-balanced machine. Default is localhost.

<SecondaryCCSPort> - specifies the secondary CCS port number running on the secondary machine. Default is 9706.

Following is an example connection string for a clustered deployment with SSL enabled:

```
jdbc:oraclebi://machine01.domain:9706/PrimaryCCS=machine01;PrimaryCCSPort=9706;SecondaryCCS=machine02;SecondaryCCSPort=9706;user=admin;password=welcome;ssl=true;sslKeystorefilename=c:\mycompany\OracleBI\ssl\javahost.keystore;sslKeystorepassword=welcome;trustanyserver=true;
```

Use Proxy Authentication - (Required) select this box. Proxy authentication is required.

Configuration File Reference

This appendix covers the following topics:

- BI Publisher Configuration Files
- Setting Properties in the Runtime Configuration File
- Structure
- Properties
- Font Definitions
- Predefined Fonts

BI Publisher Configuration Files

This chapter contains reference information about the following BI Publisher configuration file:

- Runtime Configuration Properties File

The properties in the Runtime Configuration file are set through the Runtime Configuration Properties, Currency Formats, and Font Mappings pages (see Setting Runtime Properties, page 12-1).

Setting Properties in the Runtime Configuration File

The runtime properties and font mappings are set through the Runtime Configuration Properties page and the Font Mappings page in the Administration interface.

If you do not use the Administration page to set the properties, BI Publisher will fall back to the properties set in this file.

It is important to note that the Administration interface does not update this file. Any settings in the Administration pages will take precedence over the settings in the xdo.cfg file.

File Name and Location

The configuration file is named `xdo.cfg`.

The file is located under the `<BI Publisher Repository>/Admin/Configuration`.

Namespace

The namespace for this configuration file is:

`http://xmlns.oracle.com/oxp/config/`

Configuration File Example

Following is a sample configuration file:

```
<config version="1.0.0"
  xmlns="http://xmlns.oracle.com/oxp/config/"><!-- Properties -->
<properties>
  <!-- System level properties -->
  <property name="system-temp-dir"/>/tmp</property>

  <!-- PDF compression -->
  <property name="pdf-compression">true</property>

  <!-- PDF Security -->
  <property name="pdf-security">true</property>
  <property name="pdf-open-password">user</property>
  <property name="pdf-permissions-password">owner</property>
  <property name="pdf-no-printing">true</property>
  <property name="pdf-no-changing-the-document">true</property>
</properties>

<!-- Font setting -->
<font>
  <!-- Font setting (for FO to PDF etc...) -->
  <font family="Arial" style="normal" weight="normal">
    <truetype path="/fonts/Arial.ttf" />
  </font>
  <font family="Default" style="normal" weight="normal">
    <truetype path="/fonts/ALBANWTJ.ttf" />
  </font>

  <!--Font substitute setting (for PDFForm filling etc...) -->
  <font-substitute name="MSGothic">
    <truetype path="/fonts/msgothic.ttc" ttcno="0" />
  </font-substitute>
</font>
</config>
```

How to Read the Element Specifications

The following is an example of an element specification:

```

<Element Name Attribute1="value"
      Attribute2="value"
      AttributeN="value"
      <Subelement Name1/>[occurrence-spec]
      <Subelement Name2>...</Subelement Name2>
      <Subelement NameN>...</Subelement NameN>
</Element Name>

```

The [occurrence-spec] describes the cardinality of the element, and corresponds to the following set of patterns:

- [0..1] - indicates the element is optional, and may occur only once.
- [0..n] - indicates the element is optional, and may occur multiple times.

Structure

The <config> element is the root element. It has the following structure:

```

<config version="cdata" xmlns="http://xmlns.oracle.com/oxp/config/">
  <font> ... </font> [0..n]
  <property> ... </property> [0..n]
</config>

```

Attributes

version	The version number of the configuration file format. Specify 1.0.0.
xmlns	The namespace for BI Publisher's configuration file. Must be <code>http://xmlns.oracle.com/oxp/config/</code>

Description

The root element of the configuration file. The configuration file consists of two parts:

- Properties (<property> elements)
- Font definitions (elements)

The and <property> elements can appear multiple times. If conflicting definitions are set up, the last occurrence prevails.

Properties

This section describes the <properties> element and the <property> element.

The <properties> element

The properties element is structured as follows:

```
<properties locales="cdata">
  <property>...
  </property> [0..n]
</properties>
```

Description

The `<properties>` element defines a set of properties. You can specify the `locales` attribute to define locale-specific properties. Following is an example:

Example

```
<!-- Properties for all locales -->
<properties>...Property definitions here...
</properties>

<!--Korean specific properties-->
<properties locales="ko-KR">
  ...Korean-specific property definitions here...
</properties>
```

The `<property>` element

The `<property>` element has the following structure:

```
<property name="cdata"> ...pdata...
</property>
```

Attributes

name	Specify the property name.
-------------	----------------------------

Description

Property is a name-value pair. Specify the internal property name (key) to the name attribute and the value to the element value. The internal property names used in the configuration file are listed in the property descriptions in the Setting Runtime Properties, page 12-1 chapter.

Example

```
<properties>
  <property name="system-temp-dir">d:\tmp</property>
  <property name="system-cache-page-size">50</property>
  <property name="pdf-replace-smart-quotes">>false</property>
</properties>
```

Font Definitions

Font definitions include the following elements:

- ``
- `<font-substitute>`

- `<truetype>`
- `<type1>`

For the list of Truetype and Type1 fonts, see Predefined Fonts, page D-7.

 element

The `` element is structured as follows:

```
<font locales="cdata">
  <font> ... </font> [0..n]
  <font-substitute> ... </font-substitute> [0..n]
</font>
```

Attributes

locales Specify the locales for this font definition. This attribute is optional.

Description

The `` element defines a set of fonts. Specify the `locales` attribute to define locale-specific fonts.

Example

```
<!-- Font definitions for all locales -->
<font>
  ..Font definitions here...
</font>

<!-- Korean-specific font definitions -->
<font locales="ko-KR">
  ... Korean Font definitions here...
</font>
```

 element

Following is the structure of the `` element:

```
<font family="cdata" style="normalitalic"
weight="normalbold">
  <truetype>...</truetype>
or <type1> ... <type1>
</font>
```

Attributes

family Specify any family name for the font. If you specify "Default" for this attribute, you can define a default fallback font. The **family** attribute is case-insensitive.

style Specify "normal" or "italic" for the font style.

weight Specify "normal" or "bold" for the font weight.

Description

Defines a BI Publisher font. This element is primarily used to define fonts for FO-to-PDF processing (RTF to PDF). The PDF Form Processor (used for PDF templates) does not refer to this element.

Example

```
<!-- Define "Arial" font -->
<font family="Arial" style="normal" weight="normal">
  <truetype path="/fonts/Arial.ttf"/>
</font>
```

<font-substitute> element

Following is the structure of the font-substitute element:

```
<font-substitute name="cdata">
  <truetype>...</truetype>
or <type1>...</type1>
</font-substitute>
```

Attributes

name Specify the name of the font to be substituted.

Description

Defines a font substitution. This element is used to define fonts for the PDF Form Processor.

Example

```
<font-substitute name="MSGothic">
  <truetype path="/fonts/msgothic.ttc" ttccno=0"/>
</font-substitute>
```

<type1> element

The form of the <type1> element is as follows:

```
<type1 name="cdata"/>
```

Attributes

name Specify one of the Adobe standard Latin1 fonts, such as "Courier".

Description

<type1> element defines an Adobe Type1 font.

Example

```
<!--Define "Helvetica" font as "Serif" -->
<font family="serif" style="normal" weight="normal">
  <type1 name="Helvetica"/>
</font>
```

Predefined Fonts

The following Type1 fonts are built-in to Adobe Acrobat and BI Publisher provides a mapping for these fonts by default. You can select any of these fonts as a target font with no additional setup required.

The Type1 fonts are listed in the following table:

Type 1 Fonts

Number	Font Family	Style	Weight	Font Name
1	serif	normal	normal	Time-Roman
1	serif	normal	bold	Times-Bold
1	serif	italic	normal	Times-Italic
1	serif	italic	bold	Times-BoldItalic
2	sans-serif	normal	normal	Helvetica
2	sans-serif	normal	bold	Helvetica-Bold
2	sans-serif	italic	normal	Helvetica-Oblique
2	sans-serif	italic	bold	Helvetica-BoldOblique
3	monospace	normal	normal	Courier
3	monospace	normal	bold	Courier-Bold
3	monospace	italic	normal	Courier-Oblique
3	monospace	italic	bold	Courier-BoldOblique
4	Courier	normal	normal	Courier

Number	Font Family	Style	Weight	Font Name
4	Courier	normal	bold	Courier-Bold
4	Courier	italic	normal	Courier-Oblique
4	Courier	italic	bold	Courier-BoldOblique
5	Helvetica	normal	normal	Helvetica
5	Helvetica	normal	bold	Helvetica-Bold
5	Helvetica	italic	normal	Helvetica-Oblique
5	Helvetica	italic	bold	Helvetica-BoldOblique
6	Times	normal	normal	Times
6	Times	normal	bold	Times-Bold
6	Times	italic	normal	Times-Italic
6	Times	italic	bold	Times-BoldItalic
7	Symbol	normal	normal	Symbol
8	ZapfDingbats	normal	normal	ZapfDingbats

The TrueType fonts are listed in the following table. All TrueType fonts will be subsetted and embedded into PDF.

Number	Font Family Name	Style	Weight	Actual Font	Actual Font Type
1	Albany WT	normal	normal	ALBANYWT.ttf	TrueType (Latin1 only)
2	Albany WT J	normal	normal	ALBANWTJ.ttf	TrueType (Japanese flavor)

Number	Font Family Name	Style	Weight	Actual Font	Actual Font Type
3	Albany WT K	normal	normal	ALBANWTK.ttf	TrueType (Korean flavor)
4	Albany WT SC	normal	normal	ALBANWTS.ttf	TrueType (Simplified Chinese flavor)
5	Albany WT TC	normal	normal	ALBANWTT.ttf	TrueType (Traditional Chinese flavor)
6	Andale Duospace WT	normal	normal	ADUO.ttf	TrueType (Latin1 only, Fixed width)
6	Andale Duospace WT	bold	bold	ADUOB.ttf	TrueType (Latin1 only, Fixed width)
7	Andale Duospace WT J	normal	normal	ADUOJ.ttf	TrueType (Japanese flavor, Fixed width)
7	Andale Duospace WT J	bold	bold	ADUOJB.ttf	TrueType (Japanese flavor, Fixed width)
8	Andale Duospace WT K	normal	normal	ADUOK.ttf	TrueType (Korean flavor, Fixed width)
8	Andale Duospace WT K	bold	bold	ADUOKB.ttf	TrueType (Korean flavor, Fixed width)
9	Andale Duospace WT SC	normal	normal	ADUOSC.ttf	TrueType (Simplified Chinese flavor, Fixed width)

Number	Font Family Name	Style	Weight	Actual Font	Actual Font Type
9	Andale Duospace WT SC	bold	bold	ADUOSCB.ttf	TrueType (Simplified Chinese flavor, Fixed width)
10	Andale Duospace WT TC	normal	normal	ADUOTC.ttf	TrueType (Traditional Chinese flavor, Fixed width)
10	Andale Duospace WT TC	bold	bold	ADUOTCB.ttf	TrueType (Traditional Chinese flavor, Fixed width)

Included Barcode Fonts

BI Publisher also includes the following barcode fonts:

Font File	Supported Algorithm
128R00.TTF	code128a, code128b, and code128c
B39R00.TTF	code39, code39mod43
UPCR00.TTF	upca, upce

For information on using barcode fonts in an RTF template, see *Using the Barcodes Shipped with BI Publisher, Oracle Fusion Middleware Report Designer's Guide for Oracle Business Intelligence Publisher*.

Index

A

Active Directory, 3-21

ActiveMQ
for scheduler, B-1

Answers
setting up integration with, 10-1

auditing
setting audit policies, 13-12
user, 13-10
users, 13-9

audit log
viewing, 13-15

C

cache
server settings, 8-5
system, expiration, 8-5
system, maximum cached report definitions,
8-6
system, size limit, 8-5

catalog
configuring, 8-2
exporting objects, 15-5
importing objects, 15-7
Oracle BI Publisher , 8-2
translation, 14-2

catalog permissions, 3-5

catalog utility, 15-1
using, 15-4

clustering support
scheduler, 7-4

configuration
manual, D-1
setting runtime properties, 12-1

configuration file
<properties> element, D-3
<root> element, D-3
structure, D-3

Configuration folder
setting path to, 8-1

configuration properties
precedence of levels, 12-1

CUPS setup, A-1

currency formats
defining at system-level, 12-24

D

data access, 3-7

database
backup data source, 9-3
database fetch size, 8-5

Datadirect drivers
for scheduler, B-3

data source
access, 3-7

data sources
setting up, 9-1
supported, 9-1
viewing and updating, 9-11

diagnostic logging, 13-2

diagnostics
scheduler, 7-12

digital signature

setting properties, 12-7
support for, 6-1

E

E-Business Suite
 security integration, 5-4
e-mail default settings, 11-1
e-mail server
 configuring, 11-4
export objects from catalog, 15-5

F

failover
 scheduler jobs, 7-4
 setting retry properties, 8-6
fax server
 configuring, 11-3
font definitions
 configuration file, D-4
fonts
 mapping, 12-19
FTP server
 configuring, 11-6

G

Ghostscript
 setting print filters, 11-4
guest user
 enabling, 4-2

H

HTML output
 controlling table widths, 12-11
HTTP server
 configuring, 11-5

I

import objects to catalog, 15-7
Internet Printing Protocol, A-6
IPP, A-6

J

JDBC
 database connection, 9-5

JDBC drivers
 for data sources, 9-5
JMS
 in scheduler architecture, 7-2
JMS providers
 supported, 7-5
JNDI
 choosing, 9-3
 setting up connection, 9-8

K

keystore, 4-
 pointing BI Publisher to, 4-4

L

LDAP
 data source connection, 9-8
 general configuration, 3-15
LDAP providers
 Microsoft Active Directory, 3-21
local superuser, 4-1
log files
 configuring, 13-4
 viewing, 13-5
logging, 13-2
 message levels, 13-2
 supported formats, 13-3
logs, 13-2
 log file rotation, 13-3

M

Mbeans
 in performance monitoring, 13-9
Microsoft Active Directory, 3-21
monitoring
 performance, 13-9
 enabling, 13-10
 users, 13-9

N

notification subjects
 setting, 11-2

O

ODL, 13-2

- OLAP, 9-
 - data source connection, 9-9
- Oracle BI EE Catalog, 8-3
- Oracle BI Presentation Catalog, 8-3
- Oracle BI Server
 - security, 5-2
 - setting as data source connection, C-3
- Oracle database
 - security integration, 5-6
- Oracle Diagnostic Logging, 13-2
- Oracle Siebel CRM
 - security integration, 5-9
- Oracle SSO, 3-27

P

- PDF output properties, 12-2
- PDF security properties, 12-3
- PDF to Postscript filter, 11-3
- performance monitoring, 13-9
 - enabling, 13-10
- permissions
 - catalog, about, 3-5
- postprocess function
 - for JDBC data source, 9-3
- predefined fonts, 12-20, D-7
- preprocess function
 - for JDBC data source, 9-3
- Presentation Services catalog
 - setting up integration with, 10-1
- printers
 - setup
 - Unix/Linux, A-1
 - Windows, A-6
- printing
 - defining custom filters, 11-4
 - PDF to Postscript filter, 11-3
- print server
 - configuring, 11-3
- properties element
 - configuration file, D-3
- proxy
 - configuring settings, 4-5
- proxy authentication, 9-2

R

- report scalable threshold, 8-5

- roles
 - BI Publisher functional, 3-3

S

- scheduler
 - Active MQ support, B-1
 - adding managed servers, 7-7
 - architecture, 7-2
 - configuring processors, 7-6
 - diagnostics, 7-12
 - manual setup reference, B-2
 - preconfiguration, 7-5
- security
 - PDF properties, 12-3
 - roles and permissions
 - concepts, 3-2
 - superuser, 4-1
- shared directory
 - scheduler, 7-6
- Siebel CRM
 - security integration, 5-9
- single sign-on
 - Oracle Access Manager, 3-25
 - Oracle SSO, 3-27
- SSL
 - configuring, 4-3
- SSL certificate file
 - defining for delivery manager, 11-1
- superuser, 4-1
- system temporary file directory, 8-4

T

- tables
 - controlling table widths in HTML output, 12-11
- temp file locations, 8-4
- temporary file directory, 8-4
- translation
 - exporting and importing XLIFF files, 14-2
 - template-based, 14-5
- translation files
 - generating with catalog utility, 15-9

U

- user auditing, 13-9, 13-10

users and roles
options for configuring, 3-3

W

WebDAV server
configuring, 11-5

X

xliff files
generating with catalog utility, 15-9

XLIFF files
exporting and importing, 14-2