

Oracle® SNMP

Support Reference Guide

Release 8.1.7

September 2000

Part No. A85249-01

Copyright © 1996, 2000, Oracle Corporation. All rights reserved.

The Programs (which include both the software and documentation) contain proprietary information of Oracle Corporation; they are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright, patent, and other intellectual and industrial property laws. Reverse engineering, disassembly, or decompilation of the Programs is prohibited.

The information contained in this document is subject to change without notice. If you find any problems in the documentation, please report them to us in writing. Oracle Corporation does not warrant that this document is error free. Except as may be expressly permitted in your license agreement for these Programs, no part of these Programs may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of Oracle Corporation.

If the Programs are delivered to the U.S. Government or anyone licensing or using the programs on behalf of the U.S. Government, the following notice is applicable:

Restricted Rights Notice Programs delivered subject to the DOD FAR Supplement are "commercial computer software" and use, duplication, and disclosure of the Programs, including documentation, shall be subject to the licensing restrictions set forth in the applicable Oracle license agreement. Otherwise, Programs delivered subject to the Federal Acquisition Regulations are "restricted computer software" and use, duplication, and disclosure of the Programs shall be subject to the restrictions in FAR 52.227-19, Commercial Computer Software - Restricted Rights (June, 1987). Oracle Corporation, 500 Oracle Parkway, Redwood City, CA 94065.

The Programs are not intended for use in any nuclear, aviation, mass transit, medical, or other inherently dangerous applications. It shall be the licensee's responsibility to take all appropriate fail-safe, backup, redundancy, and other measures to ensure the safe use of such applications if the Programs are used for such purposes, and Oracle Corporation disclaims liability for any damages caused by such use of the Programs.

Oracle® is a registered trademark, and Oracle7, Oracle8, Oracle8i, Oracle Expert, Oracle Trace, Net8, PL/SQL, SQL*, SQL*Net, and SQL*Plus are trademarks or registered trademarks of Oracle Corporation. All other company or product names mentioned are used for identification purposes only and may be trademarks of their respective owners. Windows, Windows NT, Visual C++, and OLE are trademarks of Microsoft Corporation. Netscape, Netscape Certificater Server, Netscape FastTrack Server, Netscape Navigator, Netscape ONE, SuiteSpot, and the Netscape N and Ship's Wheel logos are registered trademarks of Netscape Communications Corporation in the United States and other countries.

OraTcl - Copyright 1993 Tom Poindexter and US West Advanced Technologies, Inc. Permission to use, copy, modify, and distribute the software and its documentation for any purpose and without fee is hereby granted, provided that the copyright notice appear in all copies. Tom Poindexter and U S WEST make no representations about the suitability of this software for any purpose. It is provided as is without express or implied warranty. By use of this software the user agrees to indemnify and hold harmless Tom Poindexter and U S WEST from any claims or liability for loss arising out of such use.

Contents

Send Us Your Comments	xvii
Preface.....	xix
1 Overview of Oracle SNMP Support	
Benefits of Oracle SNMP Support	1-2
How SNMP Works	1-3
The Components of SNMP	1-3
Management Station	1-3
Management Framework	1-4
Management Application.....	1-5
Managed Node.....	1-6
Master Agent.....	1-6
Subagent.....	1-6
Oracle Enterprise Manager	1-7
Intelligent Agents	1-7
Management Information Base (MIB)	1-8
How SNMP Communications Are Performed.....	1-9
SNMP Support On Oracle	1-10
Configuring SNMP for Oracle	1-10
Configuring SNMP on Windows NT	1-10
Configuring SNMP on UNIX Platforms.....	1-12
Using only an SNMP Console	1-12
Configuring the SNMP Master Agent.....	1-12
Starting the SNMP Agents.....	1-13

Loading the Oracle MIBs.....	1-14
Configuring SNMP with Oracle Enterprise Manager and an SNMP Console.....	1-14

2 Oracle MIB Overview

Oracle Products Providing SNMP Support	2-1
Oracle Servers.....	2-1
Listener	2-2
Oracle Names	2-2
Oracle Enterprise Manager.....	2-2
MIBs Supporting These Products.....	2-2
Network Services MIB	2-2
Public RDBMS MIB	2-3
Private Oracle Database MIB	2-3
Other Oracle Private MIBs.....	2-3
Interpreting SNMP OIDs.....	2-4
Interpreting Oracle OIDs.....	2-4
Interpreting OIDs for Oracle-Implemented Public MIBs	2-5
Interpreting OIDs for Instances of Oracle MIB Variables.....	2-6

3 Designing Management Applications Based on Oracle MIBs

Using MIB Variables for Different Purposes	3-1
Using a Sufficient Sample Size to Calculate Tuning Ratios.....	3-1
Presenting Performance Ratios Graphically	3-2
Scaling MIB Variable Values Dynamically.....	3-2
Working Around the Wraparound.....	3-2
Most Useful Database Instance Performance Ratios	3-3

4 Reading the MIB Variable Descriptions

Variable name	4-1
---------------------	-----

A Interpreting Variables of the Oracle Database MIB

oraDbSysTable	A-2
oraDbSysConsistentChanges.....	A-3
oraDbSysConsistentGets	A-4

oraDbSysDbBlockChanges.....	A-5
oraDbSysDbBlockGets.....	A-6
oraDbSysFreeBufferInspected.....	A-6
oraDbSysFreeBufferRequested.....	A-7
oraDbSysParseCount.....	A-8
oraDbSysPhysReads.....	A-8
oraDbSysPhysWrites.....	A-9
oraDbSysRedoEntries.....	A-10
oraDbSysRedoLogSpaceRequests.....	A-10
oraDbSysRedoSyncWrites.....	A-11
oraDbSysSortsDisk.....	A-12
oraDbSysSortsMemory.....	A-12
oraDbSysSortsRows.....	A-13
oraDbSysTableFetchRowid.....	A-14
oraDbSysTableFetchContinuedRow.....	A-15
oraDbSysTableScanBlocks.....	A-15
oraDbSysTableScanRows.....	A-16
oraDbSysTableScansLong.....	A-17
oraDbSysTableScansShort.....	A-17
oraDbSysUserCalls.....	A-18
oraDbSysUserCommits.....	A-19
oraDbSysUserRollbacks.....	A-19
oraDbSysWriteRequests.....	A-20
oraDbTablespaceTable	A-21
oraDbTablespaceIndex.....	A-21
oraDbTablespaceName.....	A-22
oraDbTablespaceSizeAllocated.....	A-23
oraDbTablespaceSizeUsed.....	A-23
oraDbTablespaceState.....	A-24
oraDbTablespaceLargestAvailableChunk.....	A-25
oraDbDataFileTable	A-25
oraDbDataFileIndex.....	A-26
oraDbDataFileName.....	A-27
oraDbDataFileSizeAllocated.....	A-28
oraDbDataFileDiskReads.....	A-28

oraDbDataFileDiskWrites.....	A-29
oraDbDataFileDiskReadBlocks.....	A-29
oraDbDataFileDiskWrittenBlocks.....	A-30
oraDbDataFileDiskReadTimeTicks.....	A-31
oraDbDataFileDiskWriteTimeTicks.....	A-31
oraDbLibraryCacheTable	A-32
oraDbLibraryCacheIndex	A-33
oraDbLibraryCacheNameSpace	A-34
oraDbLibraryCacheGets	A-34
oraDbLibraryCacheGetHits	A-35
oraDbLibraryCachePins.....	A-35
oraDbLibraryCachePinHits.....	A-36
oraDbLibraryCacheReloads	A-37
oraDbLibraryCacheInvalidations.....	A-37
oraDbLibraryCacheSumTable	A-38
oraDbLibraryCacheSumGets	A-38
oraDbLibraryCacheSumGetHits	A-39
oraDbLibraryCacheSumPins.....	A-40
oraDbLibraryCacheSumPinHits.....	A-40
oraDbLibraryCacheSumReloads	A-41
oraDbLibraryCacheSumInvalidations.....	A-42
oraDbSGATable	A-42
oraDbSGAFixedSize	A-43
oraDbSGAVariableSize	A-44
oraDbSGADatabaseBuffers	A-44
oraDbSGARedoBuffers	A-45
oraDbConfigTable	A-45
oraDbConfigDbBlockBuffers	A-47
oraDbConfigDbBlockCkptBatch	A-48
oraDbConfigDbBlockSize.....	A-48
oraDbConfigDbFileSimWrites.....	A-49
oraDbConfigDbMultiBlockReadCount	A-50
oraDbConfigDistLockTimeout	A-50
oraDbConfigDistRecoveryConnectHold.....	A-51
oraDbConfigDistTransactions	A-51

oraDbConfigLogArchiveBufferSize.....	A-52
oraDbConfigLogArchiveBuffers	A-53
oraDbConfigLogBuffer	A-53
oraDbConfigLogCheckpointInterval.....	A-54
oraDbConfigLogCheckpointTimeout.....	A-54
oraDbConfigLogFiles.....	A-55
oraDbConfigMaxRollbackSegments.....	A-56
oraDbConfigMTSMaxDispatchers.....	A-56
oraDbConfigMTSMaxServers.....	A-57
oraDbConfigMTSServers.....	A-57
oraDbConfigOpenCursors	A-58
oraDbConfigOpenLinks	A-59
oraDbConfigOptimizerMode	A-59
oraDbConfigProcesses	A-60
oraDbConfigSerializable.....	A-61
oraDbConfigSessions	A-61
oraDbConfigSharedPool.....	A-62
oraDbConfigSortAreaSize	A-63
oraDbConfigSortAreaRetainedSize	A-63
oraDbConfigTransactions	A-64
oraDbConfigTransactionsPerRollback.....	A-64
oraRepTable	A-65
oraRepPending2PhaseCommits.....	A-65
oraRepDisabledTriggers.....	A-66
oraRepInvalidPackages	A-67
oraRepSchemas.....	A-67
oraRepSchemaTable	A-68
oraRepSchemaIndex.....	A-68
oraRepSchemaName	A-69
oraRepSchemaType.....	A-70
oraRepSchemaStatus.....	A-70
oraRepSchemaLinks.....	A-71
oraRepMasterSchema Table	A-72
oraRepMasterSchemaRequestErrors	A-72
oraRepMasterSchemaResolvedConflicts	A-73

oraRepMasterSchemaOtherMasters	A-74
oraRepSnapshotSchemaTable	A-74
oraRepSnapshotSchemaMaster	A-75
oraRepSnapshotSchemaSnapshots	A-75
oraRepLinkTable	A-76
oraRepLinkIndex	A-76
oraRepLinkName	A-77
oraRepLinkDeferredTransactions	A-78
oraRepLinkErrors	A-78
oraRepLinkAdminRequests	A-79

B Interpreting Variables of the Oracle Network Listener MIB

oraListenerTable	B-1
oraListenerIndex	B-2
oraListenerName	B-3
oraListenerVersion	B-3
oraListenerStartDate	B-4
oraListenerUptime	B-5
oraListenerTraceLevel	B-5
oraListenerSecurityLevel	B-6
oraListenerParameterFile	B-6
oraListenerLogFile	B-7
oraListenerTraceFile	B-8
oraListenerState	B-8
oraListenerNumberOfServices	B-9
oraListenerContact	B-9
oraSIDTable	B-10
oraSIDListenerIndex	B-11
oraSIDName	B-11
oraSIDCurrentConnectedClients	B-12
oraSIDReservedConnections	B-13
oraDedicatedSrvTable	B-13
oraDedicatedSrvIndex	B-14
oraDedicatedSrvEstablishedConnections	B-15
oraDedicatedSrvRejectedConnections	B-15

oraDispatcherTable	B-16
OraDispatcherIndex.....	B-17
oraDispatcherEstablishedConnections.....	B-17
oraDispatcherRejectedConnections.....	B-18
oraDispatcherCurrentConnections.....	B-18
oraDispatcherMaximumConnections.....	B-19
oraDispatcherState.....	B-20
oraDispatcherProtocolInfo.....	B-20
oraPrespawndSrvTable	B-21
oraPrespawndSrvIndex.....	B-22
oraPrespawndSrvEstablishedConnections.....	B-23
oraPrespawndSrvRejectedConnections.....	B-23
oraPrespawndSrvCurrentConnections.....	B-24
oraPrespawndSrvMaximumConnections.....	B-24
oraPrespawndSrvState.....	B-25
oraPrespawndSrvProtocolInfo.....	B-26
oraPrespawndSrvProcessorID.....	B-26
oraListenAddressTable	B-27
oraListenAddressIndex.....	B-27
oraListenAddress.....	B-28
oraListenerTraps	B-28
oraListenerStateChange.....	B-29

C Interpreting Variables of the Oracle Names MIB

oraNamesTNSTable	C-1
oraNamesTNSTraceLevel.....	C-2
oraNamesTNSParameterFile.....	C-3
oraNamesTNSLogFile.....	C-3
oraNamesTNSTraceFile.....	C-4
oraNamesTNSContact.....	C-5
oraNamesTNSReload.....	C-5
oraNamesTNSRunningTime.....	C-6
oraNamesConfigTable	C-6
oraNamesConfigAdminRegion.....	C-8
oraNamesConfigAuthorityRequired.....	C-9

oraNamesConfigAutoRefreshExpire	C-9
oraNamesConfigAutoRefreshRetry	C-10
oraNamesConfigCacheCheckpointFile	C-11
oraNamesConfigCacheCheckpointInterval.....	C-11
oraNamesConfigDefaultForwardersOnly	C-12
oraNamesConfigForwardingAvailable.....	C-13
oraNamesConfigForwardingDesired	C-14
oraNamesConfigLogStatsInterval.....	C-14
oraNamesConfigMaxReforwards	C-15
oraNamesConfigNoModifyRequests	C-15
oraNamesConfigResetStatsInterval	C-16
oraNamesConfigServerName	C-17
oraNamesServerTable	C-17
oraNamesServerQueriesReceived.....	C-19
oraNamesServerQueriesTotalTime.....	C-20
oraNamesServerCorruptMessagesReceived	C-20
oraNamesServerResponsesSent.....	C-21
oraNamesServerAliasLoopsDetected	C-22
oraNamesServerLookupsAttempted.....	C-22
oraNamesServerCreatedOnLookup	C-23
oraNamesServerLookupFailures.....	C-23
oraNamesServerExactMatches	C-24
oraNamesServerForwardFailures	C-25
oraNamesServerForwardTimeouts.....	C-25
oraNamesServerResponsesReceived	C-26
oraNamesServerRequestsForwarded	C-26
oraNamesServerReloadCheckFailures	C-27
oraNamesServerName	C-28
oraNamesServerAdminRegion.....	C-28

D Interpreting Variables of the Public RDBMS MIB

rdbmsDbTable	D-2
rdbmsDbIndex	D-2
rdbmsDbPrivateMIBOID.....	D-3
rdbmsDbVendorName	D-3

rdbmsDbName.....	D-4
rdbmsDbContact.....	D-5
rdbmsDbInfoTable	D-5
rdbmsDbInfoProductName	D-6
rdbmsDbInfoVersion	D-7
rdbmsDbInfoSizeUnits	D-7
rdbmsDbInfoSizeAllocated.....	D-8
rdbmsDbInfoSizeUsed.....	D-9
rdbmsSrvTable	D-9
rdbmsSrvPrivateMIBOID.....	D-10
rdbmsSrvVendorName.....	D-11
rdbmsSrvProductName.....	D-11
rdbmsSrvContact.....	D-12
rdbmsSrvInfoTable	D-13
rdbmsSrvInfoStartupTime	D-14
rdbmsSrvInfoFinishedTransactions.....	D-14
rdbmsSrvInfoDiskReads.....	D-15
rdbmsSrvInfoLogicalReads.....	D-16
rdbmsSrvInfoDiskWrites.....	D-16
rdbmsSrvInfoLogicalWrites.....	D-17
rdbmsSrvInfoPageReads	D-18
rdbmsSrvInfoPageWrites	D-18
rdbmsSrvInfoRequestsHandled	D-19
rdbmsSrvInfoHighwaterInboundAssociations.....	D-20
rdbmsSrvInfoMaxInboundAssociations	D-20
rdbmsSrvParamTable	D-21
rdbmsSrvParamName	D-22
rdbmsSrvParamSubIndex	D-23
rdbmsSrvParamCurrValue	D-23
rdbmsRelTable	D-24
rdbmsRelState	D-25
rdbmsTraps	D-25
rdbmsStateChange	D-26

E Interpreting Implemented Variables of the Network Services MIB

applTable	E-1
applIndex	E-3
applName.....	E-4
applVersion.....	E-5
applUptime.....	E-5
applOperStatus	E-6
applLastChange	E-7
applInboundAssociations.....	E-8
applAccumulatedInboundAssociations.....	E-8
applAccumulatedOutboundAssociations.....	E-9
applRejectedInboundAssociations.....	E-10
applFailedOutboundAssociations.....	E-10

F Interpreting Variables of the Enterprise Manager MIB

oraAgentEventTable	F-1
oraAgentEventIndex	F-2
oraAgentEventName.....	F-2
oraAgentEventID	F-3
oraAgentEventService.....	F-4
oraAgentEventTime	F-4
oraAgentEventSeverity.....	F-5
oraAgentEventUser	F-5
oraAgentEventAppID.....	F-6
oraAgentEventMessage	F-7
oraAgentEventArguments	F-7
oraAgentEventResults.....	F-8
oraAgentTraps	F-9
oraAgentEventOcc.....	F-9

G Keyboard Shortcuts

Glossary

Index

Figures

1-1	Basic Components of Oracle SNMP support.	1-4
1-2	The MIB Hierarchy.....	1-9
G-1	General Windows Keyboard Shortcuts.....	G-2

Tables

A-1	oraDbSysTable Variables and Corresponding Object IDs	A-2
A-2	oraDbTablespaceTable Variables and Corresponding Object IDs.....	A-21
A-3	oraDbDataFileTable Variables and Corresponding Object IDs.....	A-26
A-4	oraDbLibraryCacheTable Variables and Corresponding Object IDs	A-33
A-5	oraDBLibraryCacheSum Table Variables and Corresponding Object IDs.....	A-38
A-6	oraDbSGATable Variables and Corresponding Object IDs	A-43
A-7	oraDbConfigTable Variables and Corresponding Object IDs	A-46
A-8	oraRep Table Variables and Corresponding Object IDs.....	A-65
A-9	oraRepSchema Table Variables and Corresponding Object IDs.....	A-68
A-10	oraRepMasterSchema Table Variables and Corresponding Object IDs.....	A-72
A-11	oraRepSnapshotSchema Table Variables and Corresponding Object IDs.....	A-74
A-12	oraRepLink Table Variables and Corresponding Object IDs.....	A-76
B-1	oraListenerTable Variables and Corresponding Object IDs	B-2
B-2	oraSIDTable Variables and Corresponding Object IDs	B-10
B-3	oraDedicatedSrvTable Variables and Corresponding Object IDs.....	B-14
B-4	oraDispatcherTable Variables and Corresponding Object IDs	B-16
B-5	oraPrespawndSrvTable Variables and Corresponding Object IDs.....	B-22
B-6	oraListenAddressTable Variables and Corresponding Object IDs.....	B-27
B-7	oraListenerTraps Variable and Corresponding Object ID	B-28
C-1	oraNamesTNSTable Variables and Corresponding Object IDs	C-2
C-2	oraNamesConfigTable Variables and Corresponding Object IDs	C-7
C-3	oraNamesServerTable Variables and Corresponding Object IDs.....	C-18
D-1	rdBmsDbTable Variables and Corresponding Object IDs.....	D-2
D-2	rdBmsDbInfoTable Variables and Corresponding Object IDs	D-6
D-3	rdBmsDbSrvTable Variables and Corresponding Object IDs.....	D-10
D-4	rdBmsDbSrvInfoTable Variables and Corresponding Object IDs.....	D-13
D-5	rdBmsDbSrvParamTable Variables and Corresponding Object IDs	D-22
D-6	rdBmsRelTable Variables and Corresponding Object IDs	D-24
D-7	rdBmsTraps Variables and Corresponding Object IDs.....	D-25
E-1	applTable Variables Implemented for Two Oracle Services.....	E-2
E-2	applTable Variables and Corresponding Object IDs	E-3
F-1	oraAgentEventTable Variables and Corresponding Object IDs.....	F-1
F-2	oraAgentTraps Variables and Corresponding Object IDs	F-9

Send Us Your Comments

Oracle SNMP Support Reference Guide, Release 8.1.7

Part No. A85249-01

Oracle Corporation welcomes your comments and suggestions on the quality and usefulness of this document. Your input is an important part of the information used for revision.

- Did you find any errors?
- Is the information clearly presented?
- Do you need more information? If so, where?
- Are the examples correct? Do you need more examples?
- What features did you like most?

If you find any errors or have any other suggestions for improvement, please indicate the document title and part number, and the chapter, section, and page number (if available). You can send comments to us in the following ways:

- FAX: (650) 506-7200 Attn: System Management Products
- Postal service:
Oracle Corporation
Oracle System Management Products Documentation Manager
500 Oracle Parkway, 50p5
Redwood Shores, CA 94065
USA

If you would like a reply, please give your name, address, telephone number, and (optionally) electronic mail address.

If you have problems with the software, please contact your local Oracle Support Services.

Preface

This guide covers the Oracle SNMP Support feature and the public and private MIBs that support its use with certain products. This information is provided to assist you in developing SNMP-based management applications for these products.

Audience

This manual is intended primarily for third-party developers of SNMP-based management applications. While these readers may have a good working knowledge of SNMP, they may not be as familiar with relational databases, or Oracle products in particular. A secondary audience for this manual includes database administrators, who may be familiar with Oracle products, but who may be less familiar with SNMP.

Related Oracle Publications

Several other Oracle publications include information relating to topics covered in this manual. Where the system (Oracle7 or Oracle8i) is not specified, consult your system-specific documentation:

- *Oracle8i Concepts*

Includes a technical introduction to the Oracle Server, and covers important topics including:

- basic database structure and operation
- system architecture
- data access
- programmatic constructs

- database security
- distributed database processing
- database backup and recovery

Refer to this book for further information on database topics and terms mentioned in this manual.

- *Oracle8i Reference*

Includes reference information on sources from which the values for private Oracle database MIB variable are retrieved, including:

- configuration parameters for the Oracle7 or Oracle8 Server
- data dictionary tables
- dynamic performance tables

Refer to this book for further information on SNMP-retrievable parameters and variables for the public and private database MIBs.

- *Oracle8i Tuning Guide*

Describes how to tune the Oracle7 or Oracle8 Server, and includes information on:

- configuration parameters for the Oracle7 or Oracle8 Server
- data dictionary tables
- dynamic performance tables

Refer to this book if you choose to learn about certain SNMP-retrievable variables as they relate to various database performance tuning tasks. Such task-oriented information can provide further context for the MIB variable reference information of the *Oracle SNMP Support Reference Guide*.

- *Understanding SQL*Net*

Describes SQL*Net, including

- the purpose, function and architecture of SQL*Net
- the purpose and function of the Listener
- configuration parameters for SQL*Net and the Listener

Refer to this book for further information about the functions of SQL*Net, the Listener, and the SNMP-retrievable configuration parameters for these products.

- *Oracle Names Administrator's Guide*
Describes the Oracle Names product, including
 - the purpose and function of Oracle Names
 - configuration parameters for Oracle Names
 Refer to this book for further information about the functions of Oracle Names and its SNMP-retrievable configuration parameters.
- Oracle operating system-specific manuals include installation instructions for Oracle SNMP Support on a given platform.
Refer to this book for installation instructions and other information that is platform or operating system specific.
- *Oracle Enterprise Manager Configuration Guide*
Refer to this book for configuration information for
 - Oracle Enterprise Manager
- *Oracle Intelligent Agent User's Guide*
Refer to this book for configuration information for
 - the Intelligent Agent
 - Oracle Enterprise Manager SNMP support

How This Manual Is Organized

The Oracle SNMP Support Reference Guide includes four chapters and six appendices.

- | | |
|-----------|--|
| Chapter 1 | Provides a general overview of Oracle SNMP Support for Oracle7 and Oracle8 Servers, Listener, Oracle MultiProtocol Interchange, Oracle Names and Oracle Enterprise Manager. It covers the benefits, basic terms and components of the feature. |
| Chapter 2 | Describes the Oracle products providing SNMP support, the MIBs supporting these products, and how to interpret SNMP object identifiers (OIDs). |

- Chapter 3 Includes suggestions to assist you in developing the most useful management applications for Oracle products. Using a sufficient sample size to calculate ratios, presenting performance ratios graphically, scaling values dynamically, working around the wraparound, and the top twenty database performance ratios are covered.
- Chapter 4 Covers the format used to describe MIB variables in the appendices of this manual.
- Appendix A Provides information to help you interpret and present individual variables of the private Oracle7 and Oracle8 Database MIBs. These variables support monitoring of the Oracle7 and Oracle8 Servers.
- Appendix B Provides information to help you interpret and present individual variables of the private Oracle Listener MIB. These variables support monitoring of the listener service.
- Appendix C Provides information to help you interpret and present individual variables of the private Oracle Names MIB. These variables support monitoring of the Oracle Names product.
- Appendix D Provides information to help you interpret and present individual variables of the public RDBMS MIB. These variables support monitoring of the Oracle7 and Oracle8 Servers.
- Appendix E Provides information to help you interpret and present individual variables of the public Network Services MIB. These variables support monitoring of the Oracle Server7, Oracle Server8 and Oracle Names products.
- Appendix F Provides information to help you interpret and present individual variables of the private Oracle Enterprise Manager MIB. These variables support monitoring of databases with Oracle Enterprise Manager.
- Appendix G Provides a list of general Windows keyboard shortcuts.

Other Related Documents

Any developer of management applications for Oracle SNMP Support must be familiar with SNMP concepts. Standard texts include:

- *How to Manage Your Network Using SNMP: The Networking Management Practicum*, Marshall T. Rose, Keith McCloghrie, Prentice Hall, 1995.

- *Managing Internetworks with SNMP*, Second edition, Mark A. Miller, M & T Books, 1997.
- *Network Management Standards: SNMP, CMIP, TMN, MIBS, and Object Libraries*, Second edition, Uyles Black, McGraw Hill Text, 1994.
- *SNMP, SNMPv2, and RMON: The Practical Network Management*, Second edition, William Stallings, Addison-Wesley, 1996.
- *The Simple Book: An Introduction to Networking Management*, Second edition with CD, Marshall T. Rose, Prentice Hall, 1996.
- *Total SNMP: Exploring the Simple Network Management Protocol*, Second Edition, Sean J. Harnedy, Prentice Hall, 1997.

Relevant RFCs include:

- RFC 1441, *Introduction to version 2 of the Internet-standard Network Management Framework*.
- RFC 1442, *Structure of Management Information for version 2 of the Simple Network Management Protocol*.
- RFC 1565, *The Network Services Monitoring MIB*.
- RFC 1697, *The RDBMS MIB*.

Relevant Oracle MIB Definitions include:

- *Oracle RDBMS MIB*
- *Oracle Listener MIB*
- *Oracle Names MIB*

Notational Conventions

The following syntax conventions are used in this manual:

Convention	Meaning
Monospace normal	Monospace shows computer display or contains text you must enter exactly as shown.
<i>Monospace italics</i>	Monospace in italics represents a command parameter or variable. Substitute an appropriate value.

UPPERCASE	Uppercase characters within the text represent command names, filenames, and directory names. Note that in case-sensitive operating systems, such as UNIX, these names may not necessarily be in upper-case.
<i>Italics</i>	Text in italics usually indicates a variable for which you need to substitute a value. Italics are also used to draw attention to the first instance of a defined term in the text.

Overview of Oracle SNMP Support

This chapter provides a brief overview of Oracle SNMP Support, including:

- Benefits of Oracle SNMP Support
- How SNMP Works
- The Components of SNMP
- How SNMP Communications Are Performed
- SNMP Support On Oracle
- Configuring SNMP for Oracle

The Simple Network Management Protocol (SNMP) is acknowledged as the published, open standard for heterogeneous network management applications.

Designed primarily for database, network, and system administrators, Oracle SNMP Support integrates the management of Oracle products into a number of existing, widely-used management systems. This feature enables key Oracle products running anywhere on an enterprise's network to be located, identified, and monitored by a management station running at a centrally located node, in much the same way and using much the same tools as traditionally have been used to monitor the activity of the network itself. It thereby integrates the tasks of database and of network administrators, enabling both to use some of the same tools and to better integrate their tasks. Tools using SNMP traditionally provide powerful features for monitoring network components. Oracle extends this power to enable SNMP monitoring of some of its own products.

Benefits of Oracle SNMP Support

The primary benefits of Oracle SNMP Support include the following:

- The monitoring of key Oracle products is quickly integrated into any management framework based upon SNMP.
- These Oracle products are located, identified, and monitored in real time across enterprise networks of any size.
- Administrators see standard Oracle icons that represent Oracle products in a network map. This map is dynamically customizable. In fact, administrators can define and customize various network maps for different purposes.
- Administrators see the current status of Oracle products, as shown by several status variables that are defined for each product in a management information base (MIB), or they can select which elements to view on the basis of their status.
- Administrators can anticipate exceptional conditions by defining thresholds and alerts, to respond to special situations as soon as they occur or to enable automatic responses.
- Administrators can more readily determine key characteristics of Oracle objects, such as database size, number of users, and activity level.
- Administrators can store and analyze historical data that has been obtained through SNMP.
- Providers of management applications can easily build customized solutions for Oracle customers because SNMP is an open standard.

Strictly speaking, Oracle SNMP Support is intended more for *monitoring* Oracle products than for *managing* them. Oracle SNMP Support is invaluable for tracking the status of an entire network of Oracle applications — first, to verify normal operations, and second, to spot and react to potential problems as soon as they are detected. However, for purposes of investigating and ameliorating some problems, other Oracle tools such as Oracle Server Manager may be more appropriate. This is because Oracle SNMP Support is designed to query status, but not to change system parameters, whereas other tools are designed to set or tune system parameters. Oracle does not support using SNMP to change, as opposed to query, system parameters primarily because the security that SNMP currently can provide is not considered adequate.

How SNMP Works

SNMP (Simple Network Management Protocol) is a standard internet protocol enabling certain nodes in a network, the *management stations* or *managing nodes*, to query other network components or applications for information concerning their status and activities. Such a query is known as an SNMP *poll*. The items that can be so polled are called *managed elements*. Traditionally, managed elements were limited to network components such as bridges and routers, but recently the definition has been extended to include mission-critical applications such as databases.

The software used by a management station is called a *management framework* or *management platform*. The management framework uses the SNMP protocol to request information from *agents* on the nodes being managed, and those agents send back the appropriate responses. The agents can also, independently of the framework, transmit messages called *traps* to well-known addresses in response to specific events. This is done to enable quick and possibly automatic reactions to the specific conditions that the traps indicate.

All requests sent to a given network node are handled by the same *master agent*. This agent redirects the requests to the appropriate managed elements on the node, in some cases using *subagents*. The protocol used for this is not yet standardized and is not SNMP. The information that SNMP can obtain is described in a structure called a *Management Information Base (MIB)*, which is located on the node of the managed element.

Figure 1-1 shows the components of a management station and of a sample managed node.

The Components of SNMP

The components shown in Figure 1-1 are explained in the sections that follow.


Management Station

The management station refers to a node from which managed elements are monitored using the SNMP protocol. Typically, it is a stand-alone workstation that is on the same network or internetwork as the managed elements. While this book will consistently use the term management station, other terms used for it include management console, management system, or managing node.

Management Framework

At the management station, the management framework uses SNMP to request management information from other nodes. The framework collects, graphs, and possibly acts on that SNMP data, and saves some or all of it in a repository for historical analysis and reporting. Management frameworks include many tools and options. In addition to directly requesting information from managed nodes, frameworks typically use daemons to alert them when a managed node has sent a trap in response to a specific set of conditions. The traps also can be used to trigger management applications.

Figure 1-1 Basic Components of Oracle SNMP support.

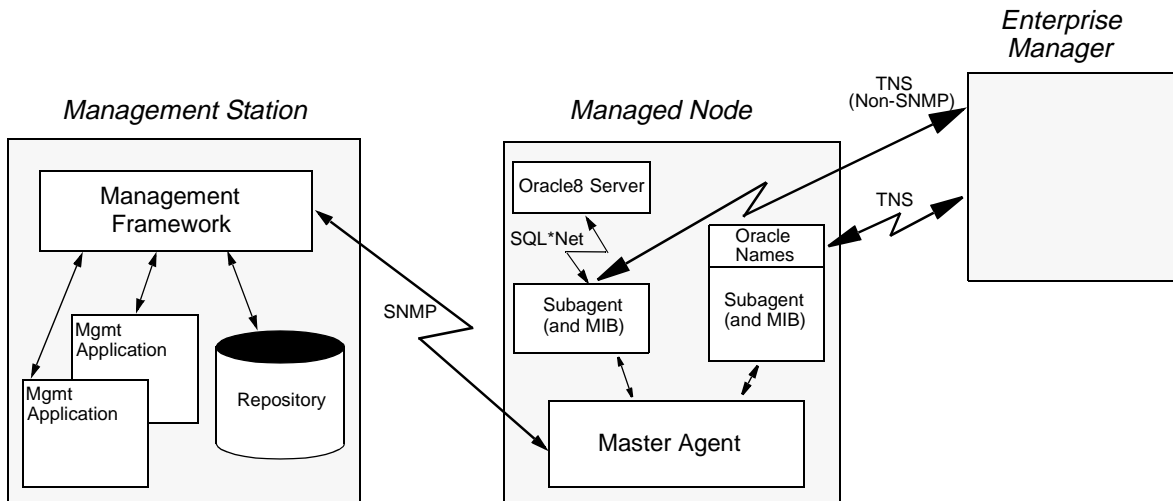

Because most frameworks use SNMP as a basis for communication, Oracle products that support SNMP can be integrated into virtually every management framework. Examples of such frameworks include:

- CA Unicenter
- HP OpenView
- IBM Netview/6000
- DEC Netview POLYCENTER

- Sun SunNet Manager
- Tivoli
- Novell Network Management System (NMS)
- Bull Integrated System Management (ISM)
- Cabletron Spectrum
- Castle Rock SNMP Network Manager

Most of today's management frameworks also provide a selection of graphical objects that management applications may use to build a graphical user interface that serves their particular needs, such as:

- maps illustrating logical or physical network topologies
- icons representing individual network components
- graphing tools such as dials, bar charts, line plots, and so on, for effective monitoring of management information variables

Management Application

The management applications are the tools integrated with the management framework to accomplish more specialized network or database tasks. These applications contain virtually all of the sophisticated logic associated with network management.

A customized management application can work with one or more frameworks (on different management stations) or run independently. Because Oracle SNMP Support is equally accessible to any type of provider, there are many different ways that applications can utilize it.

A fundamental management application, often shipped by default along with the management framework, is one that is capable of discovering the network topology and collecting some basic identification information about each discovered network entity or service. Such an application, for instance, may discover all hosts in a subnet along with their vendor, location, and status. Using this information, the management application can subsequently build up logical maps of the environment.

Managed Node

The managed node is a platform, such as a UNIX server, on which elements to be monitored reside. In Figure 1-1, two managed elements — an Oracle7 or Oracle8 server and Oracle Names — are located on the managed node.

Master Agent

The master agent is the process on a managed node that accepts queries, also called "polls", from the management framework and communicates with the elements to be managed in order to answer the query. It also can send SNMP traps independently in response to specific conditions. Only one master agent can exist on each managed node. Any node that does not have an agent will not be able to respond to SNMP requests, but this does not prevent other nodes on the network from doing so. In other words, it is not necessary that every node in a network be able to respond to SNMP, although this is normally desirable.

The master agent may be either *monolithic* or *extensible*. If it is monolithic, it communicates directly with the elements to be managed. Although such an agent can manage multiple elements on the same node, the set of elements that it can manage is fixed when the agent is created, because the monolithic agent itself is responsible for interfacing to the managed elements.

If, on the other hand, the master agent is extensible, it will use a specific *subagent* for each element it has to manage. That subagent is then responsible for interfacing to the element. In this scenario, new subagents can register with the master agent at any time, so new managed elements can be added dynamically.

Some operating systems supply only monolithic agents. In this case, Oracle provides a master agent that can effectively treat that monolithic agent as a subagent, enabling new managed elements to be added to the node dynamically.

Subagent

The subagent is a process that receives queries for a particular managed element from the master agent and sends back the appropriate answers to the master agent. One subagent exists for each managed element residing on the managed node (with the exception that a single subagent can handle multiple Oracle database instances on the same node). In Figure 1-1, one subagent is dedicated to the Oracle7 or Oracle8 server application and another subagent is dedicated to the Names application. The subagent(s) and master agent communicate using a multiplexing protocol dictated by the master agent. There is no standard protocol for this

connection, and, while a few protocols are widely used, none is a designated standard.

Notice that the subagent for the Oracle7 and Oracle8 servers is a separate process that communicates with the server through SQL*Net (using the IPC protocol). The Oracle Names subagent, on the other hand, is embedded in the application software itself. Both of these approaches are acceptable, as the specific means the subagents use to extract SNMP values are opaque to the master agent and to the framework.

Oracle Enterprise Manager

Oracle Enterprise Manager is a system management tool which provides an integrated solution for managing a heterogeneous environment. It combines a graphical console, agents, common services, and tools to provide an integrated, comprehensive systems management platform for managing Oracle products.

Oracle Enterprise Manager does not use SNMP directly. Instead, it communicates with the agent over SQL*Net using Transparent Network Substrate (TNS) connections. The agent listens to SNMP requests and passes them on to Oracle Enterprise Manager.

Intelligent Agents

The agents are intelligent processes running on remote nodes in the network. An agent resides on the same node as the service it supports. However, the agent can support more than one service on a particular node. For example, if two databases are installed on one machine, a single agent can support both databases. The agents perform such tasks as running jobs and monitoring events. They are also responsible for handling SNMP requests, if SNMP is supported on the agent's platform.

The agents support SNMP so applications can communicate directly with the agent using SNMP protocol on supported platforms. The agents provide access to Oracle's database Management Information Base (MIB) variables. Although the agent supports SNMP, the Oracle Enterprise Manager Communication Daemon uses TNS to communicate with the agent. Therefore, with Oracle Enterprise Manager, you can submit jobs or events that access Oracle MIB variables through the Daemon even when the database resides on a platform that does not support SNMP.

Management Information Base (MIB)

A management information base (MIB) is a text file, written in ASN.1 notation, which describes the variables containing the information that SNMP can access. The variables described in a MIB, which are also called *MIB objects*, are the items that can be monitored using SNMP. There is one MIB for each element being monitored. Each monolithic or subagent consults its respective MIB in order to learn the variables it can retrieve and their characteristics. The encapsulation of this information in the MIB is what enables master agents to register new subagents dynamically — everything the master agent needs to know about the subagent is contained in its MIB. The management framework and management applications also consult these MIBs for the same purpose. In Figure 1–1, two MIBs exist, one for the Oracle Server and one for Oracle Names. MIBs can be either standard (also called public) or proprietary (also called private or vendor).

The actual values of the variables are not part of the MIB, but are retrieved through a platform-dependent process called “instrumentation”. The concept of the MIB is very important because all SNMP communications refer to one or more MIB objects. What is transmitted to the framework is, essentially, MIB variables and their current values.

All MIBs are, in fact, part of one large hierarchical structure, with leaf nodes containing unique identifiers, data types, and access rights for each variable and the paths providing classifications. There is a standard path structure that includes branches for private subtrees. A portion of this structure is shown in Figure 1–2.

Each leaf of this tree provides the following information about one MIB variable:

- the variable’s name
- the Object Identifier (OID) of the variable
- the variable’s data type
- the access rights associated with the variable
- a textual description of the meaning of the variable


The variable’s name is intended to be descriptive, whereas the OID is a number that describes the path taken through the tree to reach that variable. For example, the variable named `sysContact`, identified by the OID 1.3.6.1.2.1.1.4 (meaning `iso.org.dod` and so on), is a read-write string variable that contains contact information about the administrator of the underlying system.

All objects contained under the *mgmt* branch of Figure 1–2 (in other words, all objects with OID’s beginning 1.3.6.1.2) are considered standard and are tightly regulated by the Internet Engineering Task Force (IETF). For example, the standard

RDBMS MIB lives under the *mgmt* branch and is supported by all relational database servers that claim to be SNMP-enabled. Oracle further adds its own MIB objects under the private branch to increase the manageability of its products. The following MIBs are specific to Oracle Services and are found under the {private.enterprise.oracle} branch:

- the Oracle Database MIB
- the Oracle Listener MIB
- the Oracle Names MIB

Figure 1-2 The MIB Hierarchy

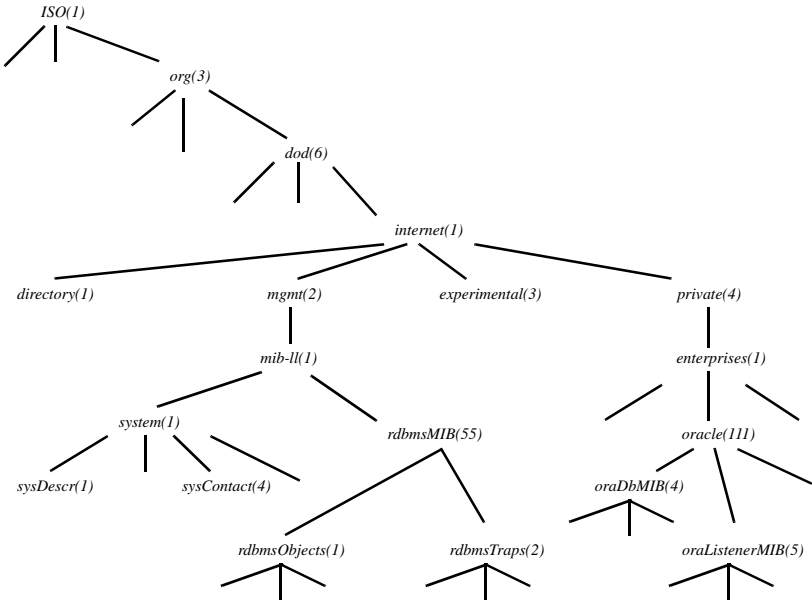

How SNMP Communications Are Performed

SNMP is based on connectionless communication between the framework and the managed nodes. Because most management information does not demand reliable delivery, SNMP packets are transmitted from one node to a well-known address of another node, but no verification of successful delivery is made. The penalty for the

light-weight, connectionless SNMP communication is paid by the management applications, which need to verify that SNMP transactions get completed successfully within a reasonable amount of time. If SNMP packets get lost in the network, the application cancels the associated transaction and possibly re-initiates it.

The most popular SNMP implementation uses the User Datagram Protocol (UDP) over the Internet Protocol (IP), although implementations also exist over other protocols, such as Novell's Internetwork Packet Exchange (IPX) and Apple's AppleTalk.

SNMP Support On Oracle

At the time of this writing, Oracle SNMP Support is provided for the following products:

- Oracle7 Server, release 7.2 (compatible back to 7.0), and higher, on certain platforms
- two networking services (Network Listener and Oracle Names, bundled with SQL*Net release 2.2 and higher)
- Oracle Enterprise Manager

On many platforms, an SNMP master agent is provided directly along with the operating system. This agent may or may not be compatible with the subagents Oracle provides (see "Master Agent" on page 1-6).

Configuring SNMP for Oracle

This section discusses the general procedures for configuring SNMP for Oracle databases and Oracle Enterprise Manager. For more comprehensive configuration information, see the installation or configuration guide specific to your platform.

Configuring SNMP on Windows NT

To configure the Oracle SNMP support on a managed node, follow the procedure outlined below:

1. Specify the port where the master agent is listening.

The port is specified in the `TRANSPORT` section of the `MASTER.CFG` file located in the `$ORACLE_HOME\network\admin` directory.

For example, add the following section to the file:

```
TRANSPORT ordinary SNMP
OVER UDP SOCKET
AT PORT 161"
```

```
..
```

Note: It is recommended that you use port 161 for the Oracle Peer SNMP Master Agent since port 161 is the default port for SNMP communication. However, you may specify a different available port if you can configure the management application on your NMS to send SNMP requests to the master agent listening on this port.

2. Specify the authentication in the `COMMUNITY` section of the `MASTER.CFG` file.

```
COMMUNITY public
ALLOW ALL OPERATIONS
USE NO ENCRYPTION
```

Continue to Step 3 if the Encapsulator is to be used.

3. Specify an unused port where the encapsulated agent, Microsoft SNMP Service, should be listening. Microsoft SNMP Service typically uses port 1161.

The port is specified in the `SERVICES` file located in the `NT_HOME\SYSTEM32\DRIVERS\ETC` directory.

For example, make sure that you have the following line in the file:

```
snmap 1161/udp snmp
```

Note: If an entry for SNMP already exists in the file, change the port from 161 (default number) to another available port (1161 in this example).

4. Edit the Encapsulator configuration file, `ENCAPS.CFG`, located in the `ORACLE_HOME\PEER\ADMIN` directory to specify which non-PEER master agents are to be encapsulated.

You must add at least an `AGENT` entry, including MIB-subtrees manageable by NMS, for the encapsulated master agent.

For example, you should have a section in the file. See the example below:

```
AGENT AT PORT 1161 WITH COMMUNITY public
SUBTREES 1.3.6.1.2.1.1,
          1.3.6.1.2.1.2,
          1.3.6.1.2.1.3,
          1.3.6.1.2.1.4,
          1.3.6.1.2.1.5,
          1.3.6.1.2.1.6,
          1.3.6.1.2.1.7,
          1.3.6.1.2.1.8,
          1.3.6.1.4.1.77
FORWARD ALL TRAPS;
..
```

Note: The port (1161 in this example) must match the one you specified in Step 3.

Configuring SNMP on UNIX Platforms

Using only an SNMP Console

Monitoring consoles use an SNMP Master Agent to communicate with the Oracle Intelligent Agent. The SNMP Master Agent and the Oracle Intelligent Agent must be configured correctly before the Oracle Intelligent Agent can communicate over SNMP to the Master Agent.

1. The following is an example of the process for configuring the SNMP Master Agent on a UNIX platform. For information on configuring the Intelligent Agent, see the *Oracle Enterprise Manager Configuration Guide*.

Note: SNMP with the Intelligent Agent is not supported by all platforms. Refer to the installation or configuration guide for your specific platform to identify differences in the configuration procedures and to confirm SNMP support

Configuring the SNMP Master Agent

The necessary SNMP files are installed along when you install the Oracle Intelligent Agent. After installing the Oracle Intelligent Agent, edit the following files as described below:

- `$(ORACLE_HOME)/network/snmp/peer/CONFIG.master`
- `$(ORACLE_HOME)/network/snmp/peer/CONFIG.encap`
- `$(ORACLE_HOME)/network/snmp/peer/start_peer`
- `/etc/snmpd.config`

CONFIG.Master (Peer Master Agent file)

To edit the `CONFIG.master` file, find the line beginning with `MANAGER` and change the IP address coded in this line to match the IP address of the machine where the SNMP traps will be sent.

CONFIG.encap (Peer Encapsulator file)

To edit the `CONFIG.encap` file, find the line `AGENT AT PORT`. It normally reads `AGENT AT PORT 1161 WITH COMMUNITY public`. If you modify the port number from 1161, you must also modify the `start_peer` script.

start_peer Script

To edit the `start_peer` script, find the line `NEW_SNMPD_PORT=` and verify that it is using the same port number listed above in the `CONFIG.encap` file. Find the line `NEW_TRAPD_PORT=` and verify the port number is different than `NEW_SNMPD_PORT=`.

snmpd.config File

Add the following line to the file:

```
trap <hostname or ipaddress>
```

Replace the information in brackets with the actual hostname or IP address of the local host where the file is located.

Starting the SNMP Agents

1. Make sure no SNMP components are running. The two main components are the `master_peer`, `encap_peer`, and `snmpd`. If any of these processes are running use the `ps` command to find them, and the `kill` command to terminate the processes.

For example:

```
ps -ef | grep snmp
```

Checks to see if the SNMP Master Agent is running.

2. Start the PEER Master Agent , PEER encapsulator, and native Digital UNIX SNMP Agent:

```
cd $ORACLE_HOME/network/snmp/peer
su root
./start_peer -a
```

This command starts all three processes. Then use the `ps` command to determine if all three processes were started:

```
ps -aux |grep peer
ps -aux |grep snmpd
ps -ef | grep snmp
```

Loading the Oracle MIBs

Load the Oracle MIBs according to the instructions provided in your SNMP Console configuration guide.

Configuring SNMP with Oracle Enterprise Manager and an SNMP Console

The necessary SNMP files are installed along when you install the Oracle Intelligent Agent. For information on configuring the Intelligent Agent, see the *Oracle Enterprise Manager Configuration Guide*.

To configure the SNMP Master Agent, follow the steps listed in "Using only an SNMP Console." Then do the following:

1. Configure the SNMP Console to receive external traps on the managed node.
2. When you register an event with Oracle Enterprise Manager, check the "Cause SNMP Trap" box.

If the proper MIBs were loaded into the SNMP console, a trap will be sent to the SNMP Console whenever the event triggers.

Oracle MIB Overview

This chapter covers the following topics:

- Oracle Products Providing SNMP Support
- MIBs Supporting These Products
- Interpreting SNMP OIDs

Oracle Products Providing SNMP Support

This manual documents four Oracle products that provide SNMP support. These products are:

- the Oracle Server (Oracle7 and Oracle8)
- the Oracle Listener
- Oracle Names
- Oracle Enterprise Manager

Oracle Servers

The Oracle Servers (Oracle7 and Oracle8) are the relational database management systems (RDBMS) developed and sold by Oracle Corporation. These RDBMS include the database that stores information, as well as the server software that accesses and manipulates that information.

For more information about Oracle Server, see the *Oracle Server Concepts* manual specific to your system.

Listener

The Listener is a protocol-independent application listener that receives connections on behalf of applications running over a variety of underlying protocols. The Listener is a component of SQL*Net, Oracle's remote data access product, enabling client/server and server/server communications across any network. It runs as a single process or task.

For more information about the Listener, see the manual *Understanding SQL*Net*.

Oracle Names

Oracle Names is a product that provides a directory service, by making database address and database link information available to all nodes throughout the network.

For more information about Oracle Names, see the manual *Oracle Names Administrator's Guide*.

Oracle Enterprise Manager

Oracle Enterprise Manager provides Oracle database administrators with an intuitive, easy-to-use interface and a high degree of automation through remote task execution and reactive and proactive management capabilities. It also scales to accommodate both very large database configurations, while being flexible enough to handle installations with many databases. Oracle Enterprise Manager includes an open-architecture design, providing third-party vendors and customers with the ability to integrate their applications into Oracle Corporation's system management platform.

MIBs Supporting These Products

Network Services MIB

The public Network Services MIB (as described in RFC 1565) contains generic variables designed to apply to all types of network service applications. Oracle has implemented those variables of this MIB that are relevant to two of the Oracle services:

- Oracle7 Server
- Oracle Names

Specific values for these variables are retrieved from a variety of sources, including configuration files, tables internal to the network service application, and from the master agent itself.

The Listener does not make use of any Network Services MIB variables.

Public RDBMS MIB

The public RDBMS MIB is the proposed standard MIB for relational databases that has been defined by the IETF Working Group. This MIB allows for database discovery, identification of the database, and characterization of database size and activity level.

The public RDBMS MIB includes management variables that are both common to all RDBMSs and independent of vendor.

While this MIB makes a clear distinction between the database and its server, at this time the Oracle database subagent only recognizes the standard Oracle configuration of one database to one server. Thus, it does not account for the Oracle Parallel server or gateways.

The information in this MIB is mostly retrieved from dynamic performance tables (V\$ tables) and the INIT.ORA configuration file of the Oracle7 and Oracle8 Servers.

Private Oracle Database MIB

The private Oracle Database MIB contains additional RDBMS statistics that are specific to the Oracle7 architecture. Like the public RDBMS MIB, the private Oracle Database MIB derives most of its information from dynamic performance tables of the database and from the INIT.ORA database configuration file.

The private Oracle Database MIB is platform-independent. Thus, one Oracle7 or Oracle8 Server MIB applies, whether supported on MVS or Windows or SCO. This allows a DBA to use one MIB, regardless of the number of platforms being managed.

Other Oracle Private MIBs

In addition to the private database MIB, Oracle has defined private MIBs for the following products:

- Oracle Network Listener
- Oracle Names
- Oracle Enterprise Manager

Interpreting SNMP OIDs

This section briefly covers how SNMP object identifiers (OIDs) are assigned, as it pertains to the MIBs that Oracle has implemented. Specifically, this section covers the following topics:

- interpreting Oracle OIDs
- interpreting OIDs for Oracle-implemented public MIBs
- interpreting OIDs for instances of private Oracle MIB variables

For more information on SNMP OIDs, see any of the standard SNMP texts listed in the preface.

For easy reference, tables listing the object identifiers for each object of a given Oracle-implemented MIB can be found in the appendix covering that MIB.

Interpreting Oracle OIDs

The SNMP standard (RFC 1442) specifies that an object identifier (OID) be used to uniquely identify each object. An OID is a sequence of elements that indicates a *hierarchical* organization of identifiers. These elements take the form of a series of "dotted" integers, similar in format to an Internet address.

An example OID for an private Oracle MIB variable follows:

```
1.3.6.1.4.1.111.4.1.7.1.1
```

In this OID:

- The first element (1) refers to the *iso* object
- The second element (3) refers to the *org* object
- The third element (6) refers to the *dod* object
- The fourth element (1) refers to the *internet* object
- The fifth element (4) refers to the *private* object
- The sixth element (1) refers to the *enterprises* object
- The seventh element (111) refers to the Oracle object

Each of the elements listed above are assigned by entities outside Oracle. Thus, all objects within the Oracle ID space (that is, those objects to which Oracle has assigned OIDs), share the root OID 1.3.6.1.4.1.111.

Continuing use of the above example OID for illustration, Oracle has defined the elements of its private ID space as follows:

- The eighth element (4) is the MIB service identifier. Oracle has defined the following MIB service identifiers:
 - 4 - Oracle Private Database MIB
 - 5 - Oracle Listener MIB
 - 6 - Oracle Names MIB
 - 7 - Oracle MultiProtocol Interchange MIB
- The ninth element (1) is the MIB object identifier. Oracle has defined the following MIB object identifiers for each service:
 - 1 - SNMP variable
 - 2 - SNMP trap
- The tenth element (7) is the MIB table identifier (oraDbConfigTable, in this case).
- The eleventh element (1) is the table entry identifier. This element can be considered as a place holder and is always 1.
- The twelfth element (1) is the leaf object identifier (identifying a particular variable in the table).

Interpreting OIDs for Oracle-Implemented Public MIBs

In addition to the four private Oracle MIBs that fall within Oracle OID space, Oracle is implementing portions of two public MIBs (Network Services MIB and RDBMS MIB) that fall outside Oracle OID space. The object IDs for the variables in these MIBs have been assigned in their respective RFCs.

An example OID for a public RDBMS MIB variable follows:

1.3.6.1.2.1.39.1.2.1.3

In this OID, the first four elements (1.3.6.1) match those for the Oracle root ID, indicating that this object falls under the iso, org, dod and internet objects. The fifth element (2), however, indicates that this object falls within the Internet *management* OID space. The seventh element (39) indicates that this object falls within the public RDBMS MIB. All variables of the public RDBMS MIB share this root OID of 1.3.6.1.2.1.39. The ninth element (2) indicates that this object is part of the

rdbmsDbInfoTable. The eleventh element (3) identifies this as the leaf object rdbmsDbInfoSizeUnits.

An example OID for a public Network Services MIB variable follows:

1.3.6.1.2.1.27.1.1.1.6

In this OID, the first four elements (1.3.6.1) match those for the Oracle root ID, indicating that this object falls under the iso, org, dod and internet entities. The fifth element (2), however, indicates that this object falls within Internet *management* OID space. The seventh element (27), indicates that this object falls within the public Network Services MIB. All variables of the public Network Services MIB share this root OID of 1.3.6.1.2.1.27. The ninth element (1) indicates that this object is part of the applTable. The tenth element (6) identifies this as the leaf object applOperStatus.

Interpreting OIDs for Instances of Oracle MIB Variables

Because variables in Oracle's MIBs are defined in tables, there can be multiple instances of a single variable. If, for example, there are two Oracle databases running on a given managed node, each database will have its own value for MIB variables such as applInboundAssociations, rdbmsDbName, and rdbmsSrvInfoDiskReads.

Not all variables are indexed on a per-service basis, as described above. It is also possible for a variable to have many instances for a single database. For example, while rdbmsSrvParamEntry describes a single database configuration parameter, that same managed node will have many instances of rdbmsSrvParamName.

To uniquely identify the multiple instances of these variables, each MIB table is indexed by one or more variables which, together, uniquely identify the rows of the table. (These index variables are conceptually equivalent to the primary key of a relational database table.) To refer to a particular instance of a variable, concatenate the variable's OID with the values of the index variables of the MIB table to which the variable belongs.

For instance, rdbmsDbName is defined within the rdbmsDbTable, which is indexed by the variable rdbmsDbIndex. For example, assume two databases are running on a host, one with SNMP index 2, the other with SNMP index 4. Then the name of the first database can be specified by concatenating the OID for rdbmsDbName (1.3.6.1.2.1.39.1.1.1.4) with the appropriate value of rdbmsDbIndex (2), or 1.3.6.1.2.1.39.1.1.1.4.2. Similarly, the name of the second database is the value of 1.3.6.1.2.1.39.1.1.1.4.4.

If a table is indexed by more than one variable, add the appropriate value of each index variable to the end of the OID, in the order they are listed in the table's MIB definition INDEX clause, separated by dots. The size (oraDbDataFileSizeAllocated, or 1.3.6.1.4.1.111.4.1.3.1.3) of the fifth data file (5) of the second database on the above host (whose rdbmsDbIndex is 4) is the value of 1.3.6.1.4.1.111.4.1.3.1.3.4.5.

Designing Management Applications Based on Oracle MIBs

This chapter covers the following topics:

- Using MIB Variables for Different Purposes
- Using a Sufficient Sample Size to Calculate Tuning Ratios
- Presenting Performance Ratios Graphically
- Scaling MIB Variable Values Dynamically
- Working Around the Wraparound
- Most Useful Database Instance Performance Ratios

Using MIB Variables for Different Purposes

MIB variables can be used for two different purposes. If they are used for fault management, the DBA is interested in significant changes in a variable's value or in a ratio over a short period of time. Once the DBA becomes aware of that change, its cause can be determined and corrected, if necessary. However, MIB variables can also be used to tune performance. In this case, the goal is to establish benchmark performance, as measured by the appropriate variable(s) or ratio(s).

Using a Sufficient Sample Size to Calculate Tuning Ratios

When MIB variables are used for performance tuning, make sure that you poll enough instances of a variable to measure performance with some certainty. Polling 1,000 separate statistics is considered acceptable for any database instance performance ratio mentioned in this chapter. When designing graphic presentations

for these ratios, consider alerting the user when less than 1,000 separate instances of a variable have been used to calculate a tuning ratio.

Presenting Performance Ratios Graphically

In general, users will be most interested in monitoring changes in performance ratios over time. Thus, a basic time series graph that plots changes in the values of these ratios against time is very useful.

Scaling MIB Variable Values Dynamically

The scalar values for MIB variables (and ratios based on these variables) measuring database performance can vary tremendously, depending on the type of database application, the number of users accessing the database, and the amount of data being processed. This fact poses a challenge to the developer of a management application presenting this information. Graphic elements intended to accommodate the full range of scalar values can mislead when presenting scalar values at the low end of the range; even large changes relative to their size can appear insignificant when plotted on a graph designed to accommodate much greater values achievable at other installations.

One good way to accommodate users at both ends of the data spectrum is to scale the presentation of data dynamically. This involves adjusting the scale of the graph measuring the data as the data attains certain thresholds. For example, if you were to plot against time the speed of a jet from takeoff to its cruising level, you might set the upper limit of the graph upon takeoff at 200 mph; when that threshold is reached, you could dynamically adjust the upper limit to 400 mph, and then adjust it twice more as thresholds of 400 and 600 mph are attained.

Working Around the Wraparound

Given the tremendous processing power available today, and given the enormous upper limit to the size of an Oracle database, it may not be surprising that the values of some MIB variables do in fact exceed (wrap around) the SNMP-defined upper limit for 32-bit counter and integer (4294967295) values. A management application designer can best work around this problem by always showing instance startup time (applUpTime) to the user, and encouraging the user to poll the values of such variables frequently enough to determine whether a wrap around has occurred. A minimum of once every one-half hour for "wrap around candidates" is suggested.

If the value of a counter variable has *decreased*, even though the database instance has continued to run, one can assume that the value has wrapped around the upper limit of the range. However, one must poll frequently enough to ensure that the delta of the value is less than the theoretical limit of the range. The values and ratios you present to the user can then take the wraparound into account.

Most Useful Database Instance Performance Ratios

This section describes those ratios that are most useful in tuning the performance of an Oracle7 or Oracle8 database instance. These are the performance measures of greatest interest to potential customers of management applications for the Oracle7 and Oracle8 servers. Each of these ratios is based on variables of the private Oracle Database MIB. These ratios are listed alphabetically, not in order of importance.

For more information on these ratios, see the *Oracle Server Tuning Guide* specific to your system. For information on the MIB variables that are used to calculate these ratios, see Appendix A, "Oracle Database MIB Reference."

Block Changes Per Transaction

This ratio measures the amount of Data Manipulation Language (DML) work that each transaction performs. Creating or dropping indexes impacts this value, because changes to index blocks increment it.

`oraDbSysDbBlockChanges / oraDbSysUserCalls`

Block Get Rate

This ratio determines the block get rate. The block get rate is a basic measure of the rate at which the application system references the database. The time unit typically used in this ratio is one second.

`(oraDbSysConsistentGets + oraDbSysDbBlockGets) / time unit`

Block Visits Per Transaction

This ratio measures the work database load imposed per transaction; if it is moving independently, then this strongly indicates that there has been a change in the application workload.

`(oraDbBlockGets + oraDbSysConsistentGets) / oraDbSysUserCommits`

Cache Hit Ratio

This ratio measures the effectiveness of the buffer cache. The normally acceptable range is 70 - 85%.

`(oraDbSysConsistentGets + oraDbSysBlockGets - oraDbSysPhysReads) /
(oraDbSysConsistentGets + oraDbSysBlockGets)`

Call Rate

This ratio measures the work demand rate being placed on the instance from all work sources. It should be noted, however, that this rate may not be directly comparable across application system version changes where row at a time loop constructs have been recoded as set operations or vice versa. Use of the array interface will also affect this ratio.

$$(\text{oraDbSysRecursiveCalls} + \text{oraDbSysUserCalls}) / \text{time unit}$$

Calls Per Transaction

This ratio measures the number of client requests made per transaction. Calls per transaction can be used to detect changes in the application, or in the ways in which it is being used. This value may rise sharply as ad hoc queries increase.

$$\text{oraDbSysUserCalls} / \text{oraDbSysUserCommits}$$

Changed Block Ratio

This ratio measures the balance between queries and DML within this database application. Changes in this ratio indicate and/or quantify changes in indexation or application usage.

$$\text{oraDbSysDbBlockChanges} / (\text{oraDbSysBlockGets} + \text{oraDbSysConsistentGets})$$

Consistent Change Ratio

This ratio measures the extent to which applications are having to exercise the read consistency mechanism. In this connection, it is important to realize that the query processing parts of UPDATE and/or DELETE operations are subject to read consistency.

$$\text{oraDbSysConsistentChanges} / \text{oraDbSysConsistentGets}$$

Continued Row Ratio

This ratio should be very close to zero, except in applications handling long LONG columns. If this ratio increases over time, usually PCTFREE has been set too low on one or more tables.

$$\text{oraDbSysTableFetchContinuedRow} / (\text{oraDbSysTableFetchRowid} + \text{oraDbSysTableScanRows})$$

Library Cache Miss Ratio

If this ratio begins to rise, then resource usage can be expected to increase. A rising library cache miss ratio may be due to wider use of application functionality causing more SQL statements and stored procedures to be active than had previously been the case.

$$(\text{oraDbLibraryCachePins} - \text{oraDbLibraryCacheReloads}) / \text{oraDbLibraryCachePins}$$

Recursive to User Call Ratio

Under Oracle7 and Oracle8, a change in this ratio can reflect an application change, or indicate a need to adjust the size of the shared pool. Any marked change in the DDL load also affects this ratio.

$\text{oraDbSysRecursiveCalls} / \text{oraDbSysUserCalls}$

Redo Log Space Wait Ratio

This ratio measures memory allocation. If it is greater than 1 / 5,000, then the redo log buffer should be increased until the redo log space wait ratio stops failing.

$\text{oraDbSysRedoLogSpaceRequests} / \text{oraDbSysRedoEntries}$

Row Source Ratio

This ratio measures the percentage of the total rows retrieved which came from full table scans. As soon as this percentage starts to rise much above 0, the interpretation of other statistics may need to be reviewed.

$\text{oraDbSysTableScanRows} / (\text{oraDbSysTableFetchRowid} + \text{oraDbSysTableScanRows})$

Sort Overflow Ratio

$\text{oraDbSysSortsDisks} / (\text{oraDbSysSortsMemory} + \text{oraDbSysSortsDisks})$ is the sort overflow ratio. This ratio yields the ratio of the number of sorts which are using temporary segments. Under restricted circumstances when there is a predominance of medium size sorts, increasing the sort area size may be effective.

$\text{oraDbSysSortsDisks} / (\text{oraDbSysSortsMemory} + \text{oraDbSysSortsDisks})$

Transaction Rate

The transaction rate is a basic measure of application work, and would be calibrated in transactions per second (tps) for a typical OLTP benchmark. Administrators should be particularly concerned if a fall in this value is associated with a rise in the number of connected users or vice versa. Changes in application structure or work patterns can also distort this figure.

$\text{oraDbSysUserCommits}$

User Call Rate

This rate measures the work demand rate being posed by client side applications running under the instance. It should be noted, however, that this may not be directly comparable across application system version changes where code has been moved from client to server side or vice versa.

oraDbSysUserCalls

User Calls Per Parse

This ratio indicates how well the application is managing its context areas. If it changes, then application change is the most likely explanation, but it may also indicate that usage patterns are changing and users are moving from one module to another either more frequently or less frequently.

Although the shared SQL area makes the maximizing of this ratio less important than with earlier versions of Oracle, it is still possible to reduce resource usage by raising this ratio.

`oraDbSysUserCalls / oraDbSysParseCount`

User Rollback Ratio

`oraDbSysUserRollbacks / (oraDbSysUserCommits + oraDbSysUserRollbacks)` is the user rollback ratio. The user rollback ratio indicates the rate at which application transactions are failing. Rolling back a transaction uses significant resources, and would seem to indicate that all of the resources expended in executing the transaction have been wasted.

`oraDbSysUserRollbacks / (oraDbSysUserCommits + oraDbSysUserRollbacks)`

Reading the MIB Variable Descriptions

This chapter covers the format used to describe MIB variables in the six appendices that follow.

Note that the STATUS element of SNMP MIB definition, Version 2, is not included in these MIB variable descriptions. Since Oracle has implemented all MIB variables as CURRENT, this value does not vary.

Variable name

Syntax

Maps to the SYNTAX element of SNMP MIB definition, Version 2.

Max-Access

Maps to the MAX-ACCESS element of SNMP MIB definition, Version 2.

Status

Maps to the STATUS element of SNMP MIB definition, Version 2.

Explanation

Describes the function, use and precise derivation of the variable. (For example, a variable might be derived from a particular configuration file parameter or performance table field.) When appropriate, incorporates the DESCRIPTION part of the MIB definition, Version 2.

Typical Range

Describes the typical, rather than theoretical, range of the variable. For example, while integer values for many MIB variables can theoretically range up to 4294967295, a typical range in an actual installation will vary to a lesser extent. On the other hand, some variable values for a large database can actually exceed this

“theoretical” limit (a “wraparound”). Specifying that a variable value typically ranges from 0 to 1,000 or 1,000 to 3 billion will help the third-party developer to develop the most useful graphical display for the variable.

Significance

Describes the significance of the variable when monitoring a typical installation. Alternative ratings are Very Important, Important, Less Important, or Not Normally Used. Clearly, the DBA will want to monitor some variables more closely than others. However, which variables fall into this category can vary from installation to installation, depending on the application, the size of the database, and on the DBA’s objectives. Nevertheless, assessing a variable’s significance relative to the other variables in the MIB can help third-party developers focus their efforts on those variables of most interest to the most DBAs.

Related Variables

Lists other variables in this MIB, or other MIBs implemented by Oracle, that relate in some way to this variable. For example, the value of this variable might derive from that of another MIB variable. Or perhaps the value of this variable varies inversely to that of another variable. Knowing this information, third-party developers can develop useful graphic displays of related MIB variables.

Suggested Presentation

Suggests how this variable can be presented most usefully to the DBA using the management application: as a simple value, as a gauge, or as an alarm, for example.

Interpreting Variables of the Oracle Database MIB

This appendix provides information to help you interpret individual variables in the private Oracle Database MIB. Specifically, it includes sections covering SNMP variables in the following tables:

- oraDbSysTable
- oraDbTablespaceTable
- oraDbDataFileTable
- oraDbLibraryCacheTable
- oraDbLibraryCacheSumTable
- oraDbSGATable
- oraDbConfigTable
- oraRepTable
- oraRepSchemaTable
- oraRepMasterSchema Table
- oraRepSnapshotSchemaTable
- oraRepLinkTable

For information about the database instance performance ratios listed in this appendix, see the section, “Most Useful Database Instance Performance Ratios,” in Chapter 3, “Designing Management Applications Based on Oracle MIBs.” For more information about the Oracle database server and specific topics covered in this appendix, see the *ORACLE Server Reference*, the *Oracle Server Application Developer’s Guide*, and the *Oracle Server Concepts Manual* specific to your system.

oraDbSysTable

The oraDbSysTable contains various measurements used to support database activities of current sessions on the managed node. This information has been found to be particularly useful for monitoring global database instance performance.

Each entry in the oraDbSysTable represents a current database instance on the node. Each entry is indexed by rdbmsDb Index. However, because rdbmsDbTable contains an entry for each database configured for SNMP support, whether or not it is actively open, there may or may not be a one-to-one correspondence between entries in the two tables at any point in time. (For details about this index, see Appendix D, “Interpreting Variables of the Public RDBMS MIB.”) The value of each oraDbSysTable variable is retrieved directly from a corresponding field in the V\$SYSSTAT table for that database instance on the managed node.

In many cases, a variable is meaningful only when considered in conjunction with other variables, often as a ratio. For more information on the ratios mentioned in the following variable descriptions, and for their significance in tuning the Oracle database server, see the *Oracle Tuning Guide* specific to your system.

Table A-1 oraDbSysTable Variables and Corresponding Object IDs

Variable Name	Object ID
oraDbSysConsistentChanges	1.3.6.1.4.1.111.4.1.1.1.1
oraDbSysConsistentGets	1.3.6.1.4.1.111.4.1.1.1.2
oraDbSysDbBlockChanges	1.3.6.1.4.1.111.4.1.1.1.3
oraDbSysDbBlockGets	1.3.6.1.4.1.111.4.1.1.1.4
oraDbSysFreeBufferInspected	1.3.6.1.4.1.111.4.1.1.1.5
oraDbSysFreeBufferRequested	1.3.6.1.4.1.111.4.1.1.1.6
oraDbSysParseCount	1.3.6.1.4.1.111.4.1.1.1.7

Table A–1 oraDbSysTable Variables and Corresponding Object IDs

Variable Name	Object ID
oraDbSysPhysReads	1.3.6.1.4.1.111.4.1.1.1.8
oraDbSysPhysWrites	1.3.6.1.4.1.111.4.1.1.1.9
oraDbSysRedoEntries	1.3.6.1.4.1.111.4.1.1.1.10
oraDbSysRedoLogSpaceRequests	1.3.6.1.4.1.111.4.1.1.1.11
oraDbSysRedoSyncWrites	1.3.6.1.4.1.111.4.1.1.1.12
oraDbSysSortsDisk	1.3.6.1.4.1.111.4.1.1.1.13
oraDbSysSortsMemory	1.3.6.1.4.1.111.4.1.1.1.14
oraDbSysSortsRows	1.3.6.1.4.1.111.4.1.1.1.15
oraDbSysTableFetchRowid	1.3.6.1.4.1.111.4.1.1.1.16
oraDbSysTableFetchContinuedRow	1.3.6.1.4.1.111.4.1.1.1.17
oraDbSysTableScanBlocks	1.3.6.1.4.1.111.4.1.1.1.18
oraDbSysTableScanRows	1.3.6.1.4.1.111.4.1.1.1.19
oraDbSysTableScansLong	1.3.6.1.4.1.111.4.1.1.1.20
oraDbSysTableScansShort	1.3.6.1.4.1.111.4.1.1.1.21
oraDbSysUserCalls	1.3.6.1.4.1.111.4.1.1.1.22
oraDbSysUserCommits	1.3.6.1.4.1.111.4.1.1.1.23
oraDbSysUserRollbacks	1.3.6.1.4.1.111.4.1.1.1.24
oraDbSysWriteRequests	1.3.6.1.4.1.111.4.1.1.1.25

Table A–1 lists each variable of the oraDbSysTable and its corresponding object ID.

A description of each of these variables follows.

oraDbSysConsistentChanges

Syntax

Counter32

Max-Access

read-only

Explanation

This variable is retrieved directly from the value for CONSISTENT CHANGES in V\$SYSSTAT. It is incremented each time that a consistent get operation cannot accept the block in its current state, owing to a change made since the query consistency point.

oraDbSysConsistentChanges is used to calculate the following database instance performance ratio: the consistent change ratio.

Typical Range

two or more orders of magnitude less than the value of oraDbSysConsistentGets

Significance

important

Related Variables

oraDbSysConsistentGets

Suggested Presentation

counter

oraDbSysConsistentGets

Syntax

Counter32

Max-Access

read-only

Explanation

This variable is retrieved directly from the value for CONSISTENT GETS in V\$SYSSTAT. This value is incremented each time that the Oracle Buffer Manager is requested to locate a database block as part of a read consistent operation (a query). Only if the requested block is not found in Oracle's Buffer Cache will consistent get result in physical I/O.

oraDbSysConsistentGets is used to calculate the following database instance performance ratios: block get rate, block visits per transaction, cache hit ratio, changed block ratio, and the consistent change ratio.

Typical Range

0 - 4294967295; can increment at several thousand per second in the largest systems, so this variable is definitely a "wraparound" candidate

Significance

very important

Related Variables

oraDbSysUserCommits, oraDbSysConsistentChanges, oraDbSysPhysReads, oraDbSysDbBlockChanges, oraDbSysDbBlockGets

Suggested Presentation

counter

oraDbSysDbBlockChanges

Syntax

Counter32

Max-Access

read-only

Explanation

This variable is retrieved directly from the value for DB BLOCK CHANGES in V\$SYSSTAT. It is incremented each time that a database block is in memory to create a “dirty block.” This statistic is a rough indication of total database work.

oraDbSysDbBlockChanges is used to calculate the following database instance performance ratios: block changes per transaction, and the changed block ratio.

Typical Range

0 - 4294967295; can increment at several thousand per second in the largest systems, so this variable is definitely a “wraparound” candidate; value tends to be lower than that for oraDbSysConsistentGets

Significance

one of the lesser measures of work rate or throughput

Related Variables

oraDbSysBlockGets, oraDbSysConsistentGets, oraDbSysUserCalls

Suggested Presentation

counter

oraDbSysDbBlockGets

Syntax

Counter32

Max-Access

read-only

Explanation

This variable is retrieved directly from the value for DB BLOCK GETS in V\$SYSSTAT. It is incremented each time the buffer manager is asked for a database block in current mode, that is, regardless of read consistency. This mode is used to locate blocks which are to be updated, and also to access control information such as segment headers. Only if the requested block is not found in Oracle's Buffer cache will a db block get result in physical I/O.

oraDbSysBlockGets is used to calculate the following database instance performance ratios: block get rate, block visits per transaction, the cache hit ratio, and the changed block ratio.

Typical Range

0 - 4294967295; can increment at several thousand per second in the largest systems, so this variable is definitely a "wraparound" candidate.

Significance

very important

Related Variables

oraDbSysDbBlockChanges, oraDbSysConsistentGets, oraDbSysPhysReads, oraDbSysUserCalls

Suggested Presentation

counter

oraDbSysFreeBufferInspected

Syntax

Counter32

Max-Access

read-only

Explanation

The “free buffer inspected” parameter from V\$SYSTAT.

Typical Range

0 - 4294967295

Significance

This indicates the number of reusable buffers skipped over from the end of the Least Recently Used (LRU) queue in order to find a buffer. The difference between this and “dirty buffers inspected” equals the number of buffers that could not be used because they were busy or needed to be written after rapid aging out. They may have a user, a waiter, or be being read or written.

Related Variables

oraDbSysFreeBufferRequested

Suggested Presentation

counter

oraDbSysFreeBufferRequested

Syntax

Counter32

Max-Access

read-only

Explanation

The “free buffer requested” parameter from V\$SYSTAT.

Typical Range

0 - 4294967295

Significance

This is the count of the number of times a free buffer was requested to create or load a block.

Related Variables

oraDbSysFreeBufferInspected

Suggested Presentation

counter

oraDbSysParseCount

Syntax

Counter32

Max-Access

read-only

Explanation

This variable is retrieved directly from the value for PARSE COUNT(total) in V\$SYSSTAT. It counts the number of parse calls received by the RDBMS from both connected applications and recursive calls. In Oracle7 and Oracle8, parse calls are frequently satisfied by reference to the Shared SQL area and this statistic does *not* measure the number of parses which have taken place, only the number of calls.

oraDbSysParseCount is used to calculate the following database instance performance ratio: user calls per parse.

Typical Range

0 - 4294967295; unlikely to increment at a rate greater than a few hundred per second

Significance

important

Related Variables

oraDbLibraryCacheTable variables, oraDbSysUserCalls

Suggested Presentation

counter

oraDbSysPhysReads

Syntax

Counter32

Max-Access

read-only

Explanation

This variable is retrieved directly from the value for PHYSICAL READS in V\$SYSSTAT. It increments each time a DB Block is retrieved from the disk

subsystem, but is not necessarily equal to the number of I/O requests made to the host operating system, as multiblock I/O may be used. A physical read can be viewed as an SGA Buffer Cache miss, hampering throughput (contention induction) and CPU (code pathlength) processing.

oraDbSysPhysReads is used to calculate the following database instance performance ratio: the cache hit ratio.

Typical Range

0 - 4294967295; unlikely to increment at a rate greater than a few hundred per second

Significance

very important

Related Variables

oraDbSysConsistentGets, oraDbSysDbBlockGets

Suggested Presentation

counter

oraDbSysPhysWrites

Syntax

Counter32

Max-Access

read-only

Explanation

This variable is retrieved directly from the value for PHYSICAL WRITES in V\$SYSSTAT. It increments each time a DB Block is written to disk. All writes are performed either by DBWR or LGWR, two background processes responsible for getting Blocks out of the SGA and back on disk.

Typical Range

0 - 4294967295; can increment at several thousand per second in the largest systems, so this variable is definitely a “wraparound” candidate

Significance

important

Related Variables

oraDbSysRedo family

Suggested Presentation

counter

oraDbSysRedoEntries

Syntax

Counter32

Max-Access

read-only

Explanation

This variable is retrieved directly from the value for REDO ENTRIES in V\$SYSSTAT. Each time that REDO data is copied into the log buffer, this counter is incremented. The value varies in relation to how many changes are being made.

oraDbSysRedoEntries is used to calculate the following database instance performance ratio: redo log space wait ratio.

Typical Range

0 - 4294967295; can increment at several thousand per second in the largest systems, so this variable is definitely a “wraparound” candidate.

Significance

important

Related Variables

oraDbSysRedoLogSpaceRequests, oraDbSysRedoSyncWrites, oraDbSysUserCommits

Suggested Presentation

counter

oraDbSysRedoLogSpaceRequests

Syntax

Counter32

Max-Access

read-only

Explanation

This variable is retrieved directly from the value for REDO LOG SPACE REQUESTS in V\$SYSSTAT. This counts the number of times that a server process had to wait to acquire an entry in the redo log.

oraDbSysRedoLogSpaceRequests is used to calculate the following database instance performance ratios: redo log space wait ratio.

Typical Range

0 - 10,000,000 (a value of 0 is ideal, but an increment of 1 or 2 per second might be acceptable)

Significance

important

Related Variables

oraDbSysRedoEntries

Suggested Presentation

counter

oraDbSysRedoSyncWrites

Syntax

Counter32

Max-Access

read-only

Explanation

This variable is retrieved directly from the value for REDO SYNC WRITES parameter in V\$SYSSTAT. It increments when a process waits for a ReDo write to complete, typically as a result of a Commit.

Typical Range

0 - 10,000,000 (typically increments at less than 1 per second)

Significance

less important

Related Variables

oraDbSysRedoEntries, oraDbSysRedoLogSpaceRequest, oraDbSysUserCommits

Suggested Presentation

counter

oraDbSysSortsDisk

Syntax

Counter32

Max-Access

read-only

Explanation

This variable is retrieved directly from the value for SORTS DISKS in V\$SYSSTAT. It increments for each sort which has to allocate disk work space.

oraDbSysSortsDisks is used to calculate the following database instance performance ratio: the sort overflow ratio.

Typical Range

for OLTP it should be 0

Significance

important

Related Variables

oraDbSysRedoEntries, oraDbSysRedoLogSpaceRequest, oraDbSyncWrites, oraDbSysSortsMemory, oraDbUserCommits

Suggested Presentation

counter

oraDbSysSortsMemory

Syntax

Counter32

Max-Access

read-only

Explanation

This variable is retrieved directly from the value for SORTS MEMORY in V\$SYSSTAT. It is incremented for each sort which does not require the allocation of work space on disk.

oraDbSysSortsMemory is used to calculate the following database instance performance ratio: the sort overflow ratio.

Typical Range

0 - 4294967295; unlikely to increment faster than tens per second, except in the largest systems

Significance

important

Related Variables

oraDbSysRedoEntries, oraDbSysRedoLogSpaceRequest, oraDbSyncWrites, oraDbSysSortsDisks, oraDbUserCommits

Suggested Presentation

counter

oraDbSysSortsRows

Syntax

Counter32

Max-Access

read-only

Explanation

This variable is retrieved directly from the value for SORTS ROWS in V\$SYSSTAT. It is incremented for each sort, regardless of whether the allocation of disk space was required.

Typical Range

0 - 4294967295

Significance

important

Related Variables

oraDbSysRedoEntries, oraDbSysRedoLogSpaceRequest, oraDbSyncWrites, oraDbSysSortsMemory, oraDbSortsDisks, oraDbUserCommits

Suggested Presentation

counter

oraDbSysTableFetchRowid

Syntax

Counter32

Max-Access

read-only

Explanation

This variable is retrieved directly from the value for TABLE FETCH BY ROWID in V\$SYSSTAT. This counter increments when a row is fetched using a RowID (usually recovered from an index). It should be noted that this statistic records all rows visited by the database engine, whether or not they were return to the application.

oraDbSysTableFetchRowid is used to calculate the following database instance performance ratios: the continued row ratio and the row source ratio.

Typical Range

0 - 4294967295; can increment at several tens of thousands per second in the largest systems, so this variable is definitely a “wraparound” candidate

Significance

important

Related Variables

oraDbSysRedoEntries, oraDbSysRedoLogSpaceRequest, oraDbSyncWrites, oraDbSysSortsDisks, oraDbSysTableFetchContinuedRow, oraDbSysTableScanRows, oraDbUserCommits

Suggested Presentation

counter

oraDbSysTableFetchContinuedRow

Syntax

Counter32

Max-Access

read-only

Explanation

This variable is retrieved directly from the value for TABLE FETCH CONTINUED ROW in V\$SYSSTAT. It may be incremented either because a row has been encountered which spans more than a DB block, or because a migrated row has been retrieved by rowid.

oraDbSysTableFetchContinuedRow is used to calculate the following database instance performance ratio: the continued row ratio.

Typical Range

close to 0 unless long LONG values are in use.

Significance

important

Related Variables

oraDbSysTable FetchRowid, oraDbSysTableScanRows

Suggested Presentation

counter

oraDbSysTableScanBlocks

Syntax

Counter32

Max-Access

read-only

Explanation

This variable is retrieved directly from the value for TABLE SCAN BLOCKS GOTTEN in V\$SYSSTAT. During scanning operations, the RDBMS retrieves each row sequentially. This counter increments each time the RDBMS steps into a new DB Block during the scan. oraDbSysTableScanBlocks indicates how many DB Blocks

were Consistently Read from the Buffer Cache for the purpose of scanning. Comparing this to the value of oraDbSysConsistentGets suggests how much Consistent Read activity can be attributed to scanning.

Typical Range

0 - 3 billion; in OLTP very low; in DSS applications, a few thousand per second, so this variable is definitely a “wraparound” candidate.

Significance

important

Related Variables

oraDbSysConsistentGets

Suggested Presentation

counter

oraDbSysTableScanRows

Syntax

Counter32

Max-Access

read-only

Explanation

This variable is retrieved directly from the value for TABLE SCAN ROWS GOTTEN in V\$SYSSTAT. This counter increases each time a row is processed during a Scan operation. Note that the row need not be parsed back to the calling application in order for it to be counted here.

oraDbSysTableScanRows is used to calculate the following database instance performance ratio: the row source ratio, and the continued row ratio.

Typical Range

0 - 100,000,000 per day

Significance

important

Related Variables

oraDbSysTableFetchContinuedRow, oraDbSysTableFetchRowid

Suggested Presentation

counter

oraDbSysTableScansLong**Syntax**

Counter32

Max-Access

read-only

Explanation

This variable is retrieved directly from the value for TABLE SCANS LONG TABLES in V\$SYSSTAT. Long tables are those whose number of data blocks below the high water mark exceeds the value of the initialization parameter SMALL_TABLE_THRESHOLD. DB Blocks visited in Long Full Table Scans are *not* prompted in the LRS List.

Typical Range

in OLTP, typically 0

Significance

important

Related Variables

oraDbSysTableScansShort

Suggested Presentation

counter

oraDbSysTableScansShort**Syntax**

Counter32

Max-Access

read-only

Explanation

This variable is retrieved directly from the value for TABLE SCANS SHORT TABLES in V\$SYSSTAT. Short tables can be defined as tables that do not meet the

long table criteria, as defined by oraDbSysTableScansLong. Short tables are those whose number of data blocks above the low water mark is low than the value of the initialization parameter LONG_TABLE_THRESHOLD.

Typical Range

0 - 4294967295; can increment at a few hundred per second

Significance

important

Related Variables

oraDbSysTableScansLong

Suggested Presentation

counter

oraDbSysUserCalls

Syntax

Counter32

Max-Access

read-only

Explanation

This variable is retrieved directly from the value for USER CALLS in V\$SYSSTAT. A user call is a Parse, an Execute, or a Fetch. With the Oracle server's deferred and bundled execution capabilities, this statistic will not necessarily correlate well with client/server message traffic.

oraDbSysUserCalls is used to calculate the following database instance performance ratios: block changes per transaction, the call rate, calls per transaction, the recursive-to-user call ratio, the user call rate, and user calls per parse.

Typical Range

0 - 10,000,000 per day

Significance

very important

Related Variables

oraDbSysDbBlockChanges, oraDbSysParseCount, oraDbSysRecursiveCalls, oraDbSysUserCommits

Suggested Presentation

counter

oraDbSysUserCommits**Syntax**

Counter32

Max-Access

read-only

Explanation

This variable is retrieved directly from the value for USER COMMITS in V\$SYSSTAT. It records the number of database transactions successfully completed and records the number of aborted database transactions.

oraDbSysUserCommits is used to calculate the following database instance performance ratios: block visits per transaction, calls per transaction, and the transaction rate.

Typical Range

In most real world applications, the value is less the 1 per second.

Significance

In OLTP, very important

Related Variables

oraDbBlockGets, oraDbSysConsistentGets, oraDbUserCalls

Suggested Presentation

counter

oraDbSysUserRollbacks**Syntax**

Counter32

Max-Access

read-only

Explanation

This variable is retrieved directly from the value for USER ROLLBACKS in V\$SYSSTAT. It records the number of aborted database transactions.

oraDbSysUserRollbacks is used to calculate the following database instance performance ratio: the user rollback ratio.

Typical Range

0 - 4294967295

Significance

important

Related Variables

oraDbSysUserCommits

Suggested Presentation

counter

oraDbSysWriteRequests

Syntax

Counter32

Max-Access

read-only

Explanation

This variable is retrieved directly from the value for WRITE REQUESTS in V\$SYSSTAT. It records the number of write requests made to the host operating system.

Typical Range

0 - 4294967295; unlikely to increment at a rate greater than a few hundred per second

Significance

less important

Related Variables

oraDbSysPhysWrites

Suggested Presentation

counter

oraDbTablespaceTable

The oraDbTablespaceTable contains information on tablespaces within a current Oracle database instance. A tablespace is a logical portion of an Oracle database used to allocate storage for table and index data. In a production environment, tables can fill up as transaction activity mounts. Monitoring tablespace activity is important to avoid exhausting the tablespaces and causing spaces.

Each entry in the oraDbTablespaceTable represents a given tablespace within a current database instance. Each entry is indexed first by rdbmsDbIndex, and then oraDbTablespaceIndex; thus, there will normally be a one-to-many relationship between an rdbmsDbTable entry and corresponding oraDbTablespaceTable entries. (For details about rdbmsDbIndex, see Appendix D, “Interpreting Variables of the Public RDBMS MIB.”) The current value of each oraDbTablespaceTable variable is retrieved directly from a join of DBA_TABLESPACES, DBA_DATA_FILES, and DBA_FREE_SPACE selecting for the tablespace in question.

Table A-2 lists each of these variables and its corresponding object.

oraDbTablespaceIndex

Table A-2 *oraDbTablespaceTable Variables and Corresponding Object IDs.*

<i>Variable Name</i>	<i>Object ID</i>
oraDbTablespaceIndex	1.3.6.1.4.1.111.4.1.2.1.1
oraDbTablespaceName	1.3.6.1.4.1.111.4.1.2.1.2
oraDbTablespaceSizeAllocated	1.3.6.1.4.1.111.4.1.2.1.3
oraDbTablespaceSizeUsed	1.3.6.1.4.1.111.4.1.2.1.4
oraDbTablespaceState	1.3.6.1.4.1.111.4.1.2.1.5
oraDbTablespaceLargestAvailableChunk	1.3.6.1.4.1.111.4.1.2.1.6

Syntax

INTEGER (1..2147483647)

Max-Access

not-accessible

Explanation

A numeric index, unique among tablespaces within a single Oracle database instance. This index is assigned to these tablespaces based on the alphabetical order of their names. On most platforms, a hard file limit of 1023 database files exists, so this number is the practical upper limit. Although some administrators prefer a one-to-one relationship between tablespaces and database files, multiple files can comprise a tablespace.

Typical Range

1 - 1,000

Significance

very important

Related Variables

oraDbTablespaceName, rdbmsDbIndex

Suggested Presentation

not applicable

oraDbTablespaceName

Syntax

DisplayString

Max-Access

read-only

Explanation

Indicates the name of this tablespace, as retrieved from the value for TABLESPACE-NAME in DBA_TABLESPACES.

Typical Range

0 - 30 characters

Significance

important

Related Variables

oraDbTablespaceIndex

Suggested Presentation

simple string

oraDbTablespaceSizeAllocated**Syntax**

Integer32

Max-Access

read-only

Explanation

Indicates the amount of disk space (in kilobytes) allocated for this tablespace. This is the sum of the sizes of the data files associated with the tablespace.

Typical Range

0 - 10 gigabytes

Significance

important

Related Variables

oraDbTablespaceSizeUsed

Suggested Presentation

simple string

oraDbTablespaceSizeUsed**Syntax**

Integer32

Max-Access

read-only

Explanation

Indicates the amount of disk space (in kilobytes) which is actually in use for storing data. This is the difference between the sum of the size of the datafiles associated

with the tablespace and the sum of the size of the free spaces associated with the tablespace.

Typical Range

0 - value of oraDbTablespaceSizeAllocated

Significance

Very important

Related Variables

oraDbTablespaceSizeAllocated

Suggested Presentation

gauge

oraDbTablespaceState

Syntax

INTEGER (1) online (2) offline, or (3) invalid

Max-Access

read-only

Explanation

Indicates the current accessibility of this tablespace, as retrieved from the value for STATUS in DBA_TABLESPACES. If a tablespace is offline (2), then SQL statements cannot reference objects contained in the tablespace. An invalid (3) tablespace is one that has been dropped.

Typical Range

enumerated 1 - 3

Significance

very important

Related Variables

none

Suggested Presentation

simple string or icon

oraDbTablespaceLargestAvailableChunk

Syntax

Integer32

Max-Access

read-only

Explanation

Indicates the size (in kilobytes) of the largest contiguous set of free data blocks in the tablespace. This variable is retrieved directly from the value for NEXT_EXTENT in DBA_TABLES. If there is any object in the tablespace whose NEXT_EXTENT value is greater than the layout chunk, that object will be unable to expand. This might cause a major problem, or it might not matter.

Typical Range

Less than or equal to (oraDbTablespaceSizeAllocated minus oraDbTablespaceSizeUsed)

Significance

important

Related Variables

oraDbTablespaceSizeAllocated, oraDbTablespaceSizeUsed

Suggested Presentation

gauge

oraDbDataFileTable

oraDbDataFileTable contains information on the data files within a current database instance on the managed node. A data file denotes an area of disk allocated for database data. Monitoring data files is important for two reasons; first, to determine whether space in files is being exhausted, and second to determine O/S response time in accessing data on disk, especially on platforms where there is no other way to measure disk queue length.

Each entry in the oraDbDataFileTable represents a given data file within a current database instance on the node. Each entry is indexed first by rdbmsDbIndex, and then by oraDbDataFileIndex; thus, there will normally be a one-to-many relationship between an rdbmsDbTable entry and corresponding oraDbDataFileTable entries. (For details about rdbmsDbIndex, see Appendix E,

“Interpreting Variables of the Public RDBMS MIB.”) The current value of each oraDbDataFileTable variable is retrieved directly from a corresponding field in either V\$FILESTAT or DBA_DATA_FILES for that data file within that database instance.

Table A-3 lists each variable of the oraDbDataFileTable and its corresponding object ID

Table A-3 oraDbDataFileTable Variables and Corresponding Object IDs.

<i>Variable Name</i>	<i>Object ID</i>
oraDbDataFileIndex	1.3.6.1.4.1.111.4.1.3.1.1
oraDbDataFileName	1.3.6.1.4.1.111.4.1.3.1.2
oraDbDataFileSizeAllocated	1.3.6.1.4.1.111.4.1.3.1.3
oraDbDataFileDiskReads	1.3.6.1.4.1.111.4.1.3.1.4
oraDbDataFileDiskWrites	1.3.6.1.4.1.111.4.1.3.1.5
oraDbDataFileDiskReadBlocks	1.3.6.1.4.1.111.4.1.3.1.6
oraDbDataFileDiskWrittenBlocks	1.3.6.1.4.1.111.4.1.3.1.7
oraDbDataFileDiskReadTimeTicks	1.3.6.1.4.1.111.4.1.3.1.8
oraDbDataFileDiskWriteTimeTicks	1.3.6.1.4.1.111.4.1.3.1.9

oraDbDataFileIndex

Syntax

INTEGER (1..214748364)

Max-Access

not-accessible

Explanation

A numeric index, unique among data files associated with a single tablespace. The value of oraDbDataFileIndex is retrieved directly from the value of FILE_ID in DBA_DATA_FILES. For a small database, a tablespace typically contains 1 data file;

for a large database (80 Gbytes), a tablespace typically contains 200 datafiles in a tablespace. The upper limit is hard coded as 1023.

Typical Range

1 - 400

Significance

very important

Related Variables

rdbmsDbIndex

Suggested Presentation

not applicable

oraDbDataFileName

Syntax

DisplayString

Max-Access

read-only

Explanation

Indicates the fully-qualified name of this data file. The value is retrieved from the value of FILE_NAME in DBA_DATA_FILES.

Typical Range

10 - 100 characters; about 15 for raw partitions.

Significance

important

Related Variables

oraDbTablespaceName, because the file is a member of a tablespace.

Suggested Presentation

simple string

oraDbDataFileSizeAllocated

Syntax

Integer32

Max-Access

read-only

Explanation

Indicates the allocated size (in kilobytes) of this data file, as retrieved from the value of BYTES in DBA_DATA_FILES. Indicates how much space has been used so far. Monitoring this variable is very important, because running out of space can require taking the database down, depending on which table this file supports. Normally, however, adding another data file to the Tablespace solves the problem.

Typical Range

100 Mbytes - 2 Gbytes

Significance

very important

Related Variables

none

Suggested Presentation

simple string

oraDbDataFileDiskReads

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the total number of reads issued against this data file since database instance startup, as retrieved from the value of PHYRDS in V\$FILESTAT.

Typical Range

10,000 - 100,000 or much more, depending on the life of the instance

Significance
less important

Related Variables
oraDbDataFileDiskReadBlocks, oraDbDataFileDiskReadTimeTicks

Suggested Presentation
counter

oraDbDataFileDiskWrites

Syntax
Counter32

Max-Access
read-only

Explanation
Indicates the total number of writes issued against this data file since database instance startup, as retrieved from the value of PHYWRTS in V\$FILESTAT.

Typical Range
10,000 - 100,000 or much more, depending on the life of the instance

Significance
less important

Related Variables
oraDbDataFileDiskWriteBlocks, oraDbDataFileDiskWriteTimeTicks

Suggested Presentation
counter

oraDbDataFileDiskReadBlocks

Syntax
Counter32

Max-Access
read-only

Explanation

Indicates the total number of physical blocks read from this data file since database instance startup. The value is retrieved from the value of PHYBLKRD in V\$FILESTAT. The number of bytes read can be determined by multiplying this value by the value of oraDbConfigDbBlockSize, typically 2Kbytes.

Typical Range

10,000 - 100,000 or much more, depending on the life of the instance

Significance

important

Related Variables

oraDbConfigDbBlockSize, oraDbDataFileDiskReads

Suggested Presentation

counter

oraDbDataFileDiskWrittenBlocks

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the total number of physical blocks written to this data file since database instance startup. The value is retrieved from the value of PHYBLKWRT in V\$FILESTAT. The number of bytes written can be determined by multiplying this value by the value of the INIT.ORA parameter, DB_BLOCK_SIZE, typically 2Kbytes.

Typical Range

10,000 - 100,000 or much more, depending on the life of the instance

Significance

important

Related Variables

oraDbDataFileDiskWrites

Suggested Presentation

counter

oraDbDataFileDiskReadTimeTicks**Syntax**

Counter32

Max-Access

read-only

Explanation

Indicates the time spent writing to this data file since database instance startup IF the INIT.ORA parameter TIMED_STATISTICS is TRUE. (The unit of measurement on a UNIX platform is time ticks of 10 ms.) If TIMED_STATISTICS is FALSE, then a value of 0 is returned. The value of oraDbDataFileDiskReadTimeTicks is retrieved from the value of READTIM in V\$FILESTAT.

Because knowing how long it takes to perform I/O per block is the important statistic, knowing this aggregate measure is not very significant. If the average time to do reads is generally exceeding a couple of ticks, then an I/O subsystem response time problem exists. Most high performance disk drives can easily locate any sector on the disk in 10 ms.

Typical Range

0 - 4294967295

Significance

less important

Related Variables

oraDbDataFileDiskReads

Suggested Presentation

clock

oraDbDataFileDiskWriteTimeTicks**Syntax**

Counter32

Max-Access

read-only

Explanation

Indicates the time spent writing to this data file since database instance startup IF the INIT.ORA parameter TIMED_STATISTICS is TRUE. (The unit of measurement on a UNIX platform is time ticks of 10 ms.) If TIMED_STATISTICS is FALSE, then a value of 0 is returned. The value of oraDbDataFileDiskWriteTimeTicks is retrieved from the value of WRITETIM in V\$FILESTAT.

Because knowing how long it takes to perform I/O per block is the important statistic, knowing this aggregate measure is not very significant. If the average time to do writes is generally exceeding three ticks on non-mirrored data, then an I/O subsystem response time problem exists. Most high performance disk drives can easily perform a write in 15 ms.

Typical Range

Can wrap around the upper limit of 2147483647 in about three days of continuous instance operation for a busy database

Significance

less important

Related Variables

oraDbDataFileDiskWrites

Suggested Presentation

clock

oraDbLibraryCacheTable

The oraDbLibraryCacheTable contains variables measuring library cache activity since the most recent database instance startup. A library cache is a memory structure containing shared SQL and PL/SQL areas. Monitoring the library cache is important to determine whether it is necessary to resize Oracle's shared pool.

Each entry in the oraDbLibraryCacheTable represents a given library cache within a current database instance on the node. Each entry is indexed first by rdbmsDbIndex, and then by oraDbLibraryCacheIndex; thus, there will normally be a one-to-many relationship between an rdbmsDbTable entry and corresponding oraDbLibraryCacheTable entries. (For details about rdbmsDbIndex, see Appendix E, "Interpreting Variables of the Public RDBMS MIB.") The current value of each

oraDbLibraryCacheTable variable is retrieved directly from a corresponding field in the V\$LIBRARYCACHE table for that library cache within that database instance.

Table A-4 lists each variable of the oraDbLibraryCacheTable and its corresponding object ID.

Table A-4 oraDbLibraryCacheTable Variables and Corresponding Object IDs

Variable Name	Object ID
oraDbLibraryCacheIndex	1.3.6.1.4.1.111.4.1.4.1.1
oraDbLibraryCacheNameSpace	1.3.6.1.4.1.111.4.1.4.1.2
oraDbLibraryCacheGets	1.3.6.1.4.1.111.4.1.4.1.3
oraDbLibraryCacheGetHits	1.3.6.1.4.1.111.4.1.4.1.4
oraDbLibraryCachePins	1.3.6.1.4.1.111.4.1.4.1.5
oraDbLibraryCachePinHits	1.3.6.1.4.1.111.4.1.4.1.6
oraDbLibraryCacheReloads	1.3.6.1.4.1.111.4.1.4.1.7
oraDbLibraryCacheInvalidations	1.3.6.1.4.1.111.4.1.4.1.8

oraDbLibraryCacheIndex

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

A unique integer for each row of the oraDbLibraryCacheTable.

Typical Range

8 (only)

Significance

very important

Related Variables

oraDbLibraryCacheNameSpace

Suggested Presentation

not applicable

oraDbLibraryCacheNameSpace

Syntax

DisplayString

Max-Access

read-only

Explanation

Indicates the namespace of the V\$LIBRARYCACHE table to which this row is related. The value is retrieved from the value of NAMESPACE in V\$LIBRARYCACHE.

Typical Range

0 - 30 characters

Significance

important

Related Variables

oraDbLibraryCacheIndex

Suggested Presentation

simple string

oraDbLibraryCacheGets

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of times, since database instance startup, that the system requests handles to library objects in this namespace. The value of oraDbLibraryCacheGets is retrieved from the value of GETS in V\$LIBRARYCACHE.

Typical Range

0 - 500,00 per day

Significance

important

Related Variables

oraDbLibraryCacheGetHits

Suggested Presentation

counter

oraDbLibraryCacheGetHits

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of times, since database instance startup, that the handles are already allocated in the cache. The value of oraDbLibraryCacheGetHits is retrieved from the value of GETHITS in V\$LIBRARYCACHE.

Typical Range

0 - 4294967295

Significance

less important

Related Variables

oraDbLibraryCacheGets

Suggested Presentation

counter

oraDbLibraryCachePins

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of times, since database instance startup, that the system issues pin requests in order to access objects in the cache. The value of oraDbLibraryCachePins is retrieved from the value of PINS in V\$LIBRARYCACHE.

oraDbLibraryCachePins is used to calculate the following database instance performance ratio: library cache miss ratio.

Typical Range

0 - 4294967295

Significance

less important

Related Variables

oraDbLibraryPinHits, oraDbLibraryCacheReloads

Suggested Presentation

counter

oraDbLibraryCachePinHits

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of times, since database instance startup, that the objects the system is pinning are already allocated and initialized in the cache. The value of oraDbLibraryCachePinHits is retrieved from the value of PINHITS in V\$LIBRARYCACHE.

Typical Range

0 - 4294967295

Significance

important

Related Variables

oraDbLibraryCachePins

Suggested Presentation

counter

oraDbLibraryCacheReloads

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of times, since database instance startup, that library objects have to be reinitialized and reloaded with data because they have been aged out or invalidated. The value of oraDbLibraryCacheReloads is retrieved from the value of RELOADS in V\$LIBRARYCACHE.

oraDbLibraryCacheReloads is used to calculate the following database instance performance ratio: library cache miss ratio.

Typical Range

0 - 4294967295

Significance

important

Related Variables

oraDbLibraryCachePins

Suggested Presentation

counter

oraDbLibraryCacheInvalidations

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of times, since database instance startup, that non-persistent library objects (like shared SQL areas) have been invalidated. The value of oraDbLibraryCacheInvalidations is retrieved from the value of INVALIDATIONS in V\$LIBRARYCACHE.

Typical Range

0 - 4294967295

Significance

less important

Related Variables

none

Suggested Presentation

counter

oraDbLibraryCacheSumTable

The LibraryCacheSum table tracks for all library caches in a database instance as a whole the same information that the LibraryCache table tracks for the caches individually. It is primarily a convenience.

Table A-5 oraDbLibraryCacheSum Table Variables and Corresponding Object IDs

Variable Name	Object ID
oraDbLibraryCacheSumGets	1.3.6.1.4.1.111.4.1.5.1.1
oraDbLibraryCacheSumGetHits	1.3.6.1.4.1.111.4.1.5.1.2
oraDbLibraryCacheSumPins	1.3.6.1.4.1.111.4.1.5.1.3
oraDbLibraryCacheSumPinHits	1.3.6.1.4.1.111.4.1.5.1.4
oraDbLibraryCacheSumReloads	1.3.6.1.4.1.111.4.1.5.1.5
oraDbLibraryCacheSumInvalidations	1.3.6.1.4.1.111.4.1.5.1.6

oraDbLibraryCacheSumGets

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of times, since database instance startup, that the system requests handles to library objects in this namespace. The value of oraDbLibraryCacheSumGets is derived from the value of GETS in V\$LIBRARYCACHE.

Typical Range

0 - 500,00 per day

Significance

important

Related Variables

oraDbLibraryCacheSumGetHits

Suggested Presentation

counter

oraDbLibraryCacheSumGetHits

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of times, since database instance startup, that the handles are already allocated in the cache. The value of oraDbLibraryCacheSumGetHits is derived from the value of GETHITS in V\$LIBRARYCACHE.

Typical Range

0 - 4294967295

Significance

less important

Related Variables

oraDbLibraryCacheSumGets

Suggested Presentation

counter

oraDbLibraryCacheSumPins

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of times, since database instance startup, that the system issues pin requests in order to access objects in the cache. The value of oraDbLibraryCacheSumPins is derived from the value of PINS in V\$LIBRARYCACHE.

oraDbLibraryCacheSumPins is used to calculate the following database instance performance ratio: library cache miss ratio.

Typical Range

0 - 4294967295

Significance

less important

Related Variables

oraDbLibraryPinHits, oraDbLibraryCacheSumReloads

Suggested Presentation

counter

oraDbLibraryCacheSumPinHits

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of times, since database instance startup, that the objects the system is pinning are already allocated and initialized in the cache. The value of oraDbLibraryCacheSumPinHits is derived from the value of PINHITS in V\$LIBRARYCACHE.

Typical Range

0 - 4294967295

Significance

important

Related Variables

oraDbLibraryCacheSumPins

Suggested Presentation

counter

oraDbLibraryCacheSumReloads

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of times, since database instance startup, that library objects have to be reinitialized and reloaded with data because they have been aged out or invalidated. The value of oraDbLibraryCacheSumReloads is derived from the value of RELOADS in V\$LIBRARYCACHE.

oraDbLibraryCacheSumReloads is used to calculate the following database instance performance ratio: library cache miss ratio.

Typical Range

0 - 4294967295

Significance

important

Related Variables

oraDbLibraryCacheSumPins

Suggested Presentation

counter

oraDbLibraryCacheSumInvalidations

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of times, since database instance startup, that non-persistent library objects (like shared SQL areas) have been invalidated. The value of oraDbLibraryCacheSumInvalidations is derived from the value of INVALIDATIONS in V\$LIBRARYCACHE.

Typical Range

0 - 4294967295

Significance

less important

Related Variables

none

Suggested Presentation

counter

oraDbSGATable

The oraDbSGATable contains storage allocation information on the current System Global Area (SGA). The SGA is a common database storage area for information that supports current sessions. As the values of its attributes are configured in the INIT.ORA file, they do not change while the database instance is running, thus, the SGA at this aggregate level is not as important to monitor as other database structures.

Each entry in the oraDbSGATable represents the SGA for a current database instance on the node. Each entry is indexed by rdbmsDbIndex. However, because rdbmsDbTable contains an entry for each installed database configured for SNMP support, whether or not it is actively open, there may or may not be a one-to-one correspondence between entries in the two tables at any point in time. (For details about rdbmsDbIndex, see Appendix D, “Interpreting Variables of the Public RDBMS MIB.”) The current value of each oraDbSGATable variable is retrieved directly from a corresponding field in the V\$SGA table for that database instance.

Table A-6 lists each variable of the oraDbSGATable and its corresponding object ID.

Table A-6 oraDbSGATable Variables and Corresponding Object IDs

Variable Name	Object ID
oraDbSGAFixedSize	1.3.6.1.4.1.111.4.1.6.1.1
oraDbSGAVariableSize	1.3.6.1.4.1.111.4.1.6.1.2
oraDbSGADatabaseBuffers	1.3.6.1.4.1.111.4.1.6.1.3
oraDbSGARedoBuffers	1.3.6.1.4.1.111.4.1.6.1.4

oraDbSGAFixedSize

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

The size in kilobytes of the fixed-size portion of the SGA as shown in V\$SGASTAT.

Typical Range

1 - 2147483647

Significance

less important

Related Variables

oraDbSGAVariableSize

Suggested Presentation
as a simple integer value

oraDbSGAVariableSize

Syntax
INTEGER (1..2147483647)

Max-Access
read-only

Explanation
The size in kilobytes of the variable-size portion of the SGA as shown in V\$SGASTAT.

Typical Range
1 - 2147483647

Significance
less important

Related Variables
oraDbSGAFixedSize

Suggested Presentation
as a simple integer value

oraDbSGADatabaseBuffers

Syntax
INTEGER (1..2147483647)

Max-Access
read-only

Explanation
The number of database buffers allocated in the SGA as shown in V\$SGASTAT.

Typical Range
4 Kbytes - 2 Gbytes

Significance
less important

Related Variables
oraDbSGARedoBuffers

Suggested Presentation
as a simple integer value

oraDbSGARedoBuffers

Syntax
INTEGER (1..2147483647)

Max-Access
read-write

Explanation
The number of redo buffers allocated in the SGA as shown in V\$SGASTAT.

Typical Range
1 - 2147483647

Significance
less important

Related Variables
oraDbSGADatabaseBuffers

Suggested Presentation
as a simple integer value

oraDbConfigTable

The oraDbConfigTable contains variables whose values are retrieved directly from the V\$PARAMETER table. These parameters control systemwide resources and can impact the values of variables in the rest of this MIB. This table includes those initialization parameters that closely relate to the task of monitoring database instance performance. By assigning these parameters easy-to-use, fixed object IDs, it is easier to graph them together with the dynamic performance values they impact.

For more information on these parameters, see the *ORACLE Server Reference*, and also the *ORACLE Server Concepts Manual* specific to your system.

Each entry in the oraDbConfigTable is indexed by rdbmsDbIndex. However, because rdbmsDbTable contains an entry for each installed database, whether or not it is actively open, there may or may not be a one-to-one correspondence between entries in the two tables at any point in time. (For details about rdbmsDbIndex, see Appendix D, “Interpreting Variables of the Public RDBMS MIB.”)

Table A-7 lists each variable of the oraDbConfigTable and its corresponding object ID

Table A-7 oraDbConfigTable Variables and Corresponding Object IDs

Variable Name	Object ID
oraDbConfigDbBlockBuffers	1.3.6.1.4.1.111.4.1.7.1.1
oraDbConfigDbBlockCkptBatch	1.3.6.1.4.1.111.4.1.7.1.2
oraDbConfigDbBlockSize	1.3.6.1.4.1.111.4.1.7.1.3
oraDbConfigDbFileSimWrites	1.3.6.1.4.1.111.4.1.7.1.4
oraDbConfigDbMultiBlockReadCount	1.3.6.1.4.1.111.4.1.7.1.5
oraDbConfigDbWriters	1.3.6.1.4.1.111.4.1.7.1.6
oraDbConfigDistLockTimeout	1.3.6.1.4.1.111.4.1.7.1.7
oraDbConfigDistRecoveryConnectHold	1.3.6.1.4.1.111.4.1.7.1.8
oraDbConfigDistTransactions	1.3.6.1.4.1.111.4.1.7.1.9
oraDbConfigLogArchiveBufferSize	1.3.6.1.4.1.111.4.1.7.1.10
oraDbConfigLogArchiveBuffers	1.3.6.1.4.1.111.4.1.7.1.11
oraDbConfigLogBuffer	1.3.6.1.4.1.111.4.1.7.1.12
oraDbConfigLogCheckpointInteval	1.3.6.1.4.1.111.4.1.7.1.13
oraDbConfigLogCheckpointTimeout	1.3.6.1.4.1.111.4.1.7.1.14
oraDbConfigLogFiles	1.3.6.1.4.1.111.4.1.7.1.15
oraDbConfigLogSmallEntryMax	1.3.6.1.4.1.111.4.1.7.1.16
oraDbConfigMaxRollbackSegments	1.3.6.1.4.1.111.4.1.7.1.17
oraDbConfigMaxDispatchers	1.3.6.1.4.1.111.4.1.7.1.18
oraDbConfigMTSMAServers	1.3.6.1.4.1.111.4.1.7.1.19

Table A-7 oraDbConfigTable Variables and Corresponding Object IDs

Variable Name	Object ID
oraDbConfigMTSServers	1.3.6.1.4.1.111.4.1.7.1.20
oraDbConfigOpenCursors	1.3.6.1.4.1.111.4.1.7.1.21
oraDbConfigOpenLinks	1.3.6.1.4.1.111.4.1.7.1.22
oraDbConfigOptimizerMode	1.3.6.1.4.1.111.4.1.7.1.23
oraDbConfigProcesses	1.3.6.1.4.1.111.4.1.7.1.24
oraDbConfigSerializable	1.3.6.1.4.1.111.4.1.7.1.25
oraDbConfigSessions	1.3.6.1.4.1.111.4.1.7.1.26
oraDbConfigSharedPool	1.3.6.1.4.1.111.4.1.7.1.27
oraDbConfigSortAreaSize	1.3.6.1.4.1.111.4.1.7.1.28
oraDbConfigSortAreaRetainedSize	1.3.6.1.4.1.111.4.1.7.1.29
oraDbConfigTransactions	1.3.6.1.4.1.111.4.1.7.1.30
oraDbConfigTransactionsPerRollback	1.3.6.1.4.1.111.4.1.7.1.31

oraDbConfigDbBlockBuffers

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the DB_BLOCK_BUFFERS parameter of the INIT.ORA file. Indicates the number of database blocks cached in memory of the SGA. This parameter is the most significant determinant of the SGA size and database instance performance. The size of each block can be determined using oraDbConfigDbBlockSize.

Typical Range

1 - 2147483647

Significance

very important

Related Variables

oraDbConfigDbBlockSize

Suggested Presentation

gauge or simple string

oraDbConfigDbBlockCkptBatch

Syntax

INTEGER (0..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the DB_BLOCK_CHECKPOINT_BATCH parameter of the INIT.ORA file. Indicates the maximum number of blocks that the DBWR process will write in one batch devoted to checkpoints.

Typical Range

0 - 2147483647

Significance

less important

Related Variables

none

Suggested Presentation

gauge or simple string

oraDbConfigDbBlockSize

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the DB_BLOCK_SIZE parameter of the INIT.ORA file. Indicates the size, in bytes, of database blocks for this database. This information has significance for a number of other variables.

Typical Range

1024 - 8192 (O/S dependent)

Significance

important

Related Variables

none

Suggested Presentation

gauge or simple string

oraDbConfigDbFileSimWrites

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the DB_FILE_SIMULTANEOUS_WRITES parameter of the INIT.ORA file. Indicates the number of simultaneous writes (batches) for each database file when written by DBWR.

Typical Range

1 - 2147483647

Significance

less important

Related Variables

none

Suggested Presentation

gauge or simple string

oraDbConfigDbMultiBlockReadCount

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the DB_FILE_MULTIBLOCK_READ_COUNT parameter of the INIT.ORA file. Indicates the maximum number of blocks read in one I/O operation during a sequential scan. The default is a function of the DB_BLOCK_BUFFERS and PROCESSES parameters in the INIT.ORA file.

Typical Range

Values in the range of 4 to 32 are reasonable. Actual maximums vary by operating system

Significance

important

Related Variables

oraDbConfigDbBlockBuffers, oraDbConfigDbProcesses

Suggested Presentation

gauge or simple string

oraDbConfigDistLockTimeout

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the DISTRIBUTED_LOCK_TIMEOUT parameter of the INIT.ORA file. Indicates the amount of time (in seconds) that distributed transactions must wait for locked resources.

Typical Range

1 - 2147483647

Significance

important

Related Variables

none

Suggested Presentation

clock or simple string

oraDbConfigDistRecoveryConnectHold**Syntax**

INTEGER (0..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the DISTRIBUTED_RECOVERY_CONNECTION_HOLD_TIME parameter of the INIT.ORA file. Indicates the length of time (in seconds) to hold a remote connection open after a distributed transaction fails, in hopes that communication will be restored without having to reestablish the connection. Any value above 1800 means the connection never closes.

Typical Range

1 - 1800

Significance

important

Related Variables

none

Suggested Presentation

clock or simple string

oraDbConfigDistTransactions**Syntax**

INTEGER (0..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the DISTRIBUTED_TRANSACTIONS parameter of the INIT.ORA file. Indicates the maximum number of distributed transactions in which this database can concurrently participate.

Typical Range

0 - 2147483647

Significance

none

Related Variables

oraDbConfigDistTransactions

Suggested Presentation

gauge or simple string

oraDbConfigLogArchiveBufferSize

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the LOG_ARCHIVE_BUFFER_SIZE parameter of the INIT.ORA file. Indicates the size of each archival buffer, in redo log blocks (operating system blocks). The default should be adequate for most applications.

Typical Range

1 - 2147483647

Significance

less important

Related Variables

oraDbConfigLogArchiveBuffers, oraDbConfigLogBuffer

Suggested Presentation

gauge or simple string

oraDbConfigLogArchiveBuffers**Syntax**

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the LOG_ARCHIVE_BUFFERS parameter from the INIT.ORA file. Indicates the number of buffers allocated for archiving.

Typical Range

1 - 2147483647

Significance

important

Related Variables

oraDbConfigLogArchiveBufferSize, oraDbConfigLogBuffer

Suggested Presentation

gauge or simple string

oraDbConfigLogBuffer**Syntax**

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the LOG_BUFFER parameter of the INIT.ORA file. Indicates the number of bytes allocated to the redo log buffer in the SGA. In a busy system, a value of 65536 or higher would not be unreasonable.

Typical Range

1,000 - 100,000

Significance

important

Related Variables

oraDbConfigLogArchiveBuffers, oraDbConfigLogArchiveBufferSize

Suggested Presentation

gauge or simple string

oraDbConfigLogCheckpointInterval

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the LOG_CHECKPOINT_INTERVAL parameter of the INIT.ORA file. Indicates the amount of time (in seconds) to pass before another checkpoint occurs. A value of 0 disables time-based checkpoints.

Typical Range

1 - 2147483647

Significance

important

Related Variables

oraDbConfigLogCheckpointTimeout

Suggested Presentation

clock or simple string

oraDbConfigLogCheckpointTimeout

Syntax

INTEGER (0..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the LOG_CHECKPOINT_TIMEOUT parameter of the INIT.ORA file. The amount of time (in seconds) to pass between checkpoints. A value of 0 disables time-based checkpoints.

Typical Range

0 - 2147483647

Significance

important

Related Variables

oraDbConfigLogCheckpointInterval

Suggested Presentation

clock or simple string

oraDbConfigLogFiles

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the LOG_FILES parameter of the INIT.ORA file. Indicates the maximum log group number. This value specifies the maximum number of redo log files that can be opened at database instance run time.

Typical Range

1 - 2147483647

Significance

important

Related Variables

none

Suggested Presentation

gauge or simple string

oraDbConfigMaxRollbackSegments

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the MAX_ROLLBACK_SEGMENTS parameter of the INIT.ORA file. Indicates the maximum size of the rollback segment cache in the SGA.

Typical Range

1 - 65536

Significance

important

Related Variables

none

Suggested Presentation

gauge or simple string

oraDbConfigMTSMaxDispatchers

Syntax

INTEGER (1..2147483647)

Explanation

The value of this variable is retrieved directly from the MTS_MAX_DISPATCHERS parameter of the INIT.ORA file. Indicates the maximum number of dispatcher processes allowed to be running simultaneously.

Typical Range

1 - 2147483647

Significance

important

Related Variables

none

Suggested Presentation

gauge or simple string

oraDbConfigMTSMaxServers**Syntax**

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the MTS_MAX_SERVERS parameter of the INIT.ORA file. Indicates the maximum number of shared server processes allowed to be running simultaneously.

Typical Range

1 - 2147483647

Significance

important

Related Variables

none

Suggested Presentation

gauge or simple string

oraDbConfigMTSServers**Syntax**

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the MTS_SERVERS parameter of the INIT.ORA file. Indicates the number of server processes that are created when an instance is started.

Typical Range

1 - 2147483647

Significance

important

Related Variables

none

Suggested Presentation

gauge or simple string

oraDbConfigOpenCursors

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the OPEN_CURSORS parameter of the INIT.ORA file. Indicates the maximum number of open cursors (context areas) a single-user process can have at once.

Typical Range

1 - 2147483647

Significance

important

Related Variables

none

Suggested Presentation

gauge or simple string

oraDbConfigOpenLinks

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the OPEN_LINKS parameter of the INIT.ORA file. Indicates the maximum number of concurrent open connections to remote database instances per user process. This parameter refers only to connections used for distributed transactions; direct connections to a remote database instance specified as an application connects are not counted. If set to 0, then no distributed transactions are allowed.

Typical Range

0 - 255

Significance

important

Related Variables

none

Suggested Presentation

gauge or simple string

oraDbConfigOptimizerMode

Syntax

DisplayString

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the OPTIMIZER_MODE parameter of the INIT.ORA file. When set to RULE, this parameter causes rule-based optimization to be used, unless hints are specified in the query. When set to COST, the optimizer uses a cost-based approach for an SQL statement, if there are

statistics in the dictionary for at least one table accessed in the statement.
(Otherwise, the rule-based approach is used.)

Typical Range

RULE/COST

Significance

important

Related Variables

oraDbConfigSessions

Suggested Presentation

icon or simple string

oraDbConfigProcesses

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the PROCESSES parameter of the INIT.ORA file. For a multiple-process operation, this parameter specifies the maximum number of user processes that can simultaneously connect to an Oracle server. The PROCESSES parameter is used to derive the SESSIONS INIT.ORA parameter. The default is 50.

Typical Range

6 - O/S dependent

Significance

important

Related Variables

oraDbConfigSessions, oraDbConfigTransactions

Suggested Presentation

gauge or simple string

Suggested Presentation

gauge or simple string

oraDbConfigSerializable**Syntax**

TruthValue

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the SERIALIZABLE parameter of the INIT.ORA file. A value of TRUE indicates that queries acquire table-level read locks, preventing any update of objects read until the transaction containing the query is committed.

Typical Range

true/false

Significance

important

Related Variables

none

Suggested Presentation

icon or simple string

oraDbConfigSessions**Syntax**

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the SESSIONS parameter of the INIT.ORA file. Indicates the total number of user and system sessions. The default

for parameter is derived as the value of the INIT.ORA PROCESSES parameter multiplied by 1.1.

Typical Range

1 - 2147483647

Significance

important

Related Variables

oraDbConfigProcesses

Suggested Presentation

gauge or simple string

oraDbConfigSharedPool

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the SHARED_POOL_SIZE parameter of the INIT.ORA file. Indicates the size (in bytes) of the shared pool. The shared pool contains shared cursors and stored procedures. The default is 3.5 Mbytes.

Typical Range

300 Kbytes - O/S dependent

Significance

important

Related Variables

none

Suggested Presentation

gauge or simple string

oraDbConfigSortAreaSize

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the SORT_AREA_SIZE parameter of the INIT.ORA file. Indicates the maximum amount of PGA memory to use for an external (disk) sort (in bytes). The default (O/S dependent) is adequate for most DB operations.

Typical Range

1 - 2147483647

Significance

none

Related Variables

oraDbConfigRetainedSize, oraDbConfigSortSpaceMapSize

Suggested Presentation

gauge or simple string

oraDbConfigSortAreaRetainedSize

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the SORT_AREA_RETAINED_SIZE parameter of the INIT.ORA file. Indicates the maximum amount of session memory (in bytes) that will be used for an in-memory sort. The default value is equal to that assigned for the SORT_AREA_SIZE INIT.ORA parameter.

Typical Range

0..value of oraDbConfigSortAreaSize

Significance

important

Related Variables

oraConfigSortAreaSize

Suggested Presentation

gauge or simple string

oraDbConfigTransactions

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the TRANSACTIONS parameter of the INIT.ORA file. Indicates the maximum number of concurrent transactions. The default is the value of the PROCESSES INIT.ORA parameter multiplied by 1.1.

Typical Range

1 - 2147483647

Significance

important

Related Variables

oraDbConfigProcesses

Suggested Presentation

gauge or simple string

oraDbConfigTransactionsPerRollback

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

The value of this variable is retrieved directly from the TRANSACTIONS_PER_ROLLBACK_SEGMENT parameter of the INIT.ORA file. Indicates the number of concurrent transactions allowed per rollback segment. The default is 30.

Typical Range

1..O/S dependent

Significance

important

Related Variables

oraDbConfigTransactions

Suggested Presentation

gauge or simple string

oraRepTable

The oraRep Table contains general information about the replicated schemas in the current database. Besides providing a count of the number of schemas being replicated to remote sites, it reports problems with the current node. These problems include the inability to propagate or receive replicated data.

Table A–8 oraRep Table Variables and Corresponding Object IDs

Variable Name	Object ID
oraRepPending2PhaseCommits	1.3.6.1.4.1.111.4.3.1.1.1
oraRepDisabledTriggers	1.3.6.1.4.1.111.4.3.1.1.2
oraRepInvalidPackages	1.3.6.1.4.1.111.4.3.1.1.3
oraRepSchemas	1.3.6.1.4.1.111.4.3.1.1.4

oraRepPending2PhaseCommits

Syntax

Gauge32

Max-Access

read-only

Explanation

This indicates the number of failed distributed transactions in a PREPARED state. Used for monitoring configurations where databases are communicating synchronously.

Typical Range

0

Significance

This indicates the number of distributed transactions that remain unresolved because of a failure during the commit process. It can help measure the impact of failures.

Related Variables

oraRepLinkErrors

Suggested Presentation

error indicator

oraRepDisabledTriggers

Syntax

INTEGER32

Max-Access

read-only

Explanation

This indicates the number of replication triggers that have been disabled. As triggers are the mechanism by which local changes are propagated to remote databases, disabled replication triggers cause databases in the replicating environment to go out of sync.

Typical Range

0

Significance

Changes applied to replicated tables with a disabled replication trigger will not be propagated to remote sites.

Related Variables

oraRepInvalidPackages

Suggested Presentation

guage or error indicator (if >0)

oraRepInvalidPackages

Syntax

INTEGER32

Max-Access

read-only

Explanation

This indicates the number of replication packages that have been invalidated. As these packages are the mechanism by which remote changes are propagated to the local database, invalidated replication packages cause databases in the replication environment to go out of sync.

Typical Range

0

Significance

Invalid replication packages may cause transactions to build up in the error queue.

Related Variables

oraRepDisabledTriggers

Suggested Presentation

guage or error indicator (if >0)

oraRepSchemas

Syntax

INTEGER32

Max-Access

read-only

Explanation

This indicates the number of schemas at the local node that are involved in replication.

Typical Range

configuration dependent

Significance

The number of database schema involved in replication at the local site.

Related Variables

oraRepSchemaName

Suggested Presentation

gauge or simple string

oraRepSchemaTable

The oraRepSchema Table contains information about the replicated database schemas at the current site. For each such replicated schema, there exists one instance of this table.

The values of these variables are retrieved directly from the replication catalog. The current replication environment's status (normal, quiescing, quiesced) and configuration (type of replication site and database link to remote replication sites) are useful for displaying a visual representation of the replication environment.

Table A-9 oraRepSchema Table Variables and Corresponding Object IDs

Variable Name	Object ID
oraRepSchemaIndex	1.3.6.1.4.1.111.4.3.2.1.1
oraRepSchemaName	1.3.6.1.4.1.111.4.3.2.1.2
oraRepSchemaType	1.3.6.1.4.1.111.4.3.2.1.3
oraRepSchemaStatus	1.3.6.1.4.1.111.4.3.2.1.4
oraRepSchemaLinks	1.3.6.1.4.1.111.4.3.2.1.5

oraRepSchemaIndex

Syntax

INTEGER32

Max-Access

read-only

Explanation

This is a numeric index unique among replication schemas contained in this database.

Typical Range

not applicable

Significance

Provides a unique identifier for the schema.

Related Variables

none

Suggested Presentation

simple string

oraRepSchemaName

Syntax

DisplayString

Max-Access

read-only

Explanation

This is the name of the replicated schema. This name must be the same at all sites involved in the replication of the schema.

Typical Range

valid Oracle identifier

Significance

Identifies replicated schemas. Useful in displaying a visual representation of the replication environment.

Related Variables

oraRepSchemaType

Suggested Presentation

simple string

oraRepSchemaType

Syntax

INTEGER{masterdef(1), master(2), snapshot(3)}

Max-Access

read-only

Explanation

This indicates whether the replicated schema is a master definition schema, a master schema, or a snapshot schema.

Typical Range

not applicable

Significance

Most replication administration tasks can be performed only at the master definition sites.

Related Variables

oraRepSchemaName

Suggested Presentation

color indicator or simple string

oraRepSchemaStatus

Syntax

INTEGER{normal(1), quiescing(2), quiesced(3)}

Max-Access

read-only

Explanation

This indicates the state of the replicated schema. Replication activity is suspended in the quiesced state and the schema can then be altered.

Typical Range

1 - 3

Significance

The meanings of the values are as follows:

3. Normal operational state of a replication environment.
4. Replication activity is in the process of being suspended
5. Replication activity has been disabled. This is usually done to perform administrative actions.

Snapshot sites are always in state 1 (normal).

Related Variables

oraRepSchemaType

Suggested Presentation

color indicator or simple string

oraRepSchemaLinks

Syntax

INTEGER32

Max-Access

read-only

Explanation

This indicates the number of database links used in the schema for replication.

Typical Range

configuration dependent

Significance

For masters there must be at least one database link from the local site to each remote master.

For snapshots there must be at least one database link from the snapshot site to its master.

Related Variables

oraRepLinkName

Suggested Presentation

simple string

oraRepMasterSchema Table

The oraRepMasterSchema Table contains specific information for replicated schemas at the current master or master definition site. There exists one instance of this table for each replicated schema at the current site. These values are retrieved from the replication catalog.

The values in this table are useful for displaying a visual representation of multi-master configurations. Master and master definition sites are not required to have database links to their snapshot sites. Snapshot schemas are currently not registered in the replication catalog at their associated master site. Given an oraRepMasterSchema Table in an arbitrary replication environment, it is not possible to locate all snapshot sites based solely on the information in this table.

Information is also provided for the detection of replication administration request errors and a relative count of the number of conflicts encountered at the current site. The table provides a count of the number of resolved conflicts. Not all conflicts may be resolved (the DBA did not declare the appropriate conflict resolution method(s) or a conflict was unable to be resolved due to other problems.

Table A-10 oraRepMasterSchema Table Variables and Corresponding Object IDs

Variable Name	Object ID
oraRepMasterSchemaRequestErrors	1.3.6.1.4.1.111.4.3.3.1.1
oraRepMasterSchemaResolvedConflicts	1.3.6.1.4.1.111.4.3.3.1.2
oraRepMasterSchemaOtherMasters	1.3.6.1.4.1.111.4.3.3.1.3

oraRepMasterSchemaRequestErrors

Syntax

Gauge32

Max-Access

read-only

Explanation

This indicates the number of administration requests that have encountered errors. The errors themselves are stored in the administration queue at the source database of the request.

Typical Range

0

Significance

If the variable is > 0 , then 1 or more administration commands failed at 1 or more remote sites.

Related Variables

oraRepLinkAdminRequests

Suggested Presentation

gauge or warning indicator

oraRepMasterSchemaResolvedConflicts

Syntax

Gauge32

Max-Access

read-only

Explanation

This indicates the number of conflicts that were successfully resolved at the local database. For this variable to be valid, the DBA must activate statistics collection for conflict resolution.

Typical Range

configuration dependent

Significance

If the environment is configured to be conflict-free, this value always should be 0. Otherwise, this value gives the administrator a rough count of the conflicts that are occurring, although it is imprecise because it does not include any conflicts that have not been resolved.

Related Variables

none

Suggested Presentation

gauge or simple string

oraRepMasterSchemaOtherMasters

Syntax

INTEGER32

Max-Access

read-only

Explanation

This indicates the number of remote master databases involved in the replication of the schema.

Typical Range

configuration dependent

Significance

useful for displaying a map of the replication environment.

Related Variables

oraRepSchemaLinks

Suggested Presentation

simple string

oraRepSnapshotSchemaTable

The oraRepSnapshotSchema Table contains specific information for snapshot schemas at the current snapshot site. One instance of this table exists for each snapshot schema at the current site. These values are retrieved from the replication catalog.

The values in this table are useful for displaying a visual representation of Master-Snapshot configurations. Snapshot sites are required to have database links to their master sites, but a master site is not required to have database links to its associated snapshot sites.

Table A-11 oraRepSnapshotSchema Table Variables and Corresponding Object IDs

Variable Name	Object ID
oraRepSnapshotSchemaMaster	1.3.6.1.4.1.111.4.3.4.1.1
oraRepSnapshotSchemaSnapshots	1.3.6.1.4.1.111.4.3.4.1.2

oraRepSnapshotSchemaMaster

Syntax

DisplayString

Max-Access

read-only

Explanation

This provides the name of the master database from which the snapshot schema is refreshed. A snapshot schema can be owned by only one master database at a time, but that ownership is dynamic.

Typical Range

valid Oracle identifier

Significance

useful for displaying a map of the replication environment.

Related Variables

oraRepLinkName

Suggested Presentation

simple string

oraRepSnapshotSchemaSnapshots

Syntax

INTEGER32

Max-Access

read-only

Explanation

This indicates the number of snapshots in the schema.

Typical Range

configuration dependent

Significance

Useful in displaying a visual representation of the replication environment.

Related Variables**Suggested Presentation**

gauge or simple string

oraRepLinkTable

The oraRepLink Table contains information for each database link used for replication at the current site. One instance of this table exists for each database link used for replication at the current site. These values are retrieved from both the replication catalog and the Deferred RPC tables.

All information is reported on a per-database link basis. For example, oraRepLinkError counts all errors from the database link oraRepLinkName within the instance of the oraRepLink Table that identifies that link. This is also true for oraRepLinkDeferredTransactions and oraRepLinkAdminRequests.

Administration requests are only made from the master definition sites to remote master sites. Snapshot sites neither send nor receive replication administration requests.

Table A-12 oraRepLink Table Variables and Corresponding Object IDs

Variable Name	Object ID
oraRepLinkIndex	1.3.6.1.4.1.111.4.3.5.1.1
oraRepLinkName	1.3.6.1.4.1.111.4.3.5.1.2
oraRepLinkDeferredTransactions	1.3.6.1.4.1.111.4.3.5.1.3
oraRepLinkErrors	1.3.6.1.4.1.111.4.3.5.1.4
oraRepLinkAdminRequests	1.3.6.1.4.1.111.4.3.5.1.5

oraRepLinkIndex

Syntax

INTEGER32

Max-Access

read-only

Explanation

This is a numeric index whose value is unique among the replication links associated with a particular schema.

Typical Range

not applicable

Significance

This provides a unique identifier for the link.

Related Variables

none

Suggested Presentation

simple string

oraRepLinkName

Syntax

DisplayString

Max-Access

read-only

Explanation

This provides the name of the database link.

Typical Range

valid Oracle database link name

Significance

This shows the destination to which transactions will be replicated.

Related Variables

none

Suggested Presentation

simple string

oraRepLinkDeferredTransactions

Syntax

Gauge32

Max-Access

read-only

Explanation

This is the number of deferred transactions queued for propagation to the destination of the dblink. The transactions in the queue are stored, organized by destination, at the database originating the transaction.

Typical Range

configuration dependent

Significance

As a general rule, there should not be a large backlog of queued transactions. A moderate queue size reduces potential problems with conflicts, integrity constraints, and cascading errors. This value is one measure of the cost of replication in terms of data traffic.

Related Variables

none

Suggested Presentation

gauge or simple string

oraRepLinkErrors

Syntax

Gauge32

Max-Access

read-only

Explanation

This is the number of errors at the local database that were caused by deferred transactions from the dblink in question. These errors are caused by incorrectly formed transactions or by conflicts. The errors in the queue are stored by source at the database at which the errors occurred.

Typical Range

0

Significance

Errors indicate unresolved conflicts or other problems with the replication environment (for example, replication users do not have the correct privileges or the database links were not created correctly).

Related Variables

none

Suggested Presentation

gauge or warning indicator

oraRepLinkAdminRequests

Syntax

Gauge32

Max-Access

read-only

Explanation

This is the number of administration requests queued for the local database from the dblink in question. The items in the queue are stored by the source of the requests.

Typical Range

configuration dependent

Significance

A large backlog of requests may indicate a problem in the background process which periodically pushes the queue. A gauge would be useful for displaying the percent completion of a single or of a set of administration requests (i.e., when the value reaches zero, all requests are complete)

Related Variables

none

Suggested Presentation

gauge or simple string

Interpreting Variables of the Oracle Network Listener MIB

This appendix provides information to help you interpret individual variables in the private Oracle Network Listener MIB. Specifically, it includes sections covering MIB variables in the following tables

- oraListenerTable
- oraSIDTable
- oraDedicatedSrvTable
- oraDispatcherTable
- oraPrespawndSrvTable
- oraListenAddressTable
- oraListenerTraps

For more information about the Oracle network listener, see *Understanding SQLNet*.

oraListenerTable

The oraListenerTable contains information about the generic network listeners installed on a managed node. A network listener is a server process that listens for connection requests for one or more databases on one or more network protocols. Monitoring a listener is important in order to ensure adequate database access.

Each entry in the oraListenerTable represents the network listener for a current database instance on the node. Each entry is indexed by oraListenerIndex. The current value of each oraListenerTable variable is retrieved from either configuration files or calculated from an internal buffer of the managed listener.

Table B-1 lists the variables included in the oraListenerTable.

Table B-1 oraListenerTable Variables and Corresponding Object IDs

Variable Name	Object ID
oraListenerIndex	1.3.6.1.4.1.111.5.1.1.1.1
oraListenerName	1.3.6.1.4.1.111.5.1.1.1.2
oraListenerVersion	1.3.6.1.4.1.111.5.1.1.1.3
oraListenerStartDate	1.3.6.1.4.1.111.5.1.1.1.4
oraListenerUptime	1.3.6.1.4.1.111.5.1.1.1.5
oraListenerTraceLevel	1.3.6.1.4.1.111.5.1.1.1.6
oraListenerSecurityLevel	1.3.6.1.4.1.111.5.1.1.1.7
oraListenerParameterFile	1.3.6.1.4.1.111.5.1.1.1.8
oraListenerLogFile	1.3.6.1.4.1.111.5.1.1.1.9
oraListenerTraceFile	1.3.6.1.4.1.111.5.1.1.1.10
oraListenerState	1.3.6.1.4.1.111.5.1.1.1.11
oraListenerNumberOfServices	1.3.6.1.4.1.111.5.1.1.1.12
oraListenerContact	1.3.6.1.4.1.111.5.1.1.1.13

A description of each of these variables follows.

oraListenerIndex

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

A numeric index, unique among all generic listeners on this managed node, as retrieved from the `snmp.index.listener-name` parameter of the `SNMP.ORA` configuration file. `oraListenerIndex` also serves as the primary index for the `oraListenAddressTable`.

Typical Range

varies, depending on the value set in the `snmp.index.listener-name` field of the `SNMP.ORA` file

Significance

very important

Related Variables

`oraListenAddress`

Suggested Presentation

not applicable

oraListenerName

Syntax

`DisplayString`

Max-Access

read-only

Explanation

Indicates the name of this generic listener, as retrieved from the `LISTENER.ORA` configuration file.

Typical Range

1 - 255 characters

Significance

very important

Related Variables

none

Suggested Presentation

icon or simple string

oraListenerVersion

Syntax

`DisplayString`

Max-Access

read-only

Explanation

Indicates the version number of this generic listener, in vendor-specific format. This value is retrieved from an internal listener table.

Typical Range

30 - 50 characters (physical limit is 255 characters)

Significance

less important

Related Variables

none

Suggested Presentation

simple string

oraListenerStartDate

Syntax

DisplayString

Max-Access

read-only

Explanation

Indicates the date and time at which this generic listener was started, as retrieved from an internal listener table. The format is *date-month-year hours:minutes:seconds*.

Typical Range

15 - 20 characters (physical limit is 255 characters)

Significance

less important

Related Variables

none

Suggested Presentation

simple string

oraListenerUptime

Syntax

TimeTicks

Max-Access

read-only

Explanation

Indicates the value of sysUpTime at the time the generic listener was started. This value is derived from the master agent, which counts the time in hundredths of a second since the master agent was started. The value of this variable should remain as a constant across the Listener's life span. A change in this variable indicates that the counter has been refreshed.

Typical Range

0 - 4249467295

Significance

important

Related Variables

none

Suggested Presentation

clock

oraListenerTraceLevel

Syntax

INTEGER (1 - 17)

Max-Access

read-write

Explanation

Indicates the level at which a Listener should be traced. A value of 4 means that tracing at the USER level is turned on; and 6 means that tracing at the ADMIN level is turned on. A value of 17 means that tracing is turned off.

Typical Range

enumerated 1 - 17

Significance

important

Related Variables

oraNavigatorTraceFile

Suggested Presentation

as an icon, or as a simple string of characters, OFF, USER or ADMIN

oraListenerSecurityLevel

Syntax

INTEGER (1) on, or (2) off.

Max-Access

read-only

Explanation

Indicates whether or not the generic listener is password-protected, as determined from the `PASSWORDS_listener_name` parameter of the `LISTENER.ORA` configuration file. If security is ON (1), the password is required to perform certain DBA tasks against the Listener using the Listener control utility.

Typical Range

enumerated 1 or 2

Significance

less important

Related Variables

none

Suggested Presentation

simple string

oraListenerParameterFile

Syntax

DisplayString

Max-Access

read-only

Explanation

Indicates the name of the Listener configuration file on the managed node, as retrieved from an internal buffer of the managed listener. Default is \$ORACLE_HOME/network/admin/*listener_name*.ORA

Typical Range

40 - 70 characters (physical limit is 255 characters)

Significance

important

Related Variables

none

Suggested Presentation

simple string

oraListenerLogFile

Syntax

DisplayString

Max-Access

read-only

Explanation

Indicates the directory for the log file that is automatically generated for listener events, as retrieved from the LOG_DIRECTORY parameter of the LISTENER.ORA configuration file. Default is operating system specific: on UNIX, for example, it is \$ORACLE_HOME/network/log/*listener_name*.log.

Typical Range

20 - 70 characters (physical limit is 255 characters)

Significance

less important

Related Variables

none

Suggested Presentation

simple string

oraListenerTraceFile

Syntax

DisplayString

Max-Access

read-only

Explanation

Indicates the name of the file to which trace information is written, as determined from the TRACE_FILE parameter of the LISTENER.ORA configuration file. Default is \$ORACLE_HOME/network/trace/*listener_name*.trc

Typical Range

20 - 70 characters (physical limit is 255 characters)

Significance

less important

Related Variables

oraListenerTraceLevel

Suggested Presentation

simple string

oraListenerState

Syntax

INTEGER (1) up, or (2) down

Max-Access

read-only

Explanation

Indicates the current state of the generic listener, as retrieved from an internal table. The DOWN value (2) indicates that the generic listener is not available for any use, but is known to the agent. The UP value (1) indicates that the generic listener is running and available for generic use. This value would be inspected by an agent on receipt of an oraListenerStateChange trap.

Typical Range

enumerated 1 or 2

Significance

important

Related Variables

oraListenerStateChange

Suggested Presentation

simple string or icon

oraListenerNumberOfServices**Syntax**

INTEGER (0..2147483647)

Max-Access

read-only

Explanation

Indicates the number of different types of services, dedicated server, dispatcher, or prespawnd shadow, configured with the listener:

Typical Range

1 - 25, depending on the configuration parameters

Significance

less important

Related Variables

none

Suggested Presentation

simple string

oraListenerContact**Syntax**

DisplayString

Max-Access

read-write

Explanation

Free-form text providing contact information for this managed listener, including name, telephone number, email address, for example. This value is retrieved from the `snmp.contact.listener_name` parameter of the SNMP.ORA configuration file.

Range

0 - 255 characters

Significance

less important

Related Variables

none

Suggested Presentation

simple string

oraSIDTable

The oraSIDTable contains information about the status of connections to a current database instance. This information is important to monitor in order to ensure that clients seeking access to a database have that opportunity.

Each entry in the oraSIDTable represents a current database instance for whom the listener listens. Each entry is indexed by oraSIDName.

Table B-2 lists the variables included in the oraSIDTable.

Table B-2 oraSIDTable Variables and Corresponding Object IDs

Variable Name	Object ID
oraSIDListenerIndex	1.3.6.1.4.1.111.5.1.5.1.1
oraSIDName	1.3.6.1.4.1.111.5.1.5.1.2
oraSIDCurrentConnectedClients	1.3.6.1.4.1.111.5.1.5.1.3
oraSIDReservedConnections	1.3.6.1.4.1.111.5.1.5.1.4

A description of each of these variables follows.

oraSIDListenerIndex

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

A numeric index, unique among all of the generic listeners on the managed node, that associates a listener with a database it listens on. This value is retrieved from the `snmp.index.listener_name` parameter of the SNMP.ORA configuration file.

Typical Range

varies, depending on the value set in the `snmp.index.listener-name` field of the SNMP.ORA configuration file

Significance

very important

Related Variables

oraListenerIndex

Suggested Presentation

not applicable

oraSIDName

Syntax

DisplayString

Max-Access

read-only

Explanation

A unique name identifying a database instance. This SID is in the definition of the listener, as retrieved from the `SID_NAME` parameter of the LISTENER.ORA configuration file. `oraSIDName` serves as the primary index in the `oraDedicatedSrvTable`, `oraDispatcherTable`, and `oraPrespawndSrvTable`; thus, an entry for any dispatcher, dedicated server or prespawnd server which listens for the database instance identified by `oraSIDName` can be found.

Typical Range

1 - 25 characters (physical limit is 255 characters)

Significance

very important

Related Variables

oraDedicatedSrvIndex, oraDispatcherIndex, oraPrespawndSrvIndex

Suggested Presentation

simple string or icon

oraSIDCurrentConnectedClients

Syntax

Gauge32

Max-Access

read-only

Explanation

Indicates the total number of clients currently connected through prespawnd shadows and dispatchers to this database instance, as retrieved from an internal Listener table. When the value of oraSIDCurrentConnectedClients is approaching the value of oraSIDReservedConnections, the number of connection requests to this database instance is reaching the threshold (the reserved number of connections for clients on this database instance).

When the value of oraSIDCurrentConnectedClients equals the value of oraSIDReservedConnections, the incoming connection requests are redirected to dedicated servers. This may not be desirable, as a dedicated server requires more system resources than does a dispatcher or prespawnd shadow.

Typical Range

0 - value of oraSIDReservedConnections

Significance

very important

Related Variables

oraDispatcherCurrentConnections, oraPrespawndSrvCurrentConnections

Suggested Presentation

gauge

oraSIDReservedConnections**Syntax**

Counter32

Max-Access

read-only

Explanation

Indicates the total number of reserved connections for clients through prespawnd shadows and dispatchers to this database instance.

Typical Range

0 - 1,000, depending on the number of dispatcher and prespawnd shadow processes for the database

Significance

very important

Related Variables

oraDispatcherMaximumConnections, oraSIDCurrentConnectedClients

Suggested Presentation

gauge

oraDedicatedSrvTable

The oraDedicatedSrvTable contains information about the dedicated servers provided by the managed listener. A dedicated server is a process that executes Oracle server code on behalf of a particular database user process. Monitoring a dedicated server is important in order to ensure that clients seeking access to a database have that opportunity.

Each entry in the oraDedicatedSrvTable represents a dedicated server associated with a current database instance on the managed node. Each entry is indexed first by oraSIDName, and then by oraDedicatedSrvIndex; thus, there can be a one-to-many relationship between a current database instance and the dedicated servers associated with it. By indexing first by oraSIDName, all dedicated servers associated with a given SID can be found using SNMP traversal operations

(get-next and get-bulk). The current value of each oraDedicatedSrvTable variable is retrieved from internal listener buffers.

Table B-3 lists the variables included in the oraDedicatedSrvTable.

Table B-3 oraDedicatedSrvTable Variables and Corresponding Object IDs

Variable Name	Object ID
oraDedicatedSrvIndex	1.3.6.1.4.1.111.5.1.2.1.1
oraDedicatedSrvEstablishedConnections	1.3.6.1.4.1.111.5.1.2.1.2
oraDedicatedSrvRejectedConnections	1.3.6.1.4.1.111.5.1.2.1.3

A description of each of these variables follows.

oraDedicatedSrvIndex

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

A numeric index, unique among all the dedicated servers, as retrieved from an internal listener table.

Typical Range

1 - 5, depending on the number of database instances for whom this listener listens

Significance

very important

Related Variables

oraSIDName

Suggested Presentation

not applicable

oraDedicatedSrvEstablishedConnections

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates how many incoming connection requests this dedicated server has accepted since startup of this managed listener, as retrieved from an internal listener table.

Typical Range

0 - 4249467295

Significance

very important

Related Variables

oraDedicatedSrvRejectedConnections, oraDispatcherRejectedConnections, oraPrespawndSrvRejectedConnections

Suggested Presentation

counter

oraDedicatedSrvRejectedConnections

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates how many incoming connection requests this dedicated server has rejected since startup of this managed listener, as retrieved from an internal listener table.

Typical Range

0 - 4249467295

Significance

very important

Related Variables

oraDedicatedSrvEstablishedConnections

Suggested Presentation

counter

oraDispatcherTable

The oraDispatcherTable contains information on the dispatchers provided by the managed listener. A dispatcher is an optional background process present only when a multi-threaded server configuration is used. Monitoring a dispatcher is important in order to ensure that clients seeking access to a database have that opportunity.

Each entry in the oraDispatcherTable represents a dispatcher associated with a current database instance. Each entry is indexed first by oraSIDName, and then by oraDispatcherIndex; thus, there can be a one-to-many relationship between a database instance and the dispatcher processes serving it. Using this indexing method, all dispatchers associated with a given SID can be found by SNMP traversal operations (get-next and get-bulk). The current value of most oraDispatcherTable variables is retrieved from internal listener tables.

Table B-4 lists the variables included in the oraDispatcherTable.

Table B-4 oraDispatcherTable Variables and Corresponding Object IDs

Variable Name	Object ID
oraDispatcherIndex	1.3.6.1.4.1.111.5.1.3.1.1
oraDispatcherEstablishedConnections	1.3.6.1.4.1.111.5.1.3.1.2
oraDispatcherRejectedConnections	1.3.6.1.4.1.111.5.1.3.1.3
oraDispatcherCurrentConnections	1.3.6.1.4.1.111.5.1.3.1.4
oraDispatcherMaximumConnections	1.3.6.1.4.1.111.5.1.3.1.5
oraDispatcherState	1.3.6.1.4.1.111.5.1.3.1.6
oraDispatcherProtocolInfo	1.3.6.1.4.1.111.5.1.3.1.7

A description of each of these variables follows.

OraDispatcherIndex

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

A numeric index, unique among all the dispatchers, as retrieved from an internal listener buffer.

Typical Range

1 - 5, depending on the number of dispatchers configured for the database instance

Significance

very important

Related Variables

none

Suggested Presentation

not applicable

oraDispatcherEstablishedConnections

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates how many incoming connection requests this dispatcher has accepted since startup of this managed listener, as retrieved from an internal listener buffer.

When the value of oraDispatcherEstablishedConnections approaches the value of oraDispatcherMaximumConnections, this dispatcher is reaching the threshold (the greatest number of connection requests that can be accepted).

Typical Range

0 - value of oraDispatcherMaximumConnections

Significance

very important

Related Variables

oraDedicatedSrvEstablishedConnections, oraDispatcherMaximumConnections, oraDispatcherRejectedConnections, oraPrespawndSrvEstablishedConnections

Suggested Presentation

counter

oraDispatcherRejectedConnections

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates how many incoming connection requests this dispatcher has rejected since startup of this managed listener, as retrieved from an internal listener table.

Typical Range

0 - 4249467295

Significance

very important

Related Variables

oraDedicatedSrvEstablishedConnections, oraDispatcherEstablishedConnections, oraDispatcherState, oraPrespawndSrvEstablishedConnections

Suggested Presentation

counter

oraDispatcherCurrentConnections

Syntax

Gauge32

Max-Access

read-only

Explanation

Indicates the number of connection requests this dispatcher is currently redirecting, as retrieved from an internal listener table. Monitoring oraDispatcherCurrentConnections and oraDispatcherMaximumConnections together indicates the load/activity of the dispatcher.

Typical Range

0 - oraDispatcherMaximumConnections

Significance

very important

Related Variables

oraSIDCurrentConnectedClients, oraDispatcherMaximumConnections

Suggested Presentation

gauge

oraDispatcherMaximumConnections

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

Indicates the greatest number of connection requests that this dispatcher can accept, as retrieved from an internal listener table.

Typical Range

0 - value of oraSIDReservedConnections

Significance

very important

Related Variables

oraDispatcherCurrentConnections, oraSIDReservedConnections

Suggested Presentation

gauge

oraDispatcherState

Syntax

INTEGER (1) blocked, or (2) ready.

Max-Access

read-only

Explanation

Indicates the current state of this dispatcher, as retrieved from an internal listener table. The BLOCKED value (1) indicates that the dispatcher is temporarily not accepting redirected connection requests. The READY value (2) indicates that this dispatcher is ready to accept any redirected connection requests.

Typical Range

enumerated 1 or 2

Significance

very important

Related Variables

oraDispatcherRejectedConnections

Suggested Presentation

icon or simple string

oraDispatcherProtocolInfo

Syntax

DisplayString

Max-Access

read-only

Explanation

Indicates the protocol for which this dispatcher listens, as well as protocol-specific information, as retrieved from the MTS_LISTENER_ADDRESS parameter of the INIT.ORA configuration file.

Typical Range

1 - 255 characters

Significance

important

Related Variables

none

Suggested Presentation

simple string or icon

oraPrespawndSrvTable

The oraPrespawndSrvTable contains information on the prespawnd servers provided by the managed listener associated with the current database instance. A prespawnd server is an optional shadow process created when the listener is started, and then available for making connections to the database. Prespawnd servers reduce connect time by eliminating the need to spawn a shadow for each new connect request. Monitoring a prespawnd server is important in order to ensure that clients seeking access to a database have that opportunity.

Each entry in the oraPrespawndSrvTable represents a prespawnd server associated with a current database instance. Each entry is indexed first by oraSIDName, and then by oraPrespawndSrvIndex; thus, there can be a one-to-many relationship between a database instance and the prespawnd servers serving it. Using this indexing method, all prespawnd servers associated with a given SID can be found by SNMP traversal operations (get-next and get-bulk). The current value of most oraPrespawndSrvTable variables is retrieved from internal listener buffers.

Table B-5 lists the variables included in the oraPrespawndSrvTable.

Table B-5 oraPrespawndSrvTable Variables and Corresponding Object IDs

Variable Name	Object ID
oraPrespawndSrvIndex	1.3.6.1.4.1.111.5.1.4.1.1
oraPrespawndSrvEstablishedConnections	1.3.6.1.4.1.111.5.1.4.1.2
oraPrespawndSrvRejectedConnections	1.3.6.1.4.1.111.5.1.4.1.3
oraPrespawndSrvCurrentConnections	1.3.6.1.4.1.111.5.1.4.1.4
oraPrespawndSrvMaximumConnections	1.3.6.1.4.1.111.5.1.4.1.5
oraPrespawndSrvState	1.3.6.1.4.1.111.5.1.4.1.6
oraPrespawndSrvProtocolInfo	1.3.6.1.4.1.111.5.1.4.1.7
oraPrespawndSrvProcessorID	1.3.6.1.4.1.111.5.1.4.1.8

A description of each of these variables follows.

oraPrespawndSrvIndex

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

A numeric index, unique among the prespawnd servers configured for this managed listener, as retrieved from an internal listener table.

Typical Range

1 - 1,000, depending on the number of prespawnd shadows configured

Significance

very important

Related Variables

none

Suggested Presentation

not applicable

oraPrespawnedSrvEstablishedConnections

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates how many incoming connection requests have been accepted by the prespawned server since its startup, as retrieved from an internal listener table.

Typical Range

0 - 4249467295

Significance

very important

Related Variables

none

Suggested Presentation

counter

oraPrespawnedSrvRejectedConnections

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of connection requests this prespawned server has rejected since its startup, as retrieved from an internal listener table. If the value of oraPrespawnedSrvRejectedConnections is creeping up, oraPrespawnedState should be monitored.

Typical Range

0 - 4249467295

Significance

very important

Related Variables

oraDedicatedSrvEstablishedConnections,
oraPrespawndSrvEstablishedConnections, oraPrespawndSrvState

Suggested Presentation

counter

oraPrespawndSrvCurrentConnections

Syntax

Gauge32

Max-Access

read-only

Explanation

Indicates how many incoming connection requests currently being redirected by the prespawnd server since startup of this managed listener, as retrieved from an internal listener table.

Typical Range

0 - 4249467295

Significance

very important

Related Variables

oraPrespawndSrvMaximumConnections

Suggested Presentation

gauge

oraPrespawndSrvMaximumConnections

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

Indicates the greatest number of connection requests that this prespawnd server can accept. The Listener updates this value in real time.

Typical Range

0 - 1,000, depending on the configuration

Significance

very important

Related Variables

oraPrespawndSrvCurrentConnections

Suggested Presentation

gauge

oraPrespawndSrvState

Syntax

INTEGER (1) blocked, or (2) ready.

Max-Access

read-only

Explanation

Indicates the current state of the prespawnd server, as retrieved from an internal listener table. The BLOCKED value (1) indicates that the prespawnd server is temporarily not accepting redirected connection requests. The READY option (2) indicates that the prespawnd server is ready to accept any redirected connection requests.

Typical Range

enumerated 1 or 2

Significance

very important

Related Variables

oraPrespawndSrvRejectedConnection

Suggested Presentation

alarm or icon

oraPrespawndSrvProtocolInfo

Syntax

DisplayString

Max-Access

read-only

Explanation

Indicates the protocol on which this prespawnd server listens, as well as protocol-specific information. This information is retrieved from an internal Listener table.

Typical Range

1 - 255 characters

Significance

important

Related Variables

none

Suggested Presentation

simple string or icon

oraPrespawndSrvProcessorID

Syntax

DisplayString

Max-Access

read-only

Explanation

Indicates the process ID of the prespawnd server, as retrieved from an internal listener table.

Typical Range

1 - 10, depending on the O/S (physical limit is 255 characters)

Significance

less important

Related Variables

none

Suggested Presentation

simple string

oraListenAddressTable

The oraListenAddressTable contains the addresses on which the listener is listening. These addresses are important to monitor when a Listener cannot come up during startup; these addresses can then be examined for the proper format.

Each entry in the oraListenAddressTable represents an address on which a given active listener is listening. Each entry is indexed first by oraListenerIndex, and then by oraListenAddressIndex; thus, there can be a one-to-many relationship between a listener and the addresses on which it is listening.

Table B-6 lists the variables included in the oraListenAddressTable.

Table B-6 oraListenAddressTable Variables and Corresponding Object IDs

Variable Name	Object ID
oraListenAddressIndex	1.3.6.1.4.1.111.5.1.6.1.1
oraListenAddress	1.3.6.1.4.1.111.5.1.6.1.2

A description of each of these variables follows.

oraListenAddressIndex

Syntax

INTEGER (1..2147483647)

Max-Access

read-only

Explanation

A numeric index, unique among all of the addresses on which the listener is listening, as retrieved from an internal listener table.

Typical Range

1 - 5, depending on configuration

Significance

important

Related Variables

oraListenAddress, oraListenIndex

Suggested Presentation

not applicable

oraListenAddress

Syntax

DisplayString

Max-Access

read-only

Explanation

Indicates an address on which this listener is listening, as retrieved from the ADDRESS section of the LISTENER.ORA configuration file.

Typical Range

1 - 255 characters

Significance

important

Related Variables

oraListenerIndex

Suggested Presentation

simple string

oraListenerTraps

Table B-7 lists the oraListenerTraps variable.

Table B-7 *oraListenerTraps Variable and Corresponding Object ID*

Variable Name	Object ID
oraListenerStateChange	1.3.6.1.4.1.111.5.2.1.1.1

A description of this variable follows.

oraListenerStateChange

Objects

{oraListenerState }

Explanation

Indicates that one of the listeners managed by this agent has changed its listenerState in a way that makes it less accessible for use.

Typical Range

2 (only)

Significance

very important

Related Variables

oraListenerState

Suggested Presentation

alarm

Interpreting Variables of the Oracle Names MIB

This appendix provides information to help you interpret the variables of the private Oracle Names MIB which are implemented in this release. Specifically, it includes sections covering SNMP variables in the following tables:

- oraNamesTNSTable
- oraNamesConfigTable
- oraNamesServerTable

For more information about the Oracle Names product, refer to the *Oracle Names Administrator's Guide*. For a listing of all variables in the Oracle Names MIB, including those not implemented in this release, see the MIB itself.

oraNamesTNSTable

The oraTNSTable contains variables which could be common to all applications running on SQL*Net. SQL*Net is Oracle's remote data access software that enables both client/server and server/server communications across any network. Monitoring these variables is useful in order to obtain basic (mostly static) information about the Oracle Names application.

Each entry in the oraNamesTNSTable represents a given active SQL*Net application located on the managed node. (In this case, that application is Oracle Names.) Each entry is indexed by applIndex. (For details about applIndex, see Appendix E, "Interpreting Implemented Variables of the Network Services MIB.") The current value of each oraNamesTNSTable variable is retrieved from an internal table or from a corresponding field in the NAMES.ORA configuration file on the managed node.

Appendix C–1 lists each of these variables and its corresponding object ID.

Table C–1 oraNamesTNSTable Variables and Corresponding Object IDs

Variable Name	Object ID
oraNamesTNSStartDate*	1.3.6.1.4.1.111.6.1.1.1.1
oraNamesTNSTraceLevel	1.3.6.1.4.1.111.6.1.1.1.2
oraNamesTNSSecurityLevel*	1.3.6.1.4.1.111.6.1.1.1.3
oraNamesTNSParameterFile	1.3.6.1.4.1.111.6.1.1.1.4
oraNamesTNSLogFile	1.3.6.1.4.1.111.6.1.1.1.5
oraNamesTNSTraceFile	1.3.6.1.4.1.111.6.1.1.1.6
oraNamesTNSState*	1.3.6.1.4.1.111.6.1.1.1.7
oraNamesTNSContact	1.3.6.1.4.1.111.6.1.1.1.8
oraNamesTNSListenAddresses*	1.3.6.1.4.1.111.6.1.1.1.9
oraNamesTNSFailedListenAddresses*	1.3.6.1.4.1.111.6.1.1.1.10
oraNamesTNSReload	1.3.6.1.4.1.111.6.1.1.1.11
oraNamesTNSRunningTime	1.3.6.1.4.1.111.6.1.1.1.12

* Variables marked with an asterisk are not supported.
Attempts to access these variables may result in errors.

A description of each of these variables follows.

oraNamesTNSTraceLevel

Syntax

Integer32

Max-Access

read-write

Explanation

Indicates the amount and granularity (if any) of trace messages the server writes to its trace file. The higher the number, the more verbose the tracing information. Enumerated levels include 4 (user) and 6 (admin) or 17 (off). The value of this variable is retrieved from the NAMES.TRACE_LEVEL field of the NAMES.ORA file.

Typical Range

enumerated 1 - 17

Significance

less important

Related Variables

oraNamesTNSTParameterFile, oraNamesTNSTraceFile

Suggested Presentation

simple string

oraNamesTNSTParameterFile

Syntax

DisplayString

Max-Access

read-write

Explanation

Indicates the name of the startup file containing all site-specific configuration/tuning settings for this server.

Typical Range

any legal filename

Significance

less important

Related Variables

oraNamesTNSTListenAddresses, oraNamesTNSTLogFile, oraNamesTNSTTraceFile, onsrTNSTTraceLevel

Suggested Presentation

simple string

oraNamesTNSTLogFile

Syntax

DisplayString

Max-Access

read-write

Explanation

Indicates the name of the file to which this server writes log information concerning normal events, errors, and possibly periodic statistical dumps.

Typical Range

any legal filename

Significance

less important

Related Variables

oraNamesTNSTParameterFile

Suggested Presentation

simple string

oraNamesTNSTraceFile

Syntax

DisplayString

Max-Access

read-write

Explanation

Indicates the name of the file to which this server writes trace information when tracing is enabled. Such trace information includes internal details about this server's operation, for use in solving operational problems.

Typical Range

any legal filename

Significance

less important

Related Variables

oraNamesTNSTParameterFile, oraNamesTNSTraceLevel

Suggested Presentation

simple string

oraNamesTNSContact**Syntax**

DisplayString

Max-Access

read-only

Explanation

Indicates the person to contact regarding the operation or administration of this server, together with information on how to contact this person.

Typical Range

0 - 255 characters

Significance

less important

Related Variables

oraNamesTNSState

Suggested Presentation

simple string

oraNamesTNSReload**Syntax**

TimeTicks

Max-Access

read-write

Explanation

Indicates the amount of time (in centiseconds) until this server reloads. This variable can be used to automatically reload this server or show when reload will occur. Reloading enables the server to reread parameter files, network definitions, and reset statistics, for example. When set to 0, the server reloads immediately.

Typical Range

0 - 4294967296 centiseconds

Significance

less important

Related Variables

oraNamesConfigTable, oraNamesTNSRunningTime, oraNamesTNSState

Suggested Presentation

stopwatch

oraNamesTNSRunningTime

Syntax

Integer32

Max-Access

read-only

Explanation

Indicates the amount of time (in seconds) that the server has been running. This variable can be used as a statistical baseline for evaluating counters and running averages.

Typical Range

0 - 2147483647

Significance

very important

Related Variables

oraNamesServerTable variables

Suggested Presentation

stopwatch

oraNamesConfigTable

The oraNamesConfigTable contains information on those Oracle Names server configuration parameters that are not included in the oraNamesTNSTable.

Monitoring this information is important in order to characterize the operation of the Oracle Names server.

Each entry in the oraNamesConfigTable represents a given active SQL*Net application on the node. Each entry is indexed by applIndex. (For details about applIndex, see Appendix E, “Interpreting Implemented Variables of the Network Services MIB.”) The current value of each oraNamesConfigTable variable is retrieved directly from a corresponding field in the NAMES.ORA configuration file on the managed node.

Table C-2 lists each of the variables implemented in this release, together with its corresponding object ID.

Table C-2 oraNamesConfigTable Variables and Corresponding Object IDs

Variable Name	Object ID
oraNamesConfigAdminRegion	1.3.6.1.4.1.111.6.1.2.1.1
oraNamesConfigAuthorityRequired	1.3.6.1.4.1.111.6.1.2.1.2
oraNamesConfigAutoRefreshExpire	1.3.6.1.4.1.111.6.1.2.1.3
oraNamesConfigAutoRefreshRetry	1.3.6.1.4.1.111.6.1.2.1.4
oraNamesConfigCacheCheckpointFile	1.3.6.1.4.1.111.6.1.2.1.5
oraNamesConfigCacheCheckpointInterval	1.3.6.1.4.1.111.6.1.2.1.6
oraNamesConfigConfigCheckpointFile*	1.3.6.1.4.1.111.6.1.2.1.7
oraNamesConfigDefaultForwarders*	1.3.6.1.4.1.111.6.1.2.1.8
oraNamesConfigDefaultForwardersOnly	1.3.6.1.4.1.111.6.1.2.1.9
oraNamesConfigDomainCheckpointFile*	1.3.6.1.4.1.111.6.1.2.1.10
oraNamesConfigDomainHints*	1.3.6.1.4.1.111.6.1.2.1.11
oraNamesConfigDomains*	1.3.6.1.4.1.111.6.1.2.1.12
oraNamesConfigForwarding-Available	1.3.6.1.4.1.111.6.1.2.1.13
oraNamesConfigForwardingDesired	1.3.6.1.4.1.111.6.1.2.1.14
oraNamesConfigLogDirectory*	1.3.6.1.4.1.111.6.1.2.1.15
oraNamesConfigLogStatsInterval	1.3.6.1.4.1.111.6.1.2.1.16
oraNamesConfigLogUnique*	1.3.6.1.4.1.111.6.1.2.1.17
oraNamesConfigMaxOpenConnections*	1.3.6.1.4.1.111.6.1.2.1.18
oraNamesConfigMaxReforwards	1.3.6.1.4.1.111.6.1.2.1.19

Table C-2 oraNamesConfigTable Variables and Corresponding Object IDs

Variable Name	Object ID
oraNamesConfigMessagePool-StartSize*	1.3.6.1.4.1.111.6.1.2.1.20
oraNamesConfigNoModifyRequests	1.3.6.1.4.1.111.6.1.2.1.21
oraNamesConfigNoRegionDatabase*	1.3.6.1.4.1.111.6.1.2.1.22
oraNamesConfigResetStatsInterval	1.3.6.1.4.1.111.6.1.2.1.23
oraNamesConfigServerName	1.3.6.1.4.1.111.6.1.2.1.24
oraNamesConfigTopologyCheckpointFile*	1.3.6.1.4.1.111.6.1.2.1.25
oraNamesConfigTraceDirectory*	1.3.6.1.4.1.111.6.1.2.1.26
oraNamesConfigTraceFunc*	1.3.6.1.4.1.111.6.1.2.1.27
oraNamesConfigTraceMask*	1.3.6.1.4.1.111.6.1.2.1.28
oraNamesConfigTraceUnique*	1.3.6.1.4.1.111.6.1.2.1.29

* Variables marked with an asterisk are not supported.
Attempts to access these variables may result in errors.

A description of each of these variables follows.

oraNamesConfigAdminRegion

Syntax

DisplayString

Max-Access

read-write

Explanation

Indicates the name of the Administrative Region which this server serves. Identifies which area of the namespace is the responsibility of this server and the location of the network definition for the region.

Typical Range

any valid region name

Significance

important

Related Variables

none

Suggested Presentation

simple string

oraNamesConfigAuthorityRequired**Syntax**

TruthValue

Max-Access

read-write

Explanation

TRUE indicates that this server requires an authoritative answer to system query requests that it generates. FALSE results in faster, but less reliable answers to the server's inquiries. Requests with Authority Required cannot be answered by a non-authoritative server out of its cache.

Typical Range

true/false

Significance

less important

Related Variables

oraNamesConfigDomainHints, oraNamesConfigDomains

Suggested Presentation

simple string

oraNamesConfigAutoRefreshExpire**Syntax**

TimeTicks

Max-Access

read-write

Explanation

A running Oracle Names server periodically checks its network definition to see if it has been updated. If a check fails, the Oracle Names server retries for the period of time set in `AutoRefreshExpire`. In this case, the server continues operation using its current network definition, until it finds it needs to update. The default is 72 hours.

Typical Range

1 minute - ~ 3 months

Significance

less important

Related Variables

`oraNamesConfigAutoRefreshRetry`, `oraNamesConfigAdminRegion`,
`oraNamesTNSParameterFile`

Suggested Presentation

date/time countdown with knob adjuster, or hourglass with slide adjuster

oraNamesConfigAutoRefreshRetry

Syntax

TimeTicks

Max-Access

read-write

Explanation

A running Oracle Names server periodically checks its network definition to see if it has been updated. If a check fails, the Oracle Names server retries with the frequency set in `AutoRefreshRetry`. In this case, the server continues operation using its current network definition, until it finds it needs to update. The default is three minutes.

Typical Range

1 minute - 10 hours

Significance

less important

Related Variables

oraNamesConfigAutoRefreshExpire, oraNamesConfigAdminRegion, oraNamesTNSParameterFile

Suggested Presentation

knob or slide (a reostat, for example)

oraNamesConfigCacheCheckpointFile

Syntax

DisplayString

Max-Access

read-write

Explanation

The Oracle Names server periodically writes its cache to disk and then reads the cache on startup. The value of oraNamesConfigCacheCheckpointFile is the filename of the file to which this cache is written. Any data in this file which is still valid (positive time to live) is retained when the new server is started up.

Typical Range

any legal filename

Significance

less important

Related Variables

none

Suggested Presentation

simple string

oraNamesConfigCacheCheckpointInterval

Syntax

TimeTicks

Max-Access

read-write

Explanation

Indicates the amount of time between cache checkpoints. If the value of `oraNamesConfigCacheCheckpointInterval` is greater than 0, the server writes its cache at the specified frequency. When the server is started again, any foreign data in the cache which is still valid (positive time to live) will be retained. If set to 0 (the default), then checkpointing is disabled, and any foreign data is lost when the server is stopped.

Typical Range

0 - 3 days

Significance

less important

Related Variables

`oraNamesConfigCacheCheckpointFile`, `oraNamesTNSParameterFile`

Suggested Presentation

simple string

oraNamesConfigDefaultForwardersOnly

Syntax

TruthValue

Max-Access

read-write

Explanation

TRUE indicates that this server is to operate in DEFAULT-FORWARDERS-ONLY mode. A server in this mode must have at least one default forwarder. The server then operates in slave mode, forwarding all foreign requests to at least one default forwarder, whether or not it has server information that might be more accurate. This feature provides for administrative optimization, by presuming that a high percentage of foreign requests are for names in the vicinity of the `DefaultForwarders`.

FALSE indicates that the server operates normally, that is, foreign requests are passed to subdomain servers if the name should reside there, or to the root.

Typical Range

true/false

Significance
less important

Related Variables
oraNamesConfigDefaultForwarders, oraNamesTNSParameterFile

Suggested Presentation
simple string

oraNamesConfigForwardingAvailable

Syntax
TruthValue

Max-Access
read-write

Explanation
Servers that do not forward will not handle the request for clients, but may refer them to other regions. Referral is only possible when the requestor is another names server; regular clients cannot handle referrals. Servers that do not forward cut their work in half (at the expense of the requestor) by "staying out of the middle." FALSE is the default, and is only intended for regions which have no domain data, typically the root domain. TRUE indicates that this server is willing to forward requests for data for which it is not authoritative.

Typical Range
true/false

Significance
important

Related Variables
oraNamesTNSParameterFile

Suggested Presentation
simple string

oraNamesConfigForwardingDesired

Syntax

TruthValue

Max-Access

read-write

Explanation

TRUE indicates that this server desires other servers to forward requests which this server generates on its own. Requests which this server forwards have Forwarding Desired set by the original requestor. This server can reduce its load by a factor of the number of hops to an authoritative server if the intermediate servers are willing to forward the request, rather than refer the requestor to the next-nearest server.

Typical Range

true/false

Significance

less important

Related Variables

oraNamesTNSParameterFile

Suggested Presentation

simple string

oraNamesConfigLogStatsInterval

Syntax

TimeTicks

Max-Access

read-write

Explanation

Indicates the interval (in centiseconds) at which server statistic counters (a subset of Oracle Names MIB variables) are written to the log file. The default is 0, indicating that no variables are logged.

Typical Range

0 - 1 day

Significance
less important

Related Variables
oraNamesTNSLogFile, oraNamesTNSParameterFile

Suggested Presentation
simple string

oraNamesConfigMaxReforwards

Syntax
Integer32

Max-Access
read-write

Explanation
The server keeps a count of the number of times a given forwarded query returns with a referral to a closer name server. When the number of referrals exceeds oraNamesConfigMaxReforwards, the query is cancelled and an error is returned to the requestor. Higher settings make the server more persistent in resolving failed queries; lower settings will save the server time and reduce traffic (probably trivial).

Typical Range
1 - 15

Significance
less important

Related Variables
oraNamesTNSParameterFile

Suggested Presentation
simple string

oraNamesConfigNoModifyRequests

Syntax
TruthValue

Max-Access

read-write

Explanation

When this value is set "ON", the server refuses any requests to modify its region data.

Typical Range

true or false

Significance

Less important. Not relevant to version 2.2 of Oracle Names. When insert, update, and delete support are added in subsequent versions, this variable will enable and disable the modification of region data.

Related Variables

oraTNSParameterFile

Suggested Presentation

simple string

oraNamesConfigResetStatsInterval

Syntax

TimeTicks

Max-Access

read-write

Explanation

Indicates the interval (in centiseconds) at which all server statistic counters are reset back to zero. This parameter enables administrators to automatically reset all MIB statistics at a specified frequency without disrupting the operation of the server. If set to 0, statistics are never reset.

Typical Range

0 or 10 - 4294967295 centiseconds

Significance

less important

Related Variables

oraNamesConfigLogStatsInterval, oraNamesTNSParameterFile

Suggested Presentation

simple string

oraNamesConfigServerName

Syntax

DisplayString

Max-Access

read-only

Explanation

Indicates this server's name, as defined in the Network definition. Every service has a unique domain-qualified name.

Typical Range

any valid service name

Significance

important

Related Variables

oraNamesTNSParameterFile

Suggested Presentation

simple string

oraNamesServerTable

The oraNamesServerTable contains variables which describe the current operational status of the Oracle Names server. Monitoring these measures is important to ensure that the server is up and fully functional.

Each entry in the oraNamesServerTable represents a given active Oracle Name Resolution Server on the node. Each entry is indexed by applIndex. (For details about applIndex, see Appendix E, "Interpreting Implemented Variables of the Network Services MIB.") The current value of each oraNamesServerTable variable is retrieved from internal tables of this Oracle Names server.

Table C-3 lists each of the variables implemented in this release, together with its corresponding object ID.

Table C-3 oraNamesServerTable Variables and Corresponding Object IDs

Variable Name	Object ID
oraNamesServerQueriesReceived	1.3.6.1.4.1.111.6.1.3.1.1
oraNamesServerLastNnamesNotFound*	1.3.6.1.4.1.111.6.1.3.1.2
oraNamesServerQueriesTotalTime	1.3.6.1.4.1.111.6.1.3.1.3
oraNamesServerDeletesReceived*	1.3.6.1.4.1.111.6.1.3.1.4
oraNamesServerDeletesRefused*	1.3.6.1.4.1.111.6.1.3.1.5
oraNamesServerDeletesTotalTime*	1.3.6.1.4.1.111.6.1.3.1.6
oraNamesServerRenamesReceived*	1.3.6.1.4.1.111.6.1.3.1.7
oraNamesServerRenamesRefused*	1.3.6.1.4.1.111.6.1.3.1.8
oraNamesServerRenamesTotalTime*	1.3.6.1.4.1.111.6.1.3.1.9
oraNamesServerUpdatesReceived*	1.3.6.1.4.1.111.6.1.3.1.10
oraNamesServerUpdatesRefused*	1.3.6.1.4.1.111.6.1.3.1.11
oraNamesServerUpdatesTotalTime*	1.3.6.1.4.1.111.6.1.3.1.12
oraNamesServerCorruptMessagesReceived	1.3.6.1.4.1.111.6.1.3.1.13
oraNamesServerResponsesSent	1.3.6.1.4.1.111.6.1.3.1.14
oraNamesServerErrorResponsesSent*	1.3.6.1.4.1.111.6.1.3.1.15
oraNamesServerAliasLoopsDetected	1.3.6.1.4.1.111.6.1.3.1.16
oraNamesServerLookupsAttempted	1.3.6.1.4.1.111.6.1.3.1.17
oraNamesServerCreatedOnLookup	1.3.6.1.4.1.111.6.1.3.1.18
oraNamesServerLookupFailures	1.3.6.1.4.1.111.6.1.3.1.19
oraNamesServerExactMatches	1.3.6.1.4.1.111.6.1.3.1.20
oraNamesServerForwardFailures	1.3.6.1.4.1.111.6.1.3.1.21
oraNamesServerForwardTimeouts	1.3.6.1.4.1.111.6.1.3.1.22
oraNamesServerResponsesReceived	1.3.6.1.4.1.111.6.1.3.1.23
oraNamesServerErrorResponsesReceived*	1.3.6.1.4.1.111.6.1.3.1.24
oraNamesServerRequestsForwarded	1.3.6.1.4.1.111.6.1.3.1.25

Table C-3 oraNamesServerTable Variables and Corresponding Object IDs

Variable Name	Object ID
oraNamesServerLastReload*	1.3.6.1.4.1.111.6.1.3.1.26
oraNamesServerReloadCheck-Failures	1.3.6.1.4.1.111.6.1.3.1.27
oraNamesServerLastCheckpoint*	1.3.6.1.4.1.111.6.1.3.1.28
oraNamesServerName	1.3.6.1.4.1.111.6.1.3.1.29
oraNamesServerAdminRegion	1.3.6.1.4.1.111.6.1.3.1.30

* Variables marked with an asterisk are not supported.
Attempts to access these variables may result in errors.

A description of each of these variables follows.

oraNamesServerQueriesReceived

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of query requests received by this server. Serves as an indicator of the overall load on this server.

Typical Range

0 - 4294967295

Significance

very important

Related Variables

oraNamesServerLastNnamesNotFound,
oraNamesServerQueriesTotalTime

Suggested Presentation

rolling counter

oraNamesServerQueriesTotalTime

Syntax

TimeTicks

Max-Access

read-only

Explanation

Indicates the total time spent processing query requests (in centiseconds), including the time it takes to forward the request and get an answer. In the current version (2.2), this represents all of the server's primary activity. When delete/rename/update are supported, this variable describes the query processing load relative to the load from requests of the other three types.

Typical Range

0 - 4294967295 centiseconds

Significance

important

Related Variables

oraNamesServerQueriesReceived

Suggested Presentation

simple string

oraNamesServerCorruptMessagesReceived

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of corrupted messages this server has received. A corrupt message indicates either that a bug exists in the client or network transport, or that the caller does not intend to be calling an Oracle Names server (wrong number). The second cause is more likely, and indicates configuration inconsistencies.

Typical Range

0 - 4294967295

Significance

important

Related Variables

very important

Suggested Presentation

rolling counter

oraNamesServerResponsesSent

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of responses of all sorts this server has sent. This variable is a good general indicator of the cumulative load. The number of responses should equal the sum of the requests received.

Typical Range

0 - 4294967295

Significance

very important

Related Variables

oraNamesServerDeletesReceived, oraNamesServerQueriesReceived, oraNamesServerRenamesReceived

Suggested Presentation

rolling counter

oraNamesServerAliasLoopsDetected

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of alias loops this server has detected. Alias loops are the result of improperly defined sets of domain data in two or more regions. Any alias loops should be corrected immediately.

Typical Range

0 - 10

Significance

important

Related Variables

none

Suggested Presentation

warning light for any non-zero value.

oraNamesServerLookupsAttempted

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the query load (number of name lookup operations) this server has performed.

Typical Range

0 - 4294967295

Significance

very important

Related Variables

oraNamesServerCreatedOnLookup, oraNamesSeerverExactMatches
oraNamesServerLookupFailures

Suggested Presentation

rolling counter

oraNamesServerCreatedOnLookup

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of names created on lookup because they were not found. Cache entries are created whenever the server receives a query for a certain name for the first time. This value represents the degree of diversity of queries to foreign regions. Higher values might indicate the need for tuning.

Typical Range

0 - 4294967295

Significance

important

Related Variables

oraNamesServerLookupsAttempted

Suggested Presentation

rolling counter

oraNamesServerLookupFailures

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of name lookups for a name not known to this server. Frequent lookup failures might indicate configuration inconsistencies, in that clients are looking for names in undefined domains.

Typical Range

0 - 4294967295

Significance

important

Related Variables

oraNamesServerLookupsAttempted

Suggested Presentation

rolling counter

oraNamesServerExactMatches

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the “hit rate,” that is the number of name lookups resulting in an exact match with information known to this server. This value includes both queries for local region data and queries for foreign names which have already been cached.

Typical Range

0 - 4294967295

Significance

important

Related Variables

oraNamesServerLookupsAttempted, oraNamesServerLookupFailures

Suggested Presentation

rolling counter

oraNamesServerForwardFailures

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of forwarded requests which failed because no servers responded to the request. A high value indicates either that the names servers for some other regions are down, or that this server's topology data is incorrect.

Typical Range

0 - 4294967295

Significance

important

Related Variables

oraNamesServerRequestsForwarded

Suggested Presentation

rolling counter with siren

oraNamesServerForwardTimeouts

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of requests this server has forwarded which timed out waiting for a response. The cause might either be a high processing load at the foreign server, or some network-related delay.

Typical Range

0 - 4294967295

Significance

important

Related Variables

oraNamesServerRequestsForwarded

Suggested Presentation

rolling counter with siren

oraNamesServerResponsesReceived

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of responses this server has received. This value should match the number of requests forwarded, minus oraNamesServerForwardFailures and oraNamesServerForwardTimeouts.

Typical Range

0 - 4294967295

Significance

important

Related Variables

oraNamesServerRequestsForwarded

Suggested Presentation

rolling counter

oraNamesServerRequestsForwarded

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of requests that this server has forwarded because it is not authoritative for the requested name.

Typical Range

0 - 4294967295

Significance

important

Related Variables

oraNamesServerForwardFailure, oraNamesServerForwardTimeout,
oraNamesServerErrorResponsesReceived

Suggested Presentation

rolling counter

oraNamesServerReloadCheckFailures

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the number of times this server has failed in a check to see whether the region data changed and needs reloading. Indicates that the source for this server's network definition is unavailable. These failures are likely to be innocuous, but could be the result of inaccurate configuration information for this Oracle Names server.

Typical Range

0 - 4294967295

Significance

important

Related Variables

oraNamesConfigAdminRegion, oraNamesServerAdminRegionDescription

Suggested Presentation
rolling counter with siren

oraNamesServerName

Syntax
DisplayString

Max-Access
read-only

Explanation
Indicates this server's name, as printed in its start-up banner.

Typical Range
any valid server name

Significance
important

Related Variables
none

Suggested Presentation
simple string

oraNamesServerAdminRegion

Syntax
DisplayString

Max-Access
read-only

Explanation
This is a description that defines the server's region. It includes the region name and the location of its network definition.

Typical Range
any valid region name

Significance

important

Related Variables

oraNamesConfigAdminRegion

Suggested Presentation

simple string

D

Interpreting Variables of the Public RDBMS MIB

This appendix provides information to help you interpret individual variables in the Oracle implementation of the public RDBMS MIB. Note that this appendix emphasizes Oracle's implementation. For information concerning other implementation alternatives for these variables, refer to MIB itself.

This appendix includes sections covering public RDBMS MIB variables that Oracle implements in the following tables

- rdbmsDbTable
- rdbmsDbInfoTable
- rdbmsSrvTable
- rdbmsSrvInfoTable
- rdbmsSrvParamTable
- rdbmsRelTable
- rdbmsTraps

Note that Oracle does not implement the following tables of the public RDBMS MIB:

- rdbmsDbParamTable
- rdbmsDbLimitedResourceTable
- rdbmsSrvLimitedResourceTable

Attempts to access any of the variables that Oracle is not implementing results in noSuchName (SNMPv1) or noSuchInstance (SNMPv2) being returned.

rdbmsDbTable

The rdbmsDbTable contains general information on each database installed on the managed node. Any installed database that has been configured for SNMP support, whether or not it is actively opened, is represented by a row in the rdbmsDbTable.

Each entry in the rdbmsDbTable represents a given database installed on the node. Each entry is indexed by rdbmsDbIndex. The current values of the rdbmsDbTable variables are retrieved from a variety of sources on the managed node.

Oracle implements all rdbmsDbTable variables; Table D-1 lists each of them, together with its corresponding object ID.

Table D-1 rdbmsDbTable Variables and Corresponding Object IDs

Variable Name	Object ID
rdbmsDbIndex	1.3.6.1.2.1.39.1.1.1.1
rdbmsDbPrivateMIBOID	1.3.6.1.2.1.39.1.1.1.2
rdbmsDbVendorName	1.3.6.1.2.1.39.1.1.1.3
rdbmsDbName	1.3.6.1.2.1.39.1.1.1.4
rdbmsDbContact	1.3.6.1.2.1.39.1.1.1.5

rdbmsDbIndex

Syntax

INTEGER (1 - 2147483647)

Max-Access

not-accessible

Explanation

A numeric index, unique among all of the vendors' databases installed on this managed node. This value is a surrogate for the conceptually unique key, which is {vendorOID, databasename}. In the Oracle implementation, the value of this variable when not running the Oracle Parallel Server is the value of rdbmsSrvIndex for this installed database server.

Typical Range

1 - 10

Significance

very important

Related Variables

rdbmsSrvIndex

Suggested Presentation

not applicable

rdbmsDbPrivateMIBOID**Syntax**

OBJECT IDENTIFIER

Max-Access

read-only

Explanation

Displays the authoritative identification for the private MIB of this installed database. In the Oracle implementation, the value of rdbmsDbVendorOID is hardcoded as the root of Oracle's OID subtree (1.3.6.1.4.1.111).

Typical Range

1.3.6.1.4.1.111 (only)

Significance

very important

Related Variables

rdbmsSrvVendorOID

Suggested Presentation

simple string

rdbmsDbVendorName**Syntax**

DisplayString

Max-Access

read-only

Explanation

Displays the name of the vendor whose RDBMS manages this installed database, for informational purposes. In the Oracle implementation, the value of this variable is hardcoded in the subagent as “Oracle.”

Typical Range

6 characters (only)

Significance

important

Related Variables

rdbmsSrvVendorName

Suggested Presentation

icon or simple string

rdbmsDbName

Syntax

DisplayString

Max-Access

read-only

Explanation

Displays the name of this installed database, in product-specific format. In the Oracle implementation, the value of rdbmsDbName is retrieved from the DB__NAME variable in SNMP.ORA. This name is globally unique and includes domain information.

Typical Range

5 - 25 characters

Significance

important

Related Variables

rdbmsSrvName

Suggested Presentation

icon or simple string

rdbmsDbContact

Syntax

DisplayString

Max-Access

read-write

Explanation

Displays the name of the contact person for this installed database, together with information indicating how to contact this person. In the Oracle implementation, the value of this variable is retrieved from the SNMP.ORA configuration file.

Typical Range

2 - 255 characters

Significance

important

Related Variables

rdbmsSrvContact

Suggested Presentation

simple string

rdbmsDbInfoTable

The rdbmsDbInfoTable contains additional general information about actively opened database instances on the managed node. If an installed database has been configured for SNMP support but is not actively opened, then attempts to access corresponding instances in this table may result in either noSuchName (SNMPv1), or noSuchInstance (SNMPv2). “Actively opened” is determined by the values of all the rdbmsRelState entries for this database in the rdbmsRelTable.

Each entry in the rdbmsDbInfoTable represents a particular actively opened database instance on the node. Each entry is indexed by rdbmsDbIndex. However, because rdbmsDbTable contains an entry for each database installed on that node, whether or not it is actively open, there may or may not be a one-to-one correspondence between entries in the two tables at any point in time. The current value of the rdbmsDbInfoTable variable are retrieved from a variety of sources on the managed node.

Table D-2 lists each rdbmsDbInfoTable variable that Oracle is implementing, together with its corresponding object ID.

Table D-2 rdbmsDbInfoTable Variables and Corresponding Object IDs

Variable Name	Object ID
rdbmsDbInfoProductName	1.3.6.1.2.1.39.1.2.1.1
rdbmsDbInfoVersion	1.3.6.1.2.1.39.1.2.1.2
rdbmsDbInfoSizeUnits	1.3.6.1.2.1.39.1.2.1.3
rdbmsDbInfoSizeAllocated	1.3.6.1.2.1.39.1.2.1.4
rdbmsDbInfoSizeUsed	1.3.6.1.2.1.39.1.2.1.5
rdbmsDbInfoLastBackup*	1.3.6.1.2.1.39.1.2.1.6

* Variables marked with an asterisk are not supported.
Attempts to access these variables may result in errors.

Note that Oracle is not implementing rdbmsDbInfoLastBackup because Oracle allows individual tablespaces to be backed up; thus, the time of the last full database backup is not meaningful.

rdbmsDbInfoProductName

Syntax

DisplayString

Max-Access

read-only

Explanation

Displays the textual product name of the server that created or last restructured this database instance. In the Oracle implementation, the value of this variable is retrieved from the BANNER field in V\$VERSION.

Typical Range

253 characters

Significance

important

Related Variables

rdbmsSrvProductName

Suggested Presentation

icon or simple string

rdbmsDbInfoVersion**Syntax**

DisplayString

Max-Access

read-only

Explanation

Displays the version number of the server that created or last restructured this database instance. The format is specific to the product. In the Oracle implementation, the value of this variable is derived internally.

Typical Range

not applicable

Significance

important (depending on the application)

Related Variables

applVersion

Suggested Presentation

simple string

rdbmsDbInfoSizeUnits**Syntax**

INTEGER (1) bytes, (2) kbytes, (3) mbytes, (4) gbytes, or (5) tbytes.

Max-Access

read-write

Explanation

Displays the units used to measure the size of this database instance, as indicated by the values for `rdbmsDbInfoSizeAllocated` and `rdbmsDbInfoSizeUsed`. In the Oracle implementation, the value of `rdbmsDbInfoSizeUnits` is the least that allows `rdbmsDbInfoSizeAllocated` to be expressed as a 32-bit integer.

(1) bytes, indicates size measured in bytes; (2) kbytes, indicates units of kilobytes; (3) mbytes, indicates units of megabytes; (4) gbytes, indicates units of gigabytes; or (5) tbytes, indicates units of terabytes. Each of these unit measurements are binary multiples (1K = 1024).

Typical Range

enumerated 1 - 5

Significance

very important

Related Variables

`rdbmsDbInfoSizeAllocated`, `rdbmsDbInfoSizeUsed`

Suggested Presentation

simple string

rdbmsDbInfoSizeAllocated

Syntax

INTEGER (1 - 2147483647)

Max-Access

read-write

Explanation

Displays the estimated size of this database instance (in `rdbmsDbInfoSizeUnits`), which is the disk space that has been allocated to it and is no longer available to users on this host. The `rdbmsDbInfoSizeAllocated` variable does not necessarily indicate the amount of space actually in use for database data; `rdbmsDbInfoSizeUsed` retrieves this value instead. In the Oracle implementation, the value of this variable is the sum of the BYTES field for the rows of the `DBA_DATA_FILES` tables.

Typical Range

1 - 2147483647

Significance

very important

Related Variables

rdbmsDbInfoSizeUnits, rdbmsDbInfoSizeUsed

Suggested Presentation

simple string or gauge

rdbmsDbInfoSizeUsed

Syntax

INTEGER (1 - 2147483647)

Max-Access

read-only

Explanation

Displays the estimated size of this database instance (in rdbmsDbInfoSizeUnits), actually in use for database data. In the Oracle implementation, the value of rdbmsDbInfoSizeUsed is the sum of values in the BYTES field of DBA_DATA_FILES minus the sum of values in the BYTES field of DBA_FREE_SPACE. rdbmsDbInfoSizeUsed should always be less than or equal to rdbmsDbInfoSizeAllocated.

Typical Range

1 - 2147483647

Significance

very important

Related Variables

rdbmsDbInfoSizeAllocated, rdbmsDbInfoSizeUnits

Suggested Presentation

gauge

rdbmsSrvTable

The rdbmsSrvTable contains generic information on each database server installed on the managed node. In the standard Oracle configuration, one server supports

one database. Thus, while the content of rdbmsSrvTable essentially mirrors the content of rdbmsDbTable, Oracle has chosen to implement both tables in order to fully adhere to one of the central precepts of the public RDBMS MIB standard. This precept is that a distinction between the database and its server must be made, in order to account for other vendors' architectures.

Any installed database that has been configured for SNMP support, whether or not it is actively opened, is represented by a row in the rdbmsDbTable. Each entry in the rdbmsSrvTable represents a given database server on the node. Each entry is indexed by applIndex. The current value of each rdbmsSrvTable variable is retrieved directly from a variety of sources on the managed node.

Oracle implements all rdbmsSrvTable variables. Table D-3 lists each of them, together with its corresponding object ID.

Table D-3 *rdbmsDbSrvTable Variables and Corresponding Object IDs*

Variable Name	Object ID
rdbmsSrvPrivateMIBOID	1.3.6.1.2.1.39.1.5.1.1
rdbmsSrvVendorName	1.3.6.1.2.1.39.1.5.1.2
rdbmsSrvProductName	1.3.6.1.2.1.39.1.5.1.3
rdbmsSrvContact	1.3.6.1.2.1.39.1.5.1.4

rdbmsSrvPrivateMIBOID

Syntax

OBJECT IDENTIFIER

Max-Access

read-only

Explanation

Displays the authoritative identification for the private MIB for this server. In the Oracle implementation, the value of this variable is hardcoded as the root of Oracle's OID subtree (1.3.6.1.4.1.111). If no OBJECT IDENTIFIER exists for the private MIB, attempts to access this object will return noSuchName (SNMPv1) or noSuchInstance (SNMPv2).

Typical Range

1.3.6.1.4.1.111 (only)

Significance

very important

Related Variables

rdbmsDbVendorOID

Suggested Presentation

simple string

rdbmsSrvVendorName

Syntax

DisplayString

Max-Access

read-only

Explanation

Displays the name of the vendor of this installed database server. In the Oracle implementation, the value of this variable is hardcoded in the subagent as “Oracle.”

Typical Range

6 characters (only)

Significance

important

Related Variables

rdbmsDbVendorName

Suggested Presentation

icon or simple string

rdbmsSrvProductName

Syntax

DisplayString

Max-Access

read-only

Explanation

Displays the product name of this server. In the Oracle implementation, the value of this variable is hardcoded as “Oracle7 server.”

Typical Range

14 characters (only)

Significance

important

Related Variables

rdbmsDbInfoProductName

Suggested Presentation

icon or simple string

rdbmsSrvContact

Syntax

DisplayString

Max-Access

read-write

Explanation

Displays the textual identification of the contact person for this managed server, together with information indicating how to contact this person. In the Oracle implementation, the value of this variable is retrieved from the SNMP.ORA configuration file.

Typical Range

0 - 255 characters

Significance

important

Related Variables

rdbmsDbContact

Suggested Presentation

simple string

rdbmsSrvInfoTable

The rdbmsSrvInfoTable contains additional information about each database server instance actively running on the managed node. The visibility of a database server instance in rdbmsSrvInfoTable is determined by the value of the corresponding applOperStatus object for that database server. (For details about applOperStatus, see Appendix E, “Interpreting Implemented Variables of the Network Services MIB.”) Monitoring these variables is important for tuning server functions such as I/O, access and activity.

Each entry in the rdbmsDbSrvInfoTable represents a given actively opened database server instance on the node. Each entry is indexed by applIndex. The current value of each rdbmsSrvInfoTable variable is retrieved directly from various VS dynamic performance tables of this database server instance.

Table D-4 lists each of the rdbmsDbInfoTable variables that Oracle is implementing, together with its corresponding object ID.

Table D-4 rdbmsDbSrvInfoTable Variables and Corresponding Object IDs

Variable Name	Object ID
rdbmsSrvInfoStartupTime	1.3.6.1.2.1.39.1.6.1.1
rdbmsSrvInfoFinishedTransactions	1.3.6.1.2.1.39.1.6.1.2
rdbmsSrvInfoDiskReads	1.3.6.1.2.1.39.1.6.1.3
rdbmsSrvInfoLogicalReads	1.3.6.1.2.1.39.1.6.1.4
rdbmsSrvInfoDiskWrites	1.3.6.1.2.1.39.1.6.1.5
rdbmsSrvInfoLogicalWrites	1.3.6.1.2.1.39.1.6.1.6
rdbmsSrvInfoPageReads	1.3.6.1.2.1.39.1.6.1.7
rdbmsSrvInfoPageWrites	1.3.6.1.2.1.39.1.6.1.8
rdbmsSrvInfoDiskOutOfSpaces*	1.3.6.1.2.1.39.1.6.1.9
rdbmsSrvInfoRequestsHandled	1.3.6.1.2.1.39.1.6.1.10
rdbmsSrvInfoRequestsRecvs*	1.3.6.1.2.1.39.1.6.1.11
rdbmsSrvInfoRequestSends*	1.3.6.1.2.1.39.1.6.1.12
rdbmsSrvInfoHighwaterIn-boundAssociations	1.3.6.1.2.1.39.1.6.1.13
rdbmsSrvInfoMaxInboundAssociations	1.3.6.1.2.1.39.1.6.1.14

* Variables marked with an asterisk are not supported.

Attempts to access these variables may result in errors.

Oracle is not implementing the following rdbmsDbInfoTable variables:

- rdbmsSrvInfoDiskOutOfSpaces
- rdbmsSrvInfoRequestRecvs
- rdbmsSrvInfoRequestSends

rdbmsSrvInfoStartupTime

Syntax

DateAndTime

Max-Access

read-only

Explanation

Displays the date and time at which this server was last started. In the Oracle implementation, the value of this variable is computed from the STARTUP TIME-JULIAN and STARTUP TIME-SECONDS fields in V\$INSTANCE.

Typical Range

not applicable

Significance

important

Related Variables

applUpTime

Suggested Presentation

simple string

rdbmsSrvInfoFinishedTransactions

Syntax

Gauge32

Max-Access

read-only

Explanation

Displays the number of transactions (visible to this server) upon which either COMMIT or ABORT operations have been completed since startup of this database server instance. Some database operations, such as read-only queries, may not result in the creation of a transaction. In the Oracle implementation, the value of this variable is the sum of USER ROLLBACKS and USER COMMITS from V\$SYSSTAT.

Typical Range

0 - 4294967295

Significance

very important

Related Variables

none

Suggested Presentation

counter

rdbmsSrvInfoDiskReads

Syntax

Counter32

Max-Access

read-only

Explanation

Displays the total number of reads of database files this server has issued to the operating system since startup of this database server instance. In the Oracle implementation, the value of this variable is retrieved from PHYSICAL READS in V\$SYSSTAT.

Typical Range

0 - 4294967295

Significance

very important

Related Variables

rdbmsSrvInfoLogicalReads, rdbmsSrvInfoPageReads

Suggested Presentation

counter

rdbmsSrvInfoLogicalReads

Syntax

Counter32

Max-Access

read-only

Explanation

Displays the total number of logical reads of database files that this server has made internally since startup. This value and the value of rdbmsSrvInfoDiskReads reveal the effect of caching on read operations. In the Oracle implementation, the value of this variable is the sum of CONSISTENT GETS and DB BLOCK GETS in V\$SYSSTAT.

Typical Range

0 - 4294967295

Significance

very important

Related Variables

rdbmsSrvInfoDiskReads

Suggested Presentation

counter

rdbmsSrvInfoDiskWrites

Syntax

Counter32

Max-Access

read-only

Explanation

Displays the total number of writes to database files this server has issued to the operating system since startup. In the Oracle implementation, the value of this variable is retrieved from PHYSICAL WRITES in V\$SYSSTAT.

Typical Range

0 - 4294967295

Significance

very important

Related Variables

rdbmsSrvInfoPageWrites, rdbmsSrvInfoLogicalWrites

Suggested Presentation

counter

rdbmsSrvInfoLogicalWrites

Syntax

Counter32

Max-Access

read-only

Explanation

The total number of times parts of the database files have been marked “dirty” and in need of writing to the disk. This value and rdbmsSrvInfoDiskWrites give some indication of the effect of “write-behind” strategies in reducing the number of disk writes compared to database operations. Because the writes may be done by servers other than those marking the parts of the database files dirty, these values may only be meaningful when aggregated across all servers sharing a common cache. Numbers are not comparable between products. In the Oracle implementation, the value of this variable is retrieved from DB BLOCK CHANGES in V\$SYSSTAT.

Typical Range

0..4294967295

Significance

very important

Related Variables

rdbmsSrvInfoDiskWrites

Suggested Presentation

counter32

rdbmsSrvInfoPageReads**Syntax**

Counter32

Max-Access

read-only

Explanation

Displays the total number of pages in database files this server has read since startup of this database server instance. “Pages” are product-specific units of disk I/O operations. This value, together with the value of rdbmsSrvInfoDisksReads, reveals the effect of any grouping read-ahead that may be used to enhance performance of some queries, such as scans. In the Oracle implementation, the value of this variable is the sum of all PHYBLKRD entries in V\$FILESTAT.

Typical Range

0 - 4294967295

Significance

very important

Related Variables

rdbmsSrvInfoDiskReads

Suggested Presentation

counter

rdbmsSrvInfoPageWrites**Syntax**

Counter32

Max-Access

read-only

Explanation

Displays the total number of pages in database files this server has written since this startup of this database server instance. Pages are product-specific units of disk I/O. This value, together with the value of `rdbmsSrvInfoDiskWrites`, shows the effect of write strategies that collapse logical writes of continuous pages into single calls to the operating system. In the Oracle implementation, the value of this variable is the sum of all `PHYBLKWRT` entries in `V$FILESTAT`.

Typical Range

0 - 4294967295

Significance

very important

Related Variables

`rdbmsSrvInfoDiskWrites`

Suggested Presentation

counter

rdbmsSrvInfoRequestsHandled

Syntax

Counter32

Max-Access

read-only

Explanation

Displays the total number of requests made to the server on inbound associations since this startup of this database server instance.

`rdbmsSrvInfoRequestsHandled` is intended to encapsulate high level semantic operations between clients and servers, or between peers. For example, one request might correspond to a `SELECT` or an `INSERT` statement. In contrast to `rdbmsSrvInfoDiskReads` or `rdbmsSrvInfoDiskWrites`, this variable is not intended to capture disk I/O operations.

In the Oracle implementation, the value of this variable is retrieved from “user calls” in `V$SYSSTAT`.

Typical Range

0 - 4294967295

Significance

very important

Related Variables

rdbmsSrvInfoRequestRecvs, rdbmsSrvInfoRequestSends

Suggested Presentation

counter

rdbmsSrvInfoHighwaterInboundAssociations

Syntax

Gauge32

Max-Access

read-only

Explanation

Displays the greatest number of inbound associations that have been simultaneously open to this server since this startup of this database server instance. In the Oracle implementation, the value of this variable is retrieved from SESSION_HIGHWATER in V\$LICENSE.

Typical Range

0 - value of rdbmsSrvInfoMaxInboundAssociations

Significance

important

Related Variables

rdbmsSrvInfoMaxInboundAssociations

Suggested Presentation

gauge

rdbmsSrvInfoMaxInboundAssociations

Syntax

INTEGER (1..2147483647)

Max-Access

read-write

Explanation

Displays the greatest number of inbound associations that can be simultaneously open with this server. If there is no limit, then the value should be zero. In the Oracle implementation, the value of this variable is retrieved from SESSIONS_MAX in V\$LICENSE.

Typical Range

1 - 2147483647

Significance

important

Related Variables

applInboundAssociations, rdbmsSrvInfoHighwaterInboundAssociations

Suggested Presentation

simple string

rdbmsSrvParamTable

The rdbmsSrvParamTable contains configuration parameters for a database server installed on this managed node. This table roughly corresponds to the oraDbConfigTable of the private Oracle Database MIB, covered in Appendix A. If you are developing an Oracle-specific application, you not need to concern yourself with this table; instead, you should focus your attention on oraDbConfigTable, which has been designed for more convenient use.

Each entry in the rdbmsSrvParamTable represents a particular configuration parameter for a database server on the node. Each entry is indexed first by applIndex, then by rdbmsSrvParamName, and finally by rdbmsSrvParamSubIndex; thus, there normally is a one-to-many relationship between a database server and its configuration parameters, and a one-to-many relationship between a configuration parameter and its multiple values. (For details about applIndex, see Appendix E, “Interpreting Implemented Variables of the Network Services MIB.”) However, in the Oracle implementation, multiple values for a configuration parameter are concatenated into a single entry for that parameter. The current value of each rdbmsSrvInfoTable variable is retrieved directly from a corresponding variable in the INIT.ORA configuration file for this database server.

Entries for a server must be present if the value of the corresponding applOperStatus object is up (1). (See Appendix E for more information on the applOperStatus object.) If an instance of applOperStatus is not up (not 1), then

attempts to access corresponding instances in this table may result in either noSuchName (SNMPv1) or noSuchInstance (SNMPv2) being returned by the agent.

Table D-5 lists each rdbmsSrvParamTable variable that Oracle is implementing, together with its corresponding object ID.

Table D-5 *rdbmsDbSrvParamTable Variables and Corresponding Object IDs*

Variable Name	Object ID
rdbmsSrvParamName	1.3.6.1.2.1.39.1.7.1.1
rdbmsSrvParamSubIndex	1.3.6.1.2.1.39.1.7.1.2
rdbmsSrvParamID*	1.3.6.1.2.1.39.1.7.1.3
rdbmsSrvParamCurrValue	1.3.6.1.2.1.39.1.7.1.4
rdbmsSrvComment*	1.3.6.1.2.1.39.1.7.1.5

* Variables marked with an asterisk are not supported.
Attempts to access these variables may result in errors.

Oracle is not implementing the following rdbmsSrvParamTable variables:

- rdbmsSrvParamComment
- rdbmsSrvParamID

rdbmsSrvParamName

Syntax

DisplayString (1..64)

Max-Access

not-accessible

Explanation

Displays the name of a configuration parameter for a server. This name is product-specific. The length is limited to 64 characters to minimize traffic of keys and to fit on one line. In the Oracle implementation, the value of this variable is the name of a parameter in the INIT.ORA file.

Typical Range

1 - 45 characters

Significance
less important

Related Variables
each oraDbConfigTable variable

Suggested Presentation
simple string

rdbmsSrvParamSubIndex

Syntax
INTEGER (1 - 2147483647)

Max-Access
not-accessible

Explanation
The subindex value for this parameter. In this Oracle implementation, the value of this variable is always 1.

Typical Range
1 (only)

Significance
less important

Related Variables
none

Suggested Presentation
not applicable

rdbmsSrvParamCurrValue

Syntax
DisplayString

Max-Access
read-write

Explanation

Displays the current value for this configuration parameter, as retrieved from the INIT.ORA file in the Oracle implementation.

Typical Range

0 - 255 characters

Significance

less important

Related Variables

oraDbConfigTable variables

Suggested Presentation

simple string

rdbmsRelTable

The rdbmsRelTable indicates how databases and servers on this managed node are related. In the standard Oracle implementation, one server supports one database; nevertheless, this table has been implemented in order to fully adhere to the public RDBMS MIB standard.

Each entry in the rdbmsDbRelTable represents a mapping between a database server and a database on the node. Each entry is indexed first by rdbmsDbIndex, and then by applIndex; thus, for the standard Oracle configuration of one server per database, these two indices are the same. (For details on applIndex, see Appendix E, "Interpreting Implemented Variables of the Network Services MIB.")

Table D-6 lists the rdbmsRelTable variable that Oracle is implementing, together with its corresponding object ID.

Table D-6 *rdbmsRelTable Variables and Corresponding Object IDs*

Variable Name	Object ID
rdbmsRelState	1.3.6.1.2.1.39.1.9.1.1
rdbmsRelActiveTime	1.3.6.1.2.1.39.1.9.1.2

rdbmsRelState

Syntax

INTEGER (2) active or (5) unavailable.

Max-Access

read-write

Explanation

Displays the state of this server's access to this database. Oracle implements (2) active and unavailable (5) only. Active (2) means the server is actively using the database. Unavailable (5) means the database is not available through this server.

Typical Range

2 or 5

Significance

very important

Related Variables

appleOperStatus, rdbmsStateChange

Suggested Presentation

icon or alarm

rdbmsTraps

Unlike other SNMP variables, a trap variable is not an agent's response to a management station's request for information. Rather, it is a message that an agent can send unsolicited to a management station when that agent notices that some condition has occurred (a threshold has been reached, for example).

Table D-7 lists each rdbmsTraps variable and its corresponding object ID.

Table D-7 *rdbmsTraps Variables and Corresponding Object IDs*

Variable Name	Object ID
rdbmsStateChange	1.3.6.1.2.39.2.1.1.1

rdbmsStateChange

Objects

{rdbmsRelState }

Explanation

An rdbmsStateChange trap signifies that one of the database servers this on this node has changed its rdbmsRelState in a way that makes it less accessible for use. In the Oracle implementation, active (2) is considered fully accessible. The state sent with the trap is the new, less accessible state ((5) unavailable).

Typical Range

5 (only)

Significance

very important

Related Variables

rdbmsRelState

Suggested Presentation

alarm

Interpreting Implemented Variables of the Network Services MIB

This appendix provides information to help you interpret those variables of the public Network Services MIB, Version 2 (RFC 1565) that Oracle has implemented. Specifically, it includes a section covering SNMP variables in the following table:

- applTable

applTable

The applTable contains generic variables designed to apply to all types of network service applications. Certain variables of the applTable have been implemented for three of the Oracle services: the Oracle7 and Oracle8 database servers and Oracle Names. (The Listener does not make use of any Network Services MIB variables.)

Each entry in the applTable represents one of these three applications on the managed node. Each applTable entry for the Oracle7 and Oracle8 database server applications represents a database server that has been configured in the SNMP.ORA configuration file, whether or not a current instance of that installed database server is running. In contrast, applTable entries for the Oracle Names applications only represent current instances of those services. If an Oracle Names service is configured in SNMP.ORA, but is not currently running, it would not appear as an entry in the applTable. Each applTable entry is indexed by applIndex.

Table E-1 lists the variables of the applTable and indicates which ones have been implemented for each of the three Oracle services (the Oracle7 and Oracle8 database servers and Oracle Names).

Table E-1 applTable Variables Implemented for Two Oracle Services

Variable Name	Oracle7 and Oracle8 Servers	Oracle Names
applIndex	x	x
applName	x	x
applDirectoryName		
applVersion	x	x
applUptime	x	
applOperStatus	x	
applLastChange	x	
applInboundAssociations	x	
applOutboundAssociations		
applAccumulatedInboundAssociations		x
applAccumulatedOutboundAssociations		x
applLastInboundActivity		
applLastOutboundActivity		
applRejectedInboundAssociations		x
applFailedOutboundAssociations		x

The only applTable variable that is not implemented for any of these Oracle services is applDirectory, because it only has meaning for sites using OSI directory services.

Table E-2 lists the implemented variables of the applTable and their corresponding object IDs.

Table E-2 *applTable Variables and Corresponding Object IDs*

Variable Name	Object ID
applIndex	1.3.6.1.2.1.27.1.1.1
applName	1.3.6.1.2.1.27.1.1.2
applDirectoryName	1.3.6.1.2.1.27.1.1.3
applVersion	1.3.6.1.2.1.27.1.1.4
applUptime	1.3.6.1.2.1.27.1.1.5
applOperStatus	1.3.6.1.2.1.27.1.1.6
applLastChange	1.3.6.1.2.1.27.1.1.7
applInboundAssociations	1.3.6.1.2.1.27.1.1.8
applOutboundAssociations	1.3.6.1.2.1.27.1.1.9
applAccumulatedInboundAssociations	1.3.6.1.2.1.27.1.1.10
applAccumulatedOutboundAssociations	1.3.6.1.2.1.27.1.1.11
applLastInboundActivity	1.3.6.1.2.1.27.1.1.12
applLastOutboundActivity	1.3.6.1.2.1.27.1.1.13
applRejectedInboundAssociations	1.3.6.1.2.1.27.1.1.14
applFailedOutboundAssociations	1.3.6.1.2.1.27.1.1.15

A description of all implemented applTable variables follows.

applIndex

Syntax

INTEGER (0 - 2147483647)

Max-Access

not-accessible

Explanation

An index to uniquely identify the application. This integer is assigned in the SNMP.ORA file.

applIndex is implemented for each of the Oracle7 and Oracle8 database servers, and Oracle Names services.

Typical Range

0 - 2147483647

Significance

very important

Related Variables

applName

Suggested Presentation

not applicable

applName

Syntax

DisplayString

Max-Access

read-only

Explanation

Indicates the name by which the network service application chooses to be known. applName is implemented for each of the Oracle7 and Oracle8 database servers, and Oracle Names applications.

For the Oracle7 and Oracle8 database servers, the value of applName is the value of the SID parameter in the SNMP.ORA configuration file.

For the Oracle Names service, the value of applName is retrieved from the NAMES.SERVER_NAME field of the NAMES.ORA file. All Oracle Names tables use appleName as an index.

Typical Range

5 - 25 characters

Significance

very important for the Oracle7 and Oracle8 database servers (less important for Oracle Names)

Related Variables

applIndex

Suggested Presentation

simple string

applVersion**Syntax**

DisplayString

Max-Access

read-only

Explanation

Indicates the version of the application software. The value is retrieved internally.

applVersion is implemented for each of the Oracle7 and Oracle8 database servers, and Oracle Names applications.

Typical Range

1 - 15 characters

Significance

less important

Related Variables

none

Suggested Presentation

simple string

applUptime**Syntax**

TimeStamp

Max-Access

read-only

Explanation

Indicates the value of sysUptime, a variable the master agent maintains, which is taken at the time the particular application instance (Oracle7 or Oracle8 database server) was last initialized.

If two requests for this variable return the same value, none of the counters associated with this application have been reset between the requests.

applUptime is implemented for the Oracle7 and Oracle8 database servers.

Typical Range

0..4294967295

Significance

very important

Related Variables

none

Suggested Presentation

gauge or counter

applOperStatus

Syntax

INTEGER (1) up, and (2), down

Max-Access

read-only

Explanation

Indicates the operational status of the application. Oracle is implementing (1) up and (2) down. The UP value (1) indicates that the application is operational and available. The DOWN value (2) indicates that the application is not available. applOperStatus is implemented for the Oracle7 and Oracle8 database servers.

If the value of the applOperStatus variable for this application is 2, indicating that it is not available, then the subagent cannot connect to it. In this case, only those MIB table(s) that exist independently of the operational status of that application will be SNMP-accessible. For the Oracle7 and Oracle8 database servers, these tables are the rdbmsDbTable and rdbmsSrvTable of the public RDBMS MIB only. All tables of the private Oracle Database MIB would be inaccessible when the value of applOperStatus is 2 (down).

Typical Range

enumerated 1 or 2

Significance

very important

Related Variables

none

Suggested Presentation

alarm or simple string

applLastChange

Syntax

TimeStamp

Max-Access

read-only

Explanation

Indicates the value of sysUptime at the time the network service application entered its current operational state. sysUptime is maintained by the master agent on this managed node. If the current state was entered prior to the last initialization of the local network management subsystem, then this object contains a value of 0.

applLastChange is implemented for the Oracle7 and Oracle8 database servers.

Typical Range

0 - 4294967295

Significance

less important

Related Variables

applUpTime, sysUptime

Suggested Presentation

simple string

applInboundAssociations

Syntax

Gauge32

Max-Access

read-only

Explanation

Indicates the number of current associations to this application, for which it is the responder. applInboundAssociations is implemented for the Oracle7 and Oracle8 database servers.

For an Oracle7 or Oracle8 database server configured for dynamic single threaded processes, this value is the number of application instances, as retrieved from SESSIONS_CURRENT in V\$LICENSE.

Typical Range

0 - 5 (Oracle Names)1 - 1,000 (Oracle7 and Oracle8 database server)

Significance

less important

Related Variables

none

Suggested Presentation

gauge, ala Tach (Names)

applAccumulatedInboundAssociations

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the total number of associations to this application for which it is the responder, since its initialization. This variable represents the overall request load. This variable is implemented for the Oracle Names services.

For the Oracle Names service, this value is derived from an internal table.

Typical Range

0..4294967295

Significance

very important

Related Variables

oraServerDeletesReceived (Oracle Names), oraServerQueriesReceived (Oracle Names), oraServerRenamesReceived (Oracle Names), oraServerUpdatesReceived (Oracle Names)

Suggested Presentation

rolling counter or gauge

applAccumulatedOutboundAssociations

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the forwarding load (the total number of associations to this application for which it is the initiator, since its initialization). This variable is implemented for the Oracle Names services.

For the Oracle Names service, this value is derived from an internal table.

Typical Range

0..4294967295

Significance

important

Related Variables

none

Suggested Presentation

counter

applRejectedInboundAssociations

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the total number of inbound associations the application entity has rejected, since application initialization. The variable is implemented for the Oracle Names services.

For Oracle Names, this value indicates client malfunction, or a possible inconsistency in configuration. It is retrieved from an internal table.

Typical Range

0..4294967295

Significance

important

Related Variables

None

oSuggested Presentation

rolling counter or gauge/time with warning light

applFailedOutboundAssociations

Syntax

Counter32

Max-Access

read-only

Explanation

Indicates the total number of associations since application initialization, for which the application entity is initiator and association establishment has failed. This variable is implemented for the Oracle Names services.

For Oracle Names, this variable indicates that remote servers are either down or not defined properly in this server's topology data. It is retrieved from an internal table.

Typical Range

0..4294967295

Significance

important

Related Variables

none

Suggested Presentation

rolling counter or gauge/time with warning light

Interpreting Variables of the Enterprise Manager MIB

This appendix provides information to help you interpret the variables of the private Oracle Enterprise Manager MIB which are implemented in this release. Specifically, it includes sections covering SNMP variables in the following tables:

- oraAgentEventTable
- oraAgentTraps

oraAgentEventTable

Table F-1 lists the variables of the oraAgentEventTable and their corresponding Object IDs.

Table F-1 oraAgentEventTable Variables and Corresponding Object IDs

Variable Name	Object ID
oraAgentEventIndex	1.3.6.1.4.1.111.12.1.1.1.1
oraAgentEventName	1.3.6.1.4.1.111.12.1.1.1.2
oraAgentEventID	1.3.6.1.4.1.111.12.1.1.1.3
oraAgentEventService	1.3.6.1.4.1.111.12.1.1.1.4
oraAgentEventTime	1.3.6.1.4.1.111.12.1.1.1.5
oraAgentEventSeverity	1.3.6.1.4.1.111.12.1.1.1.6
oraAgentEventUser	1.3.6.1.4.1.111.12.1.1.1.7
oraAgentEventAppID	1.3.6.1.4.1.111.12.1.1.1.8
oraAgentEventMessage	1.3.6.1.4.1.111.12.1.1.1.9

Table F-1 oraAgentEventTable Variables and Corresponding Object IDs

Variable Name	Object ID
oraAgentEventArguments	1.3.6.1.4.1.111.12.1.1.1.10
oraAgentEventResults	1.3.6.1.4.1.111.12.1.1.1.11

A description of each of these variables follows.

oraAgentEventIndex

Syntax

INTEGER

Max-Access

read-only

Explanation

Index for OraAgentEventTable.

Typical Range

not applicable

Significance

very important

Related Variables

none

Suggested Presentation

alarm

oraAgentEventName

Syntax

DisplayString

Max-Access

read-only

Status

mandatory

Explanation

The name of the event that occurred.

Typical Range

not applicable

Significance

very important

Related Variables

none

Suggested Presentation

alarm

oraAgentEventID**Syntax**

INTEGER

Max-Access

read-only

Status

mandatory

Explanation

The ID of the registration that generated this event occurrence.

Typical Range

not applicable

Significance

very important

Related Variables

none

Suggested Presentation

alarm

oraAgentEventService

Syntax

DisplayString

Max-Access

read-only

Status

mandatory

Explanation

The name of the service (database, SQL*Net listener, etc.) being monitored by this event.

Typical Range

not applicable

Significance

very important

Related Variables

none

Suggested Presentation

alarm

oraAgentEventTime

Syntax

DateAndTime

Max-Access

read-only

Status

mandatory

Explanation

The time at which this event was detected.

Typical Range

not applicable

Significance

very important

Related Variables

none

Suggested Presentation

alarm

oraAgentEventSeverity**Syntax**

INTEGER {warning(1), alert(2)}

Max-Access

read-only

Status

mandatory

Explanation

A relative measure of the severity of the event.

Typical Range

not applicable

Significance

very important

Related Variables

none

Suggested Presentation

alarm

oraAgentEventUser**Syntax**

DisplayString

Max-Access

read-only

Status

mandatory

Explanation

The name of the user who registered for this event.

Typical Range

not applicable

Significance

Very important

Related Variables

Suggested Presentation

Alarm

oraAgentEventAppID

Syntax

Integer

Max-Access

read-only

Status

mandatory

Explanation

The ID of the Enterprise Manager console application through which this event was registered.

Typical Range

not applicable

Significance

Very important

Related Variables**Suggested Presentation**

Alarm

oraAgentEventMessage**Syntax**

DisplayString

Max-Access

read-only

Status

mandatory

Explanation

Message associated with the event.

Typical Range

not applicable

Significance

very important

Related Variables

none

Suggested Presentation

alarm

oraAgentEventArguments**Syntax**

DisplayString

Max-Access

read-only

Status

mandatory

Explanation

The arguments that were passed to the script that detected this event.

Typical Range

not applicable

Significance

very important

Related Variables

none

Suggested Presentation

alarm

oraAgentEventResults

Syntax

DisplayString

Max-Access

read-only

Status

mandatory

Explanation

The results generated by the script that detected this event.

Typical Range

not applicable

Significance

very important

Related Variables

none

Suggested Presentation

alarm

oraAgentTraps

Unlike other SNMP variables, a trap variable is not an agent's response to a management station's request for information. Rather, it is a unsolicited message that an agent can send to a management station when that agent notices that some condition has occurred (a threshold has been reached, for example).

All events discovered by the Oracle Enterprise Manager agent can be configured to send an SNMP trap when the event occurs.

Traps sent out by the Oracle Enterprise Manager agent can be received by any tool that is listening on the standard UDP port 162 and is able to perform the required ASN.1 decoding. There is a wide variety of such products, ranging from free software available over the Internet to sophisticated network management platforms including HP's OpenView, Sun's Solstice, and IBM's NetView/6000.

This feature of the Oracle Enterprise Manager agent is available on platforms that support SNMP and only if the extensible SNMP master agent is started. The agent attempts to connect to the SNMP master agent at startup time. If this fails, either because the platform does not support SNMP or the master agent is not started, then no traps are sent. The destination of all traps is determined by the configuration matter of the SNMP master agent. See your operating system-specific documentation for details.

Table F-2 lists each oraAgentTraps variable and its corresponding object ID.

Table F-2 oraAgentTraps Variables and Corresponding Object IDs

Variable Name	Object ID
oraAgentEventOcc	1.3.6.1.4.1.111.12.2.2

oraAgentEventOcc

Objects

{oraAgentEventName, oraAgentEventID, oraAgentEventService, oraAgentEventTime, oraAgentEventSeverity, oraAgentEventUser, oraAgentEventAppID, oraAgentEventMessage, oraAgentEventArguments, oraAgentEventResults}

Explanation

The Enterprise Manager agent has detected an occurrence of an event for which it has no specific trap.

Typical Range

not applicable

Significance

very important

Related Variables

oraAgentEventName, oraAgentEventID, oraAgentEventService,
oraAgentEventTime, oraAgentEventSeverity, oraAgentEventUser,
oraAgentEventAppID, oraAgentEventMessage, oraAgentEventArguments,
oraAgentEventResults

Suggested Presentation

alarm

Keyboard Shortcuts

This appendix provides a list of general Windows keyboard shortcuts. For a complete list of Windows keyboard shortcuts and navigation, refer to your operating system documentation.

Figure G–1 General Windows Keyboard Shortcuts

Key	Action
F1	Displays Help information for the active object or the window as a whole.
WINDOWS LOGO KEY OR CTRL+ESC	Opens the Start menu located on the taskbar.
CTRL+ALT+DELETE	<p>In Microsoft Windows, opens the Close Program dialog box, which contains a list box of applications to be closed and the command buttons End Task, Shut Down, and Cancel.</p> <p>In Microsoft Windows NT, opens the Windows NT Security dialog box, with the following options: Lock Workstation, Logoff, Shut Down, Change Password, Task Manager, and Cancel. If you are not logged on, opens the logon dialog box.</p>
DELETE	Deletes the selected item(s). If the items are files, moves them to the Recycle Bin.
SHIFT+DELETE	Delete the selected item(s). If the items are files, destroys them immediately without moving them to the Recycle Bin.
CTRL+N	Opens the New dialog box. (You also can choose the New command from the File menu.)
CTRL+O	Opens the Open dialog box. (You also can choose the Open command from the File menu.)
CTRL+P	Opens the Print dialog box. (You also can choose the Print command from the File menu.)
CTRL+S	Opens the Save dialog box. (You also can choose the Save command from the File menu.)
CTRL+X	Cuts the selected item(s) to the Clipboard. (You also can choose the Cut command from the Edit menu.)
CTRL+INSERT OR CTRL+C	Copies the selected item(s) to the Clipboard. (You also can choose the Copy command from the Edit menu.)
SHIFT+INSERT OR CTRL+V	Pastes the copied items(s) from the Clipboard. (You also can choose the Paste command from the Edit menu.)
ALT+BACKSPACE OR CTRL+Z	Undoes the last action. Note that not all actions, such as shutting down, can be undone. (You also can choose the Undo command from the Edit menu.)
ALT+SHIFT+BACKSPACE	Redoes the previously undone action. (You also can choose the Redo command from the Edit menu.)

Key

WINDOWS LOGO KEY+M

Action

Minimizes all open windows. The keyboard focus goes to the least recently selected icon on the desktop. Add SHIFT to expand previously opened windows and return focus to the most recently used application.

Glossary

agent

A process on a managed node that is responsible for all SNMP transactions on that node. The agent accepts requests from the management station and answers them by returning data. It also initiates traps when exceptional conditions are detected.

ASN.1

Abstract Syntax Notation One. The notation used to define MIB variables.

control file

An administrative file that is required to start and run a database system. The control file records the physical structure of the database.

DBA_DATA_FILES

A data dictionary view that displays information about database files. Fields in DBA_DATA_FILES are used to retrieve the value of the rdbmsDbInfoSizeAllocated variable and derive the values of the rdbmsDbInfoSizeAllocated and rdbmsDbInfoSizeUsed variable (in Oracle's implementation of the standard RDBMS MIB (RFC 1565)). Also, some of the variables in the oraDbDataFileTable of the private Oracle Database MIB correspond directly to a single column of DBA_DATA_FILES.

DBA_FREE_SPACE

A data dictionary view that displays information about free extents in all tablespaces. DBA_FREE_SPACE is used to derive the value of the rdbmsDbInfoSizeUsed variable (in Oracle's implementation of the public RDBMS MIB (RFC 1565)).

DBA_TABLESPACES

The dynamic performance table containing measures of tablespace activity for an Oracle7 or Oracle8 database since the last instance startup. Values for each variable in the oraDbTablespaceTable of the Oracle Private Database MIB are retrieved directly from a corresponding variable in DBA_TABLESPACES.

dynamic performance table

See V\$ table.

INIT.ORA configuration file

A database system file containing a list of parameters that are read when the database system is started. The parameters identify the database and control system wide resources. By affecting the size of the SGA, they also impact the performance of the instance. Values for each variable in the oraDbConfigTable of the private Oracle Database MIB are retrieved directly from a corresponding parameter in INIT.ORA.

Interchange

See Oracle MultiProtocol Interchange.

instance

As defined for the Oracle7 and Oracle8 servers, an instance includes the background processes and memory areas required to access an ORACLE database. In SNMP, an instance has a different meaning. For objects that appear in tables, each row in the table represents an instance of that object.

library

A collection of one or more PL/SQL program units that are stored together in a file or database, and that can be referenced by several displays at once.

library cache

A memory structure containing shared SQL and PL/SQL areas. The library cache is one of three parts of the shared pool.

Listener

A protocol independent application listener that receives connections on behalf of applications running over a variety of underlying protocols. The Listener is a component of SQL*Net, Oracle's remote data access product.

managed node

A platform, such as a UNIX server, on which objects to be monitored or managed reside.

managed object

Any entity, device, node, such as a LAN server, gateway, or client application, that can be queried by a management station for its current status.

management application

A software application that can be integrated with a management framework to accomplish more specialized network or database tasks.

management framework

A software package used to view and react to information retrieved using the SNMP protocol. See also management application.

management station

A node from which objects are monitored or managed using the SNMP protocol. Also known as management console, management system or managing node.

master agent

A process that accepts queries from the management framework and communicates with the application in order to answer the query.

MIB

Management Information Base. The collection of variables that can be queried to describe attributes of an object, such as the use, performance, and initialization parameters of a database server, for example.

MultiProtocol Interchange

See Oracle MultiProtocol Interchange.

Names

See Oracle Names.

Network Services MIB

A public MIB (RFC 1565) that contains generic variables designed to apply to all types of network service applications. Oracle has implemented those variables of

this MIB that are relevant to the Oracle7 Server, the Oracle MultiProtocol Interchange, and the Oracle Names products.

object identifier

A sequence of elements, as specified by the SNMP standard (RFC 1442), that uniquely identifies each object. An object identifier (OID) is a sequence of elements that indicates a hierarchical organization of identifiers.

OID

See object identifier.

OID subtree

The portion of a MIB tree that is specific to a given entity. The subtree for the Oracle enterprise is 1.3.6.1.4.1.111. All of the variables in the Oracle MIBs begin with this OID subtree. Also called root OID.

Oracle Database MIB

This private MIB serves to extend the functionality of the public RDBMS MIB. The Oracle Database MIB contains additional RDBMS statistics that are specific to the Oracle7 architecture.

Oracle MultiProtocol Interchange

A product that provides application connectivity across multiple network protocols.

Oracle Names

A product that provides a directory service, by making database address and database link information available to all nodes throughout the network.

Oracle7 and Oracle8 Servers

The relational database management systems (RDBMS) developed and sold by Oracle Corporation. These RDBMS includes the database that stores information, as well as the server software that accesses and manipulates that information.

pin

Execution of an item in the library cache.

RDBMS MIB

A proposed standard MIB for relational databases that has been defined by the IETF Working Group. This MIB allows for database discovery, identification of the database, and characterization of database size and activity level.

registration

The method by which a subagent, acting on behalf of a managed object, such as a listener or an Oracle7 or Oracle8 server, notifies a master agent of two things: first, that it will accept requests from the master agent for information, and second, the list of items (the MIB) for which it will provide information.

server

As defined in RFC 1565 (the standard RDBMS MIB) an independent entity that provides access to one or more databases.

SGA

See Shared Global Area.

Shared Global Area

The shared segment containing temporary data caches used by the Oracle7 and Oracle8 Servers during database operation. The SGA is initialized when the server is started, and unavailable when the server is not running. Also known as System Global Area.

shared pool

The portion of the SGA, created on instance startup, that contains shared memory constructs such as shared SQL areas. A shared SQL area is required to process every unique SQL statement submitted to a database. A single shared SQL area is used by multiple applications that issue the same statement, leaving more shared memory for other uses.

SNMP.ORA

A configuration file for a managed node. SNMP.ORA contains a list of parameters that are read when an Oracle subagent is started.

subagent

A process that receives queries for a particular application from the master agent, and sends the answers back to the master agent.

System Global Area

See Shared Global Area.

V\$ table

A generic term for a virtual table which allows the user to access memory structures within the SGA. V\$ tables can be used to monitor the performance of processes of

an Oracle instance. These tables are also called dynamic performance tables, because they are continuously updated while a database is open and in use. The values of many private Oracle Database MIB variables are retrieved directly from corresponding variables in V\$ tables.

V\$DATABASE

The dynamic performance table containing database information from the control file.

V\$FILESTAT

The dynamic performance table containing file read/write statistics for an Oracle7 database. Some of the variables in the oraDbDataFileTable of the private Oracle Database MIB are retrieved directly from a single column of V\$FILESTAT .

V\$INSTANCE

The dynamic performance table containing information on the state of the current instance.

V\$LIBRARYCACHE

The dynamic performance table containing measures of all library cache activity since the most recent instance startup. Values for each variable in the oraDbLibraryCacheTable of the private Oracle Database MIB are retrieved directly from a corresponding variable in V\$LIBRARYCACHE.

V\$LICENSE

The dynamic performance table containing information on license limits.

V\$ROWCACHE

The dynamic performance table containing measures of all data dictionary activity since the most recent instance startup. Values for each variable of the oraDbRowCacheTable of the private Oracle Database MIB are retrieved directly from a corresponding variable in V\$ROWCACHE.

V\$SESSTAT

The dynamic performance table containing the current statistics on total memory used for each current session. In the multi-threaded server architecture, Oracle stores session information in the shared pool, rather than in the memory of user processes. While no variables in the private Oracle Database MIB correspond directly to those in V\$SESSTAT, V\$SYSSTAT is derived from V\$SESSTAT. See also V\$SYSSTAT.

V\$SGA

The dynamic performance table containing summary information on the System Global Area of an Oracle7 or Oracle8 database. The values of each variable in the oraDbSGATable of the Oracle Private Database MIB are retrieved directly from a corresponding variable in V\$SGA.

V\$SGASTAT

The dynamic performance table containing detailed information on the System Global Area of an Oracle7 or Oracle8 database. Values for each variable in the oraDbSGAStatTable of the private Oracle Database MIB are retrieved directly from a corresponding variable in V\$SGASTAT.

V\$SYSSTAT

The dynamic performance table containing the current *system-wide* value for each variable in V\$SESSTAT. Values for each variable in the oraDbSysTable of the private Oracle Database MIB are retrieved directly from a corresponding variable in V\$SYSSTAT.

V\$VERSION

The dynamic performance table containing version numbers of core library components in the Oracle Server. See also, Library.

Index

A

ADDRESS section
 of LISTENER.ORA file, B-28
Administrative Region, C-8
agents, 1-3
 extensible, 1-6
 intelligent, 1-7
 master, 1-3, 1-6
 monolithic, 1-6
 sub-, 1-3, 1-6
applAccumulatedInboundAssociations
 variable, E-8
applAccumulatedOutboundAssociations
 variable, E-9
applFailedOutboundAssociations variable, E-10
applInboundAssociations variable, E-8
applIndex variable, E-3
applLastChange variable, E-7
applLastInboundActivity variable, E-10
applLastOutboundActivity variable, E-10
applName variable, E-4
applOperStatus variable, E-6
applOutboundAssociations variable, E-8
applRejectedInboundAssociations variable, E-10
applTable, E-1
applUptime variable, E-5
applVersion variable, E-5

B

block changes per transaction
 defined, 3-3
block get rate

 defined, 3-3
block visits per transaction
 defined, 3-3
BYTES in DBA_DATA_FILES, A-28

C

cache hit ratio
 defined, 3-3
call rate
 defined, 3-4
calls per transaction
 defined, 3-4
changed block ratio
 defined, 3-4
configuring
 SNMP with Enterprise Manager, 1-14
Configuring SNMP on UNIX Platforms, 1-12
Configuring SNMP on Windows NT, 1-10
connectionless communication, 1-9
consistent change ratio
 defined, 3-4
CONSISTENT CHANGES in V\$SYSSTAT, A-4
CONSISTENT GETS in V\$SYSSTAT, A-4
continued row ratio
 defined, 3-4

D

database instance performance ratios, 3-3, 3-4
 block changes per transaction, 3-3
 block get rate, 3-3
 cache hit ratio, 3-3
 call rate, 3-4

- calls per transaction, 3-4
- changed block ratio, 3-4
- continue row ratio, 3-4
- library cache miss ratio, 3-4
- most useful, 3-3
- presenting graphically, 3-2
- recursive to user call ratio, 3-5
- redo log space wait ratio, 3-5
- row source ratio, 3-5
- scaling dynamically, 3-2
- sort overflow ratio, 3-5
- transaction rate, 3-5
- user call rate, 3-5
- user calls per parse, 3-6
- user rollback ratio, 3-6
- using a sufficient sample for, 3-1
- DB_BLOCK_CHANGES in V\$SYSSTAT, A-5
- DB_BLOCK_GETS in V\$SYSSTAT, A-6
- DB_BLOCK_BUFFERS in INIT.ORA, A-47, A-50
- DB_BLOCK_CHECKPOINT_BATCH in INIT.ORA, A-48
- DB_BLOCK_SIZE in INIT.ORA, A-30, A-49
- DB_FILE_MULTIBLOCK_READ_COUNT in INIT.ORA, A-50
- DB_FILE_SIMULTANEOUS_WRITES in INIT.ORA, A-49
- DBA_DATA_FILES, A-26
 - defined, 1
- DBA_FREE_SPACE
 - defined, 1
- dedicated server
 - defined, B-13
- designing management applications, 3-1
- dispatcher
 - defined, B-16
- DISTRIBUTED_LOCK_TIMEOUT in INIT.ORA, A-50
- DISTRIBUTED_RECOVERY_CONNECTION_HOLD_TIME in INIT.ORA, A-51
- DISTRIBUTED_TRANSACTIONS in INIT.ORA, A-52

E

Explanation element

- meaning in appendices, 4-1
- extensible agents, 1-6

F

FILE_ID in DBA_DATA_FILES, A-26
FILE_NAME in DBA_DATA_FILES, A-27
frameworks, 1-3

G

GETHITS in V\$LIBRARYCACHE, A-35, A-39
GETS in V\$LIBRARYCACHE, A-34, A-39

I

INIT.ORA configuration file

- defined, 2
- MTS_LISTENER_ADDRESS parameter, B-20

instance

- defined, 2

instrumentation, 1-8
intelligent agents, 1-7
INVALIDATIONS in V\$LIBRARYCACHE, A-38, A-42

K

keyboard shortcuts, general Windows platform, G-1

L

library

- defined, 2

library cache

- defined, 2
- MIB table for, A-32

library cache miss ratio

- defined, 3-4

Listener

- MIB, B-1

listener

- definition, B-1

LISTENER.ORA configuration file, B-3

- ADDRESS section, B-28

- LOG_DIRECTORY parameter, B-7
- PASSWORDS_listener_name parameter, B-6
- SID_NAME parameter, B-11
- TRACE_FILE parameter, B-8
- LOG_ARCHIVE_BUFFER_SIZE in INIT.ORA, A-52
- LOG_ARCHIVE_BUFFERS in INIT.ORA, A-53
- LOG_BUFFER in INIT.ORA, A-53
- LOG_CHECKPOINT_INTERVAL in INIT.ORA, A-54
- LOG_DIRECTORY parameter, B-7
- LOG_FILES in INIT.ORA, A-55
- LOG_INTERVAL_TIMEOUT in INIT.ORA, A-55
- LONG_TABLE_THRESHOLD in INIT.ORA, A-18

M

- managed elements, 1-3, 1-6
- managed nodes, 1-6
- management application
 - defined, 3
- management applications, 1-5
 - tips for designing, 3-1
- management consoles, 1-3
- management framework
 - defined, 3
- management frameworks, 1-3
- Management Information Bases, 1-3
- management stations, 1-3
- management systems, 1-3
- managing nodes, 1-3
- mapping the network, 1-5
- master agent
 - configuring, 1
 - defined, 3
- master agents, 1-3, 1-6
- MAX_ROLLBACK_SEGMENTS in INIT.ORA, A-56
- Max-Access element
 - meaning in appendices, 4-1
- MIB objects, 1-8
- MIB variables
 - scaling dynamically, 3-2
- MIBs, 1-3
 - defined, 1-8, 3

- Listener MIB, B-1
- Oracle Database MIB, A-1
- Oracle Names MIB, C-1
 - private, 1-8
 - public Network Services MIB, E-1
 - public RDBMS MIB, D-1
 - reading variable descriptions, 4-1
 - standard hierarchy, 1-8
 - structure of, 1-8
 - variables, 1-8
- monolithic agents, 1-6
- MTS_LISTENER_ADDRESS parameter, B-20
- MTS_MAX_DISPATCHERS in INIT.ORA, A-56
- MTS_MAX_SERVERS in INIT.ORA, A-57
- MTS_SERVERS in INIT.ORA, A-58

N

- NAME in V\$TABLESPACE, A-22
- Names MIB
 - see Oracle Names MIB, C-1
- NAMES.ORA configuration file, C-1, C-7
- NAMESPACE in V\$LIBRARYCACHE, A-34
- NAMES.TRACE_LEVEL field, C-2
- network listener, B-1
- NEXT_EXTANT in DBA_TABLES, A-25
- nodes
 - managed, 1-6

O

- Object Identifiers, 1-8
- OID
 - defined, 4
- OID subtree
 - defined, 4
- OIDs, 1-8
- OPEN_CURSORS in INIT.ORA, A-58
- OPEN_LINKS in INIT.ORA, A-59
- operating systems
 - SNMP support and, 1-10
- OPTIMIZER_MODE in INIT.ORA, A-59
- oraAgentEventArguments, F-7
- oraAgentEventID, F-3
- oraAgentEventIndex, F-2

oraAgentEventMessage, F-7
 oraAgentEventName, F-2
 oraAgentEventOcc, F-9
 oraAgentEventResults, F-8
 oraAgentEventService, F-4
 oraAgentEventSeverity, F-5
 oraAgentEventTable, F-1
 oraAgentEventTime, F-4
 Oracle
 MIB
 Listener, B-1
 Oracle Database MIB, A-1
 Oracle Enterprise Manager, 1-7
 relationship with SNMP, 1-7
 Oracle Multiprotocol Interchange
 defined, 4
 Oracle Names
 configuration parameters, C-6
 defined, 4
 operational status, C-17
 Oracle Names MIB, C-1
 Oracle7 Server
 defined, 4
 oraDbConfigDbArchiveLogBuffers variable, A-53
 oraDbConfigDbBlockBuffers variable, A-47
 oraDbConfigDbBlockCkptBatch variable, A-48
 oraDbConfigDbBlockSize variable, A-48
 oraDbConfigDbFilesSimWrites variable, A-49
 oraDbConfigDbMultiBlockReadCount
 variable, A-50
 oraDbConfigDiskLockTimeout variable, A-50
 oraDbConfigDistRecoveryConnectHold
 variable, A-51
 oraDbConfigDistTransactions variable, A-51
 oraDbConfigLogArchiveBufferSize variable, A-52
 oraDbConfigLogBuffer variable, A-53
 oraDbConfigLogCheckpointInterval variable, A-54
 oraDbConfigLogCheckpointTimeout
 variable, A-54
 oraDbConfigLogFiles variable, A-55
 oraDbConfigMaxRollbackSegments variable, A-56
 oraDbConfigMTSMaxDispatchers variable, A-56
 oraDbConfigMTSMaxServers variable, A-57
 oraDbConfigMTSServers variable, A-57
 oraDbConfigOpenCursors variable, A-58
 oraDbConfigOpenLinks variable, A-59
 oraDbConfigOptimizerMode variable, A-59
 oraDbConfigProcesses variable, A-60
 oraDbConfigSerializable variable, A-61
 oraDbConfigSessions variable, A-61
 oraDbConfigSharedPool variable, A-62
 oraDbConfigSortAreaRetainedSize variable, A-63
 oraDbConfigSortAreaSize variable, A-63
 oraDbConfigTable, A-45
 oraDbConfigTransactions variable, A-64
 oraDbConfigTransactionsPerRollback
 variable, A-64
 oraDbDataFileDiskReadBlocks variable, A-29
 oraDbDataFileDiskReads variable, A-28
 oraDbDataFileDiskReadTimeTicks variable, A-31
 oraDbDataFileDiskWrites variable, A-29
 oraDbDataFileDiskWriteTimeTicks variable, A-31
 oraDbDataFileDiskWrittenBlocks variable, A-30
 oraDbDataFileIndex variable, A-26
 oraDbDataFileSizeAllocated variable, A-28
 oraDbDatFileName variable, A-27
 oraDbDatFileTable, A-25
 oraDbLibraryCacheGetHits variable, A-35
 oraDbLibraryCacheGets variable, A-34
 oraDbLibraryCacheIndex variable, A-33
 oraDbLibraryCacheInvalidations variable, A-37
 oraDbLibraryCacheNameSpace variable, A-34
 oraDbLibraryCachePinHits variable, A-36
 oraDbLibraryCachePins variable, A-35
 oraDbLibraryCacheReloads variable, A-37
 oraDbLibraryCacheSumGetHits variable, A-39
 oraDbLibraryCacheSumGets variable, A-38
 oraDbLibraryCacheSumInvalidations
 variable, A-42
 oraDbLibraryCacheSumPinHits variable, A-40
 oraDbLibraryCacheSumPins variable, A-40
 oraDbLibraryCacheSumReloads variable, A-41
 oraDbLibraryCacheSumTable, A-38
 oraDbLibraryCacheTable, A-32
 oraDbSGADatabaseBuffers variable, A-44
 oraDbSGAFixedSize variable, A-43
 oraDbSGARedoBuffers variable, A-45
 oraDbSGATable, A-42
 oraDbSGAVariableSize variable, A-44
 oraDbSysConsistentChanges variable, A-3

oraDbSysContact variable, A-4
 oraDbSysDbBlockChanges variable, A-5
 oraDbSysDbBlockGets variable, A-6
 oraDbSysFreeBufferInspected variable, A-6
 oraDbSysFreeBufferRequested variable, A-7
 oraDbSysParseCount variable, A-8
 oraDbSysPhysReads variable, A-8
 oraDbSysPhysWrites variable, A-9
 oraDbSysRedoEntries variable, A-10
 oraDbSysRedoLogSpaceRequests variable, A-10
 oraDbSysRedoSyncWrites variable, A-11
 oraDbSysSortsDisk variable, A-12
 oraDbSysSortsMemory variable, A-12
 oraDbSysSortsRows variable, A-13
 oraDbSysTable, A-2
 oraDbSysTableFetchContinuedRow variable, A-15
 oraDbSysTableFetchRowid variable, A-14
 oraDbSysTableScanBlocks variable, A-15
 oraDbSysTableScanRows variable, A-16
 oraDbSysTableScansLong variable, A-17
 oraDbSysTableScansShort variable, A-17
 oraDbSysUserCalls variable, A-18
 oraDbSysUserCommits variable, A-19
 oraDbSysUserRollbacks variable, A-19
 oraDbSysWriteRequests variable, A-20
 oraDbTablespaceIndex variable, A-21
 oraDbTablespaceLargestAvailableChunk
 variable, A-25
 oraDbTablespaceName variable, A-22
 oraDbTablespaceSizeAllocated variable, A-23
 oraDbTablespaceSizeUsed variable, A-23
 oraDbTablespaceState variable, A-24
 oraDbTablespaceTable, A-21
 oraDedicatedSrvEstablishedConnections
 variable, B-15
 oraDedicatedSrvIndex variable, B-14
 oraDedicatedSrvRejectedConnections
 variable, B-15
 oraDedicatedSrvTable, B-13
 oraDispatcherCurrentConnections variable, B-18
 oraDispatcherEstablishedConnections
 variable, B-17
 oraDispatcherIndex variable, B-17
 oraDispatcherMaximumConnections
 variable, B-19
 oraDispatcherProtocolInfo variable, B-20
 oraDispatcherRejectedConnections variable, B-18
 oraDispatcherState variable, B-20
 oraDispatcherTable, B-16
 orAgentTraps, F-9
 oraListenAddress variable, B-28
 oraListenAddressIndex variable, B-27
 oraListenAddressTable, B-27
 oraListenerContact variable, B-9
 oraListenerIndex variable, B-2
 oraListenerLogFile, B-7
 oraListenerName variable, B-3
 oraListenerNumberOfServices variable, B-9
 oraListenerParameterFile variable, B-6
 oraListenerSecurityLevel variable, B-6
 oraListenerState variable, B-4, B-8
 oraListenerStateChange variable, B-29
 oraListenerTable, B-1
 oraListenerTraceFile, B-8
 oraListenerTraceLevel variable, B-5
 oraListenerTraps, B-28
 oraListenerUptime variable, B-5
 oraListenerVersion variable, B-3
 oraNamesConfigAdminRegion variable, C-8
 oraNamesConfigAuthorityRequired variable, C-9
 oraNamesConfigAutoRefreshExpire variable, C-9
 oraNamesConfigAutoRefreshRetry variable, C-10
 oraNamesConfigCacheCheckpointFile
 variable, C-11
 oraNamesConfigCacheCheckpointInterval
 variable, C-11
 oraNamesConfigDefaultForwardersOnly
 variable, C-12
 oraNamesConfigForwardingAvailable
 variable, C-13
 oraNamesConfigForwardingDesired
 variable, C-14
 oraNamesConfigLogStatsInterval variable, C-14
 oraNamesConfigMaxReforwards variable, C-15
 oraNamesConfigNoModifyRequests variable, C-15
 oraNamesConfigResetStatsInterval variable, C-16
 oraNamesConfigServerName variable, C-17
 oraNamesConfigTable, C-6
 oraNamesServerAdminRegion variable, C-28
 oraNamesServerAliasLoopsDetected

variable, C-22
 oraNamesServerCorruptMessagesReceived
 variable, C-20
 oraNamesServerCreatedOnLookup variable, C-23
 oraNamesServerExactMatches variable, C-24
 oraNamesServerForwardFailures variable, C-25
 oraNamesServerForwardTimeouts variable, C-25
 oraNamesServerLookupFailures variable, C-23
 oraNamesServerLookupsAttempted variable, C-22
 oraNamesServerName variable, C-28
 oraNamesServerQueriesReceived variable, C-19
 oraNamesServerQueriesTotalTime variable, C-20
 oraNamesServerReloadCheckFailures
 variable, C-27
 oraNamesServerRequestsForwarded
 variable, C-26
 oraNamesServerResponsesReceived variable, C-26
 oraNamesServerResponsesSent variable, C-21
 oraNamesServerTable, C-17
 oraNamesTnsContact variable, C-5
 oraNamesTnsLogFile variable, C-3
 oraNamesTnsParameter variable, C-3
 oraNamesTnsReload variable, C-5
 oraNamesTnsRunningTime variable, C-6
 oraNamesTnsTable, C-1
 oraNamesTnsTraceFile variable, C-4
 oraNamesTnsTraceLevel variable, C-2
 oraPrespawndSrvCurrentConnections
 variable, B-24
 oraPrespawndSrvEstablishedConnections
 variable, B-23
 oraPrespawndSrvIndex variable, B-22
 oraPrespawndSrvMaximumConnections
 variable, B-24
 oraPrespawndSrvProcessorID variable, B-26
 oraPrespawndSrvProtocolInfo variable, B-26
 oraPrespawndSrvRejectedConnections
 variable, B-23
 oraPrespawndSrvState variable, B-25
 oraPrespawndSrvTable, B-21
 oraRepDisabledTriggers variable, A-66
 oraRepInvalidPackages variable, A-67
 oraRepLinkAdminRequests variable, A-79
 oraRepLinkDeferredTransactions variable, A-78
 oraRepLinkErrors variable, A-78

oraRepLinkIndex variable, A-76
 oraRepLinkName variable, A-77
 oraRepLinkTable, A-76
 oraRepMasterSchemaOtherMasters, A-74
 oraRepMasterSchemaRequestErrors variable, A-72
 oraRepMasterSchemaResolvedConflicts
 variable, A-73
 oraRepMasterSchemaTable, A-72
 oraRepPending2PhaseCommits variable, A-65
 oraRepSchemaIndex variable, A-68
 oraRepSchemaLinks, A-71
 oraRepSchemaName variable, A-69
 oraRepSchemas variable, A-67
 oraRepSchemaStatus variable, A-70
 oraRepSchemaTable, A-68
 oraRepSchemaType variable, A-70
 oraRepSnapshotSchemaMaster variable, A-75
 oraRepSnapshotSchemaSnapshots variable, A-75
 oraRepSnapshotSchemaTable, A-74
 oraRepTable, A-65
 oraSIDcurrentlyConnectedClients variable, B-12
 oraSIDListenerIndex variable, B-11
 oraSIDName variable, B-11
 oraSIDReservedConnections variable, B-13
 oraSIDTable, B-10

P

packets
 recovering lost, 1-9
 PARSE COUNT in V\$SYSSTAT, A-8
 PASSWORDS_listener_name parameter, B-6
 performance ratios
 see database instance performance ratios, 3-1
 PGA memory, A-63
 PHYBLKRD in V\$FILESTAT, A-30
 PHYBLKWRT in V\$FILESTAT, A-30
 PHYRDS in V\$FILESTAT, A-28
 PHYSICAL READS in V\$SYSSTAT, A-8
 PHYSICAL WRITES in V\$SYSSTAT, A-9
 PHYWRTS in V\$FILESTAT, A-29
 pin
 defined, 4
 PINHITS in V\$LIBRARYCACHE, A-36, A-41
 PINS in V\$LIBRARYCACHE, A-36, A-40

- platforms
 - management, 1-3
- polls, 1-3
- prespawnd server
 - defined, B-21
- private MIB
 - Listener, B-1
 - Oracle Database MIB, A-1
 - Oracle Names MIB, C-1
- PROCESSES in INIT.ORA, A-50, A-60, A-62, A-64
- protocols
 - between master and subagents, 1-6
 - implementing SNMP, 1-10

R

- ratios
 - see database instance performance ratios, 3-1
- rdbmsDbContact variable, D-5
- rdbmsDbIndex variable, D-2
- rdbmsDbInfoProductName variable, D-6
- rdbmsDbInfoSizeAllocated variable, D-8
- rdbmsDbInfoSizeUnits variable, D-7
- rdbmsDbInfoSizeUsed variable, D-9
- rdbmsDbInfoTable, D-5
- rdbmsDbInfoVersion variable, D-7
- rdbmsDbName variable, D-4
- rdbmsDbPrivateMibOID variable, D-3
- rdbmsDbTable, D-2
- rdbmsDbVendorName variable, D-3
- rdbmsRelState variable, D-25
- rdbmsRelTable, D-24
- rdbmsSrvContact variable, D-12
- rdbmsSrvInfoDiskReads variable, D-15
- rdbmsSrvInfoDiskWrites variable, D-16
- rdbmsSrvInfoFinishedTransactions variable, D-14
- rdbmsSrvInfoHighwaterInboundAssociations variable, D-20
- rdbmsSrvInfoLogicalReads variable, D-16
- rdbmsSrvInfoMaxInboundAssociations variable, D-20
- rdbmsSrvInfoPageReads variable, D-18
- rdbmsSrvInfoPageWrites variable, D-18
- rdbmsSrvInfoRequestsHandled variable, D-19
- rdbmsSrvInfoStartupTime variable, D-14

- rdbmsSrvInfoTable, D-13
- rdbmsSrvParamCurrValue variable, D-23
- rdbmsSrvParamName variable, D-22
- rdbmsSrvParamSubIndex variable, D-23
- rdbmsSrvParamTable, D-21
- rdbmsSrvPrivateMibOID variable, D-10
- rdbmsSrvProductName variable, D-11
- rdbmsSrvTable, D-9
- rdbmsSrvVendorName variable, D-11
- rdbmsStateChange trap, D-26
- rdbmsTraps, D-25
- READTIM in V\$FILESTAT, A-31, A-32
- recursive to user call ratio
 - defined, 3-5
- REDO ENTRIES in V\$SYSSTAT, A-10
- REDO LOG SPACE REQUESTS in V\$SYSSTAT, A-11
- redo log space wait ratio
 - defined, 3-5
- REDO SYNC WRITES in V\$SYSSTAT, A-11
- Related Variables element
 - meaning in appendices, 4-2
- RELOADS in V\$LIBRARYCACHE, A-37, A-41
- replication, A-65
- repositories, 1-4
- row source ratio
 - defined, 3-5

S

- schemas
 - replication of, A-65
- SERIALIZABLE in INIT.ORA, A-61
- server
 - defined, 5
- Server Manager, 1-2
- SESSIONS in INIT.ORA, A-60, A-61
- SGA
 - defined, 5
 - definition, A-42
- Shared Global Area
 - defined, 5
- shared pool
 - defined, 5
 - monitoring, A-32

SHARED_POOL_SIZE in INIT.ORA, A-62
SID_NAME parameter, B-11
Significance element
 meaning in appendices, 4-2
SMALL_TABLE_THRESHOLD in INIT.ORA, A-17
SNMP
 defined, 1-3
 operating system support of, 1-10
 Oracle products supporting, 1-10
SNMP traps
 about, F-1
snmp.contact.listener_name, B-10
snmp.index.listener-name parameter, B-11
snmp.index.listenername parameter, B-2
SNMP.ORA, 5
SNMP.ORA configuration file
 LISTENER_CONTACT parameter, B-10
 snmp.index.listener-name parameter, B-2, B-11
sort overflow ratio
 defined, 3-5
SORT_AREA_RETAINED_SIZE in
 INIT.ORA, A-63
SORT_AREA_SIZE in INIT.ORA, A-63
SORTS DISKS in V\$SYSSTAT, A-12
SORTS MEMORY in V\$SYSSTAT, A-13
SORTS ROWS in V\$SYSSTAT, A-13
SQL*Net, C-1
STATUS element
 of SNMP MIB definition, Version 2, 4-1
Status element
 meaning in appendices, 4-1
STATUS in V\$TABLESPACE, A-24
subagent
 defined, 5
subagents, 1-3, 1-6
Suggested Presentation element
 meaning in appendices, 4-2
Syntax element
 meaning in appendices, 4-1
sysUpTime
 used to derive oraListenerUpTime value, B-5

T

TABLE FETCH BY ROWID in V\$SYSSTAT, A-14

TABLE FETCH CONTINUED ROW in
 V\$SYSSTAT, A-15
TABLE SCAN BLOCKS GOTTEN in
 V\$SYSSTAT, A-15
TABLE SCAN ROWS GOTTEN in
 V\$SYSSTAT, A-16
TABLE SCANS LONG TABLES in
 V\$SYSSTAT, A-17
TABLE SCANS SHORT TABLES in
 V\$SYSSTAT, A-17
TIMED_STATISTICS in INIT.ORA, A-31, A-32
TRACE_FILE parameter, B-8
transaction rate
 defined, 3-5
TRANSACTIONS in INIT.ORA, A-64
TRANSACTIONS_PER_ROLLBACK_SEGMENT in
 INIT.ORA, A-65
traps, 1-3
tuning database server performance, 3-3
Typical Range element
 meaning in appendices, 4-1

U

user call rate
 defined, 3-5
USER CALLS in V\$SYSSTAT, A-18
user calls per parse
 defined, 3-6
USER COMMITS in V\$SYSSTAT, A-19
user rollback ratio
 defined, 3-6
USER ROLLBACKS in V\$SYSSTAT, A-20

V

V\$ table
 defined, 5
V\$DATABASE table
 defined, 6
V\$FILESTAT table, A-26, 6
V\$INSTANCE table
 defined, 6
V\$LIBRARYCACHE table, A-33
 defined, 6

VSLICENSE table
 defined, 6
VSPARAMETER table, A-45
VSROWCACHE table
 defined, 6
VSSESSTAT table
 defined, 6
VSSGA table, A-43
 defined, 7
VSSGASTAT table
 defined, 7
VSSYSSTAT table, A-2
 defined, 7
VSVERSION table
 defined, 7
variables, A-32
 reading descriptions of, 4-1
 see MIB variables, 3-2

W

WRITE REQUESTS in VSSYSSTAT, A-20

