

Oracle® Application Server

Adapter for J.D. Edwards OneWorld User's Guide

10g Release 2 (10.1.2)

B14059-03

April 2006

Oracle Application Server Adapter for J.D. Edwards OneWorld User's Guide, 10g Release 2 (10.1.2)

B14059-03

Copyright © 2006, Oracle. All rights reserved.

Primary Author: Ivanka J. Stoycheva

Contributors: Vishal Saxena, Sunil Gopal, Sheela Vasudevan

The Programs (which include both the software and documentation) contain proprietary information; they are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright, patent, and other intellectual and industrial property laws. Reverse engineering, disassembly, or decompilation of the Programs, except to the extent required to obtain interoperability with other independently created software or as specified by law, is prohibited.

The information contained in this document is subject to change without notice. If you find any problems in the documentation, please report them to us in writing. This document is not warranted to be error-free. Except as may be expressly permitted in your license agreement for these Programs, no part of these Programs may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose.

If the Programs are delivered to the United States Government or anyone licensing or using the Programs on behalf of the United States Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the Programs, including documentation and technical data, shall be subject to the licensing restrictions set forth in the applicable Oracle license agreement, and, to the extent applicable, the additional rights set forth in FAR 52.227-19, Commercial Computer Software—Restricted Rights (June 1987). Oracle USA, Inc., 500 Oracle Parkway, Redwood City, CA 94065.

The Programs are not intended for use in any nuclear, aviation, mass transit, medical, or other inherently dangerous applications. It shall be the licensee's responsibility to take all appropriate fail-safe, backup, redundancy and other measures to ensure the safe use of such applications if the Programs are used for such purposes, and we disclaim liability for any damages caused by such use of the Programs.

Oracle, JD Edwards, PeopleSoft, and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

The Programs may provide links to Web sites and access to content, products, and services from third parties. Oracle is not responsible for the availability of, or any content provided on, third-party Web sites. You bear all risks associated with the use of such content. If you choose to purchase any products or services from a third party, the relationship is directly between you and the third party. Oracle is not responsible for: (a) the quality of third-party products or services; or (b) fulfilling any of the terms of the agreement with the third party, including delivery of products or services and warranty obligations related to purchased products or services. Oracle is not responsible for any loss or damage of any sort that you may incur from dealing with any third party.

Contents

Preface	vii
Audience	vii
Documentation Accessibility	vii
Related Documents	viii
Conventions	viii
Help Us to Serve You Better	xi
1 Introduction	
Adapter Features	1-1
J.D. Edwards OneWorld Concepts	1-2
Integration with J.D. Edwards OneWorld	1-2
Adapter Architecture	1-5
BSE Versus OracleAS Adapter J2CA Deployment	1-8
2 Configuring OracleAS Adapter for J.D. Edwards One World	
Starting Application Explorer	2-1
Configuring Settings for BSE or J2CA	2-2
Configuring BSE	2-2
Configuring J2CA	2-6
Creating a Repository Configuration	2-7
Creating a Configuration for BSE	2-7
Creating a Configuration for J2CA	2-8
Connecting to a BSE or J2CA Configuration	2-8
Establishing a Connection (Target) for J.D. Edwards OneWorld	2-9
Defining a Target to J.D. Edwards OneWorld	2-9
Creating an XML Schema	2-13
Creating a Request and a Response Schema	2-13
Using GenJava to Generate a Schema	2-14
Generating WSDL (J2CA Configurations Only)	2-14
Creating and Testing a Web Service (BSE Configurations Only)	2-17
Configuring an Event Adapter	2-19
Creating and Editing an Event Port	2-19
Creating and Editing a Channel	2-21
The OneWorld Event Listener	2-24
Configuring the OneWorld Event Listener	2-24

3	OC4J Deployment and Integration	
	Adapter Integration with OC4J	3-1
	Deployment of Adapter	3-1
	Updating Adapter Configuration.....	3-2
	How to Write a Java Application Client Using the CCI API.....	3-4
4	Integration with BPEL Process Manager	
	Overview of Adapter Integration with BPEL Process Manager.....	4-1
	Deployment of Adapter	4-2
	Design Time	4-2
	Design a BPEL Process for Request-Response Service (Outbound)	4-2
	Design a BPEL Process for Event Handling (Inbound).....	4-11
	Invoking Adapter Request-Response Service from BPEL Process Manager	4-15
	Listening to Adapter Events Inside BPEL Process Manager.....	4-19
5	BPEL Process Manager Integration Examples	
	J.D. Edwards OneWorld Service Integration	5-2
	Design-Time Configuration.....	5-2
	Runtime Configuration	5-10
	J.D. Edwards OneWorld Event Integration.....	5-12
	Design-Time Configuration.....	5-12
	Runtime Configuration	5-20
6	InterConnect Integration Examples	
	J.D. Edwards OneWorld Service Integration	6-2
	Design-Time Configuration.....	6-2
	Runtime Configuration	6-12
	J.D. Edwards OneWorld Event Integration.....	6-14
	Design-Time Configuration.....	6-14
	Runtime Configuration	6-21
	Verifying Results.....	6-24
7	Troubleshooting and Error Messages	
	Troubleshooting.....	7-1
	BSE Error Messages	7-4
	General Error Handling in BSE.....	7-4
	Adapter-Specific Error Handling.....	7-5
8	Advanced User Tools	
	Web Services Policy-Based Security	8-1
	Configuring Web Services Policy-Based Security	8-2
	Migrating Repositories.....	8-8

A Configuring J.D. Edwards OneWorld for Outbound Transaction Processing

Specifying Outbound Functionality for a Business Function..... A-1
 Outbound Transaction Processing A-1
 The Data Export Control Table and the Processing Log Table A-2
Modifying the OneWorld jde.ini File..... A-2

B Sample Files

Issuing a Single-Function Request B-1
Issuing a Multiple-Function Request..... B-2
Sample Sales Order Request..... B-11
Sample Sales Order Response B-13

Glossary

Index

Preface

This Preface contains these topics:

- Audience
- Documentation Accessibility
- Related Documents
- Conventions
- Help Us to Serve You Better

Audience

Oracle Application Server Adapter for J.D. Edwards OneWorld User's Guide is intended for those who perform the following tasks:

- Install applications
- Maintain applications

To use this document, you need to know how to install and configure Oracle BPEL Process Manager.

Documentation Accessibility

Our goal is to make Oracle products, services, and supporting documentation accessible, with good usability, to the disabled community. To that end, our documentation includes features that make information available to users of assistive technology. This documentation is available in HTML format, and contains markup to facilitate access by the disabled community. Accessibility standards will continue to evolve over time, and Oracle is actively engaged with other market-leading technology vendors to address technical obstacles so that our documentation can be accessible to all of our customers. For more information, visit the Oracle Accessibility Program Web site at

<http://www.oracle.com/accessibility/>

Accessibility of Code Examples in Documentation

Screen readers may not always correctly read the code examples in this document. The conventions for writing code require that closing braces should appear on an otherwise empty line; however, some screen readers may not always read a line of text that consists solely of a bracket or brace.

Accessibility of Links to External Web Sites in Documentation

This documentation may contain links to Web sites of other companies or organizations that Oracle does not own or control. Oracle neither evaluates nor makes any representations regarding the accessibility of these Web sites.

TTY Access to Oracle Support Services

Oracle provides dedicated Text Telephone (TTY) access to Oracle Support Services within the United States of America 24 hours a day, seven days a week. For TTY support, call 800.446.2398.

Related Documents

For more information, refer to these Oracle resources:

- *Oracle Application Server Adapter Concepts*
- *Oracle Application Server Adapters Installation Guide*

Printed documentation is available for sale in the Oracle Store at

<http://oraclestore.oracle.com/>

To download free release notes, installation documentation, white papers, or other collateral, please visit the Oracle Technology Network (OTN). You must register online before using OTN; registration is free and can be done at

<http://www.oracle.com/technology/membership/>

If you already have a user name and password for OTN, then you can go directly to the documentation section of the OTN Web site at

<http://www.oracle.com/technology/documentation/>

Conventions

This section describes the conventions used in the text and code examples of this documentation set. It describes:

- Conventions in Text
- Conventions in Code Examples
- Conventions for Windows Operating Systems

Conventions in Text

We use the following conventions in text to help you more quickly identify special terms. The table also provides examples of their use.

Convention	Meaning	Example
Bold	Bold typeface indicates terms that are defined in the text or terms that appear in a glossary, or both.	When you specify this clause, you create an index-organized table .
<i>Italics</i>	Italic typeface indicates book titles or emphasis.	<i>Oracle Database Concepts</i> Ensure that the recovery catalog and target database do <i>not</i> reside on the same disk.

Convention	Meaning	Example
UPPERCASE monospace (fixed-width) font	Uppercase monospace typeface indicates elements supplied by the system. Such elements include parameters, privileges, datatypes, Recovery Manager keywords, SQL keywords, SQL*Plus or utility commands, packages and methods, as well as system-supplied column names, database objects and structures, user names, and roles.	You can specify this clause only for a NUMBER column. You can back up the database by using the BACKUP command. Query the TABLE_NAME column in the USER_TABLES data dictionary view. Use the DBMS_STATS.GENERATE_STATS procedure.
lowercase monospace (fixed-width) font	Lowercase monospace typeface indicates executable programs, filenames, directory names, and sample user-supplied elements. <i>Note:</i> Some programmatic elements use a mixture of UPPERCASE and lowercase. Enter these elements as shown.	Enter sqlplus to start SQL*Plus. The password is specified in the orapwd file. Back up the datafiles and control files in the /disk1/oracle/dbs directory. The department_id, department_name, and location_id columns are in the hr.departments table. Connect as oe user. The JRepUtil class implements these methods.
lowercase italic monospace (fixed-width) font	Lowercase italic monospace font represents placeholders or variables.	You can specify the <i>parallel_clause</i> . Run <i>old_release.SQL</i> where <i>old_release</i> refers to the release you installed prior to upgrading.

Conventions in Code Examples

Code examples illustrate SQL, PL/SQL, SQL*Plus, or other command-line statements. They are displayed in a monospace (fixed-width) font and separated from normal text as shown in this example:

```
SELECT username FROM dba_users WHERE username = 'MIGRATE';
```

The following table describes typographic conventions used in code examples and provides examples of their use.

Convention	Meaning	Example
[]	Anything enclosed in brackets is optional.	DECIMAL (<i>digits</i> [, <i>precision</i>])
{ }	Braces are used for grouping items.	{ENABLE DISABLE}
	A vertical bar represents a choice of two options.	{ENABLE DISABLE} [COMPRESS NOCOMPRESS]
...	Ellipsis points mean repetition in syntax descriptions. In addition, ellipsis points can mean an omission in code examples or text.	CREATE TABLE ... AS <i>subquery</i> ; SELECT <i>col1</i> , <i>col2</i> , ... , <i>coln</i> FROM employees;
Other symbols	You must use symbols other than brackets ([]), braces ({}), vertical bars (), and ellipsis points (...) exactly as shown.	acctbal NUMBER(11,2); acct CONSTANT NUMBER(4) := 3;
<i>Italics</i>	Italicized text indicates placeholders or variables for which you must supply particular values.	CONNECT SYSTEM/ <i>system_password</i> DB_NAME = <i>database_name</i>

Convention	Meaning	Example
UPPERCASE	Uppercase typeface indicates elements supplied by the system. We show these terms in uppercase in order to distinguish them from terms you define. Unless terms appear in brackets, enter them in the order and with the spelling shown. Because these terms are not case sensitive, you can use them in either UPPERCASE or lowercase.	<pre>SELECT last_name, employee_id FROM employees; SELECT * FROM USER_TABLES; DROP TABLE hr.employees;</pre>
lowercase	<p>Lowercase typeface indicates user-defined programmatic elements, such as names of tables, columns, or files.</p> <p>Note: Some programmatic elements use a mixture of UPPERCASE and lowercase. Enter these elements as shown.</p>	<pre>SELECT last_name, employee_id FROM employees; sqlplus hr/hr CREATE USER mjones IDENTIFIED BY ty3MU9;</pre>

Conventions for Windows Operating Systems

The following table describes conventions for Windows operating systems and provides examples of their use.

Convention	Meaning	Example
Click Start , and then choose the <i>menu item</i>	How to start a program.	To start the Database Configuration Assistant, click Start , and choose Programs . In the Programs menu, choose Oracle - HOME_NAME and then click Configuration and Migration Tools . Choose Database Configuration Assistant .
File and directory names	File and directory names are not case sensitive. The following special characters are not allowed: left angle bracket (<), right angle bracket (>), colon (:), double quotation marks ("), slash (/), pipe (), and dash (-). The special character backslash (\) is treated as an element separator, even when it appears in quotes. If the filename begins with \\, then Windows assumes it uses the Universal Naming Convention.	c:\winnt\\"system32 is the same as C:\WINNT\SYSTEM32
C:\>	Represents the Windows command prompt of the current hard disk drive. The escape character in a command prompt is the caret (^). Your prompt reflects the subdirectory in which you are working. Referred to as the <i>command prompt</i> in this manual.	C:\oracle\oradata>
Special characters	The backslash (\) special character is sometimes required as an escape character for the double quotation mark (") special character at the Windows command prompt. Parentheses and the single quotation mark (') do not require an escape character. Refer to your Windows operating system documentation for more information on escape and special characters.	C:\>exp HR/HR TABLES=employees QUERY=\"WHERE job_id='SA_REP' and salary<8000\"

Convention	Meaning	Example
<i>HOME_NAME</i>	Represents the Oracle home name. The home name can be up to 16 alphanumeric characters. The only special character allowed in the home name is the underscore.	<code>C:\> net start OracleHOME_NAME_TNSListener</code>
<i>ORACLE_HOME</i> and <i>ORACLE_BASE</i>	<p>In releases prior to Oracle8i release 8.1.3, when you installed Oracle components, all subdirectories were located under a top level <i>ORACLE_HOME</i> directory.</p> <p>This release complies with Optimal Flexible Architecture (OFA) guidelines. All subdirectories are not under a top level <i>ORACLE_HOME</i> directory. There is a top level directory called <i>ORACLE_BASE</i> that by default is <code>C:\oracle\product\10.1.0</code>. If you install the latest Oracle release on a computer with no other Oracle software installed, then the default setting for the first Oracle home directory is <code>C:\oracle\product\10.1.0\db_n</code>, where <i>n</i> is the latest Oracle home number. The Oracle home directory is located directly under <i>ORACLE_BASE</i>.</p> <p>All directory path examples in this guide follow OFA conventions.</p> <p>Refer to <i>Oracle Database Installation Guide for Windows</i> for additional information about OFA compliances and for information about installing Oracle products in non-OFA compliant directories.</p>	Change to the <i>ORACLE_BASE\ORACLE_HOME\rdbms\admin</i> directory.

Help Us to Serve You Better

To help our consultants answer your questions effectively, please be prepared to provide specifications and sample files and to answer questions about errors and problems.

The following list includes the specifications our consultants require.

- **Platform:**
- **Operating System:**
- **Operating System Version:**
- **Product List:**
- **Adapters:**
- **Adapter Deployment:**
For example, *J2CA* or *Business Services Engine (BSE)*
- **Container Version:**

The following table lists components. Specify the version in the column provided.

Component	Version
Adapter	
EIS (DBMS/APP)	
HOTFIX/Service Pack	

In the following table, specify the JVM version and vendor.

JVM Version	Vendor

The following table lists additional questions to help us serve you better.

Request/Question	Error/Problem Details or Information
Provide usage scenarios or summarize the application that produces the problem.	
Has this happened previously?	
Can you reproduce this problem consistently?	
Any change in the application environment : software configuration, EIS/database configuration, application, and so on?	
Under what circumstance does the problem <i>not</i> occur?	
Describe the steps to reproduce the problem.	
Describe the problem .	
Specify the error message(s).	

The following is a list of error or problem files that might be applicable.

- XML schema
- XML instances
- Other input documents (transformation)
- Error screen shots
- Error output files
- Trace and log files
- Log transaction

Introduction

OracleAS Adapter for J.D. Edwards OneWorld provides connectivity and carries out interactions on a J.D. Edwards OneWorld system. This chapter provides information about OracleAS Adapter for J.D. Edwards OneWorld to help you accomplish your integration projects.

This chapter discusses the following topics:

- [Adapter Features](#)
- [J.D. Edwards OneWorld Concepts](#)
- [Integration with J.D. Edwards OneWorld](#)
- [Adapter Architecture](#)
- [BSE Versus OracleAS Adapter J2CA Deployment](#)

Adapter Features

OracleAS Adapter for J.D. Edwards OneWorld provides a means to exchange real-time business data between J.D. Edwards OneWorld systems and other applications, databases, or external business partner systems. The **adapter** enables inbound and outbound processing with J.D. Edwards OneWorld.

OracleAS Adapter for J.D. Edwards OneWorld can be deployed as a J2EE Connector Architecture (J2CA) 1.0 resource adapter. This deployment is referred to as OracleAS J2CA adapter. It can also be deployed as a Web services servlet and is referred to as OracleAS Adapter Business Services Engine (BSE).

OracleAS Adapter for J.D. Edwards OneWorld uses XML messages to enable non-J.D. Edwards applications to communicate and exchange transactions with J.D. Edwards using services and events. Services and events are described as follows:

- **Services:** Enables applications to initiate a J.D. Edwards business event.
- **Events:** Enables applications to access J.D. Edwards data only when a J.D. Edwards business event occurs.

To support event functionality, the following two features are implemented:

- **Port:** A **port** associates a particular business object exposed by an adapter with a particular disposition. A disposition defines the protocol and location of the event data. The port defines the end point of the event consumption.

The port is an Oracle adapter component that pushes the event received from the Enterprise Information System (EIS) to the adapter client. The port supported in this release is Remote Method Invocation (RMI).

Note: You are not required to create or configure ports for use with BPEL Process Manager. However, in this release you can associate an event schema to a port under a J2CA configuration. See "[J2CA Filtering Port Option for Integration with BPEL Process Manager](#)" on page 2-21 for details on using ports under a J2CA configuration.

- Channel: A **channel** represents configured connections to particular instances of back-end or other types of systems. A channel binds one or more event ports to a particular **listener** managed by the adapter.

The channel is the adapter component that receives events in real time from the Enterprise Information System (EIS) application. The channel component can be a File reader, an HTTP listener, a TCP/IP listener, or an FTP listener. A channel is always EIS specific. The adapter supports multiple channels for a particular EIS. This enables the user to choose the optimal channel component based on deployment requirements.

OracleAS Adapter for J.D. Edwards OneWorld provides:

- XML schemas for the J2CA 1.0 resource adapter.
- Web services for BSE.

See Also: *Oracle Application Server Adapter Concepts*

J.D. Edwards OneWorld Concepts

You can use OracleAS Adapter for J.D. Edwards OneWorld to call a J.D. Edwards OneWorld Master Business Function, such as Address Book, Purchase Order, and Sales Order. You can also use the adapter as a part of an integration effort to connect OneWorld with non-OneWorld systems.

OracleAS Adapter for J.D. Edwards OneWorld can receive an XML document, or it can run one or more J.D. Edwards Master Business Functions (MBF) by passing an XML document into OneWorld through the J.D. Edwards OneWorld ThinNet API.

Integration with J.D. Edwards OneWorld

J.D. Edwards OneWorld supports multiple methods and technologies to provide interoperability. The three supported entry points are:

- Flat files
- Database tables
- Master Business Function (MBF) interactive calls

You configure Oracle AS Adapter to send requests to J.D. Edwards OneWorld. The agent processes requests for J.D. Edwards OneWorld Master Business Functions (MBF), embedded in XML documents, and forwards them to a back-end J.D. Edwards OneWorld system. The resulting response information is then returned and processed for further routing.

OracleAS Adapter for J.D. Edwards OneWorld can receive an XML request document from a client and call a specific function in the target Enterprise Information System (EIS). OracleAS Adapter for J.D. Edwards OneWorld acts as a consumer of request messages and provides a response. An agent performs the following functions:

- Receives requests from a legacy system, another EIS, or a non-EIS client.
- Transforms the XML request document into the EIS-specific format.
 - The request document conforms to a request XML schema.
 - The schema is based on metadata in the EIS.
- Calls the underlying function in the EIS and waits for its response.
- Transforms the response from the EIS-specific data format to an XML document.
 - The response document conforms to a response XML schema for the agent.
 - The schema is based on metadata in the EIS.

You can configure a listener, known as a channel, for the adapter to receive messages from J.D. Edwards OneWorld. The information the listener receives is used to build an XML record and is forwarded to any specified disposition for further processing.

Listeners are consumers of EIS-specific messages and may or may not provide a response. A listener performs the following functions:

- Receives messages from an EIS client
- Transforms the EIS-specific message format into an XML format.
 - The XML format conforms to an XML schema.
 - The schema is based on metadata in the EIS.

Propagating External Listeners into J.D. Edwards OneWorld

When integrating external listeners into OneWorld using flat file input, the files are imported through a batch program and placed on an unedited transaction table. The records on the transaction table are processed by a batch program that makes calls to the appropriate MBF.

The database table method bypasses the first step in the flat file method, and records are written directly to the unedited transaction table. The records on the transaction table are processed by a batch program that makes calls to the appropriate MBF.

The third method, calling the MBF directly, bypasses the batch processing completely and provides synchronous access to OneWorld.

Propagating Internal Listeners out of J.D. Edwards OneWorld

Integrating a J.D. Edwards OneWorld listener with external systems is similar to the inbound process, except in reverse. The Data Export Control table maintains the determination of whether a transaction must be integrated with an external system. When a transaction must be integrated, the MBF handles logging of all additions, changes, and deletions to the unedited transaction table. After the transaction information is written to the table, a key for that record is sent from the MBF to the subsystem data queue.

The subsystem data queue triggers the processing of the new record by launching an outbound subsystem batch process that is generic and handles all outbound transactions. The outbound subsystem then accesses the Data Export Control table to determine the configured external subscriber to run.

J.D. Edwards OneWorld Interoperability Framework

J.D. Edwards OneWorld enables integration with systems through its interoperability framework. The adapter uses the OneWorld framework and leverages various integration access methods to provide the greatest amount of flexibility and functionality.

OracleAS Adapter for J.D. Edwards OneWorld supports the following integration access methods:

- J.D. Edwards OneWorld ThinNet API
- J.D. Edwards OneWorld XML
- J.D. Edwards unedited transaction tables (Z tables)

Figure 1–1 illustrates the inbound processing framework.

The agent uses the J.D. Edwards OneWorld ThinNet API to communicate with the OneWorld application. Using the ThinNet API, the agent can run one or more MBF in a single Unit Of Work (UOW). When any of the MBF fail, the entire UOW fails, preventing partial updates. Validation of data, business rules, and communications to the underlying database are handled by the OneWorld application because the agent runs the MBF.

Figure 1–1 J.D. Edwards OneWorld Inbound Processing


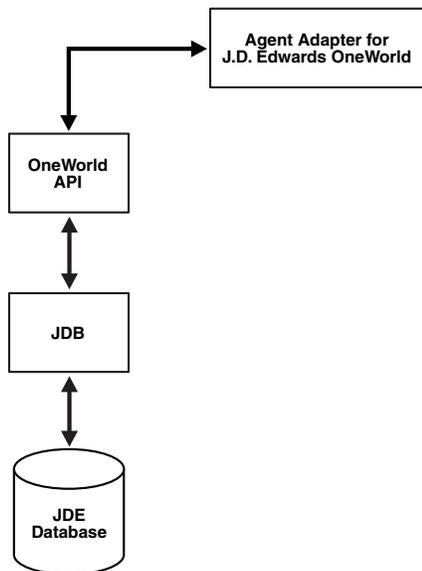


Figure 1–2 illustrates the outbound processing framework.

Figure 1–2 J.D. Edwards OneWorld Outbound Processing

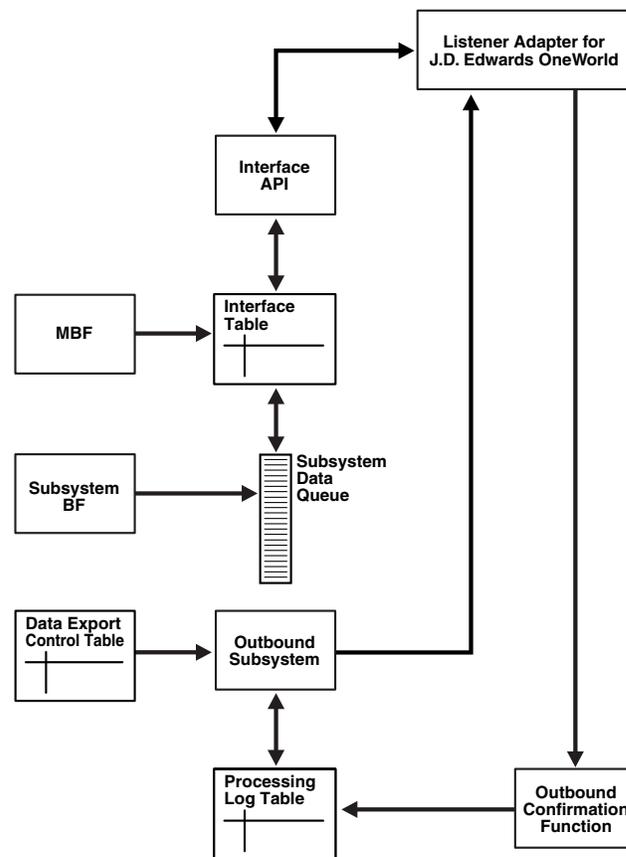

In the outbound process, the event starts when a specific MBF is executed in the J.D. Edwards OneWorld environment. The MBF writes the required information for the event into the appropriate interface table and then notifies the subsystem Batch Function (BF) that an event occurred. The subsystem BF then places an entry about the event on the Subsystem Data Queue.

The outbound subsystem retrieves the data queue entry and looks in the Data Export Control table for the external processes to notify. The outbound subsystem then calls the Oracle Application Server Adapter for J.D. Edwards OneWorld listener with notification. The listener passes the notification to the generator. The generator then uses the J.D. Edwards OneWorld ThinNet API to retrieve the appropriate information from the interface table.

Adapter Architecture

OracleAS Adapter for J.D. Edwards OneWorld works with Application Explorer in conjunction with one of the following components:

- Oracle Application Server Adapter Business Services Engine (BSE)
- Enterprise Connector for J2EE Connector Architecture (J2CA)

OracleAS Adapter Application Explorer (Application Explorer)

Application Explorer is used to configure database connections and create Web services and events. It can be configured to work in a Web services environment in conjunction with BSE or with the Enterprise Connector for J2EE Connector

Architecture (J2CA). When working in a J2CA environment, the connector uses the Common Client Interface (CCI) to provide fast integration services using Adapters instead of using Web services.

Both BSE and the connector for J2CA are deployed to an application server with Application Explorer and the adapters.

Application Explorer uses an explorer metaphor for browsing the J.D. Edwards OneWorld system for business functions. Application Explorer enables you to create XML schemas and Web services for the associated business function.


Resource Adapters

OracleAS Adapter for J.D. Edwards OneWorld is a J2CA-based component also known as resource adapter. Resource adapters connect applications that were not originally designed to communicate with each other. Adapters are bidirectional, that is, they can send requests to an Enterprise Information System (EIS), as well as receive notification of events occurring in an EIS.

Oracle Application Server Adapter Business Services Engine (BSE) Architecture

Figure 1-3 shows the generic architecture for the Oracle Web service adapter for packaged applications. The adapter works in conjunction with BSE, as deployed to a Web container in a J2EE application server.

Figure 1-3 OracleAS Adapter Business Services Engine (BSE) Architecture

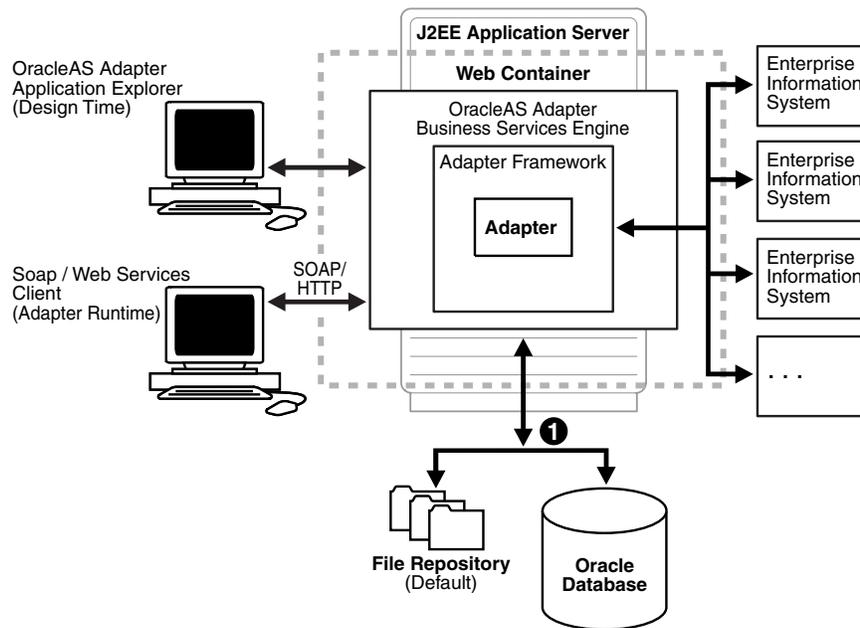

① Use either the default file repository or an Oracle database as your repository.

Note: Do not use a file repository for BSE in production environments.


Application Explorer, a design-time tool deployed along with BSE, is used to configure adapter connections, browse EIS objects, configure services, and configure listeners to listen for EIS events. Metadata created while you perform these operations are stored in the repository by BSE.

BSE uses SOAP as a protocol for receiving requests from clients, interacting with the EIS, and sending responses from the EIS back to clients. BSE receives the adapter response, wraps the response XML in a SOAP envelope, and returns it to the adapter bridge. The bridge then strips the SOAP envelope, strips the namespace prefix, if present, and passes the DTD-compliant XML to the IC Adapter agent.

Oracle Application Server Adapter Generic J2CA Architecture

Figure 1–4 shows the generic architecture for Oracle J2CA adapter for packaged applications. The J2CA connector is deployed to a standard J2CA Container and serves as host container to the adapters. The connector is configured with a repository.

Figure 1–4 OracleAS Adapter Generic J2CA Architecture

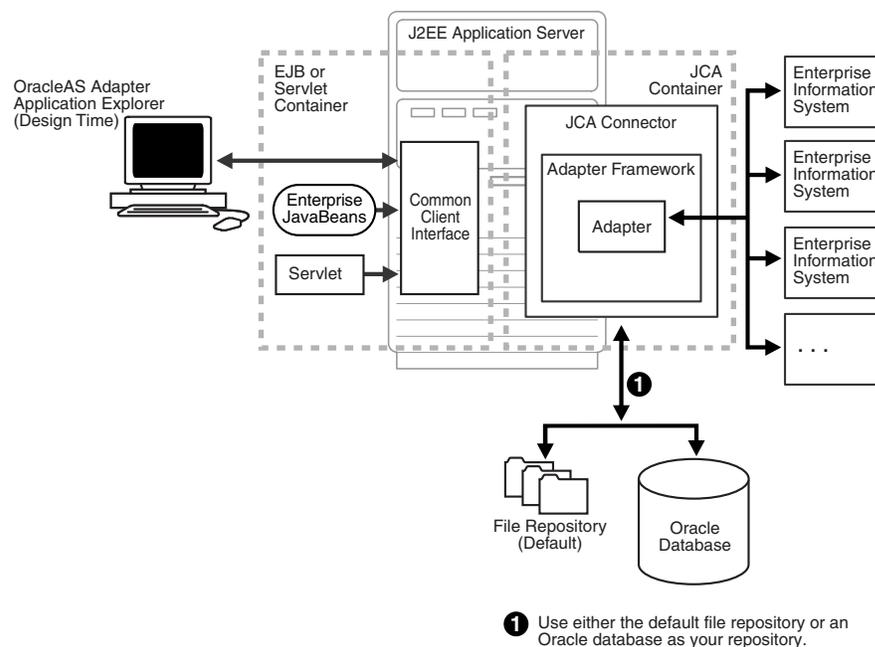

Application Explorer, a design tool that works in conjunction with the connector, is used to configure adapter connections, browse EIS objects, configure services, and configure listeners to listen for EIS events. Metadata created during these operations is stored in the repository by the connector. The repository can be a file system or an Oracle database. It is deployed as a RAR file and has an associated deployment descriptor called `ra.xml`. You can create multiple connector factories by editing the OC4J deployment descriptor `oc4j-ra.xml`. See [Chapter 3, "OC4J Deployment and Integration"](#) for more information on OC4J deployment.

Processing Business Functions

OracleAS Adapter for J.D. Edwards OneWorld enables the processing of OneWorld business functions through the J.D. Edwards OneWorld ThinNet API. Using the API eliminates the requirement of creating complex and impractical batch processes. In addition, a transport layer, such as IBM MQSeries, File, or HTTP is not required because an **agent** or a listener is defined through a TCP connection.

External applications that access OneWorld through OracleAS Adapter for J.D. Edwards OneWorld use either XML schemas or Web services to pass data between the external application and the adapter. [Chapter 2, "Configuring OracleAS Adapter for J.D. Edwards One World"](#) describes how to use Application Explorer to create XML schemas and Web services for the J.D. Edwards Master Business Functions (MBF) used with the adapter.

See Also:

- *Oracle Application Server Adapter Concepts*
- *Oracle Application Server Adapters Installation Guide*

BSE Versus OracleAS Adapter J2CA Deployment

If you are using OracleAS Adapter for J.D. Edwards OneWorld with BPEL Process Manager, please note that:

- Only OracleAS Adapter J2CA deployment supports inbound integration (event notification) with BPEL Process Manager.
- Both OracleAS Adapter J2CA and BSE deployments support outbound integration (request-response service) with BPEL Process Manager.

The following three factors explain the differences between deploying BSE and OracleAS Adapter J2CA. Understanding the factors can help in selecting a deployment option.

1. BSE is the preferred deployment option because it:
 - Can be deployed in a separate instance of Oracle Application Server.
 - Provides better distribution of load.
 - Provides better isolation from any errors from third party libraries.
 - Provides better capability to isolate issues for debugging purposes.
 - Conforms more closely to the Service Oriented Architecture (SOA) model for building applications.
2. OracleAS Adapter J2CA provides slightly better performance.

OracleAS Adapter J2CA does provide slightly better performance than BSE. However, the difference decreases as the transaction rate increases.
3. OracleAS Adapter J2CA and the BSE option both provide identity propagation at runtime.

The BSE option provides the capability to pass identity using the SOAP header. For OracleAS Adapter J2CA, user name and password can be passed using the connection specification of the CCI.

Configuring OracleAS Adapter for J.D. Edwards One World

This chapter describes how to use OracleAS Adapter Application Explorer (Application Explorer) to define a target to connect to a J.D. Edwards OneWorld system, view system objects, and create XML schemas and Web services. This chapter also explains how to configure an event adapter.

This chapter discusses the following topics:

- Starting Application Explorer
- Configuring Settings for BSE or J2CA
- Creating a Repository Configuration
- Establishing a Connection (Target) for J.D. Edwards OneWorld
- Creating an XML Schema
- Generating WSDL (J2CA Configurations Only)
- Creating and Testing a Web Service (BSE Configurations Only)
- Configuring an Event Adapter

Starting Application Explorer

To start Application Explorer:

1. Start the server where Application Explorer is deployed.
2. From the Windows **Start** menu, select **Programs, OracleAS_home Adapters**, and then **Application Explorer**.

On Windows, `iaexplorer.bat` is located under `OracleAS_home\adapters\application\tools`, where `OracleAS_home` is the directory where Oracle Application Server is installed.

On UNIX, load the `iwae` script, `iwae.sh`, located under `OracleAS_home/adapters/application/tools`, where `OracleAS_home` is the directory where Oracle Application Server is installed.

Application Explorer starts. You can now define new targets to your Enterprise Information System (EIS).

Configuring Settings for BSE or J2CA

Before a repository configuration can be created, you must configure OracleAS Adapter Business Services Engine (BSE). You need not configure the Connector for J2CA because the `ra.xml` file is configured automatically during installation.

Configuring BSE

After BSE is deployed to Oracle Application Server, you can configure it through the BSE configuration page.

To configure BSE:

1. Display the following page in your browser:

`http://hostname:port/ibse`

Where `hostname` is the host name of Oracle Application Server and `port` is the HTTP port for Oracle Application Server.

For example,

`http://localhost:7777/ibse`

Note: The first time you access this page, it may take time to load.

2. Log on when prompted.

When first installed, the user ID and the password are:

- User name: `iway`
- Password: `iway`

The BSE configuration page is displayed.

Property Name	Property Value
System	
Language	English
Adapter Lib Directory	<code>../adapters/application/lib</code>
Encoding	UTF-8
Debug Level	NONE
Number of Async. Processors	0
Security	
Admin User	<code>iway</code>
Admin Password	••••
Policy	<input type="checkbox"/>
Repository	
Repository Type	File System
Repository Url	<code>file://\oracle\oraAS10gRC2\q2ee\hor</code>

3. Ensure that the Adapter Lib Directory parameter specifies the path to the lib directory, for example:

`OracleAS_home\adapters\application\lib`

After you specify the path, adapters in the lib directory are available to BSE.

4. For security purposes, enter a new password in the **Admin Password** field.

Note: The **Repository URL** field specifies where the file system repository is located. To use a database repository, you must enter the repository connection information. For the initial verification, use a file system repository. See "[Configuring an Oracle Repository](#)" on page 2-6 for information on switching to a database repository.

5. Click **Save**.

Configuring BSE System Settings

To configure BSE system settings:

1. Display the BSE configuration page by entering the following URL in a browser:

`http://hostname:port/ibse/IBSEConfig`

Where `hostname` is the machine where BSE is installed and `port` is the port number on which BSE is listening.

Note: The server to which BSE is deployed must be running.

The BSE configuration page is displayed, as shown in the following figure.

Property Name	Property Value
System	
Language	English
Adapter Lib Directory	<ORACLE_HOME>\adapters\applicat
Encoding	UTF-8
Debug Level	NONE
Number of Async. Processors	0

2. Configure the system settings according to the information in the following table.

Parameter	Description
Language	Specify the required language.
Adapter Lib Directory	Enter the full path to the directory where the adapter jar files reside.
Encoding	Specify the default encoding from one of the following options: <ul style="list-style-type: none"> ■ UTF-8 ■ EBCDIC-CP-US ■ ISO-8859-1 ■ Shift JIS ■ UNICODE
Debug Level	Specify the debug level from one of the following options: <ul style="list-style-type: none"> ■ None ■ Fatal ■ Error ■ Warning ■ Info ■ Debug
Number of Async. Processors	Select the number of asynchronous processors.

The following image shows the Security pane of the BSE configuration page.

Security

Admin User:

Admin Password:

Policy:

3. Configure the security settings according to the information in the following table.

Parameter	Description
Admin User	Provide a BSE administrator ID.
Admin Password	Enter the password associated with the BSE administrator ID.
Policy	Select the check box to enable policy security.

The following image shows the Repository pane of the BSE configuration page.

Repository	
Repository Type	File System <input type="button" value="v"/>
Repository Url	file://<ORACLE_HOME>\adapters\la
Repository Driver	<input type="text"/>
Repository User	<input type="text"/>
Repository Password	<input type="text"/>
Repository Pooling	<input type="checkbox"/>

BSE requires a repository to store transactions and metadata required for the delivery of Web services. For more information, see "[Configuring a File System Repository](#)" on page 2-5 and "[Configuring an Oracle Repository](#)" on page 2-6.

- Configure the repository settings according to the information in the following table.

Parameter	Description
Repository Type	Select one of the following repositories from the list: <ul style="list-style-type: none"> Oracle. File. (Do not use a file repository for BSE in production environments.)
Repository URL	Enter the URL to use when opening a connection to the database.
Repository Driver	Provide the driver class to use when opening a connection to the database (optional).
Repository User	Enter the user ID to use when opening a connection to the database.
Repository Password	Enter the password associated with the user ID.
Repository Pooling	Select the check box to enable pooling.

- Click **Save**.

Configuring a File System Repository

If you do not have access to a database for the repository, you can store repository information in an XML file on your local machine. However, a file system repository is less secure and efficient than a database repository. When BSE is first installed, it is automatically configured to use a file system repository.

Note: Do not use a file repository for BSE in production environments.

The default location for the repository on Windows is:

```
OracleAS_home\config\base\ibserepo.xml
```

On other platforms, use the corresponding location.

If you are using a file system repository, you are not required to configure any additional BSE components.

Configuring an Oracle Repository

To configure an Oracle repository:

1. Contact your database administrator to obtain an Oracle user ID and password to create the BSE repository.

This user ID should have rights to create and modify tables, as well as the ability to create and execute stored procedures.

2. Open a command prompt and navigate to the setup directory. Its default location on Windows is:

```
OracleAS_home\iWay55\etc\setup
```

For other platforms, navigate to the corresponding location.

This directory contains SQL to create the repository tables in the following file:

```
iwse.ora
```

3. Enter the following command:

```
sqlplus userid/password @database @ iwse.ora
```

Configuring J2CA

During the J2CA deployment of OracleAS Adapter for J.D. Edwards OneWorld, OC4J generates a deployment descriptor called `oc4j-ra.xml`. This descriptor provides OC4J-specific deployment information for resource adapters. See [Chapter 3, "OC4J Deployment and Integration"](#) for more information on J2CA deployment and configuration.

No configuration changes are necessary if you are using the default file based repository with J2CA deployment.

Configuring a Database Repository for J2CA

To configure a database repository for J2CA:

1. Execute the `iwse.ora` SQL statement on the machine where the database is installed.
2. Copy the `jcatransport.properties` file to the following directory:

```
OracleAS_home\adapters\application\config\jca_sample
```

3. Uncomment the following fields and enter details for them in the `jcatransport.properties` file. For example:

```
iwafjca.repo.url=jdbc:oracle:thin:@90.0.0.51:1521:orcl
iwafjca.repo.user=scott
iwafjca.repo.password=scott1
```

4. Alter the JDBC driver path in Application Explorer's `lcp`. For example:

```
lcp=..\lib\orabpel-adapters.jar;C:\jdev\jdbc\lib\classes12.jar;C:\jdev\jdbc\lib
\nls_charset12.jar;%lcp%
to
lcp=..\lib\orabpel-adapters.jar;..\..\..\jdbc\lib\classes12.jar;..\..\..\jdbc\l
```

ib\nls_charset12.jar;%lcp%

Creating a Repository Configuration

Before you use Application Explorer with OracleAS Adapter for J.D. Edwards OneWorld, you must create a repository configuration. You can create two kinds of repository configurations, Web services and J2CA, depending on the container to which the adapter is deployed. During design time, the repository is used to store metadata created when using Application Explorer to configure adapter connections, browse EIS objects, configure services, and configure listeners to listen for EIS events. The information in the repository is also referenced at runtime.

A default J2CA repository is created for the default ManagedConnectinFactory. The name of this configuration is `jca_sample`.

See "[Adapter Features](#)" on page 1-1 for more information.

Creating a Configuration for BSE


To create a repository configuration for BSE using Application Explorer, you must first define a new configuration.

Defining a New Configuration for BSE

To define a new configuration for BSE:


1. Right-click **Configurations** and select **New**.

The New Configuration dialog box is displayed.

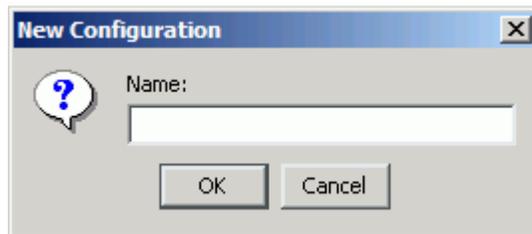

2. Enter a name for the new configuration (for example, `myConfig`) and click **OK**.

The New Configuration dialog box is displayed.

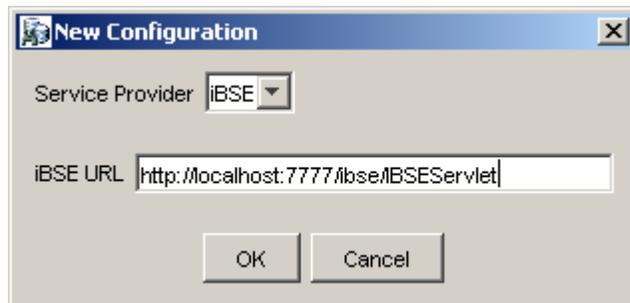

3. From the Service Provider list, select **iBSE**.
4. In the **iBSE URL** field, accept the default URL or replace it with a different URL using the following format:

`http://hostname:port/ibse/IBSEServlet`

Where `hostname` is the machine where your application server resides.

5. Click **OK**.

A node representing the new configuration appears beneath the root Configurations node.




Creating a Configuration for J2CA

To create a configuration for J2CA using Application Explorer, you must first define a new configuration.

Defining a New Configuration for J2CA

To define a new configuration for J2CA:

1. Right-click **Configurations** and select **New**.
The New Configuration dialog box is displayed.
2. Enter a name for the new configuration (for example, `myConfig`) and click **OK**.

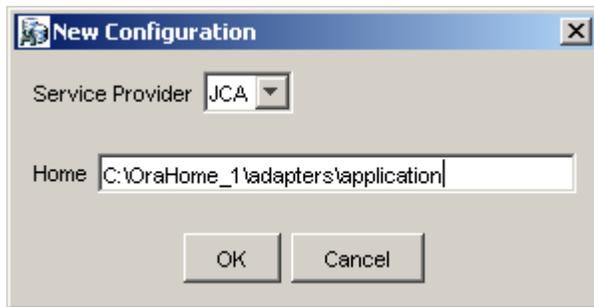

3. From the **Service Provider** list, select **JCA**.
4. In the **Home** field, enter a path to your J2CA configuration directory where the repository, schemas, and other information are stored. This configuration directory is located as follows:

`OracleAS_home\adapters\application`

5. Click **OK**.

A node representing the new configuration appears beneath the root Configurations node.



Connecting to a BSE or J2CA Configuration

To connect to a BSE or J2CA configuration:

1. Right-click the configuration to which you want to connect, for example, `myConfig`.

2. Select **Connect**.

Nodes appear for Adapters, Events, and Business Services (also known as Web services). The Business Services node is only available for BSE configurations. If you are connected to a J2CA configuration, you will not see the Business Services node. The following is an example of a BSE configuration named myConfig:



- Use the **Adapters** folder to create inbound interaction with J.D. Edwards. For example, you use the J.D. Edwards node in the Adapters folder to configure a service that updates J.D. Edwards.
- Use the **Events** folder to configure listeners that listen for events in J.D. Edwards OneWorld.
- Use the **Business Services** folder (available for BSE configurations only) to test Web services created in the Adapters folder. You can also control security settings for the Web services by using the security features of the Business Services folder.

You can now define new targets to J.D. Edwards OneWorld.

Establishing a Connection (Target) for J.D. Edwards OneWorld

Part of the application definition includes adding a target for the adapter. Setting up the target in Application Explorer requires information which is specific to the target.

To browse the available Master Business Functions (MBF), you must first define a target to the system you use. After you define the target, it is automatically saved. You must connect to the system every time you start Application Explorer or after you disconnect.

When you launch Application Explorer, the left pane displays (as nodes) the application systems supported by Application Explorer, based on the adapters that are installed.

Defining a Target to J.D. Edwards OneWorld

To connect to an application system for the first time, you must define a new target.


To define a target:

1. In the left pane, expand the **Adapters** node.

The applications systems supported by Application Explorer appear as nodes based on the adapters that are installed.

2. Right-click the **JDEdwards** node and select **Add Target**.

The Add Target dialog box is displayed.

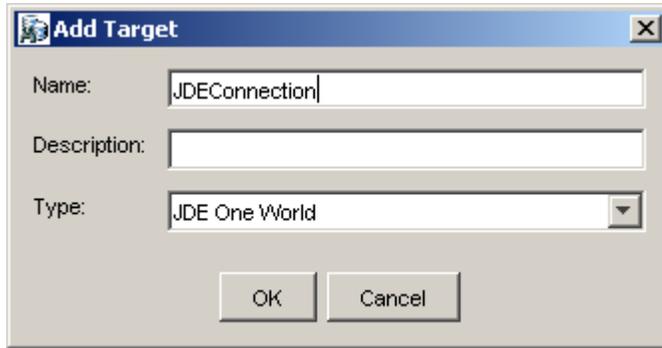

Perform the following steps:

- a. In the **Name** field, enter a descriptive name, for example, JDEConnection.
 - b. In the **Description** field, enter a description for the target (optional).
 - c. From the **Type** list, select **JDE One World**.
3. Click **OK**.

The JDE One World dialog box appears.



- a. In the **Repository** tab, enter the path to the GenJava repository in the Repository directory field.

This is the location of the Java files created by the GenJava program.

Note: Generating agent schemas requires the GenJava repository. For more information on building the J.D. Edwards OneWorld Master Business Function repository, see the *J.D. Edwards Interoperability Guide for OneWorld Xe*.


- b. From the **Schema style** list, select **ELEMENT_STYLE** or **ATTRIBUTE_STYLE**.
- c. Click the **Logon** tab and enter the appropriate information for your target type based on the information in the following table. Fields marked with an asterisk are required.

Repository	Logon
User id*	<input type="text"/>
User password*	<input type="text"/>
JDE Environment*	<input type="text"/>
Application	<input type="text"/>
Server IP address*	<input type="text"/>
Server port *	<input type="text"/>
User role	<input type="text" value="*ALL"/>

Parameter	Description
User id*	A valid user ID for J.D. Edwards OneWorld.
User password*	The password associated with the user ID.
JDE environment*	The J.D. Edwards OneWorld environment, for example, DU7333. For more information about this parameter, see your J.D. Edwards OneWorld documentation or ask your OneWorld system administrator.
Application	XMLInterop or the application name in J.D. Edwards OneWorld. Optional.
Server IP address*	The name of the server on which J.D. Edwards OneWorld is running. This can be the name of the server, for example, JDEOW, or its IP address.
Server Port*	The port number on which the server is listening, for example, 6009.
User role	This property setting depends on your J.D. Edwards system version. <ul style="list-style-type: none"> ■ For B7333: You can leave this field blank. ■ For EnterpriseOne 8.10: You must specify *ALL.

4. Click OK.

After the extraction finishes, the new target, JDEConnection, appears under the JDEdwards node.

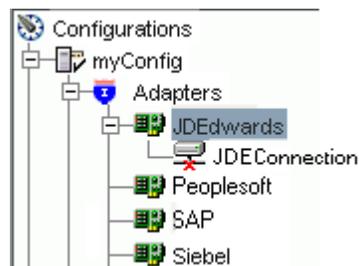

For information on how to create schemas for the adapter, see ["Creating an XML Schema"](#) on page 2-13.

Connecting to a Defined J.D. Edwards OneWorld Target

To connect to a target:

1. Expand the **Service Adapters** node.
2. Expand the **JDEdwards** node.
The disconnected target is displayed.



3. Click the target name (for example, JDEConnection) under the JDEdwards node.
4. Click the **Logon** tab on the right.
The Logon tab displays the values you entered for connection parameters.
5. Verify your connection parameters.
6. Provide the correct password.
7. Right-click the target name and select **Connect**.
The x icon disappears, indicating that the node is connected.



Disconnecting from J.D. Edwards OneWorld

To disconnect from a target:

1. Expand the **Adapters** node.
2. Expand the **JDEdwards** node.
3. Right-click the target to which you are connected (for example, JDEConnection), and select **Disconnect**.
The x icon appears, indicating that the node is disconnected.



Editing a Target

To edit a target:

1. In the left pane, ensure that the target you wish to edit is disconnected.
2. Right-click the target and select **Edit**.
A window is displayed that enables you to edit the existing connection parameters.
3. Modify the target information.
4. Click **OK**.

Deleting a Target

You can delete a target, rather than just disconnecting and closing it. When you delete the target, the node disappears from the list of J.D. Edwards OneWorld targets in the left pane of the explorer.

To delete a target:

1. Expand the **Adapters** node.
2. Expand the **JDEdwards** node.
3. Right-click the target to which you are connected (for example, JDEConnection), and select **Delete**.

The node disappears from the list of available connections.

For information on how to view application system objects, see *J.D. Edwards Interoperability Guide Release OneWorld XE*.

Creating an XML Schema


To execute an MBF, the adapter must receive a request document through the J.D. Edwards OneWorld ThinNet API. The agent processes the request and sends an XML response document indicating the result. Application Explorer creates both the XML request schema and the XML response schema.

Creating a Request and a Response Schema

The following procedure explains how to create request and response schemas for a J.D. Edwards OneWorld business function. Application Explorer enables you to create XML schemas for this function.

1. Connect to a J.D. Edwards OneWorld target as described in "[Connecting to a Defined J.D. Edwards OneWorld Target](#)" on page 2-11.
2. Expand the **Services** node.
3. Expand the node of the MBF for which you want to create the schema.
4. Expand and then select the node beneath the MBF.

The following image shows the tabs that appear on the right.

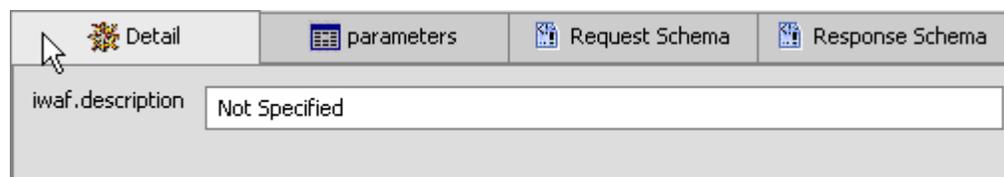


5. Click the **parameters** tab to view the parameter information.

The screenshot shows the 'parameters' tab active, displaying a table with the following data:

Field	Type	MaxLength
szLedgerType	String	3
szUnitsLedg...	String	3
cRetainedEa...	Char	1
cLedgerReq...	Char	1
cIntercompa...	Char	1
cRestateme...	Char	1
szCurrency...	String	4
cDirectBalan...	Char	1

6. Click **Request Schema** to view the request schema information.

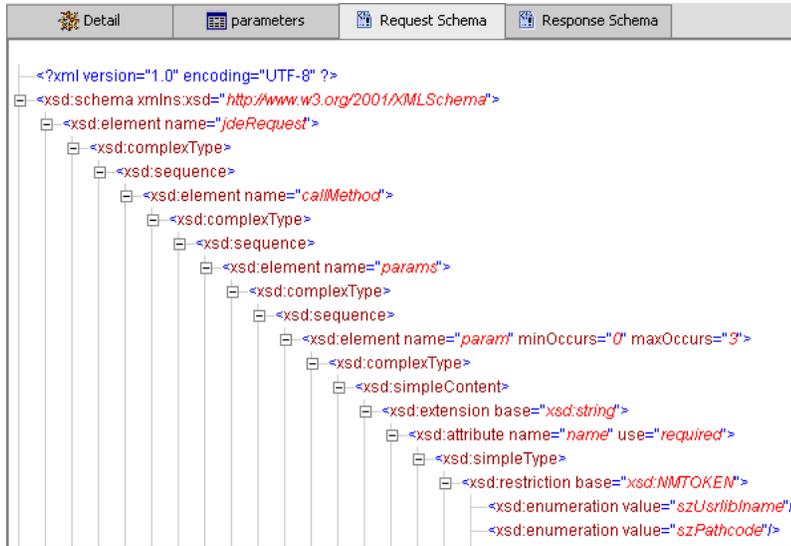

7. Click **Response Schema** to view the response schema information.



Using GenJava to Generate a Schema

To create schemas for the adapter, you must use GenJava wrappers. You create the GenJava wrappers using the OneWorld utility called GenJava. You use Application Explorer to generate schemas against OneWorld GenJava wrappers. GenJava is supplied as a command line process with several runtime options.

See Also: *J.D. Edwards Interoperability Guide for OneWorld Xe*

Generating WSDL (J2CA Configurations Only)


The procedure for generating WSDL (Web Service Definition Language) for request-response (outbound) services differs from that of generating WSDL for event notification (inbound) J2CA services of the adapter. Each procedure is described in detail in the following sections.

Generating WSDL for Outbound Interaction

To generate a WSDL file for request-response service:


1. Start Application Explorer and connect to a defined J.D. Edwards target.
2. Expand **Services**, **JDEJAVA_CFIN**, and then **B0100033**. Select **GetEffectiveAddress**.
3. Right-click **GetEffectiveAddress**.

The following menu is displayed.

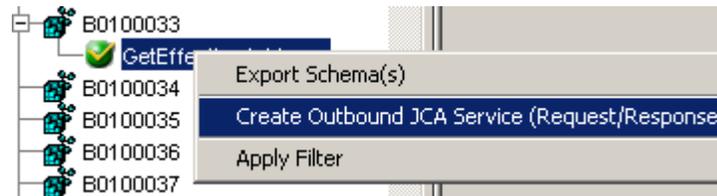

4. Select **Create Outbound JCA Service (Request/Response)**.

The Export WSDL dialog box is displayed.

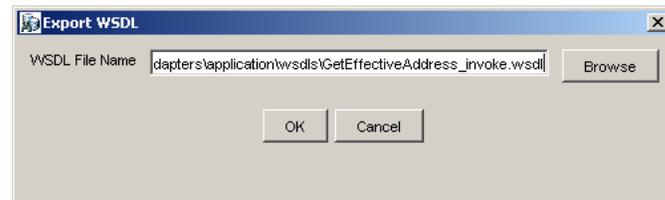

5. Accept the default name and location for the file.

The **.wsdl** file extension is added automatically. By default, the names of WSDL files generated for request-response services end with **_invoke**, while those generated for event notification end with **_receive**.

Note: You can organize your WSDL files in subfolders, creating your own WSDL hierarchy structure. Create the folders under *OracleAS_home\adapters\application\wsdls*. The WSIL browser in JDeveloper will display the full tree structure of your WSDL hierarchy.

6. Click **OK**.

The WSDL file is saved in the specified location.

Generating WSDL for Inbound Interaction

You can create inbound J2CA service only if the node you have selected supports events. To generate a WSDL file:

1. Create a channel in Application Explorer under the J.D. Edwards events node.
2. Start the channel.

Important: Do not restart the BPEL PM Server or Oracle Application Server after the channel is started.

3. Send an inbound message from J.D. Edwards OneWorld.
4. Capture the inbound message payload in the log file located under *OracleAS_home\adapters\application\config\jca_sample\log*

Alternatively, you can create a port with the File protocol under Event in Application Explorer to dispose the event message to the file system.

5. Use a third party tool such as XMLSpy to create the XSD schema using the XML payload captured in the previous step.
6. Verify that `orabpel-adapters.jar` is in your classpath.
7. Open a command prompt and change directory to:
`OracleAS_home\adapters\application\tools`
8. Run `obadapter.bat` to set the environment.
9. Enter the following command to generate WSDL:

```
java oracle.tip.pc.infra.wsil.IWayWSILBrowser jcaHome\jcaConfig adapter target  
channel schemaPrefix wsdlFileName
```

Where:

- `jcaHome` is the path to your J2CA configuration. For example, `OracleAS_home\adapters\application\`
- `jcaConfig` is the JCA configuration created in Application Explorer. The default is `jca_sample`.
- `adapter` is the name of the adapter. For example, `JDEdwards`.
- `target` is the name of the adapter target you created under Adapter in Application Explorer
- `channel` is the name of the channel you have created under Event in Application Explorer
- `schemaPrefix` is the prefix of the XSD schema. The schema file must be in the same directory where the Java command is executed, for example, `OracleAS_home\adapters\application\tools`
- `wsdlFileName` is the name of the WSDL file being created in this procedure

For example:

```
I:\oracle\AS\adapters\application\tools>java  
oracle.tip.pc.infra.wsil.IWayWSILBrowser I:\oracle\AS\adapters\application\  
jca_sample JDEdwards JDE JDE SalesOrder SalesOrder.wsdl
```

Note: It is good practice to append `_receive` to the names of WSDL files generated for event notification services. This will allow you to easily differentiate between them and those generated for request-response services.

10. Stop the channel in Application Explorer.

Note: You can organize your WSDL files in subfolders, creating your own WSDL hierarchy structure. Create the folders under `OracleAS_home\adapters\application\wsdls\`. The WSIL browser in JDeveloper will display the full tree structure of your WSDL hierarchy.

The WSDL you generate using Application Explorer is used in a BPEL process as a Partner Link. This is described in detail in "[J.D. Edwards OneWorld Event Integration](#)" on page 5-12.

Creating and Testing a Web Service (BSE Configurations Only)

You can generate a Web service (also known as a **business service**) using Application Explorer. You can explore the business function repository and generate Web services for the functions you want to use with the adapter. The following procedure uses an example called BusinessUnitExistenceCheck.


Note: In a J2EE Connector Architecture (J2CA) implementation, Web services are not available. When the adapters are deployed to use J2CA, the Common Client Interface (CCI) provides integration services.

Creating a Web Service

To create a Web service for a business function:

1. Expand the **JDEdwards** node and then the **Services** node.
2. Expand the MBF, **B100012**, also called BusinessUnitExistenceCheck.
3. Right-click the node from which you want to create a business service and select **Create Web Service**.

The Create Web Service dialog box is displayed.

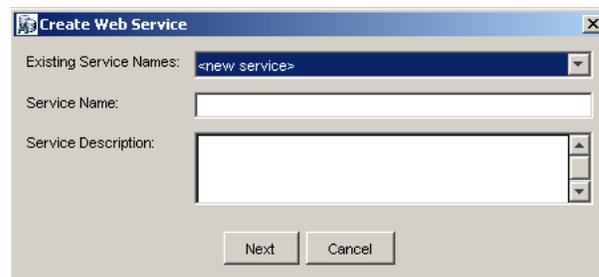

You can add the business function as a method for a new Web service or as a method for an existing one.

- a. From the **Existing Service Names** list, select either **<new service>** or an existing service.
 - b. In the **Service Name** field, specify a service name if you are creating a new service. This name identifies the Web service in the list of services under the Business Services node.
 - c. Enter a description for the service (optional).
4. Click **Next**.

Perform the following steps:

- a. In the **License Name** field, select one or more license codes to assign to the Web service.
- b. In the **Method Name** field, enter a descriptive name for the method or accept the default name.

- c. In the **Description** field, enter a brief description of the method (optional).
- d. In the **DTD Directory** field, specify a location where the Web service will be saved. If you wish to select a location different than the default, click **Browse** and navigate to the desired location.

5. Click **OK**.

Application Explorer switches the view to the Business Services node, and the new Web service appears in the left pane.

Testing a Web Service

After a Web service is created, you can test it to ensure it functions properly. A test tool is provided for testing the Web service.

To test a Web service:

1. Click the **Business Services** node to access your Web services.
2. Expand the **Services** node.
3. Select the name of the business service you want to test.

The business service name appears as a link in the right pane.

4. In the right pane, click the named business services link.

The test option appears in the right pane. If you are testing a Web service that requires XML input, an input field appears.

5. Enter the appropriate input.
6. Click **Invoke**.

Application Explorer displays the results.

```

<?xml version="1.0" encoding="UTF-8" ?>
- <SOAP-ENV:Envelope
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:SOAP-
  ENV="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-
  instance">
- <SOAP-ENV:Body>
  - <AddressUpdateResponse
    xmlns="urn:iwaysoftware:ibse:jul2003:AddressUpda
    cid="BDF3FEF8CD73B26E42CF1722575DFA62">
    - <jdeResponse user="JDE" sessionid=""
      type="callmethod"
      session="604.1078520390.1"
      environment="DV7333">
    - <callMethod app="" trans=""
      name="AddressBookMasterMBF"
      runOnError="">
      <returnCode code="0" />
    - <params>
      <param
        name="cActionCode">U</param>
      <param
        name="cUpdateMasterFile">1</param>
      <param
  
```

Identity Propagation

If you test or execute a Web service using a third party XML editor, for example XMLSPY, the Username and Password values that you specify in the SOAP header must be valid and are used to connect to J.D. Edwards OneWorld. The user name and password values that you provided for J.D. Edwards OneWorld during target creation

using Application Explorer are overwritten for this Web service request. The following is a sample SOAP header that is included in the WSDL file for a Web service:

```
<SOAP-ENV:Header>
  <m:ibsinfo xmlns:m="urn:schemas-iwaysoftware-com:iwse">
    <m:service>String</m:service>
    <m:method>String</m:method>
    <m:license>String</m:license>
    <m:disposition>String</m:disposition>
    <m:Username>String</m:Username>
    <m>Password>String</m>Password>
    <m:language>String</m:language>
  </m:ibsinfo>
</SOAP-ENV:Header>
```

You can remove the `<m:disposition>` and `<m:language>` tags from the SOAP header, since they are not required.

Configuring an Event Adapter

Events are generated as a result of activity in a database or in an application system. You can use events to trigger an action in your application. For example, an update to a database can reflect an update to customer information. If your application must perform when this happens, your application is a consumer of this event.

After you create a connection to your application system, you can add events using Application Explorer. To create an event, you must create a port and a channel.

Note: If you are using a J2CA configuration, you must create a new channel for every event and select this channel when you generate WSDL. Additionally, you are not required to create or configure ports for use with BPEL Process Manager. See "[J2CA Filtering Port Option for Integration with BPEL Process Manager](#)" on page 2-21 for details on using ports under a J2CA configuration.

- A **port** associates a particular business object exposed by the adapter with a particular disposition. A disposition is a URL that defines the protocol and location of the event data. The port defines the end point of the event consumption. For example, you can use the MSMQ protocol to route the result of a Purchase Order update in the J.D. Edwards OneWorld system to a queue hosted by your application server. See "[Creating and Editing an Event Port](#)" on page 2-19 for more information.
- A **channel** represents configured connections to particular instances of back-end systems. A channel binds one or more event ports to a particular listener managed by the adapter. See "[Creating and Editing a Channel](#)" on page 2-21 for more information.

Note: Oracle Containers for J2EE (OC4J) currently conforms to J2CA 1.0, which does not call for event capabilities. When conforming to J2CA 1.0, only service interactions are supported.

Creating and Editing an Event Port

You create event ports from the Events node in Application Explorer.


Note: You are not required to create event ports for J2CA configurations. You must create event ports for BSE configurations only.

Creating an Event Port for RMI

The following procedure describes how to create an event port for RMI from the Events node using Application Explorer.

1. Expand the **Events** node.
2. Expand the **JDEdwards** node.
3. Right-click **Ports** and select **Add Port**.

The Add Port dialog box is displayed.

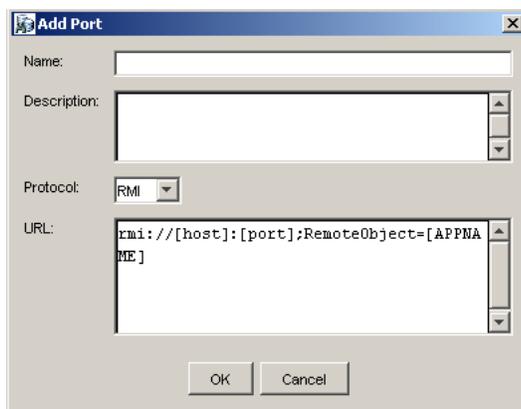

Perform the following steps:

- a. Enter a name for the event port.
- b. Provide a brief description (optional).
- c. From the disposition **Protocol** list, select **RMI**.
- d. In the **URL** field, update the RMI URL. For example:

```
rmi://myRMI_host:1099;RemoteObject=EISAPP
```

The following table defines the parameters for the RMI disposition.

Parameter	Description
host	The name of the machine where the EISAPP adapter will be started.
port	The RMI port on which the iWay bridge is listening. The RMI port is specified in the adapter.ini file of the EISAPP adapter. The default RMI port is 1099.
RemoteObject	Remote Object is the InterConnect adapter name (EISAPP). This InterConnect EISAPP adapter starts the iWay bridge and the RMI server. The name must be in uppercase.

4. Click **OK**.

The port appears under the ports node in the left pane. In the right pane, a table appears that summarizes the information associated with the event port you created.

You are ready to associate the event port with a channel. For more information, see ["Creating and Editing a Channel"](#) on page 2-21.

Editing an Event Port

To edit an event port using Application Explorer:

1. Expand the **Event Adapters** node.
2. Expand the **JDEdwards** node.
3. Right-click the event port you want to edit and select **Edit**.
The Edit Port pane is displayed.
4. Make the necessary edits and click **OK**.

Deleting an Event Port

To delete an event port using Application Explorer:

1. Expand the **Event Adapters** node.
2. Expand the **JDEdwards** node.
3. Right-click the event port you want to delete and select **Delete**.
A confirmation dialog box is displayed.
4. To delete the event port you selected, click **OK**.
The event port disappears from the list in the left pane.

J2CA Filtering Port Option for Integration with BPEL Process Manager

This feature provides the option to use event ports when using OracleAS Adapter for J.D. Edwards OneWorld with BPEL PM under a J2CA configuration. Without this feature, all messages from a particular channel are forwarded to the endpoint and then to the BPEL PM Server. In this case, no schema validation takes place. With the filtering feature, you have the option to associate an event schema to a port that you create and configure in Application Explorer. In this case, at runtime the message is validated against the event schema and only the validated event message is forwarded to the endpoint. If the event message does not match the event schema that is associated to the port, then an error message is written to the log and the event message is ignored.

Creating and Editing a Channel


The following procedure describes how to create a channel for your event. All defined event ports must be associated with a channel.

Note: If you are using a J2CA configuration, you must create a new channel for every event and select this channel when you generate WSDL. Creating a channel is required for both BSE and J2CA configurations.

Creating a Channel

To create a channel:

1. Click **Event Adapters**.
2. Expand the **JDEdwards** node.
The ports and channels nodes appear in the left pane.
3. Right-click **Channels** and select **Add Channel**.
The Add Channel dialog box is displayed.

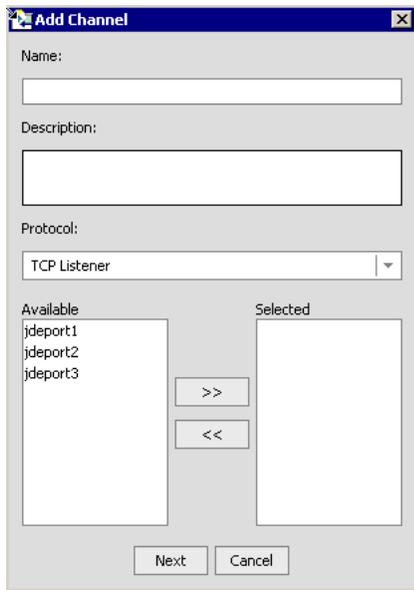

Perform the following steps:

- a. Enter a name for the channel, for example, NewChannel.
 - b. Enter a brief description.
 - c. From the disposition **Protocol** list, select **TCP Listener**.
Important: If you are using BPEL Process Manager with a J2CA configuration without the optional port feature, skip the following two steps. See "[J2CA Filtering Port Option for Integration with BPEL Process Manager](#)" on page 2-21.
 - d. Select an event port from the list of available ports. To select more than one, hold down the **Ctrl** key and select the ports.
 - e. Click **>>** to transfer the port(s) to the list of selected ports.
4. Click **Next**.

The TCP Listener dialog box is displayed with the Basic tab active. Perform the following steps:

- a. Enter the parameters that are specific to your J.D. Edwards environment.
- b. Click the **preparser** tab.
- c. Enter the required parameters.

The following table lists the parameters with their descriptions. Parameters with an asterisk are required.

Parameter	Description
Host*	Name or URL of the machine where the database resides.
Port Number*	Port on which the Host database is listening.
Synchronization Type	Possible values are: RECEIVE_REPLY RECEIVE_ACK RECEIVE
Is Length Prefix	For J.D. Edwards OneWorld events that send data back that is not in XML format. The TCP/IP event application must prefix the data with a 4-byte binary length field when writing the data to the TCP/IP port.
Is XML	For J.D. Edwards OneWorld events that send data back in XML format. No preparer is required.
Is Keep Alive	Maintains continuous communication between the event transaction and the channel.
User id*	A valid user ID for J.D. Edwards OneWorld.
User password*	The password associated with the user ID.
JDE Environment*	The J.D. Edwards OneWorld environment, for example, DU7333. For more information about this parameter, see your J.D. Edwards OneWorld documentation or ask your OneWorld system administrator.
Application	XMLInterop or the application name in J.D. Edwards OneWorld. Optional.
Server IP address*	Name of the server on which J.D. Edwards OneWorld is running. This can be the name of the server, for example, JDEOW, or its IP address, for example, 123.45.67.89.
Server port*	Port number on which the server is listening, for example, 6009.

For additional parameters, see your J.D. Edwards OneWorld Administrator.

5. Click OK.

The channel appears under the channels node in the left pane.



An X over the icon indicates that the channel is currently disconnected. You must start the channel to activate your event configuration.

Note: If you are using OracleAS Adapter for J.D. Edwards OneWorld with BPEL Process Manager, do not start the channel, as it is managed by the BPEL PM Server. If you start the channel for testing and debugging purposes, stop it before runtime.

6. Right-click the channel node and select Start.

The channel becomes active.



The X over the icon disappears.

7. To stop the channel, right-click the connected channel node and select Stop.

The channel becomes inactive and an X appears over the icon.

Editing a Channel

To edit a channel:

1. In the left pane, locate the channel you want to edit.
2. Right-click the channel and select **Edit**.

The Edit channels pane is displayed.

3. Make the required changes to the channel configuration and click **Finish**.

Deleting a Channel

To delete a channel:

1. In the left pane, locate the channel you want to delete.
2. Right-click the channel and select **Delete**.

A confirmation dialog box is displayed.

3. To delete the channel you selected, click **OK**.

The channel disappears from the list in the left pane.

The OneWorld Event Listener

OracleAS Adapter for J.D. Edwards OneWorld Event Listener is designed specifically to provide J.D. Edwards approved access to your OneWorld business events. The OneWorld Event Listener refers to a specialized application that runs in conjunction with OneWorld business functions and is called by the OneWorld application system.

The OneWorld application system provides the Event Listener with the information required to retrieve the event information for only the desired events. For information about configuring the OneWorld environment, see the *J.D. Edwards Interoperability Guide for OneWorld*.

The OneWorld Event Listener is called directly from the OneWorld application and is passed a Z-file record identifier. This identifier then generates a request document that is passed to the server for processing. The server retrieves the event information from the J.D. Edwards OneWorld system and propagates the information for integration with other application systems.

Configuring the OneWorld Event Listener

The OneWorld Event Listener is installed as part of the basic installation. The OneWorld Adapter is automatically installed in the appropriate directory. If the integration server is not installed on the same computer as the J.D. Edwards application server, you must configure the OneWorld Event Listener.

The OneWorld Event Listener is invoked by J.D. Edwards for specific transactions as configured in the OneWorld environment.

The OneWorld Event Listener includes the following components:

- The listener exit (`IWOEvent`), located under `adapters_home\etc\jde`, where `adapters_home` is `OracleAS_home\adapters\application\`. For example:

```
C:\OraHome_1\adapters\application\etc\jde\Iwoevent.dll
```

The file extension varies depending on your operating system:

- For **Windows**, the exit is `Iwoevent.dll`.
 - For **Sun Solaris**, the exit is `libiwoevent.so`.
 - For **HP-UX**, the exit is `libiwoevent.sl`.
 - For **AS/400**, the exit is `iwaysav.sav`.
 - For **IBM AIX**, the exit is `libiwoevent.so`.
 - The listener configuration file (`iwoevent.cfg`).
- See ["Creating the iwoevent.cfg File"](#) on page 2-25 and ["Adding Connection Information"](#) on page 2-25 for more information on this file.
- The outbound agent (`XDJdeOutboundAgent`).

The OneWorld Event listener exit is the function that passes the key fields for a record in the OneWorld outbound transaction tables to the integration server for processing by the outbound agent. The OneWorld Event listener is deployed under the J.D. Edwards OneWorld Enterprise Server. The Java class for the OneWorld Event listener is called `IWOEvent` (the file extension depends on the operating system) and is case-sensitive.

Creating the iwoevent.cfg File

After OneWorld starts the OneWorld Event listener, the listener accesses the configuration file, called `iwoevent.cfg` (case-sensitive). Based on the information in the configuration file, the listener sends the event notification to the integration server. If the integration server is unavailable or some exception occurs, the OneWorld Event listener saves the event information in a file called `batch.log`. After the server becomes available, the listener sends the information. All log information is saved in a file called `iwoevent.log`.

To create the `iwoevent.cfg` file:

1. On the J.D. Edwards OneWorld Server, create an `iwoevent.cfg` file in the defined directory. See ["Adding Connection Information"](#) for information about the contents of this file.
2. Create an environment variable, `IWOEVENT_HOME`, to point to the directory containing the `iwoevent.cfg` file.
 - On Windows: Add `IWOEVENT_HOME` to the system environment variables.
 - On UNIX: Add the following command to your start-up script:

```
export IWOEVENT_HOME =/directory_name
```

Adding Connection Information

The OneWorld Event listener requires connection information for the associated adapter to initiate events properly. This information is contained in the `iwoevent.cfg` file. You must create this file and add the connection information to it. The OneWorld Event Listener requires connection information for the associated integration server to function properly. This information is contained in the `iwoevent.cfg` file. A sample `iwoevent.cfg` file is installed on the J.D. Edwards server and is in the root path. The `iwoevent.cfg` file has three distinct sections:

- **Common**

The common section of the configuration file contains basic configuration options. Currently, only the trace option is supported.

- **Alias**

The alias section of the configuration file contains the connection information required to send transactions to specific servers. The alias values to these entries are as follows:

```
Alias.aliasname={ipaddress|dsn}:port, trace={on|off}
```

Where:

`aliasname` is the symbolic name given to the connection.

`ipaddress|dsn` is the IP address or DSN name for the server containing OracleAS Adapter for J.D. Edwards OneWorld (required).

`port` is the port defined for OracleAS Adapter for J.D. Edwards OneWorld (required).

`trace={on|off}` sets the tracing to on for the particular alias.

■ **Trans**

The trans section of the configuration file contains transaction information required to route J.D. Edwards OneWorld transactions to specified servers.

If a particular J.D. Edwards OneWorld transaction is not defined to an alias, it is sent to all aliases. The trans values to these entries are as follows:

```
trans.jdeTransactionName=alias1,alias2,aliasn
```

Where `jdeTransactionName` is the JDE-defined name for the outbound transaction and `alias1, alias2, aliasn` is the list of aliases to which the transactions are sent.

Adding Connection Information to iwoevent.cfg

To add connection information to the `iwoevent.cfg` file:

1. Add the server and port entries to the `iwoevent.cfg` file.
2. To set the trace option, select **on** or **off**.

```
common.trace=on|off
```

Where `on` sets the tracing to on and `off` sets the tracing to off. Off is the default value.

The following is a sample entry from `iwoevent.cfg` that supplies connection information:

```
common.trace=on
alias.edamcs1=172.1.1.1:3694
alias.edamcs1t=172.1.1.1:3694, trace=on
alias.edamcs2=222.2.2.2:1234
trans.JDESOW=edamcs1t,edamcs2
trans.JDEPOOUT=edamcs1
```

OC4J Deployment and Integration

This chapter describes Oracle Containers for J2EE (OC4J) deployment and integration with OracleAS Adapter for J.D. Edwards OneWorld.

This chapter discusses the following topics:

- [Adapter Integration with OC4J](#)
- [Deployment of Adapter](#)
- [Updating Adapter Configuration](#)
- [How to Write a Java Application Client Using the CCI API](#)

See Also:

- *Oracle Application Server Adapter Concepts*

Adapter Integration with OC4J


OracleAS Adapter for J.D. Edwards OneWorld is deployed within an OC4J container during installation. All client applications run within the OC4J environment. In J2CA deployment, the Common Client Interface (CCI) integrates an OC4J client application with a resource adapter.

See Also:

- *Oracle Application Server Adapters Integration with OC4J in Oracle Application Server Adapter Concepts*

Deployment of Adapter

[Figure 3–1](#) shows deployment of the Connector to the Oracle Application Server. In a runtime service scenario, an Enterprise Java Bean (EJB), Servlet, or Java program client makes CCI calls to J2CA resource adapters. The adapters process the calls as requests and send them to the EIS. The EIS response is then sent back to the client.

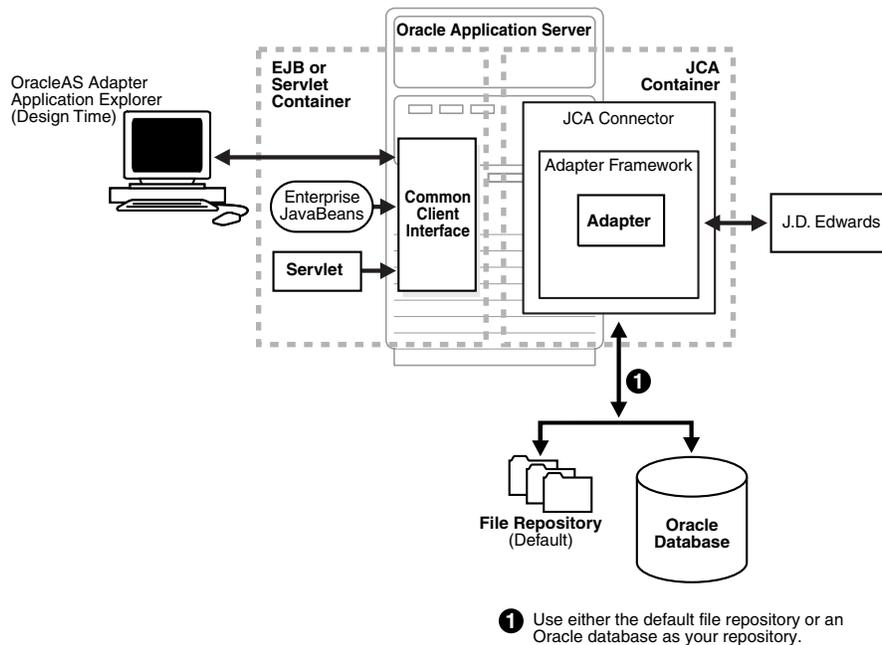Figure 3–1 Oracle Application Server Adapter J2CA Architecture**See Also:**

- *Oracle Application Server Adapter Concepts*

Updating Adapter Configuration

During the J2CA deployment of OracleAS Adapter for J.D. Edwards OneWorld, OC4J generates a deployment descriptor called `oc4j-ra.xml`, located in `OC4J_home\integration\orabpel\system\appserver\oc4j\j2ee\home\application-deployments\default\iwafjca`.

Note: Your installation directory contains more than one file named `oc4j-ra.xml`. The OC4J deployment descriptor described in this section is located in the `OC4J_home\integration\orabpel\system\appserver\oc4j\j2ee\home\application-deployments\default\iwafjca` directory.

Creating a Managed Connector Factory Object

The `oc4j-ra.xml` descriptor provides OC4J-specific deployment information for resource adapters. For example, the default `jca_sample` configuration in Application Explorer is represented in the `oc4j-ra.xml` file as follows:

```
<?xml version="1.0"?>
<!DOCTYPE oc4j-connector-factories PUBLIC "-//Oracle//DTD Oracle Connector
9.04//EN"
"http://xmlns.oracle.com/ias/dtds/oc4j-connector-factories-9_04.dtd">
<oc4j-connector-factories>
  <connector-factory location="eis/OracleJCAAdapter/DefaultConnection"
connector-name="IWAFJCA10">
    <config-property name="IWayHome" value="../../adapters/application"/>
    <config-property name="IWayConfig" value="jca_sample"/>
    <config-property name="IWayRepoURL" value="" />
  </connector-factory>
</oc4j-connector-factories>
```

```

    <config-property name="IWayRepoUser" value="" />
    <config-property name="IWayRepoPassword" value="" />
    <config-property name="logLevel" value="debug" />
  </connector-factory>
</oc4j-connector-factories>

```

The parameters defined in the `oc4j-ra.xml` file are described in the following table:

Parameter Name	Description
IWayHome	The base installation directory for the OracleAS packaged application adapter.
IWayConfig	The adapter configuration name as defined in Application Explorer. For example, OracleAS Adapter for J.D. Edwards OneWorld has a preconfigured <code>jca_sample</code> configuration in Application Explorer.
IWayRepoURL	The URL to use when opening a connection to the database. This is necessary only when using an Oracle database as the BSE repository. See "Configuring BSE System Settings" on page 2-3 for more information.
IWayRepoUser	User name to use when connecting to the database. This is necessary only when using an Oracle database as the BSE repository. See "Configuring BSE System Settings" on page 2-3 for more information.
IWayRepoPassword	Password. If provided, it overwrites configuration. This is necessary only when using an Oracle database as the BSE repository. See "Configuring BSE System Settings" on page 2-3 for more information.
loglevel	It overwrites the level set by the <code>ManagedConnectionFactory</code> property.

Creating Multiple Managed Connector Factory Objects

To establish multiple managed connector factory objects, you must edit the `oc4j-ra.xml` file and add more `<connector-factory>` nodes. For example, the default `jca_sample` configuration in Application Explorer is represented in the `oc4j-ra.xml` file as follows:

```

<?xml version="1.0"?>
<!DOCTYPE oc4j-connector-factories PUBLIC "-//Oracle//DTD Oracle Connector
9.04//EN"
"http://xmlns.oracle.com/ias/dtds/oc4j-connector-factories-9_04.dtd">
<oc4j-connector-factories>
  <connector-factory location="eis/OracleJCAAdapter/DefaultConnection"
connector-name="IWAFJCA10">
    <config-property name="IWayHome" value="../../adapters/application"/>
    <config-property name="IWayConfig" value="jca_sample"/>
    <config-property name="IWayRepoURL" value="" />
    <config-property name="IWayRepoUser" value="" />
    <config-property name="IWayRepoPassword" value="" />
    <config-property name="logLevel" value="debug" />
  </connector-factory>
</oc4j-connector-factories>

```

To create multiple managed connector factory objects, you must add new <connector-factory> nodes in the file. For example:

```
<?xml version="1.0"?>
<!DOCTYPE oc4j-connector-factories PUBLIC "-//Oracle//DTD Oracle Connector
9.04//EN"
"http://xmlns.oracle.com/ias/dtds/oc4j-connector-factories-9_04.dtd">
<oc4j-connector-factories>
  <connector-factory location="eis/OracleJCAAdapter/DefaultConnection1"
connector-name="IWAFJCA10">
    <config-property name="IWayHome" value="../../adapters/application"/>
    <config-property name="IWayConfig" value="jca_sample"/>
    <config-property name="IWayRepoURL" value=""/>
    <config-property name="IWayRepoUser" value=""/>
    <config-property name="IWayRepoPassword" value=""/>
    <config-property name="logLevel" value="debug"/>
  </connector-factory>
<connector-factory location="eis/OracleJCAAdapter/DefaultConnection2"
connector-name="IWAFJCA10">
  <config-property name="IWayHome" value="../../adapters/application"/>
  <config-property name="IWayConfig" value="jca_sample2"/>
  <config-property name="IWayRepoURL" value=""/>
  <config-property name="IWayRepoUser" value=""/>
  <config-property name="IWayRepoPassword" value=""/>
  <config-property name="logLevel" value="debug"/>
</connector-factory>
</oc4j-connector-factories>
```

How to Write a Java Application Client Using the CCI API

The following example shows the code structure for using CCI with packaged application adapters. The code sample is shown in four steps.

Step 1. Obtain the Connection Factory

The connection factory is obtained by JNDI lookup.

```
InitialContext context = new InitialContext();
ConnectionFactory cf = (ConnectionFactory) context.lookup(iwayJndi)
```

Step 2. Obtaining a Connection for the Adapter

IWAFConnectionSpec is an implementation of ConnectionSpec used for creating a design time or runtime service adapter connection. The ConnectionSpec has seven parameters. Connection Pooling is fully supported and established based on these parameters, except log level.

Parameter Name	Description
adapterName	Name of the packaged application adapter.
config -	Adapter configuration name. NOT REQUIRED FOR IWAEAdapter.
language	Default is en.
country	Default is us.
userName	User name. If provided, it overwrites configuration.
password	Password. If provided, it overwrites configuration.

Parameter Name	Description
logLevel	It overwrites the level set by the ManagedConnectionFactory property.

Note: Currently the OracleAS Adapter J2CA supports only basic security mapping. The DEBUG log level provides detailed information on the mapping behavior. It functions as follows:

- If the user name and password are not set, and no security is provided by the application server, the OracleAS Adapter J2CA will still let it pass and rely on the adapter configuration security information.
- If the user name and password are set, these values will overwrite the adapter configuration. The OracleAS Adapter J2CA compares this information with the security information provided by the application server and log in case the values do not match. However, it still allows the information through.

The `iWAFConnectionSpec` can initiate an interaction with J.D. Edwards OneWorld if the adapter name and configuration parameters are specified in the `ConnectionSpec`. For example,

```
iWAFConnectionSpec cs = new IWAFConnectionSpec();
cs.setAdapterName(ADAPTER);
cs.setConfig(TARGET);
cs.setLogLevel(LOG_LEVEL); // Adapter layer log level
Connection c = cf.getConnection(cs); // where cf is the connection factory
```

In this snippet, `ADAPTER` and `TARGET` refer to the adapter being deployed, in this case J.D. Edwards OneWorld, and the name of a target defined in Application Explorer. See ["Complete Code Sample"](#) on page 3-7 for more information.

Step 3. Create interaction with `interactionSpec` for runtime

```
Interaction i = c.createInteraction();
IWAFInteractionSpec is = new IWAFInteractionSpec();
is.setFunctionName(IWAFInteractionSpec.PROCESS);
```

Two functions can be set: `PROCESS` and `IWAE`. `PROCESS` is used at runtime. `IWAE` is used when you are using the `IAEAdapter` at design time.

Step 4. Create Input Record and Execute Interaction

In this case, to complete the EIS invocation, a schema is provided by Application Explorer.

A standard J2CA Indexed Record is used in this example:

```
// Use JCA IndexRecord, named "input" for runtime processing.
IndexedRecord rIn = cf.getRecordFactory().createIndexedRecord("input");
rIn.add(msg_run);
IndexedRecord rOut = (IndexedRecord)i.execute(is, rIn);
System.out.println((String)rOut.get(0));
```

A special record is supported in this example:

```
//IWAFRecord rIn = new IWAFRecord("input");
```

```
//rIn.setRootXML(msg_run);
//IWAFFRecord response = executeRunInteraction(c, rIn);
//IWAFFRecord rOut = (IWAFFRecord)i.execute(is, rIn);
//System.out.println(rOut.getRootXML());
```

Where *msg_run* is an instance XML document generated from the schema created by Application Explorer. For example, the following is a sample J.D. Edwards OneWorld request XML document.

```
<?xml version="1.0" encoding="UTF-8"?>
<?xml version="1.0" encoding="UTF-8"?>
<jdeRequest type="callmethod" user="JDE" pwd="JDE" environment="DV7333" session=""
sessionidle="">
<callMethod name="AddressBookMasterMBF" app="" runOnError="" trans="">
<params>
  <param name="cActionCode">A</param>
  <param name="cUpdateMasterFile">1</param>
  <param name="cProcessEdits">1</param>
  <param name="cSuppressErrorMessages" />
  <param name="szErrorMessageID" />
  <param name="szVersion">ZJDE0001</param>
  <param name="mnSameAsExcept" />
  <param name="mnAddressBookNumber" id="1" />
  <param name="szLongAddressNumber" />
  <param name="szTaxId" />
  <param name="szSearchType">C</param>
  <param name="szAlphaName">John J. Smith</param>
  <param name="szSecondaryAlphaName">John J. Smith</param>
  <param name="szMailingName">John J. Smith</param>
  <param name="szSecondaryMailingName">John J. Smith</param>
  <param name="szDescriptionCompressed" />
  <param name="szBusinessUnit" />
  <param name="szAddressLine1">1 Main St.</param>
  <param name="szAddressLine2">Apt 101</param>
  <param name="szAddressLine3" />
  <param name="szAddressLine4" />
  <param name="szPostalCode">75000</param>
  <param name="szCity">AnyTown</param>
  <param name="szCounty" />
  <param name="szState">TX</param>
  <param name="szCountry">US</param>
  <param name="szCarrierRoute" />
  <param name="szBulkMailingCenter" />
  <param name="szPrefix1" />
  <param name="szPhoneNumber1">917-123-4567</param>
  <param name="szPhoneNumberType1" />
  <param name="szPhoneAreaCode2" />
  <param name="szPhoneNumber2" />
  <param name="szPhoneNumberType2" />
  <param name="cPayablesYNM">Y</param>
  <param name="cReceivablesYN">N</param>
  <param name="cEmployeeYN">N</param>
  <param name="cUserCode" />
  <param name="cARAPNettingY">N</param>
  <param name="cPersonCorporationCode" />
  <param name="szCertificate" />
  <param name="szAddlIndTaxID" />
  <param name="szCreditMessage" />
  <param name="szLanguage" />
  <param name="szIndustryClassification" />
```

```

<param name="cEMail" />
<param name="szCategoryCode01" />
<param name="szRemark"/>
<param name="szUserReservedCode"/>
<param name="jdUserReservedDate"/>
<param name="mnUserReservedAmount"/>
<param name="mnUserReservedNumber"/>
<param name="szUserReservedReference"/>
<param name="jdDateEffective" />
<param name="szRemark1" /> </params>
<onError abort="" />
</callMethod>
</jdeRequest>

```

Complete Code Sample

The following is a sample of the complete code:

```

import javax.resource.cci.*;
import com.ibi.afjca.cci.*;
import com.ibi.afjca.spi.*;

/**
 * The purpose of this sample is to illustrate how to use the IWAF Universal
 * JCA connector.
 */
public class IWAFJCA Simple {

    private static String HOME      = "c:/iway/xfoc/components/iwafcont/dist";
    private static String CONFIG    = "base";
    private static String LOG_LEVEL = "FATAL";

    private static String ADAPTER = "JDE";
    private static String TARGET  = "JDE_connection";

    // Input Message
    private static String msg_run = "<JDE/>";

    public static void main(String[] args) throws Exception {

        // 1. Getting the Connection factory through JNDI lookup
        // -----
        InitialContext context = new InitialContext();
        ConnectionFactory cf = (ConnectionFactory)context.lookup(iwayJndi)
        // 2. Getting a connection for a particular adapter target, in this case JDE
        // -----
        IWAFConnectionSpec cs = new IWAFConnectionSpec();
        cs.setAdapterName(ADAPTER);
        cs.setConfig(TARGET);
        cs.setLogLevel(LOG_LEVEL); // Adapter layer log level
        Connection c = cf.getConnection(cs); // where cf is the connection factory

        // 3. Create interaction with interactionSpec for RUNTIME
        // -----
        Interaction i = c.createInteraction();
        IWAFInteractionSpec is = new IWAFInteractionSpec();
        is.setFunctionName("PROCESS");

        // 4. Create input Record and execute interaction
        // -----

```

```
    // 4.1 Using JCA standard Indexed Record
    // Use JCA IndexRecord, named "input" for runtime processing.
    IndexedRecord rIn = cf.getRecordFactory().createIndexedRecord("input");
    rIn.add(msg_run);
    IndexedRecord rOut = (IndexedRecord)i.execute(is, rIn);
    System.out.println((String)rOut.get(0));

    // 4.2 Our own Record is supported here
    //IWAFFRecord rIn = new IWAFFRecord("input");
    //rIn.setRootXML(msg_run);
    //IWAFFRecord response = executeRunInteraction(c, rIn);
    //IWAFFRecord rOut = (IWAFFRecord)i.execute(is, rIn);
    //System.out.println(rOut.getRootXML());

    } // main()
}
```

Integration with BPEL Process Manager

OracleAS Adapter for J.D. Edwards OneWorld integrates seamlessly with Business Process Execution Language (BPEL) Process Manager to facilitate Web service integration. BPEL Process Manager is based on the Service-Oriented Architecture (SOA). It consumes adapter services exposed as Web Service Definition Language (WSDL) documents.

This chapter includes the following topics:

- [Overview of Adapter Integration with BPEL Process Manager](#)
- [Deployment of Adapter](#)
- [Design Time](#)
- [Invoking Adapter Request-Response Service from BPEL Process Manager](#)
- [Listening to Adapter Events Inside BPEL Process Manager](#)

Overview of Adapter Integration with BPEL Process Manager

To integrate with BPEL Process Manager, OracleAS Adapter for J.D. Edwards OneWorld must be deployed in the same OC4J container as BPEL Process Manager. The underlying adapter services must be exposed as WSDL files, which are generated during design time in Oracle Application Server Adapter Application Explorer (Application Explorer) for both request-response (outbound) and event notification (inbound) services of the adapter. See "[Generating WSDL \(J2CA Configurations Only\)](#)" on page 2-14 for more information.

The generated WSDL files are used to design the appropriate BPEL processes for inbound or outbound adapter services. A completed BPEL process must be successfully compiled in a BPEL designer and deployed to a BPEL server. Upon deployment to the BPEL server, every newly built process is automatically deployed to the Oracle BPEL Console, where you run, monitor, and administer BPEL processes, as well as listen to adapter events.

When using the adapter with BPEL Process Manager installed on OracleAS Middle Tier, your middle-tier BPEL PM home directory is OC4J_BPEL, located as follows:

```
OracleAS_home\j2ee\OC4J_BPEL
```

See Also:

- *Oracle Application Server Adapter Concepts*
- *Oracle BPEL Process Manager Developer's Guide*

Deployment of Adapter

During installation, OracleAS Adapter for J.D. Edwards OneWorld is deployed as a J2CA 1.0 resource adapter within the OC4J J2CA container. The adapter must be deployed in the same OC4J container as BPEL Process Manager.

See Also: *Oracle Application Server Adapter Concepts*

Design Time

The following tools are required to complete your adapter design-time configuration:

- OracleAS Adapter Application Explorer (Application Explorer)
- Oracle JDeveloper BPEL Designer (JDeveloper) or Eclipse

Note: The examples in this chapter demonstrate the use of JDeveloper.

Before you design a BPEL process, you must generate WSDL using Application Explorer. See "[Generating WSDL \(J2CA Configurations Only\)](#)" on page 2-14 for more information. The WSDL generated in Application Explorer is used in the BPEL process as Partner Links.


Design a BPEL Process for Request-Response Service (Outbound)

An outbound BPEL process consists of PartnerLink, Invoke, and Assign process activities. You must first create a new BPEL Process Manager connection and a synchronous BPEL process template.

Create a New Connection to BPEL PM Server

To create a new BPEL Process Manager connection:

1. Display the connections by clicking the **Connections** tab at the bottom of the upper left pane in JDeveloper.

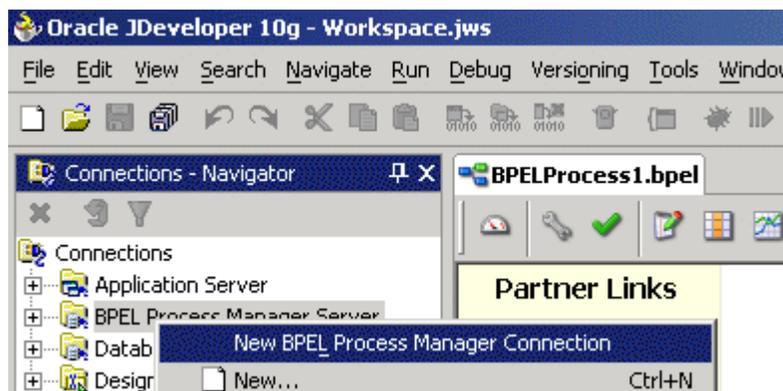


2. Right-click **BPEL Process Manager Server** and select **New BPEL Process Manager Connection**.


The Create BPEL Process Manager Connection - Welcome dialog box is displayed.

3. Click **Next**.


The Create BPEL Process Manager Connection dialog box is displayed.

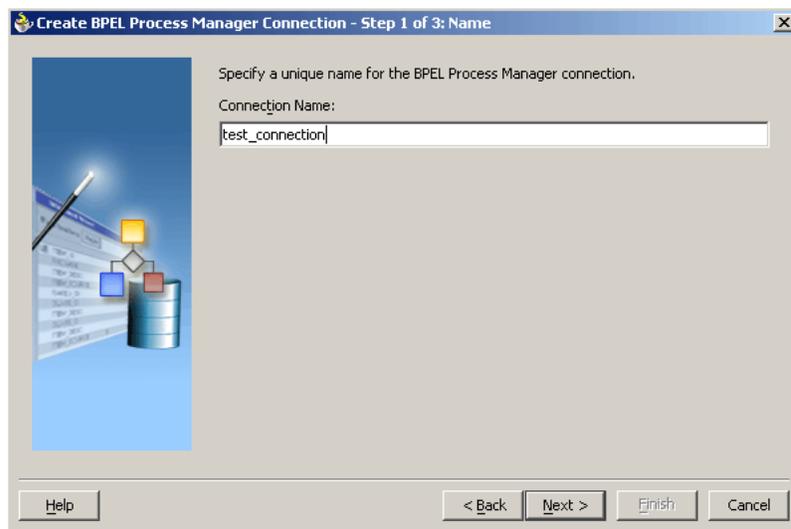

4. Specify a unique name for your BPEL Server connection and click **Next**.
The Create BPEL Process Manager Connection dialog box is displayed.

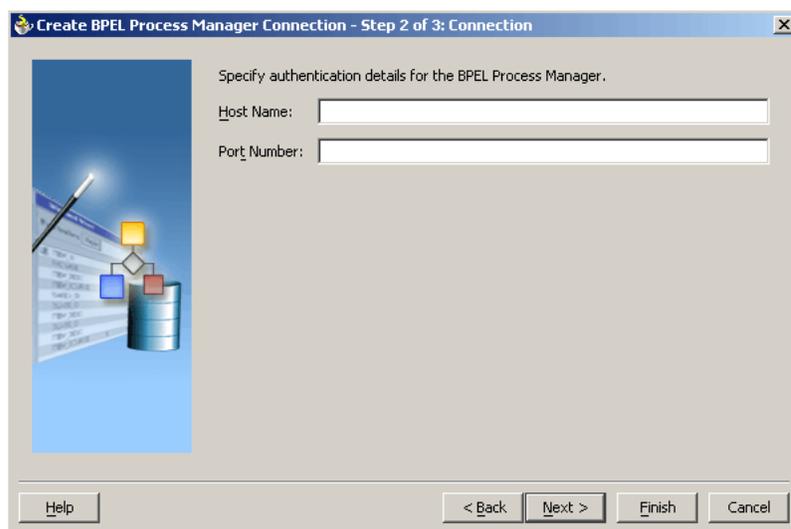


5. Specify a valid host name and port number for the BPEL PM Server you wish to connect to.
6. Click **Finish**.
Your newly created server connection is displayed in the Connections tab under the BPEL Process Manager Server node.

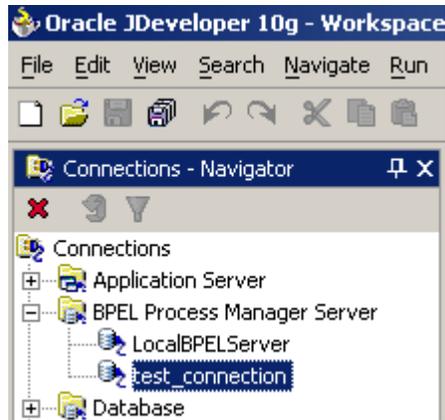

Create a New BPEL Project for Outbound Interaction (Synchronous Process)


To create a new BPEL project for a synchronous process:

1. At the bottom of the upper left pane, click the **Applications** tab and select a workspace for your project.

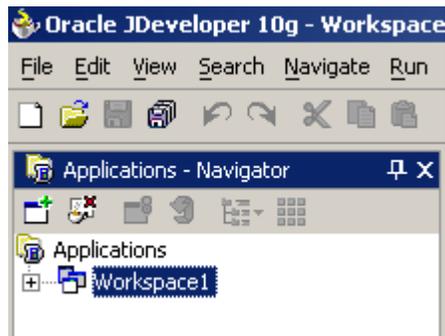


2. Right-click the workspace and select **New Project**.

The New Gallery window is displayed.

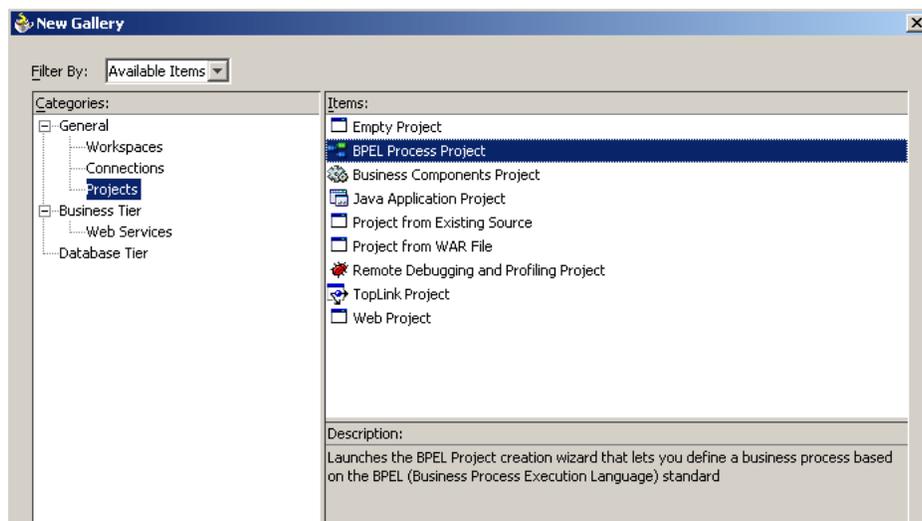

3. From the Items list, select **BPEL Process Project** and click **OK**.

The BPEL Process Project dialog box is displayed.

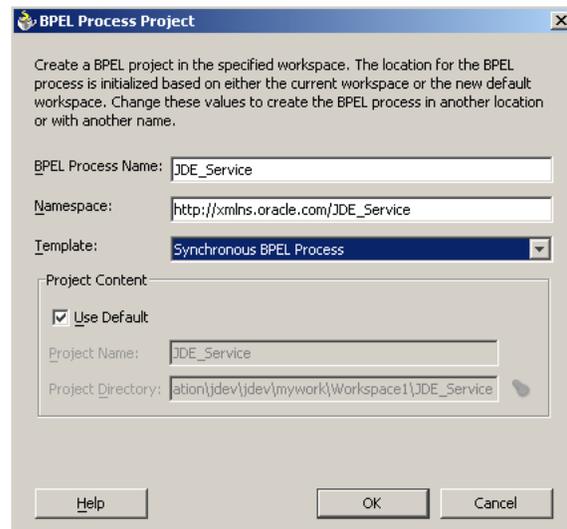

4. Perform the following steps:
 - a. Specify a name for the BPEL process.
The Namespace field is updated automatically.
 - b. From the Template list, select **Synchronous BPEL Process**.
5. Click **OK**.


Create an Outbound PartnerLink Activity

When designing a BPEL process, a PartnerLink activity must be created to invoke the J.D. Edwards service. A PartnerLink describes a set of operations within a Web service. The WSDL document is the external contract to which the Web service conforms. Given a WSDL, any BPEL process can initiate a Web service through a PartnerLink.

To create an outbound PartnerLink using the WSDL file you generated in Application Explorer:

1. From the Process Activities pane on the right, drag and drop a PartnerLink to the visual editor.

The Create Partner Link dialog box is displayed.

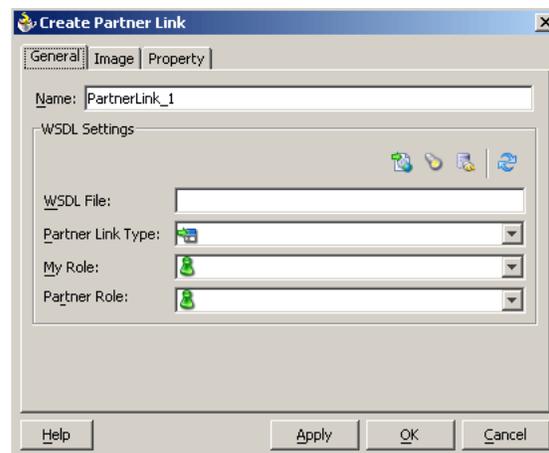

- Click the **WSIL browser** icon (second icon from the left preceding the **WSDL File** field).

The WSDL Chooser dialog box is displayed.



- Expand your new connection, then expand **adapters**, and then **applications**.


The WSDL tree displayed in the WSDL Chooser dialog box lists any WSDL files you have created using Application Explorer. The WSDL tree is generated by a WSDL servlet, which is automatically deployed as part of the BPEL Server installation.



Note: If you have organized your WSDL files in subfolders, the WSIL browser will display the full tree structure of your WSDL hierarchy. By default, the names of all WSDL files generated for outbound adapter services end with `_invoke`.

- Select **GetEffectiveAddress_invoke.wSDL** and click **OK**.


The **WSDL File** field in the Create Partner Link dialog box displays the name and location of the selected WSDL file. The **Partner Link Type** field specifies the PartnerLink defined in the WSDL file.

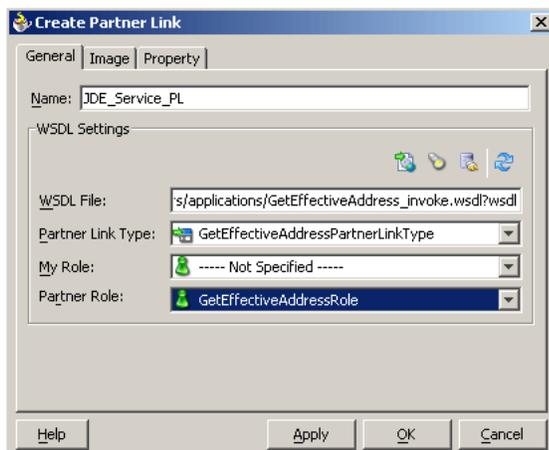

Perform the following steps:

- a. Leave the **My Role** field unspecified. The role of the PartnerLink is null, as it will be synchronously invoked from the BPEL process.
 - b. From the **Partner Role** list, select the default value **GetEffectiveAddressRole**. This is the role of the BPEL process.
5. Click **OK**.

The new PartnerLink appears in the visual editor.

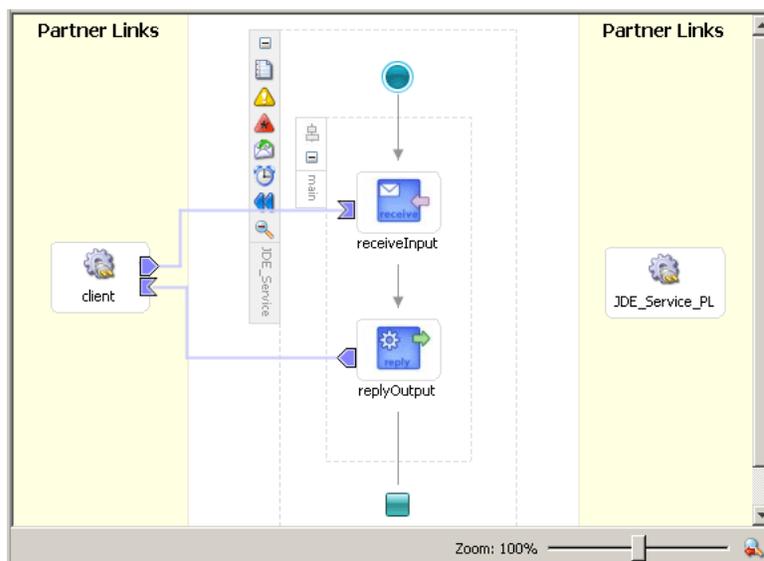

6. Select **Save** from the **File** menu.


Create an Outbound Invoke Activity

This activity enables you to specify an operation you want to invoke for the service identified by its PartnerLink. The Invoke activity opens a port in the process that is used to send and receive data. It uses this port to submit required data and receive a response. For synchronous callbacks, only one port is needed for both the send and the receive functions.

To create an outbound Invoke activity:

1. From the **Process Activities** pane on the right, drag an **Invoke** activity to the visual editor and place it between the Receive activity (`receiveInput`) and the Reply activity (`replyOutput`).
2. Extend a connection between the Invoke activity and your newly-created PartnerLink.

The Edit Invoke dialog box is displayed. Note that the Partner Link and Operation fields are automatically populated.

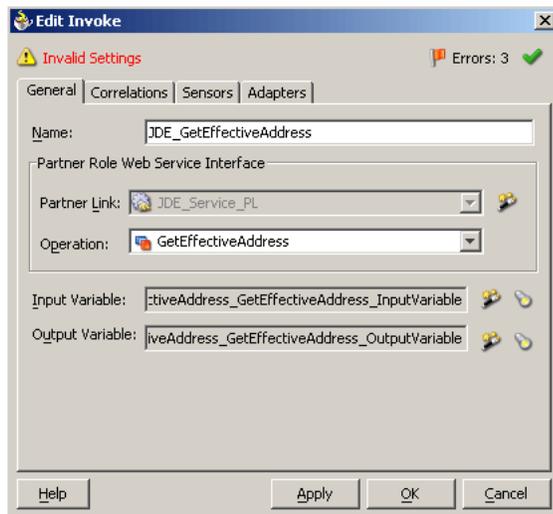

Note: Ignore any invalid settings and error warnings.

Perform the following steps:

- a. In the **Name** field, provide a meaningful name for the Invoke activity.
- b. Click the first icon to the right of the **Input Variable** field, then click **OK** in the Create Variable window that is displayed.

A global variable is automatically created in the Input Variable field.

- c. Click the first icon to the right of the **Output Variable** field, then click **OK** in the Create Variable window that is displayed.

A global variable is automatically created in the Output Variable field.

- d. Click **Apply**.

The Edit Invoke window should no longer display any warnings or errors.

3. Click **OK**.
4. Select **Save** from the **File** menu.


Create an Assign Activity

An Assign activity provides a method for simple data manipulation, such as copying the contents of one variable to another. This Assign activity maps the input variable of the J.D. Edwards process to the J.D. Edwards PartnerLink input.

To create an Assign activity:

1. From the **Process Activities** pane on the right, drag an **Assign** activity to the visual editor and place it between `receiveInput` and `JDE_GetEffectiveAddress`.
2. Double-click the **Assign** activity icon.

The Assign dialog box is displayed.

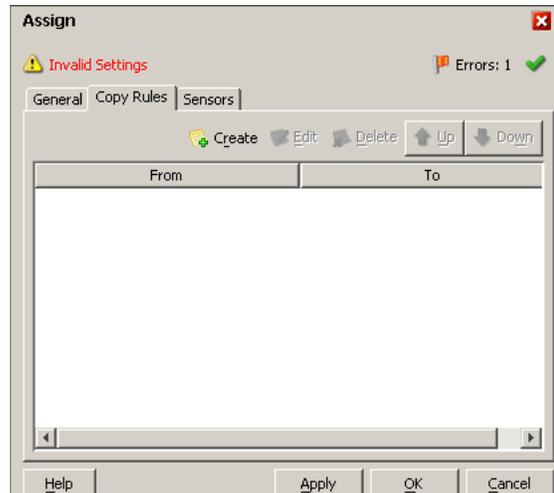


Note: Ignore any invalid settings and error warnings.

3. In the Copy Rules tab, click **Create**.

The Create Copy Rule dialog box is displayed.

- a. In the **From** pane, expand **Variables**, then **inputVariable**, and then highlight **payload**.
- b. In the **To** pane, expand **Variables**, then **JDE_GetEffectiveAddress_GetEffectiveAddress_InputVariable**, and then highlight **input_GetEffectiveAddress**.

Your Create Copy Rule dialog box should look as follows:

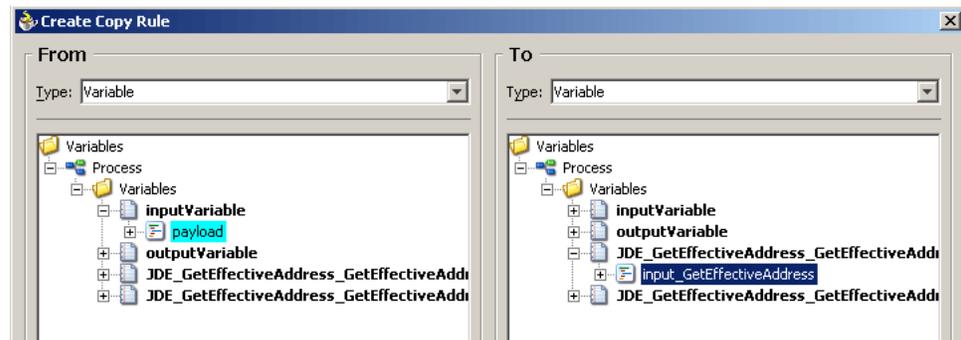

4. To close the Create Copy Rule dialog box and the Assign dialog box, click **OK**.


Create a Second Assign Activity

This Assign activity maps the output variable of the J.D. Edwards process to the J.D. Edwards PartnerLink output.

To create a second Assign activity:

1. From the **Process Activities** pane on the right, drag another **Assign** activity to the visual editor and place it between the Invoke activity (JDE_GetEffectiveAddress) and the Reply activity (replyOutput).
2. Double-click the **Assign** activity icon.

The Assign settings dialog box is displayed.

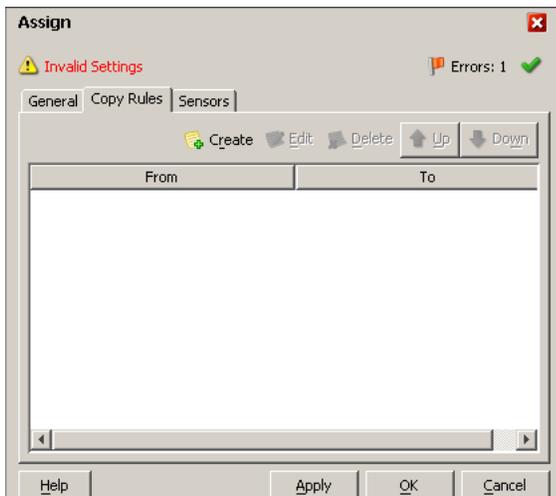


Note: Ignore any invalid settings and error warnings.

3. In the Copy Rules tab, click **Create**.

The Create Copy Rule dialog box is displayed. Perform the following steps:


- a. In the **From** pane, expand **Variables**, then **JDE_GetEffectiveAddress_GetEffectiveAddress_OutputVariable**, and then highlight **output_GetEffectiveAddress**.
- b. In the **To** pane, expand **Variables**, then **outputVariable**, and then highlight **payload**.

Your Create Copy Rule dialog box should look as follows:

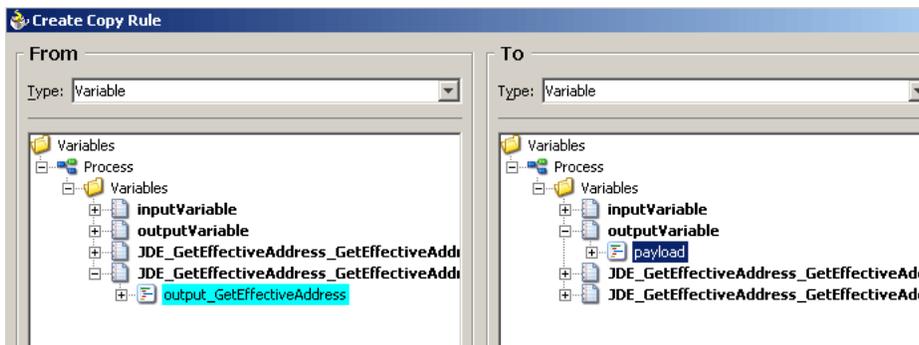

4. To close the Create Copy Rule dialog box and the Assign dialog box, click **OK**.
5. Select **Save** from the **File** menu.

The following image shows the diagram view of your completed BPEL process.

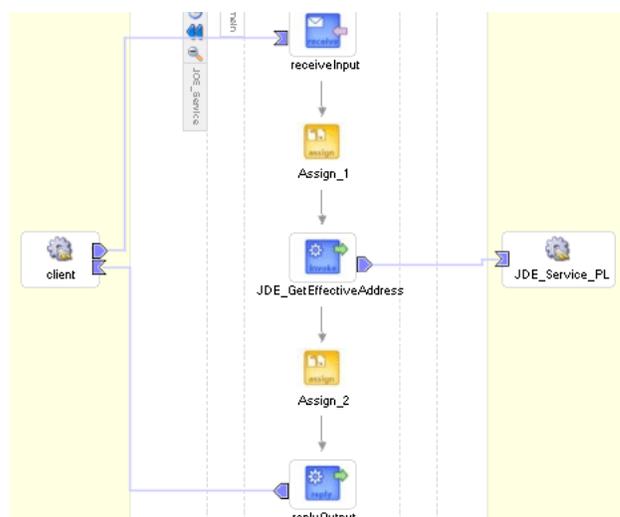

See ["Invoking Adapter Request-Response Service from BPEL Process Manager"](#) on page 4-15 for information on how to deploy and manage your outbound process.

See Also:

- *Oracle BPEL Process Manager Developer's Guide*
- *Oracle Application Server Adapter Concepts*

Design a BPEL Process for Event Handling (Inbound)

An inbound BPEL process consists of a PartnerLink and a Receive process activity. You must first create a channel and a new BPEL Process Manager Server connection. See [Chapter 5, "BPEL Process Manager Integration Examples"](#) for instructions on how to perform these procedures.


Note: You must create a separate channel for every event and select that channel when you generate WSDL for inbound interaction using Application Explorer. Do not start the channel in Application Explorer, as BPEL Process Manager manages endpoint activation independently. See ["J.D. Edwards OneWorld Service Integration"](#) on page 5-2 for more information.

Create a New BPEL Project for Inbound Interaction (Empty Process)

Before you create a BPEL project, verify that your BPEL Server is running. After you have created a new server connection, you are ready to design an empty process template for your BPEL project.


To create a new BPEL project for inbound interaction:

1. Click the **Applications** tab and select a workspace for your project.




2. Right-click the workspace and select **New Project**.

The New Gallery window is displayed.

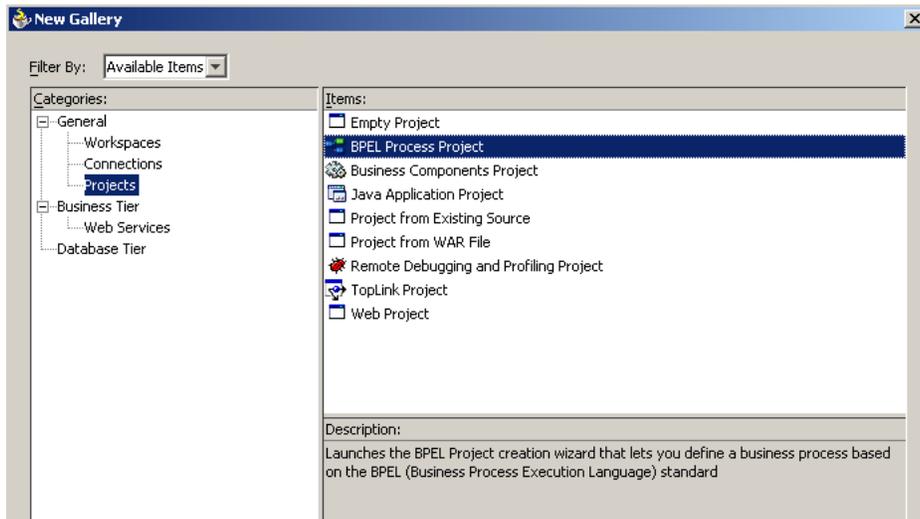

3. From the Items list, select **BPEL Process Project** and click **OK**.

The BPEL Process Project dialog box is displayed.

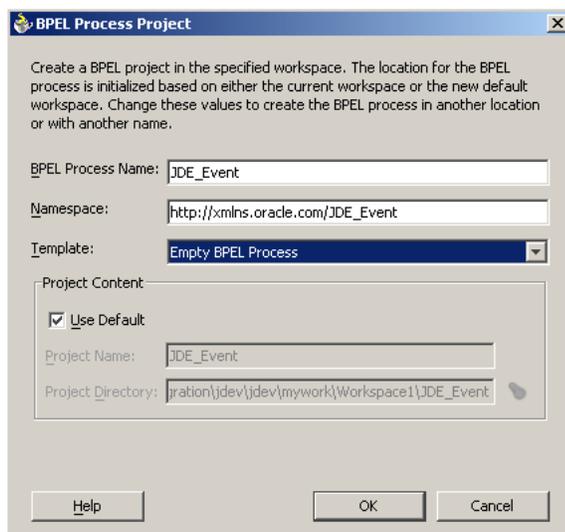

4. Perform the following steps:
 - a. Specify a name for the process.
The Namespace field is updated automatically.
 - b. From the Template list, select **Empty BPEL Process**.
 - c. Click **OK**.


Create an Inbound PartnerLink Activity

When designing a BPEL process, a PartnerLink activity must be created to invoke the J.D. Edwards service. A PartnerLink describes a set of operations within a Web service. The WSDL document is the external contract to which the Web service conforms. Given a WSDL, any BPEL process can initiate a Web service through a PartnerLink.

To create an inbound PartnerLink using the WSDL file you generated in Application Explorer:


1. From the Process Activities pane on the right, drag and drop a PartnerLink to the visual editor.

The Create Partner Link dialog box is displayed.

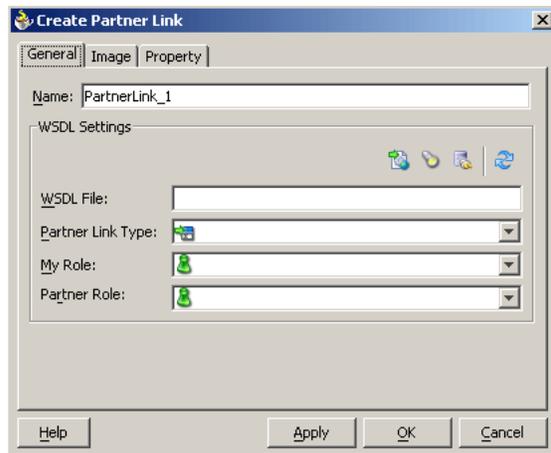


2. Click the **WSIL browser** icon (second icon from the left preceding the **WSDL File** field).

The WSDL Chooser dialog box is displayed.

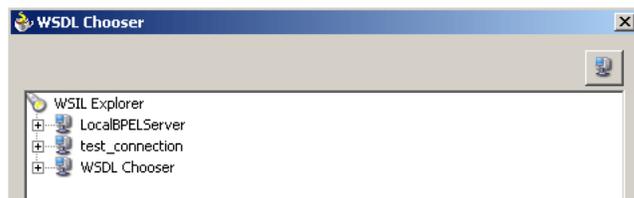

3. Expand your new connection, then expand **adapters**, and then **applications**.


The WSDL tree displays the WSDL files you created using Application Explorer. The WSDL tree is generated by a WSDL servlet, which is automatically deployed as part of the BPEL Server installation.

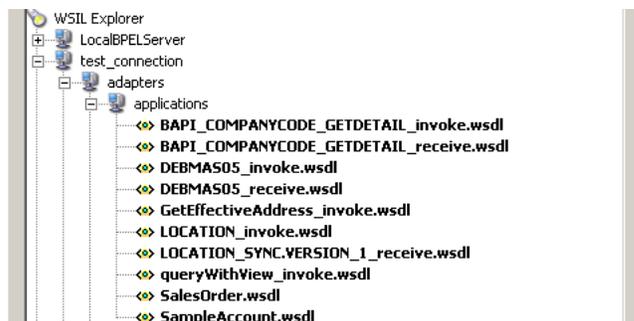

Note: If you have organized your WSDL files in subfolders, the WSIL browser will display the full tree structure of your WSDL hierarchy. The names of WSDL files generated for inbound adapter services usually end with `_receive`.

4. Select **SalesOrder.wsdl** and click **OK**.

The Create Partner Link dialog box is displayed.

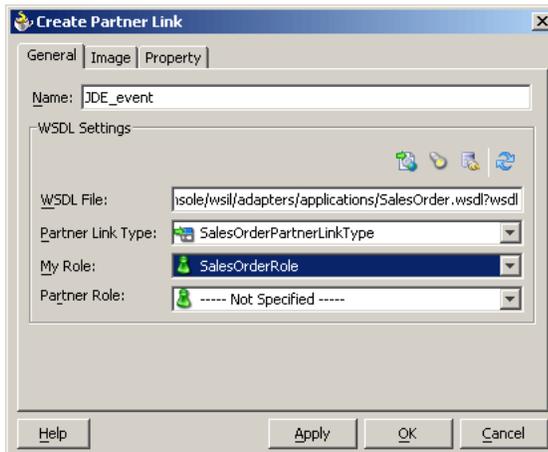


The **WSDL File** field displays the name and location of the selected WSDL file. The **Partner Link Type** field specifies the PartnerLink defined in the WSDL file.

Perform the following steps:

- a. From the **My Role** list, select the default value **SalesOrderRole**.
 - b. Leave the **Partner Role** field unspecified.
5. Click **Apply**, and then **OK**.

The new JDE PartnerLink appears in the visual editor.

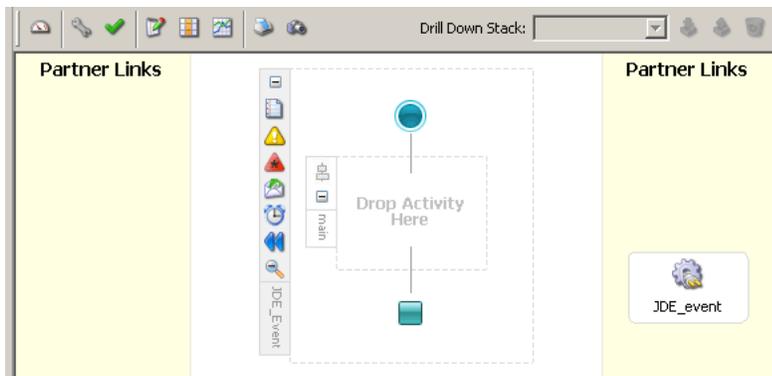


6. Select **Save** from the **File** menu.

Create an Inbound Receive Activity

To create an inbound Receive Activity:

1. From the **Process Activities** pane on the right, drag a **Receive** activity to the visual editor and place it in the designated placeholder labeled **Drop Activity Here**.
2. Connect the Receive activity to the **JDE_event** PartnerLink.

The Edit Receive dialog box is displayed.

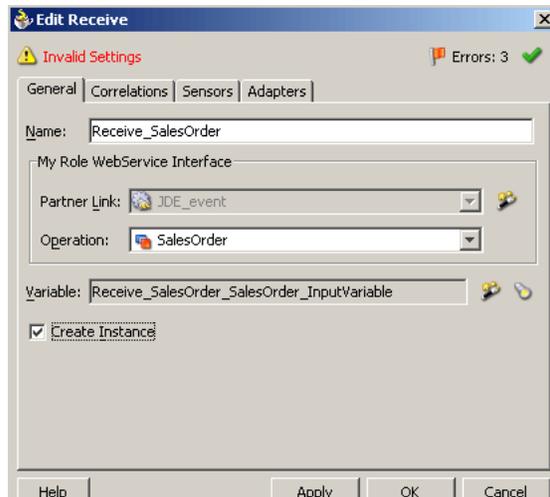

Note: Ignore any invalid settings and error warnings.

Perform the following steps:

- a. Specify a name for the Receive Activity, for example, **Receive_SalesOrder**.
 - b. Click the first icon to the right of the **Variable** field, then click **OK** in the Create Variable dialog box that is displayed.
 - c. Verify that the **Create Instance** check box is selected.
3. Click **Apply**.
 4. Click **OK**.

The Receive dialog box should no longer display any warnings or errors.

A connection is created between the PartnerLink and the Receive activity. You have completed the design of your inbound BPEL process.

See "[Listening to Adapter Events Inside BPEL Process Manager](#)" on page 4-19 for information on how to deploy and manage your inbound process.

See Also:

- *Oracle BPEL Process Manager Developer's Guide*
- *Oracle Application Server Adapter Concepts*

Invoking Adapter Request-Response Service from BPEL Process Manager

The OracleAS Adapter for J.D. Edwards OneWorld request-response service is used to create, delete, update, and query back-end data as well as to call back-end workflows and transactions. The following section describes how to invoke the adapter synchronous request-response service, also referred to as Outbound Interaction, as well as how to manage the process in Oracle BPEL Console.

Deploy the Outbound BPEL Process

The procedures for deploying an inbound and an outbound BPEL process using the JDeveloper interface are identical.

To deploy your BPEL process in JDeveloper:

1. Right-click your process flow in the Applications - Navigator pane.
2. Select **Deploy**, then *Your BPEL PM Server connection*, and then **Deploy to default domain**.

The Password Prompt dialog box is displayed.



3. In the **Domain Password** field, enter your BPEL Process Manager password.

The deployment process starts automatically after you enter the correct password.

4. Observe the **Messages** log at the bottom of the window.

The Messages log displays the deployment status. In this example, it shows a successful deployment message for the outbound process.



If deployment was not successful, click the **Compiler** tab to view all error and warning messages generated during the deployment process.

Manage the Deployed Outbound Process in Oracle BPEL Console

JDeveloper deploys the developed process directly to the Oracle BPEL Console, which enables you to run, monitor, and administer BPEL processes.

To invoke adapter request-response service:

1. Start the Oracle BPEL Console by entering the following URL in a browser:

`http://host:port/BPELConsole`

2. Select a domain and provide a valid password.

The Oracle BPEL Console main page is displayed. All deployed BPEL processes are listed in the Dashboard tab.

Deployed BPEL Processes		In-Flight BPEL Process Instances	
Name	Instance	BPEL Process	
CreditRatingService			
JDE_Event			
JDE_Service			
PSFTLOCATION_inbound			
PSFT_outbound			
SAP_GetCCDetail			
SAP_OUTBOUND			
SAP_inbound			
SAP_test			
Siebel_Account			
Siebel_Event			
TaskActionHandler			

3. Click the **BPEL Processes** tab.

This tab provides a more detailed view of each deployed process.

Deployed Processes					
	BPEL Process ↓	Lifecycle	State	Open Instances	Closed Instances
<input type="checkbox"/>	CreditRatingService (v. 1.0)	Active	On	0	0
<input type="checkbox"/>	JDE_Event (v. 1.0)	Active	On	0	0
<input type="checkbox"/>	JDE_Service (v. 1.0)	Active	On	0	0
<input type="checkbox"/>	PSFTLOCATION_inbound (v. 1.0)	Active	On	0	0
<input type="checkbox"/>	PSFT_outbound (v. 1.0)	Active	On	0	0
<input type="checkbox"/>	SAP_GetCCDetail (v. 1.0)	Active	On	0	0
<input type="checkbox"/>	SAP_OUTBOUND (v. 1.0)	Active	On	0	0
<input type="checkbox"/>	SAP_inbound (v. 1.0)	Active	On	0	0
<input type="checkbox"/>	SAP_test (v. 1.0)	Active	On	0	0
<input type="checkbox"/>	Siebel_Account (v. 1.0)	Active	On	0	0
<input type="checkbox"/>	Siebel_Event (v. 1.0)	Active	On	0	0
<input type="checkbox"/>	TaskActionHandler (v. 1.0)	Active	On	0	0
<input type="checkbox"/>	TaskManager (v. 1.0)	Active	On	0	0

4. Click the J.D. Edwards outbound process link.

The Manage window provides options for managing this BPEL process. Do not change any of the following default settings.

BPEL Process: JDE_Service Version: 1.0 Lifecycle: Active
 Statistics: [0 Open Instances](#) | [0 Closed Instances](#)

Manage [Initiate](#) [Descriptor](#) [WSDL](#) [Sensors](#) [Source](#)

Managing this BPEL Process

Process Lifecycle:
 When the process lifecycle is **active** instances may be instantiated from the process; when it is **retired**, no new instances may be instantiated but existing instances are permitted to complete normally.

Active Retired

Process State:
 The process state controls overall access to the process. When the state is **on** instances may be instantiated and access to existing instances and activities belonging to the process will be permitted.

On Off

5. Click the **Initiate** tab.

The Initiate tab enables you to test your BPEL process.

Dashboard **BPEL Processes**

BPEL Process: JDE_Service Version: 1.0 Lifecycle: Active
 Statistics: [0 Open Instances](#) | [0 Closed Instances](#)

[Manage](#) **Initiate** [Descriptor](#) [WSDL](#) [Sensors](#) [Source](#)

Testing this BPEL Process

Initiating a test instance

To create a new 'test' instance of this BPEL Process, fill the following text area with the XML representation on the 'Post XML Message' button.

```
<?xml version="1.0" encoding="UTF-8" ?>
<jdeRequest type="callmethod">
<callMethod name="GetEffectiveAddress" runOnError="no">
<params>
<param name="mnAddressNumber">99999</param>
<param name="jdDateBeginningEffective"/>
<param name="cEffectiveDateExistence10"/>
<param name="szAddressLine1"/>
<param name="szAddressLine2"/>
<param name="szAddressLine3"/>
<param name="szAddressLine4"/>
<param name="szZipCodePostal"/>
</callMethod>
</jdeRequest>
```

Perform the following steps:

- a. From the **Initiating a test instance** list, select **XML Source**.
- b. Enter the following code in the text area provided for XML input:

```
<?xml version="1.0" encoding="UTF-8"?>
<jdeRequest type="callmethod">
<callMethod name="GetEffectiveAddress" runOnError="no">
<params>
<param name="mnAddressNumber">99999</param>
<param name="jdDateBeginningEffective"/>
<param name="cEffectiveDateExistence10"/>
<param name="szAddressLine1"/>
<param name="szAddressLine2"/>
<param name="szAddressLine3"/>
<param name="szAddressLine4"/>
<param name="szZipCodePostal"/>
<param name="szCity"/>
<param name="szCountyAddress"/>
</callMethod>
</jdeRequest>
```

```

<param name="szState" />
<param name="szCountry" />
<param name="szUserid" />
<param name="szProgramid" />
<param name="jdDateupdated" />
<param name="szWorkstationid" />
<param name="mnTime1astupdated" />
<param name="szNamealpha" />
</params>
<onError abort="yes" />
</callMethod>
</jdeRequest>

```

6. Click **Post XML Message**.
7. Click the **Instances** tab, and then click the **Audit** tab to view the response received from the J.D. Edwards OneWorld system.

See Also: *Oracle Application Server Adapter Concepts*

Listening to Adapter Events Inside BPEL Process Manager

The OracleAS Adapter for J.D. Edwards OneWorld event notification service, also referred to as Inbound Interaction, is used to listen to events that occur in an EIS. The following section describes how to deploy your inbound BPEL process and listen to adapter events at runtime using Oracle BPEL Console.

Deploy the Inbound BPEL Process

The procedures for deploying an inbound and an outbound BPEL process using the JDeveloper interface are identical.

To deploy your BPEL process in JDeveloper:


1. Right-click your process flow in the Applications pane.
2. Select **Deploy**, then *Your BPEL PM Server connection*, and then **Deploy to default domain**.

The Password Prompt dialog box is displayed.



3. In the **Domain Password** field, enter your BPEL Process Manager password.
The deployment process starts automatically after you enter the correct password.
4. Observe the **Messages** log at the bottom of the window.

The Messages log displays the deployment status. In this example, it shows a successful deployment message for the process.

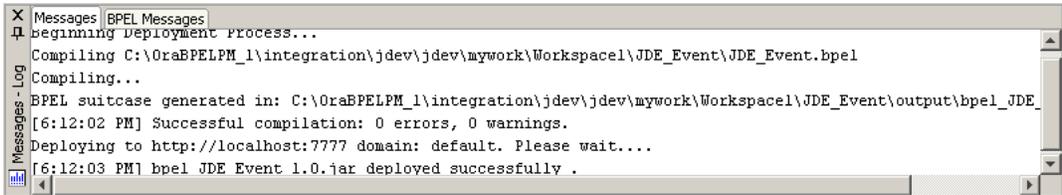

If deployment was not successful, click the **Compiler** tab to view all error and warning messages generated during the deployment process.

Listen to Adapter Events in Oracle BPEL Console

JDeveloper deploys the developed process directly to Oracle BPEL Console, which enables you to run, monitor, and administer BPEL processes, as well as to listen to adapter events at runtime using Oracle BPEL Console.

To listen to adapter events:

1. Start the Oracle BPEL Console by entering the following URL in a browser:

`http://host:port/BPELConsole`

2. Select a domain and provide a valid password.

The Oracle BPEL Console Dashboard tab is displayed.

3. Click the **Instances** tab.

Upon receiving a runtime event, an instance of the event is displayed under the Instances tab.

	Dashboard	BPEL Processes	Instances	Activities
List of BPEL Process Instances 1 - 8				
	Instance	BPEL Process	Last Modified ↑	
✓	802 : Instance #802 of JDE_Event	JDE_Event (v. 1.0)	5/20/05 12:36:12 PM	
✓	801 : Instance #801 of demo_process_inbound	demo_process_inbound (v. 1.0)	5/20/05 12:35:55 PM	
✓	601 : Instance #601 of Siebel_Event	Siebel_Event (v. 1.0)	5/18/05 2:24:15 PM	

4. To see the event message, click the instance, and then click the **Audit** tab.

The event message is displayed.

Manage Flow **Audit** Debug Interactions Sensor Values

Audit trail of this BPEL instance | [View Raw XML](#) [As...]

[2005/06/06 17:57:54] New instance of BPEL process "JDE_Service" initiated (# "1102").

```

<process>
  <sequence>
    Receive_1
      [2005/06/07 06:59:29] Received "Receive_1_SalesOrder_InputVariable" call from partner "PartnerLink_1" |
      <Receive_1_SalesOrder_InputVariable>
      <part xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" name="event_SalesOrder">
      <jdeResponse xmlns="urn:Schemas-jdedwards-com:trans.response.JDES00OUT" user="JDE" type="trans" sess
environment="DV7333">
      <transaction action="transactionInfo" type="JDES00OUT">
      <returnCode code="0">XML Request OK</returnCode>
      <key>
      <column name="EdiUserId">JDE</column>
      <column name="EdiBatchNumber">15168</column>
      <column name="EdiTransactNumber">106062</column>
      </key>
      <table type="Header" name="F4201Z1">
      <column name="EdiUserId">JDE</column>
      <column name="EdiBatchNumber">15168</column>
      <column name="EdiTransactNumber">106062</column>
      <column name="EdiLineNumber">1,000</column>
      <column name="EdiDocumentType">50</column>
      <column name="TypeTransaction">JDES00OUT</column>
      <column name="EdiTranslationFormat" />
      <column name="EdiTransmissionDate" />
      <column name="DirectionIndicator">2</column>
    
```

To view the XML source code, click **View Raw XML**. See [Chapter 5, "BPEL Process Manager Integration Examples"](#) on page 5-1 for more information.

See Also: *Oracle Application Server Adapter Concepts*

BPEL Process Manager Integration Examples

This chapter contains the following examples:

- [J.D. Edwards OneWorld Service Integration](#)
- [J.D. Edwards OneWorld Event Integration](#)

The scenarios shown in this chapter require the following prerequisites.

Prerequisites

The following are installation and configuration requirements:

- OracleAS Adapter for J.D. Edwards OneWorld must be installed on Oracle Application Server.
- Oracle BPEL PM Server must be properly configured and running.
- Oracle JDeveloper must be properly installed.

See Also: *Oracle Application Server Adapters Installation Guide*

The examples in this chapter present the configuration steps necessary for demonstrating service and event integration with J.D. Edwards OneWorld. Prior to using this material, you must be familiar with the following:

- How to create a J2CA configuration, as BPEL PM is only compatible with the J2CA Connector. See "[Creating a Configuration for J2CA](#)" on page 2-8 for more information.
- How to configure OracleAS Adapter for J.D. Edwards OneWorld for services and events using Application Explorer. See [Chapter 2, "Configuring OracleAS Adapter for J.D. Edwards One World"](#) for more information.

See Also: *Oracle BPEL Process Manager Developer's Guide*

Adapter integration with Oracle BPEL Process Manager is a two-step process:

1. **Design Time:** OracleAS Adapter for J.D. Edwards OneWorld is configured in Application Explorer for services and events, as described in [Chapter 2, "Configuring OracleAS Adapter for J.D. Edwards One World"](#). Integration logic is modeled using JDeveloper.
2. **Runtime:** After you deploy the BPEL process you designed in JDeveloper, you can test your service configuration or see newly received events in the BPEL Console.

J.D. Edwards OneWorld Service Integration

This topic illustrates J.D. Edwards service integration. The design-time and runtime procedures are described below.


Design-Time Configuration

Generating WSDL for Request/Response Service

To generate WSDL for outbound interaction:


1. Start Application Explorer and connect to a defined J.D. Edwards target.
2. Expand **Services, JDEJAVA_CFIN, B0100033**, and then select **GetEffectiveAddress**.
3. Right-click GetEffectiveAddress.

The following menu is displayed.

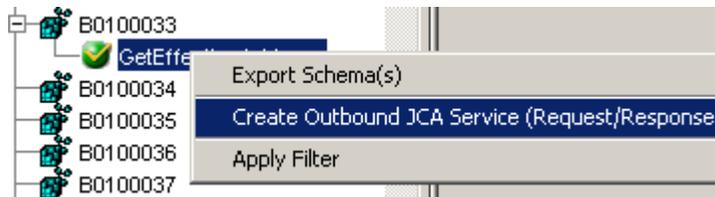

4. Select **Create Outbound JCA Service (Request/Response)**.

The Export WSDL dialog box is displayed.

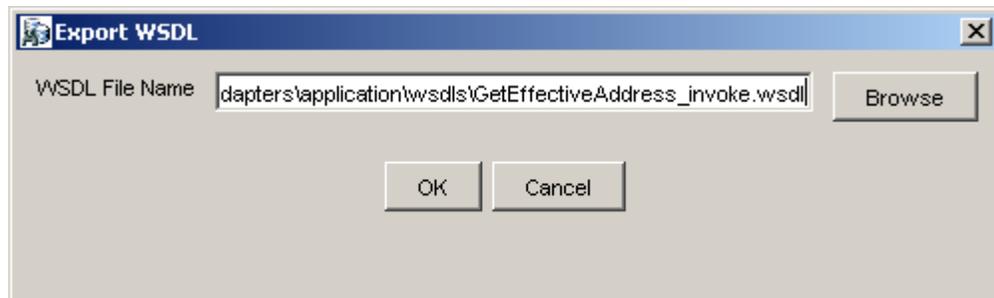


5. Accept the default name and location for the file.
The **.wsdl** file extension is added automatically.
6. Click **OK**.
The WSDL file is created.

Creating a BPEL PM Server Connection

Before you design a BPEL process, you must create a connection to your BPEL Server using JDeveloper. To create a server connection:

1. Open **JDeveloper**.
2. To display the connections, click the **Connections** tab at the bottom of the upper left pane in JDeveloper.

The following menu is displayed.

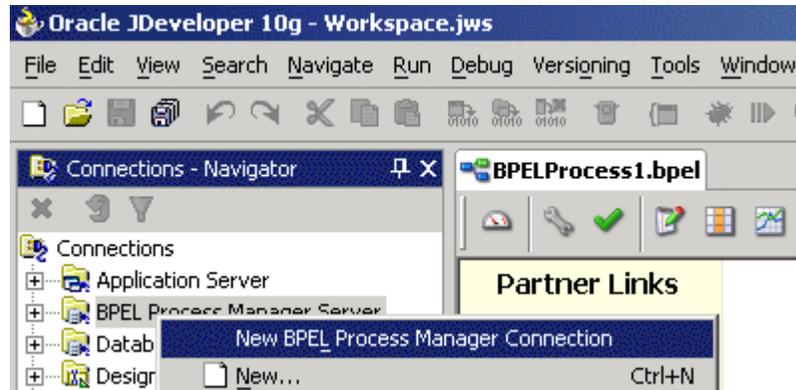


3. Right-click **BPEL Process Manager Server** and select **New BPEL Process Manager Connection**.

The Create BPEL Process Manager Connection - Welcome dialog box is displayed.


4. Click **Next**.

The Create BPEL Process Manager Connection dialog box is displayed.

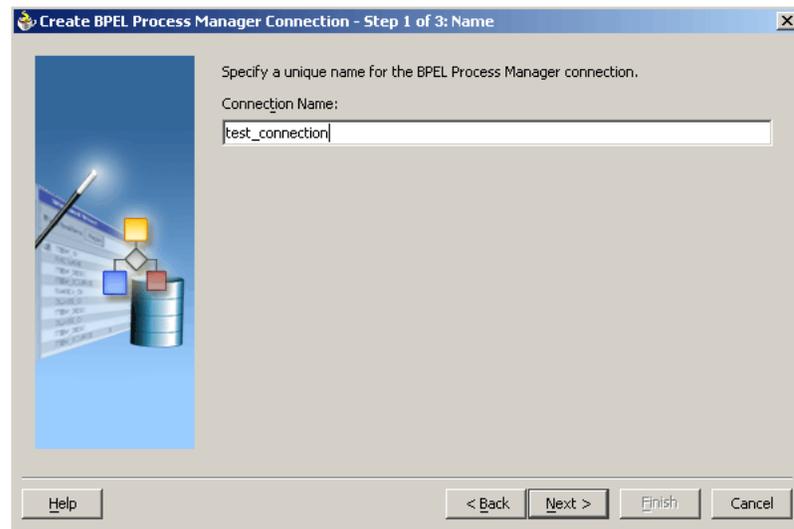


5. Specify a unique name for your BPEL Server connection and click **Next**.

The Create BPEL Process Manager Connection dialog box is displayed.

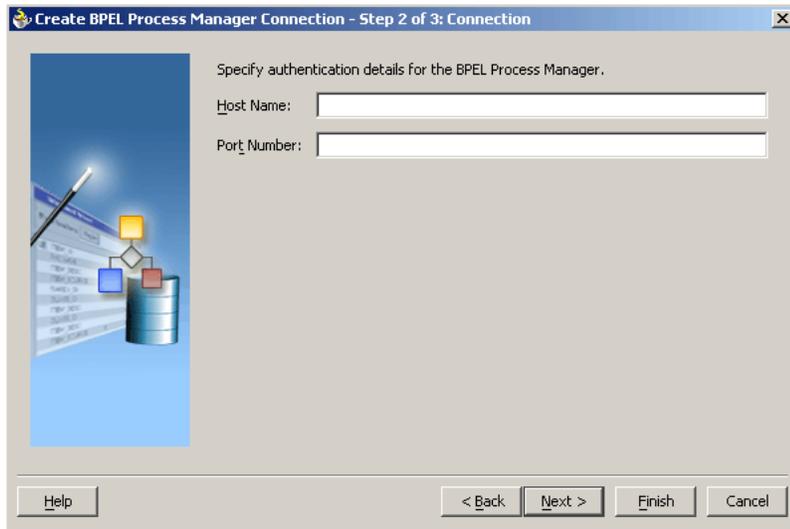

6. Specify a valid host name and port number for the BPEL PM Server you wish to connect to.
7. Click **Finish**.


Your newly created server connection is displayed in the Connections tab under the BPEL Process Manager Server node.

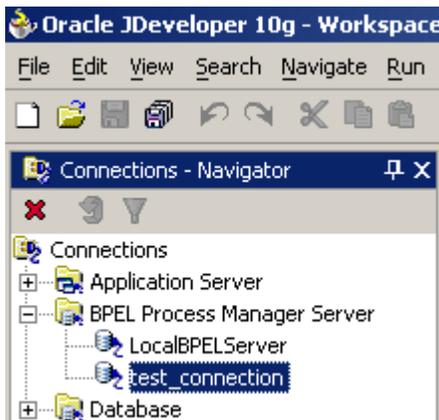

Creating a BPEL Project for a Synchronous BPEL Process


To create a BPEL Project for a synchronous BPEL process:

1. At the bottom of the upper left pane, click the **Applications** tab and select a workspace for your project.

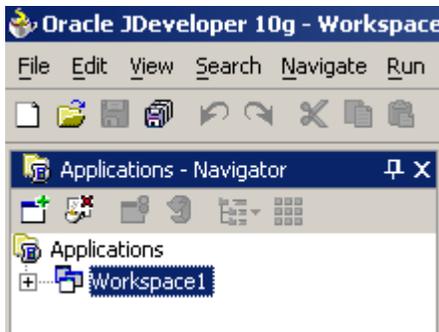


2. Right-click the workspace and select **New Project**.

The New Gallery window is displayed.

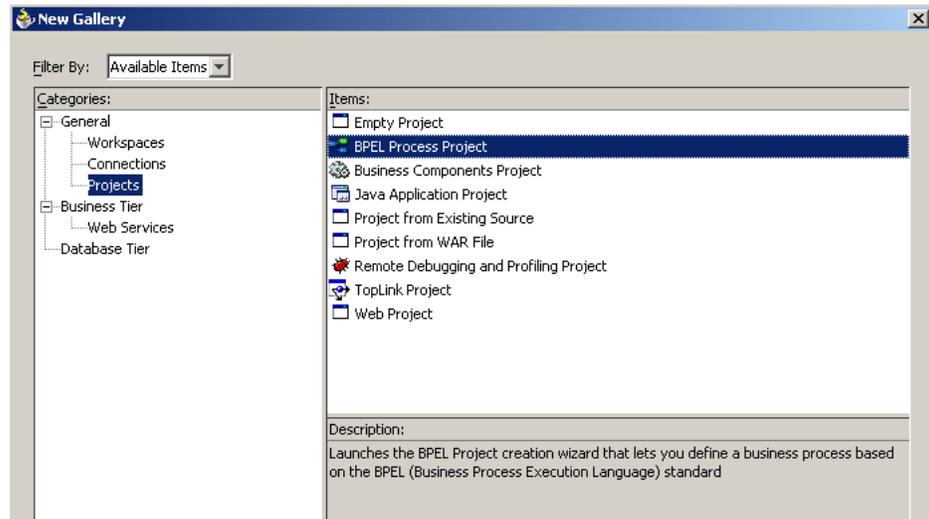

3. From the Items list, select **BPEL Process Project** and click **OK**.

The BPEL Process Project dialog box is displayed.

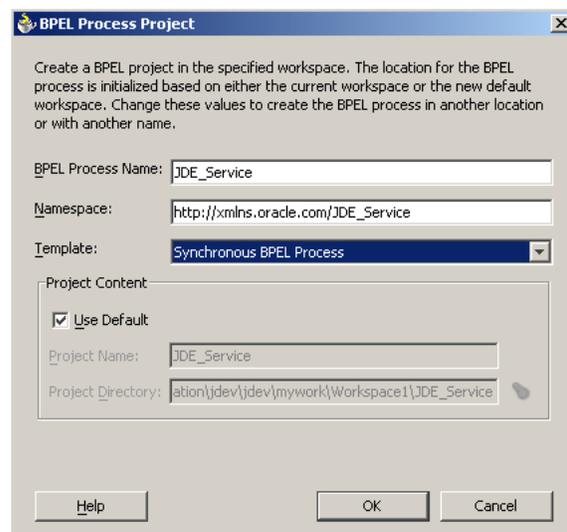


4. Perform the following steps:
 - a. Specify a name for the BPEL process, for example, **JDE_Service**.
The Namespace field is updated automatically.
 - b. From the Template list, select **Synchronous BPEL Process**.
5. Click **OK**.

Designing the BPEL Process for GetEffectiveAddress (Outbound Service)

To design the BPEL Process:


1. From the Process Activities pane on the right, drag and drop a PartnerLink to the visual editor.

The Create Partner Link dialog box is displayed.

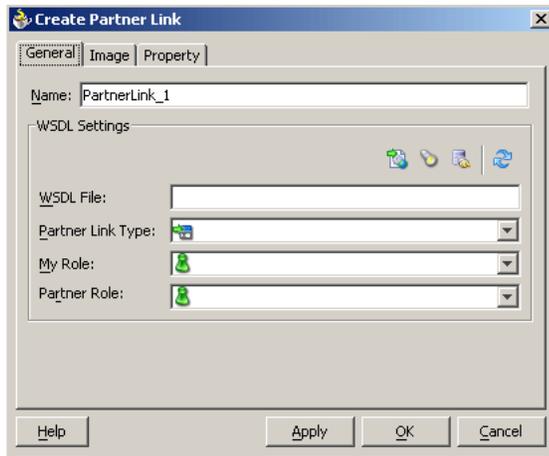


2. Click the **WSIL browser** icon (second icon from the left preceding the **WSDL File** field).

The WSDL Chooser dialog box is displayed.

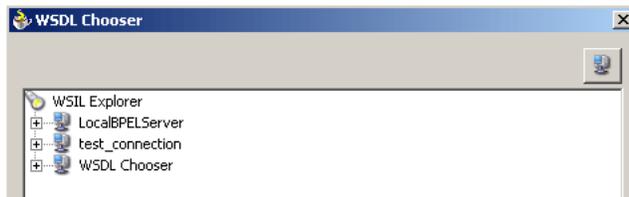


3. Expand your new server connection, then expand **adapters**, and then **applications**.

The WSDL Chooser dialog box is displayed.

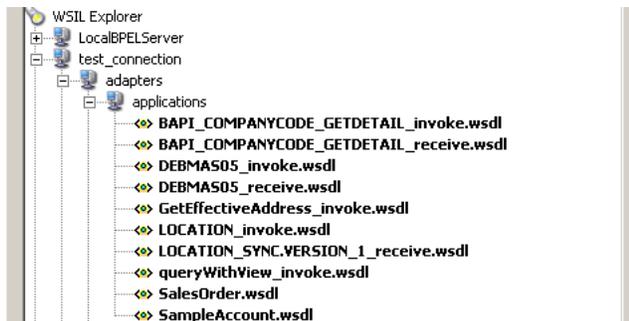

4. Select **GetEffectiveAddress_invoke.wSDL** and click **OK**.


The **WSDL File** field in the Create Partner Link dialog box displays the name and location of the selected WSDL file. The **Partner Link Type** field specifies the PartnerLink defined in the WSDL file.

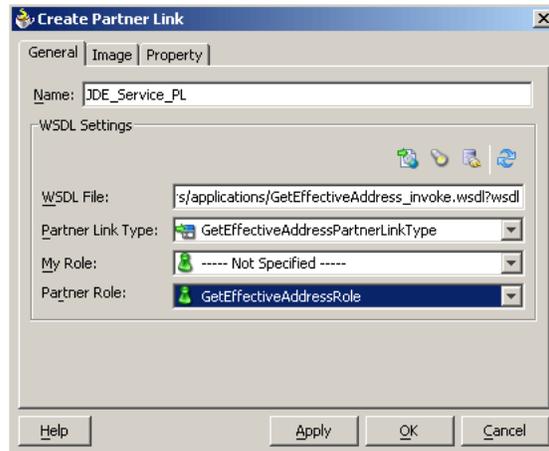

Perform the following steps:


- a. Leave the **My Role** field unspecified. The role of the PartnerLink is null, as it will be synchronously invoked from the BPEL process.
 - b. From the **Partner Role** list, select the default value **GetEffectiveAddressRole**. This is the role of the BPEL process.
5. Click **OK**.
The new PartnerLink appears in the visual editor.
 6. Select **Save** from the File menu.
 7. From the **Process Activities** pane on the right, drag an **Invoke** activity to the visual editor and place it between the Receive activity (`receiveInput`) and the Reply activity (`replyOutput`).

The Invoke process activity is shown in the following diagram view.

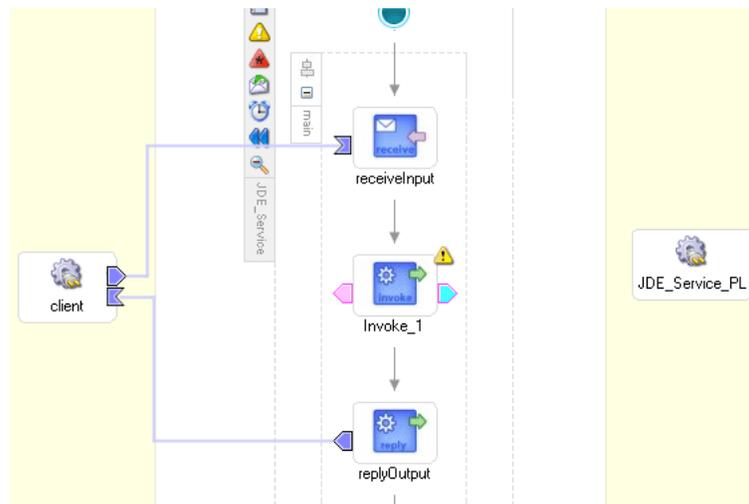

8. Drag the **blue arrow** from `Invoke_1` and connect it to the `JDE_Service_PL` PartnerLink.


The Edit Invoke dialog box is displayed.

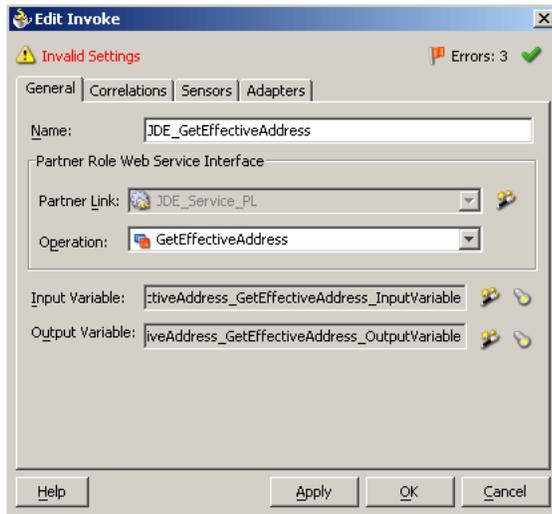


Perform the following steps:

- a. Provide a name for the Invoke activity, for example, **JDE_GetEffectiveAddress**.
 - b. Click the first icon to the right of the **Input Variable** field, then click **OK** in the Create Variable window that is displayed.
 - c. Repeat the previous step to create a default variable for Output Variable.
9. Click **OK**.
 10. Drag an Assign process activity and drop it between `receiveInput` and `JDE_GetEffectiveAddress`.

The following image shows the new Assign activity in JDeveloper visual editor.

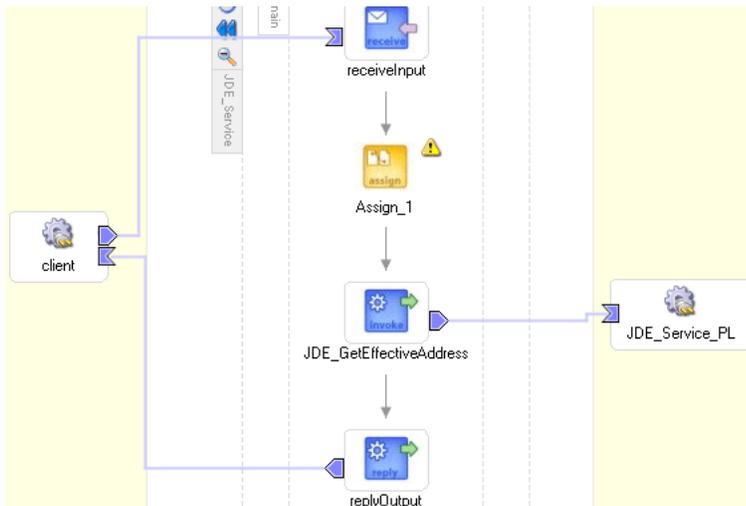

11. Double-click the **Assign** activity icon.
The Assign dialog box is displayed.

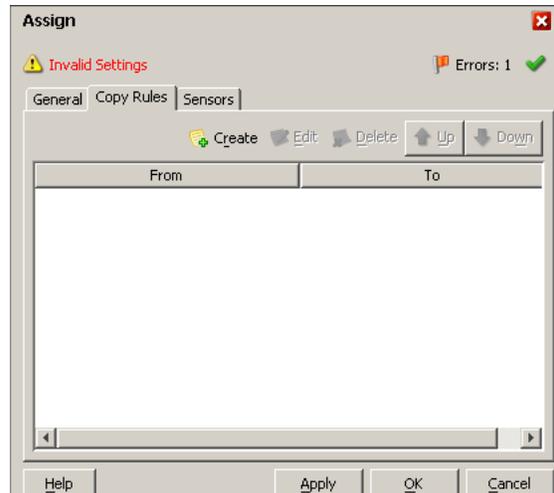


12. In the Copy Rules tab, click **Create**.

The Create Copy Rule dialog box is displayed.


- a. In the **From** pane, expand **Variables**, then **inputVariable**, and then highlight **payload**.
- b. In the **To** pane, expand **Variables**, then **JDE_GetEffectiveAddress_GetEffectiveAddress_InputVariable**, and then highlight **input_GetEffectiveAddress**.

Your Create Copy Rule dialog box should look as follows:

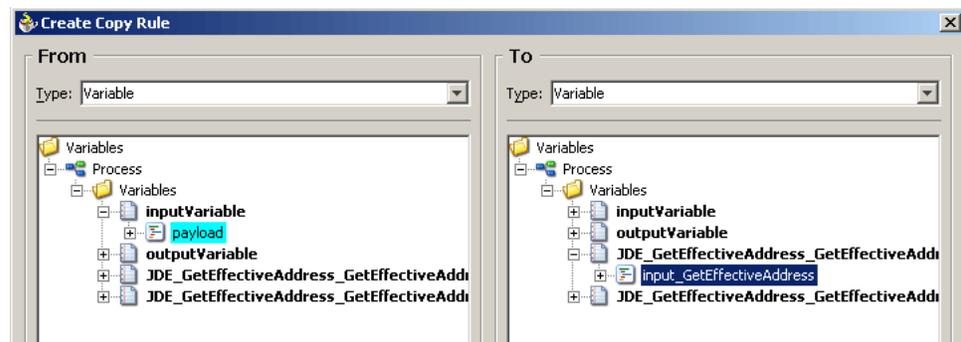

13. To close the Create Copy Rule dialog box and the Assign dialog box, click **OK**.
14. From the **Process Activities** pane on the right, drag another **Assign** activity to the visual editor and place it between the Invoke activity (JDE_GetEffectiveAddress) and the Reply activity (replyOutput).
15. Double-click the **Assign** activity icon and click **Create**.
16. Map **JDE_GetEffectiveAddress_GetEffectiveAddress_OutputVariable**, **output_GetEffectiveAddress** to **outputVariable**, **payload**.

Verify that you have mapped all variables as follows:

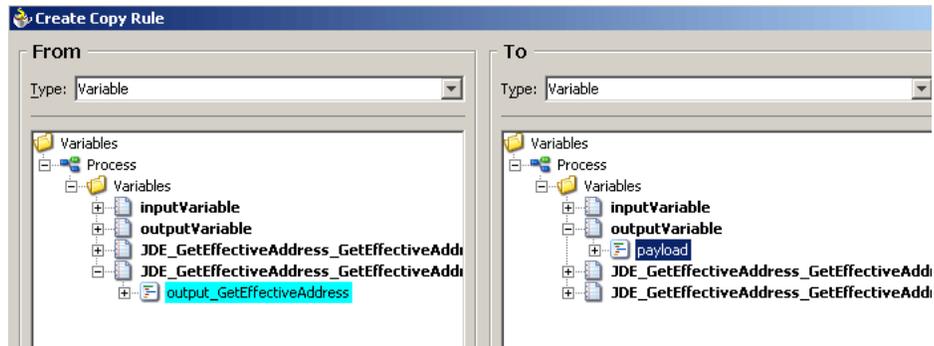

17. Click **OK**, and then click **OK** again.

18. Select **Save** from the File menu.

You have completed the design of your BPEL process.

Deploying the BPEL Process for GetEffectiveAddress (Outbound Service)

JDeveloper deploys BPEL processes directly to Oracle BPEL Console.

To deploy your BPEL process in JDeveloper:

1. Right-click your process flow in the Applications - Navigator pane.
2. Select **Deploy**, then *Your BPEL PM Server connection*, and then **Deploy to default domain**.


The Password Prompt dialog box is displayed.

3. Enter your BPEL Process Manager password in the Password Prompt dialog box.

The deployment process starts automatically after you enter the correct password.

4. Observe the **Messages** log at the bottom of the window.

The Messages log displays the deployment status. In this example, it shows a successful deployment message for the process.

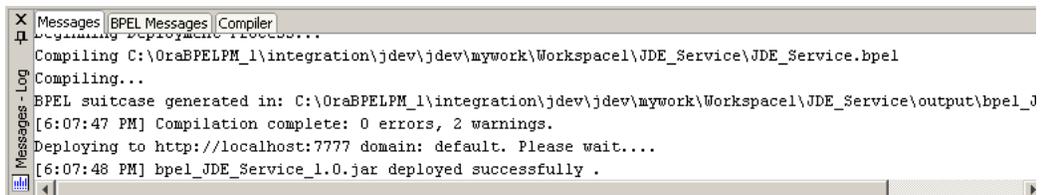

If deployment was not successful, click the **Compiler** tab to view all error and warning messages generated during the deployment process.

Runtime Configuration

To invoke the GetEffectiveAddress process from Oracle BPEL Console:

1. Start the Oracle BPEL Console by entering the following URL in a browser:

`http://host:port/BPELConsole`

2. Select a domain and provide a valid password.
The Oracle BPEL Console main page is displayed.
3. Click the **BPEL Processes** tab.

Your deployed processes are displayed in this tab.

ORACLE BPEL Console

Dashboard | **BPEL Processes**

Locate Processes	Deployed Processes		
Process Name <input type="text"/> State All States ▾ Lifecycle All Lifecycles ▾ <input type="button" value="Go"/>	BPEL Process ↓	Lifecycle	State
	<input type="checkbox"/> CreditRatingService (v. 1.0)	Active	On
	<input type="checkbox"/> JDE_Event (v. 1.0)	Active	On
	<input type="checkbox"/> JDE_Service (v. 1.0)	Active	On
	<input type="checkbox"/> PSFTLOCATION_inbound (v. 1.0)	Active	On
	<input type="checkbox"/> PSFT_outbound (v. 1.0)	Active	On
	<input type="checkbox"/> SAP_GetCCDetail (v. 1.0)	Active	On

4. Click the JDE Service process link, **JDE_Service**.
5. Click the **Initiate** tab.

The Initiate tab enables you to test your BPEL process.

Dashboard | **BPEL Processes**

BPEL Process: JDE_Service Version: 1.0 Lifecycle: Active
 Statistics: [0 Open Instances](#) | [0 Closed Instances](#)

[Manage](#) | **Initiate** | [Descriptor](#) | [WSDL](#) | [Sensors](#) | [Source](#)

Testing this BPEL Process

Initiating a test instance XML Source ▾

To create a new 'test' instance of this BPEL Process, fill the following text area with the XML representa on the 'Post XML Message' button.

```
<?xml version="1.0" encoding="UTF-8" ?>
<jdeRequest type="callmethod">
<callMethod name="GetEffectiveAddress" runOnError="no">
<params>
<param name="mnAddressNumber">99999</param>
<param name="jdDateBeginningEffective"/>
<param name="cEffectiveDateExistence10"/>
<param name="szAddressLine1"/>
<param name="szAddressLine2"/>
<param name="szAddressLine3"/>
<param name="szAddressLine4"/>
<param name="szZipCodePostal"/>
```

Perform the following steps:

- a. From the **Initiating a test instance** list, select **XML Source**.
- b. Enter the following code in the text area provided for XML input:

```
<?xml version="1.0" encoding="UTF-8" ?>
<jdeRequest type="callmethod">
<callMethod name="GetEffectiveAddress" runOnError="no">
<params>
<param name="mnAddressNumber">99999</param>
<param name="jdDateBeginningEffective"/>
<param name="cEffectiveDateExistence10"/>
<param name="szAddressLine1"/>
<param name="szAddressLine2"/>
<param name="szAddressLine3"/>
<param name="szAddressLine4"/>
<param name="szZipCodePostal"/>
<param name="szCity"/>
```

```

<param name="szCountyAddress" />
<param name="szState" />
<param name="szCountry" />
<param name="szUserid" />
<param name="szProgramid" />
<param name="jdDateupdated" />
<param name="szWorkstationid" />
<param name="mnTimelastupdated" />
<param name="szNamealpha" />
</params>
<onError abort="yes" />
</callMethod>
</jdeRequest>

```

6. Click Post XML Message.

Click the **Audit** tab to view the response received from the J.D. Edwards system.

```

<process>
  <sequence>
    receiveInput
      [2005/06/07 06:43:38] Received "inputVariable" call from partner "client" More...
    Assign_1
      [2005/06/07 06:43:38] Updated variable "GetAddressDetail_AddressBookMasterMBF_InputVariable" More...
    GetAddressDetail
      [2005/06/07 06:43:39] Invoked 2-way operation "AddressBookMasterMBF" on partner "AddressBookMasterMBF". More...
    Assign_2
      [2005/06/07 06:43:39] Updated variable "outputVariable" More...
    replyOutput
      [2005/06/07 06:43:39] Reply to partner "client". less
      <outputVariable>
        <part xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" name="payload">
          <demo_processProcessResponse xmlns="http://xmlns.oracle.com/demo_process" user="jde" sessionid="" type="callmethod"
            session="604.1118140134.11" environment="DV7333">
            <callMethod xmlns="urn:iwaysoftware:jde/services/JDEJAVA_CALLBSFN/N0100041/AddressBookMasterMBF" app="" trans=""
              name="AddressBookMasterMBF" runOnError="">
              <returnCode code="0" />
            </callMethod>
          </part>
        </outputVariable>
      </replyOutput>
    </sequence>
  </process>

```

J.D. Edwards OneWorld Event Integration

This example illustrates how OracleAS Adapter for J.D. Edwards OneWorld integrates with J.D. Edwards OneWorld to receive event data. The design-time and runtime configuration procedures are outlined in the following sections.

Design-Time Configuration

Before you design a BPEL process using JDeveloper, you must create a separate channel for every J2CA event and select that channel when you generate WSDL for inbound interaction using Application Explorer.

Note: If two or more events share the same channel, event messages may not be delivered to the right BPEL process.

Creating a Channel in Application Explorer

To create a channel:

1. In Application Explorer, expand the **JDEdwards** node.
2. Right-click the **Channels** node, and select **Add Channels**.


The Add Channel dialog box is displayed.

3. In the **Name** field, enter a descriptive name for the channel.
4. In the **Description** field, enter a description (optional).
5. From the **Protocol** list, choose a protocol for your channel.
6. Click **Next**.

The dialog box is displayed for the selected listener.

7. Enter the location of the server in the **Host** field.
8. Enter the port number of the channel in the **Port Number** field.
9. Select the Synchronization type from the **Synchronization Type** list.
10. Select **Is Length Prefix** for events that send data which is not in XML format. The TCP/IP event application must prefix the data with a 4-byte binary length field when writing the data to the TCP/IP port.
11. Select **Is XML** for events that send data back in XML format. No preparser is required.
12. Select **Is Keep Alive** to maintain a continuous communication between the event transaction and the channel.

13. Click the **preparser** tab.

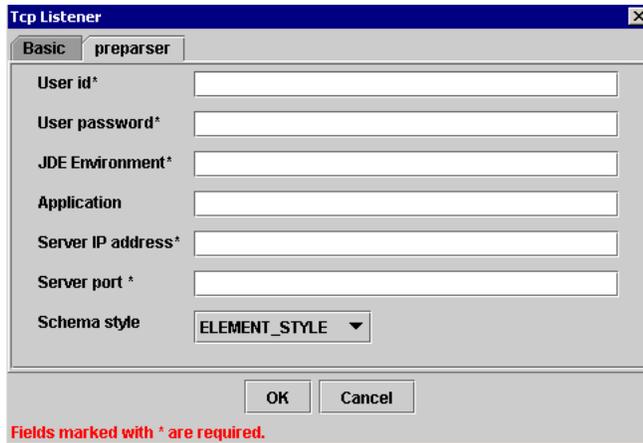

Enter values based on the table.

Parameter	Description
User id*	A valid user ID for J.D. Edwards OneWorld.
User password*	The password associated with the user ID.
JDE environment*	Your J.D. Edwards OneWorld environment. For more information about this parameter, see your J.D. Edwards OneWorld documentation or ask your OneWorld system administrator.
Application	XMLInterop or the application name in J.D. Edwards OneWorld. Optional.
Server IP address*	The name of the server on which J.D. Edwards OneWorld is running. This can be the name of the server, for example, JDEOW, or its IP address, for example, 123.45.67.89.
Server Port*	The port number on which the server is listening, for example, 6009.
Schema style	Choose a style from the list.

Click **OK**.

The channel is created and displayed under the Channels node. An X over the icon indicates that the channel is currently disconnected.

Note: The channel you created in Application Explorer is managed by BPEL PM Server. If you start the channel for testing and debugging purposes, stop it before runtime.

Generating WSDL for Event Notification (Command Prompt Only)

You cannot generate WSDL for J.D. Edwards OneWorld event notification using Application Explorer. To generate WSDL from the command prompt, you must perform the following steps.

Important: You can create inbound J2CA service only if the node you have selected supports events.

To generate a WSDL file for J.D. Edwards OneWorld event notification:

1. Create a channel in Application Explorer under the J.D. Edwards events node. See ["Creating a Channel in Application Explorer"](#) on page 5-12 .
2. Start the channel.
Important: Do not restart the BPEL PM Server or Oracle Application Server after the channel is started.
3. Send an inbound message from J.D. Edwards OneWorld.
4. Capture the inbound message payload in the log file located under *OracleAS_home\adapters\application\config\jca_sample\log*
Alternatively, you can create a port with the File protocol under Event in Application Explorer to dispose the event message to the file system.
5. Use a third party tool such as XMLSpy to create the XSD schema using the XML payload captured in the previous step.
6. Verify that *orabpel-adapters.jar* is in your classpath.
7. Open a command prompt and change directory to:
OracleAS_home\adapters\application\tools
8. Run *obadapter.bat* to set the environment.
9. Enter the following command to generate WSDL:

```
java oracle.tip.pc.infra.wsil.IWayWSILBrowser jcaHome\jcaConfig adapter target
channel schemaPrefix wsdlFileName
```

Where:

- *jcaHome* is the path to your J2CA configuration. For example, *OracleAS_home\adapters\application*
- *jcaConfig* is the JCA configuration created in Application Explorer. The default is *jca_sample*.
- *adapter* is the name of the adapter. For example, *JDEdwards*.
- *target* is the name of the adapter target you created under Adapter in Application Explorer
- *channel* is the name of the channel you have created under Event in Application Explorer
- *schemaPrefix* is the prefix of the XSD schema. The schema file must be in the same directory where the Java command is executed, for example, *OracleAS_home\adapters\application\tools*
- *wsdlFileName* is the name of the WSDL file being created in this procedure

For example:

```
I:\oracle\AS\adapters\application\tools>java
oracle.tip.pc.infra.wsil.IWayWSILBrowser I:\oracle\AS\adapters\application\
jca_sample JDEdwards JDE JDE SalesOrder SalesOrder.wsdl
```

Note: It is good practice to append *_receive* to the names of WSDL files generated for event notification services. This will allow you to easily differentiate between them and those generated for request-response services.

10. Stop the channel in Application Explorer.

Note: You can organize your WSDL files in subfolders, creating your own WSDL hierarchy structure. Create the folders under *OracleAS_home\adapters\application\wsdl*. The WSIL browser in JDeveloper will display the full tree structure of your WSDL hierarchy.

The WSDL file is created. You can now create a BPEL process that uses the WSDL as Partner Link. As the BPEL process is deployed, the channel is activated from BPEL PM. Then, after you send an inbound message from J.D. Edwards OneWorld, the message will be received by the channel started by BPEL PM. These procedures are described in detail in the following sections.


Creating a BPEL PM Server Connection

Before you design a BPEL process, you must create a connection to your BPEL Server using JDeveloper. See "[Creating a BPEL PM Server Connection](#)" on page 5-2 for details on how to create the connection.

Designing the BPEL Process for the SalesOrder Inbound Service


To design a BPEL process for inbound interaction:

1. Click the **Applications** tab and select a workspace for your project.

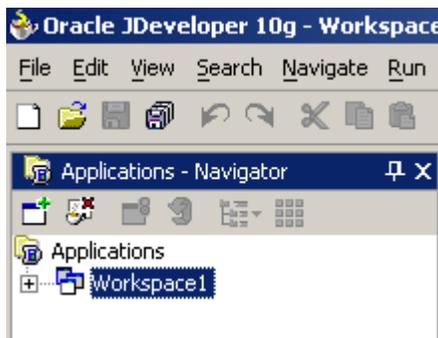


2. Right-click the workspace and select **New Project**.

The New Gallery window is displayed.

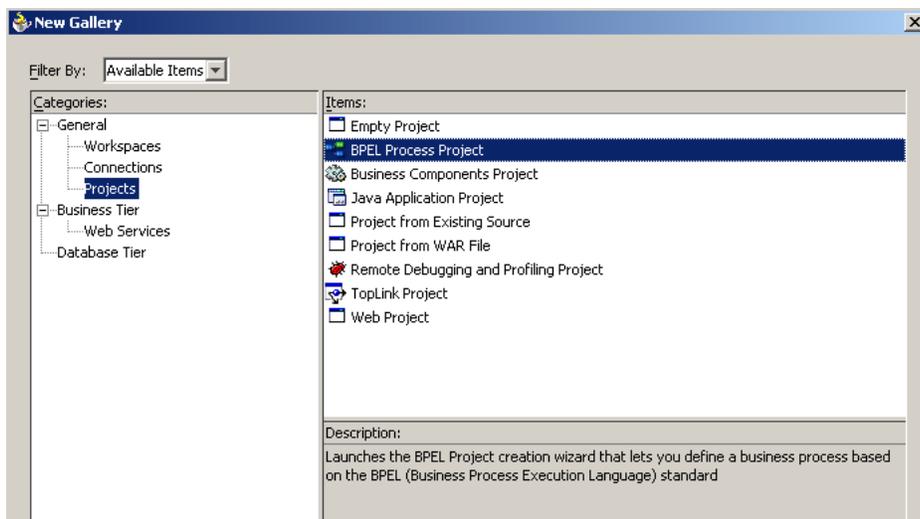


3. From the Items list, select **BPEL Process Project** and click **OK**.

The BPEL Process Project dialog box is displayed.

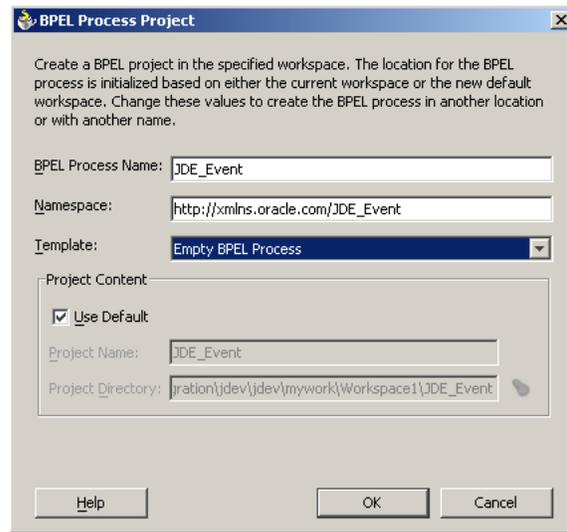

4. Perform the following steps:
 - a. Specify a name for the process.
The Namespace field is updated automatically.
 - b. From the Template list, select **Empty BPEL Process**.
 - c. Click **OK**.
5. From the Process Activities pane on the right, drag and drop a **PartnerLink** to the visual editor.

The Create Partner Link dialog box is displayed.

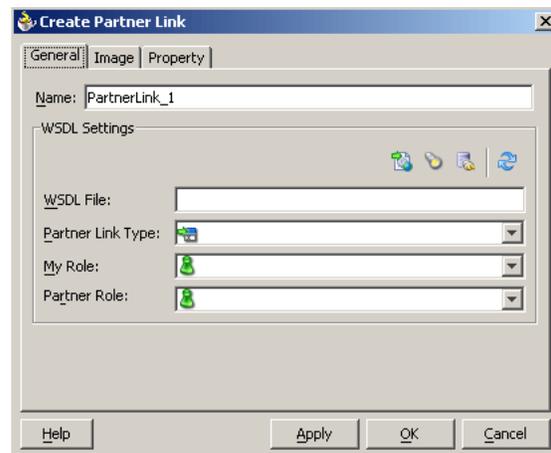


6. Click the **WSIL browser** icon (second icon from the left preceding the **WSDL File** field).

The WSDL Chooser dialog box is displayed.




7. Expand your BPEL Server connection, then expand **adapters**, and then **applications**.

The WSDL Chooser dialog box is displayed.

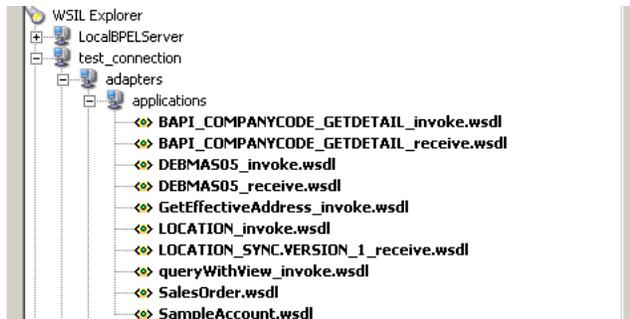

8. Select **SalesOrder.wsdl** and click **OK**.

The Create Partner Link dialog box is displayed.

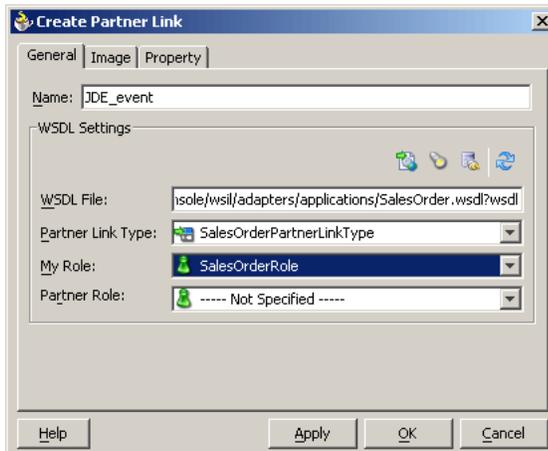


The **WSDL File** field displays the name and location of the selected WSDL file. The **Partner Link Type** field specifies the PartnerLink defined in the WSDL file.

Perform the following steps:


- a. From the **My Role** list, select the default value **SalesOrderRole**.
 - b. Leave the **Partner Role** field unspecified.
9. Click **Apply**, and then click **OK**.

The new PartnerLink appears in the visual editor.

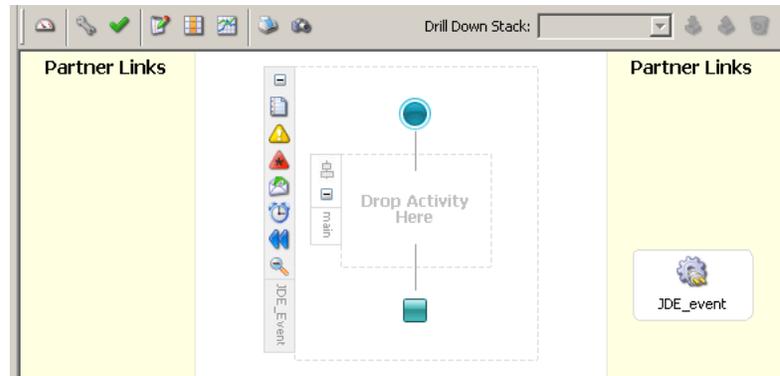

10. From the **Process Activities** pane on the right, drag a **Receive** activity to the visual editor and place it in the designated placeholder labeled **Drop Activity Here**.
11. Connect the Receive activity to the JDE_event PartnerLink.

The Edit Receive dialog box is displayed.

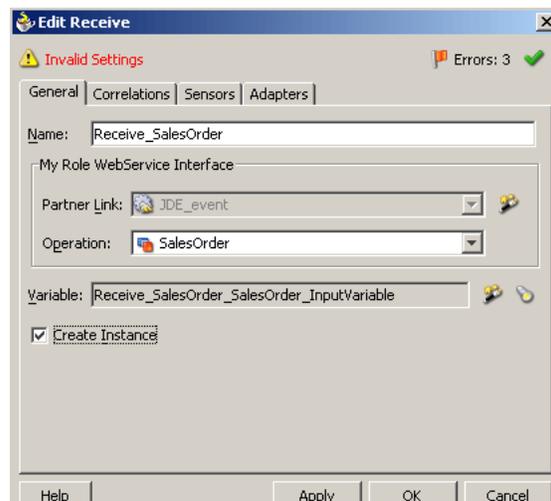


Perform the following steps:

- a. Specify a name for the Receive Activity, for example, **Receive_SalesOrder**.
 - b. Click the first icon to the right of the **Variable** field, then click **OK** in the Create Variable dialog box that is displayed.
 - c. Verify that the **Create Instance** check box is selected.
12. Click **Apply**.
- The Receive dialog box should no longer display any warnings or errors.
13. Click **OK**.
 14. Select **Save** from the **File** menu.

Deploying the BPEL Process for the Inbound Service

1. Right-click your process flow in the Applications - Navigator pane.
2. Select **Deploy**, then *Your BPEL PM Server connection*, and then **Deploy to default domain**.
3. When prompted, enter your BPEL Process Manager password and click **OK**.

The deployment process starts automatically after you enter the correct password.

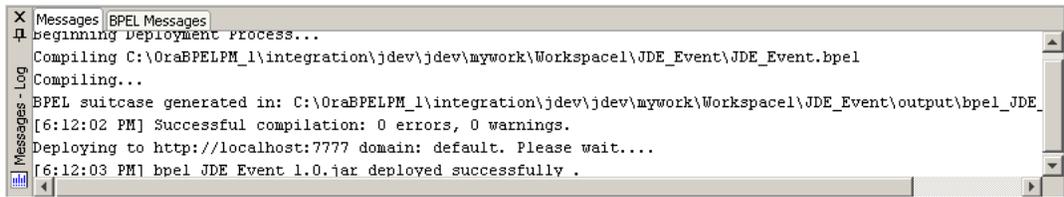


Runtime Configuration

Events are generated as a result of activity in a database or in an application system. You can use events to trigger an action in your application. See "[Configuring an Event Adapter](#)" on page 2-19 for more information on event configuration.


Triggering an Event in J.D. Edwards OneWorld

To trigger an event in J.D. Edwards OneWorld:

1. Log in to your J.D. Edwards OneWorld system.
2. In the **Fast Path** field of the J.D. Edwards OneWorld Explorer window, type **G4211** and press **Enter**.

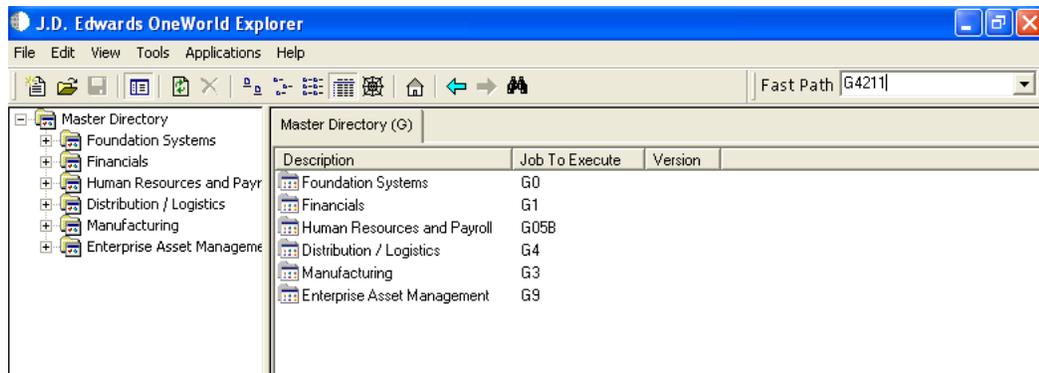


3. Right-click **Sales Order Detail** (P4210).

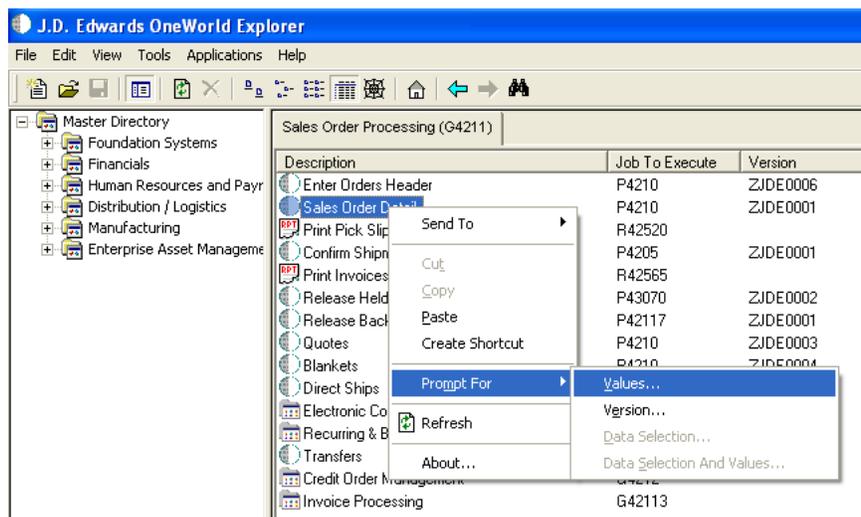

4. Select **Prompt for**, and then **Values**.


The Processing Options dialog box is displayed.

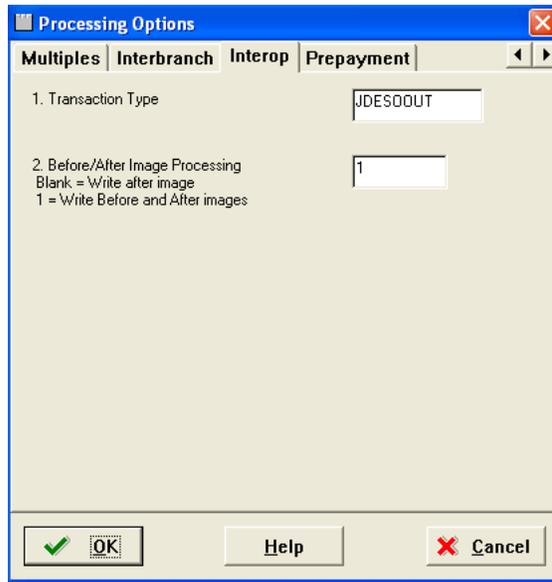

Perform the following steps:

- a. Click the **Interop** tab.
 - b. In the **Transaction Type** field, type **JDES00UT**.
 - c. Verify that the value in the **Before/After Image Processing Blank** field is **1**.
5. Click **OK**.

The **Sales Order Detail - (Customer Service Inquiry)** window is displayed.

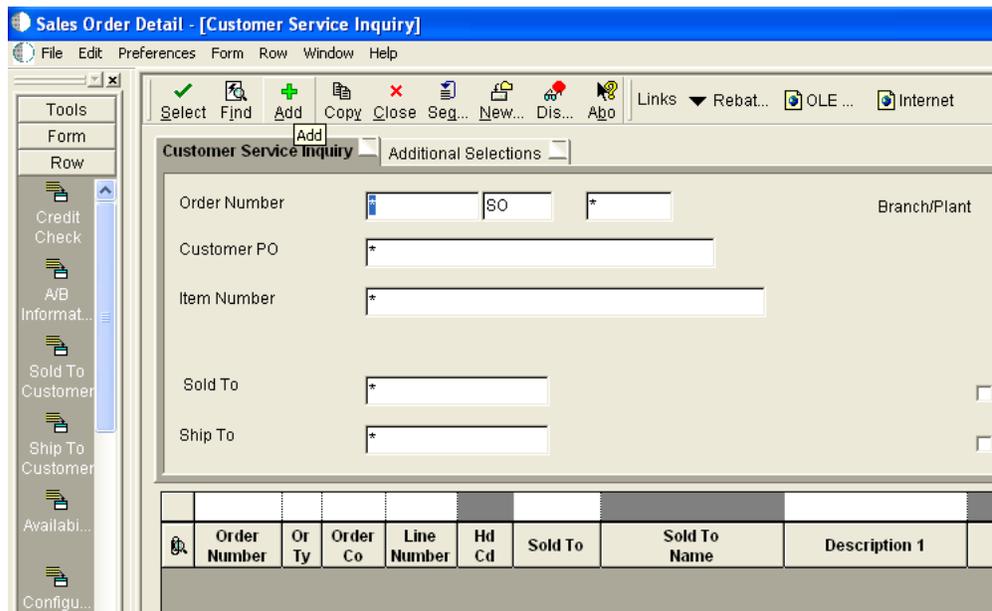

6. Click the **Add** icon (third icon from left).
7. Enter the values as shown in the following screen.
To move to a different field, use the **Tab** key on your keyboard.

Order Number: 3350 SO 00200 Branch/Plant: M30

Sold To: 4242 Capital System Order Date: 6/20/2005

Ship To: 4242 Capital System Cust PO:

Currency: USD Exchange Rate: Base: USD Foreign:

Quantity Ordered	UoM	Item Number	Ln Ty	Unit Price	Extended Price	Branch/Plant	Location	Lot Number	Ln Num
			S	0.0000					1

8. Enter a value for **Quantity Ordered** and **Item Number**.

For example:

Order Number: 3350 SO 00200

Sold To: 4242 Capital System

Ship To: 4242 Capital System

Currency: USD Exchange Rate:

Quantity Ordered	UoM	Item Number	Ln Ty	Unit Price	Extended Price
1		210	S	0.0000	
			S	0.0000	

9. Click the first field in the second row and allow a few seconds for processing.

Order Number: 3350 SO 00200

Sold To: 4242 Capital System

Ship To: 4242 Capital System

Currency: USD Exchange Rate:

Quantity Ordered	UoM	Item Number	Ln Ty	Unit Price	Extended Price
1	EA	210	S	5.0000	5.00
			S	0.0000	

10. Click **OK**.

An event is triggered in the J.D. Edwards OneWorld system.

Verifying the Results

To verify your results:

1. Log in to Oracle BPEL Console at

`http://host:port/BPELConsole`

2. Enter the password for your BPEL domain.

The default password is `bpel`.

3. Click the **Instances** tab.

Recently received runtime events are displayed in the Instances tab.

	Dashboard	BPEL Processes	Instances	Activities
List of BPEL Process Instances 1 - 8				
	Instance	BPEL Process	Last Modified ↑	
✓	802 : Instance #802 of JDE_Event	JDE_Event (v. 1.0)	5/20/05 12:36:12 PM	
✓	801 : Instance #801 of demo_process_inbound	demo_process_inbound (v. 1.0)	5/20/05 12:35:55 PM	
✓	601 : Instance #601 of Siebel_Event	Siebel_Event (v. 1.0)	5/18/05 2:24:15 PM	

4. Click your J.D. Edwards event instance, and then click **Audit** to see the received event message.

```

<process>
  <sequence>
    Receive_1
      [2005/06/07 06:59:29] Received "Receive_1_SalesOrder_InputVariable" call from partne
      <Receive_1_SalesOrder_InputVariable>
        <part xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" name="event_SalesOrder"
          <jdeResponse xmlns="urn:Schemas-jdedwards-com:trans.response.JDES00OUT" user="JDEt
            environment="DV7333">
          <transaction action="transactionInfo" type="JDES00OUT">
            <returnCode code="0">XML Request OK</returnCode>
            <key>
              <column name="EdiUserId">JDE</column>
              <column name="EdiBatchNumber">15168</column>
              <column name="EdiTransactNumber">106062</column>
            </key>
            <table type="Header" name="F4201Z1">
              <column name="EdiUserId">JDE</column>
              <column name="EdiBatchNumber">15168</column>
              <column name="EdiTransactNumber">106062</column>
              <column name="EdiLineNumber">1.000</column>
              <column name="EdiDocumentType">SO</column>
              <column name="TypeTransaction">JDES00OUT</column>
              <column name="EdiTranslationFormat" />
              <column name="EdiTransmissionDate" />
              <column name="DirectionIndicator">2</column>
            </table>
          </transaction>
        </jdeResponse>
      </part>
    </sequence>
  </process>
  
```

InterConnect Integration Examples

This chapter contains the following examples:

- [J.D. Edwards OneWorld Service Integration](#)
- [J.D. Edwards OneWorld Event Integration](#)

The scenarios shown in this chapter require the following prerequisites.

Prerequisites

The following are installation and configuration requirements:

- OracleAS Adapter for J.D. Edwards OneWorld must be installed on Oracle Application Server.
- OracleAS Database adapter must be deployed and properly configured.
- OracleAS Integration InterConnect Adapter Plugin for EIS must be installed and running.

See Also: *Oracle Application Server Adapters Installation Guide*

The examples in this chapter present the configuration steps necessary for demonstrating service and event integration with J.D. Edwards OneWorld. Prior to using this material, you must be familiar with the following:

- How to configure OracleAS Adapter for J.D. Edwards OneWorld for services and events. For more information, see [Chapter 2, "Configuring OracleAS Adapter for J.D. Edwards One World"](#).
- How to configure OracleAS Integration InterConnect iStudio (iStudio) for service and event interactions. All required steps are shown in the examples.

See Also: *Oracle Application Server Integration InterConnect User's Guide*

Overview of InterConnect Integration

InterConnect provides a comprehensive application integration framework. OracleAS Adapter for J.D. Edwards OneWorld used in conjunction with InterConnect enables you to seamlessly integrate enterprise software, eliminating the need to write custom code. Functional modeling, as opposed to custom coding solutions, allows for software reuse and reduces the complexity and management challenges that arise over the software lifecycle. This integration model consists of two components--high-level integration logic and low-level platform services.

Adapter integration with OracleAS InterConnect is a two-step process:

1. **Design Time:** OracleAS Adapter for J.D. Edwards OneWorld is configured in Application Explorer for services and events, as described in [Chapter 2, "Configuring OracleAS Adapter for J.D. Edwards One World"](#). Integration logic is modeled in iStudio. Metadata are stored in repositories.
2. **Runtime:** The underlying platform treats this metadata as runtime instructions to enable the communication between participating applications.

J.D. Edwards OneWorld Service Integration

This topic illustrates J.D. Edwards service integration. It describes design-time and runtime procedures.

Design-Time Configuration

The following procedures describe how to start the InterConnect repository, create a common view, and define invoked and implemented procedures. Then, it describes how to export PL/SQL code from iStudio.

Starting the Repository

To start the InterConnect repository, double-click the `start.bat` file located in the following directory:

```
InterConnect_home\repository\start.bat
```

Where `InterConnect_home` is the directory where InterConnect is installed, for example, `C:\OraHome_1\integration\interconnect\`.

Creating a Common View

To create a Common View:

1. Start iStudio.

The iStudio `start.bat` file is located in the following directory:


```
InterConnect_home\istudio\iStudio.bat
```



2. Open a new project.
3. Open **Common Views** and **Business Objects**.
4. Create a Business Object called **JDEAddressFL** and a new procedure under **GetEAddress**.

Note: The procedure name must be the root element of the DTD generated from Application Explorer. In this example, the root element in the DTD is `GetEAddress`.

The Create Procedure window is displayed.

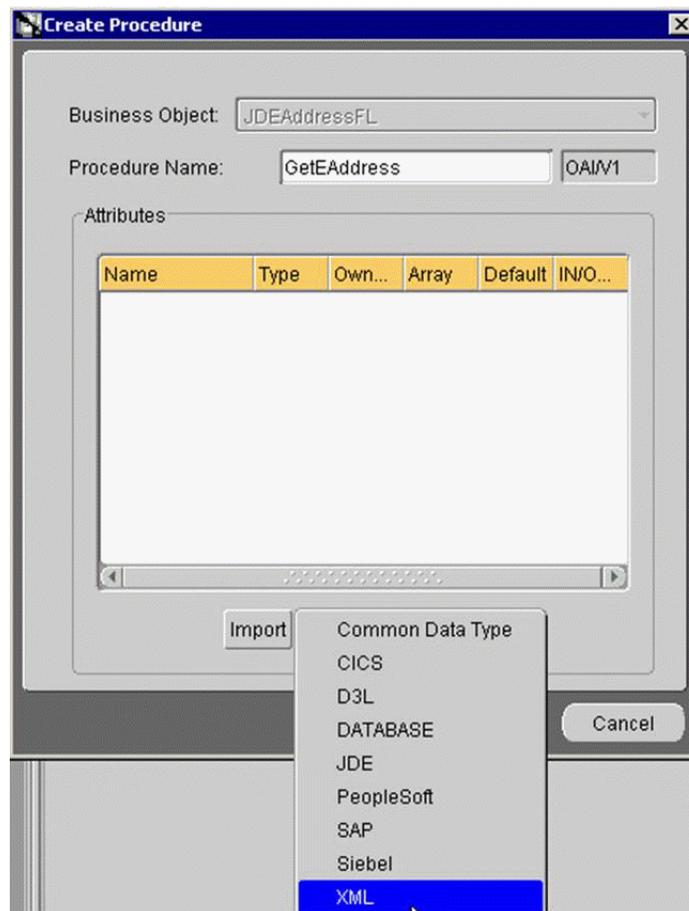

5. Click **Import** and select **XML** from the list.
6. Open the DTD generated from Application Explorer.
Click **OK**.
7. Choose the **IN arguments** radio button, and click **OK**.
8. Select **jdeRequest**.

Ensure your parameters are similar to [Figure 6-1](#) for both the In and Out parameters.

Figure 6–1 In and Out Parameters

Business Object: JDEAddressFL
 Procedure Name: GetEAddress Owner/Version: OAIW1

Attributes


Name	Type	Owner/V...	Array	Default	IN/OUT/INOUT
☐ jdeRequest	jdeRequest	OAIW1	<input type="checkbox"/>	NULL	IN
SERVICENAME	String		<input type="checkbox"/>	GetEffectiveAdd	IN
METHODNAME	String		<input type="checkbox"/>	GetEffectiveAdd	IN
LICENSE	String		<input type="checkbox"/>	production	IN
user	String		<input type="checkbox"/>	NULL	IN
sessionid	String		<input type="checkbox"/>	NULL	IN
type	String		<input type="checkbox"/>	callmethod	IN
session	String		<input type="checkbox"/>	NULL	IN
environment	String		<input type="checkbox"/>	NULL	IN
pwd	String		<input type="checkbox"/>	NULL	IN
callMethod	String		<input type="checkbox"/>	NULL	IN
AddressNumber	String		<input type="checkbox"/>	NULL	IN
AddressField	String		<input type="checkbox"/>	NULL	IN
CustomerName	String		<input type="checkbox"/>	NULL	OUT
Street	String		<input type="checkbox"/>	NULL	OUT
City	String		<input type="checkbox"/>	NULL	OUT
State	String		<input type="checkbox"/>	NULL	OUT
ZIPCode	String		<input type="checkbox"/>	NULL	OUT

9. Click **Save**.

Invoking a Procedure


To invoke a procedure:

1. Create a new application called **DBAPP**.
2. Right-click **Invoked Procedures** and select **New**.
 The Invoke Wizard - Select a Procedure dialog box is displayed.

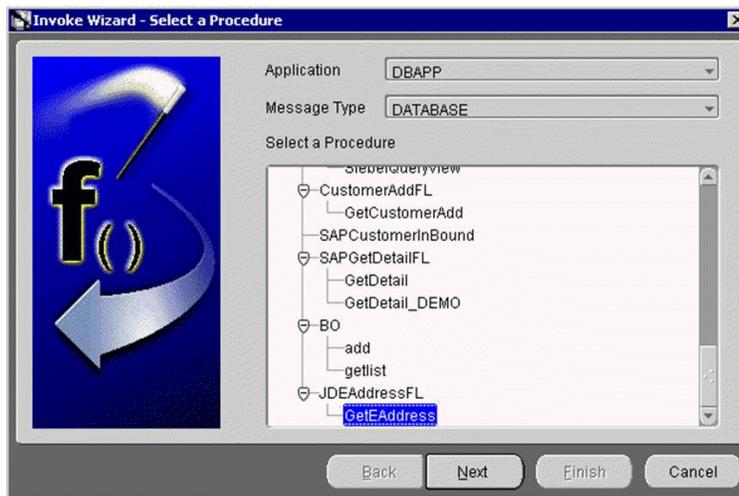


3. From the **Message Type** list, select **DATABASE**.
4. To select the procedure, choose **GetEAddress** under **JDEAddressFL**.
5. Click **Import** and select **Common View**.

The structure is loaded as follows. Because this is a request and response, ensure that **Synchronous** is selected.

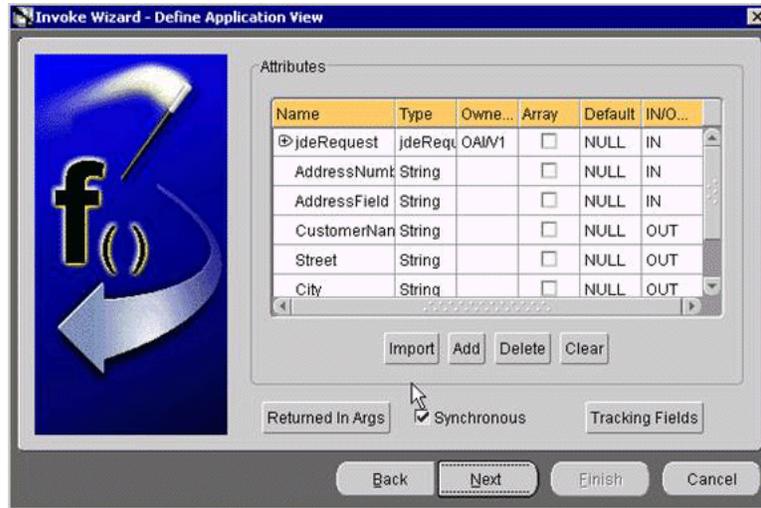


- Click **Next**, and then **New** to create a mapping between the Common View and the Application View for the In parameters.

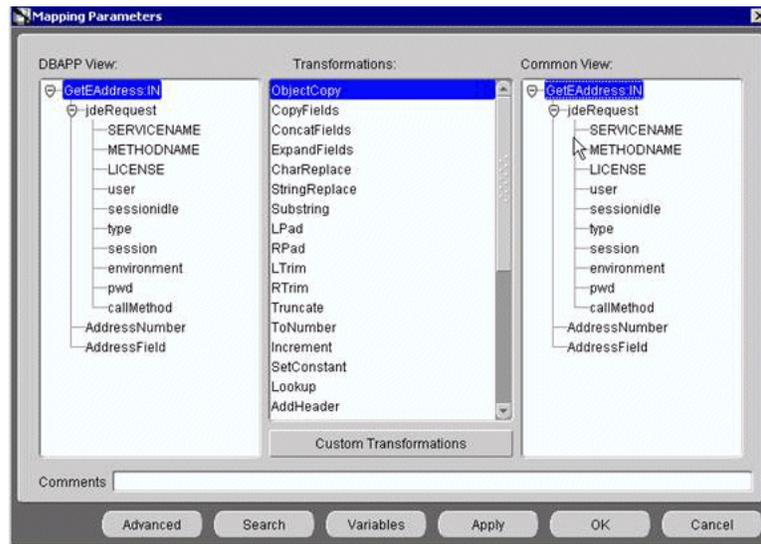


In this case, the Application View and the Common View have the same structure and can be mapped using the ObjectCopy transformation.

- Click **Apply** and then **OK**.

The second Mapping Parameters dialog box is displayed.

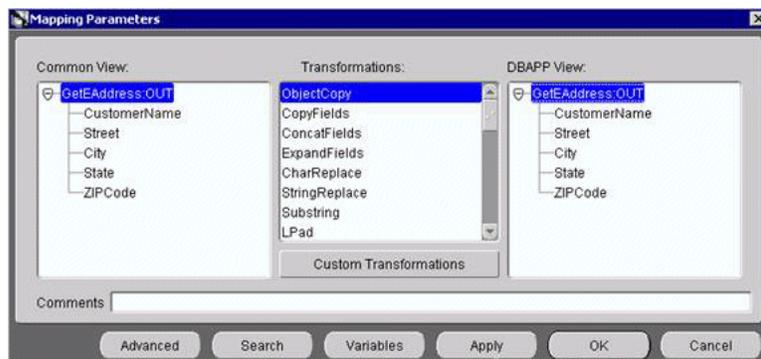

8. Click **Apply** and then **OK**.
9. The Define Stored Procedures dialog box is displayed.

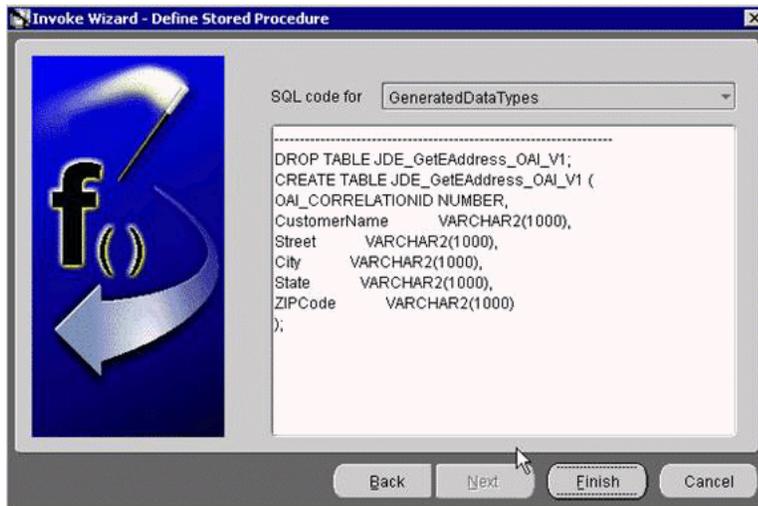


Some SQL code is automatically generated.

10. Click **Finish**.

Implementing a Procedure


In this implemented procedure, a new application called JDEAddressBook is created.

1. Create a new application named JDEAddressBook.
2. Expand the application and right-click **Implemented Procedure**.
3. To create an implemented procedure, select **New**.

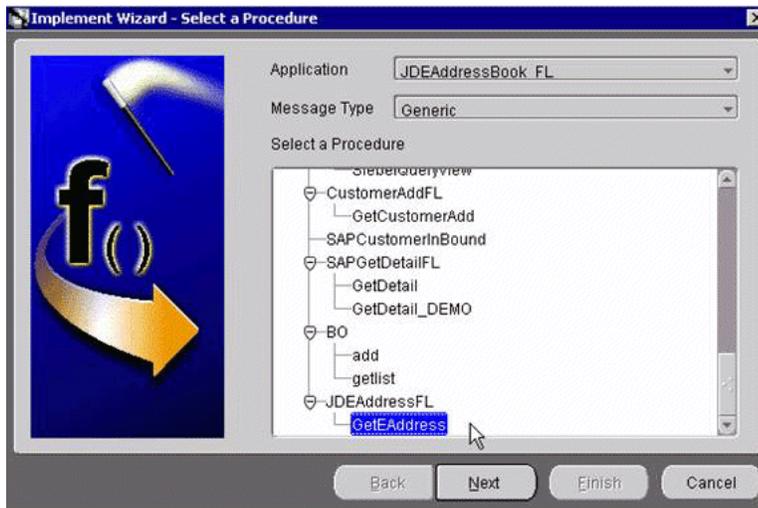


4. Select **Generic** as the message type.
5. Expand **JDEAddressFL** and select **GetEAddress**.
6. Click **Next**.
7. Click **Import** and select **XML**.

8. Navigate to the location of the request and response DTDs generated by Application Explorer and import both into iStudio.

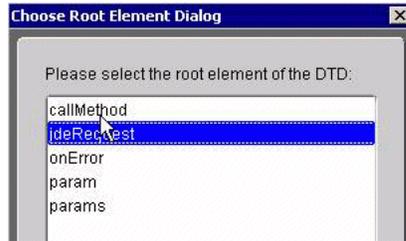


9. Select **jdeRequest** as the root element of the DTD.
10. Choose the **IN arguments** option button, and click **OK**.

The Implement Wizard - Define Application View window is displayed.

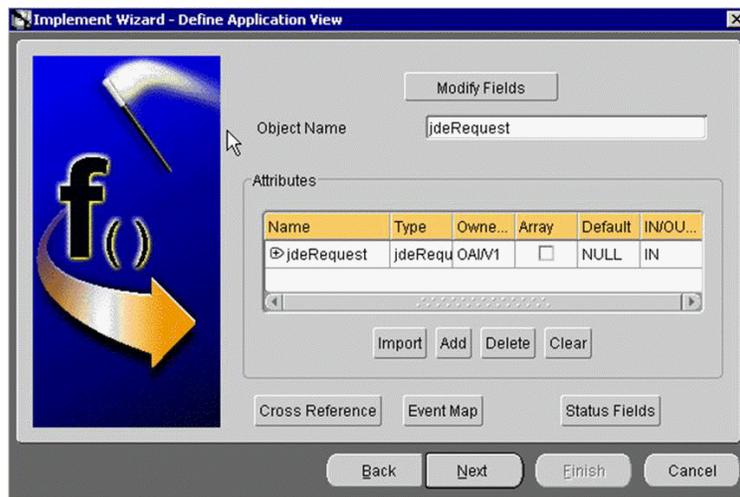


11. Click **Import**, and then click **Next**.

The Choose Root Element Dialog pane is displayed.

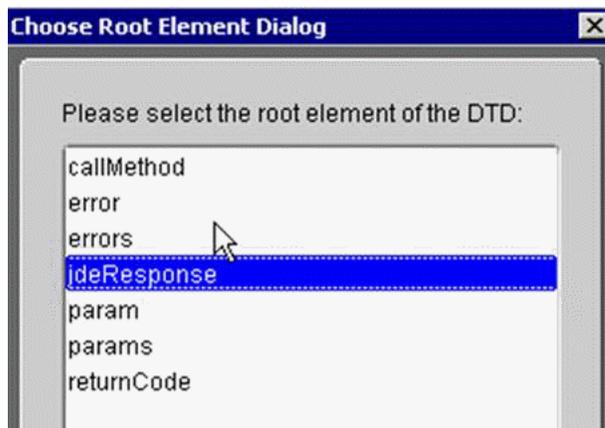


12. Choose **jdeResponse** and click **Next**.

The Choose Import Type dialog box is displayed.

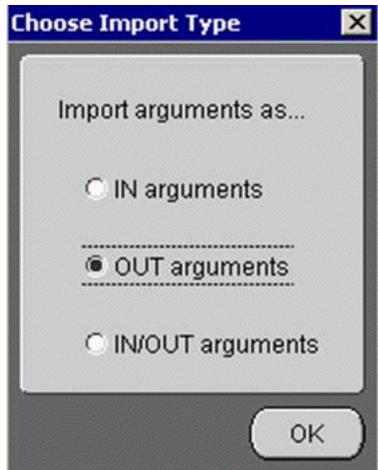


13. Select **OUT arguments**, and click **Next**.

The Define Application View window is displayed.

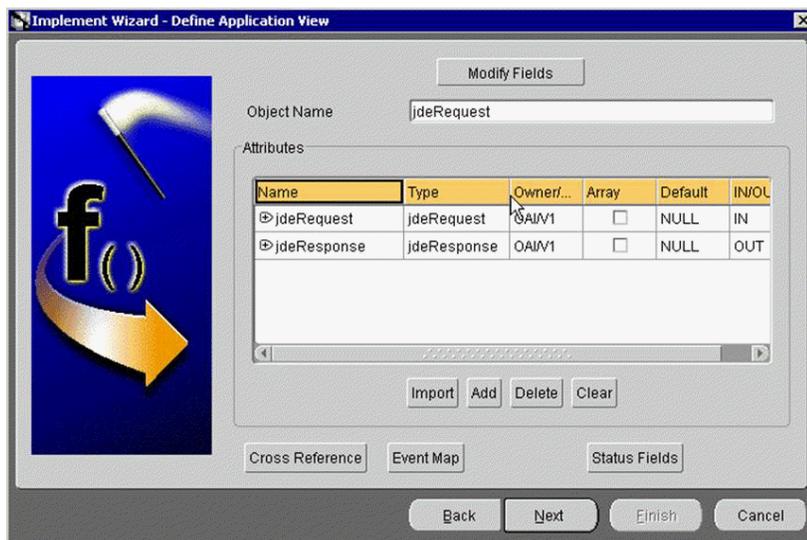

14. Click **Next**.


The Mapping Parameters window is displayed.

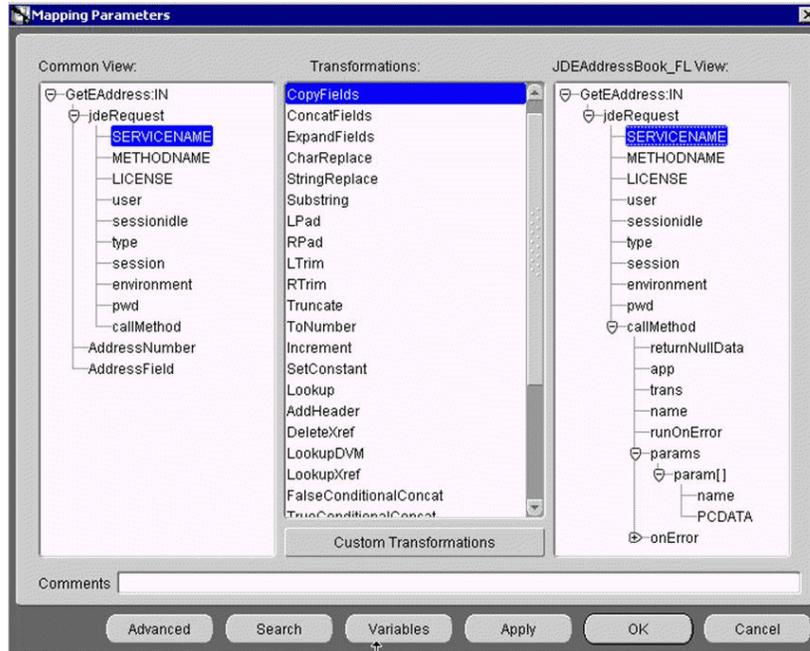

In this example, the Application View and Common View have the same structure. All the attributes can be mapped by using the ObjectCopy transformation.


15. Select **Copy Fields** in the **Transformations** field, and click **OK**.

The Define Mapping:IN Arguments window is displayed.

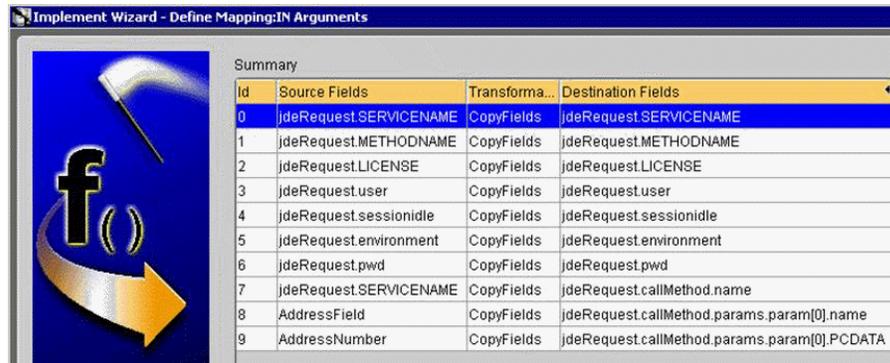


16. Click **Next**.

The Mapping Parameters window is displayed for the OUT parameters.

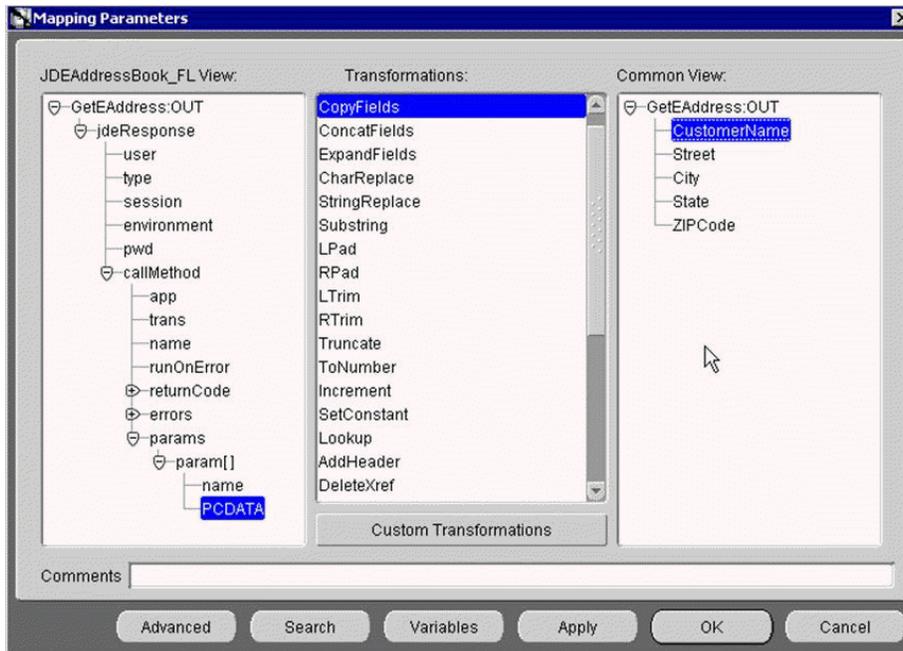

17. Ensure **Copy Fields** is selected in the **Transformation** field, and then click **OK**.
 The Define Mapping:OUT arguments window is displayed.

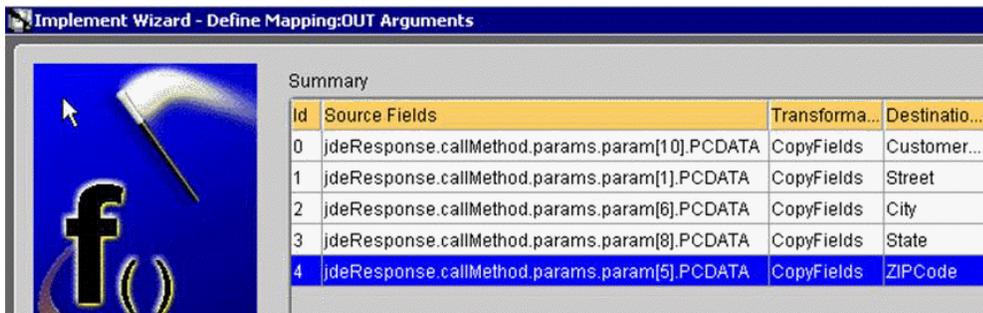


18. Click **Next**, and then click **Finish**.
 The application definition for an invoked procedure is now complete.


Exporting PL/SQL Code from iStudio

You must export the PL/SQL code created in "Invoking a Procedure" on page 6-4 and execute it against the appropriate schema. In this example, the schema used is DBAPP_JDEAddressFL.

To export PL/SQL code from iStudio:

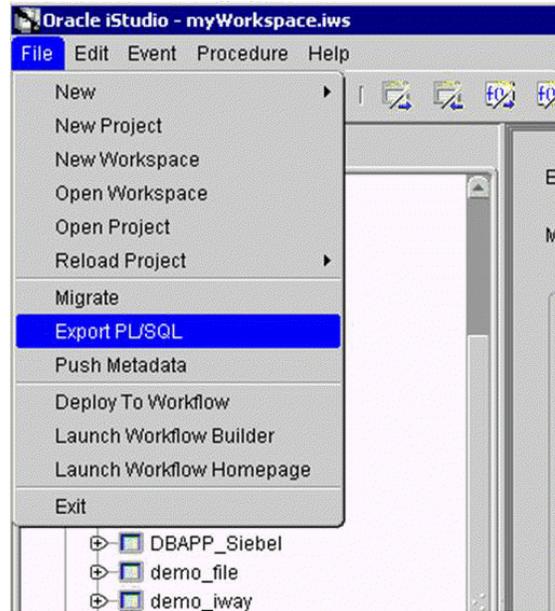

1. In iStudio, click **File** and **Export PL/SQL**.
The Export Application dialog box is displayed.

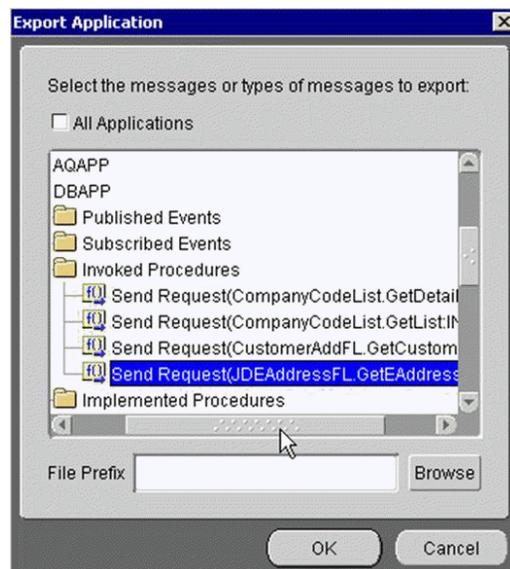

Perform the following steps:

- a. Select the application from which to export PL/SQL.
 - b. Type or browse to the file prefix (path to the application).
2. Click **OK**.

In this example, two SQL scripts are created:

- DBAPP_JDEAddressFLTYPES.sql
 - DBAPP_JDEAddressFL.sql
3. Log on to the database with the appropriate privileges (in this example, DBAPP_JDEAddress) and execute the following in the order given:

- DBAPP_JDEAddressFLTypes.sql
 - DBAPP_JDEAddressFL.sql
4. Create another stored procedure, JDEADDRESSFL_EXE, in the same schema. It executes at runtime to create the database message that is sent to the hub.

```
CREATE OR REPLACE PROCEDURE "DBAPP"."JDEADDRESSFL_EXE" (  
servicename LONG,  
methodname LONG,  
license LONG,  
customerid LONG  
)  
AS  
moid NUMBER;  
aoid NUMBER;  
coid NUMBER;  
businessname LONG;  
address LONG;  
city LONG;  
state LONG;  
phone LONG;  
country LONG;  
detailid NUMBER;  
BEGIN  
JDEAddressFL.crMsg_GetEAddress_OAI_V1(moid, aoid);  
jdeid := JDEAddressFL.cr_jdeRequest_jdeRequest  
(servicename,methodname,license,username,sessionidle, calltype, sessionid,  
environment, pwd, callmethod, moid,aoid);  
coid := JDEAddressFL.inv_GetEAddress_OAI_  
V1(moid,'DBAPP',' ',customername,street,city,state,zipcode);  
COMMIT;  
END;
```

Editing the adapter.ini File

The adapter.ini file located under *InterConnect_home\adapters\appname* may require editing as described in the following procedure. If the following information is missing in adapter.ini, you must add it manually.

1. Open the adapter.ini file located under

InterConnect_home\adapters\appname

Where appname is the name of the application you created.

2. Add the following two lines to adapter.ini:

```
// Bridge class  
bridge_class=com.iwaysoftware.iwbridge.IWBridge  
  
// IBSE URL  
ibse_url=http://hostname:port/ibse/IBSEServlet/XDSOAPRouter
```

Where hostname is the name of the Oracle Application Server host and port is the server port number. The default server port number for Oracle Application Server is 7777.

Runtime Configuration

The following topic describes how to verify service integration using the OracleAS Adapter for J.D. Edwards OneWorld.

Verifying Service Integration

To verify service integration:

1. Start Oracle Application Server or ensure that the server is running.
2. If necessary, restart OC4J by issuing the following command:

```
OracleAS_home\opmn\bin\opmnctl stopproc process-type=home
OracleAS_home\opmn\bin\opmnctl startproc process-type=home
```

3. Check the status of OC4J by issuing the following command:

```
OracleAS_home\opmn\bin\opmnctl status
```

The expected output is a list of the processes in the instance, as in the following:

iAS-component	Process-type	PID	Status
DSA	DSA	N/A	Down
HTTP_Server	HTTP_Server	1592	Alive
LogLoader	logloaderd	N/A	Down
dcm-daemon	dcm-daemon	3016	Alive
OC4J	home	3496	Alive
WebCache	WebCache	1800	Alive
WebCache	WebCacheAdmin	1804	Alive

4. Start the adapter using `start.bat`.

```
InterConnect_home\adapters\JDEAddressBook_FL\start.bat
InterConnect_home\adapters\DBAPP\start.bat
```

5. Log on to SQL*Plus with DBAPP and issue the following command:

```
exec
jdeaddressfl_exe
('GetEffectiveAddress','GetEffectiveAddress','test','JDE','callmethod','DV733
3','JDE','GetEffectiveAddress','4242','mnAddressNumber');
```

Figure 6–2 shows the JDEAddress_FL example. It receives a reply from J.D. Edwards OneWorld and returns the reply to the hub.

Figure 6–2 JDEAddress_FL Test Results

```

JDE - start.bat
<?xml version = '1.0' encoding = 'UTF-8'?>
<!DOCTYPE MSG>
<MSG>
<H>
  <B0>JDEAddressFL</B0>
  <EN>GetEAddress</EN>
  <EU>OAI/U1</EU>
  <MU>OAI/U1</MU>
  <T>2</T>
  <SN>JDEADDRESSBOOK_FL</SN>
  <SA>JDEADDRESSBOOK_FL</SA>
  <SAID>57</SAID>
  <CI>DBAPP1096053484390</CI>
  <EG>UTF-8</EG>
  <IK = "dbbridge.correlationid">172</I>
</H>
<B>
  <A0 N = "GetEAddress_OUT_CO">
    <A N = "CustomerName">Capital System
    <A N = "Street">400 Broadland Road NW
    <A N = "City">Atlanta
    <A N = "State">GA
    <A N = "ZIPCode">30342
  </A0>
</B>

```

Figure 6–3 shows the DBAPP example. It receives a reply from the hub and writes the data to the database table.

Figure 6–3 DBAPP Test Results

```

DBAPP - start.bat
City: Atlanta
State: GA
ZIPCode: 30342
]
Inbound Transform Engine: done transforming message. Message will now be given
to the Bridge.
JDEAddressFL.GetEAddress:OAI/U1,OAI/U1,false,2
CustomerName: Capital System
Street: 400 Broadland Road NW
City: Atlanta
State: GA
ZIPCode: 30342
db_bridge_writer_1 has received a message that it will now attempt to write to t
he database.
JDEAddressFL.GetEAddress:OAI/U1,OAI/U1,false,2
CustomerName: Capital System
Street: 400 Broadland Road NW
City: Atlanta
State: GA
ZIPCode: 30342
Agent: Message Processing Time = 234 ms.

```

J.D. Edwards OneWorld Event Integration

This example illustrates how the OracleAS Adapter for J.D. Edwards OneWorld integrates with J.D. Edwards OneWorld to receive event data. In this example, a JDE event occurs as a result of a sales order event in the J.D. Edwards OneWorld system. The adapter receives the J.D. Edwards OneWorld event customer data and disposes the data to an RMI event port. The RMI server resides on the OracleAS Integration InterConnect Hub. An OracleAS Database Adapter on the OracleAS Integration InterConnect Hub subscribed to this event receives the customer data, transforms the event data, and then inserts the data into a database table. The design-time and runtime configuration is described in the following section.

Design-Time Configuration

To create a DTD for a J.D. Edwards event, you must:

- Create a port in Application Explorer. See ["Creating a Port in Application Explorer"](#).


- Create a channel in Application Explorer. See "[Creating a Channel in Application Explorer](#)".
- Trigger an event from the J.D. Edwards system.
- Capture the XML event payload in the BSE log.
- Create a DTD based on the J.D. Edwards XML message using third party tools, such as XML Spy.

Creating a Port in Application Explorer

To create a port:

1. In Application Explorer, expand the **JDEdwards** node.
2. Right-click the **Ports** node, and select **Add Port**.

The Edit Port dialog box is displayed.

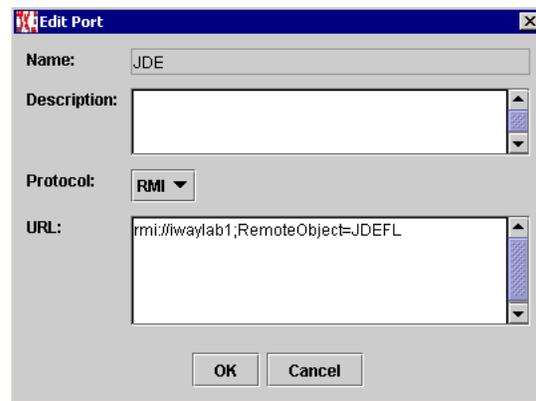

3. Enter a description in the **Description** field (optional).
4. Select **RMI** from the **Protocol** list.
5. Enter the URL for the server in the **URL** field, and click **OK**.


The port is created, and shows under the Ports node.

Creating a Channel in Application Explorer

To create a channel:


1. In Application Explorer, expand the **JDEdwards** node.
2. Right-click the **Channels** node, and select **Add Channels**.

The Add Channel dialog box is displayed.

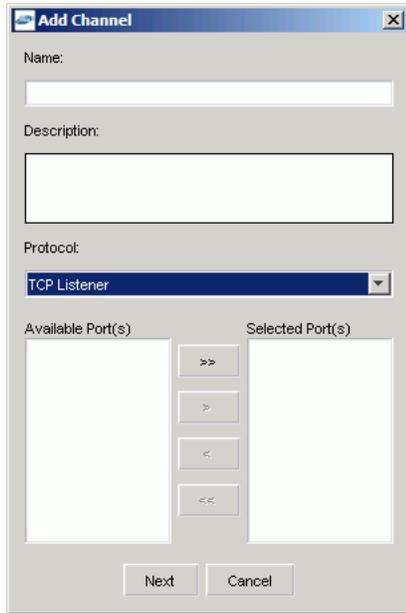


3. In the **Name** field, enter a descriptive name for the channel.
4. Enter a description in the **Description** field (optional).
5. Choose a protocol for your channel from the **Protocol** list.
6. In the Available Port(s) field, select the port or ports you wish to associate with the channel, and click the right arrow (>) button. To add all the ports, click the double right arrow button (>>).
7. Click **Next**.

The dialog box for the selected listener is displayed.

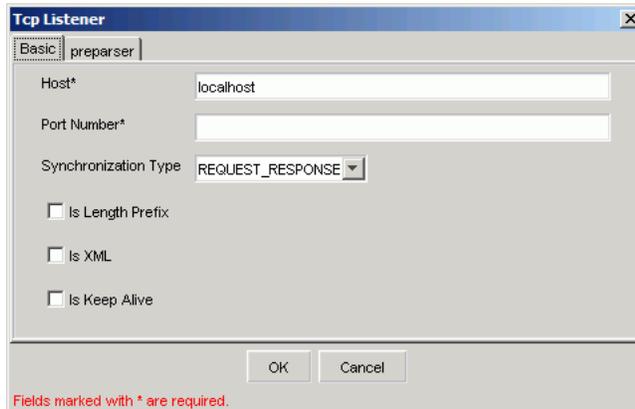

8. Enter the location of the server in the **Host** field.
9. Enter the port number of the channel in the **Port Number** field.
10. Select the Synchronization type from the **Synchronization Type** list.
11. Select **Is Length Prefix** for events that send data which is not in XML format. The TCP/IP event application must prefix the data with a 4-byte binary length field when writing the data to the TCP/IP port.
12. Select **Is XML** for events that send data back in XML format. No preparser is required.

13. Select **Is Keep Alive** to maintain a continuous communication between the event transaction and the channel.
14. Click the **preparser** tab.

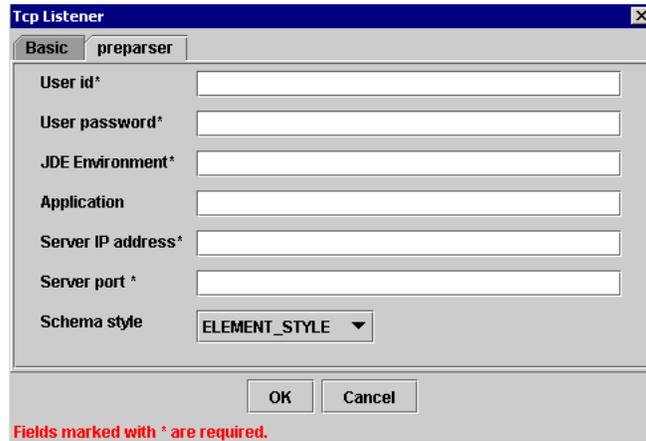

Enter values based on the following table.

Parameter	Description
User id*	A valid user ID for J.D. Edwards OneWorld.
User password*	The password associated with the user ID.
JDE environment*	The J.D. Edwards OneWorld environment, for example, DU7333. For more information about this parameter, see your J.D. Edwards OneWorld documentation or ask your OneWorld system administrator.
Application	XMLInterop or the application name in J.D. Edwards OneWorld. Optional.
Server IP address*	The name of the server on which J.D. Edwards OneWorld is running. This can be the name of the server, for example, JDEOW, or its IP address, for example, 123.45.67.89.
Server Port*	The port number on which the server is listening, for example, 6009.
Schema style	Choose a style from the list.

Click **OK**.

The channel is created and shows under the Channels node.

15. To start the channel, right-click the channel node and select **Start**.

The channel you created becomes active.

This triggers an event from the J.D. Edwards system.

For the XML event message, check the BSE log located at:

```
OracleAS_home\j2ee\home\applications\ws-app-adapter\ibse\ibselogs
```

Starting the Repository

To start the InterConnect repository, double-click the `start.bat` file located in the following directory:

```
InterConnect_home\repository\start.bat
```


Creating a Common View

To create a Common View:

1. Start iStudio.


The iStudio `start.bat` file is located in the following directory:

`InterConnect_home\istudio\iStudio.bat`

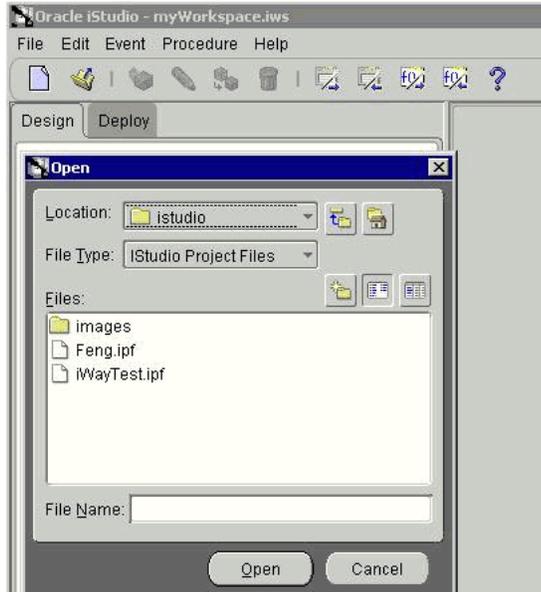


2. Open a new project.
3. Open **Common Views** and **Business Objects**.
4. Create a Business Object called **JDE** and a new event under **SalesOrder**.

The **Create Event** dialog box is displayed.

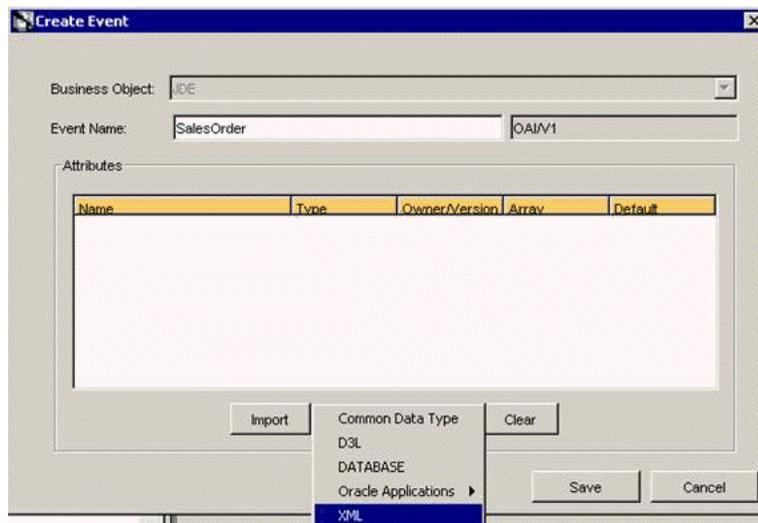


5. Click **Import**, and then select **XML** as the import type.

The **Open** dialog box is displayed.

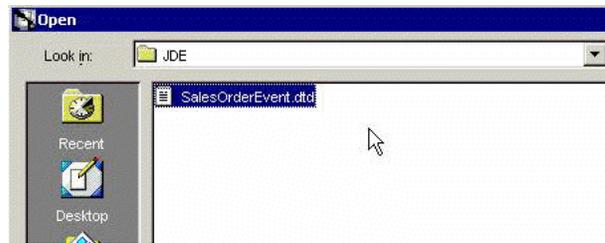


6. Select the DTD generated from Application Explorer, and click **OK**.
The Choose Root Element Dialog pane is displayed.

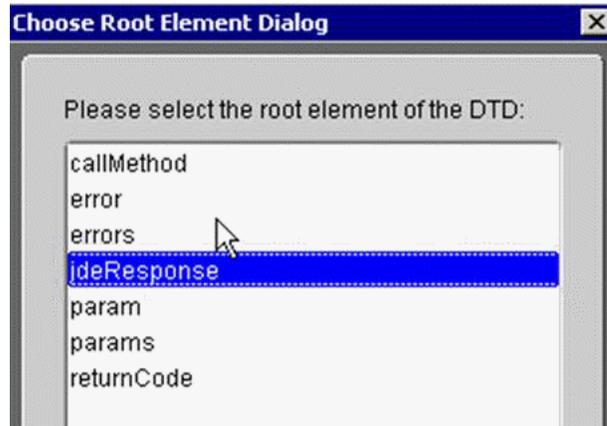


7. Choose the Root element of the importing DTD, and click **OK**.
8. Click **Save**.

Publishing an Event Using OracleAS Adapter for J.D. Edwards OneWorld

To publish an event:

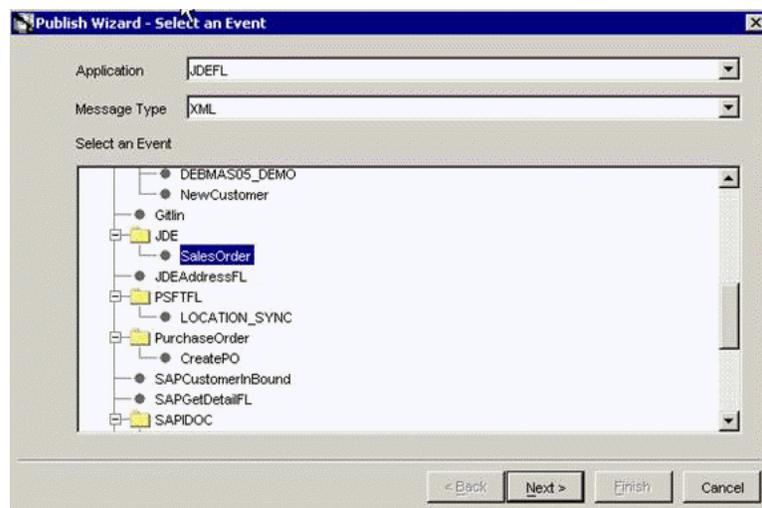


1. Create a new application named JDEFL. The application name must be uppercase.
2. Expand the new JDEFL node.
3. Right-click **Publish Events** and select **New** to create a Publish Event.
The Publish Wizard - Select an Event dialog box is displayed.

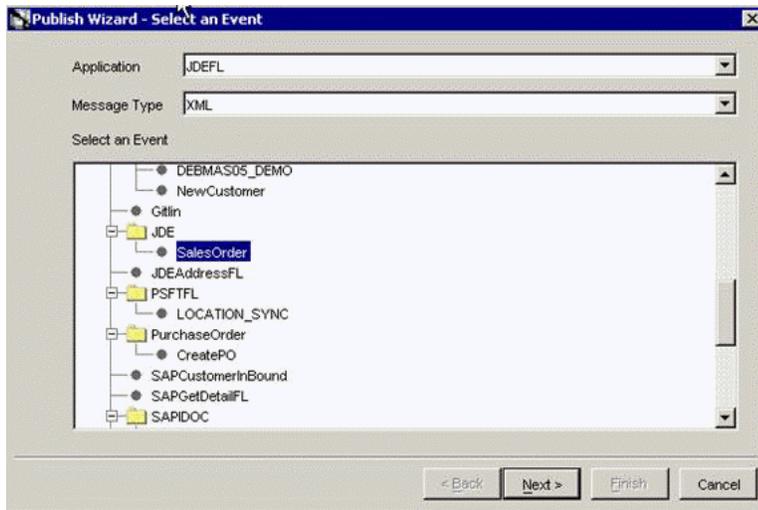

4. From the Message Type list, select **XML**.
5. In the **Select an Event** field, expand the JDE node.
6. Select **SalesOrder** as the Event.
7. Click **Next**.

The Publish Wizard - Define Application View dialog box is displayed.

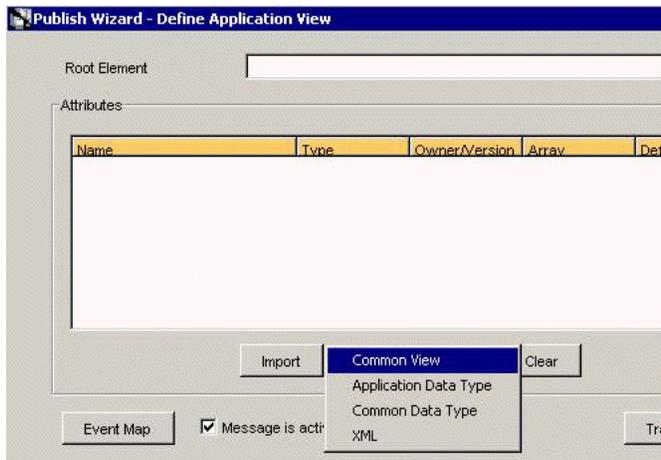

8. Click **Import**, and select **Common View**.

Note: If the application message structure is different from the Common View structure, select **XML** to load an Application-specific schema.

9. In the Root Element field, enter the root element of the XML message, `jdeResponse` in this example.
10. Click **Next**.

The Mapping Parameters dialog box is displayed.

11. Click **New** to create a mapping between the Common View and Application View. In this example, the Application and Common View have the same structure. All attributes can be mapped using the **ObjectCopy** Transformation.
12. Click **OK**.
13. Click **Finish**.

The Application definition for the Publishing Event is now complete.

Runtime Configuration

Perform the following steps:

1. Start Oracle Application Server or ensure that the server is running.


2. If necessary, restart OC4J by issuing the following command:

```
OracleAS_home\opmn\bin\opmnctl stopproc process-type=home
OracleAS_home\opmn\bin\opmnctl startproc process-type=home
```

3. Check the status of OC4J by issuing the following command:

```
OracleAS_home\opmn\bin\opmnctl status
```

4. In Application Explorer, expand the **JDEdwards** node.




5. Expand the **Channels** node.
6. Right-click the channel you wish to use, and select **Start**.
7. Start the adapter by issuing the following commands:

```
InterConnect_home\adapters\AQAPP\start.bat
InterConnect_home\adapters\JDEFL\start.bat
```


Triggering an Event in J.D. Edwards OneWorld

To trigger an event in J.D. Edwards OneWorld:

1. Log in to your J.D. Edwards OneWorld system.
2. In the **Fast Path** field of the J.D. Edwards OneWorld Explorer window, type **G4211** and press **Enter**.

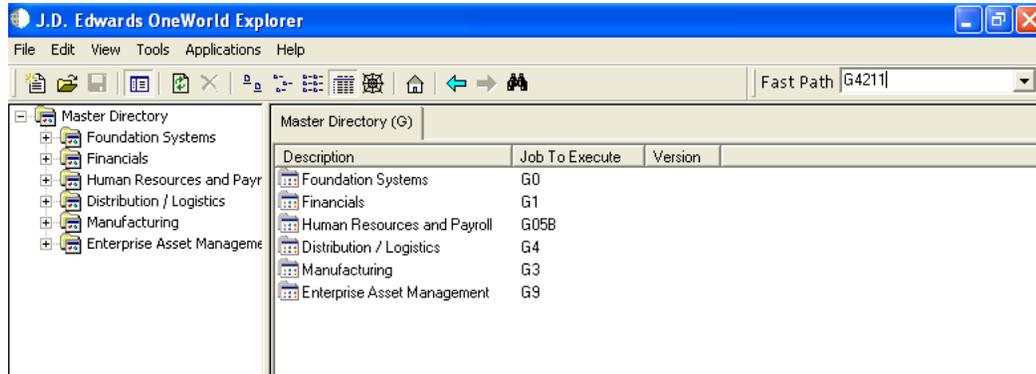


3. Right-click Sales Order Detail (P4210).

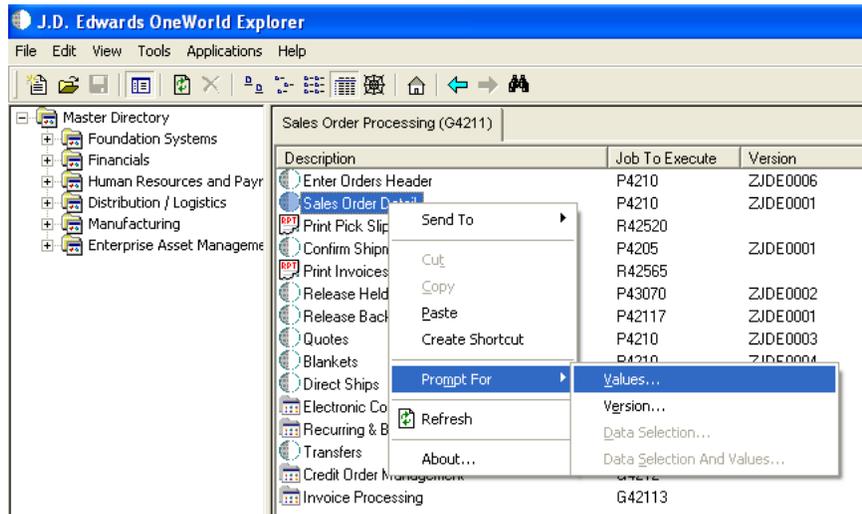

4. Select Prompt for, and then Values.


The Processing Options dialog box is displayed.

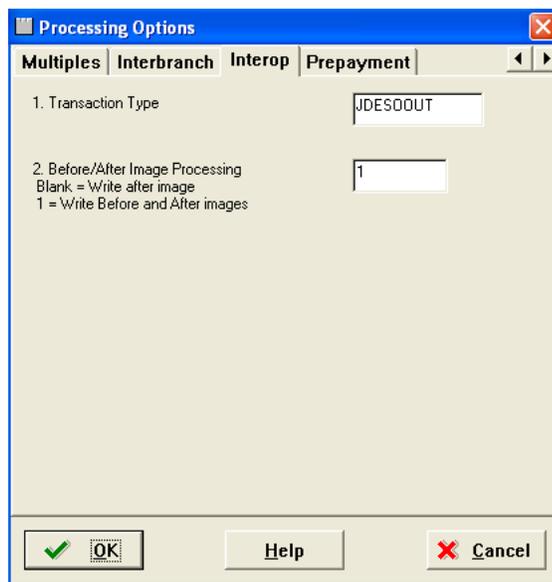

Perform the following steps:


- a. Click the **Interop** tab.
 - b. In the **Transaction Type** field, type **JDES00OUT**.
 - c. Verify that the value in the **Before/After Image Processing Blank** field is 1.
5. Click **OK**.

The **Sales Order Detail - (Customer Service Inquiry)** window is displayed.

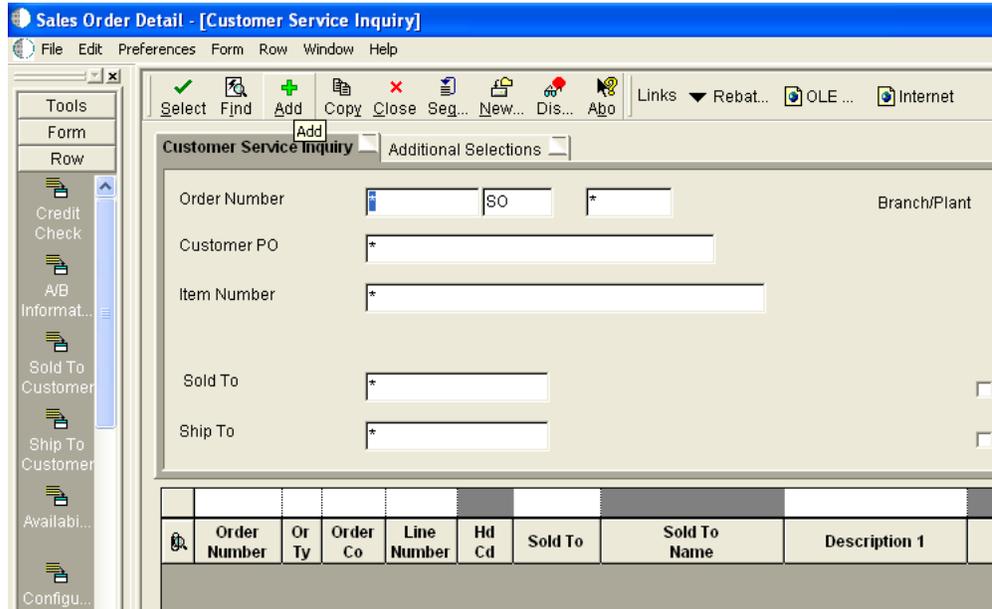

6. Click the **Add** icon (third icon from left).
7. Enter the values as shown in the following screen.

To move to a different field, use the **Tab** key on your keyboard.

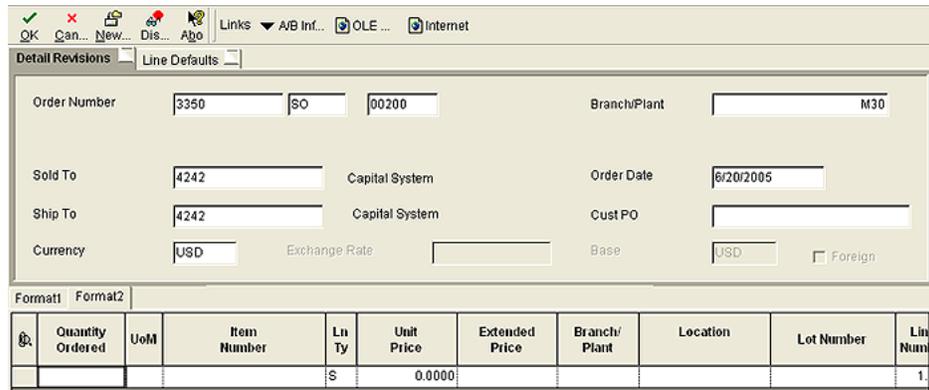

8. Enter a value for **Quantity Ordered** and **Item Number**.

For example:

Detail Revisions | Line Defaults

Order Number: 3350 | SO | 00200

Sold To: 4242 | Capital System

Ship To: 4242 | Capital System

Currency: USD | Exchange Rate:

Format1 | Format2

Q	Quantity Ordered	UoM	Item Number	Ln Ty	Unit Price	Extended Price
	1		210	S	0.0000	
				S	0.0000	

9. Click the first field in the second row and allow a few seconds for processing.

Detail Revisions | Line Defaults

Order Number: 3350 | SO | 00200

Sold To: 4242 | Capital System

Ship To: 4242 | Capital System

Currency: USD | Exchange Rate:

Format1 | Format2

Q	Quantity Ordered	UoM	Item Number	Ln Ty	Unit Price	Extended Price
	1	EA	210	S	5.0000	5.00
				S	0.0000	

10. Click OK.

Verifying Results

The following topic describes how to verify event integration using the OracleAS Adapter for J.D. Edwards OneWorld.

Publishing Adapter (JDEFL) Log File

Tue Nov 16 18:42:05 GMT-05:00 2004: The message was sent to topic(s) {oai_hub_queue=[AQAPP, DBAPP]}. Processing Time = 25,796 ms.

```
<?xml version = '1.0' encoding = 'UTF-8'?>
<!DOCTYPE MSG>
<MSG>
  <H>
    <BO>JDE</BO>
    <EN>SalesOrder</EN>
    <EV>OAI/V1</EV>
    <MV>OAI/V1</MV>
    <T>0</T>
    <SN>JDEFL</SN>
    <SA>JDEFL</SA>
```

```

<SAID>21</SAID>
<CI>JDEFL1100648500828</CI>
</H>
<B>
<AO N = "SalesOrder_CO">
  <AO N = "jdeResponse">
    <A N = "type">trans</A>
    <A N = "user">jde</A>
    <A N = "xmlns">urn:Schemas-jdedwards-com:trans.response.JDES00UT</A>
    <A N = "session">212.1100644166.9</A>
    <A N = "environment">DV7333</A>
    <AO N = "transaction">
      <A N = "type">JDES00UT</A>
      <A N = "action">transactionInfo</A>
      <AO N = "returnCode">
        <A N = "code">0</A>
        <A N = "PCDATA">XML Request OK</A>
      </AO>
      <AO N = "key">
        <AO N = "column">
          <A N = "name">EdiUserId</A>
          <A N = "PCDATA">JDE</A>
        </AO>
        <AO N = "column">
          <A N = "name">EdiBatchNumber</A>
          <A N = "PCDATA">13484</A>
        </AO>
        <AO N = "column">
          <A N = "name">EdiTransactNumber</A>
          <A N = "PCDATA">104336</A>
        </AO>
      </AO>
    </AO>
    <AO N = "table">
      <A N = "name">F4201Z1</A>
      <A N = "type">Header</A>
      <AO N = "column">
        <A N = "name">EdiUserId</A>
        <A N = "PCDATA">JDE</A>
      </AO>
      <AO N = "column">
        <A N = "name">EdiBatchNumber</A>
        <A N = "PCDATA">13484</A>
      </AO>
      <AO N = "column">
        <A N = "name">EdiTransactNumber</A>
        <A N = "PCDATA">104336</A>
      </AO>
      <AO N = "column">
        <A N = "name">EdiLineNumber</A>
        <A N = "PCDATA">1.000</A>
      </AO>
      <AO N = "column">
        <A N = "name">EdiDocumentType</A>
        <A N = "PCDATA">SO</A>
      </AO>
      <AO N = "column">
        <A N = "name">TypeTransaction</A>
        <A N = "PCDATA">JDES00UT</A>
      </AO>
      <AO N = "column">

```

```

        <A N = "name">EdiTranslationFormat</A>
...
Tue Nov 16 18:42:33 GMT-05:00 2004: AQ Adapter: received the message from the
Agent and will now write it to AQ.
Tue Nov 16 18:42:33 GMT-05:00 2004: AQ Adapter: created a writer for queue xml_
raw_q1.
Tue Nov 16 18:42:34 GMT-05:00 2004: AQ Adapter: successfully converted the OAI
message to XML
<?xml version = '1.0' encoding = 'UTF-8' standalone = 'yes'?>
<jdeResponse type="trans" user="jde"
xmlns="urn:Schemas-jdedwards-com:trans.response.JDES00UT"
session="212.1100644166.9" environment="DV7333">
  <transaction type="JDES00UT" action="transactionInfo">
    <returnCode code="0">XML Request OK</returnCode>
    <key>
      <column name="EdiUserId">JDE</column>
      <column name="EdiBatchNumber">13484</column>
      <column name="EdiTransactNumber">104336</column>
    </key>
    <table name="F4201Z1" type="Header">
      <column name="EdiUserId">JDE</column>
      <column name="EdiBatchNumber">13484</column>
      <column name="EdiTransactNumber">104336</column>
      <column name="EdiLineNumber">1.000</column>
      <column name="EdiDocumentType">SO</column>
      <column name="TypeTransaction">JDES00UT</column>
      <column name="EdiTranslationFormat"></column>
      <column name="EdiTransmissionDate"></column>
      <column name="DirectionIndicator">2</column>
      <column name="EdiDetailLinesProcess">0</column>
      <column name="EdiSuccessfullyProcess">Y</column>
      <column name="TradingPartnerId"></column>
      <column name="TransactionAction">A</column>
      <column name="CompanyKeyOrderNo">00200</column>
      <column name="DocumentOrderInvoiceE">3146</column>
      <column name="OrderType">SO</column>
      <column name="OrderSuffix">000</column>
      <column name="CostCenter">          M30</column>
      <column name="Company">00200</column>
      <column name="CompanyKeyOriginal"></column>
      <column name="OriginalPoSoNumber"></column>
      <column name="OriginalOrderType"></column>
      <column name="CompanyKeyRelated"></column>
      <column name="RelatedPoSoNumber"></column>
      <column name="RelatedOrderType"></column>
      <column name="AddressNumber">4242</column>
      <column name="AddressNumberShipTo">4242</column>
    </table>
  </transaction>
</jdeResponse>
...

```

Troubleshooting and Error Messages

This chapter explains the limitations and workarounds when connecting to J.D. Edwards OneWorld. The following topics are discussed:

- [Troubleshooting](#)
- [BSE Error Messages](#)

The adapter-specific errors listed in this chapter can arise whether using the adapter with an OracleAS Adapter J2CA or with a OracleAS Adapter Business Services Engine (BSE) configuration.

Troubleshooting

This topic provides troubleshooting information for J.D. Edwards OneWorld, separated into four categories:

- OracleAS Adapter Application Explorer (Application Explorer)
- J.D. Edwards OneWorld
- OracleAS Adapter J2CA
- BSE

Note: Log file information that can be relevant in troubleshooting can be found in the following locations:

- OracleAS Adapter J2CA trace information can be found under the *OracleAS_home\opmn\logs* directory.
 - BSE trace information can be found under the *OracleAS_home\j2ee\home\applications\ws-app-adapter\ibse\ibselogs* directory.
 - The log file for Application Explorer can be found under the *OracleAS_home\adapters\application\tools* directory.
-
-

Application Explorer

To use Application Explorer on **Windows** for debugging or testing purposes, load the batch script `ae.bat`, found under:

```
OracleAS_home\adapters\application\tools
```

On **UNIX**, load the shell script `ae.sh`, found under:

```
OracleAS_home/adapters/application/tools
```

Error	Solution
<p>Cannot connect to OracleAS Adapter for J.D. Edwards OneWorld from Application Explorer:</p> <p>Problem activating adapter. (Failed to connect to J.D.Edwards, check system availability and/or configuration parameters:...) Check logs for more information.</p>	<p>Ensure that:</p> <ul style="list-style-type: none"> ■ J.D. Edwards OneWorld is running. ■ The J.D. Edwards OneWorld user ID and password is correct. ■ The port number is correct.
<p>The following error message appears: java.lang.IllegalStateException: java.lang.Exception: Error Logon to J.D. Edwards OneWorld System</p>	<p>You have provided invalid connection information for J.D. Edwards OneWorld or the wrong JAR file is in the lib directory.</p>
<p>J.D. Edwards OneWorld does not appear in the Application Explorer Adapter node list.</p> <p>Logon failure error at runtime.</p>	<p>Ensure that the J.D. Edwards OneWorld JAR files, are added to the lib directory.</p> <p>If the password for connecting to your J.D. Edwards OneWorld system is not specified when creating a target or with the Edit option in Application Explorer, you will be unable to connect to J.D. Edwards OneWorld. The connection password is not saved in <code>repository.xml</code>. Update the password using the Edit option in Application Explorer, then restart the application server.</p>
<p>The following exception occurs when you start Application Explorer by activating <code>ae.bat</code> (not <code>iaexplorer.exe</code>):</p> <pre>java.lang.ClassNotFoundException: org.bouncycastle.jce.provider.BouncycastleProvider</pre>	<p>This is a benign exception. It does not affect adapter functionality. Download BouncyCastle files from:</p> <p>ftp://ftp.bouncycastle.org/pub</p>
<p>Unable to start Application Explorer in a Solaris environment. The following exception is thrown in the console:</p> <pre>javax.resource.ResourceException: IWAFManagedConnectionFactory: License violation at com.ibi.afjca.spi.IWAFManagedConne ctionFactory.createConnectionFacto ry(IWAFManagedConnectionFactory.ja va:98) at com.iwaysoftware.iwae.common.JCATr ansport.getConnectionFactory(JCATr ansport.java:133) at com.iwaysoftware.iwae.common.JCATr ansport.initJCA(JCATransport.java: 69) at com.iwaysoftware.iwae.common.JCATr ansport.<init>(JCATransport.java:6 2) at com.iwaysoftware.iwae.common.Adapt erClient.<init>(AdapterClient.java :85) at com.ibi.bse.ConfigWorker.run(Config Worker.java:41) at java.lang.Thread.run(Thread.java:5 34)</pre> <p>Could not create the connection factory.</p>	<p>JAVACMD is not set on the user system. Before starting Application Explorer, export JAVACMD as follows:</p> <p>JAVACMD=/<code><jdk_home></code>/bin/java, where <code><jdk_home></code> is the directory where JDK is installed on your machine.</p>

J.D. Edwards OneWorld

Error	Cause	Solution
Action code invalid	In the Sales Order request, the Action code appears as "H," an invalid action code.	Use: <ul style="list-style-type: none"> ■ "I" for inquiry. ■ "C" for change. ■ "D" for delete. ■ "A" to add a new record.
Invalid address number.	The address number does not exist in the Address Book Master file (F0101).	Enter an address number using the Address Book Revisions program (PO1051). Ensure that the number entered is correct.
Record invalid	The record being processed either already exists for an ADD function or does not exist for an INQUIRY, CHANGE, or DELETE function.	If you are attempting to inquire, change, or delete a record you added previously, there could be database problems in your production library. Contact your data processing department.
Item Branch record does not exist.	An Item Branch record (F4102) does not exist for this item in the Branch/Plant specified.	Correct the Branch or enter an Item Branch record for this item in Branch Plant Item Information (P41026).
&1 does not match any of the valid values.	The &1 does not match any of the valid values specified in the Data Dictionary for this field.	Enter a valid value.
Date out of range.	The Last Service Date and the Inspection Date must be within the range of the effective dates of the Service Contract.	Change the date to be greater than or equal to the beginning effective date and less than or equal to the ending effective date of the Service Contract.
Jde.net timeout exception	Net timeout is set to a wrong value	Verify that net timeout is set to 180 at <code>jde.ini</code> of [NETWORK QUEUE SETTINGS], for example <code>JDENETTimeout=180</code>
Cannot connect to EnterpriseOne Version 8.10	Missing required library files	<code>Kernel.jar</code> and <code>Connector.jar</code> are required for version B7333. <code>jdeutil.jar</code> and <code>log4j.jar</code> are required for EnterpriseOne Version 8.10, in addition to <code>Kernel.jar</code> and <code>Connector.jar</code> .

OracleAS Adapter J2CA

Error	Solution
In Application Explorer, the following error message appears when you attempt to connect to an OracleAS Adapter J2CA configuration: Could not initialize JCA	In the Details tab in the right pane, ensure that the directory specified in the Home field points to the correct directory, for example, <code>OracleAS_home\adapters\application</code>

BPEL Process Manager

Error	Solution
Endpoint activation error on deployment of J.D. Edwards event handling project (inbound) in JDeveloper	Verify that the channel used for this inbound J2CA service is stopped in Application Explorer. If you have started this channel for testing or debugging purposes, you must stop it before starting BPEL PM Server. Endpoint activation is managed by BPEL Process Manager.
The following error message appears in BPEL PM Server Console: Process "TestJDE" (revision "1.0") compilation failed. <2005-05-18 10:49:53,285> <ERROR><default.collaxa.cube.engine.deployment> <Cube ProcessLoader::create> Failed to read wsdl. Error happened when reading wsdl at "http://127.0.0.1:7777/BPELConsole/wsdl/adapters/applications/GetEffectiveAddress_invoke.wsdl?wsdl", because "WSDLException: faultCode=INVALID_WSDL: Invalid XML in document at: http://127.0.0.1:7777/BPELConsole/wsdl/adapters/applications/GetEffectiveAddress_invoke.wsdl?wsdl: The element type "P" must be terminated by the matching end-tag "</P>".	Verify that the specified WSDL file exists at that URL and that the file is valid. Workaround: Change the WSDL location to localhost:7777. The default is 127.0.0.1:7777. Alternative workaround: Add the IP address to the Dhttp.nonProxyHosts list found in obsetenv.bat (Windows) or obsetenv.sh (Unix)
Second message invocation fails at runtime.	Verify that you have all the required patches installed. The required patches are listed and updated on the Oracle Technology Network Web site at http://www.oracle.com/technology/index.html
The following exception is thrown in JDeveloper during deployment of the BPEL process: java.io.FileNotFoundException: \BPELConsole\wsil\adapters\applications\SalesOrder_receive.wsdl?wsdl (The system cannot find the path specified)	Verify that you have all the required patches installed. The required patches are listed and updated on the Oracle Technology Network Web site at http://www.oracle.com/technology/index.html

BSE Error Messages

This topic discusses the different types of errors that can occur when processing Web services through BSE.

General Error Handling in BSE

BSE serves as both a SOAP gateway into the adapter framework and as the engine for some of the adapters. In both design time and runtime, various conditions can cause errors in BSE when Web services that use adapters are running. Some of these conditions and resulting errors are exposed the same way, regardless of the specific

adapter; others are exposed differently, based on the adapter being used. This topic explains what you can expect when you encounter some of the more common error conditions on an adapter-specific basis. Usually the SOAP gateway (agent) inside BSE passes a SOAP request message to the adapter required for the Web service. If an error occurs, how it is exposed depends on the adapter and the API or interfaces that the adapter uses. A few scenarios cause the SOAP gateway to generate a SOAP fault. In general, anytime the SOAP agent inside BSE receives an invalid SOAP request, a SOAP fault element is generated in the SOAP response. The SOAP fault element contains fault string and fault code elements. The fault code contains a description of the SOAP agent error. The following SOAP response document results when BSE receives an invalid SOAP request:

```
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/">
  <SOAP-ENV:Body>
    <SOAP-ENV:Fault>
      <faultcode>SOAP-ENV:Client</faultcode>
      <faultstring>Parameter node is missing</faultstring>
    </SOAP-ENV:Fault>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

In this example, BSE did not receive an element in the SOAP request message that is mandatory for the WSDL for this Web service.

Adapter-Specific Error Handling

When an adapter raises an exception during runtime, the SOAP agent in BSE produces a SOAP fault element in the generated SOAP response. The SOAP fault element contains fault code and fault string elements. The fault string contains the native error description from the adapter target system. Since adapters use the target system interfaces and APIs, whether or not an exception is raised depends on how the target systems interface or API treats the error condition. If a SOAP request message is passed to an adapter by the SOAP agent in BSE, and that request is invalid based on the WSDL for that service, the adapter may raise an exception yielding a SOAP fault.

While it is almost impossible to anticipate every error condition that an adapter may encounter, the following is a description of how adapters handle common error conditions and how they are then exposed to the Web services consumer application.

Invalid SOAP Request

If Oracle Application Server Adapter receives a SOAP request message that does not conform to the WSDL for the Web services being executed, then the following SOAP response is generated.

```
<?xml version="1.0" encoding="ISO-8859-1"
?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/">
<SOAP-ENV:Body>
  <SOAP-ENV:Fault>
    <faultcode>SOAP-ENV:Server</faultcode>
    <faultstring>RPC server connection failed: Connection refused:
connect</faultstring>
  </SOAP-ENV:Fault>
</SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

Empty Result From Oracle Application Server Adapter Request

If Oracle Application Server Adapter executes a SOAP request using input parameters passed that do not match records in the target system, then the following SOAP response is generated.

Note: The condition for this adapter does not yield a SOAP fault.

```
<SOAP-ENV:Envelope xmlns:xsi="http://www.w3.org/1999/XMLSchema-instance"
xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsd="http://www.w3.org/1999/XMLSchema">
  <SOAP-ENV:Body>
    <m:RunDBQueryResponse xmlns:m="urn:schemas-iwaysoftware-com:iwse"
xmlns="urn:schemas-iwaysoftware-com:iwse"
cid="2A3CB42703EB20203F91951B89F3C5AF">
      <RunDBQueryResult run="1" />
    </m:RunDBQueryResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

Error Logging In

If Oracle Application Server Adapter executes an invalid SOAP log in request, then the following SOAP response is generated.

```
[2004-07-19T16:28:56:718Z] DEBUG (SOAP1) W.SOAP1.2: POST received
[2004-07-19T16:28:56:718Z] DEBUG (SOAP1) W.SOAP1.2: in XDSOAPHTTPWorker agentName
is [XDSOAPRouter]
[2004-07-19T16:28:56:718Z] DEBUG (SOAP1) W.SOAP1.2: before parse:
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:SOAP-ENC="http://schemas.xmlsoap.org/soap/encoding/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
<SOAP-ENV:Header>
<m:ibsinfo xmlns:m="urn:schemas-iwaysoftware-...[861]
[2004-07-19T16:28:56:718Z] ERROR (SOAP1) W.SOAP1.2: Attempting string, no encoding
recognized in document
[2004-07-19T16:28:56:734Z] DEEP (SOAP1) W.SOAP1.2: parse complete in 16 msecs
[2004-07-19T16:28:56:859Z] DEEP (SOAP1) W.SOAP1.2: ST_NODICT
[2004-07-19T16:28:56:859Z] DEEP (SOAP1) W.SOAP1.2: ST_FINISH
[2004-07-19T16:28:56:859Z] DEBUG (SOAP1) extractControl - edaDoc: false
[2004-07-19T16:28:56:859Z] DEBUG (SOAP1) now: 2004-07-19T16:28:56Z expires:
2004-07-20T16:28:56Z
[2004-07-19T16:28:56:859Z] DEBUG (SOAP1) W.SOAP1.2: checking for cached agent
[2004-07-19T16:28:56:859Z] DEBUG (SOAP1) W.SOAP1.2: pushagent: adding agent
com.ibi.iwse.XDSOAPRouter
[2004-07-19T16:28:56:875Z] DEBUG (SOAP1) W.SOAP1.2: inside worker the soap Action
is [B0100033.GetEffectiveAddressRequest#test##]
[2004-07-19T16:28:56:875Z] DEBUG (SOAP1) W.SOAP1.2: precedence: 1
[2004-07-19T16:28:56:875Z] DEBUG (SOAP1) W.SOAP1.2: precedence: 1
[2004-07-19T16:28:56:875Z] DEBUG (SOAP1) W.SOAP1.2: numagents: 1
[2004-07-19T16:28:56:890Z] DEBUG (SOAP1) W.SOAP1.2: running agent 1 name
com.ibi.iwse.XDSOAPRouter document 1
[2004-07-19T16:28:56:890Z] INFO (manager) MGR00X01: Adding active worker:
W.SOAP1.2
[2004-07-19T16:28:56:890Z] DEBUG (SOAP1) W.SOAP1.2: <?xml version="1.0"
encoding="UTF-8" ?>
<SOAP-ENV:Envelope xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:SOAP-ENC="http://schemas.xmlsoap.org/soap/encoding/"
```

```

xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <SOAP-ENV:Header>
    <m:ibsinfo xmlns:m="urn:schemas-iwaysoftware-com:iwse">
      <m:service>B0100033</m:service>
      <m:method>GetEffectiveAddress</m:method>
      <m:license>test</m:license>
      <m:Username>user</m:Username>
      <m>Password>password</m>Password>
    </m:ibsinfo>
  </SOAP-ENV:Header>
  <SOAP-ENV:Body>
    <m:GetEffectiveAddress
xmlns:m="urn:iwaysoftware:ibse:jul2003:GetEffectiveAddress">
      <m:jdeRequest type="callmethod">
        <m:callMethod name="GetEffectiveAddress">
          <m:params>
            <m:param name="mnAddressNumber">12345</m:param>
          </m:params>
          <m:onError/>
        </m:callMethod>
      </m:jdeRequest>
    </m:GetEffectiveAddress>
  </SOAP-ENV:Body>
  <SOAPAction agentName="XDSOAPRouter"
cid="1FF3D44E0B0AFB2A4E9538ED42B71437">B0100033.GetEffectiveAddressRequest#test##<
/SOAPAction>
</SOAP-ENV:Envelope>
[2004-07-19T16:28:56:890Z] DEBUG (SOAP1) W.SOAP1.2: business method:
m:GetEffectiveAddress
[2004-07-19T16:28:56:906Z] DEBUG (SOAP1) W.SOAP1.2: input:
[2004-07-19T16:28:56:906Z] DEBUG (SOAP1) W.SOAP1.2: <?xml version="1.0"
encoding="UTF-8" ?><jdeRequest xmlns:xsd="http://www.w3.org/2001/XMLSchema"
type="callmethod" xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:SOAP-ENC="http://schemas.xmlsoap.org/soap/encoding/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"><callMethod
name="GetEffectiveAddress"><params><param name="mnAddressNumber">12345</param>
</params><onError/></callMethod></jdeRequest>
[2004-07-19T16:28:58:234Z] DEBUG (SOAP1) W.SOAP1.2: Agent returned success
[2004-07-19T16:28:58:234Z] INFO (manager) MGR00X02: Removing active worker:
W.SOAP1.2
[2004-07-19T16:28:58:234Z] DEBUG (SOAP1) W.SOAP1.2: doing docTran, docVal,
listTran for agent(1)
[2004-07-19T16:28:58:250Z] DEBUG (SOAP1) W.SOAP1.2: sendToAll reply to XDReply:
[protocol=http */null]
[2004-07-19T16:28:58:250Z] DEBUG (SOAP1) W.SOAP1.2: preemitters from doc: null
[2004-07-19T16:28:58:250Z] DEBUG (SOAP1) W.SOAP1.2: no preemitters, emitting
contents of doc, usestream=false encoding=UTF-8
[2004-07-19T16:28:58:250Z] DEBUG (SOAP1) W.SOAP1.2: writeEntity, len: 670 data:
<?xml version="1.0" encoding="UTF-8" ?><SOAP-ENV:Envelope
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"><SOAP-ENV:Body><GetEffective
AddressResponse xmlns="urn:iwaysoftware:ibse:jul2003:GetEffectiveAddress:response"
cid="1FF3D44E0B0AFB2A4E9538ED42B71437"><jdeResponse user="USER" type="callmethod"
session="" environment="DV7333"><returnCode code="12">Environment
&apos;DV7333&apos; could not be initialized for user, check user, pwd and
environment attribute
values</returnCode></jdeResponse></GetEffectiveAddressResponse></SOAP-ENV:Body></S
OAP-ENV:Envelope>
[2004-07-19T16:28:58:250Z] DEBUG (SOAP1) W.SOAP1.2: writeString: HTTP/1.0

```

```

[2004-07-19T16:28:58:250Z] DEBUG (SOAP1) W.SOAP1.2: writeString: 200
[2004-07-19T16:28:58:250Z] DEBUG (SOAP1) W.SOAP1.2: writeString: OK
[2004-07-19T16:28:58:250Z] DEBUG (SOAP1) W.SOAP1.2: writeString: Content-Type:
[2004-07-19T16:28:58:250Z] DEBUG (SOAP1) W.SOAP1.2: writeString: text/xml
[2004-07-19T16:28:58:250Z] DEBUG (SOAP1) W.SOAP1.2: writeString: Content-Length:
[2004-07-19T16:28:58:265Z] DEBUG (SOAP1) W.SOAP1.2: writeString: 670
[2004-07-19T16:28:58:265Z] INFO (SOAP1) W.SOAP1.2: W0000X13: Ended message
processing, rc=0
[2004-07-19T16:28:58:265Z] DEEP (SOAP1) W.SOAP1.2: storing used socket
[2004-07-19T16:28:58:265Z] DEBUG (SOAP1) W.SOAP1.2: entering waitForDocument
[2004-07-19T16:29:03:875Z] DEEP (SOAP1) W.SOAP1.2: cleanup: closing sockets(0)

```

Empty Result From Oracle Application Server Adapter Request

If Oracle Application Server Adapter executes a SOAP request using input parameters passed that do not match records in the target system, then the following SOAP response is generated.

Note: The condition for this adapter does not yield a SOAP fault.

```

[2004-07-19T16:27:05:640Z] DEBUG (SOAP1) W.SOAP1.2: POST received
[2004-07-19T16:27:05:640Z] DEBUG (SOAP1) W.SOAP1.2: in XDSOAPHTTPWorker agentName
is [XDSOAPRouter]
[2004-07-19T16:27:05:640Z] DEBUG (SOAP1) W.SOAP1.2: before parse:
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:SOAP-ENC="http://schemas.xmlsoap.org/soap/encoding/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
<SOAP-ENV:Body>
<m:GetEffectiveAddress xmlns:m="urn:iwaysoftwar...[590]
[2004-07-19T16:27:05:640Z] ERROR (SOAP1) W.SOAP1.2: Attempting string, no encoding
recognized in document
[2004-07-19T16:27:05:640Z] DEEP (SOAP1) W.SOAP1.2: parse complete in 0 msec
[2004-07-19T16:27:05:781Z] DEEP (SOAP1) W.SOAP1.2: ST_NODICT
[2004-07-19T16:27:05:781Z] DEEP (SOAP1) W.SOAP1.2: ST_FINISH
[2004-07-19T16:27:05:781Z] DEBUG (SOAP1) extractControl - edaDoc: false
[2004-07-19T16:27:05:781Z] DEBUG (SOAP1) now: 2004-07-19T16:27:05Z expires:
2004-07-20T16:27:05Z
[2004-07-19T16:27:05:781Z] DEBUG (SOAP1) W.SOAP1.2: inside isAsync() the soap
Action is ["B0100033.GetEffectiveAddressRequest#test##"]
[2004-07-19T16:27:05:781Z] DEBUG (SOAP1) W.SOAP1.2: inside isAsync() the soap
Action is [B0100033.GetEffectiveAddressRequest#test##]
[2004-07-19T16:27:05:781Z] DEBUG (SOAP1) W.SOAP1.2: checking for cached agent
[2004-07-19T16:27:05:796Z] DEBUG (SOAP1) W.SOAP1.2: pushagent: adding agent
com.ibi.iwse.XDSOAPRouter
[2004-07-19T16:27:05:796Z] DEBUG (SOAP1) W.SOAP1.2: inside worker the soap Action
is [B0100033.GetEffectiveAddressRequest#test##]
[2004-07-19T16:27:05:796Z] DEBUG (SOAP1) W.SOAP1.2: precedence: 1
[2004-07-19T16:27:05:796Z] DEBUG (SOAP1) W.SOAP1.2: precedence: 1
[2004-07-19T16:27:05:796Z] DEBUG (SOAP1) W.SOAP1.2: numagents: 1
[2004-07-19T16:27:05:812Z] DEBUG (SOAP1) W.SOAP1.2: running agent 1 name
com.ibi.iwse.XDSOAPRouter document 1
[2004-07-19T16:27:05:812Z] INFO (manager) MGR00X01: Adding active worker:
W.SOAP1.2
[2004-07-19T16:27:05:812Z] DEBUG (SOAP1) W.SOAP1.2: <?xml version="1.0"
encoding="UTF-8" ?>
<SOAP-ENV:Envelope xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:SOAP-ENC="http://schemas.xmlsoap.org/soap/encoding/"

```

```

xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <SOAP-ENV:Body>
    <m:GetEffectiveAddress
xmlns:m="urn:iwaysoftware:ibse:jul2003:GetEffectiveAddress">
      <m:jdeRequest type="callmethod">
        <m:callMethod name="GetEffectiveAddress">
          <m:params>
            <m:param name="mnAddressNumber">12345</m:param>
          </m:params>
          <m:onError/>
        </m:callMethod>
      </m:jdeRequest>
    </m:GetEffectiveAddress>
  </SOAP-ENV:Body>
  <SOAPAction agentName="XDSOAPRouter"
cid="9F71FEA4C932CD8786F7388D7EF293A1">B0100033.GetEffectiveAddressRequest#test##<
/soapAction>
</SOAP-ENV:Envelope>
[2004-07-19T16:27:05:812Z] DEBUG (SOAP1) W.SOAP1.2: business method:
m:GetEffectiveAddress
[2004-07-19T16:27:05:828Z] DEBUG (SOAP1) W.SOAP1.2: input:
[2004-07-19T16:27:05:828Z] DEBUG (SOAP1) W.SOAP1.2: <?xml version="1.0"
encoding="UTF-8" ?><jdeRequest xmlns:xsd="http://www.w3.org/2001/XMLSchema"
type="callmethod" xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:SOAP-ENC="http://schemas.xmlsoap.org/soap/encoding/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"><callMethod
name="GetEffectiveAddress"><params><param name="mnAddressNumber">12345</param>
</params><onError/></callMethod></jdeRequest>
[2004-07-19T16:27:07:843Z] DEBUG (SOAP1) W.SOAP1.2: Agent returned success
[2004-07-19T16:27:07:843Z] INFO (manager) MGR00X02: Removing active worker:
W.SOAP1.2
[2004-07-19T16:27:07:843Z] DEBUG (SOAP1) W.SOAP1.2: doing docTran, docVal,
listTran for agent(1)
[2004-07-19T16:27:07:859Z] DEBUG (SOAP1) W.SOAP1.2: sendToAll reply to XDReply:
[protocol=http */null]
[2004-07-19T16:27:07:859Z] DEBUG (SOAP1) W.SOAP1.2: preemitters from doc: null
[2004-07-19T16:27:07:859Z] DEBUG (SOAP1) W.SOAP1.2: no preemitters, emitting
contents of doc, usestream=false encoding=UTF-8
[2004-07-19T16:27:07:859Z] DEBUG (SOAP1) W.SOAP1.2: writeEntity, len: 643 data:
<?xml version="1.0" encoding="UTF-8" ?><SOAP-ENV:Envelope
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"><SOAP-ENV:Body><GetEffective
AddressResponse xmlns="urn:iwaysoftware:ibse:jul2003:GetEffectiveAddress:response"
cid="9F71FEA4C932CD8786F7388D7EF293A1"><jdeResponse user="JDE" type="callmethod"
environment="DV7333"><callMethod name="GetEffectiveAddress"><returnCode code="2"/>
<params><param
name="mnAddressNumber">12345</param></params></callMethod></jdeResponse></GetEffec
tiveAddressResponse></SOAP-ENV:Body></SOAP-ENV:Envelope>
[2004-07-19T16:27:07:859Z] DEBUG (SOAP1) W.SOAP1.2: writeString: HTTP/1.0
[2004-07-19T16:27:07:859Z] DEBUG (SOAP1) W.SOAP1.2: writeString: 200
[2004-07-19T16:27:07:859Z] DEBUG (SOAP1) W.SOAP1.2: writeString: OK
[2004-07-19T16:27:07:859Z] DEBUG (SOAP1) W.SOAP1.2: writeString: Content-Type:
[2004-07-19T16:27:07:859Z] DEBUG (SOAP1) W.SOAP1.2: writeString: text/xml
[2004-07-19T16:27:07:875Z] DEBUG (SOAP1) W.SOAP1.2: writeString: Content-Length:
[2004-07-19T16:27:07:875Z] DEBUG (SOAP1) W.SOAP1.2: writeString: 643
[2004-07-19T16:27:07:875Z] INFO (SOAP1) W.SOAP1.2: W0000X13: Ended message
processing, rc=0
[2004-07-19T16:27:07:875Z] DEEP (SOAP1) W.SOAP1.2: storing used socket
[2004-07-19T16:27:07:875Z] DEBUG (SOAP1) W.SOAP1.2: entering waitForDocument

```

[2004-07-19T16:27:12:781Z] DEEP (SOAP1) W.SOAP1.2: cleanup: closing sockets(0)

Invalid Call Method

If an invalid call is made to Oracle Application Server Adapter, then the following SOAP response is generated.

```
[2004-07-19T16:24:34:859Z] DEBUG (SOAP1) W.SOAP1.2: POST received
[2004-07-19T16:24:34:859Z] DEBUG (SOAP1) W.SOAP1.2: in XDSOAPHTTPWorker agentName
is [XDSOAPRouter]
[2004-07-19T16:24:34:859Z] DEBUG (SOAP1) W.SOAP1.2: before parse:
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:SOAP-ENC="http://schemas.xmlsoap.org/soap/encoding/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
<SOAP-ENV:Body>
<m:GetEffectiveAddress xmlns:m="urn:iwaysoftwar... [581]
[2004-07-19T16:24:34:859Z] ERROR (SOAP1) W.SOAP1.2: Attempting string, no encoding
recognized in document
[2004-07-19T16:24:34:859Z] DEEP (SOAP1) W.SOAP1.2: parse complete in 0 msec
[2004-07-19T16:24:34:875Z] DEEP (SOAP1) W.SOAP1.2: ST_NODICT
[2004-07-19T16:24:34:875Z] DEEP (SOAP1) W.SOAP1.2: ST_FINISH
[2004-07-19T16:24:34:875Z] DEBUG (SOAP1) extractControl - edaDoc: false
[2004-07-19T16:24:34:875Z] DEBUG (SOAP1) now: 2004-07-19T16:24:34Z expires:
2004-07-20T16:24:34Z
[2004-07-19T16:24:34:875Z] DEBUG (SOAP1) W.SOAP1.2: inside isAsync() the soap
Action is ["B0100033.GetEffectiveAddressRequest#test##"]
[2004-07-19T16:24:34:875Z] DEBUG (SOAP1) W.SOAP1.2: inside isAsync() the soap
Action is [B0100033.GetEffectiveAddressRequest#test##]
[2004-07-19T16:24:34:875Z] DEBUG (SOAP1) W.SOAP1.2: checking for cached agent
[2004-07-19T16:24:34:875Z] DEBUG (SOAP1) W.SOAP1.2: pushagent: adding agent
com.ibi.iwse.XDSOAPRouter
[2004-07-19T16:24:34:875Z] DEBUG (SOAP1) W.SOAP1.2: inside worker the soap Action
is [B0100033.GetEffectiveAddressRequest#test##]
[2004-07-19T16:24:34:890Z] DEBUG (SOAP1) W.SOAP1.2: precedence: 1
[2004-07-19T16:24:34:890Z] DEBUG (SOAP1) W.SOAP1.2: precedence: 1
[2004-07-19T16:24:34:890Z] DEBUG (SOAP1) W.SOAP1.2: numagents: 1
[2004-07-19T16:24:34:890Z] DEBUG (SOAP1) W.SOAP1.2: running agent 1 name
com.ibi.iwse.XDSOAPRouter document 1
[2004-07-19T16:24:35:031Z] INFO (manager) MGR00X01: Adding active worker:
W.SOAP1.2
[2004-07-19T16:24:35:031Z] DEBUG (SOAP1) W.SOAP1.2: <?xml version="1.0"
encoding="UTF-8" ?>
<SOAP-ENV:Envelope xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:SOAP-ENC="http://schemas.xmlsoap.org/soap/encoding/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <SOAP-ENV:Body>
    <m:GetEffectiveAddress
xmlns:m="urn:iwaysoftware:ibse:jul2003:GetEffectiveAddress">
      <m:jdeRequest type="callmethod">
        <m:callMethod name="GetAddress">
          <m:params>
            <m:param name="mnAddressNumber">34518</m:param>
          </m:params>
          <m:onError/>
        </m:callMethod>
      </m:jdeRequest>
    </m:GetEffectiveAddress>
  </SOAP-ENV:Body>
</SOAPAction agentName="XDSOAPRouter">
```

```
cid="4C0AD8398CB7A5B4DED18057D963AA44">B0100033.GetEffectiveAddressRequest#test##<
/SOAPAction>
</SOAP-ENV:Envelope>
[2004-07-19T16:24:35:031Z] DEBUG (SOAP1) W.SOAP1.2: business method:
m:GetEffectiveAddress
[2004-07-19T16:24:35:031Z] DEBUG (SOAP1) W.SOAP1.2: input:
[2004-07-19T16:24:35:031Z] DEBUG (SOAP1) W.SOAP1.2: <?xml version="1.0"
encoding="UTF-8" ?><jdeRequest xmlns:xsd="http://www.w3.org/2001/XMLSchema"
type="callmethod" xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:SOAP-ENC="http://schemas.xmlsoap.org/soap/encoding/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"><callMethod
name="GetAddress"><params><param name="mnAddressNumber">34518</param>
</params><onError/></callMethod></jdeRequest>
[2004-07-19T16:24:36:781Z] DEBUG (SOAP1) W.SOAP1.2: Agent returned success
[2004-07-19T16:24:36:781Z] INFO (manager) MGR00X02: Removing active worker:
W.SOAP1.2
[2004-07-19T16:24:36:781Z] DEBUG (SOAP1) W.SOAP1.2: doing docTran, docVal,
listTran for agent(1)
[2004-07-19T16:24:36:781Z] DEBUG (SOAP1) W.SOAP1.2: sendToAll reply to XDReply:
[protocol=http */null]
[2004-07-19T16:24:36:781Z] DEBUG (SOAP1) W.SOAP1.2: preemitters from doc: null
[2004-07-19T16:24:36:781Z] DEBUG (SOAP1) W.SOAP1.2: no preemitters, emitting
contents of doc, usestream=false encoding=UTF-8
[2004-07-19T16:24:36:781Z] DEBUG (SOAP1) W.SOAP1.2: writeEntity, len: 595 data:
<?xml version="1.0" encoding="UTF-8" ?><SOAP-ENV:Envelope
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"><SOAP-ENV:Body><GetEffective
AddressResponse xmlns="urn:iwaysoftware:ibse:jul2003:GetEffectiveAddress:response"
cid="4C0AD8398CB7A5B4DED18057D963AA44"><jdeResponse user="JDE" type="callmethod"
environment="DV7333"><callMethod name="GetAddress"><returnCode code="99"/><params>
</params></callMethod></jdeResponse></GetEffectiveAddressResponse></SOAP-ENV:Body>
</SOAP-ENV:Envelope>
[2004-07-19T16:24:36:796Z] DEBUG (SOAP1) W.SOAP1.2: writeString: HTTP/1.0
[2004-07-19T16:24:36:796Z] DEBUG (SOAP1) W.SOAP1.2: writeString: 200
[2004-07-19T16:24:36:796Z] DEBUG (SOAP1) W.SOAP1.2: writeString: OK
[2004-07-19T16:24:36:796Z] DEBUG (SOAP1) W.SOAP1.2: writeString: Content-Type:
[2004-07-19T16:24:36:796Z] DEBUG (SOAP1) W.SOAP1.2: writeString: text/xml
[2004-07-19T16:24:36:796Z] DEBUG (SOAP1) W.SOAP1.2: writeString: Content-Length:
[2004-07-19T16:24:36:796Z] DEBUG (SOAP1) W.SOAP1.2: writeString: 595
[2004-07-19T16:24:36:796Z] INFO (SOAP1) W.SOAP1.2: W0000X13: Ended message
processing, rc=0
[2004-07-19T16:24:36:796Z] DEEP (SOAP1) W.SOAP1.2: storing used socket
[2004-07-19T16:24:36:812Z] DEBUG (SOAP1) W.SOAP1.2: entering waitForDocument
[2004-07-19T16:24:42:671Z] DEEP (SOAP1) W.SOAP1.2: cleanup: closing sockets(0)
```

Advanced User Tools

This chapter includes the following topics:

- [Web Services Policy-Based Security](#)
- [Migrating Repositories](#)

Web Services Policy-Based Security

OracleAS Adapter Application Explorer (Application Explorer) provides a security model called Web services policy-based security. This section describes how the feature works and how to configure it.

Web services provide a layer of abstraction between the back-end business logic and the user or application running the Web service. This enables easy application integration but raises the issue of controlling the use and implementation of critical and sensitive business logic that is run as a Web service.

Application Explorer controls the use of Web services that use adapters, using a feature called policy-based security. This feature enables an administrator to apply "policies" to Business Services (Web services) to deny or permit their execution.

A policy is a set of privileges dealing with the execution of a Business Service (BS) that can be applied to an existing or new BS. When you set specific rights or privileges inside a policy, you do not have to re-create privileges for every BS that has security concerns in common with other Business Services. Instead, you reuse a policy on multiple Business Services.

The goal of the feature is to secure requests at both the transport and the SOAP request level transmitted on the wire. Some of the policies do not deal with security issues directly, but do affect the runtime behavior of the Web services to which they have been applied.

The Business Services administrator creates an "instance" of a policy type, names it, associates individual users or groups (a collection of users), and then applies that policy to one or more Business Services.

You can assign a policy to a Business Service, or to a method within a Business Service. If a policy is only applied to a method, other methods in that Business Service will not be governed by it. However, if a policy is applied to the Business Service, all methods are governed by it. At runtime, the user ID and password that are sent to OracleAS Adapter Business Services Engine (BSE) in the SOAP request message are verified against the list of users for all policies applied to that specific Business Service. The policy type that is supported is Resource Execution, which dictates who can or cannot execute the Business Service.

When a policy is not applied, the default value for a Business Service is to "grant all". For example, anybody can execute the Business Service, until the Resource Execution policy is associated to the Business Service. At that time, only those granted execution permissions, or users not part of the group that has been denied execution permissions, have access to the Business Service.

Configuring Web Services Policy-Based Security

The following procedures describe how to configure Web services policy-based security.

Creating and Associating a User with a Policy

Before you create instances of policies, you must have a minimum of one user or one group to associate to an instance. You can create users and groups using Application Explorer.

1. Start Application Explorer.
2. Right-click the configuration to which you want to connect, for example, **newtest**. See [Chapter 2, "Configuring OracleAS Adapter for J.D. Edwards One World"](#) for information on creating a new configuration.
3. Select **Connect**.

Nodes appear for Adapters, Events, and Business Services (also known as Web services).



Perform the following steps:

- a. Expand the **Business Services** node.
- b. Expand the **Configuration** node.
- c. Expand the **Security** node.
- d. Expand the **Users and Groups** node.



4. Right-click **Users** and click **New User**.
The New User dialog box is displayed.

Perform the following steps:

- a. In the **Name** field, enter a user ID.
 - b. In the **Password** field, enter the password associated with the user ID.
 - c. In the **Description** field, enter a description of the user (optional).
5. Click **OK**.

The new user is added under the Users node.

Creating a Group to Use with a Policy

To create a group to use with a policy:

1. Start Application Explorer.
2. Right-click the configuration to which you want to connect, for example, **newtest**. See [Chapter 2, "Configuring OracleAS Adapter for J.D. Edwards One World"](#) for information on creating a new configuration.
3. Select **Connect**.

Nodes appear for Adapters, Events, and Business Services (also known as Web services).




Perform the following steps:

- a. Expand the **Business Services** node.
- b. Expand the **Configuration** node.
- c. Expand the **Security** node.
- d. Expand the **Users and Groups** node.



4. Right-click **Groups** and select **New Group**.
The New Group dialog box is displayed.

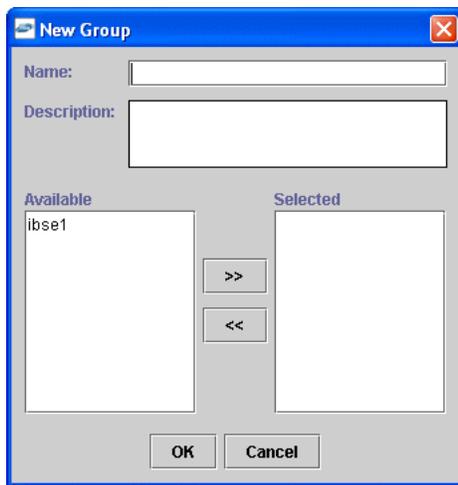

Perform the following steps:

- a. In the **Name** field, enter a name for the group.
 - b. In the **Description** field, enter a description for the group (optional).
 - c. From the available list of users in the left pane, select one or more users and add them to the **Selected** list by clicking the double right facing arrow.
5. When you have selected at least one user, click **OK**.

The new group is added under the Groups node.

Creating an Execution Policy

An execution policy determines who can execute the Business Services to which the policy is applied.

To create an execution policy:

1. Start Application Explorer.
2. Right-click the configuration to which you want to connect, for example, SampleConfig. See [Chapter 2, "Configuring OracleAS Adapter for J.D. Edwards One World"](#) for information on creating a new configuration.
3. Select **Connect**.

Nodes appear for Adapters, Events, and Business Services (also known as Web services).




Perform the following steps:

- a. Expand the **Business Services** node.
- b. Expand the **Configuration** node.
- c. Expand the **Security** node.
- d. Expand the **Policies** node.



4. Right-click **Policies** and select **New Policy**.

The New Policy dialog box is displayed.

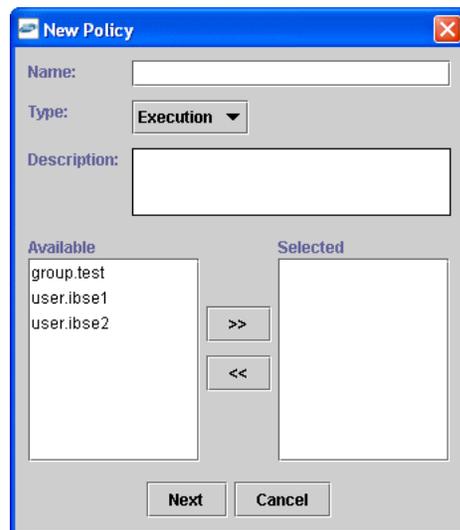

Perform the following steps:

- a. In the **Name** field, enter a name for the policy.
- b. From the **Type** list, select **Execution**.
- c. In the **Description** field, enter a description for the policy (optional).
- d. From the available list of users in the left pane, select one or more users and add them to the **Selected** list by clicking the double right facing arrow.

Note: This user ID is verified against the value in the user ID element of the SOAP header sent to BSE in a SOAP request.

5. When you have selected at least one user selected, click **OK**.
6. Click **Next**.

The New Policy permissions dialog box is displayed.



7. To grant permission to a user or group to execute a Business Service, select the user or group and move them into the **Execution Granted** list by selecting the double left facing arrow.
8. To deny permission to a user or group to execute a Business Service, select the user or group and move them into the **Execution Denied** list by selecting the double right facing arrow.
9. Click **OK**.

The following pane summarizes your configuration.

- **Name** test
- **Type** Execution
- **Description**
- **User and Group Restrictions**
 - group.test Execution Granted

Using the IP and Domain Restrictions Policy Type

You configure the IP and Domain Restriction policy type slightly differently from other policy types. The IP and Domain Restriction policy type controls connection access to BSE and therefore need not be applied to individual Web services. You need not create a policy, however, you must enable the Security Policy option in Application Explorer.

1. Start Application Explorer.

2. Right-click the configuration to which you want to connect, for example, SampleConfig. See [Chapter 2, "Configuring OracleAS Adapter for J.D. Edwards One World"](#) for information on creating a new configuration.


3. Select **Connect**.

Nodes appear for Adapters, Events, and Business Services (also known as Web services).

Perform the following steps:

- a. Expand the **Business Services** node.
- b. Expand the **Configuration** node.
- c. Expand the **Security** node.

4. Right-click **IP and Domain** and select **New IP and Domain Restriction**.

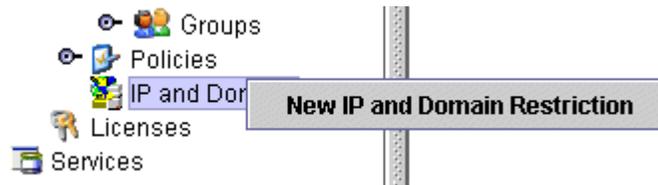

The New IP and Domain Restriction dialog box is displayed.

 A screenshot of the 'New IP and Domain Restriction' dialog box. The dialog has a blue title bar with the text 'New IP and Domain Restriction' and a close button. The main area contains:

- An input field labeled 'IP(Mask)/Domain'.
- A dropdown menu labeled 'Type:' with 'Single' selected.
- A text area labeled 'Description:'.
- A checked checkbox labeled 'Grant Access'.
- 'OK' and 'Cancel' buttons at the bottom.

Perform the following steps:

- a. In the **IP(Mask)/Domain** field, enter the IP or domain name using the following guidelines.

If you select **Single** (Computer) from the **Type** list, you must provide the IP address for that computer. If you only know the DNS name for the computer, click **DNS Lookup** to obtain the IP Address based on the DNS name.

If you select **Group** (of Computers), you must provide the IP address and subnet mask for the computer group.

If you select **Domain**, you must provide the domain name.

- b. From the **Type** list, select the type of restriction.
- c. In the **Description** field, enter a description (optional).

- d. To grant access, select the **Grant Access** check box.
5. Click **OK**.

The new domain is added under the IP and Domain node.

The following pane summarizes your configuration.

- **IP Address (Mask) /Domain** www.yahoo.com
- **Type** Domain
- **Access** Denied
- **Description**

Migrating Repositories

During design time, the Oracle repository is used to store metadata created when using Application Explorer to configure adapter connections, browse EIS objects, configure services, and configure listeners to listen for EIS events. The information in the repository is also referenced at runtime. For management purposes, you can migrate BSE and J2CA repositories that are configured for Oracle to new destinations without affecting your existing configuration. For example, you may want to migrate a repository from a test environment to a production environment.

Migrating a BSE Repository

To migrate a BSE repository:

1. Copy the BSE control service URL, for example:
`http://localhost:7777/ibse/IBSEServlet/admin/iwcontrol.ibs`
2. Open a third party XML editor, for example, XMLSPY.
3. From the menu bar, click **SOAP**.

A list of options appears.



4. Select **Create new SOAP request**.

The WSDL file location dialog box is displayed.




Perform the following steps:

- a. In the **Choose a file** field, paste the BSE control service URL.
- b. Append **?wsdl** to the URL, for example:

```
http://localhost:7777/ibse/IBSEServlet/admin/iwcontrol.ibs?wsdl
```

5. Click **OK**.


The soap operation name dialog box is displayed and lists the available control methods.

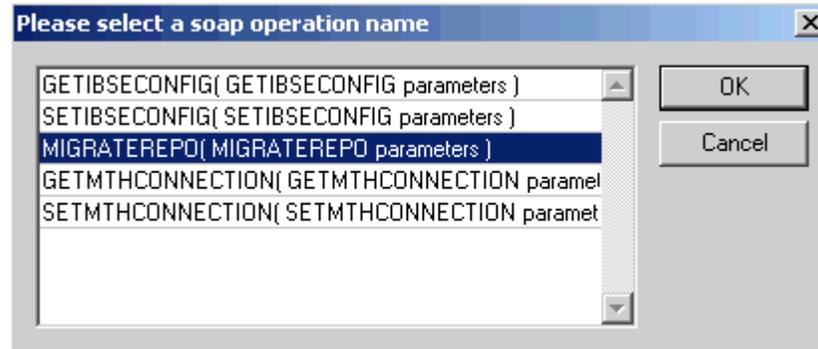

6. Select the **MIGRATEREPO(MIGRATEREPO parameters)** control method and click **OK**.

Note: The **MIGRATEREPO(MIGRATEREPO parameters)** control method is available from the BSE administration console. This control method migrates all Web services to the new (empty) repository. You can choose to migrate select Web services only.

The following window shows the structure of the SOAP envelope.

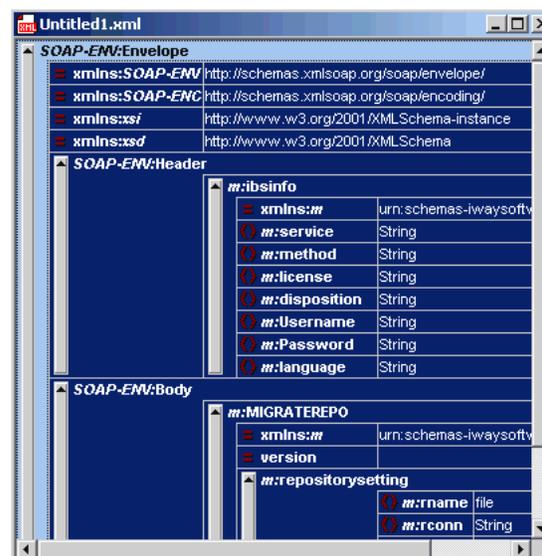

7. Locate the **Text view** icon in the toolbar.



8. To display the structure of the SOAP envelope as text, click the **Text view** icon.

The `<SOAP-ENV:Header>` tag is not required and can be deleted from the SOAP envelope.

9. Locate the following section:

```
<m:MIGRATEREPO xmlns:m="urn:schemas-iwaysoftware-com:jul2003:ibse:config"
version="">
<m:repositorysetting>
<m:rname>oracle</m:rname>
<m:rconn>String</m:rconn>
<m:rdriver>String</m:rdriver>
<m:ruser>String</m:ruser>
<m:rpwd>String</m:rpwd>
</m:repositorysetting>
<m:servicename>String</m:servicename>
</m:MIGRATEREPO>
```

Perform the following steps:

- a. For the `<m:rconn>` tag, replace the String placeholder with a repository URL where you want to migrate your existing BSE repository.

The Oracle repository URL has the following format:

```
jdbc:oracle:thin:@[host]:[port]:[sid]
```

- b. For the `<m:rdriver>` tag, replace the String placeholder with the location of your Oracle driver.
 - c. For the `<m:ruser>` tag, replace the String placeholder with a valid user name to access the Oracle repository.
 - d. For the `<m:rpwd>` tag, replace the String placeholder with a valid password to access the Oracle repository.
10. Perform one of the following migration options.

- If you want to migrate a single Web service from the current BSE repository, enter the Web service name in the `<m:servicename>` tag, for example:

```
<m:servicename>JDEService1</m:servicename>
```

- If you want to migrate multiple Web services from the current BSE repository, duplicate the `<m:servicename>` tag for each Web service, for example:

```
<m:servicename>JDEService1</m:servicename>
<m:servicename>JDEService2</m:servicename>
```

- If you want to migrate all Web services from the current BSE repository, remove the `<m:servicename>` tag.

11. From the menu bar, click **SOAP** and select **Send request to server**.



Your BSE repository and any Web services you specified are now migrated to the new Oracle repository URL you specified.

Migrating a J2CA Repository

To migrate a J2CA repository:

1. Navigate to the location of your J2CA configuration directory where the repository schemas and other information is stored, for example:

```
OracleAS_home\adapters\application\config\JCA_CONFIG
```

Where *JCA_CONFIG* is the name of your J2CA configuration.

2. Locate and copy the `repository.xml` file.
3. Place this file in a new J2CA configuration directory to migrate the existing repository.

Your J2CA repository is migrated to the new J2CA configuration directory.

Configuring J.D. Edwards OneWorld for Outbound Transaction Processing

J.D. Edwards OneWorld enables you to specify outbound functionality for Master Business Functions (MBF).

The following topics describe how to enable outbound transaction processing in J.D. Edwards OneWorld and how to modify the `jde.ini` file for XML support.

- [Specifying Outbound Functionality for a Business Function](#)
- [Modifying the OneWorld jde.ini File](#)

Specifying Outbound Functionality for a Business Function

You can specify outbound functionality for business functions and manage the flow of data. You enable outbound transaction processing using a processing option that controls how a transaction is written.

Outbound Transaction Processing

To process outbound data, you use the:

- Data Export Control table
- Processing Log table

The Data Export Control table manages the flow of the outbound data to third-party applications. The Processing Log table contains all the information about the OneWorld event.

For more information on configuring J.D. Edwards OneWorld for outbound processing, see "Detailed Tasks for OneWorld Operations" in the *J.D. Edwards Interoperability Guide for OneWorld XE*.

Enabling Outbound Transaction Processing

To enable outbound transaction processing:

1. Right-click the application that contains the processing options for the Master Business Functions of the transaction.

For a list of these options, see Appendix B of the *J.D. Edwards Interoperability Guide for OneWorld XE*.
2. From the shortcut menu, select **Prompt for Values**. Click either the **Outbound** tab or the **Interop** tab.
3. Enter the transaction type.

The OneWorld event listener processes only the after image for the business function. You are not required to set the before image function.

The Data Export Control Table and the Processing Log Table

The Data Export Control table manages the flow of the outbound data to third-party applications. OneWorld allows the subscription of multiple vendor-specific objects for an interoperability transaction.

The records in the Data Export Control table are used to determine the vendor-specific objects to call from the Outbound Subsystem batch process (R00460) or the Outbound Scheduler batch process (R00461).

The Processing Log table contains all the information about the OneWorld event including the transaction type, order type, and sequence number from the Data Export Control table.

Using the Export Controls

To use the data export controls:

1. On the Work With Data Export Controls pane, click **Add**.
2. Enter values in the Transaction Type and Order Type fields.
3. For each detail row, enter either a batch process name or version or a function name and the library.
4. To launch the vendor-specific object for an add or insert, enter **1**.
5. For the update, delete, and inquiry actions, enter **1**.
6. In the Launch Immediately column, enter **1**.
7. Click **OK**.

Modifying the OneWorld jde.ini File

Because OracleAS Adapter for J.D. Edwards OneWorld uses XML for the transfer of information to and from J.D. Edwards OneWorld, you must configure the OneWorld environment to support XML. You can do this easily by modifying the OneWorld `jde.ini` file.

Modifying a jde.ini File for XML Support

The following is an example of how to modify a `jde.ini` file to implement XML support.

1. Add the following blocks:

```
[JDENET_KERNEL_DEF6]
;krnlName=CALL OBJECT KERNEL
;dispatchDLLName=jdekrnl.dll
;dispatchDLLFunction=_JDEK_DispatchCallObjectMessage@28
;maxNumberOfProcesses=10
;numberOfAutoStartProcesses=0
krnlName=CALL OBJECT KERNEL
dispatchDLLName=XMLCallObj.dll
dispatchDLLFunction=_XMLCallObjectDispatch@28
maxNumberOfProcesses=10
numberOfAutoStartProcesses=0
[JDENET_KERNEL_DEF15]
```

```

krnlName=XML TRANSACTION KERNEL
dispatchDLLName=XMLTransactions.dll
dispatchDLLFunction=_XMLTransactionDispatch@28
maxNumberOfProcesses=1
numberOfAutoStartProcesses=1

```

The parameters containing an underscore (_) and @28 are for Windows operating systems only. For other operating systems, replace the parameters with the values in the following table.

Operating System	Call Object dispatch DLLName	XML Trans dispatch DLLName
AS400	XMLCALLOBJ	XMLTRANS
HP9000B	libxmlcallojb.sl	libxmltransactions.lo
Sun or RS6000	libxmlcallojb.so	libxmltransactions.so

2. Change the following block:

```

[JDENET]
serviceNameListen=6009
serviceNameConnect=6009
maxNetProcesses=5
maxNetConnections=400
maxKernelProcesses=50
maxKernelRanges=15
netTrace=1
ServiceControlRefresh=5
MonitorOption=0 0 0 0 0 0 0

```

Change maxKernelRanges to 15.

For more information on establishing your J.D. Edwards OneWorld environment for XML support, see "Setting the jde.ini File for XML" in the *J.D. Edwards Interoperability Guide for OneWorld XE*.

Sample Files

The Adapter for J.D. Edwards OneWorld supports the `jdeRequest` and `jdeResponse` XML structures for executing business functions within OneWorld. Using J.D. Edwards OneWorld XML, you can:

- Aggregate business function calls into a single object.
- Use the J.D. Edwards OneWorld ThinNet API.
- Access both Z files and business functions.

The following topics provide examples of the `jdeRequest` and `jdeResponse` XML structures for executing business functions within OneWorld:

- [Issuing a Single-Function Request](#)
- [Issuing a Multiple-Function Request](#)
- [Sample Sales Order Request](#)
- [Sample Sales Order Response](#)

Issuing a Single-Function Request

The following example, `GetEffectiveAddress`, is a single-function call to J.D. Edwards OneWorld, and the result of this request is a standard `jdeResponse` document. In a single-function request, only one `callMethod` within the XML object is specified.

Executing a Business Function with a Single-Function Call

The following is a sample `GetEffectiveAddress` `jdeRequest`.

```
<jdeRequest type="callmethod" user="JDE" pwd="JDE" environment="DV7333"
session="">
<callMethod name="GetEffectiveAddress" app="BSE" runOnError="no">
<params>
  <param name="mnAddressNumber">1001</param>
  <param name="jdDateBeginningEffective"></param>
  <param name="cEffectiveDateExistence10"></param>
  <param name="szAddressLine1"></param>
  <param name="szAddressLine2"></param>
  <param name="szAddressLine3"></param>
  <param name="szAddressLine4"></param>
  <param name="szZipCodePostal"></param>
  <param name="szCity"></param>
  <param name="szCountyAddress"></param>
  <param name="szState"></param>
  <param name="szCountry"></param>
  <param name="szUserId"></param>

```

```

    <param name="szProgramid"></param>
    <param name="jdDateupdated"></param>
    <param name="szWorkstationid"></param>
    <param name="mnTimelastupdated"></param>
    <param name="szNamealpha"></param>
</params>
<onError abort="yes"></onError>
</callMethod>
</jdeRequest>

```

The following is a sample GetEffectiveAddress jdeResponse.

```

<?xml version="1.0"?>

<!DOCTYPE jdeResponse>
<jdeResponse environment="DV7333"
    pwd="JDE"
    session="516.1029417972.68"
    type="callmethod"
    user="JDE">
  <callMethod app="BSE"
    name="GetEffectiveAddress"
    runOnError="no">
    <returnCode code="0"/>
    <params>
      <param name="mnAddressNumber">1001</param>
      <param name="jdDateBeginningEffective"/>
      <param name="cEffectiveDateExistence10"/>
      <param name="szAddressLine1">8055 Tufts Avenue, Suite 1331
    </param>
      <param name="szAddressLine2">
    </param>
      <param name="szAddressLine3">
    </param>
      <param name="szAddressLine4">
    </param>
      <param name="szZipCodePostal">80237 </param>
      <param name="szCity">Denver </param>
      <param name="szCountyAddress"> </param>
      <param name="szState">CO</param>
      <param name="szCountry"/>
      <param name="szUserid"/>
      <param name="szProgramid"/>
      <param name="jdDateupdated"/>
      <param name="szWorkstationid"/>
      <param name="mnTimelastupdated">0</param>
      <param name="szNamealpha">J.D. Edwards & Company </param>
    </params>
  </callMethod>
</jdeResponse>

```

Issuing a Multiple-Function Request

The following example, GetEffectiveAddress, is a multiple-function call to J.D. Edwards OneWorld, and the result of this request is a standard jdeResponse document with multiple sections. In a multiple-function request, more than one callMethod within the XML object is specified.

Executing a Business Function with a Multiple-Function Call

The following is a sample Purchase Order in the jdeRequest format. The XML contains return parameter specifications, as well as file cleanup logic.

```
<?xml version='1.0' encoding='utf-8' ?>
<jdeRequest pwd='password' type='callmethod' user='user' session=''
environment='DV7333' sessionidle=''>
  <callMethod app='XMLTest' name='GetLocalComputerId'
    runOnError='no'>
    <params>
      <param name='szMachineKey' id='machineKey'></param>
    </params>
    <onError abort='yes'>
    </onError>
  </callMethod>
  <callMethod app='XMLTest' name='F4311InitializeCaching'
    runOnError='no'>
    <params>
      <param name='cUseWorkFiles'>2</param>
    </params>
  </callMethod>
  <callMethod app='XMLTest' name='F4311FSBeginDoc' runOnError='no'
    returnNullData='yes'>
    <params>
      <param name='mnJobNumber' id='jobNumber'></param>
      <param name='szComputerID' idref='machineKey'></param>
      <param name='cHeaderActionCode'>A</param>
      <param name='cProcessEdits'>1</param>
      <param name='cUpdateOrWriteToWorkFile'>2</param>
      <param name='cRecordWrittenToWorkFile'>0</param>
      <param name='szOrderCompany' id='orderCompany'>00200</param>
      <param name='szOrderType'>OP</param>
      <param name='szOrderSuffix'>000</param>
      <param name='szBranchPlant'>M30</param>
      <param name='mnSupplierNumber'
        id='supplierNumber'>4343</param>
      <param name='mnShipToNumber'>0.0</param>
      <param name='jdOrderDate'>2000/03/02</param>
      <param name='cEvaluatedReceiptsFlag'>N</param>
      <param name='cCurrencyMode'>D</param>
      <param name='szTransactionCurrencyCode'>USD</param>
      <param name='mnCurrencyExchangeRate'>0.0</param>
      <param name='szOrderedPlacedBy'>SUBSTITUTE</param>
      <param name='szProgramID'>EP4310</param>
      <param name='szPurchaseOrderPrOptVersion'
        id='Version'>ZJDE0001</param>
      <param name='szUserID'>SUBSTITUTE</param>
      <param name='mnProcessID' id='processID'></param>
      <param name='mnTransactionID' id='transactionID'></param>
    </params>
    <onError abort='yes'>
    </onError>
  <callMethod app='XMLTest' name='F4311ClearWorkFiles'
    runOnError='yes' returnNullData='yes'>
    <params>
      <param name='szComputerID' idref='jobNumber'></param>
      <param name='mnJobNumber' idref='machineKey'></param>
      <param name='cClearHeaderFile'>1</param>
      <param name='cClearDetailFile'>1</param>
      <param name='mnLineNumber'>0</param>
      <param name='cUseWorkFiles'>2</param>
    </params>
  </callMethod>
</jdeRequest>
```

```

        <param name='mnProcessID' idref='processID'></param>
        <param name='mnTransactionID' idref='transactionID'></param>
    </params>
</callMethod>
</onError>
</callMethod>
<!-- This is the first EditLine entry -->
<callMethod app='XMLTest' name='F4311EditLine' runOnError='yes'
    returnNullData='no'>
    <params>
        <param name='mnJobNumber' idref='jobNumber'></param>
        <param name='szComputerID' idref='machineKey'></param>
        <param name='cDetailActionCode'>A</param>
        <param name='cProcessEdits'>1</param>
        <param name='cUpdateOrWriteWorkFile'>2</param>
        <param name='cCurrencyProcessingFlag'>Y</param>
        <param name='szPurchaseOrderPrOptVersion'
            idref='version'></param>
        <param name='szOrderCompany' idref='orderCompany'></param>
        <param name='szOrderType'>OP</param>
        <param name='szOrderSuffix'>000</param>
        <param name='szBranchPlant'>                M30</param>
        <param name='mnSupplierNumber'
            idref='supplierNumber'></param>
        <param name='mnShipToNumber'>0.0</param>
        <param name='jdRequestedDate'>2000/03/02</param>
        <param name='jdTransactionDate'>2000/03/02</param>
        <param name='jdPromisedDate'>2000/03/02</param>
        <param name='jdGLDate'>2000/03/02</param>
        <param name='szUnformattedItemNumber'>1001</param>
        <param name='mnQuantityOrdered'>1</param>
        <param name='szDetailLineBranchPlant'>                M30</param>
        <param name='szLastStatus'>220</param>
        <param name='szNextStatus'>230</param>
        <param name='cEvaluatedReceipts'>N</param>
        <param name='szTransactionCurrencyCode'>USD</param>
        <param name='cSourceRequestingPOGeneration'>0</param>
        <param name='szProgramID'>XMLTest</param>
        <param name='szUserID'>SUBSTITUTE</param>
        <param name='szAgreementNumber'></param>
        <param name='mnAgreementSupplement'>0</param>
        <param name='jdEffectiveDate'></param>
        <param name='szPurchasingCostCenter'></param>
        <param name='szObjectAccount'></param>
        <param name='szSubsidiary'></param>
        <param name='mnProcessID' idref='processID'></param>
        <param name='mnTransactionID' idref='transactionID'></param>
    </params>
</callMethod>
<!-- This is the second EditLine entry -->
<callMethod app='XMLTest' name='F4311EditLine' runOnError='yes'
    returnNullData='no'>
    <params>
        <param name='mnJobNumber' idref='jobNumber'></param>
        <param name='szComputerID' idref='machineKey'></param>
        <param name='cDetailActionCode'>A</param>
        <param name='cProcessEdits'>1</param>
        <param name='cUpdateOrWriteWorkFile'>2</param>
        <param name='cCurrencyProcessingFlag'>Y</param>
        <param name='szPurchaseOrderPrOptVersion'

```

```

        idref='version'></param>
<param name='szOrderCompany' idref='orderCompany'></param>
<param name='szOrderType'>OP</param>
<param name='szOrderSuffix'>000</param>
<param name='szBranchPlant'>          M30</param>
<param name='mnSupplierNumber'
  idref='supplierNumber'></param>
<param name='mnShipToNumber'>0.0</param>
<param name='jdRequestedDate'>2000/03/02</param>
<param name='jdTransactionDate'>2000/03/02</param>
<param name='jdPromisedDate'>2000/03/02</param>
<param name='jdGLDate'>2000/03/02</param>
<param name='szUnformattedItemNumber'>2001</param>
<param name='mnQuantityOrdered'>3</param>
<param name='szDetailLineBranchPlant'>          M30</param>
<param name='szLastStatus'>220</param>
<param name='szNextStatus'>230</param>
<param name='cEvaluatedReceipts'>N</param>
<param name='szTransactionCurrencyCode'>USD</param>
<param name='cSourceRequestingPOGeneration'>0</param>
<param name='szProgramID'>XMLTest</param>
<param name='szUserID'>SUBSTITUTE</param>
<param name='szAgreementNumber'></param>
<param name='mnAgreementSupplement'>0</param>
<param name='jdEffectiveDate'></param>
<param name='szPurchasingCostCenter'></param>
<param name='szObjectAccount'></param>
<param name='szSubsidiary'></param>
<param name='mnProcessID' idref='processID'></param>
<param name='mnTransactionID' idref='transactionID'></param>
</params>
</callMethod>
<callMethod app='XMLTest' name='F4311EditDoc' runOnError='no'
  returnNullData='no'>
<params>
  <param name='szOrderSuffix'>000</param>
  <param name='szComputerID' idref='machineKey'></param>
  <param name='mnJobNumber' idref='jobNumber'></param>
  <param name='mnAddressNumber' idref='supplierNumber'></param>
  <param name='szOrderType'>OP</param>
  <param name='szOrderCompany' idref='orderCompany'></param>
  <param name='szVersionProcOption' idref='version'></param>
  <param name='cActionCode'>A</param>
  <param name='mnProcessID' idref='processID'></param>
  <param name='mnTransactionID' idref='transactionID'></param>
</params>
</callMethod>
<callMethod app='XMLTest' name='F4311EndDoc' runOnError='no'
  returnNullData='no'>
<params>
  <param name='szComputerID' idref='machineKey'></param>
  <param name='mnJobNumber' idref='jobNumber'></param>
  <param name='szCallingApplicationName'>XMLTest</param>
  <param name='szVersion' idref='version'></param>
  <param name='szUserID'>SUBSTITUTE</param>
  <param name='mnOrderNumberAssigned'
    id='orderNumberAssigned'></param>
  <param name='cUseWorkFiles'>2</param>
  <param name='cConsolidateLines'>0</param>
  <param name='mnProcessID' idref='processID'></param>

```

```

        <param name='mnTransactionID' idref='transactionID'></param>
    </params>
</callMethod>
<returnParams runOnError='yes' returnNullData='no'>
    <param name='JobNumber' idref='machineKey'></param>
    <param name='ComputerID' idref='jobNumber'></param>
    <param name='OrderNumberAssigned'
        idref='orderNumberAssigned'></param>
</returnParams>
<!-- This is a default error catch for the entire document-->
<onError abort='yes'>
<callMethod app='XMLTest' name='F4311ClearWorkFiles'
    runOnError='yes' returnNullData='no'>
<params>
    <param name='szComputerID' idref='jobNumber'></param>
    <param name='mnJobNumber' idref='machineKey'></param>
    <param name='cClearHeaderFile'>1</param>
    <param name='cClearDetailFile'>1</param>
    <param name='mnLineNumber'>0</param>
    <param name='cUseWorkFiles'>2</param>
    <param name='mnProcessID' idref='processID'></param>
    <param name='mnTransactionID' idref='transactionID'></param>
</params>
</callMethod>
</onError>
</jdeRequest>

```

The Purchase Order response document contains individual return codes for each callMethod executed. In addition, this method returns the order number assigned for the Purchase Order.

```

<?xml version="1.0" encoding="utf-8" ?>

<jdeResponse environment="DV7333" user="JDE" type="callmethod" sessionid=""
session="2612.1026498135.5" pwd="JDE">
    <callMethod name="GetLocalComputerId" runOnError="no" app="XMLTest">
    <returnCode code="0"/>
    <params>
        <param name="szMachineKey" id="machineKey">XEENT</param>
    </params>
    </callMethod>
    <callMethod name="F4311InitializeCaching" runOnError="no" app="XMLTest">
    <returnCode code="0"/>
    <params>
        <param name="cUseWorkFiles">2</param>
    </params>
    </callMethod>
    <callMethod name="F4311FSBeginDoc" returnNullData="yes" runOnError="no"
app="XMLTest">
    <returnCode code="0"/>
    <params>
        <param name="mnJobNumber" id="jobNumber">3</param>
        <param name="szComputerID" idref="machineKey">XEENT</param>
        <param name="cHeaderActionCode">1</param>
        <param name="cProcessEdits">1</param>
        <param name="cUpdateOrWriteToWorkFile">2</param>
        <param name="cRecordWrittenToWorkFile">1</param>
        <param name="cCurrencyProcessingFlag">Z</param>
        <param name="szOrderCompany" id="orderCompany">00200</param>
        <param name="mnOrderNumber">0</param>
    </params>

```

```

<param name="szOrderType">OP</param>
<param name="szOrderSuffix">000</param>
<param name="szBranchPlant">          M30</param>
<param name="szOriginalOrderCompany"/>
<param name="szOriginalOrderNumber"/>
<param name="szOriginalOrderType"/>
<param name="szRelatedOrderCompany"/>
<param name="szRelatedOrderNumber"/>
<param name="szRelatedOrderType"/>
<param name="mnSupplierNumber" id="supplierNumber">17000</param>
<param name="mnShipToNumber">6074</param>
<param name="jdRequestedDate">2002/07/12</param>
<param name="jdOrderDate">2000/03/02</param>
<param name="jdPromisedDate">2002/07/12</param>
<param name="jdCancelDate"/>
<param name="szReference01"/>
<param name="szReference02"/>
  <param name="szDeliveryInstructions01">
</param>
  <param name="szDeliveryInstructions02">
</param>
  <param name="szPrintMessage"/>
  <param name="szSupplierPriceGroup"/>
  <param name="szPaymentTerms"/>
  <param name="szTaxExplanationCode"/>
  <param name="szTaxRateArea"/>
  <param name="szTaxCertificate">          </param>
  <param name="cAssociatedText"/>
  <param name="szHoldCode"/>
  <param name="szFreightHandlingCode"/>
  <param name="mnBuyerNumber">0</param>
  <param name="mnCarrierNumber">0</param>
  <param name="cEvaluatedReceiptsFlag">N</param>
  <param name="cSendMethod"/>
  <param name="szLandedCostRule">  </param>
  <param name="szApprovalRouteCode"/>
  <param name="mnChangeOrderNumber">0</param>
  <param name="cCurrencyMode">D</param>
  <param name="szTransactionCurrencyCode">USD</param>
  <param name="mnCurrencyExchangeRate">0</param>
  <param name="szOrderedPlacedBy">SUBSTITUTE</param>
  <param name="szOrderTakenBy"/>
  <param name="szProgramID">EP4310</param>
  <param name="szApprovalRoutePO"/>
  <param name="szPurchaseOrderPrOptVersion" id="Version">ZJDE0001</param>
  <param name="szBaseCurrencyCode">USD</param>
  <param name="szUserID">SUBSTITUTE</param>
  <param name="cAddNewLineToExistingOrder"/>
  <param name="idInternalVariables">0</param>
  <param name="cSourceOfData"/>
  <param name="mnSODOrderNumber">0</param>
  <param name="szSODOrderType"/>
  <param name="szSODOrderCompany"/>
  <param name="szSODOrderSuffix"/>
  <param name="mnRetainage">0</param>
  <param name="szDescription"/>
<param name="szRemark"/>
<param name="jdEffectiveDate"/>
<param name="jdPhysicalCompletionDate"/>
<param name="mnTriangulationRateFromCurrenc">0</param>

```

```

    <param name="mnTriangulationRateToCurrency">0</param>
    <param name="cCurrencyConversionMethod"/>
    <param name="szPriceAdjustmentScheduleN"/>
    <param name="cAIADocument"/>
    <param name="mnProcessID" id="processID">2612</param>
    <param name="mnTransactionID" id="transactionID">4</param>
  </params>
</callMethod>
<callMethod name="F4311EditLine" returnNullData="no" runOnError="yes"
app="XMLTest">
  <returnCode code="0"/>
  <params>
    <param name="mnJobNumber" idref="jobNumber">3</param>
    <param name="szComputerID" idref="machineKey">XEENT</param>
    <param name="mnOrderLineNumber">1</param>
    <param name="cDetailActionCode">1</param>
    <param name="cProcessEdits">1</param>
    <param name="cUpdateOrWriteWorkFile">2</param>
    <param name="cRecordWrittenToWorkFile">1</param>
    <param name="cCurrencyProcessingFlag">Y</param>
    <param name="szPurchaseOrderPrOptVersion"
      idref="version">ZJDE0001</param>
    <param name="szOrderCompany"
      idref="orderCompany">00200</param>
    <param name="szOrderType">OP</param>
    <param name="szOrderSuffix">000</param>
    <param name="szBranchPlant">          M30</param>
    <param name="mnSupplierNumber" idref="supplierNumber">17000</param>
    <param name="mnShipToNumber">6074</param>
    <param name="jdRequestedDate">2000/03/02</param>
    <param name="jdTransactionDate">2000/03/02</param>
    <param name="jdPromisedDate">2000/03/02</param>
    <param name="jdGLDate">2000/03/02</param>
    <param name="szUnformattedItemNumber">1001
  </param>
    <param name="mnQuantityOrdered">1</param>
    <param name="mnUnitPrice">32,1000</param>
    <param name="mnExtendedPrice">32,1</param>
    <param name="szLineType">S</param>
    <param name="szDescription1">Bike Rack - Trunk Mount</param>
    <param name="szDescription2">          </param>
    <param name="szDetailLineBranchPlant">          M30</param>
    <param name="szLocation"> . .          </param>
    <param name="szLotNumber">          </param>
    <param name="szTransactionUoM">EA</param>
    <param name="szPurchasingUoM">EA</param>
    <param name="szLastStatus">220</param>
    <param name="szNextStatus">230</param>
    <param name="mnDiscountFactor">1</param>
    <param name="szInventoryPriceRule">          </param>
    <param name="szPrintMessage"> </param>
    <param name="cTaxable">Y</param>
    <param name="szGLClassCode">IN30</param>
    <param name="mnBuyerNumber">8444</param>
    <param name="szPurchasingCategoryCode1"> </param>
    <param name="szPurchasingCategoryCode2"> </param>
    <param name="szPurchasingCategoryCode3"> </param>
    <param name="szPurchasingCategoryCode4">240</param>
    <param name="szLandedCostRule"> </param>
    <param name="mnWeight">80</param>
  </params>
</callMethod>

```

```

<param name="szWeightUoM">OZ</param>
<param name="mnVolume">2,25</param>
<param name="szVolumeUoM">FC</param>
<param name="cEvaluatedReceipts">N</param>
<param name="cInventoryInterface">Y</param>
<param name="szTransactionCurrencyCode">USD</param>
<param name="szBaseCurrencyCode">USD</param>
<param name="cSourceRequestingPOGeneration">0</param>
<param name="szProgramID">XMLTest</param>
<param name="szUserID">SUBSTITUTE</param>
<param name="szAgreementNumber" />
<param name="mnAgreementSupplement">0</param>
<param name="jdEffectiveDate" />
<param name="szPurchasingCostCenter" />
<param name="szObjectAccount" />
<param name="szSubsidiary" />
<param name="cStockingType">P</param>
<param name="mnProcessID" idref="processID">2612</param>
<param name="mnTransactionID" idref="transactionID">4</param>
<param name="mnIdentifierShortItem">60003</param>
</params>
</callMethod>
<callMethod name="F4311EditLine" returnNullData="no"
  runOnError="yes" app="XMLTest">
<returnCode code="0" />
<params>
  <param name="mnJobNumber" idref="jobNumber">3</param>
  <param name="szComputerID" idref="machineKey">XEENT</param>
  <param name="mnOrderLineNumber">2</param>
  <param name="cDetailActionCode">1</param>
  <param name="cProcessEdits">1</param>
  <param name="cUpdateOrWriteWorkFile">2</param>
  <param name="cRecordWrittenToWorkFile">1</param>
  <param name="cCurrencyProcessingFlag">Y</param>
  <param name="szPurchaseOrderPrOptVersion"
    idref="version">ZJDE0001</param>
  <param name="szOrderCompany"
    idref="orderCompany">00200</param>
  <param name="szOrderType">OP</param>
  <param name="szOrderSuffix">000</param>
  <param name="szBranchPlant">          M30</param>
  <param name="mnSupplierNumber"
    idref="supplierNumber">17000</param>
  <param name="mnShipToNumber">6074</param>
  <param name="jdRequestedDate">2000/03/02</param>
  <param name="jdTransactionDate">2000/03/02</param>
  <param name="jdPromisedDate">2000/03/02</param>
  <param name="jdGLDate">2000/03/02</param>
  <param name="szUnformattedItemNumber">2001
</param>
  <param name="mnQuantityOrdered">3</param>
  <param name="mnUnitPrice">164,0817</param>
  <param name="mnExtendedPrice">492,2451</param>
  <param name="szLineType">S</param>
  <param name="szDescription1">Cro-Moly Frame, Red          </param>
  <param name="szDescription2">                                </param>
  <param name="szDetailLineBranchPlant">          M30</param>
  <param name="szLocation"> . .                                </param>
  <param name="szLotNumber">                                </param>
  <param name="szTransactionUoM">EA</param>

```

```

<param name="szPurchasingUoM">EA</param>
<param name="szLastStatus">220</param>
<param name="szNextStatus">230</param>
<param name="mnDiscountFactor">1</param>
<param name="szInventoryPriceRule"> </param>
<param name="szPrintMessage"> </param>
<param name="cTaxable">Y</param>
<param name="szGLClassCode">IN30</param>
<param name="szPurchasingCategoryCode1"> </param>
<param name="szPurchasingCategoryCode2"> </param>
<param name="szPurchasingCategoryCode3"> </param>
<param name="szPurchasingCategoryCode4">200</param>
<param name="szLandedCostRule"> </param>
<param name="mnWeight">3</param>
<param name="szWeightUoM">OZ</param>
<param name="szVolumeUoM">FC</param>
<param name="cEvaluatedReceipts">N</param>
<param name="cInventoryInterface">Y</param>
<param name="szTransactionCurrencyCode">USD</param>
<param name="szBaseCurrencyCode">USD</param>
<param name="cSourceRequestingPOGeneration">0</param>
<param name="szProgramID">XMLTest</param>
<param name="szUserID">SUBSTITUTE</param>
<param name="szAgreementNumber" />
<param name="mnAgreementSupplement">0</param>
<param name="jdEffectiveDate" />
<param name="szPurchasingCostCenter" />
<param name="szObjectAccount" />
<param name="szSubsidiary" />
<param name="cStockingType">M</param>
<param name="mnProcessID" idref="processID">2612</param>
<param name="mnTransactionID" idref="transactionID">4</param>
<param name="mnIdentifierShortItem">60062</param>
</params>
</callMethod>
<callMethod name="F4311EditDoc" returnNullData="no"
  runOnError="no" app="XMLTest">
<returnCode code="0" />
<params>
  <param name="szOrderSuffix">000</param>
  <param name="szComputerID" idref="machineKey">XEENT</param>
  <param name="mnJobnumber" idref="jobNumber">3</param>
  <param name="mnAddressNumber"
    idref="supplierNumber">17000</param>
  <param name="szOrderType">OP</param>
  <param name="szOrderCompany"
    idref="orderCompany">00200</param>
  <param name="szVersionProcOption"
    idref="version">ZJDE0001</param>
  <param name="cActionCode">A</param>
  <param name="mnProcessID" idref="processID">2612</param>
  <param name="mnTransactionID" idref="transactionID">4</param>
</params>
</callMethod>
<callMethod name="F4311EndDoc" returnNullData="no"
  runOnError="no" app="XMLTest">
<returnCode code="0" />
<params>
  <param name="szComputerID" idref="machineKey">XEENT</param>
  <param name="mnJobNumber" idref="jobNumber">3</param>

```

```

    <param name="szCallingApplicationName">XMLTest</param>
    <param name="szVersion" idref="version">ZJDE0001</param>
    <param name="szUserID">SUBSTITUTE</param>
    <param name="mnOrderNumberAssigned"
      id="orderNumberAssigned">4884</param>
    <param name="cUseWorkFiles">2</param>
    <param name="cConsolidateLines">0</param>
    <param name="mnProcessID" idref="processID">2612</param>
    <param name="mnTransactionID" idref="transactionID">4</param>
  </params>
</callMethod>
<returnParams>
  <param name="JobNumber" idref="machineKey">XEENT</param>
  <param name="ComputerID" idref="jobNumber">3</param>
  <param name="OrderNumberAssigned" idref="orderNumberAssigned">4884</param>
</returnParams>
</jdeResponse>

```

Sample Sales Order Request

The following is a sample Sales Order request.

Executing a Sales Order Request

The following is an example of a Sales Order request.

```

<?xml version='1.0' encoding='utf-8' ?>
<jdeRequest type='callmethod' user='JDE' pwd='JDE' environment='DV7333'>
  <callMethod name='GetLocalComputerId' app='XMLInterop'
    runOnError='no'>
    <params>
      <param name='szMachineKey' id='2'></param>
    </params>
  </callMethod>
  <callMethod name='F4211FSBeginDoc' app='XMLInterop'
    runOnError='no'>
    <params>
      <param name='mnCMJobNumber' id='1'></param>
      <param name='cCMDocAction'>A</param>
      <param name='cCMProcessEdits'>1</param>
      <param name='szCMComputerID' idref='2'></param>
      <param name='cCMUpdateWriteToWF'>2</param>
      <param name='szCMPProgramID'>XMLInterop</param>
      <param name='szCMVersion'>ZJDE0001</param>
      <param name='szOrderType'>SO</param>
      <param name='szBusinessUnit'>M30</param>
      <param name='mnAddressNumber'>4242</param>
      <param name='jdOrderDate'>2000/03/29</param>
      <param name='szReference'>10261</param>
      <param name='cApplyFreightYN'>Y</param>
      <param name='szCurrencyCode'></param>
      <param name='cWKSourceOfData'></param>
      <param name='cWKProcMode'></param>
      <param name='mnWKSuppressProcess'>0</param>
    </params>
  </callMethod>
  <callMethod name='F4211ClearWorkFile' app='XMLInterop'
    runOnError='yes'>

```

```

    <params>
    <param name='mnJobNo' idref='1'></param>
    <param name='szComputerID' idref='2'></param>
    <param name='mnFromLineNo'>0</param>
    <param name='mnThruLineNo'>0</param>
    <param name='cClearHeaderWF'>2</param>
    <param name='cClearDetailWF'>2</param>
    <param name='szProgramID'>XMLInterop</param>
    <param name='szCMVersion'>ZJDE0001</param>
    </params>
  </callMethod>
</onError>
</callMethod>
<callMethod name='F4211FSEditLine' app='XMLInterop'
  runOnError='yes'>
  <params>
    <param name='mnCMJobNo' idref='1'></param>
    <param name='cMLineAction'>A</param>
    <param name='cCMProcessEdits'>1</param>
    <param name='cCMWriteToWFFlag'>2</param>
    <param name='szCMComputerID' idref='2'></param>
  <!-- param name='mnLineNo'>10261</param -->
    <param name='szItemNo'>1001</param>
    <param name='mnQtyOrdered'>1</param>
    <param name='cSalesTaxableYN'>N</param>
    <param name='szTransactionUOM'>EA</param>
    <param name='szCMPProgramID'>XMLInterop</param>
    <param name='szCMVersion'>ZJDE0001</param>
    <param name='cWKSourceOfData'></param>
  </params>
  <onError abort='no'>
</onError>
</callMethod>
<callMethod name='F4211FSEditLine' app='XMLInterop'
  runOnError='yes'>
  <params>
    <param name='mnCMJobNo' idref='1'></param>
    <param name='cMLineAction'>A</param>
    <param name='cCMProcessEdits'>1</param>
    <param name='cCMWriteToWFFlag'>2</param>
    <param name='szCMComputerID' idref='2'></param>
  <!-- param name='mnLineNo'>10262</param -->
    <param name='szItemNo'>1001</param>
    <param name='mnQtyOrdered'>10</param>
    <param name='cSalesTaxableYN'>N</param>
    <param name='szTransactionUOM'>EA</param>
    <param name='szCMPProgramID'>XMLInterop</param>
    <param name='szCMVersion'>ZJDE0001</param>
    <param name='cWKSourceOfData'></param>
  </params>
  <onError abort='no'>
</onError>
</callMethod>
<callMethod name='F4211FSEndDoc' app='XMLInterop'
  runOnError='no'>
  <params>
    <param name='mnCMJobNo' idref='1'></param>
    <param name='szCMComputerID' idref='2'></param>
    <param name='szCMPProgramID'>XMLInterop</param>
    <param name='szCMVersion'>ZJDE0001</param>
  </params>

```

```

    <param name='cCMUseWorkFiles'>2</param>
  </params>
  <onError abort='no'>
    <callMethod name='F4211ClearWorkFile' app='XMLInterop'
      runOnError='yes'>
  <params>
    <param name='mnJobNo' idref='1'></param>
    <param name='szComputerID' idref='2'></param>
    <param name='mnFromLineNo'>0</param>
    <param name='mnThruLineNo'>0</param>
    <param name='cClearHeaderWF'>2</param>
    <param name='cClearDetailWF'>2</param>
    <param name='szProgramID'>XMLInterop</param>
    <param name='szCMVersion'>ZJDE0001</param>
  </params>
  </callMethod>
  </onError>
  </callMethod>
  <returnParams failureDestination='ERROR.Q'
    successDestination='SUCCESS.Q' runOnError='yes'>
  </returnParams>
  <onError abort='yes'>
    <callMethod name='F4211ClearWorkFile' app='XMLInterop'
      runOnError='yes'>
  <params>
    <param name='mnJobNo' idref='1'></param>
    <param name='szComputerID' idref='2'></param>
    <param name='mnFromLineNo'>0</param>
    <param name='mnThruLineNo'>0</param>
    <param name='cClearHeaderWF'>2</param>
    <param name='cClearDetailWF'>2</param>
    <param name='szProgramID'>XMLInterop</param>
    <param name='szCMVersion'>ZJDE0001</param>
  </params>
  </callMethod>
  </onError>
</jdeRequest>

```

Sample Sales Order Response

This is the corresponding response document for the Sales Order request. There are error messages returned in the document. The error messages can be used within a workflow. For example:

```

<error code="2597">Warning: WARNING: Duplicate Customer Order Number
</error>
<error code="4136">Warning: Pick date is less than todays date</error>

```

Using the Sales Order Response

The following is the jdeResponse document.

```

<?xml version="1.0" encoding="utf-8" ?>
<jdeResponse environment="DV7333" user="JDE" type="callmethod" pwd="JDE">

  <callMethod name="GetLocalComputerId" runOnError="no"
    app="XMLInterop">
  <returnCode code="0"/>
  <params>
    <param name="szMachineKey" id="2">XEENT</param>
  </params>

```

```

</callMethod><callMethod name="F4211FSBeginDoc" runOnError="no"
  app="XMLInterop">
  <returnCode code="1"/>
  <params>
    <param name="mnCMJobNumber" id="1">3</param>
    <param name="cCMDocAction">A</param>
    <param name="cCMProcessEdits">1</param>
    <param name="szCMComputerID" idref="2">XEENT</param>
    <param name="cCMErrorConditions">1</param>
    <param name="cCMUpdateWriteToWF">2</param>
    <param name="szCMProgramID">XMLInterop</param>
    <param name="szCMVersion">ZJDE0001</param>
    <param name="szOrderCo">00200</param>
    <param name="szOrderType">SO</param>
    <param name="szBusinessUnit">M30</param>
    <param name="mnAddressNumber">4242</param>
    <param name="mnShipToNo">4242</param>
    <param name="jdRequestedDate">2000/03/29</param>
    <param name="jdOrderDate">2000/03/29</param>
    <param name="jdPromisedDate">2000/03/29</param>
    <param name="szReference">10261</param>
    <param name="szDeliveryInstructions1"> </param>
    <param name="szDeliveryInstructions2"> </param>
    <param name="szPrintMesg"> </param>
    <param name="szPaymentTerm"> </param>
    <param name="cPaymentInstrument"> </param>
    <param name="mnTradeDiscount">,000</param>
    <param name="szTaxExplanationCode">S </param>
    <param name="szTaxArea">DEN </param>
    <param name="szCertificate"> </param>
    <param name="szHoldOrdersCode"> </param>
    <param name="cPricePickListYN">Y</param>
    <param name="szRouteCode"> </param>
    <param name="szStopCode"> </param>
    <param name="szZoneNumber"> </param>
    <param name="szFreightHandlingCode"> </param>
    <param name="cApplyFreightYN">Y</param>
    <param name="mnCommissionCode1">6001</param>
    <param name="mnCommissionRate1">5,000</param>
    <param name="mnCommissionRate2">,000</param>
    <param name="szWeightDisplayUOM"> </param>
    <param name="szVolumeDisplayUOM"> </param>
    <param name="cMode">D</param>
    <param name="szCurrencyCode">USD</param>
    <param name="jdDateUpdated">2002/07/12</param>
    <param name="szWKBaseCurrency">USD</param>
    <param name="cWKAdvancedPricingYN">N</param>
    <param name="szWKCreditMesg"> </param>
    <param name="szWKTempCreditMesg"> </param>
    <param name="cWKSourceOfData"/>
    <param name="cWKProcMode"/>
    <param name="mnWKSUPPRESSProcess">0</param>
    <param name="szPricingGroup">PREFER </param>
    <param name="mnProcessID">2252</param>
    <param name="mnTransactionID">4</param>
  </params><errors><error code="2597">Warning: WARNING: Duplicate
    Customer Order Number</error><error code="4136">Warning: Pick
    date is less than todays date</error></errors>
</callMethod><callMethod name="F4211FSEditLine" runOnError="yes"
  app="XMLInterop">

```

```
<returnCode code="1"/><params>
  <param name="mnCMJobNo" idref="1">3</param>
  <param name="cMLineAction">A</param>
  <param name="cMProcessEdits">1</param>
  <param name="cMWriteToWFFlag">2</param>
  <param name="cMRecdWrittenToWF">1</param>
  <param name="szCMComputerID" idref="2">XEENT</param>
  <param name="cMErrorConditions">1</param>
  <param name="szOrderCo">00200</param>
  <param name="szOrderType">SO</param>      <param name="szBusinessUnit">
    M30</param>
  <param name="mnShipToNo">4242</param>
  <param name="jdRequestedDate">2000/03/29</param>
  <param name="jdPromisedDate">2000/03/29</param>
  <param name="jdPromisedDlvryDate">2000/03/29</param>
  <param name="szItemNo">1001                </param>
  <param name="szLocation"> . . . </param>
  <param name="szDescription1">Bike Rack Trunk Mount </param>
  <param name="szDescription2">                </param>
  <param name="szLineType">S</param>
  <param name="szLastStatus">900</param>
  <param name="szNextStatus">540</param>
  <param name="mnQtyOrdered">1</param>
  <param name="mnQtyBackordered">1</param>
  <param name="mnUnitPrice">44,99</param>
  <param name="mnUnitCost">32,1000</param>
  <param name="szPrintMesg">                </param>
  <param name="cPaymentInstrument"> </param>
  <param name="cSalesTaxableYN">N</param>
  <param name="cAssociatedText"> </param>
  <param name="szTransactionUOM">EA</param>
  <param name="szPricingUOM">EA</param>
  <param name="mnItemWeight">80</param>
  <param name="szWeightUOM">OZ</param>
  <param name="mnForeignUnitPrice">44,99</param>
  <param name="mnForeignUnitCost">32,1000</param>
  <param name="mnDiscountFactor">1</param>
  <param name="mnCMLLineNo">1</param>
  <param name="szCMPProgramID">XMLInterop</param>
  <param name="szCMVersion">ZJDE0001</param>
  <param name="mnSupplierNo">4343</param>
  <param name="mnWKOrderTotal">44,99</param>
  <param name="mnWKForeignOrderTotal">44,99</param>
  <param name="mnWKTTotalCost">32,1</param>
  <param name="mnWKForeignTotalCost">32,1</param>
  <param name="cWKSourceOfData"/>
  <param name="cWKCheckAvailability">1</param>
  <param name="mnLastLineNoAssigned">1</param>
  <param name="cStockingType">P</param>
  <param name="cParentItmMethdOfPriceCalc">1</param>
  <param name="mnShortItemNo">60003</param>
  <param name="szSalesOrderFlags">0</param>
  <param name="jdPriceEffectiveDate">2000/03/29</param>
  <param name="jdPromisedShip">2000/03/29</param>
  <param name="mnQuantityAvailable">-34</param>
  <param name="mnItemVolume_ITVL">2,25</param>
  <param name="szVolumeUOM_VLUM">FC</param>
  <param name="szRevenueBusinessUnit"> M30</param>
  <param name="mnProcessID">2252</param>
  <param name="mnTransactionID">4</param>
```

```

</params><errors><error code="030B">Warning: Order Quantity
  Exceeds what&apos;s Available</error></errors>
</callMethod><callMethod name="F4211FSEditLine" runOnError="yes"
  app="XMLInterop"><returnCode code="1"/></params>
<param name="mnCMJobNo" idref="1">3</param>
<param name="cMLineAction">A</param>
<param name="cMProcessEdits">1</param>
<param name="cMWriteToWFFlag">2</param>
<param name="cMRecdWrittenToWF">1</param>
<param name="szCMComputerID" idref="2">XEENT</param>
<param name="cMErrorConditions">1</param>
<param name="szOrderCo">00200</param>
<param name="szOrderType">SO</param>
<param name="szBusinessUnit">          M30</param>
<param name="mnShipToNo">4242</param>
<param name="jdRequestedDate">2000/03/29</param>
<param name="jdPromisedDate">2000/03/29</param>
<param name="jdPromisedDlvryDate">2000/03/29</param>
<param name="szItemNo">1001          </param>
<param name="szLocation"> . . </param>
<param name="szDescription1">Bike Rack-Trunk Mount </param>
<param name="szDescription2">          </param>
<param name="szLineType">S</param>
<param name="szLastStatus">900</param>
<param name="szNextStatus">540</param>
<param name="mnQtyOrdered">10</param>
<param name="mnQtyBackordered">10</param>
<param name="mnUnitPrice">44,99</param>
<param name="mnUnitCost">32,1000</param>
<param name="szPrintMesg">          </param>
<param name="cPaymentInstrument"> </param>
<param name="cSalesTaxableYN">N</param>
<param name="cAssociatedText"> </param>
<param name="szTransactionUOM">EA</param>
<param name="szPricingUOM">EA</param>
<param name="mnItemWeight">800</param>
<param name="szWeightUOM">OZ</param>
<param name="mnForeignUnitPrice">44,99</param>
<param name="mnForeignUnitCost">32,1000</param>
<param name="mnDiscountFactor">1</param>
<param name="mnCMLineNo">2</param>
<param name="szCMProgramID">XMLInterop</param>
<param name="szCMVersion">ZJDE0001</param>
<param name="mnSupplierNo">4343</param>
<param name="mnWKOrderTotal">494,89</param>
<param name="mnWKForeignOrderTotal">494,89</param>
<param name="mnWKTotalCost">321</param>
<param name="mnWKForeignTotalCost">321</param>
<param name="cWKSourceOfData"/>
<param name="cWKCheckAvailability">1</param>
<param name="mnLastLineNoAssigned">2</param>
<param name="cStockingType">P</param>
<param name="cParentItmMethdOfPriceCalc">1</param>
<param name="mnShortItemNo">60003</param>
<param name="szSalesOrderFlags">          0 </param>
<param name="jdPriceEffectiveDate">2000/03/29</param>
<param name="jdPromisedShip">2000/03/29</param>
<param name="mnQuantityAvailable">-44</param>
<param name="mnItemVolume_ITVL">22,5</param>
<param name="szVolumeUOM_VLUM">FC</param>

```

```
<param name="szRevenueBusinessUnit"> M30</param>
<param name="mnProcessID">2252</param>
<param name="mnTransactionID">4</param>
</params><errors><error code="030B">Warning: Order Quantity
  Exceeds what&apos;s Available</error></errors>
</callMethod><callMethod name="F4211FSEndDoc" runOnError="no"
  app="XMLInterop"><returnCode code="0"/>
<params>
  <param name="mnCMJobNo" idref="1">3</param>
  <param name="mnSalesOrderNo">2623</param>
  <param name="szCMComputerID" idref="2">XEENT</param>
  <param name="cCMErrorCondition">0</param>
  <param name="szOrderType">SO</param>
  <param name="szKeyCompany">00200</param>
  <param name="mnOrderTotal">494,89</param>
  <param name="szWorkstationID">XEENT</param>
  <param name="szCMProgramID">XMLInterop</param>
  <param name="szCMVersion">ZJDE0001</param>
  <param name="mnTimeOfDay">174220</param>
  <param name="cCMUseWorkFiles">2</param>
  <param name="cCMProcessEdits">1</param>
  <param name="mnProcessID">2252</param>
  <param name="mnTransactionID">4</param>
</params> </callMethod><returnParams failureDestination="ERROR.Q"
  successDestination="SUCCESS.Q">
</returnParams></jdeResponse>
```

Glossary

adapter

Provides universal connectivity by enabling an electronic interface to be accommodated (without loss of function) to another electronic interface.

agent

Supports service protocols in listeners and documents.

business service

Also known as a Web service. A Web service is a self-contained, modularized function that can be published and accessed across a network using open standards. It is the implementation of an interface by a component and is an executable entity.

channel

Represents configured connections to particular instances of back-end systems. A channel binds one or more event ports to a particular listener managed by an adapter.

listener

A component that accepts requests from client applications.

port

Associates a particular business object exposed by the adapter with a particular disposition. A disposition is a URL that defines the protocol and location of the event data. The port defines the end point of the event consumption.

A

access methods, 1-3, 2-24
access rights, 8-2
action codes, 7-3
adapter configuration
 requirements, 5-1, 6-1
 updating, 3-2
adapter connections, 3-4
adapter exceptions, 7-2 to 7-5
adapter integration
 BPEL Process Manager and, 4-1, 5-1
 InterConnect and, 6-1
Adapter Lib Directory parameter, 2-2 to 2-4
adapter log files, 6-24
adapter types, 1-1, 1-6, 3-1
adapter.ini file, 6-12
AdapterName parameter, 3-4 to 3-5
adapters, 1-1 to 1-8, 6-13, 6-21
 configuring, 3-2
 deploying, 1-5, 3-1 to 3-2, 4-2
 integrating, 5-1, 6-1
 troubleshooting, 7-1 to 7-11
Add Channel dialog box, 2-22, 5-12, 6-15
Add Port dialog box, 2-20
Add Target dialog box, 2-9
Address Book Master file, 7-3
Address Book Revisions program, 7-3
address numbers, 7-3
Admin Password parameter, 2-3 to 2-4
Admin User parameter, 2-4
agents, 1-2
alias section of iwoevent.cfg file, 2-25
aliases, 2-25 to 2-26
application adapter integration
 BPEL Process Manager and, 4-1, 5-1
 InterConnect and, 6-1
application adapters, 1-1 to 1-8, 6-13, 6-21
 configuring, 3-2
 deploying, 1-5, 3-1 to 3-2, 4-2
 integrating, 5-1, 6-1
 troubleshooting, 7-1 to 7-11
application clients, 3-4
Application Explorer, 1-5, 2-1, 2-19, 4-2, 6-15
 application systems and, 2-9
 channels and, 2-19, 2-21 to 2-24

 debugging and, 7-1 to 7-2
 event ports and, 2-19 to 2-21
 J2CA configuration and, 3-2
 OracleAS Adapter J2CA and, 7-3
 schemas and, 2-13
 security and, 8-1, 8-6
 testing and, 7-1 to 7-2
 troubleshooting, 7-1 to 7-2
 WSDL files and, 5-12
Application parameter, 2-11, 5-14, 6-17
application systems, 2-19
 Application Explorer and, 2-9
 supported, 2-9
application views, 6-5, 6-9, 6-20
Applications tab, 5-4, 5-16
Applications-Navigator pane, 4-16, 4-19, 5-10, 5-19
Assign activities, 4-8 to 4-9, 5-8 to 5-9
Assign Activity dialog box, 5-8
Assign activity icon, 4-8, 5-8
Assign settings window, 4-8 to 4-9
Audit tab, 5-12
Available list, 8-4 to 8-5
Available Port(s) field, 6-16

B

back-end workflows
 calling, 4-15, 4-19
Basic tab, 2-22
batch processes, 1-3, A-2
batch script, 7-1
batch.log file, 2-24
BPEL Console, 4-15 to 4-20, 5-10, 5-23
BPEL Designer, 4-1
BPEL domain
 passwords and, 5-23
BPEL Process Manager
 adapter integration and, 4-1, 5-1
 adapter request-response services and, 4-15, 4-19
 OracleAS Adapter for J.D. Edwards OneWorld
 and, 4-1
BPEL Process Manager Server node, 5-4
BPEL Process Project dialog box, 4-12, 5-5, 5-17
BPEL processes, 4-2 to 4-10, 5-4, 5-16
 deploying, 4-16, 4-19, 5-10, 5-19
 designing, 5-5

- JDeveloper and, 4-16, 4-19 to 4-20
- managing, 4-17, 5-11
- monitoring, 4-16, 4-20
- testing, 4-18, 5-10 to 5-11
- BPEL Processes tab, 4-17, 5-10
- BPEL projects, 4-2 to 4-10, 5-4
- BPEL Server, 4-6, 4-13, 4-16, 4-19, 5-10, 5-18
 - connecting to, 5-2 to 5-4
- Branch Plant Item Information, 7-3
- BSE (OracleAS Adapter Business Services Engine), 1-5
 - configuring, 2-2, 2-7
 - connection access to, 8-6
 - troubleshooting, 7-4 to 7-11
- BSE configuration page, 2-2 to 2-3
- BSE control service URL, 8-8
- BSE deployment, 1-5, 2-20
- BSE log, 6-17
- BSE repositories, 8-8 to 8-10
- BSE settings window, 2-3
- BSE system settings, 2-3 to 2-5
- BSE URL field, 2-7
- business events, 1-1
- business function calls, B-1
- business functions, 1-7, A-2, B-1
 - creating schemas for, 2-13
 - executing, B-1 to B-3
- business services
 - creating, 2-17 to 2-18
 - deploying, 8-1
 - testing, 2-18
- Business Services node, 8-2 to 8-5, 8-7

C

- CCI (Common Client Interface), 3-1
- CCI calls, 3-1
- channel configuration, 2-22
- channel configuration parameters, 2-22, 5-14, 6-17
 - Application, 2-22, 5-14, 6-17
 - Host, 2-22, 5-13
 - Is Keep Alive, 2-22, 5-13, 6-16
 - Is Length, 6-16
 - Is Length Prefix, 2-22, 5-13
 - Is XML, 2-22, 5-13, 6-16
 - JDE Environment, 2-22, 5-14, 6-17
 - Port Number, 2-23, 5-13
 - Schema style, 5-14, 6-17
 - Server IP address, 2-22, 5-14, 6-17
 - Server Port, 2-22, 5-14, 6-17
 - Synchronization Type, 2-22
 - User id, 2-22, 5-14, 6-17
 - User password, 2-22, 5-14, 6-17
- channels, 2-19
 - creating, 2-21 to 2-24, 5-12 to 5-14, 6-15
 - debugging and, 5-14
 - deleting, 2-24
 - editing, 2-24
 - ports and, 2-21 to 2-22
 - starting, 2-23, 5-14, 6-17, 6-21
 - stopping, 2-23, 5-14
 - testing and, 5-14
- Channels node, 2-23, 5-12, 6-15, 6-21
- channels. *See also* listeners
- Choose Import Type dialog box, 6-3, 6-7
- Choose Root Element dialog pane, 6-7
- code
 - exporting, 6-10
- Common Client Interface (CCI), 3-1
- common section of iwoevent.cfg file, 2-25
- common views
 - creating, 6-2, 6-18
 - mapping, 6-5, 6-9, 6-20
- Compiler tab, 4-16, 4-20, 5-10
- Configuration node under Business Services, 8-2 to 8-5, 8-7
- configuration parameters, 3-3, 3-5
 - IWayConfig, 3-3
 - IWayHome, 3-3
 - IWayRepoPassword, 3-3
 - IWayRepoURL, 3-3
 - IWayRepoUser, 3-3
 - Loglevel, 3-3
- configuration requirements
 - integration and, 5-1, 6-1
- configurations
 - OracleAS Adapter Business Services Engine (BSE), 2-7 to 2-8
 - overwriting, 3-3 to 3-5
- Configurations node, 2-7 to 2-8
- configuring adapters, 3-2
- configuring BSE system settings, 2-3 to 2-5
- configuring repositories, 2-5 to 2-6
- connecting to BPEL Server, 5-2 to 5-4
- connecting to J.D. Edwards OneWorld, 2-9 to 2-12, 7-2
 - connecting to OracleAS Adapter J2CA, 7-3
- Connection dialog box, 2-12
- connection factories, 3-4
- connection information, 2-25 to 2-26, 7-2
- connection parameters, 4-2 to 4-3, 4-14, 5-4, 7-2
 - AdapterName, 3-4
 - Application, 2-12
 - Config, 3-4
 - Country, 3-4
 - Hostname, 2-1 to 2-3, 2-8
 - JDE environment, 2-12
 - Language, 3-4
 - Loglevel, 3-4
 - Password, 2-2 to 2-3, 3-4 to 3-5
 - Port, 2-2 to 2-3
 - Server IP address, 2-12
 - Server Port, 2-12
 - User id, 2-11 to 2-12
 - User password, 2-11 to 2-12, 5-14
 - UserName, 3-4
- connection pooling, 3-4
- Connection tab, 5-4
- connections
 - creating, 2-9 to 2-12, 4-2 to 4-3

- troubleshooting, 7-2 to 7-3
- Connections tab, 5-2
- ConnectionSpec, 3-4 to 3-5
- Connector
 - deploying to Oracle Application Server, 3-1
- connector factories, 3-2
- connector factory objects, 3-2
 - multiple, 3-3
- control methods, 8-9
- copy rules
 - creating, 5-9
- Copy Rules tab, 5-8
- Country parameter, 3-4
- Create BPEL Process Manager Connection dialog box, 5-3
- Create Copy Rule dialog box, 4-10, 5-9
- Create Event dialog box, 6-18
- Create Partner Link dialog box, 4-5, 4-12, 5-5, 5-6, 5-17 to 5-18
- Create Procedure window, 6-3
- Create Rules tab, 4-8 to 4-9
- Create Variable dialog box, 4-8, 5-7, 5-19
- creating BPEL processes, 4-2 to 4-10, 5-5
- creating BPEL projects, 5-4
- creating channels, 5-12 to 5-14, 6-15
- creating common views, 6-2, 6-18
- creating copy rules, 5-9
- creating DTDs, 6-14
- creating events, 6-18
- creating ports, 6-15
- creating repository projects, 2-7 to 2-8
- creating schemas, 2-13 to 2-14

D

- Dashboard tab, 4-16, 4-20
- data
 - manipulating, 4-8, 4-15, 4-19
 - sending and receiving, 4-7
- data dictionaries, 7-3
- Data Export Control table, 1-3, A-1 to A-2
- data export controls, A-2
- data management, A-1
- data queues, 1-3
- Data Source Name (DSN), 2-26
- database connections, 3-3
- database repositories, 2-6
- database tables, 1-2
- databases, 3-3
- date ranges, 7-3
- Debug Level parameter, 2-4
- DEBUG log level, 3-5
- Define Application View window, 6-8
- Define Mapping IN Arguments window, 6-9
- Define Mapping OUT Arguments window, 6-10
- Define Stored Procedures dialog box, 6-6
- deploying adapters, 1-5, 3-1 to 3-2, 4-2
- deploying outbound processes, 5-10
- deployments
 - BSE, 1-5

- Description field, 2-10, 2-17, 2-22, 8-3 to 8-5, 8-7
- design time, 5-12, 8-8
 - configuring, 4-2, 5-1, 6-1
- design time service adapter connections, 3-4
- designing BPEL processes, 4-2 to 4-10, 5-5
- disposition parameters, 2-20
 - errorTo, 2-20
 - Location, 2-20
- dispositions
 - RMI, 2-20
- DNS Lookup option, 8-7
- DNS name, 8-7
- Document Type Definitions (DTD), 6-3, 6-7
 - creating, 6-14
- document types
 - request, 1-2, B-1 to B-3, B-11, B-13
 - response, 1-2, B-6, B-13 to B-17
 - XML, 1-2
- Domain Name System (DNS), 8-7
- domain names, 8-7
- Domain option, 8-7
- Domain Password field, 4-16, 4-19, 5-10
- DSN (Data Source Name), 2-26
- DTD (Document Type Definitions), 6-3, 6-7
 - creating, 6-14

E

- Eclipse. *See* JDeveloper
- Edit Invoke dialog box, 4-7, 5-7
- Edit Port dialog box, 6-15
- Edit Receive dialog box, 5-19
- editing targets, 2-12
- EIS (enterprise information systems), 1-2, 3-5
- EJB (Enterprise Java Beans), 3-1
 - elements
 - root, 6-3, 6-7, 6-20
- Encoding parameter, 2-4
- Enterprise Connector for J2EE Connector Architecture (J2CA), 1-5, 2-7 to 2-8
 - Oracle Application Server and, 3-1
- enterprise information systems (EIS), 1-2, 3-5
- Enterprise Java Beans (EJB), 3-1
- error messages, 4-15 to 4-16, 4-20, 5-8, 5-10, 7-2 to 7-11
 - target systems and, 7-5
- errorTo parameter, 2-20
- event adapters, 2-19 to 2-24
- event data
 - receiving, 5-12 to 5-23
- event integration, 5-12 to 5-23, 6-14 to 6-24
 - verifying, 6-24
- event listeners, 2-24 to 2-25
- event messages, 5-12, 5-23
- event ports, 1-1, 2-19 to 2-21
 - creating, 2-21
 - deleting, 2-21
 - editing, 2-21
- events, 1-1, 2-19, A-2
 - configuring, 2-19 to 2-21

- creating, 6-18
- publishing, 6-19
- triggering, 6-17
- verifying, 5-23

Events node, 2-20 to 2-21

Execution Denied list, 8-6

Execution Granted list, 8-6

Existing Service Names list, 2-17

Export Application dialog box, 6-11

export controls, A-2

Export WSDL dialog box, 5-2

exporting code from iStudio, 6-10

external listeners, 1-3

F

fault code elements, 7-5

fault string elements, 7-5

file system repositories, 2-5

flat files, 1-2 to 1-3

flow of data, A-1

functional modeling, 6-1

G

generating schemas, 2-13 to 2-14

GenJava program, 2-10

GenJava repository, 2-10

GenJava utility, 2-14

GenJava wrappers, 2-14

Grant Access check box, 8-7

Group (of Computers) option, 8-7

Group node, 8-4

groups, 8-3

H

Home field, 2-8

Host parameter, 2-22, 5-13, 6-16

Hostname parameter, 2-1 to 2-3, 2-8, 5-4, 6-12

I

Implement wizard, 6-7

implemented procedures, 6-6

IN arguments, 6-3, 6-7

IN parameters, 6-3

inbound BPEL processes, 5-2 to 5-4, 5-16

inbound interactions, 4-19, 5-16

inbound J2CA services, 5-12

inbound processing, 1-4

inbound services, 5-19

Initiate tab, 4-18, 5-10 to 5-11

input records

- creating, 3-5

Input Variable field, 4-8

Inspection date, 7-3

installation directories, 3-3

installation requirements

- integration and, 5-1, 6-1

instances of policy types, 8-1

Instances tab, 5-23

integration requirements, 5-1, 6-1

integration scenarios, 5-1, 6-1

interactions

- creating, 3-5
- executing, 3-5
- inbound, 4-19, 5-16
- outbound, 4-15, 5-2 to 5-12

InterConnect

- adapter integration and, 6-1

internal listeners, 1-3

interoperability framework, 1-3

- inbound processing, 1-4
- outbound processing, 1-4

interoperability transactions, A-2

invalid address numbers, 7-3

invalid records, 7-3

Invalid Settings warning, 4-15 to 4-16, 5-8

Invoke activities, 4-7, 5-7 to 5-9

Invoke wizard, 6-4

invoking procedures, 6-4 to 6-10

IP (Mask)/Domain field, 8-7

IP addresses, 2-11, 2-26, 6-17, 8-7

IP and Domain Restriction policy type, 8-6

Is Keep Alive parameter, 2-22, 5-13, 6-16

Is Length Prefix parameter, 2-22, 5-13, 6-16

Is XML parameter, 2-22, 5-13, 6-16

iStudio, 6-2, 6-7

- exporting from, 6-10
- starting, 6-18

Item Branch records, 7-3

IWAE function, 3-5

IWAFConnectionSpec, 3-4 to 3-5

IWAFInteractionSpec, 3-5

IWayConfig parameter, 3-3

IWayHome parameter, 3-3

IWayRepoPassword parameter, 3-3

IWayRepoURL parameter, 3-3

IWayRepoUser parameter, 3-3

IWOEvent listener exit, 2-24

iwoevent.cfg file, 2-25 to 2-26

iwoevent.log file, 2-24

iwse.ora file, 2-6

J

J2CA (Enterprise Connector for J2EE Connector Architecture), 1-5, 2-7 to 2-8

J2CA configuration, 2-6

- Application Explorer and, 3-2

J2CA deployment, 2-20

J2CA repositories, 8-11

J2CA resource adapters, 1-1, 3-1

J2CA services, 5-2 to 5-12

JAR files, 5-14, 7-2

Java application clients, 3-4

Java files, 2-10

Java program clients, 3-1

J.D. Edwards OneWorld, 3-5

- connecting to, 2-9 to 2-12, 7-2

J.D. Edwards OneWorld Event Listener, 2-24 to 2-25
J.D. Edwards OneWorld ThinNet API, 1-4, 1-7, 2-13, B-1
J.D. Edwards processes, 4-15, 4-19
JDE Environment parameter, 2-11, 5-14, 6-17
JDE OneWorld dialog box, 2-10
JDE Service process link, 4-17, 5-11
jde TransactionName, 2-26
JDEdwards node, 5-12, 6-15, 6-21
JDEFL log file, 6-24
JDEFL node, 6-19
jde.ini file, A-2 to A-3
jdeRequest documents, B-1 to B-3, B-11, B-13
jdeResponse documents, B-6, B-11, B-13 to B-17
JDeveloper, 4-2 to 4-4, 5-2 to 5-4
 BPEL processes and, 4-16, 4-19 to 4-20, 5-10
JNDI lookup, 3-4

L

Language parameter, 2-4, 3-4
Last Service date, 7-3
License and Method dialog box, 2-17
License field, 2-17
licenses, 2-17
list of nodes, 7-2
listener configuration files, 2-25
listener exits, 2-24
listener types, 1-3
listeners, 1-3, 2-24 to 2-26
listeners. *See also* channels
Location parameter, 2-20
log files, 7-1
log levels, 3-3 to 3-5
Loglevel parameter, 3-3 to 3-4
logon parameters, 7-2
Logon tab, 2-10

M

managed connector factories, 3-2
managed connector factory objects, 3-2
 multiple, 3-3
ManagedConnectionFactory parameter, 3-3 to 3-5
manipulating data, 4-8, 4-15, 4-19
Mapping Parameters window, 6-5, 6-8 to 6-9, 6-20
mapping security, 3-5
mapping variables, 5-9
mapping views, 6-5
mappings
 verifying, 5-9
Master Business Functions (MBF), 1-2 to 1-5, 2-9, A-1
 executing, 2-13
MBF (Master Business Functions), 1-2 to 1-5, 2-9, A-1
 executing, 2-13
Message Type list, 6-4, 6-19
messages, 1-1 to 1-2
 error, 4-15 to 4-16, 4-20, 5-10
 event, 5-12, 5-23
 logging, 4-16, 4-19, 5-10

 warning, 5-8 to 5-10
Messages log area, 4-16, 4-19, 5-10
metadata, 2-5, 8-8
Method Name field, 2-17
methods, 8-1
migrating repositories, 8-8 to 8-10
migrating Web services, 8-10
multiple-function requests, B-2 to B-6
My Role field, 4-6, 4-13, 5-6
My Role list, 5-18

N

Name field, 2-10, 2-22, 4-8, 8-3 to 8-5
Namespace field, 4-12, 5-5, 5-17
New Configuration dialog box, 2-7 to 2-8
New Gallery window, 4-4, 4-11, 5-5, 5-16
New Group dialog box, 8-4
New Policy permissions dialog box, 8-6
New User dialog box, 8-2
Node list, 7-2
nodes, 2-7 to 2-8, 2-12, 2-20 to 2-22
 Business Services, 8-2 to 8-5
 Channels, 2-23, 5-12, 6-15, 6-21
 Configuration under Business Services, 8-2 to 8-5, 8-7
 Configurations, 2-7 to 2-8
 Events, 2-20 to 2-21
 Group, 8-4
 JDEdwards, 5-12, 6-15, 6-21
 JDEFL, 6-19
 Policies, 8-5
 Ports, 2-21, 6-15
 Process, 5-9
 Security, 8-5, 8-7
 Users, 8-3
 Users and Groups, 8-2 to 8-3
Number of Async. Processors parameter, 2-4

O

ObjectCopy transformations, 6-5, 6-9, 6-20
OC4J (Oracle Application Server Containers for J2EE), 3-1, 6-13, 6-21
 deploying, 3-1 to 3-7
OC4J-ra.xml file, 3-3
OneWorld environment, A-2 to A-3
OneWorld Event Listener, 2-24 to 2-25
OneWorld events, A-2
Open dialog box, 6-18
Operation field, 4-7
Oracle Application Server
 Enterprise Connector for J2EE Connector Architecture and, 3-1
 installation directory and, 3-3
Oracle Application Server Containers for J2EE (OC4J), 3-1, 6-13, 6-21
 deploying, 3-1 to 3-7
Oracle BPEL Console, 4-15 to 4-20, 5-10
Oracle BPEL Server, 4-6, 4-13, 4-16, 4-19, 5-10, 5-18

- connecting to, 5-2 to 5-4
- Oracle databases, 3-3
- Oracle iStudio, 6-2, 6-7
 - exporting code from, 6-10
 - starting, 6-18
- Oracle JDeveloper, 4-2 to 4-4, 5-2 to 5-4
 - BPEL processes and, 4-16, 4-19 to 4-20, 5-10
- Oracle repositories, 6-2, 6-17
 - configuring, 2-5 to 2-6
 - migrating, 8-8 to 8-10
- OracleAS Adapter Application Explorer. *See* Application Explorer
- OracleAS Adapter Business Services Engine (BSE), 1-5
 - configuring, 2-2, 2-7
 - troubleshooting, 7-4 to 7-11
- OracleAS Adapter for J.D. Edwards OneWorld, 6-13, 6-21
 - BPEL Process Manager and, 4-1
 - configuring, 2-1
 - deploying, 1-1, 4-2
 - integrating with J.D. Edwards OneWorld, 5-2 to 5-12
 - InterConnect and, 6-1
 - troubleshooting, 7-1 to 7-11
- OracleAS Adapter J2CA, 3-5
 - Application Explorer and, 7-3
 - connecting to, 7-3
- OracleAS InterConnect
 - adapter integration and, 6-1
- Order Type field, A-2
- OUT arguments, 6-7
- OUT parameters, 6-3, 6-9
- outbound agents, 2-24
- outbound integration, 5-2 to 5-12
- outbound interactions, 4-15, 5-2 to 5-10, 6-2 to 6-14
- outbound JCA services, 5-2 to 5-12
- outbound processes, 5-10
- outbound processing, 1-4, 2-24, A-1 to A-2
- Outbound Scheduler batch process, A-2
- Outbound Subsystem batch process, A-2
- outbound transactions, 2-24
- Output Variable field, 4-8

P

- parameter types
 - channel configuration, 2-22, 5-14, 6-17
 - configuration, 3-3
 - connection, 2-12, 3-4, 4-2 to 4-3, 4-14, 5-4, 7-2
 - disposition, 2-20
 - repository, 2-5
 - repository migration, 8-9
 - security, 2-4
 - system, 2-4
- Parameters tab, 2-13
- Partner Link field, 4-7
- Partner Link Type field, 4-6, 4-13, 5-6
- partner links, 5-5, 5-17 to 5-18
- Partner Role field, 4-6, 4-13, 5-6, 5-18

- Partner Role list, 5-6
- PartnerLink activities, 4-5, 4-12
- Password field, 8-3
- Password parameter, 2-2 to 2-3, 3-4 to 3-5, 6-17, 7-2
- Password Prompt dialog box, 4-16, 4-19, 5-10
- passwords, 3-3 to 3-5, 4-16, 4-19, 5-10, 5-19
 - BPEL domain and, 5-23
- permissions, 8-1, 8-6
- PL/SQL code, 6-10
- policies, 8-1, 8-4
- Policies node, 8-5
- Policy parameter, 2-4
- policy types
 - instances of, 8-1
 - IP and Domain Restriction, 8-6
- policy-based security, 8-1 to 8-8
- Port Number parameter, 2-23, 5-4, 5-13, 6-12, 6-16
- port numbers, 2-11
- Port parameter, 2-2 to 2-3
- ports, 2-19, 2-26
 - channels and, 2-21 to 2-22
 - creating, 2-21, 6-15
 - deleting, 2-21
 - editing, 2-21
- Ports node, 2-21, 6-15
- Preparser tab, 2-22, 5-14, 6-17
- privileges, 8-1
- procedures, 6-4 to 6-10
- process activities, 5-7
- Process Activities pane, 4-5, 4-7 to 4-9, 4-12, 5-5, 5-9, 5-17 to 5-19
- PROCESS function, 3-5
- Process Manager. *See* BPEL Process Manager
- Process node, 5-9
- processes
 - BPEL, 5-4
 - creating, 5-5
 - inbound, 5-16
 - outbound, 5-2 to 5-12
 - synchronous, 5-4
- Processing Log table, A-1 to A-2
- projects, 4-2 to 4-10
- properties, 3-3
- Protocol list, 2-20 to 2-22, 5-13, 6-15 to 6-16
- Publish Wizard dialog box, 6-19
- publishing adapter log files, 6-24
- publishing events, 6-19

Q

- queues, 1-3

R

- ra.xml file, 2-2
- Receive activities, 5-7, 5-19
- Receive dialog box, 5-19
- record identifiers, 2-24
- record types, 3-5
- records

- creating, 3-5
- processing, 7-3
- Reply activities, 5-9
- repositories, 6-2, 6-17
 - configuring, 2-5 to 2-6
 - migrating, 8-8 to 8-10
- Repository Driver parameter, 2-5
- repository information, 2-5
- repository migration parameters, 8-9
- repository parameters
 - Driver, 2-5
 - Password, 2-5
 - Pooling, 2-5
 - Type, 2-5
 - URL, 2-5
 - User, 2-5
- Repository Password parameter, 2-5
- Repository Pooling parameter, 2-5
- repository projects
 - creating, 2-7 to 2-8
 - Web services and, 2-7
- Repository tab, 2-10
- repository tables, 2-6
- Repository Type parameter, 2-5
- Repository URL parameter, 2-3, 2-5
- repository URLs, 8-10
- Repository User parameter, 2-5
- repository.xml file, 8-11
- request documents, 1-2, B-1 to B-3, B-11, B-13
- request DTDs, 6-7
- Request Schema tab, 2-13
- request schemas, 2-13 to 2-14
- request-response services, 4-15, 4-19
 - creating, 5-2 to 5-12
- resource adapters, 1-1, 1-6, 3-1
- Resource Execution policy type, 8-1
- response documents, 1-2, B-1, B-6, B-13 to B-17
- response DTDs, 6-7
- Response Schema tab, 2-14
- response schemas, 2-13 to 2-14
- RMI disposition, 2-20, 6-15
- root elements, 6-3, 6-7, 6-20
- runtime, 5-10, 6-21, 8-8
 - configuring, 5-1, 6-1, 6-12
- runtime service adapter connections, 3-4

S

- sample files, B-1 to B-17
 - multiple-function requests, B-1 to B-2
 - purchase order, B-3 to B-6
 - sales order, B-11 to B-17
 - single-function requests, B-1 to B-2
- scenarios
 - integration, 5-1, 6-1
- Schema style parameter, 5-14, 6-17
- schemas, 1-2
 - creating, 2-13 to 2-14
- security, 8-1 to 8-8
 - Application Explorer and, 8-1, 8-6

- configuring, 8-2
- mapping, 3-5
- Security node, 8-2 to 8-5, 8-7
- security parameters
 - Admin Password, 2-4
 - Admin User, 2-4
 - Policy, 2-4
- security policies, 8-1, 8-4
- Security Policy option, 8-6
- Selected list, 8-4 to 8-5
- sequence numbers, A-2
- Server IP address parameter, 2-11, 5-14, 6-17
- server name, 2-11
- Server Port parameter, 2-11, 5-14, 6-17
- service adapter connections, 3-4
- Service Contract date, 7-3
- service integration, 5-2 to 5-12
 - verifying, 6-12
- service names, 2-17
- Service Provider list, 2-7 to 2-8
- Service-Oriented Architecture (SOA), 4-1
- services, 1-1
 - creating, 2-17 to 2-18
 - testing, 2-18
- servlets, 3-1
 - WSDL, 4-6, 4-13, 5-18
- Single (Computer) option, 8-7
- single-function requests, B-1 to B-2
- SOA (Service-Oriented Architecture), 4-1
- SOAP agents, 7-5
- SOAP envelopes, 8-9
- SOAP faults, 7-5
- soap operation name dialog box, 8-9
- SOAP requests, 7-5 to 7-8, 8-1, 8-6
 - creating, 8-8
 - errors and, 7-5 to 7-6, 7-8
- SOAP responses, 7-5 to 7-8
- software reuse, 6-1
- SQL scripts, 6-11
- starting channels, 6-17, 6-21
- starting iStudio, 6-18
- starting repositories, 6-17
- storing metadata, 8-8
- Synchronization Type list, 5-13, 6-16
- Synchronization Type parameter, 2-22
- synchronous access, 1-3
- synchronous callbacks, 4-7
- synchronous processes, 5-4
- system parameters
 - Adapter Lib Directory, 2-4
 - Debug Level, 2-4
 - Encoding, 2-4
 - Language, 2-4
 - Number of Async. Processors, 2-4
- system settings, 2-3 to 2-5

T

- target systems, 7-5
- Target Type list, 2-10

- targets
 - connecting to, 2-9 to 2-12
 - defining, 2-9 to 2-11
 - deleting, 2-13
 - disconnecting from, 2-12
 - editing, 2-12
- TCP Listener dialog box, 2-22
- Template list, 4-12, 5-5, 5-17
- ThinNet API, 1-4, 1-7, 2-13, B-1
- third-party applications, A-2
- trace information, 7-1
- trace settings, 2-26
- trans section of iwoevent.cfg file, 2-25
- transaction processing, 1-1, A-1 to A-2
- transaction tables, 1-4
- Transaction Type field, A-2
- transactions
 - calling, 4-15, 4-19
 - storing, 2-5
- triggering events, 6-17
- troubleshooting, 7-1 to 7-11
 - Application Explorer, 7-1 to 7-2
 - BSE, 7-4 to 7-11
 - Web services, 7-4 to 7-11
- Type list, 8-5, 8-7

U

- updating adapter configuration, 3-2
- URL field, 2-20
- User id parameter, 2-2, 2-11 to 2-12, 2-22, 5-14, 6-17
- User password parameter, 2-11 to 2-12, 2-22 to 2-23, 5-14, 6-17
- UserName parameter, 3-4 to 3-5, 7-2
- users
 - associating, 8-2
- Users and Groups node, 8-2 to 8-3
- Users node, 8-3

V

- values, 7-3
- variables, 5-9
- verifying event integration, 6-24
- verifying events, 5-23
- verifying mappings, 5-9
- verifying service integration, 6-12
- visual editors, 4-5, 4-12, 5-2, 5-5, 5-17 to 5-18

W

- warning messages, 5-8 to 5-10
- Web Service Inspection Language (WSIL), 4-5, 4-12
- Web service names, 2-17
- Web services, 1-1
 - creating, 2-17 to 2-18
 - delivering, 2-5
 - deploying, 7-5, 8-1
 - integrating, 4-1
 - invoking, 4-5, 4-12
 - migrating, 8-10

- repository projects and, 2-7
- testing, 2-18
- troubleshooting, 7-4 to 7-11
- Web Services Description Language (WSDL), 4-6, 4-13, 5-12, 5-18
 - generating, 5-2, 5-14
- Web services policy-based security, 8-1 to 8-8
- workspaces, 5-4, 5-16
- WSDL (Web Services Description Language), 4-6, 4-13, 5-12, 5-18
 - generating, 5-2, 5-14
- WSDL Chooser dialog box, 4-5, 4-12, 5-6, 5-17, 5-18
- WSDL documents, 4-1
- WSDL File field, 4-6, 4-13, 5-6
- WSDL file location dialog box, 8-8
- WSDL files, 4-1
 - Application Explorer and, 5-12
 - creating, 5-12
- WSDL servlet, 4-6, 4-13, 5-18
- WSIL (Web Service Inspection Language), 4-5, 4-12
- WSIL browser icon, 4-5, 4-12, 5-6, 5-17

X

- XDJdeOutboundAgent, 2-24
- XML documents, 1-2, B-1
- XML files, 2-2, 8-11
- XML format, 1-3
- XML messages, 1-1 to 1-2
- XML schemas, 1-2
 - creating, 2-13 to 2-14
 - storing, 2-8
- XML support, A-2 to A-3
- XMLInterop parameter, 2-11, 5-14, 6-17

Z

- Z files, 2-24
 - accessing, B-1