

StorageTek LibraryStation

Configuration and Administration Guide

Version 6.2



June 2010
Revision B

Submit comments about this document by clicking the Feedback [+] link at: <http://docs.sun.com>

Copyright © 2007, 2010, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related software documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation shall be subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License (December 2007). Oracle USA, Inc., 500 Oracle Parkway, Redwood City, CA 94065.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications which may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure the safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. UNIX is a registered trademark licensed through X/Open Company, Ltd.

This software or hardware and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

Contents

Preface xi

Related Documentation xii

Documentation, Support, and Training xiii

Oracle Welcomes Your Comments xiii

Additional Information xiv

 Customer-initiated Maintenance xiv

 Conventions for Reader Usability xv

What's New? xxi

Revision B xxi

Revision A xxi

1. Introduction 1

What is LibraryStation? 1

How Does LibraryStation Work? 2

 Request Processing 3

2. Configuration 5

Overview 5

Typical Configurations 6

 LibraryStation Client/Server Environments 10

Verifying Software and Hardware Requirements 14

 Software Requirements 14

 Hardware Requirements 15

Configuring Communication Facilities 16

 ONC/RPC Support 16

LU6.2 Support	17
Configuring Security Measures	21
Drive Access Security	21
Volume Access Security	21
Allocating the Persistent Data File	35
The PDF in a Multiple Host Environment	36
Configuring the LibraryStation Hostid	37
Configuring Drive Device Numbers	39
Configuring the LSINIT Control Statement	44
LSINIT Control Statement Format	44
Required Keyword Parameters of LSINIT	48
Optional Keyword Parameters of LSINIT	50
LSINIT Implications for Multiple MVS Host Installations	56
Configuring the LSDEF Data Set	58
Defining LSDEF File Statements	58
CLIENTID Statement	59
SPNUM Statement	60
Allocating the LSDEF Data Set	61
Configuring the HSC Started Task Procedure	62
Reconfiguring the HSC LIBGEN	64
Verifying LibraryStation Configuration	65
Step 1: CPA, TCP/IP, and LAN Verification	65
Step 2: LibraryStation Verification	65
3. Commands	67
Overview	67
Relationship to HSC Commands	68
LibraryStation Command Summary	69
Online Help for LibraryStation Commands	70
Operating States	70
Command Descriptions	71
Activate Standby Command	71
Cancel Command	72
CLrlock Command	73

Display CMd Command	75
Display DRive Command	76
Display Request Command	79
Display Status Command	81
Idle Command	82
INit Command	84
SEt Command	86
Start Command	88
STOp Command	89
Trace Command	91
Vary DRive Command	96

4. Administration and Maintenance 99

System Administration	99
Making Additional Tape Cartridge Drives Available to LibraryStation	100
Making Existing Tape Cartridge Drives Unavailable to LibraryStation	102
Modifying LibraryStation Operating Characteristics	103
LibraryStation Diagnostic Tools	104
Logging	104
Tracing	105
SLGDIAG Installation Verification Program	106
Network Diagnostic Tools	111
LibraryStation Failure Recovery	111
Persistent Data File (PDF) Failure Recovery	112
Dynamic Server Switching	115
Cross Host Recovery	115

5. Starting and Stopping LibraryStation 117

Starting LibraryStation	117
Stopping LibraryStation	118

6. Messages and Codes 119

Overview	119
Message Format	120
Message Descriptions	120

Variable Definitions	121
Message Listing	122
Abend Reason Codes	171
System Return Codes	171
Remote Procedure Call (RPC) Messages	174
A. Configuration Worksheet	177
B. Message Change Summary	183
New Messages	183
Changed Messages	183
Deleted Messages	183
C. Migration and Coexistence	185
Migration	185
Coexistence	185
Compatibility With MVS/CSC	186
D. Gathering Diagnostic Materials	187
LibraryStation Diagnostic Materials	187
Tape Format	187
Glossary	189
Index	205

Figures

FIGURE 1-1	Flow of Requests and Responses through LibraryStation	4
FIGURE 2-1	Typical LibraryStation Configuration for ONC/RPC Clients	7
FIGURE 2-2	Typical LibraryStation Configuration for LU6.2 Clients	8
FIGURE 2-3	Typical LibraryStation Sysplex Configuration	9
FIGURE 2-4	Heterogeneous Environment	10
FIGURE 2-5	Sysplex Environment	11
FIGURE 2-6	Sysplex Environment with Heterogeneous Support	12
FIGURE 2-7	Sample VTAM Setup APPL Statement	18
FIGURE 2-8	Sample APPC Side Information File - Part 1	19
FIGURE 2-9	Sample APPC Side Information File - Part 2	20
FIGURE 2-10	Sample SLILIBRY Macro with LibraryStation Hostid	37
FIGURE 2-11	Sample LIBGEN with LibraryStation Device Numbers	41
FIGURE 2-12	LSINIT Control Statement Syntax	47
FIGURE 2-13	Sample LSDEF Data Set Allocation	61
FIGURE 2-14	Sample HSC Cataloged Procedure Updated for LibraryStation	62
FIGURE 4-1	Sample SYSLOG Output	104
FIGURE 4-2	JCL for SLGDIAG Installation Verification Program	107
FIGURE 4-3	JCL for Rebuilding PDF Indexes	113
FIGURE 4-4	JCL for Redefining the PDF	114

Tables

TABLE 2-1	Command to Application Name Cross Reference	31
TABLE 2-2	LSINIT Keyword Parameters	45
TABLE 3-1	LibraryStation Operator Command Summary	69
TABLE 6-1	Variable Data Definitions	121
TABLE 6-2	Abend Reason Codes	171
TABLE 6-3	System Return Codes	171

Preface

This publication provides configuration and administration information for Oracle's StorageTek LibraryStation software. It is intended for storage administrators, system programmers and operators responsible for configuring and maintaining LibraryStation.

Related Documentation

The following list contains the names of publications that provide additional information about LibraryStation.

The documentation is available online at:

<http://docs.sun.com>

Oracle's StorageTek Nearline Control Solution (NCS)

- *NCS Installation Guide*
- *NCS User Exit Guide*
- *NCS/VTCS XML Guide*

Oracle's StorageTek Host Software Component (HSC)

- *HSC Configuration Guide*
- *HSC Operator's Guide*
- *HSC System Programmer's Guide*
- *HSC Messages and Codes Guide*

Oracle's StorageTek MVS Client System Component (MVS/CSC)

- *MVS/CSC Configuration Guide*
- *MVS/CSC Operator's Guide*
- *MVS/CSC System Programmer's Guide*
- *MVS/CSC Messages and Codes Guide*

Oracle's StorageTek Virtual Tape Control System (VTCS)

- *Beyond the Basics - VTCS Leading Edge Techniques*
- *Installing and Configuring VTCS*
- *Introducing VTCS*
- *Managing VTCS*
- *VTCS Messages and Codes Guide*
- *VTCS Command and Utility Reference*

IBM JES3

- *MVS/ESA JES3 Initialization and Tuning Reference*
- *OS/390 JES3 Initialization and Tuning Reference*

Documentation, Support, and Training

Function	URL
Oracle Home	http://oracle.com
Documentation	http://docs.sun.com
Support	http://www.sun.com/support
Training	http://www.oracle.com/global/us/education/sun_select_country.html

Oracle Welcomes Your Comments

Oracle is interested in improving its documentation and welcomes your comments and suggestions. Submit your comments by clicking the Feedback link at:

<http://docs.sun.com>

Additional Information

Customer-initiated Maintenance

Customer-initiated maintenance begins with a telephone call from you to Oracle StorageTek Support. You receive immediate attention from qualified Oracle personnel, who record problem information and respond with the appropriate level of support.

To contact Oracle StorageTek Support about a problem:

1. Use the telephone and call:

☎ 800.872.4786 (1.800.USA.4SUN) (inside the United States)

☎ 800.722.4786 (Canada)

For international locations:

<http://www.sun.com/contact/support.jsp>

2. Describe the problem to the call taker. The call taker will ask several questions and will either route your call to or dispatch a support representative.

If you have the following information when you place a service call, the process will be much easier:

Account name	_____
Site location number	_____
Contact name	_____
Telephone number	_____
Equipment model number	_____
Device address	_____
Device serial number (if known)	_____
Urgency of problem	_____
Fault Symptom Code (FSC)	_____
Problem description	_____

Conventions for Reader Usability

Typographic

Some JCL examples in this guide include *italic* type. Italic type is used to indicate a variable. You must substitute an actual value for these variables.


The use of mixed upper and lower case characters for commands, control statements, and parameters indicates that lower case letters may be omitted to form abbreviations. For example, you may simply enter POL when executing the POLicy command.

Syntax Flow Diagrams

Syntax flow diagramming conventions include the following:


Flow Lines

Syntax diagrams consist of a horizontal base line, horizontal and vertical branch lines, and the text for a command, control statement, macro, or utility. Diagrams are read left to right, and top to bottom. Arrows indicate flow and direction.

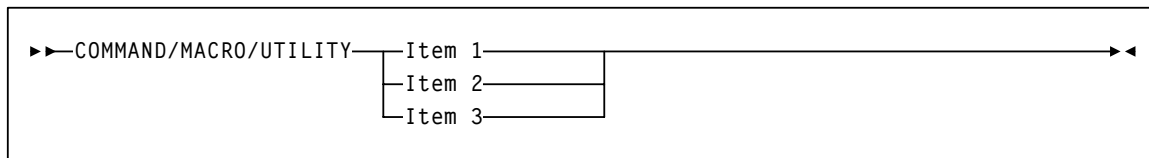


Single Required Choice

Branch lines (without repeat arrows) indicate that a single choice must be made. If one of the items to choose from is positioned on the baseline of the diagram, one item must be selected.

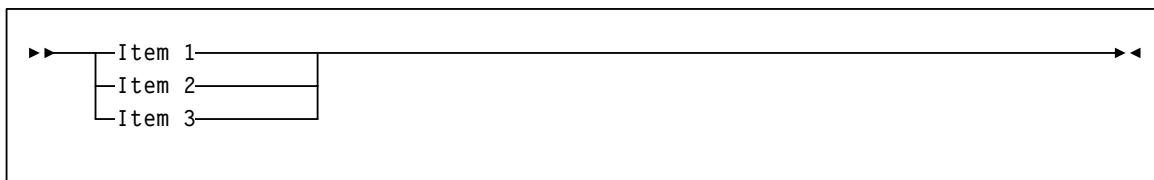


Single Optional Choice

If the first item is positioned on the line below the baseline, one item may be optionally selected.

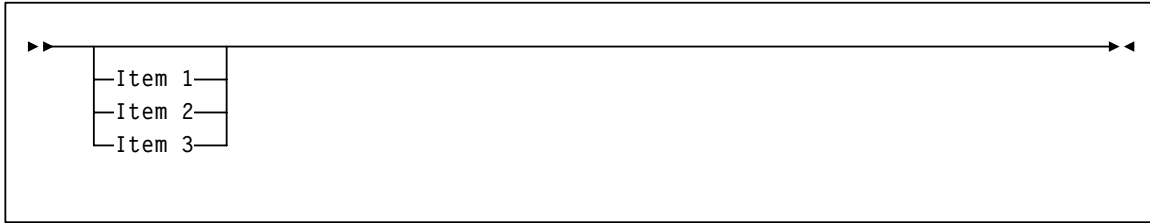


Defaults

Default values and parameters appear above the baseline.

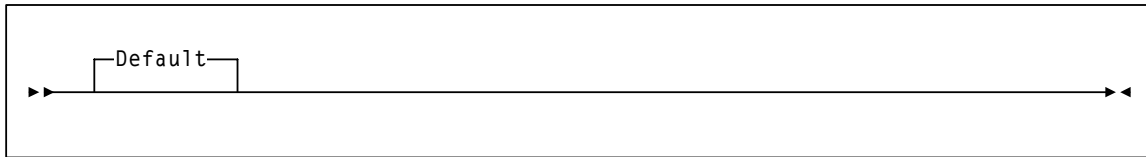


Some keyword parameters provide a choice of values in a stack. When the stack contains a default value, the keyword and the value choices are placed below the baseline to indicate that they are optional, and the default value appears above the keyword line.

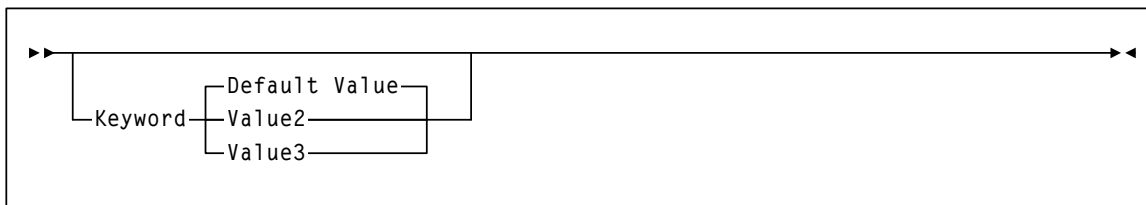

Repeat Symbol

A repeat symbol indicates that more than one choice can be made or that a single choice can be made more than once. The following example indicates that a comma is required as the repeat delimiter.

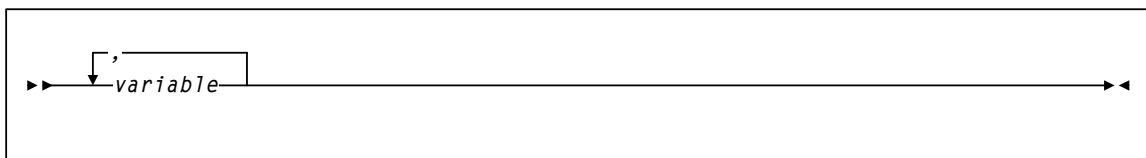

Keywords

All command keywords are shown in all upper case or in mixed case. When commands are not case sensitive, mixed case implies that the lowercase letters may be omitted to form an abbreviation.

Variables

Italic type is used to indicate a variable.

Alternatives

A bar (|) is used to separate alternative parameter values.

Optional

Brackets [] are used to indicate that a command parameter is optional.

Delimiters

If a comma (,), a semicolon (;), or other delimiter is shown with an element of the syntax diagram, it must be entered as part of the statement.

Ranges

An inclusive range is indicated by a pair of elements of the same length and data type, joined by a dash. The first element must be strictly less than the second element.

A hexadecimal range consists of a pair of hexadecimal numbers (for example, 0A2-0AD, or 000-0FC).

A decimal range consists of a pair of decimal numbers (i.e., 1-9, or 010-094). Leading zeros are not required. The decimal portion is referred to as an incremental range. The character positions of the incremental portion of both range elements must match, and the non incremental characters of the first element must be identical to those of the second element.

A numeric VOLSER range (*vol-range*) consists of a pair of VOLSER elements containing a decimal numeric portion of 1 to 6 digits (for example, ABC012-ABC025, or X123CB-X277CB). The decimal portion is referred to as an incremental range. The following additional restrictions apply:

- The character positions of the incremental portion of both range elements must match.
- The non incremental characters of the first element must be identical to those of the second element.
- You cannot increment two portions of a range element. If 111AAA is the first element, you cannot specify 112AAB for the second element.

- If a VOLSER range contains more than one decimal portion, any portion is valid as the incremental range. For example:

A00B00 the largest range that can be specified is A00B00 through A99B99.
A0B0CC the largest range that can be specified is A0B0CC through A9B9CC.
000XXX the largest range that can be specified is 000XXX through 999XXX.

An alphabetic VOLSER range (*vol-range*) consists of a pair of VOLSER elements containing an incremental portion of 1 to 6 characters (for example, 000AAA-000ZZZ, or 9AAA55-9ZZZ55). This portion is referred to as an incremental range. The following additional restrictions apply:

- The character positions of the incremental portion of both range elements must match.
- The non incremental characters of the first element must be identical to those of the second element.
- You cannot increment two portions of a range element. If 111AAA is the first element, you cannot specify 112AAB for the second element.
- The alphabetic portion of the VOLSER range is defined as being from character A to Z. To increment multi-character sequences, each character increments to Z. For instance, ACZ is part of the AAA-AMM range. Examples are:

A00A0-A99A0 increments VOLSERs A00A0 through A09A0, then A10A0 through A99A0.
9AA9A-9ZZ9A increments VOLSERs 9AA9A through 9AZ9A, then 9BA9A through 9ZZ9A.
111AAA-111ZZZ increments VOLSERs 111AAA through 111AAZ, then 111ABA through 111ZZZ
999AM8-999CM8 increments VOLSERs 999AM8 through 999AZ8, then 999BA8 through 999CM8
A3BZZ9-A3CDE9 increments VOLSERs A3BZZ9 through A3CAA9, then A3CAB9 through A3CDE9
AAAAAA-AAACCC increments VOLSERs AAAAAA through AAAAAZ, then AAAABA through AAACCC
CCNNN-DDDNNN increments VOLSERs CCNNN through CCCNNZ, then CCCNOA through DDDNNN *

* **Caution:** This is a very large range.

The number of volumes in an alphabetic VOLSER range depends on the number of elements in the incrementing portion of the VOLSER range. For an A to Z range in each character position, the number of volumes can be calculated by 26 to the power of the number of positions that are being incremented.

A-Z	26^1	26
AA-ZZ	26^2	676
AAA-ZZZ	26^3	17,576
AAAA-ZZZZ	26^4	456,976
AAAAA-ZZZZZ	26^5	11,881,376
AAAAAA-ZZZZZZ	26^6	308,915,776

Lists

A list consists of one or more elements. If more than one element is specified, the elements must be separated by a comma or a blank space, and the entire list must be enclosed in parentheses.

Blanks

Keyword parameters and values may be separated by any number of blanks.

Control Statements

The standard syntax conventions for control statements are as follows:

- The only valid control statement information area is from column 1 to column 72. Columns 73-80 are ignored.
- Parameters may be separated by one or more blanks or a comma.
- A value is associated with a parameter by an equal (=) sign or by enclosing the value in parentheses, and concatenating it immediately after the parameter.
- Case (upper or lower) is ignored in actual control statements.
- Continuations are supported by including a plus (+) sign at the end of the line to be continued. A control statement is terminated if the statement is not continued.
- /* and */ can be used to enclose comments in the job stream. Comments can be continued over multiple lines, but cannot be nested.

PARMLIB members **must** include a /*...*/ comment as the **first** control statement. Otherwise, the old format is assumed. Comments in the old format must begin with an asterisk (*) in column 1.

For definition data sets (e.g., VOLATTRs, UNITATTRs and TAPEREQs), comments **must** be in the new format (/*...*/).

- Asterisk (*) comments are **not** allowed.
- A /*...*/ comment in the first line is **not** required.
- The maximum length for a control statement is 1024 characters.

What's New?

LibraryStation Release 6.2 includes the following enhancements:

Revision B

This revision contains minor technical updates and corrections.

Revision A

Enhancement	Primary Location
Message changes and additions.	Appendix B, "Message Change Summary"

Introduction

What is LibraryStation?

LibraryStation provides a communications interface between HSC and a client system running on another host (either MVS or open systems), allowing network clients to access the library services of a StorageTek Nearline Automated Cartridge System (ACS) through the MVS host system. LibraryStation can communicate with the MVS/CSC in an MVS-only environment, or the SMC and the StorageTek HTTP server can provide communication between MVS hosts. LibraryStation executes in the HSC address space on MVS.

LibraryStation provides software support and an interface for the Open Systems Nearline Network protocol. This includes an Open Network Computing Remote Procedure Call (ONC/RPC) client, a System Network Architecture (SNA LU6.2) client, and an MVS cross-system coupling facility (XCF) client. This protocol defines valid requests from network client systems and corresponds to an application layer protocol of the International Standards Organization (ISO) Open Systems Interconnection (OSI) reference model.

Additionally, LibraryStation provides an operator command set for controlling LibraryStation operation through the HSC operator console.

How Does LibraryStation Work?

LibraryStation acts as a control path interface between client systems and the HSC. Client systems communicate with LibraryStation through two methods. Open Systems Nearline Network protocol requests and corresponding replies are processed by the Client System Interface (CSI) for ONC/RPC clients or the Client Server Communications Interface (CSCI) for SNA LU6.2 and XCF clients of LibraryStation.

A hardware and software connection between the MVS system and network is required:

- For ONC/RPC clients:
 - The hardware connection is provided by a network interface adaptor that converts data on the Ethernet network to IBM channel commands. Depending on the TCP/IP communication product you choose, several types of network interface adapters may be used for a connection to an Ethernet network. Consult your TCP/IP vendor for a list of supported network adapters.
 - The software connection is provided by one of various TCP/IP communication products including IBM TCP/IP and CA Insinuator TCPaccess Communications Server. These products translate the data to a format that is understood by MVS applications such as LibraryStation.
- For SNA LU6.2 clients:
 - The hardware necessary to provide network connectivity between the client system and LibraryStation is not provided by Oracle. Typical configurations use an IBM 3172 or IBM 3174 Interconnect Controller to connect to a token ring network where the client system is also attached. It is also possible to use channel-to-channel connections where the client resides on another MVS system.
 - The software connection is provided by APPC/MVS and VTAM. APPC/MVS provides a programming interface to LibraryStation while VTAM controls the physical hardware.
- For XCF clients:
 - XCF support runs in MVS 5.2.2 or above, executing as a sysplex environment. To use XCF, and for sysplex itself, you must have a coupling facility (CF) or a channel-to-channel (CTC) device.

When a client system makes a library services request, such as a mount or dismount request, LibraryStation translates the request into a format that the HSC understands. The HSC in turn delivers the request to the Library Management Unit (LMU) through the use of an establishment controller (an IBM 3174, for example) just as if the request had originated from the HSC.


When the HSC needs to respond to the originator, LibraryStation translates the response from the HSC format to the format expected by the client system. After a cartridge is mounted using this control path sequence, the client system can begin moving data to or from a cartridge drive that is attached to the library and connected directly to the client system. This separate data path uses a channel that is supported by the client; an ESCON, FIPS-60 "Bus and Tag," or SCSI channel.

Request Processing

The flow of requests and responses between the network client system and the Library Management Unit (LMU) of the ACS is described below. Communications occur through a control path from the client system, through the HSC host to the LMU and back. [FIGURE 1-1 on page 4](#) illustrates the flow of requests and responses. ONC/RPC clients are used in this example.

1. The client system initiates communication with the MVS host by sending an Open Systems Nearline Network (OSNN) protocol request over the network to the network interface adaptor (for example, the StorageTek 9300-001 Control Path Adaptor). This request could specify actions such as a tape volume mount or a query for information.
2. The network interface adaptor passes the packet through the IBM channel to the communication subsystem software on the MVS host, IBM TCP/IP for example.
3. The communication subsystem manages multiple communications connections and directs the communications packet to LibraryStation.
4. LibraryStation interprets the packet's information and protocols. LibraryStation may pass the request to the HSC for further processing and delivery to the LMU, or it may process the request directly.
5. The LMU initiates library operation, including robotic activity.
6. The LMU sends its response to the HSC for further processing and delivery to LibraryStation.
7. LibraryStation interprets the message information and protocols and passes the response to the Communications subsystem.
8. The Communications subsystem provides additional communications information required for the response to be received by the network client and sends the message to the network interface adaptor.
9. The network interface adaptor passes the packet back to the client system through the network (Ethernet, Token Ring, etc.)
10. The client system receives the response message from LibraryStation.
11. Data transfers between the client system and the ACS occur through separate ESCON, FIPS-60 "Bus and Tag" or SCSI data paths.

How Does LibraryStation Work?

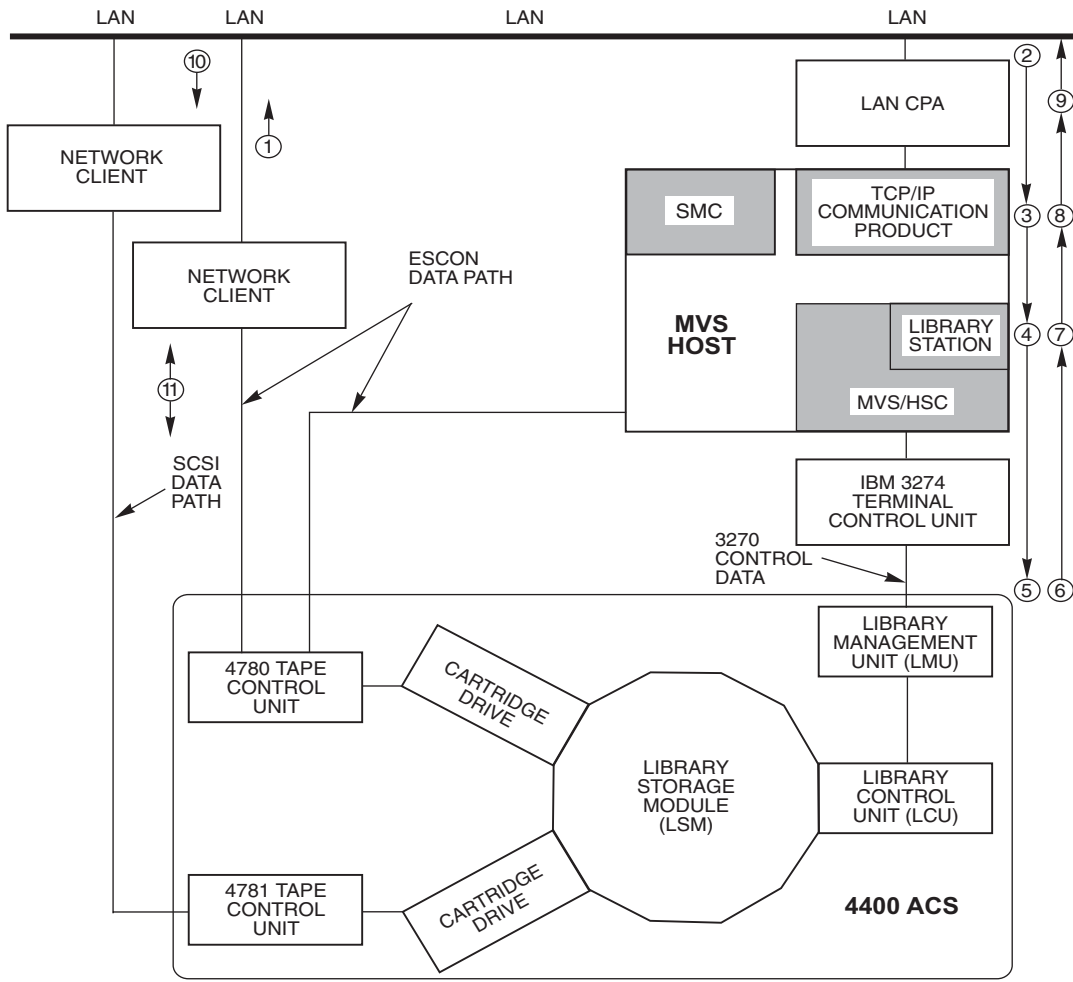

C46255

FIGURE 1-1 Flow of Requests and Responses through LibraryStation

Configuration

Overview

LibraryStation must be installed prior to performing LibraryStation configuration tasks. LibraryStation software is installed from the NCS installation tape onto the MVS host system using the IBM SMP/E utility. Procedures for installing LibraryStation software are contained in the *NCS Installation Guide*.

Note – LibraryStation 6.2 is not a dependent SYSMOD of the HSC base SYSMOD.

Once LibraryStation installation is complete, you must perform the following configuration tasks described in this chapter:

- Verifying Software and Hardware Requirements
- Configuring Communication Facilities
- Configuring Security Measures
- Allocating the Persistent Data File
- Configuring the LibraryStation Hostid
- Configuring Drive Device Numbers
- Configuring the LSINIT Control Statement
- Configuring the LSDEF Data Set
- Configuring the HSC Started Task Procedure
- Reconfiguring the HSC LIBGEN
- Starting LibraryStation
- Verifying LibraryStation Configuration

A configuration worksheet is included in [Appendix A](#). As you complete configuration tasks, record site-specific information on this worksheet.

Typical Configurations


LibraryStation provides the following capabilities that are not found in a normal HSC configuration without LibraryStation:

- The HSC system serves as a conduit for control path communication between network client systems and the ACS system.
- The data path between the Nearline ACS and network client system is independent of the HSC system. Depending on the control unit, the data path can be ESCON, FIPS-60 “Bus and Tag” or SCSI.

LibraryStation functions are made possible with the addition of hardware and software elements that are not present in the normal HSC configuration:


- LibraryStation software for protocol support between the network client system and the HSC host system.
- TCP/IP communications software for ONC/RPC support, APPC/MVS and VTAM for SNA LU6.2 support.
- For ONC/RPC support, a network interface adaptor that provides an IBM channel connection to an Ethernet local area network (LAN). Depending on the TCP/IP communication product you choose, various network interface adapters can be used for this connection. Consult your TCP/IP vendor for a list of supported network adapters.
- For LU6.2 support, many hardware configurations can be used. Typical configurations use an IBM 3172 or 3174 establishment controller to connect to a token ring network.
- For XCF support, a Coupling Facility (CF) or Channel to Channel (CTC) device is required.
- A network client system, such as the StorageTek Client System Component for MVS (MVS/CSC).

Typical LibraryStation configurations are illustrated on the following pages.

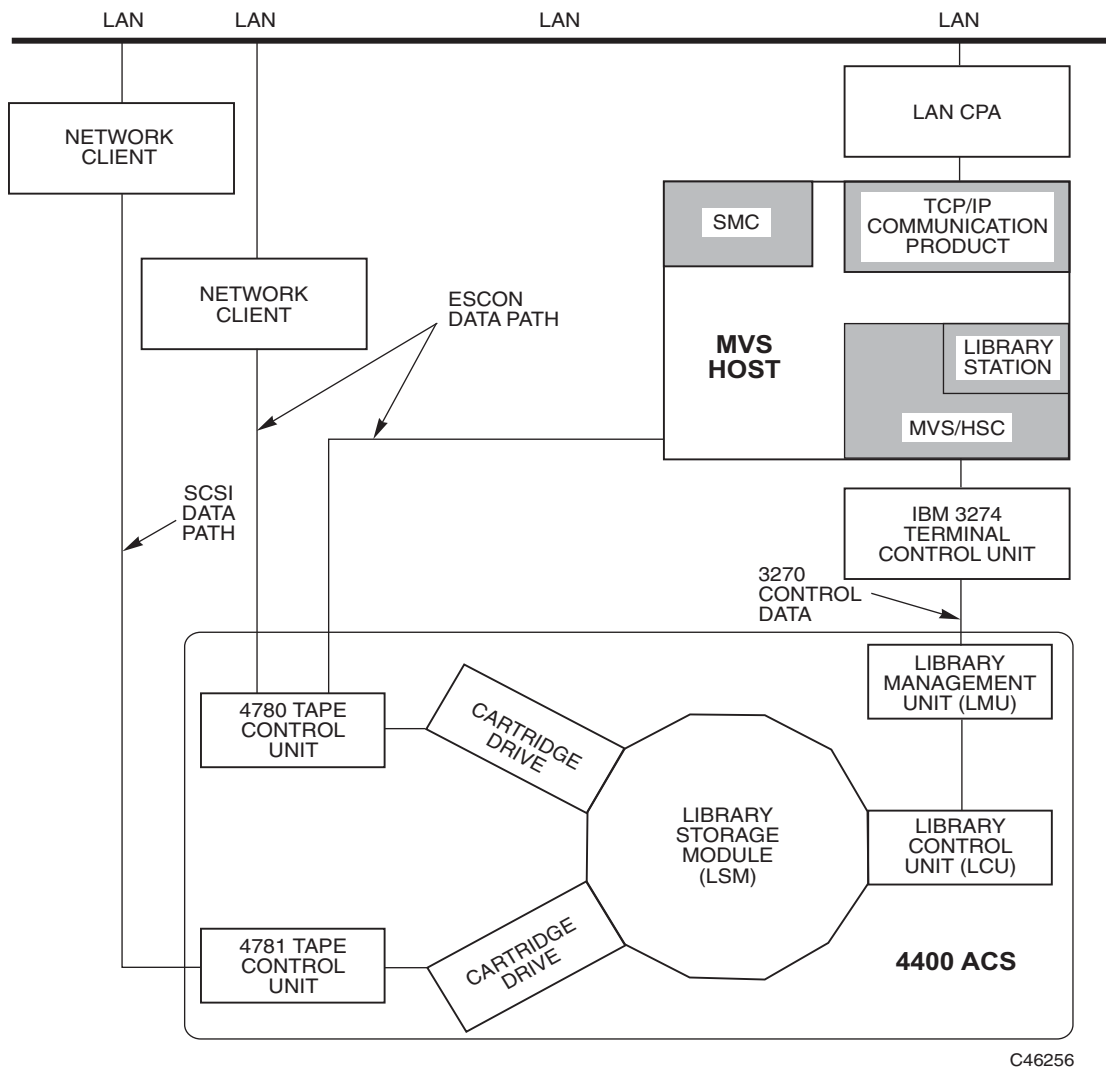


C46256

FIGURE 2-1 Typical LibraryStation Configuration for ONC/RPC Clients

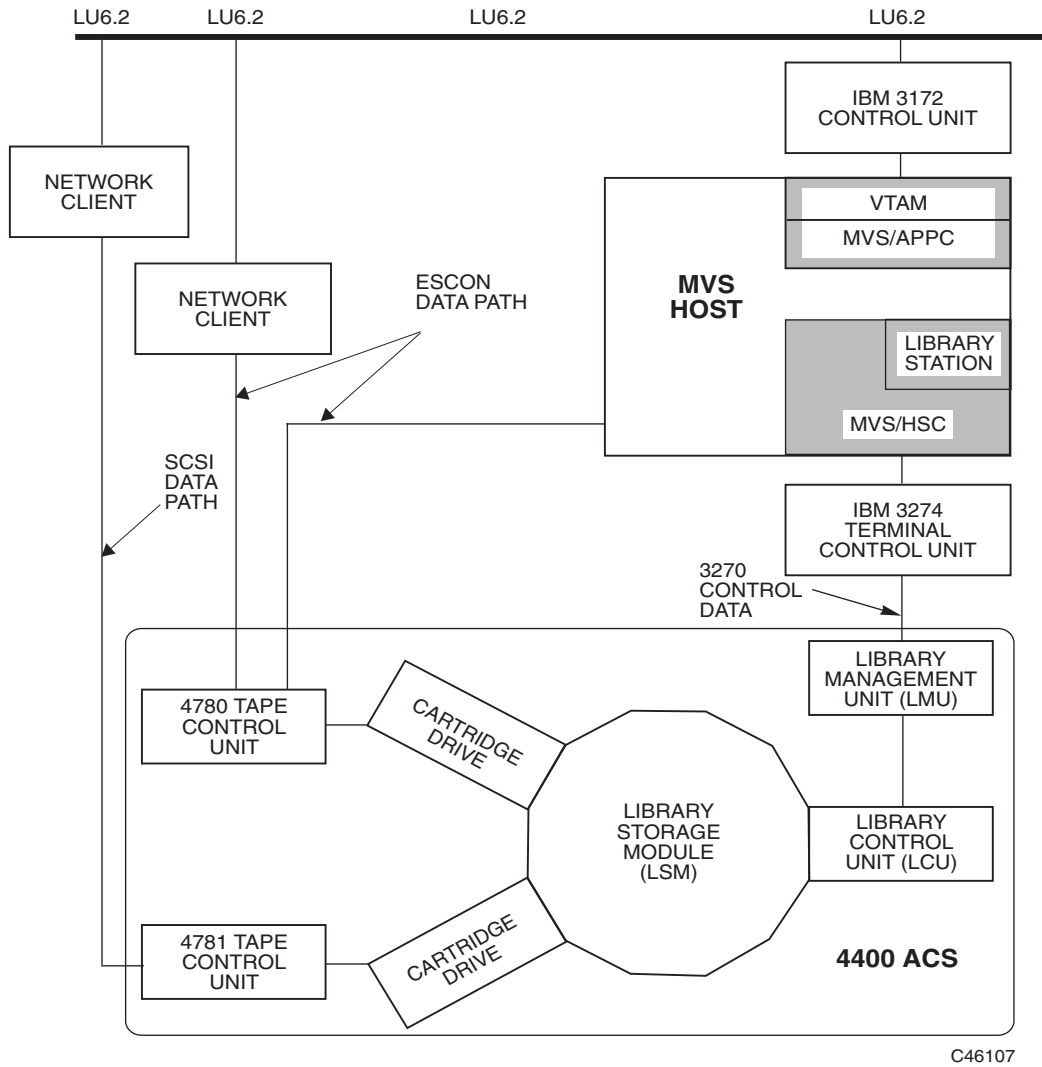

C46107

FIGURE 2-2 Typical LibraryStation Configuration for LU6.2 Clients

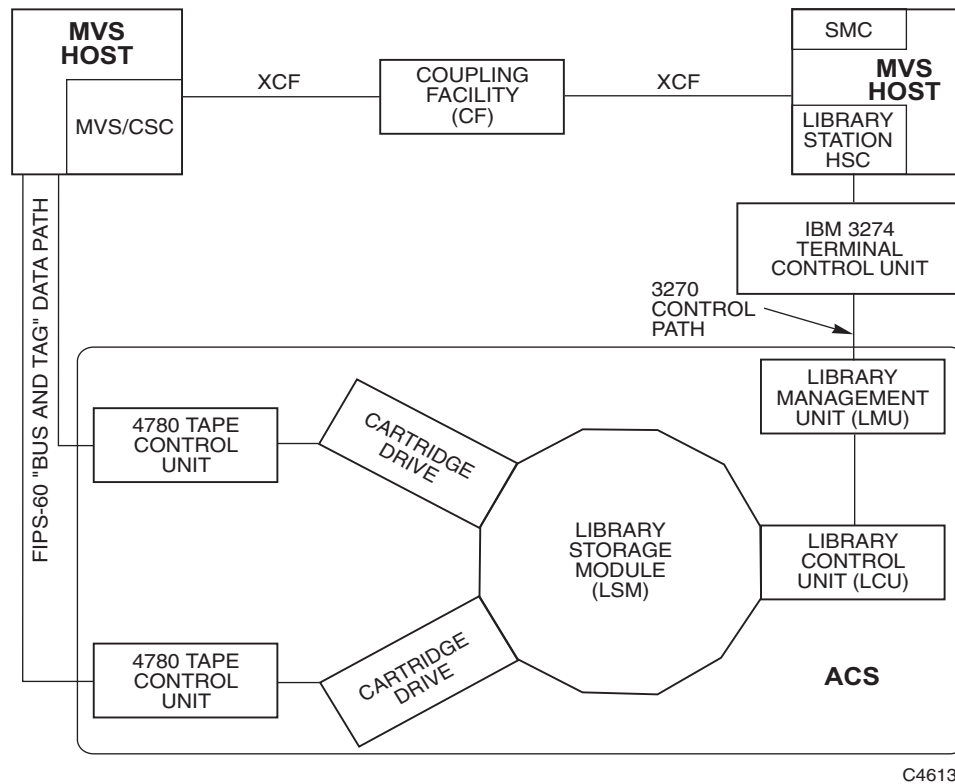

C46139

FIGURE 2-3 Typical LibraryStation Sysplex Configuration

LibraryStation Client/Server Environments


The following sections summarize the various LibraryStation client/server environments:

Heterogeneous Environment

A heterogeneous environment consists of a single LibraryStation server attached to various clients (including MVS/CSC) using RPC, LU6.2, or XCF communication types.

Non-MVS/CSC clients can issue drive and volume locking requests to serialize resources. Drive and volume locking information is stored in the Persistent Data File (PDF), a component of LibraryStation. The PDF is required and must be enabled using one of the two methods described in [“Allocating the Persistent Data File” on page 35](#). To ensure the integrity of the information stored in the PDF, only one LibraryStation server can execute in this environment.

The following figure illustrates this client/server environment:

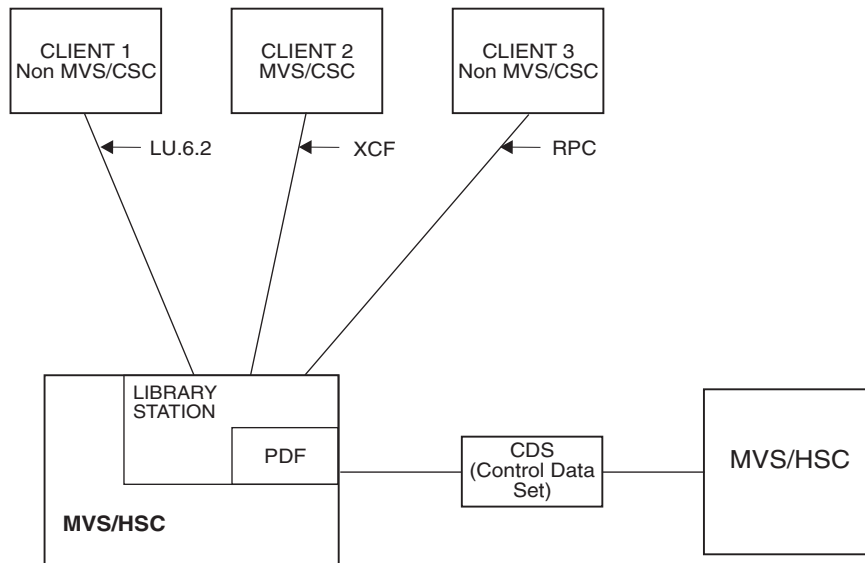

C46257

FIGURE 2-4 Heterogeneous Environment

Sysplex (Homogeneous Environment)

A sysplex, or homogeneous environment consists of a maximum of three LibraryStation servers attached only to MVS/CSC clients using XCF, LU6.2, or RPC communication types.

These MVS/CSC clients utilize Dynamic Server Switching (DSS). Dynamic server switching allows the client to dynamically switch connection to an alternate LCS (Library Control System) when it detects that the current LCS is unavailable. Dynamic server switching is configured for each MVS/CSC client using the MVS/CSC SRVRLIST startup parameter. Refer to the *MVS/CSC Configuration Guide* for more information on dynamic server switching and the SRVRLIST startup parameter.

MVS/CSC clients do not use drive and volume locking. Instead, MVS and related products provide for the sharing and serialization of resources. Thus, a PDF is not needed in this environment and must be disabled for each LibraryStation by specifying the NOPDF keyword in the LSINIT control statement.

The following figure illustrates this client/server environment:

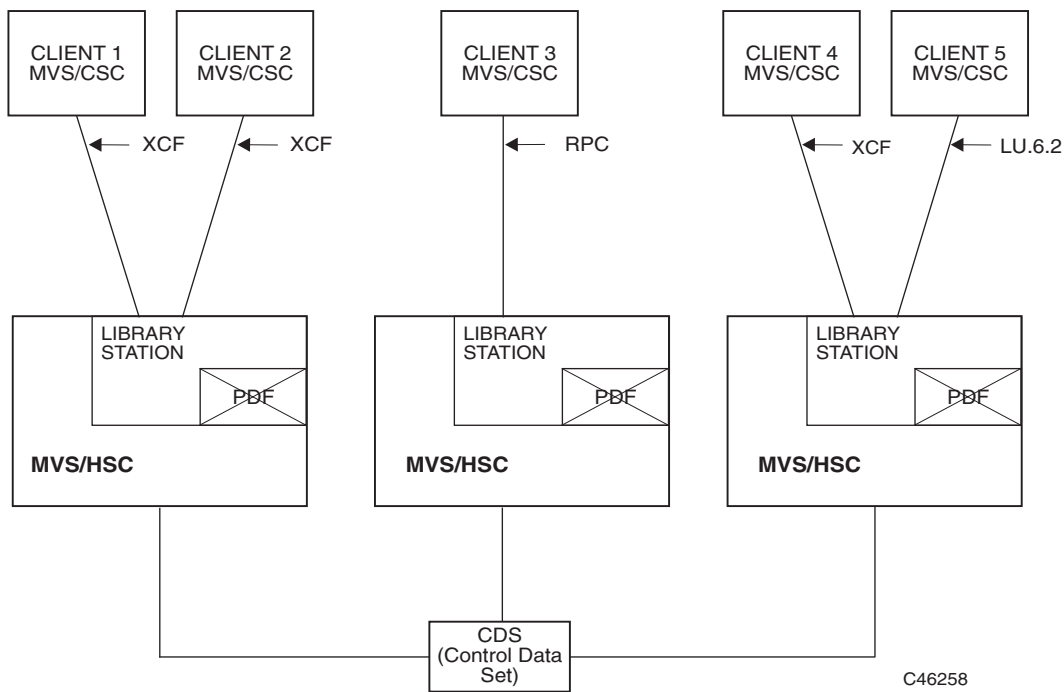


FIGURE 2-5 Sysplex Environment

Sysplex With Heterogeneous Support for Non-MVS/CSC Clients

It is possible to add heterogeneous support for non-MVS/CSC clients within a sysplex environment. This is accomplished by allowing only one LibraryStation to initialize with a PDF. The NOPDF keyword MUST be specified in the LSINIT control statement for all other LibraryStations. Non-MVS/CSC clients must attach to the LibraryStation with the PDF using RPC or LU6.2 communication types. By utilizing the PDF, these clients can issue drive and volume locking requests to serialize resources. MVS/CSC clients do not use drive and volume locking. Instead, MVS and related products provide for the sharing and serialization of resources.

To ensure that the MVS/CSC clients do not compromise the integrity of the information stored in the PDF, any client using volume locking must secure the locked volumes using LibraryStation client volume access. See [“Configuring Security Measures” on page 21](#) for more information.

The following diagram illustrates this client/server environment:

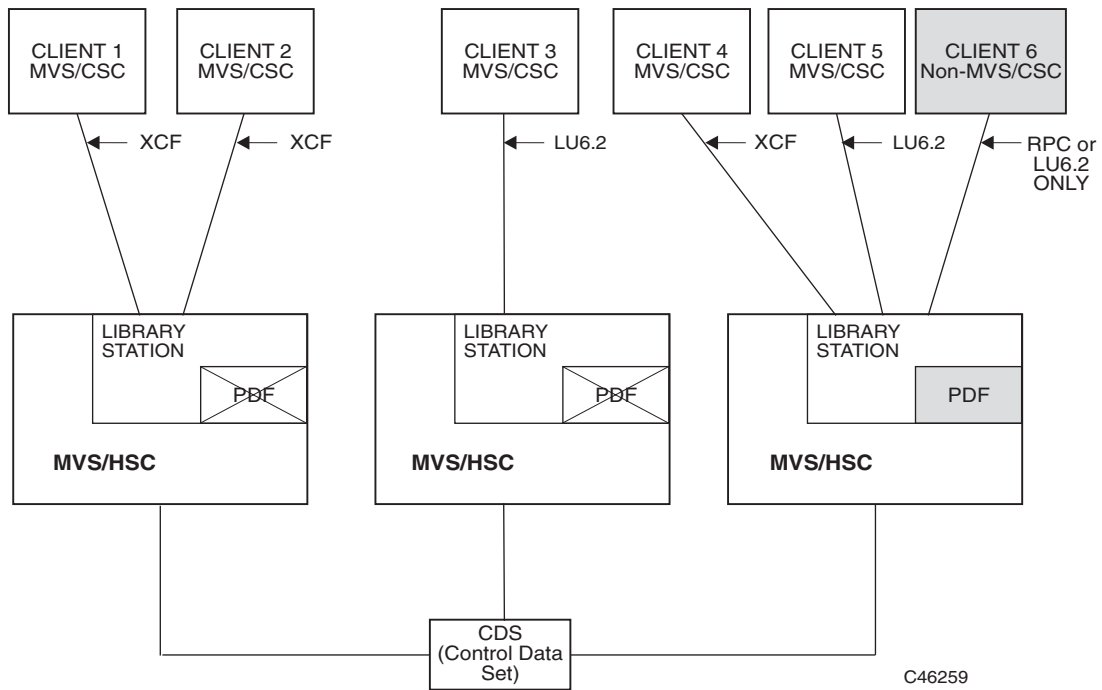


FIGURE 2-6 Sysplex Environment with Heterogeneous Support

C46259

System Redundancy Options

The following applies to heterogeneous LibraryStation installations only; it does not apply to MVS sysplex installations.

For system redundancy in the event of a failure on the MVS host system from which LibraryStation is normally executed, LibraryStation software can be made available to more than one MVS host system attached to the same Nearline ACS library complex.

If the HSC host system fails in this scenario, LibraryStation can be automatically initialized on an alternate host system via a host communication request. Or, LibraryStation can be manually initialized from an alternate host system using the LibraryStation LS INit operator command. See the HOSTID and DEFER parameters in [“Configuring the LSINIT Control Statement” on page 44](#).

LibraryStation software can be made available to multiple hosts either by installing it directly on each host or by installing it on DASD that is shared among the hosts. However, each host that will be capable of initializing LibraryStation must also have the HSC, a communications subsystem, and a network interface adaptor installed. The initializing hosts must also access a common PARMLIB data set.

Verifying Software and Hardware Requirements

Software Requirements

LibraryStation software requirements include the following:

Category	Supported Software
Operating system	MVS (All IBM-supported versions of z/OS) (JES2 and JES3 environments)
Required software	<ul style="list-style-type: none"> ■ LibraryStation 6.2 ■ HSC 6.2
Optional supporting software (can be installed at any time before or after LibraryStation software is installed)	<ul style="list-style-type: none"> ■ Tape Management System (TMS) that implements management of tape pools (for example, CA-1) ■ System Authorization Facility (SAF) security system that checks LibraryStation requests for authorization using the IBM MVS RACROUTE request facility (for example, RACF)
TCP/IP communications	<ul style="list-style-type: none"> ■ IBM TCP/IP Release 3.1 or higher ■ CA Unicenter TCPAccess Communications Server Release 5.0 or higher ■ CA Unicenter TCPAccess X.25 Server Release 1 or higher
SNA LU 6.2 communications	<ul style="list-style-type: none"> ■ IBM ACF/VTAM Release 3.4.2 or higher ■ IBM APPC/MVS communication services
XCF communications	IBM XCF Services
HSC Server System Communications	<ul style="list-style-type: none"> ■ IBM ACF/VTAM Release 3.4.2 or higher. ■ LMU Microcode Release 1.5.x or higher is required for multiple-level host-to-host communications.

Note –

- TCP/IP, SNA LU 6.2, or XCF is required for communication when using MVS/CSC with HSC and LibraryStation in a client/server environment.
- If you are using TCP/IP for communication between HSC/LibraryStation and the MVS/CSC, the TCP/IP Portmapper **must** be active on both the server and client.

Verify that all required software packages are installed and check off each installed component on the LibraryStation Configuration Worksheet in [Appendix A](#).

Hardware Requirements

LibraryStation hardware requirements include the following:

Category	Supported Hardware
Processor	IBM or compatible processor running MVS (any IBM-supported version of z/OS)
StorageTek Nearline Automated Cartridge System (ACS) library hardware	Refer to the <i>NCS Installation Guide</i> .
Communications	<ul style="list-style-type: none"> ■ For installations using a TCP/IP communications product such as IBM TCP/IP or CA Unicenter TCPaccess Communications Server, a network interface adapter is required. Consult your TCP/IP vendor for a list of supported network adapters. ■ For installations using APPC/MVS, the network hardware that provides connectivity to the client must be installed. This hardware is not provided by Oracle. Typical configurations might use an IBM 3172 or IBM 3174 Interconnect Controller to connect to a token ring network. Channel-to-channel connections are also possible; essentially, any connection that VTAM supports can be used. ■ For installations using XCF, a Coupling Facility (CF) or a Channel to Channel (CTC) device.

Verify that all required hardware packages are installed and check off each installed component on the LibraryStation Configuration Worksheet in [Appendix A](#).

Configuring Communication Facilities

Based on the type of client systems LibraryStation will support, various communications facilities must be installed. This chapter contains information regarding installation and configuration of these facilities.

ONC/RPC Support

A TCP/IP communications product, such as IBM TCP/IP or CA Unicenter TCPAccess Communications Server, must be installed for LibraryStation to support ONC/RPC clients. Consult your TCP/IP vendor for specific installation procedures.

Domain Name Resolution

If you are using IBM TCP/IP for TCP/IP communications, the SAS/C socket library uses the following procedure to resolve host names and addresses:

Note – If you are using CA Unicenter TCPAccess TCP/IP products, the following procedure does not apply. Contact your CA TCPAccess Network Administrator.

1. The SAS/C socket library looks for the ETC.RESOLV.CONF data set. If this data set is not found, the SAS/C socket library looks for the TCPIP_PREFIX.ETC.RESOLV.CONF data set; the MVS data set equivalent to /etc/resolv/conf.
 - If it finds either of these data sets, the socket library performs the requested queries through the resolver and returns any answer it receives.
 - If no answer is received, the socket library performs the actions in step 3, below.
 - If neither data set is found, the socket library performs the actions in step 2, below.
2. It looks for the data set in the format of the IBM TCPIP.DATA data set.
 - If the NSINTERADDR statement in this data set specifies the use of the resolver and name server, the socket library performs the specified queries and returns any answer it receives.
 - If no answer is received, the socket library performs the actions in step 3, below.
3. It looks for the TCPIP_PREFIX.ETC.HOSTS data set; the MVS data set equivalent to /etc/hosts. If it finds the data set, the socket library returns the result, including failure.

The SAS/C environment has a limit of three name servers, and thus the SAS/C socket library only recognizes the first three name servers specified in this data set.

Note – Contact your TCP/IP Networking Administrator for details regarding the content and format of the configuration data sets mentioned above.

Resolving the TCPIP_PREFIX High Level Qualifier

The high level qualifier for the previously listed data sets defaults to TCPIP (IBM convention), or can be set using the DATASETPREFIX statement in the IBM TCP/IP configuration data set TCPIP.DATA. To access this data set, add the following DD statement to the HSC Started Task procedure:

```
//SYSTCPD DD DSN=ddd.eee.fff(anyname)
```

This DD statement identifies the data set used to obtain parameters defined by the IBM TCPIP.DATA configuration data set. Refer to the *IBM TCP/IP Customization and Administration Guide* for more information.

LU6.2 Support

IBM APPC/MVS and VTAM are required to support SNA LU6.2 clients.

The following steps must be performed if LibraryStation will be used to communicate with LU6.2 clients. These steps should be performed by an experienced network systems programmer who is familiar with VTAM, APPC/MVS, and the physical network hardware used to connect the client system to MVS. It may also be necessary to involve the network administrator who is responsible for the client system.

Before performing these steps, verify that the following prerequisite requirements are met:

- MVS is the installed operating system.
- VTAM 3.4 or later is installed and operational.
- All network hardware used to connect the client system to MVS is installed and properly defined to VTAM.

It may be helpful to have the following manuals available for reference:

- *IBM MVS/ESA Planning: APPC Management*
- *IBM VTAM Customization*
- *IBM VTAM Resource Definition Reference*
- *IBM VTAM Network Implementation Guide*

If you are not familiar with APPC/MVS, take time to familiarize yourself with the *IBM MVS/ESA Planning: APPC Management manual*.

Note – The examples provided in this description use LIBSTAT as the Logical Unit (LU) name for LibraryStation. This can be changed to meet any LU naming conventions your installation may require.

VTAM Setup

1. A local Logical Unit for LibraryStation must be defined with a VTAM application (APPL) definition statement in SYS1.VTAMLST. This is the Logical Unit that the client system will use in order to connect to LibraryStation. The Logical Unit is defined to APPC using an LUADD statement in the APPCPMLS SYS1.PARMLIB member and it is also specified in the APPC side information entry that LibraryStation uses in order to register with APPC.

Details about creating the APPCPMLS member in SYS1.PARMLIB and the APPC side information file are provided later in this description. The following APPL statement can be used:

```
LIBSTAT      APPL      ACBNAME=LIBSTAT,
                  APPC=YES,
                  AUTOSES=0,
                  DDRAINL=NALLOW,
                  DLOGMOD=APPCHOST,
                  DMINWNL=5,
                  DMINWNR=5,
                  DRESPL=NALLOW,
                  DSESLIM=10,
                  LMDENT=19,
                  MODETAB=LOGMODES,
                  PARSESS=YES,
                  SECACPT=CONV,
                  SRBEXIT=YES,
                  VPACING=1
```

FIGURE 2-7 Sample VTAM Setup APPL Statement

2. Logon mode entries necessary for LU6.2 sessions must be compiled into the logon mode table that exists in SYS1.VTAMLIB. The required entries are SNASVCMG and APPCHOST. These entries can be found in the SYS1.SAMPLIB member ATBLMODE.

The *IBM MVS/ESA Planning: APPC Management manual* provides more details about defining the local Logical Unit and logon mode entry.

Note – Other VTAM setup is required to define the physical connection between the client system and MVS. An experienced network systems programmer should be involved in this setup and it should be completed before installing LibraryStation.

APPC/MVS Configuration

The setup for APPC/MVS consists of the following steps:

1. Create a member in SYS1.PARMLIB named APPCPMLS with the following information (or add to an existing APPCPMxx member):

```
LUADD ACBNAME(LIBSTAT) BASE NOSCHED TPDATA(side_info_file)
SIDEINFO DATASET(side_info_file)
```

where: *side_info_file* is the name of the VSAM KSDS that contains APPC side information for the installation (see step 2).

Note – If a Base already exists, do not include “BASE” in the statement above.

The *IBM MVS/ESA Planning: APPC Management* manual describes the APPCPMxx parmlib statement in more detail.

When APPC is started through the use of the START APPC MVS command, you must specify the last two letters of the member name on the START command, as shown in the following example:

```
START APPC, SUB=MSTR, APPC=LS
```

The *IBM MVS/ESA Planning: APPC Management* manual provides detailed information about starting and stopping APPC. It also includes instructions for displaying the status of APPC using the DISPLAY APPC command.

2. Create the APPC side information file and add an entry for LibraryStation.

The following JCL can be used to define and populate an APPC side information file suitable for LibraryStation operation. If your site already has a side information file defined, you only need to run the INITSIDE step.

```
//DEFAPPC JOB job card information
//DEFSIDE EXEC PGM=IDCAMS
//SYSPRINT DD SYSOUT=*
//SYSABEND DD SYSOUT=*
//AMSDUMO DD SYSOUT=*
//SYSIN DD *
        DEFINE CLUSTER (NAME(cluster_name) _
        VOLUME(volser) _
        INDEXED REUSE _
        SHAREOPTIONS(3 3) _
        RECORDSIZE(248 248) _
        KEYS(112 0) _
        RECORDS(5 5)) _
DATA _
        (NAME(cluster_name.DATA)) _
INDEX _
        (NAME(cluster_name.INDEX))
```

FIGURE 2-8 Sample APPC Side Information File - Part 1

```

//INITSIDE EXEC PGM=ATBSDFMU
//SYSPRINT DD SYSOUT=*
//SYSSDLIB DD DSN=cluster_name,DISP=SHR
//SYSSDOUT DD SYSOUT=*
//SYSIN DD DATA,DLM='JR'
SIADD
    DESTNAME(LIBSTAT)
    TPNAM(CSCI)
    PARTNER_LU(LIBSTAT)
    MODENAME(APPCHOST)

```

FIGURE 2-9 Sample APPC Side Information File - Part 2

cluster_name

The file name specified here is used on the SIDEINFO DATASET statement in the APPCPMLS parmlib member (see step 1 above).

PARTNER_LU

used by LibraryStation when it registers with the APPC address space. It is also used by the SLGDIAG utility to define the destination Logical Unit. This Logical Unit name must match the name (LIBSTAT) that was chosen on the VTAM APPL statement. See [“VTAM Setup” on page 18](#).

MODENAME

the name of the logon mode that controls the session between LibraryStation and the client application. A sample logon mode (APPCHOST) is provided. See [“VTAM Setup” on page 18](#).

APPC/MVS Operation

Prior to starting LibraryStation, APPC/MVS and VTAM should be up and all physical and logical units used to connect the client system to the LibraryStation Logical Unit should be active. This can be done either manually with operator commands or automatically at IPL. Contact your network system programmer for help. The *IBM MVS/ESA Planning: APPC/MVS Management Manual* describes the start command for starting APPC/MVS. The *IBM VTAM Operation Manual* describes commands for starting VTAM and for activating logical units.

XCF Support

In a sysplex environment, MVS Cross-system Coupling Facility (XCF) can be used for communication between LibraryStation and MVS/CSC.

XCF is enabled by the LSINIT COMMTYPE statement and configured with the LSINIT XCFGROUP and XCFMEMBER statements.

In the MVS system PARMLIB, member COUPLExx parameter GROUP is installation-definable but defaults to SLGSTATN. The COUPLExx parameter must match the LibraryStation parameter XCFGROUP.

Configuring Security Measures

Network client access to library resources is controlled by LibraryStation security measures. Resources that may require access control fall into three categories: tape cartridge drives, volumes, and client commands.

Depending on your security decisions, one or more of the tasks described in this chapter may require specific parameter settings or additional work on your part **before** you reconfigure the HSC LIBGEN.

Drive Access Security

Access to tape cartridge drives is controlled by limiting the number of drives that are available to LibraryStation. LibraryStation drives are defined in the HSC LIBGEN as belonging to the host associated with the NETHOST keyword in the LSINIT control statement. Drives that are not associated with this hostid are restricted from use by the network.

To restrict the number of tape cartridge drives the network can use, you must define which specific drives are available to LibraryStation. This procedure is described in [“Configuring Drive Device Numbers” on page 39](#).

Volume Access Security

LibraryStation provides two levels of access security for client’s volumes. Neither, one, or both can be implemented. One level of security allows protection of MVS volumes from all network clients. The other level of security allows volume access on a client-by-client basis. Both levels are implemented using RACROUTE calls to specify authorization to use the volume.

The IBM RACROUTE request specifies the APPL=‘SLGSTATN’ parameter. This can be used by your SAF exits to identify that the request came from LibraryStation.

When using either method of volume authorization checking, you must write security rules to allow or deny access to the volumes. See [“Implementing Network-Level Volume Authorization Checks” on page 24](#) for more information.

Note – When a sysplex is running LibraryStations with NOPDF and PDF options, use of LibraryStation volume access security is critical for protection of both MVS and network client volumes.

The following parameters of the LSINIT statement influence both levels of volume authorization checking.

```
LSINIT VSECLOG(YES) AUTHCLS(#LSTAPE) VOLNOPRF(ALLOW)
```

where:

VSECLOG(YES)

Setting the VSECLOG parameter to YES causes volume security violations to be logged on the MVS system log and in the HSC job log. It is recommended that VSECLOG be set to YES during initial testing of volume authorization. After you are satisfied that volume authorization is working as desired, you can change the parameter to NO to stop receiving these messages.

AUTHCLS(#LSTAPE)

This parameter defines the security class to which the volumes are defined. The above example defines a new security class called #LSTAPE. Once you have picked a security class, use that name for the AUTHCLS parameter value.

The default value for AUTHCLS is TAPEVOL. If you are using a security product that also provides the TAPEDSN class, it is recommended that TAPEVOL not be used. Some security products alter the list of users allowed to access a volume when the TAPEDSN class is also being used. This can cause LibraryStation authority checking to fail, thus allowing inappropriate access.

An alternative to the TAPEVOL class is the FACILITY class. This is a defined class to some security products and thus does not require you to create a new security class.

You can define your own security class to be used in the RACROUTE calls. Be sure to follow all the steps required by your security package to define and activate the class.

VOLNOPRF(ALLOW)

Volumes not defined to the security class are considered to be available for any client request. If you have many MVS volumes and you use the RACF security product, you can prevent clients from accessing undefined volumes by setting VOLNOPRF to DENY as a parameter on the LSINIT statement. If a volume is unknown to RACF, read or write access to the volume is denied. VOLNOPRF works in conjunction with VOLACC or VOLAUTH.

Record site specific values for these parameters in [Appendix A](#).

Network-Level Volume Authorization Checks

When your installation wants to protect MVS volumes from all network clients and does not want to protect one client's volumes from another client, network-level volume authorization checking is a good choice for volume protection.

Network-level volume authorization checks work in the following manner. When a client requests access to a volume, an IBM RACROUTE call with REQUEST=AUTH is issued to the System Authorization Facility (for example, RACF) to determine whether LibraryStation has access to the volume. If LibraryStation's access to the volume is not sufficient, the client request is denied. For example, when a client requests to eject a volume, LibraryStation must have UPDATE authority to that volume for the client eject request to succeed. If LibraryStation has no access or only READ access to the volume, the client eject request fails. The client is notified that the volume is in use. A complete list of client requests with required LibraryStation authority for network-level volume authorization is provided in "Implementing Network-Level Volume Authorization Checks" below.

The VOLAUTH parameter of the LSINIT statement determines if network-level volume authorization is in effect.

```
LSINIT VOLAUTH (YES) , VSECLOG (YES) , AUTHCLS (#LSTAPE) , VOLNOPRF (ALLOW)
```

where:

VOLAUTH(YES)

Setting the VOLAUTH parameter to YES or letting it default to YES enables network-level volume authorization checking.

Record your value for this parameter on the LibraryStation Configuration Worksheet in [Appendix A](#).

Implementing Network-Level Volume Authorization Checks

If you plan to require network volume-access security, you must use a security product (for example, RACF) on your MVS system.

To enable this level of volume-access control, you could use the following steps:

1. Create a security id for LibraryStation. LibraryStation issues the RACROUTE REQUEST=AUTH macro from the HSC address space. The security id associated with the RACROUTE request will be the security id defined for the HSC address space. Follow the rules of your security package for defining a security id for a started task. Do not give the security id any special privileges.
2. If you are not using the TAPEVOL or FACILITY security class, create a security class for the tape volumes.
3. Activate the security class you are using.
4. Define volumes to the security class.
5. Write security rules to allow LibraryStation (the HSC started-task security id) the appropriate access to the library volumes.
6. To prevent clients from mounting scratch volumes meant only for HSC use, define separate scratch subpools for LibraryStation. See [“Scratch Pool Processing” on page 32](#) for more information.
7. Verify that the VOLAUTH parameter of the LSINIT statement is set to YES or allowed to default. See [“Configuring Drive Device Numbers” on page 39](#) for a description of the VOLAUTH parameter.

SAF checks are issued for the following requests:

- Requests requiring a minimum of READ authority:
 - Dismount
 - Mount with read-only option
 - Query_volume
- Requests requiring a minimum of UPDATE authority:
 - Eject
 - Mount
 - Set_scratch

If you plan not to require network volume-access security, you should disable it by specifying VOLAUTH(NO) in the LSINIT control statement.

Example 1 - Restricting all MVS volumes from network client use

To restrict MVS volumes from network client use of any kind, you could use the following steps:

1. Create a security id for LibraryStation by defining a security id for the HSC started task.
2. Using your security product:
 - Use the FACILITY class to define volumes, and activate the class.
 - Reserve volumes 000000-199999 for MVS use only. (Write rules to deny access to these volumes for the LibraryStation security id.)
 - Reserve volumes 200000-200099 for client use. (Write rules to allow UPDATE access to these volumes for the LibraryStation security id.)
3. Set up the LibraryStation scratch pool so that no MVS volumes reside in the pool. To allow this, add the following statement to the HSC parameter data set:


```
SCRPOOL NAME(LIBSTA) , RANGE(200000-200099)
```

 (The scratch pool is associated with LibraryStation in the next step.)
4. Update the LSINIT control statement in the HSC parameter data set:


```
LSINIT COMMONSP(LIBSTA) AUTHCLS(FACILITY) VSECLOG(YES)
      NETHOST(hostid)
```

Volume authorization is active by default. All client volumes are in one subpool that does not contain any MVS-only volumes. All volumes are defined to the FACILITY security class and security violations are to be logged on the MVS system log.

As a result, when a client request is received for a volume, RACROUTE is issued. If the volume is in the range for MVS-only volumes, access is denied and message SLS3945I is issued to the MVS system log. If the volume is in the range for client volumes, access is allowed and the client request continues to execute.

Example 2 - Restricting most MVS volumes from network client use

To restrict most MVS volumes from network client use of any kind, while allowing the clients to share a few MVS volumes in read-only mode, you could use the following steps:

1. Create a security id for LibraryStation by defining a security id for the HSC started task.
2. Use your security product to:
 - Use the FACILITY class to define volumes, and activate the class.
 - Reserve volumes 000000-199999 for MVS use only. (Write rules to deny access to these volumes for the LibraryStation security id.)
 - Reserve volumes 200000-200099 for client use. (Write rules to allow UPDATE access to these volumes for the LibraryStation security id.)
 - Allow the volumes 300000-300005 to be shared by MVS and the clients. Clients are only allowed to read these volumes. (Write rules to allow READ access to these volumes for the LibraryStation security id.)
3. To set up the LibraryStation scratch pool so that no MVS volumes reside in the pool, add the following statement to the HSC parameter data set:


```
SCRPOOL NAME(LIBSTA) , RANGE(200000-200099)
```

(The scratch pool is associated with LibraryStation in the next step.)
4. Update the LSINIT control statement in the HSC parameter data set:


```
LSINIT COMMONSP(LIBSTA) AUTHCLS(FACILITY) VSECLOG(YES)
      NETHOST(hostid)
```

Volume authorization is active by default. This statement defines all client volumes in one subpool that does not contain any MVS-only volumes. All volumes are defined to the FACILITY security class and security violations are to be logged on the MVS system log.

When a client request is received for a volume, RACROUTE is issued. If the volume is in the range for MVS-only volumes, access is denied and message SLS3945I is issued to the MVS system log. If the volume is in the range for client volumes, access is allowed and the client request continues to execute. If the volume is in the shared range of volume serials and the client request requires UPDATE authority, access is denied and message SLS3945I is issued to the MVS system log. If the volume is in the shared range of volume serials and the client request requires READ authority, access is allowed.

Client-Level Volume Authorization

If you would like to limit the volumes that a specific client can access, use client-level volume authorization. This level associates a security id with a client. This security id is used in the RACROUTE call to determine whether the client has the authority required to perform its request. Client-level volume authorization can be used to protect a client's volume from another client and to protect MVS volumes from specific clients.

When using client-level volume authorization, the clients must be defined in the LSDEF file. The CLIENTID statement in that file associates a security id with the client's network identifier. That security id is used in the RACROUTE call to determine whether the client has authority to the volume. See [“Configuring the LSDEF Data Set” on page 58](#) for more information on the LSDEF Data Set.

Client-level volume authorization works in the following manner. When a client requests access to a volume, and IBM RACROUTE REQUEST=AUTH call is issued to the System Authorization Facility specifying the client's security id and the volume serial number to determine whether the client has access to the volume. If the client's access to the volume is not sufficient, the client request is denied. For example, when a client requests to eject a volume, the client must have UPDATE authority to that volume for the eject to succeed. If the client has no access or only READ access to the volume, the eject request fails. The client is notified that access has been denied or that the volume is not in the library. The response depends on the network protocol level supported by the client. A complete list of client requests with required client authority for client-level authorization is provided in [“Implementing Client-Level Volume Authorization Checks” on page 28](#).

The VOLACC parameter of the LSINIT statement determines if client-level volume authorization is in effect.

```
LSINIT VOLACC (YES) VSECLOG (YES) AUTHCLS (#LSTAPE) VOLNOPRF (ALLOW)
      VOLAUTH (NO)
```

where:

VOLACC(YES)

Setting the VOLACC parameter to YES enables client-level volume authorization checking. The default is NO.

Note – VOLACC(YES) is supported only when COMMTYPE is specified as RPC or LU6.

VOLAUTH(NO)

Network-level volume authorization is active by default. In the example above, network-level volume authorization is turned off. Clients can also be restricted from MVS volumes by using client-level volume authorization checking.

Record your value for this parameter on the LibraryStation Configuration Worksheet in [Appendix A](#).

Implementing Client-Level Volume Authorization Checks

If you plan to require security for volume access on a client level, you must install a security product (for example, RACF) on your MVS host system.

To enable volume-access control at the client level, you could use the following steps:

1. Create a security id for each client.
2. Add a CLIENTID parameter in the LSDEF file for each client. See [“Configuring the LSDEF Data Set” on page 58](#) for more information.
3. Create a security class for the tape volumes if you are not using the TAPEVOL or FACILITY security class.
4. Activate the security class you are using.
5. Define volumes to the security class.
6. Write security rules to allow the client security id appropriate access to the library volumes.
7. Verify that LSINIT parameter VOLACC is set to YES. See [“Configuring the LSINIT Control Statement” on page 44](#) for more information.

LibraryStation issues RACROUTE calls for the following client network requests:

- These requests require a minimum of READ authority:
 - Dismount
 - Mount with read-only option
 - Query_volume
- These requests require UPDATE authority:
 - Eject
 - Lock
 - Mount
 - Mount_scratch
 - Set_scratch
 - Unlock

Example 1 - Separating volumes for two clients and for MVS

To keep volumes separate for two clients and for MVS, you could use the following steps:

1. Use your security package to create a security id for each client in the complex.
2. Update the LSDEF file to associate the network location of the client with its security id. For example:

```
CLIENTID IPADDR(129.xx.xx.xxx) NAME(CLIENT1)
CLIENTID LUNAME(CLINT2LU) NAME(CLIENT2)
```

(In this example, one client is using TCP/IP and the other is using LU6.2.)

3. Use your security package to:
 - Use the FACILITY class to define volumes, and activate the class.
 - Reserve volumes 000000-199999 for MVS use only. (Write rules to deny access to these volumes for both CLIENT1 and CLIENT2.)
 - Reserve volumes 200000-299999 for CLIENT1 use. (Write rules to allow UPDATE access to these volumes for CLIENT1 and rules to deny access to these volumes for CLIENT2.)
 - Reserve volumes 300000-399999 for CLIENT2 use. (Write rules to allow UPDATE access to these volumes for CLIENT2 and rules to deny access to these volumes for CLIENT1.)

4. Update the LSINIT control statement in the HSC parameter data set as follows:

```
LSINIT VOLACC(YES) VOLAUTH(NO) AUTHCLS(FACILITY) VSECLOG(YES)
```

Volume authorization is active by default. This control statement turns off volume authorization and activates volume-access checking at the client level. Volumes are defined to the FACILITY security class, and security violations are to be logged on the MVS system log.

As a result, when a client request is received for a volume, RACROUTE is issued. If the volume is in the range for MVS-only volumes, access is denied. If the volume is in the range for CLIENT1 volumes, access is allowed for CLIENT1 and denied for CLIENT2. If the volume is in the range for CLIENT2 volumes, access is allowed for CLIENT2 and denied for CLIENT1. Whenever access is denied, message SLS3945I is issued to the MVS system log.

Volume Security Hierarchy

When both methods of volume security checking are specified (VOLAUTH and VOLACC parameters), the specific client volume-access checking is performed first.

The client commands that access volumes and are under the sphere of both the VOLAUTH and VOLACC parameter checking are:

- Dismount
- Eject
- Mount
- Query_volume
- Set_scratch

The client commands that are under the sphere of only the client volume access (VOLACC parameter) are:

- Lock
- Mount_scratch
- Unlock

Note – The *mount with read_only option* listed under the client volume access is not a separate command. The read_only option is specified by a parameter of the client MOUNT command.

If you plan not to require volume-access security on a client level, you can leave the VOLACC parameter unspecified in the LSINIT control statement.

Subpool Security Implications

For installations that use VOLAUTH only, network requests to mount scratch volumes do not pass through the IBM RACROUTE request mechanism. VOLACC issues RACROUTE calls for scratch mounts; VOLAUTH does not.

For VOLAUTH-only installations, network clients can mount any volume that is both identified as a scratch volume in the HSC Control Data Set (CDS), and defined in a scratch subpool known to the client. Consequently, for VOLAUTH-only installations, you must define subpools to contain only those volumes that network clients are allowed to mount. This is done in the HSC SCRPOOL control statement. See [“Scratch Pool Processing” on page 32](#) for more information about defining subpools.

Network requests to mark a volume as scratch go through the IBM RACROUTE request check, preventing clients from scratching a volume they would not normally have access to and then performing mount scratch requests until the desired volume is mounted. However, if the HSC SCRATCH UPDATE utility is run to mark the volume as scratch, and if MVS and the client share a scratch pool, the clients could gain access to the volume.

Command Access Security

RACF is the only security package supported by LibraryStation for command-level authorization checks. Access to commands is controlled by RACROUTE request calls to the System Authorization Facility (for example, RACF) to determine whether the command can be used by a network-attached user. Commands that SAF indicates cannot be accessed are not available to the client.

If you plan to require security for command access on a client level using RACROUTE calls to the System Authorization Facility (SAF), you must install RACF on your MVS host system, and you must enable the CMDACC parameter (CMDACC(YES)) in the LSINIT control statement. See [“Configuring the LSINIT Control Statement” on page 44](#).

To enable this level of access control, perform the following steps:

1. Use your security product to create a security id for the client.
2. Notify LibraryStation of the userid for the client by adding a CLIENTID parameter to the LSDEF file for the client. See [“Configuring the LSDEF Data Set” on page 58](#) for a description of the CLIENTID parameter.
3. Define the commands as applications to the security product as follows:

TABLE 2-1 Command to Application Name Cross Reference

Command	Application Name
CANCEL	SLGCANCL
CLEAR_LOCK	SLGCLRLK
DISMOUNT	SLGDISMO
EJECT	SLGEJECT
ENTER	SLGENTER
IDLE	SLGIDLE
LOCK	SLGLOCK
MOUNT	SLGMOUNT
MOUNT_SCRATCH	SLGMSCRT
QUERY	SLGQUERY
QUERY_LOCK	SLGQUYLK
SET_SCRATCH	SLGSETSC
START	SLGSTART
UNLOCK	SLGUNLOK
VARY	SLGVARY
VIRTUAL_MOUNT	SLGVMNT

4. Write rules to allow the client to read the application.
5. Activate the APPL class.
6. The startup parameter CMDACC in the LSINIT statement can be used to enable or disable command authorization checks. This parameter is disabled by default. Verify that the CMDACC parameter is set to YES. See [“Configuring the LSINIT Control Statement” on page 44](#) for a description of the CMDACC parameter.

Commands that SAF indicates cannot be accessed are reported as “access denied” or “invalid command”.

If you plan not to require command access security on a client level, you can leave the CMDACC parameter in the LSINIT control statement unspecified.

Scratch Pool Processing

LibraryStation relies on HSC to define the scratch pools it uses. HSC has a common, unnamed scratch pool that contains all scratch volumes. It also defines multiple, named scratch subpools that are subsets of the common pool. These scratch subpools are defined in the HSC PARMLIB by SCRPOOL statements. These statements indicate ranges of volumes that belong to the scratch subpool. If a volume also has the “scratch” attribute, then it can be selected for scratch mounting.

```
SCRPOOL NAME (LIBSTAT) , RANGE (LS1###-LS13##) , LABEL (SL)
SCRPOOL NAME (LSPOOL) , RANGE (LS13#1-LS14##) , LABEL (SL)
```

Note –

- If you use the HOSTID parameter on the SCRPOOL statement, it should point to your HSC host.
 - The time taken by Library Station to complete a query scratch request is proportional to the number of volumes included with the RANGE parameter. If you use ranges that include a large number of volumes, a query scratch can take a long time.
-

The scratch subpools may also be defined using the Scratch Subpool User Exit (SLSUX03), but the SCRPOOL statements are preferred. The ranges of volumes in the SCRPOOL statements can overlap, so some volumes can be in multiple scratch subpools.

LibraryStation only has access to named HSC scratch subpools that are identified for its use. These are identified in two ways.

1. The COMMONSP parameter of the LSINIT statement points LibraryStation’s scratch pool 0 to a named HSC scratch subpool. This scratch pool, and therefore this statement, are required for LibraryStation.

```
COMMONSP (LIBSTAT)
```

2. The SPNUM statement in the LSDEF data set equates a LibraryStation numeric scratch pool (0-65534) to an HSC-named scratch subpool. This statement is useful for clients who use scratch pools other than 0. For example:

```
SPNUM NUM(2) SPNAME(LSPOOL1)
SPNUM NUM(2) SPNAME(LSPOOL2) IPADDR(1.2.3.4)
```

In this example, the client at address 1.2.3.4 would get volumes from LSPOOL2 when referring to pool 2, and all other clients would get volumes from LSPOOL1.

Because HSC scratch subpools are defined during initialization, they, as well as LibraryStation scratch pools, are static. New scratch pools cannot be dynamically defined. New volumes outside the defined range cannot be dynamically included in a scratch pool. Also, a volume can be defined in the ranges for two scratch subpools. Thus, scratching it in one automatically scratches it in the other. For this reason, you may want to avoid overlapping pools if you want to keep volumes separate for various clients or for HSC. If you want distinct subpools for HSC and for clients, you should code the Job Processing User Exit (SLSUX01) not to select from the LibraryStation subpools if an HSC subpool is depleted. LibraryStation scratch requests do not use the exit, so their selection is always from the specified subpool.

Note – LibraryStation scratch mount requests have no interface to a Tape Management System (TMS) on MVS, so the subpools used by LibraryStation should not be defined to the TMS. Defining a subpool to the TMS may cause the TMS to have incorrect status for volumes if they are mounted by a client that does not have an interface to the TMS. For a TMS that works on the client side, take special care to keep the HSC scratch information synchronized with that in your TMS, because HSC can change scratch volumes without the knowledge of the client.

If your installation contains volumes stored on various media types, you can segregate them in scratch pools through careful definition of the HSC scratch subpools. Even if you do not segregate the pools, during scratch mounting, LibraryStation picks a volume whose medium is appropriate for the drive type. LibraryStation gets its scratch counts for selection from HSC VOLATTR statements, so VOLATTR statements should be coded for all non-standard volumes in scratch ranges.

LibraryStation has a POOLCHK parameter on the LSINIT statement that affects the scratching of volumes.

- With POOLCHK set to YES (the default), a set scratch request for a volume and a scratch pool ensures that the volume is defined in that pool before scratching the volume.
- With POOLCHK set to NO, no checking is done to see whether the volume is defined in any scratch pool before scratching it.

Security Summary

The following list summarizes the methods available to you for ensuring that network clients cannot circumvent MVS access controls:

- Restrict the number of tape cartridge drives the network can use in the HSC LIBGEN for the hostid in the NETHOST keyword
- Use SAF security checks for volume access control
- Write rules that grant the HSC update authority for only those volumes the network is permitted to use, and also to prevent MVS users from accessing network client volumes
- Write rules to manage volume access for individual clients
- Define the subpools to contain only volumes the network is permitted to use.
- If you are using RACF, deny access to undefined volumes
- Use SAF security checks for command authorization control

Record your value for this parameter on the LibraryStation Configuration Worksheet in [Appendix A](#).

Allocating the Persistent Data File

LibraryStation software includes a Database Manager (DBM) that is initialized during LibraryStation initialization. The DBM is responsible for managing several pertinent data objects that are not maintained by the HSC, including resource locks and drive status.

Data objects managed by the DBM are stored in one or more VSAM files. These files are collectively referred to as the Persistent Data File (PDF).

The PDF contains the following data objects:

- Volume records
Volume records contain only a lockid. They exist only while the volume is locked and are automatically deleted when the volume is unlocked.
- Drive records
A single drive record exists for each drive configured to LibraryStation. Each drive record consists of a lockid as well as status and state information.
- Lockid records
One lockid record exists for each unique lock identifier that has been assigned to the requesting clients. The lockid record contains a lock identifier and the associated owner of the lock.

The PDF VSAM data sets are initially defined during LibraryStation installation. This procedure is contained in the *NCS Installation Guide*.

Note – If you are migrating from a previous release of LibraryStation, you must delete the existing PDF and define a new PDF for LibraryStation 6.2. Refer to the *NCS Installation Guide* for this procedure.

After LibraryStation is installed, these data sets can be allocated using either of the following two methods:

- Specify the PDF and PDFX keywords on the LSINIT control statement. This method is required when requesting cross host recovery support.
- Specify the SLSPDF and SLSPDFX DD statements in your HSC Started Task Procedure.

The PDF in a Multiple Host Environment

LibraryStation software can be installed on or made available to more than one host system in a heterogeneous environment. However, it can only be fully-initialized on one host system at a time. For system redundancy in the event of a failure, more than one host system can be made capable of fully-initializing LibraryStation.

- Using Cross host recovery (implemented with the XHREC LSINIT parameter), the active LibraryStation automatically notifies standby LibraryStations to begin initialization. The first standby LibraryStation that is notified becomes active.
- LibraryStation can also be manually initiated from an alternate host using the LS INIT operator command.

See the CHREC, HOSTID and DEFER options in [“Configuring the LSINIT Control Statement” on page 44](#) for more information.

In an MVS sysplex environment with added heterogeneous support for non-MVS/CSC clients, you must allocate a single Persistent Data File (PDF) using one of the methods described in this chapter.

You must specify the keyword parameter NOPDF in the LSINIT control statement for all other LibraryStations that will be active at the same time. This parameter is not required when defining standby LibraryStations. See [“Configuring the LSINIT Control Statement” on page 44](#) for more information about the NOPDF and XHREC LSINIT parameters.

Note –

- In an MVS sysplex environment with added heterogeneous support for non-MVS/CSC clients, you must allocate a single Persistent Data File (PDF) using one of the methods described in this chapter.

You must specify the keyword parameter NOPDF in the LSINIT control statement for all other LibraryStations that will be active at the same time. This parameter is not required when defining standby LibraryStations. See [“Configuring the LSINIT Control Statement” on page 44](#) for more information about the NOPDF and XHREC LSINIT parameters.

- A single PDF is defined for LibraryStation, and the host system where LibraryStation is initialized must have access to the DASD volume where the PDF is located. Thus, in a multiple host environment where more than one host is capable of initializing LibraryStation, the PDF must be located on shared DASD that is accessible to each initializing host.
- To prevent the corruption of the PDF, LibraryStation issues a SYSTEMS ENQ. The ENQ QNAME is the HSC ENQ QNAME specified by the MAJNAME parameter of the HSC LIBGEN. The ENQ RNAME is LS:ACTIVE.

If you make LibraryStation software available to more than one host, you are responsible for propagating the SYSTEMS ENQ to each host. This can be done via Global Resource Serialization (GRS) or a functionally equivalent product.

Configuring the LibraryStation Hostid

A LibraryStation hostid must be defined in the HSC LIBGEN. This hostid is associated in the HSC LIBGEN with the cartridge drives that are assigned to LibraryStation. The hostid you define in this task will be used as the value for the NETHOST parameter in the LSINIT statement.

During operation, the LibraryStation hostid is specified by LibraryStation to the HSC for network drive requests. Additionally, this hostid is required for the HSC Mount and Dismount commands if operators are to mount or dismount volumes on cartridge drives assigned to LibraryStation.

Note – The NETHOST parameter specification on the LSINIT control statement must match the hostid that you define in this task. See [“Configuring the LSINIT Control Statement” on page 44](#) for more information about the NETHOST parameter.

To configure the HSC LIBGEN Hostid for LibraryStation, modify the HSC SLILIBRY macro in the HSC LIBGEN to define the LibraryStation hostid. SLILIBRY defines the global characteristics of the library. The SLILIBRY HOSTID parameter identifies each host that accesses the ACS and is the parameter you will modify to create your LibraryStation hostid.

The following sample illustrates where your hostid appears in the SLILIBRY macro.

```

*
      SLILIBRY  SMF=255 .                                X
              HOSTID=( HSC1 , LSID)                    X
             >NNLBDRV=( CARTAPEA , CARTAPEB ) ,         X
              DELDISP=NOSCRATCH ,                      X
              ACSLIST=NAMEACS ,                         X
              MAJNAME=STKALSQN ,                       X
              COMPRFX=# ,                               X
              SCRLABL=SL ,                              X
              EJCTPAS=GOODDAY ,                        X
              CLNPRFX=CLN
*

```

FIGURE 2-10 Sample SLILIBRY Macro with LibraryStation Hostid

The LibraryStation hostid you define in this task can consist of one to eight alphanumeric characters. You might consider including the letters "LS" in the name to identify it as your LibraryStation hostid. Refer to the *HSC System Programmer's Guide* for more information about the SLILIBRY macro and the HSC LIBGEN process.

The SLIACS macro no longer requires a STATION parameter for each hostid in the configuration. **This parameter is optional.** If STATION is specified, parameters can be omitted for hosts that are not attached to the ACS by using the comma delimiter as follows:

Example:

```
STATION= ( , STN1)
```

where HOST0 does not have a defined connection and STN1 is a defined connection to Host.

In addition, the SLISTATN macro entry with a dummy address is no longer required and should not be entered.

Refer to the *HSC Configuration Guide* for more information about the macros and parameters mentioned above.

Enter your LibraryStation hostid on the LibraryStation Configuration Worksheet in [Appendix A](#).

Configuring Drive Device Numbers

In this task, you configure device numbers in the HSC LIBGEN for tape cartridge drives that are assigned to LibraryStation.

Device numbers must be assigned in the HSC LIBGEN for network tape cartridge drives used by LibraryStation. The tape cartridge drives represented by the assigned device numbers are associated with LibraryStation via the HSC LIBGEN hostid defined in the previous chapter.

Additionally, all LibraryStation drives must be defined in the LIBGEN for the HSC host on which LibraryStation is executed. Failure to do so results in LibraryStation drives with unknown device types.

Device numbers must be assigned in the HSC LIBGEN for network tape cartridge drives used by LibraryStation. The tape cartridge drives represented by the assigned device numbers are associated with LibraryStation via the HSC LIBGEN hostid defined in the previous chapter.

Note – Access to tape cartridge drives is controlled by limiting the number of drives that are available to LibraryStation. By not defining MVS drives for the LibraryStation hostid, you prevent network mounts and dismounts on these drives. See [“Configuring Security Measures” on page 21](#) for more information.

Device numbers can consist of three or four hexadecimal characters. All numbers are valid because device numbers are only associated with the LibraryStation hostid.

In addition, you must collect associated information for each device number you define. The following information is required by the HSC LIBGEN macros for each number:

- The ACS number (hexadecimal) where the drive is located
- The LSM number (hexadecimal) where the drive is located
- The drive panel number (decimal) where the drive is located

Refer to the *HSC Configuration Guide* for more information about the SLILSM, SLIDLIST, and SLIDRIVS macros and the HSC LIBGEN process.

Enter your device numbers and associated location information on the LibraryStation Configuration Worksheet in [Appendix A](#).

The process of defining device numbers for LibraryStation tape cartridge drives is somewhat dependent on your current configuration and how you intend to control network access to your tape cartridge drives. This process is outlined below in general terms, followed by a sample scenario that illustrates the steps you might take to achieve specific results.

Generally, defining device numbers for LibraryStation drives requires the following steps:

1. Add or modify the SLILSM macro

The SLILSM macro defines the panel numbers for an LSM. If this macro does not already include the drive panels you wish to make available to LibraryStation, modify it to define the physical location of these drive panels.

2. Add or modify the SLIDLIST macro

The SLIDLIST macro identifies which unique host addresses are associated with tape cartridge drives residing on a specific drive panel.

If you modified a SLILSM macro in the previous step, you must create a new SLIDLIST macro for each new panel.

If you did not modify a SLILSM macro, you still must modify existing SLIDLIST macros to define their relationship to the new LibraryStation hostid.

Note – HOSTDRV parameter operands in the SLIDLIST macro correspond to HOSTID parameter operands in the SLILIBRY macro.

The association is positional, so that the first hostid identified in the SLILIBRY macro is associated with the first hostdrv identified in the SLIDLIST macro, the second hostid is associated with the second hostdrv, and so on.

If the number of HOSTDRV operands in any SLIDLIST macro do not equal the number of HOSTID operands in the SLILIBRY macro, the HSC cannot be successfully initialized.

3. Add or modify the SLIDRIVS macro

The SLIDRIVS macro identifies whether or not tape cartridge drives in the panel specified in the SLIDLIST macro are available to the hostid associated with the HOSTDRV operand.

If the drives are available to the hostid, assign device numbers in the SLIDRIVS macro.

If the drives are not available to the hostid, enter position holding commas in the SLIDRIVS macro. Device numbers are not assigned.

Note – LibraryStation provides no automatic means of sharing tape cartridge drives between the MVS host and client systems. If a drive is being shared, you must use manual procedures to vary the drive offline to MVS and online to the client, and vice versa.

The following sample LIBGEN illustrates the process described above. Note that this sample contains only those macros and parameters that are pertinent to this discussion and does not represent a complete and functional HSC LIBGEN.

```

*
      SLILIBRY  HOSTID=(HSC1,LSID)
                        ACSLIST=NAMEACS
*
NAMEACS  SLIALIST  ACS0,ACS1
*
ACS0     SLIACS   LSM=LSM0,LSM1
*
LSM0     SLILSM  DRIVE=(1,2,10),
                        DRVELST=(PANEL1,PANEL2,PANEL10)
*
PANEL1   SLIDLIST HOSTDRV=(DRV1,DRV1)
DRV1     SLIDRIVS ADDRESS=(410,411,412,413)
*
PANEL2   SLIDLIST HOSTDRV=(DRV2,DUMMY2)
DRV2     SLIDRIVS ADDRESS=(414,415,416,417)
DUMMY2   SLIDRIVS ADDRESS=(,,)
*
PANEL10  SLIDLIST HOSTDRV=(DUMMY3,DRV3)
DUMMY3   SLIDRIVS ADDRESS=(,,)
DRV3     SLIDRIVS ADDRESS=(418,419,41A,41B)
*

```

FIGURE 2-11 Sample LIBGEN with LibraryStation Device Numbers

This example provides the following conclusions:

- About the system:
 - The SLILIBRY macro indicates there are two hosts, named HSC1 and LSID. The second hostid, LSID, is the LibraryStation hostid.
 - The SLIALIST macro indicates there are two ACSs, represented by ACS0 and ACS1.
 - The assembler label (ACS0) preceding the SLIACS macro indicates the macros that follow are for ACS0.
 - The SLIACS macro indicates there are two LSMs in ACS0, represented by LSM0 and LSM1.
 - The assembler label (LSM0) preceding the SLILSM macro indicates the macros that follow are for LSM0 in ACS0.
- About the drive panels:
 - The DRIVE parameter in the SLILSM macro indicates there are three drive panels (1, 2, and 10) in LSM0. The first and second drive panels are the first and second panels sequentially in the LSM; the third drive panel is the tenth sequential panel in the LSM.
 - The DRVELST parameter in the SLILSM macro establishes the assembler labels to be referenced by subsequent SLIDLIST macros. These labels (PANEL1, PANEL2, and PANEL10) correspond positionally to the DRIVE parameter operands, so that PANEL1 represents the first drive panel and PANEL10 represents the third drive panel.

- About PANEL1:
 - The assembler label (PANEL1) preceding the first SLIDLIST macro indicates the macro is for the drive panel represented by PANEL1 in the prior SLILSM macro.
 - The HOSTDRV operands (DRV1,DRV1) indicate by their relative positions that tape cartridge drives on PANEL1 are available to both of the hostids that were established in the SLILIBRY macro.
 - The assembler label (DRV1) preceding the first SLIDRIVS macro indicates the device numbers are being created for tape cartridge drives in PANEL1, which was associated with DRV1 in the previous SLIDLIST macro.
 - The device numbers that are created in the ADDRESS parameter apply to both hosts since the previous SLIDLIST macro made tape cartridge drives on this panel available to both hosts.
 - LibraryStation provides no automatic means of sharing tape cartridge drives between the MVS host and client systems. If a drive is being shared, you must use manual procedures to vary the drive offline to MVS and online to the client and vice versa.
- About PANEL2:
 - The assembler label (PANEL2) preceding the second SLIDLIST macro indicates the macro is for the drive panel represented by PANEL2 in the previous SLILSM macro.
 - The unique HOSTDRV operands (DRV2,DUMMY2) indicate that separate instructions for each host will be provided in the subsequent SLIDRIVS macros.
 - The assembler label (DRV2) preceding the second SLIDRIVS macro indicates the device numbers are being created for drives in PANEL2, which was associated with DRV2 in the previous SLIDLIST macro.
 - Since DRV2 was the first HOSTDRV operand in the previous SLIDLIST macro, this SLIDRIVS macro applies to the first hostid (HSC1) in the SLILIBRY macro.
 - The assembler label (DUMMY2) preceding the third SLIDRIVS macro indicates the device numbers are being created for PANEL2, which was associated with DUMMY2 in the previous SLIDLIST macro.
 - Since DUMMY2 was the second HOSTDRV operand in the previous SLIDLIST macro, this SLIDRIVS macro applies to the second hostid (LSID) in the SLILIBRY macro. Since no device numbers are defined here in the ADDRESS parameter, host LSID is precluded from accessing PANEL2 drives.
 - Thus, tape cartridge drives in the second drive panel are available to host HSC1 but are not available to LibraryStation.

- About PANEL10:
 - The assembler label (PANEL10) preceding the third SLIDLIST macro indicates the device numbers are being created for tape cartridge drives in the panel represented by PANEL10 in the previous SLILSM macro.
 - The unique HOSTDRV operands (DUMMY3,DRV3) indicate that separate instructions for each host will be provided in the subsequent SLIDRIVS macros.
 - The assembler label (DUMMY3) preceding the fourth SLIDRIVS macro indicates the device numbers are being created for PANEL10, which was associated with DUMMY3 in the previous SLIDLIST macro.
 - Since DUMMY3 was the first HOSTDRV operand in the previous SLIDLIST macro, it applies to the first hostid (HSC1) in the SLILIBRY macro. Since no device numbers are defined here in the ADDRESS parameter, host HSC1 is precluded from accessing PANEL10 drives.
 - The assembler label (DRV3) preceding the fifth SLIDRIVS macro indicates the device numbers are being created for PANEL10, which was associated with DRV3 in the previous SLIDLIST macro.
 - Since DRV3 was the second HOSTDRV operand in the previous SLIDLIST macro, it applies to the second hostid (LSID) in the SLILIBRY macro. Thus, the device numbers that are created here in the ADDRESS parameter apply to LibraryStation only.
 - Further, since no device numbers were created in the SLIDRIVS macro for DUMMY3, drives on PANEL10 are exclusively for access by LibraryStation.

Note – Some versions of the *HSC System Programmer's Guide* state that library station device numbers can be set using the HSC Set Utility with the SLISTATN option. This is a generic reference to LMU station device numbers and is not a reference to the LibraryStation product described here. LibraryStation device numbers cannot be set using the SLISTATN option of the HSC Set utility.

Configuring the LSINIT Control Statement

An LSINIT control statement must be specified in the HSC SLSSYSxx parameter data set to initialize the LibraryStation software with necessary parameters. LibraryStation cannot be initialized unless the LSINIT control statement is present.

In addition to its role in LibraryStation initialization, the LSINIT control statement contains parameter settings that define volume security, the default scratch subpool, the TCP/IP subsystem, and network call/response wait times.

Refer to the *HSC System Programmer's Guide* for more information about the parameter data set and control statement format.

Note – Virtual Storage Manager (VSM) support has been added for the LSINIT control statement. For more information, refer to the “LibraryStation Enhancements and Additions for VSM” chapter in the *VTCS Command and Utility Reference*.

LSINIT Control Statement Format

Keyword parameters of the LSINIT control statement define how LibraryStation functions at your installation and provide the HSC with information about your software implementation. Keyword parameters can be specified in any order. When not specified, most keywords assume default values. LibraryStation accepts (tolerates) multiple occurrences of a keyword. The value assigned to a keyword reflects the last occurrence of a keyword within a command.

The following sample illustrates the LSINIT control statement. This example shows the two parameters required in all instances, NETHOST and COMMONSP.

```
LSINIT NETHOST(LSID) COMMONSP(SP01)
```

Keyword parameters for the LSINIT control statement are summarized in [TABLE 2-2 on page 45](#) and then described individually. NETHOST and COMMONSP are the only parameters required in all instances. NOPDF is required in sysplex environments. These three parameters are described first. The remaining parameters are described in alphabetical order. See “[Required Keyword Parameters of LSINIT](#)” on page 48.

TABLE 2-2 LSINIT Keyword Parameters

Keyword	Function
COMMONSP	Specifies the HSC common scratch subpool name to be used as the default scratch subpool for LibraryStation
NETHOST	Specifies the LibraryStation hostid to which network drives are assigned
NOPDF	Disables the Persistent Data File (PDF)
AUTHCLS	Specifies the SAF class that should be used with the RACROUTE mechanism if volume authorization checking is active
CMDACC	Specifies whether or not command authorization checks should be performed on a client level
COMMTYPE	Specifies which communication method(s) LibraryStation uses to communicate with clients
CREQLOG	Enables/disables logging of network client mount/dismount requests
DEFER	Allows LibraryStation initialization to be deferred
HOSTID	Specifies the hostid of the HSC system where LibraryStation is executed
LSDEF	Provides the name of a data set that contains various LibraryStation definition statements
PDF	Specifies the data set name to be dynamically allocated as the Persistent Data File
PDFX	Specifies the data set name to be dynamically allocated as the path to the Persistent Data File alternate index
POOLCHK	Specifies whether or not volumes can be scratched when the wrong scratch pool is put in the network scratch request
REQTIME	Defines the amount of time after which LibraryStation drops messages waiting to be sent to clients
RETCOUNT	Defines the number of times that LibraryStation attempts to transmit a message across the network
RETTIME	Defines the minimum amount of time that LibraryStation waits between attempts to establish a network connection
SYMDESTN	Specifies the symbolic destination name that contains the transaction program name and local logical unit name that LibraryStation uses to register with APPC/MVS for SNA LU6.2 communication.
TCPNAME	Specifies any StorageTek compatible TCP/IP communications product
TCPPORT	Specifies a TCP port used for TCP/IP communications.
VOLACC	Specifies whether or not volume authorization checks should be performed on a client level
VOLAUTH	Specifies whether or not volume authorization checks should be performed on a network level
VOLNOPRF	Specifies, for users of RACF and VOLAUTH, whether or not volumes undefined to RACF may be accessed by network clients
VSECLOG	Specifies whether or not message SLS3945I is issued to the system log when access to a volume is denied

TABLE 2-2 LSINIT Keyword Parameters (Continued)

Keyword	Function
XCFGROUP	Specifies the XCF group name representing the XCF group that LibraryStation uses to register with XCF
XCFMEMBR	Specifies the XCF member name representing the XCF member that LibraryStation uses to register with XCF
XHREC	Enables cross host recovery support

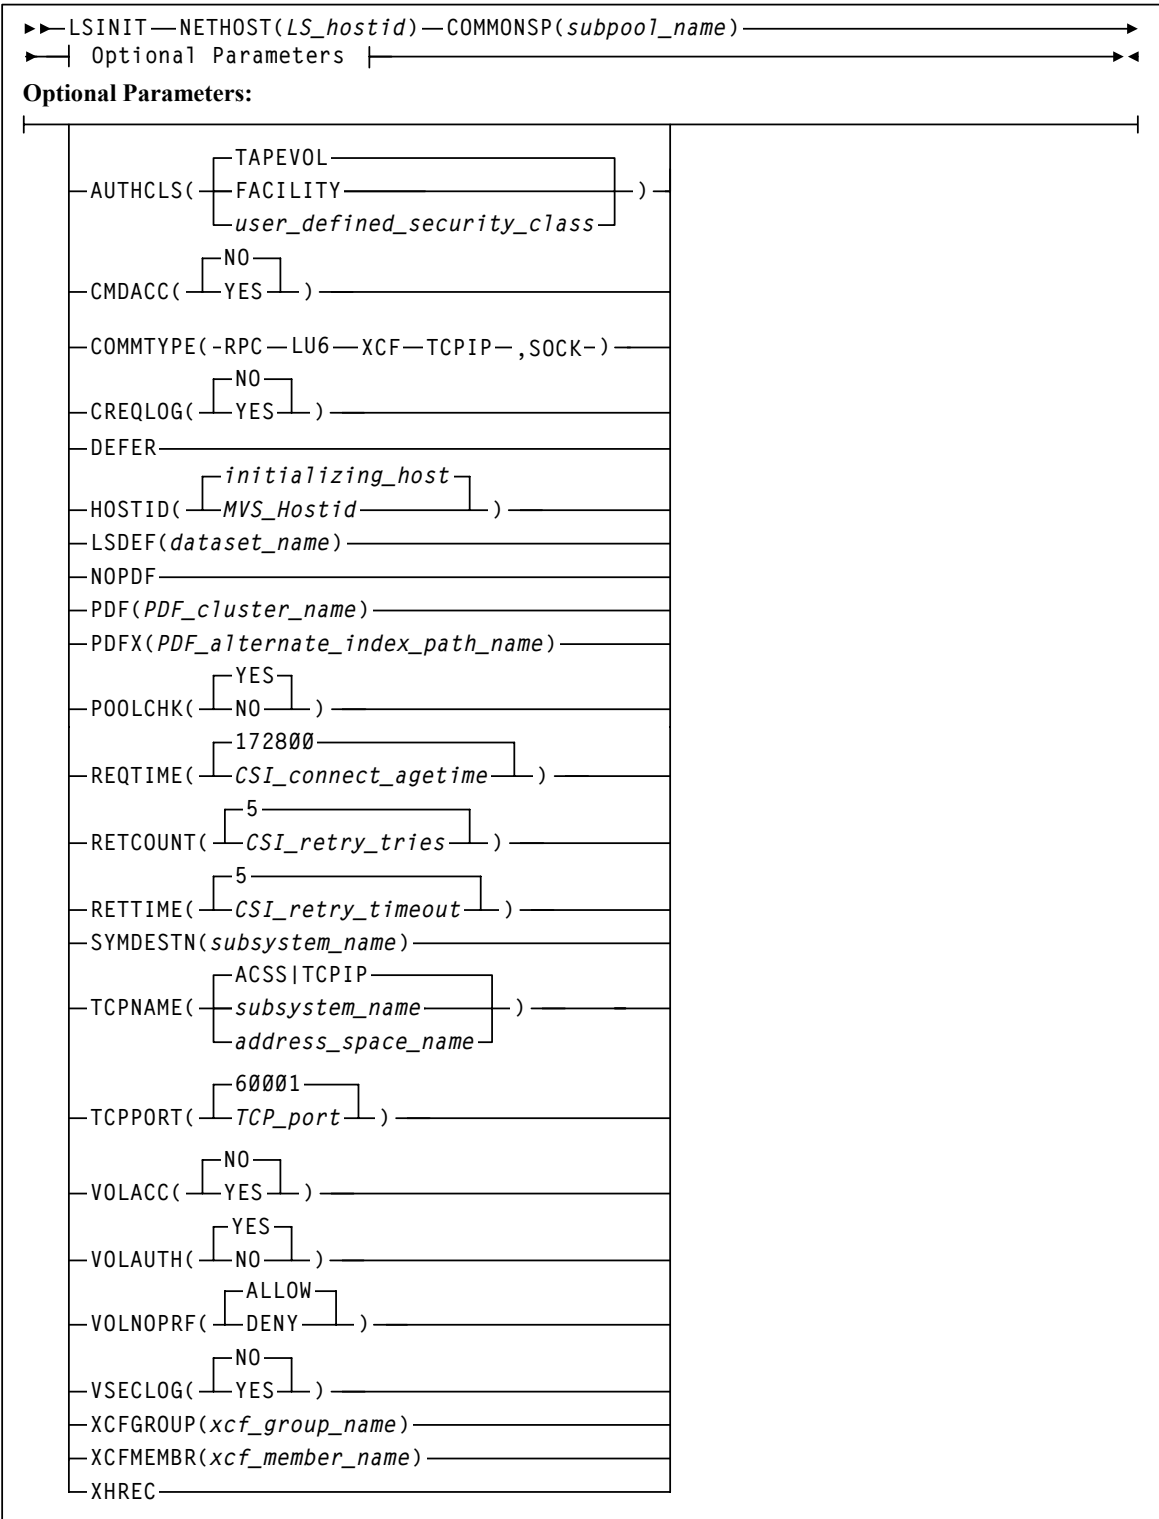


FIGURE 2-12 LSINIT Control Statement Syntax

Note –

- NETHOST and COMMONSP are the only required parameters for all installations. All others are optional, with one exception: NOPDF is required in sysplex environments (see [“Required Keyword Parameters of LSINIT” on page 48](#)).
 - You can separate parameters using either blanks or commas.
 - See [“Conventions for Reader Usability” on page xxvi](#) for flow diagram and control statement syntax conventions.
-

Required Keyword Parameters of LSINIT

The required keyword parameters for the LSINIT control statement are:

NETHOST(*LS_hostid*)

Specifies the LibraryStation hostid to which network drives are attached. This parameter is required.

The hostid identified here is supplied to the HSC via the LIBGEN process (see [“Configuring the LibraryStation Hostid” on page 37](#)). The tape cartridge drives that LibraryStation uses are also identified as being attached to this hostid through the HSC LIBGEN process. LibraryStation specifies this hostid to the HSC for network drive requests.

Note –

- Your entry must match the LibraryStation hostid you defined in [“Configuring the LibraryStation Hostid” on page 37](#).
 - See [“Configuring Security Measures” on page 21](#) for information about how this parameter can affect LibraryStation security.
-

COMMONSP(*subpool_name*)

Specifies the HSC scratch subpool name to be used as the default scratch pool. This parameter is required.

The SCRPOOL control statement in the HSC PARMLIB is used to define the subpool name and the range of volsers contained in the scratch subpool. For example, the HSC PARMLIB might contain the following definition for the LibraryStation common scratch pool:

```
SCRPOOL NAME=LSPOOL, RANGE=(085000-089999) , LABEL=SL
```

LSINIT would then require the keyword parameter COMMONSP(LSPOOL).

SCRPOOL control statements can also be specified using the HSC SCRPFDEF command and control statement. Refer to the *HSC System Programmer's Guide* for more information about SCRPFDEF.

Note – If SCRPFDEF statements are included in the HSC PARMLIB, they **must precede** the LSINIT statement.

If you want to map additional LibraryStation scratch pools to HSC subpools, use the LSDEF SPNUM statement to map scratch pools other than 0. See [“Scratch Pool Processing” on page 32](#).

See [“Configuring Security Measures” on page 21](#) for information about how the COMMONSP parameter can affect LibraryStation security.

NOPDF

Disables the Persistent Data File (PDF). This keyword **must** be specified by sysplex installations servicing only MVS/CSC clients using XCF or LU6.2. When the NOPDF keyword is specified, the PDF is disabled. This operational environment would contain multiple LibraryStation programs running in a sysplex environment and servicing only MVS/CSC clients.

It is possible to provide heterogeneous support for non-MVS/CSC clients within a sysplex environment. In this type of installation, you must allocate a PDF for one LibraryStation and specify the NOPDF keyword in the LSINIT control statement for all other LibraryStations.

If the NOPDF keyword is not specified, LibraryStation runs with a PDF enabled and allows clients to issue locking requests. This environment involves a single LibraryStation program running in a sysplex environment.

If the NOPDF keyword is specified, you cannot specify the PDF or PDFX keywords. The default is running with a PDF.

Optional Keyword Parameters of LSINIT

The optional keyword parameters for the LSINIT control statement are:

AUTHCLS([TAPEVOL | FACILITY | *user_defined_security_class*])

This parameter is optional. TAPEVOL is the default. It specifies the SAF class to be used with the RACROUTE mechanism if volume authorization or volume access is active. Volumes to be protected should be defined as entities in the specified SAF class. The customer can define a new security authorization class for tape volumes. If the customer does so, note that the class must be defined to the security package, added to the user SAF routing table, and activated. If all these steps are not completed, all volumes can be accessed by all clients. It is recommended that you use the VSECLOG parameter to create system log messages along with test volumes defined to the new security class to verify that volume security is working as desired.

The value for the *user_defined_security_class* parameter must consist of four to eight characters. TAPEVOL or FACILITY can't be specified for this value, though derivatives of these words are valid. See [“Configuring Security Measures” on page 21](#) for more information on configuring security measures.

CMDACC([NO | YES])

Specifies whether command authorization checks should be performed at a client level. These checks are issued through an IBM RACROUTE request to the System Authorization Facility (SAF). The default value is NO.

See [“Configuring Security Measures” on page 21](#) for information about how this parameter can impact LibraryStation security.

COMMTYPE(RPC LU6 XCF TCPIP)

Specifies which communication method LibraryStation uses to communicate with clients. The method can be RPC, LU6, XCF, or TCPIP. If more than one is selected, separate them with a space or comma.

- *RPC* is specified if LibraryStation will communicate with ONC/RPC clients only.
- *LU6* is specified if LibraryStation will communicate with SNA LU6.2 clients only.
- *XCF* is specified if LibraryStation will communicate with XCF clients.
- *TCPIP* is specified if LibraryStation will communicate with clients that support CSCI communications using TCP/IP communication method.

If the COMMTYPE keyword is not specified, the default is RPC.

CREQLOG(YES|NO)

Specifies whether or not network client mount/dismount requests are logged. If YES is specified, logging is enabled and message SLS3730I is displayed. This message identifies the network id and client userid of the client that issued the request. In addition:

- If the VOLACC LSINIT parameter is set to YES, message 3728I is displayed.

Note – VOLACC(YES) is supported only when COMMTYPE is specified as RPC or LU6.

- If the VOLAUTH LSINIT parameter is set to YES, message 3729I is displayed. If the CREQLOG LSINIT parameter is set to NO, logging is disabled and no messages are displayed. The default is NO.

DEFER

Specifies that LibraryStation initialization is to be deferred at HSC initialization. If XHREC is also specified on the LSINIT statement, LibraryStation initializes to standby status.

LibraryStation can be started by issuing the LS INIT command. LibraryStation in standby mode can also be started by issuing the LS ACTIVATE STANDBY command or by cross host recovery communication.

See [“LSINIT Implications for Multiple MVS Host Installations” on page 56](#) for more information about situations where you may need to use DEFER.

When DEFER is not specified, LibraryStation is initialized automatically during HSC initialization.

HOSTID(MVS_hostid)

Specifies the hostid of the MVS host system on which LibraryStation is executed. This host identifier is specified to the HSC via the LIBGEN process. The default is the initializing HSC hostid.

Note – In a multiple MVS host configuration, this parameter determines which host will initialize LibraryStation. If you are making LibraryStation available to more than one host system, see [“LSINIT Implications for Multiple MVS Host Installations” on page 56](#) for more information about multiple host installation planning.

LSDEF(dataset_name)

Specifies the name of a data set that contains various LibraryStation definition statements. The name must be fully qualified and cataloged. If the data set named is a partitioned data set, the member name must also be included and the data set name should be enclosed in single quotation marks. Comment statements beginning with an asterisk in column one are not valid.

See [“Configuring the LSDEF Data Set” on page 58](#) for information about the statements that can be contained in the data set.

PDF(*PDF_cluster_name*)

Specifies the data set name to be dynamically allocated as the Persistent Data File. If PDF is specified, PDFX must also be specified. See [“Allocating the Persistent Data File” on page 35](#) for a description of the Persistent Data File.

PDFX(*PDF_alterate_index_path_name*)

Specifies the data set name to be dynamically allocated as the path to the Persistent Data File alternate index. If PDFX is specified, PDF must also be specified. Be sure to specify the path name to the alternate index and not the name of the alternate index itself. See [“Allocating the Persistent Data File” on page 35](#) for a description of the Persistent Data File alternate index.

POOLCHK([YES | NO])

Specifies whether a volume can be used as a scratch volume when the wrong scratch pool is specified in the request for a scratch volume. If YES is specified, the volume is checked to see if it can be made a scratch volume and assigned to the indicated scratch pool. If NO is specified, the volume is used as a scratch volume even if the scratch pool specified in the request is not the scratch pool the volume is assigned to through the HSC SCRPOOL statement. The default is YES.

REQTIME(*CSI_connect_agerime*)

Defines the amount of time (in seconds) after which LibraryStation drops messages waiting to be sent to clients. This parameter is specified only if COMMTYPE is specified as RPC.

The value for REQTIME can be any decimal integer in the range 600 - 31536000. Thus, the maximum is one year. If the value specified is outside this range, REQTIME defaults to 172800 seconds (48 hours). When an invalid REQTIME value is specified using the SET operator command, the last valid REQTIME value is used.

RETCOUNT(*CSI_retry_tries*)

Defines the number of times LibraryStation attempts to transmit a message across the network. This parameter is specified only if COMMTYPE is specified as RPC.

The value for RETCOUNT can be any decimal integer in the range 0 - 999999999. The default value is 5. Network clients should have a similar retry parameter.

RETTIME(*CSI_retry_timeout*)

Defines the minimum amount of time (in seconds) that LibraryStation waits between attempts to establish a network connection. This parameter is specified only if COMMTYPE is specified as RPC.

The value for RETTIME can be any decimal integer in the range 0 - 999999999. The default value is 5 seconds. Network clients should have a similar timeout parameter.

SYMDESTN(*subsystem_name*)

Specifies the symbolic destination name that contains the transaction program name and local logical unit name that LibraryStation uses to register with APPC/MVS for SNA LU6.2 communication. The symbolic destination name must be the name of an entry in the active APPC/MVS side information file that represents LibraryStation. This parameter is used only if COMMTYPE is specified as LU6.

If the SYMDESTN keyword is not specified, the default is LIBSTAT.

See [“APPC/MVS Configuration” on page 19](#) for information about how the side information entry is built.

TCPNAME([*subsystem_name* | *address_space_name*])

Specifies the subsystem name or address space name of the TCP/IP stack used for TCP/IP communications. Valid TCP/IP communications software includes IBM TCP/IP, CA Unicenter TCPAccess Communications Server, and CA Unicenter TCPAccess X.25. This parameter is specified only if COMMTYPE is specified as RPC or TCPIP.

subsystem_name specifies the subsystem name of the TCP/IP stack that was specified during installation of the TCP/IP communications software. It must consist of one to four alphanumeric or national (#, @, \$) characters, the first character being alphabetic or national.

address_space_name specifies the address space name of the TCP/IP stack that was specified during the installation of the TCP/IP communications software. It must consist of one to eight alphanumeric or national characters.

If TCPNAME is specified, its value is used assuming it is valid. If not specified, the default value (ACSS or TCPIP) is assumed:

- ACSS is the default value for CA Unicenter TCPAccess Communications Server or CA Unicenter TCPAccess X.25.
- TCPIP is the default value for IBM TCP/IP.

Note – The LCFSSID keyword parameter is no longer supported by LibraryStation. Using this keyword will generate an error message.

Additionally, when the TCP/IP product specified with a TCPNAME parameter is not active, the following defaults are used:

- If the TCPLINK data set is included in the STEPLIB concatenation, TCPAccess with a default TCPNAME value of ACSS is used.
- If the TCPLINK data set is not included in the STEPLIB concatenation, IBM TCP/IP with a default TCPNAME value of TCPIP is used.

TCPPORT(*TCP_port*)

Specifies a TCP port used for TCP/IP communications. This parameter is specified only if COMMTYPE is specified as RPC or TCPIP.

The value for TCPPORT must be between 1 and 65535. If the value specified is outside this range, TCPPORT takes the default value. The default value is 60001.

VOLACC([NO | YES])

Specifies whether volume authorization checks should be performed on a client level. These checks are issued through the IBM RACROUTE request to the System Authorization Facility (SAF). The default value is NO. For clients to use any volumes with VOLACC(YES), you must have LSDEF CLIENTID statements for those clients.

See [“Configuring Security Measures” on page 21](#) for information about how this parameter can impact LibraryStation security.

VOLNOPRF([ALLOW | DENY])

Specifies whether volumes not defined to RACF are allowed client read and update access. ALLOW is the default. Either VOLAUTH(YES) or VOLACC(YES) is required for the VOLNOPRF parameter to take effect.

VOLAUTH([YES | NO])

Specifies whether volume authorization checks should be performed on a network level. These checks are issued through the IBM RACROUTE request mechanism to the System Authorization Facility (SAF). The default value is YES.

See [“Configuring Security Measures” on page 21](#) for information about how this parameter can impact LibraryStation security.

VSECLOG([NO | YES])

This parameter is optional. It specifies whether message SLS3945I is issued to the system log when access to a volume is denied. NO is the default. Either VOLACC and/or VOLAUTH must be set to YES for this message to be issued.

XCFGROUP(*xcf_group_name*)

Specifies the XCF group name representing the XCF group LibraryStation uses to register with XCF. One group should be defined for each active LibraryStation and MVS/CSC using XCF. The group name must be one to eight characters (A-Z, 0-9, \$, #, @). However, to avoid using names IBM uses for its XCF groups, avoid A-I or the character string SYS, and do not use the name UNDESIG, which is reserved for the system programmer.

This parameter requires that COMMTYPE(XCF) is also specified.

XCFMEMBR(*xcf_member_name*)

Specifies the XCF group member name representing the XCF member LibraryStation uses to register with XCF. The number of members depends on the number of LibraryStations and MVS/CSCs. The member name must be one to 16 characters (A-Z, 0-9, \$, #, @).

This parameter requires that COMMTYPE(XCF) is also specified.

XHREC

Specifies that cross host recovery be enabled. If XHREC is specified, PDF must also be specified. Only one active LibraryStation can act as a server for open system clients. Cross host recovery allows other LibraryStations to be started as standby servers for the open system clients. The first standby LibraryStation to begin initialization becomes the active LibraryStation. Subsequent LibraryStations initialize to standby status.

If the active LibraryStation terminates, a cross host communication is sent to all HSCs sharing the CDS. The first standby LibraryStation to initialize becomes the active LibraryStation. All LibraryStations that wish to access the PDF and participate in cross host recovery must specify XHREC.

Enter your LSINIT parameters on the LibraryStation Configuration Worksheet in [Appendix A](#).

LSINIT Implications for Multiple MVS Host Installations

Note – The following applies to heterogeneous LibraryStation installations only; it does not apply to MVS sysplex installations using XCF.

As previously described in “[System Redundancy Options](#)” on page 13, LibraryStation can be made available to more than one MVS host in a library complex, either by installing the software directly on each host or by installing it on DASD that is shared among the hosts.

Making LibraryStation available to more than one host is useful for system redundancy, so that LibraryStation software can be manually initiated from an alternate host if the host that normally initiates LibraryStation fails.

Each host that is capable of initializing LibraryStation to support ONC/RPC clients must have the HSC, TCP/IP, and network interface adaptor installed in addition to the LibraryStation software. Additionally, the hosts must access a common PARMLIB data set.

Each host that is capable of initializing LibraryStation to support SNA LU6.2 clients must have the HSC, APPC/MVS, and physical and logical units installed in addition to the LibraryStation software.

The HOSTID, XHREC, and DEFER parameters on the LSINIT control statement determine how LibraryStation is initialized:

- automatically to active status when the HSC is initialized on that host
- automatically to standby status
- deferred until the LSINIT command is issued

The HOSTID parameter in an LSINIT control statement for each host system determines whether LibraryStation can be initialized from that host.

The XHREC parameter enables cross host communication. The first LibraryStation to initialize becomes active. Subsequent LibraryStations initialize to standby status.

The DEFER parameter defers LibraryStation initialization to active status. When XHREC is also specified, LibraryStation initializes to standby status.

The following scenarios illustrate how this works.

- Scenario #1: A single host that is automatically initialized.

```
LSINIT NETHOST(LSID) COMMONSP(SP01) HOSTID(MVS1)
```

In this scenario, LibraryStation is initialized automatically on host MVS1 when the HSC is initialized on that host.

- Scenario #2: Two hosts, with the second host serving as an alternate host.

```
LSINIT NETHOST(LSID) COMMONSP(SP01) HOSTID(MVS1) DEFER
LSINIT NETHOST(LSID) COMMONSP(SP01) HOSTID(MVS2) DEFER
LSINIT HOSTID(MVS1)
```

In this scenario, initialization is deferred for both hosts at HSC initialization. LibraryStation is then initialized on host MVS1 by the LS INit operator command. If host MVS1 fails, host MVS2 can be initialized by an LS INit command issued by the MVS operator at that host system. Scenario #2 also applies to a situation where there are more than two hosts but only the first two are capable of initializing LibraryStation. Since there are no LSINIT statements created for MVS3, MVS4, and so on, those host systems cannot initialize LibraryStation.

Note – Even though you can enable LibraryStation to initialize on more than one host, it can only be fully initialized on one host system at a time. Also, each host that is capable of initializing LibraryStation must have access to the DASD volume where the Persistent Data File (PDF) is located.

If you enable LibraryStation to initialize on more than one host, you are responsible for propagating the SYSTEMS ENQ to each host. Failure to do so may corrupt the PDF when an alternate host is initialized or if two hosts attempt to initialize the software at the same time.

See [“The PDF in a Multiple Host Environment” on page 36](#) for more information about PDF requirements in a multiple host environment.

Configuring the LSDEF Data Set

Defining LSDEF File Statements

The LSDEF data set contains various LibraryStation definition statements. Valid LSDEF statements for LibraryStation use are described below. Each statement can be included as many times as necessary to define all existing items. For example, there can be an SPNUM statement for each scratch pool.

LSDEF statements are only required in the LSDEF data set under the following circumstances:

- CLIENTID statements are required if you are using volume access control or command access control.
- SPNUM statements are required if you are using scratch pools other than pool number 0 or mapping scratch pools by client.


Note –

- Virtual Storage Manager (VSM) support has been added for the LSDEF data set. For more information, refer to the “LibraryStation Enhancements and Additions for VSM” chapter in the *VTCS Command and Utility Reference*.
 - UNITATTR LSDEF statements are no longer required in the LSDEF data set. LibraryStation will ignore these statements.
 - You can include non-LibraryStation statements (e.g., HSC VOLATTR) in the LSDEF data set, but LibraryStation will ignore these statements.
-

CLIENTID Statement

The CLIENTID statement associates a client to a System Authorization Facility (such as RACF) user identifier.

Note – The CLIENTID statement is supported only when COMMTYPE is specified as RPC or LU6.

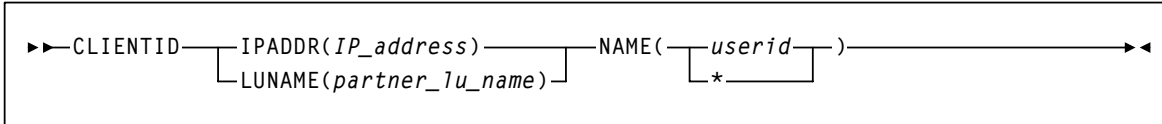

IPADDR(*IP_address*)

Specifies the Internet address of the primary local area network (LAN) or server. The Internet address is in standard Internet dotted decimal format (for example, 128.2.33.9). Valid values can range from 0 to 255.

LUNAME(*fully_qualified_partner_lu_name*)

Specifies the logical unit name of the client that communicates with LibraryStation. Specify this keyword value in the format NETID.LUNAME. The value can consist of 3 to 17 alphanumeric characters (including the decimal).

NAME(*userid* | *)

Specifies the userid that determines if the client is permitted access to the resource. The NAME value can consist of one to eight alphanumeric characters or *. If the value is specified as *, the IPADDR or LUNAME is not translated and whatever value is in the packet in the access_id field is used for authorization checks.

Either IPADDR or LUNAME must be specified.

This association is only used when either the VOLACC or CMDACC parameter of the LSINIT statement is set to YES.

When the same client address is specified on more than one CLIENTID statement, the last statement is used. When the same userid is specified on more than one CLIENTID statement, all associated clients use the same userid.

See [“Configuring Security Measures” on page 21](#) for additional information about LibraryStation security measures.


Enter your CLIENTID parameters on the LibraryStation Configuration Worksheet in [Appendix A](#).

SPNUM Statement

This statement equates an HSC scratch subpool with a LibraryStation scratch pool.

Note –

- Virtual Storage Manager (VSM) support has been added for the SPNUM statement. For more information, refer to the “LibraryStation Enhancements and Additions for VSM” chapter in the *VTCS Command and Utility Reference*.
 - The SPNUM statement is supported only when COMMTYPE is specified as RPC or LU6.
-

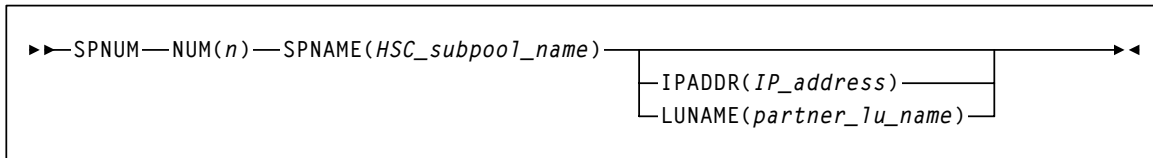

NUM(n)

Specifies the numeric LibraryStation scratch pool to which the HSC scratch subpool defined with a SCRPOOL command is equated to. `n` can have values from 0 to 65534.

SPNAME(HSC_subpool_name)

Specifies the name of the HSC scratch subpool that is to be equated to the LibraryStation scratch pool. The SPNAME value can consist of 1 to 13 characters. Blank spaces are not permitted.

IPADDR(IP_address)

Specifies the Internet address of the primary local area network (LAN) or server. The Internet address is in standard Internet dotted-decimal format (for example, 128.2.33.9). Valid values can range from 0 to 255.

LUNAME(fully_qualified_partner_lu_name)

Specifies the logical unit name of the client that communicates with LibraryStation. Specify this keyword value in the format NETID.LUNAME. The value can consist of 3 to 17 alphanumeric characters (including the decimal).

There can be several SPNUM statements, each equating an HSC scratch subpool to a LibraryStation scratch pool. If the same value for NUM is specified on more than one SPNUM statement, the last statement is used. If the same HSC scratch subpool name is specified on more than one SPNUM statement, all the associated LibraryStation scratch pools will use the same HSC scratch subpool.

If IPADDR or LUNAME is coded, only requests from the specified client will use that scratch pool mapping. See “Scratch Pool Processing” on page 32 for information about scratch pools.

Example:

```
SPNUM NUM(2) SPNAME(LSPOOL1)
SPNUM NUM(2) SPNAME(LSPOOL2) IPADDR(1.2.3.4)
```

In this example, the client at address 1.2.3.4 would get volumes from LSPOOL2 when referring to pool 2, and all other clients would get volumes from LSPOOL1.

Enter your SPNUM parameters on the LibraryStation Configuration Worksheet in [Appendix A](#).

Allocating the LSDEF Data Set

Once LSDEF statements are defined, you must allocate, catalog, and populate the LSDEF data set. This data set can be a sequential data set or a member of a partitioned data set (PDS).

Perform the following steps:

1. Use the following sample code to allocate and catalog the LSDEF data set.

```
// EXEC PGM=IEFBR14
//LSDEFDD DD DSN=SLS.LSDEF ,
// UNIT=SYSDA,SPACE=(TRK,(1,1)),
// DCB=(RECFM=FB,LRECL=80,BLKSIZE=3120),
// DISP=(NEW,CATLG)
```

FIGURE 2-13 Sample LSDEF Data Set Allocation

2. Populate the data set with the LSDEF statements you defined earlier in this chapter. Refer to the statement information you entered on the LibraryStation Configuration Worksheet in [Appendix A](#).

Configuring the HSC Started Task Procedure

You must update the started task procedure in your system cataloged procedure library to include the LibraryStation load libraries, and if applicable, the Persistent Data File (PDF) DD statements. (Alternately, the PDF and PDFX data files can be allocated dynamically at system initialization by using the PDF and PDFX parameters of the LSINIT statement.)

Note –

- If you are a sysplex installation servicing only MVS/CSC clients using XCF or LU6.2, you will only include the LibraryStation load libraries because the PDF is disabled for your installation.
 - The LibraryStation (SLCLINK) DD statement **must precede** the HSC (SLSLINK) data set in the STEPLIB concatenation.
 - If you are using VSM, you must include the VTCS LINKLIB (SWSLINK). The SWSLINK DD statement **must precede** the HSC (SLSLINK) data set in the STEPLIB concatenation. Refer to the publication *Installing and Configuring VTCS* for more information.
-

The following example represents the base JCL shipped in the LibraryStation SAMPLIB.

```
//SLS0      PROC
//IEFPROC   EXEC PGM=SLSBINIT,
//          TIME=1440,
//          REGION=6M,
//          DPRTY=(7,5),
//          PARM='E(E086) F(23) M(00) SSYS(SLS0)'
//*
//STEPLIB   DD      DISP=SHR,DSN=SLC.SLCLINK /* LS load mods */
//          DD      DISP=SHR,DSN=SLS.SLSLINK /* HSC load mods */
//          DD      DISP=SHR,DSN=SLC.SACLINK /* SAS/C load mods */
//          DD      DISP=SHR,DSN=SLC.CSSLINK /* SAS/C CSL API */
//*
//SLSPDF    DD      DISP=OLD,DSN=cluster_name
//SLSPDFX   DD      DISP=OLD,DSN=path_name
//SLSSYS00  DD      DISP=SHR,DSN=SLS.PARMS
//SLSUEXIT  DD      DISP=SHR,DSN=your.load.module.library

sysplex installations: DO NOT include the SLSPDF and SLSPDFX DDs.
```

FIGURE 2-14 Sample HSC Cataloged Procedure Updated for LibraryStation

Perform the following steps to update the started task procedure:

1. Add the LibraryStation load libraries, created during installation, to the STEPLIB DD concatenation. These include the SLCLINK and SACLINK load libraries.
2. The STEPLIB concatenation can dictate which TCP/IP communication stack is used for LibraryStation. If CA Unicenter TCPAccess TCP/IP products are to be used, the TCPLINK data set must be included. Add the following DD statement to the STEPLIB concatenation:

```
DD DSN=IOS.TCPLINK,DISP=SHR /* optional TCP */
```

Note – The TCPLINK data set must precede the SACLINK data set in the STEPLIB concatenation.

3. If you are using a TCP/IP product to support ONC/RPC clients, add the following DD statement to the HSC Started Task Procedure:

```
//SYSTCPD DD DSN=ddd.eee.fff(aname)
```

This DD statement identifies the data set used to obtain parameters defined by the IBM TCPIP.DATA configuration data set. See [“ONC/RPC Support” on page 16](#) for more information.

4. If you are NOT a sysplex installation servicing only MVS/CSC clients using XCF or LU6.2, add the two DD statements required for the Persistent Data File, SLSPDF and SLSPDFX. To do this, replace *cluster_name* and *path_name* in the started task procedure with the same data set names you used for *cluster_name* and *path_name* in the PDF.

Note – Alternately, the PDF and PDFX data sets can be allocated dynamically at system initialization by using the PDF and PDFX parameters of the LSINIT statement. See [“Configuring the LSINIT Control Statement” on page 44](#) for more information.

5. Verify that REGION=6M or more in the IEFPROC of your started task procedure.
6. If SNA LU6.2 clients are to be supported, LibraryStation requires modules that reside in the MVS data set SYS1.CSSLIB. If SYS1.CSSLIB is not in your installation’s link list, add it to the STEPLIB DD concatenation. SYS1.CSSLIB must be an authorized data set.

Reconfiguring the HSC LIBGEN

Earlier, in [“Configuring the LibraryStation Hostid” on page 37](#) you modified the HSC LIBGEN in order to define the LibraryStation hostid.

However, these and any other HSC LIBGEN modifications are not effective until you reconfigure the LIBGEN. Reconfiguring the LIBGEN creates a new library control data set. This is accomplished with the MVS Start command, using the Reconfig parameter to start the HSC catalog procedure.

Refer to the *HSC Configuration Guide* for detailed information about reconfiguring the HSC LIBGEN.

Note – Some versions of the *HSC System Programmer’s Guide* state that library station device numbers can be set using the HSC Set Utility with the SLISTATN option. This is a generic reference to LMU station device numbers and is **not** a reference to the LibraryStation product. LibraryStation device numbers **cannot** be set using the SLISTATN option of the HSC Set utility.

Verifying LibraryStation Configuration

Once you have completed the LibraryStation configuration tasks, you can start the LibraryStation software. See [“Starting LibraryStation” on page 117](#) for more information.

Once LibraryStation is started, you can verify LibraryStation configuration settings; the CPA, TCP/IP, and LAN as well as basic LibraryStation operation. Perform the following steps:

Step 1: CPA, TCP/IP, and LAN Verification

Successful installation of the TCP/IP communication product, CPA, and LAN can be verified by initiating commands from other processors on the LAN. These commands could include PING and RPCINFO, which are typically implemented on LAN-connected processors.

- A PING command executed as

```
PING host
```

(where *host* is the name or Internet address of the MVS processor where LibraryStation will execute) should receive a response such as “host is active.”

- An RPCINFO command executed as

```
RPCINFO -P host
```

(where *host* is the name or Internet address of the MVS processor where LibraryStation will execute) should receive two or more responses indicating RPC program numbers, versions, protocols, and port numbers for registered RPC programs. When LibraryStation is active, its program number (300031) will be displayed.

Step 2: LibraryStation Verification

Use the SLGDIAG installation verification program to verify basic operation of LibraryStation independent of network or client activity. SLGDIAG generates basic query, mount, and dismount requests to LibraryStation. When SLGDIAG has executed successfully, LibraryStation is considered to be ready for operation.

See [“SLGDIAG Installation Verification Program” on page 106](#) for more information about the SLGDIAG installation verification program.

Commands

Overview

Operator interactions in a LibraryStation environment include LibraryStation operator commands, HSC operator commands, and TCP/IP operator commands:

- LibraryStation operator commands are described in this chapter.
- HSC operator commands are described in the *HSC Operator's Guide*.
- TCP/IP commands are described in the documentation provided by your TCP/IP vendor.

LibraryStation operator commands provide an interface for the MVS operator to start, stop, and control LibraryStation processing. This includes canceling active requests and displaying status of entries within LibraryStation.

Relationship to HSC Commands

For LibraryStation network functions not specifically implemented as LibraryStation operator commands, there are HSC commands that perform the necessary functions, such as Mount.

LibraryStation commands are distinguished from HSC commands by the letters LS in front of the command (such as **LS START**). The command string is preceded by a site-dependent initial prefix character, such as a period. LibraryStation uses the prefix character that is defined for HSC commands in the HSC LIBGEN.

LibraryStation commands can be entered using any of the allowable HSC command formats, such as:

```
.LS START
.LS,START
.LS  START
.LS,  START
F HSC0,LS START
```

Syntax is checked when a LibraryStation command is issued by the MVS operator. If the syntax is incorrect, an error message is generated. See [Chapter 6, “Messages and Codes”](#) for specific message information.

LibraryStation Command Summary

LibraryStation commands are summarized in the following table. Note that commands in this table are shown in mixed case; lower case letters may be omitted to form abbreviations (such as “STO” for the STOp command and “S” for the Start command).

TABLE 3-1 LibraryStation Operator Command Summary

Command	Function
Activate Standby	Notifies standby LibraryStations to begin initialization
Cancel	Stops processing of a LibraryStation client request or operator command
CLrlock	Removes all active and pending locks from a library drive.
Display CCommand	Displays online help for specific LibraryStation commands
Display DRive	Displays the status of drives that are attached to the network served by LibraryStation
Display Request	Displays the status of all or specified active LibraryStation client requests and operator commands
Display Status	Displays the status of LibraryStation processing Idle Quiesces LibraryStation client request and operator command processing
Idle	Quiesces LibraryStation client request and operator command processing
INit	Initializes LibraryStation in the HSC address space
SEt	Changes certain LSINIT parameter values
Start	Changes LibraryStation from quiesced to fully functional
STOp	Terminates LibraryStation processing in the HSC address space
Trace	Traces LibraryStation processes
Vary DRive	Changes the state of a library drive to be available or unavailable to LibraryStation

Online Help for LibraryStation Commands

Similarly to HSC, online help is available for LibraryStation commands. The LS Display Cmd operator command is used to display information about specific LibraryStation commands. For example:

```
LS DISPLAY CMD (START)
```

or

```
LS DISPLAY COMMAND (START)
```

displays information about the LS Start command.

These examples can also be abbreviated as follows:

```
LS D CM(S)
```

or

```
LS D CO(S)
```

Operating States

LibraryStation has three operating states. Other than during initialization, termination, or in standby status, LibraryStation is always in one of these states:

- RUN

LibraryStation is active. This is the normal operating state. Operator commands and client requests are accepted in this state.

- IDLE PENDING

LibraryStation is in the process of quiescing. This state is entered following the issuance of a LibraryStation Idle command by the operator or an Idle request from the client. Current client requests are processed in this state. Operator commands and certain client requests (Cancel, Idle, Query, Query_Lock, Start, and Vary) are accepted in this state. A LibraryStation Start command is required to return to RUN state from the IDLE PENDING state.

- IDLE

LibraryStation has quiesced. This state is entered after current client requests are processed in the IDLE PENDING state following the issuance of a LibraryStation Idle operator command or client request. Operator commands and certain client requests (Cancel, Idle, Query, Query_Lock, Start, and Vary) are accepted in this state. A LibraryStation Start command is required to return to RUN state from the IDLE state.

The current operating state is identified when the Display Status operator command or Query Server client request is issued.

See [Chapter 5, “Starting and Stopping LibraryStation”](#) for information about starting and stopping the LibraryStation software.

Command Descriptions

This section describes LibraryStation commands. Syntax, parameter descriptions, and examples are included for each command.

See [“Syntax Flow Diagrams” on page xxvii](#) for syntax flow diagramming conventions.

Activate Standby Command

The Activate Standby command notifies one or more LibraryStations in standby status to begin initialization. The first standby LibraryStation that starts initialization becomes active.

This command can be entered to any SLS subsystem with a LibraryStation in defer, standby, or active status.

Syntax

```
▶▶—LS—Activate—Standby—————▶▶
```

Parameters

Activate

initiates the Activate command.

Standby

indicates a standby LibraryStation is to be activated.

Example

```
.LS A S
```

This example requests that a standby LibraryStation become active.

Output

A message is sent to the console where the Activate Standby command was issued. In a sysplex environment, the response is issued to all consoles. For example:

```
SLS3382I Standby LibraryStations notified
```

Cancel Command

The Cancel command attempts to terminate a previous command or client application request. The specified request is stopped when LibraryStation receives the Cancel command. No attempt is made to undo any activity that was completed before the Cancel command was received.

The following requests may be cancelled:

- Eject
- Enter
- Lock
- Query
- Query_Lock
- Set_Scratch

Syntax

```
▶▶—LS—Cancel—ID(req-id)—————▶◀
```

Parameters

Cancel

initiates the Cancel command.

ID

indicates that a specific request is to be cancelled.

req-id

identifies the specific request to cancel. The valid range is 1-65535.

Example

```
.LS C ID(3128)
```

In this example, request 3128 is cancelled.

Output

Messages are sent to the console where the Cancel command was issued. In a sysplex environment, the response is issued to all consoles. For example:


```
SLS3412I Request 3128 not cancelled; request not active
SLS3448I Cancel of request 3488 scheduled
```

CLrlock Command

The CLrlock command removes all active and pending locks on a library drive. The lock identifier is not required.

The lock drive mechanism is used by network clients to serialize drive requests. The CLrlock command removes outstanding locks that cannot be removed using Open System Nearline Network protocol commands.

Syntax

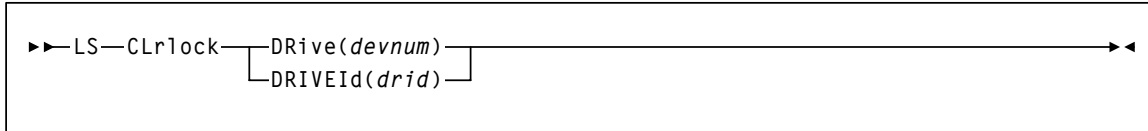

Parameters

CLrlock

initiates the CLrlock command.

DRive

specifies that all active and pending locks are to be removed for a device number.

devnum

identifies a specific drive number.

DRIVEId

specifies that all active and pending locks are to be removed for a driveid.

drid

identifies a specific driveid. Driveids are specified using the following format:

AA:LL:PP:NN

where:

- *AA* is the ACS number (00-7E hexadecimal)
- *LL* is the LSM number (00-23 hexadecimal)
- *PP* is the drive panel number within the LSM (1-10 decimal)
- *NN* is the relative drive number within the panel (0-19 decimal)

Note – When using the CLrlock command, ensure that the correct drive identifier is specified:

- If an incorrect identifier is used and a lock is removed from an unintended drive, problems may result and the client using the unintended drive may be forced to cycle their system.
 - If a CLrlock command is issued for an unintended drive currently being used by a client, that client may be forced to cycle their system. If the drive still fails to operate, you may need to issue the CLrlock command against it, and the client may need to cycle their system until the problem is resolved.
-

Examples

```
.LS CL DR(51F)
.LS CL DRIVEI(01:0F:10:2)
```

In these examples, all active and pending locks were removed for the following:

- Device number 51F
- Drive number-3 on panel-10, in LSM-0F, of ACS-01

Output

Messages are sent to the console where the CLrlock command was issued. In a sysplex environment, the response is issued to all consoles. For example:

```
SLS3473I Clearlock response
Drive (51F) (00:00:00:00) Status: all locks are cleared
```

In this example, all active and pending locks were removed for Device number 51F.

```
SLS3473I Clearlock response
Drive (000) (01:0F:10:2) Status: no locks found for resource
```

In this example, no locks were found for the third drive on panel-10, in LSM-F, of ACS-01.

```
SLS3473I Clearlock response
Drive 00:00:01:00 is not configured to LS
```

In this example, an invalid drive was entered.


See [Chapter 6, "Messages and Codes"](#) for additional information about specific messages displayed.

Display DRive Command

The Display Drive command displays the status of the drives that are attached to the network served by LibraryStation.

Note – References to library drives in LibraryStation commands refer only to the drives as viewed from the network clients. For example, the LibraryStation Display Drive command does not display information about MVS-attached drives that are not known to the network client system.

Syntax

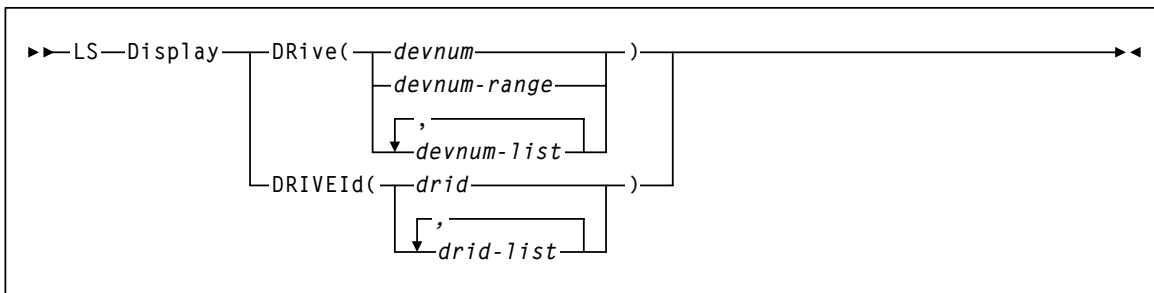

Parameters

Display

initiates the Display command.

DRive

specifies that drive status is requested for specific device numbers.

devnum or devnum-range or devnum-list

identifies one or more device numbers to display status for.

devnum-range is specified as two device numbers joined by a dash.

devnum-list elements may be either a single device number or a range of device numbers, with each list element separated by a comma or a blank.

Device numbers are defined in the HSC LIBGEN and are composed of three or four hexadecimal characters.

A range of numbers is valid for the *devnum* format only. The range may consist of 2 to 42 valid device numbers. If a range is specified, only existing LibraryStation-defined drives are reported. If no LibraryStation drives are defined in that range, an appropriate message is issued.

DRIVEId

specifies that drive status is requested for specific driveids.

drid or *drid-list*

identifies a single driveid or a list of driveids. Driveids can be specified using the following format:

AA:LL:PP:NN

where:

- *AA* is the ACS number (00-7E hexadecimal)
- *LL* is the LSM number (00-23 hexadecimal)
- *PP* is the drive panel number within the LSM (1-10 decimal)
- *NN* is the relative drive number within the panel (0-19 decimal)

Note – The “Drive Worksheet” on page 78 can be used to record site-specific information needed for this command.

Examples

```
.LS D DR(51F)
.LS D DR(51C-51F)
.LS D DR(51C,51D)
.LS D DRIVEI(01:0F:10:2)
```

In these examples, status is displayed for:

- Device number 51F
- A range of device numbers from 51C through 51F
- A list of device numbers 51C and 51D
- Drive number-3 on panel-10, in LSM-0F, of ACS-01

Output

Messages are sent to the console where the Display Drive command was issued. In a sysplex environment, the response is issued to all consoles. For example:


```
SLS3472I Display drive response
Drive (051F) (00:01:10:03) Type 4490 ONLINE, available
```

See [Chapter 6, “Messages and Codes”](#) for additional information about specific messages that are displayed.

Display Request Command

The Display Request command displays the status of all or selected active requests.

Syntax

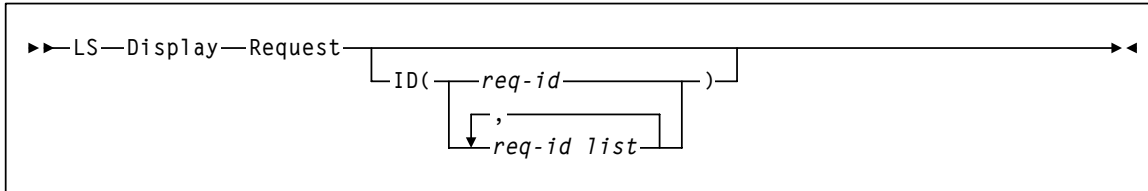

Parameters

Display

initiates the Display command.

Request

specifies that request status is to be displayed.

ID

indicates that a specific requestid to display follows. If ID is not specified, all active and pending requests are listed.

req-id or *req-id list*

specifies a single request number or a list of request numbers separated by a comma or a blank. The valid range is 1-65535.

Examples

```

  .LS D R
  .LS D R ID(2134)
  .LS D R ID(2135,2138,2150)
  
```

In these examples, the following requests are displayed:

- All requests are displayed
- Request 2134 is displayed
- Request 2135, 2138, and 2150 are displayed

Output

Messages are sent to the console where the Display Request command was issued. In a sysplex environment, the response is issued to all consoles. For example:

```

  SLS3469I Request status
  Request 02134: command QUERY status PENDING
  
```

See [Chapter 6, “Messages and Codes”](#) for additional information about specific messages that are displayed.

Display Status Command

The Display Status command displays the status of LibraryStation processing, including standby status and LibraryStation state (RUN, IDLE, or IDLE PENDING) and the number of current and pending requests for mounts, dismounts, enters, and ejects.

Syntax

```
▶▶—LS—Display—Status—————▶▶
```

Parameters

Display

initiates the Display command.

Status

specifies that LibraryStation status is to be displayed.

Example

```
.LS D S
```

This example displays LibraryStation status.

Output

Messages are sent to the console where the Display Status command was issued. In a sysplex environment, the response is issued to all consoles. For example:

```
SLS3468I Server status
Server is RUN
Mount(00/00) Dismount(00/00) Enter(00/00) Eject(00/00)
```

Message SLS3468I in the sample output indicates that LibraryStation is in RUN state. In other instances, this message can indicate IDLE PENDING or IDLE operating states. This message can also indicate that LibraryStation is initializing. See [“Operating States” on page 70](#) for descriptions of LibraryStation operating states.

Message SLS3468I in the sample output also indicates the number of current and pending requests for mounts, dismounts, enters, and ejects. The number to the left of “/” indicates current requests, while the number to the right of “/” indicates pending requests.

See [Chapter 6, “Messages and Codes”](#) for additional information about specific messages that are displayed.

Idle Command

The Idle command quiescs processing of LibraryStation network requests.

When Idle is issued, LibraryStation moves from RUN state to IDLE PENDING state, which indicates that LibraryStation is in the process of quiescing. All current client requests are completed when LibraryStation is in this state. Operator commands and some client requests (Cancel, Idle, Query, Query_Lock, Start, and Vary) are accepted in this state.

When all client requests have been processed in the IDLE PENDING state, LibraryStation enters IDLE state. In this state, LibraryStation has quiesced. Operator commands are accepted, as are the following client requests: Cancel, Idle, Query, Query_Lock, Start, and Vary.

Restarting LibraryStation After Idle

An LS Start command must be issued to return LibraryStation to its normal processing state (RUN) after an Idle command has been issued.

Use the LibraryStation Display Status command to display the current operating state.

Syntax

```
▶▶—LS—Idle—————▶▶
```

Parameters

Idle

initiates the Idle command.

Example

```
.LS I
```

This example quiescs LibraryStation request processing.

Output

Messages are sent to the console that issued the Idle command. In a sysplex environment, the response is issued to all consoles. For example:

```
SLS3919I LS is now idle  
SLS3404I IDLE command successfully executed  
SLS3422I IDLE is currently pending
```

See [Chapter 6, “Messages and Codes”](#) for additional information about specific messages that are displayed.

Output

Messages are sent to the console where the Init command was issued. In a sysplex environment, the response is issued to all consoles. For example:

```
SLS3350I LS initialization started (V6.2.0)
SLS3128I LM has been restarted; LM state is running
SLS3247I CSI network interface state active
SLS3352I LS initialization complete
```

See [Chapter 6, “Messages and Codes”](#) for additional information about specific messages that are displayed.

Set Command

The Set command changes the values of certain LSINIT control statement parameters. Any parameter changed with the Set command will only have its new value until HSC is restarted and the LSINIT command is reprocessed.

The PDF and PDFX values are for the dynamically allocated PDF and PDFX only. If you use the Set command to display the values for the PDF and PDFX and the values are reported to be undefined, then there is no dynamic allocation and the PDF and PDFX used are specified in the startup JCL.


After the SET Command

After the Set command is issued, the LibraryStation parameter will have the new value, and LibraryStation will begin using it. The LSDEF value is only checked when LibraryStation is initialized and doesn't take effect until LibraryStation is stopped and initialized again. However, if the HSC is restarted, this value is no longer in effect.

If the changes made by the Set command are to be permanent, changes equivalent to the Set command changes should be made to the LSINIT parameters.

To display the current value of the parameter, enter the Set command specifying the parameter without any options.

Syntax

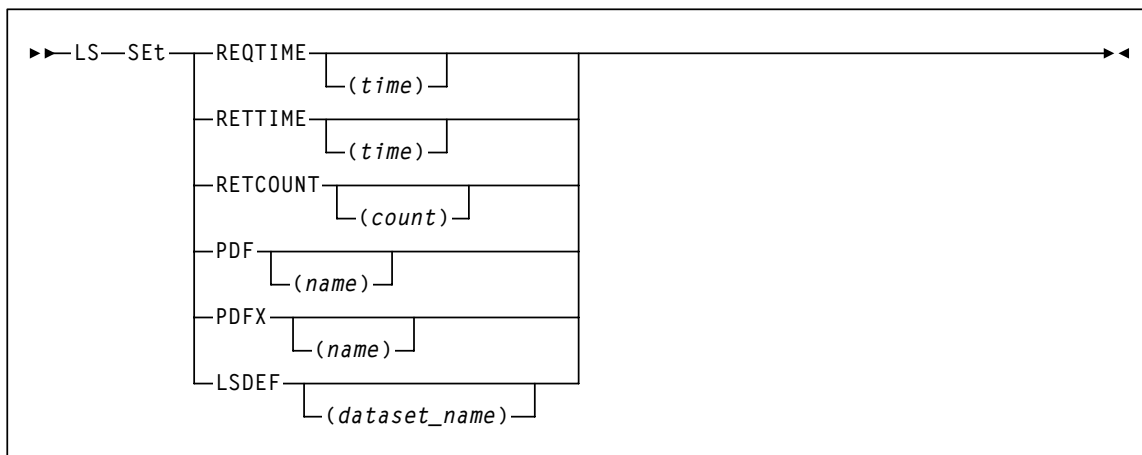

Note – PDF and PDFX are not applicable for MVS sysplex installations using XCF or LU6.2.

Parameters

See [“Optional Keyword Parameters of LSINIT” on page 50](#) for a complete description of the valid values for these keywords.

Example

```
.LS SET LSDEF  
.LS SET RETTIME(20)
```

The first example displays the current value set for LSDEF. The second example changes the minimum number of seconds that LibraryStation waits between attempts to establish a network connection.

Output

Messages are sent to the console that issued the Set command. In a sysplex environment, the response is issued to all consoles. For example:

```
SLS3463I Current LSDEF value is MY.LSDEF.FILE  
SLS3464I RETTIME set to 20
```

See [Chapter 6, “Messages and Codes”](#) for additional information about specific messages that are displayed.

Start Command

The Start command changes the state of LibraryStation from quiesced (IDLE or IDLE PENDING) to fully functional (RUN).

Restarting LibraryStation After Idle

A LibraryStation Start command must be issued to return LibraryStation to its normal processing state (RUN) after an Idle command has been issued.

Use the LibraryStation Display Status command to display the current operating state.

Syntax

```
▶▶—LS—Start—————▶▶
```

Parameters

Start

initiates the Start command.

Example

```
.LS S
```

This example starts LibraryStation after it has been quiesced.

Output

Messages are sent to the console where the Start command was issued. In a sysplex environment, the response is issued to all consoles. For example:

```
SLS3919I LS is now running  
SLS3404I START Command successfully executed
```


Examples

```
.LS STO  
.LS STO FORCE
```

These examples terminate LibraryStation. The second example terminates LibraryStation immediately.

Output

Messages are sent to the console where the Stop command was issued. In a sysplex environment, the response is issued to all consoles. For example:

```
SLS3919I LS is now IDLE  
SLS3361I LS termination started  
SLS3362I LS termination complete  
SLS3368I LS stopped
```

See [Chapter 6, "Messages and Codes"](#) for additional information about specific messages that are displayed.


Trace Command

The Trace command traces LibraryStation processes, including detailed startup and termination data, network client requests and responses, error conditions, state changes, and operator command requests.

Note – The LibraryStation Trace command is generally not used by customers except at the request of StorageTek Support personnel while diagnosing a problem. It is only included here with the standard operator commands so that you will have reference information available if you are instructed to run Trace.

The LibraryStation Trace command uses the MVS Generalized Trace Facility (GTF) through the HSC. Consequently, several MVS and HSC procedures must be performed before LibraryStation tracing can work properly. See [“Tracing” on page 105](#) for more information about tracing prerequisites.

Syntax

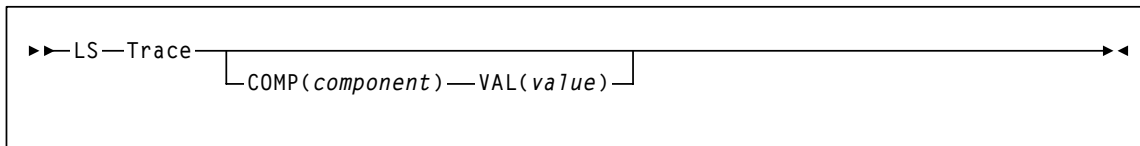

Parameters

Trace

initiates the Trace command. If no other parameters are specified, the current LibraryStation component trace settings are displayed.

COMP

indicates that a character component to trace will be identified next.

component

A single component identifier or a list of component identifiers to use for the trace command. The component identifiers are as follows:

CAP	CAP Request Processor
CL	Common Library
CSCI	Client Server Communication Interface
CSI	Client System Interface
DB	Persistent Data File Manager
HIF	HSC Interface
IF	Information Manager
IT	Initialization/Termination
LM	Library Manager

LO	Lock Manager
MT	Mount Request Processor
QU	Query Request Processor
SA	System Administrator
SCR	Scratch Request Processor
VA	Vary Request Processor

VAL

indicates that a trace map bit value will be identified next.

value

The following values are the same for each component:

00000000	Turns off tracing for the specified component
80000000	Module entry and exit. The GTF record identifier is D001 for module entry, D002 for module exit. Warning: This value can impact system performance.

Some components and processors also trace various stages or inputs/outputs during their processing, as described below.

The CAP processor also provides trace information that contains the CAP request packet.

40000000	CAP request packet. The GTF record identifier is D500.
20000000	CAP response packet. The GTF record identifier is D501.

The CL component provides trace information containing IPC information.

40000000	IPC information. The GTF record identifier for IPC open is D150; IPC transmit is D151; IPC read is D152.
20000000	XCF information. The GTF record identifier for XCF open is D153; XCF transmit is D154; XCF read is D155.

The CSCI component provides the following trace information:

40000000	Important variable values for all CSCI sub components.
08000000	Entry/Exit for the PER component.
04000000	Important variable values for the PER component.
00800000	Entry/Exit for the LU6 component.
00400000	Important variable values for the LU6 component.
00200000	All CPI/C calls issued by the LU6 component.
00080000	Entry/Exit for the XDR component.
00040000	Important variable values for the XDR component.
00008000	Entry/Exit for the CIF component.
00004000	Important variable values for the CIF component.
00000800	Entry/Exit for the IPC component.
00000400	Important variable values for the IPC component.

The CSI component traces various processing information described below.

20000000	Signal received. GTF record identifier is D752.
10000000	CSI initiation. GTF record identifier is D753.
08000000	CSI termination. GTF record identifier is D754.
04000000	Request packet arrival from the network interface. GTF record identifier is D755.
02000000	Response packet sent to the network interface. GTF record identifier is D756.
00400000	CSI state change. GTF record identifier is D759.
00200000	Miscellaneous communications data area information. GTF record identifier is D75A.

The LM component provides the following trace information:

40000000	Entry parameters. GTF record identifier is D351.
20000000	Signal received. GTF record identifier is D352.
10000000	LM initialization. GTF record identifier is D353.
08000000	LM termination. GTF record identifier is D354.
04000000	Request received from the CSI component. GTF record identifier is D355.
02000000	Request received from the SA component. GTF record identifier is D356.
01000000	Request received from LibraryStation. GTF record identifier is D357.
00800000	Request processor creation. GTF record identifier is D358.
00400000	LM state change. GTF record identifier is D359.
00200000	Request processor termination. GTF record identifier is D35A.

The MT processor provides tracing information for request and response packets.

00000001	Mount request packet. GTF record identifier is D600.
00000010	Mount response packet. GTF record identifier is D601.

The IF component provides the following trace information packets:

40000000	ACS record. GTF record identifier is D250.
20000010	LSM record. GTF record identifier is D251.
10000000	CAP record. GTF record identifier is D252.

The HIF component provides the following trace information packet.

40000000	Trace point record. GTF record identifier is D100 for BEFORE HSC call, D101 for AFTER HSC call. Module name and offset are needed from the trace record to determine HSC call.
----------	--

If any trace value is set for a specific component, GTF record type D000 will also be produced if the component has provided for its issuance. The D000 trace record consists of one word that indicates how many words of data follow.

Example

```
.LS T COMP(IT) VAL(80000000)
```

This example traces module entry and exit for the LibraryStation Initiation/Termination (IT) component.

Output

LibraryStation messages are sent to the console that issued the Trace command. In a sysplex environment, the response is issued to all consoles. For example:

```
SLS3470I Trace command status
LS trace mask 80000000 set for IT component
```

Trace output data is sent to the GTF Trace data set for use by StorageTek Support personnel.


See [Chapter 6, "Messages and Codes"](#) for additional information about specific messages that are displayed.

Vary DRIve Command

The Vary Drive command varies the state of a library drive as seen by the network.

Note – References to library drives in LibraryStation commands refer only to the drives as viewed from the network clients. LibraryStation does not affect MVS-attached drives. For example, the LibraryStation Vary Drive command does not perform an MVS Vary of the drive.

Syntax

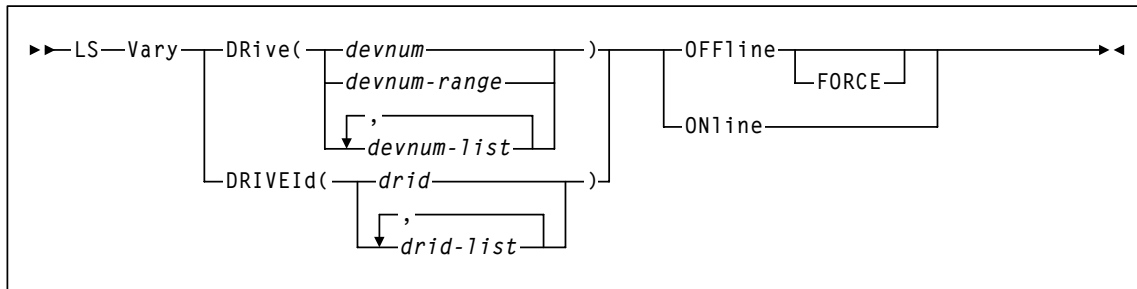

Parameters

Vary

initiates the Vary command.

DRIve

specifies that a drive state change is requested for specific device numbers.

devnum

specifies that drive status is requested for specific device numbers.

devnum or devnum-range or devnum-list

identifies one or more device numbers to display status for.

devnum-range is specified as two device numbers joined by a dash.

devnum-list elements may be either a single device number or a range of device numbers, with each list element separated by a comma or a blank.

Device numbers are defined in the HSC LIBGEN and are composed of three or four hexadecimal characters.

A range of numbers is valid for the *devnum* format only. The range may consist of 2 to 42 valid device numbers. If a range is specified, only existing LibraryStation-defined drives are reported. If no LibraryStation drives are defined in that range, an appropriate message is issued.

DRIVEId

specifies that a drive state change is requested for specific driveids.

drid or drid-list

identifies a single driveid or a list of driveids. Driveids can be specified using the following format:

AA:LL:PP:NN

where:

- *AA* is the ACS number (00-7E hexadecimal)
- *LL* is the LSM number (00-23 hexadecimal)
- *PP* is the drive panel number within the LSM (1-10 decimal)
- *NN* is the relative drive number within the panel (0-19 decimal)

Note – Site-specific information required for this command was recorded on the “Drive Worksheet” on page 78.

OFFline

makes the drive unavailable for requests from LibraryStation network clients.

FORCE

forces the drive offline immediately, even if the drive is in use (as shown by the Display Drive command). This parameter is only valid for OFFLINE requests and should only be used after determining that the device is not in use.

ONline

makes the drive available for requests from LibraryStation network clients.

Examples

```
.LS V DR(51F) ON
.LS V DR(51C-51F) OFF
.LS V DR(51C,51D) ON
.LS V DRIVEI(01:0F:10:2) OFF FORCE
```

In these examples, the following devices are varied:

- Device number 51F is varied online
- A range of device numbers from 51C through 51F is varied offline
- A list of device numbers 51C and 51D are varied online
- Drive number-3 on panel-10, in LSM-0F, of ACS-01 is forced offline immediately

Output

Messages are sent to the console where the Vary Drive command was issued. In a sysplex environment, the response is issued to all consoles. For example:

```
SLS3471I Vary command status  
Drive (051F) (00:00:09:00) varied ONLINE
```

See [Chapter 6, “Messages and Codes”](#) for additional information about specific messages that are displayed.

Administration and Maintenance

This chapter describes ongoing system administration and maintenance procedures, including:

- Administration procedures to change the number of tape cartridge drives available to LibraryStation or add LibraryStation to additional MVS hosts.
- Administration procedures to modifying LibraryStation operating characteristics in the LSINIT control statement.
- Maintenance procedures that may be required to recover from a hardware or software failure during LibraryStation operation.
- Diagnostic tools you may use or that StorageTek Support personnel may ask you to use in the event of system failures or performance problems.

Note – Virtual Storage Manager (VSM) support has been added for certain LibraryStation diagnostic tools. Refer to your VTCS publications for more information.

System Administration

This section describes administrative procedures you may perform as your LibraryStation system hardware and software configurations change. The following administrative scenarios are discussed:

- Making additional tape cartridge drives available to LibraryStation
- Making existing tape cartridge drives unavailable to LibraryStation
- Modifying LSINIT Operating Characteristics

Making Additional Tape Cartridge Drives Available to LibraryStation

The number of tape cartridge drives that can be accessed by LibraryStation was initially established during LibraryStation configuration. However, As your system requirements change, you may need to make additional drives available for network mounts and dismounts.

Note – See “Configuring Security Measures” on page 21 before making additional tape cartridge drives available to LibraryStation.

Tape cartridge drives are made available to LibraryStation through the HSC LIBGEN. You must modify one or more macros in the LIBGEN to make additional tape cartridge drives available to LibraryStation.

Specifically, you need to modify the SLIDLIST macro for the drive panel containing the tape cartridge drives you wish to make available to LibraryStation. If new device numbers are being created, you must also create new SLIDRIVS macros containing those device numbers.

For example, suppose the HSC LIBGEN contains the following macros:

```

SLILIBRY HOSTID=(HSC1,LSID)
PANEL2  SLIDLIST HOSTDRV=(DRV1,DUMMY1)
DRV1    SLIDRIVS ADDRESS=(410,411,412,413)
DUMMY1  SLIDRIVS ADDRESS=(,,,)

```

In this example, drives in PANEL2 are available to hostid HSC1 but not to LibraryStation (hostid LSID). If you wish to make the drives in PANEL2 available to LibraryStation but unavailable to HSC1, modify the SLIDLIST macro as follows:

```

PANEL2  SLIDLIST HOSTDRV=(DUMMY1,DRV1)

```

The drive panel is now available only to LibraryStation.

When you have finished modifying HSC LIBGEN macros, you may need to reconfigure the LIBGEN:

- If the changes only involved changing device numbers in SLIDRIVS macros, you can use the Set utility (SLIDRIVS option) to implement the changes.
- If the changes involved more than simply changing device numbers, you must reconfigure the LIBGEN using the MVS Start command with the Reconfig parameter in the PROC.

Refer to the *HSC System Programmer's Guide* for detailed information about individual HSC macros, the Set utility, and the reconfiguration process.

Note – Some versions of the *HSC System Programmer's Guide* state that library station device numbers can be set using the HSC Set Utility with the SLISTATN option. This is a generic reference to LMU station device numbers and is **not** a reference to the LibraryStation product described here. LibraryStation device numbers **cannot** be set using the SLISTATN option of the HSC Set utility.

Making Existing Tape Cartridge Drives Unavailable to LibraryStation

The number of tape cartridge drives that can be accessed by LibraryStation was initially established during LibraryStation configuration. As your system requirements change, you may need to make existing drives unavailable for network mounts and dismounts.

Tape cartridge drives are made available to LibraryStation through the HSC LIBGEN. You must modify one or more macros in the LIBGEN to make existing tape cartridge drives unavailable to LibraryStation.

Specifically, you need to modify the SLIDLIST macro for the drive panel containing the tape cartridge drives you want to make unavailable to LibraryStation.

For example, suppose the HSC LIBGEN contains the following macros:

```
SLILIBRY HOSTID=(HSC1,LSID)
PANEL2 SLIDLIST HOSTDRV=(DRV1,DRV1)
```

This macro indicates that the drive panel is available to both hostids in the SLILIBRY macro. To make the drive panel represented as PANEL2 unavailable to LibraryStation, replace the operand in the same position as the hostid LSID in the SLILIBRY macro with a dummy operand, such as DUMMY1. For example:

```
PANEL2 SLIDLIST HOSTDRV=(DRV1,DUMMY1)
```

Then add a new SLIDRIVS macro for the dummy operand, with no device numbers assigned. For example:

```
DUMMY1 SLIDRIVS ADDRESS=(,,)
```

The drive panel is now available only to the hostid that occupies the first position in the SLILIBRY HOSTDRV parameter.

When you have finished modifying HSC LIBGEN macros, you may need to reconfigure the LIBGEN:

- If your changes only involved changing device numbers in SLIDRIVS macros, you can use the Set utility (SLIDRIVS option) to implement the changes.
- If the changes involved more than simply changing device numbers, you must reconfigure the LIBGEN using the MVS Start command with the Reconfig parameter in the PROC.

Refer to the *HSC System Programmer's Guide* for detailed information about individual HSC macros, the Set utility, and the reconfiguration process.

Note – Some versions of the *HSC System Programmer's Guide* state that library station device numbers can be set using the HSC Set Utility with the SLISTATN option. This is a generic reference to LMU station device numbers and is **not** a reference to the LibraryStation product described here. LibraryStation device numbers **cannot** be set using the SLISTATN option of the HSC Set utility.

Modifying LibraryStation Operating Characteristics

LibraryStation operating characteristics can be modified in several ways:

- Any LSINIT parameter can be changed by updating the LSINIT statements and then restarting the HSC.

See [“Configuring the LSINIT Control Statement” on page 44](#) for information about changing LSINIT parameters.

- Several LSINIT parameters (such as LSDEF) can be temporarily changed with the Set command but the changes are not effective until LibraryStation is stopped and re-initialized. These changes remain in effect until the HSC is restarted.
- Other LSINIT parameters (REQTIME, RETTIME, RETCOUNT) can be temporarily changed with the Set command and the changes are effective immediately. These changes remain in effect until the HSC is restarted.
- The Persistent Data File (PDF) can be modified at any time, but these changes are not effective until LibraryStation is stopped and re-initialized.
- See [“Allocating the Persistent Data File” on page 35](#) for information about changing the PDF file.
- The LSDEF parameter file can be modified at any time, but these changes are not effective until LibraryStation is stopped and re-initialized.

See [“Configuring the LSDEF Data Set” on page 58](#) for information about changing the LSDEF files.

LibraryStation Diagnostic Tools

Several diagnostic tools are included with or are available to LibraryStation, including the following:

- Logging of high-level events to the MVS SYSLOG file
- Tracing of detailed system-level information through the MVS Generalized Trace Facility (GTF)
- LibraryStation system analysis independent of network or client activity through the SLGDIAG installation verification program
- Network and client system analysis through diagnostic tools supplied by the TCP/IP communications product and network client systems

Each tool is described in this section.

Note – Virtual Storage Manager (VSM) support has been added for certain LibraryStation diagnostic tools. Refer to your VTCS publications for more information.

Logging

Logging is the recording of high-level information and is meant for customer information and initial debugging. Activities that are logged during LibraryStation operation provide an audit trail of information that is useful in determining the state of LibraryStation during problem occurrences.

Information about LibraryStation initialization, termination, error conditions, and state changes is logged continuously in the MVS SYSLOG file. The message prefix SLS3 identifies LibraryStation events in the file, as shown in the figure below.

Note – The HSC also outputs messages for LibraryStation events. These messages appear with LibraryStation messages in the SYSLOG file.

```

08.14.55 STC 2998 >SLS0000I LS D S
08.14.57 STC 2998 >SLS3416I Server is RUN
08.14.57 STC 2998 >SLS3417I Mount(00/00) Dismount(00/00) Enter(00/00) Eject(00/00)
08.15.02 STC 2998 >SLS0000I LS D DR(A30)
08.15.03 STC 2998 >SLS3467I Drive(A30)(00:00:00)(00:00:09:00) Type 4480 ONLINE, avail
08.15.33 STC 2998 >SLS0000I LS D R
08.15.34 STC 2998 >SLS3418I Request 00003: command QUERY status PENDING
08.15.44 STC 2998 >SLS0000I LS I
08.15.44 STC 2998 >SLS3919I LS is now IDLE
08.15.44 STC 2998 >SLS3404I IDLE command successfully executed
08.15.54 STC 2998 >SLS0000I LS S
08.15.54 STC 2998 >SLS3919I LS is now running
08.15.54 STC 2998 >SLS3404I START command successfully executed

```

FIGURE 4-1 Sample SYSLOG Output

Tracing

LibraryStation generates trace information that can be recorded in the MVS Generalized Trace Facility (GTF) along with HSC trace information.

Detailed system-level information is traced, including startup and termination data, network client requests and responses, error conditions, state changes, and operator command requests.

Note – Normally, you will only activate tracing when requested to do so by StorageTek Support personnel. Current HSC procedures for collecting GTF trace information and forwarding it to StorageTek Support are also applicable for LibraryStation.

LibraryStation tracing is dynamically invoked with the LS Trace command. However, since tracing requires the GTF software and also relies on HSC tracing facilities, the following procedures must be performed before LibraryStation tracing can work properly:

1. GTF must be started to create GTF output for events.
Refer to the *HSC System Programmer's Guide* for more information about using GTF.
2. The HSC Trace command must be run with the component name LS (such as TRACE LS) to make tracing available to LibraryStation.
Refer to the *HSC System Programmer's Guide* for more information about the HSC Trace command.

When GTF is started and the TRACE LS command has been issued, the LibraryStation Trace command can be run. The trace records for LibraryStation are user GTF records. An eventid is assigned to the HSC, and the HSC assigns an internal subtype designation. Specific subtypes are assigned for use by LibraryStation.

For MVS/ESA, trace information collected with GTF is extracted and printed using the IBM IPCS utility with the GTFTRACE subcommand. For MVS/XA, the AMDPRDMP utility serves this purpose.

See [“Trace Command” on page 91](#) for information about the specifics of running the LibraryStation Trace command.

SLGDIAG Installation Verification Program

Note – Virtual Storage Manager (VSM) support has been added for the SLGDIAG installation verification program. Refer to your VTCS publications for more information.

The SLGDIAG installation verification program verifies basic LibraryStation operation independent of network or client activity. SLGDIAG generates basic query, mount, and dismount requests to LibraryStation.

The LibraryStation requests are generated by a program executable as a batch job on the MVS server processor and passed to LibraryStation.

Note – Though SLGDIAG is specified for use as a batch program invoked through JCL, you could choose to make SLGDIAG available as a started task or as a TSO-startable program.

SLGDIAG requires the use of an available tape drive and tape cartridge and must be executed on the same MVS host system where LibraryStation is initialized. You may choose to dedicate a tape cartridge to this purpose to make SLGDIAG a readily-available operator tool.

SLGDIAG exercises LibraryStation using the following interfaces

- ONC/RPC interface through TCP/IP
- SNA LU6.2 interface using APPC/MVS
- TCP/IP (CSCI)
- XCF

For this reason, TCP/IP, APPC/MVS, or XCF (depending on which interface is used) must be operational, though it need not be in actual contact with an external network.

Note – The following example displays the basic format of the code needed to perform this procedure. For best results, use the sample JCL contained in the data set defined by the SLCSAMP SMP/E DDDEF, member name SLGDJCL

```
//SLGDIAG JOB ( installation options )
/*
/** THIS JOB RUNS LIBRARYSTATION DIAGNOSTICS PGM
/** ----- SLGDIAG -----
//RUNDIAG EXEC PGM=SLGDIAG ,
//  PARM='diag_keywords'
//STEPLIB DD DISP=SHR,DSN=high_level_index.SLCLINK
//          DD DISP=SHR,DSN=high_level_index.SACLINK
//          DD DISP=SHR,DSN=high_level_index.CSSLINK
//SYSPRINT DD SYSOUT=A
//SYSIN DD diag_keywords_file
=COMMTYPE=RPC|LU6|XCF|TCPIP
=DRIVE=drv
=VOLUME=vol
/*
```

FIGURE 4-2 JCL for SLGDIAG Installation Verification Program

Note –

- Add the following DD statement if SNA LU6.2 is a supported client through APPC/MVS:
DD DSN=SYS1.CSSLIB,DISP=SHR
SYS1.CSSLIB must be an authorized data file.
 - Add the following DD statement if CA Unicenter TCPaccess TCP/IP products are used:
DD DSN=IOS.TCPLINK,DISP=SHR
The TCPLINK data set must precede the SACLINK data set.
 - Add the following DD statement if IBM TCP/IP is used to support ONC/RPC clients:
//SYSTCPD DD DSN=ddd.eee.fff(anyname)
-

The SLGDIAG *diag_keywords* may be specified in either the EXEC PARM statement or they may be provided in a file.

- If *diag_keywords* are specified in the EXEC PARM statement, the SYSIN DD statement in the JCL example is not required.
- If the *diag_keywords* are specified in the EXEC PARM statement, the keywords are separated by blanks.
- If the *diag_keywords* are provided in a file (or in the JCL input stream), each keyword must be specified on a separate line, beginning in column-1.
- All *diag_keywords* must be immediately preceded and followed by an equal sign (=). Lines that do not begin with equal will be ignored.
- The value to be assigned to the keyword is provided immediately to the right of the keyword's trailing equal sign.

- The SLGDIAG keyword parameters can be specified in any order.
- Keywords may not contain imbedded blanks.
- If any of the keywords are specified more than once, the last specification is the one that is used.
- Sequence numbers in a keyword file are not allowed. SLGDIAG will not accept these lines.
- If you misspell a keyword, the keyword's default is assumed.

SLGDIAG Supported Keywords

The following keywords are supported by SLGDIAG:

=VOLUME=*vol*

Specifies the volume to be mounted and dismounted. This keyword is required (except with VSM). There is no default.

=DRIVE=*drv*

Specifies the drive on which the volume is mounted. The drive is specified in the format *aa,ll,pp,d*, where *aa* is the ACS number, *ll* is the LSM number, *pp* is the panel number, and *d* is the relative drive number on the panel. This keyword is required. There is no default.

=COMMTYPE=*RPC | LU6 | XCF | TCPIP*

Specifies which communication method(s) to use to communicate with LibraryStation. This keyword is optional. The default is *RPC*.

- If *RPC* is specified, SLGDIAG uses TCP/IP communications to send messages to LibraryStation.
- If *LU6* is specified, SLGDIAG uses APPC/MVS to send messages to LibraryStation.
- If *XCF* is specified, SLGDIAG uses XCF to send messages to LibraryStation. With XCF, SLGDIAG must be run out of an APF-authorized library.
- If *TCPIP* is specified, SLGDIAG uses TCP/IP (CSCI) communications to send messages to LibraryStation.

=TCPIPTEST=*YES | NO*

This keyword enables you to test your LibraryStation TCP/IP configuration. Unlike other SLGDIAG keywords, this keyword can be included in an SLGDIAG job submitted prior to starting LibraryStation. This keyword is optional. The default is *NO*.

- If *YES* is specified, SLGDIAG tests your LibraryStation TCP/IP configuration.
- If *NO* is specified, this test is disabled.

=TCPNAME=*comm_service_name*

Specifies the TCP/IP communications service. The keyword specified must match the TCPNAME parameter specification on the LSINIT statement. This keyword is optional and is used only when =COMMTYPE=*RPC* or *TCPIP*.

=TCPPOINT=*TCP_port*

Specifies a TCP port used for TCP/IP communications. This keyword is optional and is used only when =COMMTYPE=*RPC* or *TCPIP*.

The value for TCPPOINT must be between 1 and 65535. If the value specified is outside this range, TCPPOINT takes the default value of 60001.

=SYMDESTN=*sym_dest_name*

Specifies the symbolic destination name that represents the transaction program and local logical unit that LibraryStation uses to register with APPC/MVS. The symbolic designation name must be the name of an entry in the active APPC/MVS side information file that represents LibraryStation. See [“APPC/MVS Configuration” on page 19](#) for information about how the side information entry is built. This keyword is optional and is used only if =COMMTYPE=*LU6*. The default is LIBSTAT.

=XCFGROUP=*xcf_group_name*

Specifies the name of the LibraryStation XCF group that is used by LibraryStation to register with XCF. This parameter is used only if =COMMTYPE=XCF. The default is SLGSTATN.

=XCFMEMBER=*xcf_member_name*

Specifies the name of the LibraryStation XCF member that SLGDIAG is to communicate with. This parameter is only used if =COMMTYPE=XCF.

The volume and transport information supplied to SLGDIAG are turned into valid LibraryStation ONC/RPC, SNA LU6.2, or XCF requests. These requests are forwarded to LibraryStation and the responses from LibraryStation to these requests are recorded.

A return code of 00, 04, 08, or 12 is returned by the SLGDIAG job step, indicating:

- (RC=00) The test completed successfully.
- (RC=04) The test failed because of a parameter error or request failure.
- (RC=08) The test failed because of a LibraryStation or HSC software error, an abend, or process failure.
- (RC=12) The test failed because of a network communication error.

Additional information about test failure is logged on the SYSPRINT data set. If SLGDIAG fails, refer to the SYSPRINT data set for messages that will help you determine the reason for the failure. Then correct the problem and run SLGDIAG again.

Network Diagnostic Tools

The TCP/IP communication product and the client processor(s) together contain tools to validate access to LibraryStation. While not strictly part of the LibraryStation product, these tools are necessary to diagnose the total library environment.

For example, network-attached clients should be able to use PING and RPCINFO to verify communications over the LAN through the CPA to the TCP/IP communication product.

- A PING command executed as

```
PING host
```

(where host is the name or Internet address of the MVS processor where LibraryStation will execute) should receive a response such as "host is active."

- An RPCINFO command executed as

```
RPCINFO -P host
```

(where host is the name or Internet address of the MVS processor where LibraryStation will execute) should receive two or more responses indicating RPC program numbers, versions, protocols, and port numbers for registered RPC programs. When LibraryStation is active, its program number (300031) will be displayed.

If APPC/MVS is used, the MVS DISPLAY APPC and DISPLAY NET commands can be used as an aid in problem determination. APPC/MVS and VTAM console messages can contain vital information necessary to identify and correct problems. It is also possible to run VTAM traces and format them using IPCS. If XCF is used, the MVS Display XCF command can be used as an aid in problem determination.

LibraryStation Failure Recovery

In a failure situation, The primary responsibility of LibraryStation is to maintain the consistency of internal data so that it can be retrieved during failure recovery.

After a system failure, LibraryStation software is automatically reinstated after HSC recovery has completed. The LibraryStation software performs self-recovery procedures to return LibraryStation to an operable state.

Operator intervention is required in a failure situation only if LibraryStation or component software fails during recovery processing, or if an ACS library component must be placed offline due to a hardware failure.

If an unrecoverable failure of the LibraryStation software occurs, issue the LS STOP operator command, followed by the LS INIT operator command. If this does not correct the problem, the HSC can be terminated to Base Service Level and then brought up to Full Service Level.

Note – In a parallel sysplex environment, STOP FORCE must be used instead of STOP if you wish to stop a server and redirect its work to a standby server.

Persistent Data File (PDF) Failure Recovery

The following does not apply to sysplex installations servicing only MVS/CSC clients using XCF or LU6.2. The PDF is disabled for these installations.

After an HSC failure, the PDF alternate index may lose synchronization with its base cluster if an I/O between the two was in progress when the abend occurred.

LibraryStation notifies you of this condition by generating error message SLS3300I during initialization. This message indicates that PDF indexes cannot be accessed or have become unsynchronized. See [Chapter 6, "Messages and Codes"](#) for detailed information regarding this message. LibraryStation cannot be successfully initialized until the condition is corrected.

Perform the following steps to recover from a PDF software error:

Note – The PDF must not be currently allocated to the HSC address space. Consequently, you must terminate the HSC to Base Service Level before performing this procedure.

1. Rebuild the PDF indexes.

The JCL in [FIGURE 4-3 on page 113](#) can be used to rebuild PDF indexes. This JCL is a **representation** of the code you will need to perform this procedure. It may not be the most accurate or most recent representation available. For best results, refer to the sample JCL contained in the data set defined by the SLCSAMP SMP/E DDDEF. The member name is SLGDBNX.

2. Initialize the HSC and LibraryStation.

- If initialization is successful, continue with your normal operation.
- If LibraryStation cannot be initialized because the PDF problem has not been corrected, continue with the next step.

3. If rebuilding the PDF indexes did not correct the problem, you will need to redefine the PDF as you did during LibraryStation installation. Refer to the *NCS Installation Guide* for information on defining the PDF data sets. Note that the server's lock information is lost when you rebuild the PDF.

The JCL in [FIGURE 4-4 on page 114](#) can be used to redefine the PDF. This JCL is a **representation** of the code needed to perform this procedure. It may not be the most accurate or most recent representation available.

If you must redefine the PDF, be sure to set site-specific variables (such as NAME, VOLUMES, and RECORDS variables) to their previous values. Refer to the *NCS Installation Guide* for site-specific information you may need for this step.

4. After you have redefined the PDF, initialize the HSC and LibraryStation.

- If initialization is successful, continue with your normal operation
- If LibraryStation cannot be initialized because the PDF problem has not been corrected, continue with the next step

5. If reallocating the PDF does not correct the problem, you likely have a hardware problem in the device where the PDF is physically located. In this case, you must reallocate the PDF on a different volume. Be sure to set site-specific variables the same as they were previously, except for the VOLUME field. Enter the volser for the new DASD volume where the PDF is to be allocated in the VOLUME field.

```

//SLGDBNX JOB job card info
//*
/* NOTE: IDCAMS BLDINDEX will attempt to do an internal sort.
/*      If there is insufficient virtual storage it may be
/*      necessary to add IDCUTx DD statements.  See IBM
/*      Access Method Services manual for more details.
/*
//BLDNDX   EXEC PGM=IDCAMS
//SYSPRINT DD SYSOUT= *
//SYSIN   DD *
    DELETE (alternate_index_name) AIX
    DEFINE ALTERNATEINDEX (
        NAME(alternate_index_name)
        RELATE(cluster_name)
        KEYS(10 2)
        RECORDS(2000,4000)
        RECORDSIZE(27 27)
        VOLUMES(volser)
        UNIQUEKEY
        UNIQUE
        UPGRADE )
    DEFINE PATH (
        NAME(path_name)
        PATHENTRY(alternate_index_name))
    BLDINDEX
        INDATASET(cluster_name)
        OUTDATASET(alternate_index_name)
    LISTCAT ENTRIES(
        cluster_name
        alternate_index_name
        path_name) ALL
/*

```

FIGURE 4-3 JCL for Rebuilding PDF Indexes

```

//SLGDBCR JOB job card info
//*
/* NOTE: A minimum of 1 Meg of virtual storage is needed
/* for this job, i.e., use REGION=1M on the job card
/*
//CREATEDB EXEC PGM=IDCAMS
//SYSPRINT DD SYSOUT=*
//INPUT DD *
000000000000 DB INITIALIZATION RECORD
//SYSIN DD *
DELETE (cluster_name) CLUSTER
DEFINE CLUSTER (
  NAME(cluster_name)
  VOLUMES(volser)
  RECORDS(2000,4000)
  RECORDSIZE(30 100)
  KEYS(12 0)
  UNIQUE )
REPRD INFILE(INPUT)
      OUTDATASET(cluster_name)
DEFINE ALTERNATEINDEX (
  NAME(alternate_index_name)
  RELATE(cluster_name)
  KEYS(10 2)
  RECORDS(2000,4000)
  RECORDSIZE(27 27)
  VOLUMES(volser)
  UNIQUEKEY
  UNIQUE
  UPGRADE )
DEFINE PATH (
  NAME(path_name)
  PATHENTRY(alternate_index_name)
BLDINDEX
  INDATASET(cluster_name)
  OUTDATASET(alternate_index_name)
LISTCAT ENTRIES (
  cluster_name
  alternate_index_name
  path_name) ALL

```

FIGURE 4-4 JCL for Redefining the PDF

Dynamic Server Switching

LibraryStation supports dynamic server switching for environments containing multiple LibraryStation servers, using a COMMTYPE of XCF or LU6.2.

Dynamic server switching allows an MVS/CSC client to dynamically switch connection to an alternate LCS (Library Control System) when it detects that the current LCS is unavailable.

Dynamic server switching is initiated and controlled by the client system. Dynamic server switching is configured for each MVS/CSC client using the MVS/CSC SRVRLIST startup parameter. Refer to the *MVS/CSC Configuration Guide* for more information on dynamic server switching and the SRVRLIST startup parameter.

Cross Host Recovery

Cross host recovery provides a standby server for open system clients, eliminating the need to manually start another LibraryStation when the active LibraryStation is terminated.

With cross host recovery enabled, at termination, the active LibraryStation notifies the standby LibraryStation(s). The first standby LibraryStation to receive the request becomes the active LibraryStation for open system clients. See [“Configuring the LSINIT Control Statement” on page 44](#) for more information about cross host recovery and the XHREC LSINIT parameter.

Starting and Stopping LibraryStation

This chapter includes information for stopping and Starting LibraryStation.

Starting LibraryStation

LibraryStation requires an LSINIT control statement in order to initialize. This control statement is established in the HSC SLSSYSxx parameter data set during LibraryStation installation and configuration.

Depending on site-specific LSINIT control statement parameters, LibraryStation can be initialized in any of the following ways:

- Automatically, during the HSC initialization process
- Manually, when the LibraryStation LS Init operator command is issued after HSC initialization
- Via cross host request, when the LibraryStation is in standby status and the active LibraryStation supporting cross host recovery terminates

Note – If LibraryStation is installed on or made available to more than one host system through shared DASD, initialization can occur from any host system authorized by the LSINIT control statement parameters to start LibraryStation.

If syntax errors occur on the LSINIT statement or in processing the options data sets indicated by parameters on the LSINIT statement, error messages will be generated. When an error message is encountered, see [Chapter 6, “Messages and Codes”](#) for specific message information.

LibraryStation initialization proceeds to a state in which network and/or operator requests for LibraryStation services can be processed. Any resources required by LibraryStation are allocated, checks are made to insure that Communication Interface is available, and interfaces to the MVS/HSC are checked for operability.

The following conditions cause LibraryStation to be aborted:

- Resources Unavailable
LibraryStation could not acquire the necessary resources for successful initialization. The SYSLOG is updated with the error condition and LibraryStation terminates.
- Startup Parameter Errors
Errors in the startup LSINIT statement cause LibraryStation to terminate. The SYSLOG is updated with the error condition and LibraryStation terminates.

The following conditions cause LibraryStation to be functionally degraded when initialized:

- ONC/RPC Unavailable
Network communications are unavailable due to an inability to register ONC/RPC services. LibraryStation periodically attempts to register ONC/RPC services.
- MVS/APPC Unavailable
Network communications are unavailable due to an inability for LibraryStation to register with MVS/APPC. This would normally indicate that the MVS/APPC address space is not active. LibraryStation periodically attempts to register with MVS/APPC.

Stopping LibraryStation

LibraryStation can be terminated in either of the following ways:

- Automatically, when HSC is terminated or changed to base level
- Manually, by the MVS operator using the LibraryStation LS Stop command

At termination, communication with network clients is discontinued and resources acquired by LibraryStation are returned to the operating system. All outstanding requests and replies are allowed to complete, except when the LS Stop command includes a Force parameter.

Significant events that occur during termination are recorded in the SYSLOG. The log records the start of termination as well as subsequent events.

LibraryStation processing of operator commands is stopped. The SYSLOG records the start of termination. If an error should occur during termination, the error is recorded in the SYSLOG and termination continues. When termination completes, LibraryStation resources are returned to the operating system, and a termination complete message is recorded in the SYSLOG.

If cross host recovery support is specified, the active LibraryStation issues an LS initialization request to all other active HSC subsystems during termination. The first standby LibraryStation to begin initialization becomes the active LibraryStation.

Messages and Codes

Overview

This chapter describes provides information about LibraryStation messages. This information is provided to help system programmers and operators:

- initialize Librarystation
- monitor LibraryStation activity
- diagnose and correct LibraryStation problems
- keep LibraryStation running correctly

Note – See [Appendix B, “Message Change Summary”](#) for a summary of new, changed, and deleted messages for this release.

Message Format

LibraryStation system messages help you interpret and respond to the informational, diagnostic, and error messages issued by LibraryStation during operation.

Messages are displayed on the console in the following format:

```
SLS nnnn message-text
```

where:

- SLS identifies LibraryStation
- *nnnn* is a four-digit message identifier
- *x* is a message type identifier, as follows:
 - D = decision
 - E = error
 - I = information

- *message-text* is the actual text displayed on the job log or system log.

Note – The HSC Display Message facility can also be used to display information about LibraryStation messages. For example, the command D MSG (3999) displays information about message SLS3999I.

Message Descriptions

This chapter provides a description for each SMC message. In addition to the message number and message text, this description includes the following:

Explanation

The explanation describes the message.

System Action

The system action describes how LibraryStation reacts when a message-triggering event occurs.

User Response

The user response describes how the user should respond to the message. In many cases, no response is required.

Variable Definitions

Italicized text indicates variable data that is replaced by actual values when messages are issued. Message-specific information is symbolized as follows:

TABLE 6-1 Variable Data Definitions

Variable Data	Definition
<i>AA</i>	ACSid
<i>AA:LL</i>	CAPid or LSMid location (ACSid and LSMid or CAPid)
<i>AA:LL:PP:DD</i>	Drive location (ACSid, LSMid, panel, device number)
<i>AA:LL:PP:RR:CC</i>	Cartridge location (LSMid, panel, row and column)
<i>C</i>	Variable information (character data)
<i>ddd.ddd.ddd.ddd</i>	Indicates dotted-decimal form used for Internet addresses
<i>D</i>	Indicates a decimal value
<i>volser</i>	Volume serial number
various letters (i.e., C, E, F, etc.)	Variable information (character data)
<i>X</i>	Indicates a hexadecimal value
{ }	Indicates available choices
[]	Indicates an optional field (may not appear in message)

Message Listing

The following messages are listed numerically.

SLS3000I

variable message text

Explanation: Contains variable message text that can be used as a diagnostic aid.

System Action: None.

User Response: None.

SLS3101I

Unexpected status *SSSSSSSS* for command *CCCCCCCC*

Explanation: An unexpected status *SSSSSSSS* during acknowledgment or response processing was detected for command *CCCCCCCC*.

System Action: Acknowledgment or response is NOT sent to the client issuing the command. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3102I

Unexpected task creation failure on request *RRRRRRRR*, RC = *EEEEEEEE*

Explanation: .LibraryStation was unable to create a task to process request *RRRRRRRR*. System return code (errno) was *EEEEEEEE*.

System Action: The task is not created for request *RRRRRRRR*, and the request is rejected. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3103I

Unexpected index *IIIIIIII* for command *CCCCCCCC*

Explanation: During LibraryStation termination, an outstanding request *CCCCCCCC* caused an invalid table index *IIIIIIII* to be found.

System Action: LibraryStation termination continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3104I

Failed to allocate IPC mechanism, RC = *EEEEEEEE*

Explanation: LibraryStation was unable to create an IPC mechanism for processing a request. The IPC creation return code was *EEEEEEEE*.

System Action: The request is rejected. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3105I

Invalid address AAAAAAAAAA for message

Explanation: LibraryStation cannot send a response back to IPC socket address AAAAAAAAAA.

System Action: The response is not sent. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3106I

Invalid search direction DDDDDDDD

Explanation: LibraryStation request table search received an invalid search direction DDDDDDDD.

System Action: The request currently being processed is rejected. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3107I

Invalid exit status SSSSSSSS returned from process id PPPPPPPP

Explanation: LibraryStation detected an exiting request process PPPPPPPP with an invalid exit status SSSSSSSS.

System Action: LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3108I

Invalid message identifier IIIIIIII

Explanation: LibraryStation detected an invalid message identifier IIIIIIII while processing the final or intermediate response for the request.

System Action: The response message is not sent. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3109I

Invalid terminate flag FFFFFFFF

Explanation: LibraryStation received an invalid terminate flag FFFFFFFF during termination.

System Action: LibraryStation termination continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3110I

Unable to access queue member MMMMMMMM

Explanation: LibraryStation detected an inaccessible queue member MMMMMMMM during request processing.

System Action: The current request is rejected. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3111I

Unable to delete queue member *MMMMMMMM*

Explanation: LibraryStation detected a queue member *MMMMMMMM* during request processing that could not be deleted.

System Action: LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3112I

Unable to find matching queue member to process id *PPPPPPPP*

Explanation: LibraryStation was unable to find the matching queue member after process id *PPPPPPPP* terminated.

System Action: LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3113I

Unable to create request queue *QQQQQQQQ*

Explanation: LibraryStation was unable to create queue *QQQQQQQQ*.

System Action: Processing for the current request is terminated. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3114I

Received null pointer to request packet

Explanation: LibraryStation detected a bad request pointer during request processing.

System Action: Processing for the current request is terminated. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3115I

Blank socket name for message destination

Explanation: LibraryStation cannot send a response back to a blank IPC socket.

System Action: The response message is not sent. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3116I

Message sequence out of order; final already received

Explanation: LibraryStation detected a message sequence out of order during request response processing.

System Action: The additional response is not sent to the request submitter. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3117I

Unexpected error *EEEEEEEE*; LM terminating

Explanation: The LibraryStation Library Manager (LM) detected an unrecoverable error during request processing.

System Action: The Library Manager terminates. LibraryStation will attempt to recover.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3118I

Unexpected LM state *SSSSSSSS*; LM terminating

Explanation: The LibraryStation Library Manager (LM) detected an invalid system state.

System Action: The Library Manager terminates. LibraryStation will attempt to recover.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3119I

Final response generated for *CCCCCCCC*; status *SSSSSSSS* sent to *RRRRRRRR*

Explanation: LibraryStation sent status *SSSSSSSS* for command *CCCCCCCC* to socket *RRRRRRRR* during completion processing.

System Action: LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3120I

Unexpected exit status *SSSSSSSS* from command *CCCCCCCC*

Explanation: LibraryStation detected an invalid status *SSSSSSSS* from a request process for command *CCCCCCCC*.

System Action: LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3121I

Transmission of message to itself on socket *SSSSSSSS*

Explanation: LibraryStation detected an attempt to send a request packet to itself on socket *SSSSSSSS*.

System Action: The request packet is not sent. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3122I

Residual request RRRRRRRR detected: queue QQQQQQQQ, process id PPPPPPPP

Explanation: LibraryStation detected a nonreturning process for request RRRRRRRR in queue QQQQQQQQ. The nonreturning process had process id PPPPPPPP.

System Action: A final response is sent to the request originator. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3123I

Error in request queue QQQQQQQQ; queue recreated

Explanation: LibraryStation detected an abnormal queue condition in queue QQQQQQQQ.

System Action: The request queue is recreated. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3124I

Inconsistencies found in request queue QQQQQQQQ corrected

Explanation: LibraryStation detected an inconsistency in queue QQQQQQQQ.

System Action: The inconsistent queue is corrected. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3125I

Unexpected member identifier IIIIIIII

Explanation: LibraryStation detected an abnormal request table queue member IIIIIIII.

System Action: The unexpected queue member is removed from the queue. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3126I

Unexpected status SSSSSSSS for request member MMMMMMMM

Explanation: LibraryStation detected an unexpected status SSSSSSSS during request completion processing for queue member MMMMMMMM.

System Action: The member is removed from the request queue. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3128I

LM has been restarted; LM state is RUN

Explanation: The LibraryStation Library Manager (LM) was restarted. The current state is RUN.

System Action: LibraryStation processing continues.

User Response: None.

SLS3129I

Queue access for member *MMMMMMMM* failed

Explanation: The LibraryStation Library Manager (LM) detected an abnormal request queue accessing member *MMMMMMMM*.

System Action: The Library Manager terminates. LibraryStation will attempt to recover.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3130I

Process *CCCCCCCC* terminated; status *SSSSSSSS*, process id *PPPPPPPP*

Explanation: LibraryStation detected an exiting process for command *CCCCCCCC* with status *SSSSSSSS*.

System Action: LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3131I

Exit status *SSSSSSSS* received from *CCCCCCCC*, process id *PPPPPPPP*

Explanation: LibraryStation detected an exiting process for command *CCCCCCCC* with status *SSSSSSSS*.

System Action: LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3132I

CCCCCCCC process failed to start up

Explanation: LibraryStation detected a process creation failure for command *CCCCCCCC*.

System Action: The failed process is removed. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3134I

Query request not found on request queue

Explanation: LibraryStation was unable to find the request queue member for a query server request.

System Action: The query server request is not processed. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3201I

Unmapped previously registered RPC service

Explanation: LibraryStation is registering as an RPC service but was already registered. The previous registration is dropped.

System Action: LibraryStation processing continues.

User Response: None.

SLS3202I

Creation of RPC TCP service failed

Explanation: LibraryStation was attempting to assign port, socket, and transport identifiers for RPC TCP services and was unable to do so.

System Action: LibraryStation continues to attempt the assignation every 30 seconds.

User Response: Verify that all software required for network communications has been initiated.

SLS3203I

Registration of RPC TCP service failed

Explanation: LibraryStation was unable to register as an RPC TCP service.

System Action: LibraryStation continues to attempt to register every 30 seconds.

User Response: Verify that all software required for network communications has been initiated.

SLS3204I

Creation of RPC UDP service failed

Explanation: LibraryStation was attempting to assign port, socket, and transport identifiers for RPC UDP services and was unable to do so.

System Action: LibraryStation continues to attempt the assignation every 30 seconds.

User Response: Verify that all software required for network communications has been initiated.

SLS3205I

Registration of RPC UDP service failed

Explanation: LibraryStation was unable to register as an RPC UDP service.

System Action: LibraryStation continues to attempt to register every 30 seconds.

User Response: Verify that all software required for network communications has been initiated.

SLS3206I

Initiation of CSI failed

Explanation: LibraryStation was unable to initialize the CSI component. The initialization failed due to conditions other than the network interface service.

System Action: LibraryStation CSI attempts to initialize five times. If the CSI is unable to initialize, LibraryStation terminates.

User Response: Contact StorageTek Software Support.

SLS3207I

Creation of connect queue failed

Explanation: The LibraryStation CSI connection queue could not be created.

System Action: LibraryStation CSI initiation fails.

User Response: Contact StorageTek Software Support.

SLS3208I

Creation of network output queue failed

Explanation: The LibraryStation CSI network output queue could not be created.

System Action: LibraryStation CSI initiation fails.

User Response: Contact StorageTek Software Support.

SLS3209I

Queue member locate failed for CCCCCC queue, member DDDDD

Explanation: LibraryStation was attempting to locate a member of a queue and was unable to do so.

System Action: The member of the queue is ignored. LibraryStation processing continues.

User Response: None.

SLS3210I

Queue member deletion failed for CCCCCC queue, member DDDDD

Explanation: LibraryStation was attempting to delete a member of a queue and was unable to do so.

System Action: The member of the queue is ignored.

User Response: None.

SLS3211I

Operating system error DDDDD

Explanation: A system routine failure occurred.

System Action: LibraryStation processing continues.

User Response: Contact StorageTek Software Support.

SLS3212I

Unexpected signal received, value *DDDDD*

Explanation: LibraryStation received an undefined signal.

System Action: The signal is ignored.

User Response: None.

SLS3213I

Invalid RPC procedure number

Explanation: The LibraryStation CSI detected an invalid RPC procedure number.

System Action: The request is ignored.

User Response: None.

SLS3215I

RPC reply to client request message failed

Explanation: An attempt to acknowledge a client request message failed.

System Action: LibraryStation processing continues.

User Response: None.

SLS3216I

RPC TCP client connection failed, reason *CCCCCCCC*, address *DDDDDDDDDD*, port *DDDDDDDD*

Explanation: The LibraryStation CSI attempted to connect with the client but failed.

System Action: LibraryStation continues to attempt to connect every 30 seconds.

User Response: Verify that all software required for network communications has been initiated.

SLS3217I

RPC UDP client connection failed, reason *CCCCCCCC*, address *DDDDDDDDDD*, port *DDDDDDDD*

Explanation: The LibraryStation CSI attempted to connect with the client but failed.

System Action: LibraryStation continues to attempt to connect every 30 seconds.

User Response: Verify that all software required for network communications has been initiated.

SLS3218I

Invalid network protocol

Explanation: LibraryStation determined that the client request was neither UDP or TCP protocol.

System Action: LibraryStation ignores the client request.

User Response: Verify that TCP or UDP protocol is being used for client requests.

SLS3219I

Queue creation failure

Explanation: The LibraryStation CSI connection queue could not be initialized.

System Action: LibraryStation CSI initiation fails.

User Response: Contact StorageTek Software Support.

SLS3220I

Queue member status request failed for CCCCCCCC queue, member
DDDDD

Explanation: LibraryStation was attempting to locate a member of a queue and was unable to do so.

System Action: The member of the queue is ignored.

User Response: None.

SLS3221I

Queue member insert request failed for CCCCCCCC queue, member
DDDDD

Explanation: LibraryStation was attempting to add a member to a queue and was unable to do so.

System Action: The new member is discarded.

User Response: None.

SLS3222I

Cleanup of CCCCCCCC queue, member DDDDD removed

Explanation: LibraryStation has removed a member from a queue that has aged beyond the time specified by the REQTIME keyword on the LSINIT initialization parameter statement.

System Action: LibraryStation processing continues.

User Response: None.

SLS3223I

Undefined message has been discarded

Explanation: LibraryStation received a message packet that was too small or that was undefined to LibraryStation.

System Action: LibraryStation discards the message packet.

User Response: None.

SLS3225I

Message for unknown client discarded

Explanation: LibraryStation received a message packet for an unknown client.

System Action: LibraryStation discards the message packet.

User Response: None.

SLS3227I

Cannot read message from LM

Explanation: The LibraryStation CSI was unable to read a message packet from the Library Manager (LM).

System Action: LibraryStation ignores the message packet.

User Response: None.

SLS3228I

Cannot send message to network, reason CCCCCCCC, address
DDDDDDDDDD, port DDDDD

Explanation: LibraryStation attempted to send a message packet to the network but was unable to do so.

System Action: The message packet is discarded.

User Response: None.

SLS3230I

XDR message translation failure

Explanation: LibraryStation attempted to translate a field of a client message and failed.

System Action: LibraryStation ignores the message.

User Response: None.

SLS3231I

Error freeing XDR argument memory

Explanation: LibraryStation attempted to free memory containing XDR arguments and failed.

System Action: LibraryStation processing continues.

User Response: Contact StorageTek Software Support.

SLS3232I

Dropping queue message, address DDDDDDDDDDD, port DDDDD,
identifier DDDDD, protocol DDDDD, connect type DDDDD

Explanation: A client message has not been sent and the connect_agetime interval has expired. The client message is discarded.

System Action: The client message is deleted from the queue.

User Response: None.

SLS3233I

Improperly defined network host name or address

Explanation: LibraryStation attempted to determine the network host name or address and was unable to do so.

System Action: The LibraryStation CSI process fails.

User Response: Verify that the host network name and address are correctly defined in the TCP/IP configuration.

SLS3234I

Duplicate packet from LM discarded

Explanation: The LibraryStation Library Manager (LM) sent the same message packet more than once.

System Action: The duplicate message packet is ignored.

User Response: None.

SLS3236I

Duplicate packet from network discarded, address DDDDDDDDDD,
process ID DDDDD, sequence number DDDDDDDD

Explanation: The network sent a duplicate message packet.

System Action: The duplicate packet is ignored.

User Response: None.

SLS3237I

Unexpected network failure status, error *DDDD*

Explanation: A system routine failure occurred. The network error number is displayed. The description of each possible error number follows.

Error Number:	Descriptive Error Text:
101	Interrupted system call
102	I/O error
103	Bad file number
104	Not enough core
105	Permission denied
106	Bad address
107	Invalid argument
108	File table overflow
109	Too many open files
110	Broken pipe
111	Operation would block
112	Operation now in progress
113	Operation already in progress
114	Socket operation on nonsocket
115	Destination address required
116	Message too long
117	Protocol wrong type for socket
118	Protocol not available
119	Protocol not supported
120	Socket type not supported
121	Operation not supp'd on socket
122	Protocol family not supported
123	Address fam not supp by proto
124	Address already in use
125	Can't assign requested address
126	Network is down
127	Network is unreachable
128	Network dropped conn on reset
129	Software caused conn abort
130	Connection reset by peer
131	No buffer space available
132	Socket is already connected

133	Socket is not connected
134	Can't send aft socket shutdown
135	Connection timed out
136	Connection refused
137	Host is down
138	No route to host
139	ICMP source quench received
140	Destination unreachable
141	USER configuration error
142	System related error
143	Transport provider ended
144	API subsystem ended

System Action: LibraryStation processing continues.

User Response: Contact StorageTek Software Support.

SLS3238I

Invalid command specified in message

Explanation: LibraryStation received an unrecognized command in a message packet.

System Action: The message packet is ignored.

User Response: None.

SLS3239I

Invalid type specified in message

Explanation: LibraryStation received an unrecognized type in a message packet.

System Action: The message packet is ignored.

User Response: None.

SLS3240I

Invalid connection queue aging time *TTTTT* specified; default of *DDDDDDDD* seconds substituted

Explanation: The LibraryStation initiation parameter REQTIME specified on the LSINIT control statement has an invalid value. This is the period of time after which LibraryStation will no longer retain messages for possible retransmission to client systems that were unreachable.

System Action: The default value of 172800 seconds, or 48 hours, was used.

User Response: The command should be corrected to avoid future error messages.

SLS3241I

Invalid location type specified in message

Explanation: LibraryStation received an unrecognized location type in a message packet.

System Action: The message packet is ignored.

User Response: None.

SLS3242I

Invalid version number *DDDDD* specified in message

Explanation: An unsupported or invalid version number was set in a message packet.

System Action: The message packet is ignored.

User Response: None.

SLS3243I

Invalid procedure specified in CSI message header

Explanation: The LibraryStation CSI message header contained an invalid procedure identifier.

System Action: LibraryStation continues to process the message packet.

User Response: None.

SLS3244I

Invalid translation syntax specified in CSI message header

Explanation: The LibraryStation CSI determined that the translation syntax was not XDR.

System Action: LibraryStation continues to process the message.

User Response: None.

SLS3245I

Invalid transmission protocol specified in CSI message header

Explanation: The LibraryStation CSI determined that the transmission protocol was not TCP, UDP, or ADI.

System Action: LibraryStation continues to process the message.

User Response: None.

SLS3246I

Network interface failure, attempting recovery

Explanation: The network interface has failed after being available.

System Action: LibraryStation frees up the network interface resources and attempts to restart the network interface.

User Response: Verify that all software required for network communications is operational.

SLS3247I

CSI network interface state {active|startup}

Explanation: The LibraryStation CSI network interface state is now active or is being restarted.

System Action: LibraryStation processing continues.

User Response: None.

SLS3256I

{Sending|Receiving} net CCCCCCCC,
{REQUEST|ACKNOWLEDGE|INTERMEDIATE|FINAL}, SSI seq: DDDDDDDD,
hdrseq: DDDDDDDD

Explanation: LibraryStation is either sending or receiving a message packet. This information is provided to allow the sending/receiving client to validate packet sequencing and uniqueness. CCCCCCCC is the command associated with the request. SSI seq: DDDDDDDD is the sequence number of the requesting client, and hdr seq: DDDDDDDD is the sequence number of the packet.

System Action: LibraryStation processing continues.

User Response: None.

SLS3300I

PDF error, key=XXXXXXXXXXXX, func=CCCCCCCC

Explanation: An unrecoverable I/O error has occurred. "Key" is the key of the record involved and "func" is the name of the routine where the I/O error occurred.

System Action: The I/O operation is not performed.

User Response: If the problem is hardware-related, reallocate the PDF and restart LibraryStation. If the problem persists, contact StorageTek Software Support.

SLS3301I

PDF error, incorrect length record: DDDD

Explanation: A record was retrieved from the database that was not the length that was expected. DDDD is the length of the record retrieved.

System Action: The I/O request will fail.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3302I

Error closing PDF

Explanation: An error was encountered while closing the Persistent Data File (PDF).

System Action: None.

User Response: None, except it may indicate a hardware problem with the device where the PDF resides.

SLS3303I

No LS drives configured

Explanation: During LibraryStation initialization, it was determined that no drives were LIBGENed for LibraryStation use.

System Action: Initialization continues but any network requests that need a drive will fail.

User Response: Add LibraryStation drives in the MVS/HSC LIBGEN.

SLS3304I

Unable to open the PDF

Explanation: During LibraryStation initialization, an attempt to open the Persistent Data File (PDF) failed.

System Action: LibraryStation will terminate.

User Response: Verify that the PDF has been properly allocated. If the problem persists, contact StorageTek Software Support.

SLS3350I

LS initialization started (VN.N.N)

Explanation: LibraryStation initialization has started. N.N.N is the LibraryStation version number.

System Action: None.

User Response: None.

SLS3351I

LS restarted task CCCCCC

Explanation: A LibraryStation task failed and was restarted.

System Action: None.

User Response: None.

SLS3352I

LS initialization complete

Explanation: LibraryStation has completed initialization.

System Action: None.

User Response: None.

SLS3353I

Invalid PID XXXXXXXX received

Explanation: An internal error was detected. A function returned an invalid value.

System Action: LibraryStation processing continues.

User Response: Contact StorageTek Software Support.

SLS3354I

LS task CCCCCC failed - terminating

Explanation: The LibraryStation task CCCCCC failed excessively.

System Action: LibraryStation terminates.

User Response: Attempt to restart LibraryStation with the LS INIT command. If LibraryStation continues to fail, contact StorageTek Software Support.

SLS3355I

Exit status (NNN), CCCCCC1, received from CCCCCC2

Explanation: A LibraryStation task CCCCCC2 terminated prematurely with the specified status.

System Action: If the status in CCCCCC1 is DATABASE_ERROR,RECOVERY_FAILED, or CONFIGURATION_ERROR, LibraryStation will terminate. Otherwise, it will attempt to restart the task.

User Response: If LibraryStation terminates, attempt to restart it with the LS INIT command. If LibraryStation continues to fail, contact StorageTek Software Support.

SLS3356I

Signal NN received from CCCCCC

Explanation: The LibraryStation task CCCCCC terminated after receiving the specified signal.

System Action: LibraryStation attempts to restart the task.

User Response: None.

SLS3357I

Error received, ret = *NNN*, error = *NNN*

Explanation: An internal error was received. A function returned an invalid value.

System Action: LibraryStation terminates.

User Response: Attempt to restart LibraryStation with the LS INIT command. If LibraryStation continues to fail, contact StorageTek Software Support.

SLS3358I

LS unable to create a task - terminating

Explanation: LibraryStation attempted to attach a task and failed.

System Action: LibraryStation terminates.

User Response: Attempt to restart LibraryStation with the LS INIT command. If LibraryStation continues to fail, contact StorageTek Software Support.

SLS3359I

LS task *CCCCCCC* failed to initialize

Explanation: A task attached by LibraryStation failed to signal the parent that it had completed initialization.

System Action: LibraryStation terminates.

User Response: Attempt to restart LibraryStation with the LS INIT command. If LibraryStation continues to fail, contact StorageTek Software Support.

SLS3360I

CCCCCCC received unexpected signal *NNN*

Explanation: A LibraryStation task received a signal it was not designed to handle.

System Action: LibraryStation processing continues.

User Response: Contact StorageTek Software Support.

SLS3361I

LS termination started

Explanation: LibraryStation has started terminating.

System Action: Termination continues.

User Response: None.

SLS3362I

LS termination complete

Explanation: LibraryStation has completed termination.

System Action: None.

User Response: None.

SLS3363I

Copyright (C) 1992, 2010, Oracle and/or its affiliates.
All rights reserved.

Explanation: This message is issued at LibraryStation initialization.

System Action: None.

User Response: None.

SLS3364I

Duplicate LSINIT command ignored

Explanation: A second LSINIT control statement was specified in the MVS/HSC parameter data set.

System Action: LSINIT commands after the first are ignored.

User Response: Remove the extra LSINIT statements from the MVS/HSC parameter data set.

SLS3365I

LS initialization deferred

Explanation: The DEFER option was specified in the LSINIT statement in the MVS/HSC parameter data set.

System Action: LibraryStation does not automatically initialize at MVS/HSC initialization.

User Response: Use the LS INIT operator command to start LibraryStation.

SLS3366I

LS active on CCCCCCCC

Explanation: At LibraryStation initialization, it was determined that another instance of LibraryStation was active. To prevent damage to the LibraryStation PDF, a SYSTEMS ENQ is used to ensure that no other copy of LibraryStation is active in the GRS ring. CCCCCCCC is the GRS SYSNAME on which the other instance of LibraryStation is active.

System Action: LibraryStation does not initialize.

User Response: Determine the correct host on which to execute LibraryStation. Shutdown LibraryStation on the other host. The ENQ qname is the HSC ENQ qname. This can be displayed with an HSC "D CDS" command. The ENQ rname is "LS:ACTIVE".

SLS3367I

LS not enabled for host

Explanation: While processing the STOP or INIT command, it was found that LibraryStation had not been enabled for the host with a valid LSINIT statement in the MVS/HSC parameter data set.

System Action: Command processing terminates.

User Response: Put a valid LSINIT statement in the MVS/HSC parameter data set and restart the MVS/HSC, or issue the command on a host that is enabled.

SLS3368I

LS stopped

Explanation: The LS STOP command has completed and LibraryStation has stopped.

System Action: None.

User Response: None.

SLS3369I

LS INIT command HOSTID CCCCCCCC does not match

Explanation: The HOSTID keyword was specified with the LS INIT command. However, the HOSTID specified does not match that of the executing host.

System Action: Command processing terminates.

User Response: Specify the command with the correct HOSTID or omit the HOSTID.

SLS3370I

Error opening dataset specified on LSDEF keyword

Explanation: The LSINIT keyword LSDEF indicated a data set name, but there was an error opening the data set.

System Action: LibraryStation does not initialize.

User Response: Correct the problem with the data set, or specify the command with the correct data set name.

SLS3371I

Value XXXXX not supported for CCCCCCCC DDDDDDDD parameter,
line *n*

Explanation: The definition file for LSDEF had an invalid value, XXXXX, for the DDDDDDDD parameter on the CCCCCCCC statement on line *n*.

System Action: LibraryStation continues initialization, but the statement is not used.

User Response: Correct the problem with the parameter value and reinitialize LibraryStation.

SLS3372I

Unrecognized statement CCCCCCCC found in LSDEF file, line *n*

Explanation: An initial keyword for a statement in the LSDEF file was found on line *n* that was not recognized as a valid keyword for the LSDEF file.

System Action: LibraryStation continues initialization, but the statement is not used.

User Response: Correct the keyword name or remove it and reinitialize LibraryStation.

SLS3373I

CLIENTID missing required keyword LUNAME or IPADDR, line *n*

Explanation: The CLIENTID statement on line *n* had none of LUNAME or IPADDR, or XCFNAME specified. One of these must be specified on the CLIENTID statement.

System Action: LibraryStation continues initialization, but the statement is not used.

User Response: Put one of the keywords on the CLIENTID statement and reinitialize LibraryStation.

SLS3374I

Disallowed duplicate value XXXXX on CCCCCC DDDDDDD parameter, line *n*

Explanation: The definition file for LSDEF had a value, XXXXX, for the DDDDDDD parameter on the CCCCCC statement on line *n*. The value duplicated a previous value, and the duplication is disallowed.

System Action: LibraryStation continues initialization, but the statement is not used.

User Response: Give the parameter a unique value and reinitialize LibraryStation.

SLS3375I

Medium MMMMMMM is incompatible with drive type DDDDDDD on DRVMED statement, line *n*

Explanation: A medium value was specified on the DRVMED statement on line *n* for a drive type with which it is incompatible.

System Action: LibraryStation continues initialization, but the statement is not used.

User Response: Use a medium value that is appropriate for the drive and reinitialize LibraryStation.

SLS3376I

LS does not support this MVS release

Explanation: An attempt was made to initialize LibraryStation on a release of MVS that it does not support.

System Action: LibraryStation does not initialize.

User Response: Initialize LibraryStation on a system that is MVS/SP 3 or MVS 4.2 and above.

SLS3379I

LibraryStation failed to initialize due to a startup parameter error

Explanation: The most likely cause is an invalid parameter in the LSINIT Control Statement. Refer to the *LibraryStation Administration and Configuration Guide*.

System Action: LibraryStation terminates.

User Response: Attempt to restart LibraryStation with the LS INIT command. If LibraryStation continues to fail, contact StorageTek Software Support.

SLS3380I

Ambiguous RETCOUNT parameter provided in LSINIT command string.

Explanation: RETCOUNT parameter is not usable with specified COMMTYPE.

System Action: The RETCOUNT parameter is ignored.

User Response: Either remove the RETCOUNT from the LSINIT statement or change COMMTYPE (LU6/XCF) to RPC.

SLS3381I

LS is in standby status

Explanation: Cross host recovery support for open systems clients (XHREC) was requested for this LibraryStation. Either DEFER was specified on the LSINIT statement or LibraryStation initialization determined that a LibraryStation is active on another host and has allocated the persistent data file.

System Action: None.

User Response: None.

SLS3382I

Standby LS notification sent

Explanation: Cross host recovery support was requested for this LibraryStation. When this LibraryStation terminated, a host communication was sent to all active HSCs. LibraryStations in standby status that receive this communication will attempt to become active.

System Action: None.

User Response: None.

SLS3383I

LS not active on this host

Explanation: The LS STOP command was issued but LibraryStation was not active on this host.

System Action: None.

User Response: None.

SLS3384I

Activate Standby not supported for this configuration

Explanation: The LS ACTIVATE STANDBY command was issued but LibraryStation on this host has allocated the PDF and has not been initialized with cross host recovery support.

System Action: None.

User Response: None.

SLS3385I

Standby LS notification received

Explanation: A cross host communication has been received requesting LibraryStation initialization.

System Action: If LibraryStation is in standby status on this host, initialization begins. The first LibraryStation to receive the request and begin initialization becomes active.

User Response: None.

SLS3386I

Too many values specified for VTSSLST parameter of the SPNUM statement

Explanation: More values were specified than the maximum allowed.

System Action: The SPNUM statement is ignored.

User Response: Either remove the SPNUM statement or change the values of the VTSSLST parameter.

SLS3387I

Unable to obtain configuration data for VIRTACS *vtssname*

Explanation: During initialization LibraryStation attempted to obtain configuration data from HSC for VIRTACS *vtssname*, but the configuration data was not available.

System Action: The VIRTACS *vtssname* is ignored, LibraryStation will continue processing the next VIRTACS statement.

User Response:

- If the VTSS *vtssname* is offline to HSC, vary it online and reinitialize LibraryStation.
- If the VTSS *vtssname* is not defined to HSC, either remove the VIRTACS statement or ignore the message.

SLS3401I

Invalid command CCCCCCCC

Explanation: An attempt was made to enter a command that was not a valid LibraryStation command.

System Action: The command is not executed.

User Response: Enter the correct command.

SLS3402I

Error processing CCCCCCCC command

Explanation: A system error occurred when processing a LibraryStation command.

System Action: The command is not executed.

User Response: Contact StorageTek Software Support.

SLS3403I

Command required

Explanation: An attempt was made to direct a command to LibraryStation but the command was missing.

System Action: The command is not executed.

User Response: Enter the correct command.

SLS3404I

{START|IDLE} command successfully executed

Explanation: A Start or Idle command was entered and has been successfully executed.

System Action: LibraryStation processing continues.

User Response: None.

SLS3406I

Command CCCCCCC not executed; LS not available

Explanation: An attempt was made to enter a command when LibraryStation was not active or was in standby status.

System Action: The command is not executed.

User Response: Once LibraryStation has been initialized and is active, re-enter the command.

SLS3407I

Command INIT not executed; LS already initialized

Explanation: The operator command ".LS INIT" was entered, but LibraryStation had already been initialized.

System Action: The INIT command is ignored. The system state remains unchanged.

User Response: None.

SLS3408I

DRIVE or DRIVEID keyword required

Explanation: A Vary command was entered and did not specify a drive identifier.

System Action: The command is not executed.

User Response: Re-enter the Vary command specifying a drive identifier.

SLS3409I

ONLINE or OFFLINE keyword required

Explanation: A Vary command was entered and did not specify ONLINE or OFFLINE.

System Action: The command is not executed.

User Response: Re-enter the Vary command specifying ONLINE or OFFLINE.

SLS3411I

LSM in driveid {AA:LL:PP:NN} not in configuration

Explanation: A command was entered referring to an invalid LSMid.

System Action: The command is not executed.

User Response: Re-enter the command specifying the correct LSMid.

SLS3412I

Request *DDDDD* not cancelled; request not active

Explanation: A Cancel command was issued for a requestid that was not active.

System Action: The command is not executed.

User Response: Re-enter the command specifying the correct requestid.

SLS3413I

Drive *CCCCCC* not configured to LS

Explanation: A command was entered referring to an invalid driveid.

System Action: The command is not executed.

User Response: Re-enter the command specifying the correct driveid.

SLS3414I

Request *DDDDD* is noncancelable

Explanation: A Cancel command was issued for a requestid that cannot be cancelled.

System Action: The command is not executed.

User Response: Re-enter the command specifying the correct requestid.

SLS3415I

Drive (*XXXX*) (*AA:LL:PP:NN*) varied {ONLINE|OFFLINE}

Explanation: A Vary command was entered for a drive and has successfully completed.

System Action: LibraryStation processing continues.

User Response: None.

SLS3416I

Server is {idle|idle pending|running|initializing|standby}

Explanation: A Display Status command was issued. The current state of LibraryStation is displayed.

Idle - LibraryStation has quiesced and is not accepting requests.

Idle pending - LibraryStation is quiescing and is not accepting requests.

Running - LibraryStation is active.

Initializing - LibraryStation is initializing.

Standby - LibraryStation is in standby status and is not accepting requests.

System Action: LibraryStation processing continues.

User Response: None.

SLS3417I

Mount (DDDDD1/DDDDD2) Dismount (DDDDD1/DDDDD2)
Enter (DDDDD1/DDDDD2) Eject (DDDDD1/DDDDD2)

Explanation: A Display Status command was issued. For each request type, DDDDD1 indicates the number of current requests and DDDDD2 indicates the number of pending requests.

System Action: LibraryStation processing continues.

User Response: None.

SLS3418I

Request DDDDD: command CCCCCCCC status CCCCCCCC

Explanation: A Display Request command was issued. The command and status of the associated request are displayed.

System Action: LibraryStation processing continues.

User Response: None.

SLS3419I

No requests outstanding

Explanation: A Display Request command was issued. No requests are active or queued at this time.

System Action: LibraryStation processing continues.

User Response: None.

SLS3422I

IDLE is currently pending

Explanation: An Idle command was issued. One or more requests are outstanding.

System Action: LibraryStation processing continues. When all outstanding requests have completed, the LibraryStation state becomes idle.

User Response: To determine which requests are outstanding, a Display Request command can be issued.

SLS3425I

ACS AA not in configuration

Explanation: A command was entered referring to an invalid ACSid.

System Action: The command is not executed.

User Response: Re-enter the command specifying the correct ACSid.

SLS3430I

Drive (XXXX) (AA:LL:PP:NN) currently in use

Explanation: A Vary command was entered referring to a drive that is in use.

System Action: The command is not executed.

User Response: Re-enter the command when the drive is available.

SLS3431I

VARY command currently in process for drive
(XXXX) (AA:LL:PP:NN)

Explanation: A Vary command was entered referring to a drive that is already the object of a previous Vary command.

System Action: The command is not executed.

User Response: Re-enter the command when the prior Vary command completes.

SLS3432I

LS DISPLAY command requires a display type

Explanation: A Display command was entered without specifying a display type.

System Action: The command is not executed.

User Response: Re-enter the Display command specifying the type of display.

SLS3433I

CCCCCCC command cancelled

Explanation: A Cancel command was entered and has successfully completed.

System Action: LibraryStation processing continues.

User Response: None.

SLS3434I

LS trace mask XXXXXXXX set for CCCC component

Explanation: A Trace command was entered and has successfully initiated tracing for the component specified.

System Action: LibraryStation processing continues.

User Response: None.

SLS3436I

{AA:LL:PP:NN} is an invalid driveid

Explanation: A command was entered referring to a driveid that is invalid.

System Action: The command is not executed.

User Response: Re-enter the command specifying a valid driveid.

SLS3437I

Operator command service has encountered an IPC failure

Explanation: An interprocess communication failure has occurred while attempting to process an operator command.

System Action: The operator command is not executed.

User Response: Contact StorageTek Software Support.

SLS3438I

Request ID (DDDDD) not in range (1-65535)

Explanation: A Query Request command was issued for an invalid requestid value.

System Action: LibraryStation processing continues.

User Response: Re-enter the command with a valid requestid value.

SLS3439I

Driveid format invalid

Explanation: A driveid was entered that did not conform to proper driveid format.

System Action: The operator command is not executed for that driveid.

User Response: Re-enter command specifying proper driveid format.

SLS3440I

{AA:LL:PP:NN}{ACS|LSM|PANEL|DRIVE} specification is invalid

Explanation: A driveid was entered that did not have a proper element specification.

System Action: The operator command is not executed for that driveid.

User Response: The displayed message gives the element in question: ACS, LSM, DRIVE, or PANEL. Re-enter the command with the proper element specification.

SLS3441I

Range exceeds 100 allowable drives

Explanation: A command was entered that specified a range of drives that was greater than 100.

System Action: Only the first 100 drives are used.

User Response: Re-enter the command specifying a range less than 100.

SLS3442I

Maximum allowed configured drives in request is 42

Explanation: A command was entered that specified a range of drives that contained more than 42 LibraryStation-configured drives.

System Action: Only the first 42 LibraryStation-configured drives are used.

User Response: Re-enter the command specifying less than 42 drives.

SLS3443I

Last drive processed was (XXXX)

Explanation: A command was entered that specified either more than 42 LibraryStation-configured drives, or a range that specified more than 100 total drives. The last drive processed is displayed.

System Action: LibraryStation processing continues.

User Response: Enter the command with less than 42 LibraryStation-configured drives or a range of fewer than 100 drives.

SLS3444I

{Drive|Drives} {XXXX/XXXX-XXXX} {is|are} not configured to LS

Explanation: A command was entered that contains drives that are not configured to LibraryStation. The drives are listed.

System Action: LibraryStation processing continues.

User Response: Re-enter the command with drives that are configured to LibraryStation.

SLS3445I

Component id CCCC is not valid

Explanation: A Trace command was entered with an invalid component id.

System Action: LibraryStation processing continues.

User Response: Re-enter the command with a valid component id.

SLS3447I

LS services have terminated

Explanation: While responding to an operator command, LibraryStation has become unavailable.

System Action: None.

User Response: Examine the SYSLOG and the HSC job log to determine why LibraryStation became unavailable. Re-enter the command after LibraryStation becomes available.

SLS3448I

Cancel of request DDDDD scheduled

Explanation: A Cancel command was entered for a specific requestid and has been successfully initiated.

System Action: LibraryStation processing continues.

User Response: None.

SLS3463I

Current CCCCCC value is DDDDDDD

Explanation: The SET command was entered with no value specified for the SET parameter. The SET command displays the current value for the option CCCCCC is the parameter specified on the SET command. DDDDDDD is the current value for the parameter.

System Action: None.

User Response: None.

SLS3464I

CCCCCCCC set to DDDDDDDD

Explanation: The parameter specified on the SET command has been set to the indicated value. CCCCCCCC is the option entered on the SET command. DDDDDDDD is the value entered on the SET command.

System Action: None.

User Response: None.

SLS3465I

SET parameter missing

Explanation: A SET command was issued with no parameter.

System Action: SET command processing terminates.

User Response: Refer to the *LibraryStation Configuration and Administration Guide* or issue the LS "Display CMd SET" command to determine the supported parameters for the SET command.

SLS3466I

Value not supported for SET CCCCCCCC parameter, value DDDDDD ignored

Explanation: An invalid value was specified for the SET command option. CCCCCCCC is the parameter entered on the SET command. DDDDDD is the value entered on the SET command.

System Action: SET command processing terminates.

User Response: Refer to the *LibraryStation Configuration and Administration Guide* to determine the supported values for the specified SET parameter.

SLS3467I

Drive (XXXX) (AA:LL:PP:NN) Type drive_type{ONLINE|OFFLINE}, {in use|available|not in library}[,VVVVVV]

Explanation: A Display DRive command was issued. The driveid is displayed in MVS device number and LibraryStation driveid formats. The drive type reported is as defined on an LSDEF DRIVETYP NAME statement. The drive state and status are displayed. If a volume is mounted on the drive, the volume serial is also displayed.

System Action: LibraryStation processing continues.

User Response: None.

SLS3468I

Server status

Server is {IDLE|IDLE PENDING|RUN|INITIALIZING|STANDBY}
 Mount (DDDDD1/DDDDD2) Dismount (DDDDD1/DDDDD2)
 Enter (DDDDD1/DDDDD2) Eject (DDDDD1/DDDDD2)

Explanation: A Display Status command was issued. The current state of LibraryStation is displayed.

IDLE - LibraryStation has quiesced and is not accepting requests.

IDLE PENDING - LibraryStation is quiescing and is not accepting requests.

RUN - LibraryStation is active.

INITIALIZING - LibraryStation is initializing.

STANDBY - LibraryStation is in standby status and is not accepting requests.

For each request type, DDDDD1 indicates the number of current requests and DDDDD2 indicates the number of pending requests.

System Action: LibraryStation processing continues.

User Response: None.

SLS3469I

Request status XXX

Request DDDDD: command CCCCCCCC status CCCCCCCC

Explanation: A Display Request command was issued. The command and status of the associated request are displayed. DDDDD is the requestid of the Display Request command just issued.

System Action: LibraryStation processing continues.

User Response: None.

SLS3470I

Trace command status

LS trace mask XXXXXXXX set for CCCC component Component id
 CCCC is not valid

Explanation: A Trace command was entered. The trace mask is displayed for every component specified unless the component id entered is invalid.

System Action: LibraryStation processing continues.

User Response: Re-enter the command with a valid component id for any component ids that were invalid.

SLS3471I

Vary command status

```

Drive (XXXX) (AA:LL:PP:NN) varied {ONLINE|OFFLINE}
Drive (XXXX) (AA:LL:PP:NN) currently in use
VARY command currently in process for drive
(XXXX) (AA:LL:PP:NN)
LSM in driveid {AA:LL:PP:NN}not in configuration
ACS in driveid {AA:LL:PP:NN}not in configuration
{AA:LL:PP:NN}{ACS|LSM|PANEL|DRIVE} specification is invalid
Drive {XXXX|AA:LL:PP:NN}is not configured to LS
    
```

Explanation: A Vary command was entered for one or more drives. One message line is created for each drive in the request. The message line contains the status of the vary request for that drive. The Vary command has either completed successfully, been issued before for the drive or the drive is busy and cannot be varied at this time

Input to the command may have been invalid or incomplete. An invalid or unconfigured drive may have been specified as input to the Vary command. The specification of the drive id may be invalid. The drive may not be defined to LibraryStation.

System Action: LibraryStation processing continues.

- If the drive has been successfully varied, no response is required.
- If the drive is in use, re-enter the command when the drive is available.
- If a previous Vary command for a drive is in process, re-enter the command when the prior Vary command completes.
- If the LSM or ACS are not configured, re-enter the command specifying the correct LSMid or ACSid.
- If the driveid specification was incorrect, the displayed message provides the element in question: ACS, LSM, DRIVE or PANEL. Re-enter the command with the proper element specification.
- If the drive is not configured to LibraryStation, re-enter the command with drives that are configured.

SLS3472I

Display drive response

```
Drive (XXXX) (AA:LL:PP:NN) Type drive_type
{ONLINE|OFFLINE}, {in use|available|not in library} [,VVVVVV]
LSM in driveid {AA:LL:PP:NN} not in configuration
ACS in driveid {AA:LL:PP:NN} not in configuration
{AA:LL:PP:NN} {ACS|LSM|PANEL|DRIVE} specification is invalid
Drive {XXXX|AA:LL:PP:NN} is not configured to LS
```

Explanation: A Display DRIve | DRIVEId command was entered for one or more drives. One message line is created for each drive in the request. The message line contains the status of that drive. The driveid is displayed in MVS device number and LibraryStation driveid formats. The drive type reported is as defined on an LSDEF DRIVETYP NAME statement. The drive state and status are displayed. If a volume is mounted on the drive, the volume serial is also displayed.

Input to the command may have been invalid or incomplete. An invalid or unconfigured drive may have been specified as input to the Display DRIve | DRIVEId command. The specification of the driveid may be invalid. The drive may not be defined to LibraryStation.

System Action: LibraryStation processing continues.

- If the drive has been successfully displayed, no response is required.
- If the LSM or ACS are not configured, re-enter the command specifying the correct LSMid or ACSid.
- If the drive specification was incorrect, the displayed message provides the element in question: ACS, LSM, DRIVE or PANEL. Re-enter the command with the proper element specification.
- If the drive is not configured to LibraryStation, re-enter the command with drives that are configured.

SLS3473I

```

Clearlock response
Drive (XXXX) (AA:LL:PP:NN) {Status: all locks are cleared|Status:
no lock found for resource|Error: SSSSSSSS}
LSM in driveid {AA:LL:PP:NN} not in configuration
ACS in driveid {AA:LL:PP:NN} not in configuration
{AA:LL:PP:NN}{ACS|LSM|PANEL|DRIVE} specification is invalid
Drive {XXXX|AA:LL:PP:NN} is not configured to LS
    
```

Explanation: .A CLrlock DRive|DRIVEId command was entered for a single drive. The drive and the status of the Clearlock are displayed. If all locks were cleared, this indicates that the drive no longer has any outstanding lock associated with it and is now available for use. If no locks were found, the drive was either entered incorrectly or there is some other problem that is causing it to be unavailable.

Input to the command may have been invalid or incomplete. An invalid or unconfigured drive may have been specified as input to the CLrlock DRIVE command. The specification of the drive may be invalid. The drive may not be defined to LibraryStation. If an unexpected error response is encountered, the error message format displays the clear_lock_drv_status SSSSSSSS to assist in problem analysis.

System Action: If lock(s) are found for the specified drive, they are removed from the system. LibraryStation processing continues.

- If all locks were cleared, the drive is now available for use. If no locks were found, the drive or driveid may have been specified incorrectly. Continue diagnosis to determine the problem.
- If the LSM or ACS are not configured, re-enter the command specifying the correct LSMid or ACSid.
- If the driveid specification was incorrect, the displayed message provides the element in question: ACS, LSM, PANEL, or DRIVE. Re-enter the command with the proper element specification.
- If the drive is not configured to LibraryStation, re-enter the command with a drive that is configured.
- If an error was encountered, refer to the *CSC Developer's Toolkit, ACSAPI Programmer's Guide* for a list of the clear_lock_drv_status and drv_status. If an unexpected error response is encountered that cannot be diagnosed, Contact StorageTek Software Support.

SLS3475I

Current Trace Settings:

Explanation: The LibraryStation Trace command has been issued with no parameters. The SLS3475I message lists all of the LibraryStation components with their corresponding trace map bit settings.

System Action: None.

User Response: None.

SLS3477D

VAL '8XXXXXXXX' or greater may impact system performance; Reply 'YES' to Trace

Explanation: A Trace VAL of '8XXXXXXXX' traces module entry and exit to GTF. This can impact system performance.

System Action: LibraryStation tracing waits for an operator response.

User Response: Respond with "YES" if tracing is to proceed. Any other response cancels the TRace request.

SLS3478I

LS Trace request canceled

Explanation: A reply other than "YES" was received from an SLS3477D WTOR message. A Trace VAL value of '80000000' or greater may impact system performance; Reply "YES" to allow tracing. Any other response cancels the LS Trace request.

System Action: The LS Trace request is canceled.

User Response: Re-issue the LS Trace command with a VAL less than '80000000' or respond "YES" to the SLS3477D message if tracing is to proceed.

SLS3599I

LS command processing not active

Explanation: An attempt was made to enter a command when LibraryStation was not active.

System Action: The command is not executed.

User Response: Once LibraryStation has been initialized, re-enter the command.

SLS3601I

Processing VOLUME(*volser*), DRIVE(*AA:LL:PP:NN*), COMMTYPE(*CCC*),
{TCPNAME(*CCCC*) | SYMDESTN(*CCCCCCCC*) | XCF(*G G G G, M M M M*) }

Explanation: The diagnostic test program is attempting to run diagnostic tests using volume *volser* on the library drive specified (*AA:LL:PP:NN*). If the COMMTYPE is RPC the tests will be done using the TCP protocol identified by TCPNAME. If the COMMTYPE is LU6 then the tests will be done using the symbolic destination name identified by SYMDESTN. If the COMMTYPE is XCF then the tests will be done using XCF with the group and member name specified.

System Action: The diagnostic test program continues.

User Response: None.

SLS3602I

{HSC|LS} is inactive or not installed

Explanation: The diagnostic test program has determined that the MVS/HSC or LibraryStation has not been installed and/or activated.

System Action: The diagnostic test program ends execution of its test suites.

User Response: Verify that the MVS/HSC and LibraryStation are correctly installed and started.

SLS3603I

Unable to acquire a network packet buffer

Explanation: The diagnostic test program has failed while attempting to acquire the memory to create a network request to send to LibraryStation.

System Action: The diagnostic test program ends execution of its test suites.

User Response: Contact StorageTek Software Support.

SLS3604I

Unable to initialize RPC network communications

Explanation: The diagnostic test program has been unsuccessful in establishing an RPC connection with the LibraryStation program. This message is accompanied by other more detailed messages that specify the reason for the connection failure.

System Action: The diagnostic test program ends execution of its test suites.

User Response: Examine the messages issued immediately before this summary message. Remedy the problems listed in these messages and run the diagnostic test program again.

SLS3606I

RPC error sending {QUERY|MOUNT|DISMOUNT} request to network task

Explanation: The diagnostic test program has been unsuccessful in sending an RPC message to the LibraryStation program. The RPC message contained a (QUERY|MOUNT|DISMOUNT) request. This message is accompanied by other more detailed messages that specify the reason for the transmission failure.

System Action: The diagnostic test program ends execution of its test suites.

User Response: Examine the messages issued immediately before this summary message. Remedy the problems listed in these messages and run the diagnostic test program again.

SLS3607I

{QUERY|MOUNT|DISMOUNT} request successfully sent to network task

Explanation: The diagnostic test program has been successful in sending an RPC message to the LibraryStation program. The message contains a (QUERY|MOUNT|DISMOUNT) request.

System Action: The diagnostic test program continues execution of its test suites.

User Response: None.

SLS3608I

Time out waiting for {ACKNOWLEDGEMENT|RESPONSE} from
{QUERY|MOUNT|DISMOUNT} request

Explanation: The diagnostic test program has timed out waiting for an RPC message from the LibraryStation program. This message was expected to contain an (ACKNOWLEDGEMENT|RESPONSE) from a message successfully sent that contained a (QUERY|MOUNT|DISMOUNT) request.

System Action: The diagnostic test program ends execution of its test suites.

User Response: Examine the MVS SYSLOG for messages pertaining to LibraryStation activity. If messages indicate that LibraryStation received the diagnostic program request and responded, compare the destination program number, address, and port with the same information written to the diagnostic program SYSPRINT data set. Contact StorageTek Software Support for assistance.

SLS3611I

Failure creating UDP transport mapping

Explanation: The diagnostic test program was unsuccessful in establishing a UDP transport (socket) to use for communications with LibraryStation.

System Action: The diagnostic test program ends execution of its test suites.

User Response: Contact StorageTek Software Support.

SLS3612I

Failure registering as a client

Explanation: The diagnostic test program was unsuccessful in registering with RPC as a client service for communications with LibraryStation.

System Action: The diagnostic test program ends execution of its test suites.

User Response: Contact StorageTek Software Support.

SLS3613I

Failure creating RPC connection, RPC msg is *MMMMM*

Explanation: The diagnostic test program was unsuccessful in establishing a UDP connection with the LibraryStation registered program number.

System Action: The diagnostic test program ends execution of its test suites.

User Response: Contact StorageTek Software Support.

SLS3614I

Failure sending RPC request, RPC msg is *MMMMM*

Explanation: The diagnostic test program was unsuccessful in sending a message using the UDP protocol to the LibraryStation registered program number.

System Action: The diagnostic test program ends execution of its test suites.

User Response: Contact StorageTek Software Support.

SLS3615I

Invalid RPC procedure number received

Explanation: The diagnostic test program received a message from LibraryStation or another application that it could not identify.

System Action: The diagnostic test program ends execution of its test suites.

User Response: Contact StorageTek Software Support.

SLS3616I

Network packet error occurred in XDR translation

Explanation: The diagnostic test program was unsuccessful in decoding (deserializing) a message received from LibraryStation or another application.

System Action: The diagnostic test program ends execution of its test suites.

User Response: Contact StorageTek Software Support.

SLS3617I

QUERY SERVER response: state {RUNNING | IDLE | IDLE_PENDING},
status {SUCCESS | PROCESS_FAILURE | DATABASE_ERROR}, free
cells NNNNNN

Explanation: The diagnostic test program has received and decoded a final response message for a Query_server request that it sent to LibraryStation. The message contains the results that LibraryStation sent to the diagnostic test program. "Free cells" indicates all free cells in all ACSs.

System Action: The diagnostic test program continues execution of its test suites.

User Response: None.

SLS3618I

MOUNT response: valid volser, drive AA:LL:PP:NN, status
CCCCCCCCCC

Explanation: The diagnostic test program has received and decoded a final response message for a Mount request for valid *volser* on driveid *AA:LL:PP:NN* that it sent to LibraryStation. The message contains the Status request that LibraryStation sent to the diagnostic test program.

System Action: The diagnostic test program continues execution of its test suites.

User Response: None.

SLS3619I

DISMOUNT response: valid volser, drive AA:LL:PP:NN, status
CCCCCCCCCC

Explanation: The diagnostic test program has received and decoded a final response message for a Dismount request for valid *volser* on driveid *AA:LL:PP:NN* that it sent to LibraryStation. The message contains the Status request that LibraryStation sent to the diagnostic test program.

System Action: The diagnostic test program continues execution of its test suites.

User Response: None.

SLS3620I

Received request response for unsupported diagnostic command

Explanation: The diagnostic test program received a response message from LibraryStation for a command that it does not support.

System Action: The diagnostic test program ends execution of its test suites.

User Response: Contact StorageTek Software Support.

SLS3621I

{QUERY|MOUNT|DISMOUNT} request acknowledgment received

Explanation: The diagnostic test program received an acknowledgment message from LibraryStation for the command listed in the message text.

System Action: The diagnostic test program continues execution of its test suites.

User Response: None.

SLS3622I

Invalid library client parameters: *PPPPPPPP*, status *SSSSSSSS*

Explanation: The diagnostic test program determined that an input parameter was invalid.

System Action: The diagnostic test program ends execution of its test suites.

User Response: Correct the invalid parameter and rerun the diagnostic test program.

SLS3623I

Error obtaining transient program number

Explanation: The diagnostic test program was unable to obtain a program number to use for registering as a client service.

System Action: The diagnostic test program ends execution of its test suites.

User Response: Contact StorageTek Software Support.

SLS3624I

Error obtaining host name or inet address, status *CCCCCCCC*

Explanation: The diagnostic test program experienced an RPC error while querying RPC for the local host's internet address. This address is used to communicate with LibraryStation on this host. The status *CCCCCCCC* of the error is listed in the message text.

System Action: The diagnostic test program ends execution of its test suites.

User Response: Contact StorageTek Software Support.

SLS3625I

Library diagnostic test program ended with RC = {0|4|8|12}

Explanation: The diagnostic test program has ended. The highest return code encountered while running the diagnostic test program is listed in the message text.

System Action: All diagnostic test program processing is now ended.

User Response: Examine the return code. The description of the severity and nature of the return codes is

- 0 - All diagnostic tests completed successfully
- 4 - A diagnostic request to Query, Mount or Dismount was not successful
- 8 - LibraryStation or MVS/HSC software error (ABEND or STATUS_PROCESS_FAILURE)
- 12 - Network Communications failed or LibraryStation of MVS/HSC inactive or not installed

If the return code is not 0, then examine the messages in the SYSPRINT data set to determine the nature and extent of the error conditions. Correct the problems and rerun the diagnostic test program until a return code of 0 is returned.

SLS3627I

Invalid diagnostic request CCCCCCCC received

Explanation: A request was received that is not supported by the diagnostic test program.

System Action: The diagnostic test program ends execution of its test suites.

User Response: Contact StorageTek Software Support.

SLS3628I

Received network packet from netaddr NNNNNNNN, port NNNN

Explanation: The diagnostic test program received a message from LibraryStation or another application. The network address and port of the sender are listed in the message text.

System Action: The diagnostic test program continues execution of its test suites.

User Response: None.

SLS3629I

Failure unmapping previously registered RPC service

Explanation: The diagnostic test program was attempting to unmap its registered program number from RPC during shutdown and encountered an error.

System Action: Shutdown and termination of the diagnostic test program continues.

User Response: Contact StorageTek Software Support.

SLS3633I

```
Processing VOLUME volser, DRIVEID(AA:LL:PP:NN), COMMTYPE(CCC),
{TCPNAME(CCCCCCCC) | SYMDESTN(CCCCCCCC) | XCF(GGGG,MMMM) }
```

Explanation: The diagnostic test program is attempting to run diagnostic tests using volume *volser* on the library drive specified (AA:LL:PP:NN). If the COMMTYPE is RPC, the tests will be done using TCP identified by TCPNAME. If the COMMTYPE is LU6 then the tests will be done using the symbolic destination name identified by SYMDESTN. If the COMMTYPE is XCF then the tests will be done using XCF with the group and member name specified.

System Action: The diagnostic test program continues execution of its test suites.

User Response: None.

SLS3634I

```
Processing VIRTUAL_DRIVE(XXXX), COMMTYPE(CCC),
{TCPNAME(CCCCCCCC) | SYMDESTN(CCCCCCCC) | XCF(GGGG,MMMM) }
```

Explanation: The diagnostic test program is attempting to run diagnostic tests using virtual_drive XXXX where XXXX is the MVS unit address of the virtual_drive. If the COMMTYPE is RPC, the tests will be done using TCP identified by TCPNAME. If the COMMTYPE is LU6 then the tests will be done using the symbolic destination name identified by SYMDESTN. If the COMMTYPE is XCF then the tests will be done using XCF with the group and member name specified.

System Action: The diagnostic test program continues execution of its test suites.

User Response: None.

SLS3635I

```
QUERY DRIVE response: query_drive_status
{SUCCESS|PROCESS_FAILURE},VIRTUAL_DRIVE(XXXX), VOLUME volser,
drive_status{PROCESS_FAILURE|DRIVE_IN_USE|DRIVE_AVAILABLE}
```

Explanation: The diagnostic test program has received and decoded a final response message for a Query_Drive request that it sent to LibraryStation. The message contains the results that LibraryStation sent to the diagnostic test program. XXXX is the MVS unit address of the virtual_drive.

System Action: The diagnostic test program continues execution of its test suites.

User Response: None.

SLS3637I

```
Validate TCP/IP response: status SSSSSSSS
```

Explanation:

- If SSSSSSSS = PROCESS_FAILURE, the GETHOSTNAME or the GETHOSTBYNAME function has failed.
- If SSSSSSSS = SUCCESS, the GETHOSTNAME and GETHOSTBYNAME functions were successful.
- If SSSSSSSS = PROCESS_FAILURE, the SLGDIAG job ends with an RC=8.
- If SSSSSSSS = SUCCESS, the SLGDIAG job ends with an RC=0.

User Response: None.

SLS3638I

TCPIPTEST=YES is only valid when COMMTYPE=RPC

Explanation: The TCPIPTEST=YES parameter is only valid when COMMTYPE=RPC.

System Action: The SLGDIAG job ends with an RC=4.

User Response: Correct the COMMTYPE and resubmit the job.

SLS3701I

Unexpected vary state CCCCCCCC detected

Explanation: An invalid condition was detected.

System Action: The Vary request stops.

User Response: Contact StorageTek Software Support.

SLS3702I

Drive (XXXX) (AA:LL:PP:NN) now {ONLINE | OFFLINE}

Explanation: The specified drive has been varied online or offline.

System Action: None.

User Response: None.

SLS3726I

Invalid Mount/Dismount command CCCCCCCC received

Explanation: The LibraryStation Mount/Dismount process has received an unexpected command CCCCCCCC from the Library Manager (LM) component.

System Action: The processing of this unexpected command is aborted.

User Response: Contact StorageTek Software Support.

SLS3728I

RRRRRRRRRRRRR from client NNNNNNNNNNNNNNNN UUUUUUUUU of
CCCCCCC(VVVVVV) on drive(XXXX) (AA:LL:PP:NN) - {READ
auth'd|UPDATE auth'd|authorized}

Explanation: A network request RRRRRRRRRRRRRR from LibraryStation client netaddr NNNNNNNNNNNNNNNN client userid UUUUUUUUUU has attempted to access volume VVVVVV defined in security class CCCCCCCC. Drive (XXXX) (AA:LL:PP:NN) was specified in the request. Access is either READ or UPDATE authorized for a mount request; or simply authorized for a dismount request.

System Action: LibraryStation processing continues.

User Response: No response is required.

SLS3729I

RRRRRRRRRRRRR from client NNNNNNNNNNNNNNN of CCCCCC(VVVVVV)
on drive(XXXX) (AA:LL:PP:NN) - {READ authorized|UPDATE
authorized|authorized}

Explanation: A network request RRRRRRRRRRRRRR from LibraryStation client netaddr NNNNNNNNNNNNNNN has attempted to access volume VVVVVV defined in security class CCCCCC. Drive (XXXX) (AA:LL:PP:NN) was specified in the request. Access is either READ or UPDATE authorized for a mount request; or simply authorized for a dismount request.

System Action: Librarystation processing continues.

User Response: No response is required.

SLS3730I

RRRRRRRRRRRRR from client NNNNNNNNNNNNNNN UUUUUUUU of
CCCCC(VVVVVV) {on|from} drive(XXXX) (AA:LL:PP:NN) - Complete

Explanation: A network request RRRRRRRRRRRRRR from LibraryStation client netaddr NNNNNNNNNNNNNNN client userid UUUUUUUU has successfully completed the request for volume VVVVVV defined in security class CCCCCC using drive (XXXX) (AA:LL:PP:NN). For mount/dismount requests client userid UUUUUUUU is only visible if VOLACC(YES) has been specified in the LSINIT control statement. Client userid UUUUUUUU is never visible for mount scratch requests.

System Action: Librarystation processing continues.

User Response: No response is required.

SLS3800I

All lock identifiers in use

Explanation: A lock request has been received but there are no lock identifiers values that are available for use.

System Action: The lock request fails.

User Response: Probable client error. Contact StorageTek Software Support.

SLS3850I

Unable to register with APPC/MVS - not available

Explanation: LibraryStation has attempted to register for allocation with the APPC/MVS address space but APPC/MVS is not up.

System Action: LibraryStation will continue to try to register with APPC every 30 seconds.

User Response: Start APPC/MVS.

SLS3851I

APPC/MVS error: FFFFFFFF, AAAAAAAA, EE, RR, SSSSSSSS

Explanation: The LibraryStation function FFFFFFFF issued the APPC/MVS call AAAAAAAA which resulted in an error. EE is the return code and RR is the reason code returned by AAAAAAAA. SSSSSSSS is the symbolic destination name that LibraryStation used to register with APPC/MVS.

System Action: If the problem occurs during LibraryStation initialization, initialization fails. If the problem occurs after LibraryStation initialization is complete, LibraryStation processing continues, however, LU6.2 client communication may not be possible. LibraryStation will try to recover by attempting to reregister with APPC/MVS.

User Response: See *IBM Application Development: Writing Servers for APPC/MVS* (GC28-1070) for a detailed explanation of each possible combination of return code EE and reason code RR. Note: If an error occurs on the APPC/MVS "Register-for-Allocates" (ATBRFA2) call, this usually indicates there is a problem with the side information identified by the symbolic destination name SSSSSSSS. If the problem persists contact StorageTek Software Support.

SLS3852I

LU6.2 error: FFFFFFFF, CCCCCC, EE, [PPPPPPPP]

Explanation: An LU6.2 communication error occurred between LibraryStation and a client system. The LU6.2 LibraryStation function FFFFFFFF issued the CPI/C call CCCCCC which resulted in an error. EE is the error return code from CCCCCC. PPPPPPPP is the logical unit name of the client system.

System Action: All communication with the client system ceases. If the error occurred while LibraryStation is processing a request, all responses for that request are lost.

User Response: See *IBM System Application Architecture Common Programming Interface Communications Reference* (SC26-4399) for detailed information about the error return code. Note: A return code of 17 (CM_DEALLOCATED_ABEND) usually means that the client system has terminated abnormally and does not indicate a LibraryStation problem. If the problem persists, contact StorageTek Software Support.

SLS3855

TCP/IP fail: AAAAA.BBBBB, CCCCC, DDDDD

Explanation: The routine AAAAA has attempted a call to a TCP/IP routine and received a BBBBB condition. The numeric error code received is CCCCC and this decodes to the reason DDDDD.

System Action: Depending upon the routine involved and the conditions under which the error occurred, the connection to the client system may either be closed or the server function may shut down.

SLS3856I

Routine AAAAA reported: BBBBB

Explanation: The routine AAAAA has discovered the problem BBBBB.

System Action: Depending upon the routine involved and the conditions under which the error occurred, the connection to the client system may either be closed or the server function may shut down.

SLS3857I

TCP/IP Server started on port XXXXXX

Explanation: The server for CSCI requests over TCP/IP has been started and will listen for connections from clients on port XXXXX.

System Action: None.

User Response: None.

SLS3858I

TCP/IP Server stopped

Explanation: The server for CSCI requests has terminated.

System Action: None.

User Response: None.

SLS3902I

Memory allocation failed

Explanation: An attempt was made to allocate more memory than was available.

System Action: The current process fails. LibraryStation processing continues.

User Response: Contact StorageTek Software Support.

SLS3905I

Unexpected network communications error; status NNNNNNNN

Explanation: LibraryStation received a network interface failure. NNNNNNNN is the status code for the failure. Possible status codes are STATUS_NI_FAILURE and STATUS_RPC_FAILURE.

System Action: LibraryStation processing continues.

User Response: Verify that TCP/IP and the TCP/IP Portmapper are active, and that TCP/IP is configured properly. If the problem persists, contact StorageTek Software Support.

SLS3911I

Sending message to socket SSSSSSSS failed

Explanation: A LibraryStation process was unable to send a message to another process, socket name SSSSSSSS.

System Action: LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3912I

Signaling process PPPPPPPP with SSSSSSSS failed on EEEEEEEE

Explanation: LibraryStation was unable to signal process PPPPPPPP with signal SSSSSSSS. Error return code was EEEEEEEE.

System Action: The process signaled is assumed to be terminated. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3919I

LS is now {idle|idle pending|running}

Explanation: LibraryStation has received an Idle or Start command. The command status is idle, idle pending, or running.

System Action: LibraryStation processing continues.

User Response: None.

SLS3924I

Unexpected command CCCCCCCC

Explanation: LibraryStation has detected a request with an unexpected command type CCCCCCCC.

System Action: The request is not processed. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3931I

Unexpected request originator 00000000

Explanation: A LibraryStation request processor received a request from a type 00000000 process.

System Action: The request is ignored and the request processor terminates. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3932I

Unexpected signal SSSSSSSS

Explanation: A LibraryStation process received an unexpected signal SSSSSSSS.

System Action: The signal is ignored. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3933I

Unexpected state SSSSSSSS

Explanation: A LibraryStation process encountered a LibraryStation state SSSSSSSS it was not prepared for.

System Action: The process may or may not be able to recover; normally it will terminate. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3934I

Unexpected status SSSSSSSS

Explanation: A LibraryStation process encountered a LibraryStation status SSSSSSSS it was not prepared for.

System Action: The process may or may not be able to recover; normally it will terminate. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3935I

Unexpected type *TTTTTTTT*

Explanation: A LibraryStation process encountered a LibraryStation type *TTTTTTTT* it was not prepared for.

System Action: The process may or may not be able to recover; normally it will terminate. LibraryStation processing continues.

User Response: If the problem persists, contact StorageTek Software Support.

SLS3939I

Unsupported version *VVVVVVVV* packet discarded

Explanation: LibraryStation has received a request with an unsupported version *VVVVVVVV*.

System Action: Processing of the request is terminated and the request is discarded. LibraryStation processing continues.

User Response: Determine the LibraryStation network client(s) that is incompatible with the LibraryStation release being used. If the problem persists, contact StorageTek Software Support.

SLS3944I

CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC

Explanation: An error occurred in LibraryStation. *CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC* contains information about where the error occurred.

System Action: The active task terminates. A dump may be taken prior to the issuance of this message.

User Response: If LibraryStation terminates, attempt to restart it with the LS INIT operator command. If LibraryStation continues to fail, contact StorageTek Software Support.

SLS3945I

CCCCCCC1 authorize failed; client *NNNNNNNNNNNNNNNN* *CCCCCCC2* tried *CCCCC3* of *CCCCCCC4(VVVVVV)*

Explanation: A LibraryStation client, netaddr *NNNNNNNNNNNNNNNN*, userid *CCCCCCC2* (VOLACC(YES)) or the HSC address space (VOLAUTH(YES)) has attempted to access a volume and has been denied. The client issued a command *CCCCCCC1* that required authority READ or UPDATE to the volume. The volume *VVVVVV* is defined in security class *CCCCCCC4*.

System Action: The client request is rejected. LibraryStation processing continues.

User Response: If the problem persists, contact your security administrator.

SLS3946I

CCCCCCC1 received CCCCCC2 error rc = EE1 rsn = EE2 A nonzero return code was received from XCF macro CCCCCC2 The hexadecimal return code is EE1. The hexadecimal reason code is EE2.

Explanation: Depending of the severity of the problem, XCF signalling may continue.

User Response: Locate the return and reason code for the specified macro in the appropriate IBM manual documenting the XCF macros and attempt to correct the problem. For IXCJOIN, return code 8, reason code 8 indicates that the member already exists. If the problem persists, contact StorageTek Software Support.

SLS3947I

CCCCCCC1 received error rc = EE from CCCCCC2

Explanation: While processing requests related to XCF, the hexadecimal return code EE was received.

System Action: Depending of the severity of the problem, XCF signalling may continue.

User Response: Contact StorageTek Software Support.

SLS3998I

Format undefined for message code DDDD

Explanation: A LibraryStation module attempted to issue a message but no message template exists.

System Action: LibraryStation processing continues.

User Response: Contact StorageTek Software Support.

SLS3999I

CCCCCCC1 received unexpected status SSSSSSSSSSS from CCCCCC2

Explanation: One module CCCCCC1 received an unexpected return code from another module CCCCCC2.

System Action: LibraryStation processing continues.

User Response: Contact StorageTek Software Support.

Abend Reason Codes

Under certain conditions, LibraryStation purposely abends with a user completion code 1096 (X'448'). The LibraryStation routine that issues the abend typically takes an SVC dump and produces a SYS1.DUMP data set. It provides an abend reason code that appears in register 15 when the abend occurs.

LibraryStation abend reason codes are listed in the following table:

TABLE 6-2 Abend Reason Codes

Hex Value	Module Name	Description
X'1001'	SLGHADM	An error was detected when calling SLSSRMM to determine all valid drive and media types.
X'1002'	SLGHDRM	An error was detected when calling SLSSRMM to determine all valid media types for a specific drive type.
X'1003'	SLGHTDM	An error was detected when calling SLSSRMM to determine all valid media types for a specific drive type.

System Return Codes

System return codes (also called "Errno values") are displayed with LibraryStation messages. The system return code message represents the most recent error or warning condition detected by the runtime library. If no error or warning condition is detected, the value is 0.

System return codes are listed in the following table:

TABLE 6-3 System Return Codes

Number	Description
1	Math domain error.
2	Math range error
3	Out of memory
4	File not open.
5	File not found.
6	File attribute conflict.
7	Unsupported I/O operation.
8	No space in file.
9	Physical device error.
10	Previous error not cleared.
11	Data conversion error.

TABLE 6-3 System Return Codes (Continued)

Number	Description
12	Internal limit exceeded.
13	Undefined argument value.
14	System interface error.
15	File format errors.
16	Incorrect function usage.
17	Runtime system internal error.
18	Function precluded by runtime operations.
19	File in use.
20	Interrupted by signal.
21	Attempt to add record with duplicate key.
22	File contents correct or incorrect.
23	Program does not have access to this socket.
24	Nonblocking I/O in use and call would have blocked.
25	The connection has begun but control is returned so that the call will not block. The connection is complete when the select() call says that the socket is ready for writing.
26	(Nonblocking I/O) an earlier connect call has not yet completed.
27	The given file descriptor is not a socket.
28	Socket operation requires a destination address.
29	A datagram socket could not accommodate a message as large as this one.
30	Protocol not consistent with socket type.
31	Socket option or option level not consistent with protocol.
32	Unknown or invalid protocol.
33	Socket type not supported.
34	The call does not support this type of socket.
35	Invalid or unsupported protocol family.
36	Addressing family not supported or not consistent with socket type.
37	The given address is already in use.
38	The given address is not available on the local host.
39	Can't talk to the networking software on this machine, or the local host's network is down.
40	This host cannot reach the specified destination network.
41	The peer's host dropped or reset its network communications.
42	The local communications software aborted the connection.
43	The connection was reset by the peer.
44	The operating system did not have enough memory to perform the requested operation.

TABLE 6-3 System Return Codes (Continued)

Number	Description
45	The socket is already connected.
46	The given socket is not connected.
47	The session has already been shut down.
48	The attempt to establish a connection times-out.
49	The connection attempt was refused.
50	Socket operation failed because the destination host was down.
51	Socket operation failed because the destination host was unreachable.
100	Dead lock.
101	TCB attach failure.
102	TCB search failure.

Remote Procedure Call (RPC) Messages

Remote Procedure Call (RPC) messages (also called “Sperrno values”) are communication-related messages that provide information about remote communications between LibraryStation and a network client system.

RPC messages include the following:

RPC: SUCCESS

Explanation: Successful completion.

RPC: CAN'T ENCODE ARGUMENTS

Explanation: The client could not XDR the arguments it is to pass to the remote procedure.

RPC: CAN'T DECODE RESULT

Explanation: The client could not XDR the result returned from the remote procedure.

RPC: UNABLE TO SEND

Explanation: The client could not send an RPC CALL to the remote procedure.

RPC: UNABLE TO RECEIVE

Explanation: The client could not receive the RPC REPLY from the remote procedure.

RPC: TIMED OUT

Explanation: The client did not get a response from the server within an allowable amount of time.

RPC: INCOMPATIBLE VERSIONS OF RPC

Explanation: The version of the RPC protocol used by the server and the client are not equal.

RPC: AUTHENTICATION ERROR

Explanation: The authentication check failed on the remote system.

RPC: PROGRAM UNAVAILABLE

Explanation: The program is not available on the remote system.

RPC: PROGRAM/VERSION MISMATCH

Explanation: The program and version are not available on the remote system.

RPC: PROCEDURE UNAVAILABLE

Explanation: The requested procedure of the selected program on the remote system is not available for use.

RPC: CAN'T DECODE ARGUMENTS

Explanation: The remote system could not understand the arguments passed to the selected program.

RPC: REMOTE SYSTEM ERROR

Explanation: The remote system had a major failure while trying to execute the selected program.

RPC: UNKNOWN HOST

Explanation: The user selected a remote host system which is unknown to the DNR.

RPC: UNKNOWN PROTOCOL

Explanation: The user specified an unsupported protocol to be used for transport.

RPC: PORT MAPPER FAILURE

Explanation: The remote host's portmapper could not be communicated with properly.

RPC: PROGRAM NOT REGISTERED

Explanation: The remote program is not registered with the remote host's portmapper.

RPC: FAILED (UNSPECIFIED ERROR)

Explanation: The error was not specific enough to justify its own error code.

RPC: (UNKNOWN ERROR CODE)

Explanation: The error is not decipherable.

Configuration Worksheet

Use this worksheet to record site-specific information generated through completion of the LibraryStation configuration tasks included in [Chapter 2](#). This worksheet is helpful as a reference for future LibraryStation configuration modifications.

1. Enter a checkmark for each installed component.

✓	Software Component	Release
	LibraryStation	
	MVS	
	HSC	
	TCP/IP	
	APPC/MVS	
	XCF	
	VTAM	

✓	Hardware Component
	IBM or compatible processor running MVS (any IBM-supported version of z/OS)
	StorageTek Nearline Automated Cartridge System (ACS) library hardware
	Network Interface Adaptor
	SNA network hardware
	Coupling Facility (CF) or Channel to Channel (CTC) Device

2. Check Yes or No in response to each security question.

LibraryStation Security Measures	Yes ✓	No ✓
Do you plan to restrict the number of tape cartridge drives the network can use?		
Do you plan to enable SAF checks?		
Do you have a SAF product installed?		
Do you plan to restrict network access to volumes?		
Do you plan to check volume authorization on a client level?		
Do you plan to define restricted volumes to a security class other than TAPEVOL?		
Are you using RACF and would you like to deny access to undefined volumes?		
Do you plan to check command authorization on a client level?		
Do you want to log volume security violations?		

3. Enter the LibraryStation hostid to be defined in the HSC LIBGEN and used as the value for the NETHOST parameter in the LSINIT statement.

LibraryStation NETHOST Hostid:	
--------------------------------	--

4. Enter the device number and associated location information for each tape cartridge drive that will be assigned to LibraryStation.

ACS #	LSM #	Drive Panel #	Row #	Device #	Device Type

5. Enter information about the parameters you will include in the LSINIT statement.

At the minimum, you **must** enter site-specific variable information for NETHOST and COMMONSP. For the remaining parameters, enter information only if you plan to override default settings. If you have more than one initializing host, prepare a separate worksheet for each host.

Keyword	Enter Parameters for the LSINIT Control Statement
COMMONSP (required)	
NETHOST (required)	
NOPDF	
AUTHCLS	
CMDACC	
COMMTYPE	
CREQLOG	
DEFER	
HOSTID	
LSDEF	
PDF	
PDFX	
POOLCHK	
REQTIME	
RETCOUNT	
RETTIME	
SYMDESTN	
TCPNAME	
TCPPORT	
VOLACC	
VOLAUTH	
VOLNOPRF	
VSECLOG	
XCFGROUP	
XCFMEMBR	
XHREC	

6. Enter information about each of the CLIENTID and SPNUM statements you will include in the LSDEF file. Enter information only if you plan to override the default settings.

CLIENTID Statement:

Name	IP Address	LU Name

SPNUM Statement:

Number	Name	IP Address	LU Name

Message Change Summary

This appendix lists messages that have been added, changed, or deleted for LibraryStation Release 6.2.

New Messages

- SLS3386I
- SLS3407I
- SLS3477D
- SLS3478I

Changed Messages

- SLS3363I
- SLS3999I

Deleted Messages

None.

Migration and Coexistence

This appendix provides guidelines for migration from previous releases of LibraryStation to LibraryStation 6.2. Reverse migration is also discussed.

In addition, this appendix provides LibraryStation coexistence and compatibility guidelines.

Note – Your site may have specific conditions that require special precautions and procedures. If so, contact StorageTek Software Support for assistance.

Migration

Perform the following steps:

1. Ensure that HSC has already been migrated to release 6.2.
2. Make the LibraryStation 6.2 LINKLIB available through the MVS LINKLIST facility or a STEPLIB DD statement in the LibraryStation started task procedure.
3. Make any parameter changes necessary to enable new functionality, if desired.
4. Start LibraryStation 6.2.

Coexistence

For LibraryStation, the term “coexistence” implies the ability for a specific LibraryStation release to execute with a specific HSC release.

- LibraryStation 6.2 can coexist with HSC release 6.2 only.
- LibraryStation releases prior to 6.2 cannot coexist with HSC 6.2.

Compatibility With MVS/CSC

LibraryStation 6.2 is compatible with MVS/CSC release 6.2 only.

Gathering Diagnostic Materials

During problem resolution, Software Support may request that you provide specific diagnostic material. While printed format may be accepted, machine readable data (on magnetic tape) is preferred. For small amounts of data, Software Support may request that you FAX the data. Doing this may significantly reduce the time needed to resolve your problem.

LibraryStation Diagnostic Materials

The following LibraryStation diagnostic materials might be requested by Software Support:

- Details of circumstances
- GTF Trace data set
- MVS SYSLOG
- LAN packet trace
- Dump data set
- Startup parameters defined (including LSINIT and LSDEF control statements)
- HSC LIBGEN
- Copy of HSC Control Data Set (CDS)
- Copy of LibraryStation Persistent Data File (PDF)

Tape Format

If Software Support requests a tape of your diagnostic materials copy the requested files to tape using standard utility programs.

If Software Support requests a tape of your SYSMDUMP or SYS1.DUMP, dump using IEBGENER or IPCS DCB=(RECFM=FB,LRECL=4160,BLKSIZE=4160). Failure to follow this requirement may delay problem resolution.

Include a description of the tape contents, including any information necessary for Software Support to retrieve the files from the tape (i.e., tape volume serial number and label attributes, number of tape files, file names and attributes, etc.).

Glossary

Terms are defined as they are used in the text. If you cannot find a term here, check the index.

A

Abnormal end of task (abend) A software or hardware problem that terminates a computer processing task.

ACS-id A method used in the LIBGEN process to identify ACSs by using hexadecimal digits, 00 to nn.

ACS *See* Automated Cartridge System.

ACS library A library is composed of one or more Automated Cartridge Systems (ACSs), attached cartridge drives, and cartridges residing in the ACSs.

address Coded representation of hardware id, or the destination or origination of data.

allocation The assignment of resources to a specific task.

asynchronous transmission Character-oriented data transmission (as distinct from IBM's block-mode transmission).

Automated Cartridge System (ACS) A fully-automated, cartridge storage and retrieval library subsystem consisting of one or more Library Storage Modules (LSMs) connected by pass-thru ports.

Automated Cartridge System Library Software (ACSL) The library control software, which runs in the UNIX®-based Library Control System.

automatic mode A relationship between an LSM and all attached hosts. LSMs operating in automatic mode handle cartridges without operator intervention. This is the normal operating mode of an LSM that has been modified online. The opposite situation is "manual mode." *See* manual mode.

B

bar code A code consisting of a series of bars of varying widths. This code appears on the external label attached to the spine of a cartridge and is equivalent to the volume serial number (volser). This code is read by the robot's machine vision system.

BISYNC Binary Synchronous Communications. An early low-level protocol developed by IBM and used to transmit data on a synchronous communications link. It is a form of data transmission in which synchronization of characters is controlled by timing signals generated at the sending and receiving stations.

C

CAPid A CAPid uniquely defines the location of a CAP by the LSM on which it resides. A CAPid is of the form "AAL" where "AA" is the acs-id and "L" is the LSM number.

cartridge The plastic housing around the tape. It is approximately 4 inches (100 mm) by 5 inches (125 mm) by 1 inch (25 mm). The tape is threaded automatically when loaded in a transport. A plastic leader block is attached to the tape for automatic threading. The spine of the cartridge contains an OCR/Bar Code label listing the VOLSER (tape volume identifier).

Cartridge Access Port (CAP) An assembly that allows several cartridges to be inserted into or ejected from an LSM without human entry into the LSM.

cartridge drive (CD) A hardware device containing two or four cartridge transports and associated power and pneumatic supplies.

cartridge tape I/O driver Operating system software that issues commands (for example, read, write, and rewind) to cartridge subsystems. It is the software focal point for attaching a particular type of control unit. (An example is the StorageTek CARTLIB product.)

cartridge transport *See* transport.

CDS *See* Control Data Set.

cell A receptacle in the LSM in which a single cartridge is stored.

CGI Common Gateway Interface

channel A device that connects the host and main storage with the input and output devices' control units. A full-duplex channel has two paths (that is, 2 wires, or one wire with signals at two frequencies). A half-duplex channel requires that one port receives while the other transmits.

channel-to-channel (CTC) Refers to the communication (transfer of data) between programs on opposite sides of a channel-to-channel adapter.(I)

client The ultimate user of the ACS services as provided by the Library Control System.

client link The communications link between the LCS and a client.

client-server A model of interaction in a distributed system in which a program at one site serves a request to a program at another site and awaits a response. The requesting program is called a client; the program satisfying the request is called a server.

client system The system to which the LCS provides an interface to a StorageTek Automated Cartridge System.

Client System Component (CSC) Software that provides an interface between the Client Computing System's operating system and the StorageTek Library Control System (LCS).

coaxial cable A transmission medium used in data transmissions for networks using synchronous communications, as opposed to twisted-pair, the primary medium for asynchronous RS-232 communications.

complex A system composed of other systems, specifically the ACS server system and the client system.

connected mode A relationship between a host and an ACS. In this mode, the host and an ACS are capable of communicating (in the sense that at least one station to this ACS is online).

connection number The unique identifier on the server for a communications path. The number is assigned by TCP/IP to identify the unique connection between the server node and a specific port on the server, and the client node and a specific port on the client. The connection number exists only as long as the connection exists.

console The primary I/O device to control a session on a system.

control data set (CDS) The data set used by the host software to control the functions of the automated library. Also called a library database.

Control Path Adaptor (CPA) A Bus-Tech, Inc. hardware device that allows communications between a host processor's block multiplexer channel and a local area network.

Control Unit (CU) A microprocessor-based unit situated locally between a channel and an I/O device. It translates channel commands into device commands and sends device status to the channel.

coupling facility A special logical partition that provides high-speed caching, list processing, and locking functions in a sysplex.(I)

coupling facility channel A high bandwidth fiber optic channel that provides the high-speed connectivity required for data sharing between a coupling facility and the central processor complexes directly attached to it.(I)

coupling services In a sysplex, the functions of XCF that transfer data and status between members of a group residing on one or more MVS systems in the sysplex.(I)

cross-system coupling facility (XCF) XCF is a component of MVS that provides functions to support cooperation between authorized programs running within a sysplex.(I)

CTC Channel-to-channel.

Data Path Adapter A hardware device which translates from a client computing system's data protocol to the data protocol of the StorageTek Control Unit or IMU. An example is DEC's TC44-AA/BA STI-to-4400 ACS Interconnect.

D

data set A set of records treated as a unit.

data sharing The ability of concurrent subsystems or application programs to directly access and change the same data while maintaining data integrity.(I)

device number A four-digit hexadecimal number that uniquely identifies a device attached to a processor.

direct access storage device (DASD) IBM's term for a disk drive storage device.

disconnected mode A relationship between a host and an ACS. In this mode, the host and the ACS are not capable of communicating (there are no online stations to this ACS).

dotted-decimal notation The syntactic representation of a 32-bit integer that consists of four 8-bit numbers written in base ten with periods (dots) separating them. In TCP/IP descriptions, dotted-decimal notation is used for Internet addresses.

drive panel An LSM wall containing tape transports. The drive panel for a T9840 transport can contain either 10 or 20 transports. The drive panel for a non-T9840 transport can contain a maximum of 4 transports.

dump A printed representation of the contents of main storage at time *t*. This representation is used for debugging purposes.

dynamic server switching The capability of switching server processors when a system failure occurs on the active server.

E

ECART Enhanced Capacity Cartridge.

Enhanced Capacity Cartridge A cartridge that has a length of 1100 feet and can be used only on 36-track transports (i.e., 4490, 9490, and 9490EE).

Enterprise Systems Connection (ESCON) A set of products and services that provides a dynamically connected environment using optical cables as a transmission medium.(I)

error codes (EC) Numeric codes displayed by messages indicating the type of problem that caused an error.

error recovery procedures (ERP) Procedures designed to help isolate and, where possible, to recover from errors in equipment.

ESCON Enterprise Systems Connection.

Ethernet One LAN architecture using a bus topology that allows a variety of computers to be connected to a common shielded coaxial spine. The Ethernet architecture is similar to the IEEE 802.3 standard.

F

file A set of related records treated as a unit.

File Transfer Protocol (FTP) A TCP/IP command that provides a way to transfer files between machines connected through TCP/IP.

foreign socket One of two end-points in a TCP/IP connection-oriented protocol. Specifies the address of a foreign host that can connect to the server.

G

GB 1,073,741,834 bytes of storage

H

handshake A flow-of-control signal sent by one process to another.

helical cartridge A high capacity, helical scan cartridge that can hold up to 50GB of uncompressed data. This cartridge can be used only on RedWood (SD-3) transports.

host computer A computer that controls a network of computers.

Host Software Component (HSC) Software running on the Library Control System processor that controls the functions of the ACS.

Host Software Component utilities Utilities provided by the VM/HSC that can be executed from the HSCUTIL virtual machine. *See* client-initiated utilities.

HSC *See* Host Software Component.

HTTP Hypertext Transfer Protocol.

I

IEEE 802.3 A standard produced by the IEEE and accepted worldwide for local area networks using CSMA/CD (Carrier Sense Multiple Access with Collision Detection).

ICRC Improved Cartridge Recording Capacity. A compression and compaction feature that increases the amount of data that can be stored on a 1/2-inch cartridge.

initial program load (IPL) A process that activates a machine reset.

Interactive Storage Management Facility A series of applications for defining DFSMS/MVS storage groups and classes.

Internet A collection of networks using TCP/IP that functions as a virtual network.

Internet address The numbering system used to specify a network or host on that network for TCP/IP communications. Standard Internet address notation is dotted-decimal format.

Internet Protocol (IP) Formal description of messages and rules two networks use to exchange messages.

ISMF Interactive Storage Management Facility.

J

job control language (JCL) A problem oriented language designed to describe a job's processing requirements to an operating system.

JES Job entry subsystem.(I)

JES2 An MVS subsystem that receives jobs into the system, converts them to internal format, selects them for execution, processes their output, and purges them from the system. In an installation with more than one processor, each JES2 processor independently controls its job input, scheduling, and output processing. *See also* JES3.(I)

JES3 An MVS subsystem that receives jobs into the system, converts them to internal format, selects them for execution, processes their output, and purges them from the system. In complexes that have several loosely coupled processing units, the JES3 program manages processors so that the global processor exercises centralized control over the local processors and distributes jobs to them via a common job queue. *See also* JES2.(I)

L

LAN *See* local area network.

LCS *See* Library Control System.

LCS processor console The Library Control System processor console is used to control the VM operating system (for the VM-based LCS).

LCU *See* Library Control Unit.

LIBGEN The process of defining the configuration of a library to the VM/HSC.

library cartridge transport *See* transport.

library complex A library complex consists of one HSC Control Data Set (CDS) and may contain up to 256 Automatic Cartridge Systems (ACSs), each of which may contain up to 24 Library Storage Modules (LSMs).

library control component Software that controls the mounting and dismounting of cartridges in an ACS.

library control platform The hardware and software that provides the proper environment for the Library Control System.

library control processor Properly configured computer hardware that supports the operation of the Library Control System.

Library Control Software A library control component, the client system interface, and library utilities.

Library Control System (LCS) The library control platform and the Library Control Software.

Library Control Unit (LCU) The portion of an LSM that controls the movements of the robot.

library database A file or data set containing information about the location and status of the removable media volumes, such as cell location, scratch status. Also called a control data set (CDS).

library drive A cartridge drive in the ACS, as distinct from a stand-alone cartridge drive.

Library Management Unit (LMU) A hardware and software product that coordinates the activities of one or more LSMs/LCUs.

library mode The operation of a 4480 Cartridge Subsystem as part of a 4400 Automated Cartridge System, as opposed to manual mode, in which the operator inserts cartridges into the transports. *See* manual mode.

LibraryStation Software that allows MVS hosts to share ACS facilities with client systems.

Library Storage Module (LSM) The standard LSM (4410) a twelve-sided structure with storage space for up to around 6000 cartridges. It also contains a free-standing, vision-assisted robot that moves the cartridges between their storage cells and attached transports. *See* also PowderHorn, StreamLine SL8500, and WolfCreek.

LMU *See* Library Management Unit.

local area network (LAN) A network in a small (local) geographic area.

local port The designation of a given application or process among many that are available for a TCP/IP-capable host processor.

local socket The address combination of a TCP/IP-capable host's network address and a specific port for an application process.

logical port (LP) CLS software that interfaces with the client system. The CLSLP is one of the software components used to pass data between the client system and the VM/HSC.

LP *See* logical port.

LSM *See* Library Storage Module.

LSM-id An LSM-id is composed of the ACS-id joined to (concatenated with) the LSM number.

LSM number A method used to identify an LSM. An LSM number is the result of defining the SLIACS macro LSM parameter during a LIBGEN. The first LSM listed in this parameter acquires the LSM number of 00 (hexadecimal) the second LSM listed acquires a number of 01, and so forth, until all LSMs are identified (up to a maximum of 24 or hexadecimal 17).

M

manual mode Operation of a cartridge drive apart from an ACS. *See* library mode.

master LMU The LMU currently controlling the functional work of the ACS in a dual LMU configuration.

mixed configuration A configuration that contains different types of cartridge drives in both manual and library modes.

modem A device that enables digital data to be transmitted over an analog transmission facility.

multi-client The environment where more than one (homogenous or heterogeneous) client system is connected to one LCS.

MVS system console The MVS/CSC provides an operator interface through the MVS system console.

N

NCS Nearline Control Solution, consisting of SMC, HSC, StorageTek HTTP server, MVS/CSC, and LibraryStation.

O

OCR label Optical character recognition label. An external label attached to the spine of a cartridge that is both human and machine readable.

operator console In this publication, the operator console refers to the MVS client system console.

operating system (OS) Software that controls the execution of programs that facilitate overall system operation.

P

Pass-thru Port (PTP) A mechanism that allows a cartridge to be passed from one LSM to another in a multiple LSM ACS.

Persistent Data File (PDF) One or more VSAM data files that contain data objects including resource locks and drive status that are managed by the LibraryStation DBM.

physical port The communications hardware required to support a server/client link.

physical volume A physically bound unit of data file media. *See* cartridge.

pool A collection of tape cartridges having one or more similar features or attributes, such as a pool of scratch tapes.

PowderHorn (9310) The high-performance version of the standard LSM.

pre-configured package A storage server package including all hardware, software, and configuration parameter settings delivered by the vendor.

product change request (PCR) A request for enhancement to a product. Normally, this request comes from a client, but may come from Oracle.

program temporary fix (PTF) A software release designed to remedy one or a series of defects.

program update tape (PUT) One or more tapes containing updates to, or new versions of, the MVS/CSC system software.

protocol A formal description of message formats and the rules two or more machines must follow to exchange these messages.

R

Resource Access Control Facility (RACF) An IBM-licensed program that provides access control by identifying and verifying the users to the system.

recovery Automatic or manual procedures to resolve problems in the server system.

reel-id Identifier of a specific tape volume. Equivalent to volume serial number (VOLSER).

request Term used to refer to commands issued to the 4400 ACS to perform a tape-related function.

S

scratch tape A tape that is available to any user because it is not owned.

scratch tape subpool A defined subset of all scratch tapes. Subpools are composed of one or more ranges of volumes with similar physical characteristics (type of volume—reel or cartridge, reel size, length, physical location, and so on). Some installations may also subdivide their scratch pools by other characteristics such as label type.

SD-3 The StorageTek helical cartridge transport. Also known as RedWood.

server An NCS library control system such as HSC. In SMC a server is represented by a named SERVER path to a named TAPEPLEX. While the StorageTek HTTP server software component is required as the middle ware on the remote host, the server, as far as SMC is concerned is the NCS library control system operating on the remote host.

socket A unique address on a network plus a node address plus the id of one specific application on a specific network. An abstraction used by TCP/IP.

standard capacity cartridge A cartridge that can be used on any longitudinal transport (i.e., 4480, 4490, 9490, or 9490EE).

standby The status of a station that has been varied online but is connected to the standby LMU of a dual LMU ACS.

standby LMU The redundant LMU in a dual LMU configuration that is ready to take over in case of a Master LMU failure or when the operator issues a SWITCH command.

station A hardware path between the host computer and an LMU over which the VM/HSC and LMU send control information.

Storage Management Component (SMC) Software interface between IBM's OS/390 and z/OS operating systems and StorageTek real and virtual tape hardware. SMC performs the allocation processing, message handling, and SMS processing for the NCS solution.

storage server A set of hardware and software products designed to enable heterogeneous computer systems to use automated tape cartridge library services.

StreamLine (SL8500) A modular library scalable from 1,500 to over 200,000 cartridges in mainframe, Windows, UNIX, and supercomputer environments. The SL8500 utilizes hot swap components and multiple robots.

switchover The assumption of master LMU function by the standby LMU.

synchronous See BISYNC.

synchronous LAN Local area network built on synchronous communications.

sysplex A set of MVS systems communicating and cooperating with each other through certain multisystem hardware components and software services to process customer workloads.(I)

Systems Network Architecture (SNA) A description of the logical structure, formats, protocols, and operational sequences for transmitting information units through and controlling the configuration and operation of networks.

T

tape drive A tape processing device consisting of up to four transports in a cabinet. A drive can refer to an individual transport.

tape library management system (TLMS) TLMS, as used in this publication, refers to any tape library management system, not to CA-1.

TCP/IP Transmission Control Protocol/Internet Protocol.

trace event type Types of event traced through the system when tracing is enabled.

trace file A file that contains information useful for debugging the system.

transaction A specific set of input that triggers the execution of a specific process.

Transmission Control Protocol (TCP) An inter-network standard protocol that provides a full-duplex stream service.

transport An electro-mechanical device used to thread, position, and read or write from a tape.

U

UCB Unit Control Block.

userid Sometimes referred to as the VM userid, the userid is the name that identifies a specific “virtual machine” user or client.

utility Program that performs a function ancillary to the chief function(s) of a computer system.

V

virtual machine (VM) A functional simulation of a computer and its associated devices. Each virtual machine is controlled by a suitable operating system.

virtual storage A feature of the OS where main storage requirements are allocated by segments (or pages) as needed by programs, thus creating the apparent existence of unlimited or virtual storage.

Virtual Storage Manager (VSM) A storage solution that virtualizes volumes and transports in a VTSS buffer in order to improve media and transport use.

Virtual Tape Control System (VTCS) The primary host code for the Virtual Storage Manager (VSM) solution. This code operates in a separate address space, but communicates closely with HSC.

Virtual Tape Storage Subsystem (VTSS) The DASD buffer containing virtual volumes (VTVs) and virtual drives (VTDs). The VTSS is a StorageTek RAID 6 hardware device with microcode that enables transport emulation. The RAID device can read and write "tape" data from/to disk, and can read and write the data from/to a real tape drive (RTD).

Virtual Telecommunications Access Method (VTAM) IBM host-resident communications software that serves as a common interface for communications.

VM *See* virtual machine.

VM/SP or VM/XA A proprietary operating system of IBM corporation that consists mainly of two major components, CP and CMS.

volume A tape cartridge (data carrier) that is mounted or dismounted as a unit.

volume serial number (VOLSER) An identifier of a physical volume.

W

WolfCreek (9360) The high-performance LSM with a smaller capacity than the standard LSM.

X

XCF Cross-system coupling facility.

Z

ZCART An extended-enhanced cartridge that uses a thinner media to provide twice the capacity of the enhanced capacity (ECART) cartridge. This cartridge has a length of 2200 feet and can be used only on TimberLine 9490EE 36-track transports.

Numerics

802.3 See IEEE 802.3.

3270 IBM synchronous, block-mode, half-duplex terminals preferred for use with IBM 370 and related types of machine.

3270 protocol A telecommunications protocol that supports networks of 327x CRTs on IBM mainframes.

3274 Terminal control unit used on the ACS for processor-to-LMU communications.

3480 IBM's 18-track half-inch cartridge tape drive model.

3490 IBM's 36-track half-inch cartridge tape drive model.

3590 IBM's newest cartridge tape drive model that supports 128-track recording technique.

4400 Automated Cartridge System (ACS) A fully automated, cartridge-based, 18-track storage and retrieval library. A 4400 ACS consists of 1 to 256 LMUs with each LMU connected to from 1 to 24 LSMs.

4410 The standard Library Storage Module (LSM).

4411 Library Control Unit (LCU).

4480 The StorageTek 18-track 1/2-inch cartridge transport.

4480 Cartridge Subsystem The StorageTek 4480 Cartridge Subsystem consists of a control unit (CU) plus cartridge drives (CDs).

4490 The StorageTek 36-track long-tape cartridge transport with ESCON support. Also known as Silverton.

4780 Same as a 4480, but is used for attachment to certain non-IBM computers.

8380 The StorageTek DASD system.

9310 The PowderHorn, a high-performance version of the standard LSM (4410)

9360 The WolfCreek, a high-performance LSM with a smaller capacity than the standard LSM (4410).

9490 The StorageTek 36-track cartridge transport. Also known as TimberLine.

9490EE The StorageTek 36-track cartridge transport. Also known as TimberLine EE.

9740 A small, four-sided StorageTek library that supports large-style cartridge transports. This library can be configured to contain either 326 cartridges or 494 cartridges.

SL8500 See StreamLine (SL8500).

T9840A The StorageTek access-centric cartridge transport capable of reading and writing 9840A cartridges.

T9840B The StorageTek access-centric cartridge transport capable of reading and writing T9840B cartridges.

T9840C The StorageTek access-centric cartridge transport capable of reading and writing T9840C cartridges.

T9940A The StorageTek capacity-centric cartridge transport capable of reading and writing 60GB T9940A cartridges.

T9940B The StorageTek capacity-centric cartridge transport capable of reading and writing 200GB T9940B cartridges.

T10000 The StorageTek high-capacity cartridge transport capable of reading and writing 500GB T10000 cartridges.

T10000B The StorageTek high-capacity cartridge transport capable of reading and writing 240GB or 1TB T10000 cartridges.

Index

A

abend reason codes, 171
Activate Standby operator command, 71
administration
 adding drives, 100
 overview, 99
 removing drives, 102
APPC/MVS support, 19
AUTHCLS keyword parameter, LSINIT, 50

C

Cancel operator command, 72
cartridge tape drives
 access security, 21
 adding, 100
 removing, 102
changed messages, 183
client/server environments
 heterogeneous, 10
 sysplex, 11
 sysplex w/support for non-MVS/CSC clients, 12
CLIENTID LSDEF statement, 59
client-level volume authorization, 27
Clrlock operator command, 73
CMDACC keyword parameter, LSINIT, 50
command access security, 31
commands
 Activate Standby, 71
 Cancel, 72
 Clrlock, 73
 Display Cmd, 75
 Display Drive, 76
 Display Request, 79
 Display Status, 81
 Idle, 82
 Init, 84
 messages, 70
 overview, 67
 relationship to HSC commands, 68
 Set, 86
 Start, 88

Stop, 89
summary, 69
Trace, 91
Vary Drive, 96

COMMONSP keyword parameter, LSINIT, 49
COMMTYPE keyword parameter, LSINIT, 50
communication facilities
 APPC/MVS support, 19
 configuring, 16
 LU6.2 support, 17
 ONC/RPC support, 16
 VTAM support, 18
 XCF support, 20
compatibility, LibraryStation and MVS/CSC, 186
configuration
 allocating the Persistent Data File, 35
 client/server environments, 10
 communication facilities, 16
 drive device numbers, 39
 hardware requirements, 15
 HSC LIBGEN, 64
 HSC started task procedure, 62
 LibraryStation Hostid, 37
 LSDEF data set, 58
 LSINIT control statement, 44
 security measures, 21
 software requirements, 14
 system redundancy, 13, 56
 typical configurations, 6
 verifying LibraryStation, 65
contacting Oracle StorageTek Support, xiv
conventions
 control statements, xix
 typographic, xv
CREQLOG keyword parameter, LSINIT, 51
cross host recovery, 115
customer-initiated maintenance (CIM), xiv

D

database manager, 35
default scratch subpool, 49

- defer initialization at startup, 54
- DEFER keyword parameter, LSINIT, 51
- deleted messages, 183
- description of LibraryStation, 1
- device numbers, configuring, 39
- diagnostic tools, 104
- Display Cmd operator command, 75
- Display Drive operator command, 76
- Display Request operator command, 79
- Display Status operator command, 81
- domain name resolution, 16
- drives
 - access security, 21
 - adding, 100
 - removing, 102
- dynamic server switching, 115

E

- environments, client/server
 - heterogeneous, 10
 - sysplex, 11
 - sysplex w/support for non-MVS/CSC clients, 12
- Errno values, 171
- errors, recovery, 111
- event logging, 104

F

- failure recovery, 111
- flow of requests and responses, 3

H

- hardware components, 6
- hardware requirements, 15
- help
 - online, 70
- heterogeneous environment, 10
- Host Software Component (HSC)
 - interaction with LibraryStation, 2
 - LIBGEN, 21, 64
 - request processing, 3
 - started task procedure, 62
- hostid
 - configuring, 37
 - LibraryStation, 48
 - MVS, 51
- HOSTID keyword parameter, LSINIT, 51

I

- Idle operator command, 82
- Init operator command, 84
- initializing LibraryStation, 117
- installation, LibraryStation, 5, 67, 175

K

- keyword parameters, LSINIT
 - AUTHCLS, 50
 - CMDACC, 50
 - COMMONSP, 49
 - COMMTYPE, 50
 - CREQLOG, 51
 - DEFER, 51
 - HOSTID, 51
 - LSDEF, 51
 - NETHOST, 48
 - NOPDF, 49
 - PDF, 52
 - PDFX, 52
 - POOLCHK, 52
 - REQTIME, 52
 - RETCOUNT, 52
 - RETTIME, 52
 - SYMDESTN, 53
 - TCPNAME, 53
 - TCPPORT, 53
 - VOLACC, 54
 - VOLAUTH, 54
 - VOLNOPRF, 54
 - VSECLOG, 54
 - XCFGROUP, 54
 - XCFMEMBR, 54
 - XHREC, 55
- keywords, SLGDIAG utility, 109

L

- LIBGEN, Host Software Component, 21, 64
- LibraryStation
 - administration, 99
 - client/server environments, 10
 - command summary, 69
 - compatibility with MVS/CSC, 186
 - default scratch subpool, 49
 - description, 1
 - failure recovery, 111
 - hardware requirements, 15
 - hostid, 48
 - how it works, 2
 - installation, 5, 67, 175
 - LSDEF data set, 61
 - messages, 70
 - operating states, 70
 - request processing, 3
 - software and hardware components, 6
 - software requirements, 14
 - starting, 117
 - stopping, 118
- license key, obtaining, 185, 187
- logging, 104
- LSDEF data set
 - allocating, 61

- configuring, 58
- LSDEF file statements
 - CLIENTID, 59
 - SPNUM, 60
- LSDEF keyword parameter, LSINIT, 51
- LSINIT control statement
 - AUTHCLS keyword parameter, 50
 - CMDACC keyword parameter, 50
 - COMMONSP keyword parameter, 49
 - COMMTYPE keyword parameter, 50
 - configuring, 44
 - CREQLOG keyword parameter, 51
 - DEFER keyword parameter, 51
 - format, 44
 - HOSTID keyword parameter, 51
 - keyword parameters, 45
 - LSDEF keyword parameter, 51
 - NETHOST keyword parameter, 48
 - NOPDF keyword parameter, 49
 - PDF keyword parameter, 52
 - PDFX keyword parameter, 52
 - POOLCHK keyword parameter, 52
 - REQTIME keyword parameter, 52
 - RETCOUNT keyword parameter, 52
 - RETTIME keyword parameter, 52
 - SYMDESTN keyword parameter, 53
 - TCPNAME keyword parameter, 53
 - TCPPORT keyword parameter, 53
 - VOLACC keyword parameter, 54
 - VOLAUTH keyword parameter, 54
 - VOLNOPRF keyword parameter, 54
 - VSECLOG keyword parameter, 54
 - XCFGROUP keyword parameter, 54
 - XCFMEMBR keyword parameter, 54
 - XHREC keyword parameter, 55
- LSINIT control statement, modifying, 103
- LU6.2 support, 17

M

- messages, 70
 - abend reason codes, 171
 - changed messages, 183
 - deleted messages, 183
 - descriptions, 120
 - format, 120
 - listing, 122
 - new messages, 183
 - RPC messages, 174
 - system return codes, 171
 - variable definitions, 121
- multiple host configuration, 13

N

- NCS
 - license key, 185, 187
- NETHOST keyword parameter, LSINIT, 48

- network diagnostic tools, 111
- network-level volume authorization checks, 23
- new messages, 183
- NOPDF keyword parameter, LSINIT, 49

O

- ONC/RPC support, 16
- online help, 70
- operating states, 70
- overview, LibraryStation commands, 67

P

- PDF keyword parameter, LSINIT, 52
- PDFX keyword parameter, LSINIT, 52
- Persistent Data File (PDF)
 - allocating, 35
 - description, 35
 - failure recovery, 112
 - rebuilding, 112
- POOLCHK keyword parameter, LSINIT, 52
- pre-installation tasks, NCS, 1

R

- RACROUTE calls, 21
- REQTIME keyword parameter, LSINIT, 52
- request processing, 3
- requirements
 - hardware, 15
 - software, 14
- RETCOUNT keyword parameter, LSINIT, 52
- RETTIME keyword parameter, LSINIT, 52
- return codes, 171
- RPC messages, 174

S

- scratch pool processing, 32
- SCRPOOL control statement, 30
- security measures
 - client volume authority, defining, 54
 - client-level volume authorization, 27
 - command access, 31
 - command volume authority, defining, 50
 - drive access, 21
 - subpools, 30
 - summary, 34
 - volume access, 21
 - volume authority, defining, 54
- security measures, configuring, 21
- Set operator command, 86
- SL8500 (StreamLine) library, 199
- SLGDIAG utility, 65
 - keywords, 109
 - using, 106

- software components, 6
- software requirements, 14
- Sperrno values, 174
- SPNUM LSDEF statement, 60
- Start operator command, 88
- started task procedure, HSC, 62
- starting LibraryStation, 117
- Stop operator command, 89
- stopping LibraryStation, 118
- subpool security implications, 30
- subpool, default scratch, volume security, 32
- SYMDESTN keyword parameter, LSINIT, 53
- SYSLOG entries, 104
- sysplex environment, 11
- sysplex w/support for non-MVS/CSC clients, 12
- System Authorization Facility (SAF), 21, 23, 27, 31
- system redundancy, 13, 56
- system return codes, 171

T

- T9940A Cartridge Subsystem, defined, 203
- tape cartridge drives
 - access security, 21
 - adding, 100
 - changing device numbers, 102
 - removing, 102
- tape format, 187
- TCPIP_PREFIX High Level Qualifier, 17
- TCPNAME keyword parameter, LSINIT, 53
- TCPPORT keyword parameter, LSINIT, 53
- tools, network diagnostic, 111
- Trace operator command, 91
- tracing, 105

V

- variable definitions, 121
- Vary Drive operator command, 96
- verification, configuration, 65
- VOLACC keyword parameter, LSINIT, 54
- VOLAUTH keyword parameter, LSINIT, 54
- VOLNOPRF keyword parameter, LSINIT, 54
- volume access security, 21
- VSECLOG keyword parameter, LSINIT, 54
- VTAM support, 18

X

- XCF support, 20
- XCFGROUP keyword parameter, LSINIT, 54
- XCFMEMBR keyword parameter, LSINIT, 54
- XHREC keyword parameter, LSINIT, 55