

**Oracle® Communications
LSMS**

Upgrade/Installation Guide

Release 13.0

E54200-01, Revision A

May 2014

ORACLE®

Upgrade/Installation Guide

Oracle Communications LSMS Upgrade/Installation Guide, Release 13.0

Copyright © 1997, 2014, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation shall be subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License (December 2007). Oracle America, Inc., 500 Oracle Parkway, Redwood City, CA 94065.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

Contact Oracle's Tekelec Customer Care Center and inform them of your upgrade plans prior to beginning this or any upgrade procedure.

Phone: 1-888-367-8552 or 919-460-2150 (international)
FAX: 919-460-2126

TABLE OF CONTENTS

1. INTRODUCTION.....	1
1.1 Purpose and Scope.....	1
1.2 References.....	1
1.2.1 External	1
1.2.2 Internal (Oracle)	1
1.3 Software Release Numbering.....	1
1.4 Acronyms	1
1.5 Terminology.....	2
1.6 Recommendations.....	3
1.7 Requirements.....	3
2. GENERAL DESCRIPTION	4
3. INSTALLATION/UPGRADE OVERVIEW	5
3.1 Required Materials	5
3.2 Installation Phases	5
3.3 Incremental Upgrade Phases	7
3.4 Backout Phases	8
3.5 Log Files.....	9
3.6 Query Server Upgrade	9
3.7 Migration to Java 1.7	9
3.8 NAS Installation.....	9
4. PREPARATION.....	10
4.1 Hardware Preparation	10
4.1.1 Spare Equipment Inventory	10
4.2 Software Preparation.....	10
4.2.1 Pre-Installation/Upgrade Requirement Check	10
4.2.2 Pre-Upgrade Health Check.....	12
4.2.3 Pre-Upgrade LSMS Node Status.....	15
5. SOFTWARE INSTALLATION PROCEDURE	18
5.1 Upgrade/Installation Determination and Readiness Assessment.....	19
5.2 Set Server Hostname, Designation, and Time	20
5.3 Install the Application.....	24
5.4 Upgrading the Application.....	30
5.6 TMN Toolkit License Installation	37
5.7 Post-Initial Application Processing.....	38
5.8 Post-Upgrade Health Check	39
5.9 Turbo Bulk Download Feature Activation.....	43
6. RECOVERY PROCEDURES	44
6.1 Backout Setup	44
6.2 Perform Backout.....	44
6.3 Backout	45
APPENDIX A. GENERIC PROCEDURES.....	48
APPENDIX B. SITE CONFIGURATION	56

APPENDIX D. RESTORE CUSTOMIZED MY.CNF FILE	59
APPENDIX E. PID FILE AND STATE FILE CHECKS.....	60
APPENDIX F. STOPPING AN LSMS BACKUP AND VERIFYING THAT LOGICAL VOLUMES AND MOUNT POINTS ARE REMOVED	61
APPENDIX G. IPM E5-APP-B SERVER WITH TPD 5.5.1.....	67
APPENDIX H. LOCATE PRODUCT DOCUMENTATION ON THE CUSTOMER SUPPORT SITE 78	

List of Figures

Figure 1: Example of a step that indicates the Server on which it needs to be executed.....	2
Figure 2. Example of an instruction that performs a specific command.....	2
Figure 3: Initial Application Installation Path – Example shown	4
Figure 4: Incremental Upgrade Path - LSMS 13.x	4

List of Tables

Table 1. Acronyms.....	1
Table 2. Terminology.....	2
Table 3. Install-Upgrade paths.....	4
Table 4. Installation Phases.....	6
Table 5. Incremental Upgrade Phases.....	7
Table 6. Backout Procedure Overview	8

List of Procedures

Procedure 1: Verifying Pre-Installation Requirements	10
Procedure 2: Pre-Upgrade Health Check	12
Procedure 3: Determine LSMS Node Status.....	15
Procedure 4: Determine if the upgrade or initial application installation is required	19
Procedure 5: Set Server Hostname, Designation and Time	20
Procedure 6: Install the Application.....	24
Procedure 7: Upgrade the Application.....	30
Procedure 8: TMN Toolkit License Installation	37
Procedure 9: Application-Specific Processing for Post-Initial Installation	38
Procedure 10: Post-Upgrade Health Check	39
Procedure 11: Turbo Bulk Download Feature Activation	43
Procedure 12: E5-APP-B Backout Procedure.....	45
Procedure 13: Perform System Health Check.....	48
Procedure 14: ISO Image copy from USB media.....	50
Procedure 15: Validate the Upgrade Media	54
Procedure 16: Single Subnet Configuration.....	56
Procedure 17: Restore Customized my.cnf File.....	59

Upgrade/Installation Guide

Procedure 18: Check for existence and remove the ugwrap_pid file.....	60
Procedure 19: Check for existence and remove the ugwrap_state file	61
Procedure 20: Stopping an LSMS backup in progress.....	61
Procedure 21: IPM with TPD 5.5.1.....	67

1. INTRODUCTION

1.1 Purpose and Scope

This document describes methods utilized and procedures executed to perform the following tasks:

- a. An initial installation of the LSMS 13.0 application software if it is not currently installed on an in-service E5-APP-B system running a release of 32 bit version of TPD 5.5.1.
- b. A software upgrade on an in-service E5-APP-B system running a release equal to 32 bit version of TPD 5.5.1 and LSMS Release 13.X.

Please note that the LSMS 13.0 cannot be upgraded from any older LSMS release. Migration has to be performed for such cases.

The audience for this internal document consists of Oracle customers and the following groups: Software System, Product Verification, Documentation, and Customer Service including Software Operations and NPI. This document provides step-by-step instructions to install or upgrade the LSMS application on an E5-APP-B.

This document does not address requirements relating to the interaction, if any, between EAGLE and MPS upgrades. This document does not address feature activation.

1.2 References

1.2.1 External

None

1.2.2 Internal (Oracle)

The following are references internal to Oracle. They are provided here to capture the source material used to create this document. Internal references are only available to Oracle personnel.

- [1] TEKELEC Acronym Guide, *MS005077, revision 2.35, Tekelec, September 2005.*
- [2] Software Upgrade Procedure Template, *TM005074, Current Version, Tekelec*
- [3] TPD Initial Product Manufacture User's Guide, 909-2130-001, Latest revision, Tekelec
- [4] Upgrade/Installation Guide, PF006143, Latest revision, Tekelec
- [5] *Electronic Software Release for 192 Million Number Project, PD005306.doc, revision 1.4, Tekelec, May 2006.*
- [6] LSMS 13.0 Alarms and Maintenance Guide, E52612-01, Current Version, Oracle.
- [7] LSMS 13.0 Configuration Guide, E52608-01, Current Version, Oracle.
- [8] Query Server Installation and Upgrade Instructions, 909-1968-001, Current Version, Oracle.
- [9] LSMS 13.0 Cable diagram, Current Version, Tekelec.

1.3 Software Release Numbering

Refer to Engineering Release Notes or other appropriate document with the most recent build numbers in order to identify the proper components (software loads, GPLs, etc.) that comprise the product's software release.

1.4 Acronyms

An alphabetized list of acronyms used in the document that are not included in [1]:

Table 1. Acronyms

E5-APP-B	E5 Based Application Card
----------	---------------------------

Upgrade/Installation Guide

GA	General Availability
IPM	Initial Product Manufacture
LA	Limited Availability
NPI	New Product Introduction
SM	Service Module
TPD	Tekelec Platform Distribution
SCP	Secure Copy
SERVVDI	Support ELAP Reload Via Database Image
UTC	Universal Time Coordinated

1.5 Terminology

Multiple servers may be involved with the procedures in this manual. Therefore, most steps in the written procedures begin with the name or type of server to which the step applies. For example:

Each step has a checkbox for every command within the step that the technician should check to keep track of the progress of the procedure.

The title box describes the operations to be performed during that step.

Each command that the technician is to enter is in 9 point Lucida Console font

1 <input type="checkbox"/>	Verify all materials required are present	Materials are listed in Material List (Section 3.1)
-------------------------------	---	---

Figure 1: Example of a step that indicates the Server on which it needs to be executed

Also of note is the shading of the step number box. If a box is shaded completely black, this signifies there is a specific command to be entered. This is shown in Figure 2. If a box is not shaded at all, this signifies a step that needs to be performed but does not require a specific command be entered. This is shown above in Figure 1.

1 <input type="checkbox"/>	E5-APP-B: Log in as the user “root”	[hostname] consolelogin: root password: <i>password</i>
-------------------------------	--	---

Figure 2. Example of an instruction that performs a specific command

Other terminology follows.

Table 2. Terminology

Backout (abort)	The process to take a system back to a Source Release prior to completion of upgrade to Target release. Includes preservation of databases and system configuration.
Incremental upgrade	Open Systems: An upgrade that takes a target system from any given release to another release but not necessarily from the shipping baseline to the target release.

Upgrade/Installation Guide

Non-preserving upgrade	“Upgrade” that does not adhere to the standard goals of software upgrade methodology. The outcome of the execution is that the system is running on the Target Release, however the Source Release database is not preserved.
Rollback	The process to take a system from a Target Release back to a Source Release including preservation of databases and system configuration.
Source release	Software release to upgrade from.
Target release	Software release to upgrade to.
Upgrade media	USB media or ISO image for E5-APP-B.

1.6 Recommendations

This procedure should be followed thoroughly utilizing the steps as written. **When planning to upgrade the server, contact Oracle Customer Care at least 48 hours before the upgrade process has been planned to be initiated.** In the event any unexpected results are returned while executing steps in this procedure halt the activity and contact Oracle Customer Care for assistance.

Please read the following notes on procedures:

1. Any procedure completion times are estimates. Times may vary due to differences in database size, user experience, and user preparation.
2. The shaded area within response steps must be verified in order to successfully complete that step.
3. Output displayed in the procedures’ response steps is presented. Actual output varies depending on system. Output is presented for reference only.
4. Where possible, command response outputs are shown as accurately as possible. However, exceptions may include the following:
 - Information such as *time* and *date*.
 - ANY information marked with “XXXX.” Where appropriate, instructions are provided to determine what output should be expected in place of “XXXX.”
5. After completing each step and **at each point where data is recorded from the screen, the technician performing the upgrade must check each step.** A checkbox has been provided beneath each step number for this purpose.
6. Captured data is required for future support reference if Oracle Technical Services is not present during the upgrade.
7. In procedures that require a command to be executed on a specific LSMS, the command is prefaced with 1A: or 1B:
8. User Interface menu items displayed in this document were correct at the time the document was published but may appear differently at time that this procedure is executed.

1.7 Requirements

- Screen logging is required throughout the procedure. These logs should be made available to Oracle Customer Care in the event their assistance is needed.
- Target-release USB media or ISO image
- The capability to log into a server, such as a PC with Null modem cable for connection to serial port.
- The capability to log into the web GUI, such as a PC with Java and browser like Internet Explorer.

2. GENERAL DESCRIPTION

The LSMS application can be installed and upgraded based on the table below.

Table 3. Install-Upgrade paths

TPD Release for IPM	LSMS Initial Installation Release
5.5.1-75.14.0 or later	13.0
Upgrade Source Release	Upgrade Destination Release
13.0.x	13.0.y

The LSMS upgrade paths are shown in the figures below. The general timeline for all processes to perform a software upgrade, from pre-upgrade backups to a final system health check, is also included below.

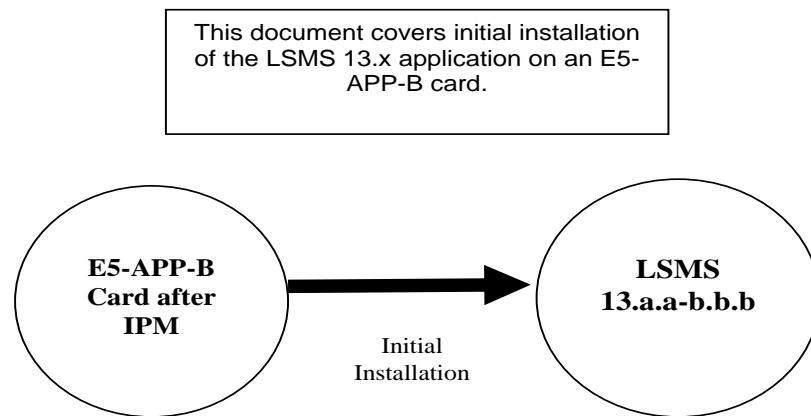


Figure 3: Initial Application Installation Path – Example shown

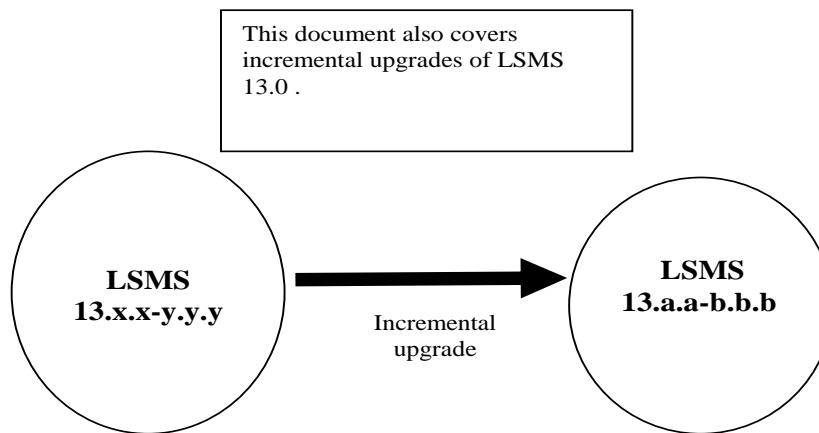


Figure 4: Incremental Upgrade Path - LSMS 13.x

3. INSTALLATION/UPGRADE OVERVIEW

The general installation strategy is to install the IPM on the E5-APP-B server, then install the application.

3.1 Required Materials

- Two (2) target-release USB media or a target-release ISO file.
- A terminal and null modem cable to establish a serial connection.

3.2 Installation Phases

The following table illustrates the progression of the installation process by procedure with estimated times. The estimated times and the phases that must be completed may vary due to differences in typing ability and system configuration. The phases outlined in Table 4 are to be executed in the order they are listed.

Phase	Elapsed Time (Minutes)		Activity	Procedure
	This Step	Cum.		
Pre-install check	15	15	Verify requirements for install are met.	Procedure 1
Connectivity setup	15	30	Set up connectivity to the E5-APP-Bs.	Procedure 1
Verify install	5	35	Verify this should be an install.	Procedure 4
Pre-install health check	5	40	Run the syscheck utility to verify that all servers are operationally sound.	Procedure 13
Configure Server 1A	5	45	Set hostname, designation, and time.	Procedure 5
Configure Server 1B	5	50	Set hostname, designation, and time.	Procedure 5
Install Servers	30	80	Install software.	Procedure 6
Install TMN Toolkit License	5	85	Install TMN Toolkit License	<u>Procedure 8</u>
Post-install application processing	5	85	Perform first time configuration.	Post-Initial Application Processing Note: Before LSMS initial configuration, refer [9] to cable NAS, and refer section 3.8 to install NAS. Procedure 9
Post-upgrade health check	5	90	Run the syscheck utility to verify all servers are operationally sound.	Procedure 10
The following steps only need to be performed on the customer site.				
Site Configuration	15	105	Perform single subnet site specific configuration.	Appendix B
The following steps only need to be performed on the customer system to configure the Turbo Bulk Download setting as of LSMS 8.0 and ELAP 5.0.2 and later.				
NOTE: This procedure can be run by Oracle personnel <u>only</u>				

Upgrade/Installation Guide

Phase	Elapsed Time (Minutes)		Activity	Procedure
	This Step	Cum.		
Turbo Bulk Download	20	135	Enable Turbo Bulk Download.	Procedure 11

Table 4. Installation Phases

3.3 Incremental Upgrade Phases

The following table illustrates the progression of the upgrade process by procedure with estimated times and may vary due to differences in typing ability and system configuration. The phases outlined in Table 5 are to be executed in the order they are listed.

Phase	Elapsed Time (Minutes)		Activity	Procedure
	This Step	Cum.		
Pre-upgrade check	15	15	Verify requirements for upgrade are met.	Procedure 1
Connectivity setup	15	30	Set up connectivity to the E5-APP-B servers.	Procedure 1
Pre-upgrade health check	5	35	Run the syscheck utility to verify the E5-APP-B server is operationally sound.	Procedure 2
Pre-upgrade Node status	5	40	Run the LSMS Node Status to verify that the server's HA states are operationally sound.	Procedure 3
Verify incremental upgrade	5	45	Verify this should be an incremental upgrade.	Procedure 4
Upgrade Servers	30	75	Execute the upgrade procedure on E5-APP-B servers.	Procedure 7
Post-upgrade health check	5	80	Run the syscheck utility to verify the E5-APP-B server is operationally sound.	Procedure 10
The following steps only need to be performed on the customer system to configure the Turbo Bulk Download setting as of LSMS 8.0 and ELAP 5.0.2 and later.				
NOTE: This procedure can be run by Oracle personnel only				
Turbo Bulk Download	20	100	Enable Turbo Bulk Download.	Procedure 11

Table 5. Incremental Upgrade Phases

3.4 Backout Phases

The following table illustrates the progression of the backout process by procedure with estimated times and may vary due to differences in typing ability and system configuration. The phases outlined in Table 6 are to be executed in the order they are listed.

Phase	Elapsed Time (Hours or Minutes)		Activity	Impact	Procedure
	This Step	Cu m.			
Determine state of system	15-30	15-30	Investigate and determine the state of the LSMS system. This may take anywhere from 15 to 30 minutes.	Cannot proceed with backout until failure analysis is complete. Some hand-fixes may be required before proceeding with backout.	Contact the Technical Assistance Center.
Backout Servers	30	45-60	If required, backout E5-APP-B 1A first then 1B.		Procedure 12
Post-backout health check	10	55-70	Run the syscheck utility to verify the E5-APP-B server is operationally sound.	Verify that the backout was successful.	Procedure 10

Table 6. Backout Procedure Overview

3.5 Log Files

All commands executed during an upgrade or installation, are logged in the “/var/TKLC/log/upgrade/upgrade.log” file. This log file is automatically initiated when upgrade software is invoked. This log file is rolled every time an upgrade is initiated. A total of up to five upgrade log files are stored on the server.

The upgrade wrapper script, ugwrap, logs its actions also to the “/var/TKLC/log/upgrade/ugwrap.log” file. This log file is rolled every time ugwrap is initiated. A total of up to five ugwrap log files are stored on the server.

3.6 Query Server Upgrade

An LSMS upgrade to Release 13.0 includes the upgrade of MySQL from Release 5.0.90 to Release 5.6.14. Successful MySQL replication to the LSMS Query Server requires that the MySQL running on the Query Server be at the same or higher version compared to the version running on the LSMS. Therefore, for customers with Query Servers connected to the LSMS, the upgrade of the Query Server for LSMS 13.0 to MySQL 5.6.14 must be completed prior to upgrade of the LSMS to Release 13.0. See Reference [8] for instructions on upgrading the Query Server.

NOTE: Failure to upgrade the LSMS Query Server to MySQL 5.6.14 prior to the upgrade of LSMS to Release 13.x may lead to subsequent replication failures to the Query Server.

3.7 Migration to Java 1.7

NOTE: LSMS Release 13.0 introduces support for Java 1.7. Upon major upgrade to Release 13.0, any client attempting to access the LSMS GUI must install Java 1.7. Clients with Java 1.6 installed will no longer be able to view the LSMS GUI and have full functionality.

NOTE: Additionally, once a client is upgraded to Java 1.7, that client will no longer be capable of accessing systems that still require Java 1.6. In other words, if a client has installed Java 1.7 in order to access the GUI for LSMSs (or ELAPs) that have been upgraded to Java 1.7-supported releases, those clients will no longer have fully functional access to the Java 1.6 supported releases still present on other LSMS/ELAP systems.

3.8 NAS Installation

An LSMS upgrade to Release 13.0 includes the installation of NAS on an E5-APP-B of version 870-3096-002 with 480G disk capacity. The E5-APP-B to be running as NAS will be IPMed as in Appendix G with the 64 bit version of TPD 5.5.1 and configured from the connected LSMS.

4. PREPARATION

4.1 Hardware Preparation

Not Applicable

4.1.1 Spare Equipment Inventory

Not Applicable

4.2 Software Preparation

4.2.1 Pre-Installation/Upgrade Requirement Check

Procedure 1: Verifying Pre-Installation Requirements

S T E P #	<p>This procedure verifies that all pre-installation/Upgrade requirements have been met.</p> <p>NOTE: Call Oracle Technical Services for assistance if modem access is the method use for upgrade.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>IF THIS PROCEDURE FAILS, CONTACT ORACLE TECHNICAL SERVICES AND ASK FOR UPGRADE ASSISTANCE.</p>
1. <input type="checkbox"/>	<p>Verify all materials required are present</p> <p>Required materials:</p> <ul style="list-style-type: none"> * Target-release USB or ISO image if software is being provided electronically. * The capability to log into a server, such as a PC with null modem cable for connection to serial port.
2. <input type="checkbox"/>	<p>Establish a connection to E5-APP-B A.</p> <p>If access to the LSMS servers is not available through an IP network, connect to the E5-APP-B card via the serial port as follows:</p> <p>For connecting the E5-APP-B A card, disconnect the console cable from the serial port on the E5-APP-B B card's adapter. The cable should be disconnected at the point where it connects to the serial port labeled 'S1' on the E5-APP-B B card's adapter and use it for serial access. Cable part numbers - 830-1220-xx</p>
3. <input type="checkbox"/>	<p>On the workstation, open one terminal window in preparation for establishing remote connections to the E5-APP-B servers.</p> <p>Create a terminal window</p>
4. <input type="checkbox"/>	<p>Create a terminal window for E5-APP-B A.</p> <p>Create a terminal window and give it a title of "E5-APP-B A"</p>
5. <input type="checkbox"/>	<p>E5-APP-B A: Enable capture file and verify the correspondent file is created.</p> <p>Enable the data capture and verify that the data capture file is created at the path specified.</p>
6. <input type="checkbox"/>	<p>Log into E5-APP-B A.</p> <p><hostname> console login: root password: <password></p>

Upgrade/Installation Guide

7. <input type="checkbox"/>	E5-APP-B A: Start screen Session.	Execute the following command to start screen and establish a console session with E5-APP-B A. # screen -L
8. <input type="checkbox"/>	Establish a connection to E5-APP-B B.	If access to the LSMS servers is not available through an IP network, connect to the E5-APP-B card via the serial port as follows: For connecting the E5-APP-B B card, disconnect the console cable from the serial port on the E5-APP-B A card's adapter. The cable should be disconnected at the point where it connects to the serial port labeled 'S1' on the E5-APP-B A card's adapter and use it for serial access. Cable part numbers - 830-1220-xx
9. <input type="checkbox"/>	Create a terminal window for E5-APP-B B.	Create a terminal window and give it a title of "E5-APP-B B"
10. <input type="checkbox"/>	E5-APP-B B: Enable capture file and verify a correspondent file is created.	Enable the data capture and verify that the data capture file is created at the path specified.
11. <input type="checkbox"/>	Log into E5-APP-B B.	<hostname> console login: root password: <password>
12. <input type="checkbox"/>	E5-APP-B B: Start screen Session.	Execute the following command to start screen and establish a console session with E5-APP-B B. # screen -L

4.2.2 Pre-Upgrade Health Check

Procedure 2: Pre-Upgrade Health Check

S T E P #	<p>This procedure determines the health of the server before beginning an upgrade. This procedure will perform a syscheck on each LSMS server, verify that MySQL replication is functioning correctly between the two LSMS servers, capture command output to be used later, check for and remove any .ugwrap_pid or .ugwrap_state files on each LSMS server.</p> <p>WARNING: If it is determined that MySQL replication is not healthy between the two LSMS servers, do not proceed with this upgrade and contact the Oracle Customer Care Center for assistance.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>IF THIS PROCEDURE FAILS, CONTACT THE ORACLE CUSTOMER CARE CENTER AND ASK FOR ASSISTANCE.</p>	
1	<input type="checkbox"/> E5-APP-B: Verify the health of each LSMS server via syscheck.	Execute section A.1 on both the 1A and 1B servers to verify the health of the server via syscheck.
2	<input type="checkbox"/> E5-APP-B: Login to either LSMS server as the user “root”.	[hostname] consolelogin: root password: <i>password</i>
3	<input type="checkbox"/> E5-APP-B: Execute the “hastatus” command to verify the HA state of this server.	<p>Execute the following command to verify that you are on the STANDBY server.</p> <pre># hastatus</pre> <p>If the output from the above command is “ACTIVE” then you are on the ACTIVE server and not the STANDBY server. Proceed to the next step of this procedure.</p> <p>If the output from the above command is “STANDBY” than you are on the STANDBY server, please proceed to Step 7 of this procedure.</p>
4	<input type="checkbox"/> E5-APP-B: SSH to the mate server.	<p>Execute the following command to SSH to the mate server in order to verify that it is the STANDBY server.</p> <pre># ssh mate</pre>
5	<input type="checkbox"/> E5-APP-B: Execute the “hastatus” command to verify the HA state of this server.	<p>Execute the following command to verify that you are on the STANDBY server.</p> <pre># hastatus</pre> <p>If the output from the above command is “STANDBY” than you are on the STANDBY server, please proceed to the next step of this procedure.</p> <p>WARNING: If the output from the above command is anything else other than “STANDBY” do not proceed with this upgrade and contact the Oracle Customer Care Center for assistance.</p>
6	<input type="checkbox"/> E5-APP-B: Login as the user “root” on the STANDBY server.	[hostname] consolelogin: root password: <i>password</i>
7	E5-APP-B: Verify	Execute the following command to verify that MySQL replication is working correctly

Upgrade/Installation Guide

Procedure 2: Pre-Upgrade Health Check

	<p><input checked="" type="checkbox"/> that the STANDBY server's MySQL replication is functioning properly</p>	<p>on the STANDBY LSMS server:</p> <pre># tail /var/TKLC/lsms/logs/dbrep1Mon.log</pre> <p>If MySQL replication is functioning correctly then the following output will be observed, make sure that at least the last line of your output matches the lines below.</p> <pre>Tue Nov 13 15:15:35 2007 All tests passed on STANDBY Tue Nov 13 15:16:38 2007 All tests passed on STANDBY Tue Nov 13 15:17:41 2007 All tests passed on STANDBY Tue Nov 13 15:18:45 2007 All tests passed on STANDBY Tue Nov 13 15:19:48 2007 All tests passed on STANDBY Tue Nov 13 15:20:52 2007 All tests passed on STANDBY Tue Nov 13 15:21:55 2007 All tests passed on STANDBY Tue Nov 13 15:22:59 2007 All tests passed on STANDBY Tue Nov 13 15:24:03 2007 All tests passed on STANDBY Tue Nov 13 15:25:08 2007 All tests passed on STANDBY</pre> <p>WARNING: If at least the last line of your output does not match the lines above then do not proceed with this upgrade and contact the Oracle Customer Care Center for assistance.</p>
8	<p><input checked="" type="checkbox"/> E5-APP-B: Login as the user "lsmsadm" on the ACTIVE server.</p>	<p>[hostname] consolelogin: lsmsadm password: password</p>
9	<p><input checked="" type="checkbox"/> E5-APP-B: Capture the output of the "lsmsdb -c counts" command.</p>	<p>Execute the following command on the ACTIVE LSMS server to display the current LSMS database counts:</p> <pre>\$ lsmsdb -c counts</pre> <p>NOTE: Capture the output from this command and make it available to the Oracle Customer Care Center if required.</p>
10	<p><input checked="" type="checkbox"/> E5-APP-B: Capture the output of the "lsmsdb -c features" command.</p>	<p>Execute the following command on the ACTIVE LSMS server to display the current LSMS feature configuration:</p> <pre>\$ lsmsdb -c features</pre> <p>NOTE: Capture the output from this command and make it available to the Oracle Customer Care Center if required.</p>
11	<p><input checked="" type="checkbox"/> E5-APP-B: Capture the output of the "sentry status" command.</p>	<p>Execute the following command on the ACTIVE LSMS server to display the current LSMS sentry status:</p>

Procedure 2: Pre-Upgrade Health Check

		\$ <code>sentry status</code>
		NOTE: Verify that the output displays a Status of “running” for all processes; the regional processes (npacagents) may or may not be associated in the Comment field. If the output from this command displays any other Status than “running” contact the Oracle Customer Care Center and ask for assistance before proceeding with this upgrade. Capture the output from this command and make it available to the Oracle Customer Care Center if required.
12 <input checked="" type="checkbox"/>	E5-APP-B: Capture the output of the “eagle status” command.	Execute the following command on the ACTIVE LSMS to display the current LSMS eagle status: \$ <code>eagle status</code> NOTE: Capture the output from this command for comparison to the output captured during the Procedure 10: Post-Upgrade Health Check as well as make it available to the Oracle Customer Care Center if required.
13 <input type="checkbox"/>	E5-APP-B: Verify that an LSMS backup is not running on either LSMS server.	Execute Procedure 20: Stopping an LSMS backup in progress on both the 1A and 1B servers to verify that no LSMS backups are running and the backup logical volume is not mounted and does not exist.
14 <input type="checkbox"/>	E5-APP-B: Check for the existence of the .ugwrap_pid file	Execute section E.1 on both the 1A and 1B servers to check for the existence and remove the .ugwrap_pid file.
15 <input type="checkbox"/>	E5-APP-B: Check for the existence of the .ugwrap_state file	Execute section E.2 on both the 1A and 1B servers to check for the existence and remove the .ugwrap_state file.

Procedure 2: Pre-Upgrade Health Check

16	E5-APP-B: Check MySQL version if connected with a Query Server	<p>Excute the following command on the the ACTIVE LSMS to determine if a QS is connected:</p> <p>§ <code>1smsdb -c queryservers</code></p> <ul style="list-style-type: none"> • If there is QS connected, output similar to the following displays: Queryserv1 (10.25.60.32) Connected <p>On QS Solaris server: Determine whether the Oracle-provided MySQL version is installed on supported release: Enter the following command. <code># /opt/TKLCplat/mysql/bin/mysql -V</code> The output should display the running MySQL version is 5.6.14. If the version is other than 5.6.14, contact the Oracle Customer Care Center (1-800-432-8919) and ask for assistance.</p> <p>See Section 3.6 QS Upgrade for additional details.</p> <ul style="list-style-type: none"> • If there is no QS connected, NO output will display.
17	E5-APP-B: The Pre-Upgrade Health Check is complete.	<p>This procedure is complete . Return to the Table in Section 3 that directed you to this procedure.</p>

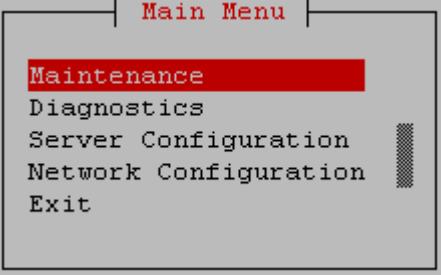
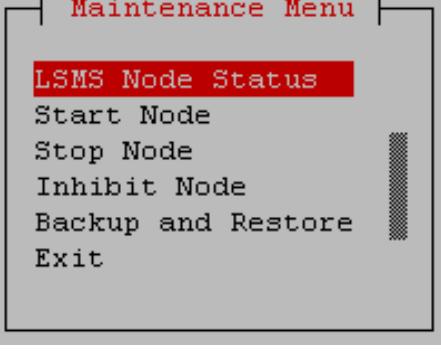
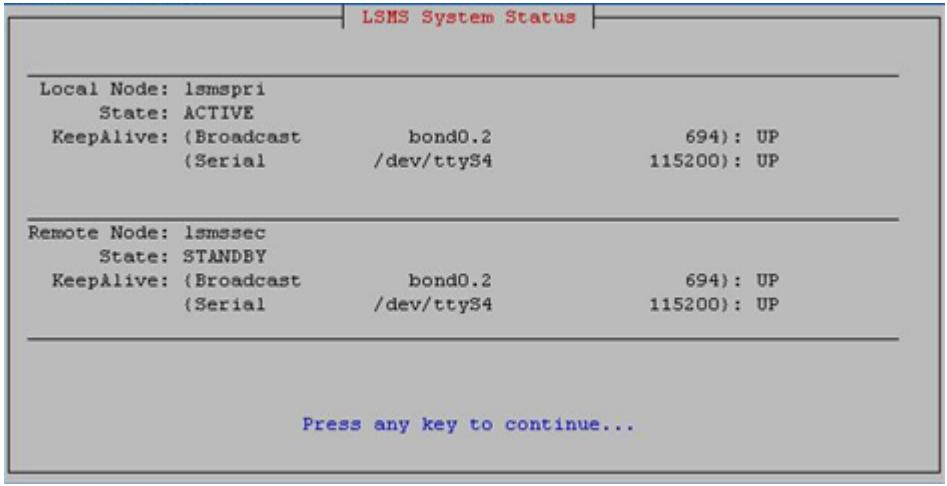
4.2.3 Pre-Upgrade LSMS Node Status

Procedure 3: Determine LSMS Node Status

S T E P #	<p>This procedure performs a Node Status on any E5-APP-B running the LSMS application.</p> <p>NOTE: This procedure verifies that the 1A server is in the ACTIVE state and the 1B server is in the STANDBY state prior to beginning the upgrade. If it is determined that the servers are not in the previously described states, please contact the Oracle Customer Care Center (1-800-432-8919) and ask for assistance in performing a system failover.</p> <p>WARNING: If a system failover is to be performed then it <u>must</u> be verified that replication between the ACTIVE and STANDBY servers is functioning correctly before attempting the failover.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>IF THIS PROCEDURE FAILS, CONTACT THE ORACLE CUSTOMER CARE CENTER AND ASK FOR ASSISTANCE.</p>	
1	Execute the LSMS Node Status on the 1A LSMS server.	Execute all commands in this procedure in the window for the 1A LSMS server.
2	Start the lsmsmgr utility by logging in as the lsmsmgr user.	[hostname] consolelogin: lsmsmgr Password: password

Upgrade/Installation Guide

Procedure 3: Determine LSMS Node Status

<input type="checkbox"/> 3	Make selections on the Main Menu of the Platform Configuration Utility.	On the Main Menu , select the Maintenance submenu, and press [ENTER]. Select LSMS Node Status , and press [ENTER].  
<input type="checkbox"/> 4	Examine the output of the LSMS Node Status and verify that the states of the Server 1A and 1B LSMS servers are “ACTIVE” and “STANDBY” respectively.	The LSMS System Status results appear on the screen, the “State:” information must match exactly with the following example. The following screen shot is an example of acceptable states for continuing an upgrade:  The following are examples of unacceptable states for continuing an upgrade: ACTIVE “lsmssec->TO_STANDBY” STANDBY “lsmssec->TO_STANDBY”

Upgrade/Installation Guide

Procedure 3: Determine LSMS Node Status

5	LSMS System Status Successful	If the LSMS System Status was successful and in Procedure 4 this upgrade was determined to be an incremental upgrade, return to Table 5.
	LSMS System Status Failure	If LSMS System Status detected any failures, please contact the Oracle Customer Care Center (1-800-432-8919) and ask for assistance.

5. SOFTWARE INSTALLATION PROCEDURE

Please read the following notes on procedures:

1. The complete procedure should be performed on all machines in a system.
2. All procedure completion times are estimates. Times may vary due to differences in database size, user experience, and user preparation.
3. Output displayed in the procedures response steps is presented. Actual output varies depending on the system.
4. Where possible, command response outputs are shown as accurately as possible. However, exceptions may include the following:
 - * Information such as *time* and *date*.
 - * ANY information marked with “XXXX.” Where appropriate, instructions are provided to determine what output should be expected in place of “XXXX.”
5. After completing each step and **at each point where data is recorded from the screen, the technician performing the procedure must check each step.** A checkbox has been provided beneath each step number for this purpose.
6. Captured data is required for future support reference if the Oracle Customer Care Center is not present.
7. User Interface menu items displayed in document were correct at the time the document was published but may appear differently at this time.

5.1 Upgrade/Installation Determination and Readiness Assessment

Procedure 4: Determine if the upgrade or initial application installation is required

S T E P #	<p>This procedure provides instructions to determine if this will be an initial installation or an upgrade of existing software.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>IF THIS PROCEDURE FAILS, CONTACT THE ORACLE CUSTOMER CARE CENTER AND ASK FOR ASSISTANCE.</p>	
1	E5-APP-B: Log in as the user “root” <input type="checkbox"/>	[hostname] consolelogin: root password: <i>password</i>
2	E5-APP-B: Determine if the application is correctly installed on the server. (E5-APP-B will be used to determine the current state of the servers. We will assume the state of the A server is the same.)	Execute an rpm query command and examine the output: # rpm -qi TKLClsms
3	E5-APP-B: Observe the output from the rpm query.	The following is an example of what the output may look like: <pre>[root@lsmspri ~]# rpm -qi TKLClsms Name : TKLClsms Relocations: (not relocatable) Version : 13.3.0 Vendor: Oracle Release : 0.46456 Build Date: Thu 16 Jan 2014 09:29:26 AM EST Install Date: Thu 16 Jan 2014 07:30:52 PM EST Build Host: merc- 1.labs.nc.tekelec.com Group : TKLC/Application Source RPM: TKLClsms-13.3.0- 0.46456.src.rpm Size : 282594111 License: © 2004, 2014, Oracle and/or its affiliates. All rights reserved. Signature : (none) Packager : <@oracle.com> URL : http://www.oracle.com/ Summary : Oracle Communications LSMS Package Description : This is the Oracle Communications LSMS Package. The package installs LSMS software. Local Service Management System (LSMS) is a secure and reliable Local Number Portability (LNP) system.</pre>
4	E5-APP-B: Determine the LSMS release currently installed.	Execute the following command and examine the output # cat /usr/TKLC/lsms/bin/LSMSversion; ssh mate "cat /usr/TKLC/lsms/bin/LSMSversion"

Upgrade/Installation Guide

Procedure 4: Determine if the upgrade or initial application installation is required

5	E5-APP-B: Observe the output.	The following is an example of what the output may look like: [root@lsmspri root]# cat /usr/TKLC/lsms/bin/LSMSversion; ssh mate "cat /usr/TKLC/lsms/bin/LSMSversion" 13.0.0_130.1.0 Tekelec build 2014-01-13-10-59 13.0.0_130.1.0 Tekelec build 2014-01-13-10-59
6	E5-APP-B: Logout	# logout
7	E5-APP-B: Initiate an installation if the application is not present on the server	If the application is not currently installed, output similar to the examples below will be returned from the rpm -qi command in the previous step. If this is the case, then an application installation is required. Proceed to Table 4 for an install. [root@lsmspri root]# rpm -qi TKLClsms package TKLClsms is not installed
8	E5-APP-B: Determine which version of the application is present and verify if an incremental upgrade	If the application is currently installed, get the Release number from step 5. If the release number on the E5-APP-B is less than the release number on the upgrade media and both release numbers are LSMS 13.0, then an incremental upgrade is required.
9	E5-APP-B: If this is an incremental upgrade, write down the release level before the upgrade	Write down the release level now if this is an incremental upgrade. Release Level: _____ Proceed to the next step in Table 5. Incremental Upgrade Phases.

5.2 Set Server Hostname, Designation, and Time

Procedure 5: Set Server Hostname, Designation and Time

S	This procedure provides instructions to perform an initial install of the application.	
T	Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.	
E	IF THIS PROCEDURE FAILS, CONTACT THE ORACLE CUSTOMER CARE CENTER AND ASK FOR ASSISTANCE.	
P	E5-APP-B: Start platcfg utility by logging in as platcfg user	[hostname] consolelogin: platcfg password: password
#		
1		

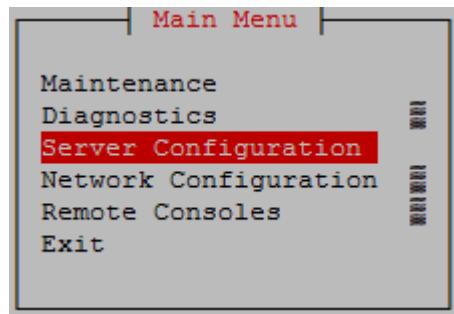
Procedure 5: Set Server Hostname, Designation and Time

2

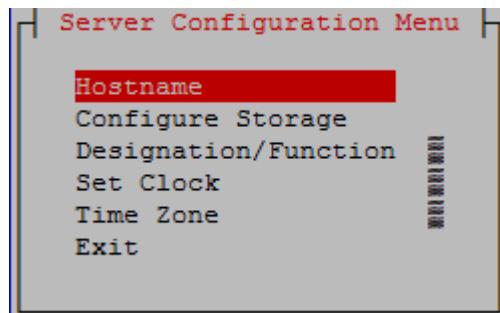
E5-APP-B:

Navigate to the Hostname screen.

Select **Server Configuration** and press **[ENTER]**

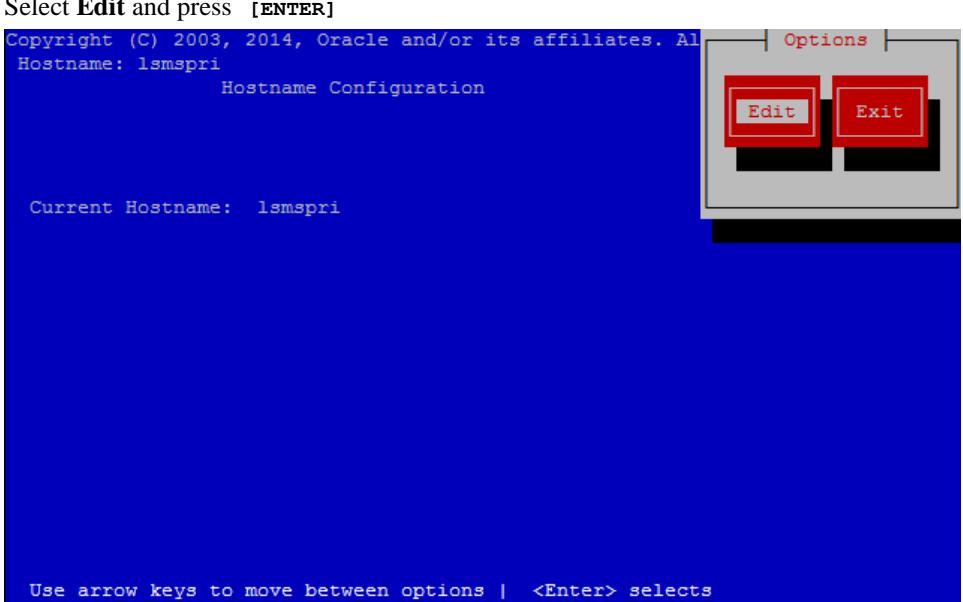
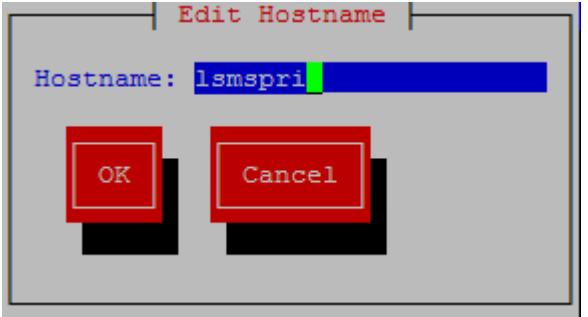
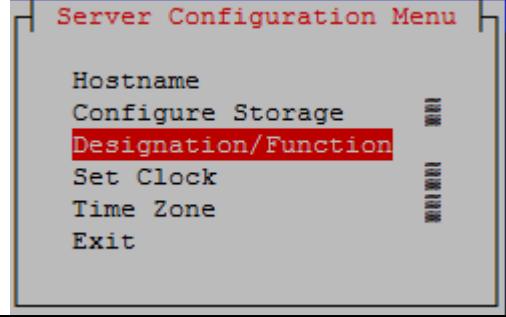


Select **Hostname** and press **[ENTER]**



Upgrade/Installation Guide

Procedure 5: Set Server Hostname, Designation and Time

<p>3</p>	<p>4</p> <p>E5-APP-B: Change the host name.</p>	<p>Select Edit and press [ENTER]</p> <p>Copyright (C) 2003, 2014, Oracle and/or its affiliates. All rights reserved.</p> <p>Hostname: lsmspri</p> <p>Hostname Configuration</p> <p>Current Hostname: lsmspri</p> <p>Options Edit Exit</p> <p>Use arrow keys to move between options <Enter> selects</p> <p>Type in the host name. For example change hostname to lsmspri on A server and lsmssec on B server.</p>   <p>Select OK and press [ENTER].</p>
<p>5</p>	<p>E5-APP-B: Navigate to the Designation Information screen.</p>	<p>Select Designation/Function and press [ENTER]</p> 

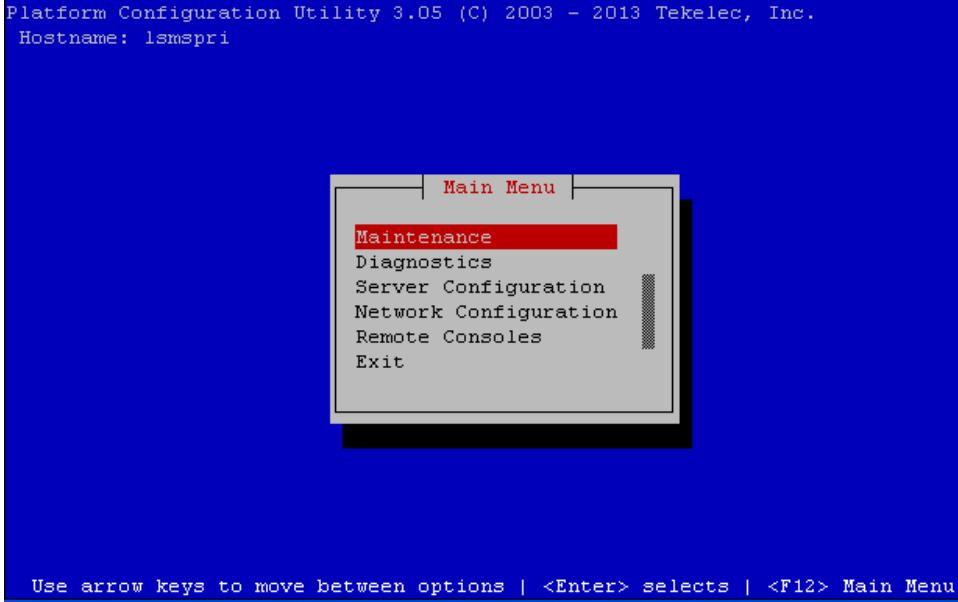
Upgrade/Installation Guide

Procedure 5: Set Server Hostname, Designation and Time

6	E5-APP-B: View the current designation and function.	<p>The screen will show the current designation and function setting. On initial install, these fields are blank.</p> <p>If not blank the values should be as follows.</p> <ul style="list-style-type: none"> - The designation is “1A” for the A server - The designation is “1B” for the B server - The Function field should be set to “LSMS” <p>If either value is not correct, then select Edit and press [ENTER].</p> <p>If both values are correct, select Exit, press [ENTER] and skip the next step.</p>
7	E5-APP-B: Change the current designation and function.	<p>In the text entry box, delete the current designation and function and type in the desired values. Enter the appropriate designation in the Designation field (Note: the designation must be capitalized).</p> <p>Select OK and press [ENTER].</p> <p>Go back to step 3.</p>
8	E5-APP-B: Set time zone.	<p>Select Time Zone and press [ENTER].</p> <p>Select Edit and press [ENTER].</p> <p>Select appropriate time zone.</p> <p>Use right arrow to get to OK and press [ENTER].</p> <p>Select Exit and press [ENTER].</p>
9	E5-APP-B: Set clock.	<p>Select Set Clock and press [ENTER].</p> <p>Select Edit and press [ENTER].</p> <p>Enter correct time.</p> <p>Use right arrow to get to OK and press [ENTER].</p> <p>Select Exit and press [ENTER].</p>
10	E5-APP-B: Logout.	<p>Select Exit and press [ENTER] to return to the Main Menu.</p> <p>Select Exit and press [ENTER]. The “platcfg” utility terminates.</p>

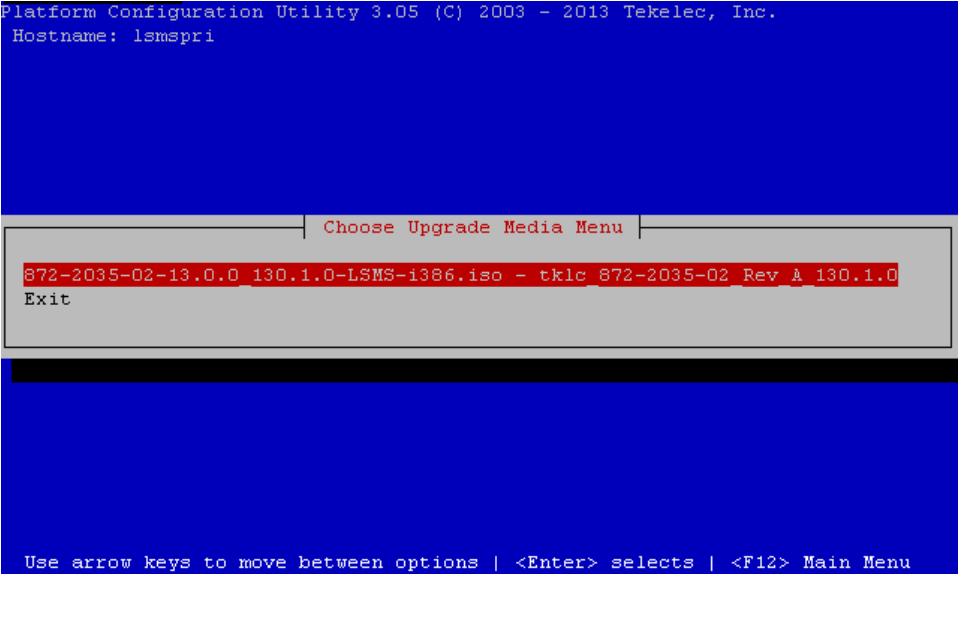
5.3 Install the Application

Procedure 6: Install the Application

S	This procedure installs the application on the server.	
T	Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.	
E	IF THIS PROCEDURE FAILS, CONTACT THE ORACLE CUSTOMER CARE CENTER AND ASK FOR ASSISTANCE.	
P		
#		
1	E5-APP-B: Install 1A LSMS server	Perform Procedure in 6.3A.2A.2 or copy LSMS 13.0 ISO to /var/TKLC/upgrade directory.
2	E5-APP-B: Start platcfg utility by logging in as platcfg user	[hostname] consolelogin: platcfg password: <i>password</i>
3	E5-APP-B: Select the Maintenance submenu	The platcfg Main Menu appears. On the Main Menu , select Maintenance and press [ENTER]. 
4	E5-APP-B: Navigate to the Initiate Upgrade menu.	Select the Upgrade menu and press [ENTER]. Select the Initiate Upgrade menu and press [ENTER].

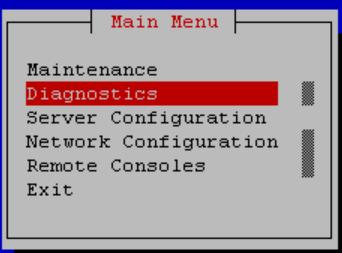
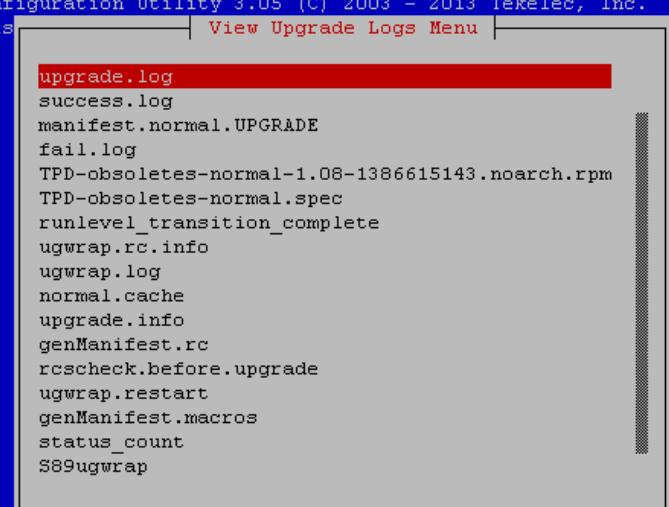
Upgrade/Installation Guide

Procedure 6: Install the Application

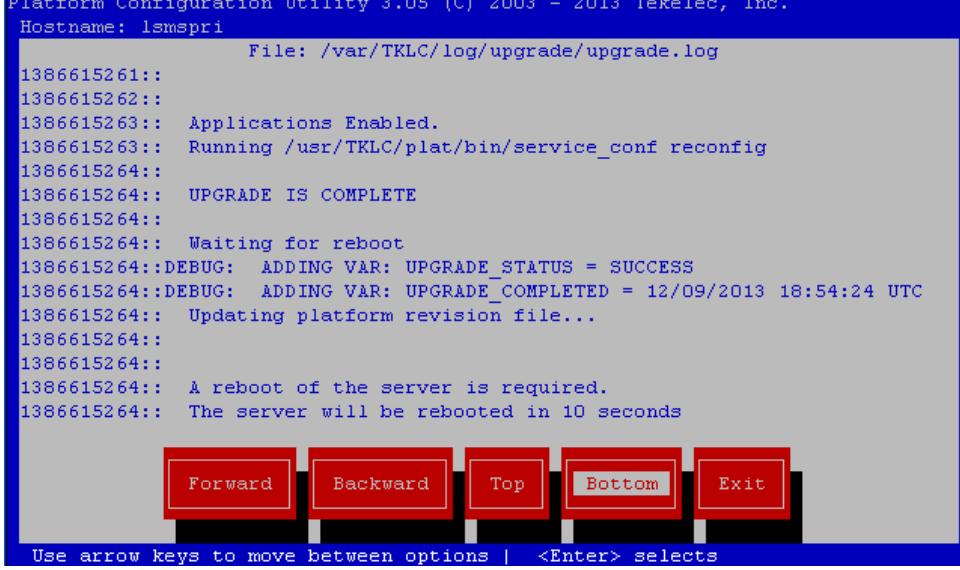
5	E5-APP-B: Select the Upgrade Media	<p>The screen displays a message that it is searching for upgrade media. When the upgrade media is found, an Upgrade Media selection menu appears similar to the example below. Select the desired upgrade media and press [ENTER]. There should only be one selection available, as in the example below.</p>  <pre>Platform Configuration Utility 3.05 (C) 2003 - 2013 Tekelec, Inc. Hostname: lsmspri Choose Upgrade Media Menu 872-2035-02-13.0.0_130.1.0-LSMS-i386.iso - tklc 872-2035-02 Rev A 130.1.0 Exit Use arrow keys to move between options <Enter> selects <F12> Main Menu</pre>
6	E5-APP-B: Upgrade proceeds	<p>The screen displays the following, indicating that the upgrade software is first validating the media, and then proceeding with the upgrade.</p> <pre>Initializing Upgrade Wrapper ... Validating packages ...</pre>
7	E5-APP-B: Upgrade proceeds	<p>Many informational messages appear on the terminal screen as the upgrade proceeds. The messages are not shown here for clarity sake. When installation is complete, the server reboots.</p>
8	E5-APP-B: Upgrade completed	<p>After the final reboot, the screen displays the login prompt as in the example below.</p> <pre>Starting tpdProv: [OK] Starting ntdMgr: [OK] Verifying disk configuration for S.M.A.R.T.: [OK] [OK] atd: [OK] Starting TKLCe5appb: [OK] Checking network config files: [OK] Starting LSMS DB Replication Monitor: [OK] Starting smartd: [OK] completeTasks started: Mon Dec 9 13:57:18 2013 LOG FILE: /var/TKLC/log/TaskMgr/completeTasks. CentOS release 5.8 (Final) Kernel 2.6.18-308.11.1.el5prerel5.5.0_75.12.0 on an i686 lsmspri login:</pre>

Upgrade/Installation Guide

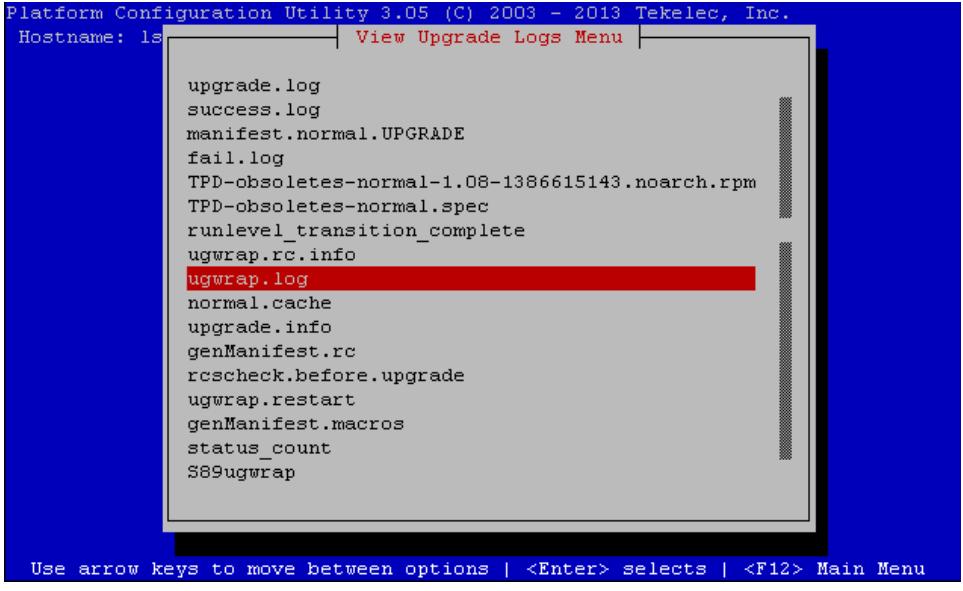
Procedure 6: Install the Application

9	E5-APP-B: Start platcfg utility by logging in as platcfg user	[<i>hostname</i>] consolelogin: <i>platcfg</i> password: <i>password</i>
10	E5-APP-B: Navigate to the Diagnostics Menu	On the platcfg Main Menu , select Diagnostics and press [ENTER].
11	E5-APP-B: Navigate to the View Upgrade Logs Menu	On the Diagnostics menu, select View Upgrade Logs and press [ENTER].  Use arrow keys to move between options <Enter> selects <F12> Main Menu
12	E5-APP-B: Select the most recent upgrade log.	Select upgrade.log (which contains the latest upgrade log) and press [ENTER].  Use arrow keys to move between options <Enter> selects <F12> Main Menu
13	E5-APP-B: View the upgrade log	Examine the upgrade log to determine if any errors/warnings were reported.

Procedure 6: Install the Application

	<p>Contact the Technical Assistance Center following the instructions on the front page.</p> <p>Scroll down to the bottom of the file, and verify that the upgrade is complete. Once verified, exit the log viewer by selecting Exit.</p>  <p>Platform Configuration Utility 3.05 (C) 2003 - 2013 Tekelec, Inc. Hostname: lsmspri File: /var/TKLC/log/upgrade/upgrade.log 1386615261:: 1386615262:: 1386615263:: Applications Enabled. 1386615263:: Running /usr/TKLC/plat/bin/service_conf reconfig 1386615264:: 1386615264:: UPGRADE IS COMPLETE 1386615264:: 1386615264:: Waiting for reboot 1386615264::DEBUG: ADDING VAR: UPGRADE_STATUS = SUCCESS 1386615264::DEBUG: ADDING VAR: UPGRADE_COMPLETED = 12/09/2013 18:54:24 UTC 1386615264:: Updating platform revision file... 1386615264:: 1386615264:: 1386615264:: A reboot of the server is required. 1386615264:: The server will be rebooted in 10 seconds Forward Backward Top Bottom Exit Use arrow keys to move between options <Enter> selects</p> <p>Or execute the following commands from a prompt:</p> <pre># grep "UPGRADE IS COMPLETE" /var/TKLC/log/upgrade/upgrade.log</pre> <p>The expected output is similar to the following:</p> <pre>1389608030:: UPGRADE IS COMPLETE</pre> <pre># grep -i error /var/TKLC/log/upgrade/upgrade.log</pre> <p>The following errors are expected:</p> <pre>ERROR: PIDFILE: /var/run/ntdMgr ERROR: DAEMON PID: 5759 ERROR: Will not start another daemon!</pre> <pre># grep -i warning /var/TKLC/log/upgrade/upgrade.log</pre> <p>The following warning are expected:</p> <pre>1389814828::WARNING: TKLClsms-Config-1.3.0-13.0.0_130.1.0: Current hostname "lsmspri" being reset to default. 1389814829::WARNING: Hostname not changed because it is the same. 1389814836::2014-01-15 14:40:36 0 [Warning] TIMESTAMP with implicit DEFAULT value is deprecated. Please use --explicit_defaults_for_timestamp server option (see documentation for more details). 1389814838::2014-01-15 14:40:38 16032 [Warning] InnoDB: New log files created, LSN=45781 1389814838::2014-01-15 14:40:38 16032 [Warning] InnoDB: Creating foreign key constraint system tables. 1389814841::2014-01-15 14:40:41 0 [Warning] TIMESTAMP with implicit DEFAULT value is deprecated. Please use --explicit_defaults_for_timestamp server option (see documentation for more details).</pre>
--	---

Procedure 6: Install the Application

	<pre> 1389814843::WARNING: Default config file /etc/my.cnf exists on the system 1389814870::ntp warning: /etc/ntp.conf saved as /etc/ntp.conf.rpmsave 1389814870::warning: /etc/sysconfig/ntp created as /etc/sysconfig/ntp.rpmnew 1389814887::WARNING: Could not write to config file /usr/my-new.cnf: Permission denied 1389814887::Installing MySQL system tables...2014-01-15 14:41:26 18342 [Warning] Buffered warning: Could not increase number of max_open_files to more than 1024 (request: 4096) 1389814887::2014-01-15 14:41:26 18342 [Warning] Buffered warning: Changed limits: max_connections: 214 (requested 800) 1389814887::2014-01-15 14:41:26 18342 [Warning] Buffered warning: Changed limits: table_cache: 400 (requested 1024) 1389814887::Filling help tables...2014-01-15 14:41:26 18348 [Warning] Buffered warning: Could not increase number of max_open_files to more than 1024 (request: 4096) 1389814887::2014-01-15 14:41:26 18348 [Warning] Buffered warning: Changed limits: max_connections: 214 (requested 800) 1389814887::2014-01-15 14:41:26 18348 [Warning] Buffered warning: Changed limits: table_cache: 400 (requested 1024) 1389814887::WARNING: Could not copy config file template /usr/share/mysql/my- default.cnf to 1389814887::WARNING: Default config file /etc/my.cnf exists on the system 1389814890::WARNING: A new file was added to xml alarm files...reparsing xml... 1389814891::WARNING: FILE: /usr/TKLC/plat/etc/alarms/lSMSAlarms.xml </pre>
14	<p>E5-APP-B: Select the most recent ugwrap log.</p> <p>Select ugwrap.log (which contains the latest ugwrap log) and press [ENTER].</p>  <p>The screenshot shows a terminal window with the following text:</p> <pre> Platform Configuration Utility 3.05 (C) 2003 - 2013 Tekelec, Inc. Hostname: ls2000 View Upgrade Logs Menu upgrade.log success.log manifest.normal.UPGRADE fail.log TPD-obsolete-normal-1.08-1386615143.noarch.rpm TPD-obsolete-normal.spec runlevel_transition_complete ugwrap.rc.info ugwrap.log normal.cache upgrade.info genManifest.rc rcscheck.before.upgrade ugwrap.restart genManifest.macros status_count S89ugwrap Use arrow keys to move between options <Enter> selects <F12> Main Menu </pre>

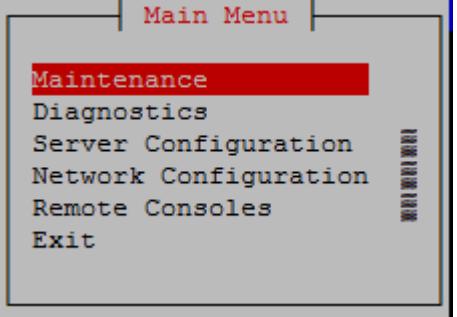
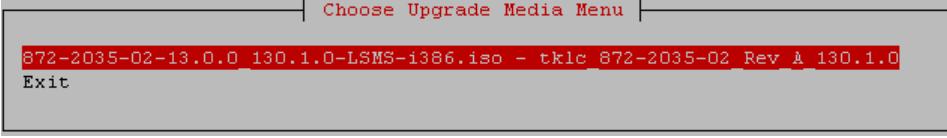
Upgrade/Installation Guide

Procedure 6: Install the Application

15	E5-APP-B: View the ugwrap log	Scroll down to the bottom of the file and look for the “ERROR” keyword. Presence of “ERROR” keyword indicates that upgrade might have failed.
		Note: If the upgrade was not successful, then contact Oracle Technical Service for further instructions.
		Once verified, exit the log viewer by selecting Exit .
		
		Or Execute the following command to find the “ERROR” keyword: <code># grep -i error /var/TKLC/log/upgrade/ugwrap.log</code>
		No display of ERROR is expected.
16	E5-APP-B: Exit to the diagnostics submenu.	Select Exit to exit the log view menu.
17	E5-APP-B: Logout.	Select Exit and press [ENTER] to return to the Main Menu . Select Exit and press [ENTER]. The “platcfg” utility terminates.
18	E5-APP-B: Install 1B E5-APP-B server	Complete steps 1 through 17 of this procedure for the 1B E5-APP-B server.

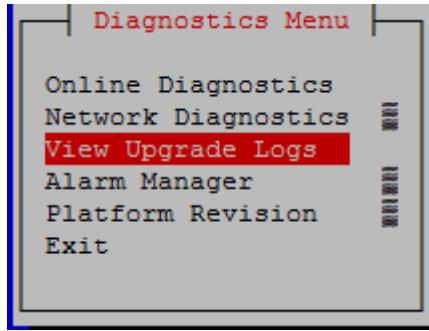
5.4 Upgrading the Application

Procedure 7: Upgrade the Application

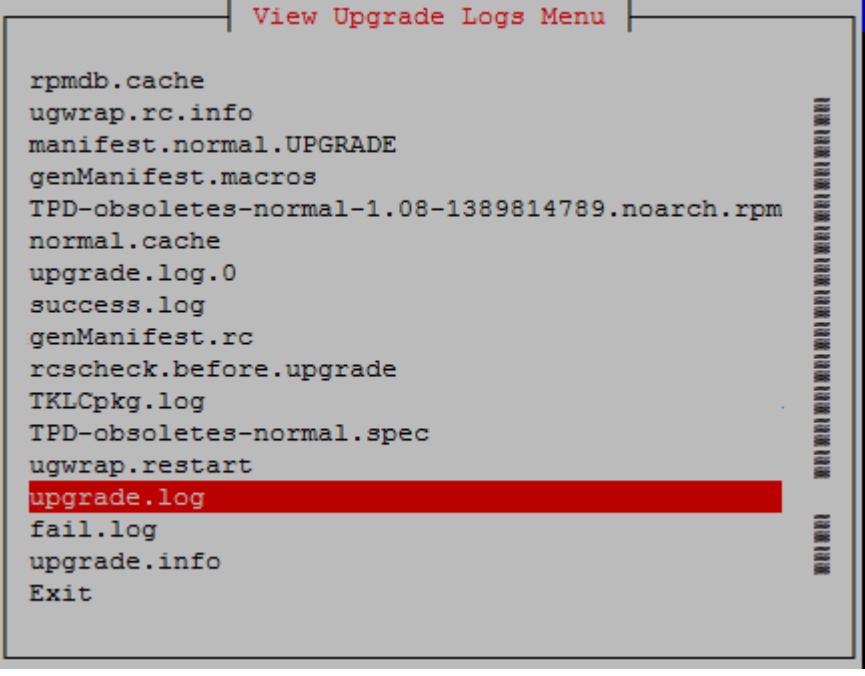
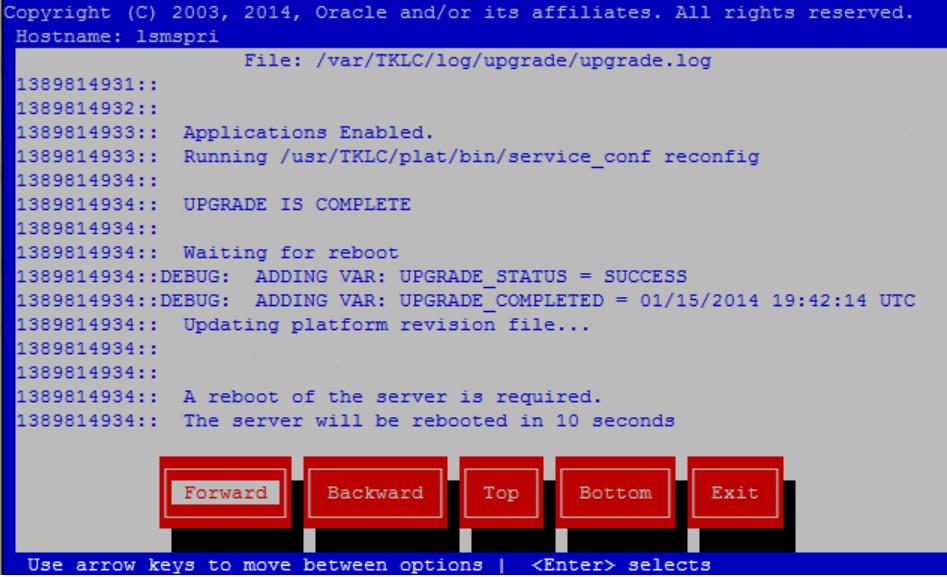
S T E P #	<p>This procedure upgrades the application on the server.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>IF THIS PROCEDURE FAILS, CONTACT THE ORACLE CUSTOMER CARE CENTER AND ASK FOR ASSISTANCE.</p>	
1 <input type="checkbox"/>	E5-APP-B: Upgrade 1A E5-APP-B server	Perform Procedure in 6.3A.2 or copy LSMS 13.x ISO to /var/TKLC/upgrade directory.
2 <input type="checkbox"/>	E5-APP-B: Start platcfg utility by logging in as platcfg user	[hostname] consolelogin: platcfg password: <i>password</i>
3 <input type="checkbox"/>	E5-APP-B: Select the Maintenance submenu	<p>The platcfg Main Menu appears.</p> <p>On the Main Menu, select Maintenance and press [ENTER].</p> 
4 <input type="checkbox"/>	E5-APP-B: Navigate to the Initiate Upgrade menu.	Select the Upgrade menu and press [ENTER]. Select the Initiate Upgrade menu and press [ENTER].
5 <input type="checkbox"/>	E5-APP-B: Select the Upgrade Media	The screen displays a message that it is searching for upgrade media. When the upgrade media is found, an Upgrade Media selection menu appears similar to the example below. Select the desired upgrade media and press [ENTER]. There should only be one selection available, as in the example below.
		
6 <input type="checkbox"/>	E5-APP-B: Upgrade proceeds	The screen displays the following, indicating that the upgrade software is first validating the media, and then proceeding with the upgrade.
		

Upgrade/Installation Guide

Procedure 7: Upgrade the Application

7 <input type="checkbox"/>	E5-APP-B: Upgrade proceeds	<p>Many informational messages appear on the terminal screen as the upgrade proceeds. The messages are not shown here for clarity sake.</p> <p>When upgrade is complete, the server reboots.</p>
8 <input type="checkbox"/>	E5-APP-B: Upgrade completed	<p>After the final reboot, the screen displays the login prompt as in the example below.</p> <pre>\$exit [OPLD][G001] Sending ADM_CAU to psk6 [OPLD][G002] Waiting for ADM_CAU from stack osisk6 psk6 00:09:16[80c1] SK6 AM TRACE LEVEL: 0 [OPLD][F002] *** Received ADM_CAU from STACK psk6 [OPLD][C002] Command mode is EXPLICIT Prefix [OK] Starting syscheck: [OK] Not ProLiant hardware, nothing for TKLChpacucli to do [OK] Starting TKLCsurv: [OK] Starting TKLCwatchdog: TKLCwatchdog: Reboot NOT due to watchdog [OK] Verifying disk configuration for S.M.A.R.T.: [OK] [OK] atd: [OK] Checking network config files: [OK] Starting TKLCsnmp service... [OK] Starting dbrep1Mon: [OK] Starting smartd: [OK] CentOS release 4.8 (Final) Kernel 2.6.18-1.2849prerel3.3.6_63.20.0 on an i686 lsmspri login: █</pre>
9 <input type="checkbox"/>	E5-APP-B: Start platcfg utility	<p>Start platcfg utility by logging in as platcfg user:</p> <pre>[hostname] consolelogin: platcfg password: password</pre>
10 <input type="checkbox"/>	E5-APP-B: Navigate to the Diagnostics Menu	<p>On the platcfg Main Menu, select Diagnostics and press [ENTER].</p>
11 <input type="checkbox"/>	E5-APP-B: Navigate to the View Upgrade Logs Menu	<p>On the Diagnostics menu, select View Upgrade Logs and press [ENTER].</p> 

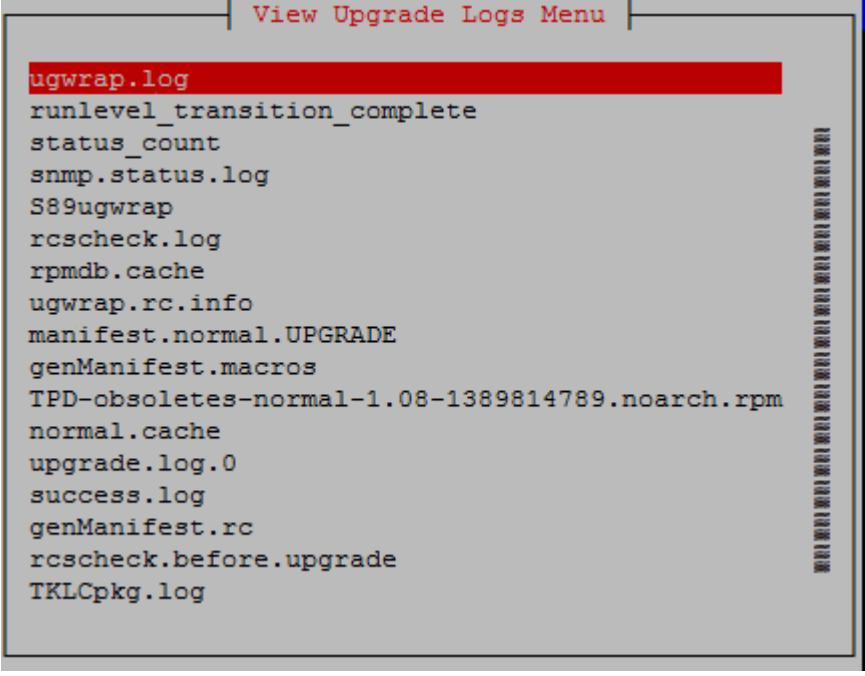
Procedure 7: Upgrade the Application

12	<p>E5-APP-B: Select the most recent upgrade log.</p>	<p>Select upgrade.log (which contains the latest upgrade log) and press [ENTER].</p>  <pre> View Upgrade Logs Menu rpmdb.cache ugwrap.rc.info manifest.normal.UPGRADE genManifest.macros TPD-obsolete-normal-1.08-1389814789.noarch.rpm normal.cache upgrade.log.0 success.log genManifest.rc rcscheck.before.upgrade TKLCpkg.log TPD-obsolete-normal.spec ugwrap.restart upgrade.log fail.log upgrade.info Exit </pre>
13	<p>E5-APP-B: View the upgrade log</p>	<p>Scroll down to the bottom of the file, and verify that the upgrade is complete. Once verified, exit the log viewer by selecting Exit.</p>  <pre> Copyright (C) 2003, 2014, Oracle and/or its affiliates. All rights reserved. Hostname: lsmspri File: /var/TKLC/log/upgrade/upgrade.log 1389814931:: 1389814932:: 1389814933:: Applications Enabled. 1389814933:: Running /usr/TKLC/plat/bin/service_conf reconfig 1389814934:: 1389814934:: UPGRADE IS COMPLETE 1389814934:: 1389814934:: Waiting for reboot 1389814934:: DEBUG: ADDING VAR: UPGRADE_STATUS = SUCCESS 1389814934:: DEBUG: ADDING VAR: UPGRADE_COMPLETED = 01/15/2014 19:42:14 UTC 1389814934:: Updating platform revision file... 1389814934:: 1389814934:: 1389814934:: A reboot of the server is required. 1389814934:: The server will be rebooted in 10 seconds Forward Backward Top Bottom Exit </pre> <p>Use arrow keys to move between options <Enter> selects</p> <p>Or execute the following commands from a prompt:</p> <pre># grep "UPGRADE IS COMPLETE" /var/TKLC/log/upgrade/upgrade.log</pre> <p>The expected output is similar to the following:</p> <pre>1389608030:: UPGRADE IS COMPLETE</pre> <pre># grep -i error /var/TKLC/log/upgrade/upgrade.log</pre>

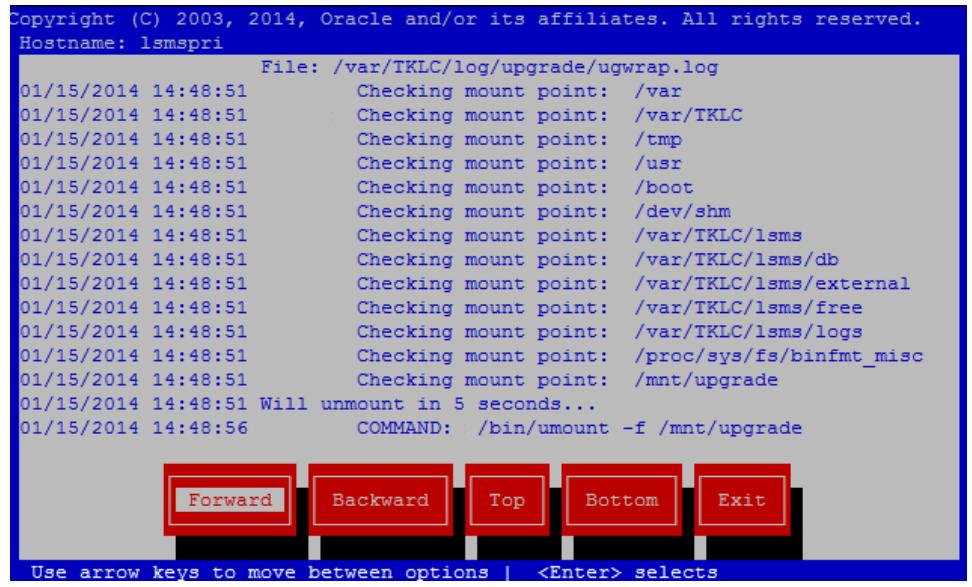
Procedure 7: Upgrade the Application

	<p>No error should be displayed.</p> <pre># grep -i warning /var/TKLC/log/upgrade/upgrade.log</pre> <p>The following warning are expected:</p> <p>1390222244::WARNING: Source file does not exist...cannot get diff! 1390222244::WARNING: SOURCE: /usr/lib/jvm/java-1.7.0-openjdk-1.7.0.25/jre/lib/logging.properties 1390222244::WARNING: Source file does not exist...cannot get diff! 1390222244::WARNING: SOURCE: /usr/lib/jvm/java-1.7.0-openjdk-1.7.0.25/jre/lib/security/nss.cfg 1390222244::WARNING: Source file does not exist...cannot get diff! 1390222244::WARNING: SOURCE: /usr/lib/jvm/java-1.7.0-openjdk-1.7.0.25/jre/lib/security/java.security 1390222244::WARNING: Source file does not exist...cannot get diff! 1390222244::WARNING: SOURCE: /usr/lib/jvm/java-1.7.0-openjdk-1.7.0.25/jre/lib/security/java.policy 1390222244::WARNING: Source file does not exist...cannot get diff! 1390222245::WARNING: SOURCE: /var/lib/misc/prelink.force 1390222245::WARNING: Source file does not exist...cannot get diff! 1390222246::WARNING: SOURCE: /etc/ntp/crypto/pw 1390222246::WARNING: Source file does not exist...cannot get diff! 1390222246::WARNING: SOURCE: /etc/sysconfig/ntpdate 1390222246::WARNING: Source file does not exist...cannot get diff! 1390222246::WARNING: SOURCE: /etc/sysconfig/network-scripts/ifcfg-eth03 1390222246::WARNING: Source file does not exist...cannot get diff! 1390222246::WARNING: SOURCE: /etc/sysconfig/network-scripts/ifcfg-eth01.100 1390222246::WARNING: Source file does not exist...cannot get diff! 1390222246::WARNING: SOURCE: /etc/sysconfig/network-scripts/ifcfg-eth02 1390222246::WARNING: Source file does not exist...cannot get diff! 1390222246::WARNING: SOURCE: /etc/sysconfig/network-scripts/ifcfg-eth01 1390222246::WARNING: Source file does not exist...cannot get diff! 1390222246::WARNING: SOURCE: /etc/sysconfig/network-scripts/ifcfg-eth04 1390222431::WARNING::Service RC script (/etc/rc.d/init.d/ntpdate) does not exist 1390222432::WARNING::or is not executable! 1390222432::WARNING::Service RC script (/etc/rc.d/init.d/ntpdate) does not exist 1390222433::WARNING::or is not executable! 1390222433::WARNING::Service RC script (/etc/rc.d/init.d/ntpdate) does not exist 1390222434::WARNING::or is not executable! 1390222434::WARNING::Service RC script (/etc/rc.d/init.d/ntpdate) does not exist 1390222435::WARNING::or is not executable! 1390222435::WARNING::Service RC script (/etc/rc.d/init.d/ntpdate) does not exist 1390222436::WARNING::or is not executable!</p>
--	--

Procedure 7: Upgrade the Application

14	<p>E5-APP-B: Select the most recent ugwrap log.</p> <p>Select ugwrap.log (which contains the latest upgrade log) and press [ENTER].</p> 
----	--

Procedure 7: Upgrade the Application

15	E5-APP-B: View the ugwrap log	<p>Scroll down to the bottom of the file and look for the “ERROR” keyword. Presence of “ERROR” keyword indicates that upgrade might have failed.</p> <p>Note: If the upgrade was not successful, then contact Oracle Technical Service for further instructions.</p>
		<p>Once verified, exit the log viewer by selecting Exit.</p>  <pre>Copyright (C) 2003, 2014, Oracle and/or its affiliates. All rights reserved. Hostname: lsmspri File: /var/TKLC/log/upgrade/ugwrap.log 01/15/2014 14:48:51 Checking mount point: /var 01/15/2014 14:48:51 Checking mount point: /var/TKLC 01/15/2014 14:48:51 Checking mount point: /tmp 01/15/2014 14:48:51 Checking mount point: /usr 01/15/2014 14:48:51 Checking mount point: /boot 01/15/2014 14:48:51 Checking mount point: /dev/shm 01/15/2014 14:48:51 Checking mount point: /var/TKLC/lsms 01/15/2014 14:48:51 Checking mount point: /var/TKLC/lsms/db 01/15/2014 14:48:51 Checking mount point: /var/TKLC/lsms/external 01/15/2014 14:48:51 Checking mount point: /var/TKLC/lsms/free 01/15/2014 14:48:51 Checking mount point: /var/TKLC/lsms/logs 01/15/2014 14:48:51 Checking mount point: /proc/sys/fs/binfmt_misc 01/15/2014 14:48:51 Checking mount point: /mnt/upgrade 01/15/2014 14:48:51 Will unmount in 5 seconds... 01/15/2014 14:48:56 COMMAND: /bin/umount -f /mnt/upgrade</pre>
		<p>Or Execute the following command to find the “ERROR” keyword:</p> <pre># grep -i error /var/TKLC/log/upgrade/ugwrap.log</pre> <p>No display of ERROR is expected.</p>
16	E5-APP-B: Exit to the diagnostics submenu.	<p>Select Exit to exit the log view menu.</p>
17	E5-APP-B: Exit Platcfg	<p>Select Exit and press [ENTER] to return to the Main Menu.</p> <p>Select Exit and press [ENTER]. The “platcfg” utility terminates.</p>
18	E5-APP-B: verify my.cnf	<p>Complete Procedure 17: Restore Customized my.cnf File.</p>
19	E5-APP-B: Upgrade 1B E5-APP-B server	<p>Repeat steps 1-18 on the 1B E5-APP-B.</p>

Procedure 7: Upgrade the Application

20	E5-APP-B: Reconnect console cable.	On E5-APP-B card, reconnect the console cable between the serial port labeled 'S0' on E5-APP-B A card's adapter and the serial port labeled 'S1' on the E5-APP-B B card's adapter. Cable part numbers - 830-1220-xx
21	1A: Login to 1A as lsmsmgr	[hostname]consolelogin: lsmsmgr Password: <i>password</i>
22	1A: Start Node - will make node active and start application	Select Maintenance and press [Enter] Select Start Node and press [Enter] Select Yes to confirm node startup press [Enter] Select Exit and press [Enter] to return to Main Menu Select Exit and press [Enter] to exit the lsmsmgr menu
23	1B: Login to 1B as lsmsmgr	[hostname]consolelogin: lsmsmgr Password: <i>password</i>
24	1B: Start Node - will make node standby and sync databases.	Select Maintenance and press [Enter] Select Start Node and press [Enter] Select Yes to confirm node startup and press [Enter] Select Exit and press [Enter] to return to Main Menu Select Exit and press [Enter] to exit the lsmsmgr menu
25	E5-APP-B: Upgrade Complete	NOTE: If the customer's Query Server is connected to the LSMS, please refer to Section 3.6 for details about upgrading the Query Server. To reload the Query Server, follow the instructions located in the LSMS Maintenance Manual ([6]). The instructions are located in the Appendixes under the section titled "Reload a Query Server Database from the LSMS". The incremental upgrade is now complete. Return to Table 5.

5.6 TMN Toolkit License Installation

Note: Valid Licenses need to be installed on both A and B LSMS servers.

Note: To request your license key for Oracle Communications LSMS, go to the Oracle License Code web site, licensecodes.oracle.com, and click on the "Request License Codes" link. Complete the required fields of the request form, and in the "How can we help you?" field, include the following items:

1. host name (lsmspri for A and lsmssec for B); and
2. MAC address for Ethernet interface eth01 (interface name after IPMed but before LSMS installation) or eth0 (interface name after LSMS installation).

Submit the request and you should receive a response within 24 hours.

Procedure 8: TMN Toolkit License Installation

S	This procedure will install the TMN Toolkit License to both A and B LSMS servers.	
T	Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.	
E P # IF THIS PROCEDURE FAILS, CONTACT ORACLE TECHNICAL SERVICES AND ASK FOR <u>UPGRADE ASSISTANCE</u> .		
1. <input type="checkbox"/>	E5-APP-B X: Log in to the server as the user "root"	console login: root password: <root_password>
2. <input type="checkbox"/>	E5-APP-B X: Install the license file	Execute this command to install the valid license. <code># cp <license-file> \$D_DIR/etc</code>
3. <input type="checkbox"/>	E5-APP-B X: Reboot the server	Reboot the system to take effect of the installed license <code># reboot</code>
4.	Procedure complete.	You have completed this procedure; please return to the procedure that directed you here.

5.7 Post-Initial Application Processing

Note: Before LSMS initial configuration, refer [9] to cable NAS, and refer section 3.8 to install NAS.

Procedure 9: Application-Specific Processing for Post-Initial Installation

S T E P #	<p>This procedure performs the post-install activity required by the LSMS application.</p> <p>NOTE: This procedure should not be completed if this is an upgrade. This procedure is only for initial installations of the application.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>IF THIS PROCEDURE FAILS, CONTACT THE ORACLE CUSTOMER CARE CENTER AND ASK FOR ASSISTANCE.</p>
1 <input type="checkbox"/>	<p>1A: Start lsmsmgr utility by logging in on 1A server as lsmsmgr user</p> <p>[hostname] consolelogin: lsmsmgr password: <i>password</i></p>
2 <input type="checkbox"/>	<p>1A: Perform first time login configuration</p> <p>Select Initial Configuration and press [ENTER] Select yes for Run All Select OK and press [ENTER] Type in root password when prompted to exchange root SSH keys Select OK and press [ENTER] Type in lsmsadm password when prompted to exchange lsmsadm SSH keys Select OK and press [ENTER] Accept the default serial port (ttyS2) when prompted for the path to the NAS console device. Select OK and press [ENTER] A message is displayed indicating the root Key Exchange was successful. A message is displayed indicating the lsmsadm Key Exchange was successful. A message is displayed indicating the Time Synchronization was successful. A message is displayed indicating the Database creation was successful. A message is displayed indicating the NAS Backup Configuration was successful. When message about hiding Initial Configuration menu is displayed, press [ENTER] Select Exit and press [ENTER] repeatedly to exit lsmsmgr</p>
3 <input type="checkbox"/>	<p>1B: Start lsmsmgr utility by logging in on 1A server as lsmsmgr user</p> <p>[hostname] consolelogin: lsmsmgr password: <i>password</i></p>
4 <input type="checkbox"/>	<p>1B: Perform first time login configuration</p> <p>Select Initial Configuration and press [ENTER] Select yes for Run All Select OK and press [ENTER] A message is displayed indicating the NAS Backup Configuration was successful. When message about hiding Initial Configuration menu is displayed, press [ENTER] Select Exit and press [ENTER] repeatedly to exit lsmsmgr</p>

5.7 Post-Initial Application Processing

Note: Before LSMS initial configuration, refer [9] to cable NAS, and refer section 3.8 to install NAS.

Procedure 9: Application-Specific Processing for Post-Initial Installation

1	1A: Start platcfg utility by logging in on 1A server as platcfg user	[hostname] consolelogin: platcfg
2	1A: Restart the 1A server.	Select Maintenance and press [ENTER] Select Restart Server and press [ENTER] Confirm the server restart. Respond to the confirmation question : “Do you wish to restart the server”. Select “Yes” and press [ENTER] . Confirm the server restart again. Respond to the confirmation question: “Are you sure you want to restart the server?”. Select “Yes” and press [ENTER] .
3	1B: Start platcfg utility by logging in on 1A server as platcfg user	[hostname] consolelogin: platcfg password: <i>password</i>
4	1B: Restart the 1B server.	Select Maintenance and press [ENTER] Select Restart Server and press [ENTER] Confirm the server restart. Respond to the confirmation question : “Do you wish to restart the server”. Select “Yes” and press [ENTER] . Confirm the server restart again. Respond to the confirmation question: “Are you sure you want to restart the server?”. Select “Yes” and press [ENTER] .

5.8 Post-Upgrade Health Check

Procedure 10: Post-Upgrade Health Check

S	This procedure determines the health of the Server after a upgrade. This procedure will perform a syscheck on each LSMS server, verify that MySQL replication is functioning correctly between the two LSMS servers, and capture command output to be used later.	
T	Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.	
E		IF THIS PROCEDURE FAILS, CONTACT THE ORACLE CUSTOMER CARE CENTER AND ASK FOR ASSISTANCE.
P		
#		
1	E5-APP-B: Verify Health of the Server	Execute Procedure 13 on the 1A and 1B servers to verify the health of the server. NOTE: If this upgrade is an initial installation of the LSMS application Some errors will be present until the system is fully configured and installed at the customer site. Only verify that the following syscheck classes pass (the first 3 classes in the output): <ul style="list-style-type: none">• disk• hardware• net If this upgrade is an initial installation of the LSMS application please proceed to Step 14 of this procedure, otherwise continue to the next step.

Procedure 10: Post-Upgrade Health Check

2	E5-APP-B: Login to either LSMS server as the user “root”.	[hostname] consolelogin: root password: <i>password</i>
3	E5-APP-B: Execute the “hastatus” command to verify the HA state of this server.	Execute the following command to verify that you are on the STANDBY server. # hastatus If the output from the above command is “ACTIVE” then you are on the ACTIVE server and not the STANDBY server. Proceed to the next step of this procedure. If the output from the above command is “STANDBY” than you are on the STANDBY server, please proceed to Step 7 of this procedure.
4	E5-APP-B: SSH to the mate server.	Execute the following command to SSH to the mate server in order to verify that it is the STANDBY server. # ssh mate
5	E5-APP-B: Execute the “hastatus” command to verify the HA state of this server.	Execute the following command to verify that you are on the STANDBY server. # hastatus If the output from the above command is “STANDBY” than you are on the STANDBY server, please proceed to the next step of this procedure. WARNING: If the output from the above command is anything else other than “STANDBY” do not proceed with this upgrade and contact the Oracle Customer Care Center and assistance.
6	E5-APP-B: Login as the user “root” on the STANDBY server.	[hostname] consolelogin: root password: <i>password</i>

Upgrade/Installation Guide

Procedure 10: Post-Upgrade Health Check

7	E5-APP-B: Verify that the STANDBY server's MySQL replication is functioning properly	<p>Execute the following command to verify that MySQL replication is working correctly on the STANDBY LSMS server:</p> <pre># tail /var/TKLC/lsms/logs/dbrep1Mon.log</pre> <p>If MySQL replication is functioning correctly then the following output will be observed, make sure that at least the last line of your output matches the lines below.</p> <pre>Tue Nov 13 15:15:35 2007 All tests passed on STANDBY Tue Nov 13 15:16:38 2007 All tests passed on STANDBY Tue Nov 13 15:17:41 2007 All tests passed on STANDBY Tue Nov 13 15:18:45 2007 All tests passed on STANDBY Tue Nov 13 15:19:48 2007 All tests passed on STANDBY Tue Nov 13 15:20:52 2007 All tests passed on STANDBY Tue Nov 13 15:21:55 2007 All tests passed on STANDBY Tue Nov 13 15:22:59 2007 All tests passed on STANDBY Tue Nov 13 15:24:03 2007 All tests passed on STANDBY Tue Nov 13 15:25:08 2007 All tests passed on STANDBY</pre> <p>WARNING: If at least the last line of your output does not match the lines above then do not proceed with this upgrade and contact the Oracle Customer Care Center for assistance.</p>
8	E5-APP-B: Login as the user "lsmssadm" on the ACTIVE server.	<pre>[hostname] consolelogin: lsmssadm password: password</pre>
9	E5-APP-B: Capture the output of the "lsmssdb -c counts" command.	<p>Execute the following command on the ACTIVE LSMS server to display the current LSMS database counts:</p> <pre>\$ lsmssdb -c counts</pre> <p>NOTE: Capture the output from this command and make it available to the Oracle Customer Care Center if required.</p>
10	E5-APP-B: Capture the output of the "lsmssdb -c features" command.	<p>Execute the following command on the ACTIVE LSMS server to display the current LSMS feature configuration:</p> <pre>\$ lsmssdb -c features</pre> <p>NOTE: Capture the output from this command and make it available to the Oracle Customer Care Center if required.</p>

Procedure 10: Post-Upgrade Health Check

11	<p>E5-APP-B: Capture the output of the “sentry status” command.</p>	<p>Execute the following command on the ACTIVE LSMS server to display the current LSMS sentry status:</p> <pre>§ sentry status</pre> <p>NOTE: Verify that the output displays a Status of “running” for all processes; the regional processes (npacagents) may or may not be associated in the Comment field. If the output from this command displays any other Status than “running” contact the Oracle Customer Care Center and ask for assistance.</p> <p>Capture the output from this command and make it available to the Oracle Customer Care Center if required.</p>
12	<p>E5-APP-B: Capture the output of the “eagle status” command.</p>	<p>Execute the following command on the ACTIVE LSMS to display the current LSMS eagle status:</p> <pre>§ eagle status</pre> <p>NOTE: Capture the output from this command and compare it to the output captured from the eagle status command in Procedure 2: Pre-Upgrade Health Check. For each CLLI that had an ACTIVE State (A_ or B_ is irrelevant) before the upgrade should now have an ACTIVE state post upgrade. Depending on how long after the upgrade this procedure is run the resync may or may not be “COMPLETE”. This status should be monitored until the resync is complete. If the resync does not complete contact the Oracle Customer Care Center and ask for assistance.</p> <p>Capture the output from this command and make it available to the Oracle Customer Care Center if required</p>
13	<p>E5-APP-B: Check MySQL version if connected with a Query Server</p>	<p>Excute the following command on the the ACTIVE LSMS to determine if a QS is connected:</p> <pre>§ lsmldb -c queryservers</pre> <ul style="list-style-type: none"> • If there is QS connected, output similar to the following displays: Queryserv1 (10.25.60.32) Connected <p>On QS Solaris server: Determine whether the Oracle-provided MySQL version is installed on supported release: Enter the following command. # /opt/TKLCplat/mysql/bin/mysql -V The output should display the running MySQL version is 5.6.14. If the version is other than 5.6.14, contact the Oracle Customer Care Center (1-800-432-8919) and ask for assistance.</p> <p>See Section 3.6 QS Upgrade for additional details.</p> <ul style="list-style-type: none"> • If there is no QS connected, NO output will display.

Procedure 10: Post-Upgrade Health Check

14 <input type="checkbox"/>	E5-APP-B: The Post-Upgrade Health Check is complete.	This procedure is complete. Return to the Table in Section 3 that directed you to this procedure.
--------------------------------	---	---

5.9 Turbo Bulk Download Feature Activation

Procedure 11: Turbo Bulk Download Feature Activation

S <input type="checkbox"/>	This procedure enables the “Turbo Bulk Download” feature and can be executed by Oracle personnel only. This feature works only with ELAP release greater than 5.0.2-55.17.0	
T <input type="checkbox"/>	Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.	
E <input type="checkbox"/>	IF THIS PROCEDURE FAILS, CONTACT THE ORACLE CUSTOMER CARE CENTER AND ASK FOR ASSISTANCE.	
P <input type="checkbox"/>	1 ELAP: Verify ELAP release(s)	On all ELAP systems connected to LSMS verify that the ELAP release is greater than 5.0.2-55.17.0 This feature will not work with ELAP release below 5.0.2-55.17.0. NOTE: In order to verify the ELAP release(s), each ELAP system configured for the LSMS in question must be logged into and have its ELAP software release verified. For E5-APP-B based ELAP's, this can be done using the command “rpm -qi TKLCelap” while logged in as the elapdev user.
# <input type="checkbox"/>	2 LSMS login: login into active LSMS as lsmsadm	[hostname] consolelogin: lsmsadm password: <i>password</i>
# <input type="checkbox"/>	3 LSMS: enable the feature using dbcfginternal tool	\$ dbcfginternal BULK_LOAD_TURBO Y <i>This command is for use only by Oracle customer service.</i> <i>Enter Customer Service ID:</i> <i>Type in the Customer Service ID and press enter.</i>

THIS COMPLETES THE INITIAL CONFIGURATION!

UPGRADE

6. RECOVERY PROCEDURES

Execute this section only if there is a problem and it is desired to revert back to the pre-upgrade version of the software.

Warning: Do not attempt to perform these backout procedures without first contacting the Oracle Customer Care Center at 1-888-FOR-TKLC or 1-888-367-8552; or for international callers 1-919-460-2150.

NOTE: These recovery procedures are provided for the backout of an Upgrade ONLY (i.e., from a failed 13.y release to the previously installed 13.x release). Backout of an initial installation is not supported.

6.1 Backout Setup

The reason to execute a backout has a direct impact on any backout preparation that must be done. Since the reason cannot be known ahead of time, no definitive procedure can be written.

Oracle Customer Support personnel will have to have login access to the affected E5-APP-B, probe the server for the root cause of the problem, and execute whatever setup or cleanup is necessary in order to prepare the E5-APP-B for backout.

6.2 Perform Backout

No matter the initial cause of the upgrade problem, once all necessary corrective steps have been taken to prepare for the backout, then the following procedure can be executed to perform a backout.

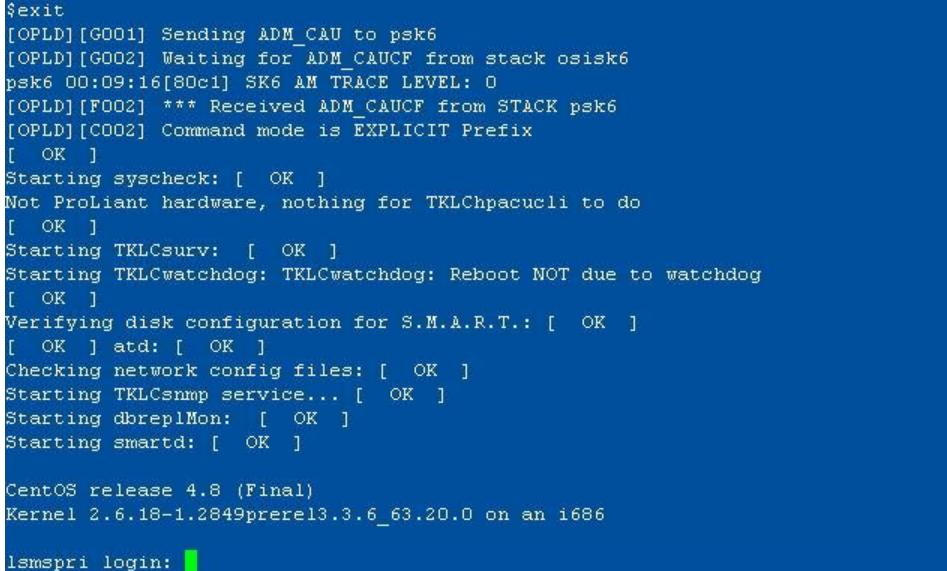
6.3 Backout

Procedure 12: E5-APP-B Backout Procedure

S T E P #	<p>This procedure will back out an upgrade of LSMS application software. This procedure can be done if only 1 E5-APP-B needs a backout, or if both need a backout.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p>	
1 <input type="checkbox"/>	1B: Login to 1B as lsmsmgr	[hostname] consolelogin: lsmsmgr password: <i>password</i>
2 <input type="checkbox"/>	1B: Stop Node - will stop the node and replication	<p>Select Maintenance and press [Enter] Select Stop Node and press [Enter] Select Yes to confirm node shutdown press [Enter]</p> <p>Select Exit and press [Enter] to return to Main Menu Select Exit and press [Enter] to exit the lsmsmgr menu</p>
3 <input type="checkbox"/>	1A: Login to 1A as lsmsmgr	[hostname] consolelogin: lsmsmgr Password: <i>password</i>
4 <input type="checkbox"/>	1A: Stop Node - will stop the node and the LSMS application.	<p>Select Maintenance and press [Enter] Select Stop Node and press [Enter] Select Yes to confirm node shutdown and press [Enter]</p> <p>Select Exit and press [Enter] to return to Main Menu Select Exit and press [Enter] to exit the lsmsmgr menu</p>
5 <input type="checkbox"/>	Determine which E5-APP-B needs a backout	If only one E5-APP-B needs a backout, perform backout on that server. If both need a backout, backout E5-APP-B 1A first, and then E5-APP-B 1B.
6 <input type="checkbox"/>	E5-APP-B: Log in to the server as user root	[hostname] consolelogin: root password: <i>password</i>
7 <input type="checkbox"/>	E5-APP-B: Change directory	Change to the backout directory. \$ cd /var/TKLC/backout
8 <input type="checkbox"/>	E5-APP-B: Execute the backout	<p>Execute the backout using the ugwrap script.</p> <p>\$./ugwrap --backout</p> <p>NOTE: If backout asks if you would like to proceed with upgrade, answer "Y".</p>

Upgrade/Installation Guide

Procedure 12: E5-APP-B Backout Procedure

9	E5-APP-B: Backout proceeds	Many informational messages will come across the terminal screen as the backout proceeds. Finally, after backout is complete a message will be displayed stating that a reboot is required. Proceed to the next step of this procedure to verify the backout before rebooting by following the rest of this procedure.
10	E5-APP-B: Verify the Backout	Examine the upgrade logs in the directory <code>/var/TKLC/log/upgrade</code> and verify that no errors were reported. \$ grep -i error /var/TKLC/log/upgrade/upgrade.log Examine the output of the above command to determine if any errors were reported .
11	E5-APP-B: Verify the backout for Incremental Upgrade.	If the backout was not successful and errors were recorded in the logs, then contact Oracle Technical Service for further instructions. If the backout was successful, then continue with the following steps:
12	E5-APP-B: Reboot the server	Enter the following command to reboot the server. \$ init 6
13	E5-APP-B: Reboot completed	After the reboot, the screen will display the login prompt, as shown in the example below.  The terminal session shows a successful reboot of a CentOS 4.8 system. The log includes messages about disk configuration, network config files, and services like dbrep1Mon and smartd starting. It ends with a 'CentOS release 4.8 (Final)' message and a 'Kernel 2.6.18-1.2849prere13.3.6_63.20.0 on an i686' message, followed by a 'lsmpri login:' prompt.
14	E5-APP-B: Login	[hostname] consolelogin: root password: <i>password</i>

Upgrade/Installation Guide

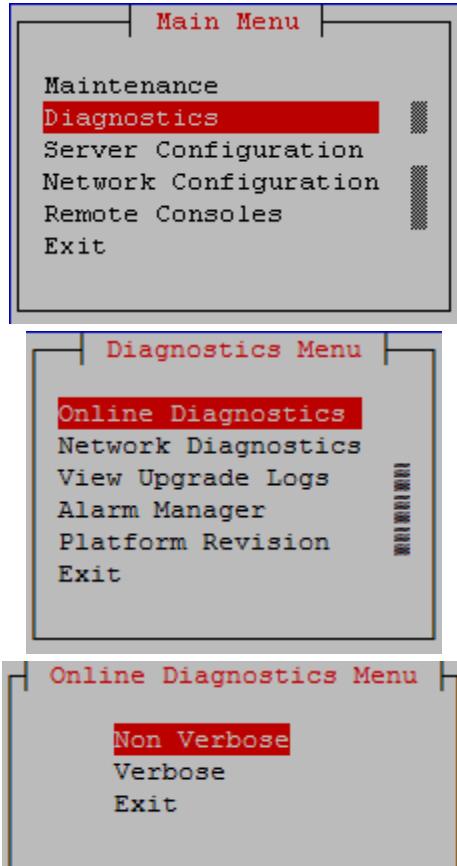
Procedure 12: E5-APP-B Backout Procedure

15 <input type="checkbox"/>	E5-APP-B: Backout is complete. Verify Health of E5-APP-B	Execute section A.1 on E5-APP-B to verify the health of the E5-APP-B
16 <input type="checkbox"/>	E5-APP-B: Backout mate E5-APP-B	If backing out both servers, perform steps 6-15 on the 1B E5-APP-B.
17 <input type="checkbox"/>	1A: Login to 1A as lsmsmgr	[hostname]consolelogin: lsmsmgr Password: <i>password</i>
18 <input type="checkbox"/>	1A: Start Node - will make node active and start application	Select Maintenance and press [Enter] Select Start Node and press [Enter] Select Yes to confirm node startup press [Enter] Select Exit and press [Enter] to return to Main Menu Select Exit and press [Enter] to exit the lsmsmgr menu
19 <input type="checkbox"/>	1B: Login to 1B as lsmsmgr	[hostname]consolelogin: lsmsmgr Password: <i>password</i>
20 <input type="checkbox"/>	1B: Start Node - will make node standby and sync databases.	Select Maintenance and press [Enter] Select Start Node and press [Enter] Select Yes to confirm node startup and press [Enter] Select Exit and press [Enter] to return to Main Menu Select Exit and press [Enter] to exit the lsmsmgr menu
21 <input type="checkbox"/>	E5-APP-B: Backout is done	The backout procedure is complete .

APPENDIX A. GENERIC PROCEDURES

A.1 Perform System Health Check

Procedure 13: Perform System Health Check

S T E P #	<p>This procedure performs a system health check on any E5-APP-B.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>IF THIS PROCEDURE FAILS, CONTACT THE ORACLE CUSTOMER CARE CENTER AND ASK FOR ASSISTANCE.</p>
1 <input type="checkbox"/>	<p>Start platcfg utility by logging in server as platcfg.</p> <p>[hostname] consolelogin: platcfg Password: password</p>
2 <input type="checkbox"/>	<p>Make selections on the Main Menu of the Platform Configuration Utility.</p> <p>On the Main Menu, select the Diagnostics submenu, and press [ENTER]. Select Online Diagnostics, and press [ENTER]. Select Non Verbose, and press [ENTER].</p> 

Upgrade/Installation Guide

Procedure 13: Perform System Health Check

3	Examine the output of the Online Diagnostics.	<p>Non-verbose diagnostic results appear on the screen. Actual results differ from this example.</p> <pre>Copyright (C) 2003, 2014, Oracle and/or its affiliates. All rights reserved. Hostname: lsmspri Online Diagnostics Output Running modules in class net... OK Running modules in class disk... OK Running modules in class hardware... OK Running modules in class proc... * ntp: FAILURE:: MINOR::5000000000000200 -- Server NTP Daemon Not Synchronized * ntp: FAILURE:: ntp is not synchronized. One or more module in class "proc" FAILED Running modules in class lsmshc... * users: FAILURE:: MINOR::50000000000040000 -- Platform Health Check Failure t* users: FAILURE:: Unable to copy /etc/passwd from mate [Forward] [Backward] [Top] [Bottom] [Exit] Use arrow keys to move between options <Enter> selects</pre>
4	System Check Successful	If the System Check was successful you have completed this procedure, return to the procedure from which you came.
5	Detection of a survMon alarm in syscheck	<p>If the System Check detects the following error for the “proc” class please proceed to the next step of this procedure for corrective action;</p> <pre>Running modules in class proc... * run: FAILURE:: MINOR::5000000000000002 -- Server Application Process Error * run: FAILURE:: Only 0 instance(s) of survMon running. 1 instance(s) required! One or more module in class "proc" FAILED</pre> <p>If System Check detected any other failures please proceed to step 9 of this procedure.</p>
6	Verify contents of survMon last state file.	<p>Execute the following command to verify that the last state/status of the “lsmssurv” process is stop:</p> <pre>[root@lsmspri ~]# cat /usr/TKLC/lsms/config/lsmssurv.last STOP</pre>
7	Start Surveillance (survMon).	<p>Execute the following command to “lsmssurv” process, this will start the LSMS survMon:</p> <pre>[root@lsmspri ~]# /usr/TKLC/lsms/bin/lsmssurv start LSMS Surveillance feature started</pre>

Upgrade/Installation Guide

Procedure 13: Perform System Health Check

8	Verify contents of survMon last state file.	Execute the following command to verify that the last state/status of the "lsmssurv" process is start, this will insure that the crond daemon will restart it upon a failure: [root@lsmsspri ~]# cat /usr/TKLC/lsms/config/lsmsSurv.last START You have successfully completed this procedure, return to the procedure from which you came.
9	System Check Failure	.If System Check detected any failures, please contact the Oracle Customer Care Center (1-800-432-8919) and ask for assistance. Any errors must be well understood before proceeding with the upgrade, errors concerning core files may be ignored. Note: that if no application is installed, the message "No alarm dispatch utility available" is not a failure.

A.2 ISO Image copy from USB Media

Assumption: The USB media contains the desired LSMS ISO.

Procedure 14: ISO Image copy from USB media

S T E P #	This procedure provides instructions to copy an ISO image from an USB media. Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number. IF THIS PROCEDURE FAILS, CONTACT ORACLE TECHNICAL SERVICES AND ASK FOR UPGRADE ASSISTANCE.	
1.	E5-APP-B X: Insert USB.	Insert media in USB drive
2.	E5-APP-B X: Log in to the server as the "root" user.	[hostname] consolelogin: root password: password
3.	E5-APP-B X: Run syscheck to make sure there is no error.	Execute the following command: # syscheck The output should look like: [root@hostname ~]# syscheck Running modules in class proc... OK Running modules in class services... OK Running modules in class system... OK Running modules in class disk... OK Running modules in class hardware... OK Running modules in class net... OK LOG LOCATION: /var/TKLC/log/syscheck/fail_log
4.	E5-APP-B X: Verify ISO image doesn't already	Execute the following command to perform directory listing: # ls -al /var/TKLC/upgrade

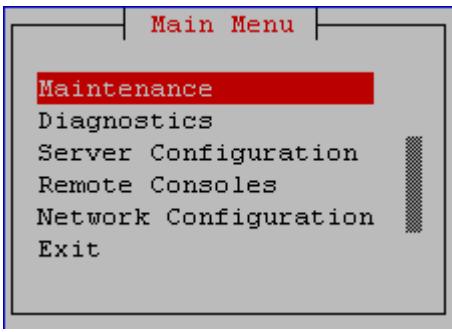
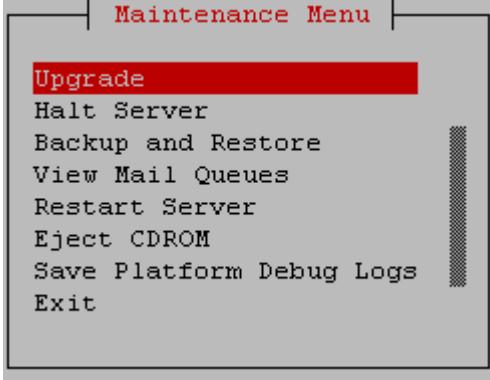
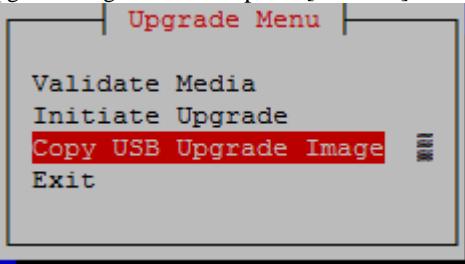
Upgrade/Installation Guide

Procedure 14: ISO Image copy from USB media

	<p>exist.</p> <p>The output should look like:</p> <pre>[root@hostname ~]# ls -al /var/TKLC/upgrade total 16 dr-xr-xr-x 2 root root 4096 Oct 22 16:31 . dr-xr-xr-x 21 root root 4096 Oct 18 13:40 ..</pre> <p>If an ISO image exists, remove it by executing the following command:</p> <pre># rm -f /var/TKLC/upgrade/<ISO image></pre>
5. <input type="checkbox"/>	<p>E5-APP-B X: Delete unwanted ISOs from USB media.</p> <p>Execute the following command to create a directory to mount the USB media:</p> <pre># mkdir -p /mnt/usb</pre> <p>Execute the following command to get the USB drive name:</p> <pre># fdisk -l grep FAT</pre> <p>The output should look like:</p> <pre>/dev/sdc1 * 1 812 831472 6 FAT16</pre> <p>Execute the following command to mount the USB media using the USB drive name from the output above:</p> <pre># mount /dev/sdc1 /mnt/usb</pre> <p>Execute the following command to perform directory listing and verify the file name format is as expected:</p> <pre># ls -al /mnt/usb</pre> <p>The output should look like:</p> <pre>[root@hostname ~]# ls -al /mnt/usb total 629400 dr-xr-xr-x 2 root root 4096 Dec 5 13:33 . dr-xr-xr-x 22 root root 4096 Dec 5 13:55 .. -rw-r--r-- 1 root root 829595648 Dec 5 16:20 872-2035-02-13.0.0_130.2.0-LSMS-i386.iso</pre> <p>Only one ISO file should be listed, if additional files are listed, execute the following command to remove unwanted ISOs:</p> <pre># rm -f /mnt/usb/<ISO_NAME>.iso</pre> <p>For e.g.,</p> <pre># rm -f /mnt/usb/872-2035-02-13.0.0_130.1.0-LSMS-i386.iso</pre> <p>Execute the following command to unmount the USB media:</p> <pre># umount /mnt/usb</pre>
6. <input type="checkbox"/>	<p>E5-APP-B X: Verify space exists for ISO.</p> <p>Execute the following command to verify the available disk space:</p> <pre># df -h /var/TKLC</pre> <p>The output should look like:</p> <pre>[root@hostname ~]# df -h /var/TKLC Filesystem Size Used Avail Use% Mounted on /dev/md7 3.9G 89M 3.7G 3% /var/TKLC</pre> <p>Verify that there is at least 620M in the Avail column. If not, clean up files until there is space available.</p>

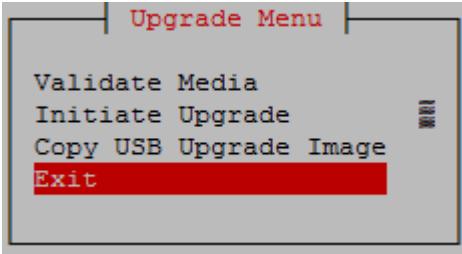
Upgrade/Installation Guide

Procedure 14: ISO Image copy from USB media

		<p>CAUTION: Make sure you know what files you can remove safely before cleaning up. It is recommended that you only clean up files in the /var/TKLC/upgrade directory as this is a platform owned directory that should only contain ISO images. This directory should not be expected to contain images for any length of time as they can get purged. Contact Technical Services beforehand if removing files other than the /var/TKLC/upgrade directory as removing files is dangerous.</p>
7. <input type="checkbox"/>	E5-APP-B X: Start platcfg utility.	Execute the following command to change the user: # su - platcfg
8. <input type="checkbox"/>	E5-APP-B X: Select the Maintenance submenu.	On the Main Menu of the Platform Configuration Utility, select Maintenance and press [ENTER] .
		
9. <input type="checkbox"/>	E5-APP-B X: Select the Upgrade submenu.	Select the Upgrade menu and press [ENTER] .
		
10.	E5-APP-B X: Select Copy USB Upgrade Image submenu.	Select the Copy USB Upgrade Image menu and press [ENTER] .
		
11. <input type="checkbox"/>	E5-APP-B X: The ISO will be copied from the USB media to /var/TKLC/upgrade.	<p>Copying /mnt/upgrade/872-2035-02-13.0.0_130.2.0-LSMS-i386.iso...</p> <p>PRESS ANY KEY TO RETURN TO THE PLATCFG MENU.</p>
		Press any key to return to

Upgrade/Installation Guide

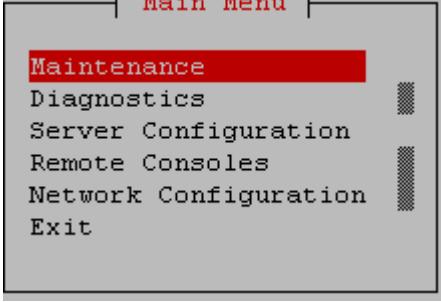
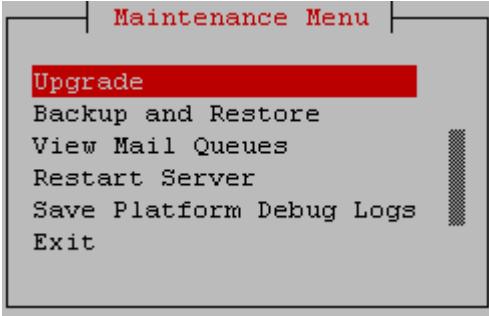
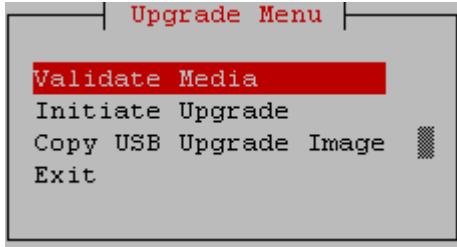
Procedure 14: ISO Image copy from USB media

	Upgrade menu.	
12. <input type="checkbox"/>	E5-APP-B X: Exit platcfg.	Select Exit and press [ENTER] repeatedly until the “platcfg” utility terminates. 
13. <input type="checkbox"/>	E5-APP-B X: Verify ISO image exists.	Execute the following command to perform directory listing: <code># ls -al /var/TKLC/upgrade</code> The output should look like: <code>[root@hostname ~]# ls -al /var/TKLC/upgrade total 16 dr-xr-xr-x 2 root root 4096 Oct 22 16:31 . dr-xr-xr-x 21 root root 4096 Oct 18 13:40 .. -rw-r--r-- 1 root root 643852288 Oct 15 15:37 872-2035-02-13.0.0_130.2.0-LSMS-i386.iso</code> Repeat this procedure from step 5 if LSMS ISO file is not as expected.
14. <input type="checkbox"/>	E5-APP-B X: Logout from server.	Logout from the server by executing the following command: <code># logout</code>
15. <input type="checkbox"/>	E5-APP-B X: Remove USB media.	Remove media from USB drive.
16. <input type="checkbox"/>	E5-APP-B X: Validate ISO file.	Validate ISO file using procedure A.3.
17. <input type="checkbox"/>	Procedure complete.	This procedure is complete.

A.3 Validate Upgrade Media

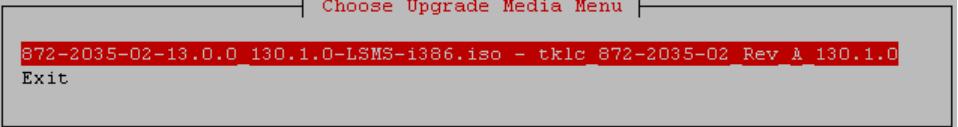
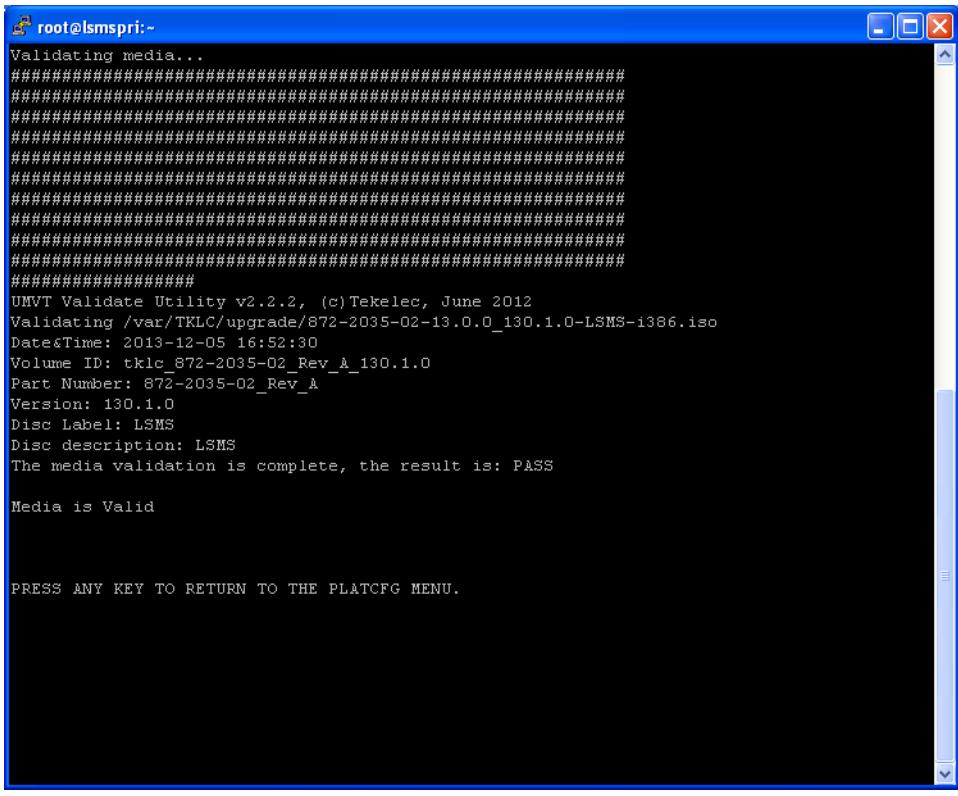
This procedure is used to execute a validation of the Upgrade Media (typically an ISO image) separately from executing an upgrade. The upgrade process automatically validates the upgrade media. However, sometime the user may wish to perform just a validation before proceeding with upgrade, thus the reason for this separate process.

Procedure 15: Validate the Upgrade Media

S	This procedure provides instructions to perform a validation of the upgrade media on the server. This procedure assumes that the E5-APP-B IPM procedure has been executed and the user has an application Upgrade ISO image available.	
T	Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.	
E	# IF THIS PROCEDURE FAILS, CONTACT THE ORACLE CUSTOMER CARE CENTER AND ASK FOR ASSISTANCE.	
1	E5-APP-B: Start platcfg utility by logging in as platcfg user hostname] consolelogin: platcfg Password: <i>password</i>	
2	E5-APP-B: Select the Maintenance submenu On the Main Menu of the Platform Configuration Utility, select Maintenance and press [ENTER]. 	
3	E5-APP-B: Navigate to the media validation function. Select the Upgrade menu and press [ENTER].  Select the Validate Media menu and press [ENTER]. 	

Upgrade/Installation Guide

Procedure 15: Validate the Upgrade Media

4	E5-APP-B: Output from the Validate Media selection.	<p>The screen displays a message that it is searching for upgrade media. Once the upgrade media is found, an Upgrade Media selection menu appears similar to the example below. Select the desired upgrade media and press [ENTER]. There should only be one selection available, as in the example below.</p> <div style="border: 1px solid black; padding: 5px; text-align: center;">  </div>
5	E5-APP-B: View the Validation results	<p>The results of the validation are displayed, similar to the example below. Press [ENTER] to continue.</p> <div style="border: 1px solid black; padding: 5px; background-color: black; color: white;">  </div>
6	E5-APP-B: Go to the Upgrade menu.	<p>Select Exit and press [ENTER] repeatedly until the “platcfg” utility terminates.</p>
7	E5-APP-B: Validation complete.	<p>Media Validation is complete.</p>

APPENDIX B. SITE CONFIGURATION

The following procedures describe configuring the E5-APP-B at the customer's site. Since these procedures are to be executed on site, not part of the manufacturing process. The information here is purely informational only.

NOTE: Only Single Subnet Configuration is supported on E5-APP-B.

NOTE: Refer [9] for LSMS and NAS cabling.

B.1 Single Subnet Configuration

Procedure 16: Single Subnet Configuration

S	This procedure configures the system at the customer site.	
T	Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.	
E	IF THIS PROCEDURE FAILS, CONTACT THE ORACLE CUSTOMER CARE CENTER AND ASK FOR ASSISTANCE.	
P		
#		
1	1A: Start lsmsmgr utility by login to 1A as lsmsmgr	[hostname] consolelogin: lsmsmgr password: password
2	1A: Verify time zone.	Select Server Configuration and press [ENTER] . Select Time Zone and press [ENTER] . The screen shows the current time zone setting. If this is not correct, select Edit and press [ENTER] . If the time zone is correct, select Exit , press [ENTER] and skip the next step
3	1A: Change time zone.	Select appropriate time zone. Use right arrow to get to OK and press [ENTER] . Select Exit and press [ENTER] . Select Exit and press [ENTER] repeatedly to return to the login prompt
4	1B: Start lsmsmgr utility by login in as lsmsmgr	[hostname] consolelogin: lsmsmgr password: password
5	1B: Verify time zone.	Select Server Configuration and press [ENTER] . Select Time Zone and press [ENTER] . The screen shows the current time zone setting. If this is not correct, select Edit and press [ENTER] . If the time zone is correct, select Exit , press [ENTER] and skip the next step

Procedure 16: Single Subnet Configuration

6	1B: Change time zone.	Select appropriate time zone. Use right arrow to get to OK and press [ENTER] . Select Exit and press [ENTER] . Select Exit and press [ENTER] repeatedly to return to the main menu
7	1A: Start lsmsmgr utility by login as lsmsmgr user	[hostname] consolelogin: lsmsmgr password: <i>password</i>
8	1A: Change the network configuration	Select Network Configuration and press [ENTER] . Select Network Reconfiguration and press [ENTER] . A lynx driven screen will appear with the following prompt; Do you want to execute "//usr/TKLC/lsms/tools/lsmsnetAdm-bin/lsmsnetadm.cgi"? Type "Y/y" to continue and the next screen will appear and press the right arrow key to follow the link
9	1A: Enter network values.	Using the up and down arrows, scroll through the text fields, entering the desired values (to enter the netmask, highlight the field and then use the enter key or right arrow key to display the dropdown menu, choose the desired value from the list) for each of the following settings: System Number 1A server hostname 1B server hostname 1A server App/EMS/NPAC IP address and netmask 1B server App/EMS/NPAC IP address and netmask Network Pingable gateways (optional, comma delimited) Application network VIP address Default route IP and Interface NTP Server IP address Once the values are entered press the down arrow to select the "Submit" button and press the right arrow to follow the link.
10	1A: Apply network settings	If the values pass a sanity test for validity, then the "Confirm" button will be visible. Use the down arrow to select "Confirm" and press the right arrow to apply the changes. If the sanity tests failed, the reasons will be stated. Use the left arrow key to go back to the edit screen. The execution could take a few minutes, be patient. The screen will eventually report the status of the completion. If an error occurs, contact ORACLE.

Procedure 16: Single Subnet Configuration

11	1A: Start Node - will make node active and start application	Select Maintenance and press [Enter] Select Start Node and press [Enter] Select Yes to confirm node startup press [Enter] Select Exit and press [Enter] to return to Main Menu Select Exit and press [Enter] to exit the lsmsmgr menu
12	1B: Start lsmsmgr utility by log in as lsmsmgr	[hostname]consolelogin: lsmsmgr password: <i>password</i>
13	1B: Start Node - will make node standby and sync databases.	Select Maintenance and press [Enter] Select Start Node and press [Enter] Select Yes to confirm node startup and press [Enter] Select Exit and press [Enter] to return to Main Menu Select Exit and press [Enter] to exit the lsmsmgr menu

THIS COMPLETES THE SINGLE SUBNET SITE

CONFIGURATION

APPENDIX D. RESTORE CUSTOMIZED MY.CNF FILE**Procedure 17: Restore Customized my.cnf File**

S	This procedure restores the my.cnf file at the customer site.	
T	Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.	
E	IF THIS PROCEDURE FAILS, CONTACT THE ORACLE CUSTOMER CARE CENTER AND ASK FOR ASSISTANCE.	
P	1	E5-APP-B: Login as the user “root”.
		[hostname] consolelogin: root password: <i>password</i>
#	2	E5-APP-B: Verify the my.cnf file.
		Execute the following command to determine if the /var/TKLC/log/upgrade/my.cnf file is present # ls -l /var/TKLC/log/upgrade/my.cnf If the above file is present and its modified time is the time when the upgrade was running, move on to step 3. Otherwise, move on to step 6.
	3	E5-APP-B: Verify the “old-passwords” option
		Execute the following command to determine if the my.cnf file needs to be restored. # grep “old-passwords” /var/TKLC/log/upgrade/my.cnf If the displayed result is “#old-passwords”, move on to step 4. Otherwise, move on to step 6.
	4	E5-APP-B: Restore the my.cnf file
		Use the rcstool to copy over the my.cnf file. # rcstool co /etc/my.cnf # cp /var/TKLC/log/upgrade/my.cnf /etc/ # rcstool ci /etc/my.cnf
	5	E5-APP-B: Restart mysql
		Execute the following commands to restart MySQL. # init 3 # init 4
	6	E5-APP-B: Restore completed
		Go back to the Upgrade Procedure.

APPENDIX E. PID FILE AND STATE FILE CHECKS

E.1 Check for .ugwrap_pid file existence

Procedure 18: Check for existence and remove the ugwrap_pid file

S T E P #	<p>This procedure checks for the existence and removes the .ugwrap_pid file on a single server, prior to upgrade this procedure should be run on both servers 1A and 1B.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>IF THIS PROCEDURE FAILS, CONTACT THE ORACLE CUSTOMER CARE CENTER AND ASK FOR ASSISTANCE.</p>
1 <input type="checkbox"/>	<p>E5-APP-B: Login as the user “root”.</p> <p>[hostname] consolelogin: root password: password</p>
2 <input type="checkbox"/>	<p>E5-APP-B: Determine the existence of the .ugwrap_pid file.</p> <p>Execute the following command to check for the existence of the .ugwrap_pid file:</p> <pre># ls -la /tmp/.ugwrap_pid</pre> <p>If the .ugwrap_pid file does not exist there will be no output from the above command. If the .ugwrap_pid file does exist then the following output will be observed.</p> <pre>-rw-r--r-- 1 root root 4 Jul 24 09:11 .ugwrap_pid</pre> <p>If the file does not exist then you have completed this procedure, please return to the procedure that directed you here. Otherwise, continue to step 3.</p>
3 <input type="checkbox"/>	<p>E5-APP-B: Verify that the ugwrap process is not running.</p> <p>Execute the following command to determine if the ugwrap process is currently running.</p> <pre># ps -ef grep ugwrap grep -v grep</pre> <p>WARNING If there is output to the following command indicating that an ugwrap process is running than an upgrade is in progress and you should cease all command execution and contact Oracle Customer Service immediately.</p> <p>If there is no output to the above command than a ugwrap process is not running, proceed to step 4.</p>
4 <input type="checkbox"/>	<p>E5-APP-B: Remove the .ugwrap_pid file from the server.</p> <p>Execute the following command to remove the .ugwrap_pid file, type “y” when prompted.</p> <pre># rm /tmp/.ugwrap_pid</pre> <pre>rm: remove regular empty file '/tmp/.ugwrap_pid'? y</pre>
5 <input type="checkbox"/>	<p>E5-APP-B: Procedure complete.</p> <p>You have completed this procedure.</p>

E.2 Check for .ugwrap_state file existence

Procedure 19: Check for existence and remove the ugwrap_state file

S T E P #	<p>This procedure checks for the existence and removes the ugwrap_state file on a single server, prior to upgrade this procedure should be run on both servers 1A and 1B.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>IF THIS PROCEDURE FAILS, CONTACT THE ORACLE CUSTOMER CARE CENTER AND ASK FOR ASSISTANCE.</p>	
1 <input type="checkbox"/>	E5-APP-B: Login as the user "root".	<code>[hostname] consolelogin: root</code> password: <i>password</i>
2 <input type="checkbox"/>	E5-APP-B: Determine the existence of the .ugwrap_state file.	<p>Execute the following command to check for the existence of the .ugwrap_state file:</p> <pre># ls -la /var/tmp/.ugwrap_state</pre> <p>If the .ugwrap_state file does not exist there will be no output from the above command. If the .ugwrap_state file does exist then the following output will be observed.</p> <pre>-rw-r--r-- 1 root root 4 Jul 24 09:11 .ugwrap_state</pre> <p>If the file does not exist then you have completed this procedure, please return to the procedure that directed you here. Otherwise, continue to step 3.</p>
3 <input type="checkbox"/>	E5-APP-B: Remove the .ugwrap_state file from the server.	<p>Execute the following command to remove the .ugwrap_state file, type "y" when prompted.</p> <pre># rm /var/tmp/.ugwrap_state</pre> <pre>rm: remove regular empty file '/var/tmp/.ugwrap_state'? y</pre>
4 <input type="checkbox"/>	E5-APP-B: Procedure complete.	<p>You have completed this procedure.</p>

APPENDIX F. STOPPING AN LSMS BACKUP AND VERIFYING THAT LOGICAL VOLUMES AND MOUNT POINTS ARE REMOVED

Procedure 20: Stopping an LSMS backup in progress

Procedure 20: Stopping an LSMS backup in progress

S T E P #	<p>This procedure explains how to terminate an LSMS backup if one is running prior to performing an upgrade. The backup cannot be stopped currently via a stop command or specific signal but will have to be manually terminated. If the user reboots the server prior to executing steps 2-6 that will terminate the backup, but then steps 7-17 should be executed immediately after the reboot to ensure things are properly cleaned up.</p> <p>Note: The user should perform all of the following commands as the LSMS root user. The snapshot is only mounted during the db portion of the backup but this phase will consume the majority of the time required to perform a backup. The snapshot will not be mounted during the platform and logs portion of the backup but terminating it may leave TOC file and backupserver LOCK file cleanup necessary as described in step 11, 13, and 16 below.</p> <p>Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.</p> <p>IF THIS PROCEDURE FAILS, CONTACT THE ORACLE CUSTOMER CARE CENTER AND ASK FOR ASSISTANCE.</p>
1 <input type="checkbox"/>	<p>E5-APP-B: Login as the user “root”.</p> <p>[hostname] consolelogin: root password: <i>password</i></p>
2 <input type="checkbox"/>	<p>E5-APP-B: Determine the PID of the “lsmsbkp” process.</p> <p>Execute the following command to determine if the “lsmsbkp” process is actively running:</p> <pre>[root@lsmsssec ~]# ps -ef grep lsmsbkp grep -v grep root 25938 11126 0 15:08 pts/3 00:00:00 /bin/bash /usr/TKLC/lsms/tools/lsmsbkp_wrapper root 25976 25938 0 15:08 pts/3 00:00:00 /bin/sh /usr/TKLC/lsms/tools/lsmsbkp</pre> <p>If a LSMS backup is in progress the output will show two processes running. Record the PID(process id) of the “lsmsbkp” process and proceed to the next step of this procedure.</p> <p>PID: _____</p> <p>If the above command returns no output then proceed to Step 7 of this procedure to verify that the logical volume does not exist and is not mounted.</p>
3 <input type="checkbox"/>	<p>E5-APP-B: Terminate the “lsmsbkp” process.</p> <p>Execute the following command to terminate the “lsmsbkp” process:</p> <pre>[root@lsmsssec ~]# kill -9 <lsmsbkp PID></pre>
4 <input type="checkbox"/>	<p>E5-APP-B: Monitor the “lsmsbkp_wrapper” process until it terminates.</p> <p>After the lsmsbkp process is terminated the lsmsbkp_wrapper should also terminate, Execute the following command to monitor this until no output is displayed.</p> <pre>[root@lsmsssec ~]# ps -ef grep lsmsbkp_wrapper grep -v grep</pre> <p>If after several minutes the “lsmsbkp_wrapper” process does not terminate then it can be terminated using the method described previously in step 3 this time for the “lsmsbkp_wrapper” process.</p>
5 <input type="checkbox"/>	<p>E5-APP-B: Check the “netbackup” process</p> <p>Most likely the backup will be terminated during the database phase of the backup as this is the longest running phase. We need to check for and terminate the netbackup routine which is actually doing the work:</p> <p>Execute the following command to determine if the “netbackup” process is actively</p>

Procedure 20: Stopping an LSMS backup in progress

		running: [root@lsmsssec mnt]# ps -ef grep netbackup grep -v grep root 14937 13435 5 15:35 pts/3 00:00:00 /usr/bin/perl -T /usr/TKLC/plat/bin/netbackup -- config=/usr/TKLC/plat/etc/BackupTK/lsmldb.xml --repository=db
6	E5-APP-B: Terminate the “netbackup” process.	Execute the following command to terminate the “netbackup” process: [root@lsmsssec mnt]# kill -9 <netbackup PID>
7	E5-APP-B: Verify the mount point for the backup snapshot exists.	Execute the following command to verify that the dbbackup logical volume is mounted at the mount point /mnt/backup/var/TKLC/lsmldb : [root@lsmsssec ~]# df -h Filesystem Size Used Avail Use% Mounted on /dev/md2 494M 171M 298M 37% / /dev/md1 251M 18M 221M 8% /boot none 4.0G 0 4.0G 0% /dev/shm /dev/md6 1012M 34M 927M 4% /tmp /dev/md5 4.0G 1.7G 2.2G 43% /usr /dev/md7 494M 185M 284M 40% /var /dev/md8 4.0G 2.3G 1.5G 61% /var/TKLC /dev/md9 494M 11M 458M 3% /var/TKLC/recovery /dev/md10 4.0G 41M 3.7G 2% /var/TKLC/recovery/usr /dev/md11 15G 70M 15G 1% /var/TKLC/swap /dev/mapper/vgroot-lsmldb--root 4.0G 138M 3.7G 4% /var/TKLC/lsmldb /dev/mapper/vgroot-lsmldb 82G 1.2G 77G 2% /var/TKLC/lsmldb /dev/mapper/vgroot-lsmldb-external 2.0G 68M 1.9G 4% /var/TKLC/lsmldb-external /dev/mapper/vgroot-lsmldb-free 52G 182M 49G 1% /var/TKLC/lsmldb-free /dev/mapper/vgroot-lsmldb-logs 36G 196M 34G 1% /var/TKLC/lsmldb-logs /dev/mapper/vgroot-dbbackup 82G 1.2G 77G 2% /mnt/backup/var/TKLC/lsmldb If /mnt/backup/var/TKLC/lsmldb is not mounted proceed to Step 9 of this procedure.
8	E5-APP-B: Umount the mount point for the backup snapshot.	Execute the following command to un-mount the mount point for the snapshot: [root@lsmsssec mnt]# umount /mnt/backup/var/TKLC/lsmldb Execute the following command to verify that the mount point for the snapshot has been unmounted. The commands output will look like the following when mount point for the snapshot has been unmounted: [root@lsmsssec ~]# df -h Filesystem Size Used Avail Use% Mounted on /dev/md2 494M 171M 298M 37% / /dev/md1 251M 18M 221M 8% /boot none 4.0G 0 4.0G 0% /dev/shm /dev/md6 1012M 34M 927M 4% /tmp /dev/md5 4.0G 1.7G 2.2G 43% /usr /dev/md7 494M 185M 284M 40% /var /dev/md8 4.0G 2.3G 1.5G 61% /var/TKLC /dev/md9 494M 11M 458M 3% /var/TKLC/recovery /dev/md10 4.0G 41M 3.7G 2% /var/TKLC/recovery/usr /dev/md11 15G 70M 15G 1% /var/TKLC/swap /dev/mapper/vgroot-lsmldb--root

Procedure 20: Stopping an LSMS backup in progress

	<pre>4.0G 138M 3.7G 4% /var/TKLC/lsms /dev/mapper/vgroot-lsms--db 82G 1.2G 77G 2% /var/TKLC/lsms/db /dev/mapper/vgroot-lsms--external 2.0G 68M 1.9G 4% /var/TKLC/lsms/external /dev/mapper/vgroot-lsms--free 52G 182M 49G 1% /var/TKLC/lsms/free /dev/mapper/vgroot-lsms--logs 36G 196M 34G 1% /var/TKLC/lsms/logs</pre>
9	<p>E5-APP-B: Verify that the dbbackup logical volume exists.</p> <p>Execute the following command to verify that the backup snapshot logical volume exists:</p> <pre>[root@lsmssec ~]# lvdisplay --- Logical volume --- LV Name /dev/vgroot/lsms-root . (output omitted) . --- Logical volume --- LV Name /dev/vgroot/lsms-db . (output omitted) . --- Logical volume --- LV Name /dev/vgroot/lsms-external . (output omitted) . --- Logical volume --- LV Name /dev/vgroot/lsms-free . (output omitted) . --- Logical volume --- LV Name /dev/vgroot/lsms-logs . (output omitted) --- Logical volume --- LV Name /dev/vgroot/dbbackup VG Name vgroot LV UUID DFmRiq-00sz-o3bZ-M2mB-huaD-EE7M-KH3mOF LV Write Access read/write LV snapshot status active destination for /dev/vgroot/lsms-db LV Status available # open 1 LV Size 83.00 GB Current LE 2656 COW-table size 8.00 GB COW-table LE 256 Allocated to snapshot 0.00% Snapshot chunk size 8.00 KB Segments 1 Allocation inherit Read ahead sectors 0 Block device 253:5</pre> <p>If the logical volume /dev/vgroot/dbbackup does not exist proceed to Step 11 of this procedure.</p>
10	<p>E5-APP-B: Remove the dbbackup logical volume using lvremove.</p> <p>Execute the following command to remove the /dev/vgroot/dbbackup logical volume:</p> <pre>[root@lsmssec mnt]# lvremove /dev/vgroot/dbbackup</pre> <p>Do you really want to remove active logical volume</p>

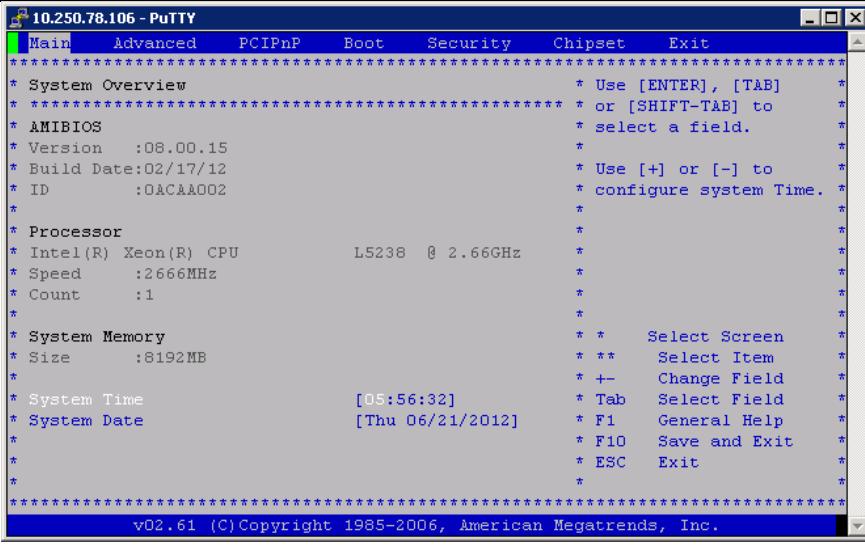
Procedure 20: Stopping an LSMS backup in progress

	<p>"dbbackup"? [y/n]: y</p> <p>Logical volume "dbbackup" successfully removed</p> <p>Execute the following command to verify that the logical volume has been removed. The commands output will look like the following when the snapshot lv have been removed:</p> <pre>[root@lsmssec ~]# lvdisplay --- Logical volume --- LV Name /dev/vgroot/lsms-root . (output omitted) --- Logical volume --- LV Name /dev/vgroot/lsms-db . (output omitted) --- Logical volume --- LV Name /dev/vgroot/lsms-external . (output omitted) --- Logical volume --- LV Name /dev/vgroot/lsms-free . (output omitted) --- Logical volume --- LV Name /dev/vgroot/lsms-logs . (output omitted)</pre>
11	<p>E5-APP-B: Verify the existence of a TOC file in the "/mnt/backup" directory.</p> <p>Execute the following command to change directory to "/mnt/backup":</p> <pre>[root@lsmssec mnt]# cd /mnt/backup</pre> <p>Execute the following command to verify the existence of a TOC (Table Of Contents) file exists in "/mnt/backup";</p> <pre>[root@lsmssec backup]# ls TOC var</pre> <p>Note: If no TOC file exists proceed to the Step 13 of this procedure.</p>
12	<p>E5-APP-B: Remove the TOC file in the "/mnt/backup" directory.</p> <p>Execute the following command to remove the TOC file in "/mnt/backup":</p> <pre>[root@lsmssec backup]# rm TOC rm: remove regular file `TOC'? y</pre>
13	<p>E5-APP-B: Verify the existence of a TOC file in the "/" directory.</p> <p>Execute the following command to change directory to "/":</p> <pre>[root@lsmssec backup]# cd /</pre> <p>Execute the following command to verify the existence of a TOC (Table Of Contents) file exists in "/";</p> <pre>[root@lsmssec backup]# ls bin etc lib misc proc selinux tftpboot us r</pre>

Procedure 20: Stopping an LSMS backup in progress

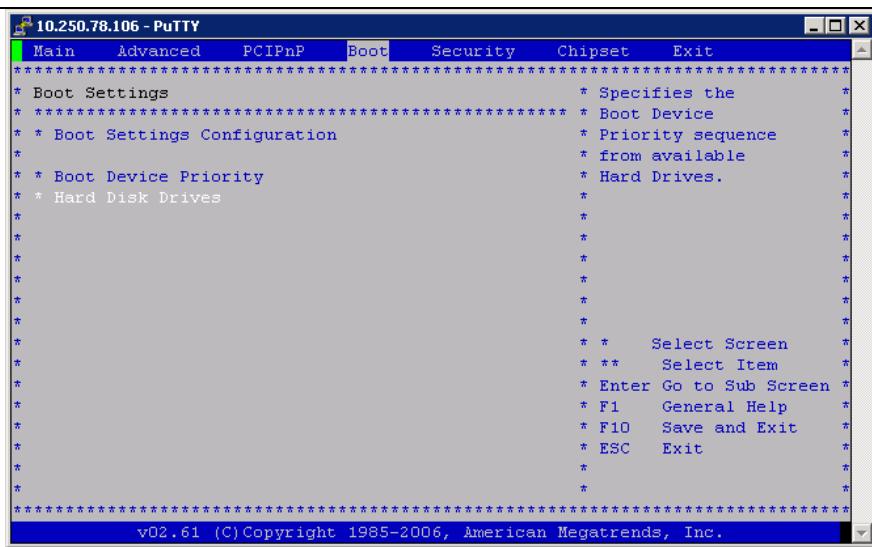
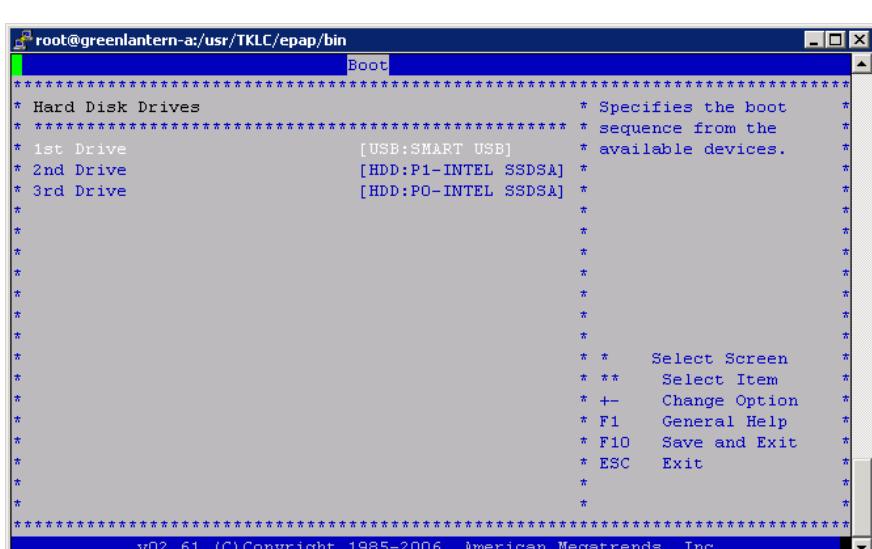
		boot home lost+found mnt root srv tmp va r dev initrd media opt sbin sys TOC
		Note: If no TOC file exists proceed to the Step 15 of this procedure.
14	E5-APP-B: Remove the TOC file in the "/" directory.	Execute the following command to remove the TOC file in "/mnt/backup": [root@lsmssec backup]# rm TOC rm: remove regular file `/TOC'? y
15	E5-APP-B: SSH to the backup server.	Execute the following command to SSH to the NAS: [root@lsmssec backup]# ssh backupserver
16	E5-APP-B: Verify the existence of any LOCK.* files in the "/Volumes/LVstorage" directory on the NAS.	On the NAS execute the following command to change directory to "/Volumes/LVstorage": [root@CE64CDAE root]# cd /volumes/LVstorage Execute the following command to verify the existence of a LOCK file exists in "/Volumes/LVstorage": [root@CE64CDAE LVstorage]# ls db LOCK.db logs_lsmspri logs_lsmssec lsmspri lsmssec Note: In this example a db directory LOCK file exists, but it is possible for a lock file to exist for any of the five directories listed: LOCK.db, LOCK.logs_lsmspri, LOCK.logs_lsmssec, LOCK.lsmspri, and/or LOCK.lsmssec Note: If no LOCK file exists proceed to Step 18 of this procedure.
17	E5-APP-B: Remove any LOCK.* files in the "/Volumes/LVstorage" directory on the NAS.	Execute the following command to remove the LOCK.* files in "/Volumes/LVstorage": [root@CE64CDAE LVstorage]# rm LOCK.db rm: remove regular file `LOCK.db'? y Note: In the following example a db directory LOCK file is being removed, it is possible for a lock file to exist for any of the five directories listed.
18	E5-APP-B: Procedure complete.	You have completed this procedure; please return to the procedure that directed you here.

APPENDIX G. IPM E5-APP-B SERVER WITH TPD 5.5.1**Note: Both the NAS and LSMS 1A/1B servers can be IPMed at the same time.****Note: NAS should be IPMed with 64 bit version of TPD 5.5.1 and LSMS should be IPMed with 32 bit version of TPD 5.5.1.****Procedure 21: IPM with TPD 5.5.1**

S	This procedure will remove the LSMS application and all the data from the server.	
T	Check off (✓) each step as it is completed. Boxes have been provided for this purpose under each step number.	
E	IF THIS PROCEDURE FAILS, CONTACT ORACLE TECHNICAL SERVICES AND ASK FOR UPGRADE ASSISTANCE .	
P		
#		
1. <input type="checkbox"/>	E5-APP-B X: Insert TPD 5.5.1 USB media into the USB port	
2. <input type="checkbox"/>	E5-APP-B X: If necessary, log in to the server as the user "root" console login: root password: <root_password>	If not already logged in to the E5-APP-B server, then login as user "root".
3. <input type="checkbox"/>	E5-APP-B X: Reboot server	# reboot
4. <input type="checkbox"/>	E5-APP-B X: Press 'del' key to enter the BIOS	
5. <input type="checkbox"/>	E5-APP-B X: Set System Time and Date	Set the System Time and Date and time to GMT (Greenwich Mean Time).
6. <input type="checkbox"/>	E5-APP-B X: Select <i>Boot → Hard Disk Drives</i> option	

Upgrade/Installation Guide

Procedure 21: IPM with TPD 5.5.1

	
7. <input type="checkbox"/> E5-APP-B X: Press 'Enter' key and select USB as the 1 st Drive	
8. <input type="checkbox"/> E5-APP-B X: Press 'Esc' key and select Boot Device Priority	

Upgrade/Installation Guide

Procedure 21: IPM with TPD 5.5.1

9. <input type="checkbox"/>	<p>E5-APP-B X:</p> <p>Verify that the 1st Boot Device is set to USB.</p>
10. <input type="checkbox"/>	<p>E5-APP-B X:</p> <p>Press 'Esc' key and select <i>Exit</i> → <i>Save Changes and Exit</i> option</p>

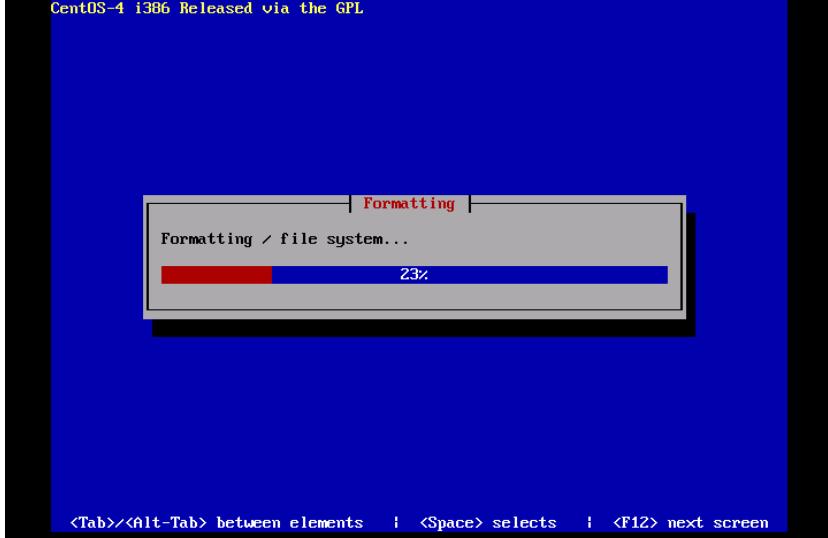
Upgrade/Installation Guide

Procedure 21: IPM with TPD 5.5.1

11.	<p><input type="checkbox"/> E5-APP-B X: Select [OK] to save the configuration changes.</p> <p>The server will reboot and TPD boot prompt will appear.</p>	
12.	<p><input type="checkbox"/> E5-APP-B X: Start the IPM process by entering the TPD command at the boot prompt.</p>	boot: TPD scrub
13.	<p><input type="checkbox"/> E5-APP-B X: After entering the command to start the installation, the Linux kernel will load, as in the screenshot at right.</p>	

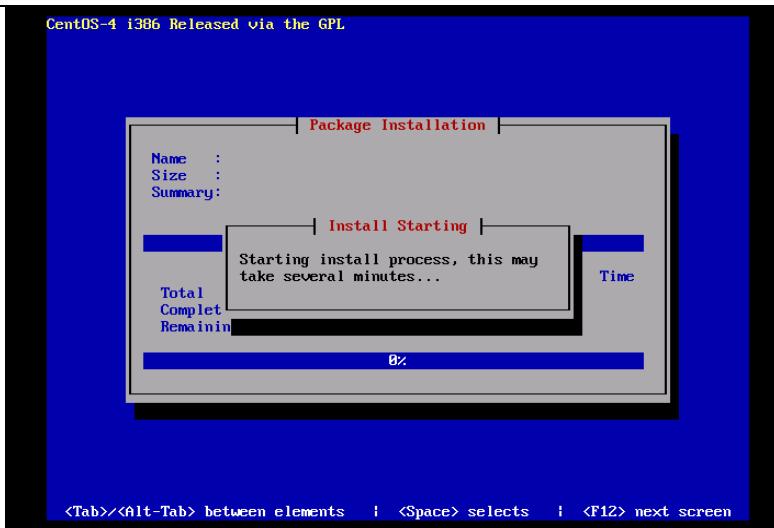
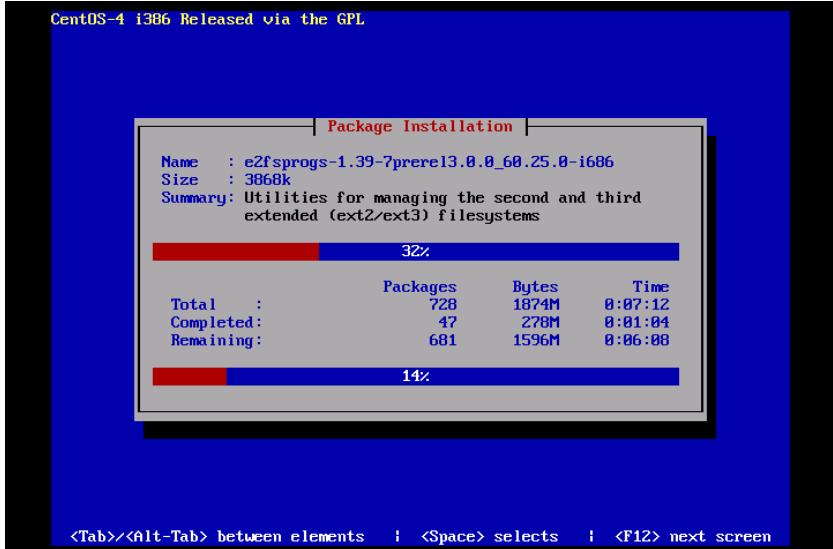
Upgrade/Installation Guide

Procedure 21: IPM with TPD 5.5.1

	<pre>- To install with software RAID, type: TPD - To install on first device found, type: TPDnoraid - To install using the minimum disk space, type: TPDcompact - To install to one disk with blade partition config, type: TPDblade - To enable rescue mode, type: rescue * To install using a monitor and local keyboard, add: console=tty0 * To create partitions (and RAID devices, if appropriate) that are not used by the platform or included in the vroot volume group, use the reserved option. E.g. to reserve 64MB and 1GB devices, add: reserved=64M,1G * To limit the installation to certain drive(s), use the drives option. E.g. to install to the 1st and 3rd SCSI drives, add: drives=sda,sdc boot: TPD scrub Loading vmlinuz..... Loading initrd.img..... Ready. Uncompressing Linux... Ok, booting the kernel.</pre>
14. <input type="checkbox"/>	<p>E5-APP-B X:</p> <p>After a few seconds, additional messages will begin scrolling by on the screen as the Linux kernel boots, and then the drive formatting and file system creation steps will begin.</p>
15. <input type="checkbox"/>	<p>E5-APP-B X:</p> <p>Once the drive formatting and file system creation steps are complete, the screen at right will appear indicating that the package installation step is about to begin.</p> 

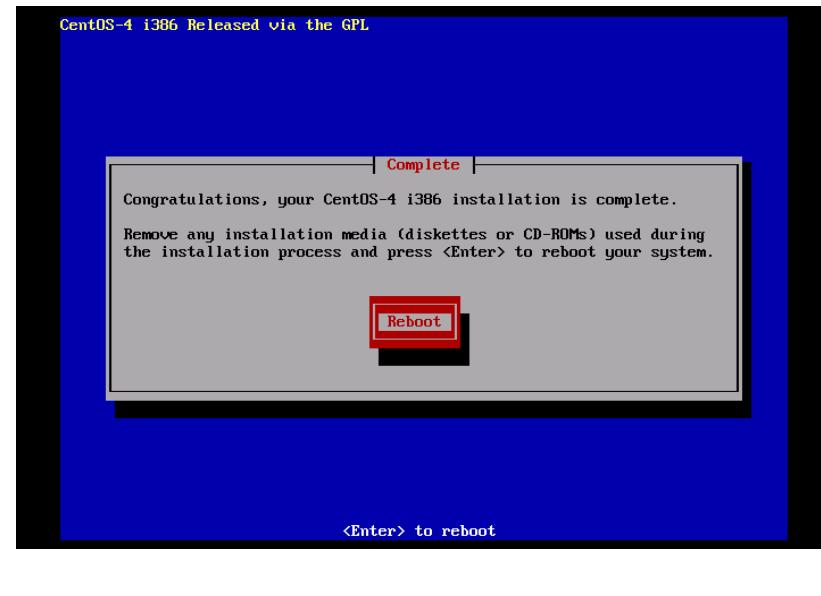
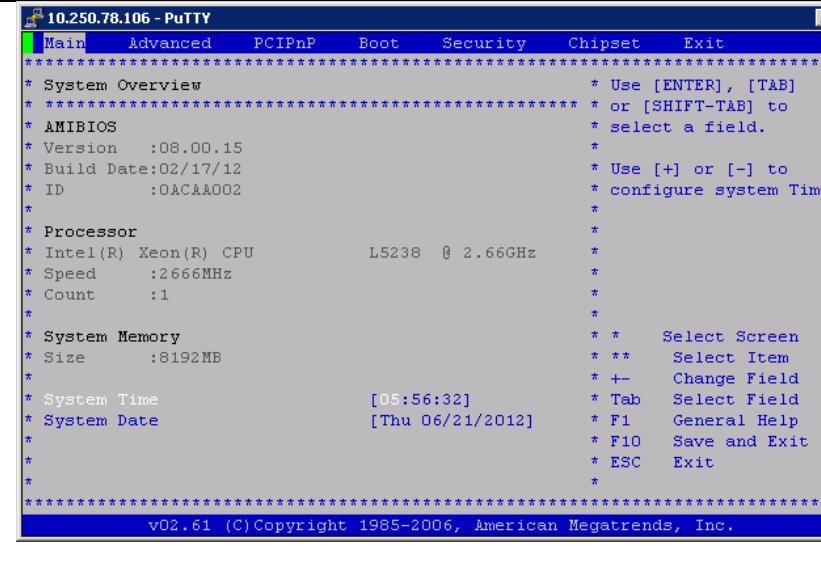
Upgrade/Installation Guide

Procedure 21: IPM with TPD 5.5.1

	 <p>CentOS-4 i386 Released via the GPL</p> <p>Package Installation</p> <p>Name : Size : Summary:</p> <p>Install Starting</p> <p>Starting install process, this may take several minutes...</p> <p>Total Complet Remaining Time</p> <p>0%</p> <p><Tab>/<Alt-Tab> between elements <Space> selects <F12> next screen</p>																
16. <input type="checkbox"/> E5-APP-B X:	 <p>CentOS-4 i386 Released via the GPL</p> <p>Package Installation</p> <p>Name : e2fsprogs-1.39-7prere13.0.0_60.25.0-1686 Size : 3868k Summary: Utilities for managing the second and third extended (ext2/ext3) filesystems</p> <p>32%</p> <table><thead><tr><th></th><th>Packages</th><th>Bytes</th><th>Time</th></tr></thead><tbody><tr><td>Total :</td><td>728</td><td>1874M</td><td>0:07:12</td></tr><tr><td>Completed:</td><td>47</td><td>278M</td><td>0:01:04</td></tr><tr><td>Remaining:</td><td>681</td><td>1596M</td><td>0:06:08</td></tr></tbody></table> <p>14%</p> <p><Tab>/<Alt-Tab> between elements <Space> selects <F12> next screen</p>		Packages	Bytes	Time	Total :	728	1874M	0:07:12	Completed:	47	278M	0:01:04	Remaining:	681	1596M	0:06:08
	Packages	Bytes	Time														
Total :	728	1874M	0:07:12														
Completed:	47	278M	0:01:04														
Remaining:	681	1596M	0:06:08														
17. <input type="checkbox"/> E5-APP-B X:	Once all the packages have been successfully installed, the screen at right will appear letting you know the installation process is complete.																

Upgrade/Installation Guide

Procedure 21: IPM with TPD 5.5.1

<p>Remove the installation media (USB) and press <ENTER> to reboot the system and continue with the next step.</p>	
<p>18. <input type="checkbox"/> E5-APP-B X: Press 'del' key to enter the BIOS</p>	
<p>19. <input type="checkbox"/> E5-APP-B X: Select <i>Boot</i> → <i>Hard Disk Drives</i> option</p>	

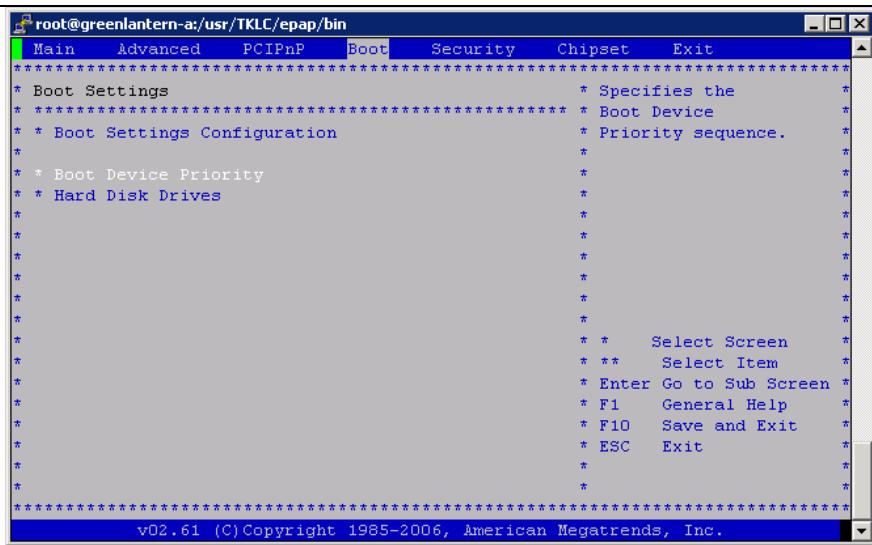
Upgrade/Installation Guide

Procedure 21: IPM with TPD 5.5.1

20. <input type="checkbox"/> E5-APP-B X: Press 'Enter' key and select HDD:P0 as the 1 st Drive	
21. <input type="checkbox"/> E5-APP-B X: Press 'Esc' key and select Boot Device Priority	

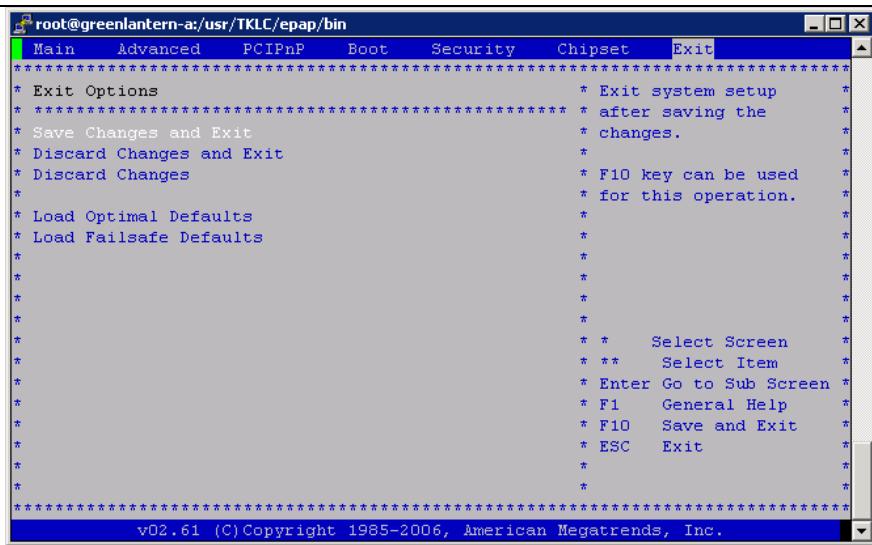
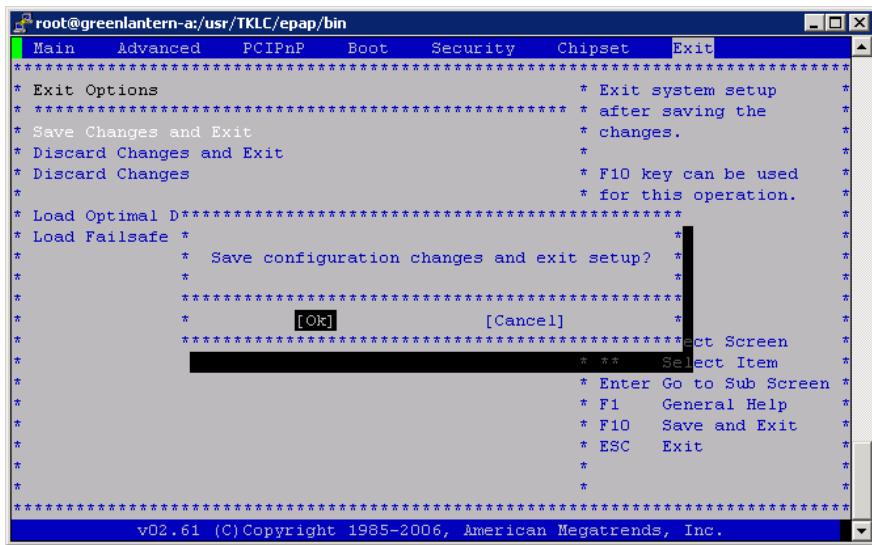
Upgrade/Installation Guide

Procedure 21: IPM with TPD 5.5.1

	
22. <input type="checkbox"/>	<p>E5-APP-B X:</p> <p>Verify that the 1st Boot Device is set to HDD:P0.</p>
23. <input type="checkbox"/>	<p>E5-APP-B X:</p> <p>Press 'Esc' key and select <i>Exit</i> → <i>Save Changes and Exit</i> option</p>

Upgrade/Installation Guide

Procedure 21: IPM with TPD 5.5.1

		
24.	<p>E5-APP-B X:</p> <p><input type="checkbox"/> Select [OK] to save the configuration changes. The server will reboot.</p> <p>Remove USB media from USB drive.</p>	
25.	<p>E5-APP-B X:</p> <p><input type="checkbox"/> After a few minutes, several messages will appear about each of the Ethernet ports in the system, and message printed by the boot loader, indicating that it is booting the new IPM load.</p>	
26.	<p>E5-APP-B X: Log in to the server as the user</p>	console login: root password: <root_password>

Upgrade/Installation Guide

Procedure 21: IPM with TPD 5.5.1

	“root”	
27. <input type="checkbox"/>	E5-APP-B X: Verify that the platform revision is same as the ISO used.	# getPlatRev 5.5.1-75.x.0
28. <input type="checkbox"/>	Procedure complete.	Return to the procedure that you came here from.

APPENDIX H. LOCATE PRODUCT DOCUMENTATION ON THE CUSTOMER SUPPORT SITE

Access to Oracle's Customer Support area is restricted to current Oracle customers only. This section describes how to log into the Oracle Customer Support site and locate a document. Viewing the document requires Adobe Acrobat Reader.

1. Log into the Oracle Customer Support site at <http://support.tekelec.com>. **Note:** If you have not registered for this site, click the **Register Here** link. Have your customer number available. The response time for registration requests is 24 to 48 hours.
2. Click the **Product Support** tab.
3. Use the Search field to locate a document by its part number, release number, document name, or document type. The Search field accepts both full and partial entries.
4. Click a subject folder to browse through a list of related files.
5. To download a file to your location, right-click the file name and select **SaveTarget As**.