

Agile

Enterprise Integration Platform

ORACLE

Development Manual

Enterprise Integration Platform 2.1.2
SAP-Link 4.1.2

Part No. E11174-01

Make sure you check for updates to this manual at the
Oracle Technology Network Website

Copyright © 2002, 2007 Oracle. All rights reserved.

The Programs (which include both the software and documentation) contain proprietary information; they are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright, patent, and other intellectual and industrial property laws. Reverse engineering, disassembly, or decompilation of the Programs, except to the extent required to obtain interoperability with other independently created software or as specified by law, is prohibited.

The information contained in this document is subject to change without notice. If you find any problems in the documentation, please report them to us in writing. This document is not warranted to be error-free. Except as may be expressly permitted in your license agreement for these Programs, no part of these Programs may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose.

If the Programs are delivered to the United States Government or anyone licensing or using the Programs on behalf of the United States Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS

Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the Programs, including documentation and technical data, shall be subject to the licensing restrictions set forth in the applicable Oracle license agreement, and, to the extent applicable, the additional rights set forth in FAR 52.227-19, Commercial Computer Software--Restricted Rights (June 1987). Oracle USA, Inc., 500 Oracle Parkway, Redwood City, CA 94065.

The Programs are not intended for use in any nuclear, aviation, mass transit, medical, or other inherently dangerous applications. It shall be the licensee's responsibility to take all appropriate fail-safe, backup, redundancy and other measures to ensure the safe use of such applications if the Programs are used for such purposes, and we disclaim liability for any damages caused by such use of the Programs.

The Programs may provide links to Web sites and access to content, products, and services from third parties. Oracle is not responsible for the availability of, or any content provided on, third-party Web sites. You bear all risks associated with the use of such content. If you choose to purchase any products or services from a third party, the relationship is directly between you and the third party. Oracle is not responsible for: (a) the quality of third-party products or services; or (b) fulfilling any of the terms of the agreement with the third party, including delivery of products or services and warranty obligations related to purchased products or services. Oracle is not responsible for any loss or damage of any sort that you may incur from dealing with any third party.

Oracle is a registered trademark of Oracle Corporation. Other names may be trademarks of their respective owners.

December 03, 2007

PREFACE

The Agile documentation set includes Adobe® Acrobat™ PDF files. The Oracle Technology Network (OTN) Web site (<http://www.oracle.com/technology/documentation/index.html>) contains the latest versions of the Oracle|Agile PLM PDF files. You can view or download these manuals from the Web site, or you can ask your Agile administrator if there is an Oracle|Agile Documentation folder available on your network from which you can access the Oracle| Agile documentation (PDF) files.

Note To read the PDF files, you must use the free Adobe Acrobat Reader™ version 7.0 or later. This program can be downloaded from the Adobe Web site (<http://www.adobe.com>).

The Oracle Technology Network (OTN) Web site (<http://www.oracle.com/technology/documentation/index.html>) can be accessed through **Help > Manuals** in both the Agile Web Client and the Agile Java Client. If applicable, earlier versions of Oracle|Agile PLM documentation can be found on the Agile Customer Support Web site (<http://www.agile.com/support>).

If you need additional assistance or information, please contact support@agile.com or phone (408) 284-3900 for assistance.

Note Before calling Agile Support about a problem with an Oracle|Agile PLM manual, please have ready the full part number, which is located on the title page.

Readme

Any last-minute information about Oracle|Agile PLM can be found in the Readme file on the Oracle Technology Network (OTN) Web site (<http://www.oracle.com/technology/documentation/index.html>).

Agile Training Aids


Go to the Agile Training Web page (<http://training.agile.com>) for more information on Agile Training offerings.

Chapter 1	Overview	1
Chapter 2	Introduction	3
	Connectors.....	3
	Web Services.....	3
Chapter 3	Connectors	5
	Configuration	5
	Implementation.....	6
	Connector Types	6
	Connector Modes.....	7
	Connector Methods	7
	Thread Safety	9
Chapter 4	WebServices	11
	Implementation.....	11
	Configuration	11
	Deployment	11
Chapter 5	Additional Documentation	13

Chapter 1

Overview

The Enterprise Integration Platform is a framework based on an EAI architecture (Enterprise Application Integration) for connecting Agile e6 with other applications and systems. The Integration Platform consists of several components like the Agile e6 connector, SAP R/3 connector, business process engine, mapping engine and message queue.

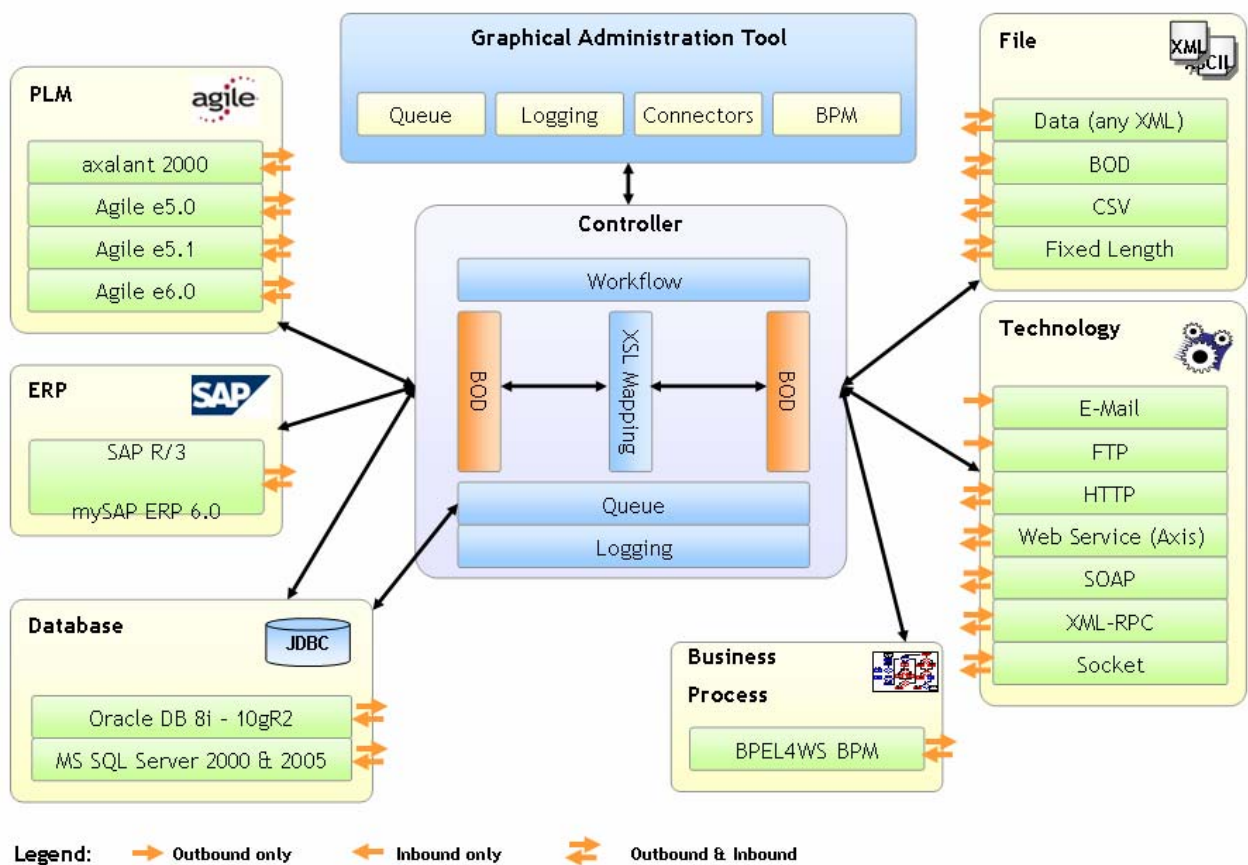

Chapter 2

Introduction

This manual should enable software developers both to implement own connectors for the Enterprise Integration Platform and to implement own web services for the WebServiceConnector.

Connectors

Implementing an additional connector consists of the following steps:

- ❑ Provide the application specific configuration parameters in the configuration XML file, e.g. how to connect to the application (login, password, etc.).
- ❑ Develop the connector itself, which will be called by the Enterprise Integration Platform controller (kernel) e.g. based on events. The connector either receives data from the Controller in order to send data (or to execute a function) in the external application or reads data from the external application and sends it to the controller for further processing.

Web Services

Implementing an additional Web Service consists of the following steps:

- ❑ Provide the web service specific configuration parameters in the configuration XML file, e.g. how your web service can be called from a web service client.
- ❑ Develop the web service itself that allows web service calls to be made.
- ❑ Provide web service deployment information to get it properly deployed inside the EIP's web server.

Chapter 3

Connectors

Configuration

The configuration file is based on XML. Upon the startup of the Enterprise Integration Platform, the controller reads the configuration file in order to know which connectors need to be started etc.

The configuration data is converted into an internal XML Data Object (XDO), which the controller provides to each connector. The connector itself is responsible for pulling the connector-specific information out of the configuration XDO.

Below is an example of the minimum configuration for a connector. The tags “name”, “version”, “class” and “active” are required.

```
<connector name="example" version="2.1.0" active="false" class="com.eigner.eai.connector.ExampleConnector">
</connector>
```

In detail, adding a connector would require to add a section for this specific connector. It depends on the functionality of the connector, what information needs to be provided e.g. connection parameters or available functions of the interface. It is recommended to put all connection related parameters under a connection tag that can be accessed easily from within the connector’s source code.

```
<connector name="plm" version="2.1.0" active="true" class="com.eigner.eai.connector.plm.PlmConnector">
...
<connection name="default" active="true">
  <host>plm_server</host>
  <socket>16067</socket>
  <env>axalantORIGIN</env>
  <user>EDB-EIP</user>
  <pwd>TjmFyaW6eWs</pwd>
  <id>"</id>
  <connection-timeout>300000</connection-timeout>
  <call-timeout>300000</call-timeout>
</connection>
...
</connector>
```

The connector also needs to be defined either as source or target connector in the workflow area. This describes the initial direction of the data transfer:

```
<workflow name="plm-sap" active="true" type="asynchronous">
  <source>plm</source>
  <target>sap-r3</target>
  <request-pipe>plm-r3</request-pipe>
  <response-pipe>r3-plm</response-pipe>
</workflow>
```

The name and path of the mapping file (XSL) must also be provided. The mapping file is responsible for converting the XDO data from the source system format to the target system format.

```
<pipe name="plm-r3">  
  <path>${eai.conf}/plm_r3.xsl</path>  
</pipe>
```

Implementation

The connector itself is a Java class, which must provide (extend) certain methods like `init`, `warmup`, `start`, `stop`, and `release` from the connector interface (see JavaDoc for package `com.eigner.eai.connector`).

Connector Types

There are two types of connectors: synchronous and asynchronous. The most common one is the asynchronous connector.

To determine which type of connector to develop, the modes of operation are important.

- ❑ The asynchronous connector is used to gather data from its system if it is the source connector. The data is stored into an internal queue inside the EIP by the controller and the source connector is done for now and waits for the next transfer order. The controller then reads the data from this queue and sends them to the target connector. The target connector processes the data and sends them back to the controller, which stores them into the queue again. The data is then read by controller and sent back to the source connector.
- ❑ The synchronous connector is used to gather data from its system, sends them in synchronous mode through the controller to the target connector, and waits for the results to send them to its system.

Depending on its purpose the connector must implement either the `AsyncConnector` interface (methods `sendToController` and `receiveFromController`) or the `SyncConnector` interface (method `process`). For convenience reasons, there are the abstract class `AbstractConnector`, `AbstractAsyncConnector`, and `AbstractSyncConnector` (also available from the package `com.eigner.eai.connector`).

Asynchronous Connector

An asynchronous connector usually reads the data from its system when the controller is requesting them (`sendToController`). This data is stored in an EIP internal queue, and the connector is able to process further requests. When results are returned, the controller triggers the connector by calling its `receiveFromController` method.

An asynchronous connector must inherit from the `com.eigner.eai.connector.AsyncConnector` interface. There is also an abstract base class `AbstractAsyncConnector`, which is recommended to be used since it already implements most of the basic methods.

Note: For an example please refer to the file `ExampleAsyncConnector.java` in the docs directory.

Synchronous Connector

A synchronous connector is mostly triggered by its system, usually reads the needed data, sends them to the controller (via the connector's "process" method) and waits for the results.

A synchronous connector must inherit from the `com.eigner.connector.SyncConnector` interface. There is also an abstract base class `AbstractSyncConnector`, which is recommended to be used since it already implements most of the basic methods.

Note: For an example please refer to the file `ExampleSyncConnector.java` in the docs directory.

Connector Data

The vehicle to transfer the data from controller to connector and back is a BusinessObject (BO) or a part of the BO (see JavaDoc for package `com.eigner.common.businessobject`). The BO is based on a XDO (XML Data Object, see JavaDoc for package `com.eigner.common.dataobject`), and consists of a control area (that is maintained by the controller) and a data area that holds the data for the connector. For further information on the structure of a BO, please refer to the Administrator Manual.

Connector Modes

A connector should support at least one of the two possible modes: source mode (`MODE_SOURCE`) or target mode (`MODE_TARGET`).

Source mode means that the connector can act as a data source. It may then be used as a source in a workflow definition or in a receive activity inside a BPM process.

Target mode means that the connector can act as a data target. It may then be used as a target in a workflow definition or in an “invoke” or “reply” activity inside a BPM process.

As a convenience, there is also a mode `MODE_BOTH` for connectors that support both.

The mode has to be returned by the connector’s `getMode()` method.

As a conclusion, a connector that supports `MODE_SOURCE` has to implement the `sendToController()` method. Whereas a connector that supports `MODE_TARGET` has to implement the `receiveFromController()` method.

Connector Methods

We will discuss the single connector methods now in more detail.

It is assumed that there is already a custom connector class that has been derived properly from one of the abstract base classes.

The constructor and the `init` method will only be called if the connector’s configuration is set active in the `eai_ini.xml`.

Constructor

```
public ExampleSyncConnector()
```

The constructor must be a default constructor (without any arguments). It must call the super constructor with the connector’s class name, which will be used by the logging framework. You will have access to the logger inside the connector’s source code by calling the method `getLogger()`. Please refer to the JavaDoc of the package `com.eigner.common.logging` for further information.

It must then call the `setVersion()` method with a version number string (e.g. “2.0.0”) that must be the same as the one defined in the connector’s configuration inside the `eai_ini.xml`. It should be the same as the current EIP version. The controller uses these version numbers to determine if a configuration is compliant with the connector.

The version numbering consists of three numbers where the first one is the major version, the second one is the minor version and the last one is the revision version. It is required that a connector that differs only by the revision number should read its configuration of a lesser or equal revision number (e.g. a connector with version 2.0.1 should read a configuration for version 2.0.0). This is not required if the versions differ on the major or minor version.

init()

```
public void init(ControllerInstance controller, String connectorName)
```

The controller calls this method after the constructor is called. There the connector's class members should be initialized as well as third party APIs (if any is needed to communicate with the external system).

It is required to call the super init method before all other code. Then you should read in the connector's connection configuration by calling the controller's getConnectionContext() method. For further processing of the returned element object, please refer to the JavaDoc of package com.eigner.commons.dataobject.

Each connector may have a BOR (Business Object Repository) assigned if needed that defines the calls into the external system depending on the direction (e.g. "SEND"), the business object (e.g. "BOM") and a verb (e.g. "RELEASE"). Since this BOR is highly dependent on the external system, no general advice can be given here. The BOR can be accessed inside the source code by calling the controller's getBorContext() method. The further processing of the returned element object is equivalent to the one returned by getConnectionContext().

Then you may call the third party's API as needed to initialize it.

warmup()

```
public void warmup() throws ConnectorException
```

The controller calls this method after method init() and before method start(). This allows you to do further initialization that depends on a fully initialized connector before it is started. It is mostly sufficient to not overwrite this method but to use the base class' default implementation.

start()

```
public void start() throws ConnectorException
```

The controller calls this method when the connector should connect to its system. This is only done when the dynamic-connect feature is not activated or the connector is a source connector as defined in the workflows.

The dynamic-connect feature is an optional configuration tag for the connector inside the eai_ini.xml. For further information, please refer to the Administrator Manual.

sendToController()

```
public boolean sendToController() throws ConnectorException, UnavailableException
```

The controller calls this method periodically if the connector is derived from AsyncConnector. The interval is defined in the controller's configuration via the parameter polling-interval inside the eai_ini.xml.

This method should read data from the external system, construct a DataArea with these data and send it to the controller. If a connection problem occurs when reading the data from the system, a UnavailableException should be thrown. If another error occurs, a ConnectorException should be thrown.

The method should return the value "true", if the controller's send() method had been called. Otherwise, the value "false" should be returned.

receiveFromController()

```
public boolean receiveFromController(BusinessObject bo) throws ConnectorException, UnavailableException
```

The controller calls this method when the controller has data that should be delivered to the connector in asynchronous mode. The connector may query the BO's control area, to determine the type of the BO (e.g. isResponse() for data sent by another connector or previously sent data via its own sendToController() method), or an error state (by calling hasError()).

This method may write data to the external system, construct a ReturnArea with this status information and send it to the controller. If a connection problem occurs when writing the data to the system, an UnavailableException should be thrown. If another error occurs, a ConnectorException should be thrown.

The method should return the value “true”, if the controller’s send() method had been called. Otherwise, the value “false” should be returned.

process()

```
public BusinessObject process(String id) throws ConnectorException, UnavailableException
public BusinessObject process(Collection params) throws ConnectorException, UnavailableException
```

The external system may call these methods when it wants to have data transferred in synchronous mode. Depending on the third party API, you may also have your own class that calls directly the controller’s process() method.

The first method takes a GUID string that is used to identify and read the data from the external system.

The second method gets all the required parameters that are needed to process the synchronous request. The connector may then write the data into the external system, or just use them to construct a DataArea and call the controller’s process method. If a connection problem occurs when writing the data to the system, an UnavailableException should be thrown. If another error occurs, a ConnectorException should be thrown.

The method should return the BO that is received as a return value from the controller’s process() method.

snapshot()

```
public String snapshot(Collection params) throws ConnectorException, UnavailableException
```

The external system may call this method when it wants to have data read and stored in a snapshot field in synchronous mode. This method should not make any calls into the controller.

When running in asynchronous mode, the EIP reads the data that should be transferred not at the moment when the request is done. Depending on the polling-interval, the current amount of transfers and the availability of connectors, this is a point of time in the near or far future. To have the data collected at the moment the request is made, the snapshot() method is intended to be used. The data should be stored in the external system to be accessed later in asynchronous mode.

The method should return the GUID of the data that it has read from the external system.

stop()

```
public void stop() throws ConnectorException
```

The controller calls this method when the connector should disconnect from its system. This is done when the dynamic-connect feature is activated and the transfer has been completed or the EIP is terminating.

The dynamic-connect feature is an optional configuration tag for the connector inside the eai_ini.xml. For further information, please refer to the Administrator Manual.

release()

```
public void release() throws ConnectorException
```

The controller calls this method when the connector is terminated. This is usually only the case when the EIP terminates. This method is the counterpart to the method init().

getMode()

```
public int getMode()
```

This method returns the connector mode (MODE_SOURCE, MODE_TARGET, or MODE_BOTH).

Thread Safety

When implementing the connector please ensure that the access to member variables is thread-safe when they are used in multiple methods.

Please have also in mind to use the smallest synchronization blocks as possible. You should not synchronize the interface methods since this may lead to locking problems on the connector itself.

Chapter 4

WebServices

To provide own Web Services to the Enterprise Integration Platform, you have to create an implementation class, add it to the configuration and deploy it to the Web Server's directory.

Implementation

When implementing the Web Service Java class, you may inherit your class from `com.eigner.eai.connector.net.ws.WebService`. This abstract base class provides you with a `Logger` instance and convenience methods for handling the Web Service request.

Basically, your code should do the following:

```
// The context (name of the web service connector) must be either provided by
// the method call or by a dynamic mapping.
WebServiceContext wsc = WebServiceContextFactory.getContext(context);

// Extract the required data from the method call.
// key: Unique key for data
// noun: Business Object noun (e.g. ITEM)
// verb: Business Object verb (e.g. CREATE)
// message: XML data
// language: Language code (see Common Section in the Administration Manual)
// synchronous: Flag for synchronous data transmission
String resultString = wsc.process(key, noun, verb, message, language, synchronous);

// Prepare the result XML string for the return value of the method call (if any)
```

For further information regarding the data, please refer to the chapter about the XDOs in the Administration Manual.

Configuration

Depending on the type of connector, the definition of the Web Service must be added to the synchronous connector's configuration or the asynchronous connector's configuration, although the definition is identical.

Example:

```
<connector name="ws" version="2.1.0" active="false" class="com.eigner.eai.connector.net.WebServiceConnector">
  <connection name="default" active="true">
    ...
    <service name="myservice" wsdd="/com/foo/MyService.wsdd" location="/axis/services/MyService"/>
    ...
  </connection>
  ...
</connector>
```

Deployment

For deploying your Web Service into the EIP, please provide a proper WSDD (Web Service Deployment Description) file.

Example:

```
<deployment name="eip" xmlns="http://xml.apache.org/axis/wsdd/" xmlns:java="http://xml.apache.org/axis/wsdd/providers/java">
  <service name="MyService" provider="java:MSG">
    <parameter name="className" value="com.foo.MyService"/>
    <parameter name="allowedMethods" value="**"/>
  </service>
</deployment>
```

For further information, please see <http://ws.apache.org/axis/java/user-guide.html> (esp. “Custom Deployment - Introducing WSDD” and “Service Styles - RPC, Document, Wrapped, and Message”).

Then pack your Java classes and this WSDD file into a JAR and deploy it to the webapps’s axis/WEB-INF/lib directory. The webapps’s directory is specified in the file conf/eai_ini.xml under eai-root/controller/webserver.

You may need to delete the file axis/WEB-INF/server-config.xml and restart the Integration Platform in order to use your Web Service.

Chapter 5

Additional Documentation

In addition to this document, Agile Software also provides the Java Documentation of Java classes and methods, which are necessary to develop your connector.

The Javadoc package (HTML files) includes following pages (which are located in docs/apidocs directory):

- ❑ Documentation of the BusinessObject class and its relatives (com.eigner.commons.businessobject) that represent the internal data structure that is sent and received by the connectors.
- ❑ Documentation of the XDO and XDOTransformer classes (com.eigner.commons.dataobject), which are necessary for the creation and parsing of XML Data Objects.
- ❑ Documentation of the connector interfaces (com.eigner.eai.connector), which explains what methods a connector needs to implement and which exceptions (ConnectorException and UnavailableException) can be thrown into the application controller.
- ❑ Documentation of the ControllerInstance interface (com.eigner.eai.connector) that is used to interact with the controller, of the ContextException class (com.eigner.commons.config) that may be thrown, and of the Decrypter interface (com.eigner.commons.crypt) that may be used to decrypt sensible data like passwords.
- ❑ Documentation of the logging framework.
- ❑ Documentation of the NestedException and NestedRuntimeException classes (com.eigner.commons.lang) which are base classes for most of the actually thrown exceptions.
- ❑ Documentation of some utility classes, which you may use when needed.

