

**Oracle® Retail Warehouse Management System**  
Installation Guide  
Release 13.2.7  
E51791-03

April 2014

Copyright © 2014, Oracle and/or its affiliates. All rights reserved.

Primary Author: Donna Linde

Contributors: Nathan Young

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this software or related documentation is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

## Value-Added Reseller (VAR) Language

### Oracle Retail VAR Applications

The following restrictions and provisions only apply to the programs referred to in this section and licensed to you. You acknowledge that the programs may contain third party software (VAR applications) licensed to Oracle. Depending upon your product and its version number, the VAR applications may include:

(i) the **MicroStrategy** Components developed and licensed by MicroStrategy Services Corporation (MicroStrategy) of McLean, Virginia to Oracle and imbedded in the MicroStrategy for Oracle Retail Data Warehouse and MicroStrategy for Oracle Retail Planning & Optimization applications.

(ii) the **Wavelink** component developed and licensed by Wavelink Corporation (Wavelink) of Kirkland, Washington, to Oracle and imbedded in Oracle Retail Mobile Store Inventory Management.

(iii) the software component known as **Access Via**™ licensed by Access Via of Seattle, Washington, and imbedded in Oracle Retail Signs and Oracle Retail Labels and Tags.

(iv) the software component known as **Adobe Flex**™ licensed by Adobe Systems Incorporated of San Jose, California, and imbedded in Oracle Retail Promotion Planning & Optimization application.

You acknowledge and confirm that Oracle grants you use of only the object code of the VAR Applications. Oracle will not deliver source code to the VAR Applications to you. Notwithstanding any other term or condition of the agreement and this ordering document, you shall not cause or permit alteration of any VAR Applications. For purposes of this section, "alteration" refers to all alterations, translations, upgrades, enhancements, customizations or modifications of all or any portion of the VAR Applications including all reconfigurations, reassembly or reverse assembly, re-engineering or reverse engineering and recompilations or reverse compilations of the VAR Applications or any derivatives of the VAR Applications. You acknowledge that it shall be a breach of the agreement to utilize the relationship, and/or confidential information of the VAR Applications for purposes of competitive discovery.

The VAR Applications contain trade secrets of Oracle and Oracle's licensors and Customer shall not attempt, cause, or permit the alteration, decompilation, reverse engineering, disassembly or other reduction of the VAR Applications to a human perceivable form. Oracle reserves the right to replace, with functional equivalent software, any of the VAR Applications in future releases of the applicable program.



---

---

# Contents

<b>Send Us Your Comments</b> .....	<b>ix</b>
<b>Preface</b> .....	<b>xi</b>
Audience .....	xi
Related Documents.....	xi
Customer Support.....	xi
Review Patch Documentation.....	xi
Improved Process for Oracle Retail Documentation Corrections .....	xii
Oracle Retail Documentation on the Oracle Technology Network.....	xii
Conventions.....	xii
<b>1 Preinstallation Tasks</b> .....	<b>1</b>
Check Supported Database Server Requirements.....	1
Check Supported Application Server Requirements .....	2
Verify Single Sign-On.....	3
Check Supported Web Browser and Client Requirements .....	3
Supported Radio Frequency Device Requirements .....	4
Supported Oracle Retail Products .....	4
Supported Oracle Retail Integration Technologies .....	4
<b>2 RAC and Clustering</b> .....	<b>5</b>
<b>3 Patch Installation</b> .....	<b>7</b>
<b>4 Patch RWMS Database Installation</b> .....	<b>9</b>
Patch RWMS Database using the Patch Installer.....	9
Create Staging Directory for RWMS Database Schema Files.....	9
Optional Security Step from Previous Patch.....	10
Run the RWMS Database Schema Patch Installer .....	10
<b>5 Patch Application Server Installation Tasks</b> .....	<b>13</b>
Option 1: Use Application Installer to Patch.....	13
Create Staging Directory for RWMS Application Files .....	13
Custom Modules.....	14
Run the Installer Patching Utility .....	14
Run the RWMS Application Installer.....	15
Resolving Errors Encountered During Application Installation.....	18
RWMS Reports Copied by the Application Installer .....	18
Option 2: Compile RWMS Forms Manually .....	18
Install RWMS Forms.....	19
Delete Obsolete Files .....	20
Configure WebLogic 10.3.6 for RWMS .....	20
Clustered Installations – Post-Installation Steps .....	24
Install the Online Help .....	24
Install rwms-icons.jar .....	24

Remove rwms13unix.conf from the forms configuration .....	25
Test the RWMS Application .....	25
<b>6 RWMS Reports Installation—Patch .....</b>	<b>27</b>
BI Server Component Installation Tasks.....	27
BiPublisher 11g – Installation Process Overview .....	27
BiPublisher 11g – Install Oracle BI EE 11g .....	28
Manually Copy Reports to Install Directory .....	40
BI Publisher 11g – Installing the RWMS BI Publisher Templates .....	41
BiPublisher 11g – Configuring the RWMS JDBC connection .....	42
Verify Oracle BI Publisher Set Up for RWMS Reports .....	43
Installing WebUtil Support Libraries .....	44
Configuring Forms to use BI and WebUtil.....	45
Check the Configuration of formsweb.cfg .....	45
Configuring the Forms Installation Environment Files.....	47
Adding Radio Frequency Launch Configurations .....	52
File Placement .....	52
Configure .env file variables .....	52
Update the RF launch modules.....	52
<b>A Appendix: RWMS Database Patch Installer Screens .....</b>	<b>55</b>
<b>B Appendix: RWMS Application Installer Screens .....</b>	<b>59</b>
<b>C Appendix: Common Installation Errors.....</b>	<b>69</b>
GUI Mode Crashes when Installing on AIX 7.1 .....	69
Database Installer hangs on startup .....	69
Warning: Could not create system preferences directory .....	69
Warning: Could not find X Input Context.....	70
Unresponsive drop-downs .....	70
Could not execl robot child process: Permission denied.....	71
ConcurrentModificationException in Installer GUI.....	71
FRM-30064: Unable to parse statement select while compiling fm_ituda.fmb .....	71
ORA-04031 (unable to allocate memory) error during database schema installation.....	72
X Error of failed request: BadWindow (invalid Window parameter) .....	72
RIB Errors.....	72
Error connecting to database URL.....	73
Forms Installer fails on HP-UX .....	73
RWMS Forms recompile could fail although a successful message appears .....	73
RWMS Forms apply_item_class_s.fmb or fwd_pick_loc_editor_s.fmb fail to compile .....	74
GUI screens fail to open when running Installer.....	74
Installer fails with sun.security.validator.KeyStores exception.....	74
<b>D Appendix: URL Reference .....</b>	<b>75</b>
JDBC URL for a Database .....	75
LDAP Server URL.....	75

JNDI Provider URL for an Application .....	75
<b>E Appendix: Oracle Single Sign-On Resource Access Descriptors .....</b>	<b>77</b>
<b>F Appendix: Oracle Single Sign-On for WebLogic .....</b>	<b>79</b>
What Do I Need for Oracle Single Sign-On? .....	79
Can Oracle Access Manager Work with Other SSO Implementations? .....	79
Oracle Single Sign-on Terms and Definitions .....	80
What Single Sign-On is not .....	81
How Oracle Single Sign-On Works .....	82
Installation Overview .....	83
User Management .....	84
<b>G Appendix: Setting Up an Oracle Wallet.....</b>	<b>87</b>
Set up a Wallet.....	87
Additional Wallet Commands .....	89
Set up Application (Java) Wallet for RWMS .env File .....	89
<b>H Appendix: Setting Up Password Stores with Oracle Wallet.....</b>	<b>91</b>
About Password Stores and Oracle Wallet.....	91
Setting Up Password Stores for Database User Accounts.....	92
Setting Up Wallets for Database User Accounts.....	93
For RMS, RPM Plsql Batch, RETL DB, RWMS batch, and ARI .....	93
For Java Applications (SIM, ReIM, RPM, Alloc, RIB, RSL, AIP, RETL) .....	95
How Does the Wallet Relate to the Application? .....	98
How Does the Wallet Relate to Java Batch Program Use? .....	98
Setting up RETL Wallets .....	98
Quick Guide for Retail Wallets .....	101
<b>I Appendix: Optional Security .....</b>	<b>105</b>
(Optional) Grant Necessary Install Permissions.....	105
(Optional) Revoke Install Permissions.....	105
Recompile Invalid Objects .....	105
<b>J Appendix: Web Browser Configuration.....</b>	<b>107</b>
Microsoft Internet Explorer Version 9.0.....	107
Mozilla Firefox Version 17 ESR.....	109
<b>K Appendix: Installation Order .....</b>	<b>111</b>
Enterprise Installation Order.....	111



---

---

# Send Us Your Comments

Oracle Retail Warehouse Management System Installation Guide, Release 13.2.7.

Oracle welcomes customers' comments and suggestions on the quality and usefulness of this document.

Your feedback is important, and helps us to best meet your needs as a user of our products. For example:

- Are the implementation steps correct and complete?
- Did you understand the context of the procedures?
- Did you find any errors in the information?
- Does the structure of the information help you with your tasks?
- Do you need different information or graphics? If so, where, and in what format?
- Are the examples correct? Do you need more examples?

If you find any errors or have any other suggestions for improvement, then please tell us your name, the name of the company who has licensed our products, the title and part number of the documentation and the chapter, section, and page number (if available).

---

**Note:** Before sending us your comments, you might like to check that you have the latest version of the document and if any concerns are already addressed. To do this, access the Online Documentation available on the Oracle Technology Network Web site. It contains the most current Documentation Library plus all documents revised or released recently.

---

Send your comments to us using the electronic mail address: [retail-doc\\_us@oracle.com](mailto:retail-doc_us@oracle.com)  
Please give your name, address, electronic mail address, and telephone number (optional).

If you need assistance with Oracle software, then please contact your support representative or Oracle Support Services.

If you require training or instruction in using Oracle software, then please contact your Oracle local office and inquire about our Oracle University offerings. A list of Oracle offices is available on our Web site at [www.oracle.com](http://www.oracle.com).



---

---

# Preface

Oracle Retail Installation Guides contain the requirements and procedures that are necessary for the retailer to install Oracle Retail products.

## Audience

This Installation Guide is written for the following audiences:

- Database administrators (DBA)
- System analysts and designers
- Integrators and implementation staff

## Related Documents

For more information, see the following documents in the Oracle Retail Warehouse Management System Release 13.2.7 documentation set:

- *Oracle Retail Warehouse Management System Release Notes*
- *Oracle Retail Warehouse Management System Implementation Guide*
- *Oracle Retail Warehouse Management System Radio Frequency User Guide*

## Customer Support

To contact Oracle Customer Support, access My Oracle Support at the following URL:

<https://support.oracle.com>

When contacting Customer Support, please provide the following:

- Product version and program/module name
- Functional and technical description of the problem (include business impact)
- Detailed step-by-step instructions to re-create
- Exact error message received
- Screen shots of each step you take

## Review Patch Documentation

When you install the application for the first time, you install either a base release (for example, 13.2) or a later patch release (for example, 13.2.7). If you are installing the base release or additional patch releases, read the documentation for all releases that have occurred since the base release before you begin installation. Documentation for patch releases can contain critical information related to the base release, as well as information about code changes since the base release.

---

## Improved Process for Oracle Retail Documentation Corrections

To more quickly address critical corrections to Oracle Retail documentation content, Oracle Retail documentation may be republished whenever a critical correction is needed. For critical corrections, the republication of an Oracle Retail document may at times **not** be attached to a numbered software release; instead, the Oracle Retail document will simply be replaced on the Oracle Technology Network Web site, or, in the case of Data Models, to the applicable My Oracle Support Documentation container where they reside.

This process will prevent delays in making critical corrections available to customers. For the customer, it means that before you begin installation, you must verify that you have the most recent version of the Oracle Retail documentation set. Oracle Retail documentation is available on the Oracle Technology Network at the following URL:

<http://www.oracle.com/technetwork/documentation/oracle-retail-100266.html>

An updated version of the applicable Oracle Retail document is indicated by Oracle part number, as well as print date (month and year). An updated version uses the same part number, with a higher-numbered suffix. For example, part number E123456-02 is an updated version of a document with part number E123456-01.

If a more recent version of a document is available, that version supersedes all previous versions.

## Oracle Retail Documentation on the Oracle Technology Network

Documentation is packaged with each Oracle Retail product release. Oracle Retail product documentation is also available on the following Web site:

<http://www.oracle.com/technetwork/documentation/oracle-retail-100266.html>

(Data Model documents are not available through Oracle Technology Network. These documents are packaged with released code, or you can obtain them through My Oracle Support.)

Documentation should be available on this Web site within a month after a product release.

## Conventions

**Navigate:** This is a navigate statement. It tells you how to get to the start of the procedure and ends with a screen shot of the starting point and the statement “the Window Name window opens.”

This is a code sample

It is used to display examples of code

---



---

## Preinstallation Tasks

This chapter includes steps to complete before installation.

### Check Supported Database Server Requirements

General Requirements for a database server running RWMS include the following.

Supported on	Versions Supported
Database Server OS	<p>OS certified with Oracle Database 11gR2 Enterprise Edition. Options are:</p> <ul style="list-style-type: none"> <li>▪ Oracle Linux 5 for x86-64 (Actual hardware or Oracle virtual machine).</li> <li>▪ Red Hat Enterprise Linux 5 for x86-64 (Actual hardware or Oracle virtual machine).</li> <li>▪ Oracle Linux 6 for x86-64 (Actual hardware or Oracle virtual machine).</li> <li>▪ Red Hat Enterprise Linux 6 for x86-64 (Actual hardware or Oracle virtual machine).</li> <li>▪ AIX 6.1 (Actual hardware or LPARs)</li> <li>▪ AIX 7.1 (Actual hardware or LPARs)</li> <li>▪ Solaris 10 SPARC (Actual hardware or logical domains)</li> <li>▪ Solaris 11 SPARC (Actual hardware or logical domains)</li> <li>▪ HP-UX 11.31 Integrity (Actual hardware, HPVM, or vPars)</li> </ul>
Database Server 11gR2	<p>Oracle Database Enterprise Edition 11gR2 (11.2.0.3) with the following specifications:</p> <p><b>Components:</b></p> <ul style="list-style-type: none"> <li>▪ Oracle Partitioning</li> <li>▪ Examples CD (Formerly the companion CD)</li> </ul> <p><b>Oneoff Patches:</b></p> <ul style="list-style-type: none"> <li>▪ 13036331: ORA-01031 INSUFFICIENT PRIVILEGES WHEN GRANTING EXECUTE ON DBMS PACKAGES.</li> </ul> <p><b>Other components:</b></p> <ul style="list-style-type: none"> <li>▪ Perl 5 or later</li> <li>▪ X-Windows interface</li> </ul>

---

**Note:** A working X-Server must be defined even when working with the text versions of the installer. It must be configured to accept XClients from the installation server in its access control list. Refer to XServer documentation for more information on using the xhost or equivalent commands.

---

## Check Supported Application Server Requirements

General requirements for an application server capable of running RWMS include the following.

Supported on	Versions Supported
Application Server OS	<p>OS certified with Oracle Fusion Middleware 11g Release1 (11.1.1.6). Options are:</p> <ul style="list-style-type: none"> <li>▪ Oracle Linux 5 for x86-64 (Actual hardware or Oracle virtual machine).</li> <li>▪ Red Hat Enterprise Linux 5 for x86-64 (Actual hardware or Oracle virtual machine).</li> <li>▪ Oracle Linux 6 for x86-64 (Actual hardware or Oracle virtual machine).</li> <li>▪ Red Hat Enterprise Linux 6 for x86-64 (Actual hardware or Oracle virtual machine).</li> <li>▪ AIX 6.1 (Actual hardware or LPARs)</li> <li>▪ AIX 7.1 (Actual hardware or LPARs)</li> <li>▪ Solaris 10 SPARC (Actual hardware or logical domains)</li> <li>▪ Solaris 11 SPARC (Actual hardware or logical domains)</li> <li>▪ HP-UX 11.31 Integrity (Actual hardware, HPVM, or vPars)</li> </ul>
Application Server	<p>Oracle Fusion Middleware 11g Release 1 (11.1.1.6)</p> <p><b>Components:</b></p> <ul style="list-style-type: none"> <li>▪ Oracle WebLogic Server 11g Release 1 (10.3.6)</li> <li>▪ Oracle Forms Services 11g Release 2 (11.1.2.1) with Oneoff Patches 17448420: MANIFEST ATTRIBUTE ERROR IN JAVA CONSOLE WHILE RUNNING FORMS URL WITH 7U45_B11</li> </ul> <p>Java: JDK 1.7.0+ 64 bit</p> <p><b>IMPORTANT:</b> If there is an existing WebLogic installation on the server, you must upgrade to WebLogic 10.3.6. All middleware components associated with WebLogic server should be upgraded to 11.1.1.6 and ORACLE Forms must have new install to 11gR2 forms (11.1.2.1).</p> <p>Back up the weblogic.policy file (\$WLS_HOME/wlserver_10.3/server/lib) before upgrading your WebLogic server, because this file could be overwritten. Copy over the weblogic.policy backup file after the WebLogic upgrade is finished and the post patching installation steps are completed.</p> <p><b>Optional (SSO required)</b></p> <ul style="list-style-type: none"> <li>▪ Oracle Identity Management 11gR1 (11.1.1.6) optionally with Oracle Access Manager 11gR1 (11.1.1.5) using OSSO agent. Must have separate WebLogic 10.3.5 for Oracle Access Manager 11g.</li> </ul> <p><b>Other components:</b></p> <ul style="list-style-type: none"> <li>▪ Oracle BI Publisher 11g (11.1.1.7)</li> </ul>

## Verify Single Sign-On

If RWMS is not being deployed in a Single Sign-On environment, skip this section.

If Single Sign-On is to be used, verify the Oracle Identity Management (OIM/IDM) 11gR1 version 11.1.1.6 has been installed along with the components listed in the above Application Server requirements section. Verify the HTTP Server is registered with the Oracle Access Manager (OAM) 11gR1 as a partner application.

---

**Note:** Oracle Application Server (OAS) 10.1.4 Single Sign-On is only supported for existing installations, this support may be dropped in a future 13.2.X patch release.

---

## Check Supported Web Browser and Client Requirements

General requirements for client running RWMS include the following.

Requirement	Version
Operating system	Windows 7
Display resolution	1024x768 or higher
Processor	2.6GHz or higher
Memory	1GByte or higher
Networking	intranet with at least 10Mbps data rate
Oracle (Sun) Java Runtime Environment	1.7.0+
Browser	Microsoft Internet Explorer version 9.0, or Mozilla Firefox ESR 17.0.3+

See [Appendix: Web Browser Configuration](#) for more information on configuring Web browsers with Java Runtime Environment versions.

## Supported Radio Frequency Device Requirements

Minimum requirements for radio frequency devices in order to run the RWMS application are:

- Minimum RF Screen Sizes
- Hand held: 240w x 320h pixels
- Wrist mount: 320w x 240h pixels
- Truck mount - half screen: 800w x 320h pixels

### Software Required on Handhelds

- Remote Desktop Client (aka Microsoft Terminal Services Client)
- DataWedge (software provided by and maintained by Motorola for use with the barcode scanners)

---

**Note:** The requirements above are based on the testing that was done using the following RF devices running on windows CE 5.0:

- Symbol MC9090 - (Hand Held)
  - Motorola VC5090 - (Truck Mount)
  - Motorola WT4090 - (Wrist mount)
- 

## Supported Oracle Retail Products

Requirement	Version
Oracle Retail Merchandising System (RMS)	13.2.7
Oracle Retail Store Inventory Management (SIM)	13.2.7

## Supported Oracle Retail Integration Technologies

Integration Technology	Version
Oracle Retail Integration Bus (RIB)	13.2.7

---

---

## RAC and Clustering

The Oracle Retail Warehouse Management System has been validated to run in two configurations on Linux:

- Standalone WLS and Database installations
- Real Application Cluster Database and WebLogic Server Clustering

The Oracle Retail products have been validated against an 11.2.0.3 RAC database. When using a RAC database, all JDBC connections should be configured to use THIN connections rather than OCI connections. It is suggested that if you do use OCI connections, the Oracle Retail products database be configured in the tnsnames.ora file used by the Oracle Application Server installations.

Clustering for WebLogic Server 10.3.6 is managed as an Active-Active cluster accessed through a Load Balancer. It is suggested that a Web Tier 11.1.1.7 installation be configured to reflect all application server installations. Validation has been completed utilizing a RAC 11.2.0.3 Oracle Internet Directory database with the WebLogic 10.3.6 cluster.

### References for Configuration:

- Oracle® Fusion Middleware High Availability Guide 11g Release 1 (11.1.1) Part Number E10106-09
- Oracle Real Application Clusters Administration and Deployment Guide 11g Release 1 (11.1) Part Number B28254-07



---

---

## Patch Installation

The database portion of RWMS can be upgraded from any 13.2.x release. This guide details the steps needed to perform a patch installation of RWMS. For additional information on the upgrade, see the My Oracle Support document, *Oracle Retail Upgrade Guide* (ID 1073414.1).

The Oracle Retail Upgrade Guide describes the approach that this Oracle Retail application takes for the upgrading process, as well as this product's upgrade assumptions and considerations.

The following chapters document the patch process:

- Chapter 4, Patch RWMS Database Installation
- Chapter 5, Patch Application Server Installation Tasks



---

---

## Patch RWMS Database Installation

This section describes how to update the RWMS database schema to release 13.2.7. It is assumed that your existing RWMS database schema is on at least release 13.2.

---

---

**Note:** Shut down any applications that may be using the RWMS schema (for example RIB) before applying a schema patch.

---

---

---

---

**Note:** If you are installing multiple patches, you must run the database schema patch installer separately for each patch. For example, if upgrading from 13.2 to 13.2.7, the installer should first be run to install the 13.2.3 scripts, followed by 13.2.3.1, 13.2.4, 13.2.5, 13.2.6 and 13.2.7.

---

---

### Patch RWMS Database using the Patch Installer

The RWMS 13.2.7 database schema patch installer should be used to apply the RWMS patch.

Before you apply the RWMS 13.2.7 patch:

- Make a backup of all your objects and database schema.
- Determine which patches and hot fix bundles have already been installed.
- Review the enclosed RWMS 13.2.7 Release Notes (rwms-1327-rn.pdf).
- Review each of the enclosed defect documents.
- Make sure any applications that connect to the RWMS schema are shut down. This includes RIB and anything else that could be using the schema.

### Create Staging Directory for RWMS Database Schema Files

To create a staging directory for RWMS database schema files, complete the following steps.

1. Log in to the database server as a user that can connect to the RWMS database.
2. Create a staging directory for the RWMS 13.2.7 Patch. There should be a minimum of 140 MB disk space available in this location.
3. Copy the rwms1327dbpatch.zip file from the RWMS 13.2.7 release to the staging directory. This is referred to as DB\_PATCH\_DIR when patching a database schema.
4. Change directories to DB\_PATCH\_DIR and extract the rwms1327dbpatch.zip file. This creates a RWMS/dbschemapatch subdirectory under DB\_PATCH\_DIR.

## Optional Security Step from Previous Patch

If you ran the optional `revoke_rwms_admin_privs.sql` script to secure the permissions for the RWMS schema that was included in the 13.2.4 patch, you must grant additional permissions before running the database installation.

To grant necessary install permissions to the RWMS schema, run the following script as the database sys user.

```
DB_PATCH_DIR/rwms/dbschemapatch/util/grant_rwms_admin_privs.sql
```

For more information, see “[Appendix: Optional Security.](#)”

## Run the RWMS Database Schema Patch Installer

---

**Note:** See “[Appendix: RWMS Database Patch Installer Screens](#)” for details about screens and fields in the RWMS database schema patch installer.

---

1. Change directories to `DB_PATCH_DIR/rwms/dbschemapatch`.
2. Source the `oraenv` script to set up the Oracle environment variables (such as `ORACLE_HOME`, `ORACLE_SID`, `PATH`).

---

```
Example: prompt$ . oraenv
           ORACLE_SID = [] ? mydb
           prompt$
```

---

Verify the `ORACLE_HOME` and `ORACLE_SID` variables after running this script.

---

```
Example: prompt$ echo $ORACLE_HOME
           /u00/oracle/product/mydbversion
           prompt$ echo $ORACLE_SID
           mydb
```

---

3. Set and export the following environment variables. These variables are needed in addition to the environment variables set by the `oraenv` script above.

Variable	Description	Example
<code>JAVA_HOME</code>	Java home needed to run the GUI. Java 1.7 is required	<code>JAVA_HOME=/usr/java/jdk1.7</code> <code>export JAVA_HOME</code>
<code>NLS_LANG</code>	Locale setting for Oracle database client	<code>NLS_LANG=AMERICAN_AMERICA.UTF8</code> <code>export NLS_LANG</code>
<code>DISPLAY</code>	Address and port of X server on desktop system of user running install. Optional for <code>dbschema</code> installer	<code>DISPLAY=&lt;IP address&gt;:0</code> <code>export DISPLAY</code>

4. If you are going to run the installer in GUI mode using an X server, you need to have the `XTEST` extension enabled. This setting is not always enabled by default in your X server. See “[Appendix: Common Installation Errors](#)” for details.
5. If the patch installer has already been run in this location you may wish to back up the `ant.install.properties` file. The settings from the RWMS 13.2.7 patch installation will be refreshed with the latest input every time the installer runs.

6. Run the `install.sh` script to start the installer.

---

**Note:** Below are the usage details for `install.sh`. The typical usage for GUI mode is no arguments.

---

```
install.sh [text | silent]
```

---

7. On the Apply a Patch page, provide the path to the corresponding patch you are applying. This path will be `DB_PATCH_DIR/rwms/dbschemapatch/rwms-dbpatch/<version>/`.
8. After the installer is complete, you can check its log file: `rwms-install-dbschema.<timestamp>.log`.
9. The installer leaves behind the `ant.install.properties` file for future reference and repeat installations. This file contains inputs you provided. As a security precaution, make sure that the file has restrictive permissions.

---

**Example:** `chmod 600 ant.install.properties`

---

10. If you are applying multiple patches (for example, if you are going from 13.2 to 13.2.7), rerun the installer. On the Apply a Patch page, select the next patch in the sequence. Repeat this step until you have installed all required patches for the desired patch level.

---

**Note:** For more information, see "[Appendix: Optional Security](#)."

---



---

---

## Patch Application Server Installation Tasks

There are two different methods to use for installing the RWMS 13.2.7 Application. Option 1 uses the installer to apply the patch. Option 2 compiles the RWMS forms directly.

This section describes how to upgrade the RWMS application from 13.2.0 to 13.2.7.

Be sure to review the *Oracle Retail Warehouse Management Release Notes* for the 13.2.7 release.

---

---

**IMPORTANT:** If there is an existing WebLogic installation on the server, you must upgrade WebLogic to WebLogic 10.3.6. All middleware components associated with WebLogic server should be upgraded to 11.1.1.6.

Back up the weblogic.policy file (\$WLS\_HOME/wlserver\_10.3/server/lib) before upgrading your WebLogic server, because this file could be overwritten. Copy over the weblogic.policy backup file after the WebLogic upgrade is finished and the post patching installation steps are completed.

---

---

### Option 1: Use Application Installer to Patch

If you already have RWMS 13.2 installed, do not use the RWMS 13.2 application installer to apply this patch because customizations will be overwritten. Instead, compile the forms manually. Go to the section [“Option 2: Compile RWMS Forms Manually.”](#)

If you are choosing to install RWMS 13.2 and all subsequent patches up to 13.2.7 at the same time and you have not run the RWMS 13.2 application installer, the RWMS 13.2 application installer can be used to install and compile all the forms in 13.2 and all subsequent patches up to 13.2.7 at one time.

### Create Staging Directory for RWMS Application Files

To create a staging directory for RWMS application patch files, complete the following steps.

1. Log on to your application server as a user with read and write access to the WebLogic files.
2. If you do not already have one, create a staging directory for the RWMS application installation software (13.2). There should be a minimum of 600 MB disk space available in this location.
3. Copy the file `rwms13application.zip` from the RWMS 13.2 release to staging directory. This will be referred to as `STAGING_DIR` when installing application software and reports.
4. Change directories to `STAGING_DIR` and extract the file `rwms13application.zip`. This will create an `rwms/application` subdirectory under `STAGING_DIR`.
5. Create a staging directory for the RWMS Application patch (which contains all patches from 13.2.x through 13.2.7). There should be a minimum of 150 MB disk space available in this location.

6. Copy the file `rwms1327apppatch.zip` from the RWMS 13.2.7 release to staging directory. This will be referred to as `APP_PATCH_DIR` when installing application software and reports.
7. Change directories to `APP_PATCH_DIR` and extract the file `rwms1327apppatch.zip`. This creates an `app-patch` subdirectory under `APP_PATCH_DIR`.

## Custom Modules

Custom source can be provided by the user in a folder named `APP_PATCH_DIR/app-patch/patch-util/custom`. The source code in this folder is applied last, after all patches have been applied.

## Run the Installer Patching Utility

---

**Note:** This utility automates the copying of forms and libraries from the `APP_PATCH_DIR` to the `STAGING_DIR`.

---

To run the installer patching utility, complete the following steps.

1. Set the `JAVA_HOME` environment variable to point to a JDK.
2. Set the `ANT_HOME` environment variable to point to an Ant installation. There is one included with the RWMS installer that can be used for this.  
`ANT_HOME=<INSTALL_DIR>/rwms/application/ant`  
`export ANT_HOME`
3. Change directories to `APP_PATCH_DIR/app-patch/patch-util/`
4. Modify the `patch.properties` file. Set the `installer.dir` and `patch.to.version` properties.

Variable	Description
<code>installer.dir</code>	The directory where the installer files are located under <code>STAGING_DIR</code> . Example: <code>/opt/rwms/application</code> . This directory will contain the <code>install.sh</code> file.
<code>patch.to.version</code>	The version to which you want to patch. Example: <code>13.2.7</code>

5. Run the `patch.sh` script. This script will copy the files from each patch up to the patch specified in the `patch.to.version` property and generate a full installer package containing all forms up to the current patch.

## Run the RWMS Application Installer

**Note:** If you are using AIX 7.1, the "retail-OCM-wls.zip" file present in the STAGING\_DIR/rwms must be renamed or removed, before running the installer. See [Appendix: Common Installation Errors](#) for more information.

To run the RWMS application installer, do the following.

1. Log on to your application server as a user with read and write access to the WebLogic files.
2. Change directories to STAGING\_DIR/rwms/application. This directory was created when the rwms13application.zip file was expanded under STAGING\_DIR,
3. Set and export the following environment variables.

Variable	Description	Example
DOMAIN_HOME	The location where Forms 11.1.2.1domain has been installed.	DOMAIN_HOME= /u00/webadmin/product/10.3.x/WLS_Forms/user_projects/domains/ClassicDomain/ export DOMAIN_HOME
WLS_INSTANCE	The name of the managed server that contains Oracle Forms. The name will appear under \$DOMAIN_HOME/config/fmwc onfig/servers	WLS_INSTANCE=WLS_FORMS export WLS_INSTANCE
ORACLE_SID	The database/SID where the RWMS schema resides.	ORACLE_SID=mydb export ORACLE_SID
NLS_LANG	Locale setting for Oracle database client.	NLS_LANG=AMERICAN_AMERICA.UTF8 export NLS_LANG
JAVA_HOME	Location of Java. Usually the same Java which is being used by Weblogic. Java choices are: JDK 1.7.0+ 64 bit	JAVA_HOME= /u00/webadmin/java/jdk1.7 export JAVA_HOME
DISPLAY	Address and port of X server on desktop system of user running install. Required for forms application installer.	DISPLAY=<IP address>:0 export DISPLAY

4. To install the RWMS application you must use an X server such as Exceed and have set the DISPLAY environment variable. The installer does not continue otherwise.
5. Run the install.sh script to start the installer.

**Note:** Below are the usage details for install.sh. The typical usage for GUI mode is no arguments.

```
./install.sh [text | silent]
```

6. The Installer automatically sets additional environment variables based on the values of the environment variables set in Step 3. At the end of the preinstallation checks a summary will print, containing these new environment variables:

---

**Example:**

```
MW_HOME=/u00/webadmin/product/10.3.x/WLS_
Forms
ORACLE_HOME=/u00/webadmin/product/10.3.x/WLS_
Forms/as_1
ORACLE_INSTANCE=/u00/webadmin/product/10.3.x
/WLS_Forms/asinst_1
DOMAIN_HOME=/u00/webadmin/product/10.3.x/WLS_
Forms/user_projects/domains/ClassicDomain
WLS_INSTANCE=WLS_FORMS
ORACLE_SID=mydb
JAVA_HOME=/u00/webadmin/java/jdk1.7(This should be
set to the JDK being used by the WebLogic server.)
```

---

Verify that these environment variables are correct. If any of them are incorrect, verify that the WebLogic shell scripts that set them are configured properly. Check the following scripts:

```
$DOMAIN_HOME/bin/setDomainEnv.sh
$WEBLOGIC_HOME/wlserver_10.3.x/common/bin/commEnv.sh
```

---

**Example:**

```
/u00/webadmin/product/10.3.x/WLS_Forms/user_
projects/domains/ClassicDomain/bin/setDomainEnv.sh
/u00/webadmin/product/10.3.x/WLS_Forms/wlserver_
10.3/common/bin/commEnv.sh
```

---

Depending on system resources, a typical installation takes anywhere from 45 minutes to two hours.

The installer asks for an installation directory. This is the destination directory for the RWMS files. This directory will be referred to as `INSTALL_DIR` for the remainder of this chapter. **Do not provide an `INSTALL_DIR` that is located at or underneath `STAGING_DIR`.**

---

**Note:** You may see the following warning repeated during installation:

```
[exec] Warning! One or more of your selected
locales are not available.
[exec] Please invoke the commands "locale" and
"locale -a" to verify your
[exec] selections and the available locales.
[exec]
[exec] Continuing processing using the "C" locale.
```

or

```
[exec] couldn't set locale correctly
```

This warning can be ignored.

---

7. After the installation is complete, check the log file to verify a successful installation: `INSTALL_DIR/base/log/rwms.app.install.<timestamp>.log`. The installer may not fail if forms have failed to compile, so verify by scanning the file for forms compilation errors (for example, "Compilation errors have occurred"). If none are found, the installation was successful.
8. The installer leaves behind the `ant.install.properties` file for future reference and repeat installations. This file contains inputs you provided. As a security precaution, make sure that the file has restrictive permissions.

---

**Example:** `chmod 600 ant.install.properties`

**Note:** The object counts performed by the installer may be off due to the patch adding or removing modules. The installer warnings about this can be ignored

---

9. If during the screens you chose not to have the installer automatically configure WebLogic, after the installation is complete follow the post installation tasks by making backups of the listed files and copying the required files to the specified location.

**Example:**

```
#####
##                               WebLogic Configuration Tasks                               ##
#####
Contact your WebLogic administrator and have them make backups of the following
files:

/u00/webadmin/product/10.3.x/WLS_Forms/user_projects/domains/ClassicDomain/config/
fmwconfig/servers/WLS_FORMS/applications/formsapp_11.1.2/config/forms/registry/ora
cle/forms/registry/Registry.dat
/u00/webadmin/product/10.3.x/WLS_Forms/user_projects/domains/ClassicDomain/config/
fmwconfig/servers/WLS_FORMS/applications/formsapp_11.1.2/config/formswb.cfg

Have the WebLogic administrator stop WLS_FORMS and ohs1,
copy everything in /home/oretail/rwms132/install/post
to /u00/webadmin/product/10.3.x/WLS_Forms to update the files
and then start WLS_FORMS and ohs1
for the changes to take effect.
```

```
example: cp -R * /u00/webadmin/product/10.3.x/WLS_Forms
```

## Resolving Errors Encountered During Application Installation

In the event a form or menu does not compile, go to `INSTALL_DIR/base/error` to identify the objects that did not compile. To manually recompile the object, run `INSTALL_DIR/base/forms.profile` and run the following command:

```
# frmcmp.sh userid=$SUP module_type=form module=FORM_OR_MENU
```

You can also safely rerun the installer to see if the form compiles.

---

---

**Note:** If you rerun the installer, and choose to check the **Configure WebLogic** box in the installer screens, you may need to clean up duplicate entries in the WebLogic `formsweb.cfg` file.

---

---

## RWMS Reports Copied by the Application Installer

The application installer copies RWMS report files to `INSTALL_DIR/base/reports`. These files should be installed into BI Publisher as documented in the chapter, [RWMS Reports Installation—Patch](#).

## Option 2: Compile RWMS Forms Manually

To compile the RWMS forms manually requires the following steps.

1. Log on to the application server as the user that has write access to WebLogic.
2. Set the `DISPLAY` variable to the IP address plus `":0.0"` (for example, `10.1.1.1:0.0`) of the application server.

---

---

**Note:** `ORACLE_HOME` is the location where Oracle Forms 11gR2 has been installed  
`ORACLE_INSTANCE` is the location where WebLogic has been installed and contains the executables to compile forms.

---

---

**All OS Platforms**

Set the following variables:

- `PATH=$ORACLE_HOME/bin:$ORACLE_HOME/opmn/bin:$ORACLE_HOME/dcm/bin:INSTALL_DIR/base/forms_scripts:$PATH`
- `CLASSPATH=$ORACLE_HOME/jlib/importer:$ORACLE_HOME/jlib/debugger.jar:$ORACLE_HOME/jlib/utj.jar:$ORACLE_HOME/jlib/ewt3.jar:$ORACLE_HOME/jlib/share.jar:$ORACLE_HOME/jlib/dfc.jar:$ORACLE_HOME/jlib/help4.jar:$ORACLE_HOME/jlib/oracle_ice.jar:$ORACLE_HOME/jlib/jewt4.jar`
- `FORMS_BUILDER_CLASSPATH=$CLASSPATH`
- `FORMS_PATH=INSTALL_DIR/base/toolset/bin:INSTALL_DIR/base/forms/bin:$ORACLE_HOME/forms`
- `REPORTS_PATH=INSTALL_DIR/base/reports/bin:$ORACLE_HOME/forms`
- `TK_UNKNOWN=$ORACLE_INSTANCE/config/FRComponent/frcommon/guicommon/tk/admin`
- `UP=<RWMS schema owner>/<RWMS schema password>@<RWMS database>`

---

**Note:** See “[Appendix: Setting Up Password Stores with Oracle Wallet](#)” for how to set up database wallet.

**Note:** Verify that TNS is set up correctly by using the UP variable to successfully log in to the RWMS 13 schema.

**Example:** `/u00/oracle> sqlplus $UP`

---

- AIX
  - `LD_LIBRARY_PATH=$ORACLE_HOME/lib:$ORACLE_HOME/lib32:$ORACLE_HOME/jdk/jre/lib`
  - `LIBPATH=$LD_LIBRARY_PATH`
- Linux
  - `LD_LIBRARY_PATH=$ORACLE_HOME/lib:$ORACLE_HOME/lib32:$ORACLE_HOME/jdk/jre/lib`

**Install RWMS Forms**

Complete the following steps to install the forms and scripts.

1. Make a backup copy of the `INSTALL_DIR/base/forms` directories.
 

For the version number of the patch you are installing, navigate to the corresponding directory in `APP_PATCH_DIR` and copy the contents of the following directories into `INSTALL_DIR`. Depending on the patch, these directories may not exist.

  - Copy all forms (fmb) in `APP_PATCH_DIR/app-patch/<version>/forms/src` to the `INSTALL_DIR/base/forms/src` directory.
  - Copy all scripts in `APP_PATCH_DIR/app-patch/<version>/forms/bin` to the `INSTALL_DIR/base/forms/bin` directory.
2. Change directories to `INSTALL_DIR/base/forms/src`.
3. Run `forms.pll.sh` (in `INSTALL_DIR/base/forms/src`) to generate RWMS runtime forms – .plx’s.
  - Copy all .plx’s to the `INSTALL_DIR/base/forms/bin` directory

4. Run forms.fmb.sh (in INSTALL\_DIR/base/forms/src) to generate RWMS runtime forms – .fmx’s.
  - Move all .fmx’s to the INSTALL\_DIR/base/forms/bin directory
5. Run menus.mmb.sh (in INSTALL\_DIR/base/forms/src) to generate RWMS runtime forms – .mmx’s.
  - Move all .mmx’s to the INSTALL\_DIR/base/forms/bin directory

## Delete Obsolete Files

The following forms are obsolete as of the 13.2.7 release and should be deleted from INSTALL\_DIR.

```
INSTALL_DIR/base/forms/src/hh_container_checking_s.fmb
INSTALL_DIR/base/forms/bin/hh_container_checking_s.fmx
INSTALL_DIR/base/forms/src/wip_code_seq_editor_s.fmb
INSTALL_DIR/base/forms/bin/wip_code_seq_editor_s.fmx
```

## Configure WebLogic 10.3.6 for RWMS

---



---

**Note:** The following steps are required to configure WebLogic for RWMS. You may not need these steps if you are upgrading from a previous installation.

---



---

To configure WebLogic 10.3.6 for RWMS, complete the following steps.

---



---

**Note:** The proper WebLogic 10.3.6 components must be started to run Forms applications.

ORACLE\_HOME refers to the location where WebLogic 10.3.6 is installed.

---



---

1. Make a copy of the file **default.env** file located in <MW\_HOME>/user\_projects/domains/ClassicDomain/config/fmwconfig/servers/WLS\_FORMS/applications/formsapp\_11.1.2/config and rename it to a relevant file name (for example, rwms.env).
2. Modify the new rwms.env file by appending the location of the RWMS forms modules to the FORMS\_PATH variable setting, and by adding the NLS\_DATE\_FORMAT and NLS\_LANG variables to the end of this file. Additionally, the variable FORMS\_REJECT\_GO\_DISABLED\_ITEM=FALSE and FORMS\_USERNAME\_CASESENSITIVE=1 must also be added to the rwms.env file due to the changes between older version of Oracle Forms and WebLogic 10.3.6. For example,

```
FORMS_PATH=/u00/rwms/forms/bin:/u00/oracle/product/10.3.x_WLS/WLS/asinst_1
/FormsComponent/forms
NLS_DATE_FORMAT=DD-MON-RR
NLS_LANG=AMERICAN_AMERICA.UTF8
FORMS_USERNAME_CASESENSITIVE=1
FORMS_REJECT_GO_DISABLED_ITEM=FALSE
```

Add other variables ORACLE\_RWMS\_EXTRAS, RWMS\_FORMS\_SERVER, and RF\_LAUNCH\_VALUE\_ALIAS at the end of the **rwms.env** file.

For example,

```
ORACLE_RWMS_EXTRAS=/u00/rwms/extras
RWMS_FORMS_SERVER=http://<WebLogic_forms_server>:<portnumber>/
RF_LAUNCH_VALUE_ALIAS=/forms/rwms/rf_launch/
```

3. Complete the following steps to set up the RF launch module:

a. Copy the **rf\_launch** folder from the APP\_DIR/rwms to the following location:

```
<MW_HOME>/user_projects/domains/ClassicDomain/servers/WLS_FORMS/tmp/_WL_us
er/formsapp_11.1.2/e18uoi/war/rwms/
```

b. Update the **rwms\_rf\_menu.htm** file with the correct URLs for the variables **hh\_device**, **tm\_device**, **wr\_device**, and **exit\_script**.

For example,

```
var hh_device = "http://server:9001/forms/frmservlet?config=rwms132wls_hh";
var tm_device = "http://server:9001/forms/frmservlet?config=rwms132wls_tm";
var wr_device = "http://server:9001/forms/frmservlet?config=rwms132wls_wr";
var exit_script = "http://server:9001/forms/rwms/rf_launch/close.htm";
```

4. Start the WLS\_FORMS managed server inside ClassicDomain.

5. Make an entry in the file ORACLE\_HOME/as\_1/network/admin/tnsnames.ora for the Oracle 11g database that was created in Chapter2 (where the RWMS 13 database schema was installed).

6. Modify the file formsweb.cfg located at <MW\_HOME>/user\_projects/domains/ClassicDomain/config/fmwconfig/servers/WLS\_FORMS/applications/formsapp\_11.1.2/config/ to include an RWMS environment section at the end of this file. In the following example, square brackets highlight a separate environment in this file. In the RWMS environment section of the formsweb.cfg file, set up the variables **envfile** (from step 2 above), **width**, **height**, and **separateFrame** applet parameters, and the starting form for the RWMS application.

For example,

```
[rwms]
envfile=rwms.env
width=950
height=685
separateFrame=true
lookAndFeel=Oracle
colorScheme=swan
archive=frmall.jar,rwms-icons.jar
imagebase=codebase
form=logon_scr.fmx
```

If Oracle Single Sign-On is to be used with RWMS, do the following.

- Set **ssoMode** to true.
- If Resource Access Descriptors are allowed to be dynamically created, set **ssoDynamicResourceCreate** to true.

For example,

```
[rwms]
envfile=rwms.env
width=950
height=685
separateFrame=true
lookAndFeel=Oracle
colorScheme=swan
archive=frmall.jar,rwms-icons.jar
```

```
imagebase=codebase
form=logon_scr.fmx
ssoMode=true
```

To allow the **rwms-icons.jar** file to be picked up in your forms, the following line also needs to be added to the formsweb.cfg file:

```
# Forms applet archive setting for other clients (Sun Java Plugin,
Appletviewer, etc)
archive=frmall.jar,rwms-icons.jar
```

7. If NLS\_LANG is NOT set in the ORACLE\_HOME/forms/server/rwms.env, copy the RWMS keyboard-mapping file from  
INSTALL\_DIR/base/sample\_files/fmrweb.res to  
ORACLE\_HOME/forms/admin/resource/US.  
If NLS\_LANG is set in the ORACLE\_HOME/forms/server/rwms.env file, copy the RWMS keyboard-mapping file from  
INSTALL\_DIR/base/sample\_files/fmrweb\_utf8.res to  
ORACLE\_HOME/forms/admin/resource/US.
8. Load RWMS by entering the following URL in a Web browser.

---

**Note:** Prior to testing, the JRE 1.7.0+ plug-in needs to be installed on the client machine. The plug-in can be downloaded from the Java Web site (<http://www.oracle.com/technetwork/java/index.html>).

---

`http://<server>:<port>/forms/frmservlet?config=<env>`

Where,

- server is the name or IP address of the server where Oracle Forms Services 11g Release 2 (11.1.2.1) is running.
- port is the "Listen" value in ORACLE\_HOME/user\_projects/domains/ClassicDomain/config/config.xml It is the port listed for WLS\_FORMS.
- env is the name of the environment in brackets in formsweb.cfg (from step 5 above). For example, `http://server:9001/forms/frmservlet?config=rwmswls`.

---

**Note:** If RWMS is configured to use SSO (`ssoMode = true`), then the Oracle Single Sign-On page should appear. Log on using a valid user ID / password found in the OID LDAP server.

---

The first time RWMS is accessed, the user is prompted with the following security warning. Click **Yes**.



#### Security Warning Message

If Single Sign-On is not used, or if a Resource Access Descriptor has not been set up for RWMS for this user and `ssoDynamicResourceCreate` is set to true, then the RWMS logon form appears. Enter the relevant user name, password, and connect string information in the corresponding fields:

- Username – The RWMS Schema owner or additional Oracle user created.
- Password – Associated password for the user name.
- Connect String – Oracle database created in Chapter 1.

For example,

Username: RWMS13DEV

Password: retek

Connect String: prod\_db1

9. On the RWMS logon form, enter the relevant user name, password, and connect string in the corresponding fields:

- Username – RWMS Schema owner or additional Oracle user created.
- Password – Password associated with the user name.
- Connect String – Oracle database created in Chapter 1.

For example,

Username: RWMS13DEV

Password: retek

Connect String: prod\_db1

## Clustered Installations – Post-Installation Steps

If you are installing the RWMS application to a clustered Oracle Application Server environment, there are some extra steps you need to take to complete the installation. In these instructions, the application server node with the ORACLE\_HOME you used for the RWMS application installer is referred to as *master node*. All other nodes are referred to as *remote nodes*.

To complete the RWMS forms application install, the installer provided new versions of formsweb.cfg and the newly-created env files for the new RWMS installation. The entries added to formsweb.cfg and env files for these new environments should be copied from the master node to the remote nodes.

---

**Note:** The newly created env files will have a change to the FORMS\_PATH variable as well as entries appended to the end of the file.

---

---

**Note:** Do **NOT** copy the entire file from one node to another. Only copy the RWMS entries modified in these files by the installer. There is node-specific information in this file that is different between ORACLE\_HOME installations.

---

## Install the Online Help

To install the online help, do the following.

1. Log on to the WebLogic instance where the online help will be installed.
2. Select the WLS\_FORMS server, and click **Next**.
3. Click **Deployments**.
4. Click the **Install** button.
5. In the **Path** field, select the rwms-help.ear file. Leave the **Install this deployment as an application** check box selected and click **Next**.
6. Select the **rwms-help-server** created in step 2, and click **Next**.
7. Select deploy application
8. Select proper target
9. Select default settings and Activate changes (upper left)

## Install rwms-icons.jar

If the patch contains a new rwms-icons.jar, follow these steps to install it:

1. Copy the rwms-icons.jar from APP\_PATCH\_DIR/app-patch/<version>/web\_html/ and overwrite the one in \$ORACLE\_HOME/forms/java/
2. Bounce the WebLogic managed server that contains Forms (for example, WLS\_FORMS).

## Remove rwms13unix.conf from the forms configuration

If it exists, remove rwms13unix.conf from the forms configuration (\$DOMAIN\_HOME/config/fmwconfig/servers/WLS\_FORMS/applications/formsapp\_11.1.2/config/rwms13inst/rwms13unix.conf). To remove this file:

1. Delete rwms13unix.conf

```
rm /u00/webadmin/product/10.3.x/WLS_Forms/user_projects/domains/ClassicDomain/  
config/fmwconfig/servers/WLS_FORMS/applications/formsapp_11.1.2/config/rwms13inst  
/rwms13unix.conf
```

2. Take a backup of runtime httpd.conf.

```
cp /u00/webadmin/product/10.3.x/WLS_Forms/asinst_1/config/OHS/ohs1/httpd.conf  
/u00/webadmin/product/10.3.x/WLS_Forms/asinst_1/config/OHS/ohs1/httpd.conf.
```

3. vi http.conf

4. Delete the line with reference to rms13unix.conf

5. Save the file.

6. Restart the OHS.

## Test the RWMS Application

Oracle Retail provides test cases that allow you to smoke test your installation. See the My Oracle Support document, *Oracle Retail Merchandising Installation Test Cases* (ID 1277131.1.1).



---

---

## RWMS Reports Installation—Patch

RWMS 13.2.7 reports now supports ONLY BiPublisher 11g.

Upgrading from BiPublisher 10g to 11g is not trivial. Among other things, the BiPublisher report program in 10g is the <report\_name>.xdo file. In 11g, this <report\_name>.xdo report file gets split into two new folders, a <report\_name>.xdo folder along with a <report\_name>.xdm folder. Both of these two new folders have report files within them. Your BiPublisher 10g reports program will not work without a change in BiPublisher 11g.

---

---

**Note:** If BiPublisher application 11g is already deployed to a bipublisher managed server in Weblogic, you can directly go to the “Manually Copy Reports to Install Directory” section. If not, continue with the “BI Server Component Installation Tasks”.

---

---

### BI Server Component Installation Tasks

Oracle BI Publisher is used as the main RMS, RWMS, REIM, and SIM reporting engine and can be used in conjunction with external printing solutions like label printing. This section describes the installation of Oracle BI Publisher as a server application within WebLogic 10.3.6. One deployment of BI Publisher can be used for any of the RMS, RWMS, REIM, and SIM reports.

If you are installing BI Publisher as a part the Oracle OBIEE suite (which you will if installing BiPublisher 11g), refer to the appropriate Fusion Middleware guides for the installation of the product in a WebLogic server environment. Otherwise, you must perform the steps described in the next section to deploy Oracle BI Publisher 11g as a standalone web application into a WebLogic server environment.

### BiPublisher 11g – Installation Process Overview

Installing the BI Publisher server as a standalone web application in a WebLogic server involves the following tasks:

1. Run RCU to create BiPublisher related database schemas and other db objects.
2. Install Oracle BI EE under an existing Weblogic Server (WLS) 10.3.6 and choose “software only install”.
3. Configure Oracle BI EE, create default bifoundation\_domain and configure component “Business Intelligence Publisher” only.
4. Select the BIPlatform schema for update of the ORACLE 11.2.0.3 DB
5. Configure ports and document and test the URL’s that are created.

The following post-installation tasks are involved once BI Publisher has been installed:

6. Configure the BI Publisher repository. Set security model, add users, assign roles, add reports, add printers, set repository path, set data source, etc.
7. Set up the RWMS reports in BiPublisher report repository.
8. Set up for the RWMS application specific configuration files to integrate with BI Publisher.

## BiPublisher 11g – Install Oracle BI EE 11g

1. Run the Repository Creation Utility to create the BiPublisher-related database schemas and other database objects. Create the BIPlatform schema into an existing ORACLE 11.2.0.3 DB

**Note:** Download Repository Creation Utility software from <http://www.oracle.com/technetwork/middleware/bi-enterprise-edition/downloads/bi-downloads-1525270.html>. Install it on your desktop


2. Export your DISPLAY.  
Ex: Export DISPLAY=10.141.10.110:0.0
3. Go to \$RCU\_HOME/bin  
Ex: /linux/x86\_64/ofm\_11g/RCU\_11.1.1.7/rcuHome/bin>  
Start RCU: ./rcu




4. Click Next.




5. Launch Oracle BI EE RCU Repository Creation Utility to create the Oracle BI EE schemas need for the Oracle BI EE BiPublisher installation. On this screen select “Create Repository”.

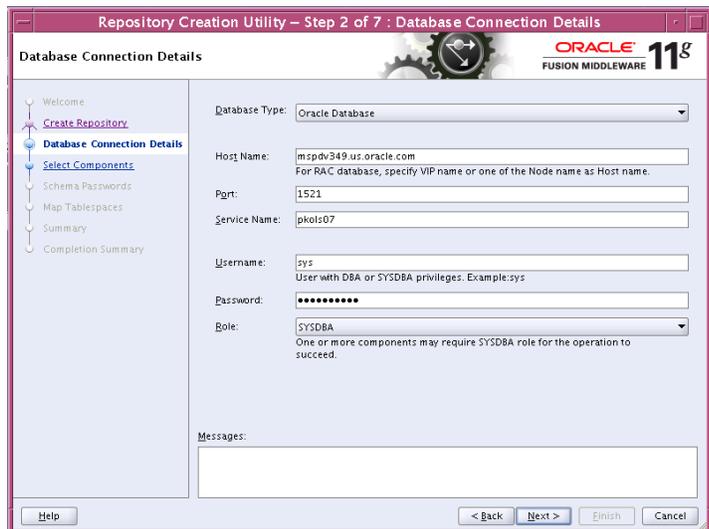

6. On the Database Connection Details screen, enter your Oracle Database information

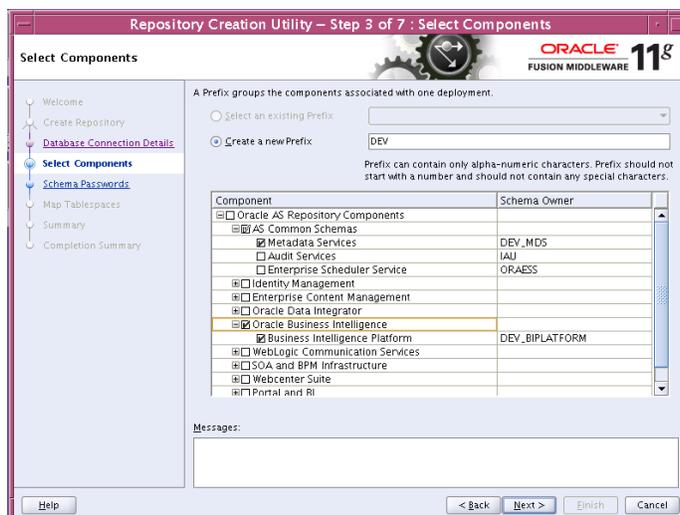


7. On the Select Components screen, select “Oracle Business Intelligence” check box.

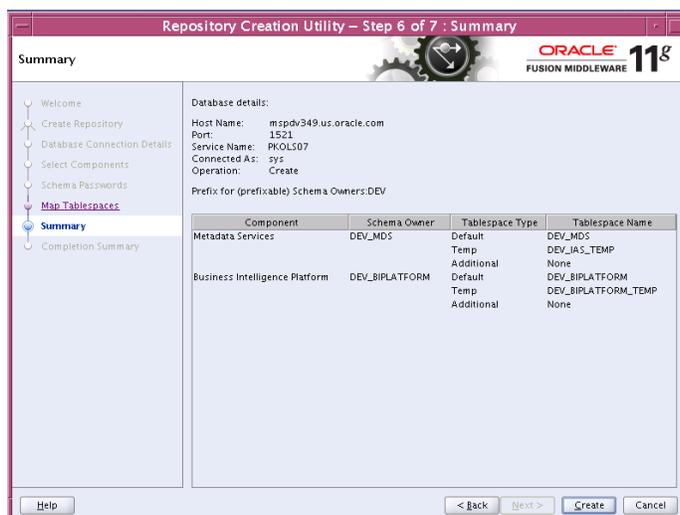


The Summary of the Components created by the RCU tool is displayed.

8. Install a new instance of Weblogic Server 10.3.6 or use an existing one. Having one Weblogic Server for Oracle BI EE-BiPublisher 11g related items is recommended.
9. Install Oracle BI EE and select “Software Only Install”. You launch Oracle BI EE by going to OBIEE\_INSTALL/obiee11.1.1.7/bishiphome/Disk1 and entering:  
./runInstaller

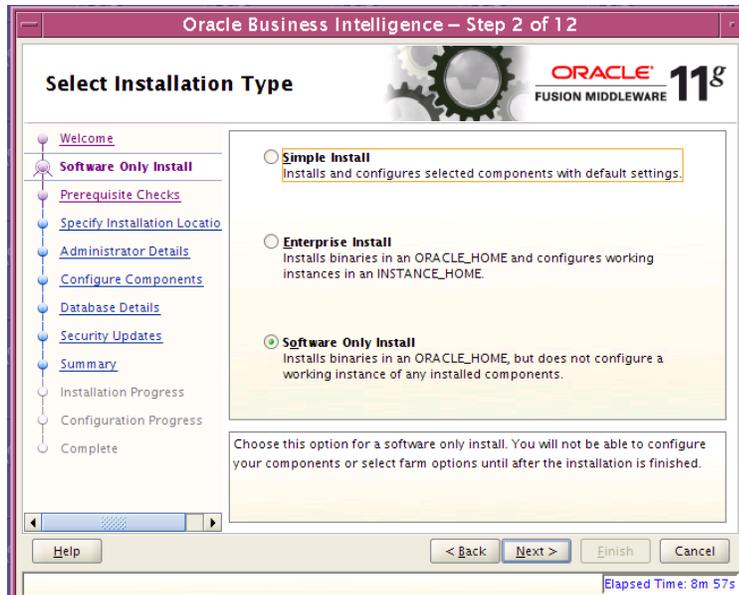

10. Configure Oracle BI EE, create default bifoundation\_domain and configure component “Business Intelligence Publisher” only.

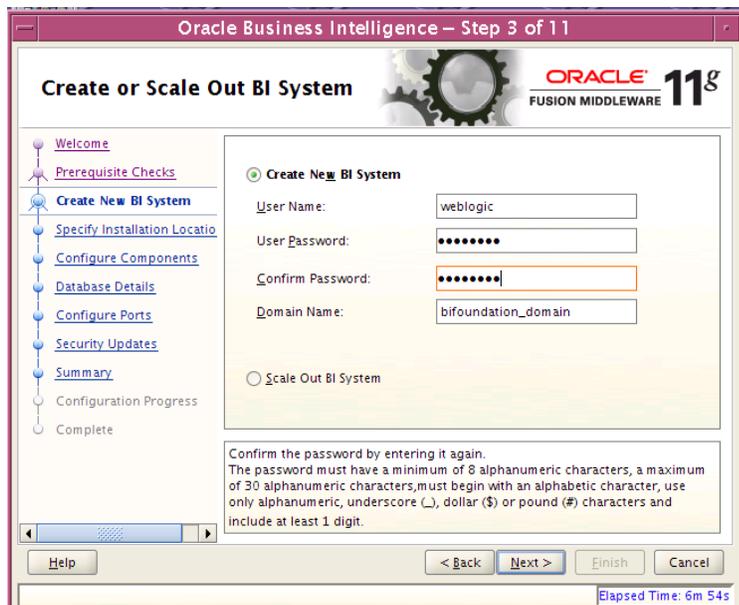

11. On the Create or Scale Out BI System screen, you are asked for the WebLogic password and provided with a recommended a Domain Name. Enter and confirm your WebLogic password and accept the recommended Domain Name; “bifoundation domain”




12. On the Configure Components screen, select only “Business Intelligence Publisher”
13. Configure your BI ports. This screen allows you to assign Oracle BI EE ports from the staticports.ini file.

This file is located in the Oracle BI EE software at:  
 /obiee11.1.1.7/bishiphome/Disk1/stage/Response/staticports.ini




14. Edit this file to make sure you will have the ports you want for your BiPublisher components. Otherwise the installer will assign default port numbers.
15. Document and test the URLs that are created.  
 This screen contains the URL’s for the components that got installed.

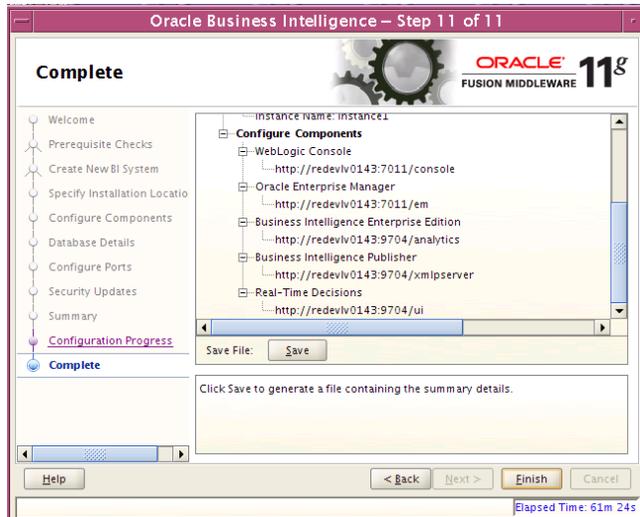

16. Save this screen, so that you know the right URL's for your installation.
17. To test your BIPublisher installation, launch xmlpserver. Login with the credentials you entered in your Oracle BI EE configuration (weblogic / password).


## ORACLE BI Publisher Enterprise

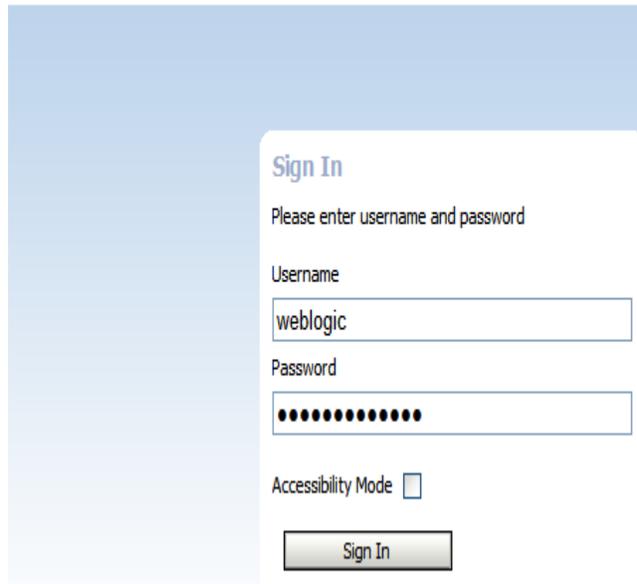


18. Post install steps: Configure the BI Publisher repository. After signon, select "Administration".



19. On the System Maintenance Section, press Server Configuration
20. Navigate to the Configuration Screen.

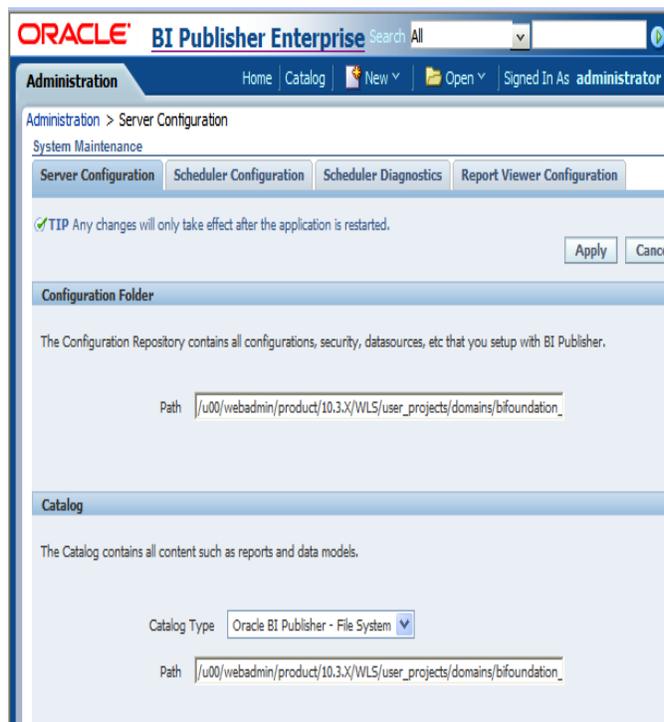

21. On this screen on the Configuration Folder section, enter the path to your repository. On the Catalog section enter Catalog Type: Oracle BI Publisher – File System from the drop down menu.  
This is the path you entered in the Configuration Section and Catalog Section:  
`$OBIEE_HOME/WLS/user_projects/domains/bifoundation_domain/config/bipublisher/repository`
22. Restart the BI Publisher after this change.
23. Post install step: Set BiPublisher security model

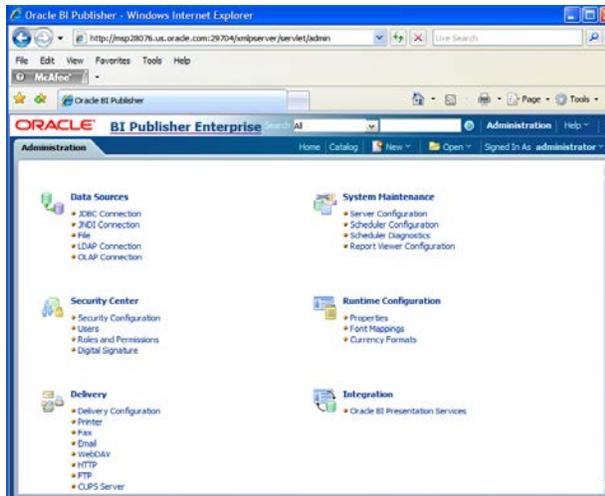

- a. On the BiPublisher 11g Administration Screen, click Security Configuration from the Security Center.



- b. Enable a superuser by checking the “Enable Local SuperUser” box and by entering name and password on the corresponding fields on this screen.
- c. Mark “Allow Guest Access” check box. Enter “Guest” as Guest Folder Name
- d. Scroll down the screen and locate the Authorization section:



- e. Select BI Publisher Security from the Security Model list.:
- f. The default user name for the BI Publisher Security Model is Administrator
- g. On the password text field, enter a value that you can remember. It is going to be the password for Login to xmlpserver.
- h. Save the changes and re-start the BIPublisher server.
- i. Launch xmlpserver. To Login you must use the new credentials that you set up in the former step: Username: Administrator Password: password.

---

---

**Note:** You will not be able to login to xmlpserver as weblogic any more because we have already changed the Security Model.

---

---



24. Post install step: Set the repository path.

**Example:**

/u00/webadmin/product/10.3.X/WLS/user\_projects/domains/bifoundation\_domain/config/bipublisher/repository In the Oracle BI EE filesystem you will find the repository in the following location:

\$OBIEE/wls/user\_projects/domains/bifoundation\_domain/config/bipublisher/repository

In the repository you will see the following directories:


- Admin
- DemoFiles
- Reports
- Tools
- Users

25. Post install step: Create role Bipub\_default\_role.

- a. From the xmlpserver Administration screen, scroll down to Security Center and click Roles and Permissions.



b. On the Roles and Permissions screen, click the Create Role button.

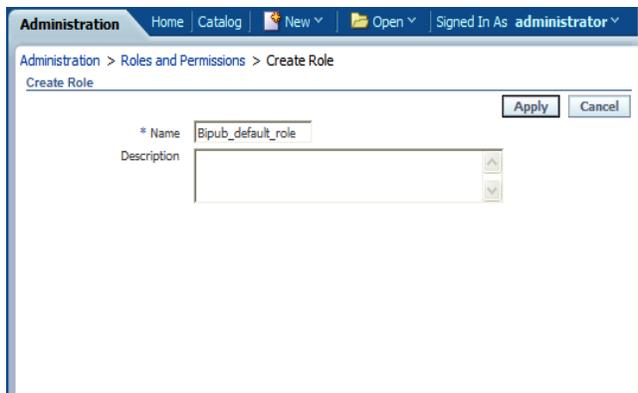


c. Create the Bipub\_default\_role. Enter in Create Role Section name of the role.


d. When the information has been entered press Apply changes.

26. Post install step: Assign BiPub system roles to the newly created Bipub\_default\_role.

a. To assign BiPub system roles to the newly create Bipub\_default\_role, go to Security Center section and navigate to the Roles and Permissions screen:

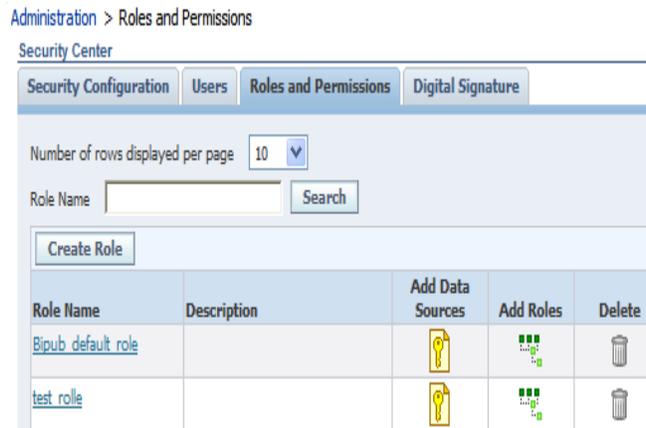

b. On the Roles and Permissions screen you should see the new role created: "Bipub\_default\_role". Add multiple roles to the Bipub\_Default\_Role by pressing the corresponding green icon on the Add Roles column

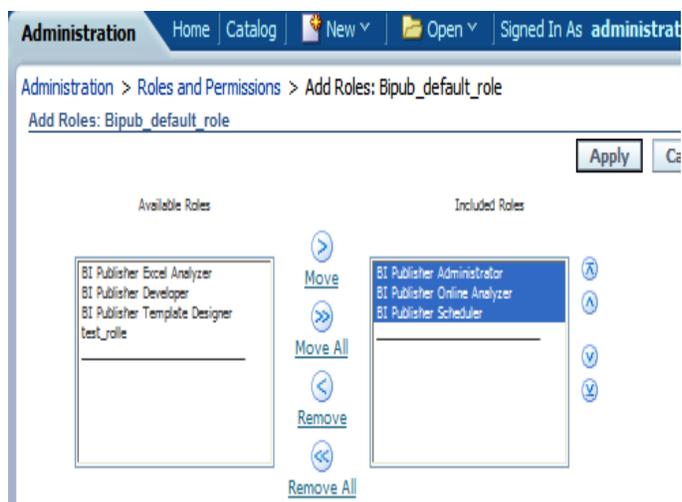


- c. From the “Available Roles” panel, select the ones needed for your reports and move them to the “Included Roles” panel
- d. Press the Apply button to save your changes.


27. Post install step: create Guest (XMLP\_GUEST) user.




- a. From the xmlpserver Administration screen scroll down to Security Center section and press Users to navigate to the next screen

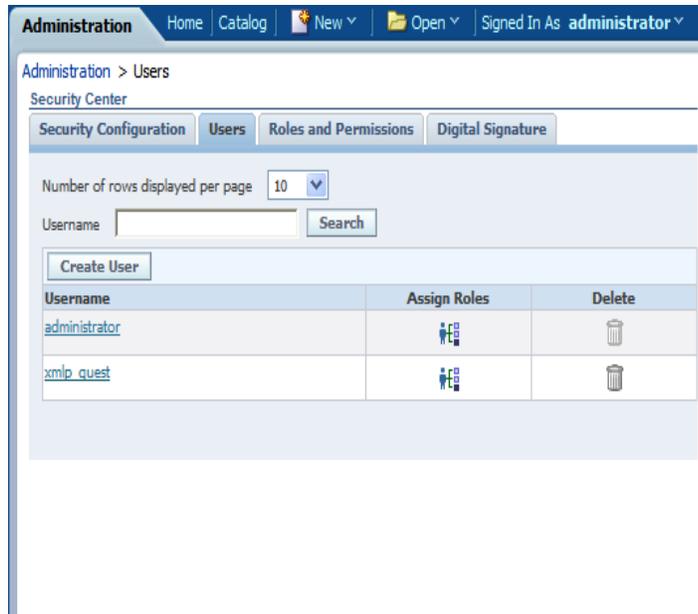

- b. Select the “Create User” button to create the “xmlp\_guest” user and save the changes
28. Post install step: Adding the Bipub\_default\_role to XMLP\_GUEST user.
  - a. Open the Users section:

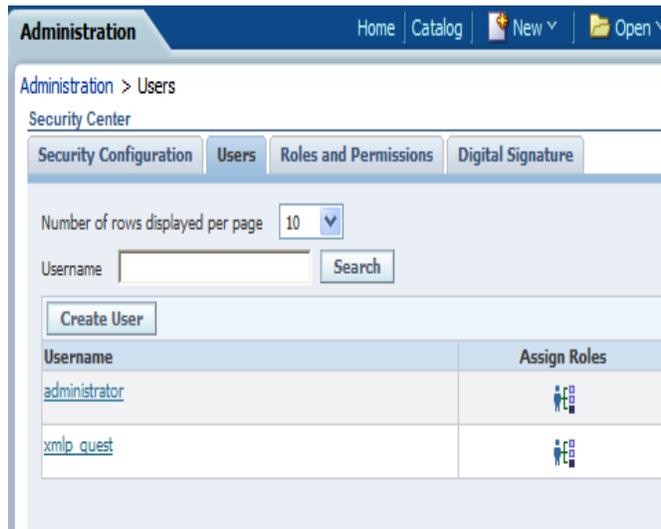

- b. For xmlp\_guest user, press on the “Assign Roles” icon to navigate to the next screen:

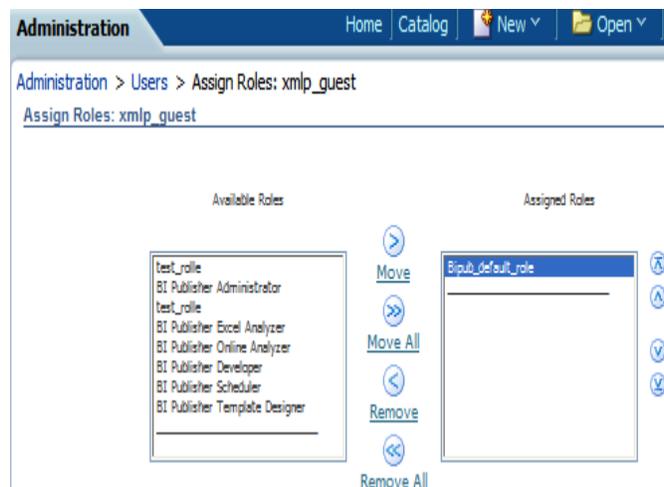

- c. On the Assign Roles screen, select the BiPub\_default\_role from the Available Roles panel to the “Assigned Roles” panel and press the Apply button to save your changes.

## Manually Copy Reports to Install Directory

If you followed the instructions under “[Option 1: Use Application Installer to Patch](#)” in the Chapter 5, “[Patch Application Server Installation Tasks](#)”, you can skip to the next section (“[BI Publisher 11g - Installing the RWMS BI Publisher Templates](#)”). If you followed “[Option 2: Compile RWMS Forms Directly](#),” you must manually copy the reports and related files to INSTALL\_DIR.

1. If the directories INSTALL\_DIR/base/reports/10g or INSTALL\_DIR/base/reports/11g exist follow these steps. Otherwise, skip to step 2:
  - a. Change directories to INSTALL\_DIR/base/reports
  - b. Remove the entire 10g directory if it exists. We will no longer ship 10g reports in future releases.
  - c. Move all of the directories in INSTALL\_DIR/base/reports/11g to INSTALL\_DIR/base/reports
  - d. Remove the empty INSTALL\_DIR/base/reports/11g directory.
2. If the directories INSTALL\_DIR/base/reports/10g or INSTALL\_DIR/base/reports/11g do not exist, and the reports under INSTALL\_DIR/base/reports/ are the 13.2.5 set of reports or earlier, delete all the directories under INSTALL\_DIR/base/reports/. All reports that were a part of 13.2.5 and earlier releases are 10g reports that will be completely replaced by 11g reports included in the 13.2.7 and future releases.
3. Copy the reports and extras directories from RWMS application patch APP\_PATCH\_DIR/app-patch/<version>/ to the reports and extras directories under INSTALL\_DIR/base/.

## BI Publisher 11g – Installing the RWMS BI Publisher Templates

This section describes how the RWMS report templates are installed into the appropriate BI server repositories. BI\_REPOSITORY refers to the BI Publisher reports repository.

Example:

```
/u00/webadmin/product/10.3.X/WLS/user_projects/domains/bifoundation_domain/  
config/bipublisher/repository/
```

Report files are placed in the directory, INSTALL\_DIR/base/reports, and must be copied into the BI\_REPOSITORY directory.

1. If it does not exist already, create the following directory  
<BI\_REPOSITORY>/Reports/Guest/RWMS13 in the BIPublisher repository.
2. Change directories to INSTALL\_DIR/base/reports/. This directory contains two subdirectories RWMS REPOSITORY and RWMS SYSTEM REPOSITORY. These two subdirectories will contain the correct report templates for its directory. NOTE: There is duplication of some report templates between the 2 directories – This is intentional and serves RWMS13 functional/technical requirements.
  - Copy each report directory (RWMS REPOSITORY and RWMS SYSTEM REPOSITORY) into the <BI\_REPOSITORY>/Reports/Guest/RWMS13 directory that was created above.

Example,

```
INSTALL_DIR/base/reports> cp -R * /u00/webadmin/  
product/10.3.X/WLS/user_projects/domains/bifoundation_domain/config/bipubl  
isher/Reports/Guest/RWMS13/
```

## BiPublisher 11g – Configuring the RWMS JDBC connection

Follow the below steps to configure JDBC connection for RWMS Data Source name. This is the data source that RWMS uses for RWMS reports.

1. Log on with the default user ID and passwords for BI Publisher using the administrative user and password configured previously.
2. Click the **Admin** tab and select the **JDBC Connection** hyperlink in the Data Sources lists. The following screen is displayed.

The screenshot shows the Oracle BI Publisher Administration console. The breadcrumb trail is Administration > JDBC > Update Data Source: RWMS. The page title is 'Update Data Source: RWMS'. There are 'Apply' and 'Cancel' buttons in the top right. The 'General' section contains the following fields:

- Data Source Name: RWMS
- \* Driver Type: Oracle 11g
- \* Database Driver Class: oracle.jdbc.OracleDriver
- \* Connection String: jdbc:oracle:thin:@redevl0170.us.oracle.com:1521:qaols08
- Use System User:
- \* Username: wms01user
- Password: [masked]
- Pre Process Function: [empty]
- Post Process Function: [empty]
- Use Proxy Authentication:
- Test Connection button

The 'Backup Data Source' section is also visible, with a 'Use Backup Data Source' checkbox and fields for Connection String, Username, and Password, along with a 'Test Connection' button.

3. Enter the appropriate details for the RWMS data source. The Data Source Name must be RWMS for the RWMS reports to work. Once the data is entered, click Test Connection to test the connection. The syntax for the connection string is as follows:  
`jdbc:oracle:thin:@<hostname>:<port>:<dbsid>`

Below is an example of the connection string as depicted in the screen shot:

`jdbc:oracle:thin:@redevl0170.us.oracle.com:1521:qaols08`

4. Select **Allow Guest access** checkbox.



5. Click **Apply** to save the information.

## Verify Oracle BI Publisher Set Up for RWMS Reports

Verify that Oracle BI Publisher has been set up correctly as follows:

1. Click the **Admin** tab. Under System Maintenance, click **Report Repository**. The Path variable should be set as part of the BI Publisher installation, REPORTS\_DIR.
2. Update the file  
`<MW_HOME>/user_projects/domains/ClassicDomain/config/fmwconfig/servers/WLS_FORMS/applications/formsapp_11.1.2/config/rwms.env` with the following variables:

---

**Note:** All of the variables described below are explained in more detail under the “Configuring the Forms Installation Environment Files” section of this document.

---

- RWMS\_REPORTS\_TEMP – `<MW_HOME>/user_projects/domains/ClassicDomain/servers/WLS_FORMS/tmp/_WL_user/formsapp_11.1.2/spn4wj/war/rwms/reptemp/`.

---

**Note:** create reptemp folder in the above directory location.

---

- RWMS\_REPTEMP\_ALIAS – `/forms/rwms/reptemp/`
- RWMS\_REPORTS\_URL – `http://<server>:<port>/xmlpserver/servlet/report?f=/Guest/RWMS/RWMS+REPOSITORY`  
 – Where 7001 is the port where xmlpserver has been deployed.
- RWMS\_FORMS\_SERVER=`http://<Forms_server>:<Forms server port>/`
- RWMS\_BI\_USER – Administrator user name.
- RWMS\_BI\_PWD – Associated administrator password.
- RWMS\_SYS\_REPORTS\_DIR – `/Guest/RWMS/RWMS SYSTEM REPOSITORY/`
- RWMS\_SCHEDULE\_END\_POINT\_URL – <http://<server><port>/xmlpserver/services/v2/ScheduleService?wsdl>
- RWMS\_REPORT\_END\_POINT\_URL=`http://<server><port>/xmlpserver/services/v2/ReportService?wsdl` Server and port refer to where the xmlp server installation and port have been deployed.

## Installing WebUtil Support Libraries

The RWMS application provides a means to upload or view files through a web browser and using its database as a storage mechanism. This means that the user can browse files in his local drives and select which ones to be uploaded and at the same time, download files from the database and save it in his local drive for viewing.

WebUtil is a small Java class library that is used for this purpose and will need the following configuration tasks to integrate it into the RWMS application environment.

To install WebUtil follow the instructions published by Oracle already located in a subdirectory of the base FORMS\_PATH directory specified in the <INSTALLATION\_NAME>.env file. The FORMS\_PATH structure will be different for installation, but in every case it will specify a path similar to the following:  
/u00/webadmin/product/10.3.x/WLS\_Forms/as\_1/forms

Following the sample above the instruction documents will be located in the following directory:

/u00/webadmin/product/10.3.x/WLS\_Forms/as\_1/forms/doc/US/fmdevhlp/web\_util.jar

The following steps below are a quick reference on what needs to be done for the installation and configuration of WebUtil for RWMS. It is a very high level summary of what needs to be done for the documentation packaged with the Oracle Forms installation – Some of the steps for doing this are also embedded in the sections below as well to assist in making sure nothing was missed. The following is a checklist after the section on “Configuring Forms to use BI and WebUtil” is the next section is complete:

- Verify you executed the create\_webutil\_db.sql
- Verify you moved jacob.jar to forms/java folder and also signed it.
- Verify you modified the <INSTALLATION\_NAME>.env file to correct jacob.jar location in CLASSPATH.
- Verify you compiled webutil.pll
- Verify you edited the webutil.cfg file and set transfer.database.enabled=TRUE

## Configuring Forms to use BI and WebUtil

This section provided information about how to configure forms for BI and WebUtil.

### Check the Configuration of formsweb.cfg

The formsweb.cfg file is modified by the application installer to add the appropriate entries for the WebUtil and RWMS Forms configurations. Please validate the file to ensure that the following items have been updated accordingly by the installer. In italics and highlighted are post installation configuration changes.

The file is typically found within the WebLogic domain configuration folder in the subdirectory

.../fmwconfig/servers/<SERVER\_NAME>/applications/formsapp\_11.1.2/config directory and is named from the <INSTALLATION\_NAME> value.

For example:

```
/u00/webadmin/product/10.3.x/WLS_Forms/user_projects/domains/ClassicDomain/config/
fmwconfig/servers/WLS_FORMS/applications/formsapp_11.1.2/config/
```

The following is a sample from **formsweb.cfg**.

```
[webutil]
WebUtilArchive=frmwebutil.jar,jacob.jar
WebUtilLogging=off
WebUtilLoggingDetail=normal
WebUtilErrorMode=Alert
WebUtilDispatchMonitorInterval=5
WebUtilTrustInternal=true
WebUtilMaxTransferSize=16384
baseHTML=webutilbase.htm
baseHTMLjpi=webutiljpi.htm
archive=frmall.jar
lookAndFeel=oracle

[rwms13inst]
envfile=./rwms13inst/rwms13inst.env
width=950
height=685
separateFrame=true
lookAndFeel=Oracle
colorScheme=swan
archive=frmall.jar,icons.jar,frmwebutil.jar,jacob.jar
form=logon_scr.fmx
userid=@rwms13inst
#ssoMode=true
#ssoDynamicresourceCreate=true

[rwms13inst_hh]
envfile=./rwms13inst/rwms13inst.env
width=100%
height=100%
separateFrame=false
form=hh_intro_s.fmx
lookAndFeel=Oracle
Logo=false
colorScheme=swan
archive=frmall.jar,icons.jar
imageBase=codebase
```

```

background=false
ShowMenuBar=false
ShowStatusBar=false
baseHTMLjinitiator=basejini.htm
baseHTML=base.htm
otherparams=term=/u00/webadmin/product/10.3.x/WLS_Forms/user_projects/domains/Clas
sicDomain/config/fmwconfig/servers/WLS_FORMS/applications/formsapp_11.1.2/config/r
wms13inst/fmrweb.res usesdi=YES
splashScreen=false
HTMLbodyAttrs=scroll="no" topmargin="0" leftmargin="0" marginheight="0"
marginwidth="0" onload="window.moveTo(0,0);"
userid=/@rwms13inst
#ssoMode=true
#ssoDynamicresourceCreate=true

```

```

[rwms13inst_tm]
envfile=./rwms13inst/rwms13inst.env
width=100%
height=100%
separateFrame=false
form=tm_intro_s.fmx
Logo=false
lookAndFeel=Oracle
archive=frmall.jar,icons.jar
imageBase=codebase
background=false
colorScheme=swan
ShowMenuBar=false
ShowStatusBar=false
baseHTMLjinitiator=basejini.htm
baseHTML=base.htm
otherparams=term=/u00/webadmin/product/10.3.x/WLS_Forms/user_projects/domains/Clas
sicDomain/config/fmwconfig/servers/WLS_FORMS/applications/formsapp_11.1.2/config/r
wms13inst/fmrweb.res usesdi=YES
splashScreen=false
HTMLbodyAttrs=scroll="no" topmargin="0" leftmargin="0" marginheight="0"
marginwidth="0" onload="window.moveTo(0,0);"
userid=/@rwms13inst
#ssoMode=true
#ssoDynamicresourceCreate=true

```

```

[rwms13inst_wr]
envfile=./rwms13inst/rwms13inst.env
width=100%
height=100%
separateFrame=false
form=wr_intro_s.fmx
Logo=false
background=false
lookAndFeel=Oracle
archive=frmall.jar,icons.jar
imageBase=codebase
colorScheme=swan
ShowMenuBar=false
ShowStatusBar=false
baseHTMLjinitiator=basejini.htm
baseHTML=base.htm
otherparams=term=/u00/webadmin/product/10.3.x/WLS_Forms/user_projects/domains/Clas
sicDomain/config/fmwconfig/servers/WLS_FORMS/applications/formsapp_11.1.2/config/r
wms13inst/fmrweb.res usesdi=YES
splashScreen=false
HTMLbodyAttrs=scroll="no" topmargin="0" leftmargin="0" marginheight="0"
marginwidth="0" onload="window.moveTo(0,0);"

```

```
userid=@rwms13inst
#ssoMode=true
#ssoDynamicresourceCreate=true
```

## Configuring the Forms Installation Environment Files

This section outlines the entries that need to be updated in the <INSTALLATION\_NAME>.env file. The file is typically found within the WebLogic domain configuration folder in the subdirectory

..../fmwconfig/servers/<SERVER\_NAME>/applications/formsapp\_11.1.2/config directory and is named from the <INSTALLATION\_NAME> value. For example:

```
/u00/webadmin/product/10.3.x/WLS_Forms/user_projects/domains/ClassicDomain/config/
fmwconfig/servers/WLS_FORMS/applications/formsapp_11.1.2/config/rwms13inst/
```

<b>Field Title</b>	RWMS_SCHEDULE_END_POINT_URL
<b>Field Description</b>	This field specifies the BI Publisher wsds that should be used by RWMS to schedule a report.
<b>Example</b>	<a href="http://&lt;BI_Publisher_Server&gt;:&lt;port&gt;/xmlpserver/services/v2/ScheduleService?wsdl">http://&lt;BI_Publisher_Server&gt;:&lt;port&gt;/xmlpserver/services/v2/ScheduleService?wsdl</a>

<b>Field Title</b>	RWMS_REPORT_END_POINT_URL
<b>Field Description</b>	This field specifies the BI Publisher wsds that should be used by RWMS to execute a report.
<b>Example</b>	<a href="http://&lt;BI_Publisher_Server&gt;:&lt;port&gt;/xmlpserver/services/v2/ReportService?wsdl">http://&lt;BI_Publisher_Server&gt;:&lt;port&gt;/xmlpserver/services/v2/ReportService?wsdl</a>

<b>Field Title</b>	RWMS_REPORTS_URL
<b>Field Description</b>	This field points to BI Publisher URL location for the RWMS reports repository.
<b>Example</b>	<a href="http://&lt;BI_Publisher_Server&gt;:&lt;Port&gt;/xmlpserver/servlet/report?f=/Guest/RWMS13/RWMS+REPOSITORY">http://&lt;BI_Publisher_Server&gt;:&lt;Port&gt;/xmlpserver/servlet/report?f=/Guest/RWMS13/RWMS+REPOSITORY</a>

<b>Field Title</b>	RWMS_REPORTS_TEMP
<b>Field Description</b>	This is for specifying a subdirectory of the application war files. It used as a drop off location for reports generated in BI publisher so that the application server can pick them up and display them to the users.
<b>Example</b>	/u00/webadmin/product/10.3.x/WLS_Forms/user_projects/domains/ClassicDomain/servers/WLS_FORMS/tmp/_WL_user/formsapp_11.1.2/spn4wj/war/rwms/reptemp/

<b>Field Title</b>	RWMS_BI_USER
<b>Field Description</b>	<p>The installer now uses the Java wallet files for passing the correct credentials to BI Publisher. This is the account ID of the BI User account. It is not mandatory if the wallet mechanism is in use.</p> <p>NOTE: The RWMS installer by default does not even create this entry in the .env file. It is used as a literal string when the other .env file variable RWMS_WALLET_LOGON=FALSE</p>

<b>Field Title</b>	RWMS_BI_PWD
<b>Field Description</b>	<p>The installer already correctly sets the alias so no changes are necessary. It is used to pass credentials to BI Publisher via its web services.</p> <p>NOTE: If the .env file variable RWMS_WALLET_LOGON is set to FALSE this variable will be used by the application as a literal string and needs to be set as well as RWMS_BI_USER in order for BI Publisher to work.</p>

<b>Field Title</b>	RWMS_DB_CONNECT
<b>Field Description</b>	<p>This is set to the Java wallet alias that was created by the installer. It is used in the purging of cont_labels_to_print table by passing a fully qualified database connection when labels are printed via the RWMS application.</p> <p>NOTE: If the .env file variable RWMS_WALLET_LOGON is set to FALSE this variable will be used by the application as a literal string.</p>

<b>Field Title</b>	RWMS_WALLET_PATH
<b>Field Description</b>	This variable is used by the application to determine where the wallet is located on the server.
<b>Example</b>	RWMS_WALLET_PATH=/projects/rwms13.2/qa3auto/forms/wallet

<b>Field Title</b>	RWMS_WALLET_PARTITION
<b>Field Description</b>	This variable is used by the application to acquire the correct credentials from the wallet by specifying what partition is to be used.
<b>Example</b>	RWMS_WALLET_PARTITION=rwms13inst

<b>Field Title</b>	RWMS_WALLET_LOGON
<b>Field Description</b>	This variable is used by the application to determine if it should consider the RWMS_BI_USER – RWMS_BI_PWD – and RWMS_DB_CONNECT variables as wallet aliases or string values. If TRUE: The RWMS_BI_USER will be ignored. The RWMS_BI_PWD and RWMS_DB_CONNECT will be defined as wallet aliases. There are notes at the end of this document regarding how to set up the wallet aliases. If FALSE: All three variables will require literal string values.

<b>Field Title</b>	RWMS_SYS_REPORTS_DIR
<b>Field Description</b>	This variable is set to the directory within BI Publisher in which the reports reside for process dependent reports. Definition of reports that go into this file will be illustrated later.
<b>Example</b>	/Guest/RWMS13/RWMS SYSTEM REPOSITORY/

<b>Field Title</b>	RWMS_FORMS_SERVER
<b>Field Description</b>	The port needs to reflect the port the application URL will be using. The rest of it is the first part of the forms application URL.
<b>Example</b>	http://mspdv351:8888/

<b>Field Title</b>	RWMS_REPTEMP_ALIAS
<b>Field Description</b>	This variable is used by the forms application server so that it knows where to pick the reports when the forms server renders the report to the user.
<b>Example</b>	/forms/rwms/reptemp/

<b>Field Title</b>	RF_LAUNCH_VALUE_ALIAS
<b>Field Description</b>	This variable is used by the forms application server to find the RF launch screen modules and render them to the user.
<b>Example</b>	/forms/rwms/rf_launch/

Field Title	CLASSPATH
<b>Field Description</b>	<p>You will need to add the jars listed below:</p> <p><b>jacob.jar</b> For some reason this jar is not already in the classpath on some servers – To make sure this is not an issue go find it on the server and put it in the extras directory.</p> <p><b>bihelper.jar</b> This Jar needs to be extracted in the directory it is located in. You may also have to physically go get this file and put it in here. NOTE: Put it in the extras directory.</p> <p>The <b>wmsSecurity.jar</b> is already being placed there by the installer. This jar needs to be extracted in the directory it is located in. The wmsSecurity.jar must be added to the default CLASSPATH as shown in the example below.</p> <p>The following list of jar files already exist on the server but need to be located and added to the CLASSPATH as they are found on the server.</p> <ul style="list-style-type: none"> <li>• jrf.jar</li> <li>• weblogic.jar</li> <li>• com.oracle.toplink_1.0.0.0_11-1-1-5-0.jar</li> <li>• org.eclipse.persistence_1.1.0.0_2-1.jar</li> <li>• javax.persistence_1.0.0.0_2-0-0.jar</li> <li>• xmlparserv2.jar</li> <li>• xml.jar</li> <li>• orai18n-mapping.jar</li> <li>• com.bea.core.antlr.runtime_2.7.7.jar</li> </ul>

The following is an example of the entries used for a working <INSTALLATION\_NAME>.env file:

```
...
CLASSPATH=u00/webadmin/product/wls_retail/as_1/forms/j2ee/frmsrv.jar:/u00/webadmin/product/wls_retail/as_1/jlib/ldapjclnt11.jar:/u00/webadmin/product/wls_retail/as_1/jlib/debugger.jar:/u00/webadmin/product/wls_retail/as_1/jlib/ewt3.jar:/u00/webadmin/product/wls_retail/as_1/jlib/share.jar:/u00/webadmin/product/wls_retail/as_1/jlib/utj.jar:/u00/webadmin/product/wls_retail/as_1/jlib/zrclient.jar:/u00/webadmin/product/wls_retail/as_1/reports/jlib/rwrn.jar:/u00/webadmin/product/wls_retail/as_1/forms/java/frmwebutil.jar:/u00/webadmin/product/wls_retail/as_1/jlib/start_dejvm.jar:/u00/webadmin/product/wls_retail/as_1/opmn/lib/optic.jar:/u00/webadmin/product/wls_retail/oracle_common/modules/oracle.jrf_11.1.1/jrf.jar:/u00/webadmin/product/wls_retail/wlserver_10.3/server/lib/weblogic.jar:/u00/webadmin/product/wls_retail/modules/com.oracle.toplink_1.0.0.0_11-1-1-5-0.jar:/u00/webadmin/product/wls_retail/modules/org.eclipse.persistence_1.1.0.0_2-1.jar:/u00/webadmin/product/wls_retail/modules/javax.persistence_1.0.0.0_2-0-0.jar:/u00/webadmin/product/wls_retail/oracle_common/modules/oracle.xdk_11.1.0/xmlparserv2.jar:/u00/webadmin/product/wls_retail/oracle_common/modules/oracle.xdk_11.1.0/xml.jar:/u00/webadmin/product/wls_retail/oracle_common/modules/oracle.nlsrtl_11.1.0/orai18n-mapping.jar:/u00/webadmin/product/wls_retail/modules/com.bea.core.antlr.runtime_2.7.7.jar:/vol.rtk/pkg_mocks/rwms132/install/base/retail-public-security-api/lib/retail-public-security-api.jar:/vol.rtk/pkg_mocks/rwms132/install/base
```

```
/extras/bihelper.jar:/vol.rtk/pkg_mocks/rwms132/install/base
/extras/wmsSecurity.jar
...
...
#RWMS Application Server added lines

NLS_DATE_FORMAT=DD-MON-RR
NLS_LANG=AMERICAN_AMERICA.UTF8

FORMS_USERNAME_CASESENSITIVE=1
FORMS_REJECT_GO_DISABLED_ITEM=FALSE

ORACLE_RWMS_EXTRAS=/vol.rtk/pkg_mocks/rwms132/install/base/extras

RWMS_REPORTS_URL=http://mspdv351.us.oracle.com:9001/xmlpserver/servlet/re
port?f=/Guest/RWMS13/RWMS+REPOSITORY/
RWMS_REPORTS_TEMP=/scratch/u00/webadmin/product/wls_retail/user_projects/
domains/ClassicDomain/servers/WLS_FORMS/tmp/_WL_user/formsapp_11.1.2/spn4
wj/war/rwms/reptemp/

RWMS_SYS_REPORTS_DIR=/Guest/RWMS13/RWMS SYSTEM REPOSITORY/
RWMS_SCHEDULE_END_POINT_URL=http://mspdv351.us.oracle.com:9704/xmlpserver
/services/v2/ScheduleService?wsdl
RWMS_REPORT_END_POINT_URL=http://mspdv351.us.oracle.com:9704/xmlpserver/s
ervices/v2/ReportService?wsdl

RWMS_WALLET_PATH=/vol.rtk/pkg_mocks/rwms132/install/base/.javawallet
RWMS_WALLET_PARTITION=rwms13inst
RWMS_WALLET_LOGON=TRUE
RWMS_BI_USER=
RWMS_BI_PWD=BI_ALIAS
RWMS_DB_CONNECT=RWMS132MOCK_pkols07
RWMS_FORMS_SERVER=http://mspdv351.us.oracle.com:9001/
RWMS_REPTEMP_ALIAS=/forms/rwms/reptemp/
RF_LAUNCH_VALUE_ALIAS=/forms/rwms/rf_launch/
```

## Adding Radio Frequency Launch Configurations

The RF Launch Screen is used as an entry point for RF devices to the RWMS application when users first log on to the terminal server. It is how the system knows what type of device is accessing the RWMS application as well as set system variables according to the type of equipment being used. The RWMS installer already sets this up with corresponding formsweb.cfg and .env file entries. It is necessary to know how to set these up however so that other devices can be added.

### File Placement

To place files, complete the following steps.

---

---

**Note:** Instructions for placing files are included in the steps for installing BI Publisher. If you have already completed BI Publisher installation, you can skip this step.

---

---

1. On the application server in the forms application server base directory you will need to create the following directory

/rwms/rf\_launch/

Example:

/u00/webadmin/product/10.3.x/WLS\_Forms/user\_projects/domains/ClassicDomain/servers/WLS\_FORMS/tmp/\_WL\_user/formsapp\_11.1.2/e18uoi/war/rwms/rf\_launch

2. Place the following files in the directory that was created during this step.

- close.htm

---

---

**Warning:** Do not open the close.htm file. It is designed to automatically shut down the computer that opens it. Use a text editor to view the contents as needed.

---

---

- oracle\_logo.jpg
- rwms\_rf\_menu.htm

### Configure .env file variables

See notes above for .env file updates.

### Update the RF launch modules

The close.htm, oracle\_logo.jpg, and rwms\_rf\_menu.htm all need to be placed in the location specified by the rf\_launch\_value alias in the httpd.conf. The rwms\_rf\_menu.htm will then need to be configured to point to launch the correct URL's based on the names of the URL's in the formsweb.cfg file, and the port specified in the httpd.conf file. The variables that need to be changed are listed below.

- var hh\_device =  
"http://<Server\_Name>:<port>/forms/frmservlet?config=<INSTALLATION\_NAME>\_hh";
- var tm\_device =  
"http://<Server\_Name>:<port>/forms/frmservlet?config=<INSTALLATION\_NAME>\_tm";

- `var wr_device =  
"http:<Server_Name>:<port>/forms/frmservlet?config=<INSTALLATION_NAME>_wr";`
- `var exit_script =  
"http://<Server_Name>:<port>/forms/rwms/rf_launch/close.htm";`



## Appendix: RWMS Database Patch Installer Screens

The following details about your environment are necessary for the installer to successfully patch the RWMS database schema.

### Screen: Database Schema Details


The screenshot shows a window titled "Oracle Retail Warehouse Management System Patch" with the Oracle logo at the top. Below the logo is a section titled "RWMS Database Schema Details". The text in this section reads: "Please provide information on a pre-existing database user for this RWMS installation. The installer will authenticate as this user and create the RWMS database objects." There are three input fields: "RWMS schema" with the value "RWMS132DEV", "RWMS schema password" with masked characters "\*\*\*\*\*", and "RWMS Oracle SID" with the value "rwm sdb". At the bottom of the window are four buttons: "Cancel", "Back", "Next", and "Install".

<b>Field Title</b>	RWMS schema
<b>Field Description</b>	Provide the RWMS database user here. The installer logs into the database as this user to create the RWMS schema. This user must already exist in the database when the RWMS database schema installer is run.
<b>Example</b>	RWMS132DEV

<b>Field Title</b>	RWMS schema password
<b>Field Description</b>	Database password for the RWMS schema Owner.


<b>Field Title</b>	RWMS Oracle SID
<b>Field Description</b>	Oracle system identifier for the database where the RWMS patch will be applied.
<b>Example</b>	rwmsdb

**Screen: Apply an RWMS DB Patch**

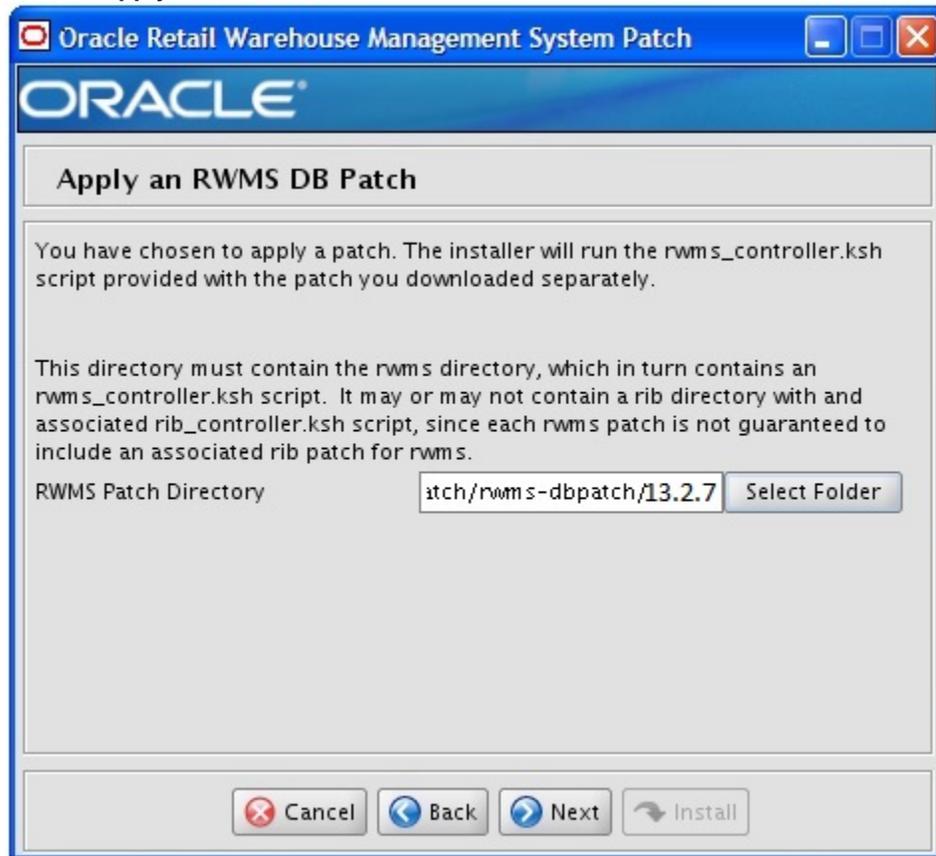

<b>Field Title</b>	RWMS Patch Directory
<b>Field Description</b>	Provide the directory path to the RWMS patch you want to install. The installer runs only the patch you provide. <b>Note:</b> The directory you choose must contain <code>rwms/rwms_controller.ksh</code> , and may contain <code>rib/rib_controller.ksh</code> .
<b>Example</b>	<code>/path/to/rwms/dbschemapatch/rwms-dbpatch/&lt;version&gt;</code> for all 13.2.x patches <b>Note:</b> The patch option is intended for patches starting with 13.2.4.

Screen: Continue RWMS DB Patch

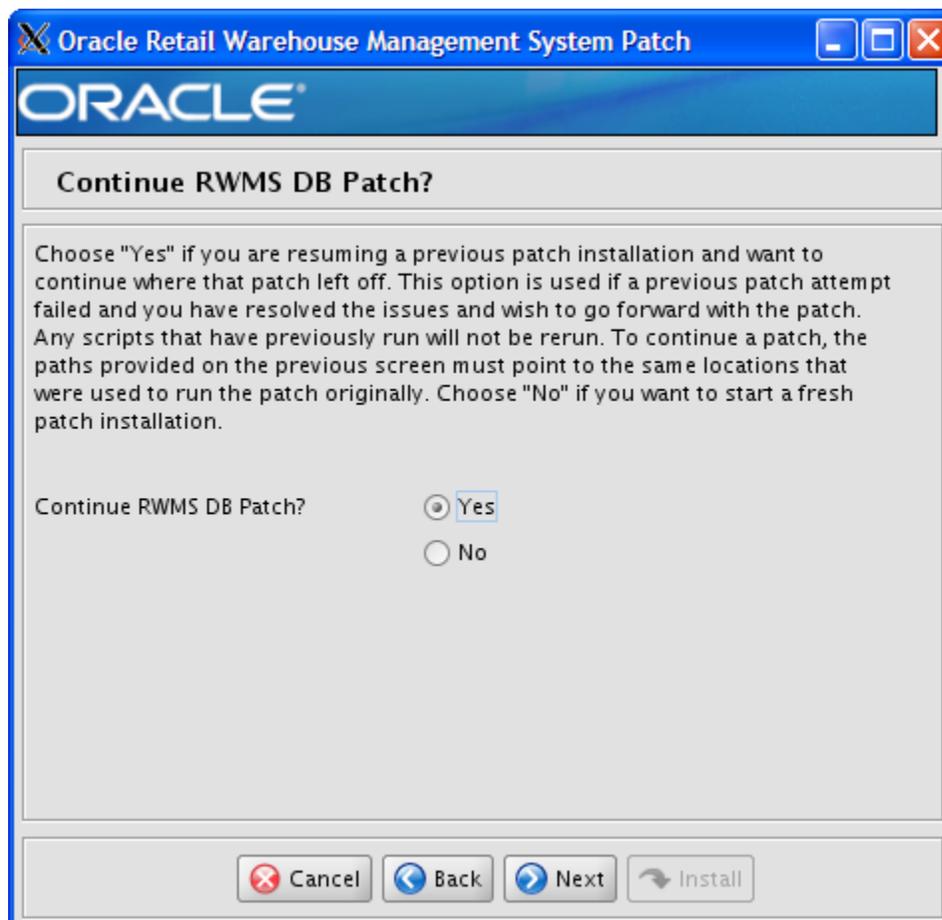

<b>Field Title</b>	Continue RWMS DB Patch?
<b>Field Description</b>	<p>The patch process allows you to continue a previously run patch if it stopped before completion or failed. If Yes is selected, any scripts that were previously run for the RWMS patch will be skipped. If No is selected, the patch will start from the beginning.</p> <p><b>Note:</b> To continue a patch, the content of the “processed” directories in the RWMS Patch chosen on the previous screen must be the same as it was after the previous patch was stopped. If you choose No, this directory will be cleared, and you will not be able to continue this patch in the future.</p>

## Appendix: RWMS Application Installer Screens

### Screen: Oracle Customer Information

For information about this screen, see the “Oracle Configuration Manager” section in the *Oracle Configuration Manager Installer Guide*.

### Screen: Data Source Details

Oracle Retail Warehouse Management System - Forms Ap...

**ORACLE**

**Data Source Details**

Please enter the RWMS 13 schema name and password.

RWMS Schema Owner: RWMS01

RWMS Schema Password: .....

RWMS Oracle Database: pkols05


Buttons: Cancel, Back, Next, Install

<b>Field Title</b>	RWMS Schema Owner
<b>Field Description</b>	This is the same username that was used during the RWMS Database Schema Installer.
<b>Example</b>	RWMS01

<b>Field Title</b>	RWMS Schema Password
<b>Field Description</b>	This is the same password that was used during the RWMS Database Schema Installer.

<b>Field Title</b>	RWMS Oracle SID
<b>Field Description</b>	This is the same Oracle SID that was used during the RWMS Database Schema Installer.
<b>Example</b>	pkols05

Screen: Use Reporting Tool

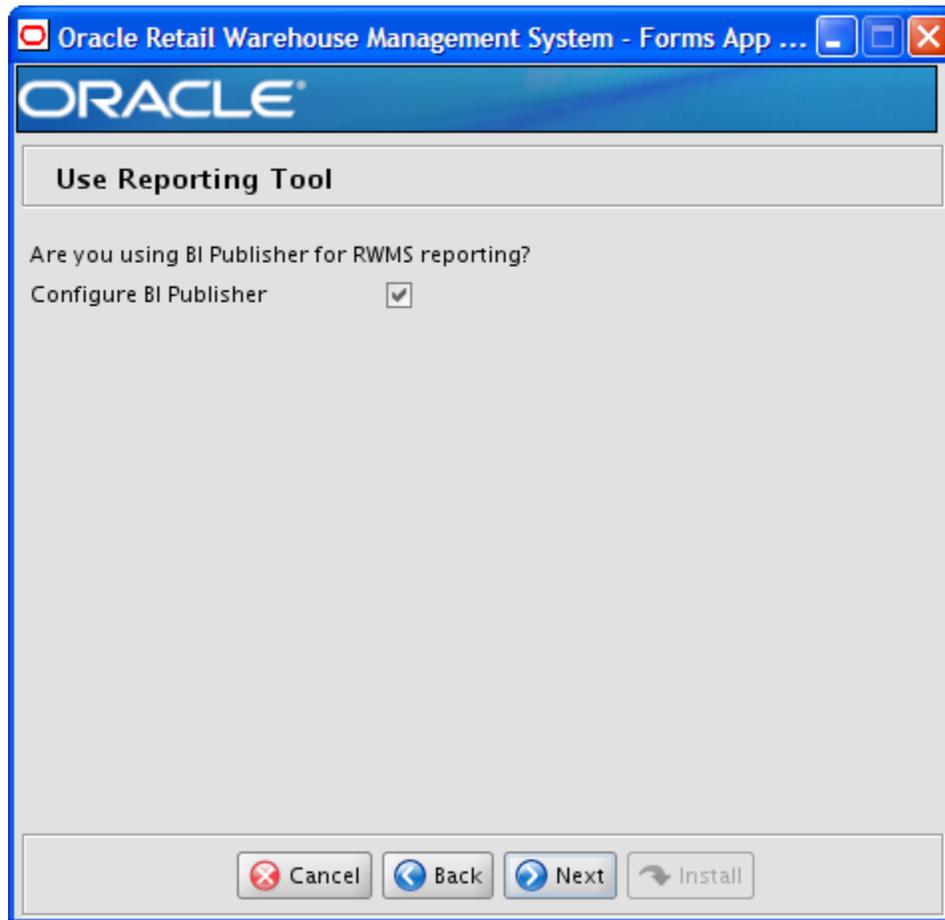

<b>Field Title</b>	Configure BI Publisher
<b>Field Description</b>	Check this box if you are using BI Publisher with RWMS.

**Screen: BI Publisher Source Details**

<b>Field Title</b>	Username
<b>Field Description</b>	This is the admin username for BI Publisher.
<b>Example</b>	Administrator

<b>Field Title</b>	Password
<b>Field Description</b>	This is the password for the BI Publisher admin

**Screen: Oracle Wallet**


<b>Field Title</b>	Oracle Wallet password
<b>Field Description</b>	This is the password for the wallet that will store the database credentials that were supplied in the Data Source Details screen.

**Screen: Installation Name**

The screenshot shows a Java-based application window titled "Oracle Retail Warehouse Management System - Forms App ...". The window has a blue header with the Oracle logo. Below the header, the title "Installation Name" is displayed. A paragraph of text explains that the user must enter a unique installation name for RWMS, which will be used in application URLs and reported to the Oracle Configuration Manager. A text input field labeled "Installation Name" contains the text "rwms13inst". At the bottom of the window, there are four buttons: "Cancel" (with a red X icon), "Back" (with a left arrow icon), "Next" (with a right arrow icon), and "Install" (with a circular arrow icon).


<b>Field Title</b>	Installation Name
<b>Field Description</b>	This value is used in conjunction the Oracle Configuration Manager (OCM). It gives the installation a unique name so the OCM can identify different installations of RWMS in the same WebLogic instance.
<b>Example</b>	rwms13inst

Screen: Application Installation Directory

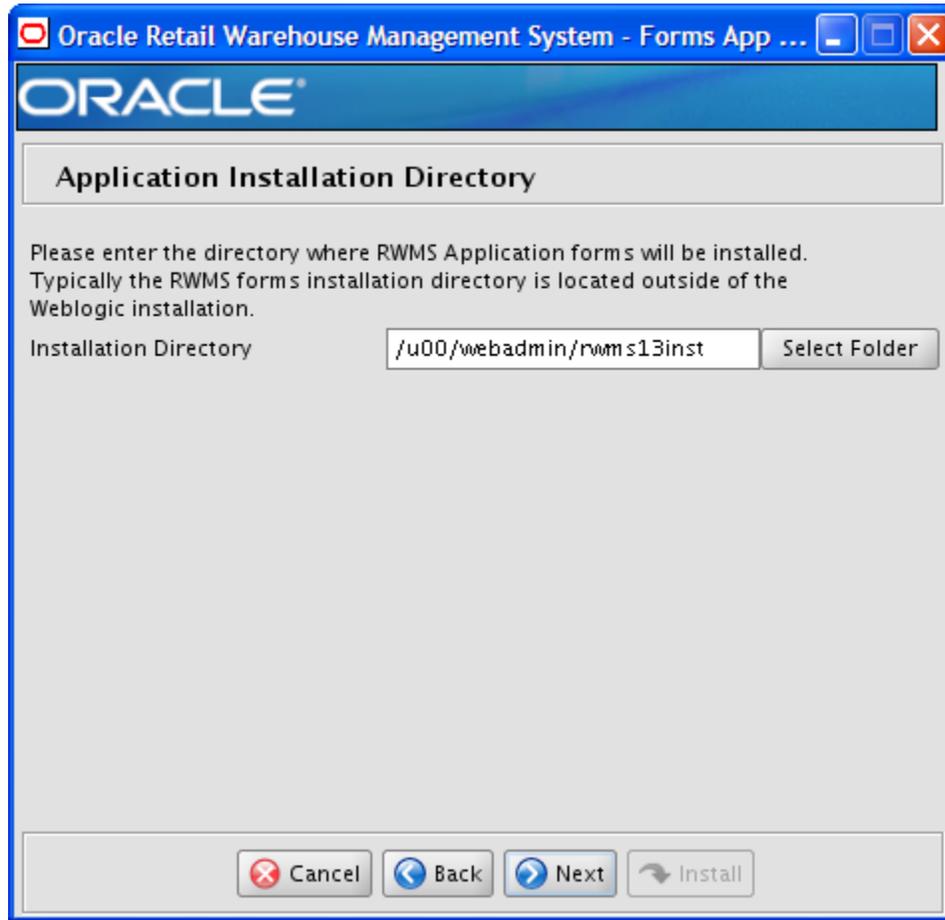

<b>Field Title</b>	Application Installation Directory
<b>Field Description</b>	The location where the RWMS Application (toolset, forms and reports) will be installed. The RWMS \$MMHOME path will be a subdirectory of this directory, named base.
<b>Example</b>	/u01/webadmin/rwms13inst

Screen: WebLogic Configuration

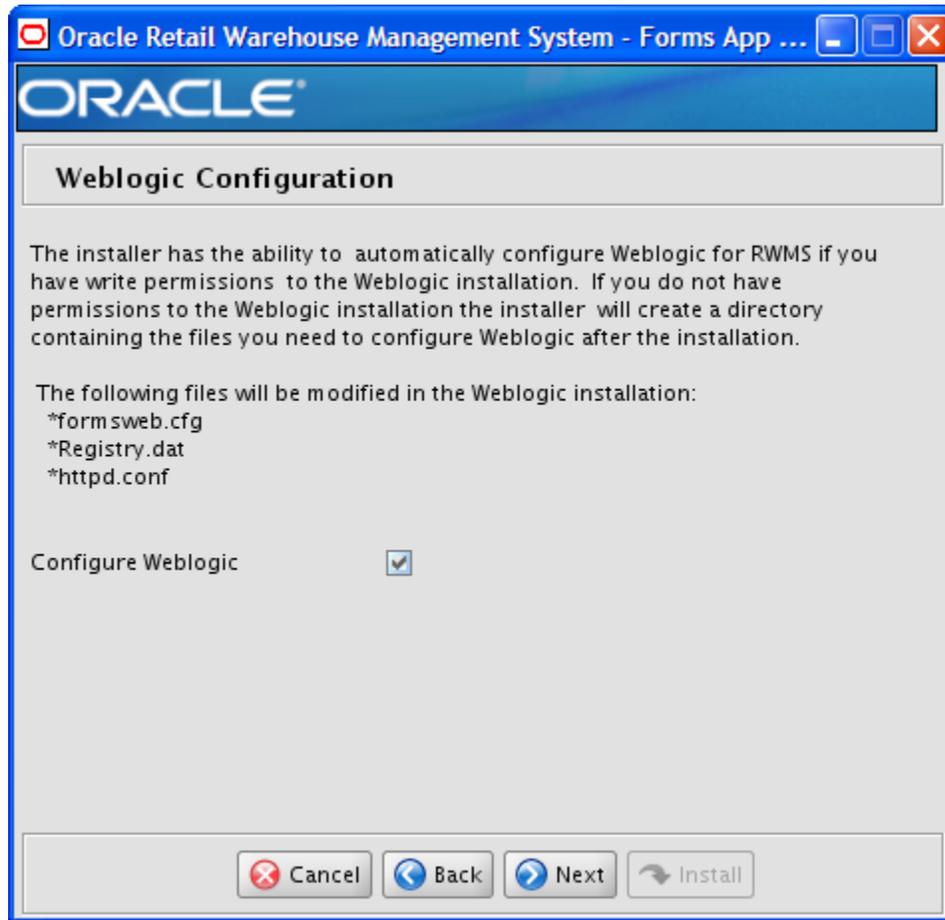

<b>Field Title</b>	Configure WebLogic
<b>Field Description</b>	Make the necessary configurations to the WebLogic server to be able to run RWMS forms. If you choose No, these configurations should be done manually. <b>Note:</b> If you rerun the installer, and choose to check the box in the installer screens, Configure WebLogic, you may need to clean up duplicate entries in the WebLogic formsweb.cfg file.

Screen: WebLogic Administrative Details

<b>Field Title</b>	Hostname
<b>Field Description</b>	Hostname of the application server
<b>Example</b>	redevlv0065

<b>Field Title</b>	WebLogic Admin port
<b>Field Description</b>	Port number of the WebLogic AdminServer
<b>Example</b>	7001

<b>Field Title</b>	WebLogic Admin User
<b>Field Description</b>	Username of the admin user for WebLogic instance to which the RWMS Webhelp application is being deployed.
<b>Example</b>	weblogic

<b>Field Title</b>	WebLogic Admin Password
<b>Field Description</b>	Password for the WebLogic admin user. You chose this password when you created the WebLogic instance.

---

---

## Appendix: Common Installation Errors

This section provides some common errors encountered during installation of RWMS.

### GUI Mode Crashes when Installing on AIX 7.1

#### Symptom

There is a known issue with the installer on AIX7.1. The installer in GUI mode will crash when it communicates with Oracle database, and produces two binary dump files (core.<timestamp>.dmp, Snap.<timestamp>.trc) and a javacore text file (javacore.<timestamp>.txt).

#### Solution

As a workaround, please run the installer in text mode (ksh install.sh text) or silent mode (ksh install.sh silent).

### Database Installer hangs on startup

#### Symptom

When the database schema installer is run, the following is written to the console and the installer hangs indefinitely:

```
Running pre-install checks
Running tnsping to get listener port
```

#### Solution

The installer startup script is waiting for control to return from the **tnsping** command, but **tnsping** is hanging. Type Control+C to cancel the installer, and investigate and solve the problem that is causing the **tnsping <sid>** command to hang. This can be caused by duplicate database listeners running.

### Warning: Could not create system preferences directory

#### Symptom

The following text appears in the installer Errors tab:

```
May 22, 2006 11:16:39 AM java.util.prefs.FileSystemPreferences$3 run
WARNING: Could not create system preferences directory. System preferences are
unusable.
May 22, 2006 11:17:09 AM java.util.prefs.FileSystemPreferences
checkLockFile0ErrorCode
WARNING: Could not lock System prefs. Unix error code -264946424.
```

#### Solution

This is related to Java bug 4838770. The /etc/.java/.systemPrefs directory may not have been created on your system. See <http://bugs.sun.com> for details.

This is an issue with your installation of Java and does not affect the Oracle Retail product installation.

## Warning: Could not find X Input Context

### Symptom

The following text appears in the console window during execution of the installer in GUI mode:

```
Couldn't find X Input Context
```

### Solution

This message is harmless and can be ignored.

## Unresponsive drop-downs

### Symptom

In GUI mode, when you click on the drop-down list, the list does not appear, and the following message appears in the console window:


```
XTEST extension not installed on this X server: Error 0
```

### Solution

To run the installer in GUI mode, you must have the XTEST extension enabled in your X server.

Enabling XTEST in Exceed:

3. Open Xconfig to edit Exceed configuration.
4. Go to the X Server Protocol settings.
5. Click the Extensions tab.
6. Make sure that the XTEST extension is selected:

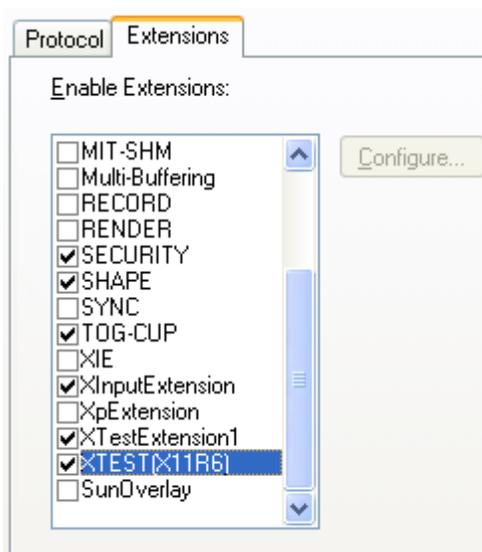

7. Restart the X Server and run the installer again.

## Could not execl robot child process: Permission denied

### Symptom

When opening a drop-down list in GUI mode of the RWMS installer, the installer freezes up and displays the following message in the console:

```
Couldn't execl robot child process: Permission denied
```

### Solution

As the owner of the database ORACLE\_HOME (i.e. *oracle*), grant execute permissions to the `awt_robot*` files under `$ORACLE_HOME/jdk/jre/lib`. The database schema installer uses `$ORACLE_HOME/jdk` for its `JAVA_HOME`.

Example (using SUN Solaris):

```
chmod a+x $ORACLE_HOME/jdk/jre/lib/sparc/awt_robot
chmod a+x $ORACLE_HOME/jdk/jre/lib/sparcv9/awt_robot
```

## ConcurrentModificationException in Installer GUI

### Symptom

In GUI mode, the errors tab shows the following error:

```
java.util.ConcurrentModificationException
    at
java.util.AbstractList$Itr.checkForComodification(AbstractList.java:448)
    at java.util.AbstractList$Itr.next(AbstractList.java:419)
... etc
```

### Solution

You can ignore this error. It is related to third-party Java Swing code for rendering of the installer GUI and does not affect the retail product installation.

## FRM-30064: Unable to parse statement select while compiling fm\_ituda.fmb

### Symptom

When running the application installer you get the following error:

```
FRM-30064: Unable to parse statement select vu.uda_desc, vu.uda_id from v_uda vu
where get_primary_lang = get_user_lang and vu.display_type = 'LV' union all
select nvl(t.translated_value, vu.uda_desc), vu.uda_id from tl_shadow t, v_uda
vu where get_primary_lang != get_user_lang and upper(vu.uda_desc) = t.key(+) and
get_user_lang = t.lang(+) and vu.display_type = 'LV' order by 1.
ORA-28112: failed to execute policy function
Record Group RG_UDA_LOV
Form: FM_ITUDALST
```

```
FRM-30085: Unable to adjust form for output.
```

```
Form not created
```

### Solution

Disable the database filter policies by running `drop_filter_policy.sql`, run the application installer again and then run `add_filter_policy.sql`. Both files can be located with the database installer.

## ORA-04031 (unable to allocate memory) error during database schema installation

### Symptom

When running the database schema installer you get the following error one or more times:

```
[ora:sqlplus] alter package
[ora:sqlplus] *
[ora:sqlplus] ERROR at line 1:
[ora:sqlplus] ORA-04031: unable to allocate 92120 bytes of shared memory ("shared
[ora:sqlplus] pool","unknown object","PL/SQL MPCODE","BAMIMA: Bam Buffer")
```

### Solution

There was not enough available memory in the shared pool on the database at the time of compilation. There are several choices to get past this error:

- Log into the database and attempt to recompile invalid objects in the database schema. Subsequent attempts to compile the same object(s) can be successful.
- Have a DBA increase the shared pool size on the database and re-run the installer from scratch on a new schema user.

## X Error of failed request: BadWindow (invalid Window parameter)

### Symptom

When compiling forms during the application installation you receive this error one or more times:

```
X Error of failed request: BadWindow (invalid Window parameter)
Major opcode of failed request: 18 (X_ChangeProperty)
Resource id in failed request: 0x1800002
Serial number of failed request: 432
Current serial number in output stream: 437
```

### Solution

This error occurs when there are too many requests made to the X server. If this error occurs manually recompile the form.

Example:

```
frrmpcmp.sh userid=$UP module_type=form module=FORM_OR_MENU
```

## RIB Errors

At random times, the RIB will get certain errors such as GETNEXT(?,?,?,?,?) and/or ORA-21700 object does not exist or is marked for delete. This is very confusing because you may research and find that the object exists and is valid.

You must re-initialize the reference to reference an existing object. You do this by:

1. Bringing down the RIB servers in question
2. Running /RIB\_INSTALL\_DIR>/InstallAndCompileAllRibOracleObjects.sql
3. Running another object validate script (ex: inv\_obj\_comp.sql) to make sure objects are valid (some may have deadlocked in the end of the previous step).
4. Bringing up the RIB server in question

## Error connecting to database URL

### Symptom

After entering database credentials in the installer screens and hitting next, a message pops up with an error like this:

```
Error connecting to database URL <url> as user <user>
details...
```

The message prevents you from moving on to the next screen to continue the installation.

### Solution

This error occurs when the installer fails to validate the user credentials you have entered on the screen. Make sure that you have entered the credentials properly. If you receive a message similar to this:

```
Error connecting to database URL <url> as user <user>
```

```
java.lang.Exception: UnsatisfiedLinkError encountered when using the Oracle
driver.
```

Please check that the library path is set up properly or switch to the JDBC thin client.

It may mean that the installer is using the incorrect library path variables for the platform you are installing on. Open the file

```
<STAGING_DIR>/rwms/dbschema/common/preinstall.sh and toggle the variable
"use32bit" to "true" if it is set to "false" or vice versa. This setting is dependent on the
JRE that is being used.
```

## Forms Installer fails on HP-UX

### Symptom

Errors occur during Forms installer screens when run on HP-UX. When you click **Next** on the installer screen, Data Source Details, you get this error message on the screen: "no ocijdbc11 in java.library.path." The message prevents you from moving to the next screen.

### Solution

This error message can be ignored. Verify that the data source details you entered are correct, and uncheck the box labeled **Test Data Source?** The installer screens will not attempt to validate the data source when you click **Next**. But the installer will attempt to validate once again when installation starts, and the installer will fail if the credentials are incorrect.

## RWMS Forms recompile could fail although a successful message appears

### Symptom

RWMS forms could fail during installation, but a successful message is displayed when the installation is finished. There may be some errors in the log file.

### Solution

Verify the logs after RWMS forms compilation has been completed for failure messages.

## RWMS Forms apply\_item\_class\_s.fmb or fwd\_pick\_loc\_editor\_s.fmb fail to compile

### Symptom

RWMS forms apply\_item\_class\_s.fmb or fwd\_pick\_loc\_editor\_s.fmb fail during installation, with the message "Compilation errors have occurred. Form not created."

### Solution

Recompile the plsql packages ADD\_BY\_POLIST and FPR\_PO\_ASSIGN\_S in the RWMS schema and recompile the forms.

Example: ALTER PACKAGE FPR\_PO\_ASSIGN\_S COMPILE PACKAGE;

## GUI screens fail to open when running Installer

### Symptom

When running the installer in GUI mode, the screens fail to open and the installer ends, returning to the console without an error message. The ant.install.log file contains this error:

```
Fatal exception: Width (0) and height (0) cannot be <= 0  
java.lang.IllegalArgumentException: Width (0) and height (0) cannot be <= 0
```

### Solution

This error is encountered when Antinstaller is used in GUI mode with certain X Servers. To workaroud this issue, copy ant.install.properties.sample to ant.install.properties and rerun the installer.

## Installer fails with sun.security.validator.KeyStores exception

### Symptom

Installer first throws the error

```
Exception in thread "main" java.lang.NoClassDefFoundError:  
sun.security.validator.KeyStores
```

And then on continuing aborts with the same error.

### Solution

OCM does not work on AIX 7.1. The workaround after facing this exception, is to recreate the STAGING\_DIR and then delete the "retail-OCM-wls.zip" file present in STAGING\_DIR/rwms directory, before running the installer.

---

---

## Appendix: URL Reference

This appendix is a reference for URL information.

### JDBC URL for a Database

Used by the Java application and by the installer to connect to the database.

Thick Client Syntax: jdbc:oracle:oci:@<sid>

<sid>: system identifier for the database

For example, jdbc:oracle:oci:@mysid

Thin Client Syntax: jdbc:oracle:thin:@<host>:<port>:<sid>

<host>: hostname of the database server

<port>: database listener port

<sid>: system identifier for the database

For example, jdbc:oracle:thin:@myhost:1521:mysid1:mysid

### LDAP Server URL

Used by the Java application to connect to the LDAP directory.

Syntax: ldap://<host>:<port>

<host>: hostname of the directory server

<port>: LDAP server port

For example, ldap://myhost:389t:389

### JNDI Provider URL for an Application

Used by the application client to access the application running in the server. Also used by other applications for server-to-server calls.

WebLogic:

Syntax: t3://<host>:<port>/<managed\_server\_name>/<app>

Where,

- <host>: hostname of the WebLogic environment.
- <port>: Managed server port number. This can be found in the <managed server> tag at <WebLogic\_home>/user\_projects/domain/<domain\_name>/config/config.xml
- <managed\_server\_name>: This is the managed server name on which the RIB application is deployed.
- <app>: Deployment name for the application.

For example, t3://mspdv161.us.oracle.com:17003/rib-rpm-server/rib-rpm

---

**Note:** The JNDI provider URL can have a different format depending on your cluster topology. Consult WebLogic Server documentation for details.

---



---

---

## Appendix: Oracle Single Sign-On Resource Access Descriptors

Oracle Forms applications such as RWMS use database connections for authentication and authorization purposes. Oracle Single Sign-On, however, uses the Oracle Internet Directory (OID) user ID and password for this purpose. The Forms framework maps OID user IDs to database connections via information stored in Resource Access Descriptors (RADs). A user will have one RAD for each application accessed. RADs may be created by an administrator or by an LDIF script. Depending on the Oracle Internet Directory and/or the formsweb.cfg configuration, RADs may also be created by the user.

A user is prompted for the database connection information whenever formsweb.cfg file specifies ssoMode = true and createDynamicResources = true for an application and no valid RAD exists. RADs may become invalid when passwords have expired or have been changed.

RADs may be created by administrators or users via the Delegated Administration Services application.

---

---

**Note:** Users can create new RADs only if one or more RADs already exist.

---

---

RADs may be created and through LDIF scripts as well. For information, see the My Oracle Support document, "How to Create and Copy SSO User Resources (RADs) (ID 244526.1).



---

---

## Appendix: Oracle Single Sign-On for WebLogic

Single Sign-On (SSO) is a term for the ability to sign onto multiple Web applications via a single user ID/Password. There are many implementations of SSO. Oracle currently provides two different implementations: Oracle Single Sign-On (OSSO), and Oracle Access Manager (provides more comprehensive user access capabilities).

Most, if not all, SSO technologies use a session cookie to hold encrypted data passed to each application. The SSO infrastructure has the responsibility to validate these cookies and, possibly, update this information. The user is directed to log on only if the cookie is not present or has become invalid. These session cookies are restricted to a single browser session and are never written to a file.

Another facet of SSO is how these technologies redirect a user's Web browser to various servlets. The SSO implementation determines when and where these redirects occur and what the final screen shown to the user is.

Most SSO implementations are performed in an application's infrastructure and not in the application logic itself. Applications that leverage infrastructure managed authentication (such as deployment specifying Basic or Form authentication) typically have little or no code changes when adapted to work in an SSO environment.

### What Do I Need for Oracle Single Sign-On?

The nexus of an Oracle Single Sign-On system is the Oracle Identity and Access Management installation. This consists of the following components:

- An Oracle Internet Directory (OID) LDAP server, used to store user, role, security, and other information. OID uses an Oracle database as the back-end storage of this information.
- An Oracle Access Manager (OAM) 11g Release 1 server and administrative console for implementing and configuring policies for single sign-on.
- A Policy Enforcement Agent such as Oracle Access Manager 11g Agent (WebGate) or Oracle Single Sign-On Plug-in, used to authenticate the user and create the Single Sign-On cookies. Some Retail products require a WebGate agent and others require an OSSO plug-in. Both can interoperate in a single OAM environment.
- The Delegated Administration Services (DAS) application in Oracle Forms Services 11g Release 2 and Oracle Directory Services Manager (ODSM) application in OIM11g, used to administer users and group information. This information may also be loaded or modified via standard LDAP Data Interchange Format (LDIF) scripts.
- Additional administrative scripts for configuring the OAM system and registering HTTP servers.

Additional WebLogic managed servers will be needed to deploy the business applications leveraging the Single Sign-On technology.

### Can Oracle Access Manager Work with Other SSO Implementations?

Yes, Oracle Access Manager has the ability to interoperate with many other SSO implementations, but some restrictions exist.

## Oracle Single Sign-on Terms and Definitions

The following terms apply to single sign-on.

### Authentication

Authentication is the process of establishing a user's identity. There are many types of authentication. The most common authentication process involves a user ID and password.

### Dynamically Protected URLs

A Dynamically Protected URL is a URL whose implementing application is aware of the Oracle Access Manager environment. The application may allow a user limited access when the user has not been authenticated. Applications that implement dynamic protection typically display a Login link to provide user authentication and gain greater access to the application's resources.

### Oracle Identity Management (OIM) and Oracle Access Manager (OAM) for 11g

Oracle Identity Management (OIM) 11g includes Oracle Internet Directory and ODSM. Oracle Access Manager (OAM) 11g should be used for SSO using WebGate or OSSO agents depending on the application. Oracle Forms 11g contains Oracle HTTP server and other Retail Applications will use WebTier11g for HTTP.

### MOD\_OSSO

mod\_osso is an Apache Web Server module an Oracle HTTP Server uses to function as a partner application within an Oracle Access Manager environment. The Oracle HTTP Server is based on the Apache HTTP Server.

### MOD\_WEBLOGIC

mod\_WebLogic operates as a module within the HTTP server that allows requests to be proxied from the Apache HTTP server to the WebLogic server.

### Oracle Access Manager 11g Agent (WebGate)

Oracle WebGates are policy enforcement agents which reside with relying parties and delegate authentication and authorization tasks to OAM servers.

### Oracle Internet Directory

Oracle Internet Directory (OID) is an LDAP-compliant directory service. It contains user ids, passwords, group membership, privileges, and other attributes for users who are authenticated using Oracle Access Manager.

## Partner Application

A partner application is an application that delegates authentication to the Oracle Identity Management Infrastructure. One such partner application is the Oracle HTTP Server (OHS) supplied with Oracle Forms Server or WebTier11g Server if using other Retail Applications other than Oracle Forms Applications. OHS or WebTier uses the MOD\_OSSO module to configure this functionality.

All partner applications must be registered with Oracle Access Manager (OAM) 11g. An output product of this registration is a configuration file the partner application uses to verify a user has been previously authenticated.

## Realm

A Realm is a collection users and groups (roles) managed by a single password policy. This policy controls what may be used for authentication (for example, passwords, X.509 certificates, and biometric devices). A Realm also contains an authorization policy used for controlling access to applications or resources used by one or more applications.

A single OID can contain multiple Realms. This feature can consolidate security for retailers with multiple banners or to consolidate security for multiple development and test environments.

## Statically Protected URLs

A URL is considered to be Statically Protected when an Oracle HTTP server is configured to limit access to this URL to only SSO authenticated users. Any attempt to access a Statically Protected URL results in the display of a login page or an error page to the user.

Servlets, static HTML pages, and JSP pages may be statically protected.

---

---

**Note:** Dynamically Protected URL and Statically Protected URL are within the context of the Oracle Software Security Assurance (OSSA). The static protection for URLs is a common JEE feature.

---

---

## What Single Sign-On is not

Single Sign-On is NOT a user ID/password mapping technology.

However, some applications can store and retrieve user IDs and passwords for non-SSO applications within an OID LDAP server. An example of this is the Oracle Forms Web Application framework, which maps Single Sign-On user IDs to a database logins on a per-application basis.

## How Oracle Single Sign-On Works


Oracle Access Manager involves several different components. These are:

- The Oracle Access Manager (OAM) server, which is responsible for the back-end authentication of the user.
- The Oracle Internet Directory LDAP server, which stores user IDs, passwords, and group (role) membership.
- The Oracle Access Manager Agent associated with the Web application, which verifies and controls browser redirection to the Oracle Access Manager server.
- If the Web application implements dynamic protection, then the Web application itself is involved with the OAM system.

### About SSO Log In Processing with OAM Agents

1. The user requests a resource.
2. Webgate forwards the request to OAM for policy evaluation
3. OAM:
  - a. Checks for the existence of an SSO cookie.
  - b. Checks policies to determine if the resource is protected and if so, how?
4. OAM Server logs and returns the decision
5. Webgate responds as follows:
  - **Unprotected Resource:** Resource is served to the user
  - **Protected Resource:**  
Resource is redirected to the credential collector.  
The login form is served based on the authentication policy.  
Authentication processing begins
6. User sends credentials
7. OAM verifies credentials
8. OAM starts the session and creates the following host-based cookies:
  - **One per partner:** OAMAuthnCookie set by 11g WebGates using authentication token received from the OAM Server after successful authentication.  
**Note:** A valid cookie is required for a session.
  - **One for OAM Server:** OAM\_ID
9. OAM logs Success or Failure.
10. Credential collector redirects to WebGate and authorization processing begins.
11. WebGate prompts OAM to look up policies, compare them to the user's identity, and determine the user's level of authorization.
12. OAM logs policy decision and checks the session cookie.
13. OAM Server evaluates authorization policies and cache the result.
14. OAM Server logs and returns decisions
15. WebGate responds as follows:
  - If the authorization policy allows access, the desired content or applications are served to the user.
  - If the authorization policy denies access, the user is redirected to another URL determined by the administrator.

## SSO Login Processing with OAM Agents

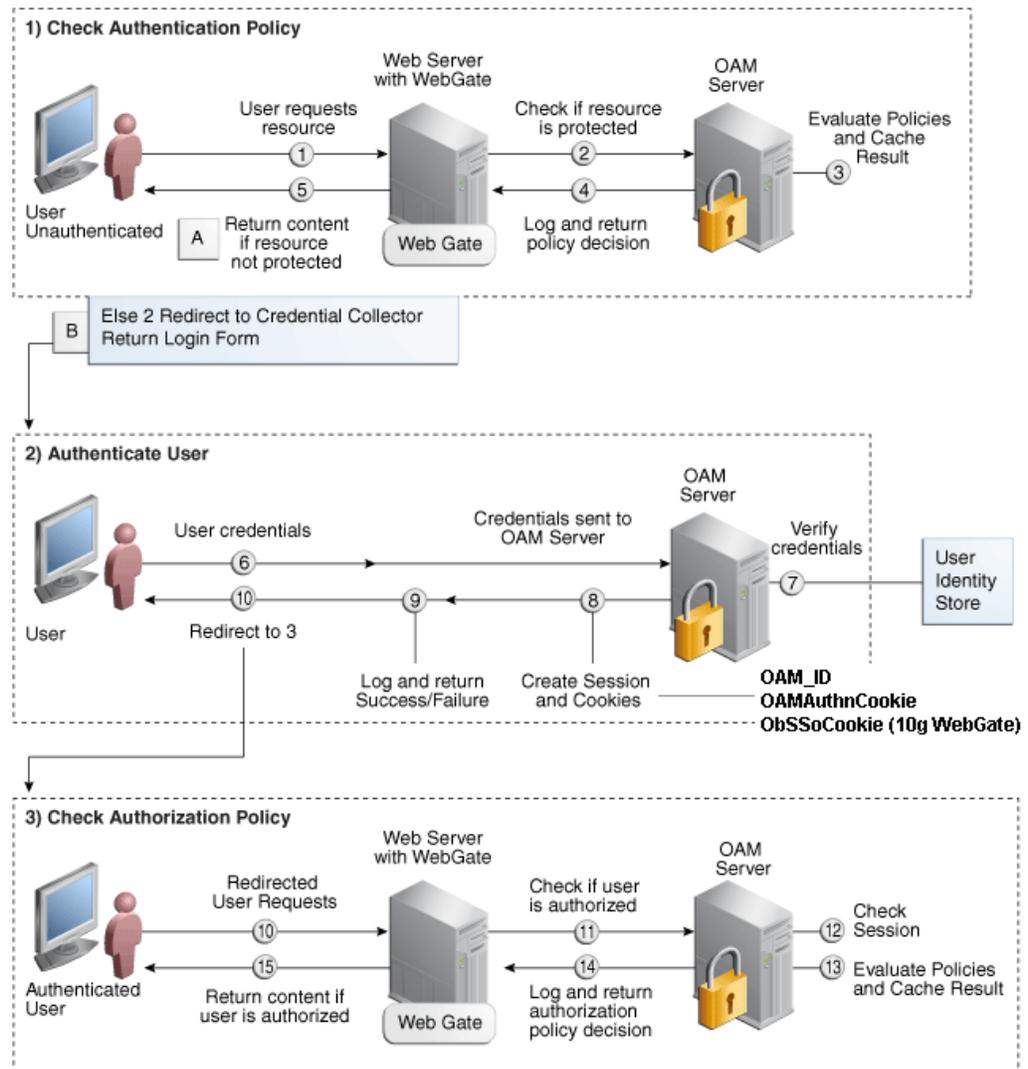

## Installation Overview

Installing Oracle Single Sign-On using OAM11g requires installation of the following:

1. Oracle Internet Directory (OID) ldap server and the Oracle Directory Services Manager. They are typically installed using the Installer of Oracle Identity Management 11gR1 (11.1.1.6). The ODSM application can be used for user and realm management within OID.
2. Oracle Access Manager 11gR1 (11.1.1.5) has to be installed and configured.
3. Additional midtier instances (such as Oracle Forms 11g) for Oracle Retail applications based on Oracle Forms technologies (such as RMS). These instances must be registered with the OAM installed in step 2.
4. Additional application servers to deploy other Oracle Retail applications and performing application specific initialization and deployment activities must be registered with OAM installed in step 2. For additional information on SSO 11g

installation, see the Oracle Access Manager and Single Sign-On Whitepaper (My Oracle Support Doc ID 1492047.1).

### **Infrastructure Installation and Configuration**

The Infrastructure installation for Oracle Access Manager (OAM) is dependent on the environment and requirements for its use. Deploying Oracle Access Manager (OAM) to be used in a test environment does not have the same availability requirements as for a production environment. Similarly, the Oracle Internet Directory (OID) LDAP server can be deployed in a variety of different configurations. See the *Oracle Identity Management Installation Guide11g*.

### **OID User Data**

Oracle Internet Directory is an [LDAP v3](#) compliant directory server. It provides standards-based user definitions out of the box.

Customers with existing corporate LDAP implementations may need to synchronize user information between their existing LDAP directory servers and OID. OID supports standard LDIF file formats and provides a JNDI compliant set of Java classes as well. Moreover, OID provides additional synchronization and replication facilities to integrate with other corporate LDAP implementations.

Each user ID stored in OID has a specific record containing user specific information. For role-based access, groups of users can be defined and managed within OID. Applications can thus grant access based on group (role) membership saving administration time and providing a more secure implementation.

### **OID with Multiple Realms**

OID can be configured to support multiple user Realms. Each realm is independent from each other and contains its own set of user IDs. As such, creating a new realm is an alternative to installing multiple OID and Infrastructure instances. Hence, a single Infrastructure OAS can be used to support development and test environments by defining one realm for each environment.

Realms may also be used to support multiple groups of external users, such as those from partner companies. For more information on Realms, see the *Oracle Internet Directory Administrators Guide*.

## **User Management**

User Management consists of displaying, creating, updating or removing user information. There are two basic methods of performing user management: LDIF scripts or Oracle Directory Services Manager (ODSM) available for OID11g.

### **ODSM**

Oracle Directory Services Manager (ODSM) is a Web-based application used in OID11g is designed for both administrators and users which enables you to configure the structure of the directory, define objects in the directory, add and configure users, groups, and other entries. ODSM is the interface you use to manage entries, schema, security, adapters, extensions, and other directory features.

### **LDIF Scripts**

Script based user management can be used to synchronize data between multiple LDAP servers. The standard format for these scripts is the LDAP Data Interchange Format (LDIF). OID supports LDIF script for importing and exporting user information. LDIF scripts may also be used for bulk user load operations.

**User Data Synchronization**

The user store for Oracle Access Manager resides within the Oracle Internet Directory (OID) LDAP server. Oracle Retail applications may require additional information attached to a user name for application-specific purposes and may be stored in an application-specific database. Currently, there are no Oracle Retail tools for synchronizing changes in OID stored information with application-specific user stores. Implementers should plan appropriate time and resources for this process. Oracle Retail strongly suggests that you configure any Oracle Retail application using an LDAP for its user store to point to the same OID server used with Oracle Access Manager.



---

---

## Appendix: Setting Up an Oracle Wallet

The ORACLE Wallet is designed to securely store connection information for an Oracle database, to allow processes to easily and safely connect. This avoids situations where programs would accept a username/password on the command-line (exposing that information to “ps” commands), or storing connection information in plain text configuration files.

This is an OPTIONAL feature. But it is highly advised unless you have a machine where you can ensure the administrator is the only one to sign-on to the server.

After completion of the setup you will be able to enter a connect string, such as sqlplus /@<db alias from tnsname.ora>.

For example:

```
sqlplus /@dvols29_wms01user
```

### Set up a Wallet

To set up a wallet, complete the following steps.

1. Create a new directory called wallet under the folder structure where you run RWMS batch.
  - cd /projects/rwms13.2/dev/forms
  - mkdir wallet
  - chmod 755 wallet

---

---

**Note:** By default the permissions on the wallet will allow only the owner to use it, ensuring the connection information is secure. If you are creating a wallet for multiple users you must ensure the permissions are configured to allow only appropriate users to access the wallet.

---

---

2. Create a sqlnet.ora in the wallet directory with these contents. It is critical that WALLET\_LOCATION is on line 1 in the file

```
WALLET_LOCATION = (SOURCE = (METHOD = FILE) (METHOD_DATA =
(DIRECTORY = /projects/rwms13.2/dev/wallet)) )
SQLNET.WALLET_OVERRIDE=TRUE
SSL_CLIENT_AUTHENTICATION=FALSE
```
3. Set up a tnsnames.ora in the wallet directory. This tnsnames.ora will include the standard tnsnames.ora file, and then add two custom entries that are only for use with the wallet (ex: sqlplus /@dvols29\_wms01user).

```

ifile = /u00/oracle/product/11.2.0.3/network/admin/tnsnames.ora

dvols29_wms01user =
  (DESCRIPTION = (ADDRESS_LIST = (ADDRESS = (PROTOCOL = tcp)
    (host = mspdv311.us.oracle.com) (Port = 1521)))
    (CONNECT_DATA = (SID = dvols29) (GLOBAL_NAME = dvols29)))

dvols29_wms01user.world =
  (DESCRIPTION = (ADDRESS_LIST = (ADDRESS = (PROTOCOL = tcp)
    (host = mspdv311.us.oracle.com) (Port = 1521)))
    (CONNECT_DATA = (SID = dvols29) (GLOBAL_NAME = dvols29)))

```

---

**Note:** It is important to not just copy the tnsnames.ora file, as it quickly becomes out of date.

---

4. Create the wallet files (initially empty).
  - a. Ensure you are in the intended location
 

```
$ pwd
/projects/rwms13.2/dev/forms/wallet
```
  - b. Create the wallet files
 

```
$ mkstore -wrl . -create
```
  - c. Enter password:-> enter your chosen administrative password for the wallet
  - d. Enter password again:
 

Two wallet files are created from the above command:

    - ewallet.p12
    - cwallet.sso
5. Create the wallet entry that will tie a username/password to the custom tns alias that was setup in the wallet's tnsnames.ora file.

```
mkstore -wrl . -createCredential <tns_alias> <username> <password>
```

---

**Example:**

```
mkstore -wrl . -createCredential dvols29_wms01user
wms01user oracle
```

---

6. Test connectivity. The ORACLE\_HOME used with the wallet must be the same version or higher than what the wallet was created with.

```
$ export TNS_ADMIN=/projects/rwms13.2/dev/forms
```

```
$ sqlplus /@dvols29_wms01user
```

```
SQL*Plus: Release 11.2.0.3.0 - Production on Fri Jan 14 12:53:39 2011
```

```
Copyright (c) 1982, 2009, Oracle. All Rights Reserved.
```

```
Connected to:
```

```
Oracle Database 11g Enterprise Edition Release 11.2.0.3.0 - 64bit Production
With the Partitioning, Real Application Clusters, Automatic Storage Management
and Real Application Testing options
```

```
SQL> show user
```

```
USER is "wms01user"
```

## Additional Wallet Commands

The following are more wallet commands.

- Delete a credential on wallet:  
`mkstore -wrl . -deleteCredential dvols29_wms01user`
- Change the password for a credential on wallet  
`mkstore -wrl . -modifyCredential dvols29_wms01user wms01user oracle`
- See what wallet credential entries you have:  
`mkstore -wrl . -list`  
Returns values like:  
`oracle.security.client.connect_string1`  
`oracle.security.client.user1`  
`oracle.security.client.password1`
- View the details of a wallet entry:  
`mkstore -wrl . -viewEntry oracle.security.client.connect_string1`  
Returns value of the entry:  
`dvols29_wms01user`  
  
`mkstore -wrl . -viewEntry oracle.security.client.user1`  
Returns value of the entry:  
`wms01user`  
  
`mkstore -wrl . -viewEntry oracle.security.client.password1`  
Returns value of the entry:  
`oracle`

Once wallet info is set up, create a `wallet_batch_profile` same path location where wallet dir exists. `wallet_batch_profile` should look something like:

```
#source this profile out in order to run batch (run_distribution.sh, etc)
#using wallet entry for schema/password@db rather than the actual password
#so that the command line will not show actual password.
export TNS_ADMIN=/projects/rwms13.2/dev/forms
export ORACLE_WALLET_ENTRY=dvols29_wms01user
export RDMUSER=''
export RDMPWD='@'$ORACLE_WALLET_ENTRY
```

You will now be able to run a batch command from bin with exporting UP to show [schema/password@db](#). Using wallet, we are able to keep the password invisible.

## Set up Application (Java) Wallet for RWMS .env File

To set up the application (Java) wallet for the RWMS .env file, complete the following steps.

1. Create a new directory called `wallet` under the folder structure through which you run RWMS (for example, `cd /projects/rwms13.2/extras`).
  - `mkdir javawallet`
2. Ensure that `retail-public-security-api.jar` is unjarred and that the JAR is specified in the path.
3. Ensure that `wmsSecurity.jar` is unjarred and the JAR is specified in the CLASSPATH prior to wallet entries as shown in the example below.
4. Locate the `save_credential.sh` script. [Usually present in `retail-public-security-api/bin` directory].

- The application wallet requires two entries for BI Publisher reports to work. The first one is user name/password@ConnectionString for RWMS Database. The second one is username/password for BI Publisher. See examples in the next step.

- Create a wallet using this command:

```
./save_credential.sh -u <USERNAME> -a <ALIASNAME> -p <PARTITION NAME>
-l <WALLET PATH>
```

Example: ./save\_credential.sh -u wms01user -a RWMS132\_USER -p rwms132 -l /projects/rwms13.2/extras/javawallet

It will ask for password [Twice] and the wallet will be created.

For example, password is retek@sid.

```
./save_credential.sh -u Administrator-a BI_ALIAS -p rwms132 -l
/projects/rwms13.2/extras/javawallet
```

Password could be Administrator.

- Re-run the above command to put multiple entries into the same wallet.

The above commands shall generate three files as below.

- cwallet.sso
- jazn-data.xml
- jps-config.xml

- The entries in .env file will look like the following example.

```
rwms13inst.env
```

```
-----
```

```
CLASSPATH=u00/webadmin/product/wls_retail/as_1/forms/j2ee/frmsrv.jar:/u00/webadmin/product/wls_retail/as_1/jlib/ldapjclnt11.jar:/u00/webadmin/product/wls_retail/as_1/jlib/debugger.jar:/u00/webadmin/product/wls_retail/as_1/jlib/ewt3.jar:/u00/webadmin/product/wls_retail/as_1/jlib/share.jar:/u00/webadmin/product/wls_retail/as_1/jlib/utj.jar:/u00/webadmin/product/wls_retail/as_1/jlib/zrclient.jar:/u00/webadmin/product/wls_retail/as_1/reports/jlib/rwrn.jar:/u00/webadmin/product/wls_retail/as_1/forms/java/frmwebutil.jar:/u00/webadmin/product/wls_retail/as_1/jlib/startdejvm.jar:/u00/webadmin/product/wls_retail/as_1/opmn/lib/optic.jar:/u00/webadmin/product/wls_retail/oracle_common/modules/oracle.jrf_11.1.1/jrf.jar:/u00/webadmin/product/wls_retail/wlserver_10.3/server/lib/weblogic.jar:/u00/webadmin/product/wls_retail/modules/com.oracle.toplink_1.0.0.0_11-1-1-5-0.jar:/u00/webadmin/product/wls_retail/modules/org.eclipse.persistence_1.1.0.0_2-1.jar:/u00/webadmin/product/wls_retail/modules/javax.persistence_1.0.0.0_2-0-0.jar:/u00/webadmin/product/wls_retail/oracle_common/modules/oracle.xdk_11.1.0/xmlparserv2.jar:/u00/webadmin/product/wls_retail/oracle_common/modules/oracle.xdk_11.1.0/xml.jar:/u00/webadmin/product/wls_retail/oracle_common/modules/oracle.nlsrtl_11.1.0/orai18n-mapping.jar:/u00/webadmin/product/wls_retail/modules/com.bea.core.antlr.runtime_2.7.7.jar:/vol.rtk/pkg_mocks/rwms132/install/base/retail-public-security-api/lib/retail-public-security-api.jar:/vol.rtk/pkg_mocks/rwms132/install/base/extras/bihelper.jar:/vol.rtk/pkg_mocks/rwms132/install/base/extras/wmsSecurity.jar
```

```
...
```

```
TNS_ADMIN=/projects/rwms13.2/dev/forms/wallet
RWMS_WALLET_PATH=/projects/rwms13.2/extras/javawallet
RWMS_WALLET_PARTITION=rwms132
RWMS_WALLET_LOGON=TRUE
RWMS_BI_PWD=BI_ALIAS
RWMS_DB_CONNECT= RWMS132_USER
```

```
...
```

---

---

## Appendix: Setting Up Password Stores with Oracle Wallet

As part of an application installation, administrators must set up password stores for database user accounts using Oracle Wallet. These password stores must be installed on the application database side. While the installer handles much of this process, the administrators must perform some additional steps.

A password store for the application and application server user accounts must also be installed; however, the installer takes care of this entire process.

### About Password Stores and Oracle Wallet

Oracle databases have allowed other users on the server to see passwords in case database connect strings (username/password@db) were passed to programs. In the past, users could navigate to `ps -ef | grep <username>` to see the password if the password was supplied in the command line when calling a program.

To make passwords more secure, Oracle Retail has implemented the Oracle Software Security Assurance (OSSA) program. Sensitive information such as user credentials now must be encrypted and stored in a secure location. This location is called password stores or wallets. These password stores are secure software containers that store the encrypted user credentials.

Users can retrieve the credentials using aliases that were set up when encrypting and storing the user credentials in the password store. For example, if `username/password@db` is entered in the command line argument and the alias is called `db_username`, the argument to a program is as follows:

```
sqlplus /@db_username
```

This would connect to the database as it did previously, but it would hide the password from any system user.

After this is configured, as in the example above, the application installation and the other relevant scripts are no longer needed to use embedded usernames and passwords. This reduces any security risks that may exist because usernames and passwords are no longer exposed.

When the installation starts, all the necessary user credentials are retrieved from the Oracle Wallet based on the alias name associated with the user credentials.

There are two different types of password stores or wallets. One type is for database connect strings used in program arguments (such as `sqlplus /@db_username`). The other type is for Java application installation and application use.

## Setting Up Password Stores for Database User Accounts

After the database is installed and the default database user accounts are set up, administrators must set up a password store using the Oracle wallet. This involves assigning an alias for the username and associated password for each database user account. The alias is used later during the application installation. This password store must be created on the system where the application server and database client are installed.

This section describes the steps you must take to set up a wallet and the aliases for the database user accounts. For more information on configuring authentication and password stores, see the *Oracle Database Security Guide*.

---

---

**Note:** In this section, <wallet\_location> is a placeholder text for illustration purposes. Before running the command, ensure that you specify the path to the location where you want to create and store the wallet.

---

---

To set up a password store for the database user accounts, perform the following steps:

1. Create a wallet using the following command:

```
mkstore -wrl <wallet_location> -create
```

After you run the command, a prompt appears. Enter a password for the Oracle Wallet in the prompt.

---

---

**Note:** The `mkstore` utility is included in the Oracle Database Client installation.

---

---

The wallet is created with the auto-login feature enabled. This feature enables the database client to access the wallet contents without using the password. For more information, refer to the *Oracle Database Advanced Security Administrator's Guide*.

2. Create the database connection credentials in the wallet using the following command:

```
mkstore -wrl <wallet_location> -createCredential <alias-name> <database-user-name>
```

After you run the command, a prompt appears. Enter the password associated with the database user account in the prompt.

3. Repeat Step 2 for all the database user accounts.
4. Update the `sqlnet.ora` file to include the following statements:

```
WALLET_LOCATION = (SOURCE = (METHOD = FILE) (METHOD_DATA = (DIRECTORY =  
<wallet_location>)))  
SQLNET.WALLET_OVERRIDE = TRUE  
SSL_CLIENT_AUTHENTICATION = FALSE
```

5. Update the `tnsnames.ora` file to include the following entry for each alias name to be set up.

```
<alias-name> =  
  (DESCRIPTION =  
    (ADDRESS_LIST =  
      (ADDRESS = (PROTOCOL = TCP) (HOST = <host>) (PORT = <port>))  
    )  
    (CONNECT_DATA =  
      (SERVICE_NAME = <service>)  
    )  
  )
```

In the previous example, <alias-name>, <host>, <port>, and <service> are placeholder text for illustration purposes. Ensure that you replace these with the relevant values.

## Setting Up Wallets for Database User Accounts

The following examples show how to set up wallets for database user accounts for the following applications:

- For RMS, RPM Plsql Batch, RETL DB, RWMS batch, and ARI
- For Java Applications (SIM, ReIM, RPM, Alloc, RIB, RSL, AIP, RETL)

### For RMS, RPM Plsql Batch, RETL DB, RWMS batch, and ARI

For RMS, RPM Plsql Batch, RETL DB, RWMS batch, and ARI, do the following.

1. Create a new directory called wallet under your folder structure.

```
cd /projects/rms13.2/dev/
mkdir .wallet
```

---

**Note:** The default permissions of the wallet allow only the owner to use it, ensuring the connection information is protected. If you want other users to be able to use the connection, you must adjust permissions appropriately to ensure only authorized users have access to the wallet.

---

2. Create a sqlnet.ora in the wallet directory with the following content.

```
WALLET_LOCATION = (SOURCE = (METHOD = FILE) (METHOD_DATA =
(DIRECTORY = /projects/rms13.2/dev/.wallet)) )
SQLNET.WALLET_OVERRIDE=TRUE
SSL_CLIENT_AUTHENTICATION=FALSE
```

---

**Note:** WALLET\_LOCATION must be on line 1 in the file.

---

3. Setup a tnsnames.ora in the wallet directory. This tnsnames.ora includes the standard tnsnames.ora file. Then, add two custom tns\_alias entries that are only for use with the wallet. For example, sqlplus /@dvols29\_rms01user.

```
ifile = /u00/oracle/product/11.2.0.3/network/admin/tnsnames.ora
```

```
dvols29_rms01user =
(DESCRIPTION = (ADDRESS_LIST = (ADDRESS = (PROTOCOL = tcp)
(host = mspdv311.us.oracle.com) (Port = 1521)))
(CONNECT_DATA = (SID = dvols29) (GLOBAL_NAME = dvols29)))
```

```
dvols29_rms01user.world =
(DESCRIPTION = (ADDRESS_LIST = (ADDRESS = (PROTOCOL = tcp)
(host = mspdv311.us.oracle.com) (Port = 1521)))
(CONNECT_DATA = (SID = dvols29) (GLOBAL_NAME = dvols29)))
```

---

**Note:** It is important to not just copy the tnsnames.ora file because it can quickly become out of date. The ifile clause (shown above) is key.

---

4. Create the wallet files. These are empty initially.
  - a. Ensure you are in the intended location.

```
$ pwd
/projects/rms13.2/dev/.wallet
```
  - b. Create the wallet files.

```
$ mkstore -wrl . -create
```
  - c. Enter the wallet password you want to use. It is recommended that you use the same password as the UNIX user you are creating the wallet on.
  - d. Enter the password again.
5. Create the wallet entry that associates the user name and password to the custom tns alias that was setup in the wallet's tnsnames.ora file.

```
mkstore -wrl . -createCredential <tns_alias> <username> <password>
```

---

**Example:** `mkstore -wrl . -createCredential  
dvols29_rms01user rms01user passwd`

---

6. Test the connectivity. The ORACLE\_HOME used with the wallet must be the same version or higher than what the wallet was created with.

```
$ export TNS_ADMIN=/projects/rms13.2/dev/.wallet /* This is very import to use  
wallet to point at the alternate tnsnames.ora created in this example */
```

```
$ sqlplus /@dvols29_rms01user
```

```
SQL*Plus: Release 11
```

```
Connected to:  
Oracle Database 11g
```

```
SQL> show user  
USER is "rms01user"
```

Running batch programs or shell scripts would be similar:

```
Ex: dtesys /@dvols29_rms01user  
script.sh /@dvols29_rms01user
```

Set the UP unix variable to help with some compiles :

```
export UP=@dvols29_rms01user  
for use in RMS batch compiles, and RMS, RWMS, and ARI forms compiles.
```

As shown in the example above, users can ensure that passwords remain invisible.

### Additional Database Wallet Commands

The following is a list of additional database wallet commands.

- Delete a credential on wallet

```
mkstore -wrl . -deleteCredential dvols29_rms01user
```
- Change the password for a credential on wallet

```
mkstore -wrl . -modifyCredential dvols29_rms01user rms01user passwd
```

- List the wallet credential entries  
`mkstore -wrl . -list`  
 This command returns values such as the following.  
`oracle.security.client.connect_string1`  
`oracle.security.client.user1`  
`oracle.security.client.password1`
- View the details of a wallet entry  
`mkstore -wrl . -viewEntry oracle.security.client.connect_string1`  
 Returns the value of the entry:  
`dvo1s29_rms01user`  
`mkstore -wrl . -viewEntry oracle.security.client.user1`  
 Returns value of the entry:  
`rms01user`  
  
`mkstore -wrl . -viewEntry oracle.security.client.password1`  
 Returns value of the entry:  
`passwd`

## For Java Applications (SIM, ReIM, RPM, Alloc, RIB, RSL, AIP, RETL)

For Java application, consider the following:

- For database user accounts, ensure that you set up the same alias names between the password stores (database wallet and Java wallet). You can provide the alias name during the installer process.
- Document all aliases that you have set up. During the application installation, you must enter the alias names for the application installer to connect to the database and application server.
- Passwords are not used to update entries in Java wallets. Entries in Java wallets are stored in partitions, or application-level keys. In each retail application that has been installed, the wallet is located in  
`<WEBLOGIC_DOMAIN_HOME>/retail/<appname>/config` Example:  
`mspdV351:[103x_WLS] /u00/webadmin/product/10.3.x/WLS/user_projects/`  
`domains/132_mck_soa_domain/retail/reim13/config`
- Application installers should create the Java wallets for you, but it is good to know how this works for future use and understanding.
- Scripts are located in `<WEBLOGIC_DOMAIN_HOME>/retail/<appname>/retail-public-security-api/bin` for administering wallet entries.  
 Example:  
`mspdV351:[103x_WLS] /u00/webadmin/product/10.3.x/WLS/user_projects/`  
`domains/132_mck_soa_domain/retail/reim13/retail-public-security-api/bin`
- In this directory is a script to help you update each alias entry without having to remember the wallet details. For example, if you set the RPM database alias to `rms01user`, you will find a script called `update-RMS01USER.sh`.

---

**Note:** These scripts are available only with application installed by way of an installer.

---

- Two main scripts are related to this script in the folder for more generic wallet operations: `dump_credentials.sh` and `save_credential.sh`.

- If you have not installed the application yet, you can unzip the application zip file and view these scripts in <app>/application/retail-public-security-api/bin.

Example:

```
mspdev351:[103x_WLS] /u00/webadmin/reim/application/retail-public-security-api/bin
```

#### update-<ALIAS>.sh

update-<ALIAS>.sh updates the wallet entry for this alias. You can use this script to change the user name and password for this alias. Because the application refers only to the alias, no changes are needed in application properties files.

##### Usage:

```
update-<username>.sh <myuser>
```

##### Example:

```
mspdev71:[103xWLS]
/u00/webadmin/product/10.3.x/WLS/user_projects/domains/java_domain/retail/rpml
32test/retail-public-security-api/bin> ./update-RMS01USER.sh
usage: update-RMS01USER.sh <username>
```

<username>: the username to update into this alias.

Example: update-RMS01USER.sh myuser

Note: this script will ask you for the password for the username that you pass in.

```
mspdev71:[103xWLS]
/u00/webadmin/product/10.3.x/WLS/user_projects/domains/java_domain/retail/rpml
32test/retail-public-security-api/bin>
```

#### dump\_credentials.sh

dump\_credentials.sh is used to retrieve information from the wallet. For each entry found in the wallet, the wallet partition, the alias, and the user name are displayed. Note that the password is not displayed. If the value of an entry is uncertain, run save\_credential.sh to resave the entry with a known password.

```
dump_credentials.sh <wallet location>
```

##### Example:

```
dump_credentials.sh
/u00/webadmin/product/10.3.x/WLS/user_projects/domains/132_mck_soa_domain/retail/reim13/config
```

```
Retail Public Security API Utility
```

```
=====
```

```
Below are the credentials found in the wallet at the
location:/u00/webadmin/product/10.3.x/WLS/user_projects/domains/132_mck_soa_domain/retail/reim13/config
```

```
=====
```

```
Application level key partition name:reim13
User Name Alias:WLS-ALIAS User Name:weblogic
User Name Alias:RETAIL-ALIAS User Name:retail.user
User Name Alias:LDAP-ALIAS User Name:RETAIL.USER
User Name Alias:RMS-ALIAS User Name:rms132mock
User Name Alias:REIMBAT-ALIAS User Name:reimbat
```

**save\_credential.sh**

save\_credential.sh is used to update the information in wallet. If you are unsure about the information that is currently in the wallet, use dump\_credentials.sh as indicated above. You can add new or update using save\_credential.sh as shown below:

```
save_credential.sh -a <alias> -u <user> -p <partition name> -l <path of the
wallet file location where credentials are stored>
```

**Example:**

```
mispdv351:[103x_WLS]
/u00/webadmin/mock132_testing/rtil/rtil/application/retail-public-security-
api/bin> save_credential.sh -l
/u00/webadmin/product/10.3.x/WLS/user_projects/domains/132_mck_soa_domain/reta
il/reiml3/config
-a RMS-ALIAS -p reiml3 -u rms132mock
```

```
=====
Retail Public Security API Utility
=====
```

```
Enter password:
Verify password:
```

---

**Note:** -p in the above command is for partition name. You must specify the proper partition name used in application code for each Java application.

save\_credential.sh and dump\_credentials.sh scripts are the same for all applications. If using save\_credential.sh to add a wallet entry or to update a wallet entry, bounce the application/managed server so that your changes are visible to the application. Also, save a backup copy of your cwallet.sso file in a location outside of the deployment path, because redeployment or reinstallation of the application will wipe the wallet entries you made after installation of the application. To restore your wallet entries after a redeployment/reinstallation, copy the backed up cwallet.sso file over the cwallet.sso file. Then bounce the application/managed server.

---

**Usage**

```
=====
Retail Public Security API Utility
=====
usage: save_credential.sh -au[plh]
E.g. save_credential.sh -a rms-alias -u rms_user -p rib-rms -l ./
-a,--userNameAlias <arg>          alias for which the credentials
needs to be stored
-h,--help                          usage information
-l,--locationofWalletDir <arg>    location where the wallet file is
created.If not specified, it creates the wallet under secure-credential-wallet
directory which is already present under the retail-public-security-api/
directory.
-p,--appLevelKeyPartitionName <arg> application level key partition name
-u,--userName <arg>              username to be stored in secure
credential wallet for specified alias*
```

## How Does the Wallet Relate to the Application?

The ORACLE Retail Java applications have the wallet alias information you create in an <app-name>.properties file. Below is the reim.properties file. Note the database information and the user are presented as well. The property called `datasource.credential.alias=RMS-ALIAS` uses the ORACLE wallet with the argument of RMS-ALIAS at the `csm.wallet.path` and `csm.wallet.partition.name = reim13` to retrieve the password for application use.

Reim.properties code sample:

```
datasource.url=jdbc:oracle:thin:@mspdv349.us.oracle.com:1521:pkols07
datasource.schema.owner=rms132mock
datasource.credential.alias=RMS-ALIAS
# =====
# ossa related Configuration
#
# These settings are for ossa configuration to store credentials.
# =====

csm.wallet.path=/u00/webadmin/product/10.3.x/WLS/user_projects/domains/132_mck_soa
_domain/retail/reim13/config
csm.wallet.partition.name=reim13
```

## How Does the Wallet Relate to Java Batch Program Use?

Some of the ORACLE Retail Java batch applications have an alias to use when running Java batch programs. For example, alias REIMBAT-ALIAS maps through the wallet to REIM app user reimbat, already on the database. To run a ReIM batch program the format would be: `reimbatchpgmname REIMBAT-ALIAS <other arguments as needed by the program in question>`.

## Setting up RETL Wallets

RETL creates a wallet under `$RFX_HOME/etc/security`, with the following files:

- `cwallet.sso`
- `jazn-data.xml`
- `jps-config.xml`
- `README.txt`

To set up RETL wallets, perform the following steps:

1. Set the following environment variables:
  - `ORACLE_SID=<retaildb>`
  - `RFX_HOME=/u00/rfx/rfx-13.2.0`
  - `RFX_TMP=/u00/rfx/rfx-13.2.0/tmp`
  - `JAVA_HOME=/usr/jdk1.6.0_12.64bit`
  - `LD_LIBRARY_PATH=$ORACLE_HOME`
  - `PATH=$RFX_HOME/bin:$JAVA_HOME/bin:$PATH`
2. Change directory to `$RFX_HOME/bin`.
3. Run `setup-security-credential.sh`.
  - Enter 1 to add a new database credential.
  - Enter the dbuseralias. For example, `retl_java_rms01user`.
  - Enter the database user name. For example, `rms01user`.

- Enter the database password.
  - Re-enter the database password.
  - Enter D to exit the setup script.
4. Update your RETL environment variable script to reflect the names of both the Oracle Networking wallet and the Java wallet.
- For example, to configure RETLforRPAS, modify the following entries in `$MMHOME/RETLforRPAS/rfx/etc/rmse_rpas_config.env`.
- The RETL\_WALLET\_ALIAS should point to the Java wallet entry:  
`export RETL_WALLET_ALIAS="retl_java_rms01user"`
  - The ORACLE\_WALLET\_ALIAS should point to the Oracle network wallet entry:  
`export ORACLE_WALLET_ALIAS="dvols29_rms01user"`
  - The SQLPLUS\_LOGON should use the ORACLE\_WALLET\_ALIAS:  
`export SQLPLUS_LOGON="/@${ORACLE_WALLET_ALIAS}"`
5. To change a password later, run `setup-security-credential.sh`.
- Enter 2 to update a database credential.
  - Select the credential to update.
  - Enter the database user to update or change.
  - Enter the password of the database user.
  - Re-enter the password.



## Quick Guide for Retail Wallets

Retail App	Wallet Type	Wallet Location	Wallet Partition	Alias Name	User Name	Use	Create By	Alias Example	Notes
<b>RMS batch</b>	DB	<RMS batch install dir (MMHOME)>/.wallet	n/a	<Database SID>_<Database schema owner>	<rms schema owner>	Compile, execution	Installer	n/a	Alias hard-coded by installer
<b>RMS forms</b>	DB	<forms install dir>/base/.wallet	n/a	<Database SID>_<Database schema owner>	<rms schema owner>	Compile	Installer	n/a	Alias hard-coded by installer
<b>ARI forms</b>	DB	<forms install dir>/base/.wallet	n/a	<Db_Ari01 >	<ari schema owner>	Compile	Manual	ari-alias	
<b>RMWS forms</b>	DB	<forms install dir>/base/.wallet	n/a	<Database SID>_<Database schema owner>	<rwms schema owner>	Compile forms, execute batch	Installer	n/a	Alias hard-coded by installer
<b>RPM app</b>	DB	<RPM batch install dir>/.wallet	n/a	<rms schema owner alias>	<rms schema owner>	Execute batch	Manual	rms-alias	
<b>RWMS auto-login</b>	JAVA	<forms install dir>/base/.javawallet							
			<RWMS Installation name>	<RWMS database user alias>	<RWMS schema owner>	RWMS forms app to avoid dblogin screen	Installer	rwms13inst	
			<RWMS Installation name>	BI_ALIAS	<BI Publisher administrative user>	RWMS forms app to connect to BI Publisher	Installer	n/a	Alias hard-coded by installer
<b>AIP app</b>	JAVA	<weblogic domain home>/retail/<deployed aip app name>/config							Each alias must be unique
			aip13	<AIP weblogic user alias>	<AIP weblogic user name>	App use	Installer	aip-weblogic-alias	
			aip13	<AIP database schema user alias>	<AIP database schema user name>	App use	Installer	aip01user-alias	

Retail App	Wallet Type	Wallet Location	Wallet Partition	Alias Name	User Name	Use	Create By	Alias Example	Notes
			aip13	<rib-aip weblogic user alias>	<rib-aip weblogic user name>	App use	Installer	rib-aip-weblogic-alias	
<b>RPM app</b>	JAVA	<weblogic domain home>/retail/<deployed rpm app name>/config							Each alias must be unique
			rpm13	<rpm weblogic user alias>	<rpm weblogic user name>	App use	Installer	rpm-weblogic-alias	
			rpm13	<rms shema user alias>	<rms shema user name>	App, batch use	Installer	rms01user-alias	
			rpm13	<rpm application user one alias>	<rpm application user one name>	App use	Installer	user1-alias	
			rpm13	<rpm application user two alias>	<rpm application user two name>	App use	Installer	user2-alias	
			rpm13	<rpm batch user alias>	<rpm batch user name>	App, batch use	Installer	rpmbatch-alias	
			rpm13	<rib-rpm weblogic user alias>	<rib-rpm weblogic user name>	App use	Installer	rib-rpm-weblogic-alias	
<b>ReIM app</b>	JAVA	<weblogic domain home>/retail/<deployed reim app name>/config							Each alias must be unique
			<installed app name>	<reim weblogic user alias>	<reim weblogic user name>	App use	Installer	weblogic-alias	
			<installed app name>	<rms shema user alias>	<rms shema user name>	App, batch use	Installer	rms01user-alias	
			<installed app name>	<reim webservice validation user alias>	<reim webservice validation user name>	App use	Installer	reimwebsevice-alias	
			<installed app name>	<reim batch user alias>	<reim batch user name>	App, batch use	Installer	reimbatch-alias	

Retail App	Wallet Type	Wallet Location	Wallet Partition	Alias Name	User Name	Use	Create By	Alias Example	Notes
<b>Alloc app</b>	JAVA	<weblogic domain home>/retail/<deployed alloc app name>/config							Each alias must be unique
			<installed app name>	<alloc weblogic user alias>	<alloc weblogic user name>	App use	Installer	weblogic-alias	
			<installed app name>	<rms shema user alias>	<rms shema user name>	App use	Installer	rms01user-alias	
			<installed app name>	<rsl for rms weblogic user alias>	<rsl for rms weblogic user name>	App use	Installer	rsl-rms-weblogic-alias	
<b>RSL app</b>	JAVA	<RSL INSTALL DIR>/rsl-rms/security/config							Each alias must be unique
			rsl-rsm	<rsl weblogic user alias>	<rsl weblogic user name>	App use	Installer	weblogic-alias	
			rsl-rsm	<rms shema user alias>	<rms shema user name>	App use	Installer	rms01user-alias	
<b>SIM app</b>	JAVA	<weblogic domain home>/retail/<deployed sim app name>/config							
			rpm	<rpm weblogic user alias>	<rpm weblogic user name>	App use	Installer	rpm-weblogic-alias	
			rms	<rsl for rms weblogic user alias>	<rsl for rms weblogic user name>	App use	Installer	rsl-rms-weblogic-alias	
			rib-sim	<rib-sim weblogic user alias>	<rib-sim weblogic user name>	App use	Installer	rib-sim-weblogic-alias	
<b>RETL</b>	JAVA	<RETL home>/etc/security	n/a	<target application user alias>	<target application db userid>	App use	Manual	retl_java_rms01user	User may vary depending on RETL flow's target application

Retail App	Wallet Type	Wallet Location	Wallet Partition	Alias Name	User Name	Use	Create By	Alias Example	Notes
RETL	DB	<RETL home>/wallet	n/a	<target application user alias>	<target application db userid>	App use	Manual	<db>_<user>	User may vary depending on RETL flow's target application
RIB	JAVA	<RIBHOME DIR>/deployment-home/conf/security							<app> is one of aip, rfm, rms, rpm, sim, rwms, tafr
JMS			jms<1-5>	<jms user alias> for jms<1-5>	<jms user name> for jms<1-5>	Integration use	Installer	jms-alias	
WebLogic			rib-<app>-app-server-instance	<rib-app weblogic user alias>	<rib-app weblogic user name>	Integration use	Installer	weblogic-alias	
Admin GUI			rib-<app>#web-app-user-alias	<rib-app admin gui user alias>	<rib-app admin gui user name>	Integration use	Installer	admin-gui-alias	
Application			rib-<app>#user-alias	<app weblogic user alias>	<app weblogic user name>	Integration use	Installer	app-user-alias	Valid only for aip, rpm, sim
DB			rib-<app>#app-db-user-alias	<rib-app database schema user alias>	<rib-app database schema user name>	Integration use	Installer	db-user-alias	Valid only for rfm, rms, rwms, tafr
Error Hospital			rib-<app>#hosp-user-alias	<rib-app error hospital database schema user alias>	<rib-app error hospital database schema user name>	Integration use	Installer	hosp-user-alias	

---

---

## Appendix: Optional Security

The following scripts could be used to lock down permissions on the RWMS owning schema. Note that the grant script must be run before applying each hot fix or patch to the schema.

### (Optional) Grant Necessary Install Permissions

If you ran the optional `revoke_rwms_admin_privs.sql` script to secure the permissions for the RWMS schema, you must grant additional permissions before running the database installation.

To grant necessary install permissions to the RWMS schema, run the following script as the database sys user.

```
DB_PATCH_DIR/rwms/dbschemapatch/util/grant_rwms_admin_privs.sql
```

---

---

**Note:** After completing installation, run the revoke script to restore the optional secure permissions on the RWMS schema.

---

---

### (Optional) Revoke Install Permissions

After completing database installation, you can secure the RWMS schema by granting only the minimum required permissions. To do this, run the following script as the database sys user.

```
DB_PATCH_DIR/rwms/dbschemapatch/util/revoke_rwms_admin_privs.sql
```

### Recompile Invalid Objects

After running the revoke script, recompile all invalid database objects.



---

---

## Appendix: Web Browser Configuration

This appendix provides information on configuring Internet Explorer and Mozilla Firefox Web browsers for operation with RWMS.

---

---

**Note:** The Oracle's Java Runtime Environment (JRE) is required to support Applets within a sandboxed security environment in the Web browser. The security architecture of the JRE has changed from JRE1.7 and requires additional configuration in Windows.

---

---

### Microsoft Internet Explorer Version 9.0

---

---


**Note:** Before proceeding, ensure that you have the JRE 1.7 installed.

---

---


To configure the latest JRE for Internet Explorer 9, do the following.

1. Use the Windows Control Panel and open the **Java** Control Panel.
2. Select the **Java** tab in the Java Control Panel, and click **View** to confirm that the JRE1.7 product is installed and enabled.

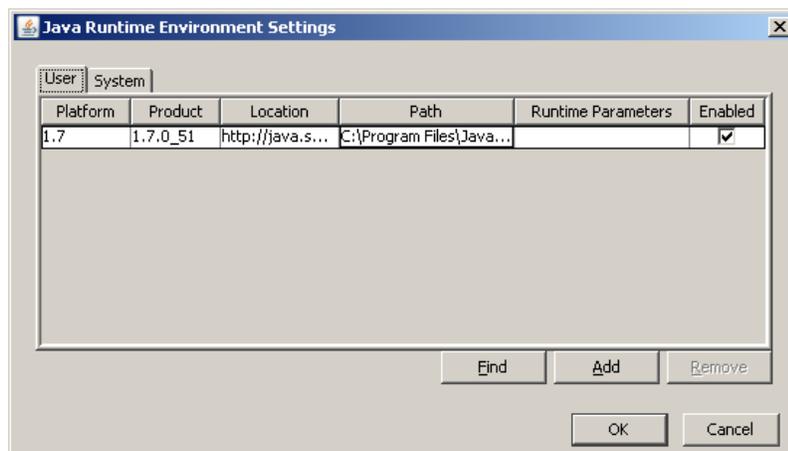


**Java Runtime Environment Settings Window**

3. Click **OK** and return back to the Java Control Panel.
4. Click the **Advanced** tab.

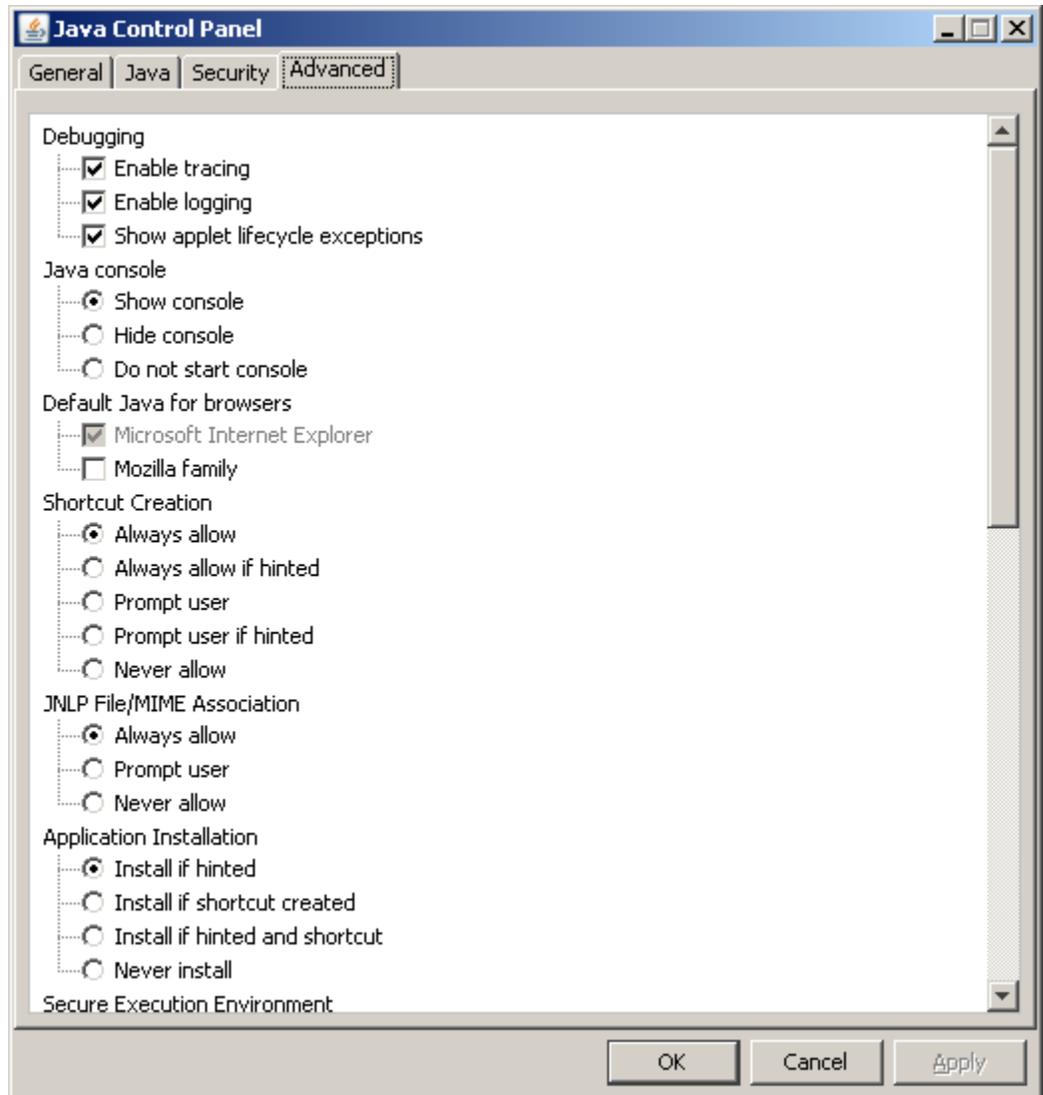

**Options in the Advanced Tab**

5. Navigate to **Mixed code** section.

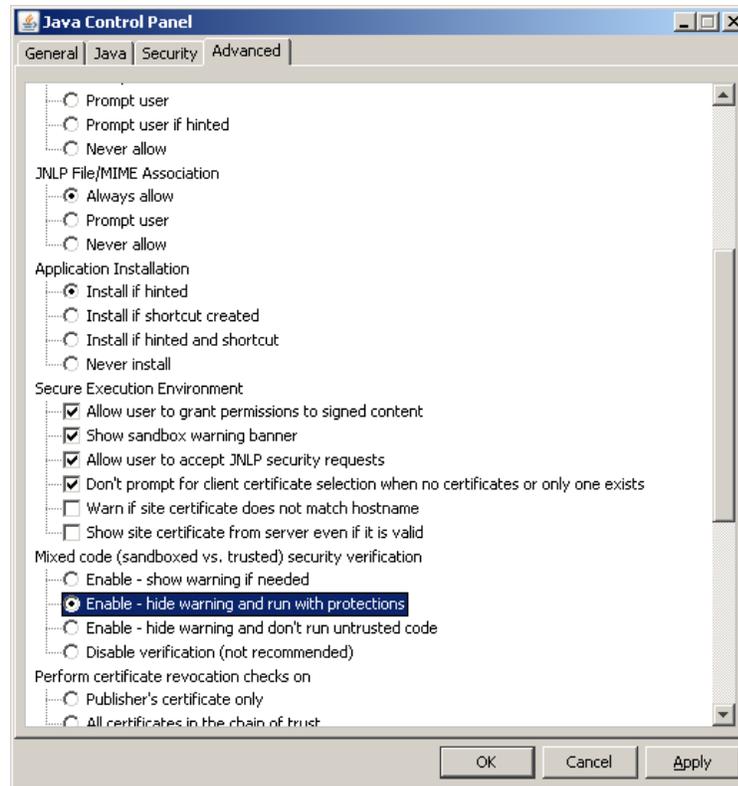

**Mixed Code Settings in Java Control Panel**

6. Click the **Enable – hide warning and run with protections** option to stop warning popup messages from appearing, but still enables the Java applet code to execute with protection.
7. Restart your Web browser to run the RWMS Forms displays.

## Mozilla Firefox Version 17 ESR

Mozilla Firefox supports a JRE sandboxed environment in a different manner to Internet Explorer with additional plug-ins to support specific versions of the Java Console for the JREs. Firefox includes the accurate JPI versions. The formsweb.cfg file defines how Web browsers handle Forms applets. The browser is instructed to use the Java Platform Interface (JPI) for applets using the following entry in the formsweb.cfg file located at <FORMSDOMAIN\_HOME>/config/fmwconfig/servers/WLS\_FORMS/applications/formsapp\_11.1.2/config:

```
jpi_mimetype=application/x-java-applet;jpi-version=1.6.0_12
```

Update this entry to the following to make Firefox work:

```
jpi_mimetype=application/x-java-applet
```

---

**Note:** No server restart is required for this to work.

---

This does not impact the operation of Internet Explorer Web browsers configured as described in the previous section.

Firefox sets the plug-in interfaces it uses, so by removing the version details it can now use the relevant JRE installed. You must also configure the Firefox Web browser to ignore warnings about pages that use low grade security in the Options menu under the Security tab (in a similar way to Internet Explorer).

---

---

## Appendix: Installation Order

This section provides a guideline as to the order in which the Oracle Retail applications should be installed. If a retailer has chosen to use some, but not all, of the applications the order is still valid less the applications not being installed.

---

---

**Note:** The installation order is not meant to imply integration between products.

---

---

### Enterprise Installation Order

1. Oracle Retail Merchandising System (RMS), Oracle Retail Trade Management (RTM), Oracle Retail Sales Audit (ReSA). Optional: Oracle Retail Fiscal Management (ORFM)

---

---

**Note:** ORFM is an optional application for RMS if you are implementing Brazil localization.

---

---

2. Oracle Retail Service Layer (RSL)
3. Oracle Retail Extract, Transform, Load (RETL)
4. Oracle Retail Active Retail Intelligence (ARI)
5. Oracle Retail Warehouse Management System (RWMS)
6. Oracle Retail Invoice Matching (ReIM)
7. Oracle Retail Price Management (RPM)

---

---

**Note:** During installation of RPM, you are asked for the RIBforRPM provider URL. Because RIB is installed after RPM, make a note of the URL you enter. To change the RIBforRPM provider URL after you install RIB, edit the `remote_service_locator_info_ribserver.xml` file.

---

---

8. Oracle Retail Allocation
9. Oracle Retail Central Office (ORCO)
10. Oracle Retail Returns Management (ORRM)
11. Oracle Retail Back Office (ORBO) or Back Office with Labels and Tags (ORLAT)
12. Oracle Retail Store Inventory Management (SIM)

---

---

**Note:** During installation of SIM, you are asked for the RIB provider URL. Because RIB is installed after SIM, make a note of the URL you enter. To change the RIB provider URL after you install RIB, edit the `remote_service_locator_info_ribserver.xml` file.

---

---

13. Oracle Retail Predictive Application Server (RPAS)
14. Oracle Retail Demand Forecasting (RDF)
15. Oracle Retail Category Management (CM)
16. Oracle Retail Replenishment Optimization (RO)
17. Oracle Retail Analytic Parameter Calculator Replenishment Optimization (APC RO)

18. Oracle Retail Regular Price Optimization (RPO)
19. Oracle Retail Merchandise Financial Planning (MFP)
20. Oracle Retail Size Profile Optimization (SPO)
21. Oracle Retail Assortment Planning (AP)
22. Oracle Retail Item Planning (IP)
23. Oracle Retail Item Planning Configured for COE (IP COE)
24. Oracle Retail Advanced Inventory Planning (AIP)
25. Oracle Retail Integration Bus (RIB)
26. Oracle Retail Point-of-Service (ORPOS)
27. Oracle Retail Markdown Optimization (MDO)
28. Oracle Retail Clearance Optimization Engine (COE)
29. Oracle Retail Analytic Parameter Calculator for Markdown Optimization (APC-MDO)
30. Oracle Retail Analytic Parameter Calculator for Regular Price Optimization (APC-RPO)
31. Oracle Retail Promotion Intelligence and Promotion Planning and Optimization (PI-PPO)
32. Oracle Retail Analytics
33. Oracle Retail Workspace (ORW)