

Oracle® Retail Macro Space Management
Data Importer User Guide
Release 13.2.3

August 2011

Copyright © 2011, Oracle. All rights reserved.

Primary Author: Phil Wells

Contributors: Anshuman Accanoor

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this software or related documentation is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation shall be subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License (December 2007). Oracle USA, Inc., 500 Oracle Parkway, Redwood City, CA 94065.

This software is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications which may create a risk of personal injury. If you use this software in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure the safe use of this software. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software in dangerous applications.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

This software and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

Value-Added Reseller (VAR) Language

Oracle Retail VAR Applications

The following restrictions and provisions only apply to the programs referred to in this section and licensed to you. You acknowledge that the programs may contain third party software (VAR applications) licensed to Oracle. Depending upon your product and its version number, the VAR applications may include:

(i) the **MicroStrategy** Components developed and licensed by MicroStrategy Services Corporation (MicroStrategy) of McLean, Virginia to Oracle and imbedded in the MicroStrategy for Oracle Retail Data Warehouse and MicroStrategy for Oracle Retail Planning & Optimization applications.

(ii) the **Wavelink** component developed and licensed by Wavelink Corporation (Wavelink) of Kirkland, Washington, to Oracle and imbedded in Oracle Retail Mobile Store Inventory Management.

(iii) the software component known as **Access Via**™ licensed by Access Via of Seattle, Washington, and imbedded in Oracle Retail Signs and Oracle Retail Labels and Tags.

(iv) the software component known as **Adobe Flex**™ licensed by Adobe Systems Incorporated of San Jose, California, and imbedded in Oracle Retail Promotion Planning & Optimization application.

You acknowledge and confirm that Oracle grants you use of only the object code of the VAR Applications. Oracle will not deliver source code to the VAR Applications to you. Notwithstanding any other term or condition of the agreement and this ordering document, you shall not cause or permit alteration of any VAR Applications. For purposes of this section, "alteration" refers to all alterations, translations, upgrades, enhancements, customizations or modifications of all or any portion of the VAR Applications including all reconfigurations, reassembly or reverse assembly, re-engineering or reverse engineering and recompilations or reverse compilations of the VAR Applications or any derivatives of the VAR Applications. You acknowledge that it shall be a breach of the agreement to utilize the relationship, and/or confidential information of the VAR Applications for purposes of competitive discovery.

The VAR Applications contain trade secrets of Oracle and Oracle's licensors and Customer shall not attempt, cause, or permit the alteration, decompilation, reverse engineering, disassembly or other reduction of the VAR Applications to a human perceivable form. Oracle reserves the right to replace, with functional equivalent software, any of the VAR Applications in future releases of the applicable program.

Content

Send Us Your Comments	vi
Preface	vii
Documentation Accessibility.....	vii
Related Documents.....	vii
Customer Support.....	viii
Review Patch Documentation.....	viii
Oracle Retail Documentation on the Oracle Technology Network.....	viii
Conventions.....	viii
Overview of Data Importer	1
Important Note for Users.....	1
What is Data Importer?	1
CSV File.....	6
Import Type dialog box.....	9
Preparing to Configure Data Importer	30
The AVTTB_NEXTID Table	32
Overview of Worked Examples	32
About Points to Watch	89
If the Start Line is incorrect, Data Importer will read the wrong data	89

Send Us Your Comments

Oracle Retail Space Management, Data Importer User Guide, Release 13.2.3

Oracle welcomes customers' comments and suggestions on the quality and usefulness of this document.

Your feedback is important, and helps us to best meet your needs as a user of our products. For example:

- Are the implementation steps correct and complete?
- Did you understand the context of the procedures?
- Did you find any errors in the information?
- Does the structure of the information help you with your tasks?
- Do you need different information or graphics? If so, where, and in what format?
- Are the examples correct? Do you need more examples?

If you find any errors or have any other suggestions for improvement, then please tell us your name, the name of the company who has licensed our products, the title and part number of the documentation and the chapter, section, and page number (if available).

Note: Before sending us your comments, you might like to check that you have the latest version of the document and if any concerns are already addressed. To do this, access the new Applications Release Online Documentation CD available on My Oracle Support and www.oracle.com. It contains the most current Documentation Library plus all documents revised or released recently.

Send your comments to us using the electronic mail address: retail-doc_us@oracle.com
Please give your name, address, electronic mail address, and telephone number (optional).

If you need assistance with Oracle software, then please contact your support representative or Oracle Support Services.

If you require training or instruction in using Oracle software, then please contact your Oracle local office and inquire about our Oracle University offerings. A list of Oracle offices is available on our Web site at www.oracle.com.

Preface

This guide enables you to configure the Oracle Retail Space Management, along with the server-side components required for the application.

Documentation Accessibility

Our goal is to make Oracle products, services, and supporting documentation accessible to all users, including users that are disabled. To that end, our documentation includes features that make information available to users of assistive technology. This documentation is available in HTML format, and contains markup to facilitate access by the disabled community. Accessibility standards will continue to evolve over time, and Oracle is actively engaged with other market-leading technology vendors to address technical obstacles so that our documentation can be accessible to all of our customers. For more information, visit the Oracle Accessibility Program Web site at <http://www.oracle.com/accessibility/>.

Accessibility of Code Examples in Documentation

Screen readers may not always correctly read the code examples in this document. The conventions for writing code require that closing braces should appear on an otherwise empty line; however, some screen readers may not always read a line of text that consists solely of a bracket or brace.

Accessibility of Links to External Web Sites in Documentation

This documentation may contain links to Web sites of other companies or organizations that Oracle does not own or control. Oracle neither evaluates nor makes any representations regarding the accessibility of these Web sites.

Access to Oracle Support

Oracle customers have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/support/contact.html> or visit <http://www.oracle.com/accessibility/support.html> if you are hearing impaired.

Related Documents

For more information, see the following documents in the Oracle Retail Macro Space Management Release 13.2.3 documentation set:

- *Oracle Retail Macro Space Management Administration User Guide*
- *Oracle Retail Macro Space Management Administration Module Online Help*
- *Oracle Retail Macro Space Management Configuration User Guide*
- *Oracle Retail Macro Space Management Configuration Module Online Help*
- *Oracle Retail Macro space Management Data Importer Online Help*
- *Oracle Retail Macro Space Management Fixture Studio User Guide*
- *Oracle Retail Macro Space Management Fixture Studio Online Help*
- *Oracle Retail Macro Space Management Product Studio User Guide*
- *Oracle Retail Macro Space Management Product Studio Online Help*
- *Oracle Retail Macro Space Management Store Planning User Guide*
- *Oracle Retail Macro Space Management Store Planning Online Help*

- *Oracle Retail Macro Space Management Report Designer User Guide*
- *Oracle Retail Macro Space Management Report Designer Online Help*
- *Oracle Retail Macro Space Management Release Notes*
- *Oracle Retail Macro Space Planning Install Guide*
- *Oracle Retail Macro Space Planning License Information*

For more information on In-Store Space Collaboration see the following documents in the Oracle Retail In-Store Space Collaboration Release 13.2.3 documentation set:

- *Oracle Retail In-Store Space Collaboration User's Guide*
- *Oracle Retail In-Store Space Collaboration Online Help*
- *Oracle Retail In-Store Space Collaboration Release Notes*

Customer Support

To contact Oracle Customer Support, access My Oracle Support at the following URL:

<https://support.oracle.com>

When contacting Customer Support, please provide the following:

- Product version and program/module name
- Functional and technical description of the problem (include business impact)
- Detailed step-by-step instructions to re-create
- Exact error message received
- Screen shots of each step you take

Review Patch Documentation

When you install the application for the first time, you install either a base release (for example, 13.1) or a later patch release (for example, 13.1.2). If you are installing the base release and additional patch and bundled hot fix releases, read the documentation for all releases that have occurred since the base release before you begin installation.

Documentation for patch and bundled hot fix releases can contain critical information related to the base release, as well as information about code changes since the base release.

Oracle Retail Documentation on the Oracle Technology Network

Documentation is packaged with each Oracle Retail product release. Oracle Retail product documentation is also available on the following Web site:

http://www.oracle.com/technology/documentation/oracle_retail.html

(Data Model documents are not available through Oracle Technology Network. These documents are packaged with released code, or you can obtain them through My Oracle Support.)

Documentation should be available on this Web site within a month after a product release.

Conventions

Navigate: This is a navigate statement. It tells you how to get to the start of the procedure and ends with a screen shot of the starting point and the statement “the Window Name window opens.”

This is a code sample

It is used to display examples of code


Overview of Data Importer

Important Note for Users

Important: Data Importer can be used at several levels. It is possible for a normal Macro Space Management user to run a pre-configured import by selecting a few options in the Data Importer GUI. It is also possible for a user with Administrator's rights to configure the basic parameters determining how a specific import of data works. Users configuring the way data imports need an understanding of the Macro Space Management database schema and a good knowledge of how to write SQL statements. If you do not have these two skills, Oracle **STRONGLY** recommends that you do not attempt to configure the Data Import module.

What is Data Importer?

Data Importer allows users to import data into Macro Space Management.

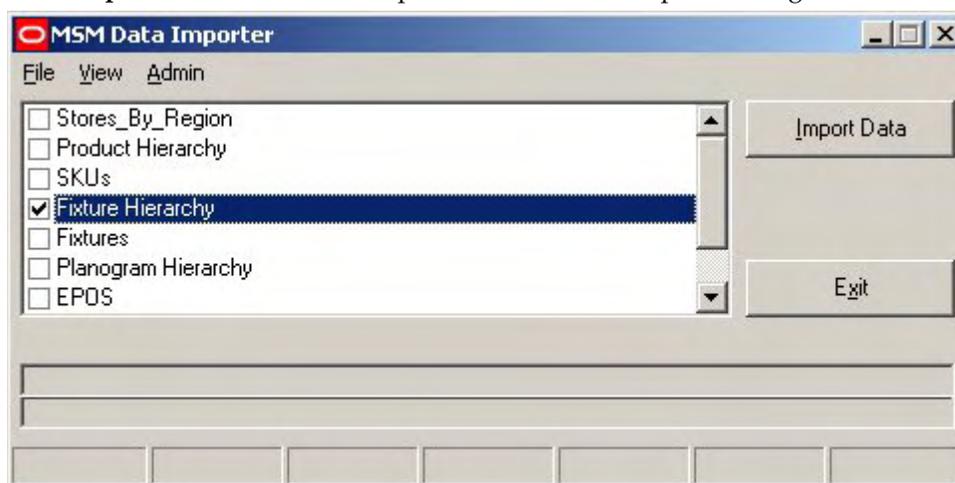

It takes data in one of the three following formats:

- CSV (Comma Separated Value)
- Spreadsheet
- XML File (Extensible Mark-up Language)

and inserts the data into the central Macro Space Management database.

The data to be imported must be in a rigidly defined format that is not changed:

Fixture Name	Fixture Length	Fixture Depth	Fixture Height	File Name
Back Panel-1	600	10	1250	Back_panel_1.dwg
Back Panel-2	600	10	1500	Back_panel_1.dwg
Back Panel-3	800	10	1800	Back_panel_1.dwg

Data Importer will then put this into very specific places within the central Macro Space Management database. For example, Fixture Name and File Name might go into the FIXTURE_INFO table and the fixture length, depth and height might go into the FIXTURE_DIMENSIONS table.

This imported data then becomes usable in Macro Space Management.

Using Data Importer

There are 3 basic levels of using Data Importer

1. Via the GUI
2. Via the Command Line
3. Configuring Data Importer

Via the GUI

Standard users operating the Data Importer via the Graphical User Interface (GUI) can select the data to import by means of the check boxes, click on the Import Data button then check the error logs to confirm correct import of data.



Via the Command Line


Users operating via the command line can use switches to determine which data to import.

This form of operation is usually used in conjunction with automatic scheduling so data import can be carried out automatically overnight.

Configuring Data Importer

Users can configure the exact manner data is imported using the Data Importer. To do this you must have Administrators rights.

Using <Ctrl + A> will toggle an additional menu into view.

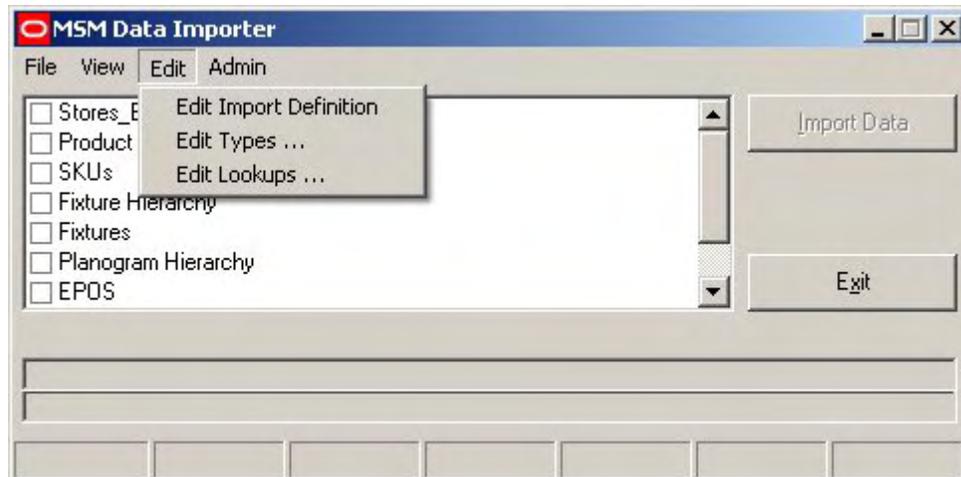

This allows users to modify Import Types, Look-up Values and Import Definitions.

The Import Types Dialogue Box


The **Import Types dialogue box** (available to Admin Users only) allows users to set up lists of basic Admin types.

ID	Desc	Sequence	Active	Import	Command	Options
1	Stores_By_Region	1	✓	✓	STORES_BY_REGION	0
2	Product Hierarchy	2	✓	✓	CATEGORIES	0
3	SKUs	3	✓	✓	SKUS	0
4	Fixtures	5	✓	✓	FIXTURES	0
5	Fixture Hierarchy	4	✓	✓	FIXGROUP	0
6	Planogram Hierarchy	6	✓	✓	POGHIER	0
7	EPOS	7	✓	✓	EPOS	0
8	Clusters_By_Store_Code	8	✓	✓	CLUSTERS_BY_STORE_CODE	0
9	Stores_By_Store_Code	9	✓	✓	STORES_BY_STORE_CODE	0

9 records

The Lookups Dialogue Box


The Lookups dialogue box allows users to define Look-ups.

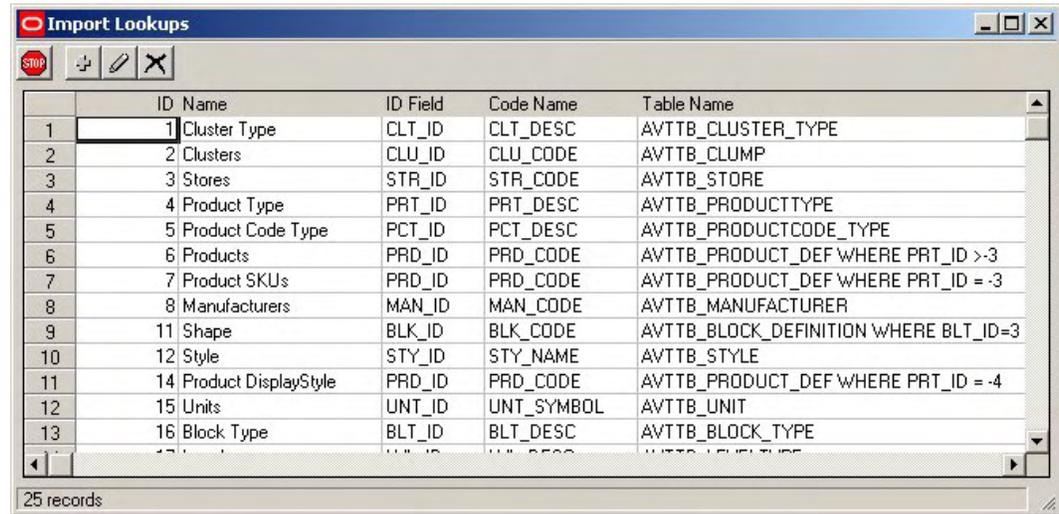

Look ups allow users to convert one form of data being imported into another - for example the name of a cluster might be converted into its (numerical) primary key.

The Import Definition Dialogue Box

The Import Definition dialogue box allows users to configure Import Definitions.

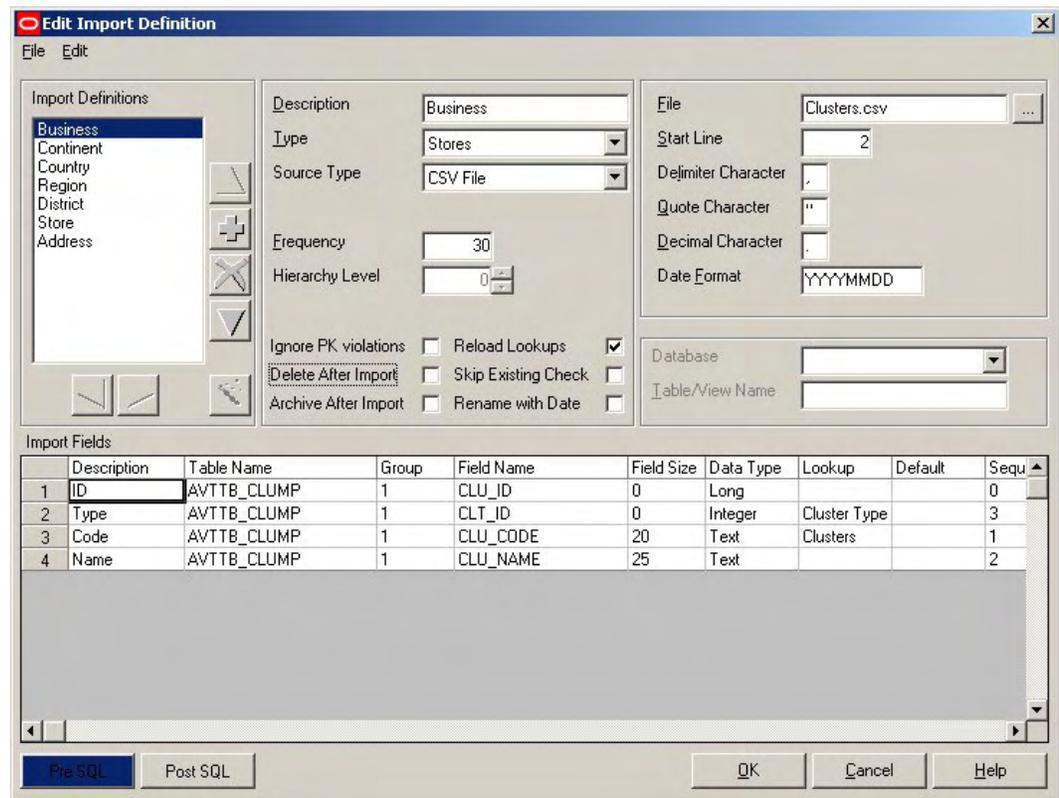

This allows users to configure how data is extracted from the source file (in this example Fixtures.csv) and inserted into the database.

The Import Log Dialogue Box

The Import Log dialogue box allows users to see the results of recent data imports.

ID	Type	Started	Finished	Added	Updated	Deleted	Skipped	Failed
1	EPOS - EPOS	14/03/2009 21:44:17	14/03/2009 21:45:31	920	0	0	0	4773
2	EPOS - EPOS	14/03/2009 21:46:30	14/03/2009 21:47:44	0	920	0	0	4773
3	EPOS - EPOS	14/03/2009 21:55:26	14/03/2009 21:57:22	309	920	0	0	4777
4	EPOS - EPOS	15/03/2009 14:56:43	15/03/2009 14:58:18	1634	143	0	0	4781
5	EPOS - EPOS	23/03/2009 19:19:18	23/03/2009 19:20:14	2681	31	0	0	0
6	Fixtures - Block Links	25/03/2009 08:30:52	25/03/2009 08:30:53	2	0	0	0	8

7 records

The Import Error Log Dialogue Box

The Import Error Log dialogue box allows users to see details of any errors that might have resulted during recent data imports.

ID	Type	Message	Severity	Error	Input
236	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0039,FY2008 wk41,,9175
237	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0042,FY2008 wk41,,8145
238	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0044,FY2008 wk41,,6337
239	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0045,FY2008 wk41,,3074
240	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0046,FY2008 wk41,,2653
241	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0047,FY2008 wk41,,1051
242	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0053,FY2008 wk41,,4773
243	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0055,FY2008 wk41,,1360
244	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0057,FY2008 wk41,,6441
245	EPOS	Unable to lookup PRD_ID for value 092/0059	1	0	45,092/0059,FY2008 wk41,,1360
246	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0059,FY2008 wk41,,1360
247	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0061,FY2008 wk41,,8404
248	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0067,FY2008 wk41,,5226
249	EPOS	Unable to lookup PRD_ID for value 092/0076	1	0	45,092/0076,FY2008 wk41,,2043
250	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0076,FY2008 wk41,,2043
251	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0080,FY2008 wk41,,2294
252	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0131,FY2008 wk41,,3506
253	EPOS	Unable to lookup STR ID for value 45	1	0	45,092/0143,FY2008 wk41,,1856

4952 4953

CSV File

A **CSV File (Comma Separated Value File)** is a way of moving data between one database and another. Each item of data is separated by a comma.

```
Store number,Article Number,Mathematical Safety Stock,MIN,MinDir,Suggested,MAX,LSQ,Average weekly sales
003,10087738,23,14,38,60,336,,2.8E+01
003,30086605,22,14,37,60,322,,2.6E+01
003,60086604,23,14,38,60,335,,2.7E+01
003,40051993,7,5,9,12,115,,8.5E+00
003,20051994,7,4,9,12,104,,7.9E+00
003,50087755,1,2,3,8,46,,3.3E+00
003,00079041,1,2,3,8,45,,3.2E+00
003,70092435,1,3,10,18,63,,4.4E+00
003,50108060,11,14,67,112,387,,2.7E+01
003,40106085,11,15,67,112,394,,2.8E+01
003,60092657,1,7,19,36,163,,1.3E+01
003,30064552,2,5,14,24,113,,8.8E+00
```

In the example above, the first line contains the descriptions of the items in the rest of the CSV table.

Each following line then contains one record, each item of data in the line being separated from another by a comma.

Note: The data must be precisely entered into the CSV file. For example the first position on every line must contain the Store number, the second the article number, etc. If data gets out of sequence, then there will be errors transferring data from one database to another.

Important: It is important to save the CSV file in the format that is appropriate for the system it will be used on. If you do not save the CSV file in the format appropriate for the system you are working on, errors may result. For example, if you are working on a computer with the Windows operating System, and you want to use the file on that computer, it is important to save the file in the CSV (Windows) format. If however, you are using Windows and want to use the text file on a Macintosh computer, save the file in the CSV (Macintosh) format. If you are using a Macintosh computer and want to use the text file on a system running Windows or Windows NT, save the file in the CSV (Windows) format.

Fixed Width Value File

A **Fixed Width Value File** is a way of moving data between one database and another. Each item of data occupies a specific number of spaces along a line.

CLUSTER_ID	STORE_NAME	STORE_CODE
121	Dunstable	0134
176	Great Yarmouth	2487
180	Manchester	0050
120	Sidcup	1134
345	West Neasdon	0349


In the example above, the first line contains the descriptions of the items in the rest of the Fixed Width table.

Each following line then contains one record, each item of data in the line being a precise number of spaces. Where the actual data is not long enough to occupy the designated length, it must be padded out so that it does, for example with spaces.

Note: The data must be precisely entered into the Fixed Width file. For example the Cluster ID must always be 12 characters long. If the cluster ID is 11 or 13 characters long, there will be errors in transferring the entire sequence of data from one database to another.

Macro Space Management Database

The **Macro Space Management database** consists of a large number of tables.

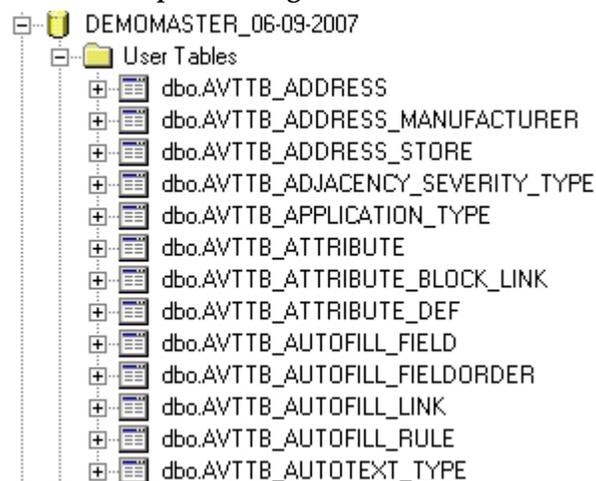

Each of these tables contains many items of data

	FIL_ID	PRO_ID	BLK_ID	PRO_ACADHANDLE	PRO_XPOS	PRO_YPOS	PRO_ZPOS	PRO_XSIZ
1	100	20	7	TEMPP20	540.	-180.	0.	1080.
2	100	22	8	TEMPP22	540.	-390.	130.	1080.
3	100	40	7	TEMPP40	600.	-240.	0.	1200.
4	78	297	268	TEMPP297	0.	-525.	0.	1200.
5	100	89	268	TEMPP89	0.	-675.	0.	1200.
6	100	118	268	TEMPP118	0.	-675.	0.	1200.
7	100	121	268	TEMPP121	0.	-675.	0.	1200.
8	100	139	7	TEMPP139	600.	-250.	0.	1200.
9	100	147	7	TEMPP147	600.	-250.	0.	1200.
10	100	160	7	TEMPP160	600.	-250.	0.	1200.
11	100	205	268	TEMPP205	0.	-750.	130.	1200.
12	100	243	268	TEMPP243	0.	-675.	0.	1200.
13	100	246	268	TEMPP246	0.	-675.	0.	1200.
14	100	277	268	TEMPP277	0.	-675.	0.	1200.

Each line of this table represents one record of an object within Macro Space Management.

Each of the columns within the line contains information on one aspect of that record.

In the first line of this example we can see this record has a File Identification Number (FIL_ID) of 100 and a Product Identification Number (PRO_ID) of 20. Each of the other columns contains yet more information.

Spreadsheet

A **spreadsheet** provides a structured way to move data between one database and another. Each item of data is separated put into a separate cell.

	A	B	C	D	E	F	G	H	I
1	Store number	Article Number	Mathematical Safety Stock	MIN	MinDir	Suggested	MAX	LSQ	Average weekly
2	3	10087738	23	14	38	60	336		2.80E+01
3	3	30086605	22	14	37	60	322		2.60E+01
4	3	60086604	23	14	38	60	335		2.70E+01
5	3	40051993	7	5	9	12	115		8.50E+00
6	3	20051994	7	4	9	12	104		7.90E+00
7	3	50087755	1	2	3	8	46		3.30E+00
8	3	79041	1	2	3	8	45		3.20E+00
9	3	70092435	1	3	10	18	63		4.40E+00
10	3	50108060	11	14	67	112	387		2.70E+01

In the example above, the first line contains the descriptions of the items in the rest of the spreadsheet.

Each following line then contains one record, each item of data being placed in successive cells.

Note: The data must be precisely entered into the spreadsheet. For example the first cell on every line must be contain the Store number, the second the article number, etc.

If data gets out of sequence, then there will be errors transferring data from one database to another.

XML File

A **XML File (Extended Mark-Up Language file)** provides a structured way to move data between one database and another. Each item of data is separated by tags.


```
<?xml version="1.0" encoding="utf-8" ?>
- <Stores>
  - <Store ID="00189" Name="St Albans 123456789">
    <dirName>daniel</dirName>
    <Opened>19950816</Opened>
    <Created>20050425</Created>
    <ddate>20080426</ddate>
    <stt>0</stt>
  - <Addresses>
    - <Address Pcode="LU33JJ">
      <Line1>95 Mendip Way</Line1>
    - <Floors>
      - <Floor Name="Level 1">
        <Type>Ground</Type>
        <bdate>20070425</bdate>
        <ddate>20070426</ddate>
      - <Revisions>
        - <Revision Name="Rev1" Number="1">
          <UPDATE>20000101</UPDATE>
          <Created>19990425</Created>
          <DDate>20007023</DDate>
```

Note: The data must be precisely entered into the XML file. If data gets out of sequence, then there will be errors transferring data from one database to another.

Import Type dialog box

The Import Type GUI


The Import Type GUI lists all Import Types.

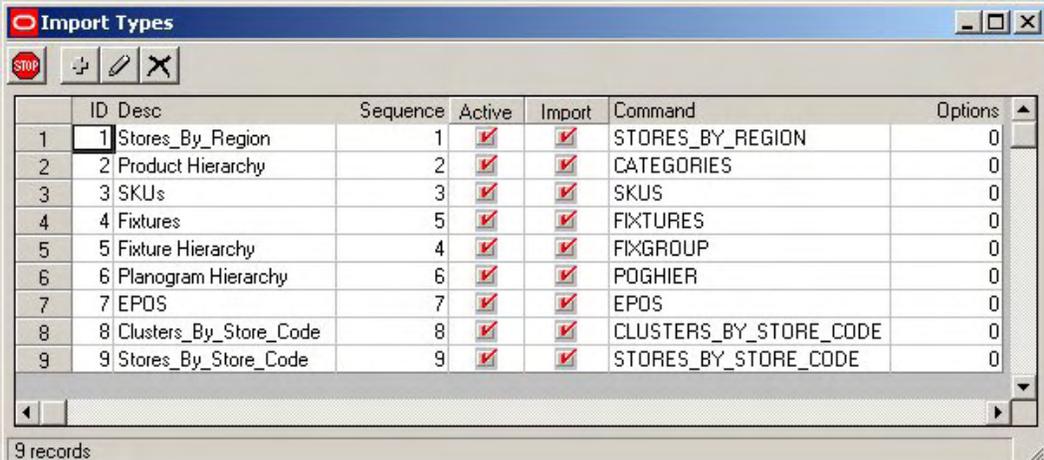

ID	Desc	Sequence	Active	Import	Command	Options
1	Stores_By_Region	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	STORES_BY_REGION	0
2	Product Hierarchy	2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	CATEGORIES	0
3	SKUs	3	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	SKUS	0
4	Fixtures	5	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	FIXTURES	0
5	Fixture Hierarchy	4	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	FIXGROUP	0
6	Planogram Hierarchy	6	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	POGHIER	0
7	EPOS	7	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	EPOS	0
8	Clusters_By_Store_Code	8	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	CLUSTERS_BY_STORE_CODE	0
9	Stores_By_Store_Code	9	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	STORES_BY_STORE_CODE	0

9 records

Import Types can be Added, Edit or Deleted using the appropriate Icons.
Some information for Import Types can be configured via the Add or Edit Options.

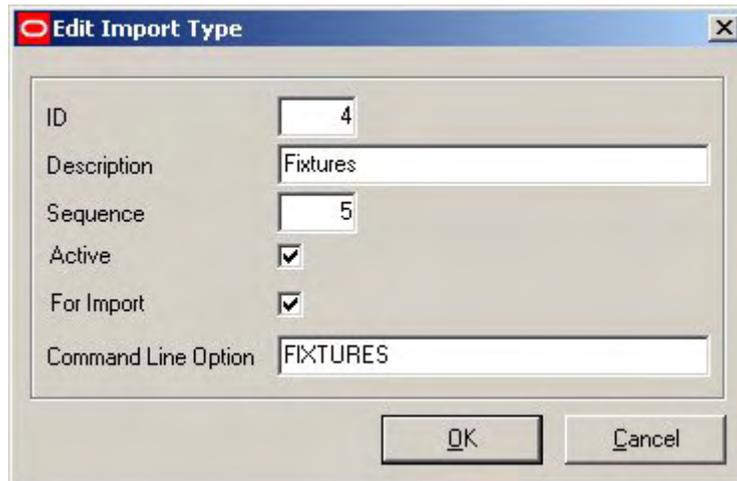

ID is assigned by the software and cannot be user configured.

Description is the name of the Import type.

Sequence determines the order the data import will be carried out.

The Active and For Import check boxes determine whether a Data Import Type is active and will be imported.

The Command Line Option allows users to specify the command line switch that will be used to invoke the Import Type if data Importer is run using the Command Line.

Deleting Import Types

Import Types cannot be deleted until all child import definitions have been deleted.

If child import definitions exist, the Import Type will apparently be deleted from the list of Import Types but will reappear the next time Data Importer is opened.

Import Definitions dialog box

The **Import Definition dialog box** allows users to configure Import Definitions.

Import Definitions

- Business
- Continent
- Country
- Region
- District
- Store
- Address

Description

Description: Business
 Type: Stores
 Source Type: CSV File
 Frequency: 30
 Hierarchy Level: 0

File

File: Clusters.csv
 Start Line: 2
 Delimiter Character: ,
 Quote Character: "
 Decimal Character: .
 Date Format: YYYYMMDD

Database

Database:
 Table/View Name:
 Ignore PK violations
 Reload Lookups
 Delete After Import
 Skip Existing Check
 Archive After Import
 Rename with Date

Import Fields


	Description	Table Name	Group	Field Name	Field Size	Data Type	Lookup	Default	Sequ
1	ID	AVTTB_CLUMP	1	CLU_ID	0	Long			0
2	Type	AVTTB_CLUMP	1	CLT_ID	0	Integer	Cluster Type		3
3	Code	AVTTB_CLUMP	1	CLU_CODE	20	Text	Clusters		1
4	Name	AVTTB_CLUMP	1	CLU_NAME	25	Text			2

Pre SQL Post SQL OK Cancel Help

This allows users to configure how data is extracted from the source file (in this example Fixtures.csv) and inserted into the database.

Import Definitions Frame

The **Import Definitions Frame** contains the list of Import Definitions. (Each Import Definition is configured in the Import Fields Frame).

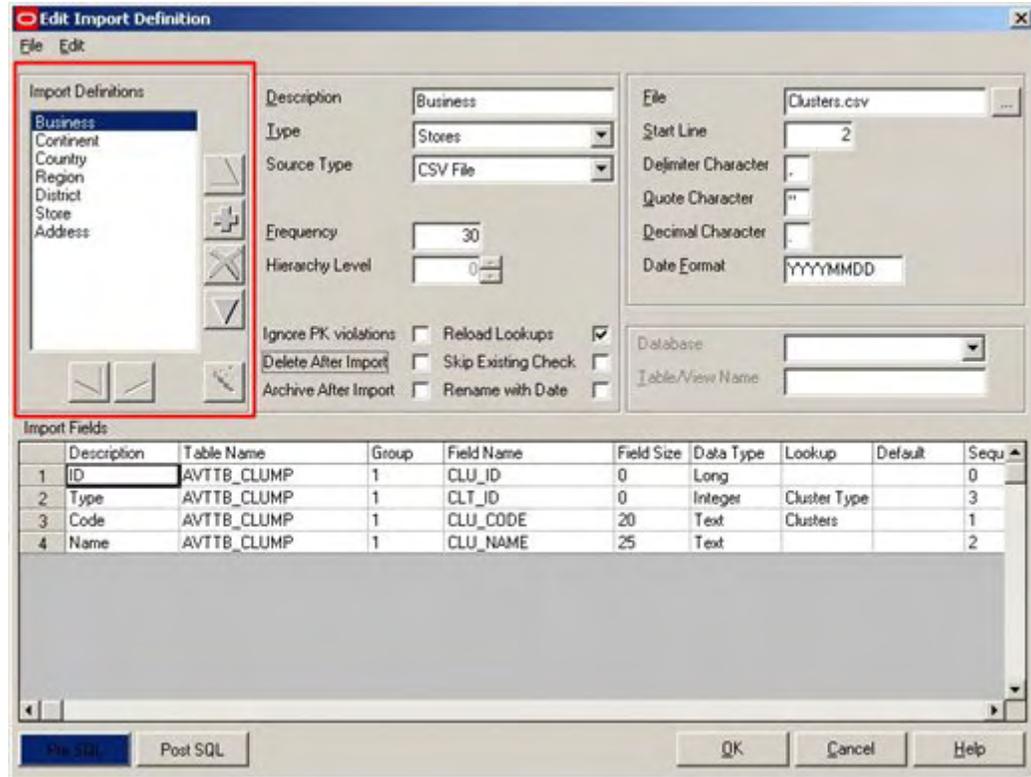

Import Definitions can be Added or Deleted using the appropriate icons.


The Import Definitions will be executed in the order that they are in the list. The up and down arrows allow users to move an individual import definition up or down in the list.

Import Definitions can also be indented using the left and right arrows - this option is for XML files only and will be grayed out unless and XML file is specified in the Source type in the Description Frame.

The Wizard Option is for XML files only and is not currently functional.

Descriptions Frame

The **Descriptions Frame** contains a series of options defining how the import will work.

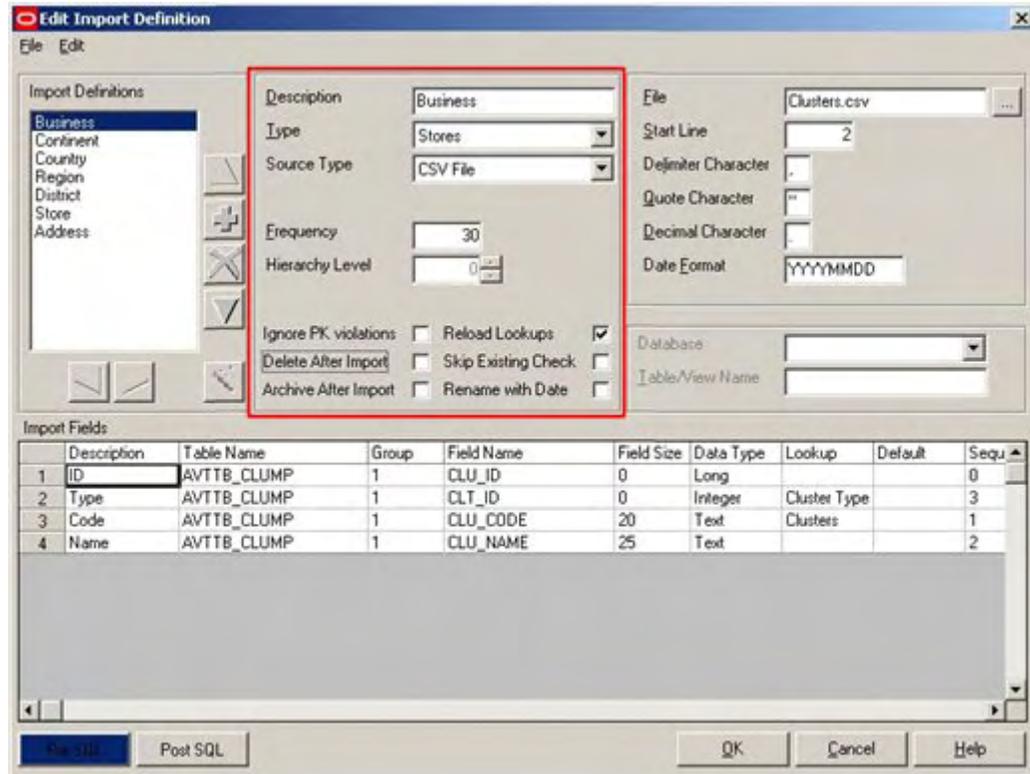

Description

This can be any helpful description of the Import definition currently being configured. The description will also be displayed in the list of Import Definitions to the left of the Definitions frame.

Note: The description for XML files must match the property tag, e.g. <Store> --> "Store"; this is case sensitive and must not include any spaces.

Type

This is the Type of Import Definition - it is selected from a dropdown list containing the Types set up using the Import Types GUI.

Source Type

This is the type of file that will be used to import the data from. It may be one of three types:

- CSV (Comma Separated Value)
- Fixed Width
- XML (eXtended Mark-up Language)

It is selected from a drop down list.

Transaction

This functionality is not yet enabled.

Frequency

This functionality is not yet enabled.

Hierarchy Level

This is used for XML files. (The label and the text box will be disabled for other source types).

The spin button will increase or decrease the level. This can be used as an alternative to the left and right arrow buttons below the definition list). The same rules will apply regarding the values, i.e. no value can be less than 1, and no value can be greater than the preceding definition +1.

A value of 0 will show when the source type is not XML.

If the source type is XML and the level >1, then the file frame will be disabled.

Application

This functionality is not yet enabled.

Ignore PK Violations

Important: Please use this function with caution - it could result in significant errors during data import if incorrectly used.

Checking this option means Data Importer will not raise an error if the Primary Key constraint is violated.

This would typically be used on link tables (e.g. Store Cluster Link) to avoid checking whether a composite key already exists; Data Importer will add the record and ignore the error raised by the database.

Delete After Import

Checking this option means Data Importer will delete the file after it had been imported.

Archive After Import

Checking this option means Data Importer will move the import file to the "*Archived Files*" directory, (as defined in the Configuration Module).

Reload Lookups

This will force Data Importer to clear the relevant look-up cache before items from the file are read.

Skip Existing Check

Important: Please use this function with caution - it could result in significant errors during data import if incorrectly used.

This option is for speed enhancement.

It is intended for when the user knows that the table is empty, so that Data Importer can skip the process of checking whether each record exists in order to determine whether to add or update an existing record.


Rename with Date

If this option is checked, the file being imported will be renamed by appending the date once the import process for that file is complete.

For example Products would be renamed Products 25/12/2005. This is often done in conjunction with the Archive After Import option.

File Frame

The **File Frame** contains information on the file to be used, and how to interpret the information in it.

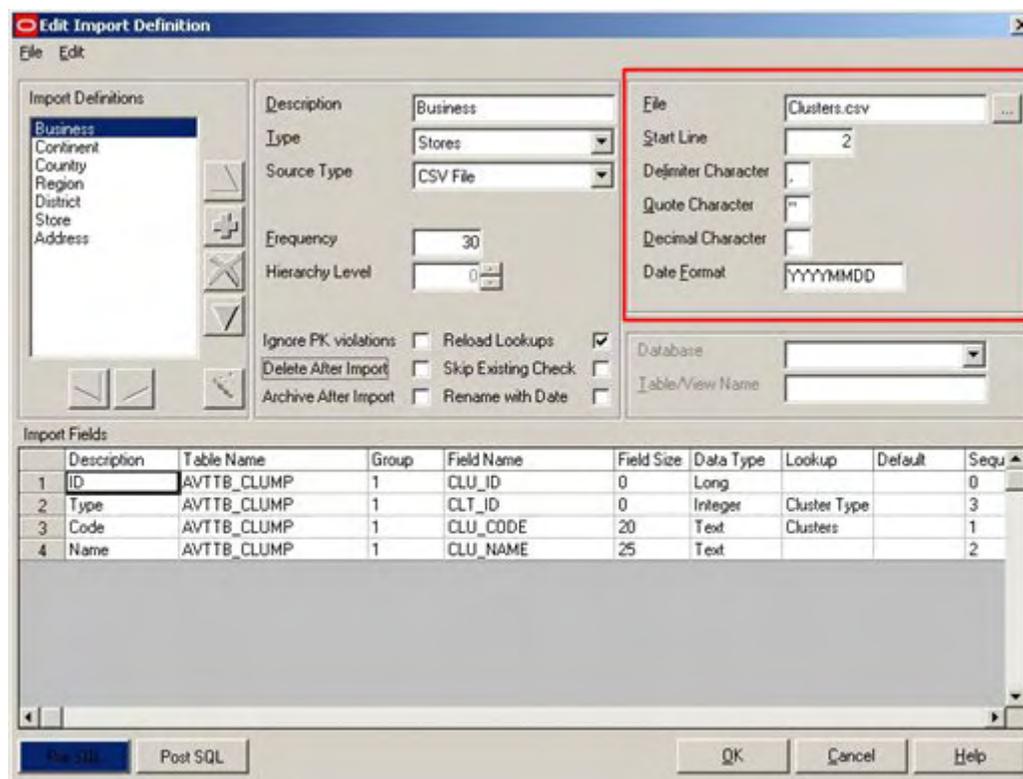

File is the name of the file that will be used for that import definition.

Start Line is the line which Data Import will start reading from in the file.

For example if the first line of a .csv file contains the name of a field and the second the sequence, we would want to start reading data from line 3.

Delimiter Character is the character that separates items of data in a .csv file. (For example, a comma). This option will not be available for XML and Fixed Width files.

Quote Character specified which character in the import file is used to indicate text. The quote characters will be stripped off when the data is imported into the database.


Decimal Character indicates which character is used to denote the decimal point in real numeric values.

For example, the UK might use a period (3.14259) while France might use a comma (3,14159).

Date Format denotes how to interpret dates. These are always assumed to be numeric, but can be separated by delimiters, for example DD/MM/YY or YYYYMMDD.


Import Fields Frame

The **Import Fields Frame** specifies all fields for the Import Definition highlighted in the Import Definitions Frame.

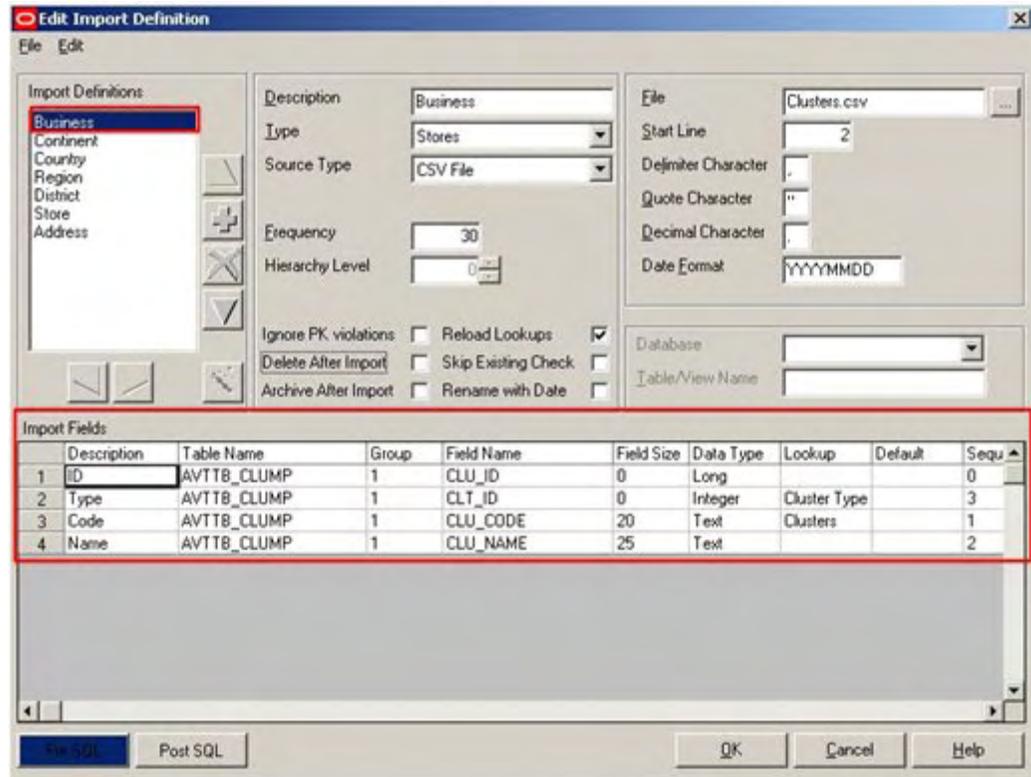

Pre and Post SQL Options

The Pre and Post SQL options allow the user to add SQL statements to an import definition.

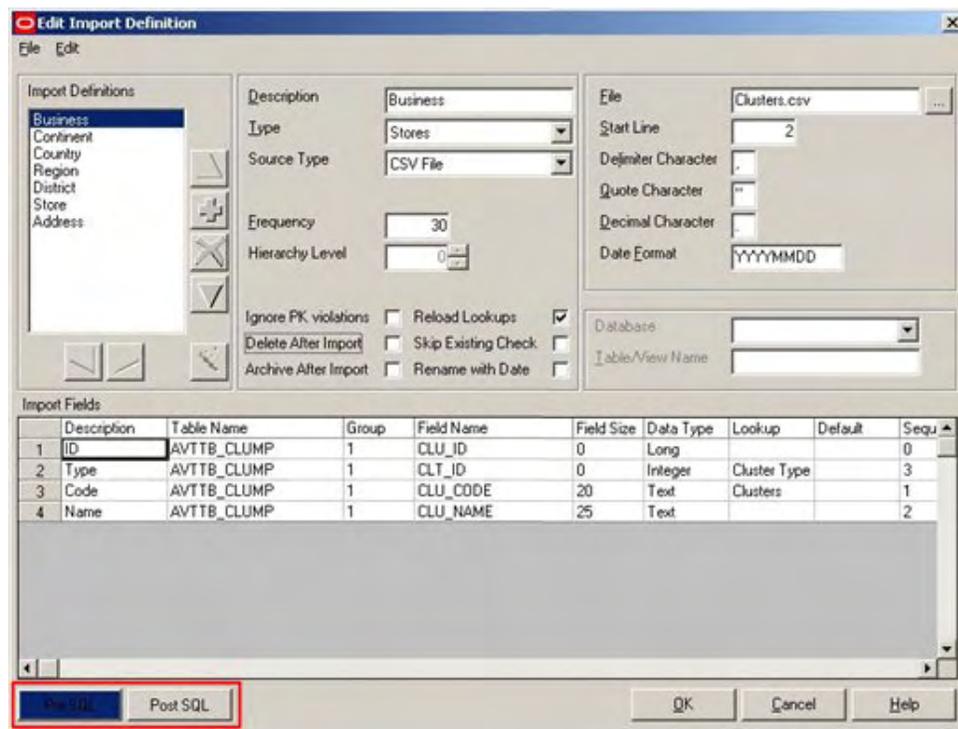

If either the Pre SQL or Post SQL options contains SQL to be executed, it will be shown colored blue.

Pre SQL will be executed before the definition is run/imported, and Post SQL will be executed after the definition is run/imported.


An example of Pre SQL might be:

```
UPDATE AVTTB_NEXTID SET NID_NEXTID = (SELECT COALESCE(MAX(CLU_ID),0) + 1 FROM AVTTB_CLUMP) WHERE NID_TABLENAME='AVTTB_CLUMP'
```


This ensures that the AVTTB_NEXTID table is updated with the correct value to use when adding a new record to the database.

Lookups dialog box

The Look-up dialogue box lists all defined lookups.

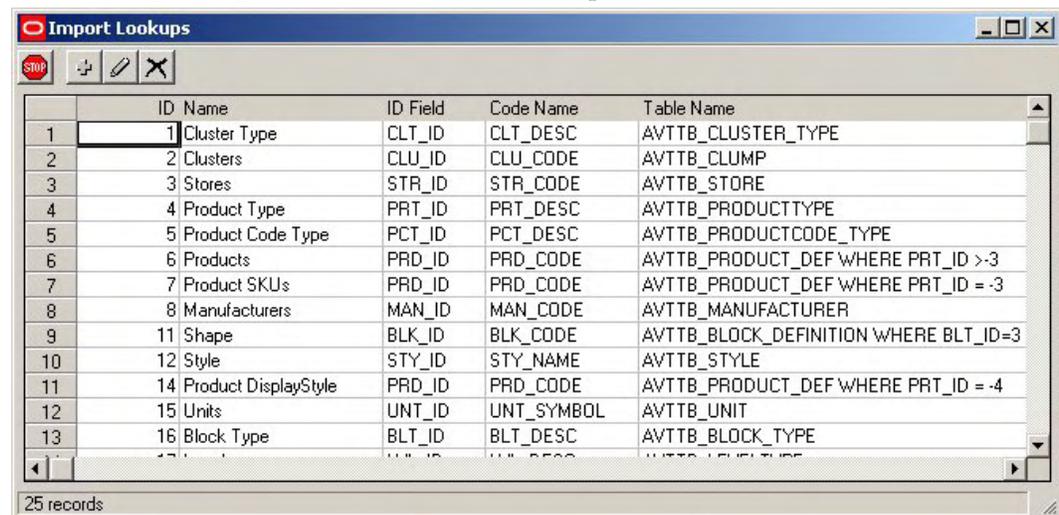

Lookups can be Added, Edit or Deleted using the appropriate Icons.

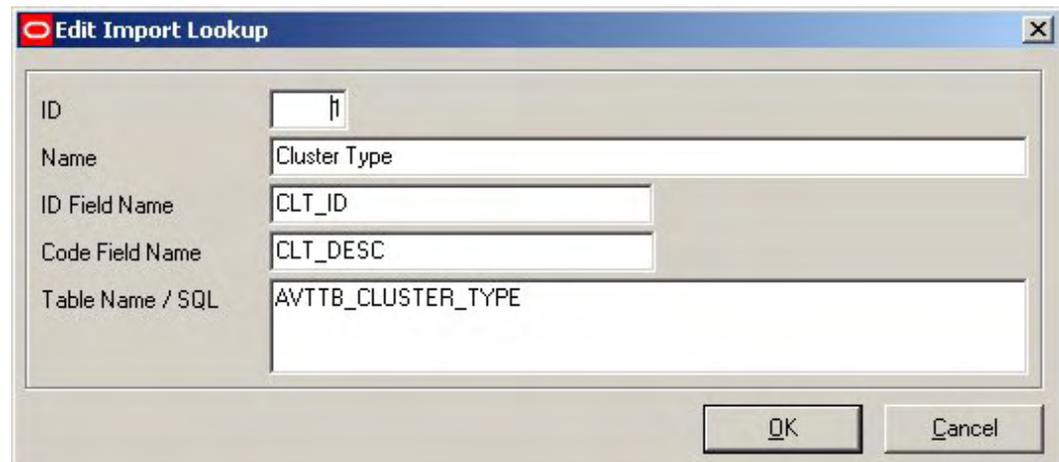

ID is assigned by the software and cannot be user configured.

Name is the Name Assigned to the Lookup.

ID Field Name is the name of the field in the Macro Space Management database field table that will return the lookup value.

Code Field Name is the name of the field that will be used for the lookup.


Table Name / SQL is the name of the table the lookup will be executed in.

The SQL is optional, but may be used to limit the options within the table that can be used to return a lookup value.

For example, a SQL statement might restrict the cluster types that can be imported.

Import Field dialog box

The **Import Field** dialog box is accessible from the Import Definitions dialog box.

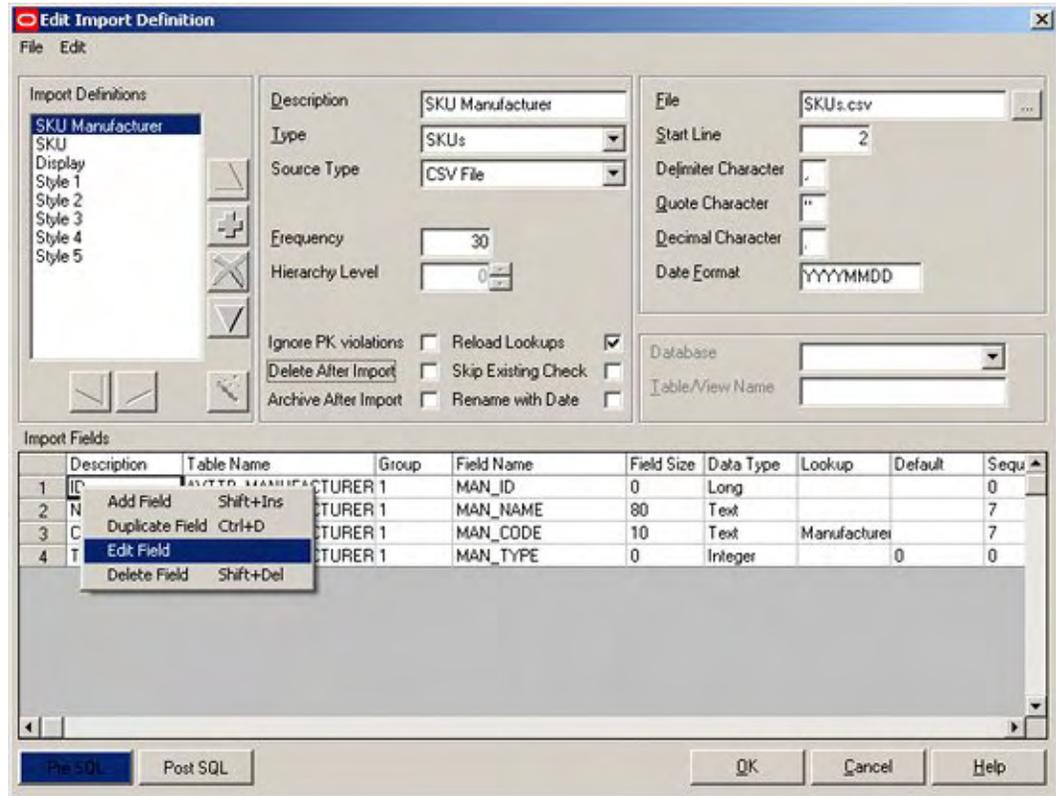

Right clicking in the Import Fields frame will bring up a pop-up menu. This can be used to bring up the Import Field dialog box.

The 'Import Field' dialog box is shown with the following configuration:

- Sample Line:** Product Hierarchy Code,SKU Code,UPC/GTIN,PCT_ID,Name,Description,Supplier/Manufacturer,Effective Date,Brand,Display
- Description:** ID
- Table Name:** AVTTB_MANUFACTURER
- Field Name:** MAN_ID
- Data Type:** Long
- Field Size:** 0
- Group:** 1
- Value:**
 - Import Value
 - Parent: SKU Manufacturer
 - Source Name: [Empty]
 - Sequence: <None>
 - Source Position: 0
 - Source Size: 0
 - Sample Value: [Empty]
- Actions:**
 - Add
 - Update
 - Delete
 - Warn if Truncating
 - Error if Truncating
 - Add to Lookup Cache
 - Used to check if it Exists
 - Skip record if field is empty
 - Skip record if field is zero
- Modifiers:**
 - Trim:
 - Abbreviate:
 - Uppercase:
 - Lowercase:
 - Prefix: [Empty]
 - Suffix: [Empty]

Sample Line and Sample Value

The **Sample Line** and **Sample Value** show a sample of the data that is to be imported and the specific value referenced by the definition being configured.


The 'Import Field' dialog box is shown with the following configuration, with a red box highlighting the 'Sample Value' field:

- Sample Line:** Product Hierarchy Code,SKU Code,UPC/GTIN,PCT_ID,Name,Description,Supplier/Manufacturer,Effective Date,Brand,Display
- Description:** Name
- Table Name:** AVTTB_MANUFACTURER
- Field Name:** MAN_NAME
- Data Type:** String
- Field Size:** 80
- Group:** 1
- Value:**
 - Import Value
 - Parent: SKU Manufacturer
 - Source Name: [Empty]
 - Sequence: 7
 - Source Position: 0
 - Source Size: 0
 - Sample Value: Supplier/Manufacturer
- Actions:**
 - Add
 - Update
 - Delete
 - Warn if Truncating
 - Error if Truncating
 - Add to Lookup Cache
 - Used to check if it Exists
 - Skip record if field is empty
 - Skip record if field is zero
- Modifiers:**
 - Trim:
 - Abbreviate:
 - Uppercase:
 - Lowercase:
 - Prefix: [Empty]
 - Suffix: [Empty]

- Sample Line shows a full line of data. (The line selected is determined by the designated Start Line in the Import Design GUI.)
- Sample Value shows that value defined in the Value frame by the selected option.

Description Frame

The **Description Frame** enables users to specify information pertinent to the table that the data is to be imported into.

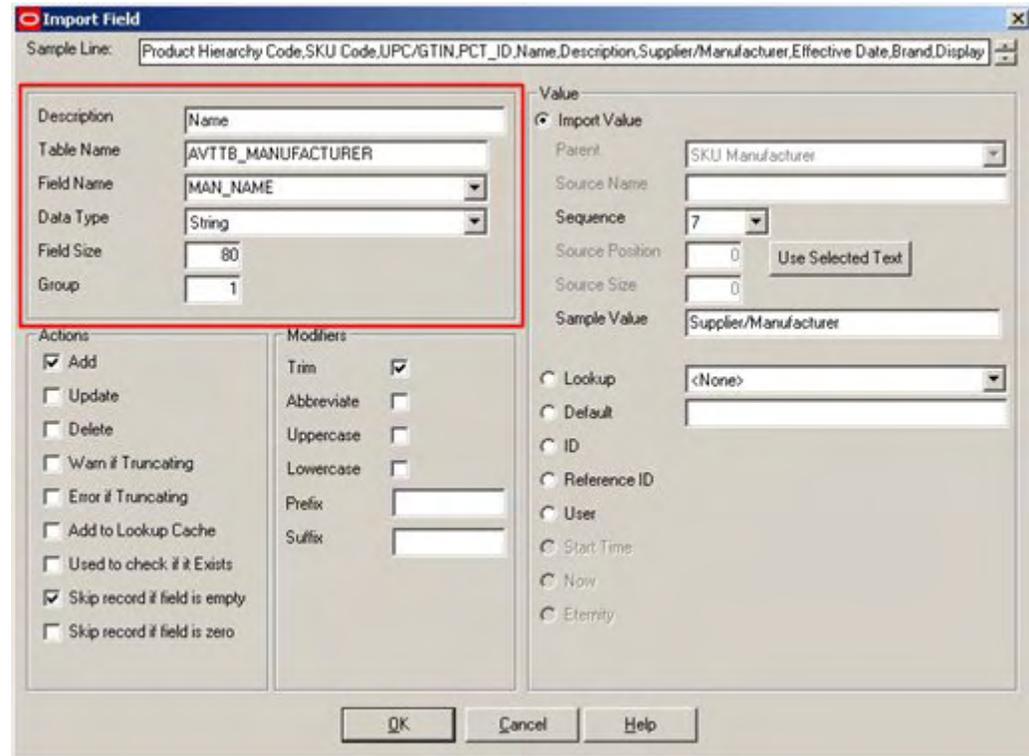

Description is a user input name that is used to describe the item of data being imported. In this example, Block Name indicates that the user is bringing a block name into the database.

Table Name is the name of the table in the database into which the item of data must be written. In this example, the AVTTB_MANUFACTURER table name has been added.

Field Name is the name of the specific field within the table that the item of data is to be written to. Once the table name has been added, the field name can be selected from a drop down list.

Data Type and **Field Size** will be populated automatically after the Field Name has been selected.

Group indicates which table the data is to be added to.

Each Import Definition is made up of a number of import fields. If these import fields are to be used to put data into two or more tables, then the group number must be used to indicate which table the data is to be imported to.

For example, the Fixture Import type has a number of Import Definitions. The Block Definition Import Definition writes information to the AVTTB_BLOCK_DEFINITION and the AVTTB_BLOCK_GROUP_LINK tables. The AVTTB_BLOCK_DEFINITION TABLE has been defined as Group 1 and the AVTTB_BLOCK_GROUP_LINK table as Group 2.

Note: Data Importer works by producing a series of SQL Update statements for the data to be imported. Assigning each table to a unique group means that when Data Importer produces the Update statements, it assigns the right information to the statement for that table. If you do not assign tables to groups during configuring the import field, Data Importer will try and produce a single SQL statement that writes data to multiple tables.

Actions Frame

The **Actions Frame** enables users to specify how to manipulate the data being imported.

Add indicates that the data is to be added.

Update indicates that the data is to be updated.

Delete indicates that existing data is to be deleted out of the specified table.

Warn if Truncating is only enabled for String data types. If selected, it adds a note to the Import Error Log that the imported value exceeded the field size.

If this option is selected the data will still be imported.

Error if Truncating is only enabled for String data types. If selected, it adds a note to the Import Error Log that the imported value exceeded the field size and does not import the data.

Left Justify is not enabled in this release.

Add to Lookup Cache adds the result of the lookup so that when a new record is added during that specific import, it is first checked against the Lookup cache. This improves performance as it means that not all imported data needs to be checked against the database.

Used to Check if it Exists indicates that this field will be used to check if the record currently exists in the database. (This option is often used in conjunction with the lookup option in the Value frame).


If the record exists, and the Update option is not enabled, the record will be skipped.

Skip Record if Field is Empty will result in this record being skipped during import if the field has been left empty.

Skip Record if Field is Zero will result in this record being skipped if a numeric field is zero. (An example might be if a product dimension is zero).

Modifiers Frame

The **Modifiers Frame** is used to modify the data being imported.

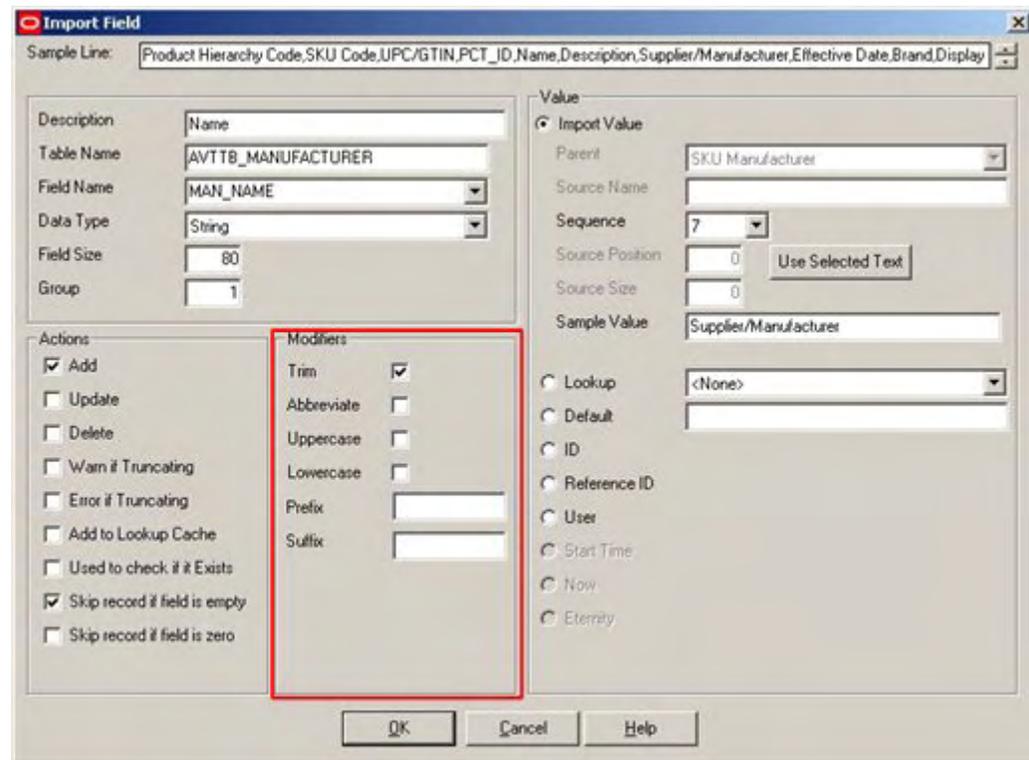

Trim will remove leading and trailing spaces.

Abbreviate will truncate text strings if they exceed the maximum size of that field in the database.

Uppercase will ensure that the imported data is all converted to uppercase.

Lowercase will ensure that the imported data is all converted to lowercase.

Prefix will add the specified prefix to the imported value if the data being imported is a text string.

Suffix will add the specified suffix to the imported value if the data being imported is a text string.

Value Frame

The **Value Frame** enables the user to select the specific data to be imported.

Import Value Radio Button - when selected, this indicated that the data will be imported (as opposed to allocated in the form of an ID, etc).

When importing a value, it is possible to include either a default value, and/or a lookup along with the item of data being imported.

Parent is the name of the file from which the data will be imported. It must be located in the Macro Space Management Import Directory.

Source Name is only enabled when importing from an XML file. The dropdown list will display all properties and attributes for the definition (hierarchy level), excluding properties which represent child objects.

Note that if a parent is defined, then the properties/attributes should relate to the parent

Sequence is only enabled when importing from CSV files and defines which item in the list will be imported.

Source Position and **Source Size** are only enabled when importing from Fixed Width Files and define the starting character position and width of the field.

Use Selected Text is only enabled when importing from Fixed Width Files and allows the user to select part of the text in the sample line in order to define both the Source Position and Source Size.

Sample Value is an example of the data that will be imported.

Lookup will use the import value and convert it to an ID.

For example, the imported value might represent the Product Code, but then convert this to the Product ID, which is often done to check whether the record exists.

Note: Lookup works in two different ways, depending on whether Used to Check if Exists has been selected in the Action Frame. If Used to Check if Exists has not been selected, the lookup will convert the value being imported from one value to another. The value will then be imported in the converted form. If Used to Check if Exists has been selected, the lookup will convert the value being imported from one value to another, and use that value to check if the data being imported currently exists in the database. The data will still be imported in the original form.

Default will use the specified default value, instead of reading the Import Value.

ID is used when the application has to determine the next ID.

Reference ID is used when multiple groups are defined, and is used in the subordinate records to refer to the new ID that was used in the main record.

Note: This is a frequent source of error in defining imports. If BLK_ID has been imported earlier during the Import into the AVTTB_BLOCK_DEFINITIONS table, and it is to be added again to the AVTTB_BLOCK_GROUP_LINK table, then it should be added as a Reference ID and not as an ID. Attempting to add it again as an ID will cause Data Importer to error with the message "Duplicate Primary Key".

User sets the field value to the current system user for the Modified_By, or Created_By fields.


Start Time sets a date field value to the date and time of when this particular import process was started. Unlike the *Now* option, this ensures that all records have the same date time stamp.

Now sets the date field value to the current date and time for the instant the item of data was imported.


Eternity sets a date field value to the indefinite future , i.e. 31st December 2999.

Import Log

The **Import Log** is activated from the View pull down menu.

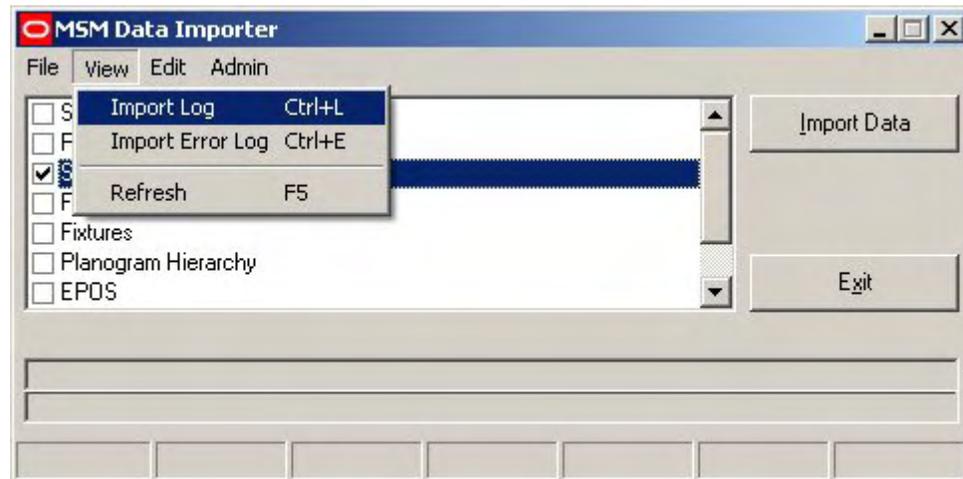

This will bring up the Import Log.

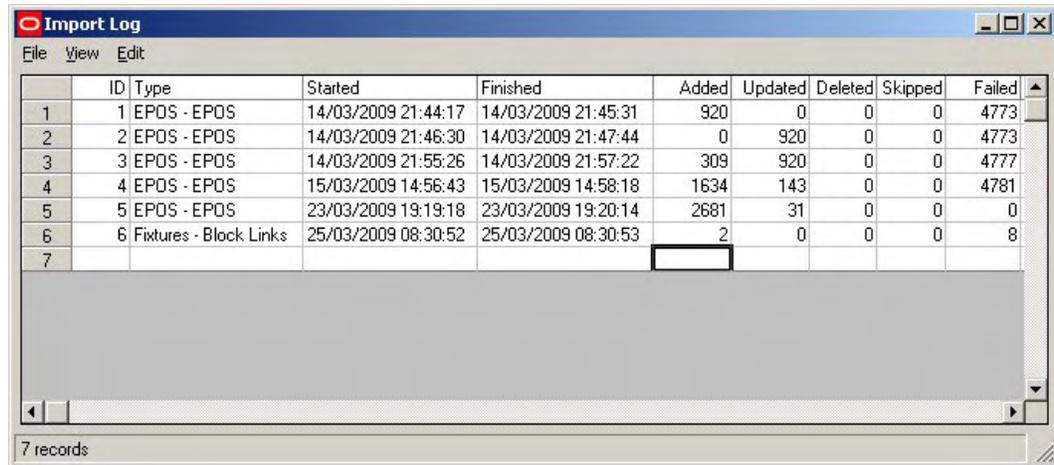

ID	Type	Started	Finished	Added	Updated	Deleted	Skipped	Failed
1	EPOS - EPOS	14/03/2009 21:44:17	14/03/2009 21:45:31	920	0	0	0	4773
2	EPOS - EPOS	14/03/2009 21:46:30	14/03/2009 21:47:44	0	920	0	0	4773
3	EPOS - EPOS	14/03/2009 21:55:26	14/03/2009 21:57:22	309	920	0	0	4777
4	EPOS - EPOS	15/03/2009 14:56:43	15/03/2009 14:58:18	1634	143	0	0	4781
5	EPOS - EPOS	23/03/2009 19:19:18	23/03/2009 19:20:14	2681	31	0	0	0
6	Fixtures - Block Links	25/03/2009 08:30:52	25/03/2009 08:30:53	2	0	0	0	8
7								


7 records

The Import Log contains information on recent imports.

In addition it can be used to access the Import Error Log for specific imports. (View Menu).

The Import Log

The **Import Log** contains information on Recent Imports.

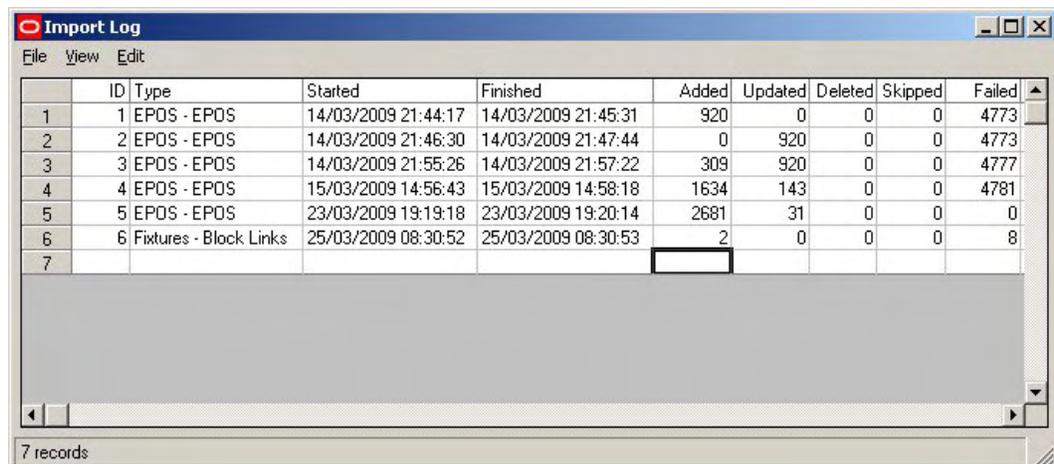

ID	Type	Started	Finished	Added	Updated	Deleted	Skipped	Failed
1	EPOS - EPOS	14/03/2009 21:44:17	14/03/2009 21:45:31	920	0	0	0	4773
2	EPOS - EPOS	14/03/2009 21:46:30	14/03/2009 21:47:44	0	920	0	0	4773
3	EPOS - EPOS	14/03/2009 21:55:26	14/03/2009 21:57:22	309	920	0	0	4777
4	EPOS - EPOS	15/03/2009 14:56:43	15/03/2009 14:58:18	1634	143	0	0	4781
5	EPOS - EPOS	23/03/2009 19:19:18	23/03/2009 19:20:14	2681	31	0	0	0
6	Fixtures - Block Links	25/03/2009 08:30:52	25/03/2009 08:30:53	2	0	0	0	8
7								

7 records

ID is assigned by the software and is not user customizable.

Type is the name of the import type, followed by the specific import definition.

Fixtures - Fixture Information is thus the Fixture Information import definition in the Fixtures import type.

Started and **Finished** are when the import started and finished.

Added is the number of records added.

Updated is the number of records updated.

Deleted is the number of records deleted.

Skipped is the number of records omitted. (This will occur when the Skip Record if Field is Empty or Skip Record if Field is Zero options are used when importing data)

User and **Machine** indicate which user carried out the import and which computer was used.

Number of Records Imported


The **number of records imported** is calculated as follows for each import definition within an import type:

- The number of items of data to be input is calculated.
- This is multiplied by the number of tables the data is to be inserted into.

If there are 20 items of data to be imported for a particular definition, and the definition references 3 tables, the number of records imported will show as 60 (20 x 3).


Import Log Options

Several options are available from the Menus in the Import Log.

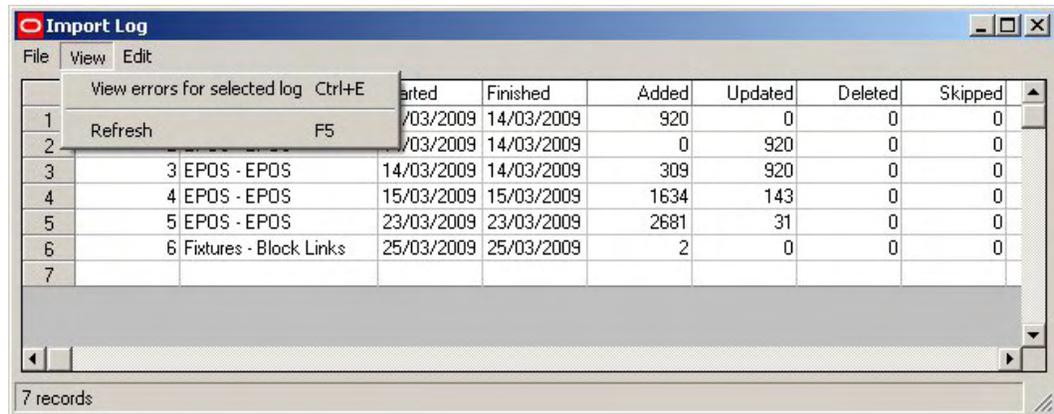

The **View menu** allows two options:

- View errors for selected log allows users to view the errors for a selected import definition. (This is often a better option than viewing the Error Log directly, as it allows users to see specific errors, rather than all errors for all imports).
- Refresh refreshes the current view.

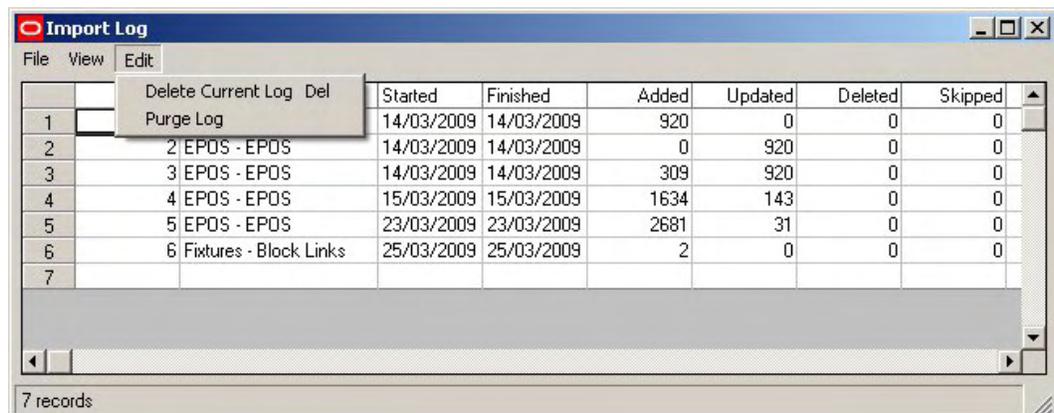

The **Edit menu** allows two options:

- Delete Current Log deletes the highlighted Import log.
- Purge Log deletes all import logs.

Import Error Log

The **Import Error Log** contains details of all the errors that have occurred during data imports.

It can be called directly from the main data importer dialogue box View menu, in which case it will show all errors in the import log. Alternatively, the Import Error Log may be called via the Import Log, allowing specific errors to be viewed.

ID	Type	Message	Severity	Error	Input
236	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0039,FY2008 wk41,,9175
237	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0042,FY2008 wk41,,8145
238	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0044,FY2008 wk41,,6337
239	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0045,FY2008 wk41,,3074
240	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0046,FY2008 wk41,,2653
241	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0047,FY2008 wk41,,1051
242	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0053,FY2008 wk41,,4773
243	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0055,FY2008 wk41,,1360
244	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0057,FY2008 wk41,,6441
245	EPOS	Unable to lookup PRD_ID for value 092/0059	1	0	45,092/0059,FY2008 wk41,,1365
246	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0059,FY2008 wk41,,1365
247	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0061,FY2008 wk41,,8404
248	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0067,FY2008 wk41,,5226
249	EPOS	Unable to lookup PRD_ID for value 092/0076	1	0	45,092/0076,FY2008 wk41,,2043
250	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0076,FY2008 wk41,,2043
251	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0080,FY2008 wk41,,2294
252	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0131,FY2008 wk41,,3506
253	EPOS	Unable to lookup STR_ID for value 45	1	0	45,092/0143,FY2008 wk41,,1856

ID is assigned by the software and is not user customizable.

Type is the Import Definition Type

Message is a description of the error.

Severity is the severity of the error. 1 is an error, 2 is a warning.

The Import can set to warn only if (for example in an import definition) Data Importer is configured to truncate a text string being imported.


Error is the code number of the error that has occurred.

Input is the data being used by Data Importer.

Output is the SQL statement that Data Importer is attempting to compose.


Import Error Log Options

Several **options** are available from the Menus in the Import Error Log.

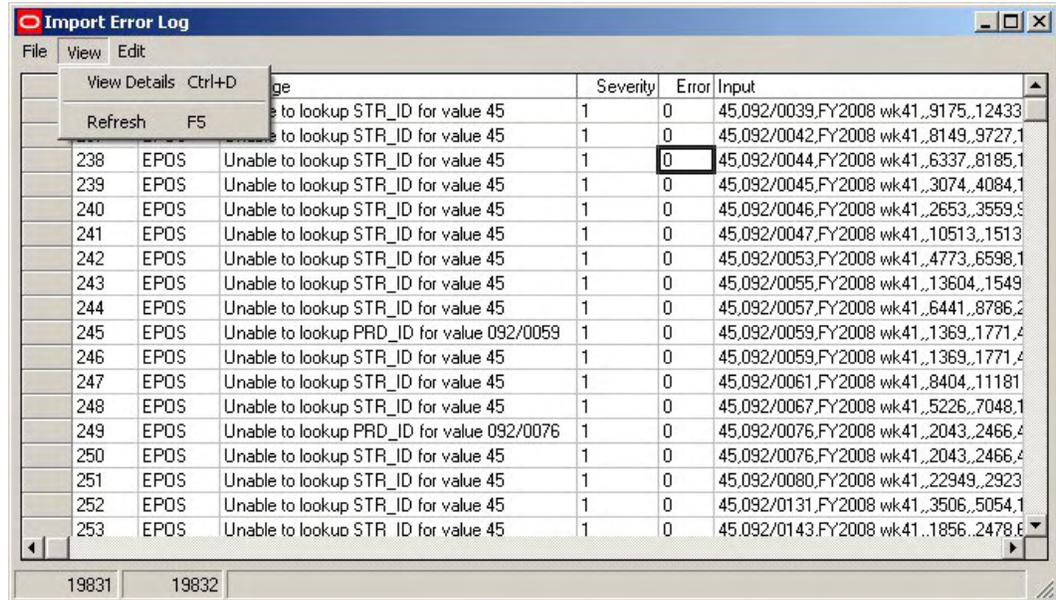

The **View** menu allows two options:

- View Details allows user to view a detailed report for a selected error.
- Refresh refreshes the current view.

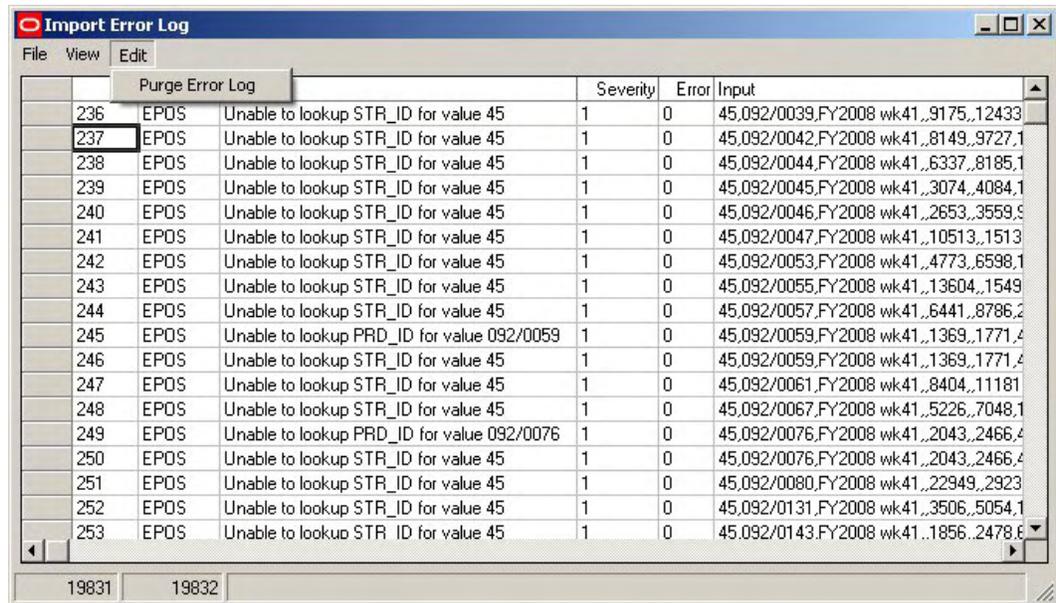

The **Edit** menu allows users to delete the highlighted error log.

Import Error Details

To see the error in more detail, it is possible to do so by selecting the View Details option from the View pull down menu.

	Severity	Error	Input
238	EPOS	Unable to lookup STR_ID for value 45	45,092/0039,FY2008 wk41,,9175,,12433
239	EPOS	Unable to lookup STR_ID for value 45	45,092/0042,FY2008 wk41,,8149,,9727,1
240	EPOS	Unable to lookup STR_ID for value 45	45,092/0044,FY2008 wk41,,6337,,8185,1
241	EPOS	Unable to lookup STR_ID for value 45	45,092/0045,FY2008 wk41,,3074,,4084,1
242	EPOS	Unable to lookup STR_ID for value 45	45,092/0046,FY2008 wk41,,2653,,3559,9
243	EPOS	Unable to lookup STR_ID for value 45	45,092/0047,FY2008 wk41,,10513,,1513
244	EPOS	Unable to lookup STR_ID for value 45	45,092/0053,FY2008 wk41,,4773,,6598,1
245	EPOS	Unable to lookup STR_ID for value 45	45,092/0055,FY2008 wk41,,13604,,1549
246	EPOS	Unable to lookup PRD_ID for value 092/0059	45,092/0059,FY2008 wk41,,1369,,1771,4
247	EPOS	Unable to lookup STR_ID for value 45	45,092/0059,FY2008 wk41,,1369,,1771,4
248	EPOS	Unable to lookup STR_ID for value 45	45,092/0061,FY2008 wk41,,8404,,11181
249	EPOS	Unable to lookup PRD_ID for value 092/0076	45,092/0067,FY2008 wk41,,5226,,7048,1
250	EPOS	Unable to lookup STR_ID for value 45	45,092/0076,FY2008 wk41,,2043,,2466,4
251	EPOS	Unable to lookup STR_ID for value 45	45,092/0076,FY2008 wk41,,2043,,2466,4
252	EPOS	Unable to lookup STR_ID for value 45	45,092/0080,FY2008 wk41,,22949,,2923
253	EPOS	Unable to lookup STR_ID for value 45	45,092/0131,FY2008 wk41,,3506,,5054,1
			45,092/0143,FY2008 wk41,,1856,,2478,6

This will bring up the Error Details dialogue box, which allows the error to be seen more clearly.

Error Details

Description: EPOS

Error Number: 0

Error Message: Unable to lookup STR_ID for value 45

Input Data: 45,092/0044,FY2008 wk41,,6337,,8185,1848,,9698

Output Data:

OK

This is useful if the data is extensive and difficult to see in its entirety in the Import Error Log.

Preparing to Configure Data Importer

Note: The examples given in this section of the Help file are based on data imports set up for Macro Space Management v5.4.015. If applied to other builds (or to a schema modified by an upgrade script) the precise example may no longer work.

Important Note: import of data using Data Importer. It is recommended that the user back up the database before import. Should there be errors during the import, this will enable the user to restore the database to its condition before the import. There should not be errors resulting from a well configured up Data Import - but as backing up a database is quick to carry out, it is a prudent precaution to take.

Overview of Preparations

Before starting to configure Data Importer the following must true:

1. The user must be able to access the central Macro Space Management database.
2. The user must have software capable of reading the central Macro Space Management database.
3. The user should be familiar with the schema for the database.

For configuring a specific import:

1. The user should list all the tables that will require data to be inserted
2. For each affected table the user should list all fields that will require data inserted
3. For all data to be imported the user should identify if a look up is required.

Note: All non-nullable fields in a table must have a value inserted. This may be done in one of two ways:

- a. Directly inserted from Data Importer
- b. Added as a default from the database.

(Adding as a default from the database is only possible if that column has had a default value defined).

Accessing and Viewing the Central Macro Space Management Database

The central **Macro Space Management database** will be located on a specific server (or servers) within the customers network.

The user will need to examine data in the database during the configuration of an Import Definition. They must accordingly have access rights to those servers.

The user must also have appropriate software installed on their computer allowing them to view the contents of the database. Suitable software includes:

- Microsoft SQL Server Management Studio
- Microsoft Enterprise Manager and/or Query Analyser
- Toad

In the example below, some of the tables in the database are listed in the left hand pane, while the contents of the tables are listed in the right hand one.

The screenshot shows the TOAD for SQL Server interface. The left pane displays a list of tables in the database, including AVTTB_COMMAND_GROUP_LINK, AVTTB_COMMAND_LOG, AVTTB_COMMAND_USER_GROU..., AVTTB_CONNECTION_SHAPE, AVTTB_CONTROLTYPE, AVTTB_CUSTOM_SQL, AVTTB_CUSTOM_SQL_FILTER, AVTTB_CUSTOM_SQL_TYPE, AVTTB_CUSTOM_VIEW, AVTTB_DATATYPE, AVTTB_DBKEY, AVTTB_DICTIONARY, AVTTB_DIMENSION, AVTTB_DIRECTORY, and AVTTB_DIRECTORY_USER. The right pane shows the data for the selected table, AVTTB_COMMAND_USER_GROU..., with columns USG_ID, CMG_ID, and CGL_PERMISSION_MASK. The data is as follows:

USG_ID	CMG_ID	CGL_PERMISSION_MASK
1	4	15
1	58	15
1	2	0
1	5	0
1	7	0
1	1	0
1	6	0
1	20	15
1	65	15
1	55	15
1	21	0
1	10	15
1	16	15
1	66	15
1	68	15

Planning the Import

It is recommended the following sequence of actions is carried when an import is configured and executed:

- The information available for import is documented. (This can be in spreadsheet or table form)
- The Schema is consulted to find all tables related to the intended import.
- The fields in the table(s) are listed and the fields that want populating identified.
- The Import Type is given a name.
- The Import Type is broken down into Import Definitions.
- Each Import definition is broken down into Import fields.
- Any Lookups required are identified.
- A spreadsheet template should be produced for entering the data to be input.
- A copy of the populated spreadsheet containing just the first few lines of data is put in the Macro Space Management import directory.
- Date Importer is configured.
- Data Importer is tested using the initial few lines of data.
- The full import is carried out.

The AVTTB_NEXTID Table

The AVTTB_NEXT_ID Table contains the values to be assigned for the next instance of every primary key in the Macro Space Management database.

Columns	Data	Indexes	Relationships	Constraints	Triggers	Partitions	Grants	Uses	Used By	Extended Properties																																																												
<div style="border: 1px solid #ccc; padding: 5px;"> <div style="background-color: #f0f0f0; padding: 2px;"> Y </div> <div style="background-color: #e0e0e0; padding: 2px; font-weight: bold;"> Drag a column header here to group by that column </div> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>NID_TABLENAME</th> <th>NID_NEXTID</th> <th>NID_COLUMNNA...</th> <th>NID_D...</th> <th>NID_LOCKED_BY</th> <th>NID_LOCKED</th> </tr> </thead> <tbody> <tr> <td>AVTTB_AUTOFILL_RULE</td> <td>1</td> <td>AFR_ID</td> <td>{null}</td> <td>{null}</td> <td>{null}</td> </tr> <tr> <td>AVTTB_AUTOTEXT_TYPE</td> <td>8</td> <td>ATT_ID</td> <td>{null}</td> <td>{null}</td> <td>{null}</td> </tr> <tr> <td>AVTTB_BLOCK_DEFINITION</td> <td>124</td> <td>BLK_ID</td> <td>{null}</td> <td>{null}</td> <td>{null}</td> </tr> <tr> <td>AVTTB_BLOCK_GROUP</td> <td>99</td> <td>BLG_ID</td> <td>{null}</td> <td>{null}</td> <td>{null}</td> </tr> <tr> <td>AVTTB_BLOCK_INSERTION</td> <td>42</td> <td>BLI_ID</td> <td>{null}</td> <td>{null}</td> <td>{null}</td> </tr> <tr> <td>AVTTB_BLOCK_SHAPE</td> <td>4</td> <td>BLS_ID</td> <td>{null}</td> <td>{null}</td> <td>{null}</td> </tr> <tr> <td>AVTTB_BLOCK_TYPE</td> <td>9</td> <td>BLT_ID</td> <td>{null}</td> <td>{null}</td> <td>{null}</td> </tr> <tr> <td>AVTTB_CALENDAR</td> <td>1</td> <td>CAL_ID</td> <td>Calenders</td> <td>{null}</td> <td>{null}</td> </tr> <tr> <td>AVTTB_CALENDAR_TYPE</td> <td>7</td> <td>CAT_ID</td> <td>{null}</td> <td>{null}</td> <td>{null}</td> </tr> </tbody> </table> </div>											NID_TABLENAME	NID_NEXTID	NID_COLUMNNA...	NID_D...	NID_LOCKED_BY	NID_LOCKED	AVTTB_AUTOFILL_RULE	1	AFR_ID	{null}	{null}	{null}	AVTTB_AUTOTEXT_TYPE	8	ATT_ID	{null}	{null}	{null}	AVTTB_BLOCK_DEFINITION	124	BLK_ID	{null}	{null}	{null}	AVTTB_BLOCK_GROUP	99	BLG_ID	{null}	{null}	{null}	AVTTB_BLOCK_INSERTION	42	BLI_ID	{null}	{null}	{null}	AVTTB_BLOCK_SHAPE	4	BLS_ID	{null}	{null}	{null}	AVTTB_BLOCK_TYPE	9	BLT_ID	{null}	{null}	{null}	AVTTB_CALENDAR	1	CAL_ID	Calenders	{null}	{null}	AVTTB_CALENDAR_TYPE	7	CAT_ID	{null}	{null}	{null}
NID_TABLENAME	NID_NEXTID	NID_COLUMNNA...	NID_D...	NID_LOCKED_BY	NID_LOCKED																																																																	
AVTTB_AUTOFILL_RULE	1	AFR_ID	{null}	{null}	{null}																																																																	
AVTTB_AUTOTEXT_TYPE	8	ATT_ID	{null}	{null}	{null}																																																																	
AVTTB_BLOCK_DEFINITION	124	BLK_ID	{null}	{null}	{null}																																																																	
AVTTB_BLOCK_GROUP	99	BLG_ID	{null}	{null}	{null}																																																																	
AVTTB_BLOCK_INSERTION	42	BLI_ID	{null}	{null}	{null}																																																																	
AVTTB_BLOCK_SHAPE	4	BLS_ID	{null}	{null}	{null}																																																																	
AVTTB_BLOCK_TYPE	9	BLT_ID	{null}	{null}	{null}																																																																	
AVTTB_CALENDAR	1	CAL_ID	Calenders	{null}	{null}																																																																	
AVTTB_CALENDAR_TYPE	7	CAT_ID	{null}	{null}	{null}																																																																	

It is sometimes necessary to use PRE-SQL statements during the import process to ensure the values in the table are correct.

Overview of Worked Examples

Two **worked examples** are provided, one for importing a fixture hierarchy, and one for importing fixture information into that hierarchy.


The fixture hierarchy example is a simple one, intended to get users started.

The fixture information example is a more complicated one, intended to show more advanced use of Data Importer.

Fixture Hierarchy

Planning Adding Fixture Groups

The **Required Fixture Hierarchy** has been defined as follows:

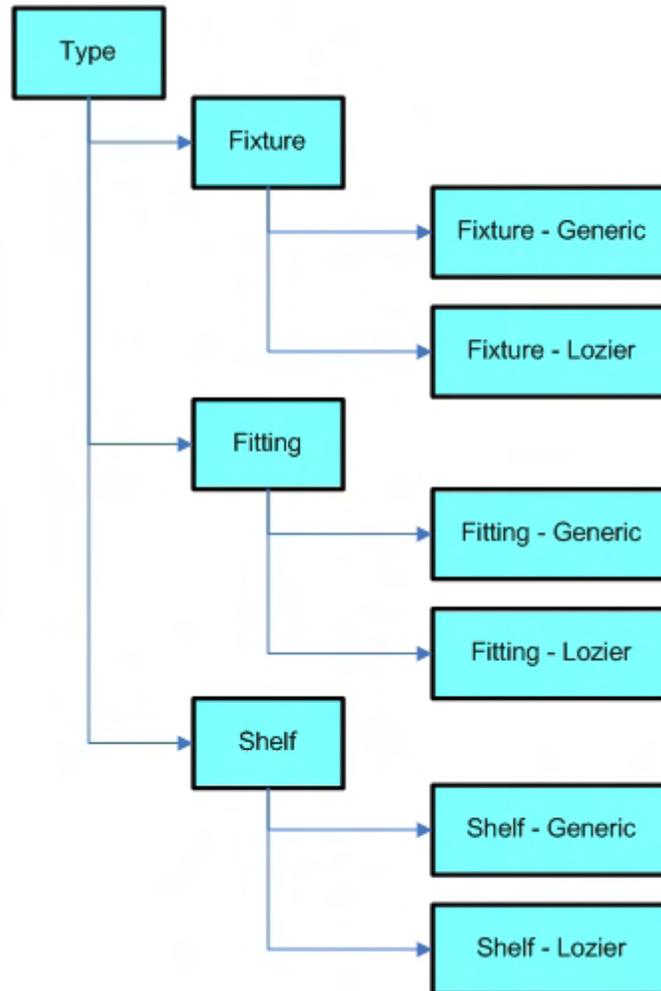

The hierarchy has three levels.

- Type is the default root of the hierarchy and cannot be changed.
- Fixture, Fitting and Shelf form the three options for the next level in the hierarchy.
- The final level has two options for each type of equipment, for example Fixture - Generic and Fixture - Lozier.


Note: If importing a hierarchy, it is strongly recommended that each node in the hierarchy has a unique name.

That is because Data Importer will use a Look-up to assign a Block Group ID to each node. (BLG_ID in the AVTTB_BLOCK GROUP TABLE.)

If the node names are not unique (for example if we had Generic at each level rather than Fixture-Generic, Fitting-Generic and Shelf-Generic) the look up would fail because the node name is not unique.

Planning the Import from the Schema

To add the **Fixture Hierarchy**, we consult the schema:

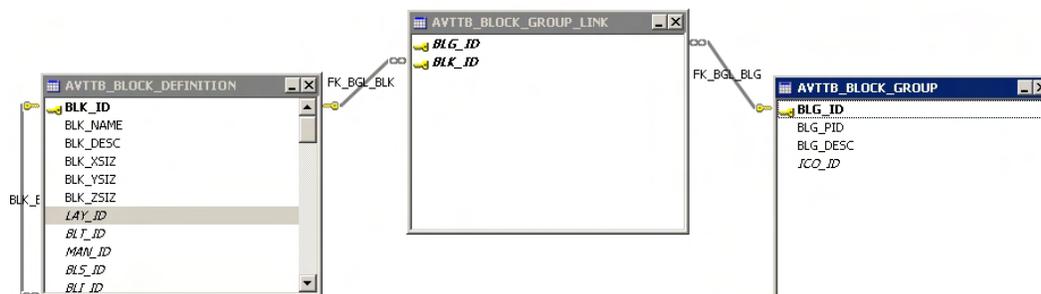

We note that we only have to populate the AVTTB_BLOCK_GROUP table.

(If we add fixtures, much of the information will go into the AVTTB_BLOCK_DEFINITION table. The AVTTB_BLOCK_GROUP_LINK table will then form the necessary line between the Block Groups and the Blocks they contain).

And the Block Group Table is as follows:

Column Na...	Datatype	Key	Not Null	Default	Rule
BLG_ID	int	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		
BLG_PID	int	<input type="checkbox"/>	<input type="checkbox"/>		
BLG_DESC	nvarchar(80)	<input type="checkbox"/>	<input checked="" type="checkbox"/>		
ICO_ID	int	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(0)	

There are four columns in the table. We must populate three of them:

Column	Purpose	Comment
BLG_ID	Block Group ID	(Primary Key)
BLG_PID	Block Group Parent ID	Required for anything but the first level of the hierarchy (Type)
BLG_DESC	Block Group Description	The name of the Block Group

The fourth column ICO_ID (Icon ID) is non-nullable but has a default, so we will not need to import this information.

Import Type, Definition and Lookups

We will create a new import type: **Fixture Hierarchy**.

Fixture Hierarchy will have three Import Definitions in it: Hierarchy Level 1, Hierarchy Level 2, and Hierarchy Level 3.

The Import Definitions will have the following Import Fields:

Hierarchy Level 1

Data	Column	Data Type	Key	Not Null	Default
Group ID	BLG_ID	Integer	Yes	Yes	
Block Description	BLG_DESC	Nvarchar	No	Yes	

The Group ID will have to be assigned by looking up the next required value from the database.

The Block Description will be read from the Data Import spreadsheet.

The Icon (which has an available default set) can be read from the database.

Note: No Group Parent will be required for this level of the hierarchy, as it is the top level.

Hierarchy Level 2

Data	Column	Data Type	Key	Not Null	Default
Group ID	BLG_ID	Integer	Yes	Yes	
Group Parent	BLG_PID	Integer	No	No	
Block Description	BLG_DESC	Nvarchar	No	Yes	

The Group ID will have to be assigned by looking up the next required value from the database.

The Group Parent will be defined as a Look-up value.

The Block Description will be read from the Data Import spreadsheet.

The Icon (which has an available default set) can be read from the database.

Hierarchy Level 3

Data	Column	Data Type	Key	Not Null	Default
Group ID	BLG_ID	Integer	Yes	Yes	
Group Parent	BLG_PID	Integer	No	No	
Block Description	BLG_DESC	Nvarchar	No	Yes	

The Group ID will have to be assigned by looking up the next required value from the database.

The Group Parent will be defined as a Look-up value.

The Block Description will be read from the Data Import spreadsheet.

The Icon (which has an available default set) can be read from the database.

Note: Note how these Import fields match up with the columns in the AVTTB_BLOCK_GROUP table.

Column Na...	Datatype	Key	Not Null	Default	Rule
BLG_ID	int	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		
BLG_PID	int	<input type="checkbox"/>	<input type="checkbox"/>		
BLG_DESC	nvarchar(80)	<input type="checkbox"/>	<input checked="" type="checkbox"/>		
ICO_ID	int	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(0)	

We will also need a look up (Block Group - PK). This will be used to convert the Block Group Description (BLG_DESC) into the Block Group ID (BLG_ID).

The Data Import Spreadsheet

Once the required data is known, the data import spreadsheet can be configured as required.

	A	B	C	D
1	Hierarchy Level 1 Description	Hierarchy Level 2 Description	Hierarchy Level 3 Description	
2	1	2	3	
3	Type	Fixtures	Fixtures - Generic	
4	Type	Fixtures	Fixtures - Lozier	
5	Type	Fittings	Fittings - Generic	
6	Type	Fittings	Fittings - Lozier	
7	Type	Shelves	Shelves - Generic	
8	Type	Shelves	Shelves - Lozier	
9				

Row 1 contains the title of the information to be held below. This will be useful when configuring the Import Definition, but will not be imported itself.

Row 2 numbers the information to be imported. This will also be useful when configuring the Import Definition, but again will not be imported.


Rows 3 - 8 contain the information to be imported. Note that each row must contain a full list of every level in the hierarchy.

Output from the Spreadsheet

Once the information has been entered into the spreadsheet it must be saved into the Import Directory for Macro Space Management.


Note: Data Import will only work if the import information is in this specific directory.

This is done by using the Save-As option in Excel.

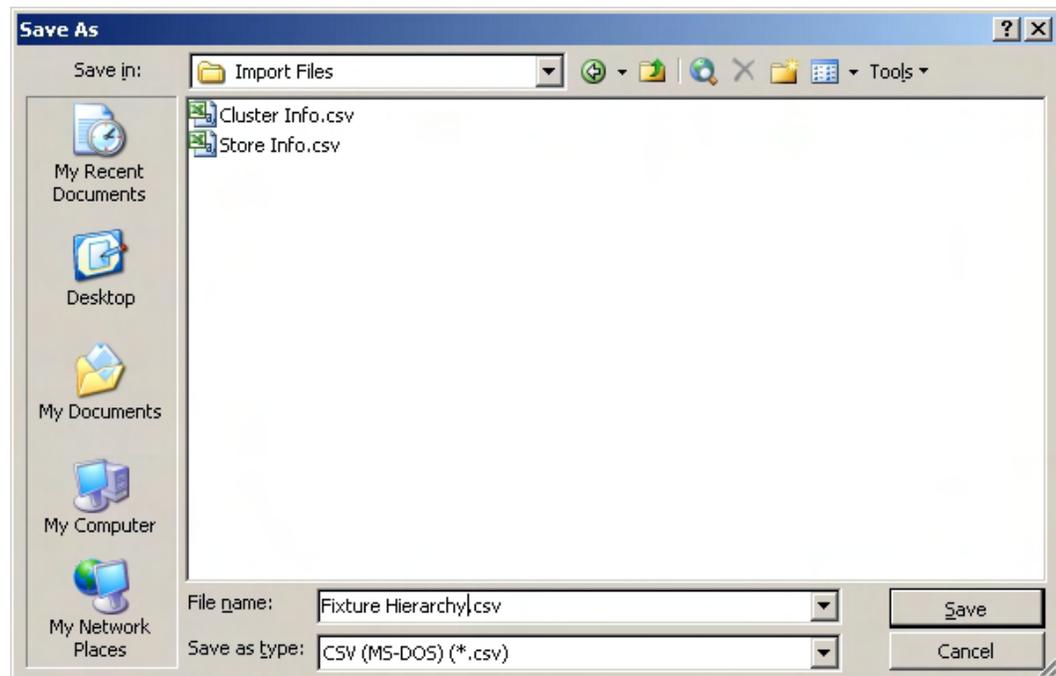

Note: The Type must be set to CSV (or other type compatible with Data Importer)


This will result in a file with all the data for an individual Fixture Group on one line, with the data separated by commas.

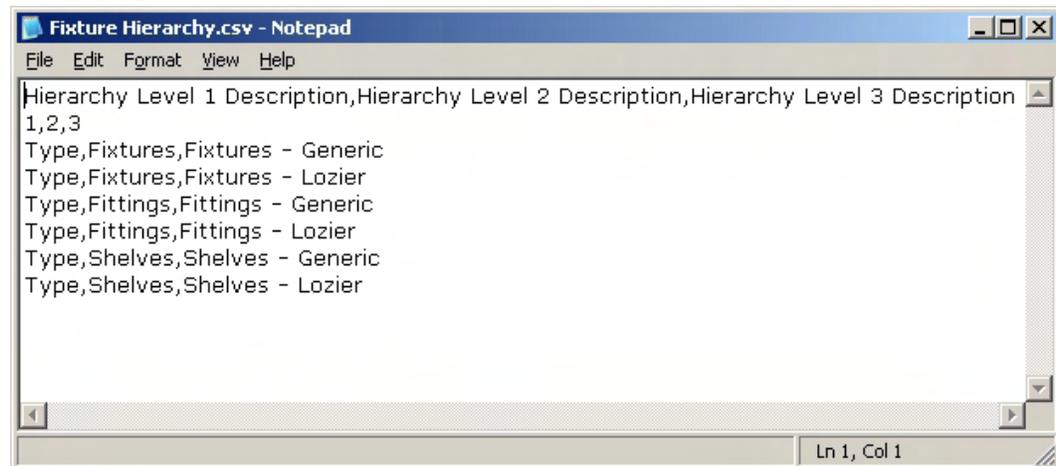


Adding an Import Type

Configuring the Import Type


To Add a new Import Type, use <Ctrl + A> to show the Edit menu and select Edit Types

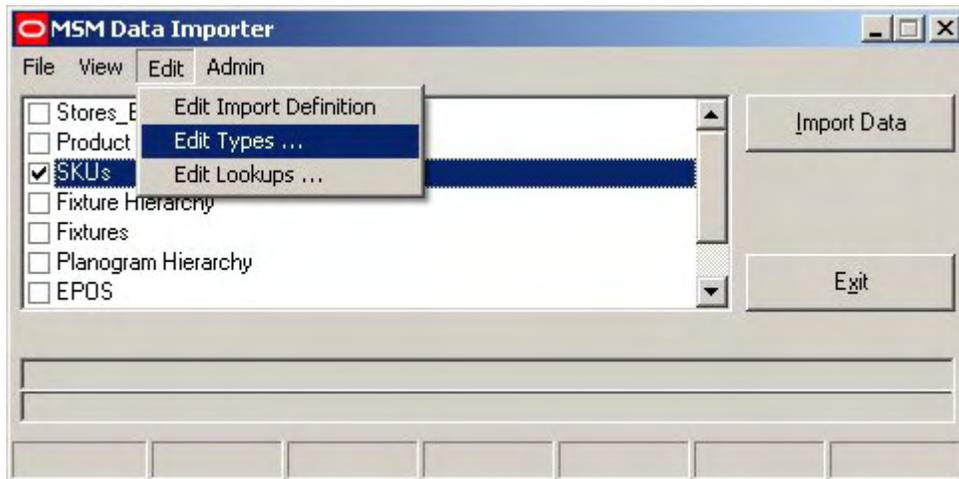

This will bring up the Import types dialogue box. Click on the Add icon.

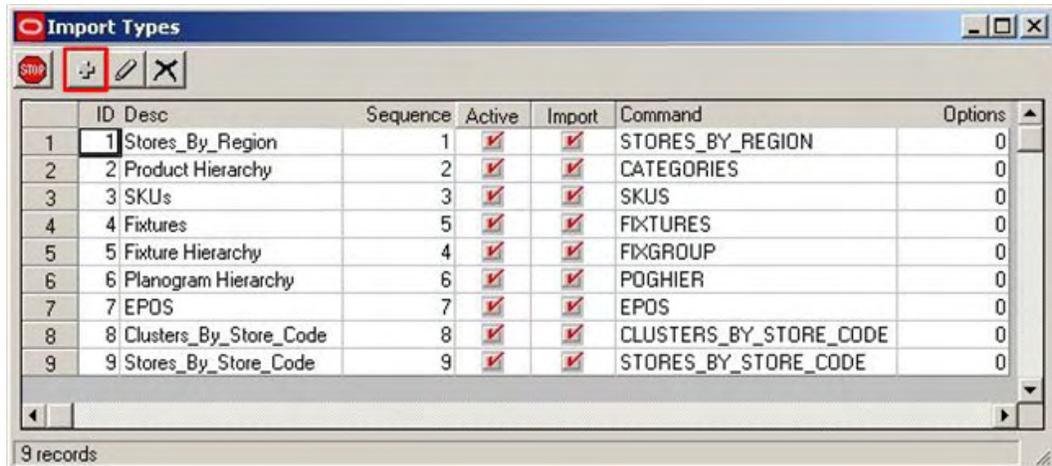

This will bring up the Add Import type dialogue box.

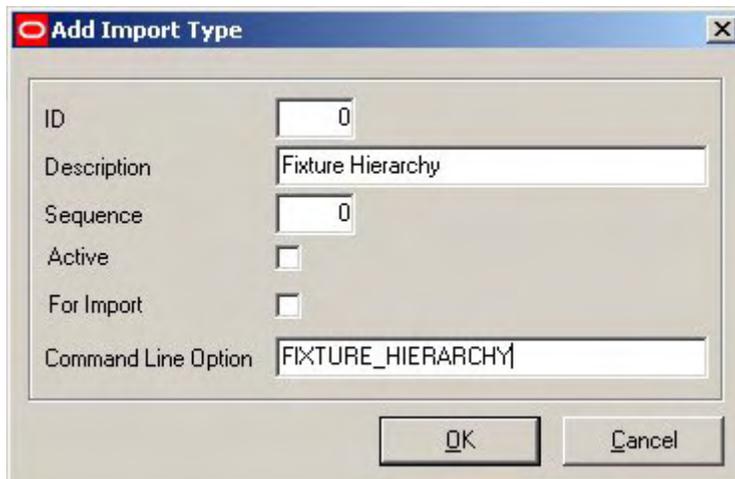

Fill it in as required and click on OK.


(The ID will be automatically changed by Macro Space Management).

(For the Import type to be available for further editing, the Active and For Import check boxes should be ticked).


Adding a Look Up

Configuring the Look-Up


To configure a lookup, select the Edit Lookups option from the Edit pull down menu.

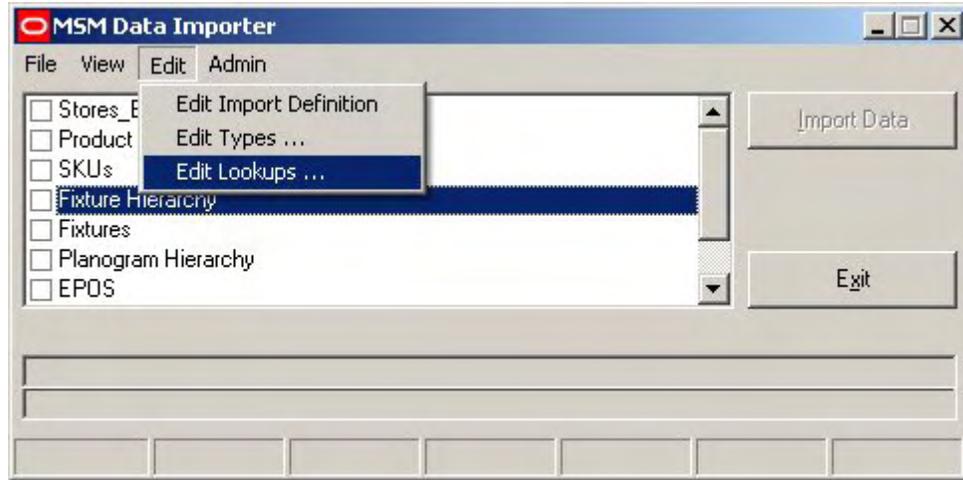

This will bring up the Import Lookups dialogue box. Click on the Add icon to add a new Lookup.

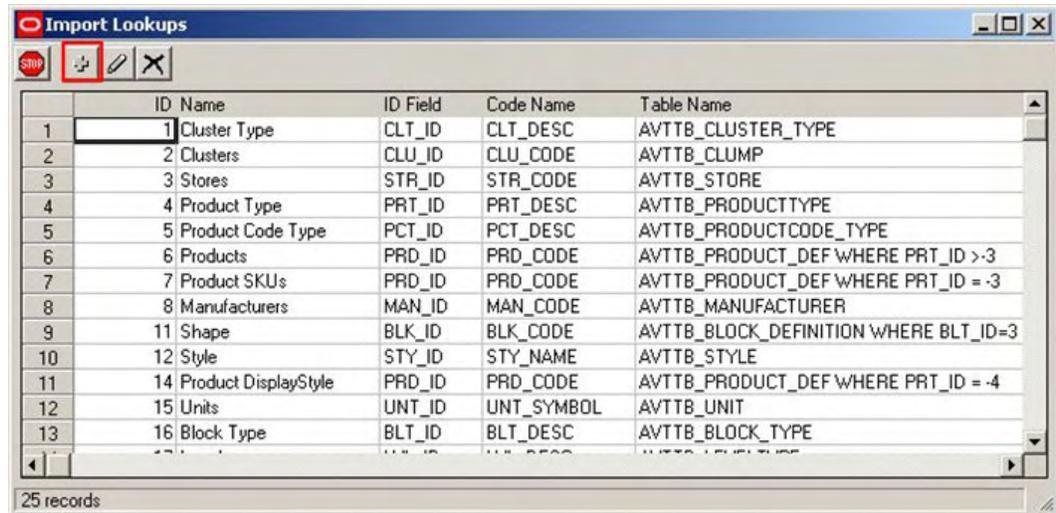

This will bring up the Add Import Lookup dialogue box.

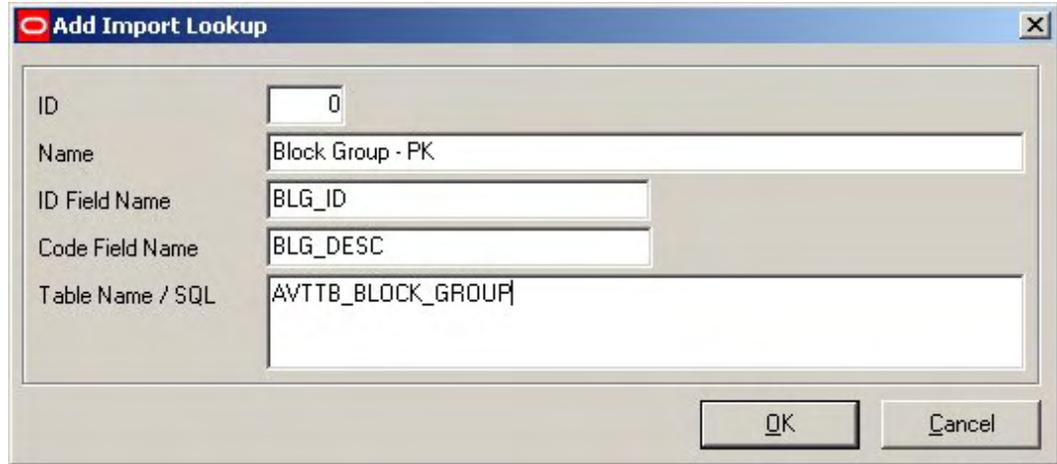


This look up can be used to convert a Block Group Description (BLG_DESC) into a Block Group ID (BLG_ID).

Adding the Fixture Hierarchy Import Definitions


Opening the Dialogue

To **open the Import Dialogue option**, highlight the Import type and select Edit Import Definition from the Edit pull down menu.

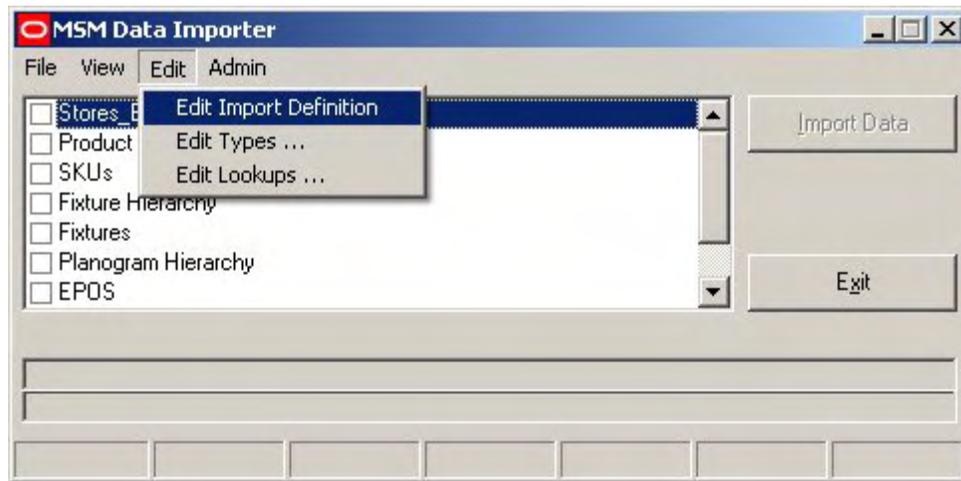


Note: The edit option is only available to Administrators. It can be toggled into view by the use of <Ctrl + a>.

This will bring up the Import Design dialogue box.

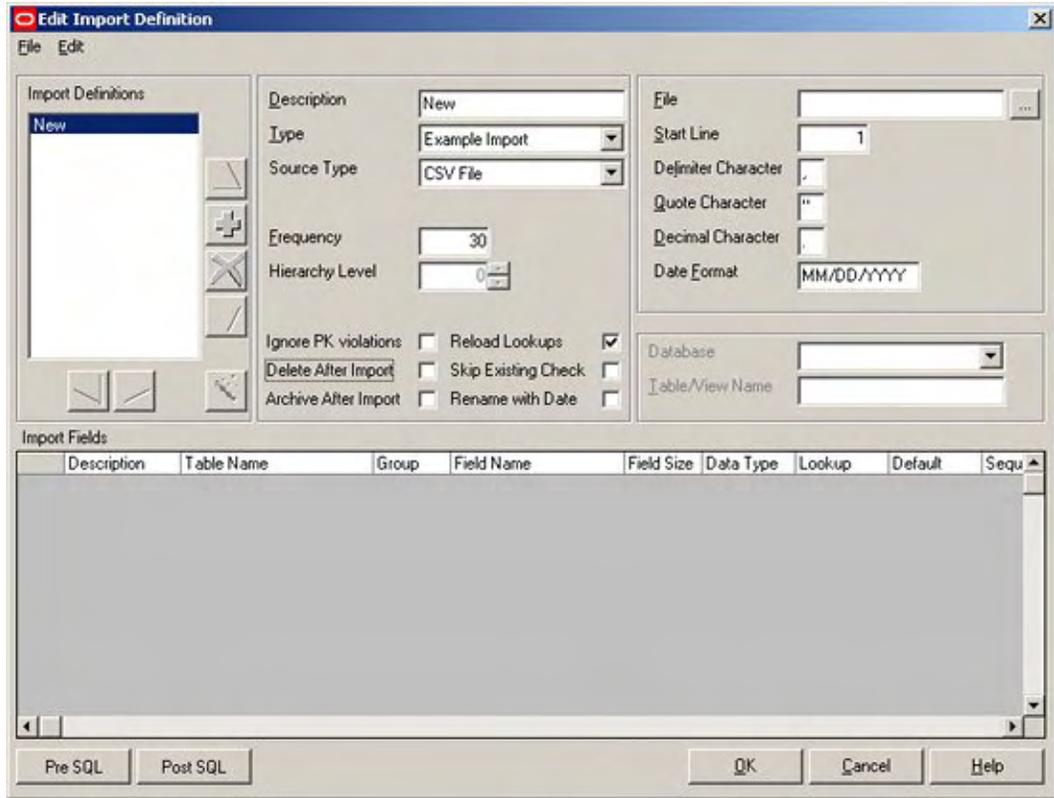

Setting the Levels for the Import Definitions

The Levels for the Import Definitions should be set first.

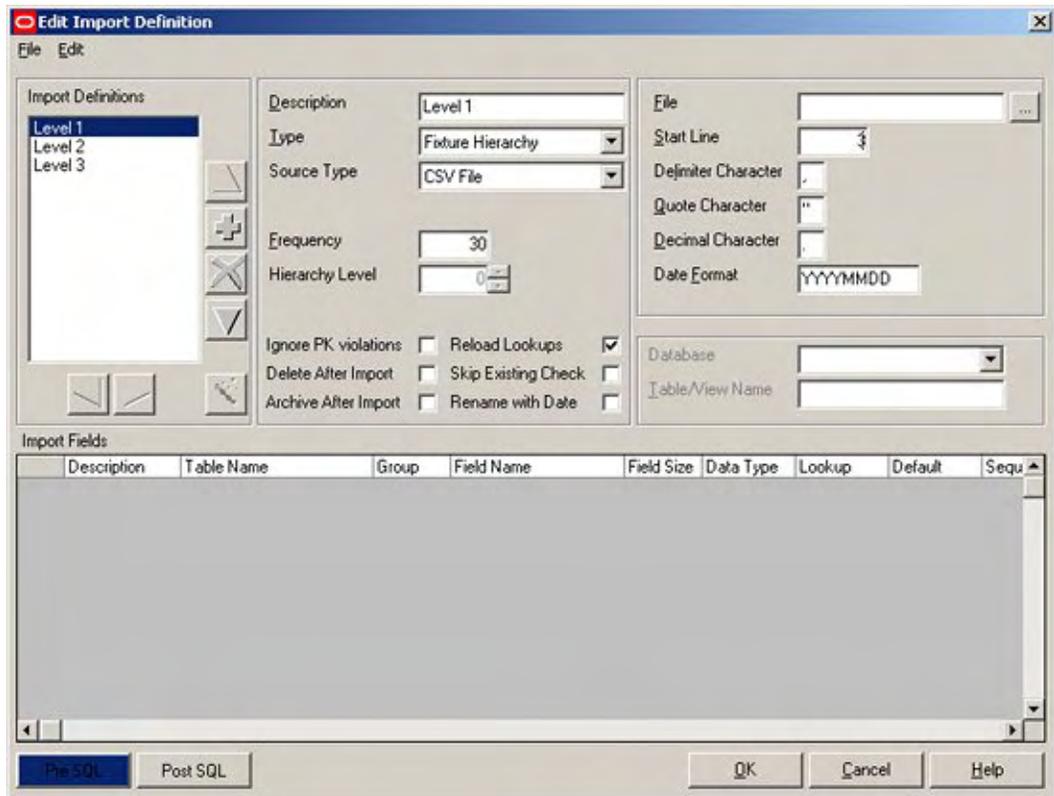


As there are three levels in the import definition, these will be called Hierarchy Level 1, Hierarchy Level 2 and Hierarchy Level 3 (as per the data to be imported).

The levels are added by clicking on the Add icon in the Import Definitions frame. The level names are changed by editing the data in the Description field in the Description Frame.

Setting the File Information


The **File information** is set in the File Information frame.

Each Import Definition will require the file to be set - this is because information could be read from several different files during the import.

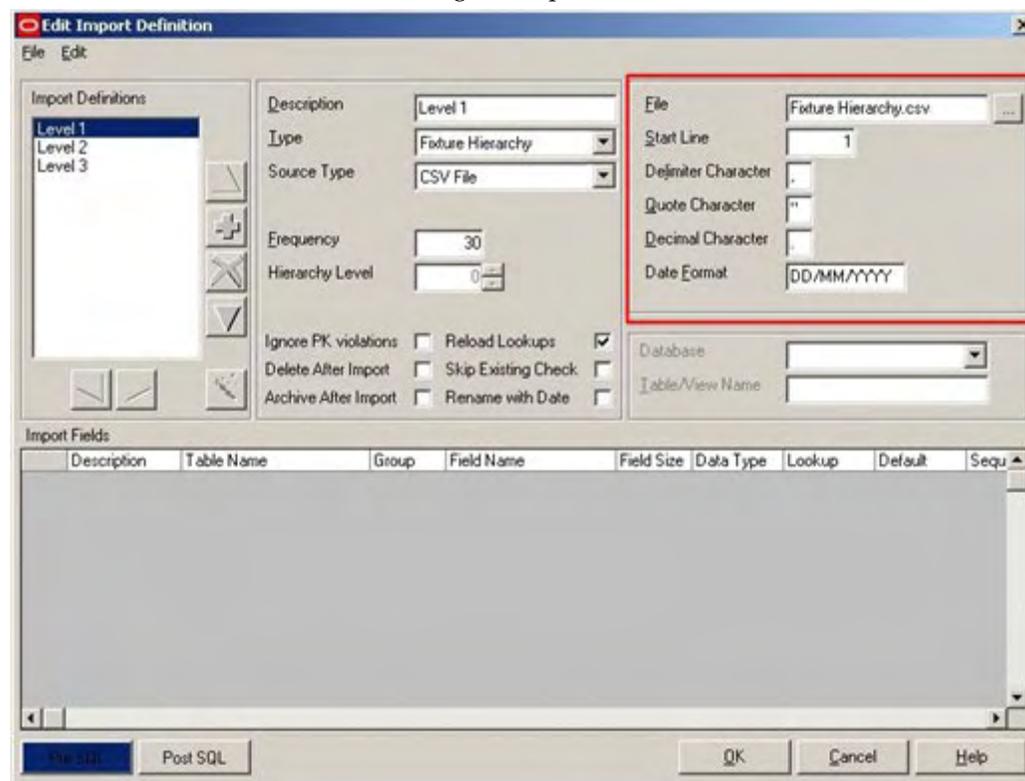

File is set by clicking on the File button and selecting the Fixture Hierarchy.csv file in the Import directory.

The rest of the information has to be set pertinent to the format of the file:

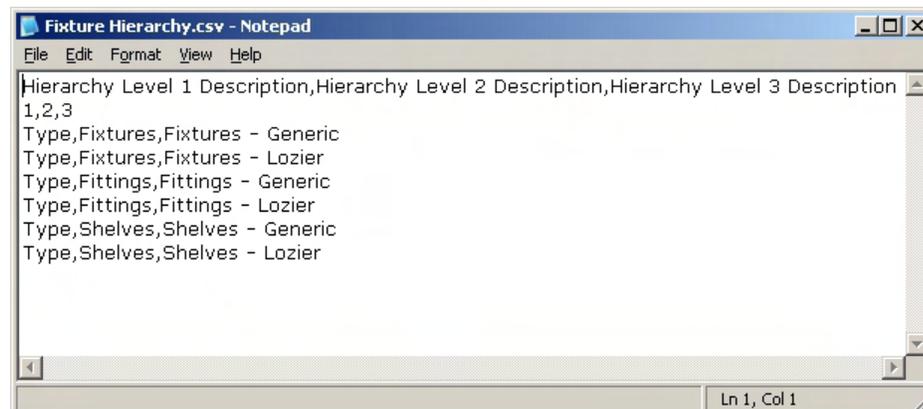

Start Line is set to 1: this will allow us to confirm the data we are selecting is correct. (This setting will be changed later to 3).

Delimiter Character is set to ',' as each item of data is separated from the next by a comma.


Quote Character is set to "" to enable us to import text strings if required. (Not required for this definition).

Decimal Character is set to '.' as we will be using a full stop, not a comma, to indicate decimal places. (Not required for this definition).

Date Format is set to DD/MM/YYYY to indicate we will be importing dates in the form 23/12/2007. (Not required for this definition).


Bringing up the Import Field GUI

To set the **Hierarchy Level 1 import definition**, right click on the titles at the head of the Import Field frame.

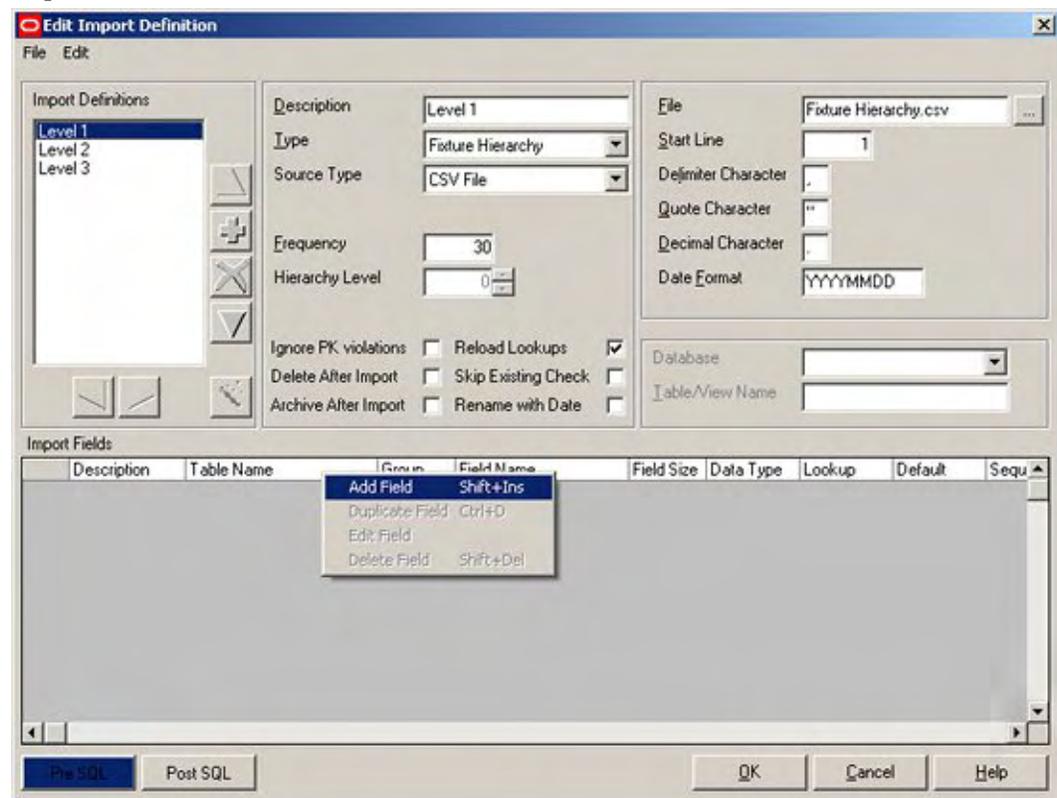


Right click and select Add Field.

This will bring up the Import field dialogue box which can then be configured for the required parameters.

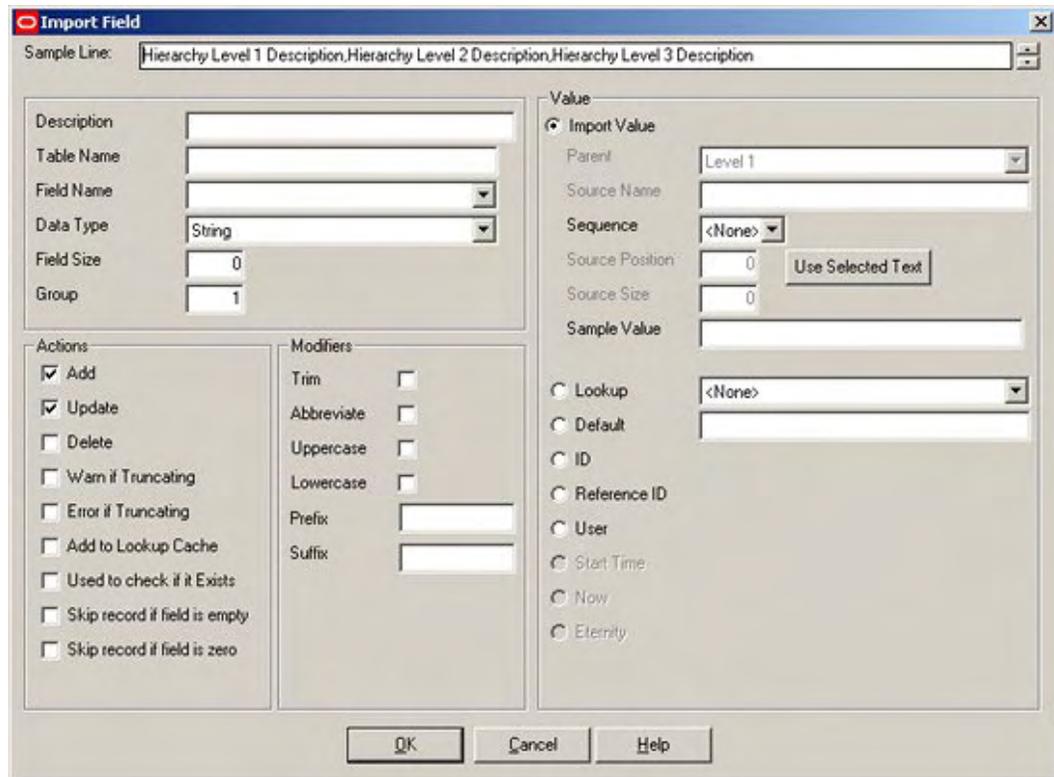

Hierarchy Level 1 Import Fields

There are two Import Fields to configure for Hierarchy Level 1, Block Group ID and Block Group Description.

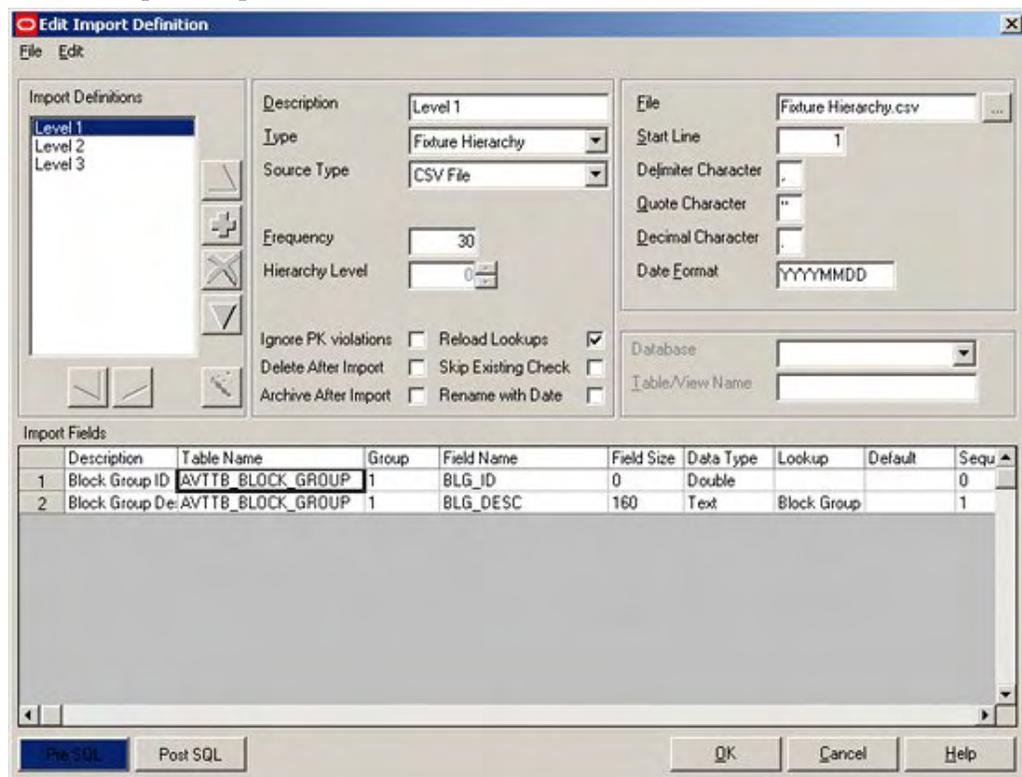

This Hierarchy level will require a Pre SQL statement. This will be used to ensure the Next ID table (AVTTB_NEXTID) is up to date with the latest ID for Block Groups.

Configuring the Level 1 Information - Block Group ID

The Level 1 Block Group Information is configured as required:

The screenshot shows the 'Import Field' dialog box with the following configuration:

- Sample Line:** Hierarchy Level 1 Description,Hierarchy Level 2 Description,Hierarchy Level 3 Description
- Description:** Block Group ID
- Table Name:** AVTTB_BLOCK_GROUP
- Field Name:** BLG_ID
- Data Type:** Double
- Field Size:** 0
- Group:** 1
- Value:**
 - Import Value
 - Lookup
 - Default
 - ID
 - Reference ID
 - User
 - Start Time
 - Now
 - Eternity
- Actions:**
 - Add
 - Update
 - Delete
 - Warn if Truncating
 - Error if Truncating
 - Add to Lookup Cache
 - Used to check if it Exists
 - Skip record if field is empty
 - Skip record if field is zero
- Modifiers:**
 - Trim
 - Abbreviate
 - Uppercase
 - Lowercase
 - Prefix
 - Suffix

Comments

The Add option has been checked in the Actions frame as we will wish to add a Block Group ID if the Block Group does not exist.

The ID radio button in the Value Frame has been selected to indicate we need to add a numeric value from the AVTTB_NEXTID table.

Configuring the Level 1 Information - Description

The Level 1 Description is configured as follows:

Import Field

Sample Line: Hierarchy Level 1 Description.Hierarchy Level 2 Description.Hierarchy Level 3 Description

Description: Block Group Description
 Table Name: AVTTB_BLOCK_GROUP
 Field Name: BLG_DESC
 Data Type: String
 Field Size: 160
 Group: 1

Value

Import Value
 Parent: Level 1
 Source Name:
 Sequence: 1
 Source Position: 0 Use Selected Text
 Source Size: 0
 Sample Value: Hierarchy Level 1 Description

Lookup: Block Group - PK
 Default
 ID
 Reference ID
 User
 Start Time
 Now
 Eternity

Actions:
 Add
 Update
 Delete
 Warn if Truncating
 Error if Truncating
 Add to Lookup Cache
 Used to check if it Exists
 Skip record if field is empty
 Skip record if field is zero

Modifiers:
 Trim:
 Abbreviate:
 Uppercase:
 Lowercase:
 Prefix:
 Suffix:

OK Cancel Help

Comments

Add has been checked because we wish to add the block description to the AVTTB_BLOCK_GROUP_LINK table.

Add to Lookup Cache has been selected because we are using a lookup and this will speed up performance.

Used to check if it Exists has been checked because we want to ensure that the description does not already exist in the database. This will allow us to avoid duplicate entries.

Skip record if field is empty has been checked to allow a record to be skipped if it contains a blank description.

Abbreviate has been chosen to so that any data being imported over 80 characters in length are truncated to that length.


Sequence has been set to 1, to enable data to be selected from the right section of the .csv file.

We are using the Lookup 'Block Groups' to convert the Description into a Block Group ID. This will be used to check if the description already exists.

Note: As we have selected Sequence 1 from the .csv file, the Sample value is showing what is in that position in the file - in this instance Hierarchy Level 1.

Hierarchy Level 2 Import Fields


There are **three Import Fields** to configure for Hierarchy Level 2, Block Group ID, Block Group Description and Block Group Parent ID.

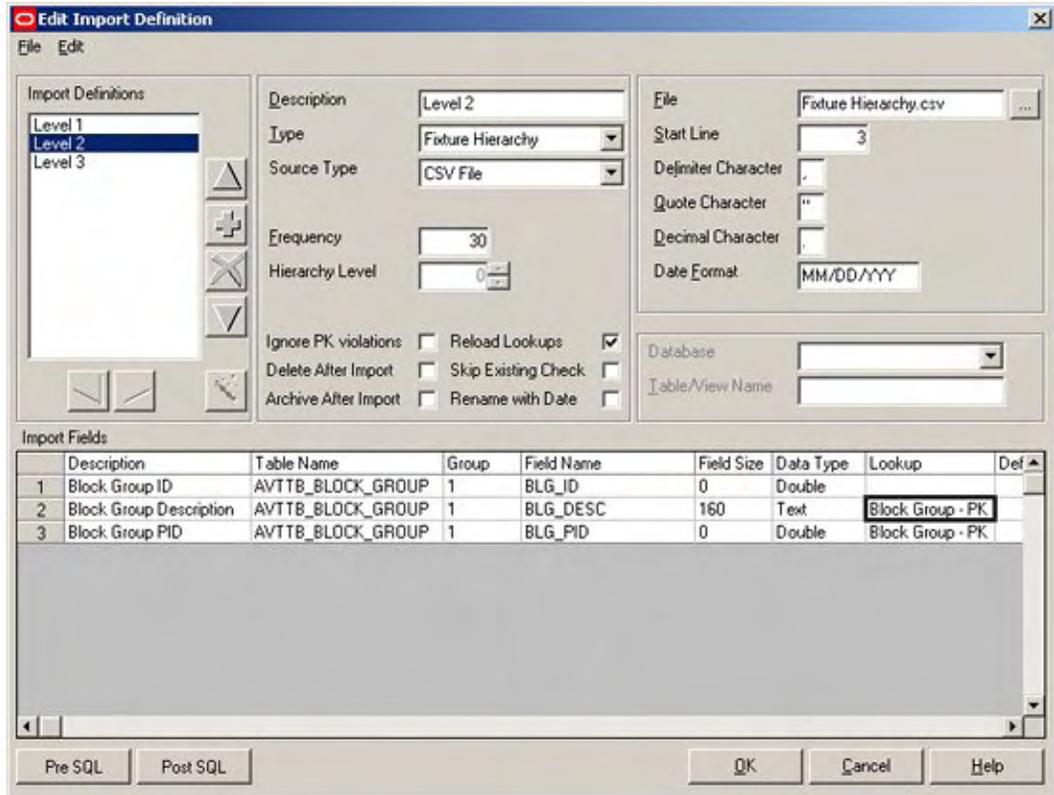

This Hierarchy level will not require any Pre or Post SQL.

Configuring the Level 2 Information - Block Group ID

The Level 2 Block Group Information is configured as required:

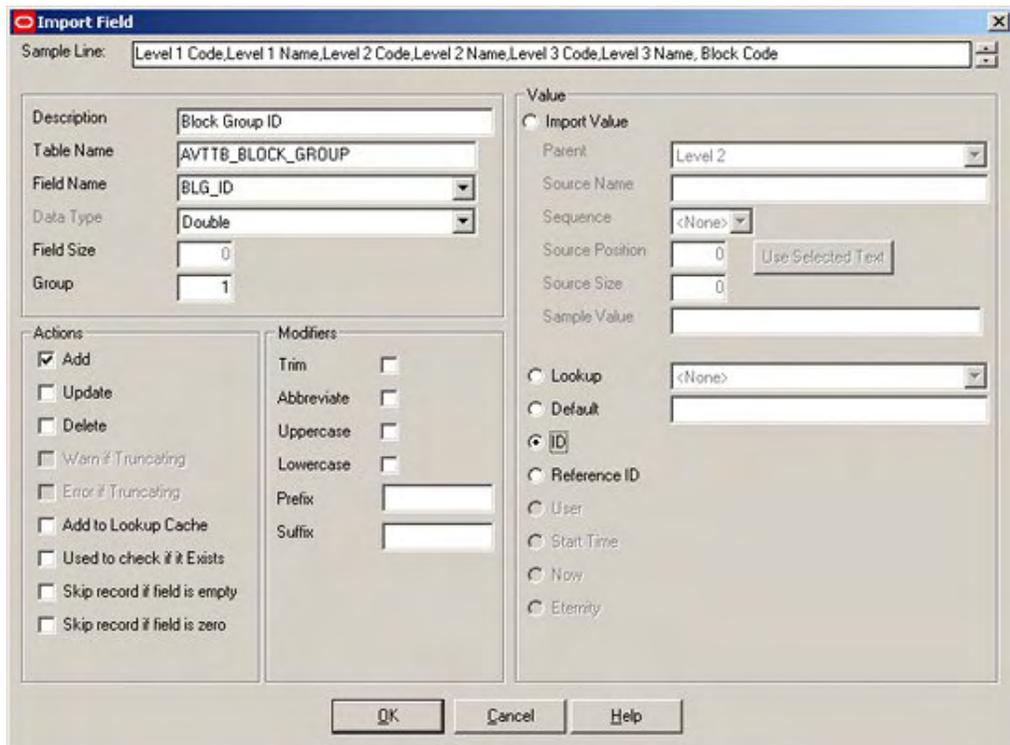

It is essentially a duplicate of the Level 1 Block Group ID import.

Configuring the Level 2 Information - Description

The **Level 2 Description** is configured as follows:

The screenshot shows the 'Import Field' dialog box with the following configuration:

- Sample Line:** Hierarchy Level 1 Description.Hierarchy Level 2 Description.Hierarchy Level 3 Description
- Description:** Block Group Description
- Table Name:** AVTTB_BLOCK_GROUP
- Field Name:** BLG_DESC
- Data Type:** String
- Field Size:** 160
- Group:** 1
- Value:**
 - Import Value
 - Parent: Level 2
 - Source Name: (empty)
 - Sequence: 2
 - Source Position: 0
 - Source Size: 0
 - Sample Value: Hierarchy Level 2 Description
 - Lookup: <None>
 - Default: (empty)
 - ID
 - Reference ID
 - User
 - Start Time
 - Now
 - Eternity
- Actions:**
 - Add
 - Update
 - Delete
 - Warn if Truncating
 - Error if Truncating
 - Add to Lookup Cache
 - Used to check if it Exists
 - Skip record if field is empty
 - Skip record if field is zero
- Modifiers:**
 - Trim:
 - Abbreviate:
 - Uppercase:
 - Lowercase:
 - Prefix: (empty)
 - Suffix: (empty)

It is essentially a duplicate of the Level 1 Description, except the Sequence has been changed to 2 to read information from a different part of the .csv file.

Configuring the Level 2 Information - Parent Group

Parent Group is a new import field for Level 2 - it was not required for Level 1.

Import Field

Sample Line: Hierarchy Level 1 Description,Hierarchy Level 2 Description,Hierarchy Level 3 Description

Description: Block Group PID
 Table Name: AVTTB_BLOCK_GROUP
 Field Name: BLG_PID
 Data Type: Double
 Field Size: 0
 Group: 1

Value

Import Value
 Parent: Level 2
 Source Name:
 Sequence: 1
 Source Position: 0 Use Selected Text
 Source Size: 0
 Sample Value: Hierarchy Level 1 Description

Lookup: Block Group - PK
 Default
 ID
 Reference ID
 User
 Start Time
 Now
 Eternity

Actions

Add
 Update
 Delete
 Warn if Truncating
 Error if Truncating
 Add to Lookup Cache
 Used to check if it Exists
 Skip record if field is empty
 Skip record if field is zero

Modifiers

Trim:
 Abbreviate:
 Uppercase:
 Lowercase:
 Prefix:
 Suffix:

OK Cancel Help

Comments


Add and Update have been checked because we wish to add the description if new, or update it if the description already exists.

Sequence has been set to 1 to pick up the information from the correct part of the CSV file.

Lookup is being used to convert the parent group name to a Block Group ID (parent ID) that will be inserted into the database.

Hierarchy Level 3 Import Fields


There are **three Import Fields** to configure for Hierarchy Level 2, Block Group ID, Block Group Description and Block Group Parent ID.

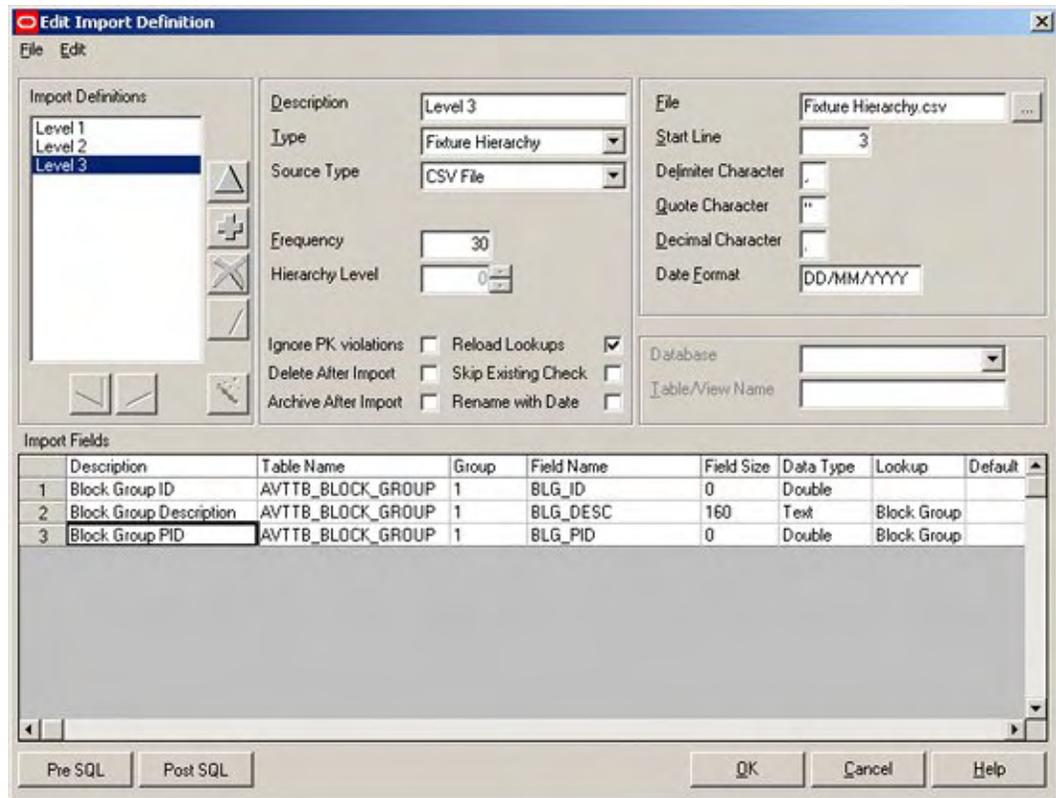

This Hierarchy level will not require any Pre or Post SQL.

Configuring the Level 3 Information - Block Group ID

The Level 3 Block Group Information is configured as required:

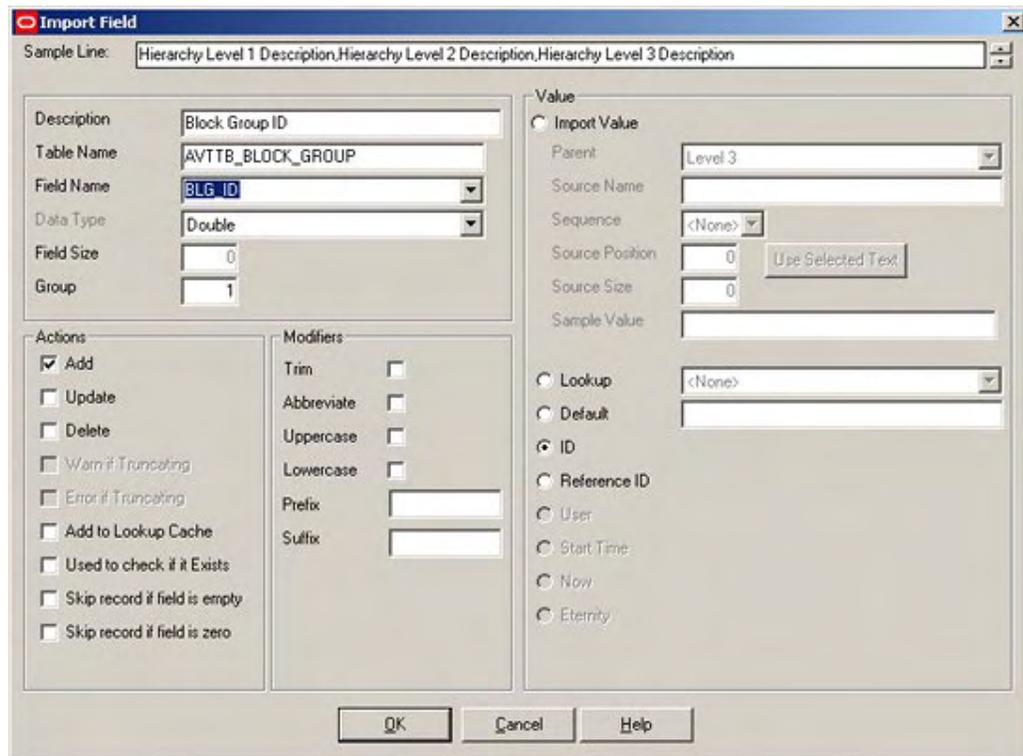

It is essentially a duplicate of the Level 2 Block Group ID import.

Configuring the Level 3 Information - Description

The Level 3 Description is configured as follows:


The screenshot shows the 'Import Field' dialog box with the following configuration:

- Sample Line:** Hierarchy Level 1 Description,Hierarchy Level 2 Description,Hierarchy Level 3 Description
- Description:** Block Group Description
- Table Name:** AVTTB_BLOCK_GROUP
- Field Name:** BLG_DESC
- Data Type:** String
- Field Size:** 160
- Group:** 1
- Value:**
 - Import Value
 - Lookup: Block Group - PK
 - Default
 - ID
 - Reference ID
 - User
 - Start Time
 - Now
 - Eternity
- Sequence:** 3
- Source Position:** 0
- Source Size:** 0
- Sample Value:** Hierarchy Level 3 Description
- Actions:**
 - Add
 - Update
 - Delete
 - Warn if Truncating
 - Error if Truncating
 - Add to Lookup Cache
 - Used to check if it Exists
 - Skip record if field is empty
 - Skip record if field is zero
- Modifiers:**
 - Trim
 - Abbreviate
 - Uppercase
 - Lowercase
 - Prefix
 - Suffix

It is essentially a duplicate of the Level 1 and 2 Descriptions, except the Sequence has been changed to 3 to read information from a different part of the .csv file.

Configuring the Level 3 Information - Parent Group

The Level 3 Parent Group Information is configured as required:

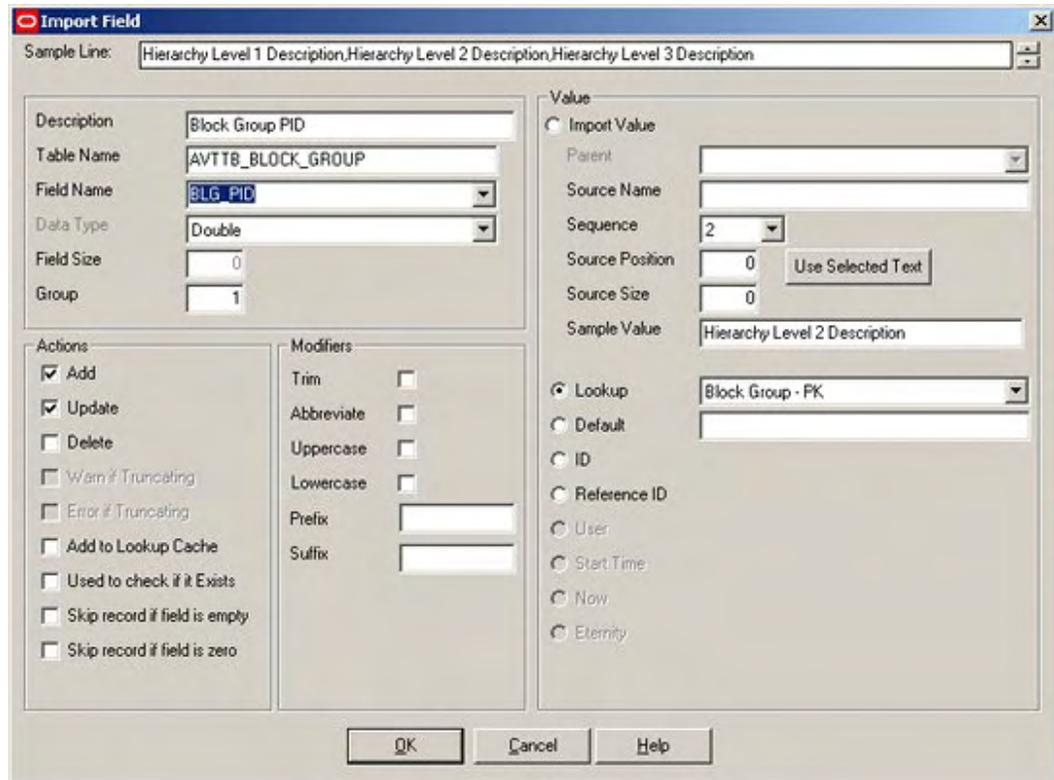

It is essentially a duplicate of the Level 2 Parent Group, except the Sequence has been changed to 2 to read information from a different part of the .csv file.

Adding the SQL Statements

Only one **SQL statement** is required for this definition.


It is to ensure that the value for the Block Group ID (BLK_ID in the AVTTB_BLOCK_GROUP table) is correct.

Columns Data Indexes Relationships Constraints Triggers Partitions Grants Uses Used By Extended Properties						
Drag a column header here to group by that column						
NID_TABLENAME	NID_NEXTID	NID_COLUMNNA...	NID_D...	NID_LOCKED_BY	NID_LOCKED	
AVTTB_AUTOFILL_RULE	1	AFR_ID	{null}	{null}	{null}	{null}
AVTTB_AUTOTEXT_TYPE	8	ATT_ID	{null}	{null}	{null}	{null}
AVTTB_BLOCK_DEFINITION	124	BLK_ID	{null}	{null}	{null}	{null}
AVTTB_BLOCK_GROUP	99	BLG_ID	{null}	{null}	{null}	{null}
AVTTB_BLOCK_INSERTION	42	BLI_ID	{null}	{null}	{null}	{null}
AVTTB_BLOCK_SHAPE	4	BLS_ID	{null}	{null}	{null}	{null}
AVTTB_BLOCK_TYPE	9	BLT_ID	{null}	{null}	{null}	{null}
AVTTB_CALENDAR	1	CAL_ID	Calendars	{null}	{null}	{null}
AVTTB_CALENDAR_TYPE	7	CAT_ID	{null}	{null}	{null}	{null}


The following statement will be required:

```
UPDATE AVTTB_NEXTID SET NID_NEXTID = (SELECT COALESCE(MAX(BLK_ID),0)
+ 1 FROM AVTTB_BLOCK_GROUP) WHERE
NID_TABLENAME='AVTTB_BLOCK_GROUP'
```

This is added by clicking on the Pre SQL button at the bottom of the Import Design dialogue box for Hierarchy Level 1 to bring up the Pre-SQL dialogue box.

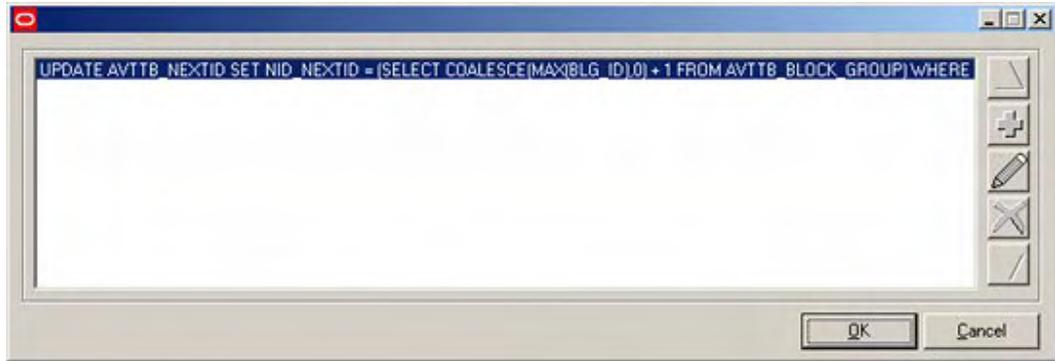


Clicking on the Add button will bring up the Add SQL dialogue box, where the SQL statement can be added.

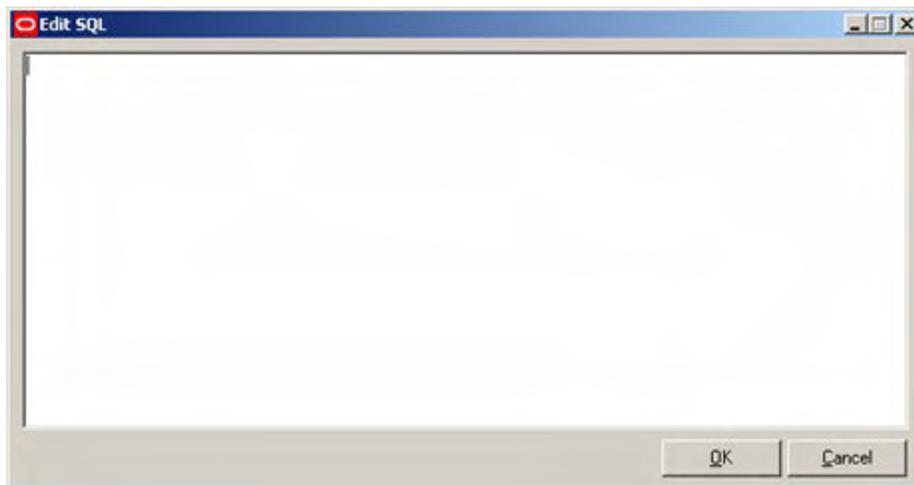

Resetting the Start Line Number

Resetting the line number is important.

Until now we have had the line number set to 1, because this reads the first line of the .csv file - the information titles.

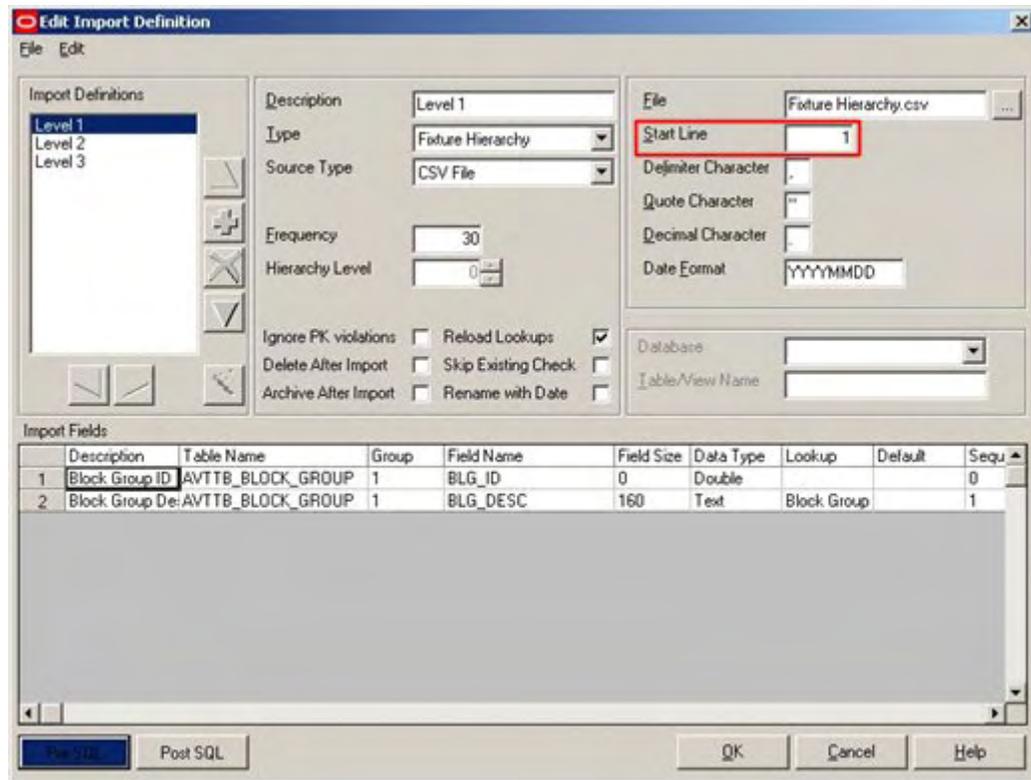

We must now set this to line number 3 for each of the Import definitions, so we read the first line of actual data.



This means the Data Import Process will read from line 3, which is the first line of data we actually want to import.

Note: Failing to reset the line number before running Data Importer is a common source of error.

Testing the Import Definition


Overview of Testing the Import Definition

It is generally a good idea to test any new import definition with a few lines of data. This will allow problems to be identified and analyzed before a full import (which could take an appreciable period of time) is carried out.


In this instance, there are only three lines of data in the Hierarchy to be imported, so it is unnecessary to carry out a small scale test.

Running Data Importer and Viewing the Error Log

Data Importer can be run by ticking the Fixture Hierarchy checkbox and clicking on Import Data.

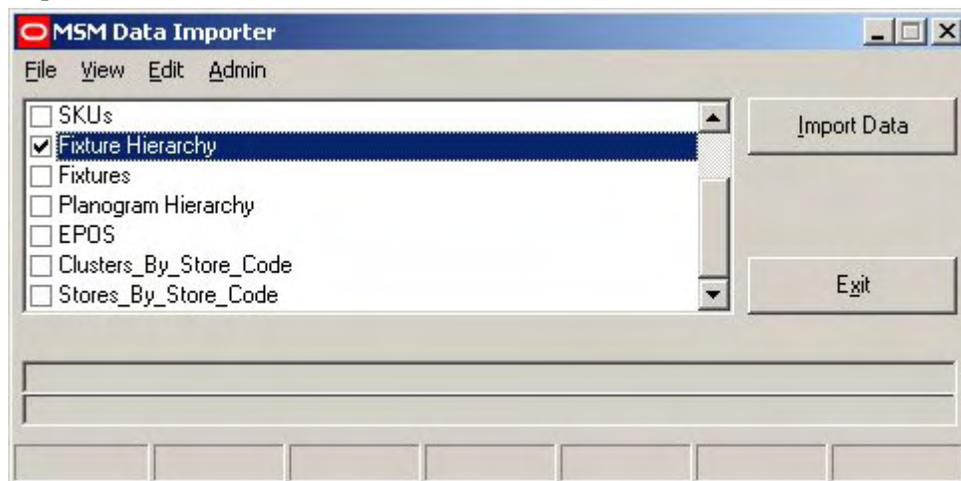

After the Import has run use the Import Log option on the View pull down menu to see how the Import has performed.

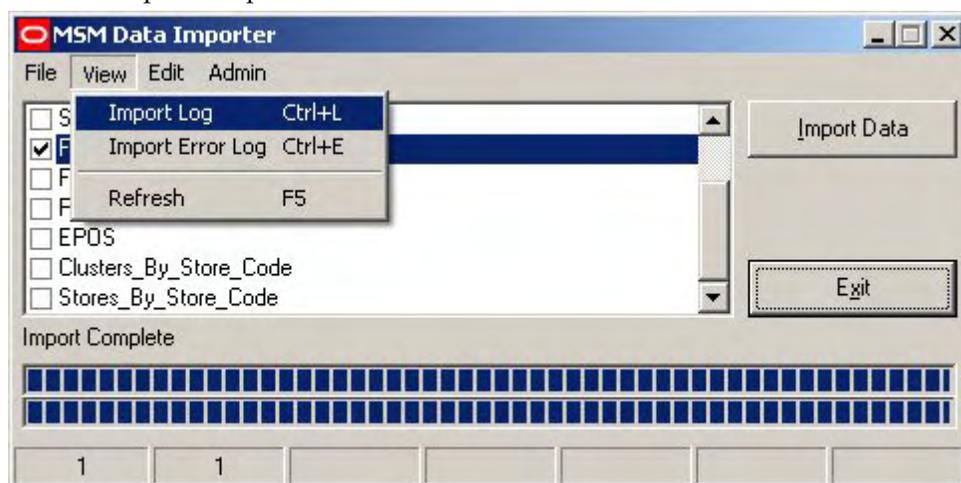

This will bring up the Import log.

ID	Type	Started	Finished	Added	Updated	Deleted	Skipped	Failed	User	Machine
1	1 Fixture Hierarchy - Level 1	29/04/2009	29/04/2009	0	0	0	0	0	pw	pwells-uk
2	2 Fixture Hierarchy - Level 2	29/04/2009	29/04/2009	0	6	0	0	0	pw	pwells-uk
3	3 Fixture Hierarchy - Level 3	29/04/2009	29/04/2009	0	8	0	0	2	pw	pwells-uk
4										

4 records

Examination of the record shows that there has been a failure during the import of Hierarchy Level 3.

Viewing the Error Log

We need to view the Error log for that specific part of the import. To do this, highlight the required line in the Import Log and select the View errors for selected log option from the View pull down menu.

ID	Type	Started	Finished	Added	Updated	Deleted	Skipped	Failed	User	Machine
1		2009	29/04/2009	0	0	0	0	0	pw	pwells-uk
2		2009	29/04/2009	0	6	0	0	0	pw	pwells-uk
3	3 Fixture Hierarchy - Level 3	29/04/2009	29/04/2009	0	8	0	0	2	pw	pwells-uk
4										


4 records

This will bring up the Import Error Log.

ID	Type	Message	Severity	Error	Input	Output
1	Level 3	Invalid lookup key for BLG_PID	1	1	= Hierarchy Level 2 Description	
2	Level 3	Invalid lookup key for BLG_PID	1	1	= 2	

1 2


The Input in the error log is 'Hierarchy Level 2' and then '2'. This suggests we are importing data from lines one and two of the .csv file, not line three as we should be. Because the data is not as expected, the import is erroring.

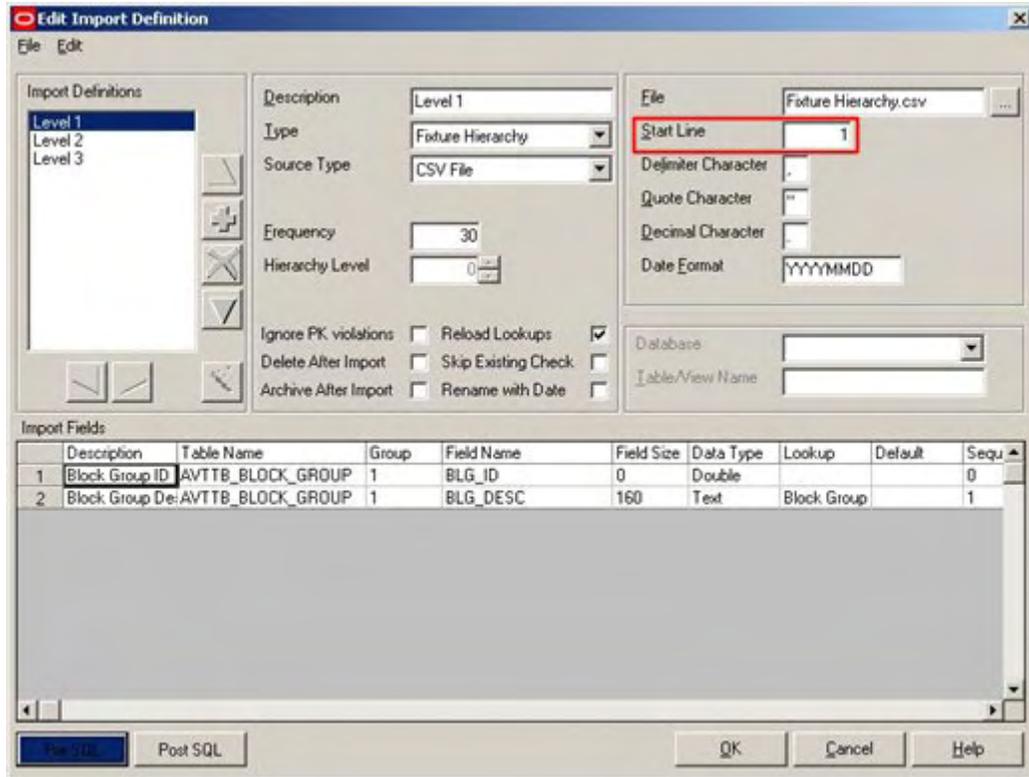

This would be readily corrected by changing the Start Line to '3', allowing the import to run correctly.

Seeing the Error in more Detail

To see the error in more detail, it is possible to do so by selecting the View Details option from the View pull down menu.

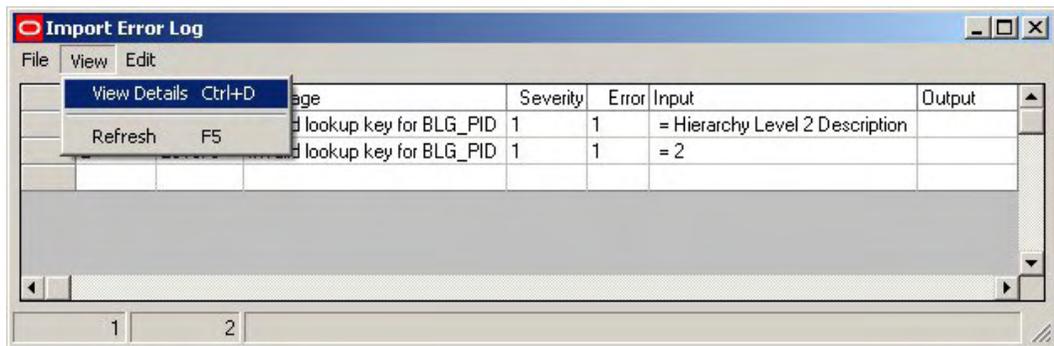


This will bring up the Error Details dialogue box, which allows the error to be seen more clearly.



This is useful if the data is extensive and difficult to see in its entirety in the Import Error Log.

Consequences of the Error

The error has resulted in some unintended groups being added to the Fixture hierarchy.

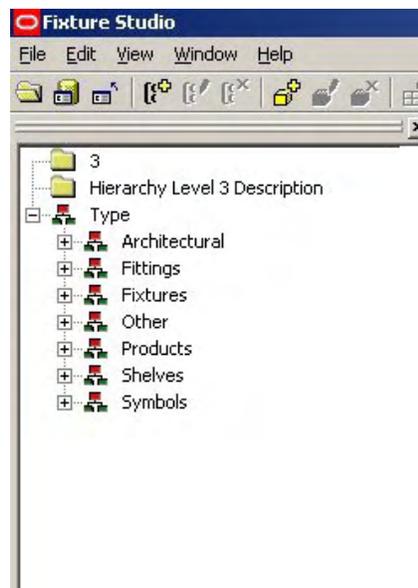

This is a good illustration as to why the import should be tested on small quantities of data before being run on a large quantity.

Adding Fixtures

Planning Adding Fixtures


Adding Fixtures is more complex than adding groups to the fixture hierarchy.

Each Fixture has a significant amount of information associated with it - much of which can be imported via Data Importer.

This example will import some (but not all) of the data required to fully define a fixture.

Planning the Fixture Import from the Schema

The exercise begins by reviewing the Entity Relationship Diagram.

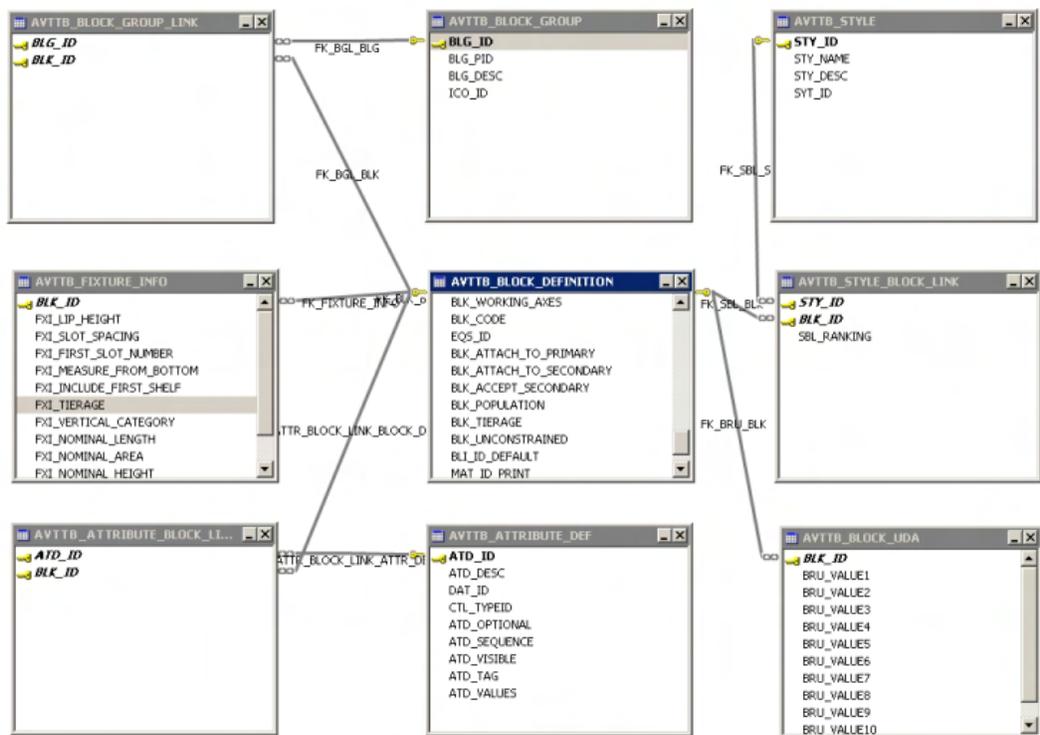

Note: The above diagram has been simplified from the full diagram. It shows the main tables, but further reference to the Entity Relationship Diagram may be required.

The majority of the information for a specific block is held in the Block Definitions Table (AVTTB_BLOCK_DEFINITIONS), but other tables will necessitate information being added.

Table	Purpose
AVTTB_BLOCK_GROUP_LINK	Holds the link between a Fixture and it's parent Fixture Group
AVTTB_FIXTURE_INFO	Holds information on a number of settings for the Fixture
AVTTB_ATTRIBUTE_BLOCK_LINK	Holds the link between a Fixture and it's assigned Attributes
AVTTB_ATTRIBUTE_DEF	Holds the block's (Fixture's) assigned Attributes
AVTTB_STYLE_BLOCK_LINK	Holds the link between a fixture and its assigned Style.
AVTTB_BLOCK_UOA	Holds the information assigned to the UDA

We next need to identify which information is required for each of these tables.

Reviewing the Block Definition Table

The Block Definition table (AVTTB_BLOCK_DEFINITION) holds much of the information on a specific type of block. It should be reviewed to establish which columns of data need to be populated.

Columns	Data	Indexes	Relationships	Constraints	Triggers	Partit
						
Drag a column header here to group by that column						
Column Name	Datatype	Key	Not Null	Def...		
BLK_ID	int	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			
BLK_NAME	nvarchar(32)	<input type="checkbox"/>	<input checked="" type="checkbox"/>			
BLK_DESC	nvarchar(80)	<input type="checkbox"/>	<input type="checkbox"/>			
BLK_XSIZ	real	<input type="checkbox"/>	<input checked="" type="checkbox"/>			
BLK_YSIZ	real	<input type="checkbox"/>	<input checked="" type="checkbox"/>			
BLK_ZSIZ	real	<input type="checkbox"/>	<input checked="" type="checkbox"/>			
LAY_ID	int	<input type="checkbox"/>	<input checked="" type="checkbox"/>			
BLT_ID	smallint	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(0)		
MAN_ID	int	<input type="checkbox"/>	<input type="checkbox"/>			
BLS_ID	smallint	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(0)		
BLI_ID	smallint	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(7)		
LVL_ID	int	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(3)		
UNT_ID	int	<input type="checkbox"/>	<input checked="" type="checkbox"/>			
DIR_ID	int	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(3)		
SIZ_ID	int	<input type="checkbox"/>	<input type="checkbox"/>			
CTG_ID	int	<input type="checkbox"/>	<input type="checkbox"/>			
SCH_ID	int	<input type="checkbox"/>	<input type="checkbox"/>			
ICO_ID	int	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(1)		
BLK_ORIENTATION	real	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(270)		
BLK_MOUNTING	smallint	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(0)		
BLK_GRAPHICS	smallint	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(0)		

Note: The above screen shot only shows part of the Block Definition (AVTTB_BLOCK_DEFINITION table).

All fields marked as not-null, need to be populated (either directly or by means of a default). In addition, many nullable fields may require populating - for example the Block Description (BLK_DESC) field.

Note: Not Null fields that have assigned default values may not need to be populated as the default value will be adopted in the case of no value being directly input.

Some fields will be populated directly in this table, and some fields will be read from other tables. Accordingly, as the required input information is listed, it will be necessary to identify which parent table the information is input into.

Field	Purpose	Data Type	Not Null	Default	Parent table	Form
BLK_ID	Block ID (Primary key)	Integer	Yes	None	N/A	Look up ID
BLK_NAME	Block Name	Nvarchar	Yes	None	N/A	User Input
BLK_DESC	Block Description	Nvarchar	No	None	N/A	User Input

Field	Purpose	Data Type	Not Null	Default	Parent table	Form
BLK_XSIZ	Block Length	Real	Yes	None	N/A	User Input
BLK_YSIZ	Block Depth	Real	Yes	None	N/A	User Input
BLK_ZSIZ	Block Height	Real	Yes	None	N/A	User Input
LAY_ID	Parent AutoCAD layer	Integer	Yes	None	AVTTB_L AYER_AL IAS	User Input /look-up
BLK_TYP_ID	Block type	Small Int	Yes	0	AVTTB_B LOCK_TY PE	User Input /look-up
BLS_ID	Block Shape	Small Int	Yes	0	AVTTB_B LK_SHAP E	User Input /look-up
BLI_ID	Block Insertion Point	Small Int	Yes	0	AVTTB_B LK_INSE RTION	User Input /look-up
LVL_ID	Block Level	Int	Yes	3	AVTTB_L EVELTYP E	User Input /look-up
UNIT_ID	Units	Int	Yes	None	AVTTB_U NIT	User Input /look-up
DIR_ID	Directory	Int	Yes	3	AVTTB_D IRECTOR Y	User Input /look-up
SIZ_ID	Size Group	Int	No	None	AVTTB_SI ZE	User Input /look-up
STA_ID	Status	Int	Yes	12	AVTTB_S TATUS	User Input /look-up
BLK_CREATED	Date block Created	Datetime	Yes	None	N/A	Date Option
BLK_UPDATED	Date block updated	Datetime	Yes	None	N/A	Date Option
BLK_CREATED_BY	User who Created Block	Nvarchar	Yes	None	N/A	User Option
BLK_UPDATED_BY	User who updated block	Nvarchar	Yes	None	N/A	User Option
BLK_CODE	Block Code	Nvarchar	No	None	N/A	User Option

Reviewing the Block-Group Link Table

The Block-Group Link table (AVTTB_BLOCK_GROUP_LINK) should be reviewed to establish which columns of data need to be populated.

Column Name	Datatype	Key	Not Null	Default
BLG_ID	int	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
BLK_ID	int	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

All fields marked as not-null need to be populated.

Both fields will be read from other tables. Accordingly, as the required input information is listed, it will be necessary to identify which parent table the information is input into.

Field	Purpose	Data Type	Not Null	Default	Parent table	Form
BLK_ID	Block ID	Int	Yes	No	AVTTB_BLOCK_DEFINITION	User Input /look-up
BLG_ID	Fixture Group ID	Int	Yes	No	AVTTB_BLOCK_GROUP	User Input /look-up

Populating this table will require two lookups: one in the AVTTB_BLOCK_DEFINITION table and one in the AVTTB_BLOCK_GROUP table.

BLK_ID

This look up is defined for the AVTTB_BLOCK_DESCRIPTION TABLE

ID	<input type="text" value="28"/>
Name	<input type="text" value="Block ID - PK"/>
ID Field Name	<input type="text" value="BLK_ID"/>
Code Field Name	<input type="text" value="BLK_NAME"/>
Table Name / SQL	<input type="text" value="AVTTB_BLOCK_DEFINITION"/>

The input from the .csv file will be the name of a Block [Fixture] (BLK_Name), and the look-up will return the Block ID (BLK_ID) assigned to that block in the database.

BLG_ID

This look up is defined for the AVTTB_BLOCK_GROUP table.

The input from the .csv file will be the name of a Block [Fixture] Group (BLG_DESC), and the look-up will return the Block Group ID (BLG_ID) assigned to that block group in the database.

Reviewing the Fixture Info Table

The **Fixture Info Definition** table (AVTTB_FIXTURE_INFO) should be reviewed to establish which columns of data need to be populated.

Column Name	Datatype	Key	Not Null	Default
BLK_ID	int	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
FXI_LIP_HEIGHT	real	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(0)
FXI_SLOT_SPACING	real	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(1)
FXI_FIRST_SLOT_NUMBER	real	<input type="checkbox"/>	<input checked="" type="checkbox"/>	((0))
FXI_MEASURE_FROM_BOTTOM	bit	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(1)
FXI_INCLUDE_FIRST_SHELF	bit	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(0)
FXI_TIERAGE	smallint	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(0)
FXI_VERTICAL_CATEGORY	smallint	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(0)
FXI_NOMINAL_LENGTH	real	<input type="checkbox"/>	<input type="checkbox"/>	
FXI_NOMINAL_AREA	real	<input type="checkbox"/>	<input type="checkbox"/>	
FXI_NOMINAL_HEIGHT	real	<input type="checkbox"/>	<input type="checkbox"/>	
FXI_NOMINAL_DEPTH	real	<input type="checkbox"/>	<input type="checkbox"/>	

All fields marked as not-null need to be populated. In addition, some nullable fields may require populating - for example the Nominal Length (FXI_NOMINAL_LENGTH) field.

Note: Not Null fields that have assigned default values may not need to be populated as the default value will be adopted in the case of no value being directly input.

Some fields will be populated directly in this table, and some fields will be read from other tables. Accordingly, as the required input information is listed, it will be necessary to identify which parent table the information is input into.

Field	Purpose	Data Type	Not Null	Default	Parent table	Form
BLK_ID	Block ID	Int	Yes	No	AVTTB_BLOCK_DEFINITION	User Input /look-up
FXI_NOMINAL_LENGTH	Nominal Length	Real	No	No	N/A	User Input
FXI_NOMINAL_HEIGHT	Nominal Height	Real	No	No	N/A	User Input
FXI_NOMINAL DEPTH	Nominal Depth	Real	No	No	N/A	User Input

BLK_ID

This look up is defined for the AVTTB_BLOCK_DESCRIPTION TABLE

The input from the .csv file will be the name of a Block (Fixture), and the look-up will return the Block ID (BLK_ID) assigned to that block in the database.

Reviewing the Style-Block Link Table

The Style-Block Link table (AVTTB_STYLE_BLOCK_LINK) should be reviewed to establish which columns of data need to be populated.

Column Na...	Datatype	Key	Not Null	Default
STY_ID	int	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
BLK_ID	int	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
SBL_RANKING	real	<input type="checkbox"/>	<input checked="" type="checkbox"/>	

All fields marked as not-null need to be populated.

Two of the three fields will be read from other tables. Accordingly, as the required input information is listed, it will be necessary to identify which parent table the information is input into.

Field	Purpose	Data Type	Not Null	Default	Parent table	Form
STY_ID	Style ID	Int	Yes	No	AVTTB_STYLE	User Input /look-up
BLK_ID	Block ID	Int	Yes	No	AVTTB_BLOCK_DEFINITI ON	User Input /look-up
SBL_RANKIN G	Style Block Link Ranking	Real	Yes	No	N/A	User Input

Populating this table will require two lookups: one in the AVTTB_STYLE table and one in the AVTTB_BLOCK_DEFINITION table.

It will also require information to be input for the Style Block Link Ranking.


STY_ID

This look up is defined for the AVTTB_STYLE table.

The input from the .csv file will be the name of a Style (STY_NAME), and the look-up will return the Style ID (STY_ID) assigned to that Style in the database. More Info

BLK_ID


This look up is defined for the AVTTB_BLOCK_DESCRIPTION table.

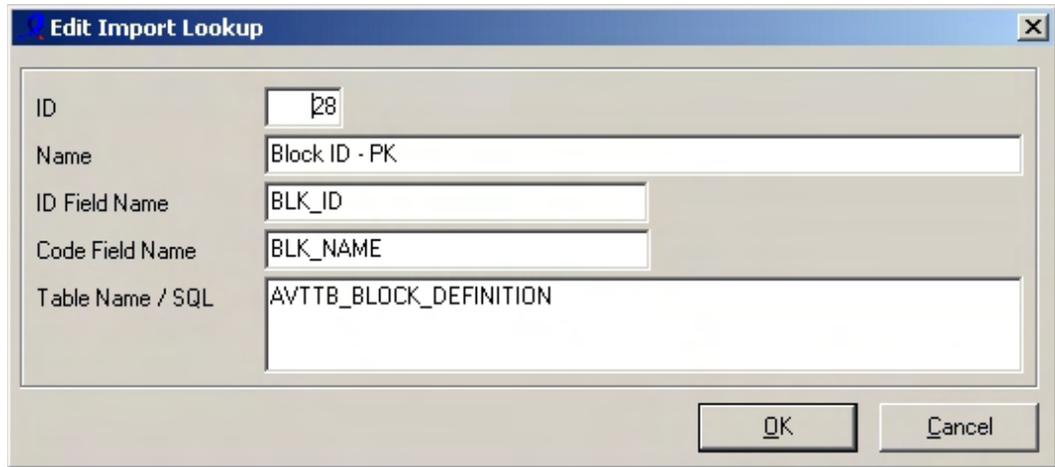

The input from the .csv file will be the name of a Block (Fixture), and the look-up will return the Block ID (BLK_ID) assigned to that block in the database.

Fixtures and Styles in the Schema

The need to **look up a Style ID** provides a good example of why the schema needs to be understood in detail.

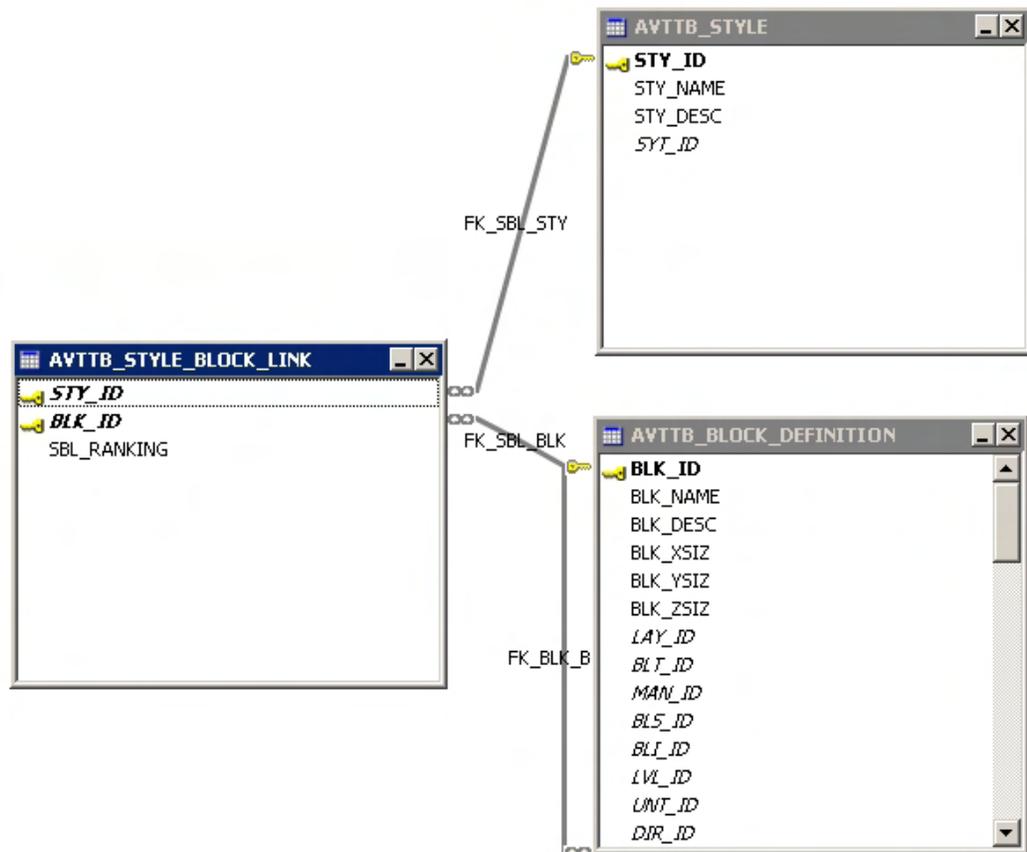

We need to add a Style ID (STY_ID) to the AVTTB_STYLE_BLOCK_LINK table. We will know the Style Name, and need to perform a Lookup on the AVTTB_STYLE table in order to return the value of the Style ID (STY_ID).

The AVTTB_STYLE database will not be changed in any way - just used as a source of information to populate the AVTTB_STYLE_BLOCK_LINK table.

Without this level of knowledge, we cannot populate the database with the correct values.

Reviewing the Block UDA Table

The **Block UDA table (AVTTB_BLOCK_UDA)** holds information on the User Defined Attributes assigned to each block. It should be reviewed to establish which columns of data need to be populated.

Column Name	Datatype	Key	Not Null	Default
BLK_ID	int	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
BRU_VALUE1	nvarchar(32)	<input type="checkbox"/>	<input type="checkbox"/>	
BRU_VALUE2	nvarchar(32)	<input type="checkbox"/>	<input type="checkbox"/>	
BRU_VALUE3	nvarchar(32)	<input type="checkbox"/>	<input type="checkbox"/>	
BRU_VALUE4	nvarchar(32)	<input type="checkbox"/>	<input type="checkbox"/>	
BRU_VALUE5	nvarchar(32)	<input type="checkbox"/>	<input type="checkbox"/>	
BRU_VALUE6	nvarchar(32)	<input type="checkbox"/>	<input type="checkbox"/>	
BRU_VALUE7	nvarchar(32)	<input type="checkbox"/>	<input type="checkbox"/>	
BRU_VALUE8	nvarchar(32)	<input type="checkbox"/>	<input type="checkbox"/>	
BRU_VALUE9	nvarchar(32)	<input type="checkbox"/>	<input type="checkbox"/>	
BRU_VALUE10	nvarchar(32)	<input type="checkbox"/>	<input type="checkbox"/>	

The BLK_ID field marked as not-null needs to be populated.

In additional, some nullable fields may require populating. This will depend on whether the specific UDA fields have been designated as mandatory when they were configured. This is quickly established by looking at the data in the AVTTB_UDA_TEMPLATE TABLE.

UDT_ID	UDT_NAME	UDT_TYPE	DAT_ID	UDT_MANDATORY	UDT_SEQUENCE
1	Purpose	0	0	<input checked="" type="checkbox"/>	1
2	Departments	0	0	<input type="checkbox"/>	2
3	Phased out in year:	0	1	<input type="checkbox"/>	3
4	Manager	3	0	<input type="checkbox"/>	1

UDT_TYPE type is Blocks (AVTTB_DATATYPE table). 'Purpose' is mandatory, while 'Departments' and 'Phased out in year:' are optional.

The Data Type (DAT_ID) is found in the Data Type table (AVTTB_DATATYPE): type 0 is string for example.

The UDT Sequence describes the sequence the columns will be populated in the AVTTB_BLOCKS_UDA table: 1 populating column one, etc.

The Block ID (BLK_ID) will be read from another table (AVTTB_BLOCK_DEFINITION) via a look up.

Field	Purpose	Data Type	Not Null	Default	Parent table	Form
BLK_ID	Block ID	Int	Yes	No	AVTTB_BLOCK_DEFINITION	User Input /look-up
BRU_Value1	Purpose	Text	Yes	No	N/A	User Input
BRU_Value2	Department	Text	No	No	N/A	User Input
BRU_Value3	Phased out in Year:	Integer	No	No	N/A	User Input

The Capture Spreadsheet


The Data Import Spreadsheet - Design

Before creating the Data Import spreadsheet, its **design** must be considered.

As errors in entering data into the spreadsheet, and errors extracting data from it, can lead to errors in importing data into the database, it is useful to design the spreadsheet in such a way that the possibility of error is minimized. There are several ways of achieving this:

1. Labeling the spreadsheet columns clearly
2. Numbering the spreadsheet columns
3. Listing the tables and required fields
4. Using lookups
5. Validating Data input

Labeling the spreadsheet columns clearly

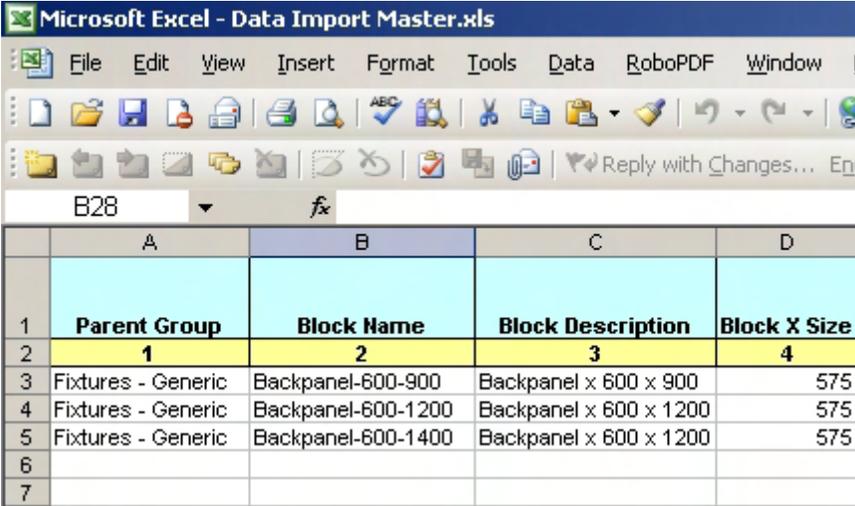

	A	B	C	D
1	Parent Group	Block Name	Block Description	Block X Size
2	1	2	3	4
3	Fixtures - Generic	Backpanel-600-900	Backpanel x 600 x 900	575
4	Fixtures - Generic	Backpanel-600-1200	Backpanel x 600 x 1200	575
5	Fixtures - Generic	Backpanel-600-1400	Backpanel x 600 x 1200	575
6				
7				

Column 1 of the spreadsheet can be read in during configuring data import. Clearly labeling the columns will make it easy to see the correct data is being selected during configuration.

Numbering the spreadsheet columns

In a large spreadsheet, it may be difficult to easily identify the correct column to reference. One way of overcoming this is to number the second row.

R	S	T	U	V
Style ID 2	Style Block Link Ranking 2	UDA Sequence	UDA-1: Purpose	UDA-2: Departments
18	19	20	21	22
Slatwall		2	1 Racking	Audio, Electrical
Slatwall		2	1 Racking	Audio, Electrical
Slatwall		2	1 Racking	Audio, Electrical

In the above example, we can see if we want information for UDA-2, we require column 22.

Listing the tables and required fields

It is helpful to list the required tables and fields in a worksheet within the Data Import spreadsheet.

13				
14	TABLE INFORMATION			
15	TABLE		FIELD	COMMENT
16				
17	AVTTB_BLOCK_GROUP_LINK		BLG_ID	Primary/Foreign Key
18			BLK_ID	Primary/Foreign Key
19				
20				
21	AVTTB_BLOCK_DEFINITION		BLK_ID	Primary Key
22			BLK_NAME	
23			BLK_DESC	
24			BLK_XSIZ	
25			BLK_YSIZ	
26			BLK_ZSIZ	
27			LAY_ID	
28			BLT_ID	
29			MAN_ID	
30			BLS_ID	
31			BLI_ID	

Here, the required tables and fields are identified. Fields that are primary keys are identified, while non-nullable fields are in Bold.

Listing data in this manner will also help if the configuration has to be altered at some point in the future.

Using lookups

It is sometimes useful to restrict the data that a user can enter to specific values. One way of restricting such values is by using lookups.

Data can be entered in a list on one worksheet within the spreadsheet - in the example below lists of values appropriate to entering Fixture information are entered.


	A	B	C	D
1	LOOKUPS			
2	Parent Group	Layer ID	Block Type	Block Shape
3				
4	Fixtures - Generic	Fixtures	Fixture	Rectangular
5	Fixtures- Lozier	Fittings	Fitting	Circular
6	Fittings - Generic	Shelves	Shelf	Semi-Circular
7	Fittings - Lozier			Triangular
8	Shelves - Generic			
9	Shelves - Lozier			
10				

Input in the section of the spreadsheet used for importing data can then be restricted to those values defined in the look ups, only allowing the user to choose valid options.

	A	B	C
1	Parent Group	Block Name	Block Description
2	1	2	3
3	Fixtures - Generic	Backpanel-600-900	Backpanel x 600 x 900
4	Fixtures - Generic	Backpanel-600-1200	Backpanel x 600 x 1200
5	Fixtures - Generic	Backpanel-600-1400	Backpanel x 600 x 1200
6	<input type="text"/>		
7	Fixtures - Generic		
8	Fixtures - Lozier		
9	Fittings - Generic		
10	Fittings - Lozier		
11	Shelves - Generic		
12	Shelves - Lozier		

Validating Data Input

As well as restricting data to that contained in lookups, it is also possible to restrict data in other ways using data validation.

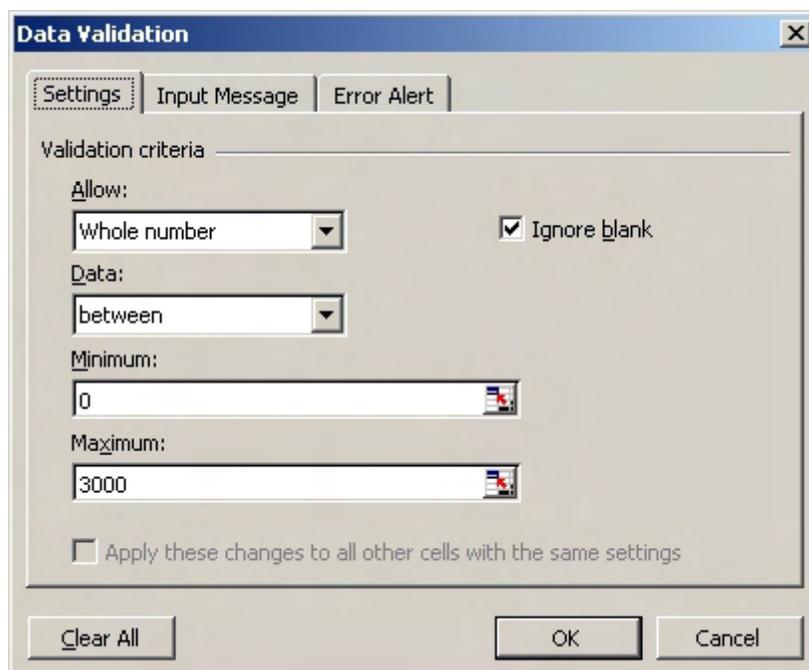

In the above example, data has been restricted to whole numbers between 0 - 3000. This would be useful in restricting (for example) dimensions to integers between specified values.

The Data Import Spreadsheet - Defining

The Data Import spreadsheet can then be set up.

	A	B	C	D	E	F	G	H
1	Parent Group	Block Name	Block Description	Block X Size	Block Y Size	Block Z Size	Layer ID	Block Type
2	1	2	3	4	5	6	7	8
3	Fixtures - Generic	Backpanel-600-900	Backpanel x 600 x 900	575	3	950	Fixtures	Fixture
4	Fixtures - Generic	Backpanel-600-1200	Backpanel x 600 x 1200	575	3	1200	Fixtures	Fixture
5	Fixtures - Generic	Backpanel-600-1400	Backpanel x 600 x 1200	575	3	1400	Fixtures	Fixture
6	Fixtures - Generic	Backpanel-600-1700	Backpanel x 600 x 1700	575	3	1700	Fixtures	Fixture
7	Fixtures - Generic	Backpanel-900-900	Backpanel x 900 x 900	875	3	9	Fixtures	Fixture
8	Fixtures - Generic	Backpanel-900-1200	Backpanel x 900 x 1200	875	3	12	Fixtures	Fixture
9	Fixtures - Generic	Backpanel-900-1400	Backpanel x 900 x 1200	875	3	1400	Fixtures	Fixture
10	Fixtures - Generic	Backpanel-900-1700	Backpanel x 900 x 1700	875	3	1700	Fixtures	Fixture
11								

The spreadsheet above has been set up with clear column names, and these column names have been arranged in sequence. For example, the earlier columns are for the Block Definition table, with columns associated with the Fixture Attribute come later.

The columns are sequentially numbered to assist in identifying them. This will assist during configuring the import.

Look-ups have been used to restrict data entry in a number of columns - for example the layer ID column is restricted to Fixtures, Fittings and Shelves.

Data entry has also been restricted in other columns. For example the block name column has been restricted to a text length of 32 characters (as per the database), while the X, Y and Z Block Size columns have been restricted to integers between the range 0 - 3000.

Note: While these measures will not prevent errors in entering data into the spreadsheet, they can substantially cut down on the incidence.

Adding the Fixture Import Definitions

Adding the Import Definitions

Note: This import will not be covered in as much detail as the Fixture Hierarchy - only screen shots illustrating new facets of Import definitions will be discussed.

Five import definitions are required.

	Description	Table Name	Group	Field Name	Field Size	Data Type	Lookup	Default	Sequence
1	Block ID	AVTTB_BLOCK_DEFINITION	1	BLK_ID	0	Double			0
2	Block Name	AVTTB_BLOCK_DEFINITION	1	BLK_NAME	64	Text	Block ID - PK		2
3	Block Description	AVTTB_BLOCK_DEFINITION	1	BLK_DESC	160	Text			3
4	Block X Size	AVTTB_BLOCK_DEFINITION	1	BLK_XSIZ	0	Double			4
5	Block Y Size	AVTTB_BLOCK_DEFINITION	1	BLK_YSIZ	0	Double			5
6	Block Z Size	AVTTB_BLOCK_DEFINITION	1	BLK_ZSIZ	0	Double			6
7	Block Layer	AVTTB_BLOCK_DEFINITION	1	LAY_ID	0	Double	Layer ID		7
8	Block Type	AVTTB_BLOCK_DEFINITION	1	BLT_ID	0	Double	Block Type - PK		8
9	Block Shape	AVTTB_BLOCK_DEFINITION	1	BLS_ID	0	Double	Block Shape - ID		9
10	Block Insertion Point	AVTTB_BLOCK_DEFINITION	1	BLI_ID	0	Double			10
11	Block Level	AVTTB_BLOCK_DEFINITION	1	BLV_ID	0	Double	Level		11

Block Definition will populate the Block Definitions table (AVTTB_BLOCK_DEFINITIONS) and link with the parent Fixture Group in the AVTTB_FIXTURE_BLOCK_LINK table.


Fixture Information will populate the AVTTB_FIXTURE_INFO table.

Style-1 and Style-2 will populate the AVTTB_STYLE_BLOCK LINK TABLE to define the required styles. We are entering two styles, and using two definitions to do so.

UDA Information will populate the AVTTB_BLOCK_UDA table.

Date Format

The **Date Format** has been set to MM/DD/YYYY.

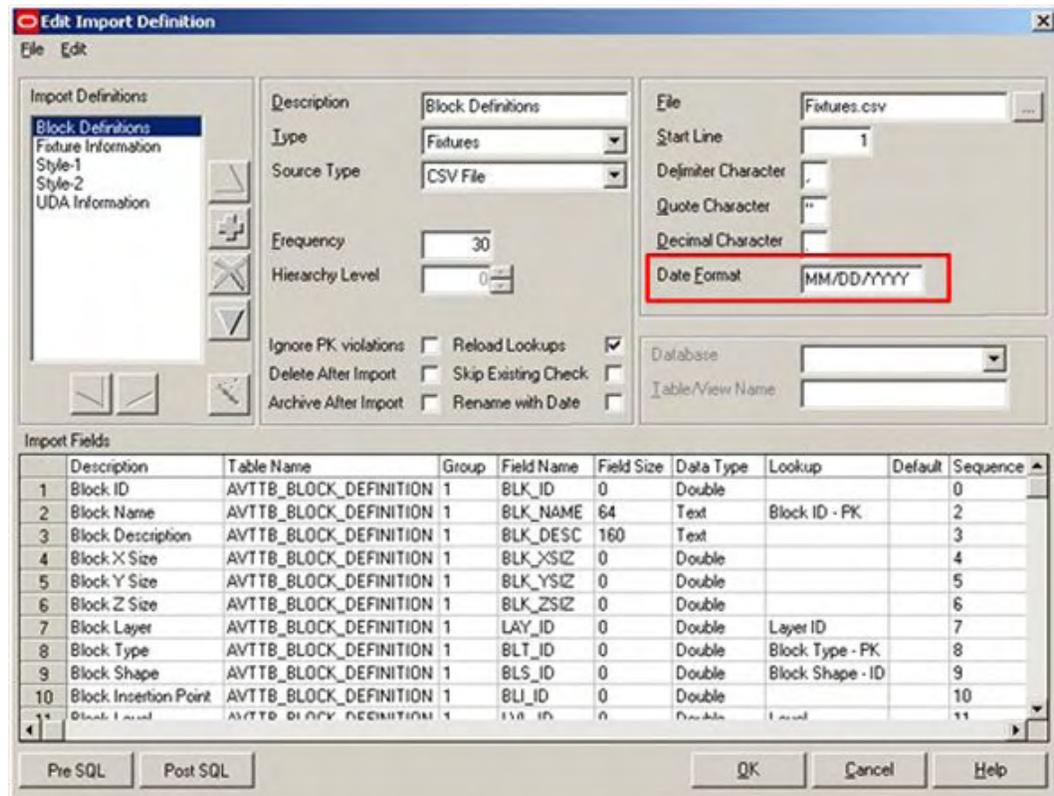

This is because we are importing date in the US format of Month//Day/Year.

Had we been importing UK dates, the DD/MM/YYYY format would have been required (Day/Month/Year).

Block Definitions

Adding to the AVTTB_BLOCK_DEFINITIONS table (and also adding to the AVTTB_BLOCK_GROUP_LINK table) is the largest import definition in this example.

Note: It would have been perfectly valid to update the AVTTB_BLOCK_GROUP_LINK table using a separate Import Definition - it has been included in this Import Definition to illustrate the use of Groups.

The AVTTB_BLOCK_DEFINITIONS table is a large one:

Column Name	Datatype	Key	Not Null	Def...
BLK_ID	int	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
BLK_NAME	nvarchar(32)	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
BLK_DESC	nvarchar(80)	<input type="checkbox"/>	<input type="checkbox"/>	
BLK_XSIZ	real	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
BLK_YSIZ	real	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
BLK_ZSIZ	real	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
LAY_ID	int	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
BLT_ID	smallint	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(0)
MAN_ID	int	<input type="checkbox"/>	<input type="checkbox"/>	
BLS_ID	smallint	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(0)
BLI_ID	smallint	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(7)
LVL_ID	int	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(3)
UNT_ID	int	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
DIR_ID	int	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(3)
SIZ_ID	int	<input type="checkbox"/>	<input type="checkbox"/>	
CTG_ID	int	<input type="checkbox"/>	<input type="checkbox"/>	
SCH_ID	int	<input type="checkbox"/>	<input type="checkbox"/>	
ICO_ID	int	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(1)
BLK_ORIENTATION	real	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(270)
BLK_MOUNTING	smallint	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(0)
BLK_GRAPHICS	smallint	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(0)


Note: The above screen shot only shows part of the Block Definition (AVTTB_BLOCK_DEFINITION table).

A significant number of fields in this table will be populated from the spreadsheet, both nullable and non-nullable. Some non-nullable fields will be populated by means of their defaults and will not require importing via Data Importer.

The AVTTB_BLOCK_GROUP_LINK table is a smaller one.

Column Name	Datatype	Key	Not Null	Default
BLG_ID	int	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
BLK_ID	int	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	

It is then possible to set up the Import Fields:

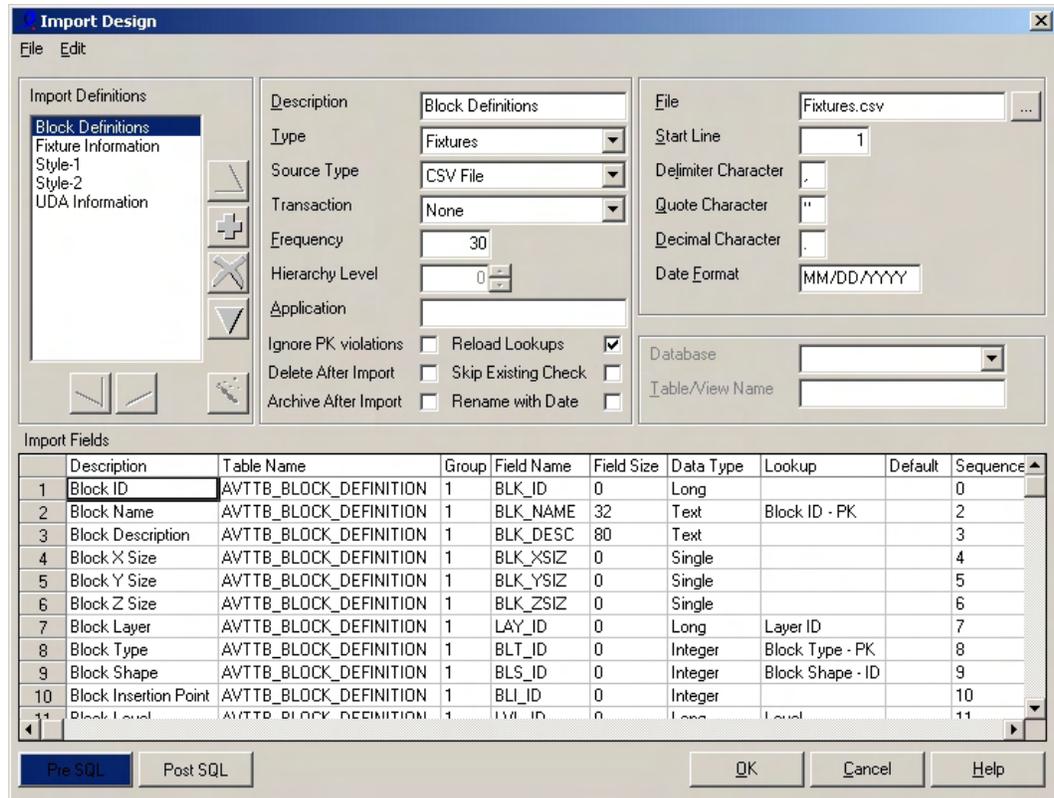

There are 21 Import fields to be defined - some of which provide illustrations of how to correctly use Data Importer.

These are discussed in the next few topics.

Configuring the Import Definition - Using SQL in the Lookup

There are several points of interest in the Block Definition Import Definition. One of these is in the Block Status Import Field.

Import Field

Sample Line: Parent Group,Block Name,Block Description,Block X Size,Block Y Size,Block Z Size,Layer ID,Block Type,Block Shape,Block S...

Description: Block Status
 Table Name: AVTTB_BLOCK_DEFINITION
 Field Name: STA_ID
 Data Type: Double
 Field Size: 0
 Group: 1

Value

Import Value
 Parent:
 Source Name:
 Sequence: 14
 Source Position: 0 Use Selected Text
 Source Size: 0
 Sample Value: Active

Lookup: Block Status ID
 Default:
 ID:
 Reference ID:
 User:
 Start Time:
 Now:
 Eternity:

Actions

Add
 Update
 Delete
 Warn if Truncating
 Error if Truncating
 Add to Lookup Cache
 Used to check if it Exists
 Skip record if field is empty
 Skip record if field is zero

Modifiers

Trim:
 Abbreviate:
 Uppercase:
 Lowercase:
 Prefix:
 Suffix:

OK Cancel Help

Lookup using SQL

One requirement is to look up the Status for the block and convert it to a Status ID (STA_ID).

Edit Import Lookup

ID: 26
 Name: Block Status ID
 ID Field Name: STA_ID
 Code Field Name: STA_DESC
 Table Name / SQL: AVTTB_STATUS WHERE STT_ID = 5

OK Cancel

The status will be read in from the .csv file as a text string - for example Current.

However, there are a number of status types so there may be several types of object that could have Current status.

Accordingly, statuses have been assigned to Status Types - found in the AVTTB_STATUS_TYPE table.

Columns		Data	Indexes	Relationships	Constraints	T
Y						
Drag a column header here to group by that column						
STT_ID	STT_DESC					
0	Store					
1	Floor					
2	Revision					
3	Section					
4	SectionOption					
5	Block					
6	Planogram					
7	File					
8	Product					
9	Report					

We can see blocks have been assigned a Status Type (STT_ID) of 5.

Looking at the AVTTB_STATUS table shows us that there are indeed several objects that can have a Current status assigned to them.

Columns		Data	Indexes	Relationships	Constraints	Triggers	Partitions	T
Y								
Drag a column header here to group by that column								
STA_ID	STL_ID	STT_ID	STA_DESC	▲	STA_ORDER	ST		
27	2	8	Active		2			
52	2	9	Active		2			
22	4	2	Authorised		2			
25	4	7	Authorised		2			
15	3	0	Closed		4			
16	3	1	Closed		3			
9	2	2	Current		3			
10	2	3	Current		3			
12	2	5	Current		2			
13	2	6	Current		3			
14	2	7	Current		3			
18	3	3	Deleted		4			
17	3	2	Historical		4			
19	3	4	Historical		4			
24	3	7	Historical		4			
20	3	5	Old		3			
53	3	9	Old		3			
7	2	0	Open		2			

Accordingly, the Lookup looks in the AVTTB_STATUS table WHERE STT_ID = 5 and returns the appropriate Status ID (STA_ID).

This restricts the lookup to statuses associated with blocks, and prevents the lookup returning values associated with other objects such as Floors or Files.

Configuring the Import Definition - Using Dates

Using Dates requires some care.

The screenshot shows the 'Import Field' dialog box with the following configuration:

- Sample Line:** Parent Group,Block Name,Block Description,Block X Size,Block Y Size,Block Z Size,Layer ID,Block Type,Block Shape,Block S...
- Description:** Block Created
- Table Name:** AVTTB_BLOCK_DEFINITION
- Field Name:** BLK_CREATED
- Data Type:** Date
- Field Size:** 0
- Group:** 1
- Value:**
 - Import Value
 - Parent: [Dropdown]
 - Source Name: [Text]
 - Sequence: <None>
 - Source Position: 0 (Use Selected Text)
 - Source Size: 0
 - Sample Value: [Text]
 - Lookup: <None>
 - Default: [Text]
 - ID
 - Reference ID
 - User
 - Start Time
 - Now
 - Eternity
- Actions:**
 - Add
 - Update
 - Delete
 - Warn if Truncating
 - Error if Truncating
 - Add to Lookup Cache
 - Used to check if it Exists
 - Skip record if field is empty
 - Skip record if field is zero
- Modifiers:**
 - Trim
 - Abbreviate
 - Uppercase
 - Lowercase
 - Prefix: [Text]
 - Suffix: [Text]

In this example, we are adding a Block Created date (BLK_CREATED).

As it is the creation date, we only select the Add option. We do not wish this field to change if the record is updated, so the Update option is left unchecked.

The screenshot shows the 'Import Field' dialog box with the following configuration:


- Sample Line:** Parent Group,Block Name,Block Description,Block X Size,Block Y Size,Block Z Size,Layer ID,Block Type,Block Shape,Block S...
- Description:** Block Updated
- Table Name:** AVTTB_BLOCK_DEFINITION
- Field Name:** BLK_UPDATED
- Data Type:** Date
- Field Size:** 0
- Group:** 1
- Value:**
 - Import Value
 - Parent: [Dropdown]
 - Source Name: [Text]
 - Sequence: <None>
 - Source Position: 0 (Use Selected Text)
 - Source Size: 0
 - Sample Value: [Text]
 - Lookup: <None>
 - Default: [Text]
 - ID
 - Reference ID
 - User
 - Start Time
 - Now
 - Eternity
- Actions:**
 - Add
 - Update
 - Delete
 - Warn if Truncating
 - Error if Truncating
 - Add to Lookup Cache
 - Used to check if it Exists
 - Skip record if field is empty
 - Skip record if field is zero
- Modifiers:**
 - Trim
 - Abbreviate
 - Uppercase
 - Lowercase
 - Prefix: [Text]
 - Suffix: [Text]

For the Block Updated field (BLK_UPDATED) we would select both Add and Update. This is because if we are adding a new record, we wish the block to have the Block Updated field set to the same time as the Block Created field if the record is being added for the first time. If we are updating the record we wish the Block Updated field to be updated to the time the record was modified.

There are two options for time - Start Time and Now. Start Time will result in the record being given the date and time the import process started, now will result in the record being given the date and time the specific record was actually imported.

Configuring the Import Definition - Using Users


The name of the user importing the record can be appended to the record using the User option.

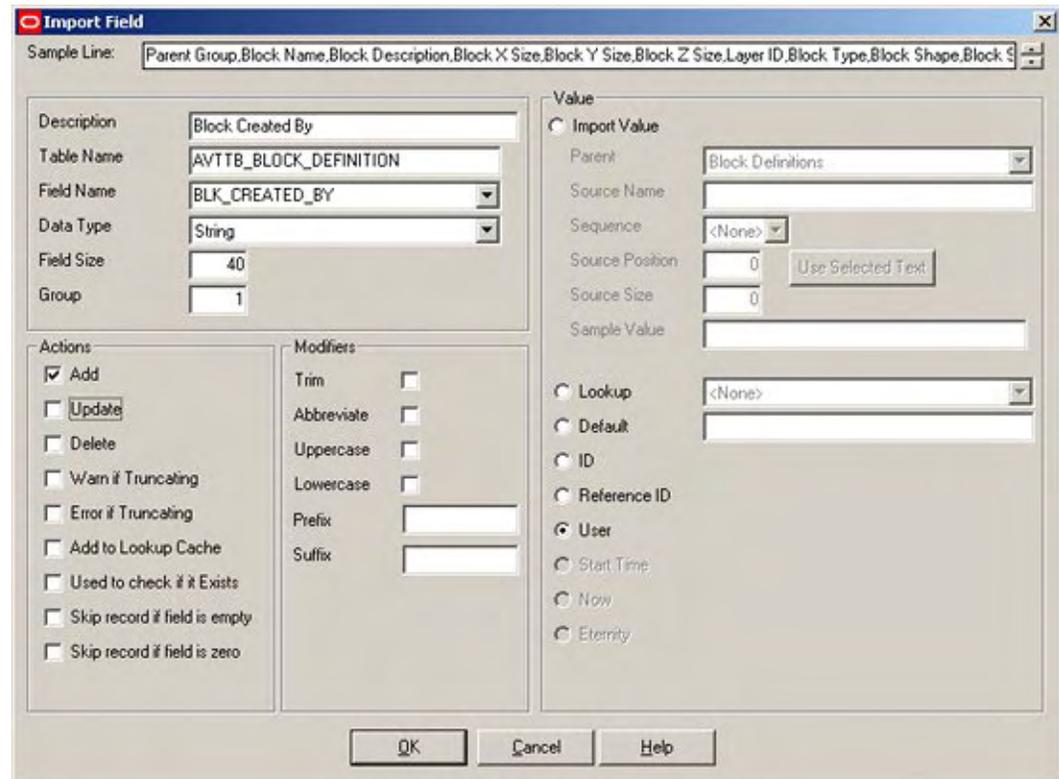

This will import the user name of the person carrying out the import into the pertinent table in the database.

Configuring the Import Definition - Using Groups

The **Block Definitions** Import definition provides an example of using Groups.

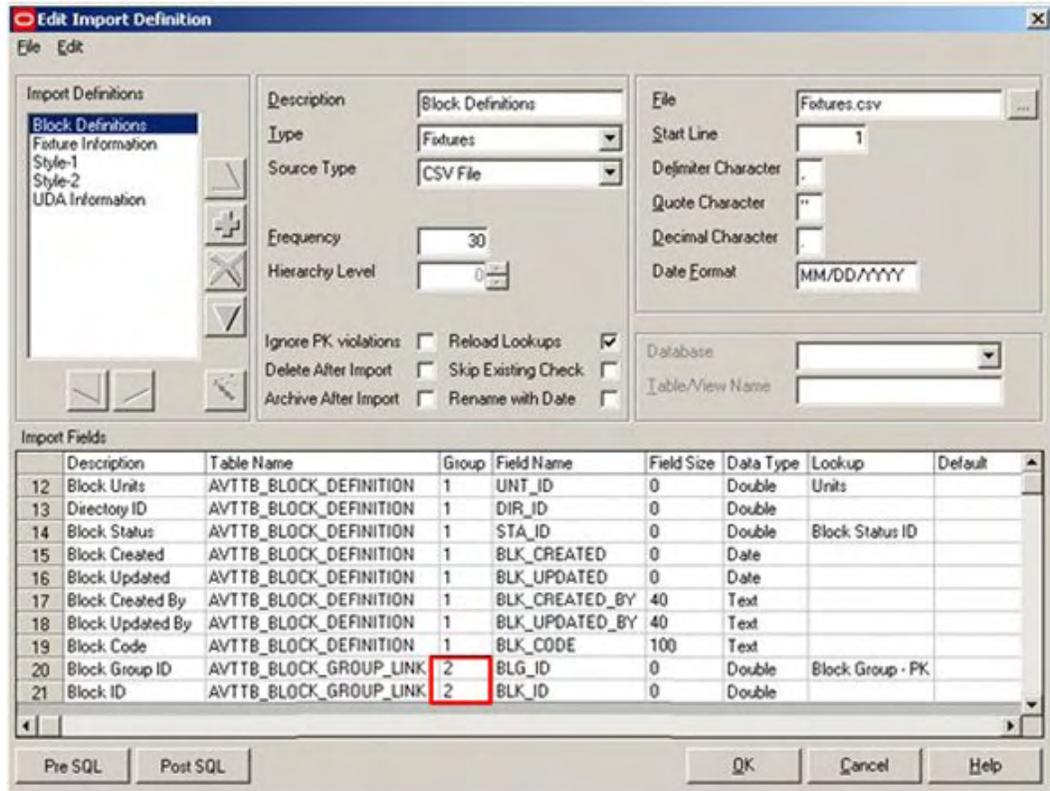

Towards the bottom of the list of definitions, the designated group has been changed from 1 to 2. This is because the table the data is being inserted into has changed from AVTTB_BLOCK_DEFINITION to AVTTB_BLOCK_GROUP_LINK - each table for which data is being inserted into within a particular Import Definition must be assigned to a specific group.

Data Importer works by creating SQL Update statements which are then run against the database.

Because data is to be inserted into two different tables, two different SQL Update statements will be produced. Using Groups ensures that each update statement contains the data pertinent to the table the data will be inserted into.

Example of Errors: An error was deliberately created by changing the Group for the Block Group ID from 2 to 1.

Data Importer then tried to insert the data into AVTTB_BLOCK_DEFINITION table (Group 1) rather than the AVTTB_BLOCK_GROUP_LINK table (group 2).

This produced the following error:



(Data Importer tried to insert data into a BLG_ID column in the AVTTB_BLOCK_DEFINITION table - and that column only exists in the AVTTB_BLOCK_GROUP_LINK table).

Configuring the Import Definition - Reference ID's


Reference ID's must be used when an ID has previously been looked up in a specific Import Definition.

In the example above we have previously used a lookup to convert a Block Name (BLK_NAME) into a Block ID (BLK_ID).

This information is already available in this definition and using the lookup for a second time within the Block Definitions import definition will cause an error.

(If it is necessary to use a lookup for Block name in another import definition [for example Fixture Information] then it may be used again for the first time in that import definition, with a Reference ID being required for the second time of use in that import definition).

Note: A typical error message that might result from using a lookup for the second time instead of a Reference ID might look as follows:

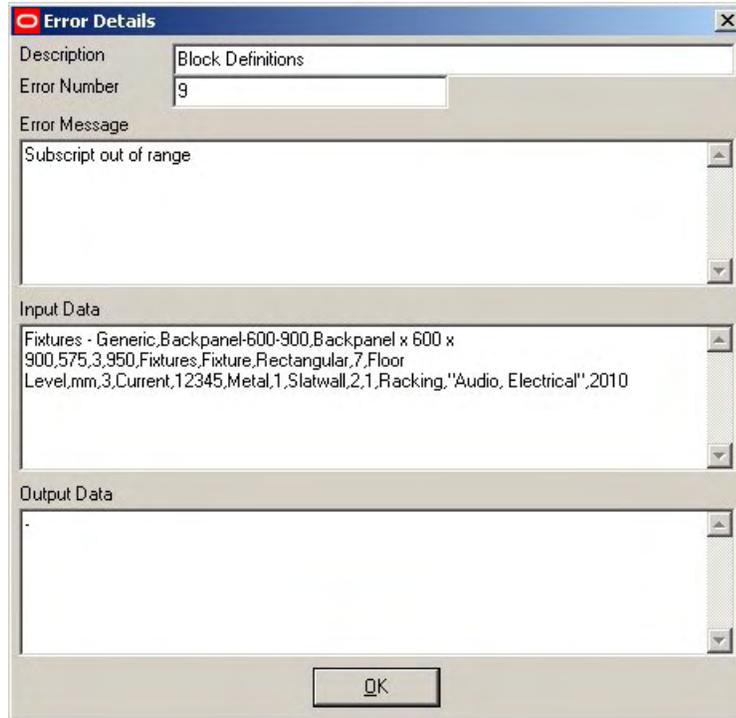


Fixture Information

There are a number of columns in the AVTTB_FIXTURE_INFO table:

Columns	Data	Indexes	Relationships	Constraints	Triggers	Partitions	Grants	Use
Drag a column header here to group by that column								
Column Name	Datatype	Key	Not Null	Default				
BLK_ID	int	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					
FXI_LIP_HEIGHT	real	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(0)				
FXI_SLOT_SPACING	real	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(1)				
FXI_FIRST_SLOT_NUMBER	real	<input type="checkbox"/>	<input checked="" type="checkbox"/>	((0))				
FXI_MEASURE_FROM_BOTTOM	bit	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(1)				
FXI_INCLUDE_FIRST_SHELF	bit	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(0)				
FXI_TIERAGE	smallint	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(0)				
FXI_VERTICAL_CATEGORY	smallint	<input type="checkbox"/>	<input checked="" type="checkbox"/>	(0)				
FXI_NOMINAL_LENGTH	real	<input type="checkbox"/>	<input type="checkbox"/>					
FXI_NOMINAL_AREA	real	<input type="checkbox"/>	<input type="checkbox"/>					
FXI_NOMINAL_HEIGHT	real	<input type="checkbox"/>	<input type="checkbox"/>					
FXI_NOMINAL_DEPTH	real	<input type="checkbox"/>	<input type="checkbox"/>					

However, Data Importer is only going to be used to insert values into four of them, the other columns having default values that will be used.

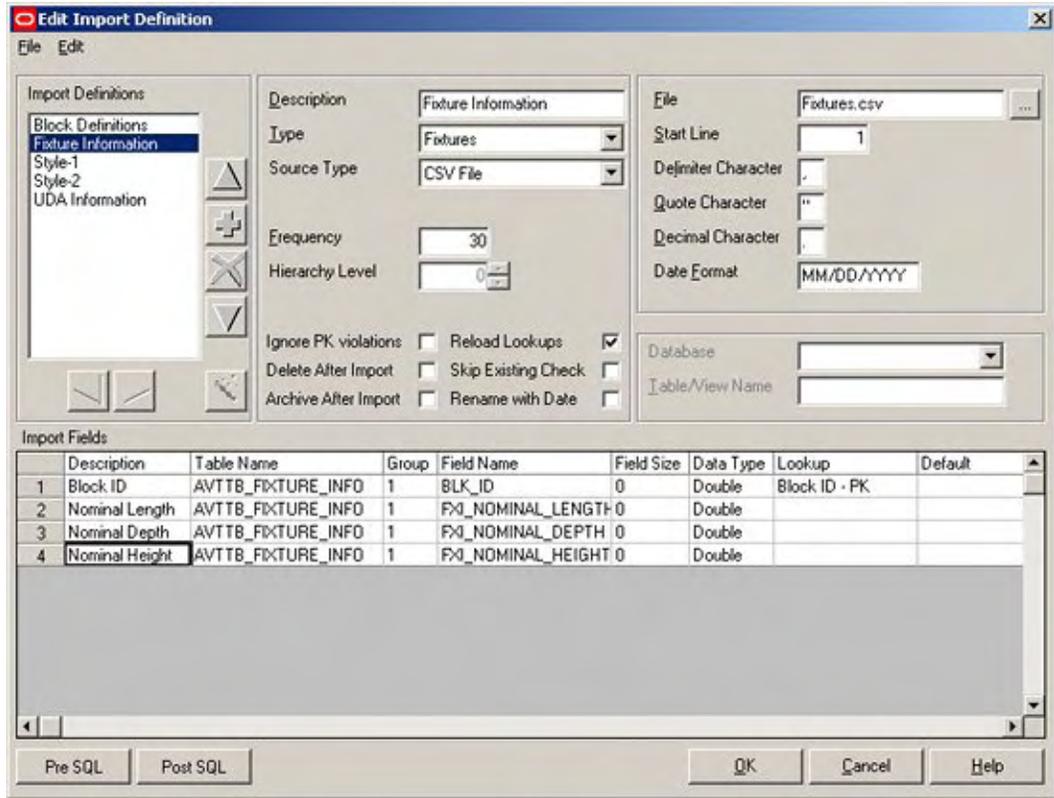

In this instance, it has been chosen to insert values from columns 4, 5 and 6, duplicating the actual dimensions.

Style Relationships

Adding **Styles** is relatively straight forward.

The **STYLE_BLOCK_LINK** table contains just three columns:


Column Na...	Datatype	Key	Not Null	Default
STY_ID	int	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
BLK_ID	int	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
SBL_RANKING	real	<input type="checkbox"/>	<input checked="" type="checkbox"/>	

However, it is possible to insert many styles for a specific fixture, each forming a record in the table.

The spreadsheet is configured to add two styles for each block (columns 16 - 19).

	A	B	O	P	Q	R	S
	Parent Group	Block Name	Block Code	Style ID 1	Style Block Link Ranking 1	Style ID 2	Style Block Link Ranking 2
	1	2	15	16	17	18	19
3	Fixtures - Generic	Backpanel-600-900	12345	Metal	1 Slatwall		2
4	Fixtures - Generic	Backpanel-600-1200	23456	Metal	1 Slatwall		2
5	Fixtures - Generic	Backpanel-600-1400	34567	Metal	1 Slatwall		2
6	Fixtures - Generic	Backpanel-600-1700	45678	Metal	1 Slatwall		2
7	Fixtures - Generic	Backpanel-900-900	56789	Metal	1 Slatwall		2
8	Fixtures - Generic	Backpanel-900-1200	67891	Metal	1 Slatwall		2
9	Fixtures - Generic	Backpanel-900-1400	78910	Metal	1 Slatwall		2
10	Fixtures - Generic	Backpanel-900-1700	89101	Metal	1 Slatwall		2

Because we are inserting two separate records for each fixture, we require two separate import definitions, Style-1 and Style-2.

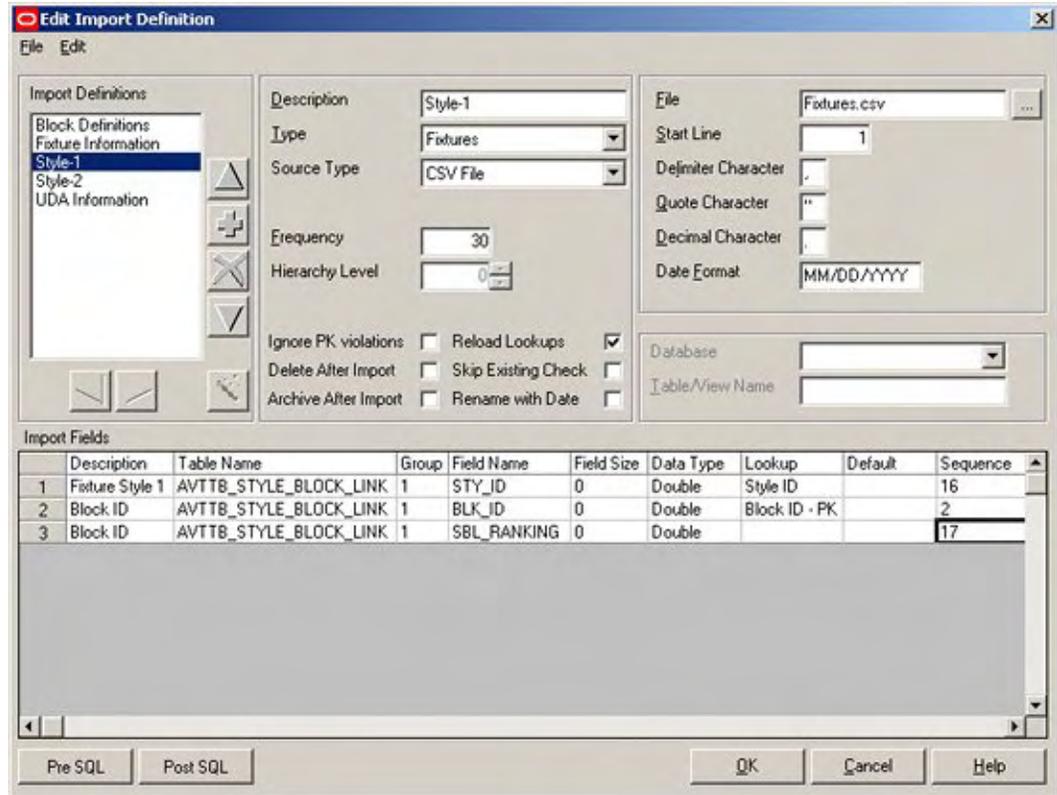

Each is straightforward, using a lookup to convert the block names and style names to their respective ID's, and bringing in a value from the spreadsheet.


Note: It is possible to set up the spreadsheet for many styles - say five per fixture.

Five separate Style import definitions could then be set up (Style-1, Style-2, Style-3, etc).

It would then be possible to use the Skip record if field is empty option in the Import Field definition to ignore records for fixtures with less than the maximum number of styles defined. For example, if a fixture only had the first three styles defined in the spreadsheet, Data Importer would skip importing Style-4 and Style-5.


UDA Information

The **UDA Definition** is straightforward for this example, containing just four Import fields. These will be used to insert information into the AVTTB_BLOCK_UDA table.

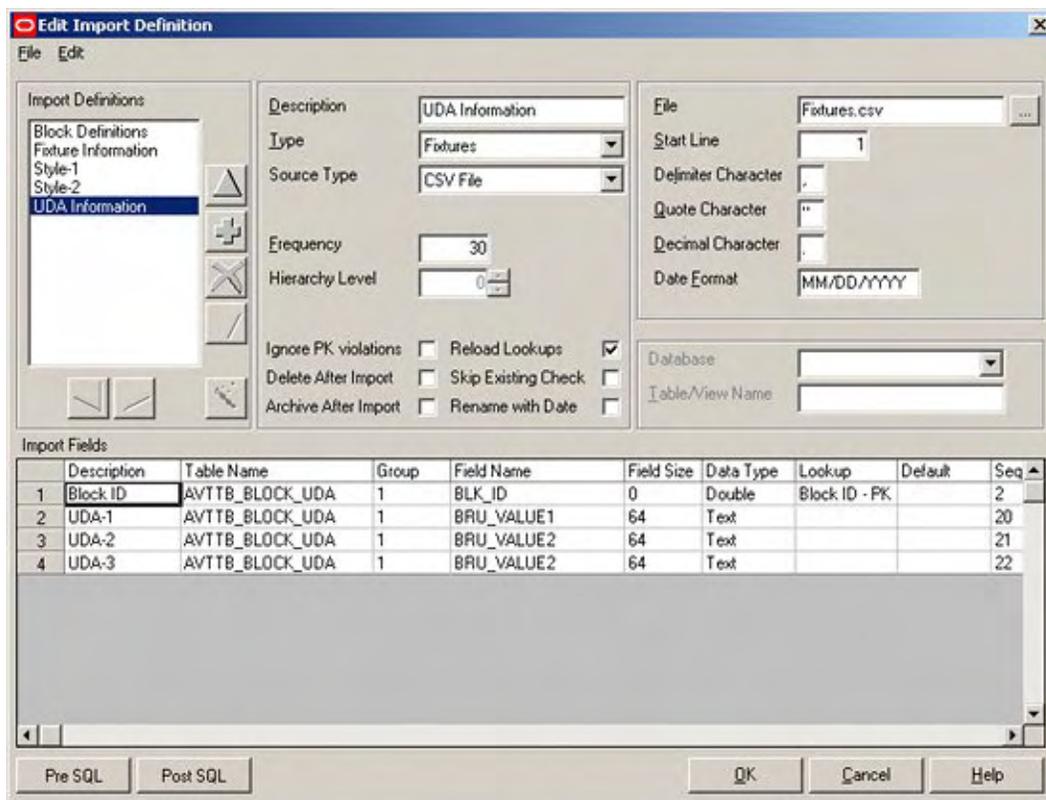

The first import field reads the Block Name from the 2nd column of the spreadsheet and converts it to a lookup to insert the Block ID (BLK_ID) into the AVTTB_BLOCK_UDA table.

The second, third and fourth import fields read data from columns 20, 21 and 22 of the spreadsheet and insert it into the appropriate fields in the AVTTB_BLOCK_UDA table (BRU_VALUE1, BRU_VALUE2 and BRU_VALUE3).

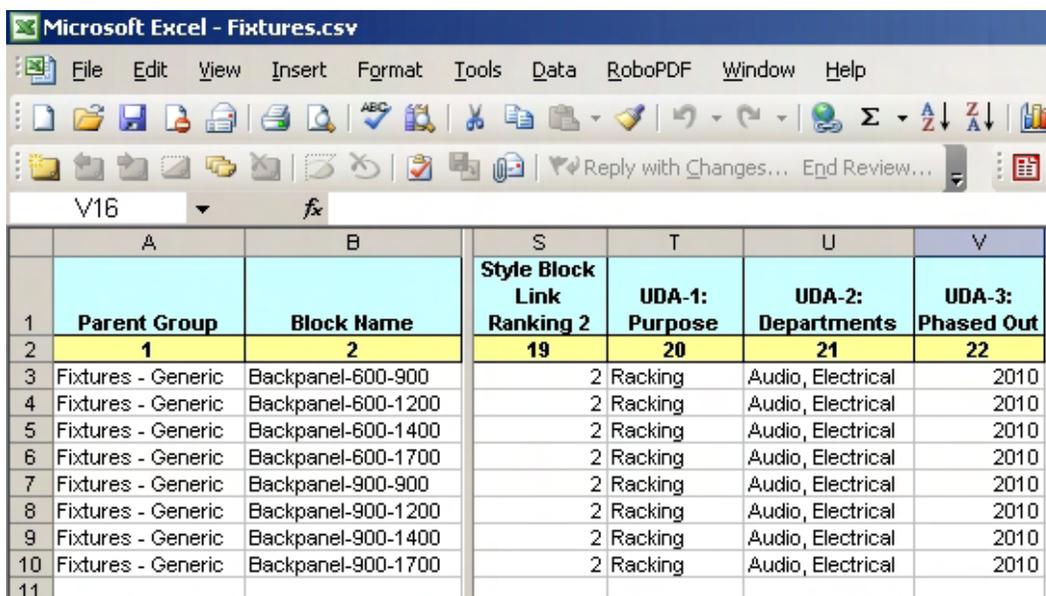


About Points to Watch

Points to Watch are commonly experienced problems in the use of Data Importer, and their solutions.

Important: It is important to save the CSV file in the format that is appropriate for the system it will be used on. If you do not save the CSV file in the format appropriate for the system you are working on, errors may result. For example, if you are working on a computer with the Windows operating System, and you want to use the file on that computer, it is important to save the file in the CSV (Windows) format. If however, you are using Windows and want to use the text file on a Macintosh computer, save the file in the CSV (Macintosh) format. If you are using a Macintosh computer and want to use the text file on a system running Windows or Windows NT, save the file in the CSV (Windows) format.

If the Start Line is incorrect, Data Importer will read the wrong data

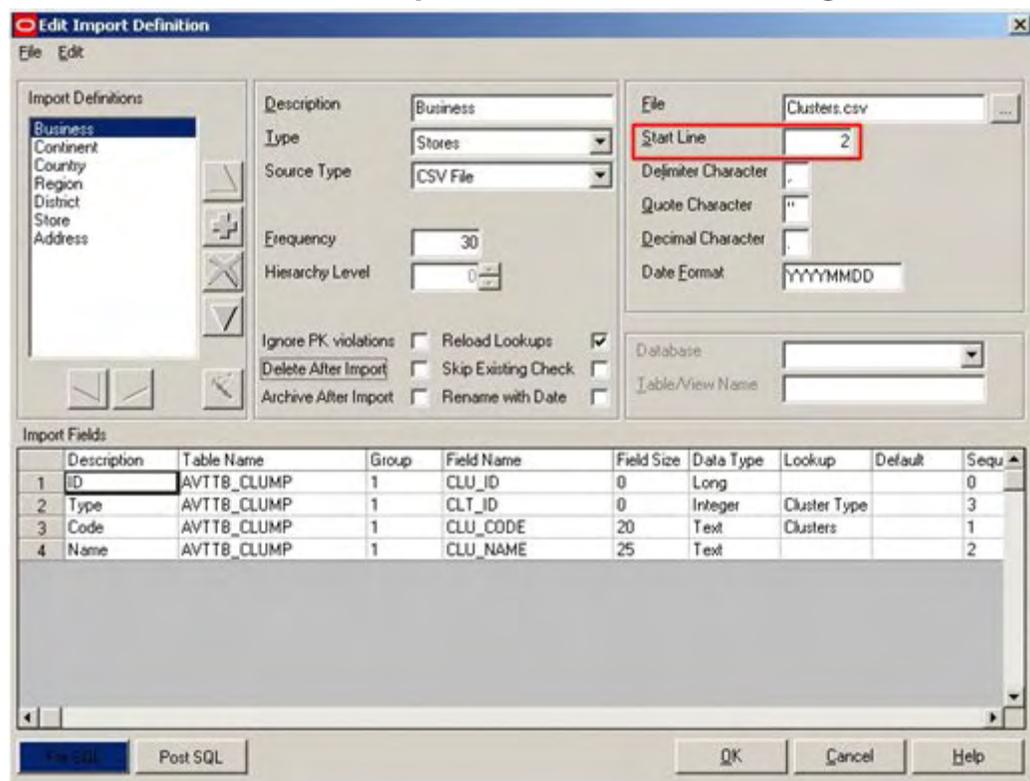

The start line will typically be set to 1 during configuring the data Import.

It should be set to where the first line of actual data is (typically 2 or 3) before data is imported into the database using data importer.

If the Start Line is incorrect, Data Importer will read the wrong data

If it is left at 1, errors will result as Data Importer reads in data incompatible with the database.