



# Sun™ Management Center 3.0 Platform Update 3 Software Release Notes

---

Sun Microsystems, Inc.  
901 San Antonio Road  
Palo Alto, CA 94303-4900 U.S.A.  
650-960-1300

Part No. 816-2262-10  
October 2001, Revision A

Copyright 2001 Sun Microsystems, Inc., 901 San Antonio Road • Palo Alto, CA 94303-4900 USA. Some preexisting portions Copyright 2001 Netscape Communications Corp. All rights reserved.

This product or document is protected by copyright and distributed under licenses restricting its use, copying, distribution, and decompilation. No part of this product or document may be reproduced in any form by any means without prior written authorization of Sun and its licensors, if any. Third-party software, including font technology, is copyrighted and licensed from Sun suppliers, including Halcyon Inc., Oracle Corporation, and Raima Corporation. This product includes software developed by the Apache Software Foundation.

Parts of the product may be derived from Berkeley BSD systems, licensed from the University of California. UNIX is a registered trademark in the U.S. and other countries, exclusively licensed through X/Open Company, Ltd. For Netscape Communicator™, the following notice applies: Copyright 1995 Netscape Communications Corporation. All rights reserved.

Sun, Sun Microsystems, the Sun logo, AnswerBook2, docs.sun.com, Sun Enterprise, Ultra, Sun Fire, Netra, and Solaris are trademarks, registered trademarks, or service marks of Sun Microsystems, Inc. in the U.S. and other countries. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. in the U.S. and other countries. Products bearing SPARC trademarks are based upon an architecture developed by Sun Microsystems, Inc. Netscape and the Netscape N logo are registered trademarks of Netscape Communications Corporation in the U.S. and other countries. Other Netscape logos, product names, and service names are also trademarks of Netscape Communications Corporation, which may be registered in other countries.

The OPEN LOOK and Sun™ Graphical User Interface was developed by Sun Microsystems, Inc. for its users and licensees. Sun acknowledges the pioneering efforts of Xerox in researching and developing the concept of visual or graphical user interfaces for the computer industry. Sun holds a non-exclusive license from Xerox to the Xerox Graphical User Interface, which license also covers Sun's licensees who implement OPEN LOOK GUIs and otherwise comply with Sun's written license agreements.

Federal Acquisitions: Commercial Software—Government Users Subject to Standard License Terms and Conditions.

DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID.

---

Copyright 2001 Sun Microsystems, Inc., 901 San Antonio Road • Palo Alto, CA 94303-4900 Etats-Unis. Pour certaines parties préexistantes Copyright 2001 Netscape Communications Corp. Tous droits réservés.

Ce produit ou document est protégé par un copyright et distribué avec des licences qui en restreignent l'utilisation, la copie, la distribution et la décompilation. Aucune partie de ce produit ou document ne peut être reproduite sous aucune forme, par quelque moyen que ce soit, sans l'autorisation préalable et écrite de Sun et de ses bailleurs de licence, s'il y en a. Le logiciel détenu par des tiers, et qui comprend la technologie relative aux polices de caractères, est protégé par un copyright et licencié par des fournisseurs de Sun, dont Halcyon Inc., Oracle Corporation et Raima Corporation. Ce produit comprend tous les logiciels développés par Apache Software Foundation.

Des parties de ce produit pourront être dérivées des systèmes Berkeley BSD licenciés par l'Université de Californie. UNIX est une marque déposée aux Etats-Unis et dans d'autres pays et licenciée exclusivement par X/Open Company, Ltd. La notice suivante est applicable à Netscape Communicator™: Copyright 1995 Netscape Communications Corporation. Tous droits réservés.

Sun, Sun Microsystems, the Sun logo, AnswerBook2, docs.sun.com, Sun Enterprise, Ultra, Sun Fire, Netra, et Solaris sont des marques de fabrique ou des marques déposées, ou marques de service, de Sun Microsystems, Inc. aux Etats-Unis et dans d'autres pays. Toutes les marques SPARC sont utilisées sous licence et sont des marques de fabrique ou des marques déposées de SPARC International, Inc. aux Etats-Unis et dans d'autres pays. Les produits portant les marques SPARC sont basés sur une architecture développée par Sun Microsystems, Inc. Netscape et le logo N de Netscape sont des marques déposées de Netscape Communications Corporation aux Etats-Unis et dans d'autres pays. Les autres logos, noms de produit et noms de service Netscape sont aussi des marques de commerce de Netscape Communications Corporation, qui peuvent être déposées dans d'autres pays.

L'interface d'utilisation graphique OPEN LOOK et Sun™ a été développée par Sun Microsystems, Inc. pour ses utilisateurs et licenciés. Sun reconnaît les efforts de pionniers de Xerox pour la recherche et le développement du concept des interfaces d'utilisation visuelle ou graphique pour l'industrie de l'informatique. Sun détient une licence non exclusive de Xerox sur l'interface d'utilisation graphique Xerox, cette licence couvrant également les licenciés de Sun qui mettent en place l'interface d'utilisation graphique OPEN LOOK et qui en outre se conforment aux licences écrites de Sun.

Achats fédéraux : logiciel commercial - Les utilisateurs gouvernementaux doivent respecter les conditions du contrat de licence standard.

LA DOCUMENTATION EST FOURNIE "EN L'ETAT" ET TOUTES AUTRES CONDITIONS, DECLARATIONS ET GARANTIES EXPRESSES OU TACITES SONT FORMELLEMENT EXCLUES, DANS LA MESURE AUTORISEE PAR LA LOI APPLICABLE, Y COMPRIS NOTAMMENT TOUTE GARANTIE IMPLICITE RELATIVE A LA QUALITE MARCHANDE, A L'APTITUDE A UNE UTILISATION PARTICULIERE OU A L'ABSENCE DE CONTREFAÇON.



# Sun Management Center 3.0 Platform Update 3 Software Release Notes

---

The Sun™ Management Center 3.0 Platform Update 3 release provides additional hardware platform support and add-on packages for Sun Management Center 3.0. This release supercedes the content and functionality in the Sun Management Center 3.0 Platform Update 2 release. For the latest information about the individual hardware platforms supported in this release, refer to the Sun Management Center web site:

<http://www.sun.com/sunmanagementcenter>

Be sure to also read the *Sun Management Center 3.0 Software Release Notes* before you install the Sun Management Center 3.0 Platform Update 3 software. The document is located on the Platform Update 3 CD (3 of 3).

License terms for third-party software are included in a Read-Me-License on the distribution CD.

This Release Notes document covers the following topics:

- What is Sun Management Center 3.0 Platform Update 3?
- Documentation
- Upgrading to Sun Management Center 3.0 Platform Update 3
- Patch Installation and Setup
- Bugs Fixed By the Platform Update 3 Jumbo Patch
- System Reliability Manager for Sun Management Center 3.0
- MCP Changes After Patch Installation
- Localization Issues for Non-English Environments
- Known Bugs
- Known Issues

---

# What is Sun Management Center 3.0 Platform Update 3?

Sun Management Center 3.0 Platform Update 3 provides support for additional hardware platforms and add-on packages that were not included in the Sun Management Center 3.0 release. This Platform Update 3 release continues support for the following hardware platforms from previous Platform Update releases:

- Sun Fire™ 6800, 4810, 4800, and 3800
- Sun Fire 880
- CP2040 and CP2060
- Netra™ X1
- Netra T1 AC200/DC200

In addition, Sun Management Center 3.0 now includes support for the following hardware platforms in the Platform Update 3 release:

- Sun Fire 15K
- Netra T4

---

**Note** – If you plan to install Sun Management Center 3.0 software for Platform Update 3 in a non-English environment, see “Localization Issues for Non-English Environments” on page 18.

---

Platform Update 3 also contains the following updates from the Platform Update 2 release:

- Enhanced modules for Sun Fire 6800, 4810, 4800, and 3800
- Add-on package for Sun Fire 15K
- Add-on package for Netra T4
- Jumbo patch for Sun Management Center 3.0 Platform Update 3
- Jumbo patch for System Reliability Manager product

---

**Note** – The following two modules are not supported in this release:  
—Dynamic Reconfiguration (DR) in Sun Fire 3800, 4800, 4810, and 6800 Systems and Sun Fire 15K Systems  
—Platform/Domain State Management (PDSM) in Sun Fire 15K Systems  
If you attempt to load these modules, the modules will automatically be disabled.

---

The Sun Management Center 3.0 Platform Update 3 Jumbo patch will patch whatever component packages are installed on your system.

---

# Documentation

You can access the Sun Management Center 3.0 documentation and related Sun Management Center hardware platform documentation in the following location on the Platform Update 3 CD (3 of 3):

`/cdrom/cdrom0/Docs`

---

**Note** – The documents listed under the “Related Documentation” section of the *Sun Management Center 3.0 Software Release Notes* may not necessarily be the same documents provided on the Sun Management Center 3.0 Platform Update 3 CD.

---

---

**Note** – The third paragraph on page 3 of the *Sun Management Center 3.0 Software Supplement for Sun Fire 6800/4810/4800/3800 Systems* is incorrect. The Dynamic Reconfiguration features described in Chapter 6 and elsewhere in this supplement require a Dynamic Reconfiguration-enabled Sun Fire 6800, 4810, 4800, or 3800 system. The *Sun Fire 6800, 4810, 4800, and 3800 Systems Dynamic Reconfiguration User Guide* that is referenced on pages xvi, 3, and 85 is not available with this release.

---

---

# Upgrading to Sun Management Center 3.0 Platform Update 3

If you are installing Sun Management Center 3.0 for the first time, refer to the *Sun Management Center 3.0 Software Installation Guide* for details on installing the software and details about the installation script. You must first install the Sun Management Center 3.0 base component layers before you install the Platform Update 3 Jumbo patch as described in “Patch Installation and Setup” on page 4.

If you are planning on upgrading to Platform Update 3 from either Sun Management Center 3.0 or from a previous Sun Management Center 3.0 Platform Update release, first do the following:

1. **Identify the Platform Update 3 patch ID specific to your operating environment and Sun Management Center 3.0 release version (see TABLE 1).**

**2. Verify whether you already have the Platform Update 3 Jumbo patch installed on your system:**

```
% showrev -p | grep patchID_number
```

If you already have the designated patch for Platform Update 3 installed, go to Step 3.

If you do *not* have the designated patch for Platform Update 3 installed, follow the procedures in “Patch Installation and Setup” on page 4, then go to Step 3.

---

**Note** – If you wish to install System Reliability Manager for Sun Management Center 3.0, you need to also install the System Reliability Manager Jumbo patch. See “System Reliability Manager for Sun Management Center 3.0” on page 12.

---

**3. Install the Platform Update 3 add-on package(s).**

For platform-unique installation details about an add-on product, refer to the hardware platform supplement on the Platform Update 3 CD (3 of 3) specific to the add-on product you wish to install.

**a. Run the `es-inst` script to install the Platform Update 3 add-on package(s).**

For details on the Sun Management Center 3.0 installation script, refer to the *Sun Management Center 3.0 Software Installation Guide*.

The individual add-on product packages can be found in the following directory on the Platform Update 3 CD (2 of 3):

```
image/Addons/
```

---

## Patch Installation and Setup

This section describes patch installation and setup procedures specific to the Sun Management Center 3.0 Platform Update 3 release. The Sun Management Center 3.0 Platform Update 3 Jumbo patch contains fixes for the Sun Management Center 3.0 bugs listed in “Bugs Fixed By the Platform Update 3 Jumbo Patch” on page 9.

---

**Note** – Install the Platform Update 3 Jumbo patch only *after* you have installed the Sun Management Center 3.0 base component layers. The Platform Update 3 Jumbo patch will overwrite any previously-installed Platform Update Jumbo patch.

---

For Solaris operating environments, follow the steps provided in “Installing the Patch in a Solaris Environment” on page 5.

For Windows 98 and Windows NT environments, follow the steps provided in “Installing the Patch in a Windows Environment” on page 8.

---

**Note** – If you want to use the Sun StorEdge™ A5x00 module, you must install the SUNWluxop and/or SUNWluxox storage patch for the corresponding operating environment. Loading the A5x00 module without installing the appropriate patch will cause the Sun Management Center agent to die. You can access either patch from the following web site: <http://www.sun.com>

---

## Installing the Patch in a Solaris Environment

You can install the patch from either the CD or web as described in the following procedures.

### ▼ To Install the Patch From the CD

1. **Become superuser by using the `su -` command.**
2. **Stop all Sun Management Center processes. For example:**

```
# /opt/SUNWsymon/sbin/es-stop -A
```

3. **Insert the Sun Management Center 3.0 Platform Update 3 CD (2 of 3) in the CD-ROM drive.**
4. **Change to the CD-ROM directory.**
  - If you are using the Volume Manager (`vold`), type:

```
# cd /cdrom/cdrom0
```

- If the CD-ROM drive is not already mounted, mount the drive by typing:

```
# mkdir /cdrom/cdrom0
# mount -o ro -F hsfs /dev/dsk/cXtYdZs0 /cdrom/cdrom0
# cd /cdrom/cdrom0
```

5. Copy the patch specific to your operating environment and Sun Management Center 3.0 release version (see TABLE 1) from the following directory:

```
image/Patches/
```

Go to Step 5 of “To Install the Patch From the Web” on page 6.

## ▼ To Install the Patch From the Web

1. Go to the following Sun Management Center web site:

```
http://www.sun.com/software/sunmanagementcenter/download/
```

2. Download the patch ID specific to your operating environment and Sun Management Center 3.0 release version (see TABLE 1).

TABLE 1 Sun Management Center 3.0 Platform Update 3 Patch IDs

Operating Environment	Sun Management Center 3.0 RR Version (Build 39)	Sun Management Center 3.0 GA Version (Build 41)
Solaris™ 2.5.1	110861-03	110862-03
Solaris 2.6	110971-04	110936-04
Solaris 7	110972-04	110937-04
Solaris 8	110973-04	110938-04
Windows	110863-03	110863-03

If you are not sure which version of Sun Management Center 3.0 you have installed on your system, type the following command to verify your particular Build number:

```
% pkgparam SUNWescom VERSION
```

3. Become superuser by using the `su -` command.
4. Stop all Sun Management Center processes. For example:

```
# /opt/SUNWsymon/sbin/es-stop -A
```

5. Change directory to the location where the patch has been downloaded.
6. Review the `README` file within the patch directory.



- 7. If you are running in a Solaris 2.5.1 operating environment, use the `installpatch` command to apply the patch. Otherwise, go to Step 8.**

For example, if you had downloaded RR patch ID 110861-03 for the Solaris 2.5.1 operating environment, you would type the following command after changing to the 110861-03 directory:

```
# ./installpatch .
```

- 8. Use the `patchadd` command to apply the patch for Solaris 2.6, Solaris 7, and Solaris 8 operating environments.**

For example, if you had downloaded RR patch ID 110972-04 for the Solaris 7 operating environment, you would type the following command after changing to the directory where the 110972-04 directory is located:

```
# patchadd 110972-04
```

- 9. Start all Sun Management Center processes. For example:**

```
# /opt/SUNWsymon/sbin/es-start -A
```

---

**Note** – To access information on the bugs fixed by the patch, open the `README` file in your particular patch ID directory. For example:  
110972-04/README.110972-04

---

# Installing the Patch in a Windows Environment

If you are downloading the Platform Update 3 Jumbo patch from either the CD or the web in a Microsoft Windows 98 or Windows NT environment, follow the procedure described below.

## ▼ To Install the Patch From the CD or Web

### 1. Download the patch.

- If you are installing the patch from the CD, insert the Platform Update 3 CD (2 of 3) in the CD-ROM drive and access the Windows patch (see TABLE 1) from the following directory:

`image/Patches/Windows`

- If you are installing the patch from the web, go to the following Sun Management Center web site:

`http://www.sun.com/software/sunmanagementcenter/download/`

### 2. Copy the patch zip file to an appropriate (patch directory) location.

### 3. Change directory to the patch directory and unzip the file.

### 4. Change directory to the patch ID number directory.

For example, if you had downloaded RR patch ID 110863-03.zip and then unzipped the file, you would change directory to 110863-03.

### 5. Verify that the CLASSPATH and PATH are set correctly.

For example, the CLASSPATH is as follows:

```
C:\patch_directory\patchID_number
```

and the PATH is as follows:

```
C:\base_directory\SunMC3.0\javasoft\bin
```

### 6. Type the following command:

```
java WelcomeView
```

### 7. Click on the Install button on the displayed GUI.

## ▼ To Uninstall the Patch

1. Type the following command:

```
java WelcomeView
```

2. Click on the Uninstall button on the displayed GUI.

---

## Bugs Fixed By the Platform Update 3 Jumbo Patch

The following table lists the known bugs for Sun Management Center 3.0 that have been fixed for the Platform Update 3 release by the Platform Update 3 Jumbo patch.

**TABLE 2** Sun Management Center 3.0 Bugs Fixed for Platform Update 3

Bug ID	Synopsis
4273053	In Sun Management Center, discrepancy b/t physical view and manual as to memory slot location
4367329	MCP does not work for multiple instance modules
4382313	hwdiag.info is not available
4390668	Java console hangs because of <code>java.lang.OutOfMemoryError</code>
4393621	CLI error message is not I18N-ed
4393870	HD Suite console has bad formatting so that some buttons are hidden
4394182	<code>.sql</code> and <code>.log</code> files in <code>/tmp</code> do not get cleaned up
4395988	Set attribute does not work for table property and attribute
4396238	Attribute editor failed on cell dataview from multi instance table
4396800	Warning message when installing advanced monitoring on Sun Fire - no config reader
4397035	<code>es-device/es-details</code> create insecure files
4397179	<code>getAllTopoObjects</code> does not display all objects that match filter conditions
4397379	<code>es-uninst</code> should remove Java if installed in alternate location
4397453	Assign and configure command – error in <code>/var/opt/SUNWsyman/log/agent.log</code>

**TABLE 2** Sun Management Center 3.0 Bugs Fixed for Platform Update 3 *(Continued)*

Bug ID	Synopsis
4397602	Installation does not install current DE document
4397692	Migration fails if kernel tuning files need to be changed
4398249	<code>getAttributes</code> does not work for properties on certain tables
4398282	“Hardware Diagnostic Suite Server not found” is displayed in English
4398979	MCP: restarts the agent
4398980	Module <code>.dat</code> file is removed when module is unloaded
4398984	MCP does not support module instance names
4399229	Probe does not support a firewall between agent and server
4399558	<code>es-servercontrol.sh</code> does not allow valid Sun Management Center users to login
4400157	Default or factory shipped suggested fix does not get added to dB
4401216	Unable to launch telnet from custom pop-up menus
4401286	In web console, unable to see attribute editor for platform agent
4401677	Improper window is displayed against insufficient privileges
4402296	<code>ack</code> case in alarm rules does not get invoked if the MIB node has security
4402478	Variable name is displayed instead of its value
4403112	Alarm dates are all yesterday
4403668	SDK file has wrong “include” statement
4404150	Seeing several duplicate alarms - bogs machine down
4405052	Published MIBs need to be updated for inconsistencies with modules
4406111	When a new alarm is coming the deleted alarms display again
4406478	Sun Management Center-SLM error message displayed even after Sun Management Center uninstall
4406683	Closed alarms have the same date as when alarm was open
4407106	Config Reader aborts on U10 with high density DIMMs
4408468	Metadata process fails to load for modules that require <code>tcl/toe</code> classes
4408507	Platform Types filter does not include Sun Fire 15K criteria
4409159	WGS static config reader fails on older platforms running S8U1 or U2
4410415	Topology license module has objects that are not present in server context
4410476	3.0 installation installs two <code>configd</code> on desktop or WGS machine
4410629	CLI must support scripted and command line logon

**TABLE 2** Sun Management Center 3.0 Bugs Fixed for Platform Update 3 *(Continued)*

Bug ID	Synopsis
4412566	The module list in filter window is inconsistent with task window
4412949	Error message should display if <code>hdsrvrmi.jar</code> is missing
4413151	I18N table title cannot show Chinese as previous builds
4413666	Event SLM needs to be multi threaded
4414018	Exception error during installation and setup of Sun Fire add-on
4414058	Unnecessary message is displayed in SC network setup table
4414320	Sun Management Center does not clear the old irrational alarm
4417087	Sun Fire shown as blue folders by Sun Management Center
4417792	Filter based on module does not work normally
4417934	SUNWessta fails to uninstall
4420049	Incorrect question asked when migrating Sun Management Center 3.0 data
4421880	Probe viewer crashes agent
4422805	<code>pkgdata</code> port of C causes the agent to lose the function call of <code>clearError</code>
4424767	Sun StorEdge A5x00 components need to report status change immediately
4426286	Error message in <code>hd-server.sh</code> when starting HD agent
4427745	SyMON agent <code>esd</code> dumps core
4428712	RefreshTrigger for the DR module on EM node not working
4428722	<code>em_slm.so</code> causes <code>sysevent</code> to core dump
4429555	Remove repacking of <code>sysevent</code> datatype from <code>em_slm</code>
4431274	Topology license module should not use timestamps and remove invalid licenses
4445242	HWDS agent is not finding the firewall ports of Sun Management Center
4450752	Sun Management Center 3.0 does not support licensing for add-ons
4450836	In Windows 98/NT, machine Details Applications tab does not show Hardware Diagnostic
4454597	Sun Management Center 3.0 installs Qpatches as part of install script
4455381	Licensing data is incorrect for 3 modules
4456023	Hardware Diagnostic Suite mapping does not show individual Sun Fire memory boards
4456455	Sun Management Center agent core dumps during start-up on Sun Fire 15K domain
4469673	Hardware Diagnostic Suite requires a change for SUID <code>ptexec</code> permissions

**TABLE 2** Sun Management Center 3.0 Bugs Fixed for Platform Update 3 *(Continued)*

Bug ID	Synopsis
4469680	Hardware Diagnostic Suite Agent needs to search for minPort/maxPort in domain-config.x
4480284	Agent defunct processes
4481320	Hardware Diagnostic Suite: More than one edagent was running on a system
4484159	Hardware Diagnostic Suite: Some tests cannot be executed

---

## System Reliability Manager for Sun Management Center 3.0

The System Reliability Manager product provides the following module packages for Sun Management Center 3.0:

- OS Crash Dump Analyzer (to detect and evaluate kernel crash dumps)
- File Watcher (to monitor a list of files for additions, deletions, and modifications)
- Patch Management (to generate alarms for uninstalled patches)
- Script Repository and Script Launcher (to execute scripts that perform arbitrary management tasks on remote devices)

For details on the System Reliability Manager product, refer to the *System Reliability Manager for Sun Management Center 3.0 Software User's Guide* on the Platform Update 3 CD (3 of 3).

---

**Note** – To install the System Reliability Manager product, you must follow the sequence of steps provided in “Installing System Reliability Manager for Sun Management Center 3.0” on page 13.

---

# Installing System Reliability Manager for Sun Management Center 3.0

The System Reliability Manager product should only be installed in the order described within this section.

1. **Install the Sun Management Center 3.0 base component layers with the `es-inst` script.**

For details on the Sun Management Center 3.0 installation script, refer to the *Sun Management Center 3.0 Software Installation Guide*.

2. **Upgrade your system with the Platform Update 3 patch ID specific to your Sun Management Center release version as shown in TABLE 1.**

For details on how to install patches, see “Patch Installation and Setup” on page 4.

You should install the latest recommended patch on *all* systems of *all* Sun Management Center layers.

3. **Install the System Reliability Manager product.**

The `es-inst` installation script can also be used to install the System Reliability Manager product. The script will prompt you to install System Reliability Manager as an add-on product.

If the installation script detects that the server layer is not patched with the recommended patch, you will *not* be prompted to install the System Reliability Manager product. Although it is possible to install the product on console and/or agent systems without the recommended patch, the functionality of the System Reliability Manager modules will be impacted.

If you are not prompted to install the System Reliability Manager product because the server layer has not been patched, simply install the recommended patch and then run the `es-inst` installation script to install the System Reliability Manager product add-on. (The recommended configuration is to install the latest applicable patch on all systems of all Sun Management Center layers.)

A console or agent layer can be patched before or after installing the System Reliability Manager product.

4. **Upgrade your system with the System Reliability Manager patch ID specific to your operating environment as shown in TABLE 3.**

The System Reliability Manager patch fixes the following System Reliability Manager bug:

```
4482464    Module shows already-installed patches as missing
```

**TABLE 3** System Reliability Manager Patch IDs

Operating Environment	System Reliability Manager for Sun Management Center 3.0 Patch ID
Solaris 2.5.1	111934-01
Solaris 2.6	111935-01
Solaris 7	111936-01
Solaris 8	111937-01

## Known Issues with Setup

If you run setup after installing the Sun Management Center 3.0 software, but have chosen not to preserve the data, you need to perform the following steps (as superuser) for the System Reliability Manager product to work correctly.

1. **After setup has completed and the existing data has been removed, delete the `modules.info` file:**

```
# rm /var/opt/SUNWsymon/SysMgmtPack/modules.info
```

2. **Run setup for the System Reliability Manager product:**

```
# /opt/SUNWsymon/sbin/es-setup -p SystemManagement
```




---

# MCP Changes After Patch Installation

The following updates have been made to the “Module Loader” and “Create/Edit Tasks” windows for Module Configuration Propagation (MCP).

## Module Loader

A Default Settings button has been added to the Module Loader window as shown at the bottom of FIGURE 1.

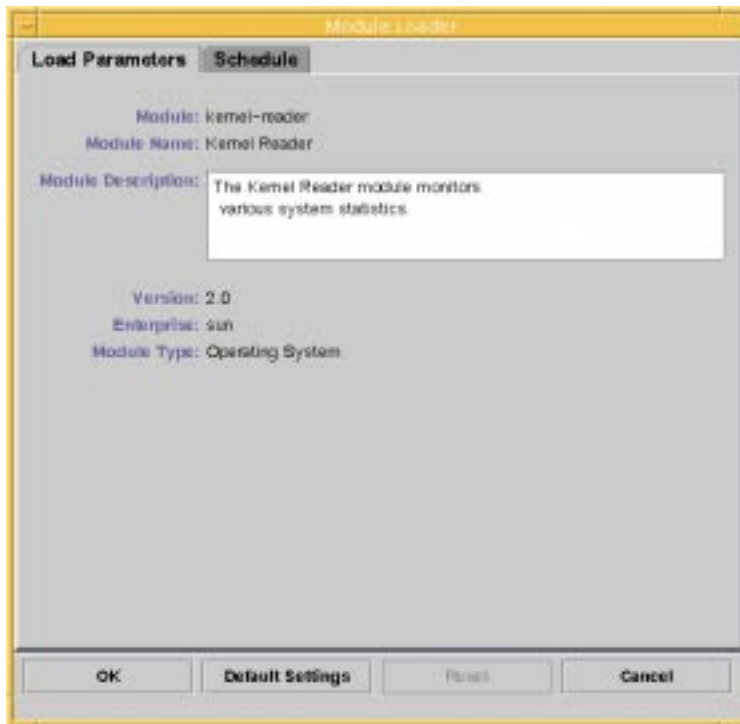

**FIGURE 1**    Module Loader Window

You can load a module by either:

- Clicking OK to load using previously overridden settings (i.e., alarm thresholds), if any exist.
- Clicking on Default Settings to load using the default settings. Any previously overridden settings are discarded.

## Create/Edit Tasks

Four new columns have been added to the lower table of the Create/Edit Tasks window for when you create or edit an MCP task.

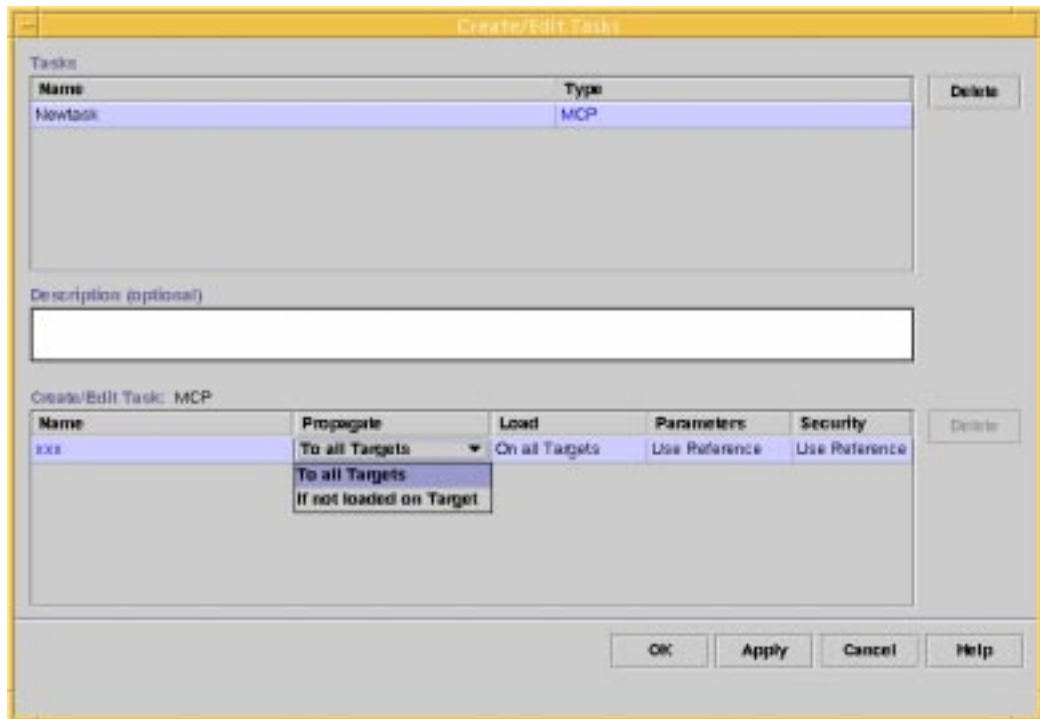


FIGURE 2 Create/Edit Tasks Window

1. Select a parcel in the Name column.
2. Select one of the options in the Propagate column:
  - To all Targets (Propagate to all target agents.)

- If not loaded on Target (Propagate a module only if the module is not loaded on the target agent.)

**3. Select one of the options in the Load column:**

- On all Targets (Load the module.)
- If loaded on Target (Reload the module only if it is loaded. Do not load if the module is not loaded.)

**4. Select an option in the Parameters column.**

This affects how the module is loaded:

- Use Reference (Use the module load parameters from the reference agent.)
- Use Target (Use the module load parameters from the target agent.)

**5. Select an option in the Security column.**

This affects how the module is loaded:

- Use Reference (Use the security settings from the reference agent.)
- Use Target (Use the security settings from the target agent.)

When the module is propagated, the agent no longer restarts. Depending on the options selected, either an already-loaded module is reloaded or a module that is not loaded is loaded. Also, support for propagating multi-instance modules has been added.

# Localization Issues for Non-English Environments

## Netra Servers

Localization for the separate Netra Server add-on is not supported with this release of the product. If you have previously installed localization packages for this add-on (see TABLE 4), you should remove those packages manually by following the steps described in “To Remove Localization Packages” on page 18.

**TABLE 4** Localization Packages To Be Removed

Package Name	Description
SUNWcesns	Simplified Chinese Sun Management Center Server Images For Netra-t Servers
SUNWdesns	German Sun Management Center Server Images For Netra-t Servers
SUNWeesns	Spanish Sun Management Center Server Images For Netra-t Servers
SUNWfesns	French Sun Management Center Server Images For Netra-t Servers
SUNWhesns	Traditional Chinese Sun Management Center Server Images For Netra-t Servers
SUNWiesns	Italian Sun Management Center Server Images For Netra-t Servers
SUNWjesns	Japanese Sun Management Center Server Images For Netra-t Servers
SUNWkesns	Korean Sun Management Center Server Images For Netra-t Servers

### ▼ To Remove Localization Packages

1. **Check whether you have any localization packages listed in TABLE 4 already installed:**

```
% pkginfo package_name package_name ...
```

2. If `pkginfo` displays information of any localization package *without* an error message, become superuser with the `su -` command, then remove the package(s):

```
# pkgrm package_name package_name ...
```

---

## Known Bugs

The following is a list of known problems in the Sun Management Center 3.0 software. This list includes workarounds if any are available at the time of this release. You should also refer to the *Sun Management Center 3.0 Software Release Notes* for any additional known problems in the Sun Management Center 3.0 release.

- **Bug 4399253:** Error message `Bad command or file name` is displayed several times during the installation on Windows 98.

When you are installing Sun Management Center software on Windows 98 with the `install.bat` command, the error message `Bad command or file name` is displayed by the command interpreter.

Workaround: Ignore the message.

- **Bug 4399254:** `README` file contains some incorrect characters on Windows.

The `README` file is only provided in UNIX® format, so some characters are displayed incorrectly with "Notepad" on Windows.

Workaround: Open the file with "Wordpad" or a web browser.

- **Bug 4400295:** Help messages for the command line on Asian Windows display incorrectly.

When you attempt to display the help messages of `es-cli` sub commands on Asian Windows with the `-h` option, the messages are partially incorrect.

- **Bug 4400684:** Asian characters appear corrupted on some Web Console pages.

If you are using the Web Console for asian languages, asian characters are displayed incorrectly on some pages with certain web browsers, especially on Windows.

Workaround: This problem is caused by the incompatibility of the CSS (Cascading Style Sheet) and certain web browsers. If you have this problem, first try another web browser. If the problem is not resolved, you need to either remove the following files:

```
<install_directory>/SUNWsymon/web/styles/EditorStyle.css  
<install_directory>/SUNWsymon/web/styles/HeaderStyle.css
```

or modify them and remove attributes for font-family (as shown below):

```
EditorStyle.css: "font-family: sans-serif, impact;"  
HeaderStyle.css: "font-family: sans-serif, impact;"
```

- **Bug 4401503:** In German locale, some prompts for installing Advanced System Monitoring will not accept “j” as “Yes.”

If you install Advanced System Monitoring software in a German locale, some messages prompt you with [j/n/b]. However, the character “j” is not accepted as a “Yes” answer.

Workaround: Type upper-case “J” instead of “j” in lower-case.

- **Bug 4401681:** Confusing translation for setup in zh\_TW locale.

After installation, the question Do you want to run setup now? is displayed to continue the setup process. However, for the zh\_TW locale, the question is erroneously translated to Do you want to run install now?

Workaround: You should ignore this incorrect translation, and decide whether to continue the setup process.

- **Bug 4402476:** Variable name is displayed instead of its value.

For Desktop, Workgroup Server, and Netra t Server add-on products, the console does not provide a description for the rules of the Configure Reader module.

- **Bug 4402502:** Online help of Web Console does not open correctly for languages other than English on Solaris 2.6 and Solaris 7.

If you install online help locally in languages other than "C" on Solaris 2.6 or Solaris 7, you cannot browse online help for the Web Console.

Workaround: As superuser, create the following symbolic link:

```
# cd install_directory/SUNWsymon/lib/locale  
# ln -s locale_name C
```

- **Bug 4403241:** Online help of Web Console does not work on Solaris 8.

If you install online help with full European locale names such as `de_DE.ISO8859-15`, it cannot be accessed from the Web Console.

Workaround: As superuser, create a symbolic link using the current locale name:

```
# cd install_directory/SUNWsymon/lib/locale
# ln -s short_locale_name full_locale_name
```

For example:

```
# ln -s de de_DE.ISO8859-15
```

- **Bug 4489368:** Sun Management Center console hangs when Hardware Diagnostic Suite test is stopped.

Workaround: If the Navigation tree is fully expanded before selecting a device to test, this bug does not appear. This bug only appears when a device is selected while the tree is still collapsed.

- **Bug 4490403:** Error occurs during Composite Object “create.”

Workaround: Create the object through a Discovery request. Edit ► Create succeeds when all Platform Agents are running.

---

## Known Issues

### Removing Any Previous Versions of Hardware Diagnostic Suite

If an earlier version (1.0) of Hardware Diagnostic Suite is installed on your system, you must remove it before you install Hardware Diagnostic Suite 1.1 through the Sun Management Center 3.0 installation script.

## ▼ To Determine if Hardware Diagnostic Suite 1.0 Is Installed

1. Enter the following command:

```
% pkginfo SUNWed SUNWedag SUNWedagx SUNWedss SUNWedh
```

If the `pkginfo` command reports that all packages are “...not found”, then Hardware Diagnostic Suite 1.0 is not installed, and there is no need to perform the following procedure. If you see any messages that report that any Hardware Diagnostic Suite packages are installed, follow the procedure below.

## ▼ To Remove Hardware Diagnostic Suite 1.0

1. Become superuser.
2. Run the Hardware Diagnostic Suite uninstall script:

```
# /opt/SUNWhwdiag/sbin/uninstall-diag

Hardware Diagnostic Suite uninstall procedure
-----

This utility removes all the Hardware Diagnostic Suite packages.
Would you like to continue?[y|n|q] y
```

---

**Note** – This example assumes that the Hardware Diagnostic Suite is installed in the default (`/opt`) directory. If it is installed in a different directory, adjust the pathname accordingly.

---

All the Hardware Diagnostic Suite components will be stopped and removed.