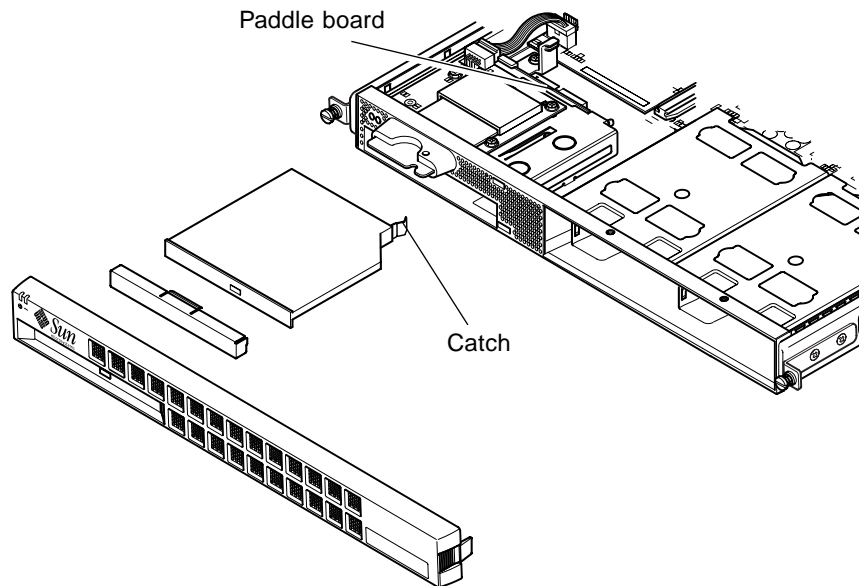

Installing the CD-ROM Drive

Refer to the installation instructions accompanying the Netra T1 server.



Caution – Take care not to touch the lens when the CD-ROM disk tray is in the ejected position.



1. **Make sure you disconnect all power cables and wear an antistatic wrist strap.**
 2. **Remove the top cover by following the procedure described in the *Netra T1 AC200 and DC200 Server User's Guide* (part number 806-5978-10).**
Refer to the diagrams labeled "CD insertion" inside the top cover for illustration of the following instructions for installing the CD-ROM drive.
 3. **Remove the front bezel by grasping it in the middle and squeezing the top and bottom until the clasps release.**
 4. **If you have a full-length PCI card installed, you must remove it before installing the CD-ROM drive (see the *Netra T1 AC200 and DC200 Server User's Guide*).**
 5. **Squeeze and pull out the filler panel at the front of the CD-ROM enclosure.**
 6. **Carefully insert the CD-ROM drive into its enclosure (see diagram opposite).**
Guide the CD-ROM drive in, making sure that its connectors align with, and then engage with, the connectors on the CD-ROM paddleboard (see diagram opposite) at the back of the CD-ROM enclosure. You may need to hold the paddleboard by the black IDE connector to guide the CD-ROM drive home. Make sure that the catch at the rear of the CD-ROM drive clicks onto the chassis.
 7. **Re-install the full-length PCI card if you removed one (see the *Netra T1 AC200 and DC200 Server User's Guide*).**
 8. **Replace the server's cover and tighten the captive screw (see the *Netra T1 AC200 and DC200 Server User's Guide*).**
 9. **Replace the front bezel.**
-

Sun Documentation on the Web

The docs.sun.comsm web site enables you to access Sun technical documentation on the Web. You can browse the docs.sun.com archive or search for a specific book title or subject at:

<http://docs.sun.com>

Sun Welcomes Your Comments


We are interested in improving our documentation and welcome your comments and suggestions. You can email your comments to us at:

docfeedback@sun.com

Please include the part number (806-6990-10) of the document in the subject line of your email.

Copyright 2000 Sun Microsystems, Inc. All rights reserved. Use is subject to license terms. Third-party software, including font technology, is copyrighted and licensed from Sun suppliers. Sun, Sun Microsystems, the Sun Logo, AnswerBook2, docs.sun.com, and Solaris are trademarks or registered trademarks of Sun Microsystems, Inc. in the U.S. and other countries. **RESTRICTED RIGHTS:** Use, duplication, or disclosure by the U.S. Government is subject to restrictions of FAR 52.227-14(g)(2)(6/87) and FAR 52.227-19(6/87), or DFAR 252.227-7015(b)(6/95) and DFAR fs227.7202-3(a).

Copyright 2000 Sun Microsystems, Inc. Tous droits réservés. Distribué par des licences qui en restreignent l'utilisation. Le logiciel détenu par des tiers, et qui comprend la technologie relative aux polices de caractères, est protégé par un copyright et licencié par des fournisseurs de Sun. Sun, Sun Microsystems, le logo Sun, AnswerBook2, docs.sun.com, et Solaris sont des marques de fabrique ou des marques déposées de Sun Microsystems, Inc. aux Etats-Unis et dans d'autres pays.

 Please Recycle Sun Microsystems, Inc. • 901 San Antonio Road • Palo Alto, CA 94303-4900
USA • 650 960-1300 • Fax 650 969-9131



Part Number: 806-6990-10
October 2000, Revision A



Netra™ T1 AC200 and DC200 Servers

CD-ROM Drive

