

# Oracle® Enterprise Manager Ops Center

Configuring and Installing I/O Domains

12c Release 2 (12.2.2.0.0)

E41836-03

December 2014

---

This guide provides an end-to-end example for how to use Oracle Enterprise Manager Ops Center.

## Introduction

Using Oracle Enterprise Manager Ops Center, you can configure and install I/O domains on Oracle VM Server for SPARC systems.

A logical domain is a virtual machine with resources, such as CPU threads, memory, I/O devices, and its own operating system. An I/O domain is a logical domain that has PCIe Endpoint devices assigned to it in Oracle Enterprise Manager Ops Center. Therefore, the I/O domain is defined as Physical I/O Domain in the UI. The PCIe Endpoint devices are manually released from the PCIe bus using the CLI.

The released PCIe Endpoint devices are then available for creating I/O domains. The PCIe bus must be allocated to primary or root domain before releasing the PCIe Endpoint devices.

The number of I/O domains that you can create depends on the number of PCIe Endpoints that are available in a PCIe bus.

In this how to, the following scenario is set to create an I/O domain:

- Oracle VM Server for SPARC 3.1 version installed on Oracle SPARC T4-2 server.
- A PCIe bus *pci\_1* is detached from the primary domain while provisioning Oracle VM Server for SPARC.
- A root domain is created with the detached PCIe bus. The OS is provisioned on the root domain.
- The PCIe Endpoint devices are released from the PCIe bus *pci\_1*.

Use the released PCIe Endpoint and create the I/O domain. Then, provision OS on the domain.

## What You Will Need

You need the following to configure and deploy an I/O domain:

- **Oracle VM Server for SPARC system**  
A server installed and configured with Oracle VM Server for SPARC 3.1 version using Oracle Enterprise Manager Ops Center. Refer to the guide *Oracle Enterprise Manager Ops Center Configuring and Deploying Oracle VM Server for SPARC*.

- Root domain installed and provisioned with OS. Refer to *Configuring and Installing Root Domains* for detailed procedure.

- **Network Connection**

Obtain the details of the Ethernet devices connected to the PCIe bus that will be assigned to the root domain. You must acquire the network interfaces in the PCIe Endpoint device that are physically connected to the network.

The network to which the network interface is physically connected must be discovered and managed in Oracle Enterprise Manager Ops Center.

An IP address to be assigned to the I/O domain OS.

- **Storage Libraries**

The local library is used for virtual disks of the I/O domain. The I/O domain is not migratable and hence the I/O domain metadata is stored in the local library automatically. In this example, 20 GB of virtual disk is created for the I/O domain.

- **OS Image**

You must install and configure Oracle Enterprise Manager Ops Center in Oracle Solaris 11 OS and populate the Oracle Solaris 11 Library with SRUs. You can select an Oracle Solaris 11 OS of particular SRU version.

Refer to *Oracle Enterprise Manager Ops Center Feature Reference Guide* for more information about uploading or importing OS images.


- **Roles and Permissions**

A user with the following roles:

- Virtualization admin role to create I/O domains and server provisioning.
- Plan/Profile admin role to create profiles and plan for I/O domain creation and OS provisioning.

## **Hardware and Software Configuration**

In this example, the I/O domain is installed on Oracle VM Server for SPARC 3.1 version. The control domain is configured and deployed in stand-alone mode and it is not placed in a server pool. The PCIe Endpoint for the I/O domain is from the PCIe bus allocated to the root domain. In the Oracle VM Server for SPARC system, the root domain is first created and provisioned with OS. The root domain is displayed in the UI as follows:

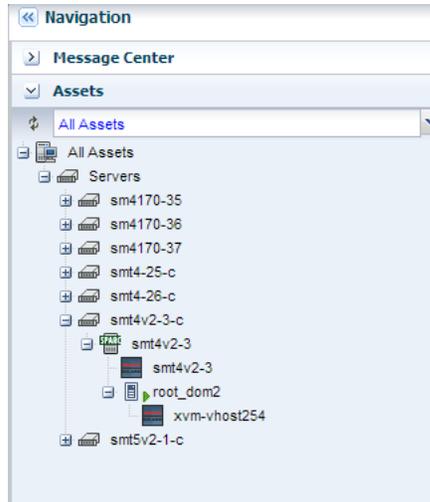

From the root domain, a PCIe Endpoint device is released manually and assigned to the I/O domain. Refer to Oracle VM Server for SPARC documentation at <http://www.oracle.com/technetwork/documentation/vm-sparc-194287.html> for more information about the commands for releasing the PCIe Endpoint devices.

## Configuring and Installing I/O Domains

The steps to configure and install I/O domain are as follows:

- [Create an I/O Domain Profile](#)
- [Deploy I/O Domain Plan](#)
- [Create OS Provisioning Profile](#)
- [Create OS Configuration Profile](#)
- [Create Provision OS Deployment Plan](#)
- [Apply Provision OS Deployment Plan On I/O Domain](#)

### Create an I/O Domain Profile

Create an I/O domain with the following resource requirements:

- Two CPU Threads
- 4 GB of memory. You must provide 4 GB of memory for each I/O device.
- Native CPU architecture
- Local filesystem library for the virtual disks

In this example, virtual network connection is not provided for the I/O domain. Instead, an Ethernet connection to one of the PCIe Endpoint device assigned to the I/O domain will be used for providing the physical network connection for OS provisioning.

You can provide virtual network connection to I/O domain when the I/O domain does not have Ethernet device and has only storage device such as Fibre Channel cards.

In Oracle Enterprise Manager Ops Center, you create I/O domains that have physical resources assigned to them and hence the option Physical I/O Domain in the Subtype of Create Logical Domain profile creation.

### To Create an I/O Domain Profile

1. Select the **Plan Management** section.
2. Expand **Profiles and Policies** and select **Logical Domain**.
3. Click **Create Profile** from the Actions pane.

The Create Logical Domain Profile wizard is displayed.

4. Enter a name and description to identify the profile.

Retain the option to create a deployment plan for this profile. Select **Physical IO Domain** in the Subtype.

**Identify Profile** \* Indicates Required Field

\* Name: my\_io\_dom

Description:

Create a deployment plan for this profile.

\* Subtype: Subtype  
Guest Domain  
HA Guest Domain  
Physical IO Domain  
Root Domain

Click **Next**.

5. Enter the name of the I/O domain as *io\_domain* and the starting number as 1. The I/O domain will be created with the name as *io\_domain1*.

Provide description and add new tags for the I/O domain. All the logical domains created using this profile use the same description and tags.

**Specify Domain Identity** \* Indicates Required Field

Enter the identification for the logical domain:

\* Name: Automatic naming; Prefix: io\_domain  
Starting Number: 1

Description:

Tags:   Search

Tag Name	Value

Click **Next** to configure the CPU Threads and memory.

6. The threads in the physical CPU of the Oracle VM Server are dedicated to the logical domains. Select Virtual CPU as the CPU Model and enter the values for CPU Threads and memory to be allocated for the I/O domain:
  - 2 CPU Threads.
  - 4 GB of memory.
  - Do not specify a value for Crypto Units. Depending on the number of CPU threads, the Crypto units are assigned automatically.

**Configure Logical Domain** \* Indicates Required Field

Enter the CPU and memory resource allocation for the logical domain.

**CPU and Memory Settings**

**CPU Model:**  Virtual CPU  Whole-Core

\* **CPU Threads:**

**CPU Architecture:**  generic  native

**Requested Crypto Units:**

\* **Memory:**  GB

Click **Next**.

7. Specify the PCIe Endpoint Type and number of devices that must be allocated to the I/O domain. The type can be Ethernet, InfiniBand, SCSI, Fibre Channel or Any type.
 

In this example, an Ethernet device is selected and one PCIe Endpoint device is allocated to the I/O domain.

**Specify PCIe Endpoint Devices**

Specify the number of PCIe Endpoint devices to be allocated to the domain.

PCIe Endpoint Devices	
PCIe Endpoint Type	Number of PCIe Endpoint
Ethernet Device	1

Click **Next** to specify the storage for the logical domains.

8. Select the local file system storage library for the virtual disks. Enter the disk size as 20 GB. You can retain or edit the name of the virtual disk.

### Specify Storage and Disks

Select a library to store the logical domain metadata and the libraries to be used for logical domain's storage.

Type	Library	LUN/Virtual Disk Name	Volume Group	Required Size(GB)
Local Filest...	file:///guests	vdisk0	-	20

Click **Next** to specify the networks for the domains.

- Skip this step to specify the networks that must be used for OS provisioning. The physical connection network is used from the Ethernet device in the PCIe Endpoints assigned to the I/O domain.

### Specify Networks

Select the networks to be connected to the logical domain and the number of connections for each network. The order of the networks entered would be used when binding the networks to the NICs during the profile execution.

Network Domain	Network	Number of Connections
No data		

Click **Next** to view the summary of the logical domain details.

- Review the information and click **Finish** to save the profile.

### Summary

Target Type: Oracle VM Server for SPARC

Automatic naming; Prefix: io\_domain

Starting Number: 1

Description:

CPU Model: Virtual CPU

CPU Threads: 2

CPU Architecture: native

Requested Crypto Units: -

Memory: 4 GB

PCIe Endpoint Devices:

PCIe Endpoint Type	Number of PCIe Endpoint
Ethernet Device	1

Metadata Library Type: Local

Metadata Library: file:///guests

Virtual Disks:

Type	Library	LUN/Virtual Disk Name	Volume Group	Required Size(GB)
Local	file:///guests	vdisk0	-	20

Network:

Network Domain	Network	Number of Connections
----------------	---------	-----------------------


The profile to create to the I/O domain and the corresponding deployment plan are created. Apply the deployment plan to create the I/O domain.

## Deploy I/O Domain Plan

Deploy the automatically created I/O domain plan to create I/O domain. The I/O domain is created without any OS provisioned on it.

### To Deploy the Logical Domain Plan

1. Select the **Plan Management** section in the Navigation pane.
2. Expand **Deployment Plan** and select **Create Logical Domains**.
3. Select the plan from the list of plans and click **Apply Deployment Plan** in the Actions pane.
4. In the **Select Targets** window, select the Oracle VM Server for SPARC system on which you want to create the I/O domain.

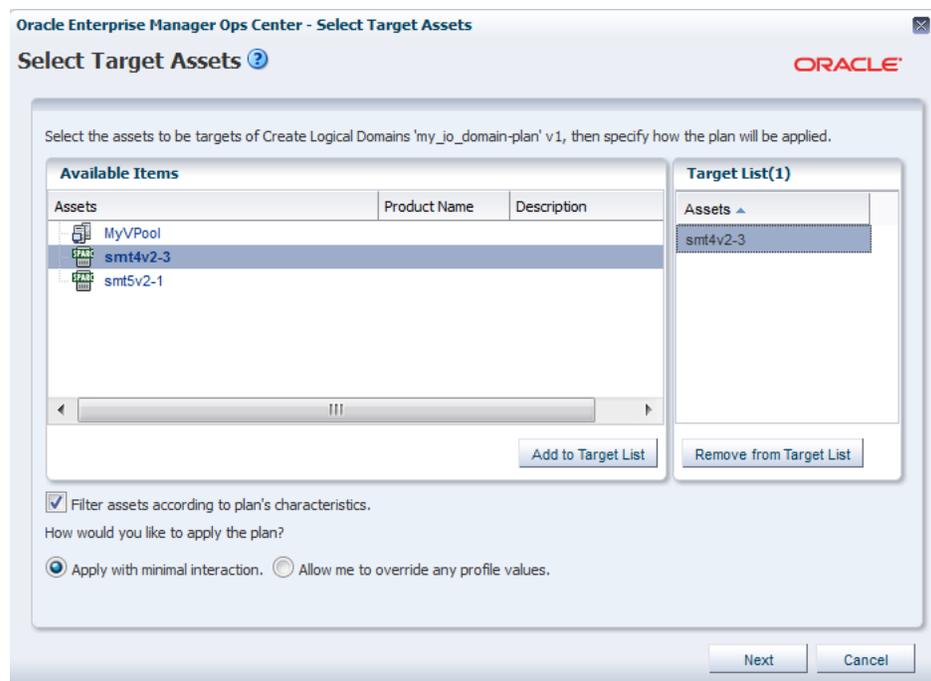

Click **Add to Target List** to move the selected target Oracle VM Server to the Target List. Select to apply the deployment plan in minimum interaction mode.

Click **Next**.

5. The Specify Domain Identity step is displayed. Confirm the given name in the profile.

**Specify Domain Identity** \* Indicates Required Field

Enter the identification for the logical domain:

\* **Name:** Automatic naming; Prefix:   
 Starting Number:

**Description:**

**Tags:** + -  Search

Tag Name	Value

Click **Next** to proceed.

- Specify the PCIe Endpoint devices for the I/O domain. The PCIe Endpoints that are released from the root domain are listed in the Alias.

**PCIe Endpoint Devices Assignment**

Specify the PCIe endpoint devices for each I/O domain.

Target: smt4v2-3

**PCIe Endpoints Assignment for io\_domain1**

Alias	Root Domain	PCIe Bus	PCIe Endpoint Type	Device Name
/SYS/MB/PCIe9	root_dom2	pci_1	Unknown type	pci@500/pci@1/pci@0/pci@0
/SYS/MB/PCIe9				

Click **Next**.

- In the Storage Resource Assignments step, retain the storage library selected for the virtual disks from the profile.

There is only one path to access the backend storage and the multipathing group name is not entered. Therefore, multipathing group is not created for this virtual disk.

The virtual disk server is named as *io\_domain1-vds0* by default. If required, you can modify the name of the virtual disk server.

**Storage Resource Assignments**

Specify the storage resource for each logical domain.

Target: smt4v2-3

Name of the Virtual Disk Server to be created on the domain:

**Virtual Disk/Storage Specification for Logical Domain io\_domain1**

Type	Library	LUN/Virtual Disk Name	Volume Group	Multipathing Group	Requi... Size(...)
Local File...	file:///guests	io_domain1-vdisk0			20

**Edit Multipathing For Device io\_domain1-vdisk0**

Select	Service Name	Domain Name	Active Path
--------	--------------	-------------	-------------

Click Next.

- In the profile to create I/O domain, the network connections details were not provided. Therefore, the network connection settings step and network resource step are empty.

**Specify Network Connections Settings**

Specify whether the network connection must be created using virtual function or vnet, and also the tagging mode for networks configured with VLAN ID.

**Network connections**

Network	SR-IOV	VLAN ID / P-KEY	Mode
---------	--------	-----------------	------

**Networks Resource Assignments**

Specify the network resource for each logical domain.

Target: smt4v2-3

**Network Specifications for Logical domain io\_domain1**

Network	SR-IOV	Service Domain	Map connection	VLAN ID / P-KEY	Mode
---------	--------	----------------	----------------	-----------------	------


Click Next.

- Schedule the job to run now.



Click **Next**.

- Review the properties and click **Apply** to apply the deployment plan to create logical domain.

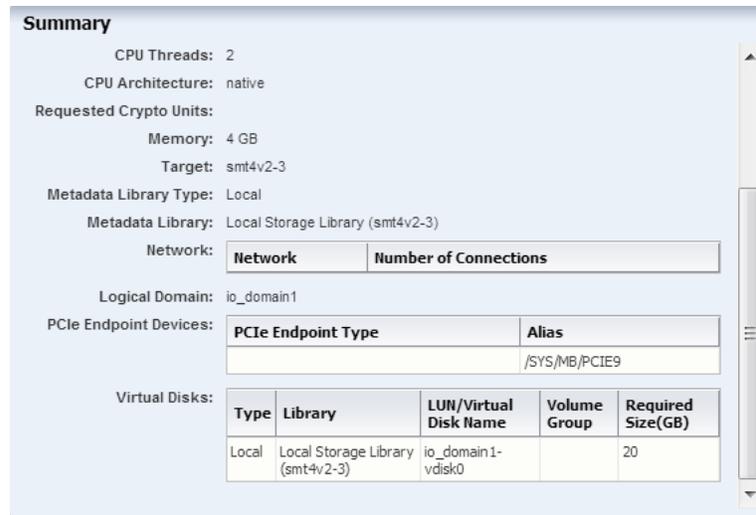

The I/O domain is created and is in installing state. The domain is displayed under the corresponding Oracle VM Server for SPARC system. Now, apply OS provisioning deployment plan to provision OS on the domain. The PCIe Endpoint device is assigned to the I/O domain. The PCIe slot status will be updated once the OS is provisioned on it.

## Create OS Provisioning Profile

Create a new OS provisioning profile for the Oracle Solaris 11.1 OS that must be provisioned on the I/O domain. You can also edit the default profiles that are created for the Oracle Solaris 11.1 OS. The procedure in this section describes about creating a new OS provisioning profile.

### To Create an OS Provisioning Profile

- Select the **Plan Management** section in the Navigation pane.
- Expand **Profiles and Policies** and select **OS Provisioning** profile.
- Click **Create Profile** in the Actions pane.  
The Create Profile - OS Provisioning wizard is displayed.
- Provide the following details for the profile identification:
  - Enter the name of the profile as *my\_iodom\_osp*.
  - Enter a suitable description for the profile.

- Select Logical Domain as the Subtype.

**Identify Profile** \* Indicates Required Field

\* Name: my\_jodom\_osp

Description:

\* Subtype: Subtype  
 Oracle VM Server for SPARC  
**Logical Domain**  
 Oracle Linux  
 Oracle VM Server for x86  
 Red Hat Linux  
 SUSE Linux  
 JET Template  
 Solaris SPARC  
 Solaris x86

Target Type: Target Type  
**VirtualMachine**

Click **Next** to specify the provisioning parameters.

5. Select the following OSP parameters:
  - Oracle Solaris 11.1 OS version from the list.  
Select the SRU 12.5.0 from the list.
  - Software Group as `solaris-small-server` from the list.

**Specify OSP Parameters** \* Indicates Required Field

Select an OS image from the list of images available.  
 Select one system software group and any optional feature software groups that this OS profile installs. Use Ctrl+Click and Shift+Click to select multiple software groups.

\* OS Image: Oracle Solaris 11.1 sparc (AI)

\* OS Image Version: SRU 12.5.0

\* Software Group:

- System Software Groups
  - pkg://solaris/group/system/solaris-small-server**
  - pkg://solaris/group/system/solaris-large-server
  - pkg://solaris/group/system/solaris-desktop
- Feature Software Groups
  - pkg://solaris/group/feature/trusted-desktop
  - pkg://solaris/group/feature/storage-server
  - pkg://solaris/group/feature/storage-nas
  - pkg://solaris/group/feature/storage-avs

Include Custom Scripts

Solaris 11 Update Profile:

Click **Next** to specify the OS Setup.

6. Specify the OS setup parameters:
  - Enter the time zone, language, terminal type, console serial port, and console baud rate.
  - Enter the root password.
  - The NFS4 domain is set to dynamic in this example. If a naming service is configured in your environment, enter the NFS4 domain value.

**Specify OS Setup** \* Indicates Required Field

Specify language, time zone, terminal type, console and root password for the OS.

Language: U.S.A. (en\_US.ISO8859-15) ▼

Time Zone: GMT ▼

Terminal Type:

Console Serial Port: ttya ▼

Console Baud Rate: 9600 ▼

NFS4 Domain: dynamic

\* Root Password:

\* Confirm Password:

Manual Net Boot

Click **Next**.

7. Create a user account to SSH to the OS after provisioning. Provide a user name and password for the account.

**Specify User Account** \* Indicates Required Field

Specify user account to be used for the OS.

\* Username: admin

Full Name:

\* Password:

\* Confirm Password:

Click **Next** to specify whether you want to use iSCSI disks for OS provisioning.

8. Do not select the option to use iSCSI disk as this scenario does not involve the use of iSCSI disk for OS provisioning.

**Specify iSCSI Disk Usage**

Specify if iSCSI disk is used for OS provisioning.

Use iSCSI Disk

Click **Next**.

9. The root (/) and a swap file system are defined by default. Click the **Add** icon to add more ZFS file systems.

UFS File System Type is available when you are provisioning Oracle Solaris 10 1/13 OS.

### Specify File System Layout

Specify the file systems that need to be created.

**File Systems (2)**

File System Type	Mount Point	Device	Size (MB)
swap	swap	rpool	4096
zfs	/	rootdisk.s0	Remaining unused space

NOTE: To allocate the remaining unused disk space to a specific file system, do not enter any value for its size (leave the size field blank).

Click **Next** to specify the name service.

- If you have a naming service in place, select the appropriate one and provide the setup details. In this procedure, select **None** for the naming service.

If you have any naming service in your setup, refer to the help in the wizard or the *Oracle Enterprise Manager Ops Center Feature Reference Guide* for information about specifying the naming services.

### Specify Naming Services

\* Indicates Required Field

Specify the name service, the domain name, and the corresponding name server.  
 If the name service is specified, the hostname would be automatically derived from it.  
 Otherwise, the hostname will be generated by substituting the '.' in the target's IP address with '.'

Name Service:  NONE  DNS  NIS  NIS+  LDAP

Click **Next** to view the summary of the parameters selected for the profile.

- Review the parameters selected for the profile and click **Finish** to create the OS provisioning profile.

### Summary

OS Image: Oracle Solaris 11.1 sparc (SRU 12.5.0) (AI)

Software Group: pkg://solaris/group/system/solaris-small-server

Language: U.S.A. (en\_US.ISO8859-15)

Time Zone: GMT

Terminal Type:

Console Serial Port: ttya

Console Baud Rate: 9600

NFS4 Domain: dynamic

Manual Net Boot:

Solaris 11 Update Profile:

Username: admin

Full Name:

Use iSCSI Disk:

**File Systems (2)**


File System Type	Mount Point	Device	Size (MB)
swap	swap	rpool	4096
zfs	/	rootdisk.s0	Remaining unused space

Name Service: NONE

12. Click **Finish** to create the OS provisioning profile.

## Create OS Configuration Profile

1. Select the **Plan Management** section and expand **Profiles and Policies**.
2. Select **OS Configuration** and click **Create Profile** in the Actions pane.
3. Enter the following details to identify the profile:
  - Name and description of the profile.
  - Select Logical Domain as the Subtype and Virtual Machine as the Target Type.

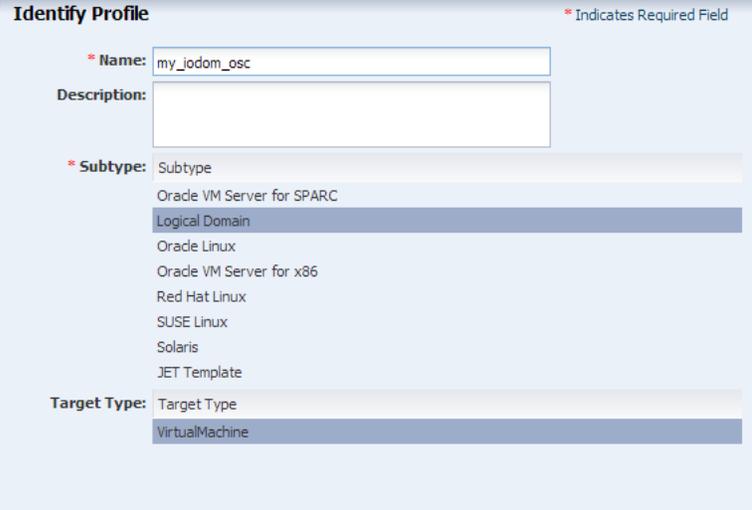


Click **Next** to set the OS Management properties

4. Select to manage the OS automatically and deploy the Agent Controller to manage the asset.

Select the option **Enable Multiplexed I/O** so that you can associate block storage libraries such as FC and iSCSI for storage with the OS.

Deselect the option **Enable Single Root I/O Virtualization (SR-IOV)**, the option is only applicable to root domains.

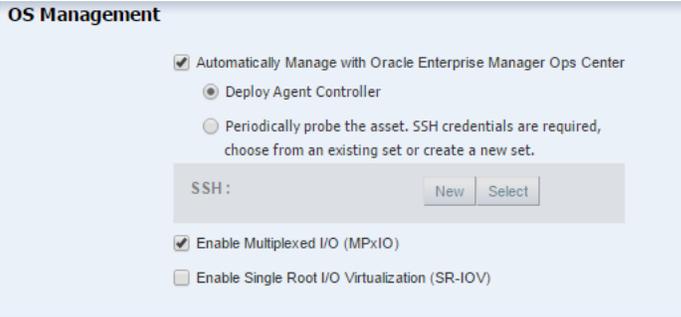

Click **Next** to specify the networking details.

5. Select **None** as the networking option for the OS.

**Specify Networking**

Select the network interfaces that the target system will use after the OS is configured.

Link Aggregation and IPMP are only available for Oracle Solaris operating systems.

Use Link Aggregation  
 Use IPMP  
 None

Click **Next**.

6. Enter the number of network interfaces that must be configured on the OS. The details of the interfaces are collected while deploying the plan.

In this example, enter one interface that will be configured on the OS.

**Specify Network Interfaces** \* Indicates Required Field

Specify the number of network interfaces that you want to use on the OS.

\* Number of Interfaces:

Click **Next** to view the summary of the parameters selected for OS configuration.

7. Review the parameters and click **Finish** to create the OS configuration profile.

**Summary**

Review the properties of the profile. Click Finish to save the profile.

Name: my\_iodom\_osc

Description:

Target Type: VirtualMachine

Automatically Manage with Oracle Enterprise Manager

Ops Center:

Deploy Agent Controller:

Enable Multiplexed I/O (MPxIO):

Number of Interfaces: 1

## Create Provision OS Deployment Plan


Create a Provision OS plan that includes the OS Provisioning and OS Configuration profile created in the previous procedures. The provision plan will then be applied on the created I/O domain.

### To Create a Provision OS Plan

1. Select **Plan Management** section in the Navigation pane.
2. Expand **Deployment Plans** and select **Provision OS**.
3. Click **Create Deployment Plan** in the Actions pane.

4. In the Create Deployment Plan window, enter the following details:
  - Name of the plan as *iodom\_osp*.
  - Description for the plan.
  - Select **Stop at failure** for Failure Policy.
  - Select the OS Provisioning Profile and the OS Configuration Profile created for provisioning OS on the I/O domain.

Click **Save** to save the deployment plan.

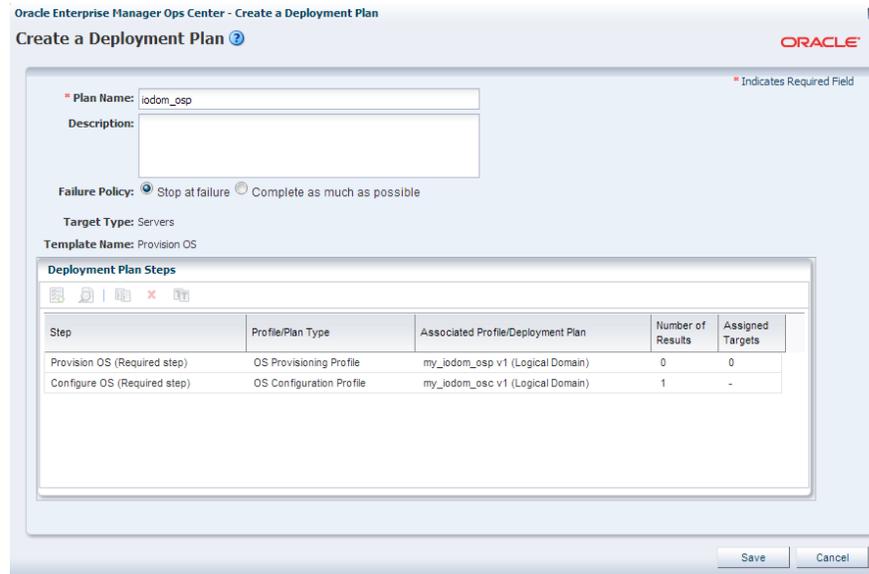

## Apply Provision OS Deployment Plan On I/O Domain

For provisioning OS on the I/O domain, two important parameters are required:

- **Boot interface details:** The details can be either the network port number of the PCIe Endpoint device, or the MAC address of the interface.
- **OS Provisioning IP Address:** The IP address that must be used on the OS. If you have more than one interfaces defined to be used on the OS, the network slot and the IP address for each network connection.

In this scenario, the I/O domain creation and OS provisioning plan are not combined in a single plan. Hence, the available PCIe Endpoint devices are filtered and provided in the boot interface list.

### To Deploy the Provision OS Plan on the I/O Domain

1. Select the I/O domain in the Assets tree of the Navigation pane.
2. Click **Install Server** in the Actions pane.  
The Install Server window is displayed.
3. Select the OS provisioning plan created for deploying the OS and apply the plan in minimal interaction mode.  
Click **Apply Plan**.



- The OS deployment wizard is displayed. Select not to review the steps that are not included in the deployment plan.



Click **Next** in the Introduction step.

- The plan consists of the OS provisioning profile and OS configuration profile. The application of the plan starts with the Provision OS step.



Click **Next** to define the boot interface resources.

- In the Boot Interface Resource Assignment step, enter the following details:
  - Select the network from the list. The networks that are discovered and managed in Oracle Enterprise Manager Ops Center are listed.
  - Select the PCIe Endpoint device that provides the network interface for the network connection.

In this example, select PCIE9 (pci\_1) as the Controller. The Controller displays only those devices that are available for network connection. It does not display all the devices.

- Select the interface from the list of interfaces available for that PCIe slot. In this example, the net\_3 is the network interface that is physically connected to the selected network.
- Provide the IP address for the boot interface.
- (Optional) Provide the host name for the target.

**Boot Interface Resource Assignments**

Review or specify the network resources for the boot interface of each target.

Identify Network Interface by MAC Address

Boot Interfaces					
Target	Network	Controller	Interface	IP	Primary Hostname
io_domain1	192.0.2.0/24.1	PCIE9(pci_1)	net_3	192.0.2.254	xvm-vhost509

Click **Next**.

7. Review the summary of information for OS provisioning and click **Next**.
8. The application of the OS configuration profile starts in the wizard. Click **Next**.

**Configure OS**

The following wizard steps collect values for the Configure OS step of the deployment plan targeting io\_domain1.



9. The boot interface network details are populated in this step. In this example, there was only one network interface selected to be configured on the OS. Therefore, the network resource is populated with the boot interface network details.

If you have selected more than one interface to be configured on the OS, the first interface is always overwritten by the boot interface network details. Always define the first interface as the boot interface. You can select the interface that you want to be the primary interface. Specify the network resources for the selected interfaces:

If you have selected more than one interface to be configured on the OS, then specify the network resources for the interfaces:

- Select the network in the **Network** column.
- Select the PCIe Endpoint device in the **Controller** column. The PCIe Endpoint device provides the network interface for communication.

- Select the network interface.
- Enter the IP address for OS provisioning.
- Select the primary interface.

**Network Resource Assignments**

Review or specify the network resources for each target.

Target: root\_dom1

**Network Interfaces (1)**

Network	Controller	Interface	IP	Primary
192.0.2.0/24.1	PCIE9(pci_1)	net_3	192.0.2.254	<input checked="" type="radio"/>

Click Next.

10. In this example, the OS is not placed in a server pool for zones.

**Server Pool** \* Indicates Required Field

The server that will be installed can be assigned to a Solaris Container SPARC Server Pool. Select an assignment choice:

Do not assign to a Server Pool. The new server will execute in stand-alone mode. You may add the server to a pool at a later time.

Assign to a compatible Server Pool.

Create a new Server Pool based on the attributes of the new server and assign the server, using default pool settings. The pool settings can be changed later after it has been created.

\* Server Pool Name:

Storage Library	Type	Description
LDomNAS	NAS	created by auto tests
MyFCLib	SAN	fc://3e8bb493-867e-44c2-aa0e-...
MvNasZnnel ib	NAS	created by auto tests

Click Next.

11. Review the summary of OS configuration parameters and click Next.

12. Schedule the job to run now and click Apply.


**Schedule Job**

Select when the job should be scheduled to execute the deployment plan on the selected targets.


Now

At a later date/time

The provisioning job is executed and the I/O domain is provisioned with the OS and displayed in the UI:

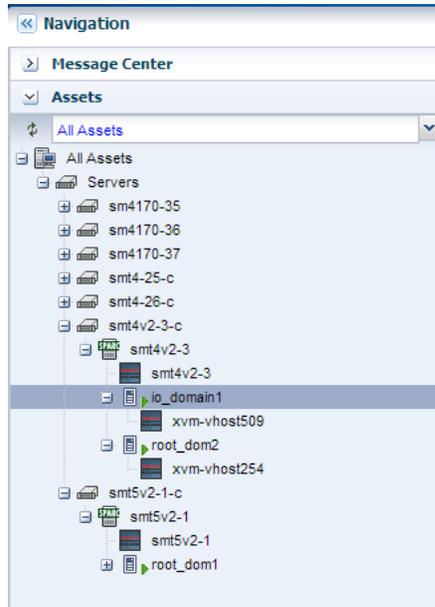

You can view the **I/O Resources** tab of the I/O domain that displays the details of the PCIe Endpoint device allocated to the domain:

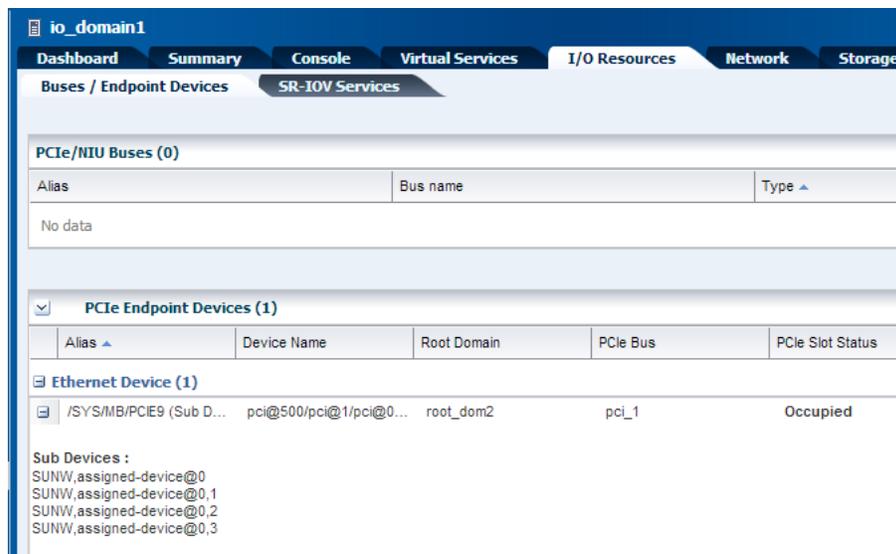

From the control domain, *smt4v2-3*, you can also view that the PCIe Endpoint device allocated to the I/O domain is from the PCIe bus assigned to the root domain.

Alias	Bus name	Type	Domain
pci_1	pci@500	BUS	rootdom1
pci_0	pci@400	BUS	primary
niu_0	niu@480	NIU	primary
niu_1	niu@580	NIU	primary

Alias	Device Name	Root Domain	PCIe Bus	PCIe Slot Status	Domain
<b>Ethernet Device (3)</b>					
/SYS/MB/NET0 (Sub Devices : 16)	pci@400/pci@1/pci@0/pci@4	primary	pci_0	Occupied	primary
/SYS/MB/NET2 (Sub Devices : 16)	pci@500/pci@1/pci@0/pci@5	rootdom1	pci_1	Occupied	rootdom1
/SYS/MB/PCIE9 (Sub Devices : 4)	pci@500/pci@1/pci@0/pci@0	rootdom1	pci_1	Occupied	iodom1
<b>Fibre Channel Device (2)</b>					
/SYS/MB/PCIE1 (Sub Devices : 4)	pci@500/pci@2/pci@0/pci@a	rootdom1	pci_1	Occupied	rootdom1
/SYS/MB/PCIE8 (Sub Devices : 4)	pci@400/pci@1/pci@0/pci@c	primary	pci_0	Occupied	primary
<b>SCSI Device (1)</b>					
/SYS/MB/SASHBA (Sub Devices : 4)	pci@400/pci@2/pci@0/pci@e	primary	pci_0	Occupied	primary
<b>[Unrecognized Device Type] (7)</b>					
/SYS/MB/PCIE0	pci@400/pci@2/pci@0/pci@8	primary	pci_0	Empty	primary
/SYS/MB/PCIE2	pci@400/pci@2/pci@0/pci@4	primary	pci_0	Empty	primary
/SYS/MB/PCIE3	pci@500/pci@2/pci@0/pci@6	rootdom1	pci_1	Empty	rootdom1
/SYS/MB/PCIE4	pci@400/pci@2/pci@0/pci@0	primary	pci_0	Empty	primary
/SYS/MB/PCIE5	pci@500/pci@2/pci@0/pci@0	rootdom1	pci_1	Empty	rootdom1
/SYS/MB/PCIE6	pci@400/pci@1/pci@0/pci@8	primary	pci_0	Empty	primary
/SYS/MB/PCIE7	pci@500/pci@1/pci@0/pci@6	rootdom1	pci_1	Empty	rootdom1

## What's Next?

You can provide virtual I/O resource services to other guest domains in the control domain. You can also create zones on these domain and provide the resources to the zones.

## Related Articles and Resources

The Oracle Enterprise Manager Ops Center 12c documentation is located at [http://docs.oracle.com/cd/E40871\\_01/index.htm](http://docs.oracle.com/cd/E40871_01/index.htm).

Refer to the following resources for more information:

- *Oracle Enterprise Manager Ops Center Feature Reference Guide*
- *Oracle Enterprise Manager Ops Center Administration Guide*
- *Oracle Enterprise Manager Ops Center Feature Reference Appendix Guide*
- *Oracle Enterprise Manager Ops Center Command Line Interface Guide*

See <http://www.oracle.com/technetwork/documentation/vm-sparc-194287.html> for Oracle VM Server for SPARC documentation.

See the Operate How To available at [http://docs.oracle.com/cd/E40871\\_01/nav/operatehowto.htm](http://docs.oracle.com/cd/E40871_01/nav/operatehowto.htm).

See the Deploy How To available at [http://docs.oracle.com/cd/E40871\\_01/nav/deployhowto.htm](http://docs.oracle.com/cd/E40871_01/nav/deployhowto.htm).

## Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

## Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit

<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit

<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

---

Oracle Enterprise Manager Ops Center Configuring and Installing I/O Domains, 12c Release 2 (12.2.2.0.0)  
E41836-03

Copyright © 2007, 2014, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.