

Configuring Weblogic Server

Oracle Banking Payments

Release 14.5.0.0.0

Part No. F42401-01

[Jan] [2022]



Table of Contents

TABLE OF CONTENTS	1-1
1. INTRODUCTION	1-1
1.1 PURPOSE OF THIS DOCUMENT	1-1
1.2 WEBLOGIC SERVER OVERVIEW	1-1
1.3 PRE-REQUISITES	1-4
2. DOMAIN CONFIGURATION	2-1
2.1 DOMAIN CREATION	2-1
2.2 PACK AND UNPACK DOMAIN.....	2-10
2.3 START ADMIN SERVER.....	2-11
2.4 START NODE MANAGER	2-11
3. CLUSTER CONFIGURATION.....	3-1
3.1 MACHINES CONFIGURATION	3-2
3.2 DYNAMIC CLUSTER CREATION	3-5
3.3 MANAGED SERVER TEMPLATE CONFIGURATION	3-9
3.3.1 Logging.....	3-9
3.3.2 HTTP Logging.....	3-11
3.3.3 Stuck Tread Max Time	3-11
4. TUNING	4-1
4.1 GENERAL PARAMETERS	4-1
4.2 JVM TUNING	4-1
5. START MANAGED SERVERS.	5-1
6. DATA SOURCE CREATION AND JDBC CONFIGURATION	6-1
6.1 SETUP REQUIRED FOR OCI DRIVER	6-1
6.2 DATA SOURCE CREATION: NON XA.....	6-2
6.3 XA DATASOURCE.....	6-6
6.4 JDBC PARAMETERS TUNING.....	6-10
7. JMS RESOURCE CREATION.....	7-1
8. ORACLE WEBLOGIC LOAD BALANCING	8-1
9. FREQUENTLY ASKED QUESTIONS.....	9-1
9.1 MACHINE STATUS IS UNREACHABLE	9-1
9.2 HOW TO RESTART NODE MANAGER?	9-1
9.3 SCALING UP DYNAMIC CLUSTER	9-1
9.4 SESSION TIMEOUT	9-3

1. Introduction

1.1 Purpose of this Document

The purpose of this document is to explain the steps required for Configuration and applying best practices in cluster mode for

- Weblogic Version 12.2.1.4.0
- JDK 1.8.0_241

1.2 WebLogic Server Overview


This section of the document provides brief explanation on the main components involved in WebLogic server

Domain


A domain is the basic administration unit for WebLogic Server instances. A domain consists of one or more WebLogic Server instances (and their associated resources) that is managed with a single Administration Server. Multiple domains can be defined based on different system administrators' responsibilities, application boundaries, or geographical locations of servers. Conversely, a single domain can be used to centralize all WebLogic Server administration activities.

Each WebLogic Server domain must have one server instance that acts as the Administration Server. Administration Server can be used via the Administration Console or using the command line for configuring all other server instances and resources in the domain.

WebLogic Domain Structure

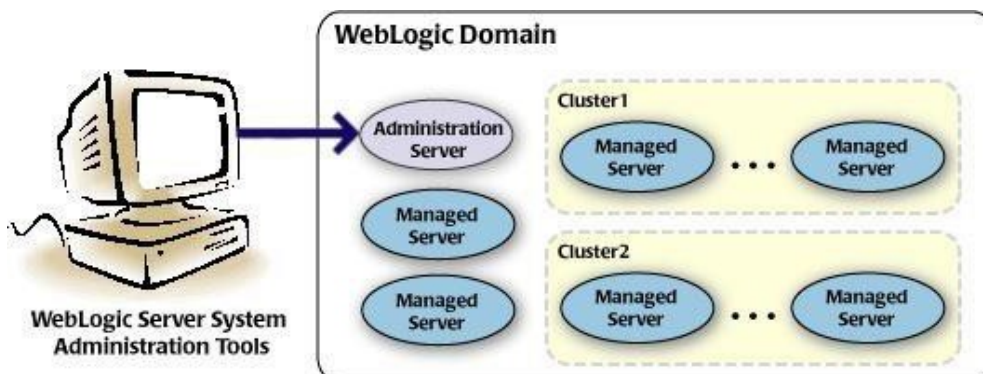

Weblogic 12c Domain Overview

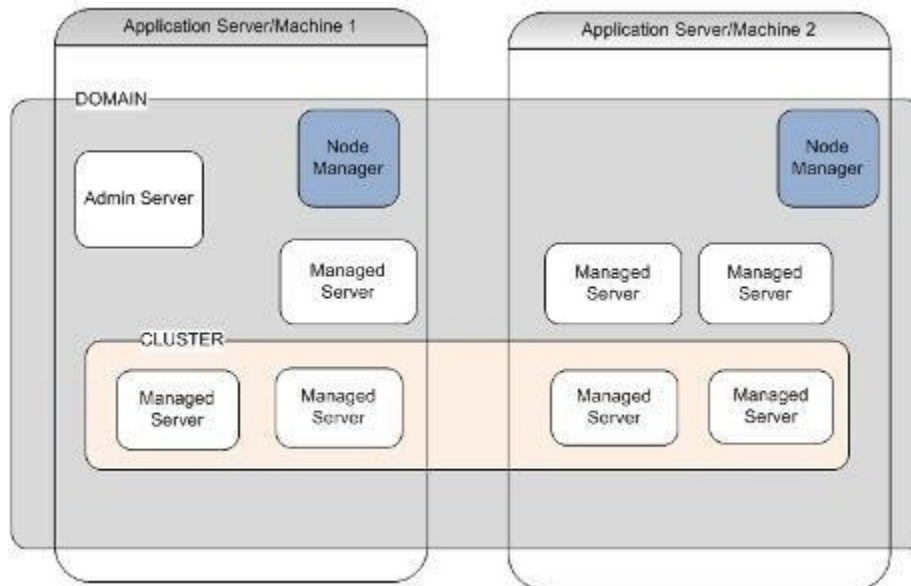

Administration Server

A domain includes one WebLogic Server instance that is configured as an Administration Server. All changes to configuration and deployment of applications are done through the Administration Server. The Administration Server provides a central point for managing the domain and providing access to the WebLogic Server administration tools.

These tools include the following:

- WebLogic Server Administration Console: Graphical user interface to the Administration Server.
- WebLogic Server Node Manager: A Java program that lets you start and stop server instances - both Administration Servers and Managed Servers - remotely, and to monitor and automatically restart them after an unexpected failure.

Admin server start mode needs to be configured as Production Mode.

Managed Server

In a domain, server instances other than the Administration Server are referred to as Managed Servers. Managed servers host the components and associated resources that constitute your applications—for example, JSPs and EJBs.

When a Managed Server starts up, it connects to the domain's Administration Server to obtain configuration and deployment settings. In a domain with only a single WebLogic Server instance, that single server works as both the administration server and managed server.

Node Manager

The Managed Servers in a production WebLogic Server environment are often distributed across multiple machines and geographic locations.

Node Manager is a Java utility that runs as separate process from WebLogic Server and allows you to perform common operations tasks for a Managed Server, regardless of its location with respect to its Administration Server. While use of Node Manager is optional, it provides valuable benefits if your WebLogic Server environment hosts applications with high availability requirements.

If you run Node Manager on a machine that hosts Managed Servers, you can start and stop the Managed Servers remotely using the Administration Console or from the command line. Node Manager can also automatically restart a Managed Server after an unexpected failure.

Machine

A machine in the Weblogic Serve context is the logical representation of the computer that hosts one or more Weblogic Server instances(servers). The Admin Server uses the machine definitions to start remote servers through the Node Managers that run on those servers. A machine could be a physical or virtual server that hosts an Admin or Managed Server that belongs to a domain.

Managed Server Cluster

Two or more Managed Servers can be configured as a WebLogic Server cluster to increase application scalability and availability. In a WebLogic Server cluster, most resources and services are deployed to each Managed Server (as opposed to a single Managed Server,) enabling failover and load balancing.

The servers within a cluster can either run on the same machine or reside in different machines. To the client, a cluster appears as a single WebLogic Server instance.

Dynamic Cluster

A dynamic cluster is any cluster that contains one or more dynamic servers. Each server in the cluster will be based upon a single shared server template. The server template allows you to configure each server the same and ensures that servers do not need to be manually configured before being added to the cluster. This allows you to easily scale up or down the number of servers in your cluster without the need for setting up each server manually. Changes made to the server template are rolled out to all servers that use that template.

You cannot configure dynamic servers individually; there are no server instance definitions in the config.xml file when using a dynamic cluster. Therefore, you cannot override the server template with server-specific attributes or target applications to an individual dynamic server instance.

When configuring your cluster you specify the maximum number of servers you expect to need at peak times. The specified number of server instances is then created, each based upon your server template. You can then start up however many you need and scale up or down over time according to your needs. If you need additional server instances on top of the number you

originally specified, you can increase the maximum number of servers instances (dynamic) in the dynamic cluster configuration.


Server Templates

A single server template provides the basis for the creation of the dynamic servers. Using this single template provides the possibility of every member being created with exactly the same attributes. Where some of the server-specific attributes like Servername, listen-ports, machines, etc. can be calculated based upon tokens.

You can pre-create server templates and let Weblogic clone one when a Dynamic Cluster is created.

When none is available a server template is created with the Dynamic Cluster. The name and the listen ports are the only server template attributes that you provide during Dynamic Cluster creation.

Simplified Configuration with Scalability and Elasticity

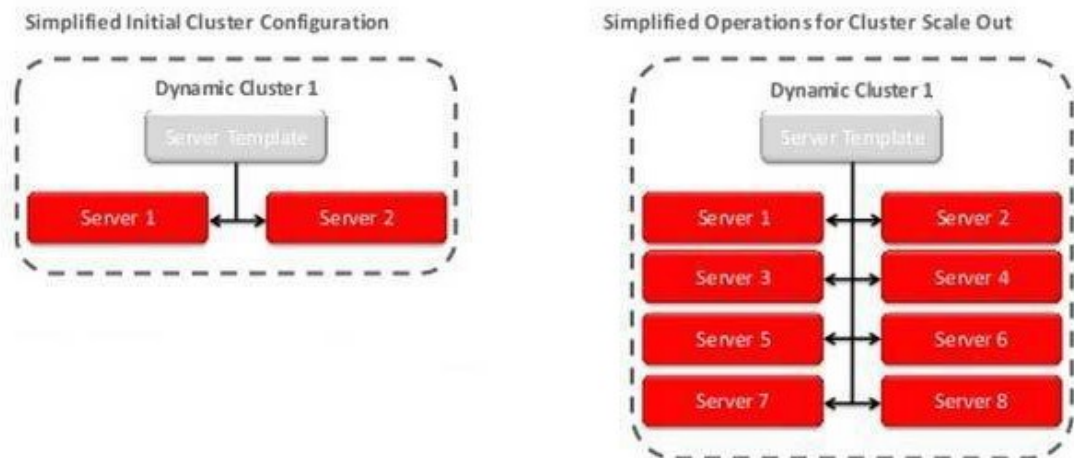

1.3 Pre-Requisites

In this document, we are going to create a domain with two managed servers. The managed servers are going to be created on two different physical servers (nodes). Note that, this document has been prepared based on a test conducted in Linux servers.

This requires Weblogic Server of same version to be installed on both the machines and services

Environment

2 servers where linux is installed, 1 will be primary where admin console will be running along with managed servers and the other where only managed servers will be.

Softwares

- 1) Oracle Weblogic Server 12.2.1.4.0 installed on both the machines under same folder structure.
- 2) JDK 1.8 Latest available version installed on both the machines. In this document JDK1.8.0_241 version is used.

Clock Synchronization

The clocks of both the servers participating in the cluster must be synchronized to within one second difference to enable proper functioning of jobs otherwise it will lead to session timeouts.

Enable Graphical User Interface (GUI)

Establish a telnet or SSH connection to primary server. Start X- manager (or any similar tool) in windows desktop. Export DISPLAY environment variable to the machine IP where x-manager is running.

Syntax: `export DISPLAY=<ip-address>:<port>` Test using `xclock`

2. Domain Configuration

2.1 Domain Creation


Weblogic domain creation and configuration will be done from primary server.

From primary server, launch the fusion Middleware configuration wizard using the command **config.sh** available under \$WLS_HOME/common/bin directory.

- 1) In the Welcome screen, select “**Create a new domain**” option. Enter the **domain name** and Click on **Next**.

The screenshot shows the 'Create Domain' step of the Oracle Fusion Middleware Configuration Wizard. The interface includes a navigation pane on the left with the following items: 'Create Domain' (selected), 'Templates', 'Administrator Account', 'Domain Mode and JDK', 'Advanced Configuration', 'Configuration Summary', 'Configuration Progress', and 'End Of Configuration'. The main area is titled 'Configuration Type' and contains the Oracle Fusion Middleware logo. The question 'What do you want to do?' is followed by two radio button options: 'Create a new domain' (selected) and 'Update an existing domain'. Below this, the 'Domain Location' field contains the path '/scratch/app/w12c/user_projects/domains/FCU8SDomain', which is highlighted with a red rectangle. A 'Browse' button is located to the right of the text field. At the bottom of the wizard, the 'Next >' button is highlighted with a red rectangle, indicating the next step in the process. Other buttons visible include '< Back', 'Finish', and 'Cancel'. A 'Help' button is located in the bottom left corner.

2) Select the required templates from **Available Templates** and click **Next**.

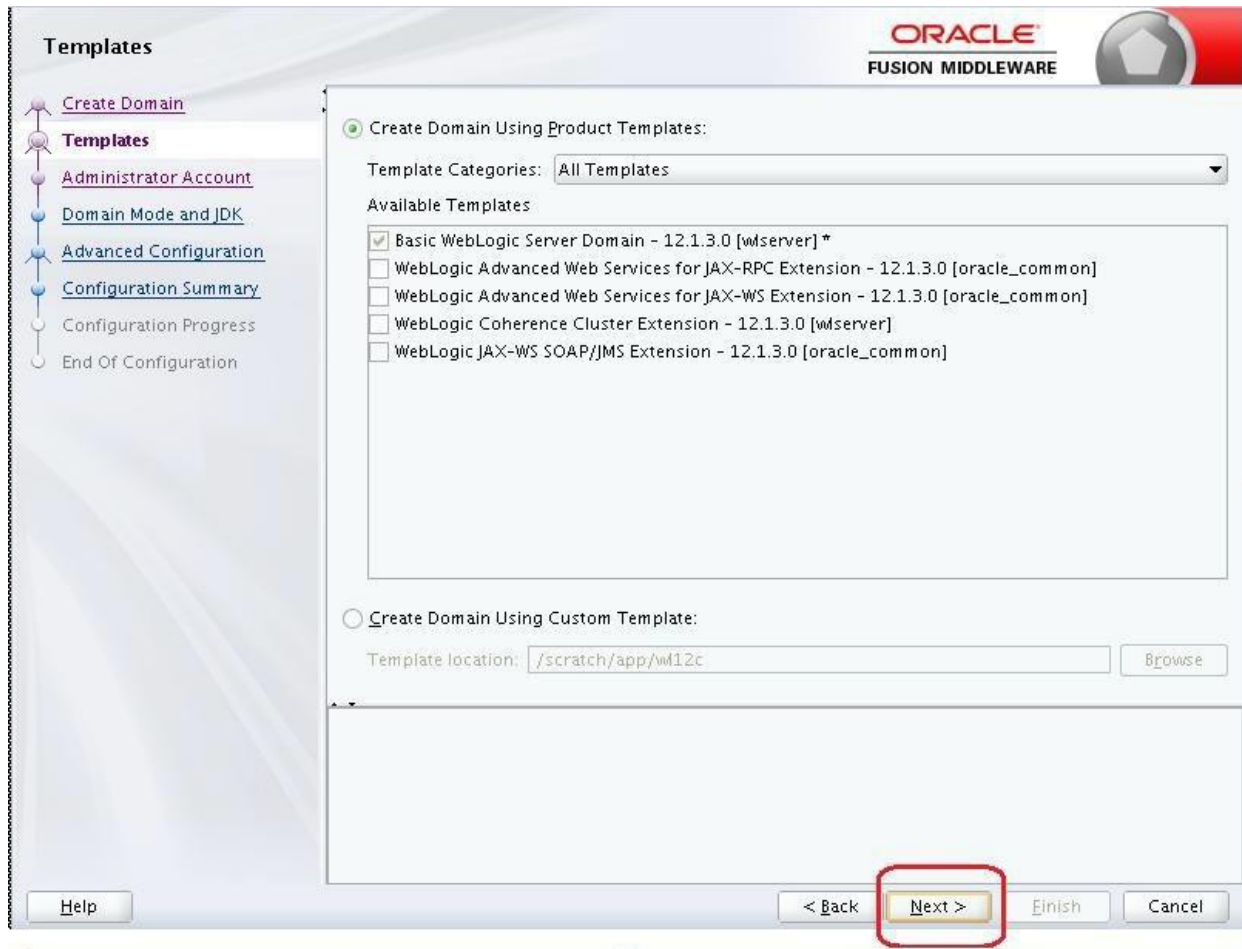

3) Specify Administrator **User Name** and **Password**.

- The specified credentials are used to access Administration console.
- You can use this screen to define the default WebLogic Administrator account for the domain. This account is used to boot and connect to the domain's Administration Server. Click **Next**.

Administrator Account

ORACLE
FUSION MIDDLEWARE

- Create Domain
- Templates
- Administrator Account**
- Domain Mode and JDK
- Advanced Configuration
- Configuration Summary
- Configuration Progress
- End Of Configuration

Name:

Password:

Confirm Password:


Must be the same as the password. Password must contain at least 8 alphanumeric characters with at least one number or special character.

Help < Back **Next >** Finish Cancel

4) Select Server Startup as **Production Mode** and the available JDKs. Click **Next**.

The screenshot shows the 'Domain Mode and JDK' configuration window. On the left is a navigation pane with the following items: 'Create Domain', 'Templates', 'Administrator Account', 'Domain Mode and JDK' (highlighted), 'Advanced Configuration', 'Administration Server', 'Node Manager', 'Configuration Summary', 'Configuration Progress', and 'End Of Configuration'. The main area is titled 'Domain Mode and JDK' and features the Oracle Fusion Middleware logo. Under 'Domain Mode', there are two radio buttons: 'Development' (selected) and 'Production'. Below this, there are two options: 'Utilize boot properties for username and password, and poll for applications to deploy.' (selected) and 'Require the entry of a username and password, and do not poll for applications to deploy.' Under 'JDK', there is a list of available JDKs: 'Oracle HotSpot 1.7.0_75 fusrjavafjdk1.7.0_75' (selected) and 'Other JDK location: C:...' with a 'Browse' button. At the bottom right, there are navigation buttons: '< Back', 'Next >' (highlighted with a red box), 'Finish', and 'Cancel'. A 'Help' button is located at the bottom left.

5) Select the check box adjacent to Administration Server and Node Manager Click **Next**.

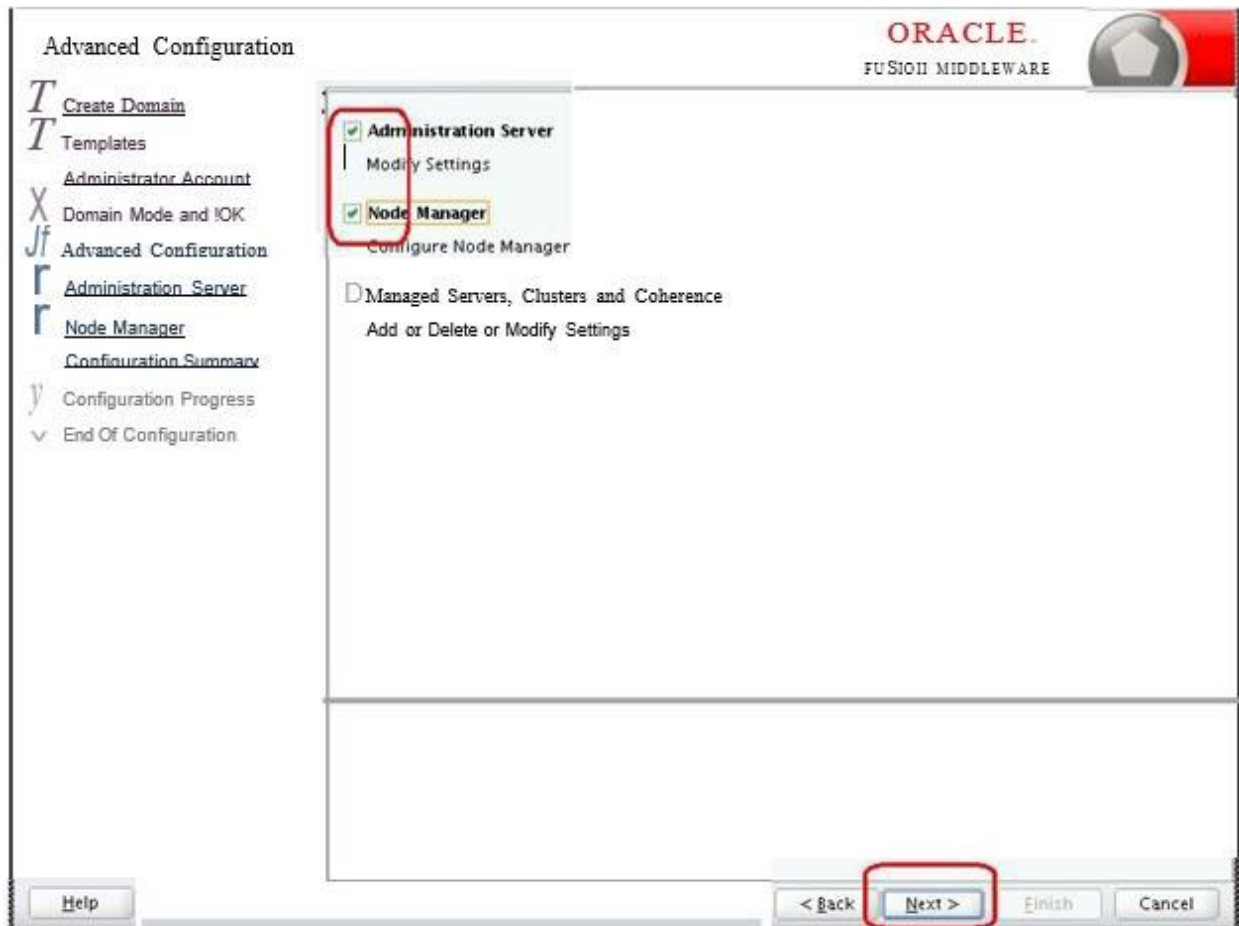

6) Specify the Administration server Listen address and Listen port.

Administration Server

ORACLE
FUSION MIDDLEWARE

Create Domain
Templates
Administrator Account
Domain Mode and JDK
Advanced Configuration
Administration Server
Node Manager
Configuration Summary
Configuration Progress
End Of Configuration

Server Name: AdminServer
Listen Address: All Local Addresses
Listen Port: 7001
Enable SSL:
SSL Listen Port: 7101

Port number must be between 1 and 65535, and different from listen port and coherence port.

Help < Back Next > Finish Cancel


Note: The default Listen port is 7001 and SSL port is 7101. This could be changed to any other available port. Ensure to make a note, of this port since the same is required for launching the Admin console, post domain creation.

Note: Check for the port availability using the command - `netstat -anp |grep <Port no>` The next screen navigates to **NodeManager configuration**.

7) Configure Node Manager

Select Per Domain Default Location option from Node Manager Type. And in the Node Manager Credentials, provide the username and password for the node manager Click **Next**.

ORACLE
FUSION MIDDLEWARE



Node Manager

- [Create Domain](#)
- [Templates](#)
- [Administrator Account](#)
- [Domain Mode and](#)
- [OK](#)
- [Advanced Configuration](#)
- [Administration Server](#)
- [Node Manager](#)

Configuration Summary

- [Configuration Progress](#)
- [End Of Configuration](#)

Node Manager Type

Per Domain Default Location

Per Domain Custom Location

Node Manager Home: [Browse](#)

Manual Node Manager Setup

Node Manager Credentials

Username:

Password:

Confirm Password:

Must be the same as the password. Password must contain at least 8 alphanumeric characters with at least one number or special character.

8) Verify the details and click **Create**. The domain creation process is initiated and the progress of completion is indicated.

Configuration Summary

ORACLE
FUSION MIDDLEWARE

- 1' Create Domain
- 1' Templates
- 1' Administrator Account
- 1' Domain Mode and !OK
- 1' Advanced Configuration
- 1' Administration Server
- X Node Manager
- Y Configuration Summary
- y Configuration Progress
- v End Of Configuration

View: Deployment

- FCU85Domain (/scratch/app/w12c/user_projects/)
 - Server
 - AdminServer


Name	Basic WebLogic Server Domain
Description	Create a basic WebLogic Server domain
Author	Oracle Corporation
Location	/scratch/app/w12c/w1server/commo

Select **Next** to accept the above options and start creating and configuring a new domain. To change the above configuration before starting Domain Creation, go back to the relevant page by selecting its name in left pane, or by using the **Back** button.


J:\help

< Back Next > **Create** Cancel

9) Click **Next**.

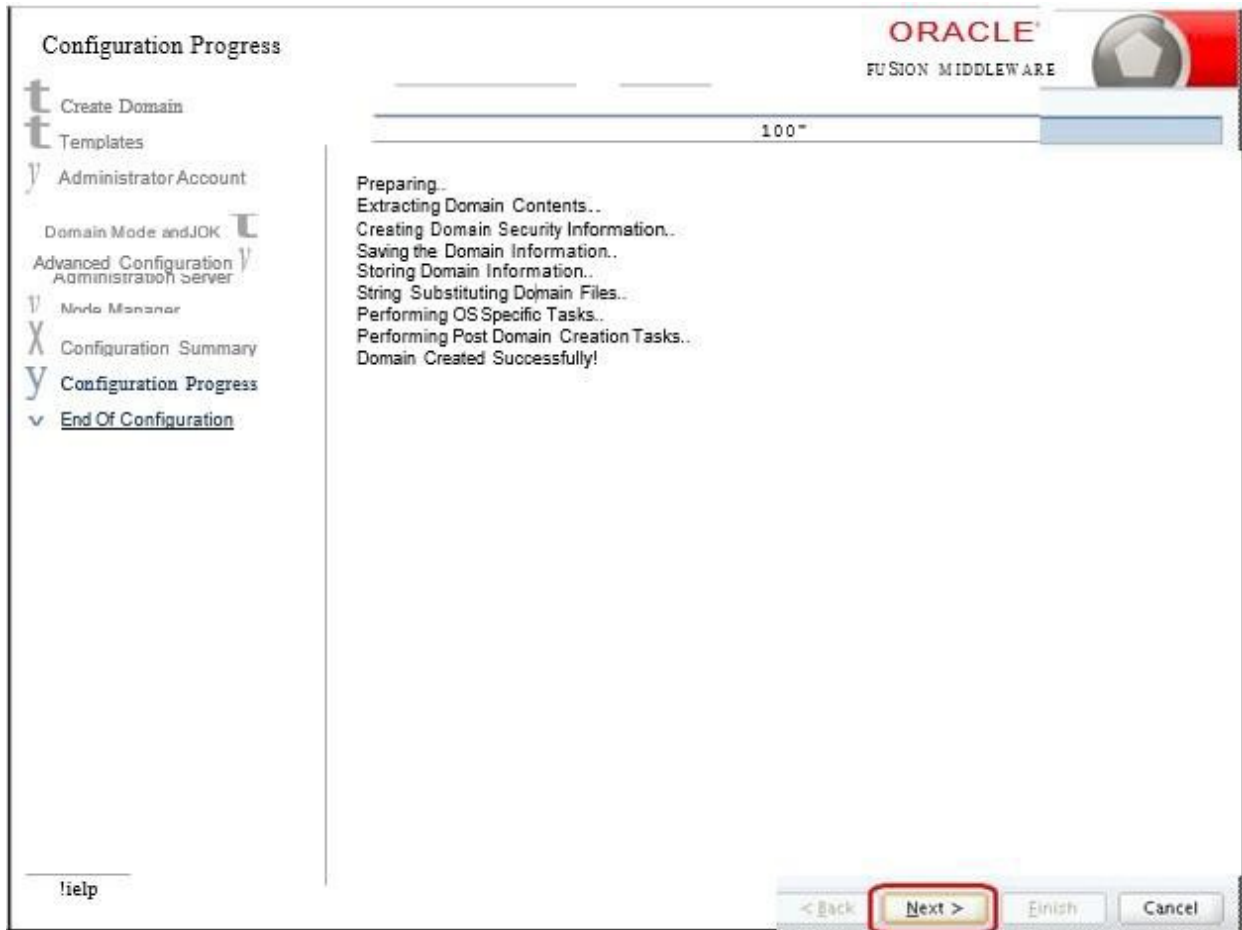

10) The Configuration Success message will be displayed as follows:

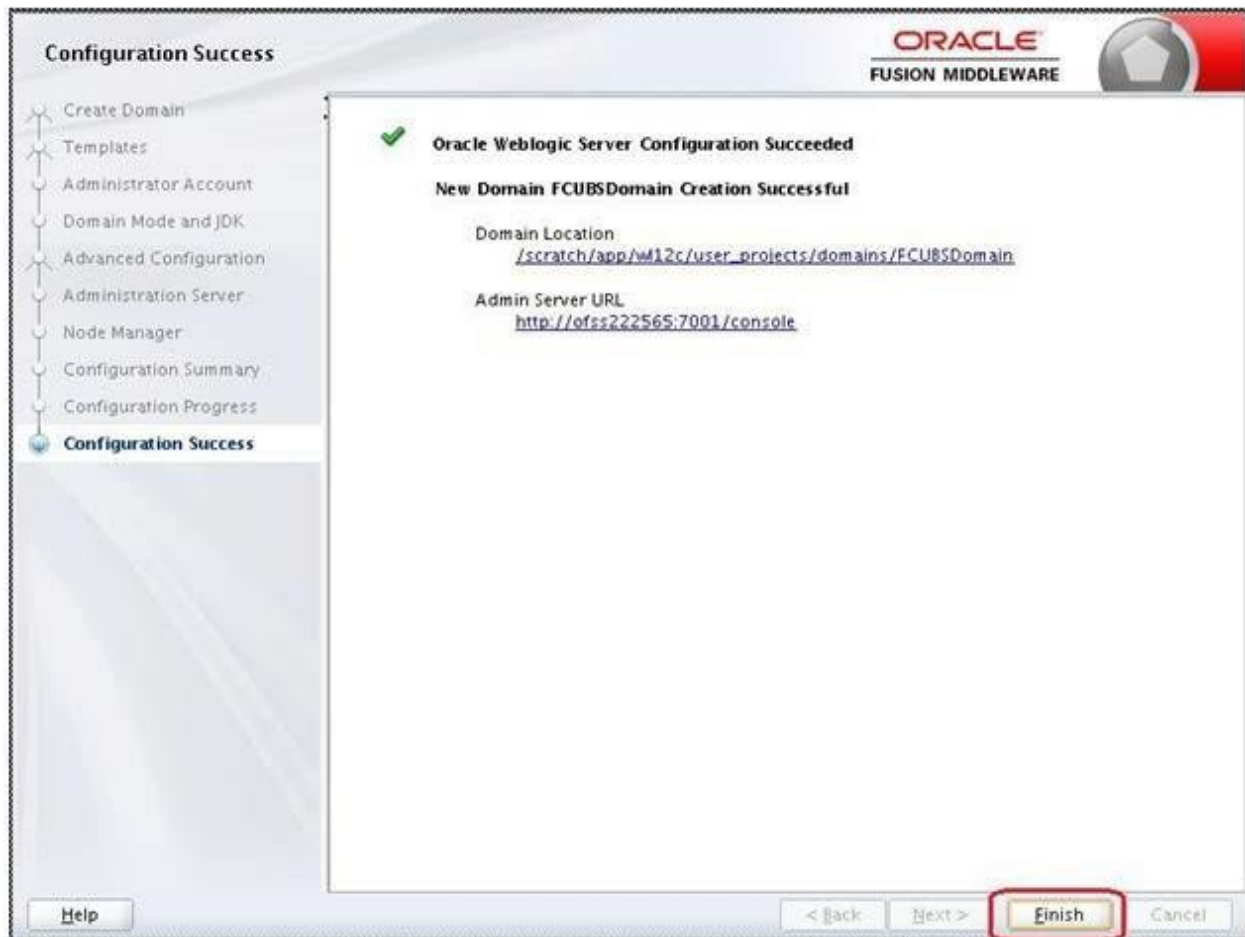

The Admin Server console URL is as indicated below:

`http://<IP address>:<admin console port>/console`

- <IP address >: Host on which domain was created.
- <admin console port> : Port specified in Administration Server configuration page. In this case the Admin Console URL is: `https://<server1hostname>:7101/console`

2.2 Pack and Unpack Domain

The domain structure is expected to be copied to the second server during domain creation. To copy the same, you can use pack and unpack utility provided under `$WLSHOME/common/bin`.

Pack

Pack domain in primary server:

```
./pack.sh -managed=true -domain=/scratch/app/wl12c/user_projects/domains/FCUBSDomain -  
template=/tmp/FCUBSDomain.jar -template_name="FCUBSDomain"
```

Unpack

Unpack FTP FCBUSDomain.jar in binary mode to secondary server under /tmp area and unpack the domain using unpack utility provided under \$WLSHOME/common/bin

```
./unpack.sh -domain=/scratch/app/wl12c/user_projects/domains/FCUBSDomain  
- template=/tmp/FCUBSDomain.jar
```

2.3 Start Admin server

Admin server is started on the primary server. Login to primary server and navigate to folder `$DOMAIN_HOME/bin` and execute **startWeblogic.sh**.

2.4 Start Node Manager

Node Manager needs to be started on both the servers. Before starting the node manager update ListenAddress to the Hostname/IP Address of the machine in nodemanager.properties located in folder `$DOMAIN_HOME/nodemanager`

To start the node manager login to the servers and navigate to folder `$DOMAIN_HOME/bin` and execute **NodeManager.sh**

3. Cluster Configuration

Dynamic Cluster configuration involves below steps

- 1) Machine Configuration
- 2) Dynamic Cluster Creation: In a normal WebLogic Cluster you define Managed Server and add them to Cluster. In Dynamic Cluster, you select number of Servers you want in Cluster and Server Template you wish to assign to Servers in this WebLogic Dynamic Cluster.
- 3) Server template modification: Servers (or Managed Server) that are part of WebLogic Dynamic Cluster will have properties taken from Server Template.

Modify server template for best practices parameters for Dynamic Servers (part of Dynamic Cluster), you modify Server Template that is applicable to Dynamic Cluster. These settings are applicable to all the managed servers.

- 4) Activate Changes which would automatically create the managed servers (as mentioned in the number of servers required parameter).

Calculate Number of Servers Required:

For every 50 logged in Oracle Banking users require one managed server of size 4GB. i.e. for 300 logged in Oracle Banking users, it is recommended to have 6 managed servers. Based on the logged in users that needs to be supported decide on the number of the managed servers required. This parameter is required later in the dynamic cluster creation.

3.1 Machines Configuration

- 1) Login into Admin Console and Navigate to FCUBSDomain → Environment → Machine and Click **New**.

ORACLE WebLogic Server Administration Console 12c

Home Log Out Preferences Record Help

Welcome, weblogic Connected to: FCUBSDomain

Home > Summary of Machines

Summary of Machines

A machine is the logical representation of the computer that hosts one or more WebLogic Server instances (servers). WebLogic Server uses configured machine names to determine the optimum server in a cluster to which certain tasks, such as HTTP session replication, are delegated. The Administration Server uses the machine definition in conjunction with Node Manager to start remote servers.

This page displays key information about each machine that has been configured in the current WebLogic Server domain.

Customize this table

Machines

Click the **Lock & Edit** button in the Change Center to activate all the buttons on this page.

New Clone Delete Showing 0 to 0 of 0 Previous | Next

Name	Type
There are no items to display	

New Clone Delete Showing 0 to 0 of 0 Previous | Next

Change Center

View changes and restarts

Click the Lock & Edit button to modify, add or delete items in this domain.

Lock & Edit

Release Configuration

Domain Structure

FCUBSDomain

- Environment
 - Servers
 - Clusters
 - Coherence Clusters
 - Machines**
 - Virtual Hosts
 - Work Managers
 - Startup and Shutdown Classes
- Deployments
- Services
- Security Realms
- Interoperability
- Diagnostics

How do I...

- Create and configure machines
- Assign server instances to machines
- Clone machines

- 2) Enter the machine name and click **Next**.

ORACLE WebLogic Server Administration Console 12c

Home Log Out Preferences Record Help

Welcome, weblogic Connected to: FCUBSDomain

Home > Summary of Machines

Create a New Machine

Back Next Finish Cancel

Machine Identity

The following properties will be used to identify your new Machine.

* Indicates required fields

What would you like to name your new Machine?

* Name: Machine1

Specify the type of machine operating system.

Machine OS: Other

Back Next Finish Cancel

Change Center

View changes and restarts

No pending changes exist. Click the Release Configuration button to allow others to edit the domain.

Lock & Edit

Release Configuration


Domain Structure

FCUBSDomain


- Environment
 - Servers
 - Clusters
 - Coherence Clusters
 - Machines**
 - Virtual Hosts
 - Work Managers
 - Startup and Shutdown Classes
- Deployments
- Services
- Security Realms
- Interoperability
- Diagnostics

How do I...

- 3) Enter the **Listen Address** and **Listen Port** (this is the port mentioned in nodemanager.properties file) and click **Finish**.

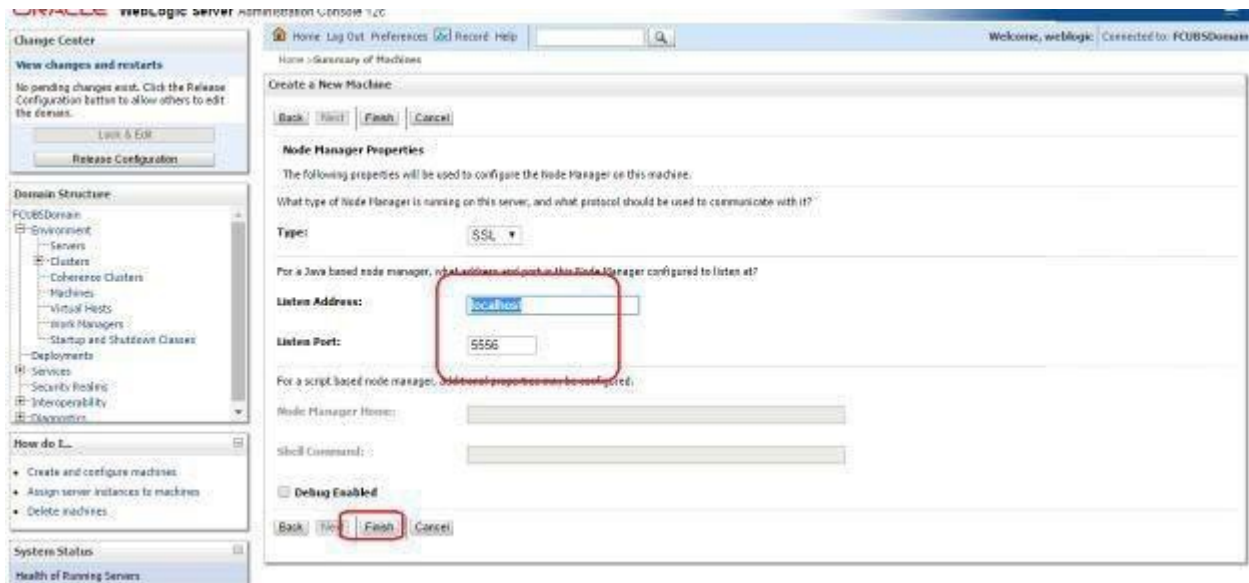

- 4) Machine is created

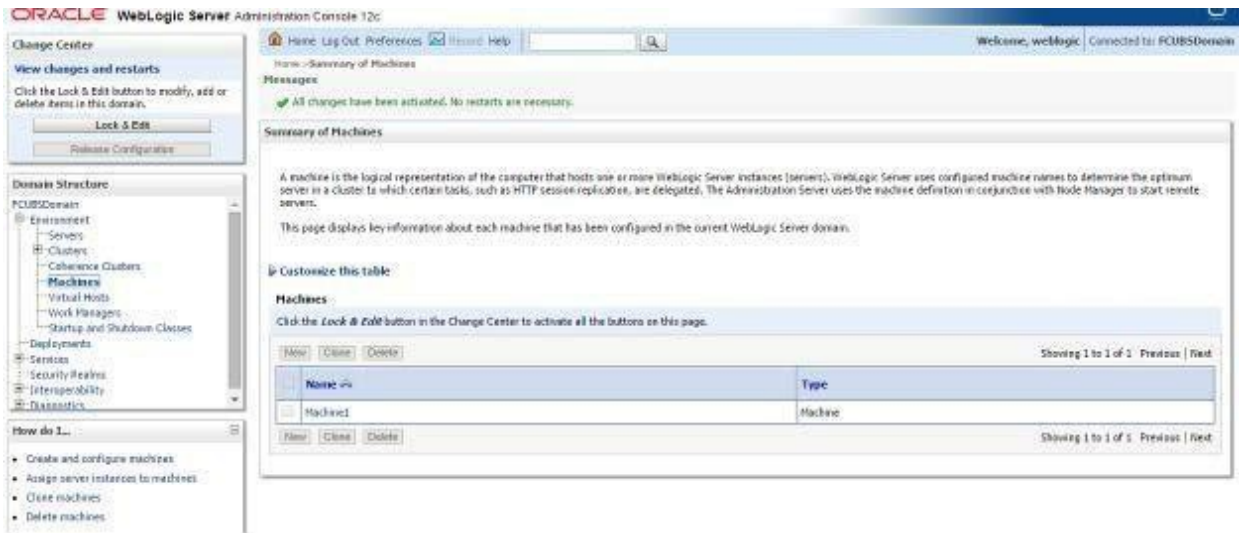


5) Similarly create a **new machine** entry for the other server.



Verifying machine status


Before starting the managed servers, ensure that the Node manager Status of all the machines are "Reachable".

In the console, navigate through Domain structure → Machines → machine1 → Monitoring → Node Manager Status. Status should be Reachable.

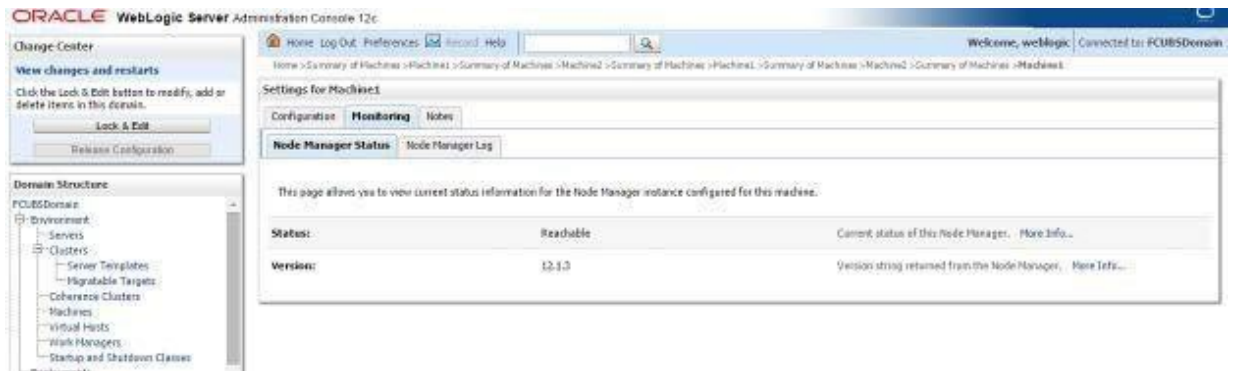


3.2 Dynamic Cluster Creation

- 1) Login into Admin Console and Navigate to FCUBSDomain → Environment → Clusters → New →select **Dynamic Cluster**.

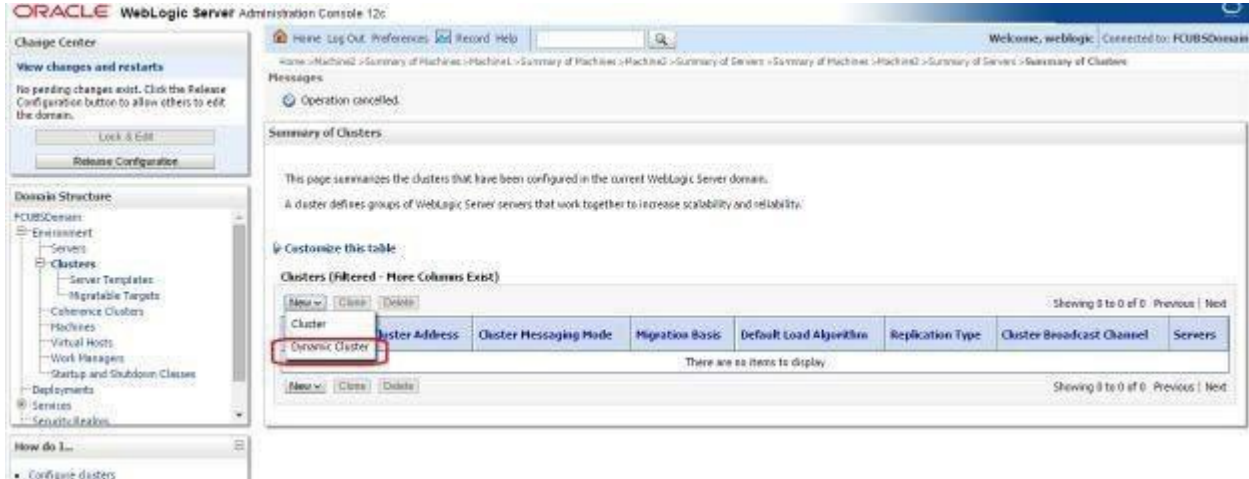

- 2) Enter the **Cluster Name** and Click on **Next**.

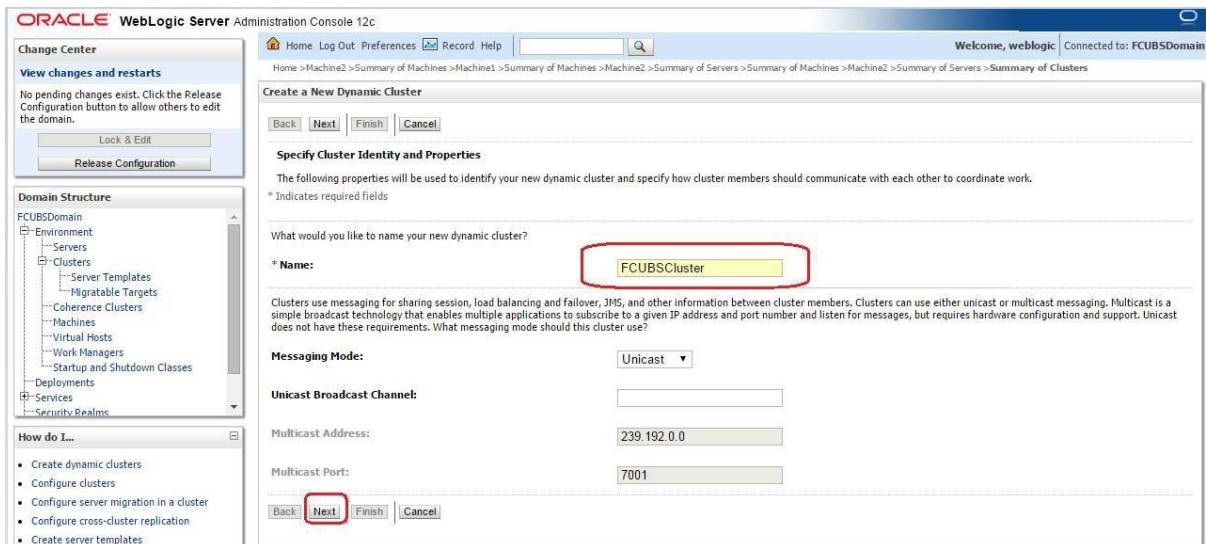

- 3) Enter the number of dynamic servers you want to configure, enter the server name prefix and click on **Next**.

ORACLE WebLogic Server Administration Console 12c

Home Log Out Preferences Record Help Welcome, weblogic Connected to: FCUBSDomain

Home > Machine2 > Summary of Machines > Machine1 > Summary of Machines > Machine2 > Summary of Servers > Summary of Machines > Machine2 > Summary of Servers > Summary of Clusters

Create a New Dynamic Cluster

Back Next Finish Cancel

Specify Dynamic Server Properties

The following properties will be used to specify the size and characteristics of your new dynamic cluster.

How many dynamic servers will you need at peak load?

Number of Dynamic Servers: 4

What naming convention would you like to use for new dynamic servers in this cluster?

Server Name Prefix: FCUBSMS

Server templates are used to configure the characteristics that are common to all dynamic servers in this cluster. Server templates are unique to a cluster and cannot be shared across clusters, so a new server template will be created to support this new cluster.

Back Next Finish Cancel

- 4) Select Machines that participate in domain, in this case all machines will be part of the domain, select Use any machine configured in this domain and click on **Next**.

ORACLE WebLogic Server Administration Console 12c

Home Log Out Preferences Record Help Welcome, weblogic Connected to: FCUBSDomain

Home > Machine2 > Summary of Machines > Machine1 > Summary of Machines > Machine2 > Summary of Servers > Summary of Machines > Machine2 > Summary of Servers > Summary of Clusters

Create a New Dynamic Cluster

Back Next Finish Cancel

Specify Machine Bindings

Associating dynamic servers with machines is essential if you intend to use Node Manager and the Administration Console (or WLST) to start server instances.

How do you want to distribute dynamic servers across machines?

Use any machine configured in this domain

Use a single machine for all dynamic servers


Selected Machines: Machine1

Use a subset of machines in this domain


Machine Name Match Expression:

Back Next Finish Cancel


- 5) Select the listen port for the first server in the dynamic cluster and then the SSL listener port for the first server in the dynamic cluster. The subsequent servers will be assigned with an incremental port number. Click **Next**.

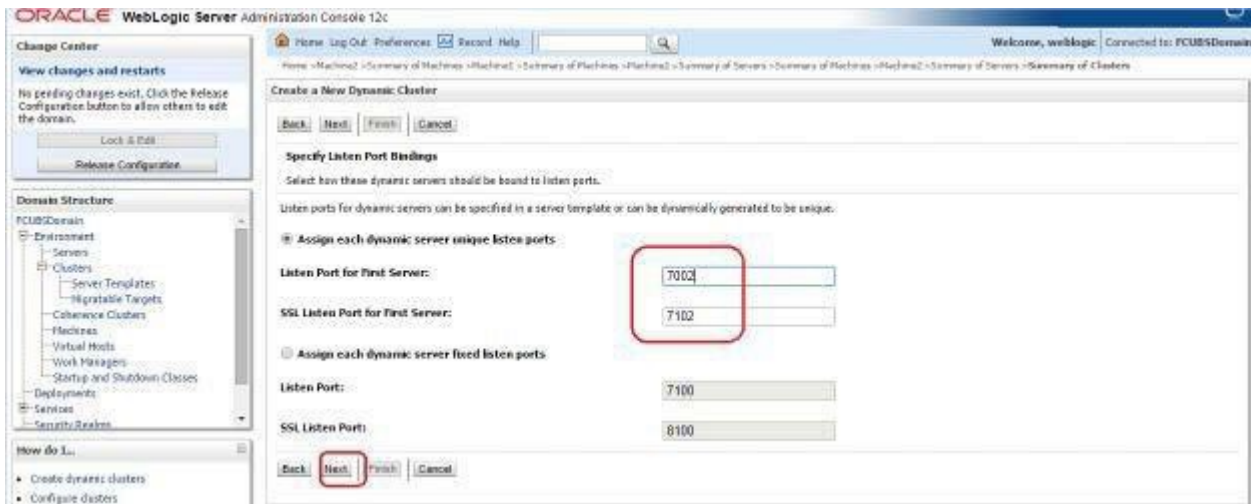


- 6) Summary of new Dynamic Cluster configuration is presented. Click **Finish** to create.

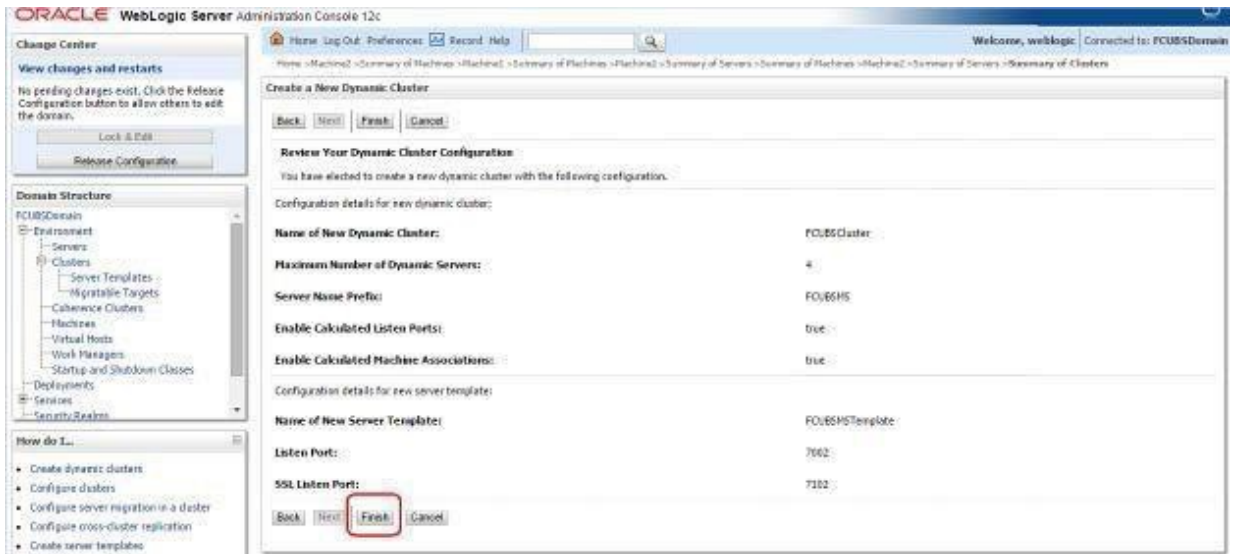

7) The Summary of Clusters screens should show the recently created Dynamic Cluster.

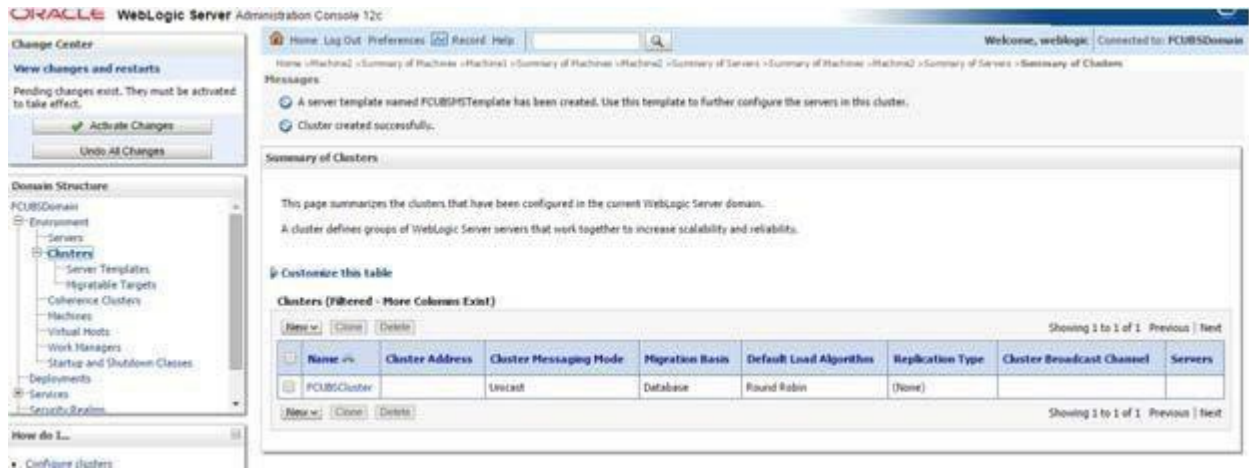

8) Upon Activate Changes would automatically create 4 managed servers.

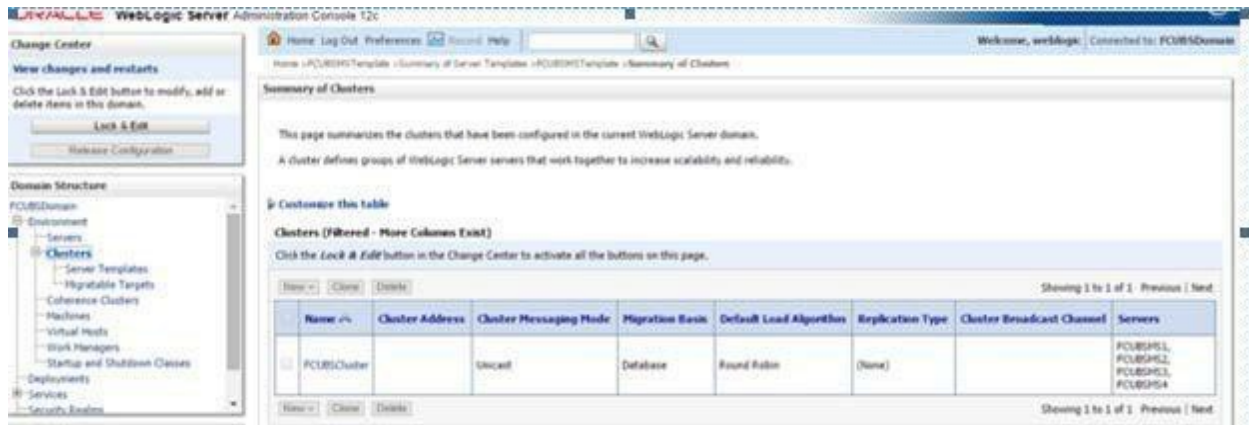

9) Navigate to FCUBSDomain → Environment → Servers tab and 4 new servers are created



3.3 Managed Server Template configuration

The server template created is modified to apply the below parameters


3.3.1 Logging

The process of log file writing in a Weblogic server can impact the performance. Hence, you need to keep the logging to minimum in a production environment.


Update below parameters by in Logging Screen

Minimum Severity to log	Warning
Log file Severity level	Warning
Standard Out Severity level	Critical
Domain broadcaster Severity level	Critical

1) Navigate to FCUBSDomain → Environment → Clusters

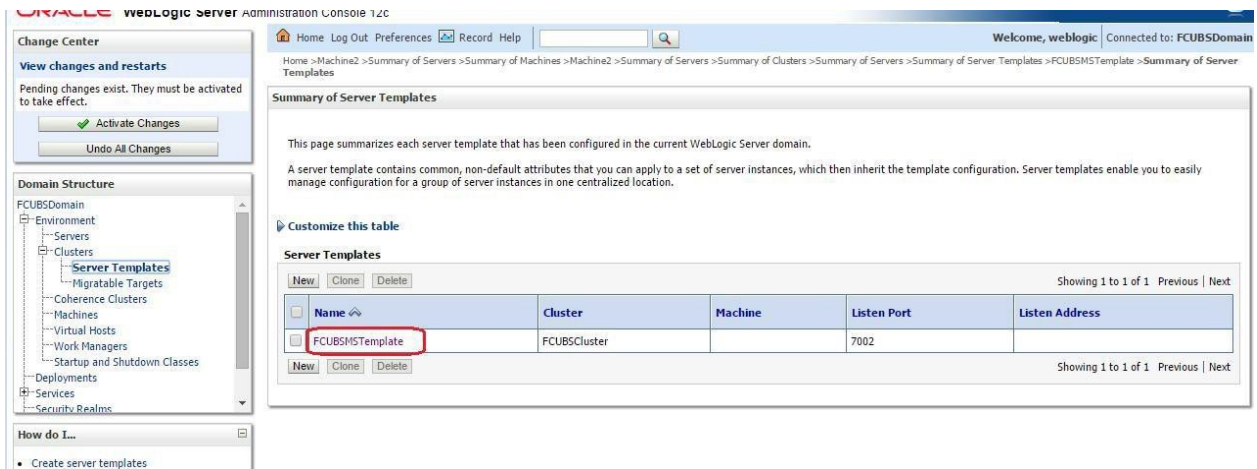

2) Select FCUBSTemplate and navigate to Logging → General

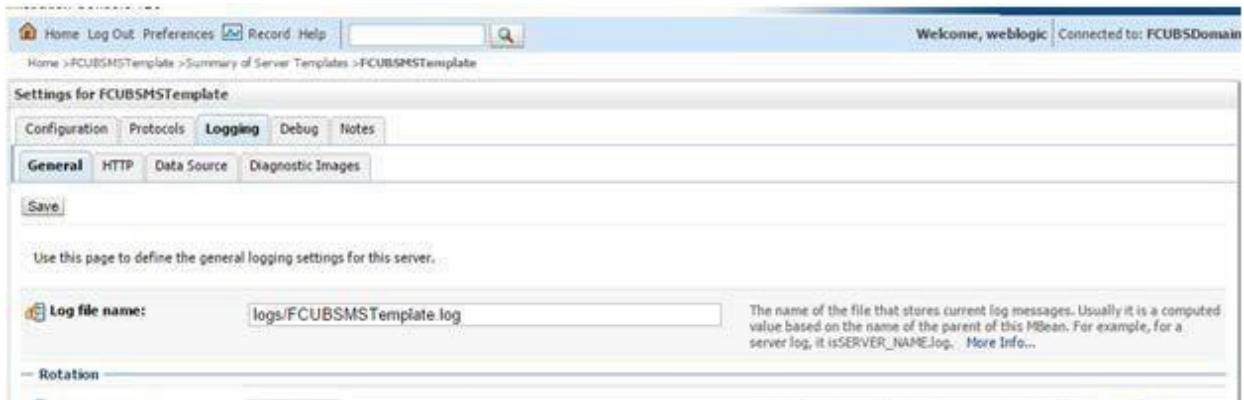

3) Under Advanced Tab, update the below parameters and Click on **Save**.

Advanced		
Date Format Pattern:	MMM d, yyyy h:mm:ss a z	The date format pattern used for rendering dates in the log. The DateFormatPattern string conforms to the specification of the java.text.SimpleDateFormat class. More Info...
Minimum severity to log (.....)	warning	The minimum severity of log messages going to all log destinations. By default all RDS logs are published. More Info...
logger severity properties:		The configuration of the different logger severities keyed by name. The values are one of the predefined Severity strings namely Emergency,Alert, Critical,Error,Warning,Notice,Info,Debug,Trace. More Info...
6		
Log file :		
Severity level:	Warning	The minimum severity of log messages going to the server log file. By default all messages go to the log file. More Info...
Filter:	None	The filter configuration for the server log file. More Info...
Log File Buffer:	8	Gets the underlying log buffer size in bytes. More Info...
Standard out:		
Severity level:	Critical	The minimum severity of log messages going to the standard out. Messages with a lower severity than the specified value will not be published to standard out. More Info...
Filter:	None	The filter configuration for log events being sent to the standard out. More Info...
Domain Log:		
Severity level:	Warning	The minimum severity of log messages going to the domain log from this server's log broadcaster. Messages with a lower severity than the specified value will not be published to the domain log. More Info...
Filter:	None	The filter configuration for log events being sent to the domain log. More Info...
Buffer Size:	10	Broadcasts log messages to the domain log in batch mode. More Info...
Stack Traces to stdout		Specifies whether to dump stack traces to the console when included in logged message. More Info...
stdout Stack Trace Depth:	5	Determines the no of stack trace frames to display on standard out. All frames are displayed in the log file. -1 means all frames are displayed. More Info...
stdout Format:	standard	The output format to use when logging to the console. More Info...

3.3.2 HTTP Logging

- 1) FCUBSDomain → Environment → Clusters → FCUBSTemplate → Logging → HTTP → Uncheck the Access Logs Flag.

The screenshot shows the Oracle WebLogic Administration Console interface. At the top, there is a navigation bar with 'Home', 'Log Out', 'Preferences', 'Record', and 'Help'. The user is logged in as 'weblogic' and is connected to 'FCUBSDoma'. The breadcrumb trail is 'Home > FCUBSMSTemplate > Summary of Server Templates > FCUBSMSTemplate'. The main heading is 'Settings for FCUBSMSTemplate'. Below this, there are tabs for 'Configuration', 'Protocols', 'Logging', 'Debug', and 'Notes'. Under the 'Logging' tab, there are sub-tabs for 'General', 'HTTP', 'Data Source', and 'Diagnostic Images'. A 'Save' button is visible. The main content area contains instructions: 'Use this page to configure HTTP logging for the server. By default, HTTP logging is enabled and the server saves HTTP requests in a separate log file; it does not store HTTP requests in the server log file or the domain log file.' Below this, there is a section for 'HTTP access log file enabled' with an unchecked checkbox, highlighted by a red box. To the right of this checkbox is the text: 'Indicates whether this server logs HTTP requests. (The remaining fields on this page are relevant only if you select this check box.) More Info...'. Below this are three fields: 'Log file name' with the value 'logs/access.log', 'Rotation type' set to 'By Size', and 'Rotation file size' set to '5000'. Each field has a 'More Info...' link.

3.3.3 Stuck Thread Max Time

- 1) FCUBSDomain → Environment → Clusters → FCUBSTemplate → Tuning, update the stuck thread max time to 900 and Click on **Save**.

This screenshot is identical to the one above, showing the 'Settings for FCUBSMSTemplate' page. The 'Save' button is now highlighted with a red box. The 'HTTP access log file enabled' checkbox remains unchecked and is also highlighted with a red box. The rest of the page content, including the instructions and the 'Log file name', 'Rotation type', and 'Rotation file size' fields, is the same as in the previous screenshot.

4. Tuning

4.1 General Parameters

PARAMETER	VALUE	Navigate To
JTA Time out seconds	900	Login to Weblogic Server console. Click on the domain name (ex: FCUBSDomain) which is under 'Domain Structure'. Go to Configuration > JTA, parameter and values is found on the right side panel of console.
Session Timeout	900	Login to Weblogic Server console Click on Deployments which is under 'Domain Structure'. Click on the deployed FCJ application from right side panel. Click on FCJNeoWeb from 'Modules and components'. Go to Configuration General, the parameter values can be found here.

4.2 JVM Tuning

This section of the document provides JVM optimization for Oracle Banking Payments Solution.

It is strictly recommended to use 64 bit JVM for OBPM installation, as 32 bit JVM is obsolete for enterprise application and imposes a restriction on heap size to 4GB.

The minimum and maximum heap size must be set to 8GB and 8GB.

How to find whether the JVM is 32bit or 64bit?

Go to \$JAVA_HOME/bin directory. Check java version using command `./java -d64` – version 64 bit JVM shows the version details where as 32bit throws an error.

How to modify the JVM heap parameters?

To change the JVM heap parameters modify setDomainEnv.sh under domain <domain_name> in both servers. This file is located at

"\$WL_HOME/user_projects/domains/\$WLS_DOMAIN/bin" in both the servers.

Use below USER_MEM_ARGS variable to override the standard memory arguments passed to java for SUN JDK.

32 bit JDK

Strictly it is not recommended to use a 32 bit JDK version because this have a limitation of maximum heap size setting to 4 GB only. This restricts the application scalability.

64 bit JDK

```
USER_MEM_ARGS="-
Dorg.apache.xml.dtm.DTManager=org.apache.xml.dtm.ref.DTManagerDefault
-Dorg.a
pache.xerces.xni.parser.XMLParserConfiguration=org.apache.xerces.parser
s.XML11Configuration -Dweblogic.threadpool.MinPoolSize=100 -
Dweblogic.threadpool.MaxPoolSize=100 -Xms8g -Xmx8g -server -d64 -
XX:+UseParallelOldGC -XX:ParallelGCThreads=4" export

USER_MEM_ARGS
```

Note: Take a backup of the files before modifying the same.

5. Start Managed Servers

Starting using scripts

Managed Servers can be started by executing startManagedWebLogic.sh script present in folder \$DOMAIN_HOME/bin

Usage: ./startManagedWebLogic.sh SERVER_NAME {ADMIN_URL}

Eg: ./startManagedWeblogic.sh FCUBSMS1 https://<hostname1>/console

Starting using console

Alternatively, login to admin console, navigate to FCUBSDomain → Environment → Servers → Control, select the managed servers to be started and click on **Start**.

The screenshot shows the Oracle WebLogic Server Administration Console interface. The main content area is titled 'Summary of Servers' and includes a 'Control' tab. Below the tab, there is a table of servers. The table has columns for 'Server ID', 'Machine', 'State', and 'Status of Last Action'. The 'Server ID' column contains 'AdminServer(admin)', 'FCUBSMS1', 'FCUBSMS2', 'FCUBSMS3', and 'FCUBSMS4'. The 'Machine' column contains 'Machine1' and 'Machine2'. The 'State' column contains 'RUNNING' and 'SHUTDOWN'. The 'Status of Last Action' column contains 'None'. A red box highlights the 'Start' button for the 'FCUBSMS1' server.

Server ID	Machine	State	Status of Last Action
AdminServer(admin)		RUNNING	None
FCUBSMS1	Machine1	SHUTDOWN	None
FCUBSMS2	Machine2	SHUTDOWN	None
FCUBSMS3	Machine1	SHUTDOWN	None
FCUBSMS4	Machine2	SHUTDOWN	None

Upon successful startup, the status of Managed servers is changed to "RUNNING".

ORACLE WebLogic Server Administration Console 12c

Home | Log Out | Preferences | Search | Help | Welcome, weblogic | Connected to: FCUBSDomain

Home > FCUBSDTemplate > Summary of Server Templates > FCUBSDTemplate > Summary of Clusters > Summary of Servers

Summary of Servers

Configuration | Control

A server is an instance of WebLogic Server that runs in its own Java Virtual Machine (JVM) and has its own configuration. This page summarizes each server that has been configured in the current WebLogic Server domain.

Last Refreshed: Jun 11, 2015 2:57:18 PM

Customize this table

Servers (Filtered - More Columns Exist)

Click the **Lock & Edit** button in the Change Center to activate all the buttons on this page.

New | Close | Delete Showing 1 to 5 of 5 Previous | Next

Name vs	Type	Cluster	Machine	State	Health	Listen Port
<input type="checkbox"/> AdminServer(admin)	Configured			RUNNING	OK	7001
<input type="checkbox"/> FCUBSD1	Dynamic	FCUBSCluster	Machine1	RUNNING	OK	7003
<input type="checkbox"/> FCUBSD2	Dynamic	FCUBSCluster	Machine2	RUNNING	OK	7004
<input type="checkbox"/> FCUBSD3	Dynamic	FCUBSCluster	Machine1	RUNNING	OK	7005
<input type="checkbox"/> FCUBSD4	Dynamic	FCUBSCluster	Machine2	RUNNING	OK	7006

New | Close | Delete Showing 1 to 5 of 5 Previous | Next

6. Data Source creation and JDBC Configuration

Following are the JNDI names of those data sources used by Oracle Banking application.

- jdbc/fcjCoreDS - This datasource is used by Oracle Banking Core online screen excluding branch screens.
- jdbc/fcjdevDSBranch - This datasource is used by Branch screens.
- jdbc/fcjSchedulerDS - This datasource is used by Quartz scheduler.
- fcjPayDS_GTXN – Datasource for Oracle Banking Payment OLTP with Global Transaction supported to enable the transaction management by the container and also to .
- fcjPayDS – Datasource used by Payment Batch operations where transaction is handled programmatically.

Note:

- jdbc/fcjdevDS should be **NonXA** and make use of OCI driver.
- jdbc/fcjdevDSBranch and jdbc/fcjSchedulerDS should be **XA**


6.1 Setup Required for OCI Driver

Data sources are created with OCI enabled. For this, Oracle Instant Client is required, below steps need to be followed


- Download Oracle Instant Client corresponding to the used Oracle DB and java (x64):
<http://www.oracle.com/technetwork/database/features/instant-client/index-097480.html>
- Set {ORACLE_HOME} in the environment variable.
- Update the environment variable LD_LIBRARY_PATH as {ORACLE_HOME}/lib. This is to load all the .so files.
- Ensure that the ojdbc*.jar file in {WL_HOME}/server/lib/ojdbc*.jar is the same as the file {ORACLE_HOME}/jdbc/lib/ojdbc*.jar. This is to ensure compatibility.
- Update LD_LIBRARY_PATH in StartWebLogic.sh or in setDomainEnv.sh. This must be the path of directory where Oracle Instant Client is installed.
- If you are still not able to load the .so files, then you need to update the EXTRA_JAVA_PROPERTIES by setting Djava.library.path as {ORACLE_HOME}/lib in StartWebLogic.sh or in setDomainEnv.sh.

6.2 Data source creation: non XA

- 1) Navigate to FCUBSDomain → Services → Data Sources → select New → Generic data source.

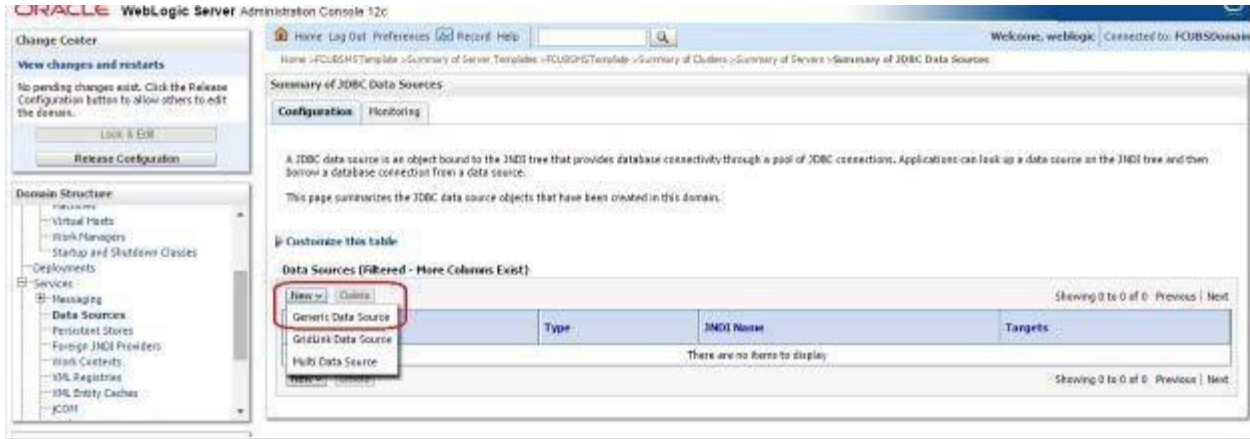


- 2) Enter the Name and JNDI Name and Click on Next.

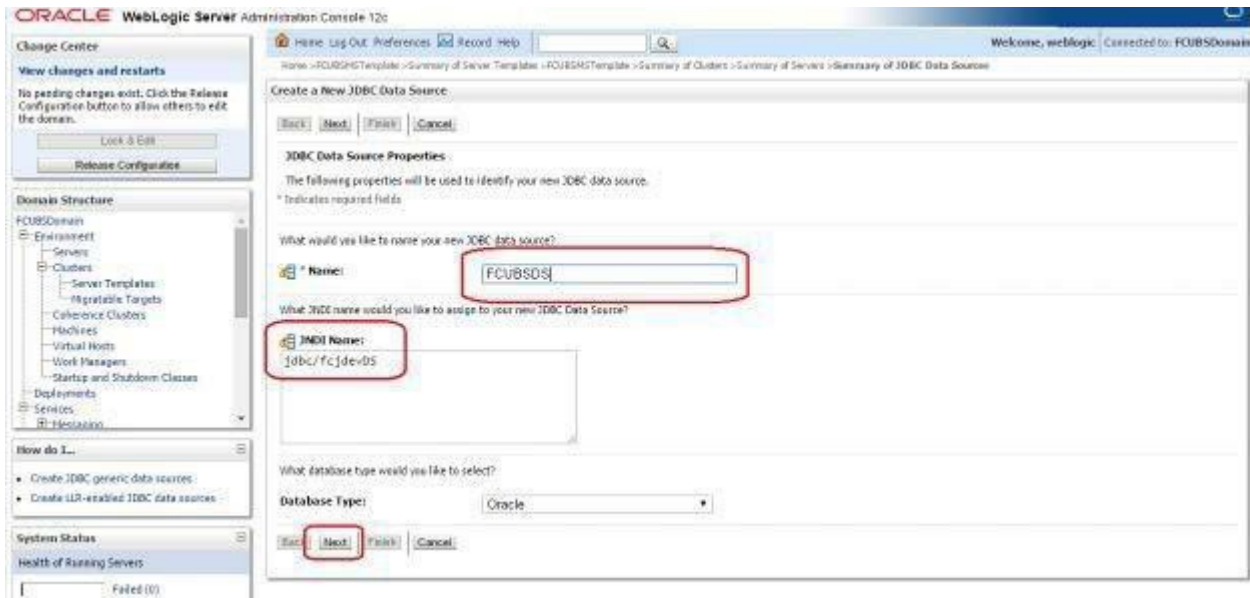


- 3) Select the Driver as “Oracle’s Driver (thin) for Instance connection: Versions: Any” and Click on **Next**.



- 4) Uncheck the “Supports Global Transactions” and click on **Next**.

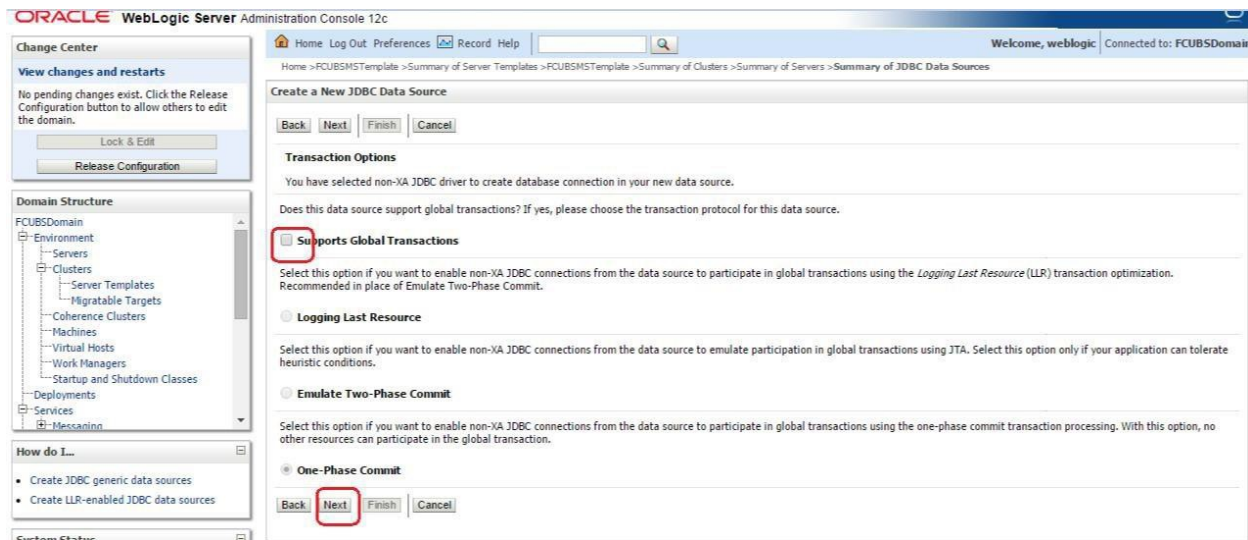

- 5) Enter the Database Name, Host Name, Port, User Name, Password, Confirm Password and Click on **Next**.

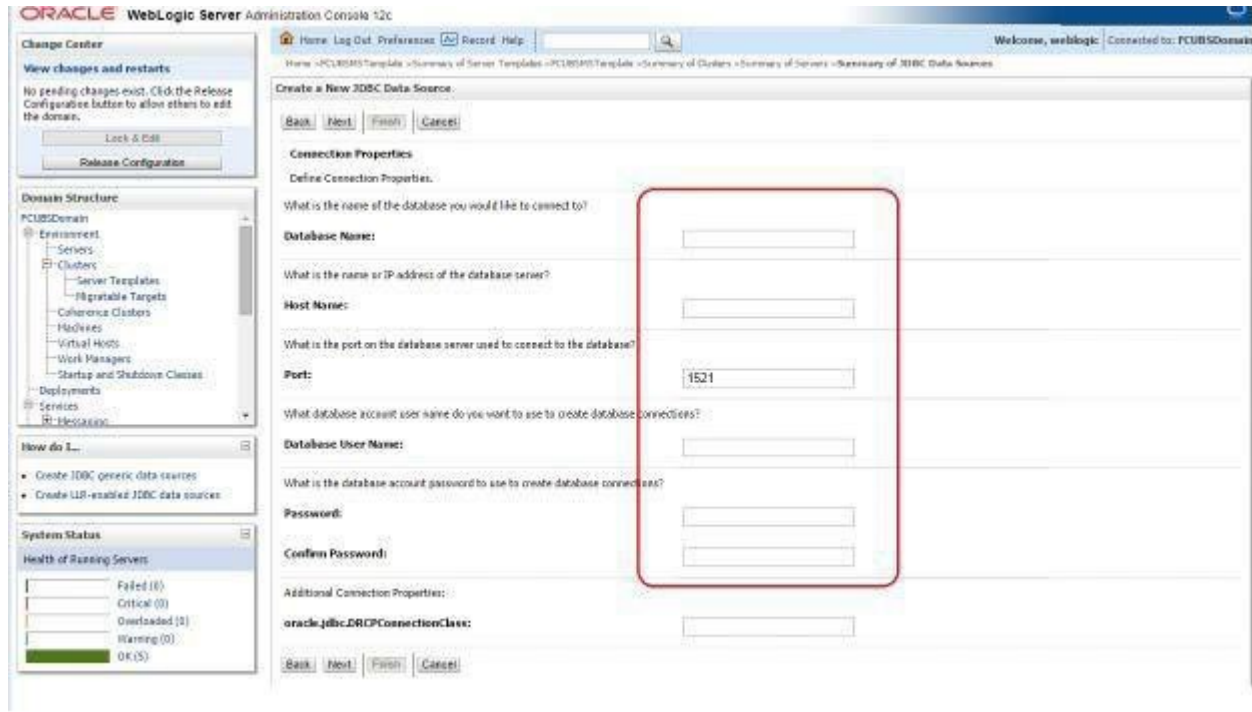

- 6) Replace the JDBC URL in the below format and click on **Next**

Default URL: jdbc:oracle:thin:@<IP_Adress>:<Port>:<INSTANCE_NAME>. Change the default URL to:


```
jdbc:oracle:oci:@(DESCRIPTION=(ADDRESS_LIST=(ADDRESS=(PROTOCOL=TCP)(HOST=xxxxxx.com)(PORT=1521)))(CONNECT_DATA=(SERVICE_NAME=fcubs)))
```

Where,


Scan IP = xxxxxx.com Service Name = fcubs Port = 1521

Make sure that in URL, we make the changes to reflect oci.

Then Click on Test Configuration. The connection test should be successful.

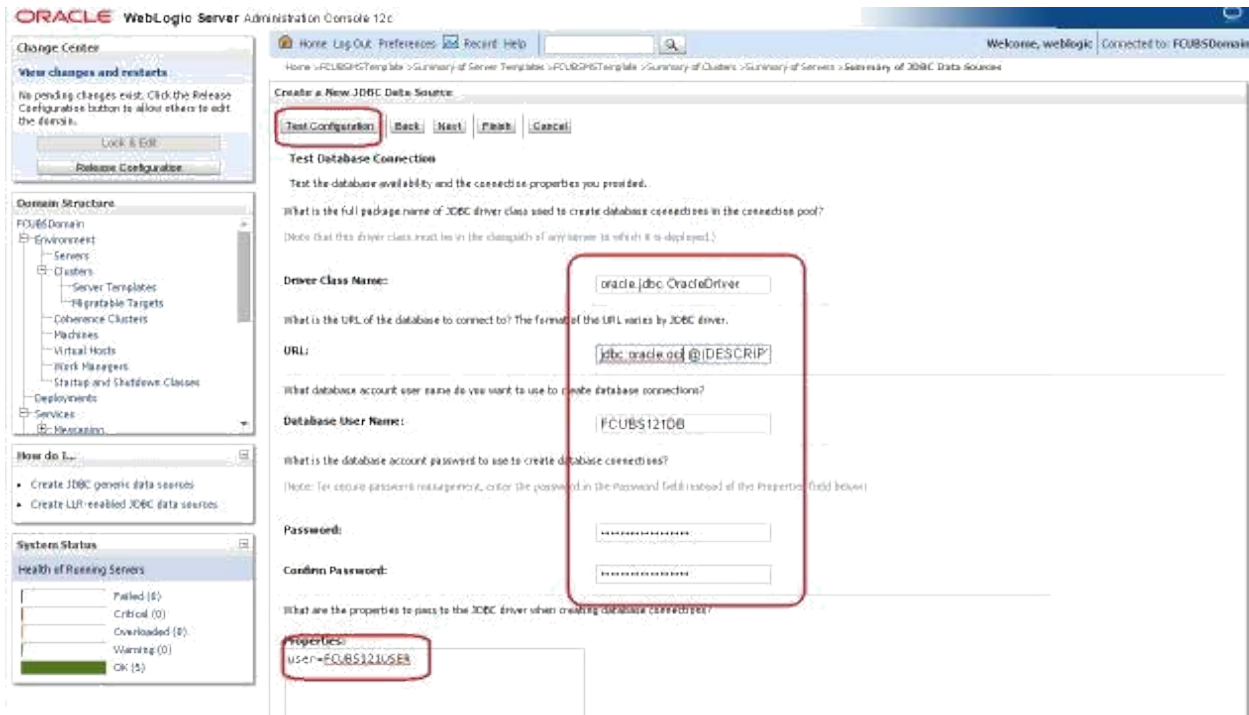


7) Select Target as FCUBSCluster and click on **Finish**.

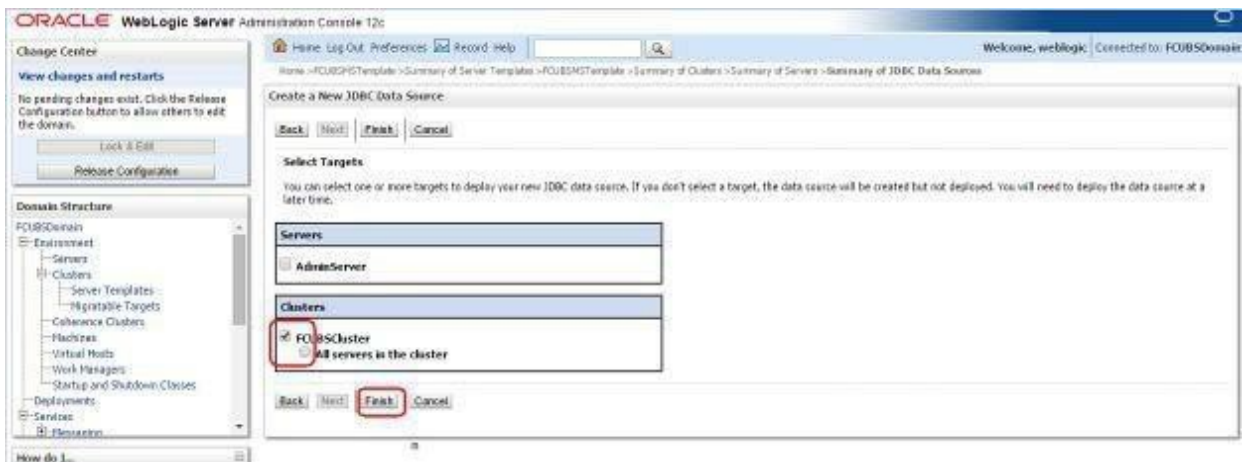


6.3 XA Datasource

- 1) Navigate to FCUBSDomain → Services → Data Sources → select New → Generic data source.

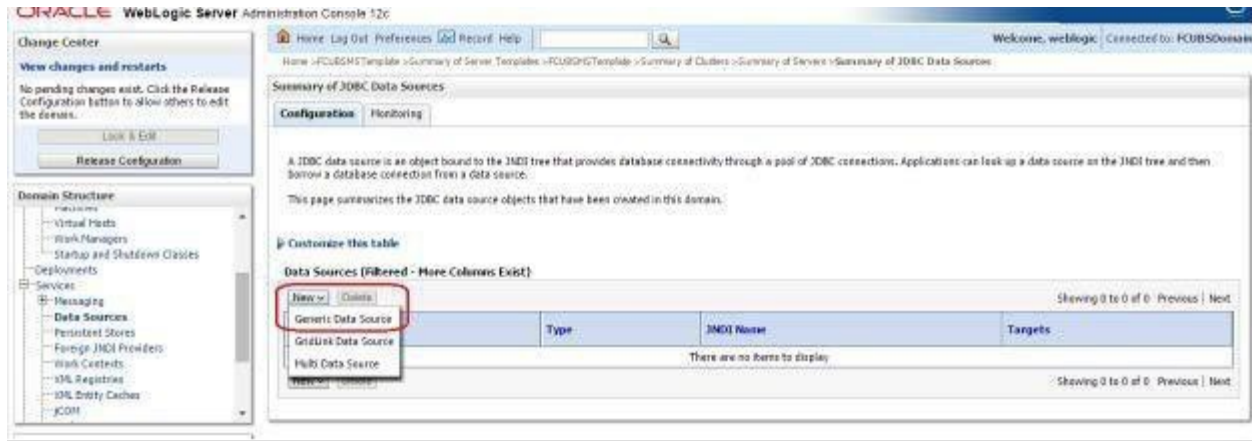


- 2) Enter the Name and JNDI Name and Click on **Next**.

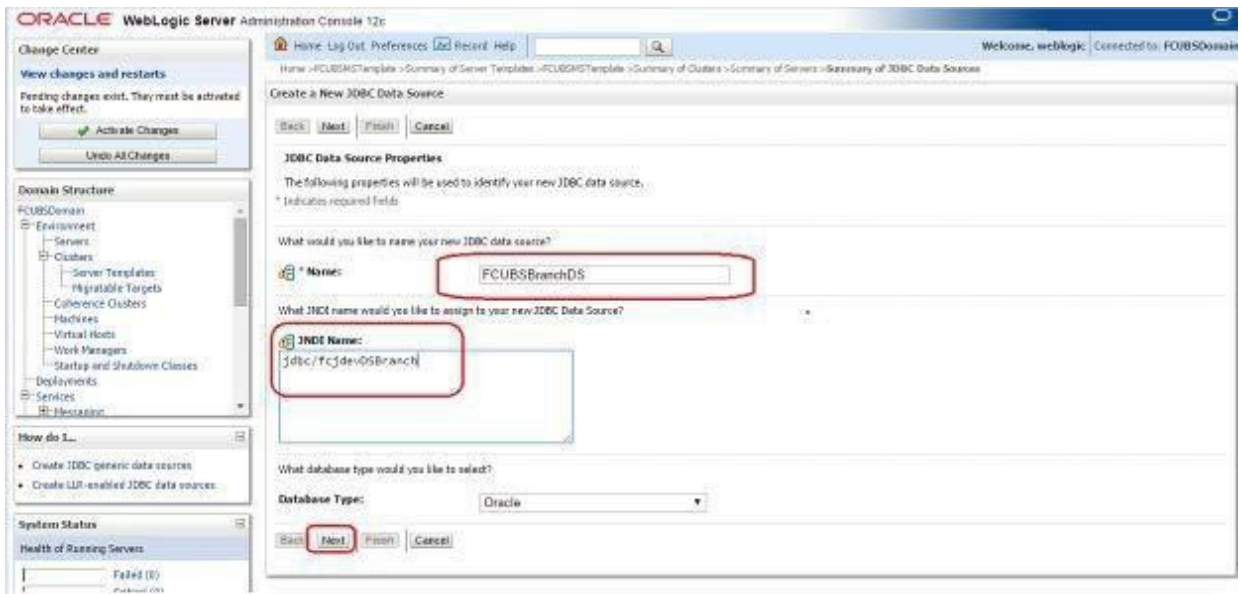



- 3) Select the Driver as “Oracle’s Driver(thin XA) for Instance connection: Versions: Any” and Click on **Next**.




- 4) Click on **Next**.

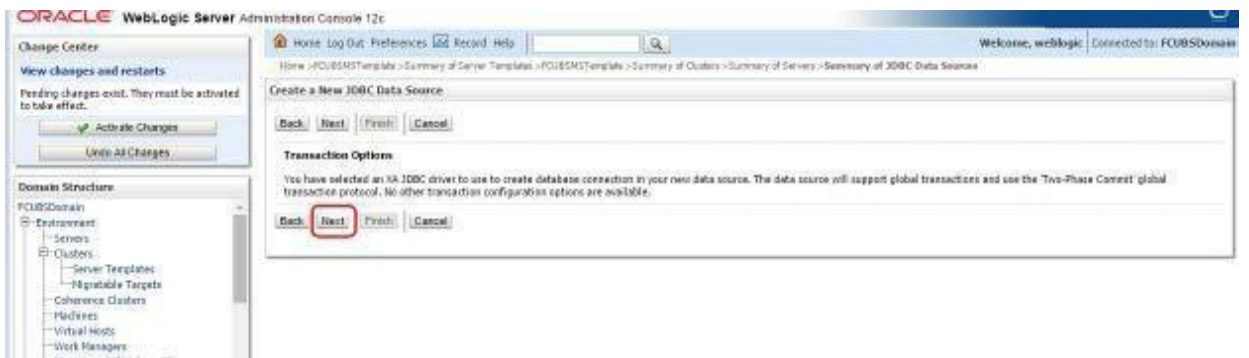


5) From this step to target setting step follow as mentioned in non-xa.

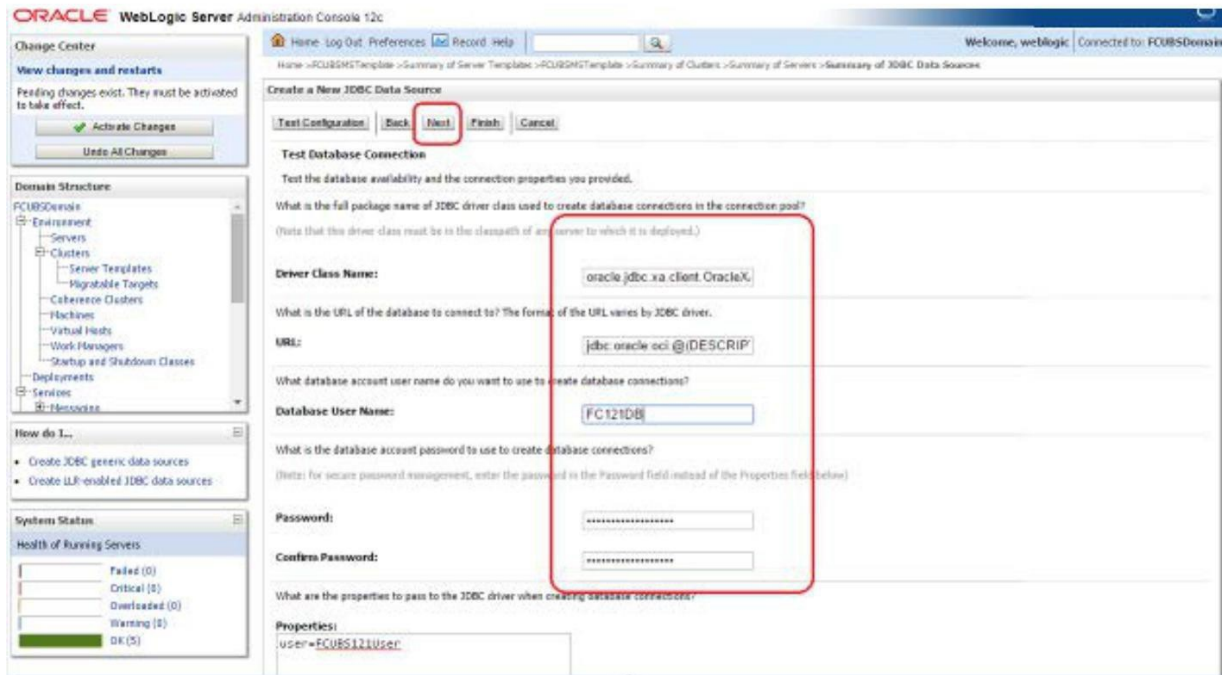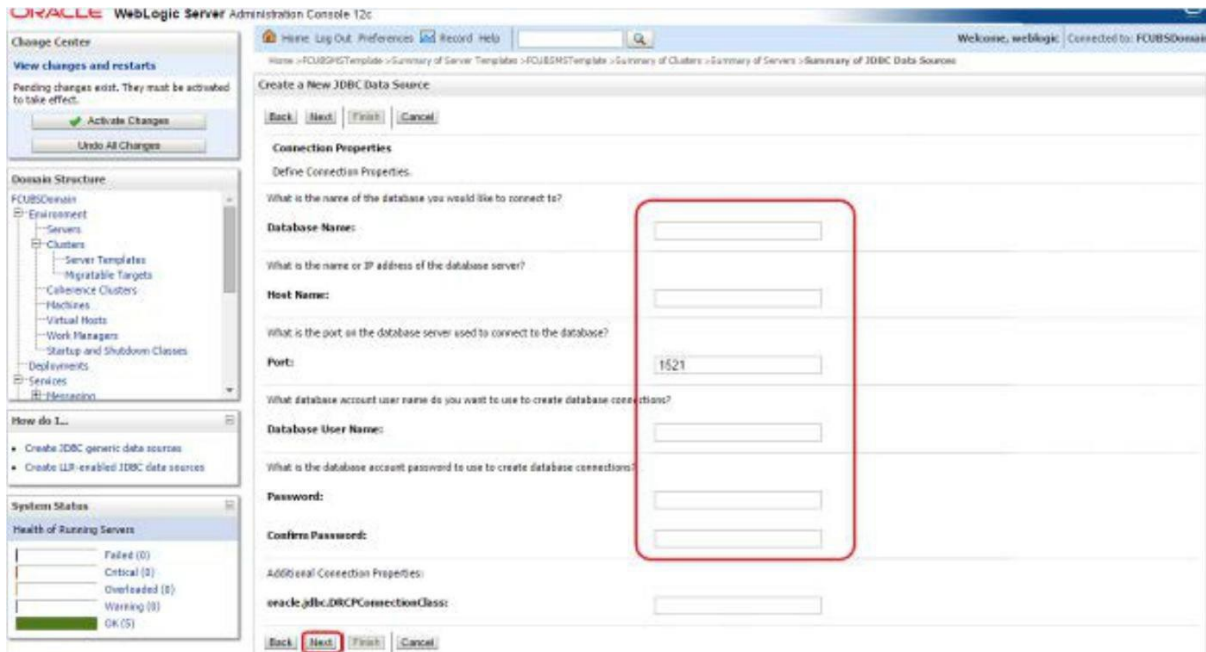


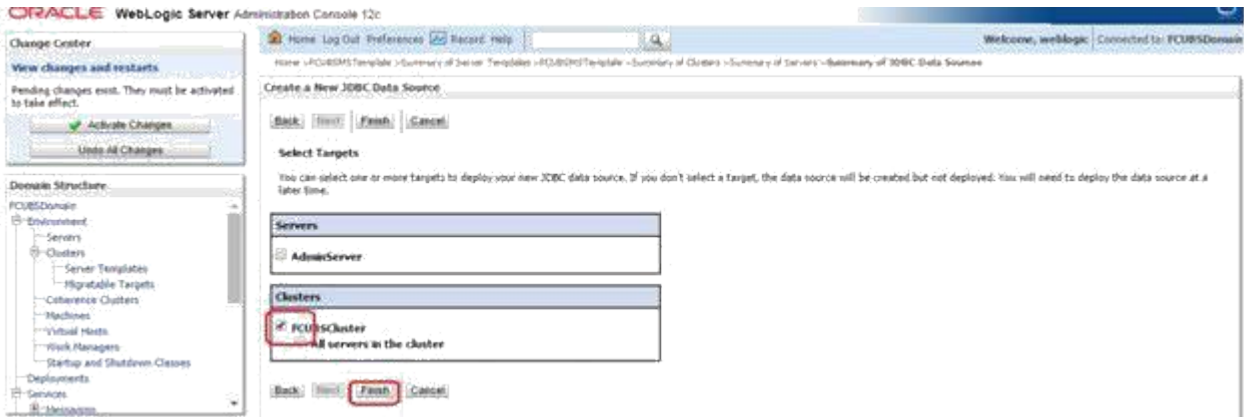

6) Upon Activate Changes would create the XA Datasource.

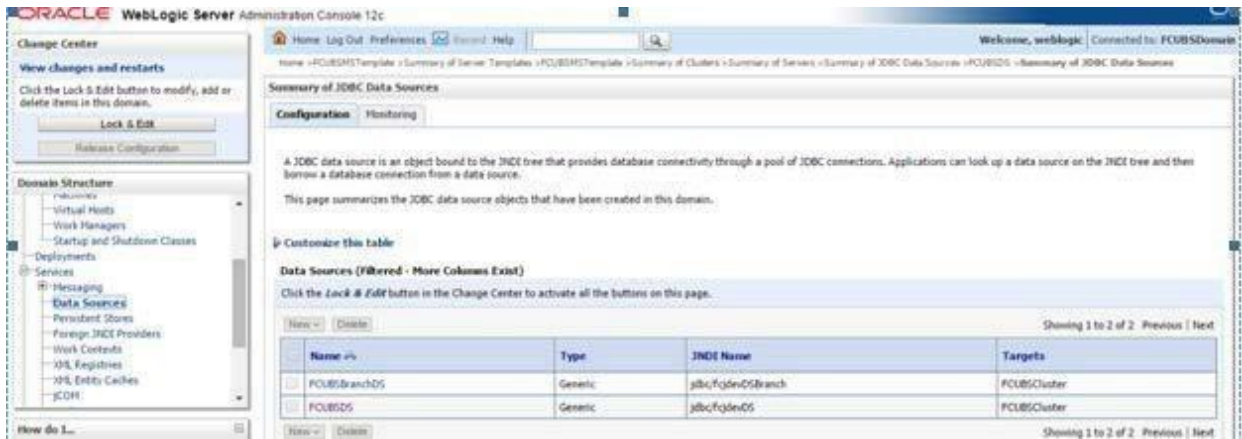

7) Similarly create all the other Datasource required for the FCUBS Application and Gateway Deployments.

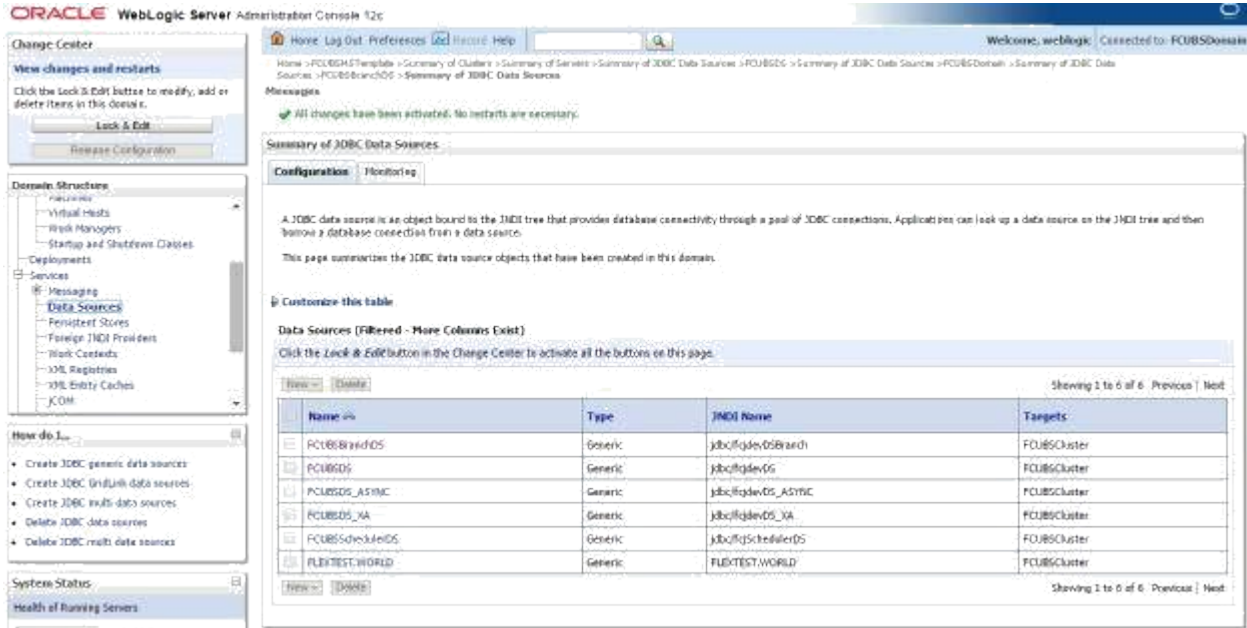

OBPM related datasource parameter recommendation are provided in Annexure A

6.4 JDBC Parameters Tuning

Below JDBC parameters needs to be updated for all the Datasources

PARAMETER	VALUE	Navigate To
Connection Reserve time out	30	Connection Pool->Advance
Test Frequency	60	Connection Pool->Advance
Inactive connection time out	30	Connection Pool->Advance
Initial Capacity	1	Connection Pool
Max capacity	Based on Site Requirement	Connection Pool
Capacity Increment	5	Connection Pool

Shrink Frequency	900	Connection Pool->Advance
Test Connection on Reserve	Checked	Connection Pool->Advance

7. JMS Resource Creation

JMS Resource Creation involves various steps

- Persistence Store Creation
- JMS Server Creation
- JMS Module Creation
- Resource Creation: Connection Factory and Queue's

Refer to the JMS Cluster Configuration document for further details on JMS setup.

8. Oracle WebLogic Load Balancing

There are four major components for load balancing:

1. HTTPS Requests (HTTPS)
2. Web Service Requests (HTTPS)
3. Rest API Requests (HTTPS)
4. JMS Requests (t3)

External Load Balancer:

First three modes can be load balanced by fronting a simple web server to virtualize the IP address/host name to one and route the requests to the managed servers in a round robin or weight based or any other supported algorithm. Oracle HTTP server is an example for such web server.

JMS uses a t3 protocol and it requires load balancer which can intercept the request at level 7 (TCP level) and route the request. Example is Oracle Traffic Director (OTD). Such load balancers can be used for first three type of requests as well.

Internal Load Balancer:

For http/s protocols, there is no production level internal load balancing support from weblogic. This has to be handled using an external load balancer.

Weblogic supports JMS load balancing internally. For this, the client have to know the host name/ip address and port of all the managed servers in a cluster. In all the places where the Initial Context Provider URL is configured in OBPM application, specify the URL as:

```
t3://[HOST NAME 1]:[PORT 1],[HOST NAME 2]:[PORT 2]
```

HOST NAME - This is a DNS name of individual manager servers

PORT - Port number of individual managed servers.

9. Frequently Asked Questions

9.1 Machine status is Unreachable.

If the machine status is unreachable, means that machine is not reachable and from console you cannot start/stop the managed servers.

In the console, navigate through Domain structure → Machines → machine1 → Monitoring → Node Manager Status will be Unreachable

To change the status, you need to start the nodemanager on that server. Refer to start nodemanager section on steps to start the nodemanager.


9.2 How to restart node manager?

- 1) Locate node manager pid using `ps -ef|grep weblogic.nodemanager.javaHome`
- 2) Change directory to `$DOMAIN_HOME/bin`
- 3) Kill the unix process using `kill -9 <pid>`
- 4) Verify that the node manager is killed by `tail -f nohup.out`
- 5) Start node manager using `nohup ./startNodeManager.sh &` 6) Verify nodemanager is started using `tail -f nohup.out`


9.3 Scaling Up Dynamic Cluster

When the capacity is insufficient and you need to scale-up, you can add dynamic servers on demand. It requires only a few clicks.


1) Navigate to FCUBSDomain → Environment → Clusters.

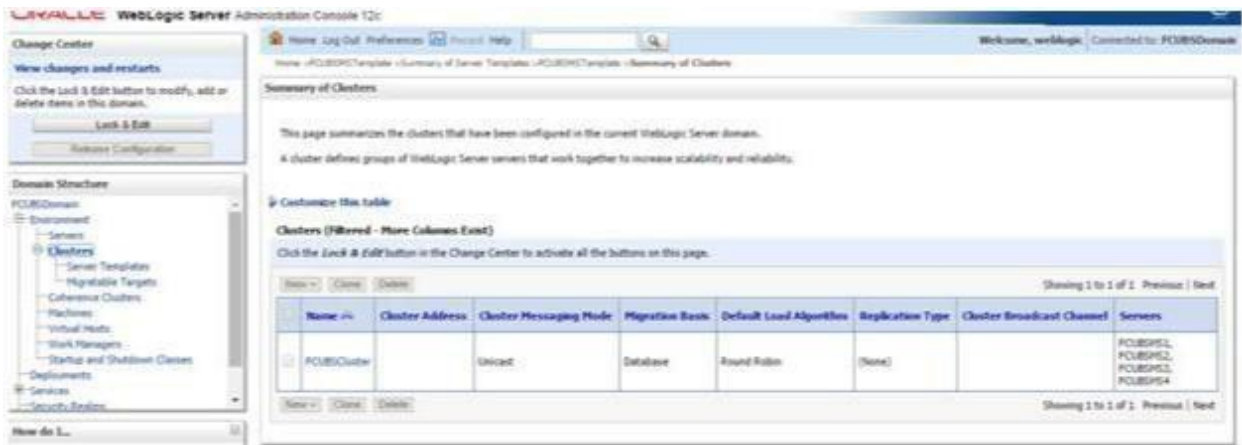

2) Click FCUBSCluster → Configuration → Servers tab.

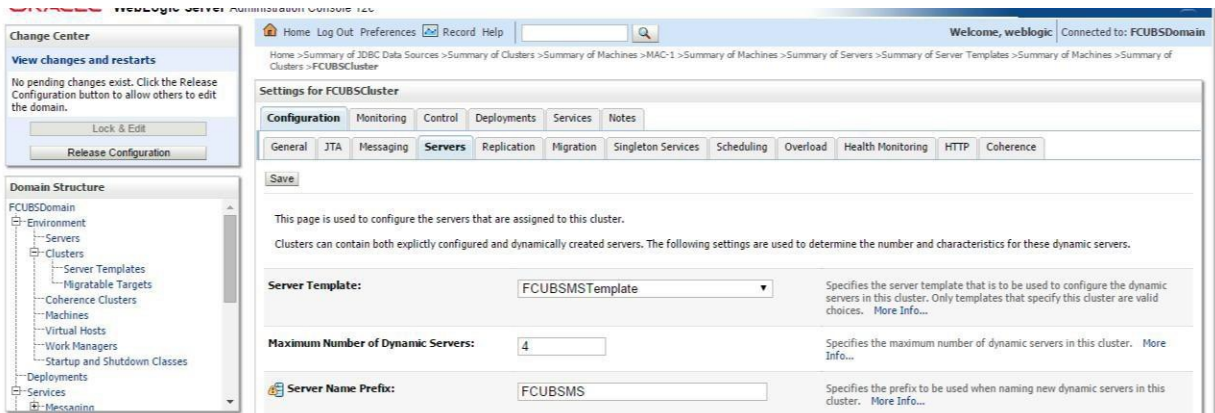

3) Change the Maximum Number of Dynamic Servers to: 8 and Click **Save**.

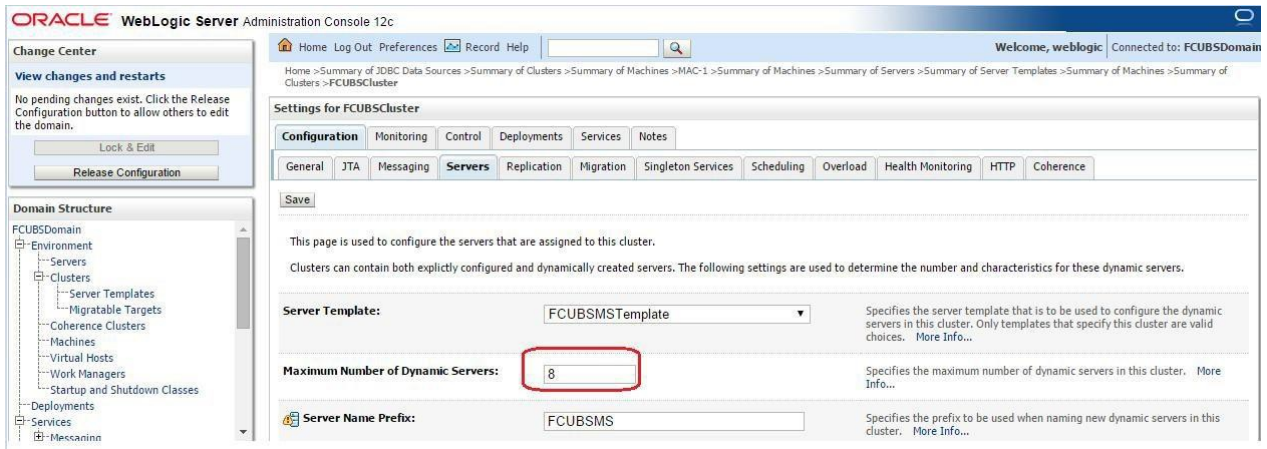

4) Activate changes in the Change Center of the Weblogic Console. After activation 4 new Dynamic Servers are added to the Dynamic Cluster.

<input type="checkbox"/>	Name ^	Type	Machine	Listen Port
<input type="checkbox"/>	FCUBSMS1	Dynamic	MAC-1	7101
<input type="checkbox"/>	FCUBSMS2	Dynamic	MAC-2	7102
<input type="checkbox"/>	FCUBSMS3	Dynamic	MAC-1	7103
<input type="checkbox"/>	FCUBSMS4	Dynamic	MAC-2	7104
<input type="checkbox"/>	FCUBSMS5	Dynamic	MAC-1	7105
<input type="checkbox"/>	FCUBSMS6	Dynamic	MAC-2	7106
<input type="checkbox"/>	FCUBSMS7	Dynamic	MAC-1	7107
<input type="checkbox"/>	FCUBSMS8	Dynamic	MAC-2	7108

5) Start the 4 new Dynamic Servers and you have doubled your capacity.

9.4 Session Timeout

Session timeouts occur intermittently during load condition. Verify the following:

1. Clock Synchronization: Time across the nodes/machines is same.
2. Session Stickiness in load balancer: Persistence Type in load balancer should be set to SOURCE IP and should not be cookie.

Annexure A – Datasource Parameter Recommendations

For the recommended parameter values for data sources, please refer Payments *Weblogic Recommendations* document.



Weblogic 12c Middleware Practices
November 2021
Version 14.5.0.0.0

Oracle Financial Services Software Limited
Oracle Park
Off Western Express Highway Goregaon
(East)
Mumbai, Maharashtra 400 063 India

Worldwide Inquiries:
Phone: +91 22 6718 3000 Fax:+91
22 6718 3001
www.oracle.com/financialservices/

-

Copyright © 2018, 2021, Oracle and/or its affiliates. All rights reserved.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.