

# Oracle Banking Trade Finance

## Configuring Weblogic Server 12c



Release 14.7.4.0.0

F99215-01

June 2024

The Oracle logo, consisting of a solid red square with the word "ORACLE" in white, uppercase, sans-serif font centered within it.

ORACLE®

Oracle Banking Trade Finance Configuring Weblogic Server 12c, Release 14.7.4.0.0

F99215-01

Copyright © 2007, 2024, Oracle and/or its affiliates.

Primary Authors: (primary author), (primary author)

Contributing Authors: (contributing author), (contributing author)

Contributors: (contributor), (contributor)

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

# Contents

<b>1</b>	<b>Introduction</b>	
1.1	Purpose of this Document	1-1
1.2	WebLogic Server Overview	1-1
1.3	Pre-requisites	1-4
<b>2</b>	<b>Domain Configuration</b>	
2.1	Domain Creation	2-1
2.2	Pack and Unpack Domain	2-7
2.3	Start Admin server	2-8
2.4	Start Node Manager	2-8
<b>3</b>	<b>Cluster Configuration</b>	
3.1	Machines Configuration	3-1
3.2	Dynamic Cluster Creation	3-3
3.3	Managed Server Template configuration	3-6
3.3.1	Logging	3-6
3.3.2	HTTP Logging	3-8
3.3.3	Stuck Tread Max Time	3-8
<b>4</b>	<b>Tuning</b>	
4.1	General Parameters	4-1
4.2	JVM Tuning	4-1
<b>5</b>	<b>Start Managed Servers</b>	
<b>6</b>	<b>Data Source creation and JDBC Configuration</b>	
6.1	Data source creation: non XA	6-1
6.2	XA Datasource	6-4

## 7 JMS Resource Creation

---

## 8 Oracle WebLogic Load Balancing

---

## 9 Frequently Asked Questions

---

9.1	Machine status is Unreachable	9-1
9.2	How to restart node manager?	9-1
9.3	Scaling Up Dynamic Cluster	9-1
9.4	Session Timeout	9-2

# 1

## Introduction

### 1.1 Purpose of this Document

The purpose of this document is to explain the steps required for Configuration and applying best practices in cluster mode for

- FCUBS 14.4
- Weblogic Version 12.2.1.4.0
- JDK 1.8.0\_241

### 1.2 WebLogic Server Overview


This section of the document provides brief explanation on the main components involved in WebLogic server.

#### Domain


A domain is the basic administration unit for WebLogic Server instances. A domain consists of one or more WebLogic Server instances (and their associated resources) that is managed with a single Administration Server. Multiple domains can be defined based on different system administrators' responsibilities, application boundaries, or geographical locations of servers. Conversely, a single domain can be used to centralize all WebLogic Server administration activities.

Each WebLogic Server domain must have one server instance that acts as the Administration Server. Administration Server can be used via the Administration Console or using the command line for configuring all other server instances and resources in the domain.

#### WebLogic Domain Structure

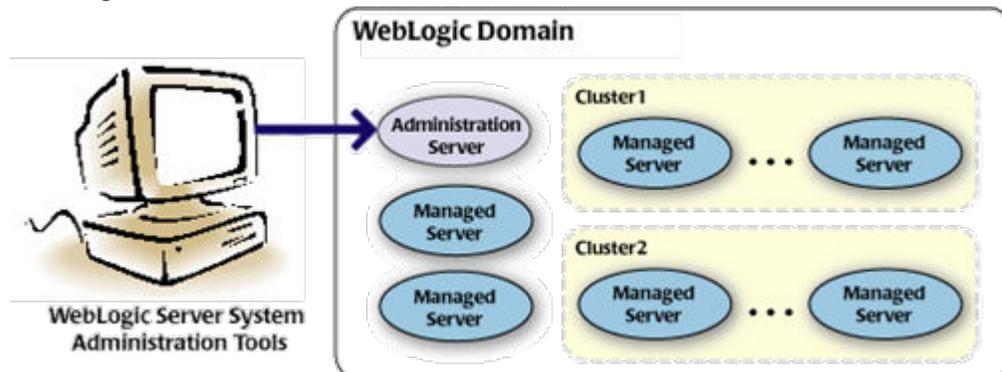

## Weblogic 12c Domain Overview

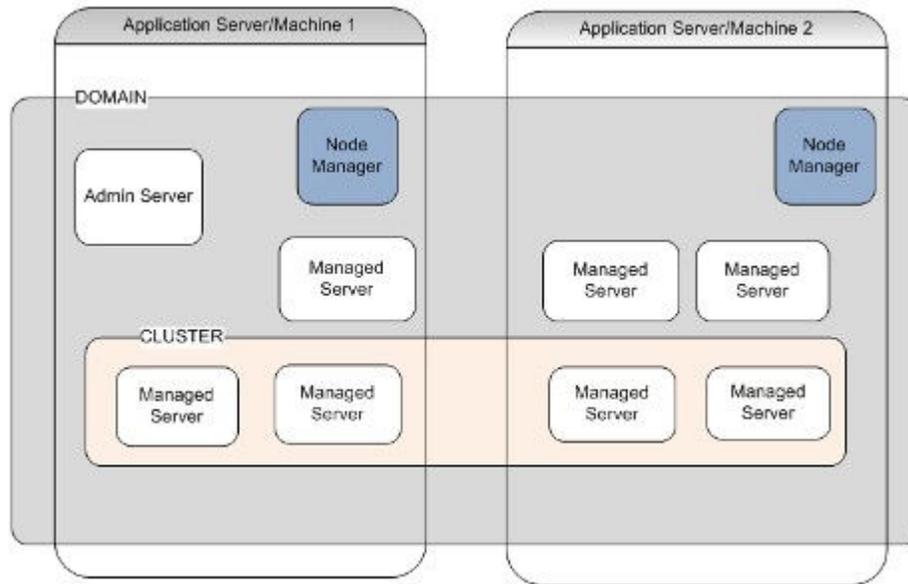

### Administration Server

A domain includes one WebLogic Server instance that is configured as an Administration Server. All changes to configuration and deployment of applications are done through the Administration Server. The Administration Server provides a central point for managing the domain and providing access to the WebLogic Server administration tools.

These tools include the following:

- WebLogic Server Administration Console: Graphical user interface to the Administration Server.
- WebLogic Server Node Manager: A Java program that lets you start and stop server instances - both Administration Servers and Managed Servers - remotely, and to monitor and automatically restart them after an unexpected failure.

Admin server start mode needs to be configured as Production Mode.

### Managed Server

In a domain, server instances other than the Administration Server are referred to as Managed Servers. Managed servers host the components and associated resources that constitute your applications—for example, JSPs and EJBs.

When a Managed Server starts up, it connects to the domain's Administration Server to obtain configuration and deployment settings. In a domain with only a single WebLogic Server instance, that single server works as both the administration server and managed server.

### Node Manager

The Managed Servers in a production WebLogic Server environment are often distributed across multiple machines and geographic locations.

Node Manager is a Java utility that runs as separate process from WebLogic Server and allows you to perform common operations tasks for a Managed Server, regardless of its location with respect to its Administration Server. While use of Node Manager is optional, it provides valuable benefits if your WebLogic Server environment hosts applications with high availability requirements.

If you run Node Manager on a machine that hosts Managed Servers, you can start and stop the Managed Servers remotely using the Administration Console or from the command line. Node Manager can also automatically restart a Managed Server after an unexpected failure.

### **Machine**

A machine in the Weblogic Serve context is the logical representation of the computer that hosts one or more Weblogic Server instances(servers). The Admin Server uses the machine definitions to start remote servers through the Node Managers that run on those servers. A machine could be a physical or virtual server that hosts an Admin or Managed Server that belongs to a domain.

### **Managed Server Cluster**

Two or more Managed Servers can be configured as a WebLogic Server cluster to increase application scalability and availability. In a WebLogic Server cluster, most resources and services are deployed to each Managed Server (as opposed to a single Managed Server,) enabling failover and load balancing.

The servers within a cluster can either run on the same machine or reside in different machines. To the client, a cluster appears as a single WebLogic Server instance.

### **Dynamic Cluster**

A dynamic cluster is any cluster that contains one or more dynamic servers. Each server in the cluster will be based upon a single shared server template. The server template allows you to configure each server the same and ensures that servers do not need to be manually configured before being added to the cluster. This allows you to easily scale up or down the number of servers in your cluster without the need for setting up each server manually. Changes made to the server template are rolled out to all servers that use that template.

You cannot configure dynamic servers individually; there are no server instance definitions in the config.xml file when using a dynamic cluster. Therefore, you cannot override the server template with server-specific attributes or target applications to an individual dynamic server instance.

When configuring your cluster you specify the maximum number of servers you expect to need at peak times. The specified number of server instances is then created, each based upon your server template. You can then start up however many you need and scale up or down over time according to your needs. If you need additional server instances on top of the number you originally specified, you can increase the maximum number of servers instances (dynamic) in the dynamic cluster configuration.

### **Server Templates**


A single server template provides the basis for the creation of the dynamic servers. Using this single template provides the possibility of every member being created with exactly the same attributes. Where some of the server-specific attributes like Servername, listen-ports, machines, etc. can be calculated based upon tokens.

You can pre-create server templates and let Weblogic clone one when a Dynamic Cluster is created.

When none is available a server template is created with the Dynamic Cluster. The name and the listen ports are the only server template attributes that you provide during Dynamic Cluster

creation.

### Simplified Configuration with Scalability and Elasticity

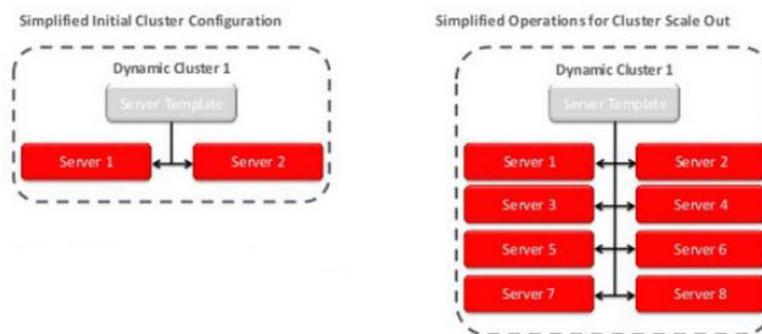

## 1.3 Pre-requisites

In this document, we are going to create a domain with two managed servers. The managed servers are going to be created on two different physical servers (nodes). Note that, this document has been prepared based on a test conducted in Linux servers.

This requires Weblogic Server of same version to be installed on both the machines and services.

### Environment

2 servers where linux is installed, 1 will be primary where admin console will be running along with managed servers and the other where only managed servers will be.

### Softwares

1. Oracle Weblogic Server 12.2.1.4 installed on both the machines under same folder structure.
2. JDK 1.8 Latest available version installed on both the machines. In this document JDK1.8.0\_241 version is used.

### Clock Synchronization

The clocks of both the servers participating in the cluster must be synchronized to within one second difference to enable proper functioning of jobs otherwise it will lead to session timeouts.

### Enable Graphical User Interface (GUI)

Establish a telnet or SSH connection to primary server. Start X-manager (or any similar tool) in windows desktop. Export DISPLAY environment variable to the machine IP where x-manager is running.

Syntax: `export DISPLAY=<ip-address>:<port>`

Test using `xclock`

# 2

## Domain Configuration

### 2.1 Domain Creation


Weblogic domain creation and configuration will be done from primary server.

From primary server, launch the fusion Middleware configuration wizard using the command `config.sh` available under `$WLS_HOME/common/bin` directory.

1. In the Welcome screen, select **Create a new domain** option. Enter the domain name and click on **Next**.



2. Select the required templates from **Available Templates** and click **Next**.

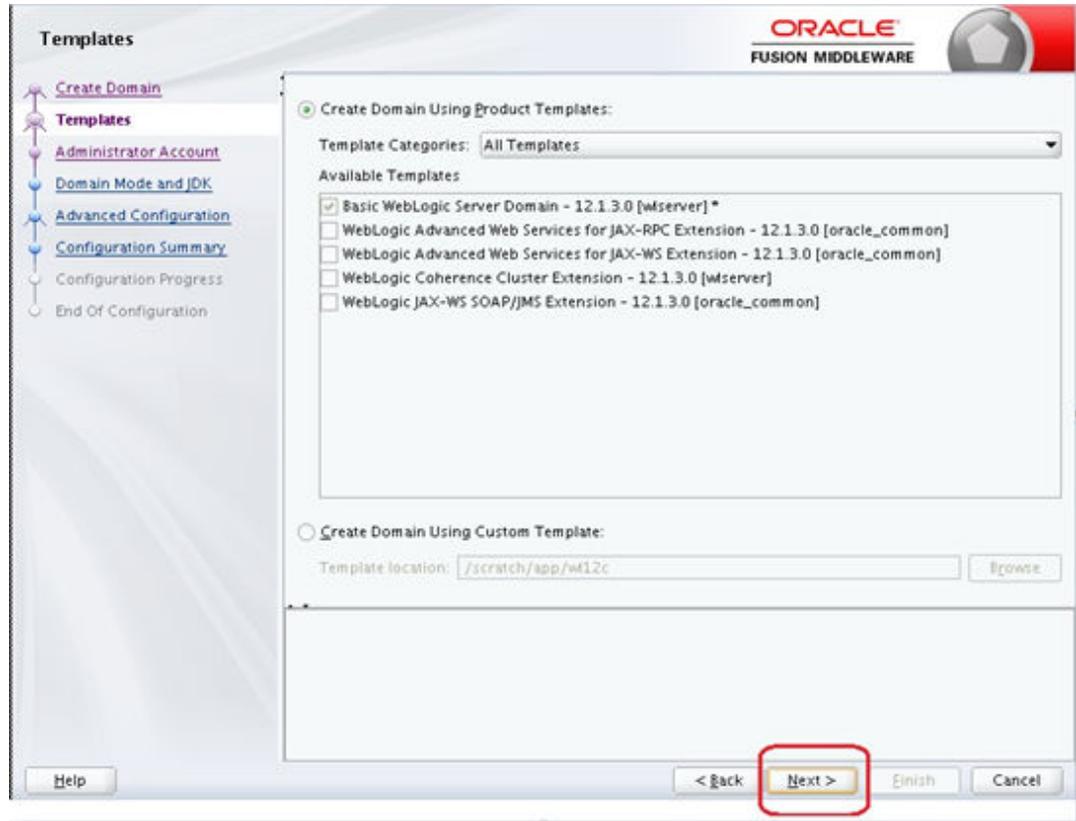

3. Specify Administrator **User Name** and **Password**.
  - The specified credentials are used to access Administration console.
  - You can use this screen to define the default WebLogic Administrator account for the domain. This account is used to boot and connect to the domain's Administration

Server. Click **Next**.

**Administrator Account**

ORACLE  
FUSION MIDDLEWARE

Create Domain  
Templates  
**Administrator Account**  
Domain Mode and JDK  
Advanced Configuration  
Configuration Summary  
Configuration Progress  
End Of Configuration

Name: weblogic  
Password: .....  
Confirm Password: .....

Must be the same as the password. Password must contain at least 8 alphanumeric characters with at least one number or special character.

Help < Back **Next >** Finish Cancel

4. Select Server Startup as **Production Mode** and the available **JDKs**. Click **Next**.

**Domain Mode and JDK**

ORACLE  
FUSION MIDDLEWARE

Create Domain  
Templates  
Administrator Account  
**Domain Mode and JDK**  
Advanced Configuration  
Administration Server  
Node Manager  
Configuration Summary  
Configuration Progress  
End Of Configuration

**Domain Mode**

Development  
Utilize boot.properties for username and password, and poll for applications to deploy.

**Production**  
Require the entry of a username and password, and do not poll for applications to deploy.

**JDK**

Oracle HotSpot 1.7.0\_75 /usr/java/jdk1.7.0\_75  
 Other JDK Location:  Browse

Help < Back **Next >** Finish Cancel

5. Select the check box adjacent to **Administration Server** and **Node Manager**. Click **Next**.



6. Specify the **Administration Server Listen address** and **Listen port**.



 **Note:**

The default Listen port is 7001 and SSL port is 7101. This could be changed to any other available port. Ensure to make a note, of this port since the same is required for launching the Admin console, post domain creation.


 **Note:**

Check for the port availability using the command - `netstat -anp |grep <Port no>`

The next screen displays **Node Manager Configuration**.

7. Configure **Node Manager**.

Select **Per Domain Default Location** option from **Node Manager Type**. And in the **Node Manager Credentials**, provide the username and password of the node manager. Click **Next**.

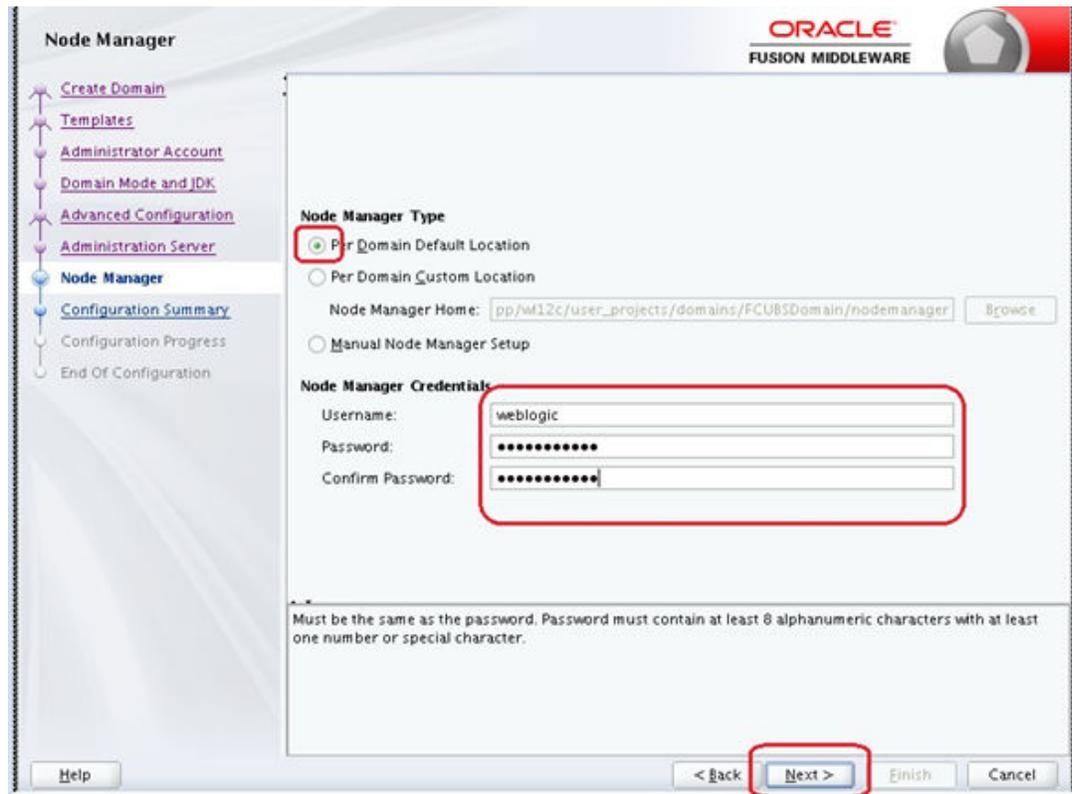

**Node Manager**

ORACLE  
FUSION MIDDLEWARE

Create Domain  
Templates  
Administrator Account  
Domain Mode and JDK  
Advanced Configuration  
Administration Server  
**Node Manager**  
Configuration Summary  
Configuration Progress  
End Of Configuration

**Node Manager Type**

Per Domain Default Location  
 Per Domain Custom Location  
Node Manager Home:    
 Manual Node Manager Setup


**Node Manager Credentials**

Username:   
Password:   
Confirm Password:

Must be the same as the password. Password must contain at least 8 alphanumeric characters with at least one number or special character.

Help < Back **Next >** Finish Cancel

- Verify the details and click **Create**. The domain creation process is initiated and the progress of completion is indicated.

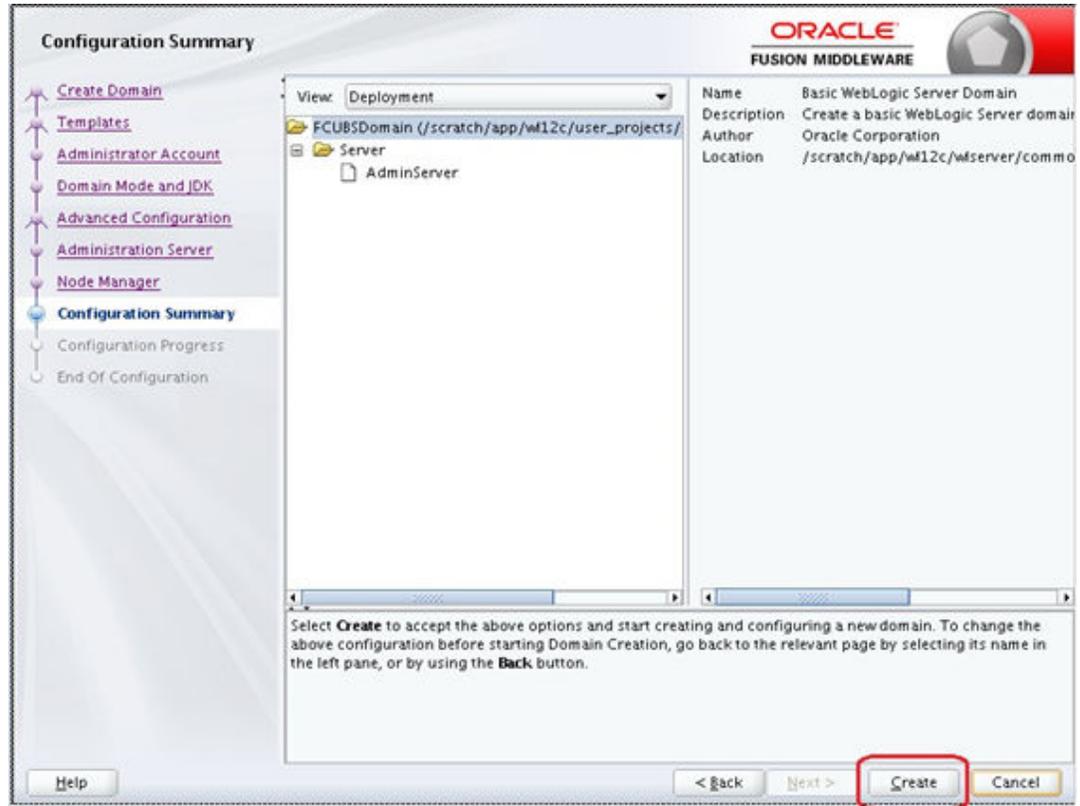

- Click **Next**.



10. The **Configuration Success** message will be displayed as follows:



The Admin Server console URL is as indicated below:

**http://<IP address>:<admin console port>/console**

- a. <IP address >: Host on which domain was created.
- b. <admin console port> : Port specified in Administration Server configuration page.

In this case the Admin Console URL is: https://<server1hostname>:7101/console

## 2.2 Pack and Unpack Domain

The domain structure is expected to be copied to the second server during domain creation. To copy the same, you can use pack and unpack utility provided under \$WLSHOME/common/bin.

### Pack

Pack domain in primary server:

```
./pack.sh -managed=true -domain=/scratch/app/wl12c/user_projects/domains/FCUBSDomain -  
template=/tmp/FCUBSDomain.jar -template_name="FCUBSDomain"
```

### Unpack

Unpack FTP FCBUSDomain.jar in binary mode to secondary server under /tmp area and unpack the domain using unpack utility provided under \$WLSHOME/common/bin

```
./unpack.sh -domain=/scratch/app/wl12c/user_projects/domains/FCUBSDomain -  
template=/tmp/FCUBSDomain.jar
```

## 2.3 Start Admin server

Admin server is started on the primary server. Login to primary server and navigate to folder \$DOMAIN\_HOME/bin and execute **startWeblogic.sh**.

## 2.4 Start Node Manager

Node Manager needs to be started on both the servers. Before starting the node manager update ListenAddress to the Hostname/IP Address of the machine in nodemanager.properties located in folder \$DOMAIN\_HOME/nodemanager

To start the node manager login to the servers and navigate to folder \$DOMAIN\_HOME/bin and execute **NodeManager.sh**

# 3

## Cluster Configuration

Dynamic Cluster configuration involves below steps

1. Machine Configuration
2. Dynamic Cluster Creation: In a normal WebLogic Cluster you define Managed Server and add them to Cluster. In Dynamic Cluster, you select number of Servers you want in Cluster and Server Template you wish to assign to Servers in this WebLogic Dynamic Cluster.
3. Server template modification: Servers (or Managed Server) that are part of WebLogic Dynamic Cluster will have properties taken from Server Template. Modify server template for best practices parameters for Dynamic Servers (part of Dynamic Cluster), you modify Server Template that is applicable to Dynamic Cluster. These settings are applicable to all the managed servers.
4. Activate Changes which would automatically create the managed servers (as mentioned in the number of servers required parameter).


### Calculate Number of Servers Required:

For every 50 logged in Oracle Banking Trade Finance users require one managed server of size 8GB. i.e. for 300 logged in Oracle Banking Trade Finance users, it is recommended to have 6 managed servers. Based on the logged in users that needs to be supported decide on the number of the managed servers required. This parameter is required later in the dynamic cluster creation.


- [Machines Configuration](#)
- [Dynamic Cluster Creation](#)
- [Managed Server Template configuration](#)

## 3.1 Machines Configuration


1. Login into Admin Console and navigate to **FCUBSDomain** > **Environment** > **Machine** and click **New**.

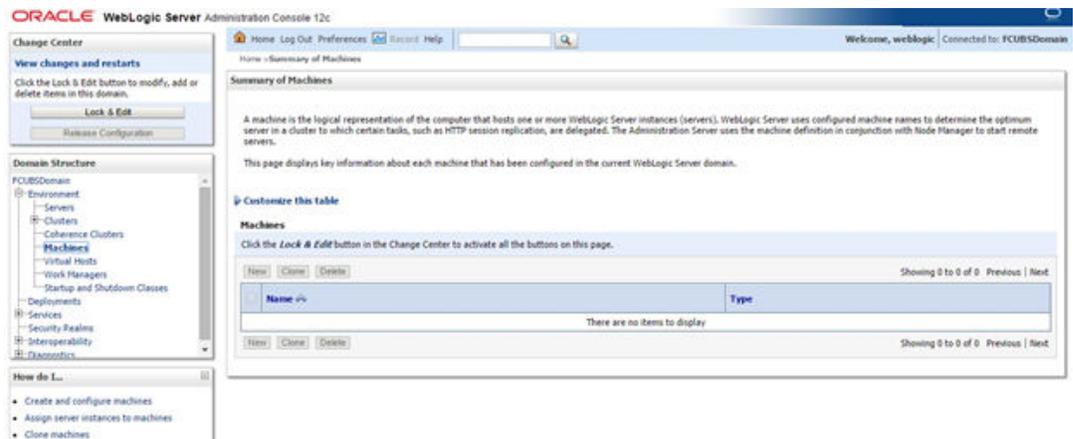

2. Enter the **Machine Name** and click **Next**.

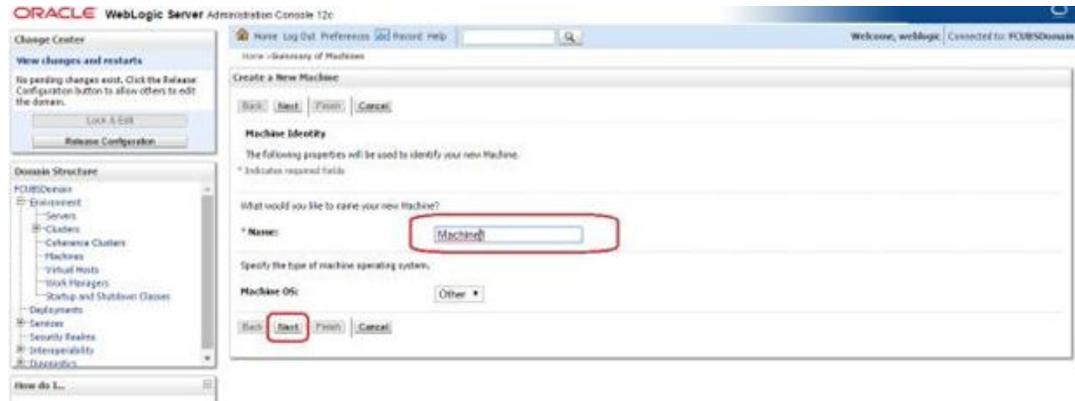


3. Enter the **Listen Address** and **Listen Port** (this is the port mentioned in nodemanager.properties file) and click **Finish**.

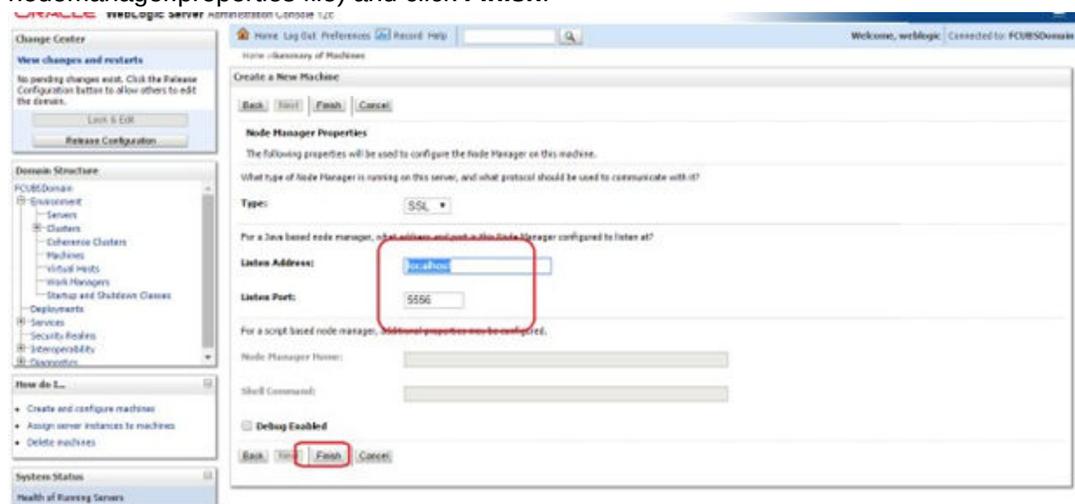

4. Machine is created.




- Similarly create a new machine entry for the other server.

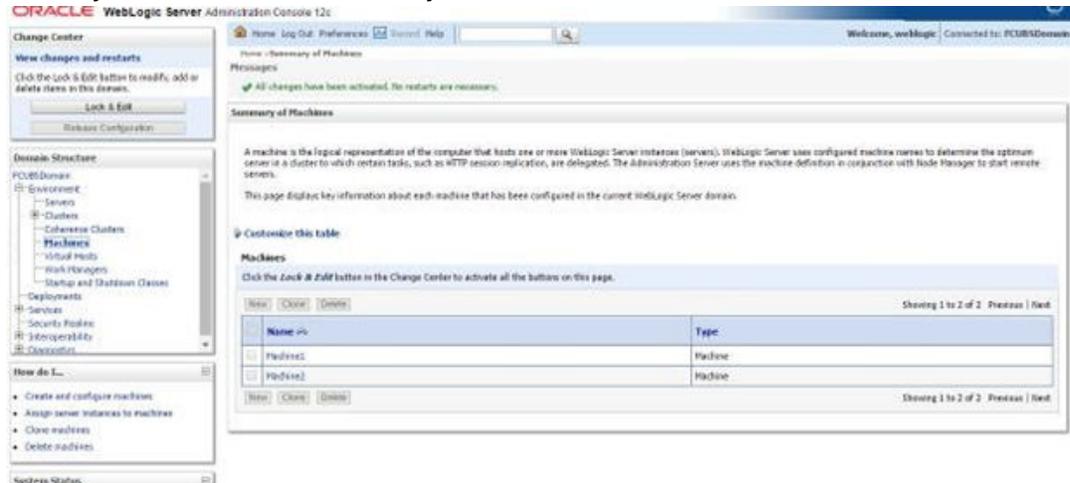

### Verifying machine status


Before starting the managed servers, ensure that the Node manager Status of all the machines are “Reachable”.

In the console, navigate through **Domain structure** → **Machines** → **machine1** → **Monitoring** → **Node Manager Status**. Status should be **Reachable**.

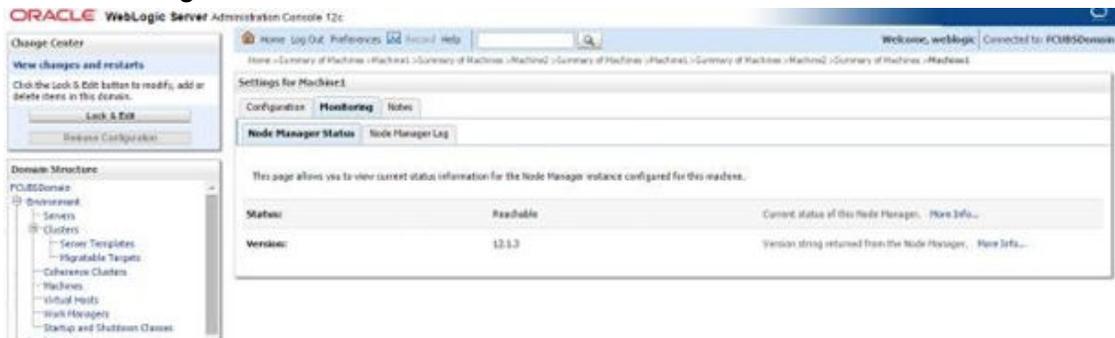


## 3.2 Dynamic Cluster Creation


- Login into Admin Console and Navigate to **FCUBSDomain** → **Environment** → **Clusters** → **New** → select **Dynamic Cluster**.

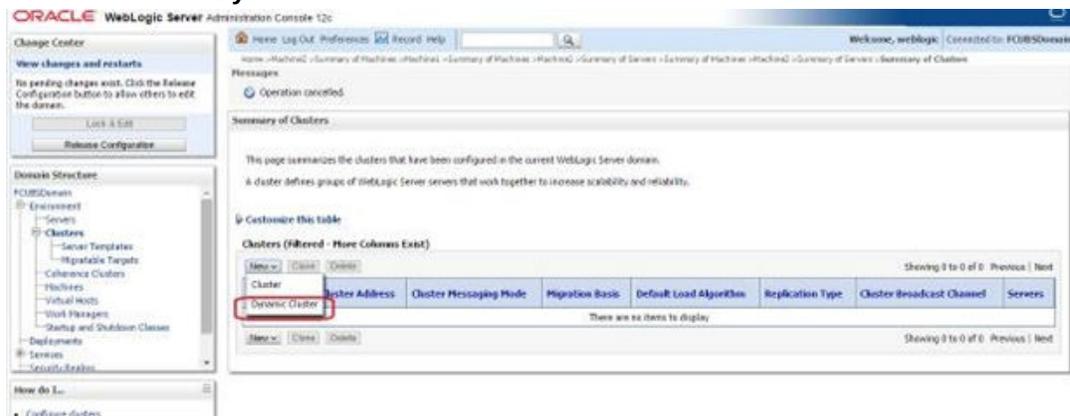


2. Enter the **Cluster Name** and click on **Next**.

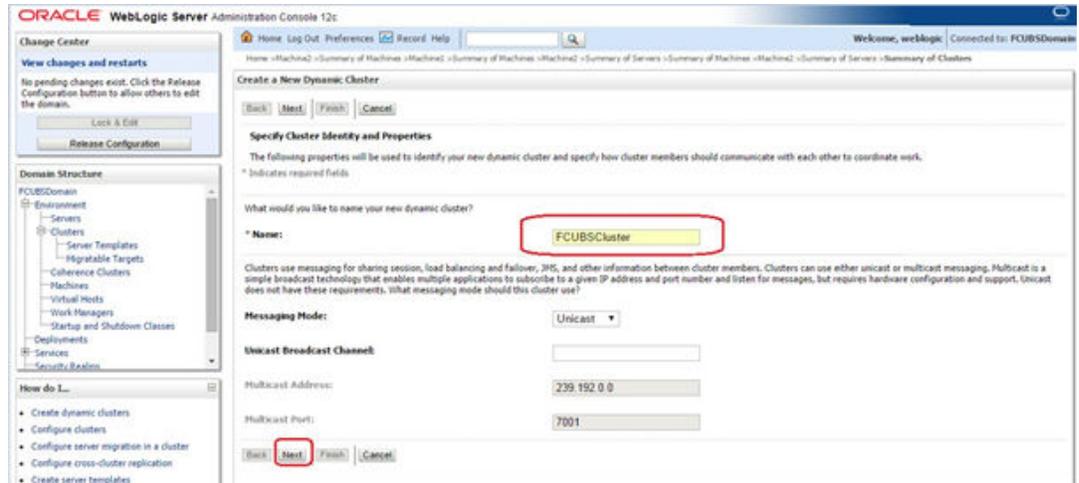

3. Enter the **number of dynamic servers** you want to configure, enter the **server name prefix** and click on **Next**.

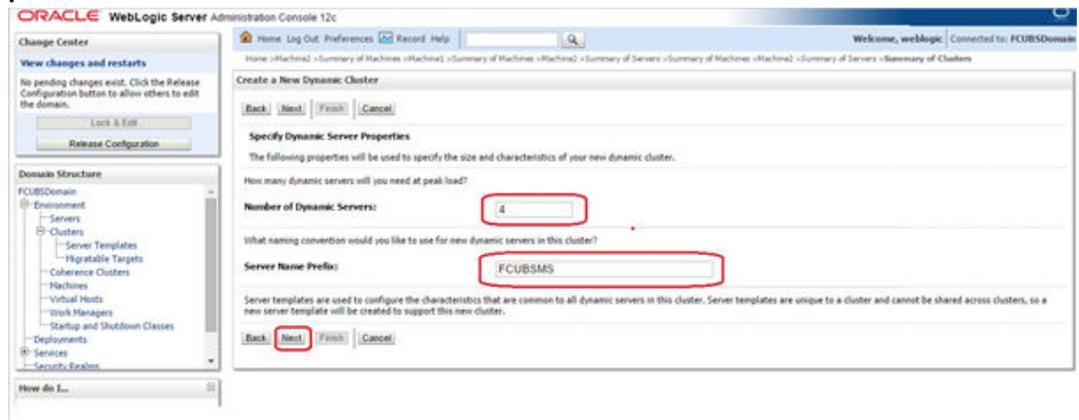


4. Select machines that participate in domain, in this case all machines will be part of the domain, select **Use any machine configured in this domain** option and click on **Next**.

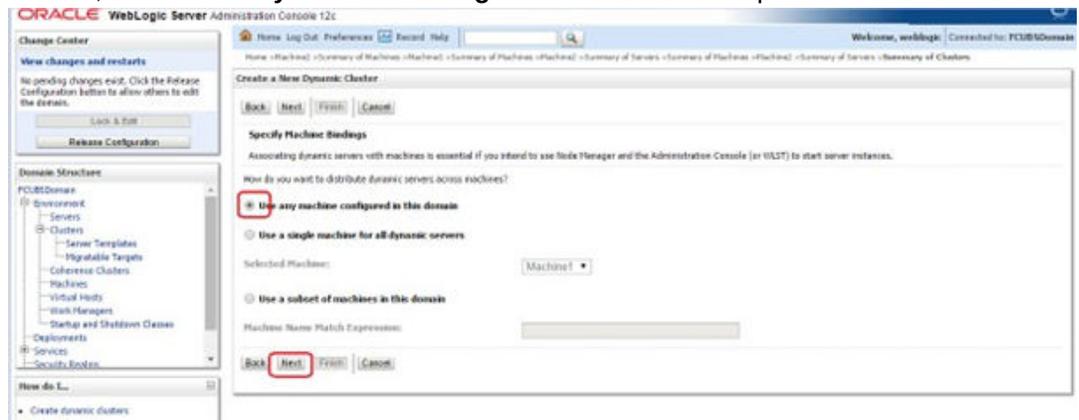


5. Select the **listen port for the first server** in the dynamic cluster and then the **SSL listener port** for the first server in the dynamic cluster. The subsequent servers will be assigned


with an incremental port number. Click **Next**.

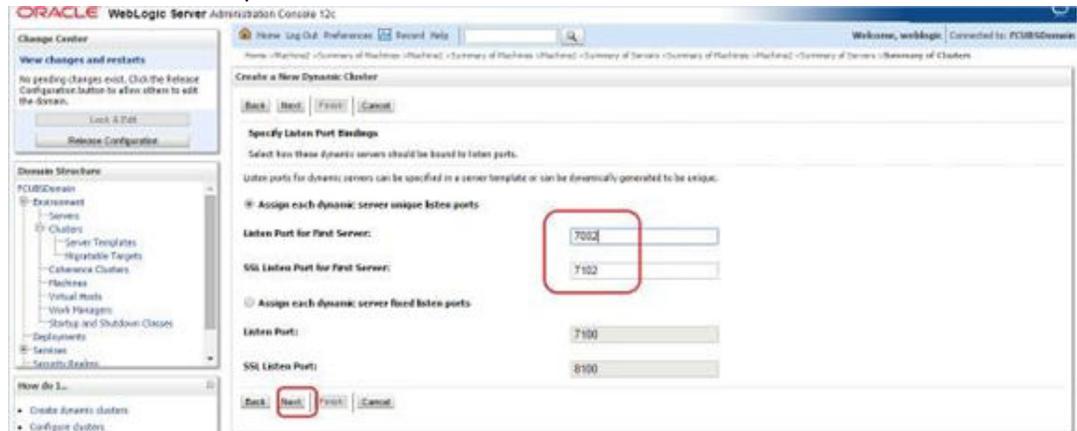


6. A summary of new Dynamic Cluster Configuration is presented. Click **Finish** to create Dynamic Cluster.

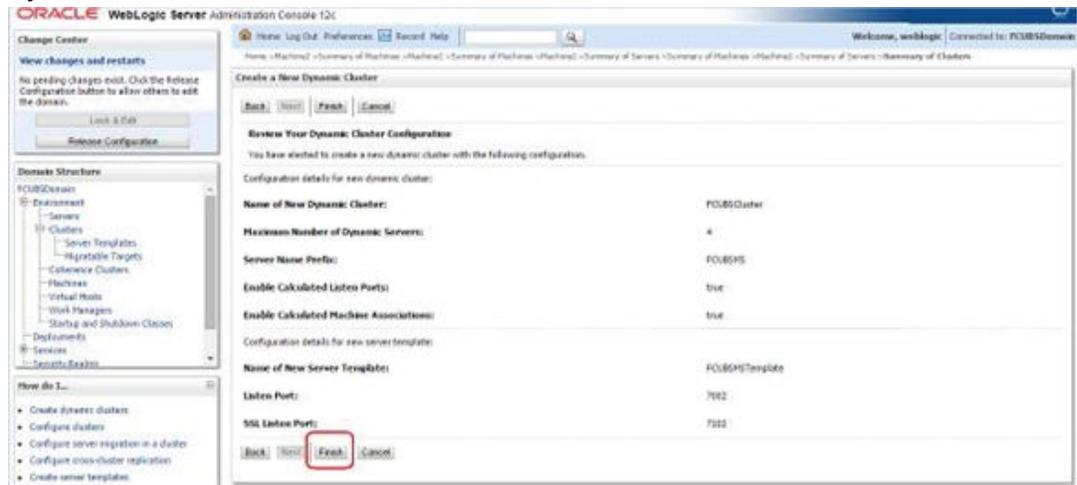


7. The **Summary of Clusters** screens should show the recently created Dynamic Cluster.

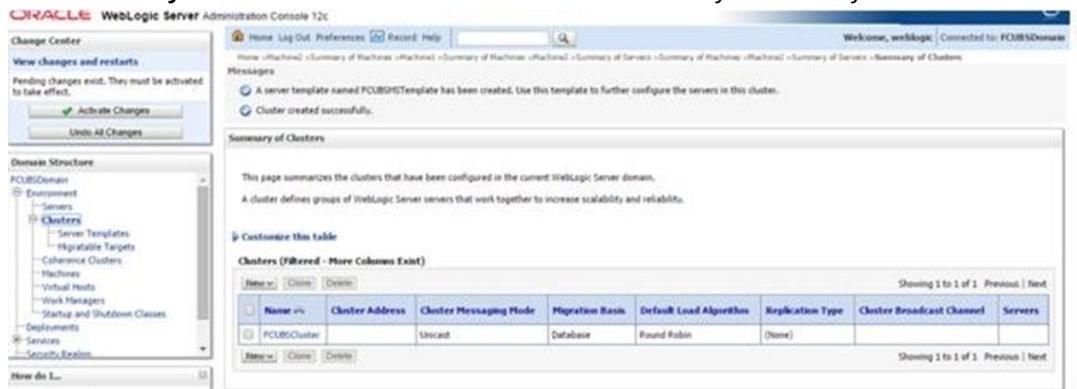

8. Upon **Activate Changes** would automatically create 4 managed servers.

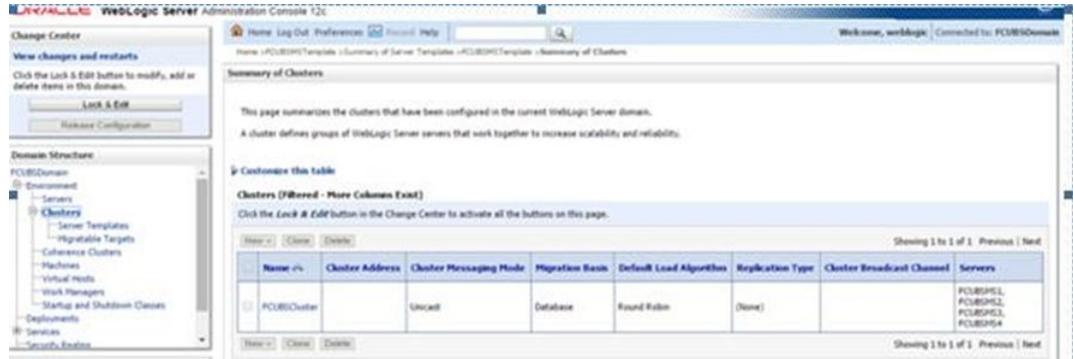

9. Navigate to **FCUBSDomain** → **Environment** → **Servers** tab and 4 new servers are created.

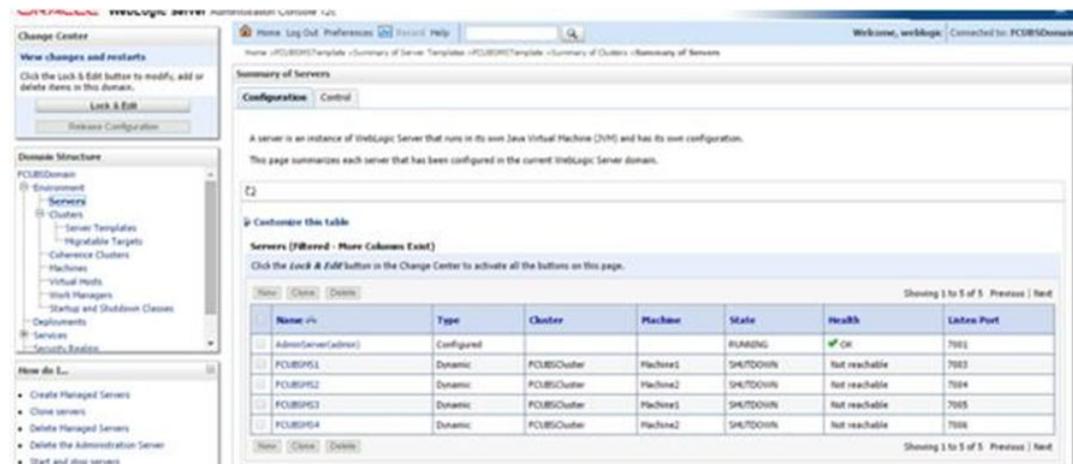

## 3.3 Managed Server Template configuration

The server template created is modified to apply the below parameters:

- Logging
- HTTP Logging
- Stuck Tread Max Time


### 3.3.1 Logging

The process of log file writing in a Weblogic server can impact the performance. Hence, you need to keep the logging to minimum in a production environment.


Update below parameters by in Logging Screen

Minimum Severity to log	Warning
Log file Severity level	Warning
Standard Out Severity level	Critical
Domain broadcaster Severity level	Critical


1. Navigate to **FCUBSDomain** → **Environment** → **Clusters**.

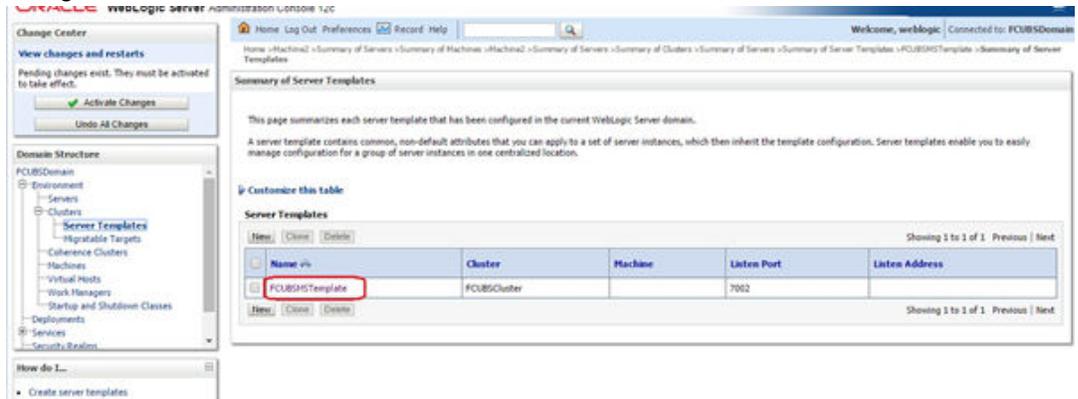

2. Select **FCUBSTemplate** and navigate to **Logging** → **General**.

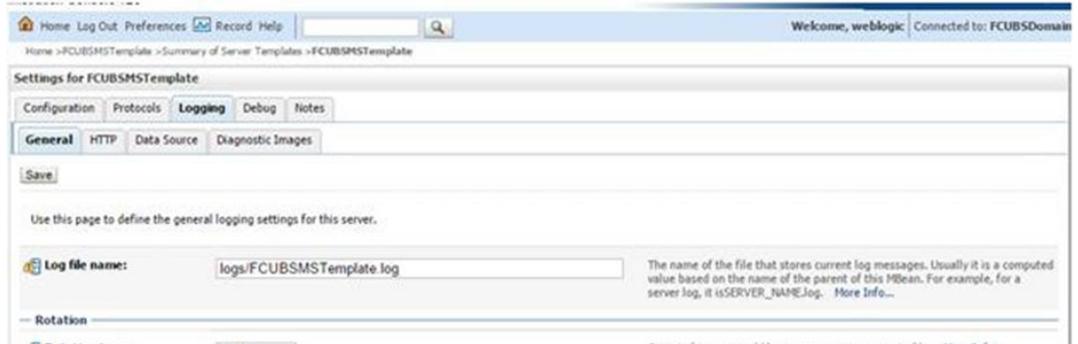

3. Under **Advanced** tab, update the below parameters and click on **Save**.

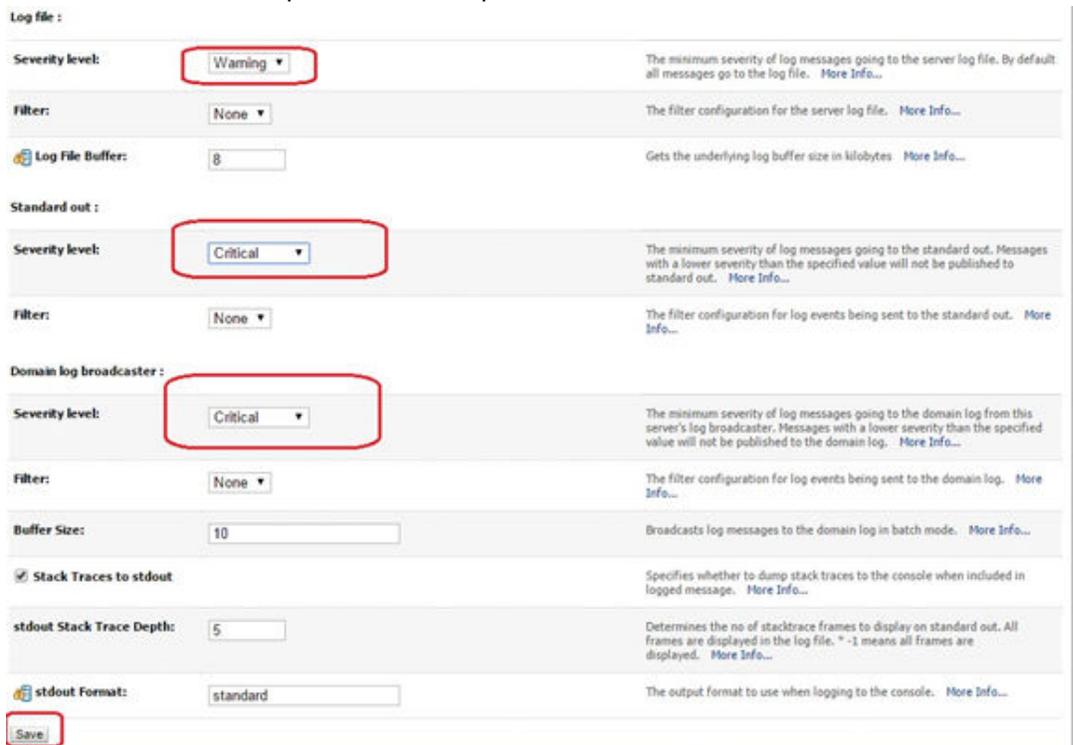

## 3.3.2 HTTP Logging

1. **FCUBSDomain** → **Environment** → **Clusters** → **FCUBSTemplate** → **Logging** → **HTTP**  
→ Uncheck the **Access Logs Flag**.

The screenshot shows the 'Settings for FCUBSMSTemplate' page in the Oracle WebLogic Administration Console. The 'Logging' tab is selected, and the 'HTTP' sub-tab is active. A 'Save' button is visible at the top. Below the 'Save' button, there is a descriptive paragraph: 'Use this page to configure HTTP logging for the server. By default, HTTP logging is enabled and the server saves HTTP requests in a separate log file; it does not store HTTP requests in the server log file or the domain log file.' The main configuration area contains a checkbox labeled 'HTTP access log file enabled', which is currently checked and highlighted with a red rectangular box. To the right of this checkbox is the text: 'Indicates whether this server logs HTTP requests. (The remaining fields on this page are relevant only if you select this check box.) More Info...'. Below this are three fields: 'Log file name:' with the value 'logs/access.log', 'Rotation type:' with a dropdown menu set to 'By Size', and 'Rotation file size:' with the value '5000'. Each field has a 'More Info...' link to its right.

## 3.3.3 Stuck Thread Max Time

- FCUBSDomain** → **Environment** → **Clusters** → **FCUBSTemplate** → **Tuning**, update the stuck thread max time to **18000** and Click on **Save**.

# 4

## Tuning

### 4.1 General Parameters

PARAMETER	VALUE	Navigate To
JTA Time out seconds	18000	Login to Weblogic Server console. Click on the domain name (ex: FCUBSDomain) which is under 'Domain Structure'. Go to Configuration > JTA, parameter and values is found on the right side panel of console.
Session Timeout	900	Login to Weblogic Server console Click on Deployments which is under 'Domain Structure'. Click on the deployed FCJ application from right side panel. Click on FCJNeoWeb from 'Modules and components' Go to Configuration General, the parameter values can be found here.

### 4.2 JVM Tuning

This section of the document provides JVM optimization for Oracle Banking Trade Finance Solution.

Basically the JAVA minimum and maximum heap size needs to be reset for 32 and 64 bit environments. Both the minimum and maximum heap size is set to 1.5GB and 4GB in case of 32 bit and 64 bit environments respectively.

#### How to find whether the JVM is 32bit or 64bit?

Go to \$JAVA\_HOME/bin directory. Check java version using command `./java -d64 -version` 64 bit JVM shows the version details where as 32bit throws an error.

#### How to modify the JVM heap parameters?

To change the JVM heap parameters create a file `setUserOverrides.sh` under domain FCUBSCL in both servers. This file should be created in "**\$WL\_HOME/user\_projects/domains/\$WLS\_DOMAIN/bin**" in both the servers. Paste below contents of `USER_MEM_ARGS` variable accordingly to override the standard memory arguments passed to java for **SUN JDK**.

#### 32 bit JDK

```
USER_MEM_ARGS="-  
  
Dorg.apache.xml.dtm.DTMManager=org.apache.xml.dtm.ref.DTMManagerDefault  
  
-  
  
Dorg.apache.xerces.xni.parser.XMLParserConfiguration=org.apache.xerces.
```

```
parsers.XML11Configuration -Dweblogic.threadpool.MinPoolSize=100 -  
Dweblogic.threadpool.MaxPoolSize=100 -Xms1536M -Xmx1536M -  
XX:MaxPermSize=256m -server -XX:+UseParallelOldGC -  
XX:ParallelGCThreads=4"  
export USER_MEM_ARGS
```

### 64 bit JDK

```
USER_MEM_ARGS="-  
Dorg.apache.xml.dtm.DTMManager=org.apache.xml.dtm.ref.DTMManagerDefault  
-Dorg.a  
pache.xerces.xni.parser.XMLParserConfiguration=org.apache.xerces.parser  
s.XML11Configuration -Dweblogic.threadpool.MinPoolSize=100 -  
Dweblogic.threadpool.MaxPoolSize=100 -Xms8g -Xmx8g -Xmn4g -server  
-XX:+UseParallelOldGC -XX:ParallelGCThreads=4"  
export USER_MEM_ARGS
```



#### Note:

Take a backup of the files before modifying the same.

# 5

## Start Managed Servers

### Starting using scripts

Managed Servers can be started by executing startManagedWebLogic.sh script present in folder **\$DOMAIN\_HOME/bin**

Usage: `./startManagedWebLogic.sh SERVER_NAME {ADMIN_URL}`

Eg: `./startManagedWeblogic.sh FCUBSMS1 https://<hostname1>/console`

### Starting using console

Alternatively, login to admin console, navigate to **FCUBSDomain** → **Environment** → **Servers** → **Control**, select the managed servers to be started and click on **Start**.

The screenshot shows the Oracle WebLogic Server Administration Console interface. The 'Summary of Servers' page is displayed, with the 'Control' tab selected. A table lists the following servers:

Server	Machine	State	Status of Last Action
AdminServer(admin)		RUNNING	None
FCUBSMS1	Machine1	SHUTDOWN	None
FCUBSMS2	Machine2	SHUTDOWN	None
FCUBSMS3	Machine1	SHUTDOWN	None
FCUBSMS4	Machine2	SHUTDOWN	None

A red box highlights the 'Start' button for each server row in the table.

Upon successful startup, the status of Managed servers is changed to **“RUNNING”**.

# 6

## Data Source creation and JDBC Configuration

Following are the JNDI names of those data sources used by Oracle Banking Trade Finance application.

jdbc/fcjdevDS - This datasource is used by Oracle Banking Trade Finance online screen excluding branch screens.

- jdbc/fcjdevDSBranch - This datasource is used by Branch screens.
- jdbc/fcjSchedulerDS - This datasource is used by Quartz scheduler.

### Note:

- jdbc/fcjdevDS should be **NonXA**.
- jdbc/fcjdevDSBranch and jdbc/fcjSchedulerDS should be **XA**


- [Data source creation: non XA](#)
- [XA Datasource](#)
- [JDBC Parameters Tuning](#)

### 6.1 Data source creation: non XA


1. Navigate to **FCUBSDomain** → **Services** → **Data Sources** → **select New > Generic Data Source**.




2. Enter the Name and JNDI Name and Click on Next

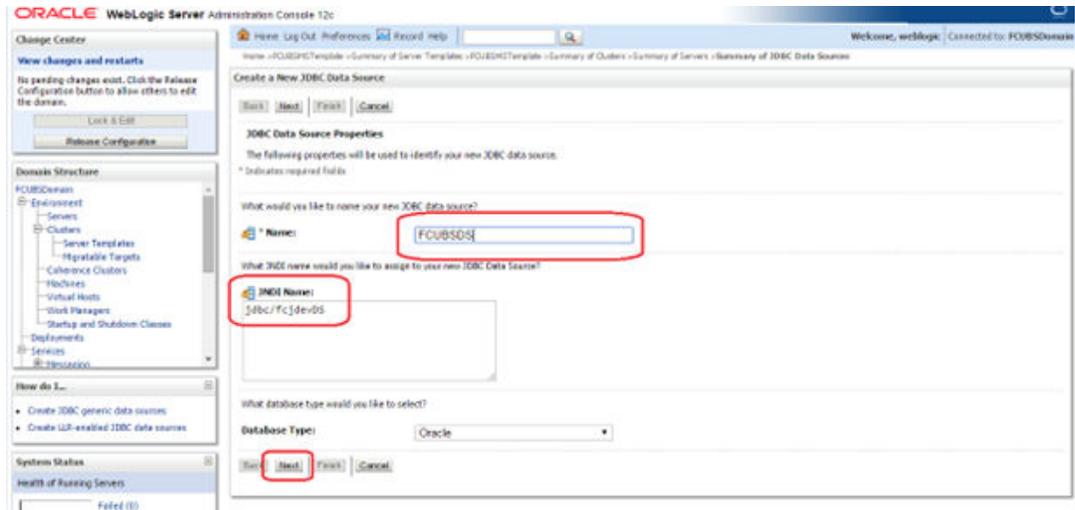


3. Select the Driver as Oracle's Driver(thin) for Instance connection: Versions: Any and Click on Next.

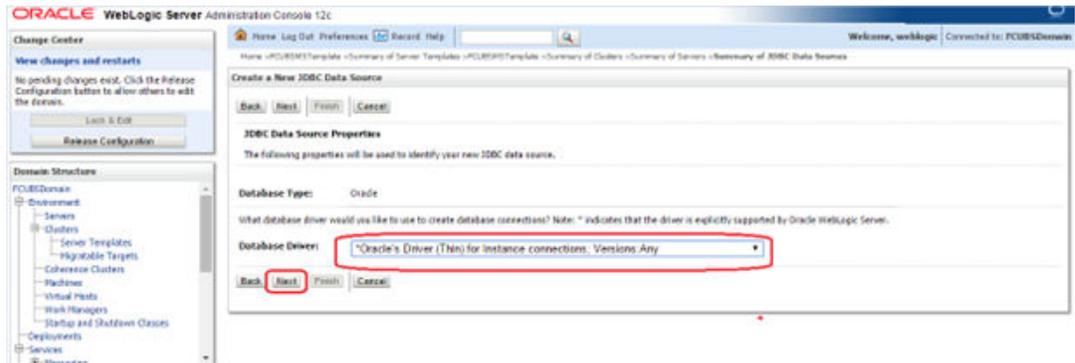

4. Uncheck the Supports Global Transactions and click on Next.

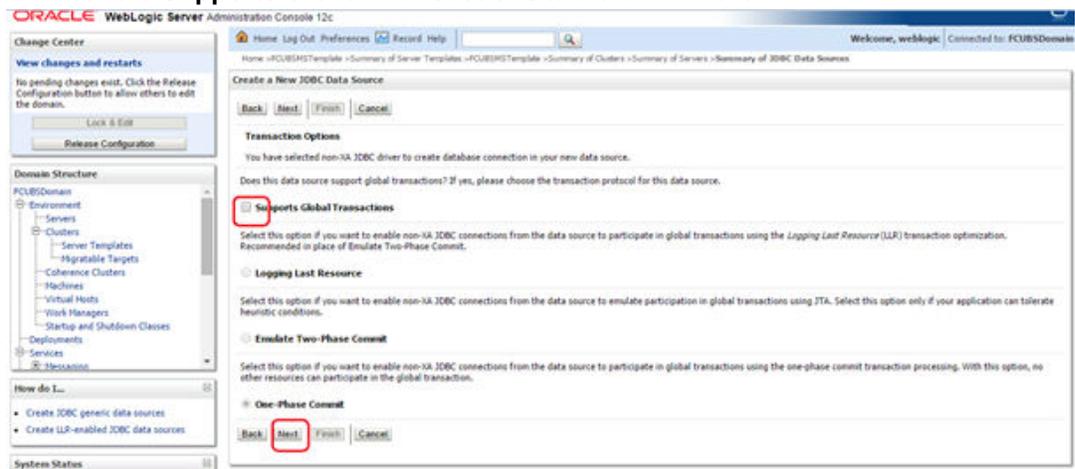

- Enter the **Database Name, Host Name, Port, Database User Name, Password, Confirm Password** and click on **Next**.

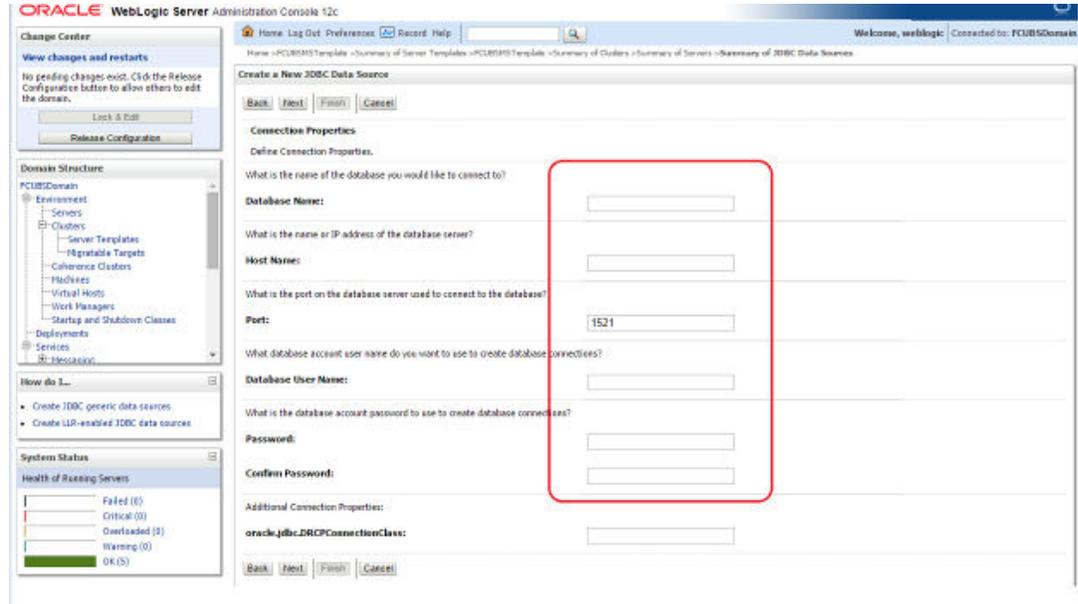

- Replace the **JDBC URL** in the below format and click on **Next**.  
Default URL: jdbc:oracle:thin:@<IP\_Address>:<Port>:<INSTANCE\_NAME>.

Change the default URL to:

```
dbc:oracle:thin:@(DESCRIPTION=(ADDRESS_LIST=(ADDRESS=(PROTOCOL=TCP)
(HOST=xxxxxx.com)(PORT=1521)))(CONNECT_DATA=(SERVICE_NAME=fcubs)))
```

Where,


Scan IP = xxxxxx.com

Service Name = fcubs


Port = 1521

Make sure that in URL, we make the necessary changes.

Then Click on Test Configuration. The connection test should be successful.

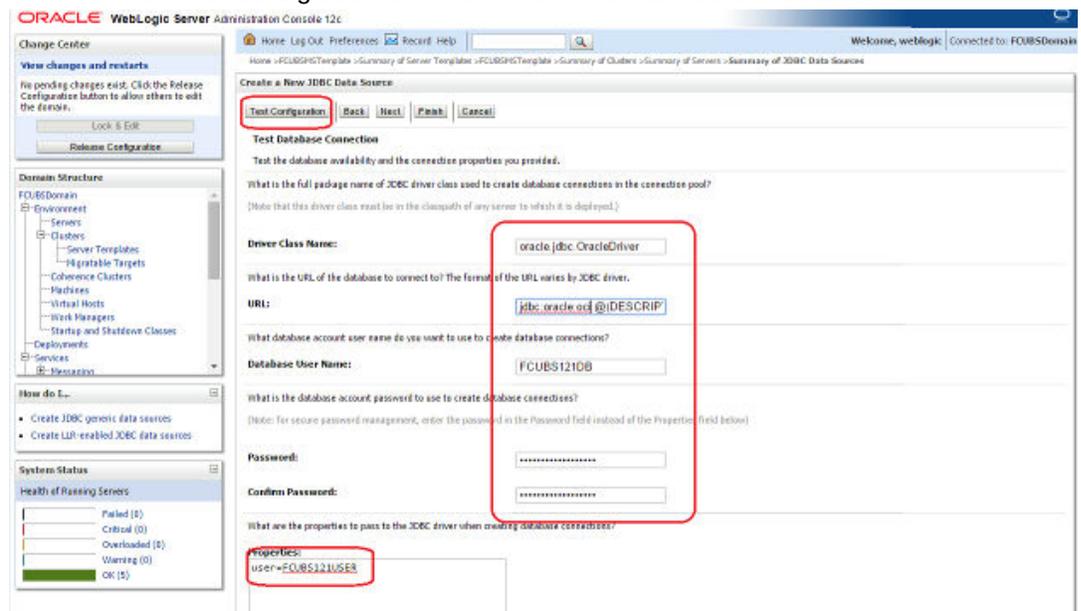


7. Select Target as **FCUBSCluster** and click on **Finish**.

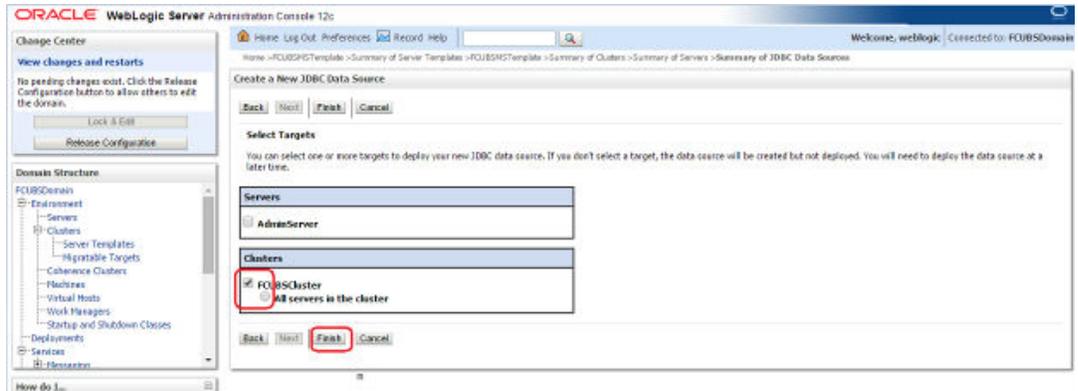


## 6.2 XA Datasource


1. Navigate to **FCUBSDomain** → **Services** → **Data Sources** → select **New > Generic Data Source**.

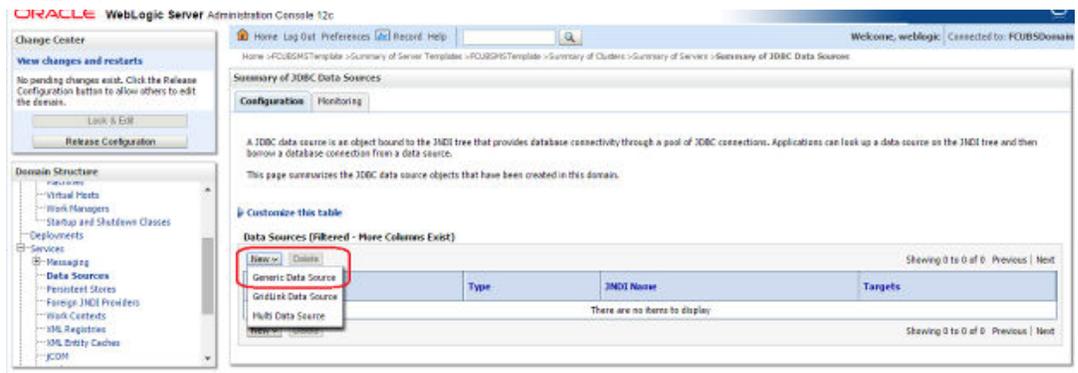


2. Enter the **Name** and **JNDI Name** and Click on **Next**.

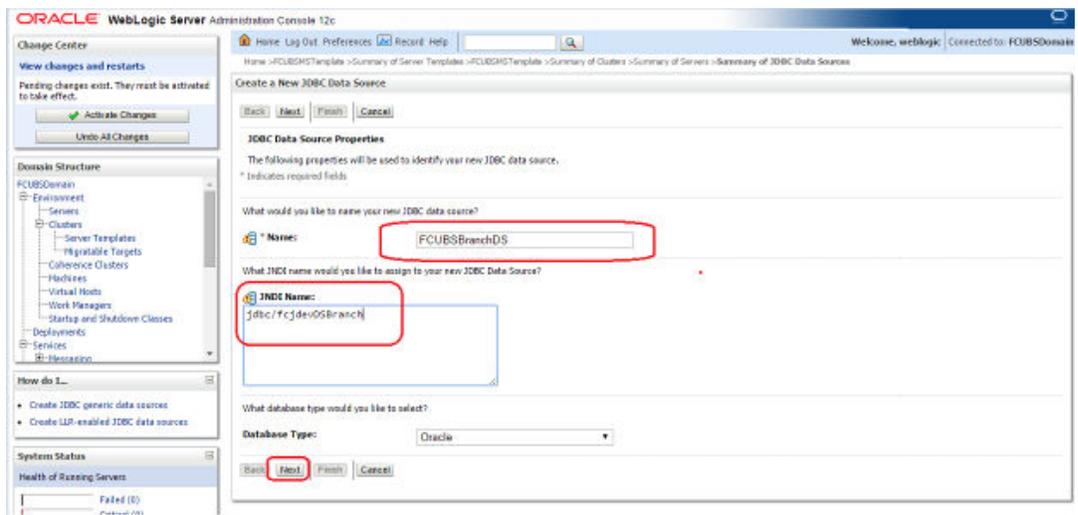


- Select the Driver as **Oracle's Driver(thin XA) for Instance connection: Versions: Any** and Click on **Next**.


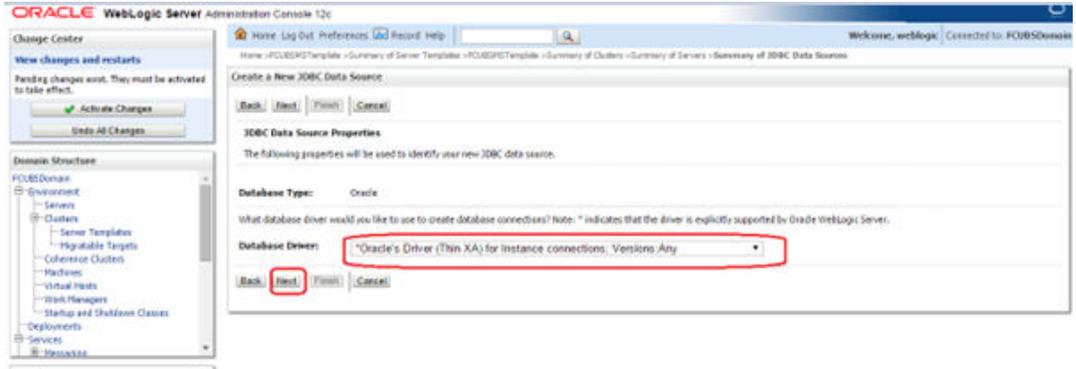


- Click on **Next**.

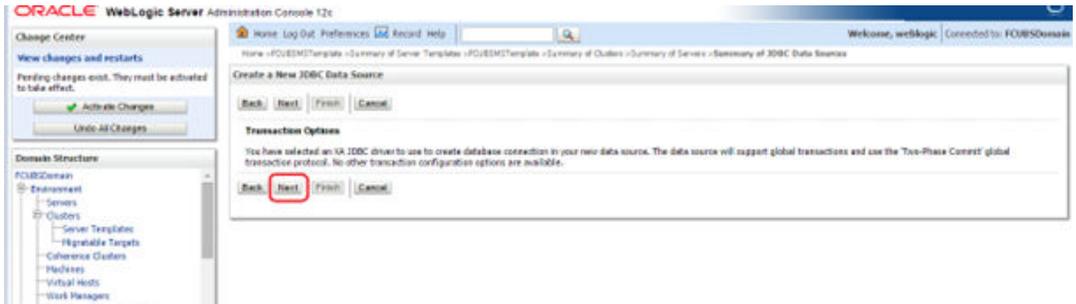

- From this step to target setting step follow as mentioned in non-xa.

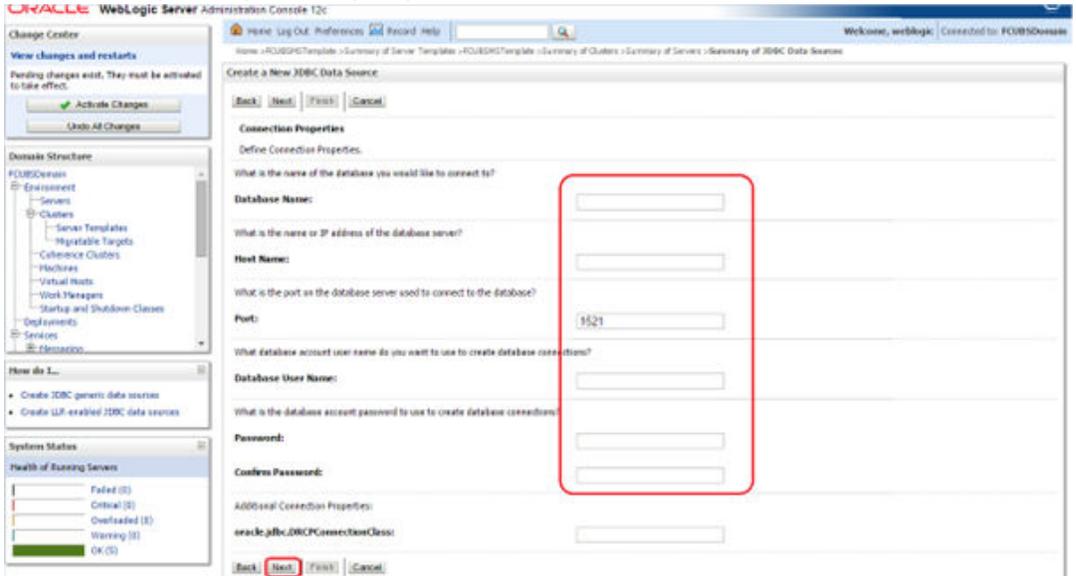


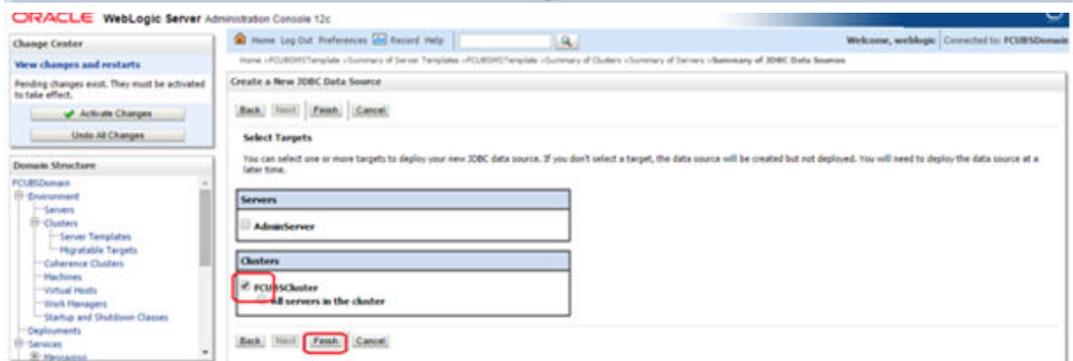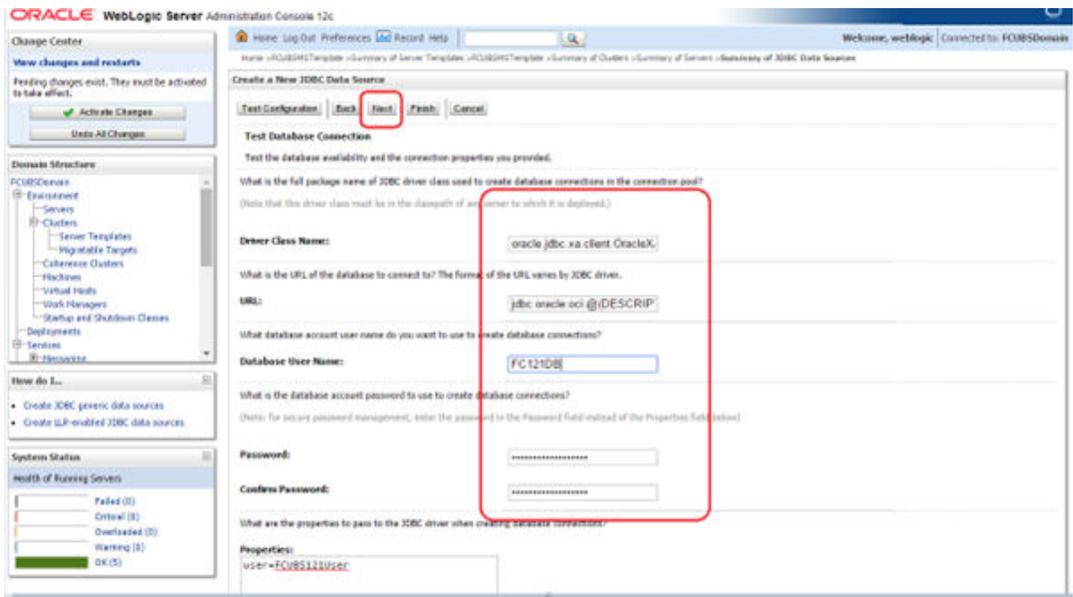

6. Upon **Activate Changes** would create the XA Datasource.



- Similarly create all the other Data Source required for the FCUBS Application and Gateway Deployments.

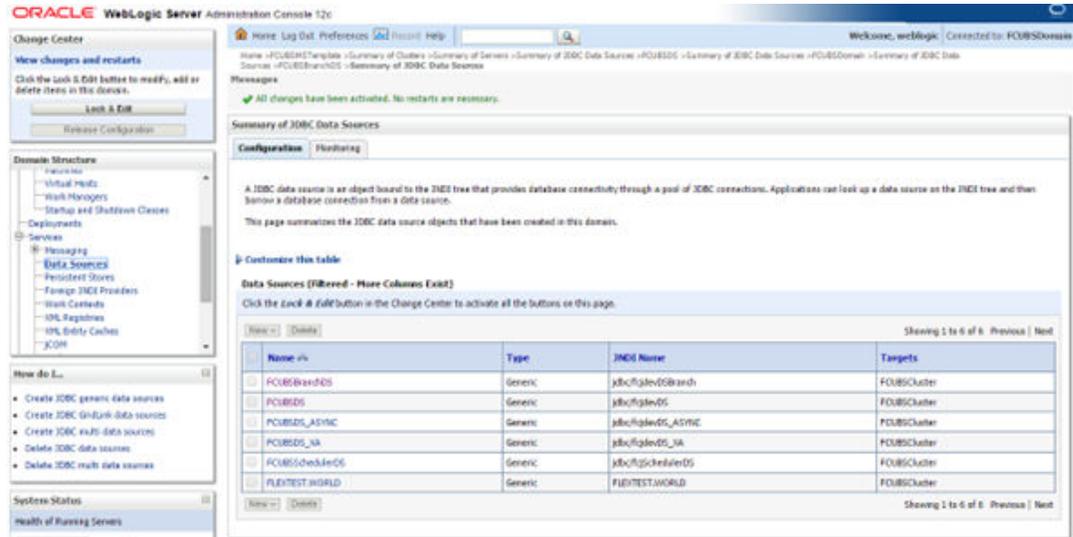

## 6.3 JDBC Parameters Tuning

Below JDBC parameters needs to updated for all the Datasources.

PARAMETER	VALUE	Navigate To
Connection Reserve time out	30	Connection Pool->Advance
Test Frequency	60	Connection Pool->Advance
Inactive connection time out	30	Connection Pool->Advance
Initial Capacity	1	Connection Pool
Max capacity	Based on Site Requirement	Connection Pool
Capacity Increment	5	Connection Pool
Shrink Frequency	900	Connection Pool->Advance
Test Connection on Reserve	Checked	Connection Pool->Advance
Statement Cache Size	50	Connection Pool

# 7

## JMS Resource Creation

JMS Resource Creation involves various steps:

- Persistence Store Creation
- JMS Server Creation
- JMS Module Creation
- Resource Creation: Connection Factory and Queue's

Refer to the Configuring JMS on Weblogic Server for further details on JMS setup.

# 8

## Oracle WebLogic Load Balancing

For Weblogic Load balancing, use

1. Oracle HTTP Server: Refer to Configuration for Oracle HTTP Server for setup.
2. Apache: Refer to Configuration for Apache for setup.

# 9

## Frequently Asked Questions

### 9.1 Machine status is Unreachable

If the machine status is unreachable, means that machine is not reachable and from console you cannot start/stop the managed servers.

In the console, navigate through Domain structure → Machines → machine1 → Monitoring → Node Manager Status will be **Unreachable**.

To change the status, you need to start the node manager on that server. Refer to start node manager section on steps to start the node manager.

### 9.2 How to restart node manager?

1. Locate node manager pid using `ps -ef|grep weblogic.nodemanager.javaHome`
2. Change directory to `$DOMAIN_HOME/bin`
3. Kill the unix process using `kill -9 <pid>`
4. Verify that the node manager is killed by `tail -f nohup.out`
5. Start node manager using `nohup ./startNodeManager.sh &`
6. Verify nodemanager is started using `tail -f nohup.out`

### 9.3 Scaling Up Dynamic Cluster


When the capacity is insufficient and you need to scale-up, you can add dynamic servers on demand. It requires only a few clicks.

1. Navigate to **FCUBSDomain → Environment → Clusters**.


The screenshot shows the WebLogic Server Administration Console interface. On the left, the 'Domain Structure' tree is expanded to 'FCUBSDomain' > 'Environment' > 'Clusters'. The main content area is titled 'Summary of Clusters' and contains a table of cluster configurations. The table has the following data:

Name	Cluster Address	Cluster Messaging Mode	Migration Basin	Default Load Algorithm	Replication Type	Cluster Broadcast Channel	Servers
FCUBSCluster		Unicast	Database	Round Robin	(None)		FCUBSP01, FCUBSP02, FCUBSP03, FCUBSP04

2. Click **FCUBSCluster** → **Configuration** → **Servers** tab.

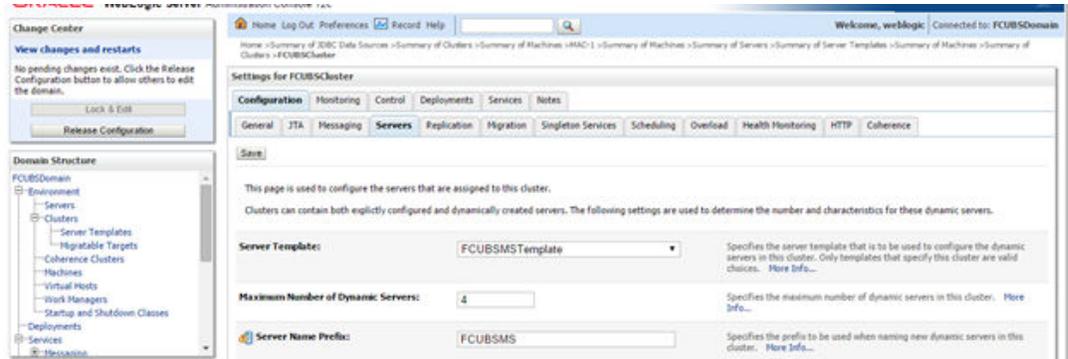

3. Change the **Maximum Number of Dynamic Servers** to 8. Click **Save**.

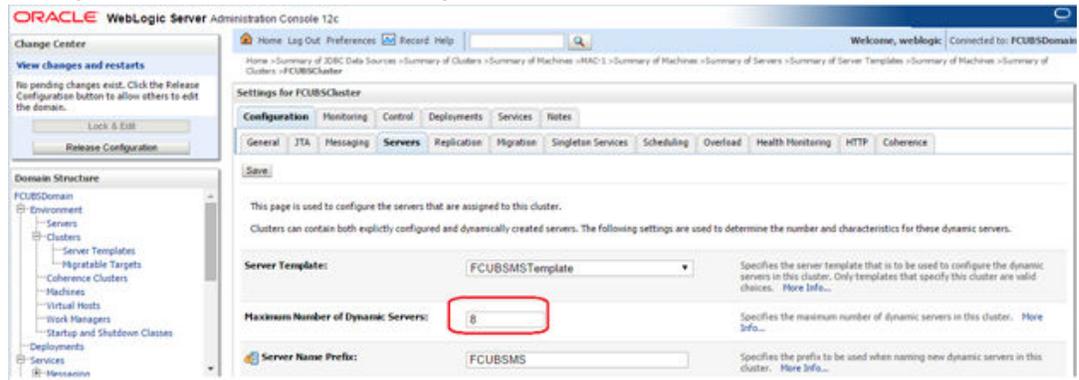

4. Activate changes in the **Change Center** of the WebLogic Console. After activation, 4 new Dynamic Servers are added to the Dynamic Cluster.

Name	Type	Machine	Listen Port
FCUBSH51	Dynamic	MAC-1	7101
FCUBSH52	Dynamic	MAC-2	7102
FCUBSH53	Dynamic	MAC-1	7103
FCUBSH54	Dynamic	MAC-2	7104
FCUBSH55	Dynamic	MAC-1	7105
FCUBSH56	Dynamic	MAC-2	7106
FCUBSH57	Dynamic	MAC-1	7107
FCUBSH58	Dynamic	MAC-2	7108

5. Start the 4 new Dynamic Servers and you have doubled you capacity.

## 9.4 Session Timeout

Session timeouts occur intermittently during load condition. Verify the following:

1. Clock Synchronization: Time across the nodes/machines is same.
2. Session Stickiness in load balancer: Persistence Type in load balancer should be set to SOURCE IP and should not be cookie.