

Oracle® Communications Network Charging and Control

Number Portability Service Pack User's Guide



Release 15.1

April 2025

The Oracle logo, consisting of the word "ORACLE" in white, uppercase, sans-serif font, positioned on a solid red rectangular background.

Copyright

Copyright © 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software" or "commercial computer software documentation" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

About This Document	v
Document Conventions	vi
Chapter 1	
System Overview	1
Overview	1
What is the NP Service Pack	1
Chapter 2	
The NP Service Pack Application.....	3
Overview	3
Accessing the NP Service Pack Application	3
Using the Different Types of Fields	6
Using the Find Screens	7
Chapter 3	
Subscriber and Network	11
Overview	11
Subscriber and Network Screen	11
Routing Destination	16
Routing Number	21
PQYZ	25
DN Range	28
Common Find Panel	38
Chapter 4	
Least Cost Routing	43
Overview	43
Least Cost Routing Screen	43
Rule Set	45
Rule	48
Carrier	54
Chapter 5	
Home Routing.....	59
Overview	59
Home Routing Screen	59
Home Routing.....	61
Home Routing Search	64

About This Document

Scope

The scope of this document includes all functionality a user must know in order to effectively operate the Number Portability Service Pack (NP Service Pack) application. It does not include detailed design of the service.

Audience

This guide is written primarily for NP Service Pack administrators. However, the overview sections of the document are useful to anyone requiring an introduction.

Related Documents

The following documents are related to this document:

- *Number Portability Service Pack Technical Guide*

Prerequisites

Although it is not a prerequisite to using this guide, familiarity with the target platform would be an advantage.

This manual describes system tasks that should only be carried out by suitably trained operators.

Document Conventions

Typographical Conventions

The following terms and typographical conventions are used in the Oracle Communications Network Charging and Control (NCC) documentation.

Formatting Convention	Type of Information
Special Bold	Items you must select, such as names of tabs. Names of database tables and fields.
<i>Italics</i>	Name of a document, chapter, topic or other publication. Emphasis within text.
Button	The name of a button to click or a key to press. Example: To close the window, either click Close , or press Esc .
Key+Key	Key combinations for which the user must press and hold down one key and then press another. Example: Ctrl+P or Alt+F4 .
Monospace	Examples of code or standard output.
Monospace Bold	Text that you must enter.
<i>variable</i>	Used to indicate variables or text that should be replaced with an actual value.
menu option > menu option >	Used to indicate the cascading menu option to be selected. Example: Operator Functions > Report Functions
hypertext link	Used to indicate a hypertext link.

Specialized terms and acronyms are defined in the glossary at the end of this guide.

System Overview

Overview

Introduction

This chapter provides a high-level overview of the application. It explains the basic functionality of the system and lists the main components.

It is not intended to advise on any network or service implications of the product.

In this chapter

This chapter contains the following topics.

What is the NP Service Pack 1

What is the NP Service Pack

Introduction

The Number Portability Service Pack (NP Service Pack), accessed through SMS, provides flexibility and control over call routing of subscribers to the network.

Features

Features of NP Service Pack include:

- The ability to configure ported subscriber information from the screens and/or using the NP Provisioning Interface (PI) commands, and supporting control plan nodes to make services NP/MNP aware
- The ability to configure routing information based on operator assigned number prefixes and supporting control plan nodes to allow services to route to appropriate operators
- Functionality to allow the IN platform to satisfy MNP SRF requirements through a MAP based application (MTA) that can trigger a control plan when a supported message is received. The control plan can then perform MNP and through the appropriate node, instruct the MTA on how to respond (for example, relay, ack or error)
- Simple GTT functionality provided in the MTA for performing relay actions
- Call connection using least cost routing based on predefined carrier selection rule sets
- Home routing for calls within the network
- EDR generation for all calls processed by the network. The EDRs can be used for billing and reporting purposes.

NP feature nodes

The following feature nodes are available for the NP Service within the ACS Control Plan Editor (CPE). You access these feature nodes from the Others group on the feature palette in the CPE:

- NP Destination Selection

Chapter 1

- NP Least Cost Routing
- NP Home Routing
- NP Map Trigger

For more information on NP feature nodes, see *Feature Nodes Reference Guide*.

For information on using the CPE, see *Control Plan Editor User's Guide*.

The NP Service Pack Application

Overview

Introduction

This chapter explains how to access the NP Service Pack application and how to use the screens.

In this chapter

This chapter contains the following topics.

Accessing the NP Service Pack Application	3
Using the Different Types of Fields	6
Using the Find Screens	7

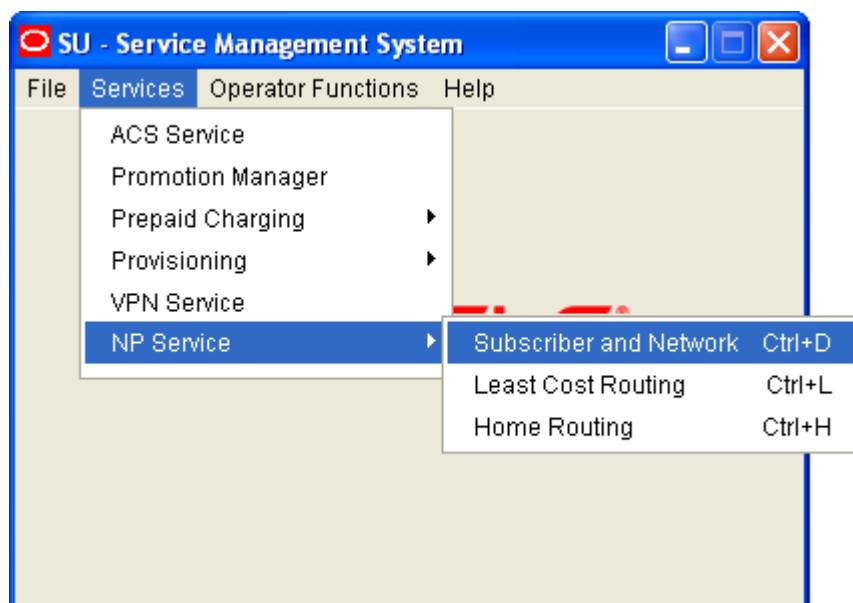
Accessing the NP Service Pack Application

Introduction

The NP Service Pack screens, accessed through SMS, let you configure the database on the SMS. To begin configuring the database, the SMS screens must first be configured and running.

SMS main menu

Here is an example of the Service Management System main menu showing the NP Service Pack menu options.



Accessing the screens

Follow these steps to access the NP Service Pack screens.

Step	Action
1	Select the Services menu from the SMS main screen.
2	Select NP Service . Result: You see the list of NP Service menu options.
3	Choose the menu option you require. Result: You see the screen for the chosen option.

NP Service Pack screens

The NP Service Pack screens let you configure the database. The available screens are:

- *Subscriber and Network* (on page 11)
- *Least Cost Routing* (on page 43)
- *Home Routing* (on page 59)

Example NP screen

Here is an example NP screen, in this case, Subscriber and Network.

The screenshot shows a software window titled "NP/Subscriber and Network - Find mode". At the top, there is a toolbar with buttons for "Find", "New", "Save", "Delete", "Clear", and "Help". Below the toolbar is a tabbed interface with four tabs: "Routing Destination", "Routing Number", "PQYZ", and "DN Range". The "PQYZ" tab is currently selected. The main area of the window contains several input fields and a dropdown menu:

- A text input field labeled "PQYZ".
- A text input field labeled "Routing Destination" with a small "..." button to its right.
- A text input field labeled "Routing Number" with a small "..." button to its right.
- A dropdown menu labeled "Number Type" with the current selection "<Any>".
- A text input field labeled "URI".
- A text input field labeled "Description".

At the bottom of the main area, there is a section titled "Last Change Data" containing:





- A text input field labeled "Last User".
- A text input field labeled "Last Date".
- A dropdown menu labeled "Order By:" with the current selection "PQYZ".

At the very bottom of the window, there is a "Messages:" label followed by a blank space for displaying messages.

On-screen buttons

The application uses a set of buttons to start specific actions within each screen.

The table below describes the function of each button.

Button	Function
	Opens the Find window, enabling you to find records that match the search criteria. When you click Find in the Find screen, an Oracle Like% query is triggered that returns the first 100 records that begin with the selection criteria. For example, if you enter 123 in the Query field, the system will return records such as 123, 1234, 12345, etc.
	Creates a new record template on the current screen. Click Save to save the new record details to the database.
	Saves any changes to the record on the current screen to the database.
	Removes the selected record from the database.
	Clears all entries from the screen, enabling you to clear the screen before adding a new record.
	Opens context-sensitive Help containing information about the functionality available in the current screen.
	Returns you to the previous screen in the screen hierarchy. Note: Any changes that have been made on-screen will not be saved (unless Save has been clicked previously).

Using the Different Types of Fields

Introduction

The following field types appear on the screens:

- Drop-down lists
- Text boxes

Text box

Use text boxes to type data directly on screen.

Name

Drop-down list box

Drop-down lists are identified from text boxes by a small arrow to the right of the field.

When you click on this arrow, you will see a list of values available for this field.

You can then select the appropriate value from this list.

Language

Using the Find Screens

Introduction

Find screens enable you to find records that match the selection criteria. All find screens contain the following:

- Buttons
- Query fields

Example NP find screen

Here is an example NP screen in Find mode. You see the available query fields in the screen, and the screen title indicates that you are in Find mode.

NP/Subscriber and Network - Find mode

Find New Save Delete Clear Help

Routing Destination Routing Number **PQYZ** DN Range Common Find Panel

PQYZ

Routing Destination ...

Routing Number ...

Description

Last Change Data

Last User:

Last Date:

Order By: PQYZ ▼

Messages:

Searching the database

Follow these steps to search the database.

- | Step | Action |
|------|---|
| 1 | <p>Enter selection criteria in one or more query fields and click Find.
 If a field is left empty, the search retrieves all instances of that field.
 Result: This triggers an Oracle Like% query that returns the first 100 records that begin with the selection criteria. For example, if you enter 123 in a query field, the system returns records such as 123, 1234, 12345 ...
 The results appear in the table on the Find result mode screen.</p> |

NP/Subscriber and Network - Find result mode

Find New Save Delete Clear Help

Routing Destination Routing Number **PQYZ** DN Range Common Find Panel

PQYZ	Routing Destination	Routing Number	Number Type	URI	Description	Last User	Last Date
32661	TEST1	551				SMF	2014-01-13 18:10:3...
32662	TEST2	552				SMF	2014-01-13 18:10:3...
32663	TEST3	553				SMF	2014-01-13 18:10:3...

Previous Next Select Export Print Return



Messages: Displaying page 1 of 1 pages: 3 records found that matched your query

Note: The first 100 records entered in the database are displayed in no particular order. If you do not find the record you are searching for, conduct a more specific search.

- | | |
|---|---|
| 2 | <p>To view a record in Update mode, highlight the record line and click Select.
 Result: You see the record details in Update mode.</p> |
| 3 | <p>To delete a record, highlight the record line and click Delete.</p> |

Find result mode buttons

The table below describes the function of each button displayed at the bottom of the screens when in Find result mode.

Button	Function
	Goes back to the previous set of records in the table, if you have used the Next button to display more records.
	Displays the next set of records, if all the Find results cannot be displayed in the table at one time.
	Selects the record highlighted in the table and displays it on the tab in Update mode.
	Exports the Find results to a file.
	Prints the Find results.
	Returns you to the Find mode screen for the tab.

Subscriber and Network

Overview

Introduction

This chapter explains how to define information that is used in an NP/MNP environment using the NP Service Pack Subscriber and Network screens.

In this chapter

This chapter contains the following topics.

Subscriber and Network Screen.....	11
Routing Destination	16
Routing Number	21
PQYZ	25
DN Range	28
Common Find Panel.....	38

Subscriber and Network Screen

Introduction

The NP/Subscriber and Network screen allows you to define:

- Logical operator names
- The network routing numbers associated with operators
- The operator ranges associated with operators (through prefixes or ranges)
- Ported subscriber information.

It also allows you to map operator names and ported subscribers to routing numbers. It contains the following tabs:


- Routing Destination
- Routing Number
- PQYZ
- DN Range
- Common Find Panel

Accessing the Destination Selection screen

Follow these steps to access the Subscriber and Network screen.


Step	Action
1	Select the Services menu from the SMS main screen.
2	Select NP Service .
	Result: You see the list of NP Service menu options.

Step	Action
------	--------

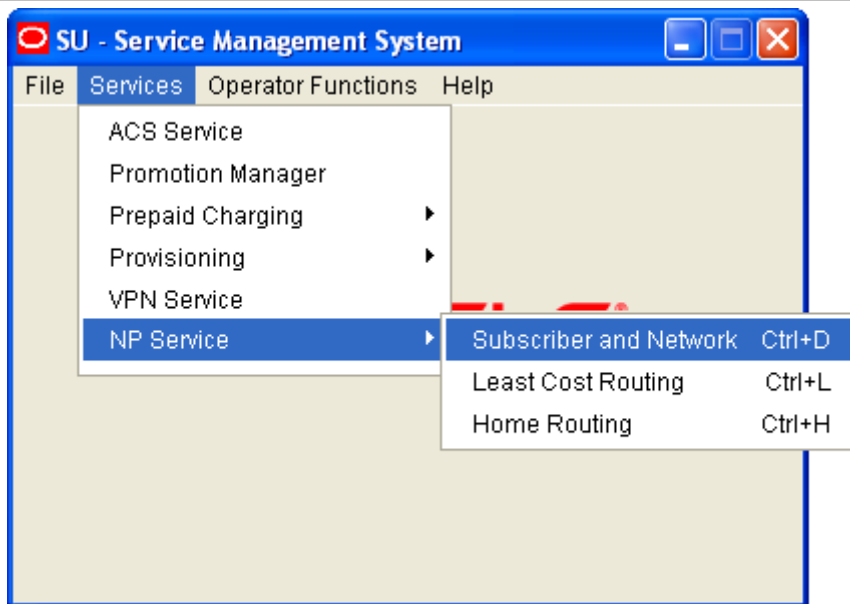

3 Select **Subscriber and Network**.

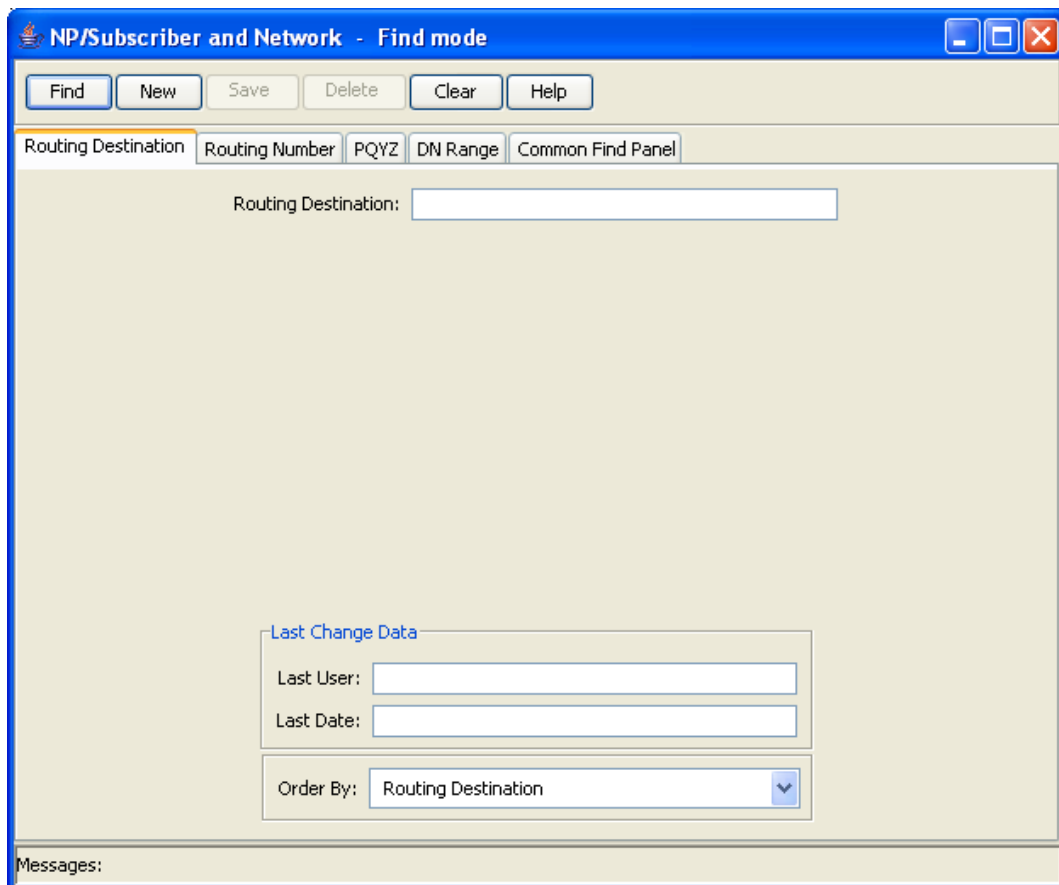Result: You see the **Routing Destination** tab on the NP/Subscriber and Network screen in Find mode.




Using the Routing Destination Search Dialog


You can use the Routing Destination Search Dialog to find an existing Routing Destination record on any tab that has a search button next to the **Routing Destination** field.

Follow these steps to search for a Routing Destination in the Routing Destination Search Dialog.

Step	Action
1	Click the button to the right of the Routing Destination field. Result: You see the Routing Destination Search Dialog.

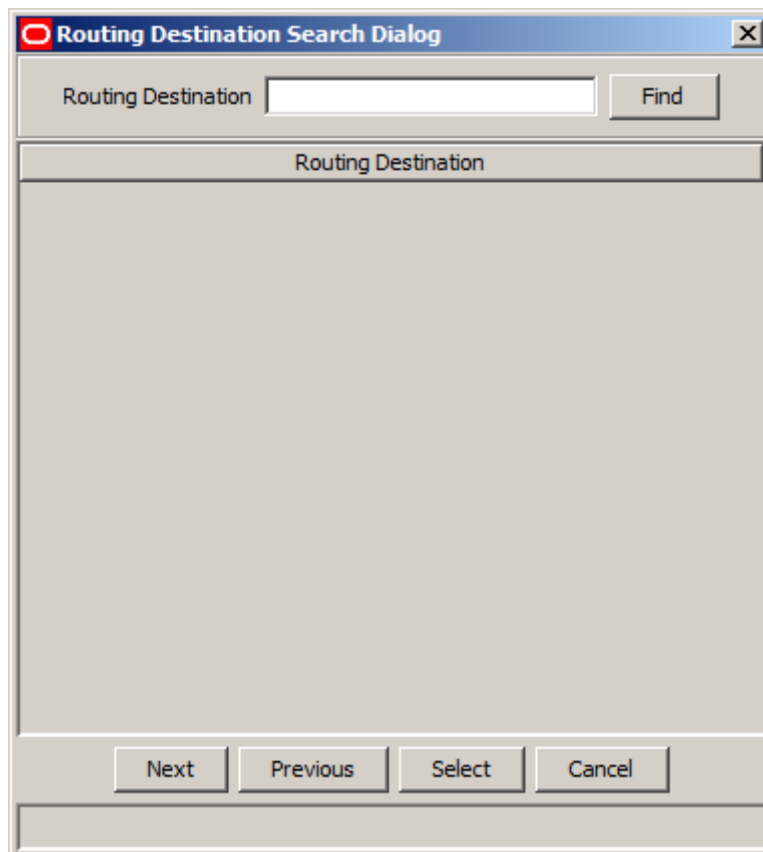

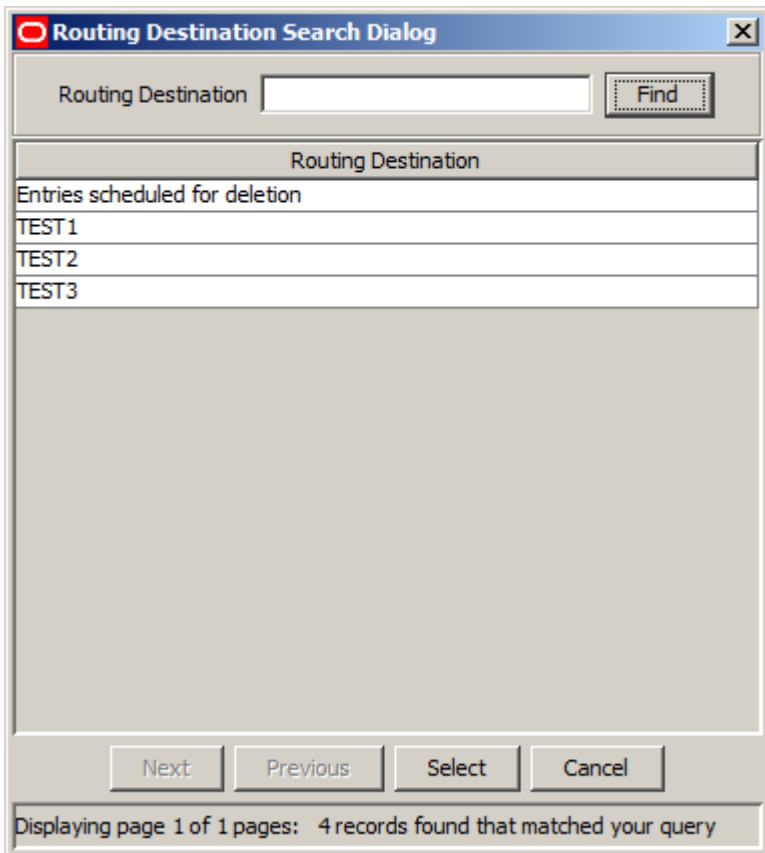- 2 Enter the search criteria in the **Routing Destination** query field and click **Find**.
If the field is left empty, the search retrieves all Routing Destinations.
Result: All routing destinations that match the search criteria are displayed.

Step	Action
	 The image shows a 'Routing Destination Search Dialog' window. At the top, there's a title bar with a red 'X' icon and the text 'Routing Destination Search Dialog'. Below the title bar is a search field labeled 'Routing Destination' with a 'Find' button to its right. Underneath the search field is a table with the header 'Routing Destination'. The table contains three rows: 'Entries scheduled for deletion', 'TEST1', 'TEST2', and 'TEST3'. Below the table is a large empty rectangular area. At the bottom of the dialog are four buttons: 'Next', 'Previous', 'Select', and 'Cancel'. At the very bottom, a status bar reads 'Displaying page 1 of 1 pages: 4 records found that matched your query'.

- To select the Routing Destination you want, highlight it in the table and click **Select**.
Result: Your selection is inserted into the **Routing Destination** field.

Using the Routing Number Search Dialog


You can use the Routing Number Search Dialog to find an existing Routing Number record on any tab that has a search button next to the **Routing Number** field.

Note: If the Routing Destination field is also present on the tab, the available Routing Numbers depend on the Routing Destination selected.

Follow these steps to search for a Routing Number in the Routing Number Search Dialog.

Step	Action
1	Click the button to the right of the Routing Number field. Result: You see the Routing Number Search Dialog.


Step	Action
------	--------

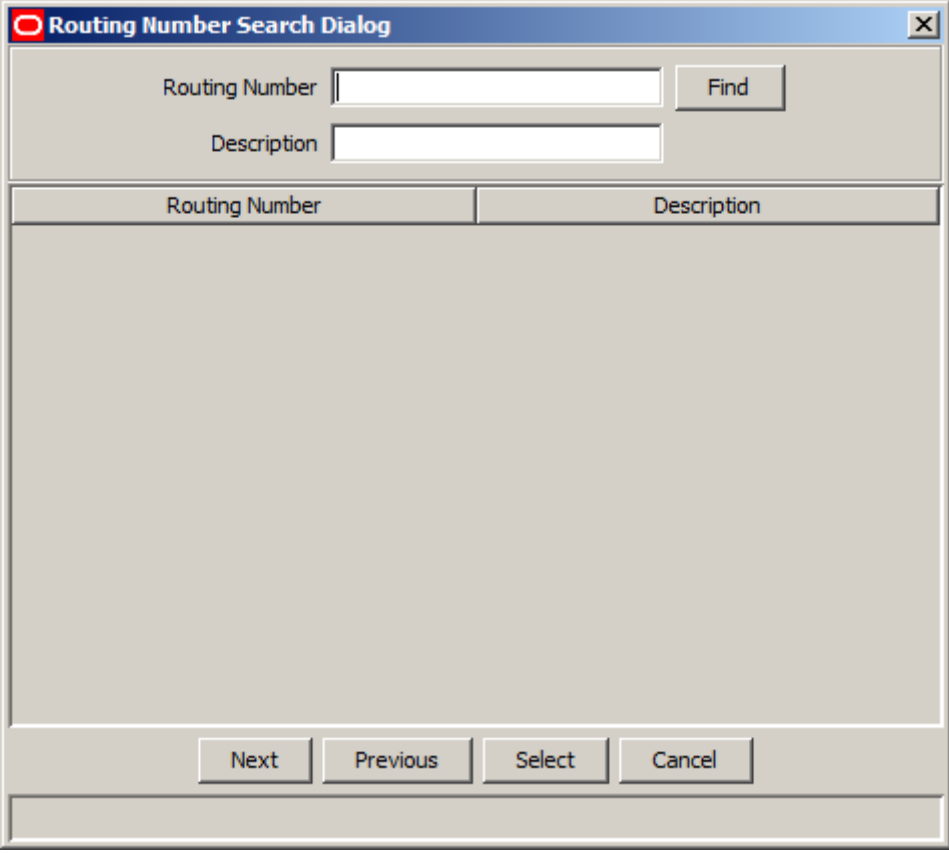

The image shows a software dialog box titled "Routing Number Search Dialog". It features a search interface with two input fields: "Routing Number" and "Description". A "Find" button is positioned to the right of the "Routing Number" field. Below the input fields is a large, empty rectangular area intended for displaying search results. At the bottom of the dialog, there are four buttons: "Next", "Previous", "Select", and "Cancel". The dialog box has a standard Windows-style title bar with a close button in the top right corner.

- 2 Enter the search criteria in the query fields and click **Find**.
If the field is left empty, the search retrieves all instances of that field.
Result: All routing numbers that match the search criteria are displayed.

Step	Action
------	--------

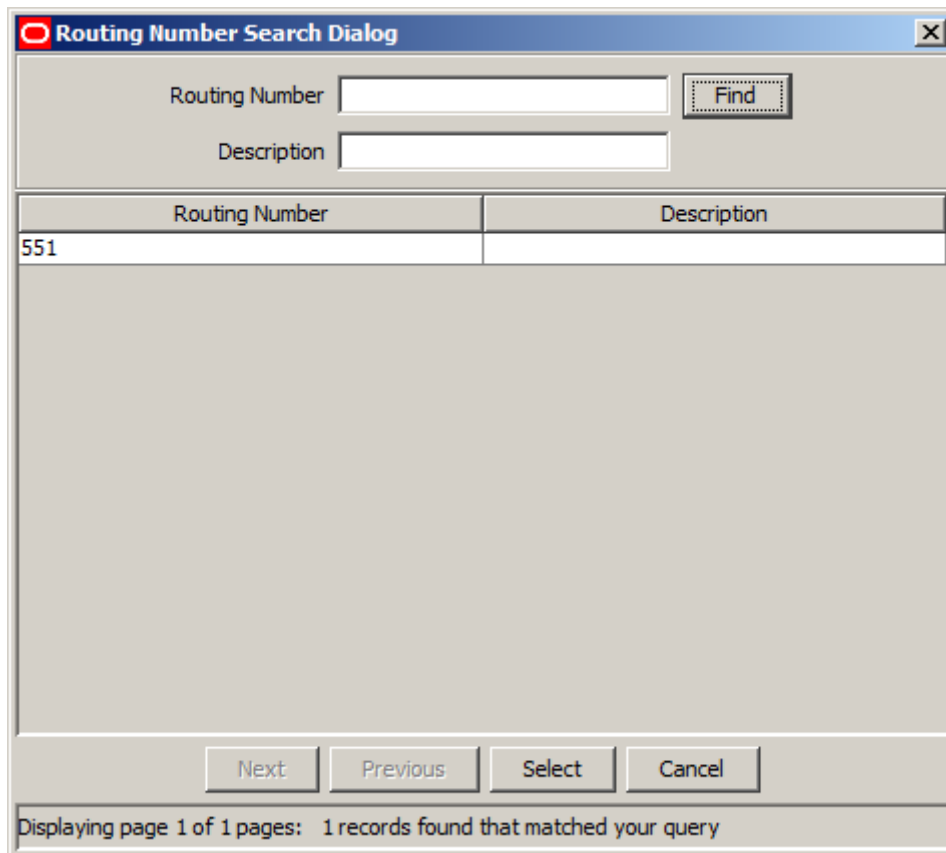

The screenshot shows a 'Routing Number Search Dialog' window. At the top, there are two input fields: 'Routing Number' and 'Description', with a 'Find' button to the right of the 'Routing Number' field. Below these fields is a table with two columns: 'Routing Number' and 'Description'. The table contains one row with the value '551' in the 'Routing Number' column. At the bottom of the dialog, there are four buttons: 'Next', 'Previous', 'Select', and 'Cancel'. Below the buttons, a status bar reads 'Displaying page 1 of 1 pages: 1 records found that matched your query'.

Routing Number	Description
551	

- 3 To select a Routing Number, highlight it in the table and click **Select**.
Result: Your selection is inserted into the **Routing Number** field.

Routing Destination

Introduction

The **Routing Destination** tab allows you to define the names for operators that are relevant in the operator's environment.

Routing Destination tab

Here is an example **Routing Destination** tab in Find mode on the NP/Subscriber and Network screen.

The screenshot shows a software window titled "NP/Subscriber and Network - Find mode". The window has a blue title bar with standard minimize, maximize, and close buttons. Below the title bar is a toolbar with buttons for "Find", "New", "Save", "Delete", "Clear", and "Help".

Below the toolbar is a tabbed interface. The "Routing Destination" tab is selected and highlighted with an orange border. Other tabs visible are "Routing Number", "PQYZ", "DN Range", and "Common Find Panel".

Inside the "Routing Destination" tab, there is a large text input field labeled "Routing Destination:". Below this field, there is a section titled "Last Change Data" which contains two input fields: "Last User:" and "Last Date:". Below these is an "Order By:" dropdown menu currently set to "Routing Destination".

At the bottom of the window is a "Messages:" section, which is currently empty.

Adding a routing destination

Follow these steps to Add a new routing destination.

Step	Action
1	Select the Routing Destination tab in the NP/Subscriber and Network - Find mode screen, and click New . Result: You see the Routing Destination tab in New mode.

- 2 In the **Routing Destination** field, enter a unique value for the routing destination to add. It can be up to 64 alpha-numeric characters long.
 - 3 Click **Save**.
 - 4 Repeat steps 2 to 3 for each routing destination to add.
- Note:** When you click **Save**, the saved values remain on the screen. You can create another new record by typing over these values and clicking **Save** again.
- 5 Click **Return** to go back to the previous screen.

Editing a routing destination

Follow these steps to edit a routing destination.

Step	Action
1	In Find mode, on the Routing Destination tab, find and select the record to edit. For more information on finding and selecting routing destination records, see <i>Finding a routing destination</i> (on page 19). Result: The selected record appears in Update mode on the Routing Destination tab.
2	Edit the details as described in <i>Adding a routing destination</i> (on page 18).
3	Click Save , and then Return , to save your changes and return to the previous screen.

Deleting a routing destination

Follow these steps to delete a routing destination.

Note: You cannot delete routing destinations that are referenced elsewhere in the system, such as in PQYZ or Routing Number records.

Step	Action
1	In Find mode, on the Routing Destination tab, find and select the record to delete. For more information about finding and selecting routing destinations, see <i>Finding a routing destination</i> (on page 19).
2	Click Delete . Result: The Confirm Delete Record screen appears.
3	Click Yes to confirm. Result: The record is removed from the database.
4	Click Return to return to the previous screen.

Finding a routing destination

Follow these steps to search the database for a specific routing destination.

Step	Action
1	Ensure you are in Find mode on the Routing Destination tab.
2	Enter the selection criteria in one or more query fields and click Find . If a field is left empty, the search retrieves all instances of that field.

Step	Action
------	--------

Result: This triggers an Oracle Like% query that returns the first 100 records that begin with the selection criteria. For example, if you enter 123 in a query field, the system will return records such as 123, 1234, 12345, ...

The search results appear in the table on the **Routing Destination** tab in Find result mode.

Routing Destination	Last User	Last Date	ID
Entries scheduled for deletion	SMF	2014-01-13 16:39:30.0	1
TEST1	SMF	2014-01-13 18:10:35.0	3
TEST2	SMF	2014-01-13 18:10:35.0	4
TEST3	SMF	2014-01-13 18:10:35.0	5

Messages: Displaying page 1 of 1 pages: 4 records found that matched your query

Note: The first 100 records entered in the database are displayed in no particular order. If you do not find the record you are searching for, conduct a more specific search.

- 3 To view a record in Update mode, highlight the record line and click **Select**.
- 4 To delete a record, highlight the record line and click **Delete**.

Routing Number

Introduction

The **Routing Number** tab allows you to define nationally recognized network routing numbers and logical network element numbers (numbers recognized within a network). You can then assign operator names to the routing numbers by associating them with routing destinations.

Note: The routing destination must have been previously defined on the **Routing Destination** tab.

DEAD routing number

The 'DEAD' routing number is created automatically during installation. It is a special routing number which when allocated to a subscriber dn range identifies the dn range entry as being scheduled for purging.

Note: The 'DEAD' routing number cannot be modified or deleted.

Routing Number tab

Here is an example **Routing Number** tab in Find mode on the NP/Subscriber and Network screen.

The screenshot shows a window titled "NP/Subscriber and Network - Find mode". At the top, there are buttons for "Find", "New", "Save", "Delete", "Clear", and "Help". Below these are tabs for "Routing Destination", "Routing Number" (which is selected), "PQYZ", "DN Range", and "Common Find Panel".

The main area contains three input fields: "Routing Number", "Routing Destination" (with a dropdown arrow), and "Description".

Below these fields is a section titled "Last Change Data" containing two input fields: "Last User:" and "Last Date:". At the bottom of this section is an "Order By:" dropdown menu currently set to "Routing Number".

At the very bottom of the window is a "Messages:" label.

Adding a routing number

Follow these steps to Add a new routing number.

Step	Action
1	Select the Routing Number tab in the NP/Subscriber and Network - Find mode screen, and click New . Result: You see the Routing Number tab in New mode.

- 2 In the **Routing Number** field, enter a unique value for the routing number to add. It can be up to eight hexadecimal characters long.
- 3 In the **Routing Destination** field, enter the routing destination for the routing number. You must enter a valid routing destination (one that already exists in the database).

Note: If you do not know the routing destination, you can click the button to the right of this field to search for it using the Routing Destination Search Dialog. See *Using the Routing Destination Search Dialog* (on page 13) for details.

- 4 If required, in the **Description** field enter a description for the routing number.
- 5 Click **Save**.
- 6 Repeat steps 2 to 5 for each routing number to add.

Note: When you click **Save**, the saved values remain on the screen. You can create another new record by typing over these values and clicking **Save** again.

- 7 Click **Return** to go back to the previous screen.

Editing a routing number

Follow these steps to edit a routing number.

Step	Action
1	In Find mode, on the Routing Number tab, find and select the record to edit. For more information about finding and selecting routing numbers, see Finding a routing number. Result: The selected record appears in Update mode on the Routing Number tab.
2	Edit the details as described in Adding a routing number.
3	Click Save and then Return to save your changes and return to the previous screen.

Deleting a routing number

Follow these steps to delete a routing number.

Note: You cannot delete routing numbers that are referenced elsewhere in the system, such as in DN Range records.

Step	Action
1	In Find mode, on the Routing Number tab, find and select the record to delete. For more information about finding and selecting routing numbers, see Finding a routing number.
2	Click Delete . Result: The Confirm Delete Record screen appears.
3	Click Yes to confirm. Result: The record is removed from the database.
4	Click Return to return to the previous screen.

Finding a routing number

Follow these steps to search the database for a specific routing number.

Step	Action
1	Ensure you are in Find mode on the Routing Number tab.
2	Enter the selection criteria in one or more query fields and click Find . If a field is left empty, the search retrieves all instances of that field. Result: This triggers an Oracle Like% query that returns the first 100 records that begin with the selection criteria. For example, if you enter 123 in a query field, the system returns records such as 123, 1234, 12345. The search results appear in a table on the Routing Number tab in Find result mode.

Step	Action
------	--------

Routing Number	Routing Destination	Description	Last User
DEAD	Entries scheduled for deletion	Entry treated as deleted at stated time	SMF
551	TEST1		SMF
552	TEST2		SMF
553	TEST3		SMF

Messages: Displaying page 1 of 1 pages: 4 records found that matched your query

Note: The first 100 records entered in the database are displayed in no particular order. If you do not find the record you are searching for, conduct a more specific search.

- 3 To view a record in Update mode, highlight the record line and click **Select**.
- 4 To delete a record, highlight the record line and click **Delete**.

PQYZ

Introduction

You use the **PQYZ** tab to map operator range prefixes to the operator names configured in routing destinations.

You can map one or more prefixes to the same routing destination. The routing destination must have been previously defined on the **Routing Destination** tab.

PQYZ tab

Here is an example **PQYZ** tab.

The screenshot shows a software window titled "NP/Subscriber and Network - Find mode". At the top, there are buttons for "Find", "New", "Save", "Delete", "Clear", and "Help". Below these are five tabs: "Routing Destination", "Routing Number", "PQYZ" (which is selected), "DN Range", and "Common Find Panel".

The "PQYZ" tab contains the following fields:

- PQYZ**: A text input field.
- Routing Destination**: A text input field with a browse button (three dots) to its right.
- Routing Number**: A text input field with a browse button (three dots) to its right.
- Number Type**: A dropdown menu currently showing "<Any>".
- URI**: A text input field.
- Description**: A text input field.

At the bottom of the form area, there is a section for "Last Change Data" containing:

- Last User**: A text input field.
- Last Date**: A text input field.
- Order By**: A dropdown menu currently showing "PQYZ".

At the very bottom of the window is a "Messages:" label.

Adding a PQYZ mapping

Follow these steps to Add a new PQYZ routing destination mapping.

Step	Action
1	On the PQYZ tab in the NP/Subscriber and Network - Find mode screen, click New . Result: You see the PQYZ tab in the NP/Subscriber and Network screen in New mode.

The screenshot shows the 'NP/Subscriber and Network - New mode' window. At the top, there are buttons: Find, New, Save, Delete, Clear, and Help. Below these are tabs: Routing Destination, Routing Number, PQYZ (which is selected and highlighted with a red box), DN Range, and Common Find Panel. The main form area contains the following fields and controls:

- PQYZ:** A text input field.
- Routing Destination:** A text input field with a search button (three dots) to its right.
- Routing Number:** A text input field with a search button (three dots) to its right.
- Number Type:** A dropdown menu currently set to 'Mobile'.
- URI:** A text input field.
- Description:** A text input field.

- 2 In the **PQYZ** field, enter the international called number prefix to map to a routing destination.
- 3 In the **Routing Destination** field, enter the routing destination for the PQYZ prefix. You must enter a valid routing destination (one that already exists in the database).
Note: If you do not know the routing destination, you can click the button to the right of this field to search for it using the Routing Destination Search Dialog. See *Using the Routing Destination Search Dialog* (on page 13) for details.
- 4 If required, click the button to the right of the **Routing Number** field to search for and select the routing number for the PQYZ prefix. See *Using the Routing Number Search Dialog* (on page 14) for details.
Note: You cannot enter in the routing number directly.
- 5 From the **Number Type** drop down list, select the number type for the PQYZ entry.
- 6 If required, enter a **URI** to associate with the PQYZ entry.
- 7 Click **Save**.
- 8 Repeat steps 2 to 7 for all the PQYZ routing destination mappings you require.
Note: When you click **Save**, the saved values remain on the screen. You can create another new record by typing over these values and clicking **Save** again.
- 9 Click **Return** to go back to the previous screen.

Editing a PQYZ mapping

Follow these steps to edit a PQYZ routing destination mapping.

Step	Action
1	In Find mode, on the PQYZ tab, find and select the record to edit. For more information about finding and selecting a PQYZ record, see <i>Finding a PQYZ mapping</i> (on page 27). Result: The selected record appears in Update mode on the PQYZ tab.
2	Edit the details as described in Adding a PQYZ mapping. Tip: To delete the routing number from the PQYZ mapping, you must first delete the current value for the routing destination field.
3	Click Save , and then Return , to save your changes and return to the previous screen.

Deleting a PQYZ mapping


Follow these steps to delete a PQYZ routing destination mapping.

Step	Action
1	In Find mode, on the PQYZ tab, find and select the record to delete. For more information about finding and selecting PQYZ records, see <i>Finding a PQYZ mapping</i> (on page 27).
2	Click Delete . Result: The Confirm Delete Record screen appears.
3	Click Yes to confirm. Result: The record is removed from the database.
4	Click Return to return to the previous screen.

Finding a PQYZ mapping

Follow these steps to search the database for a specific PQYZ record.

Step	Action
1	Ensure you are on the PQYZ tab in Find mode.
2	Enter the selection criteria in one or more query fields and click Find . If a field is left empty, the search retrieves all instances of that field. Result: This triggers an Oracle Like% query that returns the first 100 records that begin with the selection criteria. For example, if you enter 123 in a query field, the system returns records such as 123, 1234, 12345, ... The search results appear in the table on the PQYZ tab in Find result mode. Note: The first 100 records entered in the database are displayed in no particular order. If you do not find the record you are searching for, conduct a more specific search.

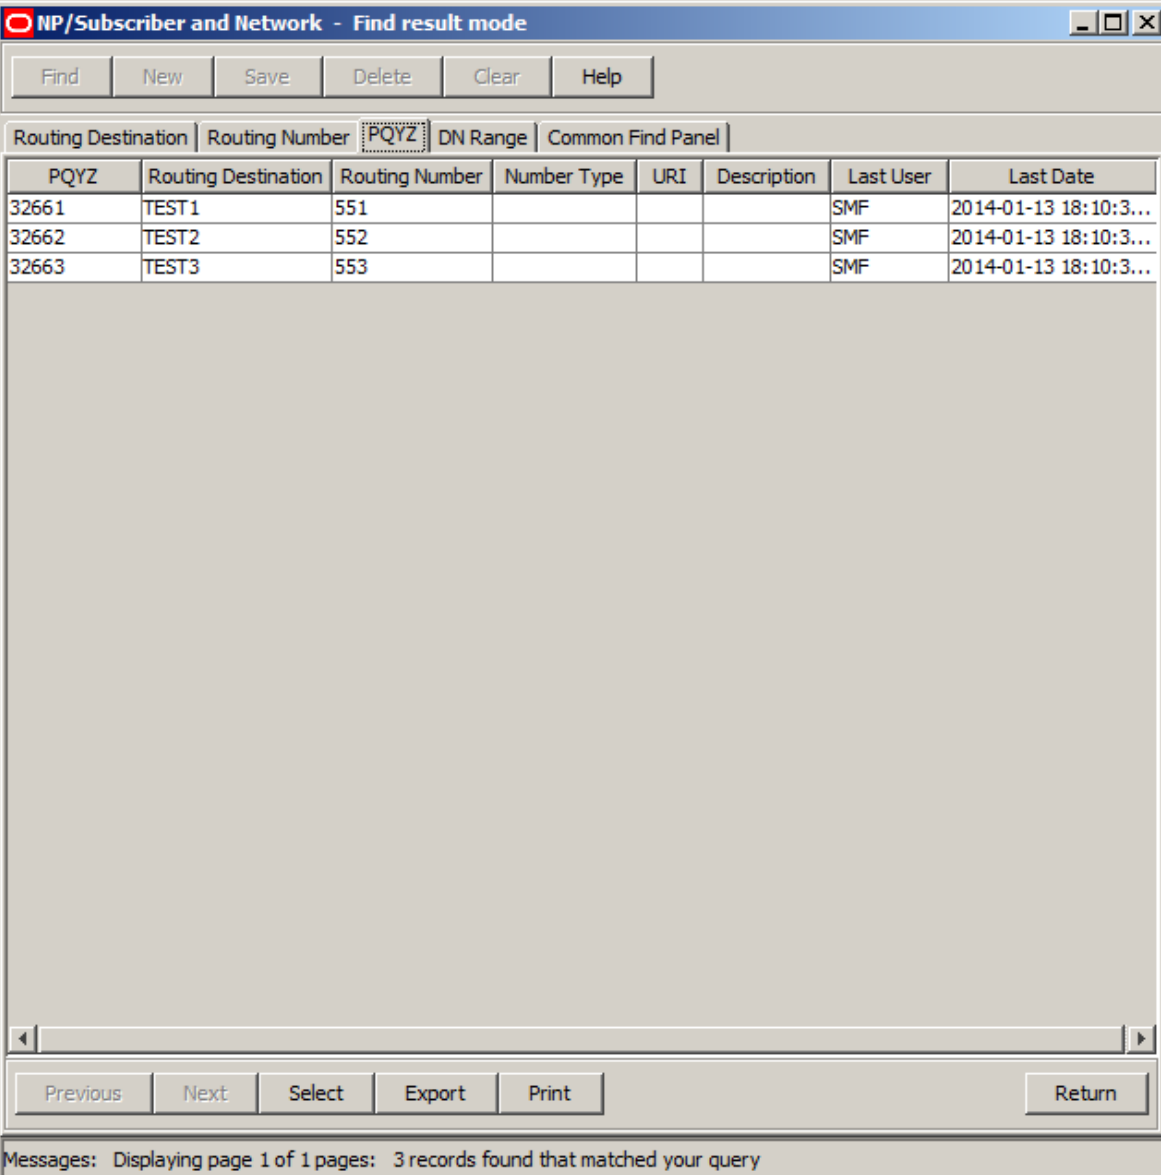Step	Action																																
 The screenshot shows a software window titled "NP/Subscriber and Network - Find result mode". It features a toolbar with buttons: Find, New, Save, Delete, Clear, and Help. Below the toolbar is a tabbed interface with four tabs: "Routing Destination", "Routing Number", "PQYZ" (which is selected and highlighted with a dotted border), and "DN Range". The "PQYZ" tab contains a table with the following data: <table border="1"> <thead> <tr> <th>PQYZ</th> <th>Routing Destination</th> <th>Routing Number</th> <th>Number Type</th> <th>URI</th> <th>Description</th> <th>Last User</th> <th>Last Date</th> </tr> </thead> <tbody> <tr> <td>32661</td> <td>TEST1</td> <td>551</td> <td></td> <td></td> <td></td> <td>SMF</td> <td>2014-01-13 18:10:3...</td> </tr> <tr> <td>32662</td> <td>TEST2</td> <td>552</td> <td></td> <td></td> <td></td> <td>SMF</td> <td>2014-01-13 18:10:3...</td> </tr> <tr> <td>32663</td> <td>TEST3</td> <td>553</td> <td></td> <td></td> <td></td> <td>SMF</td> <td>2014-01-13 18:10:3...</td> </tr> </tbody> </table> Below the table is a large empty rectangular area. At the bottom of the window is a navigation bar with buttons: Previous, Next, Select, Export, Print, and a Return button. A status bar at the very bottom displays the message: "Messages: Displaying page 1 of 1 pages: 3 records found that matched your query".		PQYZ	Routing Destination	Routing Number	Number Type	URI	Description	Last User	Last Date	32661	TEST1	551				SMF	2014-01-13 18:10:3...	32662	TEST2	552				SMF	2014-01-13 18:10:3...	32663	TEST3	553				SMF	2014-01-13 18:10:3...
PQYZ	Routing Destination	Routing Number	Number Type	URI	Description	Last User	Last Date																										
32661	TEST1	551				SMF	2014-01-13 18:10:3...																										
32662	TEST2	552				SMF	2014-01-13 18:10:3...																										
32663	TEST3	553				SMF	2014-01-13 18:10:3...																										

- 3 To view a record in Update mode, highlight the record line and click **Select**.
- 4 To delete a record, highlight the record line and click **Delete**.

DN Range

Introduction

You use the **DN Range** tab to represent an individual ported subscriber or range of ported subscribers (such as PBX users) by entering a DN number range and associating it to a specific routing number. This tab can also be used for stating operator ranges.

Rules

These rules apply to DN Ranges:

- 1 A DN Range can be either an operator type or a subscriber type
- 2 Additional Routing Numbers, Donor ID Numbers, and Port ID Numbers may only be defined for subscriber DN Ranges
- 3 The DN Start and DN End values must be of equal length
- 4 The DN End value must be greater than or equal to the DN Start value
- 5 The combination of DN Range and Activation Date must be unique and not overlap an existing DN Range, unless the DN Ranges are equal but there is a different Activation Date
- 6 The Routing Number and the Additional Routing Number must have been previously defined on the **Routing Number** tab
- 7 For a particular subscriber range only the most recent 10 activation date entries will be considered during runtime (enforced in service), therefore when provisioning you should not define more than 10 entries per subscriber range.

Note: Rule 7 is not enforced in the database.

Purging subscriber dn ranges

Periodically a purge facility will run on the database to delete any subscriber DN ranges which are no longer active. The following DN ranges will be deleted:

- 1 All entries associated with a unique subscriber (that is, entries for the same subscriber but with different activation dates) that are no longer active due to there being an active entry for the subscriber with a more recent activation date.
- 2 Subscriber entries that are currently active where:
 - The routing number has been set to DEAD
 - There are no entries for the subscriber with activation dates in the future

For more information on the purge facility, refer to the *Tools and Utilities* chapter in *Number Portability Service Pack Technical Guide*.

Note: The purge facility will not remove operator DN ranges.

DN Range tab

Here is an example DN Range tab.

The screenshot shows a software window titled "NP/Subscriber and Network - Find mode". At the top, there are buttons for "Find", "New", "Save", "Delete", "Clear", and "Help". Below these are tabs for "Routing Destination", "Routing Number", "PQYZ", "DN Range" (which is selected), and "Common Find Panel".

Inside the "DN Range" tab, there is a section "Entry Type (Tick for Operator)" with a checked checkbox. Below this are several input fields: "DN Start", "DN End", "Activation Date", "Routing Number" (with a search icon), "Additional Routing Number" (with a search icon), "Donor ID Number" (with a search icon), "Port ID Number", "Number Type" (a dropdown menu showing "<Any>"), and "URI".


At the bottom of the main area, there is a "Last Change Data" section with "Last User:" and "Last Date:" labels and corresponding input fields. Below that is an "Order By:" dropdown menu currently set to "DN Start".

A "Messages:" section is visible at the very bottom of the window.

Adding a DN range

Follow these steps to add a new DN range.

Step	Action
1	On the DN Range tab in the NP/Subscriber and Network - Find mode screen, click New . Result: You see the DN Range tab in the NP/Subscriber and Network screen in New mode.

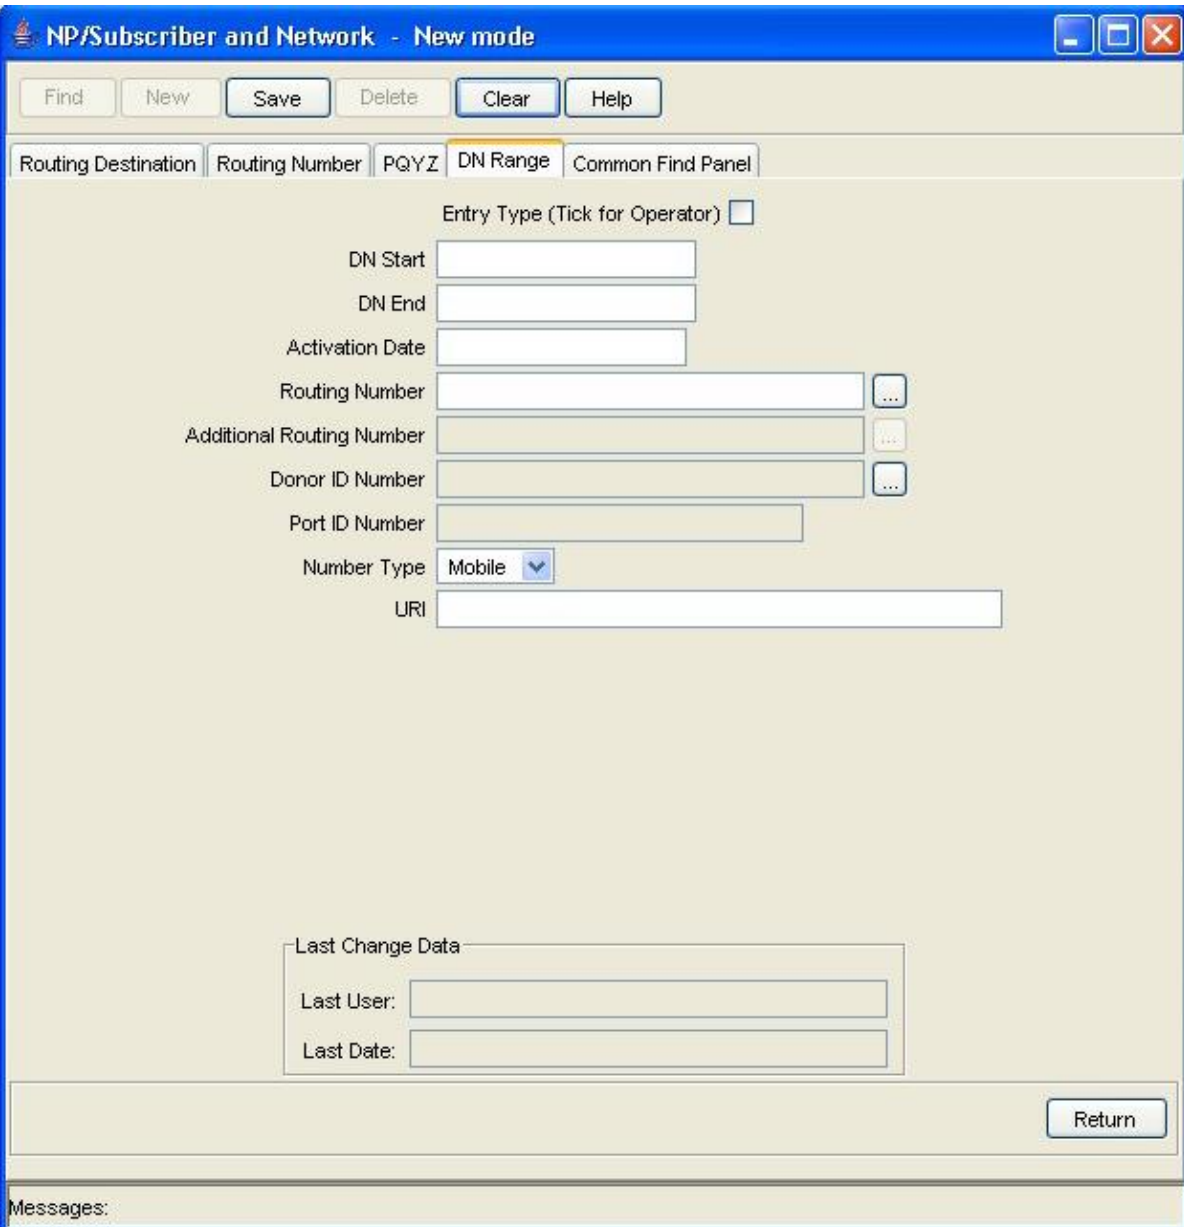Step	Action
 The screenshot shows a software window titled "NP/Subscriber and Network - New mode". It features a menu bar with "Find", "New", "Save", "Delete", "Clear", and "Help". Below the menu bar are tabs: "Routing Destination", "Routing Number", "PQYZ", "DN Range" (which is selected), and "Common Find Panel". The main area contains several input fields: "Entry Type (Tick for Operator)" with a checkbox, "DN Start", "DN End", "Activation Date", "Routing Number" (with a browse button "..."), "Additional Routing Number" (with a browse button "..."), "Donor ID Number" (with a browse button "..."), "Port ID Number", "Number Type" (a dropdown menu currently showing "Mobile"), and "URI". At the bottom, there is a "Last Change Data" section with "Last User:" and "Last Date:" fields, and a "Return" button.	

- 2 If this DN range provides additional routing for external operator ranges then select the **Entry Type (Tick for Operator)** check box. Leave deselected if this is a subscriber DN range.

Note: When this check box is selected you will not be able to specify an:

- Additional Routing Number
- Donor ID Number
- Port ID Number

- 3 In the **DN Start** field, enter the starting number for the DN range. The number must be between four and 18 digits long.

- 4 In the **DN End** field, enter the end number for the DN range. The number must be greater than or equal to the DN Start number and must be the same length.

Step	Action
5	In the Activation Date field, enter the activation date using this format: DD/MM/YYYY HH:MM:SS. Example: "01/15/2008 10:00:00"
6	In the Routing Number field, enter the routing number associated to the recipient network that the subscriber is being ported to. You must enter a routing number that has been previously defined in the database. Note: If you do not know the routing number, you can click the button to the right of this field to search for it using the Routing Number Search Dialog. See <i>Using the Routing Number Search Dialog</i> (on page 14) for details.
7	If required, in the Additional Routing Number field, specify the additional routing number the DN range maps to. This is the logical routing number for the network element that holds the subscriber information in the recipient network. Note: You cannot enter in an additional routing number directly. Click the button to the right of this field to search for it using the Additional Routing Number Search Dialog. See <i>Using the Additional Routing Number Search Dialog</i> (on page 34) for details.
8	If required, in the Donor ID Number field specify the donor ID number. Note: To search for a valid number using the Donor ID Search Dialog, click the button to the right of this field. See <i>Using the Donor ID Search Dialog</i> (on page 36) for details.
9	If required, in the Port ID Number field enter the number of the port ID for the DN range. Note: This field is used for auditing purposes (if available) to hold the administrative ID for the port request.
10	From the Number Type drop down list, select the number type for the DN range.
11	If required, enter a URI to associate with the DN Range.
12	Click Save . Note: If the DN range rules are broken, a "Save operation failed" error message detailing the problem will be displayed.
13	Repeat steps 2 to 12 to add all the DN ranges you require. Note: When you click Save , the saved values remain on the screen. You can create another new record by typing over these values and clicking Save again.
14	Click Return to go back to the previous screen.

Editing a dn range

Follow these steps to edit a DN range.

Step	Action
1	In Find mode, on the DN Range tab, find and select the record to edit. For more information about finding and selecting DN ranges, see <i>Finding a dn range</i> (on page 33). Result: The selected record appears in Update mode on the DN Range tab.
2	Edit the details as described in Adding a DN range. Tips:

Step	Action
	- To remove the additional routing number for a DN range, you must first remove the current value in the Routing Number field. This resets the additional routing number to blank. - To mark a DN range for purging, set the Routing Number field to 'DEAD'.
3	Click Save and then Return to save your changes and return to the previous screen.

Deleting a dn range

Follow these steps to delete a DN range.

Step	Action
1	In Find mode, on the DN Range tab, find and select the record to delete. For more information about finding and selecting DN ranges, see <i>Finding a dn range</i> (on page 33).
2	Click Delete . Result: The Confirm Delete Record screen appears.
3	Click Yes to confirm. Result: The record is removed from the database.
4	Click Return to return to the previous screen.

Finding a dn range

Follow these steps to search the database for a specific DN range.

Step	Action
1	Ensure you are on the DN Range tab in Find mode.
2	Enter selection criteria in one or more query fields and click Find . If a field is left empty, the search retrieves all instances of that field. Result: This triggers an Oracle Like% query that returns the first 100 records that begin with the selection criteria. For example, if you enter 123 in a query field, the system returns records such as 123, 1234, 12345, ... The results appear in the table on the DN Range tab in Find result mode.

Step	Action
1	Click the button to the right of the Additional Routing Number field. Result: You see the Additional Routing Number Search Dialog.

NP/Subscriber and Network - Find result mode

Find New Save Delete Clear Help

Routing Destination Routing Number PQYZ **DN Range** Common Find Panel

DN Start	DN End	Activation Date	Routing Number	Additional Routing Number
1300	1400	01/01/2008 10:00:00	951	
1600	1800	01/01/2008 10:00:00	952	
2000	2010	01/01/2008 10:00:00	953	

Previous Next Select Export Print Return

Messages: Displaying page 1 of 1 pages: 3 records found that matched your query

Note: The first 100 records entered in the database are displayed in no particular order. If you do not find the record you are searching for, conduct a more specific search.

- 3 To view a record in Update mode, highlight the record line and click **Select**.
- 4 To delete a record, highlight the record line and click **Delete**.


Using the Additional Routing Number Search Dialog

You can use the Additional Routing Number Search Dialog to find an additional routing number record on any tab that has a search button next to the **Additional Routing Number** field.


Note: The additional routing numbers listed in the search results will depend on the value previously specified in the **Routing Number** field.

Follow these steps to search for an additional Routing Number in the Additional Routing Number Search Dialog.

Step	Action
1	Click the button to the right of the Additional Routing Number field. Result: You see the Additional Routing Number Search Dialog.

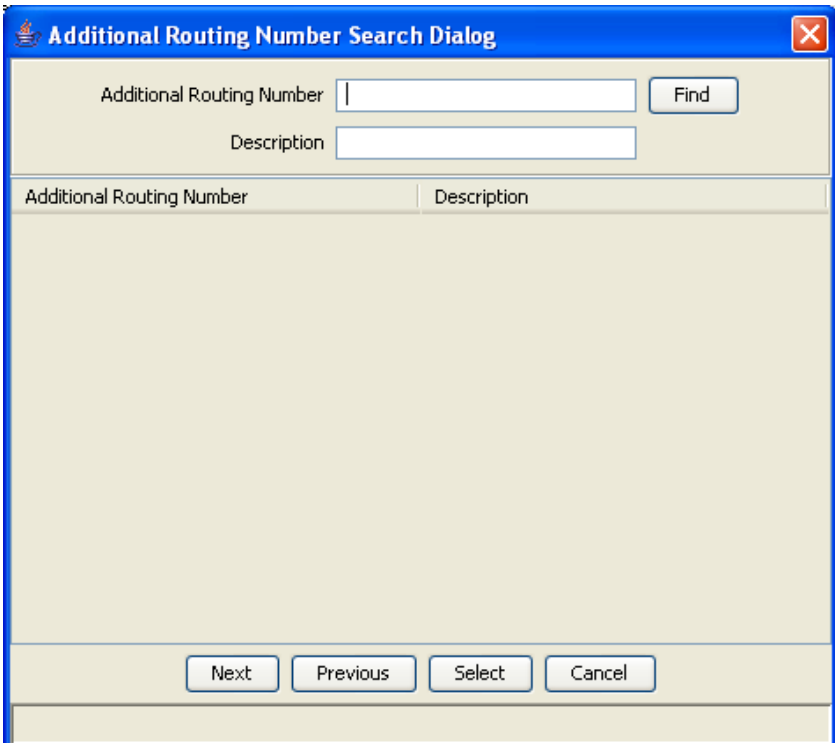Step	Action
	

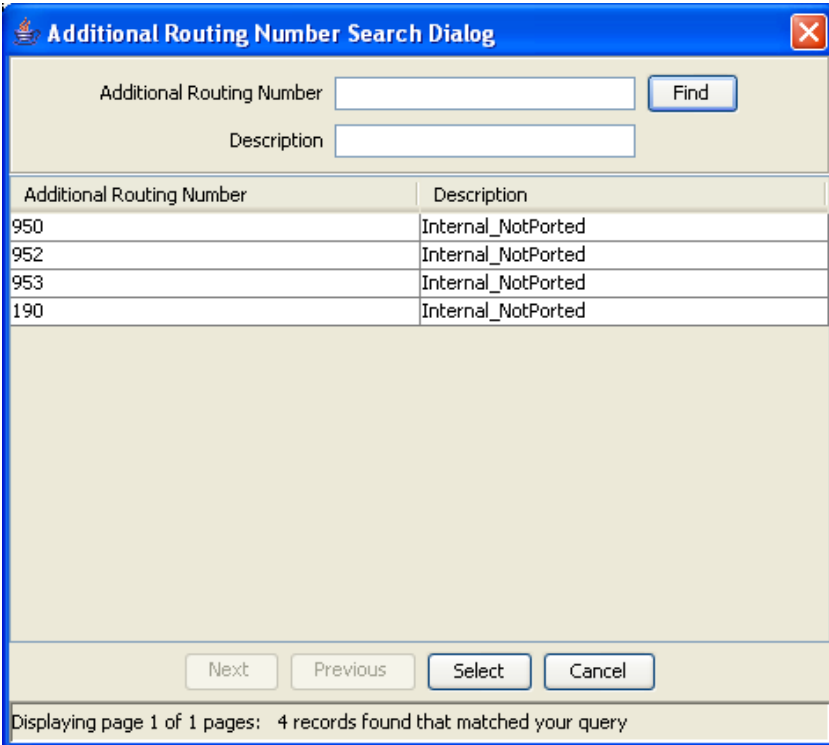- 2 Enter the search criteria in the query fields and click **Find**.
If the field is left empty, then the search retrieves all instances of that field.
Result: The search finds all the available additional routing numbers for the previously specified routing number and that match the search criteria. The results are displayed in the grid in the Additional Routing Number Search Dialog.

Step	Action										
	 Additional Routing Number Search Dialog Additional Routing Number Find Description <table border="1"> <thead> <tr> <th>Additional Routing Number</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>950</td> <td>Internal_NotPorted</td> </tr> <tr> <td>952</td> <td>Internal_NotPorted</td> </tr> <tr> <td>953</td> <td>Internal_NotPorted</td> </tr> <tr> <td>190</td> <td>Internal_NotPorted</td> </tr> </tbody> </table> Next Previous Select Cancel Displaying page 1 of 1 pages: 4 records found that matched your query	Additional Routing Number	Description	950	Internal_NotPorted	952	Internal_NotPorted	953	Internal_NotPorted	190	Internal_NotPorted
Additional Routing Number	Description										
950	Internal_NotPorted										
952	Internal_NotPorted										
953	Internal_NotPorted										
190	Internal_NotPorted										

- 3 To select an additional routing number, highlight it in the grid and click **Select**.

Result: Your selection is inserted into the **Additional Routing Number** field.

Using the Donor ID Search Dialog


You can use the Donor ID Search Dialog to find a donor id number record on any tab that has a search button next to the **Donor ID Number** field.

Follow these steps to search for a donor ID number in the Donor ID Search Dialog.

Step	Action
------	--------

- 1 Click the button to the right of the **Donor ID Number** field.

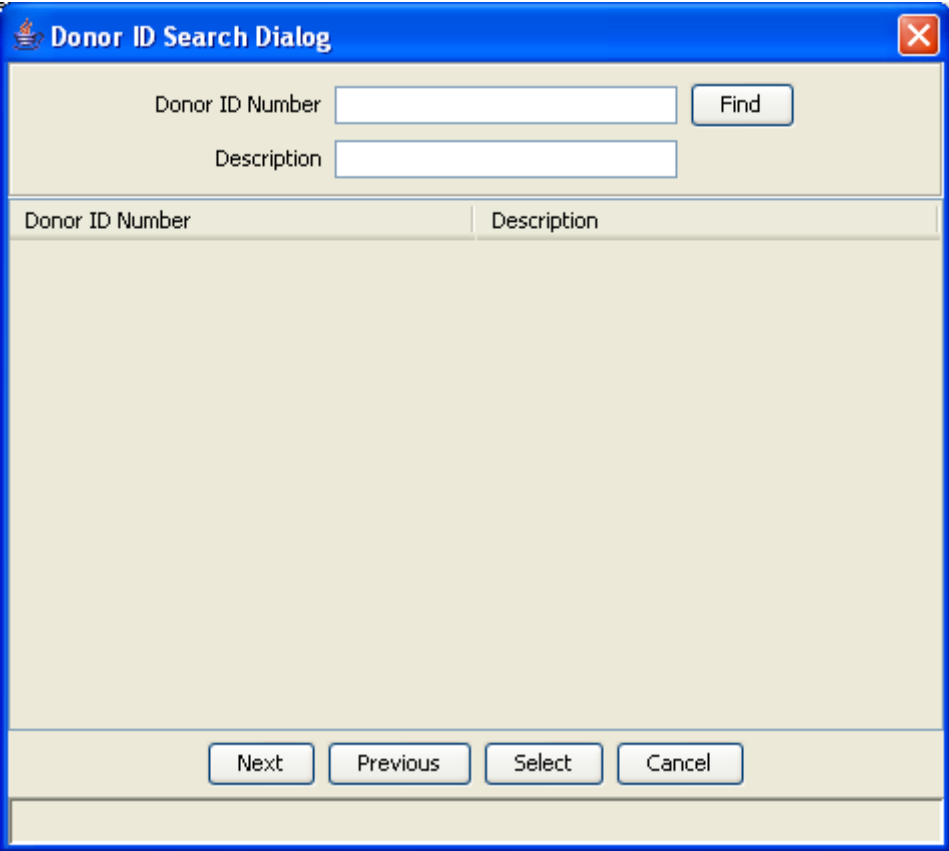Result: You see the Donor ID Search Dialog.




The screenshot shows a window titled "Donor ID Search Dialog". It contains two text input fields: "Donor ID Number" and "Description". To the right of the "Donor ID Number" field is a "Find" button. Below these fields is a table with two columns: "Donor ID Number" and "Description". The table is currently empty. At the bottom of the dialog are four buttons: "Next", "Previous", "Select", and "Cancel".

- 2 Enter the search criteria in the query fields and click **Find**.

If the field is left empty, then the search retrieves all instances of that field.

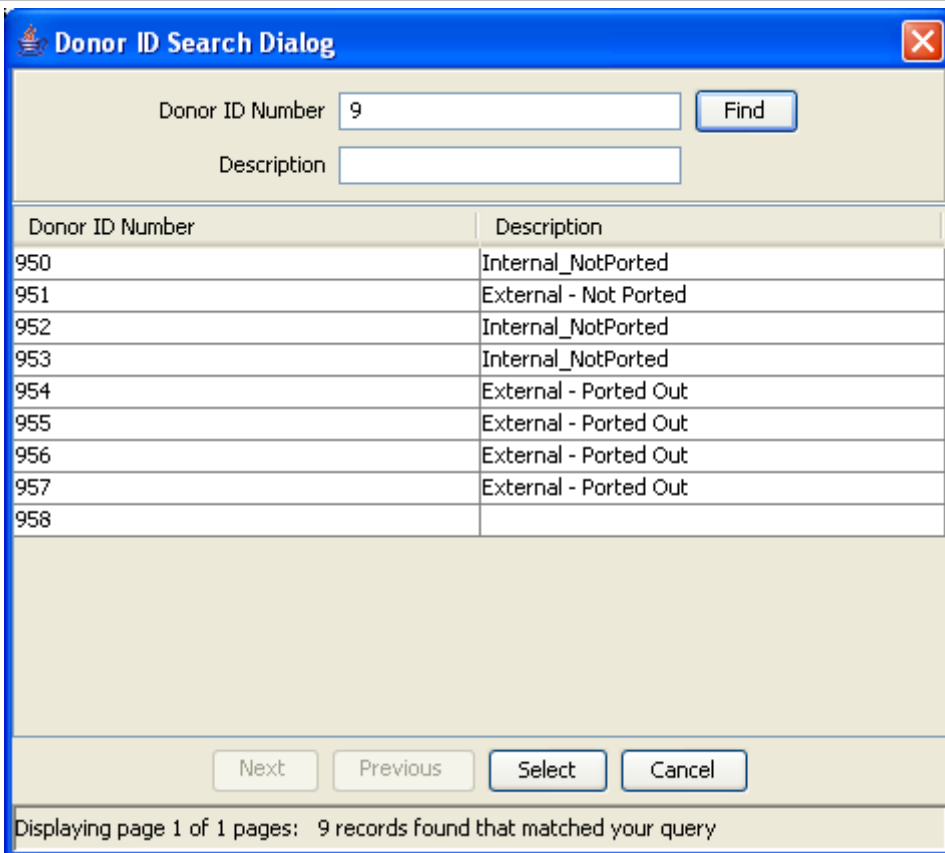Result: The search finds all the donor id numbers that match the search criteria and displays the results in the table in the Donor ID Search Dialog.

Step	Action																				
	 The screenshot shows a 'Donor ID Search Dialog' window. At the top, there's a title bar with a close button. Below it, there are two input fields: 'Donor ID Number' with the value '9' and 'Description' which is empty. A 'Find' button is to the right of the 'Donor ID Number' field. Below the input fields is a table with two columns: 'Donor ID Number' and 'Description'. The table contains 9 rows of data. At the bottom of the dialog, there are four buttons: 'Next', 'Previous', 'Select', and 'Cancel'. Below the buttons, a status bar reads 'Displaying page 1 of 1 pages: 9 records found that matched your query'. <table border="1"> <thead> <tr> <th>Donor ID Number</th> <th>Description</th> </tr> </thead> <tbody> <tr><td>950</td><td>Internal_NotPorted</td></tr> <tr><td>951</td><td>External - Not Ported</td></tr> <tr><td>952</td><td>Internal_NotPorted</td></tr> <tr><td>953</td><td>Internal_NotPorted</td></tr> <tr><td>954</td><td>External - Ported Out</td></tr> <tr><td>955</td><td>External - Ported Out</td></tr> <tr><td>956</td><td>External - Ported Out</td></tr> <tr><td>957</td><td>External - Ported Out</td></tr> <tr><td>958</td><td></td></tr> </tbody> </table>	Donor ID Number	Description	950	Internal_NotPorted	951	External - Not Ported	952	Internal_NotPorted	953	Internal_NotPorted	954	External - Ported Out	955	External - Ported Out	956	External - Ported Out	957	External - Ported Out	958	
Donor ID Number	Description																				
950	Internal_NotPorted																				
951	External - Not Ported																				
952	Internal_NotPorted																				
953	Internal_NotPorted																				
954	External - Ported Out																				
955	External - Ported Out																				
956	External - Ported Out																				
957	External - Ported Out																				
958																					

- 3 To select a donor ID number, highlight it in the table and click **Select**.

Result: Your selection is inserted into the **Donor ID Number** field.

Common Find Panel

Introduction

The **Common Find Panel** allows you to look for commonly required data from the following tables and view the results on the same screen:

- DN Range
- Routing Number
- PQYZ
- Routing Destination

Common Find Panel logic

The search is based on the prefix you enter in the **Find Number** field. If it:

- *Matches* at least one defined DN range with an Activation Date in the past, then the following data will be displayed:
 - Start and End of the matched DN range with the newest Activation Date
 - Activation Date of the matched DN range
 - Additional Routing Number, Donor ID Number, Port ID Number and Routing Number that is linked to the matched DN range

- Entry Type of the matched DN Range
 - Number Type of the matched DN Range
 - Routing Destination that is linked to this Routing Number
 - PQYZ information shall be displayed as “Not Applicable”
 - URI of the matched DN Range
 - *Does not match* any range in the conditions described above (because there is no range match or because the matched ranges have their Activation Date in the future), then the PQYZ is queried. If a match is found the following data will be displayed:
 - PQYZ of the matching PQYZ entry
 - Routing Destination that is linked to the matching PQYZ entry
 - DN range information shall be displayed as “Not found”
 - Activation Date information shall be displayed as “Not found”
 - Routing Number information shall be displayed as “Not applicable”
 - Number Type of the matching PQYZ entry
 - URI of the matching PQYZ entry
- In any other case all the information fields will be displayed as “Not found”

Common Find Panel tab

Here is an example **Common Find Panel** tab in the NP/Subscriber and Network screen.

Common Find Panel fields

This table describes the function of each field in the Common Find Panel.

Field	Description
Find Number	The number to look for in the PQYZ, DN Range, Routing Number and Routing Destination tables.
DN Start	Displays the start of the matched DN range with the newest activation date.
DN End	Displays the end of the matched DN range with the newest activation date.
Activation Date	Displays the activation date of the matched DN range.

Field	Description
Additional Routing Num	Displays the additional routing number of the matched DN range.
Donor ID Number	Displays the donor id of the matched DN range.
Port ID Number	Displays the port id of the matched DN range.
Entry Type (Tick for Operator)	Displays the entry type for the matched DN range. Valid values are: O - external operator range S - subscriber range
Number Type	Displays the number type for the matched DN range or PQYZ entry. Valid values are: • F - fixed • M - mobile • E - empty (not used)
URI (DN Range)	Displays the URI of the matched DN range.
Routing Number	Displays the Routing Number that is linked to the matched DN range and shows its description in the text box below.
PQYZ	Displays the PQYZ prefix that matches the Find Number value and shows its description in the text box below.
URI (PQYZ)	Displays the URI of the matching PQYZ entry.
Routing Destination	Displays the routing destination for the matching PQYZ prefix or Routing Number.

Using the Common Find Panel

Follow these steps to find and view data using a common number prefix.

Step	Action
1	Select the Common Find Panel in the NP/Subscriber and Network screen.
2	In the Find Number field, enter the number to search for, and click Find . Result: A list of the records that match the Find Number value displays.

Least Cost Routing

Overview

Introduction

This chapter explains how to define least cost routing rules and carriers.

In this chapter

This chapter contains the following topics.

Least Cost Routing Screen	43
Rule Set	45
Rule	48
Carrier	54

Least Cost Routing Screen

Introduction

The NP/Least Cost Routing screen allows you to define the carriers for least cost routing and the rules that determine which carrier will be used. The least cost routing functionality is optionally used after destination selection has been performed.

It contains the following tabs:


- Rule Set
- Rule
- Carrier

Accessing the Least Cost Routing screen


Follow these steps to access the Least Cost Routing screen.

Step	Action
1	Select Services from the SMS main screen.

- | Step | Action |
|------|---|
| 2 | <p>Select NP Service.</p> <p>Result: You see the list of NP Service menu options.</p> |

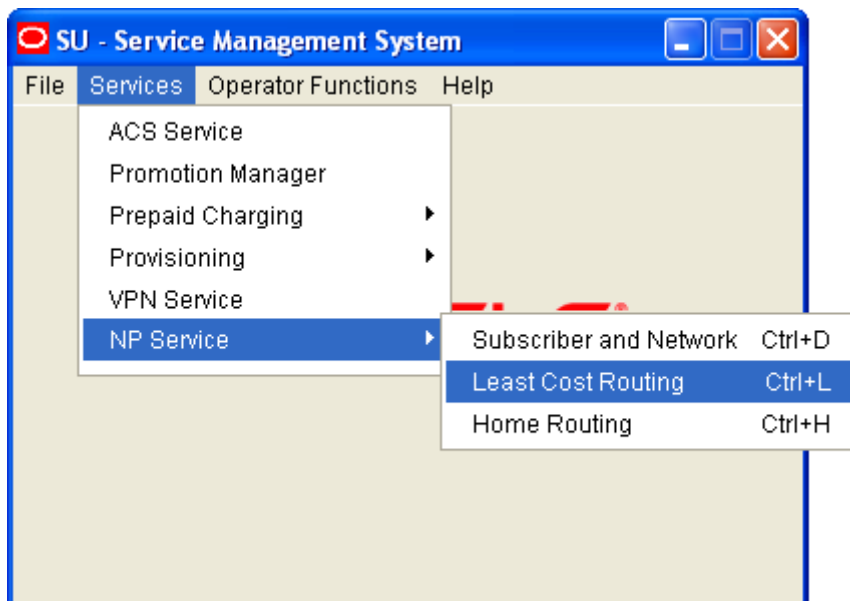

- | | |
|---|--|
| 3 | <p>Select Least Cost Routing.</p> <p>Result: You see the Rule Set tab in the NP/Least Cost Routing screen in Find mode.</p> |
|---|--|

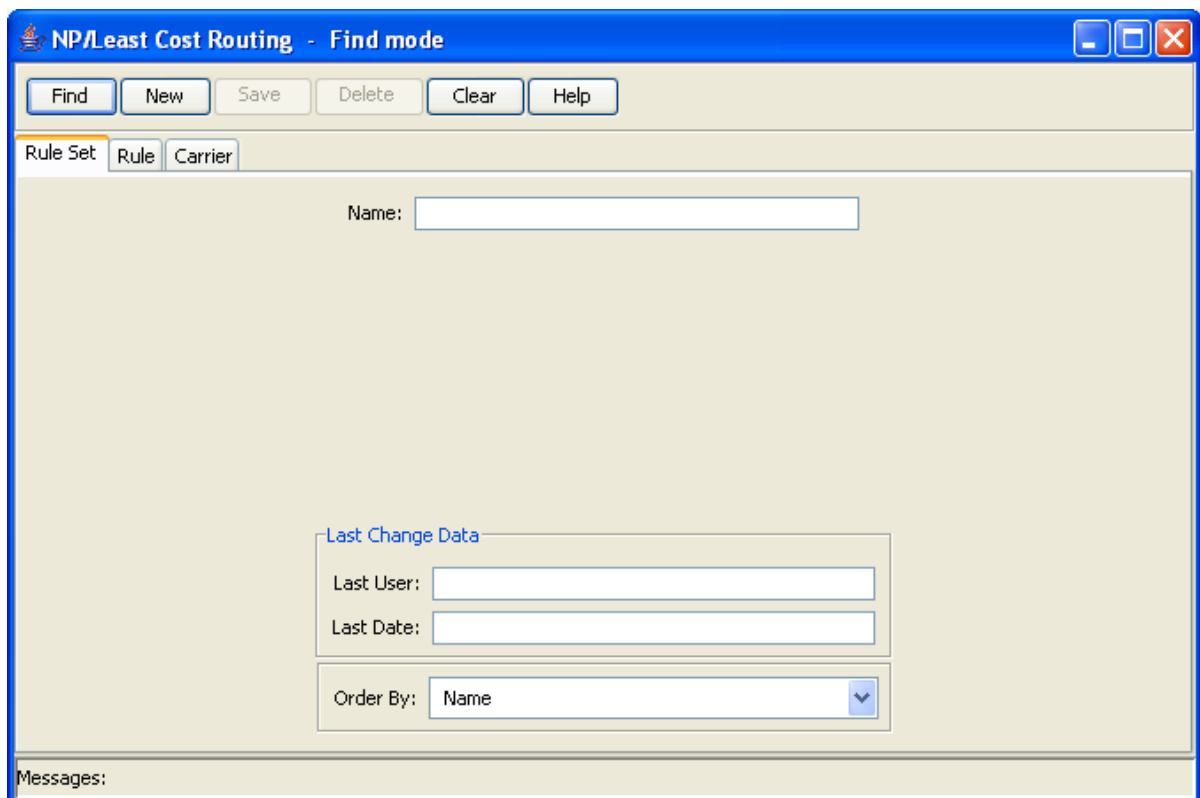

Rule Set

Introduction

You use the **Rule Set** tab to define the available rule sets for least cost routing.

Rule Set tab

Here is an example **Rule Set** tab in Find mode in the NP/Least Cost Routing screen.

Adding a rule set

Follow these steps to Add a new rule set.

Step	Action
1	Select the Rule Set tab in the NP/Least Cost Routing - Find mode screen, and click New . Result: You see the Rule Set tab in New mode.

Step	Action

- 2 In the **Name** field, enter a unique name for the new rule set. The rule set name can be up to 30 alphanumeric characters long and is required.
 - 3 Click **Save**.
 - 4 Repeat steps 2 to 3 for each rule set to add.
- Note:** When you click **Save**, the saved values remain on the screen. You can create another new record by typing over these values and clicking **Save** again.
- 5 Click **Return** to go back to the previous screen.

Editing a rule set

Follow these steps to edit a rule set.

Step	Action
1	In Find mode, on the Rule Set tab, find and select the record to edit. For more information about finding and selecting rule sets, see <i>Finding a rule set</i> (on page 47). Result: The selected record appears in Update mode on the Rule Set tab.
2	Edit the details as described in <i>Adding a rule set</i> (on page 45).
3	Click Save then Return to save your changes and return to the previous screen.

Deleting a rule set

Follow these steps to delete a rule set.

Note: You cannot delete rule sets that are referenced elsewhere in the system, such as in Rule records.

Step	Action
1	In Find mode, on the Rule Set tab, find and select the record to delete. For more information on finding and selecting rule sets, see <i>Finding a rule set</i> (on page 47).
2	Click Delete . Result: The Confirm Delete Record screen appears
3	Click Yes to confirm. Result: The record is removed from the database.
4	Click Return to return to the previous screen.

Finding a rule set

Follow these steps to search the database for a specific rule set.

Step	Action
1	Ensure you are in Find mode on the Rule Set tab.
2	Enter the selection criteria in one or more query fields and click Find . If a field is left empty, the search retrieves all instances of that field. Result: This triggers an Oracle Like% query that returns the first 100 records that begin with the selection criteria. For example, if you enter 123 in a query field, the system returns records such as 123, 1234, 12345. The results appear in the table on the Find result mode screen for the type of record you are querying. Note: The first 100 records entered in the database are displayed in no particular order. If you do not find the record you are searching for, conduct a more specific search.

Step	Action
------	--------

Name	Last User	Last Date
Rule Set 0	SU	21/05/2008 13:27:10
Rule Set 1	SU	21/05/2008 13:27:15
Rule Set 10	SU	21/05/2008 13:27:19
Rule Set 11	SU	21/05/2008 13:27:23
Rule Set 2	SU	21/05/2008 13:27:28
Rule Set 21	SU	21/05/2008 13:27:32
Rule Set 22	SU	21/05/2008 13:27:35
Test	SU	20/05/2008 13:48:41

Messages: Displaying page 1 of 1 pages: 8 records found that matched your query

- 3 To view a record in Update mode, highlight the record line and click **Select**.
- 4 To delete a record, highlight the record line and click **Delete**.

Rule

Introduction

You use the **Rule** tab to specify the rules associated with each rule set. You can specify more than one rule per rule set. Each rule consists of:

- Rule set itself
- List of carriers and the order in which they should be tried
- Routing destination

Rule tab

Here is an example **Rule** tab in Find mode in the NP/Least Cost Routing screen.


The screenshot shows a software window titled "NP/Least Cost Routing - Find mode". At the top, there is a toolbar with buttons: Find, New, Save, Delete, Clear, and Help. Below the toolbar are three tabs: Rule Set, Rule (which is selected and highlighted with a dotted border), and Carrier. The main area of the window contains several input fields and buttons. On the left, there is a "Rule Set" dropdown menu currently showing "<Any>". To its right is a "Routing Destination" text field followed by a button with three dots. Below these are eight "Carrier" fields, labeled "Carrier 1" through "Carrier 8", each followed by a button with three dots. At the bottom of the main area, there is a section titled "Last Change Data" containing "Last User:" and "Last Date:" text labels, each followed by an empty text field. Below this is an "Order By:" label followed by a dropdown menu currently showing "Rule Set". At the very bottom of the window is a "Messages:" label.

Using the Carrier Search Dialog

You can invoke the Carrier Search Dialog from the **Rule** tab in the Least Cost Routing screen in Find, New, or Update mode. You use it to find a carrier, when you do not know the carrier name.

Follow these steps to search for a carrier in the Carrier Search Dialog.

Step	Action
1	On the Rule tab, click the button to the right of the relevant Carrier field. Result: You see the Carrier Search Dialog.

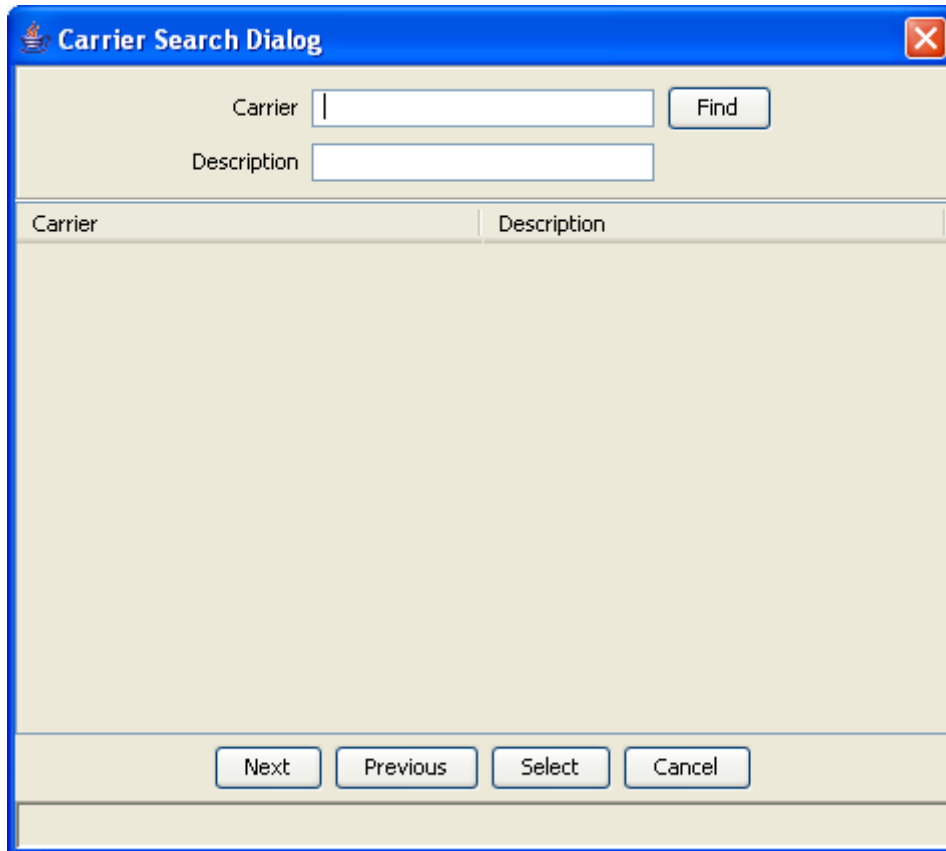

The image shows a 'Carrier Search Dialog' window. It has a blue title bar with a close button (X) in the top right corner. Below the title bar, there are two input fields: 'Carrier' and 'Description'. To the right of the 'Carrier' field is a 'Find' button. Below these fields is a large table area with two columns: 'Carrier' and 'Description'. At the bottom of the dialog, there are four buttons: 'Next', 'Previous', 'Select', and 'Cancel'.

- Enter the search criteria in the **Carrier** and **Description** query fields and click **Find**.
If a field is left empty, then the search retrieves all instances of that field.
Result: The search finds all the carriers that match the search criteria and displays them in a table in the Carrier Search Dialog.

Step	Action
------	--------

 **Carrier Search Dialog** 

Carrier

Find

Description

Carrier	Description
C1	
Carrier 1	National carrier 1
Carrier 2	National carrier 2

Next

Previous

Select

Cancel

Displaying page 1 of 1 pages: 3 records found that matched your query

- 3
- To select the carrier you want, highlight it in the table and click **Select**.
Result: You are returned to the **Rule** tab and the selected carrier name is inserted into relevant Carrier field.

Adding a rule

Follow these steps to Add a new rule to a rule set.

Step	Action
------	--------

- 1
- Select the **Rule** tab in the NP/Destination Selection - Find mode screen, and click **New**.
Result: You see the **Rule** tab in New mode.

Step	Action

- 2 In the **Rule Set** field, select the rule set to assign the rule to.
- 3 In the **Routing Destination** field, enter the routing destination for the rule. You must enter a valid routing destination (one that already exists in the database).

Note: If you do not know the routing destination, you can click the button to the right of this field to search for it using the Routing Destination Search Dialog. See *Using the Routing Destination Search Dialog* (on page 13) for details.

- 4 In the **Carrier 1** field, enter the first carrier to try when the rule is invoked. This is a required field.

Note: You must enter a valid carrier (one that already exists in the database). To search for a carrier, click the button to the right of the Carrier field. See *Using the Carrier Search Dialog* (on page 49) for details.

- 5 In the other **Carrier** fields, enter the carriers to try, in the sequence in which they should be tried, if the first carrier is unavailable.

Note: You must supply at least one carrier.

- 6 Click **Save**.

- 7 Repeat steps 2 to 6 for each rule to add.

Note: When you click **Save**, the saved values remain on the screen. You can create another new record by typing over these values and clicking **Save** again.

- 8 Click **Return** to go back to the previous screen.

Editing a rule

Follow these steps to edit a rule.

Step	Action
1	In Find mode, on the Rule tab, find and select the record to edit. For more information on finding and selecting rule records, see <i>Finding a rule</i> (on page 53). Result: The selected record appears in Update mode on the Rule tab.
2	Edit the details as described in <i>Adding a rule</i> (on page 51).
3	Click Save , then Return , to save your changes and return to the previous screen.

Deleting a rule

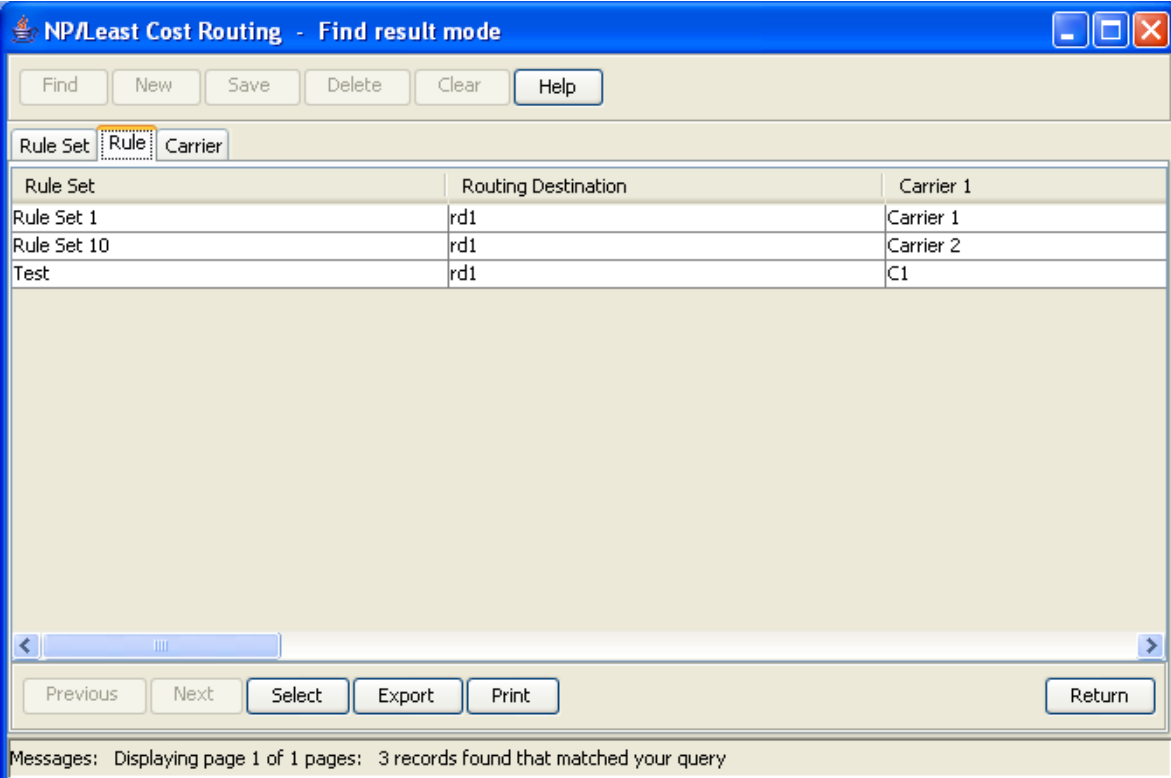
Follow these steps to delete a rule.

Step	Action
1	In Find mode, on the Rule tab, find and select the record to delete. For more information on finding and selecting rule records, see <i>Finding a rule</i> (on page 53).
2	Click Delete . Result: The Confirm Delete Record screen appears.
3	Click Yes to confirm. Result: The record is removed from the database.
4	Click Return to return to the previous screen.

Finding a rule

Follow these steps to search the database for a specific rule.

Step	Action
1	Ensure you are in Find mode on the Rule tab.
2	Enter the selection criteria in one or more query fields and click Find . If a field is left empty, then the search will retrieve all instances of that field. Result: This triggers an Oracle Like% query that returns the first 100 records that begin with the selection criteria. For example, if you enter 123 in a query field, the system will return records such as 123, 1234, 12345, ... The results appear in the table on the Rule tab in Find result mode. Note: These are the first 100 records entered in the database, and they display in no particular order. If you do not find the record you are searching for, you need to conduct a more specific search.

Step	Action
 The screenshot shows a software window titled "NP/Least Cost Routing - Find result mode". It has a menu bar with "Find", "New", "Save", "Delete", "Clear", and "Help". Below the menu bar are three tabs: "Rule Set", "Rule", and "Carrier". The "Rule" tab is currently selected. The main area contains a table with three columns: "Rule Set", "Routing Destination", and "Carrier". The table has three rows: "Rule Set 1" with "rd1" and "Carrier 1", "Rule Set 10" with "rd1" and "Carrier 2", and "Test" with "rd1" and "C1". Below the table is a large empty area. At the bottom of the window are buttons for "Previous", "Next", "Select", "Export", "Print", and "Return". A status bar at the very bottom says "Messages: Displaying page 1 of 1 pages: 3 records found that matched your query".	

3 To view a record in Update mode, highlight the record line and click **Select**.

4 To delete a record, highlight the record line and click **Delete**.

Carrier

Introduction

The **Carrier** tab allows you to define the carriers for least cost routing rules.

Carrier tab

Here is an example **Carrier** tab in Find mode in the NP/Least Cost Routing screen.

The screenshot shows a software window titled "NP/Least Cost Routing - Find mode". At the top, there are buttons for "Find", "New", "Save", "Delete", "Clear", and "Help". Below these are three tabs: "Rule Set", "Rule", and "Carrier", with "Carrier" being the active tab. The main area contains several input fields and checkboxes:

- Name:** A text input field.
- Carrier Code:** A text input field.
- Format:** A dropdown menu currently showing "<Any>".
- Country Code:** A text input field.
- Override Noa:** A text input field.
- CLD PTY Prefix:** A text input field.
- Description:** A text input field.
- Send Routing Number:** A checked checkbox.
- Statistics ID:** A dropdown menu currently showing "<Any>".
- Application ID:** A dropdown menu currently showing "<Any>".

Below these fields is a section titled "Last Change Data" containing:


- Last User:** A text input field.
- Last Date:** A text input field.
- Order By:** A dropdown menu currently showing "Name".

At the bottom left of the window, there is a "Messages:" label.

Adding a carrier

Follow these steps to add a new carrier.

Step	Action
1	Select the Carrier tab in the NP/Least Cost Routing - Find mode screen, and click New . Result: You see the Carrier tab in New mode.

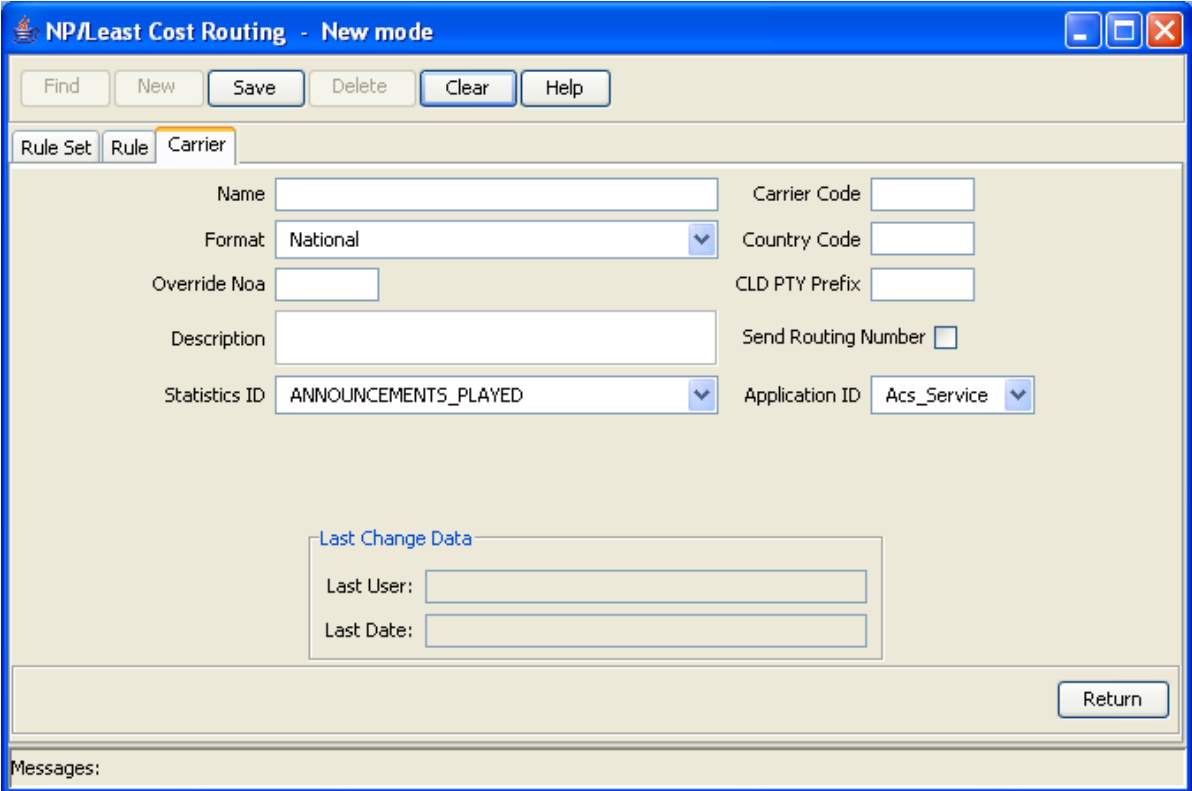Step	Action
 The screenshot shows a software window titled "NP/Least Cost Routing - New mode". It has a menu bar with "Find", "New", "Save", "Delete", "Clear", and "Help". Below the menu bar are three tabs: "Rule Set", "Rule", and "Carrier", with "Carrier" selected. The main area contains several input fields: "Name" (text box), "Carrier Code" (text box), "Format" (dropdown menu showing "National"), "Country Code" (text box), "Override Noa" (text box), "CLD PTY Prefix" (text box), "Description" (text box), "Send Routing Number" (checkbox), "Statistics ID" (dropdown menu showing "ANNOUNCEMENTS_PLAYED"), and "Application ID" (dropdown menu showing "Acs_Service"). At the bottom, there is a "Return" button and a "Messages:" section.	

- 2 In the **Name** field, enter a unique name for the new carrier. The carrier name can be up to 30 alphanumeric characters long and is required.
 - 3 In the **Format** field select the preferred format for the carrier.
 - 4 In the **Override Noa** field, enter the appropriate value. Valid values are a single digit in the range 0 through 7.
 - 5 In the **Description** field, enter a description for the carrier, if required. The description can be up to 64 alphanumeric characters long.
In the **Statistics ID** field, select the relevant statistic.
 - 4 In the **Carrier Code** field, enter the carrier code. The carrier code must be four characters long and is required.
 - 5 In the **Country Code** field, enter the country code for the carrier. The country code can be up to four decimal digits long and is required.
 - 6 In the **CLD PTY Prefix** field, enter the CLD PTY prefix if required. The CLD PTY prefix can be up to four hexadecimal digits long.
 - 7 Select the **Send Routing Number** check box to send the routing number when using this carrier.
 - 8 In the **Application ID** field, select the ID of the application used by the carrier.
 - 9 Click **Save**.
 - 10 Repeat steps 2 through 9 for each carrier to add.
- Note:** When you click **Save**, the saved values remain on the screen. You can create another new record by typing over these values and clicking **Save** again.
- 11 Click **Return** to go back to the previous screen.

Editing a carrier

Follow these steps to edit carrier details.

Step	Action
1	In Find mode, on the Carrier tab, find and select the record to edit. For more information on finding and selecting Carriers, see <i>Finding a carrier</i> (on page 57). Result: The selected record appears in Update mode on the Carrier tab.
2	Edit the details as described in <i>Adding a carrier</i> (on page 55).
3	Click Save , and then Return , to save your changes and return to the previous screen.

Deleting a carrier

Follow these steps to delete a Carrier.

Note: You cannot delete carriers that are referenced elsewhere in the system, such as in Rule records.

Step	Action
1	In Find mode, on the Carrier tab, find and select the record to delete. For more information on finding and selecting Carriers, see <i>Finding a carrier</i> (on page 57).
2	Click Delete . Result: The Confirm Delete Record screen appears.
3	Click Yes to confirm. Result: The record is removed from the database.
4	Click Return to return to the previous screen.

Finding a carrier

Follow these steps to search the database for a specific carrier.

Step	Action
1	Ensure you are on the Carrier tab in Find mode.
2	Enter the selection criteria in one or more query fields and click Find . If a field is left empty, then the search will retrieve all instances of that field. Result: This triggers an Oracle Like% query that returns the first 100 records that begin with the selection criteria. For example, if you enter 123 in a query field, the system will return records such as 123, 1234, 12345, ... The results appear in the table on Carrier tab in Find result mode. Note: These are the first 100 records entered in the database, and they display in no particular order. If you do not find the record you are searching for, you need to conduct a more specific search.

Step	Action												
NP/Least Cost Routing - Find result mode Find New Save Delete Clear Help Rule Set Rule Carrier <table><thead><tr><th>Name</th><th>Description</th><th>Carrier Code</th></tr></thead><tbody><tr><td>C1</td><td></td><td>0123</td></tr><tr><td>Carrier 1</td><td>National carrier 1</td><td>CC01</td></tr><tr><td>Carrier 2</td><td>National carrier 2</td><td>CC02</td></tr></tbody></table> < > Previous Next Select Export Print Return Messages: Displaying page 1 of 1 pages: 3 records found that matched your query		Name	Description	Carrier Code	C1		0123	Carrier 1	National carrier 1	CC01	Carrier 2	National carrier 2	CC02
Name	Description	Carrier Code											
C1		0123											
Carrier 1	National carrier 1	CC01											
Carrier 2	National carrier 2	CC02											

- 3 To view a record in Update mode, highlight the record line and click **Select**.
- 4 To delete a record, highlight the record line and click **Delete**.

Home Routing

Overview

Introduction

This chapter explains how to define home routing destinations.

In this chapter

This chapter contains the following topics.

Home Routing Screen	59
Home Routing.....	61
Home Routing Search	64

Home Routing Screen

Introduction

The NP/Home Routing screen allows you to define the range of called numbers and routing destinations for calls within the network. It also allows you to search for home routing. It contains the following tabs:


- Home Routing
- Home Routing Search

Accessing the Home Routing screen


Follow these steps to access the Home Routing screen.

Step	Action
1	Select Services from the SMS main screen.

- | Step | Action |
|------|---|
| 2 | <p>Select NP Service.</p> <p>Result: You see the list of NP Service menu options.</p> |

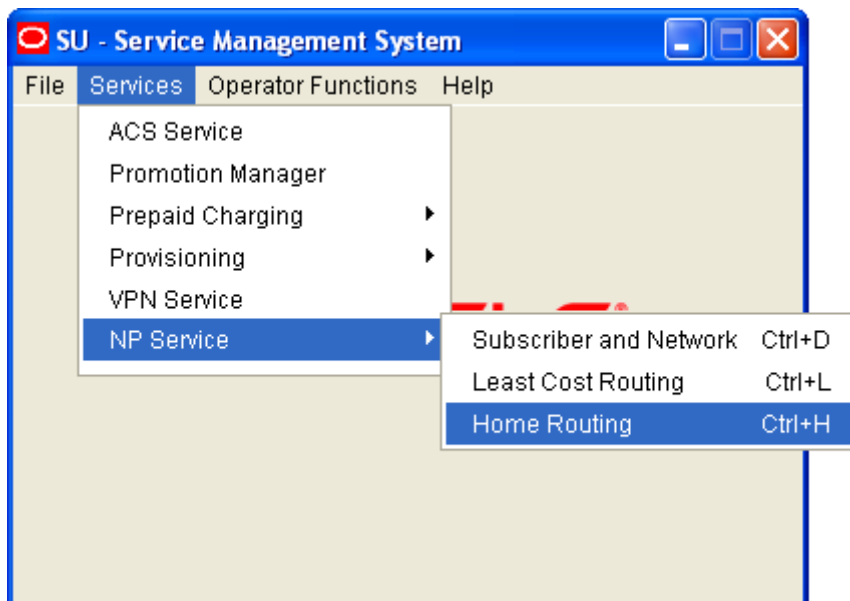

- | | |
|---|--|
| 3 | <p>Select Home Routing.</p> <p>Result: You see the Home Routing tab on the NP/Home Routing screen in Find mode.</p> |
|---|--|

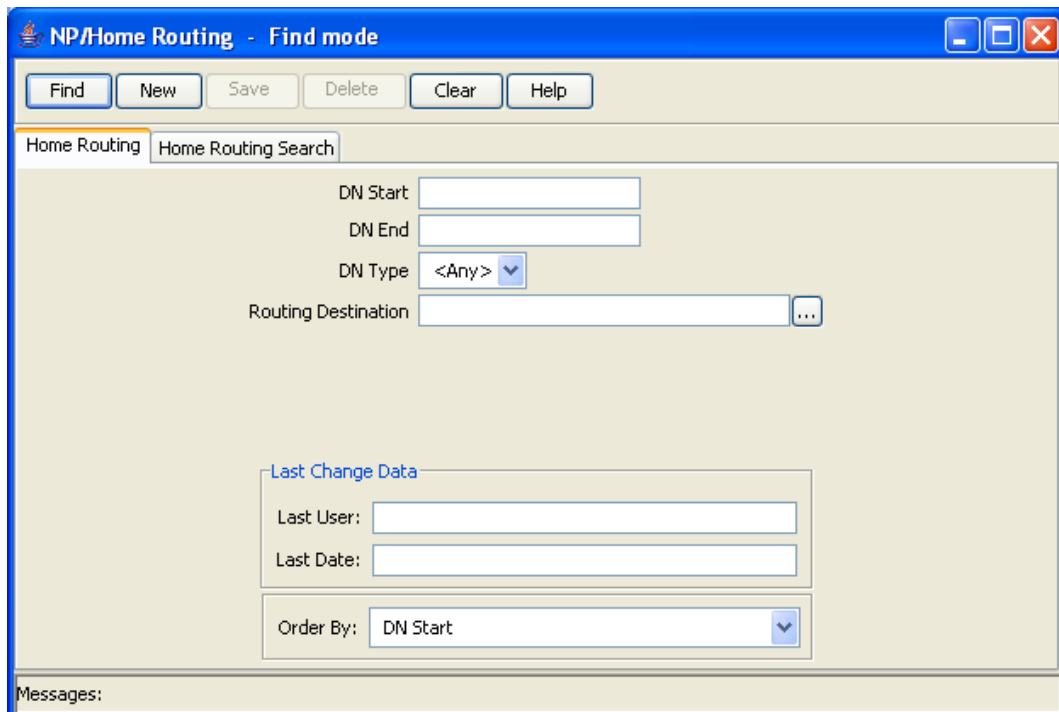

Home Routing

Introduction

You use the **Home Routing** tab to define the range of called numbers and routing destinations for calls within your network.

Home Routing tab

Here is an example **Home Routing** tab in Find mode in the NP/Home Routing screen.

NP/Home Routing - Find mode

Find New Save Delete Clear Help

Home Routing Home Routing Search

DN Start

DN End

DN Type <Any> ▼

Routing Destination ...

Last Change Data

Last User:

Last Date:

Order By: DN Start ▼

Messages:

Adding a home routing

Follow these steps to Add a new home routing definition.

Note: When specifying the DN Start and DN End fields, you must enter a range that does not overlap an existing DN range.

Step	Action
1	Select the Home Routing tab in the NP/Home Routing - Find mode screen, and click New . Result: You see the Home Routing tab in New mode.

- 2 In the **DN Start** field enter the start number for the DN range. The DN Start number must be between four and 18 digits long, and is required.
- 3 In the **DN End** field enter the end number for the DN range. The DN End number must be greater than the DN Start number, and the same length. It is a required field.
- 4 In the **DN Type** field, select one of the following:
 - HOME - for destinations within your network
 - SPECIAL - for called numbers outside the network with special status
- 5 In the **Routing Destination** field, enter the routing destination. It is a required field.

Note: If you do not know the routing destination, click the button to the right of this field to search for it using the Routing Destination Search Dialog. See *Using the Routing Destination Search Dialog* (on page 13) for details.
- 6 Click **Save**.
- 7 Repeat steps 2 through 6 for each home routing to add.

Note: When you click **Save**, the saved values remain on the screen. You can create another new record by typing over these values and clicking **Save** again.
- 8 Click **Return** to go back to the previous screen.

Editing a home routing

Follow these steps to edit a home routing definition.

Step	Action
1	In Find mode, on the Home Routing tab, find and select the record to edit. For more information on finding and selecting home routing records, see <i>Finding a home routing record</i> (on page 63). Result: The selected record appears in Update mode on the Home Routing tab.
2	Edit the details as described in <i>Adding a home routing</i> (on page 61).
3	Click Save , and then Return , to save your changes and return to the previous screen.

Deleting a home routing

Follow these steps to delete a home routing.

Step	Action
1	In Find mode, on the Home Routing tab, find and select the record to delete. For more information on finding and selecting home routing records, see <i>Finding a home routing record</i> (on page 63).
2	Click Delete . Result: The Confirm Delete Record screen appears.
3	Click Yes to confirm. Result: The record is removed from the database.
4	Click Return to return to the previous screen.

Finding a home routing record

Follow these steps to search the database for a specific home routing record.

Step	Action
1	Ensure you are in Find mode on the Home Routing tab.
2	Enter the selection criteria in one or more query fields and click Find . If a field is left empty, the search retrieves all instances of that field. Result: This triggers an Oracle Like% query that returns the first 100 records that begin with the selection criteria. For example, if you enter 123 in a query field, the system returns records such as 123, 1234, 12345, ... The results appear in the table on Home Routing tab in Find result mode.

Step	Action
------	--------

DN Start	DN End	DN Type
0001	0010	Home
0015	0025	Home

Messages: Displaying page 1 of 1 pages: 2 records found that matched your query

Note: The first 100 records entered in the database are displayed in no particular order. If you do not find the record you are searching for, conduct a more specific search.

- 2 To view a record in Update mode, highlight the record line and click **Select**.
Result: You see the record details on the tab for the selected record type, in Update mode.
- 3 To delete a record, highlight the record line and click **Delete**.

Home Routing Search

Introduction

You use the **Home Routing Search** tab to find the home routing details for a specified number.

Home Routing Search tab

Here is an example **Home Routing Search** tab in the NP/Home Routing screen.

Finding home routing details

Follow these steps to find the home routing details for a specified number.

Step	Action
1	Select the Home Routing Search tab in the NP/Home Routing screen.
2	In the Find Number field, enter the number for which to find home routing details and click Find . Result: If home routing has been defined for a DN range that includes the specified find number, the details are displayed in the screen. Otherwise, <code>No match found</code> is displayed.