

Oracle Financial Services Inline Processing Engine

Configuration Guide

Release 8.0.6.0.0



DOCUMENT CONTROL

Version Number	Revision Date	Changes Done
1.0	Created: July 2018	Added 8.0.6.0.0 Minor Release installation procedure and configuration details.
1.1	Updated: September 2018	Updated for OFSAAAI-16488 for instructions on posting JSON request for REST services.
1.2	Updated: November 2018	Updated for Doc 28952819.
1.3	Updated: January 2019	Updated for Doc 29243430.
1.4	Updated: April 2019	Updated for Doc 29531527.
Created by: Brijesh	Reviewed by: Swetha/Abhishek	Approved by: Swetha/Arup/Virupaksha

Executive Summary

This document includes the necessary instructions to apply 8.0.6.0.0 Minor Release for OFS Advanced Analytical Applications Infrastructure Application Pack and perform the required post install configurations. You can find the latest copy of this document in the [OHC Documentation Library](#).

TABLE OF CONTENTS

PREFACE	9
Summary	9
Audience	9
Prerequisites for the Audience	9
Related Documents	9
Conventions and Acronyms	10
Acronyms	10
1 ABOUT OFSAAI IPE	11
1.1 About OFSAA	11
1.2 About IPE	11
2 CONFIGURING IPE	12
2.1 Prerequisites	12
3 CONFIGURING IPE IN WEB APPLICATION SERVERS FOR REAL TIME MODE	13
3.1 Configuring IPE in WebLogic	13
3.1.1 Login to WebLogic Administrative Console	13
3.1.2 Configuring JMS Servers	13
3.1.3 Configuring JMS Modules	16
3.1.4 Creating Subdeployments	18
3.1.5 Creating JMS Connection Factory	20
3.1.6 Creating JMS Topic	23
3.1.7 Creating JMS Queues	27
3.1.8 Restart Weblogic Domain	31
3.2 Configuring IPE in WebSphere	31
3.2.1 Login to WebSphere	31
3.2.2 Bus Creation	32
3.2.3 Bus Member Creation	33
3.2.4 Configuring JMS Providers	36
3.2.5 Configuring JMS Connection Factory	37
3.2.6 Configuring JMS Queues	40
3.2.7 Configuring JMS Topics	46
3.2.8 RMI/IIOP Authentication Settings	50
3.2.9 Restart WebSphere Profile	51

3.3	Configuring IPE in Tomcat	51
3.3.1	Prerequisites	52
3.3.2	Configuring Tomcat.....	52
3.4	Configuring IPE in Kafka	54
3.4.1	Prerequisites	54
3.4.2	Configuring Kafka.....	54
3.4.3	Testing Kafka Configuration	57
4	POST DATA IN JSON FORMAT TO IPE	59
4.1	Prerequisites	59
4.2	Posting JSON request for REST services.....	59
5	ADDITIONAL CONFIGURATION	61
5.1	Updating Install Properties	61
5.1.1	Updating install.properties to enable Highlights in Real-Time	61
5.1.2	IPE Caching.....	62
5.2	Creating ILP.ear/ ILP.war	63
5.3	Deploying ILP.ear in Weblogic	64
5.3.1	Installing ILP.ear in WebLogic using WebLogic Administrator Console	64
5.3.2	Deploying ILP.ear in WebSphere	67
5.4	Logging	73
6	HIVE CONFIGURATIONS	75
6.1	Loading UDF file in HIVE	75
6.2	Creating Result Tables.....	75
APPENDIX A.....		77
	Inline Processing URL of JMS	77
APPENDIX B.....		78
	Check ports in WebSphere.....	78
APPENDIX C.....		80
	Checking Target Inbound transport chain and Provider endpoints values.....	80

LIST OF FIGURES

Figure 1: Summary of JMS Server.....	14
Figure 2: Create a New JMS Server	14
Figure 3: Create a New JMS Server – Select Targets.....	15
Figure 4: Summary of JMS Servers	15
Figure 5: JMS Module	16
Figure 6: Create JMS System Module	17
Figure 7: Create JMS System Module	17
Figure 8: Summary of JMS Modules.....	18
Figure 9: Setting for RTI.....	19
Figure 10: Create a New Subdeployment.....	19
Figure 11: Create a New Subdeployment.....	19
Figure 12: Settings for RTI.....	20
Figure 13: Subdeployments	20
Figure 14: JMS Modules	21
Figure 15: Settings for RTI.....	21
Figure 16: Create a New JMS System Module Resource	21
Figure 17: Create a New JMS System Module Resource	22
Figure 18: Create a New JMS System Module Resource - Targets.....	22
Figure 19: Settings for RTI - JMS connection Factory.....	22
Figure 20: settings for JMS Connection Factory.....	23
Figure 21: JMS Modules	24
Figure 22: Settings for RTI - JMS topic.....	24
Figure 23: Select type of resource	25
Figure 24: Create a New JMS System Module Resource	25
Figure 25: Create a New JMS System Module Resource	26
Figure 26: JMS Topic created successfully	26
Figure 27: JMS Topic created.....	27
Figure 28: JMS Queue - Create a New JMS system Module	28
Figure 29: JMS Queue - Create a New JMS system Module	29
Figure 30: JMS Queue - Create a New JMS System Module Resource	29
Figure 31: JMS Queue created successfully	30
Figure 32: JMS Queues	31

Figure 33: Buses	32
Figure 34: Create a New Service Integration Bus	32
Figure 35: Create a New Service Integration Bus	33
Figure 36: Buses	33
Figure 37: RTI Server.....	34
Figure 38: Bus members.....	34
Figure 39: Add a New Bus Member.....	35
Figure 40: Bus Members created successfully	36
Figure 41: JMS Providers.....	37
Figure 42: Connection Factories	37
Figure 43: JMS Connection Factory	38
Figure 44: JMS Connection Factory – Not default port.....	40
Figure 45: Queues	41
Figure 46: Select JMS resource provider.....	41
Figure 47: General Properties section	42
Figure 48: Queue Name.....	43
Figure 49: Set queue attributes.....	43
Figure 50: Assign the queue to a bus member	44
Figure 51: Confirm queue creation	44
Figure 52: Configuration.....	45
Figure 53: Queues	45
Figure 54: JMS Queue	46
Figure 55: WebSphere - JMS Topics.....	47
Figure 56: Select JMS resource provider.....	47
Figure 57: Configuration screen.....	48
Figure 58: Create new topic space	49
Figure 59: Confirm topic space creation	49
Figure 60: Global Security screen.....	50
Figure 61: CSiv2 inbound communications	51
Figure 62:CSiv2 outbound communications	51
Figure 63: Application Servers.....	78
Figure 64: Application Servers.....	78
Figure 65: Ports List	79
Figure 66: Application servers	80

Figure 67: Configuration..... 80
Figure 68: Transport Chain 81

LIST OF TABLES

Table 1: Subdeployment - Field Values	20
Table 2: JMS Topic - Field Values	25
Table 3: JMS Topic - Field Values	26
Table 4: JMS Queue - Field Values	29
Table 5: WebLogic JMS Queues - Field Values	30
Table 6: JMS Connection Factory: Field Values	39
Table 7: JMS Queues General Properties - Field Values	42
Table 8: WebSphere JMS Queues - Field Values	46
Table 9: JMS Topic General Properties - Field Values	48
Table 10: RMI/IIOP authentication Settings	50
Table 11: JSON Request Header Parameters	59
Table 12: Additional configuration for without sample application	61

Preface

This Preface provides supporting information for the Oracle Financial Services Analytical Applications Infrastructure Inline Processing Configuration (OFSAAI IPE) Guide and includes the following topics:

- [Summary](#)
- [Audience](#)
- [Documentation Accessibility](#)
- [Related Documents](#)
- [Conventions](#)

Summary

You can find the latest copy of this document in the [OHC library](#) which includes all the recent additions/revisions (if any) done till date.

Before you begin the installation, ensure that you have an access to the Oracle Support Portal with the required login credentials to quickly notify us of any issues at any stage. You can obtain the login credentials by contacting Oracle Support.

Audience

Oracle Financial Services Analytical Applications Infrastructure Inline Processing Application Configuration Guide is intended for administrators and implementation consultants who are responsible for installing and maintaining the application pack components.

Prerequisites for the Audience

Following are the expected preparations before starting the actual installation:

The document assumes you have experience in installing Enterprise components. Basic knowledge about the Oracle Financial Services Analytical Applications Infrastructure Applications Pack components, Inline Processing Sample Application, OFSAA Architecture, UNIX commands, Database concepts and Web Server/ Web Application Server is recommended.

Related Documents

This section identifies additional documents related to OFSAA Infrastructure. You can access Oracle documentation online from the Documentation Library for OFSAAI 8.0.6.0.0 ([OHC](#)).

- *Oracle Financial Services Analytical Applications Infrastructure Inline Processing User Guide*

- *Oracle Financial Services Analytical Applications Infrastructure Inline Processing Sample Application Installation Guide*
- *Release Notes*

Conventions and Acronyms

The following conventions are used in this guide.

Conventions	Description
Bold.	Indicates Actions
Courier New font	Indicates Command or Query

Acronyms

This guide contains the following acronyms.

Acronyms	Description
IPE	Inline Processing Engine
Infodom	Information Domain
OFS AAI	Oracle Financial Services Analytical Application Infrastructure.
OFS AAAI	Oracle Financial Services Advanced Analytical Application Infrastructure.
OHC	Oracle Help Center
JSON	JavaScript Object Notation
REST	Representational State Transfer
JMS	Java Message Service

1 About OFSAAI IPE

This chapter includes the following topics:

- [About OFSAA](#)
- [About IPE](#)

1.1 About OFSAA

In today's turbulent markets, financial institutions require a better understanding of their risk-return, while strengthening competitive advantage and enhancing long-term customer value. Oracle Financial Services Analytical Applications (OFSAA) enable financial institutions to measure and meet risk adjusted performance objectives, cultivate a risk management culture through transparency, lower the costs of compliance and regulation, and improve insight into customer behavior.

OFSAA uses industry-leading analytical methods, shared data model and applications architecture to enable integrated risk management, performance management, customer insight, and compliance management. OFSAA actively incorporates risk into decision making, enables to achieve a consistent view of performance, promote a transparent risk management culture, and provide pervasive intelligence.

Oracle Financial Services Analytical Applications delivers a comprehensive, integrated suite of financial services analytical applications for both banking and insurance domain.

1.2 About IPE

This guide provides step by step instructions for performing Inline Processing Configuration process actions. Inline Processing builds a scoring mechanism for activity data like transactions in real time or batch mode. For example, this capability enables you to identify fraud events earlier, avert more losses, and minimize customer service and retention issues.

2 Configuring IPE

This chapter discusses the prerequisite instructions required to configure IPE.

2.1 Prerequisites

The following prerequisite configurations must be verified before installation:

- A user must be created and mapped with the IPEADMN (Inline Processing Admin Group) user group. To create a user, refer *Oracle Financial Services Advanced Analytics Applications Infrastructure User Guide* on [OHC](#).
- The IPEADMIN user group must be mapped with Infodom.
- Connection Pooling and Data Source must be created for the following schemas:
 - Config Schema with Data Source name as jdbc/FICMASTER
 - IPE Atomic Schema with Data Source name as jdbc/<INFODOM NAME>

NOTE: jdbc/<INFODOM NAME> should be pointed to metadom. For more information, refer the section on **Information Domain** in *Oracle Financial Services Advanced Analytics Applications Infrastructure User Guide* on [OHC](#).

- IPE Atomic schema with Data Source name as jdbc/<INFODOM NAME>CNF

NOTE: jdbc/<INFODOM NAME>CNF is required only for real time processing

For more information, refer to section *Configuring Resource Reference* of the *OFS AAAI Application Pack Installation and Configuration Guide*.

- **Oracle Database Patches:** Ensure that the patches mentioned in the section *Hardware and Software Properties* of the *OFS AAAI Application Pack Installation and Configuration Guide 8.0.2.0.0* are applied.

The WebSphere JDBC Providers should point to the oracle driver file path where the patch is installed.

3 Configuring IPE in Web Application Servers for Real Time Mode

This section explains the details about configuring the Web Application Servers.

This section includes the following topics:

- [Configuring IPE in WebLogic](#)
- [Configuring IPE in WebSphere](#)
- [Configuring IPE in Tomcat](#)
- [Configuring IPE in Kafka](#)

3.1 Configuring IPE in WebLogic

To configure IPE in WebLogic, follow these topics:

- [Login to WebLogic Administrative console](#)
- [Configuring JMS Servers](#)
- [Configuring JMS Modules](#)
- [Creating Subdeployments](#)
- [Creating JMS Connection Factory](#)
- [Creating JMS Topic](#)
- [Creating JMS Queues](#)

3.1.1 Login to WebLogic Administrative Console

To login to the WebLogic Administrative Console, follow these steps:

1. Open the following URL in the browser window:
`http://<ipaddress>:<administrative console port>/console`. (https if SSL is enabled). The Welcome window is displayed.
2. Login with the Administrator Username and Password.

3.1.2 Configuring JMS Servers

To configure JMS Servers, follow these steps:

1. In the Domain Structure LHS menu, click **+** to expand **Services**.
2. Click **+** to expand **Messaging**. The *WebLogic Server Administration Console* page is displayed.
3. Select **JMS Servers**. The *Summary of JMS Servers* page is displayed.

Configuring IPE in Web Application Servers for Real Time Mode

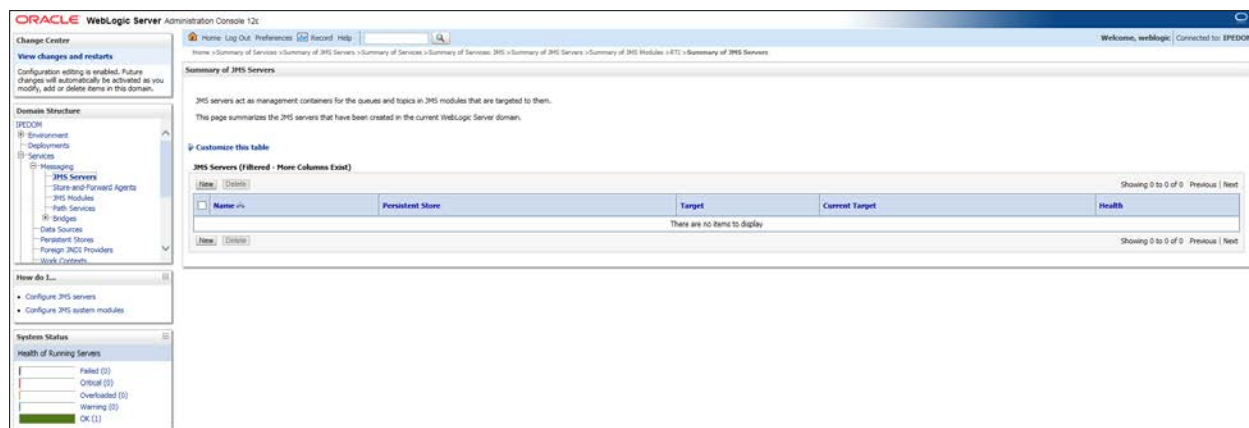


Figure 1: Summary of JMS Server

4. Click **New**. The *Create a New JMS Server* page is displayed.

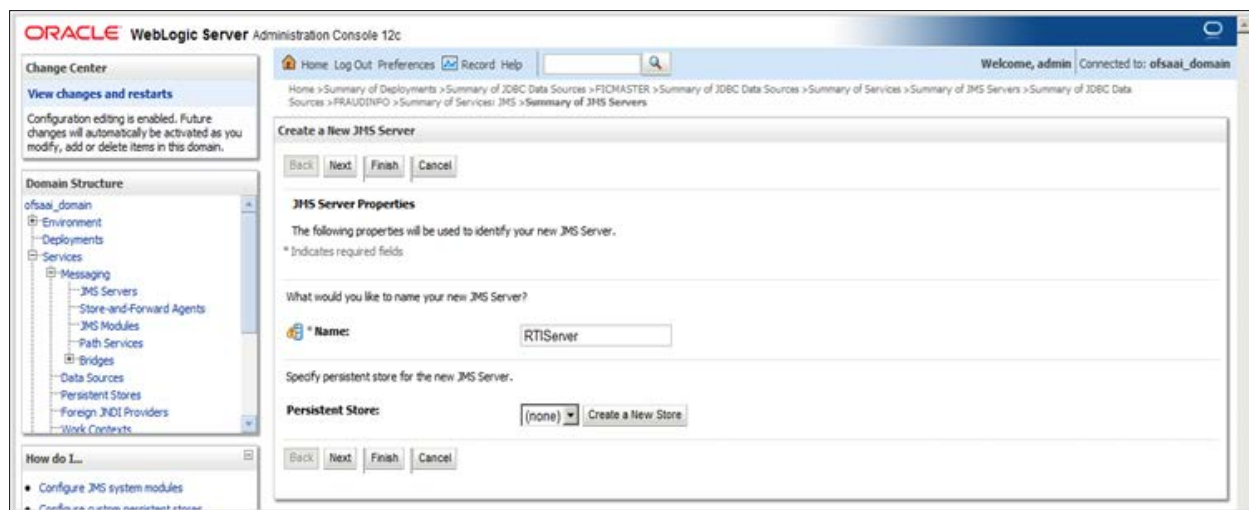


Figure 2: Create a New JMS Server

5. Enter the name as **RTIServer** under JMS Server Properties.
6. Click **Next**. The *Select Targets* section is displayed.

Configuring IPE in Web Application Servers for Real Time Mode

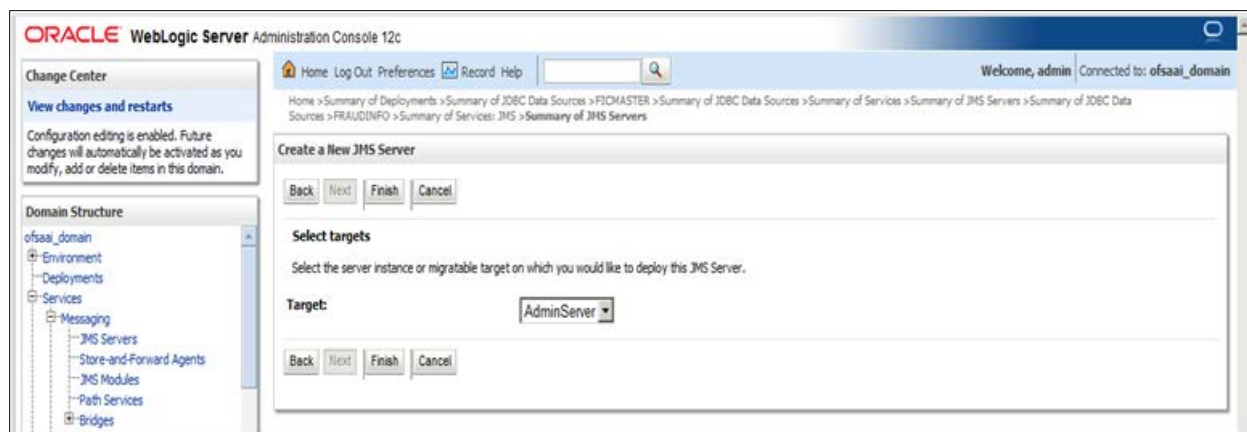


Figure 3: Create a New JMS Server – Select Targets

7. Select the Target as **AdminServer**.
8. Click **Finish**.

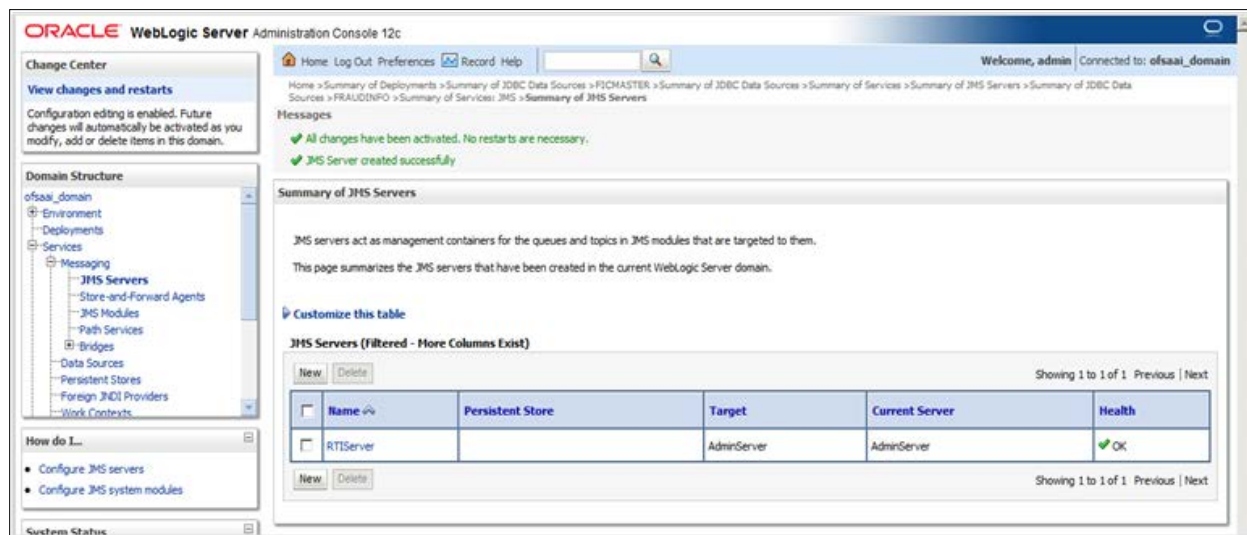


Figure 4: Summary of JMS Servers

9. The following confirmation message is displayed
JMS Server is created successfully.

Configuring IPE in Web Application Servers for Real Time Mode

3.1.3 Configuring JMS Modules

To configure JMS Modules, follow these steps:

1. In the Domain Structure LHS menu, click **+** to expand **Services**.
2. Click **+** to expand **Messaging**.
3. Click **JMS Modules**. The *JMS Module* screen is displayed.


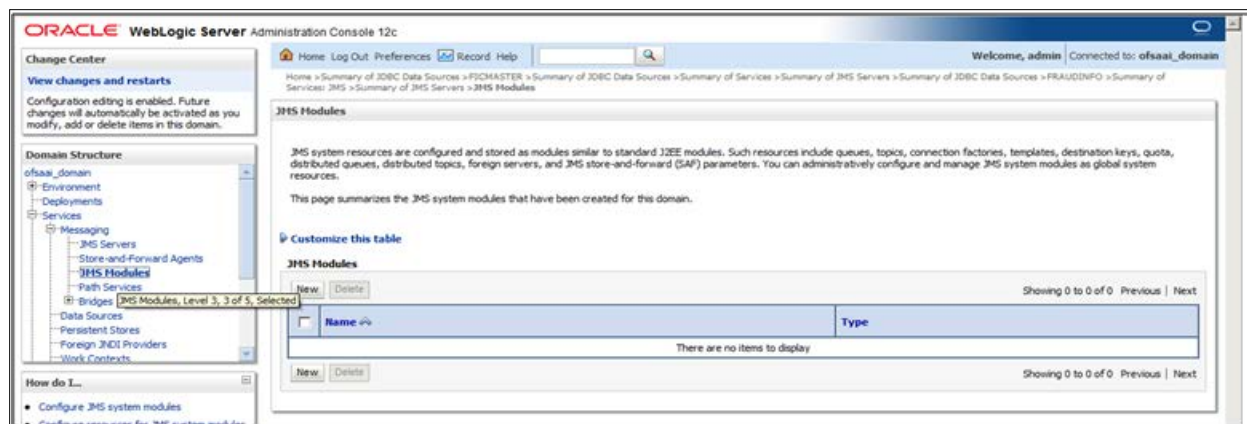


Figure 5: JMS Module

4. Click **New**. The *Create JMS System Module* page is displayed.

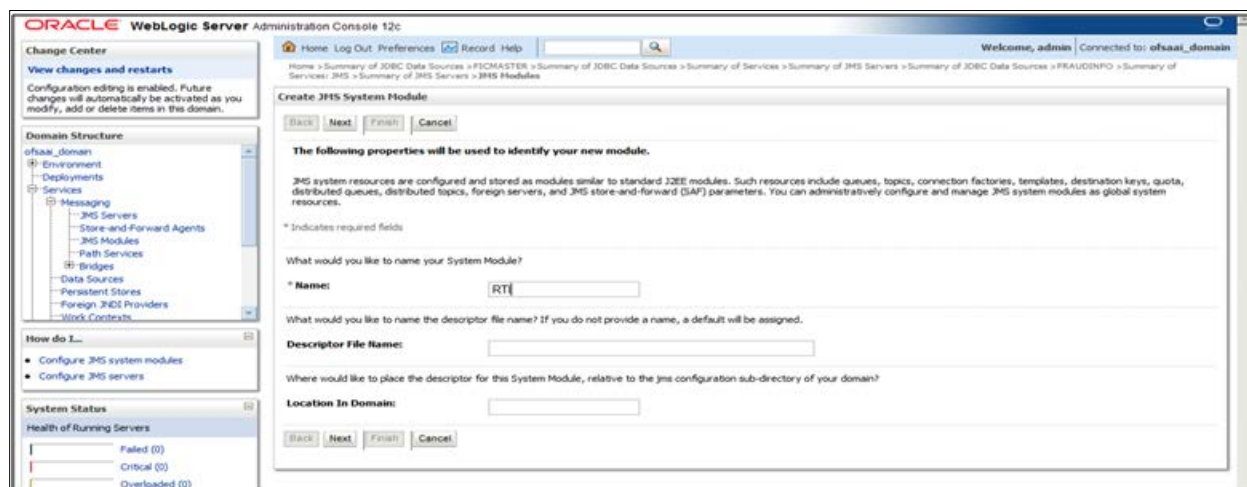

5. Enter the name as **RTI**.
6. Click **Next**. The *Create JMS System Module* page is displayed.

Configuring IPE in Web Application Servers for Real Time Mode

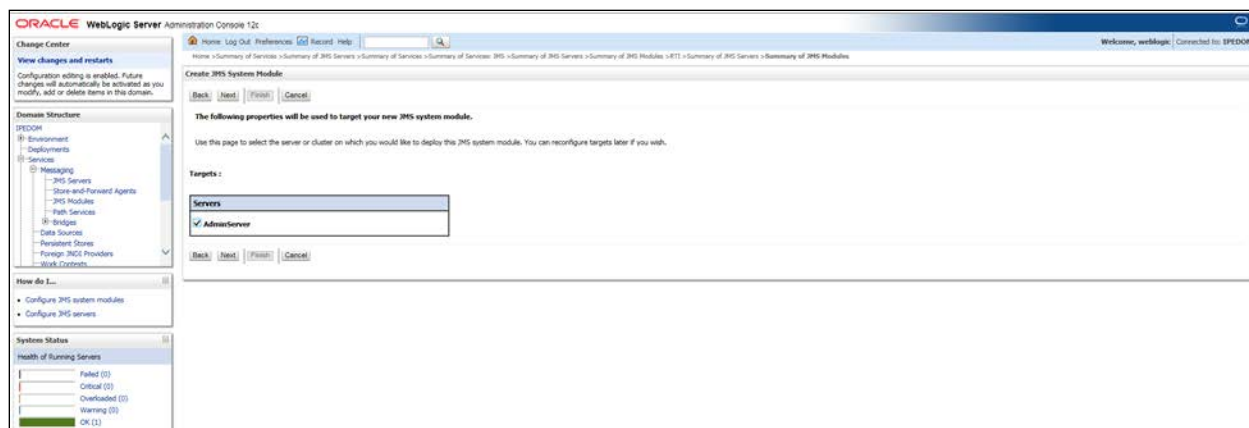


Figure 6: Create JMS System Module

7. Check the **AdminServer** in the *Servers* section.
8. Click **Next**.

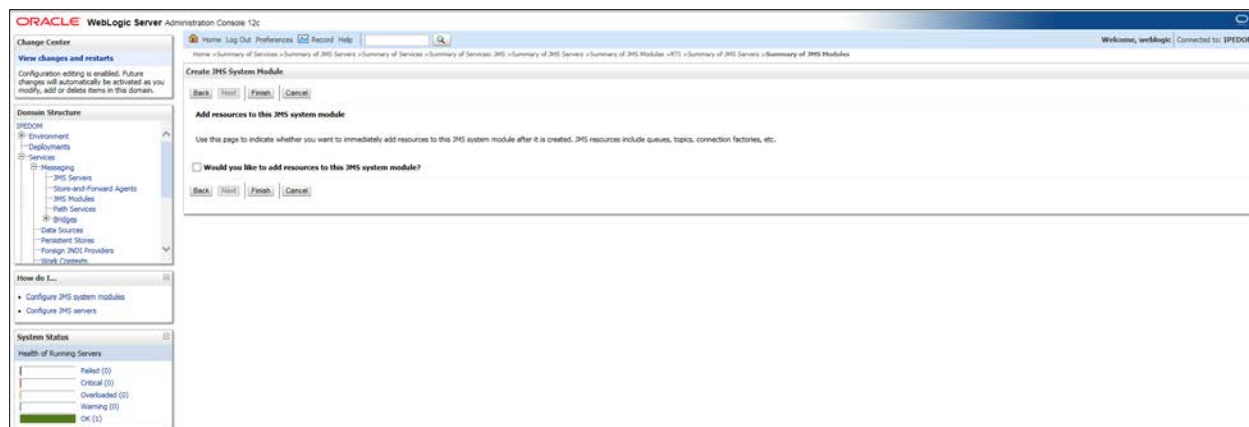


Figure 7: Create JMS System Module

9. Click Finish.

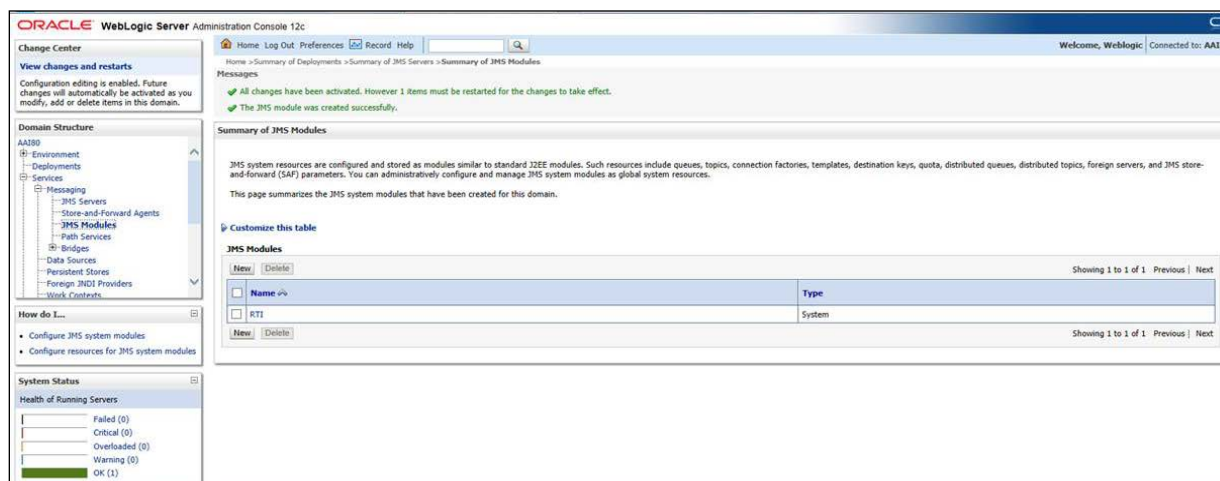


Figure 8: Summary of JMS Modules

10. The following confirmation message is displayed: *JMS Module is created successfully.*

3.1.4 Creating Subdeployments

This section discusses the following Subdeployments which are to be created

- [Creating RTI Deploy](#)
- [Creating RTISubdeploy](#)

3.1.4.1 Creating RTI Deploy

To create **RTI Deploy** subdeployment, follow these steps:

1. In the Domain Structure LHS menu, click **+** to expand **Services**.
2. Click **+** to expand **Messaging**.
3. Click **JMS Modules**. The *JMS Module* screen is displayed.
4. Click JMS Module **RTI**. The *Settings for RTI* screen is displayed.
5. Click the **Subdeployments** tab.

Configuring IPE in Web Application Servers for Real Time Mode

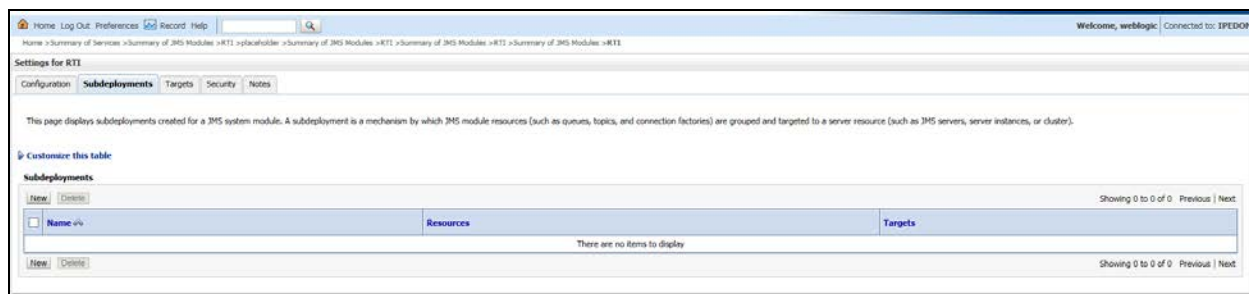


Figure 9: Setting for RTI

6. Click **New**. The *Create a New Subdeployment* screen is displayed.

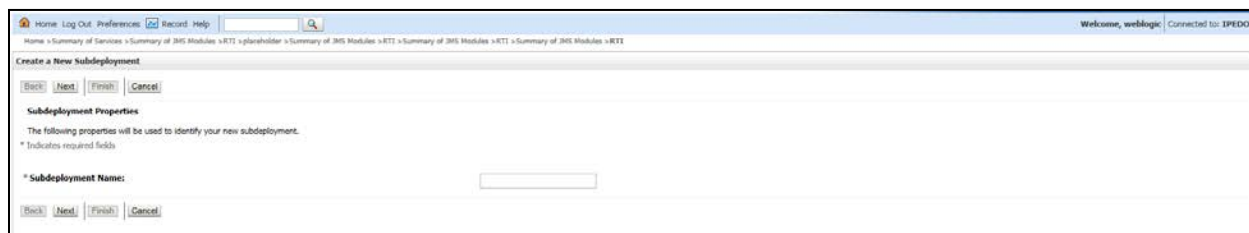


Figure 10: Create a New Subdeployment

7. Enter the Subdeployment Name as **RTI Deploy**.
8. Click **Next**.

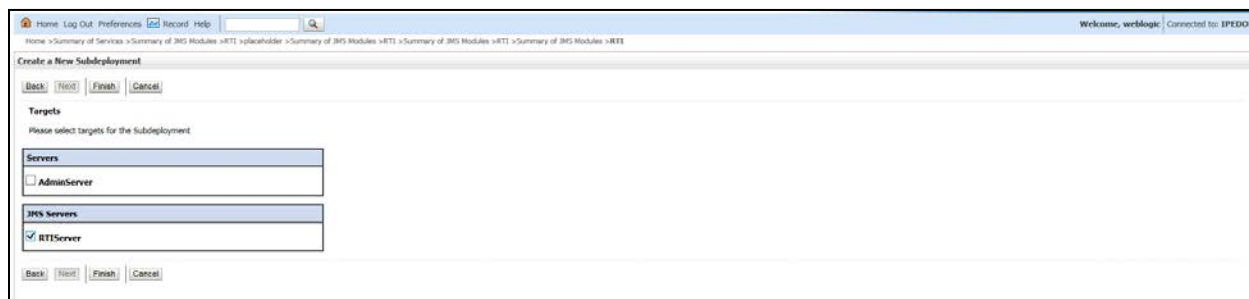


Figure 11: Create a New Subdeployment

9. Select the JMS Servers as **RTIServer**.
10. Click **Finish**.

The following confirmation message is displayed: *Subdeployment is created successfully*.

Configuring IPE in Web Application Servers for Real Time Mode

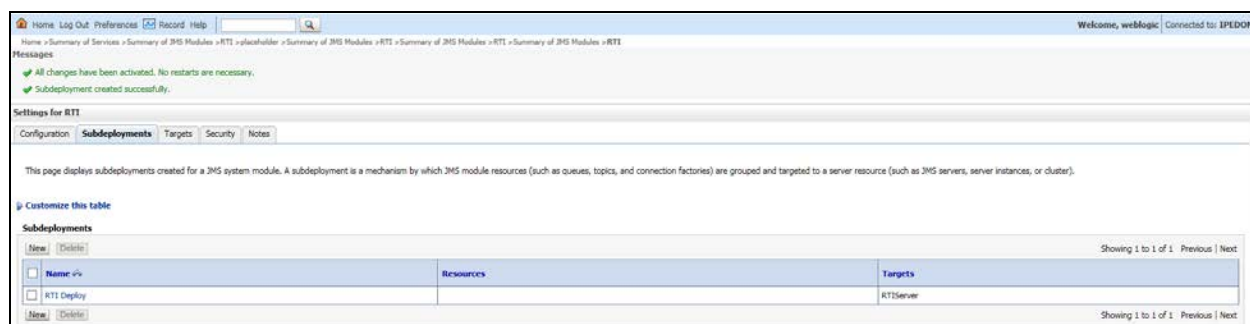


Figure 12: Settings for RTI

3.1.4.2 Creating RTISubdeploy

To create **RTISubdeploy** subdeployment, follow these steps:

1. Repeat Steps 1 - 7 from section [Create RTI Deploy](#).
2. Enter the following details:

Table 1: Subdeployment - Field Values

Field	Value
Subdeployment Name	Enter RTISubdeploy as the name.
JMS Servers	Select RTIServer as the JMS Server.

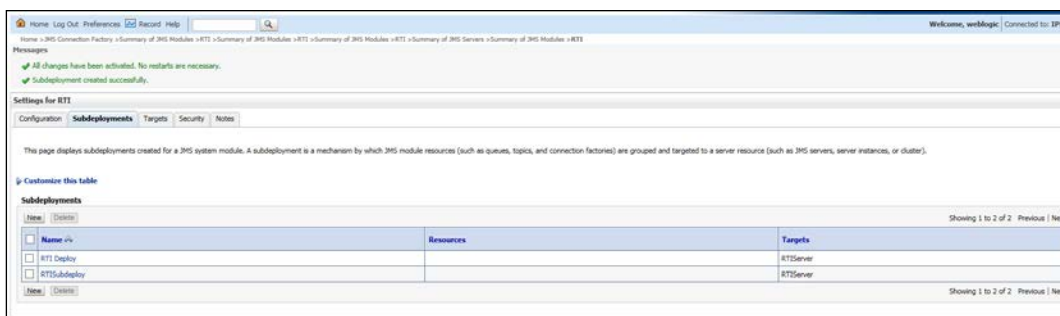


Figure 13: Subdeployments

3. The following confirmation message is displayed: *Subdeployment is created successfully.*

3.1.5 Creating JMS Connection Factory

To create JMS Connection Factories, follow these steps:

1. In the Domain Structure LHS menu, click **+** to expand **Services**.
2. Click **+** to expand **Messaging**.
3. Click **JMS Modules**. The *JMS Modules* screen is displayed.

Configuring IPE in Web Application Servers for Real Time Mode

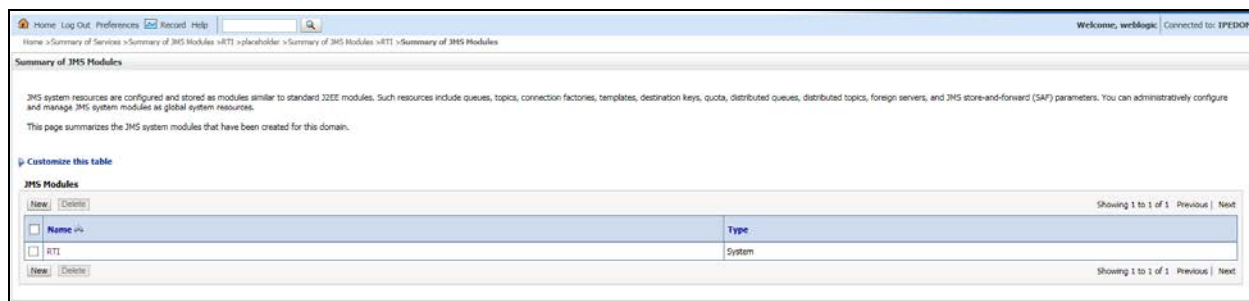


Figure 14: JMS Modules

4. Click **RTI**. The *Settings for RTI* screen is displayed.

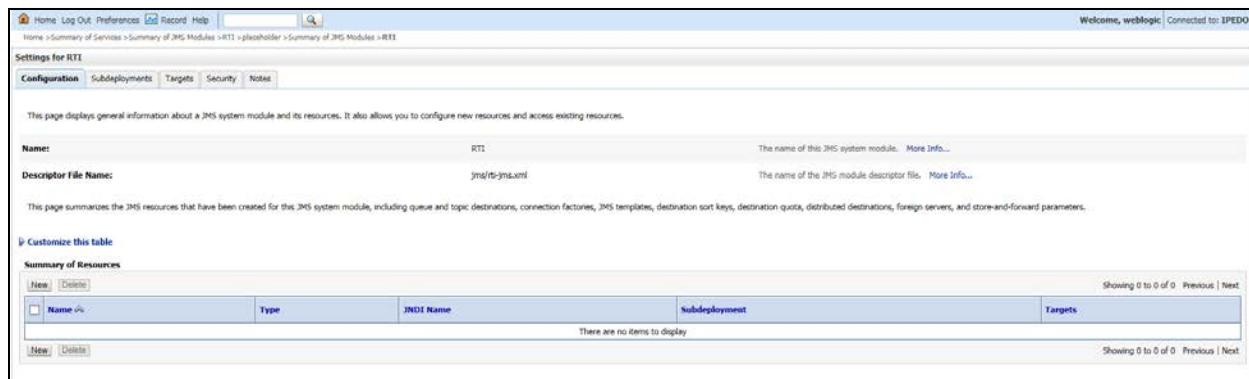


Figure 15: Settings for RTI

5. Click **New**. The *Create a New JMS System Module Resource* screen is displayed.

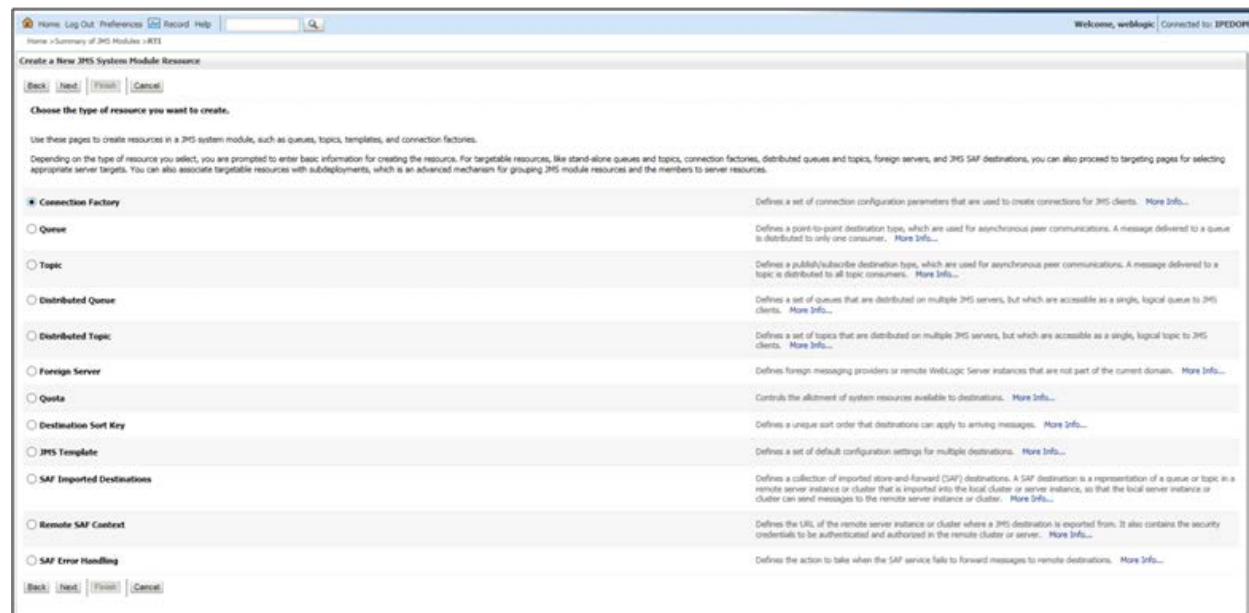


Figure 16: Create a New JMS System Module Resource

6. Select **Connection Factory**.

Configuring IPE in Web Application Servers for Real Time Mode

7. Click **Next**. The Create a New JMS System Module Resource screen is displayed.

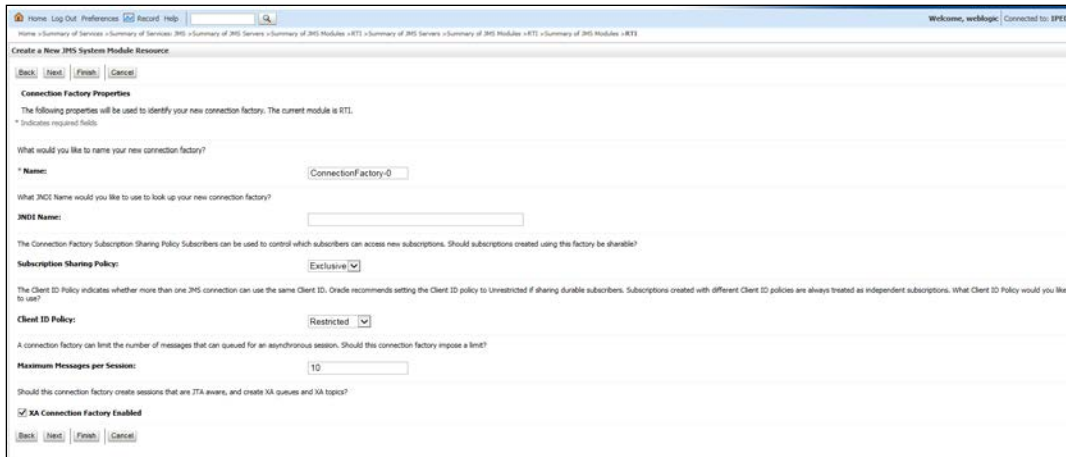


Figure 17: Create a New JMS System Module Resource

8. Enter the Name as JMS Connection Factory.


9. Click **Next**. The *Create a New JMS System Module Resource* screen with the Target section is displayed.



Figure 18: Create a New JMS System Module Resource - Targets

10. Select AdminServer.

11. Click **Finish**.

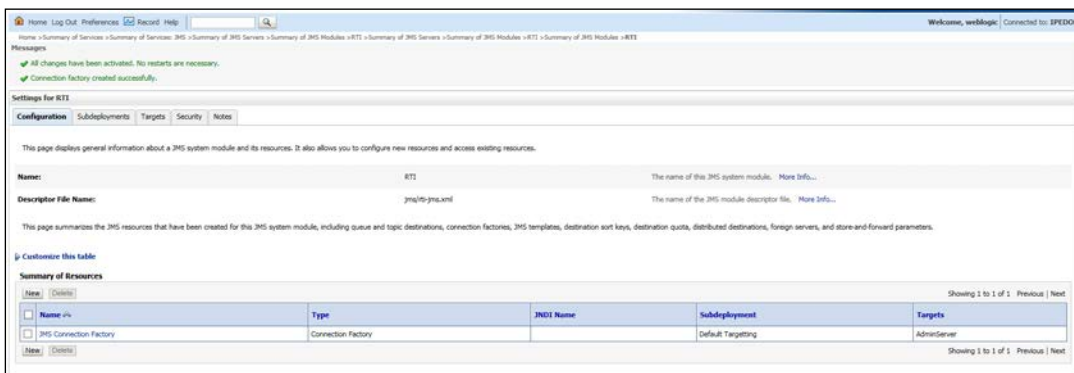

Name	Type	JNDI Name	Subdeployment	Targets
JMS Connection Factory	Connection Factory		Default Targeting	AdminServer

Figure 19: Settings for RTI - JMS connection Factory

Configuring IPE in Web Application Servers for Real Time Mode

- Click **JMS Connection Factory**. The *Settings for JMS Connection Factory* screen is displayed.

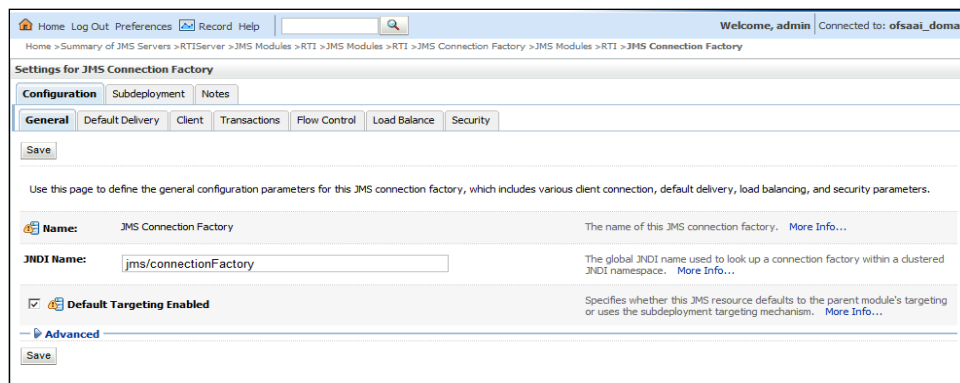


Figure 20: settings for JMS Connection Factory

- Enter the following details:

Field	Value
Name	The name of the JMS connection factory is displayed as JMS Connection Factory.
JNDI Name	jms/connectionFactory
Default Targeting Enabled	Select the check-box to enable Default Targeting.

- Click **Save**.

The following confirmation message is displayed.
JMS Connection Factory is created successfully.



3.1.6 Creating JMS Topic

This section discusses the following JMS Topics to be created:

- [Creating RTI Assessment Response Destination Topic](#)
- [Creating Cache Operation Message Destination Topic](#)

Configuring IPE in Web Application Servers for Real Time Mode

3.1.6.1 Creating RTI Assessment Response Destination Topic

To create JMS Topic, follow these steps:

1. In the Domain Structure LHS menu, click **+** to expand **Services**.
2. Click **+** to expand **Messaging**.
3. Click **JMS Modules**. The *JMS Modules* screen is displayed.

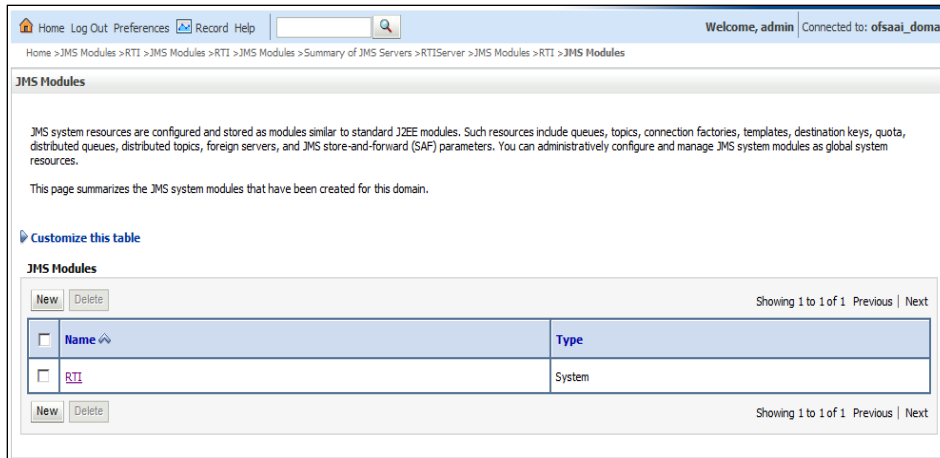


Figure 21: JMS Modules

4. Click **RTI**. The *Settings for RTI* screen is displayed.

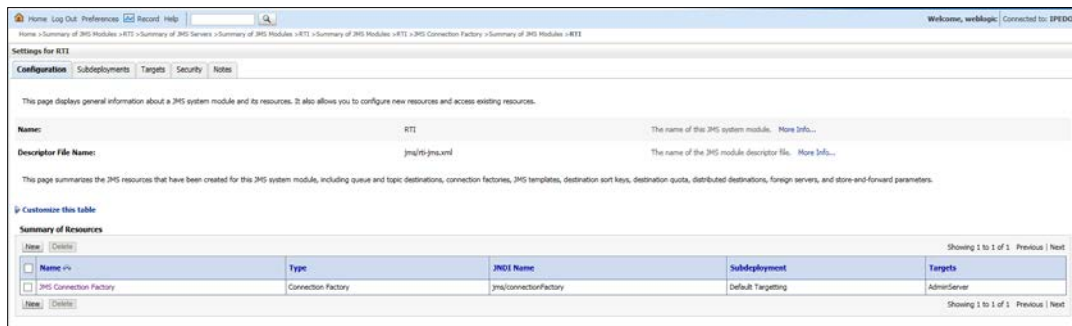


Figure 22: Settings for RTI - JMS topic

5. Click **New**. The *Settings for JMS Connection Factory* screen is displayed.

Configuring IPE in Web Application Servers for Real Time Mode

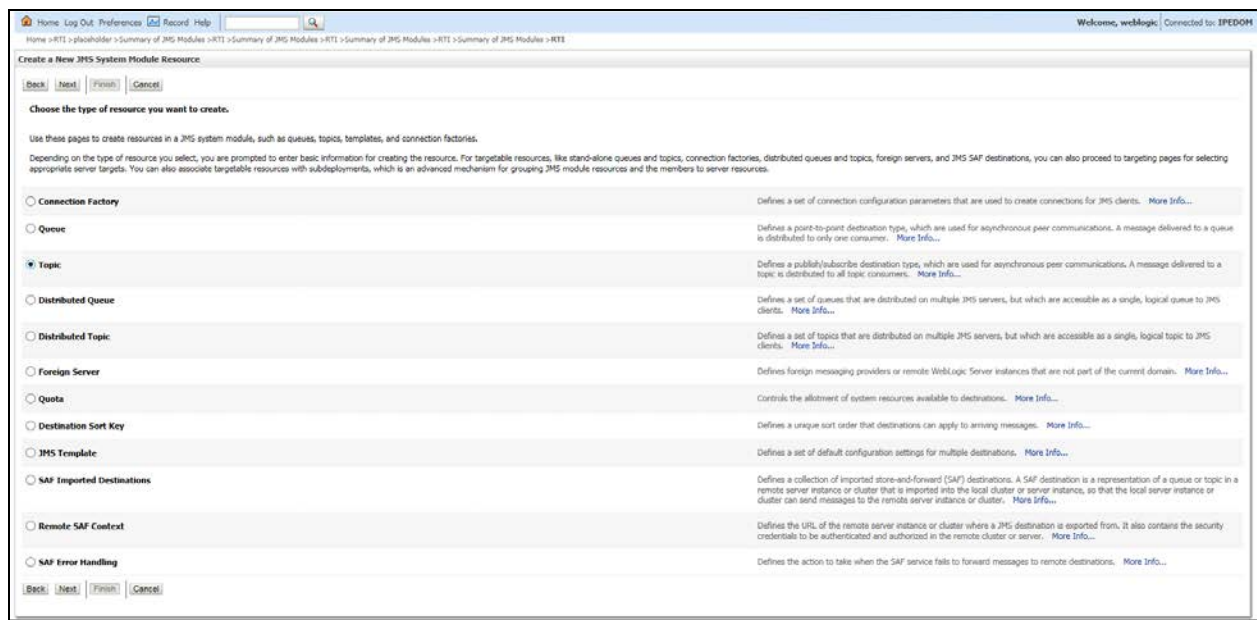


Figure 23: Select type of resource

6. Select **Topic** from the list.
7. Click **Next**. The Create a New JMS System Module Resource screen is displayed.

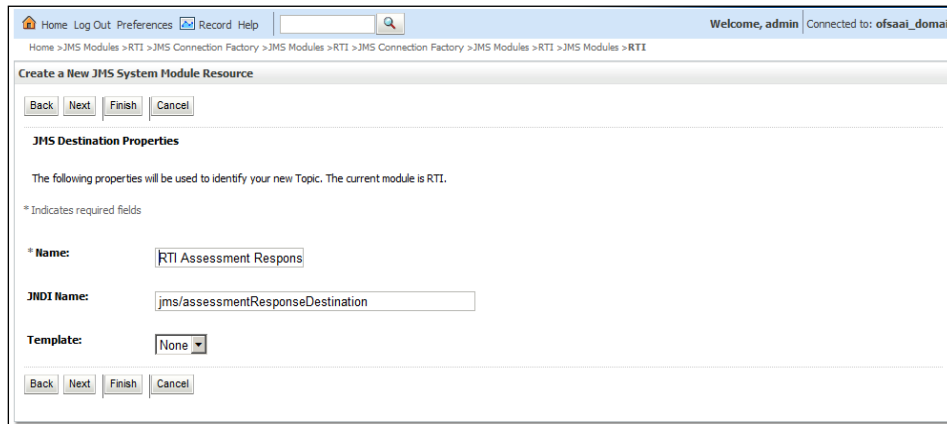


Figure 24: Create a New JMS System Module Resource

8. Enter the following details:

Table 2: JMS Topic - Field Values

Field	Value
Name	RTI Assessment Response Destination Topic
JNDI Name	jms/assessmentResponseDestination

9. Click **Next**. The Create a New JMS System Module Resource screen is displayed.

Configuring IPE in Web Application Servers for Real Time Mode

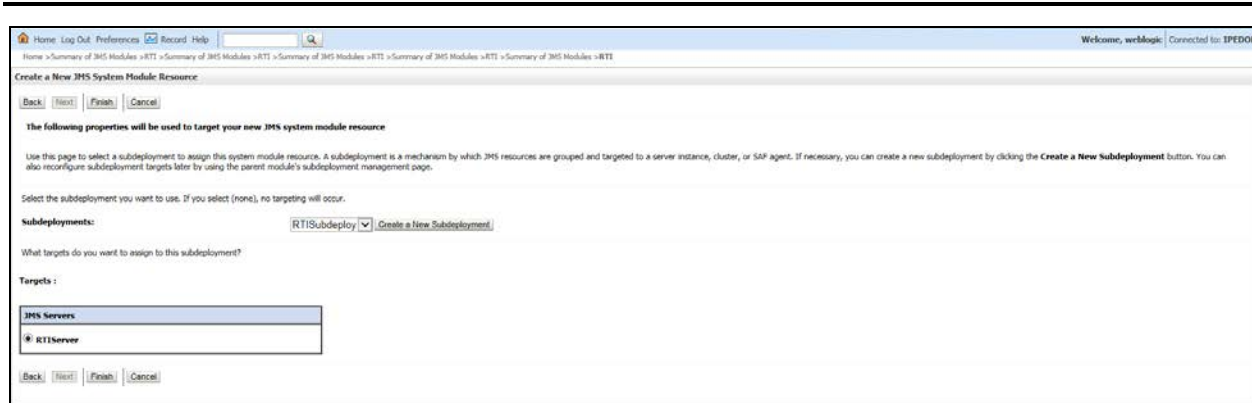


Figure 25: Create a New JMS System Module Resource

10. Select the Subdeployments as **RTISubDeploy**.
11. Select **RTIServer**.
12. Click **Finish**.
13. The following confirmation message is displayed.
JMS Topic is created successfully.

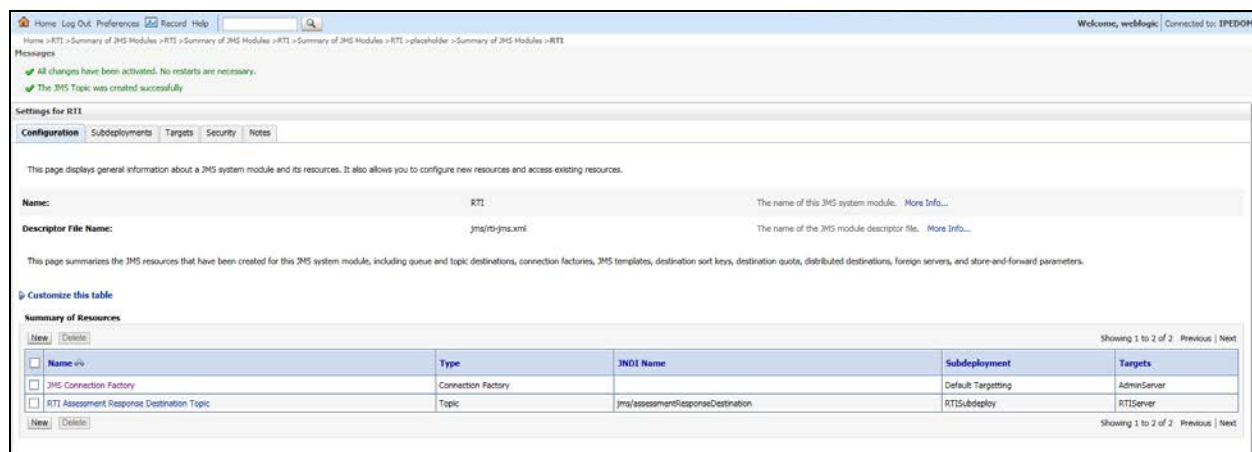


Figure 26: JMS Topic created successfully

3.1.6.2 Creating Cache Operation Message Destination Topic

To create Cache Operation Message Destination Topic, follow these steps:

1. Repeat Steps 1 - 13 from section [Creating RTI Assessment Response Destination Topic](#).
2. Enter the following details:

Table 3: JMS Topic - Field Values

Field	Value
Name	Cache Operation Message Destination Topic

Configuring IPE in Web Application Servers for Real Time Mode

Field	Value
JNDI Name	.jms/cacheOperationMessageDestination

- The following confirmation message is displayed.
JMS Topic is created successfully.

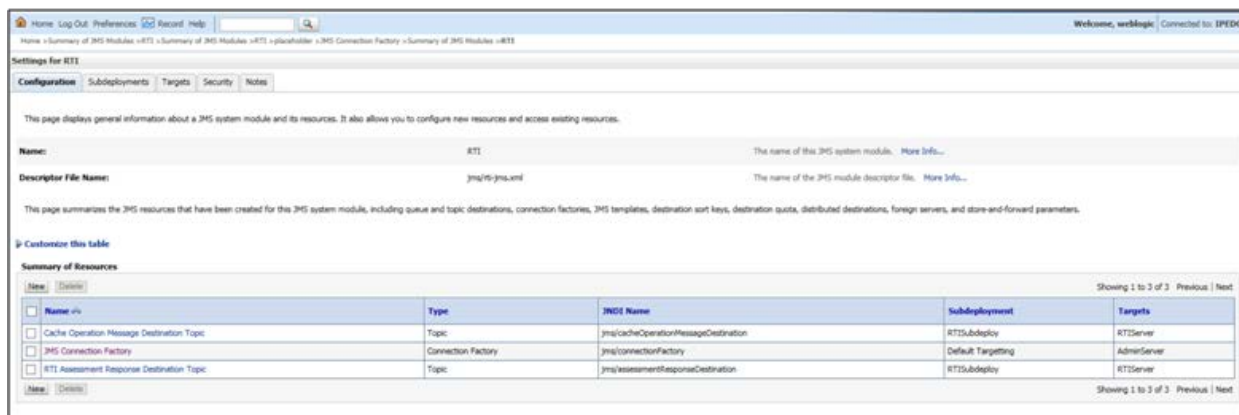


Figure 27: JMS Topic created

3.1.7 Creating JMS Queues

This section discusses the following queues to be created:


- RTI Feedback Queue
- RTI Source Entity Queue
- Wire Transaction Source Entity Queue
- RTI Hold JMS Queue

3.1.7.1 RTI Feedback Queue

To create the RTI Feedback Queue, follow these steps:

- In the Domain Structure LHS menu, click **+** to expand **Services**.
- Click **+** to expand **Messaging**.
- Click **JMS Modules**.
- Click **RTI**. The *Settings for RTI* screen is displayed.

Configuring IPE in Web Application Servers for Real Time Mode

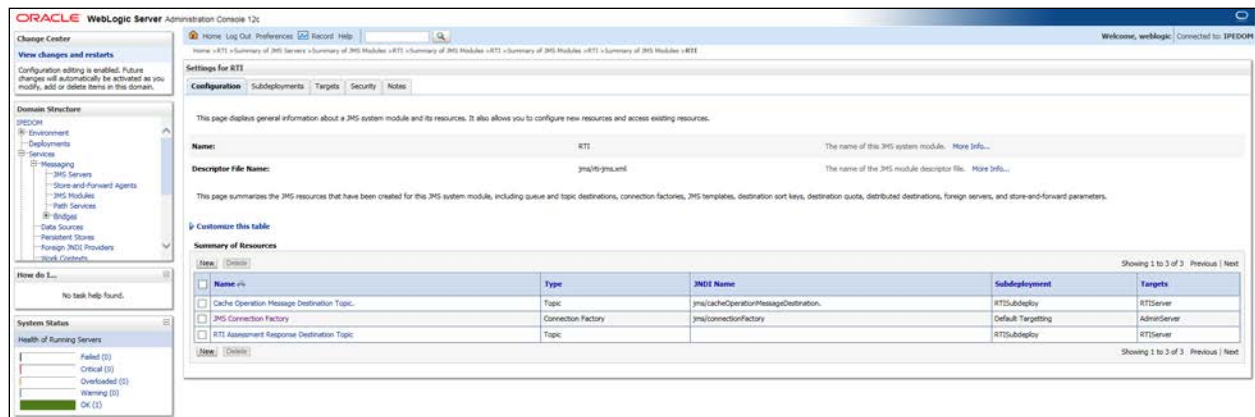

5. Click **New**. The Create a New JMS System Module Resource screen is displayed.

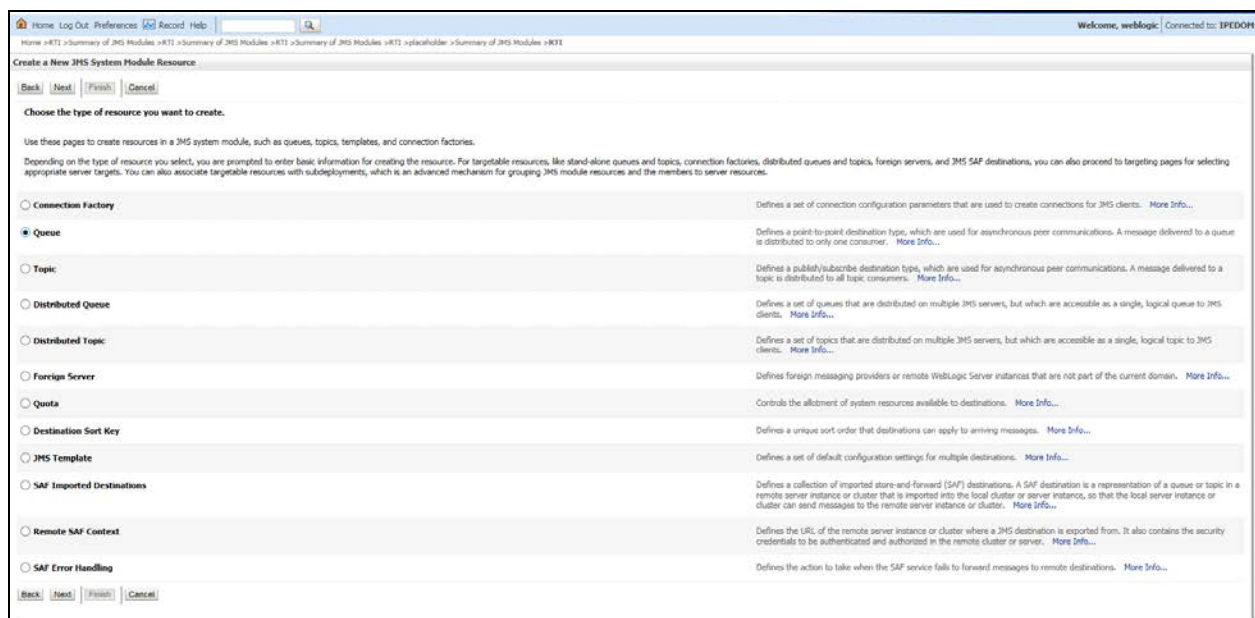


Figure 28: JMS Queue - Create a New JMS system Module

6. Select **Queue** from the list.

7. Click **Next**. The Create a New JMS System Module Resource screen is displayed.

Configuring IPE in Web Application Servers for Real Time Mode

Home Log Out Preferences Record Help Welcome, admin Connected to: ofsaai_domain

Home > JMS Modules > RTI > JMS Connection Factory > JMS Modules > RTI > JMS Connection Factory > JMS Modules > RTI > JMS Modules > RTI

Create a New JMS System Module Resource

Back Next Finish Cancel

JMS Destination Properties

The following properties will be used to identify your new Queue. The current module is RTI.

* Indicates required fields

* Name: RTI Feedback Queue

JNDI Name: jms/feedbackQueue

Template: None

Back Next Finish Cancel

Figure 29: JMS Queue - Create a New JMS system Module

8. Enter the following details:

Table 4: JMS Queue - Field Values

Field	Value
Name	RTI Feedback Queue
JNDI Name	.jms/feedbackQueue

9. Click **Next**.

10. Select the Subdeployments as **RTISubDeploy**.

Home Log Out Preferences Record Help Welcome, weblogic Connected to: TPEDOH

Home > RTI > Summary of JMS Modules > RTI > Summary of JMS Modules > RTI > rticalholder > Summary of JMS Modules > RTI

Create a New JMS System Module Resource

Back Next Finish Cancel

The following properties will be used to target your new JMS system module resource:

Use this page to select a subdeployment to assign this system module resource. A subdeployment is a mechanism by which JMS resources are grouped and targeted to a server instance, cluster, or SAF agent. If necessary, you can create a new subdeployment by clicking the **Create a New Subdeployment** button. You can also reconfigure subdeployment targets later by using the parent module's subdeployment management page.

Select the subdeployment you want to use. If you select (none), no targeting will occur.

Subdeployments: RTISubDeploy Create a New Subdeployment

What targets do you want to assign to this subdeployment?

Targets:

JMS Servers

RTIServer

Back Next Finish Cancel

Figure 30: JMS Queue - Create a New JMS System Module Resource

11. Click **Finish**.

12. The following confirmation message is displayed.

RTI Feedback Queue is created *successfully*.

Configuring IPE in Web Application Servers for Real Time Mode

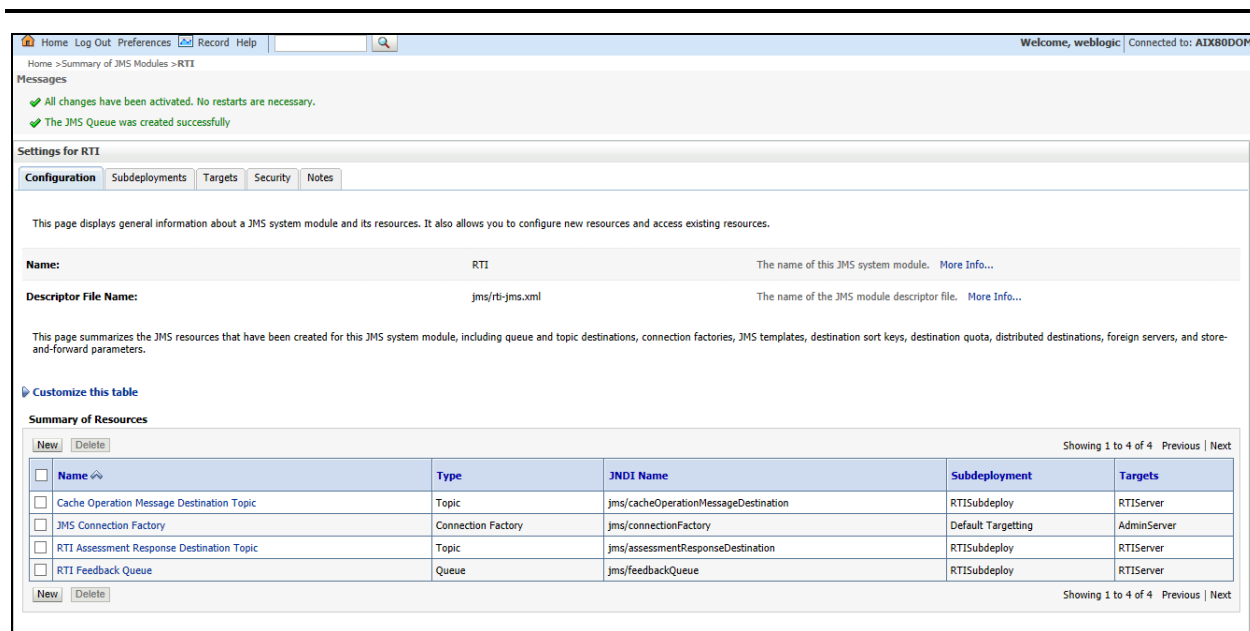


Figure 31: JMS Queue created successfully

3.1.7.2 Creating Remaining JMS Queues

To create the remaining JMS Queues, follow these steps:


1. Repeat Steps 1 - 11 as in section [RTI feedback Queue](#).
2. Enter the values given in the following table.

Table 5: WebLogic JMS Queues - Field Values

Queue Name	Fields		
	Name	JNDI name	Subdeployment
RTI Hold JMS Queue	Enter the name as RTI Hold JMS Queue	Enter the JNDI name as jms/TransactionActionQueue	Select the Subdeployment as RTISubDeploy
RTI Source Entity Queue	Enter the name as RTI Source Entity Queue	Enter the JNDI name as jms/sourceEntityQueue	Select the Subdeployment as RTISubDeploy
Wire Transaction Source Entity Queue	Enter the name as Wire Transaction Source Entity Queue	Enter the JNDI name as jms/wireTrxnQueue	Select the Subdeployment as RTISubDeploy

3. The following confirmation message is displayed.
The JMS Queue was created successfully.

Configuring IPE in Web Application Servers for Real Time Mode

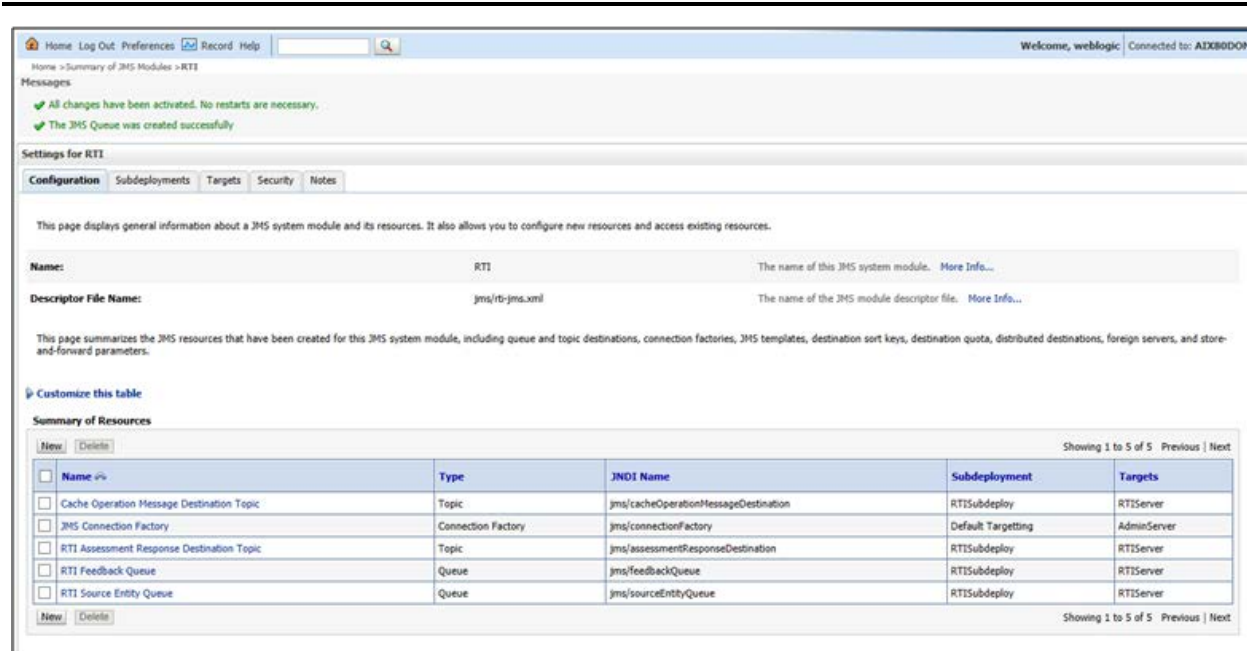

The screenshot shows the WebSphere Administration Console interface for configuring the RTI JMS system module. The page includes a navigation bar at the top with links like Home, Log Out, Preferences, Record, and Help. Below the navigation bar, there are messages indicating that changes have been activated and a JMS Queue was created successfully. The main content area is titled "Settings for RTI" and has tabs for Configuration, Subdeployments, Targets, Security, and Notes. The Configuration tab is active, showing a summary of resources. A table titled "Summary of Resources" lists five JMS resources with columns for Name, Type, JNDI Name, Subdeployment, and Targets.

Name	Type	JNDI Name	Subdeployment	Targets
Cache Operation Message Destination Topic	Topic	jms/cacheOperationMessageDestination	RTISubdeploy	RTIServer
JMS Connection Factory	Connection Factory	jms/connectionFactory	Default Targetting	AdminServer
RTI Assessment Response Destination Topic	Topic	jms/assessmentResponseDestination	RTISubdeploy	RTIServer
RTI Feedback Queue	Queue	jms/feedbackQueue	RTISubdeploy	RTIServer
RTI Source Entity Queue	Queue	jms/sourceEntityQueue	RTISubdeploy	RTIServer

Figure 32: JMS Queues

3.1.8 Restart Weblogic Domain

For more information, refer to the **Start/Stop Infrastructure Services** section in the *Oracle Financial Services Analytical Applications Infrastructure Installation and Configuration Guide* available on the [OHC](#) page.

3.2 Configuring IPE in WebSphere

This section explains the WebSphere configuration for IPE and includes the following topics:

- [Login to WebSphere](#)
- [JMS Providers](#)
- [JMS Connection Factories](#)
- [JMS Queues](#)
- [JMS Topics](#)

3.2.1 Login to WebSphere

To configure IPE on WebSphere follow these steps:

1. Open the following URL in the browser window:
`http://<ipaddress>:<administrative console port>/ibm/console`. (https if SSL is enabled). The Login window is displayed.
2. Login with the Administrator **Username** and **Password**.

3.2.2 Bus Creation

1. Click + to expand **Service Integration** in the LHS menu.
2. Click **Buses**. The Buses page is displayed.



Figure 33: Buses

3. Click **New**. The Create a New Service Integration Bus screen is displayed



Figure 34: Create a New Service Integration Bus

4. Enter the name as **RTIServer**.
5. Un-check Bus security.
6. Click **Next**.

Configuring IPE in Web Application Servers for Real Time Mode

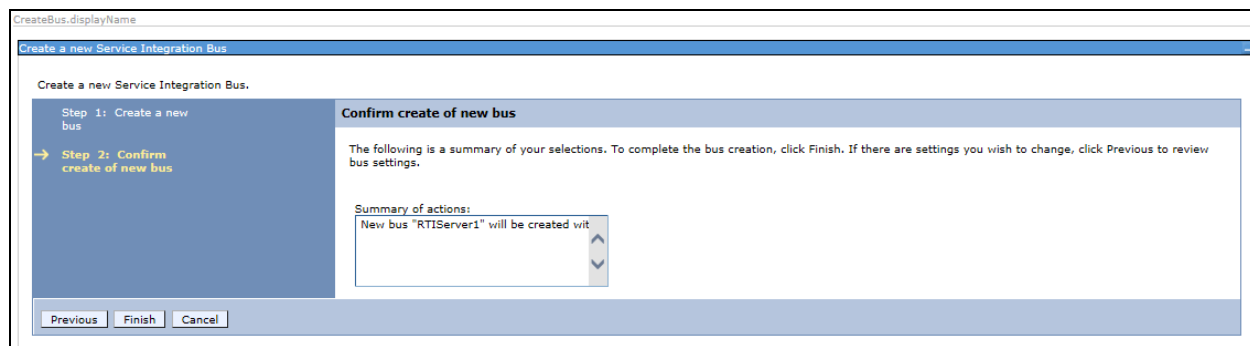


Figure 35: Create a New Service Integration Bus

7. Click **Finish**.
8. Click **Save**.

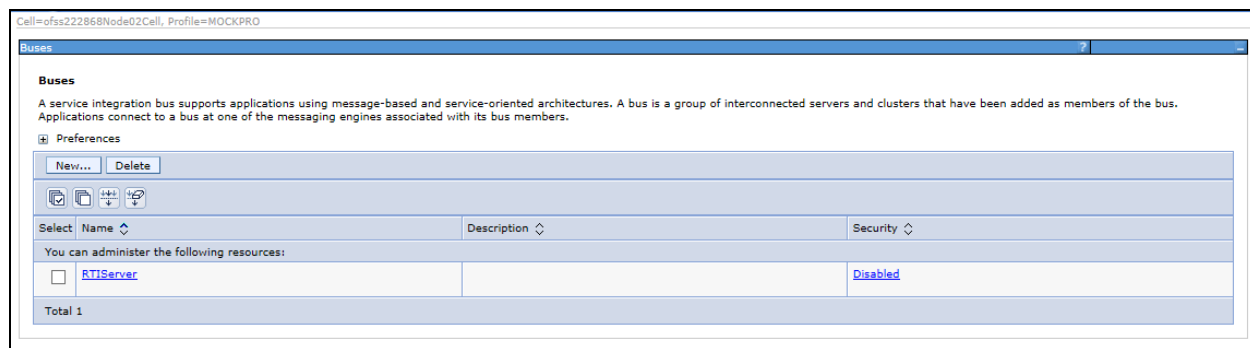


Figure 36: Buses

3.2.3 Bus Member Creation

To create a Bus Member follow these steps:

1. Click + to expand **Service Integration** in the LHS menu.
2. Click **Buses**.
3. Click **RTIServer**. The RTI Server screen is displayed.

Configuring IPE in Web Application Servers for Real Time Mode

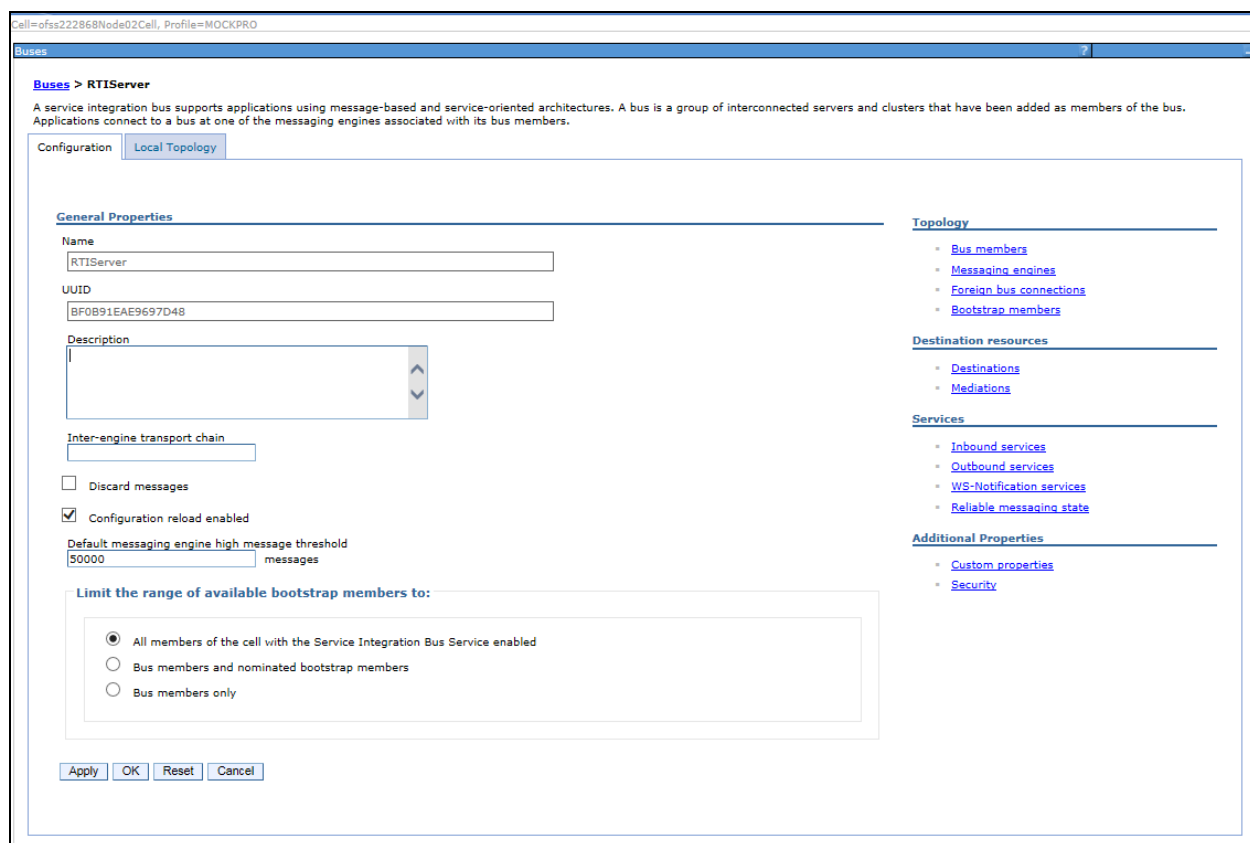


Figure 37: RTI Server

- In the Topology section, click **Bus members**. The Bus members screen is displayed.

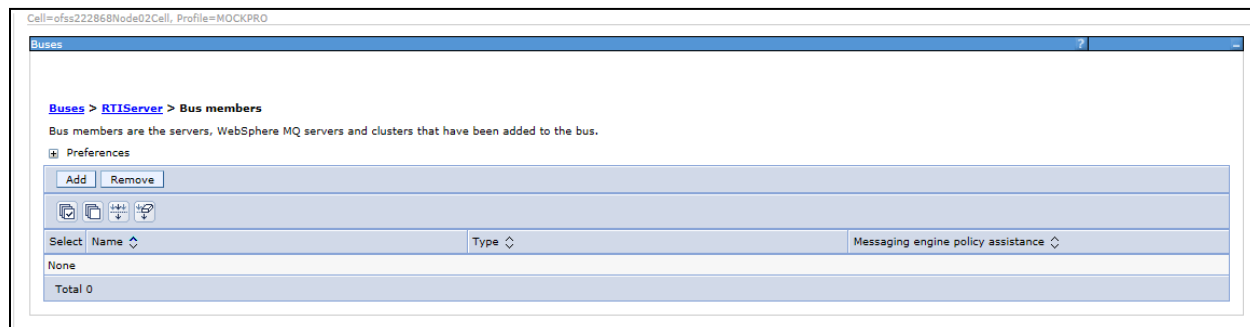


Figure 38: Bus members

- Click **Add**. The Add a New Bus Member screen is displayed.
- Select **Server**.

Configuring IPE in Web Application Servers for Real Time Mode

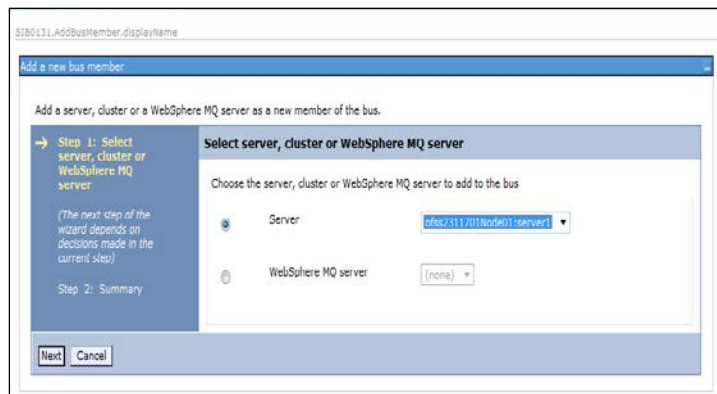



Figure 39: Add a New Bus Member

7. Click Next.



8. Select File Store.

9. Click Next.

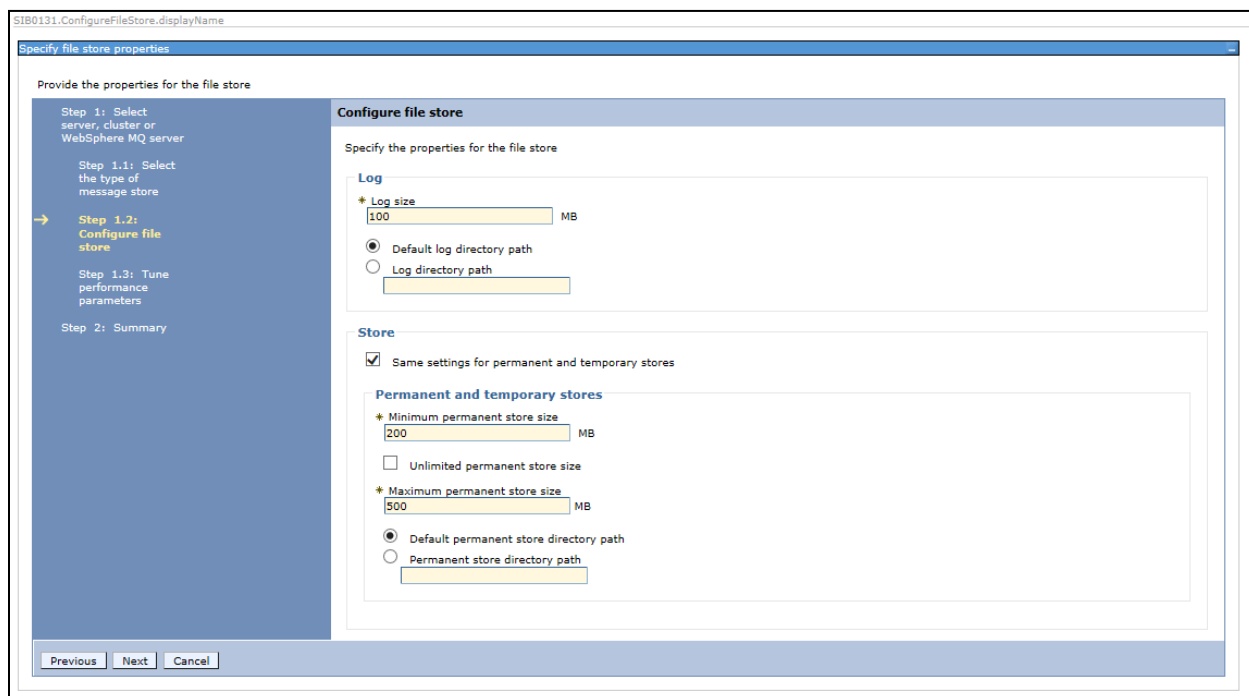

Configuring IPE in Web Application Servers for Real Time Mode

10. Click **Next**.

Step 1: Select server, cluster or WebSphere MQ server

Step 1.1: Select the type of message store

Step 1.2: Configure file store

→ Step 1.3: Tune performance parameters

Step 2: Summary

Tune performance parameters

To improve performance of messaging within the application server, the proposed Java Virtual Machine settings are advised. By default the initial and maximum JVM settings will remain unchanged, select the 'Change heap sizes' checkbox to modify the settings to the proposed values. On machines with low amounts of physical memory size or large numbers of application server instances, it may be necessary to reduce the proposed values accordingly.

Change heap sizes

	Current heap sizes	Proposed heap sizes
Initial JVM heap size	0 MB	768 MB
Maximum JVM heap size	0 MB	768 MB

Previous Next Cancel

11. Click **Next**.

Step 1: Select server, cluster or WebSphere MQ server

Step 1.1: Select the type of message store

Step 1.2: Configure file store

Step 1.3: Tune performance parameters

→ Step 2: Summary

Summary

The actions that will be performed when selecting "Finish".

Adding server "ofss222868Node01:server1" as member of bus "RTIServer".

File store settings:

- Log size "100"
- Log directory path "Using default value"
- Minimum permanent store size "200"
- Maximum permanent store size "500"
- Permanent store directory path "Using default value"
- Minimum temporary store size "200"
- Maximum temporary store size "500"

Previous Finish Cancel

12. Click **Finish**. The Buses screen is displayed.

Buses

Buses > RTIServer > Bus members

Bus members are the servers, WebSphere MQ servers and clusters that have been added to the bus.

Preferences

Add Remove

Select	Name	Type	Messaging engine policy assistance
<input type="checkbox"/>	ofss222868Node01:server1	Server	Not applicable

Total 1

Figure 40: Bus Members created successfully

13. Click **Save**.

3.2.4 Configuring JMS Providers

This section discusses the configuration of JMS providers.

To navigate to JMS Providers sections, follow these steps:

1. Click **+** to expand **Resources**.

Configuring IPE in Web Application Servers for Real Time Mode

2. Click **+** to expand **JMS**.
3. Click **JMS Providers**. The JMS Providers screen is displayed.
4. Select **Cell** as Scope. (for example, Cell=OFSA80Node02Cell)
5. Verify that the Default messaging provider exists.

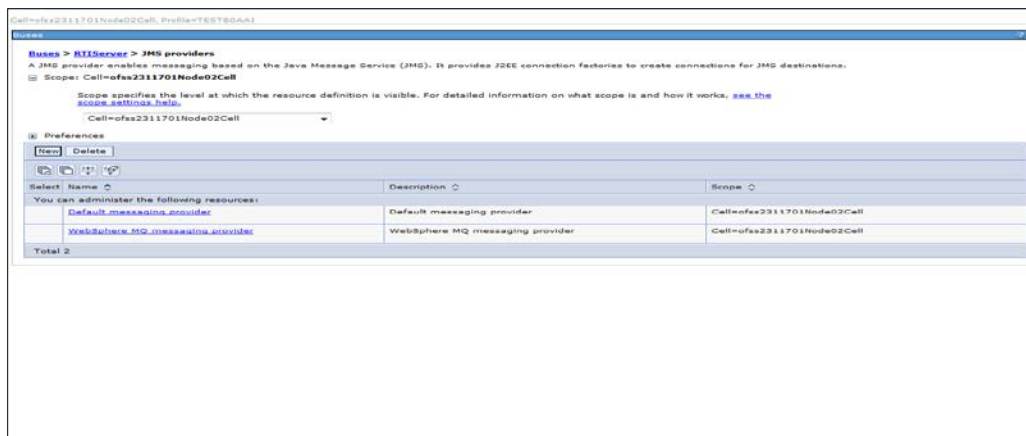


Figure 41: JMS Providers

3.2.5 Configuring JMS Connection Factory

This section explains about configuring JMS Connection Factory.

NOTE: For information about the ports used, refer to section [Check Ports in WebSphere](#).

To configure JMS Connection Factory, follow these steps:

1. Click **+** to expand **Resources**.
2. Click **+** to expand **JMS**.
3. Click **Connection Factories**. The Connection Factories screen is displayed.

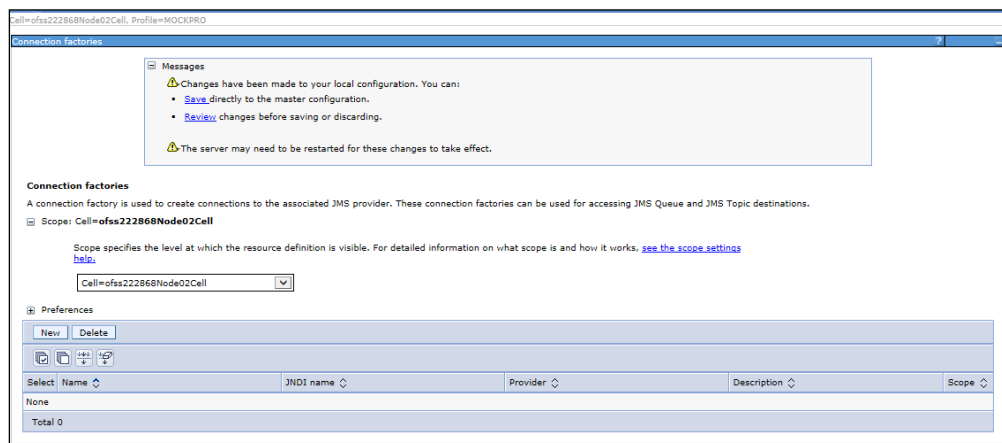


Figure 42: Connection Factories

Configuring IPE in Web Application Servers for Real Time Mode

4. Select the Scope as **Cell**. (for example, Cell=OFSA80Node02Cell)
5. Click **New**.
6. Select Default Messaging Provider option.
7. Click **OK**. The *JMS Connection Factory* screen is displayed.

The screenshot displays the 'JMS Connection Factory' configuration window. At the top, a message box indicates that changes have been made to the local configuration and that the server may need to be restarted. Below this, the 'Connection factories > Default messaging provider > New...' dialog is shown. The main configuration area is divided into several sections:

- General Properties:** Includes fields for Scope (set to 'OFSA80Node02Cell'), Provider (set to 'Default messaging provider'), Name (set to 'JMS Connection Factory'), JMS name (set to 'jmsconnectionfactory'), and Description.
- Connection:** Includes fields for Top name (set to 'RTServer'), Target, Target type (set to 'Queue'), Target member name, Target application (set to 'WebLogic'), Target inbound transport chain, Provider endpoints, and Connection assembly (set to 'Blue').
- Durable Subscription:** Includes fields for Client identifier and Durable subscription name (set to 'OFSA80Node02Server-RTServer').
- Quality of Service:** Includes dropdowns for Nonpersistent message reliability (set to 'Express nonpersistent') and Persistent message reliability (set to 'Reliable permanent').
- Advanced Messaging:** Includes fields for Max #bytes (set to 'Default'), Temporary queue name prefix, Temporary topic name prefix, and Max durable subscriptions (set to 'In cluster').
- Pass message payload by reference:** Includes two checkboxes: 'Applications using this Connection Factory to send messages' (unchecked) and 'Applications using this Connection Factory to receive messages' (unchecked).
- Advanced Administrative:** Includes checkboxes for 'Log missing transaction contexts', 'Manage callout handles', and 'Share data source with CMP'.
- Security settings:** Includes dropdowns for Authentication alias for JA recovery (set to 'None'), Application configuration alias (set to 'None'), and Container-managed authentication alias (set to 'None').

At the bottom of the window, there are 'Apply', 'OK', and 'Cancel' buttons.

Figure 43: JMS Connection Factory

8. Enter the following details:

Configuring IPE in Web Application Servers for Real Time Mode

Table 6: JMS Connection Factory: Field Values

Field	Value	Description
Name	JMS Connection Factory	Enter the name of JMS Connection Factory
JNDI name	jms/connectionFactory	Enter the JNDI name for the JMS connection factory
Bus Name	RTIServer	Select the bus name.
Target Inbound Transport Chain	<Transport Chain Name>	Enter the transport chain name. Refer Appendix C for Transport chain name. For example: <i>InboundBasicMessaging</i>
Provider endpoints	<HOSTNAME> : <SIB_ENDPOINT_ADDRESS port>: <Transport Chain Name>	Enter the transport chain name. Refer Appendix C for Provider endpoints. For example: ofss222868.in.oracle.com:7280:InboundBasic Messaging

Configuring IPE in Web Application Servers for Real Time Mode

The screenshot shows the 'Connection Factories' configuration page. The 'General Properties' section is expanded, showing fields for 'Name', 'JMS Connection Factory', 'JMSI name', and 'Description'. The 'Connection' section is also expanded, showing fields for 'Bus name', 'Target', 'Target type', 'Target significance', 'Target inbound transport chain', 'Provider endpoints', and 'Connection proximity'. The 'Durable Subscription' section is expanded, showing fields for 'Client identifier' and 'Durable subscription name'. The 'Quality of Service' section is expanded, showing dropdowns for 'Nonpersistent message reliability', 'Express nonpersistent', 'Persistent message reliability', and 'Reliable persistent'. The 'Advanced Messaging' section is expanded, showing dropdowns for 'Read ahead', 'Temporary queue name prefix', 'Temporary topic name prefix', and 'Share durable subscriptions'. The 'Pass message payload by reference' section is expanded, showing checkboxes for 'Applications using this Connection Factory to send messages' and 'Applications using this Connection Factory to receive messages'. The 'Advanced Administrative' section is expanded, showing checkboxes for 'Log missing transaction contexts', 'Manage cached handles', and 'Share data source with OMP'. The 'Security settings' section is expanded, showing dropdowns for 'Authentication alias for JA recovery', 'Mapping configuration alias', and 'Configurable-managed authentication alias'. The page also includes 'Additional Properties' and 'Related Items' sections.

Figure 44: JMS Connection Factory – Not default port

9. Click **Apply** and save the details.

3.2.6 Configuring JMS Queues

This section discusses the following JMS Queues which are to be created:

- RTI Source Entity Queue
- RTI Hold JMS Queue

Configuring IPE in Web Application Servers for Real Time Mode

- RTI Feedback Queue
- Wire Transaction Source Entity Queue

3.2.6.1 Configuring RTI Source Entity Queue

To create RTI Source Entity Queue, follow these steps:

1. Click **+** to expand **Resources** in the LHS menu.
2. Click **+** to expand **JMS**.
3. Click **Queues**.

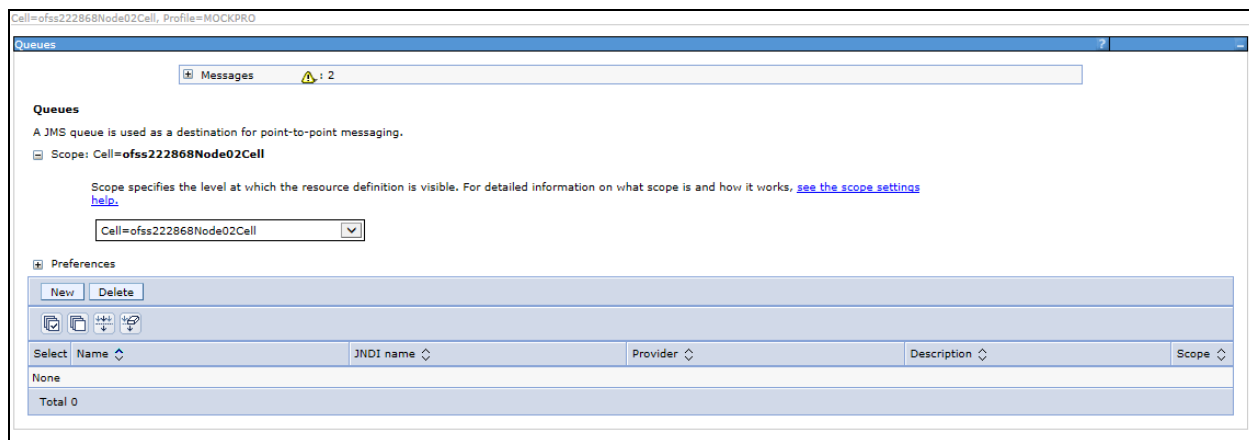


Figure 45: Queues

4. Select Scope as **Cell**. (For example, cell=OFSA80Node02Cell).
5. Click **New**. The *Select JMS resource provider* screen is displayed.

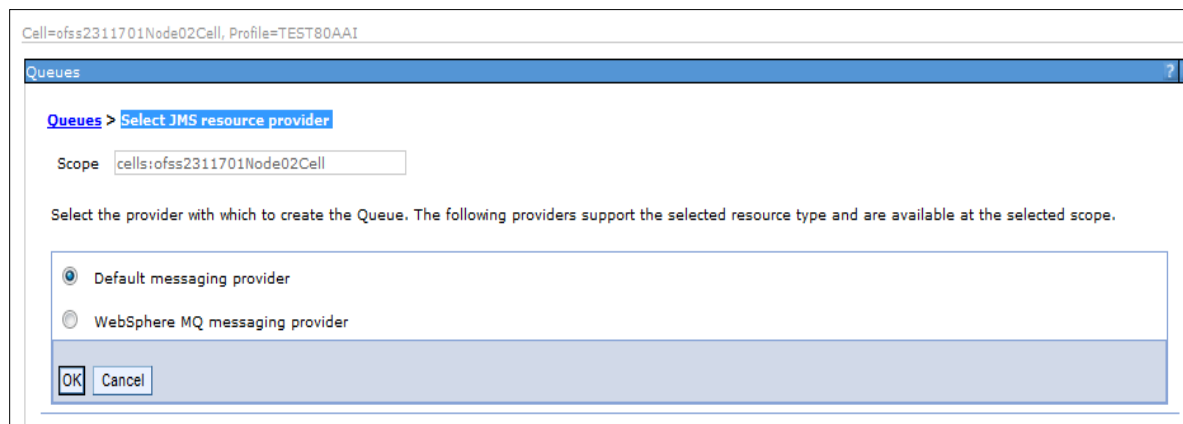


Figure 46: Select JMS resource provider

6. Select Default Messaging Provider.
7. Click **OK**. The General Properties section is displayed.

Configuring IPE in Web Application Servers for Real Time Mode

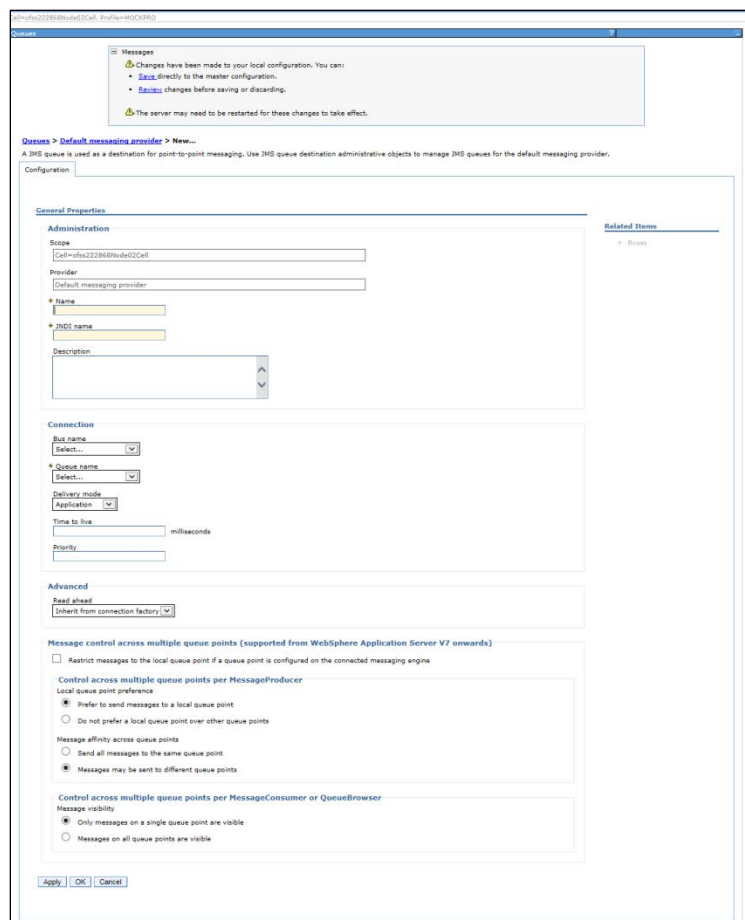


Figure 47: General Properties section

8. Enter the following details:

Table 7: JMS Queues General Properties - Field Values

Field	Value
Name	RTI Source Entity Queue
JNDI Name	jms/sourceEntityQueue
Bus Name	RTIServer

9. Select Create Service Integration Bus destination from Queue Name.

Configuring IPE in Web Application Servers for Real Time Mode

General Properties

Administration

Scope
Cell=ofss2311701Node02Cell

Provider
Default messaging provider

* Name

* JNDI name

Description

Connection

Bus name
RTIServer

* Queue name
Select...
Select...
_SYSTEM.Exception.Destination.ofss2311701Node01.server1-RTIServer
rtiSourceEntityQueue
rtiFeedbackQueue
rtiWireTrxnQueue
Queue1
rtiTransactionActionQueue
Create Service Integration Bus destination
other, please specify

Figure 48: Queue Name

The *Set queue attributes* screen is displayed.

Create new queue

Create a new queue for point-to-point messaging.

→ Step 1: Set queue attributes
Step 2: Assign the queue to a bus member
Step 3: Confirm queue creation

Set queue attributes

Configure the attributes of your new queue

* Identifier
rtiSourceEntityQueue

Description

Next Cancel

Figure 49: Set queue attributes

10. Enter the Identifier as **rtiSourceEntityQueue**.

11. Click **Next**.

Configuring IPE in Web Application Servers for Real Time Mode



Figure 50: Assign the queue to a bus member

12. Click **Next**.

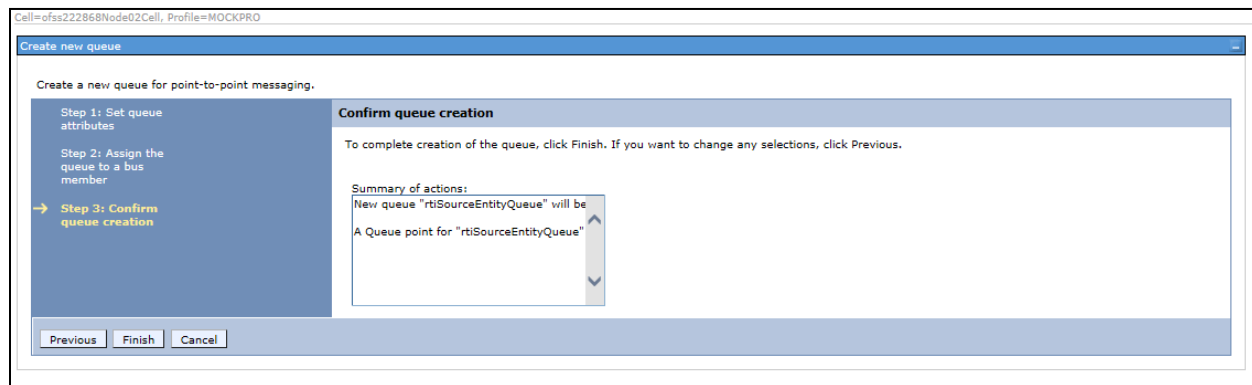


Figure 51: Confirm queue creation

13. Click **Finish**. The Configuration screen is displayed.

Configuring IPE in Web Application Servers for Real Time Mode

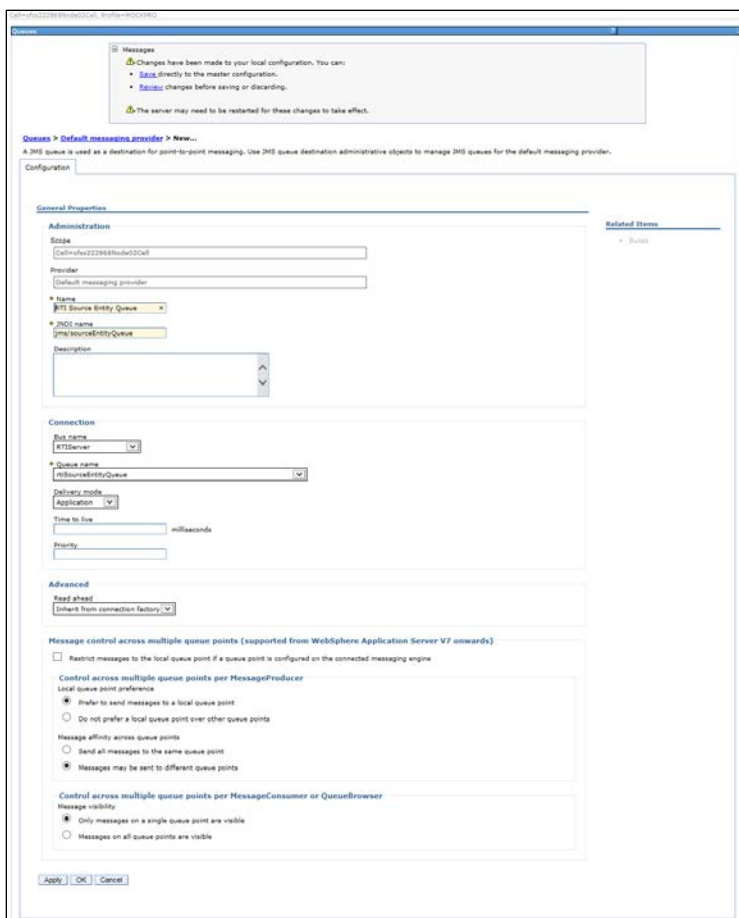


Figure 52: Configuration

14. Click **Apply** and save the details.

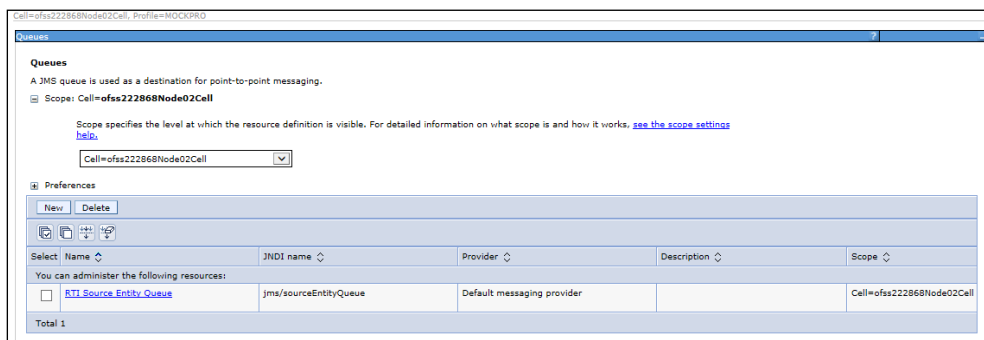


Figure 53: Queues

3.2.6.2 Creating remaining JMS Queues

Similarly, to create the remaining queues, follow these steps:

1. Repeat Steps 1 - 15 from section [RTI Source Entity Queue](#).
2. Enter the following details:

Configuring IPE in Web Application Servers for Real Time Mode

Table 8: WebSphere JMS Queues - Field Values

Queue Name	Fields			
	Name	JNDI name	Bus name	Queue Identifier
RTI Hold JMS Queue	Enter the name as RTI Hold JMS Queue	Enter the JNDI name as jms/TransactionActionQueue	Select the Bus name as RTIServer	Enter the Queue as rtiTransactionActionQueue
RTI Feedback Queue	Enter the name as RTI Feedback Queue	Enter the JNDI name as jms/feedbackQueue	Select the Bus name as RTIServer	Enter the Queue as rtiFeedbackQueue
Wire Transaction Source Entity Queue	Enter the name as Wire Transaction Source Entity	Enter the JNDI name as jms/wireTrxnQueue	Select the Bus name as RTIServer	Enter the Queue as rtiWireTrxnQueue

3. The JMS Queues are created successfully.

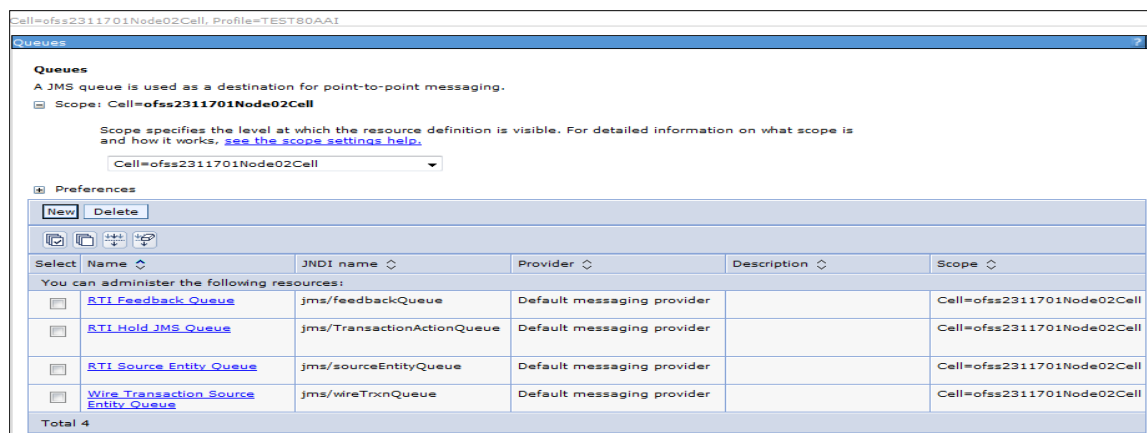


Figure 54: JMS Queue

3.2.7 Configuring JMS Topics

This section discusses the following JMS Topics which are to be created:

- [Creating RTI Cache Operation Message Destination Topic](#)
- [Creating RTI Assessment Response Destination Topic](#)

3.2.7.1 Creating RTI Cache Operation Message Destination Topic

To create JMS topics, follow these steps:

1. Click **+** to expand **Resources** in the LHS menu.
2. Click **+** to expand **JMS**.

Configuring IPE in Web Application Servers for Real Time Mode

3. Click **Topics**.
4. Select Cell as Scope (for example Cell=OFSA80Node02Cell)

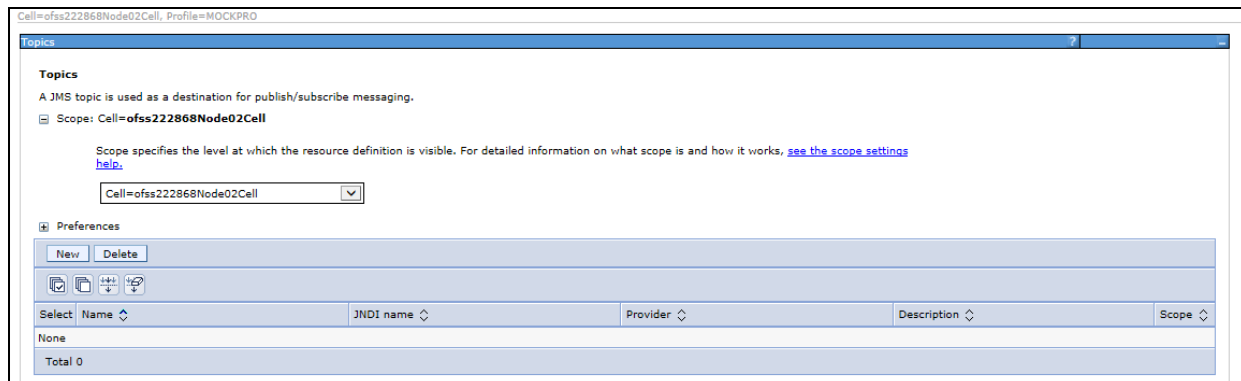


Figure 55: WebSphere - JMS Topics

5. Click **New**. The *Select JMS resource provider* screen is displayed.

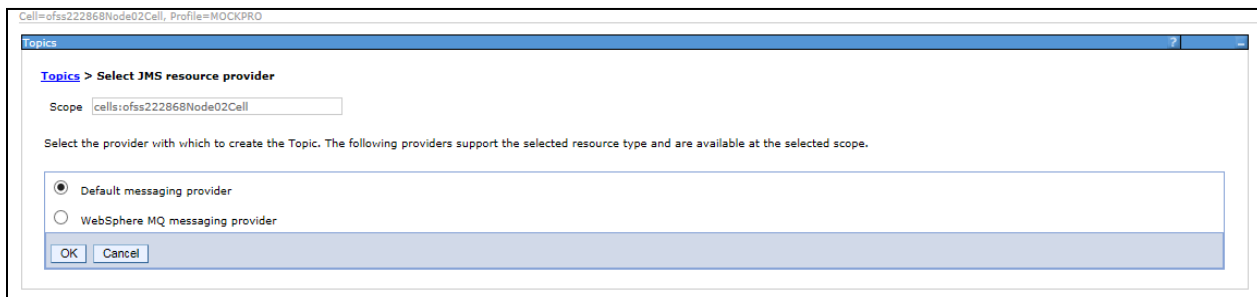


Figure 56: Select JMS resource provider

6. Select Default messaging provider.
7. Click **OK**. The *Configuration* screen is displayed.

Configuring IPE in Web Application Servers for Real Time Mode

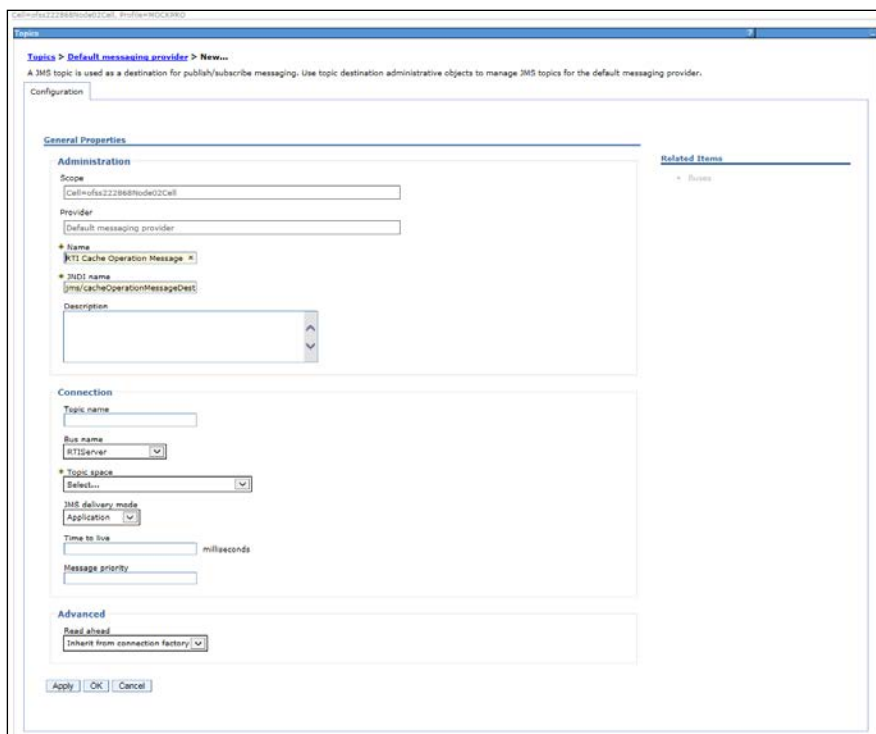


Figure 57: Configuration screen

8. Enter the following details:

Table 9: JMS Topic General Properties - Field Values

Field	Value
Name	RTI Cache Operation Message Destination Topic
JNDI Name	jms/cacheOperationMessageDestination
Bus Name	RTIServer

9. Select Create Service Integration Bus Destination from Topic space.

10. The *Create new topic space* screen is displayed.

Configuring IPE in Web Application Servers for Real Time Mode

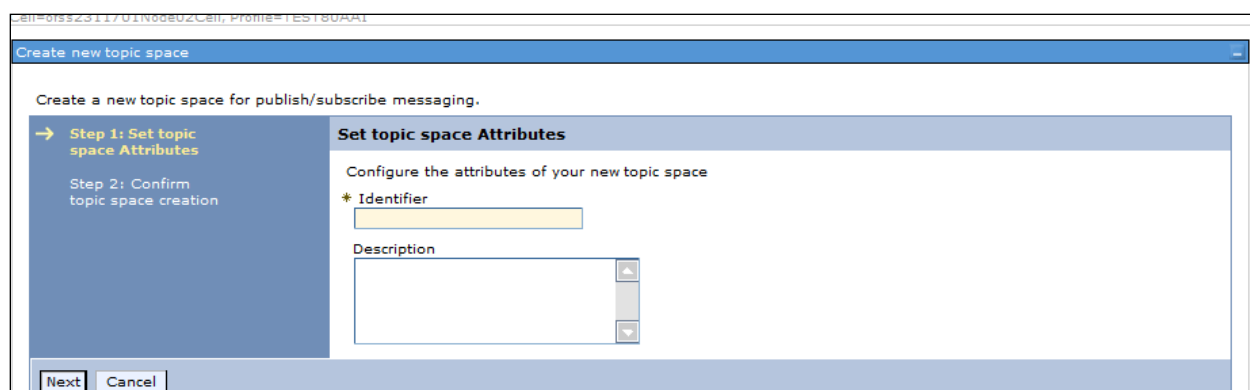


Figure 58: Create new topic space

11. Enter the Identifier as `rtiCacheOperationTopic`.
12. Click **Next**.

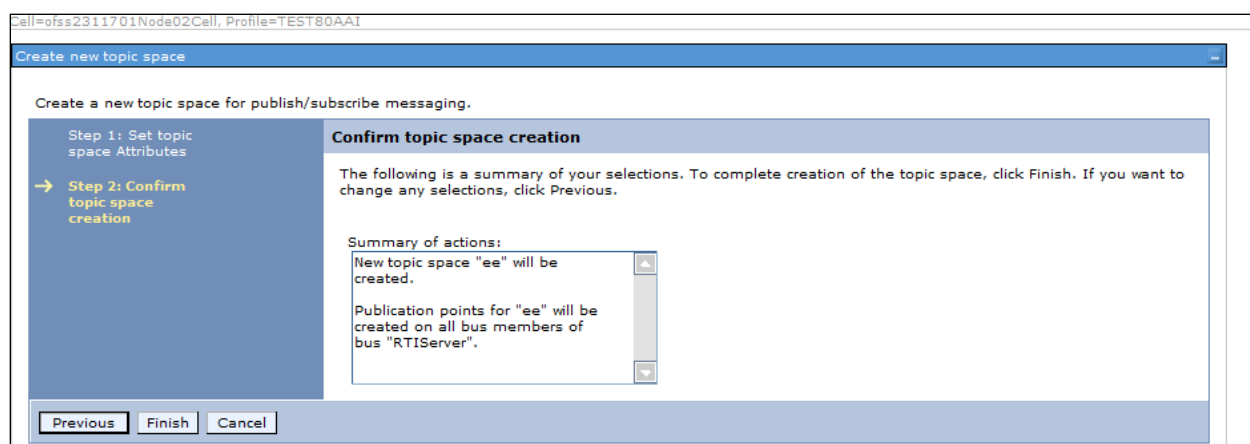


Figure 59: Confirm topic space creation

13. Click **Finish**. The *Configuration* screen is displayed.
14. Click **Apply** and save details.

3.2.7.2 Creating RTI Assessment Response Destination Topic

To create an RTI Assessment Response Destination Topic, follow these steps:

1. Repeat Steps 1-14 from section [RTI Cache Operation Message Destination Topic](#).
2. Enter the following details:

Field	Value
Name	RTI Assessment Response Destination Topic
JNDI name	jms/assessmentResponseDestination
Bus name	RTIServer

Configuring IPE in Web Application Servers for Real Time Mode

Field	Value
Topic Space Identifier	rtiAssessmentResponseDestinationTopic

3.2.8 RMI/IOP Authentication Settings

This section describes the steps for authentication settings. For security setting, follow these steps:

1. Click **+** to expand **Security** in the LHS menu.
2. Click **+** to expand **Global Security**.
3. Click **+** to expand **RMI/IOP security** under **Authentication** section.

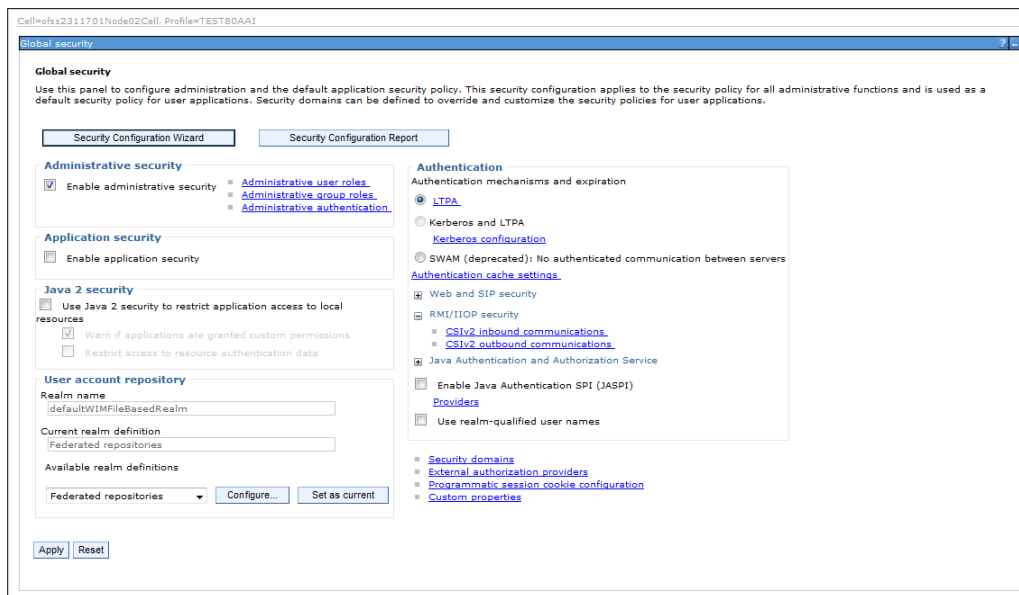


Figure 60: Global Security screen

4. Click CSIV2 inbound communications/CSIV2 outbound communications.
5. Select the following values:

Table 10: RMI/IOP authentication Settings

RMI/IOP Security	Client certificate authentication	Transport
CSIV2 inbound communications	Supported	SSL-supported
CSIV2 outbound communications	Supported	SSL-supported

Configuring IPE in Web Application Servers for Real Time Mode

The screenshot shows the 'Global security' configuration window for 'CSiv2 inbound communications'. The window title is 'Global security' and the breadcrumb is 'Global security > CSiv2 inbound communications'. Below the title, there is a description: 'Use this panel to specify authentication settings for requests that are received and transport settings for connections that are accepted by this server using the Object Management Group (OMG) Common Secure Interoperability (CSI) authentication protocol.' The window is divided into two main sections: 'CSiv2 Attribute Layer' and 'CSiv2 Message Layer'. In the 'CSiv2 Attribute Layer', 'Propagate security attributes' is checked, 'Use identity assertion' is unchecked, and 'Trusted identities' is empty. In the 'CSiv2 Transport Layer', 'Client certificate authentication' is set to 'Supported', and 'Transport' is set to 'SSL-supported'. Under 'SSL settings', 'Centrally managed' is selected, and 'Manage endpoint security configurations' is linked. In the 'CSiv2 Message Layer', 'Message layer authentication' is set to 'Supported', and 'Allow client to server authentication with:' has 'LTPA' and 'Basic authentication' checked. 'Additional Properties' shows 'Login configuration' set to 'RMI_INBOUND' and 'Stateful sessions' checked. 'Related Items' includes a link to 'Trusted authentication realms - inbound'. At the bottom, there are 'Apply', 'OK', 'Reset', and 'Cancel' buttons.

Figure 61: CSiv2 inbound communications

The screenshot shows the 'Global security' configuration window for 'CSiv2 outbound communications'. The window title is 'Global security' and the breadcrumb is 'Global security > CSiv2 outbound communications'. Below the title, there is a description: 'Use this panel to specify authentication settings for requests that are sent and transport settings for connections that are initiated by the server using the Object Management Group (OMG) Common Secure Interoperability (CSI) authentication protocol.' The window is divided into two main sections: 'CSiv2 Attribute Layer' and 'CSiv2 Message Layer'. In the 'CSiv2 Attribute Layer', 'Propagate security attributes' is checked, 'Use identity assertion' is checked, and 'Use server trusted identity' is selected. 'Trusted identity', 'Password', and 'Confirm password' fields are present. In the 'CSiv2 Transport Layer', 'Client certificate authentication' is set to 'Supported', and 'Transport' is set to 'SSL-supported'. Under 'SSL settings', 'Centrally managed' is selected, and 'Manage endpoint security configurations' is linked. In the 'CSiv2 Message Layer', 'Message layer authentication' is set to 'Supported', and 'Allow client to server authentication with:' has 'LTPA' and 'Basic authentication' checked. 'Additional Properties' shows 'Login configuration' set to 'RMI_OUTBOUND', 'Stateful sessions' checked, and 'Enable CSiv2 session cache limit' checked with 'Maximum cache size' set to 100 entries and 'Idle session timeout' set to 900 seconds. 'Custom outbound mapping' is unchecked. At the bottom, there are 'Apply', 'OK', 'Reset', and 'Cancel' buttons.

Figure 62: CSiv2 outbound communications

6. Click **Apply** and save details.

Note: RMI/IIOP Authentication Settings are not required for WebLogic.

3.2.9 Restart WebSphere Profile

For more information, refer to the Start/Stop Infrastructure Services section in the Oracle Financial Services Analytical Applications Infrastructure Installation and Configuration Guide available on the [OHC](#) page.

3.3 Configuring IPE in Tomcat

This section provides details for configuring IPE in Tomcat and includes the following topics:

- [Prerequisites](#)
- [Configuring Tomcat](#)

3.3.1 Prerequisites

The following are the prerequisites for Tomcat configuration:

- Before deployment, make required changes in App layer.

3.3.2 Configuring Tomcat

Perform the following procedure to configure Tomcat:

1. Create the datasource for ILP context in Tomcat by editing the `server.xml` file in the `<TOMCAT_HOME_DIR>/conf` directory.

Note: The following example is a sample configuration. Update your database details accordingly. Make sure the context name matches the directory name under webapps. In the following example, ILP is the context name.

```
<Context path="/ILP" docBase="/scratch/ofsaobie/apache-tomcat-8.0.21/webapps/ILP" debug="0" reloadable="false" crossContext="true">
  <Loader delegate="true"/>
  <Resource auth="Container"
    name="jdbc/FICMASTER"
    type="javax.sql.DataSource"
    driverClassName="oracle.jdbc.driver.OracleDriver"
    username="act_obiconf"
    password="password"

    url="jdbc:oracle:thin:@whf00aqr:1521/DEVUT08SPRINT"
    maxTotal="100"
    maxIdle="30"
    maxWaitMillis="10000" removeAbandoned="true"
    removeAbandonedTimeout="60" logAbandoned="true"/>
  <Resource auth="Container"
    name="jdbc/OFSAAAIINFO"
    type="javax.sql.DataSource"
    driverClassName="oracle.jdbc.driver.OracleDriver"
    username="act_obiadm"
    password="password"

    url="jdbc:oracle:thin:@whf00aqr:1521/DEVUT08SPRINT"
    maxTotal="100"
    maxIdle="30"
```

Configuring IPE in Web Application Servers for Real Time Mode

```
        maxWaitMillis="10000" removeAbandoned="true"
removeAbandonedTimeout="60" logAbandoned="true"/>
    <Resource auth="Container"
        name="jdbc/OFSAAAIINFOCNF"
        type="javax.sql.DataSource"
        driverClassName="oracle.jdbc.driver.OracleDriver"
        username="act_obiadm"
        password="password"

url="jdbc:oracle:thin:@whf00agr:1521/DEVUT08SPRINT"
        maxTotal="100"
        maxIdle="30"
        maxWaitMillis="10000" removeAbandoned="true"
removeAbandonedTimeout="60" logAbandoned="true"/>

</Context>
```

2. Update the following parameters in the `install.properties` file in the `$(FIC_HOME)/ILP/conf` directory:

```
sql.config.datasource.jndi.name=java:comp/env/jdbc/FICMASTER
sql.atomic.datasource.jndi.name=java:comp/env/jdbc/<RTI_INFODOM>
sql.metadom.datasource.jndi.name=java:comp/env/jdbc/<RTI_INFODOM>CNF
```

Note: Name should match the Resource Name defined in the `server.xml` file.

3. Update the `application-env.properties` file in `$(FIC_HOME)/ILP/conf` directory after commenting out the parameter

```
spring.profiles.active=JMS,JMSApplicationCache,JMSGateway,JMSFeedBackGateway
```

and adding

```
spring.profiles.active=
```

Note: The following is an example and the changes shown will remove the JMS dependencies for IPE.

```
#
# The spring profiles to activate. The list of available profiles
# are:
# 1. JMS - To activate the use of JMS infrastructure. This is
# required for
# activating any other JMS profile
# 2. JMSGateway - To activate JMS interface for receiving source
# entities
```

Configuring IPE in Web Application Servers for Real Time Mode

- ```
3. JMSApplicationCache - To activate JMS for receiving cache
 refresh messages
4. JMSFeedBackGateway - To activate the Feedback message from APPS
 like FCCM in JMS
#
#spring.profiles.active=JMS,JMSApplicationCache,JMSGateway,JMSFeedBa
 ckGateway
spring.profiles.active=
```
4. Copy the following jars from the `FIC_HOME/realtime_processing/additionaljars/tomcat` directory to the `fichome/realtime_processing/WEB-INF/lib` directory:
    1. `jms-api-1.1-rev-1.jar`
    2. `javax.ws.rs-api-2.0.1.jar`
  5. Execute the `ant.sh` script to create `ilp.ear` and `ilp.war` files from the `fichome/realtime_processing` directory.
  6. Copy the `ilp.war` file to the `TOMCAT_HOME/webapps` directory (not required to explode).
  7. Restart the Tomcat server.

### 3.4 Configuring IPE in Kafka

This section provides details for configuring IPE in Kafka and includes the following topics:

#### 3.4.1 Prerequisites

The following are the prerequisites for Kafka configuration:

- Before deployment, make required changes in App layer.

#### 3.4.2 Configuring Kafka

Perform the following procedure to configure Kafka:

1. Create the datasource for ILP context in Tomcat by editing the `server.xml` file in the `<TOMCAT_HOME_DIR>/conf` directory.

**Note:** The following example is a sample configuration. Update your database details accordingly. Make sure the context name matches the directory name under `webapps`. In the following example, ILP is the context name.

```
<Context path="/ILP" docBase="/scratch/ofsaobie/apache-tomcat-
8.0.21/webapps/ILP" debug="0" reloadable="false"
crossContext="true">
 <Loader delegate="true"/>
 <Resource auth="Container"
```

## Configuring IPE in Web Application Servers for Real Time Mode

---

```
 name="jdbc/FICMASTER"
 type="javax.sql.DataSource"
 driverClassName="oracle.jdbc.driver.OracleDriver"
 username="act_obiconf"
 password="password"

url="jdbc:oracle:thin:@whf00aqr:1521/DEVUT08SPRINT"
 maxTotal="100"
 maxIdle="30"
 maxWaitMillis="10000" removeAbandoned="true"
removeAbandonedTimeout="60" logAbandoned="true"/>
 <Resource auth="Container"
 name="jdbc/OFSAAAIINFO"
 type="javax.sql.DataSource"
 driverClassName="oracle.jdbc.driver.OracleDriver"
 username="act_obiatm"
 password="password"

url="jdbc:oracle:thin:@whf00aqr:1521/DEVUT08SPRINT"
 maxTotal="100"
 maxIdle="30"
 maxWaitMillis="10000" removeAbandoned="true"
removeAbandonedTimeout="60" logAbandoned="true"/>
 <Resource auth="Container"
 name="jdbc/OFSAAAIINFOCNF"
 type="javax.sql.DataSource"
 driverClassName="oracle.jdbc.driver.OracleDriver"
 username="act_obiatm"
 password="password"

url="jdbc:oracle:thin:@whf00aqr:1521/DEVUT08SPRINT"
 maxTotal="100"
 maxIdle="30"
 maxWaitMillis="10000" removeAbandoned="true"
removeAbandonedTimeout="60" logAbandoned="true"/>

</Context>
```

2. Update the following parameters in the `install.properties` file in the `fichome/realtime_processing/conf` directory:

```
sql.config.datasource.jndi.name=java:comp/env/jdbc/FICMASTER
sql.atomic.datasource.jndi.name=java:comp/env/jdbc/<RTI_INFODOM>
```

## Configuring IPE in Web Application Servers for Real Time Mode

---

```
sql.metadom.datasource.jndi.name=java:comp/env/jdbc/<RTI_INFODOM>CNF
```

**Note:** Name should match the Resource Name defined in the `server.xml` file.

3. Update the `$TOMCAT_HOME/webapps/ILP/conf/install.properties` file for kafka broker details, the inbound topic names, and outbound topic names as shown in the following example:

```
kafka.bootstrap.servers=whf00act.in.oracle.com:9092
kafka.inbound.topic.group.id=IPE
kafka.inbound.topic=IPERT.t
kafka.outbound.topic=IPERESPONSE.t
kafka.consumer.num=5
kafka.inbound.partitions=10
kafka.inbound.poll.timeout=3000
```

4. Update the `application-env.properties` file in `$TOMCAT_HOME/webapps/ILP/conf` directory after commenting out the parameter

```
spring.profiles.active=JMS,JMSApplicationCache,JMSGateway,JMSFeedBackGateway
```

and adding

```
spring.profiles.active=IPEKAFKA
```

**Note:** The preceding example changes will remove the JMS dependencies for IPE and enable Kafka.

5. Update the `web.xml` file in the `$TOMCAT_HOME/webapps/ILP/WEB-INF` directory (append the `/conf/applicationContext-kafka.xml` file in the end under **param contextConfigLocation**).

```
/conf/applicationContext.xml,/conf/applicationContext-
jms.xml,/conf/applicationContext-
jmx.xml,/conf/ext/spring*.xml,/conf/applicationContext-kafka.xml
```

6. Copy the following jars from the `fichome/realtime_processing/additionaljars` directory to the `fichome/realtime_processing/WEB-INF/lib` directory:

7. `spring-messaging-4.2.3.RELEASE.jar`
  3. `spring-kafka-1.2.0.RELEASE.jar`
  4. `spring-integration-kafka-2.0.1.RELEASE.jar`
  5. `kafka-clients-0.11.0.0.jar`
  6. `slf4j-log4j12-1.4.3.jar`
  7. `slf4j-api-1.4.3.jar`
  8. `jms-api-1.1-rev-1.jar`



## Configuring IPE in Web Application Servers for Real Time Mode

---

9. `javax.ws.rs-api-2.0.1.jar`
8. Update the following in the `server.properties` file under `config` directory:  

```
num.partitions=200
auto.create.topics.enable=true
```
9. Execute the `ant.sh` script to create `ilp.ear` and `ilp.war` files from the `fichome/realtime_processing` directory.
10. Copy the `ilp.war` file to the `TOMCAT_HOME/webapps` directory.
11. Restart the Tomcat server to deploy `ilp.war`.

### 3.4.3 Testing Kafka Configuration

---

**NOTE:** The examples shown in this section display port number, URL, and request for illustrative purposes only. You must enter the correct values for the port number, URL and request as it exists in your application.

---

Perform the following procedure to test the Kafka configuration:

1. Use the following command to stop all Tomcat servers:

```
ss -tanp | grep 9092
Output: LISTEN 0 50 :::9092
 :::* users:(("java",31114,554))
ps -eaf | grep 31114
kill -9 31114
```

**Note:** 9092 is the port number of the URL.

2. Use the following command to stop all Kafka servers:

```
ps -eaf | grep kafka
```

**Note:** Ctrl+C will actually kills all kafka related process.

3. Open four putty sessions, one each for zookeeper, server, producer and consumer. Enter the following commands in the respective sessions after changing the path to kafka:

Zookeeper session: `bin/zookeeper-server-start.sh`

`config/zookeeper.properties`

Server session: `bin/kafka-server-start.sh config/server.properties`

Producer session: `bin/kafka-console-producer.sh --broker-list`

`whf00bfk.in.oracle.com:9092 --topic IPERT.t`

Consumer session: `bin/kafka-console-consumer.sh --bootstrap-server`

`whf00bfk.in.oracle.com:9092 --topic IPERESPONSE.t`

## Configuring IPE in Web Application Servers for Real Time Mode

---

4. Start Tomcat.

5. Enter the following request in the producer window in a single line:

```
"eg: { "type" : "DIM_ACCOUNT", "domain" : "FRA", "appId"
 : "OFS_IPE", "runtype" : 1, "runParam" : 1, "attributes" :
 { "Account Skey" : "500", "Account Description" : "ASD"
 }, "additionalParams" : { } }
"
```

6. Check for the results in the Consumer window.

7. Check for results in **rti\_eval\_assmnt\_result** and **rti\_assmnt\_result**.

## 4 Post data in JSON format to IPE

JSON requests are posted through REST services in IPE Realtime Mode. The subsections in this topic provides information on how to post data in JSON format using HTTP requests and receive responses from the server.

### 4.1 Prerequisites

The following are the prerequisites to post JSON requests in IPE:

1. Install a JSON client on your local computer.
2. User access for authentication on the server.
3. Knowledge about posting JSON requests.

### 4.2 Posting JSON request for REST services

The following is the procedure to post JSON requests for REST services:

1. Open the JSON client.
2. Select or enter Method as **POST**.
3. Enter the server URL in **Request URL**.
4. Enter the Header parameters as shown in the following table:

**Table 11: JSON Request Header Parameters**

No.	Header Name	Header Value	Description
1	username	Enter the user name to login to the server.	This value is used for user authentication.
2	password	Enter the password to login to the server.	This value is used for user authentication.
3	content-type	Select or enter application/json.	This value denotes that the data in JSON format.
4	accept	Select or enter application/json.	This value denotes that the data in JSON format

5. Select **application/json** for **Body content type**.
6. Enter the JSON message in the body. The following code sample is an example:

```
{
 "type": "DIM_ACCOUNT",
```

```
"domain": "FRA",
"appId": "OFS_IPE",
"runtype": 1,
"runParam": 1,
"attributes": {
 "Account Skey": 181,
 "Account Description": "ABC"
},
"additionalParams": {}
}
```

The following is the convention for the data in the fields of the preceding code sample:

```
{
 "type": <ACTIVITY Table>,
 "domain": <Processing Segment>,
 "appId": <Product ID>,
 "runtype": 1,
 "runParam": 1,
 "attributes":
 {
 <Required attributes/Business Column names of activity table>:
 <Values>
 },
 "additionalParams": {}
}
```

7. Send the JSON message from the client to the server. The server provides a response message with values for successful posting or for errors, if any.

## 5 Additional Configuration

To use IPE framework without a Sample Application, perform the following additional configuration.

### 5.1 Updating Install Properties

To update the install properties, follow these steps:

1. Login to the UNIX machine where the OFS AAAI Application Pack is installed with IPE enabled.
2. Navigate to <OFSAA Installation Directory>/realtime\_processing/WebContent/conf.
3. Edit `install.properties` and provide the following information:

**Table 12: Additional configuration for without sample application**

Parameter Code	Value	Description
<RTI_INFODOM>	< Infodom Name >	Infodom Name used for IPE For example, OFSAAIINFO
<RTI_SEGMENT>	< default IPE processing segment code >	Enter the default IPE Processing Segment Code. For example, FRA

#### 5.1.1 Updating `install.properties` to enable Highlights in Real-Time

The following is an example of the `install.properties` file with Highlights in Real-Time disabled. To enable, set the parameter `ipe.produce.hglights.results=false` to `ipe.produce.hglights.results=true` in the file.

```
sql.config.datasource.jndi.name=jdbc/FICMASTER
sql.atomic.datasource.jndi.name=jdbc/OFSAAIINFO
sql.metadom.datasource.jndi.name=jdbc/OFSAAIINFOCNF
system.infodom=OFSAAIINFO
system.domain=FRA
system.appid=OFS_IPE
```

```

deployment.assessment.execution.mode=LIVE
deployment.datastore=RDBMS
deployment.test.java.naming.initial.context.factory=
deployment.test.java.naming.provider.url=
batch.audit.backup=true
ipe.persist.eval.results=false
process.maxalert.count=100
action.json.constant=200
action.json.response.url=
aai.auth.url=
kafka.bootstrap.servers=
kafka.inbound.topic.group.id=IPE
kafka.inbound.topic=IPERT.t
kafka.outbound.topic=IPERESPONSE.t
ipe.produce.hglights.results=false
kafka.consumer.num=5
kafka.inbound.partitions=10
kafka.inbound.poll.timeout=3000

```

### 5.1.2 IPE Caching

To perform caching in IPE, follow these steps:

1. Connect to OFSAA Configuration schema.
2. Replace the placeholders with the following information in the update queries.
3. Run the update queries.

Parameter Code	Value	Description
<INITIALFACTORY>	< initial context for app server>	Initial Context for the Web Application Server  <b>Websphere:</b> com.ibm.websphere.naming.WsnInitialContext

		<p>Factory</p> <p><b>Weblogic:</b></p> <p>weblogic.jndi.WLInitialContextFactory</p>
<PROVIDER_URL>	<processing URL>	<p>URL for accessing Queues and Topics in Web Application server. For more information, refer to <a href="#">Appendix A</a>.</p>

- Update configuration c set c.PARAMVALUE= '<INITIALFACTORY>' where c.paramname = 'RTI\_PROCESSING\_INITIALCONTEXTFACTORY'  
/  
Update configuration c set c.PARAMVALUE= '<PROVIDER\_URL>' where c.paramname = 'RTI\_PROCESSING\_PROVIDER\_URL'  
/

## 5.2 Creating ILP.ear/ ILP.war

It is mandatory to have the ILP.ear in the same profile or domain where the <contextname>.ear file of the OFS AAAI Application is deployed. To create ILP.ear/ ILP.war, follow these steps:

- Navigate to <OFSAA Installation Directory >/realtime\_processing.
- Execute the command:

```
./ant.sh.
```

```

/scratch/ofsaobie/AAAI_80/realtime_processing>ls
ant.sh application.xml build.xml ILP.ear ILP.war ipesampleapp WebContent
/scratch/ofsaobie/AAAI_80/realtime_processing>./ant.sh
executing "ant"
Buildfile: build.xml

createwar:

createear:

BUILD SUCCESSFUL
Total time: 0 seconds
/scratch/ofsaobie/AAAI_80/realtime_processing>

```

- On successful execution, the ILP.ear and ILP.war files are generated under the <OFSAA Installation Directory >/realtime\_processing folder.

---

## 5.3 Deploying ILP.ear in Weblogic

This section defines how to deploy ILP.ear in Weblogic.

---

**NOTE:** It is mandatory to have ILP.ear in the same domain where <contextname>.ear of the OFS AAI Application is deployed.

**NOTE:** Do not deploy ilp.ear on Sanctions TFLT, the installation will fail.

---

To deploy ILP.ear in Weblogic, follow these steps:

1. Start the Weblogic server.
2. Create an ILP.ear folder in  
<WEBLOGIC\_INSTALL\_DIR>/user\_projects/domains/<DOMAIN\_NAME>/applications  
Copy <FIC\_HOME>/realtime\_processing/ILP.ear to  
<WEBLOGIC\_INSTALL\_DIR>/user\_projects/domains/<DOMAIN\_NAME>/application  
s/ILP.ear/.
3. Explode the ILP.ear file by executing the command:  

```
jar -xvf ILP.ear
```
4. Delete the ILP.ear and IPL.war files.
5. Create an ILP.war folder in  
<WEBLOGIC\_INSTALL\_DIR>/user\_projects/domains/<DOMAIN\_NAME>/applications/ILP.  
ear  
Copy <FIC\_HOME>/realtime\_processing/ILP.war to  
<WEBLOGIC\_INSTALL\_DIR>/user\_projects/domains/<DOMAIN\_NAME>/applica  
tions/ILP.ear/ILP.war
6. Explode the ILP.war file by executing the command:  

```
jar -xvf ILP.war.
```
7. Delete the ILP.war file.


### 5.3.1 Installing ILP.ear in WebLogic using WebLogic Administrator Console.

1. Navigate to the path  
<WEBLOGIC\_INSTALL\_DIR>/user\_projects/domains/<DOMAIN\_NAME>/bin in the  
machine in which WebLogic is installed.
2. Start WebLogic by executing the command:  


```
./startWebLogic.sh -d64 file
```




- Open the following URL in the browser window: `http://<ipaddress>:<administrative console port>/console`. (Use https protocol if SSL is enabled). The *Welcome* window is displayed.
- Login with the Administrator **Username** and **Password**. The Summary of Deployment page is displayed.

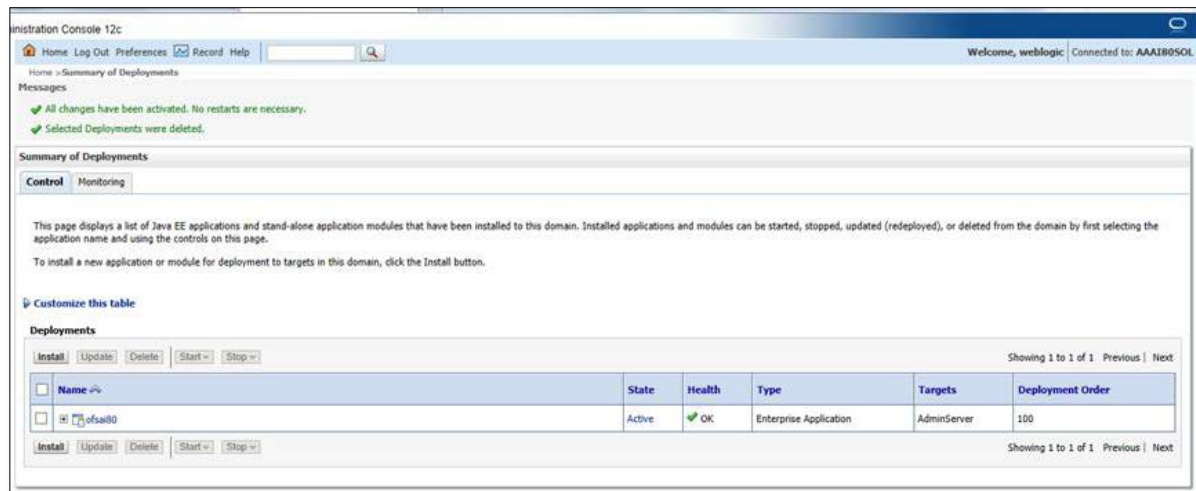


- Click **Install**. The Install Application Assistance page is displayed.

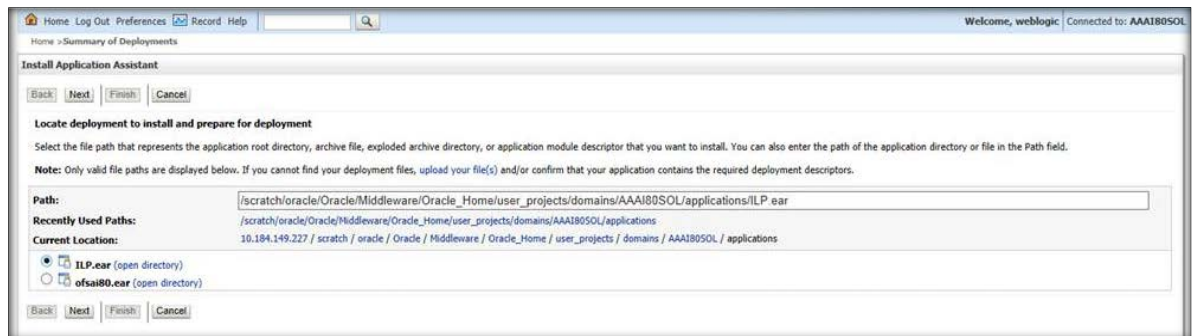


- Select **ILP.ear** and click **Next**. The Install Application Assistance page is displayed with the Choose targeting style section.

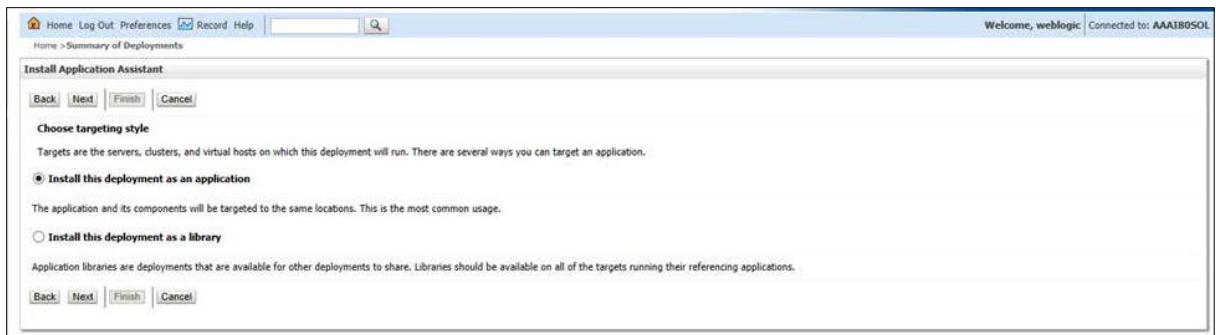


7. By default, the **Install this deployment as an application** option in the Choose targeting style section is selected. Click **Next**. The Install Application Assistance page is displayed with the Optional Settings section.

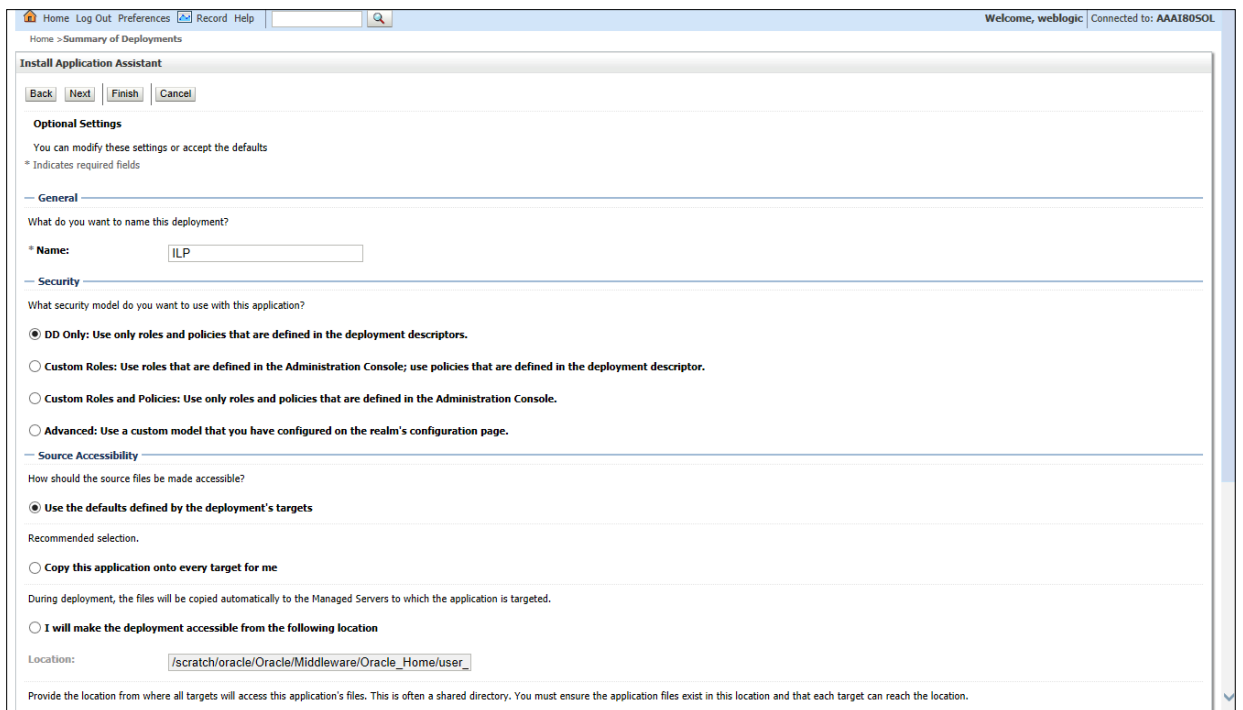

8. Retain the default selections and click **Next**. The Install Application Assistance page is displayed with the Review your choices and click Finish section.

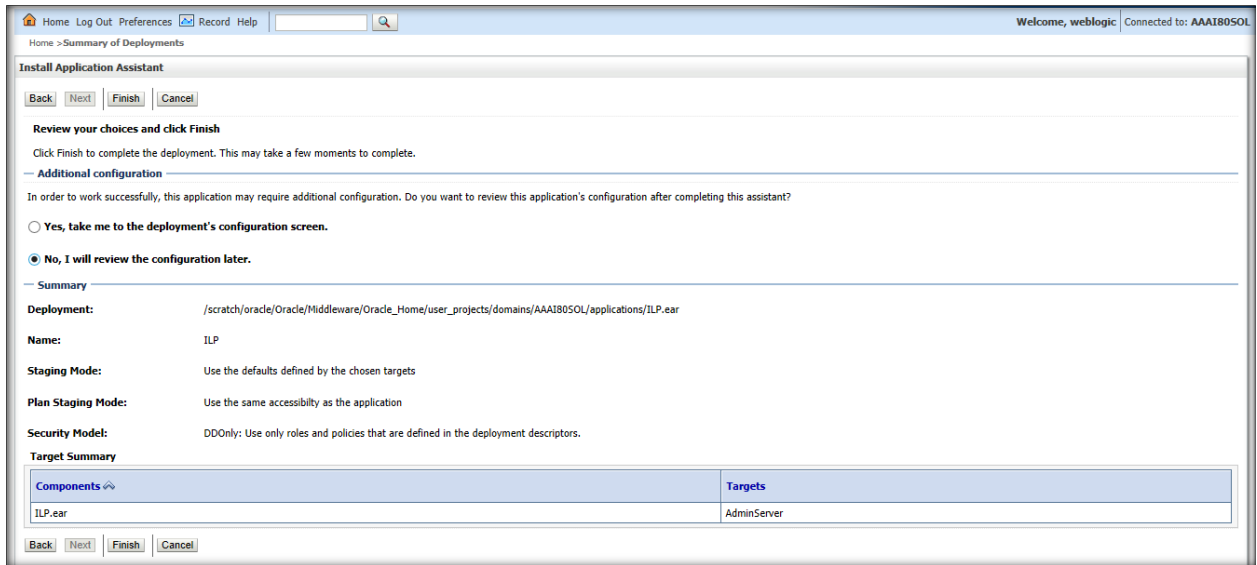

9. Select **No, I will review the configuration later** in the Additional Configuration section and click **Finish**. ILP is added in the Name section of the Summary of Deployment page with following message: *The deployment has been successfully installed.*

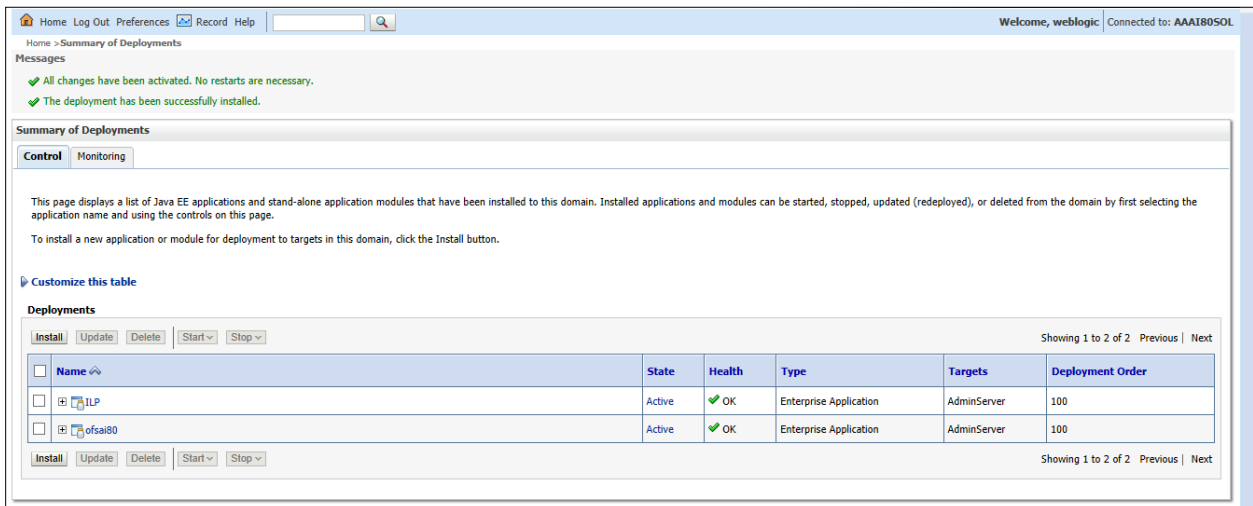

10. Restart all OFS AAAI servers. For more information, refer to the Start/Stop Infrastructure Services section in the Oracle Financial Services Analytical Applications Infrastructure Installation and Configuration Guide available on the [OHC](#) page.

## 5.3.2 Deploying ILP.ear in WebSphere

To deploy ILP.ear in WebSphere, follow these steps:


**NOTE:** It is mandatory to have ILP.ear in the same profile where <contextname>.ear of OFS AAAI Application is deployed.

**NOTE:** Do not deploy **ilp.ear** on Sanctions TFLT, the installation will fail.


---

1. Start the WebSphere Profile by navigating to the path  
"/<WebSphere\_Installation\_Directory>/IBM/WebSphere/AppServer/profiles/<Profile\_Name>/bin/" then execute the command:  


```
./startServer.sh server1
```
2. Open the following URL in the browser: `http://<ipaddress>:<Administrative Console Port>/ibm/console`. (use https protocol if SSL is enabled). The login screen is displayed.

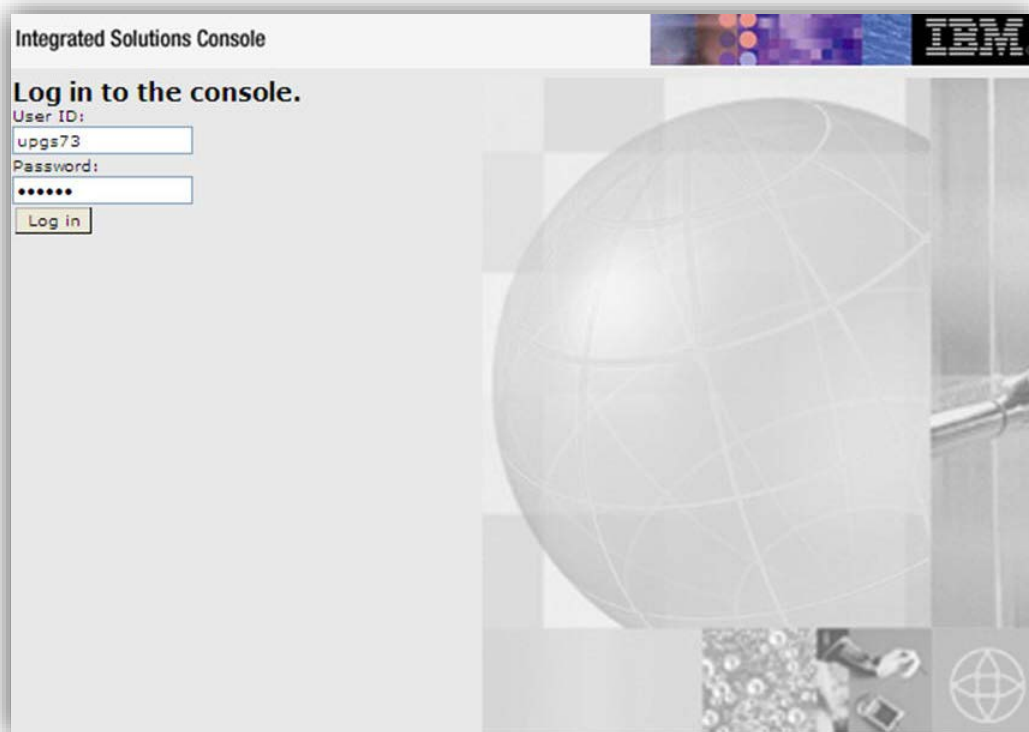


3. Enter the user credentials which have administrator rights and click **Log In**.
4. From the LHS menu, select **Applications** and click **New Application**. The New Application window is displayed.

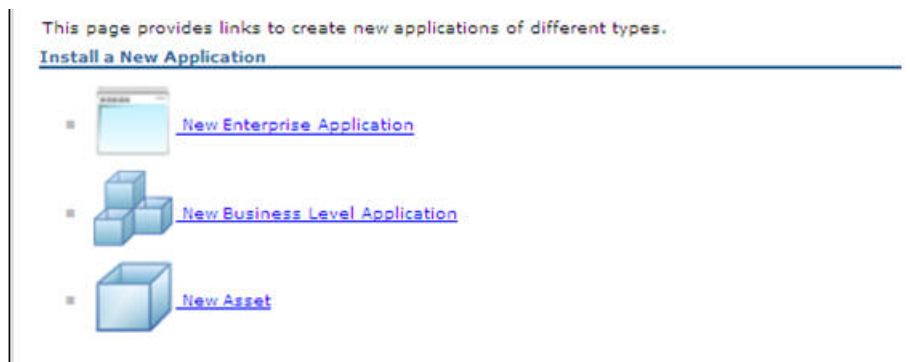

5. Click **New Enterprise Application**. The *Preparing for the application installation* page is displayed.

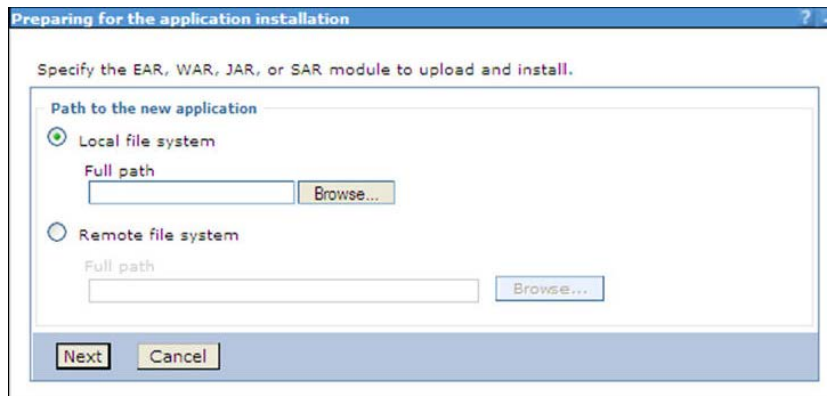

6. Select **Remote File System** and click **Browse**. Select the EAR file generated for IPE to upload and install. Click **Next**.

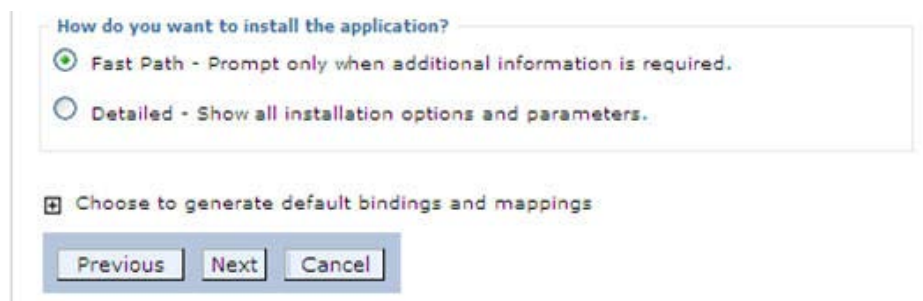


7. Select the **Fast Path** option and click **Next**. The *Install New Application* window is displayed.


8. Click **Next**. The *Map Modules to Servers* page is displayed.

Select	Module	URI	Server
<input checked="" type="checkbox"/>	Inline Processing	ILP.war,WEB-INF/web.xml	WebSphere:cell=ofss2311701Node02Cell,node=ofss2311701Node02,server=server1


9. Select the **Inline Processing** checkbox and click **Next**. The *Map Virtual hosts for Web modules* page is displayed.

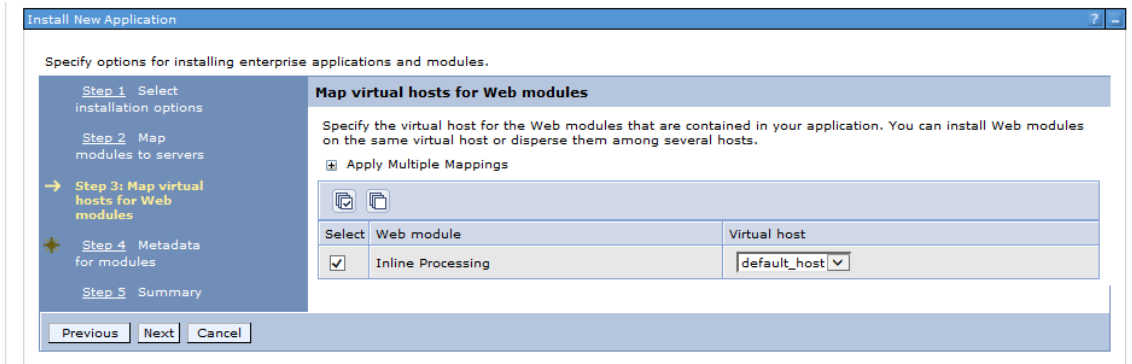


10. Select the **Inline Processing** checkbox and click **Next**. The Metadata for modules page is displayed.

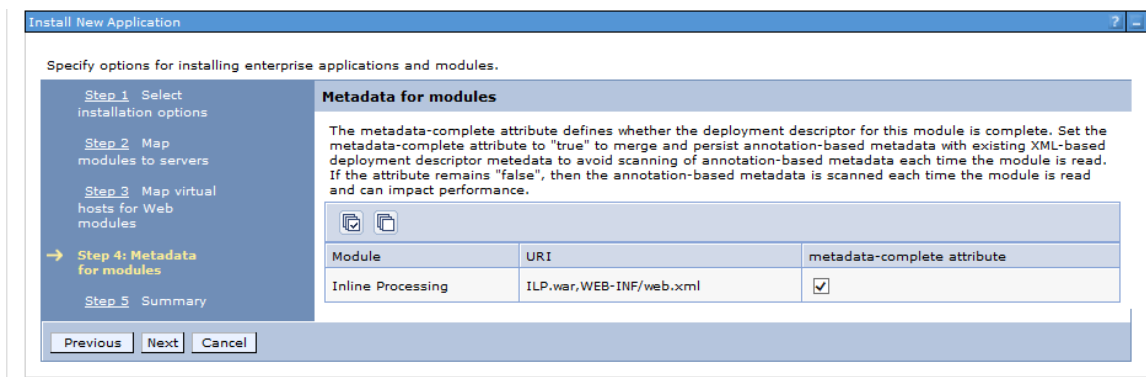

11. Select the **Metadata-complete** attribute checkbox and click **Next**. The Summary page is displayed.

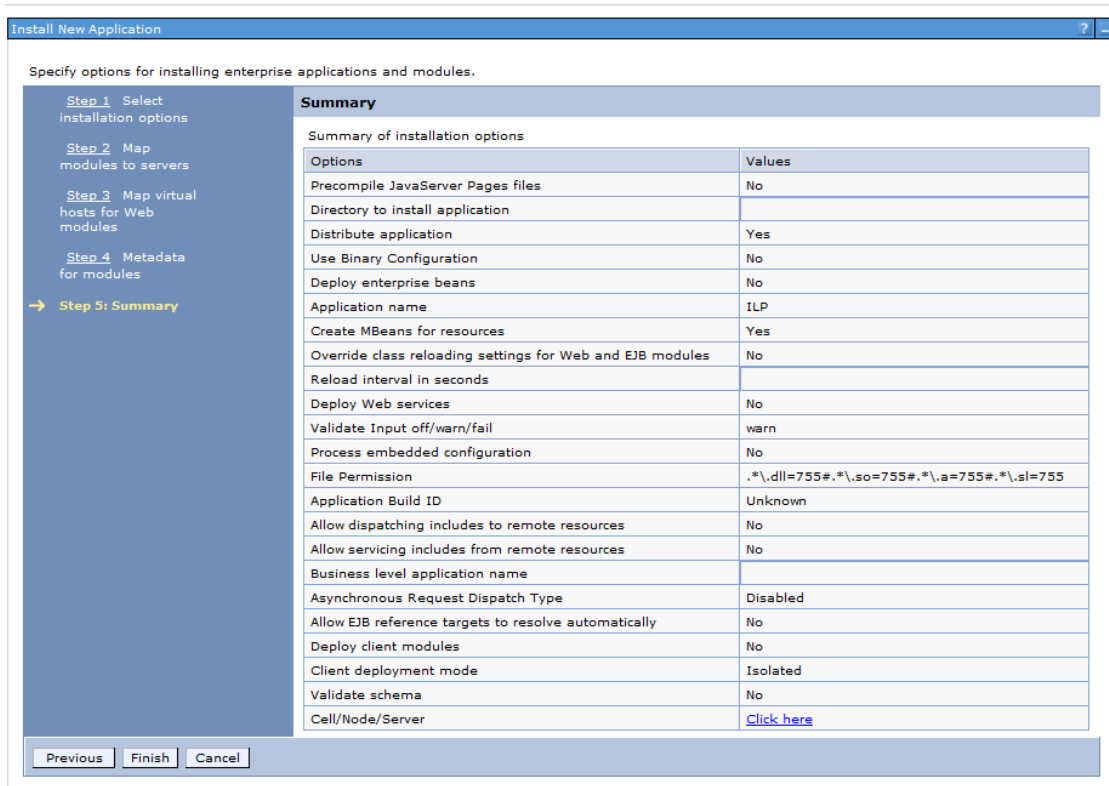


12. Click **Finish**. On successful installation, a message is displayed.

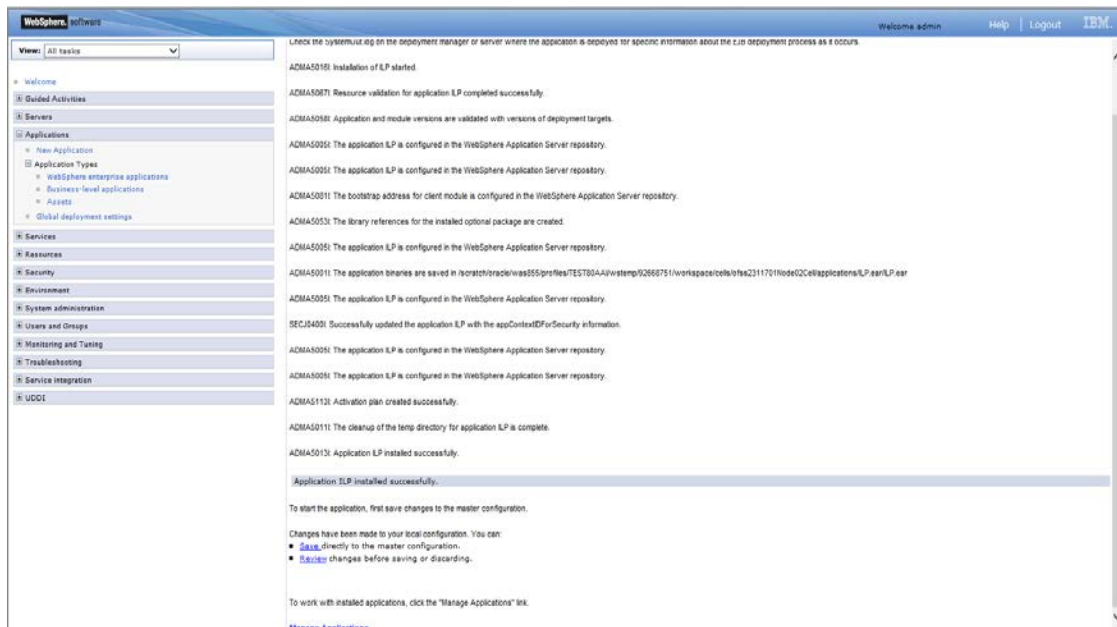


13. Click **Save** and save the master file configuration. The details are displayed in the *Master File Configuration* page.



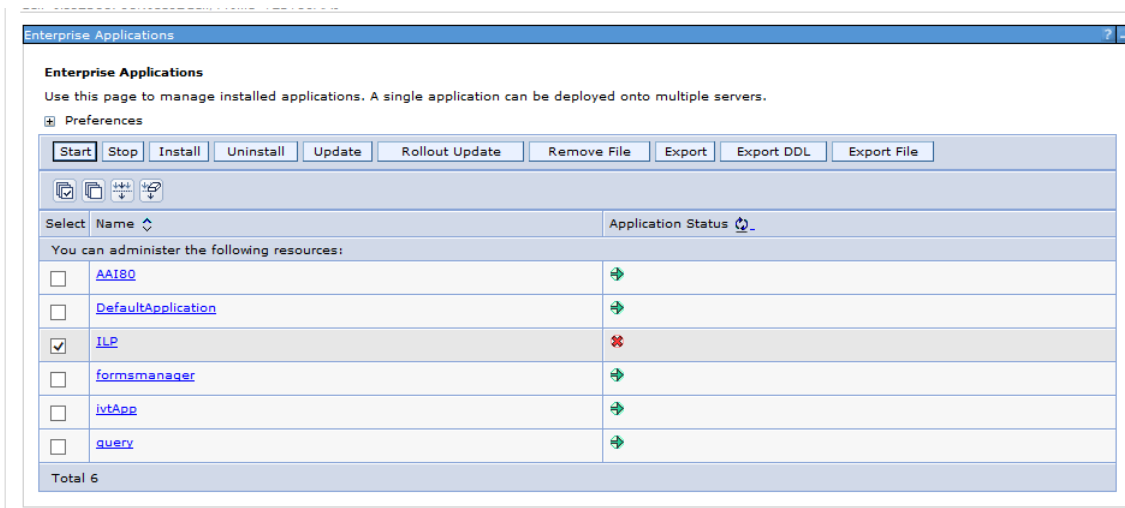

14. Select **ILP** and click **Start**. The Enterprise Application page is displayed with confirmation message.

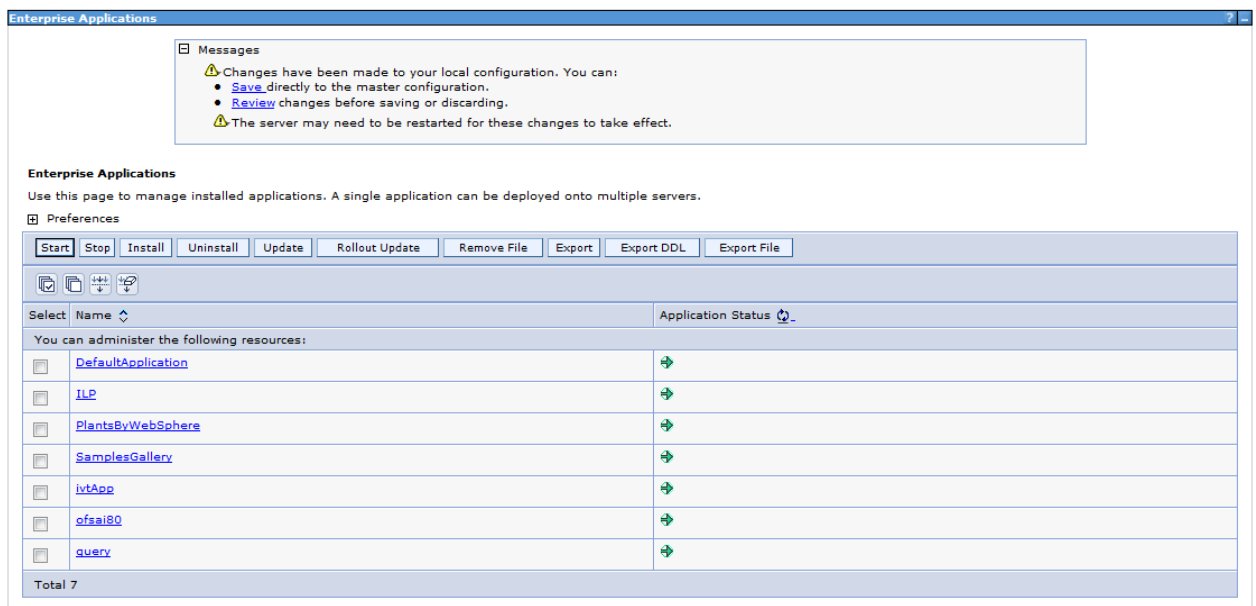

Restart all OFS AAI servers. For more information, refer to the Start/Stop Infrastructure Services section in the Oracle Financial Services Analytical Applications Infrastructure Installation and Configuration Guide available on the [OHC](#) page.

## 5.4 Logging

Once the sample application client is triggered, the logs get written onto RTI-server.log from the path <<ILP deploy area>>/logs

By default, the log mode will be set to 'info'. If detailed logs are required then follow these steps:

1. Navigate to <FIC\_HOME>/realtime\_processing/WebContent/WEB-INF/

2. Edit the file `log4j.xml` to modify the level value of the code from 'info' to 'debug' as follows:

```
<logger name="com.ofs.aai">
 <level value="DEBUG"/>
</logger>
```

3. Create `ilp.ear/ilp.war`. For more information, refer to the *Creating ILP.ear/ILP.war* section in the *Oracle Financial Services Inline Processing Engine Configuration Guide* available on the [OHC](#) page.
4. Deploy the `ILP.ear` file. For more information, refer to the *Deploying ILP.ear. in Weblogic* section or *Deploying ILP.ear. in Websphere* section in the *Oracle Financial Services Inline Processing Engine Configuration Guide* available on the [OHC](#) page.

---

## 6 HIVE Configurations

To run IPE in HIVE, perform the following configurations:

---

**NOTE:** HIVE supports only batch mode processing.

---

### 6.1 Loading UDF file in HIVE

To load the UDF file in HIVE, follow these steps:

1. Copy the JAR file `$FIC_HOME/realtime_processing/ipeudf/lib/ofsa_ipe_udf.jar` to the host on which HIVE Server2 is running.
2. Provide the HIVE user with Read, Write and Execute permissions to this directory, and make a note of the path (For example, `/opt/local/hive/lib/`).
3. Login to the Cloudera Manager Console as an admin user and navigate to Clusters menu, click on HIVE. The HIVE service window appears.
4. Click the **Configuration** tab.

---

**NOTE:** This is the Classic layout of the Cloudera Manager console.

---

5. Click Service-Wide menu and select **Advanced**.
6. Configure the HIVE Auxiliary JARs Directory property with the HIVE Server2 host path from Step 1, `/opt/local/hive/lib/`.
7. Click **Save Changes**. The JARs are added to `HIVE_AUX_JARS_PATH` environment variable.
8. Redeploy the HIVE client configuration. Follow these steps:
  - a. Navigate to the HIVE service in the Cloudera Manager Admin Console.
  - b. On the Actions menu, select Deploy Client Configuration.
  - c. Click Deploy Client Configuration.
9. Restart the HIVE service. If the HIVE Auxiliary JARs Directory property is configured but the directory does not exist, HIVE Server2 does not start. Follow these steps:
  - a. On the **Actions** menu, select **Restart**.
  - b. Click **Restart**.

### 6.2 Creating Result Tables

To create Result Tables for HIVE, follow these steps:

1. Login to the server where OFSAA is installed.

2. Navigate to the path `$FIC_HOME/realtime_processing/infodomscripsts/DDL/hive` and execute the scripts in `create_infodom.hql` file into the Datadom (HIVE schema).
3. The tables `RTI_ASSMNT_EVAL_RESULT` and `RTI_ASSMNT_RESULT` are created.

## Appendix A

### Inline Processing URL of JMS

Construct URL for JMS as below.

- **Websphere**→`iiop://<APP_SERVER_HOST_NAME>:<BOOTSTRAP_ADDRESS>`

For example, `iiop://myhost.mydomain.com:2809`

---

**NOTE:** For more information, refer to the *Oracle Financial Services Analytical Applications Infrastructure Inline Processing Configuration Guide* available in the [OTN](#) page. Check the port in the *Websphere* section.

---

- **Weblogic**→`t3://<APP_SERVER_HOST_NAME>:<SERVLET PORT>` (Use t3s protocol for SSL)

For example, `t3://myhost.mydomain.com:7001`

---

**NOTE:** `<APP_SERVER_HOST_NAME>` is the IP or the Host Name of a server where WebLogic or WebSphere is installed.

---

## Appendix B

### Check ports in WebSphere

To check the ports in WebSphere, follow these steps:

1. Open the following URL in the browser window:  
<http://<ipaddress>:<administrative console port>/ibm/console>. (https if SSL is enabled). The Login window is displayed.
2. Login with the Administrator **Username** and **Password**.
3. Click **+** to expand **Servers**.
4. Click **+** to Server Types.
5. Click WebSphere application servers.

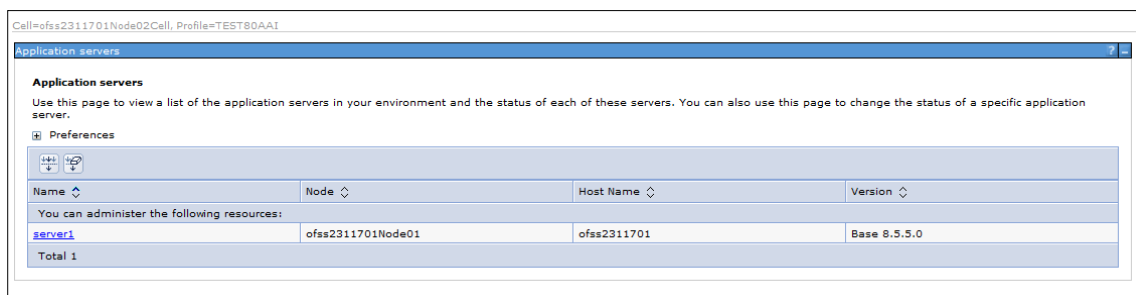


Figure 63: Application Servers

6. Click **server1**.

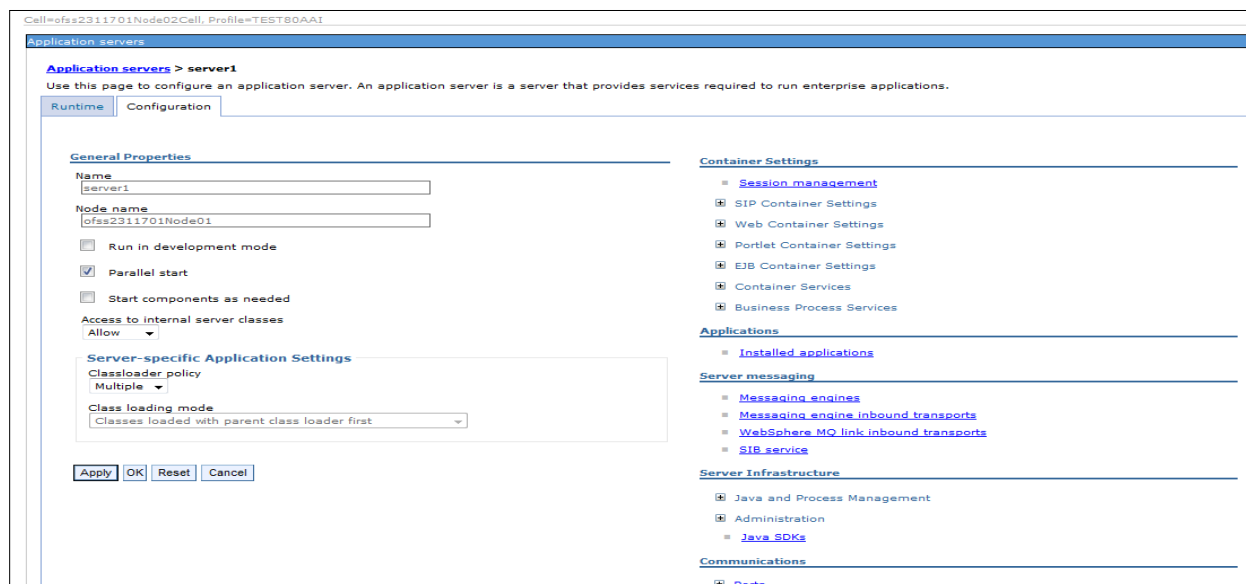


Figure 64: Application Servers

7. Click + to expand **Ports** under **Communications**.

The screenshot shows the Oracle WebCenter console configuration page. On the left, there are settings for 'Classloader policy' (set to 'Multiple') and 'Class loading mode' (set to 'Classes loaded with parent class loader first'). Below these are 'Apply', 'OK', 'Reset', and 'Cancel' buttons. The main area is divided into sections: 'Server messaging' (with sub-items: Messaging engines, Messaging engine inbound transports, WebSphere MQ link inbound transports, SIB service), 'Server Infrastructure' (with sub-items: Java and Process Management, Administration, Java SDKs), and 'Communications' (with sub-item: Ports). The 'Ports' section is expanded to show a table of port configurations.

Port Name	Port	Details
BOOTSTRAP_ADDRESS	2811	
SOAP_CONNECTOR_ADDRESS	8882	
ORB_LISTENER_ADDRESS	9102	
SAS_SSL_SERVERAUTH_LISTENER_ADDRESS	9409	
CSIV2_SSL_SERVERAUTH_LISTENER_ADDRESS	9408	
CSIV2_SSL_MUTUALAUTH_LISTENER_ADDRESS	9407	
WC_adminhost	9062	
WC_defaulthost	9083	
DCS_UNICAST_ADDRESS	9355	
WC_adminhost_secure	9045	
WC_defaulthost_secure	9445	
SIP_DEFAULTHOST	5065	
SIP_DEFAULTHOST_SECURE	5064	
SIB_ENDPOINT_ADDRESS	7278	
SIB_ENDPOINT_SECURE_ADDRESS	7288	
SIB_MQ_ENDPOINT_ADDRESS	5560	
SIB_MQ_ENDPOINT_SECURE_ADDRESS	5580	
IPC_CONNECTOR_ADDRESS	9635	
OVERLAY_UDP_LISTENER_ADDRESS	11007	
OVERLAY_TCP_LISTENER_ADDRESS	11008	

Below the table, there are additional sections: 'Messaging' (with sub-item: Communications Enabled Applications (CEA)) and 'Performance'.

Figure 65: Ports List

## Appendix C

### Checking Target Inbound transport chain and Provider endpoints values

To check the values, follow these steps:

1. Open the following URL in the browser window:  
<http://<ipaddress>:<administrative console port>/ibm/console>. (https if SSL is enabled). The Login window is displayed.
2. Login with the Administrator **Username** and **Password**.
3. Click **+** to expand **Servers** in the LHS menu.
4. Click **+** Server Types.
5. Click **WebSphere application servers**. The Application servers screen is displayed.

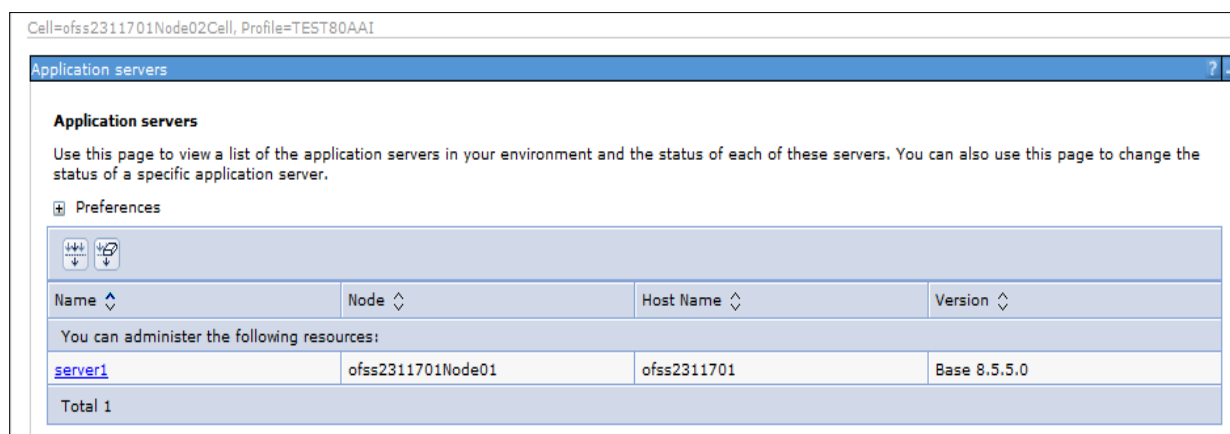


Figure 66: Application servers

6. Click **server1**.
7. Navigate to **Configuration** tab.


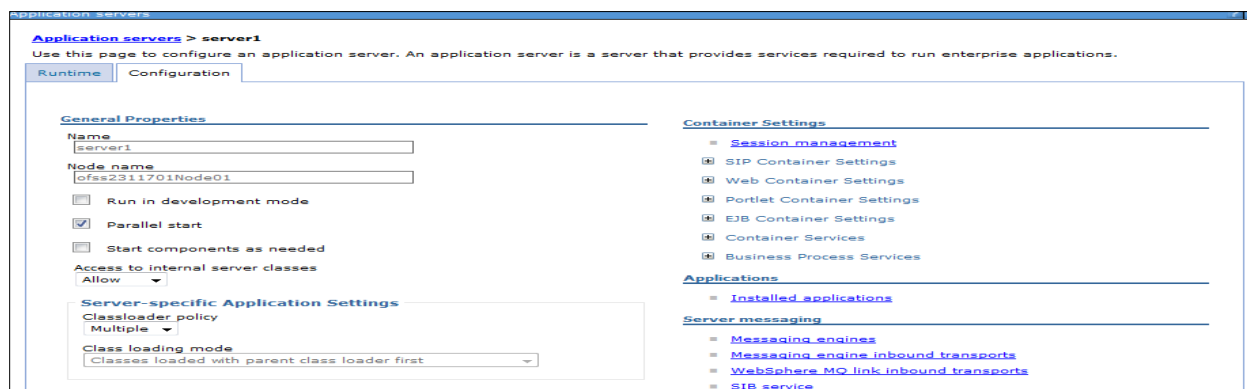


Figure 67: Configuration

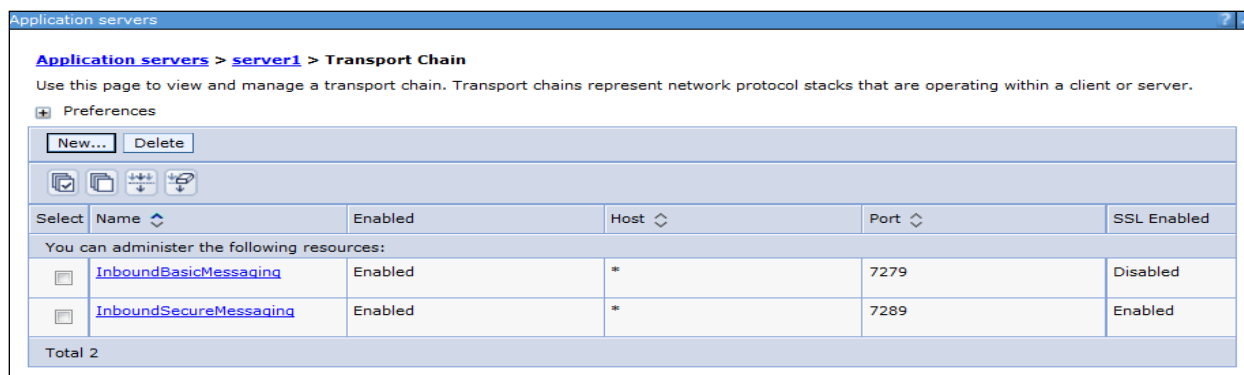

8. Under **Server messaging**, select **Messaging engine inbound transports**. The *Transport Chain* screen is displayed.



**Figure 68: Transport Chain**

9. Note the Transport chain name `InboundBasicMessaging` for Target Inbound Transport Chain.
10. Use the following **Provider endpoints** format: `<WebSphere_HostName> : <SIB_ENDPOINT_ADDRESS port>: <Transport Chain Name>`
  - `<WebSphere_HostName>`: The hostname of the server where WebSphere is installed.
  - `<SIB_ENDPOINT_ADDRESS port>`: The transport chain port corresponding for Transport chain name as `InboundBasicMessaging`.
  - `<Transport Chain Name>`: The Transport chain name as `InboundBasicMessaging`.

For example: `ofss222868.in.oracle.com:7279:InboundBasicMessaging`

**NOTE:** The transport chain name and Provider endpoints should be entered during configuration of JMS Connection Factory. Refer to section [Configuring JMS Connection Factory](#) for more details.



OFS AAA IPE

8.0.6.0.0 Configuration Guide

Oracle Corporation  
World Headquarters  
500 Oracle Parkway  
Redwood Shores, CA 94065  
U.S.A.

Worldwide Inquiries:

Phone: +1.650.506.7000

Fax: +1.650.506.7200

[www.oracle.com/us/industries/financial-services/](http://www.oracle.com/us/industries/financial-services/)

Copyright © 2018 Oracle Financial Services Software Limited. All rights reserved.

No part of this work may be reproduced, stored in a retrieval system, adopted or transmitted in any form or by any means, electronic, mechanical, photographic, graphic, optic recording or otherwise, translated in any language or computer language, without the prior written permission of Oracle Financial Services Software Limited.

Due care has been taken to make this OFSAAI IPE Configuration Guide 8.0.6.0.0 and accompanying software package as accurate as possible. However, Oracle Financial Services Software Limited makes no representation or warranties with respect to the contents hereof and shall not be responsible for any loss or damage caused to the user by the direct or indirect use of this OFSAAI IPE Configuration Guide 8.0.6.0.0 and the accompanying Software System. Furthermore, Oracle Financial Services Software Limited reserves the right to alter, modify or otherwise change in any manner the content hereof, without obligation of Oracle Financial Services Software Limited to notify any person of such revision or changes.

All company and product names are trademarks of the respective companies with which they are associated.