

**Machine Learning Installation Manual**  
**Oracle FLEXCUBE Investor Servicing**  
**Release 12.1.0.8.1**  
[July][2020]



## Table of Contents

<b>1</b>	<b>Glossary:</b>	<b>3</b>
<b>2</b>	<b>Introduction:</b>	<b>3</b>
<b>3</b>	<b>Application Compatibility:</b>	<b>3</b>
3.1	Oracle FLEXCUBE Investor Servicing	3
3.2	Oracle R Enterprise (ORE)	3
3.3	Machine Learning Database	3
<b>4</b>	<b>Oracle FLEXCUBE Machine Learning Architecture</b>	<b>4</b>
<b>5</b>	<b>Pre-Installation Checklist:</b>	<b>4</b>
5.1	FLEXCUBE Investor Servicing replicated Database Instance	4
5.2	Machine Learning Database Instance	4
5.3	Data Replication	5
<b>6</b>	<b>Installation Steps:</b>	<b>5</b>
6.1	Machine Learning Instance	6
6.1.1	Object Summary	6
6.1.2	User Creation and granting privileges	6
6.1.3	Installation of Database Objects	6
6.1.4	Installation of ORE packages	8
6.1.5	Installation of ORE wrapper scripts	9
6.2	FLEXCUBE Investor Servicing Instance	14
6.2.1	Object Summary	14
6.2.2	Login to FLEXCUBE Investor Servicing Instance	14
6.2.3	Database Link	14
6.2.4	Execute the INSERT scripts	14
6.2.5	FLEXCUBE Investor Servicing User Interfaces	15
6.3	Machine Learning Validation Checkpoints:	15
6.3.1	Validate Database Objects	15
6.3.2	Validate ORE scripts:	15
6.4	FLEXCUBE Validation Checkpoints:	16
6.4.1	Validate Database Objects	16
6.4.2	Validate database link credentials	17
6.4.3	Validate FLEXCUBE menu	17

## 1 Glossary:

Abbreviation	Detailed Description
FCIS	Oracle FLEXCUBE Investor Servicing
ML	Machine Learning
LTV	Life Time Value
ORE	Oracle R Enterprise
IDE	Integrated Development Environment

## 2 Introduction:

This document contains detailed guidelines to install Oracle FLEXCUBE Investor Servicing Machine Learning framework.

***Note:** Please refer Oracle FLEXCUBE Investor Servicing Machine Learning User Manual for Model execution and control*

## 3 Application Compatibility:

### 3.1 Oracle FLEXCUBE Investor Servicing

Version: 12.4.0.11.6


### 3.2 Oracle R Enterprise (ORE)

- All the Machine Learning models were built using Oracle R Enterprise 1.5.1
- For installation and setup please refer to the guidelines received with the licensed version of Oracle R Enterprise Software.
- Oracle Enterprise Linux server 7.1 (x86 64 bit)

### 3.3 Machine Learning Database

- Oracle Database 18c

## 4 Oracle FLEXCUBE Machine Learning Architecture

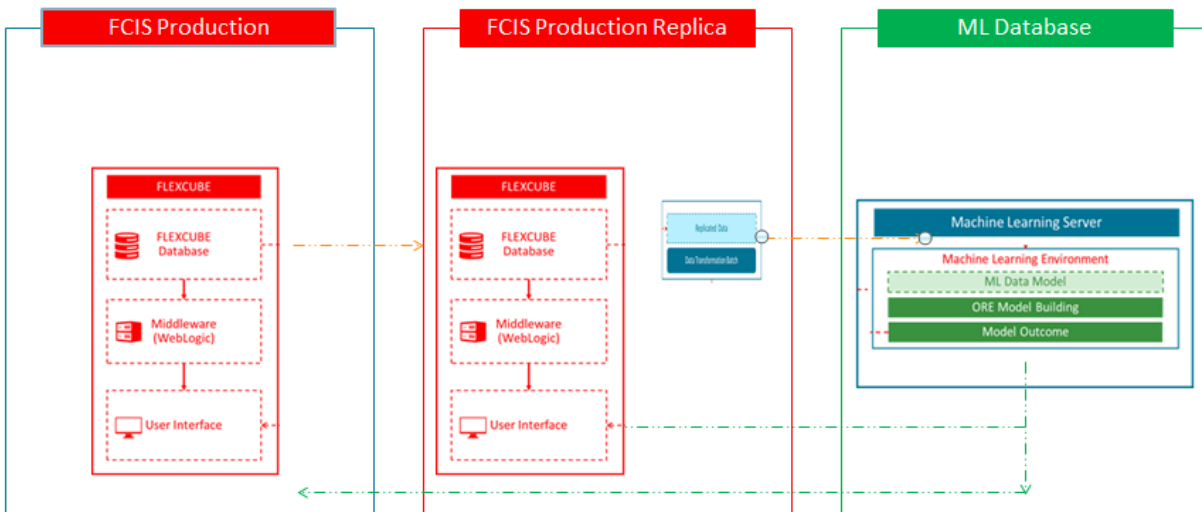

### Note:

- FLEXCUBE Investor Servicing replicated database and Machine learning database should be on two different servers
- This is to ensure that the machine learning workload is not on the critical path of banking operations and hog critical server memory

## 5 Pre-Installation Checklist:

### 5.1 FLEXCUBE Investor Servicing replicated Database Instance

- FLEXCUBE Investor Servicing replicated database instance should be up and available.

### 5.2 Machine Learning Database Instance



**Note:** ORE database MUST be a separate instance from Oracle FLEXCUBE Investor Servicing replicated Instance. This is to ensure that the machine learning workload is not on the critical path of banking operations and hog critical server memory

**Please follow the sequential steps are detailed below.**

- 1) Install Oracle Database on the Machine Learning server. Refer to [3.3](#) for compatible database versions.
- 2) Oracle R Enterprise should be installed in Machine Learning database server. Please refer [3.2](#) for compatible ORE version.
- 3) For ORE installation and setup please refer to the guideline received with licensed version.
- 4) R Client needs to be installed to access Oracle R Enterprise server from client machine. R client could be open source R or Oracle R Distribution. Below are the links to install the same.
  - a. Open source R: <https://cran.r-project.org/bin/windows/base/>
  - b. Oracle R Distribution (ORD): <https://oss.oracle.com/ORD/>
- 5) RStudio IDE can be installed for developer friendly environment. Below is the link to download RStudio. Download the version based on the operating system in client machine  
<https://www.rstudio.com/products/rstudio/download/#download>
- 6) Set up Oracle R Enterprise client in client machine. Please refer to the guideline received with licensed version.

### 5.3 Data Replication

FCIS Data replication will happen on the production replica environment which will be on separate server.



It is left to the bank/solution team to decide on the data Replication Software including the mode of replication and frequency of replication

**Please ensure FLEXCUBE Investor Servicing data is already replicated into the Machine Learning Schema, before proceeding ahead with the Installation**

## 6 Installation Steps:

To proceed with the installation steps first check if all the checkpoints mentioned in section [Pre-Installation Checklist](#) are met. Follow below steps sequentially for the installation.

## 6.1 Machine Learning Instance

### 6.1.1 Object Summary

No.	OBJECT TYPE	COUNT
1	TABLES	9
2	PACKAGE SPECIFICATION(SPC)	1
3	PACKAGE BODY (SQL)	1
4	R BINARY PACKAGES (ORE)	2
5	R WRAPPER SCRIPT (ORE)	1
	<b>Total Object Count</b>	<b>14</b>

### 6.1.2 User Creation and granting privileges

#### 6.1.2.1 Create User

Log in to the Machine Learning database with SYSDBA credentials and execute below query to create a machine learning user.

**CREATE USER <username> IDENTIFIED BY <password>;**

If the user has been already created at the time of ORE installation, then proceed to next step

#### 6.1.2.2 Give necessary privileges

Grant the below privileges to the machine learning user created in the previous step (6.1.2.1)

- i. **grant CONNECT,ODMRUSER,RQADMIN TO <username>;**
- ii. **grant CREATE SESSION to <username>;**
- iii. **grant CREATE TABLE to <username>;**
- iv. **grant CREATE VIEW to <username>;**
- v. **grant CREATE DATABASE LINK to <username>;**
- vi. **grant CREATE MINING MODEL to <username>;**
- vii. **grant CREATE PROCEDURE to <username>;**
- viii. **grant CREATE JOB to <username>;**

### 6.1.3 Installation of Database Objects

#### 6.1.3.1 Login to the Machine Learning schema

Connect using the user credentials defined in step (6.1.2.1)

#### 6.1.3.2 *Execute DDL scripts*

Execute the DDL scripts mentioned in section [Machine Learning Data Model](#) . Below are the DDL scripts (8 Tables)

1. MLTB\_FCIS\_INVACC\_CHURN.ddl
2. MLTB\_FCIS\_INCH\_PROCESSSTATUS.ddl
3. MLTB\_FCIS\_INCH\_RISK\_CAT.ddl
4. MLTB\_FCIS\_INCH\_SEG.ddl
5. MLTB\_FCIS\_INVACC\_CHURN\_HIST.ddl
6. MLTB\_FCIS\_FUND\_MASTER.ddl
7. MLTB\_FCIS\_INCH\_SEG\_HIST.ddl
8. MLTB\_FCIS\_INCH\_RISK\_CAT\_HIST.ddl

#### 6.1.3.3 *Execute the VIEW scripts*

Not Applicable.

#### 6.1.3.4 *Execute the INSERT Scripts*

Not Applicable.

#### 6.1.3.5 *Execute Sequence Scripts*

Not Applicable.

#### 6.1.3.6 *Create PROCEDURE*

Not Applicable.

#### 6.1.3.7 *Create PACKAGES*

Compile the SQL script(s) mentioned in section [Machine Learning Data Model](#) . Below are the SQL script(s) for creating package specification(s) and body (One SPC and one SQL)

1. MLPKS\_PROCESSOR.SPC
2. MLPKS\_PROCESSOR.SQL

#### 6.1.3.8 *Create FUNCTION*

Not Applicable.

## 6.1.4 Installation of ORE packages

### 6.1.4.1 Download ML binary packages.

*There will be two binary packages, one for the global function and another one for FCIS.*

*Linux Binary Packages:*

1. `globalfunction_0.1.0_R_x86_64-pc-linux-gnu.tar.gz`
2. `FCISML_0.1.0_R_x86_64-pc-linux-gnu.tar.gz`

### 6.1.4.2 Check the user access and environment variables.

*Usually those things are already set up while installing ORE in the server*

*The user should have the following access rights*

- *Has sudo rights access or root access for installing Oracle R Distribution.*
- *Is a member of the dba group for installing and using Oracle R Enterprise*
- *Has write access to \$ORACLE\_HOME/lib.*

*The following environment variable should be set up...*

- *\$ORACLE\_SID specifies the identifier (SID) of the database.*
- *\$ORACLE\_HOME specifies the home directory of the database.*
- *\$LD\_LIBRARY\_PATH includes \$ORACLE\_HOME/lib.*
- *\$PATH includes \$ORACLE\_HOME/bin.*

### 6.1.4.3 Now install the packages in the server by executing following command.

*Use sudo command in case current user does not have write access to the ORE library folder*

**ORE CMD INSTALL {package name}**

*E.g.*

**ORE CMD INSTALL globalfunction\_0.1.0\_R\_x86\_64-pc-linux-gnu.tar.gz**

**ORE CMD INSTALL FCISML\_0.1.0\_R\_x86\_64-pc-linux-gnu.tar.gz**

```
-bash-4.2$ sudo ORE CMD INSTALL globalfunction_0.1.0_R_x86_64-pc-linux-gnu.tar.gz
Password:
* installing to library '/scratch/OracleDB/R/library'
* installing *binary* package 'globalfunction' ...
* DONE (globalfunction)
```



```
-bash-4.2$ sudo ORE CMD INSTALL FCISML_0.1.0_R_x86_64-pc-linux-gnu.tar.gz
Password:
* installing to library '/scratch/OracleDB/R/library'
* installing *binary* package 'FCISML' ...
* DONE (FCISML)
```

6.1.4.4 After successful installation the packages will be present in ORE library path...

```
-bash-4.2$ cd /scratch/OracleDB/R/library
-bash-4.2$
-bash-4.2$ ll
total 92
drwxr-xr-x 9 db19c db19c 4096 Sep 18 07:55 arules
drwxr-xr-x 7 db19c db19c 4096 Sep 18 07:55 Cairo
drwxr-xr-x 7 db19c db19c 4096 Sep 18 07:55 DBI
drwxr-xr-x 6 root root 4096 Sep 24 03:15 FCISML
drwxr-xr-x 6 root root 4096 Sep 24 03:01 globalfunction
drwxr-xr-x 6 root root 4096 Sep 24 03:10 LFCISML
```


## 6.1.5 Installation of ORE wrapper scripts

Set up the ORE client softwares in client machine before proceeding. Please refer to the guidelines received with the licensed version.

### 6.1.5.1 Launch RStudio


1. Launch RStudio IDE.
2. The default screen will be displayed as shown below.
3. If open source R is installed, then it will show the version of Open Source R

Open source R:

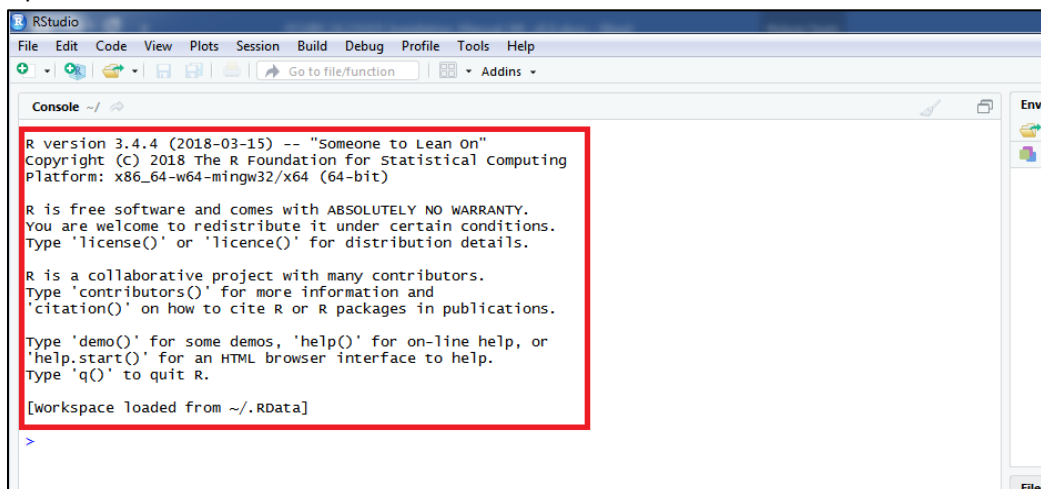

4. Or, if Oracle R Distribution (ORD) is used, it will show the version of ORD.

Oracle R Distribution (ORD):

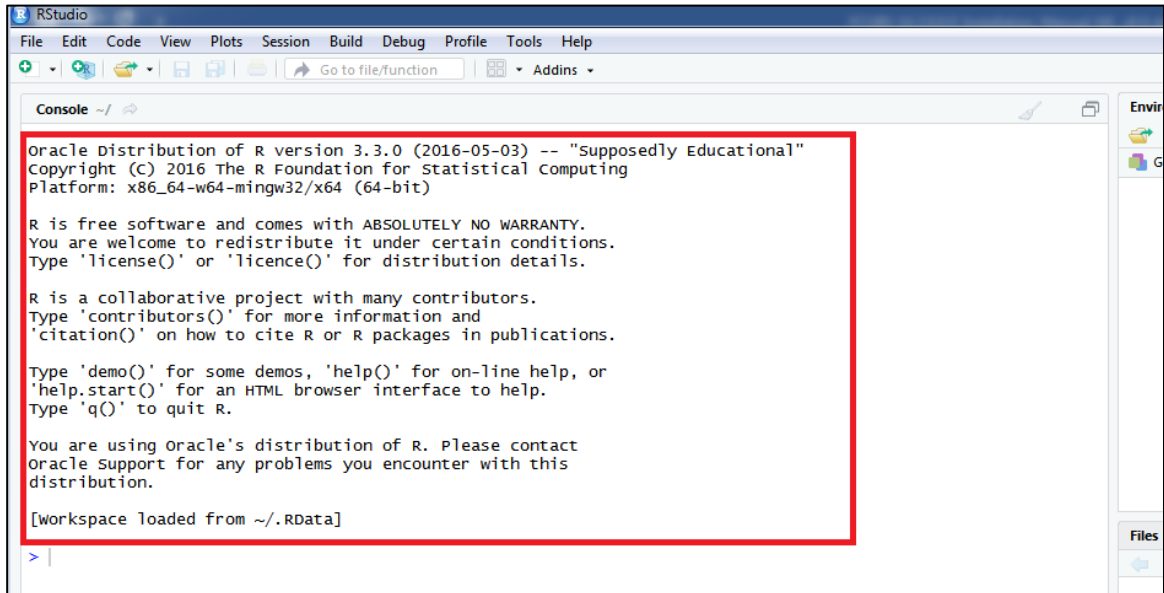

```
RStudio
File Edit Code View Plots Session Build Debug Profile Tools Help
Go to file/function Addins
Console ~/
Oracle Distribution of R version 3.3.0 (2016-05-03) -- "Supposedly Educational"
Copyright (C) 2016 The R Foundation for Statistical Computing
Platform: x86_64-w64-mingw32/x64 (64-bit)

R is free software and comes with ABSOLUTELY NO WARRANTY.
You are welcome to redistribute it under certain conditions.
Type 'license()' or 'licence()' for distribution details.

R is a collaborative project with many contributors.
Type 'contributors()' for more information and
'citation()' on how to cite R or R packages in publications.

Type 'demo()' for some demos, 'help()' for on-line help, or
'help.start()' for an HTML browser interface to help.
Type 'q()' to quit R.


You are using Oracle's distribution of R. Please contact
oracle support for any problems you encounter with this
distribution.

[workspace loaded from ~/.RData]
>
```

#### 6.1.5.2 Loading ORE Library

1. From RStudio console execute below command

> library(ORE)

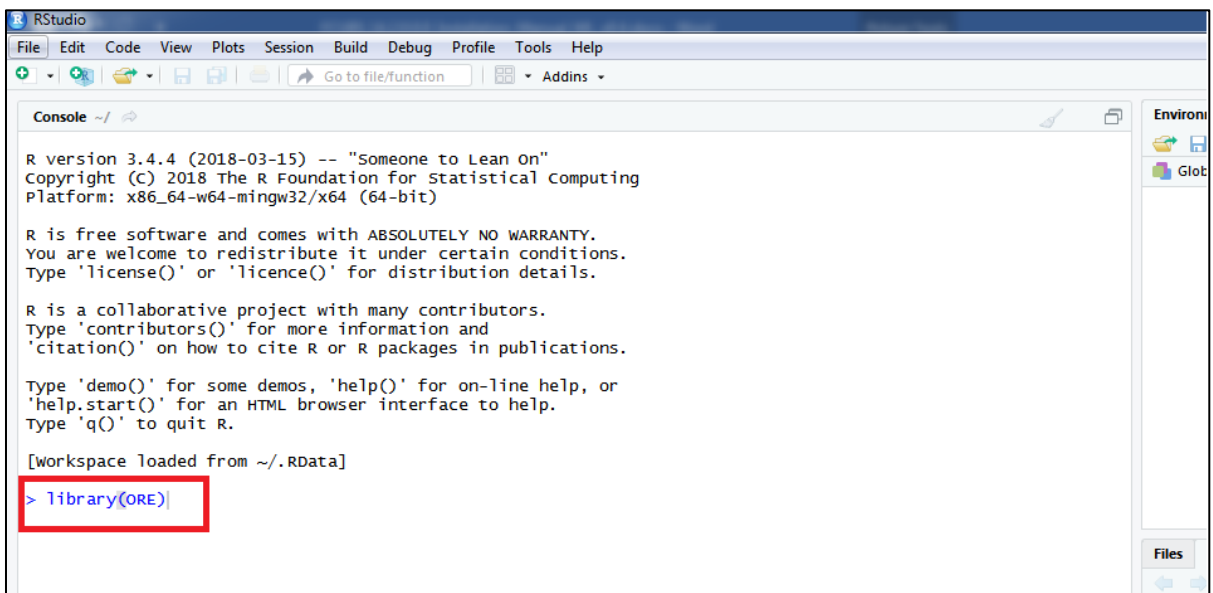

```
RStudio
File Edit Code View Plots Session Build Debug Profile Tools Help
Go to file/function Addins
Console ~/
R version 3.4.4 (2018-03-15) -- "Someone to Lean On"
Copyright (C) 2018 The R Foundation for Statistical Computing
Platform: x86_64-w64-mingw32/x64 (64-bit)


R is free software and comes with ABSOLUTELY NO WARRANTY.
You are welcome to redistribute it under certain conditions.
Type 'license()' or 'licence()' for distribution details.

R is a collaborative project with many contributors.
Type 'contributors()' for more information and
'citation()' on how to cite R or R packages in publications.

Type 'demo()' for some demos, 'help()' for on-line help, or
'help.start()' for an HTML browser interface to help.
Type 'q()' to quit R.

[workspace loaded from ~/.RData]
> library(ORE)
```

2. Once executed, it will show the following output in console

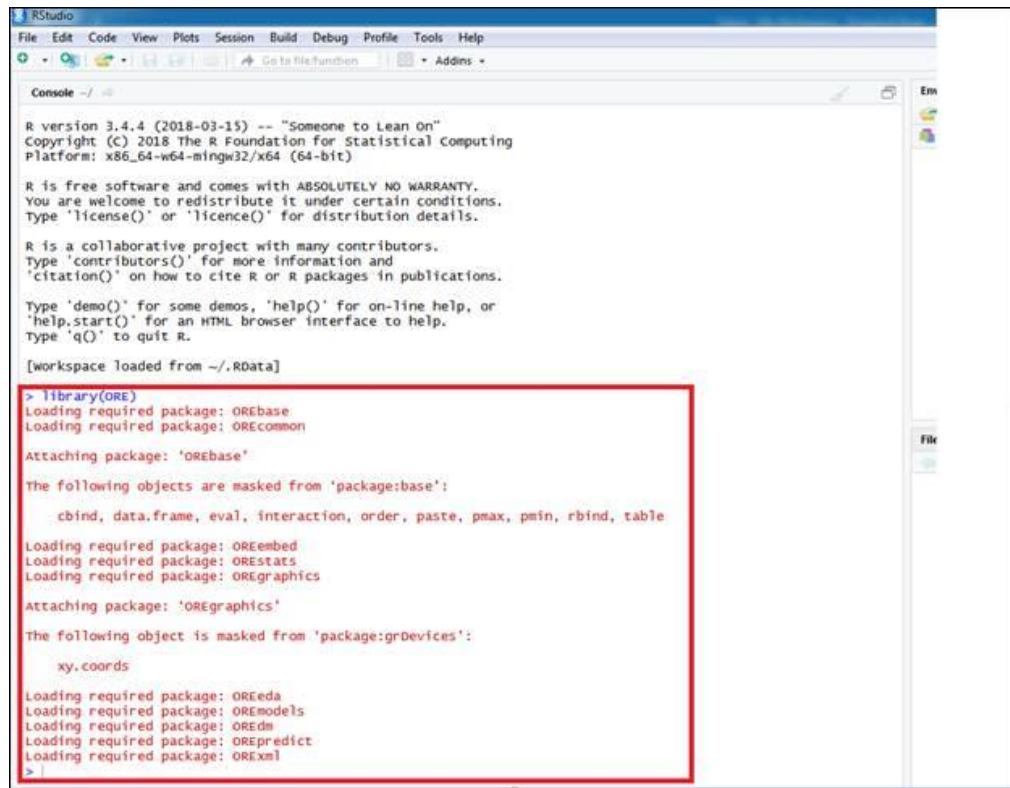

```
R version 3.4.4 (2018-03-15) -- "Someone to Lean On"
Copyright (c) 2018 The R Foundation for Statistical Computing
Platform: x86_64-w64-mingw32/x64 (64-bit)

R is free software and comes with ABSOLUTELY NO WARRANTY.
You are welcome to redistribute it under certain conditions.
Type 'license()' or 'licence()' for distribution details.

R is a collaborative project with many contributors.
Type 'contributors()' for more information and
'citation()' on how to cite R or R packages in publications.

Type 'demo()' for some demos, 'help()' for on-line help, or
'help.start()' for an HTML browser interface to help.
Type 'q()' to quit R.

[workspace loaded from ~/.RData]

> library(ORE)
Loading required package: OREbase
Loading required package: OREcommon
Attaching package: 'OREbase'

The following objects are masked from 'package:base':

    cbind, data.frame, eval, interaction, order, paste, pmax, pmin, rbind, table

Loading required package: OREembed
Loading required package: OREstats
Loading required package: OREgraphics
Attaching package: 'OREgraphics'

The following object is masked from 'package:grDevices':

    xy.coords


Loading required package: OREeda
Loading required package: OREmodels
Loading required package: OREdm
Loading required package: OREpredict
Loading required package: ORExml
>
```

### 6.1.5.3 Connecting to the ORE Server

1. To connect ORE server from the client machine, execute below command.

```
ore.connect (user = <username>, sid =<sid>, host =<hostname>, password=<password>,  
port = <port>)
```

**Note:** The credential created in step 6.1.2.1

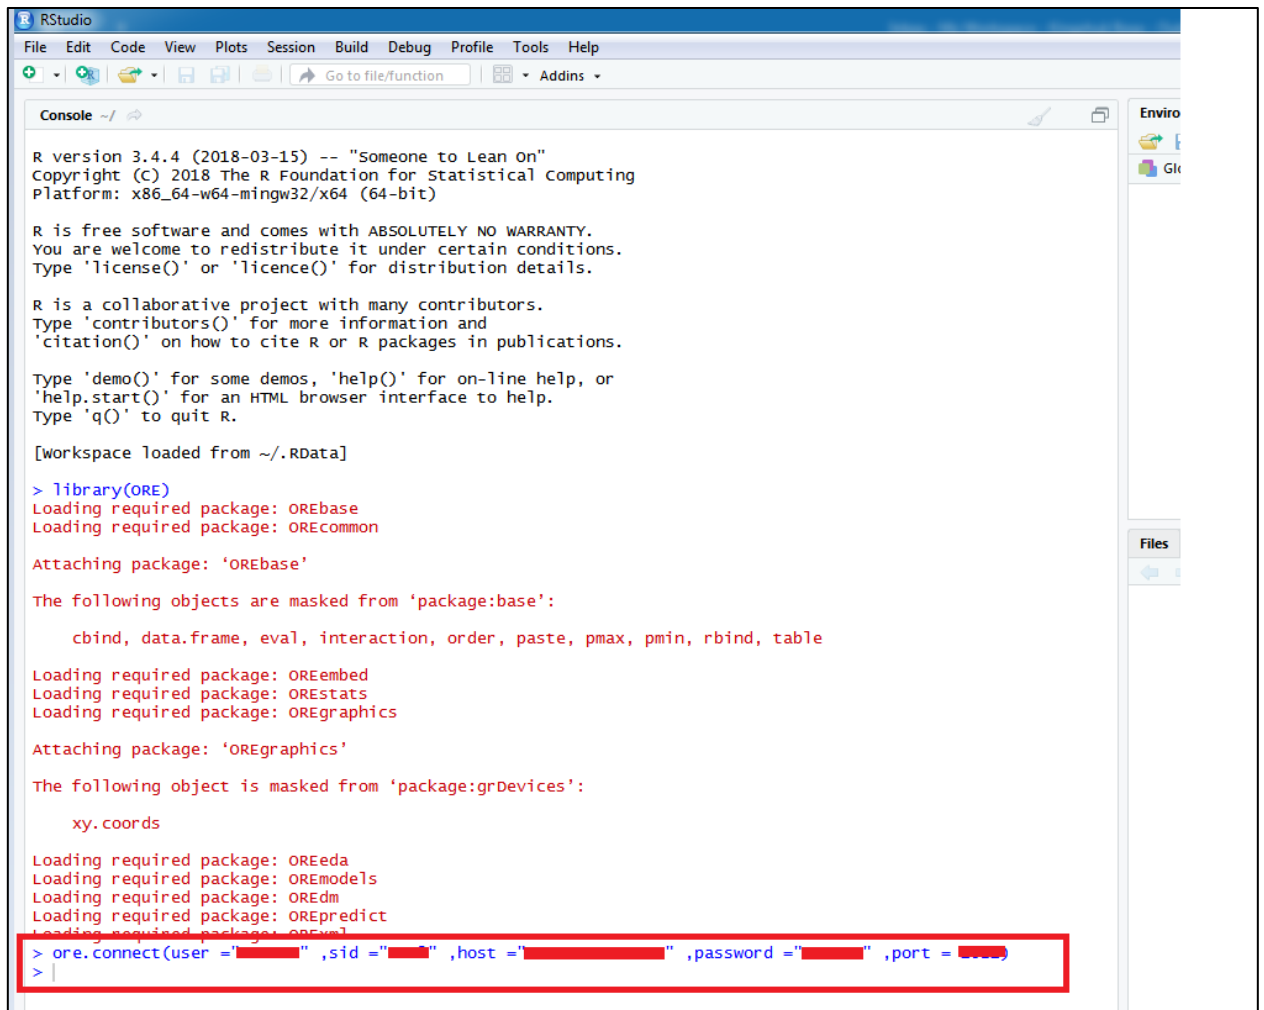

```
R version 3.4.4 (2018-03-15) -- "Someone to Lean On"
Copyright (C) 2018 The R Foundation for Statistical Computing
Platform: x86_64-w64-mingw32/x64 (64-bit)

R is free software and comes with ABSOLUTELY NO WARRANTY.
You are welcome to redistribute it under certain conditions.
Type 'license()' or 'licence()' for distribution details.

R is a collaborative project with many contributors.
Type 'contributors()' for more information and
'citation()' on how to cite R or R packages in publications.

Type 'demo()' for some demos, 'help()' for on-line help, or
'help.start()' for an HTML browser interface to help.
Type 'q()' to quit R.

[workspace loaded from ~/.RData]

> library(ORE)
Loading required package: OREbase
Loading required package: OREcommon

Attaching package: 'OREbase'

The following objects are masked from 'package:base':

    cbind, data.frame, eval, interaction, order, paste, pmax, pmin, rbind, table

Loading required package: OREembed
Loading required package: OREstats
Loading required package: OREgraphics

Attaching package: 'OREgraphics'

The following object is masked from 'package:grDevices':

    xy.coords

Loading required package: OREeda
Loading required package: OREmodels
Loading required package: OREdm
Loading required package: OREpredict
Loading required package: OREeval
> ore.connect(user = "..." ,sid = "..." ,host = "..." ,password = "..." ,port = 5555)
>
```

#### 6.1.5.4 Testing the ORE Connection:

1. To check if ORE client is connected to ORE server, execute below command from RStudio console.  
`ore.is.connected()`
2. It should return TRUE if ORE connection is successful, otherwise it will return FALSE.

```

> library(ORE)
Loading required package: OREbase
Loading required package: OREcommon
Attaching package: 'OREbase'
The following objects are masked from 'package:base':
  cbind, data.frame, eval, interaction, order, paste, pmax, pmin, rbind, table
Loading required package: OREembed
Loading required package: OREstats
Loading required package: OREgraphics
Attaching package: 'OREgraphics'
The following object is masked from 'package:grDevices':
  xy.coords
Loading required package: OREeda
Loading required package: OREmodels
Loading required package: OREdm
Loading required package: OREpredict
Loading required package: ORExml
> ore.connect(user = " ", sid = " ", host = " ", password = " ", port = )
> ore.is.connected()
[1] TRUE
>

```

6.1.5.5 Download the FCISML wrapper script and save it in a local directory.

E.g. D:\FCIS

**Script Name: FCISML\_0.1.0\_WRAPPER\_CUSTOM.R**

6.1.5.6 Run ORE Wrapper Scripts:


1. To run ORE scripts, execute below commands from Rstudio console

```
>source("<directory_path>/<filename.R>")
```

E.g. source("D:/FCIS/FCISML\_0.1.0\_WRAPPER\_CUSTOM.R")



Note: Please note the forward slash ("/")

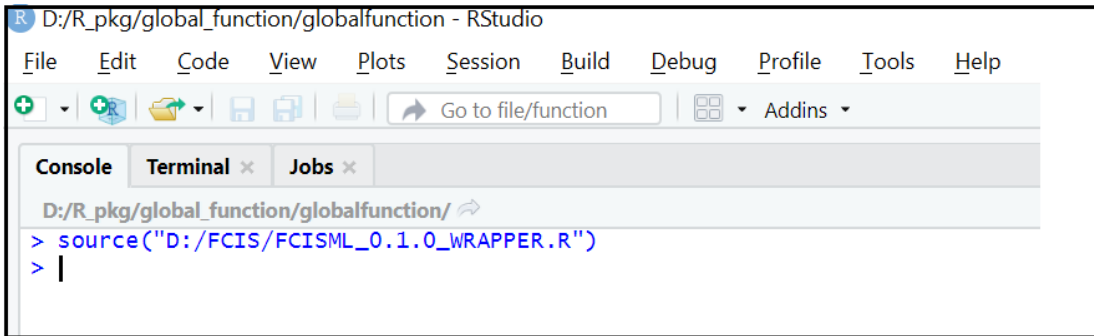

The screenshot shows the RStudio application window. The title bar indicates the file path is D:/R\_pkg/global\_function/globalfunction - RStudio. The menu bar includes File, Edit, Code, View, Plots, Session, Build, Debug, Profile, Tools, and Help. The toolbar contains icons for file operations and a search bar labeled 'Go to file/function'. The console pane is active, showing the command prompt with the command `source("D:/FCIS/FCISML_0.1.0_WRAPPER.R")` entered and executed, resulting in a new prompt line.

6.2 FLEXCUBE Investor Servicing Instance

6.2.1 Object Summary

No.	OBJECT TYPE	COUNT
1	Database Link	01
2	INC	02
3	Function IDs	04
Total Object Count		07

6.2.2 Login to FLEXCUBE Investor Servicing Instance

Connect to the FLEXCUBE Investor Servicing Database using the required credentials

6.2.3 Database Link

- 1. The database link **MLFCISLINK** must point to the machine learning user
- 2. Edit the database link script **MLFCISLINK**.SQL with the machine learning user credentials created as part of section 6.1.2.1
- 3. Execute the modified script **MLFCISLINK** SQL

 **Note: Do not change the Database link name MLFCISLINK**

6.2.4 Execute the INSERT scripts

Execute the INC scripts mentioned in section FLEXCUBE database objects, under section 5.1.2 below is the INC script(s) (one INC)

- 1. SMTB\_FUNCTION\_DESCRIPTION.INC
- 2. SMTB\_MODULES.INC
- 3. SMTB\_FCC\_FCJ\_MAPPING.INC
- 4. SMTB\_ROLE\_DETAIL.INC
- 5. ERTB\_MSGS.INC
- 6. CSTB\_LABELS.INC
- 7. CSTB\_SUMMARY\_INFO.INC

### 6.2.5 FLEXCUBE Investor Servicing User Interfaces

Please refer the standard Oracle FLEXCUBE Installation Manual for deploying these new user interface screens

1. MLDINCHP
2. MLDINCHB
3. MLDINCHS

## 6.3 Machine Learning Validation Checkpoints:

### 6.3.1 Validate Database Objects

1. Log in to the ML schema and run below SQL query

```
Select owner, object_name, object_type, status, created from all_objects  
where object_name like 'ML%'  
order by object_name;
```

2. The SQL query should return the following details.

OWNER	OBJECT NAME	OBJECT TYPE	STATUS	CREATED
< Schema name>	MLPKS_PROCESSOR	PACKAGE	VALID	Creation Date
< Schema name>	MLPKS_PROCESSOR	PACKAGE BODY	VALID	Creation Date
< Schema name>	MLTB_FCIS_FUND_MASTER	TABLE	VALID	Creation Date
< Schema name>	MLTB_FCIS_INCH_PROCESSTATUS	TABLE	VALID	Creation Date
< Schema name>	MLTB_FCIS_INCH_RISK_CAT	TABLE	VALID	Creation Date
< Schema name>	MLTB_FCIS_INCH_RISK_CAT_HIST	TABLE	VALID	Creation Date
< Schema name>	MLTB_FCIS_INCH_SEG	TABLE	VALID	Creation Date
< Schema name>	MLTB_FCIS_INCH_SEG_HIST	TABLE	VALID	Creation Date
< Schema name>	MLTB_FCIS_INVACC_CHURN	TABLE	VALID	Creation Date
< Schema name>	MLTB_FCIS_INVACC_CHURN_HIST	TABLE	VALID	Creation Date
< Schema name>	MLVW_FCIS_INVACC_CHURN	VIEW	VALID	Creation Date
< Schema name>	MLVW_FCIS_INCH_RISK_CAT	VIEW	VALID	Creation Date
< Schema name>	MLVW_FCIS_INCH_SEG	VIEW	VALID	Creation Date
< Schema name>	MLVW_ISML_INVACC_CHURN	VIEW	VALID	Creation Date
< Schema name>	MLTB_MODEL_PERF_LOG	TABLE	VALID	Creation Date

### 6.3.2 Validate ORE scripts:

1. Log in to the Machine Learning schema and run below SQL query

```
select * from user_rq_scripts order by name;
```

2. The SQL query should produce following result

NAME	SCRIPT
------	--------

NAME	SCRIPT
FCIS_FUND_SEG_ORE	<CLOB content>
FCIS_INVACC_CRN_ORE_BLD	<CLOB content>
FCIS_INVACC_CRN_ORE_EXE	<CLOB content>
FCIS_INVACC_SEG_ORE_BLD	<CLOB content>
FCIS_INVACC_SEG_ORE_EXE	<CLOB content>

## 6.4 FLEXCUBE Validation Checkpoints:

### 6.4.1 Validate Database Objects

1. Log in to the Flexcube schema and run below SQL query

```
Select owner, object_name, object_type, status, created from all_objects
where object_name like 'ML%'
order by object_name;
```

2. The SQL query should return 42 rows with the following details.

OWNER	OBJECT NAME	OBJECT TYPE	STATUS	CREATED
< Schema name>	MLFCISLINK	DATABASE LINK	VALID	Creation Date
< Schema name>	MLPKS_MLDINCHP_KERNEL	PACKAGE	VALID	Creation Date
< Schema name>	MLPKS_MLDINCHB_MAIN	PACKAGE	VALID	Creation Date
< Schema name>	MLPKS_MLDINCHP_UTILS	PACKAGE	VALID	Creation Date
< Schema name>	MLPKS_MLDINCHP_MAIN	PACKAGE	VALID	Creation Date
< Schema name>	MLPKS_MLDINCHB_KERNEL	PACKAGE	VALID	Creation Date
< Schema name>	MLPKS_MLDINCHP_KERNEL	PACKAGE BODY	VALID	Creation Date
< Schema name>	MLPKS_MLDINCHP_MAIN	PACKAGE BODY	VALID	Creation Date
< Schema name>	MLPKS_MLDINCHP_UTILS	PACKAGE BODY	VALID	Creation Date
< Schema name>	MLPKS_MLDINCHB_MAIN	PACKAGE BODY	VALID	Creation Date
< Schema name>	MLPKS_MLDINCHB_KERNEL	PACKAGE BODY	VALID	Creation Date
< Schema name>	MLTB_FCIS_INCH_RISK_CAT	SYNONYM	VALID	Creation Date
< Schema name>	MLTB_FCIS_INCH_SEG	SYNONYM	VALID	Creation Date
< Schema name>	MLTB_FCIS_INCH_RISK_CAT_HIST	SYNONYM	VALID	Creation Date
< Schema name>	MLTB_FCIS_INCH_SEG_HIST	SYNONYM	VALID	Creation Date
< Schema name>	MLTB_FCIS_INVACC_CHURN	SYNONYM	VALID	Creation Date
< Schema name>	MLTB_FCIS_INVACC_CHURN_HIST	SYNONYM	VALID	Creation Date



< Schema name>	MLTB_FCIS_INCH_PROCESSTATUS	SYNONYM	VALID	Creation Date
< Schema name>	MLTB_FCIS_FUND_MASTER	SYNONYM	VALID	Creation Date
< Schema name>	MLTBS_FCIS_INCH_RISK_CAT	SYNONYM	VALID	Creation Date
< Schema name>	MLTBS_FCIS_INCH_SEG	SYNONYM	VALID	Creation Date
< Schema name>	MLTBS_FCIS_INCH_RISK_CAT_HIST	SYNONYM	VALID	Creation Date
< Schema name>	MLTBS_FCIS_INCH_SEG_HIST	SYNONYM	VALID	Creation Date
< Schema name>	MLTBS_FCIS_INVACC_CHURN	SYNONYM	VALID	Creation Date
< Schema name>	MLTBS_FCIS_INVACC_CHURN_HIST	SYNONYM	VALID	Creation Date
< Schema name>	MLTBS_FCIS_INCH_PROCESSTATUS	SYNONYM	VALID	Creation Date
< Schema name>	MLTBS_FCIS_FUND_MASTER	SYNONYM	VALID	Creation Date
< Schema name>	MLPKSS_MLDINCHP_KERNEL	SYNONYM	VALID	Creation Date
< Schema name>	MLPKSS_MLDINCHB_MAIN	SYNONYM	VALID	Creation Date
< Schema name>	MLPKSS_MLDINCHB_KERNEL	SYNONYM	VALID	Creation Date
< Schema name>	MLPKSS_MLDINCHP_MAIN	SYNONYM	VALID	Creation Date
< Schema name>	MLPKSS_PROCESSOR	SYNONYM	VALID	Creation Date
< Schema name>	MLVW_FCIS_INVACC_CHURN	SYNONYM	VALID	Creation Date
< Schema name>	MLVW_FCIS_INCH_RISK_CAT	SYNONYM	VALID	Creation Date
< Schema name>	MLVW_FCIS_INCH_SEG	SYNONYM	VALID	Creation Date
< Schema name>	MLVWS_FCIS_INVACC_CHURN	SYNONYM	VALID	Creation Date
< Schema name>	MLVWS_FCIS_INCH_RISK_CAT	SYNONYM	VALID	Creation Date
< Schema name>	MLVWS_FCIS_INCH_SEG	SYNONYM	VALID	Creation Date
< Schema name>	MLTW_FCIS_INCH_TXNINFO_TEMP	TABLE	VALID	Creation Date
< Schema name>	MLTW_FCIS_INCH_RATE_TEMP	TABLE	VALID	Creation Date
< Schema name>	MLTW_FCIS_INCH_INVINFO_TEMP	TABLE	VALID	Creation Date
< Schema name>	MLTW_FCIS_INCH_JOBSTAT_TEMP	TABLE	VALID	Creation Date

#### 6.4.2 Validate database link credentials

1. Execute the following SQL query in FLEXCUBE database

```
select Count(1) as COUNT from MLTB_FCIS_INCH_PROCESSTATUS@FCISML
```

2. It should produce following result

COUNT
0

#### 6.4.3 Validate FLEXCUBE menu

1. Execute the following SQL query in FLEXCUBE database

```
select LANG_CODE,FUNCTION_ID,MAIN_MENU,SUB_MENU_1,SUB_MENU_2 ,
RAD_FUNCTION_ID
from smtb_function_description
where function_id in ('MLDINCHP','MLSINCHP','MLDINCHB','MLSINCHS')
```

2. It should produce following result

LANG_CODE	FUNCTION_ID	MAIN_MENU	SUB_MENU_1	SUB_MENU_2	RAD_FUNCTION_ID
ENG	MLDINCHP	ML	Detail	Model Administration Detail	MLDINCHP
ENG	MLSINCHP	ML	Summary	Model Administration Summary	MLDINCHP
ENG	MLDINCHB	ML	Detail	Model Analysis Detail	MLDINCHB
ENG	MLSINCHS	ML	Summary	Customer Attrition Summary	MLSINCHS



Installer FCIS Machine Learning Setup  
[July] [2020]  
Version 12.1.0.8.1  
Oracle Financial Services Software Limited  
Oracle Park  
Off Western Express Highway  
Goregaon (East)  
Mumbai, Maharashtra 400 063  
India

Worldwide Inquiries:  
Phone: +91 22 6718 3000  
Fax: +91 22 6718 3001

<https://www.oracle.com/industries/financial-services/index.html>

Copyright © [2020], Oracle and/or its affiliates. All rights reserved.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

**U.S. GOVERNMENT END USERS:** Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited. The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.