

Installation and Setup Guide
Oracle FLEXCUBE Investor Servicing
Release 12.4.0.0.0
[May] [2017]



Table of Contents

1. PREFACE	1-1
1.1 AUDIENCE	1-1
1.2 RELATED DOCUMENTS.....	1-1
1.3 CONVENTIONS	1-1
2. INTRODUCTION	2-1
2.1 HOW TO USE THIS GUIDE	2-1
3. PRE-REQUISITES	3-1
3.1 JDK.....	3-1
3.1.1 License Information.....	3-1
3.1.2 Instructions	3-1
3.2 APACHE ANT 1.7.1	3-1
3.2.1 License Information.....	3-1
3.2.2 Download Instructions.....	3-1
3.2.3 Post Download Instructions.....	3-1
3.3 ACTIVEX SETTINGS:	3-1
3.4 MSXML:.....	3-1
3.5 ORACLE CLIENT (DATABASE INSTALLATION)	3-1
3.6 SWING LAYOUT	3-2
3.6.1 License Information.....	3-2
3.6.2 Download Instructions.....	3-2
3.6.3 Post Download Instructions.....	3-2
3.7 LOG4J 1.2.15.....	3-2
3.7.1 License Information.....	3-2
3.7.2 Download Instructions.....	3-2
3.7.3 Post Download Instructions.....	3-2
3.8 ORACLE 11G DATABASE DRIVER (11.1.0.7) (DATABASE INSTALLATION)	3-2
3.8.1 License Information.....	3-2
3.8.2 Download Instructions:	3-3
3.9 SETUP FOR INSTALLER OPEN DEVELOPMENT APPLICATIONS	3-3
3.9.1 Step1	3-3
3.9.2 Step2	3-3
3.9.3 Step 3	3-4
3.9.4 Step 4	3-5
3.9.5 Step 5	3-6
4. OPEN DEVELOPMENT TOOL 11.1 INSTALLATION	4-1
4.1 WAR FILE GENERATION.....	4-1
4.1.1 Step 1	4-1
4.1.2 Step 2	4-1
4.1.3 Step 3	4-1
4.1.4 Step 4	4-2
5. HOW TO RUN INSTALLER.....	5-1
6. TROUBLESHOOTING.....	6-1
6.1 CHECKING LOGS.....	6-1
7. DEPLOYMENT OF WAR FILE TO APPLICATION SERVER.....	7-1
7.1 APACHE TOMCAT 5.5 SERVER	7-1

7.1.1	Step 1	7-1
7.1.2	Step 2	7-1
7.1.3	Step 3	7-2
7.1.4	Step 4	7-3
7.1.5	Step 5	7-4
7.1.6	Step 6	7-5
7.2	OC4J APPLICATION SERVER	7-5
7.2.1	Step 1	7-6
7.2.2	Step 2	7-7
7.2.3	Step 3	7-8
7.2.4	Step 4	7-9
7.2.5	Step 5	7-10
7.2.6	Step 6	7-11
7.2.7	Step 7	7-12
7.2.8	Step 8	7-13
7.2.9	Step 9	7-14
7.2.10	Step 10	7-14
7.2.11	Step 11	7-15
7.2.12	Step 12	7-15
7.2.13	Step 13	7-18
7.2.14	Step 14	7-18
7.2.15	Step 15	7-19
7.2.16	Step 16	7-20
7.2.17	Step 17	7-21
7.2.18	Step 18	7-22
7.2.19	Step 19	7-23
7.2.20	Step 20	7-24
7.3	WEBLOGIC APPLICATION SERVER	7-24
7.3.1	Step 1	7-26
7.3.2	Step 2	7-27
7.3.3	Step 3	7-28
7.3.4	Step 4	7-29
7.3.5	Step 5	7-29
7.3.6	Step 6	7-30
7.3.7	Step 7	7-31
7.3.8	Step 8	7-32
7.3.9	Step 9	7-33
7.3.10	Step 10	7-34
7.3.11	Step 11	7-35
7.3.12	Step 12	7-36
7.3.13	Step 13	7-37
7.3.14	Step 14	7-38
7.3.15	Step 15	7-39
7.3.16	Step 16	7-40
7.3.17	Step 17	7-41
7.3.18	Step 18	7-42
8.	IE SETTINGS	8-1
9.	ADMINISTRATION	9-1
9.1	USER ROLES	9-1
9.1.1	System Administrator	9-1
9.1.2	Release Administrator	9-1
9.1.3	Developer	9-1
9.2	RELEASE DEFINITION	9-2
9.3	ENVIRONMENT CREATION	9-4
9.3.1	User Definition	9-5

10.	DEVELOPER CHECK LIST	10-1
------------	-----------------------------------	-------------

1. Preface

This document provides the steps to install extensible Open Development tool and initial administration activities.

1.1 Audience

This document is intended for FLEXCUBE IS Application developers who are required to the following:

- Install and setup Open Development Tool development environment

1.2 Related documents


For more information, see following documents.

- Development Overview Guide.docx
- Getting Started.docx
- Reference.docx

1.3 Conventions

The following text conventions are used in this document:

Convention Meaning

boldface	Boldface type indicates graphical user interface elements (for example, menus and menu items, buttons, tabs, dialog controls), including options that you select.
<i>italic</i>	italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates language and syntax elements, directory and File name, URLs, text that appears on the screen, or text that you enter.
	Indicates important information

2. Introduction

This document is a guide for installation of Open Development Tool Version 11.1. Detailed steps have been mentioned for generation of WAR file from the Open Development Tool Source and deployment of Open Development Tool application to Apache Tomcat and OC4J server.

2.1 How to Use This Guide

The information in this guide includes:

- [Chapter 2, "Introduction"](#)
- [Chapter 3, "Pre-requisites"](#)
- [Chapter 4, "Open Development Tool 11.1 installation"](#)
- [Chapter 5, "How to run Installer"](#)
- [Chapter 6, "Troubleshooting"](#)
- [Chapter 7, "How to deploy WAR file"](#)
- [Chapter 8, "IE settings"](#)
- [Chapter 9, "Administration"](#)
- [Chapter 10, "Developer check list"](#)

3. Pre-requisites

3.1 JDK

3.1.1 License Information

JDK is distributed by Sun Microsystems, Inc under Java Development Kit Binary Code License Agreement.

3.1.2 Instructions

Installer requires JDK 1.6 update 16 version to be downloaded in the system and the same should be set as environmental variable (explained later in this document).

3.2 Apache Ant 1.7.1

3.2.1 License Information

Apache License version 2.0. This is available for reference at <http://www.apache.org/licenses/LICENSE-2.0>

3.2.2 Download Instructions

Apache Ant 1.7.1 is available in the archives at <http://www.apache.org/dist/ant/binaries/>
The file to be downloaded is **apache-ant-1.7.1-bin.zip**.

3.2.3 Post Download Instructions

Extract the apache-ant-1.7.1-bin.zip distribution to a directory. And provide this path for setting the environmental variable which is explained later in this document.

3.3 ActiveX settings:

Tools -> Internet Options -> Security -> Local intranet -> Custom Level -> ActiveX controls and Plug-ins -> Initialize and script ActiveX controls not marked as safe -> Select Enable.

3.4 Msxml:

Msxml 4.0 to be available on client machine.

3.5 Oracle Client (Database Installation)

In order to carry out Database Installation, Installer requires **Oracle 11g Client** or later version to be installed in the system.

3.6 Swing Layout

3.6.1 License Information

Lesser General Public License (LGPL 2.1)

3.6.2 Download Instructions

Swing Layout is available in the archives at <https://swing-layout.dev.java.net/> . In the website under 'project tools' section, select 'Documents and files' section. The file to be downloaded is **swing-layout-1.0.jar**.

3.6.3 Post Download Instructions

Extract the Swing-layout-1.0 distribution to a directory. Copy the following file

swing-layout-1.0.jar

Into the directory {INSTALLER_DIR}\lib

3.7 Log4J 1.2.15

3.7.1 License Information

Apache License 2.0. This is available for reference at <http://www.apache.org/licenses/LICENSE-2.0>

3.7.2 Download Instructions

Log4j 1.2.15 is available in the archives at <http://archive.apache.org/dist/logging/log4j/1.2.15/> .The file to be downloaded is **apache-log4j-1.2.15.zip**.

3.7.3 Post Download Instructions

Extract the Log4j 1.2.15 distribution to a directory. Copy the following file

log4j-1.2.15.jar

Into the directory {INSTALLER_DIR}\lib

3.8 Oracle 11g Database Driver (11.1.0.7) (Database Installation)

3.8.1 License Information

Oracle Corporation

3.8.2 Download Instructions:

ojdbc6.jar is available in the archives at

http://www.oracle.com/technology/software/tech/java/sqlj_jdbc/htdocs/jdbc_111060.html

The file to be downloaded is **ojdbc6.jar**.

Post Download Instructions:

Extract the ojdbc6.jar distribution to a directory. Copy the following file

ojdbc6.jar

Into the directory {INSTALLER_DIR}\lib


3.9 Setup for installer Open Development Applications

3.9.1 Step1

Navigate to Control Panel


3.9.2 Step2

Double Click System icon to launch System Properties screen as shown below.

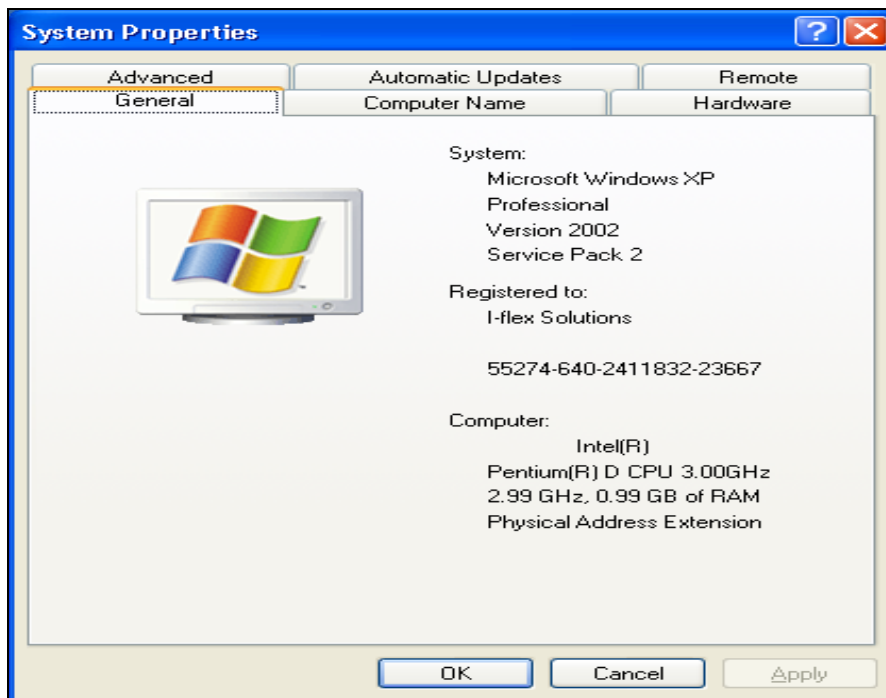



3.9.3 Step 3

Click Advanced Tab button and then click Environment Variables as shown below.

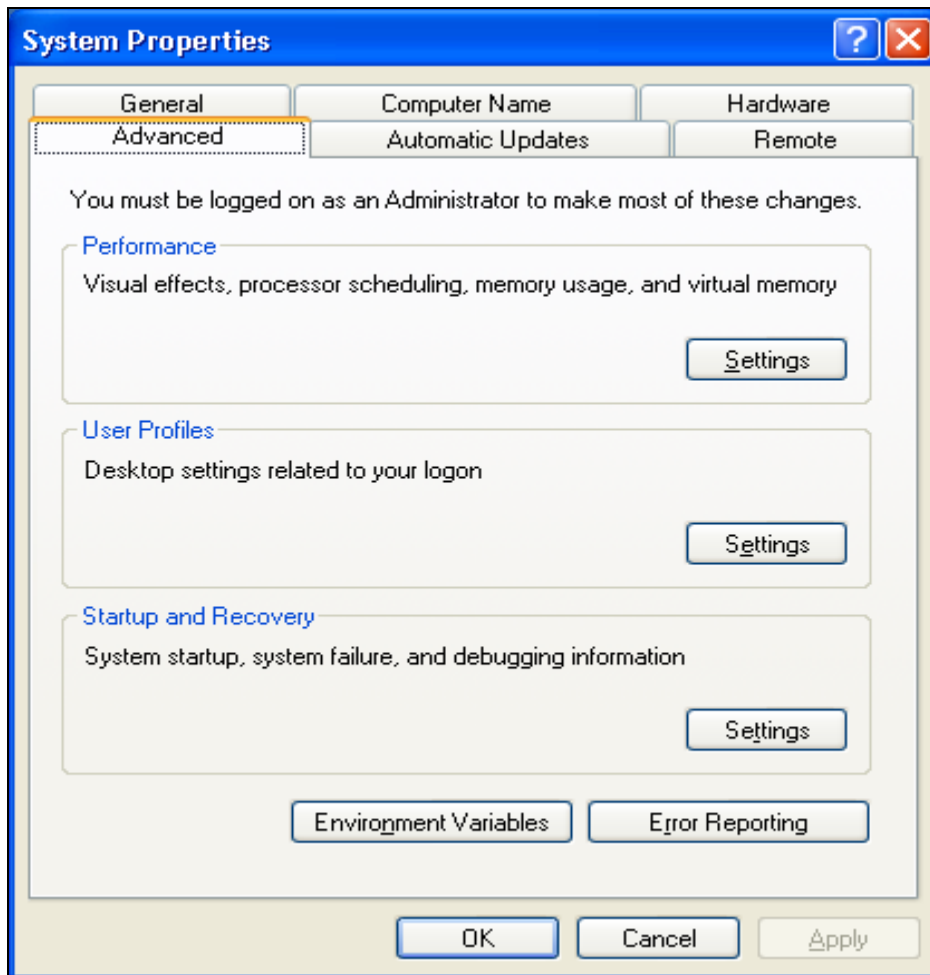

3.9.4 Step 4



In User variables click New and in Variable name type **RAD_ANT_HOME**. In the value field give the path of Apache Ant root directory as shown below.

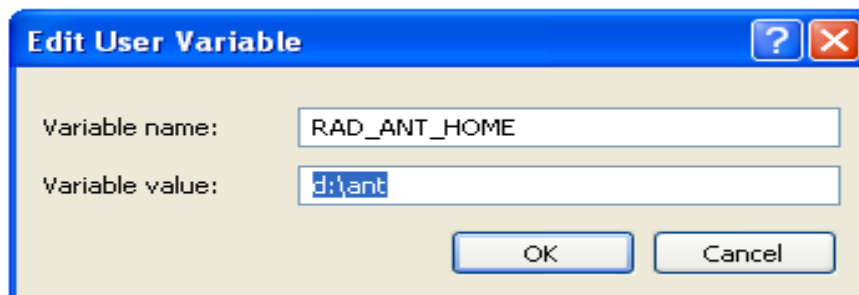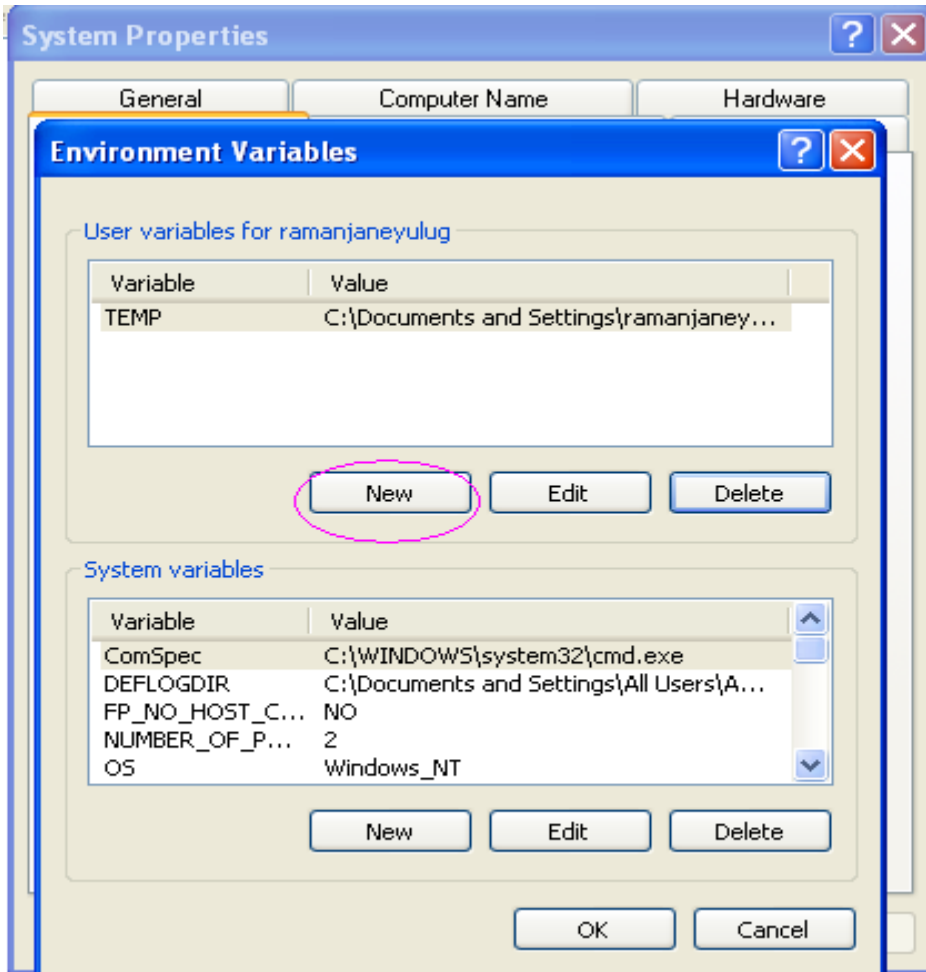

The Ant provider supported by Installer is Apache and the version should be 1.7.1.

3.9.5 Step 5

Repeat **Step 4** and **Step 5** to set **RAD_JAVA_HOME** environment variable to jdk directory as shown below.

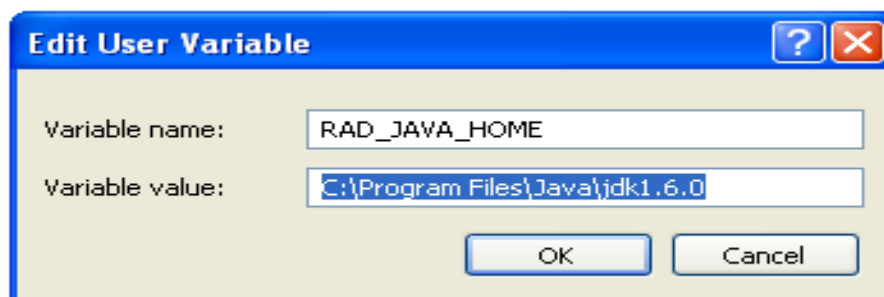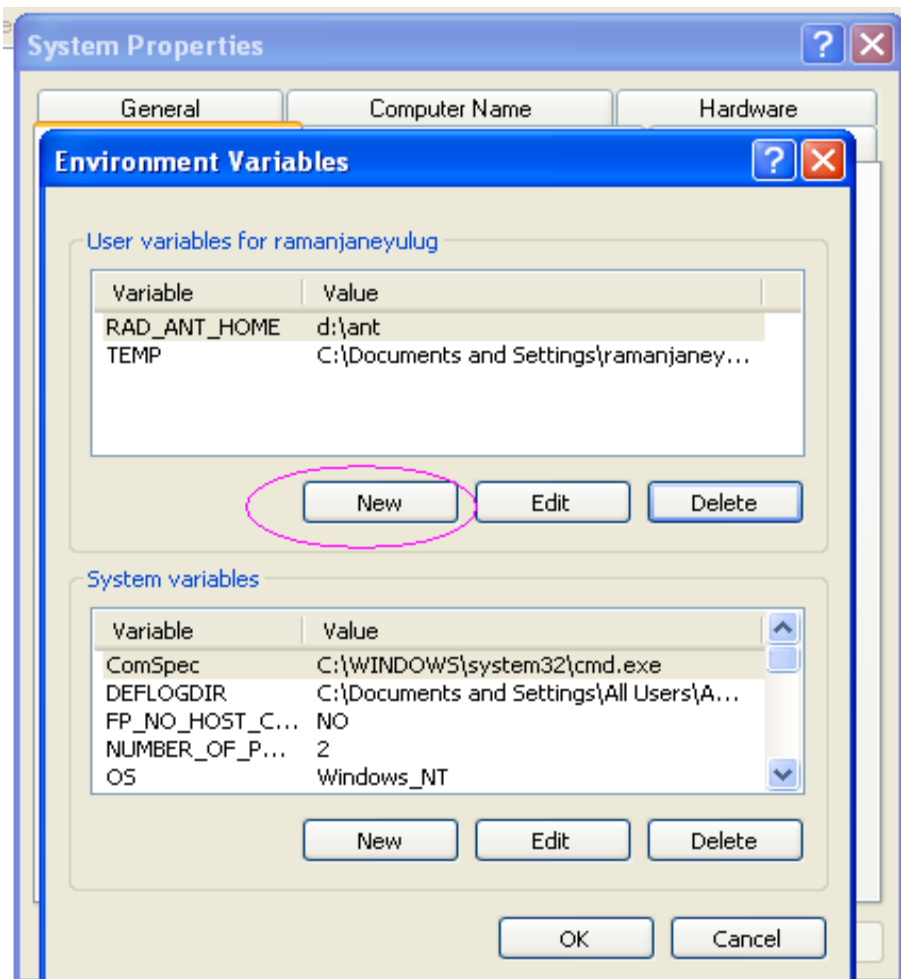

Ensure that the Variable value for Variable name RAD_JAVA_HOME eliminates space

4. Open Development Tool 11.1 Installation

Open Development Tool 11.1 installation includes below mentioned activities

- Deployment of Front-end Units or WAR File to Apache Tomcat or OC4J Server
- Loading of Back-end units(PLSQL Packages) to an existing FCUBS schema in Oracle Database
- RADTool.properties file configuration

The next section explains these two activities in detail

4.1 WAR File generation

To generate WAR file follow the below mentioned steps

4.1.1 Step 1


Copy all the contents from [\\IFLBLW-BPD-12\Vercon_IP-BPD-01\SOFT\FLEXCUBE_Kernel\FC_IS_V.UM_11.1.0.0.0.0\TOOLS\RAD\SOURCE\](#)

To RADTool_11.1

4.1.2 Step 2

RADTool. Properties file configuration

Open RADTool.properties file from **RADTool_11.1** folder. Refer the screen shot shown below and enter appropriate values

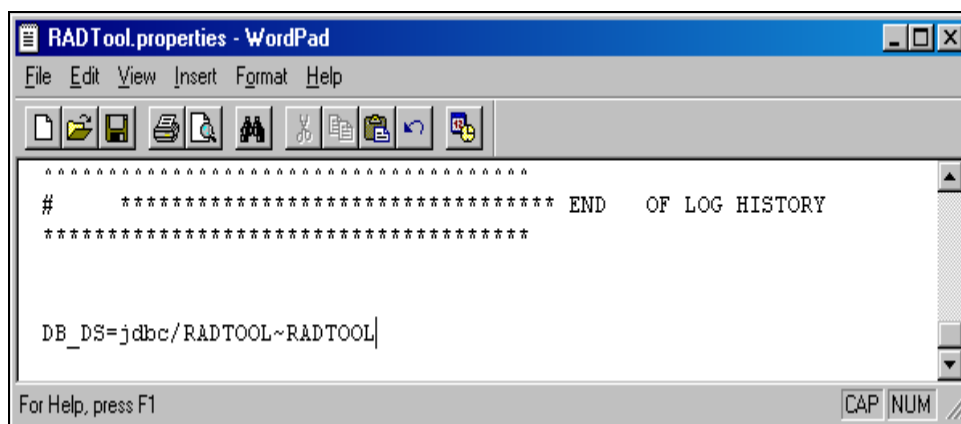

4.1.3 Step 3

Open Web.xml add the JNDI reference for backend Database.

Ex: **<resource-ref>**

<res-auth>Container</res-auth>

<res-ref-name>jdbc/RADTOOL</res-ref-name>

<res-type>javax.sql.DataSource</res-type>

</resource-ref>

4.1.4 Step 4

Please Use the Installer To Prepare Warfile.

Installer sources will be available in the following location.

\\IFLBLW-BPD-12\Vercon_IP-BPD-01\SOFT\FLEXCUBE_Kernel\FC_IS_V.UM_11.1.0.0.0.0\TOOLS\RAD\INSTALLER\SOURCE

5. How to Run Installer

After copying the installer sources and library folder to your local system, make sure you uncheck the read only check box in source properties and apply the same to all the sub folders.


The screen shot below shows how the source folder in your local system should look like.


To run the installer, double click the batch file (RADInstaller11.1.bat) present in the installer source.




RADInstaller11.1.bat

This displays the screen as follows.

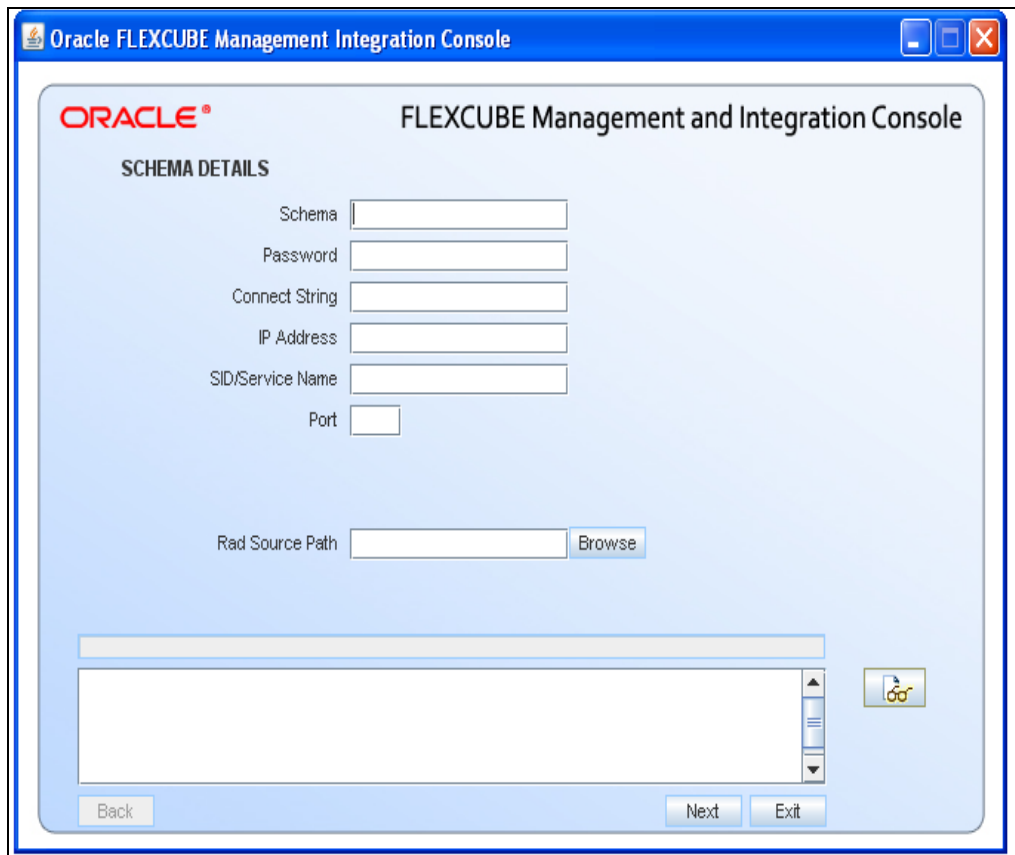A screenshot of the Oracle FLEXCUBE Management Integration Console window. The window has a blue title bar with the text "Oracle FLEXCUBE Management Integration Console". The main area has a light blue background with the Oracle logo and the title "FLEXCUBE Management and Integration Console". Under the heading "SCHEMA DETAILS", there are several input fields: "Schema", "Password", "Connect String", "IP Address", "SID/Service Name", and "Port". Below these is a "Rad Source Path" field with a "Browse" button next to it. At the bottom, there is a large empty text area, a "Back" button, and "Next" and "Exit" buttons. A small icon of a notepad with a gear is visible on the right side of the main area.

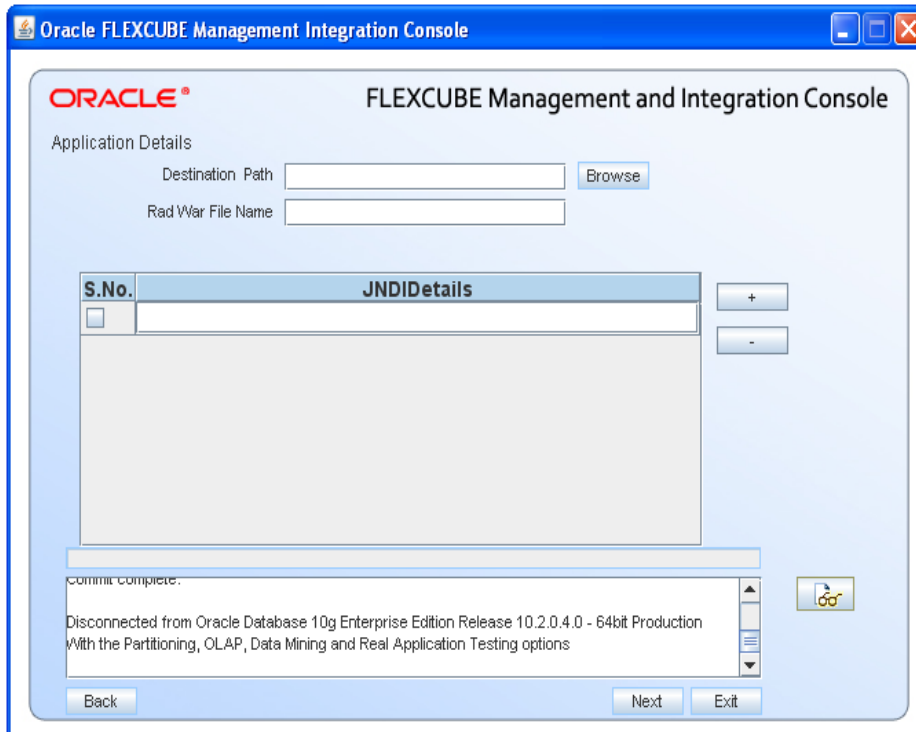

If you want create the war component, please enter the Destination path and War file Name otherwise it will compile only db object display the screen as follows

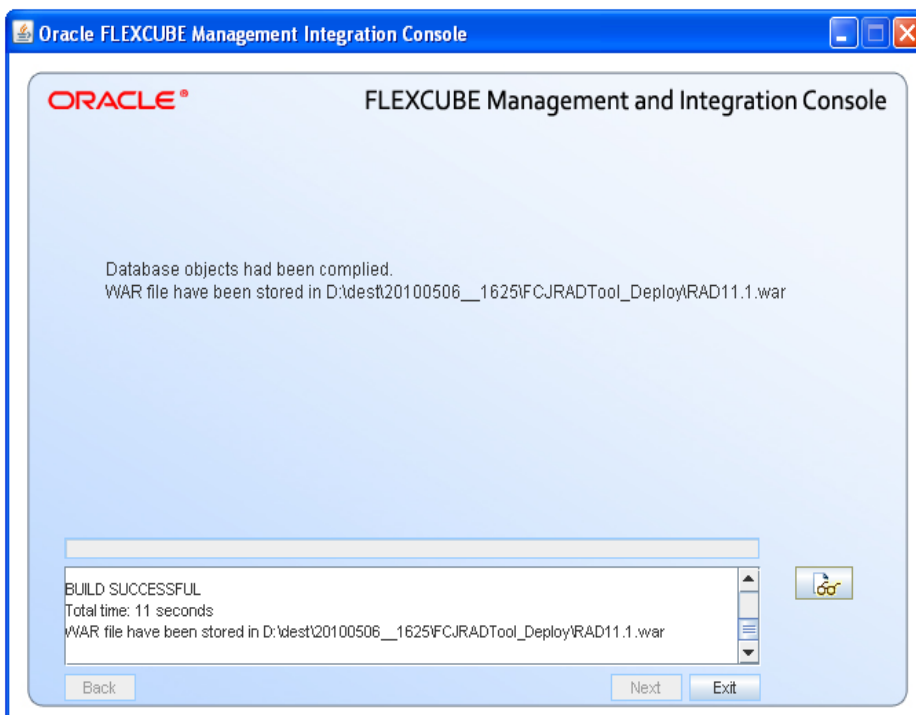


After generation of war file you can deploy war file in Application Server /Web server from destination path.

6. Troubleshooting


6.1 Checking Logs


In case an error occurs while doing a particular Open Development activity and the user wants to know the exception, he can look at the log file which contains detailed information about executed and the type of error thrown if any.

To check the log file open the logs folder in the installer source of your local system.

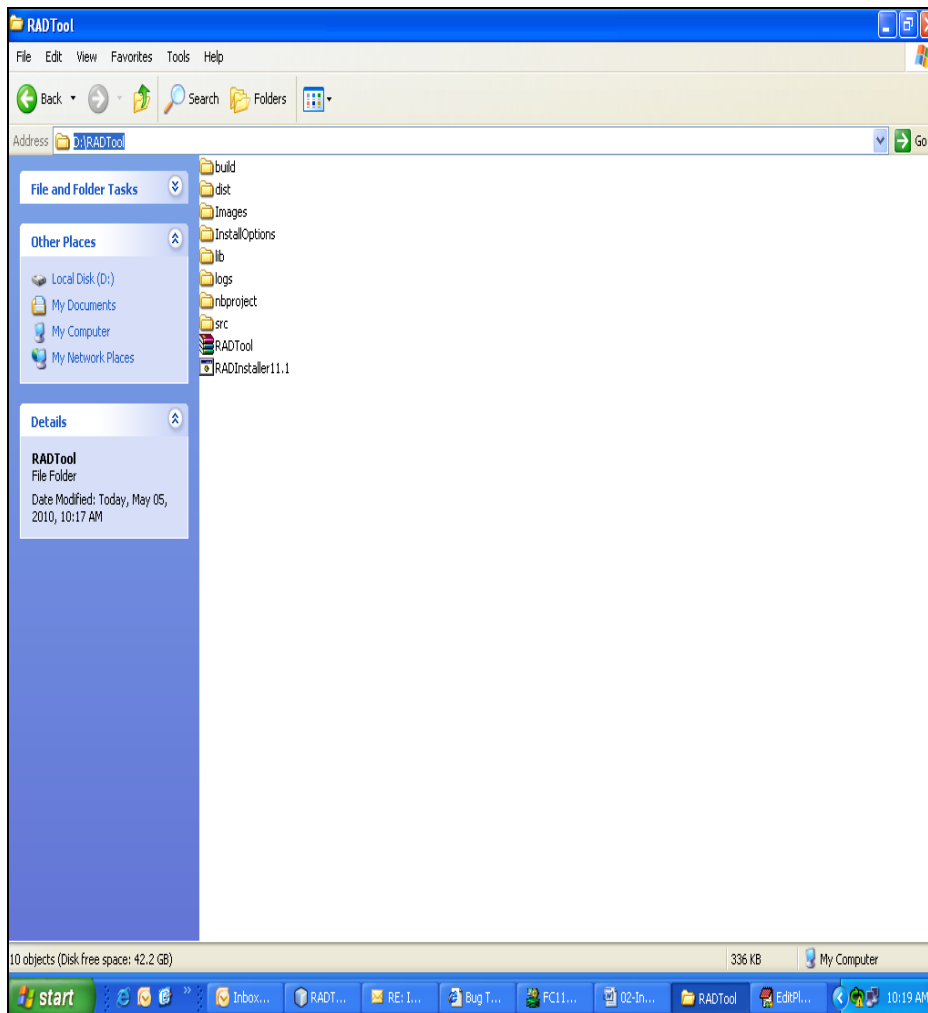

Please Enter the Open Development Schem detail where you are going to connect the Open Development schema and select the Open Development source which you are copied from vercon area and press next button .display the screen as follows

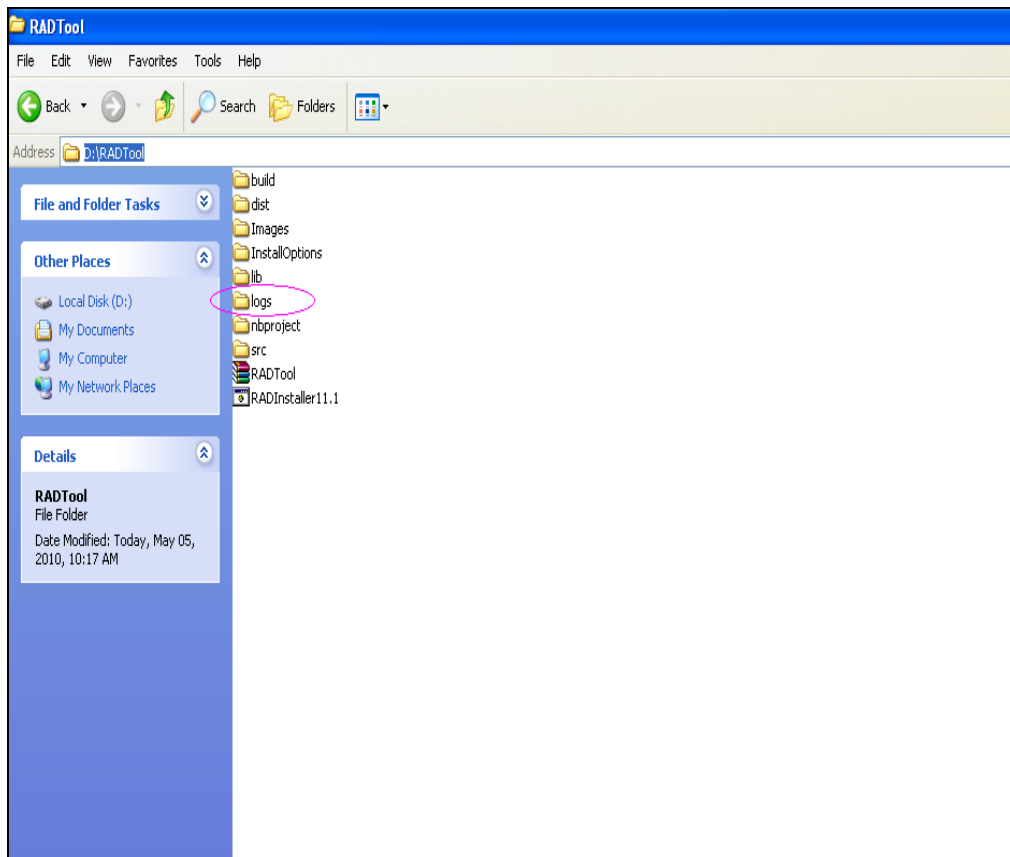

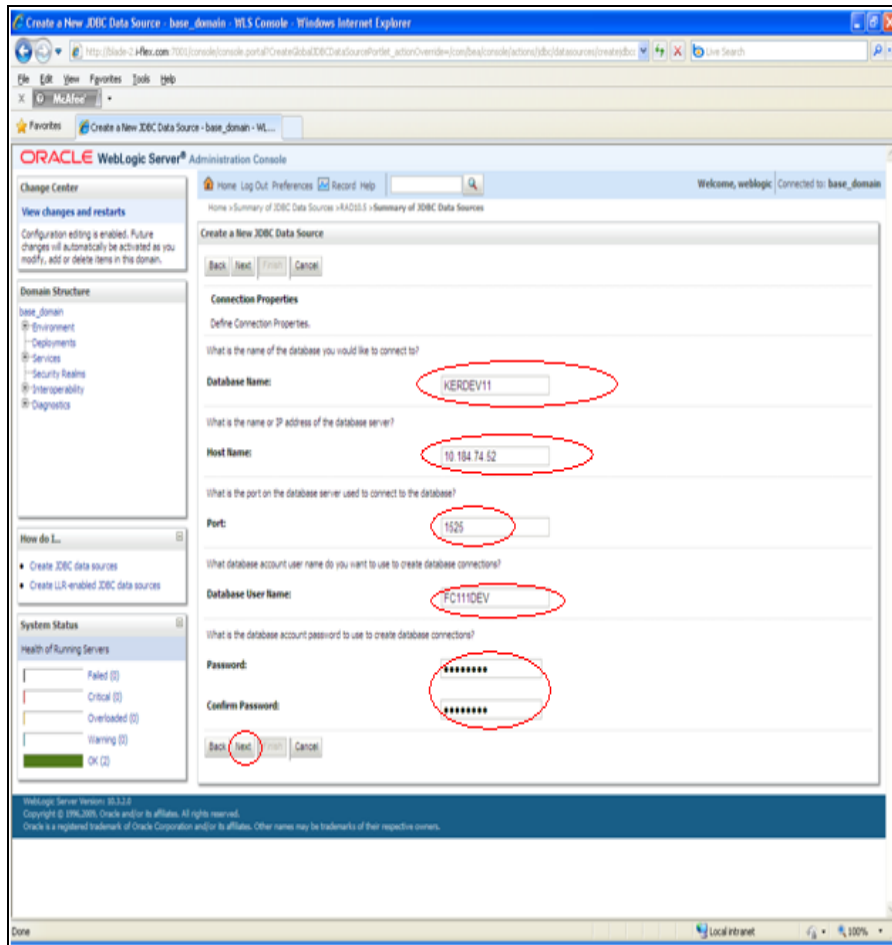

FCJRADTool.war file is generated at specified “destPath” i.e. in this case at RADTool_11.1

This completes WAR file generation and Database installation .

7. Deployment of WAR file to Application Server

7.1 Apache Tomcat 5.5 Server


To deploy **FCJRADTool.war** to Apache Tomcat 5.5 Server follow the below mentioned steps

7.1.1 Step 1

Open tomcat-users.xml from <apache-tomcat-5.5.20_home>\conf folder.

Add <user username="admin" password="admin" roles="manager,admin"/>

As shown in highlighted section of the below screenshot.

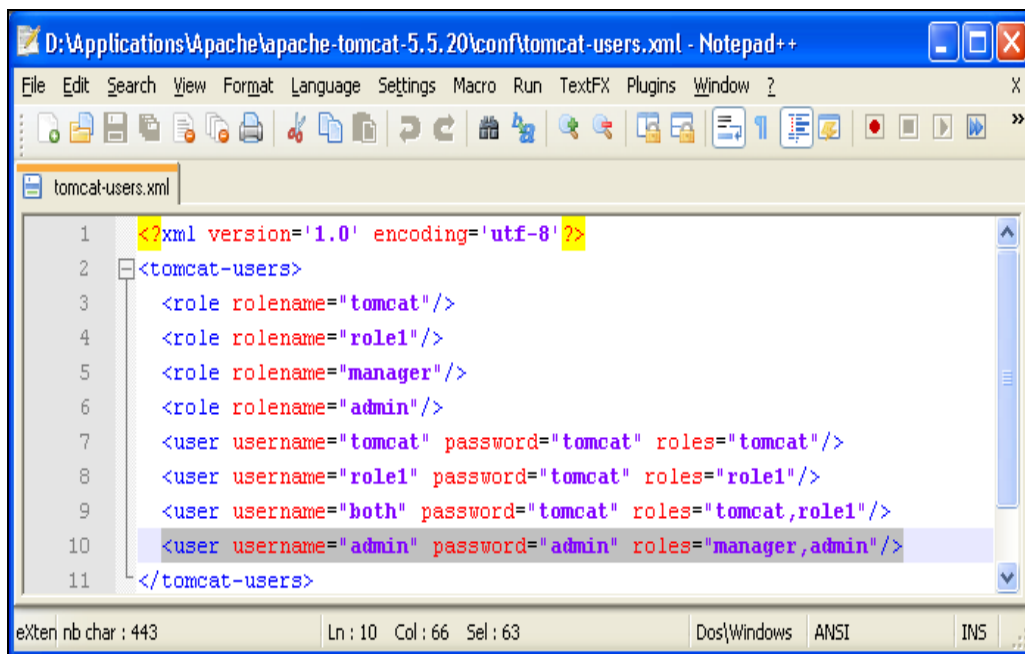


```
1 <?xml version='1.0' encoding='utf-8' ?>
2 <tomcat-users>
3   <role rolename="tomcat"/>
4   <role rolename="role1"/>
5   <role rolename="manager"/>
6   <role rolename="admin"/>
7   <user username="tomcat" password="tomcat" roles="tomcat"/>
8   <user username="role1" password="tomcat" roles="role1"/>
9   <user username="both" password="tomcat" roles="tomcat,role1"/>
10  <user username="admin" password="admin" roles="manager,admin"/>
11 </tomcat-users>
```

7.1.2 Step 2

Open Server.xml from <apache-tomcat-5.5.20_home>\conf folder.

Refer the highlighted section of screenshot below and add corresponding Datasource between <GlobalNamingResources></GlobalNamingResources> tags.

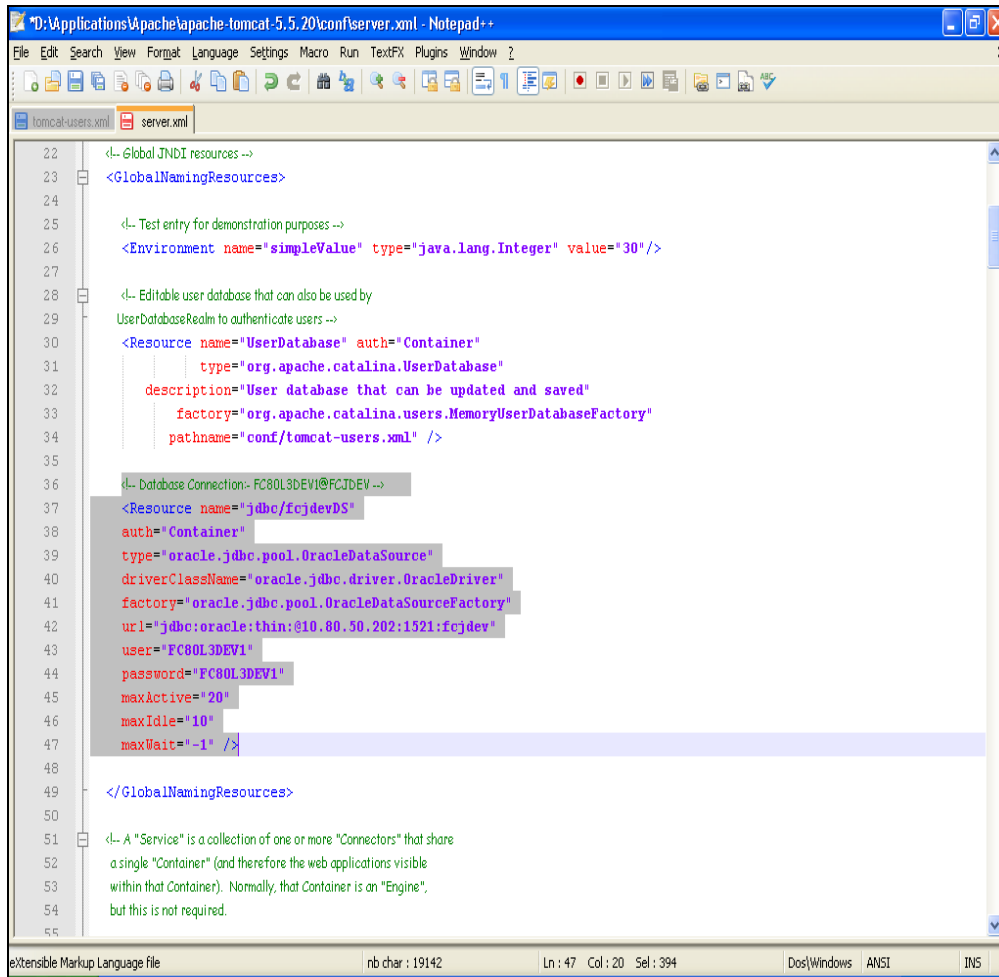


```
22 <!-- Global JNDI resources -->
23 <GlobalNamingResources>
24
25 <!-- Test entry for demonstration purposes -->
26 <Environment name="simpleValue" type="java.lang.Integer" value="30"/>
27
28 <!-- Editable user database that can also be used by
29      UserDatabaseRealm to authenticate users -->
30 <Resource name="UserDatabase" auth="Container"
31           type="org.apache.catalina.UserDatabase"
32           description="User database that can be updated and saved"
33           factory="org.apache.catalina.users.MemoryUserDatabaseFactory"
34           pathname="conf/tomcat-users.xml" />
35
36 <!-- Database Connection: FC80L3DEV1@FCJDEV -->
37 <Resource name="jdbc/fcjddevDS"
38           auth="Container"
39           type="oracle.jdbc.pool.OracleDataSource"
40           driverClassName="oracle.jdbc.driver.OracleDriver"
41           factory="oracle.jdbc.pool.OracleDataSourceFactory"
42           url="jdbc:oracle:thin:@10.80.50.202:1521:fcjddev"
43           user="FC80L3DEV1"
44           password="FC80L3DEV1"
45           maxActive="20"
46           maxIdle="10"
47           maxWait="-1" />
48
49 </GlobalNamingResources>
50
51 <!-- A "Service" is a collection of one or more "Connectors" that share
52      a single "Container" (and therefore the web applications visible
53      within that Container). Normally, that Container is an "Engine",
54      but this is not required.
55
```

7.1.3 Step 3

Open context.xml from <apache-tomcat-5.5.20_home>\conf folder.

Refer the highlighted section of screenshot below and add corresponding Resource Link

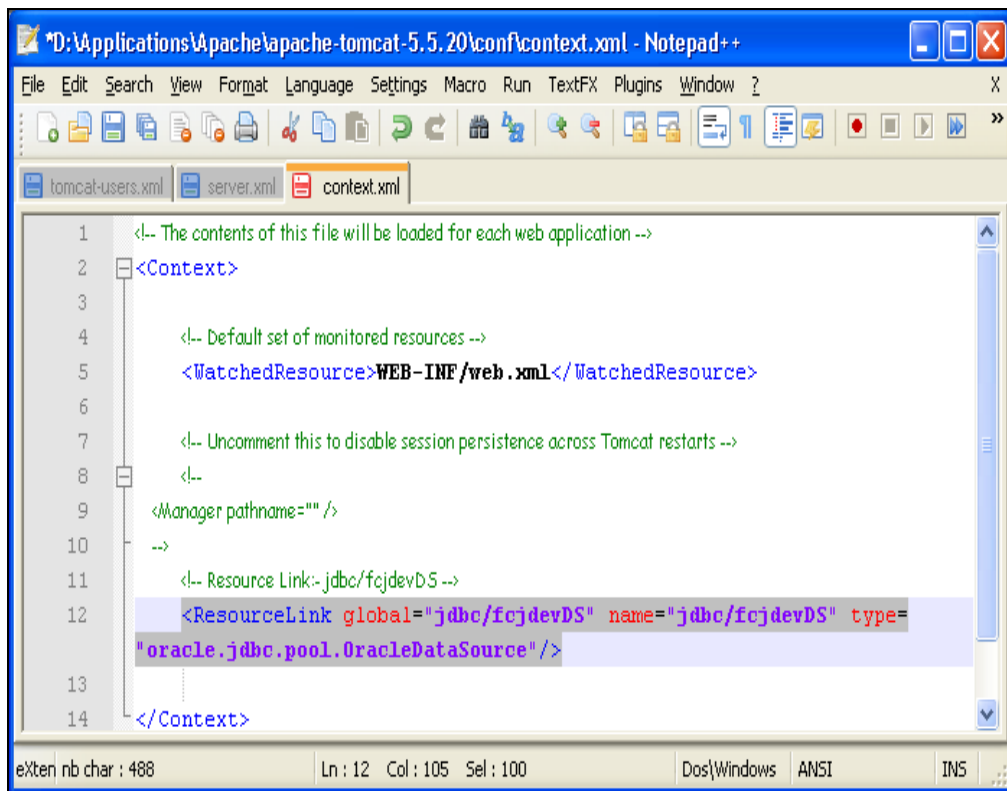

```
1 <!-- The contents of this file will be loaded for each web application -->
2 <Context>
3
4     <!-- Default set of monitored resources -->
5     <WatchedResource>WEB-INF/web.xml</WatchedResource>
6
7     <!-- Uncomment this to disable session persistence across Tomcat restarts -->
8     <!--
9     <Manager pathname="" />
10    -->
11    <!-- Resource Link:- jdbc/fcjddevDS -->
12    <ResourceLink global="jdbc/fcjddevDS" name="jdbc/fcjddevDS" type=
13    "oracle.jdbc.pool.OracleDataSource" />
14 </Context>
```


7.1.4 Step 4

Start Apache Tomcat 5.5 Server by double-clicking **startup.bat** from <apache-tomcat-5.5.20_home>\bin folder

7.1.5 Step 5


Launch Internet Explorer with URL Error! Hyperlink reference not valid.

Refer the screenshot below and enter **User Id** as **admin** and **password** as **admin**

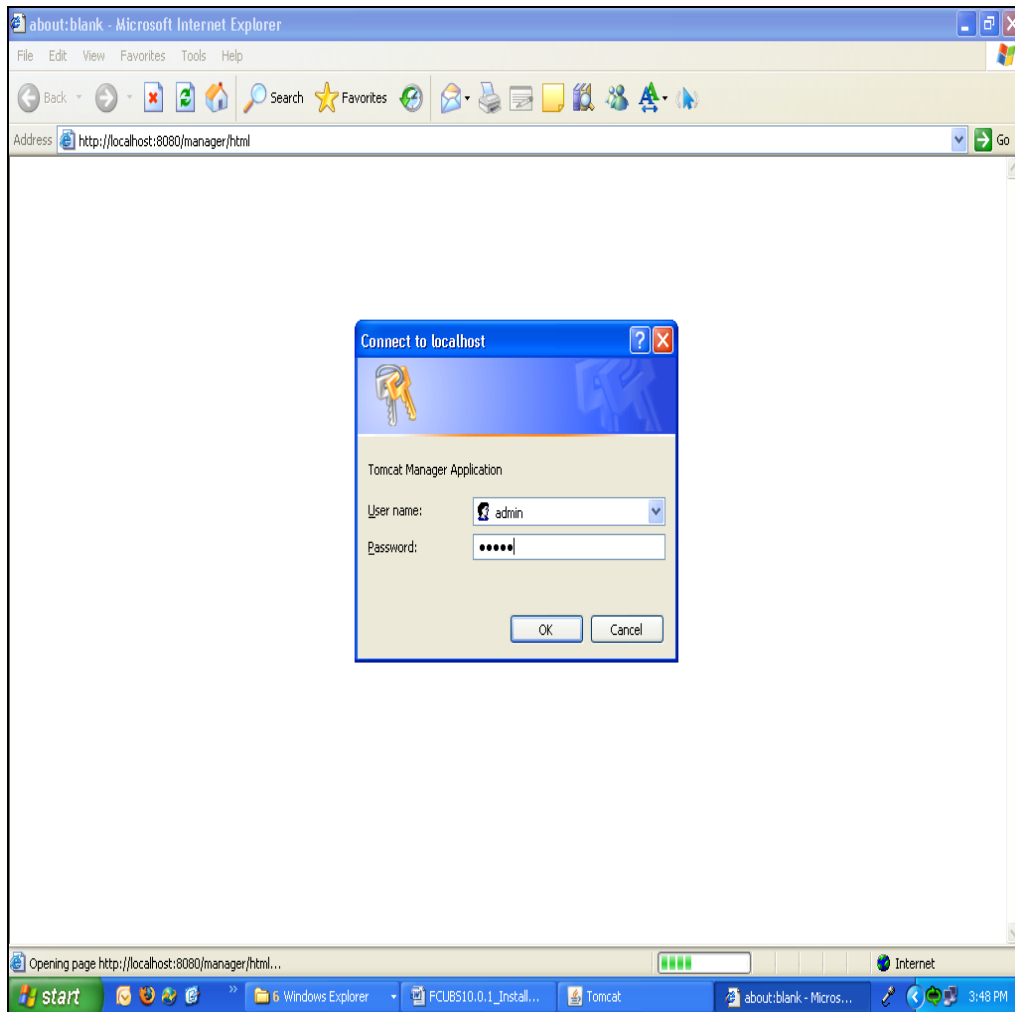

7.1.6 Step 6

Upload the generated **FCJRADTool.war** file from RADTool_11.1 folder as shown Below in the screen shot and then click **Deploy**.

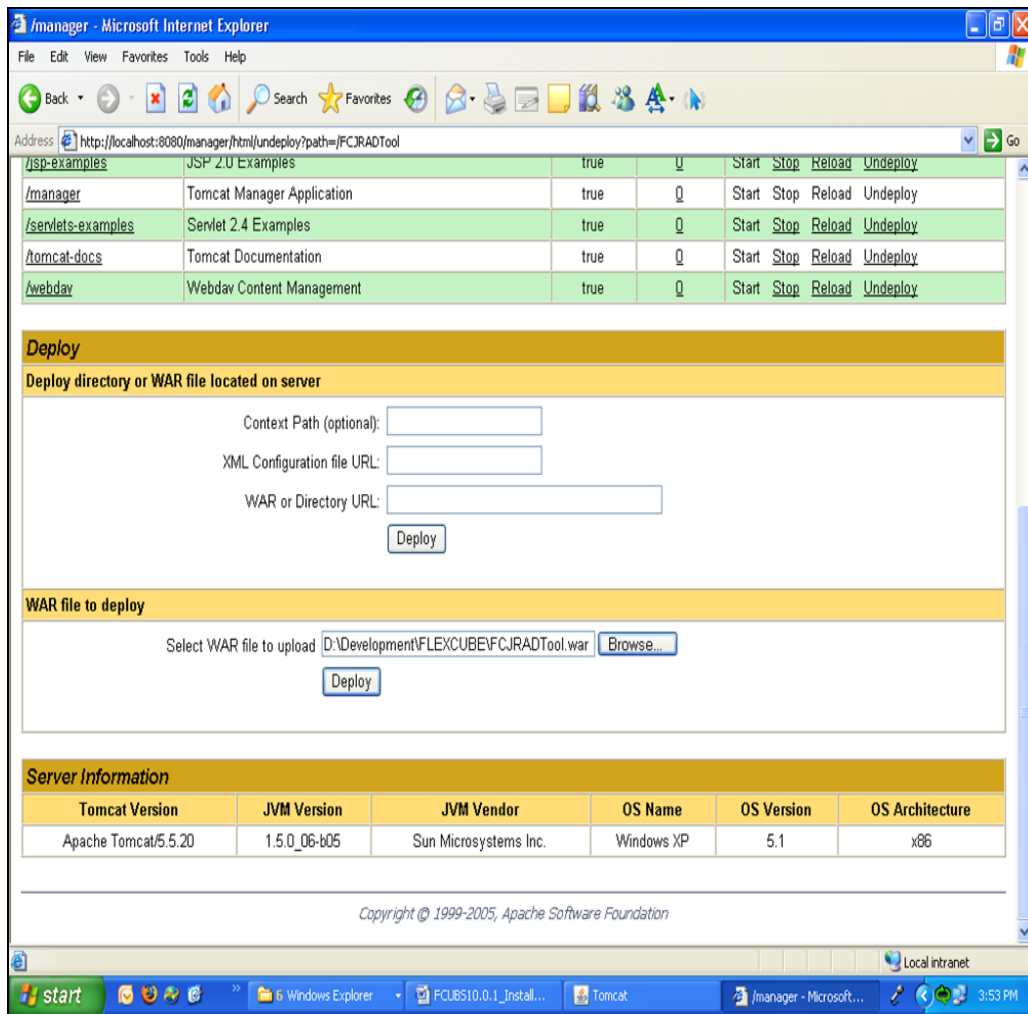

completes Deployment of FCJRADTool.war file to Apache Tomcat 5.5 Server.

RADTool 11.1 Application can be launched with the URL.


7.2 OC4J Application server

To deploy **FCJRADTool.war** to OC4J 10.1.3.X Application Server follow the below mentioned steps

Steps 1-15 explain creation of Connection Pool and Data Source. Skip these steps if Connection pool and data source already exists in the OC4J Application server.


7.2.1 Step 1

Login to Oracle 10g Application server's Administration console as shown below

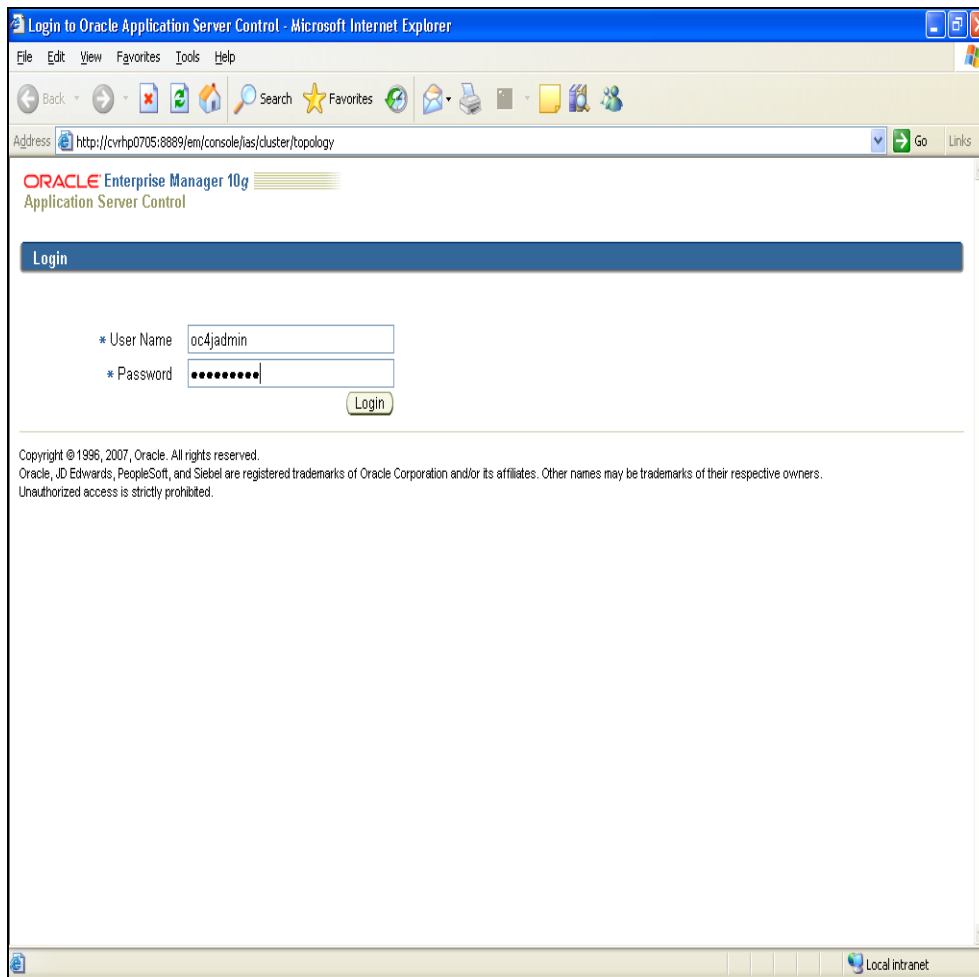

7.2.2 Step 2

Click **Home** as shown below

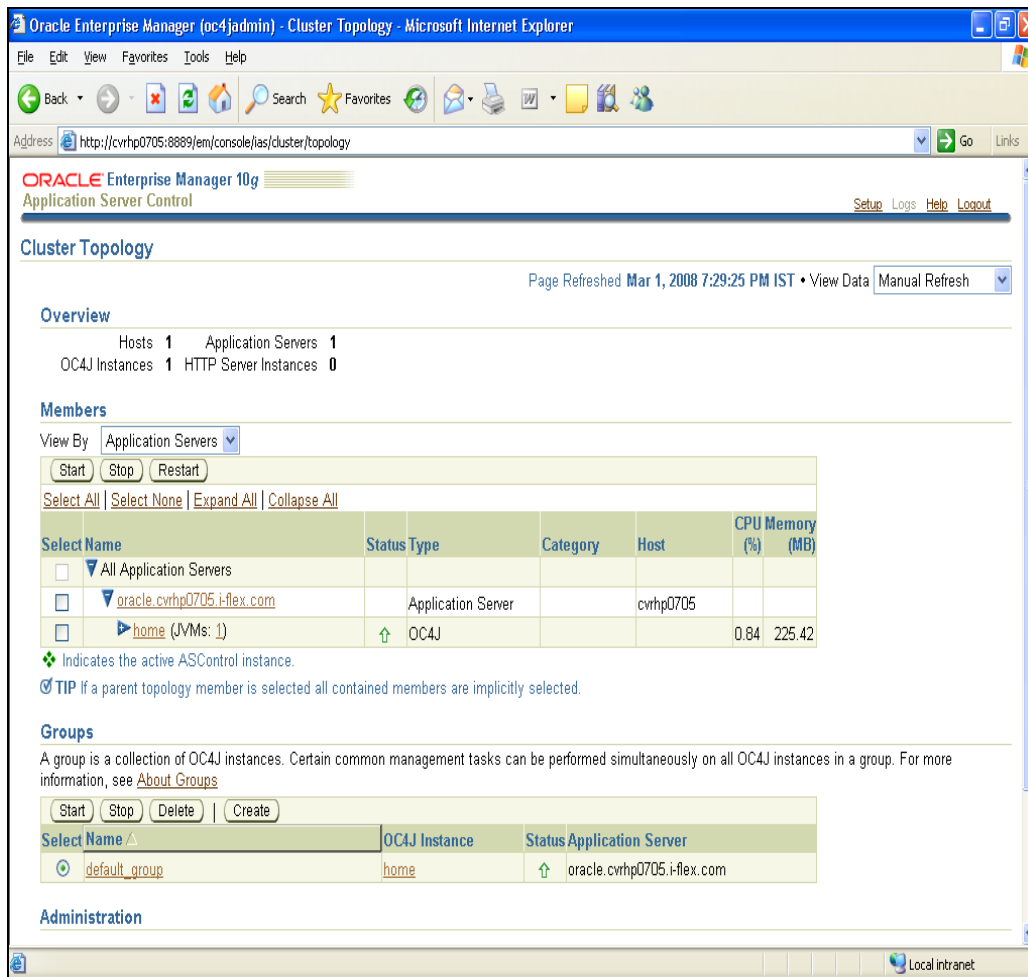

The screenshot shows the Oracle Enterprise Manager 10g Cluster Topology page in a Microsoft Internet Explorer browser. The address bar shows the URL: `http://cvrhp0705:8889/em/console/ias/cluster/topology`. The page title is "Oracle Enterprise Manager 10g - Cluster Topology - Microsoft Internet Explorer". The main content area is titled "Cluster Topology" and includes a "Page Refreshed" timestamp of "Mar 1, 2008 7:29:25 PM IST" and a "View Data" button. The "Overview" section shows statistics: Hosts 1, Application Servers 1, OC4J Instances 1, and HTTP Server Instances 0. The "Members" section is set to "View By: Application Servers" and includes a table with columns: Select, Name, Status, Type, Category, Host, CPU (%), and Memory (MB). The table lists "All Application Servers" and "oracle.cvrhp0705.i-flex.com" (Application Server). The "home (JVMs: 1)" entry is selected, showing a status of "OC4J" and CPU/Memory usage of 0.84% and 225.42 MB respectively. A "Groups" section below explains that a group is a collection of OC4J instances and provides a table with columns: Select, Name, OC4J Instance, Status, and Application Server. The "default_group" is listed with the instance "home" and application server "oracle.cvrhp0705.i-flex.com". The "Administration" section is partially visible at the bottom.

Oracle Enterprise Manager 10g
Application Server Control

Cluster Topology

Page Refreshed Mar 1, 2008 7:29:25 PM IST • View Data Manual Refresh

Overview

Hosts 1 Application Servers 1
OC4J Instances 1 HTTP Server Instances 0

Members

View By: Application Servers

Start Stop Restart

Select All | Select None | Expand All | Collapse All

Select	Name	Status	Type	Category	Host	CPU (%)	Memory (MB)
<input type="checkbox"/>	All Application Servers						
<input type="checkbox"/>	oracle.cvrhp0705.i-flex.com		Application Server		cvrhp0705		
<input checked="" type="checkbox"/>	home (JVMs: 1)	↑	OC4J			0.84	225.42

Indicates the active ASControl instance.

TIP If a parent topology member is selected all contained members are implicitly selected.

Groups

A group is a collection of OC4J instances. Certain common management tasks can be performed simultaneously on all OC4J instances in a group. For more information, see [About Groups](#)

Start Stop Delete Create

Select	Name	OC4J Instance	Status	Application Server
<input checked="" type="radio"/>	default_group	home	↑	oracle.cvrhp0705.i-flex.com

Administration

7.2.3 Step 3

Click Administration tab as shown below

The screenshot displays the Oracle Enterprise Manager 10g Application Server Control console in a Microsoft Internet Explorer browser window. The address bar shows the URL <http://cvrhp0705:8889/em/console/ias/oc4j/home>. The page title is "ORACLE Enterprise Manager 10g Application Server Control". The navigation tabs include Home, Applications, Web Services, Performance, and Administration, with the Administration tab currently selected. The page indicates it was refreshed on Mar 1, 2008 at 7:34:11 PM IST.

General

Status: **Up** (Stop Restart)

Start Time: **Mar 1, 2008 4:19:25 PM IST**

Version: **10.1.3.3.0**

Oracle Home: **D:\OracleAS_SOA**

Host: **cvrhp0705.i-flex.com**

Virtual Machines: **1**

Notifications: **0**

Response and Load

The graph shows Request Processing Time (seconds) and Requests per second over a period of 5:34 to 6:00:206:407:007:20. The y-axis ranges from 0.0 to 1.0. The legend indicates that the blue area represents Request Processing Time (seconds) and the green area represents Requests per second.

Copyright © 1996, 2007, Oracle. All rights reserved.
Oracle, JD Edwards, PeopleSoft, and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.
[About Oracle Enterprise Manager 10g Application Server Control](#)

7.2.4 Step 4

Click JDBC Resources as shown below

The screenshot shows the Oracle Enterprise Manager 10g Application Server Control console in a Microsoft Internet Explorer browser. The address bar shows the URL: <http://cvrhp0705:8889/em/console/ias/oc4j/administration>. The page title is "Oracle Enterprise Manager 10g Application Server Control". The breadcrumb navigation shows "Cluster Topology > Application Server: oracle.cvrhp0705.i-flex.com > OC4J: home". The page is refreshed on Mar 1, 2008 7:35:58 PM IST. The "Administration" tab is selected, showing a list of tasks. The tasks are organized into categories: Administration Tasks, Services, and Enterprise Messaging Service. The "JDBC Resources" task is highlighted.

Task Name	Go to Task	Description
Administration Tasks		
Properties		
EJB Compiler Settings		Configure the EJB Compiler.
J2EE Websites		Manage the J2EE websites in this OC4J instance.
JSP Properties		Set JSP container properties.
Logger Configuration		Set log levels for all Loggers.
Thread Pool Configuration		Configure the thread pools of this OC4J instance.
Shared Libraries		Manage the shared libraries of this OC4J instance.
Server Properties		Configure server properties for this OC4J instance.
Services		
JDBC Resources		Create/delete/view data sources and connection pools.
Enterprise Messaging Service		
JMS Destinations		Create/delete/edit JMS destinations.
JMS Connection Factories		Configure JMS connection factories.
In-Memory and File Based Persistence		Configure settings for in-memory and file based persistence.
Database Persistence		Configure settings for database persistence.
OracleAS JMS Router		Configure the JMS Router.

7.2.5 Step 5

Click Create Connection Pool as shown below

The screenshot shows the Oracle Enterprise Manager (oc4jadmin) - JDBCs Resources page in a Microsoft Internet Explorer browser. The address bar shows the URL: http://cvrhp0705:8889/em/console/ias/oc4j/admin/jdbc?infoKey=1d4_11869f8fa97. The page is titled "JDBCs Resources" and shows a "Page Refreshed Mar 1, 2008 7:37:19 PM IST".

Under the "Data Sources" section, there is a "Create" button and a table listing existing data sources. The table has columns: Name, Application, JNDI Location, Connection Pool, Managed by OCAJ, Test Connection, and Delete. The data sources listed are:

Name	Application	JNDI Location	Connection Pool	Managed by OCAJ	Test Connection	Delete
"BPESamplesDataSource"	default	jdbc/BPESamplesDataSource	"BPELPM_CONNECTION_POOL"	✓		
"BPEServerDataSource"	default	jdbc/BPEServerDataSource	"BPELPM_CONNECTION_POOL"	✓		
"BPEServerDataSourceWorkflow"	default	jdbc/BPEServerDataSourceWorkflow	"BPELPM_CONNECTION_POOL"	✓		
"ESBDataSource"	default	jdbc/esb	"ESBPool"	✓		
"OracleDS"	default	jdbc/OracleDS	"Example Connection Pool"	✓		

Under the "Connection Pools" section, there is a "Create" button and a table listing existing connection pools. The table has columns: Name, Application, Connection Factory Class, Monitor Performance, Test Connection, Refresh Connection Pool, and Delete. The connection pools listed are:

Name	Application	Connection Factory Class	Monitor Performance	Test Connection	Refresh Connection Pool	Delete
"BPELPM_CONNECTION_POOL"	default	oracle.lite.pool.jdbc.POLJDBCdriver				
"ESBPool"	default	oracle.lite.pool.jdbc.POLJDBCdriver				
"Example Connection Pool"	default	oracle.jdbc.pool.OracleDataSource				

At the bottom of the page, there are links for Setup, Logs, Help, and Logout. Copyright information is also displayed: Copyright © 1996, 2007, Oracle. All rights reserved. Oracle, JD Edwards, PeopleSoft, and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners. About Oracle Enterprise Manager 10g Application Server Control.

7.2.6 Step 6

Click **Continue** as shown below

The screenshot shows the Oracle Enterprise Manager 10g Application Server Control interface in a Microsoft Internet Explorer browser window. The title bar reads "Oracle Enterprise Manager (oc4jadmin) - Create Connection Pool - Application - Microsoft Internet Explorer". The address bar shows the URL: <http://cvrhp0705:8889/em/console/ias/oc4j/jdbc/createCPAppChoice?app=>. The page header includes the Oracle logo, "Enterprise Manager 10g", and "Application Server Control". Navigation links for "Setup", "Logs", "Help", and "Logout" are present. The breadcrumb trail is: [Cluster Topology](#) > [Application Server: oracle.cvrhp0705.i-flex.com](#) > [OC4J: home](#) > [JDBC Resources](#) >. The main heading is "Create Connection Pool - Application". There are "Cancel" and "Continue" buttons at the top right. The "Application" section has the instruction "Select the application to which this new connection pool is to be added." and a dropdown menu for "Application" with "default" selected. The "Connection Pool Type" section has two radio buttons: "New Connection Pool" (selected) and "New Connection Pool from Existing Connection Pool". Below the second radio button is the instruction "Create a new connection pool that is configured like an existing connection pool." and a dropdown menu for "Existing Connection Pool" with "BPCLPM_CONNECTION_POOL" selected. There are "Cancel" and "Continue" buttons at the bottom right. The footer contains copyright information: "Copyright © 1996, 2007, Oracle. All rights reserved. Oracle, JD Edwards, PeopleSoft, and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners." and a link to "About Oracle Enterprise Manager 10g Application Server Control". The status bar at the bottom shows "Done" and "Local intranet".

7.2.7 Step 7

Refer the screen shots shown below. Provide equivalent information and click Finish

Oracle Enterprise Manager 10g
Application Server Control
Cluster Topology > Application Server: oracle.cvrhp0705.i-flex.com > OC4J: home > JDBC Resources >
Create Connection Pool

Cancel Back Finish

Page Refreshed Mar 1, 2008 7:40:18 PM IST

Home Attributes Proxy Interfaces

* Name FCUBS10.0ConnectionPool

* Connection Factory Class oracle.jdbc.pool.OracleDataSource
Class must be available to the application's class loader.

URL

You can either specify a URL directly or have it generated from connection information. When you test a connection, the connection factory class and credentials specified on this page will be used to perform the test.

☒ JDBC URL jdbc:oracle:thin:@//10.80.150.202:1521/FCJDEV Test Connection

☐ Generate URL from Connection Information Test Connection

Driver Type Thin

DB Host Name

DB Listener Port

DB Identifier Type Service Name

SID/Service Name

TNS Alias

Credentials

☒ TIP For OracleDataSources, credentials must be entered if not already specified in the URL.

Username FC80L3DEV1

Oracle Enterprise Manager 10g
Application Server Control
Cluster Topology > Application Server: oracle.cvrhp0705.i-flex.com > OC4J: home > JDBC Resources >
Create Connection Pool

Cancel Back Finish

Page Refreshed Mar 1, 2008 7:40:18 PM IST

Home Attributes Proxy Interfaces

* Name FCUBS10.0ConnectionPool

* Connection Factory Class oracle.jdbc.pool.OracleDataSource
Class must be available to the application's class loader.

URL

You can either specify a URL directly or have it generated from connection information. When you test a connection, the connection factory class and credentials specified on this page will be used to perform the test.

☒ JDBC URL jdbc:oracle:thin:@//10.80.150.202:1521/mydb.com Test Connection

☐ Generate URL from Connection Information Test Connection

Driver Type Thin

DB Host Name

DB Listener Port

DB Identifier Type Service Name

SID/Service Name

TNS Alias

Credentials

☒ TIP For OracleDataSources, credentials must be entered if not already specified in the URL.

Username FC80L3DEV1

☒ Use Cleartext Password Password

☐ Use Indirect Password Indirect Password
example: Scott, customers/Scott

Connection Factory Properties

Specify any properties needed by the connection factory here.

Name	Value	Delete
------	-------	--------

This creates the connection pool as shown below

Oracle Enterprise Manager (oc4jadmin) - JDBC Resources - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Back Forward Stop Search Favorites

Address http://cvrhp0705:8889/em/console/ias/oc4j/admin/jdbc?infokey=1dd_11869f8a97

Application All

Data Sources

Create

Name	Application	JNDI Location	Connection Pool	Managed by OC4J	Test Connection	Delete
"BPESamplesDataSource"	default	jdbc/BPESamplesDataSource	"BPELPM_CONNECTION_POOL"	✓		
"BPEServerDataSource"	default	jdbc/BPEServerDataSource	"BPELPM_CONNECTION_POOL"	✓		
"BPEServerDataSourceWorkflow"	default	jdbc/BPEServerDataSourceWorkflow	"BPELPM_CONNECTION_POOL"	✓		
"ESBDataSource"	default	jdbc/esb	"ESBPool"	✓		
"OracleDS"	default	jdbc/OracleDS	"Example Connection Pool"	✓		

Connection Pools

Create

Name	Application	Connection Factory Class	Monitor Performance	Test Connection	Refresh Connection Pool	Delete
"BPELPM_CONNECTION_POOL"	default	oracle.lite.poljdbc.POLJDBCdriver				
"ESBPool"	default	oracle.lite.poljdbc.POLJDBCdriver				
"Example Connection Pool"	default	oracle.jdbc.pool.OracleDataSource				
"FCUBS10.0ConnectionPool"	default	oracle.jdbc.pool.OracleDataSource				

Setup | Logs | Help | Logout

Copyright © 1996, 2007, Oracle. All rights reserved.
 Oracle, JD Edwards, PeopleSoft, and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.
[About Oracle Enterprise Manager 10g Application Server Control](#)

Local intranet

7.2.8 Step 8

Click **Test Connection** as shown below

Oracle Enterprise Manager (oc4jadmin) - JDBC Resources - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Back Forward Stop Search Favorites

Address http://cvrhp0705:8889/em/console/ias/oc4j/admin/jdbc?infokey=1dd_11869f8a97

Application All

Data Sources

Create

Name	Application	JNDI Location	Connection Pool	Managed by OC4J	Test Connection	Delete
"BPESamplesDataSource"	default	jdbc/BPESamplesDataSource	"BPELPM_CONNECTION_POOL"	✓		
"BPEServerDataSource"	default	jdbc/BPEServerDataSource	"BPELPM_CONNECTION_POOL"	✓		
"BPEServerDataSourceWorkflow"	default	jdbc/BPEServerDataSourceWorkflow	"BPELPM_CONNECTION_POOL"	✓		
"ESBDataSource"	default	jdbc/esb	"ESBPool"	✓		
"OracleDS"	default	jdbc/OracleDS	"Example Connection Pool"	✓		

Connection Pools

Create

Name	Application	Connection Factory Class	Monitor Performance	Test Connection	Refresh Connection Pool	Delete
"BPELPM_CONNECTION_POOL"	default	oracle.lite.poljdbc.POLJDBCdriver				
"ESBPool"	default	oracle.lite.poljdbc.POLJDBCdriver				
"Example Connection Pool"	default	oracle.jdbc.pool.OracleDataSource				
"FCUBS10.0ConnectionPool"	default	oracle.jdbc.pool.OracleDataSource				


Setup | Logs | Help | Logout

Copyright © 1996, 2007, Oracle. All rights reserved.
 Oracle, JD Edwards, PeopleSoft, and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.
[About Oracle Enterprise Manager 10g Application Server Control](#)

Local intranet


7.2.9 Step 9

Click **Test** as shown below

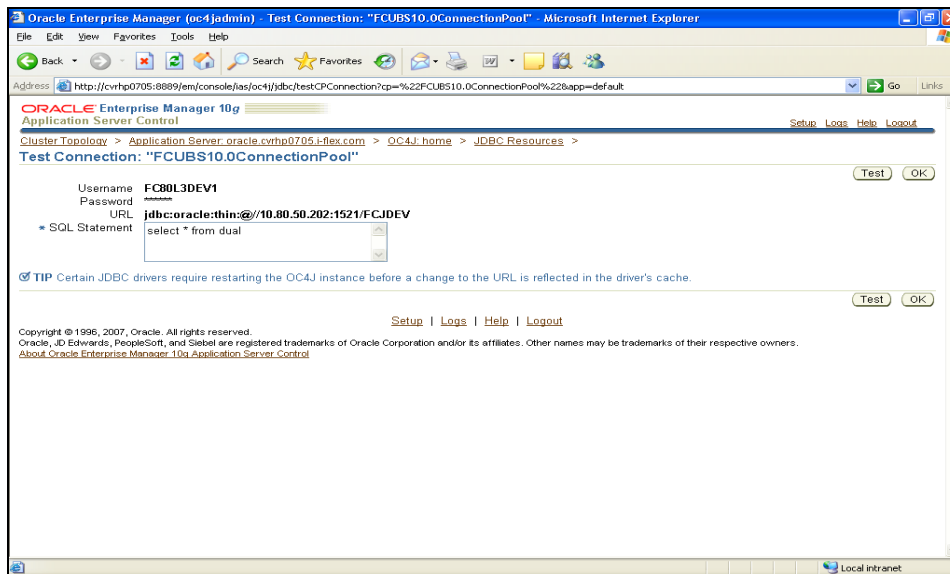

7.2.10 Step 10

Click **Create Data Sources** as shown below

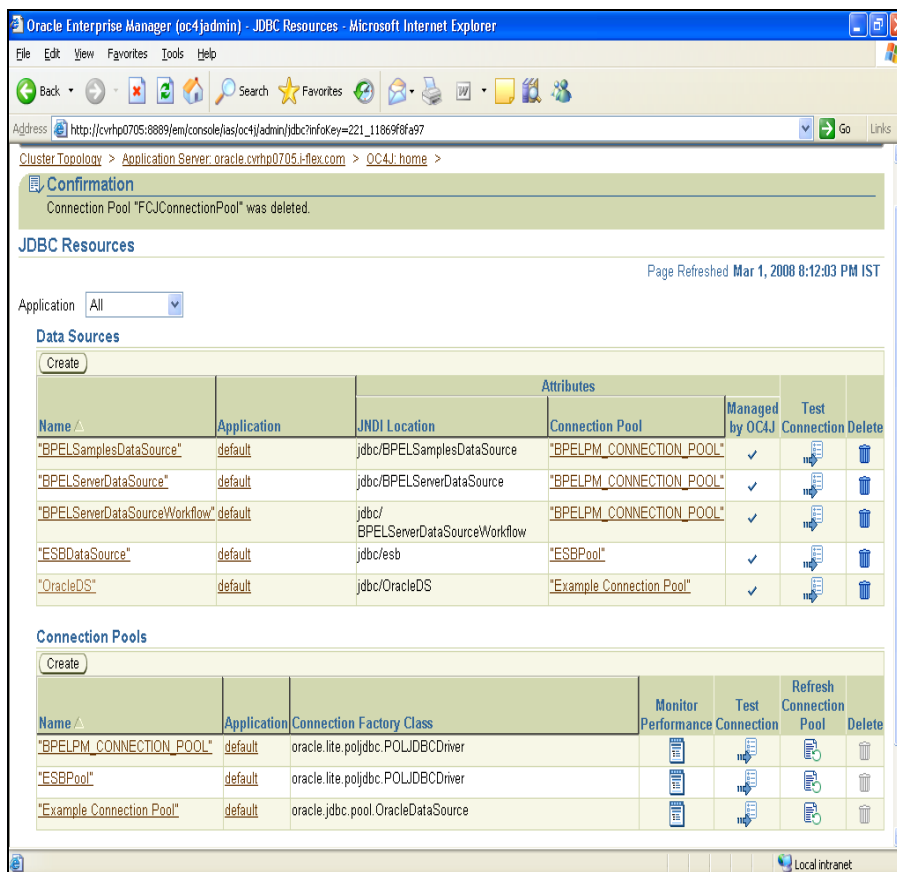

7.2.11 Step 11

Click **Continue** as shown below

The screenshot shows the Oracle Enterprise Manager 10g Application Server Control interface in a Microsoft Internet Explorer browser window. The title bar reads "Oracle Enterprise Manager (oc4jadmin) - Create Data Source - Application & Type - Microsoft Internet Explorer". The address bar shows the URL: <http://cvrhp0705:8889/em/console/ias/oc4j/jdbc/createDS?app=8dsType=managed>. The page header includes "ORACLE Enterprise Manager 10g" and "Application Server Control". The breadcrumb trail is: [Cluster Topology](#) > [Application Server oracle.cvrhp0705.i-flex.com](#) > [OC4J home](#) > [JDBC Resources](#) > [Create Data Source - Application & Type](#). The page contains two main sections: "Application" and "Data Source Type". In the "Application" section, there is a label "Select the application to which this new data source is to be added." and a dropdown menu labeled "Application" with "default" selected. In the "Data Source Type" section, there are three radio button options: "Managed Data Source" (selected), "Native Data Source", and "New Data Source from Existing Data Source". Below the "New Data Source from Existing Data Source" option, there is a label "Existing Data Source" and a dropdown menu showing "BPESamplesDataSource". At the bottom right of the form area, there are "Cancel" and "Continue" buttons. The footer contains copyright information: "Copyright © 1996, 2007, Oracle. All rights reserved. Oracle, JD Edwards, PeopleSoft, and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners. About Oracle Enterprise Manager 10g Application Server Control". The status bar at the bottom right shows "Local intranet".

7.2.12 Step 12

Refer the **screen shot** below. Provide **equivalent information** as shown below and click Finish.

Select the **Connection Pool** that was created from the combo box

Oracle Enterprise Manager 10g
Application Server Control

Cluster Topology > Application Server: oracle.cvrhp0705.i-flex.com > OC4J: home > JDBC Resources >

Create Data Source - Managed Data Source

Cancel Back Finish

Application default

* Name fcjdevDS

* JNDI Location jdbc/fcjdevDS

Transaction Level Global & Local Transactions

Connection Pool FCUBS10ConnectionPool

* Login Timeout (seconds) 0
Maximum time to wait while attempting to connect to a database.

Credentials

Cancel Back Finish

Setup | Logs | Help | Logout

Copyright © 1996, 2007, Oracle. All rights reserved.
Oracle, JD Edwards, PeopleSoft, and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.
[About Oracle Enterprise Manager 10g Application Server Control](#)

Done Local intranet

This creates Data Source as shown below.

Oracle Enterprise Manager (oc4jadmin) - JDBC Resources - Microsoft Internet Explorer

Address: http://cvrhp0705:8889/em/console/ias/oc4j/admin/jdbc?infokey=234_11869f8fa97

ORACLE Enterprise Manager 10g
Application Server Control

Cluster Topology > Application Server: oracle.cvrhp0705.i-flex.com > OC4J: home >

Confirmation
Data Source fcjdevDS has been created.

JDBC Resources
Page Refreshed Mar 1, 2008 8:27:15 PM IST

Application: All

Data Sources

Create

Name	Application	Attributes		Managed by OC4J	Test Connection	Delete
		JNDI Location	Connection Pool			
"BPELSamplesDataSource"	default	jdbc/BPELSamplesDataSource	"BPELPM_CONNECTION_POOL"	✓		
"BPELServerDataSource"	default	jdbc/BPELServerDataSource	"BPELPM_CONNECTION_POOL"	✓		
"BPELServerDataSourceWorkflow"	default	jdbc/BPELServerDataSourceWorkflow	"BPELPM_CONNECTION_POOL"	✓		
"ESBDataSource"	default	jdbc/esb	"ESBPool"	✓		
"fcjdevDS"	default	jdbc/fcjdevDS	"FCUBS10ConnectionPool"	✓		
"OracleDS"	default	jdbc/OracleDS	"Example Connection Pool"	✓		

Connection Pools


Create

Name	Application	Connection Factory Class	Monitor Performance	Test Connection	Refresh Connection Pool	Delete
"BPELPM_CONNECTION_POOL"	default	oracle.lite.pooljdbc.POLJDBCdriver				

Done Local intranet


7.2.13 Step 13

Click Test Connection as shown below

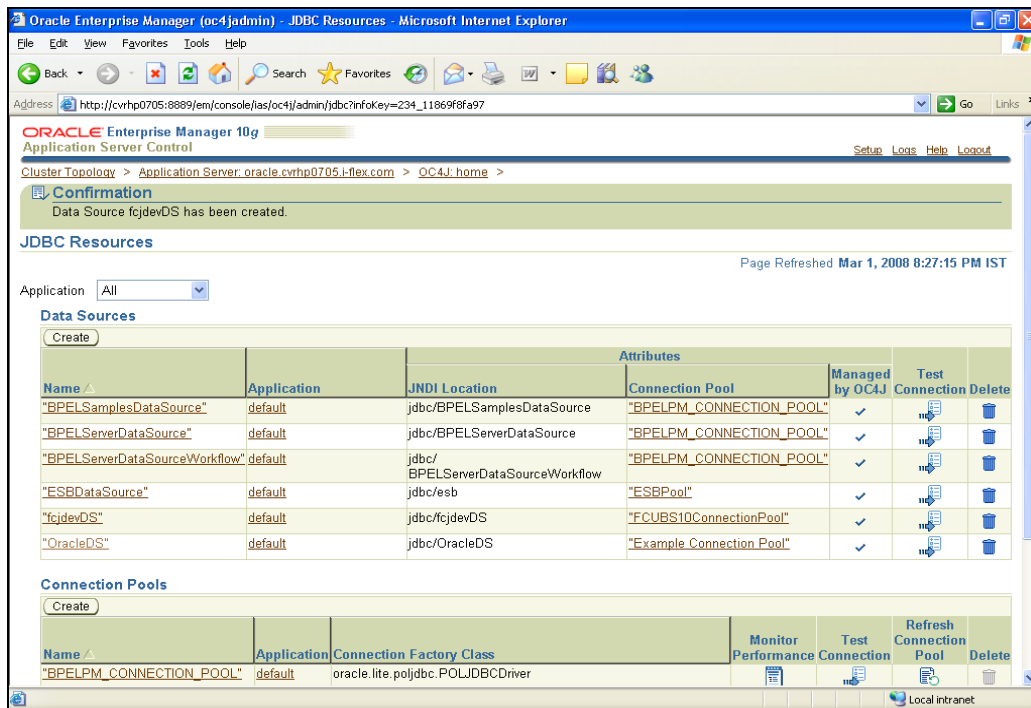

7.2.14 Step 14

Click Test as shown below

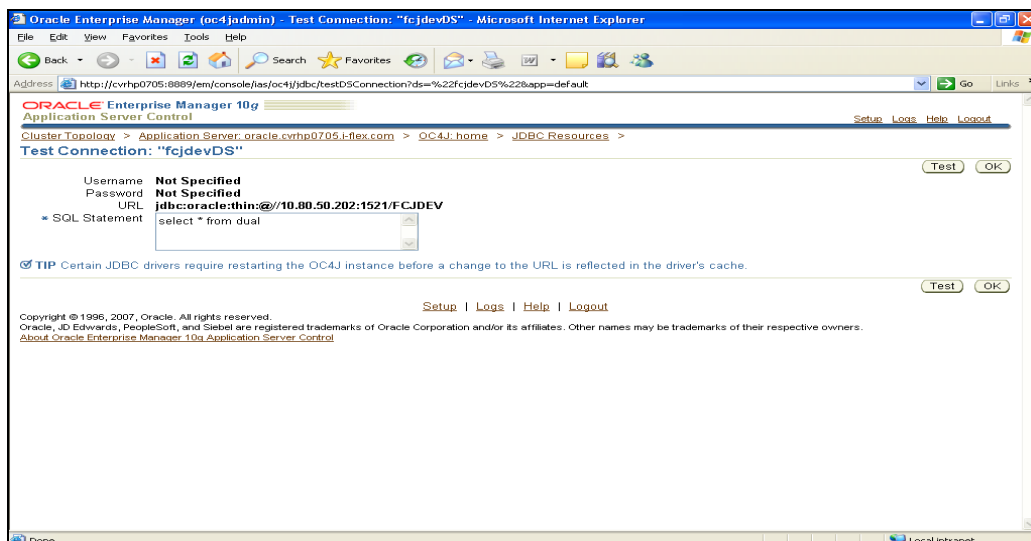

This completes Data source creation

7.2.15 Step 15

Click **Applications Tab** to navigate to the screen shown and then click **Deploy**

The screenshot shows the Oracle Enterprise Manager 10g Application Server Control console in a Microsoft Internet Explorer browser window. The address bar shows the URL: <http://localhost:8888/em/console/ias/oc4j/applications>. The page title is "ORACLE Enterprise Manager 10g Application Server Control". The breadcrumb navigation shows "OC4J: home". The "Applications" tab is selected in the top navigation bar. Below the navigation bar, a message states: "This page shows the J2EE applications and application components (EJB Modules, WAR Modules, Resource Adapter Modules) deployed to this OC4J instance." A "View" dropdown menu is set to "Applications". Below this, there are buttons for "Start", "Stop", "Restart", "Undeploy", "Redeploy", and "Deploy". There are also links for "Select All", "Select None", "Expand All", and "Collapse All". A table displays the deployed applications:

Select	Name	Status	Start Time	Active Requests	Request Processing Time (seconds)	Active EJB Methods	Application Defined MBeans
<input type="checkbox"/>	▼ All Applications						
<input type="checkbox"/>	ascontrol	↑	Apr 20, 2009 4:14:55 PM IST	1	0.06	0	
<input type="checkbox"/>	▼ default	↑	Apr 20, 2009 4:14:54 PM IST	0	0.00	0	
<input type="checkbox"/>	► Middleware Services						

Below the table, a "TIP" is displayed: "If you stop a parent application (such as the default application), then Enterprise Manager automatically stops any child applications that depend upon the parent application. Similarly, if you start a child application, Enterprise Manager automatically starts the required parent application." At the bottom of the page, there are links for "Setup", "Logs", "Help", and "Logout". The footer contains copyright information: "Copyright © 1996, 2007, Oracle. All rights reserved. Oracle, JD Edwards, PeopleSoft, and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners. About Oracle Enterprise Manager 10g Application Server Control". The browser status bar at the bottom shows "Done" and "Local intranet".

7.2.16 Step 16

Upload **FCJRADTool.war** file as shown below and click Next

The screenshot shows the Oracle Enterprise Manager 10g Application Server Control interface in a Microsoft Internet Explorer browser window. The title bar reads "Oracle Enterprise Manager (oc4jadmin) - Deploy: Select Archive - Microsoft Internet Explorer". The address bar shows the URL: `http://localhost:8888/em/console/ias/j2ee/deploy/deploySelectArchive?command=startWizard&appName=apps`. The page header includes "ORACLE Enterprise Manager 10g" and "Application Server Control" with links for "Setup", "Logs", "Help", and "Logout". A progress bar at the top indicates three steps: "Select Archive" (current), "Application Attributes", and "Deployment Settings".

The main content area is titled "Deploy: Select Archive" and includes "Cancel", "Step 1 of 3", and "Next" buttons. It is divided into two sections: "Archive" and "Deployment Plan".

Archive Section:

- Text: "The following types of archives can be deployed: J2EE application (EAR files), Web Modules (WAR files), EJB Modules (EJB JAR files) and Resource Adapter Modules (RAR files)."
 - Selected option: "Archive is present on local host. Upload the archive to the server where Application Server Control is running."
 - Field: "Archive Location" with value "D:\Development\FLEXCUBE\FCJRADTool.war" and a "Browse..." button.
 - Option: "Archive is already present on the server where Application Server Control is running."
 - Field: "Location on Server" (empty).
 - Text: "The location on server must be the absolute path or the relative path from j2ee/home".

Deployment Plan Section:

- Text: "The deployment plan is an XML file that contains the deployment settings for an application. If you do not have a deployment plan, one will be created automatically during the deployment process. Later in the deployment process, you can optionally edit the deployment plan and save it for a future deployment of this application."
 - Selected option: "Automatically create a new deployment plan."
 - Text: "The deployment plan settings will be based on OC4J defaults and information contained in the archive".
 - Option: "Deployment plan is present on local host. Upload the deployment plan to the server where Application Server Control is running."
 - Field: "Plan Location" (empty) and a "Browse..." button.
 - Option: "Deployment plan is already present on server where Application Server Control is running."
 - Field: "Location on Server" (empty).
 - Text: "The location on server must be the absolute path or the relative path from j2ee/home".

At the bottom of the form, there are "Cancel", "Step 1 of 3", and "Next" buttons, and a footer with "Setup | Logs | Help | Logout". The footer also contains copyright information: "Copyright © 1996, 2007, Oracle. All rights reserved. Oracle, JD Edwards, PeopleSoft and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners."

7.2.17 Step 17

Refer the screen shot below and click Next

The screenshot shows the Oracle Enterprise Manager 10g Application Server Control console in a Microsoft Internet Explorer browser window. The address bar shows the URL: <http://localhost:8888/em/console/ias/j2ee/deploy/deployAppAttributes>. The page title is "Oracle Enterprise Manager 10g Application Server Control".

The main content area is titled "Deploy: Application Attributes" and shows the progress of a deployment. The progress bar has three steps: "Select Archive", "Application Attributes" (current step), and "Deployment Settings".

The "Application Attributes" step includes the following information:

- Archive Type: **Web Module (WAR file)**
- Archive Location: **D:\Development\FLEXCUBE\FCJRADTool.war**
- Deployment Plan: **Creating a new plan**

Below this information, there are several input fields and dropdown menus:

- * Application Name:
- Parent Application:
- Bind Web Module to Site:
- Context Root:

Web Module	Context Root
ORACLE RAD Tool	<input type="text" value="FCJRADTool"/>

At the bottom of the page, there is a copyright notice: "Copyright © 1996, 2007, Oracle. All rights reserved. Oracle, JD Edwards, PeopleSoft, and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners." and a link to "About Oracle Enterprise Manager 10g Application Server Control".

7.2.18 Step 18

Click **Go To Task for Map Environment Reference** as shown below

Oracle Enterprise Manager 10g
Application Server Control

Deploy: Deployment Settings

Archive Type: **Web Module (WAR file)**
Archive Location: **D:\Development\FLEXCUBE\FCJRADTool.war**
Deployment Plan: **Creating a new plan**

Application Name: **FCJRADTool**
Parent Application: **default**
Bind Web Module to Site: **default-web-site**
Context Root: **FCJRADTool**

Deployment Tasks

The table below provides a set of common deployment tasks you might want to perform for this application. Only those tasks that apply to the current application are enabled.

Task Name	Go To Task	Description
Map Environment References		Map any environment references in your application (for example, data sources) to physical entities currently present on the operational environment.
Select Security Provider		A security provider acts as the source for available users and groups when mapping security roles.
Map Security Roles		Map any security roles exposed by your application to existing users and groups. The list of users and groups is obtained from the security provider you selected for this application.
Configure EJBs		Configure the Enterprise JavaBeans in your application.
Configure Clustering		Configure clustering of your application.
Configure Class Loading		Manipulate the classpath of your application.

Advanced Deployment Plan Editing

Click Edit Deployment Plan to set more advanced deployment options.

Save Deployment Plan

After you make changes, you can save the deployment plan to your local disk. You

7.2.19 Step 19

Refer the screen shot below and enter corresponding details and then click OK.

Oracle Enterprise Manager 10g
Application Server Control

Address: <http://localhost:8888/em/console/has/j2ee/deploy/oc4j/tasks/mapEnvRefs>

Navigation: Select Archive | Application Attributes | **Deployment Settings**

Deployment Settings: Map Environment References

Archive Type: **Web Module (WAR file)**
Archive Location: **D:\Development\FLEXCUBE\FCJRADTool.war**
Deployment Plan: **Creating a new plan**

Application Name: **FCJRADTool**
Parent Application: **default**
Bind Web Module to Site: **default-web-site**
Context Root: **FCJRADTool**

Map Resource References

The table below lists the resource references which need to be associated with physical entities on the system where the selected instance/cluster is running.

Resource Reference	Description	Type	Referenced By		Map to JNDI Location
			Module	Enterprise Bean	
jdbc/fccdev		javax.sql.DataSource	ORACLE RAD Tool	n/a	<input type="text" value="jdbc/fccdev"/>
jdbc/fcdev		javax.sql.DataSource	ORACLE RAD Tool	n/a	<input type="text" value="jdbc/fcdev"/>
jdbc/fcdevDS		javax.sql.DataSource	ORACLE RAD Tool	n/a	<input type="text" value="jdbc/fcdevDS"/>

Map URL Resource References


The table below lists the resource references of type java.net.URL each of which must be linked to a URL.

Resource Reference	Description	Referenced By		
		Module	Enterprise Bean	Map to URL
No resource references were				

Done Local intranet

7.2.20 Step 20

Click Deploy

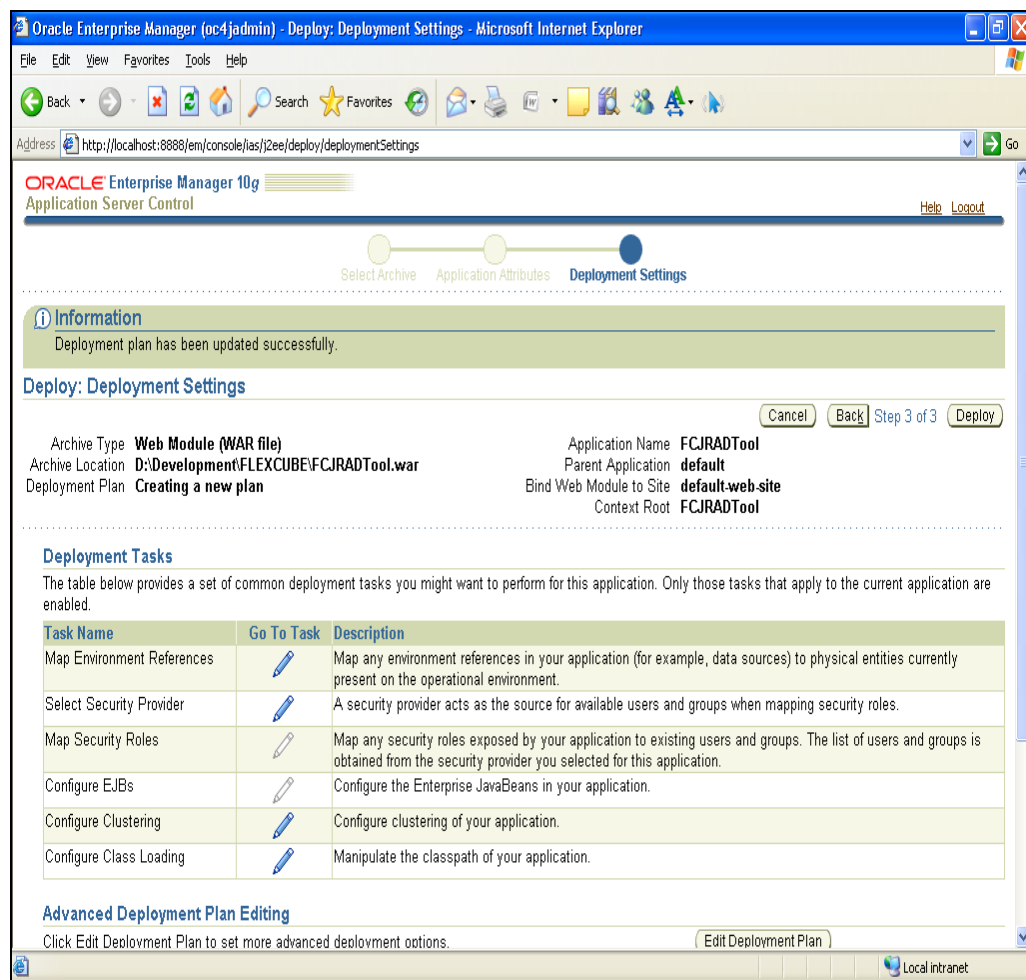


This completes Deployment of FCJRADTool.war file to OC4J 10.1.3.x Application server.

7.3 WebLogic Application server

To deploy **FCJRADTool.war** to WebLogic Application Server follow the below mentioned steps


Steps 1-18 explain creation of Connection Pool and Data source. Skip these steps if Connection pool and data source already exists in the WebLogic Application server.

Login to the Weblogic Server with <Username> and <Password>

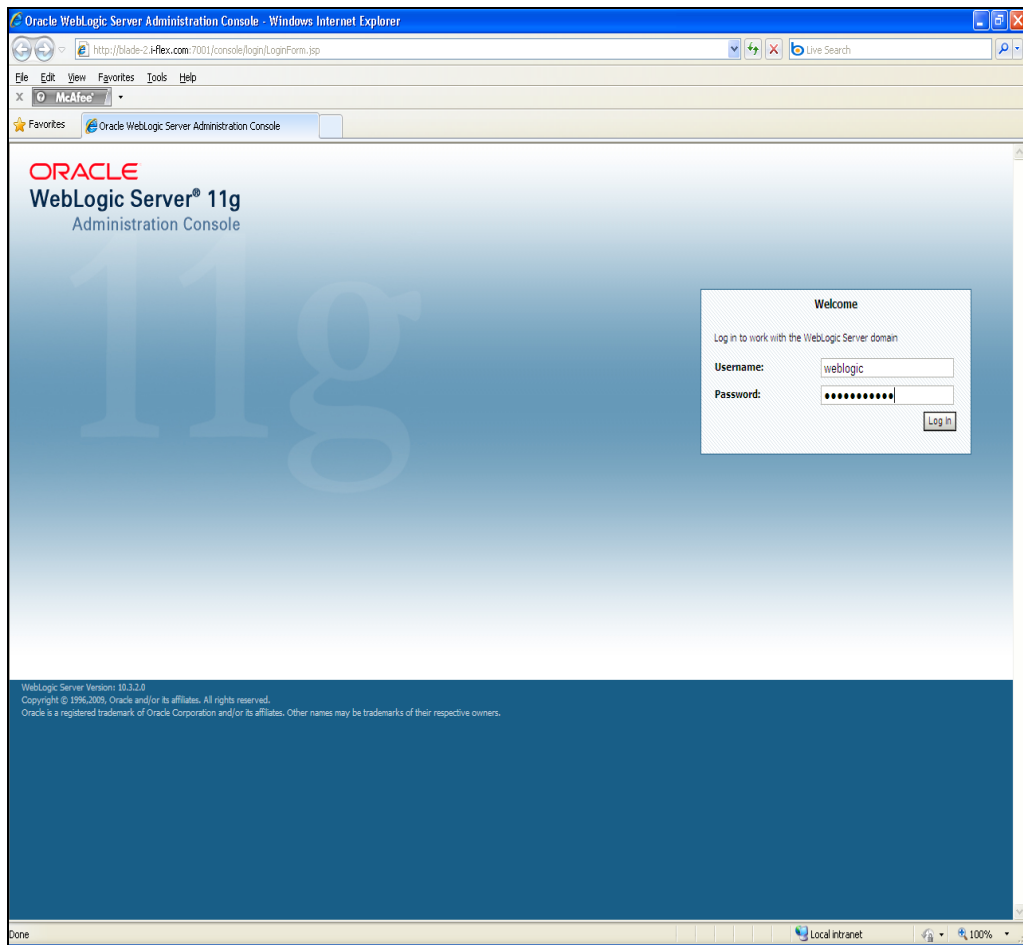

7.3.1 Step 1

Under Domain Configurations→Services→JDBC, Click on Data Sources

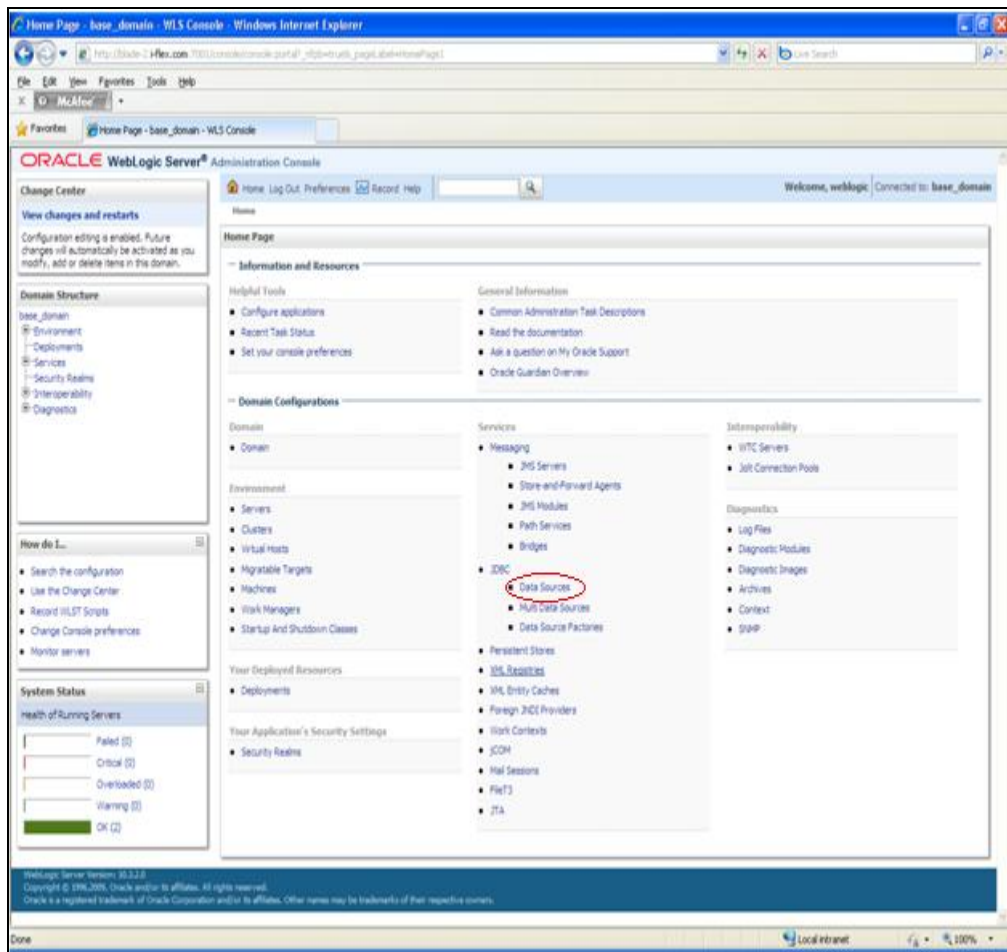

7.3.2 Step 2

JDBC Data Sources shows a list of available Data Sources. To create a new DS, Click on New

The screenshot shows the Oracle WebLogic Server Administration Console. The main content area is titled 'Summary of JDBC Data Sources'. It includes a description of JDBC data sources and a table listing existing ones. The 'New' button is circled in red.

Summary of JDBC Data Sources

A JDBC data source is an object bound to the JNDI tree that provides database connectivity through a pool of JDBC connections. Applications can look up a data source on the JNDI tree and then borrow a database connection from a data source.

This page summarizes the JDBC data source objects that have been created in this domain.

Customize this table

Data Sources (Filtered - More Columns Exist)

<input type="checkbox"/>	Name	JNDI Name	Targets
<input type="checkbox"/>	fcjSchedulerDS	jdbc/fcjSchedulerDS	ManagedServer_1
<input type="checkbox"/>	FCJBS11.1	jdbc/fcjbs11.1	ManagedServer_1
<input type="checkbox"/>	HDPC	jdbc/fcjbs11.1	ELCManaged
<input type="checkbox"/>	RAD10.5	jdbc/PCCEV	ManagedServer_1

Showing 1 to 4 of 4 Previous | Next

7.3.3 Step 3

- Give a suitable name for the Data Source. The JNDI Name(Case Sensitive) should match the name as given in Open Development web.xml. Click Next.
- JNDI Name Should be like jdbc/<Schema-Name>




Schema Name is same added while adding environment details.

The screenshot shows the Oracle WebLogic Server Administration Console. The main window is titled 'Create a New JDBC Data Source - base_domain - WLS Console - Windows Internet Explorer'. The left sidebar contains navigation links like 'Change Center', 'Domain Structure', 'How do I...', 'System Status', and 'Health of Running Servers'. The main content area is titled 'Create a New JDBC Data Source' and contains the 'JDBC Data Source Properties' form. The form has several fields: 'Name' (RAD11), 'JNDI Name' (jdbc/RAD11DEV), 'Database Type' (Oracle), and 'Database Driver' (Oracle's Driver (Thin XA) for Instance connections: Versions 9.0.1.9.2.0.10.11). The 'Next' button is highlighted with a red circle. The bottom status bar shows 'Done' and 'Local Intranet'.

7.3.4 Step 4

Click Next

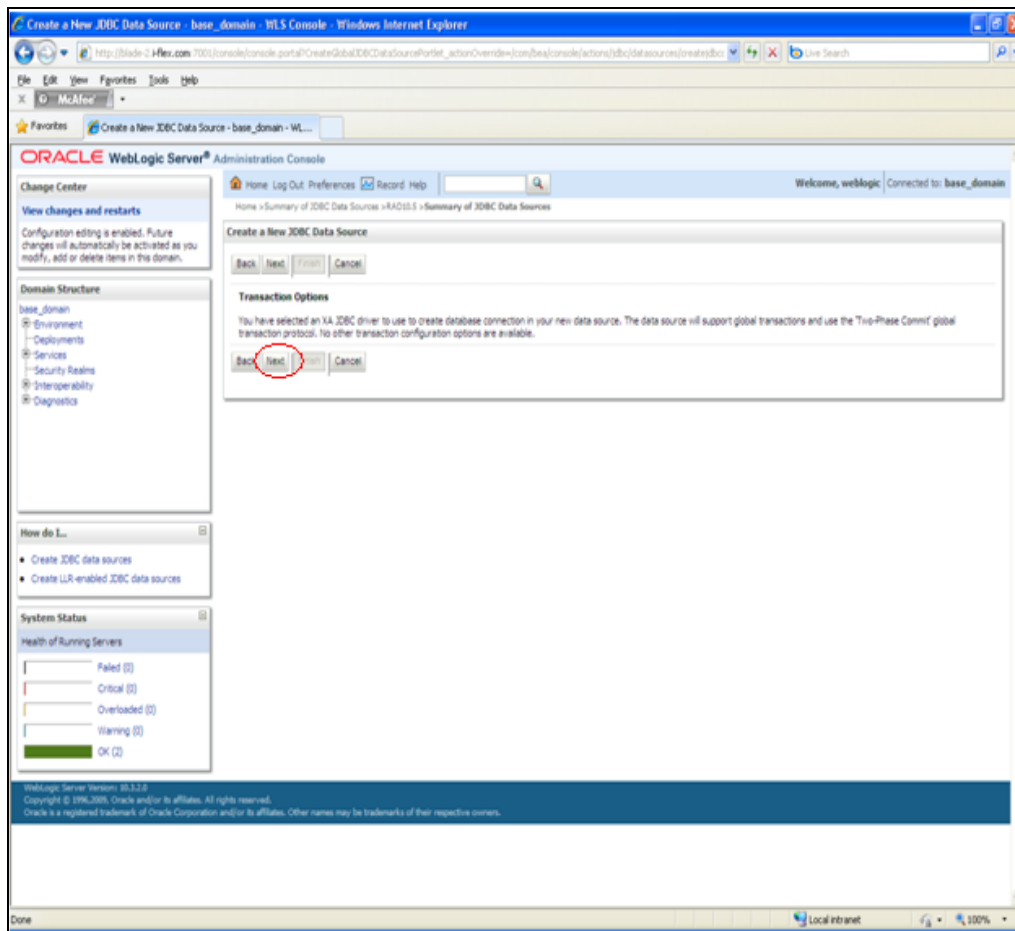

7.3.5 Step 5

Fill in the Marked Fields in Connection Properties. Click Next

7.3.6 Step 6

Click on Test Configuration to test if connection is being made to the data source. Click next.


The screenshot shows the 'Create a New JDBC Data Source' wizard in the WLS Console. The wizard is titled 'Create a New JDBC Data Source - base_domain - WLS Console - Windows Internet Explorer'. The URL in the address bar is 'http://localhost:7001/console/console.portal?_afCreateJDBCDataSourceForPortlet_actionOrchestrator=CreateJDBCDataSourceWizard&_afCreateJDBCDataSourceWizard_action=JDBCDataSourceWizardNextStep'. The wizard has a left sidebar with 'Diagnostics', 'How do I...', and 'System Status'. The 'System Status' section shows 'Health of Running Servers' with a green bar and 'OK (2)'. The main content area contains the following fields and labels:

- Driver Class Name:** oracle.jdbc.xa.client.OracleThinDriver
- URL:** jdbc:oracle:thin:@10.104.1.1:1521:orcl
- Database User Name:** FC111DEV
- Password:** [masked]
- Confirm Password:** [masked]
- Properties:** [text area containing 'user=FC111DEV']
- Test Table Name:** SQL SELECT 1 FROM DUAL

At the bottom of the wizard, there are four buttons: 'Test Configuration', 'Back', 'Next', and 'Cancel'. The 'Test Configuration' button is circled in red. The bottom status bar shows 'Done' and 'Local Intranet'.


7.3.7 Step 7

Choose a Target where you wish to deploy the new Data source and Click Finish.

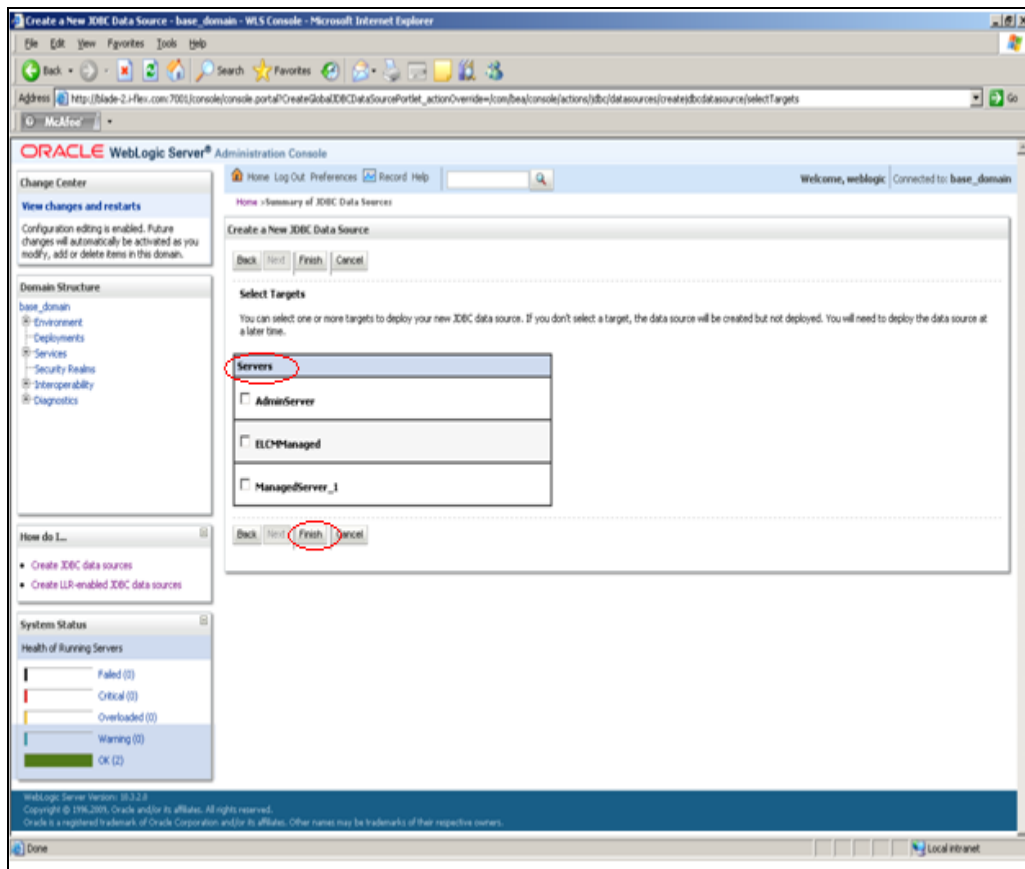

7.3.8 Step 8

This completes the creation of Datasources. Now to deploy the War file click on Deployments under Domain Structure.

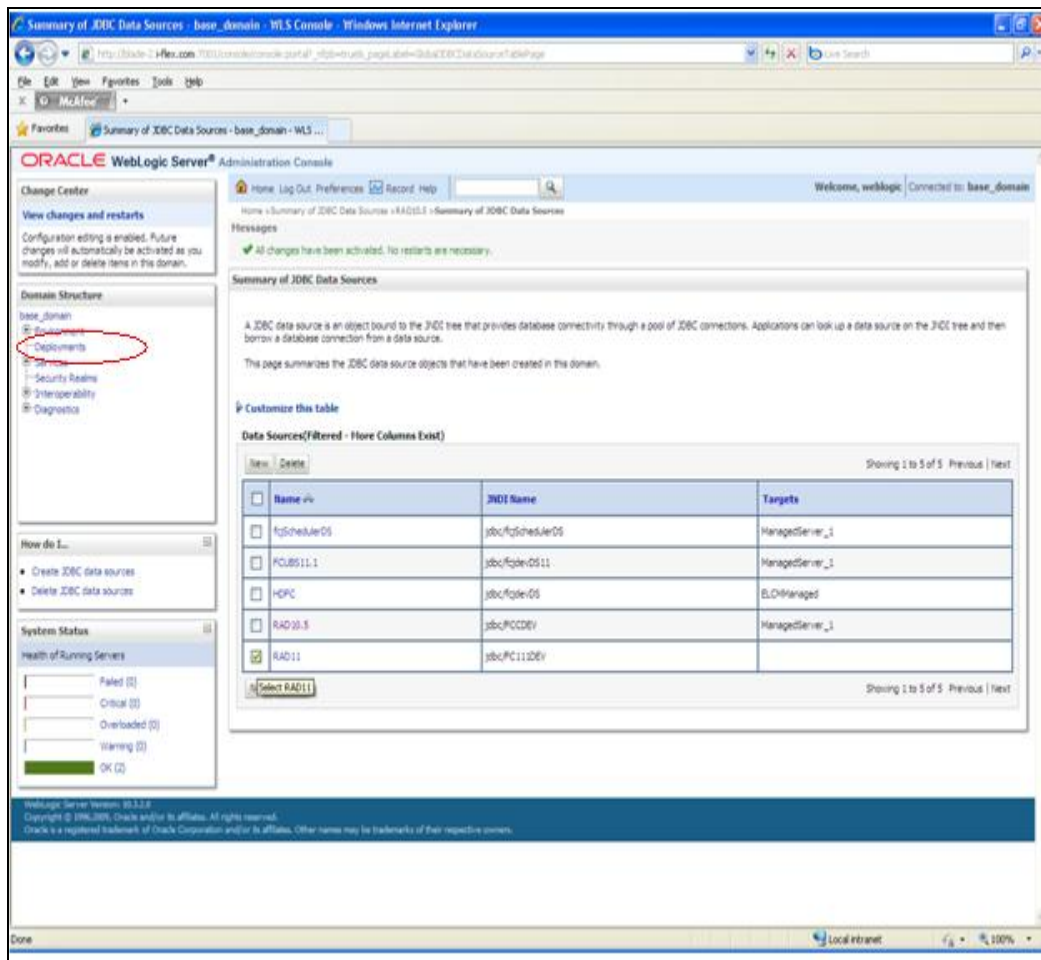

The screenshot displays the Oracle WebLogic Server Administration Console. The left-hand 'Domain Structure' tree has 'Deployments' selected and circled in red. The main window shows the 'Summary of JDBC Data Sources' page, which includes a table of existing data sources.

Name	JNDI Name	Targets
fcScheduleDS	jdbc/fcScheduleDS	ManagedServer_1
FCBSS11.1	jdbc/fcbs11.1	ManagedServer_1
HPFC	jdbc/fcbs11.1	ManagedServer_1
RAD10.5	jdbc/RAD10.5	ManagedServer_1
RAD11	jdbc/RAD11DEV	ManagedServer_1

7.3.9 Step 9


To install a new application or module for deployment click the Install button.

The screenshot shows the Oracle WebLogic Server Administration Console in a web browser. The page title is "Summary of Deployments - base_domain - WLS Console". The left sidebar contains a "Domain Structure" tree with "base_domain" selected, and a "How do I..." section with links like "Install an Enterprise application". The main content area is titled "Summary of Deployments" and has tabs for "Control" and "Monitoring". Below the tabs, there is a table of deployments. The "Install" button is circled in red. The table lists four deployments: "WLSCHC1A01", "WLSCHC1A02_5", "WLSCHC1A03", and "WLSCHC1A04".

Name	State	Health	Type	Deployment Order
WLSCHC1A01	New		Enterprise Application	100
WLSCHC1A02_5	Active	OK	Web Application	100
WLSCHC1A03	Active	OK	Enterprise Application	100
WLSCHC1A04	Active	OK	Web Application	100


7.3.10 Step 10

The Open Development war file first needs to be uploaded to weblogic local machine. Click on upload your file(s) hyperlink.

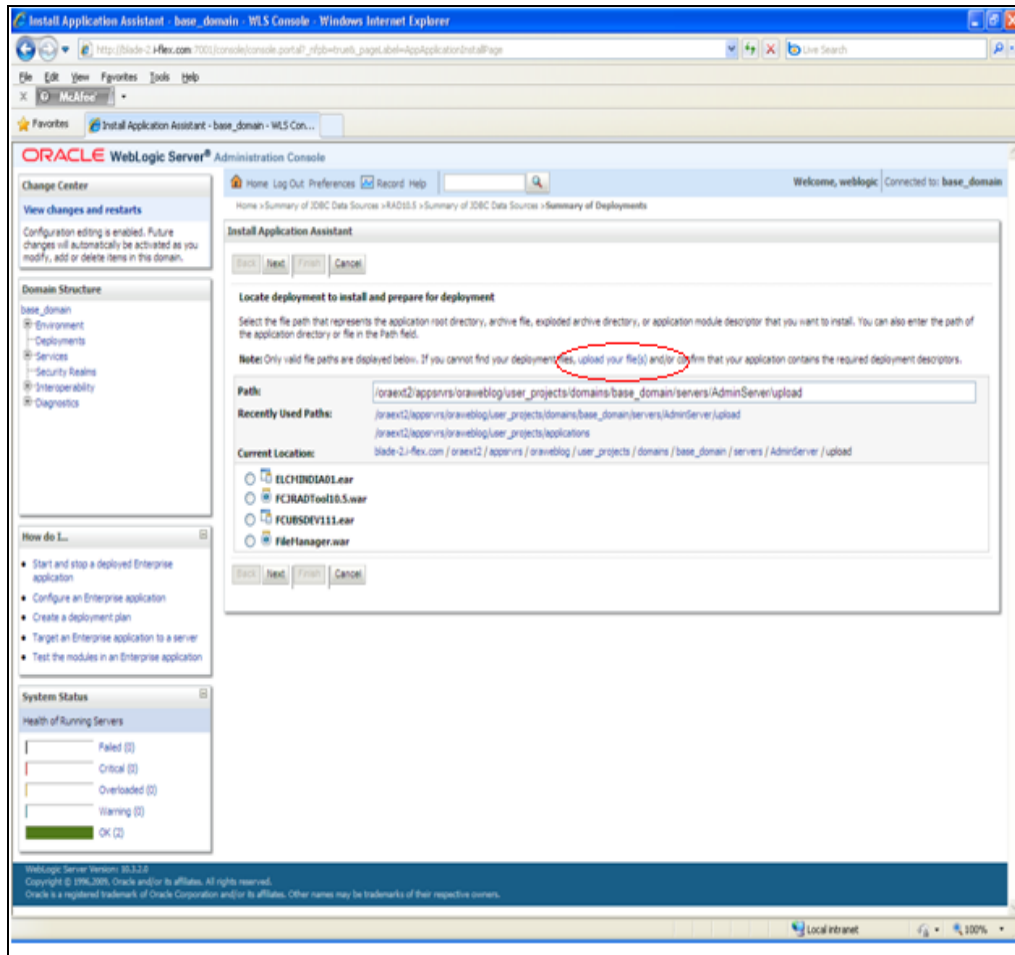


7.3.11 Step 11

Choose the deployment archive by click on Browse Button. Skip the optional step of uploading a deployment plan. Click Next.

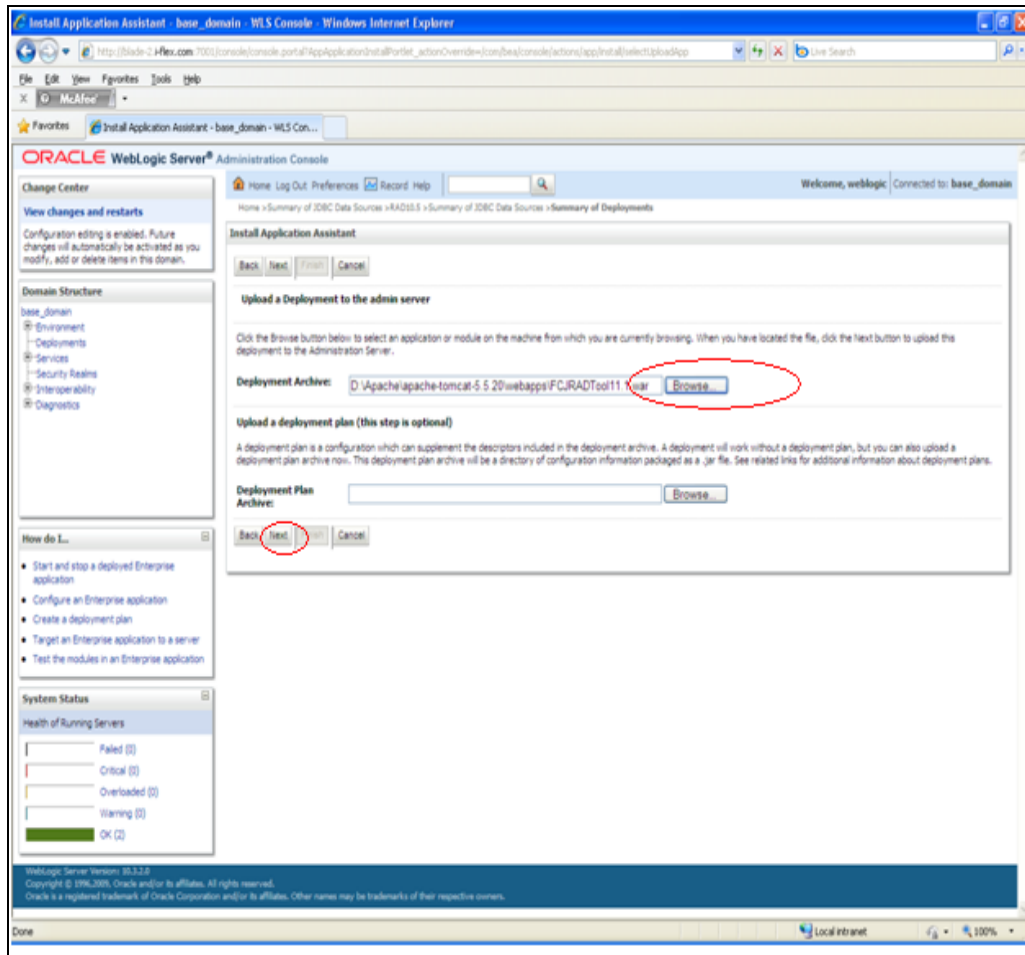


7.3.12 Step 12

Click Next

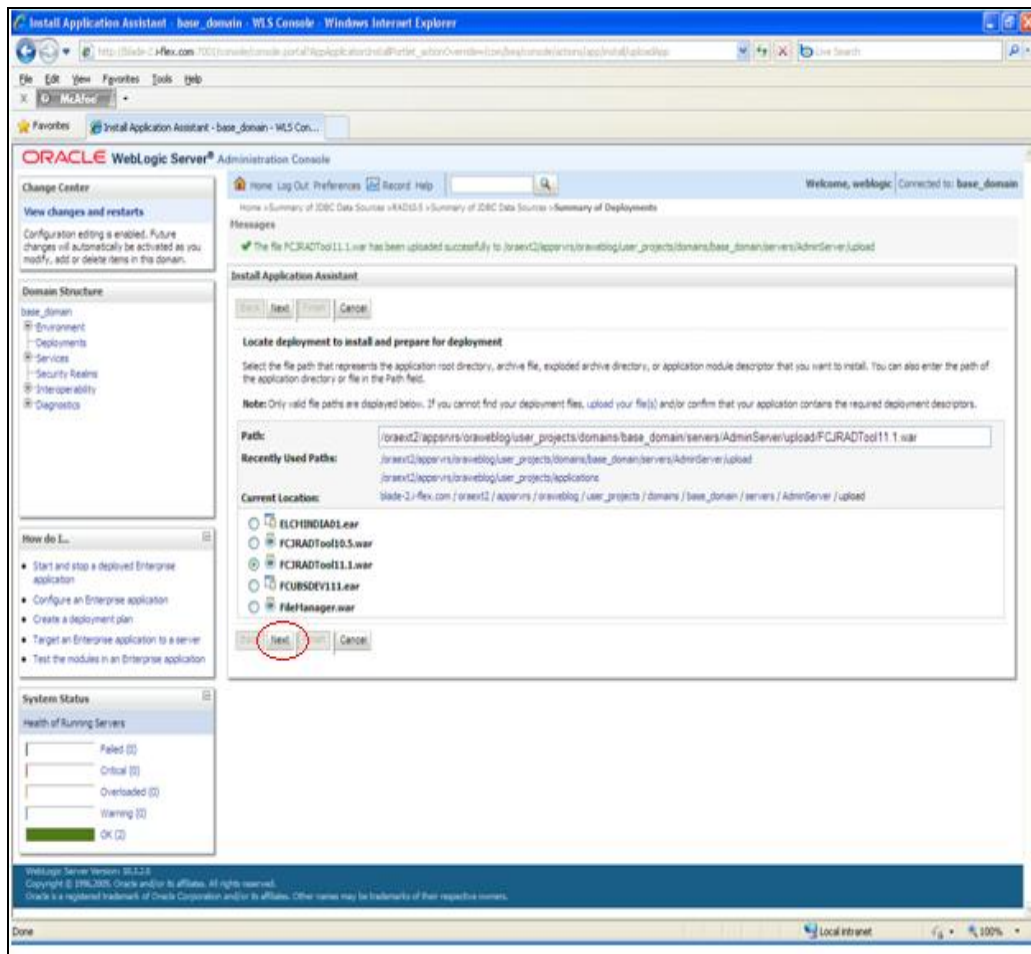


7.3.13 Step 13

Choose the option Install the deployment as an application and Click on Next.

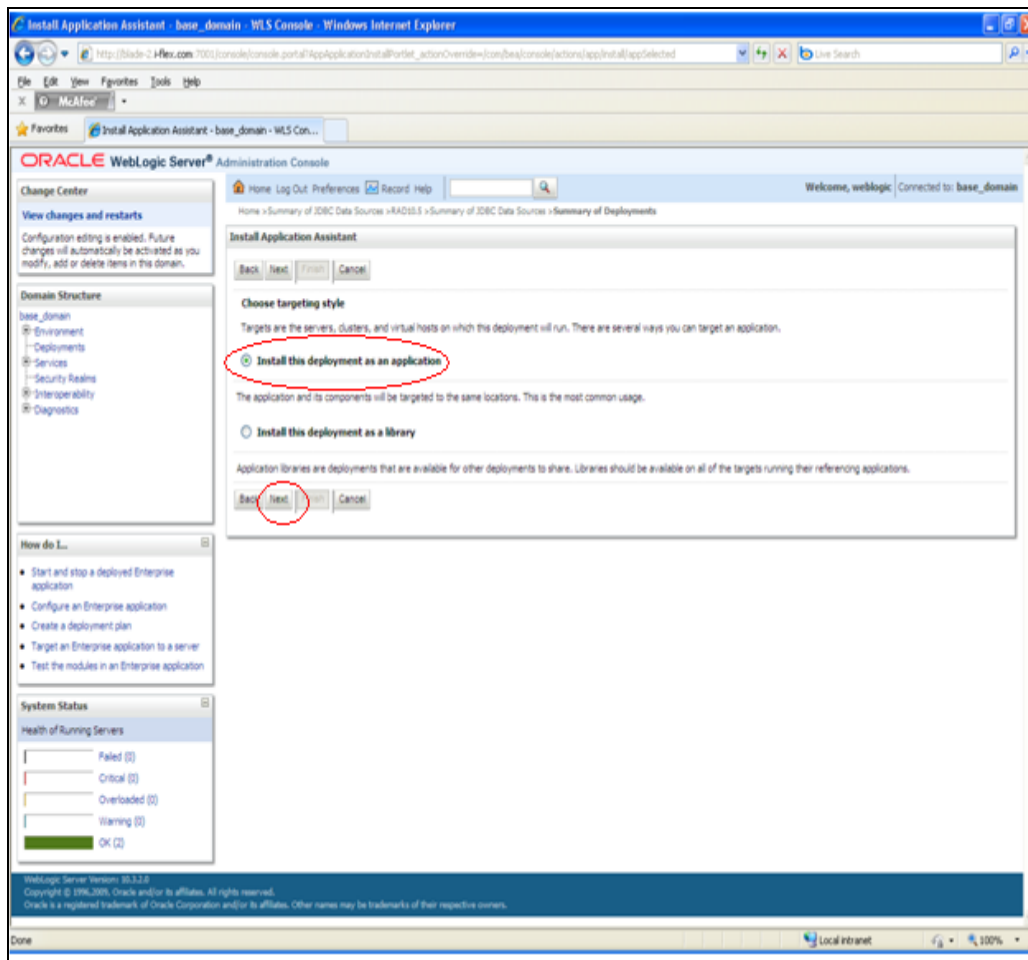


7.3.14 Step 14

Choose the target server where the deployment will be located and Click on Next.

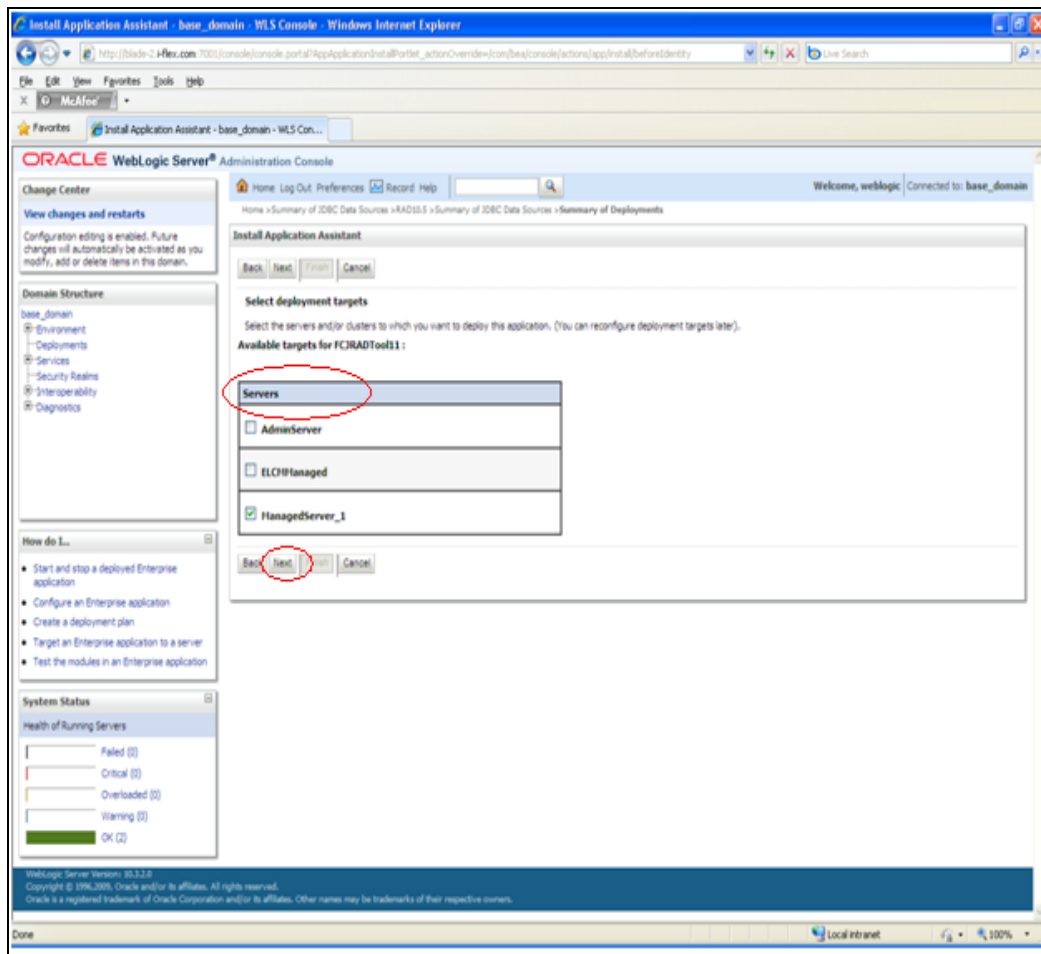

7.3.15 Step 15

Click Next.

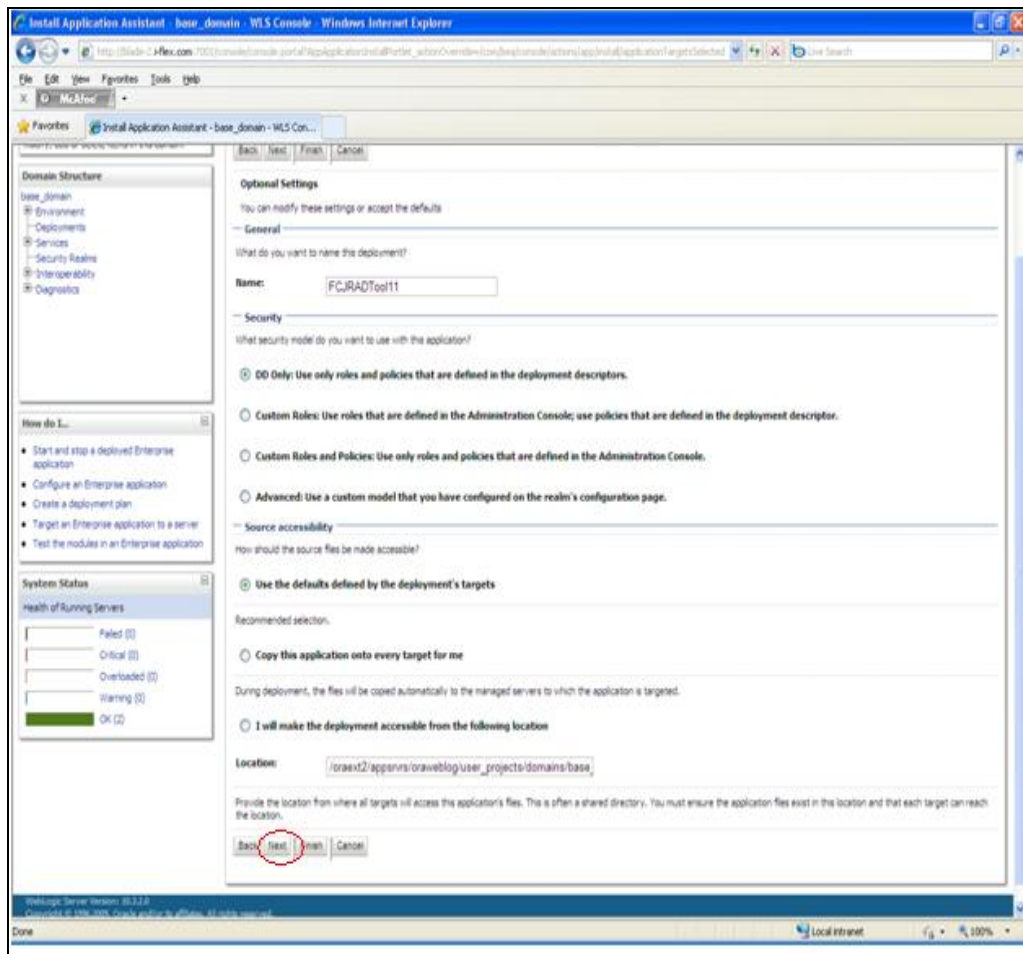

7.3.16 Step 16

This completes the deployment of War File. The Open Development Deployment will now be seen under the list of Deployments. Click on the Hyperlink marked in Red.

The screenshot shows the Oracle WebLogic Server Administration Console. The main content area displays the 'Summary of Deployments' page. On the left, there is a 'Domain Structure' tree with 'Deployments' selected. Below it, a 'How to...' section lists various tasks. The 'System Status' section shows the health of running servers. The main table lists the following deployments:

Name	State	Health	Type	Deployment Order
WLSCHN121	New		Enterprise Application	100
PCSRADTool11	Active	OK	Web Application	100
PCSRADTool11	Active	OK	Web Application	100
PCSRADTool11	Active	OK	Enterprise Application	100
PCSRADTool11	Active	OK	Web Application	100

The 'PCSRADTool11' deployment is highlighted with a red circle. The 'Health' column shows 'OK' for all active deployments. The 'Deployment Order' is 100 for all listed items.

7.3.17 Step 17

Go to the Testing Tab.

The screenshot shows the Oracle WebLogic Server Administration Console in a web browser. The 'Testing' tab is selected and highlighted with a red circle. The console displays the configuration for the application 'PCRAOTool11'. The left sidebar contains navigation links for 'Change Center', 'Domain Structure', 'How do I...', and 'System Status'. The main content area shows the 'Testing' tab with a 'Save' button and a table of modules and components. The table lists the application 'PCRAOTool11' as a 'Web Application'.

Settings for PCRAOTool11

Overview | Deployment Plan | Configuration | Security | Targets | Control | **Testing** | Monitoring | Notes

Use this page to view the installed configuration of a Web Application.

Name:	PCRAOTool11	The name of this application deployment. More Info...
Context Root:	/PCRAOTool11.1	The specific path at which this web application is found by a server. More Info...
Path:	/oraxst2/appmgrs/oraweblog/user_projects/domains/base_domain/servers/AdminServer/upload/PCRAOTool11.1.var	The path to the source of the deployable unit on the Administration Server. More Info...
Deployment Plan:	(no plan specified)	The path to the deployment plan document on Administration Server. More Info...
Staging Mode:	(not specified)	The mode that specifies whether an application's files are copied from a source on the Administration Server to the Managed Server's staging area during application preparation. More Info...
Security Model:	DDOnly	The security model specifies how this deployment should be secured. More Info...
Deployment Order:	100	An integer value that indicates when this unit is deployed, relative to other deployable units on a server, during startup. More Info...
Deployment Principal Name:		A string value that indicates what principal should be used when deploying the file or archive during startup and shutdown. This principal will be used to set the current subject when calling out into application code for interfaces such as ApplicationLifecycleListener. If no principal name is specified, then the anonymous principal will be used. More Info...

Modules and Components

Name	Type
PCRAOTool11	Web Application

7.3.18 Step 18

The Deployment of Open Development on Weblogic Server has been finished and you may launch the application by the link mentioned below.


The screenshot shows the Oracle WebLogic Server Administration Console. The main content area displays the 'Settings for PCRADTool11' page, specifically the 'Testing' tab. A table titled 'Deployment Tests' lists the test points for the application. The 'Test Point' for the 'default' test is highlighted with a red circle.


Name #s	Test Point	Comments
PCRADTool11		
default	http://33.384.74.104:9003/PCRADTool11	Default url on server ManagedServer_1
index.html	http://33.384.74.104:9003/PCRADTool11/index.html	Welcome file index.html on server ManagedServer_1

The left sidebar contains the 'Change Center' and 'Domain Structure' sections. The 'System Status' section at the bottom shows the health of running servers, with a green bar indicating 'OK (2)'.


8. IE Settings

- Open Internet Explorer click on Tools → Internet Options → Security (Tab) → Internet → Custom Level

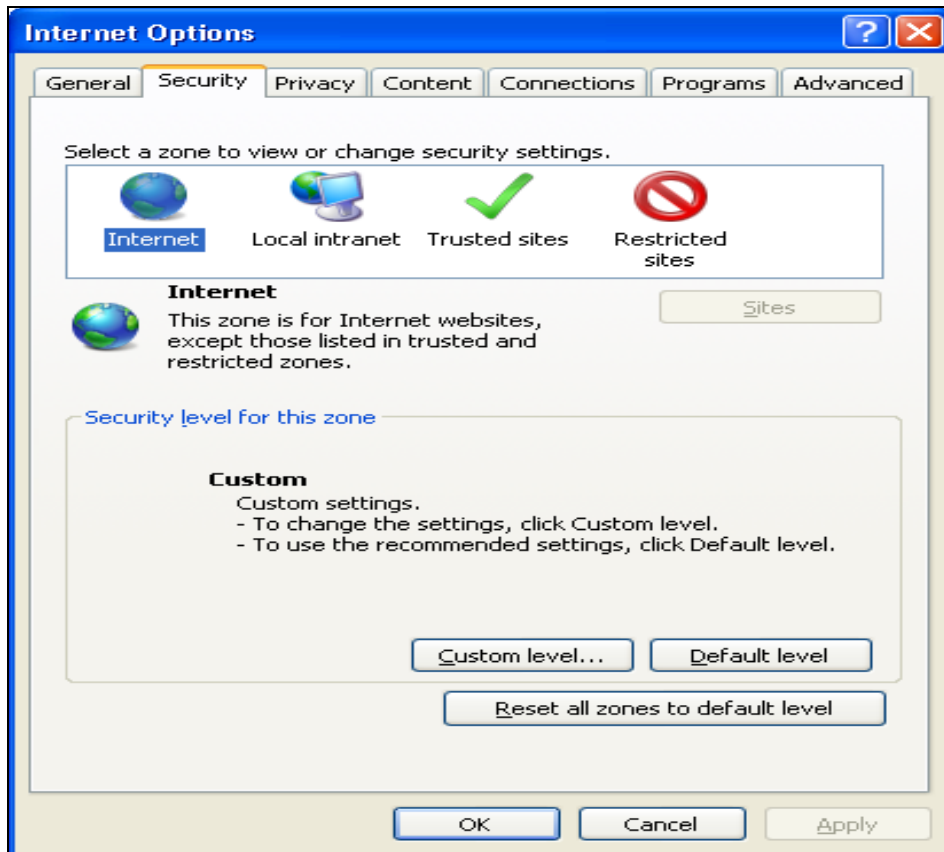

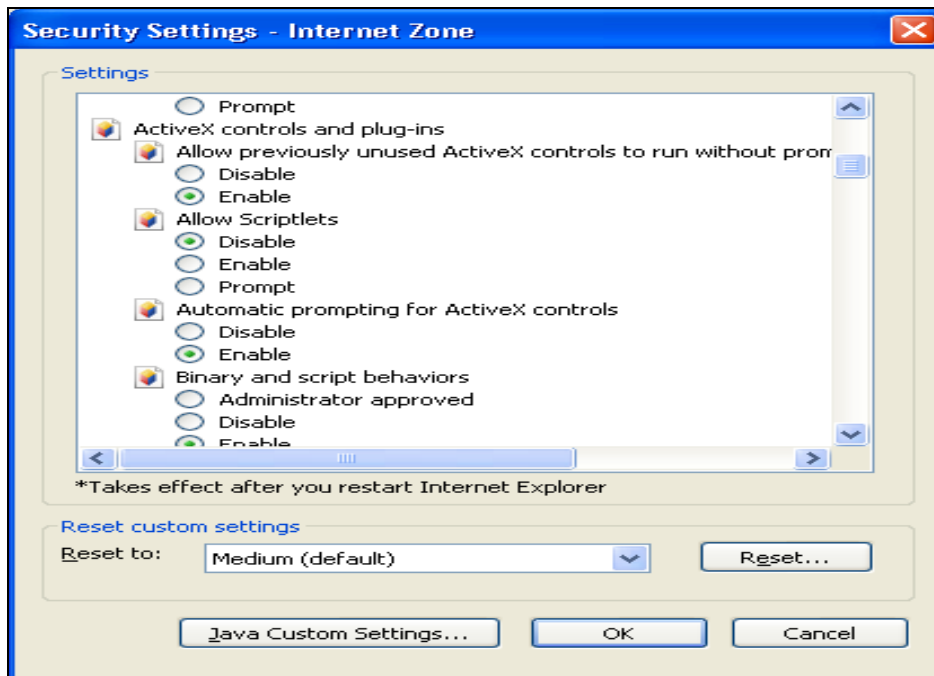

- Enable all the Options, select custom for Java Permissions
- Click on Java Custom Settings

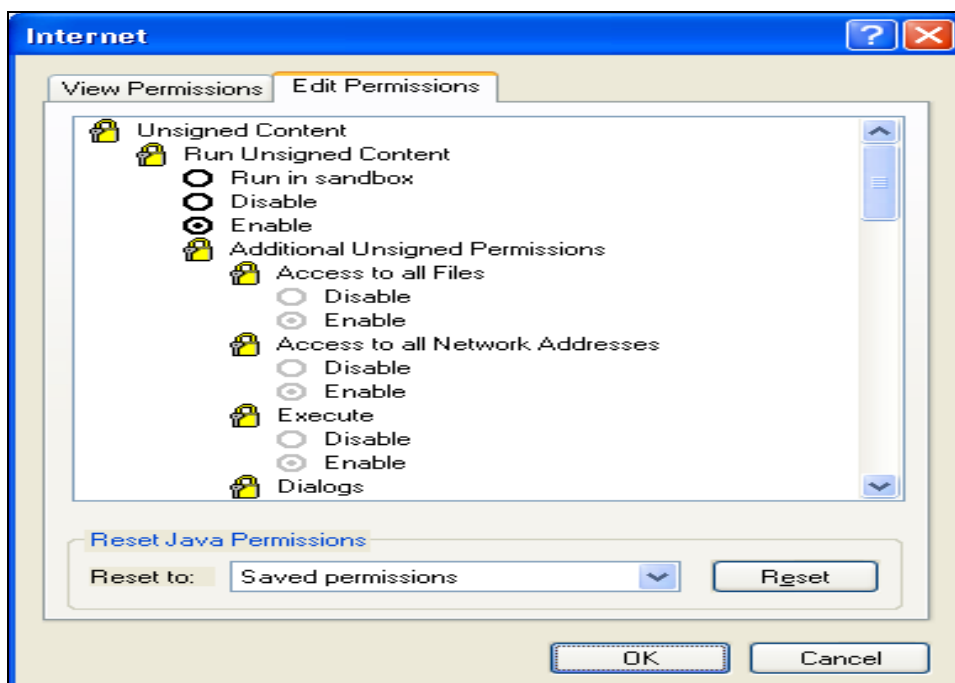

- Select Edit Permissions Tab.
- Select Enable Option for Run Unsigned Content and Run Signed Content.
- Same Settings For Local Intranet



Click on Custom Level select Enable for all Options, for Java Permissions it should be custom.

9. Administration

9.1 User Roles

Open Development Tool has the below User Roles for controlling the access rights:

- System Administrator
- Release Administrator
- Developer

Users will be allowed to perform various tasks based on the “Role” assigned to the user. Users can have different Roles for different Releases. However, System Administrator Role is not at a Release Level and is only for Open Development Tool Administration.

9.1.1 System Administrator

This Role is only meant for the Open Development Team and Users with this Role will have full control over the system. Users with this Role only would be able to create New Releases in Open Development Tool.

Login Open Development tool with RADTOOL as user Name and RADTOOL as Password

9.1.2 Release Administrator


This Role is meant for Project Leaders and Team leaders and allows them to Release administration. Users with this role would be allowed to perform the below tasks

- Creation of Environment(s) for the Release
- Creation of users
- Provide access to the Release for required Users

9.1.3 Developer

This Role is for Developers and Users with role would be able to access the Function development related features of the Open Development tool.

User will also be able to Switch Between releases and Environments Using the “Set Release” Option.

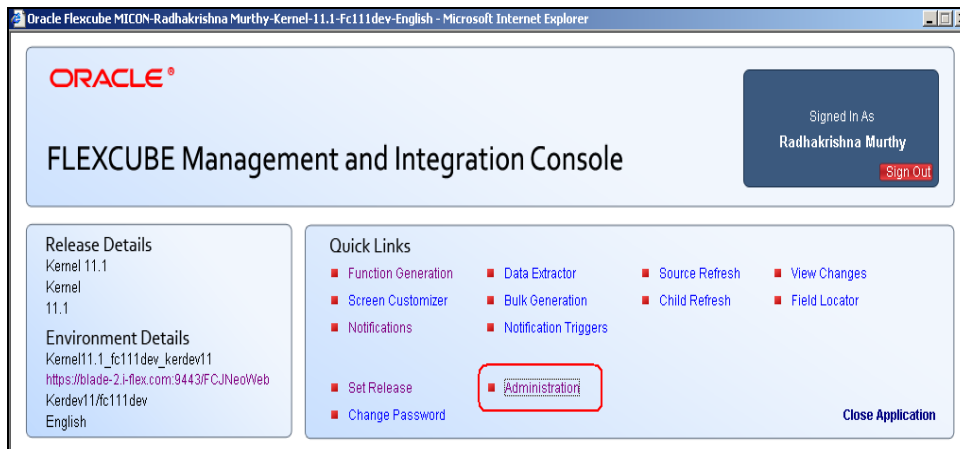

9.2 Release Definition

Every Release needs to be maintained in Open Development Tool. Below details need to be maintained in Open Development Tool before starting any New Release

- Release Code : A unique Code which would identify the release E.g. FCUBSKERNEL11.1
- Release Description : Brief Description of the Release
- Release Type : Kernel/Cluster/Custom



Create the Release with Custom type for extensibility environment

- Release Number: Release Number e.g. .11.1
- A release can have multiple environments for various activities like Development, Unit Testing, and Support etc.
- Release Creation can only be done by Open Development Team and a request with the above details needs to be sent to the Open Development Team in the beginning of every Release. Open Development team would create a release and grants “Release Administrator” Role to the Requester. Release administrator then can provide access to this Particular release for the developers.
- Release administrator will be able to create Environment(s) for this Release. Release administrator can also create New Users if required and can provide them the access to this Release.

The screenshot shows a web browser window titled "Oracle Flexcube MICON- Admin Details- Admin-Default --English -- Webpage Dialog". The Oracle logo is in the top left. A left-hand navigation pane contains a tree view with "User", "Environment", "Release", "Detail", and "Summary". The "Release" section is selected, and the "Release Details" form is displayed on the right.

Release Details

- * Release Code: FC_UBS_VUM_11.2.CU.0.0.0.0
- Release Description: FC_UBS_VUM_11.2.CU.0.0.0.0 Test Customer Re
- Release Type: Custom (dropdown menu)
- Release No: 1
- Remarks: Customer Test release base on 11.2
- Release SPC: B Anandan

The Windows taskbar at the bottom shows the start button, several application icons, a search bar, and the system clock displaying 4:06 PM.

Create the User and assign Release Admin role for a release that created

The screenshot shows the Oracle Flexcube MICON Admin Details page. The left sidebar contains a tree view with 'User' selected, showing sub-items: Detail, Summary, Environment, and Release. The main area is titled 'User Maintenance' and contains the following fields:

- Upload From Excel**: A button labeled 'Upload'.
- User ID**: * ANANDAN
- User Name**: B Anandan
- Default Release**: _V.UM_11.2.CU.0.0.0.0
- Default Environment**: (empty)
- User Password**: (masked with dots)
- User Status**: Enabled

Below these fields is a table with two columns: 'Release Code' and 'User Role'.

Release Code	User Role
FC_UBS_V.UM_11.2.CU.0.0.0.0	Release Admin

The bottom of the screenshot shows the Windows taskbar with the start button, search bar, and system clock (4:07 PM).

9.3 Environment Creation

Open Development Tool requires at least one environment for each release and the below environment details need to be maintained in Open Development Tool for each environment

- Data Base Details
 - Instance Name
 - Port Number
 - Schema Name
 - Password
- Application Server Details
 - Target FLEXCUBE IS Application URL
 - Target FLEXCUBE IS JS Path
 - Target FLEXCUBE IS UIXML Path
- Server Password and user id in case the App server is on Unix

The screenshot shows the 'Oracle Flexcube MICON- Admin Details- Admin-Default--English -- Webpage Dialog' window. The 'Environment Master Details' tab is active, displaying a 'Save' button in the top right. The left sidebar contains a tree view with 'User', 'Environment', and 'Release' categories, each with 'Detail' and 'Summary' sub-items. The main area contains the following fields:

* Environment Code: <input type="text" value="I_11.2.CU.0.0.0_DEV"/>		Environment Name: <input type="text" value="I_11.2.CU.0.0.0_DEV"/>	
Release Code: <input type="text" value="V.U.M_11.2.CU.0.0.0.0"/>		Language Code: <input type="text" value="ENG"/>	
Database Instance: <input type="text" value="ORCLNEW"/>	Database HostName: <input type="text" value="localhost"/>	Database Port: <input type="text" value="1521"/>	Database IP Address: <input type="text" value="localhost"/>
Database Name: <input type="text" value="FCUBS112N"/>	Database Password: <input type="password" value="....."/>	JNDI Name: <input type="text" value="jdbcfjdevDS"/>	
Application Name: <input type="text" value="FCUBS11.2"/>	Application URL: <input type="text" value="com:7001/FCJNeoWeb"/>	Application IP Address: <input type="text" value="localhost"/>	Application Operating System: <input type="text" value="Windows"/>
Application Transfer Type: <input type="text" value="File Copy"/>	JS Directory Path: <input type="text" value="12\yv1aaolwanScriptUS"/>	UIXML Directory Path: <input type="text" value="3112\yv1aaolwanUIXML"/>	
Server Username: <input type="text"/>	Server Password: <input type="password"/>	Server Filemanager URL: <input type="text"/>	Filemanager Username: <input type="text"/>
Filemanager Password: <input type="password"/>			

9.3.1 User Definition

New users can be created by System Administrators and Release administrators.

- User Id
- Password
- Default Release
- Default Environment
- User Releases
 - Releases for which the user needs access should be given here
 - One user can have access to multiple Release with one of those Release as the default release
 - User Role for each of these Releases.

Oracle Flexcube MICON- Admin Details- Radhakrishna Murthy- Kernel-11.1-Fc111dev-English -- Web Page Dialog

ORACLE

User Maintenance

Upload From Excel

* User ID: RADHAKRISHNAM User Name: Radhakrishna Murthy

Default Release: FCUBSKERNEL11.1 Default Environment: KERNEL11.1_FC111D

User Password: User Status: Enabled


*Release Code	User Role
FCUBSKERNEL11.0_FCCDEV	Developer
FCUBSKERNEL11.0_TESTING	Developer
FCUBSKERNEL11.1	Release Admin

10. Developer Check List

As Open Development tool identifies the Release parameters and accordingly generates the output, it is important to ensure the correct release before using the Tool.

Open Development Tool also reads several tables from FLEXCUBE schema, Developers should ensure the correctness of the environment they are currently connected to.

The Landing page of Open Development Tool has both Release details and environment details as shown below

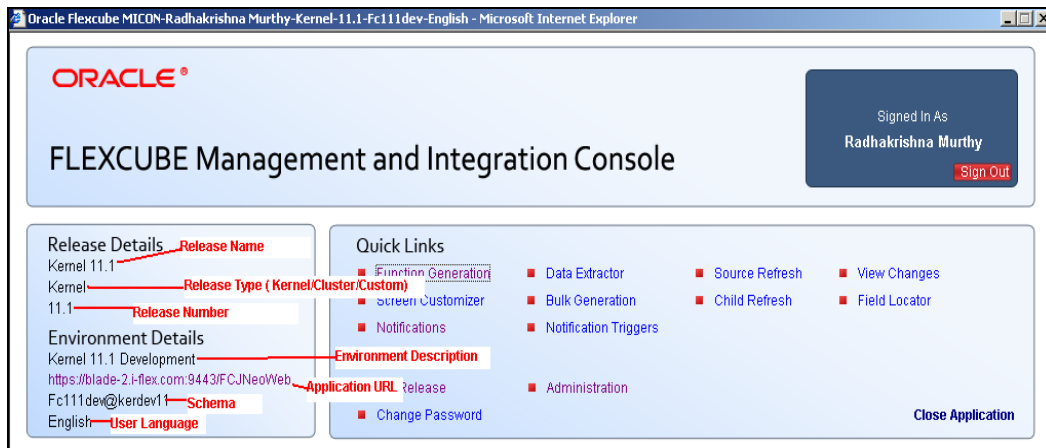



Installation and Setup Guide
[May] [2017]
Version 12.4.0.0.0

Oracle Financial Services Software Limited
Oracle Park
Off Western Express Highway
Goregaon (East)
Mumbai, Maharashtra 400 063
India

Worldwide Inquiries:
Phone: +91 22 6718 3000
Fax: +91 22 6718 3001
www.oracle.com/financialservices/

Copyright © [2007], [2017], Oracle and/or its affiliates. All rights reserved.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.