

---

# PeopleSoft Application Management Plug-in 13.2.1.1.0 for Oracle Enterprise Manager 13c Implementation Guide

---

February 2017



PeopleSoft Application Management Plug-in 13.2.1.1.0 for Oracle Enterprise Manager 13c  
Implementation Guide

Copyright © 1988, 2017, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

#### Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

# Contents

<b>Chapter 1: Getting Started with PeopleSoft Application Management Plug-in.....</b>	<b>9</b>
Understanding PeopleSoft Application Management Plug-in.....	9
Common Terms Used in This Book.....	9
Features of the PeopleSoft Application Management Plug-in.....	12
Managing User Accounts.....	12
PeopleSoft Application Management Plug-in Installation.....	13
PeopleSoft Target Discovery.....	13
Understanding PeopleSoft Target Types.....	13
PeopleSoft Target Types.....	14
<b>Chapter 2: Understanding PeopleSoft Application Management Plug-in Pages.....</b>	<b>15</b>
Understanding PeopleSoft Application Management Plug-in Pages.....	15
Understanding the Enterprise Manager Homepage.....	15
Understanding the All PeopleSoft Targets Homepage.....	16
Viewing PeopleSoft Targets on the All PeopleSoft Targets Page.....	18
Creating PeopleSoft Targets.....	19
Adding Targets.....	19
Organizing PeopleSoft Targets.....	25
Common Elements on Targets Homepages.....	26
Monitoring.....	27
Control.....	27
Job Activity.....	27
Information Publisher Reports.....	28
Performance.....	28
Configuration Management.....	28
Domain Management.....	30
Log Management Page.....	30
Configuration.....	32
Compliance.....	32
Target Setup.....	33
<b>Chapter 3: Discovering PeopleSoft Targets.....</b>	<b>35</b>
Understanding the Discovery Process.....	35
Understanding Steps in the Discovery Process.....	35
Understanding UNIX Login Shell Support.....	36
Auto Discovery of Directly Discoverable Targets.....	36
Emcli verb based discovery of targets.....	43
Discovering directly discoverable targets.....	43
Discovering Database Target.....	43
Discovering the Process Monitor Target.....	44
Adding and Registering Targets.....	45
Setting Environment Variables.....	47
Adding and Registering PS Process Monitor Targets.....	49
Understanding PS Process Monitor Discovery.....	49
Configuring PROCESSREQUEST Web Service.....	49
Adding PS Process Monitor Targets From Discovery Results Page.....	51
Working With Custom SSL Configurations.....	51
<b>Chapter 4: Managing PeopleSoft Application Database Targets.....</b>	<b>55</b>
Understanding PeopleSoft Application Database Targets.....	55

Accessing the PeopleSoft Application Database Page.....	55
<b>Chapter 5: Managing PeopleSoft Application Server Domain Targets.....</b>	<b>57</b>
Understanding PeopleSoft Application Server Domain Targets Homepage.....	57
Creating and Configuring PeopleSoft Application Server Domain Targets.....	58
Creating PeopleSoft Application Server Domain Targets.....	59
Configuring PeopleSoft Application Server Domain Targets.....	61
<b>Chapter 6: Managing PeopleSoft Process Scheduler Domain Targets.....</b>	<b>63</b>
Understanding the PeopleSoft Process Scheduler Domain page.....	63
Creating PS Process Scheduler Domain Targets.....	64
<b>Chapter 7: Managing PeopleSoft Search Server Domain Targets.....</b>	<b>65</b>
Understanding PeopleSoft Search Server Domain Targets.....	65
Accessing PeopleSoft Search Server Domain Targets.....	66
Creating a PS Search Server Domain.....	67
<b>Chapter 8: Managing PS PIA and PS Web Site Targets.....</b>	<b>69</b>
Understanding PeopleSoft PIA Targets.....	69
Creating PeopleSoft PIA Domains Target.....	70
Starting and Stopping Targets Using Jobs.....	73
Managing PIA.....	75
Redeploy PIA Page.....	75
Recreate WebLogic Server Domain and Redeploy PIA Page.....	77
Install Additional PeopleSoft Site Page.....	78
Replicate PIA.....	79
Setup Process Monitor.....	80
Accessing the PeopleSoft Web Site Targets.....	80
<b>Chapter 9: Managing PeopleSoft Process Monitor Targets.....</b>	<b>83</b>
Accessing the PeopleSoft Process Monitor page.....	83
Viewing PeopleSoft Process Monitor Performance.....	84
Administering PeopleSoft Process Monitor.....	85
Scheduling Process Monitor.....	85
Monitoring Process Monitor.....	86
Running the Process Monitor Metrics Report.....	88
<b>Chapter 10: Managing PeopleSoft Systems and Services.....</b>	<b>89</b>
Understanding PeopleSoft Systems.....	89
Understanding Services.....	89
Creating PeopleSoft Systems.....	89
Accessing the PeopleSoft System page.....	90
Automated PeopleSoft System Creation.....	90
Removing PeopleSoft Systems.....	92
Managing PeopleSoft Systems.....	92
PeopleSoft System Members.....	92
PeopleSoft System URLs.....	93
PeopleSoft System Topology.....	96
<b>Chapter 11: Security for PeopleSoft Application Management Plug-in.....</b>	<b>97</b>
Understanding Enterprise Manager Security.....	97
Working With Target Privileges.....	97
Managing Target Preferred Credentials.....	98
Working With Target Credentials.....	99
Working With Enterprise Manager User Accounts.....	100
Updating Target Credentials for PeopleSoft Targets.....	100
<b>Chapter 12: Validating Rules.....</b>	<b>103</b>
Understanding Compliance for PeopleSoft Application Management Plug-in.....	103

Compliance Feature Overview.....	103
Associating Compliance Standard to a PeopleSoft Target.....	104
<b>Chapter 13: Configuration and Metric Data Collected.....</b>	<b>107</b>
Configuration Data Collected.....	107
Metric Data Collected.....	107
<b>Chapter 14: Working with Privileges.....</b>	<b>117</b>
Target Actions and Privileges.....	117
Target Actions and Privileges Tables.....	117
<b>Chapter 15: Target Log Files.....</b>	<b>127</b>
Default Target Log Files.....	127
PS PIA Log Files.....	127
PS Application Server Domain Log Files.....	128
PS Search Server Domain Log Files.....	128
PS Process Scheduler Server Log Files.....	129
<b>Chapter 16: Target Rules.....</b>	<b>131</b>
PS Application Server Domain Rules.....	131
PS PIA Rule.....	132
PS Web Site Rules.....	132
<b>Chapter 17: Target Relationships.....</b>	<b>135</b>
Links That Display on Homepages.....	135
Relationships on Topology Page.....	136
<b>Chapter 18: Troubleshooting.....</b>	<b>139</b>
PeopleSoft AMP Agent Logs.....	139
RSA Certificate Issues on WebSphere.....	140
Issue.....	140
Solution.....	140
Using the PSEMENV.SH Script for Setting Environment Variables.....	141
Issue.....	141
Solution.....	141
Mandatory Environment Variables for Discovery.....	142
Process Monitor Target Setup Fails When Using SUDO Credentials.....	142
Issue.....	142
Solution.....	142
PeopleSoft AMP Diagnostics Utility.....	142
Creating WebLogic PIA Domain Issues on the AIX platform.....	144
Issue.....	144
Solution.....	144
Replicate PIA Issue.....	144
Solution.....	144
PIA Target Status Issues on Solaris and Unix Platforms.....	144
Issue.....	145
Solutions.....	145





# Getting Started with PeopleSoft Application Management Plug-in

---

## Understanding PeopleSoft Application Management Plug-in

The PeopleSoft Application Management Plug-in uses Oracle Enterprise Manager to provide an integrated, graphical user interface for monitoring and managing components of a PeopleSoft environment.

The entities that Enterprise Manager monitors and manages are called *managed targets*, which are separately manageable and named entities within the enterprise, such as databases, application servers, Process Scheduler servers, web servers, and so on.

The Oracle Enterprise Manager product includes the Management Agent, Oracle Management Service, Management Repository Database, and the Cloud Control Console, which is a browser-based central console through which administrators can perform monitoring, administration, and configuration tasks for the enterprise.

## Common Terms Used in This Book

### **Administrator Account**

Administrator accounts provide users permission to perform administrative tasks and access administrative information. You can set up each administrator account to have its own privileges and notification rules. There are two types of administrator accounts:

- Super Administrator
- Administrator

### **Incidents**

Indicates a potential problem; either a warning or critical threshold for a monitored metric has been crossed. An alert can also be generated for various target availability states. Enterprise Manager provides various options to respond to Incidents.

Administrators can be notified automatically when an alert triggers and can set up corrective actions to resolve an alert condition automatically.

### **Beacon**

A special target installed on an agent that runs a defined service test and reports the results to the Oracle Management Service to determine the status and performance of a service.

<b>Dashboard</b>	Presents information using intuitive icons and graphics that let you spot recent changes and quickly identify and respond to problems.
<b>Discovery Process</b>	The process of identifying and registering targets in Enterprise Manager so that they can be monitored and managed from the Enterprise Manager console. Targets are discovered one host at a time.
<b>Enterprise Manager Cloud Control Console</b>	The Oracle Enterprise Manager web-based user interface for centrally managing the entire PeopleSoft environment. It can be accessed from a client workstation running a browser that meets the minimum client requirements of the Enterprise Manager.
<b>Management Agent</b>	A process deployed as binaries on each of the monitored hosts. It is responsible for monitoring all targets in the host, communicating the information to the middle-tier management service, and managing and maintaining the host and its targets.
<b>Management Repository</b>	<p>This is an Oracle database that contains all the available information about administrators, targets, and applications managed within Enterprise Manager. Captured data is uploaded to the repository through the Oracle Management Service.</p> <p>The Repository organizes the data and makes it available for retrieval—allowing the data to be shared between any administrators accessing the Cloud Control Console.</p>
<b>Oracle ADF</b>	This is a Java EE framework for building enterprise applications through a visual and declarative development experience.
<b>Oracle Management Service</b>	A web application (J2EE-compliant) that renders the user interface for the Oracle Enterprise Manager Cloud Control Console. It works with all management agents to process monitoring and job information, and uses the Management Repository as its data store. The Oracle Management Service (OMS) runs within the Oracle WebLogic Server layer of the framework.
<b>PeopleSoft System</b>	A group of targets that are associated with a particular PeopleSoft application database. Depending upon how many PeopleSoft applications you have installed, you may have multiple PeopleSoft Systems to manage.
<b>PeopleSoft Global Unique Identifier (GUID)</b>	<p>A unique identifier for each PeopleSoft database. The GUID ties each target to a specific database and defines all targets referencing the same database GUID as a system. The GUID is generated and stored at the database layer. During the discovery process, the application server connects to the PeopleSoft application database and retrieves the GUID for that database.</p> <p>This value is derived from the PeopleTools PSOPTIONS table.</p>

<b>Region</b>	A region is a visual box with a title that can be expanded and collapsed. Regions can have charts, tables, label and value pairs, Chiclets, standard web widgets, and other UI elements.
<b>Rules</b>	Define the desired behavior or characteristics of systems. By using preconfigured or custom rules, automated assessments of systems and applications are performed. Through violation messages, you are notified of any deviations, such as inappropriate settings or incorrect system configurations.
<b>Preferred Credentials</b>	Simplify access to managed targets by storing target login credentials in the Management Repository. With preferred credentials set, users can access a target that recognizes those credentials without being prompted to log in to the target's host machine. Preferred credentials are set on a per user and per target basis, ensuring the security of the environment.
<b>Service</b>	<p>An entity that models a business process or application.</p> <p>Examples of services are HCM applications, online banking, and email services. You can define services by creating one or more service tests that simulate common end-user functions.</p> <p>Using these service tests, you can measure the performance and availability of critical business functions, receive Incidents when there is a problem, identify common issues, and diagnose causes of failures.</p>
<b>System</b>	A set of targets (hosts, databases, application servers, and so on) that function together to host one or more applications or services.
<b>Super Administrator Account</b>	<p>Can manage all other administrator accounts and set up all administrator credentials. In addition, the super administrator can:</p> <ul style="list-style-type: none"><li>• Create privileges and roles.</li><li>• Perform the initial setup of Enterprise Manager.</li><li>• Add targets to Enterprise Manager.</li><li>• Perform actions on targets in the system.</li></ul> <hr/> <p><b>Note:</b> Enterprise Manager is installed with a default super administrator account named SYSMAN. You use the SYSMAN account for the initial login to Enterprise Manager. Then, create new super administrator accounts as needed in your system.</p> <hr/>
<b>Train</b>	The train is a guided workflow or wizard that walks users through a sequence of steps by stringing together a series of pages. The objective of these steps is to guide users through the task of achieving a specific goal.

**Topology Viewer**

Enables you to view the relationships between targets within the context of a system. You can perform some management actions from this view.

**Features of the PeopleSoft Application Management Plug-in**

The PeopleSoft Application Management Plug-in:

- Installs into and integrates with the Oracle Enterprise Management System.
- Discovers and registers PeopleSoft targets.
- Monitors and manages PeopleSoft targets, which includes viewing performance metrics and performing actions such as start, stop, configure, and other specific tasks relevant to each target type.
- Submits and monitors Process Scheduler requests.
- Displays configuration data in a graphical user interface driven by metadata.

This ensures that you enter appropriate values and helps limit potential errors in configuration.

- Provides log management for PeopleSoft targets, including the ability to search, view, export, and purge log files.
- Creates a PeopleSoft system in Enterprise Manager based on the database.

This enables you to group all the targets in the system related to a PeopleSoft application database.

- Generates a graphical topology that displays the relationships between targets.
- Creates a *service* that simulates a transaction, such as login and logout, to monitor the availability of an application.

Using the Enterprise Manager Service Level Monitoring feature, you can also check the availability of a system or a feature of an application.

The PeopleSoft Application Management Plug—in delivers a login and logout transaction service for a PeopleSoft system.

- Provides custom Compliance rules to evaluate configuration data for PeopleSoft target types.

**Managing User Accounts**

Defining user access for the Enterprise Manager and the PeopleSoft targets is important and should be considered prior to installing the PeopleSoft AMP to ensure you are aware of all the implications of the options. The options for managing the user accounts you use for installing, configuring, and implementing the PeopleSoft AMP are discussed in detail in the installation instructions.

See Also

Installation Guide: PeopleSoft Application Management Plug-in 13.2.1.1.0 for Oracle Enterprise Manager 13c.

## PeopleSoft Application Management Plug-in Installation

You install the PeopleSoft Application Management Plug-in after you have installed the Oracle Enterprise Manager software and PeopleTools.

For detailed information about Enterprise Manager features, benefits, documentation, and downloads refer to the Oracle Enterprise Manager 13c overview page on the Oracle Technology Network.

For information related to the version of Oracle Enterprise Manager Cloud Control software that is required for the PeopleSoft Enterprise Manager Plug-in, see the PeopleSoft certification information posted on My Oracle Support.

See, [Oracle Enterprise Manager Cloud Control Documentation 13c Release 1](#)

## PeopleSoft Target Discovery

After you have installed all of the required software, you can begin the discovery of the PeopleSoft targets. PeopleSoft targets refer to the elements of a PeopleSoft environment, such as an application server, application database, PeopleSoft website, and so on.

The discovery process identifies and registers PeopleSoft targets in Enterprise Manager so that they can be monitored and managed.

Discovery is the process of searching for and registering PeopleSoft targets so that Enterprise Manager can monitor and manage them. It is the first step to be performed after you have installed all of the required software.

During this process, you use a series of Enterprise Manager screens to:

- Select the target types to be discovered.
- Enter credentials so that Enterprise Manager has access to the host where discovery is to be performed.
- Register the discovered targets in Enterprise Manager.
- Enter the information required to connect to the PROCESSREQUEST web service.
- Identify and register the Process Monitor target.
- Set environment variables needed to connect to the PeopleSoft application database.
- Identify and register the associated application database.
- Review the registered targets.

---

## Understanding PeopleSoft Target Types

After the PeopleSoft targets have been discovered you can begin monitoring and managing PeopleSoft systems and targets. Concepts and tasks relating to systems and targets are discussed in individual chapters devoted to each target type.

## PeopleSoft Target Types

The following PeopleSoft specific target types allow monitoring and management of a PeopleSoft environment:

<b>PS Application Database (PS App DB)</b>	Refers to the PeopleSoft application database running the application, such as CRM or HCM. There can only be one PeopleSoft application for each installed application database.
<b>PS Application Server Domain</b>	Key target type of a PeopleSoft environment. It does all of the complex logic and computations and builds the contents that the web server uses to display pages.
<b>PS Process Scheduler Domain</b>	Enables batch job scheduling and processing.
<b>PS Process Monitor</b>	Enables you to monitor and submit processes configured to run on a Process Scheduler server.
<b>PS PIA</b>	Allows Enterprise Manager to manage the PIA component. It corresponds to a <i>Web domain</i> in Weblogic, <i>server</i> in WebSphere, and <i>application/OC4J</i> in OAS (used for some pre-PeopleTools 8.50 implementations). This target type contains one or more PS Web Site targets.
<b>PS Web Site</b>	Comprises the specific web application and its corresponding HTML files, image files and resource files. It also includes configurations and page content. PS Web Site targets always belong to a PS PIA target.
<b>PS Search Server Domain</b>	Refers to a remote server running Verity search requests for one or more application server domains.

## Chapter 2

# Understanding PeopleSoft Application Management Plug-in Pages

## Understanding PeopleSoft Application Management Plug-in Pages

This section discusses:

- The Enterprise Manager homepage.
- The All PeopleSoft Targets homepage.
- The common elements used on the PeopleSoft target domain pages.

### Understanding the Enterprise Manager Homepage

The Enterprise Manager homepage gives you a high-level view of the overall status of all the targets being monitored. It summarizes key information, such as availability across all managed targets, open alerts, rule violations, and recent problems with job executions. Links on this page enable you to drill down to access detailed performance information.

The homepage is the first page that appears when you log on to Enterprise Manager.

#### Image: Oracle Enterprise Manager Homepage

This example illustrates the fields and controls on the Oracle Enterprise Manager Homepage.

The screenshot shows the Oracle Enterprise Manager Cloud Control 13c homepage. The page is titled "Enterprise Summary" and includes several sections:

- Overview:** Shows "All Targets (41)" and "Targets with Status: 29". A green circle indicates "Up (29)" with a "100%" status.
- Incidents:** Shows "Updated in the last 24 hours: 3" and "Updated in last 7 days: 4". A table below shows a breakdown of incidents updated in the last 7 days by category: Availability (1), Performance (-), Security (-), and Others (3).
- Problems:** Shows "Total Open: 2", "Updated in the last 24 hours: 2", and "Without Service Request: 2".
- Jobs:** Shows "Suspended Executions: 0", "Problem Executions: 0", and "Action Required Executions: 0", all with green checkmarks.
- Inventory and Usage:** Shows "No data to display".
- Compliance Summary:** Shows "Average Compliance Score (%): 100" for "Security Recommendations For Oracle Products".
- Patch Recommendations:** Shows "Patch recommendations are not available." and a warning message: "My Oracle Support preferred credential is not set for any super user. Either set the preferred credentials or change the connection setting to offline and manually upload the metadata required for generating patch recommendations." No recommendations are reported.

# Understanding the All PeopleSoft Targets Homepage


The All PeopleSoft Targets page lists and displays the summary of all the PeopleSoft targets discovered and registered in Enterprise Manager. You can filter the view so that only specific target types are shown.

Access the All PeopleSoft Targets page to create, discover, organize, access, search, and monitor PeopleSoft targets ( Targets, PeopleSoft ).

**Note:** The target types that are displayed depend on the access rights or privileges that have been set for the user.

## Image: All PeopleSoft Targets page

This example illustrates the fields and controls on the All PeopleSoft Targets page. You can find definitions for the fields and controls later on this page.

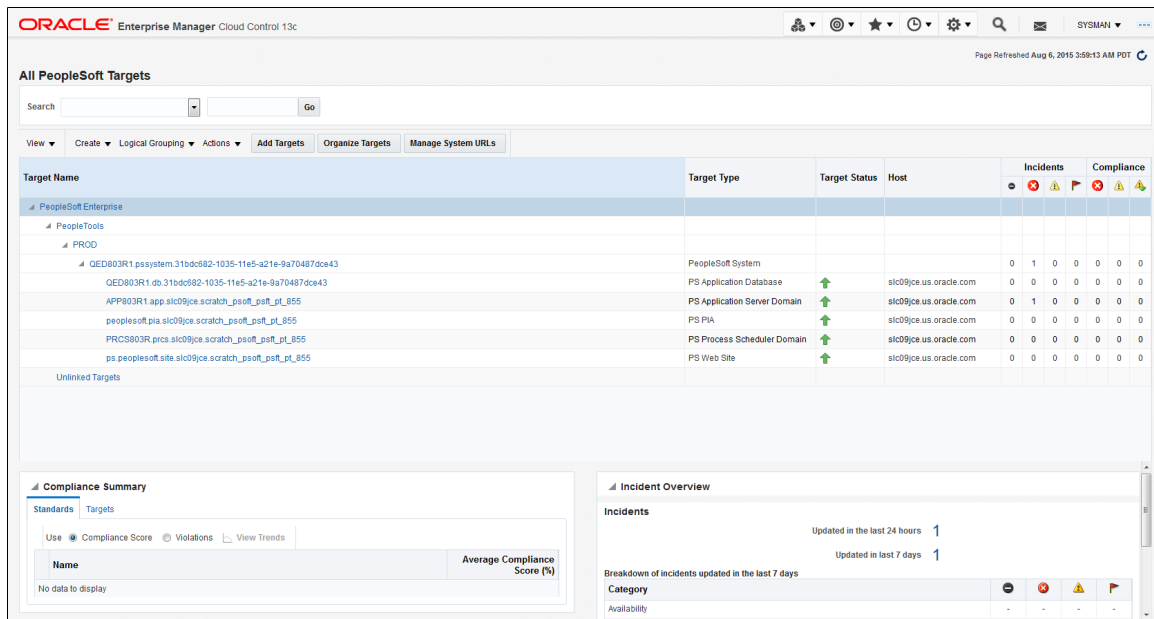

Click this to show the most current status of the targets. .

### Search

Select a target type to search for a specify target.

For example, to search for only application server domains, select *PS Application Server Domain* from the Search list and then click Go.

### View

Select a view type to determine how the PeopleSoft targets will be grouped.

For more information about viewing target types, see [Viewing PeopleSoft Targets on the All PeopleSoft Targets Page](#).

### Create

Use this to create an application server, process scheduler server, search server domain, and PIA domain from the Enterprise Manager Console.



The commands that is submitted from the Enterprise Manager are handled by an API layer that captures the commands and submits the appropriate, native, command line options on the host for the server type. For example, submitting the "configure domain" option in Enterprise Manager runs the following PSADMIN command:

```
psadmin -c configure -d domain
```

For more information about creating PS Application Server targets, see [Creating PeopleSoft Application Server Domain Targets](#).

## Logical Grouping

Click this to view the PeopleSoft targets by:

- *Logical Group By Apps:* Displays the PeopleSoft targets according to the logical groups. Each target appears within an expandable node hierarchy grouped by PeopleSoft application or custom category in the order you choose. This enables you to easily identify and administer targets associated with a specific PeopleSoft application, such as HCM, or associated with a specific category of system, such as production, test, or demonstration.

See [Organizing PeopleSoft Targets](#).

- *Host Based Grouping:* Displays the PeopleSoft targets according to the host on which they run. Each target appears within an expandable node representing the host. For example, if you need to bring down a server host for maintenance, you can view by host to identify the targets affected.

---

**Note:** PeopleSoft targets not belonging to any logical group appear under Unlinked Targets. If, for example, a PS Application Database with child targets is removed from the environment, the system moves the child targets to Unlinked Targets to indicate that they are "orphaned."

---



---

**Note:** Just after discovery, PeopleSoft targets may appear under Unlinked Targets until after a successful configuration collection.

---

## Actions

Click this to start, stop or remove selected PeopleSoft targets.

## Add Targets

Click this to discover and register all valid PeopleSoft targets of your host in Enterprise Manager.

See, [Adding Targets](#) and [Understanding the Discovery Process](#).

## Organize Targets

Click this to access the Setup Logical Grouping page, where you can customize how PeopleSoft targets are grouped and displayed.

For more information about organizing targets, see [Organizing PeopleSoft Targets](#).

**Target Name**

Lists the targets discovered.

**Target Type**

Specify the target types. For more information about target types, see [Understanding PeopleSoft Target Types](#).

**Target Status**

Specifies whether the target is running or has stopped.

**Host**

Specifies the host URL on which the target is running.

**Incidents**

Displays incidents that are generated. An alert is generated when a metric threshold value is reached. The most recent alerts are listed first. By clicking a specific alert message, you can drill down to explicit details about the metric in the alert.

**Compliance**

Delivers the rules and standards and deviations to system or application. For example, deviations about inappropriate settings and incorrect system configuration will be displayed.

**Framework**

Click to displays the industry-specified best practices guideline that deals with the underlying IT infrastructure, applications, business services, processes and how they are organized, managed, and monitored.

**Standard**

Click to displays the EM’s representation of a compliance control that must be tested against some set of IT infrastructure to determine if the control is being followed.

**Incidents**

Displays incidents that are generated. An alert is generated when a metric threshold value is reached. The most recent alerts are listed first. By clicking a specific alert message, you can drill down to explicit details about the metric in the alert.

## Viewing PeopleSoft Targets on the All PeopleSoft Targets Page

On the All PeopleSoft Targets homepage, click the View tab.

**Image: All PeopleSoft Targets - View Tab**

This example illustrates the fields and controls on the All PeopleSoft Targets page - View list. You can find the definition of the fields and controls later on this page.

Target Name	Target Type	Target Status	Host	Incidents	Compliance
system.31bdc682-1035-11e5-a21e-9a70487dce43	PeopleSoft System			0	1
1.db.31bdc682-1035-11e5-a21e-9a70487dce43	PS Application Database	↑	slc09jce.us.oracle.com	0	0
1.app.slc09jce.scratch_psoft_pstl_pt_855	PS Application Server Domain	↑	slc09jce.us.oracle.com	0	1
peoplesoft.pia.slc09jce.scratch_psoft_pstl_pt_855	PS PIA	↑	slc09jce.us.oracle.com	0	0
PRCSB03R.prcs.slc09jce.scratch_psoft_pstl_pt_855	PS Process Scheduler Domain	↑	slc09jce.us.oracle.com	0	0
ps.peoplesoft.site.slc09jce.scratch_psoft_pstl_pt_855	PS Web Site	↑	slc09jce.us.oracle.com	0	0

**Column**

Click this to specify the columns on the All PeopleSoft Targets page. You can choose to show all the columns or display specific columns, such as, Target Type, Target Status, and Host.

**Expand All**

Click this to expand the list of targets in the Target Name column.

**Collapse All**

Click this to collapse the list of targets in the Target Name column.

**Reorder Column**

Click this to reposition the columns.

On the Reorder Column dialog box, click a column name and use the arrows to reorder.

## Creating PeopleSoft Targets

On the All PeopleSoft Targets homepage, click the Create tab.

**Image: All PeopleSoft Targets - Create Tab**

This example illustrates the fields and controls on the All PeopleSoft Targets page - Create list. You can find the definition of the fields and controls later on this page.

Target Name	Target Type	Target Status	Host	Incidents	Compliance
PS Application Server					
PS Process Scheduler					
PS PIA					
PS Search Server					
PRCD					
QED803R1.pssystem.31bdc82-1035-11e5-a21e-9a70487dce43	PeopleSoft System			0 1 0 0 0 0 0 0	
QED803R1.db.31bdc82-1035-11e5-a21e-9a70487dce43	PS Application Database	↑	slc09jce.us.oracle.com	0 0 0 0 0 0 0 0	
APP803R1.app.slc09jce.scratch_psoft_pst_855	PS Application Server Domain	↑	slc09jce.us.oracle.com	0 1 0 0 0 0 0 0	
peoplesoft.pia.slc09jce.scratch_psoft_pst_855	PS PIA	↑	slc09jce.us.oracle.com	0 0 0 0 0 0 0 0	
PRCS803R.prcs.slc09jce.scratch_psoft_pst_855	PS Process Scheduler Domain	↑	slc09jce.us.oracle.com	0 0 0 0 0 0 0 0	
ps.peoplesoft.site.slc09jce.scratch_psoft_pst_855	PS Web Site	↑	slc09jce.us.oracle.com	0 0 0 0 0 0 0 0	

PS Application Server

See [Creating PeopleSoft Application Server Domain Targets](#).

PS Process Scheduler

See [Creating PS Process Scheduler Domain Targets](#).

PS PIA

See [Creating PeopleSoft PIA Domains Target](#).

PS Search Server

See [Creating a PS Search Server Domain](#).

## Adding Targets

The first discovery process should be run on a host containing any of the Tuxedo-based domain targets, which are PS Application Server, PS Process Scheduler, and PS Search Server Domains. The host should have the same time zone as the PS Application Database to which it's connected, and the same timezone of most of the other PeopleSoft servers or hosts. During this initial discovery, the system expects that the PS Application Database will be also be discovered.

The PeopleSoft Application Management Plug—in can monitor only PS Application Databases from Tuxedo domain targets that are in the same timezone. When the database is registered in Enterprise Manager, it must be the database of most of the Tuxedo domain targets.

For example, assume you have a PeopleSoft environment with four UNIX servers with PS Application Server domains in one timezone and one Windows server with a Process Scheduler domain in another timezone. You should execute the first discovery on one of the four UNIX servers. You should not execute the discovery first on the Windows server.

---

**Note:** You must first set up the preferred credential for the host before starting the discovery.

---

To add targets, follow these steps:

1. Select Targets, PeopleSoft., Add Targets.

**Image: Add PeopleSoft Targets : Discovery Inputs page**

This example illustrates the fields and controls on the Add PeopleSoft Targets : Discovery Inputs page. You can find definition for the fields and controls later on this page.



From this page, you can select one or more target types for the discovery process running on a single host.

**PeopleSoft Target Types**

All target types are selected by default. The PS\_HOME/PS\_CFG\_HOME target check box cannot be cleared because Enterprise Manager must discover it first to establish the basis of the PeopleSoft system. When the PS\_HOME and PS\_CFG\_HOME directories are found, the search continues for any PeopleSoft targets present (for example, an application server, web server, Process Scheduler, and so on).

A PS Web Site cannot be registered without a parent PS PIA target having been registered in a current or a previous discovery process.

---

**Note:** Beginning with PeopleTools 8.50, with decoupled PIA\_HOMEs and PS\_CFG\_HOMEs, provide the path to PS\_CFG\_HOME or PIA\_HOME. If PS\_HOME is secure (read-only) it may not contain any targets. The discovery process will discover all the selected targets in the specified path.

---

**Host**

Select the host on which your desired targets run. The system verifies that you have entered a valid host.

---

**Note:** The list of hosts only displays those hosts on which Enterprise Manager agents have been installed and registered with the OMS. By default, the system displays all hosts on which a registered Enterprise Manager agent exists, regardless of whether any PeopleSoft elements have been installed on that host.

---

### Discovery Path

Enter the paths from which the search (crawl) should begin. Separate multiple paths with a semicolon.

The path should include PS\_HOME, PS\_CFG\_HOME, and PIA\_HOME, (as appropriate for your installation). A path with spaces should be enclosed with double quotes. For example:

```
"c:\Program Files(x86)\psft\pt\853"
```

---

**Note:** The discovery path does not support UNC mapping. The discovery path should contain only local drives. The PeopleSoft AMP does support a remote/shared read-only PS\_HOME (with a UNC path) for Windows (on PeopleTools 8.50 or later). PS\_CFG\_HOME should be a local folder and provided in the discovery path. If the PS\_CFG\_HOME points to a remote PS\_HOME (UNC path), PeopleSoft AMP discovers it.

---

### Crawl Depth

Specify the number of nested directories that an agent crawls during the discovery process. The default is 2.

Crawl depth applies to each directory entered in the discovery path. For example, if you specify a value of 3 and have more than one discovery path listed, the agent searches 3 levels in each directory.

2. Click Next. to enter the credentials for the host machine on which you want to run the discovery process.

You can either choose a preferred or a named credential for the selected host. The credential appearing on this screen would become the preferred and monitoring credential of the target.

---

**Note:** This credential for the host must match the user ID of the user who installed the PeopleTools environment on the host.

---

Click Next to view the discovery result on the Add PeopleSoft Targets : Discovery Results page.


3. Select a target and click Next to display the PeopleSoft targets whose databases are discovered.

The Add PeopleSoft Targets : Discover Database page appears showing a list of targets for which environment variables may need to be set.

- On the Add PeopleSoft Targets : Discover Database page, specify any required environment variables.

**Image: Add PeopleSoft Targets : Discover Database page**

This example illustrates the fields and controls on the Add PeopleSoft Targets : Discovery Database page. You can find definition for the fields and controls later on this page.

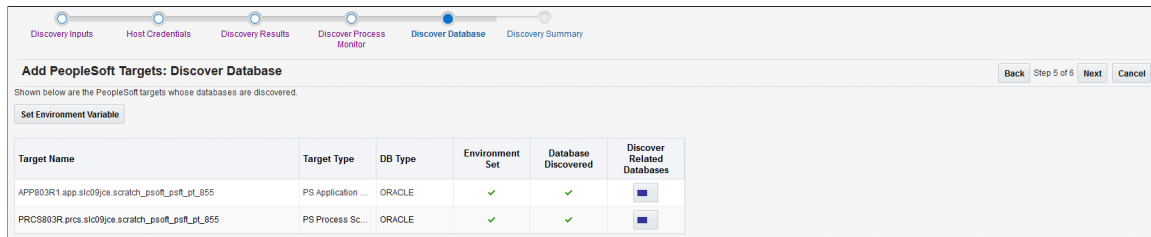

Select a target and then set the parameters.

**Set Environment Variables**

Click to configure settings that enable connection to an application database.

See [Setting Environment Variables](#).

**Target Name**

Name of the PS Application Server Domain, Process Scheduler Domain, or PS Search Server Domain that can have a PS Application Database.

This value displays as a link to the target homepage, which you can select to open in a new window.

**Target Type**

The type of target being registered.

**DB Type**

The type of database to which the target is connecting.

**Environment Set**

Shows a green check mark when environment variables have been set for the database (if required for a specific database type). Shows a red X when environment variables have not been set.

The environment variables referred to in this field are database connectivity parameters and vary depending on the database type.

**Databases Discovered**

Shows a green check mark when the application database is successfully discovered which means that Enterprise Manager can collect configuration data from the target and collect the PeopleSoft GUID from the application database.

Shows a red X when discovery is unsuccessful. Possible reasons are:

- The environment variables have not been set correctly. Verify them on the Set Environment Variables page.
- The database information is incorrect. Select the target to open it in a new window. Select the Administration

tab, then Configure Domain to display configuration data. Validate database information here.

- The configuration collection has failed. Select the link for the target in the Name column. The target homepage appears where you can check for metric collection errors displayed above the Incidents section.

**Discover Related Databases**

Click this icon to initiate discovery.

5. Click OK on the Add PeopleSoft Targets : Discovery Summary page.

This registers the targets and the target discovered appears on the All PeopleSoft page.

---

**Note:** When the Percentage of Memory Growth parameter in the [PSAPPSRV] section of the application server domain configuration file (psappsrv.cfg) is uncommented, then the parameter needs to be uncommented in the corresponding metadata file, psappsrv.cfx, as well. This will ensure successful discovery of the PS Application Server Domain Target and Application Database Target when this parameter is uncommented.

---

**Note:** For Solaris platforms, to ensure successful discovery, unset LD\_LIBRARY\_PATH\_64 environment variable. Do this by adding `unset LD_LIBRARY_PATH_64` to the .profile or in the psemenv.sh script accordingly.

---

**Note:** For Windows platform, use the same user name as the host to log on. The discovery fails if the user enters the domain\_name\user\_name to log into the host.

---

### Setting up Preferred Credential

To set up the preferred credential:

1. Select Setup, Security, Preferred Credentials.
2. Click a host to set the preferred credential.

### Working With Target Naming Conventions

Enterprise Manager requires that all discovered targets be assigned a unique name that serves as the target's key.

<i>Target Type</i>	<i>Naming Convention</i>	<i>Example</i>
PS Application Database	<DBName>+db.+<PeopleSoft GUID>	CRMPRD.db.66ce0b93-85bb-11d9-92af-fa37c30c4526  where DBName = CRMPRD  GUID = 66ce0b93-85bb-11d9-92af-fa37c30c4526

<b>Target Type</b>	<b>Naming Convention</b>	<b>Example</b>
PS Application Server Domain	<domain>+app+<host>+<PS_HOME>	CNVCRM.app.server1.usr_local  where  domain = CNVCRM  Host = server1  PS_HOME = /usr/local
PS Process Scheduler Server Domain	<domain>+prcs+<host>+<PS_CFG_HOME>	CNVCRM.prcs.server1.usr_local
PS Search Server Domain	<domain>+srch+<host>+<PS_CFG_HOME>	CNVCRM.srch.server1.usr_local
PS PIA using WebLogic or WebSphere	<PIA domain name>+pia+<host>+<PS_HOME>	peoplesoft.pia.server1.usr_local  where PIA domain name = peoplesoft
PS Web Sites using WebLogic or WebSphere	<site name.PIA domain name>+site+<host>+<PS_HOME>	ps.peoplesoft.site.server1.usr_local  where site name = ps
PS Process Monitor	prcs-mntr.<protocol>.<host>.<port>.<wsdl file name>	prcs-mntr.http.pta137.10180.  PROCESSREQUEST_1_wsdl

Additional naming conventions:

- If the host name has the fully qualified DNS name, the name server1.peoplesoft.com becomes server1.
- A Windows path, for example C:\ptinstall\appserv, becomes c\_ptinstall\_appserv. Any dots (.) or colons (:) are removed, and backslashes (\) and spaces are replaced with an underscore (\_).

## Related Links

[Understanding the Discovery Process](#)



## Organizing PeopleSoft Targets

Access the Setup Logical Grouping page to customize how PeopleSoft targets are logically grouped and displayed. (Click the Organize Targets tab.)

### Image: Setup Logical Grouping

This example illustrates the fields and controls on the Setup Logical Grouping page.

Database Target	PS System Target	App Name	Category Name	Instance Name
QED803R1_db.31bdc682-1035-11e5-a21e-9a70487dce43	QED803R1_pssystem.31bdc682-1035-11e5-a21e-9a70487dce43	PeopleTools	PROD	QED803R1_pssystem.31bdc682-1035-11e5-a21e-9a70487dce43

### Logical View

Enables you to determine how the PeopleSoft targets will be grouped on the All PeopleSoft Targets page. The selection you choose determines the value of the View drop-down

- Logical Group by Apps: When selected, the PeopleSoft targets will be grouped by the App Name value as specified on this page. That is, they will be grouped first by App Name and then by Category Name.
- Logical Group by Category: When selected, the PeopleSoft targets will be grouped by the Category Name value as specified on this page. That is, they will be grouped first by Category Name and then by App Name.

---

**Note:** After PeopleSoft targets are discovered for the first time, Logical Group by Apps is enabled.

---

### Associate unlinked targets to logical groups

Select to add any targets currently under the Unlinked Targets category to your logical groups, based on the unlinked target's association with an existing database.

### Database Target

Displays the database target ID for the database associated with a system.

### PS System Target

Shows the system target ID associated with a specific PeopleSoft system.

### App Name

Enables you to modify display names for PeopleSoft application targets. By default, the system gathers this information from the database type, showing *PeopleTools*, *HCM*, *CRM*, and so on. If you want to modify this value, use the App Name edit box

	to add your custom value. Make sure use a consistent naming convention.
<b>Category Name</b>	Enables you to modify display names for PeopleSoft application targets. By default, the assigned category name is <i>PROD</i> (for <i>Production</i> ), but you may want to add values such as <i>TEST</i> , <i>DEMO</i> , and so on. If you want to modify this value, use the Category Name edit box to add your custom value. Make sure to use a consistent naming convention.
<b>Instance Name</b>	Defaults to the PS System Target ID value, such as <i>Q852107R.pssystem.22af5ff2-4af9-11e0-9d38-91c7730a9ea8</i> . If you'd like to modify this value, use the Instance Name edit box to add your value. You might consider just using the database name, or some other shorter value.
<b>Save</b>	You must click Save for any changes, including Logical View selection to take effect.

---

## Common Elements on Targets Homepages

This section describes the following common elements that appear on PeopleSoft target home pages:

- Monitoring
- Control
- Job Activity
- Information Publisher Reports
- Performance
- Configuration Management
- Domain Management
- Log Management
- Configuration
- Compliance
- Target Setup
- Target Information

---

**Note:** Not all elements will appear on every target homepage. For example, some elements appear only for database targets, while others appear only for Process Scheduler targets.

---

## Monitoring

This table lists the common elements that are available for monitoring targets.

<b>All Metrics</b>	Click this to display all of the metrics defined for the target.
<b>Metrics and Collections Settings</b>	Click this to display the metric thresholds and collection interval for the target.
<b>Metrics Collection Errors</b>	Click this to view the details about the errors encountered while obtaining target metrics. This helps to get the detail of the metric that do not represent the performance of the target accurately.
<b>Status History</b>	<p>Click this to get information about target outages. This information is essential for troubleshooting target related incidents.</p> <p>For more information about status history, see <i>Oracle® Enterprise Manager Cloud Control Getting Started with Oracle Fusion Middleware Management Plug-in Release 12.1.0.5</i>, “Discovering and Monitoring Oracle Business Intelligence Instance and Oracle Essbase”, Viewing Target Status and Availability History.</p>
<b>Incident Manager</b>	<p>Click this to get details about the various events, related to the PeopleSoft target, that negatively impact any hardware or software component. These events require user action.</p> <p>The details provided by this section, such as the incident summary, severity, target, target type, and so on, are essential for troubleshooting.</p>
<b>Alert History</b>	Click this to displays a complete alert history of the target.
<b>Blackouts</b>	Click this to displays the blackouts that have been defined for the target history. You can also set up a blackout from this page.

## Control

Click this to create or end blackouts.

Blackouts allow Enterprise Manager users to suspend management data collection activity on one or more managed targets. For example, administrators use blackouts to prevent data collection during scheduled maintenance or emergency operations. By blacking out the server, alert notifications are not sent.

## Job Activity

Access this to search for a particular job and retrieve job details such as the owner, status, scheduled start time, and so on. From this page, you can perform target job administration tasks, such as creating, editing, suspending, and resuming a job.

## Information Publisher Reports

Access this page to get the summary of the Service Level Agreement Compliance, Actual Service Level Achieved, Key Performance and Usage Metrics, and Status of Key Components.

## Performance

Access the Performance page from the PeopleSoft application domain list.

The Performance page gives you a snapshot of the performance of the domain by displaying a graphical view of the domain's:

---

**Note:** This is an example from PS Application Server Domain Target.

---

- Host CPU usage.
- Host memory usage.
- Disk input/output utilization.
- Average number of queued processes per domain server process.
- PSAPPSRV handler counts.
- Total number of Tuxedo connections.

Use the View Data dropdown list to modify the time frame of the display. For example, you can view the last 24 hours, last week, last month, and so on.

If the PUBSUB (Integration Broker server processes) feature is not active, the graphs for Broker, Subscriber, and Publisher are blank.

The CPU and memory utilization shown on the PS Application Server Domain Performance page includes more detailed information than that on the homepage.

The frequency of the disk I/O (read/write frequency) indicates how much the application server is caching—this value may reflect the performance of the application. It also includes writing to log files.

The amount of queuing on the main processes of a PS Application Server Domain indicates if the defined handlers are sufficient for the domain. Larger queues cause a slow response on application functions, and this could indicate that more handlers or domains are required to handle user requests.

---

**Note:** A statement of no data found may appear in the graphic region. This occurs because there is no target data available in Enterprise Manager when this graph is rendered.

---

For more information about changing the view of performance data, see Enterprise Manager documentation.

## Configuration Management

This table lists the common elements that are available for managing configuration of targets.

### Configure Domain

Click this to access the Configure Domain page to edit domain configurations.

See the product documentation for *PeopleTools: System and Server Administration*, "Working With Domain Configurations"

- If this domain is up *and* the Allow dynamic changes property is selected, only dynamic fields can be edited. All others are disabled.
- If this domain is down, all fields are enabled.

From the Configure Domain page, you can select Configure Environment Variables to edit settings that establish the connection from the domain to the application database.

Depending on the database type of the domain, there are required, default environment settings shown for which you need to provide the appropriate values.

- Configuration details region.
  - Move the mouse over the information icon to display a description of the field.
  - If the dynamic icon is present, it means that the field is dynamic and a restart of the domain is not necessary if there were changes (and if the Allow dynamic changes option is set).
  - Enable check boxes display for some fields to accommodate any commented out properties within the configuration files. If desired, you can enable the commented out properties by selecting the check box.

See [Setting Environment Variables](#).

### Create Like Domain

Click this to import a domain from another PS Application Server Domain or PS Process Scheduler Domain. You can create a like domain only within the same host referencing the same PS\_HOME.

### Copy Configuration

Click this to copy configuration files from an existing domain to another domain within the same host. This overwrites the configuration files on the managed host.

---

**Note:** This feature does not work on domains that are currently running.

---

### Discover Database

Click this to discover the Database associated with this target. This menu provides an alternate way to discover the database target, if they did not get discovered in the main discovery workflow.

See [Understanding the Discovery Process](#).

## Domain Management

This table lists the common elements that are available for domain management of targets.

### Start Domain

Click this to start an individual target.

A serial boot starts server processes in a sequential order, with one process beginning to start after the previous process has completely started.

### Start Domain (Parallel)

Click this to start server processes in parallel. This ensures shorter boot duration.

### Stop Domain

Click this to shut down the domain and is equivalent to the normal shutdown option in PSADMIN.

### Stop Domain (Forced)

Click this to stop an individual target. A forced shutdown is a non-quiet shutdown that immediately terminates all of the processes in the domain. Use forced shutdown only when a Bulletin Board Liaison (BBL) process encounter errors and cannot be shut down normally.

### Delete Domain

Click this to delete the domain on the host and remove it from Enterprise Manager.

---

**Note:** The domain must be down before you can delete.

---

## Log Management Page


Access the Log Management Page to:

- View log files.
- Search for strings in a log file.
- Add and remove log patterns.

### Viewing Log File

#### Image: View Log File page

This example illustrates the fields and controls on the View Log File page. You can find definitions for the fields and controls later on this page.

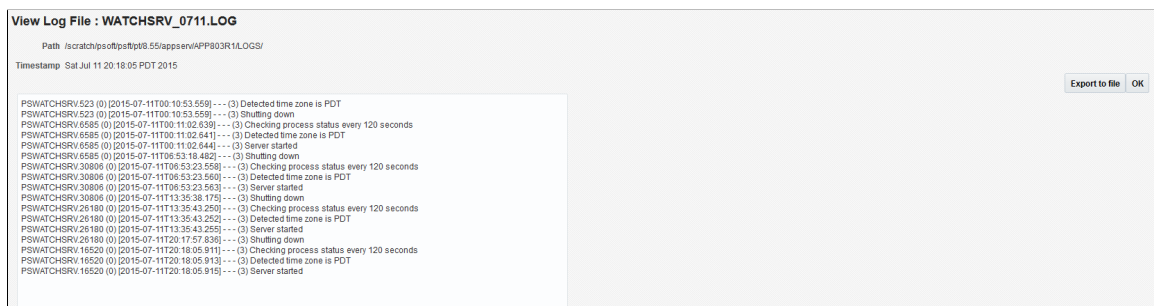

If you have searched for a string, you can also click the link by the line number or the string (in the results area) to display the View Log File page.

The initial view contains 500 lines and the string is the last one shown. Click Previous, Next, Top, or Bottom to navigate through the file.

The log filename is also available within the search results area.

**Refresh**

Click Refresh to refresh the screen.

**Export to file**

Click Export to File to export the log file. You can open the file in the Notepad or save the file to your workstation.

**Searching for Strings in a Log File**

To search for a string in a log file:

1. Click the file you want to search, using the radio button in the Select column.
2. Scroll to the bottom of the Logs page.
3. Enter the desired search string in the Search String edit box.
4. Click Search.
5. In the Search Results Cloud, review the instances of the search string found in the log file.

Instances of the search string appear by line in the Search Results Cloud. The log information displayed includes the line number in the log file in which the string is found, the date and time, the server process involved, and the phrase or sentence containing the string.

**Image: Logs page: Searching Log Files**

This example illustrates the fields and controls on the Logs page: searching log files.

Line #	Date/Time	Process Name	Process ID	Text
5	N/A	PSWATCHSRV	6585	PSWATCHSRV.6585 (0) [2015-07-11T00:11:02.644] --- (3) Server started
9	N/A	PSWATCHSRV	30806	PSWATCHSRV.30806 (0) [2015-07-11T06:53:23.563] --- (3) Server started
13	N/A	PSWATCHSRV	26180	PSWATCHSRV.26180 (0) [2015-07-11T13:35:43.256] --- (3) Server started
17	N/A	PSWATCHSRV	16520	PSWATCHSRV.16520 (0) [2015-07-11T20:18:05.915] --- (3) Server started


Date and Time fields refer to the Date and Time log within the file and not the timestamp of the file.

## Setting up Log Management

On the Logs page, click the Log Management Setup link to display the Log Management Setup page where you can define the log file types to manage for each target. You can add and remove log file types as needed. From this page you can also schedule purge and archive jobs.

### Image: Log Patterns page

This example illustrates the fields and controls on the Log Patterns page.

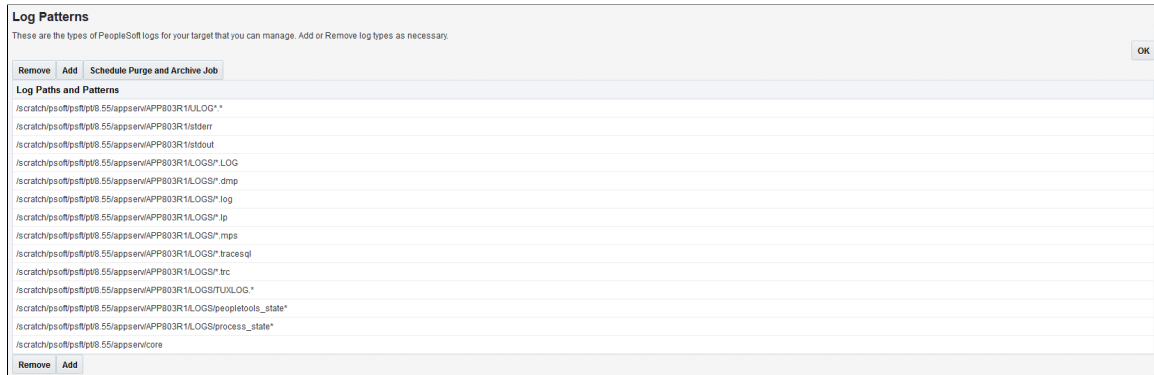

## Configuration

This table lists the common elements that are available for configuration targets.

### Last Collected

Click this to display the latest configuration data. The Last Collected Configuration link enables you to view from a central location key configuration metric and parameters for the target.

### Compare

Click this to compare configurations of multiple nodes. This helps to identify performance bottlenecks caused by configuration changes.

### Comparison Job Activity

Click this to monitor comparison job status.

### Search

Click this to define the search criteria for configuration details across targets.

### History

Click this to display the preserved configurations.

### Save

Click this to save the configuration for a given target.

### Saved

Click this to display the list of saved configurations for a given target.

### Topology

Click this to display the topology configuration of the target type.

## Compliance

This table lists the common elements that are available for viewing compliance of targets.



<b>Results</b>	Click this to evaluate the compliance of PeopleSoft targets and systems for configuration, security, and storage. In addition, compliance results provide advice on how to change configuration to bring the PeopleSoft targets and systems into compliance.
<b>Standard Associations</b>	Click this to associate the compliance standard for a target.
<b>Real-time Observations</b>	Click this to define a search criteria to query the compliance observations in the real time.

## Target Setup

This table lists the common elements that are available for setting up targets.

<b>Monitoring Configuration</b>	Click this to display target properties such as domain name, PS_HOME, and PeopleTools version.
<b>Administrator Access</b>	Click this to display access type and the privilege associated with the target. You can add an administrator to a target.
<b>Remove Target</b>	Click this to remove the current target from the system.
<b>Add to Group</b>	Click this to add a target to a group.
<b>Properties</b>	Click this to view and edit target properties.



## Chapter 3

# Discovering PeopleSoft Targets

---

## Understanding the Discovery Process

Discovery is the process of an agent identifying predefined target types, registering them in Enterprise Manager, and collecting their target properties and initial configuration data. The agent sends this data to the Oracle Management Service, which processes the data and loads it into the Management Repository. From there, Enterprise Manager can access data about the target to monitor and manage it.

---

**Note:** Discovery requires that the Enterprise Manager user be assigned the role of a super administrator.

---

## Understanding Steps in the Discovery Process

The following steps outline how to initiate the discovery of PeopleSoft targets:

- From the PeopleSoft homepage, click Add Targets where you select the target types to be discovered. Specify the host, discovery path for PS\_HOMEs, PS\_CFG\_HOMEs, and PIA\_HOMEs, and subdirectory crawl depth.

See [Adding Targets](#)

- From the Target Credentials page, enter the credentials for the host where discovery executes.
- Select a target from the list of the PeopleSoft targets whose databases are discovered to register the specific target in Enterprise Manager.
- Enter the information required to connect to the PROCESSREQUEST web service.
- Identify and register the Process Monitor target.
- Set environment variables for platforms requiring them, and add a PeopleSoft application database (discovering a PS Application Database target).

See [Adding and Registering Targets](#).

---

**Note:** With the Logical Grouping feature, consider the implications of your choices on the final steps of the discovery process. In the final steps, the interface displays all the targets that the discovery process located. The note on that last screen mentions that you need to click the OK button for the discovered targets to become organized into Logical Groups for display on the All PeopleSoft Targets page. If you do not click OK, then all the targets discovered will display within the Unlinked Targets node. You can organize the targets later into the correct logical grouping structure by using the Associate Unlinked Targets to Logical Groups option on the Setup Logical Grouping screen.

---

## Understanding UNIX Login Shell Support

The PeopleSoft Application Management Plug—in supports the login shell for the user who installed PeopleTools or created domains. This requires the user profile (.profile) to be set prior to discovery of PeopleSoft targets. You must, first, setup the environment variables for PeopleSoft target discovery either in .profile or psemenv.sh script.

Login shell support provides these advantages:

- Automatic discovery of the PS Application Database.
- Setting environment variables for each Tuxedo-based domain is not required.
- Less environment related issues.

When using a login shell, consider the following:

- There is an additional step to create a user profile either in the .profile or psemenv.sh if one does not exist(if one does not exist).
- Only Bourne compatible shells (like sh, bash, and so on) are supported.
- Interactive login profiles are not supported.


## Auto Discovery of Directly Discoverable Targets

The Auto Discovery feature enables you to automatically discover the targets. To discover the targets:

1. Login to Enterprise Manager
2. Navigate to Setup, Add Target, Configure Auto Discovery

### Image: Configure Auto Discovery


#### Configure Auto Discovery

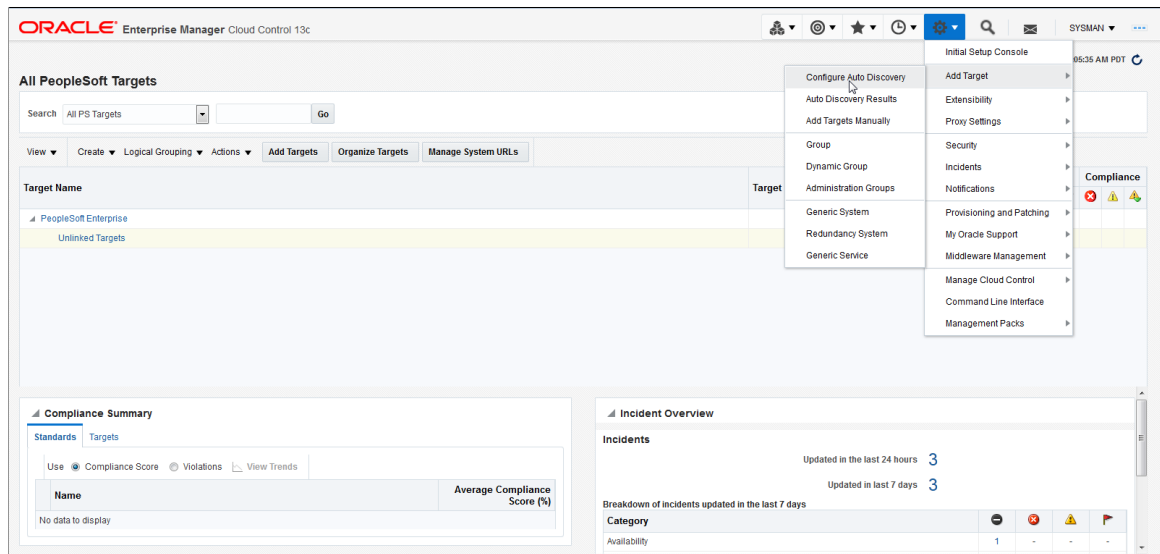

- The Setup Auto Discovery Page Opens. Select the host and click on Discovery Modules.

**Image: Setup Auto Discovery**


Setup Auto Discovery page

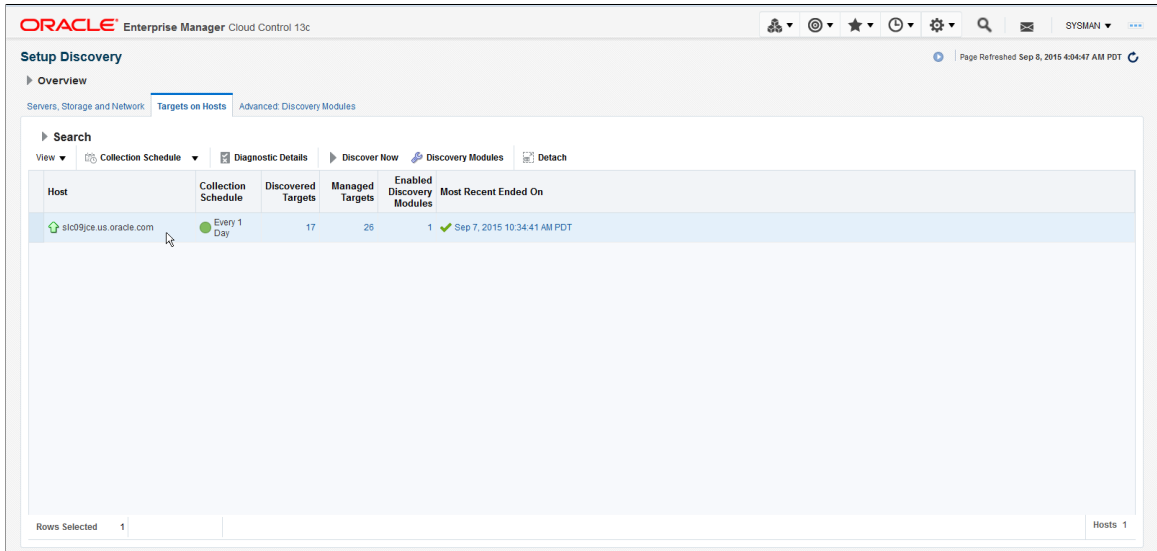

- On the Discovery Modules Page, check the PeopleSoft Targets Discovery Module. As our intention is to discover just the PeopleSoft targets, the other modules can be disabled as they are not in our scope of interest at this point in time.

**Image: PeopleSoft Targets discovery**


PeopleSoft Targets discovery page

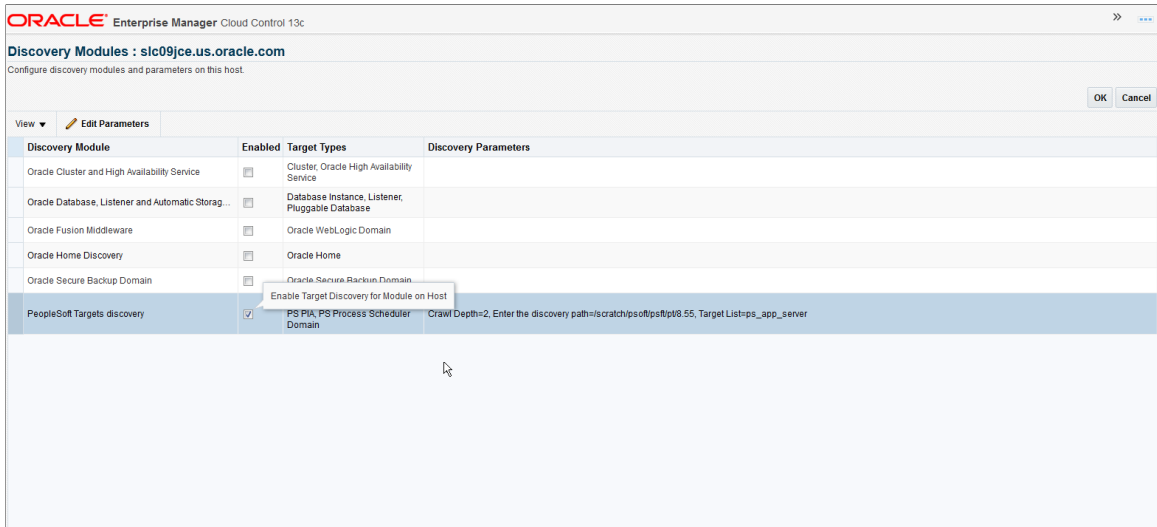

- To Specify the Discovery Parameters, click Edit Parameters and fill out the required info (All Mandatory) as shown in the below screenshot as an example and click OK.

**Image: Edit Parameters**


Edit parameters

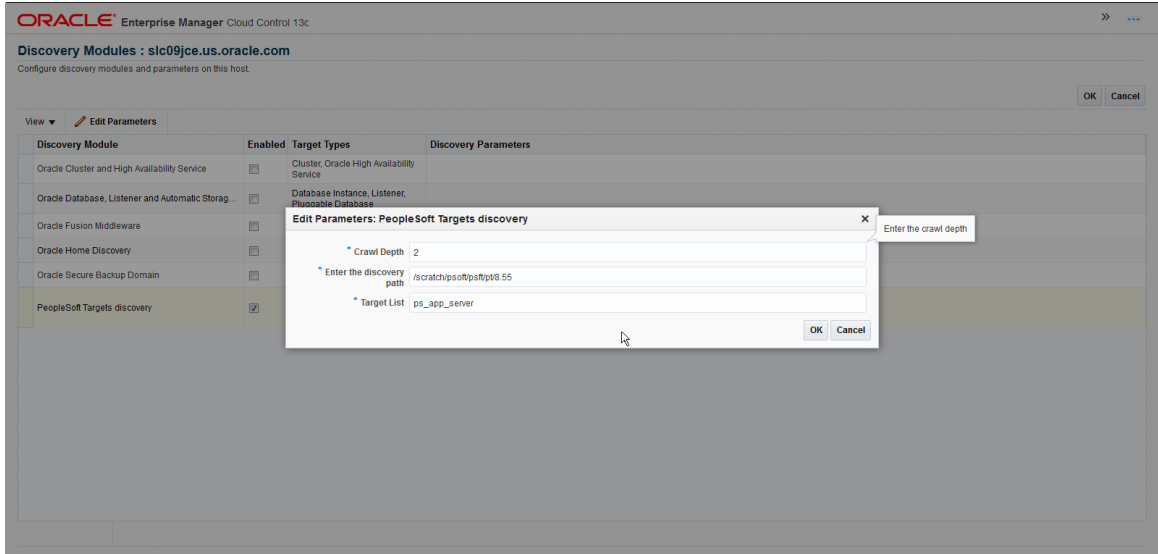

- Navigate back to the Setup Discovery Page and click Discover Now.

**Image: Discover Now**


Discover Now

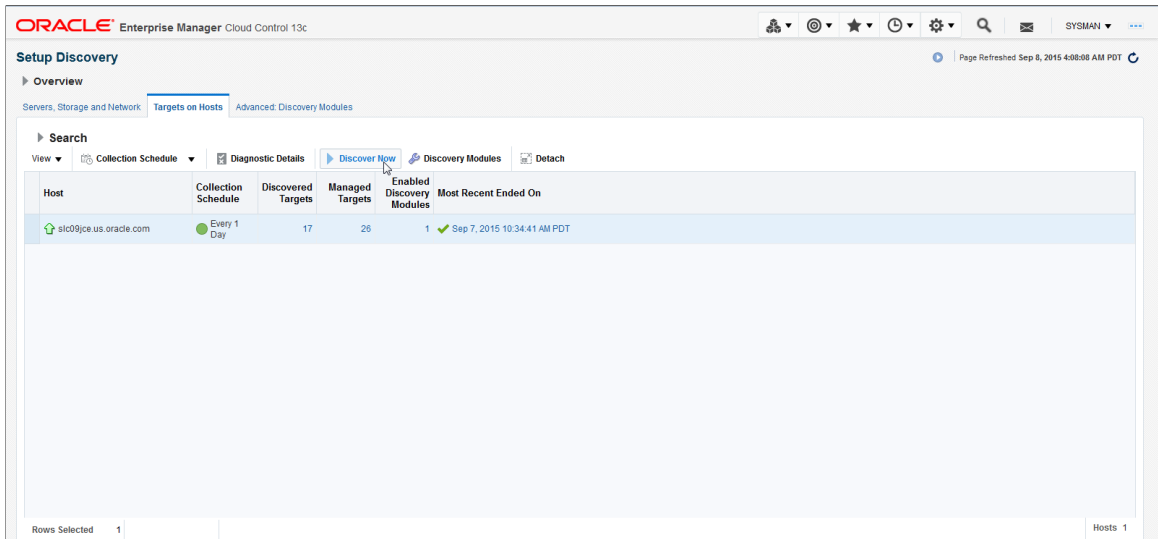

- 7. The Discover Now activity gets initiated.

**Image: Discover Now — In Progress**


Discover Now activity in progress

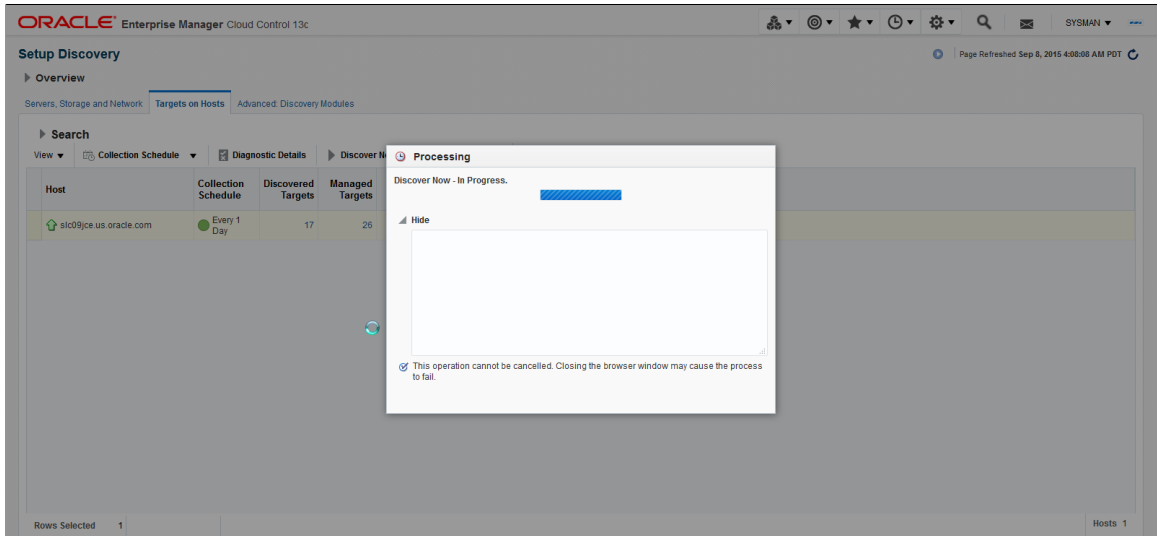

- 8. The Discover Now activity gets completed successfully.

**Image: Discover Now — Completed**


Discover Now activity completed.

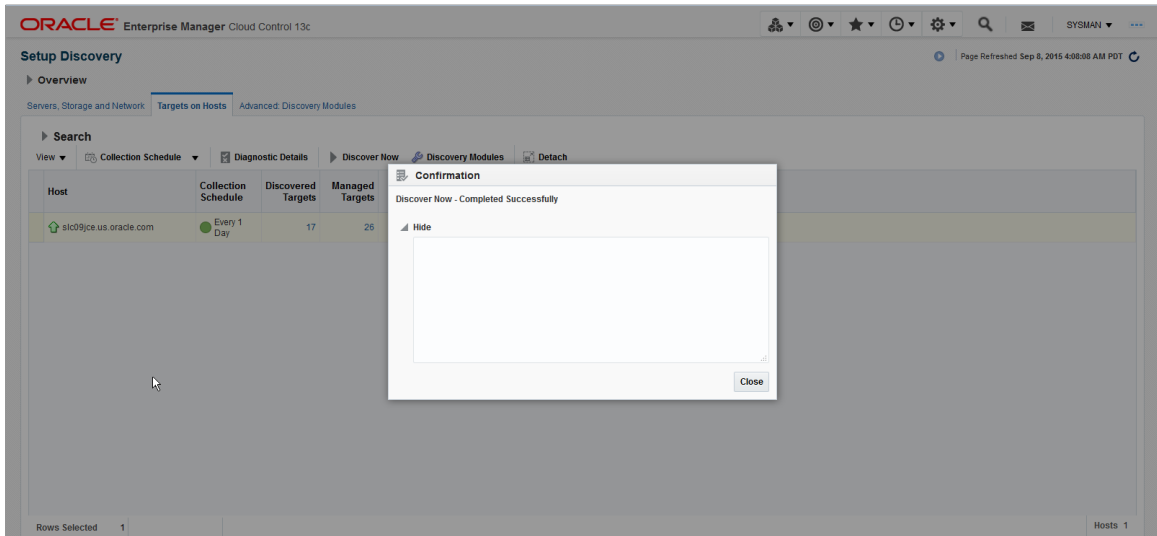

- The results from this run of the discovery module can be seen in the Auto Discovery Results page that can be accessed by clicking on the link in Discovered Targets Column or via Setup, Add Target, Auto Discovery Results

**Image: Auto Discovery results**


Auto Discovery results

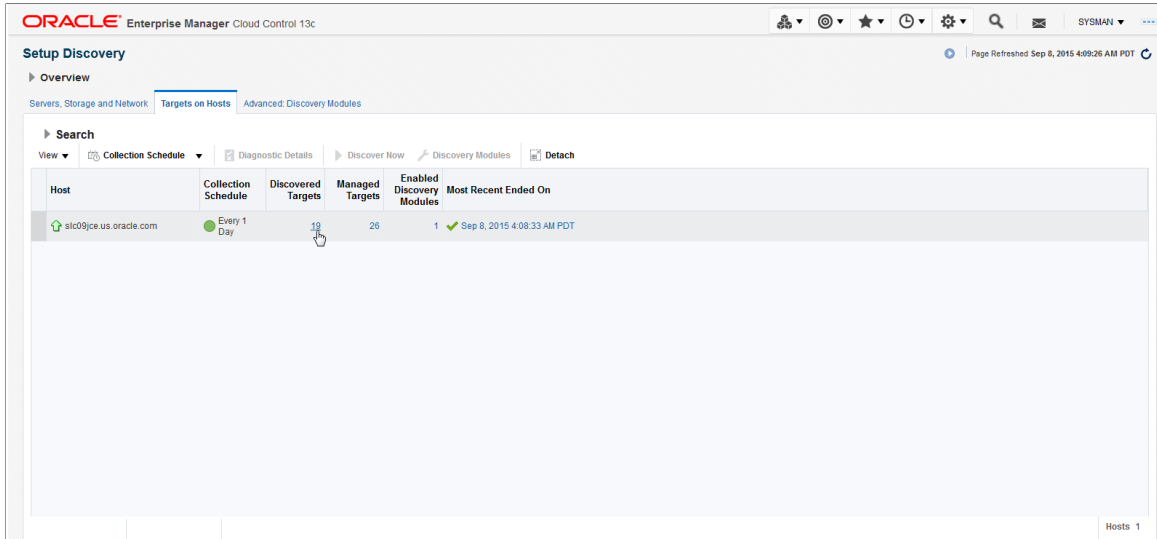

- In the Auto Discovery Results page, the user should see the newly discovered PeopleSoft targets. These targets will be in Not-Yet-Managed (NYM) state and will need to be promoted by assigning Monitoring credentials.

**Image: Promote Targets**

Promote targets

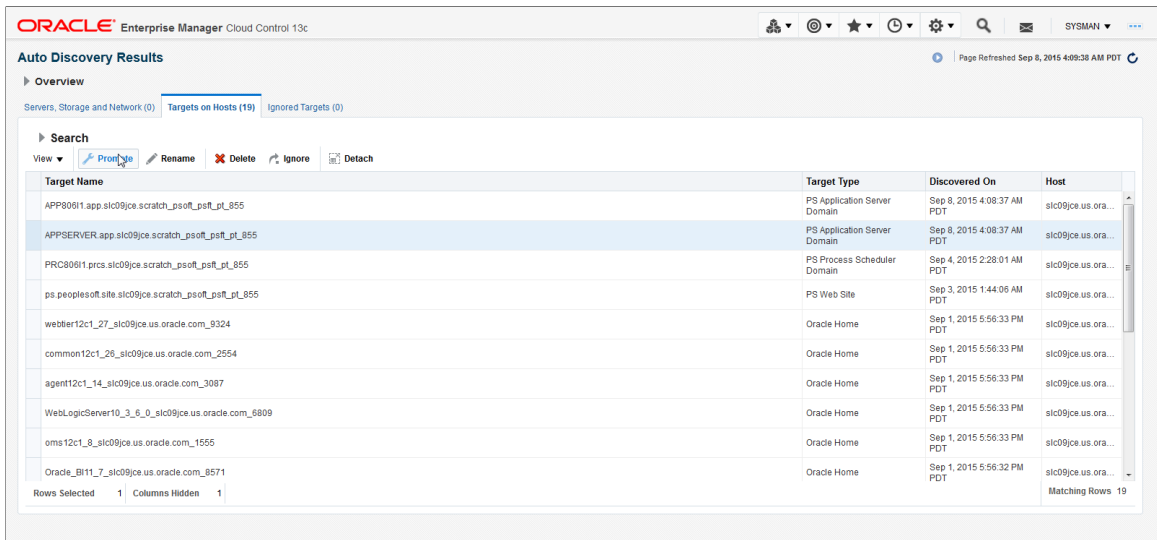



- In the Promote Discovered Target page, fill the details under the PeopleSoft Monitoring Creds, PeopleSoft Secure Command Credentials and PeopleSoft Host Credentials sections and click Promote.

### Image: Promote Discovered Targets

Promote Discovered targets page.

**ORACLE Enterprise Manager Cloud Control 13c**

**Promote Discovered Target**

Configure properties and promote targets to be managed by Enterprise Manager. All required properties must have values in order to promote targets. \*Promote\* will save configured properties and promote the targets. \*Configure Only\* will save configured properties without promoting the targets.

[Promote](#) [Configure Only](#) [Cancel](#)

**Target**

Target Name: APPSERVER.app.slc09jce.scratch\_psoft\_pl\_855  
 Target Type: PS Application Server Domain  
 Host: slc09jce.us.oracle.com  
 Agent: https://slc09jce.us.oracle.com:1838/emd/main/

**Peoplesoft Monitoring Creds**

Credential type: Host Credentials

\* Username: psoft  
 \* Password: \*\*\*\*\*  
 \* Confirm Password: \*\*\*\*\*

**Peoplesoft Secure Command Credentials**

Credential type: SecureCommand  
 Secure Command: TRUE

**Peoplesoft Host Credentials**

Credential type: PsoftHostCreds  
 Username: psoft  
 Password: \*\*\*\*\*

- The target gets Promoted Successfully.

### Image: Promote Target — Success page

Promote Target — Success page

**ORACLE Enterprise Manager Cloud Control 13c**

**Promote Discovered Target**

Configure properties and promote targets to be managed by Enterprise Manager. All required properties must have values in order to promote targets. \*Promote\* will save configured properties and promote the targets. \*Configure Only\* will save configured properties without promoting the targets.

[Promote](#) [Configure Only](#) [Cancel](#)

**Target**

Target Name: APPSERVER.app.slc09jce.scratch\_psoft\_pl\_855  
 Target Type: PS Application Server Domain  
 Host: slc09jce.us.oracle.com  
 Agent: https://slc09jce.us.oracle.com:1838/emd/main/

**Peoplesoft Monitoring Creds**

Credential type: Host Credentials

\* Username: psoft  
 \* Password: \*\*\*\*\*  
 \* Confirm Password: \*\*\*\*\*

**Peoplesoft Secure Command Credentials**

Credential type: SecureCommand  
 Secure Command: TRUE

**Peoplesoft Host Credentials**

Credential type: PsoftHostCreds  
 Username: psoft  
 Password: \*\*\*\*\*

**Confirmation**

Promote Target - Completed Successfully


[Hide](#)

[Close](#)

13. The target shows up on the PeopleSoft Home Page.

**Image: Target on PeopleSoft Home Page**


Target on PeopleSoft Home Page.

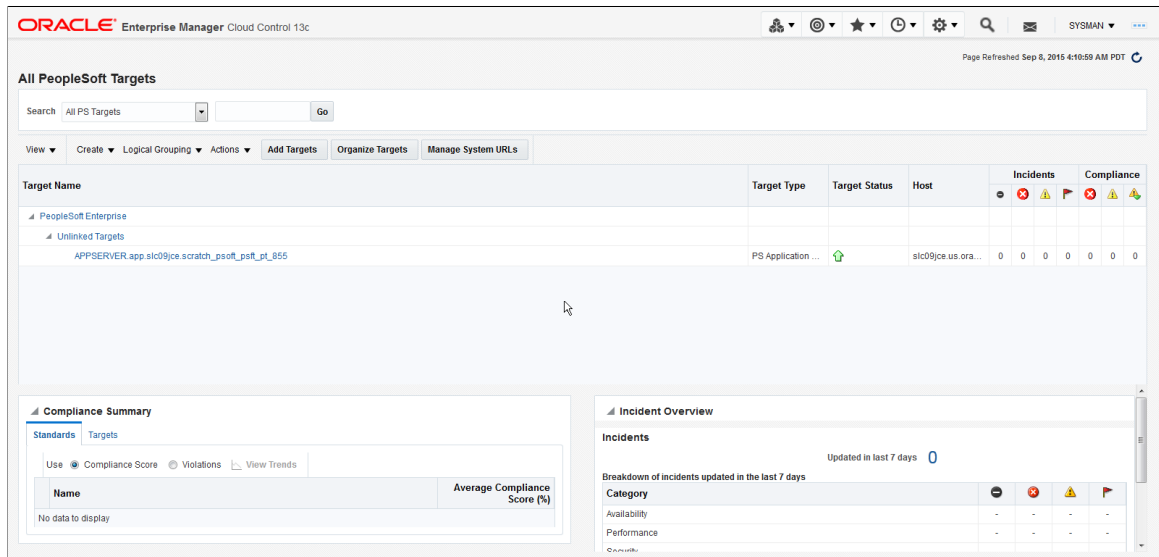

**Note:** If there are errors while running the Auto Discovery module, navigate to Configure Auto Discovery menu, on Targets on Hosts tab, select the desired host target and click the Diagnostic Details button. This page shows the error message from running discovery module. By selecting the PeopleSoft Discovery Module on this Diagnostic Details page, click on Log from Agent button to retrieve logs from Agent side as well.

**Image: Diagnostic Details**

Diagnostic Details

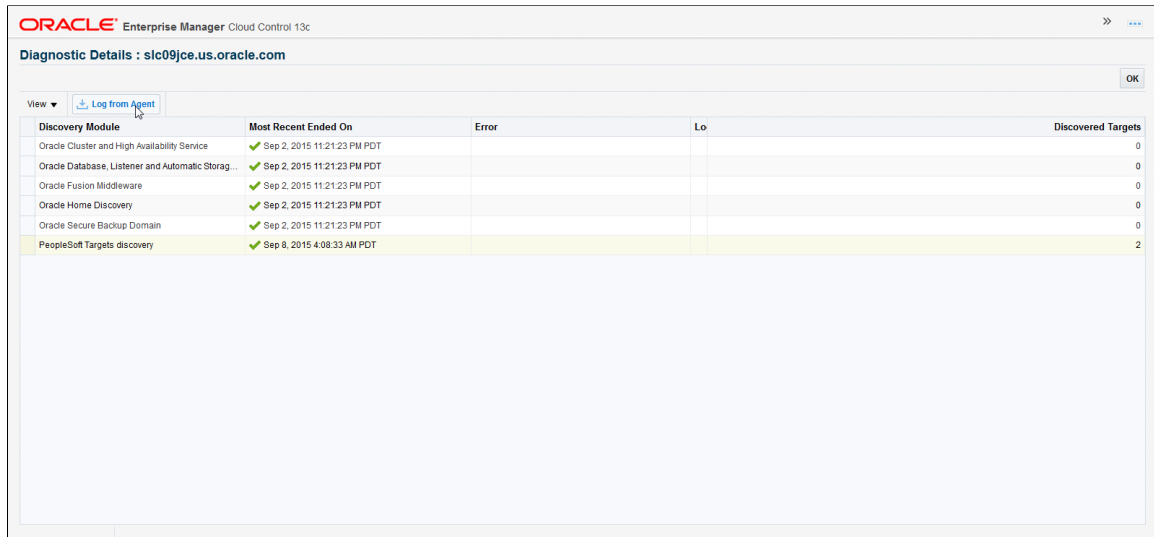

In the above context, the directly discoverable targets are the following:

- PS Application Server

- PS Process Scheduler
- PS Search Server
- PS PIA
- PS Website

The remaining two target types, i.e. PS Application Database and PS Process Monitor will still need to be discovered using either the existing guided discovery flow, or the EMCLI verb discovery approach.

---

## Emcli verb based discovery of targets

There are three verbs defined for:

- `psft_discover_direct_targets`
- `psft_discover_db_targets`
- `psft_discover_prs_mntr_targets`

### Discovering directly discoverable targets

The verb `psft_discover_direct_targets` is used to discover the directly discoverable targets. To do this go to `OMS_BIN` and execute the following:

```
./emcli psft_discover_direct_targets -configFile="/ds1/home/emagent/Oracle/Middlewa→
re/oms/bin/inputDirectTargets.properties"
```

<b>Field Name</b>	<b>Sample Value</b>
host	<HOST_NAME>
crawlDepth	2
targetList	ps_app_serverps_piaps_home
discoveryPath	<PS_CFG_HOME>
credName	NC_PSOFT
credOwner	SYSMAN

### Discovering Database Target

The verb `psft_discover_db_targets` is used to discover the directly discoverable targets. To do this go to `OMS_BIN` and execute the following:

```
./emcli psft_discover_db_targets -configFile="/ds1/home/emagent/Oracle/Middleware/oms/bin/inputDbTargets.properties"
```

<b>Field name</b>	<b>Sample Value</b>
host	S854101R.app.slc06evj.ds1_home_psoft_psft_pt_854
targetName	S854101R.app.slc06evj.ds1_home_psoft_psft_pt_854
targetType	ps_app_server
credName	NC_PSOFT
credOwner	SYSMAN

At this point, only one db target gets discovered and this process does not create the system target. To create a system target and to associate the targets to the system, click the Organize target button and execute the logical grouping test case.

## Discovering the Process Monitor Target

The verb `psft_discover_prcs_mntr_targets` is used to discover the directly discoverable targets. To do this, go to `OMS_BIN` and execute the following:

```
./emcli psft_discover_prcs_mntr_targets - configFile="/ds1/home/emagent/Oracle/Midware/oms/bin/inputPrCsMntrTargets.properties"
```

<b>Field Name</b>	<b>Sample value</b>
host	slc06evj.us.oracle.com
targetType	ps_pia
credName	NC_SLC06EVJ_PSOFT
credOwner	SYSMAN
piaName	S854903R.pia.slc06evj.ds1_home_psoft_psft_pt_854 wsdlUrl=http://<HOST_NAME>:<PORT>/PSIGW/PeopleSoftServiceListeningConnector/QE_LOCAL/PROCESSREQUEST.1.wsdl
userName	QEDMO
userPwd	QEDMO

At this point, only one prcs mntr target gets discovered. After discovery, the process monitor target needs to be manually associated through the logical grouping.

---

**Note:** The property file is a name, value pair. The names have to be exactly the same as mentioned in the above examples. The same applies to the format of the values to be passed.

---

## Adding and Registering Targets

To add targets, see [Adding Targets](#).

After the discovery process completes, you must register the targets in Enterprise Manager.

To register PeopleSoft targets:

1. When discovery is finished, examine the displayed list of targets, and deselect any that you do not want to register.

When the discovery process completes, a page displays a list of the discovered PeopleSoft targets that are not yet registered in Enterprise Manager. Any targets previously discovered and registered are excluded from the list. All listed targets are selected by default on the Add PeopleSoft Targets page. Clear any discovered targets that you do not want to register.

---

**Note:** A PS PIA target can be registered without a corresponding PS Web Site target. However, a PS Web Site target cannot be registered without also having a registered PS PIA (parent) target.

---



---

**Note:** To register a PS Process Monitor target, there must be a corresponding PS PIA target.

---

2. Click Next.

All targets selected are registered in Enterprise Manager. Their initial configuration values are collected and loaded into the repository.

The discovery process continues for the Process Monitor setup if there are any PS PIA targets. After clicking Next, it continues for the PS Application Databases.

---

**Note:** Before a PS Process Monitor target can be discovered, you need to configure the PROCESSREQUEST web service for use within Integration Broker and Process Scheduler.

---

See [Adding and Registering PS Process Monitor Targets](#).

3. Specify any required environment variables.

The Add PeopleSoft Application Database page appears showing a list of targets for which environment variables may need to be set.

This step is optional with the PeopleTools 8.50 and later versions of the PeopleSoft AMP. Verify that the user profile is correctly set with the required environment variables.

The list includes all PS Application Server Domains, PS Process Scheduler Domains, and PS Search Server Domains registered in Enterprise Manager in this or a previous discovery.

### Set Environment Variables

Click to configure settings that enable connection to an application database—use this following your selection in the Select column.

### Select

Check box to determine for which targets you want to allow editing of the environment variables.

<b>Name</b>	Name of the PS Application Server Domain, Process Scheduler Domain, or PS Search Server Domain that can have a PS Application Database.  This value displays as a link to the target homepage, which you can select to open in a new window.
<b>Target Type</b>	The type of target being registered.
<b>DB Type</b>	The type of database to which the target is connecting.
<b>Environment Set</b>	Shows a green check mark when environment variables have been set for the database (if required for a specific database type). Shows a red X when environment variables have not been set.  The environment variables referred to in this field are database connectivity parameters and vary depending on the database type.
<b>Databases Discovered</b>	Shows a green check mark when the application database is successfully discovered which means that Enterprise Manager can collect configuration data from the target and collect the PeopleSoft GUID from the application database.  Shows a red X when discovery is unsuccessful. Possible reasons are: <ul style="list-style-type: none"> <li>• The environment variables have not been set correctly. Verify them on the Set Environment Variables page.</li> <li>• The database information is incorrect. Select the target to open it in a new window. Select the Administration tab, then Configure Domain to display configuration data. Validate database information here.</li> <li>• The configuration collection has failed. Select the link for the target in the Name column. The target homepage appears where you can check for metric collection errors displayed above the Incidents section.</li> </ul>
<b>Discover Related Databases</b>	Click this icon to initiate discovery.

4. Click Next.

The green check mark indicates that the application database associated with that target is registered in Enterprise Manager.

---

**Note:** If you need to set environment variables, see the following section.

---

5. When prompted, click OK on the confirmation pages. When finished, click Next.

The processing page for registering the specific application database appears. When complete, the system displays a page reporting the summary of discovery results. Once reviewed, click OK.

6. The PeopleSoft homepage appears showing the newly discovered targets.

---

**Note:** There is a difference between creating a target and adding a target. If you use the create feature, Enterprise Manager creates a *new* domain on the managed host. If you use the add feature (Add PeopleSoft Targets), Enterprise Manager searches for *existing* domains in the managed host that have not been registered in the Enterprise Manager.

---

## Setting Environment Variables

Setting environment variables means specifying basic database connectivity parameters for the database type you are using. When you select Set Environment Variables for any target, the Set Environment Variables page appears showing two columns listing the required environment variables and corresponding values.

---

**Note:** Setting environment variable entries are applicable when the profile is not set for a login shell script.

---

After you have entered the values on the Set Environment Variables page, they are added to the Environment Variables list if they do not already exist. Therefore, based on the database type previously configured, the regions on this page may have tables prepopulated with the required environment variables.

<b>Database Type</b>	<b>Required Environment Variables</b>
Oracle	\$ORACLE_HOME
Informix	\$INFORMIXDIR \$INFORMIXSERVER
Sybase	\$\$SYBASE \$\$SYBASE_OCS
DB2OS390	\$DB2DIR \$DB2INSTANCE
DB2UNIX	\$DB2DIR \$DB2INSTANCE  Get the correct values of DB2DIR and DB2INSTANCE from the command console on the host machine. For example:  <pre>pt-ibm03:\$ ./psconfig.sh pt-ibm03:\$ echo \$DB2DIR /opt/IBM/db2/V9.1 pt-ibm03:\$ echo \$DB2INSTANCE db2udb9</pre>
Microsoft SQL Server	Entry of environment variables is not required. The default values from MSSQLSERVER are inserted.

---

**Note:** The environment variable values are not validated when you enter them. Furthermore, an agent does not inherit the environment variable values of the user initiating an action. For an action to be successful, values for environment variables must be set correctly.

By default, some environment variables appear on the Set Environment Variables page that displays during discovery (see table above), where you can set the values. However, other environment variables, such as LD\_LIBRARY\_PATH, PATH, SHLIB\_PATH, and LIBPATH may also need to be set for each discovered domain.

If you have only one installed PeopleTools and Tuxedo version on a managed host machine, you can set environment variables for an agent prior to starting that agent. However, if you have multiple installed versions of PeopleTools or Tuxedo on a managed host machine, the environment variables must be set for each discovered domain as part of the discovery process.

---

When using a login shell script, the following variables are required to be defined in the \$HOME/.profile (similar to the table above).

- Common environment variables: LD\_LIBRARY\_PATH, PATH, SHLIB\_PATH, LIBPATH
  - Database-specific variables: ORACLE\_HOME, ORACLE\_SID, TNS\_ADMIN, INFORMIXDIR, INFORMIXSERVER, SYBASE, SYBASE\_OCS, DB2DIR, DB2INSTANCE
  - Tuxedo: TUXDIR
- 

**Note:** There are multiple ways to update \$HOME/.profile. The following is only an example.

---

To modify the \$HOME/.profile:

1. Start a new telnet session as the appropriate user ID (posft, emagent, and so on).
2. Select the correct values at the login prompt for database, SQR, COBOL, and so on.
3. Use <set> or <env> commands to retrieve the values of the necessary environment variables.
4. Update \$HOME/.profile with these environment variables, using the VAR=<value>; export VAR syntax.
5. Logout and log into a new telnet session as the same user ID and make sure you see a message indicating that a .profile exists.

For example:

```
WARNING: .profile exists, bypassing /etc/profile
```

The following example illustrates a sample .profile for a PeopleSoft user in a multiuser configuration:

```
ORACLE_HOME=/ds1/home/oracle/Oracle/Database/product/11.2.0/dbhome_1; export ORACLE⇒
_HOME
TNS_ADMIN=/ds1/home/psoft; export TNS_ADMIN
TUXDIR=/ds1/home/psoft/boa/tuxedoPS2/tuxedo11gR1; export TUXDIR
LD_LIBRARY_PATH=$TUXDIR/lib:$ORACLE_HOME/lib:$LD_LIBRARY_PATH; export LD_LIBRARY_PA⇒
TH
SHLIB_PATH=$TUXDIR/lib:$ORACLE_HOME/lib:$SHLIB_PATH; export SHLIB_PATH
LIBPATH=$TUXDIR/lib:$ORACLE_HOME/lib:$LIBPATH; export LIBPATH
PATH=$TUXDIR/bin:$ORACLE_HOME/bin:$PATH; export PATH
```



---

**Note:** If you use the `psemenv.sh` script approach, you can set the same environment variables in the HOME directory or in the PS\_CFG\_HOME directory where you have created the PeopleTools domains. See, [Using the PSEMENV.SH Script for Setting Environment Variables](#).

---

---

## Adding and Registering PS Process Monitor Targets

This section provides an overview and discusses:

- Configuring PROCESSREQUEST Web Service.
- Adding PS Process Monitor Targets From Discovery Results Page.
- Adding PS Process Monitor Targets From the Process Monitor Setup Page.
- PS Process Monitor Configuration Variables.
- Working with custom SSL configurations.

## Understanding PS Process Monitor Discovery

Registering PS Process Monitor targets requires a few additional steps that need to be completed prior to the discovery process. Before you can discover and register a PS Process Monitor target, at least one PS PIA target needs to be discovered, and the PROCESSREQUEST web service must be published through the Integration Gateway.

You discover and register PS Process Monitor targets using:

- Add PeopleSoft Targets: Discovery Results page.
- Process Monitor Setup page.

The following information assumes that you have a working knowledge of PeopleSoft Integration Broker and have it configured in your environment.

See the product documentation for *PeopleTools: Integration Broker*.

## Configuring PROCESSREQUEST Web Service

To configure the PROCESSREQUEST web service:

1. Configure Integration Broker for your environment.

Make sure to specify a *Secure Target Location*.

---

**Note:** The PROCESSREQUEST web service is enabled by default in PeopleTools 8.56 and PeopleSoft Applications built on PT8.56 and higher. Hence PeopleTools 8.56 and higher does not require you to perform the steps from 2 to 7.

---

2. Select PeopleTools, Integration Broker, Integration Setup, Services, enter PROCESSREQUEST, and click Search.
3. Open each service operation and verify that Security Verification is set to one of the following:

- *Encrypt/Digital Sign or SSL*
  - *Encrypt or SSL*
  - *Digital Sign or SSL*
  - *SSL*
4. Select PeopleTools, Integration Broker, Web Services, Provide Web Service open PROCESSREQUEST on the Select Services page, and click Next.
  5. On the Select Service Operations page, select Use Secure Target Location, (to create a secure end point address in WSDL), select these service operations, and then click Next.
    - FindRequests
    - GetParams
    - GetProcessNames
    - GetPrompt
    - GetReport
    - GetRequest
    - GetServerConstraints

---

**Note:** GetServerConstraints service operation is included only for PeopleTools 8.54 version and above.

---

- Schedule
- UpdateRequest

---

**Note:** Version v1 must be set as the default for FindRequest, GetPrompt, and GetRequest service operation. You must include v1 for FindRequest, GetPrompt, and GetRequest service operation in the PROCESSREQUEST web service.

---

6. On the View WSDL page, click View WSDL to verify the generated WSDL, and click Next.
7. On the Specify Publishing page, click Finish, and copy the generated WSDL URL, which you will need when you discover and set up the PS Process Monitor target.
8. Configure the distribution agent.
  - a. Select PeopleTools, Process Scheduler, Report Nodes, select the Add a New Value tab, enter *PRCSMNTRNODE*, and click Add.
  - b. Select Ftp/XCopy.
  - c. Enter the URL as: *http://<host>:port/psreports/<site>*
  - d. Enter Network Path as: *\\<host>\psreports*

- e. Click Save.
9. Configure server definition.
    - a. Select PeopleTools, Process Scheduler, Servers.
    - b. Select the appropriate server (PSNT, PSUNIX, and so on).
    - c. Select the Distribution tab and enter Distribution Node Name as *PRCSMNTRNODE*.
    - d. Select the Transfer System Files to Report Repository check box.
    - e. Click Save.

---

**Note:** The replicate PIA may fail due to redundancy in classpath. For workaround, see [E-PSEM: Oracle Enterprise Manager - Setup Process Monitor for Peoplesoft PIA \(Doc ID 1620052.1\)](#).

---

## Adding PS Process Monitor Targets From Discovery Results Page

During the typical discovery process, you have the option to add and register PS Process Monitor targets. The Add PS Process Monitor page can be launched only if a PS PIA target has been discovered and selected.

---

**Note:** For discovering PS Process Monitor targets, the PeopleTools version for the PS PIA target must be at least PeopleTools 8.50.

---

## Working With Custom SSL Configurations

During PS Process Monitor discovery, the EM Agent communicates with Integration Broker over HTTPS using the default SSL configuration setup.

The following process outlines the typical Process Monitor discovery workflow, which existed in previous releases, and is supported by default in the current release, as well.

### Image: Discover Process Monitor

Discover Process Monitor

The screenshot shows the Oracle Enterprise Manager Cloud Control 13c interface. At the top, it says 'ORACLE Enterprise Manager Cloud Control 13c' and 'SYSMAN'. Below that is a progress bar with six steps: 'Discovery Inputs', 'Host Credentials', 'Discovery Results', 'Discover Process Monitor' (which is the active step), 'Discover Database', and 'Discovery Summary'. Below the progress bar, the page title is 'Add PeopleSoft Targets: Discover Process Monitor'. There are 'Back', 'Step 4 of 6', 'Next', and 'Cancel' buttons. A message says: 'Shown below are PIA targets, for which we can discover Process Monitor targets. Select a PIA target and enter required fields. Select discovery from Actions drop-down menu to attempt the discovery of Process Monitor target. When Process Monitor is discovered, click next to continue.' Below this is a section titled 'Process Monitor Setup' with a table of discovered PIA targets. The table has columns: 'PS PIA Target', 'PROCESSREQUEST WebService URL', 'Generate WSDL URL', 'User ID', 'QEDMO', and 'Password'. One target is listed with the URL 'http://sic11bhp.us.oracle.com'.

1. Discover the PIA target.

2. Use the PIA target in the All PeopleSoft Targets page, to discover the Process Monitor target.
3. In the Process Monitor discovery page, enter the WSDL URL or click the *Generate WSDL URL* button to fetch the WSDL url.
4. Discover the PS Process Monitor target.

This "typical" process:

- uses the default SSL configuration.
- makes no changes to the pskey.properties file.
- keeps the property useCustomSSLConfiguration set to false (the default).

Additionally, the PeopleSoft plug-in supports EM Agent communicating with Integration Broker using a custom SSL configuration. The high-level steps for setting up the custom SSL configuration are:

1. Export the default signer certificate presented by the web server (WebLogic or WebSphere) for HTTPS communication (using the keytool utility).
2. Import this signer certificate into the keystore pskey used by the EM Agent using the keytool utility.
3. In pskey.properties file, enable the following property for the custom configuration setup:  

```
useCustomSSLConfiguration=true
```
4. Restart the EM Agent and discover the Process Monitor target with the custom SSL configuration setup.

When using the custom SSL configuration, you import the signer certificate of the web server (WebLogic or WebSphere) into the agent's custom keystore file which by default is: \$AgentHome/sysman/config/pskey.

---

**Note:** The EM Agent's keystore file (pskey) and properties file (pskey.properties) is required for implementing this feature and can be found in the directory \$AgentHome/sysman/config.

---

## Retrieving Signer Certificate from WebLogic

To retrieve the signer certificate:

1. Verify the signer certificate.
  - a. Go to the PIA signon URL using an HTTPS port.
  - b. Click View Certificates.  
The certificate is displayed.
  - c. Click Export to export the certificate.
  - d. Save the certificate.
2. Export this signer certificate from the WebLogic keystore file, cacerts, using the keytool utility.

For example:

```
$Agent_Home/jdk/bin/keytool -export -rfc -keystore cacerts -alias certgencab
-file certgencab.cer -storepass changeit -keypass changeit
```

---

**Note:** If using a custom SSL configuration on WebLogic, you may need to export the appropriate signer certificate from the keystore, cacerts.

---

3. Import the signer certificate file certgencab.cer into the Agent's custom keystore file, pskey, using the keytool utility.

For example:

```
$Agent_Home/jdk/bin/keytool -import -noprompt -trustcacerts -alias
certgencab -file certgencab.cer -keystore pskey -storepass password
```

4. Edit the pskey.properties file and ensure:
  - custom keystore location and other attributes are properly set.
  - useCustomSSLConfiguration is set to *true*.

## Retrieving Signer Certificate from WebSphere

To retrieve the signer certificate from WebSphere:

1. Extract the signer certificate.

Login to WebSphere administration console, and navigate to Security, SSL certificate and key management, Key stores and certificates, NodeDefaultTrustStore, Signer certificates.

Select the default signer certificate, *root*, and click Extract.

This will extract the certificate into the given location in ASCII text mode by default.

---

**Note:** If you are using a custom SSL configuration on WebSphere, you may have to extract the appropriate signer certificate from the keystore, NodeDefaultTrustStore.

---

2. Import this signer certificate file, rootWAS.cer, into the Agent's custom keystore file, pskey, using the keytool utility.

For example:

```
$Agent_Home/jdk/bin/keytool -import -noprompt -trustcacerts -alias rootWAS
-file rootWAS.cer -keystore pskey -storepass password
```

3. Edit the pskey.properties file to ensure:
  - the custom keystore location and other attributes are properly set.
  - useCustomSSLConfiguration is set to *true*.

## Related Links

[RSA Certificate Issues on WebSphere](#)



## Chapter 4

# Managing PeopleSoft Application Database Targets

## Understanding PeopleSoft Application Database Targets

The PeopleSoft Application Database target type refers to the database that contains the PeopleSoft application. The application database target type is not intended to manage the underlying database (RDBMS) itself. However, depending on your database type, Enterprise Manager may provide additional management and monitoring features.

If the database is Oracle, you can monitor and manage the database by selecting Targets, Database from the Enterprise Manager page.

**Note:** If you have backed up, and then restored a database, you must set the GUID in the database to blank before attempting the discovery process.

To get the current value of the database GUID, execute the following SQL Statement:

```
select GUID from PSOPTIONS
```

Then, depending on your database syntax, execute the appropriate update statement to set the GUID column in PSOPTIONS to ''. For example:

```
update PSOPTIONS set GUID = ''
```

The next time an application server connects to the database, the system generates a new unique GUID for that database.

## Accessing the PeopleSoft Application Database Page

From the All PeopleSoft Targets page, click the application database link.

**Image: PS Application Database Target page**

This example illustrates the fields and controls on the PS Application Database homepage.

Click the PeopleSoft Application Database link to:

- Monitor the PeopleSoft Application Database.  
See [Monitoring](#).
- Control the PeopleSoft Application Database.  
See [Control](#).
- View job activity.  
See [Job Activity](#).
- View information publisher reports.  
See [Information Publisher Reports](#).
- Configure targets.  
See [Configuration](#).
- Validate compliance.  
See [Compliance](#).
- Setup target.  
See [Target Setup](#)
- View target Information.  
See [Common Elements on Targets Homepages](#).



## Chapter 5

# Managing PeopleSoft Application Server Domain Targets

## Understanding PeopleSoft Application Server Domain Targets Homepage


This target type enables an administrator to manage PeopleSoft application server domains.

**Note:** Many of the features and concepts in this section are described in *PeopleTools 8.54: System and Server Administration*.

Select Targets, PeopleSoft and then click the specific application server that you want to view.

**Image:** PS Application Server page

This example illustrates the fields and controls on the PS Application Server homepage.

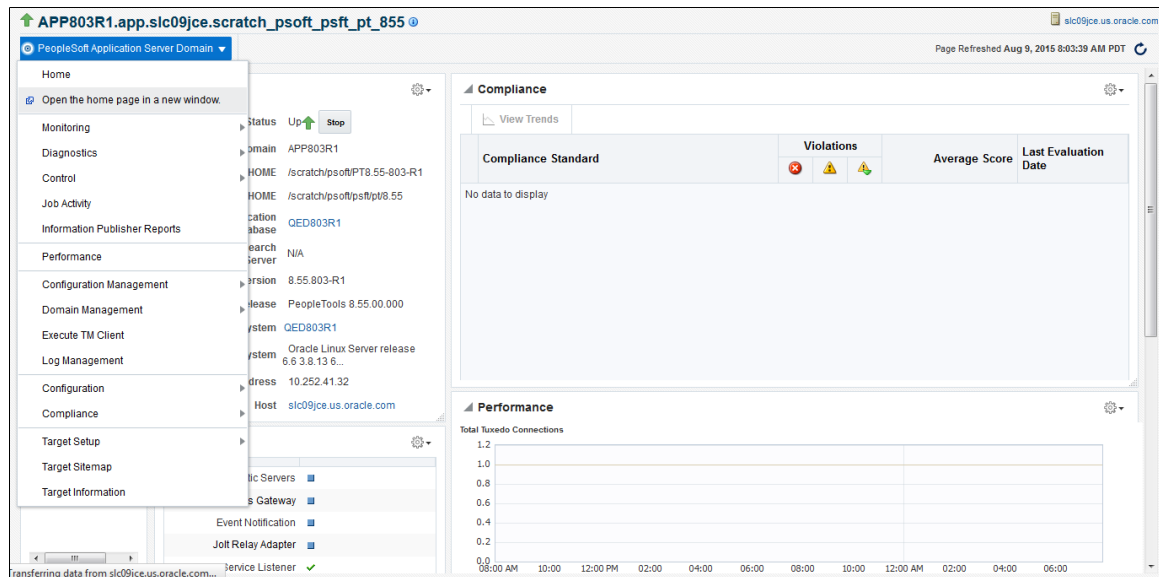

Click the PeopleSoft Application Server Domain link to:

- Monitor the PS Application Server Domain.  
See [Monitoring](#).
- Control the PS Application Server Domain.  
See [Control](#)
- View job activity.

See [Job Activity](#)

- View information publisher reports.

See [Information Publisher Reports](#).

- View performance.

See [Performance](#).

- Manage configuration.

To configure domain, see [Configuration Management](#), “Configure Domain”.

To create like domain, see [Configuration Management](#), “Create Like Domain”.

To copy domain, see [Configuration Management](#), “Copy Configuration”.

To discover database, see [Understanding the Discovery Process](#) and [Creating and Configuring PeopleSoft Application Server Domain Targets](#)

- Manage domain.

See [Domain Management](#).

- Manage logs.

See [Log Management Page](#)

- Configure targets.

See [Configuration](#)

- Validate compliance.

See [Compliance](#)

- Setup target.

See [Target Setup](#)

- View target Information.

See [Common Elements on Targets Homepages](#).

---

## Creating and Configuring PeopleSoft Application Server Domain Targets

This section provides an overview of creating and configuring PeopleSoft targets and describes how to:

- Create PS Application Server domain targets.
- Configure PS Application Server domain targets.

## Creating PeopleSoft Application Server Domain Targets

The Enterprise Manager user must have a super administrator privilege to create new application server domain target. It is important to set the correct environment variables for new domains created within Enterprise Manager. For more information about setting setting environment variables, see [Setting Environment Variables](#).

1. Select Targets, PeopleSoft, Create to access the Create PeopleSoft Application Server Domain page.

### Image: Create PeopleSoft Application Server Domain page

This example illustrates the fields and controls on the Create PS Application Server Domain page. You can find definitions for the fields and controls later on this page.

Enter all the required parameters and then click OK.

#### Domain

Enter a unique name (within the host) not greater than 8 characters and not containing any spaces or punctuation marks.

#### Host

Click the icon to display the Host Target selection window, and select the host where you want to create the domain.

#### PS\_HOME

Based on the host, the available list is limited to the PS\_HOMEs on the host that contain the software necessary to create a domain.

You can discover additional PS\_HOMEs to augment this list. If you click Discover PS\_HOMEs in the Related Links region of this page, the Add PeopleSoft Targets page with the PS\_HOME/PS\_CFG\_HOME check box selected appears. Continue through the discovery process, when finished, control returns to this page.

#### PS\_CFG\_HOME

Specify the location of PS\_CFG\_HOME.

- Existing: To use an existing PS\_CFG\_HOME location, select the value from the drop-down list.
- New: To enter a new location (as opposed to using the existing location) enter that value in the New field.
- Same as PS\_HOME: To install the PS\_CFG\_HOME within the PS\_HOME location, select this check box.

The system automatically populates the New field with the specified PS\_HOME.

### **Configuration Template**

Select a template from the drop-down list.

(Optional) Click Get Latest Configuration Templates in the Related Links region of this page to retrieve the latest template list from the host. You are required to enter your credentials in a subsequent page to connect with a managed host.

The configuration template you select determines the default values of the domain.

There are predefined configuration templates based on the number of concurrent users expected to connect to the domain. The following provides a *general* guideline:

- Small (1-50 users)
- Medium (50-500 users)
- Large (500-1000 users)
- Developer (for a development or test system)

### **Configure Domain**

Default selection is to configure the domain. If selected, the Configure Domain page appears after the domain is created.

### **Import Domain Configuration from file**

Select to enable the entry of the filename and path of the host's configuration file.

Ensure that the source configuration file resides in the host or an error appears during the create process. Use the Find icon to verify the path or to populate this field by selecting the path to the file.

The Browse and Select: File and Directory page opens in a separate browser. Select folders to drill down further until the desired file is found. Select the file and click Select.

If you do not import the configuration from a file, click OK.

The domain will be created without a configuration. You can configure the domain at a later time by selecting the Configure Domain link from the Administration tab of the target.

### **Import IB Master Domain from Configuration File**

For Integration Broker environments, you can implement master-slave configurations with the Integration Broker server domains. Select this option to import previously configured master domain configurations.

See *PeopleTools 8.54: PeopleSoft Integration Broker Administration*

### Filename in Host

Need Info

2. On the Enter Credentials for the host page, select the credentials and then click OK.

For more information about preferred credential and named credential, see <link>

3. Click OK on the Confirmation page.

### Image: Enter Credentials for the host page

This example illustrates the fields and controls on the Enter Credentials for the host page. You can find definitions for the fields and controls later on this page.

### Credential

Specify the credentials. The credential that you select becomes the preferred and monitoring credential for the discovered or newly created targets.

### Preferred Credential Name

Target Preferred Credentials is a credential specifically applied to a single target for a particular user.

See [Managing Target Preferred Credentials](#).

### Credential Details

Specify the user name and password for the target.

### More Details

Click this to view more details about the credential creation.

## Configuring PeopleSoft Application Server Domain Targets

In the PeopleSoft environment, you would use PSADMIN to create and configure your domains. When using the PeopleSoft Application Management plug-in, you use the browser interface of the Enterprise Manager Cloud Control console. The options available in PSADMIN are replicated in the console. For information on each domain parameter, refer to the Oracle PeopleTools documentation.


See *PeopleTools 8.54: System and Server Administration*, “*Setting Application Server Domain Parameters*”

For example, when configuring a domain, you have the option to use the Quick Configuration interface, similar to the PSADMIN option. This appears if you selected Configure Domain on the Create PS

Application Server Domain page, and after clicking OK on the page indicating your domain has been successfully created.

**Image: Quick Configuration page**

This example illustrates the fields and controls on the Quick Configuration page.

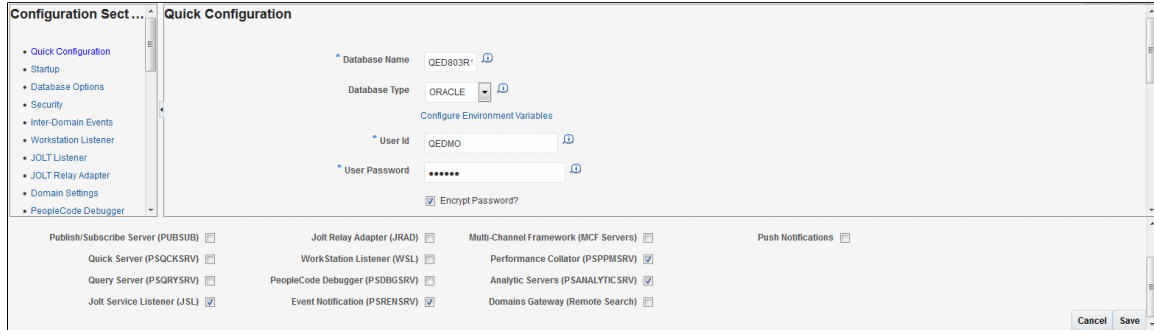

If you need to drill into specific configuration sections, like performing a custom configuration in PSADMIN, click the specific link from the Configuration Sections pane to modify the parameters.

---

**Note:** You cannot edit the password field from the Quick Configuration section.

---

For more information about PSADMIN configuration, refer to the following:

- See the product documentation for *PeopleTools: System and Server Administration*, “Using the PSADMIN Utility,” Understanding PSADMIN
- See the product documentation for *PeopleTools: System and Server Administration*, “Using PSADMIN Menus,” Understanding PSADMIN Menus
- See the product documentation for *PeopleTools: System and Server Administration*, “Working with PSADMUTIL,” Understanding PSADMUTIL

## Chapter 6

# Managing PeopleSoft Process Scheduler Domain Targets


## Understanding the PeopleSoft Process Scheduler Domain page

This target type enables an administrator to manage PeopleSoft process scheduler domains.

Select Targets, PeopleSoft then select the desired PS Process Scheduler Domain target.

**Image: PeopleSoft Process Scheduler Domain page**

This example illustrates the fields and controls on the PS Process Scheduler Domain homepage.

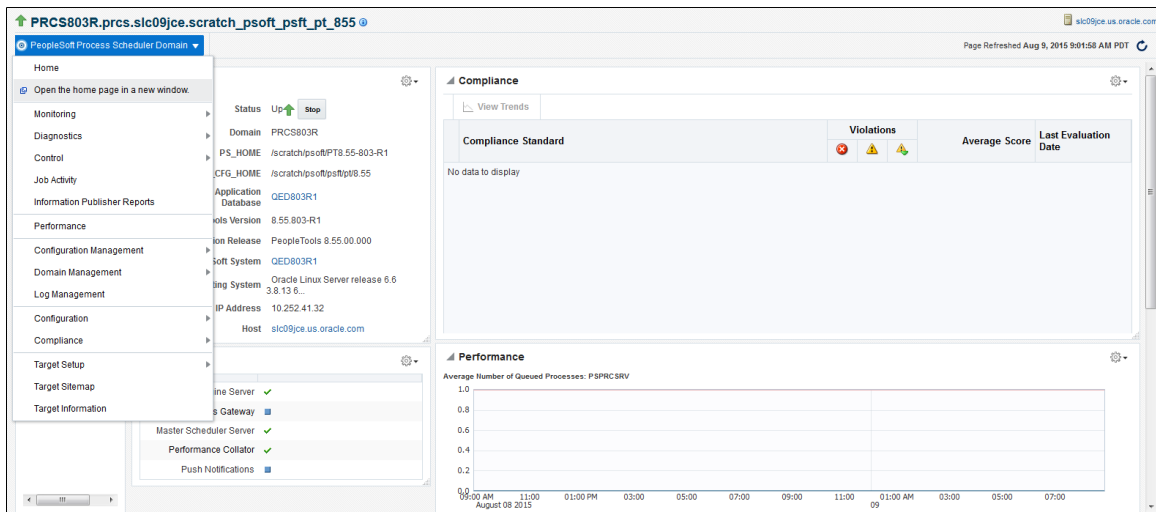

Click the PeopleSoft Process Scheduler Domain link to:

- Monitor the PS Process Scheduler Domain.  
see [Monitoring](#).
- Control the PS ProcessScheduler Domain.  
See [Control](#).
- View job activity.  
See [Job Activity](#).
- View information publisher reports.  
See [Information Publisher Reports](#).
- View performance.

See [Performance](#)

- Manage configuration.

To configure domain, see [Configure Domain](#).

To create like domain, see [Create Like Domain](#).

To copy domain, see [Copy Configuration](#).

To discover database, see [Understanding the Discovery Process](#) and [Creating and Configuring PeopleSoft Application Server Domain Targets](#)

See [Domain Management](#).

- Manage logs.

See [Log Management Page](#).

- Configure targets.

See [Configuration](#).

- Validate compliance.

See [Compliance](#).

- Setup target.

See [Target Setup](#)

- View target Information.

---

## Creating PS Process Scheduler Domain Targets

You create a PS Process Scheduler domain in the same way that you create a PS Application Server domain.

See [Creating PeopleSoft Application Server Domain Targets](#).



# Managing PeopleSoft Search Server Domain Targets

---

## Understanding PeopleSoft Search Server Domain Targets

The PS Search Server Domain target type allows for the application server search function in PeopleSoft applications.

The PS Search Server Domain enables you to:

- Centralize search functions.
- Implement a search server on a platform separate from the application server.
- Run application server domains on operating systems that may not be supported by Verity.

One search server domain can be associated with more than one application server domain, however, an application server domain can have just one search server.

---

**Important!** Search server targets are only those configured within PSADMIN to run with Verity, not those configured for Oracle SES and the PeopleSoft Search Framework.


---

# Accessing PeopleSoft Search Server Domain Targets

Select Targets, PeopleSoft then select a PS Search Server Domain target..

## Image: PeopleSoft Search Server Domain Target page

This example illustrates the fields and controls on the PS Search Server Domain Homepage. You can find definitions for the fields and controls later on this page.

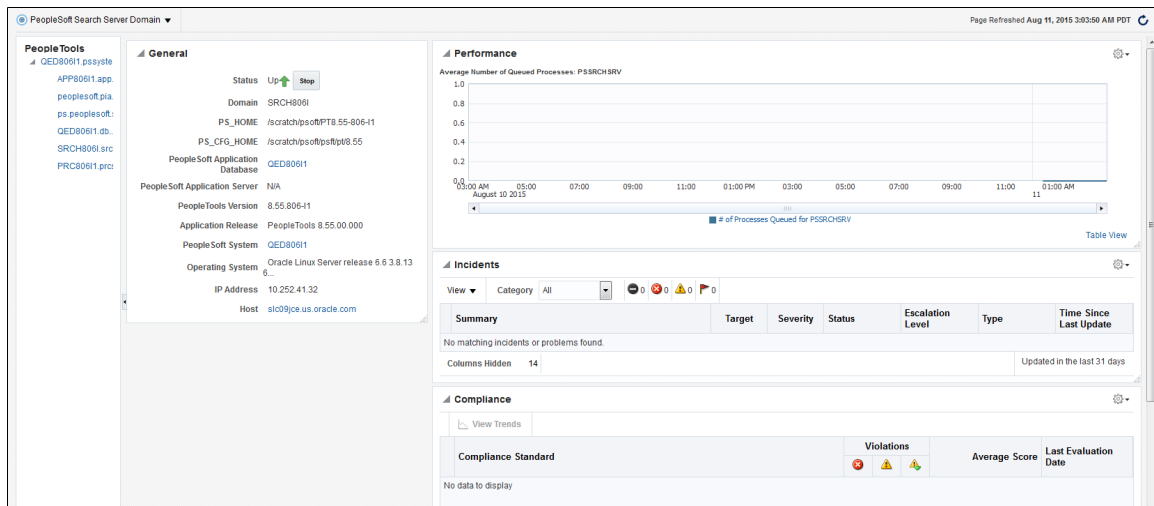

Click the PeopleSoft Process Scheduler Domain link to:

- Monitor the PS Process Scheduler Domain.  
see [Monitoring](#)..
- Control the PS ProcessScheduler Domain.  
See [Control](#).
- View job activity.  
See [Job Activity](#).
- View information publisher reports.  
See [Information Publisher Reports](#).
- View performance.

This page displays the same information as the PS Process Scheduler Domain Performance page except that the process in the Queued Process graph is the PSSRCHSRV.

### See [Performance](#)

- Manage configuration.  
You can do the following:
  - Configure Domain.

- Discover Database.

For more information about configuration management, see [Configuration Management](#).

- Manage domain.

See [Domain Management](#).

- Manage logs.

See [Log Management Page](#).

- Configure targets.

See [Configuration](#).

- Validate compliance.

See [Compliance](#).

- Setup target.

See [Target Setup](#)

- View target Information.

---

## Creating a PS Search Server Domain

Select Targets, PeopleSoft, Create to access the Create PeopleSoft Application Search Server Domain page. The Import Configuration from File option is not available when creating a PeopleSoft Search Server Domain.

---

**Note:** Not all platforms support a separate search server domain. Therefore, the system checks whenever you try to create a search server domain manually. If a separate search server domain target type is not supported on your platform, an error occurs.

---

See [Creating and Configuring PeopleSoft Application Server Domain Targets](#)



## Chapter 8

# Managing PS PIA and PS Web Site Targets

## Understanding PeopleSoft PIA Targets

The PS PIA target acts as a container for one or more PS Web Site targets and together they are a PeopleSoft Web server.


The PS PIA target can be compared to a *domain* in Weblogic and a *server* in WebSphere.

**Note:** Before attempting to discover or access a PS PIA and PS Web Site in Enterprise Manager, verify that your PeopleSoft application is running and that you can log in from a PIA page.

Select Targets, PeopleSoft then select the desired PS PIA target.

### Image: PeopleSoft PIA page

This example illustrates the fields and controls on the PS PIA homepage.

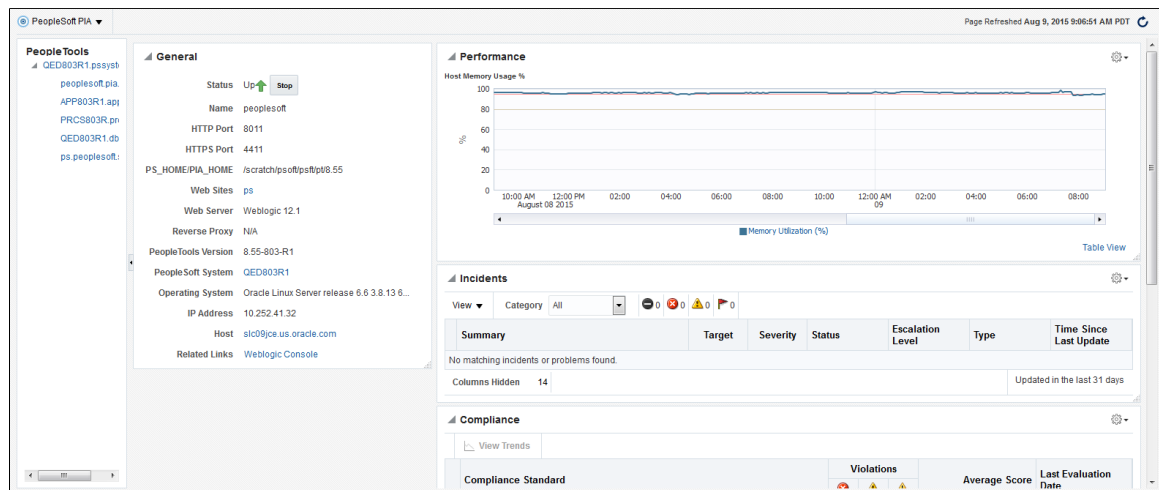

Click the PeopleSoft PIA link to:

- Monitor the PeopleSoft PIA Domain.  
See [Monitoring](#)
- Control the PeopleSoft PIA Domain.  
See [Control](#)
- View job activity.  
See [Job Activity](#)
- View information publisher reports.

See [Information Publisher Reports](#)

- View performance.

See [Performance](#).

- Manage PIA.

See [Managing PIA](#).

- Manage logs.

See [Log Management Page](#)

- Configure targets.

See [Configuration](#)

- Validate compliance.

See [Compliance](#)

- Setup target.

See [Target Setup](#)

- View target Information.

See [Common Elements on Targets Homepages](#)

See the product documentation for *PeopleTools: Portal Technology*, “Configuring the Portal Environment.”

---

## Creating PeopleSoft PIA Domains Target

These instructions assume you have a working knowledge of the topics described in the PeopleTools installation guide and System and Server Administration PeopleBook related to the PeopleSoft Pure Internet Architecture implementation.

See *PeopleTools 8.54 Installation for <your platform>*

See *PeopleTools: System and Server Administration*

To create a PIA domain from Enterprise Manager Cloud Control:

1. Navigate to Targets, PeopleSoft, Create, PS PIA.

- On the Create PS PIA : Input Screen 1 page, enter the required details.

### Image: Create PIA : Input Screen 1 page

This example illustrates the fields and controls on the Create PIA : Input Screen 1 page. You can find definitions for the fields and controls later on this page.

#### Domain

Enter the name of the new PS PIA domain.

#### Host

Select the host server where you intend to install the new PIA domain.

#### PS\_HOME

Select the appropriate PS\_HOME on the selected host.

#### PIA\_HOME

Enter the location where you want to install the PIA domain files (the \webserv directory).

- Existing:* Select from previously installed PIA\_HOMES, with the default displaying the configured PS\_CFG\_HOME location.
- New:* If you intend to install the new PIA domain in a different location, enter that location in the New edit box.
- Same as PS\_HOME:* Select to install the PIA domain within the PS\_HOME directory structure

#### Web Server

Select your web server product: Oracle WebLogic or IBM WebSphere.

#### Install Action


Select the type of domain you want to install, single or multiserver.

See *PeopleTools 8.54 Installation for <your platform>*: "Setting Up the PeopleSoft Pure Internet Architecture"

- On the Create PIA : Input Screen 2 page, enter the required parameters.

**Image: Create PIA : Input Screen 2 page**

This example illustrates the fields and controls on the Create PS PIA (screen 2). You can find definitions for the fields and controls later on this page.

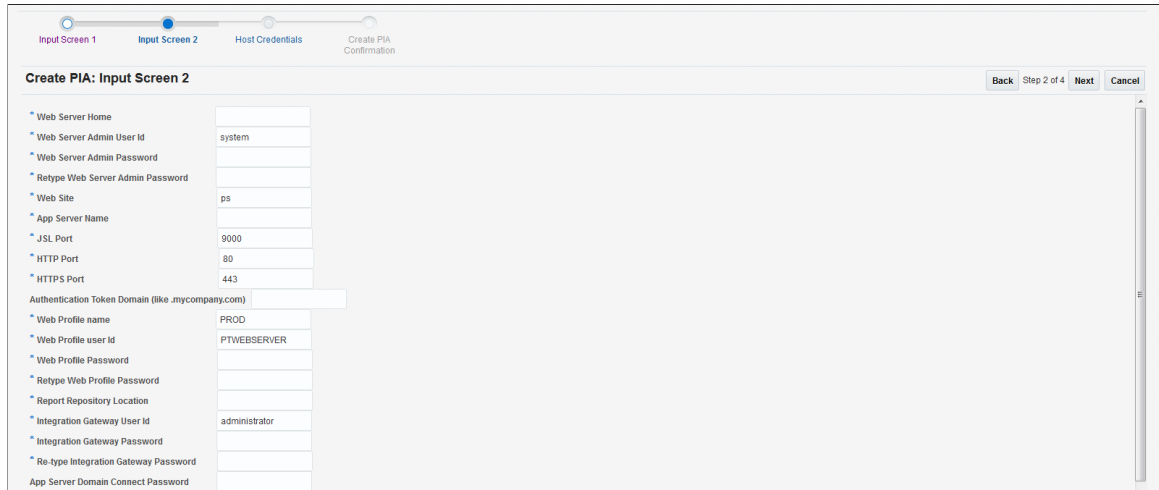

**Web Server Home** The location of your web server product installation.

**Web Server Admin User ID** Enter the user ID used to signon to the web server administration console.

**Web Server Admin User Password** Enter the password used to signon to the web server administration console. (Retype the password to confirm your entry).

**Retype Web Server Admin Password**

**Web Site** Enter the name of the web site included in the domain.

**App Server Name** Enter the host on which the application server domain runs.

**JSL Port** Enter the Jolt listening port for the application server domain.

**HTTP Port** Enter the HTTP port on which the web server listens.

**HTTPS Port** If SSL is configured, enter the HTTPS port on which the web server listens.

**Authentication Token Domain** Enter the authentication token domain, if required.

**Web Profile Name** Enter the name of the web profile to be used.

**Web Profile User ID** Enter the user ID and password associated with the selected web profile. (Retype the password to confirm your entry).

**Web Profile Password** Enter the Web profile password.

**Retype Web Profile Password** Re-enter the Web profile password.



<b>Report Repository Location</b>	The Process Scheduler report output location.
<b>Integration Gateway User Id</b>	Enter the Integration Gateway ID.
<b>Integration Gateway Password</b>	Enter the Integration Gateway password.
<b>Re-type Integration Gateway Password</b>	Re-enter the Integration Gateway password.
<b>App Server Domain Connect Password</b>	Enter the App Server Domain Connect password.
<b>Re-type App Server Domain Connect Password</b>	Re-enter the App Server Domain Connect Password.

4. On the Target Credentials page, enter the credentials required to install a new domain on the selected host.
5. Monitor the PS PIA installation process using the on screen display.
6. When completed successfully, click OK on the PIA Installation Status page.
7. Start the PIA domain, and sign on to test the installation.

## Starting and Stopping Targets Using Jobs

The Oracle Enterprise Manager framework allows the automation and delegation of routine tasks on multiple targets. These tasks are completed using jobs, which you define on the Jobs tab in the Enterprise Manager console. The PeopleSoft AMP provides these predefined jobs to manage selected PeopleSoft targets:

- Start PeopleSoft Domains
- Stop PeopleSoft Domains

Creating start and stop jobs applies to these PeopleSoft targets:

- PS PIA
- PS Application Server Domain
- PS Process Scheduler Domain
- PS Search Server Domain

---

**Note:** Prior to including a target in a job, it must first have been discovered.

---

---

**Note:** If multiple targets are included in the job, they can reside on separate hosts.

---

### Image: Create Job page

This example illustrates the fields and controls on the Create Job page.

The screenshot shows the 'General' subtab of the 'Create Job' page. The job name is 'PS\_APPSRV\_SRART' and the description is 'Starting the PeopleSoft Application Server'. The target type is 'PS Application Server Domain'. Below this, there is a table of targets:

Select	Name	Type	Host	Time Zone
<input type="checkbox"/>	APP803R1.app.slc09jce.scratch_psoft_pst_pt_855	PS Application Server Domain	slc09jce.us.oracle.com	Pacific Daylight Time

At the bottom, there is a 'Maximum Parallel Executions' field with a note: 'Provide a numeric value greater than 0. Default is Null, indicating 'all executions together''. Buttons for 'Cancel', 'Save to Library', and 'Submit' are at the bottom right.

To create a Start/Stop PeopleSoft Domain job:

1. Select Enterprise, Jobs, Activity.
2. On the Job Activity page, select one of the following from the Create Job dropdown:
  - *Start PeopleSoft Domains*
  - *Stop PeopleSoft Domains*
3. On the General subtab:
  - Enter a job name and description.
  - Select the appropriate value from the Target Type dropdown: *PS Application Server Domain*, *PS PIA*, *PS Process Scheduler Domain*, *PS Search Server Domain*.
  - Click Add to display a list of applicable targets, and select the targets you wish to include in the job.
4. Skip the Parameters subtab (it does not apply).
5. On the Credentials subtab, select the credentials for the job to use.
6. On the Schedule subtab, specify whether the job should run immediately, a specific time in the future, or on a repeating schedule.
7. On the Access subtab, modify any required user access to the job.

To see the job result, select Jobs, Job Activity, and click the desired job on the Job Activity page.

---

**Note:** The Start PIA job for PIA domains running on Oracle WebLogic in a Microsoft Windows server environment will not terminate as "Succeeded" due to the limitation with startPIA script not running as a background process on Windows. The job status may be shown as "Running." See the job details output to confirm that the PIA domain has started.

---


For more information about Oracle Enterprise manager, see [Oracle Enterprise Manager Cloud Control Documentation](#)

## Managing PIA

Click PeopleSoft PIA, PIA Management to:

### Image: PeopleSoft PIA - PIA Management menu

This example illustrates the elements in the PIA Management menu.

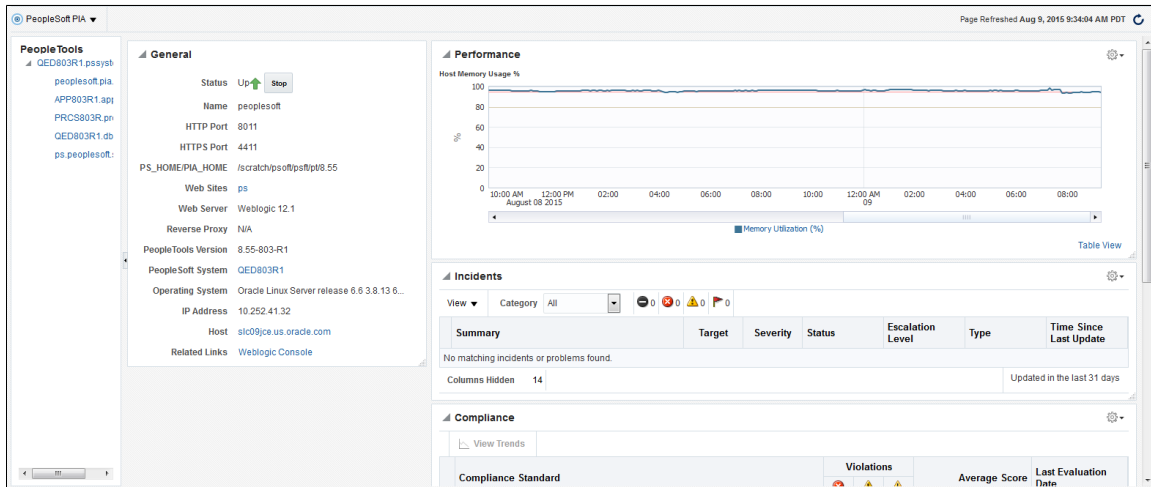

### Redeploy PIA

See [Redeploy PIA Page](#).

### Recreate WebLogic Server Domain and Redeploy PIA

See [Recreate WebLogic Server Domain and Redeploy PIA Page](#).

### Install Additional PeopleSoft Site

See [Install Additional PeopleSoft Site Page](#).

### Replicate PIA

See [Replicate PIA](#).

### Start PIA

Click this to start PIA. Click OK on the confirmation page.

### Stop PIA

Click this to stop PIA. Click OK on the confirmation page.

### Setup Process Monitor

See [Setup Process Monitor](#).

## Redeploy PIA Page

This selection affects all of the PeopleSoft Pure Internet Architecture web applications installed to the local domain. Select this option to redeploy all of the class files and jar files that comprise web components of PeopleSoft Pure Internet Architecture. Server configuration files, scripts and any existing PeopleSoft (PORTAL) sites are not overwritten, unless you specify an existing PeopleSoft site during this setup.

1. Select PeopleSoft PIA, PIA Management, Redeploy PIA to access the Redeploy PIA : Input Screen 1 page.

- Click Next to access the Redeploy PIA : Input Screen 2 page.

**Image: Redeploy PIA : Input Form(Contd.) page**

This example illustrates the fields and controls on the Redeploy PS PIA (Screen 2).



Notice that some of the fields are populated with existing values and cannot be edited. Enter the fields marked \*.

**Web Server Admin Password**

Enter the password used to signon to the web server administration console.

**App Server Name**

Enter the host on which the application server domain runs.

**Authentication Token Domain (like.mycompany.com)**

Enter the authentication token domain.

**Web Profile Password**

Enter the Web profile password.

**Retype Web Profile Password**

Re-enter the Web profile password.

**Report Repository Location**

The Process Scheduler report output location.

**Integration Gateway Password**

Enter the Integration Gateway password.

**Retype Integration Gateway Password**

Re-enter the Integration Gateway password.

**App Server Domain Connect Password**

Enter the App Server Domain Connect password.

**Re-type App Server Domain Connect Password**

Re-enter the App Server Domain Connect password.

- On the Redeploy PIA : Credential Screen, select the credentials and then click Next.
- Click OK on the Redeploy PIA : Confirmation Screen.

See the product documentation for *PeopleTools Installation* for your database platform, "Setting Up the PeopleSoft Pure Internet Architecture"

## Recreate WebLogic Server Domain and Redeploy PIA Page

This option applies only to Oracle WebLogic Server configuration and all of the PeopleSoft Pure Internet Architecture web applications installed to the local Oracle WebLogic domain. Select this option to completely remove an existing Oracle WebLogic domain and create the newly specified PeopleSoft site.

---

**Note:** Stop the PS PIA target before initiating PIA install action.

---

1. Select PeopleSoft PIA, PIA Management, Recreate WebLogic Server Domain and Redeploy PIA to access the Recreate WebLogic Server Domain and Redeploy PIA : Input Screen 1 page.
2. Select the Install Action to specify the type of domain you want to install, single or multiserver.  
See PeopleTools 8.54 Installation for <your platform>: "Setting Up the PeopleSoft Pure Internet Architecture"
3. Click Next to access the Recreate WebLogic Server Domain and Redeploy PIA : Input Screen 2 page.

### Image: Recreate Weblogic Server Domain and Redeploy PIA : Input Form(Contd.)

This example illustrates the fields and controls on the Recreate WebLogic Server Domain and Redeploy PIA : Input Screen 2 page. You can find definitions for the fields and controls later on this page.

Some of the fields are populated with values. Enter the fields marked \*.

<b>App Server Name</b>	Enter the host on which the application server domain runs.
<b>Authentication Token Domain (like.mycompany.com)</b>	Enter the authentication token domain.
<b>Web Profile Password</b>	Enter the Web profile password.
<b>Retype Web Profile Password</b>	Re-enter the Web profile password.
<b>Report Repository Location</b>	The Process Scheduler report output location.
<b>Integration Gateway Password</b>	Enter the Integration Gateway password.
<b>Retype Integration Gateway Password</b>	Re-enter the Integration Gateway password.

**App Server Domain Connect Password**

Enter the App Server Domain Connect password.

**Re-type App Server Domain Connect Password**

Re-enter the App Server Domain Connect password.

4. On the Recreate WebLogic Server Domain and Redeploy PIA : Credential Screen, select the credentials and then click Next.
5. Click OK on the Recreate WebLogic Server Domain and Redeploy PIA : Confirmation Screen.

**Install Additional PeopleSoft Site Page**

This option is relevant only to the PeopleSoft Portal web application, and does not modify or revert any other configuration settings. Select this option to install only the necessary files for defining an additional PeopleSoft site onto an existing web server configuration. The new site will be accessed using its name in the URL. For example, a site named "CRM" would be accessed using a URL similar to:

*http://mywebserver\_machine/CRM*

To reset or re-create an existing PeopleSoft site, enter that site's name as the site to create.

1. Select PeopleSoft PIA, PIA Management, Install Additional PeopleSoft Site to access the Install Additional PeopleSoft Site : Input Screen 1 page.

---


**Note:** All the fields are populated with values from the selected PIA target.

---

2. Click Next to access the Install Additional PeopleSoft Site : Input Screen 2 page.

**Image: Install Additional PeopleSoft Site : Input Screen 2 page**

This example illustrates the fields and controls on the Install Additional PeopleSoft Site : Input Screen 2. You can find definitions for the fields and controls later on this page.

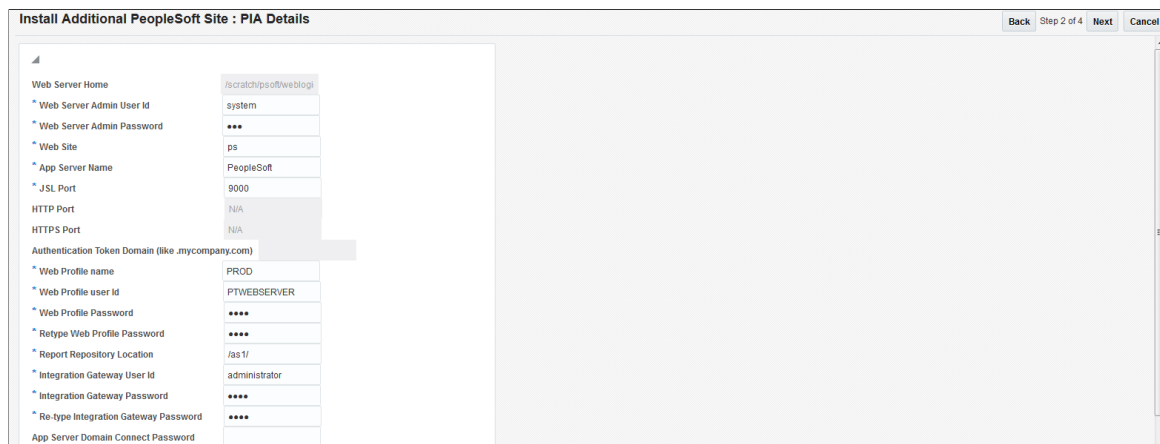

Some of the fields are populated with values. Enter the fields marked \*.

**App Server Name**

Enter the host on which the application server domain runs.

**Web Profile Password**

Enter the Web profile password.

<b>Retype Web Profile Password</b>	Re-enter the Web profile password.
<b>Report Repository Location</b>	The Process Scheduler report output location.
<b>Integration Gateway Password</b>	Enter the Integration Gateway password.
<b>Retype Integration Gateway Password</b>	Re-enter the Integration Gateway password.

3. On the Install Additional PeopleSoft Site : Credential Screen, select the credentials and then click Next.

For more information about preferred credential and named credential, see <link>

4. Click OK on the Install Additional PeopleSoft Site : Confirmation Screen.

See the product documentation for *PeopleTools Installation* for your database platform, "Setting Up the PeopleSoft Pure Internet Architecture"

## Replicate PIA

You can clone the WebServer domains. Replicate PIA creates a destination domain as a replica of source domain.

1. Select PeopleSoft PIA, PIA Management, Replicate PIA to access the Replicate PIA : Input Screen page.

### Image: Replicate PIA : Input Screen page

This example illustrates the fields and controls on the Replicate PIA : Input Screen page. You can find definitions for the fields and controls later on this page.

<b>Target Domain Name</b>	Enter the name of the new PS PIA domain.
<b>Host</b>	Select the host server where you intend to install the new PIA domain.
<b>Web Server Home</b>	Specify the location of your web server product installation.
<b>Web Server Admin User Id</b>	Enter the user ID used to signon to the web server administration console.
<b>Web Server Admin Password</b>	Enter the password used to signon to the web server administration console.

**Report Repository Location** Specify the Process Scheduler report output location.

2. Click Next.
3. On the Replicate PIA : Credential Screen, select the credentials and then click Next.

For more information about preferred credential and named credential, see <link>

4. Click OK on the Replicate PIA : Confirmation Screen.

The destination domain will be created with the same properties and websites as that of the source domain. Edit the configuration of the destination domain to change the http port to proceed with starting and accessing the PIA URL.


## Setup Process Monitor

If you did not add the PS Process Monitor target during the typical discovery process, you can use the Process Monitor Setup page.

Select PeopleSoft PIA, PIA Management, Setup Process Monitor to access the Process Monitor Setup page.

### Image: Process Monitor Setup page

This example illustrates the fields and controls on the Process Monitor Setup page.



#### PS PIA Target

Select the appropriate PIA installation.

#### PROCESSREQUEST WebService URL

The Process Monitor target accesses the PeopleSoft system using a WSDL service managed by Integration Broker. Specify the URL for the WSDL file using the following syntax:

```
http://<host>:<port>/PSIGW/
PeopleSoftServiceListeningConnector/<wsdl file name>
```

For example:

```
http://pta123.bigcompany.com:10180/PSIGW/
PeopleSoftServiceListeningConnector/PROCESSREQUEST.1.
wsdl
```

#### User ID/Password

Enter the PeopleSoft user ID and password that the Process Monitor will use to access the PeopleSoft system.

---

## Accessing the PeopleSoft Web Site Targets

PS Web Site targets comprise the second part of a PeopleSoft web server. This level contains all of the PS PIA settings and files; hence, a PS Web Site target requires a tandem PS PIA target in order to be




activated. There can be one or multiple sites attached to a PS PIA target. The PS Web Site's key role is configuration.

The PS Web Site homepage shows basic information for a web site. Select Targets, PeopleSoft and select the desired PS Web Site target. The PS Web Site homepage appears.

### Image: PeopleSoft Website page

This example illustrates the fields and controls on the PS Web Site Homepage.

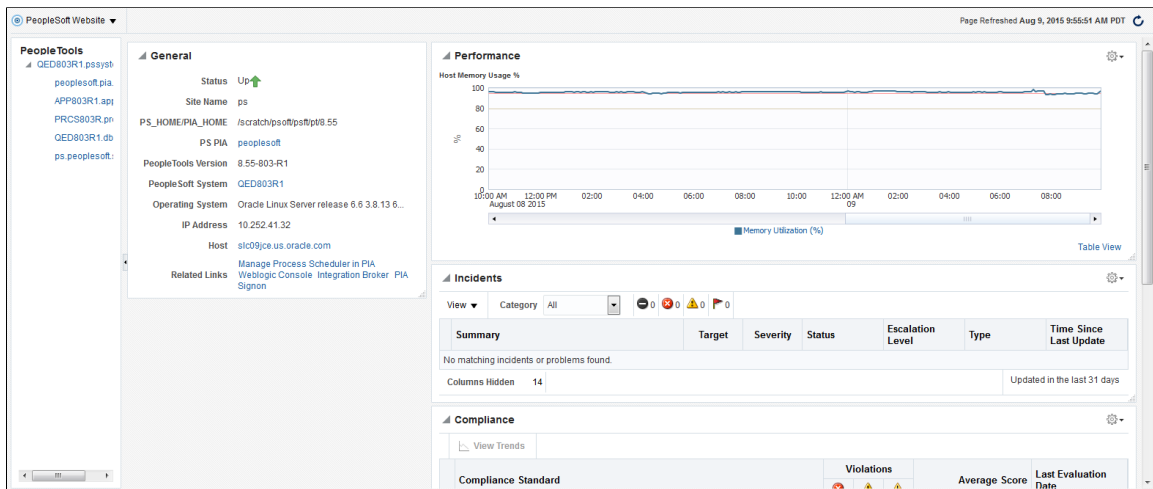

Click the PeopleSoft Website link to:

- Monitor the PeopleSoft Website.  
See [Monitoring](#)
- Control the PeopleSoft Website.  
See [Control](#)
- View job activity.  
See [Job Activity](#)
- View information publisher reports.  
See [Information Publisher Reports](#)
- View performance.  
See [Performance](#)
- Manage Configuration  
Configure Domain  
See [Configuration Management](#)
- Configure targets.  
See [Configuration](#)

- Validate compliance.

See [Compliance](#)

- Setup target.

See [Target Setup](#)

- View target Information.

See [Common Elements on Targets Homepages](#)

## Chapter 9

# Managing PeopleSoft Process Monitor Targets


## Accessing the PeopleSoft Process Monitor page

The PS Process Monitor homepage enables you to view and access PS Process Monitor information.

Select Targets, PeopleSoft then select the desired PS Process Monitor target.

**Image: PeopleSoft Process Monitor page**

This example illustrates the fields and controls on the PS Process Monitor homepage.

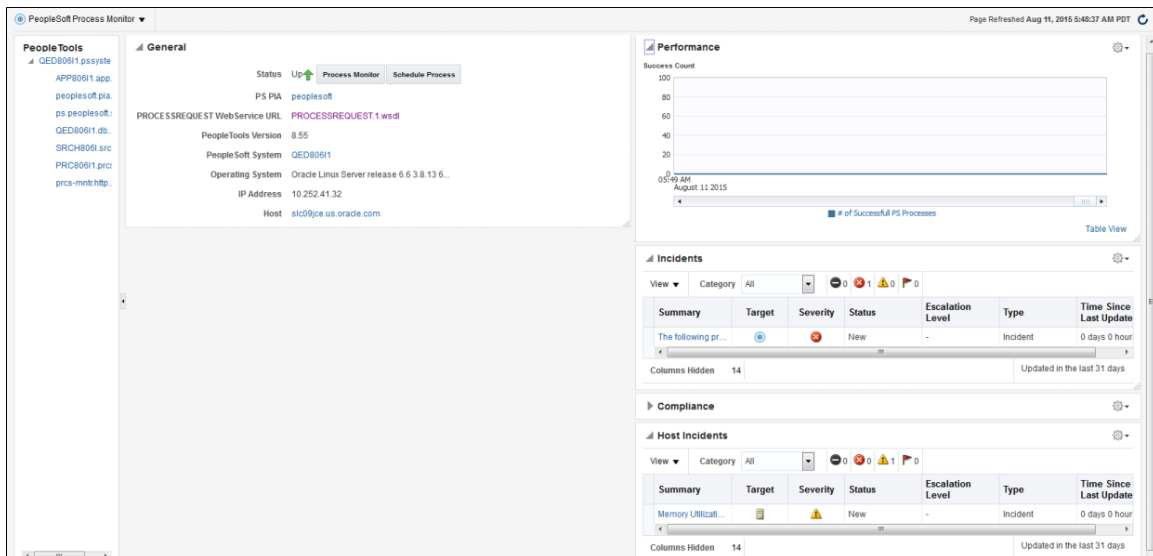

Click the PeopleSoft Process Monitor link to:

- Monitor the PeopleSoft Process Monitor.  
See [Monitoring](#)
- Control the PeopleSoft Process Monitor.  
See [Control](#)
- View job activity.  
See [Job Activity](#).
- View information publisher reports.  
See [Running the Process Monitor Metrics Report](#).

- View performance.  
For more information about viewing performance, see [Viewing PeopleSoft Process Monitor Performance](#).
- Administer PeopleSoft Process Monitor.  
See [Administering PeopleSoft Process Monitor](#)
- Configure targets.  
For more information about configuring targets, see [Configuration](#).
- Validate compliance.  
For more information about validating compliance, see [Compliance](#).
- Setup target.  
See [Target Setup](#).
- View target Information.  
For more information about viewing target information, see [Common Elements on Targets Homepages](#).

## Viewing PeopleSoft Process Monitor Performance

Select Performance to monitor PS Process Monitor performance. The PS Process Monitor performance page shows these metrics to help you monitor the status of submitted process requests:

<b>Metric</b>	<b>Description</b>
Success Count	The number of processes completed successfully in the last hour.
Fail Count	The number of processes failed in the last hour. These have a Run Status of "Error" or "No Success."
Run Count	The total number of processes run in the last hour.
Stuck Count	The number processes which have been the Run Status of "Processing" and meets the one of the criteria in the section below.
Not Posted Count	The number of processes with the Distribution Status "Not posted."
Posting For > 15 Minutes Count	The number of processes which have been in the Distribution Status of "Posting" for more than 15 minutes.
Pending Count	The number of processes which have the Run Status of "Queued" and have a Run Date and Time more than 30 minutes old.

<b>Metric</b>	<b>Description</b>
Initiated But Pending Count	The number of processes which have the Run Status of "Initiated" and have a Run Date and Time more than 30 minutes old.
Unallocated Count	The number of processes which have the Run Status of "Queued" and have a Run Date and Time more than 30 minutes old and have not been assigned to any server yet.

### Stuck Count Criteria

The system retrieves the last 10 succeeded processes that have the same process type.

<b>Last Process Duration</b>	<b>Current Process Run duration</b>	<b>Tolerance After which to Generate Alert</b>
For processes which are 1 minute or less.	X + 5 minutes	Wait for 5 more minutes before generating the alert.
For processes which are more than 1 minute but less than 60 minutes.	X + 15 min	Wait for 15 more minutes before generating the alert.
For processes which are more than 60 minutes but less than 120 minutes.	X + 20% of previous run time	Wait for 20% more minutes before generating the alert.
For processes which are more than 120 minutes	X + 10% of previous run time	Wait for 10% more minutes before generating the alert.

If there is no similar successful process found, the system generates an alert if it's in "Processing" for more than 30 minutes.

---

## Administering PeopleSoft Process Monitor

This section describes how to administer PeopleSoft Process Monitor:

---

**Note:** This documentation assumes you have a working knowledge of scheduling processes to run within PeopleSoft systems.

---

The Additional Utility link appearing on this page is Execute Host Command.

See [Common Elements on Targets Homepages](#).

### Scheduling Process Monitor


PeopleSoft Application management Plug—in for Oracle Enterprise Manager enables you to submit process requests to be run on the Process Scheduler server, just as you would from the PIA interface. The same fields and controls you use to submit process requests in PIA are available in the Oracle Enterprise Manager interface.

To submit a process request from Oracle Enterprise Manager:

1. Select PeopleSoft Process Monitor, Administration, Schedule Process.

**Image: Schedule Process page**

This example illustrates the fields and controls on the Schedule Process page.

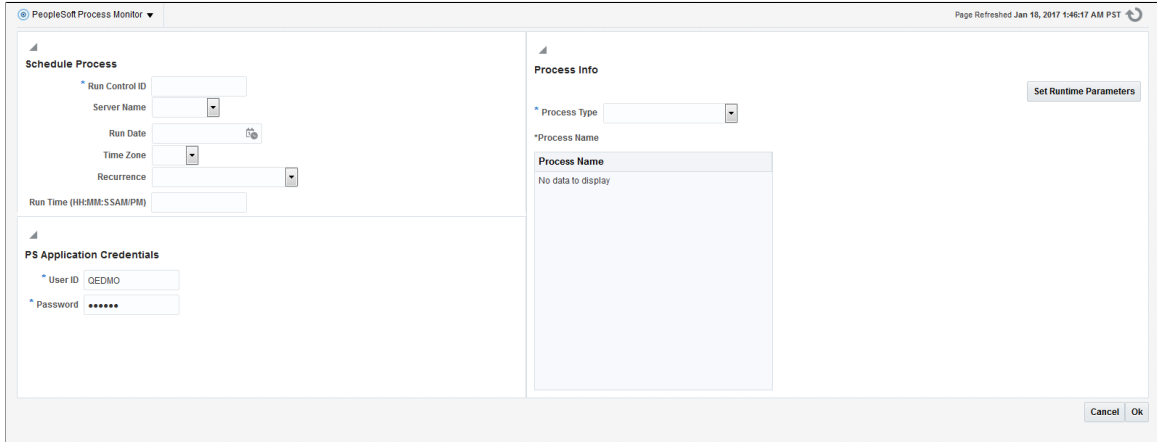

2. On the Schedule Process page, select all applicable values in the Schedule Info section, such as Run Control ID, Server Name, and so on.
3. In the Process Info section, select the process to run and any necessary runtime parameters.
  - a. Click the lookup prompt (flashlight) to open the Select Process Type and Process Name page, where you select the Process Type, click Go, and select the desired Process Name from the search results.
  - b. To set any runtime parameters, click the Set Runtime Parameter button.
4. In the PS Application Credentials section, enter the PeopleSoft user ID and password required to submit the process.

---

**Note:** The default credentials will be those provided during the discovery and setup process.

---

For more information,

See the product documentation for *PeopleTools: Process Scheduler*, “Submitting and Scheduling Process Requests”

See the product documentation for *PeopleTools: Process Scheduler*, “Defining PeopleSoft Process Scheduler Support Information,” Defining Process Definitions

## Monitoring Process Monitor

PeopleSoft Application management Plug—in for Oracle Enterprise Manager enables you to monitor processes that have been submitted to run on the Process Scheduler server by displaying the Process List

and Process Details interfaces. The same fields and controls you use to monitor process requests in PIA are available in the Oracle Enterprise Manager interface.

### Image: Process Monitor page

This example illustrates the fields and controls on the Process Monitor page.

The screenshot shows the 'Process Monitor' page with the following sections:

- Search Info:** Includes dropdowns for 'Process Type' (Application Engine), 'Process Name', 'Server Name', and 'Run Status'. It also has input fields for 'Process Instance' (From, To), 'Last' (1), 'Days', and 'Distribution Status'.
- PS Application Credentials:** Includes input fields for 'User ID' (QEDMO) and 'Password' (masked).
- Table:** A table with columns: Instance, Process Type, Process Name, User, Run Date, Run Status, and Distribution Status. It lists four instances (20454, 20455, 20456, 20457) with their respective details.

Instance	Process Type	Process Name	User	Run Date	Run Status	Distribution Status
20454	Application Engine	PRCSYSPURGE	QEDMO	2015-08-11-01.00.08.000000	Success	Posting
20455	Application Engine	PSXPARCHATTR	QEDMO	2015-08-11-01.00.28.000000	Success	Posting
20456	Application Engine	PSXP_DIRCLN	QEDMO	2015-08-11-01.00.29.000000	Success	Posting
20457	Application Engine	PTSF_GENFEED	QEDMO	2015-08-11-01.00.29.000000	No Success	Posting

To monitor processes from Oracle Enterprise Manager:

1. Select PeopleSoft Process Monitor, Administration, Process Monitor.
2. On the Process Monitor page, in the Search Info section, enter the criteria for the processes you want to monitor, refining the search as needed.
3. In the PS Application Credentials section, enter the PeopleSoft user ID and password required to access the process list.

---

**Note:** The default credentials will be those provided during the discovery and setup process.

---

4. Click Search.
5. View the processes in the Search Results list.

To view the process details:

1. Locate an individual process in the process list.
2. Click the link in the Instance column.
3. Review process details.
4. (If needed) In the Update Process section, select any applicable options.

5. Click OK.

**Image: Process Detail page**

This example illustrates the fields and controls on the Process Detail page.



See the product documentation for *PeopleTools: Process Scheduler*, “Monitoring Process Request”.

## Running the Process Monitor Metrics Report

You can generate a report that displays a comprehensive view of the Process Monitor predefined metrics.

To generate an All Metrics report:

1. In the Enterprise Manager console and from the Enterprise menu item, select the Reports, Information Publisher Reports.
2. On the Report Definitions page, click the PeopleSoft Process Monitor - Report for All Metrics report.  
You can scroll down the reports list, or you can enter *PeopleSoft* in the Title search field and click Go.
3. On the Specify Target for Report page, select the Process Monitor target for which to run the report, and click Continue.

Click the search icon for the PS Process Monitor field and select the appropriate target.

**Image: PeopleSoft Process Monitor - Report for All Metrics page**

This example illustrates the fields and controls on the Sample PS Process Monitor All Metrics report.





# Managing PeopleSoft Systems and Services

---

## Understanding PeopleSoft Systems

PeopleSoft targets sharing the same application database can be grouped into a PeopleSoft system. A PeopleSoft system can comprise an application database, multiple PS PIA targets, PS Web Sites, PS Process Scheduler Domains, PS Process Monitor, PS Search Server Domains, and PS Application Server Domains. For example, a typical PeopleSoft system might be a production HCM application, which could include various PeopleSoft entities—like an application server, web server, search server, Process Scheduler, Process Monitor, and an application database. The PeopleSoft application database is the common target that binds the other PeopleSoft targets together in the PeopleSoft system.

---

**Note:** If you use automated system creation, all PeopleSoft targets that are associated with a particular PeopleSoft application database are added to this system. Only PeopleSoft targets that have been registered in Enterprise Manager can be in a system.

PS PIA and PS Web Site targets do not appear in an automatically generated system, unless they have been logged into previously.

---

## Understanding Services

A *service* is defined as an entity that provides a useful function to its users; specifically, it models a business process or application. An administrator defines a *service test* to determine whether or not the service is available and performing. A *beacon* is a target type in Enterprise Manager that performs a service test.

The PeopleSoft Application Management Plug—in delivers a service test that enables administrators to monitor the availability of a PeopleSoft application by simulating a login-logout activity.

---

**Note:** The delivered service test checks only the login and logout capability of the PeopleSoft application by simulating it (using the URL entered by the user). However, administrators can create their own services in Enterprise Manager to track specific areas of their applications, such as in payroll processing or call center services. They can also modify the generated service.

---

## Creating PeopleSoft Systems

The section discusses:

- The PeopleSoft System homepage.
- Automated PeopleSoft system creation.

## Accessing the PeopleSoft System page

1. Select Targets, Systems.
2. From the Systems page, select a PeopleSoft system.

### Image: PeopleSoft System page

This example illustrates the fields and controls on the PeopleSoft System Homepage.

The screenshot shows the PeopleSoft System homepage with the following sections:

- General:** Owner: SYSMAN, Privilege Propagation: Disabled.
- Status:** Availability: 100% Till August 11, 2015 4:28:00 AM PDT, 7 Members.
- Overview of Incidents and Problems:**
  - Incidents: Updated in the last 24 hours: 4, Updated in last 7 days: 4.
  - Breakdown of incidents updated in the last 7 days:
 

Category	Count
Availability	-
Performance	-
Security	-
Others	4
  - Problems: Total Open: 0.
- Jobs Activity:** Summary of jobs whose start date is within the last 7 days. Includes filters for Show, Latest Run, Search, and Job Name.
- Blackouts:** Section for viewing system blackouts.
- Configuration Changes:** Section for viewing system configuration changes.
- Most Affected Members (Last 24 Hours):**

Name	Type	Key Member	Status	Availability (%)
peoplesoft.pia.slc09jce.scratch_psoft_pt_855	...		...	100
SRCH8061.srch.slc09jce.scratch_psoft_pt_855	...		...	100
APP8061.app.slc09jce.scratch_psoft_pt_855	...		...	100
ps.peoplesoft.site.slc09jce.scratch_psoft_pt_855	...		...	100
QED8061.db.382a820a-3f31-11e5-a720-95617244007	...		...	100
prcs-mmr:http.slc04jtt.8014.PROCESSREQUEST_1_wsd	...		...	100
PRC8061.nrca.slc09jce.scratch_psoft_pt_855	...		...	100
- Compliance Summary:** Compliance Standards, Members, View Trends, Compliance Standard, Average Score.
- Dependent Targets:** Section for viewing dependent targets.
- Services:** Section for viewing services.

## Automated PeopleSoft System Creation

To create a PeopleSoft system:

1. Select Targets, Systems.
2. Click the Add, PeopleSoft System to access the Create PeopleSoft System page.

### Image: Create PeopleSoft System page

This example illustrates the fields and controls on the Create PeopleSoft System page. You can find definitions for the fields and controls later on this page.

The screenshot shows the 'Create Peoplesoft System' page with the following sections:

- Automated Peoplesoft System Creation:**
  - PS App DB: QED8061.db.382a820a-3f31-11e5-a720-95617244007
  - Select the database that will be associated to the new system.
  - System Name: QED8061.PSSystem
  - Time Zone: (UTC-05:00) New York - Eastern Time (ET)
- Service Configuration:**
  - Create Service:
  - Name of Service: QED8061.PSSystem
  - Beacon: EM Management Bea:
  - Choose an existing beacon to associate with the service.
  - Time Zone: (UTC-05:00) New York - Eastern Time (ET)
  - Enter a User ID and password that can login to the peoplesoft application. The User ID and pwd will be used to test availability of your peoplesoft system.
- PS Web Site:**

PS Web Site	PeopleSoft Homepage URL	User ID	Password	Delete
ps.peoplesoft.site.slc09jce.scratch_psoft_pt_855	http://slc09jce.us.oracle.com:8010/pspp/ps/EMPLOYEE/ICE_LOCAL/ln?tab=DEFAULT	QEDMO	*****	<input type="button" value="Delete"/>

## Automated PeopleSoft System Creation

### PS App DB

Select the PeopleSoft database that should be associated to the new system. The list includes all the PS Application Databases that have been registered in Enterprise Manager.

### System Name

Enter a new system name. Enterprise Manager automatically assigns a system name as *<DBName>+[01-99].PSSystem*. If there is already a system with that name, the new name increases incrementally by 1. You can change the system name to one that is more descriptive.

### Timezone

Select the appropriate time zone. The default is the time zone of the Oracle Management Service.

## Service Configuration

### Create Service

(Optional) Select to configure the service that the PeopleSoft Application Management plug—in automatically creates for every valid PeopleSoft system. This service simulates the login-logout action to the PeopleSoft application.

If you leave the check box cleared, the remaining fields are unavailable for selection.

### Service Name

Enter a service name. The default is *<System Name>+. Service*.

### Beacon

Click the icon to open a browser listing predefined beacons. Select the beacon you want associated with the service.

### Timezone

Select the appropriate time zone for the service. The default is the time zone of the Oracle Management Service.

### PS Web Sites and User IDs

Lists the PS Web Sites detected in the PeopleSoft system. You must define the URL for the PeopleSoft page of each PS Web Site and specify login credentials.

1. Enter the PeopleSoft application homepage URL (the first page to appear after the PeopleSoft login page). The format is:

```
<protocol>://<hostname>/ps/<web site>/<portal>/<node>/h/<tab ID>
```

For example:

```
http://myserver.peoplesoft.com/ps/ps/EMPLOYEE/PT_LOCAL/h/?tab=DEFAULT
```

2. Enter a user ID and password for use as the login to these URLs.
3. To remove a web site from the service, click Delete at the end of the row.

---

**Note:** A service can be created only if there is at least one URL and one PS Web Site listed in the Cloud.

---

Click OK to proceed with the automated system creation.

---

**Note:** All system properties are defaulted when the system is created automatically. There are no defaults for charts and metric data and they must be set up manually, if desired.

---

---

## Removing PeopleSoft Systems

Removing a PeopleSoft system means you are removing a grouping of targets in Enterprise Manager. However, you are not removing the targets from the Enterprise Manager or their installations from the server. The member targets remain in Enterprise Manager and can be managed and used for building other systems.

To remove a PeopleSoft system:

1. Select Targets, Systems.
2. Select the existing system that you want to remove.
3. Click Remove.

---

## Managing PeopleSoft Systems

This section discusses:

- PeopleSoft system members
- PeopleSoft system URL
- PeopleSoft system topology

### PeopleSoft System Members


The PeopleSoft System Members page lists all of the PeopleSoft targets included in the system. You can click an individual target to display that target's homepage.

1. Select Targets, Systems.

2. Select PeopleSoft System, Members, > Show All

**Image: PeopleSoft System Members page**

This example illustrates the fields and controls on the PeopleSoft System Members page.

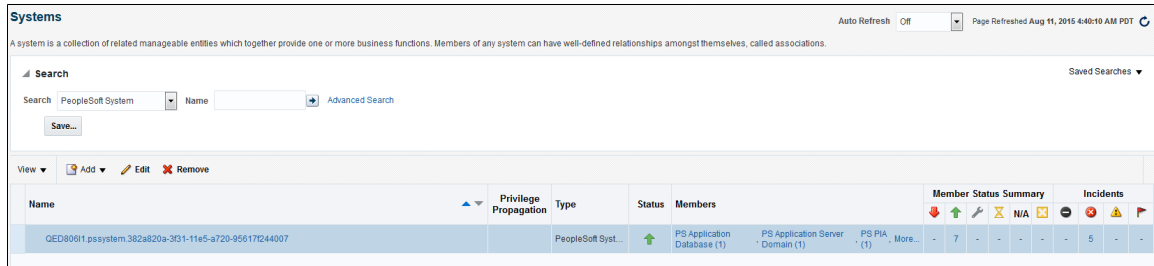


**PeopleSoft System URLs**

You can define different system URLs to be accessed in Enterprise Manager. Only users who have full target privileges can manage PeopleSoft system URLs in Enterprise Manager. To manage PeopleSoft URLs associated with a system, select the desired PeopleSoft system from the PeopleSoft Home Page and click the ‘Manage System URLs’ button

**Image: Manage System URLs**

Manage System URLs page

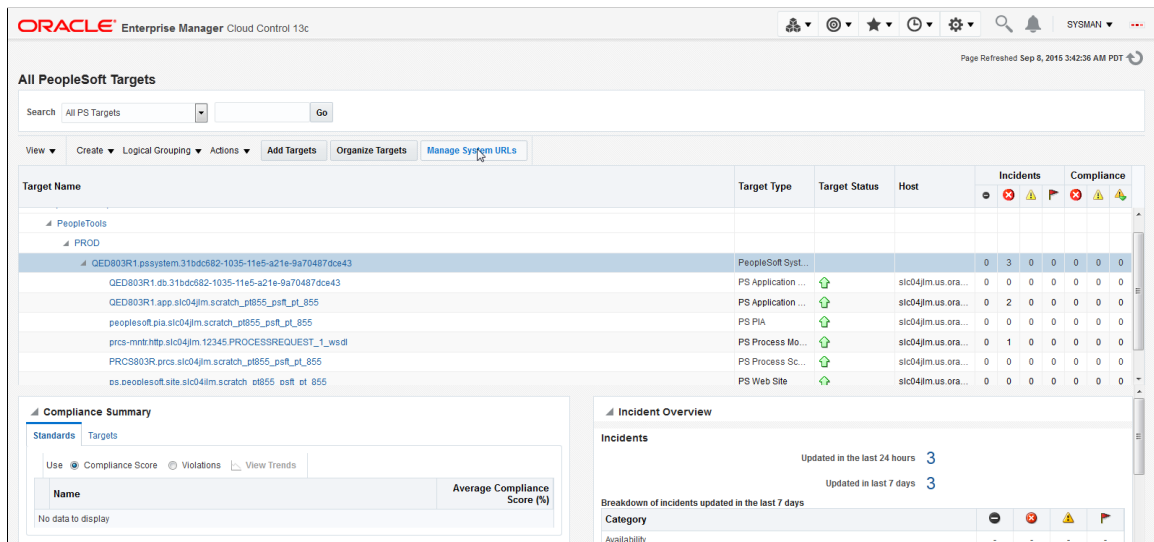

**Note:** The system administrator is responsible for populating the correct URL fields. The system does not verify the URL and by default, the URL fields are blank.

PeopleSoft delivers the following system URL types for you to create and associate URLs to your PeopleSoft system.

- Process Scheduler Management (targetType is PS Website)

You can enter the URL for any of the submenus used in PeopleTools Process Scheduler. For example, Process Monitor and Application Engine. Once you have defined this system URL, you can access it

by selecting Administration for the PS Process Scheduler Domain target, then click Manage Process Scheduler in PIA.

- Web Profile Search (targetType is PS Website)

This URL is associated with a PS Web Site target. Enter the URL from a PeopleSoft application to open its web profile page. The naming convention for this URL is <WebSite\_Name>+\_Web Profile Search.

- PIA Signon (targetType is PS Website)

You may have multiple values for PIA—however, the PS Web Site is the primary key. The PS Web Site drop-down list in the Create URL page shows only the PS Web Sites that have been defined in the PeopleSoft system. If there are no PS Web Sites present in the PeopleSoft system you cannot create a PIA Signon URL entry. The naming convention for this URL is <WebSite\_Name>+\_PIA Signon.

- Integration Broker Monitor Message (targetType is PS Website)

This URL is associated with a PS Web Site target. Enter the URL from a PeopleSoft application to open its Integration Broker profile page. The naming convention for this URL is <WebSite\_Name>+\_Integration Broker Monitor Message.


- Web Server Administration (targetType is PIA)

This refers to WebSphere, Weblogic, or OAS web server administration site. Enter the URL here to access the web server administration site from Enterprise Manager. You may have multiple values here, while the PS PIA target is the primary key. The naming convention for this URL is <PIA\_Name>+\_Web Server Administration.

These URLs can also be accessed via the Related Links option on the General Pane in their respective target owners' page. If no URL has been specified for the URL Type, you will be navigated to the Manage URLs Page where you can do it.

**Image: Related Links option**

Related Links option

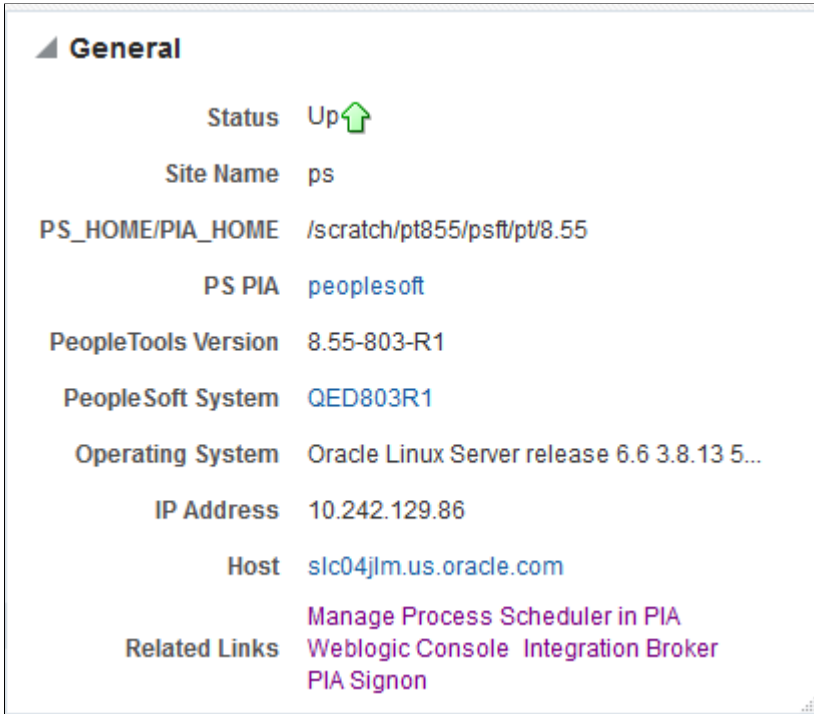

Click the PeopleSoft System URL Setup link in the Related Links region of the PeopleSoft System homepage to access the PeopleSoft System URL page.

**Image: PeopleSoft System URL page**

This example illustrates the fields and controls on the PeopleSoft System URL page. You can find definitions for the fields and controls later on this page.



**Edit**

Select a URL , then click to enter changes to previously created PeopleSoft system URLs.

**Remove**

Click to remove a PeopleSoft system URL.

**Create**

Click to display the Create PeopleSoft System URL page. Select the URL type and make other appropriate selections. Click Save.

**Note:** By default, the system prepends http:// to the front of the URL, if not already present, when saving the record.

## PeopleSoft System Topology

The Topology page shows a graphical view of a PeopleSoft system and enables you to perform several tasks.


From the Topology page, you can:

- See the status of each target—icons are green (up), red (down), light gray (unknown), dark gray (blackout).
- Display data that is refreshed every 30 seconds, or manually if specified.
- Zoom in and out by clicking the icons in the left-hand column. Show summary information on the number of Incidents and rule violations on a per target or system basis.

To view a PeopleSoft system in the Topology Viewer, On the PeopleSoft target page, Click the target menu item and then select Members, Topology and select a PeopleSoft system. The homepage appears, select Topology. The Topology Viewer opens.

**Image: PeopleSoft System Topology**

This example illustrates the fields and controls on the PeopleSoft System Topology.

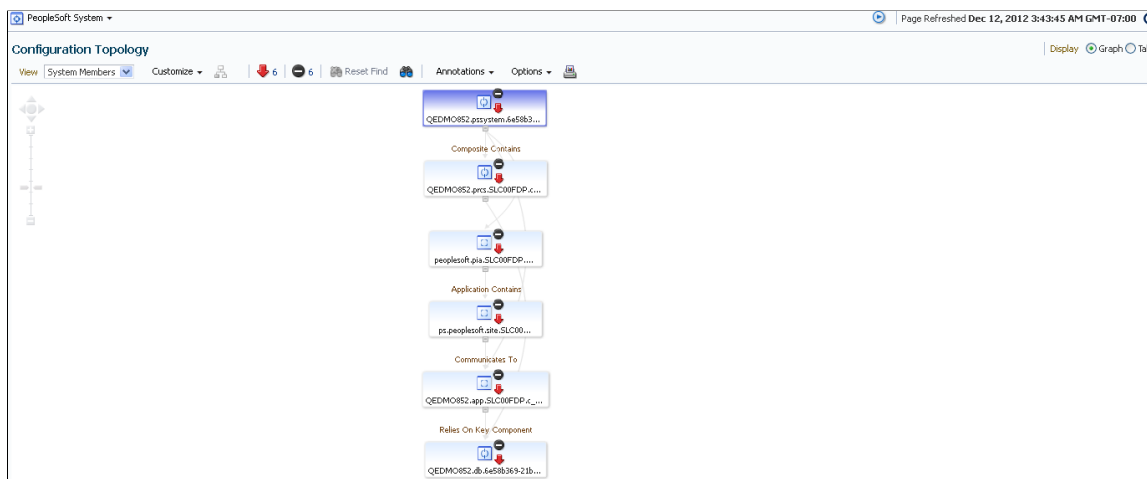



# Security for PeopleSoft Application Management Plug-in

---

## Understanding Enterprise Manager Security

The PeopleSoft Application Management Plug—in relies on Oracle Enterprise Manager's security framework for most security features.

Enterprise Manager identifies *administrators* to manage the Enterprise Manager administration accounts. These are the administrator access categories:

<b>Administrator</b>	This is considered the regular Enterprise Manager administrator.
<b>Super Administrator</b>	This is considered the most powerful Enterprise Manager administrator with full access privileges to all targets and administrator accounts within the Enterprise Manager environment. Only super administrators can perform administrative operations on regular administrator accounts.
<b>Repository Owner</b>	This is the database administrator for the Management Repository. This account cannot be modified, duplicated, or deleted.

From the Enterprise Manager Cloud Control Console, you can create and manage new administrator accounts. Each administrator account includes its own login credentials, and a set of privileges that are assigned to the account.

---

**Important!** In the current version of the PeopleSoft Application management Plug-in, roles are not supported. The PeopleSoft AMP only reads the system and target privileges that are added directly to the user. It does not currently recognize system and target privileges assigned to a user by way of a role. As such, system and target privileges must be added directly to the user account for managing PeopleSoft targets.

---

## Working With Target Privileges

Target privileges enable an administrator to perform operations on a target. Certain privileges are automatically given to administrators based on other privileges. For example, granting any privileges on a target automatically grants the View target privilege on the host.

Target privileges are divided into these groups:

<b>View</b>	Enables the administrator to view properties, inventory, and monitor information about a target. The view privilege is
-------------	--

propagated to all members of aggregate targets such as groups and systems.

---

**Note:** The view privilege must also be assigned to the agent of the target.

---

### **Operator**

Enables the administrator to perform the following operations on a target: startup, shutdown, edit target properties, view the components of the system, modify system membership, add charts to the system, create or edit system topology, customize the dashboard associated with the system, change the columns that appear on the System Members page, and black out the system and its components. The Operator Target privilege does not automatically propagate to members of the System.

### **Full**

Implicitly grants all the target privileges and enables the administrator to delete a target and configure credentials for maintenance operations of a target.

When you create a system, you become its owner and automatically receive full privileges for the system and view on all targets. Certain privileges are automatically given to administrators based on other privileges. For example, granting any privileges on a target automatically grants the View target privilege on the host.

### **Related Links**

[Target Actions and Privileges](#)

---

## **Managing Target Preferred Credentials**

Target Preferred Credentials is a credential specifically applied to a single target for a particular user.

Preferred credentials simplify access to managed targets by storing target login credentials in the Management Repository. With preferred credentials set, users can access an Enterprise Manager target that recognizes those credentials without being prompted to log into the target. Preferred credentials are set on a per user, per target basis, thus ensuring the security of the managed enterprise environment.

When you create a domain, you are prompted to retain the same credential as the preferred host. You may choose to enter a new credential.

To manage Enterprise Manager preferred credentials:

1. On the Enterprise Manager Cloud Control page, select Setup, Security, Preferred Credentials.

Enterprise Manager displays the Preferred Credentials page. The first column lists all the target types.

2. Click the Manage Preferred Credentials button.
3. In the Default Credential Section, select a row and then click Set.

4. In the Select Named Credential dialog box, enter the required parameters and then click Save.

## Working With Target Credentials

Each of the target privilege levels are assigned actions that can be performed whenever the privilege is assigned to a role or user.

See [Target Actions and Privileges](#).

The Target Credentials page is used to verify credentials.

Depending on what actions you want to perform, you may be required to enter host credentials in the Target Credentials page.

If desired, you can select the Saved Preferred Credentials check box, and the system will not prompt for credentials the next time you initiate the action for this target (when you are the current user in Enterprise Manager).

When the user is creating a new target or discovering an existing target, you can choose to select the preferred credentials or the named credentials. The credential that you select becomes the preferred and monitoring credential for the discovered or newly created targets.

### Image: Preferred Credentials for Target Host

This example illustrates the fields and controls on the Preferred Credentials for Target Host.

**Credentials**  
Select Credential

Select the preferred credential or one of the existing named credentials. The selected credential will be chosen as the preferred and monitoring credential for the newly created or discovered targets.

Credential  Preferred  Named

Preferred Credential Name: Normal Host Credentials

Attribute	Value
UserName	psoft
Password	*****

[More Details](#)

### Image: Named Credential for Target Host

This example illustrates the fields and controls on the Named Credential for Target Host.

**Credentials**  
Select Credential

Select the preferred credential or one of the existing named credentials. The selected credential will be chosen as the preferred and monitoring credential for the newly created or discovered targets.

Credential  Preferred  Named

Credential Name: PSOFT

Attribute	Value
UserName	psoft
Password	*****

[More Details](#)

**Note:** If the preferred credential is already set then you will not be prompted for credential when invoking administrative actions from the Target Administration tab.

If the preferred credential is not set for the target, you will be prompted to either select a new credential or a named credential. The selected credentials is used to run the administrative action on the target.

### Image: New Credentials for Target Host

This example illustrates the fields and controls on the New Credentials for Target Host.

## Working With Enterprise Manager User Accounts

There are a variety of user accounts that you may use with your Enterprise Manager system. Which accounts you use and how you manage them with your PeopleSoft system depends on a variety of factors, including your security implementation and your operating system. Because the topic of user accounts should be considered at the time of your installation, this topic is discussed in detail within the PeopleSoft Application Management Plug—in installation documentation that is provided with the plug-in software.

See, *Installation Guide: PeopleSoft Application Management Plug—in 13.2.1.1.0 for Oracle Enterprise Manager 13c*.

## Updating Target Credentials for PeopleSoft Targets

Target credentials are stored for each PeopleSoft target when it is discovered or created on Enterprise Manager Cloud Console. The target credentials are stored in \$AGENT\_HOME\sysman\emd\targets.xml and used for target metric collection. Due to security restrictions, it is likely that the password will expire eventually for hosts. If the password expires, metric collection fails for the PeopleSoft targets.

If the password for target credentials expires, one of the following solutions can be used to change the password for the PeopleSoft targets.

- Remove the target from your system in Enterprise Manager, and rediscover it.

See [Understanding the Discovery Process](#).

- Use the Enterprise Manager Command Line Interface (EM CLI).

EM CLI installation and setup instructions are available at the following local Enterprise Manager Cloud Console link.

`https://<machinename>:<portnumber>/em/console/emcli/download`

For example:

<https://st-hp16.peoplesoft.com:7880/em/console/emcli/download>

For more information on EM CLI refer to the EM CLI documentation provided by Oracle.

The syntax of the EM CLI command to change the password is:

```
emcli update_password
-target_type="ttype"
-target_name="tname"
-credential_type="cred_type"
-key_column="column_name:column_value"
-non_key_column="col:oldvalue:newvalue;..."
```

For example, the following command changes the password for target credentials of an application server target:

```
>emcli update_password
-target_type=ps_app_server
-target_name=newappl.app.st-hpp03.ds1_home_psoft_psft_pt_853-809-I1
-credential_type=PsoftHostCreds
-key_column="HOST_USERNAME:psoft"
-non_key_column="HOST_PASSWORD:psoft456:psoft"
```

Similarly, the password can be changed for other PeopleSoft target types. Change the target name, type, username and password in the above command for other PeopleSoft targets.

<b>Target</b>	<b>target_type Value</b>
PS Application Server Domain	ps_app_server
PS Process Scheduler Domain	ps_process_scheduler
PS Search Server Domain	ps_search_server
PS PIA	ps_pia
PS Website	ps_web_site
PS Process Monitor	ps_process_monitor
PS Application Database	ps_app_db

**Note:** To change the password for multiple targets, the change password commands for multiple targets can be stored in a script and run once to update multiple passwords.



# Validating Rules

---

## Understanding Compliance for PeopleSoft Application Management Plug-in

The Oracle Environment Management Compliance Management solution provides the capability to define, customize, and manage Compliance Frameworks and Compliance Standards. It also provides the tools to evaluate targets and systems for compliance with business best practices in terms of configuration, security, storage, and so on.

The compliance solution

- Automatically determines if targets and systems have valid configuration settings.
- Automatically determines if targets and systems are exposed to configuration-related vulnerabilities.
- Advises how to change configuration to bring targets and systems into compliance with respect to best practices.
- Provides real-time monitoring of a target's files, process, users, Windows registry entries, and more to let EM users know where configuration change is taking place in their environment.
- Determines if real-time detected configuration changes were authorized by open change management requests. Violations are created when an action is determined to be unauthorized.
- Provides out-of-box Compliance Frameworks (PCI, CIS, for example) and compliance standards to map to Compliance Standard Rules. This mapping makes it possible to visualize how out of compliance settings and actions will affect any compliance framework an organization follows.

---

## Compliance Feature Overview

Compliance Framework

A compliance framework is an industry-specified best practices guideline that deals with the underlying IT infrastructure, applications, business services and processes, and how they are organized, managed and monitored.

Compliance Standard


Compliance Standard is EM's representation of a compliance control that must be tested against some set of IT infrastructure to determine if the control is being followed. Compliance standards can be mapped to Compliance Frameworks so that violations can result in a compliance score impact on the Compliance Framework.

### Compliance Standard Rule

Compliance standard rules specify the actual check that is going to happen. These rules are mapped to one or more Compliance Standard.


### Image: Compliance Standards

This example illustrates the fields and controls on the Compliance Standards tab.

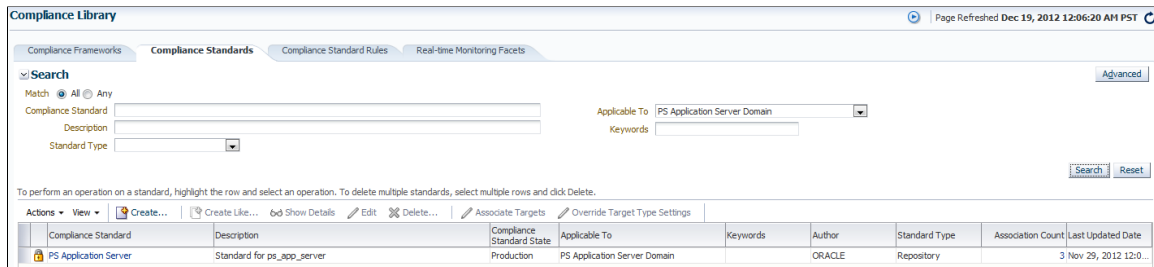

### Image: Compliance Standard Rules

This example illustrates the fields and controls on the Compliance Standard Rules.

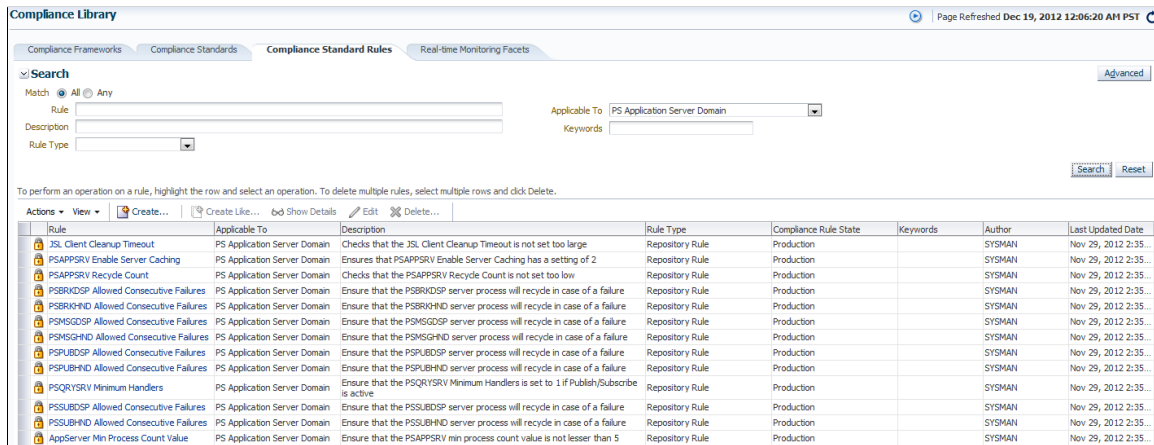

## Associating Compliance Standard to a PeopleSoft Target

When you deploy PeopleSoft AMP on OMS, the PeopleSoft compliance entities like rules, standards, standard group, and the framework appear in the compliance library. To view these entities, select Enterprise, Compliance, Library.

Compliance rules are available to PS Application Server, PS PIA, and PS WebSite targets only. After a compliance standard is available for a target type, you must manually associated each target to a PeopleSoft target to generate violation.

1. Select Enterprise, Compliance, Library.
2. Click the Compliance Standard tab.
3. Search and select the standards for PeopleSoft target.
4. Click the Associate Targets button.
5. Click Add.



6. Select the target and then click OK.

## Viewing the Violation Message

1. Select Enterprise, Compliance, Results.
2. Click Standard and then click Show Details.

### Image: Compliance Standard Result Details

This example illustrates the fields and controls on the Compliance Standard Result Details.

The screenshot displays the 'Compliance Standard Result Detail' page for the rule 'AppServer Min Process Count Value (Compliance Standard Rules)'. The page is divided into several sections:

- Summary:** A table listing violation events. The table has columns for Target Name, AppServer Process Count Value, Status, Priority, Acknowledged, and Escalated. One row is visible with Target Name 'E53808R2.app.scl...' and a count of 2.
- Incident Attributes:** A section for additional details about the incident.
- Event Details:** A detailed view of the selected event. It includes:
  - Root Compliance: PS Application Server
  - Root Compliance Standard: ORACLE
  - Standard Author: 1
  - Standard Version: 1
  - Rule Name: AppServer Min Process Count Value
  - Rule Type: Repository
  - Target: E53808R2.app.scl20243.dsl\_home\_psoft\_dom808r2 (PS Application Server Domain)
  - Event Reported: Dec 18, 2012 4:12:44 PM PST
  - Last Updated: Dec 19, 2012 12:12:44 AM PST
  - Message: The AppServer Min count is 2 which is less than 5
  - Last Comment: The AppServer Min count is 2 which is less than 5: on Dec 19, 2012 12:12:44 AM PST
  - Internal Event Name: CONFIGURED\_SERVER\_COUNT
  - Event Type: Compliance Standard Rule Violation
  - Category: Unclassified
  - Recorded: Dec 19, 2012 12:12:44 AM PST
- Guided Resolution:** A section providing recommendations and actions.
  - Recommendations: The AppServer Min Count must be greater than or equals 5
  - Diagnostics: View topology, View recent configuration changes
  - Actions: Disable rule for this target
  - Checkboxes: This event will be automatically cleared when the underlying issue is resolved, To stop repeat notifications, create an incident for this event and acknowledge it.
- Violation Details:** A section showing the specific violation: AppServer Process Count Value: 2



## Chapter 13

# Configuration and Metric Data Collected

---

## Configuration Data Collected

Enterprise Manager collects configuration data from each target type's configuration. Configuration data is collected on a regular basis—the default is once a day—and is transmitted to the Oracle Management Service. The first configuration collection occurs after the initial discovery process.

For subsequent configuration collections, the Oracle Management Service receives and parses the data and saves updates to the Management Repository. In addition to the regularly scheduled configuration collection process, collections are triggered every time you change a target's configuration from within Enterprise Manager.

<b>PeopleSoft Target Type</b>	<b>Data in These Files</b>
PS Application Database	PeopleTools tables
PS Application Server Domain	psappsrv.cfg, psappsrv.ubx
PS Process Scheduler Domain	pspres.cfg, pspres.ubx
PS Search Server Domain	pssrchsvr.cfg, pssrchsvr.ubx
PS PIA	piaInstallLog.xml, config_prop, setEnv.sh/cmd or opmn.xml or server.xml
PS Web Site	web.xml, configuration.properties, integrationGateway.properties, pstools.properties, config_prop
PS Process Monitor	For the PS Process Monitor target configuration, only the PeopleTools version and the WSDL URL is collected as part of configuration metrics. These two properties are collected from the PS Process Monitor target properties that are stored in \$AGENT_HOME/sysman/emd/targets.xml.

---

## Metric Data Collected

Metric data refers to the collection of data that changes frequently, such as status, memory, disk utilization, and so on. PeopleSoft delivers predefined metric types and default collection times for each target type. The metrics can be viewed by clicking the All Metrics link on each target homepage.

The metric data collected is saved to the Management Repository and is compared to predefined thresholds for each target. If a threshold has been reached, the system generates an alert. The Incidents display on each target's homepage.

<b>Target Type</b>	<b>Attribute Name</b>	<b>Collection Schedule</b>	<b>Description</b>
PS Application Database	Availability/Response	10 minutes	Checks the status of the PS Application Database
PS Application Server Domain	Availability/Response	1 minute	Checks the status of PS Application Server Domain
PS Application Server Domain	# of Process Queued for App Server	10 minutes	Monitors the number of PSAPPSRV processes queued for a PS Application Server Domain. Generates an alert if the defined threshold is reached.
PS Application Server Domain	# of Process Queued for BRK Dispatcher (if enabled)	13 minutes	Monitors the number of PSBRKDSP processes queued for a PS Application Server Domain. Generates an alert if the defined threshold is reached.
PS Application Server Domain	# of Process Queued for BRK Handler (if enabled)	14 minutes	Monitors the number of PSBRKHND processes queued for a PS Application Server Domain. Generates an alert if the defined threshold is reached.
PS Application Server Domain	# of Process Queued for PUB Dispatcher (if enabled)	12 minutes	Monitors the number of PSPUBDSP processes queued for a PS Application Server Domain. Generates an alert if the defined threshold is reached.
PS Application Server Domain	# of Process Queued for PUB Handler (if enabled)	15 minutes	Monitors the number of PSPUBHND processes queued for a PS Application Server Domain. Generates an alert if the defined threshold is reached.
PS Application Server Domain	# of Process Queued for SUB Dispatcher (if enabled)	16 minutes	Monitors the number of PSSUBDSP processes queued for a PS Application Server Domain. Generates an alert if the defined threshold is reached.
PS Application Server Domain	# of Process Queued for SUB Handler (if enabled)	17 minutes	Monitors the number of PSSUBHND processes queued for a PS Application Server Domain. Generates an alert if the defined threshold is reached.

<b>Target Type</b>	<b>Attribute Name</b>	<b>Collection Schedule</b>	<b>Description</b>
PS Application Server Domain	PSAPPSRV Handler Count	5 minutes	Monitors the number of active PSAPPSRV processes. Generates Incidents if the count is above the specified value.
PS Application Server Domain	Total Tuxedo Connections	5 minutes	Counts the number of Tuxedo connections to the PS Application Server Domain. Generates Incidents if the count is above the specified value.
PS Application Server Domain	Failed Processes	5 minutes	Shows the number of server processes that are down within a domain. The domain configuration should be verified against the server status. It generates Incidents if the failed processes count is greater than or equal to 1.
PS Application Server Domain	JSH Aborts	5 minutes	Shows the number of application server domain JSH Aborts. If the value exceeds the threshold, the system logs and alert.
PS Application Server Domain	JSH Load	5 minutes	The number of JSHs loaded. Formula for this count is:  (Sum of Bgn values for JSH handlers in the client status) - (Sum of Cmmt values for JSH handlers in the client status).  If the value exceeds the threshold, the system logs an alert.
PS Application Server Domain	WSH Aborts	5 minutes	Shows the number of PS Application Server Domain WSH Aborts. If the value exceeds the threshold, the system logs and alert.
PS Application Server Domain	WSH Loads	5 minutes	The number of WSHs loaded. Formula for this count is:  (Sum of Bgn values for WSH handlers in the client status) - (Sum of Cmmt values for WSH handlers in the client status).  If the value exceeds the threshold, the system logs and alert.

<b>Target Type</b>	<b>Attribute Name</b>	<b>Collection Schedule</b>	<b>Description</b>
PS Application Server Domain	PS Application Server Client/Queue Server/Status	Real time	Displays the status of the client, queue, and server elements of the domain. This is equivalent to using the Domain Status menu options in PSADMIN.
PS Application Server Domain	Long Running Service Request Count	1 hour	Monitors the number of Service Requests that are long running (more than 10 secs). Generates alerts with multiple severity levels if this count exceeds pre-defined thresholds
PS Application Server Domain	Memory Usage	1 hour	Monitors the memory footprint used by App Server processes. Generates alerts when it exceeds the pre-defined threshold.
PS Application Server Domain	Tuxedo File Count	1 day	Monitors the number of tuxedo files created in temporary directory. This is an indicator of Tuxedo memory queue size. Generates alerts when it exceeds the pre-defined threshold.
PS Application Server Domain	Memory Usage Growth	15 minutes	Monitors the memory footprint growth pattern of the App Server. Generates alerts with multiple levels of severity if the number of spikes in memory usage growth exceeds pre-defined thresholds
PS Application Server Domain	PeopleTools State Files Count	1 hour	Monitors the number of PeopleTools State files generated in the domain logs directory. Generates alerts if the count exceeds a pre-defined threshold.
PS Application Server Domain	Tuxedo Service Error Count	1 hour	Monitors the number of Tuxedo Service errors in the App Server log files. Generates alerts with multiple levels of severity if the count exceeds pre-defined thresholds.
PS Application Server Domain	Paging Count	15 minutes	Monitors the paging activity on the AppServer. Generates alerts if the paging is happening very frequently.

<b>Target Type</b>	<b>Attribute Name</b>	<b>Collection Schedule</b>	<b>Description</b>
PS Application Server Domain	App Server Queues Wait Count	15 minutes	Monitors the count of App Server Queues experiencing wait times. Generates alerts with multiple levels of severity if the count exceeds pre-defined thresholds.
PS Application Server Domain	IB Queue Flowing	15 minutes	Monitors the movement of the IB Queue. Generates alert if it is stuck.
PS Application Server Domain	Heavy Transaction Activity	15 minutes	Monitors heavy transaction activity to file system. Generates alert if the heavy activity persists for more than a pre-defined period of time.
PS Application Server Domain	App Server Restart Error Count	15 minutes	Monitors if there are App Server restart related errors in the log files. Generates alerts if there are any such restart errors in the logs.
PS Application Server Domain	Low Disk Space	1 day	Monitors the disk space in the host on which the database, App Server or PIA targets exists is running. Generate alert if the disk space is low.
PS Application Server Domain	Archive TraceSql Files	1 day	Monitors the TraceSql files that are huge or old that requires archiving. Generates alerts if such files exist.
PS Application Server Domain	Archive Old Log Files	1 day	Monitors existing old log files that is to be archived. Generates alerts if such files exist.
PS Application Server Domain	Highly Frequent GC Count	1 hour	Monitors the number of highly frequent (within 15 seconds apart) Garbage Collections that are occurring in Web Servers. Generates alerts with multiple severity levels if this count exceeds the pre-defined thresholds.
PS Application Database Domain	Low Disk Space	1 day	Monitors the disk space in the host on which the database, App Server or PIA targets exists is running. Generate alert if the disk space is low.
PS Process Scheduler Domain	Availability/Response	1 minutes	Checks the status of PS Process Scheduler Domain.

<b>Target Type</b>	<b>Attribute Name</b>	<b>Collection Schedule</b>	<b>Description</b>
PS Process Scheduler Domain	# Queued Processes for Process Scheduler (PSPRCSR)	15 minutes	Monitors the number of PSPRCSR processes queued for a PS Process Scheduler Domain. Generates an alert if the defined threshold has been reached.
PS Process Scheduler Domain	# Queued Processes for Distribution Server (PSDSTR)	15 minutes	Monitors the number of PSDSTR processes queued for a PS Process Scheduler Domain. Generates an alert if the defined threshold has been reached.
PS Process Scheduler Domain	Failed Processes	5 minutes	Displays the current number of failed or down server processes within the domain. It generates Incidents if the failed processes count is greater than or equal to 1.
PS Process Scheduler Domain	PS Server Queue/Server Status	Real time	Displays the status of the queue and server elements of the domain. This is equivalent to using the Domain Status menu options in PSADMIN.
PS Process Scheduler	PS Process Scheduler Log Monitor	5 Minutes	This metric contains the details of the limit on the number of sub folders inside the Peoplesoft Process Scheduler Log Location .An alert message is generated if the number of sub folders exceeds the os_limit.
PS PIA	Availability/Response	1 minute	Checks the status of PS PIA.
PS PIA	Highly Frequent GC Count	1 hour	Monitors the number of highly frequent (within 15 seconds apart) Garbage Collections that are occurring in Web Servers. Generates alerts with multiple severity levels if this count exceeds the pre-defined thresholds.
PS PIA	Fatal Error Count	1 hour	Monitors the number of fatal errors in the servlet logs. Generates alerts with multiple severity levels if this count exceeds the pre-defined thresholds.



<b>Target Type</b>	<b>Attribute Name</b>	<b>Collection Schedule</b>	<b>Description</b>
PS PIA	WAIT State Socket Count	1 hour	Monitors the number of Web Server Sockets that are in WAIT State. Generates alerts with multiple severity levels if this count exceeds the pre-defined thresholds.
PS PIA	GC Frequency	15 minutes	Monitors the frequency with which garbage collection happens in the Web Server. Generates alerts with multiple levels of severity if the frequency of garbage collection exceeds pre-defined thresholds.
PS PIA	Web Profile Load Error Count	1 hour	Monitors the number of Web Profile Load errors in the Web Server log. Generates alert if the error count exceeds pre-defined threshold.
PS PIA	Low Disk Space	1 day	Monitors the disk space in the host on which the database, App Server or PIA targets exists is running. Generate alert if the disk space is low.
PS Web Site	Availability/Response	1 minute	Checks the status of PS PIA where the PS Web Site is connected.
PS WebSite	PS FTP Log Monitor	5 Minutes	This metric contains the details of the limit on the number of sub folders inside the Peoplesoft PIA FTP Location .An alert message is generated if the number of sub folders exceeds the os_limit.s
PS WebSite	PS Reports Monitor	5 Minutes	This metric contains the details of the limit on the number of sub folders inside the Peoplesoft PIA Report Repository Location .An alert message is generated if the number of sub folders exceeds the os_limit.s.
PS WebSite	Report Repository Size	1 day	This is also called <i>PS Reports Monitor</i> in PeopleSoft plug-in.
PS Search Server Domain	Availability/Response	1 minute	Checks the status of the PS Search Server Domain.

<b>Target Type</b>	<b>Attribute Name</b>	<b>Collection Schedule</b>	<b>Description</b>
PS Search Server Domain	# Queued Processes for Search Server (PSSRCHSRV)	5 minutes	Monitors the number of PSSRCHSRV processes queued for a PS Search Server Domain. Generates an alert if the defined threshold has been reached.
PS Search Server Domain	PS Search Server Client/Queue/Server Status	Real time	Displays the status of the client, queue, and server elements of the domain. This is equivalent to using the Domain Status menu options in PSADMIN.
PS Process Monitor	Availability/Response	1 minute	Checks the status of the PS Process Monitor.
PS Process Monitor	# of Running PeopleSoft Processes	30 minutes	Monitors the count of running processes (Run Status = Processing) in the last 1 hour.
PS Process Monitor	# of Successful PeopleSoft Processes	30 minutes	Monitors the count of successfully completed processes (Run Status = Success) in the last 1 hour.
PS Process Monitor	Failed count	30 minutes	Displays the failed process count using Reporting web service. Run Status include "Error" and "No Success." Generates Incidents if the metric value exceeds threshold value.
PS Process Monitor	Not Posted count	30 minutes	Displays the process count of those not posted. Distribution Status is "Not posted." Generates Incidents if the metric value exceeds threshold value.
PS Process Monitor	Processes posted for more than 15 minutes	30 minutes	Displays the processes count for processes in the posting state for more than 15 minutes. Generates Incidents if the metric value exceeds threshold value.
PS Process Monitor	Batch Processes stuck count	30 minutes	Checks the processes which are stuck. Run Status would be "Processing" for more than 30 minutes. Generates Incidents if the metric value exceeds threshold value.

<b>Target Type</b>	<b>Attribute Name</b>	<b>Collection Schedule</b>	<b>Description</b>
PS Process Monitor	Pending processes count	30 minutes	Checks the processes which are pending. Run Status would be "Queued" for greater than or equal to 30 minutes. Generates Incidents if the metric value exceeds threshold value.
PS Process Monitor	Initiated but pending processes count	30 minutes	Checks the processes which are initiated but pending. Run Status should be "Initiated" for greater than or equal to 30 minutes. Generates Incidents if the metric value exceeds threshold value.
PS Process Monitor	Failed PS Process Metrics Data	Real time	Displays the failed processes using Reporting web service. Run Status include "Error" and "No Success."
PS Process Monitor	Initiated But Pending PS Process Metrics Data	Real time	Displays the processes which are initiated but pending. Run Status should be "Initiated" for greater than or equal to 30 minutes.
PS Process Monitor	Not Posted PS Process Metrics Data	Real time	Displays the processes that are not posted. Distribution Status is "Not posted."
PS Process Monitor	Pending Process Metrics Data	Real time	Displays the processes which are pending. Run Status would be "Queued" for greater than or equal to 30 minutes.
PS Process Monitor	Posting For More Than 15 Minutes Process Metrics Data	Real time	Displays the processes that are in the posting state for more than 15 minutes.
PS Process Monitor	Stuck PS Process Metrics Data	Real time	Displays the processes which are stuck. Run Status would be "Processing" for more than 30 minutes.
PS Process Monitor	Unallocated	Real Time	The number of processes which have the Run Status of "Queued" and have a Run Date and Time more than 30 minutes old and have not been assigned to any server yet.

<b>Target Type</b>	<b>Attribute Name</b>	<b>Collection Schedule</b>	<b>Description</b>
PS Process Monitor	PS Process Scheduler Suspended Status	5 Minutes	This metric contains the details of the Process Scheduler domains that are active but not responding. The Process Monitor is used for determining the hang status of the process scheduler domains. The collection interval is 5 minutes. This metric would determine the number of servers in the hang state and appropriately display the alert message as "The server(s) is(are) not responding".

To activate the metrics establish the JMX connection. In the *psappsrv.cfg* file, scroll to the *PSTOOLS* section to update the following:

- Enable Remote Administration = 1
- Enter *admin* as the remote administration User ID.
- Enter *{VI.1}7m4OtVwXFNyLclj6pZG69Q==* as the remote administration password.

---

**Note:** Enter the password either in plain text or encrypt using PSCipher

---

**Note:** The AppServer Minimum Process Count Value is implemented as a compliance rule that is applicable to PS Application server . A violation is generated if the Appserver’s minimum process count value is less than 5.

---

**Note:** WAIT State Socket Count, GC Frequency, Fatal Error Count are not applicable to WebSphere domain.

---

## Chapter 14

# Working with Privileges

---

## Target Actions and Privileges

---

**Important!** In the current version of the PeopleSoft Application management Plug-in, roles are not supported. The PeopleSoft AMP only reads the system and target privileges that are added directly to the user. It does not currently recognize system and target privileges assigned to a user by way of a role. As such, system and target privileges must be added directly to the user account for managing PeopleSoft targets.

---

The following table lists target actions for each of the target types and actions for systems and logs.

---

**Note:** Users assigned a super administrator role can perform all actions for all target types, systems, and logs.

---

## Target Actions and Privileges Tables

This section includes tables showing target actions, credentials, and privileges.

### PS Application Server Domain

<i>Target Actions</i>	<i>Target Credentials Required</i>	<i>Full Privilege</i>	<i>Operator Privilege</i>	<i>Viewer Privilege</i>
Create domain	Yes	Yes, with target system privileges		
Configure domain	Yes	Yes		
Import domain configuration from file	Yes	Yes, with target system privileges		
Create like domain	Yes	Yes, with target system privileges		
Compare to multiple configurations (jobs)		Yes		
Last collected configuration		Yes		
View saved configuration		Yes		

<b>Target Actions</b>	<b>Target Credentials Required</b>	<b>Full Privilege</b>	<b>Operator Privilege</b>	<b>Viewer Privilege</b>
History		Yes		
Copy configurations	Yes	Yes		
Create service (Windows only)	Yes	Yes		
Create messaging server	Yes	Yes		
Configure messaging server	Yes	Yes		
Delete messaging server	Yes	Yes		
Create service (Windows only)	Yes	Yes		
Configure service (Windows only)	Yes	Yes		
Install service (Windows only)	Yes	Yes		
Delete service (Windows only)	Yes	Yes		
Start domain (parallel and serial)	Yes	Yes	Yes	
Stop domain (forced and normal)	Yes	Yes	Yes	
Access Tuxedo command line (TMADMIN)	Yes	Yes	Yes	
Purge/archive cache	Yes	Yes	Yes	
View domain processes status		Yes	Yes	Yes
View domain queue status		Yes	Yes	Yes

<b>Target Actions</b>	<b>Target Credentials Required</b>	<b>Full Privilege</b>	<b>Operator Privilege</b>	<b>Viewer Privilege</b>
View domain client status		Yes	Yes	Yes
Delete domain	Yes	Yes		
Preload file cache	Yes	Yes	Yes	
Clean IPC resources	Yes	Yes	Yes	
Execute host command	Yes	Yes	Yes	
View domain status (stopped or running)		Yes	Yes	Yes

### PS Search Server Domain

<b>Target Actions</b>	<b>Target Credentials Required</b>	<b>Full Privilege</b>	<b>Operator Privilege</b>	<b>Viewer Privilege</b>
Create domain	Yes	Yes, with target system privileges		
Configure domain	Yes	Yes		
Compare to multiple configurations (Job)		Yes		
Last collected configuration		Yes		
View saved configuration		Yes		
History		Yes		
Start domain	Yes	Yes	Yes	
Stop domain (forced and normal)	Yes	Yes	Yes	
Delete domain	Yes	Yes		
Clean IPC resources	Yes	Yes	Yes	
Access Tuxedo command line (TMADMIN)	Yes	Yes	Yes	

<b>Target Actions</b>	<b>Target Credentials Required</b>	<b>Full Privilege</b>	<b>Operator Privilege</b>	<b>Viewer Privilege</b>
Create service (Windows only)	Yes	Yes		
Configure service (Windows only)	Yes	Yes		
Install service (Windows only)	Yes	Yes		
Delete service (Windows only)	Yes	Yes		
View domain processes status		Yes	Yes	Yes
View domain queue status		Yes	Yes	Yes
View domain client status		Yes	Yes	Yes
View domain status (stopped or running)		Yes	Yes	Yes
Execute host command	Yes	Yes	Yes	

## PS Process Scheduler Domain

<b>Target Actions</b>	<b>Target Credentials Required</b>	<b>Full Privilege</b>	<b>Operator Privilege</b>	<b>Viewer Privilege</b>
Create domain	Yes	Yes, with target system privileges		
Configure domain	Yes	Yes		
Import domain configuration from file	Yes	Yes, with target system privileges		
Create like domain	Yes	Yes, with target system privileges		
Compare to multiple configurations (Job)		Yes		
Last collected configuration		Yes		



<b>Target Actions</b>	<b>Target Credentials Required</b>	<b>Full Privilege</b>	<b>Operator Privilege</b>	<b>Viewer Privilege</b>
View saved configuration		Yes		
History		Yes		
Copy configurations	Yes	Yes		
Create service (Windows only)	Yes	Yes		
Configure service (Windows only)	Yes	Yes		
Install service (Windows only)	Yes	Yes		
Delete service (Windows only)	Yes	Yes		
Start domain	Yes	Yes	Yes	
Stop domain (forced and normal)	Yes	Yes	Yes	
Delete domain	Yes	Yes		
Clean IPC resources	Yes	Yes	Yes	
View domain processes status		Yes	Yes	Yes
View domain queue status		Yes	Yes	Yes
View domain status (stopped or running)		Yes	Yes	Yes
Execute host command	Yes	Yes	Yes	
Manage Process Scheduler in PIA	Yes, also prompted for PIA login	Yes	Yes	

**PS PIA**

<b>Target Actions</b>	<b>Target Credentials Required</b>	<b>Full Privilege</b>	<b>Operator Privilege</b>	<b>Viewer Privilege</b>
Edit setEnv	Yes	Yes		
Edit web.xml	Yes	Yes		
Compare to multiple configurations		Yes		
Last collected configuration		Yes		
View saved configuration		Yes		
History		Yes		
Start PIA	Yes	Yes	Yes	
Stop PIA	Yes	Yes	Yes	
Web server type administration console	Yes, also prompted for PIA login	Yes	Yes	Yes
Customize start/stop scripts		Yes		
Execute host command	Yes	Yes	Yes	
View web domain status (if stopped or running)		Yes	Yes	Yes
Process Monitor Setup	Yes	Yes, with target system privileges		

**PS Process Monitor**

<b>Target Actions</b>	<b>Target Credentials Required</b>	<b>Full Privilege</b>	<b>Operator Privilege</b>	<b>Viewer Privilege</b>
Compare domain configurations		Yes		
Compare to multiple configurations		Yes		

<b>Target Actions</b>	<b>Target Credentials Required</b>	<b>Full Privilege</b>	<b>Operator Privilege</b>	<b>Viewer Privilege</b>
Last collected configuration		Yes		
View saved configuration		Yes		
History		Yes		
Execute host command	Yes	Yes	Yes	
Process Monitor	Yes	Yes	Yes	
Schedule Process	Yes	Yes	Yes	
View predefined process metrics	No	Yes	Yes	Yes

## PS Web Site

<b>Target Actions</b>	<b>Target Credentials Required</b>	<b>Full Privilege</b>	<b>Operator Privilege</b>	<b>Viewer Privilege</b>
Configure site	Yes	Yes		
Web profile	Yes, also prompted for PIA login	Yes	Yes	
Integration Broker	Yes, also prompted for PIA login	Yes	Yes	
Compare configurations		Yes		
Compare to multiple configurations (jobs)		Yes		
Last collected configuration		Yes		
View saved configuration		Yes		
History		Yes		
PIA signon	Yes, also prompted for PIA login	Yes	Yes	Yes

<b>Target Actions</b>	<b>Target Credentials Required</b>	<b>Full Privilege</b>	<b>Operator Privilege</b>	<b>Viewer Privilege</b>
View web site status		Yes	Yes	Yes

### PS Application Database

<b>Target Actions</b>	<b>Target Credentials Required</b>	<b>Full Privilege</b>	<b>Operator Privilege</b>	<b>Viewer Privilege</b>
View status		Yes	Yes	Yes

### Log Management (All Targets Except PS Web Site, PS Process Monitor, and PS Application DB)

<b>Target Actions</b>	<b>Target Credentials Required</b>	<b>Full Role</b>	<b>Operator Role</b>	<b>Viewer Role</b>
Search logs	Yes	Yes	Yes	Yes
View logs	Yes	Yes	Yes	Yes
Purge logs	Yes	Yes	Yes	
Log management setup		Yes		

### Management Actions

<b>Target Actions</b>	<b>Target Credentials Required</b>	<b>Full Privilege</b>	<b>Operator Privilege</b>	<b>Viewer Privilege</b>
Create PeopleSoft system (only super administrator)				
Edit PeopleSoft system		Yes, if target access granted	Yes, if target access granted	
Delete PeopleSoft system		Yes, with target system privileges		
View PeopleSoft system		Yes, if target access granted	Yes, if target access granted	Yes, if target access granted
Add PeopleSoft URL		Yes		
Delete PeopleSoft URL		Yes		

<b>Target Actions</b>	<b>Target Credentials Required</b>	<b>Full Privilege</b>	<b>Operator Privilege</b>	<b>Viewer Privilege</b>
Edit PeopleSoft URL		Yes		
Access PeopleSoft system URLs		Yes	Yes	Yes
Add PeopleSoft targets (super administrator)				
Remove target		Yes, with target system privileges		
Start/Stop multiple domains (from PeopleSoft targets page)	Yes	Yes	Yes	



## Chapter 15

# Target Log Files

---

## Default Target Log Files

This section lists default log file locations and types for:

- PS PIA targets.
- PS Application Server Domains.
- PS Search Server Domains.
- PS Process Scheduler Domains.

## PS PIA Log Files

<i>File Location</i>	<i>Log File Type</i>
If using Weblogic: <PIA_HOME>/webserv/<Domain>/applications/peoplesoft/PSEMHUB/envmetadata/logs  If using WebSphere: <PIA_HOME>/webserv/<cellname>_<nodename>_<servername>/peoplesoft.ear/PSEMHUB/envmetadata/logs	*.txt
<PIA_HOME>/webserv/<Domain>/logs	*.log
<PIA_HOME>/webserv/<Domain>/logs/replaydump	*.bug
<OAS_HOME>/j2ee/<Domain>/log/<Domain>_default_island_1/	*.log
<WEBSHERE_HOME>/logs/<server_name>	*.log
<WEBSHERE_HOME>/logs	*.log

## PS Application Server Domain Log Files

<i>File Location</i>	<i>Log File Type</i>
<PS_CFG_HOME>/appserv/<appserver_domain>/LOGS	*.LOG TUXLOG.* *.trc *.tracesql *.mps *.lp process_state* *.dmp peopletools_state*
<PS_CFG_HOME>/appserv/<appserver_domain>	ULOG.<date> stderr stdout
<PS_CFG_HOME>/appserv	core

## PS Search Server Domain Log Files

<i>File Location</i>	<i>Log File Type</i>
<PS_CFG_HOME>/appserv/search/DOMAIN_NAME/LOGS	*.trc *.LOG *.log *.lp *.dmp process_state* peopletools_state*
<PS_CFG_HOME>/appserv/search/DOMAIN_NAME	stdout stderr ULOG*
<PS_CFG_HOME>/appserv	core



## PS Process Scheduler Server Log Files

<b>File Location</b>	<b>Log File Type</b>
<PS_CFG_HOME>/appserv/	core
<PS_CFG_HOME>/appserv/prcs/<prcs_domain>/	stderr stdout ULOG*
<PS_CFG_HOME>/appserv/prcs/<prcs_domain>/LOGS/	*.LOG process_state* peopletools_state* TUXLOG*
<PS_CFG_HOME>/appserv/prcs/<prcs_domain>/log_output/	delete_*.txt
<PS_CFG_HOME>/appserv/prcs/<prcs_domain>/log_output/_PSPRCSRLOG/	*.*
<PS_CFG_HOME>/appserv/prcs/<prcs_domain>/log_output/_PSDSTSRVLOG	*.*
<PS_CFG_HOME>/appserv/prcs/<prcs_domain>/log_output/_TUXLOG/	*.*
<PS_CFG_HOME>/appserv/prcs/<prcs_domain>/files/	*.*



## Chapter 16

# Target Rules

### PS Application Server Domain Rules

<i>Rule</i>	<i>Definition</i>	<i>Severity</i>
Client Cleanup Timeout	The value should be $\leq 20$ minutes. If it is greater than 20, a violation should be called out. Setting the value to 20 or less avoids having many idle client connections connected to the host. With client cleanup time out at a minimum value, it is a more effective use of the server's memory and CPU and improves performance.	Warning
PSAPPSRV Recycle Count	Value should be $\geq 5000$ . Setting this at zero or too low may cause memory swapping.	Warning
Enable Server Caching	Recommend a setting of 2 to minimize the cost of recycling the application servers.	Informational
PSQRYSRV Min Handler	Set this to 1 if the PUBSUB server for the domain was activated.	Informational
PSBRKDSP Allowed Consec Service Failures	Set to $> 1$ to enable the system to recycle on its own in an event of a service failure.	Informational
PSPUBDSP Allowed Consec Service Failures	Set to $> 1$ to enable the system to recycle on its own in an event of a service failure.	Informational
PSSUBDSP Allowed Consec Service Failures	Set to $> 1$ to enable the system to recycle on its own in an event of a service failure.	Informational
PSBRKHND Allowed Consec Service Failures	Set to $> 1$ to enable the system to recycle on its own in an event of a service failure.	Informational
PSPUBHND Allowed Consec Service Failures	Set to $> 1$ to enable the system to recycle on its own in an event of a service failure.	Informational
PSSUBHND Allowed Consec Service Failures	Set to $> 1$ to enable the system to recycle on its own in an event of a service failure.	Informational

## PS PIA Rule

<b>Rule</b>	<b>Definition</b>	<b>Severity</b>	<b>Configuration File</b>
JVM Heap size	Minimum and maximum heap size should be set to equal and it should be >= 256MB	Warning	SetEnv/opmn.xml/server.xml

## PS Web Site Rules

<b>Rule</b>	<b>Definition</b>	<b>Severity</b>	<b>Configuration File</b>
Ig.isc.serverURL	The application server and WSL port combination should relate to a valid application server domain whose PUBSUB feature is set to active or true.	Warning	IntegrationGateway.properties
Ig.isc.toolsRel	The PeopleTools version specified should be equal to the PeopleTools version of the web server domain up to the patch level.	Warning	IntegrationGateway.properties
Compress Responses	Should be activated or set to true to enable faster transfer of transactional messages across the network.	Informational	Web Profile
Compress Response Reference	Should be activated or set to true to activate the compression from the web server to browser.	Informational	Web Profile
Cache Portal Objects	Should be activated to improve system performance by reducing service requests from the web server to the application server.	Informational	Web Profile
Cache Proxied Javascripts	These should be set to true for improved performance.	Informational	Web Profile
Cache Target Contents	These should be set to true for improved performance.	Informational	Web Profile
Cache homepage	These should be set to true for improved performance.	Informational	Web Profile
Cache Generated HTML	These should be set to true for improved performance.	Informational	Web Profile

<b>Rule</b>	<b>Definition</b>	<b>Severity</b>	<b>Configuration File</b>
METAXP	Should be equal to Cache Stale Interval. Cache Stale Interval value is seconds while METAXP is in minutes. So there should be a conversion that happens to detect a violation.	Warning	PeopleTools, Personalization, Personalization Options. Option Category Level = PPTL



## Chapter 17

# Target Relationships

## Links That Display on Homepages

<i>Link Displayed</i>	<i>Where</i>	<i>What It Means</i>
PS Application Database	Homepage of PS Application Server, PS Process Scheduler, PS Search Server	Successful discovery of the PS Application Database to which the target is connected.
PS Search Server	PS Application Server homepage	Valid entry in the Remote Search Server Credentials field (Search Section) in an application server domain configuration (psappsrv.cfg file that includes the domain ID, its fully qualified host name, and the search server port.
PeopleSoft System	Homepage of all targets	The target is an element of a PeopleSoft system.
Messaging Server	PS Application Server page	Domain was created using a template (small, medium, large or custom) with these default sections of PUBSUB: PSBRKDSP_dflt, PSBRKHND_dflt, PSSUBDSP_dflt, PSSUBHND_dflt, PSPUBDSP_dflt, PSPUBHND_dflt
Windows Services Management	PS Application Server page, PS Process Scheduler page, and PS Search Server page	Host operating system is Windows
Manage Process Scheduler in PIA	PS Process Scheduler page	PS Process Scheduler Domain is an element in a PeopleSoft system and has a URL defined for it.
PS Application Server	PS Search Server homepage	PS Search Server Domain PSSRCHSRV section of configuration data has a valid entry for the application server credentials. The entry includes the domain ID, fully qualified host name and application server port (same value as the search server port).
Web Sites	PS PIA homepage	Successful discovery of PS Web Site, contained in this PS PIA target.
PS PIA	PS Web Site homepage PS Process Monitor homepage	Successful discovery of PS PIA in which the web site is contained.

<b>Link Displayed</b>	<b>Where</b>	<b>What It Means</b>
PS Process Monitor	PS PIA homepage	Successful setup of Process Monitor with PS PIA.
PROCESSREQUEST Webservice URL	PS Process Monitor homepage	Location of web service definition file configured using PeopleSoft Integration Broker. Process Monitor uses this web service to schedule and monitor PeopleSoft processes.
Reverse Proxy	PS PIA homepage	Yes value means the target is connected to a reverse proxy server.  N/A value means the target is not connected to a reverse proxy server.  Reverse proxy server data comes from the web profile's Virtual Addressing page.
Web Server Console	PS PIA page	PS PIA is an element in a PeopleSoft system and has a Web Server Administration URL defined for it.
Web Profile	PS Web Site page .	PS Web Site is an element of a PeopleSoft system and has a Web Profile URL defined for it.
Integration Broker	PS Web Site page	PS Web Site is an element of a PeopleSoft system and has a Integration Broker URL defined for it.
PIA Signon	PS Web Site page	PS Web Site is an element of a PeopleSoft system and has a PIA Signon URL defined for it.

---

## Relationships on Topology Page

<b>Topology Page Relationships</b>	<b>Established How</b>
PS PIA and PS Web Site	Defined by a discovery search on web server directories and paths.
PS Web Site and PS Application Server	Depends on the psserver value in the PS Web Site's configuration.properties file. Valid entry is the application server's fully qualified host name and its Jolt port.
PS Application Server and PS Search Server	Depends on the remote search server credentials value in the application server domain's configuration (psappsrv.cfg) file. Valid entry includes the search server's domain ID, its fully qualified host name and the search server port.



<b><i>Topology Page Relationships</i></b>	<b><i>Established How</i></b>
PS Application Server and PS Application Database PS Process Scheduler and PS Application Database PS Search Server and PS Application Database	Defined by the database GUID, which is generated when an application server connects to the database the first time.
PS Process Monitor and PS PIA	Defined by user during Discovery or Process Monitor Setup. Process Monitor can be registered in repository with pre-discovered PS PIA target.



# Troubleshooting

---

## PeopleSoft AMP Agent Logs

### PeopleSoft AMP Issues on Management Agent

The log files are located in the USER\_HOME directory for each host.

To debug PSFT plugin issues on Management Agent, navigate to the log files for the host here, USER\_HOME/psft/pt/emplugin/logs.

### PeopleSoft AMP on Enterprise Manager 13c on Oracle Management Service

Navigate to MW\_HOME/gc\_inst/em/EMGC\_OMS1/sysman/log - emoms.trc & emoms.log.

### Enable DEBUG Logging on Oracle Management Service

Run the emctl command, OMS\_HOME/bin/emctl set property .name log4j.rootCategory .value "DEBUG, emlogAppender, emtrcAppender" .module logging.

### Enable DEBUG Logging on Management Agent

Navigate to AGENT\_HOME/plugins/oracle.apps.psft.agent.plugin\_13.2.1.1.0/config/psemagentlogging.properties to enable debug logging.

To enable diagnostic logging feature, enable diagnostic logger Read more about enabling diagnostic logging in PeopleSoft AMP Diagnostic Utility section in this Appendix Note: To enable DEBUG logging for metrics/monitoring issues, enable it in psemmetricslogging.properties and to debug discovery issues enable it in psemdiscoverylogging.properties (found under PSFT Discovery PLUGIN\_ROOT location - AGENT\_HOME/plugins/oracle.apps.psft.discovery.plugin\_13.2.1.1.0/config/psemdiscoverylogging.properties)

### Enable DEBUG Logging on rootCategory Logger

Set log4j.rootCategory=DEBUG, emagentlogAppender, emagenttrcAppender.

### Enable Diagnostic Logging

Set  
log4j.category.com.peoplesoft.pt.psem.toolsadmin.common.diagnostics=DEBUG,  
emagentdiagAppender.

For more information about diagnostic utility, see [PeopleSoft AMP Diagnostics Utility](#).

---

**Note:** To enable DEBUG logging for metrics and monitoring issues, enable *psemmetricslogging.properties* and to debug discovery issues enable *psemdiscoverylogging.properties*. Navigate to PSFT Discovery PLUGIN\_ROOT location - AGENT\_HOME/plugins/oracle.apps.psft.discovery.plugin\_13.2.1.1.0/config/psemdiscoverylogging.properties to modify the files.

---

## RSA Certificate Issues on WebSphere

On some operating systems running WebSphere, root certificates of type RSA are not supported and will generate errors.

### Issue

In some situations where the default signer certificate "root" from WebSphere is an RSA certificate type, you may see the following exception in the psemagent.log file during the PS Process Monitor discovery:

```
javax.net.ssl.SSLKeyException: RSA premaster secret error
```

This indicates that the agent's JDK on the specific operating system does not support RSA certificates.

### Solution

To resolve RSA certificate issues:

1. Create a self-signed certificate of type "DSA" using the keytool utility.

For example, the following command creates a custom keystore "pskey" with one self-signed DSA certificate.

```
$Agent_Home/jdk/bin/keytool -genkey -alias dsakey -keystore pskey
-keyalg DSA -sigalg SHA1withDSA -storepass password -keypass password
-storetype JKS -dname "cn=localhost"
```

In the following steps, you will import this DSA certificate into WebSphere, and make it the default signer certificate for SSL communication.

2. Login to the WebSphere administration console, and select Security, SSL certificate and key management, Key stores and certificates.
3. Create a new keystore *custompskey* and import the above DSA certificate from that "pskey" keystore into this new keystore *custompskey*.
4. Select SSL certificate and key management, SSL configurations, and create a new SSL configuration named *customSSLConfiguration*.
5. Associate the SSL configuration (customSSLConfiguration) with the keystore custompskey and the DSA key within it.
6. On the SSL certificate and key management screen click the Manage endpoint security configurations link and replace the "DefaultNodeSSLSettings" with "customSSLConfiguration" settings at the "node" scope level for both inbound and outbound routes.
7. Verify the certificate by signing on to PeopleSoft.

Sign on through the HTTPS port, and click "View Certificates" from the dialog box WebSphere presents for the certificate. It should show the DSA certificate imported in the previous steps.

8. Copy the "pskey" keystore with the DSA certificate to a directory under \$AgentHome, and set the pskey.properties file appropriately.

Discovery of Process Monitor target should be successful.

## Using the PSEMENV.SH Script for Setting Environment Variables

This section discusses using the psemenv.sh script for setting environment variables instead of the .profile.

### Issue

PeopleSoft Add-on Target Discovery and Target Management processes for UNIX and Linux environments need relevant environment variables (like PATH, LD\_LIBRARY\_PATH, TUXDIR, ORACLE\_HOME, TNS\_ADMIN etc) to be set on the host machine in the .profile file. Some environments have customized the .profile file with interactive prompts designed so for interactive login sessions. However, PeopleSoft Add-on Target Discovery and Target Management processes prefer the .profile to be non-interactive (as in, not prompting for user inputs).

### Solution

If you do not want to modify your .profile to accommodate the PeopleSoft Add-on Target Discovery and Target Management processes, PeopleTools provides an alternate mechanism to set the required environment variables. This enables you to set all the required environment variables needed for Target Discovery and Target Management in a script named psemenv.sh.

To use psemenv.sh:

1. Navigate to the *psemconfig.properties* file set *enableProfile = false*:
  - AGENT\_HOME/plugins/oracle.apps.psft.discovery.plugin\_12.1.0.2.0/config/psemconfig.properties
  - AGENT\_HOME/plugins/oracle.apps.psft.agent.plugin\_12.1.0.2.0/config/psemconfig.properties

**Note:** The enableProfile property in psemconfig.properties file is set to *true* by default, which means the PeopleSoft Add-on process will read the environment variables from the .profile file by default. You need to set the property, enableProfile, explicitly to *false* if you want the PeopleSoft Add-on process to read the environment variables from psemenv.sh script instead.

2. Create the script file named psemenv.sh under the User HOME folder or in PS\_CFG\_HOME folder.

This script file should have all the relevant environment variables necessary for PeopleSoft Add-on Target Discovery and Target Management. Alternately this script file can be created both under User HOME and PS\_CFG\_HOME folders, with some common environment variables set in the

psemenv.sh script under User HOME folder and some PeopleTools version specific environment variables set in the psemenv.sh script under PS\_CFG\_HOME folder.

---

## Mandatory Environment Variables for Discovery

The following environment variables must be included in the `.profile` or `psemenv.sh` script:

- `ORACLE_HOME=/ds1/home/oracle/Oracle/Database/product/11.2.0/dbhome_1; export ORACLE_HOME`
- `TNS_ADMIN=/ds1/home/psoft; export TNS_ADMIN`
- `TUXDIR=/ds1/home/psoft/bea/tuxedoPS2/tuxedo11gR1; export TUXDIR`
- `LD_LIBRARY_PATH=$TUXDIR/lib:$ORACLE_HOME/lib:$LD_LIBRARY_PATH; export LD_LIBRARY_PATH`
- `SHLIB_PATH=$TUXDIR/lib:$ORACLE_HOME/lib:$SHLIB_PATH; export SHLIB_PATH`
- `LIBPATH=$TUXDIR/lib:$ORACLE_HOME/lib:$LIBPATH; export LIBPATH`
- `PATH=$TUXDIR/bin:$ORACLE_HOME/bin:$PATH; export PATH`

---

## Process Monitor Target Setup Fails When Using SUDO Credentials

This section describes how to resolve sudo credential issues when setting up Process Monitor targets.

### Issue

The agent-side plug-in element is not able to get the EMHOME environment variable when it's invoked by a sudo user. This is because the "env\_reset" command in the sudo configuration file. The sudo env\_reset command in the sudoers file (`/etc/sudoers`) resets the environment to a default set of variables. After the reset, the variable EMHOME gets set to blank. The plug-in fails to discover or setup the Process Monitor due to the blank value in EMHOME.

### Solution

Remove/comment "env\_reset" command in the sudoers configuration file (`/etc/sudoers`) for sudo in the host.

---

## PeopleSoft AMP Diagnostics Utility

With the PSFT AMP diagnostics utility, you can troubleshoot issues to:

- Captures PeopleSoft AMP run-time environment.

- Capture important PeopleSoft domain configuration files to get an idea about any customization on them.
- Ascertain diagnostic hints in the diagnostic log files as to what environment related settings might be missing.
- Capture the output of any PeopleSoft admin commands.

PeopleSoft AMP has a built-in feature on EM Agent diagnosing issues related to environment set up. For more information, see [E-PSEM: Diagnostic Utility to troubleshoot issues with PeopleSoft Plug-in for Enterprise Manager \(Doc ID 1614036.1\)](#) to troubleshoot issues with PeopleSoft AMP for Enterprise Manager.

1. 2. r 3. Additionally it is recommended to set the generic logging also to "DEBUG" mode when enabling diagnostics because we can correlate actions better between generic log messages and diagnostics log messages. AGENT\_HOME/plugins/oracle.apps.psft.agent.plugin\_12.1.0.2.0/config/psemagentlogging.properties AGENT\_HOME/plugins/oracle.apps.psft.agent.plugin\_12.1.0.2.0/config/psemmetricslogging.properties AGENT\_HOME/plugins/oracle.apps.psft.discovery.plugin\_12.1.0.2.0/config/psemdiscoverylogging.properties log4j.rootCategory=DEBUG, emagentlogAppender, emagenttrcAppender Note: It would be better to turn-on diagnostics only when needed as it generates too many log messages into diagnostic log files. Also before starting to diagnose an issue, it is better to clean up all old logs from under "\$HOME/psft/pt/emplugin/log" and "\$HOME/psft/pt/emplugin/log/diag" locations. To search for Diagnostic Hints thrown by PeopleSoft AMP into the diagnostic log files - psemdiscoverydiag.trc, psemagentdiag.trc & psemmetricsdiag.trc search for the string pattern - "XXX DIAGNOSTIC HINT XXX" Note: Enabling Diagnostic utility creates a "diag" folder under the Agent logging location - \$HOME/psft/pt/emplugin/log/diag - only upon first discovery of a target. However if you are investigating diagnostics for Monitoring or Target Management issue, then you can manually create this "diag" folder - \$HOME/psft/pt/emplugin/log/diag - to avoid seeing exceptions related to this folder not being found.

## Enabling Diagnostic Logging

To enable diagnostics utility You must set the following:

1. Navigate to, AGENT\_HOME/plugins/oracle.apps.psft.agent.plugin\_12.1.0.2.0/config/psemconfig.properties and AGENT\_HOME/plugins/oracle.apps.psft.discovery.plugin\_12.1.0.2.0/config/psemconfig.properties to set enableDiagnostics=true.
2. Navigate to the following to set log4j.category.com.peoplesoft.pt.psem.toolsadmin.common.diagnostics=DEBUG, emagentdiagAppender:
  - AGENT\_HOME/plugins/oracle.apps.psft.agent.plugin\_12.1.0.2.0/config/psemagentlogging.properties
  - AGENT\_HOME/plugins/oracle.apps.psft.agent.plugin\_12.1.0.2.0/config/psemmetricslogging.properties
  - AGENT\_HOME/plugins/oracle.apps.psft.discovery.plugin\_12.1.0.2.0/config/psemdiscoverylogging.properties
3. Navigate to the following to set log4j.rootCategory=DEBUG, emagentlogAppender, emagenttrcAppender:

- AGENT\_HOME/plugins/oracle.apps.psft.agent.plugin\_12.1.0.2.0/config/psemagentlogging.properties
- AGENT\_HOME/plugins/oracle.apps.psft.agent.plugin\_12.1.0.2.0/config/psemmetricslogging.properties
- AGENT\_HOME/plugins/oracle.apps.psft.discovery.plugin\_12.1.0.2.0/config/psemdiscoverylogging.properties

## Creating WebLogic PIA Domain Issues on the AIX platform

Issues are encountered on while creating Weblogic PIA domain on AIX platform.

### Issue

Creating PIA domain on WebLogic fails because *hostname* and *chmod* could not run on the AIX platform.

### Solution

To resolve this issue, set the following **PATH** in the **PsMpPIAInstaller Setup** script:

```
PS_HOME/setup/PsMpPIAInstall/setup.sh
main()
{
PATH=/jre/prod/1.7.0/bin:/bin:/sbin:/usr/sbin:/usr/bin:/usr/local/bin:/usr/etc:/usr⇒
/ccs/bin:/usr/bin/X11:/usr/ucb:./tuxedo/prod/12.1.1.0-j12-
64bit/bin:/cobol/prod/svexp-5.1_wp6-64bit/bin:/products/oracle/11.2.0.2.0/bin; exp⇒
ort PATH
```

## Replicate PIA Issue

The replicate PIA may fail due to redundancy in classpath.

### Solution

1. Backup *PLUGIN\_ROOT*/scripts/psem/PSEM\_MASTER.pl.
2. Open *PLUGIN\_ROOT*/scripts/psem/PSEM\_Master.pl and remove the following line:

```
$ENV{'EMDROOT'} . $sep . 'lib' . $sep . 'xmlparserv2.jar' . $jarsep.
```
3. Restore the CLASSPATH to include *xmlparserv2.jar* in the *PSEM\_Master.pl* script after the replication of PIA.

## PIA Target Status Issues on Solaris and Unix Platforms

The PIA target status displays incorrect message.



## Issue

Incorrect display of the PIA target status on EM console due wrong pointing of `/bin/sh` to a wrong Unix shell.

## Solutions

Repoint the `/bin/sh` link to `/bin/bash` (Bourne Shell). It is commonly known that Bourne Shell fixes issues such as this on UNIX platform.

