

# **Oracle Utilities Meter Data Management**

Installation Guide

Release 2.2.0 Service Pack 1

**E80249-02**

April 2017  
(Updated July 2017)

## Oracle Utilities Meter Data Management Installation Guide

Copyright © 2000, 2017 Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

---

---

# Contents

<b>Preface</b> .....	<b>i</b>
Related Documents .....	i
Updates to Documentation .....	ii
Conventions .....	ii
Acronyms .....	ii
Additional Resources .....	iii
<b>Chapter 1</b>	
<b>Introduction</b> .....	<b>1-1</b>
Installation Overview .....	1-1
Application Architecture .....	1-3
Tier 1: Desktop/Client, or Presentation Tier .....	1-3
Tier 2: Web Application Server, Business Application Server, Batch Server Tier .....	1-3
Tier 3: Database, or Persistence Tier .....	1-3
Installation Components .....	1-3
Installation Types.....	1-4
Initial Installation.....	1-4
Demo Installation.....	1-4
Upgrade Installation.....	1-5
Recommendations for Creating a Production Environment .....	1-5
Documentation Packages.....	1-6
Installation Packages.....	1-6
<b>Chapter 2</b>	
<b>Supported Platforms and Hardware Requirements</b> .....	<b>2-1</b>
Software and Hardware Considerations.....	2-1
Operating Systems and Application Servers.....	2-2
Hardware and Web Browser Requirements .....	2-3
Application Server Memory Requirements.....	2-5
Support for Software Patches and Upgrades .....	2-5
<b>Chapter 3</b>	
<b>Planning the Installation</b> .....	<b>3-1</b>
Before You Install.....	3-1
Embedded vs Native/Clustered Installation .....	3-1
Native Mode in WebLogic.....	3-2
Directory Names .....	3-2
Prerequisite Software List.....	3-2
Prerequisite Software for Database Server .....	3-2
Prerequisite Software for Application Server.....	3-3

Web Browser Requirements .....	3-3
AIX 7.1 TL01+/AIX 7.2 TL00+ Application Server .....	3-3
Oracle Linux 6.5+, 7.x or Red Hat Linux 6.5+, 7.x Operating System.....	3-7
Windows Server 2012 R2 Application Server.....	3-14
Readiness Checklist .....	3-16

## Chapter 4

<b>Installing Oracle Utilities Meter Data Management - Initial Installation .....</b>	<b>4-1</b>
Before You Install.....	4-1
Initial Installation Procedure.....	4-1
Database Component Installation .....	4-1
After the Installation .....	4-10
Operating the Application.....	4-11

## Chapter 5

<b>Installing Oracle Utilities Meter Data Management - Demo Installation.....</b>	<b>5-1</b>
Before You Install.....	5-1
Demo Installation Procedure.....	5-1
Database Component Installation .....	5-1

## Chapter 6

<b>Upgrading Oracle Utilities Meter Data Management .....</b>	<b>6-1</b>
Before You Upgrade .....	6-1
Upgrade Procedure.....	6-1
Database Component Upgrade.....	6-2
Application Components Upgrade.....	6-2
Operating the Application.....	6-10

## Chapter 7

<b>Additional Tasks .....</b>	<b>7-1</b>
Importing Self-Signed Certificates .....	7-1
Customizing Configuration Files .....	7-2
Integrating Existing Customer Modifications .....	7-2
Generating the Application Viewer .....	7-3
Building Javadocs Indexes.....	7-3
Configuring the Environment for Batch Processing .....	7-4
Customizing the Logo.....	7-4
Configuring Secure Sockets Layer (SSL).....	7-4
Setting Up an Application Keystore .....	7-5
Deploying Inbound WebServices (IWS).....	7-6
Domain Templates (Linux WebLogic 12.1.3.0+, WebLogic 12.2.1.1+ only).....	7-8
Database Patching .....	7-10
BI Publisher Report Configuration.....	7-13

## Appendix A

<b>Installation Menu Functionality Overview.....</b>	<b>A-1</b>
Installation Menu Functionality Details.....	A-2
.....	A-2

---

## Appendix B

<b>Installation and Configuration Worksheets.....</b>	<b>B-1</b>
Application Framework Installation and Configuration Worksheets.....	B-1
Menu Block 1: Environment ID, Roles, Third Party Software Configuration.....	B-2
Menu Block 2: Keystore Options.....	B-2
Menu Block 50: Environment Installation Options.....	B-3
Menu Block 1: Environment Description.....	B-3
Menu Block 2: [WebLogic] Business Application Server Configuration.....	B-4
Menu Block 3: [WebLogic] Web Application Server Configuration.....	B-5
Menu Block 4 - Database Configuration.....	B-6
Menu Block 5 - General Configuration Options.....	B-6
Menu Block 6 - SSL Certificate Keystore (Weblogic Only).....	B-7
Menu Block 7 - OUAF TrustStore Options.....	B-8
Advanced Menu Options.....	B-8
Menu Block 54 - WebLogic Diagnostics.....	B-12
Menu Block 53 - OIM Configuration Settings.....	B-12
Menu Block 55 - URI, File and URL Related Options.....	B-13
WebLogic OSB Configuration.....	B-14
WebLogic SOA Configuration.....	B-15
WebLogic SOA Configuration Plan.....	B-15
Configuration for DataRaker Integration.....	B-16
Advanced Menu Options.....	B-16

## Appendix C

<b>Common Maintenance Activities .....</b>	<b>C-1</b>
--	------------

## Appendix D

<b>Installing User Documentation as a Standalone Application.....</b>	<b>D-1</b>
Installing User Documentation.....	D-1
Installing Stand-Alone Online Help.....	D-1
Customizing Help for Stand-Alone Operation.....	D-2
Installing Stand-Alone Help Under Web Server.....	D-2

## Appendix E

<b>Oracle Utilities Application Framework 4.3.0 Service Pack 4 (4.3.0.4.0) Fixes .....</b>	<b>E-1</b>
--	------------

---

---

# Preface

This guide provides an overview of installing Oracle Utilities Meter Data Management and is intended for anyone interested in the installation process. This section includes:

- [Related Documents](#)
- [Updates to Documentation](#)
- [Acronyms](#)
- [Additional Resources](#)

To complete installation you should have:

- Administrative privileges on the host where you are installing the software.
- Experience installing and configuring application servers and other software.

## Related Documents

The following documentation is included with this release.

### Installation, Configuration, and Release Notes

- *Oracle Utilities Meter Data Management Release Notes*
- *Oracle Utilities Meter Data Management Quick Install Guide*
- *Oracle Utilities Meter Data Management Installation Guide*
- *Oracle Utilities Meter Data Management Database Administrator Guide*
- *Oracle Utilities Meter Data Management Licensing Information User Manual*

### User Guides

- *Oracle Utilities Meter Data Management Business User Guide*
- *Oracle Utilities Meter Data Management Administrative User Guide*

### Supplemental Documents

- *Oracle Utilities Meter Data Management Security Guide*

## Updates to Documentation

Additional and updated information about the product is available from the **Knowledge Base** section of **My Oracle Support** (<http://support.oracle.com>). Please refer to **My Oracle Support** for more information. Documentation updates are also posted on the Oracle Technology Network documentation page as they become available ([http://docs.oracle.com/cd/E72219\\_01/documentation.html](http://docs.oracle.com/cd/E72219_01/documentation.html)).

## Conventions

The following text conventions are used in this document:

Convention	Meaning
<b>boldface</b>	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

## Acronyms

The following acronyms and terms are used in this document:

Acronym	Definition
ADF	Oracle Application Development Framework
EAR	Enterprise Archive
EJB	Enterprise JavaBeans
HTML	HyperText Markup Language
JAR	Java Archive
JDBC	Java database connectivity
JMX	Java Management Extensions
JNDI	Java Naming and Directory Interface
JSP	JavaServer Pages
JVM	Java Virtual Machine.
MPL	Multi Purpose Listener
OUAF	Oracle Utilities Application Framework
OAM	Oracle Access Manager
OIM	Oracle Identity Management

---

<b>Acronym</b>	<b>Definition</b>
ONS	Oracle Notification Service
Oracle RAC FCF	Oracle Real Application Clusters Fast Connection Failover
RMI	Remote Method Invocation
SOAP	Simple Object Access Protocol
SOA	Service-oriented architecture
SPLEBASE	The location where the application will be installed.
SPLOUTPUT	This location is used for storing batch log files and output from batch jobs
WAR	Web application Archive
WLS	WebLogic
XAIApp	XML Application Integration

## **Additional Resources**

For more information and support, visit the Oracle Support Web site at:  
<http://www.oracle.com/support/index.html>



# Chapter 1

---

## Introduction

This chapter provides an overview of the installation of Oracle Utilities Meter Data Management.


- [Installation Overview](#)
- [Application Architecture](#)
- [Installation Components](#)
- [Installation Types](#)
- [Media Pack Components](#)

## Installation Overview

Installing Oracle Utilities Meter Data Management involves the following steps:

1. Review the different tiers of the application architecture as described in the [Application Architecture](#) section of this chapter.
2. Understand the hardware requirements for installing the application and the supported platforms for the application and database servers as described in the [Supported Platforms and Hardware Requirements](#) section.  
**Note:** The installation and administration of the database server tier is described in detail in the document *Oracle Utilities Meter Data Management Database Administrator Guide*.
3. Plan your installation as described in the [Planning the Installation](#) section. This chapter includes lists of the required software for each supported combination of operating system and application server.
4. Install all required third-party software as described in the [Installing Prerequisite Software](#) section.
5. Install the database as described in the *Oracle Utilities Meter Data Management Database Administrator Guide*.
6. Install the framework for the application.
7. Install the Oracle Utilities Service and Measurement Data Foundation for the application.
8. Install Oracle Utilities Meter Data Management.
9. Follow the installation guidelines described in the [Additional Tasks](#) section.

The following diagram provides an overview of the steps that need to be taken to install and configure Oracle Utilities Meter Data Management:

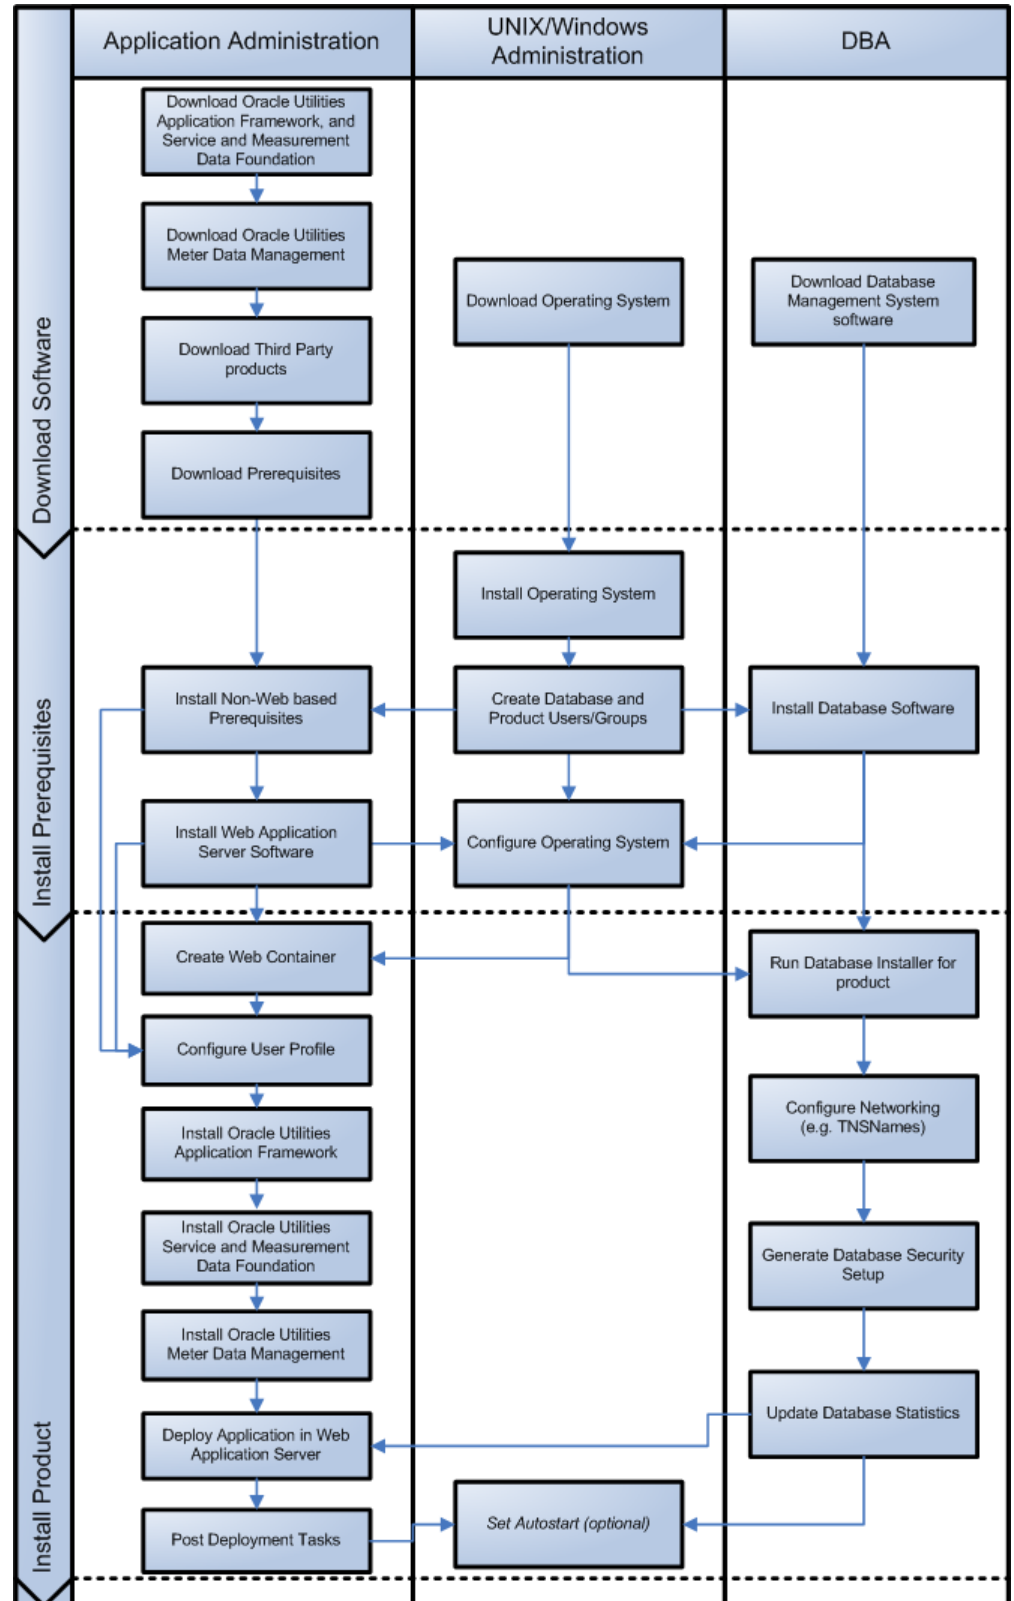

Refer to My Oracle Support for up-to-date additional information on Oracle Utilities Meter Data Management installation.

---

# Application Architecture

The Oracle Utilities Meter Data Management application is deployed on multiple tiers.

Please see the *Oracle Utilities Meter Data Management Server Administration's Guide* for a more detailed description of the application architecture and individual tiers.

## Tier 1: Desktop/Client, or Presentation Tier

This tier is implemented in a browser-based client. Users use a desktop client Web browser to log in to and use the Oracle Utilities Meter Data Management application. Note also that a desktop machine running Microsoft Windows and the Oracle client is required to perform some of the Oracle Utilities Meter Data Management product installation steps.

## Tier 2: Web Application Server, Business Application Server, Batch Server Tier

This tier is implemented in a Web application server, business application server, or the batch server. The business application component can be installed as part of the Web application server, or as a separate component. Except where explicitly noted, most of the Oracle Utilities Meter Data Management installation documentation assumes that the Web application and business application servers reside together. The batch infrastructure will also run within this tier. You can have multiple batch server instances that serve the application.

## Tier 3: Database, or Persistence Tier

This tier is implemented in a database server. The database server stores data maintained by the Oracle Utilities Meter Data Management application. More specifically, the database tier contains the data server files and database executables that physically store the tables, indexes, and other database objects for your system.

## Installation Components

The Oracle Utilities Meter Data Management product installation consists of the following components:

- Database Components
  - Oracle Utilities Application Framework database
  - Oracle Utilities Service and Measurement Data Foundation database
  - Oracle Utilities Meter Data Management database
- Application Components
  - Oracle Utilities Application Framework application
  - Oracle Utilities Service and Measurement Data Foundation application

- Oracle Utilities Meter Data Management application

For a successful installation, you must install ALL of the above components.

## Installation Types

The first step in the installation procedure is to determine the installation type that meets your business requirements. The following are the possible installation types:

- [Initial Installation](#) - A base installation, typically used for a production environment.
- [Demo Installation](#) - A base installation with pre-populated demo data, typically used for demonstration or training purposes.
- [Upgrade Installation](#) - An upgrade installation from version 2.1.0.3.0 and 2.2.0.0.0 to version 2.2.0.1.0.

Please see [Recommendations for Creating a Production Environment](#) for information about which installation type is appropriate for a production environment.

The following sections describe these installation types in detail.

### Initial Installation

This installation type is applicable when installing Oracle Utilities Meter Data Management for the first time or from scratch. For an initial install, you must install all of the following components:

- Database components  
Refer to the “Initial Install” section of the *Oracle Utilities Meter Data Management Database Administrator’s Guide* for more information.
- Application components
  - Oracle Utilities Application Framework application
  - Oracle Utilities Application Framework Single Fix Pre-Requisite Rollup for Oracle Utilities Service and Measurement Data Foundation
  - Oracle Utilities Service and Measurement Data Foundation application
  - Oracle Utilities Meter Data Management application

Refer to chapter “[Installing Oracle Utilities Meter Data Management - Initial Installation](#)” for the steps involved in installing each of the above components.

### Demo Installation

This installation type is applicable when installing a demo application of Oracle Utilities Meter Data Management for demonstration or training purposes. For a demo install, you must install all of the following components:

- Demo Database components

Refer to the “Demo Install” section of the *Oracle Utilities Meter Data Management Database Administrator’s Guide* for more information.

- Application components
  - Oracle Utilities Application Framework application
  - Oracle Utilities Application Framework Single Fix Pre-Requisite Rollup for Oracle Utilities Service and Measurement Data Foundation
  - Oracle Utilities Service and Measurement Data Foundation application
  - Oracle Utilities Meter Data Management application

Refer to chapter “[Installing Oracle Utilities Meter Data Management - Demo Installation](#)” for the steps involved in installing each of the above components.

## Upgrade Installation

This installation type is applicable when upgrading Oracle Utilities Meter Data Management from version 2.1.0.3.0 and 2.2.0.0.0 to version 2.2.0.1.0.

**Note:** If you have a version prior to 2.1.0.3.0, you must install 2.1.0.3.0 before upgrading to 2.2.0.1.0.

For an upgrade, you must upgrade all of the following components:

- Database components

Refer to the “Upgrade Install” section of the *Oracle Utilities Meter Data Management Database Administrator’s Guide* for more information.

- Application components
  - Oracle Utilities Application Framework application
  - Oracle Utilities Application Framework Single Fix Pre-Requisite Rollup for Oracle Utilities Service and Measurement Data Foundation
  - Oracle Utilities Service and Measurement Data Foundation application
  - Oracle Utilities Meter Data Management application

Refer to chapter “[Upgrading Oracle Utilities Meter Data Management](#)” for the steps involved in upgrading each of the above components.

## Recommendations for Creating a Production Environment

For a production environment, Oracle recommends that you complete the Initial Installation installation type. If there is any custom configuration that needs to be migrated from a development or “gold” environment into production, the migration can be done by using the Configuration Migration Assistant (CMA). Please refer to the appendix “Configuration Migration Assistant” in the *Oracle Utilities Meter Data Management Configuration Guide* for more details about CMA.

Oracle does not recommend creating a production environment by using the Demo Installation installation type, or by cloning an existing Demo installation.

---

# Media Pack Components

The Oracle Utilities Meter Data Management Media Pack consists of the following packages:

## Documentation Packages

- Oracle Utilities Meter Data Management V2.2.0.1.0 Quick Install Guide
- Oracle Utilities Meter Data Management V2.2.0.1.0 Release Notes
- Oracle Utilities Meter Data Management V2.2.0.1.0 Supplemental Documentation
- Oracle Utilities Meter Data Management V2.2.0.1.0 User Documentation
- Oracle Utilities Meter Data Management V2.2.0.1.0 Install Documentation
- Oracle Utilities Meter Data Management V2.2.0.1.0 User Documentation

## Installation Packages

- Oracle Utilities Meter Data Management V2.2.0.1.0 Reports
- Oracle Utilities Meter Data Management V2.2.0.1.0 Demo
- Oracle Utilities Meter Data Management V2.2.0.1.0 Multiplatform
- Oracle Fusion Middleware 12c (12.1.3.0.0) WebLogic Server and Coherence
- Oracle Fusion Middleware 12c (12.2.1.1.0) WebLogic Server and Coherence

# Chapter 2

---

## Supported Platforms and Hardware Requirements

This section gives an overview of the tiers on which the product is implemented, and shows each of the operating system/server combinations that the product is certified for. It includes:

- [Software and Hardware Considerations](#)
- [Operating Systems and Application Servers](#)
- [Hardware and Web Browser Requirements](#)
- [Application Server Memory Requirements](#)
- [Support for Software Patches and Upgrades](#)

### Software and Hardware Considerations

There are many factors that can influence software and hardware decisions. For example, your system may have to satisfy specific performance, availability, or scalability requirements, or to support running in a language other than English. These business requirements, together with the chosen system architecture, should be used in initial software and hardware planning.

Some of the questions that you should answer before beginning the installation include:

- On which hardware platform and operating system will Oracle Utilities Meter Data Management be deployed?
- On which Web server product will Oracle Utilities Meter Data Management deploy?
- On which database product will Oracle Utilities Meter Data Management deploy?
- Do you plan to deploy multiple Oracle Utilities Meter Data Management instances on the same physical server?
- How do you plan to deploy Oracle Utilities Meter Data Management?
  - Web/application/database on the same physical server
  - Web/application on one server and database on separate server
  - Each component on its own server

For detailed descriptions of various deployment architecture choices that may aid in planning, please see the document *Oracle Utilities Application Framework Architecture Guidelines*, available on My Oracle Support (Article ID 807068.1).

The final hardware and software decisions must comply with the specific requirements of Oracle Utilities Meter Data Management, as described in the rest of this chapter.

## Operating Systems and Application Servers

The table below details the MINIMUM operating system and application server combinations on which this version of Oracle Utilities Meter Data Management is supported.

Operating System and Web Browser (Client)	Operating System (Server)	Chipset	Application Server	Database
Microsoft Windows OS 7, 8.1, 10 (Internet Explorer 11, Firefox ESR 45)	AIX 7.1 TL01+	POWER	WebLogic 12.1.3.0+	Oracle
	AIX 7.2 TL00+		WebLogic 12.2.1.1+	12.1.0.1+
	Oracle Linux 6.5+, 7.x (based on Red Hat Enterprise Linux )*	x86_64	WebLogic 12.1.3.0+	Oracle
			WebLogic 12.2.1.1+	12.1.0.1+
	Oracle Solaris 11	SPARC	WebLogic 12.1.3.0+	Oracle
		WebLogic 12.2.1.1+	12.1.0.1+	
	Windows Server 2012 R2 (Not supported in production)	x86_64	WebLogic 12.1.3.0+	Oracle
			WebLogic 12.2.1.1+	12.1.0.1+

Refer to the [Product Support Matrix \(Doc ID 1454143.1\)](#) on Oracle Support to determine if support for newer versions of the listed products have been added.

Please note the following:

- Version numbers marked with a "+" are the MINIMUM version supported. That version and all future 4th digit updates will be supported.

**Example:** Oracle 12.1.0.1+ means that 12.1.0.1 and any higher 12.1.0.x versions of Oracle are supported.

\* An "x" indicates that any version of the digit designed by the "x" is supported.

**Example:** Linux 7.x indicates that any version of Linux 7 (7.0, 7.1, 7.2 etc) will be supported.

### Windows Server

- Windows Server is **not** supported for Production environments. Wherever Windows Server is referenced within this guide, it is supported for Test or Development environments **only**.

### WebLogic Server

- WebLogic Server Standard and Enterprise Edition 12.1.3.0+ are supported for both embedded and native installations. Starting at Weblogic 12.2.\*, embedded



installations will be not be supported. Only the native installation will be supported.

- WebLogic Server Enterprise Edition is required if using application clustering.
- Customers must download Oracle WebLogic Server from the Oracle Software Delivery Cloud.

### **Oracle Database Server**

The following Oracle Database Server editions are supported:

- Oracle Database Enterprise Edition
- Oracle Database Standard Edition

**Note:** Oracle Database Enterprise Edition and the Partitioning and Advanced Compression options are strongly recommended in all situations.

**Oracle VM Support**

This version of Oracle Utilities Meter Data Management is supported on Oracle VM Server for x86 for supported releases of Oracle Linux and Microsoft Windows operating systems.

Refer to My Oracle Support knowledge base article 249212.1 for Oracle's support policy on VMWare.

Hardware and Web Browser Requirements

**Client Side Hardware Requirements**

Configuration	Processor	Memory (RAM)	Monitor (Display)
Minimum	Pentium IV - 2.0 GHz	1024 MB	1024X768** 16-bit Color
Recommended*	Pentium IV -3.0+ GHz, (or) any Core 2 Duo (or) any Athlon X2	2048 MB	1280X1024** 32-bit Color

\* The Recommended configuration supports better performance of the client.

\*\* To reduce the amount of scrolling required for pages that are longer than 768 or 1024 pixels, consider placing a monitor into vertical position (with narrow side on the bottom).

**Web Browser Requirements**

The web browsers listed below are supported when used on each of the operating systems indicated:

Browsers	Windows OS
Internet Explorer 11 Firefox ESR 45	Microsoft Windows OS 7, 8.1, 10 (64-bit)

**Application Server Memory Requirements**

For each application server environment a minimum of 4 GB of real memory is required, plus 6 GB of swap space. The approximate disk space requirements in a standard installation are as follows (the size represents the MINIMUM required):

Location	Size	Usage
\$SPLBASE	minimum	This is the location where the application and framework get installed. Startup, shutdown and other online log files are stored here. The size and space that is used should be monitored because various debugging options can significantly affect the size of log files.
\$SPLAPP	minimum	This location is used for storing batch log files and output from batch jobs. The size of this space should be influenced by which batches are run and how often, and the amount of debugging information that is collected.
Location of the application web work files on the web servers	minimum	This location is used by various web server vendors to expand the application. It should be considered when installing these products. Refer to the individual web server documentation to determine the location of the temporary files.
Installation Temporary Area	4 GB	The application gets installed from this location. You need enough space to uncompress the files and install the application.
Oracle Data Area	4 GB minimum	This location is where the Oracle database data files are stored. The size of this space should be based on the requirements of the production environment. For an initial or demo database install 4 GB should be sufficient.

## Support for Software Patches and Upgrades

Due to the ongoing nature of software improvement, vendors will periodically issue patches and service packs for the operating systems, application servers and database servers on top of specific versions that Oracle products have already been tested against.

If it is necessary to apply an upgrade, please do so in a test environment that is running on the same platform as your production environment prior to updating the production environment itself. The exception to this is Hibernate software version 4.1.0. This version should not be upgraded.

Always contact Oracle Support prior to applying vendor updates that do not guarantee backward compatibility.

# Chapter 3

---

## Planning the Installation

This chapter provides information for planning an Oracle Utilities Meter Data Management installation, including:

- [Before You Install](#)
- [Prerequisite Software List](#)
- [Installing Prerequisite Software](#)
- [Readiness Checklist](#)

### Before You Install

Refer to My Oracle Support for up-to-date additional information on Oracle Utilities Meter Data Management installation.

### Embedded vs Native/Clustered Installation

By default, Oracle Utilities Application Framework uses Oracle WebLogic in embedded mode. This means the Oracle WebLogic installation is essentially pointed to the Oracle Utilities Application Framework product installation and the executables of Oracle WebLogic are only used to execute the code. This has the advantage of being simple and quick to implement with the Oracle Utilities Application Framework generating a simple configuration for Oracle WebLogic to use.

If you want to take advantage of more advanced WebLogic features such as high performance (multiple managed servers) and high availability (clustering) configuration, do not use the embedded install. Rather, use the native/clustered installation which allows you to deploy the Oracle Utilities Application Framework JEE components within Oracle WebLogic, as you would with other JEE applications.

---

## Application Server Clustering

If you are considering application server clustering, refer to the following whitepaper, available on My Oracle Support, for additional information:

- Implementing Oracle ExaLogic and/or Oracle WebLogic Clustering (Doc ID: 1334558.1)
- IBM WebSphere Clustering for Oracle Utilities Application Framework (Doc ID: 1359369.1)

Additional information about Weblogic clustering can be found at [http://docs.oracle.com/cd/E17904\\_01/web.1111/e13709/toc.htm](http://docs.oracle.com/cd/E17904_01/web.1111/e13709/toc.htm).

## Native Mode in WebLogic

If you plan on using the Oracle Utilities Application Framework in native mode within Oracle WebLogic (as opposed to embedded mode), refer to the whitepaper Native Installation Oracle Utilities Application Framework (Doc Id: 1544969.1) on My Oracle Support.

## Directory Names

Directory cannot contain whitespace characters.

## Prerequisite Software List

Before you install Oracle Utilities Meter Data Management, you must install prerequisite software.

Refer to the respective installation documentation of the software for instructions on downloading and installing.

## Prerequisite Software for Database Server

The prerequisite software for the database component of Oracle Utilities Meter Data Management is as follows:

- **Oracle Database Server 12.1.0.1+** - This is required for installing the database component of the Oracle Utilities Meter Data Management product.

Oracle Database Enterprise Edition version of the database server is supported.

**Note:** Oracle Database Enterprise Edition and the Partitioning and Advanced Compression options are strongly recommended in all situations.

## Prerequisite Software for Application Server

The prerequisite software for the application component of Oracle Utilities Meter Data Management is as follows:

- Oracle Database 12c Client
- JDK 1.8.0\_102+ (64-bit)
- Oracle WebLogic 12c (12.1.3.0+) or Oracle WebLogic 12c (12.2.1.1+)
- Hibernate 4.1.0 Final

## Web Browser Requirements

The web browsers listed below are supported when used on each of the operating systems indicated:

Browsers	Windows OS
Internet Explorer 11 Firefox ESR 45	Microsoft Windows OS 7, 8.1, 10 (64-bit)

## Installing Prerequisite Software

This section describes the software that needs to be installed for each of the supported operating system and application server combinations, including:

- [AIX 7.1 TL01+/AIX 7.2 TL00+ Application Server](#)
- [Oracle Linux 6.5+, 7.x or Red Hat Linux 6.5+, 7.x Operating System](#)
- [Oracle Solaris 11 Application Server](#)
- [Windows Server 2012 R2 Application Server](#)

### AIX 7.1 TL01+/AIX 7.2 TL00+ Application Server

This section describes the software requirements for operating the application using the AIX application server.

## Supported Application Servers

Operating System	Chipset	Application Server
AIX 7.1 TL01+/ AIX 7.2 TL00+	POWER 64-bit	Oracle WebLogic 12c (12.1.3.0+) 64-bit version or Oracle WebLogic 12c (12.2.1.1+) 64-bit version

## Web/Application Server Tier

### AIX 7.1 TL01 Operating System Running on Power5 and Power6 Architecture

#### UNIX Administrator User ID

The following user groups and accounts have to be created to install and administer the application

Description	Default Value	Customer Defined Value
Oracle Utilities Meter Data Management Administrator User ID	cissys	
Oracle Utilities Meter Data Management User Group	cisusr	

**Note:** It is recommended that you change the default values for security reasons.

Throughout this document the administrator user id is often referred to as the "cissys" user id. You should substitute that with the customer defined user id when not using the default value. After the initial install, the software should always be managed using that user id.

By default, the cissys userid is the only one given access to the installed files.

1. Create a group called cisusr (user group).
2. Create a user called cissys. and a primary group cisusr. Set the primary shell for the cissys user to Korn Shell.

The shell scripts use the ">" to overwrite shell functionality. Your operating system may be configured to not allow this functionality by default in the users shell.

To avoid file access permission problems when executing scripts, consider placing the following command into cissys profile script:

```
set +o noclobber
```

#### Security Configuration

Various options exist to secure a system. In this application all files will be created with the minimum permissions required to ensure that group-readable, group-writable and group-executable files will have the correct user groups and to restrict the permissions available to legitimate users. In this way, a low privileged end user cannot directly edit configuration files and thereby bypass application security controls.

The following users and group categories must be defined to implement this security. For demonstration purposes the following users and groups will be used. These users must be created according to industry standards (including password policies). All users should be

created with a default umask of 022 to ensure files created during normal operation have the correct permissions.

Please replace these users and groups for your installation defaults:

User	Group	Description
cissys	cisusr	This user will be used to install the application and to apply patches. This user will own all the application files. The same care should be taken with this user ID as if it is 'root'. This user will be able to add, delete and modify and files within the application.
cisadm	cisusr	Administrative and Operation functions will be available to this user. This user will be able to stop and start the application and batch processes, but will not have access to modify any file other than generated log files
cisoper	-----	Low level operator. This user will only be able to read logs files and collect information for debugging and investigative purposes. Care should be taken in production to disable debugging as debugging information could contain potential sensitive data which this user should not have privy to.

**Note:** The Oracle Client and WebLogic should be installed as the user who will stop and start the application. For example, if you plan to run the application as the install user these components must belong to cissys.

### Oracle Client 12c — Runtime Option

Install the Oracle Client as described in the Oracle Client installation documentation. Use the cissys account to install the Oracle Client. If another user installs the Oracle Client, make sure the cissys user ID has the proper execute permissions.

For the cissys user ID, ensure that the environment variable ORACLE\_CLIENT\_HOME is set up, and that ORACLE\_CLIENT\_HOME/perl/bin is the first Perl listed in the cissys account's PATH variable.

### IBM Java Software Development Kit version 8.0 SR15 64-bit, IBM SDK, Java Technology Edition, Version 8.0

Installation of Java is a prerequisite for using Oracle WebLogic as an application server.

At the time of release, AIX Java packages could be obtained from:

<http://www.ibm.com/developerworks/java/jdk/aix/service.html>

The web server requires the 64-bit Java platform in order to function. The main prerequisite for the web server is the version of Java mentioned above.

For the Administrator userid (cissys), ensure that the environment variable JAVA\_HOME is set up, and that "java" can be found in cissys' PATH variable.

### Hibernate 4.1.0 FINAL

You must install Hibernate 4.1.0 before installing Oracle Utilities Meter Data Management.



To install Hibernate 4.1.0 external jar files to the Hibernate 3rd party jars depot:

1. Create a Hibernate jar external depot:

```
export HIBERNATE_JAR_DIR=<Hibernate 3rd party jars depot>
```

2. Download the hibernate-release-4.1.0.Final.zip file from:

<http://sourceforge.net/projects/hibernate/files/hibernate4/>

3. Click the “4.1.0.Final” link to download the zip file.

4. Extract the contents of the archive file:

```
jar xvf hibernate-release-4.1.0.Final.zip
```

**Note:** You must have Java JDK installed on the machine to use the jar command. Be sure to install the JDK that is supported for your platform.

5. Copy the jar files to your Hibernate jar directory (\$HIBERNATE\_JAR\_DIR) using the following commands:

```
cp hibernate-release-4.1.0.Final/lib/optional/ehcache/ehcache-core-2.4.3.jar $HIBERNATE_JAR_DIR
cp hibernate-release-4.1.0.Final/lib/optional/ehcache/hibernate-ehcache-4.1.0.Final.jar $HIBERNATE_JAR_DIR
cp hibernate-release-4.1.0.Final/lib/required/hibernate-commons-annotations-4.0.1.Final.jar $HIBERNATE_JAR_DIR
cp hibernate-release-4.1.0.Final/lib/required/hibernate-core-4.1.0.Final.jar $HIBERNATE_JAR_DIR
cp hibernate-release-4.1.0.Final/lib/required/hibernate-jpa-2.0-api-1.0.1.Final.jar $HIBERNATE_JAR_DIR
cp hibernate-release-4.1.0.Final/lib/required/javassist-3.15.0-GA.jar $HIBERNATE_JAR_DIR
cp hibernate-release-4.1.0.Final/lib/required/jboss-transaction-api_1.1_spec-1.0.0.Final.jar $HIBERNATE_JAR_DIR
```

6. Another package needs to be downloaded in order to get the jboss-logging-3.3.0.Final.jar.

Download the hibernate-search-5.5.4.Final-dist.zip file from:

<https://sourceforge.net/projects/hibernate/files/hibernate-search/>

7. Click the “5.5.4.Final” link to download the zip file.

8. Extract the contents of the archive file:

```
jar xvf hibernate-search-5.5.4.Final-dist.zip
```

9. Copy the jboss-logging-3.3.0.Final.jar file to your Hibernate jar directory (\$HIBERNATE\_JAR\_DIR) using the following command:

```
cp hibernate-search-5.5.4.Final/dist/lib/required/jboss-logging-3.3.0.Final.jar to $HIBERNATE_JAR_DIR
```

## Oracle WebLogic 12c (12.1.3.0+) 64-bit

Oracle WebLogic software can be downloaded from the Oracle web site. This application server will run as a 64-bit application.

- Download and install 64-bit Java (as documented above) before installing WebLogic.
- Download and install WebLogic Server 12c (12.1.3.0+).

### Oracle WebLogic 12c (12.2.1.1+) 64-bit

Oracle WebLogic software can be downloaded from the Oracle web site. This application server will run as a 64-bit application.

- Download and install 64-bit Java (as documented above) before installing WebLogic.
- Download and install WebLogic Server 12c Infrastructure Installer (12.2.1.1+).

## Oracle Linux 6.5+, 7.x or Red Hat Linux 6.5+, 7.x Operating System

This section describes the software requirements for operating the application using the Oracle Linux or Red Hat Linux application server.

### Supported Application Servers

Operating System	Chipset	Application Server
Oracle Enterprise Linux 6.5+, 7.x (64-bit; based on Red Hat Enterprise Linux (64-bit))	x86_64	Oracle WebLogic 12c (12.1.3.0+) 64-bit or Oracle WebLogic 12c (12.2.1.1+) 64-bit

### Oracle Linux or Red Hat Enterprise Linux Operating System Running on x86\_64 64-bit Architecture

#### UNIX Administrator User ID

The following user groups and accounts have to be created to install and administer the application:

Description	Default Value	Customer Defined Value
Oracle Utilities Meter Data Management Administrator User ID	cissys	
Oracle Utilities Meter Data Management User Group	cisusr	

**Note:** It is recommended that you change the default values for security reasons.

Throughout this document the administrator user id is often referred to as the "cissys" user id. You should substitute that with the customer defined user id when not using the

default value. After the initial install, the software should always be managed using that user id.

By default, the cissys userid is the only one given access to the files installed.

1. Create a group called cisusr (user group)
2. Create a user called cissys. Primary group cisusr. Set the primary shell for the cissys user to Korn Shell.

The shell scripts use the ">" to overwrite shell functionality. Your operating system may be configured to not allow this functionality by default in the users shell.

To avoid file access permission problems when executing scripts, consider placing the following command into cissys profile script:

```
set +o noclobber
```

### Security Configuration

Various options exist to secure a system. In this application all files will be created with the minimum permissions required to ensure that group-readable, group-writable and group-executable files will have the correct user groups and to restrict the permissions available to legitimate users. In this way, a low privileged end user cannot directly edit configuration files and thereby bypass application security controls.

The following users and group categories must be defined to implement this security. For demonstration purposes the following users and groups will be used. These users must be created according to industry standards (including password policies). All users should be created with a default umask of 022 to ensure files created during normal operation have the correct permissions.

Please replace these users and groups for your installation defaults:

User	Group	Description
cissys	cisusr	This user will be used to install the application and to apply patches. This user will own all the application files. The same care should be taken with this user ID as if it is 'root'. This user will be able to add, delete and modify and files within the application.
cisadm	cisusr	Administrative and Operation functions will be available to this user. This user will be able to stop and start the application and batch processes, but will not have access to modify any file other than generated log files
cisoper	-----	Low level operator. This user will only be able to read logs files and collect information for debugging and investigative purposes. Care should be taken in production to disable debugging as debugging information could contain potential sensitive data which this user should not have privy to.

**Note:** The Oracle Client and WebLogic should be installed as the user who will stop and start the application. For example, if you plan to run the application as the install user these components must belong to cissys.

## Oracle Client 12c — Runtime Option

Install the Oracle Client as described in the Oracle Client installation documentation. Use the cissys account to install the Oracle Client. If another user installs the Oracle Client, make sure the cissys user ID has the proper execute permissions.

For the cissys user ID, ensure that the environment variable ORACLE\_CLIENT\_HOME is set up, and that ORACLE\_CLIENT\_HOME/perl/bin is the first Perl listed in the cissys account's PATH variable.

## Oracle Java Development Kit Version 8.0 Update 102+

At time of release, Oracle Java packages could be obtained from:

<http://www.oracle.com/technetwork/java/archive-139210.html>

The Oracle WebLogic Server requires the 64-bit version. The main prerequisite for the web server is the version of Java mentioned above.

For the userid cissys, ensure that the environment variable JAVA\_HOME is setup, and that java\_home/bin and java\_home/lib can be found in cissys' PATH variable.

**Note:** JDK 8.0 Update 102 or higher version is required for Weblogic12c (12.1.3.0+ and 12.2.1.1+).

## Hibernate 4.1.0 FINAL

You must install Hibernate 4.1.0 before installing Oracle Utilities Meter Data Management.

To install Hibernate 4.1.0 external jar files to the Hibernate 3rd party jars depot:

1. Create a Hibernate jar external depot:

```
export HIBERNATE_JAR_DIR=<Hibernate 3rd party jars depot>
```

2. Download the hibernate-release-4.1.0.Final.zip file from:

<http://sourceforge.net/projects/hibernate/files/hibernate4/>

3. Click the “4.1.0.Final” link to download the zip file.

4. Extract the contents of the archive file:

```
jar xvf hibernate-release-4.1.0.Final.zip
```

**Note:** You must have Java JDK installed on the machine to use the jar command. Be sure to install the JDK that is supported for your platform.

5. Copy the jar files to your Hibernate jar directory (\$HIBERNATE\_JAR\_DIR) using the following commands:

```
cp hibernate-release-4.1.0.Final/lib/optional/ehcache/ehcache-core-2.4.3.jar $HIBERNATE_JAR_DIR
cp hibernate-release-4.1.0.Final/lib/optional/ehcache/hibernate-ehcache-4.1.0.Final.jar $HIBERNATE_JAR_DIR
cp hibernate-release-4.1.0.Final/lib/required/hibernate-commons-annotations-4.0.1.Final.jar $HIBERNATE_JAR_DIR
cp hibernate-release-4.1.0.Final/lib/required/hibernate-core-4.1.0.Final.jar $HIBERNATE_JAR_DIR
cp hibernate-release-4.1.0.Final/lib/required/hibernate-jpa-2.0-api-1.0.1.Final.jar $HIBERNATE_JAR_DIR
cp hibernate-release-4.1.0.Final/lib/required/
```

```
javassist-3.15.0-GA.jar $HIBERNATE_JAR_DIR  
cp hibernate-release-4.1.0.Final/lib/required/  
jboss-transaction-api_1.1_spec-1.0.0.Final.jar $HIBERNATE_JAR_DIR
```

6. Another package needs to be downloaded in order to get the jboss-logging-3.3.0.Final.jar.

Download the hibernate-search-5.5.4.Final-dist.zip file from:

<https://sourceforge.net/projects/hibernate/files/hibernate-search/>

7. Click the “5.5.4.Final” link to download the zip file.

8. Extract the contents of the archive file:

```
jar xvf hibernate-search-5.5.4.Final-dist.zip
```

9. Copy the jboss-logging-3.3.0.Final.jar file to your Hibernate jar directory (\$HIBERNATE\_JAR\_DIR) using the following command:

```
cp hibernate-search-5.5.4.Final/dist/lib/required/jboss-logging-  
3.3.0.Final.jar to $HIBERNATE_JAR_DIR
```

### **Oracle WebLogic 12c (12.1.3.0+) 64-bit**

Oracle WebLogic software can be downloaded from the Oracle web site. This application server will run as a 64-bit application.

- Download and install 64-bit Java (as documented above) before installing WebLogic.
- Download and install WebLogic Server 12c (12.1.3.0+).

### **Oracle WebLogic 12c (12.2.1.1+) 64-bit**

Oracle WebLogic software can be downloaded from the Oracle web site. This application server will run as a 64-bit application.

- Download and install 64-bit Java (as documented above) before installing WebLogic.
- Download and install WebLogic Server 12c Infrastructure Installer (12.2.1.1+).

## **Oracle Solaris 11 Application Server**

This section describes the software requirements for operating the application using the Oracle Solaris 11 application server.

## Supported Application Servers

Operating System	Chipset	Application Server
Oracle Solaris 11 (64-bit)	SPARC	Oracle WebLogic 12c (12.1.3.0+) 64-bit version or Oracle WebLogic 12c (12.2.1.1+) 64-bit version

## Oracle Solaris 11 Operating System Running on SPARC-based 64-bit Architecture

### UNIX Administrator User ID

The following user groups and accounts have to be created to install and administer the application:

Description	Default Value	Customer Defined Value
Oracle Utilities Meter Data Management Administrator User ID	cissys	
Oracle Utilities Meter Data Management User Group	cisusr	

**Note:** It is recommended that you change the default values for security reasons.

Throughout this document the administrator user id is often referred to as the "cissys" user id. You should substitute that with the customer defined user id when not using the default value. After the initial install, the software should always be managed using that user id.

By default, the cissys userid is the only one given access to the files installed.

1. Create a group called cisusr (user group)
2. Create a user called cissys. Primary group cisusr. Set the primary shell for the cissys user to Korn Shell.

The shell scripts use the ">" to overwrite shell functionality. Your operating system may be configured to not allow this functionality by default in the users shell.

To avoid file access permission problems when executing scripts, consider placing the following command into cissys profile script:

```
set +o noclobber
```

### Security Configuration

Various options exist to secure a system. In this application all files will be created with the minimum permissions required to ensure that group-readable, group-writable and group-executable files will have the correct user groups and to restrict the permissions available to legitimate users. In this way, a low privileged end user cannot directly edit configuration files and thereby bypass application security controls.

The following users and group categories must be defined to implement this security. For demonstration purposes the following users and groups will be used. These users must be created according to industry standards (including password policies). All users should be

created with a default umask of 022 to ensure files created during normal operation have the correct permissions.

Please replace these users and groups for your installation defaults:

User	Group	Description
cissys	cisusr	This user will be used to install the application and to apply patches. This user will own all the application files. The same care should be taken with this user ID as if it is 'root'. This user will be able to add, delete and modify and files within the application.
cisadm	cisusr	Administrative and Operation functions will be available to this user. This user will be able to stop and start the application and batch processes, but will not have access to modify any file other than generated log files
cisoper	-----	Low level operator. This user will only be able to read logs files and collect information for debugging and investigative purposes. Care should be taken in production to disable debugging as debugging information could contain potential sensitive data which this user should not have privy to.

**Note:** The Oracle Client and WebLogic should be installed as the user who will stop and start the application. For example, if you plan to run the application as the install user these components must belong to cissys.

### Oracle Client 12c — Runtime Option

Install the Oracle Client as described in the Oracle Client installation documentation. Use the cissys account to install the Oracle Client. If another user installs the Oracle Client, make sure the cissys user ID has the proper execute permissions.

For the cissys user ID, ensure that the environment variable ORACLE\_CLIENT\_HOME is set up, and that ORACLE\_CLIENT\_HOME/perl/bin is the first Perl listed in the cissys account's PATH variable.

### Oracle Java Development Kit Version 8.0 Update 102+

This software is only required for Oracle WebLogic installations.

At the time of release, the Oracle Java packages used in the test cycle were downloaded from:

<http://www.oracle.com/technetwork/java/archive-139210.html>

The Oracle WebLogic Server requires the 64-bit version. The main prerequisite for the web server is the version of Java mentioned above.

For the userid cissys, ensure that the environment variable JAVA\_HOME is setup, and that java\_home/bin and java\_home/lib can be found in cissys' PATH variable.

**Note:** JDK 8.0 Update version 102 or higher is required for WebLogic12c (12.2.1.1+).

**Hibernate 4.1.0 FINAL**

You must install Hibernate 4.1.0 before installing Oracle Utilities Meter Data Management.

To install Hibernate 4.1.0 external jar files to the Hibernate 3rd party jars depot:

1. Create a Hibernate jar external depot:

```
export HIBERNATE_JAR_DIR=<Hibernate 3rd party jars depot>
```

2. Download the hibernate-release-4.1.0.Final.zip file from:

<http://sourceforge.net/projects/hibernate/files/hibernate4/>

3. Click the “4.1.0.Final” link to download the zip file.

4. Extract the contents of the archive file:

```
jar xvf hibernate-release-4.1.0.Final.zip
```

**Note:** You must have Java JDK installed on the machine to use the jar command. Be sure to install the JDK that is supported for your platform.

5. Copy the jar files to your Hibernate jar directory (\$HIBERNATE\_JAR\_DIR) using the following commands:

```
cp hibernate-release-4.1.0.Final/lib/optional/ehcache/ehcache-core-2.4.3.jar $HIBERNATE_JAR_DIR
cp hibernate-release-4.1.0.Final/lib/optional/ehcache/hibernate-ehcache-4.1.0.Final.jar $HIBERNATE_JAR_DIR
cp hibernate-release-4.1.0.Final/lib/required/hibernate-commons-annotations-4.0.1.Final.jar $HIBERNATE_JAR_DIR
cp hibernate-release-4.1.0.Final/lib/required/hibernate-core-4.1.0.Final.jar $HIBERNATE_JAR_DIR
cp hibernate-release-4.1.0.Final/lib/required/hibernate-jpa-2.0-api-1.0.1.Final.jar $HIBERNATE_JAR_DIR
cp hibernate-release-4.1.0.Final/lib/required/javassist-3.15.0-GA.jar $HIBERNATE_JAR_DIR
cp hibernate-release-4.1.0.Final/lib/required/jboss-transaction-api_1.1_spec-1.0.0.Final.jar $HIBERNATE_JAR_DIR
```

6. Another package needs to be downloaded in order to get the jboss-logging-3.3.0.Final.jar.

Download the hibernate-search-5.5.4.Final-dist.zip file from:

<https://sourceforge.net/projects/hibernate/files/hibernate-search/>

7. Click the “5.5.4.Final” link to download the zip file.

8. Extract the contents of the archive file:

```
jar xvf hibernate-search-5.5.4.Final-dist.zip
```

9. Copy the jboss-logging-3.3.0.Final.jar file to your Hibernate jar directory (\$HIBERNATE\_JAR\_DIR) using the following command:

```
cp hibernate-search-5.5.4.Final/dist/lib/required/jboss-logging-3.3.0.Final.jar to $HIBERNATE_JAR_DIR
```



**Oracle WebLogic 12c (12.1.3.0+) 64-bit**

Oracle WebLogic software can be downloaded from the Oracle web site. This application server will run as a 64-bit application.

- Download and install 64-bit Java (as documented above) before installing WebLogic.
- Download and install WebLogic Server 12c (12.1.3.0+).

**Oracle WebLogic 12c (12.2.1.1+) 64-bit**

Oracle WebLogic software can be downloaded from the Oracle web site. This application server will run as a 64-bit application.

- Download and install 64-bit Java (as documented above) before installing WebLogic.
- Download and install WebLogic Server 12c Infrastructure Installer (12.2.1.1+).

**Windows Server 2012 R2 Application Server**

This section describes the software requirements for operating the application using the Windows application server.

**Supported Application Servers**

Operating System	Chipset	Application Server
Windows Server 2012 R2 (64-bit)	x86_64	Oracle WebLogic 12c (12.2.1.1.0+) 64-bit version or Oracle WebLogic 12c (12.1.3.0+) 64-bit version

**Oracle Client 12c — Runtime Option**

Install the Oracle Client as described in the Oracle Client installation documentation. Use the cissys account to install the Oracle Client. If another user installs the Oracle Client, make sure the cissys user ID has the proper execute permissions.

For the cissys user ID, ensure that the environment variable ORACLE\_CLIENT\_HOME is set up, and that ORACLE\_CLIENT\_HOME/perl/bin is the first Perl listed in the cissys account's PATH variable.

**Oracle Java Development Kit Version 8.0 Update 102+**

This software is required for the Oracle WebLogic Installation.

At time of release, Oracle Java packages could be obtained from:

<http://www.oracle.com/technetwork/java/archive-139210.html>

The Oracle WebLogic Server requires the 64-bit version. The main prerequisite for the web server is the version of java mentioned above.

For the userid cissys, ensure that the environment variable JAVA\_HOME is setup, and that java\_home/bin and java\_home/lib can be found in cissys' PATH variable.

**Note:** JDK 8.0 Update version 102 or higher is required for WebLogic12c (12.1.3.0+ or 12.2.1.1.0).

### Hibernate 4.1.0 FINAL

You must install Hibernate 4.1.0 before installing Oracle Utilities Meter Data Management.

To install Hibernate 4.1.0 external jar files to the Hibernate 3rd party jars depot:

1. Create a Hibernate jar external depot:

```
export HIBERNATE_JAR_DIR=<Hibernate 3rd party jars depot>
```

2. Download the hibernate-release-4.1.0.Final.zip file from:

<http://sourceforge.net/projects/hibernate/files/hibernate4/>

3. Click the “4.1.0.Final” link to download the zip file.

4. Extract the contents of the archive file:

```
jar xvf hibernate-release-4.1.0.Final.zip
```

**Note:** You must have Java JDK installed on the machine to use the jar command. Be sure to install the JDK that is supported for your platform.

5. Copy the jar files to your Hibernate jar directory (\$HIBERNATE\_JAR\_DIR) using the following commands:

```
cp hibernate-release-4.1.0.Final/lib/optional/ehcache/ehcache-core-2.4.3.jar $HIBERNATE_JAR_DIR
cp hibernate-release-4.1.0.Final/lib/optional/ehcache/hibernate-ehcache-4.1.0.Final.jar $HIBERNATE_JAR_DIR
cp hibernate-release-4.1.0.Final/lib/required/hibernate-commons-annotations-4.0.1.Final.jar $HIBERNATE_JAR_DIR
cp hibernate-release-4.1.0.Final/lib/required/hibernate-core-4.1.0.Final.jar $HIBERNATE_JAR_DIR
cp hibernate-release-4.1.0.Final/lib/required/hibernate-jpa-2.0-api-1.0.1.Final.jar $HIBERNATE_JAR_DIR
cp hibernate-release-4.1.0.Final/lib/required/javassist-3.15.0-GA.jar $HIBERNATE_JAR_DIR
cp hibernate-release-4.1.0.Final/lib/required/jboss-transaction-api_1.1_spec-1.0.0.Final.jar $HIBERNATE_JAR_DIR
```

6. Another package needs to be downloaded in order to get the jboss-logging-3.3.0.Final.jar.

Download the hibernate-search-5.5.4.Final-dist.zip file from:

<https://sourceforge.net/projects/hibernate/files/hibernate-search/>

7. Click the “5.5.4.Final” link to download the zip file.

8. Extract the contents of the archive file:

```
jar xvf hibernate-search-5.5.4.Final-dist.zip
```

9. Copy the jboss-logging-3.3.0.Final.jar file to your Hibernate jar directory (\$HIBERNATE\_JAR\_DIR) using the following command:

```
cp hibernate-search-5.5.4.Final/dist/lib/required/jboss-logging-3.3.0.Final.jar to $HIBERNATE_JAR_DIR
```

### Oracle WebLogic 12c (12.1.3.0+) 64-bit

Oracle WebLogic software can be downloaded from the Oracle web site. This application server will run as a 64-bit application.

- Download and install 64-bit Java (as documented above) before installing WebLogic.
- Download and install WebLogic Server 12c (12.1.3.0+).

### Oracle WebLogic 12c (12.2.1.1+) 64-bit

Oracle WebLogic software can be downloaded from the Oracle web site. This application server will run as a 64-bit application.

- Download and install 64-bit Java (as documented above) before installing WebLogic.
- Download and install WebLogic Server 12c Infrastructure Installer (12.2.1.1+).

## Readiness Checklist

The following checklist guides you through the installation process of Oracle Utilities Meter Data Management. The details for each step are presented in subsequent chapters.

1. Confirm that the recommended hardware is ready. Refer to [Supported Platforms and Hardware Requirements](#) for more details.
2. Install prerequisite software. Refer to the [Prerequisite Software List](#) for more details.
3. Ensure that you have downloaded the Oracle Utilities Meter Data Management V2.2.0.1 components.
4. Go through the [Installation and Configuration Worksheets](#) to understand the configuration menu.
5. Determine the type of the installation:
  - **Initial Installation** - For initial installation follow the instructions mentioned in chapter [Installing Oracle Utilities Meter Data Management - Initial Installation](#).
  - **Demo Installation** - For demo installation follow the instructions mentioned in chapter [Installing Oracle Utilities Meter Data Management - Demo Installation](#).
  - **Upgrade Installation** - For upgrade installation to V2.2.0.1, follow the instructions mentioned in chapter [Upgrading Oracle Utilities Meter Data Management](#).
6. Perform post-installation tasks.

# Chapter 4

---

## Installing Oracle Utilities Meter Data Management - Initial Installation

This chapter provides instructions for installing Oracle Utilities Meter Data Management from scratch. This chapter includes:

- [Before You Install](#)
- [Initial Installation Procedure](#)
- [After the Installation](#)
- [Operating the Application](#)

### Before You Install

Refer to My Oracle Support for up-to-date additional information on Oracle Utilities Meter Data Management.

### Initial Installation Procedure

The initial installation procedure consists of:

- [Database Component Installation](#)
- [Application Components Installation](#)

### Database Component Installation

Installation of the database component of Oracle Utilities Meter Data Management must be complete before you can proceed with the following sections. Refer to the [Initial Install](#) section of the *Oracle Utilities Meter Data Management Database Administrator's Guide*, which provides instructions on installing the database component.

# Application Components Installation

A successful installation consists of the following steps:

- [Installing the Oracle Utilities Application Framework V4.3.0 Service Pack 4 \(4.3.0.4.0\) Application Component](#)
- [Installing Oracle Utilities Application Framework V4.3.0.4.0 Single Fix Prerequisite Rollup for SMDF V2.2.0.1.0](#)
- [Installing Oracle Utilities Service and Measurement Data Foundation V2.2.0.1.0 Application Component](#)
- [Installing the Oracle Utilities Meter Data Management V2.2.0.1.0 Application Component](#)

## Installing the Oracle Utilities Application Framework V4.3.0 Service Pack 4 (4.3.0.4.0) Application Component

This section describes how to install the application component of Oracle Utilities Application Framework V4.3.0 Service Pack 4, including:

- [Copying and Decompressing Install Media](#)
- [Setting Permissions for the cistab file in UNIX](#)
- [Installing the Application Component](#)

### Copying and Decompressing Install Media

The Oracle Utilities Application Framework V4.3.0 Service Pack 4 installation file is delivered in jar format for both UNIX and Windows platforms. If you are planning to install multiple Oracle Utilities Application Framework V4.3.0 Service Pack 4 environments operated by different Oracle Utilities administrator user ids, you must complete each of the following installation steps for each administrator userid.

To copy and decompress the install media, follow these steps:

1. Log in to the application server host with the Oracle Utilities Application Framework administrator user ID.
2. Download the Oracle Utilities Meter Data Management V2.2.0.1.0 Multiplatform.zip from Oracle Software Delivery Cloud.
3. Create a temporary directory such as c:\ouaf\temp or /ouaf/temp. (Referred to below as <TEMPDIR>.)

**Note:** This directory must be located outside any current or other working Oracle Utilities application environment. All files that are placed in this directory as a part of the installation can be deleted after completing a successful installation.

4. Unzip Oracle Utilities Meter Data Management V2.2.0.1.0 Multiplatform.zip to get the file MDM\_V2.2.0.1.0.zip from the delivered package and copy to the <TEMPDIR>. If you are using FTP to transfer this file, remember to use the BINARY option for the FTP transfer.
5. Decompress the file:

```
cd <TEMPDIR>
unzip MDM_V2.2.0.1.0.zip
cd App
```

## Setting Permissions for the cistab file in UNIX

Every Oracle Utilities Application Framework environment installed on a server must be registered in the /etc/cistab file located on that server. On UNIX servers, generally only the root user ID has write permissions to the /etc directory. Since the installation process is run by the Oracle administrator user ID (cissys), this user ID may not be able to write to /etc/cistab table.

The install utility checks permissions and if it identifies a lack of the necessary permissions, it generates a script in the ../App/FW.V4.3.0.4.0 directory named cistab\_<SPLENVIRON>.sh. Run the generated script using the root account before continuing with the installation process. The script initializes the cistab file in /etc directory (if it is the first Oracle Utilities Framework application environment on the server) and registers a new environment.

The generated script also changes the owner of /etc/cistab file to the Oracle Utilities Framework administrator user ID, so that the next time a new environment is created by the same Oracle Utilities Framework administrator user ID, you do not need to run the generated script with the root user ID. Instead the install utility itself proceeds with the registration.

If you are reinstalling an existing environment, only the validation of /etc/cistab entry is done by the install utility, no new registration occurs. The install utility interactively instructs you about every step that needs to occur in each specific case.

If you are planning to upgrade an existing environment it is your responsibility to take a backup prior to the installation process. The installation utility does not create a backup of existing environment.

## Installing the Application Component

This section outlines the steps for installing the application component of Oracle Utilities Application Framework V4.3.0.4.0.

1. Login to the Application Server host as administrator (the default is cissys on UNIX) or as a user with Administrator privileges (on Windows).
2. Change directory to ../App/FW.V4.3.0.4.0.
3. Set the ORACLE\_CLIENT\_HOME and PATH variables as Oracle Client Perl is required to run the installer.

### UNIX

```
export ORACLE_CLIENT_HOME=<ORACLE CLIENT INSTALL LOCATION>
export PERL_HOME=${ORACLE_CLIENT_HOME}/perl
export PATH=${PERL_HOME}/bin:$PATH
export PERL5LIB=${PERL_HOME}/lib:${PERL_HOME}/lib/site_perl:<OUAF
    Installer Decompressed location/bin/perl>
export PERLLIB=${PERL_HOME}/lib:${PERL_HOME}/lib/site_perl:<OUAF
    Installer Decompressed location/bin/perl>
export LD_LIBRARY_PATH=${ORACLE_CLIENT_HOME}/lib:$LD_LIBRARY_PATH
```

### Windows

```
set ORACLE_CLIENT_HOME=<ORACLE CLIENT INSTALL LOCATION>
set PERL_HOME=%ORACLE_CLIENT_HOME%\perl
set PATH=%PERL_HOME%\bin;%PATH%
```

- Start the application installation utility by executing the appropriate script:

**UNIX**

```
ksh ./install.sh
```

**Windows**

```
install.cmd
```

- The Oracle Utilities Application Framework specific menu appears.
- Follow the messages and instructions that are produced by the application installation utility.
- Select each menu item to configure the values. For detailed description of the values, refer to [Appendix B: Installation and Configuration Worksheets](#).
- Below are the mandatory list of configurable items along with descriptions for a few items. Where you see <Mandatory>, enter values suitable to your environment. You can assign default values to the rest of the menu items.

```
*****
* Environment Installation Options *
*****
1. Third Party Software Configuration
   Oracle Client Home Directory: <Mandatory>
   Web Java Home Directory:      <Mandatory>
   Child JVM Home Directory:
   COBOL Home Directory:
   Hibernate JAR Directory: <Mandatory>
   ONS JAR Directory:
   Web Application Server Home Directory: <Mandatory>
   ADF Home Directory:
   OIM OAM Enabled Environment:

2. Keystore Options
   Store Type:                      JCEKS
   Alias:                           ouaf.system
   Alias Key Algorithm:              AES
   Alias Key Size:                   128
   HMAC Alias:                       ouaf.system.hmac
   Padding:                          PKCS5Padding
   Mode:                             CBC

50. Environment Installation Options
   Environment Mount Point: <Mandatory> - Install Location
   Log Files Mount Point: <Mandatory> - ThreadPoolWorker Logs
                                   Location

   Environment Name: <Mandatory>
   Web Application Server Type:      WLS
   Install Application Viewer Module: true
```

Each item in the above list should be configured for a successful install.

Choose option (1,2,50, <P> Process, <X> Exit):

- Once you enter 'P' after entering mandatory input values in the above menu, the system populates another configuration menu.

```
*****
* Environment Configuration *
*****
1. Environment Description
```

- Environment Description: <Mandatory>
2. Business Application Server Configuration
    - Business Server Host: <Mandatory> - *Hostname on which application being installed*
    - WebLogic Server Name: myserver
    - Business Server Application Name: SPLService
    - MPL Admin Port Number: <Mandatory> - *Multipurpose Listener Port*
    - MPL Automatic startup: false
  3. Web Application Server Configuration
    - Web Server Host: <Mandatory>
    - WebLogic SSL Number: <Mandatory>
    - WebLogic Console Port Number: <Mandatory>
    - WebLogic Additional Stop Arguments:
    - Web Context Root: ouaf
    - WebLogic JNDI User ID: <Mandatory>
    - WebLogic JNDI Password: <Mandatory>
    - WebLogic Admin System User ID: <Mandatory>
    - WebLogic Admin System Password: <Mandatory>
    - WebLogic Server Name: myserver
    - Web Server Application Name: SPLWeb
    - Deploy Using Archive Files: true
    - Deploy Application Viewer Module: true
    - Enable The Unsecured Health Check Service: false
    - MDB RunAs User ID:
    - Super User Ids: SYSUSER
  4. Database Configuration
    - Application Server Database User ID: <Mandatory>
    - Application Server Database Password: <Mandatory>
    - MPL Database User ID: <Mandatory>
    - MPL Database Password: <Mandatory>
    - XAI Database User ID: <Mandatory>
    - XAI Database Password: <Mandatory>
    - Batch Database User ID: <Mandatory>
    - Batch Database Password: <Mandatory>
    - Web JDBC DataSource Name: <Mandatory>
    - JDBC Database User ID: <Mandatory>
    - JDBC Database Password: <Mandatory>
    - Database Name: <Mandatory>
    - Database Server: <Mandatory>
    - Database Port: <Mandatory>
    - ONS Server Configuration: <Mandatory>
    - Database Override Connection String: <Mandatory>
    - Character Based Database: <Mandatory>
    - Oracle Client Character Set NLS\_LANG: AMERICAN\_AMERICA.AL32UTF8
  5. General Configuration Options
    - Batch RMI Port: <Mandatory> - *RMI port for batch*
    - RMI Port number for JMX Business:
    - RMI Port number for JMX Web:
    - JMX Enablement System User ID:
    - JMX Enablement System Password:
    - Coherence Cluster Name: <Mandatory> - *Unique name for batch*
    - Coherence Cluster Address: <Mandatory> - *Unique Multicast address*
    - Coherence Cluster Port: <Mandatory> - *Unique port for batch cluster*



```

Coherence Cluster Mode:                <Mandatory> - prod

6. SSL Certificate Keystore
Certificate Keystore Type:              CUSTOM
Identify Keystore File:
Identify Keystore File Type:           jks
Identify Keystore Password:
Identity Private Key Alias:
Trust Keystore File:
Trust Keystore File Type:              jks
Trust Keystore Password:
Trust Private Key Alias:

7. OUAF TrustStore Options
Import TrustStore Directory:
Store Type:                            JCEKS
Alias:                                  ouaf.system
Alias Key Algorithm:                   AES
Alias Key Size:                        128
HMAC Alias:                            ouaf.system.hmac
Padding:                               PKCS5Padding
Mode:                                   CBC

```

Each item in the above list should be configured for a successful install.

Choose option (1,2,3,4,5,6,7, <P> Process, <X> Exit):

10. When you are done with the parameter setup, proceed with the option P. The utility writes the configured parameters and their values into the configuration file.
11. Once the install has finished, the installation log location appears on the screen. If the log does not list any error messages, the installation of the application component of Oracle Utilities Application Framework is complete. You can now install Oracle Utilities Service and Measurement Data Foundation as described in the following section.

### Installing Oracle Utilities Application Framework V4.3.0.4.0 Single Fix Prerequisite Rollup for SMDF V2.2.0.1.0

1. Navigate to ../App/FW43040\_Rollup.
2. Refer to the Readme.txt inside 'FW43040\_Rollup' file for instructions on installing the Oracle Utilities Application Framework V4.3.0.4.0 Prerequisite Single Fixes.

These patches are also available for download separately from My Oracle Support.

See [Appendix E](#) for a list of the patches contained in the rollup.

### Installing Oracle Utilities Service and Measurement Data Foundation V2.2.0.1.0 Application Component

This section describes how to install the application component of Oracle Utilities Service and Measurement Data Foundation, including:

- [Copying and Decompressing Install Media](#)
- [Installing Oracle Utilities Service and Measurement Data Foundation V2.2.0.1.0](#)

- [Configuration of Oracle Fusion Middleware Components on a Separate Server from Oracle Utilities Service and Measurement Data Foundation](#)

### **Copying and Decompressing Install Media**

The installation file is delivered in jar format for both UNIX and Windows platforms.

The Oracle Utilities Service and Measurement Data Foundation is delivered as a separate installation package. Please refer to the [Supported Platforms and Hardware Requirements](#) chapter for installation details regarding the database and operating system versions supported for the Service and Measurement Data Foundation. Also see the section [Installing Prerequisite Software](#) for prerequisite third-party software installation instructions.

Download the installation package and proceed as follows:

1. Log in to the host server as the Oracle Utilities Application Framework administrator user ID (default cissys). This is the same user ID that was used to install the Oracle Utilities Application Framework.
2. Navigate to ../App/SMDF.V2.2.0.1.0.

### **Installing Oracle Utilities Service and Measurement Data Foundation V2.2.0.1**

This section outlines the steps for installing the Service and Measurement Data Foundation:

#### **Preparing for the Installation**

1. Log on as Oracle Utilities Service and Measurement Data Foundation Administrator (default cissys).
2. Initialize the Framework environment that you want to install the product into.

#### **UNIX**

```
$SPLEBASE/bin/splenvron.sh -e $SPLENVIRON
```

#### **Windows**

```
%SPLEBASE%\bin\splenvron.cmd -e %SPLENVIRON%
```

3. Stop the environment if running.

#### **UNIX**

```
$SPLEBASE/bin/spl.sh stop
```

#### **Windows**

```
%SPLEBASE%\bin\spl.cmd stop
```

#### **Installing the Application**

1. Execute the script:

#### **UNIX**

```
ksh ./install.sh
```

**Windows**

```
install.cmd
```

**Note:** On UNIX, ensure that you have the proper execute permission on install.sh

The configuration menu for the Oracle Utilities Service and Measurement Data Foundation Application appears.

2. Select menu item 8 to configure OSB.

Use the completed OSB configuration worksheet to assist you in this step. See the [Service and Measurement Data Foundation Installation and Configuration Worksheets](#).

3. Select menu item 9 to configure SOA.

Use the completed SOA configuration worksheet to assist you in this step. See the [Service and Measurement Data Foundation Installation and Configuration Worksheets](#).

4. Select menu item 10 to configure the SOA Configuration Plan.

Use the completed SOA Configuration Plan (MDF) worksheet to assist you in this step. See the [Installation and Configuration Worksheets](#).

5. When you are done with the parameter setup, choose option P to proceed with the installation.

Installation of Oracle Utilities Service and Measurement Data Foundation Application Server is complete if no errors occurred during installation.

### **Configuration of Oracle Fusion Middleware Components on a Separate Server from Oracle Utilities Service and Measurement Data Foundation**

This section applies to an Oracle Utilities Smart Grid Gateway configuration in which Oracle Service Bus (OSB) or Oracle SOA Suite is installed on a separate host from the Oracle Utilities Application Framework's host. In this configuration, the Oracle Utilities installation scripts must have access to the libraries in the OSB and SOA servers' directories to deploy OSB projects and SOA composites successfully.

Follow these procedures to configure access to a remote OSB server:

- Create a network share to the osb folder within the Middleware Home on the remote OSB server.
- Provide the following values for Menu Item 8 (OSB Configuration) during the installation for Oracle Utilities Service and Measurement Data Foundation:

**Note:** Use the completed OSB configuration worksheet to assist you in this step. See the [Installation and Configuration Worksheets](#).

- **OSB Home** is the location of the osb folder, accessed by way of network share.
- **OSB Host Server** is the host name of the OSB server.
- **OSB Port Number** is the port of the OSB admin server.
- **OSB SSL Port Number** is the port of the OSB SSL admin server.

Follow these procedures to configure access to a remote SOA Suite server:

- Create a network share to the soa folder within the Middleware Home on the remote SOA Suite server.

- Provide the following values for Menu Item 9 (SOA Configuration) during the installation for Oracle Utilities Service and Measurement Data Foundation.

**Note:** Use the completed SOA configuration worksheet to assist you in this step. See the [Installation and Configuration Worksheets](#).

- **SOA Home** is the location of the soa folder, accessed by way of network share.
- **SOA Host Server** is the host name of the SOA managed server.
- **SOA Port Number** is the port of the SOA managed server.
- **SOA SSL Port Number** is the port of the SOA SSL managed server.

## Installing the Oracle Utilities Meter Data Management V2.2.0.1.0 Application Component

This section describes how to install the application component of Oracle Utilities Meter Data Management, including:

- [Installation Prerequisite](#)
- [Copying and Decompressing Install Media](#)
- [Installing the Application Component](#)

To proceed with the Oracle Utilities Meter Data Management installation you need to be connected to the target Oracle Utilities Service and Measurement Data Foundation application environment. See the detailed installation instructions in the following section.

You must initialize the Service and Measurement Data Foundation environment. For detailed instructions see the Preparing for the Installation section.

### Installation Prerequisite

Oracle Utilities Service and Measurement Data Foundation 2.2.0.1 must be installed prior to installing Oracle Utilities Meter Data Management 2.2.0.1.

### Copying and Decompressing Install Media

The Oracle Utilities Meter Data Management installation file is delivered in jar format for both UNIX and Windows platforms.

To copy and decompress the install media, follow these steps:

Log in to the application server host as the Oracle Utilities Application Framework administrator user ID (default cissys). This is the same user ID that was used to install the Oracle Utilities Application Framework.

### Installing the Application Component

Follow the steps below to install Oracle Utilities Meter Data Management application component:

1. Log in to the application server host as Oracle Utilities Meter Data Management Administrator (default cissys).

2. Change directory:

```
cd <install_dir>/bin
```

where <install\_dir> is the location where the Oracle Utilities Service and Measurement Data Foundation application component is installed.

3. Initialize the environment by running the appropriate command:

#### UNIX

```
./splenviron.sh -e <ENV NAME>
```

#### Windows

```
splenviron.cmd -e <ENV NAME>
```

4. If the environment is running, stop it by running the appropriate command:

#### UNIX

```
./spl.sh stop
```

#### Windows

```
spl.cmd stop
```

5. Navigate to .. <TEMPDIR>/MDM.V2.2.0.1.0 directory.

6. Execute the install script:

**Note:** On UNIX, ensure that you have the proper execute permission on install.sh.

#### UNIX

```
ksh ./install.sh
```

#### Windows

```
install.cmd
```

Choose option **P** to proceed with the installation (you don't need to change anything).

Installation of the Oracle Utilities Meter Data Management Server is complete if no errors occurred during the installation.

7. Start up the environment. Run the following command:

#### UNIX

```
spl.sh start
```

#### Windows

```
spl.cmd start
```

Follow the message on the screen and review the logs in \$SPLSYSTEMLOGS directory to ensure that the environment was started successfully.

If the startup failed, identify the problem by reviewing the logs. Resolve any issues before attempting to restart the environment.

**Note:** The first time you start Oracle Utilities Meter Data Management, you need to log into the WebLogic console and give system access to cisusers role. The WebLogic console application can be accessed through the following URL: <http://<hostname>:<portname>/console>.

## After the Installation

After completing the installation, verify the following:

1. Verify installation logs created under decompressed installer location for any errors.
2. Confirm installation logs do not contain any errors.
3. Confirm all the configurations are correct. Refer to [Appendix B: Installation and Configuration Worksheets](#) for details.
4. Confirm that the database is ready.
5. Start the application server. For instructions, refer to [Appendix C: Common Maintenance Activities](#).
6. To operate the application, refer to the following section.

## Operating the Application

At this point your installation and custom integration process is complete. Be sure to read the *Oracle Utilities Meter Data Management Server Administrator's Guide* for more information on further configuring and operating the system.

# Chapter 5

---

## Installing Oracle Utilities Meter Data Management - Demo Installation

This chapter provides instructions for setting up a demo application of Oracle Utilities Meter Data Management useful for demonstration or training purposes. It includes:

- [Before You Install](#)
- [Demo Installation Procedure](#)

### Before You Install

Refer to My Oracle Support for up-to-date additional information on Oracle Utilities Meter Data Management.

### Demo Installation Procedure

The demo installation procedure consists of:

- [Database Component Installation](#)
- [Application Components Installation](#)

### Database Component Installation

Installation of the database component of Oracle Utilities Meter Data Management must be complete before you can proceed with the following sections. Refer to the section “**Demo Install**” of the *Oracle Utilities Meter Data Management Database Administrator’s Guide*, which provides instructions on installing the database component with pre-populated demo data.

# Application Components Installation

A successful installation consists of the following steps:

- [Installing the Oracle Utilities Application Framework V4.3.0 Service Pack 4 \(4.3.0.4.0\) Application Component](#)
- [Installing Oracle Utilities Application Framework V4.3.0.4.0 Single Fix Prerequisite Rollup for SMDF V2.2.0.1.0](#)
- [Installing Oracle Utilities Service and Measurement Data Foundation V2.2.0.1.0 Application Component](#)
- [Installing the Oracle Utilities Meter Data Management V2.2.0.1.0 Application Component](#)

## Installing the Oracle Utilities Application Framework V4.3.0 Service Pack 4 (4.3.0.4.0) Application Component

This section describes how to install the application component of Oracle Utilities Application Framework V4.3.0 Service Pack 4, including:

- [Copying and Decompressing Install Media](#)
- [Setting Permissions for the cistab file in UNIX](#)
- [Installing the Application Component](#)

### Copying and Decompressing Install Media

The Oracle Utilities Application Framework V4.3.0 Service Pack 4 installation file is delivered in jar format for both UNIX and Windows platforms. If you are planning to install multiple Oracle Utilities Application Framework V4.3.0 Service Pack 4 environments operated by different Oracle Utilities administrator user ids, you must complete each of the following installation steps for each administrator userid.

To copy and decompress the install media, follow these steps:

1. Log in to the application server host with the Oracle Utilities Application Framework administrator user ID.
2. Download the Oracle Utilities Meter Data Management V2.2.0.1.0 Multiplatform.zip from Oracle Software Delivery Cloud.
3. Create a temporary directory such as c:\ouaf\temp or /ouaf/temp. (Referred to below as <TEMPDIR>.)

**Note:** This directory must be located outside any current or other working Oracle Utilities application environment. All files that are placed in this directory as a part of the installation can be deleted after completing a successful installation.

4. Unzip Oracle Utilities Meter Data Management V2.2.0.1.0 Multiplatform.zip to get the file MDM\_V2.2.0.1.0.zip from the delivered package and copy to the <TEMPDIR>. If you are using FTP to transfer this file, remember to use the BINARY option for the FTP transfer.
5. Decompress the file:

```
cd <TEMPDIR>
unzip MDM_V2.2.0.1.0.zip
cd App
```



## Setting Permissions for the cistab file in UNIX

Every Oracle Utilities Application Framework environment installed on a server must be registered in the /etc/cistab file located on that server. On UNIX servers, generally only the root user ID has write permissions to the /etc directory. Since the installation process is run by the Oracle administrator user ID (cissys), this user ID may not be able to write to /etc/cistab table.

The install utility checks permissions and if it identifies a lack of the necessary permissions, it generates a script in the ../App/FW.V4.3.0.4.0 directory named cistab\_<SPLENVIRON>.sh. Run the generated script using the root account before continuing with the installation process. The script initializes the cistab file in /etc directory (if it is the first Oracle Utilities Framework application environment on the server) and registers a new environment.

The generated script also changes the owner of /etc/cistab file to the Oracle Utilities Framework administrator user ID, so that the next time a new environment is created by the same Oracle Utilities Framework administrator user ID, you do not need to run the generated script with the root user ID. Instead the install utility itself proceeds with the registration.

If you are reinstalling an existing environment, only the validation of /etc/cistab entry is done by the install utility, no new registration occurs. The install utility interactively instructs you about every step that needs to occur in each specific case.

If you are planning to upgrade an existing environment it is your responsibility to take a backup prior to the installation process. The installation utility does not create a backup of existing environment.

## Installing the Application Component

This section outlines the steps for installing the application component of Oracle Utilities Application Framework V4.3.0.4.0.

1. Login to the Application Server host as administrator (the default is cissys on UNIX) or as a user with Administrator privileges (on Windows).
2. Change directory to the ../App/FW.V4.3.0.4.0 directory.
3. Set the ORACLE\_CLIENT\_HOME and PATH variables as Oracle Client Perl is required to run the installer.

### UNIX:

```
export ORACLE_CLIENT_HOME=<ORACLE CLIENT INSTALL LOCATION>
export PERL_HOME=${ORACLE_CLIENT_HOME}/perl
export PATH=${PERL_HOME}/bin:$PATH
export PERL5LIB=${PERL_HOME}/lib:${PERL_HOME}/lib/site_perl:<OUAF
    Installer Decompressed location/bin/perl>
export PERLLIB=${PERL_HOME}/lib:${PERL_HOME}/lib/site_perl:<OUAF
    Installer Decompressed location/bin/perl>
export LD_LIBRARY_PATH=${ORACLE_CLIENT_HOME}/lib:$LD_LIBRARY_PATH
```

### Windows:

```
set ORACLE_CLIENT_HOME=<ORACLE CLIENT INSTALL LOCATION>
set PERL_HOME=%ORACLE_CLIENT_HOME%\perl
set PATH=%PERL_HOME%\bin;%PATH%
```

- Start the application installation utility by executing the appropriate script:

**UNIX:**

```
ksh ./install.sh
```

**Windows:**

```
install.cmd
```

- The Oracle Utilities Application Framework specific menu appears.
- Follow the messages and instructions that are produced by the application installation utility.
- Select each menu item to configure the values. For detailed description of the values, refer to [Appendix B: Installation and Configuration Worksheets](#).
- Below are the mandatory list of configurable items along with descriptions for a few items. Where you see <Mandatory>, enter values suitable to your environment. You can assign default values to the rest of the menu items.

```
*****
* Environment Installation Options *
*****
1. Third Party Software Configuration
   Oracle Client Home Directory: <Mandatory>
   Web Java Home Directory:      <Mandatory>
   Child JVM Home Directory:
   COBOL Home Directory:
   Hibernate JAR Directory: <Mandatory>
   ONS JAR Directory:
   Web Application Server Home Directory: <Mandatory>
   ADF Home Directory:
   OIM OAM Enabled Environment:

2. Keystore Options
   Store Type:                    JCEKS
   Alias:                         ouaf.system
   Alias Key Algorithm:           AES
   Alias Key Size:                128
   HMAC Alias:                    ouaf.system.hmac
   Padding:                       PKCS5Padding
   Mode:                          CBC

50. Environment Installation Options
   Environment Mount Point: <Mandatory> - Install Location
   Log Files Mount Point: <Mandatory> - ThreadPoolWorker Logs Location

   Environment Name: <Mandatory>
   Web Application Server Type:    WLS
   Install Application Viewer Module: true
```

Each item in the above list should be configured for a successful install.

Choose option (1,2,50, <P> Process, <X> Exit):

- Once you enter 'P' after entering mandatory input values in the above menu, the system populates another configuration menu.

```
*****
* Environment Configuration *
*****
1. Environment Description
   Environment Description:    <Mandatory>
```

## 2. Business Application Server Configuration

```

Business Server Host:      <Mandatory> - Hostname on which
                             application being installed
WebLogic Server Name:     myserver
Business Server Application Name: SPLService
MPL Admin Port Number:    <Mandatory> - Multipurpose Listener
                             Port

MPL Automatic startup:    false

```

## 3. Web Application Server Configuration

```

Web Server Host:          <Mandatory>
WebLogic SSL Number:      <Mandatory>
WebLogic Console Port Number: <Mandatory>
WebLogic Additional Stop Arguments:
Web Context Root:         ouaf
WebLogic JNDI User ID:    <Mandatory>
WebLogic JNDI Password:  <Mandatory>
WebLogic Admin System User ID: <Mandatory>
WebLogic Admin System Password: <Mandatory>
WebLogic Server Name:     myserver
Web Server Application Name: SPLWeb
Deploy Using Archive Files:                true
Deploy Application Viewer Module:          true
Enable The Unsecured Health Check Service: false
MDB RunAs User ID:
Super User Ids:                          SYSUSER

```

## 4. Database Configuration

```

Application Server Database User ID: <Mandatory>
Application Server Database Password: <Mandatory>
MPL Database User ID:                <Mandatory>
MPL Database Password:               <Mandatory>
XAI Database User ID:                <Mandatory>
XAI Database Password:               <Mandatory>
Batch Database User ID:               <Mandatory>
Batch Database Password:              <Mandatory>
Web JDBC DataSource Name: <Mandatory>
JDBC Database User ID: <Mandatory>
JDBC Database Password: <Mandatory>
Database Name:                       <Mandatory>
Database Server:                      <Mandatory>
Database Port:                        <Mandatory>
ONS Server Configuration: <Mandatory>
Database Override Connection String: <Mandatory>
Character Based Database: <Mandatory>
Oracle Client Character Set NLS_LANG: AMERICAN_AMERICA.AL32UTF8

```

## 5. General Configuration Options

```

Batch RMI Port:                <Mandatory> - RMI port
                                     for batch

RMI Port number for JMX Business:
RMI Port number for JMX Web:
JMX Enablement System User ID:
JMX Enablement System Password:
Coherence Cluster Name:        <Mandatory> - Unique
                                     name for batch
Coherence Cluster Address:     <Mandatory> - Unique
                                     Multicast address
Coherence Cluster Port:        <Mandatory> - Unique
                                     port for batch cluster
Coherence Cluster Mode:        <Mandatory> - prod

```

6. SSL Certificate Keystore
- |                              |        |
|------------------------------|--------|
| Certificate Keystore Type:   | CUSTOM |
| Identify Keystore File:      |        |
| Identify Keystore File Type: | jks    |
| Identify Keystore Password:  |        |
| Identity Private Key Alias:  |        |
| Trust Keystore File:         |        |
| Trust Keystore File Type:    | jks    |
| Trust Keystore Password:     |        |
| Trust Private Key Alias:     |        |
7. OUAF TrustStore Options
- |                              |                  |
|------------------------------|------------------|
| Import TrustStore Directory: |                  |
| Store Type:                  | JCEKS            |
| Alias:                       | ouaf.system      |
| Alias Key Algorithm:         | AES              |
| Alias Key Size:              | 128              |
| HMAC Alias:                  | ouaf.system.hmac |
| Padding:                     | PKCS5Padding     |
| Mode:                        | CBC              |

Each item in the above list should be configured for a successful install.

Choose option (1,2,3,4,5,6,7, <P> Process, <X> Exit):

10. When you are done with the parameter setup, proceed with the option P. The utility writes the configured parameters and their values into the configuration file.
11. Once the install has finished, the installation log location appears on the screen. If the log does not list any error messages, the installation of the application component of Oracle Utilities Application Framework is complete. You can now install Oracle Utilities Service and Measurement Data Foundation as described in the following section.

### Installing Oracle Utilities Application Framework V4.3.0.4.0 Single Fix Prerequisite Rollup for SMDf V2.2.0.1.0

1. Navigate to ../App/FW43040\_Rollup.
2. Refer to the Readme.txt inside 'FW43040\_Rollup' file for instructions on installing the Oracle Utilities Application Framework V4.3.0.4.0 Prerequisite Single Fixes.

These patches are also available for download separately from My Oracle Support.

See [Appendix E](#) for a list of the patches contained in the rollup.

### Installing Oracle Utilities Service and Measurement Data Foundation V2.2.0.1.0 Application Component

This section describes how to install the application component of Oracle Utilities Service and Measurement Data Foundation, including:

- [Copying and Decompressing Install Media](#)
- [Installing Oracle Utilities Service and Measurement Data Foundation V2.2.0.1](#)

## Copying and Decompressing Install Media

The installation file is delivered in jar format for both UNIX and Windows platforms.

The Oracle Utilities Service and Measurement Data Foundation is delivered as a separate installation package. Please refer to the chapter Supported Platforms and Hardware Requirements for installation details regarding the database and operating system versions supported for the Service and Measurement Data Foundation. Also see the section Installing Application Server Prerequisite Software for prerequisite third-party software installation instructions.

1. Log in to the application server as the Oracle Utilities Application Framework administrator user ID (default cissys). This is the same user ID that was used to install the Oracle Utilities Application Framework.
2. Navigate to ../App/SMDF.V2.2.0.1.0.

## Installing Oracle Utilities Service and Measurement Data Foundation V2.2.0.1

This section outlines the steps for installing the Service and Measurement Data Foundation.

### Preparing for the Installation

1. Log on as Oracle Utilities Service and Measurement Data Foundation Administrator (default cissys).
2. Initialize the Framework environment that you want to install the product into.

#### UNIX

```
$SPLEBASE/bin/splenviron.sh -e $SPLENVIRON
```

#### Windows

```
%SPLEBASE%\bin\splenviron.cmd -e %SPLENVIRON%
```

3. Stop the environment if running.

#### UNIX

```
$SPLEBASE/bin/spl.sh stop
```

#### Windows

```
%SPLEBASE%\bin\spl.cmd stop
```

### Installing the Application

1. Execute the script:

#### UNIX

```
ksh ./install.sh
```

#### Windows

```
install.cmd
```

**Note:** On UNIX, ensure that you have the proper execute permission on install.sh

The Configuration menu for the Oracle Utilities Service and Measurement Data Foundation Application appears.

2. Select menu item 8 to configure OSB.  
Use the completed OSB configuration worksheet to assist you in this step. See the [Appendix B: Installation and Configuration Worksheets](#).
3. Select menu item 9 to configure SOA.  
Use the completed SOA configuration worksheet to assist you in this step. See the [Appendix B: Installation and Configuration Worksheets](#).
4. Select menu item 10 to configure the SMDF SOA Configuration Plan.  
Use the completed SOA Configuration Plan (SMDF) worksheet to assist you in this step. See the [Appendix B: Installation and Configuration Worksheets](#).
5. When you are done with the parameter setup, choose option P to proceed with the installation.

Installation of Oracle Utilities Service and Measurement Data Foundation Application Server is complete if no errors occurred during installation.

## Installing the Oracle Utilities Meter Data Management V2.2.0.1.0 Application Component

This section describes how to install the application component of Oracle Utilities Meter Data Management, including:

- [Installation Prerequisite](#)
- [Copying and Decompressing Install Media](#)
- [Installing the Application Component](#)

To proceed with the Oracle Utilities Meter Data Management installation you need to be connected to the target Oracle Utilities Service and Measurement Data Foundation application environment. See the detailed installation instructions in the following section.

You *must* initialize the Service and Measurement Data Foundation environment. For detailed instructions see the Preparing for the Installation section.

### Installation Prerequisite

The Oracle Utilities Service and Measurement Data Foundation 2.2.0.1.0 application must be installed prior to installing Oracle Utilities Meter Data Management 2.2.0.1.0.

### Copying and Decompressing Install Media

The Oracle Utilities Meter Data Management installation file is delivered in jar format for both UNIX and Windows platforms.

Download the installation package and proceed as follows:

1. Log in to the application server host as the Oracle Utilities Application Framework administrator user ID (default cissys). This is the same user ID that was used to install the Oracle Utilities Application Framework.
2. Navigate to ../App/MDM.V2.2.0.1.0.

### Preparing for the Installation

1. Log on as Oracle Utilities Service and Measurement Data Foundation Administrator (default cissys).

2. Initialize the Framework environment that you want to install the product into.

**UNIX**

```
$SPLEBASE/bin/splenviron.sh -e $SPLENVIRON
```

**Windows**

```
%SPLEBASE%\bin\splenviron.cmd -e %SPLENVIRON%
```

3. Stop the environment if running.

**UNIX**

```
$SPLEBASE/bin/spl.sh stop
```

**Windows**

```
%SPLEBASE%\bin\spl.cmd stop
```

**Installing the Application Component**

1. Execute the install script:

**Note:** On UNIX, ensure that you have the proper execute permission on install.sh.

**UNIX**

```
ksh ./install.sh
```

**Windows**

```
install.cmd
```

Choose option **P** to proceed with the installation.

Installation of Oracle Utilities Oracle Utilities Meter Data Management Server is complete if no errors occurred during the installation.

2. Start up the environment. Run the following command:

**UNIX**

```
spl.sh start
```

**Windows**

```
spl.cmd start
```

Follow the message on the screen and review the logs in \$SPLSYSTEMLOGS directory to ensure that the environment was started successfully.

If the startup failed, identify the problem by reviewing the logs. Resolve any issues before attempting to restart the environment.

**Note:** The first time you start Oracle Utilities Meter Data Management, you need to log into the WebLogic console and give system access to cisusers role. The WebLogic console application can be accessed through the following URL: <http://<hostname>:<portname>/console>.

# Chapter 6

---

## Upgrading Oracle Utilities Meter Data Management

This release supports the following upgrade paths:

- Oracle Utilities Meter Data Management version 2.1.0.3.0 or 2.2.0.0.0 to version 2.2.0.1.0.

**Note:** If you have a version prior to 2.1.0.3.0, you must install 2.1.0.3.0 before upgrading to 2.2.0.1.0.

This chapter includes:

- [Before You Upgrade](#)
- [Upgrade Procedure](#)
- [Operating the Application](#)

### Before You Upgrade

Review the list of operating system, application server and database server combinations that this version of Oracle Utilities Meter Data Management is certified to operate on, in the [Chapter 2: Supported Platforms and Hardware Requirements](#).

For further assistance, contact My Oracle Support before you upgrade.

**Note:** If you are upgrading a previously installed application server, it is recommended that you make a backup before you start the upgrade procedure. The upgrade installation will remove your existing environment including your configurations.

### Upgrade Procedure

The upgrade installation procedure consists of:

- [Database Component Upgrade](#)
- [Application Components Upgrade](#)



## Database Component Upgrade

Upgrade of the database component of Oracle Utilities Meter Data Management must be complete before you can proceed with the following sections. Refer to the section “**Upgrade Install**” of the *Oracle Utilities Meter Data Management Database Administrator’s Guide*, which provides instructions on upgrading the database component.

## Application Components Upgrade

A successful upgrade consists of the following steps:

- [Upgrading the Oracle Utilities Application Framework V4.3.0 Service Pack 4 \(4.3.0.4.0.0\) Application Component](#)
- [Installing Oracle Utilities Application Framework V4.3.0.4.0 Single Fix Prerequisite Rollup for SMDf V2.2.0.1.0](#)
- [Upgrading the Oracle Utilities Service and Measurement Data Foundation Application Component to V2.2.0.1.0](#)
- [Upgrading the Oracle Utilities Meter Data Management Application Component to V2.2.0.1.0](#)

### Upgrading the Oracle Utilities Application Framework V4.3.0 Service Pack 4 (4.3.0.4.0.0) Application Component

This section describes how to upgrade the application component of Oracle Utilities Application Framework, including:

- [Copying and Decompressing Install Media](#)
- [Setting Permissions for the cistab file in UNIX](#)
- [Upgrading the Application Component](#)

#### Copying and Decompressing Install Media

The Oracle Utilities Application Framework V4.3.0 Service Pack 4 installation file is delivered in jar format for both UNIX and Windows platforms. If you are planning to install multiple Oracle Utilities Application Framework environments operated by different Oracle Utilities administrator user ids, you must complete each of the following installation steps for each administrator userid.

To copy and decompress the install media, follow these steps:

1. Log in to the application server host with the Oracle Utilities Application Framework administrator user ID.
2. Download the Oracle Utilities Meter Data Management V2.2.0.1.0 Multiplatform.zip from Oracle Software Delivery Cloud.
3. Create a temporary directory such as c:\ouaf\temp or /ouaf/temp. (Referred to below as <TEMPDIR>.)

**Note:** This directory must be located outside any current or other working Oracle Utilities application environment. All files that are placed in this directory as a part of the installation can be deleted after completing a successful installation.

4. Unzip the file Oracle Utilities Meter Data Management V2.2.0.1.0 Multiplatform.zip to get the MDM\_V2.2.0.1.0.zip from the delivered package to the <TEMPDIR>. If you are using FTP to transfer this file, remember to use the BINARY option for the FTP transfer.

5. Decompress the file:

```
cd <TEMPDIR>
unzip MDM_V2.2.0.1.0.zip
cd App
```

### Setting Permissions for the cistab file in UNIX

Every Oracle Utilities Application Framework environment installed on a server must be registered in the /etc/cistab file located on that server. On UNIX servers, generally only the root user ID has write permissions to the /etc directory. Since the installation process is run by the Oracle administrator user ID (cissys), this user ID may not be able to write to /etc/cistab table.

The install utility checks permissions and if it identifies a lack of the necessary permissions, it generates a script in the ../App/FW.V4.3.0.4.0 directory named cistab\_<SPLENVIRON>.sh. Run the generated script using the root account before continuing with the installation process. The script initializes the cistab file in /etc directory (if it is the first Oracle Utilities Framework application environment on the server) and registers a new environment.

The generated script also changes the owner of /etc/cistab file to the Oracle Utilities Framework administrator user ID, so that the next time a new environment is created by the same Oracle Utilities Framework administrator user ID, you do not need to run the generated script with the root user ID. Instead the install utility itself proceeds with the registration.

If you are reinstalling an existing environment, only the validation of /etc/cistab entry is done by the install utility, no new registration occurs. The install utility interactively instructs you about every step that needs to occur in each specific case.

If you are planning to upgrade an existing environment it is your responsibility to take a backup prior to the upgrade process. The installation utility does not create a backup of existing environment.

### Upgrading the Application Component

This section outlines the steps for installing the application component of Oracle Utilities Application Framework V4.3.0.4.0.

**Note:** Customers who have a version prior to 2.1.0.3.0 must install 2.1.0.3.0 before upgrading to 2.2.0.1.0.

1. Login to the Application Server host as administrator (the default is cissys on UNIX) or as a user with Administrator privileges (on Windows).
2. Change directory to the bin folder.

```
cd <install_dir>/bin
```

where <install\_dir> is the location where the Oracle Utilities Service and Measurement Data Foundation Base application component is installed.

- Initialize the environment by running the appropriate command:

**UNIX**

```
./splenviron.sh -e <ENV NAME>
```

**Windows**

```
splenviron.cmd -e <ENV NAME>
```

- Stop the environment, if running:

**UNIX**

```
$SPLEBASE/bin/spl.sh stop
```

**Windows**

```
%SPLEBASE%\bin\spl.cmd stop
```

- Change directory to ../App/FW.V4.3.0.4.0.

**NOTE:** While installing the FW V4.3.0.4.0 from the previous environment to V2.2.0.1.0, the install utility removes the existing environment and re-creates the environment. Take a backup before you proceed with installing FW V4.3.0.4.0 to retain any configurations for future reference.

- Start the application installation utility by executing the appropriate script:

**UNIX:**

```
ksh ./install.sh
```

**Windows:**

```
install.cmd
```

- The Oracle Utilities Application Framework specific menu appears.
- Follow the messages and instructions that are produced by the application installation utility.
- Select each menu item to configure the values. For detailed description of the values, refer to [Appendix B: Installation and Configuration Worksheets](#).
- The following is the mandatory list of configurable items with descriptions for a few items. Where you see <Mandatory>, enter values suitable to your environment. You can assign default values to the rest of the menu items.

```
*****
```

```
* Environment Installation Options *
```

```
*****
```

- Third Party Software Configuration

```
Oracle Client Home Directory: <Mandatory>
```

```
Web Java Home Directory: <Mandatory>
```

```
Child JVM Home Directory:
```

```
COBOL Home Directory:
```

```
Hibernate JAR Directory: <Mandatory>
```

```
ONS JAR Directory:
```

```
Web Application Server Home Directory: <Mandatory>
```

```
ADF Home Directory:
```

```
OIM OAM Enabled Environment:
```

```

2. Keystore Options
  Store Type:                JCEKS
  Alias:                     ouaf.system
  Alias Key Algorithm:       AES
  Alias Key Size:           128
  HMAC Alias:                ouaf.system.hmac
  Padding:                   PKCS5Padding
  Mode:                      CBC

```

```

50. Environment Installation Options
  Environment Mount Point: <Mandatory> - Install Location
  Log Files Mount Point:<Mandatory> - ThreadPoolWorker Logs
                               Location

  Environment Name:<Mandatory>
  Web Application Server Type:                WLS
  Install Application Viewer Module:         true

```

Each item in the above list should be configured for a successful install.

Choose option (1,2,50, <P> Process, <X> Exit):

11. Once you enter 'P' after entering mandatory input values in the above menu, the system populates another configuration menu.

```

*****
* Environment Configuration *
*****
1. Environment Description
  Environment Description:    <Mandatory>

2. Business Application Server Configuration
  Business Server Host:      <Mandatory> - Hostname on which
                               application being installed

  WebLogic Server Name:     myserver
  Business Server Application Name: SPLService
  MPL Admin Port Number:    <Mandatory> - Multipurpose Listener
                               Port

  MPL Automatic startup:    false

3. Web Application Server Configuration
  Web Server Host:          <Mandatory>
  WebLogic SSL Number:      <Mandatory>
  WebLogic Console Port Number: <Mandatory>
  WebLogic Additional Stop Arguments:
  Web Context Root:        ouaf
  WebLogic JNDI User ID:    <Mandatory>
  WebLogic JNDI Password:  <Mandatory>
  WebLogic Admin System User ID: <Mandatory>
  WebLogic Admin System Password: <Mandatory>
  WebLogic Server Name:    myserver
  Web Server Application Name: SPLWeb
  Deploy Using Archive Files:                true
  Deploy Application Viewer Module:          true
  Enable The Unsecured Health Check Service: false
  MDB RunAs User ID:
  Super User Ids:                            SYSUSER

4. Database Configuration
  Application Server Database User ID:  <Mandatory>
  Application Server Database Password: <Mandatory>
  MPL Database User ID:                 <Mandatory>

```

```

MPL Database Password: <Mandatory>
XAI Database User ID: <Mandatory>
XAI Database Password: <Mandatory>
Batch Database User ID: <Mandatory>
Batch Database Password: <Mandatory>
Web JDBC DataSource Name: <Mandatory>
JDBC Database User ID: <Mandatory>
JDBC Database Password: <Mandatory>
Database Name: <Mandatory>
Database Server: <Mandatory>
Database Port: <Mandatory>
ONS Server Configuration: <Mandatory>
Database Override Connection String: <Mandatory>
Character Based Database: <Mandatory>
Oracle Client Character Set NLS_LANG: AMERICAN_AMERICA.AL32UTF8

```

#### 5. General Configuration Options

```

Batch RMI Port: <Mandatory> - RMI port
                                     for batch

RMI Port number for JMX Business:
RMI Port number for JMX Web:
JMX Enablement System User ID:
JMX Enablement System Password:
Coherence Cluster Name: <Mandatory> - Unique
                                     name for batch
Coherence Cluster Address: <Mandatory> - Unique
                                     Multicast address
Coherence Cluster Port: <Mandatory> - Unique
                                     port for batch cluster
Coherence Cluster Mode: <Mandatory> - prod

```

#### 6. SSL Certificate Keystore

```

Certificate Keystore Type: CUSTOM
Identify Keystore File:
Identify Keystore File Type: jks
Identify Keystore Password:
Identity Private Key Alias:
Trust Keystore File:
Trust Keystore File Type: jks
Trust Keystore Password:
Trust Private Key Alias:

```

#### 7. OUAF TrustStore Options

```

Import TrustStore Directory:
Store Type: JCEKS
Alias: ouaf.system
Alias Key Algorithm: AES
Alias Key Size: 128
HMAC Alias: ouaf.system.hmac
Padding: PKCS5Padding
Mode: CBC

```

Each item in the above list should be configured for a successful install.

Choose option (1,2,3,4,5,6,7, <P> Process, <X> Exit):

12. When you are done with the parameter setup, proceed with the option P. The utility writes the configured parameters and their values into the configuration file.

Once the install has finished, the installation log location appears on the screen. If the log does not list any error messages, the installation of the application component of Oracle Utilities Application Framework is complete. You can now install Oracle Utilities Service and Measurement Data Foundation as described in the following section.

### Installing Oracle Utilities Application Framework V4.3.0.4.0 Single Fix Prerequisite Rollup for SMDF V2.2.0.1.0

1. Navigate to ../App/FW43040\_Rollup.
2. Refer to the Readme.txt inside 'Application-Server-Multiplatform' file for instructions on installing the Oracle Utilities Application Framework 4.3.0 Service Pack 4 Prerequisite Single Fixes.

These patches are also available for download separately from My Oracle Support.

See [Appendix E](#) for a list of the patches contained in the rollup.

### Upgrading the Oracle Utilities Service and Measurement Data Foundation Application Component to V2.2.0.1.0

This section describes how to upgrade the application component of Oracle Utilities Service and Measurement Data Foundation, including:

- [Copying and Decompressing Install Media](#)
- [Upgrading the Application Component](#)

#### Copying and Decompressing Install Media

The Oracle Utilities Service and Measurement Data Foundation file is delivered in jar format for both UNIX and Windows platforms. If you are planning to install multiple Oracle Utilities Application Framework environments operated by different Oracle Utilities Administrator user ids, you must complete each of the following installation steps for each Administrator userid.

1. Log in to the application server as the Oracle Utilities Application Framework administrator user ID (default cissys). This is the same user ID that was used to install the Oracle Utilities Application Framework.
2. Navigate to the ../App/SMDF.V2.2.0.1.0 directory.

#### Upgrading the Application Component

Follow the steps below to install the application component of Oracle Utilities Service and Measurement Data Foundation:

1. Log on as Oracle Utilities Service and Measurement Data Foundation Administrator (default cissys).
2. Initialize the Framework environment that you want to install the product into.

##### UNIX:

```
$SPLBASE/bin/splenvron.sh -e $SPLENVIRON
```

##### Windows:

```
%SPLBASE%\bin\splenvron.cmd -e %SPLENVIRON%
```

3. Stop the environment if it is running.

**UNIX:**

```
$SPLEBASE/bin/spl.sh stop
```

**Windows:**

```
%SPLEBASE%\bin\spl.cmd stop
```

**Installing the Application**

1. Execute the script:

**UNIX:**

```
ksh ./install.sh
```

**Windows:**

```
install.cmd
```

**Note:** On UNIX, ensure that you have the proper execute permission on `install.sh`

The configuration menu for the Oracle Utilities Service and Measurement Data Foundation Application appears.

2. Select menu item 8 to configure OSB.

Use the completed OSB configuration worksheet to assist you in this step. See the [Appendix B: Installation and Configuration Worksheets](#).

3. Select menu item 9 to configure SOA.

Use the completed SOA configuration worksheet to assist you in this step. See the [Appendix B: Installation and Configuration Worksheets](#).

4. Select menu item 10 to configure the SOA Configuration Plan.

Use the completed SOA Configuration Plan (MDF) worksheet to assist you in this step. See the [Appendix B: Installation and Configuration Worksheets](#).

When you are done with the parameter setup, choose option P to proceed with the installation.

Installation of Oracle Utilities Service and Measurement Data Foundation Application Server is complete if no errors occurred during installation.

## Upgrading the Oracle Utilities Meter Data Management Application Component to V2.2.0.1.0

This section describes how to install the application component of Oracle Utilities Meter Data Management, including:

- [Copying and Decompressing Install Media](#)
- [Upgrading the Application Component](#)

### Copying and Decompressing Install Media

The Oracle Utilities Meter Data Management installation file is delivered in jar format for both UNIX and Windows platforms.

To copy and decompress the install media, follow these steps:

1. Log in to the application server host as the Oracle Utilities Application Framework administrator user ID (default cissys). This is the same user ID that was used to install the Oracle Utilities Application Framework.
2. Navigate to ../App/MDM.V2.2.0.1.0 directory.

### Upgrading the Application Component

Follow the steps below to install Oracle Utilities Meter Data Management application component:

1. Log in to the application server host as Oracle Utilities Meter Data Management Administrator (default cissys).
2. Change directory:

```
cd <install_dir>/bin
```

where <install\_dir> is the location where the Oracle Utilities Service and Measurement Data Foundation application component is installed.

3. Initialize the environment by running the appropriate command:

#### UNIX

```
./splenviron.sh -e <ENV NAME>
```

#### Windows

```
splenviron.cmd -e <ENV NAME>
```

4. If the environment is running, stop it by running the appropriate command:

#### UNIX

```
./spl.sh stop
```

#### Windows

```
spl.cmd stop
```

5. Execute the install script:

**Note:** On UNIX, ensure that you have the proper execute permission on install.sh.

#### UNIX

```
ksh ./install.sh
```

#### Windows

```
install.cmd
```

Choose option **P** to proceed with the installation.

Installation of Oracle Utilities Oracle Utilities Meter Data Management Server is complete if no errors occurred during the installation.

6. Start up the environment. Run the following command:

#### UNIX

```
spl.sh start
```



## Windows

```
spl.cmd start
```

Follow the message on the screen and review the logs in `$SPLSYSTEMLOGS` directory to ensure that the environment was started successfully.

If the startup failed, identify the problem by reviewing the logs. Resolve any issues before attempting to restart the environment.

**Note:** The first time you start Oracle Utilities Meter Data Management, you need to log into the WebLogic console and give system access to `cisusers` role. The WebLogic console application can be accessed through the following URL: `http://<hostname>:<portname>/console`.

## After the Upgrade

After you complete the upgrade installation, verify the following:

1. Verify installation logs created under decompressed installer location for any errors.
2. Confirm installation logs do not contain any errors.
3. Confirm all the configurations are correct. Refer to [Appendix B: Installation and Configuration Worksheets](#) for details.
4. Confirm that the database is ready.
5. Start the application server. For instructions, refer to [Appendix C: Common Maintenance Activities](#).
6. To operate the application, refer to the [Operating the Application](#) section.

# Operating the Application

At this point your installation and custom integration process is complete. Be sure to read the *Oracle Utilities Meter Data Management Server Administration Guide* for more information on further configuring and operating the system.

# Chapter 7

---

## Additional Tasks

This section describes tasks that should be completed after installing Oracle Utilities Meter Data Management, including:

- [Importing Self-Signed Certificates](#)
- [Customizing Configuration Files](#)
- [Integrating Existing Customer Modifications](#)
- [Generating the Application Viewer](#)
- [Building Javadocs Indexes](#)
- [Configuring the Environment for Batch Processing](#)
- [Customizing the Logo](#)
- [Configuring Secure Sockets Layer \(SSL\)](#)
- [Setting Up an Application Keystore](#)
- [Deploying Inbound WebServices \(IWS\)](#)
- [Domain Templates \(Linux WebLogic 12.1.3.0+, WebLogic 12.2.1.1+ only\)](#)
- [Database Patching](#)
- [BI Publisher Report Configuration](#)

## Importing Self-Signed Certificates

If you are using self-signed certificates and the Inbound Web Services (IWS) feature, then it is necessary to import these certificates into the OUAF truststore file.

Perform the following commands:

1. Start WebLogic.
2. Initialize a command shell and setup the environment by running the following:

### UNIX

```
$$PLEBASE/bin/splenviron.sh -e $$SPLENVIRON
```

For example:

```
/ouaf/TEST_ENVIRON1/bin/splenviron.sh -e TEST_ENVIRON1
```

**Windows**

```
%SPLEBASE%\bin\splenviron.cmd -e %SPLENVIRON%
```

For example:

```
D:\ouaf\TEST_ENVIRON1\bin\splenviron.cmd -e TEST_ENVIRON1
```

3. Execute the following script to generate all information:

**UNIX**

```
$$PLEBASE/bin/initialSetup.sh -i
```

**Windows**

```
%SPLEBASE%\bin\ initialSetup.cmd -i
```

**Note:** This needs to be performed before deploying the IWS application.

## Customizing Configuration Files

If you wish to make customer modifications to various configuration files, create a ‘CM copy’ of the template file or a user exit. This preserves your changes whenever initialSetup is executed; otherwise, your changes to the delivered template files will be lost if it is patched in the future:

For example, to customize hibernate properties of the SPLWeb web application, perform the following:

1. Locate the hibernate.properties.template in the \$\$PLEBASE/templates directory
2. Copy the file to cm.hibernate.properties.template.
3. Apply your changes to cm.hibernate.properties.template.
4. Update application war file with the latest changes by executing the following command:

**UNIX**

```
$$PLEBASE/bin/initialSetup.sh
```

**Windows**

```
%SPLEBASE%\bin\initialSetup.cmd
```

Refer to the Oracle Utilities Application Framework SDK documentation for more details.

## Integrating Existing Customer Modifications

Existing Customer Modifications (CM) applied to an application server on an earlier release cannot be applied directly to a later version. CM code needs to be applied from an SDK version compatible with this release.

Refer to SDK documentation for more information about migrating CM code.

## Generating the Application Viewer

You may extend application viewer capabilities within an environment by generating additional items. These include information about algorithm types, algorithms, maintenance objects and data dictionary information. The Javadoc indexes are also rebuilt.

To generate the additional items in the application viewer, perform the following:

1. Shut down the environment.
2. Initialize a command shell and setup the environment by running the following:

### UNIX

```
$SPLEBASE/bin/splenvron.sh -e $SPLENVIRON
```

For example:

```
/ouaf/TEST_ENVIRON1/bin/splenvron.sh -e TEST_ENVIRON1
```

### Windows

```
%SPLEBASE%\bin\splenvron.cmd -e %SPLENVIRON%
```

For example:

```
D:\ouaf\TEST_ENVIRON1\bin\splenvron.cmd -e TEST_ENVIRON1
```

3. Execute the following script to generate all information.

### UNIX

```
ksh $SPLEBASE/bin/genappvieweritems.sh
```

### Windows:

```
%SPLEBASE%\bin\genappvieweritems.cmd
```

4. Restart your application.

## Building Javadocs Indexes

Rebuilding Javadoc indexes is already part of generating application viewer above. However, there are times when you need to run it separately. For example, this is required after customer modifications (CM) have been applied to an environment when it includes Java code.

Perform the following to rebuild the Javadoc indexes.

### Windows

```
%SPLEBASE%\bin\buildJavadocsIndex.cmd
```

### UNIX

```
ksh $SPLEBASE/bin/buildJavadocsIndex.sh
```

# Configuring the Environment for Batch Processing

See the *Server Administration Guide* for information on configuring the environment for batch processing.

## Customizing the Logo

To replace the Oracle Utilities logo on the main menu with another image, put the new image <customer\_logo\_file>.png file into the directory \$SPLBASE/etc/conf/root/cm and create a new “External” Navigation Key called CM\_logoImage. To do that, run the Oracle Utilities application from the browser with the parameters: http://<hostname>:<port>/cis.jsp?utilities=true&tools=true.

From the Admin menu, select Navigation Key.

Add the above Navigation Key with its corresponding URL Override path.

The syntax for the URL path is:

### Windows:

http://<host name>:<port>/<Web Context>/cm/<customer\_logo\_file>.png

### UNIX:

http://<host name>:<port>/<Web Context>/cm/<customer\_logo\_file>.png

The root directory may be deployed in war file format for runtime environment (SPLApp.war). Use provided utilities to incorporate your cm directory into SPLApp.war file.

## Configuring Secure Sockets Layer (SSL)

Secure Sockets Layer (SSL) provides secure connections by allowing two applications connecting over a network to authenticate each other's identity and by encrypting the data exchanged between the applications. Authentication allows a server, and optionally a client, to verify the identity of the application on the other end of a network connection. Encryption makes data transmitted over the network intelligible only to the intended recipient.

Follow these steps to configure Secure Sockets Layer:

1. Obtain an identity (private key and digital certificates) and trust (certificates of trusted certificate authorities) for WebLogic Server.

Use the digital certificates, private keys, and trusted CA certificates provided by the WebLogic Server, the CertGen utility, the keytool utility, or a reputable vendor such as Entrust or Verisign to perform this step.

2. Store the identity and trust.

Private keys and trusted CA certificates which specify identity and trust are stored in keystores.

3. Configure the identity and trust keystores for WebLogic Server in the WebLogic Server Administration Console.

See “Configure keystores” in the Oracle WebLogic Server Administration Console Online Help.

For additional information on configuring keystores, refer to <http://docs.oracle.com/middleware/1213/wls/WLACH/taskhelp/security/ConfigureKeystoresAndSSL.html>

4. Set SSL configuration options for the private key alias and password in the WebLogic Server Administration Console.

Optionally, set configuration options that require the presentation of client certificates (for two-way SSL).

For additional information, refer to the following topics:

- Servers: Configuration: SSL (<http://docs.oracle.com/middleware/1213/wls/WLACH/pagehelp/Corecoreserverserverconfigslltitle.html>)
- Configure two-way SSL (<http://docs.oracle.com/middleware/1213/wls/WLACH/taskhelp/security/ConfigureTwoWaySSL.html>)
- Obtaining and Storing Certificates for Production Environments ([http://docs.oracle.com/middleware/1213/wls/SECMG/identity\\_trust.htm#SECMG798](http://docs.oracle.com/middleware/1213/wls/SECMG/identity_trust.htm#SECMG798))
- Configuring Keystores with WebLogic Server ([http://docs.oracle.com/middleware/1213/wls/SECMG/identity\\_trust.htm#SECMG383](http://docs.oracle.com/middleware/1213/wls/SECMG/identity_trust.htm#SECMG383))

**Note:** Depending on your choice of implementation you may need to change some configuration files. These files are managed by templates and will be overwritten if the procedures documented in “Customizing Configuration Files” are not followed.

The identity and trust keystore files and other SSL certificate related options are configured using the `configureEnv.sh|cmd` utility.

## Setting Up an Application Keystore

This section describes how to set up a keystore in your system. The keystore is used for functionality such as digital signatures for document numbers, and encryption for credit card security.

Note that this is different from the Oracle Utilities Application Framework (also called the system) keystore and the WebLogic SSL keystores.

For additional information about document numbers, digital signatures, and encryption, see the online help.

For additional information about using the Java `keytool` utility, see the following section of the Oracle Java SE documentation:

<http://docs.oracle.com/javase/7/docs/technotes/tools/solaris/keytool.html>

Follow this procedure to set up the keystore in your environment:

1. Generate the keystore. The following command creates the file `".mykeystore"` in directory `${SPLEBASE}`:

```
keytool -genkeypair -alias <keyalias> -keyalg RSA -sigalg
SHA256withRSA -keystore ${SPLEBASE}/<filename> -keysize 1024
-storetype JCEKS -dname "CN=<name>, OU=<unit>, O=<organization>,
C=<country>" -validity 365
```

For example:

```
keytool -genkeypair -alias ouaf.application -keyalg RSA -sigalg
SHA256withRSA -keystore ${SPLEBASE}/.mykeystore -keysize 1024
-storetype JCEKS -dname "CN=Mark Jones, OU=TUGBU, O=Oracle, C=US"
-validity 365
```

The utility will prompt you for the keystore and key passwords. Make sure that they are the same.

2. Configure the following template files by adding the following entries:

**For WebLogic Server:**

- To enable in WebLogic, edit the following in `${SPLEBASE}/templates/startWeblogic.sh.template`:

```
JAVA_OPTIONS="$JAVA_OPTIONS
-Dcom.oracle.ouaf.keystore.file=${SPLEBASE}/<filename>"
```

```
JAVA_OPTIONS="$JAVA_OPTIONS
-Dcom.oracle.ouaf.keystore.password=<keystore_password>"
```

For `<keystore_password>`, use the same password entered in the keytool utility.

- To enable this in batch, edit the `threadpoolworker.properties.template`:

```
com.oracle.ouaf.keystore.file=@force_forward_slash(SPLEBASE)
@/
.mykeystore
com.oracle.ouaf.keystore.password=<keystore_password>
```

**Note:** Because the path needs to be passed with forward slashes even on Windows platforms, the `force_forward_slash` function will convert any `"\"` to `"/`.

For `<keystore_password>`, use the same password entered in the keytool utility.

List of `spl.properties` templates (located in `${SPLEBASE}/templates/` folder):

- `spl.properties.iws.template`
  - `spl.properties.template`
  - `spl.properties.service.template`
  - `spl.properties.XAIApp.template`
  - `spl.properties.standalone.template`
3. Re-initialize the environment to propagate these changes by executing the `initialSetup.sh/cmd`.
  4. Restart the environment.

## Deploying Inbound WebServices (IWS)

All existing XAI Inbound Services have been duplicated as Inbound Web Services as the application moves toward deprecation of XAI and full transition to IWS in the next release. The duplicated services are designed to work seamlessly in this release, and

customers providing custom services are encouraged to migrate to IWS to take full advantage of the new, more efficient Web service technology.

For more information on migrating from XAI to IWS, please refer to Migrating from XAI to IWS Oracle Utilities Application Framework (Doc ID 1644914.1) on My Oracle Support.

**Note:** This is an optional step for customers using IWS instead of XAI services.

For deploying IWS, please follow the steps below:

### For UNIX

1. Enable the Web Services Functionality as shown below:

- a. `cd $SPLEBASE/bin`
- b. Execute `configureEnv.sh -a`

Select option 50 and set the option “Enable Web Services Functionality” to true. Enter "P" to process.

2. Execute `initialSetup.sh` as shown below:

```
cd $SPLEBASE/bin
ksh ./initialSetup.sh
```

3. Set the classpath as shown below:

```
$ CLASSPATH=$WL_HOME/server/lib/weblogic.jar:$CLASSPATH
$ export CLASSPATH
$ cd $SPLEBASE/bin
```

4. Execute the following command:

```
$ java weblogic.Admin -username <username> -password <password>
STOREUSERCONFIG -userconfigfile $SPLEBASE/etc/.wlsuserconfig -
userkeyfile $SPLEBASE/etc/.wlsuserkey
```

Select y

5. Execute the below step in `$SPLEBASE/bin`. Please note that the application server should be up before running the below command.

```
ksh ./iwsdeploy.sh
```

### For WINDOWS

1. Enable the Web Services Functionality as shown below:

```
cd %SPLEBASE%\bin
```

2. Execute `configureEnv.cmd -a`

Select option 50 and set the option “Enable Web Services Functionality” to true. Enter "P" to process.

3. Execute `initialSetup.cmd` as shown below:

```
cd %SPLEBASE%\bin initialSetup.cmd
```

4. Set the classpath as shown below:

```
set CLASSPATH=%WL_HOME%\server\lib\weblogic.jar;%CLASSPATH%
```



- Execute the following command:

```
java weblogic.Admin -username system -password ouafadmin
STOREUSERCONFIG -userconfigfile %SPLEBASE%\etc\wlsuserconfig -
userkeyfile %SPLEBASE%\etc\wlsuserkey

Select y
```

- Execute the below step in %SPLEBASE%\bin.

Please note that the application server should be up before running the below command.

```
iwsdeploy.cmd
```

## Domain Templates (Linux WebLogic 12.1.3.0+, WebLogic 12.2.1.1+ only)

The intended use of the domain templates is for native/clustered installation of the Oracle Utilities Application Framework (OUAF) environment into a WebLogic domain. The domain template(s) defines the core set of resources within a WebLogic domain, including an Administration Server along with the basic configuration information for a Oracle Utilities Application Framework based application. The domain template is a “snapshot” of the delivered embedded “splapp” domain. When working with domain templates you will need to manage the application (stopping, starting, deployment, undeployment) utilizing the WebLogic delivered utilities.

- Install and configure application stack (OUAF and Edge Product)
  - Note:** Environment will need to be configuring to deploy in ear format.
- Review domain templates (Simple /Complex)
- Execute config.sh and enter the path of the domain template file
- Configure domain
- Complete domain configuration
  - Note:** Configure nodemanager.properties and setDomainEnv.sh
- Update SPLEBASE (ENVIRON.INI)

### Detailed Description

The product installation includes a two predefined WebLogic Server Domain templates. The delivered domain templates are located under the SPLEBASE:

```
$SPLEBASE/tools/domaintemplates
```

- Oracle-Utilities-Simple-Linux-12.1.3.0.0.jar
- Oracle-Utilities-Complex-Linux-12.1.3.0.0.jar
- Oracle-Utilities-Simple-Unix-12.2.1.1.0.jar

The Simple Domain Template is for use with one machine and does not include a WebLogic cluster, this domain configuration is similar to current delivered embedded splapp domain, with the exception that there will be two WebLogic servers (utilities\_server1 and a “Admin Server”).

The Complex Domain Template is configured for use with a pre-configured WebLogic cluster, with one machine configured, node manager settings, and one managed server configured.

The delivered domain templates defines the full set of resources within an Oracle Utilities Application Framework domain including:

- Demo certificates (the demo certificates will need to be updated for production use)
- Setting of XML Registry Settings
- Setting of Default users and groups
- Machine configuration
- Default Users and Groups

**Note:** The Users and Groups match the delivered values delivered with the embedded domain.

- JTA Settings
- Node Manager Settings
- WebLogic Server

## Configure Node Manager Properties to allow SSL

Follow the steps below to update the `nodemanager.properties` with the correct Private Key Passphrase.

Under the following location: `DOMAIN_HOME/nodemanager` update the following properties in the `nodemanager.properties` file:

- `CustomIdentityKeyStorePassPhrase=`
- `CustomIdentityPrivateKeyPassPhrase=`

Set these to the value “`0uaf_demo_c3rt`”

**Note:** At first when the node manager is started, the values in the file will be encrypted. These values will need to be updated in production configuration with the proper values based on your configuration.

## Configure `setDomainEnv.sh` Script

You will need to set the value of `SPLEBASE` with the proper value for your implementation. Under the following location, `DOMAIN_HOME/bin`, update the `setDomainEnv.sh` file and add the following

```
SPLEBASE="${SPLEBASE}"
```

**Note:** You will need to update `${SPLEBASE}` with appropriate value based on your configuration.

## Update `SPLEBASE`

The following update in the configuration indicates if the embedded configuration is being utilized or if the environment is a native installation to Weblogic. When this item is populated in the environment, the delivered base tools will be able to identify that the starting and stopping of the environment are being done under the domain home.

1. Initialize the Environment: `splenvron.sh -e <Environment_Name>`
2. Execute: `configureEnv.sh -a`
3. Select Menu Item: 52. Advanced Web Application Configuration

=====

4. 02. Configuration Option: Domain Home Location

Current Value <ENTER>:

The WebLogic Domain Home location, when this parameter is populated you will need to use the native WebLogic tools for maintenance (starting, stopping, deployment, and undeployment).

Enter Value: <Enter your domain home location>

5. Once the Domain Home location has been completed, Enter <P> Process

### Update setDomainEnv.sh

Edit setDomainEnv.sh and change antlr, serializer and xalan jar versions to the following:

- antlr-2.7.7.jar
- serializer-2.7.2.jar
- xalan-2.7.2.jar

### Update setUserOverrides.sh

Edit setUserOverrides.sh and add the below to JAVA\_OPTIONS. For AIX, the below parameters also need to be added to JAVA\_OPTIONS.

```
-
Djavax.xml.transform.TransformerFactory=org.apache.xalan.processor
.TransformerFactoryImpl -
Djavax.xml.validation.SchemaFactory:http://www.w3.org/2001/
XMLSchema=org.apache.xerces.jaxp.validation.XMLSchemaFactory
```

## Database Patching

The database patching utility is delivered under SPLEBASE and is Java-based so you are able to create a standalone package to be able to install database patches on a separate server that has Java 7 installed. You can also install database patches using the components that are delivered under SPLEBASE without the need to move the database patching utility to a different server.

The following is an overview of the process to install database patches on a separate server. You will need to create a jar file containing the utilities and supporting files to allow you to run the database patch installer on another server.

To generate the jar file:

1. Initialize a command shell:

The scripts that are provided with the system need to be run from a shell prompt on the machine where you installed the application server. Before such scripts can be run the shell must be "initialized" by running the splenvron script provided with the system.

**UNIX**

Log on to your UNIX box as the Oracle Utilities Administrator (default cissys) and open a shell prompt.

In the following example, replace the variables

- \$SPLEBASE with the Full directory name that you installed the application into
- \$SPLENVIRON with the name you gave to the environment at installation time

To initialize the environment enter:

```
$SPLEBASE/bin/splenvron.sh -e $SPLENVIRON
```

For example:

```
/ouaf/DEMO/bin/splenvron.sh -e DEMO
```

**Windows**

The command window should be opened on the Windows server that you installed the application on.

In the below example you should replace the following variables:

- %SPLEBASE%: The Full directory name that you installed the application into
- %SPLENVIRON%: The name you gave to the environment at installation time

To initialize the environment, type the following in your command prompt:

```
%SPLEBASE%\bin\splenvron.cmd -e %SPLENVIRON%
```

For example:

```
D:\ouaf\DEMO\bin\splenvron.cmd -e DEMO
```

2. Execute the following script to generate the jar file.

**UNIX**

```
ksh $SPLEBASE/bin/createDBStandlone.sh
```

**Windows**

```
%SPLEBASE%\bin\createDBStandlone.cmd
```

**Note:** By default, the output jar db\_patch\_standalone.jar is created in SPLEBASE/tools/dbstandalone. You can use the -l option to change the default directory.

3. Transfer the generated jar (db\_patch\_standalone.jar) to the Windows/Unix machine where you want to run the database patching utility.
4. Extract the contents of the archive file:

```
jar xvf db_patch_standalone.jar
```

**Note:** You must have Java 7 JDK installed on the machine to use the jar command. Be sure to install the JDK that is supported for your platform.

**Overview of Database Patching Application**

The database patching utility requires you have Java 7 JDK installed on the machine to execute the database patch application process.

The patch application process will perform following items to account for executing patch application under SPLEBASE or on a standalone server.

The database patch application utility will look do the following when it is executed:

- Checks to see if the environment variable \$SPLEBASE is set.  
If the \$SPLEBASE variable is set, the utility uses the libraries under \$SPLEBASE to apply the patch.
- When the \$SPLEBASE is not set, the utility checks to see if the TOOLSBIN environment variable is set.  
If the TOOLSBIN is set, the utility uses the libraries under the TOOLSBIN location.
- When both SPLEBASE and TOOLSBIN environment are not set, the utility prompts for the location of the TOOLSBIN.  
The TOOLSBIN is the location of the of the application scripts ouafDatabasePatch.sh[cmd].

### Unix Example:

The TOOLSBIN location would be set to /ouaf/dbpatch/bin

```
export TOOLSBIN=/ouaf/dbpatch/bin
```

Unix Sample - Database Patch Application (ouafDatabasePatch.sh)

**Note:** The default permissions (ouafDatabasePatch.sh), may need to be adjusted to be executed by your user and group, when applying database fixes.

- Sample Execution – Passing a Password

```
./ouafDatabasePatch.sh -x ouafadm -p "-t O -d  
CISADM_Z1_12C_43020_BLD001,slc04lds:1522:Z143Q12C"
```

- Sample Execution – Prompting for a Password

```
./ouafDatabasePatch.sh -p "-t O -d  
CISADM_Z1_12C_43020_BLD001,slc04lds:1522:Z143Q12C"
```

- Sample Execution - passing in the tools bin location

```
/ouafDatabasePatch.sh -u  
ouafDatabasePatch.sh [-h] [-u] [-v] [-x] [-t tools dir] [-p  
ouafparms]  
-h displays help of ouafpatch  
-u displays usage of ouafDatabasePatch.sh  
-v displays version of ouafpatch  
-x password to be passed to ouafpatch  
-b location of the tools bin directory  
-p parameters directly passed to ouafpatch  
must be the last parameter passed and  
be enclosed with quotes
```

### WINDOWS Example:

The TOOLSBIN location would be set to c:\ouaf\dbpatch\bin

```
SET TOOLSBIN=c:\ouaf\dbpatch\bin
```

Windows Sample - Database Patch Application (ouafDatabasePatch.cmd)

- Sample Execution – Passing a Password

```
ouafDatabasePatch.cmd -x password -p "-t O -d
SCHEMA_NAME,DBSERVER:DBPORT:DBSID"
```

- Sample Execution – Prompting for a Password

```
ouafDatabasePatch.cmd -p "-t O -d
SCHEMA_NAME,DBSERVER:DBPORT:DBSID C"
```

- Sample Execution - passing in the tools bin location

```
ouafDatabasePatch.cmd -b "C:\temp\db_patch_standalone\bin" -p
"-t O -d SCHEMA_NAME,DBSERVER:DBPORT:DBSID -c
C:\temp\dbrollup\CDXPatch2\CDXPatch.ini"
```

### Windows Sample Usage

```
ouafDatabasePatch.cmd -u
USAGE:
USAGE:ouafDatabasePatch.cmd[-h] [-u] [-v] [-x] [-b tools dir] [-
p ouafparms]
USAGE:          -h    displays help of ouafpatch
USAGE:          -u    displays usage of ouafDatabasePatch.cmd
USAGE:          -v    displays version of ouafpatch
USAGE:          -x    password to be passed to ouafpatch
USAGE:          -b    location of the tools bin directory
USAGE:          -p    parameters directly passed to ouafpatch
USAGE:          must be enclosed with quotes: " "
```

## BI Publisher Report Configuration

This section describes the steps required to configure Oracle Utilities Meter Data Management and Oracle BI Publisher to support a reporting solution that uses Oracle BI Publisher.

This release of Oracle Utilities Meter Data Management has a separate bundle with a sample BI Publisher 11g report.

### Unzip Oracle Utilities Meter Data Management Report Files

1. Unzip the MDM-V2.2.0.1.0-Reports.zip file from the installation media into an <TEMPDIR> directory. We'll refer to this directory as the reports extract folder.
2. For both UNIX and Windows platforms, a sub-directory named BIPublisher11g is created. The contents of the installation directory are identical for both platforms.

**Note:** By default, the reports provided are read only. You will need to reset the permissions on the files before making any changes, for example, to configure the default data source.

### Publish the Sample Reports in Oracle BI Publisher Enterprise

The installation media contains sample reports provided with the system. The report files are in the reports extract folder under <TEMPDIR>\BIPublisher11g\reportFiles

Install Oracle BI Publisher Enterprise. This section assumes that you have already installed Oracle BI Publisher Enterprise.

To configure the BI Publisher reports, follow these steps:

1. Create a folder named D2\_VEEEME in the <BI\_Repository\_Path>\Reports folder

2. Copy D2\_VEEEME.xdo and D2\_VEEEME.xdm folders to  
<BI\_Repository\_Path>\Reports\D2\_VEEEME folder
 

**Note:** To check for the location of your <BI\_Repository\_Path>, log in to the BI console as an Administrator and go to **Administration, Server Configuration**. If the repository type is File System, the path will be seen in Catalog region. If the repository type is not File System you cannot load the sample reports.
3. Login as Administrator to BI Publisher server.
4. Go to the **Administration** tab.
  - a. In the **JDBC Connection** section under **Data Sources**, add a new data source using **Add Data Source**.
  - b. Create a new Data Source named **D2 201 Dev** with connection details pointing to the D2 201 Dev database.
  - c. Test Connection to make sure the Database connection is successful and save changes using **Apply**.
 

**Note:** Make sure the Data Source Name (D2 201 Dev) is created with the same name else the reports won't show up.
5. Go to the **Catalog** Tab
  - a. Click **New->Report** from dropdown list and select “Use Existing Data Model” option to create new reports using existing data model and then select Data Model from the Shared folders Catalog.
 

For example: ./Shared Folders/D2\_VEEEME/D2\_VEEEME.xdm).
  - b. Click **Next** and select “Use Report Editor” option. Click **Finish**.
  - c. Select **My Folder** and save report name as D2\_VEEEME.
6. Go to the **Catalog** tab, select D2\_VEEEME Report under My folders and click **Open**.
 

Once the report is open, click **Actions** and Export Data as XML. Save it.
7. Go to the **Catalog** tab, select **My Folders** and click on **Edit Report** (D2\_VEEEME) and then click on Data Model D2\_VEEEME. Under **Attachment** click on “Upload Sample data” and browse the xml file saved from above and then upload it. Click on **Save** and return.
8. Click **Add New Layout**. Under **Upload or Generate Layout**, click **Upload** and give Layout Name as D2\_VEEEME.rtf.
 

Browse Template File to  
<BI\_Repository\_Path>\Reports\D2\_VEEEME\D2\_VEEEME.xdo folder and select D2\_VEEEME.rtf file. Select type as RTF template and Locale as **English** and click on **Upload**.
9. Click **View Report** to see reports.
 

**Note:** Please follow the same steps for configuring other reports except for step 4.

# Appendix A

---

## Installation Menu Functionality Overview

This chapter provides an overview of the Installation Menu Functionality and also the respective menu details.

The main configuration menu is structured so that related variables and/or options are grouped together and are associated by a menu item number. To access a particular group of variables and options, enter the menu item number associated with that group. Each option is displayed in turn on the screen, along with a prompt so that you can type the desired value for the option, if it is not the same as the default or current value.

When performing the initial installation you need to go through all menu options. The menu options may have a default value, a list of valid values and a validation check.

On each option prompt you can keep the current value by simply leaving the input line empty. In order to erase a variable value you need to enter one dot (“.”). The leading spaces will be trimmed out on each values entered. The menu includes the following:

- **Valid Values: [ALFANUM]**. This indicates you will need to enter an alphanumeric value in the prompt.
- **Valid Values: [NUM]**. This indicates you will need to enter an numeric value in the prompt.

Please also note the following:

- When all options are set, type <P> at the main menu prompt option. This will save the option values selected throughout the configuration.
- During this processing the global variables are validated and the configuration file <SPLEBASE>/etc/ENVIRON.INI is created or updated. This file contains all the variables inputted and calculated. These are needed by the next part of the installation process.
- To exit the configuration utility without saving any of the values entered, type <X> and press 'Enter'.



## Installation Menu Functionality Details

The Environment Installation Utility requires that Oracle Client Home is set in the path for the user performing the installation.

Prior to running the installation utility you will need to review the supported platforms document to ensure you have all of the Third Party software installed.

In this menu if the variables are set prior to execution, that value will be defaulted by the installation utility when performing the installation.

When the installation has been completed successfully, the values will be written to an ENVIRON.INI file. When splenviron.sh / cmd is executed, it will read from the ENVIRON.INI file to set the environment variables. Refer to the *Oracle Utilities Application Framework Server Administration Guide* for details about configuring these values.

Install the Oracle Client software specified in the [Supported Platforms](#) section prior to running any of the installation utilities.

The following prompt will appear when executing the installation utility:

```
Enter Oracle Client Home Directory (<ENTER> quit):
```

**Note:** If the environmental variable ORACLE\_CLIENT\_HOME is set, the install script will validate the variable. If it passes the validation you will not be prompted for it. This is needed in order to run Perl installation utilities.

### Encryption Methods

When the application server choice is Oracle WebLogic, the Oracle Utilities Application Framework installation uses the WebLogic API to encrypt the User ID and password that perform admin functions for the WebLogic application servers. Please refer to the WebLogic documentation for further information about the encryption.

The Oracle Utilities Application Framework installation also uses industry standard cryptography to encrypt passwords that are prompted within the installation.

When these passwords are entered in the command line, the input values are not reflected on the screen when performing the installation.

# Appendix B

---

## Installation and Configuration Worksheets

### Application Framework Installation and Configuration Worksheets

During the installation and configuration of the application you will need to provide a variety of system values. These worksheets will assist you in providing that information. They should be completed before installing the application framework. No Customer Install Value fields should be left blank.

**Note:** Some web application server information will not be available until the software installation steps have been completed as described in the [Installing Prerequisite Software](#) section in the [Chapter 3: Planning the Installation](#) for prerequisite third-party software installation instructions.

Refer to the *Oracle Utilities Server Administration Guide* for additional details (default, valid values, usage, etc.), as applicable.

## Menu Block 1: Environment ID, Roles, Third Party Software Configuration

Environment ID, Roles, Third Party Software Configuration options include:

Menu Option	Name Used in Documentation	Customer Install Value
Environment ID	ENVIRONMENT_ID	
Server Roles	SERVER_ROLES	
Oracle Client Home Directory	ORACLE_CLIENT_HOME	
Web Java Home Directory	JAVA_HOME	
Hibernate JAR Directory	HIBERNATE_JAR_DIR	
**ONS JAR Directory	ONS_JAR_DIR	
Web Application Server Home Directory	WEB_SERVER_HOME	
WebLogic Server Thin-Client JAR Directory	WLTHINT3CLIENT_JAR_DIR	
* ADF Home Directory	ADF_HOME	
OIM OAM Enabled Environment	OPEN_SPML_ENABLED_ENV	

\* Denotes optional menu items that may be required for the product installation and variables.

\*\* In order to activate the RAC FCF, the application needs the external ons.jar file, from the ORACLE\_HOME path:

```
$ORACLE_HOME/opmn/lib/ons.jar
```

During the installation the relevant option should be populated with the folder location of the ons.jar.

## Menu Block 2: Keystore Options

The keystore is a set of files used for encryption, decryption and hash generation. The files reside in the following location:

<SPLEBASE>/ks/.ouaf\_keystore

<SPLEBASE>/ks/.ouaf\_storepass

In order to run the application correctly, data encryption, decryption and hash generation of data in the database and on the application server must be performed using the same keystore; otherwise, the application will fail.

Please review the section on configuring the OUAF Keystore in the *Oracle Utilities Security Guide* for information on setting up the keystore properly.

Keystore options include:

Menu Option	Name Used in Documentation	Customer Install Value
Import Keystore Directory	KS_IMPORT_KEYSTORE_FOLDER	
Store Type	KS_STORETYPE	
Alias	KS_ALIAS	
Alias Key Algorithm	KS_ALIAS_KEYALG	
Alias Key Size	KS_ALIAS_KEYSIZE	
HMAC Alias	KS_HMAC_ALIAS	
Padding	KS_PADDING	
Mode	KS_MODE	

## Menu Block 50: Environment Installation Options

Environment installation options include:

Menu Option	Name Used in Documentation	Customer Install Value
Environment Mount Point	SPLDIR	
Log File Mount Point	SPLDIROUT	
Environment Name	SPLNVIRON	
Web Application Server Type	SPLWAS	
Installation Application Viewer Module	WEB_ ISAPPVIEWER	
Install Demo Generation Cert Script	CERT_INSTALL_ SCRIPT	

Menu Option	Name Used in Documentation	Customer Install Value
Install Sample CM Source Code	CM_INSTALL_SAMPLE	

## Menu Block 1: Environment Description

The environment description menu option includes:

Menu Option	Name Used in Documentation	Customer Install Value
Environment Description	DESC	

## Menu Block 2: [WebLogic] Business Application Server Configuration

WebLogic Business Application Server configuration options include:

Menu Option	Name Used in Documentation	Customer Install Value
Business Server Host	BSN_WLHOST	
WebLogic Server Name	BSN_WLS_SVRNAME	
Business Server Application Name	BSN_APP	
MPL Admin Port number	MPLADMINPORT	
MPL Automatic Startup	MPLSTART	

## Menu Block 3: [WebLogic] Web Application Server Configuration

Weblogic Web Application Server configuration options include:

Menu Option	Name Used in Documentation	Customer Install Value
Web Server Host	WEB_WLHOST	
Weblogic SSL Port Number	WEB_WLSSLPORT	
Weblogic Console Port Number	WLS_ADMIN_PORT	
Weblogic Additional Stop Arguments	ADDITIONAL_STOP_WEBLOGIC	
Web Context Root	WEB_CONTEXT_ROOT	
WebLogic JNDI User ID	WEB_WLSYSUSER	
WebLogic JNDI Password	WEB_WLSYSPASS	
WebLogic Admin System User ID	WLS_WEB_WLSYSUSER	
WebLogic Admin System Password	WLS_WEB_WLSYSPASS	
WebLogic Server Name	WEB_WLS_SVRNAME	
Web Server Application Name	WEB_APP	
Deploy Using Archive Files	WEB_DEPLOY_EAR	
Deploy Application Viewer Module	WEB_DEPLOY_APPVIEWER	
Enable The Unsecured Health Check Service	WEB_ENABLE_HEALTHCHECK	
MDB RunAs User ID	WEB_IWS_MDB_RUNAS_USER	
Super User Ids	WEB_IWS_SUPER_USERS	

## Menu Block 4 - Database Configuration

The parameters below and in the worksheet are for the database configuration. Note that if changes are made to any of the database menu option items below, thus potentially connecting to a different schema, a warning will be displayed in the screen next to the

actual option that has been changed.

Menu Option	Name Used in Documentation	Customer Install Value
Application Server Database User ID	DBUSER	
Application Server Database Password	DBPASS	
MPL Database User ID	MPL_DBUSER	
MPL Database Password	MPL_DBPASS	
XAI Database User ID	XAI_DBUSER	
XAI Database Password	XAI_DBPASS	
Batch Database User ID	BATCH_DBUSER	
Batch Database Password	BATCH_DBPASS	
Web JDBC DataSource Name	JDBC_NAME	
JDBC Database User ID	DBUSER_WLS	
JDBC Database Password	DBPASS_WLS	
Database Name	DBNAME	
Database Server	DBSERVER	
Database Port	DBPORT	
ONS Server Configuration	ONSCONFIG	
Database Override Connection String	DB_OVERRIDE_CONNECTION	
Character Based Database	CHAR_BASED_DB	
Oracle Client Character Set NLS_LANG	NLS_LANG	

## Menu Block 5 - General Configuration Options

The general configuration options include:

Menu Option	Name Used in Documentation	Customer Install Value
Batch RMI Port	BATCH_RMI_PORT	
RMI Port number for JMX Business	BSN_JMX_RMI_PORT_PERFORMANCE	
RMI Port number for JMX Web	WEB_JMX_RMI_PORT_PERFORMANCE	
JMX Enablement System User ID	BSN_JMX_SYSUSER	

Menu Option	Name Used in Documentation	Customer Install Value
JMX Enablement System Password	BSN_JMX_SYSPASS	
Coherence Cluster Name	COHERENCE_CLUSTER_NAME	
Coherence Cluster Address	COHERENCE_CLUSTER_ADDRESS	
Coherence Cluster Port	COHERENCE_CLUSTER_PORT	
Coherence Cluster Mode	COHERENCE_CLUSTER_MODE	

## Menu Block 6 - SSL Certificate Keystore (WebLogic Only)

By default, SSL (Secure Sockets Layer) certificates are required for authentication. The product provides demo certificates generated with 1024 byte keys. For production environments, please use your own custom certificates.

Menu Option	Name Used in Documentation	Customer Install Value
Certificate Keystore Type	CERT_KS	
Identify Keystore Type	CERT_IDENT_KS_FILE	
Identify Keystore File Type	CERT_IDENT_KS_TYPE	
Identify Keystore Password	CERT_IDENT_KS_PWD	
Identity Private Key Alias	CERT_IDENT_KS_ALIAS	
Trust Keystore File	CERT_TRUST_KS_FILE	
Trust Keystore File Type	CERT_TRUST_KS_TYPE	
Trust Keystore Password	CERT_TRUST_KS_PWD	
Trust Private Key Alias	CERT_TRUST_KS_ALIAS	



## Menu Block 7 - OUAF TrustStore Options

The OUAF truststore configuration is required for IWS.

Menu Option	Name Used in Documentation	Customer Install Value
Import TrustStore Directory	TS_IMPORT_KEYSTORE_FOLDER	
Store Type	TS_STORETYPE	
Alias	TS_ALIAS	
Alias Key Algorithm	TS_ALIAS_KEYALG	
Alias Key Size	TS_ALIAS_KEYSIZE	
HMAC Alias	TS_HMAC_ALIAS	
Padding	TS_PADDING	
Mode	TS_MODE	

## Advanced Menu Options

The advanced menu options are not available during installation. These options can be accessed after installation using the following commands:

**Unix:**

```
$SPLEBASE/bin/configureEnv.sh -a
```

**Windows**

```
%SPLEBASE%\bin\configureEnv.cmd -a
```

## Menu Block 50 - WebLogic Advanced Environment Miscellaneous Configuration

WebLogic advanced environment miscellaneous configurations include:

Menu Option	Name Used in Documentation	Customer Value Install
OUIAF DBMS Scheduler User	OUIAF_DBMS_SCHEDULER_USER	
Online JVM Batch Server Enabled	BATCHENABLED	
Online JVM Batch Server Enabled	BATCHENABLED	
Online JVM Batch Number of Threads	BATCHTHREADS	
Online JVM Batch Scheduler Daemon Enabled	BATCHDAEMON	
Enable Batch Edit Functionality	BATCHEDIT_ENABLED	
Batch Online Log Directory	BATCH_ONLINE_LOG_DIR	
Enable Web Services Functionality	WEBSERVICES_ENABLED	
IWS deployment target	WLS_CLUSTER_NAME	
Web Admin Server Host	WEB_ADMIN_SERVER	
GIS Service Running on the same Web Server	GIS	
GIS Service URL	GIS_URL	
GIS WebLogic System User ID	GIS_WLSYSUSER	
GIS WebLogic System Password	GIS_WLSYSPASS	
Online Display Software Home	ONLINE_DISPLAY_HOME	
Max Queries To Hold In Cache Across All Threads	XQUERIES_TO_CACHE	
Seconds Timeout Flush Cache Completely	XQUERY_CACHE_FLUSH_TIMEOUT	
Cloud Restriction URLs Enable	CLOUD_RESTRICTION_URLS_ENABLE	
Cloud White List Full Path	CLOUD_WHITE_LIST_PATH	

---

<b>Menu Option</b>	<b>Name Used in Documentation</b>	<b>Customer Value Install</b>
Cloud Custom White List Full Path	CLOUD_CUSTOM_WHITE_LIST_PATH	

---

## Menu Block 51 - WebLogic Advanced Environment Memory Configuration

Weblogic advanced environment memory configurations include:

Menu Option	Name Used in Documentation	Customer Install Value
Web Application Java Initial Heap Size	WEB_MEMORY_OPT_MIN	
Web Application Java Max Heap Size	WEB_MEMORY_OPT_MAX	
Web Application Java Max Perm Size	WEB_MEMORY_OPT_MAXPERMSIZE	
Web Application Additional Options	WEB_ADDITIONAL_OPT	
Global JVM Arguments	GLOBAL_JVMARGS	
Ant Min Heap Size	ANT_OPT_MIN	
Ant Max Heap Size	ANT_OPT_MAX	
Ant Additional Options	ANT_ADDITIONAL_OPT	
Thread Pool Worker Java Min Heap Size	BATCH_MEMORY_OPT_MIN	
Thread Pool Worker Java Max Heap Size	BATCH_MEMORY_OPT_MAX	
Thread Pool Worker Java Max Perm Size	BATCH_MEMORY_OPT_MAXPERMSIZE	
Thread Pool Worker Additional Options	BATCH_MEMORY_ADDITIONAL_OPT	
Additional Runtime Classpath	ADDITIONAL_RUNTIME_CLASSPATH	

## Menu Block 51 - Advanced Web Application Configuration

Advanced web application configurations include:

Menu Option	Name Used in Documentation	Customer Install Value
Web Application Cache Settings	WEB_L2_CACHE_MODE	
Web Server Port Number	WEB_WLPORT	
WebLogic Overload Protection	WLS_OVERRIDE_PROTECT	
Domain Home Location	WLS_DOMAIN_HOME	
Batch Cluster URL	WEB_BATCH_CLUSTER_URL	

<b>Menu Option</b>	<b>Name Used in Documentation</b>	<b>Customer Install Value</b>
Strip HTML Comments	STRIP_HTML_COMMENTS	
Authentication Login Page Type	WEB_WLAUTHMETHOD	
Web Form Login Page	WEB_FORM_LOGIN_PAGE	
Web Form Login Error Page	WEB_FORM_LOGIN_ERROR_PAGE	
Application Viewer Form Login Page	WEB_APPVIEWER_FORM_LOGIN_PAGE	
Application Viewer Form Login Error Page	WEB_APPVIEWER_FORM_LOGIN_ERROR_PAGE	
Help Form Login Page	WEB_HELP_FORM_LOGIN_PAGE	
Help Form Login Error Page	WEB_HELP_FORM_LOGIN_ERROR_PAGE	
Web Security Role	WEB_SECURITY_NAME	
Web Principal Name	WEB_PRINCIPAL_NAME	
Application Viewer Security Role	WEB_APPVIEWER_ROLE_NAME	
Application Viewer Principal Name	WEB_APPVIEWER_PRINCIPAL_NAME	
This is a development environment	WEB_ISDEVELOPMENT	
Preload All Pages on Startup	WEB_PRELOADALL	
Maximum Age of a Cache Entry for Text	WEB_MAXAGE	
Maximum Age of a Cache Entry for Images	WEB_MAXAGEI	
JSP Recompile Interval (s)	WEB_wlpageCheckSeconds	

## Menu Block 53 - Advanced Web Application Configuration

Advanced web application configurations include:

Menu Option	Name Used in Documentation	Customer Install Value
SPML SOAP Trace Setting	OIM_SPML_SOAP_DEBUG_SETTING	
SPML IDM Schema Name	OIM_SPML_UBER_SCHEMA_NAME	
SPML OIM Name Space	OIM_SPML_NAME_SPACE	
SPML OIM Enclosing Element	OIM_SPML_SOAP_ELEMENT	

## Menu Block 54 - WebLogic Diagnostics

WebLogic diagnostic options include:

Menu Option	Name Used in Documentation	Customer Install Value
Diagnostic Context Enabled	WLS_DIAGNOSTIC_CONTEXT_ENABLED	
Diagnostic Volume	WLS_DIAGNOSTIC_VOLUME	
Built-in Module	WLS_DIAGNOSTIC_BUILT_IN_MODULE	

## Menu Block 53 - OIM Configuration Settings

OIM Configuration Settings include:

Menu Option	Name Used in Documentation	Customer Install Value
SPML SOAP Trace Setting	OIM_SPML_SOAP_DEBUG_SETTING	
SPML IDM Schema Name	OIM_SPML_UBER_SCHEMA_NAME	
SPML OIM Name Space	OIM_SPML_NAME_SPACE	
SPML OIM Enclosing Element	OIM_SPML_SOAP_ELEMENT	

## Menu Block 55 - URI, File and URL Related Options

URI, File and URL Related Options include:

Menu Option	Name Used in Documentation	Customer Install Value
Restriction URLs Enable	CLOUD_RESTRICTION_URLS_ENABLE	
Custom SQL Security	CUSTOM_SQL_SECURITY	
White List Full Path	CLOUD_WHITE_LIST_PATH	
Custom White List Full Path	CLOUD_CUSTOM_WHITE_LIST_PATH	
Substitution Variable List File Location	CLOUD_SUBSTITUTION_VARIABLE_LIST_FILE_LOCATION	
Directory For Variable F1_CMA_FILES	CLOUD_LOCATION_F1_MIGR_ASSISTANT_FILES	

The following list identifies entries that are visible on the menu but will be deprecated in a future release so they should not be used:

Directory For Variable F1_BI_EXTRACTS	CLOUD_LOCATION_F1_BI_EXTRACT	
Directory For Variable F1_INTERNAL_FILES	CLOUD_LOCATION_F1_PROD_INTER_FILES	
Directory For Variable F1_CUST_APP_BASE	CLOUD_LOCATION_F1_CUST_APP_BASE	
Directory For Variable F1_PROCESS_DIR	CLOUD_LOCATION_F1_PROCESS_DIR	
Directory For Variable F1_SVC_CATALOG_WSDL_DIR	CLOUD_LOCATION_F1_SVC_CATALOG_WSDL_DIR	
Directory For Variable F1_PDB_EXTRACTS	CLOUD_LOCATION_F1_PDB_EXTRACTS	

# Service and Measurement Data Foundation Installation and Configuration Worksheets

During the installation and configuration of the application you will need to provide a variety of system values. These worksheets will assist you in providing that information. They should be completed before installing the application framework. No Customer Install Value fields should be left blank.

**Note:** The OSB configuration and SOA configuration menus are optional for Oracle Utilities Meter Data Management and Oracle Utilities Customer To Meter and can be skipped. These configurations are required in case another product such as Oracle Utilities Smart Grid Gateway will also be installed on top of Oracle Utilities Service and Measurement Data Foundation.

## WebLogic OSB Configuration

The WebLogic OSB configuration includes:

Menu Option	Name Used In Documentation	Customer Install Value
OSB Home	OSB_HOME	
OSB Host Server	OSB_HOST	
OSB Port Number:	OSB_PORT_NUMBER	
OSB SSL Port Number	OSB_SSL_PORT	
JDBC URL for database	DBURL_OSB	
OSB Service Table Schema Name	RCUSTBSHEMA_ OSB	
OSB Service Table Schema Password	RCUSTBSCHEMAPWD_OSB	
OSB WebLogic User Name	WEBLOGIC_ USERNAME_OSB	
OSB WebLogic User Password	WEBLOGIC_ PASSWORD_OSB	
OSB WebLogic User Password	OSB_PASS_WLS	
Mount point for OSB files	OSB_LOG_DIR	



## WebLogic SOA Configuration

The WebLogic SOA Configuration includes:

Menu Option	Name Used in this Documentation	Customer Install Value
SOA Home	SOA_HOME	
SOA Host Server	SOA_HOST	
SOA Port Number:	SOA_PORT_NUMBER	
SOA SSL Port Number	SOA_SSL_PORT_NUMBER	
SOA Internal URL	SOA_INTERNAL_URL	
SOA External URL	SOA_EXTERNAL_URL	
JDBC URL for database	DBURL_SOA	
SOA Service table schema Name	RCUSTBSHEMA_SOA	
SOA Service table schema Password	RCUSTBSHEMAPWD_SOA	
SOA WebLogic User Name	WEBLOGIC_USERNAME_SOA	
SOA WebLogic User Password	WEBLOGIC_PASSWORD_SOA	
Specify the path for XAI/IWS Service	WEB_SERVICE_PATH	

## WebLogic SOA Configuration Plan

The WebLogic SOA Configuration Plan includes:

Menu Option	Name Used In Documentation	Customer Install Value
MDF Bulk Request Callback URL	D1_BULK_REQUEST_CALLBACK_URL	
MDF Headend http connection timeout	D1_HEADEND_HTTP_CONNECTION_TIMEOUT	
MDF Headend http read timeout	D1_HEADEND_HTTP_READ_TIMEOUT	
MDF SOA Request Queue JNDI Name	SOA_REQUEST_QUEUE_D1	
MDF SOA Notify Queue JNDI Name	SOA_NOTIFY_QUEUE_D1	
MDF SOA Command Queue JNDI Name	SOA_COMMAND_QUEUE_D1	

Menu Option	Name Used In Documentation	Customer Install Value
SGG-NMS TestHarness Partition Name	SOA_PARTITTON_D1	

## Configuration for DataRaker Integration

The Configuration for DataRaker Integration includes:

Menu Option	Name Used In Documentation	Customer Install Value
Destination Queue to publish SGG payloads for DataRaker Integration Tool	SGG_DR_INT_QUEUE	
Number of records (SGG Payloads) to accumulate	SOA_DR_PUBLISH_SIZE	
Max file size for the accumulated (SGG Payloads) file in Kilobytes	SOA_DR_FILE_SIZE	
Specify a time which, when exceeded, causes a new outgoing file to be created in seconds	SOA_DR_ELAPSED_TIME	
Polling frquency of Staging directory for new files in seconds	SOA_DR_POLLING_FREQ	
Mount point/directory for the accumulated SGG payload file	SOA_DR_STAGING_DIR	
Mount Point/directory for the converted XML file to place for DataRaker	SOA_DR_INTEGRATION_DIR	

## Advanced Menu Options

The advanced menu options are not available during installation. These options can be accessed after installation using the following commands:

### Unix

```
$SPLEBASE/bin/configureEnv.sh -a
```

### Windows

```
%SPLEBASE%\bin\configureEnv.cmd -a
```

## Advanced Menu Option for OSB SSL Deployment

The Advanced Menu Option for OSB SSL deployment includes:

Menu Option	Name Used In Documentation	Customer Install Value
Enable OSB SSL Port	OSB_SSL	
OSB Trust Keystore Type	OSB_TRUST_KS	
OSB Trust Keystore File Type	OSB_TRUST_KS_ TYPE	
OSB Trust Keystore File	OSB_TRUST_KS_ FILE	

## Advanced Environment Memory Configurations

The Advanced Environment Memory configurations include:

Menu Option	Name Used In Documentation	Customer Install Value
SOA Initial Heap Size	SOA_MEMORY_OPT_MIN	
SOA Maximum Heap Size	SOA_MEMORY_OPT_MAX	
SOA Minimum Perm Size	SOA_MEMORY_OPT_MINPERM SIZE	
SOA Maximum Perm Size	SOA_JVM_ ADDITIONAL_OPT	
The name of the OWSM policy to use when SOA calls another SOA service	SOA_SOA_CLIENT_ POLICY	
The name of the OWSM policy to use when SOA is called by another SOA service	SOA_SOA_SERVICE_POLICY	
The name of the OWSM policy to use when SOA calls an OUAF service	SOA_SOA_SERVICE_POLICY	

The Advanced Memory Configurations for OSB includes:

Menu Option	Name Used In Documentation	Customer Install Value
OSB Initial Heap Size	OSB_MEMORY_OPT_MIN	
OSB Maximum Heap Size	OSB_MEMORY_OPT_MAX	
OSB Minimum Perm Size	OSB_MEMORY_OPT_MINPERM SIZE	

<b>Menu Option</b>	<b>Name Used In Documentation</b>	<b>Customer Install Value</b>
OSB Maximum Perm Size	OSB_MEMORY_OPT_MAXPERMSIZE	
OSB Application Additional Options	OSB_JVM_ADDITIONAL_OPT	

The Data Migration options include:

<b>Menu Option</b>	<b>Name Used In Documentation</b>	<b>Customer Install Value</b>
Enable Data Migration	DATA_MIGRATION	
Data Migration Database User	DATA_MIGRATION_DB_USER	
Data Migration Database Password	DATA_MIGRATION_DB_PASS	

The Advanced Configurations for SOA include:

<b>Menu Option</b>	<b>Name Used In Documentation</b>	<b>Customer Install Value</b>
Enable SOA SSL Port	SOA_SSL	
SOA Trust Keystore Type	SOA_TRUST_KS	
SOA Trust Keystore File Type	SOA_TRUST_KS_TYPE	
SOA Trust Keystore File	SOA_TRUST_KS_FILE	

# Appendix C

---

## Common Maintenance Activities

This appendix lists frequently-used commands that you use to perform common maintenance activities, such as starting and stopping the environment and thread pool worker, modifying the configuration items.

Run the following commands to perform these common tasks:

### To Initialize the Environment

1. Go the directory <install\_dir>/bin.
2. Run the following command:

#### UNIX

```
./splenviron.sh -e <Env_Name>
```

#### Windows

```
splenviron.cmd -e <Env_Name>
```

### To Start the WebLogic Server

1. Initialize the environment.
2. Run the following command:

#### UNIX

```
./spl.sh start
```

#### Windows

```
spl.cmd start
```

### To Stop the WebLogic Server

1. Initialize the environment.
2. Run the following command:

#### UNIX

```
./spl.sh stop
```

**Windows**

```
spl.cmd stop
```

**To Start the Thread Pool Worker**

1. Initialize the environment.
2. Run the following command:

**UNIX**

```
./spl.sh -b start
```

**Windows**

```
spl.cmd -b start
```

**To Stop the Thread Pool Worker**

1. Initialize the environment.
2. Run the following command:

**UNIX**

```
./spl.sh -b stop
```

**Windows**

```
spl.cmd -b stop
```

**To Modify the Configuration Values**

1. Initialize the environment.
2. Run the following command:

**UNIX**

```
configureEnv.sh
```

**Windows**

```
configureEnv.cmd
```

The configuration utility launches menu items. Select any Menu option.

3. Change the menu values.
4. After you change the menu values, press P to write the changes to the configuration file.
5. To apply the changes to the environment, run the initial setup script:

```
initialSetup.sh
```

**To Modify the Advanced Menu Option Values**

1. Initialize the environment.

The configuration utility launches menu items.

2. Run the following command:

**UNIX**

```
configureEnv.sh -a
```

**Windows**

```
configureEnv.cmd -a
```

3. Select any menu option.
4. Change the menu values.
5. To apply the changes to the environment, run initial setup script:

```
initialSetup.sh
```

# Appendix D

---

## Installing User Documentation as a Standalone Application

### Installing User Documentation

This section provides instructions for installing the Oracle Utilities Meter Data Management user documentation that is supplied with the system. The Oracle Utilities Meter Data Management user documentation is provided in PDF format for printing.

The documentation is also provided in HTML format located inside the Oracle Utilities Meter Data Management application server installation package. It is automatically installed and can be launched from the user interface. The files are under the applications directory packaged in the file named help.war. User documentation is provided in English (ENG).

The documentation material is divided into the following subdirectories underneath the language directory:

- D1: Oracle Utilities Service and Measurement Data Foundation User Guide
- D2: Oracle Utilities Meter Data Management User Guide
- F1: Oracle Utilities Application Framework Administration and Business Process Guides

### Installing Stand-Alone Online Help

You can also use the Oracle Utilities Meter Data Management online help in stand-alone mode (that is, you do not have to launch it from the Oracle Utilities Meter Data Management application or access it on the application server).

To install the Oracle Utilities Meter Data Management help for stand-alone operation, copy the help.war from the Oracle Utilities Meter Data Management server (environment) or from the Oracle Utilities Meter Data Management installation package to the server or machine on which you want to access the help. If you want to copy the file from any installed Oracle Utilities Meter Data Management environment, you can locate the file in the \$SPLEBASE/splapp/applications directory on the server.

Unzip the help.war file to any directory on your machine. To launch the Oracle Utilities Meter Data Management help in stand-alone mode, open the SPLHelp.html file (located inside the language directory that you wish to use).



**Note:** Do not change the subdirectory names. The documents use relative path names to link to other documents. Changing the subdirectory names will result in broken links.

## Customizing Help for Stand-Alone Operation

You can customize the SPLHelp.html file to open to the file and topic that you most frequently use. To do so, edit the SPLHelp.html file and change the DEFAULT\_BOOKMARK to the desired location. The default DEFAULT\_BOOKMARK is 'helpHome.html'.

## Installing Stand-Alone Help Under Web Server

You can also install Oracle Utilities Meter Data Management online help as a stand-alone web application. You can use any Web Application server like WebLogic. Configure the configuration file for your web application server to use web application help.

For example:

For WebLogic, configure config.xml file for deployed application Name="help" with URI="help.war" and set WebServer DefaultWebApp="help"

Access the documentation from the browser by the following URL:

`http://<host name>:<port name>/<WebContext>/<Lang>/SPLHelp.html`, where <hostname>:<portname> is the URL of the web server, <Web Context> is the root web context name specified during Web application server configuration, <Lang> is the name of the language directory, for example, ENG.

**Note:** Stand-alone online help files are not automatically updated when changes are made to the help files on the application server. You will have to re-install the stand-alone online help files.

# Appendix E

## Oracle Utilities Application Framework 4.3.0 Service Pack 4 (4.3.0.4.0) Fixes

The following table lists the Oracle Utilities Application Framework 4.3.0 Service Pack 4 (4.3.0.4.0) fixes included in this release.

Fix	Description
23128950	RESTRICTING URIS FOR THE CLOUD IS ACCEPTING ONLY TWO PROTOCOLS (HTTP & HTTPS)
24589020	COPY OF BUG 24583489 - GENAPPVIEWERITEMS FAILS IN WINDOWS IF ONLY ONLINE ROLE IS
25119728	ABILITY TO ADD SOAP HEADER PARAMETERS TO OUTBOUND MESSAGE
25300770	PROGRAM TO LIST CLASSES ALLOWABLE IN SOURCE FOR JAVADOCS
25343308	SUPPORT FOR HTTP REST CALL WITH JSON PAYLOAD&TRANSFORMATION FOR GIS INTEGRATION
25458441	INFO STRING WITH SPACE AND HYPHEN IN MONEY AND DATES WRAPS IN SERVICE ZONES
25459906	COPY OF 24495181 - COPY OF 24487407 - COPY OF 23742898 - COPY OF 22544303 - ISSU
25468195	INFO STRING HAVING DATE IN DESCRIPTION GETS WRAPPED IN BO SEARCH RESULTS
25471512	ISSUE FOUND WHEN CHECKBOX ELEMENT IS WITHIN A LIST
25478719	ADA: OUTSTANDING CCB KEYBOARD ISSUES 2.1.1, 2.4.3 AND 3.2.3
25479526	COPY OF 25210796 - SLA: PERFORMANCE TARGET ZONE NOT DISPLAYING TIME TARGET CORRE
25498483	USING F1-GETDBMSJOBS WITH JOBSTATUS SET TO COMP RETURNS A NULL AND OTHER ISSUES

<b>Fix</b>	<b>Description</b>
25506815	COPY OF 25485728 - COPY OF 25164929 - COPY OF 24965749 - SEARCH BY IS RESET AFTER
25509633	CMA - NPE APPLYING FIELD ACTIVITY MIGRATION OBJECT IN CCB
25513156	00239 - PLUG-IN DRIVEN BATCH DOES NOT SUPPORT ADDING ADDITIONAL SORT KEYS
25592230	COPY OF 25545108 - COPY OF 25419076 - OUTBOUND MESSAGE HAS THE MRID FIELD MISSIN
25610076	SUCCEEDING WARNINGS NO LONGER DISPLAYED AFTER ACCEPTING WARNING
25616513	MISSING INDEXES FOUND IN DB HEALTHCHECK ON INITIAL INSTALL
25616857	COPY OF 25201396 - WAM V2: ENHANCE OUTBOUND MESSAGE JSON SENDER TO SUPPORT DYNAM
25636490	COPY OF 24473095 - TEMPLATE PROPERTIES MISSING FORCE_FORWARD_SLASH
25636518	COPY OF 24749849 - CLD: BATCH ON WLS IS NOT ABLE TO START AFTER SECURITY HARDENI
25642648	TPW NOT WORKING IN WEBLOGIC DOMAIN FW 4.3.0.4.0
25645976	00239 - PLUG-IN DRIVEN BATCH RESULTS TO NPE ERROR WHEN VALIDATING TO DO TYPE
25704043	ONLY SHOW BATCH, ALGORITHM, ETC. SOURCE IN JAVADOCS
25712815	ADD SUPPORT FOR OWSM TO HTTP AND SOAP REALTIME SENDERS
25714240	MAKE REST SECURITY FILTER OPTIONAL FOR OWSM
25720956	COPY OF 25697855 - OUTBOUND WSDL AND IWS FROM WEB CATALOG HAS MISSING RESPONSE M
25754126	PHONE FORMAT ISSUE
25762422	NEW ISSUE BEING INTRODUCED BY FW BUG 25468195
25808038	CALENDAR POPUP THROWS JAVASCRIPT ERRORS IF YOU TRY TO USE ANY OF THE WIDGETS
25831771	HTTP HEADERS WRAPPED IN [ ]