

Installer Pre-Requisite Setup Guide  
Oracle Banking APIs  
Release 21.1.0.0.0

Part No. F40802-01

May 2021

**ORACLE®**

## Installer Pre-Requisite Setup Guide

May 2021

Oracle Financial Services Software Limited

Oracle Park

Off Western Express Highway

Goregaon (East)

Mumbai, Maharashtra 400 063

India

Worldwide Inquiries:

Phone: +91 22 6718 3000

Fax:+91 22 6718 3001

[www.oracle.com/financialservices/](http://www.oracle.com/financialservices/)

Copyright © 2006, 2021, Oracle and/or its affiliates. All rights reserved.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are “commercial computer software” pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate failsafe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

This software or hardware and documentation may provide access to or information on content, products and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

---

## Table of Contents

<b>1. Preface .....</b>	<b>1-1</b>
1.1 Intended Audience.....	1-1
1.2 Documentation Accessibility .....	1-1
1.3 Access to Oracle Support.....	1-1
1.4 Structure .....	1-1
1.5 Related Information Sources.....	1-1
<b>2. Introduction .....</b>	<b>2-1</b>
2.1 Software List.....	2-1
2.2 Pre-requisite software installation and OS configuration for OBAPI Installer .....	2-2
2.3 Python 3.8.0 installation on Linux Operating System.....	2-6
<b>3. Installing and Configuring Weblogic Infrastructure 12c.....</b>	<b>3-1</b>
3.1 Installing Stand-alone Weblogic Infrastructure.....	3-1
<b>4. Oracle HTTP Server Installation .....</b>	<b>4-1</b>
4.1 Installing and Configuring Oracle HTTP Server (OHS) .....	4-1
4.2 Verifying the Installation .....	4-18
<b>5. Oracle HTTP Server Webgate Installation and Configuration.....</b>	<b>5-1</b>
5.1 Configuring Oracle Webgate .....	5-1
5.2 Verifying the configuration of Oracle HTTP Server 12c WebGate .....	5-3
5.3 Registering the New Oracle HTTP Server 12c WebGate .....	5-3
<b>6. Oracle Analytics Publisher Installation .....</b>	<b>6-1</b>

---

# 1. Preface

## 1.1 Intended Audience

This document is intended for the following audience:

- Customers
- Partners

## 1.2 Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

## 1.3 Access to Oracle Support

Oracle customers have access to electronic support through My Oracle Support. For information, visit

<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit

<http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

## 1.4 Structure

This manual is organized into the following categories:

Preface gives information on the intended audience. It also describes the overall structure of the User Manual.

The subsequent chapters describes following details:

- Introduction
- Preferences & Database
- Configuration / Installation.

## 1.5 Related Information Sources

For more information on Oracle Banking APIs Release 21.1.0.00, refer to the following documents:

- Oracle Banking APIs Installation Manuals

## 2. Introduction

This guide helps you to do the pre-requisite setup required before the execution of OBAPI 21.1.0.00 Installer.

More details about each task are explained in detail in following sections.

### 2.1 Software List

Software Name	Version	Mandatory Software
Operating System	ORACLE LINUX 7.x	Y
Oracle Database	19.10.0.0.0	Y
Oracle Java Development Kit	1.8.0_281	Y
Oracle Weblogic Infrastructure	12.2.1.4.0	Y
Oracle HTTP Server	12.2.1.4.0	Y
Oracle Analytics Publisher	12.2.5.5.0	N**
Oracle Identity and Access Management Suite (IAM)	12.2.1.3.0	N*
LDAP (OUD)	12.2.1.3.0	N*
Oracle Digital Assistant (ODA)	20.05	N***
Python	3.8.0	Y****
Python Package: cx_Oracle	8.1.0	Y*****
Python Package: urwid	2.1.2	Y
<p>* Required if OBAPI Native Authentication is not used and OAM is managing Authentication</p> <p>** Required if Integration with Oracle Analytics Publisher is needed.</p> <p>*** Required if OBAPI Chat bot Banking Features are used.</p> <p>**** For python 3 installation refer section <b>2.3 Pre-requisite software installation and OS configuration for OBAPI Installer – Python 3.8.0 for Linux Operating System</b></p> <p>***** In case of python 3 cx_Oracle needs to be re-installed.</p>		

## 2.2 Pre-requisite software installation and OS configuration for OBAPI Installer

Below steps assume Python 3.8.0 is installed and available on server. You can verify the Python version by executing the command as shown below:

```
[devops@obdxwls ~]$ python3 --version
Python 3.8.0
[devops@obdxwls ~]$
```

---

**Note:** Below steps require root login on server where OBAPI software pre-requisite are performed (i.e. Server which host Oracle Weblogic)

---

### cx\_Oracle (Software Installation)

Step 1: Install the **oracle-release-el7** and **oraclelinux-developer-release-el7** release packages to set up yum repository access for Oracle Instant Client and cx\_Oracle

```
$yum -y install oracle-release-el7 oraclelinux-developer-release-el7
```

```
If /etc/yum.repos.d/public-yum-ol7.repo file exists and you have the base oraclelinux-
release-<rel> package installed, you may still need to run
the /usr/bin/ol_yum_configure.sh script.
$ /usr/bin/ol_yum_configure.sh
```

Step 2: Install cx\_Oracle

- a. Download cx\_Oracle from [cx\\_Oracle](#) (or [cx-oracle.org](#)) website
- b. Extract the tar file as shown below

```
bash-4.2# untar cx_Oracle-8.1.0.tar.gz
bash: untar: command not found
bash-4.2# tar -xvf cx_Oracle-8.1.0.tar.gz
cx_Oracle-8.1.0/
cx_Oracle-8.1.0/LICENSE.txt
cx_Oracle-8.1.0/MANIFEST.in
cx_Oracle-8.1.0/PKG-INFO
cx_Oracle-8.1.0/README.txt
cx_Oracle-8.1.0/cx_Oracle.egg-info/
cx_Oracle-8.1.0/cx_Oracle.egg-info/PKG-INFO
cx_Oracle-8.1.0/cx_Oracle.egg-info/SOURCES.txt
cx_Oracle-8.1.0/cx_Oracle.egg-info/dependency_links.txt
```

- c. Browse into the extracted directory and run below command

## Python3 setup.py build\_py

```

bash-4.2# python3 setup.py install
running install
running bdist_egg
running egg_info
writing cx_Oracle.egg-info/PKG-INFO
writing dependency_links to cx_Oracle.egg-info/dependency_links.txt
writing top-level names to cx_Oracle.egg-info/top_level.txt
reading manifest file 'cx_Oracle.egg-info/SOURCES.txt'
reading manifest template 'MANIFEST.in'
no previously-included directories found matching 'odpi/test'
no previously-included directories found matching 'odpi/samples'
writing manifest file 'cx_Oracle.egg-info/SOURCES.txt'
installing library code to build/bdist.linux-x86_64/egg
running install_lib
running build_ext
building 'cx_Oracle' extension
creating build
creating build/temp.linux-x86_64-3.8
creating build/temp.linux-x86_64-3.8/src
creating build/temp.linux-x86_64-3.8/odpi
creating build/temp.linux-x86_64-3.8/odpi/src

```

---

Note : OR you can install cx\_oracle from step mention in 2.3 below.

---

### Urwid (Software Installation)

Step 1: Download Urwid from Urwid (or urwid.org) website.

---

**Note:** Support version for Urwid is 2.1.2 (urwid-2.1.2.tar.gz)

---

Step 2: Extract the tar file as shown below

```

bash-4.2# tar -xvf urwid-2.1.2.tar.gz
urwid-2.1.2/
urwid-2.1.2/COPYING
urwid-2.1.2/MANIFEST.in
urwid-2.1.2/PKG-INFO
urwid-2.1.2/README.rst
urwid-2.1.2/docs/
urwid-2.1.2/docs/Makefile
urwid-2.1.2/docs/changelog.rst
urwid-2.1.2/docs/conf.py
urwid-2.1.2/docs/examples/
urwid-2.1.2/docs/examples/bigtext.py
urwid-2.1.2/docs/examples/bigtext.py.xdotool
urwid-2.1.2/docs/examples/bigtext1.py

```

**Step 3:** Browse into the extracted directory and run below command

```
# python3 setup.py build_py
```

```
bash-4.2# python3 setup.py build_py
running build_py
creating build
creating build/lib.linux-x86_64-3.8
creating build/lib.linux-x86_64-3.8/urwid
copying urwid/wimp.py -> build/lib.linux-x86_64-3.8/urwid
copying urwid/treetools.py -> build/lib.linux-x86_64-3.8/urwid
copying urwid/canvas.py -> build/lib.linux-x86_64-3.8/urwid
copying urwid/curses_display.py -> build/lib.linux-x86_64-3.8/urwid
copying urwid/signals.py -> build/lib.linux-x86_64-3.8/urwid
copying urwid/font.py -> build/lib.linux-x86_64-3.8/urwid
copying urwid/lcd_display.py -> build/lib.linux-x86_64-3.8/urwid
copying urwid/version.py -> build/lib.linux-x86_64-3.8/urwid
copying urwid/html_fragment.py -> build/lib.linux-x86_64-3.8/urwid
copying urwid/web_display.py -> build/lib.linux-x86_64-3.8/urwid
```

---

**Note:** Ensure Python 3.8.0 version should be available in PATH variable. Above execution should be done using Python 3.8.0.

---



Step 4: Execute below command to perform Urwid installation

```
# python3 setup.py install
```

```
bash-4.2# python3 setup.py install
running install
running bdist_egg
running egg_info
writing urwid.egg-info/PKG-INFO
writing dependency_links to urwid.egg-info/dependency_links.txt
writing top-level names to urwid.egg-info/top_level.txt
reading manifest file 'urwid.egg-info/SOURCES.txt'
reading manifest template 'MANIFEST.in'
warning: no files found matching 'CHANGELOG'
writing manifest file 'urwid.egg-info/SOURCES.txt'
installing library code to build/bdist.linux-x86_64/egg
```

---

Note :

- 1) OR you can install urwid from step mention in 2.3 below.
  - 2) Ensure Python 3.8.0 version should be available in PATH variable. Above execution should be done using Python 3.8.0.
-

## 2.3 Python 3.8.0 installation on Linux Operating System

Step 1: Execute below commands to install the dependencies

```
yum -y groupinstall development
yum -y install zlib-devel
yum install openssl-devel -y
yum install zlib-devel bzip2-devel openssl-devel ncurses-devel sqlite-devel
yum install zlib-devel bzip2-devel openssl-devel ncurses-devel sqlite-devel -y
yum install python38-pip -y
yum install libreadline-gplv2-dev libncursesw5-dev libssl-dev libsqlite3-dev tk-dev
libgdbm-dev libc6-dev libbz2-dev -y
yum install -y libffi-devel
yum install python36u-devel -y
yum install python38u-devel -y
yum install yum-utils -y
yum install epel-release -y
yum install python3.8-pip -y
yum install python3-pip -y
```

---

**Note:** In case wget is not installed , perform following step to install wget

---

```
yum install wget
#Download the python.tar.xz of the required version
wget https://www.python.org/ftp/python/3.8.0/Python-3.8.0.tar.xz
#Untar the Python tar file
tar xJf Python-3.8.0.tar.xz
#Navigate to the Python-<version> directory and run the below commands
cd Python-3.8.0
./configure
make
make install
```

Step 2: To install the Python3 compatible libraries to Python2.7 , configuration of pip needs to be done

```
cd /root

mkdir .pip

vi ~/.pip/pip.conf

[global]

trusted-host = pypi.python.org

                pypi.org

                files.pythonhosted.org
```

Step3: Give permission to pip.conf file and a soft link needs to be created.

---

**Note:** pip version 20.1.1

---

```
ln -s ~/.pip/pip.conf /etc/pip.conf

ls -lrt ~/.pip/pip.conf

chmod 777 /root/.pip/pip.conf

ls -lrt ~/.pip/pip.conf

pip3 list

pip3 install --upgrade pip
```

Step4: Once above steps are executed successfully install the following required modules.

```
pip3 install cx-Oracle==8.1.0

pip3 install urwid==2.1.2
```

### **limits.conf (OS Configuration)**

Ensure the nofile resource limit is set 10240 or higher for the user which would execute the OBAPI Installer.

[Home](#)

## 3. Installing and Configuring Weblogic Infrastructure

# 12c

This chapter describes the steps for installing the Weblogic Infrastructure version 12.2.1.4.0:

- Section 3.1, "Installing Stand-alone Weblogic"

### 3.1 Installing Stand-alone Weblogic Infrastructure

Oracle WebLogic Server is a scalable, enterprise-ready Java Platform, Enterprise Edition (Java EE) application server. The WebLogic Server infrastructure supports the deployment of many types of distributed applications

This chapter describes the installation tasks which contains the following sections:

- Section 3.1.1, "Pre-requisite - Installing Java 1.8"
- Section 3.1.2, "Installing Weblogic Infrastructure"
- Section 3.1.3, "Verifying the Installation"

#### 3.1.1 Pre-requisite - Installing Java 1.8

- Obtain the Java tarball pack from the Oracle Java Downloads. Download `jdk-8u281-linux-x64.tar.gz` file to a directory.
- Change the directory in which you want to install,

```
cd <Directory_Path>
```

- Unpack the tarball and install Java using the following command:

```
tar zxvf <Path>/jdk-8u281-linux-x64.tar.gz
```

---

**Note:** You must enter the absolute path of the folder where the TAR file is located.

---

- Now, set the path and environment variable for Java as:

```
export JAVA_HOME=<Java_Install_Path>/jdk1.8.0_281
```

```
export PATH=$JAVA_HOME/bin:$PATH
```

#### 3.1.2 Installing Weblogic

- Obtain Weblogic Infrastructure 12.2.1.4.0 zip from the Oracle Fusion Middleware Downloads. Extract the downloaded zip to get `fmw_12.2.1.4.0_infrastructure.jar` file to a directory.
- Now to start the installer, go to the directory where you have extracted the jar file.
- Start the installer from the same directory using the below command:

```
java -jar <Path>/fmw_12.2.1.4.0_infrastructure.jar
```


---

**Note:** You must enter the absolute path of the folder where the JAR file is located.

---

If you are installing on a UNIX system, and if this is the first time any Oracle product is being installed on your system with the Oracle Universal Installer, you are asked to provide the location of an inventory directory. This is where the installer sets up subdirectories and maintains inventory data for each Oracle product that is installed on this system.

### Installation Inventory Setup Screen

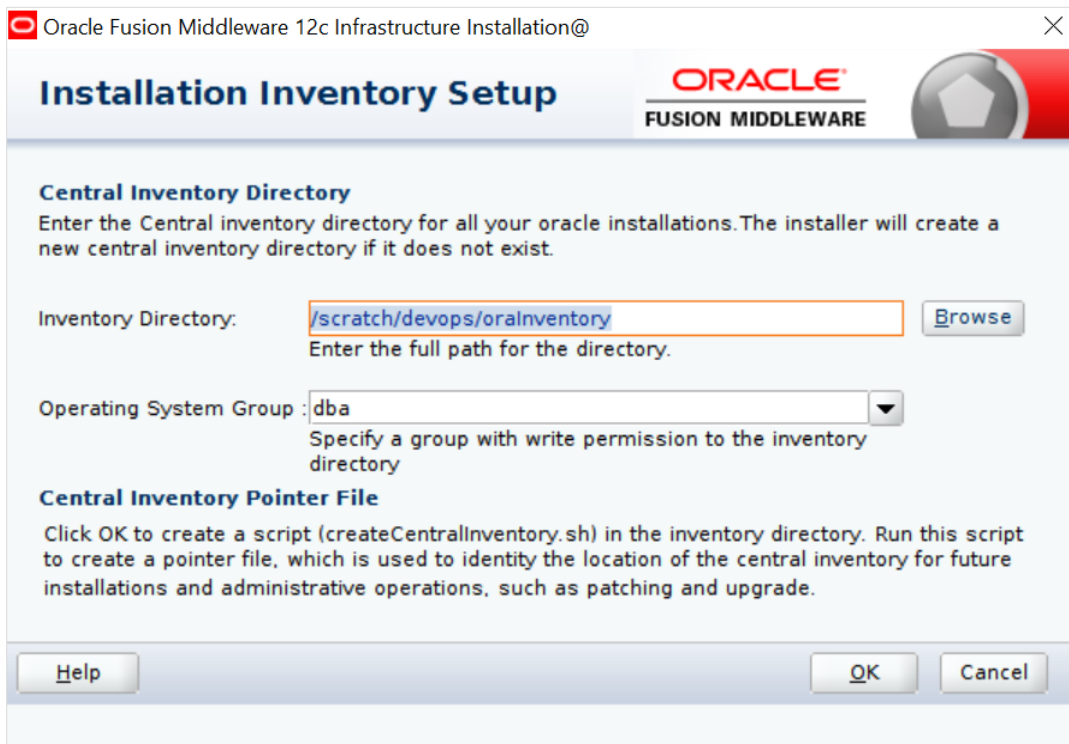

The screenshot shows a window titled "Oracle Fusion Middleware 12c Infrastructure Installation@". The main heading is "Installation Inventory Setup" with the Oracle Fusion Middleware logo. The section "Central Inventory Directory" contains the following text: "Enter the Central inventory directory for all your oracle installations. The installer will create a new central inventory directory if it does not exist." Below this, there is a text input field for "Inventory Directory:" containing the path "/scratch/devops/orainventory" and a "Browse" button. A note below the field says "Enter the full path for the directory." The "Operating System Group:" is set to "dba" in a dropdown menu, with a note: "Specify a group with write permission to the inventory directory". The section "Central Inventory Pointer File" contains the text: "Click OK to create a script (createCentralInventory.sh) in the inventory directory. Run this script to create a pointer file, which is used to identify the location of the central inventory for future installations and administrative operations, such as patching and upgrade." At the bottom, there are "Help", "OK", and "Cancel" buttons.

Specify the Oracle inventory directory and group permissions for that directory. The group must have write permissions to the Oracle inventory directory.

Click **OK** to continue.

## Welcome Screen



The **Welcome** screen is displayed each time you start the installer.

Click **Next** to continue.

## Auto Updates Screen

Oracle Fusion Middleware 12c Infrastructure Installation - Step 2 of 8

**Auto Updates**

ORACLE  
FUSION MIDDLEWARE

Welcome

**Auto Updates**

Installation Location

Installation Type

Prerequisite Checks

Installation Summary

Installation Progress

Installation Complete

Skip Auto Updates

Select patches from directory

Location:


Search My Oracle Support for Updates

Username:

Password:

Select “**Skip Auto Updates**” option and click **Next** to continue. (Kindly follow recommended practices regarding updates depending on the setup requirements or usage.)

## Specify Installation Location Screen

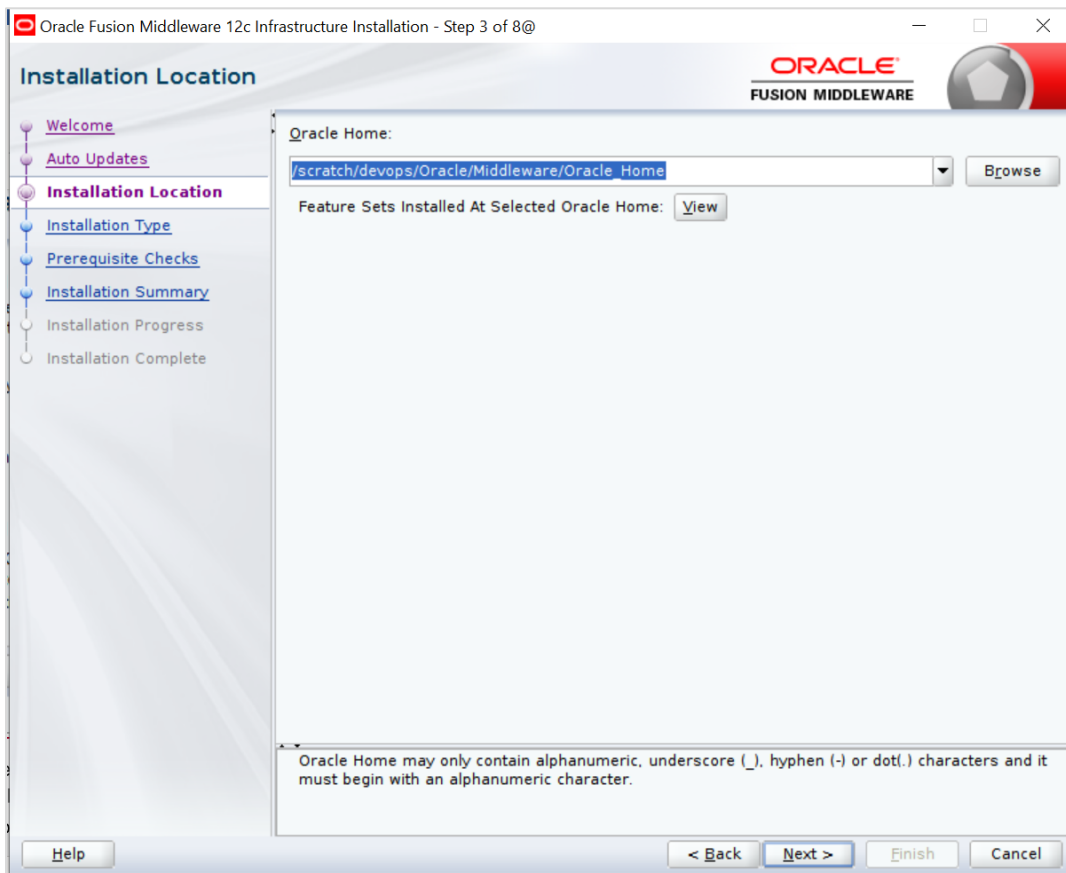

Specify the following installation locations:


- Oracle Middleware Home

This is the absolute path to the directory where the WebLogic Server will be installed.

Click **Next** to continue.



## Specify Installation Type Screen

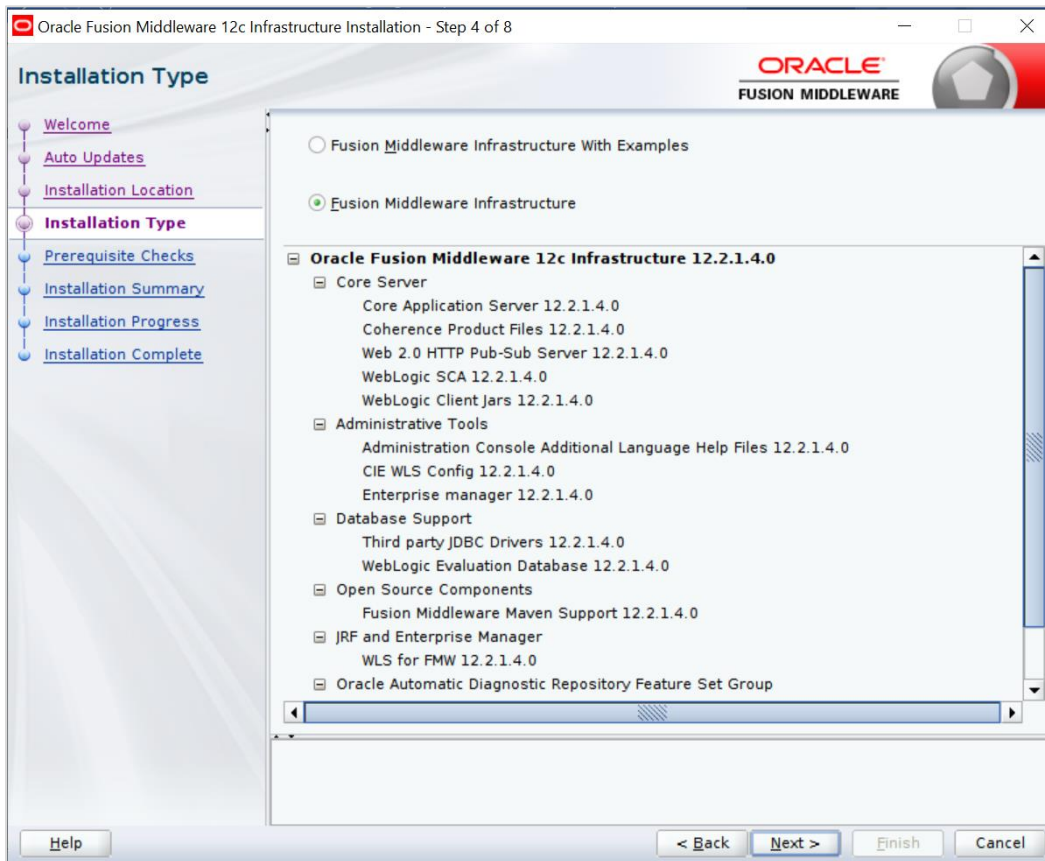


Following are the installation types:

- Fusion Middleware Infrastructure with Examples
- Fusion Middleware Infrastructure

Select Fusion Middleware Infrastructure and Click **Next** to continue.

## Prerequisite Checks Screen

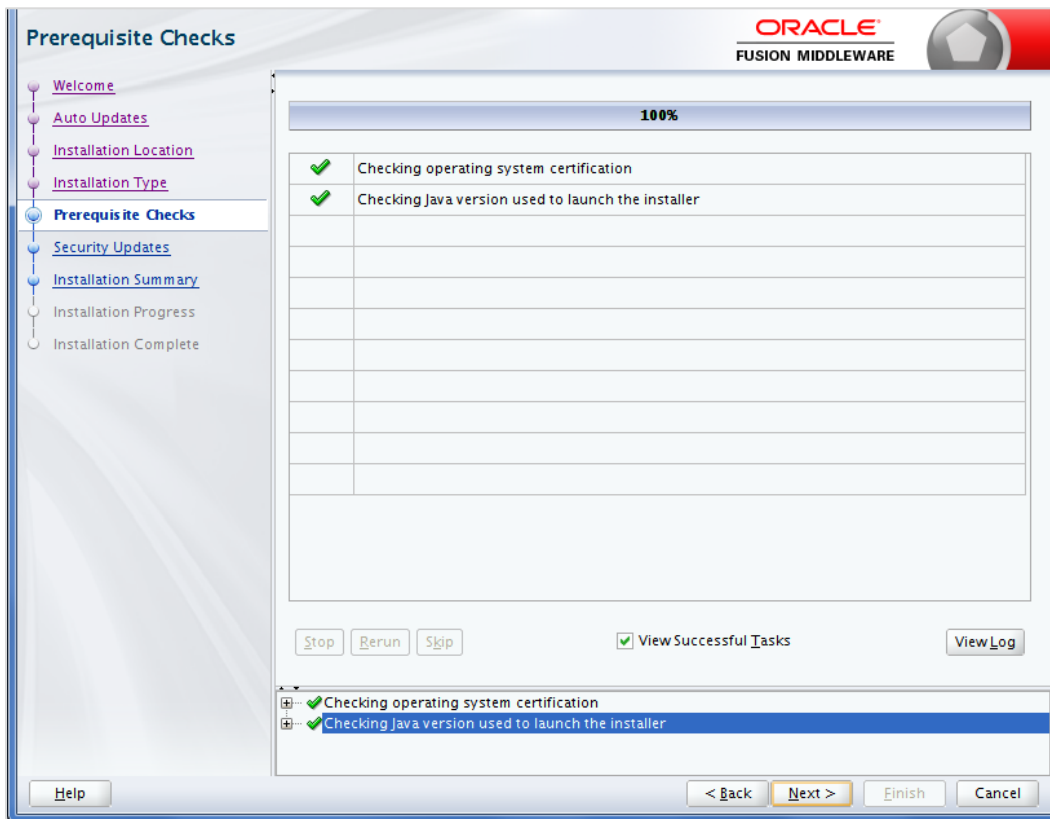


This screen shows whether the system requirements are met in order to install the software.

If there is a problem, a short error message appears in the bottom portion of the screen. Fix the error, and click **Retry** to try again.

Click **Next** to continue.

## Installation Summary Screen

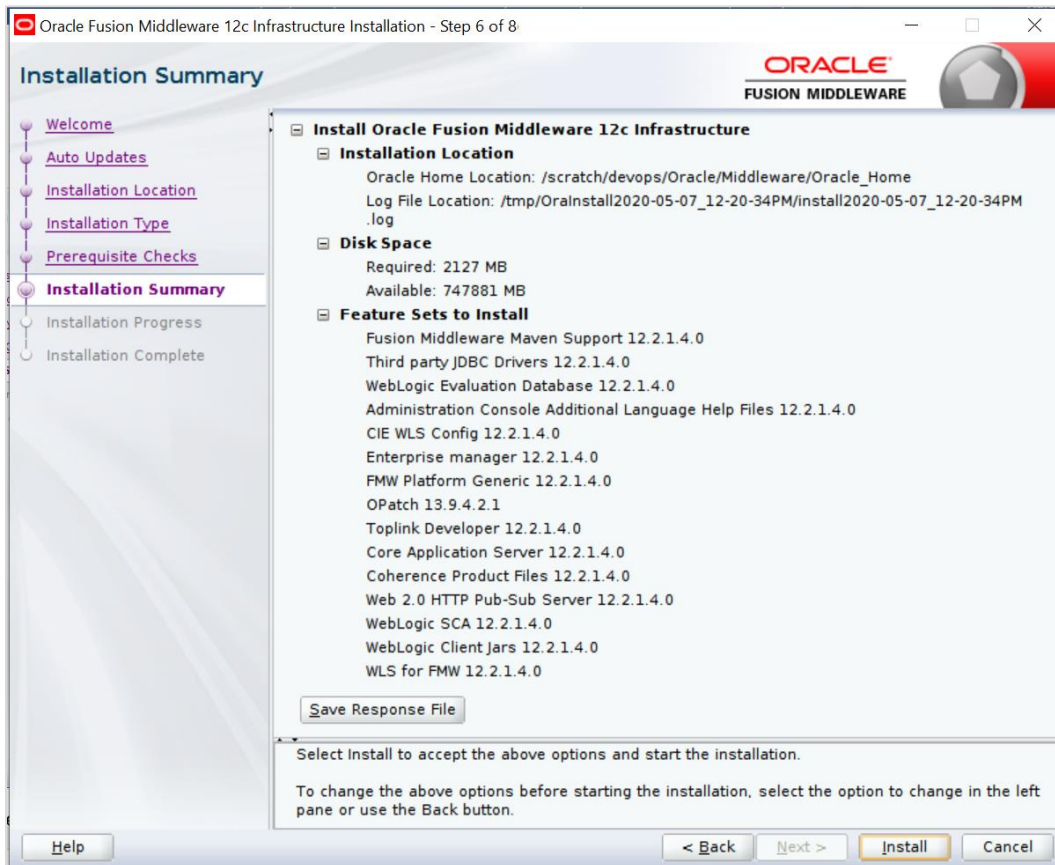

Review the information on this screen. The operations summarized on this page will be performed when you click Install.

If you want to make any changes to the configuration before starting the installation, use the navigation pane, and select the topic you want to edit.

If you want to save this configuration to a text file (called a response file), click Save. You will be prompted for the location of name of the file you want to create (for example, silent\_install.rsp). This file can be used later if you choose to perform the same installation from the command line.

Click **Install**.

Then screen shows the progress of the installation.

## Installation Progress Screen

Oracle Fusion Middleware 12c Infrastructure Installation - Step 7 of 8

**Installation Progress**

ORACLE  
FUSION MIDDLEWARE


31%

✓	<b>Prepare</b>
⌚	Copy
	Generating Libraries
	Performing String Substitutions
	Linking
	Setup
	Saving the inventory
	Post install scripts

View Messages     View Successful Tasks    View Log

**Hardware and Software  
Engineered to Work Together**

Help    < Back    Next >    Finish    Cancel

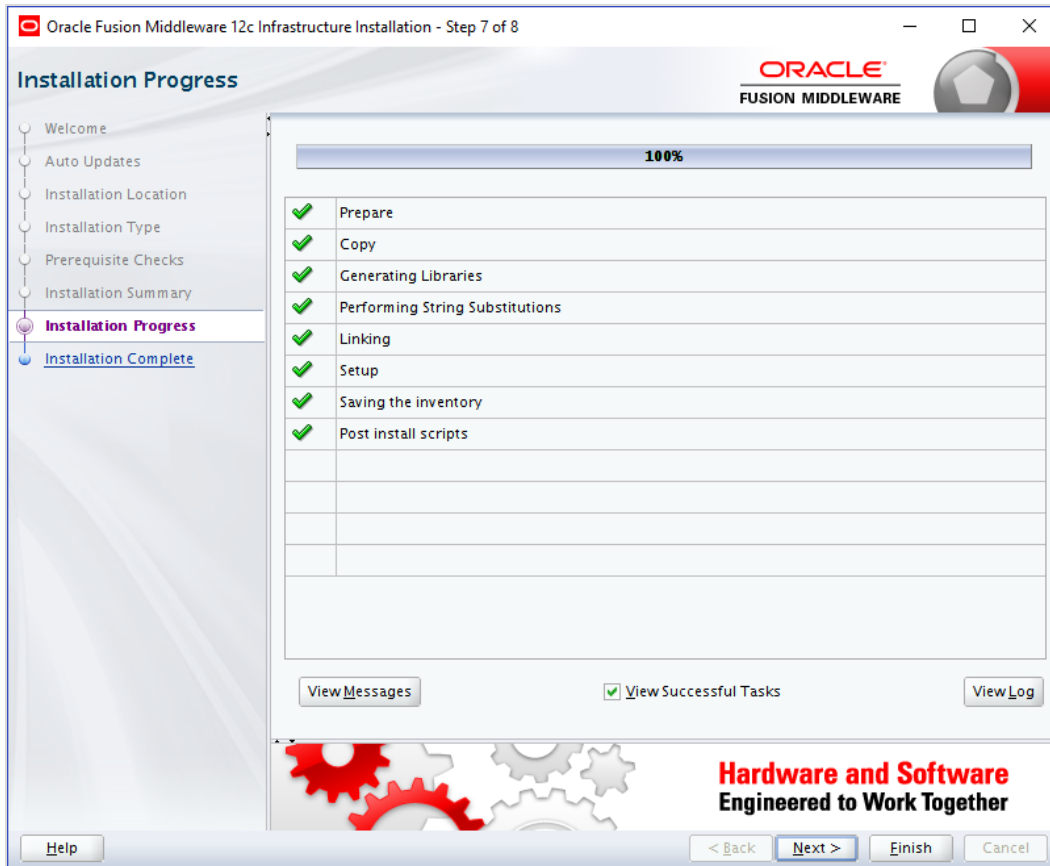

This screen shows the progress of the installation. Click **Next**.

If you want to quit before the installation is completed, click **Cancel**.

## Installation Complete Screen



This screen summarizes the installation that was just completed.

At the end of the summary information, there is a section called Installation Location which states the Oracle Home Location & the Log File Location along with the list of features installed.

Click **Finish**.

### 3.1.3 Verifying the Installation

You can perform the following tasks to verify that your installation was successful:

- Verifying the Installation Logs: Check for the presence of installation log files in logs directory. The location of the file is shown at the end of installation in the Installation Complete Screen.
- Verifying the Installation Directory: Check if Oracle Home directory is exists or not.

[Home](#)

## 4. Oracle HTTP Server Installation

Oracle Webtier is the Web server component for Oracle Fusion Middleware. The Oracle Web Tier installation gives you the option of installing Oracle HTTP Server and Oracle Web Cache. OPMN is installed, by default, and you do not have the option of deselecting this product.

Together, these products are responsible for managing incoming HTTP requests, caching web messages, and sending XML and HTML back to the client. Also, it provides a listener for Oracle WebLogic Server and the framework for hosting static pages, dynamic pages, and applications over the Web. Oracle Web Tier contains the following components:

- **Oracle HTTP Server:**

Oracle HTTP Server (OHS) is an enterprise grade Web Server software - based on open source Apache HTTP Web Server - designed to deliver the following benefits:

- Deliver HTTP Listener for Oracle WebLogic Server through built-in WebLogic Web Server Proxy Plug-In.
  - Deliver Web Server component for Fusion Middleware.
  - Serve static web content such as HTML, JavaScript, Images etc, and dynamic web content built with CGI/FastCGI based applications.
- **Oracle Web Cache:** Oracle Web Cache is a content-aware server accelerator, or reverse proxy, for the Web tier that improves the performance, scalability, and availability of Web sites that run on Oracle HTTP Server. Oracle Web Cache is the primary caching mechanism provided with Oracle Fusion Middleware. Caching improves the performance, scalability, and availability of websites that run on Oracle WebLogic Server by storing frequently accessed URLs in memory.

There are different Methods to install Webtier. An Oracle Web Tier solution can be built in one of the following ways:

- **In stand-alone mode:** Oracle Web Tier is configured without a domain, and administered from the command line. See Section 1.3.1 for an overview of the installation procedure.
- **Using Oracle Enterprise Manager Fusion Middleware Control:** In order to use the Oracle Enterprise Manager Fusion Middleware Control, WebLogic Server domain needs to be configured using both the Enterprise Manager and the Java Required Files (JRF) domain templates.

Here, we install Oracle Web Tier in stand-alone mode and following are the sections lists the steps for it:

- Section 4.1, "Installing and Configuring Oracle HTTP Server (Webtier)"
- Section 4.2, "Verifying the Installation"


### 4.1 **Installing and Configuring Oracle HTTP Server (OHS)**

Obtain Oracle Web Tier from the Oracle Fusion Middleware Downloads. Download webtier.zip file to a directory, and unpack the downloaded archive that contains the installer.

To start the installer, go to the directory where you unpacked the archive file. Now, start the installer using the below command:

`./fmw_12.2.1.4.0_ohs_linux64.bin` Now, follow the instructions as shown below to install Webtier,

### Specify Inventory Directory Screen

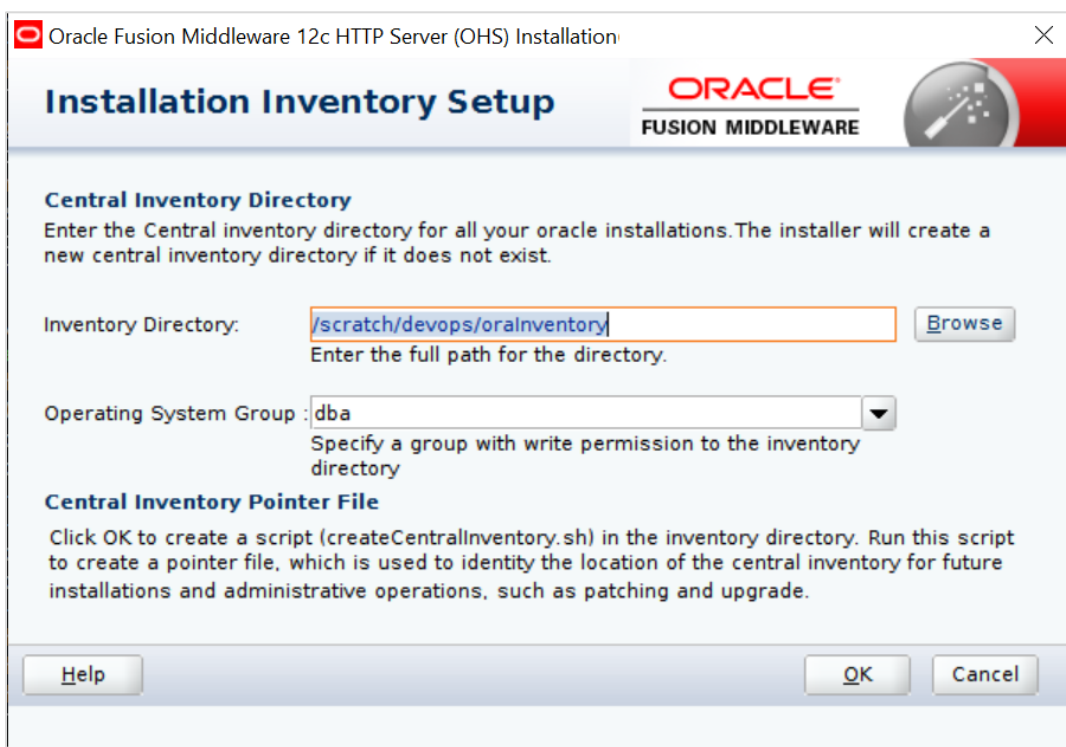

This screen appears for UNIX systems only; if this is your first Oracle installation on this host, you must specify the location of the inventory directory. This inventory directory is used by the installer to keep track of all Oracle products installed on the computer. The default inventory location is `USER_HOME/orainventory`.

In the Operating System Group name field, select the group whose members you want to grant access to the inventory directory; all members of this group will be able to install products on this system. Click **OK** to continue.



## Welcome Screen



The **Welcome** screen is displayed each time you start the installer.

Click **Next** to continue.

## Install Software Updates Screen

Oracle HTTP Server Installation - Step 2 of 9

**Auto Updates**

ORACLE  
FUSION MIDDLEWARE

Welcome

**Auto Updates**

Installation Location

Installation Type

JDK Selection

Prerequisite Checks

Installation Summary

Installation Progress

Installation Complete

Skip Auto Updates

Select patches from directory

Location:


Search My Oracle Support for Updates

Username:

Password:

Select “Skip Software Updates” and Click **Next** to continue. (Kindly follow recommended practices regarding updates depending on the setup requirements or usage.)


## Select Installation Location

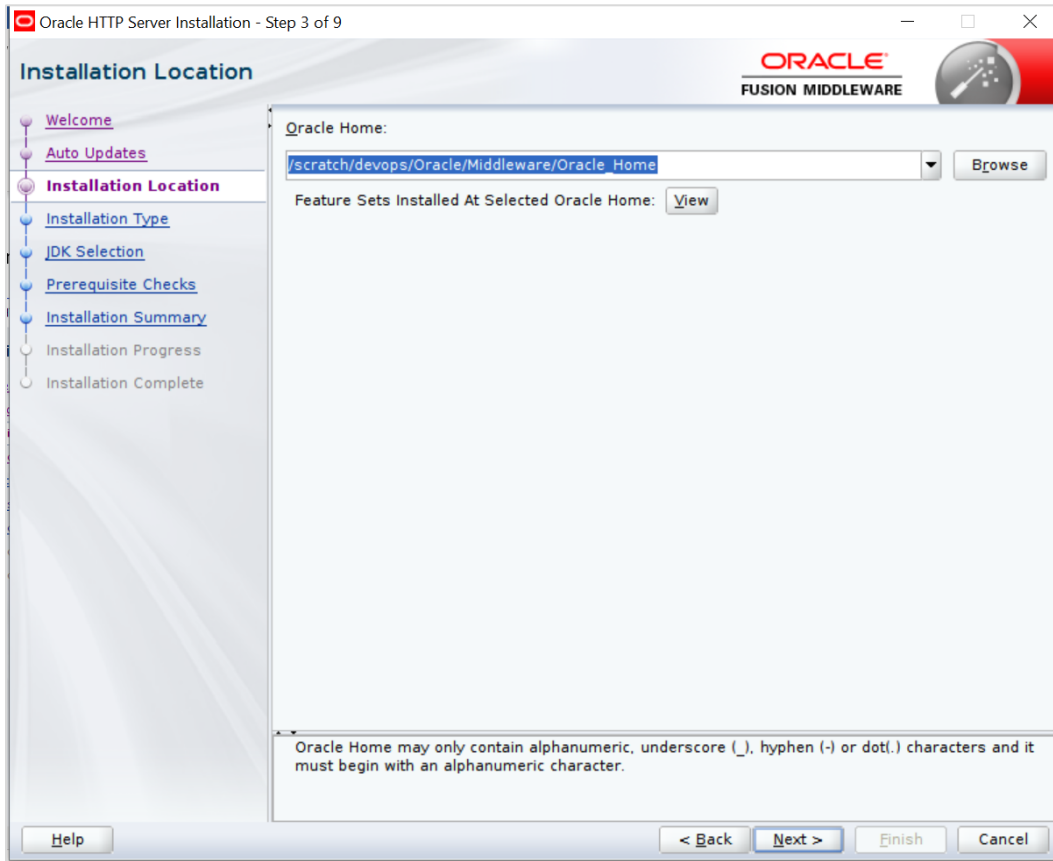

Specify the following installation locations:

- Oracle Middleware Home: The absolute path to the directory where Oracle HTTP Server will be installed.

## Select Installation Type Screen

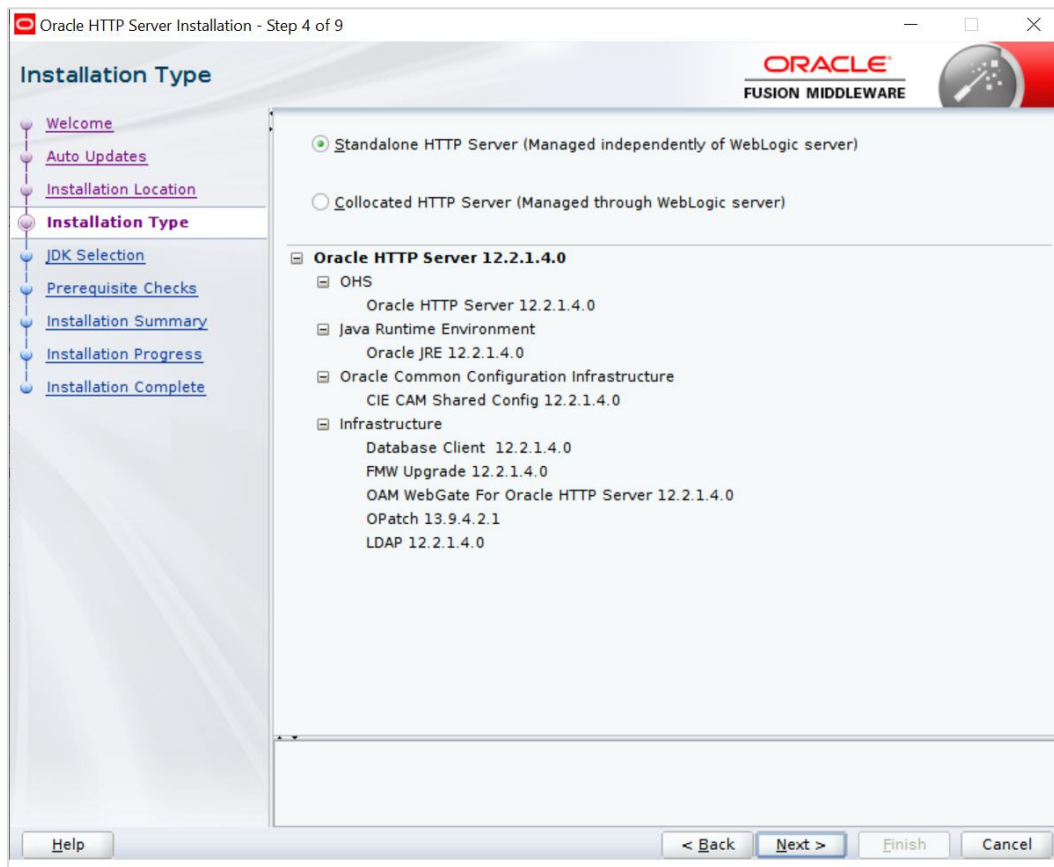


The following are the Installation Types available.

- Standalone HTTP Server (Managed Independently of Weblogic Server) Collocated HTTP Server (Managed through Weblogic server)


Choose installation type as per requirement. Select Standalone HTTP Server (Managed Independently of Weblogic Server). Click **Next** to continue.

Select JDK home

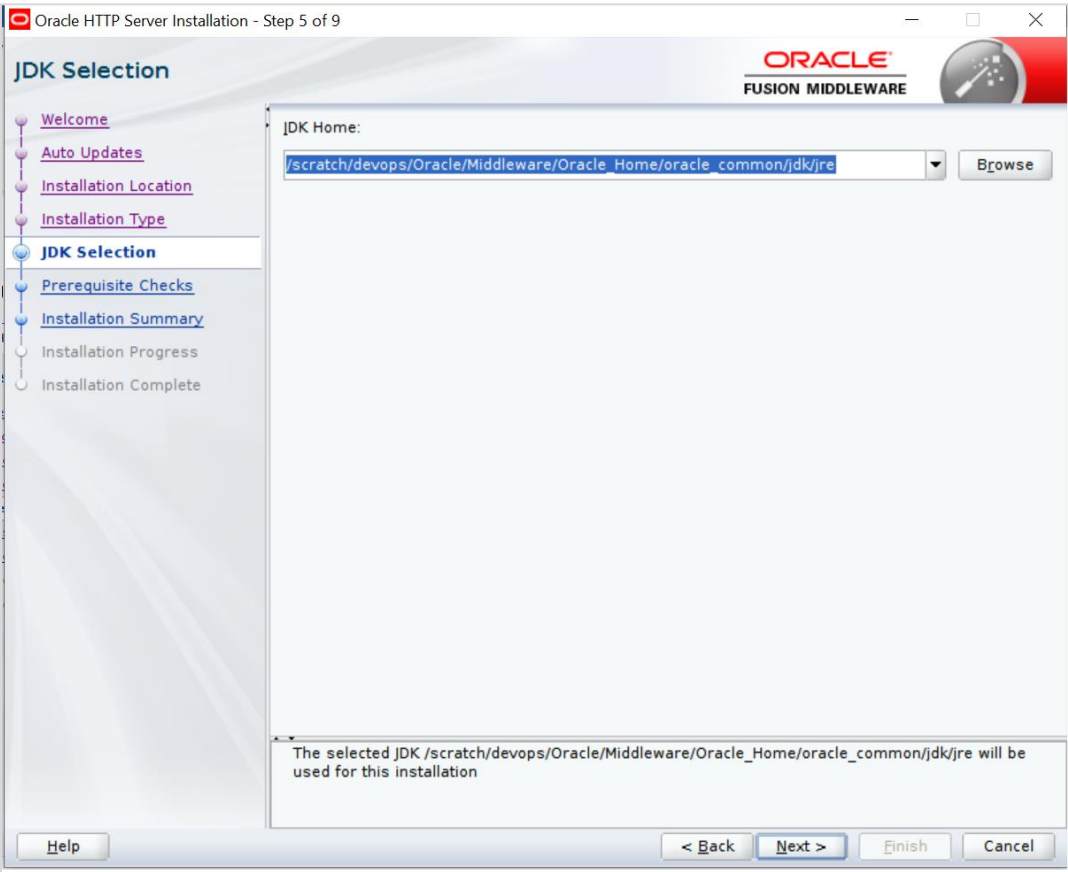

Click **Next** to continue

### Prerequisite Checks Screen

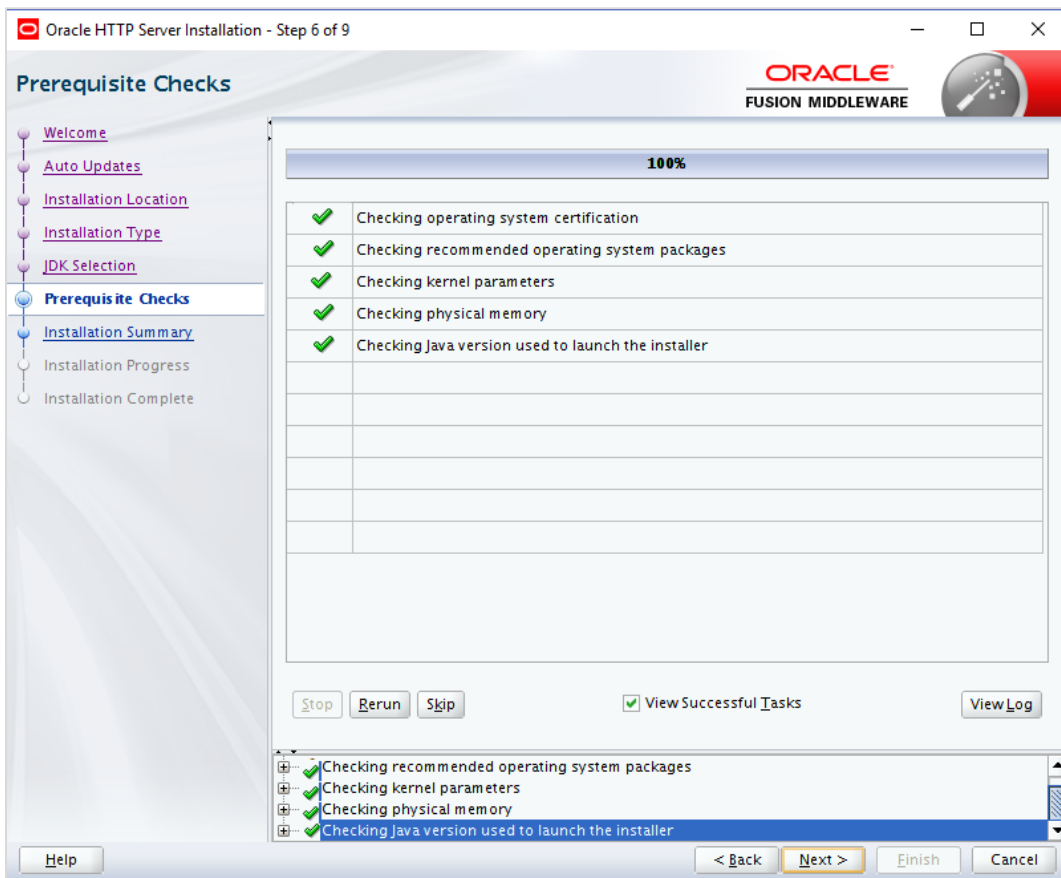


This screen shows whether the system requirements are met in order to install the software.

If there is a problem, a short error message appears in the bottom portion of the screen. Fix the error, and click **Retry** to try again.

Click **Next** to continue.

## Installation Summary

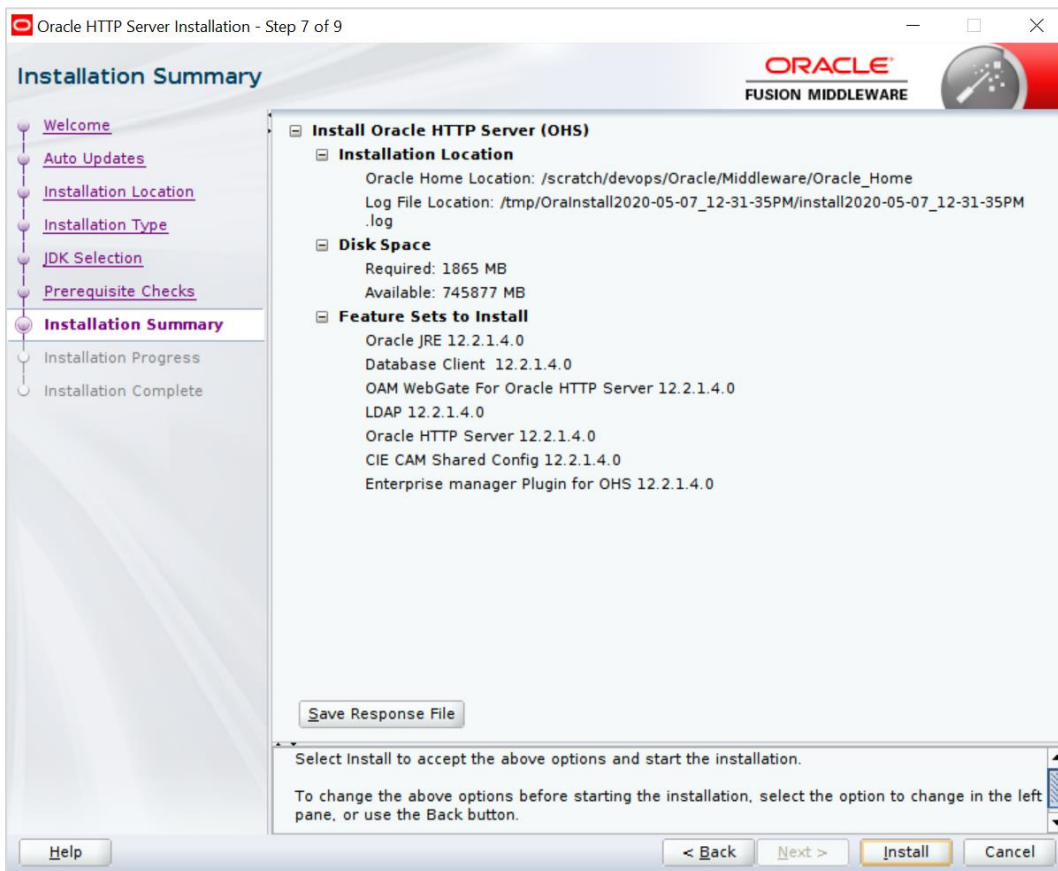


Review the information on this screen. The operations summarized on this page will be performed when you click Install.

If you want to make any changes to the configuration before starting the installation, use the navigation pane, and select the topic you want to edit.

If you want to save this configuration to a text file (called a response file), click Save. You will be prompted for the location of name of the file you want to create (for example, silent\_install.rsp). This file can be used later if you choose to perform the same installation from the command line.

Click **Install**.

## Installation Progress Screen

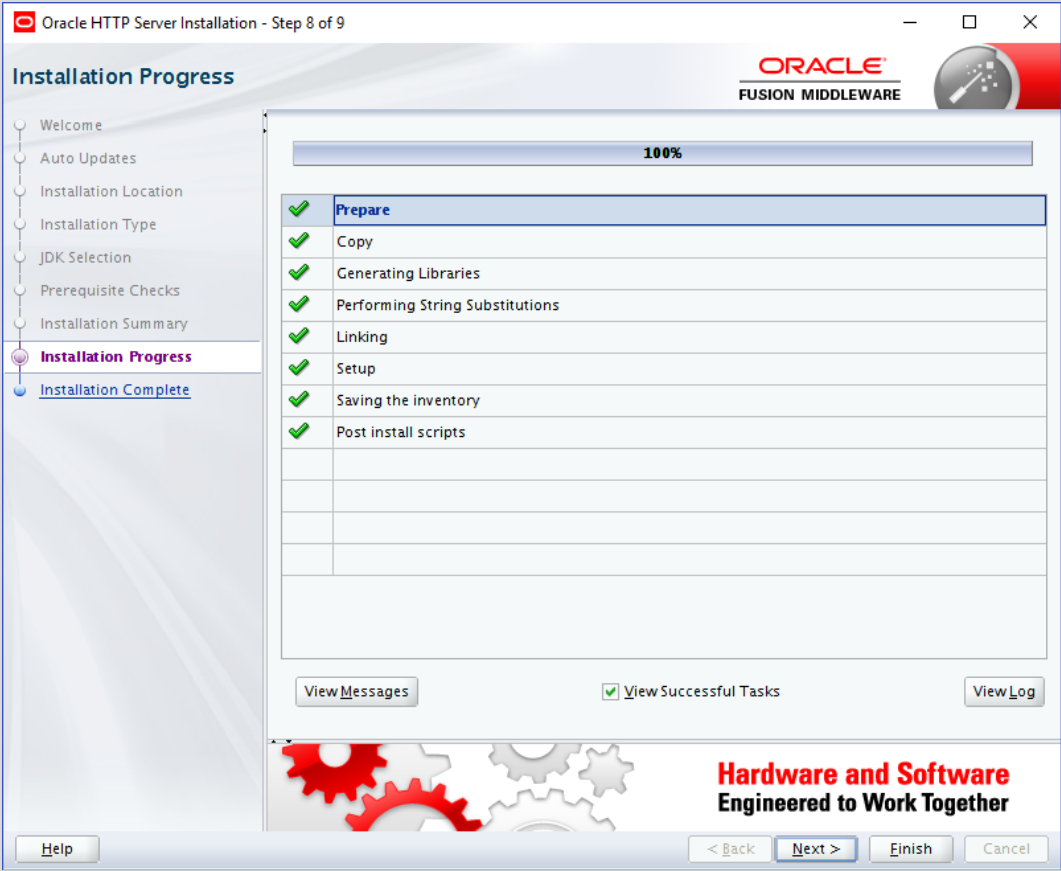


This screen shows the progress of the installation.

If you want to quit before the installation is completed, click Cancel.

Click **Next**.



### Installation Complete Screen

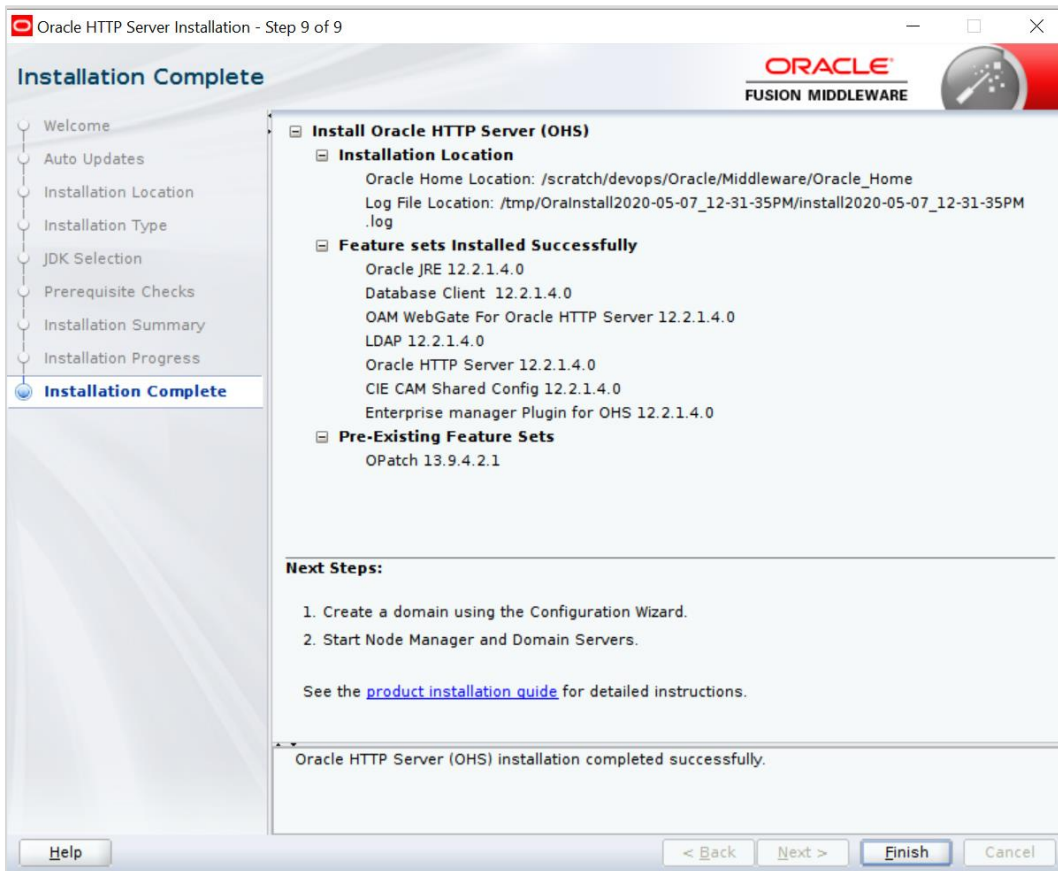

This screen summarizes the installation that was just completed.

Click **Finish** to dismiss the screen.


## Configure the HTTP server

Follow below steps to configure domain for HTTP server


1. Browse <Middleware\_Home>/oracle\_common/common/bin directory
2. Execute below command

```
./config.sh
```


Below screen will be displayed

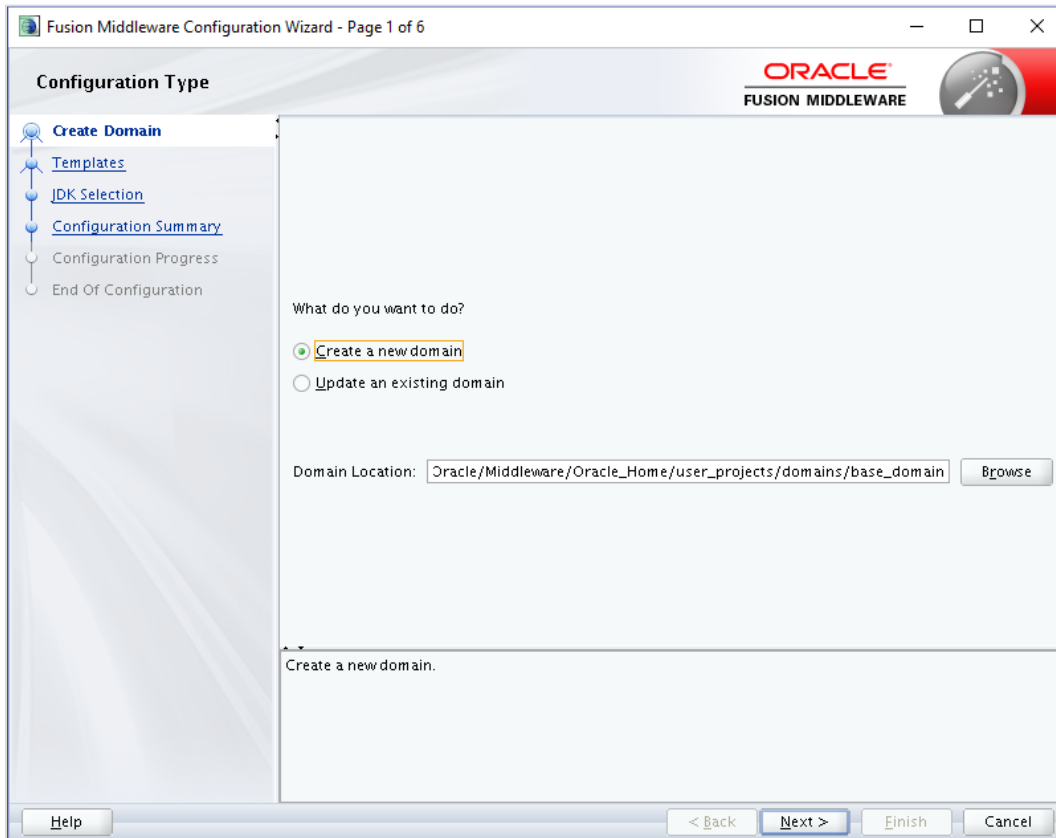


3. Select "Create a new domain" option and select Domain location. Click **Next**.

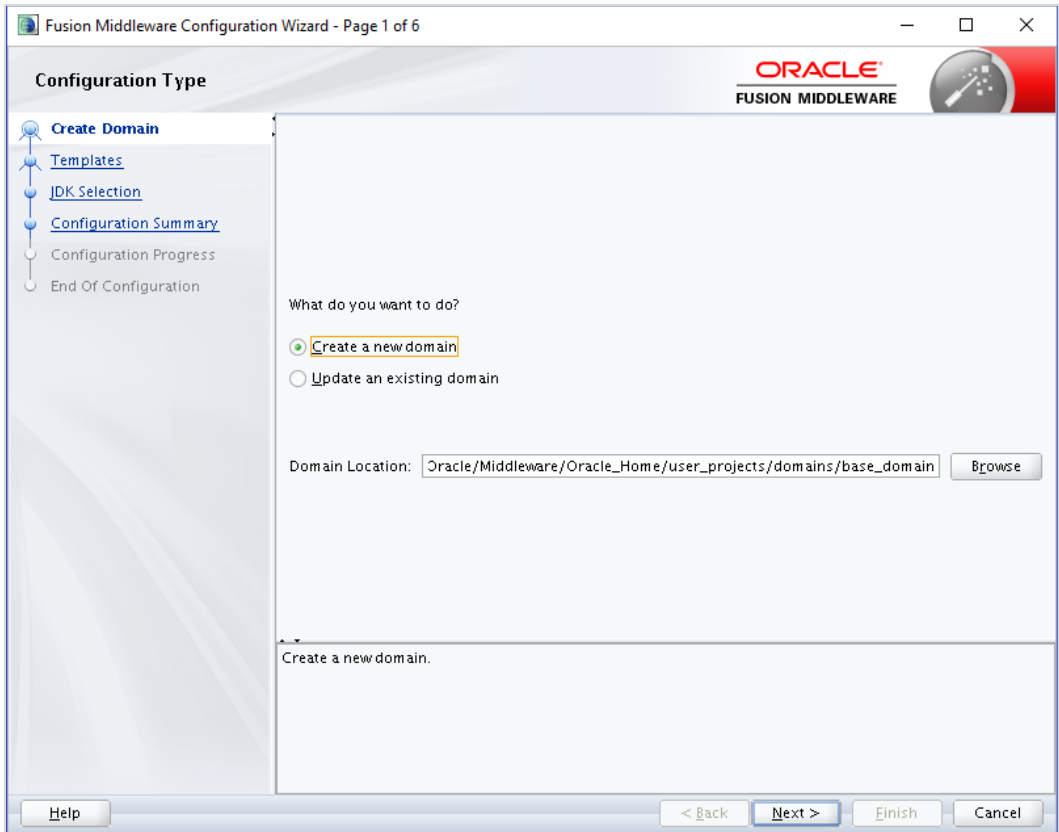

4. Select Oracle HTTP Server option and click Next

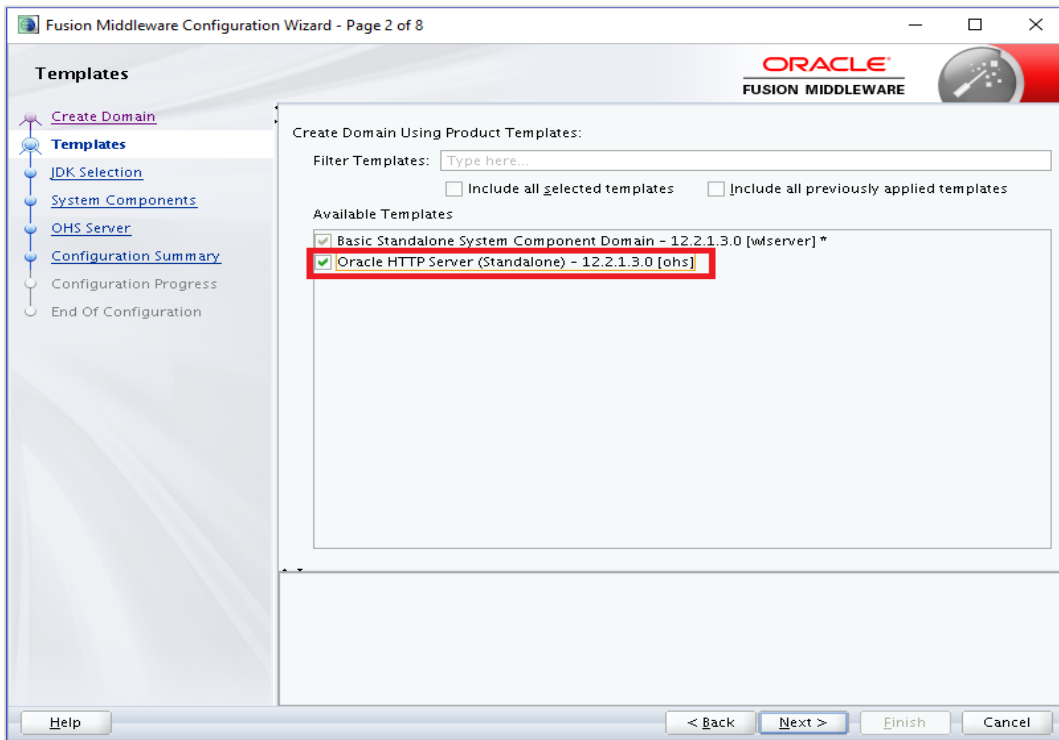

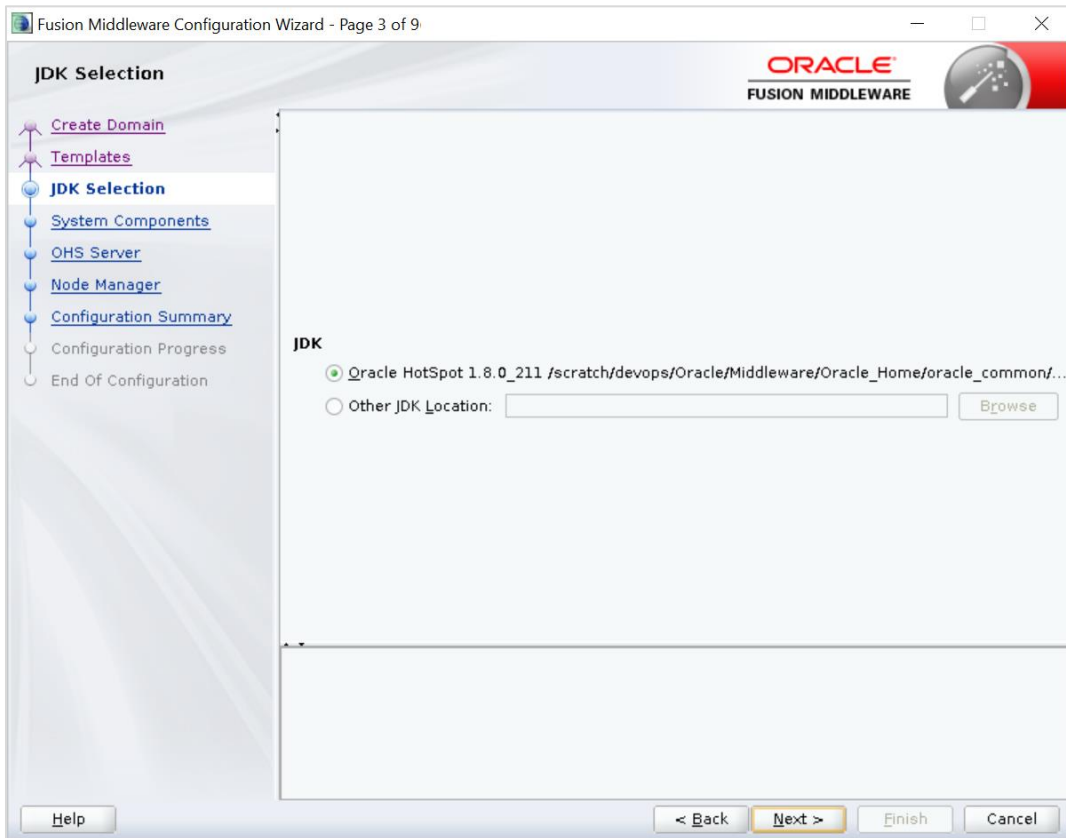
5. Click **Next**.6. Enter below details and click **Next**.

System Component: Set the Instance name


Component Type: Should be OHS

Restart Interval Seconds: Set as per requirement. Defaults to 3600


Restart Delay Seconds: Set as per requirement. Defaults to 0

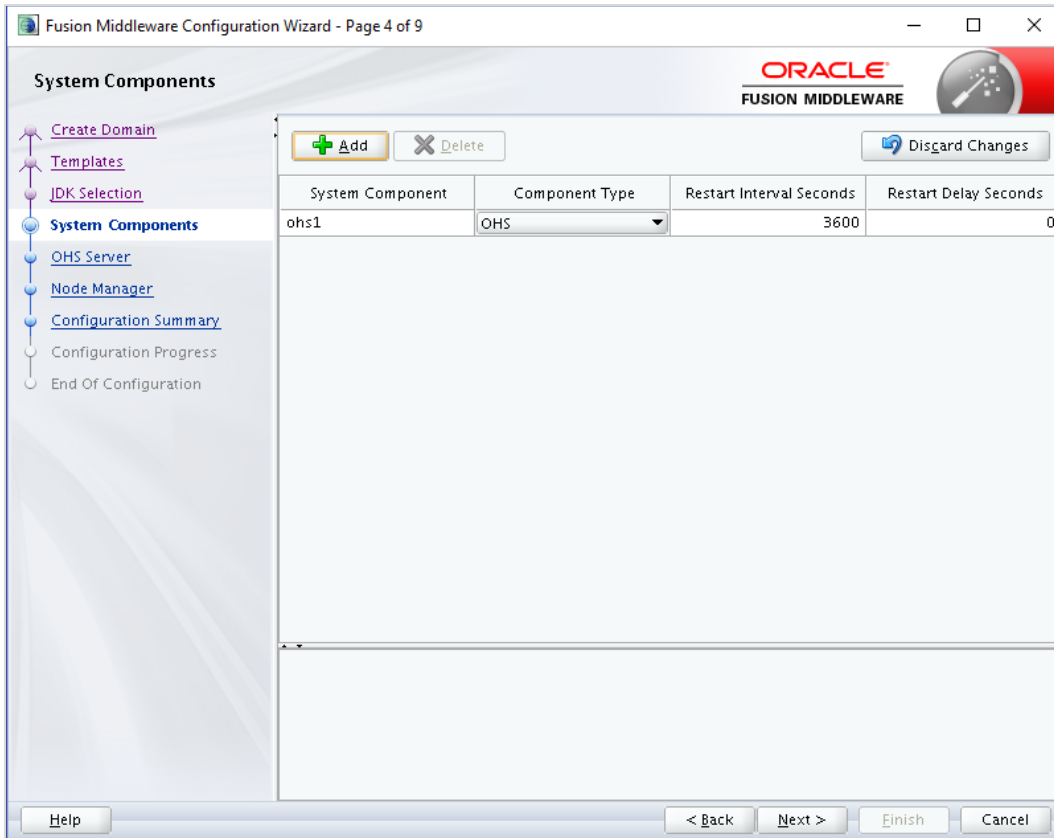


7. Configure Admin Host; Port; Listen Address and click **Next**.

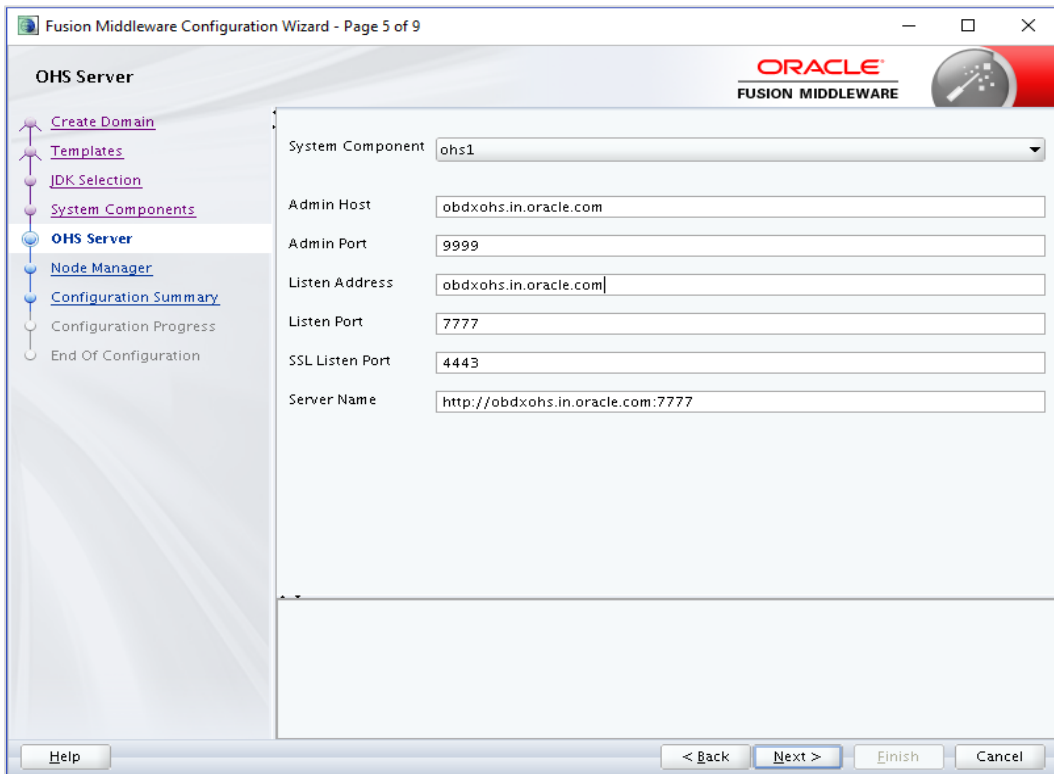



8. Select appropriate Node Manager Type; and enter Node Manager Credentials. Click **Next**.

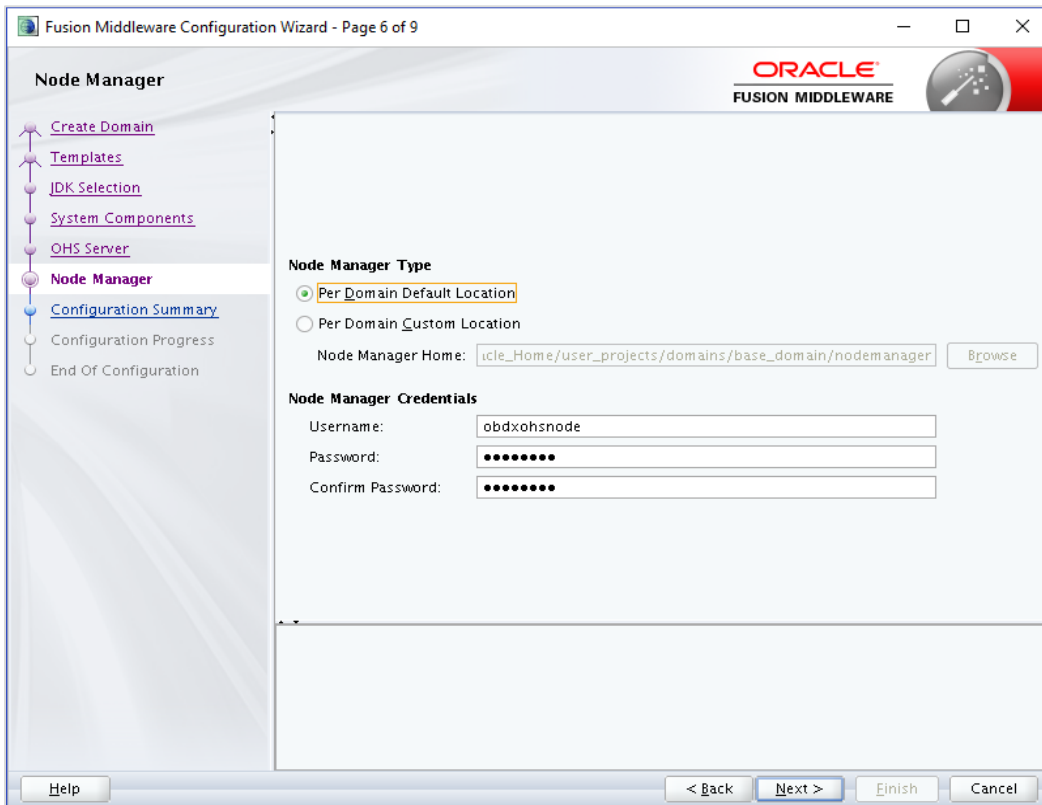


9. Review summary and click **Create**.

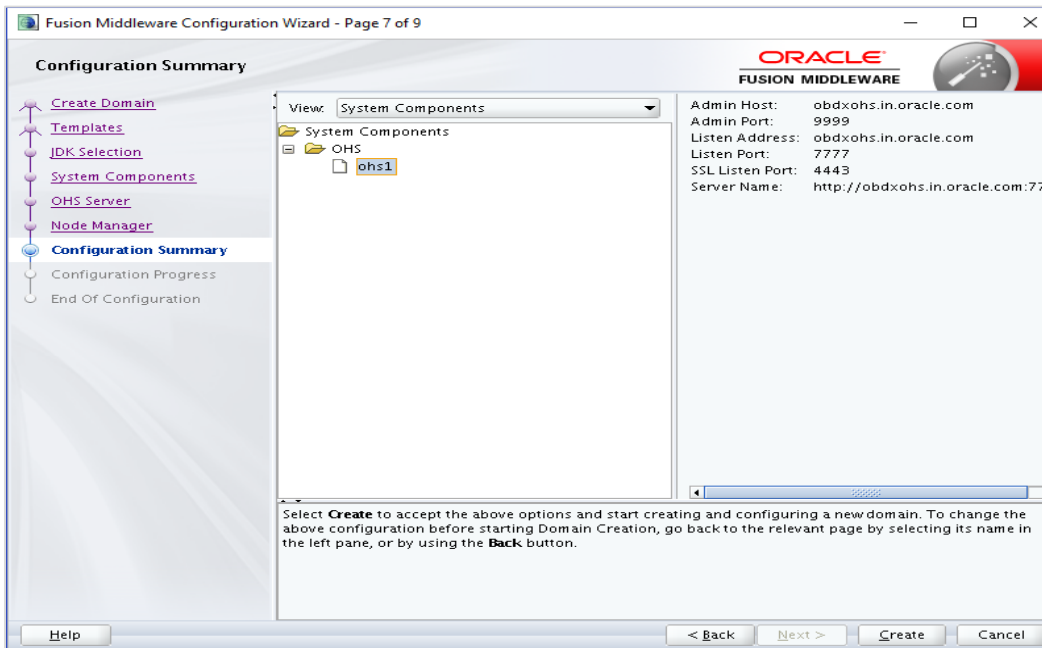

10. Below installation progress can be seen

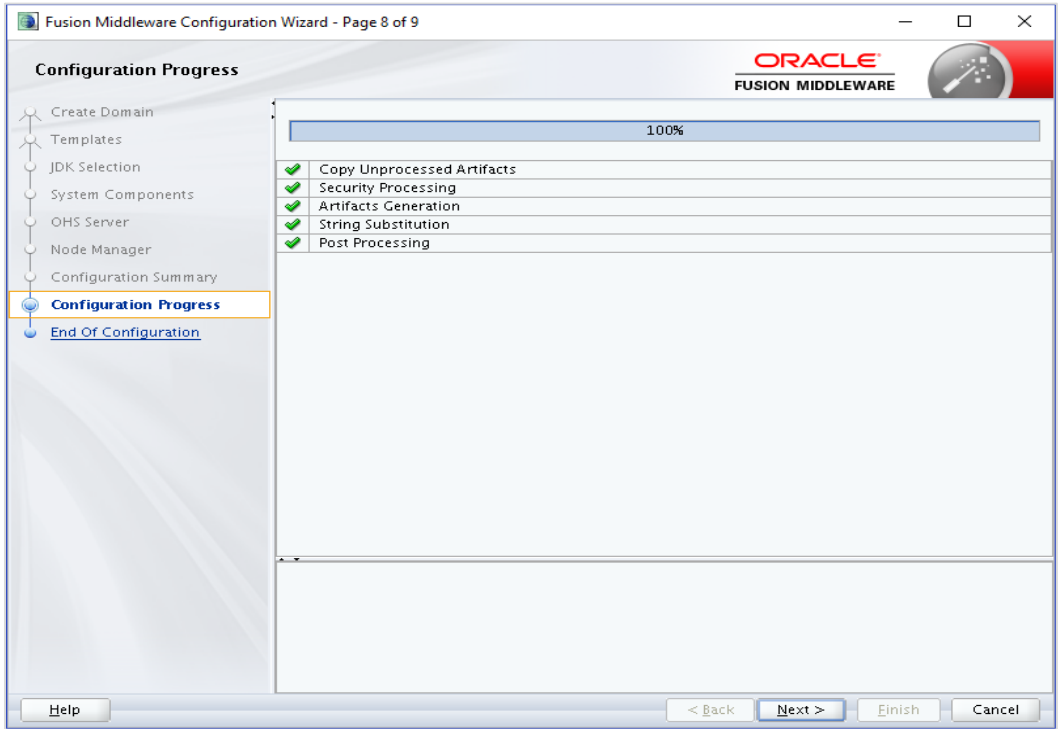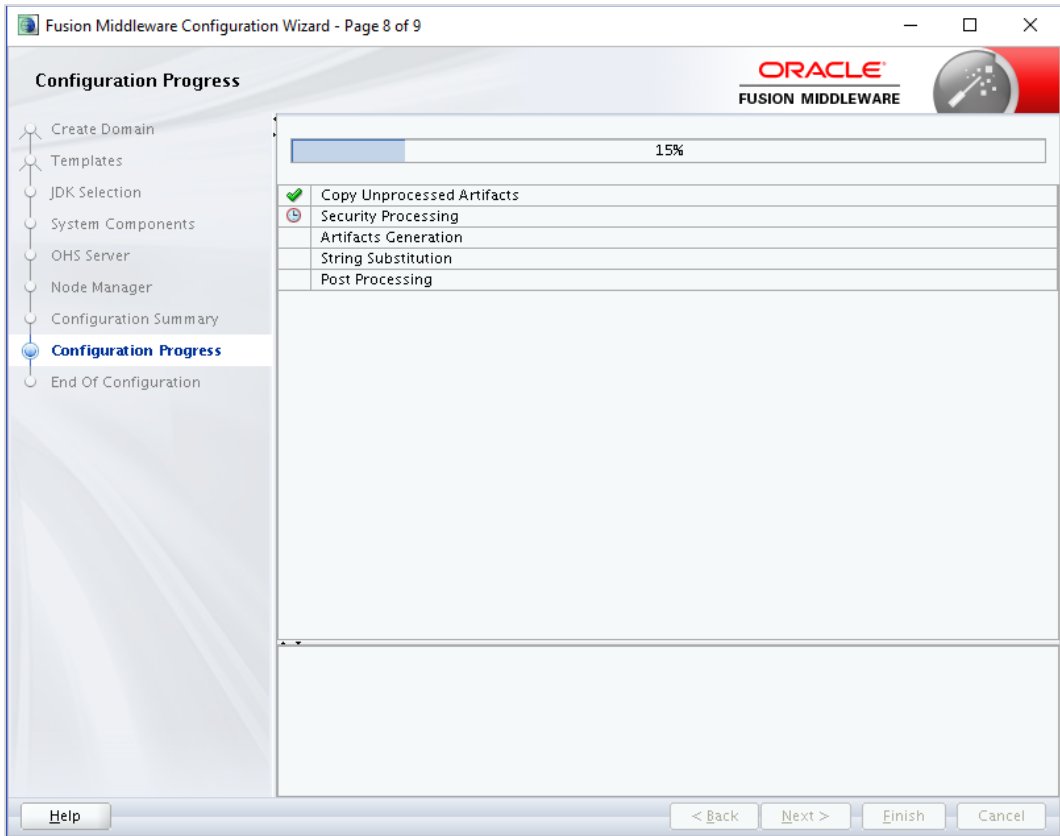

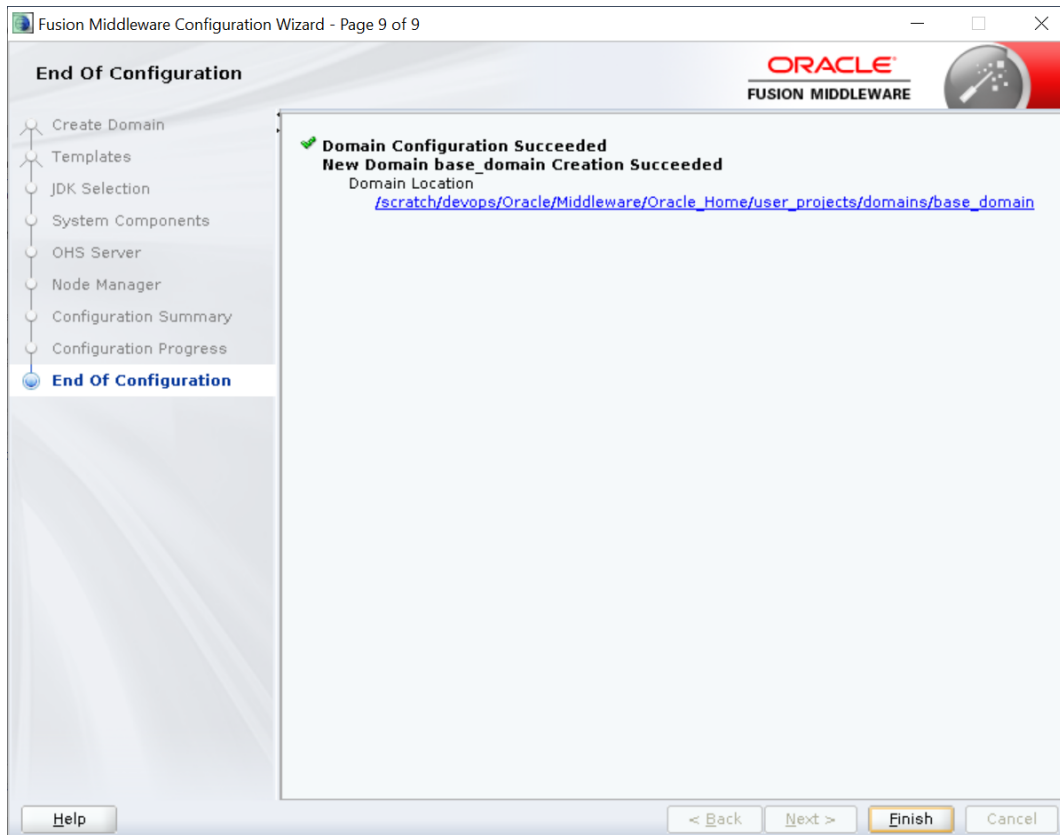

## 4.2 Verifying the Installation

You can perform following tasks to verify that your installation was successful:

- **Verifying the Installation Logs:** Verify the installation logs using the Log file location available in installation complete screen (or <User home dir>/oraInventory/logs).
- **Verifying the OPMN Status:** Run the below commands from the <Domain\_directory>/bin directory on UNIX, in your instance home location. For example:

- **Start NodeManager**

```
cd
/scratch/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/bin
```

```
./startNodeManager.sh
```

- **Start component**

```
./startComponent.sh ohs1
```

Use the listen port number to point your browser to the HTTP server to test installation. Use the format:



**http://<HTTPSERVERHOSTNAME>:<HTTPSERVERLISTENPORT>**

Oracle HTTP Server 12c

Oracle HTTP Server 12c is based on the proven, open source Apache HTTP Server technology and provides the framework for hosting static, dynamic web pages and for front-ending Oracle Fusion Middleware Applications.

**Features**

- Content Serving / Reverse Proxy**
  - Cloud Deployment / Virtual Server Support**  
Thousands of sites / application domains served from a single web server instance. Each virtual server can have its own configuration files, IP addresses, port, document root, preferences, log files, and more.
  - Protection From Common Threats**  
Built-in ModSecurity module provides the ability to configure rules to intercept and protect applications from common attacks including SQL/Command injection, Cross Site Scripting vulnerabilities and other vulnerabilities.
  - FastCGI Support**  
Efficient way to serve dynamic content web pages without OHS by using scripting languages such as PHP or Python, without incurring a significant performance penalty.
  - Integrated Reverse Proxy**  
Efficient way to serve dynamic content web pages without OHS by using scripting languages such as PHP or Python, without incurring a significant performance penalty.

**Administration / Monitoring**

- Server Administration**  
Leverages WebLogic 12c administration interface to provide a simple, consistent and distributed administration model for administering Oracle HTTP Server, Oracle WebLogic Server and the rest of the Fusion Middleware Stack.  
For more information, please refer to [Load Balancing the OHS Administration Guide](#) section.
- Monitoring**  
Integration with Oracle Enterprise Manager allows customers to monitor HTTP traffic by using the Oracle Enterprise Management console.
- Subset Migration Tool**  
Integrated migration tools make it easy to migrate existing Oracle HTTP Server 11g deployments to Oracle HTTP Server 12c.

[Home](#)

## 5. Oracle HTTP Server Webgate Installation and Configuration

A WebGate is a web-server plug-in for Oracle Access Manager (OAM) that intercepts HTTP requests and forwards them to the Access Server for authentication and authorization.

Installing a WebGate for Oracle Access Manager involves the following steps:

- Section 5.1, "Configuring Oracle Webgate"
- Section 5.2, "Post-Installation Steps for Oracle HTTP Server WebGate"
- Section 5.3, "Verifying the Installation and Configuration of Oracle HTTP Server WebGate"
- Section 5.4, "Registering the New Oracle HTTP Server 12c WebGate"

### 5.1 Configuring Oracle Webgate

You must complete the following steps after installing Oracle HTTP Server for Oracle Access Manager:

- Go to the `Oracle_Home/webgate/ohs/tools/deployWebGate` directory by running the following command:

```
cd
/scratch/devops/Oracle/Middleware/Oracle_Home/webgate/ohs/tools/deployWebGate
```

- Run the following command to copy the required bits of agent from the `Oracle_Home` directory to the `OHS_Master_Config_Directory` location:

```
./deployWebGateInstance.sh -w OHS_Master_Config_Directory -oh Oracle_Home
```

For .e.g:

```
./deployWebGateInstance.sh -w
/scratch/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/components/OHS/ohs1 -oh
/scratch/devops/Oracle/Middleware/Oracle_Home
```

```
deployWebGate]$ ./deployWebGateInstance.sh -w /scratch/devops/Oracle/Middleware/Oracle_Home/user_projects/d
omains/base_domain/config/fmwconfig/components/OHS/ohs1 -oh /scratch/devops/Oracle/Middleware/Oracle_Home
Copying files from WebGate Oracle_Home to WebGate Instancedir
```

In this command:

`Oracle_Home` is the directory in which you have installed Oracle HTTP Server WebGate.  
Example: `/scratch/devops/Oracle/Middleware/Oracle_Home`

`OHS_Master_Config_Directory` is the location of the directory where the main Oracle HTTP Server configuration files are kept.

Example:

/scratch/devops/Oracle/Middleware/Oracle\_Home/user\_projects/domains/base\_domain/config/fmwconfig/components/OHS/ohs1 Run the following command to ensure that the LD\_LIBRARY\_PATH variable contains Oracle\_Home\_for\_Oracle\_HTTP\_Server/lib:

**export LD\_LIBRARY\_PATH=\$LD\_LIBRARY\_PATH:Oracle\_Home/lib** From your present working directory, move to directory:

```
cd Oracle_Home/webgate/ohs/tools/setup/InstallTools
```

**cd**

**/scratch/devops/Oracle/Middleware/Oracle\_Home/webgate/ohs/tools/setup/InstallTools/**On the command line, run the following command to copy the **apache\_webgate.template** file from the **Oracle\_Home** directory to the main Oracle HTTP Server configuration directory (re-named to **webgate.conf**) and update the **httpd.conf** file to add one line to include the name of **webgate.conf**: **./EditHttpConf -w OHS\_Master\_Config\_Directory [-oh Oracle\_Home] [-o output\_file]**

**For e.g.:**

```
./EditHttpConf -w  
/scratch/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/components/OHS/ohs1 -oh  
/scratch/devops/Oracle/Middleware/Oracle_Home
```

```
InstallTools]$ ./EditHttpConf -w /scratch/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/components/OHS/ohs1 -oh /scratch/devops/Oracle/Middleware/Oracle_Home
The web server configuration file was successfully updated
/scratch/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/components/OHS/ohs1/httpd.conf has been backed up as /scratch/devops/Oracle/Middleware/Oracle_Home/user_projects/domains/base_domain/config/fmwconfig/components/OHS/ohs1/httpd.conf.ORIG
```

In this command:

**Oracle\_Home** is the directory in which you have installed Oracle HTTP Server WebGate for Oracle Access Manager. Example: **/scratch/devops/Oracle/Middleware/Oracle\_Home**

**OHS\_Master\_Config\_Directory** is the location of the directory where the main Oracle HTTP Server configuration files are kept. Example: **/scratch/devops/Oracle/Middleware/Oracle\_Home/user\_projects/domains/base\_domain/config/fmwconfig/components/OHS/ohs1**

**output\_file** is the name of the WebGate configuration file generated by the tool. A default **webgate.conf** file is generated if you do not specify this option. Example: **webgate.conf**

---

**Note:** The -oh Oracle\_Home and -o output\_file parameters are optional.

---

## **5.2 Verifying the configuration of Oracle HTTP Server 12c WebGate**

After installing Oracle HTTP Server 12c WebGate for Oracle Access Manager and completing the configuration steps, you can examine the `installDATE-TIME_STAMP.out` log file to verify the installation. The default location of the log are as follows: The default location of the log is : `Oracle_Home/oraInst.loc`

## **5.3 Registering the New Oracle HTTP Server 12c WebGate**

Before you can use the new Oracle HTTP Server 12c WebGate agent for Oracle Access Manager, you must register the new WebGate agent with Oracle Access Manager by using the Oracle Access Manager Administration Console.

Refer to the Section 8.1 “Creating WebGate Agent on OAM Console” under Oracle Access Management Configuration chapter.

[Home](#)

---

## 6. Oracle Analytics Publisher Installation

To install Oracle Analytics Publisher Installation refer  
<https://docs.oracle.com/en/middleware/bi/analytics-server/index.html>

[Home](#)