

Oracle® Web Publishing Assistant

Getting Started

Release 8.0.6 for Windows NT

May, 1999

Part No. A69526-01

ORACLE®

Oracle Web Publishing Assistant Getting Started, Release 8.0.6

Part No. A69526-01

Copyright © 1996, 1999, Oracle Corporation. All rights reserved.

Contributors: Eric Belden, Eric Esselink, Michael Hussey, Churn-Der Hwang, Greg Ishii, Tina Tang Marc, Lynn Murphy, Chris Tow, Helen Slattery

The Programs (which include both the software and documentation) contain proprietary information of Oracle Corporation; they are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright, patent, and other intellectual and industrial property laws. Reverse engineering, disassembly, or decompilation of the Programs is prohibited.

The information contained in this document is subject to change without notice. If you find any problems in the documentation, please report them to us in writing. Oracle Corporation does not warrant that this document is error free. Except as may be expressly permitted in your license agreement for these Programs, no part of these Programs may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of Oracle Corporation.

If the Programs are delivered to the U.S. Government or anyone licensing or using the programs on behalf of the U.S. Government, the following notice is applicable:

Restricted Rights Notice Programs delivered subject to the DOD FAR Supplement are "commercial computer software" and use, duplication, and disclosure of the Programs, including documentation, shall be subject to the licensing restrictions set forth in the applicable Oracle license agreement. Otherwise, Programs delivered subject to the Federal Acquisition Regulations are "restricted computer software" and use, duplication, and disclosure of the Programs shall be subject to the restrictions in FAR 52.227-19, Commercial Computer Software - Restricted Rights (June, 1987). Oracle Corporation, 500 Oracle Parkway, Redwood City, CA 94065.

The Programs are not intended for use in any nuclear, aviation, mass transit, medical, or other inherently dangerous applications. It shall be the licensee's responsibility to take all appropriate fail-safe, backup, redundancy, and other measures to ensure the safe use of such applications if the Programs are used for such purposes, and Oracle Corporation disclaims liability for any damages caused by such use of the Programs.

Net8, Oracle, Personal Oracle, and SQL*Net are registered trademarks of Oracle Corporation. Oracle8, Oracle Web Application Server, Oracle WebServer, and Oracle Web Publishing Assistant are trademarks of Oracle Corporation. All other company or product names mentioned are used for identification purposes only and may be trademarks of their respective owners.

Contents

Contact Us!	v
How to Contact Oracle Technical Publications	v
How to Contact Oracle Support Services	vi
Resources for Oracle Partners and Developers	ix
Preface	xiii
Intended Audience	xiv
Structure	xiv
Conventions Used in this Guide	xiv
Related Documents	xvi
1 Introducing Oracle Web Publishing Assistant	
Introducing Oracle Web Publishing Assistant	1-2
Recent Feature Updates	1-3
About the Interface	1-4
Menu and Toolbar	1-4
File Listing	1-5
Hardware Requirements	1-5
Software Requirements	1-6
Installing Oracle Web Publishing Assistant	1-6
De-installing Oracle Web Publishing Assistant	1-7

2 Understanding Oracle Web Publishing Assistant

Using Sample Templates	2-2
Designing Templates.....	2-2
Keyword <%begindetail%>, <%enddetail%>	2-3
Conditional Logic Keyword <%if%>, <%else%>, <%endif%>.....	2-3
Variable CurrentRecord.....	2-5
Variable CurrentDate	2-5
Variable MaxColumn	2-6
Variable QueryId	2-7
Generated Web Page Queries	2-7
Settings in the Windows NT Registry	2-8

3 Working with Oracle Web Publishing Assistant

Before You Start.....	3-2
Creating New Web Page Queries.....	3-3
Administering Web Page Queries	3-10
Previewing a Scheduled Web Page Query.....	3-10
Generating Web Page Queries.....	3-11
Deleting Scheduled Web Page Queries	3-11
Viewing and Modifying Properties of Web Page Queries	3-11
Refreshing the Listing of Web Page Queries	3-13
Editing Templates.....	3-13
Editing Query Syntax.....	3-14

4 Using the Tutorials

About the Tutorials	4-2
Tutorial 1: Using the Generated Default Template	4-2
Tutorial 2: Using the EXAMPLE2.HTX Template	4-6
Tutorial 3: Using the EXAMPLE3.HTX Template	4-10

A Oracle Web Publishing Assistant Repository

B Troubleshooting

Questions and Answers..... B-1

Index

Contact Us!

Oracle Web Publishing Assistant Getting Started, Release 8.0.6 for Windows NT

Part No. A69526-01

This document describes how to contact Oracle Corporation if you have issues with the documentation or software.

Read the section...	If you...
How to Contact Oracle Technical Publications	Have issues with Documentation
How to Contact Oracle Support Services	Have issues with Software
Resources for Oracle Partners and Developers	Want to join an Oracle partner or application developer program

How to Contact Oracle Technical Publications

Oracle Corporation welcomes your comments and suggestions on the quality and usefulness of this publication. Your input is an important part of the information used for revision.

- Did you find any errors?
- Is the information clearly presented?
- Do you need more information? If so, where?
- Are the examples correct? Do you need more examples?
- What features did you like most about this manual?
- Do you have suggestions for improvement? Please indicate the chapter, section, and page number (if available).

You can send comments regarding documentation to *ntdoc@us.oracle.com*

How to Contact Oracle Support Services

Please copy this page and distribute within your organization as necessary.

Oracle Support Services can be reached at the following telephone numbers. The hours of business are detailed in your support contract and the *Oracle Customer Support Guide* in your kit.

Oracle Support Call... Services In...

All locations	The telephone number for your country is listed at the following Web site: http://www.oracle.com/support/contact_us/sup_hot_phone.html Oracle Support Services telephone numbers are also listed in the <i>Oracle Customer Support Guide</i> in your kit.
---------------	---

Please complete the following checklist before you call. If you have this information ready, your call can be processed much quicker.

- ☐ Your CPU Support Identification Number (CSI Number) if applicable.

- ☐ The hardware name on which your application is running.

- ☐ The operating system name and release number on which your application is running.

-
- ☐ The release numbers of the Oracle Server and associated products involved in the current problem. For example, Oracle8 Server release 8.0.6.0.0 and Oracle Replication Manager release 1.6.0.0.0.

- ☐ Are you using 16-bit or 32-bit Oracle software?

- ☐ The third-party vendor and version you are using.

- ☐ The exact error codes and messages. Please write these down as they occur. They are critical in helping Oracle Support Services to quickly resolve your problem.

- ☐ A description of the issue, including:

- **What happened?** For example, the command used and its result.

- **What happened?** For example, the command used and its result.

-
- **When did it happen?** For example, during peak system load, or after a certain command, or after an operating system upgrade.

- **Where did it happen?** For example, on a particular system, or within a certain procedure or table.

- **What is the extent of the problem?** For example, production system unavailable, or moderate impact but increasing with time, or minimal impact and stable.

- Keep copies of any trace files, core dumps, and redo log files recorded at or near the time of the incident. Oracle Support Services may need these to further investigate your problem.

Resources for Oracle Partners and Developers

This section provides information on partner programs and resources for Oracle database administrators and application developers.

Information Source	Description
Oracle Corporation Home Page http://www.oracle.com	This Web site is the starting point for general information on Oracle Corporation.
Alliance Online http://alliance.oracle.com	<p>Oracle provides leading-edge technology, education, and technical support that enables you to effectively integrate Oracle into your business. By joining the Oracle Partner Program, you demonstrate to customers that you are committed to delivering innovative Oracle-based solutions and services.</p> <p>The greater your commitment to Oracle, the more we can help you grow your business. It's that simple. The value you derive is associated directly with your level of commitment.</p>
Oracle Education http://education.oracle.com/	Customers come to Oracle Education with a variety of needs. You may require a complete curriculum based on your job role to enable you to implement new technology. Or you may seek an understanding of technology related to your key area of responsibility to help you meet technical challenges. You may be looking for self-paced training that can be used as an ongoing resource for reference and hands-on practice. Or, you may be interested in an overview of a new product upgrade. Whatever your training need, Oracle Education has the solution.
Oracle Technology Network http://technet.oracle.com/	The Oracle Technology Network is your definitive source for Oracle technical information for developing for the Internet platform. You will be part of an online community with access to free software, Oracle Technology Network-sponsored Internet developer conferences, and discussion groups on up-to-date Oracle technology. Membership is free.
Oracle Store http://oraclestore.oracle.com/	This is Oracle's online shopping center. Come to this site to find special deals on Oracle software, documentation, publications, computer-based training products, and much more.

Information Source	Description
Oracle Support Services' Support Web Center http://www.oracle.com/support/	Oracle Support Services offers a range of programs so you can select the support services you need and access them in the way you prefer: by telephone, electronically, or face to face. These award-winning programs help you maintain your investment in Oracle technology and expertise.
Oracle <i>MetaLink</i> http://www.oracle.com/support/elec_sup/index.html	Oracle <i>MetaLink</i> is Oracle Support Services' premier Web support service. It is available to Oracle <i>metals</i> customers (Gold, Silver, Bronze), 24 hours a day, seven days a week.
Oracle <i>Lifecycle</i> http://www.oracle.com/support/sup_serv/lifecycle/index.html	Oracle <i>Lifecycle</i> is designed to deliver customized, industry-focused, full life-cycle support solutions that enable industry leaders to use Oracle technology to make smart business decisions, achieve operational excellence, and succeed in their markets.
Expert <i>ONLINE</i> http://www.oracle.com/support/sup_serv/online/index.html	Oracle Support Services has launched a new line of services called Expert <i>ONLINE</i> . These services provide online database administration for companies looking to supplement their existing DBA staff or fill a DBA role. Services range from Expert <i>DETECT</i> , a monitoring, diagnostic, and recommendation service, to Expert <i>DBA</i> , a full online database administration service.
Virtual Support Analyst (VSA) http://www.oracle.com/support/sup_serv/vsa_start.html	VSA is Oracle's Internet e-mail service; it is available to U.S. customers with an Oracle <i>metals</i> support agreement. With VSA, you can initiate a request for assistance through e-mail, bypassing the queues you may encounter when using telephone support. VSA also enables you to access Oracle's bug database.
Customer Service http://www.oracle.com/support/cus_serv/index.html	This site provides resources to make your interactions with Oracle as easy as possible. Among the things you can do are: <ul style="list-style-type: none">■ Learn what is a CPU Support Identification (CSI) number■ Update your technical contact information■ Find out whom to contact for invoice and collection issues■ Request product update shipments■ Access a glossary of Oracle Support Services terms

Information Source	Description
U.S. Customer Visit Program http://www.oracle.com/support/cus_serv/cus_visit.html	<p>This U.S.-based program has been established to help our customers understand and obtain maximum benefit from the support services they have purchased.</p> <p>The visit typically offers a customized orientation presentation, a comprehensive overview and demonstration of Oracle's electronic services, and helpful tips on working more effectively with Oracle Support Services.</p>
Support Web Center Library http://www.oracle.com/support/library/index.html	<p>This site contains articles, guides, and other documentation to help you leverage the wealth of knowledge and reference material that Oracle Support Services produces.</p>
Product Availability infowin@us.oracle.com	<p>Send an e-mail to request information on future product releases on Oracle for Windows NT and Windows 95/98.</p>

Preface

This Preface includes these topics:

- [Intended Audience](#)
- [Structure](#)
- [Conventions Used in this Guide](#)
- [Related Documents](#)

Intended Audience

This manual is intended for anyone who wants to display database query results in HTML format. You must have Windows NT User Login privileges on the machine you query from to use Oracle Web Publishing Assistant. You need a Windows NT Administrator account to install and maintain Oracle Web Publishing Assistant.

Structure

This manual is organized into these sections:

Chapter	Description
Chapter 1, "Introducing Oracle Web Publishing Assistant"	Introduces Oracle Web Publishing Assistant. Discusses system requirements and installation.
Chapter 2, "Understanding Oracle Web Publishing Assistant"	Explains basic product architecture and use.
Chapter 3, "Working with Oracle Web Publishing Assistant"	Describes how to use the Oracle Web Publishing Assistant. Describes the interface, how to perform tasks, and how to administer queries.
Chapter 4, "Using the Tutorials"	Provides instructions on how to use the included tutorials.
Appendix A, "Oracle Web Publishing Assistant Repository"	Explains the repository entries.
Appendix B, "Troubleshooting"	Describes common questions and solutions to common problems.

Conventions Used in this Guide

Oracle Home Directories

Oracle Installer creates a top-level directory on your hard disk called Oracle home. The default Oracle home directory for Windows NT is ORANT.

In examples, an implied carriage return occurs at the end of each line, unless otherwise noted. Press the Return key at the end of a line of input.

Terminology

The term Oracle8 server is used in this document to mean any of the Oracle8-based server products:

- Oracle8 Enterprise Edition
- Oracle8 Server
- Personal Oracle8

Typographical Conventions

Note these typographical conventions when reading this manual:

Convention	Meaning	Example
Monospace text	Indicates text that must be typed exactly as shown.	SET ECHO OFF
All uppercase plain	Indicates command names, SQL reserved words, and keywords. All uppercase plain is also used for directory names and file names.	ALTER DATABASE ORANT\DATABASE\INTORCL.ORA
Italics	Indicate a value that you must provide. Italics are also used for emphasis in the text and to indicate the titles of other manuals.	INTSID.ORA where <i>SID</i> represents the SID of your database.
Horizontal ellipsis . . .	Indicates that parts of the statement or command not directly related to the example have been omitted.	CHKVAL <i>fieldname value 1 value 2... valueN</i>
Vertical bar	Represents an 'or' option between several options. Enter only one of the options. Do not enter the vertical bar. The set of alternative choices is enclosed by curly braces if one of the items is required, or by square brackets if the item is an optional alternative.	. . . DEFINE { <i>macro1</i> <i>macro2</i> }
Curly braces {}	Encloses required items. Choose one of the options.	. . . DEFINE { <i>macro1</i> <i>macro2</i> }
Square brackets []	Enclose optional items. You can choose one or none of the options. Square brackets also indicate a function key, for example [Enter].	cvtrct <i>termname</i> [<i>outfile</i>]

Convention	Meaning	Example
C:\>	Represents the Windows NT command prompt of the current hard disk drive. Your prompt may differ and may, at times, reflect the subdirectory in which you are working.	C:\>SETUP.EXE
Backslash (\) before a name in all uppercase letters	Indicates a subdirectory.	ORANT\NETWORK
ORACLE_HOME	Indicates the Oracle home directory, where Oracle Installer installs your Oracle products. Oracle Web Publishing Assistant is only available on Windows NT, so the default Oracle home directory is ORANT.	ORACLE_HOME\OWAST

Related Documents

For more information, see the following manuals.

- *Oracle8 Enterprise Edition for Windows NT Installation CD-ROM Insert*
- *Oracle8 Enterprise Edition Release Notes*
- *Oracle8 Enterprise Edition Getting Started for Windows NT*
- *Oracle Enterprise Manager Configuration Guide*
- *Oracle Enterprise Manager Administrator's Guide*
- *Net8 Getting Started for Windows NT and Windows 95*
- *Net8 Administrator's Guide*
- *Oracle8 Parallel Server Concepts and Administration*
- *Oracle Parallel Server Management User's Guide*
- *Oracle8 Concepts*
- *Oracle8 Reference*
- *Oracle8 Error Messages*

Introducing Oracle Web Publishing Assistant

This chapter provides an overview of the Oracle Web Publishing Assistant. It also lists the system requirements and describes how to get started using the product. Specific topics discussed are:

- [Introducing Oracle Web Publishing Assistant](#)
- [Recent Feature Updates](#)
- [About the Interface](#)
- [Hardware Requirements](#)
- [Software Requirements](#)
- [Installing Oracle Web Publishing Assistant](#)
- [De-installing Oracle Web Publishing Assistant](#)

Introducing Oracle Web Publishing Assistant

You have an Oracle database and tablespaces filled with useful information. You want to share this information with your co-workers, customers, and the rest of the world. How can you get this information, and present it in an easy-to-read format?

Oracle Web Publishing Assistant web-enables an Oracle database, offering high performance and scalability with a user-friendly interface. Use the Oracle Web Publishing Assistant Create Web Page Wizard to create *web page queries* which are displays of data retrieved from an Oracle database merged with HTML web pages. The default HTML template provided with Oracle Web Publishing Assistant is Java-enabled, providing scalability to accommodate your query results. Oracle Web Publishing Assistant uses database connection sharing and the Oracle Call Interface (OCI8) to improve performance and maximize server resources.

To make the web page available on an intranet or the World Wide Web, you must configure a web server. A web server is not necessary if you only want to view the page locally. To view the page locally, use your web browser to open the file. See "[Software Requirements](#)" on page 1-6.

Note: To use Oracle Web Publishing Assistant, you need Windows NT User Login privileges on the machine from which you query.

You can download trial versions of Oracle WebServer or Oracle Web Application Server from the Oracle Corporation web site at <http://www.oracle.com>.


Recent Feature Updates

This release of Oracle Web Publishing Assistant offers updated features:

- The Preview function replaces the Open function. To preview a web page, click Preview on the toolbar. The web page is opened with your web browser. See ["Administering Web Page Queries"](#) on page 3-10 for more information.
- The “When Data Changes” scheduling option has been added to the scheduling options. This scheduling option when selected allows Oracle Web Publishing Assistant to automatically update your web page query whenever the database is modified. See ["Creating New Web Page Queries"](#) on page 3-3 for more information.
- The “Manually” scheduling option has been added to the scheduling options. This scheduling option requires you to manually generate your web page by clicking Generate. See ["Creating New Web Page Queries"](#) on page 3-3 for more information.
- Modification of file properties is now possible when you open the properties of an existing web page query. You can change any aspect of the web page query, including the template, scheduling option, and the query. See ["Administering Web Page Queries"](#) on page 3-10 for more information.
- The default template .HTX uses a Java applet, which provides high scalability and reliable formatting across different platforms and browsers. See ["Tutorial 1: Using the Generated Default Template"](#) on page 4-2 for more information.
- The template syntax now includes more keywords to enable greater control in displaying query results. See ["Designing Templates"](#) on page 2-2 for more information.
- Oracle Web Publishing Assistant now uses database connection sharing and the Oracle Call Interface version 8 (OCI8) to improve performance.
- Synonyms of tables or views can be selected from the database hierarchy to build queries. See ["Creating New Web Page Queries"](#) on page 3-3.
- The file listing is automatically refreshed every minute.
- The scheduling option uses buttons instead of drop-down lists, improving the interface. See ["Creating New Web Page Queries"](#) on page 3-3.
- The maximum characters per column returned from the database has been increased from 2000 to 4000.

About the Interface

Oracle Web Publishing Assistant features an easy-to-use toolbar interface that enables you to create new and administer existing web page queries:

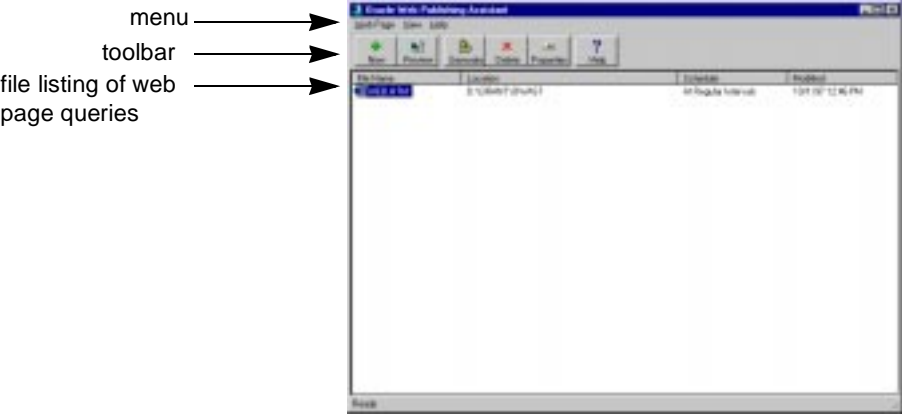

Menu and Toolbar

Perform administrative tasks using either the menu or the toolbar. The menu provides the same functionality as the toolbar, but the menu also includes commands that enable you to modify the look of Oracle Web Publishing Assistant. For example, you can change the listing to icons, and display or hide the status bar and toolbar.

The toolbar provides easy access to Oracle Web Publishing Assistant functionality:

Toolbar Button	Task Performed
New	Creates a new web page query.
Preview	Opens the web page query in your web browser.
Generate	Generates a web page immediately.
Delete	Deletes a web page query.

Toolbar Button	Task Performed
Properties	Allows you to view and modify the properties of the web page query: <ul style="list-style-type: none">■ login information■ query syntax■ scheduling■ file options and template file
Help	Displays online help topics.

File Listing

The file listing shows you the:

- web page query files that you have scheduled
- location of the files in your system
- scheduling option you have specified for that web page query
- last date and time the web page query was modified

Double-click a web page query file name in the listing to preview the web page in your web browser. Because Oracle Web Publishing Assistant uses an asynchronous processing model, the actual web page may not have been generated immediately. If the page does not yet exist when you double-click the file in the listing or click Preview, Oracle Web Publishing Assistant prompts you to create the page immediately.

Hardware Requirements

Use these hardware components with Oracle Web Publishing Assistant:

- Compaq, Hewlett-Packard, or 100% compatible PC with 80486 processor or faster
- 32 MB RAM
- 10 MB hard disk space
- CD-ROM drive

Software Requirements

Oracle Web Publishing Assistant requires these software components:

Software Component	Release
Microsoft Windows NT Workstation or Server operating system	4.0.x
Oracle8 Required Support Files (or RSF)	8.0.6
Net8 for accessing a remote Oracle8 or Oracle7 Server	8.0.6
Web Browser	4.0.x
■ Netscape Navigator	
Visit: http://www.netscape.com	
or	
■ Microsoft Internet Explorer	
Visit: http://www.microsoft.com	

Installing Oracle Web Publishing Assistant

Before installing this product, review *Oracle8 Enterprise Edition Release Notes* included in this package for the most recent information about this product.

Oracle Web Publishing Assistant is automatically installed with Oracle8 Enterprise Edition, if you choose a Typical installation.

Note: You must have a Windows NT Administrator account to install and maintain Oracle Web Publishing Assistant.

See *Oracle8 Enterprise Edition Installation Release 8.0.6 for Windows NT* for instructions.

De-installing Oracle Web Publishing Assistant

To de-install Oracle Web Publishing Assistant:

1. Stop Oracle Web Publishing Assistant services.

- a. From the taskbar, choose Start > Settings > Control Panel.
- b. Double-click Services.
- c. Select OracleWebAssistant, and click Stop.
- d. Click Close to close the control panel.

2. Start Oracle Installer.

From the taskbar, choose Start > Programs > Oracle for Windows NT > Oracle Installer.

The installed products screen of Oracle Installer appears on the right side of your screen.

3. Select Oracle Web Publishing Assistant, and click Remove.

A message appears confirming your decision to remove the product. A window shows the progress of the de-installation. A message appears, confirming that the product has been de-installed.

4. Click Exit to quit Oracle Installer.

Understanding Oracle Web Publishing Assistant

This chapter discusses how the different components of Oracle Web Publishing Assistant work together to deliver web-enabled Oracle database information. Specific topics discussed are:

- [Using Sample Templates](#)
- [Designing Templates](#)
- [Generated Web Page Queries](#)
- [Settings in the Windows NT Registry](#)

Using Sample Templates

Oracle Web Publishing Assistant provides you with sample templates (located in ORANT\OWAST\SAMPLES). Use these templates to become familiar with creating web page queries.

The default template (.HTX) uses a Java applet to format the database query information into a spreadsheet-like web page. The new Java-enabled web page template:

- expands to accommodate query results
- provides reliable formatting
- allows browser independence

See [Chapter 4, "Using the Tutorials"](#) for more information on the available templates.

Designing Templates

If you want to design your own templates, use the Oracle Web Publishing Assistant keywords in the HTML extension files (.HTX) to control how the web page is constructed. The Oracle Web Publishing Assistant keywords used in .HTX files are:

- **Keyword** `<%begindetail%>`, `<%enddetail%>`
- **Conditional Logic Keyword** `<%if%>`, `<%else%>`, `<%endif%>`
- **Variable** `CurrentRecord`
- **Variable** `CurrentDate`
- **Variable** `MaxColumn`
- **Variable** `QueryId`

The template syntax is supported by HTML editors like Microsoft Frontpage. Templates can be modified at any time. Oracle Web Publishing Assistant uses the modified template when generating your web page at the next scheduled generation time.

If you modify your original query after generating a web page, then Oracle Web Publishing Assistant prompts you to modify your template. Oracle Web Publishing Assistant launches your default template editor. You can then choose to use the original template, modify your existing template, or use a new template. See ["Administering Web Page Queries"](#) on page 3-10 and Oracle Web Publishing Assistant Online Help for more information.

Keyword `<%begindetail%>`, `<%enddetail%>`

This keyword surrounds a section of the HTML extension file in which the data output from the Oracle database will be merged. Within the section, the column names are delimited with `<%` and `%>` which are used to mark the position of the data returned from the query.

For example:

```
<%begindetail%>
<%ename%>: <%sal%>
<%enddetail%>
```

lists the columns ENAME (employee name) and SAL (salary). You can refer to any column in this manner. You can refer to column names in other sections of the extension file. If no records are returned from the query, the `<%begindetail%>` section will be omitted.

Conditional Logic Keyword `<%if%>`, `<%else%>`, `<%endif%>`

Your template can contain conditional logic with an if-then-else statement to control how the web page is constructed. One common usage of an if-then-else statement is to insert a condition to display the results from the query on the first row with a `<%begindetail%>` section. If no records are returned by the query, the following message appears in the resulting HTML file:

Sorry, no employees had salaries greater than 5000.

By using the `<%if%>` statement and a built-in variable `CurrentRecord`, you can tailor the output so that the error message is displayed when no records are returned by the query.

Note: Conditional logic statements must exist entirely before, inside, or after the `<%begindetail%>` and `<%enddetail%>` block.

Nested `<%if%>` statements are not allowed (you cannot nest an `<%if%>` statement within a `<%if%>` statement).

The syntax is structured as:

```
<%if condition%>
HTML text
[<%else%>
HTML text]
<%endif%>
```

where *condition* is of the form:

value1 operator value2
and *operator* can be one of the following:

Operator	If...
EQ	value1 equals value2
LT	value1 is less than value2
GT	value1 is greater than value2
CONTAINS	any part of value1 contains the string value2

The operands *value1* and *value2* can be column names, a built-in variable, or a constant. See the section ["Variable CurrentRecord"](#) on page 2-5 for more information.

Here is an example:

```
<HTML>
<BODY>
<%begindetail%>
<%if CurrentRecord EQ 0 %>
<B>Employee Name Salary<BR></B>
<%endif%>
<%ename%>:<%sal%>
<%enddetail%>
<P>
<I>
This web page was created by merging the results of the SQL query with the
template file EXAMPLE2.HTX.
<P>
The merge was performed by Oracle Web Publishing Assistant and the results were
stored in a web page.
</I>
</BODY>
</HTML>
```

When used in an `<%if%>` statement, values are not delimited with `<%` and `%>`. For example, to process employee name Scott, use the condition:

```
<%begindetail%>
<%if ename EQ "Scott"%>
The employee is Scott.
<%endif%>
<%enddetail%>
```

Variable CurrentRecord

The CurrentRecord variable contains the number of times the `<%begindetail%>` section has been processed. The first time through the `<%begindetail%>` section, the value is zero (0). The value of CurrentRecord changes every time another record is retrieved from the database.

Variable CurrentDate

The CurrentDate variable shows the date and time of the web page generation. This variable cannot be used inside `<%if%>` statements. If you do not specify a date format, the default format used is DD/MMM/YYYY (for example, 05/MAY/1999). The default time format is HH:MM:SS A.M./P.M. (for example, 10:01:15 A.M.). You can change the date and time format using these codes:

Format Code	Description
%a	Abbreviated weekday name
%A	Full weekday name
%b	Abbreviated month name
%B	Full month name
%c	Date and time representation appropriate for locale
%d	Day of month as decimal number (01 - 31)
%H	Hour in 24-hour format (00 - 23)
%I	Hour in 12-hour format (01 - 12)
%j	Day of year as decimal number (001 - 366)
%m	Month as decimal number (01 - 12)
%M	Minute as decimal number (00 - 59)
%p	A.M./P.M. indicator for 12-hour clock in current locale
%S	Second as decimal number (00 - 59)
%U	Week of year as decimal number, with Sunday as first day of week (00 - 51)
%w	Weekday as decimal number (0 - 6; Sunday is 0)
%W	Week of year as decimal number, with Monday as first day of week (00 - 51)

Format Code	Description
%x	Date representation for current locale
%X	Time representation for current locale
%y	Year without century, as decimal number (00 - 99)
%Y	Year with century, as decimal number (for example, 1998)
%z	Time zone abbreviation; no characters if time zone is unknown
%Z	Time zone name; no characters if time zone is unknown

The # flag may prefix any formatting code, and the meaning of the format code is changed as follows:

Format Code	Description
%%c	Long date and time representation, appropriate for current locale; for example: Tuesday, June 8, 1999, 12:41:29
%%x	Long date representation, appropriate to current locale; for example: Tuesday, June 8, 1999
%%a, %%A, %%b, %%B, %%p, %%X, %%z, %%Z, %%%	# flag is ignored
%%d, %%H, %%I, %%j, %%m, %%M, %%S, %%U, %%w, %%W, %%y, %%Y	Removes leading zeros (if any)

Here is an example using the CurrentDate variable:

<%CurrentDate:Today is %A, day %d of %B in the year %Y %>

which translates into the actual date when the web page is generated:

Today is Tuesday, day 8 of June in the year 1999

Variable MaxColumn

The MaxColumn variable <%MaxColumn%> specifies the number of columns returned by the query.

Variable QueryId

The QueryId variable <%QueryId%> provides a unique identifying number for the generated web page. You can use this number when troubleshooting Oracle Web Publishing Assistant. See [Appendix B, "Troubleshooting"](#) for more information.

Generated Web Page Queries

Web page queries generated by Oracle Web Publishing Assistant consist of two types of information:

Information Type	Description
Static Information	Stored in a template.
Dynamic Information	Retrieved from the database and merged with the static information from the template.

This model of page generation has two benefits:

- **Flexibility**
The template layout is compatible with popular HTML editors such as Microsoft Frontpage. You can modify the templates in any way you want, whenever you want.
- **Performance**
The database does not need to be accessed every time a web page is viewed. The database only needs to return results from the query, therefore performance is not negatively impacted.

Settings in the Windows NT Registry

Oracle Web Publishing Assistant registry values are located under the key HKEY_LOCAL_MACHINE\SOFTWARE\ORACLE

Value	Description
OWASTDBS	The default value is OFF. The possible values are ON or OFF. The OFF setting disables database connection sharing.
OWASTDBC	The default value is 1000. The available range is 1...INFINITY. The number of seconds between database polls, to discover if database information has changed since last poll. A lower number means a shorter amount of time between database data change and web page generation, but a lower number also increases CPU usage. If this value is not present in the registry, then Oracle Web Publishing Assistant is using the default value of 1000.
OWASTHOME	The default value is OracleWebAssistant. The name of the Oracle Web Publishing Assistant Windows NT service used in conjunction with multiple Oracle homes. This value is not displayed in the registry. <i>Do not change this value.</i>
OWAST	The default value is <i>ORACLE_HOME\OWAST</i> . The Oracle home directory where Oracle Web Publishing Assistant is installed. <i>Do not change this value.</i>

To modify the settings of the repository values OWASTDBS and OWASTDBC:

1. From the command prompt, type:

```
C:\>regedit  
Registry Editor starts.
```

Working with Oracle Web Publishing Assistant

This chapter discusses how to use Oracle Web Publishing Assistant. Specific topics discussed are:

- [Before You Start](#)
- [Creating New Web Page Queries](#)
- [Administering Web Page Queries](#)

Before You Start

Before you begin using Oracle Web Publishing Assistant, consider:

Issue	To implement...
Enlarge the event queue log file size if: <ul style="list-style-type: none">■ you have more than 10 web page queries in the listing■ you update 10 more web page queries a day	<ol style="list-style-type: none">1. From the taskbar, choose Start > Programs > Administrative Tools > Event Viewer.2. Choose Log Settings from the Log menu. The Event Log Settings screen appears.3. Select the Application log type from the Change Settings drop-down list box.4. Set the Maximum log size to 30016 Kilobytes (K).5. Set Event Log Wrapping to Overwrite events older than 7 days.
The limit of queries stored in the Oracle Web Publishing Assistant repository is 65535 queries.	This limit is inherent in the software. You cannot change this limit.
The maximum characters per column returned from the database is 4000 characters.	This limit is inherent in the software. You cannot change this limit.
Use domain shared or Oracle OPSS accounts	<ol style="list-style-type: none">1. From the taskbar, choose Start > Settings > Control Panel.2. Double-click Services.3. Double-click the service OracleWebAssistant from the listing. The Service dialog box appears.4. Select This Account.5. Enter your (domain) user account in the This Account field, or alternatively, click “...” to select your account.6. Enter your (domain) user password, and confirm.7. Click OK to dismiss the dialog box, and save your changes.8. Select OracleWebAssistant from the service listing, and click Stop.9. Click Start to start the service and use the new account.10. Click Close to close the control panel.

Issue	To implement...
Determine how you want the web page to look, before entering a query to create a web page. Oracle Web Publishing Assistant provides you with sample templates that you can use (ORANT\OWAST\SAMPLES*.HTX), or you can create your own template using any HTML editor.	See " Designing Templates " on page 2-2.

Creating New Web Page Queries

Oracle Web Publishing Assistant merges the results of your database query with an HTML template (use the default template provided with the product or a template that you design). The result is a *web page query*.

To create a new web page query:

1. From the taskbar, choose Start > Programs > Oracle for Windows NT > Oracle Web Publishing Assistant.

The *Oracle Web Publishing Assistant* Welcome screen appears:




The first time you run Oracle Web Publishing Assistant, a Create Web Page button appears. This button will not appear in subsequent uses of Oracle Web Publishing Assistant if you have web page queries scheduled.

The next time you want to create a new web page query, click New in the toolbar to launch the Create Web Page Wizard.

If you do not want the welcome screen to appear the next time you start the Oracle Web Publishing Assistant, clear the check box on the bottom of the welcome screen.

2. Click Create Web Page.

The *Create Web Page Wizard (Step 1 of 4)* screen appears.

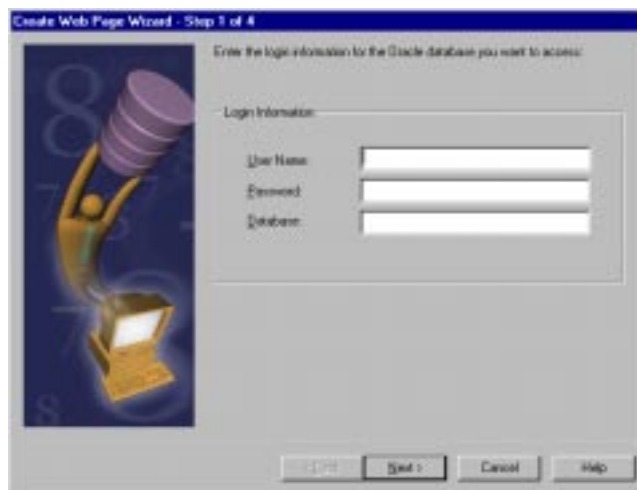

3. Enter database login information, and click Next:

Field	Enter
User Name	A valid user name for the database you want to access.
Password	The password for the account.
Database	The Net8 service name or database alias of the database you want to connect to. Leave the field blank if you want to connect to a local database.

The next screen, *Create Web Page Wizard (Step 2 of 4)* appears.

4. Select a method for creating a query, and click Next after building or entering your query statement:

Query Method	Description
Build a query from a database hierarchy.	



You can view the structure of the database, and select a table, view, synonym, or multiple columns of an object. Further customize your query by clicking Specify Additional Query Criteria. Provide additional criteria such as WHERE or ORDER BY clauses.

Enter a query as a SQL statement.






Enter the SQL 'SELECT' statement in the field provided.

You can also import a SQL statement from a text file by clicking the Import SQL From Text File button.

The next screen, *Create Web Page Wizard (Step 3 of 4)* appears.

5. Select a scheduling option, and click Next

Scheduling Option	Description
Immediately	<div></div> <p>Oracle Web Publishing Assistant immediately generates your web page.</p> <p>To view the page, open the file in your web browser. The default directory for generated pages is ORANT\OWAST, where ORANT is your Oracle home directory and \OWAST is the Oracle Web Publishing Assistant directory. The file will not be included in the file listing.</p>
Once	<div></div> <p>Select the specific date and time of the day within the next 31 days to create your web page. Oracle Web Publishing Assistant will create the web page once at the time and day you specified. You can select only one day and time. You cannot specify multiple create sessions with this scheduling option.</p>
On Day(s) of the Week	<div></div> <p>Select the day or days of the week to create your web page. Oracle Web Publishing Assistant will automatically create the web page on that day (or those days) and time, every week. You can choose any number of days and one time for that day. For example, you can choose to have your web page created at 2:00 P.M. every Monday, Wednesday, and Friday of every week.</p>

Scheduling Option

Description

On Date(s) of the Month



Select the date or dates of the month you want Oracle Web Publishing Assistant to create your web page. You can select any number of dates and one time of day to create your web page. For example, you can choose to have your web page created at 7:00 A.M. every 1st and 15th of every month.

At Regular Intervals




Specify the time intervals at which Oracle Web Publishing Assistant should create your web page. You can specify the time interval (minutes, hours, or days) between web page builds. For example, you can choose to have your web page created every 5 minutes, every 36 hours or every 31 days. The maximum time interval is 744 hours (31 days).


When Data Changes



Automatically updates your web page whenever the relevant data in the database is modified. You can only use this scheduling option when you select a table from the database hierarchy to build your query.

Scheduling Option	Description
Manually	<div><div></div><div><p>Your web page is generated whenever you decide to generate it. After creating the web page query with the Create Web Page wizard, select the file from the listing, and click Generate.</p></div></div>

The next screen *Create Web Page Wizard - Step 4 of 4* appears:

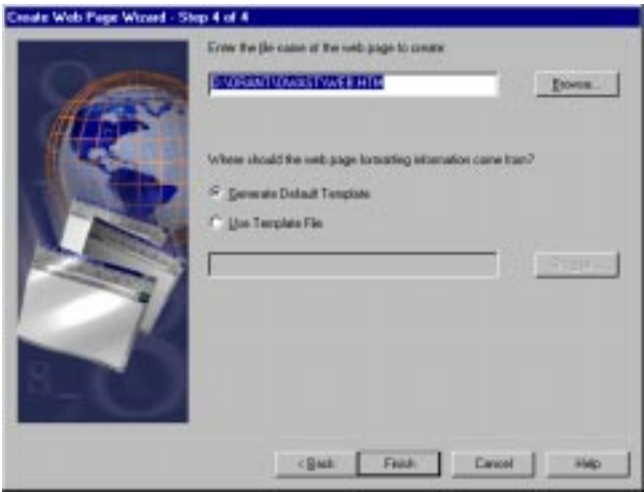

6. Enter the file name of the web page you want to create, or click Browse to search for a location of an existing file name.

If the file is located on a network drive, use the Universal Naming Convention (UNC) name instead of the network drive letter. For example:

Use	Instead of
\\servername\filename.htm	F:\filename.htm

In addition, ensure that the OracleWebAssistant service is running under the user account with access to the network drive.

- a. From the taskbar, choose Start > Settings > Control Panel.
 - b. Double-click Services.
 - c. Double-click OracleWebAssistant.
 - d. This account should be set to the user account with access to the network drive.
7. Specify whether you want Oracle Web Publishing Assistant to use a default template or a template file that you have already created. Browse to locate the file, or enter the file name in the field. Click Finish.

The Summary Screen appears.

8. Click OK to dismiss the screen.

All web pages, except those scheduled to be created Manually, are automatically generated at this time. If you specified a scheduling option for some time in the future, your web page will also be regenerated at that scheduled time.

Continue to the next section "[Administering Web Page Queries](#)" on page 3-10 to learn how to modify and maintain your web page queries.

Administering Web Page Queries

Using Oracle Web Publishing Assistant, you can perform administrative tasks on your web page queries, such as changing the resulting web page formatting, modifying the query syntax, and scheduling updates. Oracle Web Publishing Assistant provides an easy-to-use, graphical interface for you to administer your web page queries. The menu and toolbar are briefly described in the section "[Before You Start](#)" on page 3-2.

After you have created and scheduled your web page queries, the (web page query) files appear in the file listing of the Oracle Web Publishing Assistant. Oracle Web Publishing Assistant enables you to maintain your web pages graphically.

This section describes the following administrative tasks:

- [Previewing a Scheduled Web Page Query](#)
- [Generating Web Page Queries](#)
- [Deleting Scheduled Web Page Queries](#)
- [Viewing and Modifying Properties of Web Page Queries](#)
- [Refreshing the Listing of Web Page Queries](#)
- [Editing Templates](#)
- [Editing Query Syntax](#)

Previewing a Scheduled Web Page Query

To preview a web page query:

- Double-click the web page query file name from the listing.

Alternatively, select the file name from the listing, and click Preview on the toolbar. You can also choose Preview from the Web Page menu, or using the right mouse button, right-click on the file name. Choose Preview from the pop-up menu.

Due to the asynchronous processing model used by Oracle Web Publishing Assistant, it is possible that your scheduled web page query has not yet been generated. If it has not been generated, Oracle Web Publishing Assistant asks if you want to generate it now.

Oracle Web Publishing Assistant launches your web browser, if you have associated your web browser with the web page query file type.

Generating Web Page Queries

To generate scheduled web pages:

1. Select the web page query file name from the listing.
2. Click Generate on the toolbar, or from the Web Page menu, choose Generate.

Alternatively, using the right mouse button, right-click the file name. Choose Generate from the pop-up menu.

Oracle Web Publishing Assistant generates the web page immediately and refreshes the listing automatically.

3. Double-click the web page query file name in the listing to view.

Oracle Web Publishing Assistant launches your web browser.

Deleting Scheduled Web Page Queries

To delete a scheduled web page:

1. Select the web page query file name to be deleted from the listing.
2. Click Delete on the toolbar, or from the Web Page menu, choose Delete.

Alternatively, using the right mouse button, right-click on the file name. From the pop-up menu, choose Delete.

Deleting the web page query file name in this way does not delete the related .HTX or .HTM files.

Viewing and Modifying Properties of Web Page Queries

View properties of web page queries to review and modify the settings used to create the page.

To view and modify the properties of the web page queries:

1. Select the web page query file name from the listing.
2. Click Properties on the toolbar, or choose Properties from the Web Page menu.

Alternatively, using the right mouse button, right-click the file name. Choose Properties from the pop-up menu.

The Properties screen appears.

3. Click the tabs to see the properties:

Tab	Description
Login	<p>Shows the User Name, Password (encrypted), and Database (service name or database alias) used to connect to a database.</p> <p>You can edit any field. Click Apply or OK to save your changes.</p>
Query	<p>Shows the SQL statement used to query the database.</p> <p>You can edit the query syntax from within this window:</p> <ol style="list-style-type: none">1. Click Apply or OK after you edit the query. The Modify Template dialog box appears.2. Select an option, and click OK. If you decide to edit your current template, Oracle Web Publishing Assistant automatically launches the default editor application for template files.3. Edit the current template if necessary.4. Click OK to close the Properties screen. <p>You cannot change the query if your scheduling option is When Data Changes. If your scheduling option is When Data Changes, and you wish to change your query, then you need to modify your scheduling option before you modify your query.</p>
Scheduling	<p>Shows the scheduling option details you specified while creating the web page query.</p> <p>You can change your scheduling option. Unless your original query was scheduled as When Data Changes, that scheduling option will not appear as a choice in this tab.</p>

Tab	Description
File Options	<p>Shows the web page query file name and full path. Shows the location of the template used to create the web page.</p> <p>You can edit the template from this screen:</p> <ol style="list-style-type: none">1. Click Edit. Oracle Web Publishing Assistant launches the program associated with editing HTX files. If you do not have a program associated with HTX files, Oracle Web Publishing Assistant launches Notepad.2. Edit the template, and save.3. Oracle Web Publishing Assistant uses the revised template for the next scheduled or the next requested web page generation. <p>The Query ID field displays a number that can be used when troubleshooting Oracle Web Publishing Assistant. See Appendix B, "Troubleshooting" for more information.</p>

Refreshing the Listing of Web Page Queries

Refreshing is automatic in this release of Oracle Web Publishing Assistant. If you want to refresh immediately, choose Refresh from the View menu.

Editing Templates

You can edit templates from within the Properties screen or by opening the template file using your HTML editor.

To edit the template from within the Properties screen:

1. Select the web page query file name from the listing.
2. Click Properties on the toolbar, or from the Web Page menu, choose Properties.

Alternatively, using the right mouse button, right-click the file name. From the pop-up menu, choose Properties.

3. Click the File Options tab.

This tab shows where your web page query is stored (file name and full path), and it shows which template you used to create the query.

4. Click Edit.

The template is opened with the program associated with that file type, or if there is no program associated, Oracle Web Publishing Assistant launches Notepad.

5. Edit the template.
6. Save the file.

Oracle Web Publishing Assistant uses the revised template file for the next scheduled or next requested web page generation.

Editing Query Syntax

To change your query:

1. Select the web page file name from the listing.
2. Click Properties on the toolbar, or from the Web Page menu, choose Properties.
Alternatively, using the right mouse button, right-click the file name. From the pop-up menu, choose Properties.
3. Click the Query tab.
4. Edit the SQL statement in the field.
5. Click Apply or OK.
The *Modify Template* dialog box appears.
6. Select an option, and click OK.
If you decide to edit your current template, Oracle Web Publishing Assistant automatically launches the default editor application for template files.
7. Edit the current template if necessary.
8. Click OK to close the Properties screen.

Using the Tutorials

This chapter discusses how to use the three tutorials included with Oracle Web Publishing Assistant. Specific topics discussed are:

- [About the Tutorials](#)
- [Tutorial 1: Using the Generated Default Template](#)
- [Tutorial 2: Using the EXAMPLE2.HTX Template](#)
- [Tutorial 3: Using the EXAMPLE3.HTX Template](#)

About the Tutorials

Each tutorial in this chapter uses increasingly more complex templates to format retrieved database information. To learn how the different effects are achieved, view the template structure in an HTML editor or view the source code from within your browser.

Tutorial 1: Using the Generated Default Template

The first tutorial uses the default template. This template is a simple page, which will display information retrieved from one table using a Java applet. The database query used in the tutorial retrieves information from the SCOTT.EMP table (installed automatically when you install Oracle8 using the Typical Installation option).

Oracle Web Publishing Assistant merges the results of the database query with the template. The result is a *web page query*. All of your scheduled web page queries are listed in the Oracle Web Publishing Assistant file listing.

To create the web page:


1. Start Oracle Web Publishing Assistant.

From the taskbar, choose Start > Programs > Oracle for Windows NT > Oracle Web Publishing Assistant.

Oracle Web Publishing Assistant appears. If you have never created a web page query using the Create Web Page Wizard before or if you do not have any web page queries scheduled in the listing, then the welcome screen appears with a Create Web Page button. To bypass the welcome screen upon subsequent use of Oracle Web Publishing Assistant, clear the check box on the screen.

2. Click Create Web Page, or click New on the toolbar.

The screen *Create Web Page Wizard - Step 1 of 4* appears:

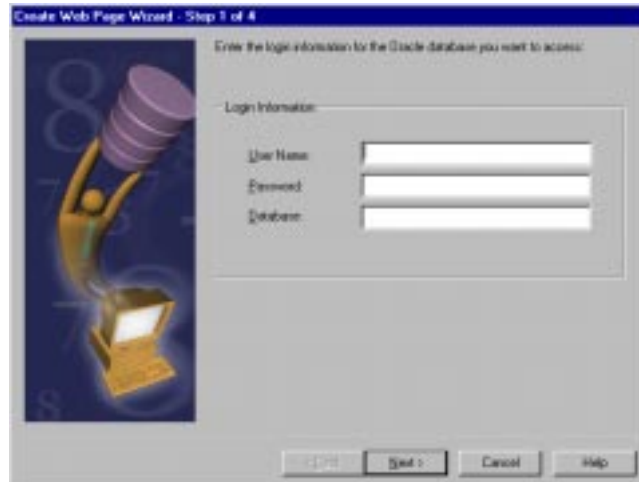

3. Enter database login information, and click Next:

Field	Description
User Name	Enter the user SCOTT.
Password	Enter the password TIGER.
Database	Leave the field blank to connect to the local database.

The screen *Create Web Page Wizard - Step 2 of 4* appears.

4. Select the Build a Query from a Database Hierarchy method for creating a query.

- Click Local Database, and navigate to SCOTT > TABLE > EMP:



- Select EMP, and click Next.

The screen *Create Web Page Wizard - Step 3 of 4* appears.

- Select the Once scheduling option.

Select any day and any time in the future to generate the web page:



- Click Next.

The screen *Create Web Page Wizard - Step 4 of 4* appears:



9. Accept the default file name of the web page (WEB.HTM).

Select Generate Default Template File.

10. Click Next.

The *Summary Screen* appears, confirming that web page creation was successful. Click Finish to dismiss the screen.

Note: All web pages, except those scheduled to be created Manually, are automatically generated at this time. If you specified a scheduling option for some time in the future, your web page will also be regenerated at that scheduled time.

11. The resulting web page (the default file name is WEB.HTM) looks like this:



The screenshot shows a window titled "Oracle Web Publishing Assistant - Results". It displays a table of employee data with 14 rows and 8 columns. The columns are labeled: EMPNO, DEPTNO, EMPID, ENAME, HIREDATE, JOB, MGR, and SAL. The data is as follows:

	EMPNO	DEPTNO	EMPID	ENAME	HIREDATE	JOB	MGR	SAL
1	0	20	7369	SMITH	17DEC-80	CLERK	7369	800
2	300	30	7499	ALLIN	20FEB-81	SALESMAN	7499	1600
3	500	20	7521	WARD	20FEB-81	SALESMAN	7521	1250
4	500	20	7566	JONES	03-APR-81	MANAGER	7566	2875
5	1400	30	7654	MARTIN	28-SEP-81	SALESMAN	7654	1250
6	1400	30	7639	BLAKE	01-MAY-81	MANAGER	7639	2850
7	1400	10	7762	CLARK	09-JUN-81	MANAGER	7762	2450
8	1400	20	7708	SCOTT	19-APR-81	ANALYST	7708	3000
9	1400	10	7826	KING	17-NOV-81	PRESIDENT	7826	5000
10	0	30	7844	TURNER	08-SEP-81	SALESMAN	7844	1500
11	0	30	7876	ADAMS	23-MAY-81	CLERK	7876	1100
12	0	30	7360	JAMES	03-DEC-81	CLERK	7360	950
13	0	20	7362	FORD	03-DEC-81	ANALYST	7362	3000
14	0	10	7364	MILLER	23-JAN-82	CLERK	7364	1300

Tutorial 2: Using the EXAMPLE2.HTX Template

The second tutorial queries the SCOTT.EMP table (installed automatically when you install Oracle8 using the Typical Installation Option) and formats the retrieved information using the template EXAMPLE2.HTX.


To create the web page using the template EXAMPLE2.HTX:

1. Start Oracle Web Publishing Assistant.


From the taskbar, choose Start > Programs > Oracle for Windows NT > Oracle Web Publishing Assistant.

Oracle Web Publishing Assistant appears. To bypass the welcome screen upon subsequent use of Oracle Web Publishing Assistant, clear the check box.

2. Click Next. The Oracle Web Publishing Assistant appears:

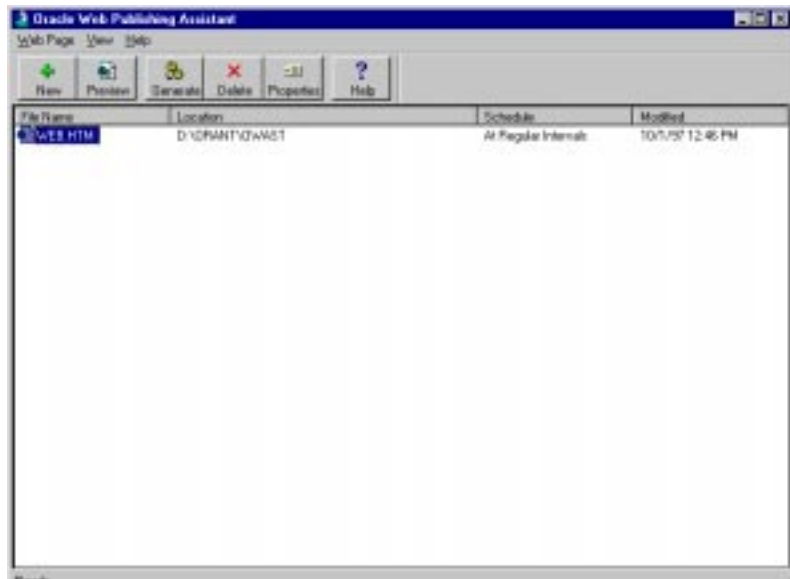

3. Click New. The screen *Create Web Page Wizard - Step 1 of 4* appears:

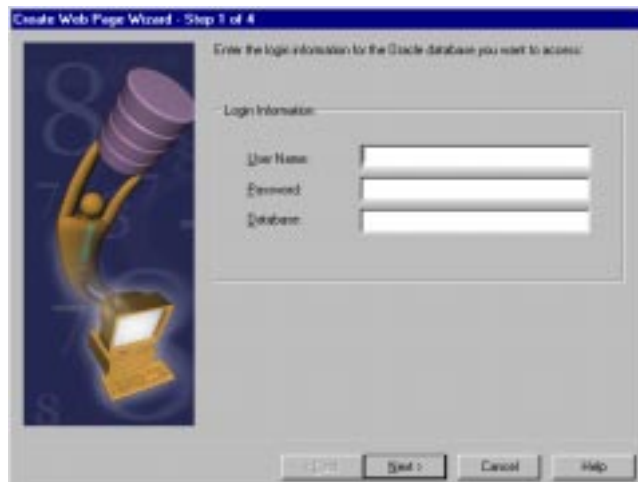

4. Enter database login information, and click Next:

Field	Description
User Name	Enter the user SCOTT.
Password	Enter the password TIGER.
Database	Leave the field blank to connect to the local database.

The screen *Create Web Page Wizard - Step 2 of 4* appears.

5. Select the Enter a SQL Statement method for creating a query, and click Import SQL from Text File.

Use the provided SQL script to enter the SQL statement. The SQL script is stored in an ASCII text file located in the directory ORANT\OWAST\SAMPLES.


6. Select EXAMPLE2.SQL, and click Open. The SQL script appears in the field:



7. Click Next. The screen *Create Web Page Wizard - Step 3 of 4* appears:



8. Select the Once scheduling option.
9. Select any day and any time in the future to generate the web page.
The screen *Create Web Page Wizard - Step 4 of 4* appears.
10. Enter EXAMPLE2.HTM as the file name of the web page.
11. Select Use Template File, and navigate to
ORANT\OWAST\SAMPLES\EXAMPLE2.HTX:

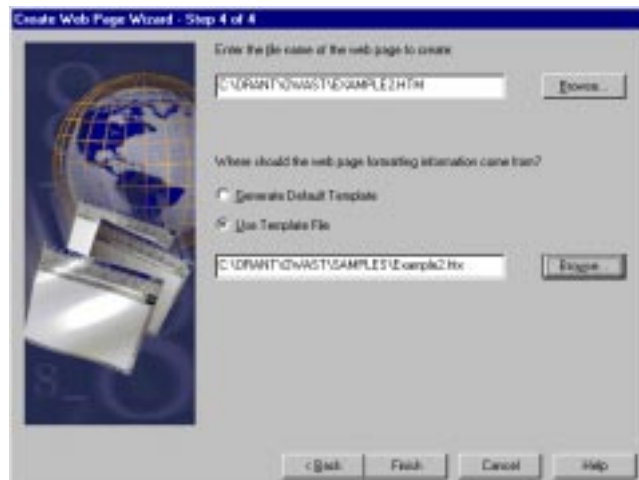

12. Click Next.

The *Summary Screen* appears, confirming that web page creation was successful. Click Finish to dismiss the screen.

The resulting web page EXAMPLE2.HTM looks like this:

Current employees list

King Corporation CEO :

Mr. KING who owns a salary of 3000

First	Last	Salary	Commission	Department Name
SCOTT	ANALYST	3000	0	RESEARCH
FORD	ANALYST	3000	0	RESEARCH
JONES	MANAGER	2875	0	RESEARCH
BLAKE	MANAGER	2850	0	SALES
CLARK	MANAGER	2450	0	ACCOUNTING
ALLEN	SALESMAN	1600	280	SALES
TURNER	SALESMAN	1500	0	SALES
MILLER	CLERK	1300	0	ACCOUNTING
WARD	SALESMAN	1250	560	SALES
MARTIN	SALESMAN	1200	1400	SALES
ADAMS	CLERK	1100	1400	RESEARCH
JAMES	CLERK	950	1400	SALES
SMITH	CLERK	800	1400	RESEARCH

Tutorial 3: Using the EXAMPLE3.HTX Template

The third tutorial uses a template which incorporates the use of frames, enabling you to merge two separate query statements into one web page. This tutorial queries the SCOTT.EMP table (installed automatically when you install Oracle8 Enterprise Edition or Oracle8 using the Typical Installation Option) and formats the retrieved information using the templates EXAMPLE3.HTX and DETAIL.HTX.


To create the web page:

1. Start Oracle Web Publishing Assistant.

From the taskbar, choose Start > Programs > Oracle for Windows NT > Oracle Web Publishing Assistant.


Oracle Web Publishing Assistant appears. To bypass the welcome screen upon subsequent use of Oracle Web Publishing Assistant, clear the checkbox.

2. Click Next. The Oracle Web Publishing Assistant appears:

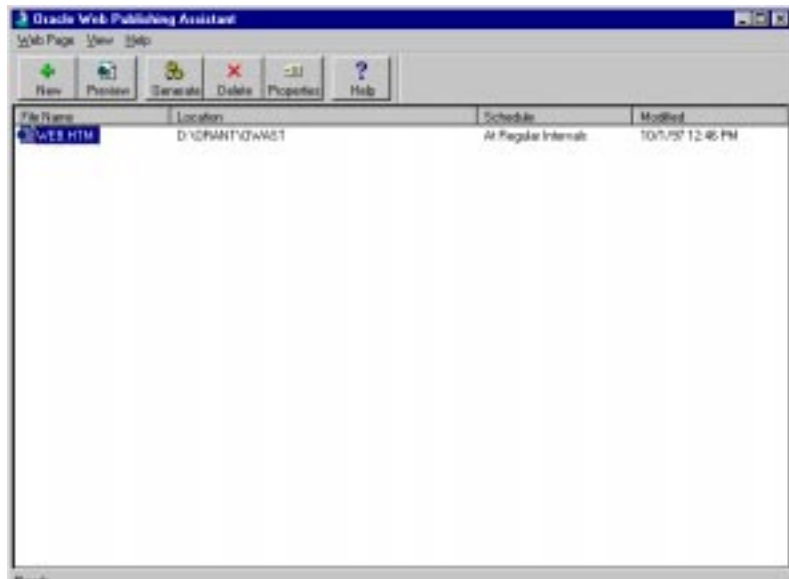

3. Click New.

The screen *Create Web Page Wizard - Step 1 of 4* appears:

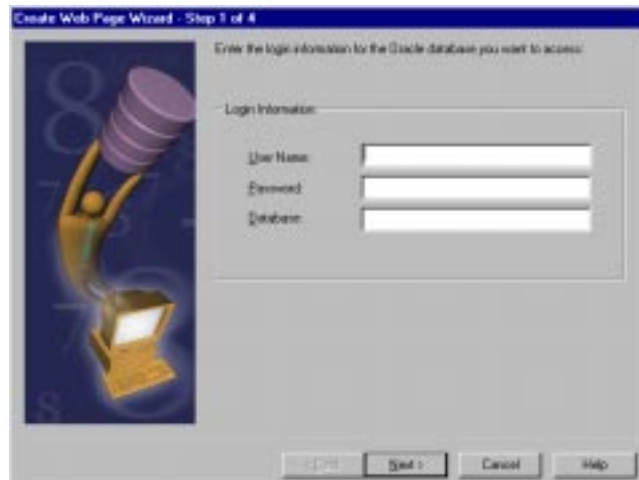

4. Enter database login information, and click Next:

Field	Description
User Name	Enter the user SCOTT.
Password	Enter the password TIGER.
Database	Leave the field blank to connect to the local database.

The screen *Create Web Page Wizard - Step 2 of 4* appears.

5. Select the Enter a SQL Statement method for creating a query, and click Import SQL From Text File.

Use the provided SQL script to enter the SQL statement. The SQL script is stored in an ASCII text file located in the directory ORANT\OWAST\SAMPLES.

6. Select EXAMPLE3.SQL, and click Open. The SQL script appears in the field:



7. Click Next.

The screen *Create Web Page Wizard - Step 3 of 4* appears.

8. Select the Once scheduling option. Select any day and any time in the future to generate the web page:



9. Click Next. The screen *Create Web Page Wizard - Step 4 of 4* appears:



10. Enter MAIN.HTM as the file name of the web page.

Select Use Template File. Navigate to
ORANT\OWAST\SAMPLES\EXAMPLE3.HTX.

11. Click Next.

The *Summary Screen* appears, confirming that web page creation was successful. Click Finish to dismiss the screen.

The resulting web page MAIN.HTM looks like this:

KING Corporation

Current employee list

Name	Job	Salary	Commission	Department Name
KING	PRESIDENT	5000.00		ACCOUNTING
SCOTT	ANALYST	3000.00		RESEARCH
FORD	ANALYST	3000.00		RESEARCH
JONES	MANAGER	2975.00		RESEARCH
BLAKE	MANAGER	2850.00		SALES
CLARK	MANAGER	2450.00		ACCOUNTING
ALLEN	SALESMAN	1600.00	300.00	SALES
TURNER	SALESMAN	1500.00	0.00	SALES
MILLER	CLERK	1300.00		ACCOUNTING

The web page you have created thus far is similar to the web page in the second tutorial, except that the employee names are linked.

The next section explains how you can further develop the page by incorporating a frame which shows a set of information from a separate query on the same web page. In this example, you will create a frame which shows the details of each employee listed in the first column of the web page when the name of that employee is clicked.

Note that when you pass the mouse pointer over the employee name, an HTML file is linked to the name. The file each employee name points to is what you will be creating in the next section, such as EMP#.HTM, where EMP# is the employee number. After you complete the next section, the result will be a file EXAMPLE3.HTM which incorporates the files MAIN.HTM and EMP#.HTM.

To illustrate, the first employee listed is KING. The employee number associated with KING is 7839. In order to create the frame of information, you must know the employee number of each employee. This example will stop with employee KING, but you can create as many as you want.

Current employee list

Name	Job
KING	PRESIDENT
SCOTT	ANALYST
FORD	ANALYST
JONES	MANAGER
BLAKE	MANAGER
CLARK	MANAGER
ALLEN	SALESMAN
TURNER	SALESMAN
MILLER	CLERK
WARD	SALESMAN
MARTIN	SALESMAN

Shutout to C:\ORANT\OWAST\7839.htm [local]

To continue with Tutorial 3 and create the second part of the web page:

12. Repeat Step 3.
13. Repeat Step 4.
14. Select the Enter a SQL Statement method for creating a query, and click Import SQL From Text File.

Use the predefined SQL script EXAMPLE3A.SQL to enter the SQL statement. For more information on how to use the script, see Step 5.

The statement reads:

```
select empno,ename,job,sal,comm,hiredate,dname from emp a, dept b where
a.deptno = b.deptno and empno=emp# order by sal desc;
where emp# is the employee number.
```

15. Click Next.
16. Enter 7839.HTM as the file name for the first employee record for employee KING.

Select Use Template File. Navigate to ORANT\OWAST\SAMPLES\DETAIL.HTX.

17. Click Next.

The *Summary Screen* appears, confirming that the web page creation was successful. Click Finish to dismiss the screen.

18. Open the resulting web page EXAMPLE3.HTM (located in ORANT\OWAST\SAMPLES directory) in your web browser. The page looks like this:



KING Corporation

[Current employees list](#)


Name	Job	Salary	Commission	Department Name
KING	PRESIDENT	5000	0	ACCOUNTING
SCOTT	ANALYST	3000	0	RESEARCH
FORD	ANALYST	3000	0	RESEARCH
JONES	MANAGER	2975	0	RESEARCH
BLAKE	MANAGER	2850	0	SALES
CLARK	MANAGER	2450	0	ACCOUNTING
ALLEN	SALESMAN	1600	30%	SALES
TURNER	SALESMAN	1500	0	SALES
MILLER	CLERK	1300	0	ACCOUNTING

[Employee Details](#)

Number	1235
Name	KING
Job	PRESIDENT
Salary	5000
Commission	0
Hire Date	11-NOV-81
Department Name	ACCOUNTING

19. Repeat Steps 10 through 16 for each frame you want to create.

Note that only the files MAIN.HTM and EMP#.HTM appear in the file listing. The file EXAMPLE3.HTM will not appear in the file listing of Oracle Web Publishing Assistant:

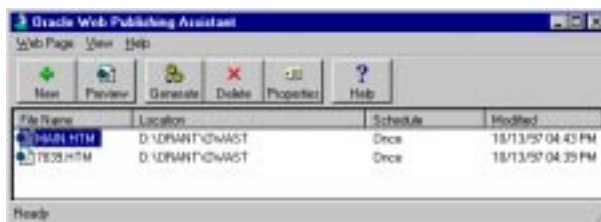

When you are finished creating the frames, your resulting web page will allow a user to see the Employee Details of each of the employees by clicking on the employee name. The information contained in the frame shows the information relevant to the selected name.

Oracle Web Publishing Assistant Repository

The Oracle Web Publishing Assistant Repository stores configuration information. The repository must reside in the registry of the same machine where Oracle Web Publishing Assistant service is running.

Table A-1 Repository Registration Keys

Service Name	Sub-key	Sub-key	Sub-key	Value	Description of Value
Web pages	QueryID	Database	Userid	Oracle userid	Unique identifier, created for each query
	Password	OID	Query	SQL query	Encrypted
	Persistent	Scheduling	Type	Once/repeat/data change/every...	Keep connected to database
	Repeat Unit	Repeat	Date	Complete date/time	Minutes/hours/days/month
	Repeat				Number of repeat units

Service Name	Sub-key	Sub-key	Sub-key	Value	Description of Value
Properties					
				Name	Name of web page
				Path	Location of web page
				Template	Name of template to use
				Parameters	Template parameters
				Created	Data query created

The registry keys (values) are part of the service name registry key itself, allowing for multiple repositories, one for each service. Key names which appear in italics can exist multiple times. All keys listed are sub-keys except for the lowest level which are values.

Troubleshooting

This chapter discusses troubleshooting Oracle Web Publishing Assistant.

Questions and Answers

This section includes answers to some common questions about Oracle Web Publishing Assistant.

My file does not immediately refresh in the Modified column when I click Generate. What should I do?


The file listing will automatically refresh within one minute. If you want to refresh immediately, then choose Refresh from the View menu.

When deleting a web page query, I get the error message “Unable to remove job from Windows NT scheduler”. What does this message mean?

This message is informational. Usually this message indicates that the job has already been removed from the Windows NT scheduler.

How can I display the web page query file names in alphabetical order in the file listing?

Click the File Name column. The web page query file names will be sorted in alphabetical order, rather than in order of the time created. If you click File Name again, then the listing order will reverse.

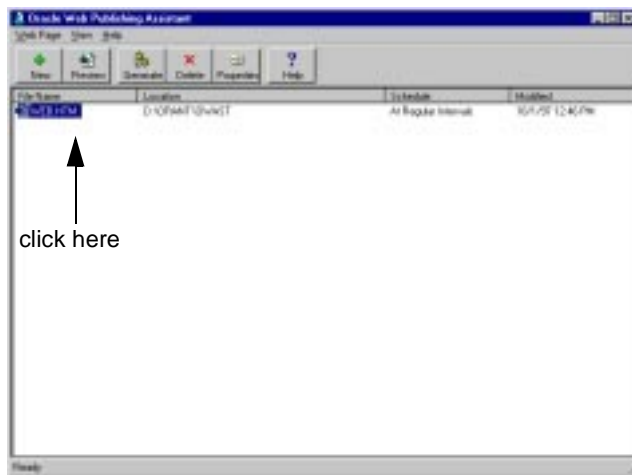

Can I order web page queries in different ways?

You can order web page queries in the listing by File Name, Location, Schedule, and (time and date) Modified. Click on the column name you wish to sort by.

I deleted a web page query from the listing, but I still see the .HTM and .HTX files on my hard drive. Why?

Deleting the web page query from the listing only removes the item from the repository and does not remove any of the associated .HTM or .HTX files. Remove these files manually.

The scheduling choice When Data Changes does not always appear as an option when I use the Create Web Page Wizard. Why?

You can only select When Data Changes if you select a table from the database hierarchy when you use the Create Web Page Wizard.

I created a web page query using the scheduling option Immediately. Why doesn't the web page query appear on the listing?

The scheduling option Immediately creates the web page *once* when you finish with your web page query creation. You have not scheduled it to be generated again. Therefore, it will not appear in the listing. To view the web page query, open the file from within your web browser application.

I am trying to build a database query using the database hierarchy in the Create Web Page Wizard, but I keep getting an error message indicating that the query specified is invalid. Why?

Check to see if you specified additional query criteria. The additional query criteria is appended to your query, and incorrect syntax can cause the query to be invalid.

If my web page query does not get generated, where is the error recorded?

All errors are logged in the Windows NT application event queue. Events in the application event queue can be viewed using the Windows NT Event Viewer. From the taskbar, choose Start > Programs > Administrative Tools > Event Viewer.

I have a web page query which is scheduled to be updated on a regular basis, but it is not being updated anymore. What causes this condition, and how can I restart updates without restarting the service?

Check the Windows NT Event Viewer to see why the web page query is no longer being updated. To restart updates, start Oracle Web Publishing Assistant, and click Generate. The web page query is updated, and it will continue to be updated according to the scheduling option you set.

If I click Generate several times in rapid succession, many errors appear in the Event Viewer. Why?

You cannot generate a web page query that is already being generated. If a web page query is already being generated, then the page generator initialization will fail. An error will be written in the application event queue. You can ignore the errors since they will have no impact on Oracle Web Publishing Assistant other than the page will not be generated.

What are the OWPA_ trigger(s) and tables that are in my database account?

The trigger(s) and tables with the prefix OWPA_ are Oracle Web Publishing Assistant objects. They are used to enable the Oracle Web Publishing Assistant service to monitor changes in the database.

How can I copy all of my web page queries to another PC?


Oracle Web Publishing Assistant does not feature an export function, but you can use the Windows NT registry editor to export the repository information from the registry:

1. At the command prompt, type:

```
C:\>regedit
```

2. Navigate to HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\OracleWebAssistant\WebPages.

All of the web page queries are listed under WebPages.

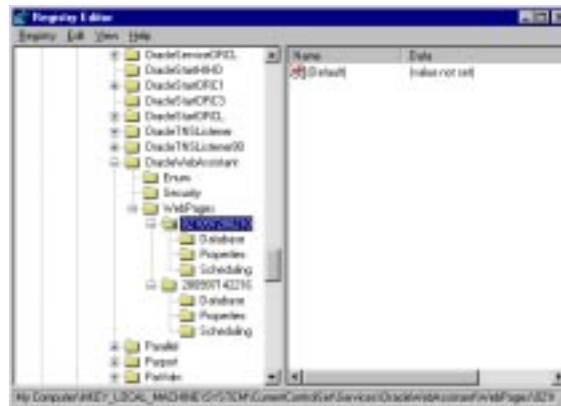

3. Select the web page query you want to export by clicking once on the number corresponding to the Query Id which appears in the File Options tab of the Properties window. See “Viewing and Modifying Properties of Web Page Queries” on page 3-11.
4. From the Registry menu, choose Export Registry File...
5. Specify the volume you want to export the file to, and enter a file name. Confirm that the Export Range is correct.
6. Click Save.

If I select the On Date(s) of the Month scheduling option and choose 31, when will updates occur given that not all months have 31 days?

The web page will be updated only in those months that have 31 days.

I cannot set my system default locale to French. Why?

Due to French government regulations on encryption, you cannot set your system default locale to French (Standard) in the Regional Settings Control Panel of Windows NT.

I cannot enter the time using the spin box with the default time style. Why?

In some language versions on Windows NT, the spin box for entering time in Web Publishing Assistant does not function properly with the default time style. To work around this problem, change the default time style from within the Control Panel before running the Assistant. To change the default time style, click on the "Regional Settings" icon in the Control Panel and select the "Time" property page, and change the time style to "hh:mm:ss".

Index

A

accounts, domain shared and OPSS, 3-2
Administration Tasks
 Deleting Scheduled Web Pages, 3-11
 Editing Query Syntax, 3-14
 Editing Templates, 3-13
 Generating Web Pages, 3-11
 Opening a Scheduled Web Page Query, 3-10
 Refreshing the File Listing of Web Pages, 3-13
 Viewing Properties of a Web Page, 3-11
alias, database, 3-4
asynchronous processing, 1-5

B

begindetail and enddetail, keywords, 2-3
building query, database hierarchy, B-3
button, Create Web Page, 3-3

C

characters, limit, 3-2
conditional logic
 operators, 2-4
 template keyword, 2-3
Conventions, typographical, xv
copying web page query to another PC, B-4
Create Web Page Wizard
 scheduling, B-2
 use of, 3-4
creating
 new web page queries, before you start, 3-2
 new web page queries, tutorial, 4-2

web page queries, button on welcome
 screen, 3-3
web page query Immediately, B-3
CurrentDate variable, 2-5
Customer Support
 contacting, viii

D

database
 account, OWPA triggers and tables, B-3
 alias, 3-4
 connection sharing, 1-3
 hierarchy, building query, B-3
 login information, 3-4
date variable, 2-5
default Oracle home directory, xvi
deleting
 Scheduled Web Pages, 3-11
 web page query, B-1, B-2
directory
 default, xvi
 Oracle home, xiv
displaying, web page query, B-2
domain shared account, using, 3-2

E

Editing
 Query Syntax, 3-14
 Templates, 3-13
enddetail, keyword, 2-3
enlarging event queue log file size, 3-2
error log, B-3

- error message, B-1
 - generating, B-3
 - invalid query, B-3
 - template, 2-3
- error messages
 - resolving, viii
- Event Log Wrapping, setting, 3-2
- event queue log file size, enlarging, 3-2
- exporting
 - Query Id, B-4
 - web page query to another PC, B-4

F

- features, new, 1-3
- file listing
 - displaying web page queries, B-2
 - interface, 1-5
 - refreshing, B-1
 - updating, errors, B-3

G

- Generated Pages
 - structure, 2-7
- generating
 - errors, B-3
 - web page query, B-3
 - web page query, error log, B-3
 - web page query, when, 3-9, 4-5
 - web pages
 - administrative task, 3-11
- GUI, 1-4

H

- HTML editors, support for, 2-7
- .HTX template, 1-3
- HTX template, 1-3

I

- if-then-else statement, template keyword, 2-3
- Immediately, scheduling option, B-3
- installation, 1-6

- interface
 - described, 1-4
 - file listing, 1-5
 - menu and toolbar, 1-4

K

- keyword
 - begindetail and enddetail, 2-3
 - conditional logic, 2-3
 - templates, 2-3

L

- limits
 - characters, 3-2
 - queries, 3-2
- log file
 - event queue, 3-2
 - size setting, 3-2
- login information, 3-4

M

- MaxColumn variable, 2-6
- menu, 1-4
- message
 - errors, B-1
 - invalid query, B-3
- Microsoft Frontpage, support for, 2-7
- modifying
 - queries, 2-2
 - templates, 2-2
- monitoring database changes, OWPA triggers and tables, B-3

N

- new features since version 1.0, 1-3

O

- OCI8, Oracle Call Interface, 1-3
- Opening a Scheduled Web Page Query, 3-10
- OPSS account, using, 3-2
- Oracle

- home directory default, xvi
- terminology, xv
- Oracle Web Publishing Assistant
 - described, 1-2
 - installing, 1-6
- ORANT, Oracle home directory, xiv
- ordering, web page query, B-2
- OWPA, triggers and tables, B-3

P

- page
 - creation, using wizard, 3-3
 - generation, benefit of model used, 2-7
- performance, 2-7
 - enhancements, 1-3
- post installation tasks, 3-2
- Properties sheet, editing templates, 3-13

Q

- queries
 - customize, 3-5
 - error, B-3
 - limit of, in repository, 3-2
- Query Id
 - exporting registry files, B-4
 - variable, 2-7

R

- refreshing
 - file listing, 1-3
 - File Listing of Web Pages, 3-13
 - troubleshooting, B-1
- registry
 - modifying settings, 2-8
- repository
 - key values, A-1
- requirements
 - hardware, 1-5
 - software, 1-6

S

- sample templates, using, 2-2
- scheduling option
 - At Regular Intervals, 3-7
 - described, 3-6
 - Immediately, B-3
 - On Date(s) of the Month, 3-7
 - On Day(s) of the Week, 3-6
 - Once, 3-6
 - When Data Changes, B-2
- scheduling options
 - Immediately, viewing web page, 3-6
- SCOTT/TIGER, tutorial user account, 4-2
- service name, 3-4
- Software Requirements, 1-6

T

- templates
 - conditional logic, if-then-else, 2-3
 - default, 1-3
 - designing, 2-2
 - editing, 2-7
 - editing from Properties sheet, 3-13
 - keyword begindetail, enddetail, 2-3
 - keywords, 2-3
 - model described, 2-7
- Terminology, xv
- time variable, 2-5
- toolbar, 1-4
- triggers and tables, OWPA, B-3
- troubleshooting, viii, B-1
 - deleting web page query, B-1
 - refresh, B-1
- tutorial
 - creating new web page queries, 4-2
 - generate default template, 4-2
- typographical conventions, xv

U

- updating, web page query, problems, B-3

V

values, modifying registry, 2-8

variable

- CurrentDate, 2-5

- MaxColumn, 2-6

- Query Id, 2-7

version 2.0 new features, 1-3

Viewing Properties of a Web Page, 3-11

W

web page

- Create Web Page button, 3-3

- creation, 1-5

- parts described, 2-7

- storage, 3-6

- viewing manually, 3-6

web page query

- copying to another PC, B-4

- defined, 1-2, 3-3

- deleting, B-2

- displaying, B-2

- generating, B-3

- ordering, B-2

web server, 1-2

When Data Changes, scheduling option, B-2

WHERE or ORDER BY clauses

- building queries, 3-5

Windows NT

- Event Viewer

 - application event queue, B-3

 - errors when generating, B-3

- Oracle home directory, xiv

- registry, exporting, B-4

- registry, modifying settings, 2-8

- Scheduler, B-1

wizard, creating new page queries, 3-3