

Oracle9i Application Server

Installation Guide

Release 1.0.2.1.0 for Sun SPARC Solaris

March 2001

Part No. A88725-01

ORACLE®

Contributors: Sanjay Singh, Francisco Abedrabbo, Ramana Adusumilli, Biju Albert, John Bassett, Thomas Fillenwarth, Helen Grembowicz, Yuning He, Mariyln Hollinger, Deanna Kitis, David Ko, Susan Leveille, Jeremy Litz, Mason Ng, Andy Page, Scott Peterson, Tony Quan, Mohan Srinivasan, Deborah Steiner, Liz Trojan, Micheal Wei

The Programs (which include both the software and documentation) contain proprietary information of Oracle Corporation; they are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright, patent, and other intellectual and industrial property laws. Reverse engineering, disassembly, or decompilation of the Programs is prohibited.

The information contained in this document is subject to change without notice. If you find any problems in the documentation, please report them to us in writing. Oracle Corporation does not warrant that this document is error free. Except as may be expressly permitted in your license agreement for these Programs, no part of these Programs may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of Oracle Corporation.

If the Programs are delivered to the U.S. Government or anyone licensing or using the programs on behalf of the U.S. Government, the following notice is applicable:

Restricted Rights Notice Programs delivered subject to the DOD FAR Supplement are "commercial computer software" and use, duplication, and disclosure of the Programs, including documentation, shall be subject to the licensing restrictions set forth in the applicable Oracle license agreement. Otherwise, Programs delivered subject to the Federal Acquisition Regulations are "restricted computer software" and use, duplication, and disclosure of the Programs shall be subject to the restrictions in FAR 52.227-19, Commercial Computer Software - Restricted Rights (June, 1987). Oracle Corporation, 500 Oracle Parkway, Redwood City, CA 94065.

The Programs are not intended for use in any nuclear, aviation, mass transit, medical, or other inherently dangerous applications. It shall be the licensee's responsibility to take all appropriate fail-safe, backup, redundancy, and other measures to ensure the safe use of such applications if the Programs are used for such purposes, and Oracle Corporation disclaims liability for any damages caused by such use of the Programs.

Oracle is a registered trademark, and the Oracle Logo, Oracle9i Application Server, Oracle8i, Oracle9i, Oracle Enterprise Manager, Oracle Internet Directory, and PL/SQL are trademarks or registered trademarks of Oracle Corporation. Other names may be trademarks of their respective owners.

This product includes software developed by the Apache Group for use in the Apache HTTP server project (<http://www.apache.org/>).

This product includes software developed by the OpenSSL project for use in the OpenSSL Toolkit (<http://www.openssl.org/>). This product includes cryptographic software written by Eric Young (ey@cryptsoft.com). This product includes software written by Tim Hudson (tjh@cryptsoft.com).

This product includes software developed by Ralf S. Engelschall (rse@engelschall.com) for use in the mod_ssl project (<http://www.modssl.org/>).

Contents

Send Us Your Comments	vii
Preface.....	ix
1 Requirements	
Hardware Requirements	1-2
Software Requirements	1-3
Certified Software	1-3
Oracle9iAS Wireless Client Requirements.....	1-4
Online Documentation Requirements	1-5
2 Concepts and Preinstallation	
About Oracle9i Application Server.....	2-2
Oracle9i Application Server Components	2-2
Supplemental Components.....	2-7
Preinstallation Tasks	2-8
Setting Environment Variables.....	2-8
Creating UNIX Accounts and Groups.....	2-11
Migration	2-13
Port Changes	2-13
Completing Preinstallation for Specific Installation Options	2-14
Minimal Edition.....	2-15
Standard Edition.....	2-16
Enterprise Edition.....	2-19

About Oracle Universal Installer	2-27
oraInventory Directory	2-27
Starting Oracle Universal Installer	2-28

3 Minimal Edition

Installation	3-2
Postinstallation	3-28
Starting and Stopping Components	3-29
Component Web Sites	3-29
Component Port Numbers	3-30
Additional Documentation	3-30

4 Standard Edition

Installation	4-2
Postinstallation	4-33
Environment Scripts	4-34
Component-specific Tasks	4-34
Starting and Stopping Components	4-35
Component Web Sites	4-36
Component Port Numbers	4-36
Additional Documentation	4-37

5 Enterprise Edition

Installation	5-2
Postinstallation	5-32
Environment Scripts	5-33
Component-specific Tasks	5-34
Starting and Stopping Components	5-42
Component Web Sites	5-43
Component Port Numbers	5-44
Additional Documentation	5-45

6 Non-Interactive Installation

Introduction	6-2
Requirements.....	6-2
Setting a Response File.....	6-2
Specifying a Response File	6-3
Error Handling	6-3
Validation of Values from Response File.....	6-4

7 Deinstallation and Reinstallation

Deinstallation	7-2
Deinstalling Using Oracle Installer	7-2
Deinstalling Oracle9iAS Database Cache.....	7-5
Deinstalling using Oracle Universal Installer	7-6
Reinstallation.....	7-11

A Configuration Tools

Net8 Configuration Assistant	A-2
Oracle9iAS Database Cache Configuration Assistant	A-3
Oracle9iAS Portal Configuration Assistant	A-8
Oracle Database Configuration Assistant	A-17
Oracle Internet File System Configuration Assistant	A-18
Oracle Management Server Configuration Assistant	A-33

B Installing Oracle9i Application Server Administrative and Development Client CD-ROM

Oracle9i Application Server Wireless Edition Client.....	B-2
Service Designer	B-2
Web Integration Developer	B-2
Installation	B-3
Configure the Web Integration Developer	B-3
Oracle Enterprise Manager Client.....	B-4
Oracle Enterprise Manager Console	B-4
DBA Management Pack.....	B-4
Installation	B-4

C Installing Supplemental Components

Overview	C-2
Supplemental Components	C-2
Oracle Gateways	C-2
Oracle Internet Directory	C-3
Oracle Workflow	C-4
Oracle9iAS Email	C-4
Oracle9iAS Unified Messaging	C-5
Oracle Applications Interconnect	C-5

D Enabling SSL for Oracle HTTP Server

Generate the Certification Request.....	D-2
Modify httpd.conf File to Enable SSL	D-3

E Installing Documentation Library

Documentation Library Titles	E-2
Installing the Documentation Library	E-7
File Copy Installation	E-7
Oracle Universal Installer Installation	E-7
Viewing the Documentation Library	E-8
Using the Oracle Information Navigator Applet	E-9
Bypassing the Oracle Information Navigator Applet	E-9

Index

Send Us Your Comments

Oracle9i Application Server Installation Guide, Release 1.0.2.1.0 for Sun SPARC Solaris
Part No. A88725-01

Oracle Corporation welcomes your comments and suggestions on the quality and usefulness of this publication. Your input is an important part of the information used for revision.

- Did you find any errors?
- Is the information clearly presented?
- Do you need more information? If so, where?
- Are the examples correct? Do you need more examples?
- What features did you like most about this manual?

If you find any errors or have any other suggestions for improvement, please indicate the chapter, section, and page number (if available). You can send comments to us in the following ways:

- Electronic mail - iasdocs_us@oracle.com
- Fax - (650) 506-7409 Attn: Oracle9i Application Server Documentation Manager
- Postal service:

Oracle Corporation
Oracle9i Application Server Documentation Manager
500 Oracle Parkway, M/S 2op4
Redwood Shores, CA 94065 USA

If you would like a reply, please give your name, address, and telephone number below.

If you have problems with the software, please contact your local Oracle Support Services.

Preface

This guide describes the installation process for Oracle9i Application Server.

This preface contains these topics:

- [Audience](#)
- [Organization](#)
- [Related Documentation](#)
- [Conventions](#)

Audience

This installation guide is intended for database administrators and others responsible for installing Oracle products. You should be familiar with client/server relationships and database concepts.

Organization

This document contains:

[Chapter 1, "Requirements"](#)

This chapter provides hardware and software requirements for Oracle9i Application Server, Oracle9iAS Wireless client, and the online documentation.

[Chapter 2, "Concepts and Preinstallation"](#)

This chapter provides basic concepts, and preinstallation steps for Oracle9i Application Server.

[Chapter 3, "Minimal Edition"](#)

This chapter guides you through the installation and postinstallation steps for the Minimal Edition installation option for Oracle9i Application Server.

[Chapter 4, "Standard Edition"](#)

This chapter guides you through the installation and postinstallation steps for the Standard Edition installation option for Oracle9i Application Server.

[Chapter 5, "Enterprise Edition"](#)

This chapter guides you through the installation and postinstallation steps for the Enterprise Edition installation option for Oracle9i Application Server.

[Chapter 6, "Non-Interactive Installation"](#)

This chapter guides you through Non-interactive installation steps for Oracle9i Application Server.

[Chapter 7, "Deinstallation and Reinstallation"](#)

This chapter guides you through the deinstallation and reinstallation steps for Oracle9i Application Server.

[Appendix A, "Configuration Tools"](#)

This appendix guides you through the steps required to run component-specific configuration assistants to configure Oracle9i Application Server.

[Appendix B, "Installing Oracle9i Application Server Administrative and Development Client CD-ROM"](#)

This appendix provides an overview, and describes the installation process for the Oracle9i Application Server Administrative and Development Client CD-ROM.

[Appendix C, "Installing Supplemental Components"](#)

This appendix introduces you to the Oracle9i Application Server supplemental components, and provides basic installation instruction.

[Appendix D, "Enabling SSL for Oracle HTTP Server"](#)

This appendix describes steps necessary to enable SSL for Oracle HTTP Server.

[Appendix E, "Installing Documentation Library"](#)

This appendix contains the contents of the Oracle9i Application Server Documentation Library CD-ROM, and provides instructions for installing and viewing the documentation.

Related Documentation

For more information, see these Oracle resources:

- Oracle9i Application Server Documentation Library CD-ROM
- Oracle9i Application Server Platform Specific Documentation on Oracle9i Application Server Disk 1

In North America, printed documentation is available for sale in the Oracle Store at

<http://oraclestore.oracle.com/>

Customers in Europe, the Middle East, and Africa (EMEA) can purchase documentation from

<http://www.oraclebookshop.com/>

Other customers can contact their Oracle representative to purchase printed documentation.

To download free release notes, installation documentation, white papers, or other collateral, please visit the Oracle Technology Network (OTN). You must register online before using OTN; registration is free and can be done at

<http://technet.oracle.com/membership/index.htm>

If you already have a username and password for OTN, then you can go directly to the documentation section of the OTN Web site at

<http://technet.oracle.com/docs/index.htm>

Conventions

This section describes the conventions used in the text and code examples of this documentation set. It describes:

- [Conventions in Text](#)
- [Conventions in Code Examples](#)

Conventions in Text

We use various conventions in text to help you more quickly identify special terms. The following table describes those conventions and provides examples of their use.

Convention	Meaning	Example
Bold	Bold typeface indicates terms that are defined in the text or terms that appear in a glossary, or both.	When you specify this clause, you create an index-organized table .
<i>Italics</i>	Italic typeface indicates book titles or emphasis.	<i>Oracle9i Concepts</i> Ensure that the recovery catalog and target database do <i>not</i> reside on the same disk.
UPPERCASE monospace (fixed-width font)	Uppercase monospace typeface indicates elements supplied by the system. Such elements include parameters, privileges, datatypes, RMAN keywords, SQL keywords, SQL*Plus or utility commands, packages and methods, as well as system-supplied column names, database objects and structures, usernames, and roles.	You can specify this clause only for a NUMBER column. You can back up the database by using the BACKUP command. Query the TABLE_NAME column in the USER_TABLES data dictionary view. Use the DBMS_STATS.GENERATE_STATS procedure.

Convention	Meaning	Example
lowercase monospace (fixed-width font)	Lowercase monospace typeface indicates executables, filenames, directory names, and sample user-supplied elements. Such elements include computer and database names, net service names, and connect identifiers, as well as user-supplied database objects and structures, column names, packages and classes, usernames and roles, program units, and parameter values. Note: Some programmatic elements use a mixture of UPPERCASE and lowercase. Enter these elements as shown.	Enter <code>sqlplus</code> to open SQL*Plus. The password is specified in the <code>orapwd</code> file. Back up the datafiles and control files in the <code>/disk1/oracle/dbs</code> directory. The <code>department_id</code> , <code>department_name</code> , and <code>location_id</code> columns are in the <code>hr.departments</code> table. Set the <code>QUERY_REWRITE_ENABLED</code> initialization parameter to <code>true</code> . Connect as <code>oe</code> user. The <code>JRepUtil</code> class implements these methods.
lowercase monospace (fixed-width font) <i>italic</i>	Lowercase monospace italic font represents placeholders or variables.	You can specify the <i>parallel_clause</i> . Run <code>Uold_release.SQL</code> where <i>old_release</i> refers to the release you installed prior to upgrading.

Conventions in Code Examples

Code examples illustrate SQL, PL/SQL, SQL*Plus, or other command-line statements. They are displayed in a monospace (fixed-width) font and separated from normal text as shown in this example:

```
SELECT username FROM dba_users WHERE username = 'MIGRATE';
```

The following table describes typographic conventions used in code examples and provides examples of their use.

Convention	Meaning	Example
[]	Brackets enclose one or more optional items. Do not enter the brackets.	<code>DECIMAL (digits [, precision])</code>
{ }	Braces enclose two or more items, one of which is required. Do not enter the braces.	<code>{ENABLE DISABLE}</code>
	A vertical bar represents a choice of two or more options within brackets or braces. Enter one of the options. Do not enter the vertical bar.	<code>{ENABLE DISABLE}</code> <code>[COMPRESS NOCOMPRESS]</code>

Convention	Meaning	Example
...	Horizontal ellipsis points indicate either: <ul style="list-style-type: none"> ■ That we have omitted parts of the code that are not directly related to the example ■ That you can repeat a portion of the code 	<pre>CREATE TABLE ... AS subquery;</pre> <pre>SELECT col1, col2, ... , coln FROM employees;</pre>
.	Vertical ellipsis points indicate that we have omitted several lines of code not directly related to the example.	
Other notation	You must enter symbols other than brackets, braces, vertical bars, and ellipsis points as shown.	<pre>acctbal NUMBER(11,2);</pre> <pre>acct CONSTANT NUMBER(4) := 3;</pre>
<i>Italics</i>	Italicized text indicates placeholders or variables for which you must supply particular values.	<pre>CONNECT SYSTEM/system_password</pre> <pre>DB_NAME = database_name</pre>
UPPERCASE	Uppercase typeface indicates elements supplied by the system. We show these terms in uppercase in order to distinguish them from terms you define. Unless terms appear in brackets, enter them in the order and with the spelling shown. However, because these terms are not case sensitive, you can enter them in lowercase.	<pre>SELECT last_name, employee_id FROM employees;</pre> <pre>SELECT * FROM USER_TABLES;</pre> <pre>DROP TABLE hr.employees;</pre>
lowercase	Lowercase typeface indicates programmatic elements that you supply. For example, lowercase indicates names of tables, columns, or files. Note: Some programmatic elements use a mixture of UPPERCASE and lowercase. Enter these elements as shown.	<pre>SELECT last_name, employee_id FROM employees;</pre> <pre>sqlplus hr/hr</pre> <pre>CREATE USER mjones IDENTIFIED BY ty3MU9;</pre>

Requirements

This chapter provides information about the hardware and software items required for the installation of the Oracle9i Application Server, Oracle9iAS Wireless Client, and the online documentation. The topics include:

- [Hardware Requirements](#)
- [Software Requirements](#)
- [Certified Software](#)
- [Oracle9iAS Wireless Client Requirements](#)
- [Online Documentation Requirements](#)

Hardware Requirements

The following table contains the hardware requirements for Oracle9i Application Server.

Hardware Items	Requirements
CPU	A SPARC Processor
Memory	128 MB
Disk Space	Minimal: 625 MB Standard Edition: 1.40 GB Enterprise Edition: 3.7 GB
TMP or Swap Space	500 MB

Make note of the following:

- The disk space must be available on a single disk. Oracle9i Application Server does not support spanning the installation over multiple disks.
- Origin database must have free disk space for the following:
 - System Tablespace: 1 GB
 - User Tablespace: 400 MB
- **For Standard Edition Only:** You will need an additional 430 MB disk space to install the Oracle Enterprise Java Engine database. The database files do not have to be installed on the same disk as the Oracle9i Application Server Oracle home.
- **For Enterprise Edition Only:**
 - Memory for Oracle9iAS Web Cache should be based on the following formula:

$$(\text{average HTTP object size}) * (\text{maximum number of objects you want to cache})$$

Thus, if you want to cache 1,000,000 objects and the average size of the objects is 3 KB, then set the maximum cache size to at least 3 GB.
 - You will require an additional 100 MB disk space for Oracle9iAS Discoverer installation.

Software Requirements

The following table contains the software requirements for Oracle9i Application Server.

Software Items	Version
Operating System	<p>Solaris 2.6</p> <ul style="list-style-type: none"> ■ Motif Runtime patch: 105284-20 or higher ■ Kernel Jumbo patch: 105181-20 or higher ■ Linker patch: 107733-06 or higher ■ Libthread patch: 105568-16 or higher ■ Libc patch: 105210-27 or higher ■ XIM patch: 106040-13 or higher ■ Linker patch: 105490-07 or higher ■ Xserver patch: 105633-36 or higher ■ Traditional Chinese TrueType font (if required): 106409-01 or higher ■ JDK patch: 108091-03 or higher ■ CDE libDtSvc patch: 105669-10 or higher <p>Solaris 2.7</p> <ul style="list-style-type: none"> ■ Thread Library patch: 106980-10 or higher ■ Kernal cluster patch: 106541-09 or higher ■ /kernal/fs/sockfs patch: 109104-01 or higher ■ /usr/lib/fs/fsck patch: 107544-02 or higher ■ Motif Runtime patch: 107081-19 or higher ■ XIM patch: 107636-03 or higher ■ OpenWindows patch: 108376-03 or higher <p>Solaris 2.8: Additional patches not required at this time.</p>

Certified Software

Installation of the Oracle9i Application Server requires an Oracle database. A complete list of certified software, including databases, for Oracle9i Application Server can be found on Oracle*MetaLink*, which can be accessed from the URL below:

<http://metalink.oracle.com>

Oracle9iAS Wireless Client Requirements

The following table contains the requirements for the installation of Oracle9iAS Wireless Client.

See Also: [Appendix B, "Installing Oracle9i Application Server Administrative and Development Client CD-ROM"](#)

Hardware Items	Required
Operating System	Windows NT 4.0, with Service Pack 5.0 or higher Windows 2000
CPU	Pentium 266
Memory	At least 64 MB RAM for running both the Oracle9iAS Wireless Service Designer and Web Integration Developer; at least 32 MB RAM for running the Oracle9iAS Wireless Service Designer.
Disk Space	40 MB for running both the Oracle9iAS Wireless Service Designer and Web Integration Developer; at least 20 MB for running the Oracle9iAS Wireless Service.
JDK 1.2.2	The client system requires JDK 1.2.2. You can install JDK 1.2.2 for Windows NT from the client CD-ROM. Make the JDK directory the first entry in the system environment path.

Online Documentation Requirements

The following table contains the tools and disk space requirements for the installation of the Oracle9i Application Server online documentation.

See Also: [Appendix E, "Installing Documentation Library"](#)

Requirement	Items
Online Readers	Requires any one of the following: HTML <ul style="list-style-type: none">■ Netscape Navigator 3.0 or higher■ Microsoft Internet Explorer 3.0 or higher PDF <ul style="list-style-type: none">■ Acrobat Reader 3.0 or higher■ Acrobat Reader+Search 3.0 or higher■ Acrobat Exchange 3.0 or higher■ PDFViewer Web browser plug-in 1.0 or higher
Disk Space	250 MB

Concepts and Preinstallation

This chapter guides you through the basic concepts and preinstallation steps for Oracle9i Application Server. The following topics provide information about Oracle9i Application Server, environment variables settings, configuration options, and starting Oracle Universal Installer:

- [About Oracle9i Application Server](#)
- [Preinstallation Tasks](#)
- [About Oracle Universal Installer](#)

About Oracle9i Application Server

Oracle9i Application Server is a scalable, secure, middle-tier application server. It enables you to deliver Web content, host Web applications, connect to back-office applications, and access your data on wireless devices. Oracle9i Application Server has three installation options:

- **Minimal Edition:** suitable for Websites that require a lightweight Web server with minimal application support.
- **Standard Edition:** appropriate for smaller Websites that require minimal support for running transactional applications.
- **Enterprise Edition:** recommended for medium to large-sized Websites that handle a high volume of requests and that require robust support for running transactional applications.

Oracle9i Application Server Components

Table 2–1 lists the three installation options for Oracle9i Application Server, and the components that are installed with each option. This is followed by a brief description of each component.

See Also: *Oracle9i Application Server Overview Guide* in the Oracle9i Application Server Documentation Library for detailed information about each component.

Table 2–1 Oracle9i Application Server Components

Component	Minimal Edition	Standard Edition	Enterprise Edition
Oracle9iAS Database Cache			x
Oracle9iAS Discoverer			x
Oracle9iAS Forms Services			x
Oracle9iAS Portal	x	x	x
Oracle9iAS Reports Services			x
Oracle9iAS Web Cache			x
Oracle9iAS Wireless	x	x	x

Table 2–1 Oracle9i Application Server Components(Cont.)

Component	Minimal Edition	Standard Edition	Enterprise Edition
Oracle Advanced Security		x	x
Oracle Business Components for Java (BC4J)	x	x	x
Oracle Database Client Developer Kit	x	x	x
Oracle Enterprise Java Engine		x	x
Oracle Enterprise Manager Client	x	x	x
Oracle HTTP Server	x	x	x
Oracle Internet File System		x	x
Oracle LDAP Client Kit	x	x	x
Oracle Management Server			x
Oracle XML Developer's Kit	x	x	x

Oracle9iAS Database Cache

Oracle9iAS Database Cache improves the performance and scalability of applications that access Oracle databases by storing frequently used data on middle tier machines. With Oracle9iAS Database Cache, your applications can process several times as many requests as their original capacity.

Oracle9iAS Discoverer

Oracle9iAS Discoverer is a business intelligence tool for analyzing data. With Oracle9iAS Discoverer's award-winning user interface, users can access and analyze database data. There are two Oracle9iAS Discoverer products:

- Oracle9iAS Discoverer Plus is the Internet version of the award-winning Windows version of Discoverer. With Discoverer Plus, business professionals can get and analyze data in a company's database without having to understand complex database concepts. Using Wizard dialogs and menus, Discoverer Plus guides users through the steps to get and analyze data to support their business decisions.

- Oracle9iAS Discoverer Viewer is a tool for viewing workbooks created by Discoverer Plus users. Discoverer Viewer can also be used to integrate database output into a Web site and portal. In addition, it is easy both to customize Discoverer Viewer to conform to a particular Web site look-and0feel, and to build custom Discoverer applications for the Web. Discoverer Viewer is optimized for performance and designed to minimize network traffic.

Oracle9iAS Forms Services

Oracle9iAS Forms Services deploys Forms applications with database access to Java clients in a Web environment. Oracle9iAS Forms Services automatically optimizes class downloads, network traffic, and interactions with Oracle database. Applications are automatically load-balanced across multiple servers and, therefore, can easily scale to service any number of requests.

Oracle9iAS Portal

Oracle9iAS Portal is a complete solution for building, deploying and monitoring Web database applications and content-driven Web sites. Oracle9iAS Portal enables you to create and view database objects through an easy-to-use HTML-based interface, and provides tools for creating HTML-based interfaces. It also allows you to resolve performance problems using performance tracking facilities, and enables you to manage database security through its interface.

Oracle9iAS Reports Services

Oracle9iAS Reports Services provides an easy-to-use, scalable, and manageable solution for high-quality database publishing and reporting by creating dynamic reports for the Web and across the enterprise. It enables you to implement a multi-tiered architecture for running your reports.

Oracle9iAS Web Cache

Oracle9iAS Web Cache is a server accelerator caching service that improves the performance, scalability, and availability of frequently used e-business Web sites that run on Oracle9i Application Server and Oracle8i. By storing frequently accessed URLs in virtual memory, Oracle9iAS Web Cache eliminates the need to repeatedly process requests for those URLs on the Web server, and it caches both static and dynamically-generated HTTP content from one or more applications Web servers.

Oracle9iAS Wireless

Oracle9iAS Wireless is a portal service for delivering information and applications to mobile devices. Using Oracle9iAS Wireless, you can create custom portal sites that use different kinds of content, including Web pages, custom Java applications, and XML-based applications. Oracle9iAS Wireless sites make this diverse information accessible to mobile devices without you having to rewrite the content for each target device platform.

Oracle Advanced Security

Oracle Advanced Security provides a comprehensive suite of security features to protect enterprise networks and securely extend corporate networks to the Internet. It provides a single source of integration with network encryption and authentication solutions, single signon services, and security protocols. By integrating industry standards, it delivers unparalleled security to the Oracle network and beyond.

Oracle Business Components for Java (BC4J)

Oracle Business Components for Java is a 100% Java-compatible, XML-powered framework that enables productive development, portable deployment, and flexible customization of multi-tier, database applications from business components.

Oracle Database Client Developer Kit

The Oracle Database Client Developer Kit contains the following client libraries:

- Oracle Java Database Connectivity (JDBC) Drivers
- Oracle Java Messaging Service (JMS) Toolkit
- Oracle SQLJ Translator

Oracle Enterprise Java Engine

Oracle Enterprise Java Engine is an enterprise-class 100% Java-compatible server environment that supports Enterprise JavaBeans, CORBA, and database stored procedures. Oracle Enterprise Java Engine achieves high scalability through its unique architectural design, which minimizes the burden and complexity of memory management when the number of users increases.

Oracle Enterprise Manager Client

Oracle Enterprise Manager Client provides an integrated solution for centrally managing your Oracle environment. Combining a graphical console, Oracle Intelligent Agents, common services, and administrative tools, Oracle Enterprise Manager Client provides a comprehensive systems management platform for managing Oracle9i Application Server. To use this client, you must have a previously installed Oracle Management Server on your network.

Oracle HTTP Server *powered by Apache*

Oracle9i Application Server uses the Oracle HTTP Server, which is built on Apache Web server technology. Oracle HTTP Server offers scalability, stability, speed, and extensibility. It also supports Java Servlets, JavaServer Pages, Perl, PL/SQL, and CGI applications. This component also includes the following sub-components:

- Apache JServ
- mod_jserv
- mod_ose
- mod_plsql
- mod_perl
- mod_ssl
- Oracle JSP
- Perl Interpreter

Oracle Internet File System

Oracle Internet File System is a file system and development platform that stores files in an Oracle8i database. It provides a mechanism for creating, storing, and managing various types of information, from Web pages to email, from spreadsheets to XML files, in a common repository for users to access and update.

Oracle LDAP Client Kit

LDAP (Lightweight Directory Access Protocol) is the emerging Internet standard for directory services. Oracle LDAP Client Kit supports client interaction with any LDAP-compliant directory server; for example, Oracle Internet Directory. The toolkit provides tools and development libraries to support client calls to directory services, encrypted connections, and enables you to manage your directory data.

Oracle Management Server

Oracle Management Server provides distributed control between the database and Oracle9i Application Server in the network. As a central engine for notifications, it processes all system management tasks and administers the distribution of these tasks across the enterprise. Ensure that you do not have multiple Oracle Management Servers installed on a single machine.

Oracle XML Developer Kit

The Oracle XML Developer Kit (XDK) contains the necessary XML components libraries and utilities to give developers the ability to easily XML-enable applications and Web sites. Oracle XDK supports development in Java, C, C++, and PL/SQL with a collection of libraries, command-line utilities, and tools.

Supplemental Components

The following is a list of the supplemental components that are available with Oracle9i Application Server, Release 1.0.2.1:

See Also: [Appendix C, "Installing Supplemental Components"](#) for overview and installation instructions.

- Oracle9iAS Email
- Oracle9iAS Unified Messaging
- Oracle Applications Interconnect
- Oracle Gateways (Informix, Ingres, Sybase)
- Oracle Internet Directory
- Oracle Workflow

Preinstallation Tasks

The preinstallation tasks for the Oracle9i Application Server are divided into the following parts:

- [Setting Environment Variables](#)
- [Creating UNIX Accounts and Groups](#)
- [Migration](#)
- [Port Changes](#)
- [Completing Preinstallation for Specific Installation Options](#)

Setting Environment Variables

The following environment variables must be set before starting the installer.

Note: Be sure your PATH, LD_LIBRARY_PATH, and CLASSPATH are not too long as that might generate errors such as “Word too long” during installation.

ORACLE_HOME

Oracle home is the root directory in which Oracle software is installed.

Oracle9i Application Server cannot share the same Oracle home with other Oracle products. If you have installed other Oracle products, then Oracle9i Application Server must be installed in a different Oracle home. If previously-set Oracle homes exist on the machine where you are installing Oracle9i Application Server on, then refer to "[Preventing Conflicts Between ORACLE_HOMES](#)" below.

Note: Be sure not to install Oracle9i Application Server in an Oracle home containing other Oracle products, including the database. Such an installation could overwrite shared components, causing the products to malfunction.

Preventing Conflicts Between ORACLE_HOMES

To prevent a conflict between the software in an existing Oracle home and Oracle9i Application Server, you must remove all references to the existing Oracle home. The following steps describe removing these references.

1. Unset your existing Oracle home variable by using the following command.

C shell	Bourne/Korn shell
<code>prompt> unsetenv ORACLE_HOME</code>	<code>prompt> export ORACLE_HOME=</code>

2. Edit your PATH, CLASSPATH, and LD_LIBRARY_PATH environment variables so they do not use the existing Oracle home value.

Setting ORACLE_HOME

To set *ORACLE_HOME* environment variable, run the following command.

C shell	Bourne/Korn shell
<code>prompt> setenv ORACLE_HOME full_path</code>	<code>prompt> export ORACLE_HOME=full_path</code>

TNS_ADMIN

TNS_ADMIN points to the directory where Net8 configuration files are stored.

If TNS_ADMIN is set on your system, you will have conflicts between that directory and the directory where the Oracle9i Application Server Net8 configuration files are created. You will also have conflicts if the configuration files are in a common directory outside of the Oracle home for your other Oracle product. For example, your system may use `/var/opt/oracle/tnsnames.ora` for database aliases.

To prevent conflicts between the Net8 configuration files for different Oracle products, copy the configuration files from either TNS_ADMIN or the common directory to *ORACLE_HOME/network/admin* for the other product and unset TNS_ADMIN using the following command.

C shell	Bourne/Korn shell
<code>prompt> unsetenv TNS_ADMIN</code>	<code>prompt> export TNS_ADMIN=</code>

DISPLAY

Setting the `DISPLAY` environment variable enables you to run the Oracle Universal Installer remotely from a local work station. On the system where you run the Oracle Universal Installer, set `DISPLAY` to the system name or IP address of your local workstation.

If you get an Xlib error similar to “Failed to connect to server”, “Connection refused by server”, or “Can’t open display” when starting the installer, then run the commands on your local workstations as listed in the table below.

Shell Types	On server where the installer is running	In session on your workstation
C shell	<code>prompt> setenv DISPLAY hostname:0.0</code>	<code>prompt> xhost +server_name</code>
Borne or Korn shell	<code>prompt> export DISPLAY=hostname:0.0</code>	<code>prompt> xhost +server_name</code>

TMP

During installation, Oracle Universal Installer uses a temporary directory for swap space. This directory must meet the ["Hardware Requirements"](#) listed on page 1-2 before installing Oracle9i Application Server. The installation may fail if you do not have sufficient space. The installer checks for the `TMP` environment variable to locate the temporary directory. If this environment variable does not exist, then the installer uses the `/tmp` directory.

The following are instructions for setting the `TMP` environment variable.

C shell	Bourne/Korn shell
<code>prompt> setenv TMP full_path</code>	<code>prompt> export TMP=full_path</code>

Creating UNIX Accounts and Groups

The following UNIX account and groups are required for the installation process.

UNIX Group Name for the Oracle Universal Installer Inventory

Use the `admintool` or `groupadd` utility to create a group named `oinstall`. The `oinstall` group will own Oracle Universal Installer's `oraInventory` directory. The `oracle` user account that runs the installation must have the `oinstall` group as its primary group.

For more information on these utilities, refer to your operating system documentation.

UNIX Account to Own Oracle Software

The `oracle` account is the UNIX account that owns Oracle software for your system. You must run Oracle Universal Installer from this account.

Create an `oracle` account with the properties listed in [Table 2-2](#).

Table 2-2 Oracle Account Properties

Variable	Property
Login Name	Choose any name to access the account. This document refers to the name as the <code>oracle</code> account.
Group Identifier	The <code>oinstall</code> group.
Home Directory	Choose a home directory consistent with other user home directories. The home directory of the <code>oracle</code> account does not have to be the same as the <code>ORACLE_HOME</code> directory.
Login Shell	The default shell can be either the C, Bourne, or Korn shell.

Note: Use the `oracle` account only for installing and maintaining Oracle software. Never use it for purposes unrelated to the Oracle Universal Installer. Do not use `root` as the `oracle` account.

UNIX Group Names for Privileged Groups

Two groups, the database operator group and the database administrator group, are required for installation. Oracle documentation refers to these groups as OSOPER and OSDBA, respectively. Databases use these groups for operating system authentication. This is necessary in situations where the database is shutdown and database authentication is unavailable.

The privileges of these groups are given to either a single UNIX group or two corresponding UNIX groups. There are two ways to choose which group(s) get the privileges:

- If the `oracle` account is a member of the `dba` group before starting the installer, then `dba` is given the privileges of both OSOPER and OSDBA.
- If the `oracle` account is not a member of the `dba` group, then the installer will prompt you for the group name(s) that get these privileges.

The following table lists the privileges for the OSOPER and OSDBA groups.

Group	Privileges
OSOPER	Permits the user to perform <code>STARTUP</code> , <code>SHUTDOWN</code> , <code>ALTER DATABASE OPEN/MOUNT</code> , <code>ALTER DATABASE BACKUP</code> , <code>ARCHIVE LOG</code> , and <code>RECOVER</code> , and includes the <code>RESTRICTED SESSION</code> privilege.
OSDBA	Contains all system privileges with <code>ADMIN OPTION</code> , and the OSOPER role; permits <code>CREATE DATABASE</code> and time-based recover.

Migration

If you are migrating from a previous version of Oracle9i Application Server, note that Oracle only supports the following options:

- If you are migrating from an earlier release, you must first migrate to Oracle9i Application Server, Release 1.0.2.0 using the instructions for that release. Then migrate from Release 1.0.2.0 to 1.0.2.1 using the instructions below.
- If you are migrating from Oracle9i Application Server, Release 1.0.2.0, then you must perform certain migration tasks before installing Oracle9i Application Server, Release 1.0.2.1.

See Also: *Migrating from Oracle Internet Application Server 1.0.2.0* in the Oracle9i Application Server Platform-specific Documentation. Review the migration guide for any preinstallation tasks before proceeding with installation.

Port Changes

If you are installing Oracle9i Application Server on the same machine as the database, make the following changes to avoid port conflicts:

- Oracle9i Application Server receives requests on port 7777. Be sure that an existing service, such as the database, is not using that port. If port 7777 is already in use, then you should either change the port for that existing service, or deinstall the service if it is not in use.
- Oracle9i Application Server installs another database that listens on port 1521. Change the port for the origin database listener to be, for example, 1526.

Completing Preinstallation for Specific Installation Options

After setting the environment variables and creating UNIX accounts and groups, complete version-specific pre-installation tasks for the Oracle9i Application Server.

The following list directs you to the installation option that you have license to:

- [Minimal Edition](#) on page 2-15
- [Standard Edition](#) on page 2-16
- [Enterprise Edition](#) on page 2-19

Minimal Edition

Minimal Edition does not require any preinstallation tasks.

Proceed to ["About Oracle Universal Installer"](#) on page 2-27 to start the installer.

Standard Edition

The following are the preinstallation steps for the Standard Edition of the Oracle9i Application Server.

Oracle Internet File System

Perform the following tasks to set database parameters for Oracle Internet File System:

Installation of Oracle Internet File System requires reconfiguration of specific database parameters on the server machine.

1. Before changing any parameters, shut down the network listener, interMedia Text servers, and the database.

See Also: *Oracle8i Installation Guide* in the Oracle Database Documentation Library

Set the following Oracle initialization parameters to the values specified. These parameters are contained in the `initSID.ora` file in the `ORACLE_BASE/admin/global_database_name/pfile` directory.

Note: This configuration file may be located in a different directory depending on how the database was installed.

- a. Set the value for `open_cursors` to at least 255.
- b. Set the value for `shared_pool_size` at least 50 MB.
- c. Set the value for `processes` to at least 200.

- d. Make sure there is at least one online non-system rollback segment.

To verify that there is at least one online non-system rollback segment, connect to Oracle as the SYS user with SQL*Plus and execute the following SQL statement:

```
SQL> SELECT segment_name, tablespace_name, status
        FROM dba_rollback_segs;
```

This will result in output that looks like the following table.

Table 2–3 dba_rollback_segs Output

SEGMENT_NAME	TABLESPACE_NAME	STATUS
SYSTEM	SYSTEM	ONLINE
PUBLIC_RS	SYSTEM	ONLINE
USERS_RS	USERS	ONLINE

In this example, USERS_RS is an online non-system rollback segment. To ensure that the rollback segment is always online after a database startup, include the following line in the `initSID.ora` file:

```
rollback_segments = (rbs_name1, .... , rbs_namex)
```

See Also: *Oracle8i Administration Guide* in the Oracle Database Documentation Library

2. Configure the Solaris environment to accommodate the database. To do this, edit the `/etc/system` file and modify the following variables:
 - Set `SEMMSL` to 10 plus the largest `PROCESSES` parameter of any Oracle database on the system.
 - Set `SEMMNS` to the sum of the `PROCESSES` parameter for each Oracle database, adding the largest one twice, then add an additional 10 for each database.

Note: After modifying the `/etc/system` file, you must restart your Solaris system. Without restarting, the required kernel reconfiguration will not take place.

For more information, refer to *Oracle8i Installation Guide*.

3. Restart the network listener and database.
4. Execute the following SQL statement:

```
SQL> SELECT name, value FROM v$parameter WHERE name = 'open_cursors';
```

You should see the `open_cursors` value you entered in the `initSID.ora` file in step 2.

See Also: *Oracle8i Administration Guide* in the Oracle Database Documentation Library

Origin Database Connectivity

Oracle9i Application Server requires an active database connection. The installer uses this connection to add database objects to the origin database. The origin database is the original and primary storage for your data and is typically located on a database server tier.

Before installing Oracle9i Application Server, verify that the origin database and its TNS listener are running.

See Also: *Oracle8i Administration Guide* in the Oracle Database Documentation Library

You have completed the preinstallation tasks for the Oracle9i Application Server. Proceed to "[About Oracle Universal Installer](#)" on page 2-27 to start the installer.

Enterprise Edition

The following are the preinstallation steps for the Enterprise Edition of the Oracle9i Application Server.

Oracle9iAS Web Cache

For TCP/IP performance tuning tips for the computer running Oracle9iAS Web Cache, refer to *Oracle HTTP Server powered by Apache Performance Guide* available on your product CD.

Oracle9iAS Database Cache

Perform the following preinstallation tasks for Oracle9iAS Database Cache:

- [Synchronize the Origin Database Name with its SID](#)
- [Allow Remote Access to the Origin Database](#)
- [Configure the Listener for External Procedures](#)

Synchronize the Origin Database Name with its SID

To use Oracle9iAS Database Cache, the name of your origin database and its System Identifier (SID) must be the same. You can see both the name and SID by executing the following commands in SQL*Plus when logged on as the `sys` user:

```
SQL> select value from v$parameter where name = 'db_name';  
SQL> select instance_name from v$instance;
```

If these values are different, then you must perform the following steps on the origin database machine to change the SID:

1. Shut down the origin database and listener.

See Also: *Oracle8i Installation Guide* and *Oracle8i Administration's Guide* in the Oracle Database Documentation Library for information on shutting down the origin database and listener.

2. Change the value of the `ORACLE_SID` environment variable to the new value. This new value must match the origin database name.
3. Rename the `initSID.ora` and `orapwSID` files to use the new SID.
4. Change the `listener.ora` and `tnsnames.ora` files to use the new SID.

5. Restart the network listener and database.

Allow Remote Access to the Origin Database

To prepare the origin database, you must allow Oracle9iAS Database Cache to access it remotely:

1. Edit the initialization file (`initSID.ora`) of the origin database. If the file contains the `REMOTE_LOGIN_PASSWORDFILE` parameter, then make sure that the value equals `SHARED` or `EXCLUSIVE`. Oracle9iAS Database Cache can use either value. If the parameter is already set to either `SHARED` or `EXCLUSIVE`, then you do not need to change the value.
 - **EXCLUSIVE:** The password file can be used by only one database and the password file can contain user names other than `SYS` and `INTERNAL`.
 - **SHARED:** The password file can be used by more than one database. However, the only user names recognized by the password file are `SYS` and `INTERNAL`.

If the file does not contain the entry, then add it to the file, specifying either `SHARED` or `EXCLUSIVE` as the value. For example, to specify `EXCLUSIVE`, add the following entry to the file:

```
REMOTE_LOGIN_PASSWORDFILE=EXCLUSIVE
```

The `initSID.ora` file is in the `ORACLE_HOME/database` directory for of the origin database.

Check if a password file exists for the database. The file is named `pwdSID.ora`, where `SID` is the system identifier of the origin database.

2. If the file does not exist, create the password file using the `orapwd` utility with the following commands:

```
prompt> orapwd file=orapwSID password=syspw entries=maxRemUsers
```

There are no spaces around the equal sign (=). The parameters have the following meanings:

- **FILE:** The full path name of the password file. The contents of this file are encrypted, and the file is not user-readable. This parameter is mandatory. The types of file names allowed for the password file are operating system specific. Some platforms require the password file to be a specific format and located in a specific directory. Other platforms allow the use of environment variables to specify the name and location of the password file. See your operating system-specific Oracle documentation for the names and locations allowed on your platform.
- **PASSWORD:** The password of the user SYS for the origin database. This parameter sets the password for SYSOPER and SYSDBA. If you issue the `ALTER USER` statement to change the password after connecting to the origin database, both the password stored in the data dictionary and the password stored in the password file are updated.
- **ENTRIES:** The maximum number of users allowed for remote connections. This value must be greater than the number of Oracle9iAS Database Cache nodes that will connect to the origin database.

Configure the Listener for External Procedures

You must configure the listener for the origin database so that it listens for external procedure calls. Follow these steps:

1. Edit the `tnsnames.ora` file for the origin database by adding an entry that enables you to connect to the listener process (and subsequently, the `extproc` process). For example, add the following entry to the `tnsnames.ora` file:

```
EXTPROC_CONNECTION_DATA.US.ORACLE.COM=
  (DESCRIPTION=
    (ADDRESS_LIST=
      (ADDRESS= (PROTOCOL=IPC) (KEY=EXTPROC0))
    )
    (CONNECT_DATA=
      (SID=PLSExtProc)
      (PRESENTATION= RO)
    )
  )
```

Verify the following:

- The service name is “`EXTPROC_CONNECTION_DATA`”. (Note that the domain name can be set to any value appropriate for your network.)
- The `ADDRESS_LIST` contains an `ADDRESS` entry setting “`(PROTOCOL = IPC)`”.

Make a note of the `KEY` value (in this example, it is “`EXTPROC0`”). Also make a note of the `SID` value (in his example, it is “`PLSExtProc`”). These values must match the `KEY` and `SID_NAME` value, respectively, in the corresponding entry in the `listener.ora` file.

2. Edit the `listener.ora` file for the origin database and add the following entries for the external procedure listener:

```
LISTENER_01=
  (DESCRIPTION_LIST=
    (DESCRIPTION=
      (ADDRESS_LIST=
        (ADDRESS= (PROTOCOL= TCP) (HOST = my_hostname) (PORT = 1521))
      )
      (ADDRESS_LIST=
        (ADDRESS= (PROTOCOL= ICP) (KEY=EXTPROC0))
      )
    )
  )
```

Verify the following:

- The ADDRESS_LIST contains an ADDRESS entry setting “(PROTOCOL = IPC)”.
- The ADDRESS_LIST containing “(PROTOCOL = IPC)” has a key value which is the same KEY value from the tnsnames.ora file. In this example, the key value is “EXTPROC0”.

Make a note of the name of the listener that will be used for external procedures. In this example, the listener name is “LISTENER_01”.

3. Edit the listener.ora file and verify that there is a SID for external procedure listener in the listener’s SID list.

```
SID_LIST_LISTENER=
  (SID_LIST=
    (SID_DESC=
      (SID_NAME=PLSExtProc)
      (ORACLE_HOME=/dsk1/oracle/rdbms/OraHome)
      (PROGRAM=extproc)
    )
    ...
    (SID_DESC =
      (GLOBAL_DBNAME = global_DBname)
      (ORACLE_HOME = /dsk1/oracle/rdbms/OraHome)
      (SID_NAME = ias)
    )
  )
```

Verify the following:

- The SID list contains an entry with a SID_NAME that is the same as the SID noted in Step 1. In this example, the SID is “PLSExtProc”.
 - The ORACLE_HOME value for this entry is set to the ORACLE_HOME for the origin database.
 - The PROGRAM value for this entry is “extproc”.
4. Restart the listener if you have made any changes to the configuration files. If the listener name you noted in step 2 is anything other than “LISTENER”, then you will need to start and stop that specific listener. In the following example, the listener name is “LISTENER_01”.

```
prompt> lsnrctl stop listener_01
prompt> lsnrctl start listener_01
```

5. The `extproc` process spawned by the listener inherits the operating system privileges of the listener. So Oracle Corporation strongly recommends that you restrict the privileges for the separate listener process. The process should not have permission to read or write to database files. The owner of this separate process should not be the `oracle` user (which is the default owner of the server executable and database files). Start the listener from a user account that does not have permission to read or write to database files or the Oracle server address space.
6. If not already installed, place the `extproc` executable in the `bin` directory under the `ORACLE_HOME` of the origin database.
7. Minimum configuration for `sqlnet.ora`:

```
NAMES.DEFAULT_DOMAIN = your.Domain.Name
SQLNET.AUTHENTICATION_SERVICES= (NTS)
NAMES.DIRECTORY_PATH= (TNSNAMES, ONAMES, HOSTNAME)
```

Oracle Internet File System

Perform the following tasks to set database parameters for Oracle Internet File System:

Installation of Oracle Internet File System requires reconfiguration of specific database parameters on the server machine.

1. Before changing any parameters, shut down the network listener, interMedia Text servers, and the database.

See Also: *Oracle8i Installation Guide* in the Oracle Database Documentation Library

Set the following Oracle initialization parameters to the values specified. These parameters are contained in the `initSID.ora` file in the `ORACLE_BASE/admin/global_database_name/pfile` directory.

Note: This configuration file may be located in a different directory depending on how the database was installed.

- a. Set the value for `open_cursors` to at least 255.
- b. Set the value for `shared_pool_size` at least 50 MB.
- c. Set the value for processes to at least 200.
- d. Make sure there is at least one online non-system rollback segment.

To verify that there is at least one online non-system rollback segment, connect to Oracle as the SYS user with SQL*Plus and execute the following SQL statement:

```
SQL> SELECT segment_name, tablespace_name, status
        FROM dba_rollback_segs;
```

This will result in output that looks like the following table.

Table 2–4 *dba_rollback_segs Output*

SEGMENT_NAME	TABLESPACE_NAME	STATUS
SYSTEM	SYSTEM	ONLINE
PUBLIC_RS	SYSTEM	ONLINE
USERS_RS	USERS	ONLINE

In this example, `USERS_RS` is an online non-system rollback segment. To ensure that the rollback segment is always online after a database startup, include the following line in the `initSID.ora` file:

```
rollback_segments = (rbs_name1, .... , rbs_namex)
```

See Also: *Oracle8i Administration Guide* in the Oracle Database Documentation Library.

2. Configure the Solaris environment to accommodate the database. To do this, edit the `/etc/system` file and modify the following variables:
 - Set `SEMMSL` to 10 plus the largest `PROCESSES` parameter of any Oracle database on the system.
 - Set `SEMMS` to the sum of the `PROCESSES` parameter for each Oracle database, adding the largest one twice, then add an additional 10 for each database.

Note: After modifying the `/etc/system` file, you must restart your Solaris system. Without restarting, the required kernel reconfiguration will not take place.

For more information, refer to *Oracle8i Installation Guide*.

3. Restart the network listener and database.
4. Execute the following SQL statement:

```
SQL> SELECT name, value FROM v$parameter WHERE name = 'open_cursors';
```

You should see the `open_cursors` value you entered in the `initSID.ora` file in step 2.

See Also: *Oracle8i Administration Guide* in the Oracle Database Documentation Library

Origin Database Connectivity

Oracle9i Application Server requires an active database connection. The installer uses this connection to add database objects to the origin database. The origin database is the original and primary storage for your data and is typically located on a database server tier.

Before installing Oracle9i Application Server, verify that the origin database and its TNS listener are running.

You have completed the preinstallation tasks for the Oracle9i Application Server. Proceed to ["About Oracle Universal Installer"](#) on page 2-27 to start the installer.

About Oracle Universal Installer

Oracle9i Application Server uses Oracle Universal Installer to configure environment variables and to install components. The installer guides you through each step of the installation process, so you can choose configuration options for a customized product.

The installer includes features that perform the following tasks:

- Explore and provide installation options for products
- Detect pre-set environment variables and configuration settings
- Set environment variables and configuration during installation
- Deinstall products

oraInventory Directory

The installer creates the `oraInventory` directory the first time it is run on your machine. The `oraInventory` directory keeps an inventory of products that the installer installs on your machine as well as other installation information. If you have previously installed Oracle products, then you may already have an `oraInventory` directory.

- When a UNIX group name is specified, it grants that group the permission to write to the `oraInventory` directory. If another group attempts to run the installer, then they must have permission to write to the `oraInventory` directory. If they do not have permission, then the installation will fail.
- Be sure the user running the installer has permission to write to the `oraInventory` directory and all its files so that you are allowed to run the installer.
- The location of `oraInventory` is defined in `/var/opt/oracle/oraInst.loc`.
- The latest log file is `oraInventory_location/logs/installActions.log`. Log file names of previous installation sessions take the form `installActionsdatetime.log`.
- Do not delete or manually alter the `oraInventory` directory or its contents. Doing so can prevent the installer from locating products that you have installed on your system.

Starting Oracle Universal Installer

Follow these steps to launch Oracle Universal Installer, which installs Oracle9i Application Server:

1. Stop all Oracle processes and services (for example, the Oracle database).
2. Mount the installation CD-ROM.

The Oracle Product Installation CD-ROM is in RockRidge format. If you are using the Solaris Volume Management software (installed by default in Sun SPARC Solaris), then the CD-ROM is mounted automatically to `cdrom/9ias_1021_disk1` when you insert it in the disk drive. To begin installation, insert the CD labelled Disk 1.

If you are not using the Solaris Volume Management software, then you must mount the CD-ROM manually. To manually mount or unmount the CD-ROM, you must have root privileges. Be sure to unmount the CD-ROM before removing it from the drive.

To manually mount Disk 1 CD-ROM, perform the following tasks:

- a. Insert the Oracle9i Application Server CD-ROM into the CD-ROM drive.
- b. Log in as the root user.
- c. Create the CD-ROM mount point directory.

```
prompt> mkdir mount_point
```

- d. Mount the CD-ROM drive on the mount point directory and exit the root account:

```
prompt> mount options device_name mount_point
prompt> exit
```

The following example mounts the CD-ROM manually on `/cdrom`, without using the Solaris Volume Management software. Execute the following commands as root user.

```
prompt> mkdir /cdrom
prompt> mount -r -F hsfs device_name /cdrom
prompt> exit
```


3. Run Oracle Universal Installer from the CD-ROM.

Note: Be sure you are **not** logged in as the root user when you start the Oracle Universal Installer. If you are, then only the root user will have permissions to manage Oracle9i Application Server.

- a. Log in as the Oracle9i Application Server user.
- b. Start the installer by entering:

```
prompt> mount_point/9ias_1021_disk1/runInstaller
```

Note: Do not use *mount_point* as your working directory when you start the installer. If you do, then you will not be able to eject Disk 1 during the installation process to insert Disk 2.

This launches Oracle Universal Installer through which you can install Oracle9i Application Server.

The list below navigates you to installation instructions for the Oracle9i Application Server edition you are licensed to:

- For instructions for Minimal Edition installation, refer to [Chapter 3, "Minimal Edition"](#).
- For instructions for Standard Edition installation, refer to [Chapter 4, "Standard Edition"](#).
- For instructions for Enterprise Edition installation, refer to [Chapter 5, "Enterprise Edition"](#).
- For instructions for Non-interactive installation, refer to [Chapter 6, "Non-Interactive Installation"](#).

Minimal Edition

This chapter guides you through the installation steps for the Minimal Edition of Oracle9i Application Server. The following topics provide detailed installation steps, and basic postinstallation tasks:

- [Installation](#)
- [Postinstallation](#)

Installation

The following instructions guide you through the Minimal Edition of Oracle9i Application Server.

1. Review the Oracle Universal Installer Welcome screen and click **Next**.

Figure 3–1 *Welcome Screen*



The Welcome screen provides information about the Oracle Universal Installer.


The following function buttons appear on the installation screens.

- **Deinstall Products:** Deinstall individual components or the entire product. This button appears only on the Welcome screen.
- **About Oracle Universal Installer:** View the version number of the installer in use.
- **Exit:** Quit the installation process and exit the installer.
- **Help:** Access detailed information about the functionality of each screen.
- **Installed Products:** View currently installed products or to deinstall the entire product or components.

- **Previous:** Return to the previous screen.
- **Next:** Move to the next screen.

2. Verify the source and destination paths and click **Next**. If you have not previously installed Oracle products on your machine, the “OraInventory Location screen” appears after you click **Next**. Enter the complete location path for oraInventory directory and click **OK**.

Figure 3–2 File Locations Screen

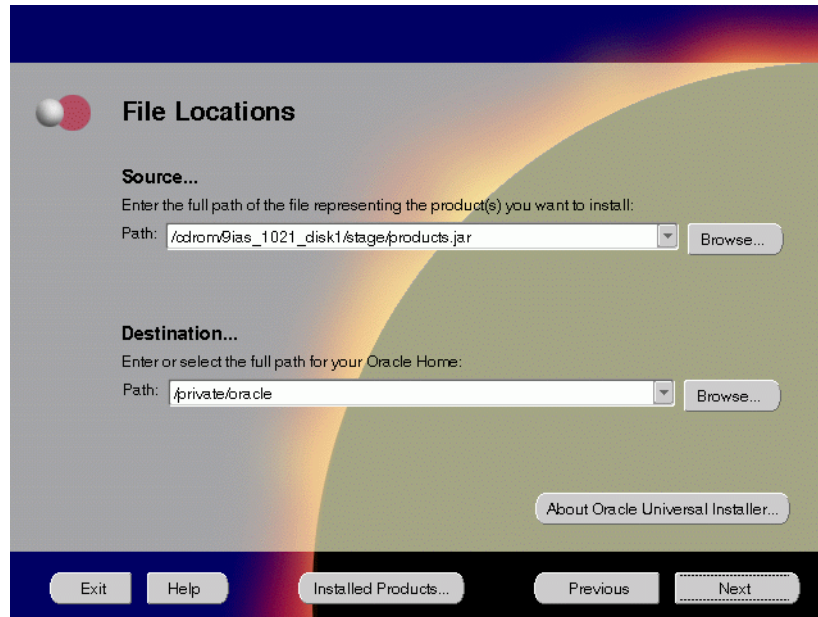

The File Locations screen allows you to enter the full path for the source and destination locations of Oracle9i Application Server.

- **Source:** This is the full path to the `products.jar` file from which the product will be installed. The installer detects and uses the default values of the `products.jar` file of the installation program. Do *not* change the path.
- **Destination:** This is the full path to the Oracle home where the product will be installed. The installer defaults to the Oracle home set in the preinstallation chapter.


Note: Oracle home path must be a real, absolute path. It cannot contain symbolic links, environment variables, or spaces.

For more information regarding Oracle home, refer to "[ORACLE_HOME](#)" on page 2-8.

- **Browse:** Navigate through the file system to find source and destination locations.

3. Enter a UNIX group name and click **Next**. This screen appears only the first time you run Oracle Universal Installer on your machine.

Figure 3–3 UNIX Group Name Screen

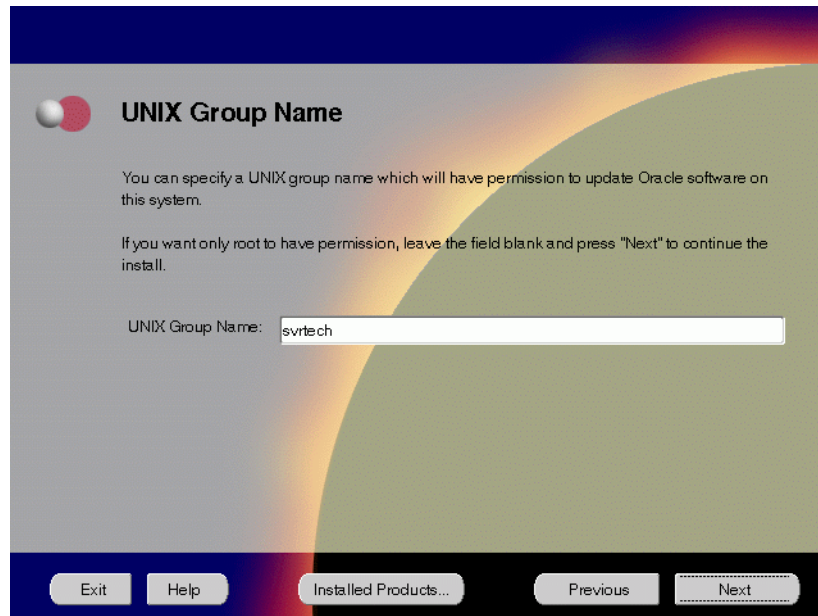

The UNIX Group Name screen grants permission for the `oraInventory` directory to the group specified. For more information, refer to ["UNIX Group Name for the Oracle Universal Installer Inventory"](#) on page 2-11.

UNIX Group Name:

- Enter a UNIX group name for those who have permission to configure all the functionality of Oracle9i Application Server. Verify your group name by entering this command from the UNIX prompt the installer was launched from:


```
prompt> id
```
- Run the `orainstRoot.sh` script from your Oracle home to grant permissions to the root user only. You must have root privileges to run this script. The script creates pointers to the components as the installer installs them in the system so that they can be identified later in the installation

procedure. It produces the `/var/opt/oracle/oraInst.loc` file, which provides a pointer to the `oraInventory` directory.

After you have run the script, click **Retry** to continue.

4. Select Minimal Edition and click **Next**.

Figure 3–4 *Installation Types Screen*

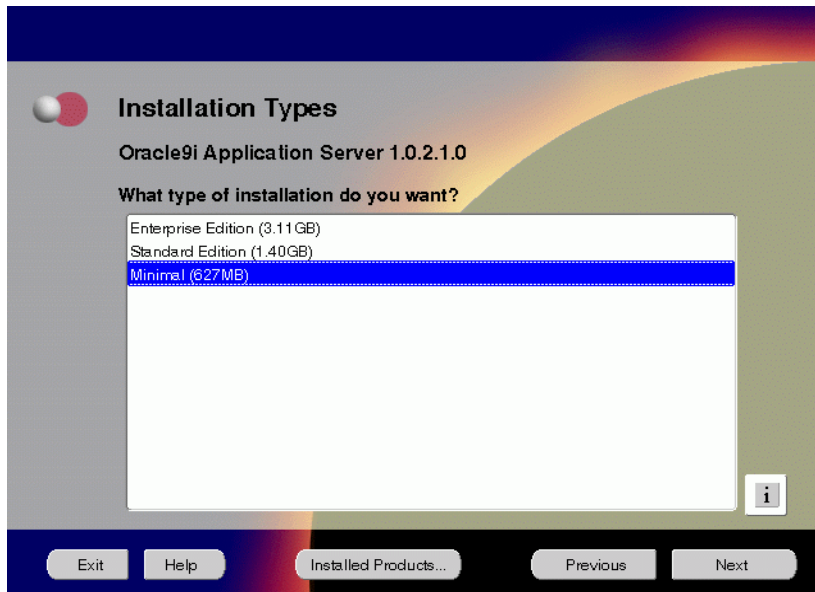

The Installation Types screen allows you to select the Oracle9i Application Server installation option that you are licensed to use.


See Also: [Table 2–1, "Oracle9i Application Server Components"](#) on page 2-2 for a complete list of components.

- **Enterprise Edition:** Installs Oracle9iAS Database Cache, Oracle9iAS Discoverer, Oracle9iAS Forms Services, Oracle9iAS Portal, Oracle9iAS Reports Services, Oracle9iAS Web Cache, Oracle9iAS Wireless, Oracle Enterprise Java Engine, Oracle Enterprise Manager Client, Oracle HTTP Server, Oracle Internet File System, and Oracle Management Server.
- **Standard Edition:** Installs Oracle9iAS Portal, Oracle9iAS Wireless, Oracle Enterprise Java Engine, Oracle Enterprise Manager Client, Oracle HTTP Server, and Oracle Internet File System.
- **Minimal Edition:** Installs Oracle9iAS Portal, Oracle9iAS Wireless, Oracle Enterprise Manager Client, and Oracle HTTP Server.

5. If needed, verify and change the locations of the components displayed on the screen, and click **Next**.

This screen appears only if Oracle Universal Installer has detected insufficient disk space in the Oracle home directory.

Figure 3–5 Component Locations Screen

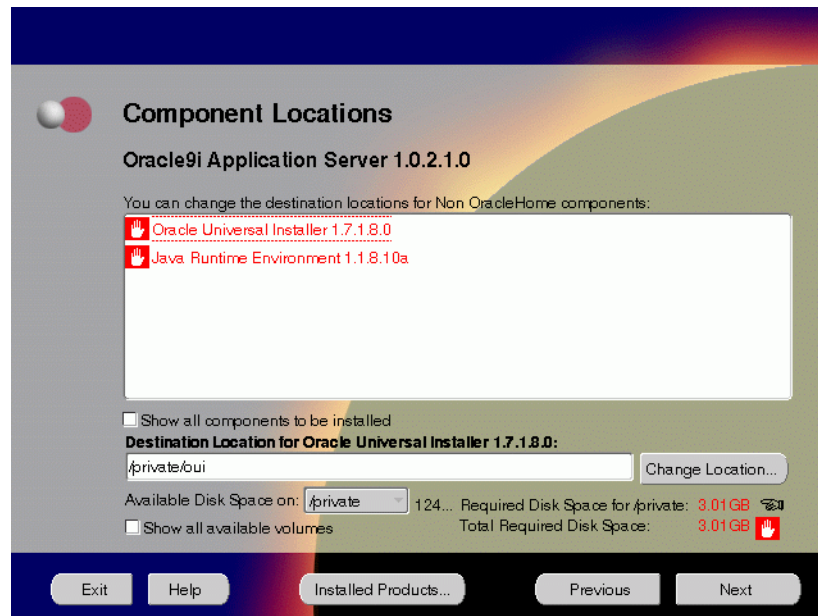

The Component Locations screen allows you to select alternative locations for some components.

- **Show all components to be installed:** To view the complete list of components chosen for installation. Select check box to display component list.

Click individual components to view and change destination location path. The installer enables you to change the destination location of the components displayed on the screen.

- **Destination Location:** To view the full path of the selected component.
- **Change Location:** To browse for alternate locations for the selected component.
- **Available Disk Space:** To view available disk space in the current directory. The installer also provides information about the total disk space required for the installation of additional components.
- **Required Disk Space for *directory_name*:** To view the total disk space required for installation in the selected directory.
- **Total Required Disk Space:** To view the total disk space required for the product to be installed.
- **Show all available volumes:** To browse through file system for available disk space. Select check box to display the file system.

Note: Insufficient disk space is indicated in red with a hand icon next to it.

6. Remove unneeded files from the swap directory to provide sufficient space for installation and click **Next**. If your swap space is smaller than 500 MB, click **Exit** and correct the problem.

Figure 3–6 *Insufficient Swap Space for Install Screen*




The Insufficient Swap Space for Install screen indicated inadequate space in the swap directory. You have two options:

- If you have more than 500 MB swap space, then remove unneeded files from your swap space to create room for installation and click **Next** to proceed.
- If you have less than 500 MB swap space, then **Exit** the installer and set TMP environment variable to point to a writable directory with sufficient space.

For detailed information on TMP directory, refer "[TMP](#)" on page 2-10.

7. Click the help button to verify that all the preinstallation tasks have been performed, and then click **Next**.


Figure 3–7 *Installation Overview Screen*

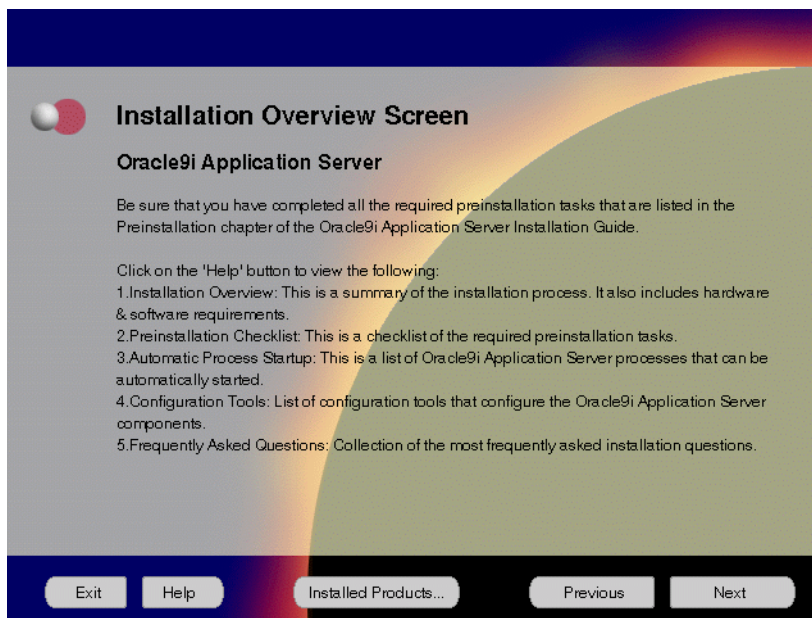

The Installation Overview screen gives you an overview of the installation process. Click on the **Help** button for information on the installation process, preinstallation checklist, automatic process startup, configuration tools, and frequently asked questions.

8. Select the components for configuration and startup after installation and click **Next**.

Figure 3–8 *Component Configuration and Startup Screen*

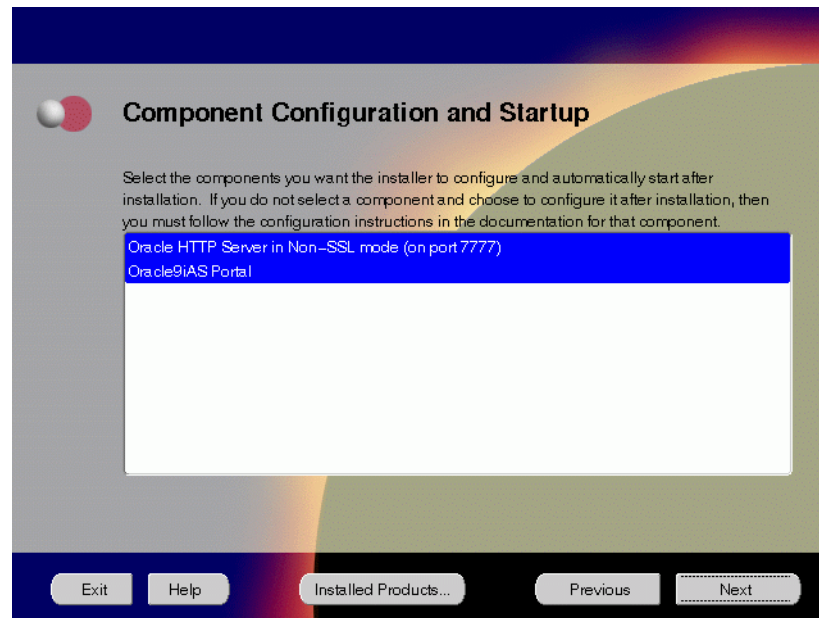

The Component Configuration and Startup screen allows you to select the components that you want the installer to configure and start after installation. This screen offers two configuration options:

- If you select a component here, then the installer prompts you for any or all configuration information required by that component. After installation, the installer starts that component.
- If you de-select a component here, then the installer installs it, but does not configure or start it. After installation, if you decide to use that component, then manually launch the configuration assistant to configure that component.

See Also: [Appendix A, "Configuration Tools"](#)

You can select or de-select multiple components by holding down the Control key while clicking on the component name.

9. Enter or accept the default Portal DAD and Schema names. Also, enter the TNS Connect String, if necessary. Click **Next**.

Figure 3–9 *Apache Listener Configuration for Oracle Portal (DAD and Schema name) Screen*

Apache Listener Configuration for Oracle Portal

Database Access Descriptor (DAD) for Oracle Portal

Enter a name for the DAD that will be used to access Oracle Portal and enter the name of the database schema where Oracle Portal will be installed. If you are installing the Oracle HTTP Server powered by Apache in an Oracle Home other than the one in which Oracle Portal is installed, you must also specify a TNS connect string to the database where Oracle Portal is installed.

Portal DAD Name:

Portal Schema Name:

TNS Connect String:

Note: The TNS connect string must be specified in the tnsnames.ora which must be located in the Oracle Home where you are installing the Oracle HTTP Server.

Exit Help Installed Products... Previous Next

The Apache Listener Configuration for Oracle Portal DAD screen allows you to enter the name of the Database Access Descriptor (DAD) that will be used to access Oracle Portal, and the name of the database schema where Oracle Portal will be installed. It also enables you to enter the TNS connect string if Oracle Portal and Oracle HTTP Server are installed in different Oracle homes. The information you enter here is used to create the PL/SQL Gateway settings which you can access upon installation from the following location:


`http://machine_name:port/pls/admin_/gateway.htm`

- **Portal DAD Name:** Enter the name of the DAD for each instance you installed in the database. A Database Access Descriptor (DAD) is a set of values that specify how the Apache Listener connects to your Oracle database server to fulfill an HTTP request. Based on this DAD name, the installation automatically sets other DAD-related and default settings such as the name and location of the document table. The default DAD name is `portal30`.

- **Portal Schema Name:** Enter the name of the database schema that will contain Oracle Portal. A schema is a collection of components and database objects under the control of a given database user. Each Oracle Portal application maps to an Oracle database schema. The default schema name is `portal30`.
- **TNS Connect String:** Enter the TNS connect string or TNS alias that you will use to connect to the remote Oracle database after installation. It enables you to install the Portal database objects into a remote database. Since you are installing in a new Oracle home, you will need to enter a TNS connect string before it is actually created. The Net8 Assistant will appear later in the installation process to guide you in the configuration of a new TNS alias. Be sure to note the name of the TNS connect string you enter here, so that you will use the same name when the Net8 Assistant appears later.

10. Enter or accept the default Login Server DAD and Schema names. Also, enter the TNS Connect String, if necessary. Click **Next**.

Figure 3–10 *Apache Listener Configuration for Oracle Portal (Login Server) Screen*

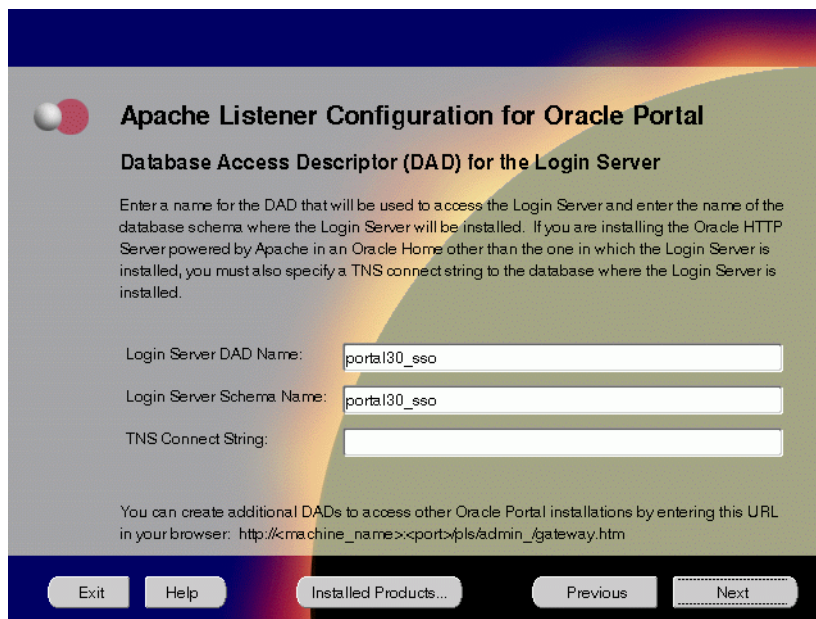

Apache Listener Configuration for Oracle Portal

Database Access Descriptor (DAD) for the Login Server

Enter a name for the DAD that will be used to access the Login Server and enter the name of the database schema where the Login Server will be installed. If you are installing the Oracle HTTP Server powered by Apache in an Oracle Home other than the one in which the Login Server is installed, you must also specify a TNS connect string to the database where the Login Server is installed.

Login Server DAD Name:

Login Server Schema Name:

TNS Connect String:

You can create additional DADs to access other Oracle Portal installations by entering this URL in your browser: `http://<machine_name>:<port>/pls/admin_gateway.htm`

Exit Help Installed Products... Previous **Next**


The Apache Listener Configuration for Oracle Portal screen allows you to enter the Login Server DAD and Schema Name, with a `_sso` extension for easy recognition. The Login Server provides an enterprise-wide Single Sign-On (SSO) mechanism that enables an Oracle Portal user to log in securely to Oracle Portal and any partner and external applications using a single user name and password. It also enables you to enter the TNS Connect String if Oracle Portal and Oracle HTTP Server are installed in different Oracle homes.

- **Login Server DAD Name:** Enter the name of the DAD for each instance you installed in the database. The default DAD name is `portal30_sso`.
- **Login Server Schema Name:** Enter the name of the database schema that will contain Oracle Portal. The default schema name is `portal30_sso`.
- **TNS Connect String:** Enter the TNS connect string or TNS alias that you have defined for the remote Oracle database.

For more information on these fields, refer to the previous screen.

11. Enter the hostname, port number, and SID of the database where you will install the Oracle9iAS Wireless, and click **Next**. If you are upgrading from Oracle9i Application Server, Release 1.0.2, then an “Upgrade Installation Detected” screen will appear. Review the content on the screen and click **Next** or **Exit** accordingly. If you click **Next**, then the installation will continue and the following screen will appear.

Figure 3–11 *Wireless Edition Repository Information Screen*

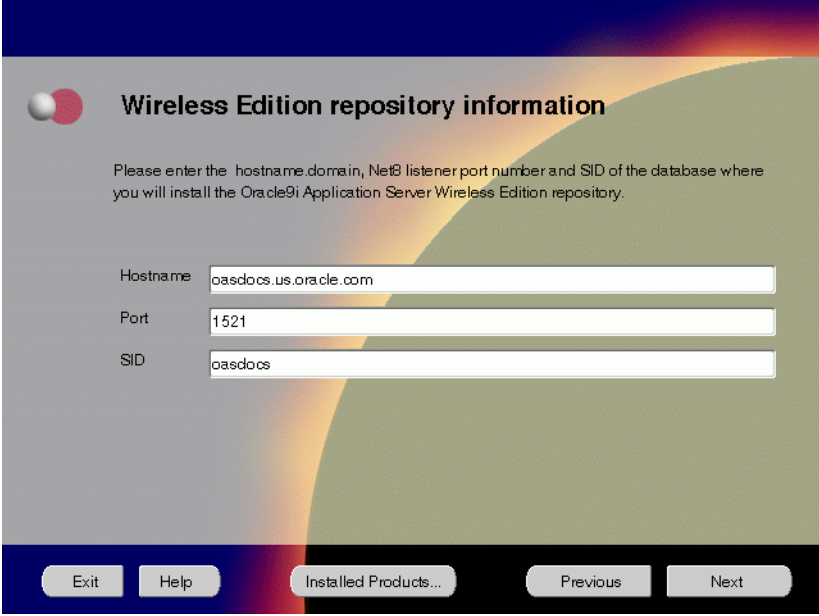The screenshot shows a window titled "Wireless Edition repository information". It contains a text box for "Hostname" with the value "oasdocs.us.oracle.com", a text box for "Port" with the value "1521", and a text box for "SID" with the value "oasdocs". Below the input fields are five buttons: "Exit", "Help", "Installed Products...", "Previous", and "Next". The background of the window has a blue and orange gradient.

Wireless Edition repository information

Please enter the hostname, domain, Net8 listener port number and SID of the database where you will install the Oracle9i Application Server Wireless Edition repository.

Hostname:

Port:

SID:

Exit Help Installed Products... Previous Next

The Wireless Edition Repository Information screen allows you to enter the hostname, Net8 Listener port number, and SID of the database where you will install the Oracle9iAS Wireless repository.


Note: Do not install Oracle9iAS Wireless on Oracle9iAS Database Cache.

- **Hostname:** Enter the `hostname.domain` of the database where you will install the Oracle9iAS Wireless.
- **Port:** Enter the Net8 Listener port number.

- **SID:** Enter the System Identifier (SID) of the database where you will install the Oracle9iAS Wireless repository.

12. Enter the new username and password for the database user to store the Oracle9iAS Wireless repository, and click **Next**. If you are upgrading from Oracle9i Application Server, Release 1.0.2, then the “Oracle9iAS Wireless Schema Information Screen” will be slightly different. Enter the existing Oracle9iAS Wireless username and password, and click **Next**.

Figure 3–12 *Wireless Edition Schema Information Screen*

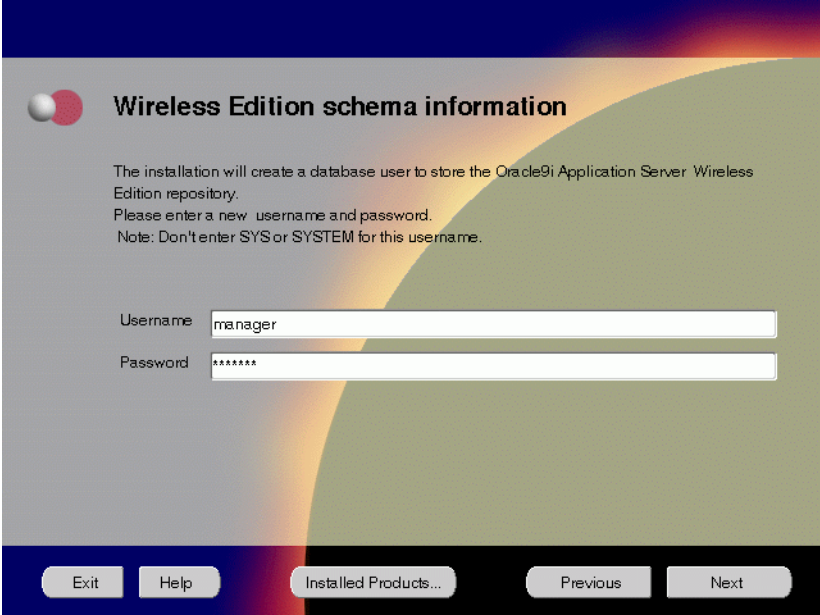The screenshot shows a window titled "Wireless Edition schema information". It contains a small icon of two overlapping spheres (one red, one grey) to the left of the title. Below the title, there is a paragraph of text: "The installation will create a database user to store the Oracle9i Application Server Wireless Edition repository. Please enter a new username and password. Note: Don't enter SYS or SYSTEM for this username." Below this text are two input fields. The first is labeled "Username" and contains the text "manager". The second is labeled "Password" and contains seven asterisks "*****". At the bottom of the window, there is a dark bar with five buttons: "Exit", "Help", "Installed Products...", "Previous", and "Next".

The Wireless Edition Schema Information screen allows you to create a database user to store the Oracle9iAS Wireless repository.

- **Username:** Enter a new user name for the database user to store the Oracle9iAS Wireless repository.
- **Password:** Enter a password for the database user.

Note: Do not use an existing database user, (that is, SYS or SYSTEM) as the username.

13. Enter and confirm the `SYSTEM` password of the database, and click **Next**. If you are upgrading from Oracle9i Application Server, Release 1.0.2, then a “Wireless Edition Administrator Password Information” screen appears. Enter and confirm the “Administrator” password, and click **Next**.

Note: Do not enter the database schema owner password.

Figure 3–13 System Password for Wireless Edition Screen




The System Password for Wireless Edition screen allows you to enter and confirm the `SYSTEM` password of the database where you are loading the Oracle9iAS Wireless repository.

- **Enter Password:** Enter the `SYSTEM` password of the database where you will install the Oracle9iAS Wireless.
- **Confirm Password:** Re-enter the `SYSTEM` password as entered above for verification.

14. Review the summary and click **Install** to begin the installation process.

Figure 3–14 Summary Screen

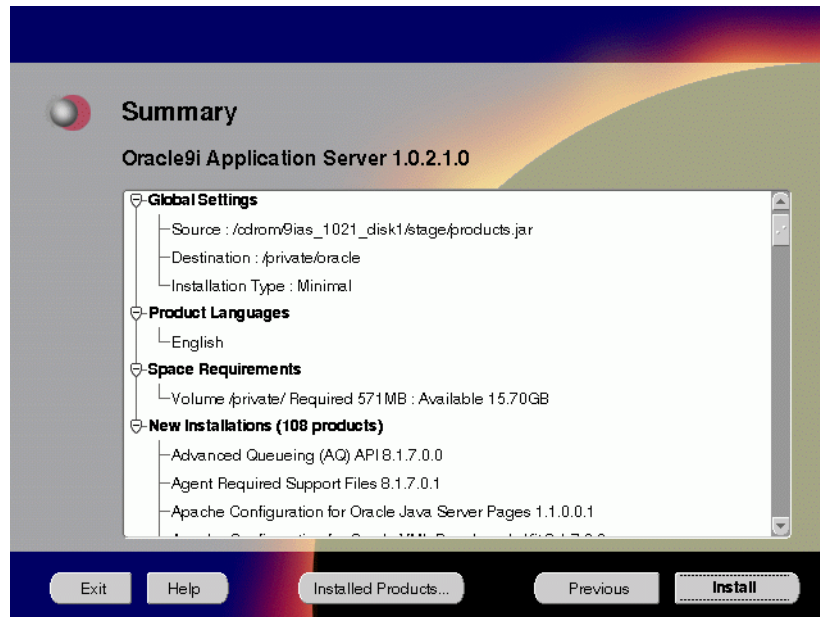

The Summary screen allows you to review all the settings before the actual installation process. These settings include source, destination, installation type, product language, space requirements, and a list of components.


- To make changes to any of these settings, click **Previous** to return to the respective screens.

Note: Insufficient disk space is indicated in red under **Space Requirements**.

When you click **Install**, the installation process begins.

15. Monitor the installation process and after the installer finishes, click **Next**.

Figure 3–15 *Install Screen*

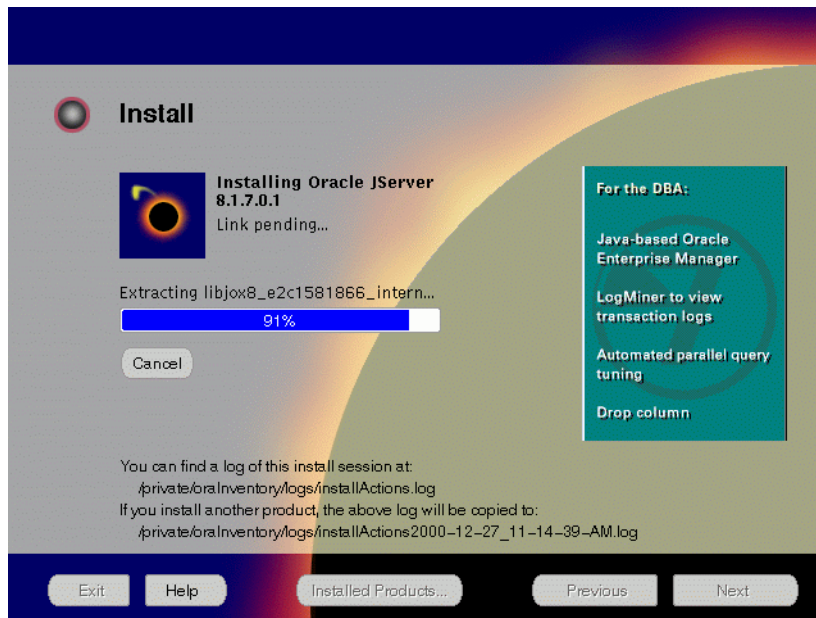

The Install screen appears while the product is installing. Installation operations include executing actions such as file copy and linking, and executing decision points and calculations. It also displays the full path of the installation log.

- **Cancel:** To discontinue the installation process. You can then choose to stop the installation of an individual component or the entire product.

For more information about installation log, refer to "[oraInventory Directory](#)" on page 2-27.

Changing Disks

During installation, the installer prompts you to switch between Disks 1, 2 and 3. Use these steps to change disks and continue the installation process.

Figure 3–16 Changing Disks Dialog



- a. Eject and unmount the current disk.

If you are using Solaris Volume Management software and Disk1 was automatically mounted, then this can be done with the following command:

```
prompt> eject cdrom
```

If you are not using Solaris Volume Management software, then you must manually eject and unmount the disk. For further instructions, refer to your operating system documentation

- b. Insert the next disk into the CD-ROM drive and mount it.

If you are using the Solaris Volume Management software, then the next disk will be automatically mounted.

If you are not using Solaris Volume Management software, then you must manually mount the disk. For further instructions, refer to "[Starting Oracle Universal Installer](#)" on page 2-28.

- c. Click the **Browse** button on the changing disks dialog, and navigate to /cdrom/9ias_1021_diskx. This directory may be different depending on where the original disk was mounted.
- d. Click OK to continue the installation process.

Running `root.sh`

After installation is completed, the installer prompts you to run `root.sh` script. Use these steps to run the `root.sh` script.

- a. Log on as the root user.
- b. Go to the Oracle home directory.

```
prompt> cd ORACLE_HOME
```

- c. Run the `root.sh` script.

```
prompt> ./root.sh
```

- d. Exit root user.

Once you see “Finished running generic part of the `root.sh` script” and “Now product-specific root actions will be performed,” exit root user and return to the Install screen.


The `root.sh` script detects:

- Settings of `ORACLE_OWNER`, `ORACLE_HOME` and `ORACLE_SID` environment variables.
- Full path of local bin directory. You can accept the default or change to a different local bin directory.

16. Verify the list of configuration tools and click **Next**. This screen appears only if you select components to configure and start in the Components Configuration and Startup screen.

Note: The installer has completed copying and linking the necessary files. Be sure to start the database if it had been shut down for the installation process. The configuration tools such as Oracle9iAS Portal Configuration Assistant need to connect to an active database for configuration purposes.

Figure 3–17 Configuration Tools Screen

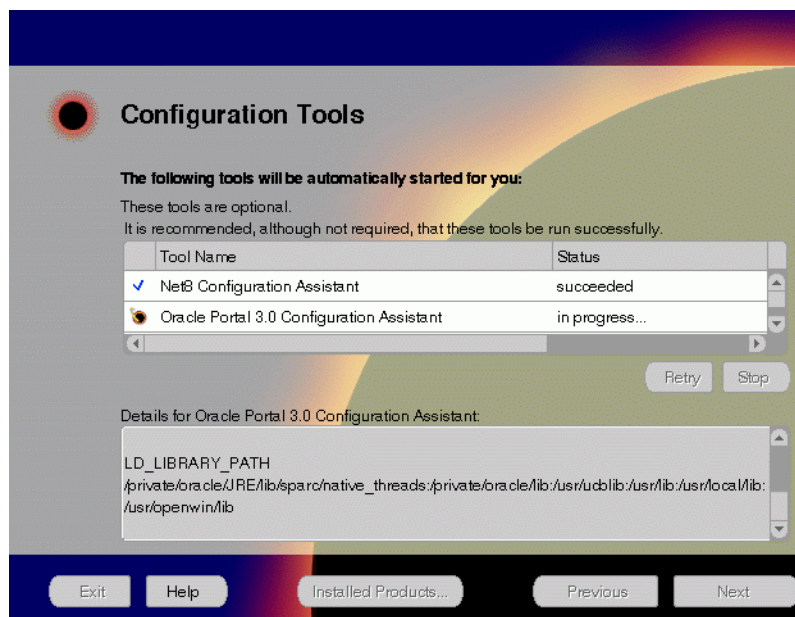

The Configuration Tools screen lists the configuration tools for all installed components.

Scroll down the list to review the configuration status of each tool. The status changes as each component is configured.

The installer performs the following functions in this screen:

- Executes a configuration tool for each component selected previously in the Component Configuration and Startup screen.
- Displays all the configuration settings in the display window below as it executes a configuration tool for each component.
- Enables you to view configuration settings after all configuration tools are executed. Click on each component to review all the changes made.
- Allows you to view data for failed executions in the display window. You can either fix the error and click **Retry** to execute the configuration tool again, or ignore the error and click **Next** to proceed to the next screen.
- **Retry:** To re-execute the configuration script if the configuration of a component fails.
- **Stop:** To quit the configuration process.

Configuration Tools

This installation option launches the following configuration tools:

Net8 Configuration Assistant - This configuration assistant enables you to connect and configure the Oracle client/server network environment.

See Also: *Net8 Administration's Guide* in the Oracle Database Documentation Library for information on running Net8 Configuration Assistant.


Oracle9iAS Portal Configuration Assistant - This configuration assistant loads necessary database objects for Oracle9iAS Portal to run.

See Also: "[Oracle9iAS Portal Configuration Assistant](#)" on page A-8 for instructions on running Oracle9iAS Portal Configuration Assistant.

Starting Web Server in Non-SSL mode on port 7777 - This starts Oracle HTTP Server.

17. Ensure that the installation was successful. Click **Exit** to quit the installer.

Figure 3–18 *End of Installation Screen*

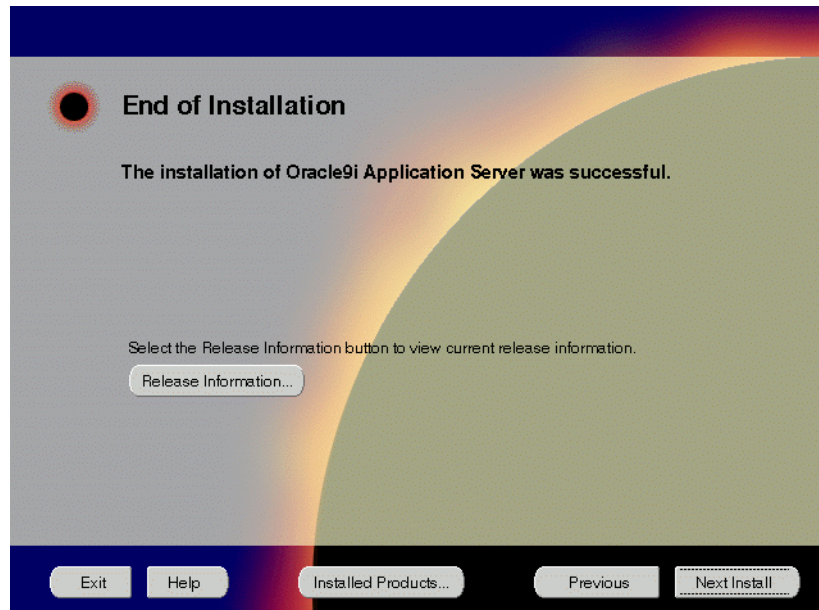

The End of Installation screen appears at the end of the installation process. It notifies you whether the installation was successful or unsuccessful.

- **Release Information:** To view the latest release information.

You have successfully installed the Minimal Edition of Oracle9i Application Server. Proceed to ["Postinstallation"](#) on page 3-28 to complete the installation process.

Postinstallation

The following instructions guide you through the basic postinstallation tasks for Oracle9i Application Server. Before performing these tasks, install, if needed, Oracle9iAS Wireless client from the Oracle9i Application Server Administrative and Development Client CD included in the Oracle9i Application Server CD pack.

See Also: [Appendix B, "Installing Oracle9i Application Server Administrative and Development Client CD-ROM"](#)

The postinstallation contains the following sections:

- [Starting and Stopping Components](#)
- [Component Web Sites](#)
- [Component Port Numbers](#)
- [Additional Documentation](#)

Starting and Stopping Components

[Table 3–1](#) lists the commands needed to start and stop Oracle HTTP Server.

Table 3–1 Starting and Stopping Components

Component	Function	Command
Oracle9iAS Wireless Web Integration Server	Start	<code>ORACLE_HOME/panama/WebIntegration/Server/bin/server.sh</code>
	Stop	Go to <code>http://hostname.domainname:5555</code> and click on shutdown.
Oracle HTTP Server	Start	<code>ORACLE_HOME/Apache/Apache/bin/apachectl start</code>
	Stop	<code>ORACLE_HOME/Apache/Apache/bin/apachectl stop</code>
Oracle HTTP Server SSL-enabled	Start	<code>ORACLE_HOME/Apache/Apache/bin/apachectl startssl</code> (Log in as root user.)
	Stop	<code>ORACLE_HOME/Apache/Apache/bin/apachectl stopssl</code> (Log in as root user.)

Component Web Sites

[Table 3–2](#) lists Web sites for Oracle9i Application Server components.

Table 3–2 Component Web sites

Component	Web Site
Oracle9iAS Portal	<code>http://hostname.domain:7777/pls/portal30</code>
Oracle9iAS Wireless Web Integration Server	<code>http://hostname.domain:5555</code> (Log on as Administrator/manager.)
Oracle HTTP Server	<code>http://hostname.domain:7777</code>
Oracle HTTP Server (SSL-enabled)	<code>https://hostname.domain:80</code>

Component Port Numbers

[Table 3–3](#) lists the default port numbers on which requests are received for each component.

Table 3–3 Port Numbers

Components	Port Number
Oracle9iAS Portal	Oracle9iAS Portal uses the same port number as Oracle HTTP Server
Oracle9iAS Wireless	Oracle9iAS Wireless uses the same port as Oracle HTTP Server
Oracle9iAS Wireless Web Integration Server	5555
Oracle HTTP Server	7777
Oracle HTTP Server (SSL-enabled)	80
Oracle HTTP Server Jserv Servlet Engine	8007

Additional Documentation

For further information on postinstallation and configuration tasks, refer to component-specific documentation. For information on viewing and installing the documentation, refer to [Appendix E, "Installing Documentation Library"](#).

Standard Edition

This chapter guides you through the installation steps for the Standard Edition of Oracle9i Application Server. The following topics provide detailed installation steps, and basic postinstallation tasks:


- [Installation](#)
- [Postinstallation](#)

Installation

The following instructions guide you through the Standard Edition installation option of Oracle9i Application Server.

1. Review the Oracle Universal Installer Welcome screen and click **Next**.

Figure 4–1 Welcome Screen

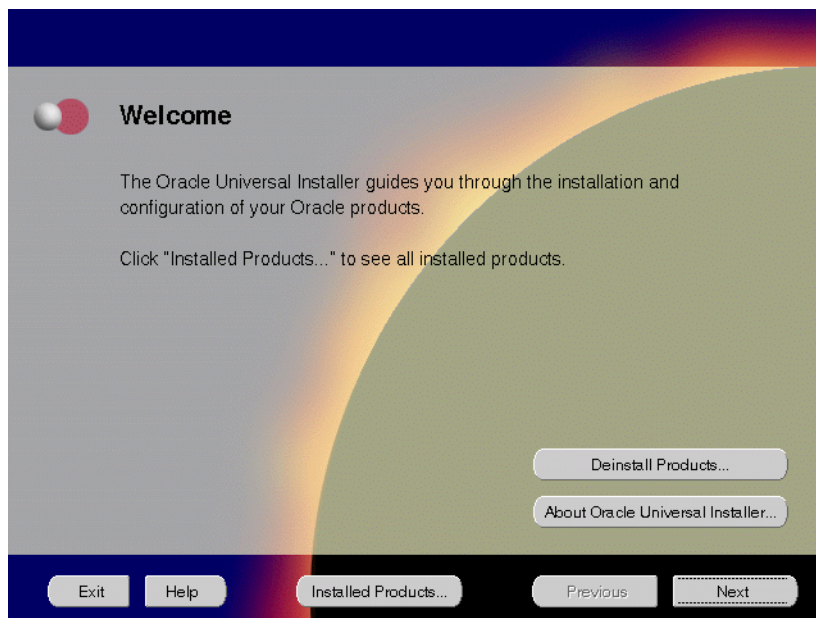

The Welcome screen provides information about the Oracle Universal Installer.


The following function buttons appear on the installation screens.

- **Deinstall Products:** Deinstall individual components or the entire product. This button appears only on the Welcome screen.
- **About Oracle Universal Installer:** View the version number of the installer in use.
- **Exit:** Quit the installation process and exit the installer.
- **Help:** Access detailed information about the functionality of each screen.
- **Installed Products:** View currently installed products or to deinstall the entire product or components.

- **Previous:** Return to the previous screen.
- **Next:** Move to the next screen.

2. Verify the source and destination paths and click **Next**. If you have not previously installed Oracle products on your machine, the “OraInventory Location screen” appears after you click **Next**. Enter the complete location path for oraInventory directory and click **OK**.

Figure 4–2 File Locations Screen

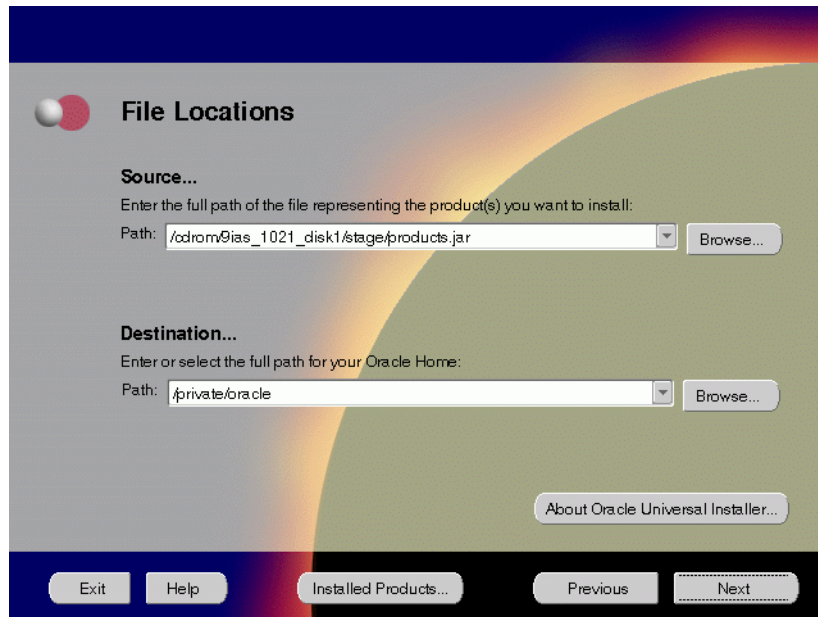

The File Locations screen allows you to enter the full path for the source and destination locations of Oracle9i Application Server.

- **Source:** This is the full path to the `products.jar` file from which the product will be installed. The installer detects and uses the default values of the `products.jar` file of the installation program. Do not change the path.
- **Destination:** This is the full path to the Oracle home where the product will be installed. The installer defaults to the Oracle home set in the pre-installation chapter.


Note: Oracle home path must be a real, absolute path. It cannot contain symbolic links, environment variables, or spaces.

For more information regarding Oracle home, refer to "[ORACLE_HOME](#)" on page 2-8.

- **Browse:** To navigate through the file system to find source and destination locations.

3. Enter a UNIX group name and click **Next**. This screen appears only the first time you run Oracle Universal Installer on your machine.

Figure 4–3 UNIX Group Name Screen

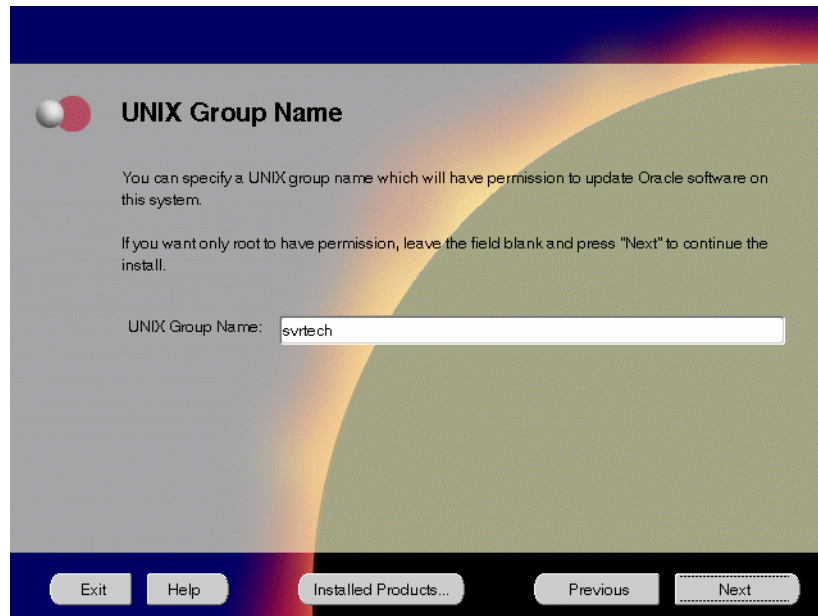

The UNIX Group Name screen grants permission for the `oraInventory` directory to the group specified. For more information, refer to “UNIX Group Name for the Oracle Universal Installer Inventory” on page 2-9.

UNIX Group Name:

- Enter a UNIX group name for those who have permission to configure all the functionality of Oracle9i Application Server. Verify your group name by entering this command from the UNIX prompt the installer was launched from:


```
prompt> id
```
- Run the `orainstRoot.sh` script from your Oracle home to grant permissions to the root user only. You must have root privileges to run this script. The script creates pointers to the components as the installer installs them in the system so that they can be identified later in the installation

procedure. It produces the `/var/opt/oracle/oraInst.loc` file, which provides a pointer to the `oraInventory` directory.

After you have run the script, click **Retry** to continue.

4. Select Standard Edition and click **Next**.

Figure 4–4 *Installation Types Screen*

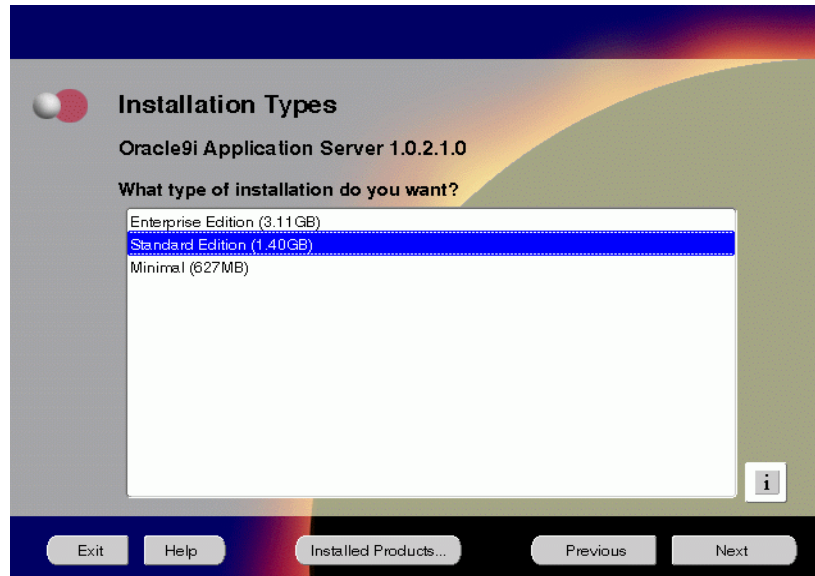

The Installation Types screen allows you to select the Oracle9i Application Server installation option that you are licensed to use.


See Also: [Table 2–1, "Oracle9i Application Server Components"](#) on page 2-2 for a complete list of components.

- **Enterprise Edition:** Installs Oracle9iAS Database Cache, Oracle9iAS Discoverer, Oracle9iAS Forms Services, Oracle9iAS Portal, Oracle9iAS Reports Services, Oracle9iAS Web Cache, Oracle9iAS Wireless, Oracle Enterprise Java Engine, Oracle Enterprise Manager Client, Oracle HTTP Server, Oracle Internet File System, and Oracle Management Server.
- **Standard Edition:** Installs Oracle9iAS Portal, Oracle9iAS Wireless, Oracle Enterprise Java Engine, Oracle Enterprise Manager Client, Oracle HTTP Server, and Oracle Internet File System.
- **Minimal Edition:** Installs Oracle9iAS Portal, Oracle9iAS Wireless, Oracle Enterprise Manager Client, and Oracle HTTP Server.

5. If needed, verify and change the locations of the components displayed on the screen, and click **Next**.

This screen appears only if Oracle Universal Installer has detected insufficient disk space in the Oracle home directory.

Figure 4–5 Component Locations Screen

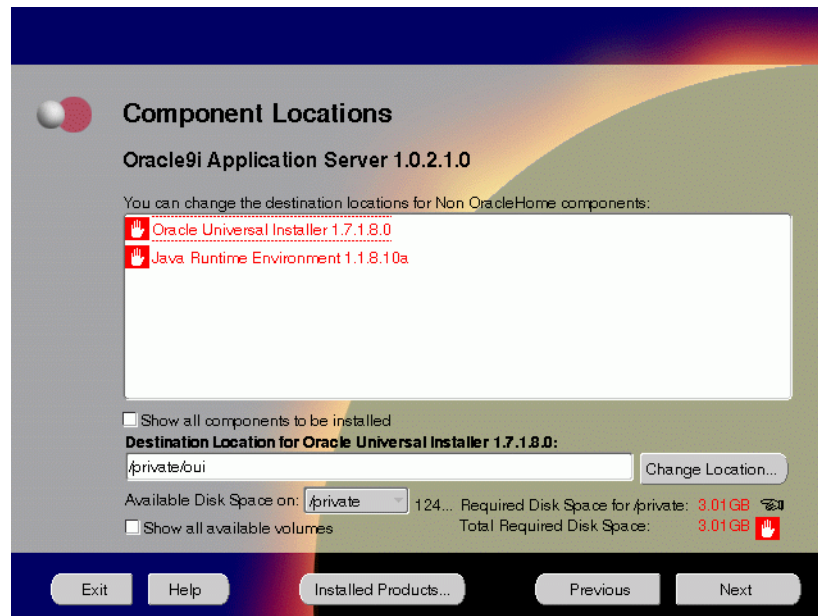

The Component Locations screen allows you to select alternative locations for some components.

- **Show all components to be installed:** To view the complete list of components chosen for installation. Select check box to display component list.

Show all components to be installed: To view the complete list of components chosen for installation. Select check box to display component list. Click individual components to view and change destination location path. The installer enables you to change the destination location of the components displayed on the screen.

- **Destination Location:** To view the full path of the selected component.
- **Change Location:** To browse for alternate locations for the selected component.
- **Available Disk Space:** To view available disk space in the current directory. The installer also provides information about the total disk space required for the installation of additional components.
- **Required Disk Space for *directory_name*:** To view the total disk space required for installation in the selected directory.
- **Total Required Disk Space:** To view the total disk space required for the product to be installed.
- **Show all available volumes:** To browse through file system for available disk space. Select check box to display the file system.

Note: Insufficient disk space is indicated in red with a hand icon next to it.

6. Remove unneeded files from the swap directory to provide sufficient space for installation and click **Next**. If your swap space is smaller than 500 MB, click **Exit** and correct the problem.

Figure 4–6 *Insufficient Swap Space for Install Screen*




The Insufficient Swap Space for Install screen indicated inadequate space in the swap directory. You have two options:

- If you have more than 500 MB swap space, then remove unneeded files from your swap space to create room for installation and click **Next** to proceed.
- If you have less than 500 MB swap space, then **Exit** the installer and set TMP environment variable to point to a writable directory with sufficient space.

For detailed information on TMP directory, refer "[TMP](#)" on page 2-10.

7. Click the help button to verify that all the preinstallation tasks have been performed, and then click **Next**.


Figure 4–7 *Installation Overview Screen*

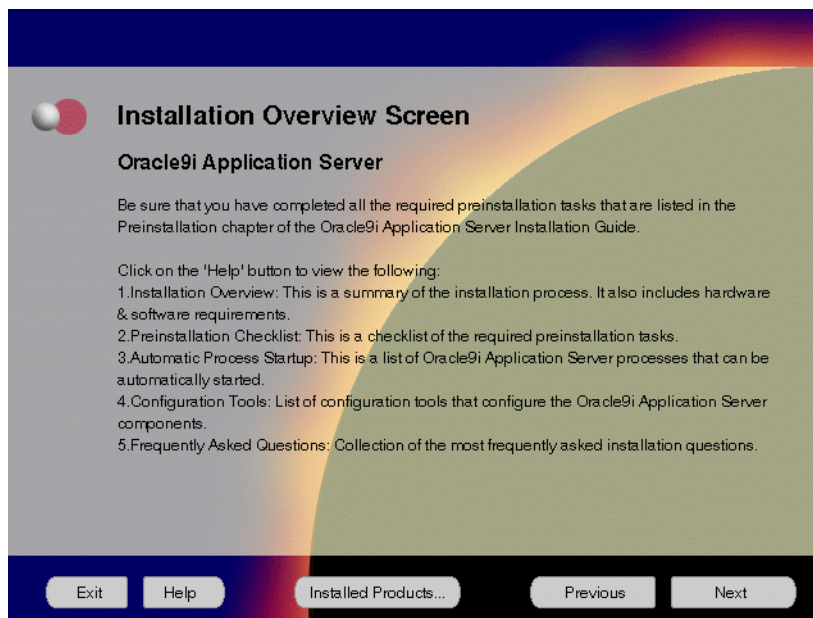

The Installation Overview screen gives you an overview of the installation process. Click on the **Help** button for information on the installation process, preinstallation checklist, automatic process startup, configuration tools, and frequently asked questions.

8. Select the components for configuration and startup after installation and click **Next**.

Figure 4–8 *Component Configuration and Startup Screen*

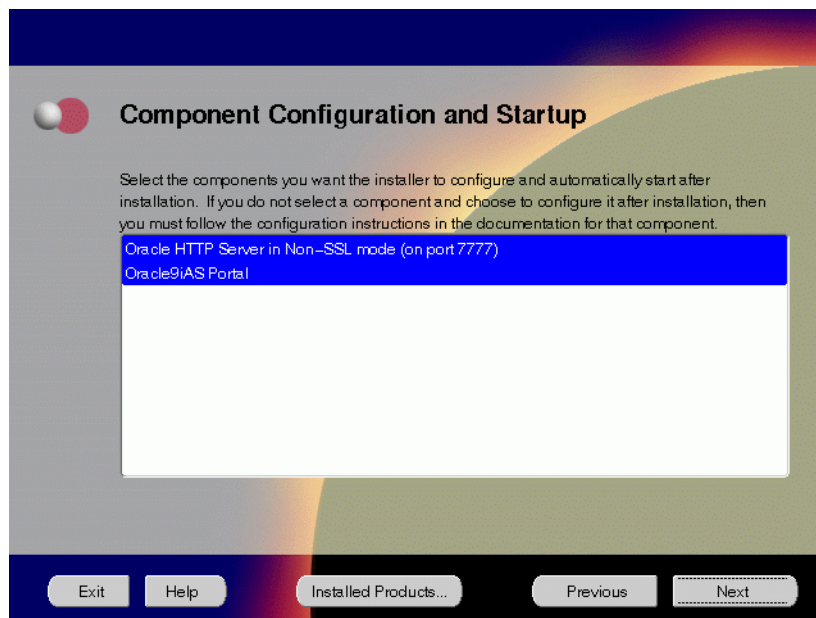

The Component Configuration and Startup screen allows you to select the components that you want the installer to configure and start after installation. This screen offers two configuration options:


- If you select a component here, then the installer prompts you for any or all configuration information required by that component. After installation, the installer starts that component.
- If you de-select a component here, then the installer installs it, but does not configure or start it. After installation, if you decide to use that component, then manually launch the configuration assistant to configure that component.

See Also: [Appendix A, "Configuration Tools"](#)

You can select or de-select multiple components by holding down the Control key while clicking on the component name.

9. Enter the database administrator and operator group name and click **Next**. This screen appears only if the `oracle` account is not a member of the `dba` group.

Figure 4–9 Privileged Operating System Groups Screen

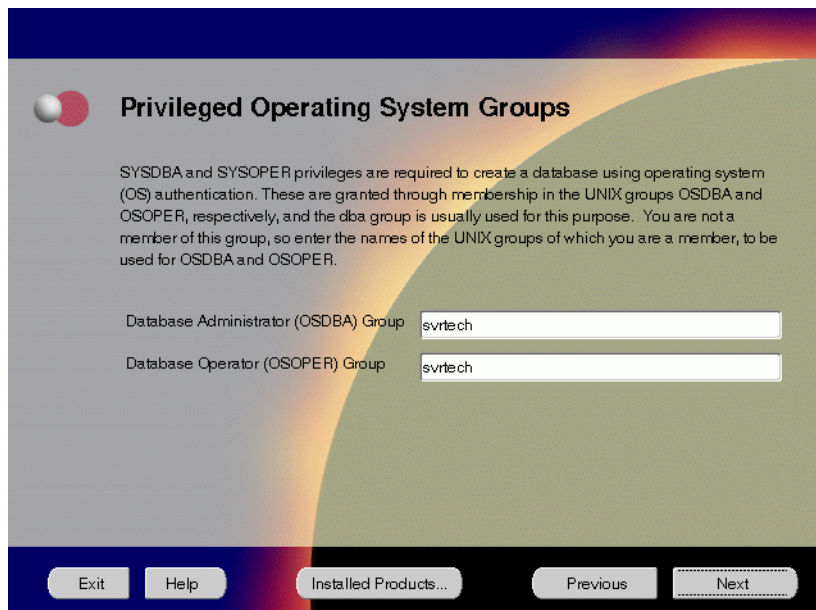The image shows a software installation window titled "Privileged Operating System Groups". It features a dark blue header bar with a red and white circular icon on the left. The main content area has a light gray background with a large, stylized orange and yellow curved graphic on the right. The text explains that SYSDBA and SYSOPER privileges are required and are granted through membership in the UNIX groups OSDBA and OSOPER. It instructs the user to enter the names of the UNIX groups they are a member of. Below the text, there are two input fields: "Database Administrator (OSDBA) Group" and "Database Operator (OSOPER) Group", both containing the text "svrtech". At the bottom, there is a dark blue bar with five buttons: "Exit", "Help", "Installed Products...", "Previous", and "Next".

Privileged Operating System Groups

SYSDBA and SYSOPER privileges are required to create a database using operating system (OS) authentication. These are granted through membership in the UNIX groups OSDBA and OSOPER, respectively, and the dba group is usually used for this purpose. You are not a member of this group, so enter the names of the UNIX groups of which you are a member, to be used for OSDBA and OSOPER.

Database Administrator (OSDBA) Group

Database Operator (OSOPER) Group

Exit Help Installed Products... Previous Next

The Privileged Operating System Groups screen allows you to enter the database administrator and operator group name. For more information regarding privileged group names, refer to "[UNIX Group Names for Privileged Groups](#)" on page 2-12. The installer detects and defaults to the user's OS group.

- **Database Administrator (OSDBA) Group:** The UNIX group that has database administrator privileges.
- **Database Operator (OSOPER) Group:** The UNIX group that has database operator privileges.

10. Enter or accept the default Portal DAD and Schema names. Also, enter the TNS Connect String, if necessary. Click **Next**.

Figure 4–10 *Apache Listener Configuration for Oracle Portal (DAD and Schema name) Screen*

Apache Listener Configuration for Oracle Portal

Database Access Descriptor (DAD) for Oracle Portal

Enter a name for the DAD that will be used to access Oracle Portal and enter the name of the database schema where Oracle Portal will be installed. If you are installing the Oracle HTTP Server powered by Apache in an Oracle Home other than the one in which Oracle Portal is installed, you must also specify a TNS connect string to the database where Oracle Portal is installed.

Portal DAD Name:

Portal Schema Name:

TNS Connect String:

Note: The TNS connect string must be specified in the tnsnames.ora which must be located in the Oracle Home where you are installing the Oracle HTTP Server.

Exit Help Installed Products... Previous **Next**

The Apache Listener Configuration for Oracle Portal DAD screen allows you to enter the name of the Database Access Descriptor (DAD) that will be used to access Oracle Portal, and the name of the database schema where Oracle Portal will be installed. It also enables you to enter the TNS connect string if Oracle Portal and Oracle HTTP Server are installed in different Oracle homes. The information you enter here is used to create the PL/SQL Gateway settings which you can access upon installation from the following location:

`http://machine_name:port/pls/admin_/gateway.htm`

- **Portal DAD Name:** Enter the name of the DAD for each instance you installed in the database. A Database Access Descriptor (DAD) is a set of values that specify how the Apache Listener connects to your Oracle database server to fulfill an HTTP request. Based on this DAD name, the installation automatically sets other DAD-related and default settings such as the name and location of the document table. The default DAD name is `portal30`.

- **Portal Schema Name:** Enter the name of the database schema that will contain Oracle Portal. A schema is a collection of components and database objects under the control of a given database user. Each Oracle Portal application maps to an Oracle database schema. The default schema name is `portal30`.
- **TNS Connect String:** Enter the TNS connect string or TNS alias that you will use to connect to the remote Oracle database after installation. It enables you to install the Portal database objects into a remote database. Since you are installing in a new Oracle home, you will need to enter a TNS connect string before it is actually created. The Net8 Assistant will appear later in the installation process to guide you in the configuration of a new TNS alias. Be sure to note the name of the TNS connect string you enter here, so that you will use the same name when the Net8 Assistant appears later.

11. Enter or accept the default Login Server DAD and Schema names. Also, enter the TNS Connect String, if necessary. Click **Next**.

Figure 4–11 *Apache Listener Configuration for Oracle Portal Screen*

Apache Listener Configuration for Oracle Portal

Database Access Descriptor (DAD) for the Login Server

Enter a name for the DAD that will be used to access the Login Server and enter the name of the database schema where the Login Server will be installed. If you are installing the Oracle HTTP Server powered by Apache in an Oracle Home other than the one in which the Login Server is installed, you must also specify a TNS connect string to the database where the Login Server is installed.

Login Server DAD Name:

Login Server Schema Name:

TNS Connect String:

You can create additional DADs to access other Oracle Portal installations by entering this URL in your browser: `http://<machine_name><port>/pls/admin/_gateway.htm`

[Exit](#) [Help](#) [Installed Products...](#) [Previous](#) [Next](#)

The Apache Listener Configuration for Oracle Portal screen allows you to enter the Login Server DAD and Schema Name, with a `_sso` extension for easy recognition. The Login Server provides an enterprise-wide Single Sign-On (SSO) mechanism that enables an Oracle Portal user to log in securely to Oracle Portal and any partner and external applications using a single user name and password. It also enables you to enter the TNS Connect String if Oracle Portal and Oracle HTTP Server are installed in different Oracle homes.

- **Login Server DAD Name:** Enter the name of the DAD for each instance you installed in the database. The default DAD name is `portal30_sso`.
- **Login Server Schema Name:** Enter the name of the database schema that will contain Oracle Portal. The default schema name is `portal30_sso`.
- **TNS Connect String:** Enter the TNS connect string or TNS alias that you have defined for the remote Oracle database.

For more information on these fields, refer to the previous screen.

12. Enter the Global Database Name and System Identifier (SID) and click **Next**.

Figure 4–12 Database Identification Screen

Database Identification

An Oracle8i database is uniquely identified by a Global Database Name, typically of the form "name.domain". Enter the Global Database Name for this database.

Global Database Name:

A database is referenced by at least one Oracle8i instance which is uniquely identified from any other instance on this computer by an Oracle System Identifier (SID). A suggested SID has been entered which you can accept or change to a value you prefer.

SID:

The Database Identification screen allows you to enter the Global Database name and SID of the database used to run Oracle Enterprise Java Engine applications.


Note: This database is licensed only to run Oracle Enterprise Java Engine applications and should not be used for other purposes. It will be installed in the same Oracle home as Oracle9i Application Server.

- **Global Database Name:** This is the full database name that distinguishes it from any other database in your network domain. For example: `db.us.oracle.com`, where `db` is the name of the database and `us.oracle.com` is the network domain in which the database is located.

- **SID (System Identifier):** This is the database instance name that distinguishes it from any other database on your system. For any database, there is at least one instance associated with the database. The `SID` field defaults to the database name portion of the Global Database Name. (For example: `db`). You can accept or change the default value.

13. Enter the location for the database files and click **Next**.

Figure 4–13 Database File Location Screen

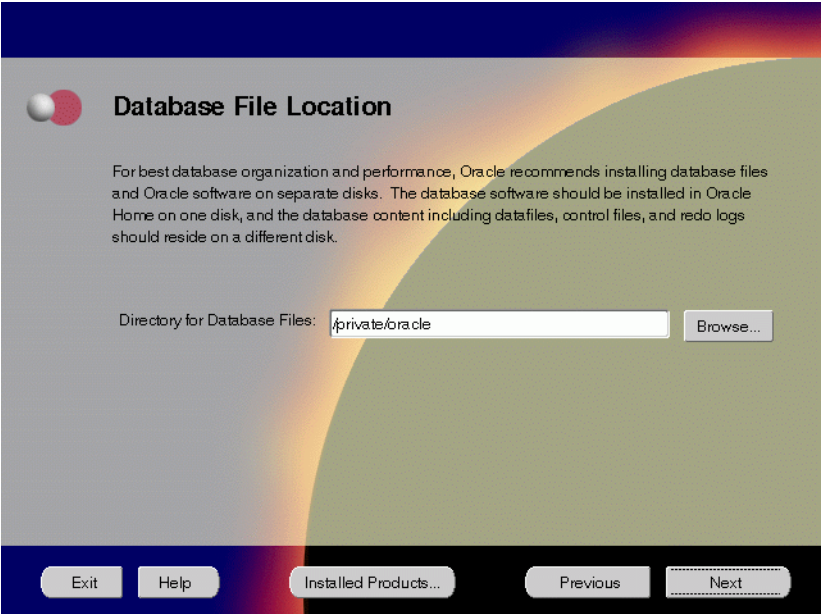

The Database File Location screen allows you to enter the directory name for the database files. Oracle recommends installing the database software and the database content, including files, on separate disks.


- **Directory of Database Files:** This is the directory that contains your data, control, and log files. For example, if you enter `/dbmount`, then the database file locations will be:

File Type	Path Name
Data Files	<code>/dbmount/oradata/<i>SID</i>/*.dbf</code>
Control Files	<code>/dbmount/oradata/<i>SID</i>/*.ctl</code>
Log Files	<code>/dbmount/oradata/<i>SID</i>/*.log</code>

- **Browse:** To navigate the directory structure.

14. Enter the hostname, port number, and SID of the database where you will install the Oracle9iAS Wireless, and click **Next**. If you are upgrading from Oracle9i Application Server, Release 1.0.2, then an “Upgrade Installation Detected” screen will appear. Review the content on the screen and click **Next** or **Exit** accordingly. If you click **Next**, then the installation will continue and the following screen will appear.

Figure 4–14 *Wireless Edition Repository Information Screen*

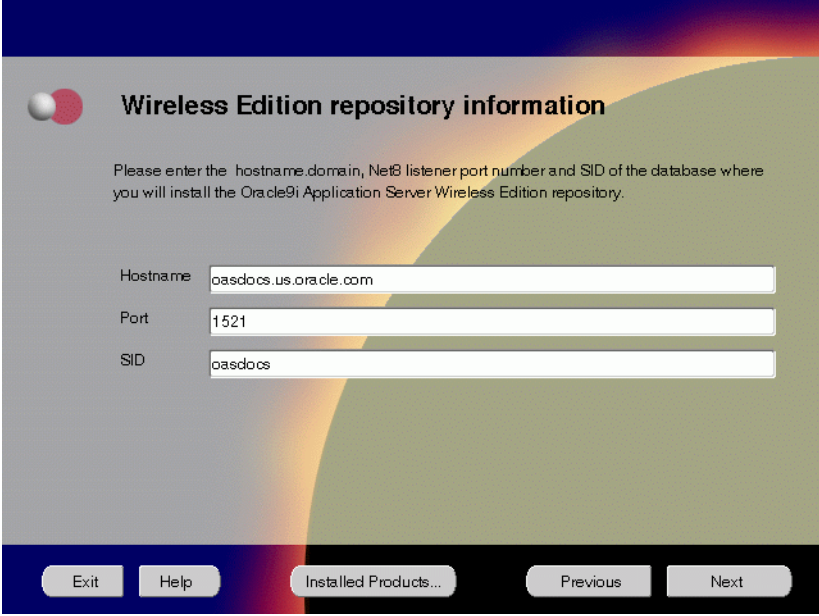The screenshot shows a window titled "Wireless Edition repository information". It has a decorative header with a blue-to-orange gradient and a small sphere icon. Below the title, a message asks the user to enter the hostname, Net8 listener port number, and SID of the database. There are three input fields: "Hostname" with the value "oasdocs.us.oracle.com", "Port" with the value "1521", and "SID" with the value "oasdocs". At the bottom, there is a dark bar with five buttons: "Exit", "Help", "Installed Products...", "Previous", and "Next".

Wireless Edition repository information

Please enter the hostname, domain, Net8 listener port number and SID of the database where you will install the Oracle9i Application Server Wireless Edition repository.

Hostname:

Port:

SID:

Exit Help Installed Products... Previous Next

The Wireless Edition Repository Information screen allows you to enter the hostname, Net8 Listener port number, and SID of the database where you will install the Oracle9iAS Wireless repository.


Note: Do not install Oracle9iAS Wireless on Oracle9iAS Database Cache.

- **Hostname:** Enter the `hostname.domain` of the database where you will install the Oracle9iAS Wireless.
- **Port:** Enter the Net8 Listener port number.

- **SID:** Enter the System Identifier (SID) of the database where you will install the Oracle9iAS Wireless repository.

15. Enter the new username and password for the database user to store the Oracle9iAS Wireless repository, and click **Next**. If you are upgrading from Oracle9i Application Server, Release 1.0.2, then the “Oracle9iAS Wireless Schema Information Screen” will be slightly different. Enter the existing Oracle9iAS Wireless username and password, and click **Next**.

Figure 4–15 *Wireless Edition Schema Information Screen*

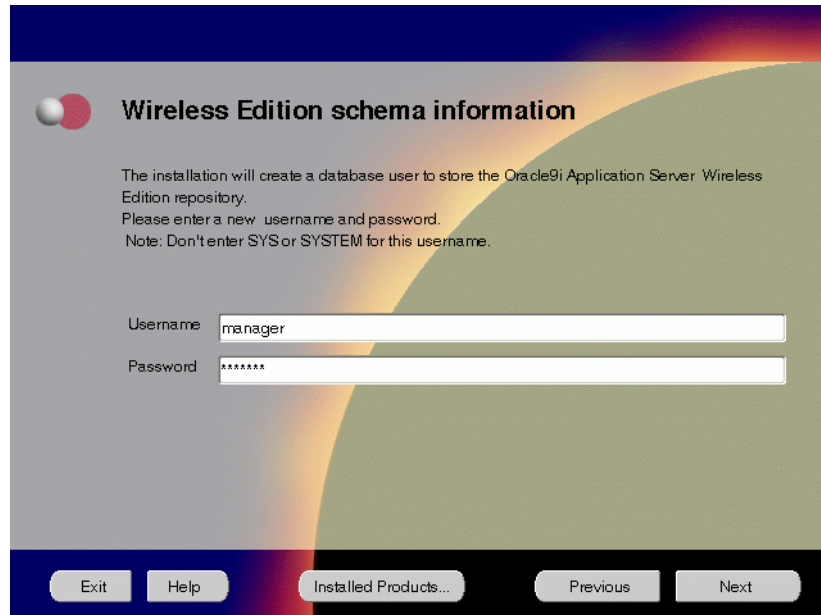The screenshot shows a window titled "Wireless Edition schema information". It contains a message: "The installation will create a database user to store the Oracle9i Application Server Wireless Edition repository. Please enter a new username and password. Note: Don't enter SYS or SYSTEM for this username." Below this are two input fields: "Username" with the text "manager" and "Password" with masked characters "*****". At the bottom, there are five buttons: "Exit", "Help", "Installed Products...", "Previous", and "Next".

Wireless Edition schema information

The installation will create a database user to store the Oracle9i Application Server Wireless Edition repository.
Please enter a new username and password.
Note: Don't enter SYS or SYSTEM for this username.

Username

Password

Exit Help Installed Products... Previous Next

The Wireless Edition Schema Information screen allows you to create a database user to store the Oracle9iAS Wireless repository.

- **Username:** Enter a new user name for the database user to store the Oracle9iAS Wireless repository.
- **Password:** Enter a password for the database user.

Note: Do not use an existing database user, (that is, SYS or SYSTEM) as the username.

16. Enter and confirm the `SYSTEM` password of the database, and click **Next**. If you are upgrading from Oracle9i Application Server, Release 1.0.2, then a “Wireless Edition Administrator Password Information” screen appears. Enter and confirm the “Administrator” password, and click **Next**.

Note: Do not enter the database schema owner password.

Figure 4–16 System Password for Wireless Edition Screen




The System Password for Wireless Edition screen allows you to enter and confirm the `SYSTEM` password of the database where you are loading the Oracle9iAS Wireless repository.

- **Enter Password:** Enter the `SYSTEM` password of the database where you will install the Oracle9iAS Wireless.
- **Confirm Password:** Re-enter the `SYSTEM` password as entered above for verification.

17. Review the summary and click **Install** to begin the installation process.

Figure 4–17 Summary Screen

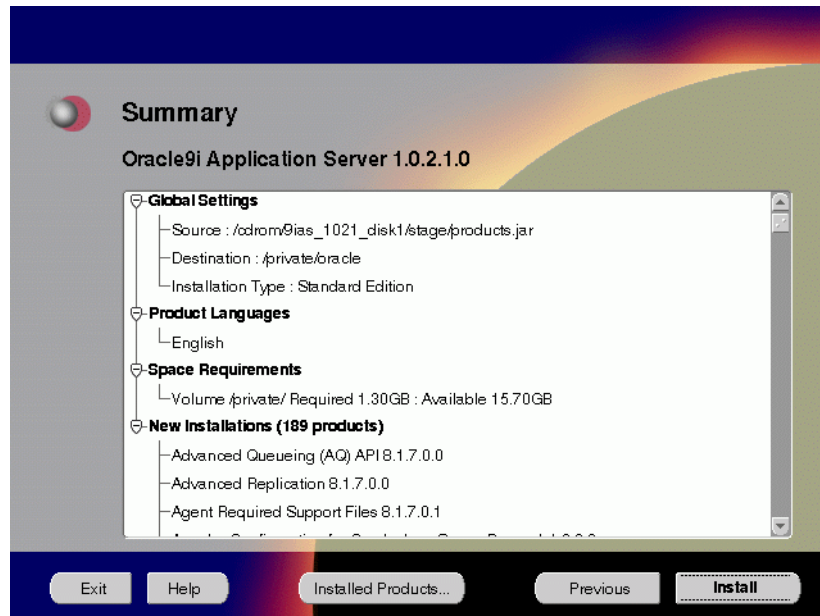

The Summary screen allows you to review all the settings before the actual installation process. These settings include source, destination, installation type, product language, space requirements, and a list of components.


- To make changes to any of these settings, click **Previous** to return to the respective screens.

Note: Insufficient disk space is indicated in red under **Space Requirements**.

When you click **Install**, the installation process begins.

18. Monitor the installation process and after the installer finishes, click **Next**.

Figure 4–18 *Install Screen*

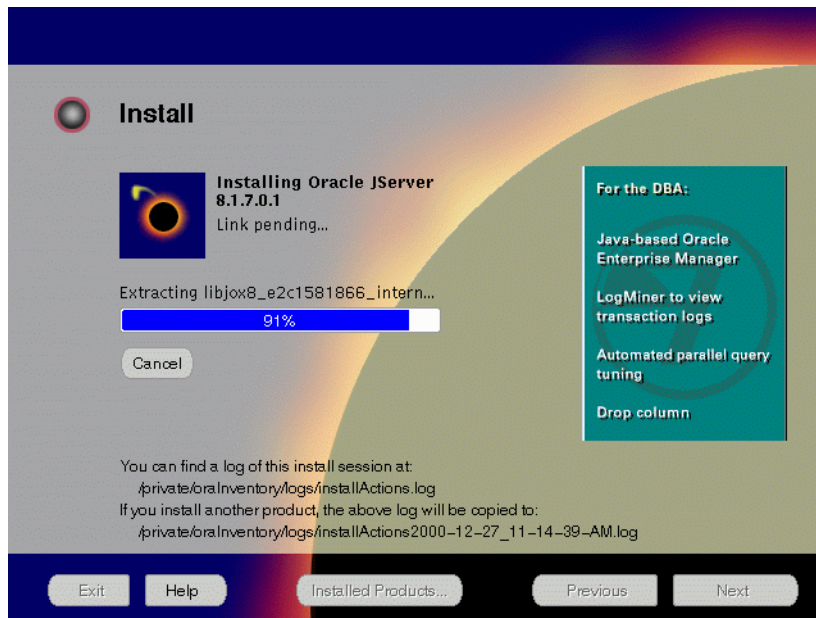

The Install screen appears while the product is installing. Installation operations include executing actions such as file copy and linking, and executing decision points and calculations. It also displays the full path of the installation log.

- **Cancel:** To discontinue the installation process. You can then choose to stop the installation of an individual component or the entire product.

For more information about installation log, refer to "[oraInventory Directory](#)" on page 2-27.

Changing Disks

During installation, the installer prompts you to switch between Disks 1, 2 and 3. Use these steps to change disks and continue the installation process.

Figure 4–19 Changing Disks Dialog



- a. Eject and unmount the current disk.

If you are using Solaris Volume Management software and Disk1 was automatically mounted, then this can be done with the following command:

```
prompt> eject cdrom
```

If you are not using Solaris Volume Management software, then you must manually eject and unmount the disk. For further instructions, refer to your operating system documentation

- b. Insert the next disk into the CD-ROM drive and mount it.

If you are using the Solaris Volume Management software, then the next disk will be automatically mounted.

If you are not using Solaris Volume Management software, then you must manually mount the disk. For further instructions, refer to ["Starting Oracle Universal Installer"](#) on page 2-28.

- c. Click the **Browse** button on the changing disks dialog, and navigate to /cdrom/9ias_1021_diskx. This directory may be different depending on where the original disk was mounted.
- d. Click OK to continue the installation process.

Running `root.sh`

After installation is completed, the installer prompts you to run `root.sh` script. Use these steps to run the `root.sh` script.

- a. Log on as the root user.
- b. Go to the Oracle home directory.

```
prompt> cd $ORACLE_HOME
```

- c. Run the `root.sh` script.

```
prompt> ./root.sh
```

- d. Exit root user.

Once you see “Finished running generic part of the `root.sh` script” and “Now product-specific root actions will be performed,” exit root user and return to the Install screen.


The `root.sh` script detects:

- Settings of `ORACLE_OWNER`, `ORACLE_HOME` and `ORACLE_SID` environment variables.
- Full path of local bin directory. You can accept the default or change to a different local bin directory.

19. Verify the list of configuration tools and click **Next**. This screen appears only if you select components to configure and start in the Components Configuration and Startup screen.

Note: The installer has completed copying and linking the necessary files. Be sure to start the database if it had been shut down for the installation process. The configuration tools such as Oracle9iAS Portal Configuration Assistant need to connect to an active database for configuration purposes.

Figure 4-20 Configuration Tools Screen

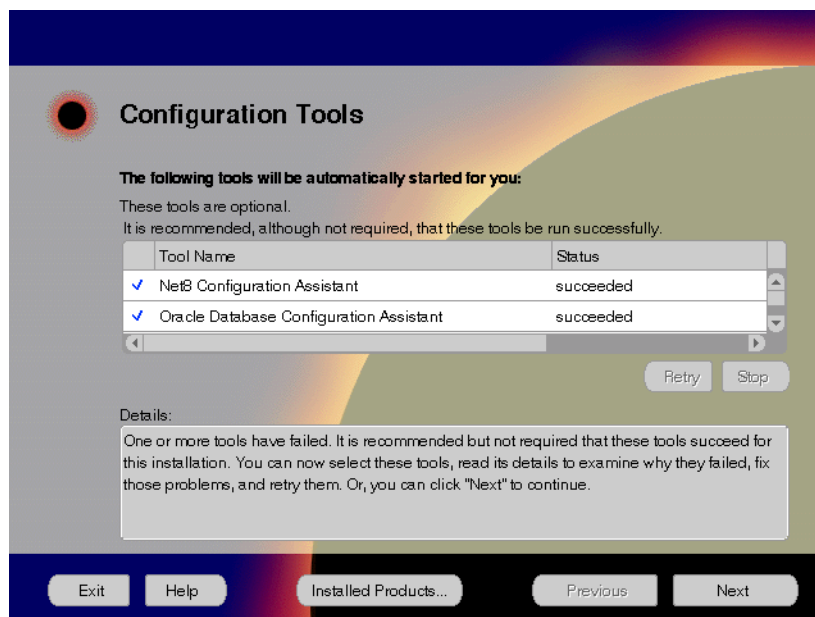

The Configuration Tools screen lists the configuration tools for all installed components.

Scroll down the list to review the configuration status of each tool. The status changes as each component is configured.

The installer performs the following functions in this screen:

- Executes a configuration tool for each component selected previously in the Component Configuration and Startup screen.
- Displays all the configuration settings in the display window below as it executes a configuration tool for each component.
- Enables you to view configuration settings after all configuration tools are executed. Click on each component to review all the changes made.
- Allows you to view data for failed executions in the display window. You can either fix the error and click **Retry** to execute the configuration tool again, or ignore the error and click **Next** to proceed to the next screen.
- **Retry:** To re-execute the configuration script if the configuration of a component fails.
- **Stop:** To quit the configuration process.

Configuration Tools

This installation option launches the following configuration tools:

Net8 Configuration Assistant - This configuration assistant enables you to connect and configure the Oracle client/server network environment.

See Also: *Net8 Administration's Guide* in the Oracle Database Documentation Library for information on running Net8 Configuration Assistant.

Oracle Database Configuration Assistant - This configuration assistant configures the database for Oracle Enterprise Java Engine. Oracle Database Configuration Assistant will not appear if you are migrating from Oracle9i Application Server 1.0.2.0 to 1.0.2.1.

See Also: "[Oracle Database Configuration Assistant](#)" on page A-17 for instructions on running Oracle Database Configuration Assistant.


Oracle9iAS Portal Configuration Assistant - This configuration assistant loads necessary database objects for Oracle9iAS Portal to run.

See Also: ["Oracle9iAS Portal Configuration Assistant"](#) on page A-8 for instructions on running Oracle9iAS Portal Configuration Assistant.

Starting Web Server in Non-SSL mode on port 7777 - This starts Oracle HTTP Server.

20. Ensure that the installation was successful. Click **Exit** to quit the installer.

Figure 4–21 *End of Installation Screen*

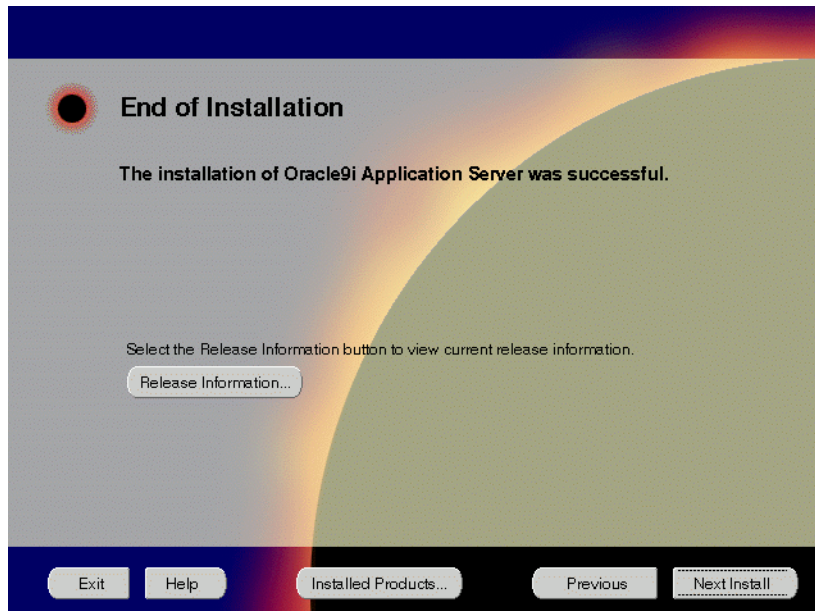

The End of Installation screen appears at the end of the installation process. It notifies you whether the installation was successful or unsuccessful.

- **Release Information:** To view the latest release information.

You have successfully installed the Standard Edition installation option of Oracle9i Application Server. Proceed to ["Postinstallation"](#) on page 4-33 to complete the installation process.

Postinstallation

The following instructions guide you through the basic postinstallation tasks for Oracle9i Application Server. Before performing these tasks, install, if needed, Oracle9iAS Wireless client from the Oracle9i Application Server Administrative and Development Client CD included in the Oracle9i Application Server CD pack.

See Also: [Appendix B, "Installing Oracle9i Application Server Administrative and Development Client CD-ROM"](#)

The postinstallation contains the following sections:

- [Environment Scripts](#)
- [Component-specific Tasks](#)
- [Starting and Stopping Components](#)
- [Component Web Sites](#)
- [Component Port Numbers](#)
- [Additional Documentation](#)

Environment Scripts

[Table 4–1](#) lists the environment script for Standard Edition installation option:

Table 4–1 *Environment Scripts*

Component	Environment Scripts
Oracle Internet File System	<code>ORACLE_HOME/ifs1.1/bin/infenv.sh</code> <code>ORACLE_HOME/ifs1.1/bin/ifsconfig</code>

Component-specific Tasks

Oracle Internet File System

You must run the Oracle Internet File System Configuration Assistant to configure Oracle Internet File System.

See Also: ["Oracle Internet File System Configuration Assistant"](#) for instructions on running Oracle Internet File System Configuration Assistant.

Starting and Stopping Components

Table 4–2 lists the commands needed to start and stop the components.

Table 4–2 Starting and Stopping Components

Component	Function	Command
Oracle9iAS Wireless Web Integration Server	Start	<code>ORACLE_HOME/panama/WebIntegration/Server/bin/server.sh</code>
	Stop	Go to <code>http://hostname.domainname:5555</code> and click on shutdown.
Oracle HTTP Server	Start	<code>ORACLE_HOME/Apache/Apache/bin/apachectl start</code>
	Stop	<code>ORACLE_HOME/Apache/Apache/bin/apachectl stop</code>
Oracle HTTP Server SSL-enabled	Start	<code>ORACLE_HOME/Apache/Apache/bin/apachectl startssl</code> (Log in as root user.)
	Stop	<code>ORACLE_HOME/Apache/Apache/bin/apachectl stopssl</code> (Log in as root user.)
Oracle Internet File System	Start	<code>ORACLE_HOME/ifs1.1/bin/ifsstart</code>
	Stop	<code>ORACLE_HOME/ifs1.1/bin/ifsstop</code>

Component Web Sites

[Table 4–3](#) lists Web sites for Oracle9i Application Server components.

Table 4–3 Component Web sites

Component	Web Site
Oracle9iAS Portal	<code>http://hostname.domain:7777/pls/portal30</code>
Oracle9iAS Wireless Web Integration Server	<code>http://hostname.domain:5555</code> (Log on as Administrator/manager.)
Oracle HTTP Server	<code>http://hostname.domain:7777</code>
Oracle HTTP Server (SSL-enabled)	<code>https://hostname.domain:80</code>
Oracle Internet File System	<code>http://hostname.domain:7777/ifs/files</code> (Log on as system/manager.)

Component Port Numbers

[Table 4–4](#) lists the default port numbers on which requests are received for each component.

Table 4–4 Port Numbers

Components	Port Number
Oracle9iAS Portal	Oracle9iAS Portal uses the same port number as Oracle HTTP Server
Oracle9iAS Wireless Oracle9iAS Wireless Web Integration Server	Oracle9iAS Wireless uses the same port as Oracle HTTP Server 5555
Oracle HTTP Server Oracle HTTP Server (SSL-enabled) Oracle HTTP Server Jserv Servlet Engine	7777 80 8007
Oracle Internet File System	Oracle Internet File System uses the same port number as Oracle HTTP Server FTP: 21 SMB: 139 SMTP: 2500 IMAP: 143 CUP: 4180
Oracle Enterprise Java Engine TNS Listener	TCP/IP: 1521 IIOP: 2481

Additional Documentation

For further information on postinstallation and configuration tasks, refer to component-specific documentation. For information on viewing and installing the documentation, refer to [Appendix E, "Installing Documentation Library"](#).

Enterprise Edition

This chapter guides you through the installation steps for the Enterprise Edition of Oracle9i Application Server. The following topics provide detailed installation steps, and basic postinstallation tasks:

- [Installation](#)
- [Postinstallation](#)

Installation

The following instructions guide you through the Enterprise Edition installation option of Oracle9i Application Server.

1. Review the Oracle Universal Installer Welcome screen and click **Next**.

Figure 5–1 Welcome Screen



The Welcome screen provides information about the Oracle Universal Installer.


The following function buttons appear on the installation screens.

- **Deinstall Products:** Deinstall individual components or the entire product. This button appears only on the Welcome screen.
- **About Oracle Universal Installer:** View the version number of the installer in use.
- **Exit:** Quit the installation process and exit the installer.
- **Help:** Access detailed information about the functionality of each screen.
- **Installed Products:** View currently installed products or to deinstall the entire product or components.

- **Previous:** Return to the previous screen.
- **Next:** Move to the next screen.

2. Verify the source and destination paths and click **Next**. If you have not previously installed Oracle products on your machine, the “OraInventory Location screen” appears after you click **Next**. Enter the complete location path for oraInventory directory and click **OK**.

Figure 5–2 File Locations Screen

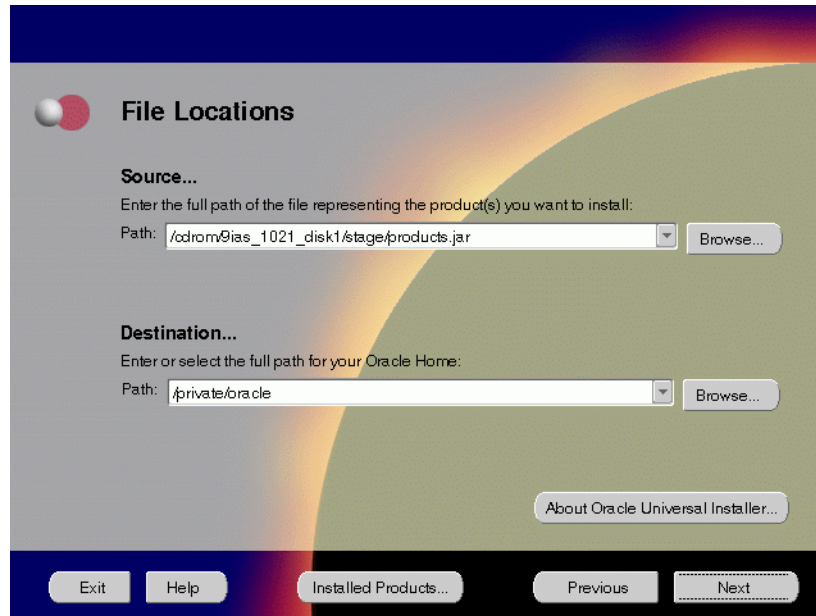

The File Locations screen allows you to enter the full path for the source and destination locations of Oracle9i Application Server.

- **Source:** This is the full path to the `products.jar` file from which the product will be installed. The installer detects and uses the default values of the `products.jar` file of the installation program. Do not change the path.
- **Destination:** This is the full path to the Oracle home where the product will be installed. The installer defaults to the Oracle home set in the preinstallation chapter.


Note: Oracle home path must be a real, absolute path. It cannot contain symbolic links, environment variables, or spaces.

For more information regarding Oracle home, refer to "[ORACLE_HOME](#)" on page 2-8.

- **Browse:** To navigate through the file system to find source and destination locations.

3. Enter a UNIX group name and click **Next**. This screen appears only the first time you run Oracle Universal Installer on your machine.

Figure 5–3 UNIX Group Name Screen

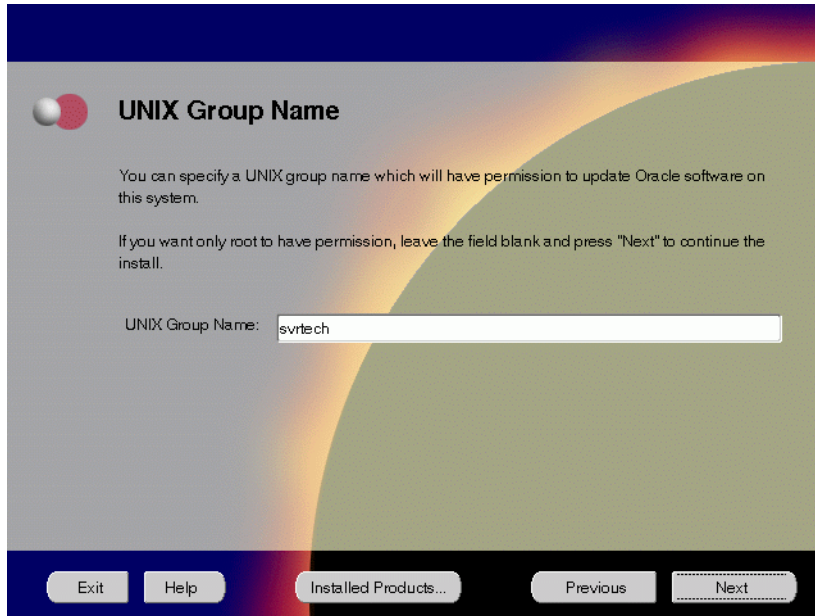

The UNIX Group Name screen grants permission for the `oraInventory` directory to the group specified. For more information, refer to ["UNIX Group Name for the Oracle Universal Installer Inventory"](#) on page 2-11.

UNIX Group Name:

- Enter a UNIX group name for those who have permission to configure all the functionality of Oracle9i Application Server. Verify your group name by entering this command from the UNIX prompt the installer was launched from:


```
prompt> id
```
- Run the `orainstRoot.sh` script from your Oracle home to grant permissions to the root user only. You must have root privileges to run this script. The script creates pointers to the components as the installer installs them in the system so that they can be identified later in the installation

procedure. It produces the `/var/opt/oracle/oraInst.loc` file, which provides a pointer to the `oraInventory` directory.

After you have run the script, click **Retry** to continue.

4. Select Enterprise Edition and click **Next**.

Figure 5–4 *Installation Types Screen*

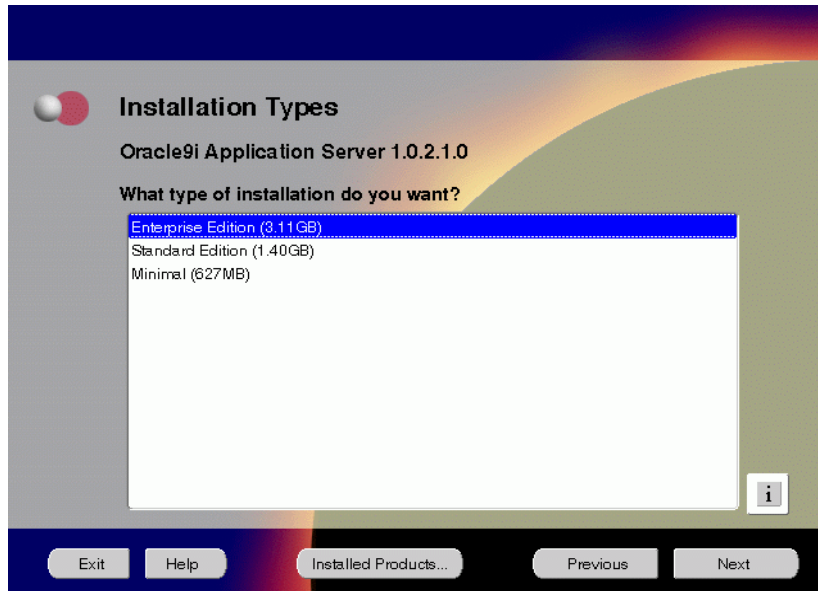

The Installation Types screen allows you to select the Oracle*9i* Application Server installation option that you are licensed to use.


See Also: [Table 2–1, "Oracle9i Application Server Components"](#) on page 2-2 for a complete list of components.

- **Enterprise Edition:** Installs Oracle*9iAS* Database Cache, Oracle*9iAS* Discoverer, Oracle*9iAS* Forms Services, Oracle*9iAS* Portal, Oracle*9iAS* Reports Services, Oracle*9iAS* Web Cache, Oracle*9iAS* Wireless, Oracle Enterprise Java Engine, Oracle Enterprise Manager Client, Oracle HTTP Server, Oracle Internet File System, and Oracle Management Server.
- **Standard Edition:** Installs Oracle*9iAS* Portal, Oracle*9iAS* Wireless, Oracle Enterprise Java Engine, Oracle Enterprise Manager Client, Oracle HTTP Server, and Oracle Internet File System.
- **Minimal Edition:** Installs Oracle*9iAS* Portal, Oracle*9iAS* Wireless, Oracle Enterprise Manager Client, and Oracle HTTP Server.

5. If needed, verify and change the locations of the components displayed on the screen, and click **Next**.

This screen appears only if Oracle Universal Installer has detected insufficient disk space in the Oracle home directory.

Figure 5–5 Component Locations Screen

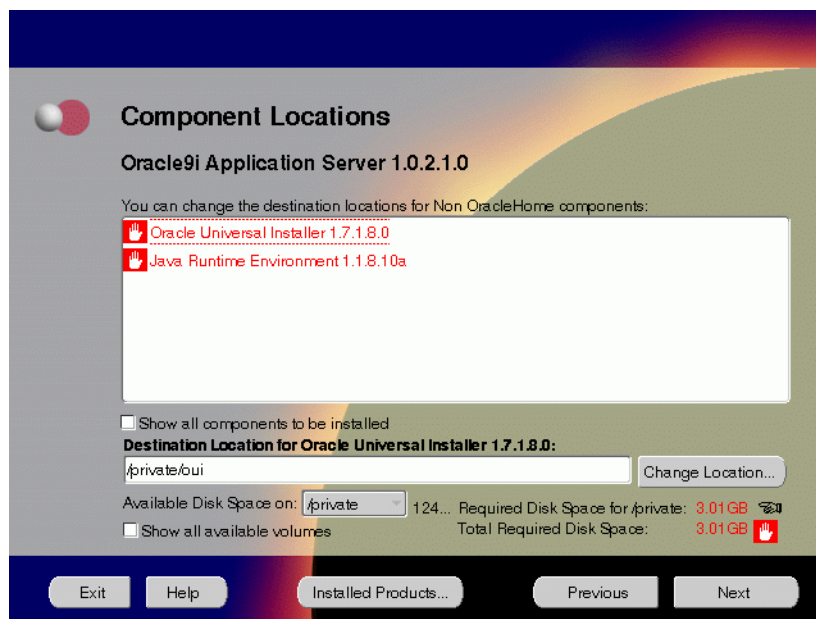

The Component Locations screen allows you to select alternative locations for some components.

Show all components to be installed: To view the complete list of components chosen for installation. Select check box to display component list.

Click individual components to view and change destination location path. The installer enables you to change the destination location of the components displayed on the screen.

- **Destination Location:** To view the full path of the selected component.
- **Change Location:** To browse for alternate locations for the selected component.
- **Available Disk Space:** To view available disk space in the current directory. The installer also provides information about the total disk space required for the installation of additional components.
- **Required Disk Space for *directory_name*:** To view the total disk space required for installation in the selected directory.
- **Total Required Disk Space:** To view the total disk space required for the product to be installed.
- **Show all available volumes:** To browse through file system for available disk space. Select check box to display the file system.

Note: Insufficient disk space is indicated in red with a hand icon next to it.

6. Remove unneeded files from the swap directory to provide sufficient space for installation and click **Next**. If your swap space is smaller than 500 MB, click **Exit** and correct the problem.

Figure 5–6 *Insufficient Space in TMP Screen*




The Insufficient Space in TMP screen indicated inadequate space in the swap directory. You have two options:

- If you have more than 500 MB swap space, then remove unneeded files from your swap space to create room for installation and click **Next** to proceed.
- If you have less than 500 MB swap space, then **Exit** the installer and set TMP environment variable to point to a writable directory with sufficient space.

For detailed information on TMP directory, refer to "[TMP](#)" on page 2-10.

7. Click the help button to verify that all the preinstallation tasks have been performed, and then click **Next**.


Figure 5–7 *Installation Overview Screen*

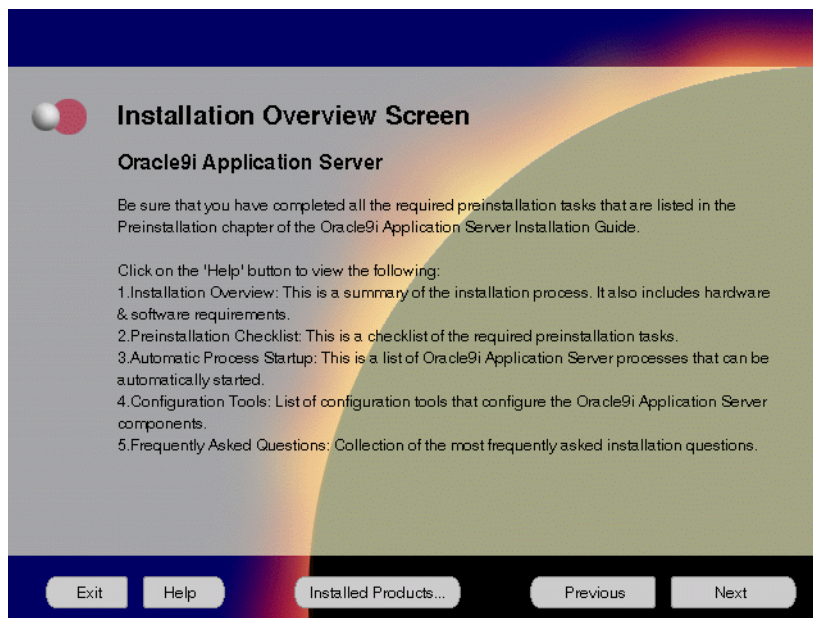

The Installation Overview screen gives you an overview of the installation process. Click on the **Help** button for information on the installation process, preinstallation checklist, automatic process startup, configuration tools, and frequently asked questions.

8. Select the components for configuration and startup after installation and click **Next**.

Figure 5–8 Component Configuration and Startup Screen

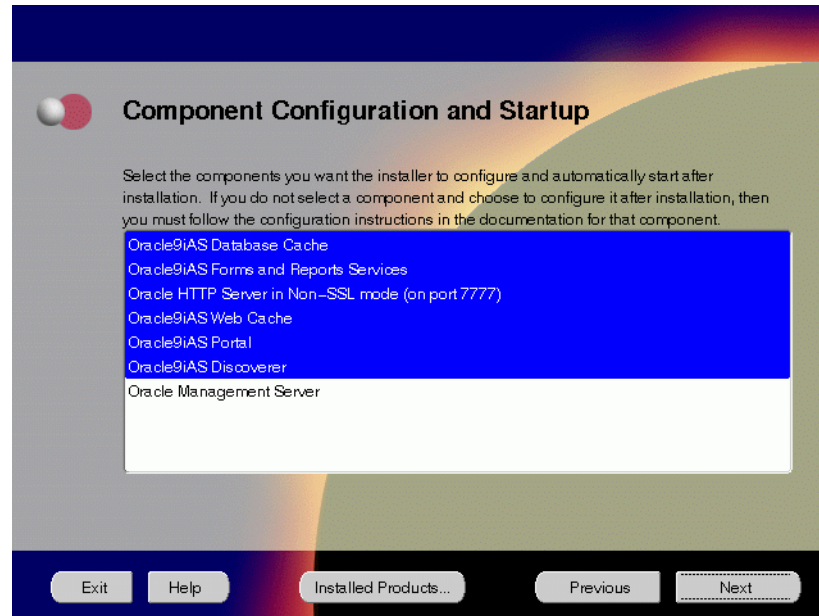

The Component Configuration and Startup screen allows you to select the components that you want the installer to configure and start after installation. This screen offers two configuration options:


- If you select a component here, then the installer prompts you for any or all configuration information required by that component. After installation, the installer starts that component.
- If you de-select a component here, then the installer installs it, but does not configure or start it. After installation, if you decide to use that component, then manually launch the configuration assistant to configure that component.

See Also: [Appendix A, "Configuration Tools"](#)

You can select or de-select multiple components by holding down the Control key while clicking on the component name.

9. Enter the host name, port number, and service name of the origin database and click **Next**. This screen will appear only if you selected Oracle9iAS Database Cache in the Component Configuration and Startup screen.

Figure 5–9 *Origin Database Connection Information*

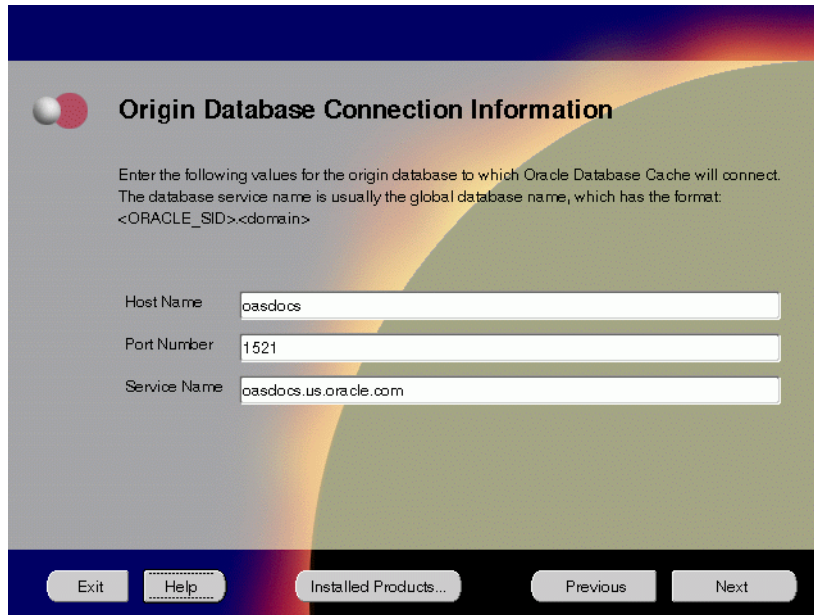The image shows a software installation window titled "Origin Database Connection Information". It features a blue header bar with a red and white circular icon on the left. Below the title, there is a paragraph of instructions: "Enter the following values for the origin database to which Oracle Database Cache will connect. The database service name is usually the global database name, which has the format: <ORACLE_SID>.<domain>". Below this text are three input fields: "Host Name" with the value "oasdocs", "Port Number" with the value "1521", and "Service Name" with the value "oasdocs.us.oracle.com". At the bottom of the window, there is a dark blue bar containing five buttons: "Exit", "Help", "Installed Products...", "Previous", and "Next".

Origin Database Connection Information

Enter the following values for the origin database to which Oracle Database Cache will connect. The database service name is usually the global database name, which has the format: <ORACLE_SID>.<domain>

Host Name: oasdocs

Port Number: 1521

Service Name: oasdocs.us.oracle.com

Exit Help Installed Products... Previous Next

The Origin Database Connection Information screen enables you to identify the origin database for the middle-tier cache.

- **Host Name:** The name of the machine where the origin database is located.
- **Port Number:** The port number of the listener for the origin database. The default port number is 1521.
- **Service Name:** The database service name is the global database name. The global database name uniquely distinguishes the database from other databases in your network domain. The installation procedure uses this name to create an entry in the `tnsnames.ora` file on the local cache node.

For example, if `oasdocs` is the database name and `us.oracle.com` is the network domain in which the database is located, then the service name is `oasdocs.us.oracle.com`.

10. Enter or accept the default Portal DAD and Schema names. Also, enter the TNS Connect String, if necessary. Click **Next**. This screen will appear only if you selected Oracle9iAS Portal in the Component Configuration and Startup screen.

Figure 5–10 Apache Listener Configuration for Oracle Portal (DAD and Schema name) Screen

Apache Listener Configuration for Oracle Portal

Database Access Descriptor (DAD) for Oracle Portal

Enter a name for the DAD that will be used to access Oracle Portal and enter the name of the database schema where Oracle Portal will be installed. If you are installing the Oracle HTTP Server powered by Apache in an Oracle Home other than the one in which Oracle Portal is installed, you must also specify a TNS connect string to the database where Oracle Portal is installed.

Portal DAD Name:

Portal Schema Name:

TNS Connect String:

Note: The TNS connect string must be specified in the tnsnames.ora which must be located in the Oracle Home where you are installing the Oracle HTTP Server.

Exit Help Installed Products... Previous **Next**

The Apache Listener Configuration for Oracle Portal DAD screen allows you to enter the name of the Database Access Descriptor (DAD) that will be used to access Oracle Portal, and the name of the database schema where Oracle Portal will be installed. It also enables you to enter the TNS connect string if Oracle Portal and Oracle HTTP Server are installed in different Oracle homes. The information you enter here is used to create the PL/SQL Gateway settings which you can access upon installation from the following location:

`http://machine_name:port/pls/admin_/gateway.htm`

- **Portal DAD Name:** Enter the name of the DAD for each instance you installed in the database. A Database Access Descriptor (DAD) is a set of values that specify how the Apache Listener connects to your Oracle database server to fulfill an HTTP request. Based on this DAD name, the installation automatically sets other DAD-related and default settings such

as the name and location of the document table. The default DAD name is `portal30`.

- **Portal Schema Name:** Enter the name of the database schema that will contain Oracle Portal. A schema is a collection of components and database objects under the control of a given database user. Each Oracle Portal application maps to an Oracle database schema. The default schema name is `portal30`.
- **TNS Connect String:** Enter the TNS connect string or TNS alias that you will use to connect to the remote Oracle database after installation. It enables you to install the Portal database objects into a remote database. Since you are installing in a new Oracle home, you will need to enter a TNS connect string before it is actually created. The Net8 Assistant will appear later in the installation process to guide you in the configuration of a new TNS alias. Be sure to note the name of the TNS connect string you enter here, so that you will use the same name when the Net8 Assistant appears later.

11. Enter or accept the default Login Server DAD and Schema names. Also, enter the TNS Connect String, if necessary. Click **Next**. This screen will appear only if you selected Oracle9iAS Portal in the Component Configuration and Startup screen.

Figure 5–11 *Apache Listener Configuration for Oracle Portal (Login Server) Screen*

Apache Listener Configuration for Oracle Portal

Database Access Descriptor (DAD) for the Login Server

Enter a name for the DAD that will be used to access the Login Server and enter the name of the database schema where the Login Server will be installed. If you are installing the Oracle HTTP Server powered by Apache in an Oracle Home other than the one in which the Login Server is installed, you must also specify a TNS connect string to the database where the Login Server is installed.

Login Server DAD Name:

Login Server Schema Name:

TNS Connect String:

You can create additional DADs to access other Oracle Portal installations by entering this URL in your browser: `http://<machine_name>:<port>/pls/admin_gateway.htm`

Exit Help Installed Products... Previous **Next**


The Apache Listener Configuration for Oracle Portal screen allows you to enter the Login Server DAD and Schema Name, with a `_sso` extension for easy recognition. The Login Server provides an enterprise-wide Single Sign-On (SSO) mechanism that enables an Oracle Portal user to log in securely to Oracle Portal and any partner and external applications using a single user name and password. It also enables you to enter the TNS Connect String if Oracle Portal and Oracle HTTP Server are installed in different Oracle homes.

- **Login Server DAD Name:** Enter the name of the DAD for each instance you installed in the database. The default DAD name is `portal30_sso`.
- **Login Server Schema Name:** Enter the name of the database schema that will contain Oracle Portal. The default schema name is `portal30_sso`.
- **TNS Connect String:** Enter the TNS connect string or TNS alias that you have defined for the remote Oracle database.

For more information on these fields, refer to the previous screen.

12. Enter the `SYSDBA` name and password and click **Next**. This screen will appear only if you have selected Oracle9iAS Database Cache in the Component Configuration and Startup screen.

Figure 5–12 *Origin Database User Information Screen*

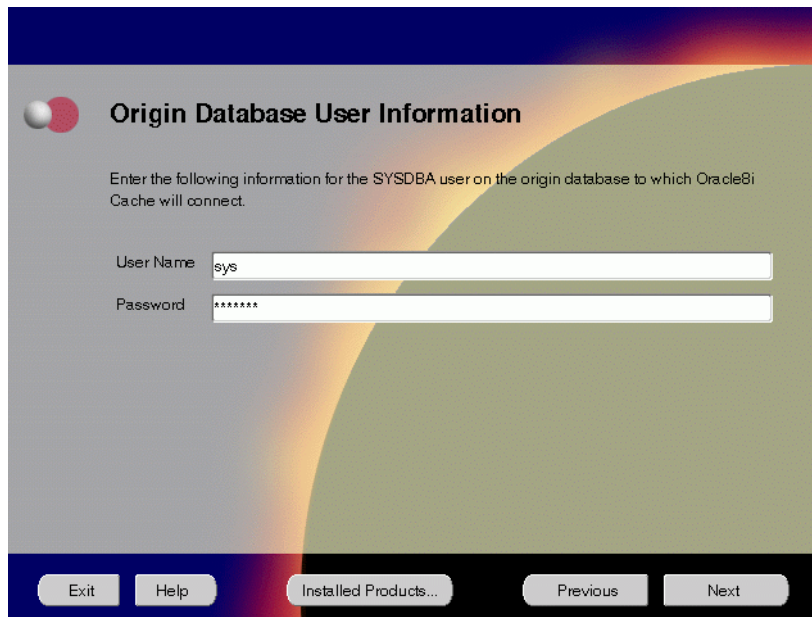
The image shows a software installation window titled "Origin Database User Information". The window has a dark blue header bar. Below the header, there is a small icon of two overlapping circles (one red, one white) followed by the title "Origin Database User Information". The main area has a light gray background with a large, stylized orange and yellow curved graphic on the right side. The text "Enter the following information for the SYSDBA user on the origin database to which Oracle8i Cache will connect." is displayed. Below this, there are two input fields: "User Name" with the text "sys" and "Password" with masked characters "*****". At the bottom, there is a dark blue bar containing five buttons: "Exit", "Help", "Installed Products...", "Previous", and "Next".

The Origin Database User Information screen allows you to enter the SYSDBA information created for the origin database.

- **User Name:** The `SYSDBA` user name for the origin database that the installer detects and defaults. You can change the name or accept the default.
- **Password:** The password for the `SYSDBA` user.

13. Enter the new username and password for the database user to store the Oracle9iAS Wireless repository, and click **Next**. If you are upgrading from Oracle9i Application Server, Release 1.0.2, then an “Upgrade Installation Detected” screen will appear. Review the content on the screen and click **Next** or **Exit** accordingly. If you click **Next**, then the installation will continue and the following screen will appear.

Figure 5–13 *Wireless Edition Repository Information Screen*

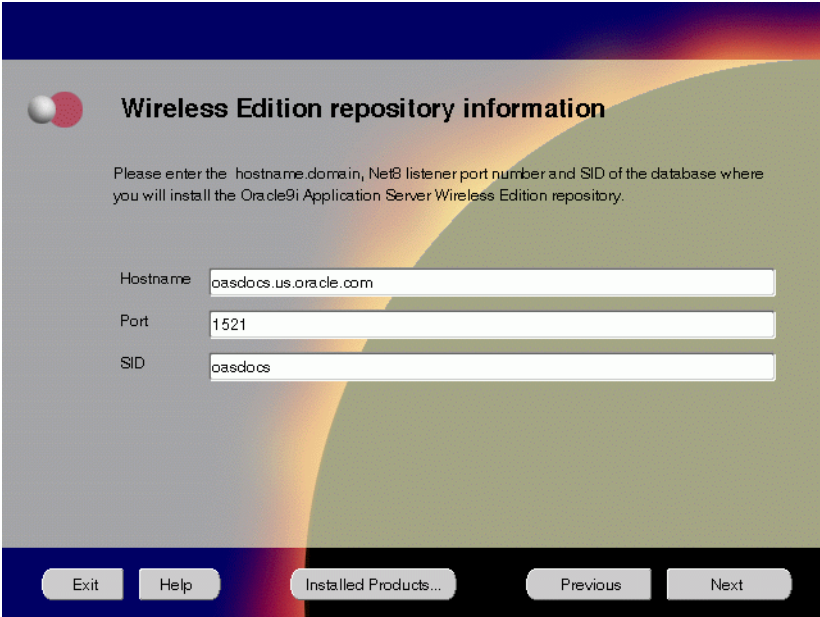The screenshot shows a software installation window titled "Wireless Edition repository information". It features a header with a small icon and the title. Below the title is a paragraph of instructions: "Please enter the hostname, domain, Net8 listener port number and SID of the database where you will install the Oracle9i Application Server Wireless Edition repository." There are three input fields: "Hostname" with the value "oasdocs.us.oracle.com", "Port" with the value "1521", and "SID" with the value "oasdocs". At the bottom of the window, there is a navigation bar with five buttons: "Exit", "Help", "Installed Products...", "Previous", and "Next".

Wireless Edition repository information

Please enter the hostname, domain, Net8 listener port number and SID of the database where you will install the Oracle9i Application Server Wireless Edition repository.

Hostname: oasdocs.us.oracle.com

Port: 1521

SID: oasdocs

Exit Help Installed Products... Previous Next

The Wireless Edition Repository Information screen allows you to enter the hostname, Net8 Listener port number, and SID of the database where you will install the Oracle9iAS Wireless repository.


Note: Do not install Oracle9iAS Wireless on Oracle9iAS Database Cache.

- **Hostname:** Enter the `hostname.domain` of the database where you will install the Oracle9iAS Wireless.
- **Port:** Enter the Net8 Listener port number.

- **SID:** Enter the System Identifier (SID) of the database where you will install the Oracle9iAS Wireless repository.

14. Enter the new username and password for the database user to store the Oracle9iAS Wireless repository, and click **Next**. If you are upgrading from Oracle9i Application Server, Release 1.0.2, then the “Oracle9iAS Wireless Schema Information Screen” will be slightly different. Enter the existing Oracle9iAS Wireless username and password, and click **Next**.

Figure 5–14 *Wireless Edition Schema Information Screen*

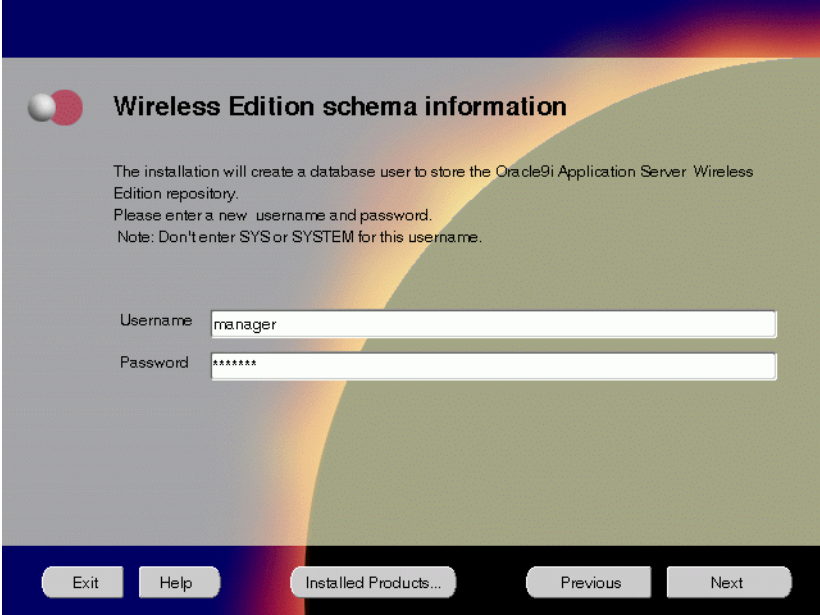The image shows a screenshot of the "Wireless Edition schema information" screen. At the top, there is a title bar with a small icon and the text "Wireless Edition schema information". Below the title, there is a paragraph of text: "The installation will create a database user to store the Oracle9i Application Server Wireless Edition repository. Please enter a new username and password. Note: Don't enter SYS or SYSTEM for this username." Below this text, there are two input fields: "Username" with the value "manager" and "Password" with the value "*****". At the bottom of the screen, there is a navigation bar with five buttons: "Exit", "Help", "Installed Products...", "Previous", and "Next".

The Wireless Edition Schema Information screen allows you to create a database user to store the Oracle9iAS Wireless repository.

- **Username:** Enter a new user name for the database user to store the Oracle9iAS Wireless repository.
- **Password:** Enter a password for the database user.

Note: Do not use an existing database user, (that is, SYS or SYSTEM) as the username.

15. Enter and confirm the `SYSTEM` password of the database, and click **Next**. If you are upgrading from Oracle9i Application Server, Release 1.0.2, then a “Wireless Edition Administrator Password Information” screen appears. Enter and confirm the “Administrator” password, and click **Next**.

Note: Do not enter the database schema owner password.

Figure 5–15 System Password for Wireless Edition Screen




The System Password screen allows you to enter and confirm the `SYSTEM` password of the database where you are loading the Oracle9iAS Wireless repository.

- **Enter Password:** Enter the `SYSTEM` password of the database where you will install the Oracle9iAS Wireless.
- **Confirm Password:** Re-enter the `SYSTEM` password as entered above for verification.

16. Review the summary and click **Install** to begin the installation process.

Figure 5–16 Summary Screen

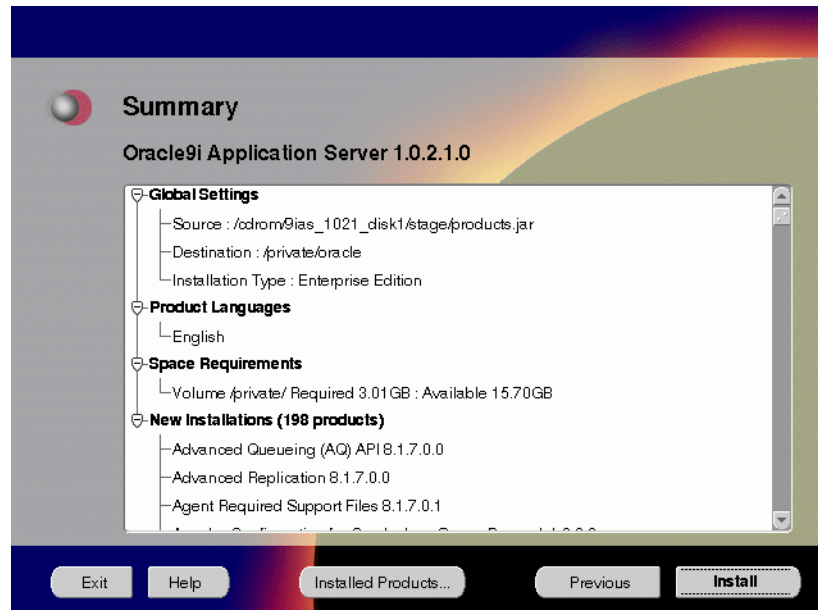

The Summary screen allows you to review all the settings before the actual installation process. These settings include source, destination, installation type, product language, space requirements, and a list of components.


- To make changes to any of these settings, click **Previous** to return to the respective screens.

Note: Insufficient disk space is indicated in red under **Space Requirements**.

When you click **Install**, the installation process begins.

17. Monitor the installation process and after the installer finishes, click **Next**.

Figure 5-17 *Install Screen*

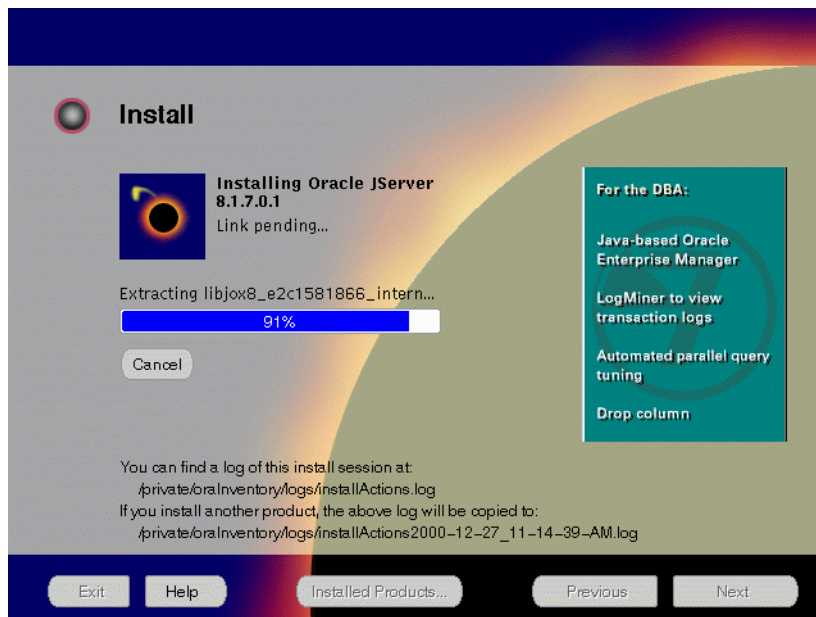

The Install screen appears while the product is installing. Installation operations include executing actions such as file copy and linking, and executing decision points and calculations. It also displays the full path of the installation log.

- **Cancel:** To discontinue the installation process. You can then choose to stop the installation of an individual component or the entire product.


For more information about installation log, refer to "[oraInventory Directory](#)" on page 2-27.

Oracle9iAS Discoverer Installation

After the installer finishes installing the files, the Oracle Installer appears and installs Oracle9iAS Discoverer. Oracle9iAS Discoverer installation does not require any user input.

You will get the following screen indicating that Oracle9iAS Discoverer is being installed:

Figure 5–18 Oracle9iAS Discoverer Installation Screen

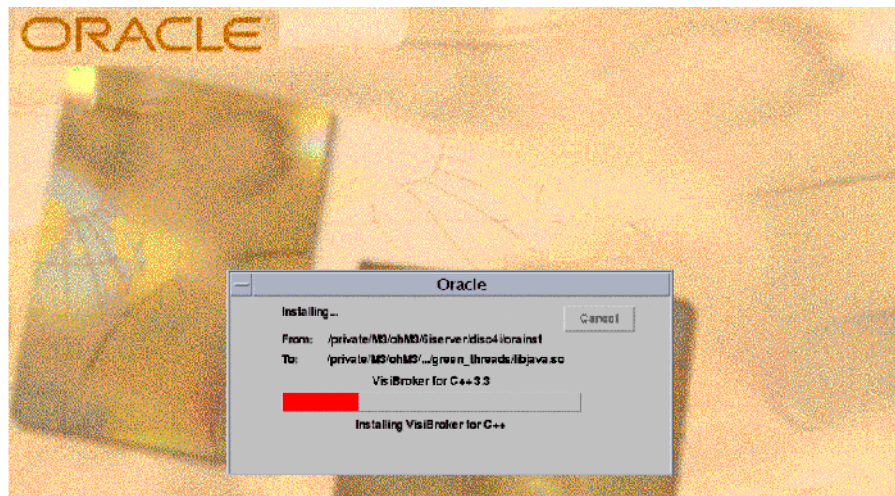

Changing Disks

During installation, the installer prompts you to switch between Disks 1, 2 and 3. Use these steps to change disks and continue the installation process.

Figure 5–19 Changing Disks Dialog



- a. Eject and unmount the current disk.

If you are using Solaris Volume Management software and Disk1 was automatically mounted, then this can be done with the following command:

```
prompt> eject cdrom
```

If you are not using Solaris Volume Management software, then you must manually eject and unmount the disk. For further instructions, refer to your operating system documentation

- b. Insert the next disk into the CD-ROM drive and mount it.

If you are using the Solaris Volume Management software, then the next disk will be automatically mounted.

If you are not using Solaris Volume Management software, then you must manually mount the disk. For further instructions, refer to ["Starting Oracle Universal Installer"](#) on page 2-28.

- c. Click the **Browse** button on the changing disks dialog, and navigate to /cdrom/9ias_1021_diskx. This directory may be different depending on where the original disk was mounted.
- d. Click OK to continue the installation process.

Running `root.sh`

After installation is completed, the installer prompts you to run `root.sh` script. Use these steps to run the `root.sh` script.

- a. Log on as the root user.
- b. Go to the Oracle home directory.

```
prompt> cd $ORACLE_HOME
```

- c. Run the `root.sh` script.

```
prompt> ./root.sh
```

- d. Exit root user.

Once you see “Finished running generic part of the `root.sh` script” and “Now product-specific root actions will be performed,” exit root user and return to the Install screen.


The `root.sh` script detects:

- Settings of `ORACLE_OWNER`, `ORACLE_HOME` and `ORACLE_SID` environment variables.
- Full path of local bin directory. You can accept the default or change to a different local bin directory.

- 18. Verify the list of configuration tools and click **Next**. This screen appears only if you select components to configure and start in the Components Configuration and Startup screen.

Note: The installer has completed copying and linking the necessary files. Be sure to start the database if it had been shut down for the installation process. The configuration tools such as Oracle9iAS Portal Configuration Assistant need to connect to an active database for configuration purposes.

Figure 5-20 Configuration Tools Screen

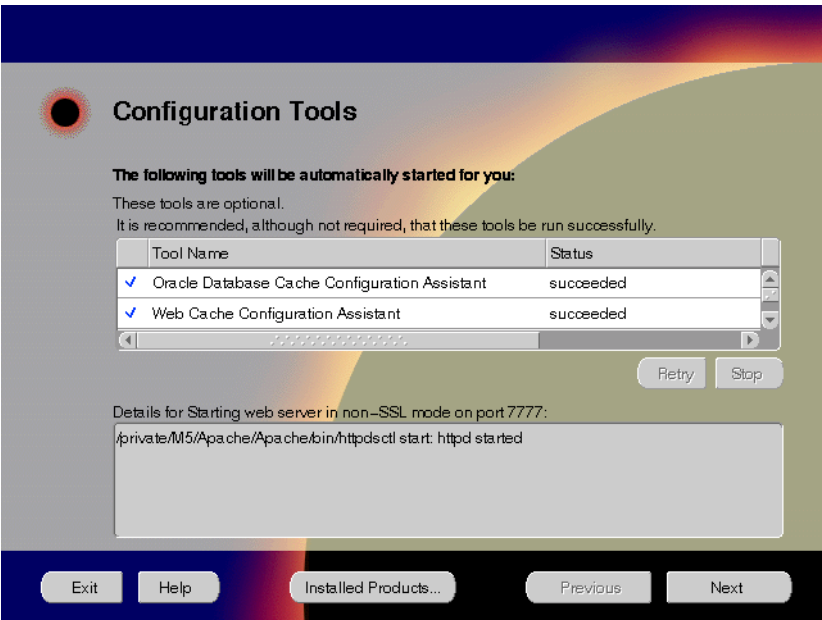

The Configuration Tools screen lists the configuration tools for all installed components.

Scroll down the list to review the configuration status of each tool. The status changes as each component is configured.

The installer performs the following functions in this screen:

- Executes a configuration tool for each component selected previously in the Component Configuration and Startup screen.
- Displays all the configuration settings in the display window below as it executes a configuration tool for each component.
- Enables you to view configuration settings after all configuration tools are executed. Click on each component to review all the changes made.
- Allows you to view data for failed executions in the display window. You can either fix the error and click **Retry** to execute the configuration tool again, or ignore the error and click **Next** to proceed to the next screen.
- **Retry**: To re-execute the configuration script if the configuration of a component fails.
- **Stop**: To quit the configuration process.

Configuration Tools

Depending on the components you select in the Configuration and Startup screen, the following configuration tools launch:

Oracle9iAS Database Cache Configuration Assistant - This configuration assistant enables you to configure your middle-tier caches. Oracle9iAS Database Cache Configuration Assistant will not appear if you are migrating from Oracle9i Application Server 1.0.2.0 to 1.0.2.1.

See Also: ["Oracle9iAS Database Cache Configuration Assistant"](#) on page A-3 for instructions on running Oracle9iAS Database Cache Configuration Assistant.

Oracle9iAS Web Cache Configuration Assistant - This launches the service to start Oracle9iAS Web Cache. Oracle9iAS Web Cache service starts up automatically by default. If you choose not to use Oracle9iAS Web Cache, you will need to stop the service manually.

See Also: ["Starting and Stopping Components"](#) on page 5-42

Oracle9iAS Portal Configuration Assistant - This configuration assistant loads necessary database objects for Oracle9iAS Portal to run.

See Also: ["Oracle9iAS Portal Configuration Assistant"](#) on page A-8 for instructions on running Oracle9iAS Portal Configuration Assistant.

Starting Web Server in Non-SSL mode on port 7777 - This starts Oracle HTTP Server.


Starting Forms Server: This starts the Oracle9iAS Forms Services.

Starting Reports Server: This starts the Oracle9iAS Reports Services.

Starting Discoverer 4i Viewer Server: This starts the Oracle9iAS Discoverer Services.

19. Ensure that the installation was successful. Click **Exit** to quit the installer.

Figure 5-21 *End of Installation Screen*

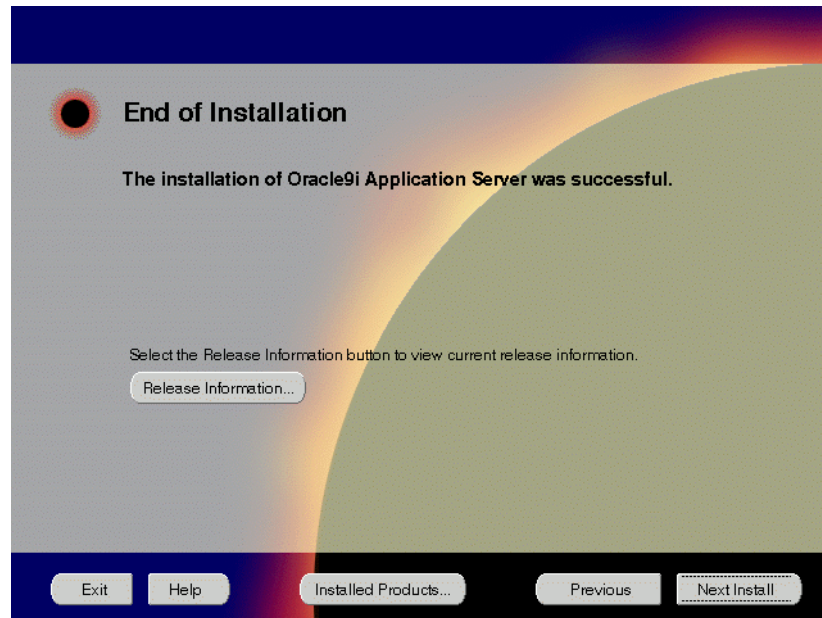

The End of Installation screen appears at the end of the installation process. It notifies you whether the installation was successful or unsuccessful.

- **Release Information:** To view the latest release information.

You have successfully installed the Enterprise Edition installation option of Oracle9i Application Server. Proceed to ["Postinstallation"](#) on page 5-32 to complete the installation process.

Postinstallation

The following instructions guide you through the basic postinstallation tasks for Oracle9i Application Server. Before performing these tasks, install, if needed, Oracle9iAS Wireless client from the Oracle9i Application Server Administrative and Development Client CD included in the Oracle9i Application Server CD pack.

See Also: [Appendix B, "Installing Oracle9i Application Server Administrative and Development Client CD-ROM"](#)

The postinstallation contains the following sections:

- [Environment Scripts](#)
- [Component-specific Tasks](#)
- [Starting and Stopping Components](#)
- [Component Web Sites](#)
- [Component Port Numbers](#)
- [Additional Documentation](#)

Environment Scripts

[Table 5–1](#) and [Table 5–2](#) list the environment script for Enterprise Edition installation option:

Table 5–1 Environment Scripts for C Shell Users

Component	C Shell
Oracle9iAS Database Cache	<code>ORACLE_HOME/8ienv.csh</code>
Oracle9iAS Discoverer	<code>ORACLE_HOME/6iserver/discwb4/discwb.csh</code>
Oracle9iAS Forms Services	<code>ORACLE_HOME/6iserver/forms60.csh</code>
Oracle9iAS Reports Services	<code>ORACLE_HOME/6iserver/reports60.csh</code>
Oracle9iAS Web Cache	<code>ORACLE_HOME/8ienv.csh</code>
Oracle Internet File System	Using the Bourne or Korn shell, run the following scripts: <code>ORACLE_HOME/ifs1.1/bin/infenv.sh</code> <code>ORACLE_HOME/ifs1.1/bin/ifsconfig</code>
Oracle Management Server	<code>ORACLE_HOME/8ienv.csh</code>

Table 5–2 Environment Scripts for Bourne or Korn Shell Users

Component	Bourne/Korn Shell
Oracle9iAS Database Cache	<code>ORACLE_HOME/8ienv.sh</code>
Oracle9iAS Discoverer	<code>ORACLE_HOME/6iserver/discwb4/discwb.sh</code>
Oracle9iAS Forms Services	<code>ORACLE_HOME/6iserver/forms60.sh</code>
Oracle9iAS Reports Services	<code>ORACLE_HOME/6iserver/reports60.sh</code>
Oracle9iAS Web Cache	<code>ORACLE_HOME/8ienv.sh</code>
Oracle Internet File System	<code>ORACLE_HOME/ifs1.1/bin/infenv.sh</code> <code>ORACLE_HOME/ifs1.1/bin/ifsconfig</code>
Oracle Management Server	<code>ORACLE_HOME/8ienv.sh</code>

Component-specific Tasks

This section contains postinstallation tasks for the following topics:

- [Oracle Internet File System](#)
- [Oracle Management Server](#)
- [Oracle9iAS Database Cache](#)
- [SSL Authentication Method Configuration](#)
- [Multi-threaded Server Configuration](#)

Oracle Internet File System

You must run the Oracle Internet File System Configuration Assistant to configure Oracle Internet File System.

See Also: ["Oracle Internet File System Configuration Assistant"](#)
for instructions on running Oracle Internet File System
Configuration Assistant.

Oracle Management Server

You must run the Oracle Enterprise Manager Configuration Assistant to configure Oracle Management Server.

See Also: ["Oracle Management Server Configuration Assistant"](#)
for instructions on running Oracle Enterprise Manager
Configuration Assistant.

Oracle9iAS Database Cache

Be sure to perform the following post-installation steps to Oracle9iAS Database Cache

- [Setting Up the Oracle9iAS Database Cache Environment for Your Applications](#)
- [Using the Oracle9iAS Database Cache Home](#)
- [Using a Previous Oracle8i Release 8.1.6 Oracle Home](#)
- [Relinking Applications That Use Releases Previous to Release 8.1.6](#)
- [Modify the initcache.ora File](#)

Setting Up the Oracle9iAS Database Cache Environment for Your Applications

When you install Oracle9iAS Database Cache, the installation procedure installs files that are specific to Oracle9iAS Database Cache and files that are updates to Oracle8i Server or Client release 8.1.6.1. These files contain the Oracle9iAS Database Cache functionality, as well as bug fixes to files usually installed with the Oracle8i Server or Client.

To use Oracle9iAS Database Cache, you must make sure that your applications are using the files and libraries installed for Oracle9iAS Database Cache. You can do this in the following ways:

- Run your application from the Oracle home in which you installed Oracle9iAS Database Cache. This is the supported method. See ["Using the Oracle9iAS Database Cache Home"](#) for a description of the steps you must take.
- If you have multiple Oracle homes and you need to run your application from the Oracle home for Oracle8i Server or Client release 8.1.6 or 8.1.6.1, you must copy files from the Oracle9iAS Database Cache Oracle home to the Oracle8i Server or Client Oracle home. See ["Using a Previous Oracle8i Release 8.1.6 Oracle Home"](#) on page 5-37 for a description of the steps you must take.
- If your application was compiled and linked using a release prior to Oracle8i Server or Client release 8.1.6, you must relink your application using the OCI libraries that are installed by Oracle9iAS Database Cache. See ["Relinking Applications That Use Releases Previous to Release 8.1.6"](#) on page 5-38 for more information.

Using the Oracle9iAS Database Cache Home

To run your application from the Oracle home in which you installed Oracle9iAS Database Cache, you must take the following steps:

1. From the process in which you will run your application, set the following environment variables:
 - Set Oracle home to the Oracle home in which you have installed Oracle9iAS Database Cache.
 - Set `LD_LIBRARY_PATH` so that the Oracle9iAS Database Cache library directory (`ORACLE_HOME/lib`) precedes library directories from other Oracle homes.
 - Set `ORA_OCI_CACHE` to “1” so that all applications started from the process will use the cache. (Alternatively, you can use parameters within OCI applications to control which applications or statements use the cache. See the *Oracle9iAS Database Cache Concepts and Administration Guide* for more information.)
 - If you use the environment variable `TNS_ADMIN`, make sure that it is set to the `ORACLE_HOME/network/admin` directory in the Oracle home for Oracle9iAS Database Cache.
2. If your application was running previously on the node on which you installed Oracle9iAS Database Cache and the application connected to the origin database by using an entry in an existing `tnsnames.ora` file, you must copy that entry to the `tnsnames.ora` file used by Oracle9iAS Database Cache.

The `tnsnames.ora` file is located in the `ORACLE_HOME/network/admin` directory. Copy the entry from the file in the previously existing Oracle home to the `tnsnames.ora` file in the Oracle home in which you installed Oracle9iAS Database Cache.

Note that the Oracle9iAS Database Cache installation creates an entry for the origin database in the `tnsnames.ora` file on the local cache node. It assigns the alias `ora_ocache_origin`. Do not modify or delete the `ora_ocache_origin` entry. To assign a different alias for another purpose, edit the `tnsnames.ora` file and add another entry. The Oracle9iAS Database Cache installation also creates an entry, `ora_ocache`, for the cache. Do not modify or delete this entry.

Using a Previous Oracle8i/Release 8.1.6 Oracle Home

If you previously ran your application from the Oracle home for Oracle8i Server or Client release 8.1.6 or 8.1.6.1 and you continue to need to run your application from that Oracle home, you must take the following steps:

Note: Use this method only if you cannot use the Oracle home for Oracle9iAS Database Cache. Do not use this method if your application ran from a release later than 8.1.6.1. Instead, refer to ["Using the Oracle9iAS Database Cache Home"](#) on page 5-36 for the recommended method.

1. Copy the following library files from the Oracle home in which you installed Oracle9iAS Database Cache to the Oracle home for the Oracle8i server or client that your application uses:
 - `ORACLE_HOME/lib/libclient8.a`
 - `ORACLE_HOME/lib/libgeneric8.a` (not required for 8.1.6.1)
 - `ORACLE_HOME/lib/libwtc8.so`
 - `ORACLE_HOME/lib/libwtc8.a`
2. Set the following environment variables to the Oracle home for the Oracle8i server or client that your applications uses:
 - Set `ORACLE_HOME` to the Oracle home.
 - Set `LD_LIBRARY_PATH` to `ORACLE_HOME/lib`.
 - Set `PATH` to include `ORACLE_HOME/bin`.
3. From the Oracle home for the Oracle8i server or client that your application uses, run the executable file `genclntsh`, which is located in the `ORACLE_HOME/bin` directory.
4. Copy the SQL*Plus executable file from the Oracle home in which you installed Oracle9iAS Database Cache to the Oracle home for the Oracle8i server or client that your application uses.
5. Set the value of the environment variable `ORA_OCI_CACHE` to "1" so that all applications started from the process will use the cache. (Alternatively, you can use parameters within OCI applications to control which applications or statements use the cache.)

6. If you use the environment variable or registry parameter `TNS_ADMIN`, make sure it points to the Oracle home that your application uses.
7. Copy the entries in the `tnsnames.ora` file from the Oracle home in which you installed Oracle9iAS Database Cache to the `tnsnames.ora` file in the Oracle home for the Oracle8i server or client that your application uses.

Relinking Applications That Use Releases Previous to Release 8.1.6

If your application was compiled and linked using a release prior to Oracle8i Server or Client release 8.1.6, you must relink your application using the OCI libraries that are installed by Oracle8i Cache.

For information about relinking applications, see *Oracle Call Interface Programmers Guide* and *Oracle8i Administrator's Reference* in the database documentation.

Then, you must take the steps described in ["Using the Oracle9iAS Database Cache Home"](#) on page 5-36.

Modify the `initicache.ora` File

The Oracle9iAS Database Cache installation creates a cache using the same database character set as the origin database. However, it does not set other National Language Support (NLS) features, such as date format or currency symbols.

If the initialization file (`initSID.ora`) of your origin database specifies NLS parameters, you must copy those parameters to the initialization file (`initicache.ora`) of the cache. (NLS parameters begin with "NLS_".)

For example, if the initialization file of your origin database contains the following parameters, copy them to `initicache.ora`:

```
NLS_LANGUAGE = JAPANESE
NLS_CALENDAR = "Japanese Imperial"
NLS_DATE_FORMAT = "E YY-MM-DD"
```

The file `initicache.ora` is located in the following directory:

```
ORACLE_HOME/admin/icache/pfile
```

For information about setting up your caches and additional information about configuring your application environment, see the *Oracle9iAS Database Cache Concepts and Administration Guide*.

SSL Authentication Method Configuration

This section guides you through configuring SSL for Oracle9iAS Database Cache, Oracle Servlets Engine for Java, Distributed CORBA Applications, and Enterprise JavaBeans.

These steps guide you through the SSL configuration for the following:

Oracle9iAS Database Cache

To configure Oracle9iAS Database Cache to use SSL, remove the comment characters (#) from the following entry in the `listener.ora` file:

For secure connections over SSL, uncomment the following lines:

```
# (DESCRIPTION = # Secure TCP connections
#       (ADDRESS =
#         (PROTOCOL = TCPS) (HOST = host_name) (PORT = 2484)
#       )
# )
```

The listener will listen for all SSL requests.

Oracle Servlets Engine for Java

To configure Oracle Servlets Engine for Java to use SSL, (in addition to removing the comment characters from the appropriate line in the initialization file) you must remove the comment characters (#) from the following entry in the `tnsnames.ora` file:

```
# Support for mod_ose over TCP with SSL connections.
# instl_https =
#   (DESCRIPTION =
#     (ADDRESS =
#       (PROTOCOL=TCPS)
#       (HOST=host_name)
#       (PORT=2484)
#     )
#     (CONNECT_DATA=
#       (SERVICE_NAME=MODOSE)
#       (SERVER=shared)
#       (PRESENTATION=http://admin)
#     )
#   )
```

Distributed CORBA Applications and Enterprise JavaBeans

To configure distributed CORBA application and Enterprise JavaBeans to use SSL, (in addition to removing the comment characters from the appropriate line in the initialization file) you must remove the comment characters (#) from the following entry in the `listener.ora` file:

For secure IIOP connections over SSL, uncomment the following lines:

```
# (DESCRIPTION = # Secure IIOP Connections
#   (PROTOCOL_STACK =
#     (PRESENTATION=GIOP)
#     (SESSION=RAW)
#   )
#   (ADDRESS=(PROTOCOL=TCPS)(HOST=% s_host_name%)(PORT=2482))
# )
```

Multi-threaded Server Configuration

These steps guide you through configuring Oracle9iAS Database Cache as a Multi-threaded server for Oracle Servlets Engine for Java, Distributed CORBA Applications, and Enterprise JavaBeans:

Oracle Servlets Engine for Java

To configure Oracle9iAS Database Cache as a multi-threaded server (MTS) for Oracle Servlets Engine for Java, you must make one or both of the following changes to your initialization file (`instSID.ora`):

- For standard connections, remove the comment character (#) from the following line:

```
# mts_dispatcher = "(PROTOCOL=TCP)(SERV=MODESE)"
```

- To use the secure socket layer (SSL) authentication method, remove the comment character (#) from the following line:

```
# mts_dispatcher = "(PROTOCOL=TCPS)(SERV=MODESE)"
```

For information on enabling SSL for Oracle9iAS Portal, refer to *Oracle Portal 3.0.8 Configuration Guide*.

Distributed CORBA Applications and Enterprise JavaBeans

To configure Oracle9iAS Database Cache as a multi-threaded server (MTS) for distributed CORBA applications and Enterprise JavaBeans, you must make the following changes in your initialization file (`instSID.ora`):

- Remove the comment character (#) from the following line:

```
# mts_dispatcher = "(PROTOCOL=TCP)(PRE=oracle.aurora.server.SGiopServer)"
```

- To use the secure socket layer (SSL) authentication method, remove the comment character (#) from the following line:

```
# mts_dispatcher = "(PROTOCOL=TCPS)(SERV=oracle.aurora.server.SGiopServer)"
```

Starting and Stopping Components

Table 5–3 lists the commands needed to start and stop the components.

Table 5–3 Starting and Stopping Components

Component	Function	Command
Oracle9iAS Database Cache	Start	<code>ORACLE_HOME/bin/cachstrt</code>
	Stop	<code>ORACLE_HOME/bin/cachshut</code>
Oracle9iAS Discoverer	Start	<code>ORACLE_HOME/6iserver/discwb4/util/startall.sh</code>
	Stop	<code>ORACLE_HOME/6iserver/discwb4/util/stopall.sh</code>
Oracle9iAS Forms Services	Start	<code>ORACLE_HOME/6iserver/forms60_server start</code>
	Stop	<code>ORACLE_HOME/6iserver/forms60_server stop</code>
Oracle9iAS Reports Services	Start	<code>ORACLE_HOME/6iserver/reports60_server start</code>
	Stop	<code>ORACLE_HOME/6iserver/reports60_server stop</code>
Oracle9iAS Web Cache	Start	<code>ORACLE_HOME/webcache/bin/webcachectl start</code>
	Stop	<code>ORACLE_HOME/webcache/bin/webcachectl stop</code>
Oracle9iAS Wireless Web Integration Server	Start	<code>ORACLE_HOME/panama/WebIntegration/Server/bin/server.sh</code>
	Stop	Go to <code>http://hostname.domainname:5555</code> and click on shutdown.
Oracle HTTP Server	Start	<code>ORACLE_HOME/Apache/Apache/bin/apachectl start</code>
	Stop	<code>ORACLE_HOME/Apache/Apache/bin/apachectl stop</code>
Oracle HTTP Server SSL-enabled	Start	<code>ORACLE_HOME/Apache/Apache/bin/apachectl startssl</code> (Log in as root user.)
	Stop	<code>ORACLE_HOME/Apache/Apache/bin/apachectl stopssl</code> (Log in as root user.)
Oracle Internet File System	Start	<code>ORACLE_HOME/ifs1.1/bin/ifsstart</code>
	Stop	<code>ORACLE_HOME/ifs1.1/bin/ifsstop</code>
Oracle Management Server	Start	<code>ORACLE_HOME/bin/oemctrl start oms &</code>
	Stop	<code>ORACLE_HOME/bin/oemctrl stop oms &</code>

Component Web Sites

[Table 5–4](#) lists Web sites for Oracle9i Application Server components.

Table 5–4 Component Web sites

Component	Web Site
Oracle9iAS Discoverer	<code>http://hostname.domain:7777/discoverer4i/viewer</code>
Oracle9iAS Forms Services	<code>http://hostname.domain:7777/dev60html/runform.htm</code>
Oracle9iAS Portal	<code>http://hostname.domain:7777/pls/portal30</code>
Oracle9iAS Reports Services	<code>http://hostname.domain:7777/dev60html/runrep.htm</code>
Oracle9iAS Wireless Web Integration Server	<code>http://hostname.domain:5555</code> (Log on as Administrator/manager.)
Oracle9iAS Web Cache	<code>http://hostname.domain:4000</code> (Log on as Administrator/Administrator.)
Oracle HTTP Server	<code>http://hostname.domain:7777</code>
Oracle HTTP Server (SSL-enabled)	<code>https://hostname.domain:80</code>
Oracle Internet File System	<code>http://hostname.domain:7777/ifs/files</code> (Log on as system/manager.)
Oracle Management Server	<code>http://hostname.domain:3339</code>

Component Port Numbers

Table 5–5 lists the default port numbers on which requests are received for each component.

Table 5–5 Port Numbers

Components	Port Number
Oracle9iAS Database Cache Oracle9iAS Database Cache TNS Listener Oracle9iAS Database Cache -wtcme process Oracle9iAS Database Cache Data Gatherer -vppdc process	51719 TCP/IP: 1521, IIOP: 2481 51719, 51720 1808, 1809
Oracle9iAS Discoverer	Oracle9iAS Discoverer uses the same port number as Oracle HTTP Server
Oracle9iAS Forms Services Load Balancer Client Load Balancer Server	9001 9011 9021
Oracle9iAS Portal	Oracle9iAS Portal uses the same port number as Oracle HTTP Server
Oracle9iAS Reports Services	1950
Oracle9iAS Web Cache Oracle9iAS Web Cache Administration Port Oracle9iAS Web Cache Invalidation Port Oracle9iAS Web Cache Statistics Port	1100 4000 4001 4002
Oracle9iAS Wireless Oracle9iAS Wireless Web Integration Server	Oracle9iAS Wireless uses the same port as Oracle HTTP Server 5555
Oracle HTTP Server Oracle HTTP Server (SSL-enabled) Oracle HTTP Server Jserv Servlet Engine	7777 80 8007
Oracle Internet File System	Oracle Internet File System uses the same port number as Oracle HTTP Server FTP: 21 SMB: 139 SMTP: 2500 IMAP: 143 CUP: 4180
Oracle Enterprise Java Engine TNS Listener	TCP/IP: 1521 IIOP: 2481
Oracle Management Server	7771, 7772, 7773

Additional Documentation

For further information on postinstallation and configuration tasks, refer to component-specific documentation. For information on viewing and installing the documentation, refer to [Appendix E, "Installing Documentation Library"](#).

Non-Interactive Installation

This chapter guides you through the non-interactive installation of Oracle9i Application Server. The topics include:

- [Introduction](#)
- [Setting a Response File](#)
- [Specifying a Response File](#)
- [Error Handling](#)
- [Validation of Values from Response File](#)

Introduction

You can perform a non-interactive installation of Oracle9i Application Server by supplying the Oracle Universal Installer with a *response file*. The installer uses the variables and values contained in this text file to provide answers to some or all of the installer user prompts. If you include responses for all of the installer prompts in the response file, then you can run a “silent” installation that displays no graphical output.

Requirements

For a complete list of requirements, refer to [Chapter 1, "Requirements"](#).

Setting a Response File

There are three Oracle Universal Installer response files, one for each installation option, included on the Oracle9i Application Server, Release 1.0.2.1.0 CD-ROM. You will need to edit the response file to suit your installation option.

To use a response file, copy the response file from the Oracle9i Application Server CD-ROM to a drive mounted on your system. For example:

```
prompt> cd mount_point/Disk1/stage/Response/

prompt> cp oracle.iappserver.iapptop.Enterprise.rsp local_directory
```

Edit the response file you want to use with any text editor to include information specific to your system. Each file contains instructions for properly configuring the response file.

[Table 6–1](#) lists the response files included on the Oracle9i Application Server CD-ROM.

Table 6–1 Response Files

Oracle9i Application Server installation option	File Name
Minimal Edition	oracle.iappserver.iapptop.Minimal.rsp
Standard Edition	oracle.iappserver.iapptop.Standard.rsp
Enterprise Edition	oracle.iappserver.iapptop.Enterprise.rsp

Specifying a Response File

To make the installer use the response file at install time, follow the same steps to launch the installer, but specify the location of the response file that you wish to use as a parameter when starting the installer. To make a configuration assistant use a response file, invoke it at the command line using the same parameters.

See Also: ["Starting Oracle Universal Installer"](#) on page 2-28

```
prompt> ./runInstaller [-silent] -responseFile absolute_path_and_filename
```

To perform a completely silent installation or configuration session, use the `-silent` parameter.

To run Oracle Enterprise Manager Configuration Assistant in non-interactive mode, you must use both the `-silent` and `-responseFile` parameters.

The success or failure of the installation is logged in the `installActions.log` and `silentInstall.log` file. The log files are created in the `oraInventory` directory during installation. For more information, refer to ["oraInventory Directory"](#) on page 2-27.

Note: The installer or configuration assistant will fail if you attempt a non-interactive session without appropriately configuring a response file.

Error Handling

Values for variables that are of the wrong context, format, or type are treated as if no value were specified. Variables which are outside any section are ignored.

A non-interactive installation fails if no response file is specified, or if you attempt a silent installation with an incorrect or incomplete response file. If you attempt a silent installation and the installer encounters an error, such as insufficient disk space, then the installation fails. The results of your non-interactive installation is recorded in the installation session log file. For more information, refer to ["oraInventory Directory"](#) on page 2-27.

Validation of Values from Response File

The installer or configuration assistant performs calculation and validation of the response file at runtime. Failure of the validation process ends the installation or configuration.

Deinstallation and Reinstallation

This chapter guides you through the deinstallation and reinstallation process for Oracle9i Application Server. They are described in the following topics:

- [Deinstallation](#)
- [Reinstallation](#)

Deinstallation

The following steps guide you through the deinstallation process of Oracle9i Application Server. This process is divided into three parts:

- [Deinstalling Using Oracle Installer](#)
- [Deinstalling Oracle9iAS Database Cache](#) (only if you have installed Enterprise Edition)
- [Deinstalling using Oracle Universal Installer](#)

Note: Be sure to stop all services and processes before starting the deinstallation process.

Deinstalling Using Oracle Installer


Follow the instructions below to deinstall Oracle9iAS Discoverer.

1. Launch Oracle Installer from the following command:

```
prompt> cd ORACLE_HOME/6iserver/orainst
prompt> ./orainst /m
```

2. Enter the Oracle home location and click **OK**.


Figure 7–1 Oracle Home Location Screen

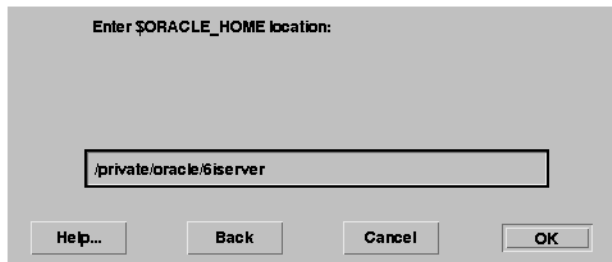

Oracle Home Location screen allows you to enter the Oracle home location of Oracle9iAS Discoverer. Be sure to enter `ORACLE_HOME/6iserver` in the field.

3. Select **Custom or Remove**, and click **OK**.


Figure 7–2 Discoverer Server Installation Options Screen

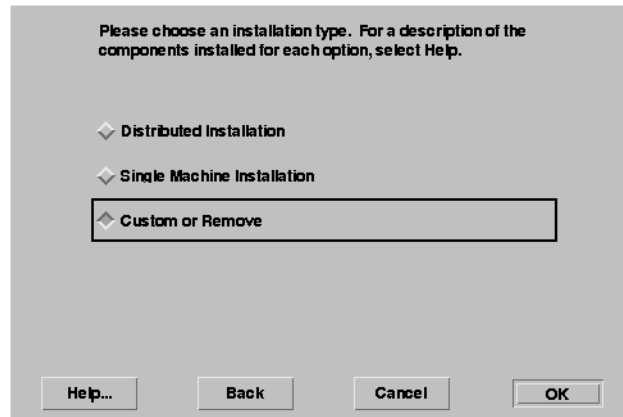

Discoverer Server Installation Options screen provides you with installation and deinstallation options.

4. Select Oracle Discoverer Plus, Oracle Discoverer Server, and Oracle Discoverer Viewer, and click **Remove**.


Figure 7–3 Software Asset Manager Screen

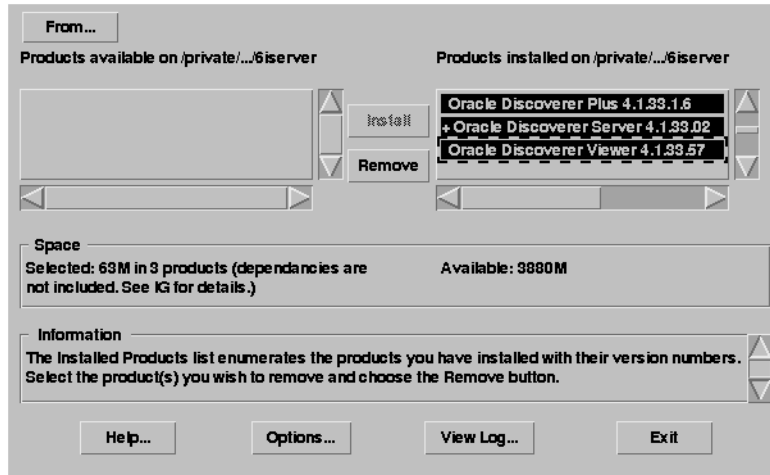

Software Asset Manager screen allows you to select the components you wish to deinstall. Scroll down the list and click on Oracle Discoverer Plus, Oracle Discoverer Server, and Oracle Discoverer Viewer to select them. Do **not** select any other components. When you click on **Remove**, you will get a confirmation screen asking if you wish to remove the selected components. Click **Yes**.

5. Monitor the deinstallation process.

Figure 7–4 Deinstallation Progress Bar Screen

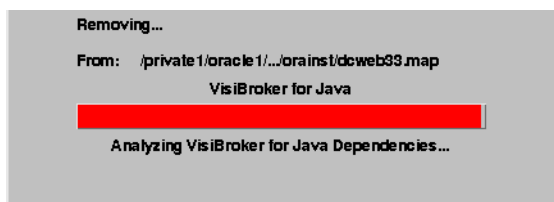

6. Once the deinstallation process concludes, quit the installer by clicking **Exit**.

You have successfully deinstalled Oracle9iAS Discoverer. Continue the deinstallation process:

- If you installed Enterprise Edition, proceed to ["Deinstalling Oracle9iAS Database Cache"](#) on page 7-5.
- If you installed Oracle HTTP Server Only or Standard Edition, proceed to ["Deinstalling using Oracle Universal Installer"](#) on page 7-6.

Deinstalling Oracle9iAS Database Cache

If you have installed the Enterprise Edition of Oracle9i Application Server, then you must perform the following steps. If you have installed any other edition of Oracle9i Application Server, then proceed directly to ["Deinstalling using Oracle Universal Installer"](#) on page 7-6.

1. Make sure the cache is started. If it is not, then start the cache using the Cache Manager or the `cachstrt` script which is located in `ORACLE_HOME/bin` directory.
2. Run the Configuration Assistant, specifying the `-deinstall` option:

```
prompt> wtacca -deinstall
```


Proceed to ["Deinstalling using Oracle Universal Installer"](#) on page 7-6.

Deinstalling using Oracle Universal Installer

1. Start the Oracle Universal Installer. For information on starting the installer, refer to "[Starting Oracle Universal Installer](#)" on page 2-28.

Once Oracle Universal Installer is launched, Welcome screen appears. Click on **Deinstall Products**.

Figure 7-5 Welcome Screen

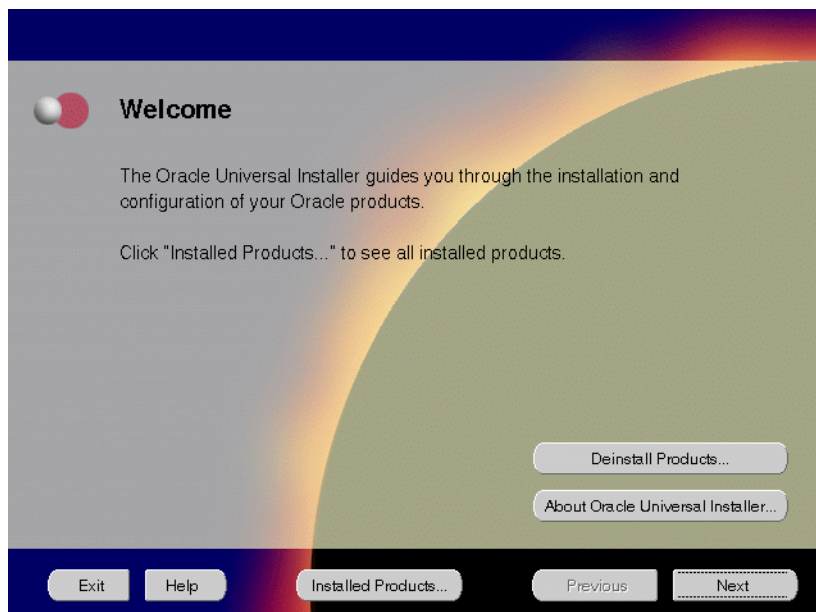


The Welcome screen provides information about Oracle Universal Installer.

The installer provides you with two ways to deinstall products:

- **Deinstall Products:** To deinstall individual components or the entire product.
- **Installed Products:** To view currently installed products and deinstall individual components or the entire product.

2. Review all installed components and check the ones you wish to deinstall. Click **Remove**.

Figure 7–6 Inventory Screen

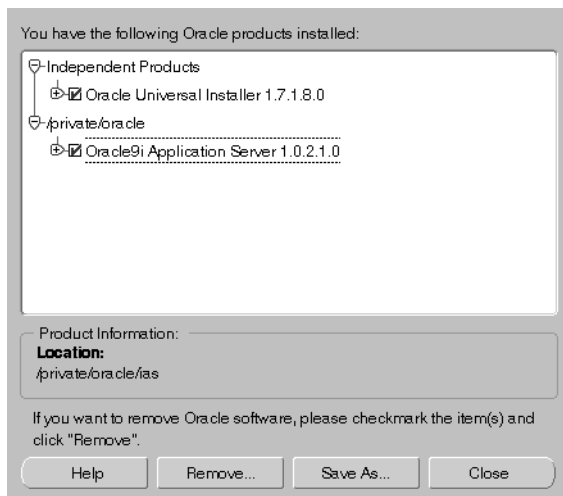

The Inventory screen appears when you click **Deinstall Products** on the Welcome screen, or **Installed Products** on any screen.

The Inventory screen displays all the components installed in Oracle home.

The following buttons and product information appear on the Inventory screen:

- **Help:** To access detailed information about the functionality of the Inventory screen.
- **Remove:** To deinstall all checked components from Oracle home.
- **Save As:** To save the inventory as text. A file browser dialog pops up when you click **Save As**. Accept a file name and the complete inventory list as displayed by the inventory screen will be logged into this file as text.
- **Close:** To quit the Inventory screen.
- **Location:** To view the full location path of the selected component.


Note: The “+” sign before a product name indicates that there are more components and files installed within that particular product. Click on it to view dependent components. If you choose to remove a product or component, then all of its dependent components and files are also deinstalled.

If you wish to deinstall Oracle9i Application Server completely, check the box displayed before the product name, which is listed directly below the Oracle home name.

Note: If you deinstall a product or component, then all of its dependent components and files will also be deinstalled.

3. Verify the components selected for deinstallation, and click **Yes**.

Figure 7-7 Confirmation Screen

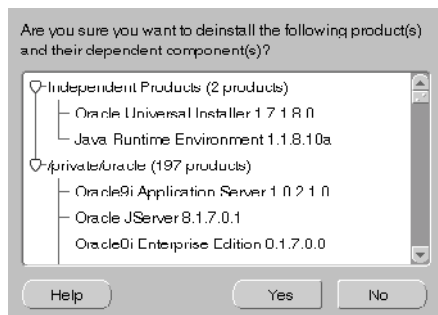

The Confirmation screen lists all the components selected for deinstallation in the previous step. Scroll down the screen to verify selected components.


Note: Oracle Universal Installer does not deinstall all the files and directories during deinstallation. These must be deleted manually.

The following buttons appear on the Confirmation screen:

- **Help:** To access detailed information about the functionality of the Confirmation screen.
- **Yes:** To start deinstallation of listed components.
- **No:** To return to the Inventory screen. Listed components are not removed from Oracle home.

4. Monitor the deinstallation process.

Figure 7–8 Remove Progress Bar Screen

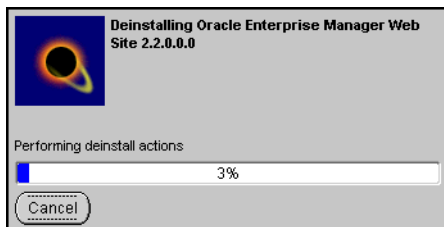

The Remove Progress Bar screen appears when you click **Remove**. The installer detects all components chosen for deinstallation from the Inventory screen and removes them from Oracle home.

- **Cancel:** To discontinue the deinstallation process.

Note: If you deinstall a product or component, then all of its dependent components and files will also be deinstalled.

You have successfully deinstalled Oracle9i Application Server.

Reinstallation

Oracle Universal Installer does not allow reinstallation of Oracle9i Application Server over an already installed version. To reinstall Oracle9i Application Server over the same version, deinstall and then install the product.

See Also: ["Deinstallation"](#) on page 7-2

Configuration Tools

This appendix guides you through the steps required to run component-specific configuration assistants to configure Oracle9i Application Server. It contains instructions on manually launching, and running the following configuration assistants to configure the components you chose not to configure during installation:

- [Net8 Configuration Assistant](#)
- [Oracle9iAS Database Cache Configuration Assistant](#)
- [Oracle9iAS Portal Configuration Assistant](#)
- [Oracle Database Configuration Assistant](#)
- [Oracle Internet File System Configuration Assistant](#)
- [Oracle Management Server Configuration Assistant](#)

Net8 Configuration Assistant

For information on running the Net8 Configuration Assistant, refer to the *Net8 Administration Guide* in your database documentation library.

Oracle9iAS Database Cache Configuration Assistant

Before you can run the Oracle9iAS Database Cache Configuration Assistant, you need to configure the `ora_icache_origin` service manually.

The `tnsnames.ora` in the `ORACLE_HOME/network/admin` directory has the following entry after installation:

```
ora_icache_origin =
  (DESCRIPTION =
    (ADDRESS_LIST =
      (ADDRESS =
        (PROTOCOL = TCP)
        (HOST = ORIGINHostName)
        (PORT = originPortNumber>))
      )
    (CONNECT_DATA =
      (SERVICE_NAME = originServiceName)
    )
  )
```


Fill in the origin host name, port and service name in `tnsnames.ora` file as per the above example before running the following command to launch the Oracle9iAS Database Cache Configuration Assistant:

```
prompt> ORACLE_HOME/bin/wtacca -create -typical
```

The following steps guide you through the Oracle9iAS Database Cache Configuration Assistant:

1. Review the Oracle9iAS Database Cache Configuration Assistant welcome screen and click **Next**.


Figure A–1 *Welcome Screen*

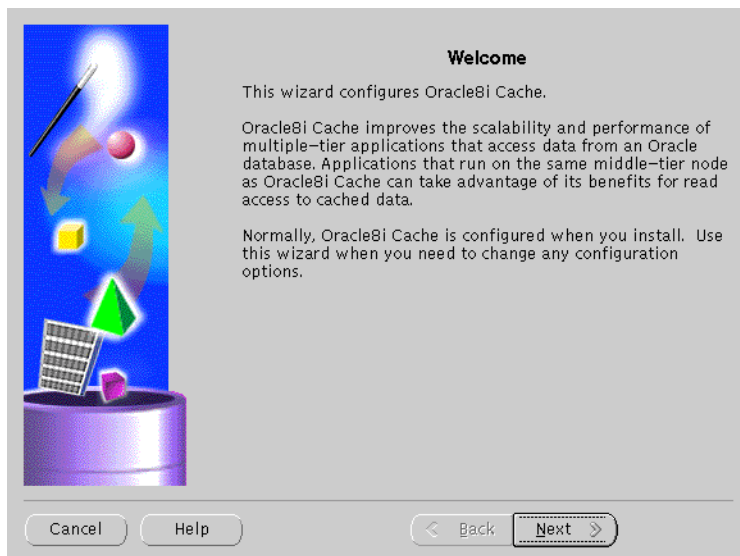

The Welcome screen introduces you to the Oracle9iAS Database Cache Wizard.

2. Enter the privileged account information and click **Next**.

Figure A–2 *Origin Database Credentials Screen*

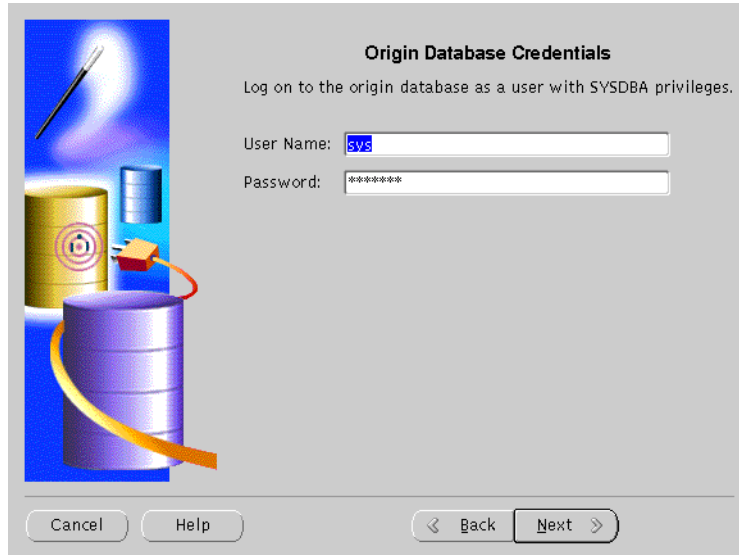The image shows a graphical user interface window titled "Origin Database Credentials". On the left side of the window is a vertical illustration featuring a blue background with a yellow lightning bolt, a yellow database cylinder with a red padlock, and a purple database cylinder with an orange ribbon. The main area of the window has a light gray background. Below the title, there is a line of text: "Log on to the origin database as a user with SYSDBA privileges." Below this text are two input fields. The first is labeled "User Name:" and contains the text "sys". The second is labeled "Password:" and contains a series of asterisks "*****". At the bottom of the window, there are four buttons: "Cancel", "Help", "< Back", and "Next >".

Origin Database Credentials

Log on to the origin database as a user with SYSDBA privileges.

User Name:

Password:


Cancel Help < Back Next >

The Origin Database Credentials screen specifies the database that is the original and primary storage for the data that you cache on the middle-tier node.

- **User Name:** The name of a user on the origin database who has the SYSDBA role. This field defaults to the information you entered in the Origin Database User Information screen during installation.
- **Password:** The password of the specified user. This field defaults to the information you entered in the Origin Database User Information screen during installation.

3. Review the summary screen and click **Finish** to configure the cache.


Figure A-3 Summary Screen

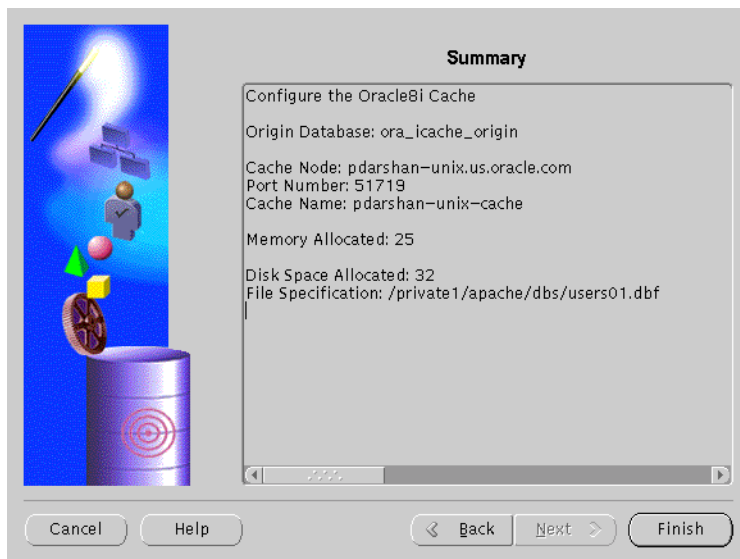

The Summary screen provides information about the origin database, cache node, port number, cache name, memory, disk space allocated and file specification.

4. Monitor the Configuration Assistant as it configures your cache.

Figure A–4 *Cache Configuration Assistant Progress Screen*

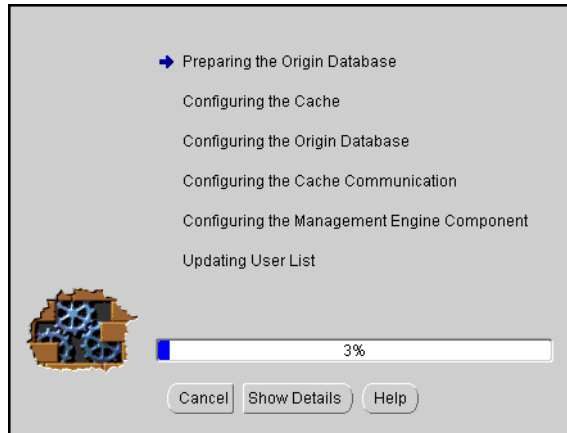

The Cache Configuration Assistant Progress screen informs you of the results of the configuration.

- **Show Details:** To display detailed result of the configuration.

Oracle9iAS Portal Configuration Assistant


The following command launches the Oracle9iAS Portal Configuration Assistant:

```
prompt> ORACLE_HOME/assistants/opca/launch.sh
```

The following steps guide you through the Oracle9iAS Portal Configuration Assistant:

1. Choose the first installation option to install Oracle9iAS Portal and the Login Server and click **Next**.

Figure A–5 *Installation Options Screen*

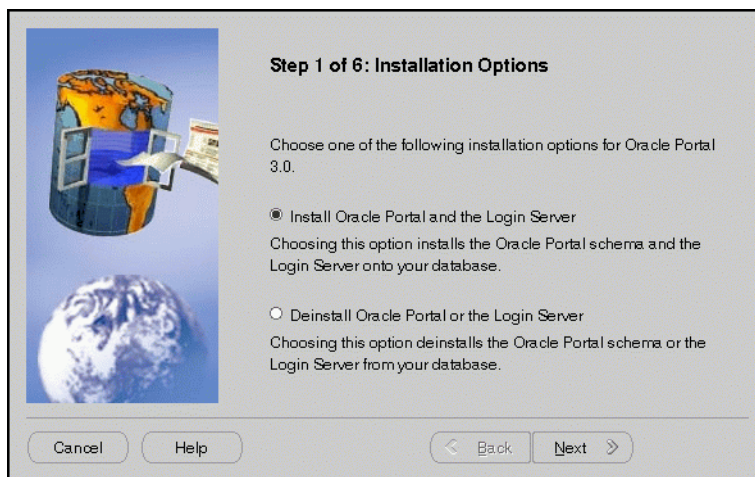

The Installation Options screen allows you to install and deinstall Oracle9iAS Portal. Selecting “Install Oracle9iAS Portal and the Login Server” installs the Oracle9iAS Portal schema and the Login Server onto your database.

2. Enter the database connection information and click **Next**.

Figure A–6 Database Authentication Screen

Step 2 of 6: Database Authentication

To install the Oracle Portal database objects, the Configuration Assistant must connect to the database as the SYS user. Enter the SYS password and connect information for the database on which you want to install. The database must be up and running.

SYSpassword

Connect Information

NOTE: The format for the connect information is HOSTNAME:PORT:SID For example, myserver:1521:orcl Entering a TNS names alias for the database will fail.

Cancel Help Back Next

The Database Authentication screen allows you to specify the database connection information granting the Configuration Assistant database access to install the Oracle9iAS Portal database objects.

Note: Be sure to connect, and store objects in the origin database or any Oracle8i database that you have access to. Otherwise you will get an error stating that the `sys` user is locked.


- **SYS Password:** Enter the `SYS` password for the database on which you want to install Oracle9iAS Portal database objects. When an Oracle database is created, the user `SYS`, identified by the password `CHANGE_ON_INSTALL`, is automatically created and granted the `DBA` role.
- **Connection Information:** Enter the connect information in the following format: `HOSTNAME:PORT:SID`

Example: `oasdocs:1521:oasdocs`

where `hostname` is the domain name and machine where you want to install Oracle9iAS Portal, `port` is the port number on which the Oracle8i database is running, and `SID` is the database name which uniquely identifies a node's instance.

3. Enter the Oracle9iAS Portal Schema and Oracle9iAS Portal DAD names, and click **Next**.

Figure A–7 Oracle9iAS Portal Schema Screen

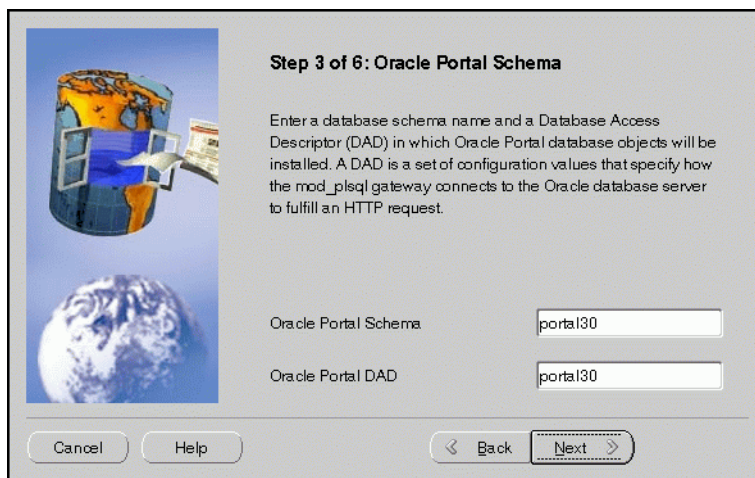

Step 3 of 6: Oracle Portal Schema

Enter a database schema name and a Database Access Descriptor (DAD) in which Oracle Portal database objects will be installed. A DAD is a set of configuration values that specify how the mod_plsql gateway connects to the Oracle database server to fulfill an HTTP request.

Oracle Portal Schema

Oracle Portal DAD

Oracle9iAS Portal Schema screen allows you to enter the Schema and DAD name. These *must* match the Oracle9iAS Portal Schema and DAD name you entered during the installation process on the Apache Listener Configuration for Oracle9iAS Portal (DAD and Schema name) screen. The default is portal30.

4. Enter the SSO Schema and SSO DAD names for the Login Server, and click **Next**.

Figure A–8 Single Sign-On Schema Screen



Step 4 of 6: Single Sign-On (SSO) Schema

Enter a database schema name and Database Access Descriptor (DAD) in which database objects for the Login Server will be installed. The Login Server provides an enterprise-wide SSO mechanism that enables an Oracle Portal user to log in securely to Oracle Portal and any partner and external applications using a single user name and password.

SSO Schema

SSO DAD

Single Sign-On Schema screen allows you to enter the SSO Schema and DAD name. These *must* match the SSO Schema and DAD name you entered during the installation process on the Apache Listener Configuration for Oracle9iAS Portal (Login Server) screen. The default is portal30_sso.

5. Enter the tablespace names for Oracle9iAS Portal installation. Click **Next**.

Figure A–9 *Tablespace Options Screen*



Tablespace Options screen allows you to enter the tablespace names for Oracle9iAS Portal. Choose from the list of tablespaces. For more information, refer to [Table A-1](#).

Table A–1 *Tablespace Options*


Field	Description
Default Tablespace	Used to store any database objects or components created by the Oracle9iAS Portal user. Required minimum: 100 MB
Temporary Tablespace	Improves the concurrence of multiple sort operations, reduce their overhead, or avoid Oracle space management operations altogether. Used for the creation of temporary table segments for operations performed by the Oracle9iAS Portal user such as sorting table rows.

Table A–1 Tablespace Options

Field	Description
Document Tablespaces	<p>Used to store any items uploaded onto an Oracle9iAS Portal content area. These item types can include files, images, folders, and stored procedures.</p> <p>Note: The Document Tablespace will gradually fill as users add items to Oracle9iAS Portal content area. You should choose a tablespace large enough to accommodate these additions or a tablespace that automatically extends itself. Size the document tablespaces according to the planned size of your content areas.</p>
Logging Tablespace	<p>Name of the tablespace where the logs are stored. These contain logging information such as end user requests for components and information about the time of the request, the end user who made the request, the machine and browser that was used, and when an Oracle9iAS Portal developer created or last edited the component. Additional logging information includes database storage allocated to users, objects, and tablespaces, memory allocation, object creation dates, objects created during a given time span, rollback segment attributes, session locks, redo logs, and DBMS jobs.</p>

6. Determine if you want to overwrite or keep the existing PL/SQL Web Toolkit packages. Click **Yes** or **No** accordingly.

Figure A–10 *PL/SQL Web Toolkit Screen*

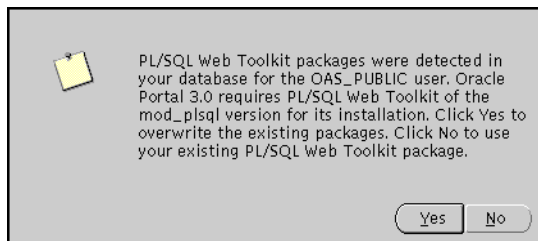


PL/SQL Web Toolkit screen appears only if the configuration assistant detects that PL/SQL Web Toolkit packages already exist on your machine. Click **Yes** to overwrite the existing packages, or click **No** to keep the existing PL/SQL Web Toolkit packages.

Note: Oracle9iAS Portal requires the latest version of PL/SQL Web Toolkit packages. If you are unsure if your existing packages are compatible with PL/SQL Gateway, click **Yes** to install the correct version.

7. Monitor the progress of the configuration assistant as the database objects are installed.


Figure A-11 *Installing Oracle9iAS Portal Screen*

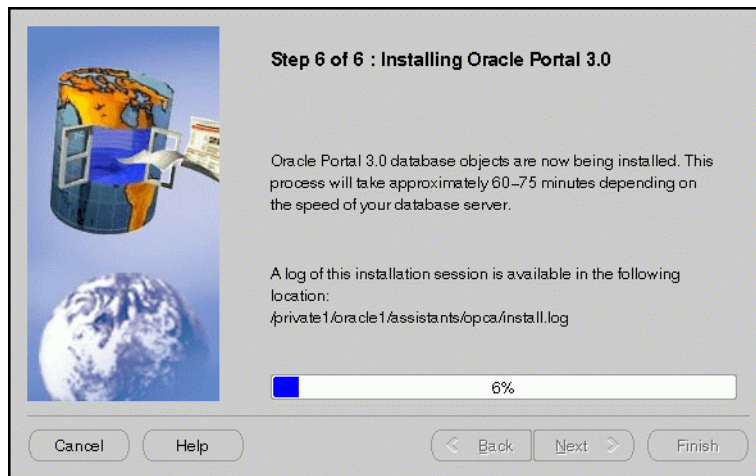

Installing Oracle9iAS Portal screen displays a database objects installation progress bar. Please be patient and refrain from using your machine while this is underway. This process may take a long time to complete.

8. Make note of the information, and click **OK**.

Figure A-12 Summary Screen

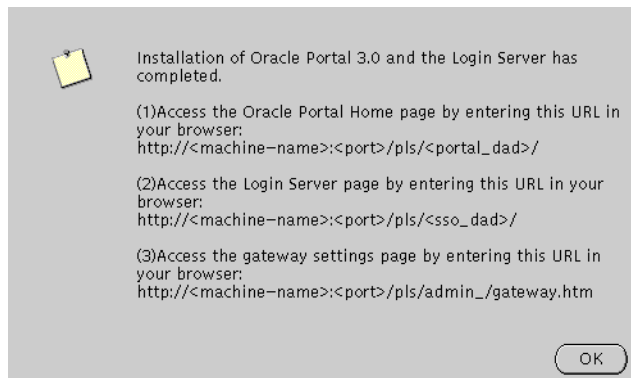

Summary screen appears at the end of installation. It reveals information about accessing the Oracle9iAS Portal Home page, Login Server page and the gateway settings page. For your convenience, make note of this information before clicking **OK**.

9. An installation session log that describes the actions performed and the components installed is created. You can check the log file for ORA and PLS errors that may have occurred during installation. The log file is located in the following locations:

`ORACLE_HOME/assistants/opca/install.log`


Oracle Database Configuration Assistant

The following command launches the Oracle Database Configuration Assistant:

```
prompt> ORACLE_HOME/bin/dbassist
```


The Oracle Database Configuration Assistant creates a database that is used as a container for Oracle Enterprise Java Engine. The following screen appears as the configuration assistant creates the database:

Figure A-13 Oracle Database Configuration Assistant Screen

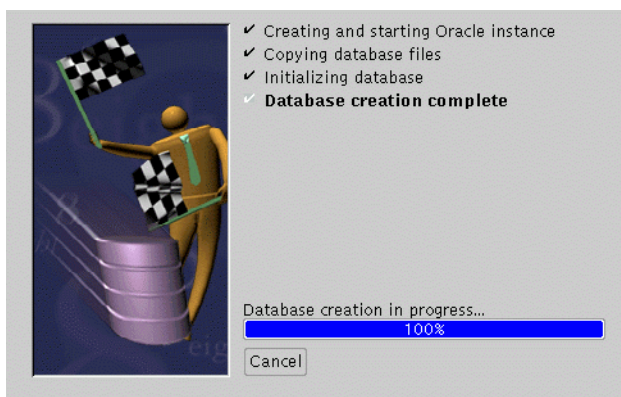

Oracle Database Configuration Assistant does not require any user input. Once the database creation process ends, the following screen appears.

Figure A-14 Database Information Screen

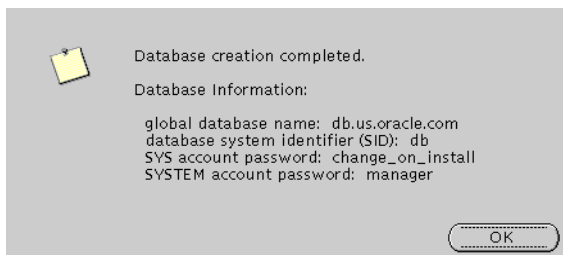

The Database Information screen displays database information such as global database name, database SID, SYS account password, and SYSTEM account password. Make a note of this information and click **OK**. You have completed the database creation process.

Oracle Internet File System Configuration Assistant

The following command launches the Oracle Internet File System Configuration Assistant:

```
prompt> ORACLE_HOME/ifs1.1/bin/ifsconfig
```

Note: Be sure that the origin database is running to store the Oracle Internet File System schema. You must have a TNS name that maps to that database instance.

The following steps guide you through the Oracle Internet File System Configuration Assistant:

1. Review the Welcome screen and click **Next**.

Figure A–15 Welcome Screen



The Welcome screen introduces you to the Oracle Internet File System Configuration Assistant and allows you to review the licensing agreement before you can proceed to configure Oracle Internet File System.

2. Select the database to store Oracle Internet File System, and click **Next**.

Figure A-16 *Select Oracle Database Screen*

Select Oracle Database

Select the Oracle database where the iFS schema will be stored.

Choose whether the database server is running on this local machine or on a remote machine. (Remote Oracle database servers are identified by TNS service names.) Also enter the password for the SYS user.

☐ Oracle8i is on THIS machine

☒ Oracle8i is on another machine

Oracle Database Login

TNS service name: pasdocs.us.oracle.com

TNS service names can be edited with the Oracle Net8 Assistant.

'SYS' password: *****

The default password for the SYS user is CHANGE_ON_INSTALL.

Cancel < Back Next > Configure

Select Oracle Database screen allows you to choose where the Oracle Internet File System schema will be stored. Select whether the origin database is on the local machine or on the remote machine other than the Oracle Internet File System server machine currently being configured.

Note: Be sure to connect, and store objects in the origin database or any Oracle8i database that you have access to. Otherwise you will get an error stating that the `sys` user is locked.

If you select Oracle8i on THIS machine, then you will have to fill in the `SYS` password field.

If you select Oracle8i on another machine, then you will have to enter the TNS service name and the `SYS` password in their respective fields.

- **TNS Service Name:** This is used to identify the database server you want to use for Oracle Internet File System. The TNS Name specifies the hostname, port, protocol, and service name for the database.


See Also: *Net8 Administration Guide* in the Oracle Database Documentation Library

- **SYS Password:** This is the password for the SYS database account.

If an error occurs, you will be required to correct the database connection information before continuing.

3. Choose to create a schema or reuse an existing one, and click **Next**.

Figure A-17 Select IFS Schema Screen

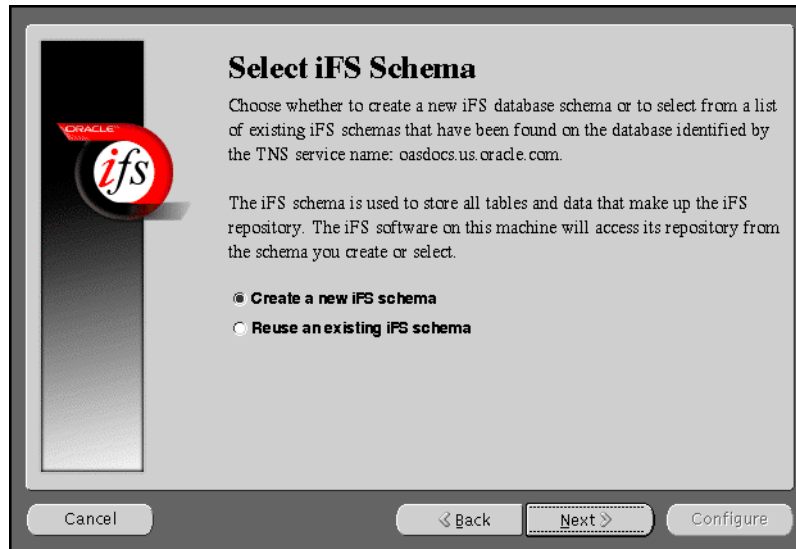

The Select iFS Schema screen allows you to either create a new iFS schema or select from a list of existing iFS schemas that have been found on the database identified by the TNS service name you specified.

Note: If you are migrating from Oracle9i Application Server, Release 1.0.2.0, then you should re-use the existing schema.

If you select “Create a new iFS schema”, then click **Next** to proceed with the instructions provided.

If you select “Reuse an existing iFS schema”, then click **Next**. The following screens will appear:

- a. **Select Existing iFS Schema screen:** This screen informs you of all the existing iFS schemas found on the database identified by the TNS service name you specified. Select an existing schema from the menu and enter its password, and click **Next**.
- b. **Set iFS Options screen:** This screen allows set various iFS options. Set the necessary options, and click **Next**.

- c. **Configure iFS Email screen:** This screen provides you with options to configure your iFS email. Select the necessary options, and click **Next**.
- d. **Configuring iFS screen:** This screen displays the various configuration tasks. Click **Cancel** to stop the configuration.
- e. **iFS Configuration Completed screen:** This screen appears when the configuration completes. It prompts you to run the `ifssetup` script as a root user. The script is located in the `ORACLE_HOME/ifs1.1/bin` directory. This script will configure your system for Oracle Internet File System email, if this option was selected.
- f. Perform the following steps to configure Oracle HTTP Server:

Stop Oracle HTTP Server.

```
prompt> ./apachectl stop
```

Run the following script:

```
prompt> ORACLE_HOME/ifs1.1/bin/ifsapachesetup
```

Be sure to run this script as the user who owns the Oracle software.

See Also: ["UNIX Account to Own Oracle Software"](#) on page 2-11 for more information.

Restart Oracle HTTP Server.

```
prompt> ./apachectl start
```

- g. Restart the Oracle Internet File System using the `ifsstart` script.
- You have completed configuring Oracle Internet File System.

4. Enter an Oracle database username and password for a new schema, and click **Next**.

Figure A-18 Create New iFS Schema Screen

Create New iFS Schema

Enter the name and password for the new iFS schema.

Parameters for new iFS Schema

New schema name: IFSSYS

New password: *****

Retype password: *****

Cancel < Back Next > Configure


Create New iFS Schema screen allows you to specify an Oracle database username and password for the new schema.

- **New Schema Name:** Enter the Oracle database username for the new schema. The default username is `ifssys`.
- **New Password:** Enter the password for the Oracle database user for the new schema.
- **Retype Password:** Re-enter the new schema user password for confirmation.

If you choose to create a new schema with the same name as an existing schema, a warning message appears. Creating a new schema with the same name as an existing schema will drop the existing schema.

5. Set the necessary Oracle Internet File System options, and click **Next**.

Figure A–19 Set iFS Options Screen

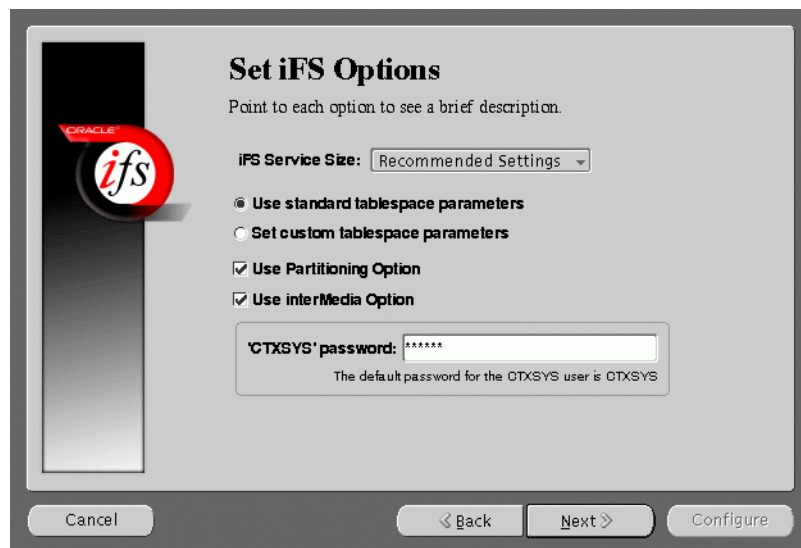

The *iFS* Options screen allows you to set certain schema options and to select a service size for your Oracle Internet File System server. There are two choices for the Oracle Internet File System server size:

- Minimum requirements
- Recommended settings

If you are creating a new Oracle Internet File System schema, then you can choose whether to use standard tablespace parameters, or to specify custom tablespace parameters.


- **Standard Tablespaces:** By default, the Oracle Internet File System configuration creates six tablespaces used to store the data in the Oracle Internet File System schema. The database files for these tablespaces are placed in the same location (on the database machine) as the `SYSTEM` tablespace, which is usually found under `ORACLE_HOME/oradata/global_dbname`. Oracle recommends storing each of these tablespaces on separate disks for best performance.
 - **Primary:** Stores metadata for documents, information about users and groups, and other Oracle Internet File System data.

- **Non-Indexed Medias:** Stores the LOB data for documents that are not indexed by interMedia, such as image, audio, and video files.
- **Indexed Media:** Stores the LOB data documents that are indexed by interMedia, such as text and word processing files.
- **interMedia Index:** Stores the Oracle indexed on interMedia data.
- **interMedia Keymap:** Stores the mapping between interMedia Text information and Oracle Internet File System information.
- **interMedia Data:** Stores the interMedia data about Oracle Internet File System documents.
- **Custom Tablespaces:** Choosing the custom tablespaces option displays six additional pages where the custom tablespace information can be entered. These pages allow experienced database administrators to create customized tablespaces for Oracle Internet File System or to select existing tablespaces.
- **Partitioning Option:** Improves performance. Available only with Oracle8i Enterprise Edition.
- **interMedia Option:** If you have installed interMedia Text, then select this option to use interMedia Text for searching document contents.
- **CTXSYS:** If you choose the interMedia Text option, then enter the password for the interMedia CTXSYS account. The default password is **CTXSYS**.

If you have chosen to use interMedia Text, the Configuration Assistant will verify the interMedia configuration when you click the **Next** button. If an error occurs, then you will not be able to choose the interMedia Text option unless you rectify the error.

6. Enter the Protocol Instance Name, and click **Next**.

Figure A-20 Server Manager Options Screen

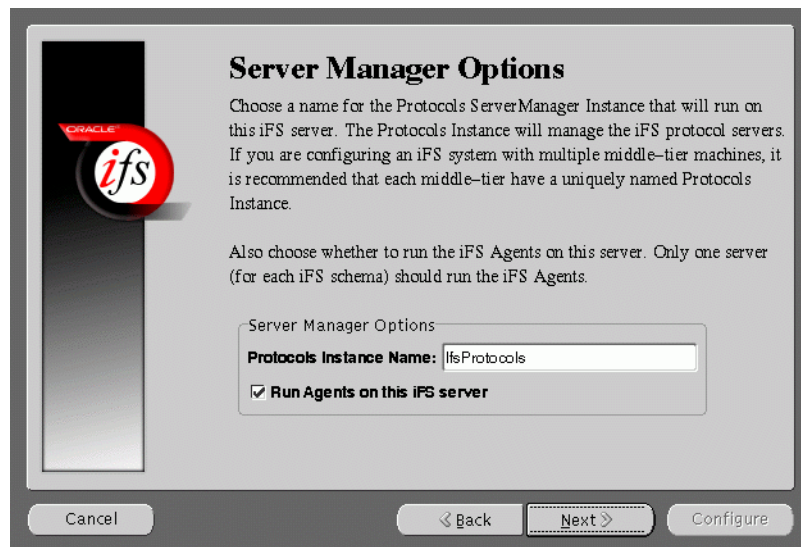


Server Manager Options screen allows you to enter a name for the Protocols Server Manager Instance that will run on this Oracle Internet File System server.

- **Protocol Instance Name:** Enter the Protocols Server Manager Instance name that will run on this Oracle Internet File System server. The Protocols Instance will manage the Oracle Internet File System protocol servers. If you are configuring an Oracle Internet File System system with multiple middle-tier machines, then it is recommended that each middle-tier have a uniquely named Protocols Instance.
- **Run Agents on This iFS Server:** Choose whether to run the Oracle Internet File System Agents on this server. Only one server for each Oracle Internet File System schema should run the Oracle Internet File System Agents.

7. Select the default character set and indexing language, and click **Next**.

Figure A-21 *Language Options Screen*

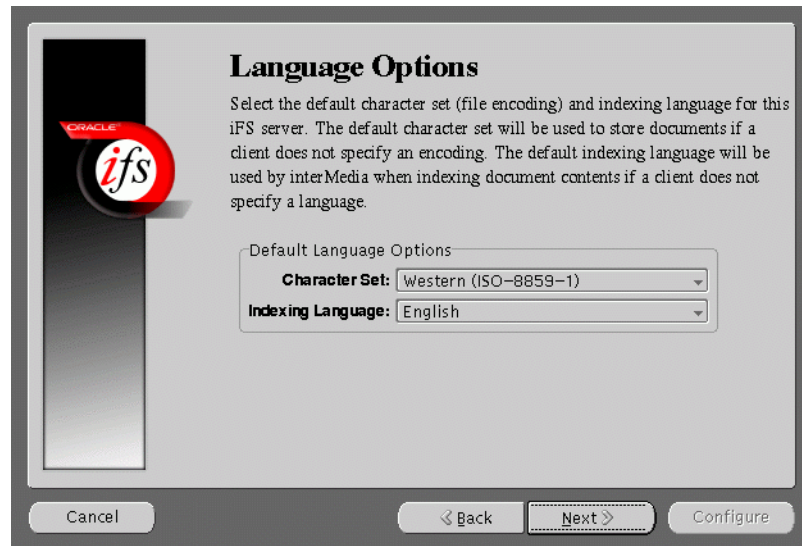

Language Options screen allows you to select the Character set and indexing language for this Oracle Internet File System server.

- **Character Set:** Select the default character set (file encoding). The default character set will be used to store documents if a client does not specify an encoding.
- **Indexing Language:** Select the default indexing language. The default indexing language will be used by interMedia when indexing document comment contents if a client does not specify a language.

8. Select the required Oracle Internet File System protocol serves, and click **Next**.

Figure A–22 *Select iFS Protocol Servers Screen*



Select iFS Protocol Servers screen allows you to select the protocol servers to configure for this Oracle Internet File System server. The following protocol servers are available:

- File Transfer Protocol Server (FTP)
- Server Message Block Server (SMB)
- Windows Client Protocol Server (WCP)
- Simple Mail Transport Protocol Listener (SMTP)
- Internet Mail Access Protocol Server (IMAP)
- Command Line Utility Protocol Server (CUP)

See Also: *Oracle Internet File System Setup and Administration Guide* in the Oracle9i Application Server Documentation Library

9. Select the port numbers for the Oracle Internet File System protocol servers, and click **Next**.

Figure A-23 Set iFS Protocol Server Ports Screen

Set iFS Protocol Server Ports

Specify the ports that each of the iFS protocol servers will use. Either the default or previously chosen ports are shown below. Only protocol servers that require a specific port are listed.

Port Assignments

FTP Server:	21
SMB Server:	139
iFS SMTP Listener:	2500
IMAP Server:	143
CUP Server:	4180

Cancel < Back Next > Configure

Set iFS Protocol Server Ports screen allows you to set port numbers for the protocol servers you selected in the previous screen. The following is a list of protocol servers and their default port numbers:

- **FTP Server:** Port 21
- **SMB Server:** Port 139 (not configurable)
- **iFS SMTP Listener:** Port 2500
- **IMAP Server:** Port: 143
- **CUP Server:** Port 4180

When you click the **Next** button, the port availability on your computer is tested. If a port is already in use, a warning screen appears. A common port conflict can arise because the standard Solaris installation includes a FTP server on port 21, which conflicts with the Oracle Internet File System FTP server. You must resolve such conflicts before starting the Oracle Internet File System protocol servers.

10. Enter your Oracle Internet File System Email Domain, and click **Next**.

Figure A-24 *Configure iFS Email Screen*




Configure iFS Email screen allows you to enter the iFS Email domain.

- **Use NIS for iFS Email:** Click on the check box to use NIS (Network Information System) for your Oracle Internet File System email package.
- **iFS Email Domain:** Enter the default email domain for the users you will create on your Oracle Internet File System server. This option is available only if you are creating a new Oracle Internet File System schema.

11. Review the screen and click **Configure** to begin the Oracle Internet File System configuration process.

Figure A-25 *Begin iFS Configuration Screen*

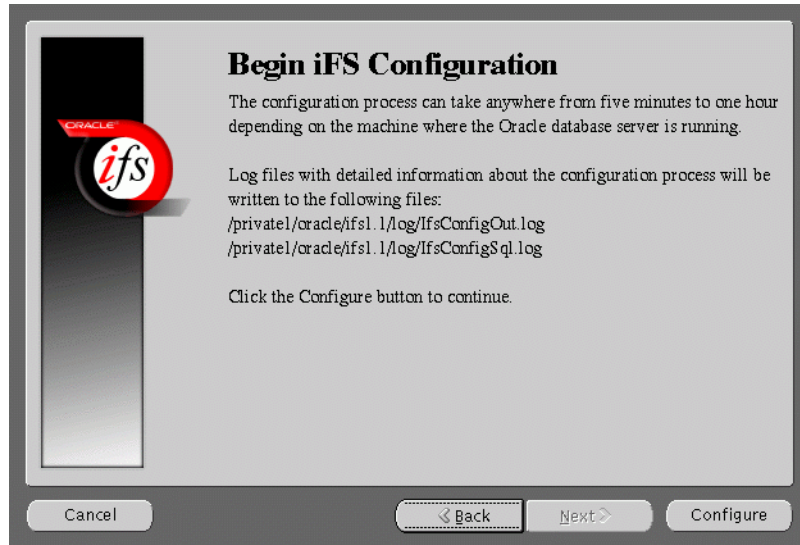

Begin iFS Configuration screen informs the users of the configuration process, and displays the location for the log files.

Once you have started the configuration process, a progress window appears, indicating the progress of the Oracle Internet File System configuration. If an error occurs, check the log files that are displayed on the Begin iFS Configuration screen.

12. A dialog box appears noting that the configuration was successfully completed. Run the `ifssetup` script as a root user.

The script is located in the `ORACLE_HOME/ifs1.1/bin` directory. This script will configure your system for Oracle Internet File System email, if this option was selected.

13. Perform the following steps to configure Oracle HTTP Server:

- a. Stop Oracle HTTP Server.

```
prompt> ./apachectl stop
```

- b. Run the following script:

```
prompt> ORACLE_HOME/ifs1.1/bin/ifsapachesetup
```

Be sure to run this script as the user who owns the Oracle software.

See Also: ["UNIX Account to Own Oracle Software"](#) on page 2-11 for more information.

- c. Restart Oracle HTTP Server.

```
prompt> ./apachectl start
```

- d. Restart the Oracle Internet File System using the `ifsstart` script.

You have completed configuring Oracle Internet File System.

Oracle Management Server Configuration Assistant


The following command launches the Oracle Enterprise Manager Configuration Assistant:

```
prompt> ORACLE_HOME/bin/emca
```

The following steps guide you through the Oracle Enterprise Manager Configuration Assistant:

1. Select “Create a new repository” and click **Next**.


Figure A–26 Configuration Operation

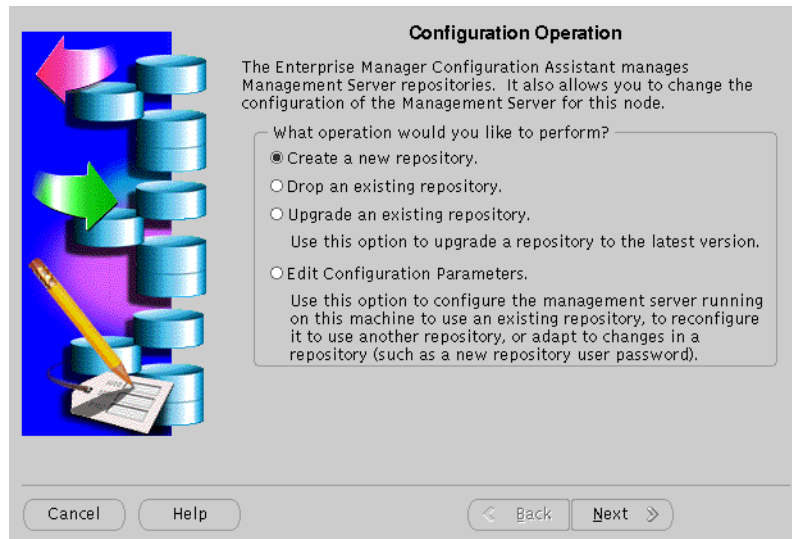

Configuration Operation Screen allows you to create, drop, or upgrade a repository. It also enables you to edit your configuration parameters.

2. Enter the host name, password, and service information, and click **Next**.

Figure A-27 *Select Database for Repository Screen*

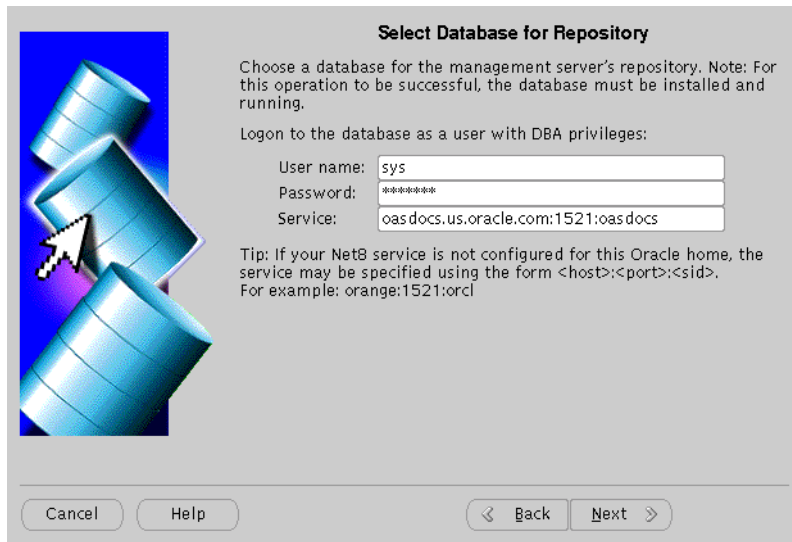

Select Database for Repository

Choose a database for the management server's repository. Note: For this operation to be successful, the database must be installed and running.

Logon to the database as a user with DBA privileges:

User name:

Password:

Service:

Tip: If your Net8 service is not configured for this Oracle home, the service may be specified using the form <host>:<port>:<sid>. For example: orange:1521:orcl


Cancel Help Back Next

Select Database for Repository screen allows you to enter database information for the management server's repository. Be sure to log in as a user with DBA privileges.

- **User name:** Enter a user name, with DBA privileges.
- **Password:** Enter the password for the username.
- **Service:** Enter the *host:port:SID* for the database.

3. Enter the repository login information, and click **Next**.

Figure A-28 Repository Login Information Screen

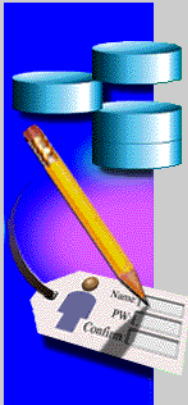

Repository Login Information

An Enterprise Manager repository is owned by a database user. In order to perform this operation, it is necessary to logon to the repository database as this user.

Enter repository user name and password

User name: PDARSHAN-UNIX

Password: *****

Confirm password: *****

☐ Do not save username and password


Cancel Help < Back Next >

Repository Login Information screen allows you to enter the login username and password for the database user.

- **Username:** Enter the database user name who will own the repository.
- **Password:** Enter the password for the username.
- **Confirm Password:** Re-enter the user password for verification.

4. Select to either create a new OEM_REPOSITORY tablespace, or use an existing tablespace, and click **Next**.


Figure A–29 *Select Repository User Tablespaces Screen*

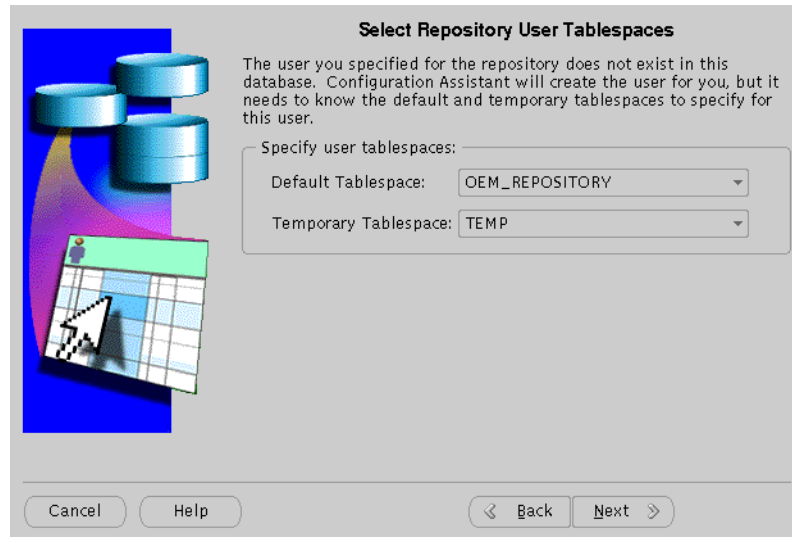

Select Repository User Tablespaces screen allows you to choose between creating a new OEM_REPOSITORY tablespace, or using an existing one.

5. Review the repository summary, and click **Finish**.


Figure A-30 *Create Repository Summary*

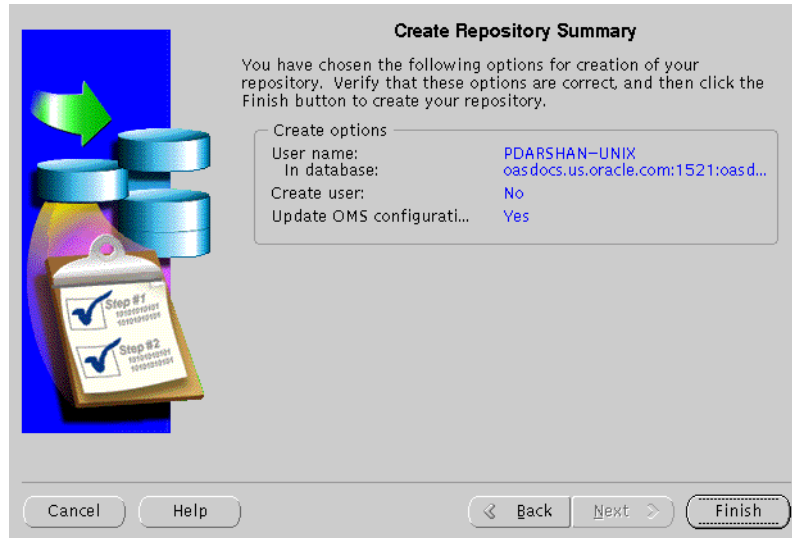

Create Repository Summary screen displays all your repository settings. Be sure to verify them for accuracy.

6. Monitor the repository creation process, and click **Close** when it finishes.

Figure A–31 Configuration Screen

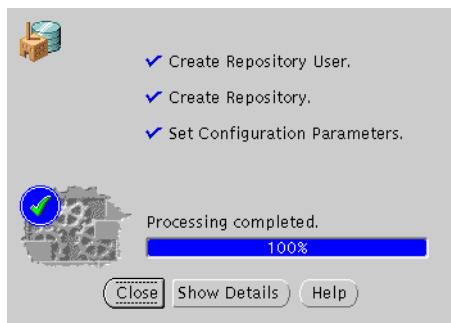

Configuration screen indicates the progress the configuration assistant has made as it creates the repository. Click on **Show Details** if you get an error.

Installing Oracle9i Application Server Administrative and Development Client CD-ROM

The following topics provide an overview for the Oracle9i Application Server Administrative and Development Client CD-ROM components, and guide you through the installation process:

- [Oracle9i Application Server Wireless Edition Client](#)
- [Oracle Enterprise Manager Client](#)

Oracle9i Application Server Wireless Edition Client

The Oracle9i Application Server Wireless Edition Client runs only on the NT platform, and consists of the following components:

- [Service Designer](#)
- [Web Integration Developer](#)

Service Designer

Service Designer is a visual interface for implementing and managing Oracle9iAS Wireless. It creates and modifies Oracle9iAS Wireless objects, including adapters, transformers, and services. Service Designer provides a tree view of the Oracle9iAS Wireless repository. The tree displays Oracle9iAS Wireless objects classes, such as adapters and transformers, as folders or branch nodes. It shows instances of those classes as objects or leaf nodes.

Web Integration Developer

Web Integration Developer is a development environment for creating and testing Web Integration services written in Web Interface Definition Language (WIDL). The Web Integration Developer also has tools that you use to:

- Publish WIDL services for Web Integration Server.
- Create source code for client applications that invoke Web Integration services.
- Create starter code for the development of an integration module.

See Also: ["Configure the Web Integration Developer"](#) on page B-3 for postinstallation configuration instructions.

Note: The Web Integration Developer includes its own Java Virtual Machine (JVM). It does not require any Java setup.

Installation

See Also: ["Oracle9iAS Wireless Client Requirements"](#) on page 1-4 for hardware requirements for installation.

The following steps guide you through the Oracle9i Application Server Wireless Edition Client installation process:

1. Insert the Oracle9i Application Server Administrative and Development Client CD-ROM and run the setup program. The Welcome screen appears. Click **Next**.
2. The File Location screen appears. Select the installation source, and then enter or select the destination Oracle home name and its path. Click **Next**.
3. The Available Products screen appears. Select Oracle9i Application Server Wireless Edition Client 1.1.0 0 0. Click **Next**.
4. The Installation Types screen appears. Select the installation type:
 - **Typical:** Installs the Service Designer and Web Integration Developer.
 - **Custom:** Installs individual components.Click **Next**.
5. The Summary screen appears. Verify the installation selections, and click **Next**.
6. When the installation is complete, the End of Installation screen appears.

Configure the Web Integration Developer

To configure the Web Integration Developer, follow these steps:

Run the Web Integration Developer from the Windows NT Programs menu. **Select Programs > Oracle for Windows NT > Oracle9i Application Server Wireless Edition > Web Integration Developer.**

1. From the **Edit menu**, select **Preferences**, and then **Configuration**.
2. Enter the Proxy (HTTP) and the Secure Proxy (HTTPS) settings appropriate for your environment.
3. Click **OK**.

Oracle Enterprise Manager Client

The Oracle Enterprise Manager Client runs only on the NT platform, and consists of the following components:

- [Oracle Enterprise Manager Console](#)
- [DBA Management Pack](#)

Oracle Enterprise Manager Console

The Oracle Enterprise Manager Console is a graphical user interface that provides menus, toolbars, launch palettes, and the framework to access Oracle tools and utilities available through other vendors. The format of the Console and the tools available are determined by the products purchased and user preferences. Console menus, toolbars, and tool palettes provide access to the Console components and database administration (DBA) applications.

DBA Management Pack

DBA Management Pack is a set of tools that help automate and simplify the common database administrator tasks. All the tools provide an intuitive graphical user interface (GUI), wizards, and a common look-and-feel which minimizes training costs, along with easy-to-use features that let administrators specify what they want to do rather than specify how to do it.

Installation

The following steps guide you through the Oracle Enterprise Manager Client installation process:

1. Insert the Oracle9i Application Server Administrative and Development Client CD-ROM and run the setup program. The Welcome screen appears. Click **Next**.
2. The File Location screen appears. Select the installation source, and then enter or select the destination Oracle home name and its path. Click **Next**.
3. The Available Products screen appears. Select Oracle Enterprise Manager Client 2.2.0.0.0 and click **Next**.

4. The Installation Types screen appears. Select the installation type:
 - **Typical:** Installs the Oracle Enterprise Manager Console, and Database Administrative Tools.
 - **Custom:** Installs individual components.
 - **Minimal:** Installs the minimal required components.
 - **Complete:** Installs all the components.

Click **Next**.

5. The Summary screen appears. Verify the installation selections, and click **Next**.
6. When the installation is complete, the End of Installation screen appears.

Installing Supplemental Components

This appendix introduces you to the Oracle9i Application Server, Release 1.0.2.1 supplemental components, and provides basic installation instruction. The topics include:

- [Overview](#)
- [Supplemental Components](#)

Overview

Oracle9i Application Server supplemental components are installed from the same CD-ROM as Oracle9i Application Server. Installation guides for each component are provided on the Oracle9i Application Server Disk 1.

For instructions on launching the installer, refer to ["Starting Oracle Universal Installer"](#) on page 2-28.

When Oracle Universal Installer appears, you will see the Welcome screen. Review the screen and click **Next**. The next screen is the File Location screen. This screen allows you to enter the full path for the source and destination locations of Oracle9i Application Server. In the `Source` field, enter the full path to the `products.jar` file.

Supplemental Components

This section introduces you to each supplemental component, and provides the full path to each `products.jar` file.

Oracle Gateways

Oracle Gateways are agents for accessing data stored in non-Oracle systems, such that users perceive that all data resides on a local Oracle database server. Each agent is designed specifically for particular non-Oracle system (such as Sybase, Informix, and Ingres), and extends Oracle9i Application Server to that system. While installing an Oracle Gateway, you must:

- install each gateway in its own Oracle home directory.
- install the gateway on the same machine as the non-Oracle database.

Source Path

You can install the Oracle Gateways from Oracle9i Application Server CD-ROM Disk 1. [Table C-1](#) lists the full paths to the `products.jar` file for each gateway. Enter this path in the Source field of the File Location Screen.

Table C-1 Oracle Gateway Source Path

Gateway Name	Path
Sybase	<code>mount_point/9ias_1021_Supplemental_Disk1/GW_SYBASE/Disk1/stage/products.jar</code>
Informix	<code>mount_point/9ias_1021_Supplemental_Disk1/GW_INFORMIX/Disk1/stage/products.jar</code>
Ingres	<code>mount_point/9ias_1021_Supplemental_Disk1/GW_INGRES/Disk1/stage/products.jar</code>

Oracle Internet Directory

Oracle Internet Directory is a general purpose directory service that stores information about users and network resources. It enables retrieval of information about dispersed users and network resources. It combines Lightweight Directory Access Protocol (LDAP), the open Internet standard directory access protocol, with the high performance, scalability, robustness, and availability of the Oracle9i Application Server.

Source Path

You can install Oracle Internet Directory from Oracle9i Application Server CD-ROM Disk 2. The following is the full path to the `products.jar` file for Oracle Internet Directory. Enter this path in the Source field of the File Locations Screen.

`mount_point/9ias_1021_Supplemental_Disk2/OID/Disk1/stage/products.jar`

Oracle Workflow

Oracle Workflow is a business process modeling and automation tool that enables users to route information, create and change business processes, deliver electronic notifications, and integrate systems based on business events. It enables you to define and continuously improve your business processes using a drag-and-drop process designer, extend the reach of business process automation throughout the enterprise and beyond to include any e-mail or Internet user, and set up subscriptions to business events which can launch workflows or enable messages to be propagated from one system to another when business events occur.

Source Path

You can install Oracle Workflow from Oracle9i Application Server CD-ROM Disk 2. The following is the full path to the `products.jar` file for Oracle Workflow. Enter this path in the `Source` field of the File Locations Screen.

```
mount_point/9ias_1021_Supplemental_Disk2/WF/Disk1/stage/products.jar
```

Oracle9iAS Email

Oracle9iAS Email is an integrated solution for messaging and directory services. Users can send messages to anyone on the network with any IMAP4 or POP-3 compliant client. The Oracle9iAS Email database contains information about users, rooms, and equipment that you can organize by domain. Oracle9iAS Email provides tools to help you perform most administration tasks, including managing processes, directory entries, and databases. You can also use monitor tests and server process logs to monitor the system for potential problems.

Source Path

You can install Oracle9iAS Email from Oracle9i Application Server CD-ROM Disk 2. The following is the full path to the `products.jar` file for Oracle9iAS Email. Enter this path in the `Source` field of the File Locations Screen.

```
mount_point/9ias_1021_Supplemental_Disk2/EMAILSERVER/Disk1/stage/products.jar
```

Oracle9iAS Unified Messaging

Oracle9iAS Unified Messaging is a highly scalable messaging framework that integrates messages from multiple sources into a single box. Oracle9iAS Unified Messaging not only consolidates all messages into a single interface, it also frees the business professional to focus on making decisions, rather than on keeping track of multiple telephone numbers, passwords, and access codes. It integrates messages from multiple sources into a single “inbox.”

Source Path

You can install Oracle9iAS Unified Messaging from Oracle9i Application Server CD-ROM Disk 2. The following is the full path to the `products.jar` file for Oracle9iAS Unified Messaging. Enter this path in the `Source` field of the File Locations Screen.

```
mount_point/9ias_1021_Supplemental_Disk2/UM/Disk1/stage/products.jar
```

Oracle Applications Interconnect

Oracle Applications Interconnect is a comprehensive application integration framework that enables seamless integration of enterprise software. It is built on top of Oracle's robust integration platform and leverages its underlying services. It is designed to integrate heterogeneous systems, be it Oracle Applications, non-Oracle applications, or 3-party messaging oriented middleware (MOM). This integration can be deployed either within an enterprise or across enterprise boundaries through the Internet. In addition, Oracle Applications Interconnect provides a tool (iStudio) for modeling the data in the integration scenario. iStudio eliminates the need for “hardwired” or “hardcoded” integration. Users define their integration using iStudio which minimizes the need to write any code for the integration.

Source Path

You can install Oracle Applications Interconnect from Oracle9i Application Server CD-ROM Disk 2. The following is the full path to the `products.jar` file for Oracle Applications Interconnect. Enter this path in the `Source` field of the File Locations Screen.

```
mount_point/9ias_1021_Supplemental_Disk2/OAI/Disk1/stage/products.jar
```

Enabling SSL for Oracle HTTP Server

This appendix describes the method of enabling SSL for Oracle HTTP Server. The following topics guide you through the necessary steps:

- [Generate the Certification Request](#)
- [Modify httpd.conf File to Enable SSL](#)

Generate the Certification Request

Perform the following steps to generate a certificate request:

1. Use the commands below to generate the certification request:

```
.../Apache/bin/openssl md5 *>rand.dat
.../Apache/bin/openssl genrsa -rand rand.dat -des3 1024>key.pem
.../Apache/bin/openssl req -new -key key.pem -out csr.pem -config
./openssl.cnf
```

When you run the final command, a certificate request is generated. The following is an example of a certification request:

```
Country Name (2 letter code) [AU]: US
State or Province Name (full name)[Some-State]: California
Locality name (eg, city) []: Redwood Shores
Organization Name (eg, company) [Internet Widgits Pty Ltd]: Oracle
Organizational Unit Name (eg, section) []: EITQA
Common Name (eg, YOUR name) []: machine.us.oracle.com
Email Address []: username@oracle.com
```

Please enter the following “extra” attributes to be sent with your certification request:

```
A challenge password []:
An optional company name []:
```

Be sure to take note of the following:

- These commands create two files: `key.pem` and `csr.pem` (certificate request).
 - For Common Name, include the FULL name of the HOST and DOMAIN you are running the command on.
 - Remember the password you enter. This password is used every time Oracle HTTP Server is started.
2. Send the Certification Request. In the CSR area, paste the certification request from `csr.pem` file.
 3. When you receive the certificate, paste it into a file named `portalcert.crt`.

Be sure that you get the Root Trial CA certificate by going to the URL mentioned in the Certificate Authority email. Export that certificate from the browser to a file named `rootcacert.crt`.

4. Copy the following in appropriate directories:

- Certificate file `portalcert.crt` into the `.../Apache/Apache/conf/ssl.crt` directory.
- `key.pem` file into the `.../Apache/Apache/conf/ssl.key` directory.
- Root Trial CA file `rootcacert.crt` into the `.../Apache/Apache/conf/ssl.crt` directory.

Modify `httpd.conf` File to Enable SSL

Make the following changes to the `httpd.conf` file to enable SSL:

1. **Port changes:** Be sure your entries are similar to the ones in the example below:

```
#
# This port is used when starting without SSL
Port 7777
# This port is used when starting with SSL
<IfDefine SSL>
Port 7777
Port 7788
</IfDefine>

##
##SSL Support
##
##When we also provide SSL we have to listen to the standard HTTP port
##(see above) abd to the HTTPS port
##
<IfDefine SSL>
Listen 7777
Listen 7788
</IfDefine>

##
##SSL Virtual Host Context
##

<VirtualHost_default_:7788>
```

-
- 2. SSL Certificate related entries:** To configure the `httpd.conf` file to your certificate, search for `SSLCertificateFile` and make this entry as below pointing to your certificate that came from the certificate authority. This is illustrated in the following example:

```
SSLCertificateFile .../Apache/Apache/conf/ssl.crt/portalcert.crt

Entry for Server Private Key

SSLCertificateKeyFile .../Apache/Apache/conf/ssl.key/key.pem

Entry for Server Certificate Chain: (The Root Trial CA Certificate)

SSLCertificateChainFile .../Apache/Apache/conf/ssl.crt/rootcacert.crt

Entry for Certificate Authority (CA): as below

#Certificate Authority (CA):
#Set the CA certificate verification path where to find CA
#certificates for client authentication or alternatively one
#huge file containing all of this (file must be PEM encoded).
#Note: Inside SSLCACertificatePath you need hash symlinks
#to point to the certificate files. Use the provided
#Makefile to update the hash symlinks after changes.
#SSLCACertificateFile conf/ssl.crt/ca-bundle.crt
SSLCACertificateFile conf/ssl.crt
SSLCACertificateFile conf/ssl.crt/rootcacert.crt
```

- 3. Restart Oracle HTTP Server.**

For information on enabling SSL for Oracle9iAS Portal, refer to *Oracle Portal 3.0.8 Configuration Guide*.

Installing Documentation Library

The Oracle9i Application Server Documentation Library CD-ROM contains the documentation set for this product. The documentation on the CD-ROM is available in both HTML and PDF formats. The following topics describe the contents of the CD-ROM, and provides instructions for installing and viewing the documentation:

- [Documentation Library Titles](#)
- [Installing the Documentation Library](#)
- [Viewing the Documentation Library](#)

Documentation Library Titles

The Documentation Library CD-ROM contains the documentation listed in the tables on the following pages. Titles that have a part number are available as printed and bound manuals from the Oracle Store at

<http://store.oracle.com>

Table E-1 *Oracle9i Application Server*

Part Number	Title
NA	Quick Tour
A87353-01	Overview Guide
A83709-05	Migrating from Oracle Application Server

Table E-2 *Communication Services*

Part Number	Title
NA	Apache 1.3.12 User's Guide
NA	Apache JServ Documentation (<i>links to http://java.apache.org/jserv</i>)
NA	Apache mod_perl Documentation (<i>links to http://perl.apache.org</i>)
NA	mod_ssl Documentation (<i>links to http://www.modssl.org</i>)
NA	OpenSSL Documentation (<i>links to http://www.openssl.org</i>)
A87562-01	Using the PL/SQL Gateway
A83720-01	Oracle8i Servlet Engine User's Guide
A87355-01	Oracle Plug-in for Microsoft IIS Configuration and User's Guide

Table E–3 Content Management Services

Part Number	Title
NA	Oracle Internet File System Quick Tour
A81197-05	Oracle Internet File System Setup and Administration Guide
A75154-04	Oracle Internet File System User's Guide
A75172-04	Oracle Internet File System Developer's Guide
NA	Oracle Internet File System Class Reference
NA	Oracle Internet File System Java Reference API
NA	Oracle Internet File System XML Reference

Table E–4 Business Logic Services

Part Number	Title
NA	Oracle Business Components for Java Developing Business Components
NA	Oracle Business Components for Java Tutorial - Building BC4J
NA	Oracle Business Components for Java Reference API
A83728-01	Oracle8i Java Developer's Guide
A81358-01	Oracle8i Java Stored Procedures Developer's Guide
A83720-011	Oracle8i Servlet Engine User's Guide
A83726-01	Oracle JavaServer Pages Developer's Guide and Reference
A83725-01	Oracle8i Enterprise JavaBeans Developer's Guide and Reference
A88705-01	Deploying Enterprise JavaBeans to Oracle9i Application Server
A83722-01	Oracle8i CORBA Developer's Guide and Reference
A83724-01	Oracle8i JDBC Developer's Guide and Reference
A83723-01	Oracle8i SQLJ Developer's Guide and Reference
A81357-01	Oracle8i JPublisher User's Guide
A85456-01	Oracle8i Supplied Java Packages Reference
A83727-01	Oracle8i Java Tools Reference

Table E–4 Business Logic Services (Cont.)

Part Number	Title
NA	Forms Developer Quick Tour
A86202-01	Deploying Forms Applications to the Web
A73074-01	Form Builder Reference Manual
A73073-02	Guidelines for Building Applications
A73075-01	Graphics Builder Reference Manual
A73076-01	Procedure Builder Reference Manual
A73152-01	Common Built-in Packages Reference Manual

Table E–5 Presentation Services

Part Number	Title
NA	Apache JServ Documentation (<i>links to http://java.apache.org/jserv</i>)
A83726-01	Oracle JSP Developer's Guide and Reference
NA	Oracle JSP Developer's Toolkit

Table E–6 Developer's Kits

Part Number	Title
A86030-01	Oracle8i Application Developer's Guide - XML
A83730-01	Oracle8i XML Reference Guide
A83723-01	Oracle8i SQLJ Developer's Guide and Reference
A83724-01	Oracle8i JDBC Developer's Guide and Reference
A86082-01	Oracle Internet Directory Application Developer's Guide

Table E–7 Portal Services

Part Number	Title
NA	Oracle9iAS Portal Quick Tour
A87567-01	Oracle9iAS Portal Tutorial
A87566-01	Oracle9iAS Portal Configuration Guide
A87570-01	Oracle9iAS Portal Building Portals
A86701-01	Oracle9iAS Wireless Configuration Guide
A86700-01	Oracle9iAS Wireless Developer's Guide
A86699-01	Oracle9iAS Wireless Implementation Guide

Table E–8 Caching Services

Part Number	Title
A86722-02	Oracle9iAS Web Cache Administration and Deployment Guide
NA	Oracle9iAS Database Cache Quick Tour
A88706-01	Oracle9iAS Database Cache Concepts and Administration Guide

Table E–9 System Services

Part Number	Title
NA	Oracle Enterprise Manager Console Quick Tour
NA	Standard Management Pack Quick Tour
A85250-01	Oracle Enterprise Manager Concepts Guide
A85247-01	Oracle Enterprise Manager Configuration Guide
A85248-01	Oracle Enterprise Manager Administrator's Guide
A85251-01	Oracle Intelligent Agent User's Guide
A85245-01	Oracle Enterprise Manager Messages Manual
A85249-01	Oracle SNMP Support Reference Guide

Table E–10 *Business Intelligence Services*

Part Number	Title
A87572-01	Oracle9iAS Discoverer Configuration Guide for UNIX
A87430-01	Oracle9iAS Discoverer Configuration Guide for Windows
NA	Reports Developer Quick Tour
A86784-02	Publishing Reports to the Web
A73172-01	Building Reports
A73174-01	Reports Developer Reference Manual
A73073-02	Guidelines for Building Applications
A73075-01	Graphics Builder Reference Manual
A73076-01	Procedure Builder Reference Manual
A73152-01	Common Built-in Packages Reference Manual

Table E–11 *New Services for Release 1.0.2.1*

Part Number	Title
A88729-01	Using Transparent Gateways with Oracle9i Application Server
A88714-01	Oracle Heterogeneous Services
A86101-01	Oracle Internet Directory Administrator's Guide
A86082-01	Oracle Internet Directory Application Developer's Guide
A87449-01	Oracle Workflow Guide
A86653-01	Oracle9iAS Email Server Administrator's Guide
A86650-01	Oracle9iAS Email Server Developer's Guide
A86093-02	Oracle9iAS Unified Messaging Developer's Guide
A86660-01	Oracle Applications InterConnect User's Guide
A65435-01	Oracle Message Broker Administration Guide

Installing the Documentation Library

You can install the documentation on the CD-ROM in either of two ways:

- Copying the files from the CD-ROM to your local system.
- Using the Oracle Universal Installer included with Oracle9i Application Server.

File Copy Installation

The simplest installation method is to directly copy the files from the CD-ROM to your computer. Use your operating system's commands to copy the contents of the `doc` directory on the CD-ROM to the appropriate installation directory on your system. For consistency with installations performed by the Oracle Universal Installer, Oracle recommends that you name the directory `doc`.

For example, the following command copies the documentation from the CD-ROM to your Oracle home directory.

For UNIX, enter the following command:

```
prompt> cp -r mount_point/doc $ORACLE_HOME
```

For Windows, enter the following command at the command prompt:

```
prompt> xcopy /s cdrom_drive\doc %ORACLE_HOME%
```

Note: This method may overwrite files if the destination directory already exists.

Oracle Universal Installer Installation

The Oracle Universal Installer also installs the documentation onto your computer from the CD-ROM. The following instructions describe the process:

1. Launch the Oracle Universal Installer.

See Also: ["Starting Oracle Universal Installer"](#) on page 2-28

2. At the Welcome screen, click **Next**.

3. At the File Locations screen do the following:
 - a. Eject the Oracle9i Application Server CD-ROM and replace it with the Documentation Library CD-ROM.
 - b. In the Source field,
For UNIX, enter `mount_point/stage/products.jar`.
For Windows, enter `cdrom-drive\stage\products.jar`.
This directs the installer to the installation file for the documentation library.
 - c. In the Destination field, enter the path to the Oracle home you are installing the documentation to. The documentation will be installed in the `doc` directory under Oracle home.
 - d. Click **Next** to continue.
4. At the Summary screen, review the summary and click **Install** to begin the installation process.
5. After installation, the End of Installation screen will appear. Click **Exit** to quit the installer.

Viewing the Documentation Library

You can view the Oracle9i Application Server documentation library directly from the CD-ROM or from disk after installing it. For information about the tools necessary to view the documentation, refer to "[Online Documentation Requirements](#)" on page 1-5.

To view the HTML and PDF documentation from a local installation or from the CD-ROM, follow these steps:

1. Use your browser to open the top-level `index.htm` file from the `doc` directory on either the CD-ROM or Oracle home directory.
2. Click on the list of components to see the documentation relating to a particular component.

Using the Oracle Information Navigator Applet

Oracle Information Navigator is a Java-based search and navigation utility provided with Oracle online documentation. If you are using a Java-enabled browser, the navigator is launched automatically when you open `index.htm` in a browser. The navigator can be used with Oracle documentation, whether you are reading from the CD-ROM or from installed files.

For information on how to use the navigator, click the **Help** button in the top right corner of the browser window.

Bypassing the Oracle Information Navigator Applet

If you do not wish to launch the Oracle Information Navigator applet, open `products.htm` instead of `index.htm`.

Index

A

Additional, 3-30
additional documentation, 3-30, 4-37, 5-45
Apache listener configuration (DAD and schema name) screen, 3-14, 4-15, 5-15
 Portal DAD name, 3-14, 4-15, 5-15
 Portal schema name, 3-15, 4-16, 5-16
 TNS connect string, 3-15, 4-16, 5-16
Apache listener configuration (login server) screen, 3-16, 4-17, 5-17
 login server DAD name, 3-16, 4-17, 5-17
 login server schema name, 3-16, 4-17, 5-17
 TNS connect string, 3-16, 4-17, 5-17
available disk space
 component locations screen, 3-10, 4-10, 5-10

B

Bourne shell
 DISPLAY, 2-10
 ORACLE_HOME, 2-9
 TMP, 2-10
buttons
 about Oracle Universal Installer, 3-2, 4-2, 5-2
 browse, 3-5, 4-5, 4-20, 5-5
 cancel, 3-22, 4-26, 5-24, 7-10
 change location, 3-10, 4-10, 5-10
 close, 7-7
 deinstall products, 3-2, 4-2, 5-2, 7-6
 destination location, 3-10, 4-10, 5-10
 exit, 3-2, 4-2, 5-2
 help, 3-2, 4-2, 5-2, 7-7, 7-9
 installed products, 3-2, 4-2, 5-2, 7-6

location, 7-7
next, 3-3, 4-3, 5-3
no, 7-9
previous, 3-3, 4-3, 5-3
release information, 3-27, 4-32, 5-31
remove, 7-7
retry, 3-26, 4-30, 5-29
save as, 7-7
stop, 3-26, 4-30, 5-29
yes, 7-9

C

C shell
 DISPLAY, 2-10
 ORACLE_HOME, 2-9
 TMP, 2-10
certificate request, D-2
certified software requirements, 1-3
changing
 disks, 3-23, 4-27, 5-26
component configuration and startup screen, 3-13, 4-13, 5-13
component locations screen, 3-9, 4-9, 5-9
 available disk space, 3-10, 4-10, 5-10
 required disk space, 3-10, 4-10, 5-10
 show available volumes, 3-10, 4-10, 5-10
 total required disk space, 3-10, 4-10, 5-10
component port number, 3-30, 4-36, 5-44
 Load Balancer Client, 5-44
 Load Balancer Server, 5-44
 Oracle Enterprise Java Engine TNS listener, 4-36, 5-44

- Oracle HTTP Server, 3-30, 4-36, 5-43, 5-44
- Oracle HTTP Server (SSL-enabled), 3-30, 4-36, 5-44
- Oracle HTTP Server Jserv Servlet Engine, 3-30, 4-36, 5-44
- Oracle Internet File System, 4-36, 5-44
- Oracle Management Server, 5-44
- Oracle9iAS administration, 5-44
- Oracle9iAS Database Cache, 5-44
- Oracle9iAS Database Cache data, 5-44
- Oracle9iAS Database Cache TNS listener, 5-44
- Oracle9iAS Discoverer, 5-44
- Oracle9iAS Forms Services, 5-44
- Oracle9iAS Portal, 3-30, 4-36, 5-44
- Oracle9iAS Reports Services, 5-44
- Oracle9iAS statistics port, 5-44
- Oracle9iAS Web Cache, 5-44
- Oracle9iAS Web Cache invalidation, 5-44
- Oracle9iAS Wireless, 3-30, 4-36, 5-44
- Oracle9iAS Wireless Web Integration Server, 3-30, 4-36, 5-44
- component web site, 3-29, 4-36
 - Oracle HTTP Server, 3-29, 4-36
 - Oracle HTTP Server (SSL-enabled), 3-29, 4-36, 5-43
 - Oracle Internet File System, 4-36, 5-43
 - Oracle Management Server, 5-43
 - Oracle9iAS Discoverer, 5-43
 - Oracle9iAS Forms Services, 5-43
 - Oracle9iAS Portal, 3-29, 4-36
 - Oracle9iAS Reports Services, 5-43
 - Oracle9iAS Web Cache, 5-43
 - Oracle9iAS Wireless Web Integration Server, 3-29, 4-36, 5-43
- component-specific tasks
 - Oracle Internet File System, 5-34
 - Oracle Management Server, 5-34
 - Oracle9iAS Database Cache, 5-35
- configuration assistants
 - Oracle Database, 4-30, A-17
 - Oracle Database Configuration Assistant, A-17
 - Oracle Internet File System, 4-34, 5-34, A-17, A-18
 - Oracle Management Server Configuration Assistant, A-33

- Oracle9i Database Cache, A-3
- Oracle9iAS Portal, 3-26, A-8
- configuration tools, 5-29, A-1
- configuration tools screen, 3-25, 4-29, 5-28
- configuring
 - external procedures listener, 2-22
 - sqlnet.ora, 2-24
 - Web Integration Developer, B-3
- confirmation screen, 7-9
- CPU, 1-2
 - Oracle9iAS Wireless Edition Client, 1-4
- creating
 - password file, 2-21
 - UNIX group name, 2-12

D

- database administrator group
 - privileged operating system groups screen, 4-14
- database file location screen, 4-20
 - directory of database files, 4-20
- database identification screen, 4-18
 - global database name, 4-18
 - SID, 4-19
- database operator group
 - privileged operating system groups screen, 4-14
- database remote access, 2-20
- deinstallation, 7-1, 7-2
 - confirmation screen, 7-9
 - Oracle9iAS Database Cache, 7-5
 - Oracle9iAS Discoverer, 7-2
 - using Oracle Installer, 7-2
 - using Oracle Universal Installer, 7-6
- deinstallation progress bar screen, 7-5
- destination
 - file locations screen, E-8
- directories
 - cdrom/9ias_1021_disk1, 2-28
 - doc, E-7
 - /tmp, 2-10
- directory of database files
 - database file location screen, 4-20
- Discoverer Server installation options screen, 7-3

- disk space, 1-2
 - online documentation, 1-5
 - Oracle9iAS Wireless Edition Client, 1-4
- disks
 - changing, 3-23, 4-27, 5-26
- DISPLAY, 2-10
- documentation library
 - installation, E-1
 - file copy installation, E-7
 - Oracle Universal Installer, E-7
 - installation options, E-7
 - titles, E-2
 - business intelligence services, E-6
 - business logic services, E-3
 - caching services, E-5
 - communication services, E-2
 - content management services, E-3
 - developer's kit, E-4
 - Oracle9i Application Server, E-2
 - portal services, E-5
 - presentation services, E-4
 - system services, E-5
 - viewing, E-8

E

- editing
 - initSID.ora, 2-20
 - listener.ora, 2-22
 - tnsnames.ora, 2-22
- end of installation screen, 3-27, 4-32, 5-31
- Enterprise Edition, 5-1
 - installation, 5-1, 5-2
 - postinstallation, 5-32
 - additional documentation, 5-45
 - component port number, 5-44
 - component port numbers, 5-44
 - component-specific tasks, 5-34
 - environment scripts, 5-33
 - Oracle Management Server, 5-34
 - starting and stopping component, 5-42
 - starting and stopping components, 5-42
- preinstallation, 2-19
 - origin database connectivity, 2-26
- response file, 6-2

- environment scripts
 - Oracle Internet File System, 4-34, 5-33
 - Oracle Management Server, 5-33
 - Oracle9iAS Database Cache, 5-33
 - Oracle9iAS Discoverer, 5-33
 - Oracle9iAS Forms Services, 5-33
 - Oracle9iAS Reports Services, 5-33
 - Oracle9iAS Web Cache, 5-33
- Error, 6-3
- EXCLUSIVE parameter
 - password file, 2-20

F

- file copy installation, E-7
- file locations screen, 3-4, 4-4, 5-4
 - destination, 3-4, 4-4, 5-4, E-8
 - source, 3-4, 4-4, 5-4, E-8
- files
 - httpd.conf, D-3
 - initSID.ora, 2-19
 - installation logs, 6-3
 - listener.ora, 2-19, 2-22
 - orapwSID, 2-19
 - silentInstall.log, 6-3
 - sqlnet.ora, 2-24
 - tnsnames.ora, 2-19, 2-22

G

- global database name
 - database identification screen, 4-18

H

- hardware requirements, 1-2
 - CPU, 1-2
 - disk space, 1-2
 - memory, 1-2
 - TMP/swap space, 1-2

I

- initSID.ora, 2-19, 2-20
- install screen, 3-22, 4-26, 5-24
- installActions.log, 6-3
- installation
 - documentation library, E-1
 - Enterprise Edition, 5-1
 - non-interactive, 6-1
 - log files, 6-3
 - Oracle9iAS Discoverer, 5-25
 - Standard Edition, 4-1
- installation log files, 2-27
- installation options
 - documentation library, E-7
- installation types screen, 3-8, 4-8, 5-8
- Installing, B-1
- insufficient space in TMP screen, 5-11
- insufficient swap space for install screen, 3-11, 4-11
- inventory screen, 7-7

J

- jdk
 - Oracle9iAS Wireless Edition Client, 1-4

K

- Korn shell
 - DISPLAY, 2-10
 - ORACLE_HOME, 2-9
 - TMP, 2-10

L

- listener.ora, 2-19, 2-22
- login server DAD name, 3-16, 4-17, 5-17
- login server schema name, 3-16, 4-17, 5-17

M

- memory, 1-2
 - Oracle9iAS Wireless Edition Client, 1-4
- migration, 2-13
- Minimal, 3-1

- Minimal Edition, 3-1
 - installation, 3-2
 - postinstallation, 3-28
 - additional documentation, 3-30
 - component port number, 3-30
 - component web site, 3-29
 - starting and stopping component, 3-29
 - preinstallation, 2-15
 - response file, 6-2
- multi-thread server configuration
 - CORBA applications, 5-41
 - Enterprise Java Beans, 5-41
 - Oracle Servlets Engine for Java, 5-40
- multi-threaded server configuration, 5-40
 - distributed CORBA applications and enterprise javabeans, 5-41
 - Oracle Servlets Engine for java, 5-40

N

- Net8 Configuration Assistant, 3-26, 4-30
- Non, 6-1
- non-interactive
 - installation, 6-1
- non-interactive installation, 6-1
 - error handling, 6-3
 - introduction, 6-2
 - requirements, 6-2

O

- oinstall group
 - UNIX group name, 2-11
- online documentation
 - disk space, 1-5
 - online format, 1-5
 - HTML, 1-5
 - PDF, 1-5
 - requirements, 1-5
- operating system
 - Oracle9iAS Wireless Edition Client, 1-4
 - software requirements, 1-3
- Oracle, 2-6

- oracle account
 - UNIX account, 2-11
- Oracle Advanced Security, 2-5
- Oracle Business Components for Java, 2-5
- Oracle Database Client Developer Kit, 2-5
- Oracle Database Configuration Assistant, 4-30, A-17
- Oracle Enterprise Java Engine, 2-5
- Oracle Enterprise Manager Client, 2-6, B-4
 - DBA Management Pack, B-4
 - installation, B-4
 - Oracle Enterprise Manager Console, B-4
- Oracle home location screen, 7-2
- Oracle HTTP Server, 2-6
- Oracle HTTP Server (SSL)
 - port numbers, 3-30, 4-36
- Oracle Information Navigator Applet, E-9
 - bypassing, E-9
 - using, E-9
- Oracle Internet File System, 2-6
 - preinstallation, 2-16, 2-24
- Oracle Internet File System Configuration Assistant, 4-34, 5-34, A-17, A-18
- Oracle LDAP Developer's Kit, 2-6
- Oracle Management Server, 2-7
- Oracle Management Server Configuration Assistant, A-33
- Oracle Universal Installer, 2-27, 2-28
 - mounting
 - CD-ROM, 2-28
 - manually, 2-28
 - overview, 2-27
 - starting, 2-28
 - UNIX group name, 2-11
- Oracle XML Developer Kit, 2-7
- ORACLE_HOME, 2-8
 - Bourne shell, 2-9
 - C shell, 2-9
 - Korn shell, 2-9
 - preventing conflicts, 2-9
- ORACLE_SID, 2-19
- Oracle9i Application Server
 - components, 2-2
 - Oracle Advanced Security, 2-5
 - Oracle Business Components for Java, 2-5
 - Oracle Database Client Developer Kit, 2-5
 - Oracle Enterprise Java Engine, 2-5
 - Oracle Enterprise Manager Client, 2-6
 - Oracle HTTP Server, 2-6
 - Oracle Internet File System, 2-6
 - Oracle LDAP Developer's Kit, 2-6
 - Oracle Management Server, 2-7
 - Oracle XML Developer Kit, 2-7
 - Oracle9iAS Database Cache, 2-3
 - Oracle9iAS Discoverer, 2-3
 - Oracle9iAS Forms Services, 2-4
 - Oracle9iAS Portal, 2-4
 - Oracle9iAS Reports Services, 2-4
 - Oracle9iAS Web Cache, 2-4
 - Oracle9iAS Wireless, 2-5
 - deinstallation, 7-1
 - disk space, 1-2
 - install options
 - Enterprise Edition, 2-2
 - Minimal Edition, 2-2
 - Standard Edition, 2-2
 - overview, 2-2
 - preinstallation tasks, 2-8
 - reinstallation, 7-1, 7-11
 - supplemental components, 2-7
- Oracle9i Application Server Administrative and Development Client CD-ROM
 - installation, B-1
- Oracle9i Application Server Wireless Edition Client, B-2
 - installation, B-3
 - Service Designer, B-2
 - Web Integration Developer, B-2
- Oracle9i Database Cache Configuration Assistant, A-3
- Oracle9iAS, 3-26, 4-31, 5-29, 5-30, A-3, A-8
- Oracle9iAS Database Cache, 2-3
 - preinstallation, 2-19
 - database remote access, 2-20
 - external procedures listener, 2-22
 - synchronize database with its SID, 2-19
- Oracle9iAS Database Cache Configuration Assistant, 5-29
 - password, A-5
 - user name, A-5

- Oracle9iAS Discoverer, 2-3
 - installation, 5-25
- Oracle9iAS Discoverer installation screen, 5-25
- Oracle9iAS Discoverer Plus, 2-3
- Oracle9iAS Discoverer Viewer, 2-4
- Oracle9iAS Forms Services, 2-4
- Oracle9iAS Portal, 2-4
- Oracle9iAS Portal Configuration Assistant, 3-26, 4-31, 5-30, A-8
- Oracle9iAS Reports Services, 2-4
- Oracle9iAS Web Cache, 2-4
 - memory, 1-2
 - preinstallation, 2-19
- Oracle9iAS Web Cache Configuration Assistant, 5-29
- Oracle9iAS Wireless, 2-5
- Oracle9iAS Wireless Edition Client
 - CPU, 1-4
 - disk space, 1-4
 - jdk, 1-4
 - memory, 1-4
 - operating system, 1-4
 - requirements, 1-4
- oraInventory directory, 2-27
 - location, 2-27
 - UNIX group name, 2-11
- orapwd utility, 2-21
- orapwSID, 2-19
- origin database, 2-18, 2-26
 - name, 2-19
 - remote access, 2-20
- origin database connection information
 - screen, 5-14
 - host name, 5-14
 - port number, 5-14
 - service name, 5-14
- origin database connectivity, 2-18, 2-26
- origin database user information screen, 5-18
 - password, 5-18
 - user name, 5-18
- OSDBA, 2-12
- OSOPER, 2-12
- overview
 - Oracle Universal Installer, 2-27
 - Oracle9i Application Server, 2-2

P

- password file
 - creating, 2-21
 - entries, 2-21
 - EXCLUSIVE parameter, 2-20
 - file, 2-21
 - password, 2-21
 - SHARED parameter, 2-20
- port changes, 2-13
- port numbers
 - Oracle HTTP Server, 3-30, 4-36, 5-44
 - Oracle HTTP Server (SSL), 3-30, 4-36
- Portal DAD name, 3-14, 4-15, 5-15
- Portal schema name, 3-15, 4-16, 5-16
- preinstallation
 - creating
 - UNIX account, 2-11
 - UNIX group name, 2-11
 - Enterprise Edition, 2-19
 - Oracle9iAS Database Cache, 2-19
 - Oracle9iAS Web Cache, 2-19
 - environment variables, 2-8
 - DISPLAY, 2-10
 - TMP, 2-10
 - migration, 2-13
 - Minimal Edition, 2-15
 - port changes, 2-13
 - Standard Edition, 2-16
 - Oracle Internet File System, 2-16, 2-24
- privileged groups, 2-12
- privileged operating system groups screen, 4-14

R

- reinstallation, 7-1
 - Oracle9i Application Server, 7-11
- remote access
 - origin database, 2-20
- remove progress bar screen, 7-10
- required disk space
 - component locations screen, 3-10, 4-10, 5-10

- requirements
 - certified software, 1-3
 - hardware, 1-2
 - online documentation, 1-5
 - Oracle9iAS Wireless Edition Client, 1-4
 - software, 1-3
- response file
 - Enterprise Edition, 6-2
 - Minimal Edition, 6-2
 - setting, 6-2
 - specifying, 6-3
 - Standard Edition, 6-2
 - validating values, 6-4
- root.sh script, 3-24, 4-28, 5-27

S

screens

- Apache listener configuration (DAD and schema name), 3-14, 4-15, 5-15
- Apache listener configuration (login server), 3-16, 4-17, 5-17
- component configuration and startup, 3-13, 4-13, 5-13
- component locations, 3-9, 4-9, 5-9
- configuration tools, 3-25, 4-29, 5-28
- confirmation, 7-9
- database file location, 4-20
- database identification, 4-18
- deinstallation progress bar, 7-5
- Discoverer Server installation options, 7-3
- end of installation, 3-27, 4-32, 5-31, E-8
- file locations, 3-4, 4-4, 5-4, E-8
- install, 3-22, 4-26, 5-24
- installation
 - insufficient swap space for install, 3-11, 4-11
- installation types, 3-8, 4-8, 5-8
- insufficient space in TMP, 5-11
- inventory, 7-7
- Oracle home location, 7-2
- Oracle9iAS Discoverer installation, 5-25
- origin database connection information, 5-14
- origin database user information, 5-18
- privileged operating system groups, 4-14
- remove progress bar, 7-10

- software asset manager, 7-4
- summary, 3-21, 4-25, 5-23, E-8
- system password for Wireless Edition, 3-20, 4-24, 5-22
- UNIX group name, 3-6, 4-6, 5-6
- welcome, 3-2, 4-2, 5-2, 7-6, E-7
- Wireless Edition repository information, 3-17, 4-21, 5-19
- Wireless Edition schema information, 3-19, 4-23, 5-21
- Service, B-2
- setting
 - DISPLAY, 2-10
 - response file, 6-2
 - TMP, 2-10
- SHARED parameter
 - password file, 2-20
- show available volumes
 - component locations screen, 3-10, 4-10, 5-10
- SID, 2-19
 - database identification screen, 4-19
- silentInstall.log, 6-3
- software asset manager screen, 7-4
- software requirements, 1-3
 - operating system, 1-3
 - Solaris 2.6, 1-3
 - Solaris 2.7, 1-3
 - Solaris 2.8, 1-3
- source
 - file locations screen, E-8
- specifying
 - response file, 6-3
- sqlnet.ora, 2-24
- SSL authentication method configuration, 5-39
- distributed CORBA applications and enterprise
 - javabeans, 5-40
 - Oracle Servlets Engine for Java, 5-39
 - Oracle9iAS Database Cache, 5-39
- SSL configuration
 - CORBA applications, 5-40
 - Enterprise Java Beans, 5-40
 - Oracle Database Cache, 5-39
 - Oracle Servlets Engine for Java, 5-39

- SSL for Apache, D-1
 - certification request
 - generate, D-2
 - httpd.conf file
 - modify, D-3
- Standard Edition, 4-1
 - components
 - documentation, 4-37
 - installation, 4-1, 4-2
 - postinstallation, 4-33
 - additional documentation, 4-37
 - component port number, 4-36
 - component port numbers, 4-35
 - component web site, 4-36
 - component-specific tasks, 4-34
 - environment scripts, 4-34
 - environment variables, 3-29
 - starting and stopping component, 4-35
 - starting and stopping components, 4-35
 - preinstallation, 2-16
 - origin database connectivity, 2-18
 - response file, 6-2
- Starting, 3-29, 5-42
- starting, 2-28
 - Forms Server, 5-30
 - Oracle Universal Installer, 2-28
 - Oracle9i Discoverer Viewer Server, 5-30
 - Reports Server, 5-30
 - web server, 3-26, 4-31, 5-30
- starting and stopping component, 3-29, 4-35, 5-42
 - Oracle HTTP Server, 4-35, 5-42
 - Oracle HTTP Server (SSL-enabled), 3-29, 4-35, 5-42
 - Oracle Internet File System, 4-35, 5-42
 - Oracle Management Server, 5-42
 - Oracle9iAS Database Cache, 5-42
 - Oracle9iAS Discoverer, 5-42
 - Oracle9iAS Forms Services, 5-42
 - Oracle9iAS Reports Services, 5-42
 - Oracle9iAS Web Cache, 5-42
 - Oracle9iAS Wireless Web Integration Server, 5-42
- starting and stopping components, 4-35
 - Oracle HTTP Server, 3-29
 - Oracle9iAS Web Integration Server, 3-29, 4-35
- summary screen, 3-21, 4-25, 5-23

- supplemental components
 - installation, C-1
 - Oracle Applications Interconnect, C-5
 - Oracle Gateways, C-2
 - Oracle Internet Directory, C-3
 - Oracle Workflow, C-4
 - Oracle9iAS Unified Messaging, C-5
 - overview, C-2
- swap space, 1-2
- system password for Wireless Edition screen, 3-20, 4-24, 5-22
- system tablespace, 1-2

T

- tablespace
 - system, 1-2
 - user, 1-2
- TMP, 1-2, 2-10
- TNS connect string, 3-15, 3-16, 4-16, 4-17, 5-16, 5-17
- TNS_ADMIN, 2-9
- tnsnames.ora, 2-19
 - editing, 2-22
- total required disk space
 - component locations screen, 3-10, 4-10, 5-10

U

- UNIX account, 2-11
 - oracle account, 2-11
- UNIX group name, 2-11
 - admintool utility, 2-11
 - creating, 2-12
 - groupadd utility, 2-11
 - oinstall group, 2-11
 - oraInventory directory, 2-11
 - privileged groups, 2-12
- UNIX group name screen, 3-6, 5-6
- user tablespace, 1-2
- Username, 4-23
- using
 - Oracle Information Navigator Applet, E-9

V

validating values

 response file, 6-4

viewing

 documentation library, E-8

W

Web Integration Developer

 configuration, B-3

welcome screen, 3-2, 4-2, 5-2, 7-6

Wireless Edition repository information

 screen, 3-17, 4-21, 5-19

 hostname, 3-17, 4-21, 5-19

 port, 3-17, 4-21, 5-19

 SID, 3-18, 4-22, 5-20

Wireless Edition schema information screen, 3-19,
 4-23, 5-21

 password, 3-19, 4-23, 5-21

 username, 3-19, 4-23, 5-21

