

Oracle® Retail Merchandising

Batch Schedule

Release 12.0.11.2

August 2010

Copyright © 2010, Oracle. All rights reserved.

Primary Author: Nathan Young

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this software or related documentation is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation shall be subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License (December 2007). Oracle USA, Inc., 500 Oracle Parkway, Redwood City, CA 94065.

This software is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications which may create a risk of personal injury. If you use this software in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure the safe use of this software. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software in dangerous applications.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

This software and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

Value-Added Reseller (VAR) Language

Oracle Retail VAR Applications

The following restrictions and provisions only apply to the programs referred to in this section and licensed to you. You acknowledge that the programs may contain third party software (VAR applications) licensed to Oracle. Depending upon your product and its version number, the VAR applications may include:

(i) the software component known as **ACUMATE** developed and licensed by Lucent Technologies Inc. of Murray Hill, New Jersey, to Oracle and imbedded in the Oracle Retail Predictive Application Server – Enterprise Engine, Oracle Retail Category Management, Oracle Retail Item Planning, Oracle Retail Merchandise Financial Planning, Oracle Retail Advanced Inventory Planning, Oracle Retail Demand Forecasting, Oracle Retail Regular Price Optimization, Oracle Retail Size Profile Optimization, Oracle Retail Replenishment Optimization applications.

(ii) the **MicroStrategy** Components developed and licensed by MicroStrategy Services Corporation (MicroStrategy) of McLean, Virginia to Oracle and imbedded in the MicroStrategy for Oracle Retail Data Warehouse and MicroStrategy for Oracle Retail Planning & Optimization applications.

(iii) the **SeeBeyond** component developed and licensed by Sun Microsystems, Inc. (Sun) of Santa Clara, California, to Oracle and imbedded in the Oracle Retail Integration Bus application.

(iv) the **Wavelink** component developed and licensed by Wavelink Corporation (Wavelink) of Kirkland, Washington, to Oracle and imbedded in Oracle Retail Mobile Store Inventory Management.

(v) the software component known as **Crystal Enterprise Professional and/or Crystal Reports Professional** licensed by SAP and imbedded in Oracle Retail Store Inventory Management.

(vi) the software component known as **Access Via™** licensed by Access Via of Seattle, Washington, and imbedded in Oracle Retail Signs and Oracle Retail Labels and Tags.

(vii) the software component known as **Adobe Flex™** licensed by Adobe Systems Incorporated of San Jose, California, and imbedded in Oracle Retail Promotion Planning & Optimization application.

(viii) the software component known as **Style Report™** developed and licensed by InetSoft Technology Corp. of Piscataway, New Jersey, to Oracle and imbedded in the Oracle Retail Value Chain Collaboration application.

(ix) the software component known as **DataBeacon™** developed and licensed by Cognos Incorporated of Ottawa, Ontario, Canada, to Oracle and imbedded in the Oracle Retail Value Chain Collaboration application.

You acknowledge and confirm that Oracle grants you use of only the object code of the VAR Applications. Oracle will not deliver source code to the VAR Applications to you. Notwithstanding any other term or condition of the agreement and this ordering document, you shall not cause or permit alteration of any VAR Applications. For purposes of this section, “alteration” refers to all alterations, translations, upgrades, enhancements, customizations or modifications of all or any portion of the VAR Applications including all reconfigurations, reassembly or reverse assembly, re-engineering or reverse engineering and recompilations or reverse compilations of the VAR Applications or any derivatives of the VAR Applications. You acknowledge that it shall be a breach of the agreement to utilize the relationship, and/or confidential information of the VAR Applications for purposes of competitive discovery.

The VAR Applications contain trade secrets of Oracle and Oracle’s licensors and Customer shall not attempt, cause, or permit the alteration, decompilation, reverse engineering, disassembly or other reduction of the VAR Applications to a human perceivable form. Oracle reserves the right to replace, with functional equivalent software, any of the VAR Applications in future releases of the applicable program.

Contents

Send Us Your Comments	vii
Preface	ix
Audience	ix
Related Documents.....	ix
Customer Support.....	x
Review Patch Documentation.....	x
Oracle Retail Documentation on the Oracle Technology Network.....	x
Conventions.....	x
1 Introduction to Merchandising Batch Processing	1
Batch Processing.....	1
Types of Batch Programs	1
Batch Window	2
Batch Schedule and Phases.....	2
Merchandising Batch Schedule	3
Program List	3
Batch Schedule Diagram	5
RMS, ReIM, RTM Section	5
ReSA Section.....	6
RPM Section.....	6
Notations in the Batch Schedule Diagram.....	7
prepost Program	8
Modifications to the Batch Schedule	9
2 Program List	11
3 Batch Schedule Diagram	17
4 Interface Diagrams for RMS and RPAS	19
RMS Pre/Post Extract Diagrams	20
RMS Foundation Data Extract Diagrams	21
RMS Fact Data Extract Diagrams.....	23
RPAS-RMS Fact Load Diagram	24
5 Interface Diagrams for RMS and RDW	25
6 Interface Diagram for RPM and RDW	37
7 Interface Diagram for ReIM and RDW	39

Send Us Your Comments

Oracle Retail Merchandising, Batch Schedule, Release 12.0.11.2

Oracle welcomes customers' comments and suggestions on the quality and usefulness of this document.

Your feedback is important, and helps us to best meet your needs as a user of our products. For example:

- Are the implementation steps correct and complete?
- Did you understand the context of the procedures?
- Did you find any errors in the information?
- Does the structure of the information help you with your tasks?
- Do you need different information or graphics? If so, where, and in what format?
- Are the examples correct? Do you need more examples?

If you find any errors or have any other suggestions for improvement, then please tell us your name, the name of the company who has licensed our products, the title and part number of the documentation and the chapter, section, and page number (if available).

Note: Before sending us your comments, you might like to check that you have the latest version of the document and if any concerns are already addressed. To do this, access the new Applications Release Online Documentation CD available on My Oracle Support and www.oracle.com. It contains the most current Documentation Library plus all documents revised or released recently.

Send your comments to us using the electronic mail address: retail-doc_us@oracle.com

Please give your name, address, electronic mail address, and telephone number (optional).

If you need assistance with Oracle software, then please contact your support representative or Oracle Support Services.

If you require training or instruction in using Oracle software, then please contact your Oracle local office and inquire about our Oracle University offerings. A list of Oracle offices is available on our Web site at www.oracle.com.

Preface

This batch schedule document details the integrated cyclical processing schedules for the Oracle Retail Merchandising applications:

- Oracle Retail Merchandising System (RMS)
- Oracle Retail Invoice Matching (ReIM)
- Oracle Retail Price Management (RPM)
- Oracle Retail Sales Audit (ReSA)
- Oracle Retail Trade Management (RTM)
- Oracle Retail Allocation

Note: Although Oracle Retail Allocation is a Merchandising application, it is not represented in this batch schedule because it does not have any batch programs to run. All Allocation processing is online processing.

This guide describes the periodic and ad hoc phases of batch processing, as well as pre- and post-processing dependencies.

Audience

The audiences for this guide are as follows:

- Systems analysts and system operations personnel who need information about Merchandising processes, internally or in relation to systems across the enterprise
- Integrators and implementation staff who have the overall responsibility for implementing the Merchandising applications in their enterprise

Related Documents

For more information, see the following documents for the Oracle Retail Merchandising products:

- *Oracle Retail Merchandising System Operations Guide*
- *Oracle Retail Price Management Operations Guide*
- *Oracle Retail Invoice Matching Operations Guide*
- *Oracle Retail Data Warehouse Operations Guide*
- *Oracle Retail Predictive Application Server documentation*
- *Oracle Retail Demand Forecasting documentation*

Customer Support

To contact Oracle Customer Support, access My Oracle Support at the following URL:
<https://support.oracle.com>

When contacting Customer Support, please provide the following:

- Product version and program/module name
- Functional and technical description of the problem (include business impact)
- Detailed step-by-step instructions to re-create
- Exact error message received
- Screen shots of each step you take

Review Patch Documentation

When you install the application for the first time, you install either a base release (for example, 12.1) or a later patch release (for example, 12.1.2). If you are installing the base release and additional patch and bundled hot fix releases, read the documentation for all releases that have occurred since the base release before you begin installation. Documentation for patch and bundled hot fix releases can contain critical information related to the base release, as well as information about code changes since the base release.

Oracle Retail Documentation on the Oracle Technology Network

Documentation is packaged with each Oracle Retail product release. Oracle Retail product documentation is also available on the following Web site:

http://www.oracle.com/technology/documentation/oracle_retail.html

(Data Model documents are not available through Oracle Technology Network. These documents are packaged with released code, or you can obtain them through My Oracle Support.)

Documentation should be available on this Web site within a month after a product release.

Conventions

Navigate: This is a navigate statement. It tells you how to get to the start of the procedure and ends with a screen shot of the starting point and the statement “the Window Name window opens.”

This is a code sample

It is used to display examples of code

Introduction to Merchandising Batch Processing

This chapter is a brief introduction to Oracle Retail batch processing. It defines basic terms and concepts, describes batch processing phases, and explains how to interpret the batch schedule diagram and program list.

Batch Processing

Batch processing is the execution of a group of batch programs (jobs). The results are returned without user intervention. Batch programs are commonly used for the following reasons:

- To process large volumes of transaction data
- To interface with external systems
- To perform internal maintenance

Batch programs can process very large quantities of data quickly and efficiently. Batch programs can perform some updates that could be performed through online transactions, but much more quickly and with less impact on system performance. Batch processing is usually scheduled for times when systems are idle or least busy.

Batch programs can be run automatically using batch scheduler software. The batch scheduler allows batch jobs to be set up in a specific order, with restrictions attached to any program as needed. If an error occurs with a batch program, an administrator must correct the error and manually rerun the batch program that failed.

Types of Batch Programs

Oracle Retail batch programs are of several types:

- Upload programs bring data from external systems into the Oracle Retail database. For example, the `posupld` program uploads daily transactions that occur at the point of sale (POS) for processing by the Oracle Retail Management System (RMS).
- Download programs extract data from RMS and format it so it can be used by external systems. For example, the `posdnld` program extracts new and changed information about an item/location for downloading to the point of sale.
- System maintenance programs perform tasks such as updating the system date. For example, the `dtesys` program increments the system date at the end of each batch cycle.
- Functional maintenance programs process data specific to a functional area. For example, the `storeadd` program updates a number of tables to create entries for a new store.

Batch Window

Because of the impact on production systems, it is not always possible to run batch programs during business hours; however, there is a window of opportunity during each day or night when online systems are not being used. This time frame is the *batch window*. For example, a retailer with stores throughout the continental U.S. might require its online systems to be available from 8 AM Eastern Standard Time, when its East Coast offices open, until 9 PM Pacific Standard Time, when its West Coast stores close. This allows an eight-hour batch window for processing all batch jobs.

Batch Schedule and Phases

Order is critical when running batch programs. Some tasks need to be performed before others. A batch schedule ensures that every time batch processing is performed, the correct tasks are performed in the proper order.

The batch schedule is a diagram that represents all batch programs and how they are sequenced. For each individual user, the schedule is a suggested starting point for the installation. Some programs are specific to products that may not be installed, so these programs may not be used at all.

The total batch schedule is divided into phases. Each phase must be completed before the next phase can begin. Within a phase, there may also be programs that depend on the completion of another program within that phase, so programs within each phase may need to be run in a particular order.

Merchandising Batch Schedule

The integrated Merchandising batch schedule combines the batch schedules of all Merchandising applications into a single schedule diagram. The diagram (later in this document) shows the batch dependencies among the Merchandising applications.

The integrated Merchandising batch schedule combines the batch modules for the following applications:

- Oracle Retail Merchandising System (RMS)
- Oracle Retail Trade Management (RTM)
- Oracle Retail Sales Audit (ReSA)
- Oracle Retail Invoice Matching (ReIM)
- Oracle Retail Price Management (RPM)

Note: Although Oracle Retail Allocation is a Merchandising application, it is not represented in this batch schedule because it does not have any batch programs to run. All Allocation processing is online processing.

Program List

The columns of the program list provide details about each batch program, as follows:

Column	Description
Program name	Name of the program or script
Functional area	Functional area of the application for which the batch program is run
Threaded	Whether the program is threaded (Y/N)
Driver	Program driver
Phase	Phase during which the program is run (see the batch schedule diagram)
Pre-dependency	Programs that must be completed before the program can be run
Post-dependency	Programs that must be run after the program completes successfully
Timing	How often the program is run (for example, daily, weekly, monthly, ad hoc)
Restart/Recovery	Whether the program uses restart/recovery (R=Yes, N=No)
Run Parameters for Program	Command syntax to run the program

For example, the following shows the information in the program list about an RMS phase 3 program named dealday:

Program Name	dealday
Functional Area	Deals
Threaded	Y
Driver	Location
Phase	3
Pre-dependency	dealinc, dealfinc, prepost dealday pre
Post-dependency	prepost dealday post, salmnth
Timing	Monthly
Restart/Recovery	R
Usage	dealday userid/passwd

The program list is grouped in the following order:

- RMS, RTM, and ReSA programs
- RPM programs
- ReIM programs
- RMS extracts for Retail Predictive Application Server (RPAS)
- RMS extracts for Retail Data Warehouse (RDW)

The extracts for RPAS and RDW are programs that are part of the RMS application.

Batch Schedule Diagram

The batch schedule diagram illustrates the program list pre- and post-dependency details. The layout and notations of the diagram also illustrate required sequences and other processing details. Executing the Merchandising batch processing in the manner diagrammed ensures that all critical dependencies are met.

For ease of setting up a schedule at client site, and also based on logical application dependencies, the diagram is divided into three main sections:

- RMS, RTM, ReIM
- ReSA
- RPM

Later chapters of this document show data flow diagrams for other batch processes:

- Chapter 4 shows the Retail Extract, Transform, and Load (RETL) data flows for the extracts from RMS to RPAS.
- Chapter 5 shows the RETL dimension and fact data flows for the extracts from RMS to Retail Data Warehouse (RDW).
- Chapter 6 shows the RETL data flow for the Promotion dimension extract from RPM to RDW.
- Chapter 7 shows the RETL data flow for the Supplier Invoice Cost dimension extract from ReIM to RDW.

RMS, ReIM, RTM Section

The first section diagrams the RMS, ReIM, and RTM programs and their dependencies. This section is further divided into phases 0 through 7, ad hoc, and date set batch.


Each phase must be completed before the next phase can begin. Also, a phase may contain programs that depend on other programs within the phase. Programs within each phase may need to run in a particular sequence.

The following are brief descriptions of the Merchandising batch processing phases. Depending on your implementation, some programs and phases may not apply.

Phase	Description
Phase 0	The first phase performs essential table maintenance including: <ul style="list-style-type: none"> ▪ Daily purges ▪ Updates to currency exchange rates ▪ Updates to value-added tax (VAT) data
Phase 1	This phase prepares the tables for interfacing with external systems in Phase 2. Among other programs, the stock variance (stkvar) batch program is run to update stock counts.
Phase 2	During this phase, information is uploaded from external interfaces, including point of sale (POS) data (posupld batch program).
Phase 3	In this phase, the main RMS processing programs are run for purchasing, ordering, stock ledger, deals, and replenishment.
Phase 4	This phase pushes data to external sources. Changed system information is rebuilt. Open to buy (OTB) data is updated. Information is sent to the forecasting system.

Phase	Description
Phase 5	This phase consists of ReIM process upload programs.
Phase 6	This phase consists of ReIM process roll-up programs.
Phase 7	This phase consists of ReIM process download programs.
Ad Hoc	Ad hoc batch programs can be run at any time. The ad hoc programs have no phase dependencies.
Date Set	The Date Set phase increments the system date and updates other calendar dates. Note: The date set phase should be the very last phase to run. Even the ad hoc programs should be run before the date set program.

Read the batch schedule diagram from left to right. In the following example, any of the programs (ediupavl, ediupack, stkvar, ditinsrt, lifstkup, ReceiverAdjustment, DiscrepancyPurge) can start at the same time; however, the stkupld program cannot start until the lifstkup program is successfully completed.

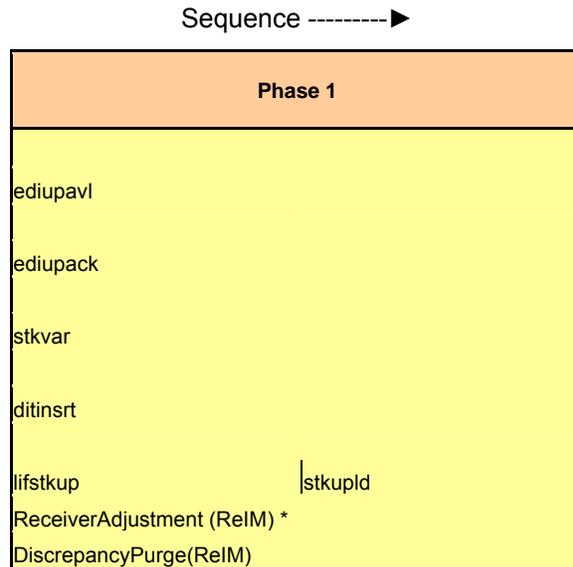

ReSA Section

This section diagrams the ReSA programs and their dependencies.

RPM Section

This section diagrams the RPM programs and their dependencies.

Notations in the Batch Schedule Diagram

Pipes

Pipes are vertical bars (|) that represent the dependencies within a phase. Reading left to right, a pipe indicates that one or more programs to the right depend upon completion of one or more programs to the left.

In the following example, the `stkupld` module depends on the `lifstkup` module; that is, the `stkupld` module can be run only after successful completion of the `lifstkup` module.

<code>lifstkup</code>		<code>stkupld</code>
-----------------------	--	----------------------

In the following example, both of the modules `cntrordb` and `reqext` are dependent on `ociroq`. Neither `cntrordb` nor `reqext` can be run until the `ociroq` module has completed successfully.

<code>ociroq</code>		<code>cntrordb</code>
		<code>reqext</code>

In the following example, the `ibcalc` module is dependent on both `ibexpl` and `cntrprss`. The `ibcalc` module cannot be run until both `ibexpl` and `cntrprss` have completed successfully.

<code>ibexpl</code>		<code>ibcalc</code>
<code>cntrprss</code>		

Abbreviations

In the diagram, abbreviations in parentheses that follow program names have the following meanings:

Abbreviation	Meaning
(perl)	The module is a Perl script.
(FIF)	The module is related to the Financials application.
(sqlldr)	There is a sqlloader process to load/ftp the output files.
(rebuild all)	There is a rebuild process inside the application.
(IM)	The module is related to Invoice Matching but owned by RMS.
(RMS)	The module belongs to RMS.
(RMS)	(Bold type) The RMS module is executed externally to that phase.
(ReSA)	The module belongs to ReSA.
(ReSA)	(Bold type) The ReSA module is executed externally to that phase.
(ReIM)	The module belongs to ReIM.
(RTM)	The module belongs to RTM.
(Weekly)	The module is executed weekly.
(Monthly)	The module is executed monthly.
(Forms Auditing)	This is an online forms auditing process related to ReSA.

Footnotes

Footnote symbols (*, **, †, ‡) refer to footnotes that appear below that phase or section of the diagram.

prepost Program

The prepost program facilitates multi-threading by allowing general system administration functions (such as table deletions or mass updates) to be completed after all threads of a particular program have been processed. The prepost program must be run before, after, or both before and after, programs that require specific processing to run or complete successfully.

In the batch schedule diagram, the prepost program is indicated by “pre” and “post” entries, as in the following examples.

In the following example, pre-processing is required before running the ociroq program.

pre	ociroq
------------	---------------

In the following example, pre-processing is required before running the stkupd program. Also, post-processing is required after successful completion of the stkupd program.

pre	stkupd	post
------------	---------------	-------------

In the following example, post-processing is required after successful completion of the sccest program.

sccest	post
---------------	-------------

Modifications to the Batch Schedule

The integrated Merchandising batch schedule shows the dependencies for all the programs that *could* be run by a retailer. Based on many factors, there will always be some programs that a retailer does not run. Determining which programs, or groups of programs, are not required is a job that should be performed at implementation time.

One major factor involves the applications that the retailer has purchased and wants to install:

- For example, a retailer may have purchased RMS, but not ReIM; in this case, the ReIM programs would not be run.
- Another example is that a retailer may not want to use some functionality within an application. Perhaps a retailer purchased RMS but did not purchase the RDW application. In this case, the retailer may not want to run the programs that extract RMS data to be used later by the RDW application.

These major configuration choices also affect whether some programs are used:

- Whether the Retail Integration Bus (RIB) is used
For more information about configuring the RIB for Merchandising applications, see “Configuring RPM without the RIB” in the “Backend System Administration and Configuration” chapter of the Oracle Retail Price Management Operations Guide.
- Whether full-featured or simplified Retail Price Management (RPM) is used
For more information about configuring simplified RPM, see the “Backend System Administration and Configuration” chapter in the Retail Price Management Operations Guide.
- Whether full-featured or simplified RTM is used
For more information about configuring simplified RTM, see the “Oracle Retail Trade Management Batch” chapter in Volume 1 of the Oracle Retail Merchandising System Operations Guide.

RMS,RTM,ReSA Program Dependency and Scheduling Details

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
auditprg	Audit	N	N/A	ad hoc	N/A	N/A	daily	N	auditprg user/passwd
auditsys	Audit	N	N/A	ad hoc	N/A	N/A	daily	N	auditsys user/passwd
batch_orpos_extract.ksh	Point of Sale Interface	Y	Store	4	'RPMtoORPOSPublishExport.sh'	N/A	daily	N	batch_orpos_extract.ksh user/passwd [-p <no. of threads>] [DIR - location where extracts are to be generated]
ccprg	Costing	N	N/A	ad hoc	N/A	N/A	monthly	N	ccprg user/passwd
cedid	Trade Management	Y	Broker	2	N/A	N/A	daily	R	cedid user/passwd broker file_name
cmpprg	Pricing	N	N/A	ad hoc	N/A	N/A	daily	N	cmpprg user/passwd
cmpupld	Pricing	N	N/A	ad hoc	N/A	All RPM batch modules	ad hoc	R	cmpupld user/passwd input_file reject_file
cnrmain	Contracting	N	N/A	0	N/A	All Replenishment modules	daily	R	cnrmain user/passwd
cnrtorbd	Contracting	Y	Contract	3	rpladq	prepost cnrtorbd post	daily	R	cnrtorbd user/passwd
cnrtprss	Contracting	Y	Dept	3	rplex	prepost rplbid post	daily	R	cnrtprss user/passwd
costcalc	Deals	Y	Supplier	2	precostcalc	prepost costcalc post	daily	R	costcalc user/passwd supplier (May use the batch_costcalc.ksh for launching this program as it is created based on performance considerations)
cremhierdy	Reclassification	N	N/A	4	N/A	recldy	daily	R	cremhierdy user/passwd
deallact	Deals	Y	Deal Id	3	prepost dealact_nor pre	N/A	daily	R	deallact user/passwd
dealcls	Deals	N	N/A	3	prepost dealact_sales pre	N/A	daily	R	dealcls user/passwd
dealday	Deals	Y	Location	3	dealinc	prepost dealday post	monthly	R	dealday user/passwd
dealex	Deals	Y	Deal Id	3	precostcalc	prepost dealex post	daily	N	dealex user/passwd
dealfct	Deals	Y	Deal Id	3	dealinc	recldy	daily	R	dealfct user/passwd [Y/N - EOM processing ind]
dealfinc	Deals	Y	Deal Id	3	dealact	dealdy	weekly/ad hoc	R	dealfinc user/passwd
dealinc	Deals	Y	Deal Id	3	prepost dealinc pre	salmtb (if monthly)	monthly	R	dealinc user/passwd [Y/N - EOM processing ind]
dealprg	Deals	N	N/A	ad hoc	N/A	N/A	monthly	R	dealprg user/passwd
dealupld	Deals	Y	File-based	0	(This program is the first one in Deals batch)	(All other deals programs)	daily	R	dealupld user/passwd input_file reject_file
dtrbrld	Item Maintenance	Y	Dept	3	information is uploaded into Oracle Retail)	(SQL*Load the output file)	daily	R	dtrbrld user/passwd outline
discobapply	OTB	Y	Dept	4	orddscrt	N/A	daily	R	discobapply user/passwd
dstrocpub	Pricing/Transfers/Allocation Publish	Y	Store	3	PriceEventExecutionBatch(RPM)	prepost dstrocpub post	daily	R	dstrocpub user/passwd dtrnsrt user/passwd (P or S) (supplier/partner). Partner or Supplier. P or S = program is either run for deals set up by supplier/partner is selected by appropriate calling script and passed into program. Note: (May use the batch_dtrnsrt.ksh for launching this program as it is created based on performance considerations)
dtinsrt	Deals	N	N/A	1	prepost	costcalc	daily	R	dtinsrt user/passwd
dyprg	Maintenance	N	N/A	0	N/A	(All other batch programs)	daily	N	dyprg user/passwd
docclose	Receiving	N	N/A	ad hoc	N/A	N/A	daily	R	docclose user/passwd
dtesys	Calendar	N	N/A	date_set	(This program should run at the end of the batch cycle)	prepost dtesys post	daily	N	dtesys user/passwd [ndate-YYYYMMDD format]
dumnyctn	Receiving	N	N/A	ad hoc	N/A	N/A	daily	N	dumnyctn user/passwd
eddlact	Maintenance	N	N/A	ad hoc	N/A	N/A	ad hoc	N	eddlact user/passwd eddladd_output eddladd_catalog
eddlcon	Contracting	N	N/A	ad hoc	N/A	N/A	ad hoc	N	eddlcon user/passwd eddlcon_outline
eddlinlv	Invoice Matching	Y	Location	4	N/A	N/A	daily	R	eddlinlv user/passwd output_filename
eddlord	Ordering	N	N/A	4	ordrev (and after replenishment)	N/A	ad hoc	R	eddlord user/passwd filename
eddlprd	EDI Interface - Sales and Inventory	N	N/A	4	prepost eddlprd pre	prepost eddlprd post	daily	R	eddlprd user/passwd filename
eddlprg	EDI Interface - Purge	N	N/A	ad hoc	(Towards the end of the batch cycle)	N/A	monthly	R	eddlprg user/passwd
eddupackd	Maintenance	N	File-based	2	N/A	N/A	daily	N	eddupackd user/passwd input_file reject_file
eddupack	EDI Interface - ordering	N	N/A	1	N/A	N/A	ad hoc	R	eddupack user/passwd data_file reject_file
eddupavt	EDI Interface - Contracts	N	File-based	1	N/A	N/A	daily	R	eddupavt user/passwd input_file reject_file
eddupact	EDI Interface - Suppliers	N	File-based	ad hoc	N/A	N/A	daily	R	eddupact user/passwd ed_data_file error_file
fcstprg	Forecasting	Y	Domain Id	ad hoc	prepost fcstprg pre	prepost fcstprg post	daily	N	fcstprg user/passwd domain
fcstbrld	Forecasting	Y	Domain Id	3	N/A	prepost fcstbrld post	weekly	R	fcstbrld user/passwd
fcstbrld_sbc	Forecasting	Y	Domain Id	3	prepost fcstbrld post	N/A	weekly	R	fcstbrld_sbc user/passwd
ffigldn1	Financial Interface	Y	Dept	3	salstage	prepost ffigldn1 post	daily	R	ffigldn1 user/passwd
ffigldn2	Financial Interface	Y	Dept	3	salstage	salapnd	daily	R	ffigldn2 user/passwd
ffigldn3	Financial Interface	Y	Store/Wh	3	salmtb	N/A	monthly	R	ffigldn3 user/passwd
ftmednd	Planning System Interface	N	N/A	ad hoc	N/A	N/A	ad hoc	R	ftmednd user/passwd
gcpuld	Misc Interface - Taxgeocode	N	N/A	ad hoc	N/A	N/A	ad hoc	R	gcpuld <username>/password@environment <infile> <outfile>
genpreiss	Ordering	Y	Supplier	ad hoc	N/A	N/A	ad hoc	R	genpreiss user/passwd
gradupld	Forecasting	N	File-based	ad hoc	N/A	N/A	ad hoc	R	gradupld user/passwd input_file rej_file
htsbl	Sales	Y	Location	3	postupld	prepost htsbl post	weekly	R	htsbl user/passwd level/weekly/rebuild
htsbl_diff	Sales	N	N/A	ad hoc	htsbl	N/A	ad hoc	N	htsbl_diff user/passwd
htsblmth	Sales	Y	Dept	4	stosupld	prepost htsblmth post	monthly	R	htsblmth user/passwd level/monthly/rebuild
htsblmth_diff	Sales	N	N/A	ad hoc	N/A	N/A	ad hoc	N	htsblmth_diff user/passwd
hstmthupd	Sales	Y	Location	3	(The program should be run on the last day of the month).	(Run SQL*Loader using the control file hstmthupd.ctl to load data from the output file written by HSTMTHUPD.PC for non-existent records on ITEM_LOC_HIST_MTH)	monthly	R	hstmthupd user/passwd (out_file)
hstrpg	Sales	N	N/A	ad hoc	N/A	N/A	monthly	N	hstrpg user/passwd
hstrpg_diff	Sales	N	N/A	ad hoc	N/A	N/A	weekly	N	hstrpg_diff user/passwd
htwkupd	Sales	Y	Store/Wh	3	N/A	(Run SQL*Loader using the control file htwkupd.ctl to load data from the output file written by HSTWKUPD.PC for non-existent records on ITEM_LOC_HIST)	weekly	R	htwkupd user/passwd (out_file)
htsupld	Trade Management	Y	File-based	ad hoc	Hts240_to_2400 (perl script) Ushs2rms (perl script)	prepost htstupld pre	ad hoc	R	htsupld user/passwd input_file reject_file country_id ; perl hts_240_to_2400 infile outfile ; perl ushs2rms infile outfile rejectfile
ibcalc	Investment Buy	Y	Dept	3	replex	prepost ibcalc pre	daily	R	ibcalc user/passwd
ibexpl	Investment Buy	N	N/A	3	rplex	prepost rplbid post	daily	N	ibexpl user/passwd
invprg	Inventory Adjustments	N	N/A	ad hoc	N/A	N/A	monthly	N	invprg user/passwd
invclshp	Invoice Matching	N	N/A	2	N/A	N/A	daily	N	invclshp user/passwd
invprg	Invoice Matching	N	N/A	ad hoc	ordprg	N/A	monthly	R	invprg user/passwd
lctbrld	Letter of Credit	N	N/A	4	N/A	lcm700 (perl script)	daily	R	lctbrld user/passwd output_file
lcmndid	Maintenance - Location	N	N/A	ad hoc	storesadd	N/A	monthly	R	lcmndid user/passwd
lcmndid	Letter of Credit	N	N/A	4	N/A	lcm707 (perl script)	daily	R	lcmndid user/passwd output_file
lcp798	Letter of Credit	N	N/A	2	lcm798 (perl script)	N/A	daily	R	lcp798 user/passwd input_file rej_file
lcpuld	Letter of Credit	N	N/A	2	lcm730 (perl script)	N/A	daily	R	lcpuld user/passwd input_file rej_file
lftskup	Stock Ledger	N	File-based	1	inv_bal_upload.sh (warehouse mgmt program)	stskupd	daily	N	lftskup user/passwd input_file output_file

likestore	Maintenance - Location	Y	Dept	ad hoc	storeadd	prepost likestore post	daily	R	likestore user/passwd
mrt	Mass Return Transfers	Y	Warehouse	2	N/A	mrtv	daily	R	mrt user/passwd
mrtprg	Mass Return Transfers	Y	Warehouse	ad hoc	N/A	mrtupd	ad hoc	R	mrtprg user/passwd
mrtv	Mass Return Transfers	Y	Warehouse	2	mrt	mrtv	daily	R	mrtv user/passwd
mrtupd	Mass Return Transfers	Y	Warehouse	2	mrtv	N/A	daily	R	mrtupd user/passwd
nwpurge	Stock Ledger	N	N/A	ad hoc	N/A	N/A	ad hoc	N	nwpurge user/passwd
nwpyearend	Stock Count	Y	Location	4	run on last day of year	N/A	yearly	R	nwpyearend user/passwd
ociroq	Replenishment	N	N/A	3	repladj	N/A	daily	R	ociroq user/passwd
onordext	Planning System Interface	Y	Transfer	4	onordext	onordnd	weekly	R	onordext user/passwd datefile
onordnd	Planning System Interface	Y	Store/Wh	4	onordext	N/A	daily	R	onordnd user/passwd
onordext	Planning System Interface	Y	Order	4	prepost onordext pre	onordext	daily	R	onordext user/passwd datefile
ordautcl	Ordering	N	N/A	ad hoc	N/A	N/A	daily	N	ordautcl user/passwd
ordscnt	Deals	Y	Supplier	4	reclsdly	discoctbapply	daily	R	ordscnt user/passwd
ordng	Ordering	N	N/A	ad hoc	N/A	invprg	monthly	N	ordng user/passwd
ordrev	Ordering	N	N/A	4	ordscnt	ediornd	daily	R	ordrev user/passwd
ordupd	Ordering	N	N/A	4	batch	obtdisal	daily	N	ordupd user/passwd
otbdord	OTB	N	N/A	4	ordupd	obtdord	daily	R	otbdord user/passwd output_file
otbdisal	OTB	N	N/A	4	ordupd	N/A	daily	R	otbdisal user/passwd output_file
otbdnd	OTB	N	N/A	4	ordupd	N/A	daily	R	otbdnd user/passwd output_file
otbprg	OTB	N	N/A	ad hoc	N/A	N/A	monthly	N	otbprg user/passwd
otbupwd	OTB	Y	File-based	ad hoc	N/A	N/A	daily	R	otbupwd user/passwd input_file reject_file
otbupld	OTB	Y	File-based	ad hoc	N/A	N/A	daily	R	otbupld user/passwd input_file reject_file
poscndid	Point of Sale Interface	N	N/A	4	poscndid	prepost poscndid post	daily	R	poscndid user/passwd outputfile
posndid	Point of Sale Interface	Y	Store	ad hoc	N/A	prepost posndid post	daily	R	posndid user/passwd output_filename
posgdld	Point of Sale Interface	N	N/A	4	reclsdly	N/A	daily	R	posgdld user/passwd output_file
posupld	Sales	Y	File-based	2	saexprms(ReSA)	prepost posupld post	daily	R	posupld user/passwd infile reject_file itemfile lockfile
precostcalc	Deals	Y	Supplier	2	prepost precostcalc pre	costcalc	daily	R	precostcalc user/passwd supplier (May use the batch_precostcalc.ksh for launching this program as it is created based on performance considerations)
prepost	Prepost functionality	N	N/A	all phases	N/A	N/A	daily	N	prepost user/passwd program pre_or_post
reclsdly	Item Maintenance	Y	Reclass no	4	cremhierdly	prepost reclassly post	daily	R	reclsdly user/passwd process_mode
repladj	Replenishment	Y	Dept	3	rplatusd	rext	daily	R	repladj user/passwd
reqext	Replenishment	Y	Partition (Item)	3	prepost ociroq pre prepost reqext pre	prepost reqext post rplext	daily	R	reqext user/passwd partition_position (May use the batch_reqext.ksh for launching this program as it is created based on performance considerations)
rlmaint	Replenishment	Y	Location	3	storeadd rplatusd rplsplit	prepost rlmaint post repladj	daily	R	rlmaint username/password
rlapprv	Replenishment	N	N/A	3	supcnstr prepost rlapprv pre	N/A prepost rplatusd post repladj	daily	R	rlapprv user/passwd
rplatusd	Replenishment	Y	Location	3	prepost rplatusd pre ibcalc rplext cntrprsr vpibld	reqext rplext	daily	R	rplatusd user/passwd
rpibld	Replenishment	Y	Supplier	3	prepost rpl pre rplatusd rlmaint repladj reqext	prepost rpibld post supcnstr prepost rplext post cntrprsr(if contracting is used, otherwise run ... ibcxpl ibcalc	daily	R	rpibld username/password
rplext	Replenishment	Y	Dept	3	cntrordb	rpibld	daily	R	rplext user/passwd dept (May use the batch_rplext.ksh for launching this program as it is created based on performance considerations)
rpbrg	Replenishment	N	N/A	ad hoc	N/A	N/A	daily	N	rpbrg user/passwd
rpbrg_month	Replenishment	N	N/A	ad hoc	N/A	N/A	monthly	N	rpbrg_month user/passwd
rplcalt	Replenishment	Y	Supplier	3	supcnstr	rlapprv	daily	R	rplcalt user/passwd
rpmovavg	Pricing	Y	Store	3	salstage	N/A	daily	R	rpmovavg user/passwd business_date(YYYYMMDD) store(optional)
rtvprg	RTV	N	N/A	ad hoc	N/A	N/A	monthly	N	rtvprg user/passwd
sacrypt	Sales Audit	Y	Store/Day	SA	sagctref satotals	N/A saexprim	daily	N	sacrypt user/passwd infile outfile key_file e/d (Encryption/Decryption indicator) Note: outfile generated by batch is infile for saimplog.
saescheat	Sales Audit	N	N/A	SA	satotals sarules	saexprim sapurge	monthly	R	saescheat user/passwd
saexpach	Sales Audit	N	N/A	SA	satotals sapreexp	N/A	daily	R	saexpach user/passwd
saexpgl	Sales Audit	N	N/A	SA	satotals sarules sapreexp	N/A	daily	R	saexpgl user/passwd
saexpin	Sales Audit	N	N/A	SA	satotals sapreexp	saescheat	daily	R	saexpin user/passwd
saexprow	Sales Audit	Y	Store	SA	satotals sapreexp	resa2rdw(perf script)	daily	R	saexprow user/passwd ; perf resa2rdw inputfile outputfile
saexprms	Sales Audit	Y	Store	SA	satotals sapreexp	saprepost saexprms post	daily	R	saexprms user/passwd
saexpuar	Sales Audit	N	N/A	SA	satotals sarules sapreexp	N/A	daily	R	saexpuar user/passwd
sagctref	Sales Audit	N	N/A	SA	sastdyr	saimplog	daily	R	sagctref user/passwd itemfile wastefile ref_itemfile prim_variantfile varupcfile storedayfile codefile errorfile cvallfile storeposfile tendertypefile merchcodefile partnerfile supplierfile employeefile bannerfile.
saimpadj	Sales Audit	N	N/A	SA	saimplogfin	satotals	daily	R	(To prevent a file from being written, place a '-' in its place. Note: Item files must all be written together). saimpadj user/passwd input_file rej_file
saimplog	Sales Audit	Y	Store/Day	SA	sagctref saprepost saimplog pre saimplog	saimplog	daily	N	saimplog user/pw infile badfile itemfile wastefile reffitemfile primvariantfile varupcfile storedayfile promfile codefile errorfile cvallfile storeposfile tendertypefile merchcodefile partnerfile supplierfile employeefile bannerfile
saimplogfin	Sales Audit	N	N/A	SA	savouch	satotals	daily	R	saimplogfin user/passwd store_day_file
saimplogdup_upd	Sales Audit	N	Store/Day	SA	N/A salstage figidn1	N/A	after store day delete	R	saimplogdup_upd user/passwd storedayfile storeposfile
salapnd	Stock Ledger	N	N/A	3	figidn2	N/A	daily	R	salapnd user/passwd
salidy	Stock Ledger	Y	Store/Wh	3	salstage	salweek	daily	R	salidy user/passwd
salech	Stock Ledger	Y	Dept	3	salmh	N/A	half yearly	N	salech user/passwd
salins	Sales	0	N/A	0	N/A	N/A	daily	R	salins user/passwd
salmaint	Stock Ledger	N	N/A	ad hoc	N/A	N/A	half yearly	N	salmaint user/passwd pre_or_post
salmh	Stock Ledger	Y	Dept	3		prepost salmh post	monthly	R	salmh user/passwd

salprg	Stock Ledger	N	N/A	ad hoc	N/A	N/A	salprg	daily	N	salprg user/passwd
salstage	Stock Ledger	N	N/A	3	postupld	salprg	salstage	daily	N	salstage user/passwd
salweek	Stock Ledger	Y	Dept	3	vendinv	salweek	salweek	weekly	R	salweek user/passwd
sapreexp	Sales Audit	N	N/A	SA	SA audit process	SA	SA	daily	R	sapreexp user/passwd
saprepost	Sales Audit	N	N/A	SA	SA audit process	SA	SA	daily	R	saprepost user/passwd
sapurge	Sales Audit	Y	Store	SA	SA audit process	SA	SA	daily	R	sapurge user/passwd deleted_items_file [optional list of store days to be deleted]
sanules	Sales Audit	N	N/A	SA	SA audit process	SA	SA	daily	R	sanules user/passwd store_no
saatdycr	Sales Audit	N	N/A	date_set	SA audit process	SA	SA	daily	R	saatdycr user/passwd [YYYYMMDD]
saatstate	Sales Audit	N	N/A	SA	SA audit process	SA	SA	daily	R	saatstate user/passwd store_no
savouch	Sales Audit	N	N/A	SA	SA audit process	SA	SA	daily	R	savouch user/passwd infile rejfile tendertype_file
scoexec	Coating	Y	Cost change	3	costslxex.kah (RMS to RDW RETL extract)	coating	coating	daily	R	scoexec user/passwd
schedprg	Organizational Hierarchy	N	N/A	ad hoc	Organizational Hierarchy	sch	sch	monthly	R	sch user/passwd
slmain	Item Maintenance	N	N/A	ad hoc	Item Maintenance	slmain	slmain	ad hoc	R	slmain user/passwd
soutndid	Forecasting	Y	Domain Id	4	N/A	forecast	forecast	daily	R	soutndid user/passwd
stkdy	Stock Ledger	Y	Dept	3	stkvar	stkdy	stkdy	daily	R	stkdy user/passwd
stkgprg	Stock Ledger	N	N/A	ad hoc	Stock Ledger	stkgprg	stkgprg	monthly	R	stkgprg user/passwd
stkschedxpld	Stock Ledger	Y	Location	0	N/A	stkschedxpld	stkschedxpld	daily	R	stkschedxpld user/passwd
stkskpd	Stock Ledger	Y	Location	3	stkskpd	stkskpd	stkskpd	daily	R	stkskpd user/passwd
stkskpld	Stock Ledger	Y	Dept	1	stkskpld	stkskpld	stkskpld	daily	R	stkskpld user/passwd input_file reject_file
stksvar	Stock Ledger	Y	Dept	1	stksvar	stksvar	stksvar	daily	R	stksvar user/passwd [report_file_name]
stkschedxpld	Stock Ledger	Y	Dept	3	stkschedxpld	stkschedxpld	stkschedxpld	daily	R	stkschedxpld user/passwd
stkgdnd	Stock Ledger	Y	Dept	4	N/A	stkgdnd	stkgdnd	weekly	R	stkgdnd user/passwd input_file
storeadd	Maintenance - Location	N	N/A	ad hoc	storeadd	storeadd	storeadd	daily	R	storeadd user/passwd
supcnstr	Replenishment	N	N/A	3	supcnstr	supcnstr	supcnstr	daily	R	supcnstr user/passwd
supmth	Stock Ledger	Y	Dept	3	supmth	supmth	supmth	monthly	R	supmth user/passwd
tampercrn	Receiving	N	N/A	ad hoc	tampercrn	tampercrn	tampercrn	ad hoc	N	tampercrn user/passwd
tkckdnd	Maintenance	N	N/A	ad hoc	tkckdnd	tkckdnd	tkckdnd	daily	R	tkckdnd user/passwd filename print_online_ind days_in_advance [location]
tlfposdn	Sales Tax	N	N/A	4	tlfposdn	tlfposdn	tlfposdn	daily	R	tlfposdn user/passwd output_file
tranupld	Trade Management	Y	File-based	ad hoc	tranupld	tranupld	tranupld	daily	R	tranupld user/passwd infile
tsprg	Transfers	N	N/A	ad hoc	tsprg	tsprg	tsprg	monthly	R	tsprg user/passwd
txposdn	Point of Sale Interface	N	N/A	4	txposdn	txposdn	txposdn	daily	R	txposdn user/passwd
trtpuld	Sales Tax	N	N/A	4	trtpuld	trtpuld	trtpuld	ad hoc	R	trtpuld username/password input_file reject_file
vatdxpl	Maintenance - VAT	Y	Vat Region	0	N/A	vatdxpl	vatdxpl	daily	R	vatdxpl user/passwd
vendinv	Deals	Y	Deal Id	3	vendinv	vendinv	vendinv	daily	R	vendinv user/passwd
vendinvf	Deals	Y	Deal Id	3	vendinvf	vendinvf	vendinvf	daily	R	vendinvf user/passwd
vrplbld	Replenishment	Y	Supplier	2	vrplbld	vrplbld	vrplbld	daily	R	vrplbld user/passwd
wasteadj	Stock Ledger	Y	Store	3	wasteadj	wasteadj	wasteadj	daily	R	wasteadj user/passwd
whadd	Maintenance - Location	N	N/A	ad hoc	whadd	whadd	whadd	daily	R	whadd user/passwd
whstrag	Maintenance - Location	N	N/A	3	whstrag	whstrag	whstrag	daily	R	whstrag user/passwd

RPM Dependency and Scheduling Details

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
ItemReclassBatch	Future Retail	N	N/A	N/A	reclass(RMS)	ItemReclassBatch	daily/hoc	N	itemReclassBatch.sh rpm-app-userid password
NewItemLocBatch	Future Retail	N	N/A	N/A	storeadd(RMS), ItemReclassBatch	LocationMoveBatch	daily/hoc	N	NewItemLocBatch.sh rpm-app-userid password [status [error-committ-count]]
LocationMoveBatch	Zone Structure/Future Retail	Y	Location move	N/A	NewItemLocBatch, LocationMoveBatch	PriceEventExecutionBatch	daily	N	LocationMoveBatch.sh rpm-app-userid password
PriceEventExecutionBatch	Price Change/Clearance/Promotion	Y	Pricing event	N/A	salstage (RMS)	PriceEventExecutionRMSBatch	daily	N	PriceEventExecutionBatch.sh rpm-app-userid password
PriceEventExecutionRMSBatch	Price Change/Clearance/Promotion	Y	Pricing event	N/A	PriceEventExecutionBatch	PriceEventExecutionDealsBatch	daily	N	PriceEventExecutionRMSBatch.sh rpm-app-userid password
PriceEventExecutionDealsBatch	Price Change/Clearance/Promotion	Y	Pricing event	N/A	PriceEventExecutionRMSBatch	MerchExtractKickOffBatch	daily	N	PriceEventExecutionDealsBatch.sh rpm-app-userid password
PriceStrategyCalendarBatch	Price Strategy	N	N/A	N/A	N/A	MerchExtractKickOffBatch	daily	N	PriceStrategyCalendarBatch.sh rpm-app-userid password
WorksheetAutoApproveBatch	Pricing Worksheet	Y	Price strategy	N/A	N/A	MerchExtractKickOffBatch	daily	N	WorksheetAutoApproveBatch.sh rpm-app-userid password
MerchExtractKickOffBatch	Pricing Worksheet	Y	Price strategy	N/A	WorksheetAutoApproveBatch	N/A	daily	N	MerchExtractKickOffBatch.sh rpm-app-userid password
RPMTORPOSPublishBatch.sh	Price Change/Clearance/Promotion	N	N/A	N/A	PriceStrategyCalendarBatch, MerchExtractKickOffBatch	N/A	daily	N	ksh RPMTORPOSPublishBatch.sh <userid>password@sid <-log path> <-error path>
RPMTORPOSPublishExport.sh	Price Change/Clearance/Promotion	Y	Location	N/A	RPMTORPOSPublishBatch.sh	N/A	daily	N	ksh RPMTORPOSPublishExport.sh <userid>password@sid <-Number of slots> <-logpath> <-error path> <-Export path>
RegularPriceChangePublishBatch	Regular Price Changes	Y	Price event (item/loc)	N/A	WorksheetAutoApproveBatch	RegularPriceChangePublishExport	daily/ad hoc	N	RegularPriceChangePublishBatch.sh rpm-app-userid password
regularPriceChangePublishExport	Regular Price Changes	N	Price event (item/loc)	N/A	RegularPriceChangePublishBatch	ClearancePriceChangePublishExport	daily/ad hoc	N	regularPriceChangePublishExport.sh rpm-db-userid/pwd @database [export-path]
ClearancePriceChangePublishBatch	Clearances	Y	Price event (item/loc)	N/A	WorksheetAutoApproveBatch	ClearancePriceChangePublishExport	daily/ad hoc	N	ClearancePriceChangePublishBatch.sh rpm-app-userid password
ClearancePriceChangePublishExport	Clearances	N	Price event (item/loc)	N/A	ClearancePriceChangePublishBatch	ClearancePriceChangePublishExport	daily/ad hoc	N	ClearancePriceChangePublishExport.sh rpm-db-userid/pwd @database [export-path]
PromotionPriceChangePublishBatch	Promotions	Y	Price event (item/loc)	N/A	WorksheetAutoApproveBatch	PromotionPriceChangePublishExport	daily/ad hoc	N	PromotionPriceChangePublishBatch.sh rpm-app-userid password
PromotionPriceChangePublishExport	Promotions	N	Price event (item/loc)	N/A	PromotionPriceChangePublishBatch	N/A	daily/ad hoc	N	PromotionPriceChangePublishExport.sh rpm-db-userid/pwd @database [export-path]
PriceChangeAutoApproveResultsPurgeBatch	Purge	N	N/A	N/A	Purge	N/A	daily/hoc	N	PriceChangeAutoApproveResultsPurgeBatch.sh rpm-app-userid password
PriceChangePurgeBatch	Purge	N	N/A	N/A	Purge	N/A	daily/hoc	N	PriceChangePurgeBatch.sh rpm-app-userid password
PriceChangePurgeWorkspaceBatch	Purge	N	N/A	N/A	Purge	N/A	daily/hoc	N	PriceChangePurgeWorkspaceBatch.sh rpm-app-userid password
PromotionPurgeBatch	Purge	N	N/A	N/A	Purge	N/A	daily/hoc	N	PromotionPurgeBatch.sh rpm-app-userid password
PurgeExpiredExecutedOrApprovedClearancesBatch	Purge	N	N/A	N/A	Purge	N/A	daily/hoc	N	PurgeExpiredExecutedOrApprovedClearancesBatch.sh rpm-app-userid password
PurgeUnusedAndAbandonedClearancesBatch	Purge	N	N/A	N/A	Purge	N/A	daily/hoc	N	PurgeUnusedAndAbandonedClearancesBatch.sh rpm-app-userid password
PurgeLocationMovesBatch	Purge	N	N/A	N/A	Purge	N/A	daily/hoc	N	PurgeLocationMovesBatch.sh rpm-app-userid password
ZoneFutureRetailPurgeBatch	Purge	N	N/A	N/A	Purge	N/A	ad hoc	N	ZoneFutureRetailPurgeBatch.sh rpm-app-userid password
ItemLocDeleteBatch	Purge	N	N/A	N/A	Purge	N/A	ad hoc	N	ItemLocDeleteBatch.sh rpm-app-userid password
priceChangeAreaDifferentialBatch	Price Change	Y	N/A	N/A	N/A	N/A	ad hoc	N	priceChangeAreaDifferentialBatch rpm-app-userid password

ReIM Dependency and Scheduling Details

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
reimautomatch	Invoice Matching (ReIM)	Y	N/A	6	NA	reimposting	daily	R	Userid/passwd
reimpurge	Invoice Matching (ReIM)	N	N/A	0	N/A	reimautomatch	daily	R	Userid/passwd
reimcomplexdealupload	Invoice Matching (ReIM)	Y	N/A	5	vendinv(RMS), vendinv(RMS)	reimautomatch	daily	R	Userid/passwd BlockSize PartitionNo
reimdiscrepancy purge	Invoice Matching (ReIM)	N	N/A	1	N/A	reimautomatch	daily	R	Userid/passwd
reimdirinvupload	Invoice Matching (ReIM)	Y	N/A	5	eddirinv(RMS)	reimautomatch	daily	R	Userid/passwd "EDI input file with path" "EDI reject file with path"
reimdirinvdownload	Invoice Matching (ReIM)	N	N/A	7	reimposting	N/A	daily	R	Userid/passwd
reimfixeddealupload	Invoice Matching (ReIM)	Y	N/A	5	vendinv(RMS), vendinv(RMS)	reimautomatch	daily	R	Userid/passwd BlockSize PartitionNo
reimrollup	Invoice Matching (ReIM)	N	N/A	6	reimautomatch	reimrollup	daily	R	Userid/passwd
reimreceiptwriteoff	Invoice Matching (ReIM)	N	N/A	6	reimautomatch	N/A	daily	R	Userid/passwd
reimposting	Invoice Matching (ReIM)	N	N/A	6	reimrollup	N/A	daily	R	Userid/passwd

RMS to RPAS RETL Extracts Dependency and Scheduling Details (EXTRACTS FOR RPAS)

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
pre_rmse_rpas.ksh	Planning/Forecast System Interface	N	N/A	N/A	N/A. This is a pre setup script	N/A	daily	N	N/A
rmse_rpas.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh. (This is the launch script to run the extracts)	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_attributes.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_daily_sales.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_domain.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_item_master.ksh	Planning/Forecast System Interface	N	N/A	N/A	recldy dlyprg	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_merchier.ksh	Planning/Forecast System Interface	N	N/A	N/A	dlyprg	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_orighier.ksh	Planning/Forecast System Interface	N	N/A	N/A	stkdy pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_stock_on_hand.ksh	Planning/Forecast System Interface	N	N/A	N/A	storeadd pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_store.ksh	Planning/Forecast System Interface	N	N/A	N/A	dlyprg	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_suppliers.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh hatwkupd	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_weekly_sales.ksh	Planning/Forecast System Interface	N	N/A	N/A	salweek whadd dlyprg	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_wh.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
rml_rpas_forecast.ksh	Planning/Forecast System Interface	N	N/A	N/A	After all RMS/Planning System Integration RETL scripts are run	Refer to RPAS Operations guide	daily	N	rml_rpas_forecast.ksh daily or weekly
rml_rpas_update_retl_date.ksh	Planning/Forecast System Interface	N	N/A	N/A		Refer to RPAS Operations guide	daily	N	rml_rpas_update_retl_date.ksh CLOSED_ORDER or RECEIVED_QTY

RMS to RDW RETL Extracts Dependency and Scheduling Details (EXTRACTS FOR RDW)

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
cdedfex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
cmpitrex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
empitrex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
empitlocex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
cnycycdex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
emplyex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
orgaraex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lcltrid (RMS)	Refer to RDW operations guide	daily	N	N/A
orgchanex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lcltrid (RMS)	Refer to RDW operations guide	daily	N	N/A
orgchhex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lcltrid (RMS)	Refer to RDW operations guide	daily	N	N/A
orgdisex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lcltrid (RMS)	Refer to RDW operations guide	daily	N	N/A
orglimex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lcltrid (RMS)	Refer to RDW operations guide	daily	N	N/A
orgloceex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lcltrid (RMS)	Refer to RDW operations guide	daily	N	N/A
orglolex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lcltrid (RMS)	Refer to RDW operations guide	daily	N	N/A
orglrmex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lcltrid (RMS)	Refer to RDW operations guide	daily	N	N/A
orgltrex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lcltrid (RMS)	Refer to RDW operations guide	daily	N	N/A
orgrgnex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lcltrid (RMS)	Refer to RDW operations guide	daily	N	N/A
phsex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
prdclex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recldy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prdcmpex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
prddpex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recldy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prddifex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recldy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prddivex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recldy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prddypex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recldy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prdgpex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recldy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prdislex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
prdlmex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recldy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prdlmex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recldy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prdlmex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recldy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prdlmex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
prdlmex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
prdlmex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recldy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A

prdbocex.ksh	RDW interface	N	N/A	N/A	A, B, crenherdy (RMS), redsdy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prduax.ksh	RDW interface	N	N/A	N/A	A, B, crenherdy (RMS), redsdy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
regpgrpx.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
regmrx.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
rsnex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
seasnex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
subtrampex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
supctres.ksh	RDW interface	N	N/A	N/A	A, B, cntnmain (RMS)	Refer to RDW operations guide	daily	N	N/A
supsupex.ksh	RDW interface	N	N/A	N/A	A, B, cntnmain (RMS)	Refer to RDW operations guide	daily	N	N/A
suptrmx.ksh	RDW interface	N	N/A	N/A	A, B, cntnmain (RMS)	Refer to RDW operations guide	daily	N	N/A
suptrms.ksh	RDW interface	N	N/A	N/A	A, B, cntnmain (RMS)	Refer to RDW operations guide	daily	N	N/A
indtypex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
tttypex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
cmptprclidx.ksh	RDW interface	N	N/A	N/A	B	Refer to RDW operations guide	daily	N	cmptprclidx.ksh output_file_path/output_file_name
csstldex.ksh	RDW interface	N	N/A	N/A	C	Refer to RDW operations guide	daily	N	csstldex.ksh output_file_path/output_file_name
exchngrates.ksh	RDW interface	N	N/A	N/A	B	Refer to RDW operations guide	daily	N	exchngrates.ksh output_file_path/output_file_name
invldex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS), mrt (RMS), ordrev (RMS)	Refer to RDW operations guide	daily	Y	invldex.ksh output_file_path/output_file_name
ivalldex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS), mrt (RMS)	Refer to RDW operations guide	daily	N	ivalldex.ksh output_file_path/output_file_name
ivrcplidx.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS), mrt (RMS)	Refer to RDW operations guide	daily	N	ivrcplidx.ksh output_file_path/output_file_name
ivrlldex.ksh	RDW interface	N	N/A	N/A	C	Refer to RDW operations guide	daily	N	ivrlldex.ksh output_file_path/output_file_name
ivrlldex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS), mrt (RMS)	Refer to RDW operations guide	daily	N	ivrlldex.ksh output_file_path/output_file_name
ivulldex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS), mrt (RMS)	Refer to RDW operations guide	daily	N	ivulldex.ksh output_file_path/output_file_name
lptotldex.ksh	RDW interface	N	N/A	N/A	C, saexpdvw (ReSA), resa2rdw	Refer to RDW operations guide	daily	N	lptotldex.ksh output_file_path/output_file_name
ncstulldex.ksh	RDW interface	N	N/A	N/A	C, costcalc (RMS)	Refer to RDW operations guide	daily	N	ncstulldex.ksh output_file_path/output_file_name
post_dwi_temp.ksh	RDW interface	N	N/A	N/A	All extract batches	Refer to RDW operations guide	daily	N	N/A
prclidx.ksh	RDW interface	N	N/A	N/A	N/A	Refer to RDW operations guide	daily	N	prclidx.ksh output_file_path/output_file_name
pre_dwi_extract.ksh	RDW interface	N	N/A	N/A	A	operations guide	daily	N	N/A
pre_dwi_temp.ksh	RDW interface	N	N/A	N/A	B	Refer to RDW operations guide	daily	N	N/A
rpclidx.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	N	rpclidx.ksh output_file_path/output_file_name
sawldex.ksh	RDW interface	N	N/A	N/A	C, cntprss (RMS), edupavi (RMS), rplapprv (RMS)	Refer to RDW operations guide	daily	N	sawldex.ksh output_file_path/output_file_name
scmiolldex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	N	scmiolldex.ksh output_file_path/output_file_name
scmiolldex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	N	scmiolldex.ksh output_file_path/output_file_name
scrtldex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	Y	scrtldex.ksh output_file_path/output_file_name
scrtldex.ksh	RDW interface	N	N/A	N/A	C, rplapprv (RMS), cntprss (RMS), rplbkd (RMS), cntnmain (RMS)	Refer to RDW operations guide	daily	N	scrtldex.ksh output_file_path/output_file_name
scstldex.ksh	RDW interface	N	N/A	N/A	B, rmsl_rpas_forecast.ksh (RMS to RPAS extract)	Refer to RDW operations guide	daily	N	scstldex.ksh output_file_path/output_file_name
slclwex.ksh	RDW interface	N	N/A	N/A	C, saexpdvw (ReSA), resa2rdw	Refer to RDW operations guide	daily	Y	slclwex.ksh output_file_path/output_file_name
slsldmex.ksh	RDW interface	N	N/A	N/A	C, saexpdvw (ReSA), resa2rdw	Refer to RDW operations guide	daily	Y	slsldmex.ksh output_file_path/output_file_name
slsmkhdldex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	N	slsmkhdldex.ksh output_file_path/output_file_name
slblmtdex.ksh	RDW interface	N	N/A	N/A	C, salmth (RMS)	Refer to RDW operations guide	daily	N	slblmtdex.ksh output_file_path/output_file_name
slblwex.ksh	RDW interface	N	N/A	N/A	C, salweek (RMS)	Refer to RDW operations guide	daily	N	slblwex.ksh output_file_path/output_file_name
ttldmex.ksh	RDW interface	N	N/A	N/A	C, saexpdvw (ReSA), resa2rdw	Refer to RDW operations guide	daily	N	ttldmex.ksh output_file_path/output_file_name
vchreschdex.ksh	RDW interface	N	N/A	N/A	B, savouch (ReSA)	Refer to RDW operations guide	daily	N	vchreschdex.ksh output_file_path/output_file_name
vchmvoelstgex.ksh	RDW interface	N	N/A	N/A	B, savouch (ReSA)	Refer to RDW operations guide	daily	N	vchmvoelstgex.ksh output_file_path/output_file_name
vchroutwex.ksh	RDW interface	N	N/A	N/A	B, savouch (ReSA)	Refer to RDW operations guide	daily	N	vchroutwex.ksh output_file_path/output_file_name

Notes:
A is a set of batch processes on the RDW system.
A consists of the following RDW batch modules:
 factopendm.ksh
 medfactopendm.ksh
 factoclosedm.ksh
 mt_prime.ksh
B is pre_dwi_extract.ksh DWI batch process.
C is pre_dwi_temp.ksh DWI batch process.

Interface Diagrams for RMS and RPAS


Because RMS is the retailer's central merchandising transactional processing system, it is the principle source of the foundation data needed in some of the Oracle Retail suite of products. RMS provides foundation data to RPAS, and RPAS provides planning data to RMS.

This chapter presents flow diagrams for data processing from sources. The source system's program or output file is illustrated, along with the program or process that interfaces with the source. After initial interface processing of the source, the diagrams illustrate the flow of the data.

Before setting up a program schedule, familiarize yourself with the functional and technical constraints associated with each program. Refer to the Retail Merchandising System Operations Guide for more information about these interface programs.

RMS Pre/Post Extract Diagrams


RMS Pre RETL Extract Maintenance

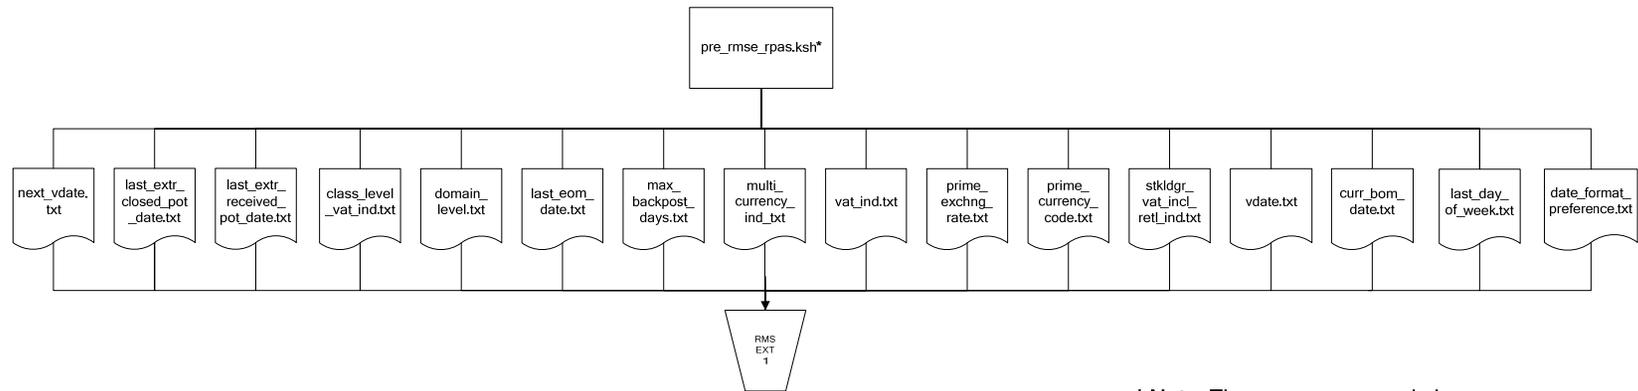


*** Note:** The `pre_rmse_rpas.ksh` program checks for existing `.txt` output files. Because of this validation, retailers running the program for the first time should include an optional `-c` parameter. This parameter allows the program to run successfully without pre-existing `.txt` output files.

RMS Foundation Data Extract Diagrams


Merchandise Hierarchy for RPAS

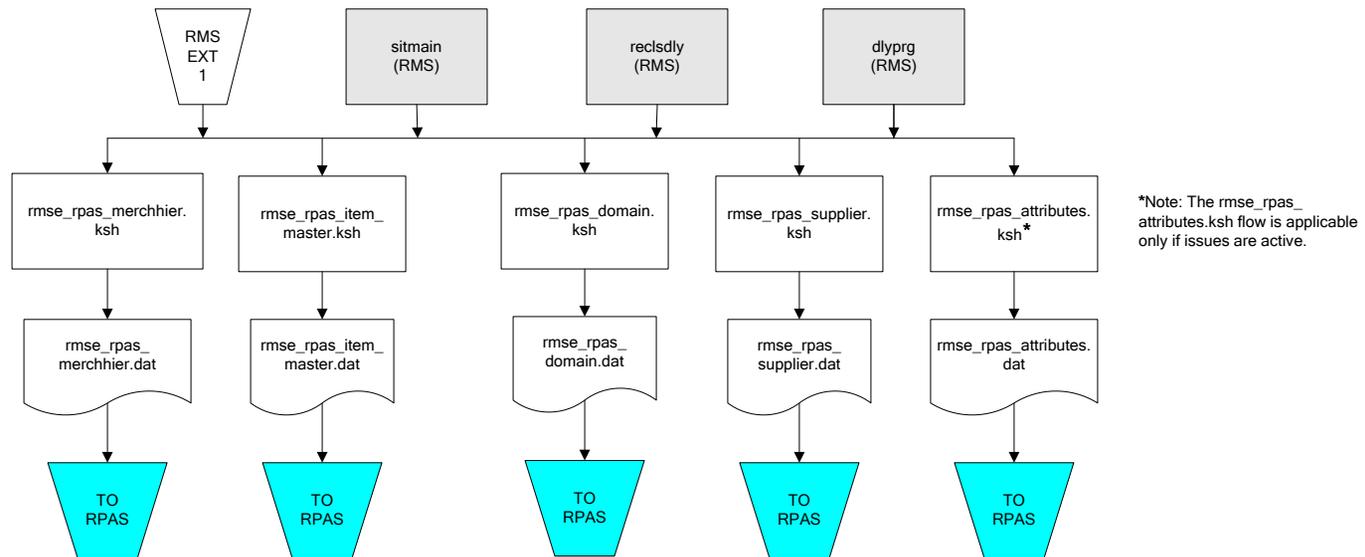

Organization Hierarchy for RPAS

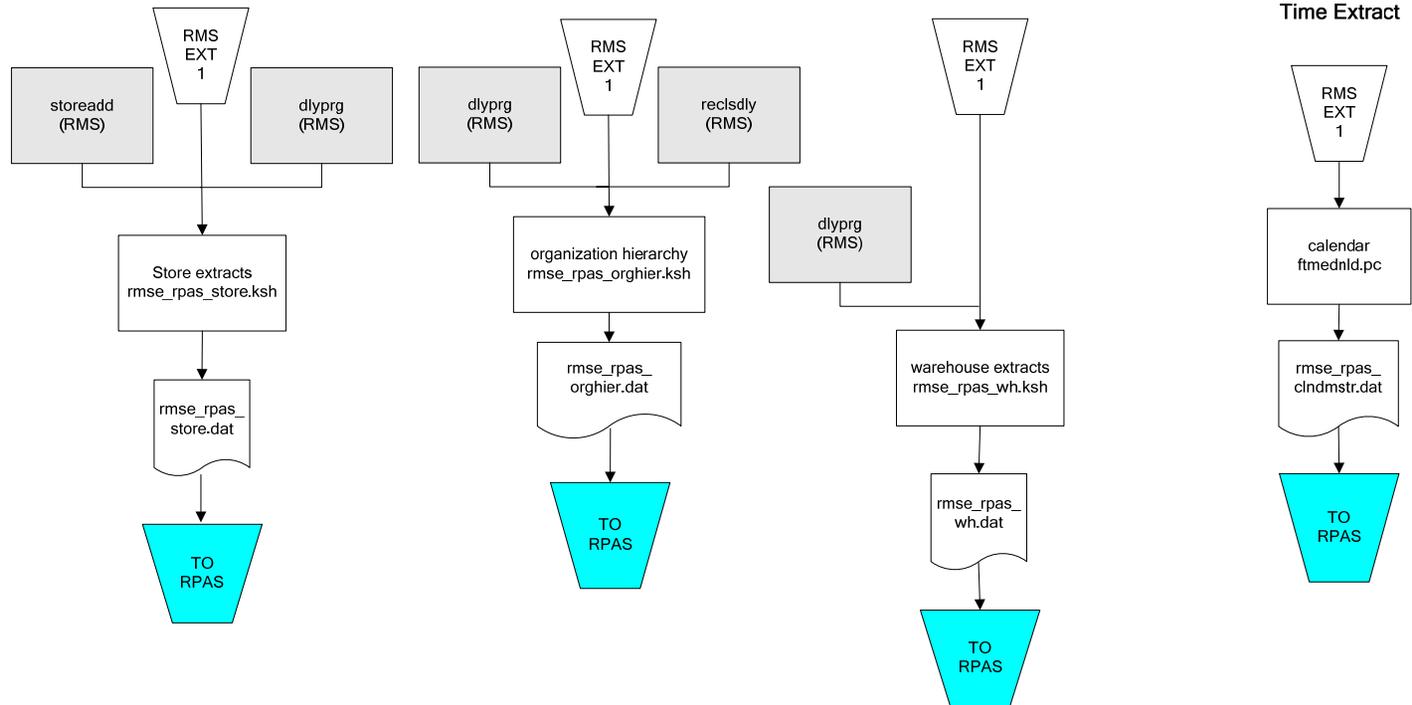


RMS Fact Data Extract Diagrams

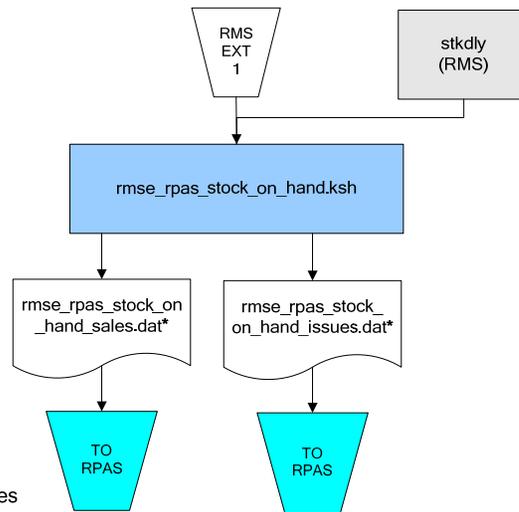

*** Note:**
 If issues are active, the following two files result from the rmse_rpas_stock_on_hand.ksh flow:
 rmse_rpas_stock_on_hand_issues.dat
 rmse_rpas_stock_on_hand_sales.dat


If issues are **not** active, the following file results from the rmse_rpas_stock_on_hand.ksh flow:
 rmse_rpas_stock_on_hand_sales.dat

Sales Extracts For RPAS

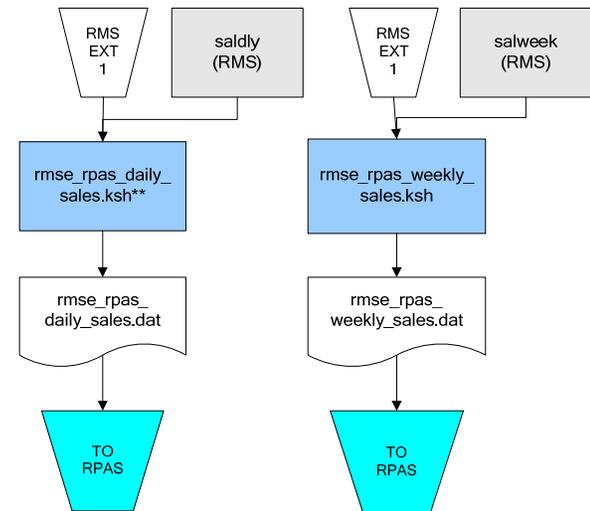

**** Note:**
 Depending upon the configuration of rmse_rpas_daily_sales.ksh, the data can be pulled from TRAN_DATA_HISTORY or TRAN_DATA.

RPAS-RMS Fact Load Diagram

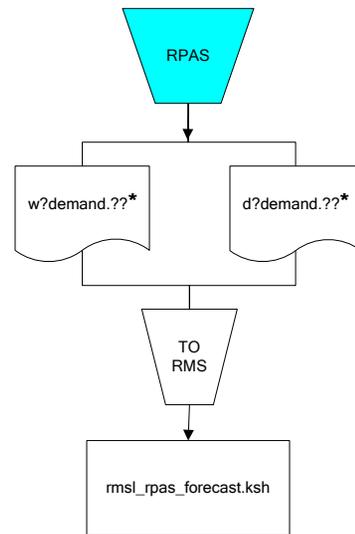

***Note:**

? can represent the following:

- i (for issues)
- s (for stores)

?? represents domain 01-99.

Interface Diagrams for RMS and RDW


RMS works in conjunction with the Oracle Retail Extract Transform and Load (RETL) framework. RETL provides high-performance processing to extract data from Oracle Retail applications for use in data warehouses. The architecture allows database batch processes to take advantage of parallel processing capabilities.

This chapter presents flow diagrams for the RETL extraction RMS programs. The source system's program or output file is illustrated, along with the program or process that interfaces with the source. Note that the data flows are organized according to the logic (dimension data and table data) of Oracle Retail Data Warehouse (RDW), but you can use the data to suit your business needs.

For detailed information about dimensions and facts, see the Oracle Retail Data Warehouse Operations Guide.

For summary information about the configuration, architecture, and features of RETL programs utilized in RMS/ReSA extractions, see the Oracle Retail Merchandising System Operations Guide Volume 3—Backend Configuration and Operations. For more information about the RETL tool, see the current RETL Programmer's Guide.


Legend

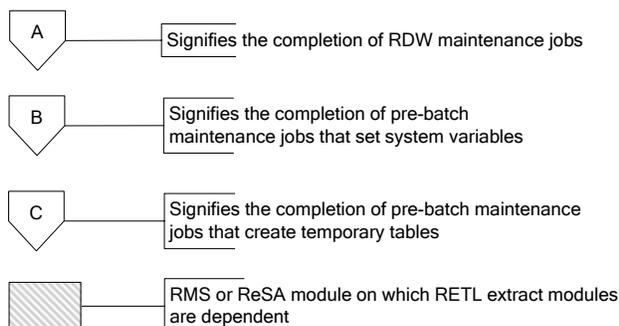


Note:

The modules in this flow are RDW RETL scripts. If the retailer uses RDW, this flow must be completed before starting the pre-batch maintenance flow. If the retailer does not use RDW, these jobs are not required.

RDW Maintenance

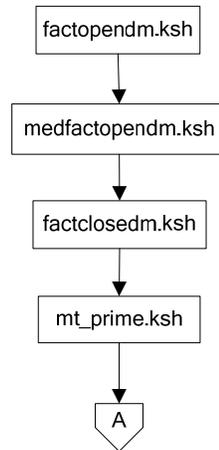


Pre-Batch Maintenance

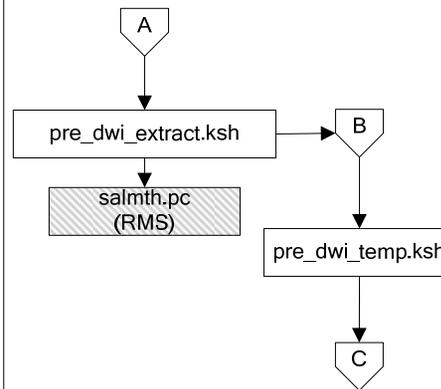


Note:

salmth.pc resets the last eom_date. Thus, it must be run after the system indicator is extracted by pre_dwi_extract.ksh.


Post-Batch Maintenance

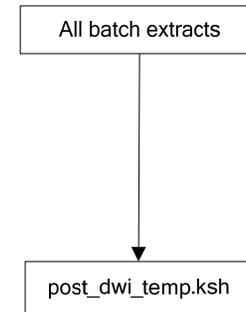


Dimension Dataflows

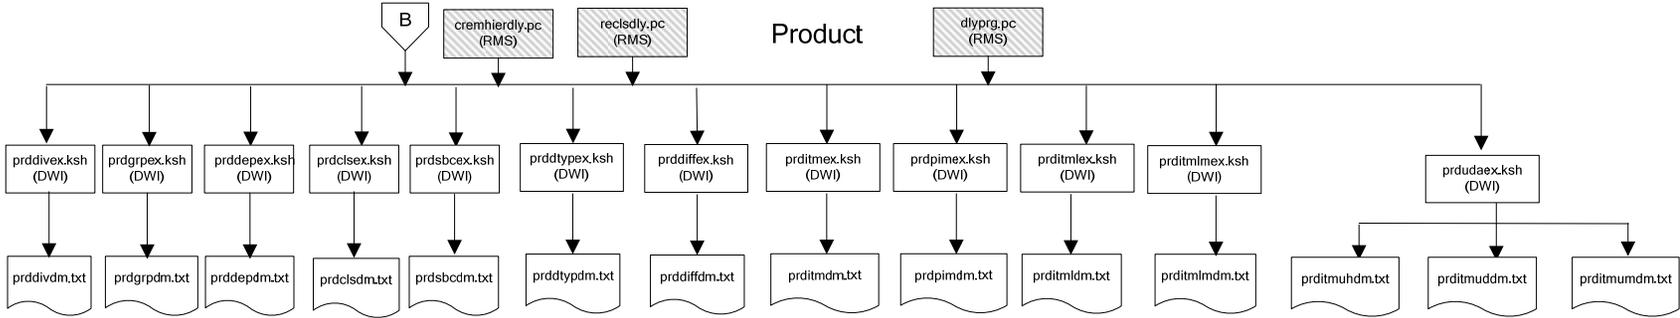


Dimension Dataflows

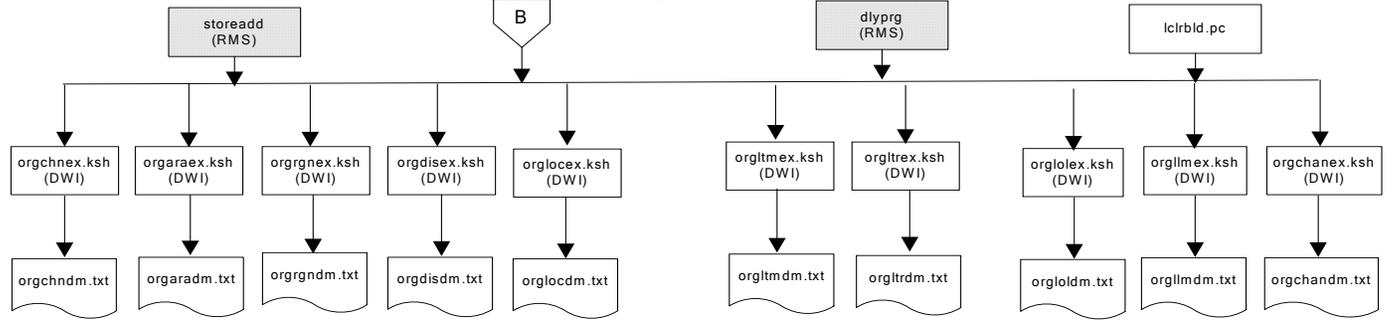


Supplier Dimension

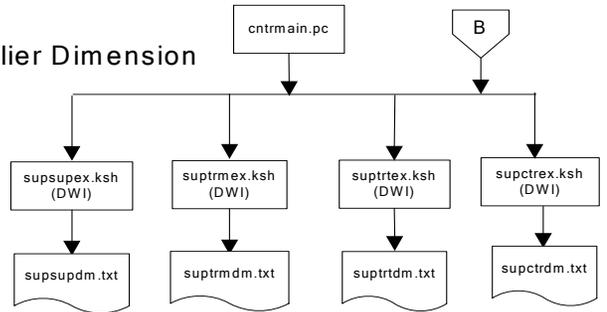

Item-Supplier-Location Matrix Dimension




Dimension Dataflows

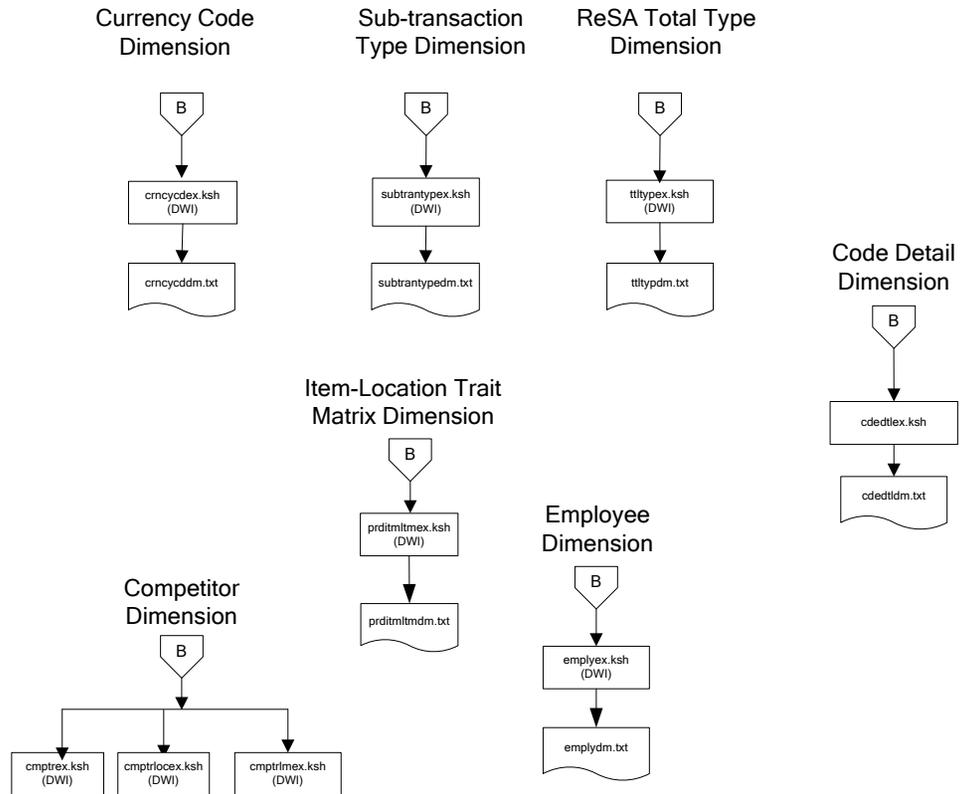


Dimension Dataflows


Product Season Dimension

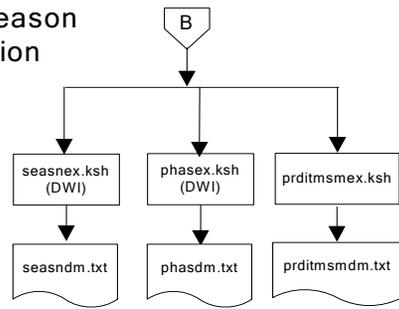


Tender Type Dimension

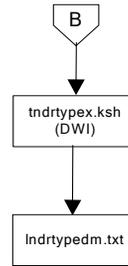



Reason Dimension

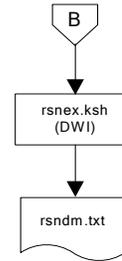


Regionality Dimension

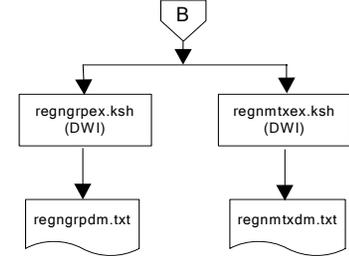


Fact Dataflows

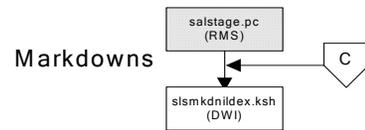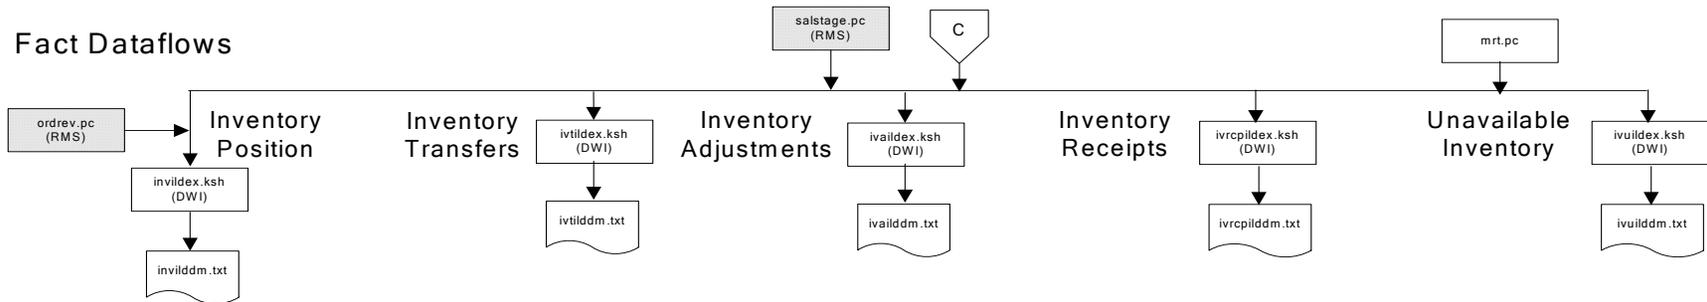

Fact Dataflows


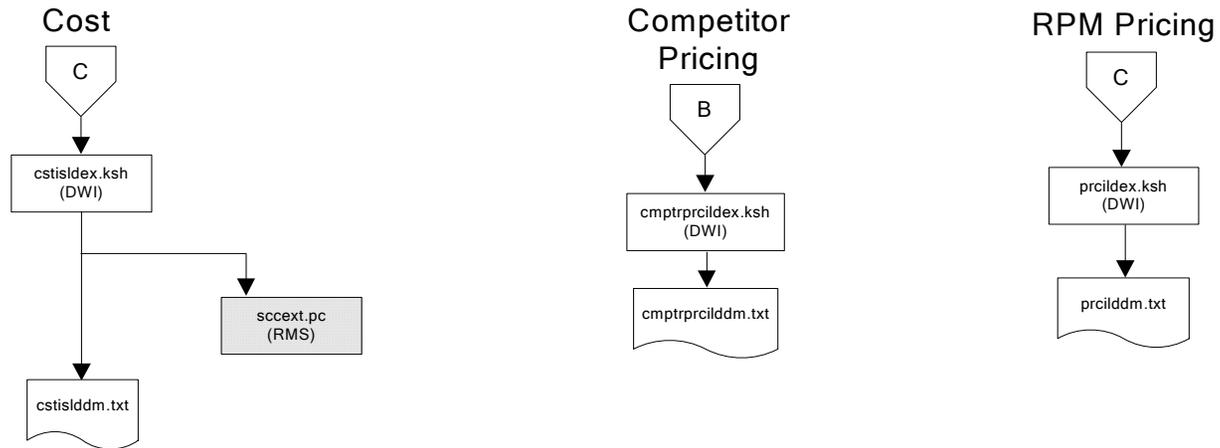


Stock Ledger

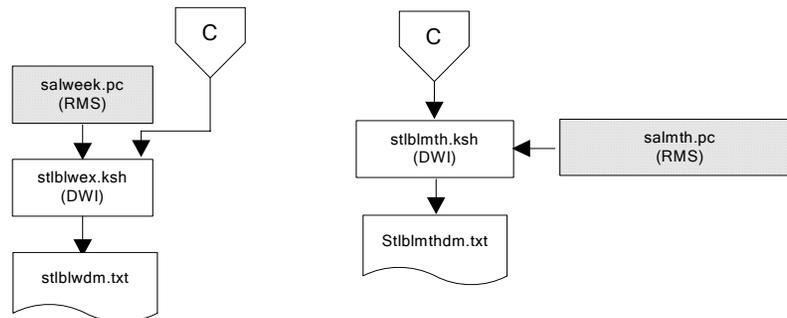


Note:
Run stock ledger fact loads once weekly.


Fact Dataflows

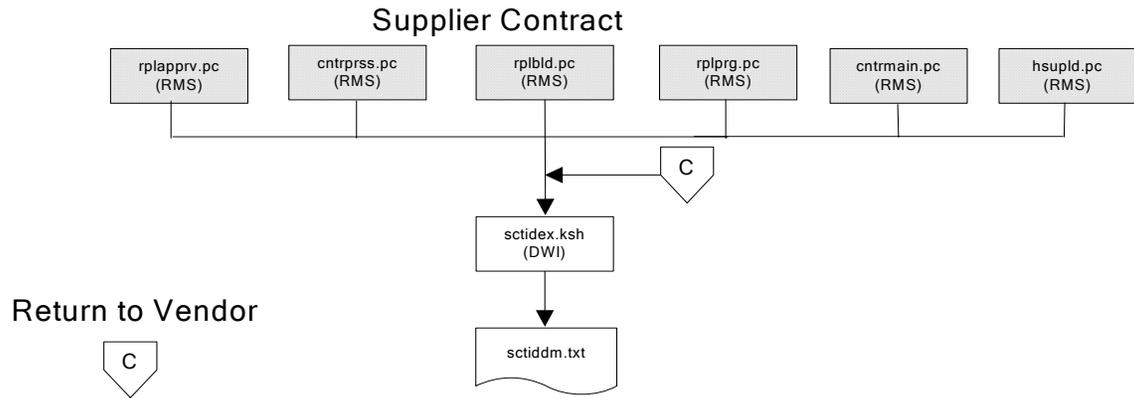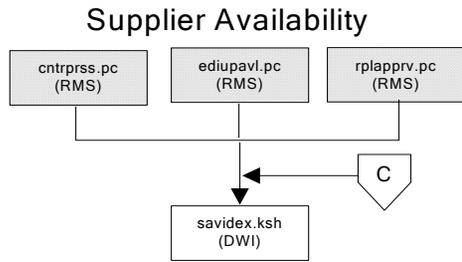

Return to Vendor

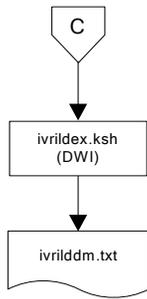


Net Cost

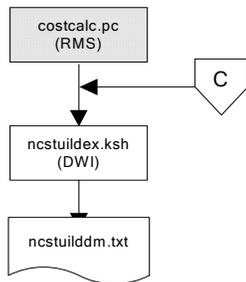


Fact Dataflows

Exchange Rates

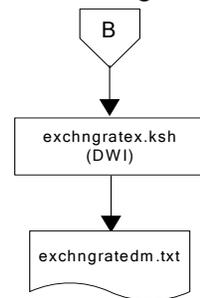


Sales Forecasts

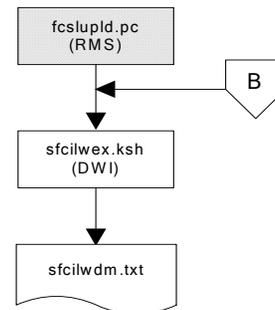


Note:
Run sales forecast fact loads
once weekly.

Fact Dataflows

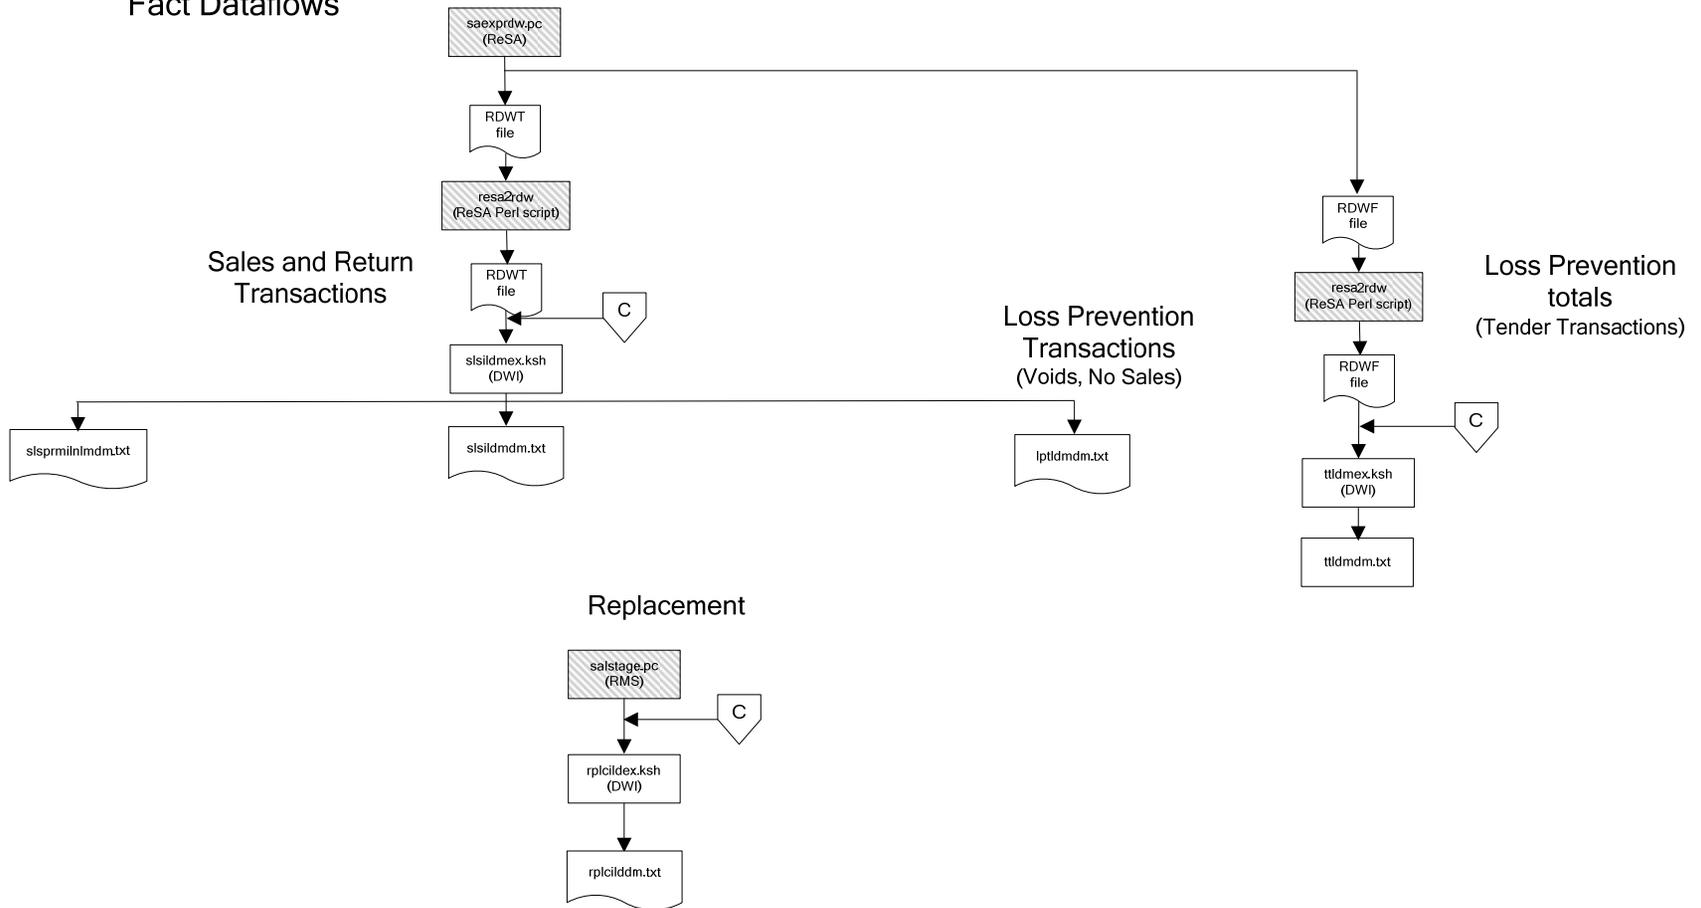


Fact Dataflows

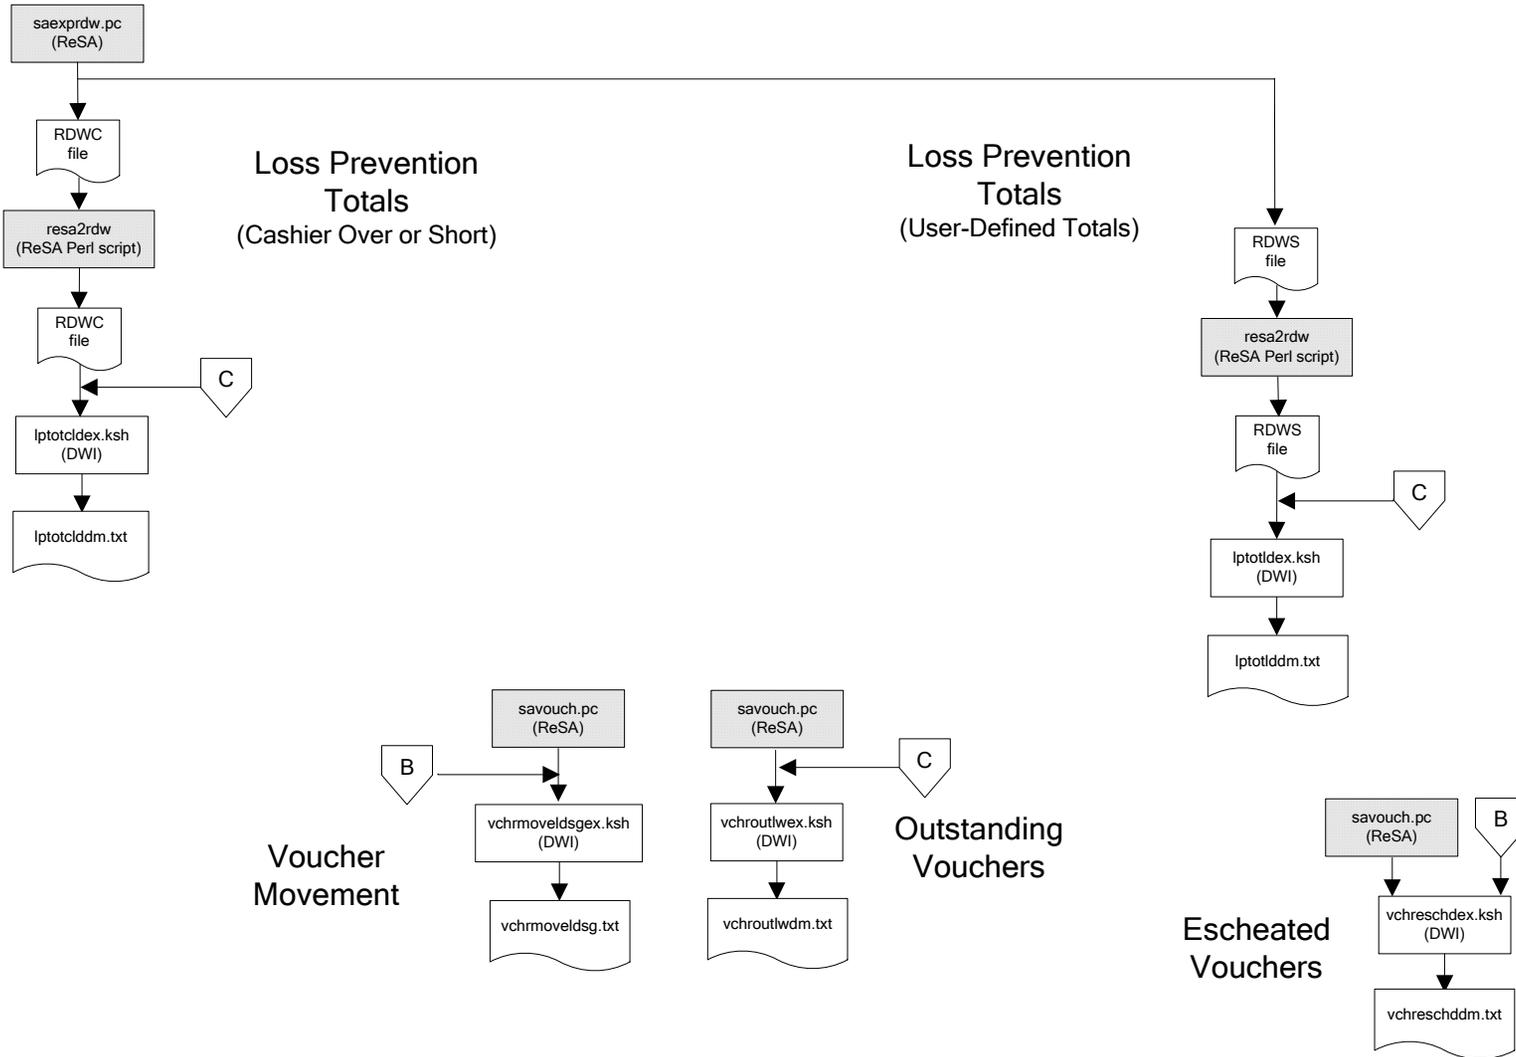

Fact Dataflows

Supplier Compliance

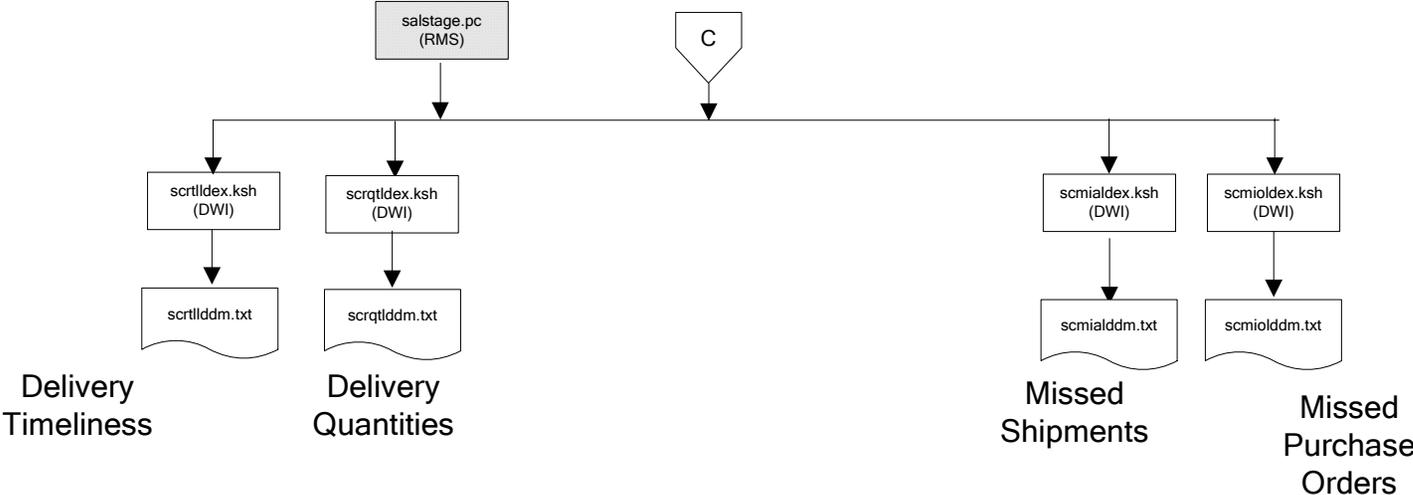


Interface Diagram for RPM and RDW

This following program flow diagram shows the RETL extraction program that extracts the Promotion dimension from RPM through the Data Warehouse Interface (DWI). The diagram shows the output files and the scripts that interface with the source. Note that the outputs are based on the logic (dimension data and table data) of Oracle Retail Data Warehouse (RDW), but you can use the data to suit your business needs.


For detailed information about dimensions and facts, see the Oracle Retail Data Warehouse Operations Guide.


See the Oracle Retail Merchandising System Operations Guide Volume 1—Batch Overviews and Designs for more information about the modules shown in the following diagram.

Legend



Program Flow Diagram

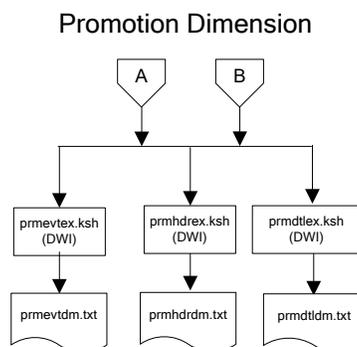

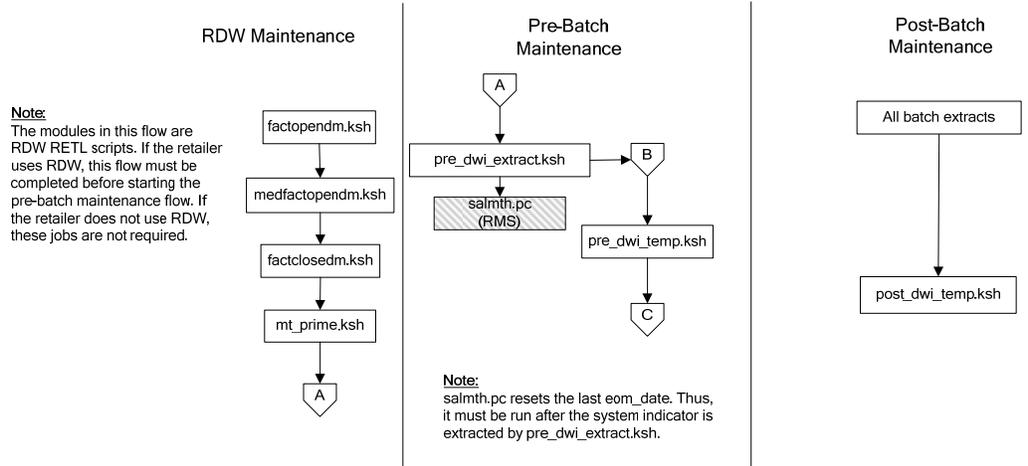


Interface Diagram for ReIM and RDW

This following program flow diagram shows the RETL extraction program that extracts the Promotion dimension from ReIM through the Data Warehouse Interface (DWI). The diagram shows the output files and the scripts that interface with the source. Note that the outputs are based on the logic (dimension data and table data) of Oracle Retail Data Warehouse (RDW), but you can use the data to suit your business needs.


For detailed information about dimensions and facts, see the Retail Data Warehouse Operations Guide.

See the Oracle Retail Merchandising System Operations Guide Volume 1—Batch Overviews and Designs for more information about the modules shown in the following diagram.

Legend

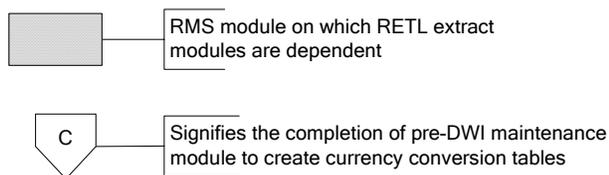


Program Flow Diagram

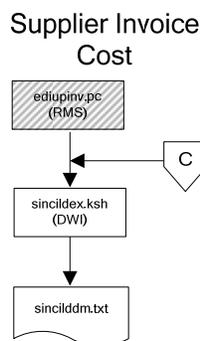


Note:
The modules in this flow are RDW RETL scripts. If the retailer uses RDW, this flow must be completed before starting the pre-batch maintenance flow. If the retailer does not use RDW, these jobs are not required.

RDW Maintenance

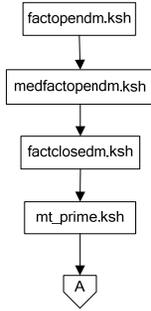

Pre-Batch Maintenance

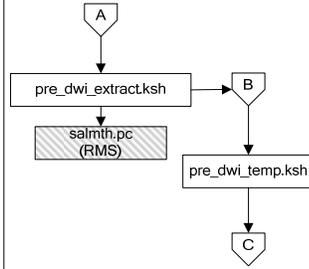

Note:
salmth.pc resets the last eom_date. Thus, it must be run after the system indicator is extracted by pre_dwi_extract.ksh.

Post-Batch Maintenance

