

Oracle® Retail Price Management
Installation Guide
Release 12.0.11

April 2010

Copyright © 2010, Oracle. All rights reserved.

Primary Author: Donna Linde

Contributors: Nathan Young

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this software or related documentation is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation shall be subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License (December 2007). Oracle USA, Inc., 500 Oracle Parkway, Redwood City, CA 94065.

This software is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications which may create a risk of personal injury. If you use this software in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure the safe use of this software. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software in dangerous applications.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

This software and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

Value-Added Reseller (VAR) Language

Oracle Retail VAR Applications

The following restrictions and provisions only apply to the programs referred to in this section and licensed to you. You acknowledge that the programs may contain third party software (VAR applications) licensed to Oracle. Depending upon your product and its version number, the VAR applications may include:

- (i) the software component known as **ACUMATE** developed and licensed by Lucent Technologies Inc. of Murray Hill, New Jersey, to Oracle and imbedded in the Oracle Retail Predictive Application Server – Enterprise Engine, Oracle Retail Category Management, Oracle Retail Item Planning, Oracle Retail Merchandise Financial Planning, Oracle Retail Advanced Inventory Planning, Oracle Retail Demand Forecasting, Oracle Retail Regular Price Optimization, Oracle Retail Size Profile Optimization, Oracle Retail Replenishment Optimization applications.
- (ii) the **MicroStrategy** Components developed and licensed by MicroStrategy Services Corporation (MicroStrategy) of McLean, Virginia to Oracle and imbedded in the MicroStrategy for Oracle Retail Data Warehouse and MicroStrategy for Oracle Retail Planning & Optimization applications.
- (iii) the **SeeBeyond** component developed and licensed by Sun Microsystems, Inc. (Sun) of Santa Clara, California, to Oracle and imbedded in the Oracle Retail Integration Bus application.
- (iv) the **Wavelink** component developed and licensed by Wavelink Corporation (Wavelink) of Kirkland, Washington, to Oracle and imbedded in Oracle Retail Mobile Store Inventory Management.
- (v) the software component known as **Crystal Enterprise Professional and/or Crystal Reports Professional** licensed by SAP and imbedded in Oracle Retail Store Inventory Management.
- (vi) the software component known as **Access Via**TM licensed by Access Via of Seattle, Washington, and imbedded in Oracle Retail Signs and Oracle Retail Labels and Tags.
- (vii) the software component known as **Adobe Flex**TM licensed by Adobe Systems Incorporated of San Jose, California, and imbedded in Oracle Retail Promotion Planning & Optimization application.
- (viii) the software component known as **Style Report**TM developed and licensed by InetSoft Technology Corp. of Piscataway, New Jersey, to Oracle and imbedded in the Oracle Retail Value Chain Collaboration application.
- (ix) the software component known as **DataBeacon**TM developed and licensed by Cognos Incorporated of Ottawa, Ontario, Canada, to Oracle and imbedded in the Oracle Retail Value Chain Collaboration application.

You acknowledge and confirm that Oracle grants you use of only the object code of the VAR Applications. Oracle will not deliver source code to the VAR Applications to you. Notwithstanding any other term or condition of the agreement and this ordering document, you shall not cause or permit alteration of any VAR Applications. For purposes of this section, “alteration” refers to all alterations, translations, upgrades, enhancements, customizations or modifications of all or any portion of the VAR Applications including all reconfigurations, reassembly or reverse assembly, re-engineering or reverse engineering and recompilations or reverse compilations of the VAR Applications or any derivatives of the VAR Applications. You acknowledge that it shall be a breach of the agreement to utilize the relationship, and/or confidential information of the VAR Applications for purposes of competitive discovery.

The VAR Applications contain trade secrets of Oracle and Oracle’s licensors and Customer shall not attempt, cause, or permit the alteration, decompilation, reverse engineering, disassembly or other reduction of the VAR Applications to a human perceivable form. Oracle reserves the right to replace, with functional equivalent software, any of the VAR Applications in future releases of the applicable program.

Contents

Send Us Your Comments	vii
Preface	ix
Audience	ix
Related Documents	ix
Customer Support	ix
Review Patch Documentation	ix
Oracle Retail Documentation on the Oracle Technology Network	x
Conventions	x
1 Preinstallation Tasks	1
Check Database Server Requirements	1
Check Application Server Requirements	2
Check Oracle Retail Software Dependencies	2
Supported Oracle Retail Products	3
Supported Oracle Retail Integration Technologies	3
Check Third-Party Software Dependencies	3
Check Client PC and Web Browser Requirements	3
2 RAC and Clustering	5
3 Database Installation Tasks	7
RPM Schema	7
RSM Schema	7
4 Application Installation	9
Upgrade Oracle Application Server 10g	9
Create a New OC4J Instance and Group for RPM	9
Configure Apache for JNLP Files	10
Expand the RPM Application Distribution	10
Provide the Hibernate Jar File	10
Clustered Installations – Preinstallation Steps	11
Run the RPM Application Installer	11
Resolving Errors Encountered During Application Installation	12
Clustered Installations – Post-Installation Steps	12
Manual Deployment Option	13
Sign the RPM Client Configuration Jar File	14
Backups Created by Installer	14
Test the RPM Application	14
RPM Batch Scripts	15
Web Help Files	15
Re-Generating JMS Bindings with BinEGateJMSQueue.jar	15
A Appendix: RPM Application Installer Screens	17

B Appendix: Installer Silent Mode	35
Repeating an Installation Attempt.....	35
C Appendix: Common Installation Errors.....	37
SeeBeyond JMS Unavailable.....	37
Keystore Errors When Signing rpm_client_config.jar	37
Unreadable Buttons in the Installer	37
“Unable to get a deployment manager” Message	38
Left-Side Menu Buttons Missing in RPM Client.....	38
“Could not create system preferences directory” Warning	38
ConcurrentModificationException in Installer GUI.....	39
“Couldn't find X Input Context” Warnings	39
Error while unpacking the rpm12.ear	39
D Appendix: URL Reference	41
JDBC URL for a Database	41
HTTP URL for a WebStart Client.....	41
JNDI Provider URL for an Application	41
Deployer URI.....	42
E Appendix: Configuration Files	43
Oracle Application Server Resource Configuration.....	43
jms.xml	43
oc4j-connectors.xml	43
RPM Application Deployment Descriptors	44
application.xml (J2EE standard)	44
orion-application.xml (OC4J proprietary)	44
oc4j-connectors.xml (OC4J proprietary)	44
data-sources.xml (OC4J proprietary)	45
ra.xml (J2EE standard)	46
oc4j-ra.xml (OC4J proprietary).....	46
RPM Application Configuration Files – Server Side.....	47
rpm.properties.....	47
jndi_providers.xml	47
log4j.xml.....	47
RPM Application Configuration Files – Batch Client Side.....	48
launchRpmBatch.sh.....	48
RPM Application Configuration Files – GUI Client Side	48
rpm.jnlp.....	48
rpmconfig.jnlp	48

Send Us Your Comments

Oracle Retail Price Management, Installation Guide, Release 12.0.11

Oracle welcomes customers' comments and suggestions on the quality and usefulness of this document.

Your feedback is important, and helps us to best meet your needs as a user of our products. For example:

- Are the implementation steps correct and complete?
- Did you understand the context of the procedures?
- Did you find any errors in the information?
- Does the structure of the information help you with your tasks?
- Do you need different information or graphics? If so, where, and in what format?
- Are the examples correct? Do you need more examples?

If you find any errors or have any other suggestions for improvement, then please tell us your name, the name of the company who has licensed our products, the title and part number of the documentation and the chapter, section, and page number (if available).

Note: Before sending us your comments, you might like to check that you have the latest version of the document and if any concerns are already addressed. To do this, access the new Applications Release Online Documentation CD available on My Oracle Support and www.oracle.com. It contains the most current Documentation Library plus all documents revised or released recently.

Send your comments to us using the electronic mail address: retail-doc_us@oracle.com

Please give your name, address, electronic mail address, and telephone number (optional).

If you need assistance with Oracle software, then please contact your support representative or Oracle Support Services.

If you require training or instruction in using Oracle software, then please contact your Oracle local office and inquire about our Oracle University offerings. A list of Oracle offices is available on our Web site at www.oracle.com.

Preface

Oracle Retail Installation Guides contain the requirements and procedures that are necessary for the retailer to install Oracle Retail products.

Audience

This Installation Guide is written for the following audiences:

- Database administrators (DBA)
- System analysts and designers
- Integrators and implementation staff

Related Documents

For more information, see the following documents in the Oracle Retail Price Management Release 12.0.11 documentation set:

- *Oracle Retail Price Management Release Notes*
- *Oracle Retail Price Management Data Model*
- *Oracle Retail Merchandising Batch Schedule*

Customer Support

To contact Oracle Customer Support, access My Oracle Support at the following URL:

<https://support.oracle.com>

When contacting Customer Support, please provide the following:

- Product version and program/module name
- Functional and technical description of the problem (include business impact)
- Detailed step-by-step instructions to re-create
- Exact error message received
- Screen shots of each step you take

Review Patch Documentation

When you install the application for the first time, you install either a base release (for example, 12.0) or a later patch release (for example, 12.0.10). If you are installing the base release and additional patch and bundled hot fix releases, read the documentation for all releases that have occurred since the base release before you begin installation.

Documentation for patch and bundled hot fix releases can contain critical information related to the base release, as well as information about code changes since the base release.

Oracle Retail Documentation on the Oracle Technology Network

Documentation is packaged with each Oracle Retail product release. Oracle Retail product documentation is also available on the following Web site:

http://www.oracle.com/technology/documentation/oracle_retail.html

(Data Model documents are not available through Oracle Technology Network. These documents are packaged with released code, or you can obtain them through My Oracle Support.)

Documentation should be available on this Web site within a month after a product release.

Conventions

Navigate: This is a navigate statement. It tells you how to get to the start of the procedure and ends with a screen shot of the starting point and the statement “the Window Name window opens.”

This is a code sample

It is used to display examples of code

Preinstallation Tasks

RPM is a client-server-server application. Its client side code runs in a WebStart Java Virtual machine instance, while its server side code runs in the Oracle Application Server and accesses an Oracle Database server.

Check Database Server Requirements

General Requirements for a database server running Oracle Retail Price Management include:

Supported on:	Versions Supported:
Database Server OS	OS certified with Oracle Database 10g Enterprise Edition. Options are: ▪ AIX 5.3 ▪ Solaris 10 SPARC (Actual hardware or Logical Domains) ▪ HP-UX 11.23 (PA-RISC) ▪ Oracle Enterprise Linux 4 Update 4 (OEL 4.4) for x86-64 ▪ Oracle Enterprise Linux 5 Update 3 (OEL 5.3) for x86-64 ▪ RedHat Enterprise Linux 4 Update 4 (RHEL 4.4) for x86-64 ▪ RedHat Enterprise Linux 5 Update 3 (RHEL 5.3) for x86-64
Database Server	Oracle Database 10g Release 2 Enterprise Edition (minimum 10.2.0.4.0 patchset required) with the following patches and components: Patches: ▪ 10.2.0.4 patchset (6810189) ▪ AIX Only oneoff 6154596 - When trying to compile Proc*C program it fails on AIX5 Database Vault specific patches: ▪ 7639262 - TDE oneoff ▪ 5945647 – Export oneoff - Available on AIX and Solaris Sparc (it is important to complete all steps of this patch) Components: ▪ Oracle Database 10g ▪ Oracle Partitioning ▪ Oracle Net Services ▪ Oracle Call Interface (OCI) ▪ Oracle Programmer ▪ Oracle XML Development Kit ▪ DBConsole if Database Vault is installed. Perl compiler 5.0 or later x-Windows interface

Note: The RPM database objects are bundled with the RMS database schema installer. For Release 12.0.11, RPM supports the following options for enhanced data security:

- RPM 12.0.11 supports enhanced data protection using Oracle Database Vault with Oracle Database 10g Release 2.
- Oracle Retail Sales Audit (ReSA) 12.0.11 supports transparent data encryption (TDE) with Oracle Database 10g Release 2 and the Advanced Security option.

See the *Oracle Retail Merchandising System Installation Guide* for more information about using these security options.

Check Application Server Requirements

General requirements for an application server capable of running the RPM application include:

Supported on:	Versions Supported:
Application Server OS	OS certified with Oracle Application Server 10g 10.1.3.4. Options are: ▪ AIX 5.3 ▪ Solaris 10 SPARC (Actual hardware or Logical Domains) ▪ HP-UX 11.23 (PA-RISC) ▪ Oracle Enterprise Linux 4 Update 4 (OEL 4.4) for x86-64 ▪ Oracle Enterprise Linux 5 Update 3 (OEL 5.3) for x86-64 ▪ RedHat Enterprise Linux 4 Update 4 (RHEL 4.4) for x86-64 ▪ RedHat Enterprise Linux 5 Update 3 (RHEL 5.3) for x86-64
Application Server	Oracle Application Server 10g 10.1.3.4 with the following patches: ▪ 5632264 (NEED UPDATED TIMEZONE FILES (VERSION 4) FOR MORE DST RULE CHANGES) ▪ 4601861 (NEED TO EXPOSE NZOS_SETIOSEMANTICS)

Note: This release of RPM is only supported in a managed OC4J instance as part of OracleAS 10g. It is not supported on OC4J standalone

Check Oracle Retail Software Dependencies

- RMS 12.0.11 must be installed prior to installing RPM.
- Security Manager (RSM) 12.0.4 must be installed prior to installing RPM.
- An eGate JMS server for the RPM task queue. The eGate JMS used by the RIB or a separate eGate JMS can be used for this. The JMS server must be running at the time of the RPM application installation. RPM application deployment will fail if JMS is down.

Supported Oracle Retail Products

Requirement	Version
Oracle Retail Merchandising System (RMS)/Oracle Retail Trade Management (RTM)/Oracle Retail Sales Audit (ReSA)	12.0.11
Oracle Retail Allocation	12.0.11
Oracle Retail Data Warehouse (RDW)	12.0.10
Oracle Retail Store Inventory Management (SIM)	11.1.1 (at a minimum)
Oracle Retail Security Manager (RSM)	12.0.4

Supported Oracle Retail Integration Technologies

Requirement	Version
Oracle Retail Extract, Transform and Load (RETL)	12.0.9
Oracle Retail Integration Bus (RIB)	12.0.11
Oracle Retail Service Layer (RSL)	12.0.11

Check Third-Party Software Dependencies

- Hibernate 2.1.8 must be downloaded and the hibernate2.jar file just be extracted. The RPM application installation procedure specifies how to install this file.

Check Client PC and Web Browser Requirements

Requirement	Version
Operating system	Windows 2000 or XP
Display resolution	1024x768 or higher
Processor	1GHz or higher
Memory	512MBytes or higher
Networking	intranet with at least 10Mbps data rate
Sun Java Runtime Environment	5.0 Update 11 or newer (1.5.0_11)
Browser	Microsoft Internet Explorer 7.0

RAC and Clustering

Real Application Cluster Database and Oracle Application Server Clustering for Oracle Retail Price Matching has been validated to run only on Linux:

The Oracle Retail products have been validated against a 10.2.0.3 RAC database. When using a RAC database, all JDBC connections should be configured to use OCI connections rather than THIN connections. It is suggested that when using OCI connections, the Oracle Retail products database be configured in the tnsnames.ora file used by the Oracle Application Server installations.

Clustering for Oracle Application Server 10.1.3 is managed as an Active-Active cluster accessed through a hardware Load Balancer. It is suggested that a VirtualHost be added to the OAS 10.1.3 reflecting the Virtual Server Name configured in the load balancer. It is also suggested that the OC4J select method be configured to prefer the use of local OC4J instances. The Oracle Retail products are currently not validated to be distributable at the application level in an OAS 10.1.3 cluster.

Clustering for Oracle Application Server 10.1.2.0.2 is managed as an Active-Active cluster accessed through a hardware Load Balancer. It is suggested that the Web Cache installation included with OAS 10.1.2.0.2 be configured to reflect all application server Mid-Tier installations. Validation has been completed utilizing a RAC 10.2.0.3 Oracle Internet Directory database with the OAS 10.1.2.0.2 cluster.

References for Configuration:

- Oracle® Application Server High Availability Guide 10g Release 3 (10.1.3) Part Number B15977-02
- Oracle® Application Server High Availability Guide 10g Release 2 (10.1.2) Part Number B14003-05
- Oracle® Database Oracle Clusterware and Oracle Real Application Clusters Administration and Deployment Guide 10g Release 2 (10.2) Part Number B14197-03

Database Installation Tasks

RPM Schema

The RPM database tables are installed with the RMS database schema. RMS 12.0.11 is a prerequisite of the RPM 12.0.11 installation.

RSM Schema

The RSM 12.0.4 application is a prerequisite of RPM 12.0.11. There were no database updates to RSM for this release.

Application Installation

These instructions apply to new installations and upgrades. If you are upgrading a previous 12.0.x installation, the application installer upgrades the application and back up certain files from the previous installation (See Backups Created by the Installer from this section). To ensure that the previous installation is properly undeployed, you must provide the same application deployment name as the previous installation.

Before proceeding you must install Oracle Application Server 10g 10.1.3.4 plus the patches listed in Chapter 1 of this document. The RPM application will be deployed to an OC4J instance within the OracleAS10g installation.

It is assumed Oracle Database has already been configured and loaded with the appropriate RMS schema for your installation.

Upgrade Oracle Application Server 10g

The RPM 12.0.11 release requires an upgrade of the application server from 10.1.3.0 to 10.1.3.4. Before running the RPM 12.0.11 application installer you need to patch your Oracle Application Server up to version 10.1.3.4 plus the patches listed in Chapter 1 of this document.

Create a New OC4J Instance and Group for RPM

Skip to the next section if you are redeploying to an existing OC4J group in Oracle Application Server 10.1.3.4.

The RPM application must be deployed to its own dedicated OC4J group. For instructions on how to create a new OC4J group and instance(s), see Adding and Deleting OC4J Instances in the Reconfiguring Application Server Instances chapter of the *Oracle Application Server Administrator's Guide*.

1. Log into the server which is running your OracleAS10g installation. Set your ORACLE_HOME environment variable to point to this installation.
2. Choose a name for the new OC4J instance and group.

Example: rpm-oc4j-instance

rpm_group

Create this OC4J instance and group as documented in the Oracle Application Server Administrator's Guide.

Example:

\$ORACLE_HOME/bin/createinstance

-instanceName rpm-oc4j-instance -groupName rpm_group

When prompted for the oc4jadmin password, provide the same administrative password you gave for the OracleAS installation. All OC4J instances running Oracle Retail applications must have the same oc4jadmin password.

3. Start the OC4J instance. You can do this through the Enterprise Manager web interface, or on the command line using the opmnctl utility:

Example: \$ORACLE_HOME/opmn/bin/opmnctl @cluster
startproc ias-component=rpm_group

4. Verify that the OC4J group was fully started. If you are using the Enterprise Manager web interface, the instance(s) should have a green arrow indicating that they are running. On the command line, verify that each instance has a status of “Alive”.

Example: \$ORACLE_HOME/opmn/bin/opmnctl status

If you are unable to start an OC4J instance after several attempts, try increasing the startup timeouts in ORACLE_HOME/opmn/conf/opmn.xml. If that does not help, consult the Oracle Application Server documentation for further assistance.

Configure Apache for JNLP Files

If this is the first WebStart application that is being installed in the HTTP server, you need to configure the **mime.types** file with the jnlp file type. If you are using the Apache distribution that is included with OracleAS, this file can be found under ORACLE_HOME/Apache/Apache/conf. Add the following line to the file:

```
application/x-java-jnlp-file          jnlp
```

Restart the Apache server for this change to take effect. If you do not add this line then jnlp files will be served as plain text and you will not be able to launch the application.

Example: \$ORACLE_HOME/opmn/bin/opmnctl
restartproc process-type=HTTP_Server

Expand the RPM Application Distribution

1. Log into the UNIX server as the user who owns the OracleAS 10g installation. Create a new staging directory for the RPM application distribution (rpm12application.zip). There should be a minimum of 160 MB disk space available for the application installation files.

Example: \$ORACLE_HOME/j2ee/rpm-oc4j-instance/rpm-
staging

This location is referred to as INSTALL_DIR for the remainder of this chapter.

2. Copy rpm12application.zip to INSTALL_DIR and extract its contents.

Provide the Hibernate Jar File

The RPM application requires the hibernate2.jar file to be installed. This file should be downloaded from <http://www.hibernate.org> and placed in the INSTALL_DIR/rpm/application/hibernate folder before the installer is launched. For RPM 12, Hibernate 2.1.8 should be used. You need to download the Hibernate distribution and extract the hibernate2.jar file from it.

The RPM application installer verifies that hibernate2.jar has been provided and that it is the correct version. If hibernate2.jar is missing or incorrect, the installer will not proceed.

The installer applies hibernate2.jar to the RPM application by placing it under the ORACLE_HOME/j2ee/<oc4j-instance-name>/applications/<app-name>/lib directory.

Clustered Installations – Preinstallation Steps

Skip this section if you are not clustering the application server.

Note: Previous releases of RPM required the OC4J instance names and OC4J group name to be identical. This is no longer the case, as OC4J grouping has changed between OAS 10.1.3.0 and 10.1.3.4.

If you are installing the RPM application to a clustered Oracle Application Server environment, there are some extra steps you need to take before running the RPM application installer. In these instructions, the application server node whose ORACLE_HOME you used for the RPM installer is referred to as the *master node*. All other nodes are referred to as the *remote nodes*.

1. On each node, create the RPM task queue and factories in the OC4J JMS server by modifying the \$ORACLE_HOME/j2ee/<rpmoc4jinstance>/config/jms.xml file. At the bottom of this file, before the closing </jms-server> tag, add the definition for the RPM task queue.

Example with rpmTaskQueue as the queue name:

```
<queue name="rpmTaskQueue" location="jms/rpmTaskQueue"
  Persistence-file= »rpmTaskQueue.persistence.file »>
  <description>RPM Task Engine Queue</description>
</queue>
<queue-connection-factory location= »jms/Queue/myQCF » />
<xa-queue-connection-factory location= »jms/Queue/myXAQCF » />
</jms-server>
```

The RPM application installer asks you for this queue name. You must provide the same queue name that you used in jms.xml, without the jms/ prefix.

Example: rpmTaskQueue

2. On each node, create the RPM XA wrapper object for the task queue by modifying \$ORACLE_HOME/j2ee/<rpmoc4jinstance>/config/oc4j-connectors.xml. Nested within the OracleASjms connector, add this adminobject-config element:

```
<adminobject-config location="OracleASjms/rpmTaskQueue">
  <adminobject-
class>oracle.j2ee.ra.jms.generic.AdminObjectQueueImpl</adminobject-class>
  <config-property name="jndiName" value="jms/rpmTaskQueue"/>
  <config-property name="resourceProviderName" value="oc4jjms"/>
</adminobject-config>
```

3. All of the OC4J instances in the group should be restarted for the jms.xml and oc4j-connectors.xml changes to be picked up. Deployment of the RPM ear file will fail if the JMS queue cannot be found by OC4J.

Example: \$ORACLE_HOME/opmn/bin/opmnctl @cluster
restartproc ias-component=rpm_group

Run the RPM Application Installer

Once you have an OC4J instance that is configured and started, you can run the RPM application installer. This installer configures and deploys the RPM application and Java WebStart client files.

Note: Appendix A contains details on every screen and field in the application installer.

1. Make sure that the eGate JMS server is running. This server is needed for the task queue used by the RPM application. The application server verifies the JMS connection during deployment of the RPM ear file, and the deployment will fail if it cannot connect.
2. Change directories to `INSTALL_DIR/rpm/application`.
3. Set the `ORACLE_HOME` and `JAVA_HOME` environment variables. `ORACLE_HOME` should point to your OracleAS installation. `JAVA_HOME` should point to the Java 5.0 (1.5.0) JDK located at `$ORACLE_HOME/jdk`.
4. If you are using an X server such as Xceed, set the `DISPLAY` environment variable so that you can run the installer in GUI mode (recommended). If you are not using an X server, or the GUI is too slow over your network, unset `DISPLAY` for text mode.
5. Run the `install.sh` script. This launches the installer. After installation is complete, a detailed installation log file is created: `rpm12install.<timestamp>.log`.

Resolving Errors Encountered During Application Installation

If the application installer encounters any errors, it halts execution immediately. You can run the installer in silent mode so that you don't have to retype the settings for your environment. See Appendix B of this document for instructions on silent mode.

See Appendix C of this document for some common installation errors.

Since the application installation is a full reinstall every time, any previous partial installs are overwritten by the successful installation.

Clustered Installations – Post-Installation Steps

If you are installing the RPM application to a clustered Oracle Application Server environment, there are some extra steps you need to take to complete the installation. In these instructions, the application server node whose `ORACLE_HOME` you used for the RPM installer is referred to as the *master node*. All other nodes are referred to as the *remote nodes*.

1. The RPM client files should be copied from the master node to each of the remote nodes under the same path as on the master node. For example, you should take the files under `$ORACLE_HOME/Apache/Apache/rpm` and copy them onto the remote nodes under the same path.
2. All `jnlp` files in the RPM client need to be modified so that the correct host name is used on each node.
3. The RPM batch files should be copied from the master node to each of the remote nodes under the same path as on the master node. You should take the `$ORACLE_HOME/j2ee/<rpminstance>/rpm-batch` directory and copy it onto the remote nodes under the same path.
4. The `launchRpmBatch.sh` script should be modified on each remote node to point to the local RPM instance. The RPM URL is set in the `PROVIDER_URL` variable. This script is located at `$ORACLE_HOME/j2ee/<rpminstance>/rpm-batch/scripts/launchRpmBatch.sh`.
5. By default, after installation all remote RPM instances are pointing to the RSM install on the master node. Update the RSM URL in the `jndi_providers.xml` file on each remote node so that each RPM instance uses its own local RSM instance. This file is located at `$ORACLE_HOME/j2ee/<oc4jinstance>/applications/<rpmappname>/conf/retek/jndi_providers.xml`.

6. All of the OC4J instances in the group should be restarted for the `jndi_providers.xml` changes to be picked up.

Example: `$ORACLE_HOME/opmn/bin/opmnctl @cluster
restartproc ias-component=rpm_group`

Manual Deployment Option

Skip this section if you chose the default option of allowing the installer to complete installation to the application server.

The installer includes the option to configure the application locally and skip deployment to the application server. If this option is chosen, the installer makes the configured application files available under `<INSTALL_DIR>/rpm/application/rpm12/configured-output/`.

If you chose this installer option, you can complete the installation by following these steps:

1. Make sure there have not been any application server configuration changes since the installer was run. You can do this by comparing the backup files created by the installer in the staging area to the same files in the application server.

Example: `diff <INSTALL_DIR>/rpm/application/rpm12
/configured-
output/appserver/ORACLE_HOME/j2ee/myinstance/conf
ig/jms.xml.200610300919
$ORACLE_HOME/j2ee/myinstance/conf/jms.xml`

If there are changes to the application server's configuration file, they should be merged into the local copy under `configured-output` before proceeding to the next step.

2. Inspect the contents of the `<INSTALL_DIR>/rpm/application/rpm12/configured-output/appserver/ORACLE_HOME` directory, and then overlay the files in the application server's `ORACLE_HOME`, using the same directory structure. This installs library files required by the application and required application server configuration changes.
3. Restart the OC4J instance(s) where RPM will be deployed.

Example: `$ORACLE_HOME/opmn/bin/opmnctl
restartproc ias-component=rpm_group`

4. Deploy the RPM ear file to the OC4J group using the Enterprise Manager web interface. The configured ear file is located at `<INSTALL_DIR>/rpm/application/rpm12/configured-output/rpm12.ear`. When deploying the ear file, you should provide the same application name you gave to the installer. These values were stored in the `<INSTALL_DIR>/rpm/application/ant.install.properties` file by the installer for later reference.

Sign the RPM Client Configuration Jar File

There is some client-side configuration that the installer performs which results in a modified `rpm_client_config.jar` file after installation. Because of this, the jar file cannot be pre-signed by Oracle. The user must sign this jar file after the installer has completed.

To create an example key called “foo”, the following command can be run:

```
$JAVA_HOME/bin/keytool -genkey -alias foo
```

This command prompts you for a keystore password along with organizational info.

Once complete, the keystore alias resides in the default location in the user’s home directory (ie `~/.keystore`). If you get an error message saying that the keystore has been tampered with, try renaming or deleting the `~/.keystore` file and running the `keytool` command again.

If during execution of the installer you chose to manually copy the client files to the HTTP server, you should do so before signing the `rpm_client_config.jar` file.

The `rpm_client_config.jar` is located on the HTTP server under the ‘lib’ subdirectory of the RPM client destination directory. To sign the `rpm_client_config.jar` file using your alias and keystore, run the `jarsigner` utility.

Example: `$JAVA_HOME/bin/jarsigner
rpm_client_config.jar foo`

If you are clustering the application server you need to copy the signed `rpm_client_config.jar` file to the same path under `$ORACLE_HOME` on all remote nodes.

Consult the “jarsigner” documentation from Sun for further information on the JAR signing process.

Backups Created by Installer

The RPM application installer backs up previous batch, JMS bindings, and WebStart client installations by renaming them with `<timestamp>` suffixes. This is done to prevent the removal of any custom changes you might have. These backup directories can be safely removed without affecting the current installation.

Examples: `rpm-batch.200605011726,
sbynjndi.200605011726, rpm.200605011726`

Test the RPM Application

After the application installer completes you should have a working RPM application installation. To launch the application client, open a web browser and go to the `rpm.jnlp` file under the HTTP URL you provided during the installation.

Example: <http://myhost:7777/rpm/rpm.jnlp>

RPM also includes a status page application which can be used to verify the installation. For details see the *RPM Operations Guide*, under the Price Management Status Page section.

RPM Batch Scripts

The RPM application installer configures and installs the batch scripts under `ORACLE_HOME/j2ee/<instance>/rpm-batch`.

Note: Make sure that `JAVA_HOME` is set to the Java 5.0 (1.5.0) JDK located at `$ORACLE_HOME/jdk` from the application server before running the RPM batch programs

Web Help Files

The application installer automatically copies the web help files to the proper location. They are accessible from the help links within the application.

Re-Generating JMS Bindings with `BindEGateJMSQueue.jar`

The RPM application installer creates the `ORACLE_HOME/j2ee/<oc4jinstance>/sbynjndi` directory and runs the **BindEGateJMSQueue.jar** utility to bind its JMS queue. This file is located in the RPM application distribution under the `rpm12/sbynjndi` directory. Below are instructions on how to run this utility by itself at a later time to update the JMS host, port, and queue.

1. Set the `JAVA_HOME` environment variable so that it points to the Java 5.0 (1.5.0) JDK located at `$ORACLE_HOME/jdk` from the application server.
2. Change directories to `ORACLE_HOME/j2ee/<oc4j instance>/sbynjndi` and run `BindEGateJMSQueue.jar`:

Usage: `BindEGateJMSQueue -q <jms queue> -h <jms host> -p <jms port> -d <output directory>`

jms queue: Name of the JMS queue to use. This is not the full JNDI name of the queue. The JNDI name of the queue becomes `jms/Generic/Queue/<jms queue>`.

jms host: eGate JMS server

jms port: eGate JMS port

output directory: directory where the .bindings files will be created.


Example: `java -jar BindEGateJMSQueue.jar -q rpmTaskQueue -h jmshost -p 27053 -d $ORACLE_HOME/j2ee/rpm-oc4j-instance/sbynjndi`

The RPM application uses these .bindings files to locate and communicate with the e*Gate JMS server.

Appendix: RPM Application Installer Screens

You need the following details about your environment for the installer to successfully deploy the RPM application. Depending on the options you select, you may not see some screens or fields.

Screen: Data Source Details

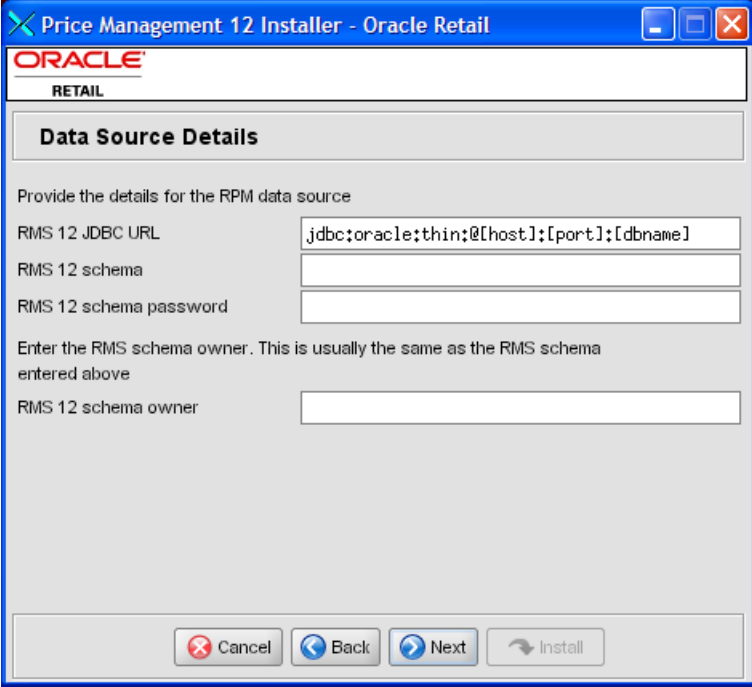

Price Management 12 Installer - Oracle Retail

ORACLE
RETAIL

Data Source Details

Provide the details for the RPM data source

RMS 12 JDBC URL

RMS 12 schema

RMS 12 schema password

Enter the RMS schema owner. This is usually the same as the RMS schema entered above

RMS 12 schema owner

Cancel Back Next Install

Fields on this screen:

Field Title	RMS 12 JDBC URL
Field Description	URL used by the RPM application to access the RMS database schema. See Appendix D: URL Reference for expected syntax. Note: The RPM database tables are a part of the RMS schema.
Destination	data-sources.xml
Example	jdbc:oracle:thin:@myhost:1525:mydatabase

Field Title	RMS 12 schema
Field Description	Database user where the RMS database schema was installed.
Destination	data-sources.xml
Example	RMS12

Field Title	RMS 12 schema password
Field Description	Password for the RMS schema user.
Destination	data-sources.xml

Field Title	RMS 12 schema owner
Field Description	Database user which owns the RMS tables. This is usually the same as the RMS 12 schema above.
Destination	rpm.properties
Example	RMS12

Screen: JMS Provider

Price Management 12 Installer - Oracle Retail

ORACLE

RETAIL

JMS Provider

RPM uses a JMS queue. This queue can be created in the built-in JMS for OC4J, or it can be created in an external SeeBeyond e*Gate JMS server

JMS Provider ☒ OracleAS JMS (built into OC4J)
☐ SeeBeyond e*Gate JMS

Enter the name for the queue used by this RPM application. This is not a fully qualified JNDI name. The JNDI name will be constructed using this queue name. The default value is given as an example.

Task Queue Name

Cancel Back Next Install

Fields on this screen:

Field Title	JMS Provider
Field Description	RPM is compatible with two different JMS vendors: SeeBeyond e*Gate and the OC4J JMS. If you are running a SeeBeyond e*Gate JMS server for the RIB, you can use that same JMS server for RPM's JMS functionality. Alternatively, you can also use OracleAS JMS, which is the JMS server provided within OC4J.
Example	OracleAS JMS

Field Title	Task Queue Name
Field Description	Name by which the task queue will be identified. If this is a new RPM environment, choose a queue name that is not already in use in the JMS server. If you have already created the queue in the JMS server as part of the Clustering Pre-Install steps, you must provide the same name in this field (without the jms/ prefix). Note: This is not a complete JNDI name. The value provided will be appended to jms/Generic/Queue/ (eGate) or jms/ (OC4J) to form the full JNDI name for the queue.
Destination	system.properties, oc4j-connectors.xml, orion-ejb-jar.xml (platform-mdb.jar), input to BindEGateJMSQueue.jar (eGate) , jms.xml (OC4J)
Example	rpmTaskQueue

Screen: eGate JMS Settings


The screenshot shows a window titled "Price Management 12 Installer - Oracle Retail". Inside the window, there is a header with the "ORACLE" logo and the word "RETAIL" below it. The main section is titled "eGate JMS Settings". Below this title, there is a text instruction: "Enter the JMS server details. The JMS server MUST be running during this RPM installation". There are two input fields: "JMS host" and "JMS port". At the bottom of the window, there are four buttons: "Cancel", "Back", "Next", and "Install".

Fields on this screen:

Field Title	JMS host
Field Description	hostname of the SeeBeyond e*Gate JMS server
Destination	input to BindEGateJMSQueue
Example	myhost


Field Title	JMS port
Field Description	JMS port of the SeeBeyond e*Gate JMS server
Destination	input to BindEGateJMSQueue
Example	24053

Screen: Manual Deployment Option

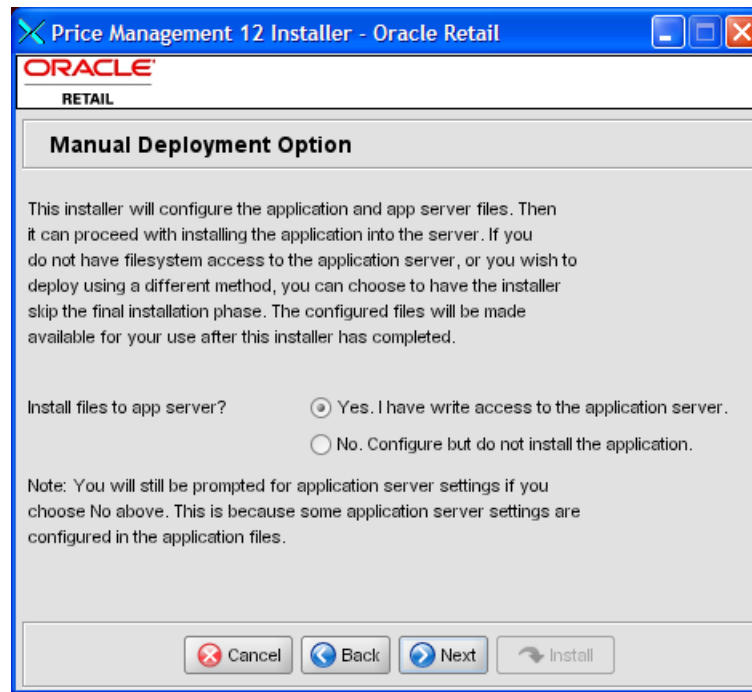

Fields on this screen:

Field Title	Install files to app server?
Field Description	If you do not have write access under ORACLE_HOME, you can still use the installer to gather your settings and configure the RPM files locally in the staging area. Then, at a later time, an administrator can manually copy over the RPM files and deploy the ear file. If you select this option, instructions are printed to the console and the installer log file for the steps needed to complete the installation.

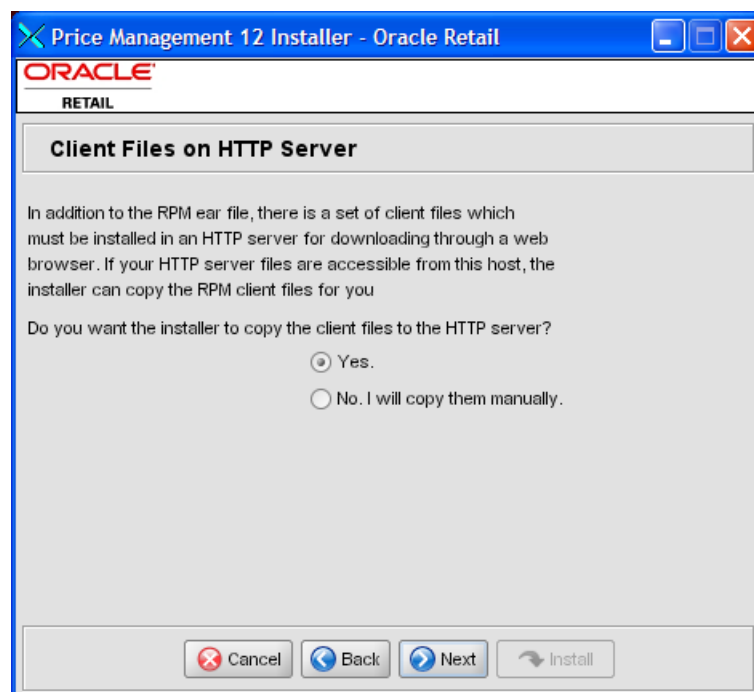Screen: Client files on the HTTP server**Fields on this screen:**

Field Title	Do you want the installer to copy the client files to the HTTP server?
Field Description	If the HTTP server that is serving the rpm.jnlp file is on the same host as the application server, then answer yes to this question so that the installer copies the client files to the HTTP server directories. The answer is usually yes since the RPM client files are usually installed to the Oracle Http Server that is a part of the same ORACLE_HOME as the OC4J instance running the RPM application. If the HTTP server is on a separate host, then you will have to manually copy the client files over. Copy the contents of INSTALL_DIR/rpm/application/rpm12/webstart under a new folder on the HTTP server.

Screen: Client Destination Directory

Price Management 12 Installer - Oracle Retail

ORACLE
RETAIL

Client Destination Directory

Enter the fully-qualified path to the destination directory for the client files. This will be the parent directory of the rpm.jnlp file.

Directory path for RPM client

Enter the HTTP URL that will be used to access the above destination directory.

HTTP base URL for RPM client

Fields on this screen:

Field Title	Directory path for RPM client
Field Description	This is the fully-qualified path to the location in the HTTP server where the RPM client files are to be installed. The directory provided will be the parent directory of rpm.jnlp. By default, this path will point to an 'rpm' subdirectory of the document root of the Oracle Http Server that is a part of the OracleAS installation (ORACLE_HOME/Apache/Apache/htdocs). This field is only shown if you selected "yes" to the previous question (Do you want the installer to copy the client files to the HTTP server?)
Example	/path/to/oracle/home/Apache/Apache/htdocs/rsm

Field Title	HTTP base URL for RPM client
Field Description	URL which you can use to locate the RPM client files using a web browser. This URL should lead to the same directory that was given for the Directory path for RPM client field above. If you chose not to have the installer copy the client files over, this URL should point to the location where you will manually copy them after the installer has completed. See Appendix D: URL Reference for expected syntax. This parameter can be changed later by modifying the *.jnlp files on the client side.
Destination	rpm.jnlp, rpmconfig.jnlp
Example	http://myhost:7777/rpm

Screen: OC4J Server Type: Managed or Standalone?**Fields on this screen:**

Field Title	Which type of OC4J server are you deploying to?
Field Description	A managed OC4J server is part of a larger Oracle App Server enterprise environment and is managed by OPMN. A standalone OC4J server is a single instance installed by itself and is not controlled by OPMN. This Oracle Retail application release is only supported on managed OC4J.
Example	managed

Screen: Application Server Details – OracleAS Enterprise

Price Management 12 Installer - Oracle Retail

ORACLE
RETAIL

Application Server Details - OracleAS Enterprise

Hostname

The OPMN request port is found in ORACLE_HOME/opmn/conf/opmn.xml

OPMN request port

Fields on this screen:

Field Title	Hostname
Field Description	Hostname of the application server
Example	myhost

Field Title	OPMN request port
Field Description	Port on which OPMN listens for requests to forward on to OC4J instances. This port can be found in the ORACLE_HOME/opmn/conf/opmn.xml file: <port local="6100" remote="6200" request="6003"/>
Example	6003

Screen: Application Server Details – OC4J Standalone

Price Management 12 Installer - Oracle Retail

ORACLE
RETAIL

Application Server Details - OC4J Standalone

Hostname

Enter the RMI port for the OC4J standalone server. The RMI port can be found in the ORACLE_HOME/j2ee/home/config/rmi.xml file.

OC4J RMI port

Cancel Back Next Install

Fields on this screen:

Field Title	Hostname
Field Description	Hostname of the application server
Example	myhost
Field Title	OC4J RMI port
Field Description	Port on which the standalone OC4J server listens for connections. This setting can be found in the ORACLE_HOME/j2ee/home/config/rmi.xml file. <pre><rmi-server xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:noNamespaceSchemaLocation="http://xmlns.oracle.com/oracleas/schema/rmi-server-10_0.xsd" port="23791"</pre>
Example	23791

Screen: Application Deployment Details

Price Management 12 Installer - Oracle Retail

ORACLE
RETAIL

Application Deployment Details

Provide the following details for the RPM application being installed.
The default values shown below are examples.

RPM 12 OC4J instance

The OC4J instance(s) for RPM must belong to an OC4J group created specifically for this RPM deployment. This installer will deploy the RPM application into all instances in the group. If you are not clustering the application across multiple OC4J instances then you should have an RPM group with just one member OC4J instance. Do NOT use default_group in this field.

RPM 12 OC4J group

RPM 12 app deployment name

Fields on this screen:

Field Title	RPM 12 OC4J instance
Field Description	Name of the OC4J instance that was created for this RPM application.
Example	rpm-oc4j-instance
Field Title	RPM 12 OC4J group
Field Description	Name of the OC4J group that was created for this RPM application. The OC4J instance given for the RPM OC4J Instance field should be a member of this group.
	The installer will deploy the RPM application to all OC4J instances which are members of this group. For this reason, you should not use default_group. A new group dedicated to RPM should be created instead.
Example	rpm_group

Field Title	RPM 12 app deployment name
Field Description	Name by which this RPM application will be identified in the application server
Example	rpm12

Screen: Other Oracle Retail Applications – OracleAS Enterprise

Price Management 12 Installer - Oracle Retail

ORACLE
RETAIL

Other Oracle Retail Applications - OracleAS Enterprise

The default values shown below are examples

Provide the following details for the other apps that will integrate with RPM.

RSM 12 OC4J instance	rsm-oc4j-instance
RSM 12 app deployment name	rsm12
RIBforRPM 12 OC4J instance	rib-rpm-oc4j-instance
RIBforRPM 12 deployment name	rib-rpm

Cancel Back Next Install

Fields on this screen:

Field Title	RSM 12 OC4J instance
Field Description	Name of the OC4J instance running the Security Manager (RSM) application. RSM is a requirement of RPM.
Example	rsm-oc4j-instance

Field Title	RSM 12 app deployment name
Field Description	Application deployment name of the Security Manager (RSM) application.
Example	rsm12

Field Title	RIBforRPM 12 OC4J instance
Field Description	Name of the OC4J instance running the RIBforRPM application. RIBforRPM provides the connection between RPM and the RIB (Retail Integration Bus), and is optional. See the <i>RPM 12.0 Operations Guide</i> for details on how to configure RPM without the RIB.
Example	rib-rpm-oc4j-instance

Field Title	RIBforRPM 12 deployment name
Field Description	Application deployment name of the RIBforRPM application. See the above note about RIBforRPM under RIBforRPM 12 OC4J Instance.
Example	rib-rpm

Screen: OC4J Administrative User

The screenshot shows a window titled "Price Management 12 Installer - Oracle Retail". Inside the window, there is a header with the "ORACLE" logo and the word "RETAIL" below it. The main title of the screen is "OC4J Administrative User". Below the title, there is a text box containing the text: "Enter the administrative user and password for the OC4J instance to which the RPM application will be deployed." There are two input fields: "OC4J admin user" with the value "oc4jadmin" entered, and "OC4J admin password" which is empty. At the bottom of the window, there are four buttons: "Cancel", "Back", "Next", and "Install".

Fields on this screen:

Field Title	OC4J admin user
Field Description	Username of the admin user for OC4J instance to which the RPM application is being deployed.
Example	oc4jadmin

Field Title	OC4J admin password
Field Description	Password for the OC4J admin user. You chose this password when you created the OC4J instance (managed OC4J) or when you started the instance for the first time (standalone OC4J).

Screen: Oracle Retail Application URLs

Price Management 12 Installer - Oracle Retail

ORACLE

RETAIL

Oracle Retail Application URLs

Provide or modify the URLs for other Oracle Retail applications below

RPM 12 JNDI provider URL: :orimi://mspdev34:6003:rpm-oc4j-instance/rpm12

RSM 12 JNDI provider URL: :orimi://mspdev34:6003:rsm-oc4j-instance/rsm12

RIBforRPM 12 JNDI provider URL: /mspdev34:6003:rib-rpm-oc4j-instance/rib-rpm

Buttons: Cancel, Back, Next, Install

Fields on this screen:

Field Title	RPM 12 JNDI provider URL
Field Description	URL which the RPM client uses to find the RPM application. See Appendix D: URL Reference for expected syntax.
Destination	rpm.jnlp, launchRpmBatch.sh
Example	opmn:orimi://myhost:6003:rpm-oc4j-instance/rpm12

Field Title	RSM 12 JNDI provider URL
Field Description	URL which the RPM application uses to find the RSM application. See Appendix D: URL Reference for expected syntax.
Destination	jndi_providers.xml
Example	opmn:orimi://myhost:6003:rsm-oc4j-instance/rsm12

Field Title	RIBforRPM 12 JNDI provider URL
Field Description	URL which the RPM application uses to find the RIBforRPM application. See Appendix D: URL Reference for expected syntax. RIBforRPM provides the connection between RPM and the RIB (Retail Integration Bus), and is optional. See the <i>RPM 12.0 Operations Guide</i> for details on how to configure RPM without the RIB.
Destination	jndi_providers.xml
Example	opmn:ormi://myhost:6003:rib-rpm-oc4j-instance/rib-rpm

Appendix: Installer Silent Mode

Repeating an Installation Attempt

In addition to the GUI and text interfaces of the RPM installer, there is a silent mode that can be run. This mode is useful if you wish to run a repeat installation attempt without going through the installer screens again.

The installer runs in two distinct phases. The first phase involves gathering settings from the user. At the end of the first phase, a properties file named `ant.install.properties` is created with the settings that were provided. Then the second phase begins, where this properties file is used to provide your settings for the installation.

To skip the first phase and re-use the `ant.install.properties` file from a previous run, follow these instructions:

1. Edit the `ant.install.properties` file and correct any invalid settings that may have caused the installer to fail in its previous run.
2. Run the installer again with the **silent** argument.

Example: `install.sh silent`

Appendix: Common Installation Errors

This section provides some common errors encountered during installation of RPM.

SeeBeyond JMS Unavailable

Error message:

```
[1013AS_1.mspdev27] 06/04/29 23:23:46 Notification ==>application : rpm12 is in failed state
```

```
[1013AS_1.mspdev27] 06/04/29 23:23:46 Notification ==>Operation failed with error:
```

```
Could not connect to host: mspdev33, port: 27053
```

```
[Summary] There are total 1 instances in the operation.
```

```
[Summary] Operation failed on 1013AS_1.mspdev27
```

```
[Summary] Operation on cluster FAILED since 1 instanced failed!
```

Solution:

Make sure the SeeBeyond e*Gate JMS server is running and that you provide the correct JMS host and port values when you install RPM. Pay special attention to the `input.taskqueue.jmshost` and `input.taskqueue.jmsport` properties in `ant.install.properties`. If you need to make a correction, you can run the installer again with this file as input by running silent mode (see Appendix B of this document).

Keystore Errors When Signing `rpm_client_config.jar`

Error message:

```
keytool error: java.io.IOException: Keystore was tampered with, or password was incorrect
```

This message may be encountered when you use the **keytool** utility to create an alias for signing the `rpm_client_config.jar` file. This usually happens when the alias for which you are generating a key already exists in the keystore file.

Solution:

Delete or rename the `~/.keystore` file and run the `keytool` command again. This creates a fresh keystore file.

Unreadable Buttons in the Installer

If you are unable to read the text within the installer buttons, it could mean that your `JAVA_HOME` is pointed to an older version of the JDK than is supported by the installer. Set `JAVA_HOME` to `$ORACLE_HOME/jdk` from the Oracle Application Server 10.1.3 installation and run the installer again.

“Unable to get a deployment manager” Message

Symptom:

The application installer quits with the following error message:

```
[oracle:deploy] Unable to get a deployment manager.  
[oracle:deploy]  
[oracle:deploy] This is typically the result of an invalid deployer URI format  
being supplied, the target server not being in a started state or incorrect  
authentication details being supplied.  
[oracle:deploy]  
[oracle:deploy] More information is available by enabling logging -- please see  
the Oracle Containers for J2EE Configuration and Administration Guide for details.
```

Solution:

This error can be caused by any of the following conditions:

- OC4J instance provided is not running.
- Incorrect OC4J instance name provided
- Incorrect OC4J administrative username and/or password
- Incorrect OPMN request port provided.

Make sure that the OC4J instance is running, and then check the **ant.install.properties** file for entry mistakes. Pay close attention to the `input.deployer.uri` (see Appendix D: URL Reference), `input.oc4j.instance`, `input.admin.user`, and `input.admin.password` properties. If you need to make a correction, you can run the installer again with this file as input by running silent mode (see Appendix B of this document).

Left-Side Menu Buttons Missing in RPM Client

Symptom:

You can log into the RPM application but the left-side menus do not show up on the screen.

Solution:

The RSM (Security Manager) schema has not been loaded with RPM security data. There is a set of RPM data scripts that is shipped with RMS 12.0 (See Chapter 2 of this document). Run these scripts in the RSM schema and try logging into RPM again.

“Could not create system preferences directory” Warning

Symptom:

The following text appears in the installer Errors tab:

```
May 22, 2006 11:16:39 AM java.util.prefs.FileSystemPreferences$3 run  
WARNING: Could not create system preferences directory. System preferences are  
unusable.  
May 22, 2006 11:17:09 AM java.util.prefs.FileSystemPreferences  
checkLockFile0ErrorCode  
WARNING: Could not lock System prefs. Unix error code -264946424.
```

Solution:

This is related to Java bug 4838770. The `/etc/.java/.systemPrefs` directory may not have been created on your system. See <http://bugs.sun.com> for details.

This is an issue with your installation of Java and does not affect the Oracle Retail product installation.

ConcurrentModificationException in Installer GUI

Symptom:

In GUI mode, the errors tab shows the following error:

```
java.util.ConcurrentModificationException
      at
java.util.AbstractList$Itr.checkForComodification(AbstractList.java:448)
      at java.util.AbstractList$Itr.next(AbstractList.java:419)
... etc
```

Solution:

You can ignore this error. It is related to third-party Java Swing code for rendering of the installer GUI and does not affect the retail product installation.

“Couldn't find X Input Context” Warnings

Symptom:

The following text appears in the console window during execution of the installer in GUI mode:

```
Couldn't find X Input Context
```

Solution:

This message is harmless and can be ignored.

Error while unpacking the rpm12.ear

Symptom:

The following text appears in the console window during execution of the installer:

```
07/12/19 10:53:17 Notification ==>Error while unpacking rpm12.ear
java.util.zip.ZipException: error in opening zip file
```

Solution:

This is a known bug (BugID 6330834) related to Solaris and NFS in Oracle Application Server 10.1.3.4. Follow the workaround documented for this bug: in the opmn.xml file in \$ORACLE_HOME/opmn/conf and add the following parameter to the java-options for the instance you are installing.

```
-Doc4j.autoUnpackLockCount=-1
```

After making this change you should reload OPMN, restart the affected OC4J instance(s), and retry the retail application installation.

Appendix: URL Reference

The application installers for the Price Management product will ask for several different URLs. These include the following.

JDBC URL for a Database

Used by the Java application and by the installer to connect to the database.

Syntax: jdbc:oracle:thin:@<host>:<port>:<sid>

- <host>: hostname of the database server
- <port>: database listener port
- <sid>: system identifier for the database

Example: jdbc:oracle:thin:@myhost:1521:mysid

HTTP URL for a WebStart Client

Used within a web browser to access the application client.

Syntax: http://<host>:<port>/<path>

- <host>: hostname of the OracleAS environment
- <port>: HTTP port for the Oracle Http Server (OHS). This can be found in the Listen parameter in the `<ORACLE_HOME>/Apache/Apache/conf/httpd.conf` file, or in the output of `opmnctl status -l`.
- <path>: Path to the JNLP file, relative to the document root of the HTTP server. The document root for the Oracle Http Server is located at `<ORACLE_HOME>/Apache/Apache/htdocs`.

Example:
`<ORACLE_HOME>/Apache/Apache/htdocs/rpm/rpm.jnlp`

`http://myhost:7777/rpm/rpm.jnlp`

JNDI Provider URL for an Application

Used by the application client to access the application running in the server. Also used by other applications for server-to-server calls.

Syntax: opmn:ormi://<host>:<port>:<instance>/<app>

- <host>: hostname of the OracleAS environment
- <port>: OPMN request port of the OracleAS environment. This can be found in the `<ORACLE_HOME>/opmn/conf/opmn.xml` file.
- <instance>: Name of the OC4J instance running the application
- <app>: Deployment name for the application.

Example: `opmn:ormi://myhost:6003:rpm-oc4j-instance/rpm12`

Note: The JNDI provider URL can have a different format depending on your cluster topology. Consult the Oracle Application Server documentation for further details.

Deployer URI

The deployer URI is used by the Oracle ANT tasks to deploy an application to an OC4J group. The application installer does not ask the user for this value; it is constructed based on other inputs and written to the `ant.install.properties` file for input to the installation script. For repeat installations using silent mode, you may need to correct mistakes in the deployer URI in `ant.install.properties`.

Note: There are several different formats for the deployer URI depending on your cluster topology. Consult the Deploying with the OC4J Ant Tasks chapter of the OC4J Deployment Guide for further details.

Syntax (managed OC4J): `deployer:cluster:opmn://<host>:<port>/<group>`

- `<host>`: hostname of the OracleAS environment
- `<port>`: OPMN request port of the OracleAS environment. This can be found in the `<ORACLE_HOME>/opmn/conf/opmn.xml` file.
- `<group>`: Name of the OC4J instance where the application will be deployed.

Example:

`deployer:cluster:opmn://myhost:6003/rpm_group`

Syntax (standalone OC4J): `deployer:oc4j:<host>:<port>`

- `<host>`: hostname of the OracleAS environment
- `<port>`: RMI port of the OC4J server. This can be found in the `ORACLE_HOME/j2ee/home/config/rmi.xml` file.

Example: `deployer:oc4j:myhost:23791`

Appendix: Configuration Files

For the RPM application to work properly in an application server environment there are many configuration files that must be customized. Some of these files are configuration files of the Oracle Application Server and others are specific to the RPM application. The RPM application installer takes care of configuring all of these files so for a default install you will not need to manually inspect and fix the files listed in this appendix. However, for reference and troubleshooting purposes, here is a listing of the configuration files and parameters modified by the RPM application installer.

Oracle Application Server Resource Configuration

The following files are part of Oracle Application Server and are modified by the RPM application installer.

jms.xml

`$ORACLE_HOME/j2ee/<rpm_instance>/config/jms.xml`

If you select OracleAS JMS as the JMS provider for RPM then the installer adds these lines to the OC4J `jms.xml` file (reformatted for readability):

```
<queue name="rpmTaskQueue"
      location="jms/rpmTaskQueue"
      persistence-file="rpmTaskQueue.persistence.file">
  <description>RPM Task Engine Queue</description>
</queue>
<queue-connection-factory location="jms/Queue/myQCF"/>
<xa-queue-connection-factory location="jms/Queue/myXAQCF"/>
```

This is the definition within the JMS server in OC4J for the non-XA RPM task queue and the XA and non-XA JMS queue connection factories.

oc4j-connectors.xml

`$ORACLE_HOME/j2ee/<rpm_instance>/config/oc4j-connectors.xml`

If you select OracleAS JMS as the JMS provider for RPM then the installer adds these lines to the OC4J `oc4j-connectors.xml` file (reformatted for readability):

```
<adminobject-config location="OracleASjms/rpmTaskQueue">
  <adminobject-
class>oracle.j2ee.ra.jms.generic.AdminObjectQueueImpl</adminobject-class>
  <config-property name="jndiName" value="jms/rpmTaskQueue"/>
  <config-property name="resourceProviderName" value="oc4jjms"/>
</adminobject-config>
```

This admin object is an XA wrapper for the RPM task queue defined in `jms.xml`.

RPM Application Deployment Descriptors

application.xml (J2EE standard)

Inside of rpm12.ear and deployed to
\$ORACLE_HOME/j2ee/<rpm_instance>/applications/<rpm_app>/META-INF/application.xml

If you select SeeBeyond as the JMS provider for RPM then the installer adds these lines to the application.xml deployment descriptor to add the rpm-egate-connector resource adapter module to the application:

```
<module>
  <connector>rpm-egate-connector.rar</connector>
</module>
```

orion-application.xml (OC4J proprietary)

Inside of rpm12.ear and deployed to
\$ORACLE_HOME/j2ee/<rpm_instance>/applications/<rpm_app>/META-INF/orion-application.xml

If you select SeeBeyond as the JMS provider for RPM then the installer adds these lines to the orion-application.xml deployment descriptor to add the rpm-egate-connector resource provider.

```
<resource-provider name="rpm-egate-resource-provider"
class="com.evermind.server.deployment.ContextScanningResourceProvider">
  <description>eGate Resource Provider</description>
  <property name="java.naming.provider.url"
value="file://@deploy.taskqueue.parent.dir@sbynjndi" />
  <property name="java.naming.factory.initial"
value="com.sun.jndi.fscontext.RefFSContextFactory" />
</resource-provider>
```

The @deploy.taskqueue.parent.dir@ string is replaced by the filesystem path to RPM's sbynjndi directory which holds the .bindings file for SeeBeyond JMS.

oc4j-connectors.xml (OC4J proprietary)

Inside of rpm12.ear and deployed to
\$ORACLE_HOME/j2ee/<rpm_instance>/applications/<rpm_app>/META-INF/oc4j-connectors.xml

If you select SeeBeyond as the JMS provider for RPM then the installer adds these lines to the oc4j-connectors.xml deployment descriptor to add the J2EE connector for the RPM eGate resource provider (reformatted for readability):

```
<connector name="rpm-egate-connector"
  path="rpm-egate-connector.rar">
  <config-property name="lookupMethod"
    value="resourceProvider" />
  <config-property name="resourceProviderName"
    value="rpm-egate-resource-provider" />
  <adminobject-config location="jms/Generic/Queue/@task.queue@">
    <adminobject-
class>oracle.j2ee.ra.jms.generic.AdminObjectQueueImpl</adminobject-class>
    <config-property name="jndiName"
      value="Queues/@task.queue@" />
    <config-property name="resourceProviderName"
      value="rpm-egate-resource-provider" />
  </adminobject-config>
```

</connector>

The **@task.queue@** string is replaced by the task queue name by the RPM application installer.

Note: There are 2 oc4j-connectors.xml files: this one at the RPM application level, and another one at the OC4J instance level which is documented above in the **Oracle Application Server Resource Configuration** section of this appendix.

data-sources.xml (OC4J proprietary)

Inside of rpm12.ear and deployed to
\$ORACLE_HOME/j2ee/<rpm_instance>/applications/<rpm_app>/META-INF/data-sources.xml

When the rpm12.ear file is deployed to OC4J it contains a configured data-sources.xml file modified by the installer. This file contains the database settings that are used by RPM. The installer configures the following lines in data-sources.xml (reformatted for readability):

```
<!-- Underlying connection pool for XA DataSource -->
<connection-pool name="RPMConnectionPool">
  <connection-factory
    factory-class="oracle.jdbc.pool.OracleDataSource"
    user="@data_source.user@"
    password="@data_source.password@"
    url="@data_source.url@">
  </connection-factory>
</connection-pool>

<!-- XA DataSource -->
<managed-data-source
  name="RPMXADataSource"
  connection-pool-name="RPMConnectionPool"
  jndi-name="jdbc/RPMXADataSource"/>

<!-- Non-XA DataSource -->
<native-data-source
  name="RPMNonXADataSource"
  jndi-name="jdbc/RPMNonXADataSource"
  description="RPM Non-XA DataSource"
  data-source-class="oracle.jdbc.pool.OracleDataSource"
  user="@data_source.user@"
  password="@data_source.password@"
  url="@data_source.url@">
</native-data-source>
```

The **@token.name@** strings are replaced with data source settings by the RPM application installer.

Note: There are two data-sources.xml files: this one at the RPM application level, and another one at the OC4J instance level. RPM does not use the file at the OC4J instance level (\$ORACLE_HOME/j2ee/<rpm_instance>/config/data-sources.xml)..

Note: After deployment, the RPM data source settings are also modifiable through the Enterprise Manager in the ASControl application. See the **Data Source Configuration in Container** section in the RPM operations guide document.

ra.xml (J2EE standard)

Inside of rpm-egate-connector.rar and deployed to
\$ORACLE_HOME/j2ee/<rpm_instance>/applications/<rpm_app>/rpm-egate-connector/META-INF/ra.xml

If you select SeeBeyond as the JMS provider for RPM then the installer configures the task queue name in the ra.xml resource adapter deployment descriptor.

```
<adminobject>
  <adminobject-interface>javax.jms.Queue</adminobject-interface>
  <adminobject-
class>oracle.j2ee.ra.jms.generic.AdminObjectQueueImpl</adminobject-class>
  <config-property>
    <config-property-name>jndiName</config-property-name>
    <config-property-type>java.lang.String</config-property-type>
    <config-property-value>Queues/@task.queue@</config-property-value>
  </config-property>
  <config-property>
    <config-property-name>resourceProviderName</config-property-name>
    <config-property-type>java.lang.String</config-property-type>
    <config-property-value>rpm-egate-resource-provider</config-property-value>
  </config-property>
</adminobject>
```

The @task.queue@ string is replaced by the queue name by the RPM application installer.

oc4j-ra.xml (OC4J proprietary)

Inside of rpm-egate-connector.rar and deployed to
\$ORACLE_HOME/j2ee/<rpm_instance>/applications/<rpm_app>/rpm-egate-connector/META-INF/oc4j-ra.xml

If you select SeeBeyond as the JMS provider for RPM then the installer updates the rpm-egate-connector.rar file with this file. However, there is nothing that is configured at install time for this file.

RPM Application Configuration Files – Server Side

rpm.properties

Inside of rpm12.ear and deployed to the following location:

`$ORACLE_HOME/j2ee/<rpm_instance>/applications/<rpm_app>/conf/rpm.properties`

This is the primary RPM application configuration file. It contains settings related to the database, security, and JMS.

`schema_owner=@schema.owner@`

`security_source=RSM`

`delete_staged_rib_payloads=@delete.staged.rib.payloads@`

`hibernate_xa_resource=/hibernate.xa.cfg.xml`

`hibernate_non_xa_resource=/hibernate.non-xa.cfg.xml`

`xa_queue_connection_factory=@jms.queue.connection.factory.xa@`

`non_xa_queue_connection_factory=@jms.queue.connection.factory.non-xa@`

`xa_queue_for_publish=@jms.queue.task.xa@`

`non_xa_queue_for_publish=@jms.queue.task.non-xa@`

`queue_for_subscribe=@jms.queue.task.non-xa@`

The `@token.name@` strings are replaced with settings based on user input by the RPM application installer.

`bundled_rsm_client=@bundled.rsm.client@`

To see the RSM application, set the value of the property `bundled_rsm_client` to true. The default is false.

jndi_providers.xml

Inside of rpm12.ear and deployed to

`$ORACLE_HOME/j2ee/<rpm_instance>/applications/<rpm_app>/conf/retek/jndi_providers.xml`

RPM uses the `jndi_providers.xml` file to locate the RSM and RIBforRPM applications that it integrates with. The JNDI provider URLs for these applications are placed in this file by the installer.

```
<provider app="rib-rpm" url="@rib.service.url@" factory="@rib.context.factory@">
  <jndi_name>com/retek/rib/binding/publisher/RIBMessagePublisher</jndi_name>
</provider>
```

```
<provider app="rsm" url="@rsm.service.url@" factory="@rsm.context.factory@">
```

The `@token.name@` strings are replaced with settings based on user input by the RPM application installer. The context factories will always be set to the OC4J setting of **oracle.j2ee.rmi.RMIInitialContextFactory**.

log4j.xml

Inside of rpm12.ear and deployed to

`$ORACLE_HOME/j2ee/<rpm_instance>/applications/<rpm_app>/conf/log4j.xml`

This `log4j` configuration file determines the log level of the RPM application. There are several places in this file where the installer sets the log level. The RPM application installer is hard-coded to always set a log level of ERROR. You can raise or lower this level by manually editing `log4j.xml` after deployment.

Note: RPM log messages are sent as console output from the OC4J server. This output is captured in the log files located under \$ORACLE_HOME/opmn/logs. See the **Logging** section of the **Backend System Administration and Configuration** chapter of the RPM operations guide for more details.

RPM Application Configuration Files – Batch Client Side

launchRpmBatch.sh

Installed to \$ORACLE_HOME/j2ee/<rpm_instance>/rpm-batch/scripts/launchRpmBatch.sh

launchRpmBatch.sh is the script that is invoked by every RPM batch program to set up the classpath of the batch client and connect to the RPM application running in OC4J. This file is a shell script but there is a configuration setting for the application URL that is modified by the installer.

```
PROVIDER_URL=-Djava.naming.provider.url=opmn:ormi://myhost:6003:rpm-oc4j-instance/rpm12
```

The PROVIDER_URL line above is modified by the RPM application installer to contain the JNDI provider URL for the RPM application. This is the setting that points the RPM batch client to the deployed RPM application in OC4J.

RPM Application Configuration Files – GUI Client Side

rpm.jnlp

Installed to \$ORACLE_HOME/Apache/Apache/htdocs/rpm/rpm.jnlp, or an alternate location provided by the user to the installer.

This is the main JNLP file for the RPM GUI client. The RPM application installer configures this file with the URL information for both server and client.

The installer configures the HTTP URL to the RPM client files in the codebase attribute of the root level <jnlp> element:

```
<jnlp codebase="http://myhost:7777/rpm" spec="1.0+" href="rpm.jnlp">
The JNDI provider URL to the RPM application in OC4J is also configured in
rpm.jnlp:
<property name="java.naming.provider.url" value="opmn:ormi://myhost:6003:rpm-oc4j-
instance/rpm12"/>
<property name="NAMING_URL" value="opmn:ormi://myhost:6003:rpm-oc4j-
instance/rpm12"/>
```

rpmconfig.jnlp

Installed to \$ORACLE_HOME/Apache/Apache/htdocs/rpm/rpmconfig.jnlp, or an alternate location provided by the user to the installer.

This is a secondary JNLP file that pulls the rpm_client_config.jar file into the RPM client classpath. This second JNLP file exists so that rpm_client_config.jar may be signed by any certificate and still be allowed by WebStart to run with the Oracle-signed jars listed in rpm.jnlp.

Just as in rpm.jnlp, the installer configures the HTTP URL to the RPM client files in the codebase attribute of the root level <jnlp> element:

```
<jnlp codebase="http://myhost:7777/rpm" spec="1.0+" href="rpmconfig.jnlp">
```