

# **Oracle® Mobile Field Service**

Implementation Guide

Release 12

**Part No. B25727-04**

September 2007

The Programs (which include both the software and documentation) contain proprietary information; they are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright, patent, and other intellectual and industrial property laws. Reverse engineering, disassembly, or decompilation of the Programs, except to the extent required to obtain interoperability with other independently created software or as specified by law, is prohibited.

The information contained in this document is subject to change without notice. If you find any problems in the documentation, please report them to us in writing. This document is not warranted to be error-free. Except as may be expressly permitted in your license agreement for these Programs, no part of these Programs may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose.

If the Programs are delivered to the United States Government or anyone licensing or using the Programs on behalf of the United States Government, the following notice is applicable:

#### U.S. GOVERNMENT RIGHTS

Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the Programs, including documentation and technical data, shall be subject to the licensing restrictions set forth in the applicable Oracle license agreement, and, to the extent applicable, the additional rights set forth in FAR 52.227-19, Commercial Computer Software--Restricted Rights (June 1987). Oracle Corporation, 500 Oracle Parkway, Redwood City, CA 94065.

The Programs are not intended for use in any nuclear, aviation, mass transit, medical, or other inherently dangerous applications. It shall be the licensee's responsibility to take all appropriate fail-safe, backup, redundancy and other measures to ensure the safe use of such applications if the Programs are used for such purposes, and we disclaim liability for any damages caused by such use of the Programs.

The Programs may provide links to Web sites and access to content, products, and services from third parties. Oracle is not responsible for the availability of, or any content provided on, third-party Web sites. You bear all risks associated with the use of such content. If you choose to purchase any products or services from a third party, the relationship is directly between you and the third party. Oracle is not responsible for: (a) the quality of third-party products or services; or (b) fulfilling any of the terms of the agreement with the third party, including delivery of products or services and warranty obligations related to purchased products or services. Oracle is not responsible for any loss or damage of any sort that you may incur from dealing with any third party.

Oracle, JD Edwards, PeopleSoft, and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

---

# Contents

**Send Us Your Comments**

**Preface**

## **1 Introduction**

Overviews.....	1-1
Technologies.....	1-11
Field Service Process Flow.....	1-15

## **2 Requirements and Dependencies**

Overview.....	2-1
Minimum Software Requirements.....	2-1
Minimum Hardware Requirements.....	2-2
Oracle Mobile Application Foundation Dependencies.....	2-3
Oracle Mobile Field Service Installation Dependencies.....	2-3

## **3 Implementing Oracle Mobile Application Foundation**

Overview.....	3-1
Installing and Configuring Oracle Database Lite 10g Release 2.....	3-1
Setting Profile Options for Mobile Application Foundation.....	3-8
Scheduling Concurrent Programs for Mobile Application Foundation.....	3-11

## **4 Implementing Oracle Mobile Field Service**

Overview.....	4-1
Installing the Mobile Application Patches .....	4-2
Confirming Required Enterprise Setups.....	4-2

Setting Profile Options for Oracle Mobile Field Service.....	4-5
Scheduling Concurrent Programs for Oracle Mobile Field Service.....	4-17
Creating and Managing Mobile Users.....	4-19
Testing the Mobile Field Service Application Implementation.....	4-19

## 5 Implementing the Wireless Option

Oracle Wireless Solution for Service Implementation Overview.....	5-2
Architectural Overview.....	5-3
Minimum Software Requirements.....	5-3
Minimum Hardware Requirements.....	5-4
Installation and Dependency Verification.....	5-4
Terminology.....	5-5
Oracle AS Wireless Edition Setup.....	5-5
Setting Proxies.....	5-6
Set Location Services.....	5-6
Wireless Application Implementation Overview.....	5-7
Implementation Tasks for the Wireless Option.....	5-8
Setting up the User with Wireless Responsibility.....	5-9
Setting up the Profile Options for the Mobile Field Service Wireless User.....	5-9
Setting up Default Organization and Subinventory.....	5-10
Setting Profile Options for Task Summary Display, Date Format.....	5-11
Setting up the System for Route Directions.....	5-15
Setting up the Email Server Profile Option.....	5-16
Setting up the Spares Management Order Parts Profile Option.....	5-16
Set up Master Service to Point to Field Service for AS (9.0.4).....	5-17
Task Scheduling and Assignment.....	5-18
Verifying the Implementation.....	5-21
Additional Information to Maintain the Wireless Option.....	5-22

## 6 Material Debrief Input Using Voice

Input Material Debrief Using Voice.....	6-1
Key Profile Options.....	6-1

## 7 Diagnostic Testing

Overview.....	7-1
Diagnostic Testing Oracle Mobile Application Foundation.....	7-1
Diagnostic Testing Oracle Mobile Field Service.....	7-3
Configuring Debug Logging.....	7-6
Common Issues.....	7-7

## **8 Administrative Tasks**

Overview.....	8-1
Setting the Conflict Resolution Rule.....	8-2
Configuring the Interapplication Bar.....	8-3
Manually Creating Mobile Users.....	8-3
Managing Concurrent Programs.....	8-4
Viewing User Synchronization Statistics.....	8-7
Working With Upload Errors.....	8-14
Managing Deferred Upload Errors.....	8-17
Managing Discarded Upload Errors.....	8-22
Managing Passed Upload Errors.....	8-24
Using the Oracle9i Lite Administration Screens.....	8-26

## **A Installing Oracle Mobile Field Service**

Installing Oracle Mobile Field Service/Laptop.....	A-1
Launching Oracle Mobile Field Service/Laptop.....	A-7
Installing Oracle Mobile Field Service/Pocket PC.....	A-9
Launching Oracle Mobile Field Service/Pocket PC.....	A-14
Creating a Shortcut for Oracle Mobile Field Service/Pocket PC.....	A-15
Subsequent Synchronizations for Oracle Mobile Field Service/Pocket PC.....	A-15

## **B Item Handling**

Limiting System Item Download.....	B-1
Setting Up System Items for Install Base Transactions.....	B-3
Setting Up Install Base Profile Options.....	B-4
Removing and Installing Parts in Oracle Mobile Field Service.....	B-4
Ordering and Transferring Parts.....	B-5

## **C Signature Control**

Overview.....	C-1
---------------	-----

## **D National Language Support**

Overview.....	D-1
---------------	-----

## **E Troubleshooting**

Troubleshooting the Application Publishing.....	E-1
Troubleshooting the Mobile User Concurrent Program.....	E-1
Reviewing Upload Errors.....	E-3

Manually Publishing Mobile Applications.....	E-3
Understanding the Java Utility Command Syntax.....	E-4
Usage Examples.....	E-5
Publishing Applications with Multiple Mobile Server Instances.....	E-5
Tracing Oracle9i Lite Mobile Server.....	E-6

## **F Mobile Synchronization Scalability and Performance**

Overview.....	F-1
Test Environment.....	F-2
Test Results.....	F-4
Performance Tuning of Mobile Application Foundation.....	F-10

## **G Customization Support**

Overview.....	G-1
Flexfield Support.....	G-2
Changing Labels.....	G-4
Generic Attachment Support.....	G-4
Writing New Custom Screens.....	G-5

## **Index**

---

# Send Us Your Comments

## **Oracle Mobile Field Service Implementation Guide, Release 12**

### **Part No. B25727-04**

Oracle welcomes customers' comments and suggestions on the quality and usefulness of this document. Your feedback is important, and helps us to best meet your needs as a user of our products. For example:

- Are the implementation steps correct and complete?
- Did you understand the context of the procedures?
- Did you find any errors in the information?
- Does the structure of the information help you with your tasks?
- Do you need different information or graphics? If so, where, and in what format?
- Are the examples correct? Do you need more examples?

If you find any errors or have any other suggestions for improvement, then please tell us your name, the name of the company who has licensed our products, the title and part number of the documentation and the chapter, section, and page number (if available).

Note: Before sending us your comments, you might like to check that you have the latest version of the document and if any concerns are already addressed. To do this, access the new Applications Release Online Documentation CD available on Oracle MetaLink and [www.oracle.com](http://www.oracle.com). It contains the most current Documentation Library plus all documents revised or released recently.

Send your comments to us using the electronic mail address: [appsdoc\\_us@oracle.com](mailto:appsdoc_us@oracle.com)

Please give your name, address, electronic mail address, and telephone number (optional).

If you need assistance with Oracle software, then please contact your support representative or Oracle Support Services.

If you require training or instruction in using Oracle software, then please contact your Oracle local office and inquire about our Oracle University offerings. A list of Oracle offices is available on our Web site at [www.oracle.com](http://www.oracle.com).





---

# Preface

## Intended Audience

Welcome to Release 12 of the *Oracle Mobile Field Service Implementation Guide*.

This guide is intended for implementation engineers, system administrators, and any other administrator-level users who are required to implement and/or administer Oracle Mobile Field Service.

### How To Use This Guide

This guide contains the information you need to understand and use Oracle Mobile Field Service.

- Chapter 1, "Introduction" provides overviews of Oracle Mobile Field Service and Oracle Mobile Application Foundation and the technology behind them.
- Chapter 2, "Requirements and Dependencies" describes the minimum software and hardware requirements of the Oracle Mobile Field Service applications, along with Oracle Mobile Application Foundation and Oracle Mobile Field Service dependencies.
- Chapter 3, "Implementing Oracle Mobile Application Foundation" describes the procedures you need to perform after you have successfully installed and configured Oracle9i Lite.
- Chapter 4, "Implementing Oracle Mobile Field Service" describes how to implement Oracle Mobile Field Service.
- Chapter 5, "Diagnostic Testing" describes how to run diagnostics for the Oracle Mobile Application Foundation and the Oracle Mobile Field Service applications.
- Chapter 6, "Administrative Tasks" describes how to perform the administrative tasks for the Oracle Mobile Application Foundation.

- Appendix A, "Installing Oracle Mobile Field Service" describes how to install Oracle Mobile Field Service/Laptop on a laptop computer and how install Oracle Mobile Field Service/Pocket PC on a Pocket PC. In both cases, this appendix also describes how to launch the application.
- Appendix B, "Item Handling" describes the profiles used to filter system items by category.
- Appendix C, "Signature Control" describes signature capture of a customer after performing the debrief on the Pocket PC.
- Appendix D, "National Language Support" describes how to use National Language Support (NLS) to change the default language of Oracle Mobile Field Service, English, to the desired language of the user.
- Appendix E, "Troubleshooting" describes how to troubleshoot problems you may have with Oracle Mobile Application Foundation or Oracle Mobile Field Service.
- Appendix F, "Mobile Synchronization Scalability and Performance" provides benchmark results that demonstrate the scalability of the MAF architecture to large numbers of mobile users on inexpensive server hardware running Linux.
- Appendix G, "Customization Support" describes the customization support for the Oracle Mobile Field Service applications. This appendix is intended for system integrators and implementation consultants who want to create custom code for these applications.

See Related Information Sources on page xi for more Oracle Applications product information.

## TTY Access to Oracle Support Services

Oracle provides dedicated Text Telephone (TTY) access to Oracle Support Services within the United States of America 24 hours a day, seven days a week. For TTY support, call 800.446.2398.

## Documentation Accessibility

Our goal is to make Oracle products, services, and supporting documentation accessible, with good usability, to the disabled community. To that end, our documentation includes features that make information available to users of assistive technology. This documentation is available in HTML format, and contains markup to facilitate access by the disabled community. Accessibility standards will continue to evolve over time, and Oracle is actively engaged with other market-leading technology vendors to address technical obstacles so that our documentation can be accessible to all of our customers. For more information, visit the Oracle Accessibility Program Web site

at <http://www.oracle.com/accessibility/>.

## **Accessibility of Code Examples in Documentation**

Screen readers may not always correctly read the code examples in this document. The conventions for writing code require that closing braces should appear on an otherwise empty line; however, some screen readers may not always read a line of text that consists solely of a bracket or brace.

## **Accessibility of Links to External Web Sites in Documentation**

This documentation may contain links to Web sites of other companies or organizations that Oracle does not own or control. Oracle neither evaluates nor makes any representations regarding the accessibility of these Web sites.

## **Structure**

- 1 Introduction**
- 2 Requirements and Dependencies**
- 3 Implementing Oracle Mobile Application Foundation**
- 4 Implementing Oracle Mobile Field Service**
- 5 Implementing the Wireless Option**

This chapter details the dependencies and steps necessary to perform a successful implementation of Oracle Wireless Option for Service. This process includes installing and configuring the Oracle AS Wireless Edition, the implementation of the necessary Oracle Applications that support the Wireless Option, and, finally, the implementation of the Wireless Option for Service.

- 6 Material Debrief Input Using Voice**
- 7 Diagnostic Testing**
- 8 Administrative Tasks**
  - A Installing Oracle Mobile Field Service**
  - B Item Handling**
  - C Signature Control**
  - D National Language Support**
  - E Troubleshooting**
  - F Mobile Synchronization Scalability and Performance**
  - G Customization Support**

## **Related Information Sources**

You can choose from many sources of information, including online documentation, training, and support services, to increase your knowledge and understanding of Oracle Mobile Field Service.

If this guide refers you to other Oracle Applications documentation, use only the Release 11*i* versions of those guides.

- **Online Documentation**

All Oracle Applications documentation is available online (HTML or PDF). Online help patches are available on *OracleMetaLink*.

- **Related Documentation**

Oracle Mobile Field Service shares business and setup information with other Oracle Applications products. Therefore, you may want to refer to other product documentation when you set up and use Oracle Mobile Field Service.

You can read the documents online by choosing Library from the expandable menu on your HTML help window, by reading from the Oracle Applications Document Library CD included in your media pack, or by using a Web browser with a URL that your system administrator provides.

If you require printed guides, you can purchase them from the Oracle Store at <http://oraclestore.oracle.com>.

- **Installation and System Administration**

*Oracle Applications CRM System Administrator's Guide*

This guide describes how to implement the CRM Technology Foundation (JTT) and use its Web-based interface, the System Administrator Console.

*Installing Oracle Applications*

This guide provides instructions for managing the installation of Oracle Applications products. In Release 11*i*, much of the installation process is handled using Oracle Rapid Install, which minimizes the time to install Oracle Applications, the Oracle8 technology stack, and the Oracle8*i* Server technology stack by automating many of the required steps. This guide contains instructions for using Oracle Rapid Install and lists the tasks you need to perform to finish your installation. You should use this guide in conjunction with individual product user's guides and implementation guides.

*Oracle9i Lite Installation and Configuration Guide*

This document provides information regarding the system requirements for Oracle9*i* Lite 5.0 as well as detailed instructions on how to install, upgrade to, and configure Oracle9*i* Lite 5.0.

*Oracle Applications System Administrator's Guide*

This guide provides planning and reference information for the Oracle Applications System Administrator. It contains information on how to define security, customize menus and online help, and manage concurrent processing.

- **Other Implementation Documentation**

*Oracle Field Service Implementation Guide*

This guide describes how to implement Oracle Field Service.

### *Oracle TeleService Implementation Guide*

This guide describes how to implement Oracle Teleservice and Oracle Knowledge Management.

### *Oracle Applications Flexfields Guide*

This guide provides flexfields planning, setup and reference information for the Oracle Mobile Field Service implementation team, as well as for users responsible for the ongoing maintenance of Oracle Applications product data. This manual also provides information on creating custom reports on flexfields data.

- **Training and Support**

#### **Training**

Oracle offers training to help you master Oracle Mobile Field Service. This training is presented through the Oracle Learning Network (OLN), Oracle University's online education utility.

#### **Support**

From on-site support to central support, our team of experienced professionals provides the help and information you need to keep Oracle Mobile Field Service working for you. This team includes your technical representative, account manager, and Oracle's large staff of consultants and support specialists with expertise in your business area, managing your hardware and software environment.

#### **OracleMetaLink**

OracleMetaLink is your self-service support connection with web, telephone menu, and e-mail alternatives. Oracle supplies these technologies for your convenience, available 24 hours a day, 7 days a week. With OracleMetaLink, you can obtain information and advice from technical libraries and forums, download patches, download the latest documentation, look at bug details, and create or update TARs. To use OracleMetaLink, register at (<http://metalink.oracle.com>).

**Alerts:** You should check OracleMetaLink alerts before you begin to install or upgrade any of your Oracle Applications. Navigate to the Alerts page as follows: Technical Libraries/ERP Applications/Applications Installation and Upgrade/Alerts.

**Self-Service Toolkit:** You may also find information by navigating to the Self-Service Toolkit page as follows: Technical Libraries/ERP Applications/Applications Installation and Upgrade.

## **Integration Repository**

The Oracle Integration Repository is a compilation of information about the service endpoints exposed by the Oracle E-Business Suite of applications. It provides a complete catalog of Oracle E-Business Suite's business service interfaces. The tool lets users easily discover and deploy the appropriate business service interface for

integration with any system, application, or business partner.

The Oracle Integration Repository is shipped as part of the E-Business Suite. As your instance is patched, the repository is automatically updated with content appropriate for the precise revisions of interfaces in your environment.

## **Do Not Use Database Tools to Modify Oracle Applications Data**

Oracle **STRONGLY RECOMMENDS** that you never use SQL\*Plus, Oracle Data Browser, database triggers, or any other tool to modify Oracle Applications data unless otherwise instructed.

Oracle provides powerful tools you can use to create, store, change, retrieve, and maintain information in an Oracle database. But if you use Oracle tools such as SQL\*Plus to modify Oracle Applications data, you risk destroying the integrity of your data and you lose the ability to audit changes to your data.

Because Oracle Applications tables are interrelated, any change you make using an Oracle Applications form can update many tables at once. But when you modify Oracle Applications data using anything other than Oracle Applications, you may change a row in one table without making corresponding changes in related tables. If your tables get out of synchronization with each other, you risk retrieving erroneous information and you risk unpredictable results throughout Oracle Applications.

When you use Oracle Applications to modify your data, Oracle Applications automatically checks that your changes are valid. Oracle Applications also keeps track of who changes information. If you enter information into database tables using database tools, you may store invalid information. You also lose the ability to track who has changed your information because SQL\*Plus and other database tools do not keep a record of changes.

---

# Introduction

This chapter covers the following topics:

- Overviews
- Technologies
- Field Service Process Flow

## Overviews

This section provides overviews for the following:

- Oracle Mobile Application Foundation
- Oracle Field Service
- Oracle Mobile Field Service

Oracle Mobile Application Foundation provides the infrastructure for Oracle Mobile Field Service.

## Overview of Oracle Mobile Application Foundation

The Oracle Mobile Application Foundation replaces the Oracle CRM Gateway for Mobile Devices, which supported the Oracle Mobile Field Service applications up to and including release 11.5.7. In release 11.5.8 and later, the Oracle Mobile Application Foundation provides the infrastructure for Oracle Mobile Field Service/Laptop and Oracle Mobile Field Service/Pocket PC.

In the new architecture, the Mobile Gateway Database in the middle tier has been replaced by the Oracle9i Lite mobile server. Data replication is restricted to the enterprise and client tiers.

The advantages of the new mobile architecture include the following:

- Simple to install and maintain.

- Integrates with the CRM applications suite.
- Supports multiple platforms.
- More scalable.
- Simplifies user management.
- Supports real-time job assignment. (As soon as a job is assigned, it is available for downloading.)

## Overview of Oracle Field Service

The Oracle Field Service suite supports an automated process used by service organizations to manage their field service operations. It assists in the entire service process from taking the customer call to fixing and reporting on the problem at a customer site. For a complete description of Oracle Field Service capabilities, see the *Oracle Field Service Implementation Guide* and "Field Service Process Flow", page 1-15.

The following table lists all the applications in the suite.

Suite Application	Description
Oracle Field Service	This application assists in assigning tasks to service representatives, creating and dispatching daily schedules, monitoring progress, and reporting on material, expense, and labor transactions.
Scheduler	This application enables optimization of scheduling capabilities of tasks to qualified resources. It takes into account driving time, distance, and part availability, and it creates part reservations.
Spares Management	This application is used to provide additional logistics and planning features to manage a service parts inventory in a multi-location environment.
<b>Oracle Mobile Field Service/Laptop</b>	This application is a disconnected application typically installed on a field service representative's laptop to receive his daily schedule and report on progress, material, expense, and labor.



Suite Application	Description
Oracle Mobile Field Service/Pocket PC	This application is a disconnected application for a Pocket PC so a field service representative can receive his daily schedule and report on progress, material, expense, and labor.

The Oracle Mobile Field Service applications integrate with the following application modules:


- Oracle Install Base  
Tracks the products installed at customer site.
- Oracle Application Foundation components  
Oracle Application Foundation components such as Task Manager and Resource Manager manage various operations of Oracle Field Service.

## Overview of Oracle Mobile Field Service

Oracle Mobile Field Service converts a portable computer device into a workbench for field service representatives. Oracle Mobile Field Service is the ideal solution for many service markets, such as HVAC, utilities, copier machine maintenance, telecommunications, and office supply industries. This application enables FSRs to print service reports, view or update install base records, and much more. For a complete description on how field service representatives may use Oracle Mobile Field Service in their work day, see "Field Service Process Flow", page 1-15.

For all Oracle Mobile Field Service applications, the first screen or page describes the schedule for the day for the field service representative. This page or screen can also describe past and future responsibilities. The following graphics depict a typical Engineers Task List screen of Oracle Mobile Field Service/Pocket PC.

### All Open Tasks

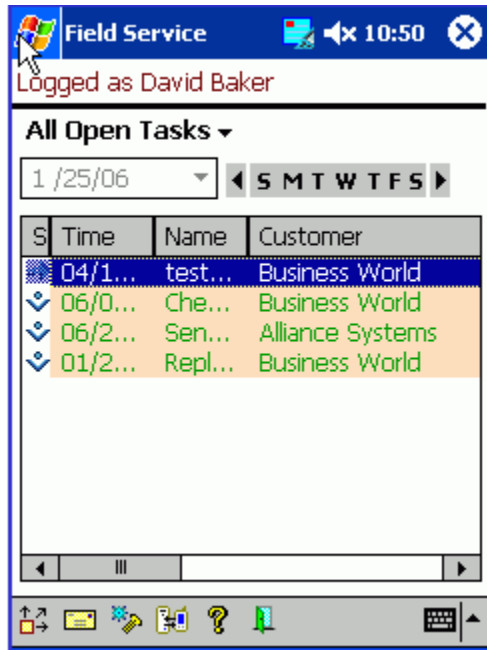

The following graphic depicts a typical Oracle Mobile Field Service/Laptop Calendar page.

### Calendar: Daily View

**ORACLE Field Service Laptop** Synchronize Home Logout Preferences Help

Search Task By: Task Number   [Advanced Search](#) Logged In As: Bramer, Fred

**Field Service Technician Dashboard.**

View: Open Tasks

Details	Service Request	Customer	Subject	Task	Update	Planned Effort	Scheduled Start Date	Assignment Status	Parts Debrief
<a href="#">Show 38326</a>		Business World	test	32408		2 Minute	2007-01-30 02:10:01.0	Accepted	
<a href="#">Show 30204</a>		Business World	Assign technician with knowledge in French and with part FS89108	24221		2 Hour	2005-06-23 11:30:00.0	Working	
<a href="#">Show 36848</a>		Business World	Diagnose network card	31690		1 Hour	2006-01-25 10:00:00.0	Accepted	
<a href="#">Show 37252</a>		Business World	Test	32132		5 Minute	2007-01-26 09:34:00.0	Assigned	
<a href="#">Show 37254</a>		Business World	Test	32133		5 Minute	2007-01-26 09:49:00.0	Assigned	

**Quick Links**

- [Create Parts Order](#)
- [Parts Transfer](#)
- [Calendar](#)
- [Create Personal Tasks](#)

**Messaging**

- [View Messages](#)
- [Create Message](#)

**Create Service Request**

Search Key: Account Number

\* Value

Synchronize Home Logout Preferences Help

About This Page Privacy Statement Version: 12.0.0 - 20080830 Copyright (c) 2006, Oracle. All rights reserved.

### Oracle Mobile Field Service Applications Compared

The following table compares the Oracle Mobile Field Service applications by feature.

Feature	Laptop	Pocket PC
View task summary	X	X
Search task/service request	X	X
Create task	X	X
Auto assign tasks	X	X
Task detail/change task status	X	X
Update task (ETA, equip ID)	X	X
Create service request	X	X

<b>Feature</b>	<b>Laptop</b>	<b>Pocket PC</b>
Service request details	X	X
Service request resolution	X	X
View contractual details	X	X
View contract notes	X	X
Create/view notes	X	X
Customer information	X	X
Counter reading	X	X
Labor debrief	X	X
Expense debrief	X	X
Material debrief	X	X
Search parts	X	X
Transfer parts	X	
Create part order	X	X
View part order status	X	X
Service history	X	X
Signature capture		X
Credit card validation	X	X
Flexfield support	X	X
Customization support	X	X
Printing	X	

Feature	Laptop	Pocket PC
Messaging and notifications	X	X
View install base at location	X	X
View install base configuration	X	X
Parts requirement tied to a task	X	X

### Oracle Mobile Field Service Key Features Described

The following are key features of Oracle Mobile Field Service:

- Service Requests and Tasks, page 1-7
- Debrief Reporting, page 1-9
- Spares Management, page 1-10
- Mobile Customization Support, page 1-10

#### *Service Requests and Tasks:*

The following are functions that you can perform with Oracle Mobile Field Service:

- View and update a service request and task  
Upon initial download, a task has a status of "Assigned". However, as the task progresses, the field service representative can change this status and task type.
- Work on a task  
For a complete description on how field service representatives may complete a task, see "Field Service Process Flow", page 1-15.
- Create a service request and task  
The dispatch center issues the service request and task to the field service representative. On some occasions, a problem may be detected at the customer site that was not recognized by the dispatch center. In this case, the field service representative can create a service request and task.  
Tasks that you create on the mobile computer device are automatically assigned to you, provided that the task type is associated with the "dispatch rule" and the task has a status of "Assigned." You can immediately work on the new task assignment, including entering debriefs.

If the install base item for a service request is not correct, you are able to change this install base item. Furthermore, you can create a service request for an install base item at the customer location.

- View service history

Oracle Mobile Field Service applications display service histories for closed or completed service requests, detailing any installed base item and customer information.

Only closed service requests are downloaded with a service history. Service history information is read-only. If the service request is based on the install base product, then the service history for the install base product is available to view. Otherwise, for that customer or customer location, a history will be displayed.

The following information is replicated for a service history record:

- Closed or completed service request
- Primary contact of this closed service request
- Product or item of the service request, excluding parent and child records
- Closed tasks of this service request
- Closed task assignments of these tasks (role = assignee)
- Resources of these task assignments
- Debrief lines belonging these task assignments

See Appendix B, "Item Handling", page B-xi for additional details about information replication.

- View customer and product information

Oracle Mobile Field Service provides you with ample information on the customer, such as address and notes. The application likewise offers a detailed description of the customer product.

- Record counter readings

For customer product, Oracle Mobile Field Service enables you set and reset counter readings for this product if this is desirable. Counter readings are helpful in scheduling maintenance.

- Time zone support

Oracle Mobile Field Service allows operations across multiple time zones. All the times displayed on the client are local times. All times are stored in the database in server time. Appropriate conversions are made whenever required for storage or

display. The SERVER\_TIMEZONE\_ID and CLIENT\_TIMEZONE\_ID profiles enable the server and client time zones to be set. If the appropriate profile options for either of these profiles are not defined, then no time zone conversion will occur and all times will be shown in the server time.

#### *Debrief Reporting:*

In Oracle Mobile Field Service, a field service representative can report the labor time, materials, and expenses incurred during the completion of a task. For any labor, material, or expense report item that you create and have not synchronized, Oracle Mobile Field Service allows you to delete this report item.

- Material report item

For a material report, field service representatives specify the activity code and then the desired report item. Next, they specify how many of the desired items they require. To add the desired report item to the material report, the field service representative saves this item description.

**Note:** For serial-controlled items, the field service representative can assign the serial number at debrief time for items not having a serial number.

The following system items are replicated to mobile computer devices:

- Items used in a service request assigned to or created by the mobile user
- Item instance items used in a service request assigned to or created by the mobile user
- Items used in debrief lines
- Items used in item orders
- Items present in a good subinventory assigned to the mobile user
- Items present in the inventory organization specified by the Service: Inventory Validation Organization profile.
- Credit card

Allows capture of credit card information for payment. Giving the customer the ability to pay by credit card is a convenience for both the customer and the service organization.

- Signature capture

Oracle Mobile Field Service enables you to obtain a customer's electronic signature for task sign off. The customer's electronic signature indicates that the task is

complete and that the customer has accepted your work.

#### *Spares Management:*

Oracle Mobile Field Service enables you to manage the parts inventory that you can use in the repair or replacement of parts for a service request. This is done through the following functions:

- Order parts

Field service representatives can order parts if a job requires them. A part requirement can be tied to a task, and multiple parts can be ordered for each requirement.

- View order status

Once a part is ordered, a field service representative can access the status of the ordered part.

- Transfer parts

If a part is needed but not available from an easily accessible inventory, the desired part can be transferred to a more convenient inventory. This process may prove to be more efficient than ordering the part.

- Category set limiting

A field service organization can have a large number of system items related to an inventory organization. However, field service representatives only use a portion of these items. To improve synchronization performance and to reduce the size of the downloaded data set, you can filter the system by category before downloading the data set to the field service representative.

#### *Mobile Customization Support:*

Mobile customization enables you to tailor Oracle Mobile Field Service functionality to fit your business needs and practices. Customization is done through flexfields and the Software Development Kit (SDK). See the *Customization Support for Oracle Mobile Field Service* document or OracleMetaLink Note: 248063.1 to learn more about the SDK. See Appendix G, "Customization Support", page G-1 for additional information about customization support.

- Flexfields

Descriptive flexfields provide customization capabilities in an Oracle Mobile Field Service application. This satisfies various user needs without having to reprogram the application.

Users can also use context-sensitive flexfields when the information stored by the application depends on other values users enter in other parts of the form.

The following table describes the types of flexfields you can find in Oracle Mobile



Field Service:

<b>Flexfield</b>	<b>Laptop</b>	<b>Pocket PC</b>
Service request	read/write	read/write
Task	read/write	read/write
Debrief header	read/write	read/write
Debrief line	read/write	read/write
Parts requirement	NA	read/write
Item	read	read
Product	read	read
Customer	read	read

See "Flexfield Support", page G-2 to learn how to set up descriptive flexfields in an Oracle Mobile Field Service application.

- SDK

Through the use of the SDK, you can build custom screens for Oracle Mobile Field Service.

## Technologies

Oracle Mobile Field Service/Laptop and Oracle Mobile Field Service/Pocket PC are built upon the Oracle Mobile Application Foundation and Oracle Mobile Field Service technologies.


### Oracle Mobile Application Foundation Technology

The following components form the Oracle Mobile Application Foundation:

- The mobile server repository in the Applications database.
- The Oracle9i Lite mobile server.
- For a laptop computer, a local Oracle9i Lite database and a local Web-to-Go server.

- For a Pocket PC, a local Oracle9i Lite database and mSync clients.

The following illustration summarizes the relationships between these components. In the illustration, the Oracle Applications 11i database (including application logic, business events, mobile administration schema, base tables, and conflict resolution) resides on the enterprise tier. The enterprise tier is connected to the mobile server on the middle tier. Synchronizations are used to connect the mobile server on the middle tier to the components on the client tier. On the client tier, laptop clients have a local Oracle9i Lite database and a local Web-to-Go server, while Pocket PC clients have a local Oracle9i Lite database and mSync clients on each Pocket PC.

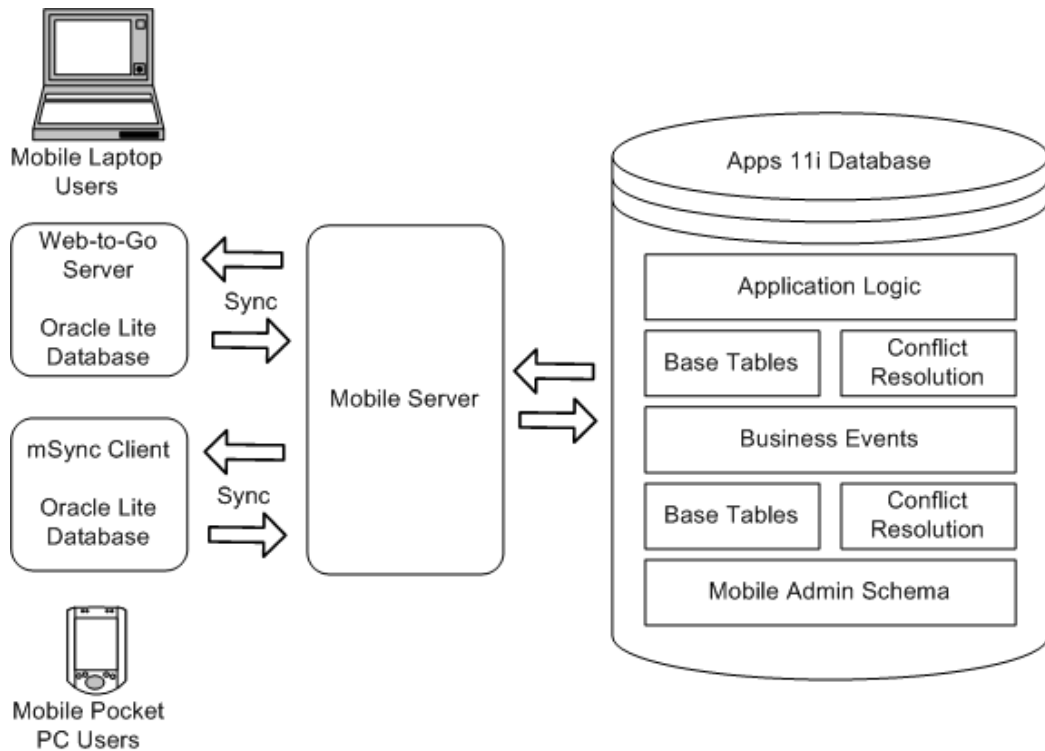

## Oracle Mobile Application Foundation Deployment

In the sample deployment illustrated below, there are three middle-tier application Web servers. Server1-host is dedicated to offline (mobile) users, while Server2-host and Server3-host are dedicated to online users.

The process flow begins on the client tier, where each user (whether mobile or online) opens an HTTP connection to the middle-tier servers through a load balancer/proxy. However, the offline user connects using the following URL:


```
http://<ip-address>:<port number>/webtogo
```

URLs which specify "webtogo" are processed by the mobile server operating in standalone mode on Server1-host. URLs from the online PC applications (which do not

contain webtogo) are processed by an Apache/Jserv module on either Server2-host or Server3-host.

Finally, the three Web servers on the middle tier connect to an Applications 11i database on the enterprise tier.

See Appendix F, "Mobile Synchronization Scalability and Performance", page F-1 for additional information.

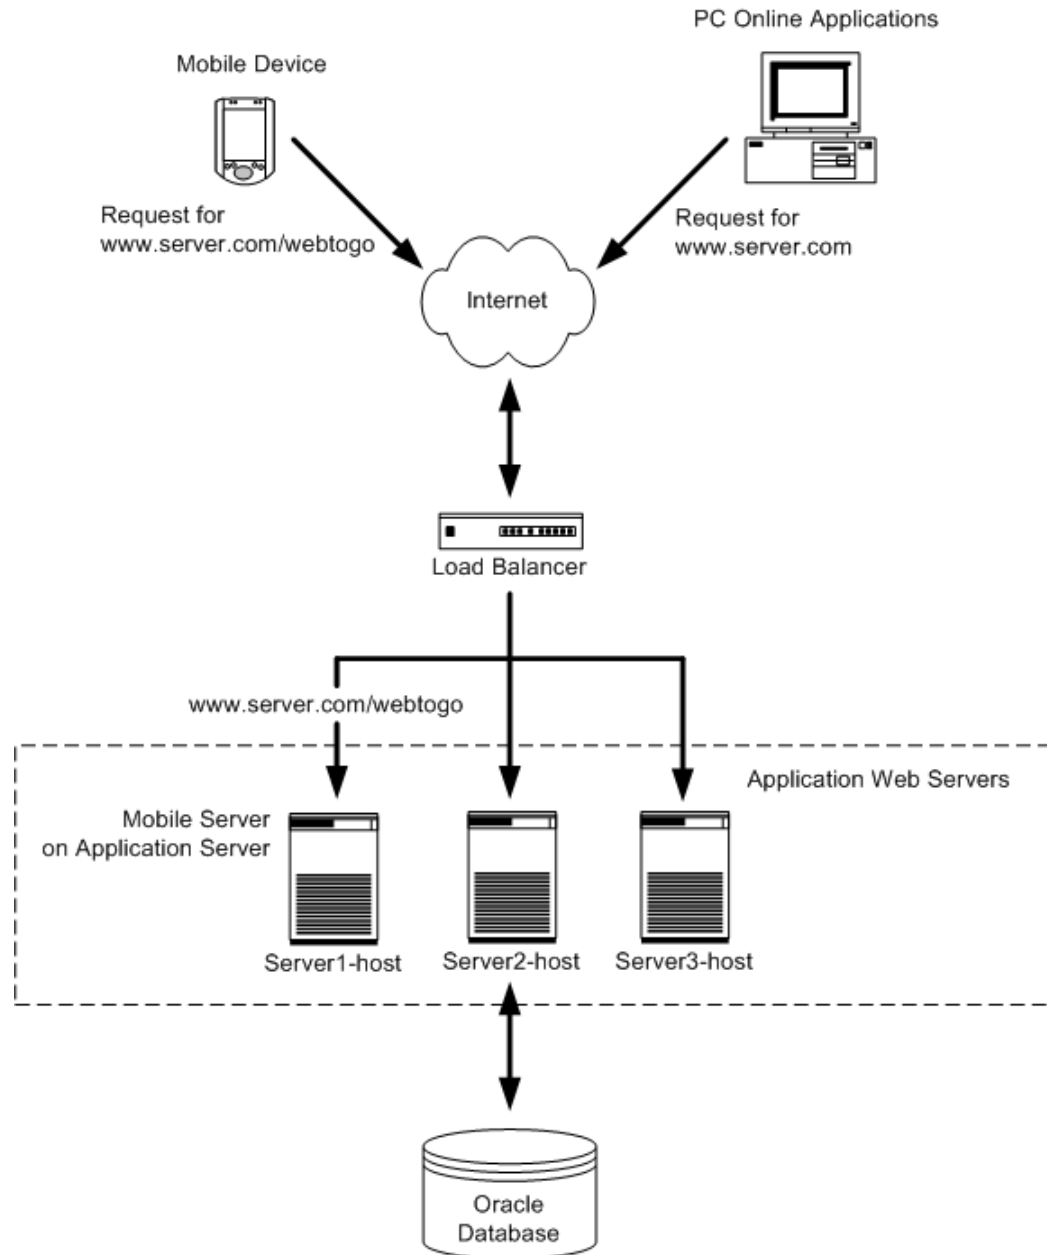

**Note:** The Oracle9i Lite mobile server is configured to run in standalone mode, independent of the Oracle9i Application Server or Apache installation. In this mode, Oracle9i Lite uses its own HTTP listener.

## Oracle Mobile Field Service Technology

Oracle Mobile Field Service comes in two types—laptop and Pocket PC. Oracle Mobile Field Service/Laptop and Oracle Mobile Field Service/Pocket PC are complete

job-management applications that help field service representatives (FSRs) complete their daily responsibilities. These applications are part of the Oracle Field Service set of applications. Oracle Field Service in turn is part of the Oracle E-Business Suite, an integrated set of applications designed to work together.

Oracle Mobile Field Service applications synchronize with the enterprise system in order to receive new data, such as tasks and service requests. Synchronization is also important to send changes made in the application, such as newly created report items and updated task statuses.

The enterprise system is based on the Oracle11i database. Information is exchanged between the mobile computer device and the enterprise system via the mobile server. The laptop computer uses the Web-to-Go server and the Oracle9i Lite database to send and receive information from the mobile server. The Pocket PC uses the mSync Client and the Oracle9i Lite database to send and receive information from the mobile server. Oracle Mobile Field Service technology is graphically represented in the figure found in "Oracle Mobile Application Foundation Technology", page 1-11.

## **Field Service Process Flow**

This section describes the typical field office work flow (Oracle Field Service) and the typical field service representative work flow (Oracle Mobile Field Service).

### **The Oracle Field Service Process**

The field service process has six basic steps. This process starts with the creation of a service request. The service request has at least one task, which is completed by a field service representative in the field. After completing a task, the field service representative electronically submits the task details to the home office, which is now able to create an invoice. The field service process is driven by the service request status and task status changes, electronically exchanged between the field service representative and home office. The basic steps of the field service process are described in the following table:

Steps	Description
1. Service request intake and validation	<p>There are several ways to report a request for service. The customer can create the request by using the Web, Computer Telephone Integration (CTI), e-mail, or by dialing into a call center where an agent takes the call. A service request can also be created by a field service representative through a project or by a sales order (installation of a product). When the request is received, the customer, product and contract are checked in the validation step.</p>
2. Service request screening and qualification	<p>After a service request is created, it is screened to avoid a field visit. The service request is analyzed by a support agent who searches the knowledge base for a solution. As an outcome of this process, the request may be closed, a part may be shipped to the customer, or the customer might ship the part for in-house repair. When a field visit is required, a task is created based on the problem description and action needed to resolve the problem. A definition for the parts necessary to resolve the task is also given. The creation of a task for installation or maintenance of customer product can be created automatically from a service contract or sales order.</p>
3. Service request planning and dispatch	<p>The tasks must be scheduled, assigned, and dispatched to the field service representative. The scheduling of the tasks is done based on various constraints such as skills, location, availability, and required parts. When the tasks assignment is done, the task or schedule is dispatched to the service representative. The service representative receives notification and progress on the task is monitored.</p>

Steps	Description
4. Service request delivery and reporting	Once field service representatives receive an assigned task or schedule, they can begin service at the customer site. They report on progress, materials used and recovered, expenses, and labor time. Additionally, they can record counter readings and describe how the problem was resolved. It might be necessary to create new tasks or service requests if the field service representative cannot help the customer immediately. They can recover the product or product part for repair. All the reported information is used for billing the customer. Reporting on materials-used also results in automatic replenishment of the inventory in the service vehicle.
5. Service request monitoring	Unforeseeable events can occur that impact the progress of a task. In this case, escalations can be raised to indicate this situation.
6. Service request completion and billing	When field service representatives complete a task, they sets the task status as COMPLETE and then move on to the next task. The task information is checked by an agent at the home office for any service contract coverage and then an invoice is created. The inventories, sub-inventories, and install base are all updated.

**Note:** Depending on your service organization, the above steps can be separated or combined.

The component in the step, Service request delivery and reporting, page 1-17, can be applied using Oracle Mobile Field Service. In this application, the schedule is received by the field service representative on his mobile computer device. He then records counter readings and reports on material used, labor time, and expenses incurred.

## Various Orders of Task Completion

Field service representatives can complete their scheduled tasks under different scenarios.

### Scenario 1: Complete Scheduled Tasks in Pre-determined Order

In this scenario, the field service representative works on one job at a time and conforms to the dispatched schedule. For instance, the following tasks may be assigned to a field service representative:

- task 1: 8:00 Installation at Customer A
- task 2: 9:00 Repair on-site at Customer B
- task 3: 10:00 Installation at Customer C

The field service representative first needs to finish task 1 before going on to task 2. He needs to follow the pre-defined order of the dispatcher. The field service representative cannot reschedule tasks, but he can reject a task.

This setup gives the dispatcher control over the daily schedule of the field service representative. The dispatcher sets up the tasks, including what time and where the field service representative is to be at all times.

### **Scenario 2: Complete One Scheduled Task at a Time in Any Order**

In this scenario, the field service representative works on a single job at a time and need not conform to the dispatched schedule.

### **Scenario 3: Complete Multiple Scheduled Tasks in Any Order**

In this scenario, the field service representative works on multiple jobs at a time and does not conform to the dispatched schedule.

Scenario 2 and Scenario 3 gives field service representatives control over their day. The dispatcher sends the tasks and locations to the field service representative, and the service representative then decides when to perform each task. This scenario works well in an environment where each task requires only one field service representative. For example, if a field service representative has a dental appointment, he can arrange the time he wants to be at the customer site near his dentist. The field service representative is expected to complete all the tasks on the day they were assigned. If he is unable to complete a scheduled task, he can reject it and then the dispatcher will re-schedule the task for the next day.

## **Avoiding Multiple Task Assignments**

If you send more than one field service representative to perform a task, ensure that you schedule only one task assignment at a time, because multiple task assignments can lead to conflicts. For example, suppose you have a task that requires three field service representatives. You set up the task and then you send it to all three representatives. It now appears on their schedules. However, if one of your field service representatives changes the time for his task, that would affect the schedules of the other two representatives. To avoid this, you must create three tasks, one for each representative.



---

# Requirements and Dependencies

This chapter covers the following topics:

- Overview
- Minimum Software Requirements
- Minimum Hardware Requirements
- Oracle Mobile Application Foundation Dependencies
- Oracle Mobile Field Service Installation Dependencies

## Overview

This chapter describes the minimum software and hardware requirements of the Oracle Mobile Field Service applications along with Oracle Mobile Application Foundation and Oracle Mobile Field Service dependencies.

## Minimum Software Requirements

This section describes the minimum software requirements necessary to run Oracle Mobile Field Service on various platforms.

### Enterprise Server

Refer to Installing Oracle Applications for the overall software requirements of the Oracle E-Business Suite.

### Laptop Client

- Operating system: Windows NT 4.0 (Service Pack 5), Windows 2000, Windows XP, or Windows ME
- Browser: Microsoft Internet Explorer, version 6.0 or later. This is the recommended

browser for all HTML-based applications.

## **Pocket PC Client**

This section describes the minimum software requirements for the Pocket PC and the PC used during the install.

### **Desktop PC (Pocket PC Desktop)**

- Operating system: Windows NT 4.0 (Service Pack 5), Windows 2000, Windows XP, or Windows ME
- ActiveSync 3.6 and above

### **Pocket PC**

- Operating system: Pocket PC 2002, Pocket PC 2003

## **Minimum Hardware Requirements**

### **Enterprise Server**

Refer to Installing Oracle Applications for overall hardware requirements for the E-Business Suite.

Refer to Appendix G, "Customization Support", page G-1 for a description of the mobile server.

### **Laptop Client**

- Computer: IBM-compatible with Pentium III processor
- Disk space: 1 GB
- Monitor: 256 color display
- RAM: 128 MB
- Other requirements: serial port, Internet connection, mouse or pointer device

## **Pocket PC Client**

This section describes the minimum hardware requirements for the Pocket PC and the PC used during the install.

### **Desktop PC**

- Computer: IBM-compatible with Pentium I processor
- Disk space: 50 MB free space
- Monitor: 256 color display
- RAM: 32 MB
- Other requirements: serial port, Internet connection, mouse or pointer device

#### **Pocket PC**

- Pocket PC 2002, Pocket PC 2003 OS-supporting devices
- Processor supported:
  - ARM
  - XScale
- 16 MB RAM

## **Oracle Mobile Application Foundation Dependencies**

Before setting up the Oracle Mobile Application Foundation, there are several other Oracle applications or components which you must first install and implement. For details about these dependencies, please refer to *OracleMetaLink* Note 241425.1.

## **Oracle Mobile Field Service Installation Dependencies**

Before setting up Oracle Mobile Field Service, there are several other Oracle applications or components which you must first install and implement. Refer to the Mobile Applications: Patch Information document (Note 241425.1 on *OracleMetaLink*) for details on the correct patches, dependencies, and the like.



---

# Implementing Oracle Mobile Application Foundation

This chapter covers the following topics:

- Overview
- Installing and Configuring Oracle Database Lite 10g Release 2
- Setting Profile Options for Mobile Application Foundation
- Scheduling Concurrent Programs for Mobile Application Foundation

## Overview

This chapter describes the following procedures, which are required to successfully implement the Oracle Mobile Application Foundation:

- Installing and Configuring Oracle Database Lite 10g Release 2
- Setting Profile Options for Mobile Application Foundation
- Scheduling Concurrent Programs for Mobile Application Foundation

## Installing and Configuring Oracle Database Lite 10g Release 2

### Using Oracle Applications R12

You must install and configure Oracle10g Lite Release 2 (10.2.0.1) followed by additional patch sets mentioned below before implementing Oracle Mobile Application Foundation. Oracle10g Lite is not included in the R12 Oracle Applications Rapid Install, so you must install Oracle10g Lite before proceeding to the Oracle Mobile Application Foundation implementation steps. For installation details, please see the appropriate platform-specific version of the *Oracle10g Lite Installation and Configuration Guide Release*

#### 10.2.0.2.

If you are upgrading from a previous version of Oracle Applications, then you must apply the correct patch(es) for the Oracle Mobile Application Foundation before installing and configuring Oracle10g Lite.

The correct sequence is as follows:

1. Install Oracle10g Lite release 10.2.0.1, followed by installing Oracle10g Lite patches 10.2.0.2 and additional one-off patches. Also configure the Olite10g. See *Installing and Configuring the Mobile Server*, page 3-2.
2. Implement the Oracle Mobile Application Foundation.

## Installing and Configuring the Mobile Server

This section provides steps to install and configure Oracle Database Lite 10g in standalone mode. This procedure installs and configures the mobile server on the application server that processes connections from mobile users.

### Installing Oracle Lite 10G R2 Mobile Server:

The current supported Oracle Lite version is 10.2.0.2. It should be installed by first installing Oracle Lite 10gR2 (10.2.0.1) followed by Oracle Lite 10gR2 10.2.0.2 patchset.

**Important:** Oracle Lite server can be started only from the server it was installed on. For example, if it was installed on **host1**, it cannot be started from **host2** even if the \$ORACLE\_HOME in host1 is accessible from host2.

Use this procedure to install the Oracle Lite 10g R2 Mobile Server and its associated patchset:

1. Install the Oracle Lite 10g R2 server.

Oracle Lite 10g R2 can be downloaded from Oracle Technology Network (OTN):

Search for Part#: **B24221-01**

Oracle® Database Lite 10g Release 2 (10.2.0.1.0) for your platform.

Follow the appropriate platform-specific steps in the *Installing the Mobile Server* section of the *Oracle Database Lite 10g Installation and Configuration Guide Release 2*.

2. Install the Oracle Lite 10gR2 10.2.0.2 Patchset.

Oracle Lite 10gR2 10.2.0.2 Patchset can be downloaded from *Oracle Metalink*:

<http://metalink.oracle.com>

Search for Patch#: **5047108**

3. Install Oracle Lite 10gR2 10.2.0.2 one off patches.

Oracle Lite 10gR2 10.2.0.2 one off patches can be downloaded from *Oracle Metalink* as well:

Search for Patch#: **5255008** and **5173448**

### **Editing the Environment Variable:**

Complete the following procedure to set all relevant environment variables to implement the Oracle Mobile Application Foundation:

1. Log in to the operating system as "applmgr" (the owner of the Applications file system) and set the environment. Execute the script APPSORA.env (UNIX) or envshell.cmd (Windows) to source the applications environment. For additional information, see Setting the Environment in the *AD Utilities Reference Guide*.

2. Copy, edit, and execute the appropriate file.

#### **For Unix:**

1. Copy the file \$ASG\_TOP/admin/template/asgovars\_ux.env to \$OAH\_TOP/admin/scripts/asgovars.env.
2. Edit \$OAH\_TOP/admin/scripts/asgovars.env to set the values for the following variables:
  - DISPLAY = "0.0"
  - ORACLE\_HOME = [location of the Oracle Lite 10g installation]
  - JAVA13\_HOME = [location of the JDK 1.5 installation]
3. Execute the following command: **\$OAH\_TOP/admin/scripts/asgovars.env**

**Important:** The script asgovars.env (UNIX) or asgovars.cmd (Windows) sets all environment variables for a mobile implementation.

#### **For Windows:**

1. Copy \$ASG\_TOP\admin\template\asgoavars\_nt.env to \$OAH\_TOP\admin\scripts\asgovars.cmd.
2. Edit \$OAH\_TOP\admin\scripts\asgovars.cmd to set the values for the following variables:
  - Set ORACLE\_HOME = [location of the Oracle Lite 10g installation]

- Set JAVA13\_HOME = [location of the JDK 1.5 installation]
3. Execute the following command: \$OAH\_TOP\admin\scripts\asgovars.cmd

**Important:** The script asgoavars.env (UNIX) or asgovars.cmd (Windows) sets all environment variables for a mobile implementation.

### Starting and Stopping the Mobile Server :

Use these procedures to start and stop the Mobile Server:

#### To Start the Mobile Server

1. Logon to <MOBILE\_SERVER\_HOST>
2. Source the \$ASG\_TOP/admin/template/asgovars.env
3. cd \$ORACLE\_HOME/mobile/server/bin/
4. Execute runmobileserver script.

Please edit the runmobileserver script to add nohup to the command to start java.

#### To Stop the Mobile Server

1. Logon to <MOBILE\_SERVER\_HOST>
2. Find and kill the mobile server processes started previously.

### Running Installation Manager:

Perform the following procedure to run the Installation Manager:

1. Source the APPLSYS.env to setup environment variables.
2. Use this java command to run InstallationManager:

```
java -Xms32m -Xmx1536m -DJTFDBCFILE=<DBC_NAME> -
DAFLOG_ENABLED=TRUE -DAFLOG_LEVEL=STATEMENT
oracle.apps.asg.setup.InstallationMgr <DB_HOST_NAME>
<DB_PORT_NUM> <DB_SID> <APPS> <APPS_PASSWORD> MOBILEADMIN
<MOBILEADMIN_PASSWORD> <PROD_TOP> <INI_FILE> <ZIP_FILE>
```

Where:

---

<PROD\_TOP>

<INI\_FILE>

<ZIP\_FILE>

---



JTM_TOP	jtm/JTM.ini	html/download/jtm.zip
CSM_TOP	CSW.ini	html/download/jtm.zip
CSM_TOP	CSML.ini	html/download/CSML.zip
CSM_TOP	CSML.ini	html/download/CSW.zip

**Important:** The above java command should be run four times, once for each row values specified in the above table.

### Modifying \$ORACLE\_HOME/mobile/server/bin/webtogo.ora:

Use the procedure to modify the webtogo.ora:

1. Edit the [FILESYSTEM] section by adding this line:

```
ALTERNATE_DIR=$CSM_TOP/html/download/CSML=/CSML&$CSM_TOP/html
/download/CSW2=/CSW2&$CSM_TOP/html/download/MYSETUP=/MYSETUP
```

In this line, \$CSM\_TOP should be replaced with the actual full-path values for your instance. For example: \$CSM\_TOP => /u01/crmtstappl/csm/12.0.0

**Important:** If you are upgrading to R12 from a 11i instance, you should use the following ALTERNATE\_DIR parameter:

```
ALTERNATE_DIR=$CSM_TOP/html/download/CSML=/CSML&$
CSL_TOP/html/download/CSL2=/CSL2&$JTM_TOP/html/downloa
d/CSL2=/CSL2&$CSM_TOP/html/download/CSW2=/CSW2&$CSM
_TOP/html/download/MYSETUP=/MYSETUP
```

2. Start the Mobile Server and access the login page:

[http://<host\\_name>:port/webtogo](http://<host_name>:port/webtogo):

To make sure the changes in Step 1 haven't affected webtogo from properly running (improper settings can do that), start mobile server and access the logon page.

The page should show a logon screen. If there is an error in the page, check for typos in the parameter described in Step 1.

3. Edit the [EXTERNAL\_AUTHENTICATION] section by adding the following:

```
CLASS=oracle.apps.asg.setup.AsgAuthenticator EXPIRATION=0
```

4. Edit the [CONSOLIDATOR] section by adding the following line:

JOB\_ENGINE\_AUTO\_START=NO

### Modifying

**\$ORACLE\_HOME/mobile\_oc4j/j2ee/mobileserver/applications/mobileserver/setup/common/webtogo/webtogo.ora:**

Use this procedure to modify the webtogo.ora:

1. Edit the [WEBTOGO] section by replacing the existing JAVA\_OPTION parameter with the following line:

```
JAVA_OPTION=-Xms20m -Xmx50m -Djbo.SQLBuilder=OLite  
-Djbo.TypeMapEntries=Oracle
```

### Setting Up External Authentication:

Use this procedure to set up external authentication:

1. Open the file **application.xml** in  
\$ORACLE\_HOME/mobile\_oc4j/j2ee/mobileserver/config and add the  
following line to it:

```
<library path="$JAVA_TOP" / >
```

Replace \$JAVA\_TOP with the actual full-path value for your instance. Add this line  
*as the last line* of all the <library path="" /> lines.

### Configuring Platforms:

**Note:** If you are using a Windows NT server, you can terminate the webtogo process from the Task Manager.

Use these procedures to configure the Mobile Field Service Laptop platform and to enable the Oracle Lite PPC 2000 ARM platform:

#### Configuring Mobile Field Service Laptop Platform

1. Login to Oracle Lite Mobile Manager ([http://<host\\_name>:<port>/webtogo](http://<host_name>:<port>/webtogo)) with  
user/password: administrator / <PASSWORD>
2. Go to Mobile Devices tab and Platforms sub tab.
3. Search for all platforms for Language English.
4. Select the platform "Oracle Lite Web" and click the **Extend** button.
5. Enter Following values and click OK:

Parameter	Value
Name:	Mobile Field Service Laptop;US
Setup INF:	/MYSETUP/csml.inf

### Mobile Manager

Oracle Database Lite 10g Mobile Manager

Platform: Oracle Lite WEB

Name: Mobile Field Service Laptop;US

Setup INF: /MYSETUP/csml.inf

Bootstrap: DeviceInfo

Enabled: Yes

Type: WING2\_x86\_US\_WTG

Base Platform: Oracle Lite WEB

Cancel OK


- Go to the URL below, and you should see the Mobile Field Service Laptop link in the platforms listed.

`http://<host>:<port>/webtogo/admin/console/setup/setuppage.uix`

### Enabling Oracle Lite PPC 2000 ARM platform

- Login to Oracle Lite Mobile Manager (`http://<host_name>:<port>/webtogo`) with user/password: administrator / <PASSWORD>
- Go to Mobile Devices tab and Platforms sub tab.
- Search for all platforms for Language English.
- Click the link for the Oracle Lite PPC 2000 ARM Platform.
- Select **Enabled = Yes** and click OK.

### Mobile Manager

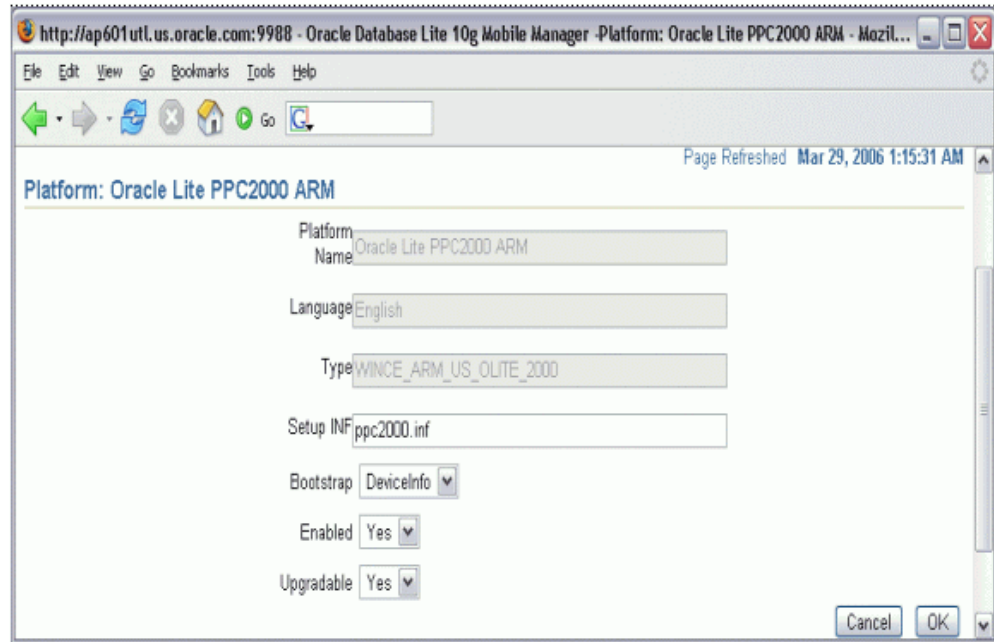

6. Go to the URL below, and you should see the Oracle Lite PPC 2000 ARM link in the platforms listed.

<http://<host>:<port>/webtogo/admin/console/setup/setuppage.uix>

## Installing the Oracle Database Lite 10g Mobile Server on Additional Servers

You can set up the mobile server on additional servers to support a greater number of mobile users and distribute the load.

For each additional server you want to set up, follow the steps in "Installing and Configuring the Mobile Server", page 3-2 . When prompted to install the repository, specify **NO**. The mobile server repository has already been installed as part of the primary server setup.

**Note:** In the webtogo.ora file, the parameter `TRACE_FILE_POOL_SIZE` is set to 5 by default. Under this default setting, only five users will synchronize when trace is enabled. Therefore, when trace is enabled, please set the parameter to a large number like 1000.

## Setting Profile Options for Mobile Application Foundation

Set the following profile options for ASG and JTM. The table indicates the profile name,

a brief description, the level at which to be set, and the recommended value (the default value).

Profile	Description	Level to be Set	Recommended (Default) Value
ASG: Auto Upgrade All Users	<p>This profile option can be used to turn off the controlled upgrade option.</p> <p>When this profile is enabled as <i>Yes</i> the controlled upgrade option for the administrator would not be available. This is the same behavior for mobile upgrades in the previous releases (all users will be upgraded, the next time they synchronize after a mobile application patch is applied).</p>	Site, Application (Oracle Mobile Application Foundation), Responsibility, and User	Default is No. The controlled upgrade feature is turned on by default. This means whenever a new patch is applied, the administrator has to use the controlled upgrade administration screens to rollout the mobile upgrade to the users.

Profile	Description	Level to be Set	Recommended (Default) Value
ASG: Enable Mobile User	<p>You can gain access to the Mobile Field Service application, regardless of your associated responsibilities. When you are mapped to multiple responsibilities and all responsibilities have rights to access the Mobile Field Service application, you can access the application with the oldest responsibility (gained access first).</p> <p>The Responsibility's <b>Application</b> field value <i>must be populated with Field Service</i>.</p>	Site, Application, Responsibility, and User	<ul style="list-style-type: none"> <li>• <i>Yes</i>: Set this profile option to Yes at the responsibility level for the responsibility needing access to the Mobile Field Service application. All users that are associated with that responsibility are granted access rights to the Mobile Field Service application.</li> <li>• <i>No</i>: If this profile option is set to No, all users that are associated with that responsibility cannot access the Mobile Field Service application.</li> </ul>
JTM: Application Conflict Rule	This profile option is used to determine whether updates on the client will go through or are rejected when a record is changed on the CRM instance after the particular record was sent to the client.	Site, Application, Responsibility, and User	Default is Server Wins.

Profile	Description	Level to be Set	Recommended (Default) Value
JTM: Concurrent Program History Level	Keeps track of how many times the JTM Master concurrent program has run.	Site, Application, Responsibility, and User	Numeric value.
JTM: Mobile Applications Enabled	This setting dictates if the mobile applications will be used.	Site, Application, and Responsibility	Y if you want to enable mobile applications. N will disable updates to mobile devices.
JTM: Time Picker Format (HH12)	Determines the display in the time drop down for laptop.	Site, Application, Responsibility, and User	Default is 24.

## Scheduling Concurrent Programs for Mobile Application Foundation

Schedule the concurrent programs listed in the following table for the Oracle Mobile Application Foundation. For instructions on how to set up concurrent programs, refer to the Oracle Applications System Administrator's Guide.

Name	Description	Default (Recommended) Schedule
PROCESSES UPLOADED MOBILE DATA	Processes uploaded mobile data and applies it to the enterprise system.	Every 30 seconds.
MANAGES MOBILE USERS	Creates or removes mobile users automatically based on assigned mobile responsibilities.	Manual. Schedule as required.

Name	Description	Default (Recommended) Schedule
JTM MASTER CONCURRENT PROGRAM	The JTM master concurrent program, which runs all concurrent jobs registered by mobile applications.	TRANSACTION: every five mins.  LOOKUP: once a day.  INVENTORY: once a day.  PURGE: once a week. See "Setting Profile Options for Mobile Application Foundation", page 3-8 .



---

# Implementing Oracle Mobile Field Service

This chapter covers the following topics:

- Overview
- Installing the Mobile Application Patches
- Confirming Required Enterprise Setups
- Setting Profile Options for Oracle Mobile Field Service
- Scheduling Concurrent Programs for Oracle Mobile Field Service
- Creating and Managing Mobile Users
- Testing the Mobile Field Service Application Implementation

## Overview

This chapter describes how to implement Oracle Mobile Field Service. The following are the basic steps needed to do this:

1. Verify dependencies.  
See "Oracle Mobile Field Service Installation Dependencies".
2. Implement the Mobile Application Foundation.  
See Chapter 3, "Implementing Oracle Mobile Application Foundation", page 3-1.
3. Publish the mobile application.  
See "Installing the Mobile Application Patches", page 4-2 .
4. Confirm the required enterprise setups.  
See "Confirming Required Enterprise Setups", page 4-2 .
5. Set profile options for Oracle Mobile Field Service.

See "Setting Profile Options for Oracle Mobile Field Service", page 4-5 .

6. Schedule concurrent programs.

See "Scheduling Concurrent Programs for Oracle Mobile Field Service", page 4-17 .

7. Create and manage mobile users.

See "Creating and Managing Mobile Users", page 4-19 .

8. Test the mobile application implementation.

See "Testing the Mobile Field Service Application Implementation", page 4-19 .

## Installing the Mobile Application Patches

Refer to the *Mobile Applications: Patch Information* document (Note 241425.1 on Oracle *MetaLink*) for details on the correct patches, dependencies, and the like.

Depending on the Oracle Mobile Field Service application you are implementing, install the required patches using the AD utility.

Complete the following steps to install the required patches for the desired Oracle Mobile Field Service application:

1. Shutdown the Oracle9i Lite mobile server.
2. Install the required patches using the AD utility.
3. Start the Oracle9i Lite mobile server.
4. After applying the patch, ensure that the JTM concurrent programs are running.

See "Scheduling Concurrent Programs for Oracle Mobile Field Service", page 4-17 .

## Confirming Required Enterprise Setups

This section describes how to set up the enterprise-side system so certain mobile features work properly on the mobile computer device.

### Setting Up Service Requests:

The following table lists the service request setups that can be used to create, view, and update tasks in an Oracle Mobile Field Service application.

Component	Required or Optional
Service Request Statuses	Required
Service Request Severities	Required
Service Request Types	Required
Service Request Urgencies	Optional
Problem Codes	Optional
Resolution Codes	Optional
Service Request Templates	Optional

For details, refer to the *Oracle TeleService Implementation Guide*.

### Linking Service Request Statuses to Service Request Types

Service request statuses have to be linked to service request types. Use the following procedure:

1. Switch to the Field Service Manager responsibility.
2. Navigate to `Field Service Setup > Service Requests > Request Types`.
3. Click to select a service request type from the table.
4. Click **Related Statuses**.
5. In the form, link Service Request Statuses to the Service Request Type.
6. Click **Save**.
7. To finish, close the form.

For more information, refer to the *Oracle TeleService Implementation Guide*.

### Setting Up Tasks:

The following table lists the task setups that can be used to create, view, and update tasks in an Oracle Mobile Field Service application.

Component	Required or Optional
Task Statuses	Required
Task Status Transitions	Required
Task Types	Required
Task Priorities	Required
Task Templates	Optional

Set up the required components listed above. For details, refer to the *Oracle Field Service Implementation Guide* for these Field Service-specific setups.

- The task status that is selected during service-task-creation is the one from the Field Service profiles: CSF: Default In Planning Status. You cannot change this.
- When a service task is created, there will be no task assignment automatically created.

### Setting Up Oracle Field Service Report:

Oracle Field Service Report is part of the Oracle Field Service application and is used to report all material, expense, and labor transactions. From the Oracle Field Service Report screen, you can update inventory, install base, and charges.

When material, expense, and labor transactions are recorded in one of the Oracle Mobile Field Service applications, all transactions are shown and updated to inventory, install base, and charges from the Oracle Field Service Report.

Ensure that Oracle Field Service Report is fully implemented and set up as described in the Oracle Field Service Implementation Guide.

### Setting Up Install Base:

This procedure is only required if you are using Install Base. If so, Install Base should be set up to support Install Base updates when doing material transactions in an Oracle Mobile Field Service application. This should be set up after performing the setup steps necessary for debrief reporting.

An Oracle Mobile Field Service application supports two scenarios that affect Install Base:

- Removing a part
- Installing a new part

The following procedures are required to set up Install Base:

- Setting up system items for Install Base transactions
- Setting up Install Base profile options
- Removing and installing parts in Oracle Mobile Field Service/Laptop

See Appendix B, "Item Handling", page B-xi for complete details.

**Note:** Changing the install base replication profiles during operation becomes effective when the value is changed. Information will not be changed with retroactive effect based on the profiles.

### Setting Up Counters:

The set up of counters is only required if you are using Install Base. The following are the setups for counters that must be performed in order to report counter readings in an Oracle Mobile Field Service application:

- Counters
- Counter groups
- Counter properties
- Miscellaneous reading types

Refer to the *Oracle TeleService Implementation Guide*.

**Note:** Only counters of type REGULAR are supported by the Oracle Mobile Field Service applications. Both counter values and counter property values can be entered in an Oracle Mobile Field Service application.

### Setting Up Messaging:

Confirm that Messaging has been successfully installed and implemented.

## Setting Profile Options for Oracle Mobile Field Service

You can set profiles within the Forms or Self Service applications (Functional administrator: Core Services > Profiles).

The following sections describe Oracle Mobile Field Service features that are controlled through profile settings.

**Setting Up Profile Options for Oracle Mobile Field Service/Laptop:**

For Oracle Mobile Field Service/Laptop, set the profile options listed in the following table. The table indicates the profile option name, a brief description, and available options.

Profile	Description	Options
CSM: Time Reasonability Check Apply	<p>Reasonability checks to ensure that valid inputs are entered during debrief and task creation on the mobile computer device.</p> <p>The following reasonability checks must be added to Oracle Mobile Field Service/Laptop, to ensure quality of data entered by the technician:</p> <ul style="list-style-type: none"> <li>Values entered for Planned Start date/time must be greater than Incident date/time on SR header for create/update of task</li> <li>Values entered for Planned End date/time must be greater than Incident date/time on SR header for create/update of task</li> <li>Values entered for Service Date and Labor Start date/time on Debrief may not be less than Incident date/time on SR header</li> <li>Values entered for Service Date on Debrief may not be less than Incident date/time on SR header</li> <li>Values entered for Labor Start date/time and Service Date on Debrief may not be future-based on current date/time on the device</li> </ul>	<ul style="list-style-type: none"> <li><i>Yes</i>: default</li> <li><i>No</i></li> </ul>

Profile	Description	Options
	<ul style="list-style-type: none"> <li>Values entered for Labor End date/time and Service Date on Debrief line item may not be future-based on current date/time on the device</li> <li>Values entered for Labor End date/time and Service Date on Debrief may not be less than Incident date/time on SR header</li> </ul>	
CSM: Labor Line Total Check	<p>Reasonability check to ensure total time at site does not exceed total labor time plus delta.</p> <p>For debrief reporting in Oracle Mobile Field Service/Laptop, the difference between max (last labor end date/time) and min (earliest labor start date/time) must not be more than one hour greater than the sum of labor line durations.</p> <p>Max - min &lt;= sum of labor lines + T</p> <p>T is the time in hours. The profile setting will provide the value for this.</p>	<ul style="list-style-type: none"> <li>0: Default. The check is not valid.</li> <li>1: T = 1</li> <li>2: T = 2</li> </ul>



Profile	Description	Options
CSM: Purge Interval (Days)	Defines the number of days before purging data from Oracle Mobile Field Service/Laptop. This is executed only for closed tasks. For example, if this profile is set to 5, a closed task after five days is purged from the pocket PC. The associated service request is also purged if there are no other open tasks for that service request.	A value representing the number of days before data is removed from Oracle Mobile Field Service/Laptop. If you specify zero days, the data is never removed.
CSF: The unit of measure for hours	You must define this setting to correspond with the value in the MTL_UNITS_OF_MEASURE table.	-
CSF: The unit of measure for minutes	You must define this setting to correspond with the value in the MTL_UNITS_OF_MEASURE table.	-
CSF: Default Debrief Business Process	The business process selected with this profile option is the default business process within the Debrief user interface.	All defined business processes
CSF: Default Debrief Service Activity Code	The service activity code selected with this profile option is the default service activity code within the Debrief user interface.	All defined service activity codes
CSF: Default Distance Unit	The default unit of measure for distance	<ul style="list-style-type: none"> <li>• <i>Miles: Default</i></li> <li>• <i>Kilometers</i></li> </ul>

Profile	Description	Options
CSF: Capture travel information	This profile determines if capturing travel information is enabled, within the Debrief user interface.	<ul style="list-style-type: none"> <li>• <i>None</i>: Default</li> <li>• <i>Time</i></li> <li>• <i>Distance</i></li> </ul>
CSF: Default Return Reason (For Material Debrief)	The return reason selected with this profile option is the default return reason during Debrief.	All defined return reasons
CSF: Default Commit task status	This profile option defines the default status when the task is committed.	All defined task statuses. <i>Assigned</i> is the default.
CSFW: Planned Task Window	Planned task window in days	-
CSF: Default Task Type for Personal Tasks	Default task type for personal tasks	All defined task types. The <i>Private</i> attribute is set to <b>Yes</b> .
CSF: Default Task Status for Personal Tasks	Default task status for personal tasks	<p>All defined task statuses.</p> <p>The <i>Assignment</i> and <i>Assigned</i> attributes are set to <b>Yes</b>.</p> <p>The <i>Rejected</i>, <i>On hold</i>, <i>Cancelled</i>, and <i>Schedulable</i> attributes are set to <b>No</b>.</p>

### Setting Up Profile Options for Oracle Mobile Field Service/Pocket PC:

Set the profile options listed in the following table. The table lists the profile option name, a brief description, and available options.

Profile	Description	Options
CSM: Restrict Number of Items to Search for in LOV	Limits the number of search results that are displayed in the search screens, if there are too many items. You can limit the search by using a filter to reduce the number of items retrieved in the search.	Can be <b>1</b> to any number. The default is <b>100</b> .
CSM: Enable Create Task	Enables or disables the create task functionality.	<ul style="list-style-type: none"> <li>• <i>Yes</i>: default</li> <li>• <i>No</i></li> </ul>
CSM: Enable Create SR	Enables or disables the create service request functionality.	<ul style="list-style-type: none"> <li>• <i>Yes</i>: default</li> <li>• <i>No</i></li> </ul>
CSM: Enable Update Task Assignment Status	Enables or disables the functionality to update the task assignment status.	<ul style="list-style-type: none"> <li>• <i>Yes</i>: default</li> <li>• <i>No</i></li> </ul>
CSM: Enable View Customer Product	Enables or disables the functionality to view a customer product.	<ul style="list-style-type: none"> <li>• <i>Yes</i>: default</li> <li>• <i>No</i></li> </ul>

### Setting Up Profile Options common to Oracle Mobile Field Service/Pocket PC and Oracle Mobile Field Service/Laptop:

Set the profile options listed in the following table. The table lists the profile option name, a brief description, and its available options.

Profile	Description	Options
CSM: Maximum Attachment Size	A technician can upload Service Request attachments, such as photos, drawings, and diagnostic data, from their pocket PC to the enterprise. You can view uploaded data on the enterprise, after synchronization completes successfully. The Attachments' sizes are limited to the value entered in this profile.	The value of this profile represents the size in Mega Bytes (MB) of the attachment for each Service Request/task for each Sync. If this profile option is not populated, the value is considered zero and you cannot upload or download attachments.
JTM: Mobile Applications Enabled	<ul style="list-style-type: none"> <li><i>Laptop</i>: Set the profile at the Oracle Field Service/Laptop responsibility level to <b>Y</b>. Only after setting the profile value, can you enable hooks or business events.</li> <li><i>Pocket PC</i>: Set this profile at the Oracle Field Service/Palm responsibility level to <b>Y</b>. Only after setting this profile value, can you enable hooks or business events.</li> </ul> <p><b>Note:</b> The Oracle Field Service/Palm responsibility is used for the Oracle Mobile Field Service/Pocket PC application.</p>	<ul style="list-style-type: none"> <li>Y: Yes</li> <li>N: No</li> </ul>

Profile	Description	Options
JTM: Application Conflict Rule	Enables Oracle Mobile Field Service/Laptop to handle updates to the database from laptop and Pocket PC.	<ul style="list-style-type: none"> <li>• <i>Client Wins</i>: Changes made by the mobile user are always applied to the enterprise database. No timestamp checking is executed.</li> <li>• <i>Server wins</i>: Changes made by the mobile user are applied to the enterprise database if the record has not been modified since the mobile user last synchronized. If the record was modified in the meanwhile, the mobile user's change is not applied and becomes a deferred transaction.</li> </ul>
CSM: Number of Previously Closed Service Requests	Defines the number of previously closed service requests to be replicated. It is recommended that you send down three to five service requests. Do not set very high values because of laptop computer limitations on data set size.	Use <b>0</b> to disable the history functionality. The default is <b>0</b> .
CSM: Synchronous Service History Collection	Sets how previously closed service requests are collected (performance is a factor).	<ul style="list-style-type: none"> <li>• <i>Yes</i>: synchronous history collection</li> <li>• <i>No</i>: asynchronous history collection. This is the default.</li> </ul>
CSM: Item Category Filter	Use to filter item categories.	-
CSM: Item Category Set Filter	Use to filter item category sets.	-

Profile	Description	Options
CSM: Number of IB Items at Location	The number of install base items to be downloaded for a given customer location.	Can be 0 to any number. The default is 0.
CSF: Business Process	Enables you to specify the order of task completion for the field service representative.	<ul style="list-style-type: none"> <li>1: The field service representative is to work on one task at a time in a fixed order (ordered by scheduled start date).</li> <li>2: The field service representative can only work on one task, but in any order. Only the task with a <b>Working</b> status can be updated. If no task is at a <b>Working</b> status, the status of all open tasks can be updated. The field service representative can select a task by setting its status to <b>Working</b>.</li> <li>3: The field service representative can work on any number of tasks in any order. The working flag is ignored, in this scenario.</li> </ul>
CSF: Update Planned/Scheduled Times Allowed	Specifies whether field service representatives are allowed to change the planned or scheduled times of the tasks they have received on the laptop computer.	<ul style="list-style-type: none"> <li>Yes</li> <li>No</li> </ul>

Profile	Description	Options
CSF: Allow Overlapping Debrief Lines	Setting the profile to <b>No</b> does not allow overlapping labor lines within a task. Therefore, a field service representative cannot have two labor lines for the same time period. The second labor line starts only after the first one has finished.	<ul style="list-style-type: none"> <li>• <i>Yes</i>: The technician can enter overlapping actual start and end times for various assignments for a given day.</li> <li>• <i>No</i>: Default. The technician cannot enter the overlapping times.</li> </ul>
CSM: Notifications Scope	Defines to whom messages can be sent.	<ul style="list-style-type: none"> <li>• <i>Resource Group</i>: Default</li> <li>• <i>All Users</i></li> </ul>
Service: Inventory Validation Organization	Defines to whom messages can be sent.	<ul style="list-style-type: none"> <li>• <i>Resource Group</i>: Default</li> <li>• <i>All Users</i></li> </ul>

### Setting Up Non-Oracle Mobile Field Service Profile Options for Oracle Mobile Field Service Applications:

Set the profile options listed in the following table. The table lists the profile option name, a brief description, and available options.

Profile	Description	Options
Client Timezone	Timezone in which the device is present (field service representative's local time).	-
CSF: Default In Planning Status	-	-

Profile	Description	Options
ICX: Date format mask	Date display format: <ul style="list-style-type: none"> <li>• DD/MM/YYYY</li> <li>• YY/MM/DD</li> <li>• MM/DD</li> <li>• DD/MM</li> </ul>	-
JTM: TimePicker Format (HH24/HH12)	Time displayed in 12 or 24 hours.	-
Server Timezone	Timezone in which the server is present.	-
ICX: Numeric characters	Your numeric characters preference	-
HZ: Reference Territory	This is the default territory that is used to locale for name and address formatting. If this value is null, the NLS territory for the current session is used.	-
Time unit of measure class	This is the unit of measure class, representing time.	<ul style="list-style-type: none"> <li>• <i>Time</i>: default</li> <li>• <i>Period</i></li> </ul>
Task Manager: Default assignee status	This profile defines the assignee's task status default value.	All defined task statuses. <i>Assigned</i> is the default.
Task Manager: Owner type for a task	This profile defines the default owner type for the task	All defined owner types.



Profile	Description	Options
HZ: Language for Country Display	This is the default language that is used to translate the country name for foreign address formatting. This is typically the language of the country where the item is mailed.	-
HZ: Reference Language	This is the default language that is used to determine the locale for name and address formatting. If the value is null, the NLS language of the current session is used.	-

## Related Topics

Uploading Attachments, *Oracle Mobile Field Service User Guide*

Using the Messaging Page, *Oracle Mobile Field Service User Guide*

## Scheduling Concurrent Programs for Oracle Mobile Field Service

Concurrent program scheduling is categorized for the lookup, transaction, and inventory categories.

Formerly, all concurrent programs were registered with one JTM concurrent program, `MOBILE_CON_PROGRAM`. JTM has a new concurrent program, JTM Master Concurrent Program, which accepts the lookup, transaction, and inventory categories as parameters. Now, concurrent programs are categorized for the lookup, transaction, and inventory categories.

For an Oracle Mobile Field Service application, schedule the concurrent programs listed in the table below. For instructions on how to set up concurrent programs, refer to the *Oracle Applications System Administrator's Guide*.

Name	Application	Description	Default (Recommended) Schedule
Processes Uploaded Mobile Data	Laptop Pocket PC	Processes uploaded mobile data and applies it to the enterprise system	Every 1 minute
Manage Mobile Users	Laptop Pocket PC	Creates or removes mobile users automatically based on assigned mobile responsibilities	Every 1 hour
JTM: Master Concurrent Program	Laptop Pocket PC	The JTM master concurrent program, which runs all concurrent jobs registered by mobile applications	TRANSACTION: every 5 minutes LOOKUP: every 30 minutes INVENTORY: once a day PURGE: as often as required (Default is set to once per month)
Workflow Background Process	Pocket PC	Item Type: CSM Type3 Process Deferred: Yes Process Timeout: Yes Process Stuck: Yes	Start: Right at the moment Run the job: Periodically Re-run: Every 0.5 minute Apply the Interval: From the completion of the prior run

**Note:** If there is a major delay for the Workflow Background Process to handle the item type CSM TYPE3 processes, then you should schedule more than one Workflow Background Process concurrent programs for item type CSM TYPE3. The number of Workflow Background Process concurrent programs to be scheduled depends on the workload of how many CSM TYPE3 processes are to be processed. This is important to

boost the performance and ensure that mobile users can get online updates promptly.

## Creating and Managing Mobile Users

Users who have the Oracle Field Service/Palm responsibility assigned to them have access to the Oracle Mobile Field Service/Pocket PC application. Likewise, users who have the Oracle Field Service/Laptop responsibility assigned to them have access to the Oracle Mobile Field Service/Laptop application. To create users for an Oracle Mobile Field Service application, create the users as described in the *Oracle Field Service Implementation Guide*. Ensure that the following procedures have been completed:

- Setting Up Employees
- Setting Up Resources
- Setting Up Field Service

After completing these procedures, assign either the Oracle Field Service/Palm or Oracle Field Service/Laptop responsibility to the users, depending on the Oracle Mobile Field application they are using. Access to the Oracle Mobile Field Service application is based on the same usernames and passwords as the enterprise system.

There is a concurrent program in the Mobile Application Foundation that periodically allocates resources for users that have a mobile responsibility, so there will be a delay between when the responsibility is assigned and when the change will take effect. Refer to "Scheduling Concurrent Programs for MAF", page 3-11 for information on how to manually run the concurrent program to expedite the creation of a new user.

Mobile users can change their passwords in the Forms application or by requesting that the system administrator make this change for them. Both of these topics are described in the *Oracle Applications System Administrator's Guide*.

If you remove the Oracle Field Service/Laptop responsibility or Oracle Field Service/Palm responsibility from a user, that user will no longer be able to use the Oracle Mobile Field Service application and synchronize. However, the application will remain on his mobile computer device.

For further details about creating and managing mobile users, refer to Note 219019.1 on *OracleMetaLink*.

## Testing the Mobile Field Service Application Implementation

Once you have implemented Oracle Mobile Field Service, you should then test that the implementation is successful.

## Running the Test:

### Steps

Complete the following steps to verify that the implementation of the Oracle Mobile Field Service application was successful:

1. Create a test user and then assign the user either the Oracle Field Service/Laptop or Oracle Field Service/Palm responsibility, depending on the type of Oracle Mobile Field Service application.

**Note:** The Oracle Field Service/Palm responsibility is used for the Oracle Mobile Field Service/Pocket PC application.

2. Install the Oracle Mobile Field Service application on the desired test mobile computer device.

For details on how to install Oracle Mobile Field Service/Laptop or Oracle Mobile Field Service/Pocket PC, refer to Appendix A, "Installing Oracle Mobile Field Service", page A-1.

3. From the Field Service Dispatch Center, create a task and then assign it to the test user.
4. Synchronize the mobile computer device.  
The Oracle Mobile Field Service application receives the task.
5. Change the task assignment status on the mobile computer device and then synchronize.
6. Confirm that the task status update is reflected in the dispatch center.

### Final Checks

If you have problems running the Oracle Mobile Field Service application, ensure that you have met the following requirements:

- Material items must be created and associated with the field service representative's inventory.
- The task state transitions must be set up in Field Service.
- Field service representatives must have a location associated with them.
- A request or task must have a location before it can be scheduled.
- The Oracle Field Service/Laptop responsibility or Oracle Field Service/Palm responsibility must be granted to you, depending on the Oracle Mobile Field

Service application that you are using.

**Note:** The Oracle Field Service/Palm responsibility is used for the Oracle Mobile Field Service/Pocket PC application.

- Labor and expense items need to be set up.
- If you are still experiencing problems, then use the diagnostics described in "Diagnostic Testing Oracle Mobile Field Service", page 7-3 .



---

## Implementing the Wireless Option

This chapter details the dependencies and steps necessary to perform a successful implementation of Oracle Wireless Option for Service. This process includes installing and configuring the Oracle AS Wireless Edition, the implementation of the necessary Oracle Applications that support the Wireless Option, and, finally, the implementation of the Wireless Option for Service.

This chapter covers the following topics:

- Oracle Wireless Solution for Service Implementation Overview
- Architectural Overview
- Minimum Software Requirements
- Minimum Hardware Requirements
- Installation and Dependency Verification
- Terminology
- Oracle AS Wireless Edition Setup
- Setting Proxies
- Set Location Services
- Wireless Application Implementation Overview
- Implementation Tasks for the Wireless Option
- Setting up the User with Wireless Responsibility
- Setting up the Profile Options for the Mobile Field Service Wireless User
- Setting up Default Organization and Subinventory
- Setting Profile Options for Task Summary Display, Date Format
- Setting up the System for Route Directions
- Setting up the Email Server Profile Option
- Setting up the Spares Management Order Parts Profile Option

- Set up Master Service to Point to Field Service for AS (9.0.4)
- Task Scheduling and Assignment
- Verifying the Implementation
- Additional Information to Maintain the Wireless Option

## Oracle Wireless Solution for Service Implementation Overview

Oracle Wireless Option for Service enables field representatives access to mission-critical data by accessing the enterprise database through a wireless device. The field representative can also perform certain tasks using the voice interface when he/she is out of wireless coverage.

The Oracle Wireless Option is a solution for field service representatives on tethered mobile devices. This means that the device has a continuous connection to the Oracle Enterprise Applications. Field service representatives connect to this application by choosing a URL on their wireless device's web browser. After completing the required login, they can access real-time information from the enterprise database.

With this solution, the field service engineer can carry on his daily tasks using any mobile device with internet capabilities (with a web browser). For the voice interface only a phone is required, which does not have to be a wireless phone.

Oracle Wireless Option for Service can be deployed over any protocols, including WML, HDML, Tiny HTML or Voice XML. This solution works over any wireless standard such as CDMA, CDPD, GSM, GPRS, HSCSD, and TDMA. To make this process possible, data is extracted from Oracle Enterprise Applications as XML data, which the Oracle Application Server then transforms into an appropriate markup language for the device that is connected through the internet/intranet to the AS wireless server.

## Technology, Requirements, and Performance

Field Service Wireless enables read and write functions to the enterprise database through a wireless connection between a mobile device, the Internet Service Provider (ISP), and the AS wireless edition.

The following components are involved:

- Enterprise Database: This is the enterprise data that field service engineer will access through a wireless device.
- Enterprise Applications Web Server: This is the http server used to connect to enterprise applications.
- Oracle AS Wireless Edition (ASwe): This server is used to transform XML to any markup language (WML, HDML, Voice XML).



- **WEB-enabled wireless device:** This device is capable of displaying Web pages in a web-enabled browser.

## Architectural Overview

This section provides an overview of the architectural structure that underpins the functionality of Oracle Wireless Option for Service.

### Presentation Layer

This layer is responsible for look and feel of the application. Java server pages are used to generate Simple Result Mobile XML, a XML language understood by Oracle Application Server, which is transformed into different mark-up languages depending on the wireless device. This data is then sent back to the device in the form of a HTTP response to the original HTTP request made by the device.

### Control Layer

The flow of the application is controlled by a series of Java Server Pages.

### Application Logic

All the Business APIs are written in PL/SQL. They are accessed using Java Beans. If the data can be accessed using database views, no PL/SQL is required and data is fetched directly from the application database using Java Beans.

Following are the steps for the flow of information.

1. The device sends a request to ASWE through the gateway.
2. ASwe sends the request to the Enterprise Application server.
3. A JSP is invoked and the request is processed.
4. The JSP generates the Mobile XML.
5. The Mobile XML forms the response back to the ASwe.
6. ASwe transforms the XML data to appropriate mark up language depending on the device using appropriate style sheets and transformers.
7. The response is sent back to the device for display.

## Minimum Software Requirements

The following software is required to run the Oracle Wireless Solution for Service

application:

- Field Service 11.5.10
- Oracle AS Wireless Edition
  - Release 10g (9.0.4.0.X)

**Note:** Any required patches for Oracle AS Wireless can be found on OracleMetaLink.

- Use the Installation Guide for Oracle AS Wireless Edition for additional information and verification.

## Minimum Hardware Requirements

Please refer to the installation guide of Oracle AS Wireless Edition for details.

### Hosting Option

Telephone companies have a wireless network in place for cell phone users and provide wireless carrier services. The telephone companies also provide end users with a Wireless Portal to access the web and other content. With this alternative, the telephone company completely operates and maintains the gateways and Oracle AS Wireless Edition.

There are also specialized Wireless Portal provider, which can provide individual telephone companies or enterprises hosting services for their gateways and Oracle AS Wireless Edition. These are often referred to as wireless application service providers (WASPs). OracleMobile.com is one such WASP that can host the wireless and voice infrastructure and give value-added services such as consulting and security to corporations and enhance end user experience.

For accessing voice interface this is a preferable option.

### In House Option

Using the in-house option, businesses can run Oracle AS Wireless Edition infrastructure themselves. In this scenario, corporations have to deploy and maintain their own infrastructure. The corporations also need to have their own firewall-based security infrastructure in place.

## Installation and Dependency Verification

To verify the installation and dependencies, review the logs of all installations that have errors.

## Terminology

The following terms are used throughout this document:

- **WIRELESS\_SERVER:** This is the Web-Server for the AS Wireless Edition (for example, `http://<Wireless_Server_name>:<port number>`).
- **ENTERPRISE SERVER:** This is the web server for the Oracle Enterprise Applications (e-Business Applications). Typically, since there are a lot of URLs that access the Enterprise Applications, depending on which applications you are using (`jtflogin.jsp`, `csfwlgnm.jsp`, and so on), this would indicate the common HTML directory.

### Example

For example, if `http://<Enterprise Host>:<Port Number>/OA_HTML/jtflogin.jsp` is the JTF URL for the Enterprise application, and `http://<Enterprise Host>:<Port Number>1/OA_HTML/csfwlgnm.jsp` is the Oracle Wireless Option for Service application, then **ENTERPRISE\_SERVER** is `http://<Enterprise Host>:<Port Number>/OA_HTML`, where `<Port Number>` is the non-ssl http port for the web server.

- **MIDDLE\_TIER:** This is the wireless option of the ASwe. The middle tier is divided into two installations: infrastructure and server. In this situation, this would refer to the Server Installation where Wireless Option is selected.
- **ORACLE\_HOME:** This is where the wireless option of the Oracle ASwe is installed. Please note there might be two **ORACLE\_HOMEs** (Infrastructure Home and the middle-tier home). In this case, **ORACLE\_HOME** is used only for the middle-tier home.
- **PANAMA\_HOME:** This would be **ORACLE\_HOME/wireless**.
- **OA\_HTML** is the common html directory for all the products in the Oracle Enterprise Application.
- **OA\_HTML\_URL** is the URL for the Enterprise Applications (Example: **ENTERPRISE\_SERVER**).

## Oracle AS Wireless Edition Setup

The middle tier of the Wireless Option, which serves as the portal between the application server and a technician's wireless device, must be set up and fully configured.

## Using Release 10g (9.0.4) AS

You must perform the following tasks to configure the AS Wireless Edition Release 10g (9.0.4) to support the Directions module:

- Set Proxy Settings
- Set Location Services

## Setting Proxies

In order to properly set the proxy settings for the portal server, use the following procedure.

### Steps:

1. Log into Enterprise manager of ASwe using the URL `http://WIRELESS_SERVER:portName` (default 1810).
2. Log into Enterprise Manager as `ias_admin`. After login the screen would have at least two stand alone instances, one being the Infrastructure and the other being the middle tier.
3. Click on the Stand-alone middle tier instance.
4. Navigate to the configuration page by clicking on Wireless > Site Administration.
5. Click on the HTTP or HTTPS configuration. Enter the appropriate values.
6. Save your settings when you are finished.

## Set Location Services

Use the following procedure to set the location services for the server. eLocation is the recommended provider.

### Steps:

1. Log into Enterprise manager of ASwe using the URL `http://WIRELESS_SERVER:portName` (default 1810).
2. Log into Enterprise Manager as `ias_admin`. After login the screen would have at least two stand alone instances, one being the Infrastructure and the other being the middle tier.
3. Navigate back to Middle tier Instance > Wireless > Site Administration.

4. Click on Location Services under Component Configuration.
5. Set up the Geocoding configurations.
6. Set the Routing Configuration.
7. Set the Map Provider Configuration.
8. When you have completed the Map Provider configuration, restart all the services for the Middle tier.

## Wireless Application Implementation Overview

This section provides descriptions of the setup and configuration tasks required to implement the application successfully. This topic group tells how to set up a user for the wireless option.

The topic covered in this section is:

- Confirming Setup of Oracle Applications

### Confirming Setup of Oracle Applications

Before setting up Oracle Wireless Solution for Service, you must install and fully implement these Oracle applications or components:

- Oracle Field Service

This includes all the Oracle applications necessary for a fully operational Field Service application. For more information on the specific steps necessary for Field Service implementation, see the *Oracle Field Service Implementation Guide*.

- Oracle Application Server Wireless Edition

Make sure you set up Oracle Application Server Wireless Edition Release 10g (9.0.4), as described in *Oracle Application Server Wireless Edition Installation Guide*. Ensure that all the steps have been reviewed and completed as necessary.

Optionally, you'll need to implement the following applications or modules to run all the functionality available for Oracle Wireless Option for Service:

- Field Service Spares Management module

This module is necessary if you are using any of the parts order or parts search functionality.

**Note:** All other Oracle applications necessary for a full installation of Field Service (for example, Oracle Install Base, Oracle Shipping,

and so on) are required for the Oracle Wireless Option for Service. See the *Oracle Field Service Implementation Guide* for details.

- Oracle Knowledge Management

This application is required if you plan to access your organization's Knowledge Base. If you want to use the Wireless Option's category search functionality, you must configure categories according to the *Oracle Knowledge Management User Guide*.

- Oracle Advanced Supply Chain Planning

The Wireless Option interfaces with Spares Management and, through Spares, uses the Available-to-Promise (ATP) functionality in the Advanced Supply Chain Planning application for its parts ordering and parts search functionality.

For information regarding the installation and implementation of these applications and components, see the appropriate documentation for each product.

## Implementation Tasks for the Wireless Option

Implementing Oracle Wireless Option for Service depends upon setting several profile options, along with application specific setups.

### Wireless Implementation Task Sequence

In order to successfully implement the Wireless Option for Service, complete these steps in the order shown in the following table:

Required	Step Title
Yes	Setting up the User with Wireless Responsibility
Yes	Setting up the Profile Options for the Wireless User
Yes	Setting up Default Organization and Subinventory
Optional	Setting Profile Options for Task Summary Display, Date Format
Optional	Setting up the System for Route Directions
Optional	Setting up the Email Server Profile Option
Optional	Setting up the Spares Management Order Parts Profile Option

Required	Step Title
Yes	Set up Master Service to Point to Field Service for AS (9.0.4)

## Setting up the User with Wireless Responsibility

Use this procedure to assign wireless responsibility to the applications user. The profile options for the Oracle Wireless Solution for Service user are set up once per user.

### Prerequisites

- ☐ The user must be created in the database before you can assign Oracle Wireless Solution for Service responsibility.

#### Steps:

1. Log in to the Oracle Applications with system administrator responsibility.
2. Navigate to Security > User > Define.
3. Enter a valid username, which is already in the database.
4. On the Responsibilities tab, enter the following new responsibility: Field Service Wireless User, JTF Default User Responsibility., Field Service Representative Responsibility.
5. Choose File > Save.

## Setting up the Profile Options for the Mobile Field Service Wireless User

Use this procedure to assign profile options to the Mobile Field Service wireless applications user.

### Prerequisites

- ☐ The user must be created in the database, and must have Oracle Wireless Solution for Service and Field Service Wireless responsibility.

#### Steps:

1. Log in to the Oracle applications with Functional administrator responsibility.

2. Navigate to Functional administrator > Core Services > Profiles.
3. Enter the profile **Name** , in the search area. For wild card searches, use '%'. Provide the access level details and choose Go.
4. Enter values for the profile options shown in this section. You can set these options in any sequence.

#### **Options**

Option	Description
JTFW_PROFILE_DEFAULT_WIRELESS_RESPONSIBILITY	Set at the User level. The default wireless responsibility is the wireless responsibility with which the user is logged in.  By default, this profile is set to 22730, the wireless responsibility.
CSFW: Use Icons for buttons	Image icons or buttons appear, based on the value of this profile option. If this profile is set to Yes, icons are present in the application. If this profile is set to No, buttons are present in the application.

## Setting up Default Organization and Subinventory

You must set up the default organization and subinventory for the resources that will be using the Wireless Option for Service.

### Prerequisites

- ☐ The user must be created and must have Field Service Wireless, and Field Service Representative responsibility.

#### **Steps:**

1. Log in to the Oracle applications with system Field Service Dispatcher responsibility.
2. Navigate to Spares > Setup > Resource Address and sub inventories. The screen appears with the list of sub inventories assigned to the resource.
3. Make any of the assigned sub-inventories to be the default IN sub inventory.
4. Save the settings.



## Setting Profile Options for Task Summary Display, Date Format

The profile options for the Task Summary Display Screen, and Date Format are set up at the system level but they can be overridden at user level.

Use this procedure to optionally set up the profile options for the task summary display screen, date format.

### Prerequisites

- ☐ The user must be created in the database, and must have Oracle Wireless Solution for Service responsibility.

### Steps:

1. Log in to the Oracle applications with system administrator responsibility.
2. Navigate to Profile > System.  
The Find System Profile Values screen appears.
3. In the Profile field, enter: CSFW% and choose Find.
4. Enter values for the profile options shown in this section. You can set these options in any sequence.

### *Options*

Option	Description

---

CSFW: DATE FORMAT	<p>Stores the date format mask. This option can be set at the site level but can be overwritten by the user. Valid date formats are:</p> <ul style="list-style-type: none"><li>• DD/MM/YYYY</li><li>• DD-MM-YYYY</li><li>• MM/DD/YYYY</li><li>• MM-DD-YYYY</li><li>• YYYY/MM/DD</li><li>• YYYY-MM-DD</li><li>• DD/MM/YY</li><li>• DD-MM-YY</li><li>• MM/DD/YY</li><li>• MM-DD-YY</li><li>• YY/MM/DD</li><li>• YY-MM-DD</li></ul>
CSFW: TASK DISPLAY1	<p>This profile is used together with CSFW: TASK DISPLAY2 and CSFW: TASK DISPLAY3 to display any three values on the Task Summary screen. The options chosen here determine what the field service engineers see when they start the Oracle Wireless Solution for Service application. The options to choose from are:</p> <ul style="list-style-type: none"><li>• TASK NUMBER</li><li>• SCHEDULE START TIME</li><li>• CUSTOMER ADDRESS</li><li>• STATUS</li><li>• TASK TYPE</li></ul>

---

---

CSFW: TASK DISPLAY2	<p>This profile is used together with CSFW: TASK DISPLAY1 and CSFW: TASK DISPLAY3 to display any three values on the Task Summary screen. The options chosen here determine what the field service engineers see when they start the Oracle Wireless Solution for Service application. The options to choose from are:</p> <ul style="list-style-type: none"><li>• TASK NUMBER</li><li>• SCHEDULE START TIME</li><li>• CUSTOMER ADDRESS</li><li>• STATUS</li><li>• TASK TYPE</li></ul>
CSFW: TASK DISPLAY3	<p>This profile is used together with CSFW: TASK DISPLAY1 and CSFW: TASK DISPLAY2 to display any three values on the Task Summary screen. The options chosen here determine what the field service engineers see when they start the Oracle Wireless Solution for Service application. The options to choose from are:</p> <ul style="list-style-type: none"><li>• TASK NUMBER</li><li>• SCHEDULE START TIME</li><li>• CUSTOMER ADDRESS</li><li>• STATUS</li><li>• TASK TYPE</li></ul>
CSFW: Default Distance Unit	<p>This is the distance unit for measurement purposes in Wireless. Available values are:</p> <ul style="list-style-type: none"><li>• Mile</li><li>• Kilometer</li></ul>

---

---

CSFW: Home Page	This profile option applies to the PDA application. For WML application home page always remains as the Main Menu and for the voice application the home page always remains Today's Task Page. However, for PDA application, the user does have an option to pick from Main Menu, Today's Task, or Open Tasks as the default Home Page.
CSFW: Audio Path	This profile option is used only for Voice application. This is a site level profile option, which tells the URL where the audio files are located. For example if the csfwTaskNumber_en_US.wav file is accessible through HTTP protocols at <a href="http://ap103jvm.us.oracle.com:13351/OA_MEDIA/csfwTaskNumber_en_US.wav">http://ap103jvm.us.oracle.com:13351/OA_MEDIA/csfwTaskNumber_en_US.wav</a> , this profile option would be <a href="http://ap103jvm.us.oracle.com:13351/OA_MEDIA">http://ap103jvm.us.oracle.com:13351/OA_MEDIA</a>
CSFW: Task Max	This is a numeric value that determines that maximum number of tasks to display on a screen.
CSFW: Planned Task Window	Follow-up Task functionality requires the entry of Planned Start Date and Planned End Date. The Planned Start Date defaults to system time. This profile determines the Planned End Date. When the profile is not set, the Planned End Date does not default. The profile can be set in number of days. For example, if current date and time are 11-27-2004 (MM-DD-YYYY) and 10:00, and the profile is set to 2.25, the Planned End Date and Time will default to 11-29-2004, 16:00.
CSFW: Service History Days	This profile determines how far back the Service History of an item belonging to a service request should be shown.
CSFW: Voice Expense Activity Code	If this profile is set, the selected expense activity code is used for all Voice Expense Debrief lines.
CSFW: Voice Expense Item	If this profile is set, the selected expense item is used for all Voice Expense Debrief lines.
CSFW: Voice Labor Activity Code	If this profile is set, the selected labor activity code is used for all Voice Labor Debrief lines.

---

## Setting up the System for Route Directions

The route directions are set up only once for the system.

Use this procedure to set up the profile options so that the Oracle Wireless Solution for Service user can access route directions.

### Steps:

1. Perform the following steps to copy the file csfwTextRouter.jsp:
  - The file is located at OA\_HTML directory.
  - Copy the file csfwTextRouter.jsp to the following location:
    - ORACLE\_HOME/j2ee/OC4J\_Wireless/applications/location/location-web
2. Set the "CSFW: Router Location" profile option to:
  - WIRELESS\_SERVER/location
3. Set "CSFW: Return Location" profile option to the Oracle Enterprise Application server where all the jsp files reside (OA\_HTML\_URL).

**Note:** If the protocols are not supplied, then the system assumes that it is http. If you are using https protocols, then also use the protocols in step 2 and 3.

4. Bounce the Apache server that points to ASwe.

The following table summarizes the implementation of driving directions:

Task	IAS Release 10g (9.0.4)
Copy the file from	\$OA_HTML
Copy the file to	\$ORACLE_HOME/j2ee/OC4J_Wireless/applications/location/location-web

Task	IAS Release 10g (9.0.4)
After copying the files can be viewed at	http:// WIRELESS_SERVER:port/location/csfwTextRouter.jsp
CSFW: Router Location	Protocol:/ WIRELESS_SERVER:port/location
CSFW: Return Location	OA_HTML_URL

## Setting up the Email Server Profile Option

The Email server is set up only once for the system.

Use this procedure to set up the profile option for the Email server.

### Steps:

1. Log in to the Oracle applications with the system administrator responsibility.
2. Navigate to Profile > System.  
The Find System Profile Values screen appears.
3. In the Profile field, enter: JTFW% and choose Find.
4. Enter values for the profile option shown in this section.

### Option

Option	Description
JTFW: SMTP SERVER	Set this profile option to your SMTP server.

5. Save your work.

## Setting up the Spares Management Order Parts Profile Option

If you plan to use the Spares Management order parts functionality you must set the following profile option: CSP: Order Type.

Use this procedure to set up the profile option:

**Steps:**

1. Log in to the Oracle applications with the system administrator responsibility.
2. Navigate to Profile > System.  
The Find System Profile Values screen appears.
3. In the Profile field, enter: CSP% and choose Find.
4. Enter values for the profile option shown in this section.

**Option**

Option	Description
CSP: Order Type	This profile option is used to provide a default value for order type when creating internal orders. Choose from any valid order type in the list of values.

5. Save your work.

## Set up Master Service to Point to Field Service for AS (9.0.4)

The following procedure enables you to set up the master service to point to the Oracle Wireless Solution for Service.

**Steps:**

1. All users should register themselves in the Application Server, or you can create a common user for the all the users.

**Note:** Note that while using the common users the voice functionality will not work, as the voice URL does need the username and password for Oracle Applications to be provided at the URL.

2. Login to the Web Tool at [http://WIRELESS\\_SERVER:httpPort/webtool/login.uix](http://WIRELESS_SERVER:httpPort/webtool/login.uix) with username, orcladmin.
3. Click on Services and then click Create Application and make the following selections:

- Select MultiChannel Application (the default), and click Create
  - Enter the Name as "Field Service Wireless"
  - For small and medium devices, set the URL to:  
http://ENTERPRISE\_SERVER:port/OA\_HTML/csfwlgnm.jsp.
  - For a voice device, provide the username and password of the user in the URL in the following configuration:  
http://ENTERPRISE\_SERVER:port/OA\_HTML/csfwvoice.jsp?username=xxx&password=yyy
  - Click Finish
4. Select the Content tab and then click Add Application Link and make the following selections:
    - Click Master
    - Select "Field Service Wireless," which was created in step three
    - In the Content App field, type "Field Service Wireless"
    - Click Finish
  5. Click the Content tab again, choose Access Control Content and make the following selections:
    - Select the user for which you want the application to have access
    - Select Guests if you want it to appear on the wireless portal (recommended). Click Assign application
    - Select application "Field Service Wireless" and Add to Group
    - Click Finish.

## Task Scheduling and Assignment

Technicians can self-schedule and self-assign new tasks and new follow-up tasks, created from their wireless PDA devices. You can also select a plan option from the Windows to Promise options for scheduling the new tasks and new follow-up tasks, created from wireless PDA devices. You can choose to work right away on an additional new task created on the same service request, or on a new task on a new service request. You can choose the *Self Schedule* or *Windows to Promise* options to



schedule the new task for a later time, due to constraints, such as calendar availability or if you don't have the required skills or parts to perform the job right away.

Navigate to the Profiles page to set the necessary profile options (Functional administrator > Core Services > Profiles). The table below lists the necessary profile options to set for this functionality. Below the table, these same profile options are detailed.

**Important:** Oracle Field Service must be implemented for this functionality.

**Key Profile Options for Task Scheduling and Assignment**

Profile Option	User	System Admin: USER	System Admin: RESP	System Admin: APP	System Admin: SITE	Required?	Default
CSF: Default Working Task Status	View Update	View Update	View Update	View Update	View Update	Y	Working
CSFW: Task Max	View Update	View Update	View Update	View Update	View Update	Y	-
CSF: Default Planned task status for planned task	View Update	View Update	View Update	View Update	View Update	Y	Planned
CSFW: Technicians Schedulable Options	View Update	View Update	View Update	View Update	View Update	Y	Window to Promise

Profile Option	User	System Admin: USER	System Admin: RESP	System Admin: APP	System Admin: SITE	Required?	Default
CSF: Default commit task status	View Update	View Update	View Update	View Update	View Update	Y	Assigned

### CSF: Default commit task status

Technicians can self-schedule and self-assign new tasks and new follow-up tasks, from their wireless PDA devices. When the task is scheduled, the task assignment status depends on the value of this profile. The default value for this profile is *Assigned*.

### CSF: Default Planned task status for planned task

Technicians can schedule new tasks and new follow-up tasks, using the windows options available when utilizing the Windows to Promise mode, from their wireless PDA devices. When the task is scheduled, the task assignment status depends on the value of this profile. This profile's default value is *Planning*.

### CSF: Default Working Task Status

If you choose to work right away on the additional task created on the same service request or on a new task on a new service request, the task assignment status depends on the value of this profile. The default for this profile is set to *Working*.

**Note:** Advanced Scheduler is not required for this option.

### CSFW: Task Max

Technicians can self schedule and self assign tasks and follow-up tasks, using the *Self Schedule* option or schedule the tasks and follow-up tasks using *Windows to Promise* options, from their wireless PDA devices. You can select a slot from the plan options that are displayed. The Plan options appear, based on the value of this profile. The plan options appear in an ascending order, from lowest to highest cost.

### CSFW: Technicians Schedulable Options

Technicians can self schedule and self assign tasks and follow-up tasks, work on the tasks and follow-up tasks right away, or schedule the task and follow-up task using the *Windows to Promise* option, from their wireless PDA devices. Your access level in the

wireless device, depends on the value of this profile.

- *No scheduling Permission:* When the profile is set with this value, the technician does not have any scheduling and assignment options.
- *Work on it:* When the profile is set with this value, the technician can assign the task to themselves and work on it. No scheduling is required.
- *Self Schedule:* When the profile is set with this value, the technician has the following options:
  1. Self assign the task and work on it
  2. Schedule the task by selecting a suitable plan option from the list of various plan options, and assign the task to himself

**Note:** Advanced Scheduler must be implemented for this selection.

- *Window to Promise:* This is the default value. When the profile is set with this value, the technician has the following options:
  1. Self assign the task and work on it
  2. Schedule the task by selecting a suitable plan option from the list of various plan options, and assign the task to himself
  3. Use the Windows To Promise mode to schedule and assign the task to the best possible resource

**Note:** Advanced Scheduler must be implemented for this selection.

## Related Topics

Self-Assign or Self-Schedule Tasks, *Oracle Mobile Field Service User Guide*

## Verifying the Implementation

To verify a successful implementation of the Wireless Option for Service you should perform several tasks. Tasks covered in this section include:

- Verify User Login
- Verify Task Detail Information Card
- Verify Directions

## Verify User Login

When you have installed the Oracle Wireless Solution for Service, you can verify the user login as follows:

1. Type in the URL for the Portal to Go Server (Oracle AS Wireless Server) and click on the Field Service URL Adapter Service.
2. Type in the applications login and password and verify that you can see the menu.

## Verify Task Detail Information Card

To verify the task detail information card, perform these steps:

1. Create a service request using the Field Service Core Application and assign a task to a Field Service wireless user for today.
2. Log in to the Wireless application and check whether the task is properly assigned to the wireless user.
3. Click on Today's Task and verify the display of the summary screen in accordance with the profile setting for TASK DISPLAY.
4. Click on Customer Information and verify that you can send an e-mail, assuming that an SMTP server is available.

## Verify Directions

If Directions are implemented, you can verify that the function works correctly as follows:

1. Log in to the Applications and click on Direction.
2. Click on Other and type in a starting and ending address that you know are correct.
3. Verify the Directions text.

## Additional Information to Maintain the Wireless Option

The following table contains information useful in the maintenance and use of the Oracle Wireless Option for Service.

This section also details the following procedures:

- Setting up Signature Control
- Setting up Optional Voice Files (.wav)

Features	ASwe - Release 10g (Version 9.0.4)
Creating Users	The users register them selves in: <a href="http://WIRELESS_SERVER:httpPort/studio/home.jsp">http:// WIRELESS_SERVER:httpPort/studio/home.jsp</a>
Creating Services	The users must login to the studio and create their own applications where he is supposed to type in the URL. In case the administrator wants to use the Service designer for some reason, it would be available at <a href="http://WIRELESS_SERVER:7778/webtools/login.uix">http://WIRELESS_SERVER:7778/webtools/login.uix</a> , where 7778 is the middle tier apache port (Non-ssl). The login would be orcladmin or anything that was used at the time of the installation and the password.
Login through Wireless Device	The users should login to: <a href="http://WIRELESS_SERVER:httpPort/location/rm">http://WIRELESS_SERVER:httpPort/location/rm</a> .
Starting and stopping the Middle tier	Please log into Enterprise Manager at <a href="http://WIRELESS_SERVER:1810">http://WIRELESS_SERVER:1810</a> . Click on the Middle tier stand-alone instance. Startall would start all and stop all would stop all would stop everything. Please note that the same thing can be achieved by going to \$ORACLE_HOME/opmn/bin directory and using the following commands: opmnctl startall and opmnctl stopall.
Viewing Log File	Log into Enterprise Manager at <a href="http://WIRELESS_SERVER:1810">http://WIRELESS_SERVER:1810</a> . Click on the Middle tier and stand-alone instance. Click on Wireless. Click on Log File to see details of error when user encounters "Service Error" on the device. The log file is also available at <a href="#">ORACLE_HOME/wireless/log/log.xml</a> .

## Setting up Signature Control

In order to use the Oracle Wireless Option for Service signature control functionality, you must use one of the following two wireless devices along with the appropriate system requirements:

Device	System Requirements	Plug-in Required
Plug-in Required	Symbol Spectrum 24R WebClient for Palm Computing Platform	No

Pocket PC-based devices	Pocket PC, Pocket PC2000, Pocket PC 2002, Pocket PC 2003 and 4.0 .Net based devices	Yes
-------------------------	---	-----

On devices with built-in signature capabilities (Symbol Spectrum24R WebClient for Palm Computing Platform), the Wireless Solution for Service automatically generates the appropriate markup language.

In the case of PocketPC devices running WinCE .0 or later (Pocket PC, Pocket PC2000, Pocket PC 2002, Pocket PC 2003 and 4.0 .Net based devices), a signature capture plug-in is available for download at: <http://otn.oracle.com/tech/wireless/mobilebrowser.htm>

If you are using signature capture with either of the devices supported by Oracle, you must set the CSFW: Enable Signature Control profile option to 'yes.'

## Setting up Optional Voice Files (.wav)

The voice application works with the Text-To-Speech (TTS) server. So all the data from the Enterprise database is read out using the TTS server. However, better quality of the voice application can be done using the voice wav files for the static prompts and messages.

The default wav files are shipped for language code en (English) and territory code (US). So the file naming convention is filename\_en\_US.wav (e.g., csfwTaskNumber\_en\_US.wav). The language code and the territory code are taken from the Enterprise database for the user. So if the user has different territory code or language code then the TTS server would be used instead of the wav files since the files are not shipped. However, these files in the different language can be recorded and copied to the same location where the \_en\_US files are, then the wav files are picked at the execution time. For a user, language code is mandatory and the territory code is not. So if the territory code is not there in the database, then the file name becomes filename\_TERRITORYCODE.wav (e.g., csfwTaskNumber\_en.wav).

---

## Material Debrief Input Using Voice

### Input Material Debrief Using Voice

A technician can access and update the material debrief at a customer site. Using a combination of phone and voice, technicians can capture material details that are installed and returned in the task.

### Key Profile Options

#### *Key Profile Options*

Profile Option	User	System Admin:	System Admin:	System Admin:	System Admin:	Required?	Default
		USER	RESP	APP	SITE		
CSFW: Voice Install Service Activity Code	View	View	View	View	View	Y	-
	Update	Update	Update	Update	Update		
CSFW: Voice Return Service Activity Code	View	View	View	View	View	Y	-
	Update	Update	Update	Update	Update		

Profile Option	User	System Admin: USER	System Admin: RESP	System Admin: APP	System Admin: SITE	Required?	Default
Csfw: Voice Item Type	View Update	View Update	View Update	View Update	View Update	N	-
Csfw: Voice Parent Product Type	View Update	View Update	View Update	View Update	View Update	N	-
Csfw: Voice Recovered Product Type	View Update	View Update	View Update	View Update	View Update	N	-
Csfw: Voice Serial Number Type	View Update	View Update	View Update	View Update	View Update	N	-

### CSFW: Voice Install Service Activity Code

The value of this profile is the service activity code in the material install section. All valid service activity codes are available for selection.

### Csfw: Voice Item Type

This profile setting determines the type of Voice item. When this profile is populated, you are directed to the mode; you are not prompted to select a mode. You can select one of the following profile values:

- *Alpha Digit*: The Item type has both alphabets and digits.
- *Digits*: The Item type has only digits.
- *Choose*: You can choose an Item type of alpha or digits.



### **Csfw: Voice Parent Product Type**

This profile setting determines the type of Voice Parent Product. When this profile is populated, you are directed to the mode; you are not prompted to select a mode. You can select one of the following profile values:

- *Alpha Digit:* The product type has both alphabets and digits.
- *Digits:* The product type has only digits.
- *Choose:* You can choose a product type of alpha or digits.

### **Csfw: Voice Recovered Product Type**

This profile setting determines the type of Voice Recovered Product. When this profile is populated, you are directed to the mode; you are not prompted to select a mode. You can select one of the following profile values:

- *Alpha Digit:* The Recovered product type has both alphabets and digits.
- *Digits:* The Recovered product type has only digits.
- *Choose:* You can choose a Recovered product type of alpha or digits.

### **CSFW: Voice Return Service Activity Code**

The value of this profile is the service activity code in the material return section. All valid service activity codes are available for selection.

### **Csfw: Voice Serial Number Type**

This profile setting determines the type of Voice Serial Number. When this profile is populated, you are directed to the mode; you are not prompted to select a mode. You can select one of the following profile values:

- *Alpha Digit:* The Serial Number type has both alphabets and digits.
- *Digits:* The Serial Number type has only digits.
- *Choose:* You can choose a Serial Number type of alpha or digits.



---

## Diagnostic Testing

This chapter covers the following topics:

- Overview
- Diagnostic Testing Oracle Mobile Application Foundation
- Diagnostic Testing Oracle Mobile Field Service
- Configuring Debug Logging
- Common Issues

### Overview

Diagnostic testing can be done for the Oracle Mobile Application Foundation and the Oracle Mobile Field Service applications. This chapter describes how to run these diagnostics. After your initial implementation, you should run the entire set of pre-seeded diagnostic tests to verify that the implementation has been successful. Subsequently, the tests can be run whenever a problem arises.

### Diagnostic Testing Oracle Mobile Application Foundation

Please refer to the Oracle Applications CRM System Administrator's Guide or the online help for the CRM System Administrator Console for instructions on how to use the Oracle Diagnostics for Applications user interface.

#### Running Pre-seeded Tests:

Use the following procedure to run the pre-seeded Oracle Mobile Application Foundation diagnostic tests:

##### Steps

1. Log in as a system administrator to the CRM System Administrator Console.

2. Click the Diagnostics tab.
3. Choose **CRM Gateway for Mobile Services** from the Application drop-down list.
4. Click **Advanced**.
5. You can run any of the following pre-seeded tests.

The following table lists diagnostic tests, their descriptions, and associated symptoms and resolutions.

Test	Description	Symptom	Resolution
Oracle Lite Setup	Checks if the Oracle9i Lite version installed is correct. Checks if the database access permissions for the Oracle9i Lite schema are set properly	An error occurs while applying mobile application patches.	Review the diagnostic report and schedule or install/apply the correct Oracle9i Lite patches.
Mobile Concurrent Program Setup	Checks if all the mobile concurrent programs are working.	Changes from the mobile client are not applied to the enterprise system.  Users are not able to synchronize. They might get invalid username/password errors.  Many mobile application concurrent programs are not working.	Review the diagnostic report and schedule or run the concurrent program to apply changes.
Mobile User Hook Registration	Checks if mobile applications register vertical user hooks properly and the execute flag is set to run.	Changes on JTF Notes, CS Counter, or CSI Item Instance on the enterprise do not synchronize to the mobile device.	Reapply the JTM patch to register and set up the execute flag to run.

Test	Description	Symptom	Resolution
Mobile Framework Setup	This test verifies the Configuration Setup for the mobile framework.	Application publishes incorrectly or synchronization fails.	Change the scripts and republish the application.
Mobile Application Upgrade History	This report shows the status of mobile application upgrades.	Upgrades fail.	Republish the application.
User Summary	This test shows the User Status Summary.	Users are not created properly.	Look at the test results and rerun the MANAGES MOBILE USER concurrent program.
User Detail	This test provides detailed information about a specified mobile user.	Need to investigate user history.	View user history and take appropriate action.

## Diagnostic Testing Oracle Mobile Field Service

Run diagnostic tests to ensure that the install and operation of the Oracle Mobile Field Service application are correct.

### Steps:

Complete the following steps to access the diagnostic screens of the Forms application:

1. Log in to the CRM System Administrator Console as a system administrator.
2. Click the Diagnostics tab.
3. Depending on your mobile computer device, choose either **Oracle Field Service/Palm** or **Oracle Field Service/Laptop** from the Application drop-down list.

**Note:** The Oracle Field Service/Palm responsibility is used for the Oracle Mobile Field Service/Pocket PC application.

The Diagnostics application displays the Test Summary table and a table showing any failures in the past week.

4. Click the Advanced tab.

In the Advanced tab, enter the parameters for the test that you want to run. From the Basic tab, you can run all non-parameter tests for the application.

Refer to the Oracle Applications CRM System Administrator's Guide or the online help system to learn how to use the Diagnostics Framework user interface.

The client-side tests run automatically on the mobile computer device when you open an Oracle Mobile Field Service application. You can also run these tests any time to verify the correct setup of the Oracle Mobile Field Service application.

The following table lists diagnostic tests, test descriptions, observed symptoms, and proposed resolutions for Oracle Mobile Field Service/Laptop:

Test for Oracle Mobile Field Service/Laptop	Location	Problem	Resolution
JTM Master Concurrent Program	Backend	Are the concurrent programs running?	Provides detailed diagnostic information about the JTM Master Concurrent Program. If necessary, it tells system administrators which settings should be modified.
Environment Setup	Backend	Is the environment correct?	Provides support for debugging the configuration of Oracle9i Lite. It allows the administrator to check if the recommended settings are followed correctly. It also helps in identifying common issues with external authentication, installation manager, profile option values, etc.

The following table lists diagnostic tests, test descriptions, observed symptoms, and

proposed resolutions for Oracle Mobile Field Service/Pocket PC:

<b>Test for Oracle Mobile Field Service/Pocket PC</b>	<b>Location</b>	<b>Problem</b>	<b>Resolution</b>
Responsibility	Backend	User may not have proper responsibility.	Assign proper responsibilities.
Profile values	Backend	Profile values for Field Service Palm are not set.	Set profile values.
User Hooks Registration	Backend	Hooks registration is not done.	Contact your Oracle technical support representative.
Check Concurrent Program	Backend	All required concurrent programs might not be running.	Make sure that the concurrent programs are running.
JTM Concurrent Program registration	Backend	For JTM Concurrent Program APIs are not registered.	Contact your Oracle technical support representative.
JTM Master Concurrent Program	Backend	Are the concurrent programs running?	Provides detailed diagnostic information about the JTM Master Concurrent Program. If necessary, it tells system administrators which settings should be modified.

<b>Test for Oracle Mobile Field Service/Pocket PC</b>	<b>Location</b>	<b>Problem</b>	<b>Resolution</b>
Environment Setup	Backend	Is the environment correct?	Provides support for debugging the configuration of Oracle9i Lite. It allows the administrator to check if the recommended settings are followed correctly. It also helps in identifying common issues with external authentication, installation manager, profile option values, etc.
Task diagnostic	Backend	Task is assigned incorrectly.	Assign task correctly.
Check required list of values	Backend	List of values are empty.	Create all list of values.

## Configuring Debug Logging

This section describes how to configure debug logging for troubleshooting problems with mobile operations.

Oracle Mobile Field Service applications use the CRM Technical Foundation logging framework to log messages to a central repository that is shared by both the database and the middle tier servers. Each log message belongs to one of the following severities:

- Statement
- Procedure
- Event
- Exception
- Error



- Unexpected

UI screens give system administrators convenient and simple controls for configuring and viewing the logs. Refer to the *Oracle Applications CRM System Administrator's Guide* or the online help for the CRM System Administrator Console to learn how to use the logging screens.

### Steps:

Complete the following steps to configure logging for all modules:

1. Log in to the CRM System Administrator Console as a system administrator.
2. Navigate to Setting > System > Debug Logging > Configuration.
3. Set the following values:
  - Enabled = ON
  - Level = Statement
  - Repository = Database
  - Module filter = include string csm%, asg%, jtm%
4. Click **Update** to save the values.
5. Bounce Apache (the middle-tier server).

**Note:** Turn the logger off after you finish troubleshooting. This changes the values of the above fields back to their original values. Logging at this level of detail consumes resources and could impact the performance of your system.

In addition to these logs, you can use the Oracle9i Lite mobile server logging facility to troubleshoot problems with user synchronizations. Refer to the *Oracle9i Lite Mobile Server Administration Guide, Release 5.0.2* for more details.

## Common Issues

This section describes the most common issues encountered in the implementation of Oracle Mobile Field Service.

### Viewing Items Stocked in a Subinventory:

#### Problem

Trackable items that have been stocked in a subinventory are now displayed in the

inventory list of the application.

**Resolution**

This may be a replication issue. Please check that the installed base instances have been created for the stocked items in the back of the database. If the instances do exist but the items still do not display on the laptop, please contact Oracle Support.

---

## Administrative Tasks

This chapter covers the following topics:

- Overview
- Setting the Conflict Resolution Rule
- Configuring the Interapplication Bar
- Manually Creating Mobile Users
- Managing Concurrent Programs
- Viewing User Synchronization Statistics
- Working With Upload Errors
- Managing Deferred Upload Errors
- Managing Discarded Upload Errors
- Managing Passed Upload Errors
- Using the Oracle9i Lite Administration Screens

### Overview

This chapter describes how to perform the following administrative tasks for the Oracle Mobile Application Foundation:

- Setting the Conflict Resolution Rule
- Configuring the Interapplication Bar
- Manually Creating Mobile Users
- Viewing User Synchronization Statistics
  - Viewing Synchronization Summary Tables on the Home Page

- Viewing Synchronization Details on the Synch Detail Page
- Viewing Synchronization Summary Reports
- Viewing Engineer Synchronization Details
- Viewing Load Distribution
- Working With Upload Errors
  - Understanding Upload Errors
  - Purging Upload Errors
  - Viewing the Upload Errors Summary
- Managing Deferred Upload Errors
  - Working With the Deferred Upload Errors of a Particular User Synchronization Session
  - Editing the Details of Deferred Upload Errors
- Managing Discarded Upload Errors
- Managing Passed Upload Errors
- Using the Oracle9i Lite Administration Screens

**Note:** There is a mobile administrator responsibility that is similar to the system administrator responsibility. Any user who has been granted the mobile administrator responsibility can perform administrative activities for the Oracle Mobile Application Foundation. You must log in as a user with this responsibility to access the Mobile Foundation Administration Console, which is where the relevant administration screens are located.

## Setting the Conflict Resolution Rule

The profile option, JTM: Application Conflict Rule, specifies the conflict resolution rule that is used in case of updates to the same entity by both the enterprise system and the Oracle Mobile Field Service application.

This profile option determines how the Oracle Mobile Field Service application makes updates to the database. The following are the possible types of updates:

- *Client wins.* Changes made by the mobile user are always applied to the enterprise database. No timestamp checking is done.
- *Server wins.* Changes made by the mobile user are applied to the enterprise database if the record has not been modified since the mobile user last synchronized. If the record has been modified in the meanwhile, then the mobile user's change is not applied.

## Configuring the Interapplication Bar

You can set up the Interapplication Bar to conveniently navigate between the CRM System Administrator Console and the Mobile Application Foundation Administration Console. This is an optional procedure. Performing this setup will allow administrators to easily navigate from the Mobile Application Foundation Administration Console to the CRM System Administrator Console in order to run diagnostic tests and check error logs.

To navigate between the CRM System Administrator Console and the Mobile Application Foundation Administration Console, you will need to create a user who has both mobile administrator ("MobileAdmin") and system administrator ("CRM HTML administration") responsibilities. Log in as that user to the CRM System Administrator Console and set up the Interapplication Bar with the two applications being "CRM Gateway for Mobile Services" and "CRM HTML administration".

Refer to the *Oracle Applications CRM System Administrator's Guide* or the online help for the CRM System Administrator Console for instructions on how to successfully set up the Interapplication Bar.

## Manually Creating Mobile Users

The Oracle Mobile Application Foundation allocates resources for mobile users when they are assigned a responsibility that is associated with a mobile application (such as the responsibility "Field Service/Laptop"). The concurrent program MANAGES MOBILE USERS runs periodically and creates or removes these mobile user resources based on the assigned responsibilities. A user who recently has been assigned a mobile responsibility will not be able to synchronize until after this concurrent program runs. The user cannot change his or her password on the mobile client, and will need to do so online.

During system testing, it may be helpful to create users more rapidly. In this case, you can manually run the MANAGES MOBILE USERS concurrent program using the Concurrent Manager.

The home page of the Mobile Application Foundation Console displays the number of users who do not have the correct mobile subscriptions. In order to view the error messages associated with the mobile user subscription failures, run the diagnostic tests described in "Diagnostic Testing Oracle Mobile Application Foundation", page 7-1.

## Managing Concurrent Programs

The JTM master concurrent program runs all concurrent jobs registered by Oracle Mobile Field Service applications. The JTM master concurrent program uses the following category types:

- TRANSACTION
- LOOKUP
- INVENTORY
- PURGE

For a complete description of these category types, see "Scheduling Concurrent Programs for MAF", page 3-11.

The Mobile Concurrent Program Summary page displays the JTM concurrent program details for all the concurrent programs related to Oracle Mobile Field Service. The mobile concurrent program shows how many times the program has currently ran, and the maximum and the minimum times taken to finish the program.

The concurrent program screens allow you to view the status of mobile logic (PL/SQL) modules, which process the various business events for the Oracle Mobile Field Service applications. The mobile logic modules are grouped in various categories and the frequency of their execution is based on the category. You can change the mobile logic modules from one category to another or add a new category and hence change the frequency of execution, based on the business requirements. These screens can also be used to understand the resources used by mobile logic modules, identify and resolve any performance bottlenecks.

### Steps:

Complete the following to view the log history:

- Click **View** to see the log history.

The log view displays the log details of the program from the first run of the program. The log view describes the status of the concurrent program in each run.

CRM Gateway for Mobile Devices

[Home](#)
[Upload Errors](#)
[Concurrent Programs](#)
[Setup](#)

[Program Summary](#)
[Program Detail](#)
[Query Summary](#)
[Category Definition](#)

### Mobile Concurrent Program Log History

Category:   
Status:   
Message: Like   
Query ID:

Last Start Date:   
Last End Date:

Query: `SELECT DISTINCT bpt.BUSINESS_PROCESS_ID, bpt.TRANSACTION_TYPE_ID, bpt.LAST_UPDATE_DATE FROM CS_BUSINESS_PROCESSES bpr, CS_BUS_PROCESS_TXNS bpt WHERE bpr.BUSINESS_PROCESS_ID = bpt.BUSINESS_PROCESS_ID AND bpr.FIELD_SERVICE_FLAG = 'Y'`  
Statement: `bpr, CS_BUS_PROCESS_TXNS bpt WHERE bpr.BUSINESS_PROCESS_ID = bpt.BUSINESS_PROCESS_ID AND bpr.FIELD_SERVICE_FLAG = 'Y'`

View

### Mobile Concurrent Program Log History

Last Start Date	Last End Date	Elapsed Time	Status	Category	Message
29-MAR-2004 19:49:28	29-MAR-2004 19:49:28	00:00:01	Lookup		Successfully processing with query id 2
28-MAR-2004 21:58:53	28-MAR-2004 21:58:53	00:00:01	Lookup		Successfully processing with query id 2
28-MAR-2004 21:35:10	28-MAR-2004 21:35:10	00:00:01	Lookup		Successfully processing with query id 2
28-MAR-2004 21:51:37	28-MAR-2004 21:51:37	00:00:01	Lookup		Successfully processing with query id 2
28-MAR-2004 21:46:08	28-MAR-2004 21:46:08	00:00:01	Lookup		Successfully processing with query id 2
28-MAR-2004 22:13:54	28-MAR-2004 22:13:54	00:00:01	Lookup		Successfully processing with query id 2
29-MAR-2004 19:27:44	29-MAR-2004 19:27:44	00:00:01	Lookup		Successfully processing with query id 2
28-MAR-2004 22:19:56	28-MAR-2004 22:19:56	00:00:01	Lookup		Successfully processing with query id 2
29-MAR-2004 19:36:42	29-MAR-2004 19:36:42	00:00:01	Lookup		Successfully processing with query id 2
28-MAR-2004 21:40:40	28-MAR-2004 21:40:41	00:00:01	Lookup		Successfully processing with query id 2

[First](#)
[Previous](#)
1 - 10 of 12
[Next](#)
[Last](#)

## Mobile Concurrent Query Summary:

The following graphic contains the details for a specific query. This information appears in table format, providing such details as the query statement, description and last start and end dates.

ORACLE

CRM Gateway for Mobile Devices

[Home](#)
[Upload Errors](#)
[Concurrent Programs](#)
[Setup](#)

[Program Summary](#)
[Program Detail](#)
[Query Summary](#)
[Category Definition](#)

### Mobile Concurrent Query Summary

Query ID:   
Last Start Date:   
Last End Date:   
Description: Like

Access Table:   
Status:   
Enabled:   
Query Statement: Like

View

### Mobile Concurrent Program Details

Select	Query ID	Query Statement	Description	Last Start Date	Last End Date	Elapsed Time	Status	Enabled	Access Table	Log History
<input type="checkbox"/>	2	SELECT DISTINCT bpt.BUSINESS_PROCESS_ID, bpt.TRANSACTION_TYPE_ID, bpt.LAST_UPDATE_DATE FROM CS_BUSINESS_PROCESSES bpr, CS_BUS_PROCESS_TXNS bpt WHERE bpr.BUSINESS_PROCESS_ID = bpt.BUSINESS_PROCESS_ID AND bpr.FIELD_SERVICE_FLAG = 'Y'	This concu...	29-MAR-2004 19:49:28	29-MAR-2004 19:49:28	00:00:01	Fine	Yes(Original)	JTM_CS_BUS_PROCESS_TXNS_ACC	<a href="#">View</a>
<input type="checkbox"/>	3	select * from cs_transaction_types_b	This concu...	29-MAR-2004 19:49:28	29-MAR-2004 19:49:28	00:00:01	Fine	Yes(Original)	JTM_CS_TRANSACTION_TYPES_ACC	<a href="#">View</a>

The following graphic shows the definition of each category. The categories are defined in a table by such information as category type, description, and start and end active date.

You can move queries from one category to another or create your own category and then seed queries in them.

**ORACLE<sup>®</sup>**  
**CRM Gateway for Mobile Devices**

Home Upload Errors Concurrent Programs Setup Profile Sign Out

Program Summary Program Detail Query Summary **Category Definition**

### Mobile Category Summary

Add

Category	Meaning	Description	Enabled	Start Active Date	End Active Date
TXC	Transaction	Transaction	Y		
INV	Inventory	Inventory	Y		
LOOKUP	Lookup	lookup	Y		
PURGE	Purge	purge	Y		
<u>YA_TEST_CATEGORY</u>	Yazhang test category	this is a new created test category from yazhang	Y		
<u>YA_NEW</u>	YA_NEW	ya new category	Y	11-MAR-2003	11-MAR-2004

Home | Upload Errors | **Concurrent Programs** | Setup | Profile | Sign Out

### Mobile Concurrent Program Details:

The Mobile Concurrent Program Details page shows the details for each of the concurrent programs. Using this page, you can re-assign a concurrent program to another category. For example, you can re-assign a concurrent program from LOOKUP to TRANSACTION by making a selection from a drop-down list. You can also enable and disable concurrent programs by specifying YES or NO from a drop-down list. These changes can be done even in runtime and will be effective from the next run of the concurrent program.



**ORACLE**  
CRM Gateway for Mobile Devices

Home Upload Errors Concurrent Programs Setup

Program Summary Program Detail Query Summary Category Definition

### Mobile Concurrent Program Details

Procedure Name:   
 Last Start Date:   
 Last End Date:   
 Description: Like

Category:   
 Status:   
 Enabled:   
 Message: Like

### Mobile Concurrent Program Details

Select	Procedure Name	Description	Last Start Date	Last End Date	Elapsed Time	Status	Category	Enabled
<input type="checkbox"/>	CSL_JTF_TASK_REFS_ACC_PKG.CON_REQUEST_TASK_REFERENCES	<a href="#">This concu...</a>	28-MAR-2004 22:20:31	28-MAR-2004 22:20:31	00:00:01	FINE	Transaction(Original)	Yes(Original)
<input type="checkbox"/>	CSL_CONC_NOTIFICATION_PKG.RUN_CONCURRENT_NOTIFICATIONS	<a href="#">This concu...</a>	28-MAR-2004 22:20:31	28-MAR-2004 22:20:31	00:00:01	FINE	Transaction(Original)	Yes(Original)
<input type="checkbox"/>	CSM_BUS_PROCESS_TXNS_EVENT_PKG.REFRESH_ACC		29-MAR-2004 19:51:18	29-MAR-2004 19:51:18	00:00:01	Fine	Lookup	Yes

## Viewing User Synchronization Statistics

This section covers the following tasks:

- Viewing Synchronization Summary Tables on the Home Page, page 8-7
- Viewing Synchronization Details on the Synch Detail Page, page 8-8
- Viewing Synchronization Summary Reports, page 8-10
- Viewing Engineer Synchronization Details, page 8-11
- Viewing Load Distribution, page 8-13

## Viewing Synchronization Summary Tables on the Home Page

The home page of the Mobile Application Foundation Administration Console provides the following features:

- The **Critical Errors** table:

This table displays a summary of critical synchronization and upload errors. You can click the links provided to display detailed error reports.

- The **Synch Metrics** table:

This table displays a summary of synchronization metrics: You can view the number of synchronizations that occurred on the current date, the average time per

synchronization, and the maximum synchronization time.

To navigate to the home page of the Mobile Application Foundation Administration Console, log in at the JTF login page as a user associated with the mobile administrator ("mobileadmin") responsibility. The home page will automatically display the two tables as described above.

### Screenshot

An image of the Mobile Application Foundation Administration Console home page is provided below:

Critical Errors					Edit
User Creation Failures	Today's User Synch Errors	Total Synch Errors	Today's Deferred Upload Errors	Total Deferred Upload Errors	
0	10	56	15	82	

Synch Metrics			Edit
Today's Synched Users	Average Synch Time (s)	Maximum Synch Time (s)	
19	24	626	

## Viewing Synchronization Details on the Synch Detail Page

Use this procedure to view details about the synchronizations of particular user sessions.

### Steps

1. In the Mobile Application Foundation Administration Console, from the Home tab, click the Synch Details subtab.

On the Synch Detail Page, the synchronization details for each user session is displayed.

2. Review the data provided, which includes user name, the time of the synchronization, the data set size of the last synchronization, if any exceptions occurred during the synchronization, and how many upload errors have occurred for that particular user.

You can click the hyper link in the **Deferred Transactions Count** column to view the details of the upload errors.

3. If desired, you can filter what data appears on this page. At the top of the page you

can search by user name, synchronization time, and whether there was an exception in the synchronization.

You can search by one or more of these parameters. To do so, enter values as desired into the fields, then click **View** to perform the search.

### Screenshot

An image of the Synch Detail page is provided below:

The screenshot shows the 'Synch Detail Page' with a navigation bar containing 'Introduction', 'Synch Details' (selected), and 'Synch Reports'. A 'Home' link is in the top right. Below the navigation bar, the page title 'Synch Detail Page' is displayed. Search filters include 'User Name' (text input), 'Sync Exception' (dropdown), 'Sync Start Date' (calendar icon), and 'Sync End Date' (calendar icon). A 'View' button is located below the filters. Below the filters is the 'Sync Summary' section, which contains a table with the following data:

User Name	Sync Start Date	Sync End Date	Sync Duration	Data Set Size	Sync Exception	Upload Errors	Error Detail
CSL_UPGRADE_002	12-NOV-2003 02:57:06	12-NOV-2003 02:57:09	00:00:03	3159	N	0	
CSL_UPGRADE_002	12-NOV-2003 02:54:41	12-NOV-2003 02:54:42	00:00:01	2759	N	0	
CSL_UPGRADE_002	12-NOV-2003 02:50:43	12-NOV-2003 02:50:46	00:00:03	2854	N	0	
CSL_UPGRADE_002	12-NOV-2003 02:45:46	12-NOV-2003 02:46:28	00:00:42	3377	N	0	
CSL_UPGRADE_002	12-NOV-2003 01:55:32	12-NOV-2003 01:55:53	00:00:21	117654	N	0	
CSM_UPGRADE_002	12-NOV-2003 05:01:36	12-NOV-2003 05:01:43	00:00:07	2940	N	0	
CSM_UPGRADE_002	12-NOV-2003 05:00:43	12-NOV-2003 05:00:57	00:00:14	11428	N	0	
CSM_UPGRADE_002	12-NOV-2003 04:53:50	12-NOV-2003 04:53:53	00:00:03	1242	N	0	
CSM_UPGRADE_002	12-NOV-2003 04:36:34	12-NOV-2003 04:36:38	00:00:04	1242	N	0	
CSM_UPGRADE_002	12-NOV-2003 04:35:19	12-NOV-2003 04:35:24	00:00:05	1242	N	0	

At the bottom right of the table, there is a pagination control: 'First Previous 1 - 10 of 210 Next Last'.

There is also a daily synchronizations report, which you can access from the Synch Reports subtab. It offers a searchable table that lists how many synchronization attempts and failures have occurred during specified hours on a given date. It also gives metrics on the average and maximum synchronization times, upload data sizes, and download data sizes. You can filter the table by date and device type, as well as specify the range of hours (Start Time and End Time) displayed. A screenshot of this report follows:

Introduction

Sync Details

Sync Reports

Sync Summary Report (Daily)

Date

12-NOV-2003

Start Time

18:00

Device Type

All

End Time

22:00

View

Hour	Sync Attempt	Sync Failures		Sync Time		Upload Data		Download Data	
		No	%	Avg	Max	Avg	Max	Avg	Max
18:00 - 19:00	19	2	11	19	182	1057.526	2339	52191.947	318661
19:00 - 20:00	3	1	33	2	3	1490.666	2250	1627.666	2802
20:00 - 21:00	15	2	13	10	73	994.133	2267	51405.866	327877
21:00 - 22:00	11	1	9	10	28	1315.363	2410	17401.272	101537
Total	48	6							
Avg			13	13		1123.874		40813.166	

## Viewing Synchronization Summary Reports

For each hour of the day, the following report summarizes the synchronization for the entire system. Use this report to view the overall synchronizing pattern of the day.

ORACLE<sup>®</sup>

CRM Gateway for Mobile Devices

Home

Upload Errors

Concurrent Programs

Introduction

Sync Details

Sync Reports

Sync Summary Report (Daily)

Sync Summary Report (Weekly)

Engineer Sync Summary Report (Weekly)

Engineer Sync Detail (Weekly)

Load Distribution (Weekly)

Sync Summary Report (Daily)

Date

30-MAR-2004

Start Time

00:00

Device Type

All

End Time

24:00

View

Hour	Sync Attempt	Sync Failures		Sync Time		Upload Data		Download Data	
		No	%	Avg	Max	Avg	Max	Avg	Max
0 - 1	0	0	0	0	0	0.0	0	0.0	0
1 - 2	0	0	0	0	0	0.0	0	0.0	0
2 - 3	0	0	0	0	0	0.0	0	0.0	0
3 - 4	0	0	0	0	0	0.0	0	0.0	0
4 - 5	0	0	0	0	0	0.0	0	0.0	0
5 - 6	3	0	0	29	77	1790.333	2012	281498.666	842821
6 - 7	0	0	0	0	0	0.0	0	0.0	0
7 - 8	0	0	0	0	0	0.0	0	0.0	0

The following report shows the summary of the synchronization for the entire system for each week on daily basis. Use this report to view the overall synchronizing pattern of the week.


**ORACLE**  
**CRM Gateway for Mobile Devices**

[Home](#)
[Upload Errors](#)
[Concurrent Programs](#)

[Introduction](#)
[Synch Details](#)
[Synch Reports](#)

[Sync Summary Report \(Daily\)](#)  
[Sync Summary Report \(Weekly\)](#)  
[Engineer Sync Summary Report \(Weekly\)](#)  
[Engineer Sync Detail \(Weekly\)](#)  
[Load Distribution \(Weekly\)](#)

### Sync Summary Report (Weekly)

Week **28-MAR-2004 to 03-APR-2004**   [View](#)

Day	Sync Attempt	Sync Failures		Sync Time		Upload Data		Download Data	
		No	%	Avg	Max	Avg	Max	Avg	Max
Sunday	32	0	0	74	969	1932.0	9419	622958.0	6311775
Monday	11	0	0	36	327	2189.0	6010	584834.0	6184297
Tuesday	3	0	0	29	77	1790.0	2012	281499.0	842821
Wednesday	0	0	0	0	0	0.0	0	0.0	0
Thursday	0	0	0	0	0	0.0	0	0.0	0
Friday	0	0	0	0	0	0.0	0	0.0	0
Saturday	0	0	0	0	0	0.0	0	0.0	0
Total	46	0							
Avg			0	62		1984.195		591572.326	

## Viewing Engineer Synchronization Details

The following report summarizes the synchronizations for all engineer for each week. Use this report to compare the different synchronizing activities for each engineer.

**ORACLE**  
**CRM Gateway for Mobile Devices**

[Home](#)
[Upload Errors](#)
[Concurrent Programs](#)

[Introduction](#)
[Synch Details](#)
[Synch Reports](#)

[Sync Summary Report \(Daily\)](#)  
[Sync Summary Report \(Weekly\)](#)  
**Engineer Sync Summary Report (Weekly)**  
[Engineer Sync Detail \(Weekly\)](#)  
[Load Distribution \(Weekly\)](#)

### Engineer Sync Summary Report (Weekly)

Week **28-MAR-2004 to 03-APR-2004**  [View](#)

Engineer	Sync Attempt	Sync Failures		Sync Time		Upload Data		Download Data	
		No	%	Avg	Max	Avg	Max	Avg	Max
CSL_USER1	19	0	0	61	969	1953	3592	413818	6311775
IWILSON	12	0	0	17	181	2070	9419	41272	488507
QACSL001	8	0	0	105	786	1984	5067	827918	6033561
QACSL002	2	0	0	148	293	783	1477	3017762	6034740
SWESOLIN	5	0	0	72	327	2376	6010	1239130	6184297
Total	46	0							
Avg			0	62		1984.021		591572.26	

The following report shows the details of all the synchronizations for an engineer for each week. Use this report to view the detailed statistics of all the synchronizations done by the engineer.

**ORACLE**  
**CRM Gateway for Mobile Devices**

[Home](#)
[Upload Errors](#)
[Concurrent Progr](#)

[Introduction](#)
[Synch Details](#)
[Synch Reports](#)

[Sync Summary Report \(Daily\)](#)  
[Sync Summary Report \(Weekly\)](#)  
[Engineer Sync Summary Report \(Weekly\)](#)  
**Engineer Sync Detail (Weekly)**  
[Load Distribution \(Weekly\)](#)

### Engineer Sync Details (Weekly)

Engineer

Week **28-MAR-2004 to 03-APR-2004**  [View](#)

Sync	Sync Status	Sync Start	Sync End	Sync Time	Upload Data	Download Data
------	-------------	------------	----------	-----------	-------------	---------------

## Viewing Load Distribution

The following report shows the load distribution for each hour over a span of days. This report helps you in traffic modelling and estimation of the load on the system.

ORACLE

CRM Gateway for Mobile Devices

[Home](#)
[Upload Errors](#)
[Concurrent Programs](#)

[Introduction](#)
[Synch Details](#)
[Synch Reports](#)

[Sync Summary Report \(Daily\)](#)
[Sync Summary Report \(Weekly\)](#)
[Engineer Sync Summary Report \(Weekly\)](#)
[Engineer Sync Detail \(Weekly\)](#)
[Load Distribution \(Weekly\)](#)

Load Distribution

Week

28-MAR-2004 to 03-APR-2004

30-MAR-2004

Day	Hour 1	Hour 2	Hour 3	Hour 4	Hour 5	Hour 6	Hour 7	Hour 8	Hour 9	Hour 10	Hour 11	Hour 12	Hour 13	Hour 14	Hour 15
Sunday	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Monday	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Tuesday	0	0	0	0	0	3	0	0	0	0	0	0	0	0	0
Wednesday	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Thursday	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Friday	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Saturday	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Total	1	0	0	0	0	3	0	0	0	0	0	0	0	0	0

## Working With Upload Errors

This section covers the following tasks:

- Understanding Upload Errors, page 8-14
- Purging Upload Errors, page 8-15
- Viewing the Upload Errors Summary, page 8-15

## Understanding Upload Errors

During upload, some of the data that is synchronized might not be applied to the enterprise database.

The following situations might cause upload errors:

- **System Issues:** System issues might cause upload errors if the system is on a different mobile patch level than what is required. Administrators should verify the correct patch levels if this situation is suspected.
- **Setup Issues:** Setup issues might cause upload errors if the correct business process type or profile setting is not set on the enterprise system. For example, in an expense line, it is necessary that the expense type is set correctly. If the expense type is set as "lunch" on the enterprise system while on the mobile device the expense line is set as "dinner," then this issue might cause an upload error.



- **Faulty Data or Data Conflicts:** Faulty data or data conflicts can also cause upload errors. For example, multiple people attempting to update the same record can cause data conflicts where the server and the client go out of sync.

The Mobile Application Foundation maintains a log of all errors that occur during the upload process. In the Upload Error pages, you can view and reapply these errors. In the case of a system or setup issue, you only need to fix the system or setup issue and then reapply the error. In the case of faulty data or data conflicts, you need to modify the data and then apply the error.

You can change data or system elements as needed and then reapply errors to the enterprise database. If they are successful, then you can delete them from the error tables. If they continue to fail, then you can choose to either modify them once more and try again, or to discard the failed errors and delete them from the error tables.

The Mobile Application Foundation logs every user synchronization session that has errors during upload, as well as the actual errors. For example, a user synchronization session could consist of uploading two service requests and three debrief lines. In this session, suppose two of the debrief lines failed to be applied to the enterprise system. This session would have two upload errors. You can choose to discard one or both of these errors. However, when you reapply even one of the errors, all the errors in the user session will be reapplied. Therefore, it is recommended that you make changes to all the errors in a synchronization session before reapplying the session.

Depending on how they are handled by the administrator, upload errors can be classified as follows:

- **Deferred:** These transactions did not go through to the main database tables. Either they have never been reapplied, or they have been reapplied multiple times and always failed.
- **Passed:** These transactions have been successfully reapplied. Only transactions that originally failed and later were successfully reapplied are shown here. Passed upload errors can be purged (permanently deleted) from the system by an administrator.
- **Discarded:** These are transactions that you want to remove from the system because reapplying them has never been successful. Discarded upload errors are analogous to files that are in the "Recycle Bin" or the "Trash." Discarded upload errors can be purged (permanently deleted) from the system by an administrator.

## Purging Upload Errors

Administrators should periodically purge all stored upload errors, because the table in the enterprise system which holds them will grow infinitely large unless its contents are occasionally removed.

## Viewing the Upload Errors Summary

Use this procedure to view the upload errors summary.

### Steps

1. In the Mobile Application Foundation Administration Console, navigate to the Upload Errors tab.
2. The Introduction page provides summary information for deferred, discarded, and passed upload errors. To view further information about the errors, click the appropriate **Detail** button.

Alternatively, you can click a subtab to navigate to the respective detail page for that error type.

### Screenshot

An image of the Upload ErrorsIntroduction page is provided below:

[Home](#)[Upload Errors](#)[Setup](#)

[Introduction](#)[Deferred](#)[Discarded](#)[Passed](#)

## Introduction

The upload error screens allow the user to view and reapply upload errors.

These errors can occur during upward sync. You can view, edit and reapply any deferred upload errors. Passed upload errors are errors that have been reapplied successfully. They can be purged. Discarded are those upload errors that fail repeatedly and can be purged.

To access online help,click the Help button at the top right corner.

Upload Errors	Sessions	Total Errors	Detail
Deferred	43	67	<a href="#">Detail</a>
Discarded	17	19	<a href="#">Detail</a>
Passed	0	0	<a href="#">Detail</a>
Total Errors		86	

## Managing Deferred Upload Errors

Upload errors are generated during the upload process when some of the data fails to be applied to the enterprise database. Upload errors can be caused by the following:

- System issues

It is possible that the system is on a different mobile patch level than what is required.

- Setup issues

The correct business process type or the correct profile setting is not set on the enterprise system. For example, it is necessary that the expense type for an expense line is set correctly.

- Faulty data or conflicts

Oracle Mobile Application Foundation maintains a log of all upload errors. You can use the Mobile Application Foundation Administration Console to view and manage these errors.

Deferred upload errors are transactions that did not go through to the main database tables. Either they have never been reapplied, or they have been reapplied multiple times and always failed.

### Steps:

Complete the following steps to manage deferred upload errors:

1. In the Mobile Application Foundation Administration Console, choose the Upload Errors tab and then the Deferred subtab to navigate to the main Deferred Upload Errors page.
2. If desired, you can search for errors by one or more of the provided parameters: user name, synchronization date, publication name, publication item name, or the name of the wrapper that failed. The default result set displays all user synchronization sessions that failed. To perform a search, enter values into the appropriate fields, then click **View**. You can use the percent sign (%) as a wildcard character.
3. Review the Deferred Upload Errors Summary table, which shows a summary of user synchronization session errors. The table contains the following columns:
  - **User Name:** The name of the mobile user whose data had errors.
  - **Synch ID:** The ID of the synchronization session.
  - **Last Apply Date:** The date and time at which the user last synchronized the data.
  - **Error Count:** The number of errors that have occurred.
  - **Times Applied:** This displays the number of times the transaction was reapplied unsuccessfully, after it was deferred. For a new upload error, the value is "1."
  - **Select:** In this column you can select a check box to work with a particular error (you can reapply it, discard it, or view its details).
4. To view further details about a particular user synchronization session, click the **Details** button located in that row in the table.
5. To discard errors, select the appropriate check box(es), then click the **Discard** button.
6. To reapply errors, select the appropriate check box(es), then click the **Reapply** button.

### Screenshot

An image of the main Deferred Upload Errors page is provided below:

[Home](#) [Upload Errors](#) [Setup](#)

[Introduction](#) [Deferred](#) [Discarded](#) [Passed](#)

Deferred Upload Definition

User Name:

Synch Date:

Publication Item Name:

Wrapper Name:

View

Deferred Upload Summary

User Name	Synch ID	Last Apply Date	Error Count	Times Applied	Select	Detail
RSREDDY	403	28-FEB-2003 02:18:10	2	1	<input type="checkbox"/>	<a href="#">Detail</a>
RSREDDY	401	28-FEB-2003 02:13:08	1	1	<input type="checkbox"/>	<a href="#">Detail</a>
RSREDDY	400	28-FEB-2003 02:13:07	1	1	<input type="checkbox"/>	<a href="#">Detail</a>
RSREDDY	395	28-FEB-2003 01:32:56	1	1	<input type="checkbox"/>	<a href="#">Detail</a>
RSREDDY	393	28-FEB-2003 01:17:33	1	1	<input type="checkbox"/>	<a href="#">Detail</a>
RSREDDY	391	28-FEB-2003 01:02:38	1	1	<input type="checkbox"/>	<a href="#">Detail</a>
RSREDDY	389	28-FEB-2003 00:55:03	1	1	<input type="checkbox"/>	<a href="#">Detail</a>
RSREDDY	386	27-FEB-2003 23:54:36	1	1	<input type="checkbox"/>	<a href="#">Detail</a>
RSREDDY	382	27-FEB-2003 23:29:20	1	1	<input type="checkbox"/>	<a href="#">Detail</a>
RSREDDY	379	27-FEB-2003 23:14:10	1	1	<input type="checkbox"/>	<a href="#">Detail</a>

First Previous 1 - 10 of 43 Next Last

Discard

Reapply

Select All

Clear All

### Working with the Deferred Upload Errors of a Particular User Synchronization Session:

Use this procedure to work with the deferred upload errors of a particular user synchronization session.

#### Steps

1. To reach the Deferred Upload Errors Detailpage, follow this navigation path in the Mobile Application Foundation Administration Console:
  1. Go to the Upload Errors tab.
  2. Go to theDeferred subtab.

3. Click a **Detail** button.

This page displays information about the user synchronization session and the errors that occurred in that session. The error information displayed includes the following:

4. **Sequence Number:** A synchronization session includes all the records updated by the mobile user. The sequence number indicates the order of this record among the records that were applied to the enterprise database.
5. **Publication Name:** Publication name refers to a group of mobile tables which comprise the data store for the mobile application in the mobile device. For example, SERVICEL refers to Oracle Mobile Field Service/Laptop, while SERVICEP refers to Oracle Mobile Field Service/Pocket PC. A mobile application is composed of Publications (data) and a mobile application (code).
6. **Publication Item Name:** Publication item names are the names of the mobile tables in Oracle Mobile Field Service/Laptop or in Oracle Mobile Field Service/Pocket PC. A publication item is part of a publication.
7. **Wrapper Name:** The wrapper name is the name of the PL/SQL packaged procedure which is responsible for applying the client changes to the enterprise database.
8. **Last Apply Date:** The date when the error was last applied.
9. **Error Description**

2. To discard one or more errors, select the appropriate check box(es) in the table and then click **Discard**.
3. To reapply the errors, click **Reapply All**. All the errors in this particular synchronization session will be reapplied.
4. To access the page where you can view and edit the details of a particular error, click the appropriate **Detail** button.

### Screenshot

An image of the Deferred Upload Errors Detailpage is provided below:

Home
Upload Errors
Setup

Introduction
Deferred
Discarded
Passed

Deferred Upload Definition Detail

**User Name:** RSREDDY      **Synch ID:** 403  
**Last Apply Date:** 28-FEB-2003 02:18:10      **Times Applied:** 1  
**Error Count:** 2

Sequence #	Publication Name	Publication Item Name	Wrapper Name	Last Apply Date	Error Description	Select	Detail
1	SERVICEP	CSM_INCIDENTS_ALL	CSM_SERVICEP_WRAPPER_PKG	28-FEB-2003 02:18:10	UPWARD SYNC CONFLICT: CLIENT LOST: CSM_SERVICE_REQUESTS_PKG.APPLY_UPDATE: Incident_Id = 40158	<input type="checkbox"/>	<a href="#">Detail</a>
3	SERVICEP	CSM_TASKS	CSM_SERVICEP_WRAPPER_PKG	28-FEB-2003 02:18:10	Error Msg: Update not processed because record contains stale data.	<input type="checkbox"/>	<a href="#">Detail</a>

[Reapply All](#)
[Discard](#)
[Return](#)

## Editing the Details of Deferred Upload Errors:

Use this procedure to edit the details of a particular deferred upload error.

### Steps

- To reach the page where you can edit the details of deferred upload errors, follow this navigation path in the Mobile Application Foundation Administration Console:
  - Go to the Upload Errors tab.
  - Go to the Deferred subtab.
  - Click a **Detail** button in the table, opening the Deferred Upload Errors Detail page.
  - On that page, click a **Detail** button in the table.
- The Deferred Upload Errors Edit Page displays details about a particular deferred upload error. On this page, you can do one of the following:
  - Discard this error: Click **Discard**.
  - Change the values of this error: If faulty values are causing the upload error, you can edit values as desired in the fields provided, and then click **Save** to apply changes.
  - Do nothing and return to the Deferred Upload Errors Detail page: Click **Return**.

### Screenshot




An image of the Deferred Upload Errors Edit Page is provided below:

[Home](#)
[Upload Errors](#)
[Setup](#)

[Introduction](#)
[Deferred](#)
[Discarded](#)
[Passed](#)

Upload Edit Page

**User Name** RSREDDY      **Publication Name** SERVICEP  
**Synch ID** 403      **Wrapper Name** CSM\_SERVICEP\_WRAPPER\_PKG  
**Sequence #** 3      **Publication Item Name** CSM\_TASKS  
**Last Apply Date** 28-FEB-2003 02:18:10      **Error Description** Error Msg: Update not processed because record contains stale data.

Column Name	Old Value	New Value
Created_by	1000195	<input type="text" value="1000195"/>
Task_id	20932	<input type="text" value="20932"/>
Task_number	21032	<input type="text" value="21032"/>
Task_name	TASK NI	<input type="text" value="TASK NI"/>
Task_type_id	10001	<input type="text" value="10001"/>
Task_status_id	14	<input type="text" value="14"/>
Task_priority_id	3	<input type="text" value="3"/>
Escalation_level		<input type="text"/>
Planned_start_date	27-FEB-2003 18:49:56	<input type="text" value="27-FEB-2003 18:49:56"/> 
Planned_end_date	27-FEB-2003 18:49:56	<input type="text" value="27-FEB-2003 18:49:56"/> 
Planned_effort	100	<input type="text" value="100"/>
Planned_effort_uom	MIN	<input type="text" value="MIN"/>
Created_date	28-FEB-2003 18:49:56	<input type="text" value="28-FEB-2003 18:49:56"/> 

## Managing Discarded Upload Errors

Discarded upload errors are transactions that you want to remove from the system. Reasons for discarding transactions include the following:

- Reapplying them has never been successful.
- The mobile user entered an incorrect value and wants to undo the transaction.
- The transaction has become old due to multiple failures and the user has created more recent transactions.

Discarded errors are analogous to files in the "Recycle Bin" or the "Trash." Use this procedure to manage discarded upload errors.



**Steps:**

1. In the Mobile Application Foundation Administration Console, choose the Upload Errors tab and then the Discarded subtab to navigate to the Discarded Upload Errors page.
2. If desired, you can search for errors by one or more of the provided parameters: user name, synchronization date, publication name, publication item name, or the name of the wrapper that failed. The default result set displays all user synchronization sessions that have been discarded. To perform a search, enter values into the appropriate fields and then click **View**. You can use the percent sign (%) as a wildcard character.
3. Review the Discarded Upload Errors Summary table, which lists discarded user synchronization session errors. The table contains the following columns:
  - **User Name:** The name of the mobile user whose data had errors.
  - **Synch ID:** The ID of the synchronization session.
  - **Last Apply Date:** The date and time at which the user last synchronized the data.
  - **Error Count:** The number of errors that have occurred.
  - **Times Applied:** This column displays the number of times the transaction was reapplied unsuccessfully, after it was deferred. For a new upload error, the value is "1."
  - **Select:** In this column, you can select which errors you want to purge.
4. To purge discarded errors, ensure that the errors that you want to purge are selected in the table. Alternatively, you can purge all errors by clicking **Select All** and then **Purge**.

**Note:** Purging will permanently delete the discarded errors from the system.

The following is an image of the Discarded Upload Errors page:

[Home](#)
[Upload Errors](#)
[Setup](#)

[Introduction](#)
[Deferred](#)
[Discarded](#)
[Passed](#)

Discarded Upload Definition

User Name:       Synch Date:

Publication Item Name:       Wrapper Name:

[View](#)

### Discarded Upload Summary

User Name	Synch ID	Last Apply Date	Error Count	Times Applied	Select
RSREDDY	241	12-FEB-2003	1	1	<input type="checkbox"/>
RSREDDY	226	12-FEB-2003	1	1	<input type="checkbox"/>
RSREDDY	224	12-FEB-2003	1	1	<input type="checkbox"/>
RSREDDY	208	12-FEB-2003	1	1	<input type="checkbox"/>
RSREDDY	206	12-FEB-2003	3	1	<input type="checkbox"/>
RSREDDY	205	12-FEB-2003	1	1	<input type="checkbox"/>
RSREDDY	203	12-FEB-2003	1	1	<input type="checkbox"/>
RSREDDY	202	12-FEB-2003	1	1	<input type="checkbox"/>
RSREDDY	135	10-FEB-2003	1	1	<input type="checkbox"/>
RSREDDY	134	10-FEB-2003	1	1	<input type="checkbox"/>

[First](#)
[Previous](#)

[Next](#)
[Last](#)

[Purge](#)
[Select All](#)
[Clear All](#)

## Managing Passed Upload Errors

Passed upload errors are transactions have been successfully reapplied. Please note that only transactions that originally failed and later were successfully reapplied are shown in the Upload Errors tab. Use this procedure to manage passed upload errors.

### Steps:

1. In the Mobile Application Foundation Administration Console, choose the Upload Errors tab and then the Passed subtab to navigate to the Passed Upload Errors page.
2. If desired, you can search for errors by one or more of the provided parameters: user name, synchronization date, publication name, publication item name, or the name of the wrapper that failed. The default result set displays all passed errors. To perform a search, enter values into the appropriate fields, then click **View**. You can use the percent sign (%) as a wildcard character.

3. Review the Passed Upload Errors Summary table, which lists passed user synchronization session errors. The table contains the following columns:
  - **User Name:** The name of the mobile user whose data had errors.
  - **Synch ID:** The ID of the synchronization session.
  - **Last Apply Date:** The date and time at which the user last synchronized the data.
  - **Error Count:** The number of errors that have occurred.
  - **Times Applied:** This column displays the number of times the transaction was re-applied unsuccessfully, after it was deferred. For a new upload error, the value is "1."
  - **Select:** In this column, you can select which errors you want to purge.
4. To purge passed errors, confirm that the errors you want to purge are checked off in the table. Alternatively, you can purge all errors by clicking **Select All** and then **Purge**.

**Note:** Purging will permanently delete the discarded errors from the system.

#### Screenshot

Home
Upload Errors
Setup

Introduction
Deferred
Discarded
**Passed**

Passed Upload Definition

User Name: %
Synch Date: %

Publication Item Name: %
Wrapper Name: %

View

Passed Upload Summary

User Name	Synch ID	Last Apply Date	Error Count	Times Applied	Select
First Previous Next Last					

Purge
Select All
Clear All

## Using the Oracle9i Lite Administration Screens

Oracle9i Lite provides an administrative console that can be accessed from the following URL:

`http://<mobile_server_IP_address>/webtogo`

The administrator can log into the mobile server console. The console can be used for the following tasks:

- Changing password for the mobile server repository
- Stopping or starting the mobile server, independent of the Apache listener
- Enabling or disabling trace options

Refer to the *Oracle9i Lite Mobile Server Administration Guide* for details.

**Note:** Whenever you change the mobile server repository password using this administration screen, you should also make sure to set the profile option `ASG_CONS_PASSWD` with the new password. Failure to do so will cause errors while applying Mobile Application patches.

---

## Installing Oracle Mobile Field Service

This appendix covers the following topics:

- Installing Oracle Mobile Field Service/Laptop
- Launching Oracle Mobile Field Service/Laptop
- Installing Oracle Mobile Field Service/Pocket PC
- Launching Oracle Mobile Field Service/Pocket PC
- Creating a Shortcut for Oracle Mobile Field Service/Pocket PC
- Subsequent Synchronizations for Oracle Mobile Field Service/Pocket PC

### Installing Oracle Mobile Field Service/Laptop

This appendix describes how to install Oracle Mobile Field Service/Laptop on a laptop computer and how install Oracle Mobile Field Service/Pocket PC on a Pocket PC. In both cases, this appendix also describes how to launch the application.

This section describes how to install the Web-to-Go server and Oracle9i Lite database, in addition to the Oracle Mobile Field Service application. This additional software is necessary for Oracle Mobile Field Service to operate.

For the minimum software and hardware requirements for the a laptop computer, see "Minimum Software Requirements", page 2-1 and "Minimum Hardware Requirements", page 2-2 .

#### Steps

Complete the following steps to install Oracle Mobile Field Service/Laptop on your laptop computer:

1. Open a Web browser window.
2. Open the following URL, where <Mobile Server> is the domain name or IP address of the mobile server:

`http://<Mobile Server>/setup`

For example: `http://130.35.88.214/setup`

3. Click the link to download the Mobile Client for Web-to-Gosetup program and save it.

If you are using Internet Explorer, right click with the mouse, choose the option **Save target as** and then click **OK**. Choose a location to save the setup program and then click **Save**.


4. From Windows Explorer, double-click the `setup.exe` file that you just downloaded.

Once started, the setup program prompts you to specify an install directory.

5. Choose an install directory.

For example, `C:\MOBILECLIENT` and then click **OK**. The setup program downloads all the required components.

Once the installation is complete, your browser launches and opens the Oracle9i Lite Workspace Logon page. This page contains fields where you specify your user name and password.

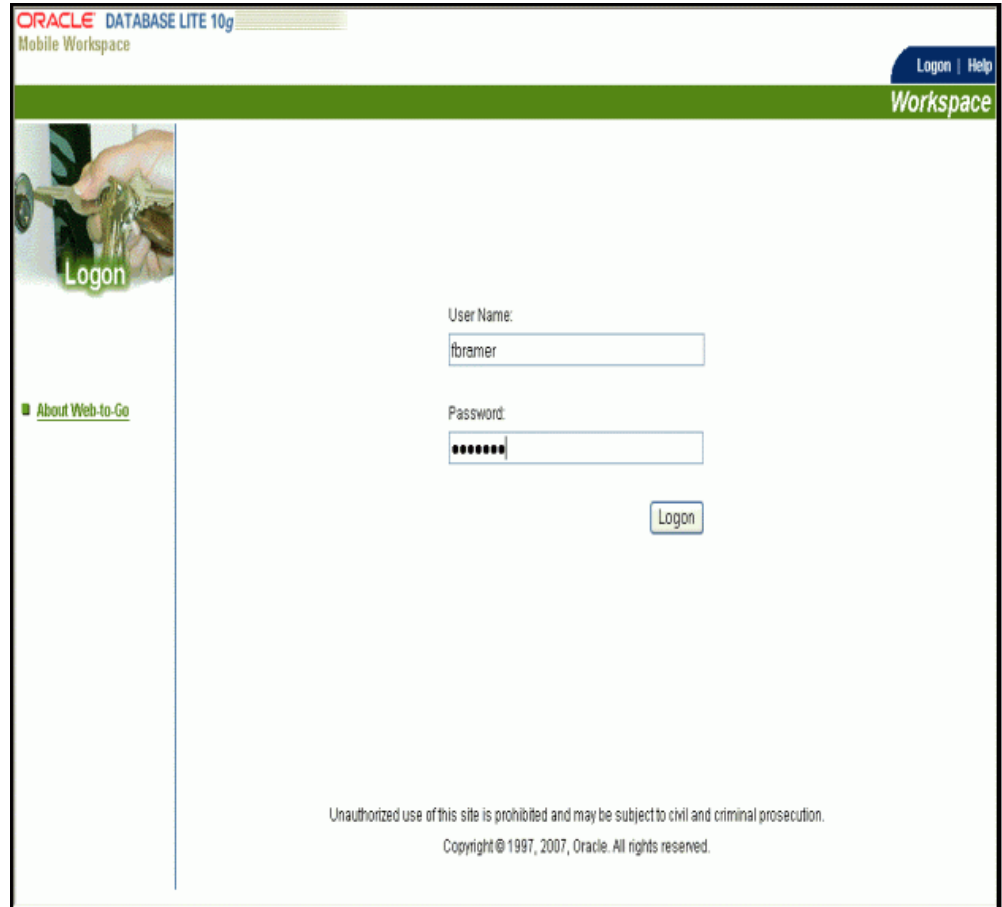

If the browser does not launch automatically, the setup program will display the Web-to-Go URL. For example, `http://my-laptop`. In this case, click the URL.

**Note:** You can always use the URL `http://localhost` to access the Web-to-Go server without having to know the name of the laptop computer.


6. After the browser launches, logon using the same user name and password that you use for online applications.

If the browser returns a "Page Not Found" error, check your proxy settings. In Microsoft Internet Explorer, ensure that the Bypass Proxy for Local Addresses check box is selected under **Tools > Internet Options > Connections > LAN Settings**. Reload the page and try again.

7. Click **Logon**.

The Oracle9i Lite Client Initialization page opens with initialization status for the files and records of Oracle Mobile Field Service/Laptop. This status includes the


amount of bytes downloaded onto your laptop computer.

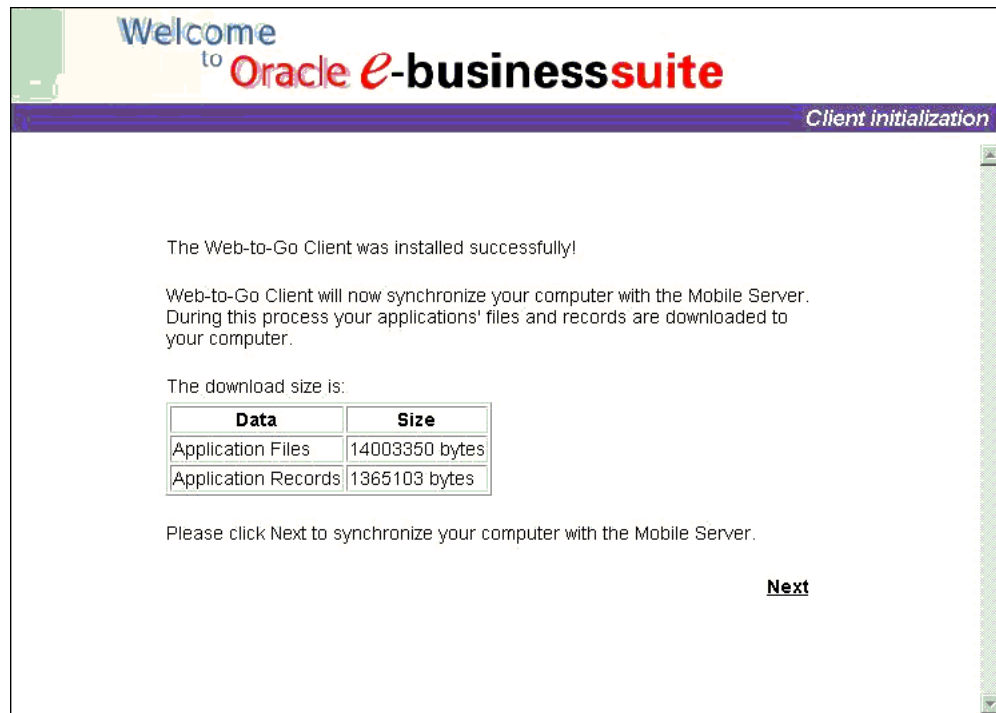


8. Click **Next**.

The Oracle9i Lite Client Synchronization page opens with the current synchronization process in bold, italic text. A percentage value is found near each synchronization process to indicate its status. The initial synchronization downloads the application and your initial set of data. The synchronization takes several minutes; therefore, do not exit the browser until the synchronization is complete.



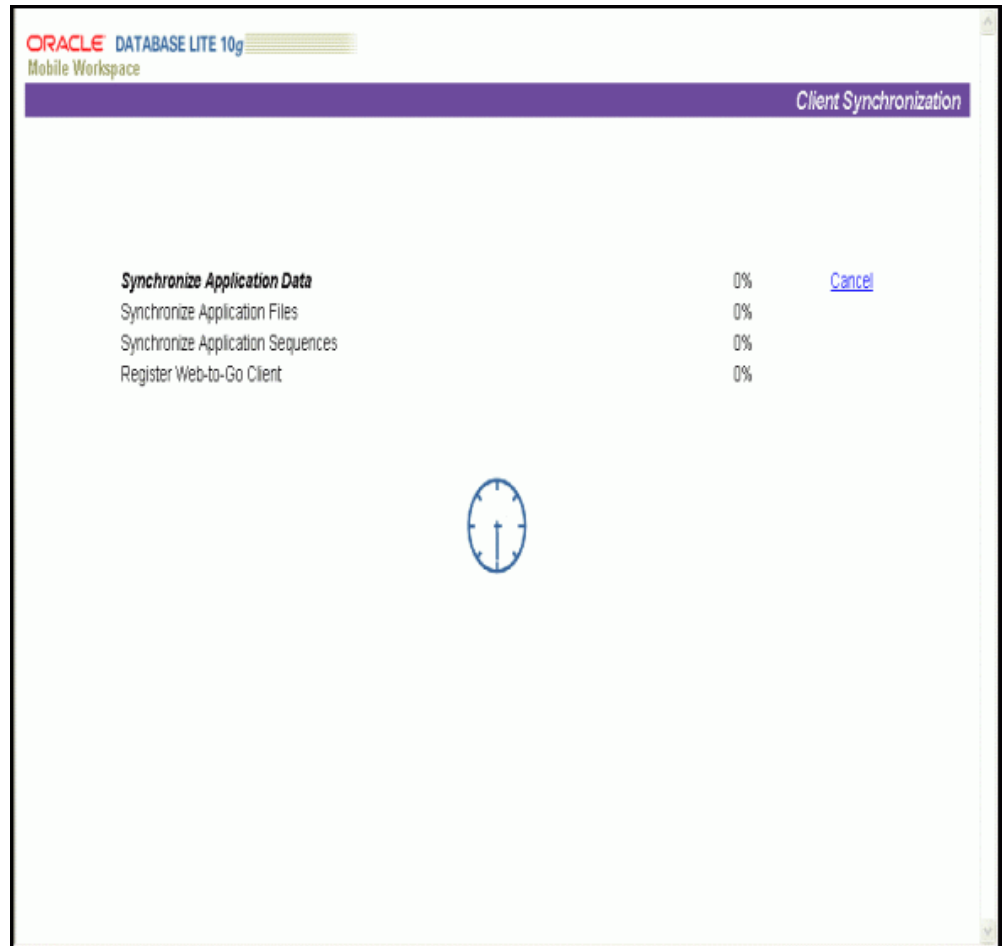


After synchronization completes, the browser displays the Oracle 10g Lite Workspace page.

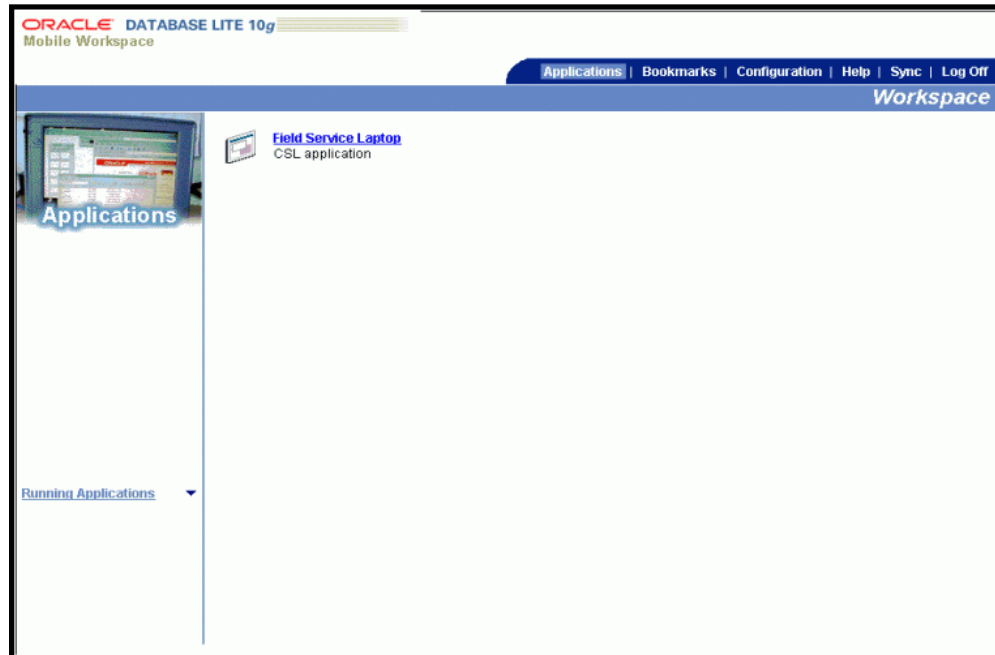

9. Click **Field Service Laptop**.

The Oracle Mobile Field Service/Laptop Calendar page opens.

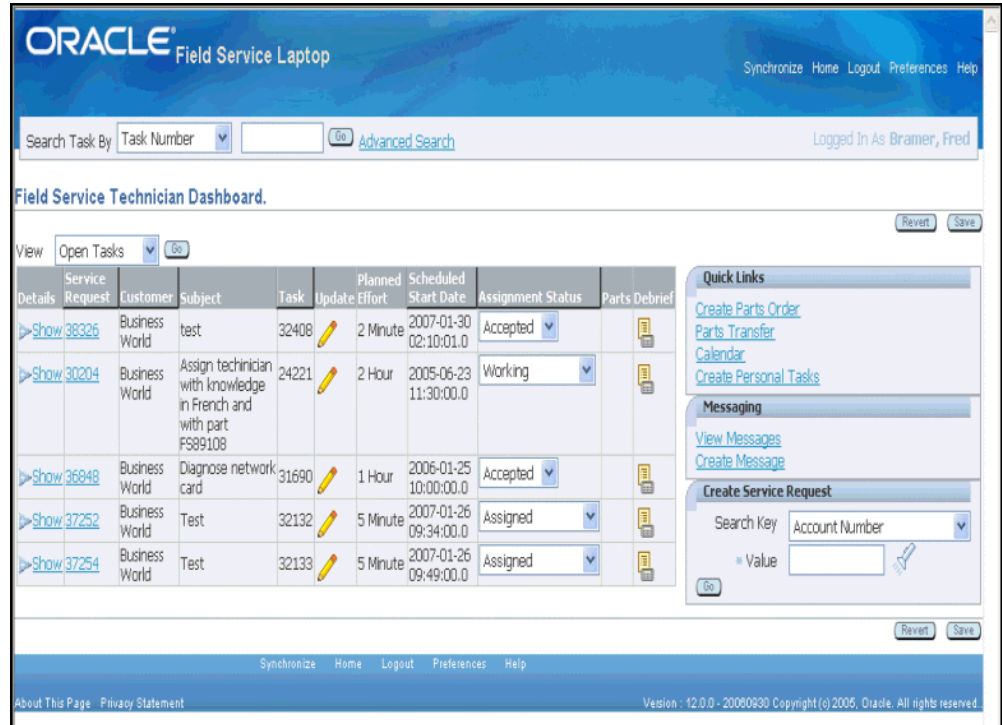

## Launching Oracle Mobile Field Service/Laptop


### Steps

Complete the following steps to launch Oracle Mobile Field Service/Laptop:

1. From the Start menu, choose Programs > Oracle for Windows NT > Web to Go.

The internet browser opens in the login page. You can also access the login page by clicking on the Web-to-Go icon on the desktop.

Your internet browser opens the Oracle E-Business Suite login page.

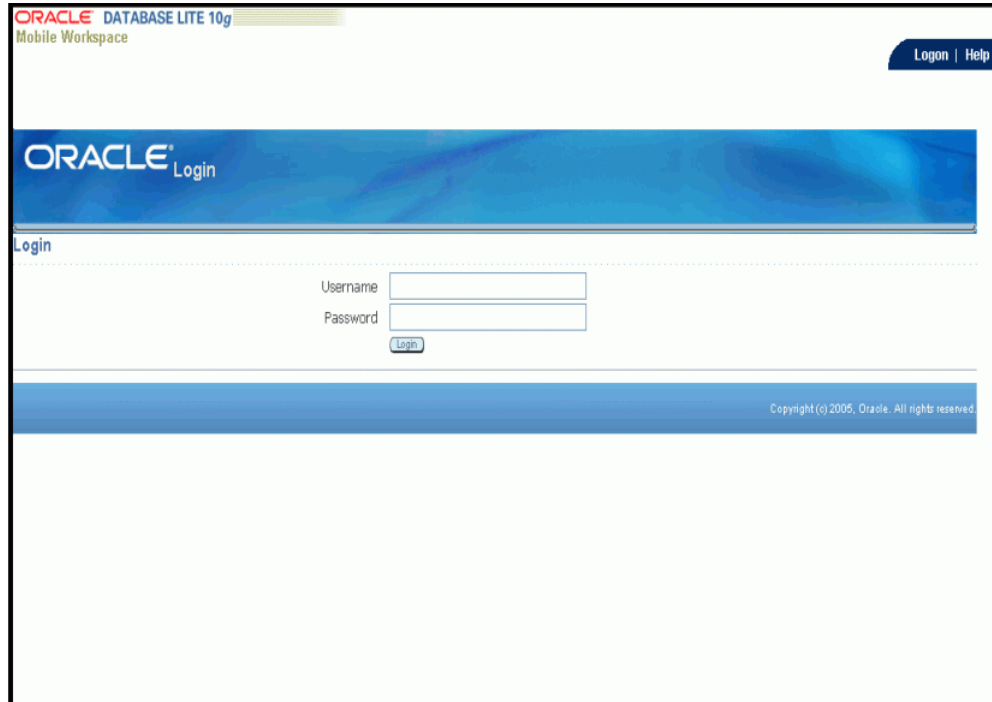


2. Enter your user name and password in the appropriate fields and then click **Go**.

Oracle Mobile Field Service/Laptop opens in the Calendar page (Daily View).

In order to receive new data assigned to you, such as new tasks and service requests, you need to synchronize with the enterprise system. Likewise, to send the changes that you make, such as creating debrief lines and updating task statuses, you need to synchronize with the enterprise system.

3. To do an incremental synchronization, click the **Synchronize** button in the upper right corner of the Calendar page.

The Oracle E-Business Suite Client Synchronization page opens with the current synchronization process in bold, italic text. A percentage value is found near each synchronization process to indicate its status. Click **Cancel** to terminate the current synchronization process.

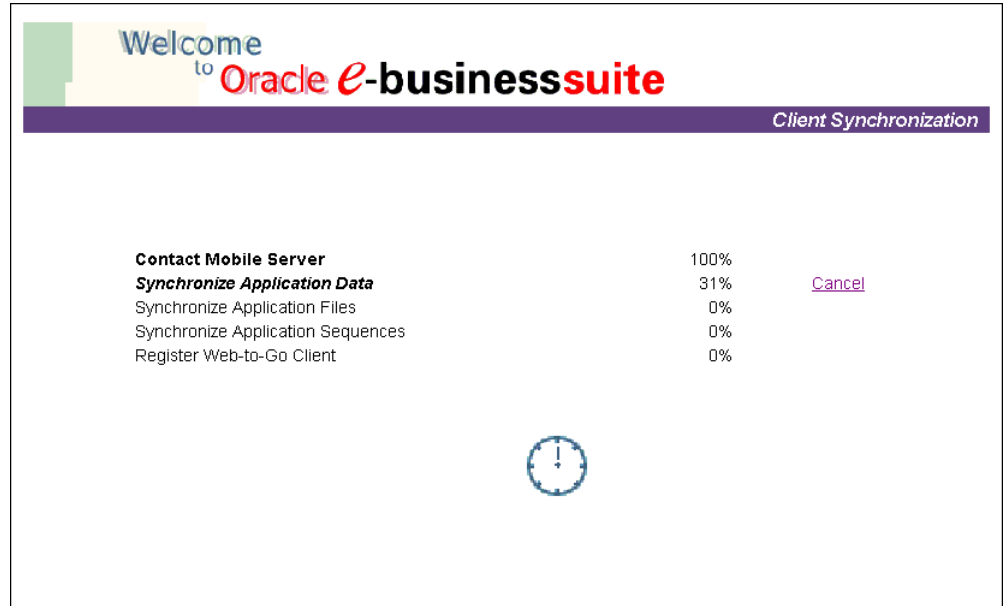

## Installing Oracle Mobile Field Service/Pocket PC

For the minimum software and hardware requirements for the a Pocket PC, see "Minimum Software Requirements", page 2-1 and "Minimum Hardware Requirements", page 2-2 .

To install Oracle Mobile Field Service on your Pocket PC, complete the procedures in the order listed in the following table:

Procedure	Perform At
1. Downloading and Installing the Oracle9i Lite Setup Program, page A-10	Client PC (the PC to which the Pocket PC hot syncs)
2. Performing an ActiveSync to put Oracle9i Lite Components, Oracle Mobile Field Service, and the Database on the Pocket PC, page A-10	Pocket PC
3. Configuring mSync on the Pocket PC, page A-12	Pocket PC
4. Performing a Full Synchronization to Retrieve Oracle Mobile Field Service and Data, page A-10	Pocket PC

Procedure	Perform At
5. Launching Oracle Mobile Field Service/Pocket PC, page A-14	Pocket PC

## Downloading and Installing the Oracle9i Lite Setup Program

Perform this procedure from the client PC desktop. In this procedure, you will download the mobile client from the mobile server and install the Oracle9i Lite setup program.

### Steps

1. Open your browser.
2. Enter the following URL in your browser, where <Mobile Server> is the domain name or IP address of the mobile server:  
`http://<Mobile Server>/setup`  
For example: `http://130.35.88.214:8000/setup`
3. Click the link to download the mobile client for Windows CE 3.00 on Pocket PC StrongARM setup program and save it.  
If you are using Internet Explorer, right click with the mouse, choose the option **Save target as**, and then click **OK**. Choose a location to save the setup program and click **Save**.
4. Using Windows Explorer, double click the setup.exe file that you just downloaded in order to run the setup program.  
Once started, the setup program prompts you to specify an install directory.
5. Choose an install directory, for example, `C:\MOBILECLIENT`, and then click **OK**.  
The Setup program downloads all the required components.

## Performing an ActiveSync to put Oracle10g Lite Components, Oracle Mobile Field Service, and the Database on the Pocket PC


### Steps

1. Connect the device to the client PC.
2. If you have not installed the Microsoft ActiveSync, install it and rerun the setup program.

3. Start Microsoft ActiveSync and then install Oracle9i Lite

Choose Tools > Add remove > [processor type], where [processor] is either SH3, SH4 or ARM.

#### **Microsoft ActiveSync**

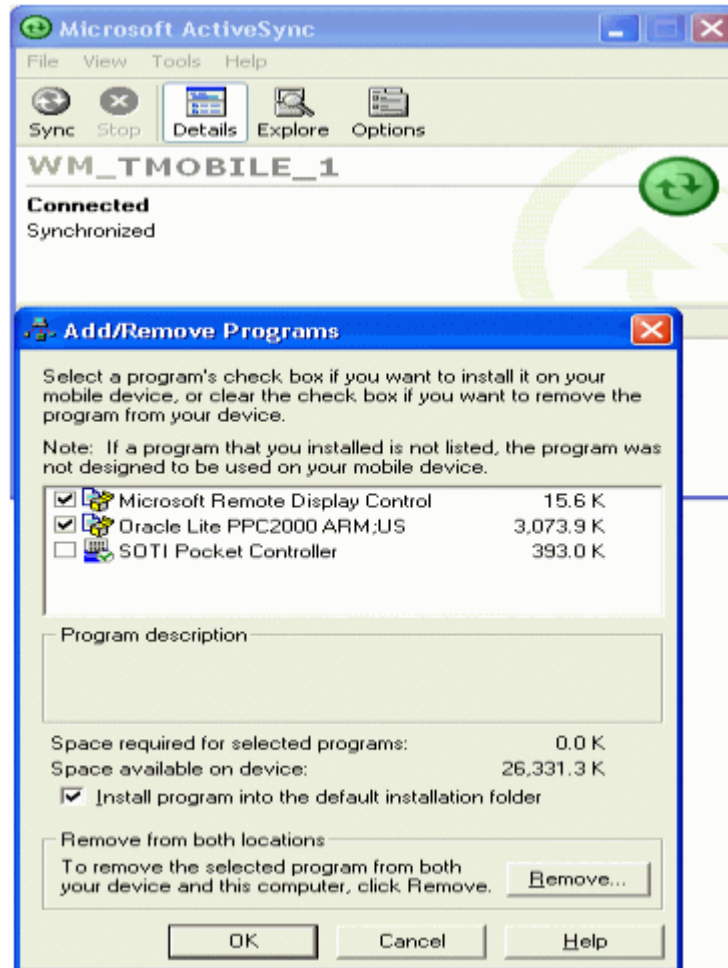

4. Perform an ActiveSync to put Oracle9i Lite components on the Pocket PC.

**Note:** To do an ActiveSync to retrieve Oracle Mobile Field Service/Pocket PC itself and the data associated with it, the computer that hosts the ActiveSync manager must be able to connect to the mobile server using HTTP. Therefore, you must be able to connect to the mobile server through HTTP.

You can also retrieve the application and copy the data onto the Pocket PC by connecting to any of the following modes:

- Wireless
- Infrared
- USB
- ActiveSync
- Modem

## **Configuring mSync on the Pocket PC**

Follow this procedure to install the Oracle Mobile Field Service application and the database on the Pocket PC.

### **Steps**

1. On the Pocket PC, choose Start > Programs.  
The Programs screen opens.
2. Tap the File Explorer icon.  
The My Documents screen opens.
3. From the drop-down menu, choose MyDevice.  
The My Device screen opens.
4. Tap the Orace folder.  
The Orace screen opens containing the mSync file.
5. Tap on the mSync file to open it.  
The mSync screen opens.



### mSync

The screenshot shows the mSync application window. The title bar is blue and contains the mSync logo, system icons, and the time 6:16. The main window area is white and contains the following fields and controls:

- User:** A text field containing the value "DBAKER".
- Password:** A text field containing "\*\*\*\*\*".
- Save Password:** A checkbox that is checked, with the text "Save Password" to its right.
- Server:** A text field containing the value "ap6280rt.us.oracle.com:8".
- Buttons:** Three buttons labeled "Exit", "Apply", and "Sync" are located below the text fields.
- Tools Bar:** A grey bar at the bottom of the window with the label "Tools" and a keyboard icon.

6. For each field, enter the value as indicated in the following table and then tap **Apply**:

Field	Value
User Name	mSync client user name. This is case insensitive. (This is the Mobile Field Service username.)
Password	mSync client password. This is case insensitive.
Change	Leave this check box deselected.
Save Password	Select this check box to save the mSync username and password.
Server	IPAddress:port

Field	Value
Use Proxy	Select this check box if appropriate.
Force Refresh	Leave this check box deselected.

## Performing a Full Synchronization to Retrieve Oracle Mobile Field Service and Data

### Steps

Complete the following steps to perform a full synchronization:

1. Ensure that you are connected to the network.
2. Tap **Sync** to start the synchronization.

After the ActiveSync, the mobile database and the mobile application are replicated to the client.

## Launching Oracle Mobile Field Service/Pocket PC

Complete the following procedure to launch the Oracle Mobile Field Service application on the Pocket PC.

### Steps

1. On the pocket PC device, choose **Start > Programs**.  
The Programs screen opens.
2. Tap the File Explorer icon.  
The My Documents screen opens.
3. From the drop-down menu, choose **MyDevice**.  
The My Device screen opens.
4. Tap the Orace folder.  
The Orace screen opens containing the `Fieldservice.exe` file
5. Click on `Fieldservice.exe`.  
The Oracle Mobile Field Service/Pocket PC opens.

## Creating a Shortcut for Oracle Mobile Field Service/Pocket PC

Complete the following steps to create a desktop shortcut for Oracle Mobile Field Service/Pocket PC:

1. Select the `FieldService.exe` file in the `\My Device\Orace` directory to get the selection options.

This is the same as the cut-and-paste option on the Pocket PC.

2. Choose the **Copy** option.
3. Go to the directory where the link is to be created.

For example, `\My Device\Windows\Start Menu`.

4. Click on the **Edit** option in the bottom menu bar.
5. In the menu pop-up, select **Create Shortcut**.

The application can now be accessed through the shortcut and will be listed in the Start Menu List of programs.

## Subsequent Synchronizations for Oracle Mobile Field Service/Pocket PC

This section describes how to synchronize the database on the Pocket PC.

### Steps

1. Go to the Oracle Mobile Field Service application.
2. Go to the home page of the application.
3. Click on the mSync icon.



---

## Item Handling

This appendix covers the following topics:

- Limiting System Item Download
- Setting Up System Items for Install Base Transactions
- Setting Up Install Base Profile Options
- Removing and Installing Parts in Oracle Mobile Field Service
- Ordering and Transferring Parts

### Limiting System Item Download

This section describes the profiles used to filter system items by category. The Item Category Filter and Item Category Set Filter profiles allow for the reduction of system items downloaded to the mobile computer device.

The following system items are replicated to the mobile computer device:

- Items used in a service request assigned to or created by the mobile user
- Item instance items used in a service request assigned to or created by the mobile user
- Items used in debrief lines
- Items used in item orders
- Items present in a good subinventory assigned to the mobile user
- Items present in the inventory organization specified by the Service: Inventory Validation Organization profile

For Oracle Mobile Field Service/Laptop, set the following profiles to filter the system by category:

- CSL: Item Category Filter
- CSL: Item Category Set Filter

See "Setting Up Profile Options for Oracle Mobile Field Service/Laptop", page 4-6 for a complete description of these profiles.

For Oracle Mobile Field Service/Pocket PC, set the following profiles to filter the system by category:

- CSM: Item Category Filter
- CSM: Item Category Set Filter

See "Setting Up Profile Options for Oracle Mobile Field Service/Pocket PC", page 4-10 for a complete description of these profiles.

The two category profiles for the Oracle Mobile Field Service applications enable you to setup category sets (profile 1) and relate categories to this (profile 2). The category set and category profile make the unique key for replication. The values that can be selected for the category set profile are all categories sets of the master organization and the inventory organizations.

**Note:** You can set the category profiles for the Oracle Mobile Field Service applications at all levels.

The following are the rules governing the use of category profiles.

- If the category profile is not set (no category is entered), then all items related to the default inventory organization are replicated to the mobile clients
- If the category profile is set (category is entered), then the system items replicated are filtered based in inventory organization and category.
- Items used in a service request created on the backend will not be impacted by this profile. But for service requests that the field service representative wants to create on a mobile computer device the category profile will limit the list of items available.
- The category profile does not affect the OnHandQty (stock in subinventory).

If profiles CSL\_ITEM\_CATEGORY\_SET\_FILTER and CSL\_ITEM\_CATEGORY\_FILTER are also both set, an additional filter on the item category/category set combination applies.

Items used in a field service report debrief are replicated as normal. This is independent of the category profile.

## Setting Up System Items for Install Base Transactions

### Steps

Complete the following steps to set up system items for install base transactions:

1. Log in to the Forms application using the responsibility Inventory.
2. Create a miscellaneous transaction, putting the item in a Subinventory.
3. Navigate to `Setup > Organizations > Subinventories`.
4. Create at least one subinventory in the Service Master Organization.  
The subinventory should be a Quantity Tracked, AssetSubinventory.
5. Set the Locator Control value to `None`.
6. Create a subinventory in the inventory organization, which will be used as the good subinventory.
7. In the same organization as the subinventory of the mobile resource, create system items that are one of the following:
  - Transactable (Inventory tab page)
  - Trackable (Inventory tab page)
  - Serviceable (Service tab page)
  - Of type Material (Service tab page)
8. Put the trackable item you defined above in your good Subinventory (using Miscellaneous Transactions). Also put a non-trackable item there. The trackable item should be created as an install base product instance in the back end.
9. Under the responsibility Field Service Manager, navigate to `Spares Management > Setup > Resource Addresses and Subinventories`.
10. Create a new record for your mobile resource by entering its name. Assign a Primary Address and the two Subinventories you created to it.
11. The condition of the Subinventory in the Master Organization should be set to `Defective` and the condition of your Transaction Organization Subinventory should be set to `Usable`.

## Setting Up Install Base Profile Options

Set up profiles as indicated in the following table:

Profile Name	Value	Comments
CSE: Miscellaneous Issue to Project Transaction Type	Issue to	none
CSE: Miscellaneous Receipt From Project Transaction Type	Receipt from	none
CSE: PA Expenditure Type	Material	none
CSE: Bypass Event Queue	Y	This profile is used to bypass some queues, so when miscellaneous transactions are created they will be directly inserted into Install Base.

Adjusting transaction types so they can be used for install base updates can be done under the responsibility Installed Base Admin and navigating to **Setups > Transaction Types and Sub Types**. Transaction types can be used for removing install base products by setting the **Change Owner To** field in the **Source Info** section of the form to **Internal**. By setting this field to **External**, the transaction type can be used for installing new install base products.

## Removing and Installing Parts in Oracle Mobile Field Service

Whether an install base update is done when removing a part in Oracle Mobile Field Service depends on the selected transaction type when doing a material transaction.

If the **Change Owner To** value of the selected transaction type is set to **Internal**, then the install base product to be removed can be indicated in Oracle Mobile Field Service.

If the **Change Owner To** value is set to **External**, than a trackable product can be indicated from a usable subinventory. An install base product will be created upon debriefing the material transaction in Field Service Report with the **Update Installed Base** check box selected.



## Ordering and Transferring Parts

To create an item order in an Oracle Mobile Field Service application, at least one usable (good) subinventory has to be defined and assigned to the field service representative. Two usable subinventories have to be defined and assigned to the field service representative in order to do transfers.

Subinventories are set up using the Field Service Administrator responsibility and the Resource Addresses and Subinventories form. See the *Oracle Field Service Implementation Guide* for more details.



---

## Signature Control

This appendix covers the following topics:

- Overview

### Overview

A field service representative can capture the signature of a customer after performing the debrief on the Pocket PC or on the laptop computer using an appropriate external Topaz signature tablet. The signature is then synchronized with the enterprise system.

You can view a captured signature in the appropriate debrief screen of the Forms application. Viewing a signature in the Debrief form is exactly the same as viewing any other attachment.

On the toolbar, there is a paper clip icon. When you select an attachment linked to the debrief, the icon changes to a paper clip attached to a yellow document.

If the attachment viewer in the Forms application is not working, then check that the entries in wdbsvr.app (found in the Forms tier setup) are similar to the following:

- connect\_string = mobxbld1
- password = apps
- username = apps
- default\_page = APPS.fnd\_web.ping
- document\_table = APPS.fnd\_lob\_document
- document\_path = docs
- document\_proc = (null)
- name\_prefix = (null)

- `always_describe = (null)`
- `after_proc = (null)`
- `before_proc = (null)`
- `reuse = YES`
- `connmax = 30`
- `upload_as_long_raw = (null)`
- `upload_as_blob = *`
- `pathalias = fndgfm`
- `pathaliasproc = fnd_gfm.dispatch`

---

# National Language Support

## Overview

This appendix describes how to use National Language Support (NLS) to change the default language of Oracle Mobile Field Service, English, to the desired language of the user.

The profile option ICX: Language determines the language in which field service representatives receive data, messages, and labels for Oracle Mobile Field Service/Laptop or Oracle Mobile Field Service/Pocket PC.

As a prerequisite, install the NLS language for the Oracle E-Business Suite and then apply all patches in the NLS language when applicable.

From the Forms application, complete the following steps to change the default language of Oracle Mobile Field Service:

1. Change the profile ICX: Language to the desired language.
  1. Login with System Administrator responsibility.
  2. Navigate to Profile / System.
  3. Check the User check box and then enter the username.
  4. Enter the profile option name, ICX: Language, and then click **Find**.
  5. Change the language of the user level.
2. Run the Manage Mobile Users concurrent program (if it is not scheduled).
  1. Login with Mobile Administrator responsibility.
  2. Navigate to Concurrent / Requests.

3. Click **OK** to submit a single concurrent request.
4. Choose the Manage Mobile Users concurrent program from the list of values.
5. Click **OK**.

The Manage Mobile Users concurrent program detects the language change and then removes all records in the old language and insert them in the new language. This in turn, causes a full synchronization. After this synchronization, the user sees the application and data in the new language.

Oracle9i Lite can only use one language code set at a time. Oracle9i Lite has five sets of client libraries, one for each language (encoding). English/Western European, Japanese, Korean, Traditional Chinese, and Chinese are supported. When the Oracle9i Lite mobile server is installed, it will only install one set of client libraries. Therefore, an additional mobile server installation is required for every language if it uses a different code set. The administrator has to setup different URLs for each language. For example, the URL for English is the following: `server/webtogo/setup_eng.htm`, `server/webtogo/setup_jp.htm`. Users have to be informed of which URL they should use, based on the language they want.

As long as the languages use the same code set (such as English and Spanish), only one mobile server is required, as explained earlier.

---

## Troubleshooting

This appendix covers the following topics:

- Troubleshooting the Application Publishing
- Troubleshooting the Mobile User Concurrent Program
- Reviewing Upload Errors
- Manually Publishing Mobile Applications
- Understanding the Java Utility Command Syntax
- Usage Examples
- Publishing Applications with Multiple Mobile Server Instances
- Tracing Oracle9i Lite Mobile Server

### Troubleshooting the Application Publishing

Use this appendix to troubleshoot any problems that you are having with Oracle Mobile Application Foundation or Oracle Mobile Field Service.

Please check to ensure that the environment variables are set correctly in the file `asgovars.env`. Run the relevant diagnostic check as described in "Running Pre-seeded Tests", page 7-1.

### Troubleshooting the Mobile User Concurrent Program

This section discusses known issues regarding the concurrent program that creates mobile users, `MANAGE MOBILE USERS`. This Java concurrent program creates mobile users. JDK 1.3.1 is required in the concurrent tier. Therefore, you need to apply patch 2356331 and follow the instructions in *OracleMetaLink* Note 130091.1 in order to use JDK 1.3.1.

## Problems and Resolutions

### The Concurrent Program Fails to Create Mobile Users

**Problem:** After the patch is applied and the post-installation setup is completed, the concurrent program still does not work.

**Resolution:** Restart the concurrent managers so that the new environment settings are initialized. To find out whether a concurrent request is being initialized to JDK 1.3.1 settings, use the following script:

```
select variable_name,value
from fnd_env_context e,
fnd_concurrent_processes p,
fnd_concurrent_requests r
where p.concurrent_process_id = e.concurrent_process_id
and p.concurrent_process_id = r.controlling_manager
and r.request_id=&request_id
and e.variable_name in ('AF_JRE_TOP','AFJVAPRG','AF_CLASSPATH')
```

This script accepts a concurrent request ID and prints the environment settings for that request.

### The Concurrent Program Only Works Intermittently

**Problem:** The concurrent program only works intermittently.

**Resolution:** Make sure all concurrent managers are restarted. It is possible that only one concurrent manager was restarted. However, a concurrent request might be started by any of the concurrent managers. If all the concurrent managers are not restarted, then some of the requests might not have the correct settings. To verify this, use the script listed above for requests that fail.

### The Concurrent Program Log Shows the Error Message

**"oracle.lite.web.resource.ResourceException: java/lang/ThreadLocal"**

**Problem:** The log generated by the concurrent request shows this error.

**Resolution:** This is the clearest indication that the JDK version is not 1.3.1. The above mentioned class (ThreadLocal) is in JDK 1.2.2 or higher. Again, check if the environment settings are correct.

### All Environment Settings Appear Correct, But the Concurrent Program Still Does Not Work

**Problem:** The environment settings that appear in the script listed in "The Concurrent Program Fails to Create Mobile Users", page E-2 indicate that JDK 1.3.1 is used. However, the concurrent program still fails.

**Resolution:** Look into the concurrent request's log file and look for any exceptions. Then for each of the environment variables AF\_JRE\_TOP, AFJVAPRG, and AF\_CLASSPATH, check if the files listed exist.



## Reviewing Upload Errors

Upload errors are generated during the upload process when some of the data fails to be applied to the enterprise database. Upload errors can be caused by the following:

- System issues

It is possible that the system is on a different mobile patch level than what is required.

- Setup issues

The correct business process type or the correct profile setting is not set on the enterprise system. For example, it is necessary that the expense type for an expense line is set correctly.

- Faulty data or conflicts

Oracle Mobile Application Foundation maintains a log of all upload errors. You can use the Mobile Application Foundation Administration Console to view and manage these errors. See the upload errors sections in Chapter 6, "Administrative Tasks", page 8-1 for further details.

## Manually Publishing Mobile Applications

For the mobile applications to function, you must create mobile application objects and publish the mobile application file. You can accomplish this by running the Java post-install program for each mobile application. The Java post-install program does the following:

- Registers the mobile object definitions for the mobile applications in the Oracle9i Lite mobile server repository.
- Publishes the mobile applications to the Oracle9i Lite mobile server repository.

Use the following procedure to run the Java post-install program:

- Shut down the mobile server while publishing mobile applications and then restart the mobile server after publishing is complete.
- Before publishing the mobile applications, open the webtogo.ora file and set the following parameters:

**Note:** - TRACE\_ENABLED = YES

- TRACE\_DESTINATION = CONSOLE

- TRACE\_LEVEL = 7

These parameters appear twice in the webtogo.ora file and should be set identically in both places.

After you publish the Oracle Mobile Field Service applications, reset the above parameters to their original values.

## Steps

1. Run the environment variable script.

See "Steps to Run the Environment Variable Script", page 3-2 for a complete description of this procedure.

2. Publish the application for the mobile framework (JTM):

```
java -DJTFDBCFILE=<DBC FILE PATH> -DAFLOG_ENABLED=TRUE

-DAFLOG_LEVEL=STATEMENT oracle.apps.asg.setup.InstallationMgr
<DB_HOSTNAME> <DB_PORTNUM> <ORACLE_SID> <APPS_USER_NAME>
<APPS_PASSWD> JTM_TOP JTM/JTM.ini html/download/jtm.zip
```

See "Understanding the Java Utility Command Syntax", page E-4 for an explanation of the command syntax of this Java program.

3. Publish the mobile applications for the mobile products that you want to implement.

See "Usage Examples", page E-5 for usage examples for Oracle Mobile Field Service/Laptop and Oracle Mobile Field Service/Pocket PC.

## Understanding the Java Utility Command Syntax

The following Java utility is used in the preceding procedure, "Manually Publishing Mobile Applications", page E-3:

```
java -DJTFDBCFILE=<DBC FILE PATH> -DAFLOG_ENABLED=TRUE

-DAFLOG_LEVEL=STATEMENT oracle.apps.asg.setup.InstallationMgr
<DB_HOSTNAME> <DB_PORTNUM> <ORACLE_SID> <APPS_USER_NAME> <APPS_PASSWD>
<PROD_TOP_NAME> <INI_FILE_NAME> <ZIP_FILE_NAME>
```

Its command syntax is as follows:

- DJTFDBCFILE, DAFLOG\_ENABLED, and DAFLOG\_LEVEL are used by the JTT Logging Framework.
- DBC\_FILE is usually found under the \$FND\_TOP/secure directory.
- The parameters <DB\_HOST\_NAME>, <DB\_PORT\_NUMBER>, <ORACLE\_SID>, <APPS\_USER\_NAME>, and <APPS\_PASSWD> are used to generate the connection

string to the database.

- `<PROD_TOP_NAME>` refers to the application directory for the mobile product for which the publishing is done. It should be NULL if publishing is not done.
- `<INI_FILE_NAME>` refers to the name of the list file which has the list of files to be published. It should be NULL if publishing is not done.
- `<ZIP_FILE_NAME>` refers to the name of the zip file which contains the files to be published. The location of this file is relative to the `<PROD_TOP_NAME>`. It should be NULL if publishing is not done.

## Usage Examples

In order to run the post-install step for Oracle Mobile Field Service/Pocket PC, the command would be:

```
java -DJTFDBCFILE=<DBC FILE PATH> -DAFLOG_ENABLED=TRUE  
  
-DAFLOG_LEVEL=STATEMENT oracle.apps.asg.setup.InstallationMgr  
<DB_HOSTNAME> <DB_PORTNUM> <ORACLE_SID> <APPS_USER_NAME> <APPS_PASSWD>  
CSM_TOP CSM/CSM.ini html/download/CSM.zip
```

In order to run the post-install step for Oracle Mobile Field Service/Laptop, the command would be:

```
java -DJTFDBCFILE=<DBC FILE PATH> -DAFLOG_ENABLED=TRUE  
  
-DAFLOG_LEVEL=STATEMENT oracle.apps.asg.setup.InstallationMgr  
<DB_HOSTNAME> <DB_PORTNUM> <ORACLE_SID> <APPS_USER_NAME> <APPS_PASSWD>  
CSL_TOP CSL/CSL.ini html/download/csl.zip
```

## Publishing Applications with Multiple Mobile Server Instances

If you plan to set up multiple mobile servers in order to support a greater number of mobile users and distribute the load, you should publish the mobile application only once, to the primary server.

The primary server is usually the mobile server which you set up first and installed the repository on. This server contains the directory location where the mobile application files are stored when you publish them. The `webtogo.ora` file contains an entry, `ROOT_DIRECTORY`, which points to this location.

Secondary mobile servers need to have access to the location of this root directory through network file sharing (NFS). The `ROOT_DIRECTORY` `webtogo.ora` entry of the secondary mobile servers will point to this directory location.

When you publish applications, you need to set the `ORACLE_HOME` to the location of

the directory where the primary mobile server is installed.

## Tracing Oracle9i Lite Mobile Server

This section lists the steps required to enable or disable tracing in Oracle9i Lite mobile server for selected users. These steps do not require the mobile server to be restarted.

### Enabling Tracing in Oracle9i Lite Mobile Server

1. Access the Mobile Server Login page.

This page is available at: `http://<mobile_server_host>:<port>/webtogo`



Oracle9i Lite

Help | Logon

Workspace

User Name:

Password:


Logon

■ [About Web-to-Go](#)

Copyright © Oracle Corporation, 2001  
Minimum requirements: Netscape 4.06/MSIE 4.0  
browser with JavaScript enabled, 800x600 display.

2. Enter Administrator in the User Name field and the password in the Password field, and then click **Logon**.
3. Click **Control Center Link**.

The Control Center window opens.

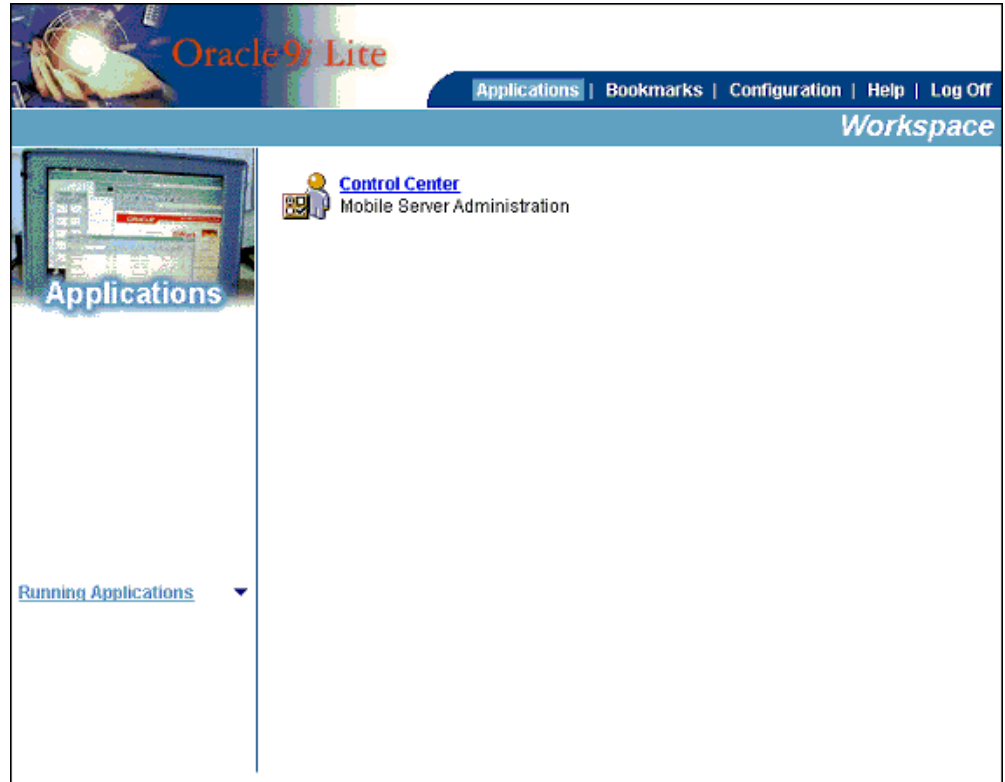

4. Click the Server tab.
5. Click **Trace** on the left side of the page.  
The Server Trace Setting page opens.



6. Set the following parameters:
  - For Trace Output, click the On radio button.
  - For System Filter, select both the HTTP Requests and SQL Statements check boxes.
  - In User Filter section, click the Selective Users radio button and then type the comma-separated list of users.
7. Scroll down and specify the following:
  - Click the File radio button to specify the destination.
  - Type trace.log in the Trace File base name field.
  - Type 10 in the Trace file size of (in MB) field.
  - Type 15 in the Trace file pool size field.
  - Select the Create trace file for every user check box.

With the above settings, every user will have a separate trace file. These trace files are located in the Oracle9i Lite \$ORACLE\_HOME/mobile/server/bin folder. The files are named trace\_log\_<user\_name><log\_file\_num>.log. So, for example, user FBRAMER's trace files are named as trace\_log\_FBRAMER1.log, trace\_log\_FBRAMER2.log, etc. The Trace file pool size (15 in this case) specified above controls when the log\_file\_num cycles. For example, once trace\_log\_FBRAMER15.log reaches 10MB size, the next file name will be trace\_log\_FBRAMER1.log. Note that it will overwrite existing file with the same name. So, the Trace file pool size should be set so that all the files will be available as needed.

The screenshot shows the Oracle9i Lite Control Center interface. The top navigation bar includes 'Applications', 'Users', 'Sites', 'Server' (selected), 'Jobs', and 'Help'. The main title is 'Control Center'. On the left, there is a 'System Status' sidebar with links: 'Status Summary', 'Access Control', 'Sessions', 'MGP Control', 'Server Certificate', 'Trace' (selected), and 'MGP Trace'. The main content area is titled 'Destination' and contains two sections: 'Console' and 'File'. The 'File' section is active, showing fields for 'Trace file base name' (trace.log), 'Trace file size (in MB)' (10), and 'Trace file pool size' (15). A checkbox 'Create trace file for every user' is checked. Below this is the 'Remote' section with fields for 'Trace monitor host' and 'Trace monitor port' (0). At the bottom right, there are buttons for 'Save', 'Apply', and 'Reset'.

8. Click **Save**.

A dialog box appears indicating that the save was successful.

9. Click **OK**.

#### Files to be Uploaded

The following files need to be uploaded after obtaining trace.

- trace\_sys1.log. If available, trace\_sys2.log and so on.
- trace\_log\_main1.log. If available, trace\_log\_main2.log and so on.

- trace\_log\_<user\_name>\*.log. See step 7 in "Enabling Tracing in Oracle9i Lite Mobile Server", page E-6.

### Disabling Tracing in Mobile Server

1. Complete steps 1 through 4 in "Enabling Tracing in Oracle9i Lite Mobile Server", page E-6.
2. Click **Trace** on the left side of the page and then set Trace Output to Off.

Oracle9i Lite

Applications Users Sites **Server** Jobs Help

**Control Center**

**Server**

**System Status**

- [Status Summary](#)
- [Access Control](#)
- [Sessions](#)
- [MGP Control](#)
- [Server Certificate](#)
- [Trace](#)
- [MGP Trace](#)

**Server Trace Setting**

[Save](#) | [Apply](#) | [Reset](#)

Trace Output: ☐ On ☒ Off

**Filter**

System Filter

HTTP Requests: ☒

SQL Statements: ☒

Java Methods: ☐

User Filter

All Users: ☐

No Users: ☐

Selective Users (comma separated user names): ☒

3. Click **Save**.  
A dialog box appears indicating that the save was successful.
4. Click **OK**.



---

# Mobile Synchronization Scalability and Performance

This appendix covers the following topics:

- Overview
- Test Environment
- Test Results
- Performance Tuning of Mobile Application Foundation

## Overview

The Oracle Mobile Application Foundation (MAF) provides data synchronization for Oracle Mobile Field Service/Laptop and Oracle Mobile Field Service/Pocket PC of the Oracle E-Business Suite. This appendix provides benchmark results that demonstrate the scalability of the MAF architecture to large numbers of mobile users on low-cost server hardware running Linux. You can use these results to determine hardware requirements for implementing Oracle Mobile Field Service.

Mobile users periodically synchronize their mobile computer devices with the enterprise system in order to download new Oracle Mobile Field Service data and upload changes that they have made in their applications.

Synchronizing a mobile client with the server consists of three basic steps:

1. Preparing data and connecting to the network
2. Communicating with the Oracle9i Lite mobile server
3. Disconnecting from the network, processing and displaying the new data

While all three steps are important factors in determining the total synchronization time experienced by mobile users, only the time spent communicating with the mobile server affects the ability of the system to scale to large numbers of mobile users.

**Note:** When modems are used with circuit-switched networks, the connection time may be a large portion (up to 30 to 40 seconds) of the total synchronization time.

In this benchmark, the server load is characterized by the number of connections per minute. Simulated connections are started at a constant rate and the behavior of the server is measured under this steady load. Eventually, as the connection rate is increased, the server is no longer able to complete the requests at the rate that they are being started.

When the incoming load exceeds the maximum steady-state performance of the system, connections are queued until the load decreases and the server is able to catch up. This allows the server to handle sudden bursts of activity without a failure. However, in this case connection times will be longer due to the queuing.

In order to prevent arbitrarily long connection times, the server can be configured to refuse new connections if the queue exceeds a specified size. Mobile users will instead receive a message stating that the server is unavailable and to try again later.

## Test Environment

The test system consists of a load generator running on a set of PCs, a single Oracle9i Lite mobile server, plus a separate Oracle9i database server. The load generator simulates mobile client connections, and can be programmed to initiate connections at a specified rate. The load generator is connected to the mobile server via a LAN connection.



The load generator simulates the actual Mobile Field Service client application. The Oracle9i Lite database and Mobile Field Service application are pre-installed and an initial full synchronization is performed prior to the test.

The connections are made over a high-speed LAN rather than a dial-up network, but the total load on the mobile server for a given synchronization rate does not depend strongly on the speed of the connections.

## System Configuration

The following is the hardware and software configuration for the test system:

### Load Generator

---

Server Type:	4 PCs
Number of CPUs per PC:	1 Intel Pentium III CPU
CPU Speed:	531-598 MHz
Main Memory per PC:	512 MB
Network Interface:	100 Mbps Fast Ethernet NIC
Operating System:	Microsoft Windows NT 4.0 SP6

---

### Mobile Server and Database Server

---

Server Type:	Dell PowerEdge 2650
Number of CPUs:	2 Intel Xeon CPUs
CPU Speed:	2.8 GHz
Main Memory:	6 GB
Network Interface:	Two Integrated Gigabit NICs
Operating System:	Red Hat Enterprise Linux AS 2.1

---

### Software

---

Oracle E-Business Suite:	Release 11i.8 Rapid Install
Oracle Mobile Field Service:	Patch set 8.3.5
Oracle9i Lite:	Release 5.0.2.3d
Oracle9i Database:	Release 9.2.0.2

---

**Note:** For the mobile and database servers, Red Hat Enterprise Linux AS 2.1 supports the Hyper-Threading feature of the Intel Xeon processors in the Dell PowerEdge 2650. The total cost of these systems

is less than \$10,000 USD each.

The Oracle E-Business Suite was installed using the 11i .8 Rapid Install. Oracle9i Lite was installed as described in "Installing and Configuring Oracle9i Lite", page 3-1 . No special database or application tuning was performed.

## **Test Data**


Each test run simulates connections from 100 distinct mobile users. Prior to starting the test, transactions are performed on the enterprise system to queue up data for each mobile user. To simulate a typical load for a field service representative, each mobile user is assigned three service requests, three tasks, and three notes, plus additional supporting records. A total of 21 rows from 10 tables are downloaded to each mobile user. The total compressed size of the downloaded data is 2.6 KB. No data is uploaded to the mobile server from the mobile clients during this test.

## **Test Results**

This section describes the test applied to Oracle Mobile Field Service and resulting performance specifications.

## **Synchronization Time**

During the test, the time taken by each mobile user to communicate with the mobile server is recorded. The top and bottom 5% of the synchronization times are discarded before computing the minimum and maximum synchronization times.

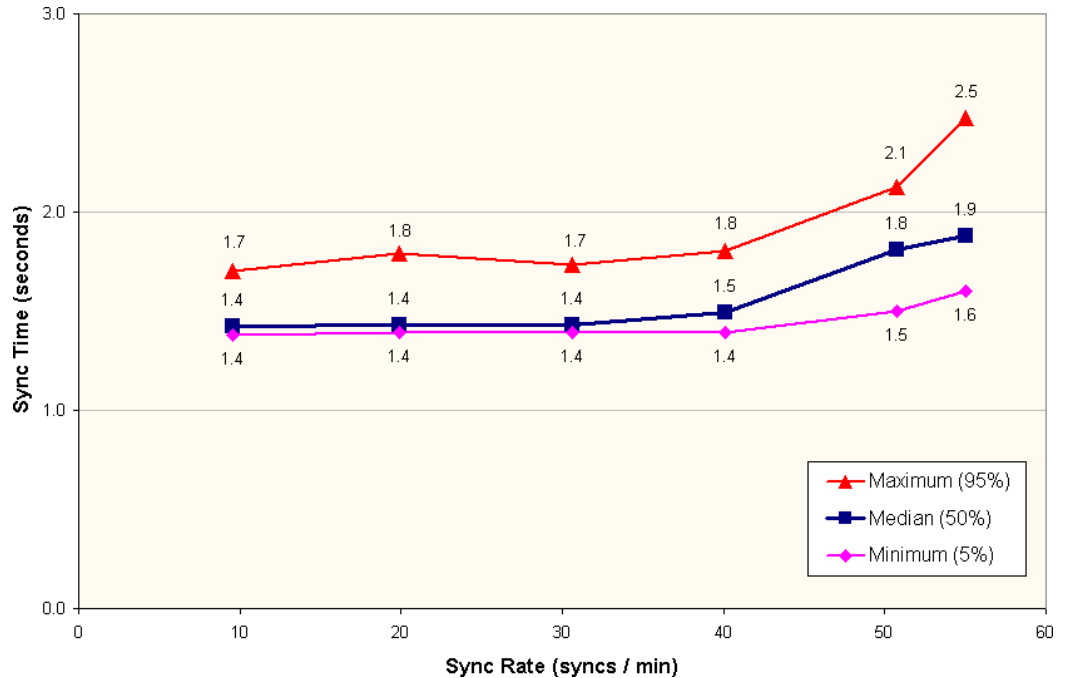

The median synchronization time rises quite slowly as the synchronization rate is increased. Up to a synchronization rate of 40 synchronizations/minute, the synchronization time is essentially constant at just under 1.5 seconds. The median synchronization time increases from 1.4 seconds to 1.9 seconds (32%) as the synchronization rate increases from 10 to 55 connections per minute.

## CPU Load


The average CPU load on the database computer and middle tier computer rises nearly linearly as the synchronization rate is increased. At 55 synchronizations per minute, the average database load is 13% while the average mobile server load is 20%. For a graphics representation of the CPU load, see the graph in "CPU Usage Tuning."

**Note: Note:** The Xeon Hyper-Threading is enabled during the test, so the average CPU usage is calculated over the four logical processors rather than the two physical processors.

## Maximum Steady-state Performance

At a synchronization rate of 55 connections per minute, the average synchronization time remains very low and the peak CPU load on the database computer and middle tier computer is reasonable. However, beginning at a synchronization rate of 60 connections per minute, the server can no longer process the requests as fast as they arrive, so the excess requests are queued up. When the incoming load stops at the end of the test, the mobile server completes the remaining requests. All of the requests

completed without errors.

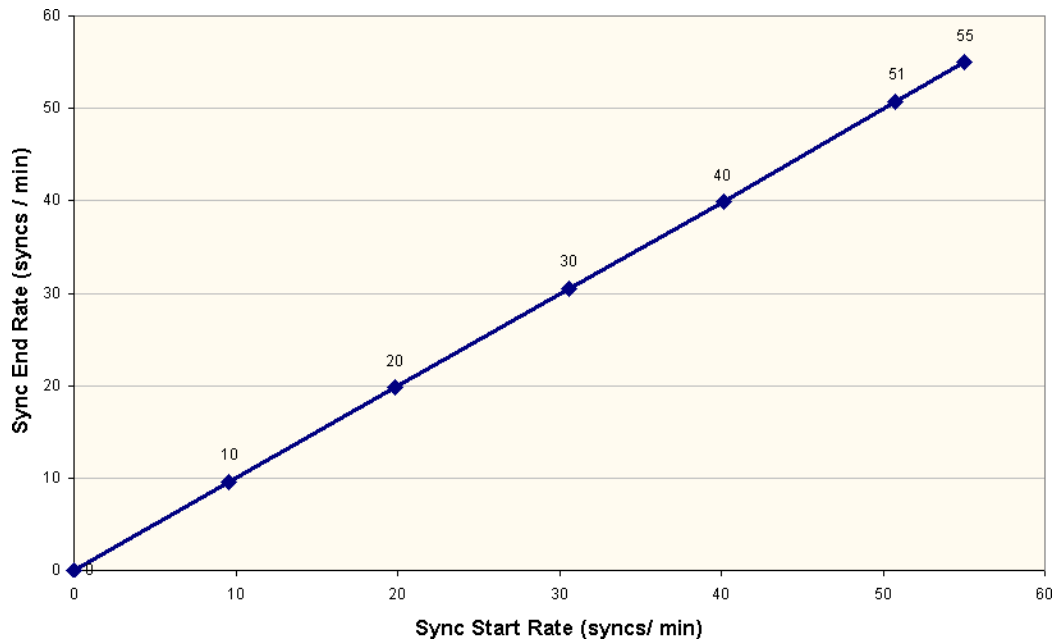

## Laptop End-End Synchronization Test

In addition to the server capacity, the end-user is interested in what is the end-end synchronization time. For Oracle Mobile Field Service/Laptop, this is the time that elapses from the point the user initiates synchronization in the application to the point the application returns to the calendar screen. This time includes the following:

- Time to contact the mobile server and authenticate the user and process data for the user

Server side scalability is only impacted by this and has been discussed in depth in the preceding sections.

- Time taken to check if there is an application upgrade

Apart from data transfer, the synchronization operation also checks if there is a new version of the software. If there is a new version of the software it downloads the same. This being a search against the server file system does not impact scalability

- Time taken for the application to restart the calendar screen.

This does not depend on the number of users and is only a function of the device the user uses.

The following table describes the synchronization data amount and synchronization times for end-end synchronizations for Oracle Mobile Field Service.

Scenario	Amount of Data Transferred	Fixed Overhead (Logon, Authentication and Application Upgrade)	Time Taken on LAN	Time Taken on Wireless Network (50 kbps)
Null End-End synchronization with no updates either on client or server	1K	5.6K	16s	29s
Synchronization with user updating one task with two notes, six debrief lines	4K	5.6K	17s	31s
Synchronization with three new service requests, three new tasks and three new customers and three new install base items	4K	5.6K	17s	33s

## Bulk Record Update Test

In addition to normal daily transactions, organizations periodically make changes to large numbers of records in the enterprise system, such as a quarterly update to the System Items table in a field service organization. After such a bulk update of records, the modified records are downloaded to each mobile user during their next synchronization.

To test the scalability of the Mobile Application Foundation for bulk updates, the synchronization time was measured for a single mobile user after modifying 96,000 system item records. The test was performed with the mobile client connecting over a high-speed local area network. The following table summarizes the results:

Test Case	Total Time
Initial Download	4:14
All application data, including 96,000 system items	
Incremental Update	4:04
After 96,000 system items were updated	
Incremental Delete	2:54
After 96,000 system items were deleted	

The test results show that synchronization times for bulk updates are essentially limited by the transfer size of the modified records rather than scalability of the mobile server. On a wireless network, transferring 12MB of data will take at least 40 minutes (even at an ideal connection rate of 40kbps), which is an order of magnitude greater than the processing time. The mobile server compresses all data transfers for optimum performance. In this case, the system items average 125 bytes each.

The key to limiting the worst-case synchronization time is to intelligently limit the maximum amount of data that is downloaded to the mobile users. For example, Oracle Mobile Field Service products provide a category mechanism to specify which system items are needed for mobile users. Only those system items will be downloaded.

## System Sizing

In order to determine the appropriate hardware for the mobile server and database, develop a model of the anticipated system load during the workday. For example, the graph in this section shows a load model for an organization with 3,000 mobile users working in four U.S. time zones.

The workforce is assumed to be divided among the time zones as described in the following table:


Time Zone	Usage	Amount of Users
Eastern	35%	1,050
Central	30%	900
Mountain	10%	300



Time Zone	Usage	Amount of Users
Pacific	25%	750
Total	100%	3,000

As described in the following table, it is assumed that users synchronize three times per day, according to the normal distributions:

Synchronization	Mean Time	Standard Deviations
Start of workday	7:55	10 min
Middle of workday	13:00	3 hrs
End of workday	17:30	30 min

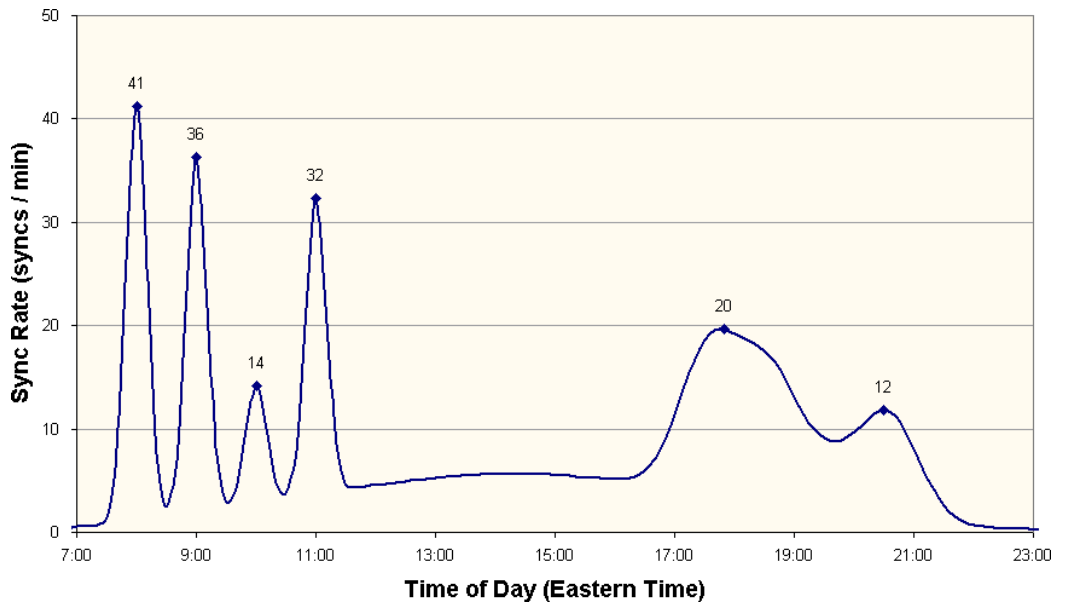

For this model, the peak load is 41 synchronizations per minute at 7:55 Eastern Time. This load is well within the capabilities of the reference configuration used for the benchmarks in this appendix. At the time of the peak load, the estimated synchronization time is 1.6 seconds and the average CPU load is 9% for the database and 13% for the mobile server.

## Conclusion


This benchmark demonstrates the high scalability of the Oracle Mobile Application Foundation running on low-cost hardware using Linux. Synchronization times for typical Mobile Field Service connections are very short (one to two seconds), and they remain low as the incoming request rate is increased. The CPU usage scales nearly linearly with the incoming request rate.

For the reference test configuration, the maximum steady-state synchronization rate is shown to be at least 55 connections per minute. At this rate, approximately 500 mobile users can synchronization in a 10-minute period. Depending on how concentrated the synchronization activity is at the peak times during the workday, this rate can support a field organization of several thousand mobile users. To determine system requirements, develop a model of the anticipated number of synchronizations per minute throughout the day, taking into account time zones and business processes.

The Oracle Mobile Application Foundation also robustly handles surges in load. When the incoming request rate exceeds the maximum steady-state performance of the system, the mobile server queues the excess connections and completes all of the requests without error, once the load drops below the maximum rate.

## Performance Tuning of Mobile Application Foundation

To achieve the test results described in this appendix, tune the Mobile Application Foundation as described in this section. Here, performance tuning issues specific to Oracle Mobile Field Service are addressed. The following figure illustrates the Oracle Mobile Field Service architecture.

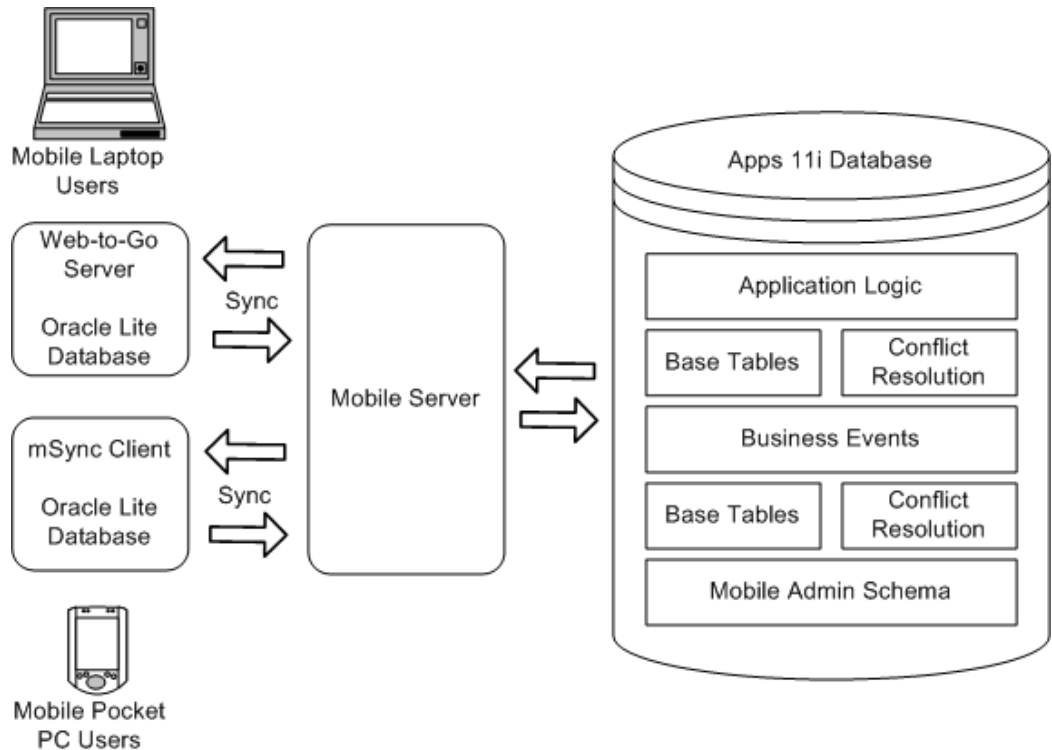

The Oracle9i Lite mobile server functions as a conduit between the mobile computer device and the enterprise database, transferring data and the Oracle Mobile Field Service application between the two. The first, or initial synchronization, from the mobile computer device installs the entire Oracle Mobile Field Service application as well as the data targeted for that mobile user. Subsequent synchronizations (also called incremental or fast synchronizations) only download application upgrades and incremental data. This incremental dataset consists of data updated on the mobile computer device since last synchronization and data ready on the server since the last synchronization. It can be expected that in a live or production instance, application upgrades are minimal and therefore incremental synchronizations mainly transfer new data. Synchronizations that do not involve either application upgrades or data transfer are called null synchronizations. Null synchronizations are useful for performance benchmarking since they provide the lowest possible synchronization time.

First-time synchronizations should be done on either a LAN or network with a high bandwidth so that the synchronization completes in a timely manner. First-time synchronizations over low-bandwidth (GPRS) networks can terminate due to low network time-out settings. In this case, the latency for preparing a first-time synchronization dataset could require minutes as opposed to seconds for subsequent synchronizations. If the first-time synchronization fails, the process must restart from the beginning.

You are not expected to tune the Oracle Mobile Field Service application on the mobile computer device, except to ensure that the minimum system requirements are met.

Administrators should use the following to assess system performance:

- Synchronization time.

Synchronization reports are provided to track synchronization times. Reports can be generated with various search criteria. See "Viewing User Synchronization Statistics", page 8-7.

- Mobile server CPU and memory usage.

This can be done in UNIX using the SAR command and in Windows using the Performance Monitor.

- Concurrent program run times.

Each mobile concurrent program should be monitored for excessive run times.

- Workflow background process run times.

## Mobile Server Tuning

For best performance, install the Oracle9i Lite mobile server and Apps11i database on separate servers. When Oracle9i Lite mobile server shares system resources with another server, ensure that the memory and CPU usage of the Oracle9i Lite mobile server is tuned to handle synchronization requests without overloading.

### Tuning Memory Usage

For optimum mobile server performance, ensure that the server has ample memory. The rule of thumb is to allocate a minimum of 512MB to the mobile server and then increment this amount by 512MB for every 1000 users. Therefore, for an installation with 1500 users, a memory allocation of 512MB (base allocation) plus another 512MB for a total of 1GB is best.

Start the mobile server as a java process to ensure that the server utilizes any extra memory. The command syntax to do this is given below:

```
java -Xms1024M -Xmx1024M -XX:+DisableExplicitGC ?XX:NewSize=128m
-XX:MaxNewSize=128m -XX:SurvivorRatio=2 oracle.lite.web.JupServer
mode=server config-file=/u01/olite/mobile/server/bin/webtogo.ora
```

- where -

?Xms1024M and ?Xmx1024M specify an initial and maximum heap size of 1024MB.


The rest of the java parameters optimize garbage collection.

To learn about performance tuning, see *OracleMetaLink* Note 265164.1.

### CPU Usage Tuning

CPU usage is directly related to the number of concurrent users. Concurrent users are mobile users who are actively synchronizing with the enterprise system at a given point of time. Typically, the maximum number of concurrent users is about 10% of the total user base. For example, if 250 mobile users are created, then you can expect a maximum of 25 concurrent users.

The following graph shows the CPU load with increasing concurrency from a benchmarking study. It shows a linear rate of increase in CPU load as the synchronization rate is increased. (See "CPU Load", page F-5 .) *Synchronization* rate is the number of synchronizations that are initiated every minute. In this benchmark, the synchronization time was between one and two seconds.

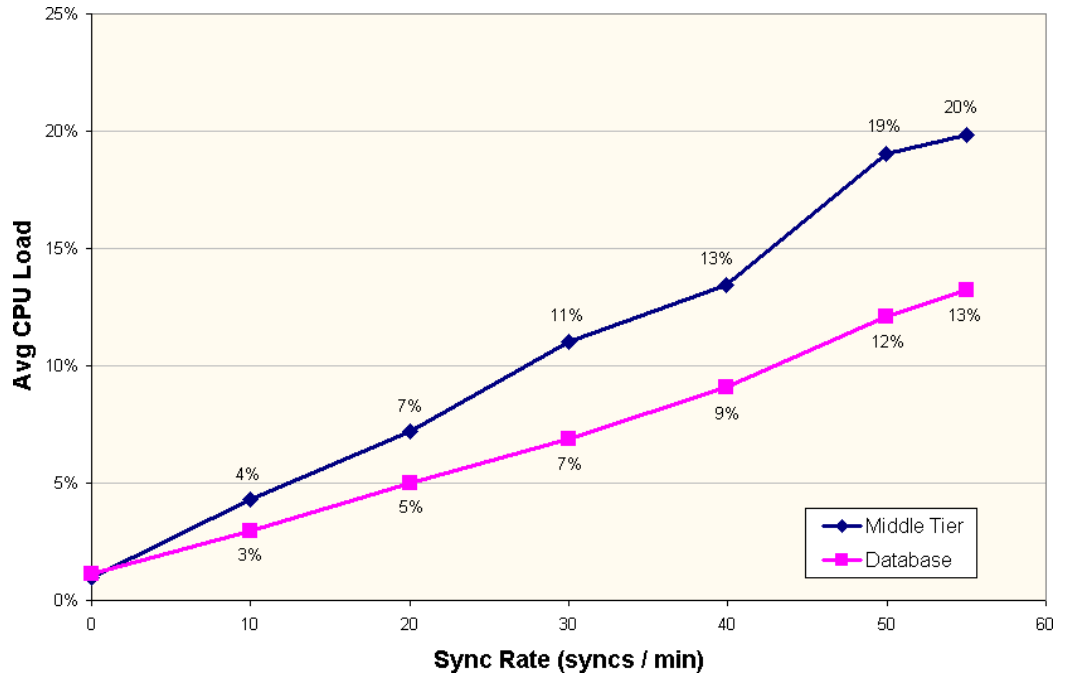

In order to limit the CPU load on the mobile server, it is possible to limit the number of concurrent users. The webtogo.ora parameter MAX\_CONCURRENT can be used for this purpose.

## Database Tuning

Mobile Field Service captures online business activities such as service request creation and task assignments and then downloads this data to the mobile users. Mobile Field Service uses both concurrent programs as well as workflow processes to find and prepare this data. Data that is prepared for synchronization is stored in the out queue. The out queue comprises two tables: ASG\_SYSTEM\_DIRTY\_QUEUE and ASG\_DELETE\_QUEUE.

### Tuning Out Queue

Better synchronization times can be achieved by tuning the out-queue. The out-queue performance is constantly being improved by tuning the queries executed on the out-queue tables. Since the tables are insert/delete intensive, one of the important storage parameters is PCTUSED. For best performance, set this parameter to a high value like 70%. The size of the out-queue is related to amount of business activity relevant to mobile. Data prepared in the out-queue is automatically removed after the mobile computer device receives it.

There are several indexes defined in the ASG\_SYSTEM\_DIRTY\_QUEUE table that eliminate the need for full table scans and optimize access. However, it is recommended that these indexes be managed carefully. Due to the insert/delete intensive nature of data management languages (DMLs) on this table, index-stagnation could become an issue. This will result in longer synchronization times even though the size of ASG\_SYSTEM\_DIRTY\_QUEUE table remains about the same. In this case, index-rebuilds have proven to be helpful.

It is possible to purge the out-queue for dormant users by scheduling the JTM Master Concurrent Program with category type "purge." This will purge records for dormant users. *Dormant users* are those who have not synchronized for the past N days, where N is the value of profile option, ASG: Dormancy Period. The JTM Master Concurrent Program will also remove any duplicate records in the out-queue. For best performance, schedule this program once every week.

### Tuning Concurrent Programs

For mobile operations, mobile concurrent programs place a big demand on the database, even more so than synchronization. The JTM Master Concurrent Program is a good example of this. For this program, you must run three category types: Transaction, Lookup and Inventory. You should regularly monitor the times taken for each category type. You can use the following table to do this.

Category Type	Scheduled Interval	Average Run Time
Transaction	5 min	
Lookup	1 hour	
Inventory	1 day	

The actual scheduled interval for these programs depend on your business requirements. However, the average run time should be compared with the scheduled interval to make sure that it is a very small fraction of the scheduled interval (less than 5% for Lookup and Inventory, and 20% for Transaction). If the concurrent programs take a longer time, then increase the scheduled interval so that the system is not overloaded.

### Workflow Background Process

The workflow background process is used only by Oracle Mobile Field Service/Pocket PC. You should submit this process with the Process Stuck parameter set to "No."

Finally, you should periodically analyze the database tables/indexes so that the optimizer can choose the best execution plan. The Oracle Mobile Field Service schemas are ASG, JTM, CSL and CSM. Tables in this schema should be analyzed together with tables from Field Service and other modules used by Oracle Mobile Field Service.

---

# Customization Support

This appendix covers the following topics:

- Overview
- Flexfield Support
- Changing Labels
- Generic Attachment Support
- Writing New Custom Screens

## Overview

This appendix describes the customization support for the Oracle Mobile Field Service applications. This appendix is intended for system integrators and implementation consultants who want to develop custom extensions for these applications.

Oracle Mobile Field Service provides rich functionality built into the standard product. In addition, you can tailor some customize the application to suit your business process.

The following are the means by which you can customize the Oracle Mobile Field Service application:

- Flexfield Support for additional data fields
- Changing Labels
- Attachment Support
- Writing New Custom Screens in the Oracle Mobile Field Service application to enable new features or extend additional features

Depending on your business needs, you may need to use one or more of the above means of customization.

What is not supported is modification to existing screens (adding/removing/hiding

fields) or changing the navigation between the standard screens.

## Flexfield Support

Flexfield support is available in both Oracle Mobile Field Service/Laptop and Oracle Mobile Field Service/Pocket PC. Descriptive flexfields can be used to display and capture additional information. Users can also use context-sensitive flexfields when the information stored by the application depends on other values users enter in other parts of the form. Table-validated flexfields are not supported by Oracle Mobile Field Service.

The following table describes the types of flexfields you can find in Oracle Mobile Field Service:

Flexfield	Laptop	Pocket PC
Service request	read/write	read/write
Task	read/write	read/write
Debrief header	read/write	read/write
Debrief line	read/write	read/write
Parts requirement	NA	read/write
Item	read	read
Product	read	read
Customer	read	read

## Steps for Setting up Flexfields

Complete the following steps to set up the descriptive flexfields in Oracle Applications that are specific to an Oracle Mobile Field Service application:

1. Log in to Oracle Applications as a system administrator and choose the System Administrator responsibility.
2. Navigate to `Application > Flexfield > Descriptive > Segments`
3. Click the Application field and search for Oracle Service.
4. Click the Title field and search for the component for which the flexfield(s) should



be created.

5. The Freeze Flexfield Definition check box indicates whether or not flexfields can be defined or updated. Make sure it is deselected so new flexfields can be defined.
6. Click **Segments** to display the Segments Summary form.
7. Click **New** to create a new flexfield definition or click **Open** to open an existing flexfield definition.
8. Enter the segment name in the Name field.
9. Click the button next to the Column field and select an attribute column from the Column list of values.
10. Enter a description in the Description field and a number in the Number field.
11. Click the search button in the Value Sets field and select a value set (this is the data type of the flexfield) from the list of values. The Description field will be automatically populated.

You can also select a default type from the Default Type list of values to indicate a default value in the Default Value field. Select or deselect the Required check box to specify whether a value is required or not.
12. Specify the flexfield size information in the Sizes section of the form.
13. Optionally, specify prompt information in the Prompts section of the form.

For example, prompts could be used when displaying a window that requests data input for the flexfield.
14. Optionally, click **ValueSet** to open the form where you can define new value sets or update existing value sets.
15. Click **Save** to save the new flexfield definition and close the Segments form.
16. Review the Segments Summary form shown and then close it.
17. If no more updates are needed, select the Freeze Flexfield Definition check box.
18. Click **Compile**.

## Viewing the Flexfields

The flexfields are downloaded and displayed in the Oracle Mobile Field Service application after synchronization.

Oracle Mobile Field Service/Laptop displays the flexfields for an entity on the same

page that describes the entity. For example, task flexfields are accessed from the Task Details page.

Oracle Mobile Field Service/Pocket PC has a separate icon, that opens a new screen with the flexfields.

## Changing Labels

Both Oracle Mobile Field Service/Laptop and Oracle Mobile Field Service/Pocket PC support label changes. Newly defined labels are visible to the end user.

For Oracle Mobile Field Service/Pocket PC, all labels are stored in the FND\_NEW\_MESSAGES table. Use the application developer responsibility to change labels.

### Steps

Complete the following steps to customize the labels and messages seeded in FND\_NEW\_MESSAGES:

1. Log on to Forms.
2. Select the Application Developer responsibility
3. Select `Application > Messages Function`.
4. Search for messages starting with the CSMW prefix.
5. Message text can then be replaced for corresponding message.

For Oracle Mobile Field Service/Laptop, all labels are stored in AK Data. Use the application developer responsibility to change labels.

## Generic Attachment Support

Attachments can be used for a variety of purposes, such as maps, driving directions, and product reference images.

### Attachment Support

Oracle Mobile Field Service supports the download and display of attachments at a particular entity level.

The following entities have attachment-download. Multiple attachments are allowed on each entity.

- Service Request
- Task

The CSM: Maximum Attachment Size profile controls the maximum amount of

attachment data to be downloaded.

The maximum attachment size in mega bytes is specified by the profile value.

If a single file exceeds the profile value, it will not be downloaded. For multiple files, the first n files, which are altogether less than the profile value, will be downloaded.

### **Steps**

Complete the following steps to download the attachment:

1. In Forms, create an attachment on a service request or task.
2. Run JTM Concurrent Program: Lookup.
3. Synchronize.

Run the lookup program each time an attachment is added or changed. The new attachment will come down if attached after the last run of the lookup program.

## **Attachment Display For Oracle Mobile Field Service/Laptop**

There is an attachment button on the service request and task screens for attachments.

Each attachment link points to a JSP page in order to return the data read from the attachments table.

Since the application is running in Internet Explorer, this browser renders the contents of the file.

## **Attachment Display for Oracle Mobile Field Service/Pocket PC**

There is a button on the service request and task screens that opens a list of attachments.

Click on the attachment link to retrieve the data from the attachments table and to save it on the file system with the appropriate file name and extension. Clicking on this link will also open the file in Internet Explorer.

## **Writing New Custom Screens**

This section summarizes how to customize the application. The details are provided in *OracleMetaLink* Note: 248063.1

You can develop new screens based on new and existing features. You can also download additional data in some cases. You can also download additional attachments.

You can implement such features in custom screens:

- Maps and driving directions
- Custom invoicing support

- Knowledge base through attachments

In order to write custom screens for an Oracle Mobile Field Service application, you first need to do the following:

1. Identify what you want to build and from which screen on the laptop computer or the Pocket PC from which you want the custom screen to flow.
2. Data replication support:
  - Identify additional data to be downloaded.
  - Design the data model for a custom module and then identify the Oracle dummy application table(s) that should be replicated.
  - Place all additional data into the seven custom dummy tables, which are packaged into apps\_custom.odb.
  - Synchronize data to the mobile computer device.
3. Identify additional screens to be designed and then develop the custom module of the mobile application.
  - For the laptop computer, this is a set of JSPs
  - For the Pocket PC, this is a C++ executable
  - All additional screens are packaged into <custom>.app
4. Create the wrappers on the server side to process upward sync data.
5. Test the application package and then deploy it.

The custom data and application are packaged separately from the Oracle Mobile Field Service application. This arrangement allows the Oracle Mobile Field Service application to be transparent to upgrades.

---

# Index

## A

---

- ActiveSync 3.6, 2-2
- AD Utilities Reference Guide, 3-3
- AD utility, 4-2, 4-2
- Advanced tab, 7-4
- Apache, 1-14, 7-7
- Apache listener, 8-26
- Application modules
  - Oracle Application Foundation components, 1-3
  - Oracle Install Base, 1-3
- asgovars.cmd, 3-4
- asgovars.env, 3-3, E-1

## B

---

- Basic tab, 7-4
- Bypass Proxy for Local Addresses check box, A-3

## C

---

- check boxes
  - Bypass Proxy for Local Addresses, A-3
  - User, D-1
- Computer Telephone Integration (CTI), 1-16
- CRM System Administrator Console, 7-1, 7-3, 7-7
- CRM Technical Foundation, 7-6
- CSE profiles
  - Bypass Event Queue, B-4
  - Miscellaneous Issue to Project Transaction Type, B-4
  - Miscellaneous Receipt From Project Transaction Type, B-4

- PA Expenditure Type, B-4
- CSF profiles
  - Business Process, 4-14
  - default commit task status, 4-10
  - default debrief business process, 4-9
  - default debrief service activity code, 4-9
  - default distance unit, 4-9, 4-10
  - Default In Planning Status, 4-4, 4-15
  - default return reason (for material debrief), 4-10
  - default task type for personal tasks, 4-10, 4-10
  - Prevent Overlapping Debrief Lines, 4-15
  - The unit of measure for hours, 4-9
  - The unit of measure for minutes, 4-9
  - Update Planned/Scheduled Times Allowed, 4-14
- CSFW profiles
  - planned task window, 4-10
- CSL profiles
  - Item Category Filter, B-2
  - Item Category Set Filter, B-2
- CSM profiles
  - Enable Create SR, 4-11
  - Enable Create Task, 4-11
  - Enable Update Task Assignment Status, 4-11
  - Enable View Customer Product, 4-11
  - Item Category Filter, 4-13, B-2
  - Item Category Set Filter, 4-13, B-2
  - Labor Line Total Check, 4-8
  - Notifications Scope , 4-15
  - Number of IB Items at Location, 4-14
  - Number of Previously Closed Service Requests, 4-13

- Purge Interval (Days), 4-9
- Restrict Number of Items to Search for in LOV, 4-11
- Synchronous Service History Collection, 4-13
- Time Reasonability Check Apply, 4-7
- CSM TYPE3 processes, 4-18
- CTI, 1-16

---

## D

- Diagnostics Framework, 7-4
- Diagnostics tab, 7-3

---

## E

- enterprise system, 4-19

---

## F

- fast synchronization, F-11
- Fieldservice.exe, A-14
- Field Service Administrator responsibility, B-5
- Field Service Dispatch Center, 4-20
- Field Service Manager responsibility, 4-3, B-3
- field service representative (FSR), 1-15
- File Explorer icon, A-14
- files
  - asgovars.env, E-1
  - Fieldservice.exe, A-14
- forms
  - Resource Addresses and Subinventories, B-5
- Forms application, 4-5, 7-3, B-3
  - Inventory tab page, B-3
  - Service tab page, B-3
- FSR, 1-15

---

## G

- guides
  - AD Utilities Reference Guide, 3-3
  - Installing Oracle Applications, 2-1, 2-2
  - Mobile Applications: Patch Information document, 2-3, 4-2
  - Oracle10g Lite Installation and Configuration Guide Release 10.2.0.2, 3-1
  - Oracle9i Lite Mobile Server Administration Guide, 8-26
  - Oracle9i Lite Mobile Server Administration Guide, Release 5.0.2, 7-7

- Oracle Applications CRM System Administrator's Guide, 7-1, 7-4, 7-7
- Oracle Applications System Administrator Guide, 3-11
- Oracle Applications System Administrator's Guide, 4-17, 4-19
- Oracle Database Lite 10g Installation and Configuration Guide Release 2, 3-2
- Oracle Field Service Implementation Guide, 1-2, 4-4, 4-19, B-5
- Oracle TeleService Implementation Guide, 4-3, 4-3, 4-5

---

## H

- history, service, 1-8
- HTTP listener, 1-14
- HZ profiles
  - Reference Language, 4-17
  - Reference Territory, 4-16, 4-17

---

## I

- icons
  - File Explorer, A-14
  - Web-to-Go, A-7
- ICX profiles
  - Date format mask, 4-16
  - Language, D-1, D-1, D-1
  - Numeric characters, 4-16
- incremental synchronization, F-11
- initial synchronization, F-11
- Input Material Debrief Using Voice, 6-1
  - setup, 6-1
- Installed Base Admin responsibility, B-4
- Installing Oracle Applications, 2-1, 2-2
- Interapplication Bar, 8-3
- Internet Explorer, A-2
- Inventory tab page, B-3

---

## J

- Java post-install program, E-3
- JDK 1.3.1, E-1
- JTM Master Concurrent Program, 4-17
- JTM profiles
  - Application Conflict Rule, 4-13, 8-2
  - Master Concurrent Program, 4-18

Mobile Applications Enabled, 4-12  
TimePicker Format (HH24/HH12), 4-16  
JTT Logging Framework, E-4

---

## K

knowledge base, 1-16

---

## L

logging screens, 7-7

---

## M

Manage Mobile Users concurrent program, D-1, D-2, D-2  
MANAGE MOBILE USERS concurrent program, E-1  
Master Organization, B-3  
Microsoft Internet Explorer, A-3  
MOBILE\_CON\_PROGRAM, 4-17  
Mobile Administrator responsibility, D-1  
Mobile Application Foundation, 4-19  
Mobile Application Foundation Administration Console, 8-16, 8-17, 8-18, 8-24, E-3  
Mobile Application Foundation Console, 8-3  
Mobile Applications: Patch Information document, 2-3, 4-2  
Mobile Client for Web-to-Go setup program, A-2  
mobile server, A-1  
Mobile Server Repository, 3-8  
mSync Client, 1-15

---

## N

National Language Support (NLS), D-1  
network file sharing (NFS), E-5  
NFS, E-5  
NLS, D-1  
null synchronization, F-11

---

## O

operating systems  
Pocket PC 2002, 2-2, 2-3  
Pocket PC 2003, 2-2, 2-3  
Windows 2000, 2-2  
Windows ME, 2-2  
Windows NT 4.0 (Service Pack 5), 2-2  
Windows XP, 2-2

Oracle10g Lite Installation and Configuration Guide Release 10.2.0.2, 3-1  
Oracle10g Lite patches 10.2.0.2 , 3-2  
Oracle11i database, 1-15  
Oracle9i Lite database, 1-15, A-1  
Oracle9i Lite mobile server, 1-1  
Oracle9i Lite Mobile Server Administration Guide, 8-26  
Oracle9i Lite Mobile Server Administration Guide Release 5.0.2, 7-7  
Oracle9i Lite mobile server repository, E-3  
Oracle Applications, 3-1  
Oracle Applications CRM System Administratorxd5 s Guide, 7-1, 7-4, 7-7  
Oracle Applications System Administrator Guide, 3-11  
Oracle Applications System Administratorxd5 s Guide, 4-17, 4-19  
Oracle CRM Gateway for Mobile Devices, 1-1  
Oracle Database Lite 10g Installation and Configuration Guide Release 2, 3-2  
Oracle Diagnostics for Applications, 7-1  
Oracle E-Business Suite, 1-15, 2-1, D-1  
Oracle Field Service/Laptop responsibility, 4-12, 4-19, 4-19, 4-19, 4-20, 4-20  
Oracle Field Service/Palm responsibility, 4-19, 4-19, 4-19, 4-20, 4-20, 4-20, 4-21, 7-3  
Oracle Field Service Implementation Guide, 1-2, 4-4, 4-4, 4-19, B-5  
Oracle Field Service Report, definition of, 4-4  
Oracle Field Service set of applications, 1-15  
OracleMetaLink, 2-3  
Oracle Metalink, 3-2  
OracleMetaLink Notes  
130091.1, E-1  
219019.1, 4-19  
241425.1, 2-3, 4-2  
248063.1, 1-10, G-5  
Oracle Support, 7-8  
Oracle Technology Network (OTN), 3-2  
Oracle TeleService Implementation Guide, 4-3, 4-3, 4-5

---

## P

Pentium I processor, 2-3  
Performance Monitor, F-12

Pocket PC 2002, 2-2, 2-3  
 Pocket PC 2003, 2-2, 2-3  
 profile options  
   JTM: Mobile Applications Enabled, 3-11  
 Profile Options  
   ASG: Auto Upgrade All Users, 3-9  
   ASG: Enable Mobile User, 3-10  
   CSF: Default Planned task status for planned task, 5-18  
   CSF: Default Working Task Status, 5-18  
   CSFW: Task Max, 5-18  
   CSFW: Technicians Schedulable Options task, 5-18  
   CSFW: Use Icons for buttons, 5-10  
   CSFW: Voice Install Service Activity Code, 6-1  
   Csfw: Voice Item Type, 6-1  
   Csfw: Voice Parent Product Type, 6-1  
   Csfw: Voice Recovered Product Type, 6-1  
   CSFW: Voice Return Service Activity Code, 6-1  
   Csfw: Voice Serial Number Type, 6-1  
   CSM: Maximum Attachment Size, 4-12  
   JTM: Application Conflict Rule, 3-10  
   JTM: Concurrent Program History Level, 3-11  
   JTM: Time Picker Format (HH12), 3-11  
 profiles  
   Client Timezone, 4-15  
   CSE:  
     Bypass Event Queue, B-4  
     Miscellaneous Issue to Project  
     Transaction Type, B-4  
     Miscellaneous Receipt From Project  
     Transaction Type, B-4  
     PA Expenditure Type, B-4  
   CSF:  
     Business Process, 4-14  
     default commit task status, 4-10  
     default debrief business process, 4-9  
     default debrief service activity code, 4-9  
     default distance unit, 4-9, 4-10  
     Default In Planning Status, 4-4, 4-15  
     default return reason (for material debrief), 4-10  
     default task type for personal tasks, 4-10, 4-10  
     Prevent Overlapping Debrief Lines, 4-15  
     The unit of measure for hours, 4-9  
     The unit of measure for minutes, 4-9  
     Update Planned/Scheduled Times Allowed, 4-14  
   CSFW:  
     planned task window, 4-10  
   CSL:  
     Item Category Filter, B-2  
     Item Category Set Filter, B-2  
   CSM:  
     enable create SR, 4-11  
     enable create task, 4-11  
     enable update task assignment status, 4-11  
     enable view customer product, 4-11  
     Item Category Filter, 4-13, B-2  
     Item Category Set Filter, 4-13, B-2  
     Labor Line Total Check, 4-8  
     notifications scope, 4-15  
     Number of IB Items at Location, 4-14  
     Number of Previously Closed Service Requests, 4-13  
     Purge Interval (Days), 4-9  
     Restrict Number of Items to Search for in LOV, 4-11  
     Synchronous Service History Collection, 4-13  
     Time Reasonability Check Apply, 4-7  
   HZ:  
     reference language, 4-17  
     reference territory, 4-16, 4-17  
   ICX:  
     Date format mask, 4-16  
     Language, D-1, D-1, D-1  
     numeric characters, 4-16  
   JTM:  
     Application Conflict Rule, 4-13, 8-2  
     Master Concurrent Program, 4-18  
     Mobile Applications Enabled, 4-12  
     TimePicker Format (HH24/HH12), 4-16  
 Server Timezone, 4-16  
 Service:  
   inventory validation organization, 4-15  
   Inventory Validation Organization, 1-9, B-1  
 Task Manager:  
   default assignee task status, 4-16  
   owner type for a task, 4-16



Time unit of measure class, 4-16

## **R**

---

R12 Oracle Applications Rapid Install, 3-1

Resource Addresses and Subinventories form, B-5

Resource Manager, 1-3

responsibilities

- Field Service Administrator, B-5

- Field Service Manager, 4-3, B-3

- Installed Base Admin, B-4

- Mobile Administrator, D-1

- Oracle Field Service/Laptop, 4-12, 4-19, 4-19, 4-19, 4-20, 4-20

- Oracle Field Service/Palm, 4-19, 4-19, 4-19, 4-20, 4-20, 4-20, 4-21, 7-3

- System Administrator, D-1

## **S**

---

SAR command, F-12

SDK, 1-10

service history, 1-8

Service profiles

- Inventory Validation Organization, 1-9, 4-15, B-1

Service tab page, B-3

setup.exe, A-2

Software Development Kit (SDK), 1-10

Start menu, A-7

synchronization, F-11

synchronizations

- incremental, F-11

- initial, F-11

- null, F-11

system administrator, 7-3, 7-7

System Administrator responsibility, D-1

## **T**

---

tabs

- Advanced, 7-4

- Basic, 7-4

- Diagnostics, 7-3

Task Manager, 1-3

Task Manager profiles

- Default assignee status, 4-16

Owner type for a task, 4-16

Task Scheduling and Assignment, 5-18

Test Summary table, 7-3

## **U**

---

Update Installed Base check box, B-4

User check box, D-1

## **W**

---

webtogo.ora, 3-8, E-4, E-5, E-5

webtogo.ora file, E-3

Web-to-Go icon, A-7

Web-to-Go server, 1-11, 1-12, 1-15, A-1

Windows 2000, 2-2

Windows Explorer, A-2

Windows ME, 2-2

Windows NT 4.0 (Service Pack 5), 2-2

Windows XP, 2-2

Workflow Background Process, 4-18

