

**Oracle® Retail Merchandising**

Batch Schedule

Release 13.0.3.6

March 2010

Oracle® Retail Merchandising Batch Schedule, Release 13.0.3.6

Copyright® 2010, Oracle and/or its affiliates. All rights reserved.

Primary Author: Nathan Young

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this software or related documentation is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation shall be subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License (December 2007). Oracle USA, Inc., 500 Oracle Parkway, Redwood City, CA 94065.

This software is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications which may create a risk of personal injury. If you use this software in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure the safe use of this software. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software in dangerous applications.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

This software and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

## Value-Added Reseller (VAR) Language

### Oracle Retail VAR Applications

The following restrictions and provisions only apply to the programs referred to in this section and licensed to you. You acknowledge that the programs may contain third party software (VAR applications) licensed to Oracle. Depending upon your product and its version number, the VAR applications may include:

- (i) the software component known as **ACUMATE** developed and licensed by Lucent Technologies Inc. of Murray Hill, New Jersey, to Oracle and imbedded in the Oracle Retail Predictive Application Server – Enterprise Engine, Oracle Retail Category Management, Oracle Retail Item Planning, Oracle Retail Merchandise Financial Planning, Oracle Retail Advanced Inventory Planning, Oracle Retail Demand Forecasting, Oracle Retail Regular Price Optimization, Oracle Retail Size Profile Optimization, Oracle Retail Replenishment Optimization applications.
- (ii) the **MicroStrategy** Components developed and licensed by MicroStrategy Services Corporation (MicroStrategy) of McLean, Virginia to Oracle and imbedded in the MicroStrategy for Oracle Retail Data Warehouse and MicroStrategy for Oracle Retail Planning & Optimization applications.
- (iii) the **SeeBeyond** component developed and licensed by Sun Microsystems, Inc. (Sun) of Santa Clara, California, to Oracle and imbedded in the Oracle Retail Integration Bus application.
- (iv) the **Wavelink** component developed and licensed by Wavelink Corporation (Wavelink) of Kirkland, Washington, to Oracle and imbedded in Oracle Retail Mobile Store Inventory Management.
- (v) the software component known as **Crystal Enterprise Professional and/or Crystal Reports Professional** licensed by SAP and imbedded in Oracle Retail Store Inventory Management.
- (vi) the software component known as **Access Via™** licensed by Access Via of Seattle, Washington, and imbedded in Oracle Retail Signs and Oracle Retail Labels and Tags.
- (vii) the software component known as **Adobe Flex™** licensed by Adobe Systems Incorporated of San Jose, California, and imbedded in Oracle Retail Promotion Planning & Optimization application.
- (viii) the software component known as **Style Report™** developed and licensed by InetSoft Technology Corp. of Piscataway, New Jersey, to Oracle and imbedded in the Oracle Retail Value Chain Collaboration application.
- (ix) the software component known as **DataBeacon™** developed and licensed by Cognos Incorporated of Ottawa, Ontario, Canada, to Oracle and imbedded in the Oracle Retail Value Chain Collaboration application.

You acknowledge and confirm that Oracle grants you use of only the object code of the VAR Applications. Oracle will not deliver source code to the VAR Applications to you. Notwithstanding any other term or condition of the agreement and this ordering document, you shall not cause or permit alteration of any VAR Applications. For purposes of this section, “alteration” refers to all alterations, translations, upgrades, enhancements, customizations or modifications of all or any portion of the VAR Applications including all reconfigurations, reassembly or reverse assembly, re-engineering or reverse engineering and recompilations or reverse compilations of the VAR Applications or any derivatives of the VAR Applications. You acknowledge that it shall be a breach of the agreement to utilize the relationship, and/or confidential information of the VAR Applications for purposes of competitive discovery.

The VAR Applications contain trade secrets of Oracle and Oracle’s licensors and Customer shall not attempt, cause, or permit the alteration, decompilation, reverse engineering, disassembly or other reduction of the VAR Applications to a human perceivable form. Oracle reserves the right to replace, with functional equivalent software, any of the VAR Applications in future releases of the applicable program.



---

---

# Contents

<b>Send Us Your Comments</b> .....	<b>vii</b>
<b>Preface</b> .....	<b>ix</b>
Audience .....	ix
Related Documents.....	ix
Customer Support.....	ix
Review Patch Documentation.....	x
Oracle Retail Documentation on the Oracle Technology Network.....	x
Conventions.....	x
<b>1 Introduction to Merchandising Batch Processing</b> .....	<b>1</b>
Batch Processing.....	1
Types of Batch Programs .....	1
Batch Window .....	2
Batch Schedule and Phases.....	2
Merchandising Batch Schedule .....	3
Program List .....	3
Batch Schedule Diagram .....	5
RMS, ReIM, RTM Section .....	5
ReSA Section.....	6
RPM Section.....	6
Notations in the Batch Schedule Diagram.....	7
prepost Program .....	8
Modifications to the Batch Schedule .....	9
<b>2 Program List</b> .....	<b>11</b>
<b>3 Batch Schedule Diagram</b> .....	<b>17</b>
<b>4 Interface Diagrams for RMS and RPAS</b> .....	<b>19</b>
RMS Pre/Post Extract Diagrams .....	20
RMS Foundation Data Extract Diagrams .....	21
RMS Fact Data Extract Diagrams.....	23
RPAS-RMS Fact Load Diagram .....	24
<b>5 Interface Diagrams for RMS and RDW</b> .....	<b>25</b>
<b>6 Interface Diagram for RPM and RDW</b> .....	<b>37</b>
<b>7 Interface Diagram for ReIM and RDW</b> .....	<b>39</b>
<b>8 Interface Diagrams for RMS and AIP</b> .....	<b>41</b>
RMS Pre/Post Extract Diagrams .....	42
RMS Foundation Data Extract Diagrams .....	43



---

---

# Send Us Your Comments

Oracle Retail Merchandising, Batch Schedule, Release 13.0.3.6

Oracle welcomes customers' comments and suggestions on the quality and usefulness of this document.

Your feedback is important, and helps us to best meet your needs as a user of our products. For example:

- Are the implementation steps correct and complete?
- Did you understand the context of the procedures?
- Did you find any errors in the information?
- Does the structure of the information help you with your tasks?
- Do you need different information or graphics? If so, where, and in what format?
- Are the examples correct? Do you need more examples?

If you find any errors or have any other suggestions for improvement, then please tell us your name, the name of the company who has licensed our products, the title and part number of the documentation and the chapter, section, and page number (if available).

---

**Note:** Before sending us your comments, you might like to check that you have the latest version of the document and if any concerns are already addressed. To do this, access the new Applications Release Online Documentation CD available on My Oracle Support and [www.oracle.com](http://www.oracle.com). It contains the most current Documentation Library plus all documents revised or released recently.

---

Send your comments to us using the electronic mail address: [retail-doc\\_us@oracle.com](mailto:retail-doc_us@oracle.com)

Please give your name, address, electronic mail address, and telephone number (optional).

If you need assistance with Oracle software, then please contact your support representative or Oracle Support Services.

If you require training or instruction in using Oracle software, then please contact your Oracle local office and inquire about our Oracle University offerings. A list of Oracle offices is available on our Web site at [www.oracle.com](http://www.oracle.com).





---

---

# Preface

This batch schedule document details the integrated cyclical processing schedules for the Oracle Retail Merchandising applications:

- Oracle Retail Merchandising System (RMS)
- Oracle Retail Invoice Matching (ReIM)
- Oracle Retail Price Management (RPM)
- Oracle Retail Sales Audit (ReSA)
- Oracle Retail Trade Management (RTM)
- Oracle Retail Allocation

---

---

**Note:** Although Oracle Retail Allocation is a Merchandising application, it is not represented in this batch schedule because it does not have any batch programs to run. All Allocation processing is online processing.

---

---

This guide describes the periodic and ad hoc phases of batch processing, as well as pre- and post-processing dependencies.

## Audience

The audiences for this guide are as follows:

- Systems analysts and system operations personnel who need information about Merchandising processes, internally or in relation to systems across the enterprise
- Integrators and implementation staff who have the overall responsibility for implementing the Merchandising applications in their enterprise

## Related Documents

For more information, see the following documents for the Oracle Retail Merchandising products:

- *Oracle Retail Invoice Matching Operations Guide*
- *Oracle Retail Merchandising System Operations Guide*
- *Oracle Retail Price Management Operations Guide*

## Customer Support

To contact Oracle Customer Support, access My Oracle Support at the following URL:

<https://support.oracle.com>

When contacting Customer Support, please provide the following:

- Product version and program/module name
- Functional and technical description of the problem (include business impact)
- Detailed step-by-step instructions to re-create
- Exact error message received
- Screen shots of each step you take

---

## Review Patch Documentation

When you install the application for the first time, you install either a base release (for example, 13.1) or a later patch release (for example, 13.1.2). If you are installing the base release and additional patch and bundled hot fix releases, read the documentation for all releases that have occurred since the base release before you begin installation.

Documentation for patch and bundled hot fix releases can contain critical information related to the base release, as well as information about code changes since the base release.

## Oracle Retail Documentation on the Oracle Technology Network

Documentation is packaged with each Oracle Retail product release. Oracle Retail product documentation is also available on the following Web site:

[http://www.oracle.com/technology/documentation/oracle\\_retail.html](http://www.oracle.com/technology/documentation/oracle_retail.html)

(Data Model documents are not available through Oracle Technology Network. These documents are packaged with released code, or you can obtain them through My Oracle Support.)

Documentation should be available on this Web site within a month after a product release.

## Conventions

**Navigate:** This is a navigate statement. It tells you how to get to the start of the procedure and ends with a screen shot of the starting point and the statement “the Window Name window opens.”

This is a code sample

It is used to display examples of code

---

---

# Introduction to Merchandising Batch Processing

This chapter is a brief introduction to Oracle Retail batch processing. It defines basic terms and concepts, describes batch processing phases, and explains how to interpret the batch schedule diagram and program list.

## Batch Processing

Batch processing is the execution of a group of batch programs (jobs). The results are returned without user intervention. Batch programs are commonly used for the following reasons:

- To process large volumes of transaction data
- To interface with external systems
- To perform internal maintenance

Batch programs can process very large quantities of data quickly and efficiently. Batch programs can perform some updates that could be performed through online transactions, but much more quickly and with less impact on system performance. Batch processing is usually scheduled for times when systems are idle or least busy.

Batch programs can be run automatically using batch scheduler software. The batch scheduler allows batch jobs to be set up in a specific order, with restrictions attached to any program as needed. If an error occurs with a batch program, an administrator must correct the error and manually rerun the batch program that failed.

## Types of Batch Programs

Oracle Retail batch programs are of several types:

- Upload programs bring data from external systems into the Oracle Retail database. For example, the `posupld` program uploads daily transactions that occur at the point of sale (POS) for processing by the Oracle Retail Management System (RMS).
- Download programs extract data from RMS and format it so it can be used by external systems. For example, the `posdnld` program extracts new and changed information about an item/location for downloading to the point of sale.
- System maintenance programs perform tasks such as updating the system date. For example, the `dtesys` program increments the system date at the end of each batch cycle.
- Functional maintenance programs process data specific to a functional area. For example, the `storeadd` program updates a number of tables to create entries for a new store.

## Batch Window

Because of the impact on production systems, it is not always possible to run batch programs during business hours; however, there is a window of opportunity during each day or night when online systems are not being used. This time frame is the *batch window*. For example, a retailer with stores throughout the continental U.S. might require its online systems to be available from 8 AM Eastern Standard Time, when its East Coast offices open, until 9 PM Pacific Standard Time, when its West Coast stores close. This allows an eight-hour batch window for processing all batch jobs.

## Batch Schedule and Phases

Order is critical when running batch programs. Some tasks need to be performed before others. A batch schedule ensures that every time batch processing is performed, the correct tasks are performed in the proper order.

The batch schedule is a diagram that represents all batch programs and how they are sequenced. For each individual user, the schedule is a suggested starting point for the installation. Some programs are specific to products that may not be installed, so these programs may not be used at all.

The total batch schedule is divided into phases. Each phase must be completed before the next phase can begin. Within a phase, there may also be programs that depend on the completion of another program within that phase, so programs within each phase may need to be run in a particular order.

## Merchandising Batch Schedule

The integrated Merchandising batch schedule combines the batch schedules of all Merchandising applications into a single schedule diagram. The diagram (later in this document) shows the batch dependencies among the Merchandising applications.

The integrated Merchandising batch schedule combines the batch modules for the following applications:

- Oracle Retail Merchandising System (RMS)
- Oracle Retail Trade Management (RTM)
- Oracle Retail Sales Audit (ReSA)
- Oracle Retail Invoice Matching (ReIM)
- Oracle Retail Price Management (RPM)

---

**Note:** Although Oracle Retail Allocation is a Merchandising application, it is not represented in this batch schedule because it does not have any batch programs to run. All Allocation processing is online processing.

---

## Program List

The columns of the program list provide details about each batch program, as follows:

Column	Description
Program name	Name of the program or script
Functional area	Functional area of the application for which the batch program is run
Threaded	Whether the program is threaded (Y/N)
Driver	Program driver
Phase	Phase during which the program is run (see the batch schedule diagram)
Pre-dependency	Programs that must be completed before the program can be run
Post-dependency	Programs that must be run after the program completes successfully
Timing	How often the program is run (for example, daily, weekly, monthly, ad hoc)
Restart/Recovery	Whether the program uses restart/recovery (R=Yes, N=No)
Run Parameters for Program	Command syntax to run the program

For example, the following shows the information in the program list about an RMS phase 3 program named dealday:

Program Name	dealday
Functional Area	Deals
Threaded	Y
Driver	Location
Phase	3
Pre-dependency	dealinc, dealfinc, prepost dealday pre
Post-dependency	prepost dealday post, salmnth
Timing	Monthly
Restart/Recovery	R
Usage	dealday userid/passwd

The program list is grouped in the following order:

- RMS, RTM, and ReSA programs
- RPM programs
- ReIM programs
- RMS extracts for Retail Predictive Application Server (RPAS)
- RMS extracts for Retail Data Warehouse (RDW)

The extracts for RPAS and RDW are programs that are part of the RMS application.

## Batch Schedule Diagram

The batch schedule diagram illustrates the program list pre- and post-dependency details. The layout and notations of the diagram also illustrate required sequences and other processing details. Executing the Merchandising batch processing in the manner diagrammed ensures that all critical dependencies are met.

For ease of setting up a schedule at client site, and also based on logical application dependencies, the diagram is divided into three main sections:

- RMS, RTM, ReIM
- ReSA
- RPM

Later chapters of this document show data flow diagrams for other batch processes:

- Chapter 4 shows the Retail Extract, Transform, and Load (RETL) data flows for the extracts from RMS to RPAS.
- Chapter 5 shows the RETL dimension and fact data flows for the extracts from RMS to Oracle Retail Data Warehouse (RDW).
- Chapter 6 shows the RETL data flow for the Promotion dimension extract from RPM to RDW.
- Chapter 7 shows the RETL data flow for the Supplier Invoice Cost dimension extract from ReIM to RDW.
- Chapter 8 shows the RETL data flows for the extracts from RMS to Oracle Retail Advanced Inventory Planning (AIP).

### RMS, ReIM, RTM Section

The first section diagrams the RMS, ReIM, and RTM programs and their dependencies. This section is further divided into phases 0 through 7, ad hoc, and date set batch.


Each phase must be completed before the next phase can begin. Also, a phase may contain programs that depend on other programs within the phase. Programs within each phase may need to run in a particular sequence.

The following are brief descriptions of the Merchandising batch processing phases. Depending on your implementation, some programs and phases may not apply.

Phase	Description
Phase 0	The first phase performs essential table maintenance including: <ul style="list-style-type: none"> <li>▪ Daily purges</li> <li>▪ Updates to currency exchange rates</li> <li>▪ Updates to value-added tax (VAT) data</li> </ul>
Phase 1	This phase prepares the tables for interfacing with external systems in Phase 2. Among other programs, the stock variance (stkvar) batch program is run to update stock counts.
Phase 2	During this phase, information is uploaded from external interfaces, including point of sale (POS) data (posupld batch program).
Phase 3	In this phase, the main RMS processing programs are run for purchasing, ordering, stock ledger, deals, and replenishment.

Phase	Description
Phase 4	This phase pushes data to external sources. Changed system information is rebuilt. Open to buy (OTB) data is updated. Information is sent to the forecasting system.
Phase 5	This phase consists of ReIM process upload programs.
Phase 6	This phase consists of ReIM process roll-up programs.
Phase 7	This phase consists of ReIM process download programs.
Ad Hoc	Ad hoc batch programs can be run at any time. The ad hoc programs have no phase dependencies.
Date Set	The Date Set phase increments the system date and updates other calendar dates. <b>Note:</b> The date set phase should be the very last phase to run. Even the ad hoc programs should be run before the date set program.

Read the batch schedule diagram from left to right. In the following example, any of the programs (ediupavl, ediupack, stkvar, ditinsrt, lifstkup, ReceiverAdjustment, DiscrepancyPurge) can start at the same time; however, the stkupld program cannot start until the lifstkup program is successfully completed.

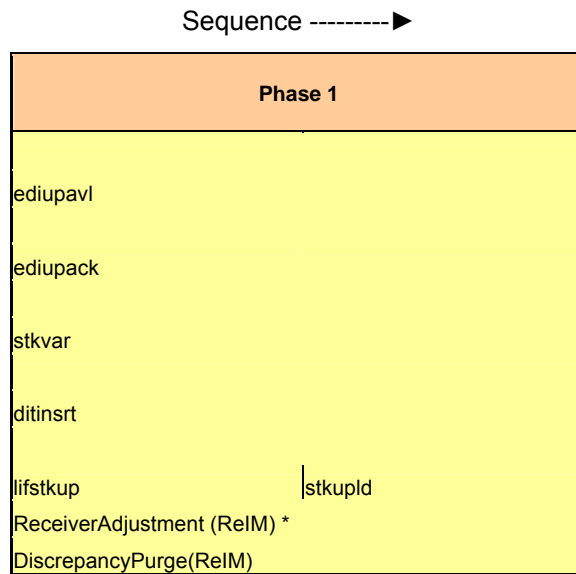

### ReSA Section

This section diagrams the ReSA programs and their dependencies.

### RPM Section

This section diagrams the RPM programs and their dependencies.



## Notations in the Batch Schedule Diagram

### Pipes

Pipes are vertical bars ( | ) that represent the dependencies within a phase. Reading left to right, a pipe indicates that one or more programs to the right depend upon completion of one or more programs to the left.

In the following example, the stkupld module depends on the lifstkup module; that is, the stkupld module can be run only after successful completion of the lifstkup module.

lifstkup	stkupld
----------	---------

In the following example, both of the modules cntrordb and reqext are dependent on ociroq. Neither cntrordb nor reqext can be run until the ociroq module has completed successfully.

ociroq	cntrordb reqext
--------	--------------------

In the following example, the ibcalc module is dependent on both ibexpl and cntrprss. The ibcalc module cannot be run until both ibexpl and cntrprss have completed successfully.

ibexpl cntrprss	ibcalc
--------------------	--------

### Abbreviations

In the diagram, abbreviations in parentheses that follow program names have the following meanings:

Abbreviation	Meaning
(perl)	The module is a Perl script.
(FIF)	The module is related to the Financials application.
(sqlldr)	There is a sqlloader process to load/ftp the output files.
(rebuild all)	There is a rebuild process inside the application.
(IM)	The module is related to Invoice Matching but owned by RMS.
(RMS)	The module belongs to RMS.
<b>(RMS)</b>	(Bold type) The RMS module is executed externally to that phase.
(ReSA)	The module belongs to ReSA.
<b>(ReSA)</b>	(Bold type) The ReSA module is executed externally to that phase.
(ReIM)	The module belongs to ReIM.
(RTM)	The module belongs to RTM.
(Weekly)	The module is executed weekly.
(Monthly)	The module is executed monthly.
(Forms Auditing)	This is an online forms auditing process related to ReSA.

### Footnotes

Footnote symbols (\*, \*\*, †, ‡) refer to footnotes that appear below that phase or section of the diagram.

## prepost Program

The prepost program facilitates multi-threading by allowing general system administration functions (such as table deletions or mass updates) to be completed after all threads of a particular program have been processed. The prepost program must be run before, after, or both before and after, programs that require specific processing to run or complete successfully.

In the batch schedule diagram, the prepost program is indicated by “pre” and “post” entries, as in the following examples.

In the following example, preprocessing is required before running the ociroq program.

<b>pre</b>	<b>ociroq</b>
------------	---------------

In the following example, preprocessing is required before running the stkupd program. Also, post-processing is required after successful completion of the stkupd program.

<b>pre</b>	<b>stkupd</b>	<b>post</b>
------------	---------------	-------------

In the following example, post-processing is required after successful completion of the sccest program.

<b>sccest</b>	<b>post</b>
---------------	-------------

## Modifications to the Batch Schedule

The integrated Merchandising batch schedule shows the dependencies for all the programs that *could* be run by a retailer. Based on many factors, there will always be some programs that a retailer does not run. Determining which programs, or groups of programs, are not required is a job that should be performed at implementation time.

One major factor involves the applications that the retailer has purchased and wants to install:

- For example, a retailer may have purchased RMS, but not ReIM; in this case, the ReIM programs would not be run.
- Another example is that a retailer may not want to use some functionality within an application. Perhaps a retailer purchased RMS but did not purchase the RDW application. In this case, the retailer may not want to run the programs that extract RMS data to be used later by the RDW application.

These major configuration choices also affect whether some programs are used:

- Whether the Retail Integration Bus (RIB) is used  
For more information about configuring the RIB for Merchandising applications, see “Configuring RPM without the RIB” in the “Backend System Administration and Configuration” chapter of the *Oracle Retail Price Management Operations Guide*.
- Whether full-featured or simplified Retail Price Management (RPM) is used  
For more information about configuring simplified RPM, see the “Backend System Administration and Configuration” chapter in the *Oracle Retail Price Management Operations Guide*.
- Whether full-featured or simplified RTM is used  
For more information about configuring simplified RTM, see the “Oracle Retail Trade Management Batch” chapter in Volume 1 of the *Oracle Retail Merchandising System Operations Guide*.



**RMS,RTM,ReSA Program Dependency and Scheduling Details**

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
auditprg	Audit	N	N/A	ad hoc	N/A	N/A	daily	N	auditprg user/passwd
auditsys	Audit	N	N/A	ad hoc	N/A	N/A	daily	N	auditsys user/passwd
batch_orpos_extract.ksh	Point of Sale Interface	Y	Store	4	If RPM pricing info is reqd then run after extraction script	postosndid (only if generic POS extract is used)	daily	N	batch_orpos_extract.ksh user/passwd [-p <no. of threads>] [DIR - location where extracts are to be generated]
ccprg	Costing	N	N/A	ad hoc	RPMtoORPOSPublishExport.sh	prepost posctndid post	monthly	N	ccprg user/passwd
cednid	Trade Management	Y	Broker	2	N/A	N/A	daily	R	cednid user/passwd broker_file_name
cmprpg	Pricing	N	N/A	ad hoc	N/A	N/A	daily	N	cmprpg user/passwd
cmprgpid	Pricing	N	N/A	ad hoc	N/A	N/A	ad hoc	R	cmprgpid user/passwd input_file reject_file
cntrmain	Contracting	N	N/A	0	N/A	All RPM batch modules	daily	R	cntrmain user/passwd
cntrorb	Contracting	Y	Contract	3	rpladl	prepost cntrorb post	daily	R	cntrorb user/passwd
cntrpss	Contracting	Y	Dept	3	rplxt	prepost cntrorb post	daily	R	cntrpss user/passwd
costcalc	Deals	Y	Supplier	2	precostcalc	prepost costcalc post	daily	R	costcalc user/passwd supplier (May use the batch_costcalc.ksh for launching this program as it is created based on performance considerations)
cremherdy	Reclassification	N	N/A	4	N/A	recsldy	daily	R	cremherdy user/passwd
deact	Deals	Y	Deal Id	3	prepost deact_nor pre	N/A	daily	R	deact user/passwd
deactd	Deals	N	N/A	3	prepost deact_po pre	N/A	daily	R	deactd user/passwd
dealdy	Deals	Y	Location	3	dealinc	prepost dealdy post	monthly	R	dealdy user/passwd
dealex	Deals	Y	Deal Id	3	prepost deact_nor pre	recsldy	daily	N	dealex user/passwd
dealfct	Deals	Y	Deal Id	3	dealinc	salmtb	daily	R	dealfct user/passwd [Y/N - EOM processing ind]
dealfinc	Deals	Y	Deal Id	3	deact	deact	weekly/ad hoc	R	dealfinc user/passwd
dealinc	Deals	Y	Deal Id	3	prepost dealinc pre	salmtb (if monthly)	monthly	R	dealinc user/passwd [Y/N - EOM processing ind]
dealprg	Deals	N	N/A	ad hoc	N/A	N/A	monthly	R	dealprg user/passwd
dealupid	Deals	Y	File-based	0	(This program is the first one in Deals batch)	(All other deals programs)	daily	R	dealupid user/passwd input_file reject_file
dftrbid	Item Maintenance	Y	Dept	3	(This program will likely be run after sales information is uploaded into Oracle Retail)	(SQL*Load the output file)	daily	R	dftrbid user/passwd outfile
discobappy	OTB	Y	Dept	4	ordscrt	N/A	daily	R	discobappy user/passwd
distrocpub	Pricing/Transfers/Allocation Publish	Y	Store	3	PriceEventExecutionBatch(RPM)	N/A	daily	R	distrocpub user/passwd
dtinsrt	Deals	N	N/A	1	prepost	costcalc	daily	R	dtinsrt user/passwd (P or S) (supplier/partner). Partner or Supplier.
dyprg	Maintenance	N	N/A	0	N/A	ordscrt	daily	N	appropriate calling script and passed into program. Note: (May use the batch_dyprg.ksh for launching this program as it is created based on performance considerations)
docclose	Receiving	N	N/A	ad hoc	N/A	N/A	daily	R	dyprg user/passwd docclose user/passwd
dtesys	Calendar	N	N/A	date_set	(This program should run at the end of the batch cycle)	prepost dtesys post	daily	N	dtesys user/passwd [ndate-YYYYMMDD format]
dumnyin	Receiving	N	N/A	ad hoc	N/A	N/A	daily	N	dumnyin user/passwd
ediladd	Maintenance	N	N/A	ad hoc	N/A	N/A	ad hoc	N	ediladd user/passwd ediladd_output ediladd_catalog
edilcon	Contracting	N	N/A	ad hoc	N/A	N/A	ad hoc	N	edilcon user/passwd edilcon_outfile
edilinv	Invoice Matching	Y	Location	4	N/A	N/A	daily	R	edilinv user/passwd output_filename
edidord	Ordering	N	N/A	4	ordrev	N/A	ad hoc	R	edidord user/passwd filename
edidprd	EDI Interface - Sales and Inventory	N	N/A	4	(and after replenishment batch)	N/A	daily	R	edidprd user/passwd filename
ediprg	EDI Interface - Purge	N	N/A	ad hoc	(Towards the end of the batch cycle)	prepost edidprd post	monthly	R	ediprg user/passwd
edipackd	Maintenance	N	File-based	2	N/A	N/A	daily	N	edipackd user/passwd input_file reject_file
edipack	EDI Interface - ordering	N	N/A	1	N/A	N/A	ad hoc	R	edipack user/passwd data_file reject_file
edupavi	EDI Interface - Contracts	N	File-based	1	N/A	N/A	daily	R	edupavi user/passwd input_file reject_file
edupcat	EDI Interface - Suppliers	N	File-based	ad hoc	N/A	N/A	daily	R	edupcat user/passwd edi_data_file error_file
elcostcalc	Costing	Y	Supplier	ad hoc	N/A	prepost elcostcalc post	ad hoc	R	elcostcalc user/passwd
fcstrpg	Forecasting	Y	Domain Id	ad hoc	prepost fcstrpg pre	prepost fcstrpg post	daily	N	fcstrpg user/passwd domain
fcstrbid	Forecasting	Y	Domain Id	3	N/A	prepost fcstrbid post	weekly	R	fcstrbid user/passwd
fcstrbid_sbc	Forecasting	Y	Domain Id	3	prepost fcstrbid post	N/A	weekly	R	fcstrbid_sbc user/passwd
fflgidn1	Financial Interface	Y	Dept	3	prepost	prepost fflgdn1 post	daily	R	fflgidn1 user/passwd
fflgidn2	Financial Interface	Y	Dept	3	salstage	salapnd	daily	R	fflgidn2 user/passwd
fflgidn3	Financial Interface	Y	Store/Wh	3	salmtb	N/A	monthly	R	fflgidn3 user/passwd
ftmednid	Planning System Interface	N	N/A	ad hoc	N/A	N/A	ad hoc	R	ftmednid user/passwd
gcpuld	Misc Interface - Taxegocode	N	N/A	ad hoc	N/A	N/A	ad hoc	R	gcpuld -username/password@environment> <infile> <outfile>
genpress	Ordering	Y	Supplier	ad hoc	N/A	N/A	ad hoc	R	genpress user/passwd
gradupid	Forecasting	N	File-based	ad hoc	N/A	N/A	ad hoc	R	gradupid user/passwd input_file rej_file
hstbid	Sales	Y	Location	3	posupld	prepost hstbid post	weekly	R	hstbid user/passwd level/weekly/rebuild
hstbid_diff	Sales	N	N/A	ad hoc	hstbid	N/A	ad hoc	N	hstbid_diff user/passwd
hstbidmth	Sales	Y	Dept	3	posupld	prepost hstbidmth post	monthly	R	hstbidmth user/passwd level/monthly/rebuild
hstbidmth_diff	Sales	N	N/A	ad hoc	N/A	prepost hstbid post	ad hoc	N	hstbidmth_diff user/passwd
hstmthupd	Sales	Y	Location	3	(The program should be run on the last day of the month).	(Run SQL*Loader using the control file hstmthupd.ctf to load data from the output file written by HSTMTHUPD.PC for non-existent records on ITEM_LOC_HIST_MTH)	monthly	R	hstmthupd user/passwd (out_file)
hstrpg	Sales	N	N/A	ad hoc	N/A	N/A	monthly	N	hstrpg user/passwd
hstrpg_diff	Sales	N	N/A	ad hoc	N/A	N/A	weekly	N	hstrpg_diff user/passwd
hstwkupd	Sales	Y	Store/Wh	3	N/A	Run SQL*Loader using the control file hstwkupd.ctf to load data from the output file written by HSTWKUPD.PC for non-existent records on ITEM_LOC_HIST	weekly	R	hstwkupd user/passwd (out_file)
htsupld	Trade Management	Y	File-based	ad hoc	Hts240_to_2400 (perl script) Ushs2rms (perl script)	prepost htspuld pre	ad hoc	R	htsupld user/passwd input_file reject_file country_id ; perl hts_240_to_2400.inputfile.outputfile ; perl ushst2rms.inputfile.outfile.rejectfile
ibcalc	Investment Buy	Y	Dept	3	prepost ibcalc pre	rplbid	daily	R	ibcalc user/passwd
ibxpl	Investment Buy	N	N/A	3	rplxt	ibcalc	daily	N	ibxpl user/passwd
invaprg	Inventory Adjustments	N	N/A	ad hoc	N/A	N/A	monthly	N	invaprg user/passwd
invshp	Invoice Matching	N	N/A	2	N/A	N/A	daily	N	invshp user/passwd
invprg	Invoice Matching	N	N/A	ad hoc	ordprg	N/A	monthly	R	invprg user/passwd
lcanid	Letter of Credit	N	N/A	4	N/A	lcm700 (perl script)	daily	R	lcanid user/passwd output_file
lctid	Maintenance - Location	N	N/A	ad hoc	storeadd	N/A	monthly	R	lctid user/passwd
lcmid	Letter of Credit	N	N/A	4	N/A	lcm707 (perl script)	daily	R	lcmid user/passwd output_file
lcup798	Letter of Credit	N	N/A	2	lcm798 (perl script)	N/A	daily	R	lcup798 user/passwd input_file rej_file
lcupid	Letter of Credit	N	N/A	2	lcm730 (perl script)	N/A	daily	R	lcupid user/passwd input_file rej_file
lftskup	Stock Ledger	N	File-based	1	inv_bal_upload.sh (warehouse mgmt program)	stskupd	daily	N	lftskup user/passwd input_file output_file
lkestore	Maintenance - Location	Y	Dept	ad hoc	storeadd	prepost lkestore post	daily	R	lkestore user/passwd

mrt	Mass Return Transfers	Y	Warehouse	2	N/A	mrttrv		daily	R	mrt user/passwd
mrtprg	Mass Return Transfers	Y	Warehouse	ad hoc	N/A	mrtupd		ad hoc	R	mrtprg user/passwd
mrttrv	Mass Return Transfers	Y	Warehouse	2	mrt	mrtupd		daily	R	mrttrv user/passwd
mrtupd	Mass Return Transfers	Y	Warehouse	2	mrttrv	N/A		daily	R	mrtupd user/passwd
nwppurge	Stock Ledger	N	N/A	ad hoc	N/A	N/A		ad hoc	N	nwppurge user/passwd
nwpyearend	Stock Count	Y	Location	4	run on last day of year	N/A		yearly	R	nwpyearend user/passwd
ociroq	Replenishment	N	N/A	3	repladj	N/A		daily	R	ociroq user/passwd
onictext	Planning System Interface	Y	Transfer	4	onordext	N/A		weekly	R	onictext user/passwd datefile
onordid	Planning System Interface	Y	Store/Wh	4	onordid	N/A		daily	R	onordid user/passwd output_filename
onordext	Planning System Interface	Y	Order	4	prepost onordext pre	onictext		daily	R	onordext user/passwd datefile
ordautcl	Ordering	N	N/A	ad hoc	N/A	N/A		daily	N	ordautcl user/passwd
ordscnt	Deals	Y	Supplier	4	reclsdly	discothbply	dealcls	daily	R	ordscnt user/passwd
ordprg	Ordering	N	N/A	ad hoc	N/A	invprg		monthly	N	ordprg user/passwd
ordrev	Ordering	N	N/A	4	ordscnt	addord		daily	R	ordrev user/passwd
ordupd	Ordering	N	N/A	4	(After RPM pricing change extraction batch)	otbdlord		daily	N	ordupd user/passwd
otbdlord	OTB	N	N/A	4	ordupd	N/A		daily	R	otbdlord user/passwd output_file
otbdlsal	OTB	N	N/A	4	ordupd	N/A		daily	R	otbdlsal user/passwd output_file
otbdnid	OTB	N	N/A	4	ordupd	N/A		daily	R	otbdnid user/passwd output_file
otbprg	OTB	N	N/A	ad hoc	N/A	N/A		monthly	N	otbprg user/passwd
otbprfwd	OTB	Y	File-based	ad hoc	N/A	N/A		daily	R	otbprfwd user/passwd input_file reject_file
otbupld	OTB	Y	File-based	ad hoc	N/A	N/A		daily	R	otbupld user/passwd input_file reject_file
poscodnid	Point of Sale Interface	N	N/A	4	posdnid	prepost poscodnid post		daily	R	poscodnid user/passwd outfile
poscodnid	Point of Sale Interface	Y	N/A	ad hoc	N/A	prepost poscodnid post		daily	R	poscodnid user/passwd outfile
posgpcdd	Point of Sale Interface	N	N/A	4	reclsdly	N/A		daily	R	posgpcdd user/passwd output_file
posupld	Sales	Y	File-based	2	saexprms(ReSA)	prepost posupld post	salstage	daily	R	posupld user/passwd infile ref file vattile itemfile lockfile
precostcalc	Deals	Y	Supplier	2	prepost precostcalc pre	costcalc		daily	R	precostcalc user/passwd supplier (May use the batch_precostcalc.ksh for launching this program as it is created based on performance considerations)
prepost	Pre/post functionality	N	N/A	all phases	N/A	N/A		daily	N	prepost user/passwd program pre_or_post
reclsdly	Item Maintenance	Y	Reclass no	4	cremhierdly	prepost reclsdly post		daily	R	reclsdly user/passwd process_mode
repladj	Replenishment	Y	Dept	3	rplattupd	repxt		daily	R	repladj user/passwd
replsizeprofile	Replenishment	N	N/A	ad hoc	prepost replsizeprofile pre	N/A		ad hoc	N	replsizeprofile user/passwd Y/N. (Y/N indicator indicates if allocations is installed or not, if installed pre job for this program has to be run prepost replsizeprofile pre)
repxt	Replenishment	Y	Partition (Item)	3	prepost repxt pre	prepost repxt post	rplex	daily	R	repxt user/passwd partition_position (May use the batch_repxt.ksh for launching this program as it is created based on performance considerations)
rlmaint	Replenishment	Y	Location	3	storeadd	prepost rlmaint post		daily	R	rlmaint username/password
rplapprv	Replenishment	N	N/A	3	rplattupd	N/A		daily	R	rplapprv user/passwd
rplathistprg	Replenishment	N	N/A	ad hoc	N/A	N/A		ad hoc	N	rplathistprg user/passwd (This batch may be run only if repl_attr_hist_retention_weeks in system_options table is set)
rplattupd	Replenishment	Y	Location	3	prepost rplattupd pre	prepost rplattupd post	rplex	daily	R	rplattupd user/passwd
rplbid	Replenishment	Y	Supplier	3	repxt	prepost rplex post	cntrprsa(#	daily	R	rplbid username/password
rplex	Replenishment	Y	Dept	3	repxt	prepost rplex post	cntrprsa(#	daily	R	rplex user/passwd dept (May use the batch_rplex.ksh for launching this program as it is created based on performance considerations)
rplprg	Replenishment	N	N/A	ad hoc	N/A	N/A		daily	N	rplprg user/passwd
rplprg_month	Replenishment	N	N/A	ad hoc	N/A	N/A		monthly	N	rplprg_month user/passwd
rplsplit	Replenishment	Y	Supplier	3	supcnstr	rplapprv		daily	R	rplsplit user/passwd
rprmovavg	Pricing	Y	Store	3	salstage	N/A		daily	R	rprmovavg user/passwd business_date(YYYYMMDD) store(optional)
rvprg	RTV	N	N/A	ad hoc	N/A	N/A		monthly	N	rvprg user/passwd
sacrypt	Sales Audit	Y	Store/Day	SA	sagetref	N/A		daily	N	sacrypt user/passwd infile outfile key_e/d (Encryption/Decryption indicator) Note: outfile generated by batch is infile for saimptg.
saescheat	Sales Audit	N	N/A	SA	satotals	saexpm	sapurge	monthly	R	saescheat user/passwd
saexpach	Sales Audit	N	N/A	SA	satotals	N/A		daily	R	saexpach user/passwd
saexpgl	Sales Audit	N	N/A	SA	satotals	N/A		daily	R	saexpgl user/passwd
saexpm	Sales Audit	N	N/A	SA	satotals	N/A		daily	R	saexpm user/passwd
saexprow	Sales Audit	Y	Store	SA	saescheat	N/A		daily	R	saexprow user/passwd
saexprow	Sales Audit	Y	Store	SA	sapreexp	ress2rdw(perf scrip)		daily	R	saexprow user/passwd ; perf res2rdw.inpoutfile.outpoutfile
saexpms	Sales Audit	Y	Store	SA	satotals	saprepost saexpms post		daily	R	saexpms user/passwd
saexpuar	Sales Audit	N	N/A	SA	satotals	N/A		daily	R	saexpuar user/passwd
sagetref	Sales Audit	N	N/A	SA	satotals	N/A		daily	R	sagetref user/passwd itemfile wastefile ref_itemfile prim_variantele varupctfile storedayfile codefile errorfile cvcvalfile
saimpaj	Sales Audit	N	N/A	SA	satotals	N/A		daily	R	storeprofile tendertypefile merchcodefile partnerfile supplierfile employeefile bannerfile
saimptog	Sales Audit	Y	Store/Day	SA	satotals	N/A		daily	N	(To prevent a file from being written, place a ' ' in its place. Note: Item files must all be written together).
saimptogfn	Sales Audit	N	N/A	SA	satotals	N/A		daily	R	saimptog user/passwd input_file rej_file
saimptogfn	Sales Audit	N	N/A	SA	satotals	N/A		daily	R	saimptog user/passwd input_file rej_file
saimptogfn_upd	Sales Audit	N	Store/Day	SA	satotals	N/A		daily	R	saimptog user/passwd store_day_file
salgnp	Stock Ledger	N	N/A	3	salstage	N/A		daily	R	salgnp user/passwd
saldy	Stock Ledger	Y	Store/Wh	3	salstage	N/A		daily	R	saldy user/passwd
saleoh	Stock Ledger	Y	Dept	3	salstage	N/A		half yearly	N	saleoh user/passwd
salms	Sales	N	N/A	0	N/A	N/A		daily	R	salms user/passwd
salmaint	Stock Ledger	N	N/A	ad hoc	N/A	N/A		half yearly	N	salmaint user/passwd pre_or_post

salmth	Stock Ledger	Y	Dept	3	salweek	prepost salmth post	monthly	R	salmth user/passwd
salprg	Stock Ledger	N	N/A	ad hoc	pre_dw_extract.ksh(RMS to RDW RETL Extract)	N/A	daily	N	salprg user/passwd
					salweek				
					saldly				
					salapnd				
					dealct				
					rpmovavg				
					flgd1				
					flgd2				
					postupld				
					saldy				
					stkdy				
					salapnd				
					prepost salweek pre				
					dealct				
					dealinc				
					vendinc				
					prepost salweek post				
salweek	Stock Ledger	Y	Dept	3	SA audit process	(Before any SA export process)	daily	R	salweek user/passwd
sapreop	Sales Audit	N	N/A	SA	N/A	N/A	daily	R	sapreop user/passwd
saprepost	Sales Audit	N	N/A	SA	SA audit process	N/A	daily	N	saprepost user/passwd program_pre_or_post
					prepost sapurge pre	(This program should be run as the last program in the ReSA batch schedule)			
sapurge	Sales Audit	Y	Store	SA	saprepost sapurge post		daily	R	sapurge user/passwd deleted_items_file (optional list of store days to be deleted)
sanules	Sales Audit	N	N/A	SA	saastals	saescheat	daily	R	sanules user/passwd store_no
					(It should run before the DTESYS batch program and before the next store/day's transactions are received)				
sastrycr	Sales Audit	N	N/A	date_set	dtesys		daily	R	sastrycr user/passwd (YY'YMMDD)
saastals	Sales Audit	N	N/A	SA	saastals		daily	R	saastals user/passwd store_no
saavouch	Sales Audit	N	N/A	SA	saavouch		daily	R	saavouch user/passwd infile refile tendertype_file
saacct	Costing	Y	Cost change	3	costidex.ksh (RMS to RDW RETL extract)	prepost socext post	daily	R	saacct user/passwd
schedprg	Organizational Hierarchy	N	N/A	ad hoc	N/A	N/A	monthly	R	schedprg user/passwd
sstmain	Item Maintenance	N	N/A	ad hoc	ltnrid	N/A	ad hoc	R	sstmain user/passwd
southnid	Forecasting	Y	Domain Id	4	N/A	N/A	daily	R	southnid user/passwd
stkdy	Stock Ledger	Y	Dept	3	stkvar	salweek	daily	R	stkdy user/passwd
stkgprg	Stock Ledger	N	N/A	ad hoc	N/A	prepost stkgprg post	monthly	N	stkgprg user/passwd
stkchedxpdl	Stock Ledger	Y	Location	0	N/A	N/A	daily	R	stkchedxpdl user/passwd
stkuypd	Stock Ledger	Y	Location	3	prepost stkuypd pre	prepost stkuypd post	daily	R	stkuypd user/passwd
stkuypd	Stock Ledger	Y	Dept	1	stkuypd	N/A	daily	R	stkuypd user/passwd input_file reject_file
stkuypd	Stock Ledger	Y	Dept	1	N/A	N/A	daily	R	stkuypd user/passwd [ report_file_name ]
stkxpdl	Stock Ledger	Y	Dept	3	stkchedxpdl	stkuypd	daily	R	stkxpdl user/passwd
stlgnhd	Stock Ledger	Y	Dept	4	wasstadj	N/A	weekly	R	stlgnhd user/passwd input_file
stlgnhd	Stock Ledger	Y	Dept	4	N/A	prepost storeadd post			
storeadd	Maintenance - Location	N	N/A	ad hoc	N/A	likstore	daily	R	storeadd user/passwd
supchnr	Replenishment	N	N/A	3	rpbid	prepost supchnr post	monthly	R	supchnr user/passwd
supmth	Stock Ledger	Y	Dept	3	N/A	N/A	monthly	R	supmth user/passwd
tamperctn	Receiving	N	N/A	ad hoc	N/A	N/A	ad hoc	N	tamperctn user/passwd
totkhdid	Maintenance	N	N/A	ad hoc	N/A	prepost totkhdid post	daily	R	totkhdid user/passwd filename_print_online_in_days_in_advance [location]
trpscdn	Sales Tax	N	N/A	4	trpscdn	prepost trpscdn post	daily	R	trpscdn user/passwd output_file
tranupld	Trade Management	Y	File-based	ad hoc	N/A	N/A	daily	R	tranupld user/passwd infile
tsfclose	Transfers	Y	Transfer	ad hoc	N/A	N/A	daily	R	tsfclose user/passwd
tsfgrg	Transfers	N	N/A	ad hoc	N/A	N/A	monthly	R	tsfgrg user/passwd
trpscdn	Point of Sale Interface	N	N/A	ad hoc	N/A	trpscdn	daily	R	trpscdn user/passwd
trtpupld	Sales Tax	N	N/A	4	N/A	ad hoc	ad hoc	R	trtpupld username/password input_file reject_file
vatxpdl	Maintenance - VAT	Y	Vat Region	0	N/A	prepost vatxpdl post	daily	R	vatxpdl user/passwd
					dealct	prepost vendinc post			
					salstage(if daily)	salweek(if weekly)			
					prepost vendinc pre	salweek(if monthly)	daily	R	vendinc user/passwd
					prepost vendinc post	salweek(if weekly)			
					salstage(if daily)	salweek(if weekly)			
					prepost vendinc pre	salweek(if monthly)	daily	R	vendinc user/passwd
					edupack	prepost vrpibid post	daily	R	vendinc user/passwd
					prepost vrpibid post	daily	daily	R	vrpibid user/passwd
					N/A	stkuypd	daily	R	stkuypd user/passwd
					N/A	stkuypd	daily	R	stkuypd user/passwd
					costcalc	prepost wfcostcalc pre	daily	R	wfcostcalc user/passwd
					prepost wfcostcalc pre	prepost wfcostcalc post	daily	R	wfcostcalc user/passwd
					N/A	wfdrdcl	daily	R	wfdrdcl user/passwd
					N/A	wfdrdcl	daily	R	wfdrdcl user/passwd
					N/A	N/A	ad hoc	R	wfdrdupld user/passwd input_file_directory output_file_directory number_of_threads
					N/A	N/A	daily	R	wfdrdupld user/passwd
					N/A	prepost whadd post	daily	R	whadd user/passwd
					(Must be run after all replenishment batch programs)	prepost whstrag post	daily	R	whstrag user/passwd

### RPM Dependency and Scheduling Details

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
ItemReclassBatch	Future Retail	N	N/A	N/A	clearance(RMS)	NewItemLocBatch	daily/ad hoc	N	clearanceBatch.sh rpm-app-userid password
NewItemLocBatch	Future Retail	N	N/A	N/A	storeadd(RMS), ItemReclassBatch	LocationMoveBatch	daily/ad hoc	N	newItemLocBatch.sh rpm-app-userid password [status [error-commit-count]]
LocationMoveScheduleBatch	Zone Structure/Future Retail	Y	Location move	N/A	NewItemLocBatch	LocationMoveBatch, PriceEventExecutionBatch	daily, adhoc	N	locationMoveScheduleBatch.sh rpm-app-userid password
LocationMoveBatch	Zone Structure/Future Retail	Y	Location move	N/A	NewItemLocBatch	PriceEventExecutionBatch	daily	N	locationMoveBatch.sh rpm-app-userid password
PriceEventExecutionBatch	Price Change/Clearance/Promotion	Y	Pricing event	N/A	salstage (RMS)	PriceEventExecutionRMSBatch	daily	N	priceEventExecutionBatch.sh rpm-app-userid password
PriceEventExecutionRMSBatch	Price Change/Clearance/Promotion	Y	Pricing event	N/A	PriceEventExecutionBatch	PriceEventExecutionDealsBatch	daily	N	priceEventExecutionRMSBatch.sh rpm-app-userid password
PriceEventExecutionDealsBatch	Price Change/Clearance/Promotion	Y	Pricing event	N/A	PriceEventExecutionRMSBatch	MerchExtractKickOffBatch	daily	N	priceEventExecutionDealsBatch.sh rpm-app-userid password
PriceStrategyCalendarBatch	Price Strategy	N	N/A	N/A	N/A	MerchExtractKickOffBatch	daily	N	priceStrategyCalendarBatch.sh rpm-app-userid password
WorksheetAutoApproveBatch	Pricing Worksheet	Y	Price strategy	N/A	N/A	MerchExtractKickOffBatch	daily	N	worksheetAutoApproveBatch.sh rpm-app-userid password
					storeadd (RMS)				
					WorksheetAutoApproveBatch				
					PriceStrategyCalendarBatch				
MerchExtractKickOffBatch	Pricing Worksheet	Y	Price strategy	N/A	wfcostcalc (RMS)	Wholesale Item Catalog Report (RMS)	daily	N	merchExtractKickOffBatch.sh rpm-app-userid password
PurgeBulkConflictCheckArtifacts	Conflict Checking	N	N/A	N/A	MerchExtractKickOffBatch	N/A	daily	N	purgeBulkConflictCheckArtifacts.sh rpm-app-userid password
					MerchExtractKickOffBatch				
RPMTcORPOSPublishBatch.sh	Price Change/Clearance/Promotion	N	N/A	N/A	WorksheetAutoApproveBatch	N/A	daily	N	ksh RPMTcORPOSPublishBatch.sh -userid/passwd@sid -<log path> -<error path>
RPMTcORPOSPublishExport.sh	Price Change/Clearance/Promotion	Y	Location	N/A	RPMTcORPOSPublishBatch.sh	N/A	daily	N	ksh RPMTcORPOSPublishExport.sh -userid/passwd@sid -<Number of slots> -<logpath> -<error path> -<Export path>
RegularPriceChangePublishBatch	Regular Price Changes	N	N/A	N/A	WorksheetAutoApproveBatch	RegularPriceChangePublishExport	daily/ad hoc	N	regularPriceChangePublishBatch.sh rpm-app-userid password
RegularPriceChangePublishExport	Regular Price Changes	N	N/A	N/A	RegularPriceChangePublishBatch	RegularPriceChangePublishExport	daily/ad hoc	N	regularPriceChangePublishExport.sh rpm-db-userid/pwd@database [export-path]
ClearancePriceChangePublishBatch	Clearance	Y	Price event (item/loc)	N/A	WorksheetAutoApproveBatch	ClearancePriceChangePublishExport	daily/ad hoc	N	clearancePriceChangePublishBatch.sh rpm-app-userid password
ClearancePriceChangePublishExport	Clearance	Y	Price event (item/loc)	N/A	ClearancePriceChangePublishBatch	ClearancePriceChangePublishExport	daily/ad hoc	N	clearancePriceChangePublishExport.sh rpm-db-userid/pwd@database [export-path]
PromotionPriceChangePublishBatch	Promotions	Y	Price event (item/loc)	N/A	WorksheetAutoApproveBatch	PromotionPriceChangePublishExport	daily/ad hoc	N	promotionPriceChangePublishBatch.sh rpm-app-userid password
PromotionPriceChangePublishExport	Promotions	N	Price event (item/loc)	N/A	PromotionPriceChangePublishBatch	PromotionPriceChangePublishExport	daily/ad hoc	N	promotionPriceChangePublishExport.sh rpm-db-userid/pwd@database [export-path]

PriceChangeAutoApproveResultsPurgeBatch	Purge	N	N/A	N/A	N/A	N/A	N/A	daily/lid	hoc	N	priceChangeAutoApproveResultsPurgeBatch.sh rpm-app-userid password
PriceChangePurgeBatch	Purge	N	N/A	N/A	N/A	N/A	N/A	daily/lid	hoc	N	priceChangePurgeBatch.sh rpm-app-userid password
PriceChangePurgeWorkspaceBatch	Purge	N	N/A	N/A	N/A	N/A	N/A	daily/lid	hoc	N	priceChangePurgeWorkspaceBatch.sh rpm-app-userid password
PromotionPurgeBatch	Purge	N	N/A	N/A	N/A	N/A	N/A	daily/lid	hoc	N	promotionPurgeBatch.sh rpm-app-userid password
PurgeExpiredExecutedOrApprovedClearancesBatch	Purge	N	N/A	N/A	N/A	N/A	N/A	daily/lid	hoc	N	purgeExpiredExecutedOrApprovedClearancesBatch.sh rpm-app-userid password
PurgeUnusedAndAbandonedClearancesBatch	Purge	N	N/A	N/A	N/A	N/A	N/A	daily/lid	hoc	N	purgeUnusedAndAbandonedClearancesBatch.sh rpm-app-userid password
PurgeLocationMovesBatch	Purge	N	N/A	N/A	N/A	N/A	N/A	daily/lid	hoc	N	purgeLocationMovesBatch.sh rpm-app-userid password
ZoneFutureRetailPurgeBatch	Purge	N	N/A	N/A	N/A	N/A	N/A	ad hoc	N	N	zoneFutureRetailPurgeBatch.sh rpm-app-userid password
ItemLocDeleteBatch	Purge	N	N/A	N/A	N/A	N/A	N/A	ad hoc	N	N	itemLocDeleteBatch.sh rpm-app-userid password
PriceChangeAreaDifferentialBatch	Price Change	Y	N/A	N/A	N/A	N/A	N/A	ad hoc	N	N	priceChangeAreaDifferentialBatch rpm-app-userid password
InjectorPriceEventBatch	Price Change/Clearance/Promotion	Y	Item/Location	N/A	N/A	N/A	N/A	ad hoc	N	N	injectorPriceEventBatch.sh rpm-app-userid password [status=<status>] [event_type=<event_type>]
taskPurgeBatch.sh	Purge	N	N/A	N/A	N/A	N/A	N/A	daily/lid	hoc	N	taskPurgeBatch.sh <username> <password> [<purgeDays>] [Y/N]

**ReIM Dependency and Scheduling Details**

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
reimaccountworkspacepurge	Invoice Matching (ReIM)	N	N/A	N/A	N/A	N/A	ad hoc	R	Userid/password
reimautomatch	Invoice Matching (ReIM)	Y	N/A	6	NA	reimrollup reimposting	daily	R	Userid/password
reimpurge	Invoice Matching (ReIM)	N	N/A	0	N/A	N/A	daily	R	Userid/password
reimcomplexdownload	Invoice Matching (ReIM)	Y	N/A	5	vendinv(RMS), vendinv(RMS)	reimautomatch	daily	R	Userid/password BlockSize PartitionNo
reimdiscrepancy	Invoice Matching (ReIM)	N	N/A	1	N/A	N/A	daily	R	Userid/password
reimediupload	Invoice Matching (ReIM)	Y	N/A	5	eddirv(RMS)	reimautomatch	daily	R	Userid/password "EDI input file with path" "EDI reject file with path"
reimediupload	Invoice Matching (ReIM)	N	N/A	7	reimposting	N/A	daily	R	Userid/password
reimfixeddownload	Invoice Matching (ReIM)	Y	N/A	5	vendinv(RMS), vendinv(RMS)	reimautomatch	daily	R	Userid/password BlockSize PartitionNo
reimcredinotautomatch	Invoice Matching (ReIM)	Y	N/A	6	NA	reimrollup	daily	R	Userid/password
reimfinancialpostingworkspacepurge	Invoice Matching (ReIM)	N	N/A	6	N/A	reimposting	daily	R	Userid/password
reimrollup	Invoice Matching (ReIM)	N	N/A	6	reimautomatch	reimposting	daily	R	Userid/password
reimreceiptwriteoff	Invoice Matching (ReIM)	N	N/A	6	reimautomatch	N/A	daily	R	Userid/password
reimposting	Invoice Matching (ReIM)	N	N/A	6	reimrollup	N/A	daily	R	Userid/password

**RMS to RPAS RETL Extracts Dependency and Scheduling Details (EXTRACTS FOR RPAS)**

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
pre_rmse_rpas.ksh	Planning/Forecast System Interface	N	N/A	N/A	N/A. This is a pre setup script	N/A	daily	N	N/A
rmse_rpas.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh. (This is the launch script to run the extracts)	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_attributes.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh saldly	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_daily_sales.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_domain.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh sitrain recsldly dlyprg	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_item_master.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh recsldly dlyprg	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_merchier.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh dlyprg	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_orghier.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh stkdly	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_stock_on_hand.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh storeadd dlyprg	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_store.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_suppliers.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh hstwkupd salweek dlyprg	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_weekly_sales.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh whadd	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_wh.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh dlyprg	Refer to RPAS Operations guide	daily	N	N/A
rmsl_rpas_forecast.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	rmsl_rpas_forecast.ksh daily or weekly
rmsl_rpas_update_retl_date.ksh	Planning/Forecast System Interface	N	N/A	N/A	After all RMS/Planning System Integration RETL scripts are run	Refer to RPAS Operations guide	daily	N	rmsl_rpas_update_retl_date.ksh CLOSED_ORDER or RECEIVED_QTY

**RMS to RDW RETL Extracts Dependency and Scheduling Details (EXTRACTS FOR RDW)**

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
cdedflox.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
empirex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
cmptrfmx.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
cmptrfocx.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
cmpryocx.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
emplyex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
orgaraex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lcltrld (RMS)	Refer to RDW operations guide	daily	N	N/A
orgchanex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lcltrld (RMS)	Refer to RDW operations guide	daily	N	N/A
orgchnex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lcltrld (RMS)	Refer to RDW operations guide	daily	N	N/A
orgdsex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lcltrld (RMS)	Refer to RDW operations guide	daily	N	N/A
orglmax.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lcltrld (RMS)	Refer to RDW operations guide	daily	N	N/A
orglocox.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lcltrld (RMS)	Refer to RDW operations guide	daily	N	N/A
orgllolex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lcltrld (RMS)	Refer to RDW operations guide	daily	N	N/A
orgltmax.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lcltrld (RMS)	Refer to RDW operations guide	daily	N	N/A
orgltrex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lcltrld (RMS)	Refer to RDW operations guide	daily	N	N/A
orgrgnex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lcltrld (RMS)	Refer to RDW operations guide	daily	N	N/A
phasex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
prcdsex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recsldly (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prcdmpex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A



prddex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recldsy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prddiffex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recldsy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prddivex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recldsy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prddtypex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recldsy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prdrpex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recldsy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prdrsex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
prdrslsex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
prdrimex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recldsy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prdrimlsex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recldsy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prdrimlmlsex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
prdrimlmlslsex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
prdrpimex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recldsy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prdrbcex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recldsy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prdrudex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdy (RMS), recldsy (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
regprgpxex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
regmrmex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
rsnex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
seasnex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
subtrantypex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
supctrex.ksh	RDW interface	N	N/A	N/A	A, B, cntnmain (RMS)	Refer to RDW operations guide	daily	N	N/A
supsupex.ksh	RDW interface	N	N/A	N/A	A, B, cntnmain (RMS)	Refer to RDW operations guide	daily	N	N/A
suptrmex.ksh	RDW interface	N	N/A	N/A	A, B, cntnmain (RMS)	Refer to RDW operations guide	daily	N	N/A
suptrps.ksh	RDW interface	N	N/A	N/A	A, B, cntnmain (RMS)	Refer to RDW operations guide	daily	N	N/A
trndrtypex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
tlhyplex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
wfcsustex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
wfcsustgpxex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A

Fact source:

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
cmprtrpidx.ksh	RDW interface	N	N/A	N/A	B	Refer to RDW operations guide	daily	N	cmprtrpidx.ksh output_file_path/output_file_name
ctslidex.ksh	RDW interface	N	N/A	N/A	C	Refer to RDW operations guide	daily	N	ctslidex.ksh output_file_path/output_file_name
exchngtrates.ksh	RDW interface	N	N/A	N/A	B	Refer to RDW operations guide	daily	N	exchngtrates.ksh output_file_path/output_file_name
ivlidx.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS), mrt (RMS), ordrev (RMS)	Refer to RDW operations guide	daily	Y	ivlidx.ksh output_file_path/output_file_name
ivallidx.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS), mrt (RMS)	Refer to RDW operations guide	daily	N	ivallidx.ksh output_file_path/output_file_name
ivrcplidx.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS), mrt (RMS)	Refer to RDW operations guide	daily	N	ivrcplidx.ksh output_file_path/output_file_name
ivridex.ksh	RDW interface	N	N/A	N/A	C	Refer to RDW operations guide	daily	N	ivridex.ksh output_file_path/output_file_name
ivtldex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS), mrt (RMS)	Refer to RDW operations guide	daily	N	ivtldex.ksh output_file_path/output_file_name
ivulidx.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS), mrt (RMS)	Refer to RDW operations guide	daily	N	ivulidx.ksh output_file_path/output_file_name
iplotidx.ksh	RDW interface	N	N/A	N/A	C, saexprow (ReSA), resa2rdrw	Refer to RDW operations guide	daily	N	iplotidx.ksh output_file_path/output_file_name
iptoidex.ksh	RDW interface	N	N/A	N/A	C, saexprow (ReSA), resa2rdrw	Refer to RDW operations guide	daily	N	iptoidex.ksh output_file_path/output_file_name
ncstulidex.ksh	RDW interface	N	N/A	N/A	C, costcalc (RMS)	Refer to RDW operations guide	daily	N	ncstulidex.ksh output_file_path/output_file_name
post_dwi_temp.ksh	RDW interface	N	N/A	N/A	All extract batches	Refer to RDW operations guide	daily	N	N/A
prclidx.ksh	RDW interface	N	N/A	N/A	N/A	Refer to RDW operations guide	daily	N	prclidx.ksh output_file_path/output_file_name
pre_dwi_extract.ksh	RDW interface	N	N/A	N/A	A	salimh(RMS). Also refer to RDW operations guide	daily	N	N/A
pre_dwi_temp.ksh	RDW interface	N	N/A	N/A	B	Refer to RDW operations guide	daily	N	N/A
rpclidex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS) C, cntprts (RMS), edlupavi (RMS),	Refer to RDW operations guide	daily	N	rpclidex.ksh output_file_path/output_file_name
savidex.ksh	RDW interface	N	N/A	N/A	C, rplappr (RMS)	Refer to RDW operations guide	daily	N	savidex.ksh output_file_path/output_file_name
scmiaidex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	N	scmiaidex.ksh output_file_path/output_file_name
scmidex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	N	scmidex.ksh output_file_path/output_file_name
scrtidex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	Y	scrtidex.ksh output_file_path/output_file_name
scrtldex.ksh	RDW interface	N	N/A	N/A	C, rplappr (RMS), cntprts (RMS), rplbid (RMS), cntnmain (RMS),	Refer to RDW operations guide	daily	N	scrtldex.ksh output_file_path/output_file_name
scldex.ksh	RDW interface	N	N/A	N/A	B, rml_rpas_forecast.ksh (RMS to RPAS extract)	Refer to RDW operations guide	daily	N	scldex.ksh output_file_path/output_file_name
slclwex.ksh	RDW interface	N	N/A	N/A	C, saexprow (ReSA), resa2rdrw	Refer to RDW operations guide	daily	Y	slclwex.ksh output_file_path/output_file_name
slslidex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	N	slslidex.ksh output_file_path/output_file_name
slsmkndidex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	N	slsmkndidex.ksh output_file_path/output_file_name
slblmhex.ksh	RDW interface	N	N/A	N/A	C, salimh (RMS)	Refer to RDW operations guide	daily	N	slblmhex.ksh output_file_path/output_file_name
slblwex.ksh	RDW interface	N	N/A	N/A	C, salweek (RMS)	Refer to RDW operations guide	daily	N	slblwex.ksh output_file_path/output_file_name
tlidmex.ksh	RDW interface	N	N/A	N/A	C, saexprow (ReSA), resa2rdrw	Refer to RDW operations guide	daily	N	tlidmex.ksh output_file_path/output_file_name
vhreschdex.ksh	RDW interface	N	N/A	N/A	B, savouch (ReSA)	Refer to RDW operations guide	daily	N	vhreschdex.ksh output_file_path/output_file_name
vhcmoveldsidx.ksh	RDW interface	N	N/A	N/A	B, savouch (ReSA)	Refer to RDW operations guide	daily	N	vhcmoveldsidx.ksh output_file_path/output_file_name
vhtroutwex.ksh	RDW interface	N	N/A	N/A	B, savouch (ReSA)	Refer to RDW operations guide	daily	N	vhtroutwex.ksh output_file_path/output_file_name
wfslidex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	n	wfslidex.ksh output_file_path/output_file_name
wfslsmkndidex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	n	wfslsmkndidex.ksh output_file_path/output_file_name

Notes:  
**A** is a set of batch processes on the RDW system.  
**A** consists of the following RDW batch modules:  
factopendm.ksh  
medfactopendm.ksh  
factoclosedm.ksh  
mf\_prime.ksh  
**B** is pre\_dwi\_extract.ksh DWI batch process.  
**C** is pre\_dwi\_temp.ksh DWI batch process.

**RMS to AIP RETL Extracts Dependency and Scheduling Details (EXTRACTS FOR AIP)**

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
pre_rmse_aip.ksh	AIP interface	N	N/A	N/A	AIP RETL Extracts	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_aloc_in_well.ksh	AIP interface	N	N/A	N/A	AIP RETL Extracts pre_rmse_aip.ksh	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_banded_item.ksh	AIP interface	N	N/A	N/A	AIP RETL Extracts pre_rmse_aip.ksh, dlyprg	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_cp_po.ksh	AIP interface	N	N/A	N/A	AIP RETL Extracts pre_rmse_aip.ksh	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_future_delivery_alloc.ksh	AIP interface	N	N/A	N/A	AIP RETL Extracts pre_rmse_aip.ksh	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_future_delivery_order.ksh	AIP interface	N	N/A	N/A	AIP RETL Extracts pre_rmse_aip.ksh, vrpibkd, cntntrdb	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_future_delivery_tsl.ksh	AIP interface	N	N/A	N/A	AIP RETL Extracts pre_rmse_aip.ksh, reqext	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_item_loc_traits.ksh	AIP interface	N	N/A	N/A	AIP RETL Extracts pre_rmse_aip.ksh, dlyprg	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_item_master.ksh	AIP interface	N	N/A	N/A	AIP RETL Extracts pre_rmse_aip.ksh, recldsy	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_item_retail.ksh	AIP interface	N	N/A	N/A	AIP RETL Extracts pre_rmse_aip.ksh, dlyprg	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_item_sale.ksh	AIP interface	N	N/A	N/A	AIP RETL Extracts pre_rmse_aip.ksh, sltmain	Refer to AIP Operations and Installation Guides	daily	N	N/A

rmse_aip_item_supp_country.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh, dlyprg	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_merchier.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh, dlyprg	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_orghier.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh, dlyprg	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_res_city.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh, vplbld, cntrodb, reqext	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_store.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh, storeadd, likestore, dlyprg	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_substitute_items.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_suppliers.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_tsf_in_well.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh, reqext	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_wh.ksh	AIP interface	N	N/A	AIP RETL Extracts pre_rmse_aip.ksh, whadd and dlyprg pre_rmse_aip.ksh, stkvar, wasteadj, salstage,	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_store_cur_inventory.ksh	AIP interface	Y	Item_loc_soh (number of	AIP RETL Extracts reqext, posupid rmse_store_cur_inventory.ksh (if running delta	Refer to AIP Operations and Installation Guides	daily	N	D - single-threaded delta extract F - multi-threaded full extract if ITEM_LOC is partitioned; single-threaded full extract if ITEM_LOC is not partitioned
rmse_wh_cur_inventory.ksh	AIP interface	Y	Warehouse	AIP RETL Extracts extract), stkvar, wasteadj, salstage, reqext	Refer to AIP Operations and Installation Guides	daily	N	D - single-threaded delta extract F - multi-threaded full extract if ITEM_LOC is partitioned; single-threaded full extract if ITEM_LOC is not partitioned





---

---

## Interface Diagrams for RMS and RPAS


Because RMS is the retailer's central merchandising transactional processing system, it is the principle source of the foundation data needed in some of the Oracle Retail suite of products. RMS provides foundation data to RPAS, and RPAS provides planning data to RMS.

This chapter presents flow diagrams for data processing from sources. The source system's program or output file is illustrated, along with the program or process that interfaces with the source. After initial interface processing of the source, the diagrams illustrate the flow of the data.

Before setting up a program schedule, familiarize yourself with the functional and technical constraints associated with each program. Refer to the *Oracle Retail Merchandising System Operations Guide* for more information about these interface programs.

## RMS Pre/Post Extract Diagrams


### RMS Pre RETL Extract Maintenance

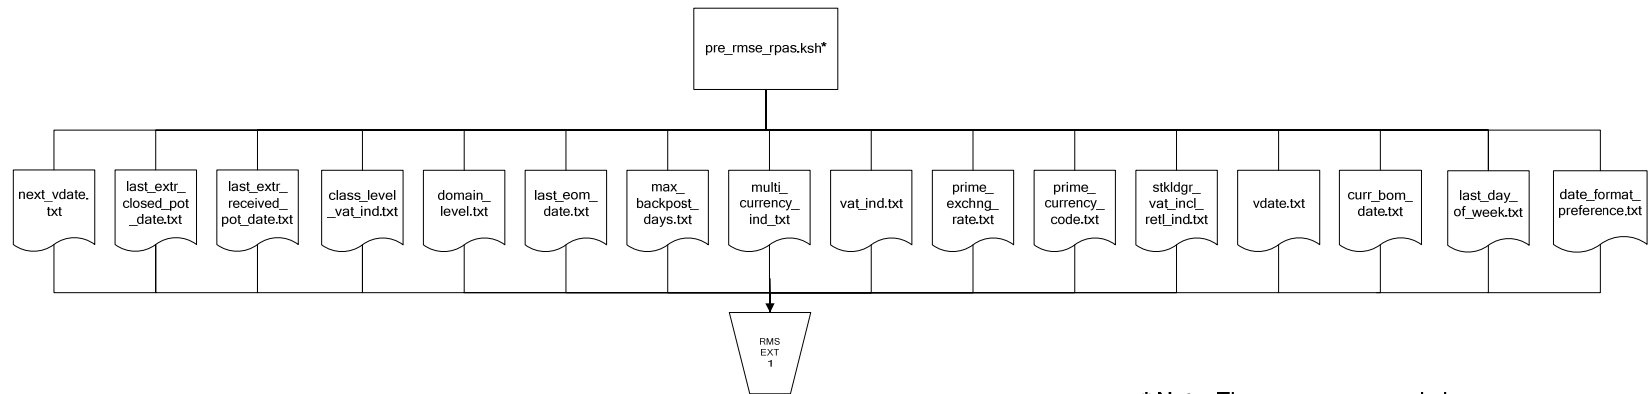


**\* Note:** The `pre_rmse_rpas.ksh` program checks for existing `.txt` output files. Because of this validation, retailers running the program for the first time should include an optional `-c` parameter. This parameter allows the program to run successfully without pre-existing `.txt` output files.

## RMS Foundation Data Extract Diagrams

### Merchandise Hierarchy for RPAS

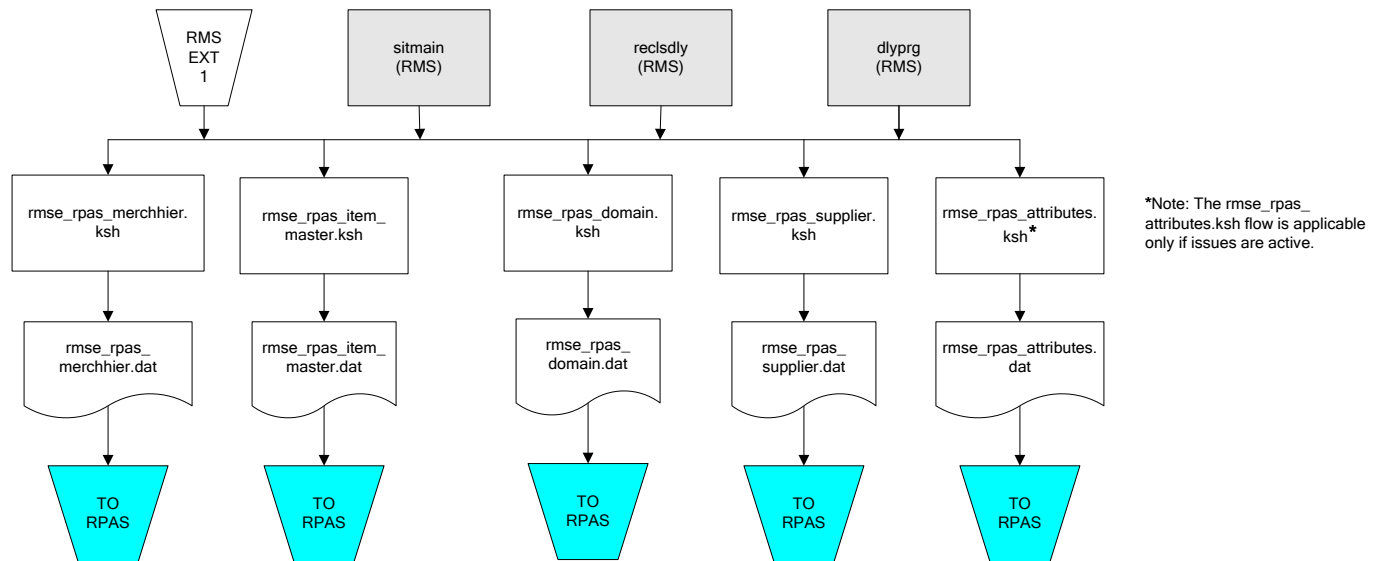


### Organization Hierarchy for RPAS

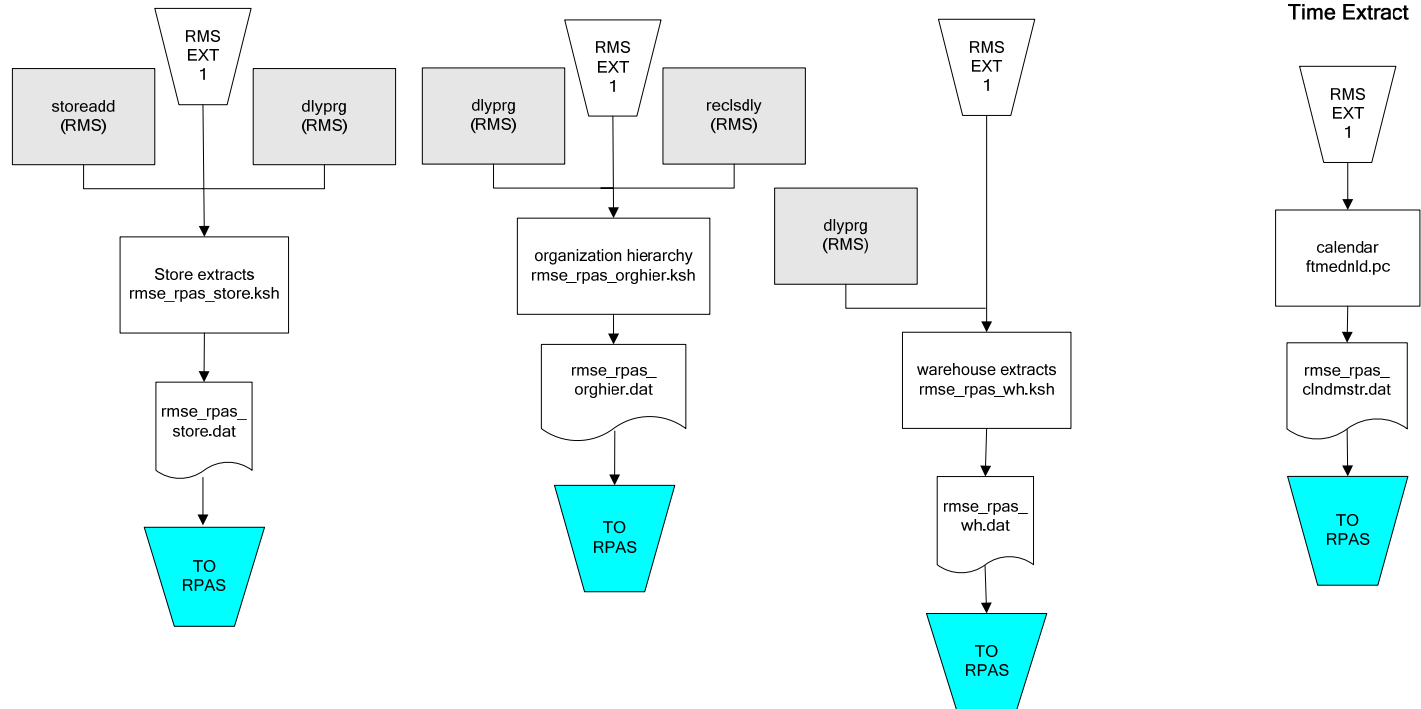



## RMS Fact Data Extract Diagrams

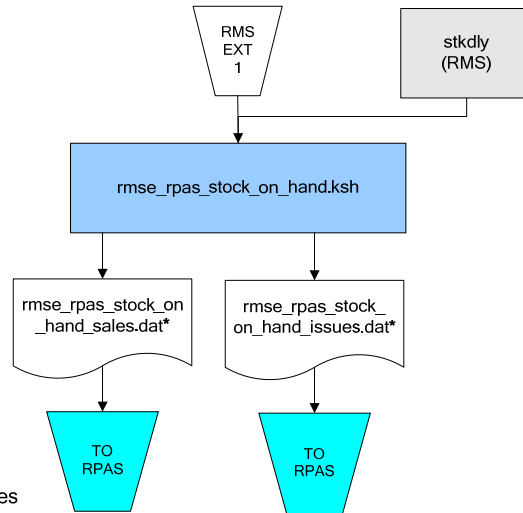


**\* Note:**

If issues are active, the following two files result from the rmse\_rpas\_stock\_on\_hand.ksh flow:  
 rmse\_rpas\_stock\_on\_hand\_issues.dat  
 rmse\_rpas\_stock\_on\_hand\_sales.dat

If issues are **not** active, the following file results from the rmse\_rpas\_stock\_on\_hand.ksh flow:  
 rmse\_rpas\_stock\_on\_hand\_sales.dat


## Sales Extracts For RPAS

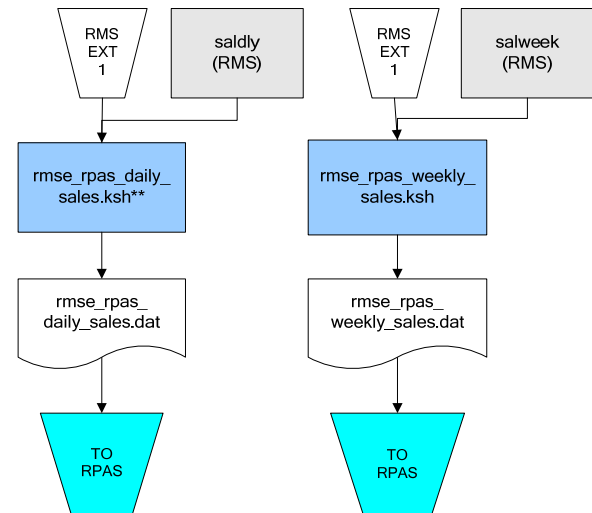

**\*\* Note:**

Depending upon the configuration of rmse\_rpas\_daily\_sales.ksh, the data can be pulled from TRAN\_DATA\_HISTORY or TRAN\_DATA.

## RPAS-RMS Fact Load Diagram

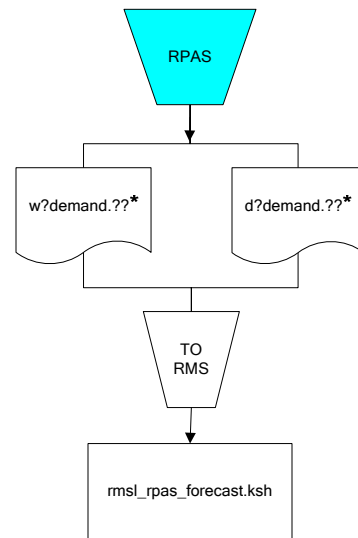

**\*Note:**

? can represent the following:

- i (for issues)
- s (for stores)

?? represents domain 01-99.

---

---

## Interface Diagrams for RMS and RDW


RMS works in conjunction with the Oracle Retail Extract Transform and Load (RETL) framework. RETL provides high-performance processing to extract data from Oracle Retail applications for use in data warehouses. The architecture allows database batch processes to take advantage of parallel processing capabilities.

This chapter presents flow diagrams for the RETL extraction RMS programs. The source system's program or output file is illustrated, along with the program or process that interfaces with the source. Note that the data flows are organized according to the logic (dimension data and table data) of Oracle Retail Data Warehouse (RDW), but you can use the data to suit your business needs.

For detailed information about dimensions and facts, see the *Oracle Retail Data Warehouse Operations Guide*.


For summary information about the configuration, architecture, and features of RETL programs utilized in RMS/ReSA extractions, see the *Oracle Retail Management System Operations Guide Volume 3—Backend Configuration and Operations*. For more information about the RETL tool, see the current *RETL Programmer's Guide*.

### Legend

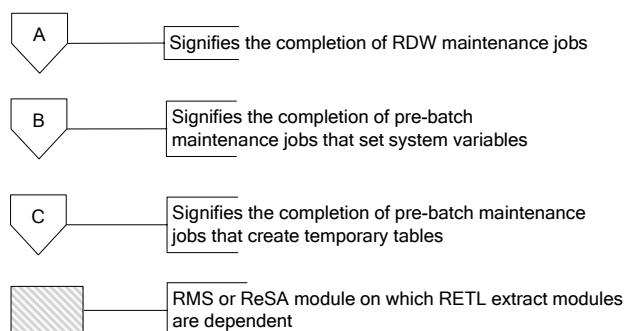


**Note:**  
The modules in this flow are RDW RETL scripts. If the retailer uses RDW, this flow must be completed before starting the pre-batch maintenance flow. If the retailer does not use RDW, these jobs are not required.

### RDW Maintenance

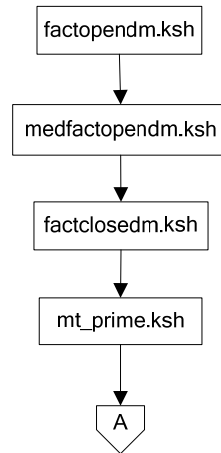


### Pre-Batch Maintenance

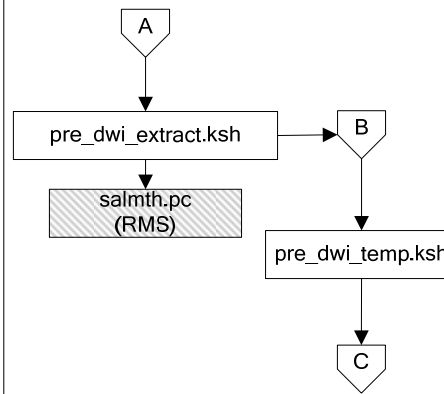


**Note:**  
salmth.pc resets the last eom\_date. Thus, it must be run after the system indicator is extracted by pre\_dwi\_extract.ksh.


### Post-Batch Maintenance

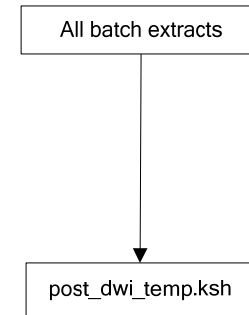


# Dimension Dataflows

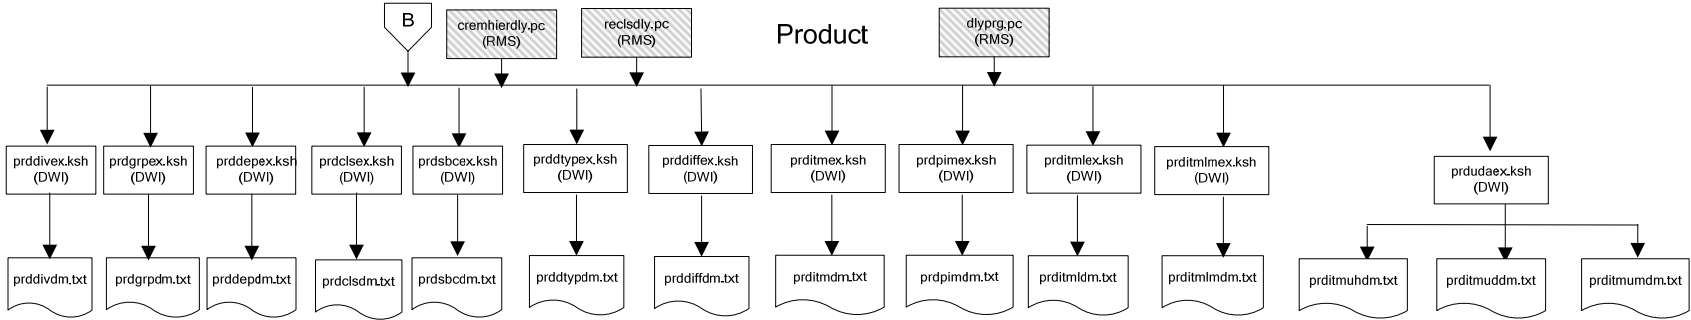


### Dimension Dataflows

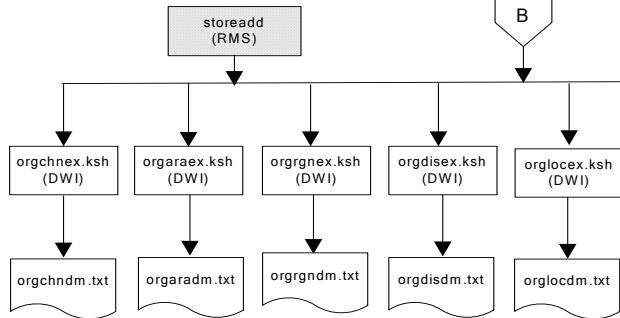


### Organization

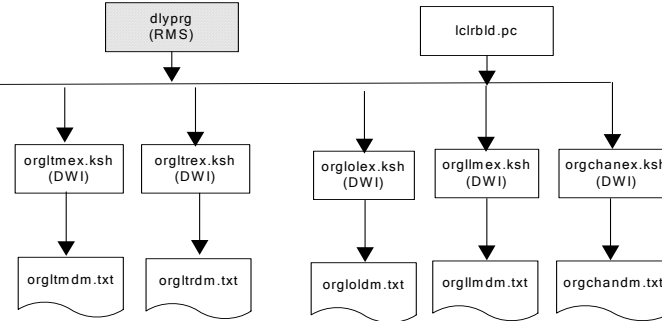


### Supplier Dimension

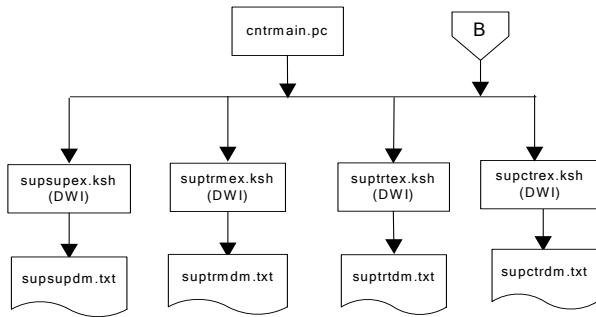


### Item-Supplier-Location Matrix Dimension



### Item-Supplier Dimension




## Dimension Dataflows

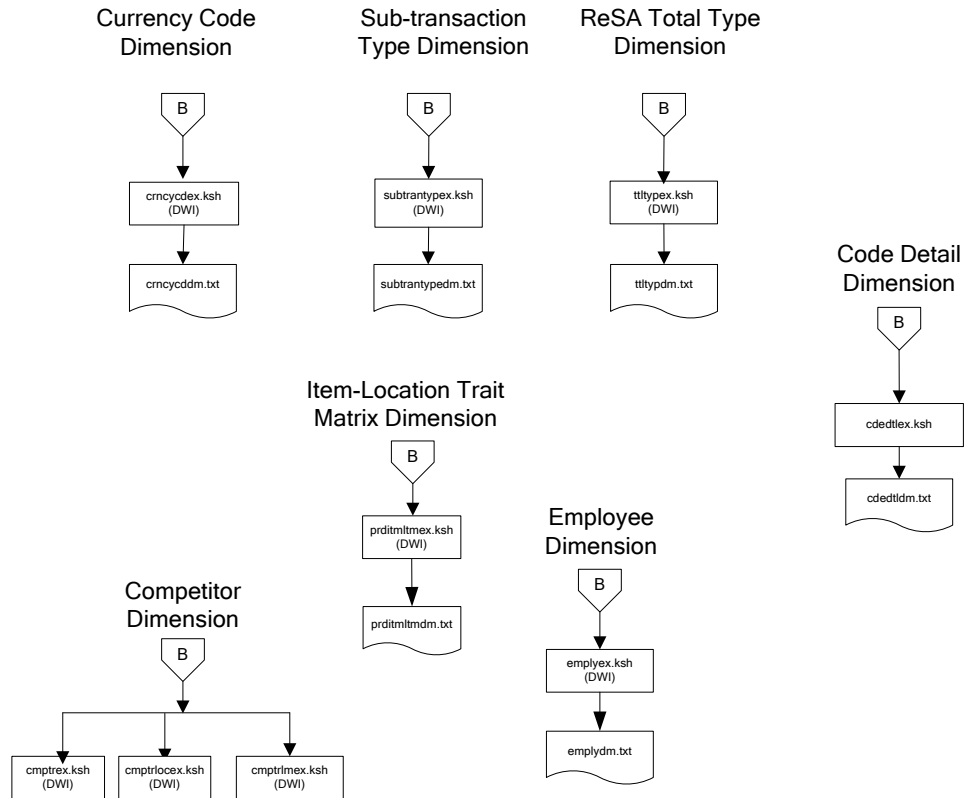


### Dimension Dataflows


#### Product Season Dimension

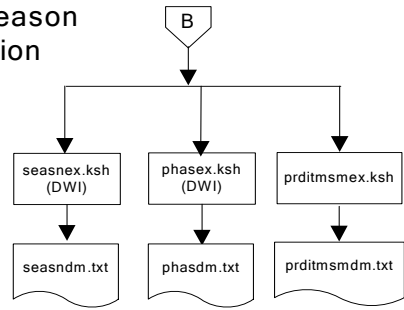


#### Tender Type Dimension

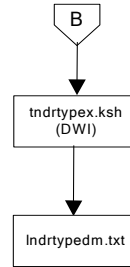



#### Reason Dimension

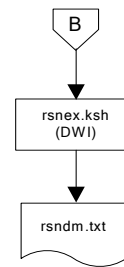

#### Regionality Dimension

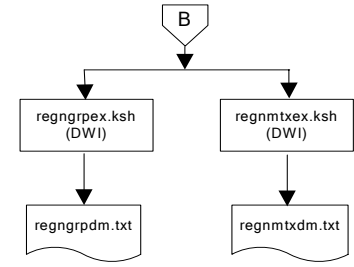


### Fact Dataflows

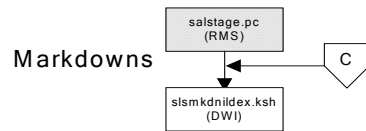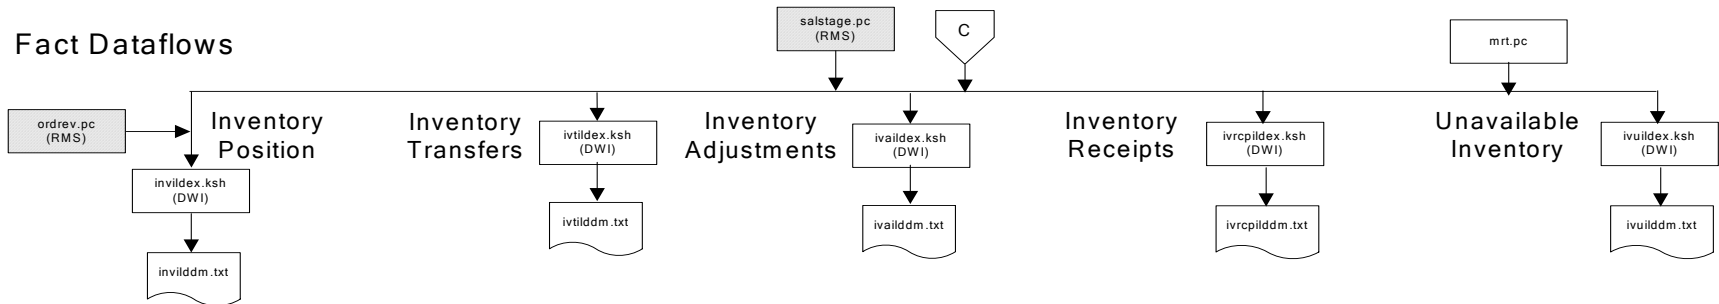




## Fact Dataflows


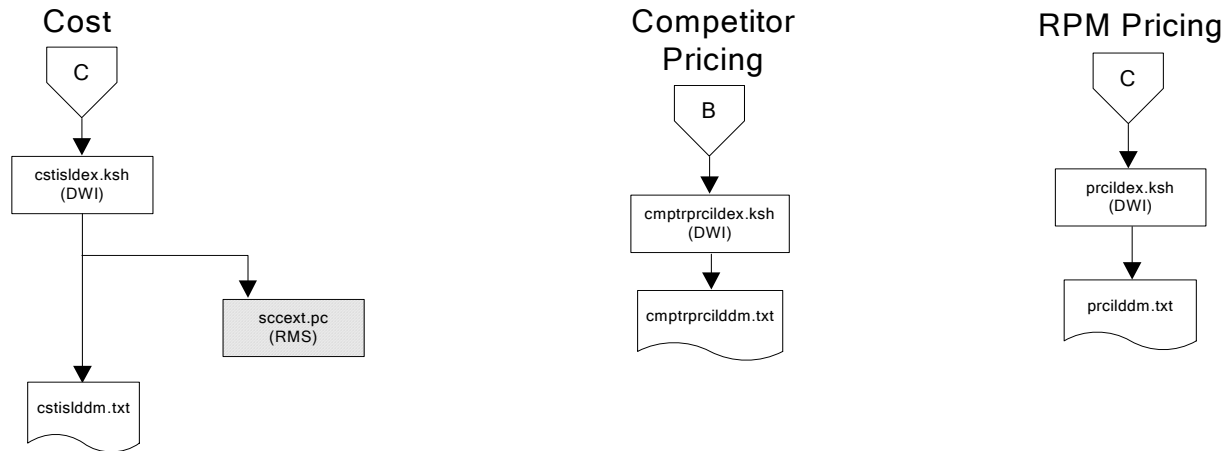


## Stock Ledger

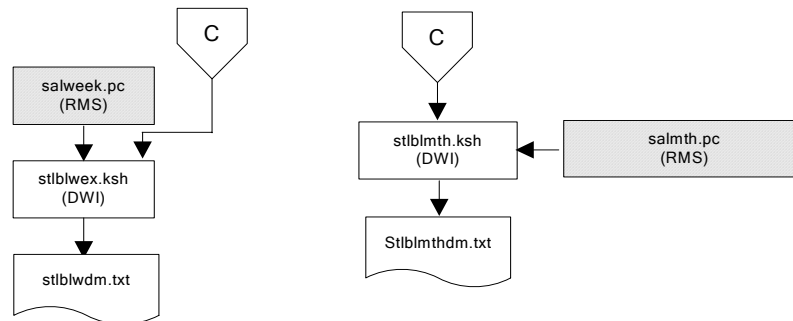


**Note:**  
Run stock ledger fact loads once weekly.


# Fact Dataflows

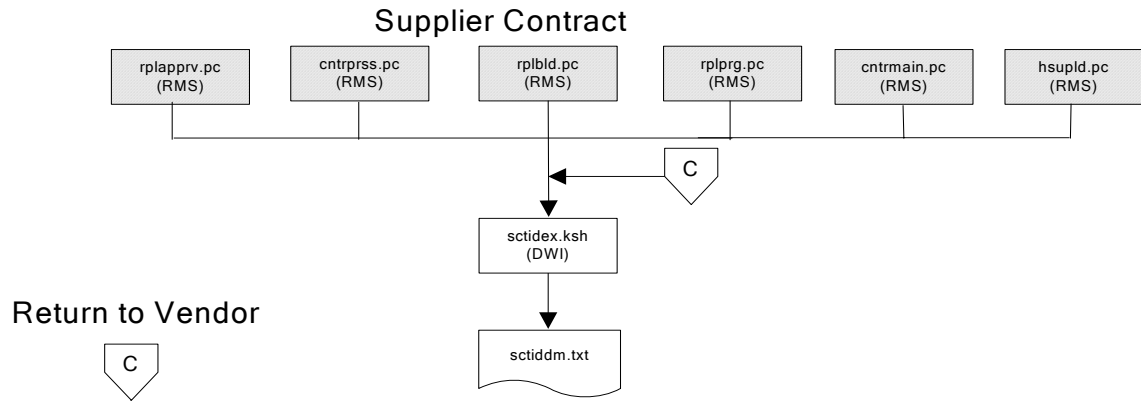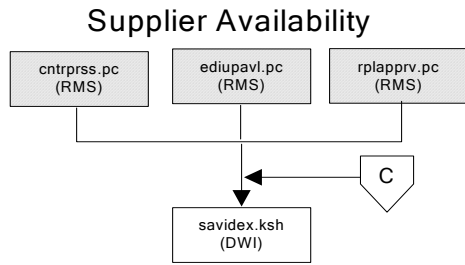

### Return to Vendor

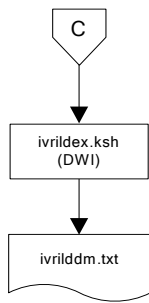


### Net Cost

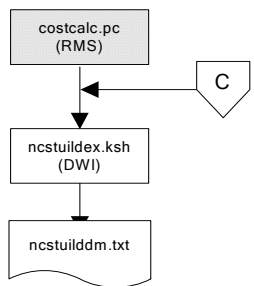


## Fact Dataflows

### Exchange Rates

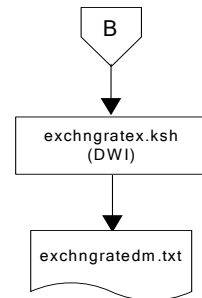


### Sales Forecasts

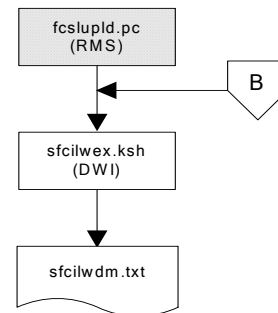


**Note:**  
Run sales forecast fact loads  
once weekly.

## Fact Dataflows

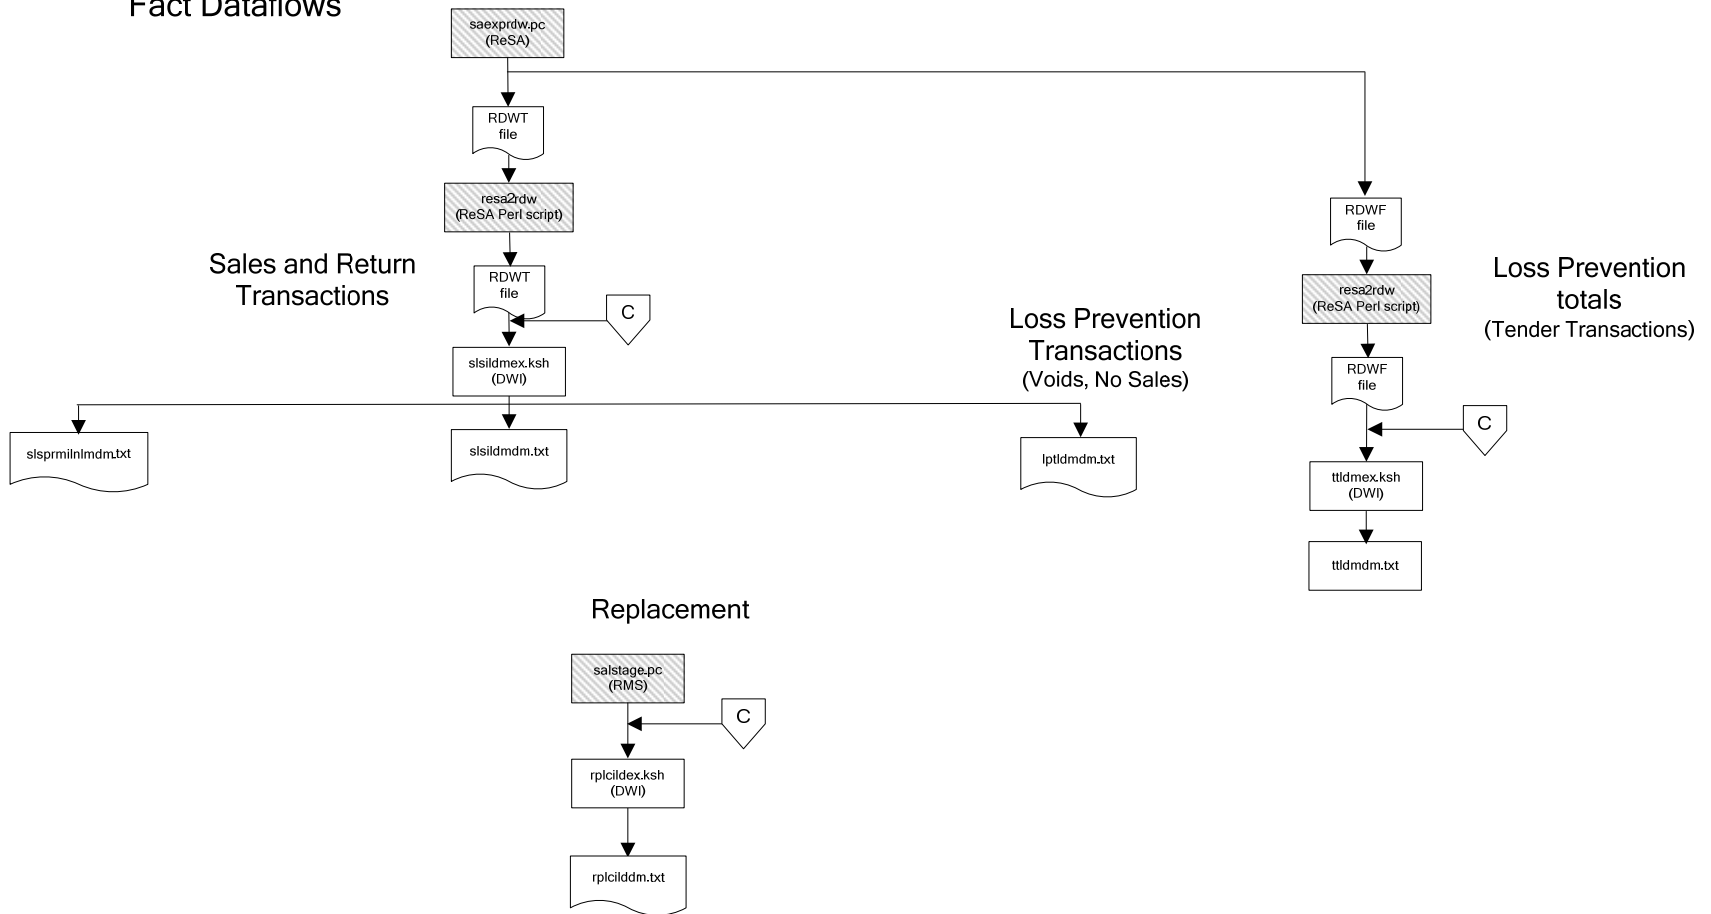


# Fact Dataflows

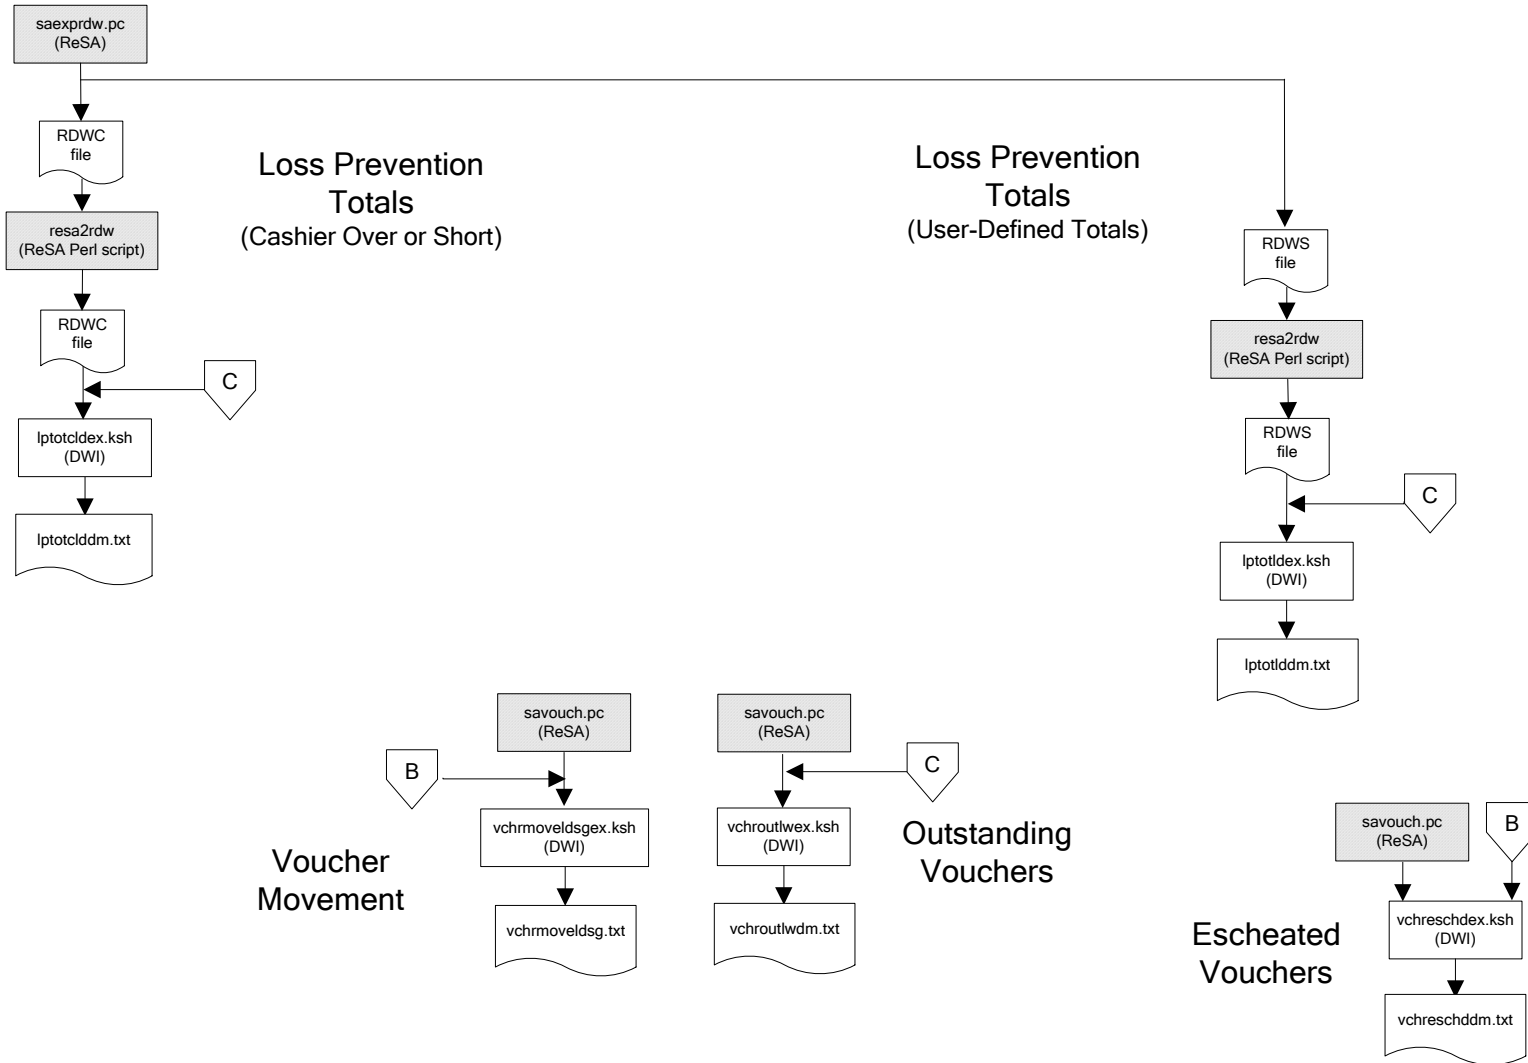

# Fact Dataflows

## Supplier Compliance

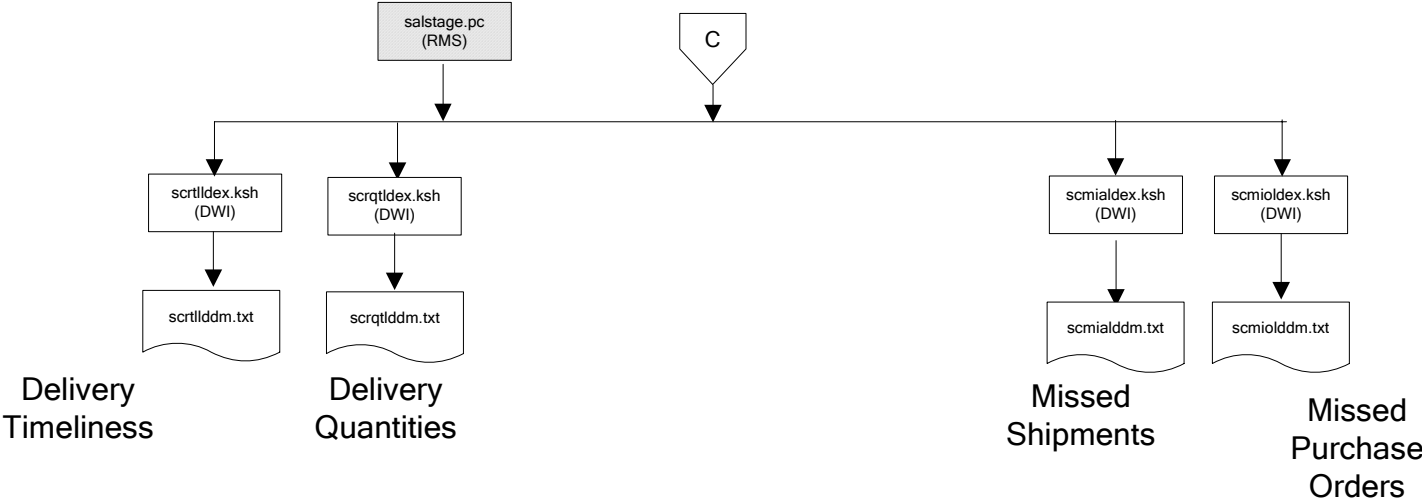


## Interface Diagram for RPM and RDW

This following program flow diagram shows the RETL extraction program that extracts the Promotion dimension from RPM through the Data Warehouse Interface (DWI). The diagram shows the output files and the scripts that interface with the source. Note that the outputs are based on the logic (dimension data and table data) of Oracle Retail Data Warehouse (RDW), but you can use the data to suit your business needs.


For detailed information about dimensions and facts, see the *Oracle Retail Data Warehouse Operations Guide*.


See the *Oracle Retail Merchandising System Operations Guide Volume 1—Batch Overviews and Designs* for more information about the modules shown in the following diagram.

### Legend

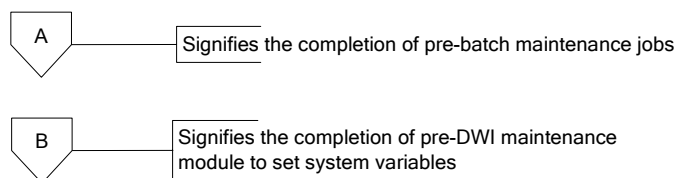

### Program Flow Diagram

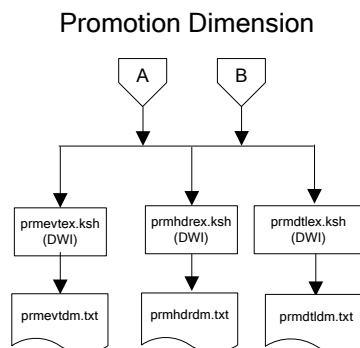

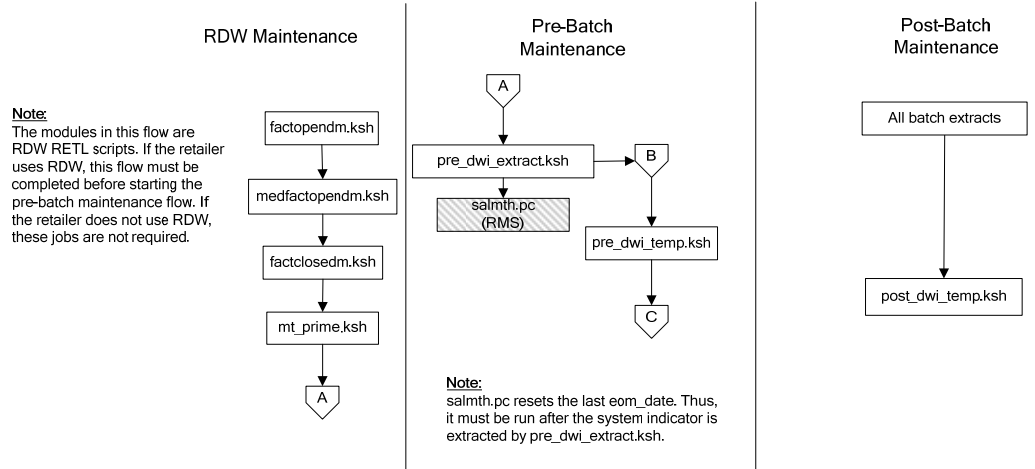




## Interface Diagram for ReIM and RDW

This following program flow diagram shows the RETL extraction program that extracts the Promotion dimension from ReIM through the Data Warehouse Interface (DWI). The diagram shows the output files and the scripts that interface with the source. Note that the outputs are based on the logic (dimension data and table data) of Oracle Retail Data Warehouse (RDW), but you can use the data to suit your business needs.


For detailed information about dimensions and facts, see the *Oracle Retail Data Warehouse Operations Guide*.


See the *Oracle Retail Merchandising System Operations Guide Volume 1—Batch Overviews and Designs* for more information about the modules shown in the following diagram.

### Legend

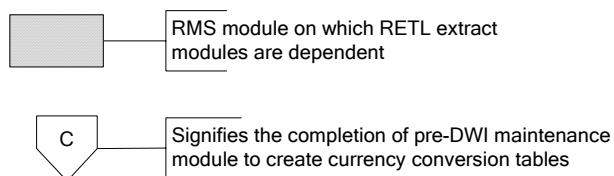

### Program Flow Diagram



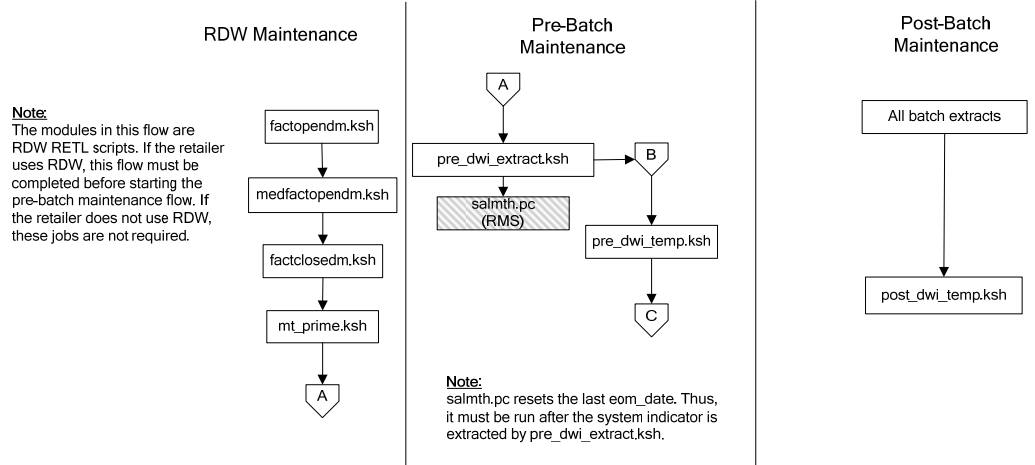

---

---


## Interface Diagrams for RMS and AIP

This chapter presents flow diagrams for RETL extract data processing from RMS to AIP. The RMS program or output file is illustrated, along with the program or process that interfaces with the source. The diagrams illustrate the flow of the data after initial interface processing of the source.


Before setting up a program schedule, familiarize yourself with the functional and technical constraints associated with each program. See the *Oracle Retail Merchandising System Operations Guide Volume 1—Batch Overviews and Designs* for more information about the modules shown in the following diagrams.

## RMS Pre/Post Extract Diagrams


### RMS Pre RETL Extract Maintenance

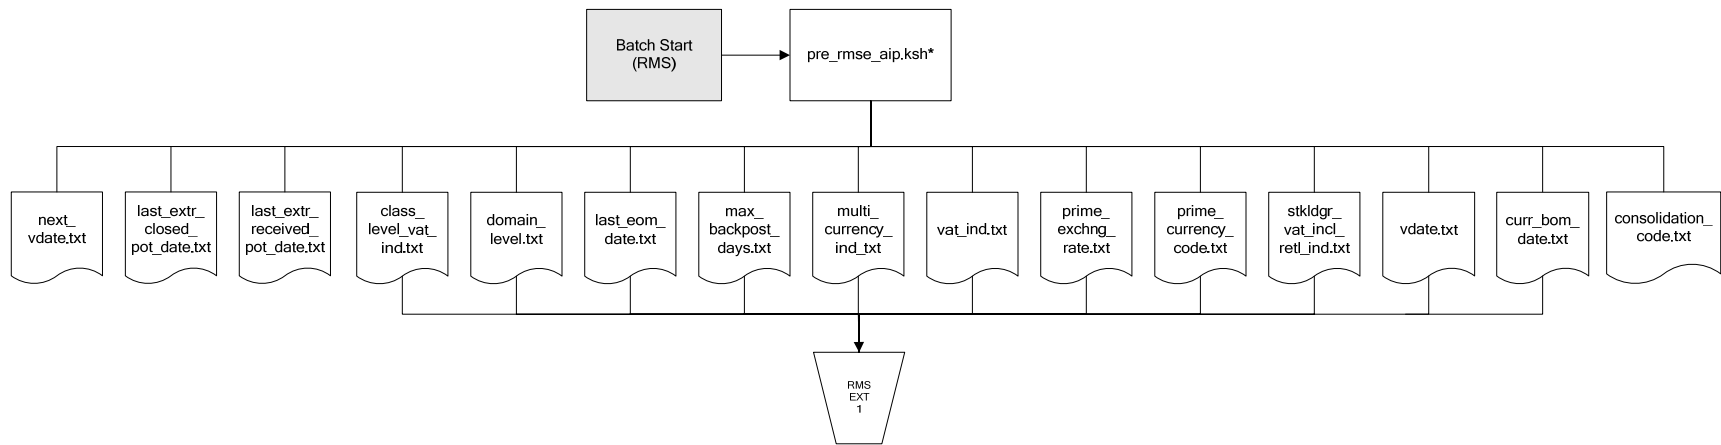


## RMS Foundation Data Extract Diagrams

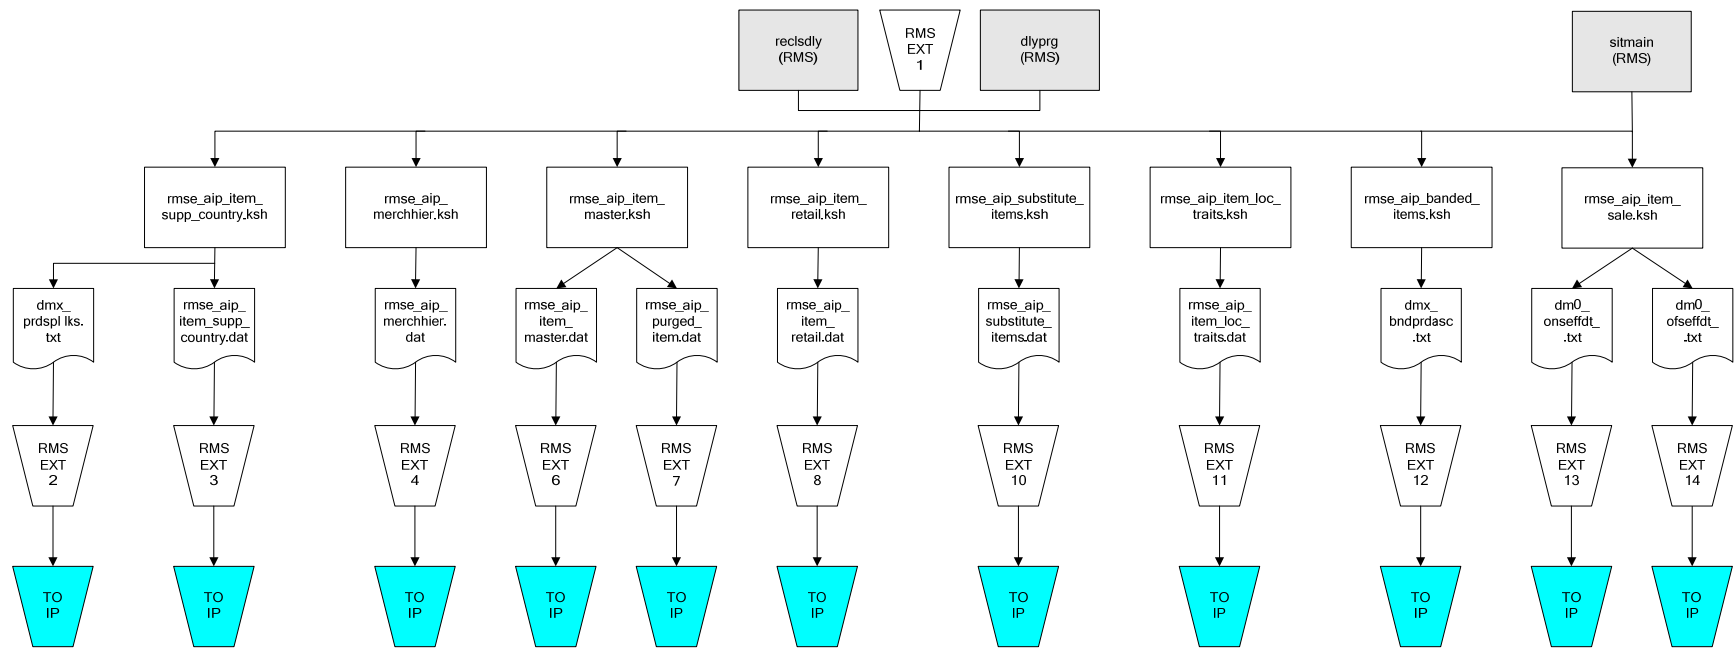


IP = Time-phased inventory planning tool

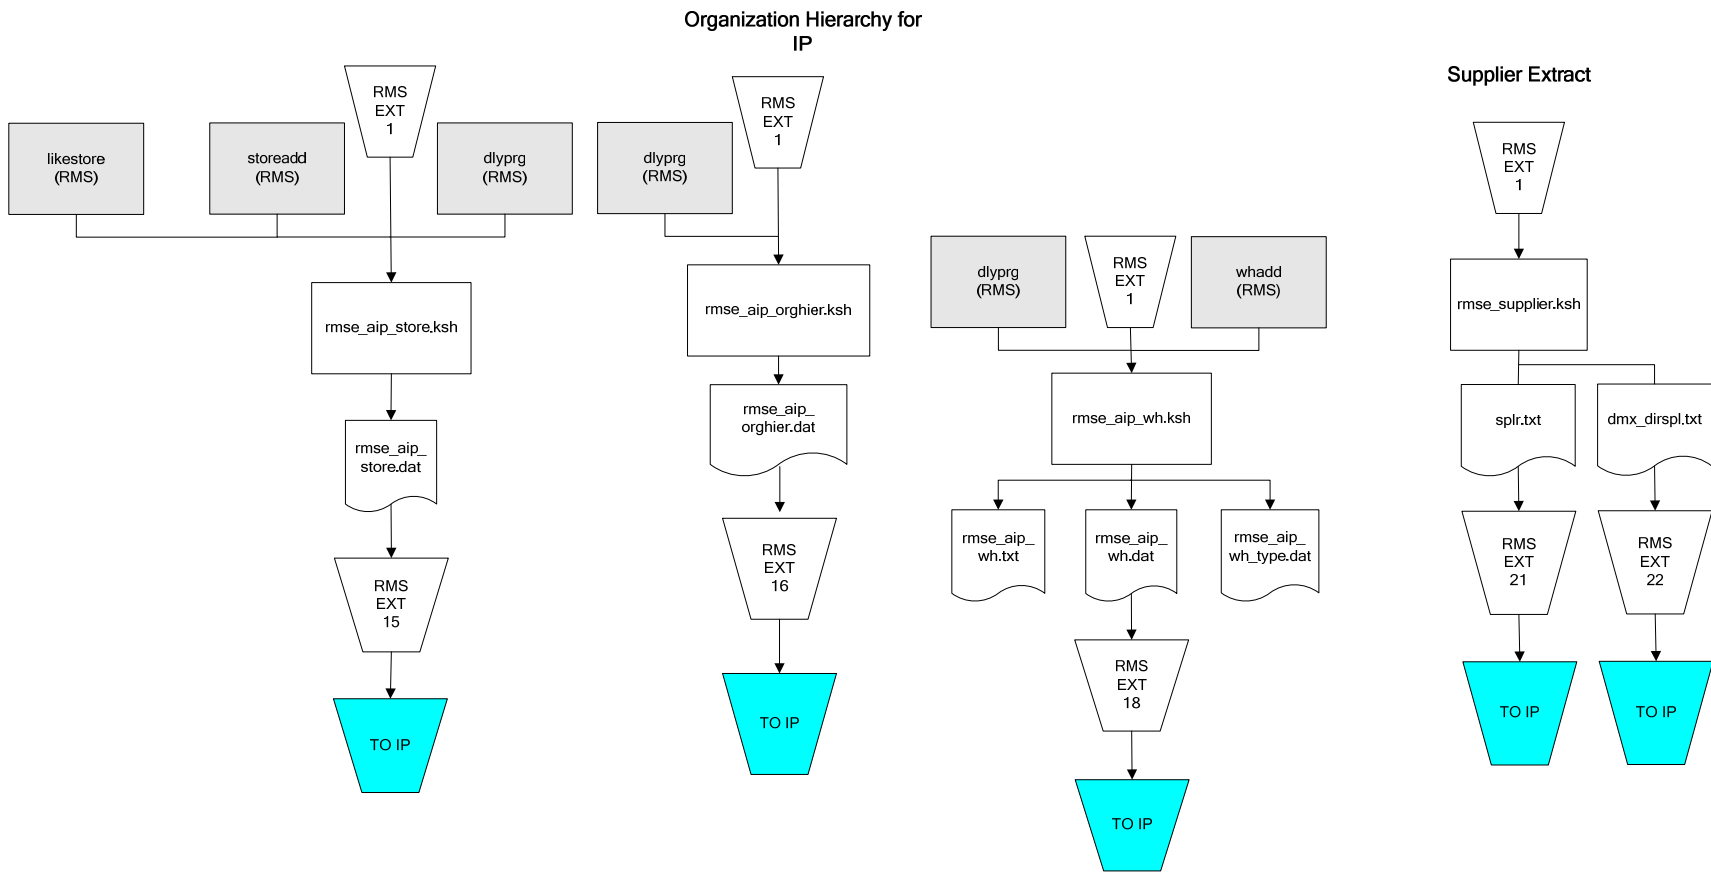

IP = Time-phased inventory planning tool

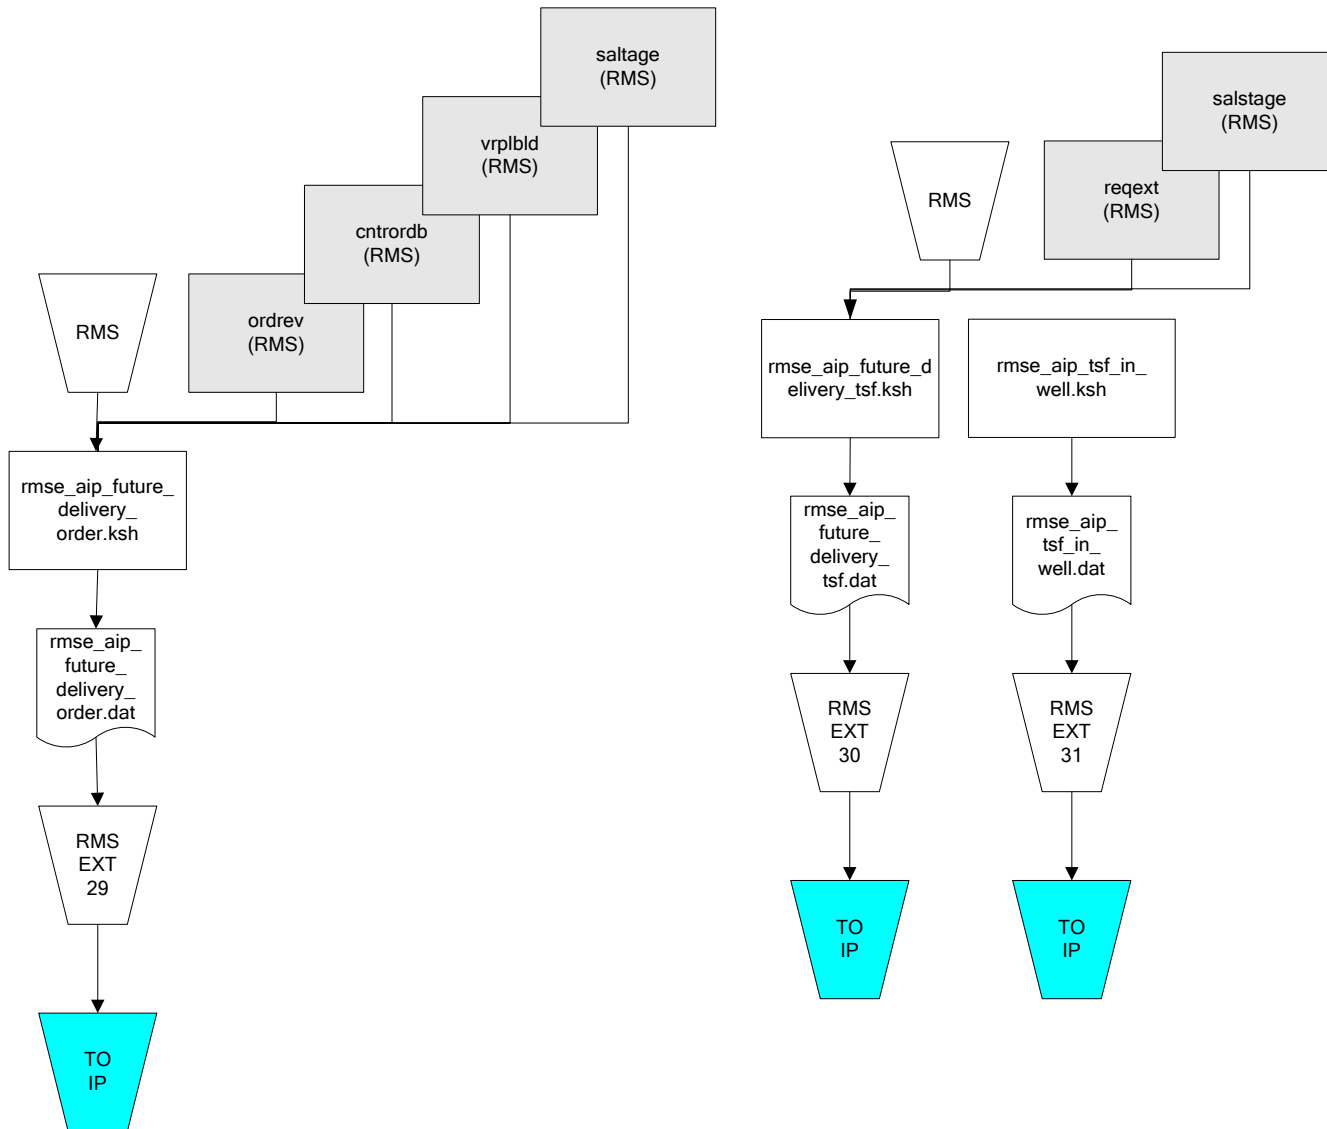


IP = Time-phased inventory planning tool

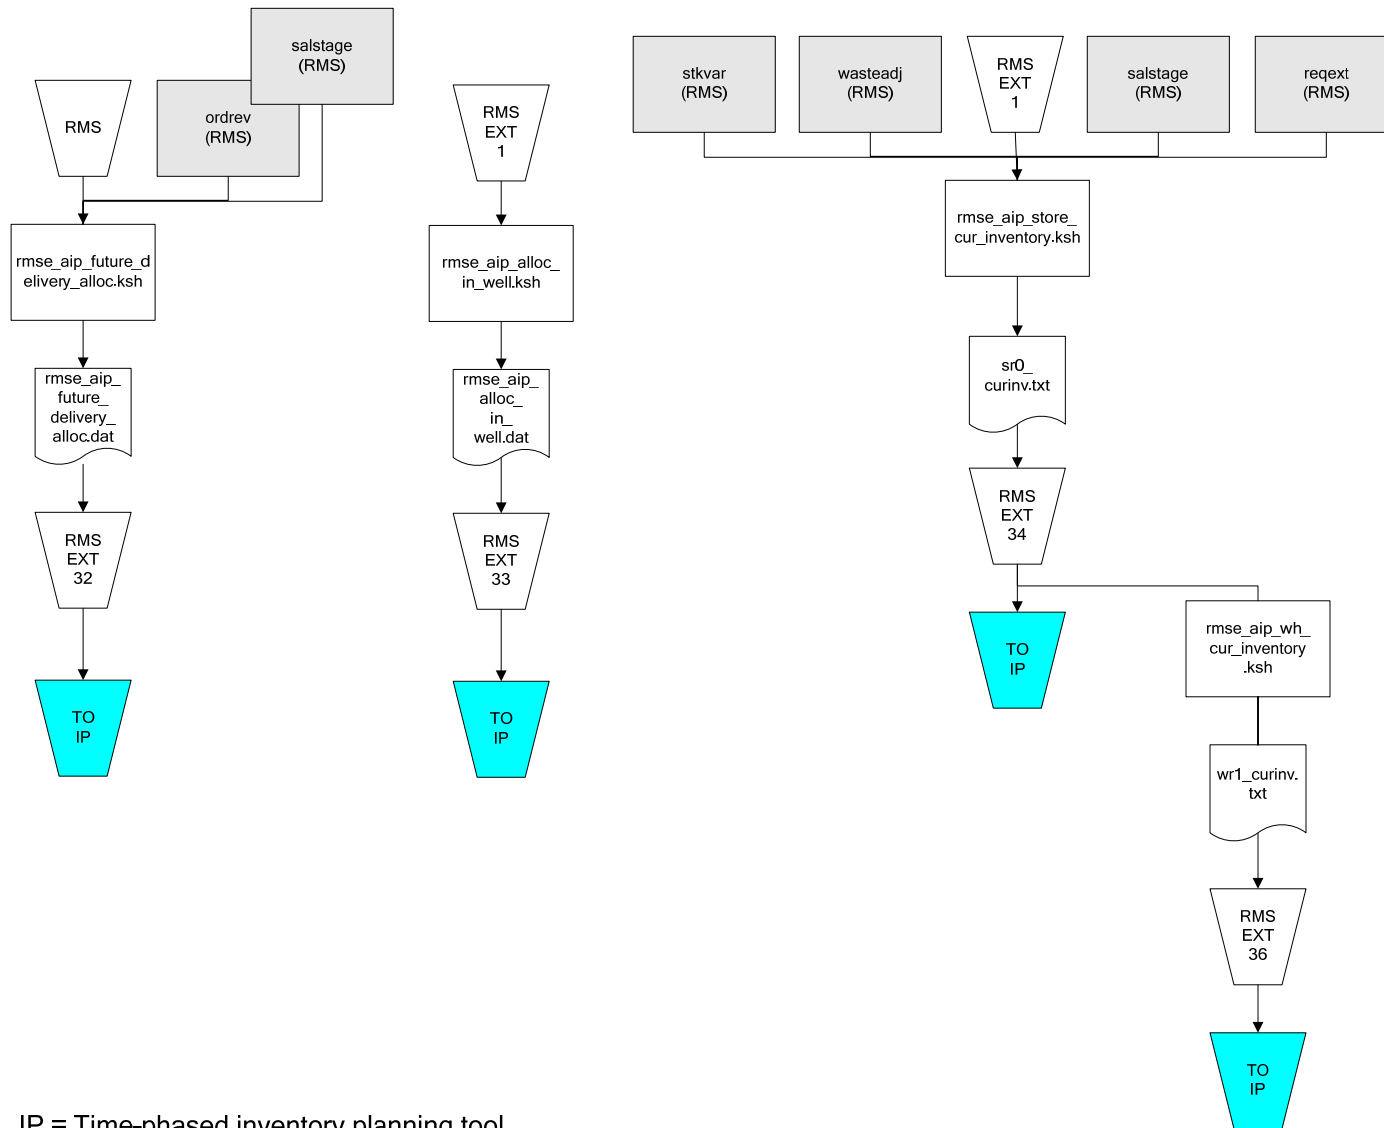

IP = Time-phased inventory planning tool



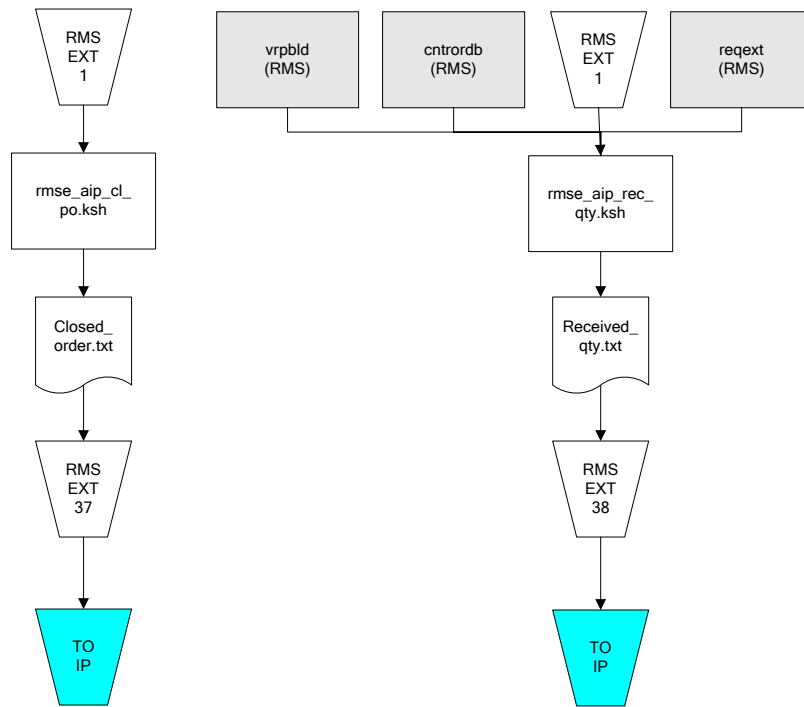

IP = Time-phased inventory planning tool