Oracle® Retail Merchandising

Batch Schedule
Release 13.1.3.4
E38604-02

December 2012

ORACLE

Oracle® Retail Merchandising Batch Schedule, Release 13.1.3.4

Copyright © 2012, Oracle and/or its affiliates. All rights reserved.

Primary Author: Kris Lange

The Programs (which include both the software and documentation) contain proprietary information; they are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright, patent, and other intellectual and industrial property laws. Reverse engineering, disassembly, or decompilation of the Programs, except to the extent required to obtain interoperability with other independently created software or as specified by law, is prohibited.

The information contained in this document is subject to change without notice. If you find any problems in the documentation, please report them to us in writing. This document is not warranted to be error-free. Except as may be expressly permitted in your license agreement for these Programs, no part of these Programs may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose.

If the Programs are delivered to the United States Government or anyone licensing or using the Programs on behalf of the United States Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the Programs, including documentation and technical data, shall be subject to the licensing restrictions set forth in the applicable Oracle license agreement, and, to the extent applicable, the additional rights set forth in FAR 52.227-19, Commercial Computer Software—Restricted Rights (June 1987). Oracle Corporation, 500 Oracle Parkway, Redwood City, CA 94065

The Programs are not intended for use in any nuclear, aviation, mass transit, medical, or other inherently dangerous applications. It shall be the licensee's responsibility to take all appropriate fail-safe, backup, redundancy and other measures to ensure the safe use of such applications if the Programs are used for such purposes, and we disclaim liability for any damages caused by such use of the Programs.

Oracle, JD Edwards, PeopleSoft, and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

The Programs may provide links to Web sites and access to content, products, and services from third parties. Oracle is not responsible for the availability of, or any content provided on, third-party Web sites. You bear all risks associated with the use of such content. If you choose to purchase any products or services from a third party, the relationship is directly between you and the third party. Oracle is not responsible for: (a) the quality of third-party products or services; or (b) fulfilling any of the terms of the agreement with the third party, including delivery of products or services and warranty obligations related to purchased products or services. Oracle is not responsible for any loss or damage of any sort that you may incur from dealing with any third party.

Value-Added Reseller (VAR) Language

Oracle Retail VAR Applications

The following restrictions and provisions only apply to the programs referred to in this section and licensed to you. You acknowledge that the programs may contain third party software (VAR applications) licensed to Oracle. Depending upon your product and its version number, the VAR applications may include:

(i) the software component known as **ACUMATE** developed and licensed by Lucent Technologies Inc. of Murray Hill, New Jersey, to Oracle and imbedded in the Oracle Retail Predictive Application Server – Enterprise Engine, Oracle Retail Category Management, Oracle Retail Item Planning, Oracle Retail Merchandise Financial Planning, Oracle Retail Advanced Inventory Planning, Oracle Retail Demand Forecasting, Oracle Retail Regular Price Optimization, Oracle Retail Size Profile Optimization, Oracle Retail Replenishment Optimization applications.

(ii) the **MicroStrategy** Components developed and licensed by MicroStrategy Services Corporation (MicroStrategy) of McLean, Virginia to Oracle and imbedded in the MicroStrategy for Oracle Retail Data Warehouse and MicroStrategy for Oracle Retail Planning & Optimization applications.

(iii) the **SeeBeyond** component developed and licensed by Sun MicroSystems, Inc. (Sun) of Santa Clara, California, to Oracle and imbedded in the Oracle Retail Integration Bus application.

(iv) the **Wavelink** component developed and licensed by Wavelink Corporation (Wavelink) of Kirkland, Washington, to Oracle and imbedded in Oracle Retail Mobile Store Inventory Management.

(v) the software component known as **Crystal Enterprise Professional and/or Crystal Reports Professional** licensed by SAP and imbedded in Oracle Retail Store Inventory Management.

(vi) the software component known as **Access Via™** licensed by Access Via of Seattle, Washington, and imbedded in Oracle Retail Signs and Oracle Retail Labels and Tags.

(vii) the software component known as **Adobe Flex™** licensed by Adobe Systems Incorporated of San Jose, California, and imbedded in Oracle Retail Promotion Planning & Optimization application.

(viii) the software component known as **Style Report™** developed and licensed by InetSoft Technology Corp. of Piscataway, New Jersey, to Oracle and imbedded in the Oracle Retail Value Chain Collaboration application.

(ix) the software component known as **DataBeacon™** developed and licensed by Cognos Incorporated of Ottawa, Ontario, Canada, to Oracle and imbedded in the Oracle Retail Value Chain Collaboration application.

You acknowledge and confirm that Oracle grants you use of only the object code of the VAR Applications. Oracle will not deliver source code to the VAR Applications to you. Notwithstanding any other term or condition of the agreement and this ordering document, you shall not cause or permit alteration of any VAR Applications. For purposes of this section, "alteration" refers to all alterations, translations, upgrades, enhancements, customizations or modifications of all or any portion of the VAR Applications including all reconfigurations, reassembly or reverse assembly, re-engineering or reverse engineering and recompilations or reverse compilations of the VAR Applications or any derivatives of the VAR Applications. You acknowledge that it shall be a breach of the agreement to utilize the relationship, and/or confidential information of the VAR Applications for purposes of competitive discovery.

The VAR Applications contain trade secrets of Oracle and Oracle's licensors and Customer shall not attempt, cause, or permit the alteration, decompilation, reverse engineering, disassembly or other reduction of the VAR Applications to a human perceivable form. Oracle reserves the right to replace, with functional equivalent software, any of the VAR Applications in future releases of the applicable program.

Contents

Send Us Your Comments

Oracle Retail Merchandising Batch Schedule, Release 13.1.3.4

Oracle welcomes customers' comments and suggestions on the quality and usefulness of this document.

Your feedback is important, and helps us to best meet your needs as a user of our products. For example:

- Are the implementation steps correct and complete?
- Did you understand the context of the procedures?
- Did you find any errors in the information?
- Does the structure of the information help you with your tasks?
- Do you need different information or graphics? If so, where, and in what format?
- Are the examples correct? Do you need more examples?

If you find any errors or have any other suggestions for improvement, then please tell us your name, the name of the company who has licensed our products, the title and part number of the documentation and the chapter, section, and page number (if available).

> **Note:** Before sending us your comments, you might like to check that you have the latest version of the document and if any concerns are already addressed. To do this, access the new Applications Release Online Documentation CD available on My Oracle Support and www.oracle.com. It contains the most current Documentation Library plus all documents revised or released recently.

Send your comments to us using the electronic mail address: retail-doc_us@oracle.com

Please give your name, address, electronic mail address, and telephone number (optional).

If you need assistance with Oracle software, then please contact your support representative or Oracle Support Services.

If you require training or instruction in using Oracle software, then please contact your Oracle local office and inquire about our Oracle University offerings. A list of Oracle offices is available on our Web site at www.oracle.com.

Preface

This batch schedule document details the integrated cyclical processing schedules for the Oracle Retail Merchandising applications:

- Oracle Retail Merchandising System (RMS)
- Oracle Retail Invoice Matching (ReIM)
- Oracle Retail Price Management (RPM)
- Oracle Retail Sales Audit (ReSA)
- Oracle Retail Trade Management (RTM)
- Oracle Retail Allocation

> **Note:** Although Oracle Retail Allocation is a Merchandising application, it is not represented in this batch schedule because it does not have any batch programs to run. All Allocation processing is online processing.

This guide describes the periodic and ad hoc phases of batch processing, as well as pre- and post-processing dependencies.

Audience

The audiences for this guide are as follows:

- Systems analysts and system operations personnel who need information about Merchandising processes, internally or in relation to systems across the enterprise
- Integrators and implementation staff who have the overall responsibility for implementing the Merchandising applications in their enterprise

Related Documents

For more information, see the following documents for the Oracle Retail Merchandising products:

- *Oracle Retail Data Warehouse Operations Guide*
- *Oracle Retail Invoice Matching Operations Guide*
- *Oracle Retail Merchandising System Operations Guide*
- *Oracle Retail Price Management Operations Guide*

Customer Support

To contact Oracle Customer Support, access My Oracle Support at the following URL:

https://support.oracle.com

When contacting Customer Support, please provide the following:

- Product version and program/module name
- Functional and technical description of the problem (include business impact)
- Detailed step-by-step instructions to re-create
- Exact error message received
- Screen shots of each step you take

Review Patch Documentation

When you install the application for the first time, you install either a base release (for example, 13.1) or a later patch release (for example, 13.1.2). If you are installing the base release and additional patch and bundled hot fix releases, read the documentation for all releases that have occurred since the base release before you begin installation. Documentation for patch and bundled hot fix releases can contain critical information related to the base release, as well as information about code changes since the base release.

Oracle Retail Documentation on the Oracle Technology Network

Documentation is packaged with each Oracle Retail product release. Oracle Retail product documentation is also available on the following Web site:
http://www.oracle.com/technology/documentation/oracle_retail.html

(Data Model documents are not available through Oracle Technology Network. These documents are packaged with released code, or you can obtain them through My Oracle Support.)

Documentation should be available on this Web site within a month after a product release.

Conventions

Navigate: This is a navigate statement. It tells you how to get to the start of the procedure and ends with a screen shot of the starting point and the statement "the Window Name window opens."

```
This is a code sample
    It is used to display examples of code
```

1

Introduction to Merchandising Batch Processing

This chapter is a brief introduction to Oracle Retail batch processing. It defines basic terms and concepts, describes batch processing phases, and explains how to interpret the batch schedule diagram and program list.

Batch Processing

Batch processing is the execution of a group of batch programs (jobs). The results are returned without user intervention. Batch programs are commonly used for the following reasons:

- To process large volumes of transaction data
- To interface with external systems
- To perform internal maintenance

Batch programs can process very large quantities of data quickly and efficiently. Batch programs can perform some updates that could be performed through online transactions, but much more quickly and with less impact on system performance. Batch processing is usually scheduled for times when systems are idle or least busy.

Batch programs can be run automatically using batch scheduler software. The batch scheduler allows batch jobs to be set up in a specific order, with restrictions attached to any program as needed. If an error occurs with a batch program, an administrator must correct the error and manually rerun the batch program that failed.

Types of Batch Programs

Oracle Retail batch programs are of several types:

- Upload programs bring data from external systems into the Oracle Retail database. For example, the posupld program uploads daily transactions that occur at the point of sale (POS) for processing by the Oracle Retail Management System (RMS).
- Download programs extract data from RMS and format it so it can be used by external systems. For example, the posdnld program extracts new and changed information about an item/location for downloading to the point of sale.
- System maintenance programs perform tasks such as updating the system date. For example, the dtesys program increments the system date at the end of each batch cycle.
- Functional maintenance programs process data specific to a functional area. For example, the storeadd program updates a number of tables to create entries for a new store.

Batch Window

Because of the impact on production systems, it is not always possible to run batch programs during business hours; however, there is a window of opportunity during each day or night when online systems are not being used. This time frame is the *batch window*. For example, a retailer with stores throughout the continental U.S. might require its online systems to be available from 8 AM Eastern Standard Time, when its East Coast offices open, until 9 PM Pacific Standard Time, when its West Coast stores close. This allows an eight-hour batch window for processing all batch jobs.

Batch Schedule and Phases

Order is critical when running batch programs. Some tasks need to be performed before others. A batch schedule ensures that every time batch processing is performed, the correct tasks are performed in the proper order.

The batch schedule is a diagram that represents all batch programs and how they are sequenced. For each individual user, the schedule is a suggested starting point for the installation. Some programs are specific to products that may not be installed, so these programs may not be used at all.

The total batch schedule is divided into phases. Each phase must be completed before the next phase can begin. Within a phase, there may also be programs that depend on the completion of another program within that phase, so programs within each phase may need to be run in a particular order.

Merchandising Batch Schedule

The integrated Merchandising batch schedule combines the batch schedules of all Merchandising applications into a single schedule diagram. The diagram (later in this document) shows the batch dependencies among the Merchandising applications.

The integrated Merchandising batch schedule combines the batch modules for the following applications:

- Oracle Retail Merchandising System (RMS)
- Oracle Retail Trade Management (RTM)
- Oracle Retail Sales Audit (ReSA)
- Oracle Retail Invoice Matching (ReIM)
- Oracle Retail Price Management (RPM)

> **Note:** Although Oracle Retail Allocation is a Merchandising application, it is not represented in this batch schedule because it does not have any batch programs to run. All Allocation processing is online processing.

Program List

The columns of the program list provide details about each batch program, as follows:

Column	Description
Program name	Name of the program or script
Functional area	Functional area of the application for which the batch program is run
Threaded	Whether the program is threaded (Y/N)
Driver	Program driver
Phase	Phase during which the program is run (see the batch schedule diagram)
Pre-dependency	Programs that must be completed before the program can be run
Post-dependency	Programs that must be run after the program completes successfully
Timing	How often the program is run (for example, daily, weekly, monthly, ad hoc)
Restart/Recovery	Whether the program uses restart/recovery (R=Yes, N=No)
Run Parameters for Program	Command syntax to run the program

For example, the following shows the information in the program list about an RMS phase 3 program named dealday:

Program Name	dealday
Functional Area	Deals
Threaded	Y
Driver	Location
Phase	3
Pre-dependency	dealinc, dealfinc, prepost dealday pre
Post-dependency	prepost dealday post, salmnth
Timing	Monthly
Restart/Recovery	R
Usage	dealday userid/passwd

The program list is grouped in the following order:

- RMS, RTM, and ReSA programs
- RPM programs
- ReIM programs
- RMS extracts for Retail Predictive Application Server (RPAS)
- RMS extracts for Retail Data Warehouse (RDW)

The extracts for RPAS and RDW are programs that are part of the RMS application.

Batch Schedule Diagram

The batch schedule diagram illustrates the program list pre- and post-dependency details. The layout and notations of the diagram also illustrate required sequences and other processing details. Executing the Merchandising batch processing in the manner diagrammed ensures that all critical dependencies are met.

For ease of setting up a schedule at client site, and also based on logical application dependencies, the diagram is divided into three main sections:

- RMS, RTM, ReIM
- ReSA
- RPM

Later chapters of this document show data flow diagrams for other batch processes:

- Chapter 4 shows the Retail Extract, Transform, and Load (RETL) data flows for the extracts from RMS to RPAS.
- Chapter 5 shows the RETL dimension and fact data flows for the extracts from RMS to Oracle Retail Data Warehouse (RDW).
- Chapter 6 shows the RETL data flow for the Promotion dimension extract from RPM to RDW.
- Chapter 7 shows the RETL data flow for the Supplier Invoice Cost dimension extract from ReIM to RDW.
- Chapter 8 shows the RETL data flows for the extracts from RMS to Oracle Retail Advanced Inventory Planning (AIP).

RMS, ReIM, RTM Section

The first section diagrams the RMS, ReIM, and RTM programs and their dependencies. This section is further divided into phases 0 through 7, ad hoc, and date set batch.

Each phase must be completed before the next phase can begin. Also, a phase may contain programs that depend on other programs within the phase. Programs within each phase may need to run in a particular sequence.

The following are brief descriptions of the Merchandising batch processing phases. Depending on your implementation, some programs and phases may not apply.

Phase	Description
Phase 0	The first phase performs essential table maintenance including: ▪ Daily purges ▪ Updates to currency exchange rates ▪ Updates to value-added tax (VAT) data
Phase 1	This phase prepares the tables for interfacing with external systems in Phase 2. Among other programs, the stock variance (stkvar) batch program is run to update stock counts.
Phase 2	During this phase, information is uploaded from external interfaces, including point of sale (POS) data (posupld batch program).
Phase 3	In this phase, the main RMS processing programs are run for purchasing, ordering, stock ledger, deals, and replenishment.

Phase	Description
Phase 4	This phase pushes data to external sources. Changed system information is rebuilt. Open to buy (OTB) data is updated. Information is sent to the forecasting system.
Phase 5	This phase consists of ReIM process upload programs.
Phase 6	This phase consists of ReIM process roll-up programs.
Phase 7	This phase consists of ReIM process download programs.
Ad Hoc	Ad hoc batch programs can be run at any time. The ad hoc programs have no phase dependencies.
Date Set	The Date Set phase increments the system date and updates other calendar dates. **Note:** The date set phase should be the very last phase to run. Even the ad hoc programs should be run before the date set program.

Read the batch schedule diagram from left to right. In the following example, any of the programs (ediupavl, ediupack, stkvar,ditinsrt, lifstkup, ReceiverAdjustment, DiscrepancyPurge) can start at the same time; however, the stkupld program cannot start until the lifstkup program is successfully completed.

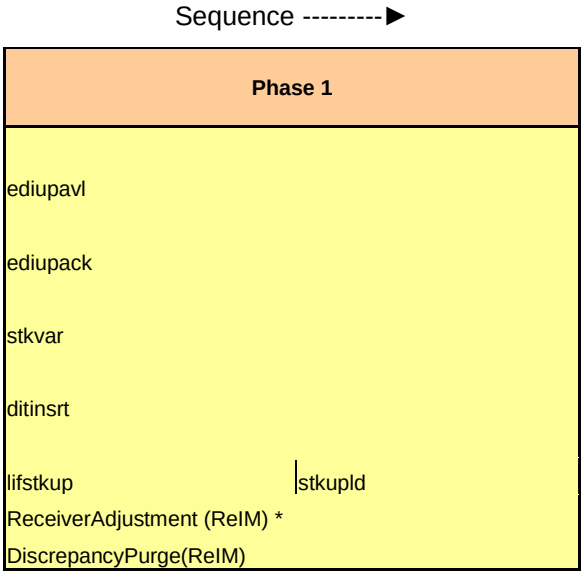

ReSA Section

This section diagrams the ReSA programs and their dependencies.

RPM Section

This section diagrams the RPM programs and their dependencies.

Notations in the Batch Schedule Diagram

Pipes

Pipes are vertical bars (|) that represent the dependencies within a phase. Reading left to right, a pipe indicates that one or more programs to the right depend upon completion of one or more programs to the left.

In the following example, the stkupld module depends on the lifstkup module; that is, the stkupld module can be run only after successful completion of the lifstkup module.

lifstkup	**stukpld**

In the following example, both of the modules cntrordb and reqext are dependent on ociroq. Neither cntrordb nor reqext can be run until the ociroq module has completed successfully.

	cntrordb
ociroq	**reqext**

In the following example, the ibcalc module is dependent on both ibexpl and cntrprss. The ibcalc module cannot be run until both ibexpl and cntrprss have completed successfully.

ibexpl	**ibcalc**
cntrprss	

Abbreviations

In the diagram, abbreviations in parentheses that follow program names have the following meanings:

Abbreviation	Meaning
(perl)	The module is a Perl script.
(FIF)	The module is related to the Financials application.
(sqlldr)	There is a sqlloader process to load/ftp the output files.
(rebuild all)	There is a rebuild process inside the application.
(IM)	The module is related to Invoice Matching but owned by RMS.
(RMS)	The module belongs to RMS.
(RMS)	(Bold type) The RMS module is executed externally to that phase.
(ReSA)	The module belongs to ReSA.
(ReSA)	(Bold type) The ReSA module is executed externally to that phase.
(ReIM)	The module belongs to ReIM.
(RTM)	The module belongs to RTM.
(Weekly)	The module is executed weekly.
(Monthly)	The module is executed monthly.
(Forms Auditing)	This is an online forms auditing process related to ReSA.

Footnotes

Footnote symbols (*, **, †, ‡) refer to footnotes that appear below that phase or section of the diagram.

prepost Program

The prepost program facilitates multi-threading by allowing general system administration functions (such as table deletions or mass updates) to be completed after all threads of a particular program have been processed. The prepost program must be run before, after, or both before and after, programs that require specific processing to run or complete successfully.

In the batch schedule diagram, the prepost program is indicated by "pre" and "post" entries, as in the following examples.

In the following example, preprocessing is required before running the ociroq program.

pre	**ociroq**

In the following example, preprocessing is required before running the stkupd program. Also, post-processing is required after successful completion of the stkupd program.

pre	**stkupd**	**post**

In the following example, post-processing is required after successful completion of the sccext program.

sccext	**post**

Modifications to the Batch Schedule

The integrated Merchandising batch schedule shows the dependencies for all the programs that *could* be run by a retailer. Based on many factors, there will always be some programs that a retailer does not run. Determining which programs, or groups of programs, are not required is a job that should be performed at implementation time.

One major factor involves the applications that the retailer has purchased and wants to install:

- For example, a retailer may have purchased RMS, but not ReIM; in this case, the ReIM programs would not be run.
- Another example is that a retailer may not want to use some functionality within an application. Perhaps a retailer purchased RMS but did not purchase the RDW application. In this case, the retailer may not want to run the programs that extract RMS data to be used later by the RDW application.

These major configuration choices also affect whether some programs are used:

- Whether the Retail Integration Bus (RIB) is used

  For more information about configuring the RIB for Merchandising applications, see "Configuring RPM without the RIB" in the "Backend System Administration and Configuration" chapter of the *Oracle Retail Price Management Operations Guide*.
- Whether full-featured or simplified Retail Price Management (RPM) is used

  For more information about configuring simplified RPM, see the "Backend System Administration and Configuration" chapter in the *Oracle Retail Price Management Operations Guide*.
- Whether full-featured or simplified RTM is used

  For more information about configuring simplified RTM, see the "Oracle Retail Trade Management Batch" chapter in Volume 1 of the *Oracle Retail Merchandising System Operations Guide*.

RMS,RTM,ReSA Program Dependency and Scheduling Details

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
auditprg	Audit	N	N/A	ad hoc	N/A	N/A	daily	N	auditprg userid/passwd
auditsys	Audit	N	N/A	ad hoc	N/A	N/A	daily	N	auditsys userid/passwd
batch_allocts fupd.ksh	Cost Component Updates	Y	Allocation and Transfer	2	batch_compeffupd.ksh	If none of the Cost Component Updates batch are to be run then, prepost batch_costcompupd post.	daily	N	batch_allocts fupd.ksh [-p <# parallel threads>] <connect> <# parallel threads> is the number of threads to run in parallel. The default is the value on RESTART_CONTROL.NUM_THREADS.
batch_compeffupd.ksh	Cost Component Updates	N	NA	2	N/A	If none of the Cost Component Updates batch are to be run then, prepost batch_costcompupd post.	daily	N	batch_compeffupd.ksh <connect>
batch_depchrgupd.ksh	Cost Component Updates	N	N/A	2	batch_compeffupd.ksh	If none of the Cost Component Updates batch are to be run then, prepost batch_costcompupd post.	daily	N	batch_depchrgupd.ksh <connect>
batch_expprofupd.ksh	Cost Component Updates	N	N/A	2	batch_compeffupd.ksh	If none of the Cost Component Updates batch are to be run then, prepost batch_costcompupd post.	daily	N	batch_expprofupd.ksh <connect>
batch_itmcostcompupd.ksh	Cost Component Updates	N	Location, Supplier	2	batch_compeffupd.ksh	If none of the Cost Component Updates batch are to be run then, prepost batch_costcompupd post.	daily	N	batch_itmcostcompupd.ksh [-p <# parallel threads>] <connect> <# parallel threads> is the number of threads to run in parallel. The default is the value on RESTART_CONTROL.NUM_THREADS.
batch_ordcostcompupd.ksh	Cost Component Updates	Y	Order	2	batch_compeffupd.ksh, prepost batch_ordcostcompupd pre	prepost batch_costcompupd post	daily	N	ch_ordcostcompupd.ksh [-p <# parallel threads>] <connect> <# parallel threads> is the number of threads to run in parallel. The default is the value on RESTART_CONTROL.NUM_THREADS.
batch_orpos_extract.ksh	Point of Sale Interface	Y	Store	4	If RPM pricing info is reqd then run after extraction script 'RPMtoORPOSPublishExport.sh'	posdnld (only if generic POS extract is used) prepost posdnld post prepost batch_orpos_extract post poscdnld (only if generic POS coupon extract is used) prepost poscdnld post	daily	N	batch_orpos_extract.ksh userid/passwd [-p <no. of threads>] [DIR - location where extracts are to be generated]
ccprg	Costing	N	N/A	ad hoc	N/A	N/A	monthly	N	ccprg userid/passwd
cednld	Trade Management	Y	Broker	2	N/A	N/A	daily	R	cednld userid/passwd broker file_name
cmpprg	Pricing	N	N/A	ad hoc	N/A	N/A	daily	N	cmpprg userid/passwd
cmpupld	Pricing	N	N/A	ad hoc	N/A	All RPM batch modules	ad hoc	R	cmpupld userid/passwd input_file reject_file
cntrmain	Contracting	N	N/A	0	N/A	All Replenishment modules	daily	R	cntrmain userid/passwd
cntrordb	Contracting	Y	Contract	3	rpladj	prepost cntrordb post	daily	R	cntrordb userid/passwd
cntrprss	Contracting	Y	Dept	3	rplext	rplbld	daily	R	cntrprss userid/passwd
costeventprg.pc	Real Time Costing		Event Type	0	N/A	N/A	daily	R	costeventprg userid/passwd
cremhierdly	Reclassification	N	N/A	4	N/A salstage prepost dealact_nor pre prepost dealact_po pre	reclsdly	daily	R	cremhierdly userid/passwd
dealact	Deals	Y	Deal Id	3	prepost dealact_sales pre	N/A	daily	R	dealact userid/passwd
dealcls	Deals	N	N/A	3	dealinc	prepost dealcls post prepost dealday post	daily	R	dealcls userid/passwd
dealday	Deals	Y	Location	3	dealinc	salmnth	monthly	R	dealday userid/passwd
dealfct	Deals	Y	Deal Id	3		salmth dealfct dealday	daily	R	dealfct userid/passwd [Y/N - EOM processing ind]
dealfinc	Deals	Y	Deal Id	3	dealact dealact	salmth	weekly/ad hoc	R	dealfinc userid/passwd
dealinc	Deals	Y	Deal Id	3	prepost dealinc pre	salmth (if monthly)	monthly	R	dealinc userid/passwd [Y/N -EOM processing ind]
dealprg	Deals	N	N/A	ad hoc	N/A	N/A	monthly	R	dealprg userid/passwd
dealupld	Deals	Y	File-based	0	(This program is the first one in Deals batch)	(All other deals programs)	daily	R	dealupld userid/passwd input_file reject_file
dfrtbld	Item Maintenance	Y	Dept	3	(This program will likely be run after sales information is uploaded into Oracle Retail)	(SQL*Load the output file)	daily	R	dfrtbld userid/passwd outfile
discotbapply	OTB	Y	Dept	4	orddscnt	N/A	daily	R	discotbapply userid/passwd
distropcpub	Pricing/Transfers/Allocation Publish	Y	Store	3	PriceEventExecutionBatch(RPM)	N/A	daily	R	distropcpub userid/passwd
ditinsrt	Deals	N	N/A	1	N/A	orddscnt	daily	R	ditinsrt userid/passwd (P or S) (supplier/partner). P or S = program is either run for deals set up by Partner or Supplier. supplier/partner is selected by appropriate calling script and passed into program. Note: (May use the batch_ditinsrt.ksh for launching this program as it is created based on performance considerations)
dlyprg	Maintenance	N	N/A	0	N/A	(All other batch programs)	daily	N	dlyprg userid/passwd
docclose	Receiving	N	N/A	ad hoc	N/A sastdycr	N/A	daily	R	docclose userid/passwd
dtesys	Calendar	N	N/A	date_set	(This program should run at the end of the batch cycle)	prepost dtesys post	daily	N	dtesys userid/passwd [indate--YYYYMMDD format]
dummyctn	Receiving	N	N/A	ad hoc	N/A	N/A	daily	N	dummyctn userid/passwd
edidladd	Maintenance	N	N/A	ad hoc	N/A	N/A	ad hoc	N	edidladd userid/passwd ediadd_output ediadd_catalog
edidlcon	Contracting	N	N/A	ad hoc	N/A	N/A	ad hoc	N	edidlcon userid/passwd edidlcon_outfile
edidlinv	Invoice Matching	Y	Location	4	N/A ordrev	N/A	daily	R	edidlinv userid/passwd output_filename
edidlord	Ordering	N	N/A	4	(and after replenishment batch)	N/A	ad hoc	R	edidlord userid/passwd filename
edidlprd	EDI Interface - Sales and Inventory	N	N/A	4	prepost edidlprd pre	prepost edidlprd post	daily	R	edidlprd userid/passwd filename
ediprg	EDI Interface - Purge	N	N/A	ad hoc	(Towards the end of the batch cycle)	N/A	monthly	R	ediprg userid/passwd
ediupadd	Maintenance	N	File-based	2	N/A	N/A	daily	N	ediupadd userid/passwd input_file reject_file
ediupack	EDI Interface - ordering	N	N/A	1	N/A	N/A	ad hoc	R	ediupack userid/passwd data_file reject_file
ediupavl	EDI Interface - Contracts	N	File-based	1	N/A	N/A	daily	R	ediupavl userid/passwd input_file reject_file
ediupcat	EDI Interface - Suppliers	N	File-based	ad hoc	N/A	N/A	daily	R	ediupcat userid/passwd edi_data_file error_file
elcexcprg	Cost Component Updates	N	N/A	2	N/A fcthreadexec	N/A	ad hoc	N	elcexcprg userid/passwd
fcexec	Real Time Costing	Y	Cost Event Process Id	2	prepost fcexec pre	N/A	daily/ad hoc	N	fcexec userid/passwd
fcthreadexec	Real Time Costing	Y	Cost Event Process Id	2	batch_itmcostcompupd.ksh	N/A	daily/ad hoc	N	fcthreadexec userid/passwd
fcstprg	Forecasting	Y	Domain Id	ad hoc	prepost fcstprg pre	prepost fcstprg post	daily	N	fcstprg userid/passwd domain
fcstrbld	Forecasting	Y	Domain Id	3	N/A	prepost fcstrbld post	weekly	R	fcstrbld userid/passwd
fcstrbld_sbc	Forecasting	Y	Domain Id	3	prepost fcstrbld post salstage	N/A	weekly	R	fcstrbld_sbc userid/passwd
fifgldn1	Financial Interface	Y	Dept	3		prepost fifgldn1 post salapnd	daily	R	fifgldn1 userid/passwd
fifgldn2	Financial Interface	Y	Dept	3	salstage	salapnd	daily	R	fifgldn2 userid/passwd
fifgldn3	Financial Interface	Y	Store/Wh	3	salmth	N/A	monthly	R	fifgldn3 userid/passwd
ftmednld	Planing System Interface	N	N/A	ad hoc	N/A	N/A	ad hoc	R	ftmednld userid/passwd
gcupld	Misc Interface - Taxgeocode	N	N/A	ad hoc	N/A	N/A	ad hoc	R	gcupld <username/password@environment> <infile> <outfile>
genpreiss	Ordering	Y	Supplier	ad hoc	N/A	N/A	ad hoc	R	genpreiss userid/passwd
gradupld	Forecasting	N	File-based	ad hoc	N/A posupld	N/A	ad hoc	R	gradupld userid/passwd input_file rej_file
hstbld	Sales	Y	Location	3	prepost hstbld pre (for rebuild all)	prepost hstbld post	weekly	R	hstbld userid/passwd level(weekly/rebuild)
hstbld_diff	Sales	N	N/A	ad hoc	hstbld	N/A	ad hoc	N	hstbld_diff userid/passwd
hstbldmth	Sales	Y	Dept	3	posupld	prepost hstbldmth post	monthly	R	hstbldmth userid/passwd level(monthly/rebuild)
hstbldmth_diff	Sales	N	N/A	ad hoc	N/A	prepost hstbld post	ad hoc	N	hstbldmth_diff userid/passwd
hstmthupd	Sales	Y	Location	3	(The program should be run on the last day of the month).	(Run SQL*Loader using the control file hstmthupd.ctl to load data from the output file written by HSTMTHUPD.PC for non-existent records on ITEM_LOC_HIST_MTH)	monthly	R	hstmthupd userid/passwd (out_file)
hstprg	Sales	N	N/A	ad hoc	N/A	N/A	monthly	N	hstprg userid/passwd
hstprg_diff	Sales	N	N/A	ad hoc	N/A	N/A	weekly	N	hstprg_diff userid/passwd
hstwkupd	Sales	Y	Store/Wh	3	N/A	Run SQL*Loader using the control file hstwkupd.ctl to load data from the output file written by HSTWKUPD.PC for non-existent records on ITEM_LOC_HIST	weekly	R	hstwkupd userid/passwd (out_file)
htsupld	Trade Management	Y	File-based	ad hoc	Hts240_to_2400 (perl script) Ushts2rms (perl script) prepost htsupld pre	N/A	ad hoc	R	htsupld userid/passwd input_file reject_file country_id ; perl hts_240_to_2400 inputfile outputfile ; perl ushts2rms inputfile outputfile rejectfile

					ibexpl replext				
ibcalc	Investment Buy	Y	Dept	3	prepost ibcalc pre	rplbld	daily	R	ibcalc userid/passwd
ibexpl	Investment Buy	N	N/A	3	rplext	ibcalc	daily	N	ibexpl userid/passwd
invaprg	Inventory Adjustments	N	N/A	ad hoc	N/A	N/A	monthly	N	invaprg userid/passwd
invclshp	Invoice Matching	N	N/A	2	N/A	N/A	daily	N	invclshp userid/passwd
invprg	Invoice Matching	N	N/A	ad hoc	ordprg	N/A	monthly	R	invprg userid/passwd
lcadnld	Letter of Credit	N	N/A	4	N/A	lcmt700 (perl script)	daily	R	lcadnld userid/passwd output_file
lclrbld	Maintenance - Location	N	N/A	ad hoc	storeadd	N/A	monthly	R	lclrbld userid/passwd
lcmdnld	Letter of Credit	N	N/A	4	N/A	lcmt707 (perl script)	daily	R	lcmdnld userid/passwd output_file.
lcup798	Letter of Credit	N	N/A	2	lcmt798 (perl script)	N/A	daily	R	lcup798 userid/passwd input_file rej_file
lcupld	Letter of Credit	N	N/A	2	lcmt730 (perl script)	N/A	daily	R	lcupld userid/passwd input_file rej_file
lifstkup	Stock Ledger	N	File-based	1	inv_bal_upload.sh (warehouse mgmt program)	stkupld	daily	N	lifstkup userid/passwd input_file output_file
likestore	Maintenance - Location	Y	Dept	ad hoc	storeadd	prepost likestore post mrtrtv	daily	R	likestore userid/passwd
mrt	Mass Return Transfers	Y	Warehouse	2	N/A	mrtupd	daily	R	mrt userid/passwd
mrtprg	Mass Return Transfers	Y	Warehouse	ad hoc	N/A	N/A mrtupd	ad hoc	R	mrtprg userid/passwd
mrtrtv	Mass Return Transfers	Y	Warehouse	2	mrt		daily	R	mrtrtv userid/passwd
mrtupd	Mass Return Transfers	Y	Warehouse	2	mrtrtv	N/A	daily	R	mrtupd userid/passwd
nwppurge	Stock Ledger	N	N/A	ad hoc	N/A	N/A	ad hoc	N	nwppurge userid/passwd
nwpyearend	Stock Count	Y	Location	4	run on last day of year prepost ociroq pre	N/A	yearly	R	nwpyearend userid/passwd
ociroq	Replenishment	N	N/A	3	repladj	N/A	daily	R	ociroq userid/passwd
onictext	Planing System Interface	Y	Transfer	4	onordext	onorddnld	weekly	R	onictext userid/passwd datefile
onorddnld	Planing System Interface	Y	Store/Wh	4	onictext	N/A	daily	R	onorddnld userid/passwd
onordext	Planing System Interface	Y	Order	4	prepost onordext pre	onictext	daily	R	onordext userid/passwd datefile
ordautcl	Ordering	N	N/A	ad hoc	N/A ditinsrt sccext	N/A	daily	N	ordautcl userid/passwd
orddscnt	Deals	Y	Supplier	4	reclsdly	discotbapply	dealcls	daily	R	orddscnt userid/passwd
ordinvupld	Inventory Adjustments	Y	File-based	2	saordinvexp	N/A	daily	R	ordinvupld userid/passwd input_file reject_file lock_file
ordprg	Ordering	N	N/A	ad hoc	N/A	invprg	monthly	N	ordprg userid/passwd
ordrev	Ordering	N	N/A	4	orddscnt sccext (After RPM pricing change extraction	edidlord otbdnld otbdlsal	daily	R	ordrev userid/passwd
ordupd	Ordering	N	N/A	4	batch)	otbdlord	daily	N	ordupd userid/passwd
otbdlord	OTB	N	N/A	4	ordupd	N/A	daily	R	otbdlord userid/passwd output_file
otbdlsal	OTB	N	N/A	4	ordupd	N/A	daily	R	otbdlsal userid/passwd output_file
otbdnld	OTB	N	N/A	4	ordupd	N/A	daily	R	otbdnld userid/passwd output_file
otbprg	OTB	N	N/A	ad hoc	N/A	N/A	monthly	N	otbprg userid/passwd
otbupfwd	OTB	Y	File-based	ad hoc	N/A	N/A	daily	R	userid/passwd input_file reject_file
otbupld	OTB	Y	File-based	ad hoc	N/A	N/A	daily	R	otbupld userid/passwd input_file reject_file
poscdnld	Point of Sale Interface	N	N/A	4	posdnld	prepost poscdnld post	daily	R	poscdnld userid/passwd outputfile
posdnld	Point of Sale Interface	Y	Store	ad hoc	N/A	prepost posdnld post	daily	R	posdnld userid/passwd output_filename
posgpdld	Point of Sale Interface	N	N/A	4	reclsdly	N/A	daily	R	posgpdld userid/passwd output_file
posrefresh	Inventory	N	N/A	ad hoc	N/A	N/A	ad hoc	R	posrefresh userid/passwd output_file store
posupld	Sales	Y	File-based	2	saexprms(ReSA)	prepost posupld post	salstage	daily	R	posupld userid/passwd infile rejfile vatfile itemfile lockfile
prepost	Pre/post functionality	N	N/A	all phases	N/A	N/A	daily	N	prepost userid/passwd program pre_or_post
reclsdly	Item Maintenance	Y	Reclass no	4	cremhierdly	prepost reclsdly post reqext	daily	R	reclsdly userid/passwd process_mode
repladj	Replenishment	Y	Dept	3	rplatupd	rplext	daily	R	repladj userid/passwd
replsizeprofile	Replenishment	N	N/A	ad hoc	prepost replsizeprofile pre posupld rplatupd repladj prepost ociroq pre ociroq	N/A	ad hoc	N	replsizeprofile userid/passwd Y/N. (Y/N inicator indicates if allocations is installed or not, if installed pre job for this program has to be run prepost replsizeprofile pre)
reqext	Replenishment	Y	Partition (Item)	3	prepost reqext pre storeadd sccext	prepost reqext post prepost rilmaint post	rplext	daily	R	reqext userid/passwd partition_position (May use the batch_reqext.ksh for launching this program as it is created based on performance considerations)
rilmaint	Replenishment	Y	Location	3	rplatupd rplsplit supcnstr	repladj	daily	R	rilmaint username/password
rplapprv	Replenishment	N	N/A	3	prepost rplapprv pre	N/A	daily	R	rplapprv userid/passwd
rplatrhistprg	Replenishment	N	N/A	ad hoc	N/A	N/A	ad hoc	N	rplathistprg userid/passwd (This batch may be run only if repl_attr_hist_retention_weeks in system_options table is set)
rplatupd	Replenishment	Y	Location	3	prepost rplatupd pre ibcalc rplext cntrprss vrplbld ibexpl	prepost rplatupd post repladj	rplext reqext	daily	R	rplatupd userid/passwd
rplbld	Replenishment	Y	Supplier	3	supsplit prepost rpl pre rplatupd rilmaint repladj reqext	supcnstr prepost rplext post contracting is used, otherwise run …	supsplit cntrprss(if ibcalc rplbld) ibcxpl	daily	R	rplbld username/password
rplext	Replenishment	Y	Dept	3				daily	R	rplext userid/passwd dept (May use the batch_rplext.ksh for launching this program as it is created based on performance considerations)
rplprg	Replenishment	N	N/A	ad hoc	N/A	N/A		daily	N	rplprg userid/passwd
rplprg_month	Replenishment	N	N/A	ad hoc	N/A	N/A		monthly	N	rplprg_month userid/passwd
rplsplit	Replenishment	Y	Supplier	3	supcnstr	rplapprv		daily	R	rplsplit userid/passwd
rpmmovavg	Pricing	Y	Store	3	salstage	N/A		daily	R	rpmmovavg userid/passwd business_date(YYYYMMDD) store(optional)
rtvprg	RTV	N	N/A	ad hoc	N/A	N/A		monthly	N	rtvprg userid/passwd
sacrypt	Sales Audit	Y	Store/Day	SA	sagetref satotals	N/A		daily	N	sacrypt userid/passwd infile outfile key_file e/d (Encryption/Decryption indicator) Note: outfile generated by batch is infile for saimptlog.
saescheat	Sales Audit	N	N/A	SA	sarules satotals	saexpim	sapurge	monthly	R	saescheat userid/passwd
saexpach	Sales Audit	N	N/A	SA	sarules sapreexp satotals	N/A		daily	R	saexpach userid/passwd
saexpgl	Sales Audit	N	N/A	SA	sarules sapreexp sapreexp	N/A		daily	R	saexpgl userid/passwd
saexpim	Sales Audit	N	N/A	SA	saescheat	N/A		daily	R	saexpim userid/passwd
saexprdw	Sales Audit	Y	Store	SA	sapreexp satotals	resa2rdw(perl script)		daily	R	saexprdw userid/passwd ; perl resa2rdw inputfile outputfile
saexprms	Sales Audit	Y	Store	SA	sarules sapreexp satotals	saprepost saexprms post		daily	R	saexprms userid/passwd
saexpuar	Sales Audit	N	N/A	SA	sarules sapreexp	N/A		daily	R	saexpuar userid/passwd sagetref userid/passwd itemfile wastefile ref_itemfile prim_variantfile varupcfile storedayfile codesfile errorfile ccvalfile storepostfile tenderhypefile merchcodesfile partnerfile supplierfile employeefile bannerfile currencyfile
sagetref	Sales Audit	N	N/A	SA	sastdycr	saimptlog		daily	R	(To prevent a file from being written, place a '-' in its place. Note: Item files must all be written together).
saimpadj	Sales Audit	N	N/A	SA	saimptlogfin	satotals		daily	R	saimpadj userid/passwd input_file rej_file

					sagetref	saprepost saimptlog post			saimptlog user/pw infile badfile itemfile wastefile refitemfile primvariantfile varupcfile storedayfile promfile codesfile errorfile
saimptlog	Sales Audit	Y	Store/Day	SA	saprepost saimptlog pre saimptlog	(Use sql Loader to load data into ReSA tables)	daily	N	ccvalfile storeposfile tendertypefile merchcodefile partnerfile supplierfile employeefile bannerfile
saimptlogfin	Sales Audit	N	N/A	SA	savouch salstage fifgldn1	satotals	daily	R	saimptlogfin userid/passwd store_day_file
salapnd	Stock Ledger	N	N/A	3	fifgldn2	N/A	daily	R	salapnd userid/passwd
saldly	Stock Ledger	Y	Store/Wh	3	salstage	salweek	daily	R	saldly userid/passwd
saleoh	Stock Ledger	Y	Dept	3	salmth	N/A	half yearly	N	saleoh userid/passwd
salins	Sales	N	N/A	0	N/A	N/A	daily	R	salins userid/passwd
salmaint	Stock Ledger	N	N/A	ad hoc	N/A salweek	N/A	half yearly	N	salmaint userid/passwd pre_or_post
salmth	Stock Ledger	Y	Dept	3	pre_dwi_extract.ksh(RMS	prepost salmth post	monthly	R	salmth userid/passwd
salprg	Stock Ledger	N	N/A	ad hoc	N/A	N/A	daily	N	salprg userid/passwd
						saldly salapnd salweek dealfct rpmmovavg fifgldn1 fifgldn2			
salstage	Stock Ledger	N	N/A	3	posupld		daily	N	salstage userid/passwd
					saldly stkdly salapnd prepost salweek pre dealfct dealinc vendinvc vendinvf	salmth prepost salweek post			
salweek	Stock Ledger	Y	Dept	3			weekly	R	salweek userid/passwd
saordinvexp	Sales Audit	Y	Store	2	N/A	N/A	daily	R	saordinvexp userid/passwd
sapreexp	Sales Audit	N	N/A	SA	SA audit process	(Before any SA export process)	daily	R	sapreexp userid/passwd
saprepost	Sales Audit	N	N/A	SA	N/A saprepost sapurge pre	N/A	daily	N	saprepost userid/passwd program pre_or_post
sapurge	Sales Audit	Y	Store	SA	(This program should be run as the last program in the ReSA batch schedule)	saprepost sapurge post	daily	R	sapurge userid/passwd deleted_items_file [optional list of store days to be deleted]
sarules	Sales Audit	N	N/A	SA	satotals (It should run before the DTESYS batch program and before the next store/day's transactions are	sapreexp saescheat	daily	R	sarules userid/passwd store_no
sastdycr	Sales Audit	N	N/A	date_set	received)	dtesys	daily	R	sastdycr userid/passwd [YYYYMMDD]
satotals	Sales Audit	N	N/A	SA	saimptlogfin	sarules	daily	R	satotals userid/passwd store_no
savouch	Sales Audit	N	N/A	SA	saimptlog (and its SQL Load process)	saimptlogfin	daily	R	savouch userid/passwd infile rejfile tendertype_file
sccext	Costing	Y	Cost change	3	cstisldex.ksh (RMS to RDW RETL extract)	prepost sccext post	daily	R	sccext userid/passwd
schedprg	Organizational Hierarchy	N	N/A	ad hoc	N/A	N/A	monthly	R	schedprg userid/passwd
sitmain	Item Maintenance	N	N/A	ad hoc	iclrbld	N/A	ad hoc	R	sitmain userid/passwd
soutdnld	Forecasting	Y	Domain Id	4	N/A	N/A	daily	R	soutdnld userid/passwd
stkdly	Stock Ledger	Y	Dept	3	stkvar	salweek	daily	R	stkdly userid/passwd
stkprg	Stock Ledger	N	N/A	ad hoc	N/A	prepost stkprg post	monthly	N	stkprg userid/passwd
stkschedxpld	Stock Ledger	Y	Location	0	N/A prepost stkupd pre	stkxpld	daily	R	stkchedxpld userid/passwd
stkupd	Stock Ledger	Y	Location	3	stkxpld	prepost stkupd post	daily	R	stkupd userid/passwd
stkupld	Stock Ledger	Y	Dept	1	lifstkup	N/A	daily	R	stkupld userid/passwd input_file reject_file
stkvar	Stock Ledger	Y	Dept	1	N/A stkschedxpld	N/A	daily	R	stkvar userid/passwd [report_file_name]
stkxpld	Stock Ledger	Y	Dept	3	wasteadj	stkupd	daily	R	stkxpld userid/passwd
stlgdnld	Stock Ledger	Y	Dept	4	N/A	N/A prepost storeadd post	weekly	R	stlgdnld userid/passwd input_file
storeadd	Maintenance - Location	N	N/A	ad hoc	N/A	likestore	daily	R	storeadd userid/passwd
supcnstr	Replenishment	N	N/A	3	rplbld	rplsplit	daily	R	supcnstr userid/passwd
supmth	Stock Ledger	Y	Dept	3	N/A rplext	prepost supmth post	monthly	R	supmth userid/passwd
supsplit	Replenishment	Y	Item	3 / Adhoc	prepost supsplit pre	rplbld	daily	R	supsplit userid/passwd
tamperctn	Receiving	N	N/A	ad hoc	N/A	N/A	ad hoc	N	tamperctn userid/passwd
tcktdnld	Maintenance	N	N/A	ad hoc	N/A	N/A	daily	R	tcktdnld userid/passwd filename print_online_ind days_in_advance [location]
tlfposdn	Sales Tax	N	N/A	4	txrposdn	prepost tlfposdn post	daily	R	tlfposdn userid/passwd output_file
tranupld	Trade Management	Y	File-based	ad hoc	N/A	N/A	daily	R	tranupld userid/passwd infile
tsfclose	Transfers	Y	Transfer	ad hoc	N/A	N/A	daily	R	tsfclose userid/passwd
tsfprg	Transfers	N	N/A	ad hoc	N/A	N/A	monthly	R	tsfprg userid/passwd
txrposdn	Point of Sale Intereface	N	N/A	4	N/A	tlfposdn	daily	R	txrposdn userid/passwd
txrtupld	Sales Tax	N	N/A	4	N/A	N/A	ad hoc	R	txrtupld username/password input_file reject_file
vatdlxpl	Maintenance - VAT	Y	Vat Region	0	N/A	prepost vatdlxpl post	daily	R	vatdlxpl userid/passwd
vendinvc	Deals	Y	Deal Id	3	dealact salstage(if daily) prepost vendinvc pre	prepost vendinvc post salweek(if weekly) salmth (if monthly)	daily	R	vendinvc userid/passwd
vendinvf	Deals	Y	Deal Id	3	salstage(if daily) prepost vendinvf pre	prepost vendinvf post salweek(if weekly) salmth (if monthly)	daily	R	vendinvf userid/passwd
vrplbld	Replenishment	Y	Supplier	2	ediupack	prepost vrplbld post	daily	R	vrplbld userid/passwd
wasteadj	Stock Ledger	Y	Store	3	N/A	stkxpld stkupd	daily	R	wasteadj userid/passwd
wfordcls	Ordering	Y	Wholesale Order ID	ad hoc	N/A	wfordprg	daily	R	wfordcls userid/passwd
wfordprg	Ordering	Y	Wholesale Order ID	ad hoc	wfordcls	N/A	daily	R	wfordprg userid/passwd
wfordupld.ksh	Ordering	Y	CustomerRefID	adhoc	N/A	N/A	ad hoc	R	wfordupld.ksh userid/passwd input_file_directory output_file_directory number_of_threads
wfrtnprg	Ordering	Y	Wholesale Return ID	ad hoc	N/A	N/A	daily	R	wfrtnprg userid/passwd
whadd	Maintenance - Location	N	N/A	ad hoc	N/A	prepost whadd post	daily	R	whadd userid/passwd
whstrasg	Maintenance - Location	N	N/A	3	(Must be run after all replenishment batch programs).	prepost whstrasg post	daily	R	whstrasg userid/passwd

RPM Dependency and Scheduling Details

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
ItemReclassBatch	Future Retail	N	N/A	N/A	reclsdly(RMS)	NewItemLocBatch	daily/ad hoc	N	itemReclassBatch.sh rpm-app-userid password
NewItemLocBatch	Future Retail	N	N/A	N/A	storeadd(RMS), ItemReclassBatch	LocationMoveBatch	daily/ad hoc	N	newItemLocBatch.sh rpm-app-userid password [status [error-commit-count]]
LocationMoveScheduleBatch	Zone Structure/Future Retail	Y	Location move	N/A	NewItemLocBatch	LocationMoveBatch, PriceEventExecutionBatch PriceEventExecutionBatch	daily, adhoc	N	locationMoveScheduleBatch.sh rpm-app-userid password
LocationMoveBatch	Zone Structure/Future Retail	Y	Location move	N/A	NewItemLocBatch LocationMoveBatch		daily	N	locationMoveBatch.sh rpm-app-userid password
PriceEventExecutionBatch	Price Change/Clearance/Promotion	Y	Pricing event	N/A	salstage (RMS) PriceEventExecutionBatch	PriceEventExecutionRMSBatch	daily	N	priceEventExecutionBatch.sh rpm-app-userid password
PriceEventExecutionRMSBatch	Price Change/Clearance/Promotion	Y	Pricing event	N/A		PriceEventExecutionDealsBatch	daily	N	priceEventExecutionRMSBatch.sh rpm-app-userid password
PriceEventExecutionDealsBatch	Price Change/Clearance/Promotion	Y	Pricing event	N/A	PriceEventExecutionRMSBatch	MerchExtractKickOffBatch	daily	N	priceEventExecutionDealsBatch.sh rpm-app-userid password
PriceStrategyCalendarBatch	Price Strategy	N		N/A	N/A	MerchExtractKickOffBatch	daily	N	priceStrategyCalendarBatch.sh rpm-app-userid password
WorksheetAutoApproveBatch	Pricing Worksheet	Y	Price strategy	N/A	N/A PriceEventExecutionBatch storeadd (RMS) WorksheetAutoApproveBatch PriceStrategyCalendarBatch	MerchExtractKickOffBatch	daily	N	worksheetAutoApproveBatch.sh rpm-app-userid password
MerchExtractKickOffBatch	Pricing Worksheet	Y	Price strategy	N/A	wfcostcalc (RMS)	Wholesale Item Catalog Report (RMS)	daily	N	merchExtractKickOffBatch.sh rpm-app-userid password
PurgeBulkConflictCheckArtifacts	Conflict Checking	N	N/A	N/A	MerchExtractKickOffBatch	N/A	daily	N	purgeBulkConflictCheckArtifacts.sh rpm-app-userid password

					MerchExtractKickOffBatch				
RPMtoORPOSPublishBatch.sh	Price Change/Clearance/Promotion	N	N/A	N/A	WorksheetAutoApproveBatch	N/A	daily	N	ksh RPMtoORPOSPublishBatch.sh <userid/passwd@sid > <log path> <error path>
RPMtoORPOSPublishExport.sh	Price Change/Clearance/Promotion	Y	Location	N/A	RPMtoORPOSPublishBatch.sh	N/A	daily	N	ksh RPMtoORPOSPublishExport.sh <userid/passwd@sid > <Numberof slots> <logpath> <error path> <Export path>
RegularPriceChangePublishBatch	Regular Price Changes	Y	Price event (item/loc)	N/A	WorksheetAutoApproveBatch	RegularPriceChangePublishExport	daily/ad hoc	N	regularPriceChangePublishBatch.sh rpm-app-userid password
regularPriceChangePublishExport	Regular Price Changes	N	Price event (item/loc)	N/A	RegularPriceChangePublishBatch		daily/ad hoc	N	regularPriceChangePublishExport.sh rpm-db-userid/pwd@database [export-path]
ClearancePriceChangePublishBatch	Clearances	Y	Price event (item/loc)	N/A	WorksheetAutoApproveBatch	ClearancePriceChangePublishExport	daily/ad hoc	N	clearancePriceChangePublishBatch.sh rpm-app-userid password
ClearancePriceChangePublishExport	Clearances	N	Price event (item/loc)	N/A	ClearancePriceChangePublishBatch		daily/ad hoc	N	clearancePriceChangePublishExport.sh rpm-db-userid/pwd@database [export-path]
PromotionPriceChangePublishBatch	Promotions	Y	Price event (item/loc)	N/A	WorksheetAutoApproveBatch	PromotionPriceChangePublishExport	daily/ad hoc	N	promotionPriceChangePublishBatch.sh rpm-app-userid password
PromotionPriceChangePublishExport	Promotions	N	Price event (item/loc)	N/A	PromotionPriceChangePublishBatch	N/A	daily/ad hoc	N	promotionPriceChangePublishExport.sh rpm-db-userid/pwd@database [export-path]
PriceChangeAutoApproveResultsPurgeBatch	Purge	N	N/A	N/A	N/A	N/A	daily	N	priceChangeAutoApproveResultsPurgeBatch.sh rpm-app-userid password
PriceChangePurgeBatch	Purge	N	N/A	N/A	N/A	N/A	daily	N	priceChangePurgeBatch.sh rpm-app-userid password
PriceChangePurgeWorkspaceBatch	Purge	N	N/A	N/A	N/A	N/A	daily	N	priceChangePurgeWorkspaceBatch.sh rpm-app-userid password
promotionArchiveBatch.sh	Promotin	N	N/A	N/A	N/A	N/A	daily		
PromotionPurgeBatch	Purge	N	N/A	N/A	N/A	N/A	daily	N	promotionPurgeBatch.sh rpm-app-userid password
PurgeExpiredExecutedOrApprovedClearancesBatch	Purge	N	N/A	N/A	N/A	N/A	daily	N	purgeExpiredExecutedOrApprovedClearancesBatch.sh rpm-app-userid password
PurgeUnusedAndAbandonedClearancesBatch	Purge	N	N/A	N/A	N/A	N/A	daily	N	purgeUnusedAndAbandonedClearancesBatch.sh rpm-app-userid password
PurgeLocationMovesBatch	Purge	N	N/A	N/A	N/A	N/A	daily	N	purgeLocationMovesBatch.sh rpm-app-userid password
ZoneFutureRetailPurgeBatch	Purge	N	N/A	N/A	N/A	N/A	daily	N	zoneFutureRetailPurgeBatch.sh rpm-app-userid password
ItemLocDeleteBatch	Purge	N	N/A	N/A	N/A	N/A	daily	N	itemLocDeleteBatch.sh rpm-app-userid password
priceChangeAreaDifferentialBatch	Price Change	Y	N/A	N/A	N/A	N/A	ad hoc	N	priceChangeAreaDifferentialBatch rpm-app-userid password
InjectorPriceEventBatch	Price Change/Clearance/Promotion	Y	Item/Location	N/A	N/A	PriceEventExecutionDealsBatch	ad hoc	N	injectorPriceEventBatch.sh rpm-app-userid password [status=<status>] [event_type=<event_type>]
refreshPosDataBatch	Price Event	Y	N/A	N/A	N/A	N/A	ad hoc	N	refreshPosDataBatch.sh <username> <password> <location> [date(YYYYMMdd)]
					RegularPriceChangePublishExport, ClearancePriceChangePublishExport,				
purgePayloadsBatch	purge	N	Price event		PromotionPriceChangePublishExport		ad hoc	N	purgePayloads.sh <userid/pwd@database> <publish-status>
taskPurgeBatch.sh	Purge	N	N/A	N/A	N/A	N/A	daily post batch	N	taskPurgeBatch.sh <username> <password> [<purgeDays>] [Y/N]
processPendingChunksBatch	Price Change/Clearance/Promotion	Y	N/A	N/A	N/A	N/A	ad hoc	N	[illegible]

RelM Dependency and Scheduling Details

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
reimaccountworkspacepurge	Invoice Matching (RelM)	N	N/A	N/A	N/A	N/A reimrollup	ad hoc	R	Userid/passwd
reimautomatch	Invoice Matching (RelM)	Y	N/A	6	NA	reimposting	daily	R	Userid/passwd
reimpurge	Invoice Matching (RelM)	N	N/A	0	N/A	N/A	daily	R	Userid/passwd
reimcomplexdealupload	Invoice Matching (RelM)	Y	N/A	5	vendinvc(RMS), vendinvf(RMS)	reimautomatch reimrollup	daily	R	Userid/passwd BlockSize [PartitionNo]
reimcreditnoteautomatch	Invoice Matching (RelM)	N	N/A	6	N/A	reimposting	daily	R	Userid/passwd
reimdiscrepancypurge	Invoice Matching (RelM)	N	N/A	1	N/A	N/A	daily	R	Userid/passwd
reimediinvupload	Invoice Matching (RelM)	Y	N/A	5	edidiinv(RMS)	reimautomatch,reimcreditnoteautomatch	daily	R	Userid/passwd "EDI input file with path" "EDI reject file with path"
reimediinvdownload	Invoice Matching (RelM)	N	N/A	7	reimposting	N/A	daily	R	Userid/passwd
reimfixeddealupload	Invoice Matching (RelM)	Y	N/A	5	vendinvc(RMS), vendinvf(RMS)	reimautomatch	daily	R	Userid/passwd BlockSize [PartitionNo]
reimrollup	Invoice Matching (RelM)	N	N/A	6	reimautomatch,reimcreditnoteautomatch	reimposting	daily	R	Userid/passwd
reimreceiptwriteoff	Invoice Matching (RelM)	N	N/A	6	reimautomatch	N/A	daily	R	Userid/passwd
reimposting	Invoice Matching (RelM)	N	N/A	6	reimrollup	N/A	daily	R	Userid/passwd

RMS to RPAS RETL Extracts Dependency and Scheduling Details (EXTRACTS_FOR_RPAS)

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
pre_rmse_rpas.ksh	Planning/Forecast System Interface	N	N/A	N/A	N/A. This is a pre setup script	N/A	daily	N	N/A
					pre_rmse_rpas.ksh. (This is the launch script to				
rmse_rpas.ksh	Planning/Forecast System Interface	N	N/A	N/A	run the extracts)	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_attributes.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
					saldly				
rmse_rpas_daily_sales.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_domain.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
					siltmain				
					reclsdly				
rmse_rpas_item_master.ksh	Planning/Forecast System Interface	N	N/A	N/A	dlyprg	Refer to RPAS Operations guide	daily	N	N/A
					reclsdly				
					dlyprg				
rmse_rpas_merchhier.ksh	Planning/Forecast System Interface	N	N/A	N/A		Refer to RPAS Operations guide	daily	N	N/A
					dlyprg				
rmse_rpas_orghier.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
					stkdly				
rmse_rpas_stock_on_hand.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
					storeadd				
					dlyprg				
rmse_rpas_store.ksh	Planning/Forecast System Interface	N	N/A	N/A		Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_suppliers.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
					hstwkupd				
rmse_rpas_weekly_sales.ksh	Planning/Forecast System Interface	N	N/A	N/A	salweek	Refer to RPAS Operations guide	daily	N	N/A
					whadd				
					dlyprg				
rmse_rpas_wh.ksh	Planning/Forecast System Interface	N	N/A	N/A		Refer to RPAS Operations guide	daily	N	N/A
rmsl_rpas_forecast.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	rmsl_rpas_forecast.ksh daily or weekly
					After all RMS/Planning System Integration RETL				
rmsl_rpas_update_retl_date.ksh	Planning/Forecast System Interface	N	N/A	N/A	scripts are run	Refer to RPAS Operations guide	daily	N	rmsl_rpas_update_retal_date.ksh CLOSED_ORDER or RECEIVED_QTY

RMS to RDW RETL Extracts Dependency and Scheduling Details (EXTRACTS_FOR_RDW)

Dimension source:

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
cdedtlex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
cmptrex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
cmptrlmex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
cmptrlocex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
crncycdex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
emplyex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
					A, B, storeadd (RMS), dlyprg (RMS),				
orgaraex.ksh	RDW interface	N	N/A	N/A	lclrbld (RMS)	Refer to RDW operations guide	daily	N	N/A
					A, B, storeadd (RMS), dlyprg (RMS),				
orgchanex.ksh	RDW interface	N	N/A	N/A	lclrbld (RMS)	Refer to RDW operations guide	daily	N	N/A
					A, B, storeadd (RMS), dlyprg (RMS),				
orgchnex.ksh	RDW interface	N	N/A	N/A	lclrbld (RMS)	Refer to RDW operations guide	daily	N	N/A
					A, B, storeadd (RMS), dlyprg (RMS),				
orgdisex.ksh	RDW interface	N	N/A	N/A	lclrbld (RMS)	Refer to RDW operations guide	daily	N	N/A
					A, B, storeadd (RMS), dlyprg (RMS),				
orgllmex.ksh	RDW interface	N	N/A	N/A	lclrbld (RMS)	Refer to RDW operations guide	daily	N	N/A
					A, B, storeadd (RMS), dlyprg (RMS),				
orglocex.ksh	RDW interface	N	N/A	N/A	lclrbld (RMS)	Refer to RDW operations guide	daily	N	N/A

orglolex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lclrbld (RMS)	Refer to RDW operations guide	daily	N	N/A
orgltmex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lclrbld (RMS)	Refer to RDW operations guide	daily	N	N/A
orgltrex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lclrbld (RMS)	Refer to RDW operations guide	daily	N	N/A
orgrgnex.ksh	RDW interface	N	N/A	N/A	A, B, storeadd (RMS), dlyprg (RMS), lclrbld (RMS)	Refer to RDW operations guide	daily	N	N/A
phasex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
prdclsex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdly (RMS), reclsdly (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prdcmpex.ksh	RDW interface	N	N/A	N/A	A,B	Refer to RDW operations guide	daily	N	N/A
prddepex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdly (RMS), reclsdly (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prddiffex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdly (RMS), reclsdly (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prddivex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdly (RMS), reclsdly (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prddtypex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdly (RMS), reclsdly (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prdgrpex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdly (RMS), reclsdly (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prdisex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
prdislex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
prditmex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdly (RMS), reclsdly (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prditmlex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdly (RMS), reclsdly (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prditmlmex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdly (RMS), reclsdly (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prditmltmex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
prditmsmex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
prdpimex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdly (RMS), reclsdly (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prdsbcex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdly (RMS), reclsdly (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
prdudaex.ksh	RDW interface	N	N/A	N/A	A, B, cremhierdly (RMS), reclsdly (RMS), dlyprg (RMS)	Refer to RDW operations guide	daily	N	N/A
regngrpex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
regnmtxex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
rsnex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
seasnex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
subtrantypex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
supctrex.ksh	RDW interface	N	N/A	N/A	A, B, cntrmain (RMS)	Refer to RDW operations guide	daily	N	N/A
supsupex.ksh	RDW interface	N	N/A	N/A	A, B, cntrmain (RMS)	Refer to RDW operations guide	daily	N	N/A
suptrmex.ksh	RDW interface	N	N/A	N/A	A, B, cntrmain (RMS)	Refer to RDW operations guide	daily	N	N/A
suptrtex.ksh	RDW interface	N	N/A	N/A	A, B, cntrmain (RMS)	Refer to RDW operations guide	daily	N	N/A
tndrtypex.ksh	RDW interface	N	N/A	N/A	A,B	Refer to RDW operations guide	daily	N	N/A
ttltypex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
wfcustex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A
wfcustgrpex.ksh	RDW interface	N	N/A	N/A	A, B	Refer to RDW operations guide	daily	N	N/A

Fact source:

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
cmptprcildex.ksh	RDW interface	N	N/A	N/A	B	Refer to RDW operations guide	daily	N	cmptprcildex.ksh output_file_path/output_file_name
cstisldex.ksh	RDW interface	N	N/A	N/A	C	Refer to RDW operations guide	daily	N	cstisldex.ksh output_file_path/output_file_name
exchngratex.ksh	RDW interface	N	N/A	N/A	B	Refer to RDW operations guide	daily	N	exchngratex.ksh output_file_path/output_file_name
invildex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS), mrt (RMS), ordrev (RMS)	Refer to RDW operations guide	daily	Y	invildex.ksh output_file_path/output_file_name
ivaildex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS), mrt (RMS)	Refer to RDW operations guide	daily	N	ivaildex.ksh output_file_path/output_file_name
ivrcpildex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS), mrt (RMS)	Refer to RDW operations guide	daily	N	ivrcpildex.ksh output_file_path/output_file_name
ivrildex.ksh	RDW interface	N	N/A	N/A	C	Refer to RDW operations guide	daily	N	ivrildex.ksh output_file_path/output_file_name
ivtildex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS), mrt (RMS)	Refer to RDW operations guide	daily	N	ivtildex.ksh output_file_path/output_file_name
ivuildex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS), mrt (RMS)	Refer to RDW operations guide	daily	N	ivuildex.ksh output_file_path/output_file_name
lptotcldex.ksh	RDW interface	N	N/A	N/A	C, saexprdw (ReSA), resa2rdw	Refer to RDW operations guide	daily	N	lptotcldex.ksh output_file_path/output_file_name
lptotldex.ksh	RDW interface	N	N/A	N/A	C, saexprdw (ReSA), resa2rdw	Refer to RDW operations guide	daily	N	lptotldex.ksh output_file_path/output_file_name
ncstuildex.ksh	RDW interface	N	N/A	N/A	C	Refer to RDW operations guide	daily	N	ncstuildex.ksh output_file_path/output_file_name
post_dwi_temp.ksh	RDW interface	N	N/A	N/A	All extract batches	Refer to RDW operations guide	daily	N	N/A
prcildex.ksh	RDW interface	N	N/A	N/A	N/A	Refer to RDW operations guide	daily	N	prcildex.ksh output_file_path/output_file_name
pre_dwi_extract.ksh	RDW interface	N	N/A	N/A	A	salmth(RMS). Also refer to RDW operations guide	daily	N	N/A
pre_dwi_temp.ksh	RDW interface	N	N/A	N/A	B	Refer to RDW operations guide	daily	N	N/A
rplcildex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	N	rplcildex.ksh output_file_path/output_file_name
savidex.ksh	RDW interface	N	N/A	N/A	C, cntrprss (RMS), ediupavl (RMS), rplapprv (RMS)	Refer to RDW operations guide	daily	N	savidex.ksh output_file_path/output_file_name
scmialdex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	N	scmialdex.ksh output_file_path/output_file_name
scmioldex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	N	scmioldex.ksh output_file_path/output_file_name
scrqtldex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	N	scrqtldex.ksh output_file_path/output_file_name
scrtlldex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	Y	scrtlldex.ksh output_file_path/output_file_name
sctidex.ksh	RDW interface	N	N/A	N/A	C, rplapprv (RMS), cntrprss (RMS), rplbld (RMS), cntrmain (RMS),	Refer to RDW operations guide	daily	N	sctidex.ksh output_file_path/output_file_name
sfcilwex.ksh	RDW interface	N	N/A	N/A	B, rmsl_rpas_forecast.ksh (RMS to RPAS extract)	Refer to RDW operations guide	daily	N	sfcilwex.ksh output_file_path/output_file_name
slsildmex.ksh	RDW interface	N	N/A	N/A	C, saexprdw (ReSA), resa2rdw	Refer to RDW operations guide	daily	Y	slsildmex.ksh output_file_path/output_file_name
slsmkdnildex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	N	slsmkdnildex.ksh output_file_path/output_file_name
stlblmthex.ksh	RDW interface	N	N/A	N/A	C, salmth (RMS)	Refer to RDW operations guide	daily	N	stlblmthex.ksh output_file_path/output_file_name
stlblwex.ksh	RDW interface	N	N/A	N/A	C, salweek (RMS)	Refer to RDW operations guide	daily	N	stlblwex.ksh output_file_path/output_file_name
ttldmex.ksh	RDW interface	N	N/A	N/A	C, saexprdw (ReSA), resa2rdw	Refer to RDW operations guide	daily	N	ttldmex.ksh output_file_path/output_file_name
vchreschdex.ksh	RDW interface	N	N/A	N/A	B, savouch (ReSA)	Refer to RDW operations guide	daily	N	vchreschdex.ksh output_file_path/output_file_name
vchrmoveldsgex.ksh	RDW interface	N	N/A	N/A	B, savouch (ReSA)	Refer to RDW operations guide	daily	N	vchrmoveldsgex.ksh output_file_path/output_file_name
vchroutlwex.ksh	RDW interface	N	N/A	N/A	B, savouch (ReSA)	Refer to RDW operations guide	daily	N	vchroutlwex.ksh output_file_path/output_file_name
wfslsildex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	n	wfslsildex.ksh output_file_path/output_file_name
wfslsmkdnildex.ksh	RDW interface	N	N/A	N/A	C, salstage (RMS)	Refer to RDW operations guide	daily	n	wfslsmkdnildex.ksh output_file_path/output_file_name

Notes:
A is a set of batch processes on the RDW system.
A consists of the following RDW batch modules:
factopendm.ksh
medfactopendm.ksh
factclosedm.ksh
mt_prime.ksh
B is pre_dwi_extract.ksh DWI batch process.
C is pre_dwi_temp.ksh DWI batch process.

RMS to AIP RETL Extracts Dependency and Scheduling Details (EXTRACTS_FOR_AIP)

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
pre_rmse_aip.ksh	AIP interface	N	N/A	AIP RETL Extracts		Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_alloc_in_well.ksh	AIP interface	N	N/A	AIP RETL Extracts	pre_rmse_aip.ksh	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_banded_item.ksh	AIP interface	N	N/A	AIP RETL Extracts	pre_rmse_aip.ksh, dlyprg	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_cl_po.ksh	AIP interface	N	N/A	AIP RETL Extracts	pre_rmse_aip.ksh	tsfprg and ordprg, Refer to AIP Operations and Installation Guides	daily	N	N/A

rmse_aip_future_delivery_alloc.ksh	AIP interface	N	N/A	AIP RETL Extracts	pre_rmse_aip.ksh	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_future_delivery_order.ksh	AIP interface	N	N/A	AIP RETL Extracts	pre_rmse_aip.ksh, vrplbld, cntrordb	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_future_delivery_tsf.ksh	AIP interface	N	N/A	AIP RETL Extracts	pre_rmse_aip.ksh, reqext	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_item_loc_traits.ksh	AIP interface	N	N/A	AIP RETL Extracts	pre_rmse_aip.ksh, dlyprg	Refer to AIP Operations and Installation Guides dlyprg *(dlyprg to be executed the day after)	daily	N	N/A
rmse_aip_item_master.ksh	AIP interface	N	N/A	AIP RETL Extracts	pre_rmse_aip.ksh, reclsdly	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_item_retail.ksh	AIP interface	N	N/A	AIP RETL Extracts	pre_rmse_aip.ksh, dlyprg	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_item_sale.ksh	AIP interface	N	N/A	AIP RETL Extracts	pre_rmse_aip.ksh, sitmain	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_item_supp_country.ksh	AIP interface	N	N/A	AIP RETL Extracts	pre_rmse_aip.ksh, dlyprg	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_merchier.ksh	AIP interface	N	N/A	AIP RETL Extracts	pre_rmse_aip.ksh, dlyprg	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_orghier.ksh	AIP interface	N	N/A	AIP RETL Extracts	pre_rmse_aip.ksh, dlyprg	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_rec_qty.ksh	AIP interface	N	N/A	AIP RETL Extracts	pre_rmse_aip.ksh, vrplbld, cntrordb, reqext	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_store.ksh	AIP interface	N	N/A	AIP RETL Extracts	pre_rmse_aip.ksh, storeadd, likestore, dlyprg	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_substitute_items.ksh	AIP interface	N	N/A	AIP RETL Extracts	pre_rmse_aip.ksh	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_suppliers.ksh	AIP interface	N	N/A	AIP RETL Extracts	pre_rmse_aip.ksh	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_tsf_in_well.ksh	AIP interface	N	N/A	AIP RETL Extracts	pre_rmse_aip.ksh, reqext	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_aip_wh.ksh	AIP interface	N	N/A	AIP RETL Extracts	pre_rmse_aip.ksh, whadd and dlyprg	Refer to AIP Operations and Installation Guides	daily	N	N/A
rmse_store_cur_inventory.ksh	AIP interface	Y	Item_loc_soh (number of	AIP RETL Extracts	pre_rmse_aip.ksh, stkvar, wasteadj, salstage, reqext, posupld (if running delta extract), stkvar, wasteadj,	Refer to AIP Operations and Installation Guides	daily	N	D - single -threaded delta extract F - multi-threaded full extract if ITEM_LOC is partitioned; single-threaded full extract if ITEM_LOC is not partitioned
rmse_wh_cur_inventory.ksh	AIP interface	Y	Warehouse	AIP RETL Extracts	salstage, reqext	Refer to AIP Operations and Installation Guides	daily	N	D - single -threaded delta extract F - multi-threaded full extract if ITEM_LOC is partitioned; single-threaded full extract if ITEM_LOC is not partitioned

Allocation Program Dependency and Scheduling Details

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
AllocSchedulerBatch.ksh	Scheduled Allocation	Y	N/A	N/A	None	None	daily	N	N/A

RMS to MFP RETL Extracts Dependency and Scheduling Details

Program Name	Functional Area	Threaded	Driver	Phase	Pre-dependency	Post-dependency	Timing	Uses Restart/Recovery	Run Parameters for Programs
pre_rmse_rpas.ksh	Planning/Forecast System Interface	N	N/A	N/A	N/A. This is a pre setup script	N/A	daily	N	N/A
ftmednld	Planing System Interface	N	N/A	ad hoc	N/A	N/A	ad hoc	R	ftmednld userid/passwd
rmse_rpas_merchhier.ksh	Planning/Forecast System Interface	N	N/A	N/A	reclsdly dlyprg pre_rmse_rpas.ksh sitmain reclsdly dlyprg	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_item_master.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh dlyprg	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_orghier.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh storeadd dlyprg	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_store.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh whadd dlyprg	Refer to RPAS Operations guide	daily	N	N/A
rmse_rpas_wh.ksh	Planning/Forecast System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to RPAS Operations guide	daily	N	N/A
rmse_mfp_onorder.ksh	MFP System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to MFP Operations guide	Weekly	N	N/A rmse_mfp_inventory.ksh I or W Note: I - 'I'nitial load
rmse_mfp_inventory.ksh	MFP System Interface	N	N/A	N/A	pre_rmse_rpas.ksh	Refer to MFP Operations guide	Weekly	N	W-'W'eekly load

Integrated Merchandising Batch Schedule

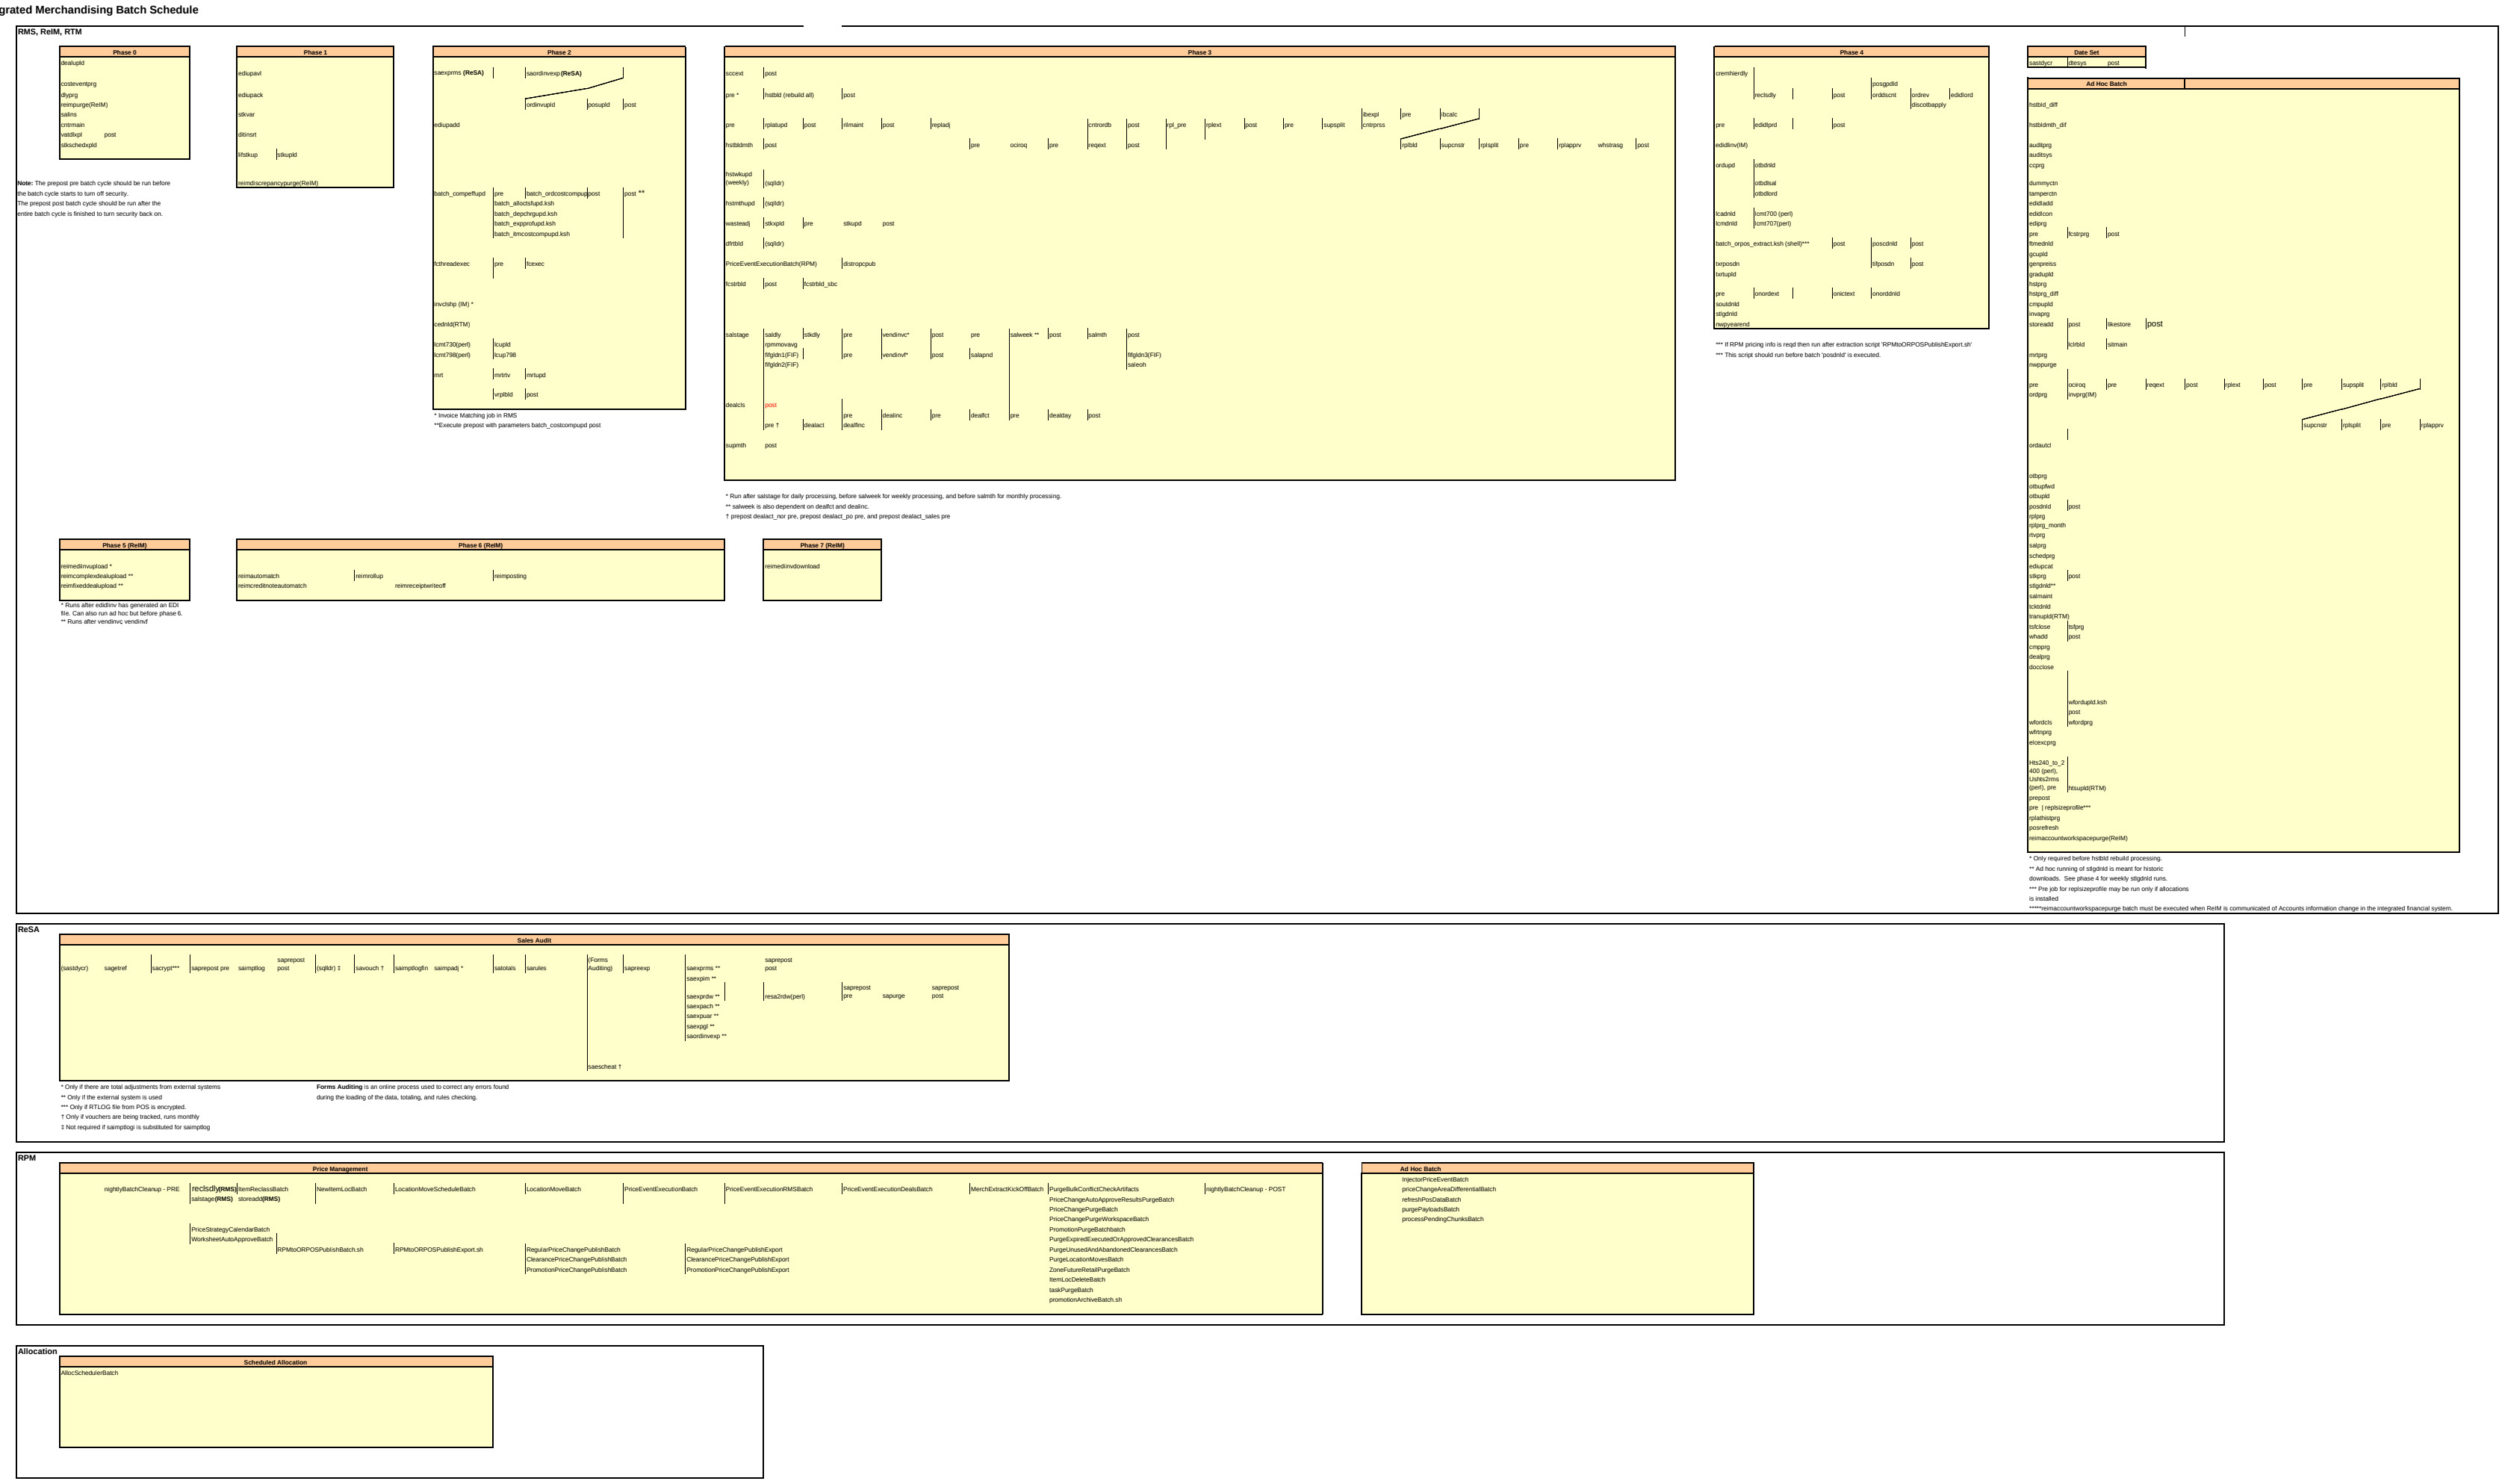

4

Interface Diagrams for RMS and RPAS

Because RMS is the retailer's central merchandising transactional processing system, it is the principle source of the foundation data needed in some of the Oracle Retail suite of products. RMS provides foundation data to RPAS, and RPAS provides planning data to RMS.

This chapter presents flow diagrams for data processing from sources. The source system's program or output file is illustrated, along with the program or process that interfaces with the source. After initial interface processing of the source, the diagrams illustrate the flow of the data.

Before setting up a program schedule, familiarize yourself with the functional and technical constraints associated with each program. Refer to the *Oracle Retail Merchandising System Operations Guide* for more information about these interface programs.

RMS Pre/Post Extract Diagrams

RMS Pre RETL Extract Maintenance

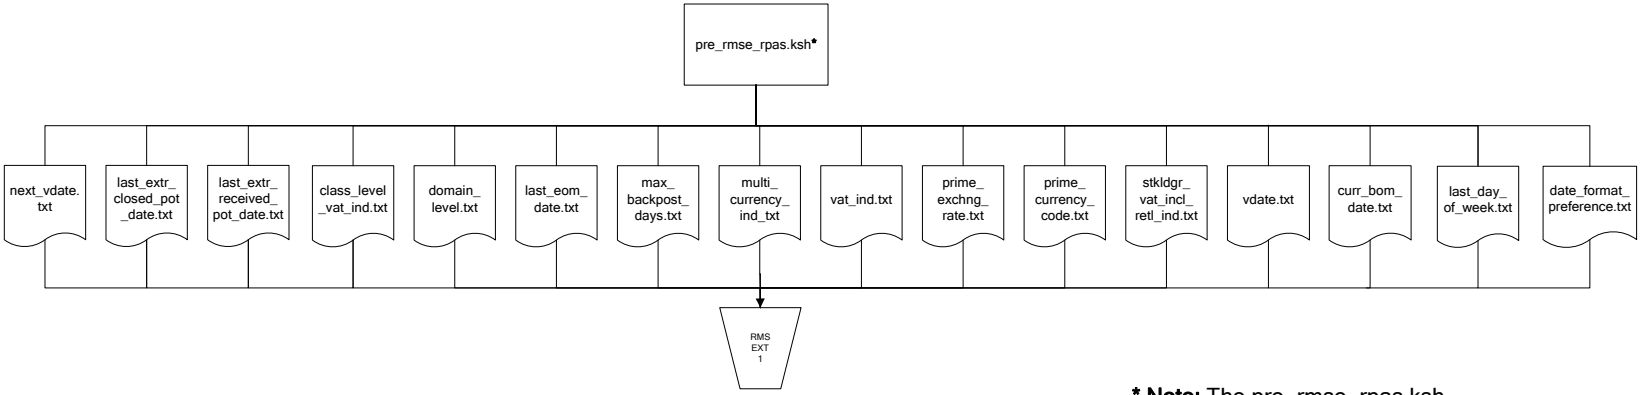

*** Note:** The pre_rmse_rpas.ksh program checks for existing .txt output files. Because of this validation, retailers running the program for the first time should include an optional -c parameter. This parameter allows the program to run successfully without pre-existing .txt output files.

RMS Foundation Data Extract Diagrams

Merchandise Hierarchy for RPAS

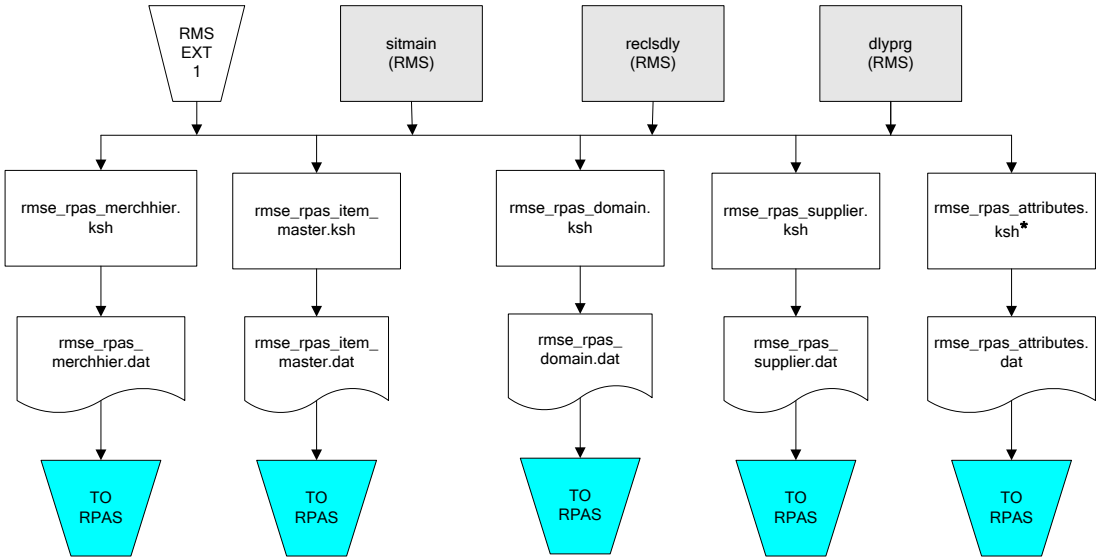

*Note: The rmse_rpas_attributes.ksh flow is applicable only if issues are active.

Organization Hierarchy for RPAS

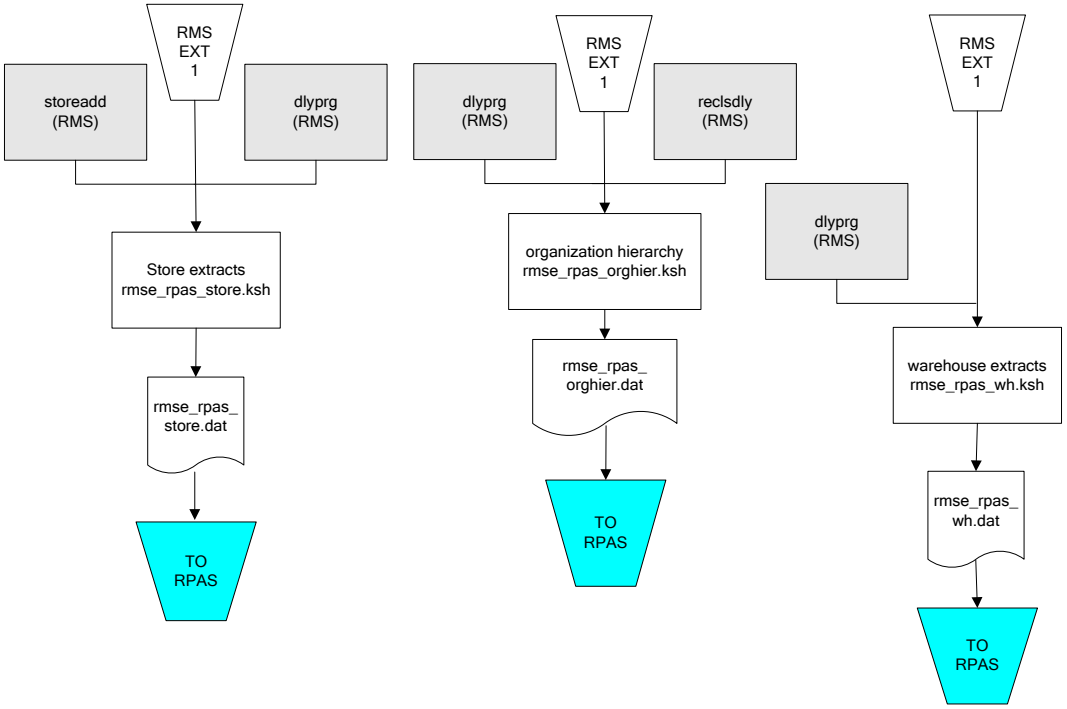

Time Extract

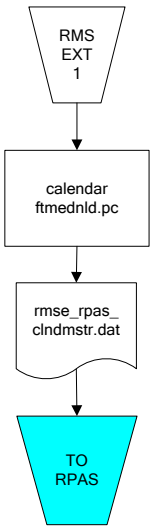

RMS Fact Data Extract Diagrams

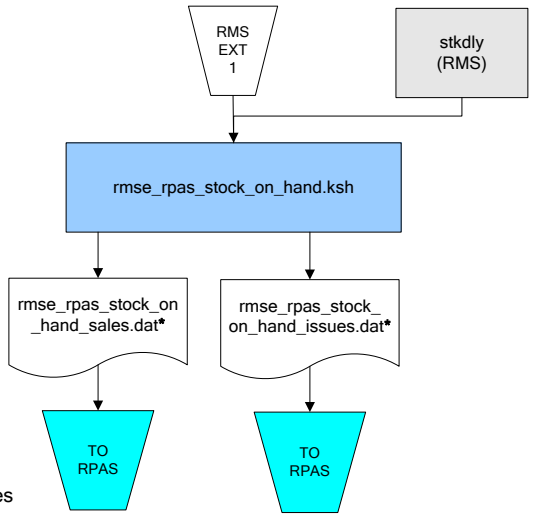

*** Note:**
If issues are active, the following two files result from the rmse_rpas_stock_on_hand.ksh flow:
rmse_rpas_stock_on_hand_issues.dat
rmse_rpas_stock_on_hand_sales.dat

If issues are **not** active, the following file results from the rmse_rpas_stock_on_hand.ksh flow:
rmse_rpas_stock_on_hand_sales.dat

Sales Extracts For RPAS

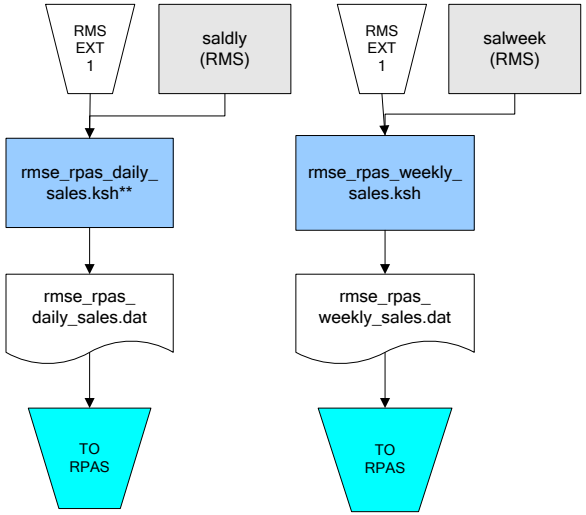

**** Note:**
Depending upon the configuration of rmse_rpas_daily_sales.ksh, the data can be pulled from TRAN_DATA_HISTORY or TRAN_DATA.

RPAS-RMS Fact Load Diagram

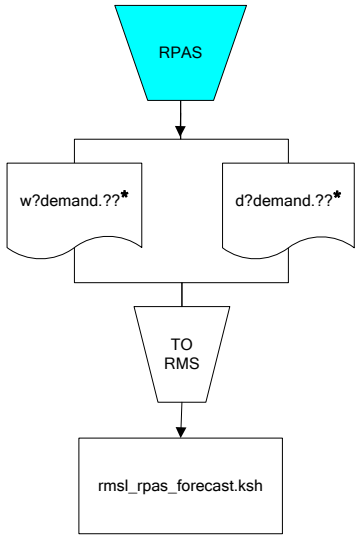

***Note:**
? can represent the following:
- i (for issues)
- s (for stores)

?? represents domain 01-99.

5

Interface Diagrams for RMS and MFP

Because RMS is the retailer's central merchandising transactional processing system, it is the principle source of the foundation data needed in some of the Oracle Retail suite of products. RMS provides foundation data to RPAS, and RPAS provides planning data to RMS.

This chapter presents flow diagrams for data processing from sources. The source system's program or output file is illustrated, along with the program or process that interfaces with the source. After initial interface processing of the source, the diagrams illustrate the flow of the data.

Before setting up a program schedule, familiarize yourself with the functional and technical constraints associated with each program. Refer to the *Oracle Retail Merchandising System Operations Guide* for more information about these interface programs.

RMS Pre/Post Extract Diagrams

RMS Pre RETL Extract Maintenance

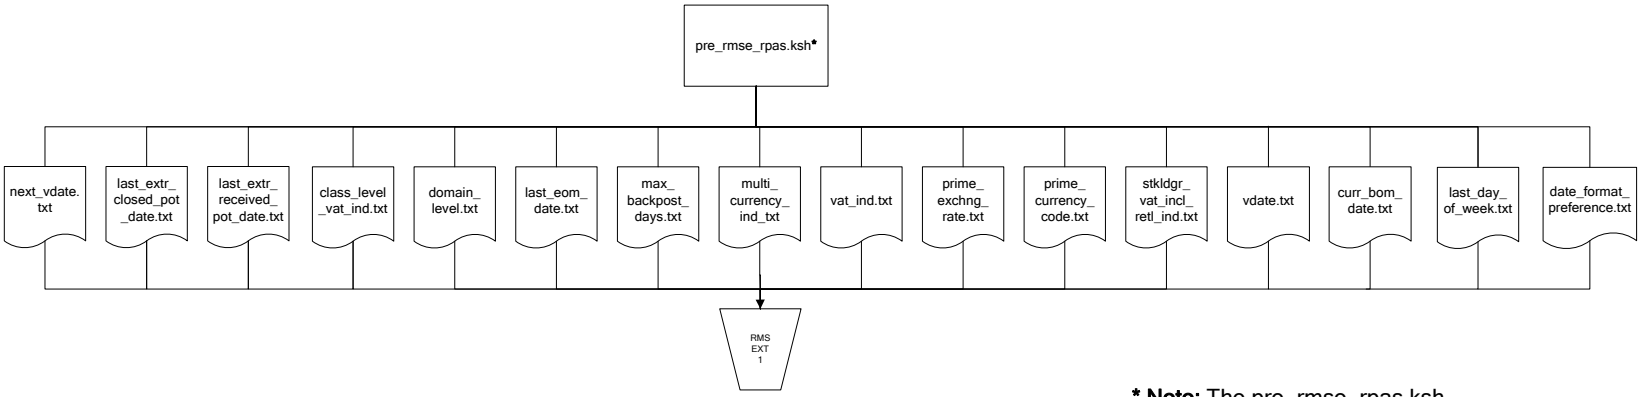

*** Note:** The pre_rmse_rpas.ksh program checks for existing .txt output files. Because of this validation, retailers running the program for the first time should include an optional -c parameter. This parameter allows the program to run successfully without pre-existing .txt output files.

RMS Foundation Data Extract Diagrams

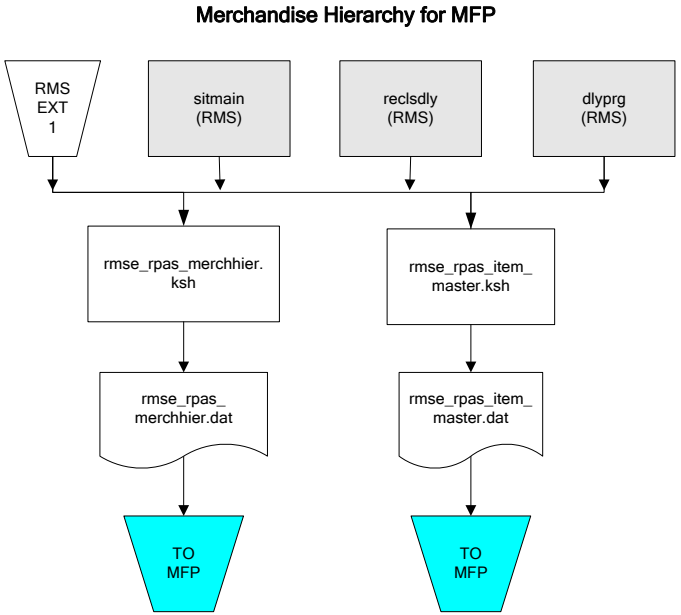

Organization Hierarchy for MFP

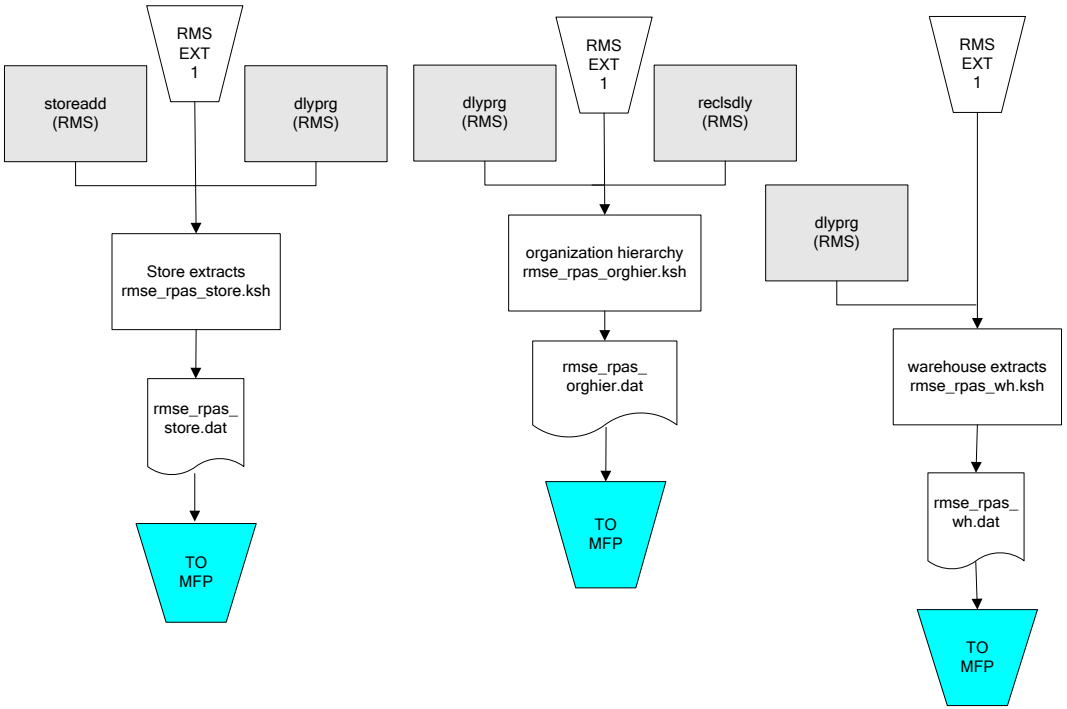

Time Extract

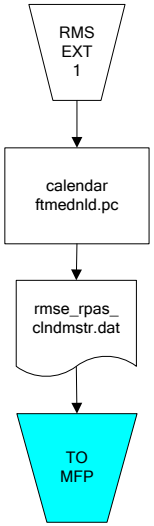

RMS Fact Data Extract Diagrams

Integration Extracts for MFP

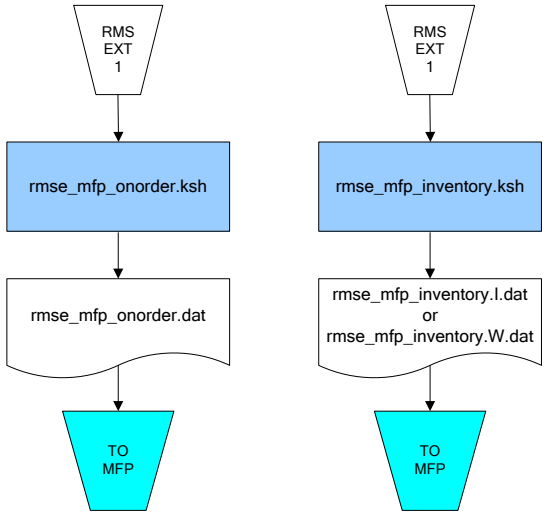

Note:
I is for initial load and W is for weekly load..

6

Interface Diagrams for RMS and RDW

RMS works in conjunction with the Oracle Retail Extract Transform and Load (RETL) framework. RETL provides high-performance processing to extract data from Oracle Retail applications for use in data warehouses. The architecture allows database batch processes to take advantage of parallel processing capabilities.

This chapter presents flow diagrams for the RETL extraction RMS programs. The source system's program or output file is illustrated, along with the program or process that interfaces with the source. Note that the data flows are organized according to the logic (dimension data and table data) of Oracle Retail Data Warehouse (RDW), but you can use the data to suit your business needs.

For detailed information about dimensions and facts, see the *Oracle Retail Data Warehouse Operations Guide*.

For summary information about the configuration, architecture, and features of RETL programs utilized in RMS/ReSA extractions, see the *Oracle Retail Management System Operations Guide Volume 3 – Backend Configuration and Operations*. For more information about the RETL tool, see the current *RETL Programmer's Guide*.

Legend

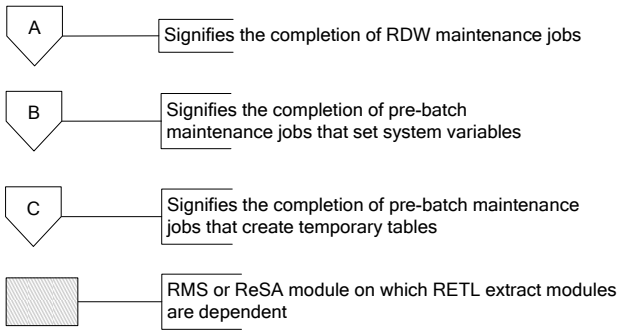

RDW Maintenance

Note:
The modules in this flow are RDW RETL scripts. If the retailer uses RDW, this flow must be completed before starting the pre-batch maintenance flow. If the retailer does not use RDW, these jobs are not required.

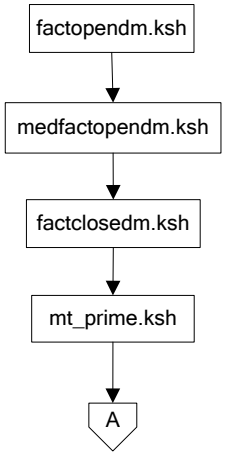

Pre-Batch Maintenance

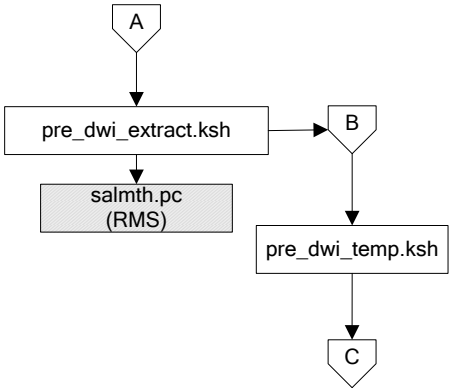

Note:
salmth.pc resets the last eom_date. Thus, it must be run after the system indicator is extracted by pre_dwi_extract.ksh.

Post-Batch Maintenance



Dimension Dataflows

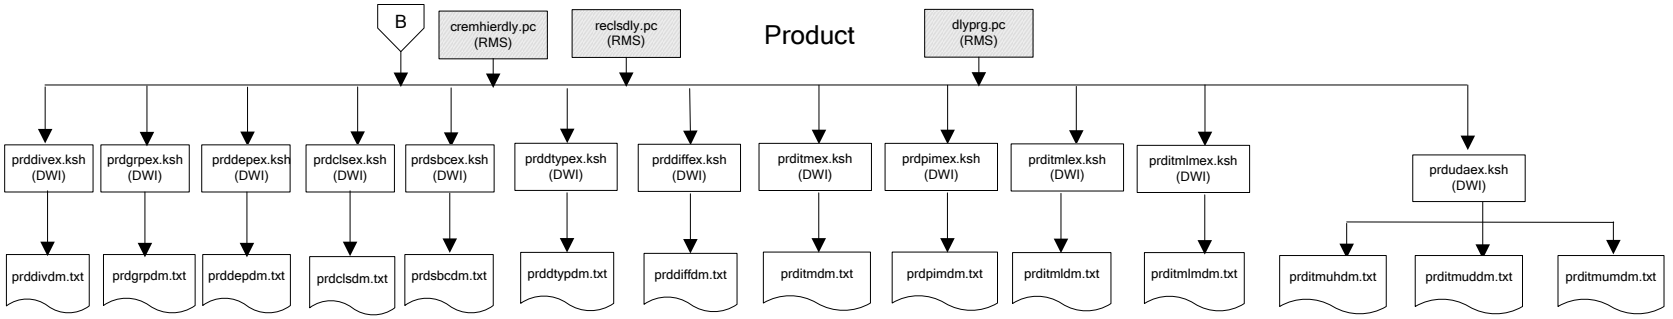

Dimension Dataflows

Organization

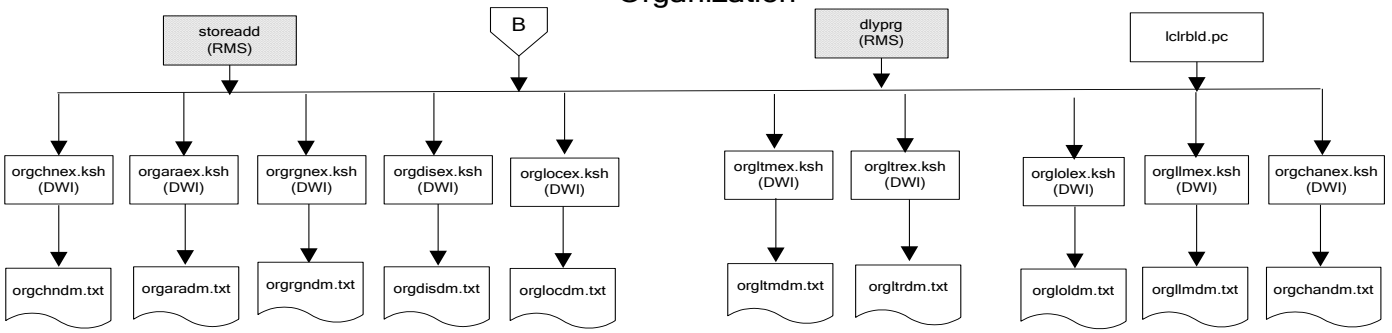

Supplier Dimension

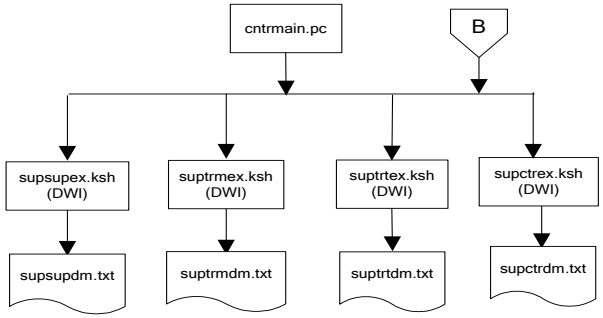

Item-Supplier-Location Matrix Dimension



Item-Supplier Dimension



Dimension Dataflows

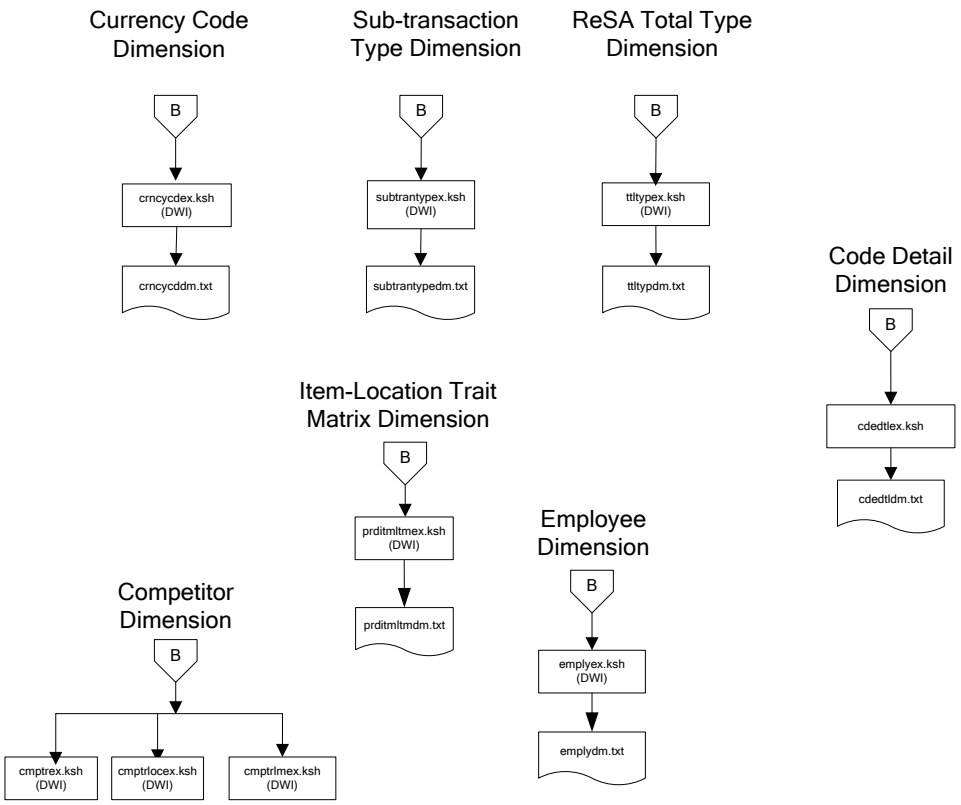

Dimension Dataflows

Product Season Dimension

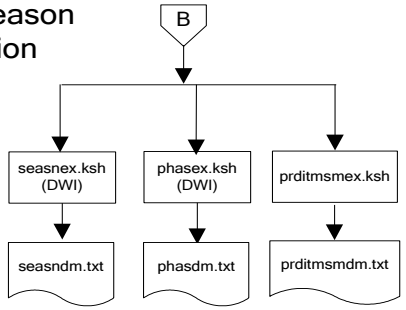

Tender Type Dimension



Reason Dimension



Regionality Dimension



Fact Dataflows

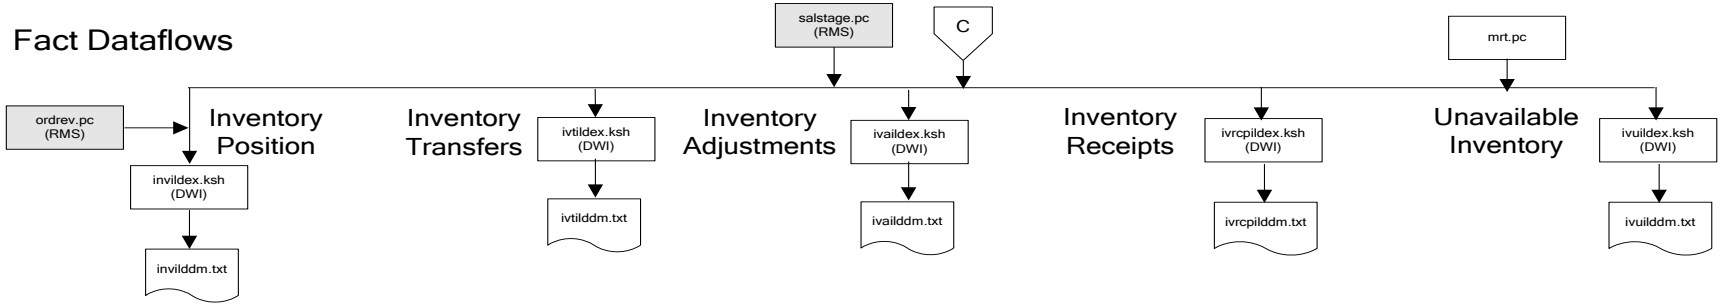

Markdowns



Fact Dataflows

Cost

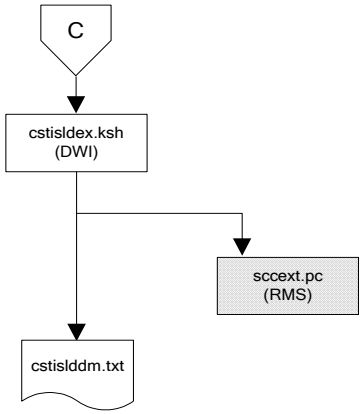

Competitor Pricing



RPM Pricing



Stock Ledger

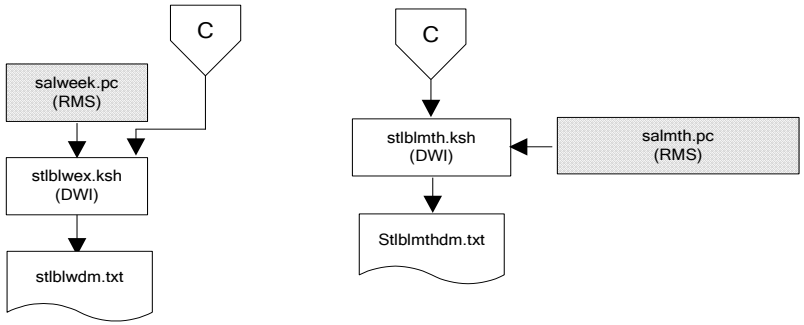

Note:
Run stock ledger fact loads once weekly.

Fact Dataflows

Supplier Availability

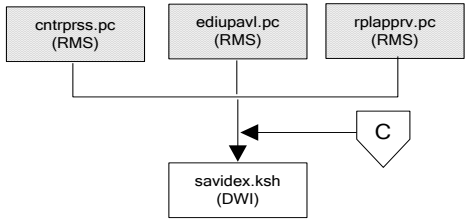

Supplier Contract

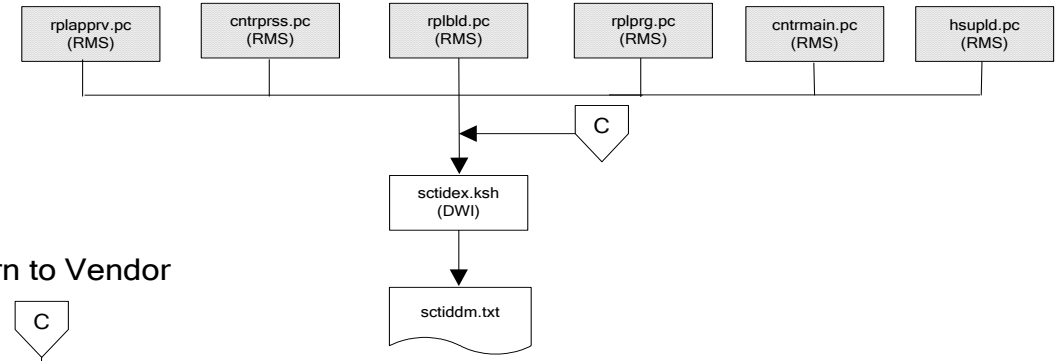

Return to Vendor



Net Cost



Fact Dataflows

Exchange Rates



Sales Forecasts



Note:
Run sales forecast fact loads once weekly.

Fact Dataflows

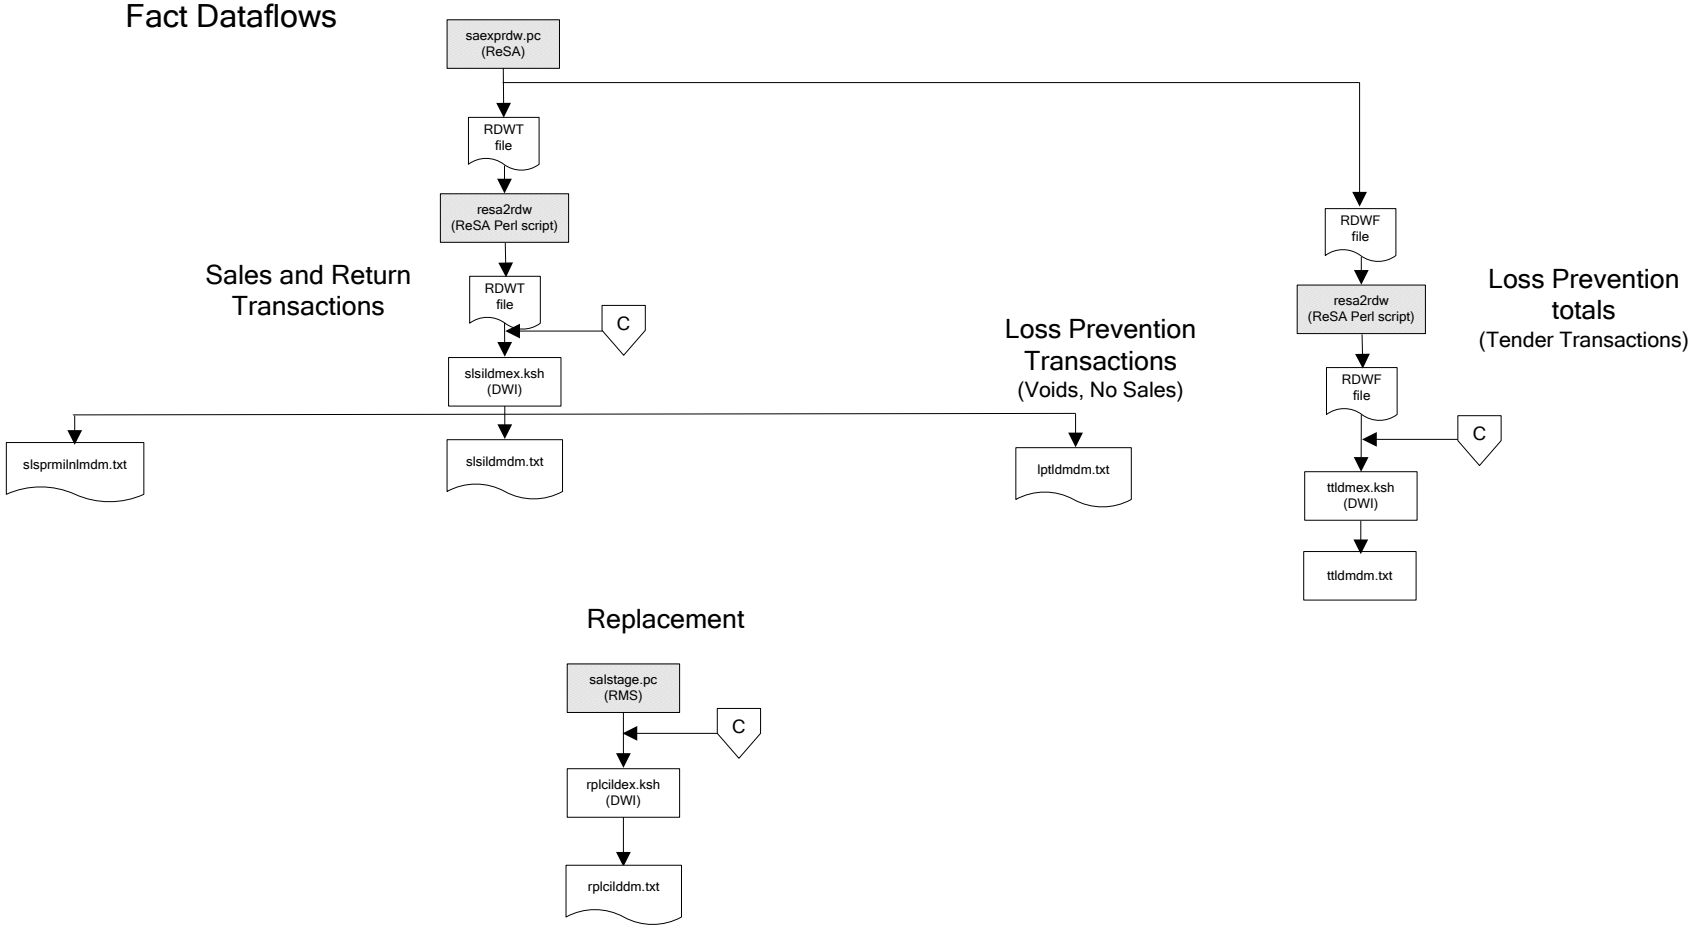

Replacement

Fact Dataflows

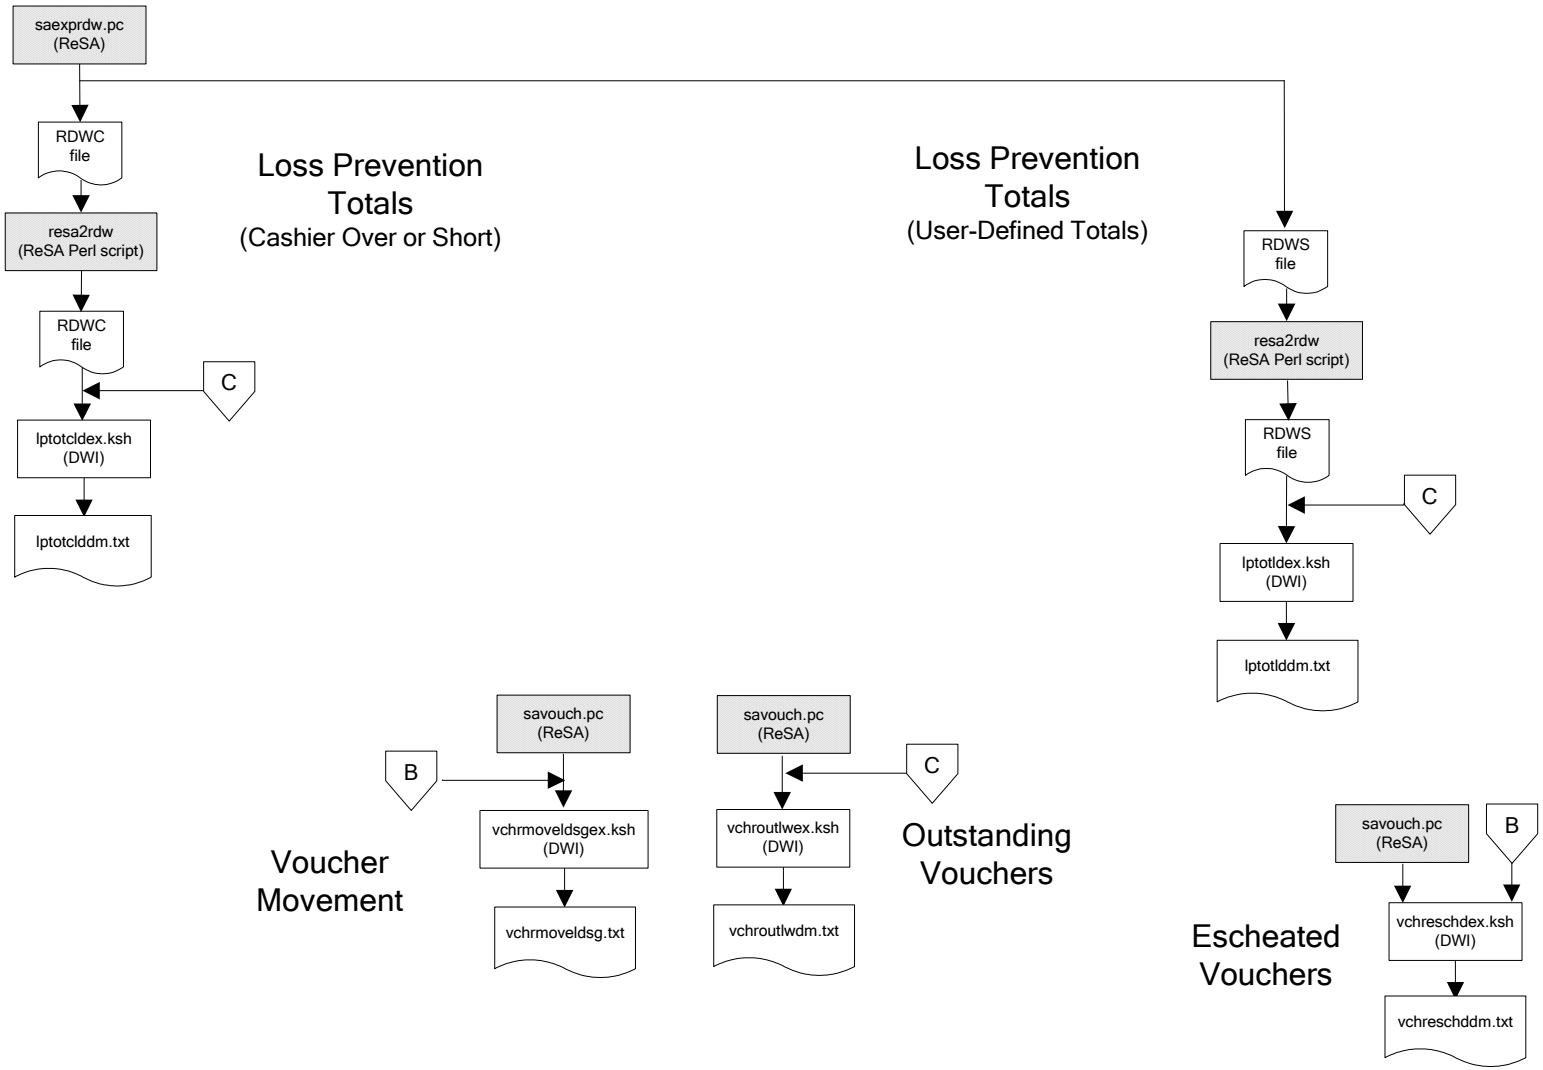

Fact Dataflows

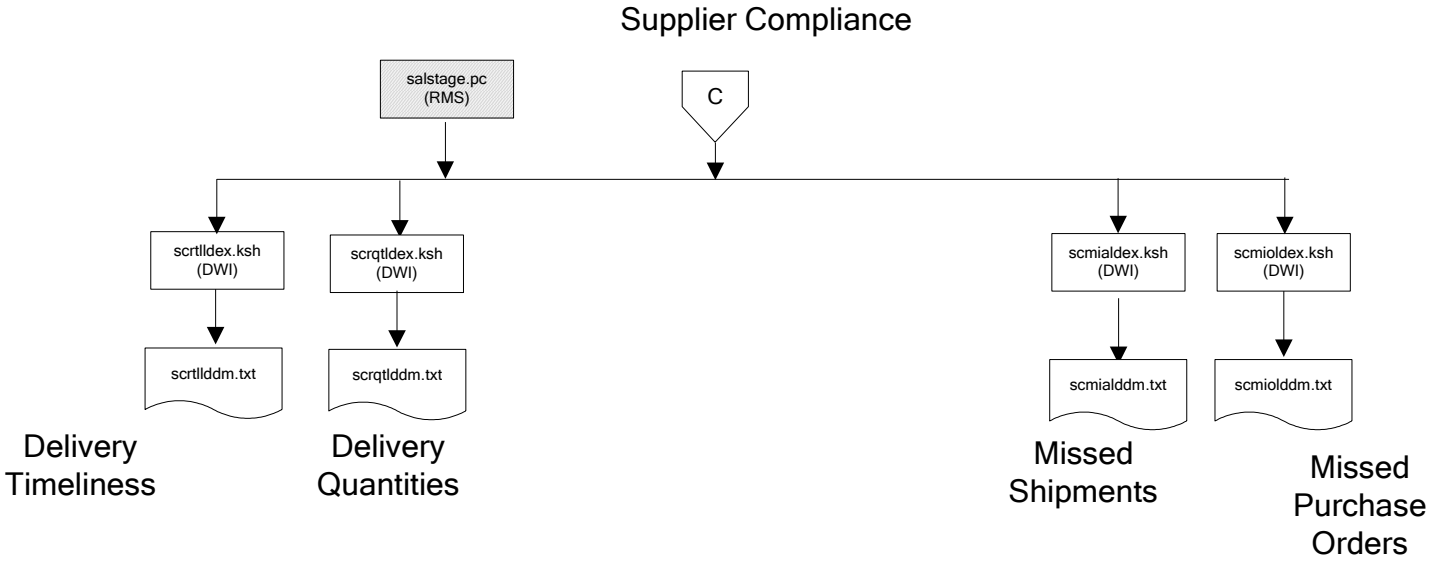

7

Interface Diagram for RPM and RDW

This following program flow diagram shows the RETL extraction program that extracts the Promotion dimension from RPM through the Data Warehouse Interface (DWI). The diagram shows the output files and the scripts that interface with the source. Note that the outputs are based on the logic (dimension data and table data) of Oracle Retail Data Warehouse (RDW), but you can use the data to suit your business needs.

For detailed information about dimensions and facts, see the *Oracle Retail Data Warehouse Operations Guide*.

See the *Oracle Retail Merchandising System Operations Guide Volume 1 – Batch Overviews and Designs* for more information about the modules shown in the following diagram.

Legend

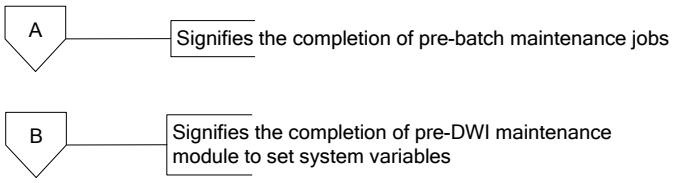

Program Flow Diagram

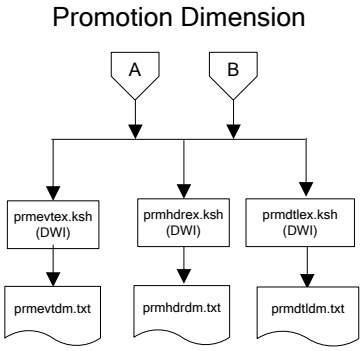

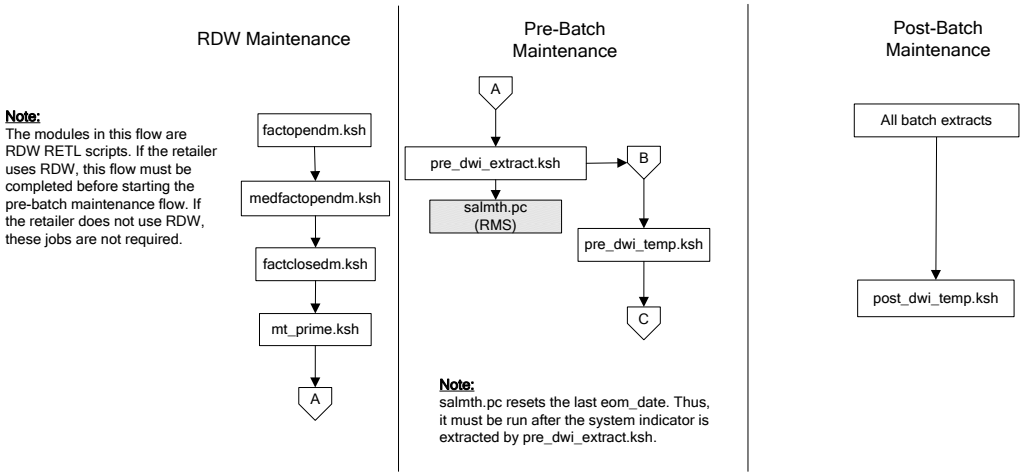
RDW Maintenance
Pre-Batch Maintenance
Post-Batch Maintenance
Note:
The modules in this flow are RDW RETL scripts. If the retailer uses RDW, this flow must be completed before starting the pre-batch maintenance flow. If the retailer does not use RDW, these jobs are not required.
factopendm.ksh
medfactopendm.ksh
factclosedm.ksh
mt_prime.ksh
A
A
pre_dwi_extract.ksh
B
salmth.pc (RMS)
pre_dwi_temp.ksh
C
Note:
salmth.pc resets the last eom_date. Thus, it must be run after the system indicator is extracted by pre_dwi_extract.ksh.
All batch extracts
post_dwi_temp.ksh

8

Interface Diagram for ReIM and RDW

This following program flow diagram shows the RETL extraction program that extracts the Promotion dimension from ReIM through the Data Warehouse Interface (DWI). The diagram shows the output files and the scripts that interface with the source. Note that the outputs are based on the logic (dimension data and table data) of Oracle Retail Data Warehouse (RDW), but you can use the data to suit your business needs.

For detailed information about dimensions and facts, see the *Oracle Retail Data Warehouse Operations Guide*.

See the *Oracle Retail Merchandising System Operations Guide Volume 1 – Batch Overviews and Designs* for more information about the modules shown in the following diagram.

Legend

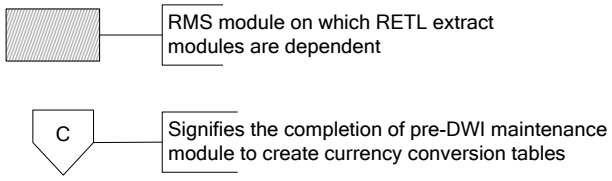

Program Flow Diagram



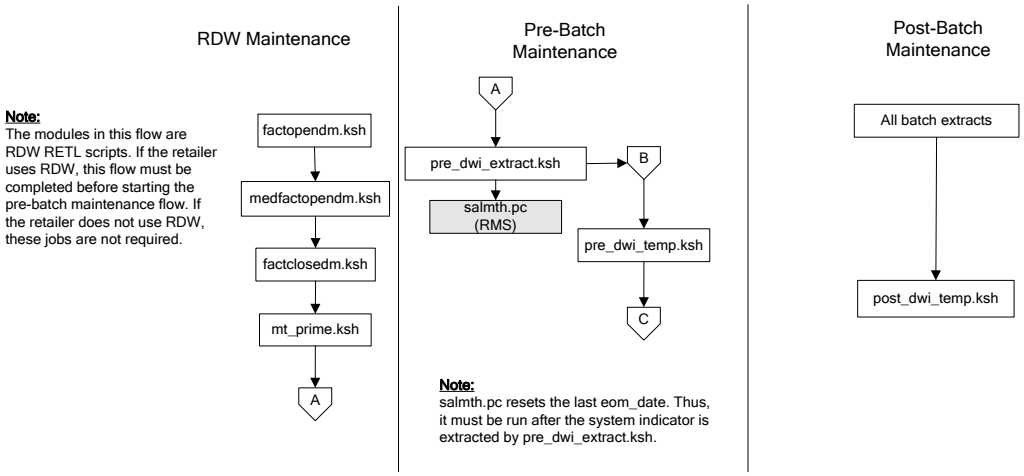
RDW Maintenance
Pre-Batch Maintenance
Post-Batch Maintenance
Note:
The modules in this flow are RDW RETL scripts. If the retailer uses RDW, this flow must be completed before starting the pre-batch maintenance flow. If the retailer does not use RDW, these jobs are not required.
factopendm.ksh
medfactopendm.ksh
factclosedm.ksh
mt_prime.ksh
A
A
pre_dwi_extract.ksh
B
salmth.pc (RMS)
pre_dwi_temp.ksh
C
Note:
salmth.pc resets the last eom_date. Thus, it must be run after the system indicator is extracted by pre_dwi_extract.ksh.
All batch extracts
post_dwi_temp.ksh

9

Interface Diagrams for RMS and AIP

This chapter presents flow diagrams for RETL extract data processing from RMS to AIP. The RMS program or output file is illustrated, along with the program or process that interfaces with the source. The diagrams illustrate the flow of the data after initial interface processing of the source.

Before setting up a program schedule, familiarize yourself with the functional and technical constraints associated with each program. See the *Oracle Retail Merchandising System Operations Guide Volume 1 – Batch Overviews and Designs* for more information about the modules shown in the following diagrams.

RMS Pre/Post Extract Diagrams

RMS Pre RETL Extract Maintenance

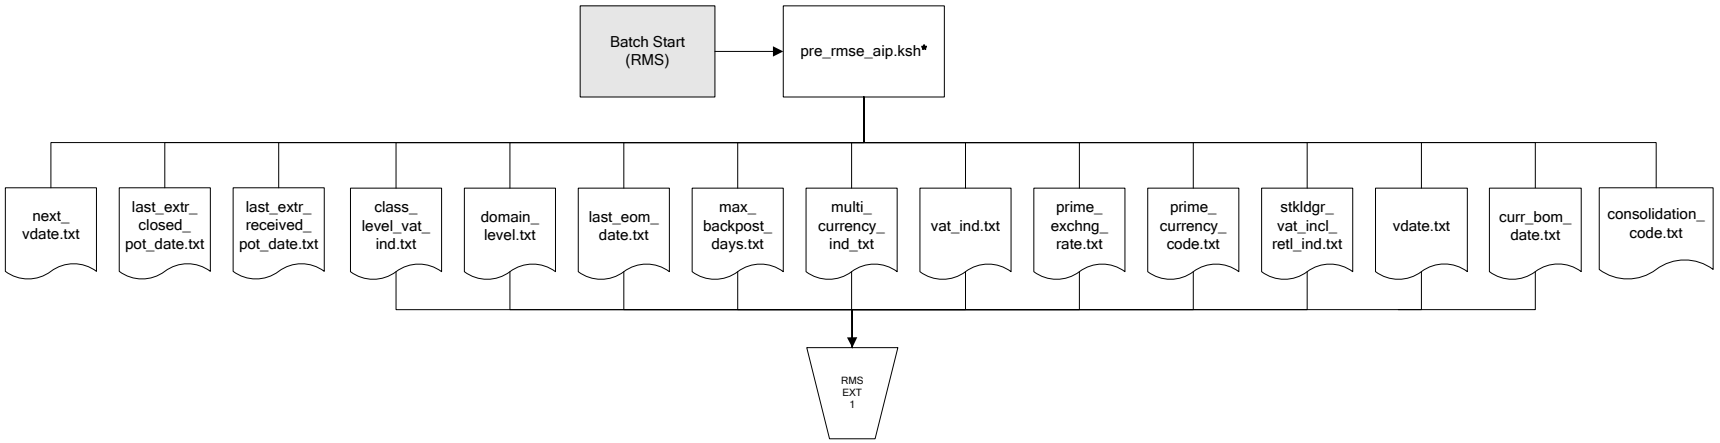

RMS Foundation Data Extract Diagrams

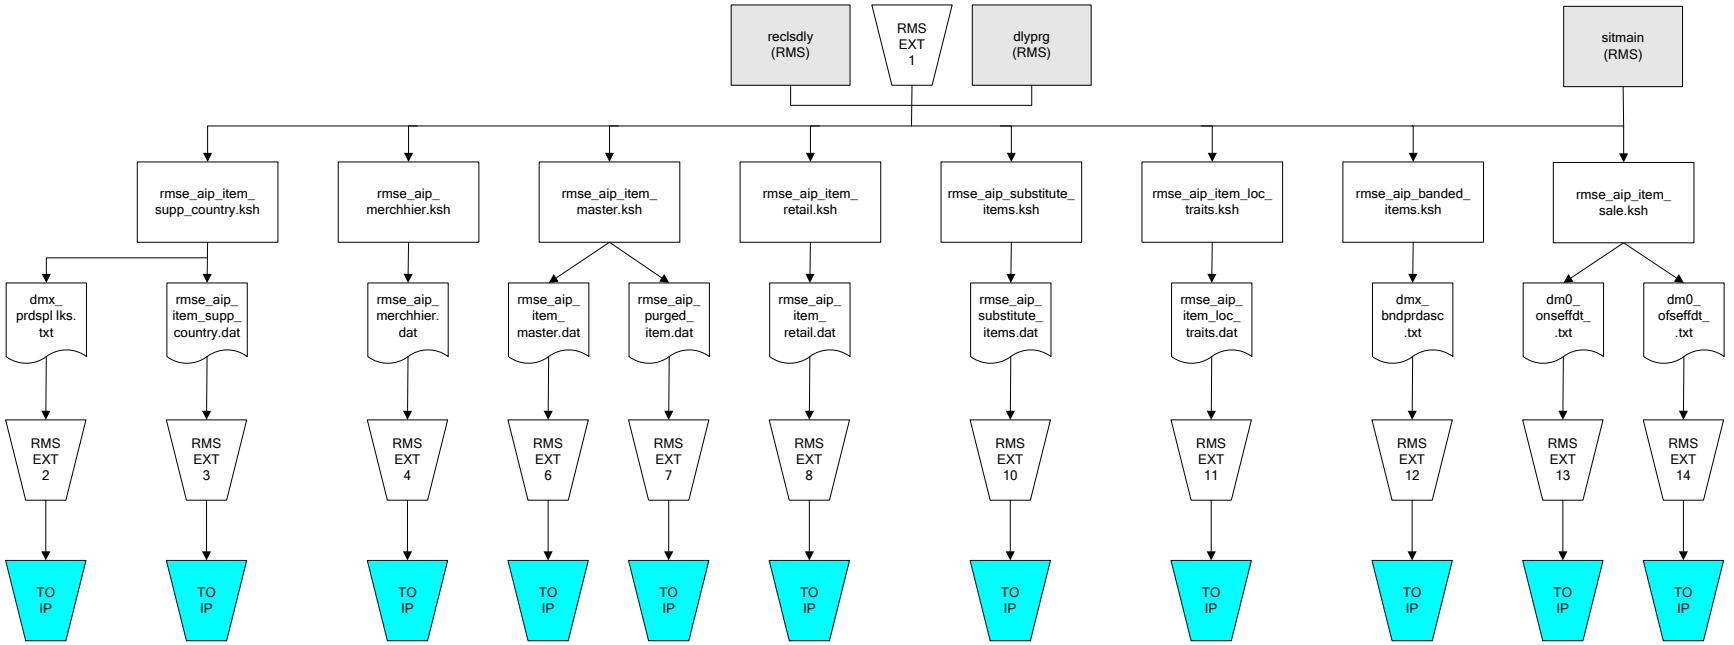

IP = Time-phased inventory planning tool

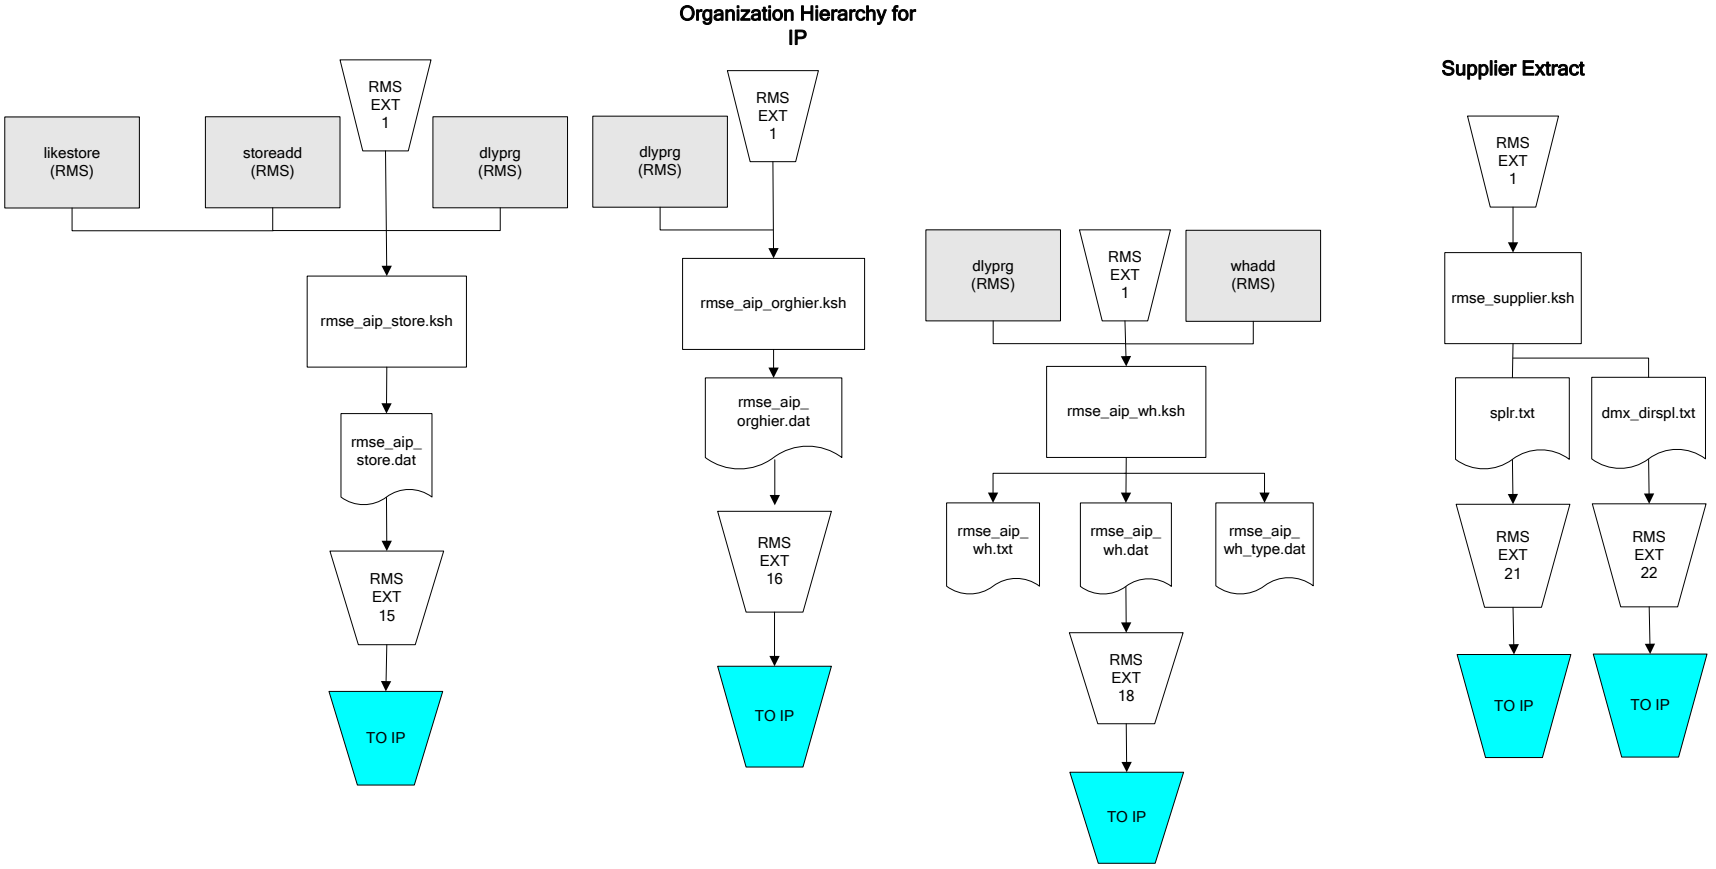

IP = Time-phased inventory planning tool

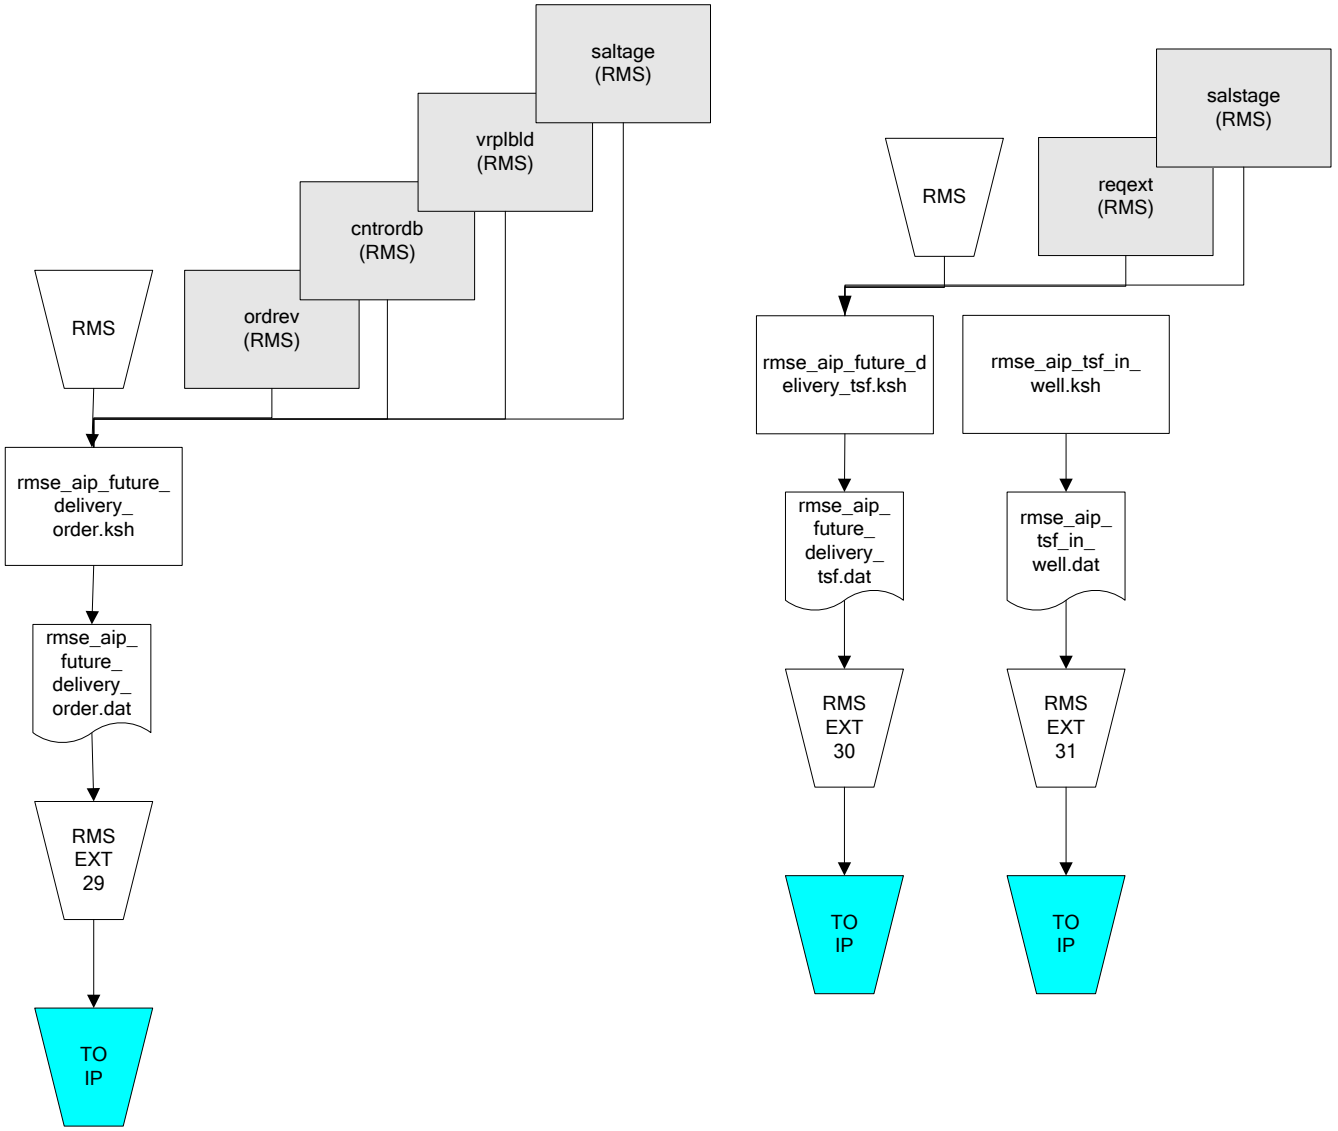

IP = Time-phased inventory planning tool

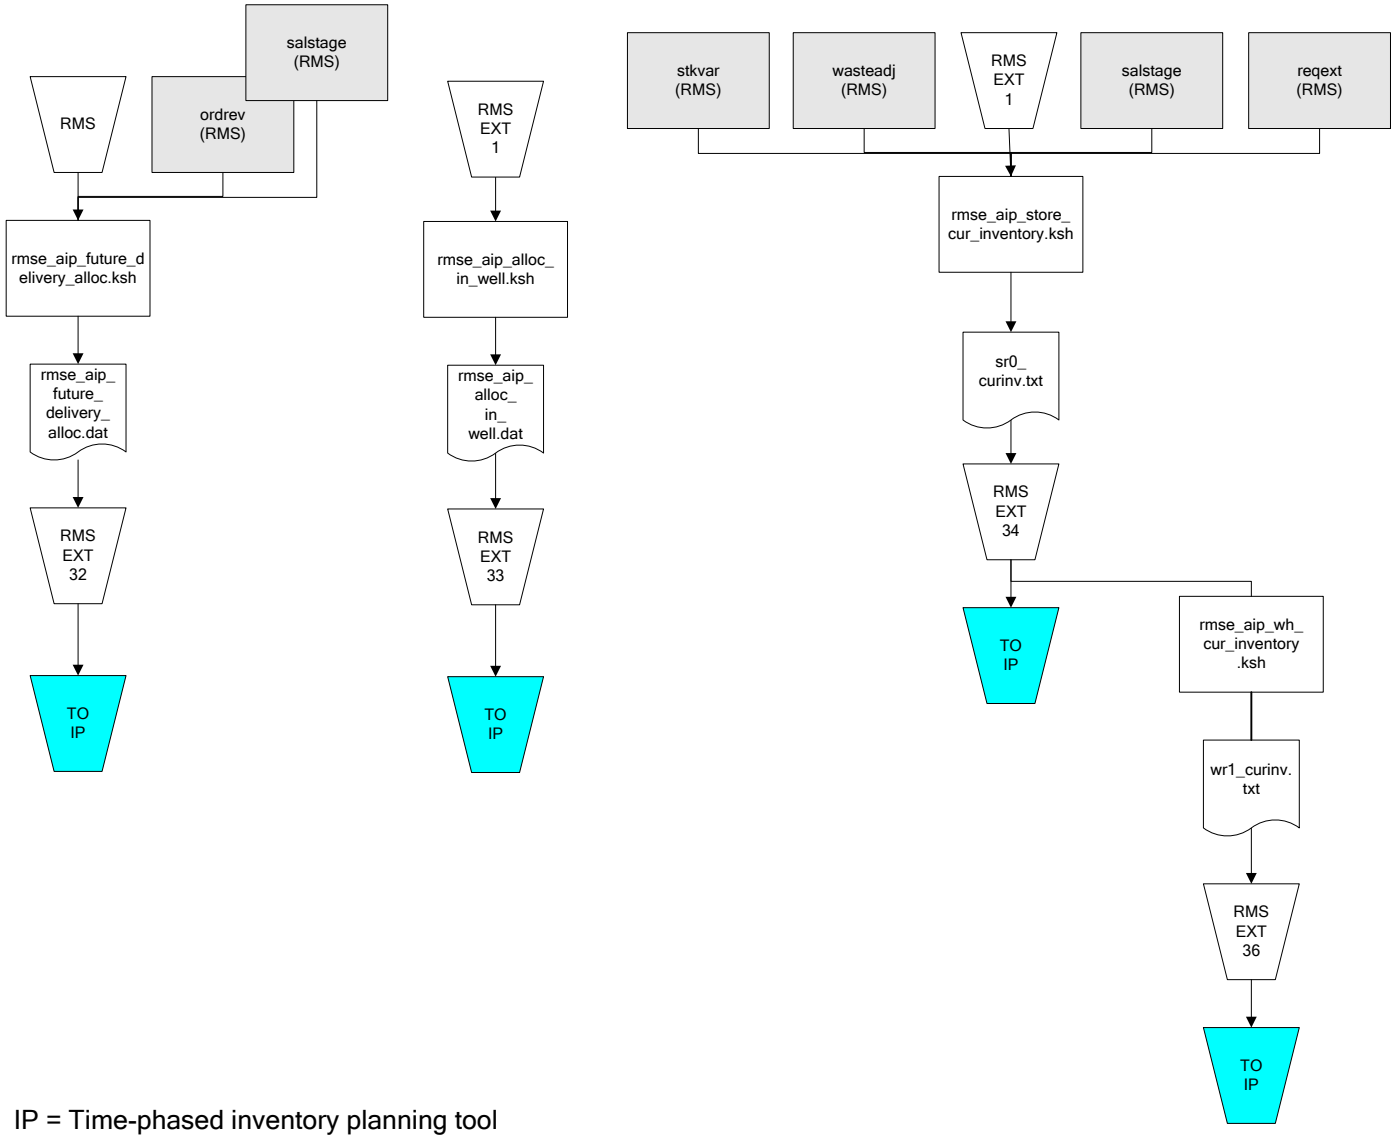

IP = Time-phased inventory planning tool

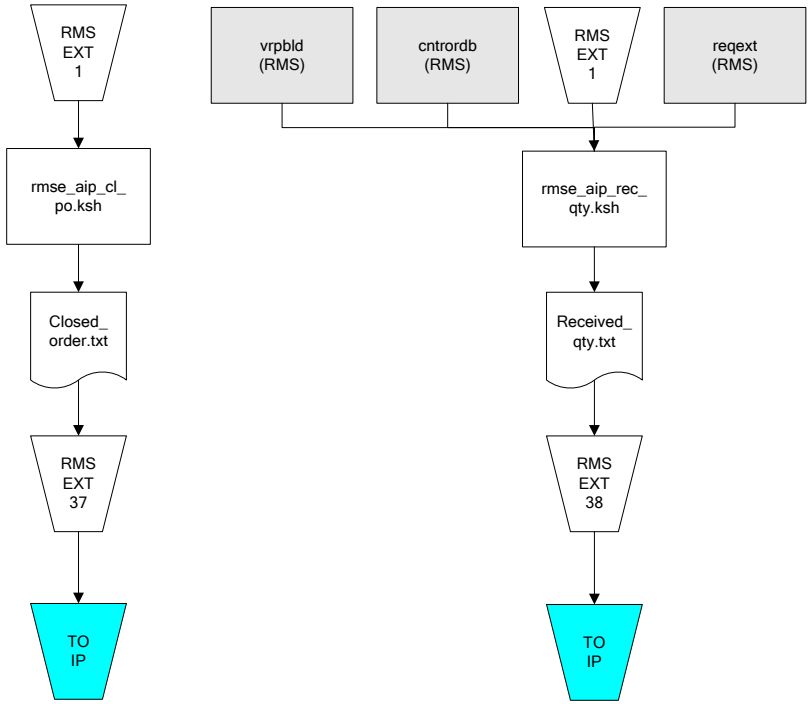

IP = Time-phased inventory planning tool