

Oracle® Retail Service Layer
Installation Guide
Release 13.0.2

January 2009

Copyright © 2009, Oracle. All rights reserved.

Primary Author: Nathan Young

The Programs (which include both the software and documentation) contain proprietary information; they are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright, patent, and other intellectual and industrial property laws. Reverse engineering, disassembly, or decompilation of the Programs, except to the extent required to obtain interoperability with other independently created software or as specified by law, is prohibited.

The information contained in this document is subject to change without notice. If you find any problems in the documentation, please report them to us in writing. This document is not warranted to be error-free. Except as may be expressly permitted in your license agreement for these Programs, no part of these Programs may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose.

If the Programs are delivered to the United States Government or anyone licensing or using the Programs on behalf of the United States Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the Programs, including documentation and technical data, shall be subject to the licensing restrictions set forth in the applicable Oracle license agreement, and, to the extent applicable, the additional rights set forth in FAR 52.227-19, Commercial Computer Software—Restricted Rights (June 1987). Oracle Corporation, 500 Oracle Parkway, Redwood City, CA 94065

The Programs are not intended for use in any nuclear, aviation, mass transit, medical, or other inherently dangerous applications. It shall be the licensee's responsibility to take all appropriate fail-safe, backup, redundancy and other measures to ensure the safe use of such applications if the Programs are used for such purposes, and we disclaim liability for any damages caused by such use of the Programs.

Oracle, JD Edwards, PeopleSoft, and Siebel are registered trademarks of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

The Programs may provide links to Web sites and access to content, products, and services from third parties. Oracle is not responsible for the availability of, or any content provided on, third-party Web sites. You bear all risks associated with the use of such content. If you choose to purchase any products or services from a third party, the relationship is directly between you and the third party. Oracle is not responsible for: (a) the quality of third-party products or services; or (b) fulfilling any of the terms of the agreement with the third party, including delivery of products or services and warranty obligations related to purchased products or services. Oracle is not responsible for any loss or damage of any sort that you may incur from dealing with any third party.

Value-Added Reseller (VAR) Language

Oracle Retail VAR Applications

The following restrictions and provisions only apply to the programs referred to in this section and licensed to you. You acknowledge that the programs may contain third party software (VAR applications) licensed to Oracle. Depending upon your product and its version number, the VAR applications may include:

- (i) the software component known as **ACUMATE** developed and licensed by Lucent Technologies Inc. of Murray Hill, New Jersey, to Oracle and imbedded in the Oracle Retail Predictive Application Server – Enterprise Engine, Oracle Retail Category Management, Oracle Retail Item Planning, Oracle Retail Merchandise Financial Planning, Oracle Retail Advanced Inventory Planning, Oracle Retail Demand Forecasting, Oracle Retail Regular Price Optimization, Oracle Retail Size Profile Optimization, Oracle Retail Replenishment Optimization applications.
- (ii) the **MicroStrategy** Components developed and licensed by MicroStrategy Services Corporation (MicroStrategy) of McLean, Virginia to Oracle and imbedded in the MicroStrategy for Oracle Retail Data Warehouse and MicroStrategy for Oracle Retail Planning & Optimization applications.
- (iii) the **SeeBeyond** component developed and licensed by Sun Microsystems, Inc. (Sun) of Santa Clara, California, to Oracle and imbedded in the Oracle Retail Integration Bus application.
- (iv) the **Wavelink** component developed and licensed by Wavelink Corporation (Wavelink) of Kirkland, Washington, to Oracle and imbedded in Oracle Retail Mobile Store Inventory Management.
- (v) the software component known as **Crystal Enterprise Professional and/or Crystal Reports Professional** licensed by SAP and imbedded in Oracle Retail Store Inventory Management.
- (vi) the software component known as **Access Via**TM licensed by Access Via of Seattle, Washington, and imbedded in Oracle Retail Signs and Oracle Retail Labels and Tags.
- (vii) the software component known as **Adobe Flex**TM licensed by Adobe Systems Incorporated of San Jose, California, and imbedded in Oracle Retail Promotion Planning & Optimization application.
- (viii) the software component known as **Style Report**TM developed and licensed by InetSoft Technology Corp. of Piscataway, New Jersey, to Oracle and imbedded in the Oracle Retail Value Chain Collaboration application.
- (ix) the software component known as **DataBeacon**TM developed and licensed by Cognos Incorporated of Ottawa, Ontario, Canada, to Oracle and imbedded in the Oracle Retail Value Chain Collaboration application.

You acknowledge and confirm that Oracle grants you use of only the object code of the VAR Applications. Oracle will not deliver source code to the VAR Applications to you. Notwithstanding any other term or condition of the agreement and this ordering document, you shall not cause or permit alteration of any VAR Applications. For purposes of this section, “alteration” refers to all alterations, translations, upgrades, enhancements, customizations or modifications of all or any portion of the VAR Applications including all reconfigurations, reassembly or reverse assembly, re-engineering or reverse engineering and recompilations or reverse compilations of the VAR Applications or any derivatives of the VAR Applications. You acknowledge that it shall be a breach of the agreement to utilize the relationship, and/or confidential information of the VAR Applications for purposes of competitive discovery.

The VAR Applications contain trade secrets of Oracle and Oracle’s licensors and Customer shall not attempt, cause, or permit the alteration, decompilation, reverse engineering, disassembly or other reduction of the VAR Applications to a human perceivable form. Oracle reserves the right to replace, with functional equivalent software, any of the VAR Applications in future releases of the applicable program.

Contents

Preface	vii
Audience	vii
Related Documents.....	vii
Customer Support.....	vii
Review Patch Documentation.....	vii
Oracle Retail Documentation on the Oracle Technology Network.....	viii
Conventions.....	viii
1 Preinstallation Tasks	1
Prerequisites	1
Check Application Server Requirements.....	1
Check Oracle Retail Software Dependencies	1
2 Application Installation	3
Create a New OC4J Instance and Group for RSLfor<App>	3
Expand the RSLfor<App> Distribution.....	4
Run the RSLfor<App> Installer	4
Resolving Errors Encountered During Application Installation.....	4
Backups Created by Installer.....	4
A Appendix: RSLfor<App> Installer Screens	5
Retail Service Layer 13 Installer Screens and Details.....	5
B Appendix: Installer Silent Mode	13
Repeating the Installation Process	13
C Appendix: Common Installation Errors.....	15
Unreadable Buttons in the Installer	15
“Unable to get a deployment manager” Message	15
“Could not create system preferences directory” Warning	16
ConcurrentModificationException in Installer GUI.....	16
“Couldn't find X Input Context” Warnings	16
Error While Unpacking the rsl-rms.ear File	17
D Appendix: URL Reference	19
JDBC URL for a Database	19
JNDI Provider URL for an Application	19
Deployer URI.....	20
E Appendix: Installation Order	21

Preface

The Oracle Retail Service Layer development team delivers RSL “applications” only for non-Java/Java EE service providers such as RMS (Oracle Forms based). Other implementations of RSL exist but are bundled within other Oracle Retail Java EE applications and are installed as part of those applications. Currently RSL provides an implementation for integrating applications to RMS. RPM is the only Oracle Retail Java EE application that provides an implementation of RSL integrated with their application. An application-specific version of RSL in a Java EE environment is referred to as RSLfor<App> (for this release only RSLforRMS). This application is packaged as an EAR file that must be deployed in an application server. Currently, RSL applications have been certified to install and execute in Oracle Application Server 10g.

Audience

This manual is designed for System Administrators, Developers, and Applications Support personnel installing the RSL for <app> implementation provided by the RSL team.

Related Documents

For more information, see the following documents in the Oracle Retail Service Layer Release 13.0.2 documentation set:

- *Oracle Retail Service Layer Release Notes*

Customer Support

To contact Oracle Customer Support, access My Oracle Support at the following URL:
<https://metalink.oracle.com>

When contacting Customer Support, please provide the following:

- Product version and program/module name
- Functional and technical description of the problem (include business impact)
- Detailed step-by-step instructions to re-create
- Exact error message received
- Screen shots of each step you take

Review Patch Documentation

If you are installing the application for the first time, you install either a base release (for example, 13.0) or a later patch release (for example, 13.0.2). If you are installing a software version other than the base release, be sure to read the documentation for each patch release (since the base release) before you begin installation. Patch documentation can contain critical information related to the base release and code changes that have been made since the base release.

Oracle Retail Documentation on the Oracle Technology Network

In addition to being packaged with each product release (on the base or patch level), all Oracle Retail documentation is available on the following Web site (with the exception of the Data Model which is only available with the release packaged code):

http://www.oracle.com/technology/documentation/oracle_retail.html

Documentation should be available on this Web site within a month after a product release. Note that documentation is always available with the packaged code on the release date.

Conventions

Navigate: This is a navigate statement. It tells you how to get to the start of the procedure and ends with a screen shot of the starting point and the statement “the Window Name window opens.”

Note: This is a note. It is used to call out information that is important, but not necessarily part of the procedure.

This is a code sample
It is used to display examples of code

A hyperlink appears like this.

Preinstallation Tasks

Prerequisites

Check Application Server Requirements

Supported on:	Versions Supported:
Application Server OS	UNIX based OS certified with Oracle Application Server 10g 10.1.3.3. - Oracle Enterprise Linux 4 Patch 5 for Linux x86-64 - Solaris 10 (SPARC) - HP-UX 11.31 (Integrity) - AIX 5.3
Application Server	Oracle Application Server 10g 10.1.3.3 with the following patches: 5632264 (NEED UPDATED TIMEZONE FILES (VERSION 4) FOR MORE DST RULE CHANGES) 5398506 (RUNTIME EXCEPTION DID NOT ROLLBACK MESSAGE ON EGATE (SEEBEYOND) TOPIC)

Note: This release of RSLfor<App> is only supported in a managed OC4J instance as part of Oracle AS 10g. It is not supported on OC4J standalone

Check Oracle Retail Software Dependencies

Service Providing Application (e.g. RMS) must have all of the RSL components installed (such as Stored Procedures, Tables, Oracle Objects). Refer to that application's installation guide for specifics.

Supported Oracle Retail Products

Integrates with:	Version
Oracle Retail Allocation (Client)	13.0.2
Oracle Retail Store Inventory Management (SIM)	13.0.2
Oracle Retail Merchandising System (RMS) (Server)	13.0.2
Oracle Retail Price Management (RPM) (Server)	13.0.2

Application Installation

Before proceeding you must install Oracle Application Server 10g 10.1.3.3 as well as the patches listed in Chapter 1 of this document. The RSLfor<App> application will be deployed to an OC4J instance within the OracleAS10g installation.

Create a New OC4J Instance and Group for RSLfor<App>

Skip to the next section if you are redeploying to an existing OC4J group in Oracle Application Server 10.1.3.3.

The RSLfor<App> application must be deployed to its own dedicated OC4J group. For instructions on how to create a new OC4J group and instance(s), see *Adding and Deleting OC4J Instances* in the *Reconfiguring Application Server Instances* chapter of the *Oracle Application Server Administrator's Guide*.

1. Log into the server which is running your OracleAS10g installation. Set your ORACLE_HOME environment variable to point to this installation.
2. Choose a name for the new OC4J instance and group.

Example:

```
rs1-oc4j
rs1_group
```

Create this OC4J instance and group as documented in the *Oracle Application Server Administrator's Guide*.

Example:

```
$ORACLE_HOME/bin/createinstance
-instanceName rs1-oc4j -groupName rs1_group
```

When prompted for the oc4jadmin password, provide the same administrative password you gave for the Oracle AS installation. All OC4J instances running Oracle Retail applications must have the same oc4jadmin password.

3. Start the OC4J instance. You can do this through the Enterprise Manager Web interface, or on the command line using the opmnctl utility:

Example:

```
$ORACLE_HOME/opmn/bin/opmnctl @cluster
startproc ias-component=rs1_group
```

4. Verify that the OC4J group was fully started. If you are using the Enterprise Manager Web interface, the instance(s) should have a green arrow indicating that they are running. On the command line, verify that each instance has a status of "Alive."

Example:

```
$ORACLE_HOME/opmn/bin/opmnctl status
```

If you are unable to start an OC4J instance after several attempts, try increasing the startup timeouts in ORACLE_HOME/opmn/conf/opmn.xml. If that does not help, consult the Oracle Application Server documentation for further assistance.

Expand the RSLfor<App> Distribution

1. Log in to the UNIX server where Oracle AS is installed and determine where the RSL 13.0.2 application server file (RslServerPak13.0.2for<app><app_version>_eng_ga.tar) will be installed. There should be a minimum of 25 MB disk space available for the application installation files.
2. Copy RslServerPak13.0.2for<app><app_version>_eng_ga.tar (located at CD/appserverunix) to a newly created staging directory on the UNIX server.
3. Change directory to the location of RslServerPak13.0.2for<app><app_version>_eng_ga.tar and extract this file. This will create directory: /RSL1302for<App>.
RSL_INSTALL_HOME refers to the directory structure including the newly created /RSL1302for<App>
Example: /u00/product/10.1.3/OracleAS_2/RSL1301forRMS

Run the RSLfor<App> Installer

Configuration scripts are provided to deploy and configure the RSLfor<App> application in Oracle AS, including its JDBC DataSource and shared library using the OC4J command-line utility.

1. Change directory to RSL_INSTALL_HOME.
2. Set the ORACLE_HOME and JAVA_HOME environment variables.
ORACLE_HOME should point to your Oracle AS installation. JAVA_HOME should point to the Java 5.0 (1.5.0) JDK located at \$ORACLE_HOME/jdk.
3. If you are using an X server, such as Exceed, set the DISPLAY environment variable so that you can run the installer in GUI mode (recommended). If you are not using an X server, or the GUI is too slow over your network, unset DISPLAY for text mode.
4. Run the rsl-installer.sh script. This launches the installer. After installation is complete, a detailed installation log file is created: rsl13install.<timestamp>.log in the RSL_INSTALL_HOME/.retail-installer directory.
5. After the script has successfully run, verify that the application is running and the Oracle DataSource was configured properly by logging into the Oracle Enterprise Manager 10g Application Server Control.

Resolving Errors Encountered During Application Installation

If the application installer encounters any errors, it halts execution immediately.

See Appendix C of this document for some common installation errors.

Since the application installation is a full re-install every time, any previous partial installs will be overwritten by the successful installation.

Backups Created by Installer

The RSLfor<App> application installer backs up previous installations by renaming them with <timestamp> suffixes. This is done to prevent the removal of any custom changes you might have. These backup directories can be safely removed without affecting the current installation.

Example: rsl-rms.200605011726

Appendix: RSLfor<App> Installer Screens

Retail Service Layer 13 Installer Screens and Details

You need the following details about your environment for the installer to successfully deploy the RSLfor<App> application. Depending on the options you select, you may not see some screens or fields.

The following screens are for the RSLforRMS installer.

Screen: Data Source Details

Retail Service Layer 13 Installer - Oracle Retail

ORACLE

Data Source Details

Provide the details for the RMS data source

RMS 13 JDBC URL

RMS 13 schema

RMS 13 schema password


Fields on this Screen

Field Title	RMS 13 JDBC URL
Field Description	URL used by RSLfor<App> to access the RMS database schema. See Appendix D: URL Reference for expected syntax.
Destination	data-sources.xml
Example	jdbc:oracle:thin:@myhost:1525:mydatabase

Field Title	RMS 13 schema
Field Description	Database user where the RMS database schema was installed.
Destination	data-sources.xml
Example	RMS13


Field Title	RMS 13 schema password
Field Description	Password for the RMS schema user.
Destination	data-sources.xml
Notes	

Screen: Manual Deployment Option

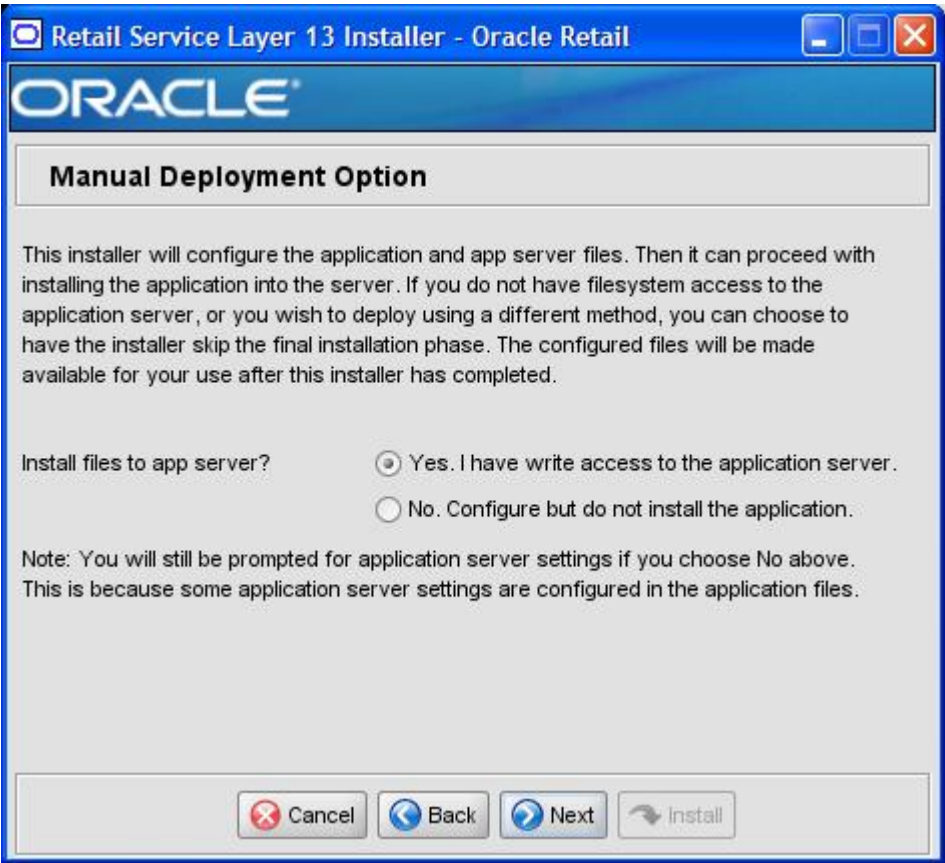

Fields on this screen:

Field Title	Install files to app server?
Field Description	If you do not have write access under ORACLE_HOME, you can still use the installer to gather your settings and configure the RSLfor<App> files locally in the staging area. Then, at a later time, an administrator can manually copy over the RSLfor<App> files and deploy the ear file. If you select this option, instructions are printed to the console and the installer log file for the steps needed to complete the installation.
Example	Yes

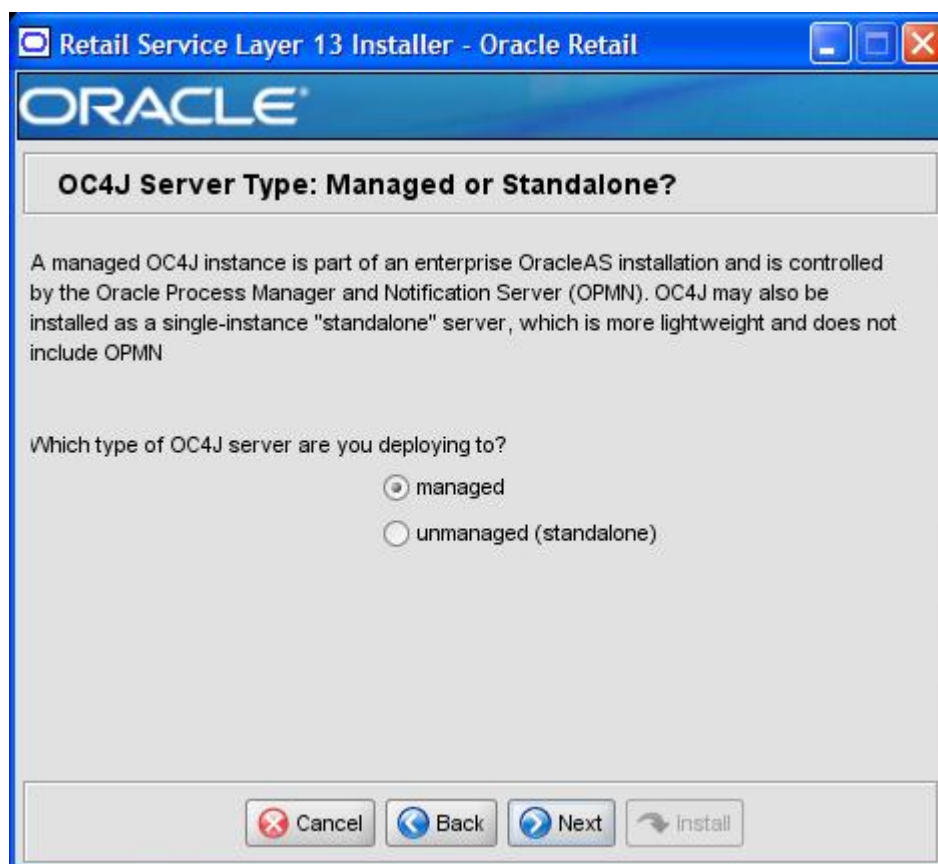Screen: OC4J Server Type: Managed or Standalone**Fields on this screen:**

Field Title	Which type of OC4J server are you deploying to?
Field Description	A managed OC4J server is part of a larger Oracle App Server enterprise environment and is managed by OPMN. A standalone OC4J server is a single instance installed by itself and is not controlled by OPMN. This Oracle Retail application release is only supported on managed OC4J.
Example	managed

Screen: Application Server Details – OracleAS Enterprise

Retail Service Layer 13 Installer - Oracle Retail

ORACLE®

Application Server Details - OracleAS Enterprise

Hostname

mspdev27

The OPMN request port is found in ORACLE_HOME/opmn/conf/opmn.xml

OPMN request port

6004

Cancel

Back

Next

Install

Fields on this screen:

Field Title	Hostname
Field Description	Hostname of the application server
Example	myhost

Field Title	OPMN request port
Field Description	The port on which OPMN listens for requests to forward on to OC4J instances. This port can be found in the ORACLE_HOME/opmn/conf/opmn.xml file: <code><port local="6100" remote="6200" request="6004"/></code> The installer will attempt to gather this port value from the environment and use it as the default value.
Example	6004

Screen: Application Deployment Details

Retail Service Layer 13 Installer - Oracle Retail

ORACLE

Application Deployment Details

Provide the following details for the RSLforRMS application being installed. The default values shown below are examples.

RSLforRMS OC4J instance

The OC4J instance(s) for RSLforRMS must belong to an OC4J group created specifically for this RSLforRMS deployment. This installer will deploy the RSLforRMS application into all instances in the group. If you are not clustering the application across multiple OC4J instances then you should have an RSLforRMS group with just one member OC4J instance. Do NOT use default_group in this field.

RSLforRMS OC4J group

RSLforRMS app deployment name

Fields on this screen:

Field Title	RSLforRMS OC4J instance
Field Description	Name of the OC4J instance that was created for this RSLfor<App> application.
Example	rsl_oc4j

Field Title	RSLforRMS OC4J group
Field Description	Name of the OC4J group that was created for this RSLfor<App>application. The OC4J instance given for the RSLfor<App> OC4J Instance field should be a member of this group. The installer will deploy the RSLfor<App> application to all OC4J instances which are members of this group. For this reason, you should not use default_group. A new group dedicated to RSLfor<App> should be created instead.
Example	rsl_group

Field Title	RSLforRMS app deployment name
Field Description	Name by which this RSLfor<App> application will be identified in the application server.
Example	rsl-rms

Screen: OC4J Administrative User

The screenshot shows a window titled "Retail Service Layer 13 Installer - Oracle Retail". The window has a blue header bar with the "ORACLE" logo. Below the header, the title "OC4J Administrative User" is displayed. The main area contains the instruction: "Enter the administrative user and password for the OC4J instance to which the RSL for RMS application will be deployed." There are two input fields: "OC4J admin user" with the value "oc4jadmin" and "OC4J admin password" which is empty. At the bottom, there are four buttons: "Cancel", "Back", "Next", and "Install".

Fields on this screen:

Field Title	OC4J admin user
Field Description	Username of the admin user for OC4J instance to which the RSLfor<App> application is being deployed.
Example	oc4jadmin

Field Title	OC4J admin password
Field Description	Password for the OC4J admin user. You chose this password when you created the OC4J instance (managed OC4J) or when you started the instance for the first time (standalone OC4J).

Appendix: Installer Silent Mode

Repeating the Installation Process

In addition to the GUI and text interfaces of the RSLfor<App> installer, there is a silent mode that can be run. This mode is useful if you wish to run a repeat installation attempt without going through the installer screens again.

The installer runs in two distinct phases. The first phase involves gathering settings from the user. At the end of the first phase, a properties file named `ant.install.properties` is created with the settings that were provided. Then the second phase begins, where this properties file is used to provide your settings for the installation.

To skip the first phase and re-use the `ant.install.properties` file from a previous run, perform the following procedure:

1. Edit the `RSL_INSTALL_HOME/.retail-installer/ant.install.properties` file and correct any invalid settings that may have caused the installer to fail in its previous run.
2. Run the installer again with the silent argument.

Example:

```
rsl-installer.sh silent
```

Appendix: Common Installation Errors

This section provides some common errors encountered during installation of RSLfor<App>.

Unreadable Buttons in the Installer

If you are unable to read the text within the installer buttons, it could mean that your JAVA_HOME is pointed to an older version of the JDK than is supported by the installer. Set JAVA_HOME to \$ORACLE_HOME/jdk from the Oracle Application Server 10.1.3 installation and run the installer again.

“Unable to get a deployment manager” Message

Symptom:

The application installer quits and displays the following error message:

```
[oracle:deploy] Unable to get a deployment manager.
[oracle:deploy]
[oracle:deploy] This is typically the result of an invalid deployer URI format
being supplied, the target server not being in a started state or incorrect
authentication details being supplied.
[oracle:deploy]
[oracle:deploy] More information is available by enabling logging -- please see
the Oracle Containers for J2EE Configuration and Administration Guide for details.
```

Solution:

This error can be caused by any of the following conditions:

- OC4J instance provided is not running.
- Incorrect OC4J instance name provided
- Incorrect OC4J administrative username and/or password
- Incorrect OPMN request port provided.

Make sure that the OC4J instance is running, and then check the RSL_INSTALL_HOME/.retail-installer/**ant.install.properties** file for entry mistakes. Pay close attention to the input.deployer.uri (see Appendix D: URL Reference), input.oc4j.instance, input.admin.user, and input.admin.password properties. If you need to make a correction, you can run the installer again with this file as input by running silent mode (see Appendix B of this document).

“Could not create system preferences directory” Warning

Symptom:

The following text appears in the installer **Errors** tab:

```
May 22, 2006 11:16:39 AM java.util.prefs.FileSystemPreferences$3 run
WARNING: Could not create system preferences directory. System preferences are
unusable.
May 22, 2006 11:17:09 AM java.util.prefs.FileSystemPreferences
checkLockFile0ErrorCode
WARNING: Could not lock System prefs. Unix error code -264946424.
```

Solution:

This is related to Java bug 4838770. The `/etc/.java/.systemPrefs` directory may not have been created on your system. See <http://bugs.sun.com> for details.

This is an issue with your installation of Java and does not affect the Oracle Retail product installation.

ConcurrentModificationException in Installer GUI

Symptom:

In GUI mode, the errors tab shows the following error:

```
java.util.ConcurrentModificationException
    at
java.util.AbstractList$Itr.checkForComodification(AbstractList.java:448)
    at java.util.AbstractList$Itr.next(AbstractList.java:419)
... etc
```

Solution:

You can ignore this error. It is related to third-party Java Swing code for rendering of the installer GUI and does not affect the retail product installation.

“Couldn't find X Input Context” Warnings

Symptom:

The following text appears in the console window during execution of the installer in GUI mode:

```
Couldn't find X Input Context
```

Solution:

This message is harmless and can be ignored.

Error While Unpacking the rsl-rms.ear File

Symptom:

The following text appears in the console window during execution of the installer:

```
07/12/19 10:53:17 Notification ==>Error while unpacking rsl-rms.ear  
java.util.zip.ZipException: error in opening zip file
```

Solution:

This is a known bug (BugID 6330834) related to Solaris and NFS in Oracle Application Server 10.1.3.3.

Follow the workaround below documented for this bug.

In the opmn.xml file in \$ORACLE_HOME/opmn/conf, add the following parameter to the java-options for the instance you are installing:

```
-Doc4j.autoUnpackLockCount=-1
```

After making this change you should reload OPMN, restart the affected OC4J instance(s), and retry the retail application installation.

Appendix: URL Reference

The application installers for the RSLfor<App> product will ask for several different URLs. These include the following.

JDBC URL for a Database

Used by the Java application and by the installer to connect to the database.

Syntax

```
jdbc:oracle:thin:@<host>:<port>:<sid>
```

where:

- <host> is the hostname of the database server.
- <port> is the database listener port.
- <sid> is the system identifier for the database.

Example:

```
jdbc:oracle:thin:@myhost:1521:mysid
```

JNDI Provider URL for an Application

Used by the application client to access the application running in the server. Also used by other applications for server-to-server calls.

Syntax

```
opmn:ormi://<host>:<port>:<instance>/<app>
```

where:

- <host> is the hostname of the OracleAS environment
- <port> is the OPMN request port of the OracleAS environment. This can be found in the <ORACLE_HOME>/opmn/conf/opmn.xml file.
- <instance> is the name of the OC4J instance running the application
- <app> is the deployment name for the application.

Example:

```
opmn:ormi://myhost:6003:rs1-oc4j/rs1-rms
```

Note: The JNDI provider URL can have a different format depending on your cluster topology. Consult the Oracle Application Server documentation for further details.

Deployer URI

Used by the Oracle ANT tasks to deploy an application to an OC4J group. The application installer does not ask the user for this value; it is constructed based on other inputs and written to the `ant.install.properties` file for input to the installation script. For repeat installations using silent mode, you may need to correct mistakes in the deployer URI in `ant.install.properties`.

Note: There are several different formats for the deployer URI depending on your cluster topology. Consult the *Deploying with the OC4J Ant Tasks* chapter of the *OC4J Deployment Guide* for further details.

Syntax (managed OC4J)

`deployer:cluster:opmn://<host>:<port>/<group>`

where:

- `<host>`: hostname of the OracleAS environment
- `<port>`: OPMN request port of the OracleAS environment. This can be found in the `<ORACLE_HOME>/opmn/conf/opmn.xml` file.
- `<group>`: Name of the OC4J instance where the application will be deployed.

Example: `deployer:cluster:opmn://myhost:6003/rsl_group`

Syntax (standalone OC4J)

`deployer:oc4j:<host>:<port>`

where:

- `<host>` is the hostname of the OracleAS environment
- `<port>` is the RMI port of the OC4J server. This can be found in the `ORACLE_HOME/j2ee/home/config/rmi.xml` file.

Example:

`deployer:oc4j:myhost:23791`

Appendix: Installation Order

This section provides a guideline as to the order in which the Oracle Retail applications should be installed. If a retailer has chosen to use some, but not all, of the applications the order is still valid less the applications not being installed.

1. Oracle Retail Merchandising System (RMS), Oracle Retail Trade Management (RTM), Oracle Retail Sales Audit (ReSA)
2. Oracle Retail Service Layer (RSL)
3. Oracle Retail Extract, Transform, Load (RETL)
4. Oracle Retail Active Retail Intelligence (ARI)
5. Oracle Retail Warehouse Management System (RWMS)
6. Oracle Retail Allocation
7. Oracle Retail Invoice Matching (ReIM)
8. Oracle Retail Price Management (RPM)

Note: During installation of RPM, you are asked for the RIBforRPM provider URL. Since RIB is installed after RPM, make a note of the URL you enter. If you need to change the RIBforRPM provider URL after you install RIB, you can do so by editing the `jndi_provider.xml` file.

9. Oracle Retail Central Office (ORCO)
10. Oracle Retail Back Office (ORBO) or Back Office with Labels and Tags (ORLAT)
11. Oracle Retail Store Inventory Management (SIM)

Note: During installation of SIM, you are asked for the AIP provider URL. Since AIP is installed after SIM, make a note of the URL you enter. If you need to change the AIP provider URL after you install AIP, you can do so by editing the `jndi_providers_ribclient.xml` file.

12. Oracle Retail Predictive Application Server (RPAS)
13. Oracle Retail Merchandise Financial Planning (MFP)
14. Oracle Retail Size Profile Optimization (SPO)
15. Oracle Retail Assortment Planning (AP)
16. Oracle Retail Item Planning (IP)
17. Oracle Retail Item Planning configured for COE (IPCOE)
18. Oracle Retail Advanced Inventory Planning (AIP)
19. Oracle Retail Integration Bus (RIB)
20. Oracle Retail Point-of-Service (ORPOS)
21. Oracle Retail Mobile Point-of-Service (ORMPOS)
22. Oracle Retail Analytics Applications
23. Oracle Retail Data Warehouse (RDW)
24. Oracle Retail Workspace (ORW)